

Model or Name: DWAM83
Description: RF Module

Document No.:

Version: 0.5
Issue Date: 2013-07-08

Restricted and Confidential Information Statement:

All information contained in this document is the exclusive property of GoerTek Electronics, Inc. and its development partners. Any reproduction or disclosure of all or part of this document without the expressed written consent of GoerTek is strictly prohibited.

Table of Contents

| | |
|---|----|
| 1 Document Scope and Intention | 5 |
| 2 Applicable Standards, Documents and References..... | 5 |
| 3 Glossary | 5 |
| 4 Product Application Overview | 6 |
| 5 Product Outline | 6 |
| 6 Electric Characteristics | 7 |
| 6.1 Block Diagram | 7 |
| 6.2 Key Components List | 7 |
| 7 Recommended Operating Conditions | 8 |
| 8 DC Characteristics..... | 8 |
| 9 Power consumption..... | 8 |
| 10 RF Characteristics | 9 |
| 11 Interface Definition..... | 10 |
| 12 Firmware Version..... | 12 |
| 13 Packing and Marks..... | 12 |
| 13.1 Module Label | 12 |

Publication History

| No. | Version | Release issue | Prepared by | Release date |
|-----|---------|------------------------------------|-------------|--------------|
| 1 | V0.1 | Draft version | | 2013-03-04 |
| 2 | V0.2 | Sensitivity condition modification | | 2013-05-28 |
| 3 | V0.3 | Packing Proposal Update | | 2013-06-20 |
| 4 | V0.4 | Add Note1.Note2 for 5.2G | | 2013-06-26 |
| 5 | V0.5 | Update the typical out power value | | 2013-07-08 |
| 6 | | | | |
| 7 | | | | |
| 8 | | | | |
| 9 | | | | |
| 10 | | | | |

**Wireless Module
1492549
Type Specification**

1. Communication Method: Half Duplex Mode
2. Transmission
 - a) 2.4G

| PARAMETER | | CONDITION | MIN | TYP | MAX | UNITS |
|---|-------------------|--------------------------|------|----------------------|--------|-------|
| RF Frequency Range | | | 2400 | - | 2483.5 | MHz |
| Number of RF-channels | | Carriers in the spectrum | - | 3 | - | |
| Transmission Power | | | | 14 | | dBm |
| Channel Frequency (dynamic or fixed allocation) | CH1 CH2 CH3 | | | 2412 2438 2464 | - | MHz |

b) 5.2G

| PARAMETER | | CONDITION | MIN | TYP | MAX | UNITS |
|---|-------------------|--------------------------|------|----------------------------------|------|-------|
| RF Frequency Range | | | 5150 | - | 5250 | MHz |
| Number of RF-channels | | Carriers in the spectrum | - | 3 | - | |
| Transmission Power | | | | 9 | | dBm |
| Channel Frequency (dynamic or fixed allocation) | CH1 CH2 CH3 | | | 5180 5210 (Note 1) 5240 | - | MHz |

Note 1: For Japan, RF channel 2 will be 5200MHz

c) 5.8G

| PARAMETER | | CONDITION | MIN | TYP | MAX | UNITS |
|---|-------------------|--------------------------|------|----------------------|------|-------|
| RF Frequency Range | | | 5725 | - | 5875 | MHz |
| Number of RF-channels | | Carriers in the spectrum | - | 3 | - | |
| Transmission Power | | | | 9 | | dBm |
| Channel Frequency (dynamic or fixed allocation) | CH1 CH2 CH3 | | | 5736 5762 5814 | - | MHz |

d) Modulation: QPSK

3. Antenna Peak Gain:2.8dBi
4. Applicant: Sony
5. Product Name: DWAM83 Wireless Module
6. Model Name: 1492549

1 Document Scope and Intention

The information in this document provides detailed specifications for the Cocoa. All features and requirements are described hereunder, including mechanical, electrical, software and reliability.

This document is released to ensure final production units comply with all requirements and may be updated as necessary.

2 Applicable Standards, Documents and References

STM-1131 Ink and Printed Parts – Quality Standard
STM-1208 Paint and Painted Parts – Quality Standard
STM-1269 Drop Test Methods for Mobile Products
STM-1284 Vapor-Deposited Parts Quality Standards

3 Glossary

| | |
|------|---|
| FFC | Flexible Flat Cable |
| FPC | Flexible Printed Circuit |
| EMC | Electromagnetic Compatibility |
| FCC | Federal Communications Commission |
| IEC | International Electro-technical Commission |
| RoHS | Restriction of Hazardous Substances |
| UUT | Unit Under Test |
| WEEE | Waste Electrical and Electronic Equipment Directive |
| TBD | To Be Determined |

Table1 Glossary

4 Product Application Overview

Cocoa is a digital wireless audio module base on DARR83 wireless audio processor. It is an uncompressed wireless digital audio transceiver operating in 2.4GHz, 5.2 GHz and 5.8 GHz bands. Cocoa supports point to point connection and bidirectional data transfer. It's built in 4M SPI Interface flash, and has a 26pins interface connector for power, digital audio and control interface and GPIOs. It offers seamless audio connectivity for a wide range of wireless audio devices.

5 Product Outline

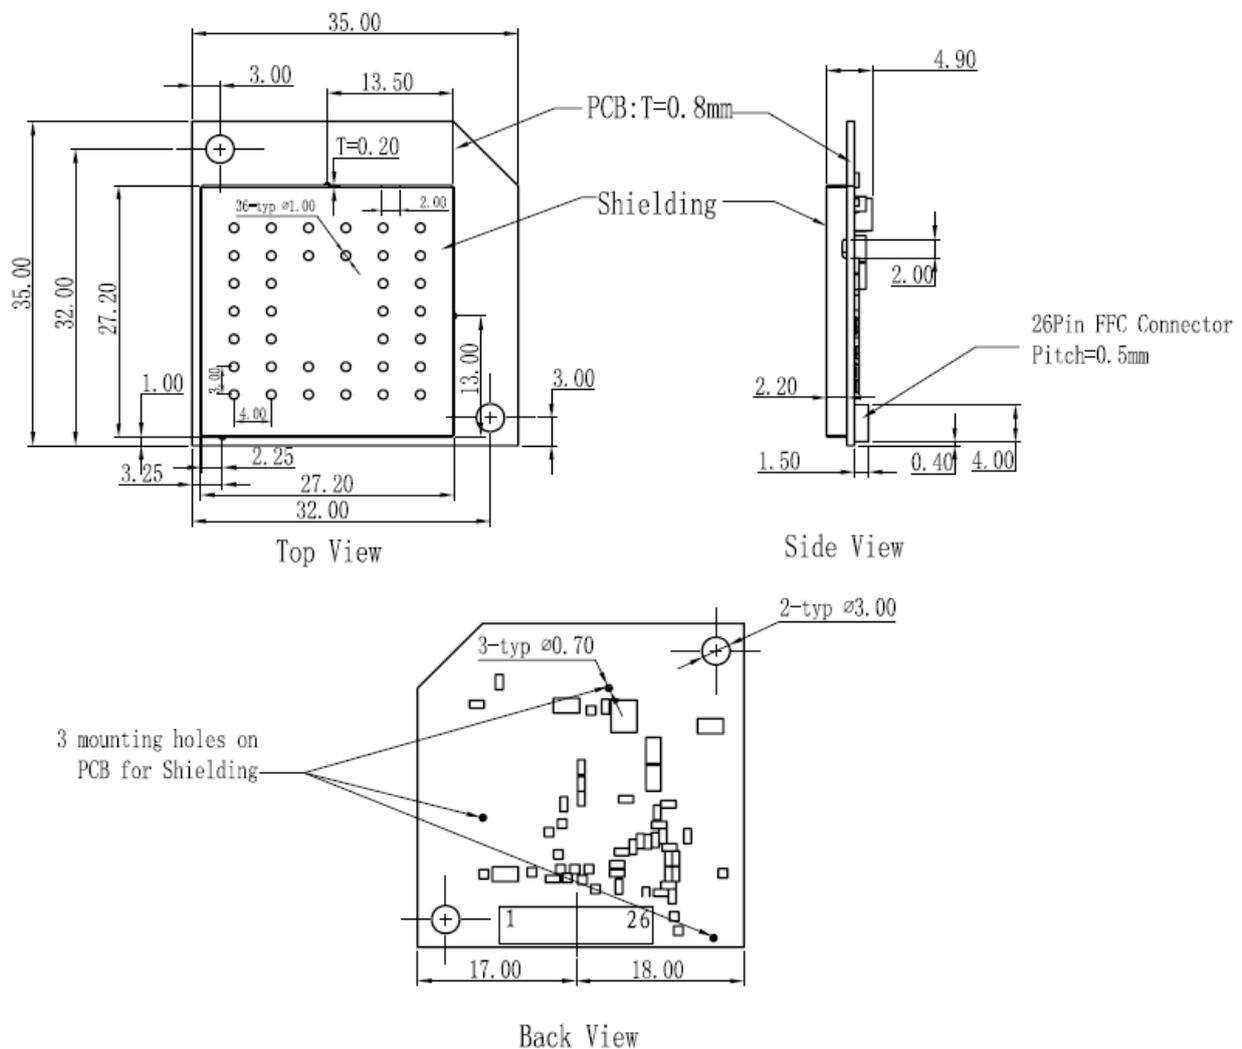


Figure1 Cocoa Outline Drawings

Module size: 35 x 35 x 43 mm (± 0.15), including 2-Printed Tri-Band antennas
Diameter mounting holes: 3.0mm (± 0.05)

6 Electric Characteristics

6.1 Block Diagram

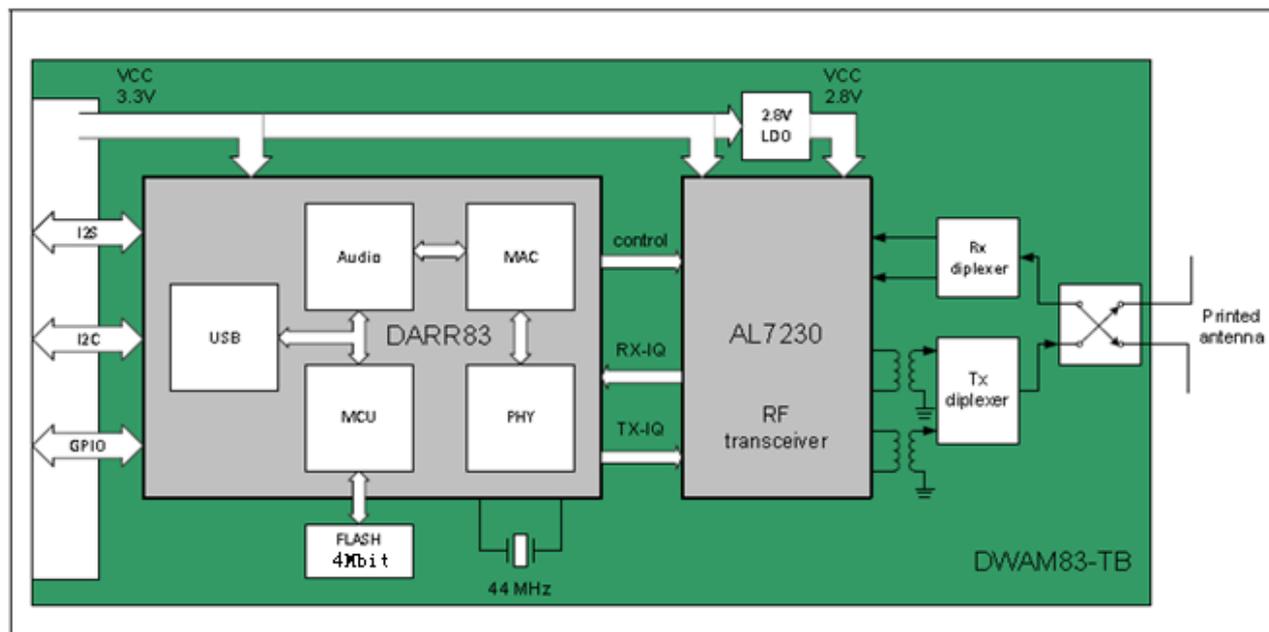


Figure2 Cocoa Module Block Diagram

6.2 Key Components List

| No | Part Name | Qty | Description | Supplier P/N | Supplier |
|----|-------------|-----|---|--------------------|----------|
| 1 | BASEBAND IC | 1 | STS Audio Baseband Chip | DARR83 | SMSC |
| 2 | RADIO IC | 1 | 802.11a/b/g RF IC, 2.4~2.5 GHz and 4.9 ~ 5.9 GHz | AL7230S | Airoha |
| 3 | RF SWITCH | 1 | 2.4GHz and 6GHz Dual-Band Wireless Lan | Upq2164t5n | NEC |
| 4 | BALUN | 1 | Balun 50:100, 2400~2500MHz | BL2012-10B2450T/LF | ACX |
| 5 | BALUN | 1 | Balun, 50:50, 5512 ±363MHz | LDB215G5105C-001 | MURATA |
| 6 | DIPLEXER | 2 | DIPLEXER, 2450.00±50.00MHZ/5425.00±525.00MHZ | LFD212G45DF5B859 | MURATA |
| 7 | CRYSTAL | 1 | 44MHz, Frequency Tolerance:±10ppm, Temperature Characteristics:±10ppm, CL:6pF | EXS00A-CS04137 | NDK |

| No | Part Name | Qty | Description | Supplier P/N | Supplier |
|----|-----------|-----|--|-----------------|------------|
| 8 | REGULATOR | 1 | Output voltage: 2.8V, 300mA high speed, extremely low noise CMOS LDO regulator | AP2125K-2.8TRG1 | BCD |
| 9 | SPI Flash | 1 | SPI Flash ,4M bits,2.7~3.6,700,SOP-8 | GD25Q40TIGR | Gigadevice |

Table2 Key Components List

7 Recommended Operating Conditions

| SYMBOL | PARAMETER | MIN | TYP | MAX | UNIT |
|--------|-----------------------|-----|-----|-----|------|
| Vcc | Supply Voltage | 3.1 | 3.3 | 3.5 | V |
| VESD | ESD Contact Discharge | -2 | - | +2 | KV |
| Tamb | Operating Temperature | -10 | 25 | 60 | °C |

Table3 Recommended Operating Conditions

Connection: 0.5mm*26pin connector

Control Interface: I²C

Audio Interface: I²S S/PDIF

8 DC Characteristics

| SYMBOL | PARAMETER | MIN | TYP | MAX | UNIT |
|------------|--------------------------|-----|-----|-----|------|
| Vcc Ripple | Peak to peak Ripple | | 0 | 100 | mV |
| Tr | Rise time of Reset | | | 10 | ms |
| Tf | Fall time of Reset | | | 10 | ms |
| Treset | Reset signal pulse width | 1 | | | ms |

Table4 DC Characteristics

9 Power consumption

Vcc=3.3V, Ambient temperature 25°C

| SYMBOL | PARAMETER | MIN | TYP | MAX | UNIT |
|--------|----------------------------|-----|-----|-----|------|
| Ii | Power down current | | 23 | | mA |
| Im24 | Continuous TX current@2.4G | | 360 | | mA |
| Im52 | Continuous TX current@5.2G | | 320 | | mA |

| SYMBOL | PARAMETER | MIN | TYP | MAX | UNIT |
|--------|----------------------------|-----|-----|-----|------|
| Im58 | Continuous TX current@5.8G | | 320 | | mA |

Table5 Power consumption

10 RF Characteristics

Cocoa transceiver/Receiver operates in 2.4GHz, 5.2 GHz and 5.8 GHz bands.

| PARAMETER | | CONDITION | MIN | TYP | MAX | UNITS |
|---|-------------------|-----------------------------|------|----------------------|--------|-------|
| RF Frequency Range | | | 2400 | - | 2483.5 | MHz |
| Number of RF-channels | | Carriers in the spectrum | - | 3 | - | |
| Transmission Power | | Depending on antenna design | | 13 | | dBm |
| Channel Frequency (dynamic or fixed allocation) | CH1 CH2 CH3 | | | 2412 2438 2464 | - | MHz |
| Channel Spacing | | | | 26 | | MHz |
| RF Bandwidth | | Null-to-null | | 22 | | MHz |
| RX Sensitivity | | PER<5% | - | - | -80 | |

Table6 RF Performance of 2.4G Application (Vcc=3.3V, 25°C)

| PARAMETER | | CONDITION | MIN | TYP | MAX | UNITS |
|---|-------------------|-----------------------------|------|----------------------------------|------|-------|
| RF Frequency Range | | | 5150 | - | 5250 | MHz |
| Number of RF-channels | | Carriers in the spectrum | - | 3 | - | |
| Transmission Power | | Depending on antenna design | | 9 | | dBm |
| Channel Frequency (dynamic or fixed allocation) | CH1 CH2 CH3 | | | 5180 5210 (Note 1) 5240 | - | MHz |
| Channel Spacing | | | | 30 (Note 2) | | MHz |
| RF Bandwidth | | Null-to-null | | 17 | | MHz |
| RX Sensitivity | | PER<5% | - | - | -80 | |

Note 1: For Japan, RF channel 2 will be 5200MHz

Note 2: The Default channel spacing is 30MHz, a 20MHz channel space will be used for Japan

Table7 RF Performance of 5.2G Application (Vcc=3.3V, 25°C)

| PARAMETER | | CONDITION | MIN | TYP | MAX | UNITS |
|---|-------------------|-----------------------------|------|----------------------|------|-------|
| RF Frequency Range | | | 5725 | - | 5875 | MHz |
| Number of RF-channels | | Carriers in the spectrum | - | 3 | - | |
| Transmission Power | | Depending on antenna design | | 9 | | dBm |
| Channel Frequency (dynamic or fixed allocation) | CH1 CH2 CH3 | | | 5736 5762 5814 | - | MHz |
| Channel Spacing | | | | 26 | | MHz |
| RF Bandwidth | | Null-to-null | | 22 | | MHz |
| RX Sensitivity | | PER<5% | | | -78 | |

Table8 RF Performance of 5.8G Application (Vcc=3.3V, 25°C)

11 Interface Definition

The Module interface is an 26pin FFC .

Spec of FFC connector:

- 0.5mm pitch FPC/FFC connector
- 26 ways, Right Angle Type (double face contact)
- LIF SMT Type
- Tin/Nickel (Lead-Free)
- Halogen Free

| PIN NUMBER | PIN NAME | I/O | DESCRIPTION |
|------------|----------------|--------|--|
| 1 | VDD | Power | Regulated 3.3V input |
| 2 | GND | Ground | Ground |
| 3 | MCLK | In | 12.288MHz audio clock In |
| 4 | DARR83_GPIO_2 | I/O | Software configurable. Please refer to the DARR83 datasheet |
| 5 | DARR83_GPIO_7 | I/O | Configurable. Please refer to the DARR83 datasheet |
| 6 | DARR83_GPIO_4 | I/O | Configurable. Please refer to the DARR83 datasheet |
| 7 | DARR83_GPIO_23 | I/O | Configurable. Please refer to the DARR83 datasheet |
| 8 | DARR83_GPIO_13 | I/O | Configurable. Please refer to the DARR83 datasheet |
| 9 | DARR83_GPIO_3 | I/O | Configurable. Please refer to the DARR83 datasheet |
| 10 | DARR83_GPIO_15 | I/O | Configurable. Please refer to the DARR83 datasheet |
| 11 | NC | | NOT CONNECTED |
| 12 | NC | | NOT CONNECTED |
| 13 | DARR83_GPIO_24 | I/O | Configure as MON_TXD |
| 14 | DARR83_GPIO_14 | I/O | Software configurable as IRQ |
| 15 | DARR83_GPIO_1 | I/O | Default configured as WP, it's preferred to leave this pin NC. |
| 16 | NC | | NOT CONNECTED |
| 17 | DARR_RST | | DARR83 RESET (an external reset circuit is required) |
| 18 | I2C_SCL_SLV | | I2C SLAVE (SCLK) |
| 19 | I2C_SDA_SLV | | I2C SLAVE (SDA) |
| 20 | DARR83_GPIO_12 | I/O | By default configured as SDIO Z |
| 21 | DARR83_GPIO_11 | I/O | By default configured as SDIO X |
| 22 | DARR83_GPIO_10 | I/O | By default configured as LRCK W |
| 23 | GND | Ground | Ground |
| 24 | DARR83_GPIO_8 | I/O | By default configured as BCK W |
| 25 | DARR83_GPIO_6 | I/O | By default configured as SDIO Y |
| 26 | DARR83_GPIO_5 | I/O | By default configured as SDIO W |

Table9 26pin FFC Definition


12 Firmware Version

FW is provided by customer.

FW Version: WSLIB_DWAM83_8052_S012.BIN
(Maybe updated base on customer release)

13 Packing and Marks

13.1 Module Label

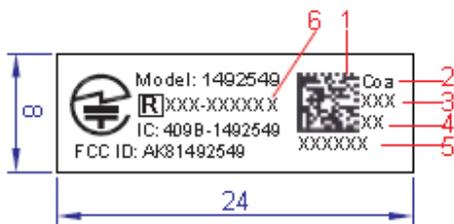

Notes:

1. QR code:

barcode rules:

X X XXX X XXXXXX

Serial No., 6 digits, 000001~FFFFFF

Line No.

Production date, in format of YMD:

Y-year, e.g 3=2013, 4=2014,

M-month, 1=Jan., 2=Feb.,, 9=Sep., A=Oct., B=Nov., C=Dec.;

D-day, see below appendix.

Factory Code: 1--Guangdianyuan SMT; 2--Qingchi SMT.

Product Code: K

2. Project code abbreviation: Coa;

3. Production date, in format of YMD, same as the production date of QR code;

4. Project Phase;


5. Serial No., same as the serial No. of QR code;

6. Telec logo and product designation, **designation "XXX-XXXXXX" is TBD.**



13.2 Carton Label

Size: 100*96mm; Material: Art Paper

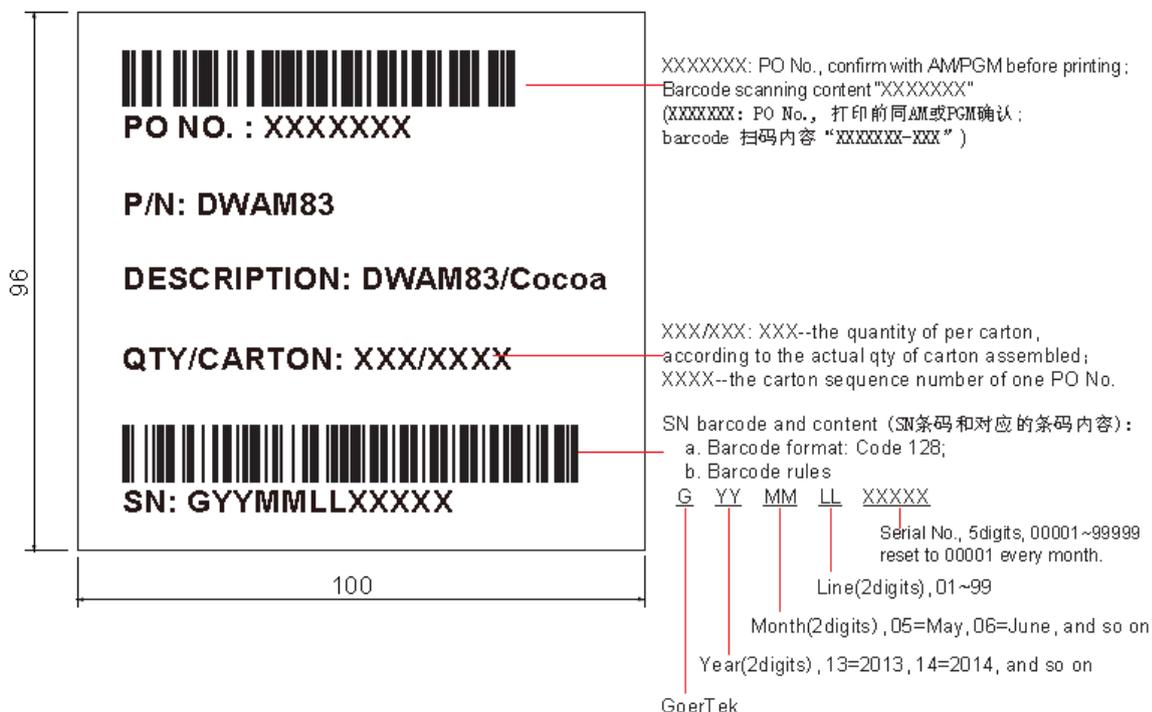

FCC Compliance Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation. This device must accept any interference received, including interference that may cause undesired operation. Product that is a radio transmitter is labeled with FCC

ID.

FCC Caution:

(1) Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

(2) The module's FCC ID is not visible when installed in the host, or

(3) If the host is marketed so that end users do not have straight forward commonly used methods for access to remove the module so that the FCC ID of the module is visible; then an additional permanent label referring to the enclosed module: Contains Transmitter Module FCC ID: AK81492549 or Contains FCC ID: AK81492549 must be used.

(4) This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

IC Radiation Exposure Statement for Canada

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

-----END-----