

TEST REPORT

Product : H2S
Trade mark : bambulab
Model/Type reference : PF003-S, PF003-L
Serial Number : N/A
Report Number : EED32R80469601
FCC ID : 2A6J8-PF003S
Date of Issue : Aug. 21, 2025
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Shenzhen Tuozhu Technology Co., Ltd.
903, West Zone, Hengchang Science and Technology Building,
No. 2228 Linhai Avenue, Nanshan Street, Qianhai Shengang
Cooperation Zone, Shenzhen

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Park, Zone 70, Bao'an District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Keven Tan.

Keven Tan

Reviewed by:

Frazer. Li

Frazer Li

Approved by:

Aaron Ma

Aaron Ma

Date:

Aug. 21, 2025



Check No.:4841020425

1 Content

1 CONTENT	2
2 TEST SUMMARY	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 TEST CONFIGURATION	6
3.4 TEST ENVIRONMENT	7
3.5 DESCRIPTION OF SUPPORT UNITS	7
3.6 TEST LOCATION	7
3.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	8
4 EQUIPMENT LIST	9
5 TEST RESULTS AND MEASUREMENT DATA	12
5.1 ANTENNA REQUIREMENT	12
5.2 AC POWER LINE CONDUCTED EMISSIONS	13
5.3 MAXIMUM CONDUCTED OUTPUT POWER	20
5.4 DTS BANDWIDTH	21
5.5 MAXIMUM POWER SPECTRAL DENSITY	22
5.6 BAND EDGE MEASUREMENTS AND CONDUCTED SPURIOUS EMISSION	23
5.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	24
6 APPENDIX A	90
7 PHOTOGRAPHS OF TEST SETUP	91
8 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	93

2 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	PASS
DTS Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	PASS
Band edge measurements	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Radiated Spurious Emission & Restricted bands	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS

Remark:

Model No.: PF003-S, PF003-L

All model was tested. They have same electrical, PCB and layout, only the model name are different.

PF003-S (model no.) is identical with the model PF003-L (model no.) on circuitry design, PCB layout, electrical components used, internal wiring of main frame parts, and only different are PF003-L can support below accessories to realize more functions than PF003-S:

1. One laser module (Bambu Lab Laser Module 10W/ SL001);
2. One cutting module (Bambu Lab Cutting Module/ SC001);
3. One pump module (Built-in Air Pump/ FAC124);
4. One emergency stop switch;
5. Different enclosure materials, PF003-L uses laser protection material while PF003-S uses transparent glass.

So the report only presents the test data for model PF003-S.

3 General Information

3.1 Client Information

Applicant:	Shenzhen Tuozhu Technology Co., Ltd.
Address of Applicant:	903, West Zone, Hengchang Science and Technology Building, No. 2228 Linhai Avenue, Nanshan Street, Qianhai Shengang Cooperation Zone, Shenzhen
Manufacturer:	Shenzhen Tuozhu Technology Co., Ltd.
Address of Manufacturer:	903, West Zone, Hengchang Science and Technology Building, No. 2228 Linhai Avenue, Nanshan Street, Qianhai Shengang Cooperation Zone, Shenzhen
Factory:	Shenzhen Zhuhe Technology Co., Ltd.
Address of Factory:	Building M, No.28 Dayang Road, Rentian Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province

3.2 General Description of EUT

Product Name:	H2S
Model No.:	PF003-S, PF003-L
Test Model No.:	PF003-S, PF003-L
Trade mark:	bambulab
Product Type:	☐ Mobile ☐ Portable ☒ Fixed Location
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	IEEE for 802.11b: DSSS(CCK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,QPSK,BPSK)
Number of Channel:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Antenna Type:	Internal Antenna
Antenna Gain:	3.1dBi
Power Supply:	Model: MS-TA460J240-350B0 INPUT: 100-240V~ 50/60Hz 5A max. OUTPUT: 350.4W 24.0V/14.6A
	Model: PMR-24V320W1AT INPUT: 100-240V~ 50/60Hz 4A OUTPUT: 24.0V/13.4A
	Model: A-350FKD-24P-B0 INPUT: 100-240V~ 50/60Hz 4.5A OUTPUT: 24.0V/14.6A
Test Voltage:	AC 110V
Sample Received Date:	Jun. 4, 2025
Sample tested Date:	Jun. 10, 2025 to Aug. 13, 2025

Operation Frequency each of channel (802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel (802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency		
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The highest channel	2462MHz

802.11n (HT40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The highest channel	2452MHz

3.3 Test Configuration

EUT Test Software Settings:	
Test Software:	ADB
EUT Power Grade:	Default
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.	
Test Mode:	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n(HT20) and MCS0 for 802.11n(HT40).	

3.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

3.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Netbook	Asus	FL8700JP1065- 0D8GXYQ2X10	FCC&CE	CTI

3.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

3.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Communication test set	R&S	CMW500	107929	06-26-2024 06-16-2025	06-25-2025 06-15-2026
Signal Generator	R&S	SMBV100A	1407.6004K02- 262149-CV	09-02-2024	09-01-2025
RF control unit(power unit)	MWRF-test	MW100-RFCB	MW220620CTI-42	06-26-2024 06-16-2025	06-25-2025 06-15-2026
High-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	11-30-2024	11-29-2025
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	05-29-2024 05-26-2025	05-28-2025 05-25-2026
BT&WI-FI Automatic test software	MWRF-test	MTS 8310	V2.0.0.0	N/A	N/A
Spectrum Analyzer	R&S	FSV3044	101509	02-14-2025	02-13-2026

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-08-2025	04-07-2026
Temperature/ Humidity Indicator	Defu	TH128	/	03-31-2025	03-30-2026
LISN	R&S	ENV216	100098	09-19-2024	09-18-2025
Barometer	changchun	DYM3	1188	05-14-2025	05-13-2026
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	N/A	N/A
Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-18-2024 06-07-2025	06-17-2025 06-06-2026
ISN	TESEQ	ISN T800	30297	12-05-2024	12-04-2025

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	01/13/2024	01/12/2027
Receiver	R&S	ESC17	100938-003	09/07/2024	09/06/2025
Spectrum Analyzer	R&S	FSV40	101200	07/18/2024 07/17/2025	07/17/2025 07/16/2026
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/14/2025	05/13/2026
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/07/2025	04/06/2026
Microwave Preamplifier	Tonscend	EMC051845SE	980380	12/05/2024	12/04/2025
Horn Antenna	A.H.SYSTEMS	SAS-574	374	07/02/2023	07/01/2026
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/07/2025	04/06/2026
Preamplifier	Agilent	11909A	12-1	03/03/2025	03/02/2026
Preamplifier	CD	PAP-1840-60	6041.6042	05/26/2025	05/25/2026
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	N/A	N/A
Cable line	Fulai(7M)	SF106	5219/6A	01/13/2024	01/12/2027
Cable line	Fulai(6M)	SF106	5220/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5216/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5217/6A	01/13/2024	01/12/2027


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2024	01-08-2027
Receiver	Keysight	N9038A	MY57290136	01-04-2025	01-03-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	01-14-2025	01-13-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	01-14-2025	01-13-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-12-2025	04-11-2026
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-12-2025	04-11-2026
Horn Antenna	ETS-LINDGREN	3117	57407	07-03-2024 06-29-2025	07-02-2025 06-28-2026
Preamplifier	EMCI	EMC001330	980563	03-03-2025	03-02-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-18-2024 07-07-2025	07-17-2025 07-06-2026
Preamplifier	Tonscend	EMC051845SE	980380	12-05-2024	12-04-2025
Communication test set	R&S	CMW500	102898	01-04-2025	01-03-2026
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	03-31-2025	03-30-2026
RSE Automatic test software	JS Tonscend	JS36-RSE	V4.0.0.0	N/A	N/A
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2024	01-08-2027
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2024	01-08-2027
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2024	01-08-2027

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Please see Internal photos
The antenna is Internal antenna. The best case gain of the antenna is 3.1dBi.	

5.2 AC Power Line Conducted Emissions

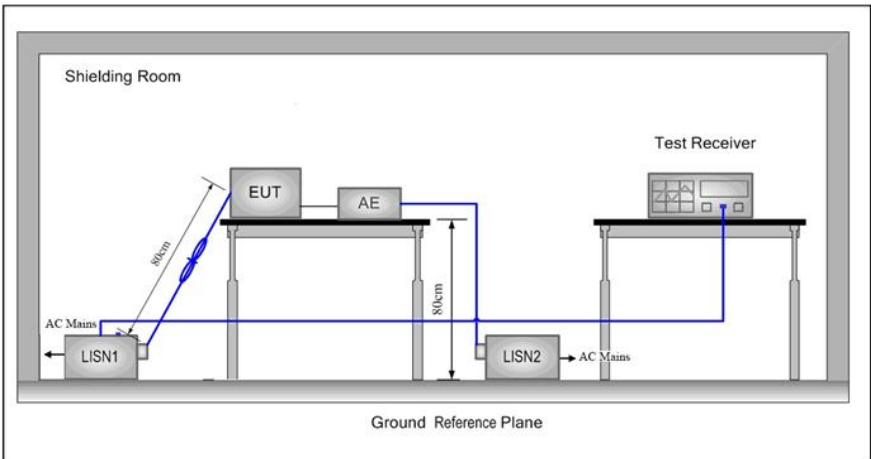
Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Setup:			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Mode:	All modes were tested, only the worse case lowest channel of 1Mbps for 802.11b was recorded in the report.		

Test Results: Pass

Measurement Data

Adapter A-350FKD-24P-B0:

Live line:

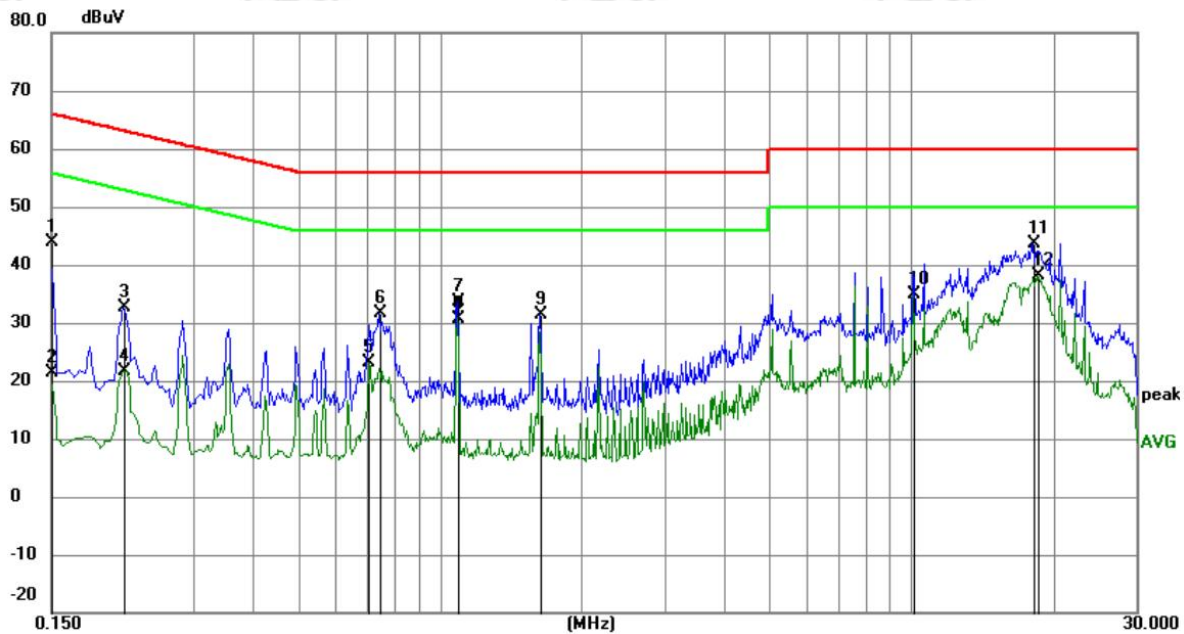


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1500	33.52	10.28	43.80	66.00	-22.20	QP	
2		0.1500	10.99	10.28	21.27	56.00	-34.73	AVG	
3		0.2130	22.33	10.20	32.53	63.09	-30.56	QP	
4		0.2130	11.41	10.20	21.61	53.09	-31.48	AVG	
5		0.7080	13.08	10.13	23.21	46.00	-22.79	AVG	
6		0.7440	21.40	10.15	31.55	56.00	-24.45	QP	
7		1.0905	23.34	10.18	33.52	56.00	-22.48	QP	
8		1.0905	20.57	10.18	30.75	46.00	-15.25	AVG	
9		1.6350	21.16	10.17	31.33	56.00	-24.67	QP	
10		10.1175	24.82	9.95	34.77	50.00	-15.23	AVG	
11		18.2175	33.76	9.82	43.58	60.00	-16.42	QP	
12	*	18.5325	28.27	9.82	38.09	50.00	-11.91	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:
80.0
dBuV

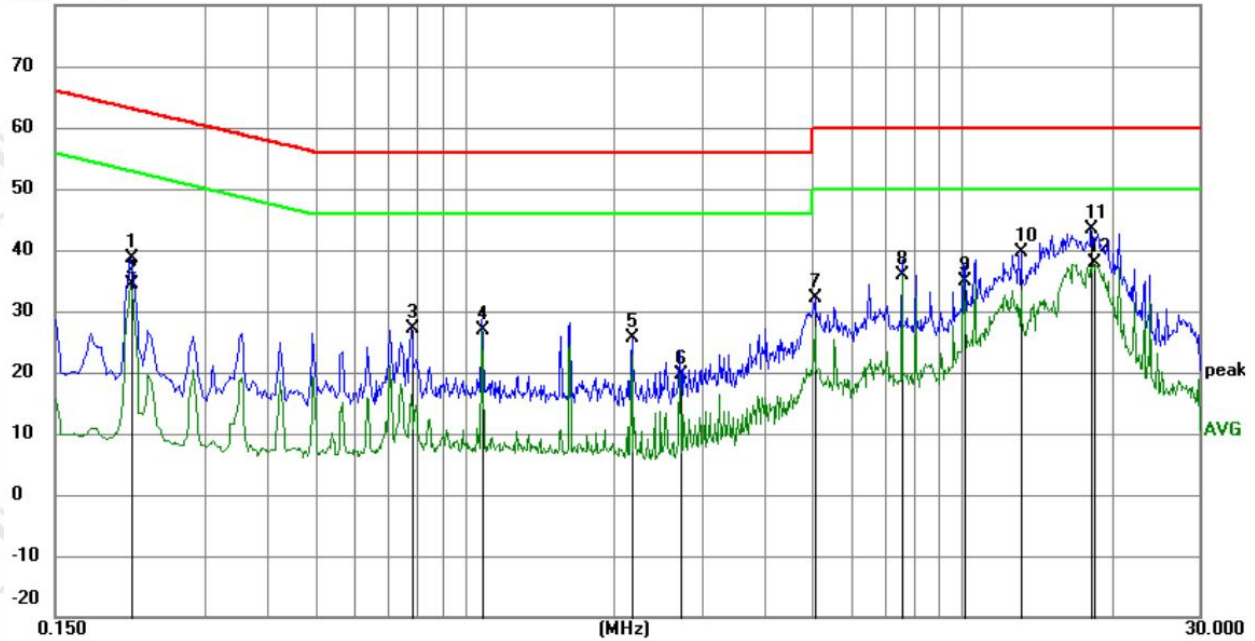


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	28.40	10.20	38.60	63.09	-24.49	QP	
2		0.2130	24.07	10.20	34.27	53.09	-18.82	AVG	
3		0.7799	16.88	10.17	27.05	56.00	-28.95	QP	
4		1.0859	16.68	10.18	26.86	46.00	-19.14	AVG	
5		2.1705	15.42	10.16	25.58	56.00	-30.42	QP	
6		2.7150	9.41	10.14	19.55	46.00	-26.45	AVG	
7		5.0595	22.18	10.06	32.24	60.00	-27.76	QP	
8		7.5885	25.98	10.01	35.99	50.00	-14.01	AVG	
9		10.1175	25.05	9.95	35.00	50.00	-15.00	AVG	
10		13.1550	29.77	9.89	39.66	60.00	-20.34	QP	
11		18.1995	33.55	9.82	43.37	60.00	-16.63	QP	
12	*	18.3435	28.02	9.82	37.84	50.00	-12.16	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Adapter: MS-TA460J240-350B0

Live line:

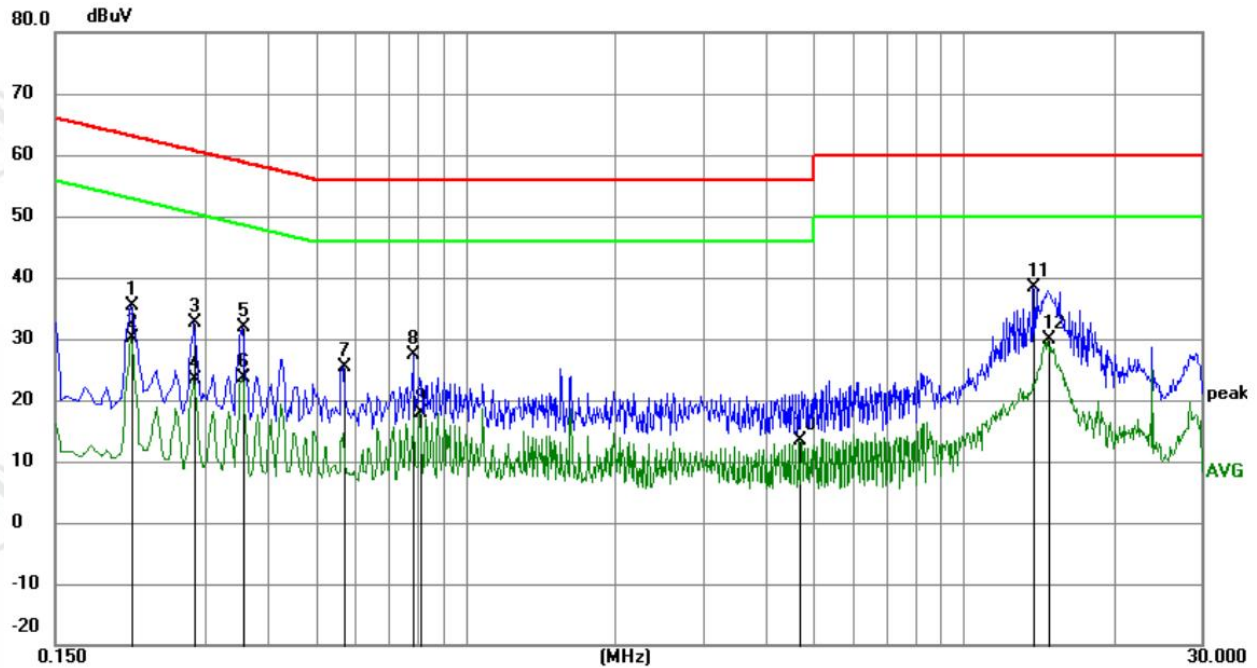


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	25.08	10.20	35.28	63.09	-27.81	QP	
2		0.2130	20.02	10.20	30.22	53.09	-22.87	AVG	
3		0.2850	22.47	10.14	32.61	60.67	-28.06	QP	
4		0.2850	13.16	10.14	23.30	50.67	-27.37	AVG	
5		0.3570	21.67	10.11	31.78	58.80	-27.02	QP	
6		0.3570	13.46	10.11	23.57	48.80	-25.23	AVG	
7		0.5685	15.21	10.09	25.30	56.00	-30.70	QP	
8		0.7845	17.28	10.17	27.45	56.00	-28.55	QP	
9		0.8115	7.66	10.18	17.84	46.00	-28.16	AVG	
10		4.6725	3.35	10.07	13.42	46.00	-32.58	AVG	
11		13.8075	28.61	9.88	38.49	60.00	-21.51	QP	
12	*	14.8020	20.07	9.86	29.93	50.00	-20.07	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:
80.0 dBuV

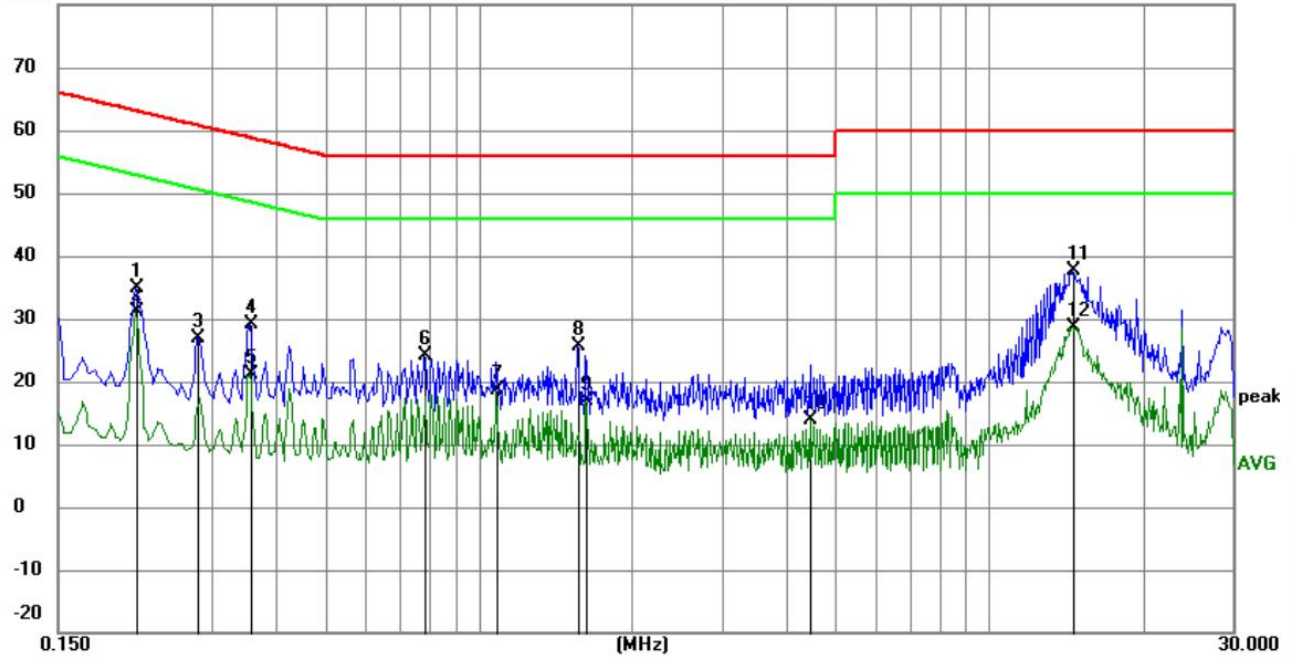


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	24.62	10.20	34.82	63.09	-28.27	QP	
2		0.2130	21.05	10.20	31.25	53.09	-21.84	AVG	
3		0.2805	16.71	10.15	26.86	60.80	-33.94	QP	
4		0.3570	18.93	10.11	29.04	58.80	-29.76	QP	
5		0.3570	10.91	10.11	21.02	48.80	-27.78	AVG	
6		0.7799	13.85	10.17	24.02	56.00	-31.98	QP	
7		1.0859	8.42	10.18	18.60	46.00	-27.40	AVG	
8		1.5630	15.51	10.17	25.68	56.00	-30.32	QP	
9		1.6260	6.67	10.17	16.84	46.00	-29.16	AVG	
10		4.4610	3.91	10.08	13.99	46.00	-32.01	AVG	
11		14.5860	27.67	9.87	37.54	60.00	-22.46	QP	
12	*	14.6580	18.74	9.87	28.61	50.00	-21.39	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Adapter PMR-24V320WIAT:

Live line:

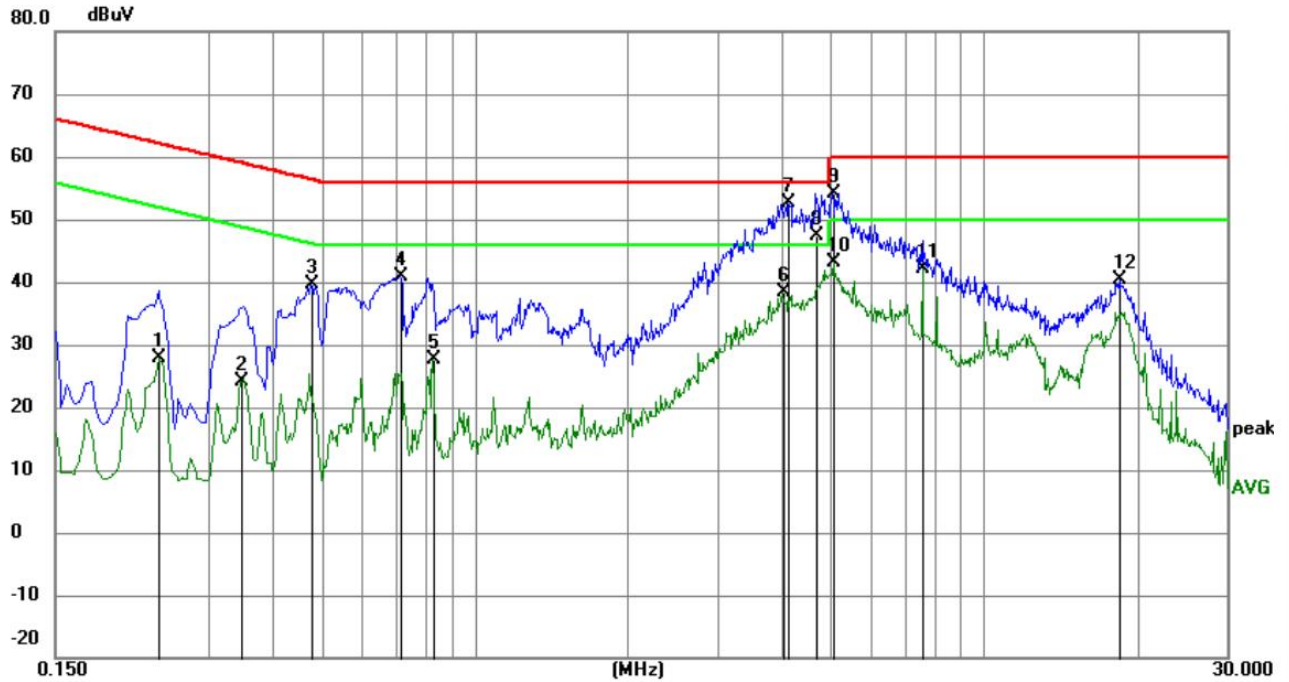


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2400	17.69	10.18	27.87	52.10	-24.23	AVG	
2		0.3483	14.12	10.11	24.23	49.00	-24.77	AVG	
3		0.4785	29.54	10.08	39.62	56.37	-16.75	QP	
4		0.7125	30.66	10.14	40.80	56.00	-15.20	QP	
5		0.8295	17.33	10.18	27.51	46.00	-18.49	AVG	
6		4.0470	28.21	10.09	38.30	46.00	-7.70	AVG	
7	*	4.1325	42.57	10.09	52.66	56.00	-3.34	QP	
8		4.6815	37.23	10.07	47.30	56.00	-8.70	QP	
9		5.0324	44.16	10.06	54.22	60.00	-5.78	QP	
10		5.0595	32.97	10.06	43.03	50.00	-6.97	AVG	
11		7.5930	32.15	10.01	42.16	50.00	-7.84	AVG	
12		18.4380	30.58	9.82	40.40	60.00	-19.60	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:
80.0 dBuV

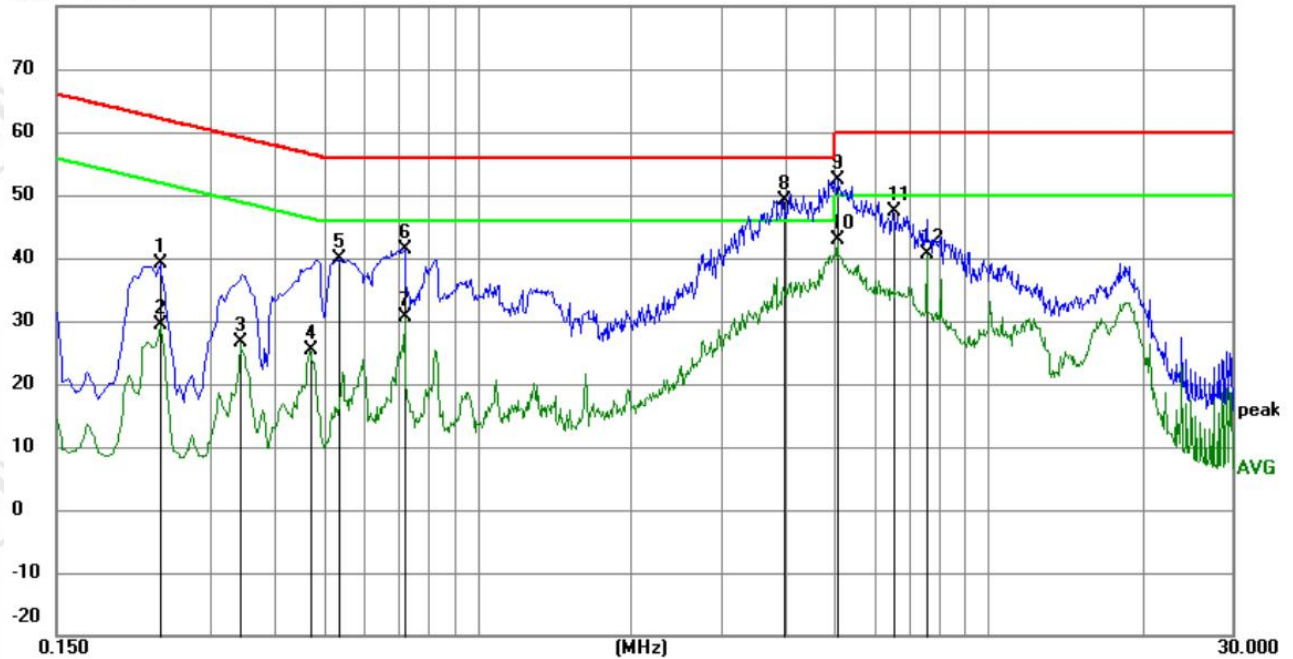


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2400	28.94	10.18	39.12	62.10	-22.98	QP	
2		0.2400	19.32	10.18	29.50	52.10	-22.60	AVG	
3		0.3435	16.42	10.11	26.53	49.12	-22.59	AVG	
4		0.4695	15.37	10.08	25.45	46.52	-21.07	AVG	
5		0.5325	29.90	10.09	39.99	56.00	-16.01	QP	
6		0.7215	31.27	10.14	41.41	56.00	-14.59	QP	
7		0.7215	20.44	10.14	30.58	46.00	-15.42	AVG	
8	*	3.9660	39.15	10.10	49.25	56.00	-6.75	QP	
9		5.0640	42.36	10.06	52.42	60.00	-7.58	QP	
10		5.0640	32.73	10.06	42.79	50.00	-7.21	AVG	
11		6.5175	37.23	10.04	47.27	60.00	-12.73	QP	
12		7.5930	30.73	10.01	40.74	50.00	-9.26	AVG	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Maximum Conducted Output Power

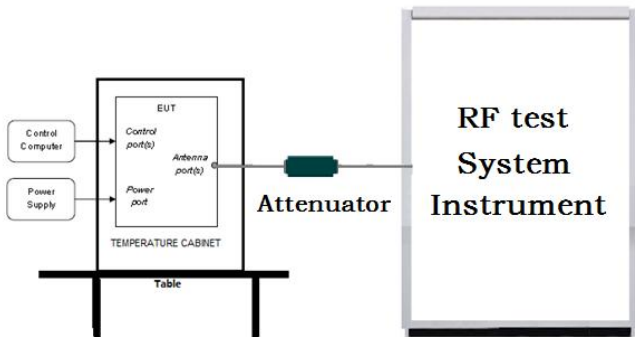Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 2013
Test Setup:	
Test Procedure:	1. PKPM1 Peak power meter measurement The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector. 2. Method AVGPM-G Average power measurement Method AVGPM-G is a measurement using a gated RF average power meter. Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
Limit:	30dBm
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A


5.4 DTS Bandwidth

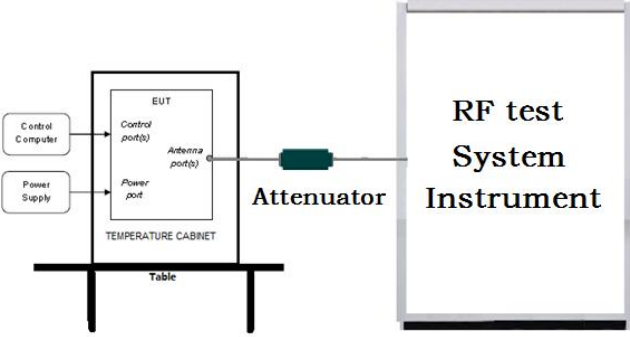Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Limit:	$\geq 500 \text{ kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

5.5 Maximum Power Spectral Density

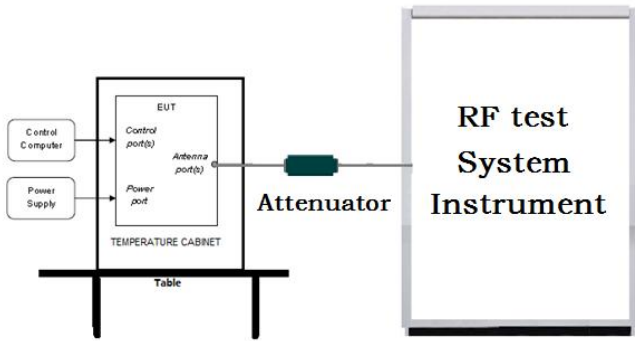Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set analyzer center frequency to DTS channel center frequency. b) Set the span to 1.5 times the DTS bandwidth. c) Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$. d) Set the VBW $> [3 \times \text{RBW}]$. e) Detector = peak. f) Sweep time = auto couple. g) Trace mode = max hold. h) Allow trace to fully stabilize. i) Use the peak marker function to determine the maximum amplitude level within the RBW. j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
Limit:	$\leq 8.00 \text{ dBm}/3 \text{ kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

5.6 Band Edge Measurements and Conducted Spurious Emission

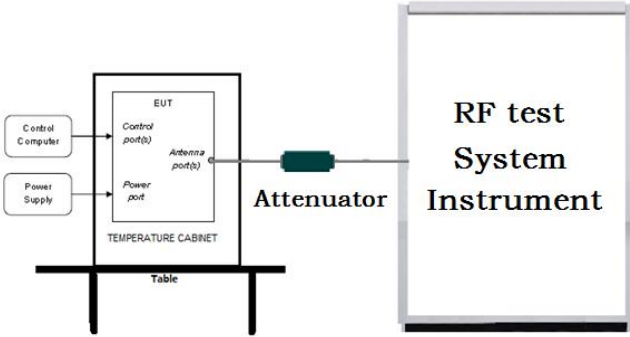Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100KHz. b) Set VBW = 300KHz. c) Sweep time = auto couple. d) Detector = peak. e) Trace mode = max hold. f) Allow trace to fully stabilize. g) Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

5.7 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:

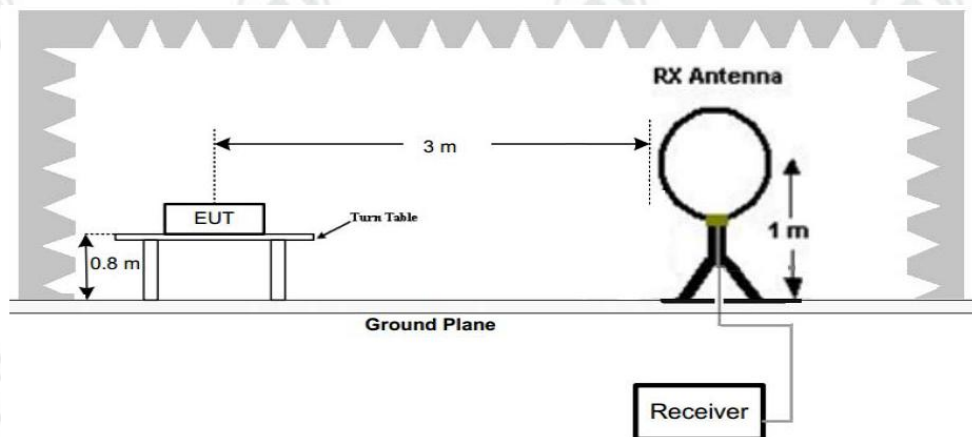


Figure 1. Below 30MHz

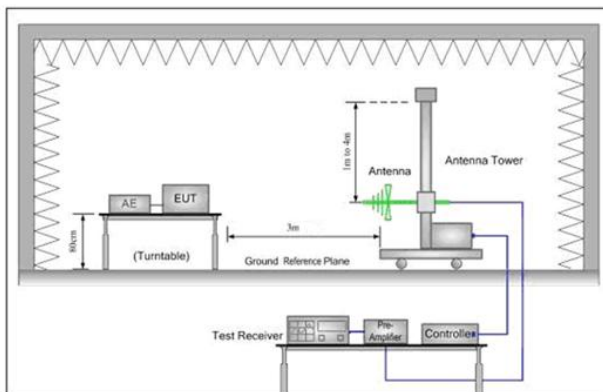


Figure 2. 30MHz to 1GHz

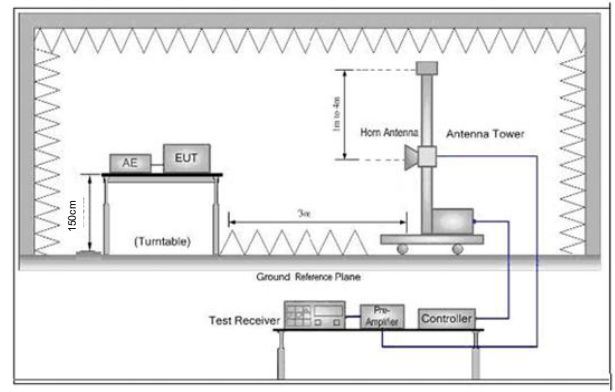


Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both

	horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Refer to clause 5.3
Test Results:	Pass


Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of 1Mbps for 802.11b was recorded in the report.

Adapter A-350FKD-24P-B0:

Horizontal:


Test Graph

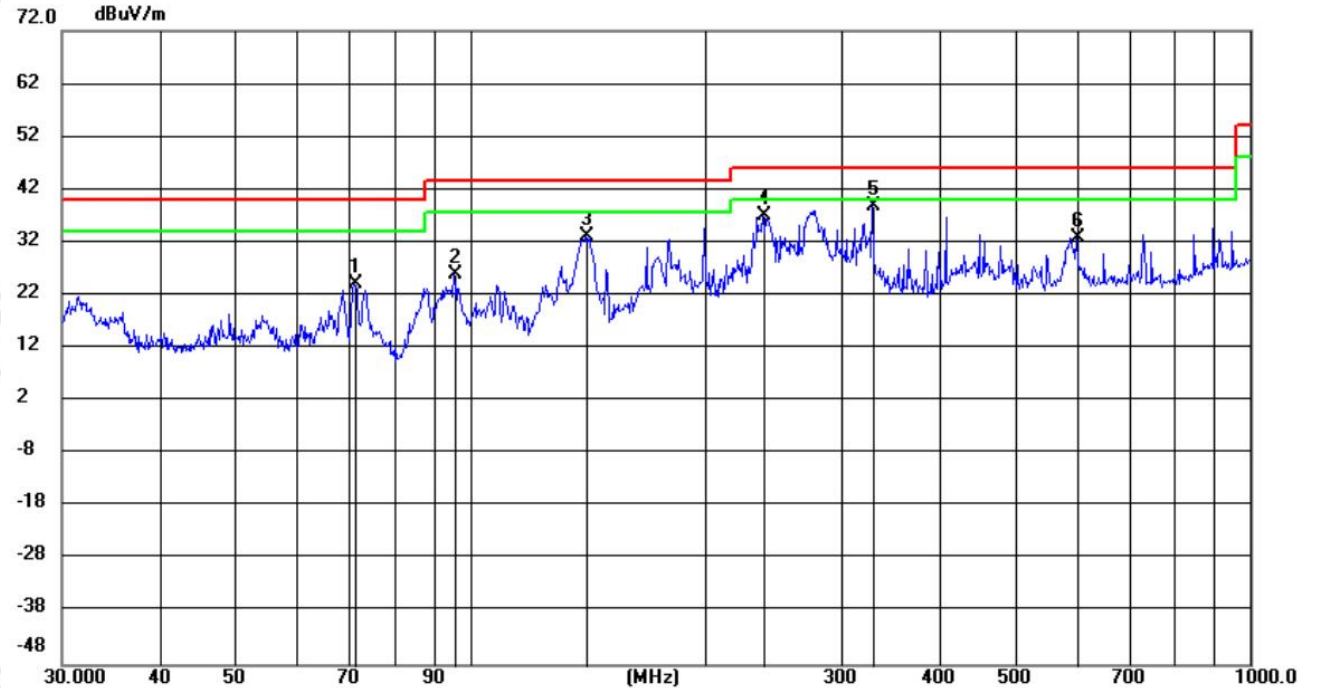

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		71.2425	13.57	10.52	24.09	40.00	-15.91	QP	100	47
2		95.6615	13.39	12.46	25.85	43.50	-17.65	QP	100	153
3		140.9338	22.80	10.45	33.25	43.50	-10.25	QP	100	164
4		237.8927	22.76	14.22	36.98	46.00	-9.02	QP	100	352
5	*	328.0022	21.33	17.43	38.76	46.00	-7.24	QP	100	279
6		600.0571	9.60	23.35	32.95	46.00	-13.05	QP	100	132


Vertical:

Test Graph

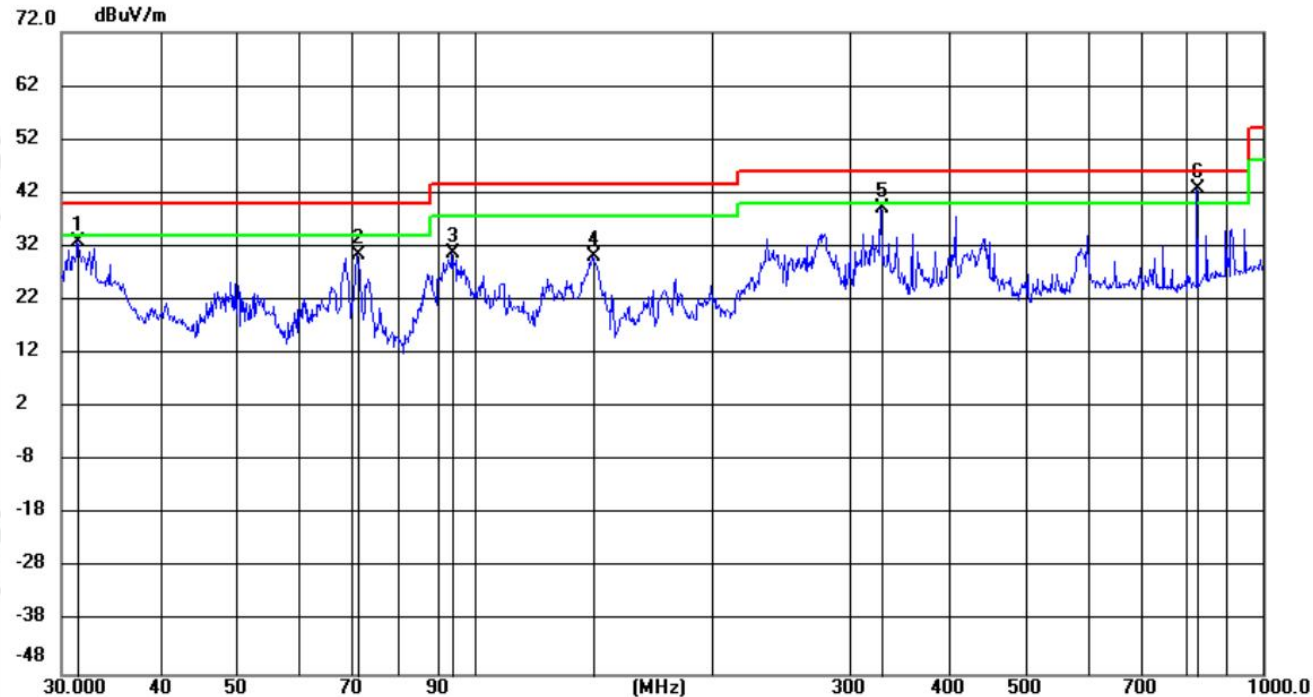

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		31.4433	20.28	12.44	32.72	40.00	-7.28	QP	100	198
2		71.2175	19.96	10.52	30.48	40.00	-9.52	QP	100	166
3		93.8672	18.53	12.14	30.67	43.50	-12.83	QP	100	176
4		141.4785	19.61	10.44	30.05	43.50	-13.45	QP	100	17
5		328.0023	21.64	17.43	39.07	46.00	-6.93	QP	100	314
6	*	825.4648	17.23	25.54	42.77	46.00	-3.23	QP	100	198


Adapter MS-TA460J240-350B0:
Horizontal:
Test Graph

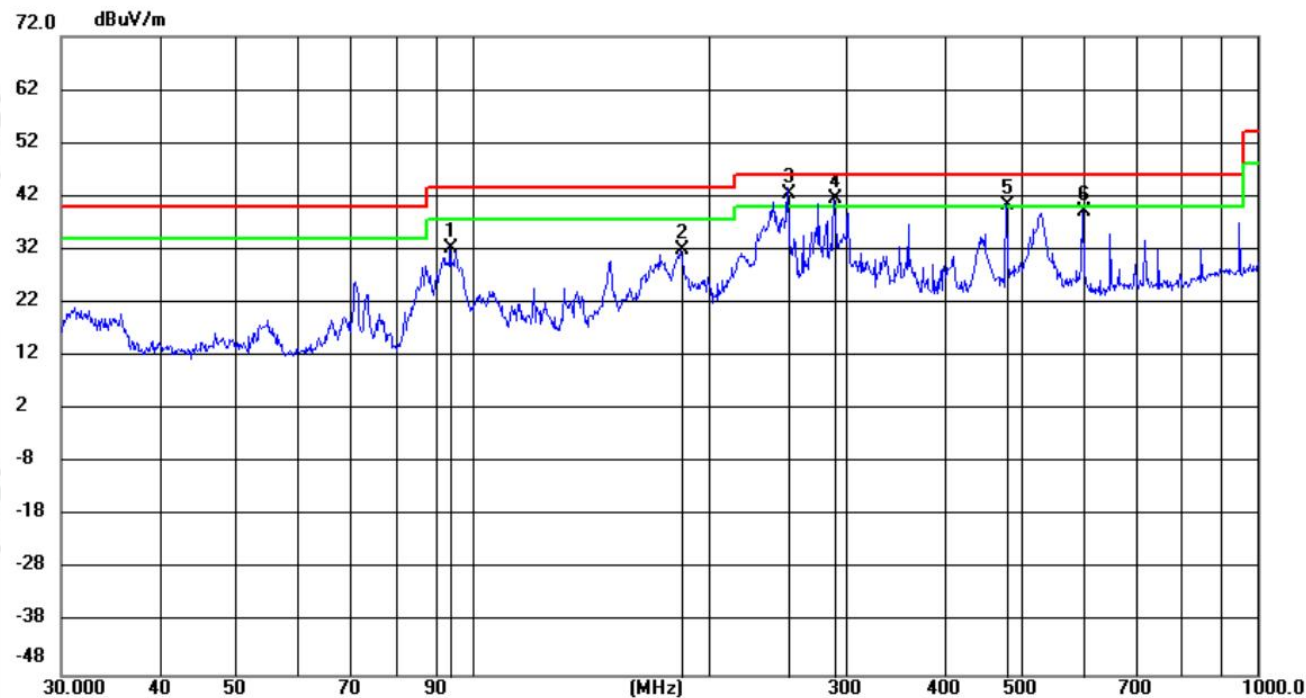

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		93.9659	20.19	12.16	32.35	43.50	-11.15	QP	200	126
2		184.9756	19.91	11.97	31.88	43.50	-11.62	QP	100	131
3	*	252.1953	27.64	14.76	42.40	46.00	-3.60	QP	100	205
4	!	289.1540	25.40	16.17	41.57	46.00	-4.43	QP	100	289
5	!	480.0223	19.93	20.57	40.50	46.00	-5.50	QP	100	110
6		600.0571	15.73	23.35	39.08	46.00	-6.92	QP	100	131

Vertical:

Test Graph

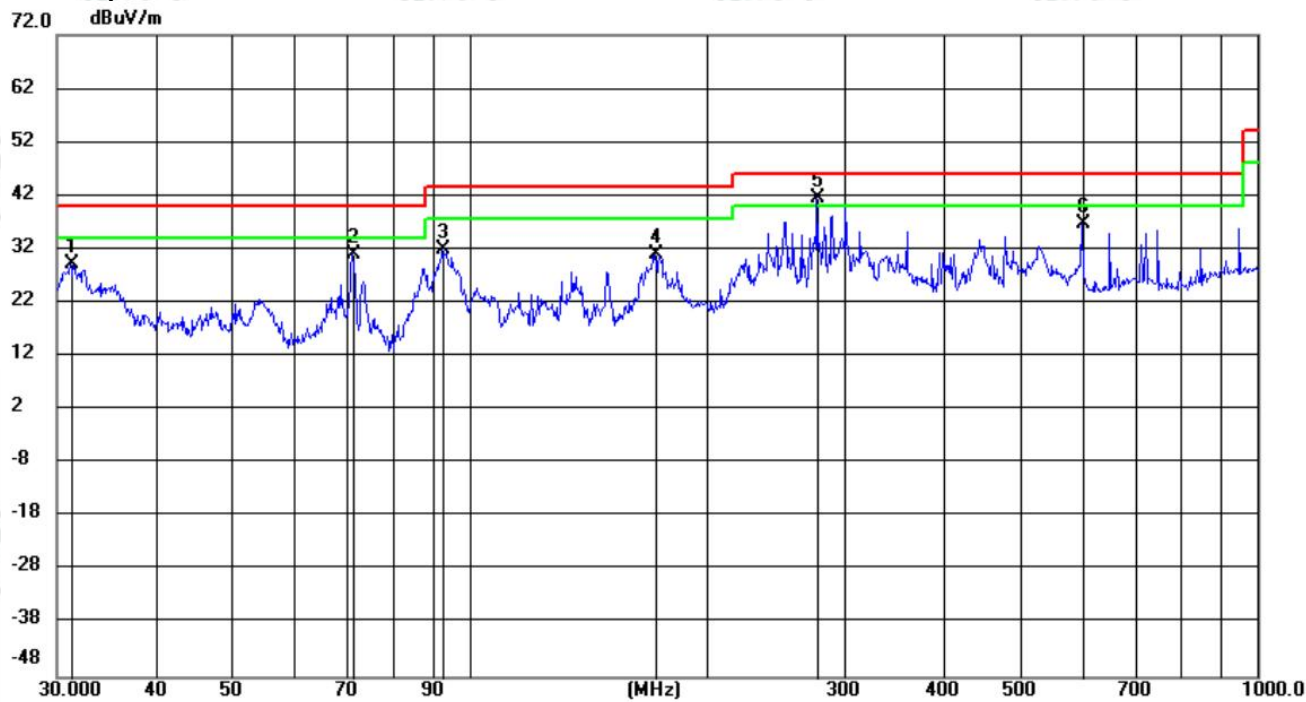


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.2235	16.88	12.42	29.30	40.00	-10.70	QP	100	242
2		71.2175	20.68	10.52	31.20	40.00	-8.80	QP	100	210
3		92.7222	19.98	11.95	31.93	43.50	-11.57	QP	100	7
4		172.4778	19.55	11.36	30.91	43.50	-12.59	QP	200	224
5	*	276.7051	25.75	15.69	41.44	46.00	-4.56	QP	100	103
6		600.0573	13.27	23.35	36.62	46.00	-9.38	QP	200	224

Adapter PMR-24V320W1AT:


Horizontal:

Test Graph

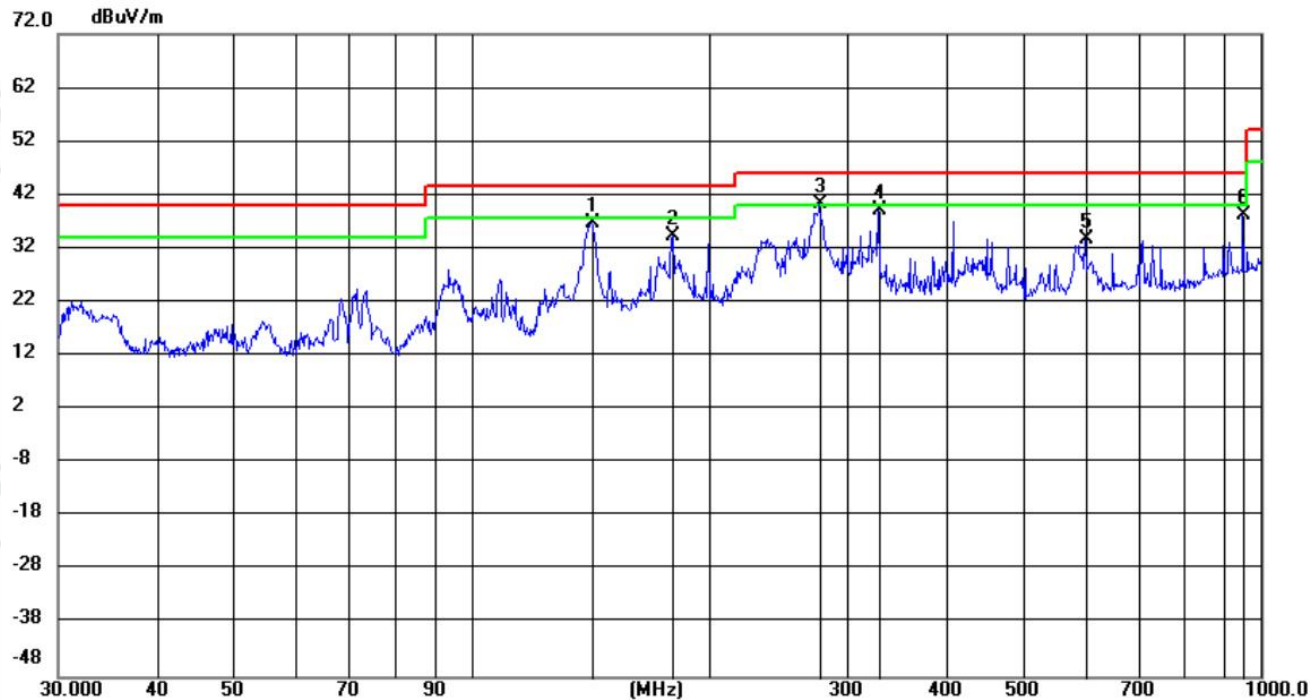

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		141.9008	26.29	10.44	36.73	43.50	-6.77	QP	100	174
2		180.0164	23.22	11.16	34.38	43.50	-9.12	QP	199	241
3	*	276.3172	24.61	15.68	40.29	46.00	-5.71	QP	100	352
4		328.0022	21.80	17.43	39.23	46.00	-6.77	QP	100	268
5		600.0571	10.53	23.35	33.88	46.00	-12.12	QP	100	78
6		950.0926	10.71	27.48	38.19	46.00	-7.81	QP	199	199

Vertical:
Test Graph
72.0 dBuV/m

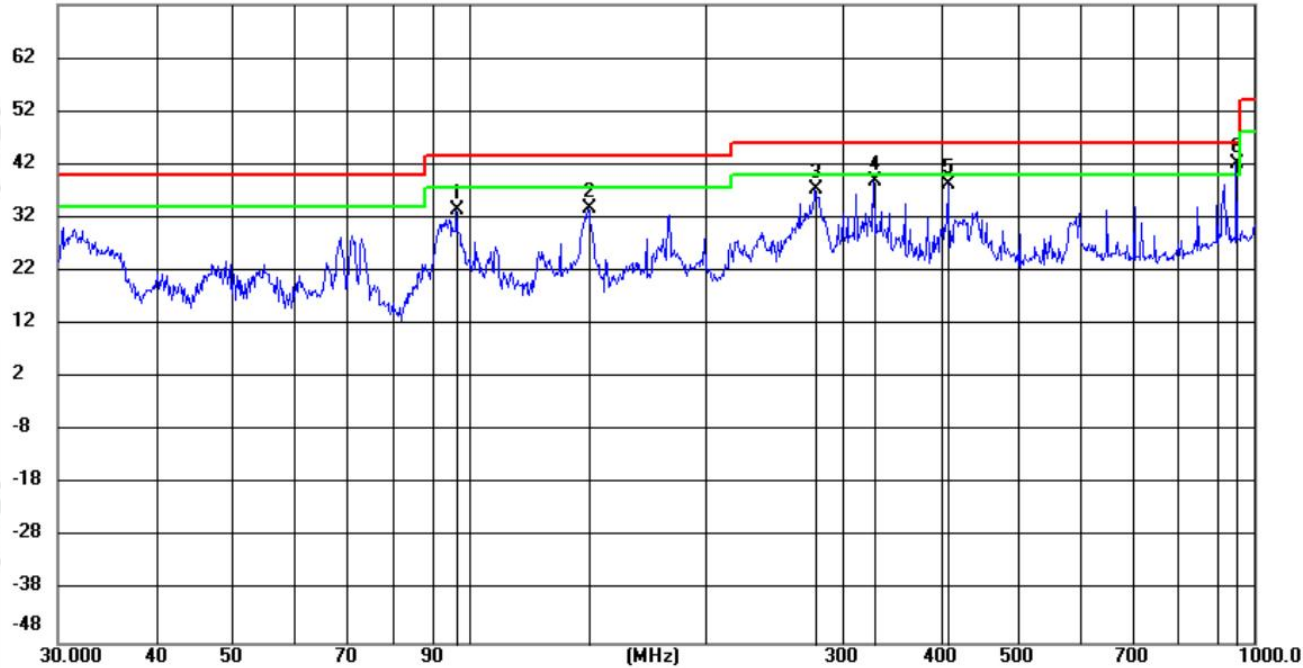

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		96.6054	20.94	12.62	33.56	43.50	-9.94	QP	100	71
2		141.9008	23.40	10.44	33.84	43.50	-9.66	QP	100	113
3		277.0449	21.53	15.71	37.24	46.00	-8.76	QP	100	135
4		328.0023	21.52	17.43	38.95	46.00	-7.05	QP	100	315
5		408.0149	18.66	19.69	38.35	46.00	-7.65	QP	100	113
6	*	950.0927	14.81	27.48	42.29	46.00	-3.71	QP	100	113

Radiated Spurious Emission above 1GHz:

Remark: Through Pre-scan, for 20MHz Occupied Bandwidth, 802.11 b mode was the worst case; for 40MHz Occupied Bandwidth, 802.11 n(HT40) mode was the worst case; only the worst case was recorded in the report.

Adapter PMR-24V320W1AT:

Mode:			802.11 b Transmitting			Channel:		2412MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1250.15	11.63	37.04	48.67	74.00	25.33	PASS	H	PK
2	1840.5894	14.32	36.37	50.69	74.00	23.31	PASS	H	PK
3	3215.8144	-14.35	54.92	40.57	74.00	33.43	PASS	H	PK
4	4619.908	-9.32	50.15	40.83	74.00	33.17	PASS	H	PK
5	6431.5788	-4.30	50.55	46.25	74.00	27.75	PASS	H	PK
6	10704.3136	2.47	43.96	46.43	74.00	27.57	PASS	H	PK
7	1252.2835	11.70	37.52	49.22	74.00	24.78	PASS	V	PK
8	1698.9799	14.08	37.13	51.21	74.00	22.79	PASS	V	PK
9	3299.0199	-14.09	53.55	39.46	74.00	34.54	PASS	V	PK
10	4619.908	-9.32	55.20	45.88	74.00	28.12	PASS	V	PK
11	6432.2288	-4.29	49.04	44.75	74.00	29.25	PASS	V	PK
12	10229.1319	1.79	43.59	45.38	74.00	28.62	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1230.0153	11.51	37.65	49.16	74.00	24.84	PASS	H	PK
2	1588.9726	13.66	36.42	50.08	74.00	23.92	PASS	H	PK
3	3215.8144	-14.35	55.51	41.16	74.00	32.84	PASS	H	PK
4	4619.908	-9.32	51.29	41.97	74.00	32.03	PASS	H	PK
5	6432.2288	-4.29	49.43	45.14	74.00	28.86	PASS	H	PK
6	10325.9884	1.86	44.74	46.60	74.00	27.40	PASS	H	PK
7	1239.616	11.57	37.87	49.44	74.00	24.56	PASS	V	PK
8	1786.0524	14.23	36.89	51.12	74.00	22.88	PASS	V	PK
9	3335.4224	-14.03	53.32	39.29	74.00	34.71	PASS	V	PK
10	4619.908	-9.32	55.38	46.06	74.00	27.94	PASS	V	PK
11	6432.2288	-4.29	48.79	44.50	74.00	29.50	PASS	V	PK
12	9686.9958	1.24	44.23	45.47	74.00	28.53	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2462MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1267.0845	11.91	36.76	48.67	74.00	25.33	PASS	H	PK
2	1678.5786	14.03	37.16	51.19	74.00	22.81	PASS	H	PK
3	3282.7689	-14.10	54.87	40.77	74.00	33.23	PASS	H	PK
4	4967.6812	-8.06	50.03	41.97	74.00	32.03	PASS	H	PK
5	8084.639	-1.05	45.97	44.92	74.00	29.08	PASS	H	PK
6	11278.9519	2.43	44.48	46.91	74.00	27.09	PASS	H	PK
7	1315.4877	12.24	37.44	49.68	74.00	24.32	PASS	V	PK
8	2010.2007	14.70	36.87	51.57	74.00	22.43	PASS	V	PK
9	3420.578	-13.93	54.69	40.76	74.00	33.24	PASS	V	PK
10	5552.0701	-6.28	51.24	44.96	74.00	29.04	PASS	V	PK
11	9239.766	0.54	46.11	46.65	74.00	27.35	PASS	V	PK
12	11799.6366	2.36	44.94	47.30	74.00	26.70	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2422MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1252.6835	11.71	38.03	49.74	74.00	24.26	PASS	H	PK
2	1725.6484	14.19	36.91	51.10	74.00	22.90	PASS	H	PK
3	3229.4653	-14.25	59.71	45.46	74.00	28.54	PASS	H	PK
4	4619.908	-9.32	51.21	41.89	74.00	32.11	PASS	H	PK
5	6458.8806	-4.30	50.23	45.93	74.00	28.07	PASS	H	PK
6	10241.4828	1.90	44.70	46.60	74.00	27.40	PASS	H	PK
7	1315.621	12.24	37.22	49.46	74.00	24.54	PASS	V	PK
8	1710.714	14.13	36.66	50.79	74.00	23.21	PASS	V	PK
9	3229.4653	-14.25	55.35	41.10	74.00	32.90	PASS	V	PK
10	4619.908	-9.32	55.54	46.22	74.00	27.78	PASS	V	PK
11	6458.8806	-4.30	50.71	46.41	74.00	27.59	PASS	V	PK
12	9755.2504	1.29	44.45	45.74	74.00	28.26	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1186.4124	11.51	37.16	48.67	74.00	25.33	PASS	H	PK
2	1741.2494	14.12	37.89	52.01	74.00	21.99	PASS	H	PK
3	3229.4653	-14.25	59.75	45.50	74.00	28.50	PASS	H	PK
4	4619.908	-9.32	50.65	41.33	74.00	32.67	PASS	H	PK
5	6458.8806	-4.30	50.91	46.61	74.00	27.39	PASS	H	PK
6	9604.4403	1.39	44.65	46.04	74.00	27.96	PASS	H	PK
7	1297.3532	12.06	36.88	48.94	74.00	25.06	PASS	V	PK
8	1971.3981	14.62	36.66	51.28	74.00	22.72	PASS	V	PK
9	3229.4653	-14.25	54.90	40.65	74.00	33.35	PASS	V	PK
10	4619.908	-9.32	54.85	45.53	74.00	28.47	PASS	V	PK
11	6458.8806	-4.30	48.87	44.57	74.00	29.43	PASS	V	PK
12	10015.2677	1.61	44.22	45.83	74.00	28.17	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1204.0136	11.65	37.06	48.71	74.00	25.29	PASS	H	PK
2	1777.3852	14.31	36.93	51.24	74.00	22.76	PASS	H	PK
3	3269.1179	-14.10	59.72	45.62	74.00	28.38	PASS	H	PK
4	4619.908	-9.32	51.12	41.80	74.00	32.20	PASS	H	PK
5	6538.8359	-4.06	49.84	45.78	74.00	28.22	PASS	H	PK
6	9308.6706	0.84	45.61	46.45	74.00	27.55	PASS	H	PK
7	1297.7532	12.07	36.88	48.95	74.00	25.05	PASS	V	PK
8	1800.4534	14.20	37.02	51.22	74.00	22.78	PASS	V	PK
9	3336.0724	-14.03	54.20	40.17	74.00	33.83	PASS	V	PK
10	4619.908	-9.32	54.93	45.61	74.00	28.39	PASS	V	PK
11	6538.8359	-4.06	48.50	44.44	74.00	29.56	PASS	V	PK
12	9786.4524	1.13	44.86	45.99	74.00	28.01	PASS	V	PK

Adapter MS-TA460J240-350B0:

Mode:			802.11 b Transmitting			Channel:		2412MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1204.8137	11.65	37.68	49.33	74.00	24.67	PASS	H	PK
2	1825.9217	14.37	36.34	50.71	74.00	23.29	PASS	H	PK
3	3215.8144	-14.35	54.12	39.77	74.00	34.23	PASS	H	PK
4	4619.908	-9.32	50.98	41.66	74.00	32.34	PASS	H	PK
5	6432.2288	-4.29	50.32	46.03	74.00	27.97	PASS	H	PK
6	10252.5335	1.98	44.79	46.77	74.00	27.23	PASS	H	PK
7	1241.4828	11.57	38.05	49.62	74.00	24.38	PASS	V	PK
8	1775.9184	14.33	36.27	50.60	74.00	23.40	PASS	V	PK
9	3192.4128	-14.49	53.93	39.44	74.00	34.56	PASS	V	PK
10	4620.558	-9.31	53.56	44.25	74.00	29.75	PASS	V	PK
11	6431.5788	-4.30	48.86	44.56	74.00	29.44	PASS	V	PK
12	9256.0171	0.65	44.93	45.58	74.00	28.42	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1206.2804	11.64	37.50	49.14	74.00	24.86	PASS	H	PK
2	1799.6533	14.20	36.87	51.07	74.00	22.93	PASS	H	PK
3	3215.8144	-14.35	54.94	40.59	74.00	33.41	PASS	H	PK
4	4619.908	-9.32	51.31	41.99	74.00	32.01	PASS	H	PK
5	6432.2288	-4.29	50.08	45.79	74.00	28.21	PASS	H	PK
6	9740.9494	1.30	43.95	45.25	74.00	28.75	PASS	H	PK
7	1193.4796	11.58	37.13	48.71	74.00	25.29	PASS	V	PK
8	1847.3898	14.42	36.56	50.98	74.00	23.02	PASS	V	PK
9	3323.7216	-14.06	53.79	39.73	74.00	34.27	PASS	V	PK
10	4619.908	-9.32	54.57	45.25	74.00	28.75	PASS	V	PK
11	7325.3884	-2.87	47.12	44.25	74.00	29.75	PASS	V	PK
12	10762.1675	2.21	44.49	46.70	74.00	27.30	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2462MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1359.2239	12.61	37.71	50.32	74.00	23.68	PASS	H	PK
2	1981.3988	14.52	36.73	51.25	74.00	22.75	PASS	H	PK
3	3358.8239	-14.00	54.27	40.27	74.00	33.73	PASS	H	PK
4	4619.908	-9.32	50.72	41.40	74.00	32.60	PASS	H	PK
5	6565.4877	-3.93	51.59	47.66	74.00	26.34	PASS	H	PK
6	9800.7534	1.06	44.69	45.75	74.00	28.25	PASS	H	PK
7	1330.2887	12.26	36.36	48.62	74.00	25.38	PASS	V	PK
8	1752.4502	14.10	37.14	51.24	74.00	22.76	PASS	V	PK
9	3355.5737	-14.00	53.70	39.70	74.00	34.30	PASS	V	PK
10	4619.908	-9.32	55.06	45.74	74.00	28.26	PASS	V	PK
11	6565.4877	-3.93	51.00	47.07	74.00	26.93	PASS	V	PK
12	10288.9359	1.91	45.20	47.11	74.00	26.89	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2422MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1080.4054	11.26	37.23	48.49	74.00	25.51	PASS	H	PK
2	1704.847	14.09	36.37	50.46	74.00	23.54	PASS	H	PK
3	3229.4653	-14.25	60.77	46.52	74.00	27.48	PASS	H	PK
4	4619.908	-9.32	50.79	41.47	74.00	32.53	PASS	H	PK
5	6458.2305	-4.29	51.05	46.76	74.00	27.24	PASS	H	PK
6	11674.1783	2.53	45.13	47.66	74.00	26.34	PASS	H	PK
7	1056.8038	11.12	37.66	48.78	74.00	25.22	PASS	V	PK
8	1519.2346	13.30	36.40	49.70	74.00	24.30	PASS	V	PK
9	3229.4653	-14.25	53.66	39.41	74.00	34.59	PASS	V	PK
10	4619.908	-9.32	54.32	45.00	74.00	29.00	PASS	V	PK
11	6458.2305	-4.29	49.50	45.21	74.00	28.79	PASS	V	PK
12	11387.5092	2.38	43.75	46.13	74.00	27.87	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1095.073	11.31	37.06	48.37	74.00	25.63	PASS	H	PK
2	1602.4402	13.74	35.72	49.46	74.00	24.54	PASS	H	PK
3	3248.9666	-14.12	60.07	45.95	74.00	28.05	PASS	H	PK
4	4619.908	-9.32	50.84	41.52	74.00	32.48	PASS	H	PK
5	6498.5332	-4.50	50.53	46.03	74.00	27.97	PASS	H	PK
6	10442.3462	2.18	43.20	45.38	74.00	28.62	PASS	H	PK
7	1019.2013	11.01	37.67	48.68	74.00	25.32	PASS	V	PK
8	1606.8405	13.73	36.28	50.01	74.00	23.99	PASS	V	PK
9	3249.6166	-14.11	54.59	40.48	74.00	33.52	PASS	V	PK
10	4619.908	-9.32	54.72	45.40	74.00	28.60	PASS	V	PK
11	6498.5332	-4.50	48.74	44.24	74.00	29.76	PASS	V	PK
12	9665.5444	1.22	45.24	46.46	74.00	27.54	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1050.8034	11.20	36.90	48.10	74.00	25.90	PASS	H	PK
2	1606.5738	13.73	36.34	50.07	74.00	23.93	PASS	H	PK
3	3269.1179	-14.10	60.81	46.71	74.00	27.29	PASS	H	PK
4	4725.8651	-8.74	50.57	41.83	74.00	32.17	PASS	H	PK
5	6538.8359	-4.06	51.39	47.33	74.00	26.67	PASS	H	PK
6	10208.9806	1.60	45.29	46.89	74.00	27.11	PASS	H	PK
7	1097.8732	11.30	38.22	49.52	74.00	24.48	PASS	V	PK
8	1663.6442	13.84	36.66	50.50	74.00	23.50	PASS	V	PK
9	3308.7706	-14.07	53.93	39.86	74.00	34.14	PASS	V	PK
10	4619.908	-9.32	54.91	45.59	74.00	28.41	PASS	V	PK
11	6538.8359	-4.06	48.43	44.37	74.00	29.63	PASS	V	PK
12	9066.8545	0.17	44.91	45.08	74.00	28.92	PASS	V	PK

Adapter A-350FKD-24P-B0:

Mode:			802.11 b Transmitting			Channel:		2412MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1332.5555	12.31	36.24	48.55	74.00	25.45	PASS	H	PK
2	1856.1904	14.48	35.69	50.17	74.00	23.83	PASS	H	PK
3	3490.7827	-13.89	53.37	39.48	74.00	34.52	PASS	H	PK
4	5860.8407	-5.47	47.86	42.39	74.00	31.61	PASS	H	PK
5	8426.5618	-0.68	45.76	45.08	74.00	28.92	PASS	H	PK
6	10810.2707	1.88	44.22	46.10	74.00	27.90	PASS	H	PK
7	1182.2788	11.48	37.02	48.50	74.00	25.50	PASS	V	PK
8	1771.3848	14.38	36.94	51.32	74.00	22.68	PASS	V	PK
9	3167.0611	-14.56	53.07	38.51	74.00	35.49	PASS	V	PK
10	4530.202	-9.61	49.87	40.26	74.00	33.74	PASS	V	PK
11	6679.2453	-3.61	46.02	42.41	74.00	31.59	PASS	V	PK
12	9140.3094	0.09	46.51	46.60	74.00	27.40	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1244.4163	11.59	37.87	49.46	74.00	24.54	PASS	H	PK
2	1781.5188	14.27	36.60	50.87	74.00	23.13	PASS	H	PK
3	3189.1626	-14.49	54.41	39.92	74.00	34.08	PASS	H	PK
4	4478.8486	-9.77	49.87	40.10	74.00	33.90	PASS	H	PK
5	6300.27	-4.84	47.31	42.47	74.00	31.53	PASS	H	PK
6	9215.0643	0.35	46.16	46.51	74.00	27.49	PASS	H	PK
7	1409.7607	12.92	36.95	49.87	74.00	24.13	PASS	V	PK
8	1909.2606	14.80	36.33	51.13	74.00	22.87	PASS	V	PK
9	3713.0975	-12.80	53.01	40.21	74.00	33.79	PASS	V	PK
10	5765.9344	-5.85	47.71	41.86	74.00	32.14	PASS	V	PK
11	8332.9555	-1.08	46.18	45.10	74.00	28.90	PASS	V	PK
12	10702.3635	2.48	42.96	45.44	74.00	28.56	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2462MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1269.0846	11.91	35.83	47.74	74.00	26.26	PASS	H	PK
2	2052.6035	14.78	36.65	51.43	74.00	22.57	PASS	H	PK
3	3413.4276	-13.94	53.08	39.14	74.00	34.86	PASS	H	PK
4	5275.8017	-7.26	48.62	41.36	74.00	32.64	PASS	H	PK
5	7230.482	-3.15	47.12	43.97	74.00	30.03	PASS	H	PK
6	10259.0339	1.97	44.69	46.66	74.00	27.34	PASS	H	PK
7	1186.4124	11.51	37.21	48.72	74.00	25.28	PASS	V	PK
8	1784.1856	14.25	36.92	51.17	74.00	22.83	PASS	V	PK
9	3326.3218	-14.04	53.09	39.05	74.00	34.95	PASS	V	PK
10	5143.8429	-7.39	48.52	41.13	74.00	32.87	PASS	V	PK
11	7469.0479	-2.31	46.66	44.35	74.00	29.65	PASS	V	PK
12	10701.7134	2.48	43.58	46.06	74.00	27.94	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2422MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1270.018	11.91	37.33	49.24	74.00	24.76	PASS	H	PK
2	2063.0042	14.73	36.03	50.76	74.00	23.24	PASS	H	PK
3	3321.7715	-14.06	53.14	39.08	74.00	34.92	PASS	H	PK
4	4673.2115	-9.04	49.86	40.82	74.00	33.18	PASS	H	PK
5	6948.3632	-2.89	46.28	43.39	74.00	30.61	PASS	H	PK
6	11037.1358	2.10	44.43	46.53	74.00	27.47	PASS	H	PK
7	1289.6193	11.99	36.54	48.53	74.00	25.47	PASS	V	PK
8	1873.6582	14.49	36.40	50.89	74.00	23.11	PASS	V	PK
9	3497.9332	-13.90	53.07	39.17	74.00	34.83	PASS	V	PK
10	4947.5298	-8.03	49.46	41.43	74.00	32.57	PASS	V	PK
11	7144.6763	-3.16	46.51	43.35	74.00	30.65	PASS	V	PK
12	10700.4134	2.49	42.89	45.38	74.00	28.62	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1332.6888	12.32	37.39	49.71	74.00	24.29	PASS	H	PK
2	1723.6482	14.20	36.08	50.28	74.00	23.72	PASS	H	PK
3	3433.5789	-13.90	53.12	39.22	74.00	34.78	PASS	H	PK
4	5125.6417	-7.47	49.19	41.72	74.00	32.28	PASS	H	PK
5	7269.4846	-2.93	46.41	43.48	74.00	30.52	PASS	H	PK
6	9965.8644	1.47	43.46	44.93	74.00	29.07	PASS	H	PK
7	1417.2278	12.87	37.03	49.90	74.00	24.10	PASS	V	PK
8	1818.5879	14.37	36.60	50.97	74.00	23.03	PASS	V	PK
9	3547.3365	-13.79	52.42	38.63	74.00	35.37	PASS	V	PK
10	5683.3789	-6.15	48.30	42.15	74.00	31.85	PASS	V	PK
11	7357.2405	-2.91	46.66	43.75	74.00	30.25	PASS	V	PK
12	9138.3592	0.09	45.08	45.17	74.00	28.83	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1373.7583	12.73	37.16	49.89	74.00	24.11	PASS	H	PK
2	1914.9943	14.78	36.09	50.87	74.00	23.13	PASS	H	PK
3	3361.4241	-14.00	52.45	38.45	74.00	35.55	PASS	H	PK
4	4653.0602	-9.17	49.25	40.08	74.00	33.92	PASS	H	PK
5	6555.737	-3.93	46.35	42.42	74.00	31.58	PASS	H	PK
6	9090.256	0.16	45.87	46.03	74.00	27.97	PASS	H	PK
7	1358.9573	12.61	36.69	49.30	74.00	24.70	PASS	V	PK
8	1919.2613	14.75	36.20	50.95	74.00	23.05	PASS	V	PK
9	3104.0069	-14.72	53.60	38.88	74.00	35.12	PASS	V	PK
10	4879.9253	-8.36	49.15	40.79	74.00	33.21	PASS	V	PK
11	7207.7305	-3.34	46.84	43.50	74.00	30.50	PASS	V	PK
12	10801.8201	1.89	44.03	45.92	74.00	28.08	PASS	V	PK


Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Restricted bands:
Test plot as follows:

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark	Adapter: PMR-24V320W1AT		


Test Graph

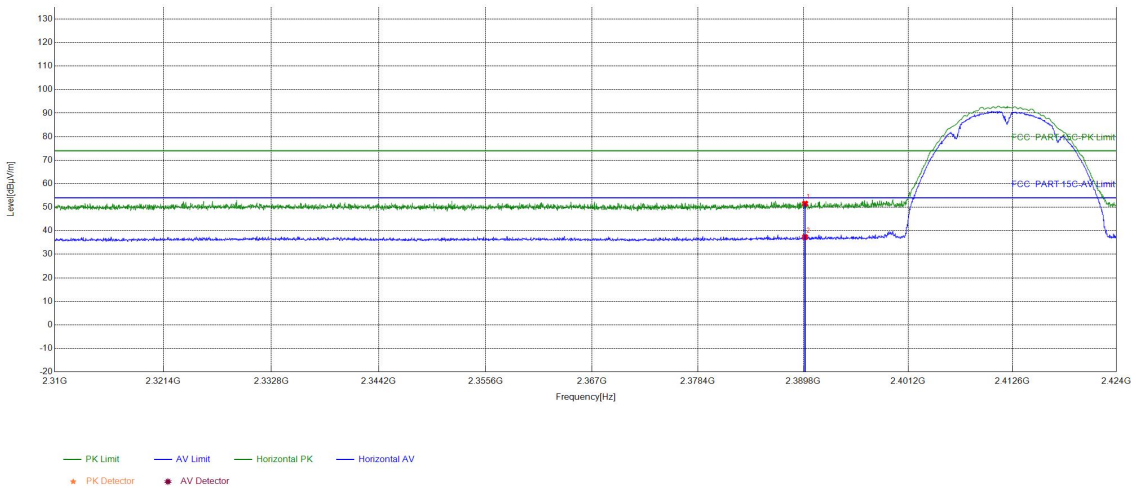

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.60	51.56	74.00	22.44	PASS	Horizontal	PK
2	2390	15.96	21.36	37.32	54.00	16.68	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark	Adapter: PMR-24V320W1AT		


Test Graph

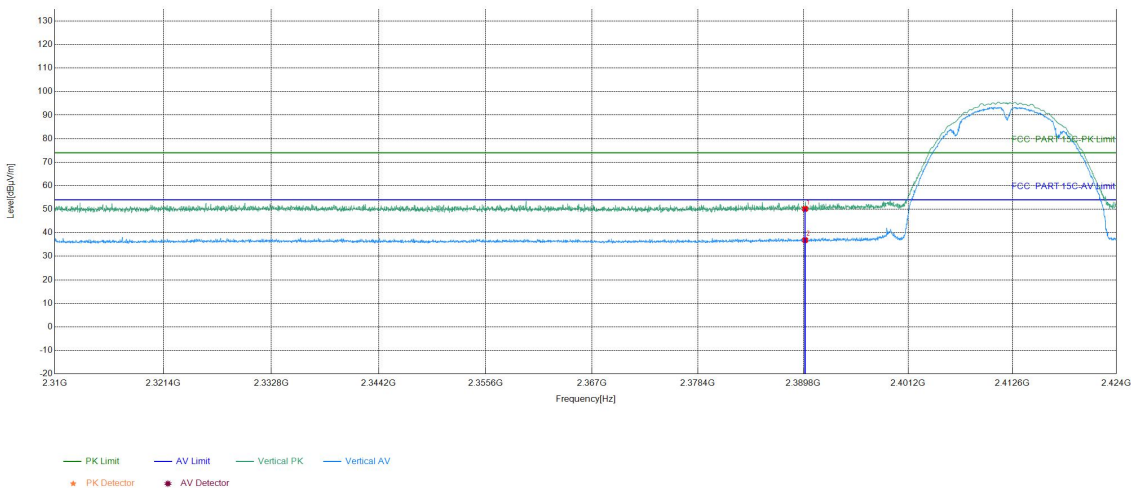

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.17	50.13	74.00	23.87	PASS	Vertical	PK
2	2390	15.96	20.90	36.86	54.00	17.14	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark	Adapter: PMR-24V320W1AT		


Test Graph

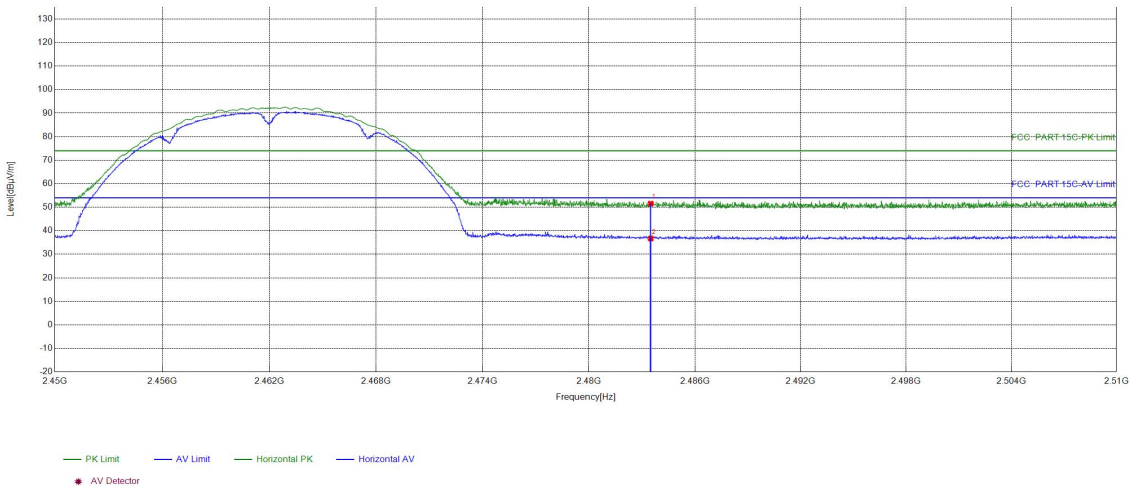

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.24	51.53	74.00	22.47	PASS	Horizontal	PK
2	2483.5	16.29	20.41	36.70	54.00	17.30	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark	Adapter: PMR-24V320W1AT		


Test Graph

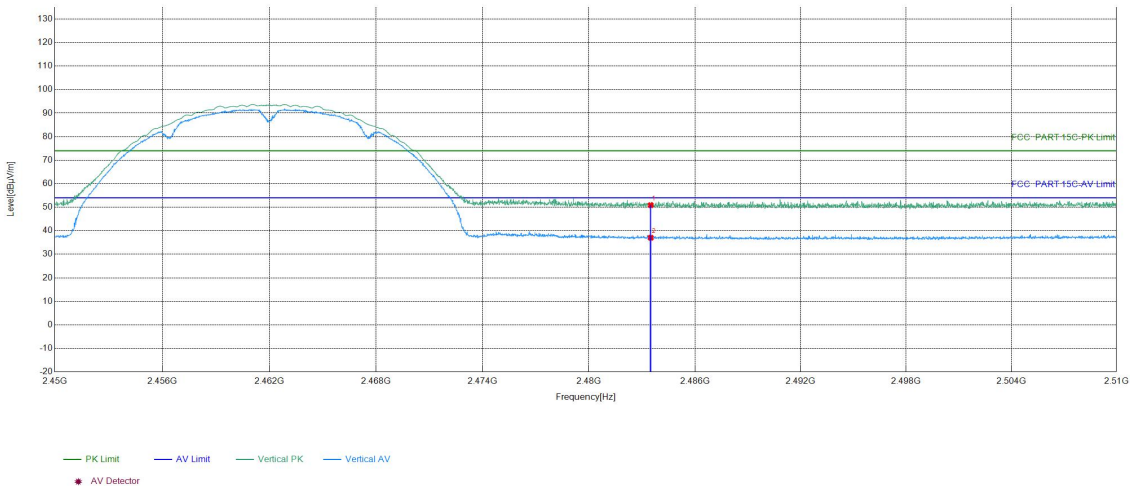

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.58	50.87	74.00	23.13	PASS	Vertical	PK
2	2483.5	16.29	20.75	37.04	54.00	16.96	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark	Adapter: PMR-24V320W1AT		


Test Graph

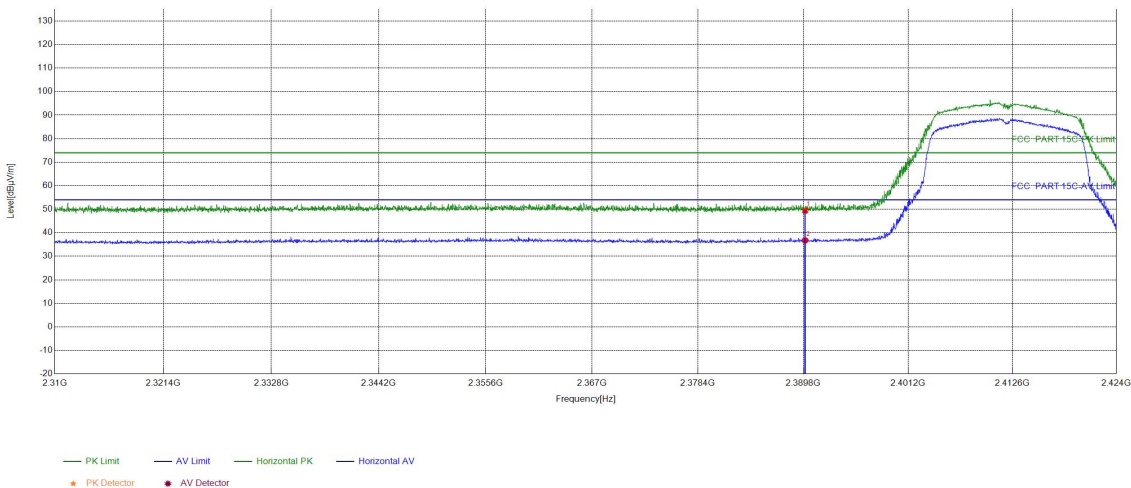

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	33.39	49.35	74.00	24.65	PASS	Horizontal	PK
2	2390	15.96	20.81	36.77	54.00	17.23	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark	Adapter: PMR-24V320W1AT		


Test Graph

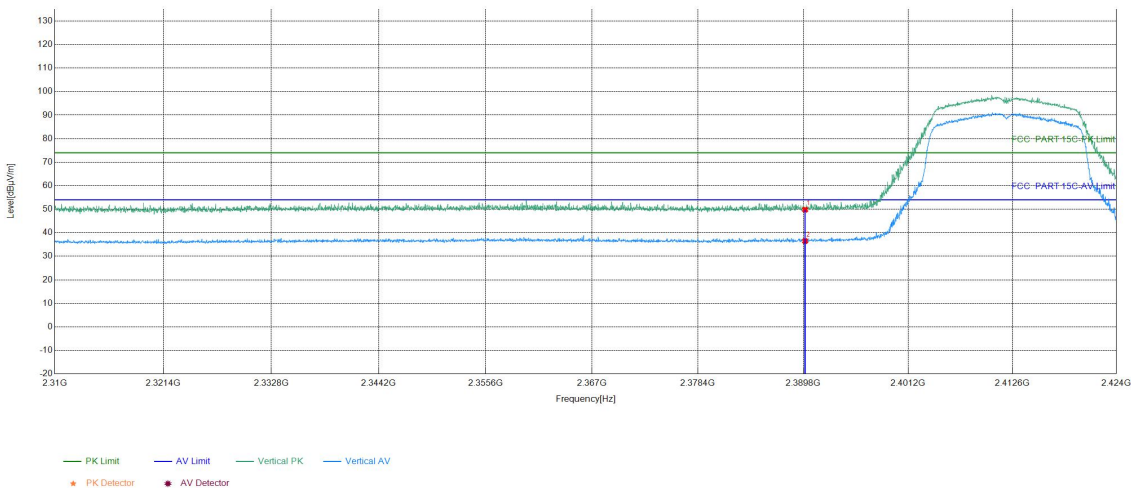

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	33.85	49.81	74.00	24.19	PASS	Vertical	PK
2	2390	15.96	20.53	36.49	54.00	17.51	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark	Adapter: PMR-24V320W1AT		


Test Graph

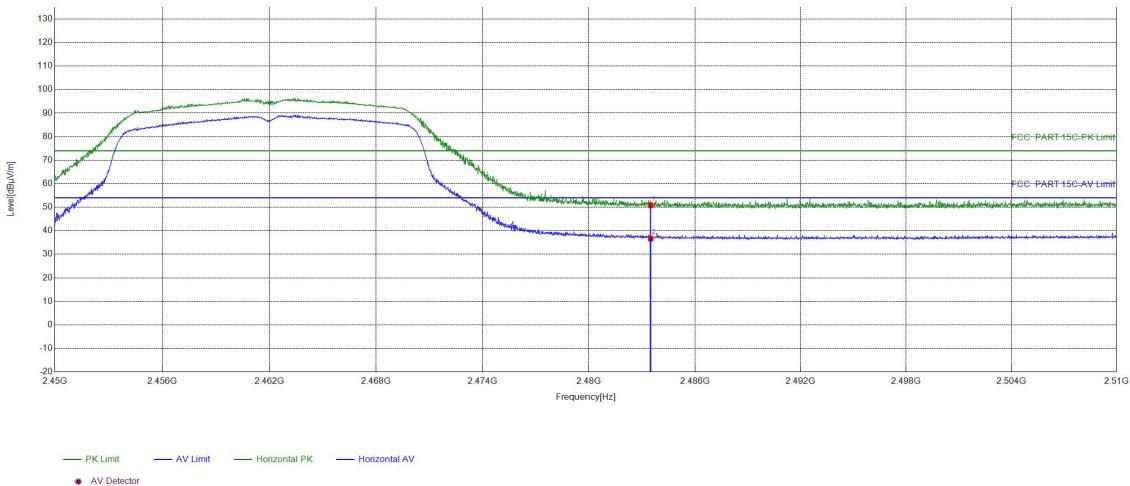

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.54	50.83	74.00	23.17	PASS	Horizontal	PK
2	2483.5	16.29	20.34	36.63	54.00	17.37	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark	Adapter: PMR-24V320W1AT		

Test Graph

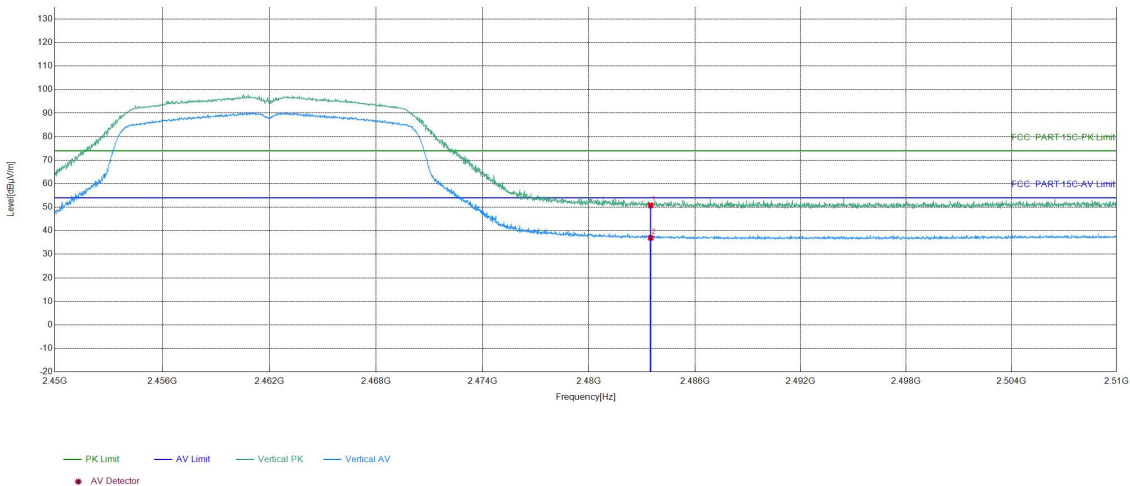

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.47	50.76	74.00	23.24	PASS	Vertical	PK
2	2483.5	16.29	20.70	36.99	54.00	17.01	PASS	Vertical	AV