

FCC TEST REPORT

FCC ID:2A6K3-ZMLE3030

Report Number..... : ZKT-221226L9673-03

Date of Test..... : Dec. 15, 2022 -- Dec. 30, 2022

Date of issue : Dec. 30, 2022

Total number of pages : 87

Test Result : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Jiangsu Jinshi Legend Technology Co., Ltd

Address : Room 105-7, Building 17, Phase I, Human Resources Service Industrial Park, Jiangbei New District, Nanjing, No. 1, Qiliqiao North Road, Jiangbei New District, Nanjing, Jiangsu province, China

Manufacturer's name : Jiangsu Jinshi Legend Technology Co., Ltd

Address : Room 105-7, Building 17, Phase I, Human Resources Service Industrial Park, Jiangbei New District, Nanjing, No. 1, Qiliqiao North Road, Jiangbei New District, Nanjing, Jiangsu province, China

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... : KDB558074 D0115.247 Meas Guidance v 05r02

Non-standard test method : N/A

Test Report Form No. : TRF-EL-110_V0

Test Report Form(s) Originator : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Projector

Trademark : 知麻 ZEEMR

Model/Type reference : ZMLE3030, ZMLE3031, ZMLE3032, ZMLE3033, ZMLE3034, ZMLE3035, ZMLE3036, ZMLE3037, ZMLE3038, ZMLE3039


Ratings..... : DC 19V/6.3A from adapter

Testing procedure and testing location:


Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

**Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China**

Tested by (name + signature).....: Alen He



Reviewer (name + signature).....: Joe Liu



Approved (name + signature).....: Lake Xie



Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	9
4. EMC EMISSION TEST	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
4.1.2 TEST PROCEDURE	11
4.1.3 DEVIATION FROM TEST STANDARD	11
4.1.4 TEST SETUP	11
4.1.5 EUT OPERATING CONDITIONS	11
4.1.6 TEST RESULT	12
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	14
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	15
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS	16
5.RADIATED BAND EMISSIONMEASUREMENT	29
5.1 TEST REQUIREMENT:	29
5.2 TEST PROCEDURE	29
5.3 DEVIATION FROM TEST STANDARD	29
5.4 TEST SETUP	30
5.5 EUT OPERATING CONDITIONS	30
5.6 TEST RESULT	31
6.POWER SPECTRAL DENSITY TEST	36
6.1 APPLIED PROCEDURES / LIMIT	36
6.2 TEST PROCEDURE	36
6.3 DEVIATION FROM STANDARD	36
6.4 TEST SETUP	36
6.5 EUT OPERATION CONDITIONS	36
6.6 TEST RESULT	36

7. CHANNEL BANDWIDTH	37
7.1 APPLIED PROCEDURES / LIMIT	37
7.2 TEST PROCEDURE	37
7.3 DEVIATION FROM STANDARD	37
7.4 TEST SETUP	37
7.5 EUT OPERATION CONDITIONS	37
7.6 TEST RESULT	37
8. OUTPUT POWER TEST	38
8.1 APPLIED PROCEDURES/LIMIT	38
8.2 TEST PROCEDURE	38
8.3 DEVIATION FROM STANDARD	38
8.4 TEST SETUP	38
8.5 EUT OPERATION CONDITIONS	38
8.6 TEST RESULT	38
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	39
9.1 APPLICABLE STANDARD	39
9.2 TEST PROCEDURE	39
9.3 DEVIATION FROM STANDARD	39
9.4 TEST SETUP	39
9.5 EUT OPERATION CONDITIONS	39
9.6 TEST RESULTS	39
10. ANTENNA REQUIREMENT	40
11. APPENDIX1	41
11.1. -6DB BANDWIDTH	41
11.2. BANEDGE	50
11.3. MAX. OUTPUT POWER	61
11.4. POWER SPECTRAL DENSITY	62
11.5. SPURIOUS EMISSION	71
12. TEST SETUP PHOTO	87
13. EUT CONSTRUCTIONAL DETAILS	87

1. VERSION

Report No.	Version	Description	Approved
ZKT-221226L9673-03	Rev.01	Initial issue of report	Dec. 30, 2022

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033


2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

3. GENERAL INFORMATION**3.1 GENERAL DESCRIPTION OF EUT**

Product Name:	Projector
Model No.:	ZMLE3030
Model List:	ZMLE3031, ZMLE3032, ZMLE3033, ZMLE3034, ZMLE3035, ZMLE3036, ZMLE3037, ZMLE3038, ZMLE3039
Model difference:	The BOM and pcb used in these models have the same design and layout, and the appearance color of the products may be a little different (such as black, gray and white, etc.), or the models may be different because of different customer requirements, but these differences will not affect the EMC and wireless performance of the products themselves, so the test model is ZMLE3030
Hardware Version:	V2.0
Software Version:	N/A
Sample(s) Status:	Engineer sample
Frequency range:	802.11b/802.11g /802.11n(HT20): 2412MHz -2462MHz 802.11n(HT40): 2422MHz -2452MHz
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	FPC antenna
Antenna gain:	WIFI ANT1: 3.64dBi; WIFI ANT2: 3.64dBi; MIMO: 6.65dBi
Power supply:	DC 19V/6.3A from adapter

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g /802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

Test channel	Frequency (MHz)
	802.11n(HT40)
Lowest channel	2422MHz
Middle channel	2437MHz
Highest channel	2452MHz


Worst Case Configuration

Description	MIMO (802.11N-HT20)
Antenna	MIMO
Channel	1
Data Rate (Mbps)	MCS7

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle is 100%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	11Mbps	54Mbps	MCS7	MCS7

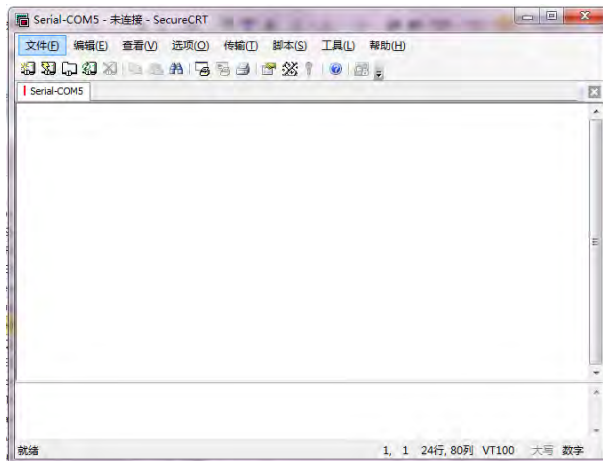
Test Software	Test Tool 
Power level setup	<10dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	adapter	Dongguan AOYUAN Electronics Technology Co.,Ltd.	AY120EA-ZF190632M	/	SDOC
2	remote control	/	/	/	SDOC

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 18, 2022	Oct. 17, 2023
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 17, 2022	Oct. 16, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 18, 2022	Oct. 17, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 17, 2022	Oct. 16, 2023
5	Horn Antenna	Agilent	AH-118	071145	Oct. 17, 2022	Oct. 16, 2023

	(1GHz-18GHz)					
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 17, 2022	Oct. 16, 2023
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Oct. 17, 2022	Oct. 16, 2023
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 18, 2022	Oct. 17, 2023
9	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Oct. 18, 2022	Oct. 17, 2023
10	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
11	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 18, 2022	Oct. 17, 2023
13	Signal Generator	Agilent	N5182A	N/A	Oct. 22, 2022	Oct. 21, 2023
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 17, 2022	Oct. 16, 2023
15	MWRF Power Meter Test system	MW	MW100-RPC B	N/A	Oct. 22, 2022	Oct. 21, 2023
16	Power sensor	KEYSIGHT	U200H	MY51190005	Oct. 22, 2022	Oct. 21, 2023
17	D.C. Power Supply	LongWei	TPR-6405D	N/A	Oct. 22, 2022	Oct. 21, 2023
18	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
19	RF Software	MW	MTS8310	V2.0.0.0	\	\
20	Turntable	MF	MF-7802BS	N/A	\	\
21	Antenna tower	MF	MF-7802BS	N/A	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 22, 2022	Oct. 21, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 22, 2022	Oct. 21, 2023
3	Test Cable	N/A	C01	N/A	Oct. 18, 2022	Oct. 17, 2023
4	Test Cable	N/A	C02	N/A	Oct. 18, 2022	Oct. 17, 2023
5	EMI Test Receiver	R&S	ESC13	101393	Oct. 17, 2022	Oct. 16, 2023
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.e.
8. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

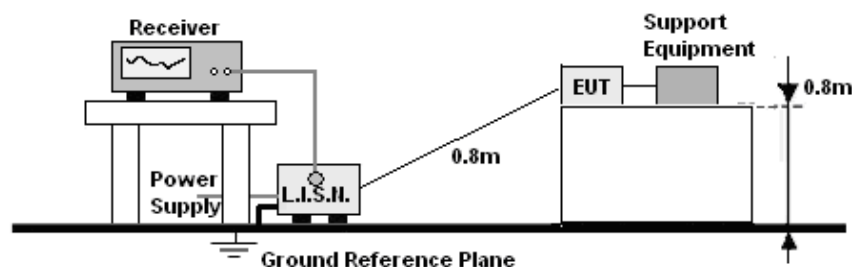


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULT

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase:	L
Test Voltage:	AC 120V/60Hz		

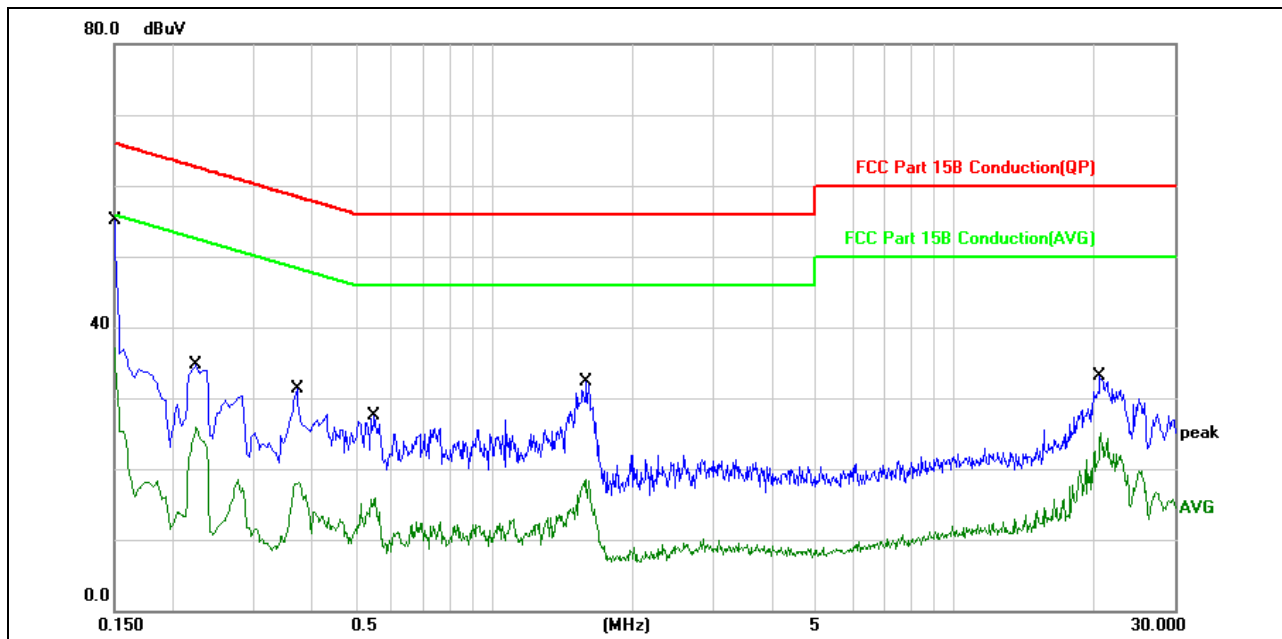


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1499	45.39	9.75	55.14	66.00	-10.86	QP	
2		0.1499	27.34	9.75	37.09	56.00	-18.91	AVG	
3		0.2260	24.96	9.76	34.72	62.59	-27.87	QP	
4		0.2260	16.18	9.76	25.94	52.59	-26.65	AVG	
5		0.3740	21.35	9.86	31.21	58.41	-27.20	QP	
6		0.3780	8.32	9.87	18.19	48.32	-30.13	AVG	
7		0.5500	17.68	9.84	27.52	56.00	-28.48	QP	
8		0.5540	6.00	9.84	15.84	46.00	-30.16	AVG	
9		1.5859	22.55	9.68	32.23	56.00	-23.77	QP	
10		1.5859	8.86	9.68	18.54	46.00	-27.46	AVG	
11		20.6420	23.58	9.52	33.10	60.00	-26.90	QP	
12		20.8060	15.58	9.52	25.10	50.00	-24.90	AVG	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase:	N
Test Voltage :	AC 120V/60Hz		

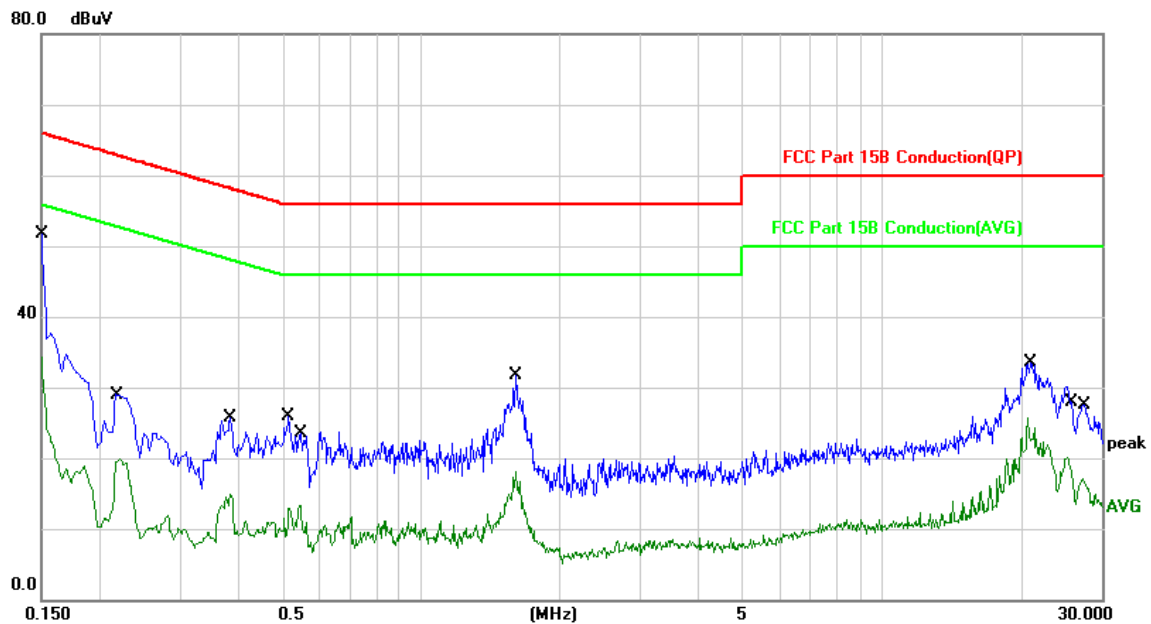

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1499	42.03	9.75	51.78	66.00	-14.22	QP	
2		0.1499	24.57	9.75	34.32	56.00	-21.68	AVG	
3		0.2220	10.05	9.76	19.81	52.74	-32.93	AVG	
4		0.3860	15.83	9.87	25.70	58.15	-32.45	QP	
5		0.5180	16.09	9.85	25.94	56.00	-30.06	QP	
6		0.5460	3.44	9.85	13.29	46.00	-32.71	AVG	
7		1.6060	22.10	9.68	31.78	56.00	-24.22	QP	
8		1.6060	8.43	9.68	18.11	46.00	-27.89	AVG	
9		20.8100	16.12	9.52	25.64	50.00	-24.36	AVG	
10		20.9780	23.88	9.52	33.40	60.00	-26.60	QP	
11		26.1140	7.69	9.45	17.14	50.00	-32.86	AVG	
12		27.4620	17.98	9.53	27.51	60.00	-32.49	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case- MIMO (802.11N-HT20 low channel)

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre (Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

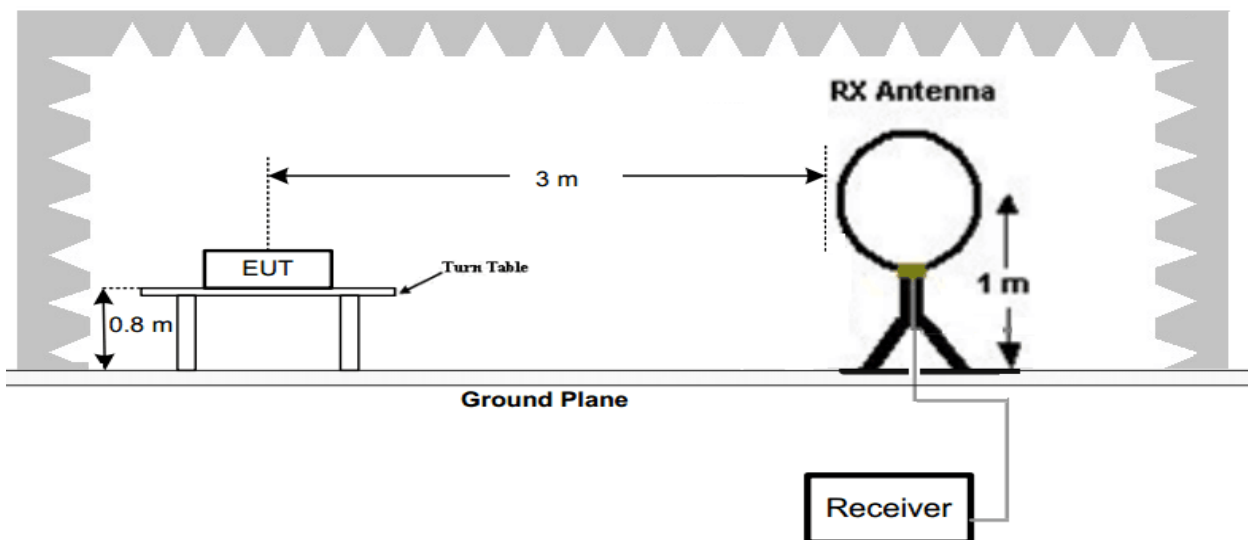

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

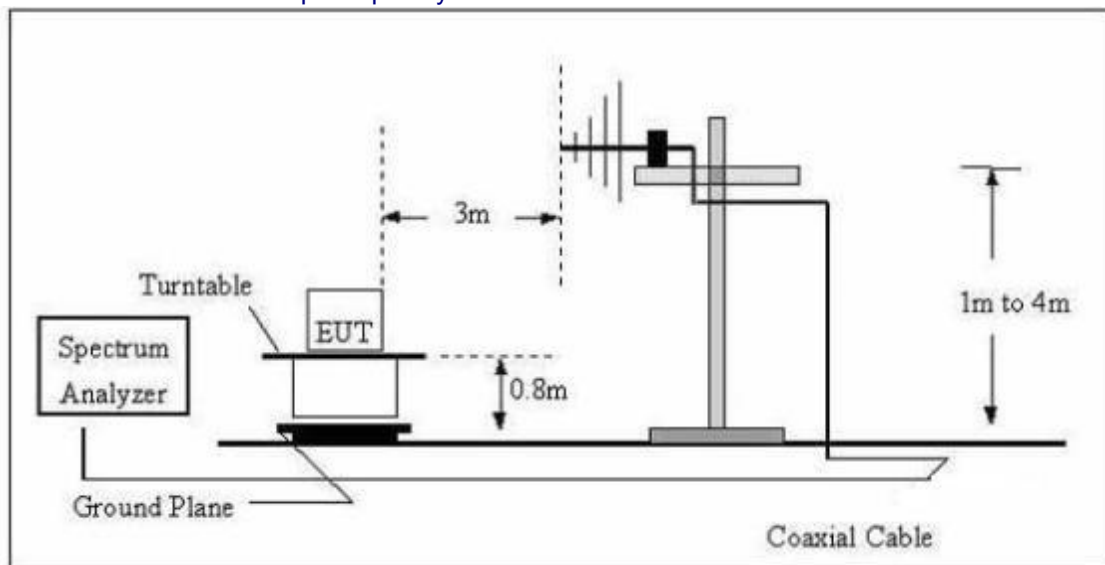

(C) Radiated Emission Test-Up Frequency Above 1GHz

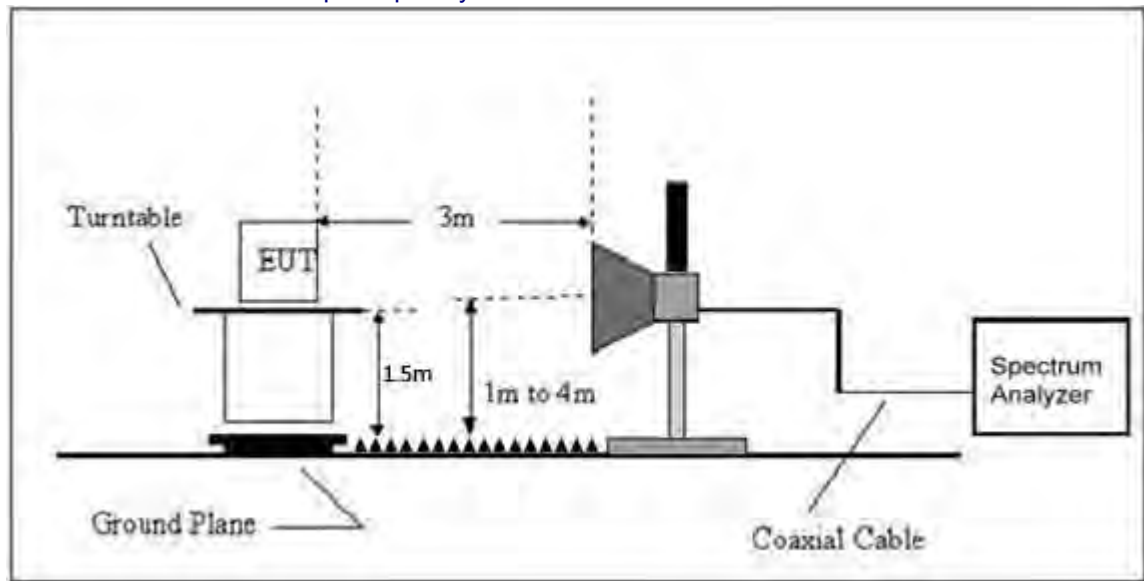

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

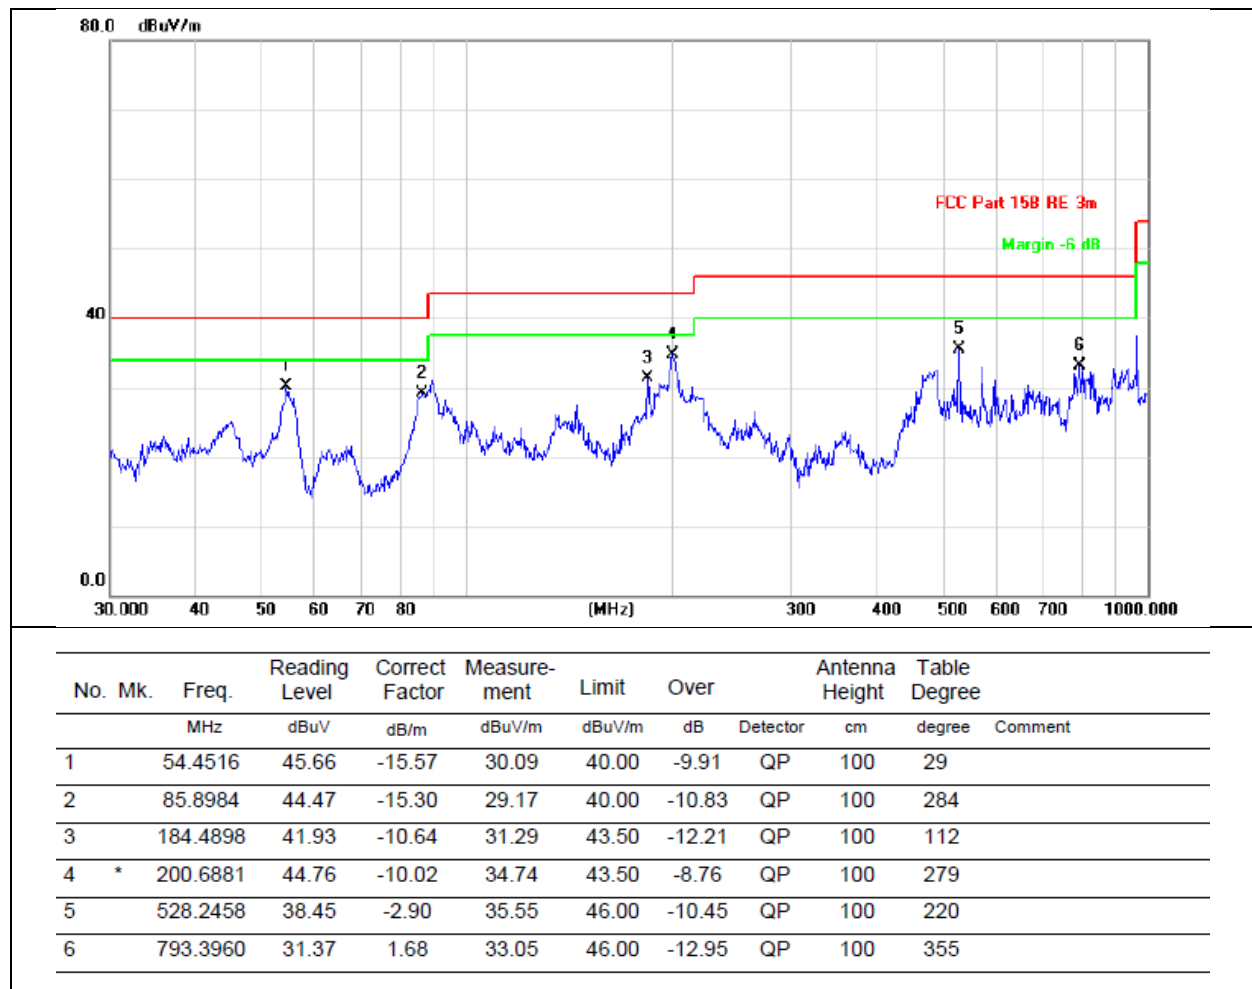

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case- MIMO (802.11N-HT20 low channel)

1GHz~25GHz

802.11b-ANT1

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	47.86	30.55	5.77	24.66	47.74	74.00	-26.26	PK
V	4824	36.35	30.55	5.77	24.66	36.23	54.00	-17.77	AV
V	7236	47.39	30.33	6.32	24.55	47.93	74.00	-26.07	PK
V	7236	35.59	30.33	6.32	24.55	36.13	54.00	-17.87	AV
V	9648	45.03	30.85	7.45	24.69	46.32	74.00	-27.68	PK
V	9648	34.60	30.85	7.45	24.69	35.89	54.00	-18.11	AV
H	4824	48.29	30.55	5.77	24.66	48.17	74.00	-25.83	PK
H	4824	37.62	30.55	5.77	24.66	37.50	54.00	-16.50	AV
H	7236	47.33	30.33	6.32	24.55	47.87	74.00	-26.13	PK
H	7236	34.49	30.33	6.32	24.55	35.03	54.00	-18.97	AV
H	9648	46.91	30.85	7.45	24.69	48.20	74.00	-25.80	PK
H	9648	34.92	30.85	7.45	24.69	36.21	54.00	-17.79	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874	46.57	30.55	5.77	24.66	46.45	74.00	-27.55	PK
V	4874	36.72	30.55	5.77	24.66	36.60	54.00	-17.40	AV
V	7311	46.33	30.33	6.32	24.55	46.87	74.00	-27.13	PK
V	7311	35.06	30.33	6.32	24.55	35.60	54.00	-18.40	AV
V	9748	45.55	30.85	7.45	24.69	46.84	74.00	-27.16	PK
V	9748	34.03	30.85	7.45	24.69	35.32	54.00	-18.68	AV
H	4874	48.72	30.55	5.77	24.66	48.60	74.00	-25.40	PK
H	4874	36.85	30.55	5.77	24.66	36.73	54.00	-17.27	AV
H	7311	46.77	30.33	6.32	24.55	47.31	74.00	-26.69	PK
H	7311	34.89	30.33	6.32	24.55	35.43	54.00	-18.57	AV
H	9748	46.14	30.85	7.45	24.69	47.43	74.00	-26.57	PK
H	9748	33.42	30.85	7.45	24.69	34.71	54.00	-19.29	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924	47.74	30.55	5.77	24.66	47.62	74.00	-26.38	PK
V	4924	36.82	30.55	5.77	24.66	36.70	54.00	-17.30	AV
V	7386	45.89	30.33	6.32	24.55	46.43	74.00	-27.57	PK
V	7386	35.57	30.33	6.32	24.55	36.11	54.00	-17.89	AV
V	9848	45.05	30.85	7.45	24.69	46.34	74.00	-27.66	PK
V	9848	32.93	30.85	7.45	24.69	34.22	54.00	-19.78	AV
H	4924	48.58	30.55	5.77	24.66	48.46	74.00	-25.54	PK
H	4924	36.20	30.55	5.77	24.66	36.08	54.00	-17.92	AV
H	7386	47.64	30.33	6.32	24.55	48.18	74.00	-25.82	PK
H	7386	35.49	30.33	6.32	24.55	36.03	54.00	-17.97	AV
H	9848	47.20	30.85	7.45	24.69	48.49	74.00	-25.51	PK
H	9848	32.56	30.85	7.45	24.69	33.85	54.00	-20.15	AV

802.11g-ANT1

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	45.77	30.55	5.77	24.66	45.65	74.00	-28.35	PK
V	4824	36.60	30.55	5.77	24.66	36.48	54.00	-17.52	AV
V	7236	47.17	30.33	6.32	24.55	47.71	74.00	-26.29	PK
V	7236	33.83	30.33	6.32	24.55	34.37	54.00	-19.63	AV

V	9648	45.66	30.85	7.45	24.69	46.95	74.00	-27.05	PK
V	9648	33.06	30.85	7.45	24.69	34.35	54.00	-19.65	AV
H	4824	47.48	30.55	5.77	24.66	47.36	74.00	-26.64	PK
H	4824	36.09	30.55	5.77	24.66	35.97	54.00	-18.03	AV
H	7236	46.62	30.33	6.32	24.55	47.16	74.00	-26.84	PK
H	7236	33.24	30.33	6.32	24.55	33.78	54.00	-20.22	AV
H	9648	46.41	30.85	7.45	24.69	47.70	74.00	-26.30	PK
H	9648	32.64	30.85	7.45	24.69	33.93	54.00	-20.07	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874	45.95	30.55	5.77	24.66	45.83	74.00	-28.17	PK
V	4874	35.68	30.55	5.77	24.66	35.56	54.00	-18.44	AV
V	7311	46.27	30.33	6.32	24.55	46.81	74.00	-27.19	PK
V	7311	32.96	30.33	6.32	24.55	33.50	54.00	-20.50	AV
V	9748	47.72	30.85	7.45	24.69	49.01	74.00	-24.99	PK
V	9748	32.91	30.85	7.45	24.69	34.20	54.00	-19.80	AV
H	4874	45.80	30.55	5.77	24.66	45.68	74.00	-28.32	PK
H	4874	37.27	30.55	5.77	24.66	37.15	54.00	-16.85	AV
H	7311	47.01	30.33	6.32	24.55	47.55	74.00	-26.45	PK
H	7311	34.10	30.33	6.32	24.55	34.64	54.00	-19.36	AV
H	9748	45.48	30.85	7.45	24.69	46.77	74.00	-27.23	PK
H	9748	34.32	30.85	7.45	24.69	35.61	54.00	-18.39	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924	45.92	30.55	5.77	24.66	45.80	74.00	-28.20	PK
V	4924	36.43	30.55	5.77	24.66	36.31	54.00	-17.69	AV
V	7386	47.03	30.33	6.32	24.55	47.57	74.00	-26.43	PK
V	7386	35.68	30.33	6.32	24.55	36.22	54.00	-17.78	AV
V	9848	46.19	30.85	7.45	24.69	47.48	74.00	-26.52	PK
V	9848	33.09	30.85	7.45	24.69	34.38	54.00	-19.62	AV
H	4924	47.31	30.55	5.77	24.66	47.19	74.00	-26.81	PK
H	4924	36.29	30.55	5.77	24.66	36.17	54.00	-17.83	AV
H	7386	47.26	30.33	6.32	24.55	47.80	74.00	-26.20	PK
H	7386	34.70	30.33	6.32	24.55	35.24	54.00	-18.76	AV
H	9848	46.69	30.85	7.45	24.69	47.98	74.00	-26.02	PK
H	9848	35.08	30.85	7.45	24.69	36.37	54.00	-17.63	AV

802.11n20-ANT1

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824	46.35	30.55	5.77	24.66	46.23	74.00	-27.77	PK
V	4824	35.56	30.55	5.77	24.66	35.44	54.00	-18.56	AV
V	7236	46.95	30.33	6.32	24.55	47.49	74.00	-26.51	PK
V	7236	34.74	30.33	6.32	24.55	35.28	54.00	-18.72	AV
V	9648	46.83	30.85	7.45	24.69	48.12	74.00	-25.88	PK
V	9648	33.84	30.85	7.45	24.69	35.13	54.00	-18.87	AV
H	4824	46.18	30.55	5.77	24.66	46.06	74.00	-27.94	PK
H	4824	37.68	30.55	5.77	24.66	37.56	54.00	-16.44	AV

H	7236	47.60	30.33	6.32	24.55	48.14	74.00	-25.86	PK
H	7236	33.01	30.33	6.32	24.55	33.55	54.00	-20.45	AV
H	9648	47.05	30.85	7.45	24.69	48.34	74.00	-25.66	PK
H	9648	33.61	30.85	7.45	24.69	34.90	54.00	-19.10	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplif ier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874	47.88	30.55	5.77	24.66	47.76	74.00	-26.24	PK
V	4874	36.66	30.55	5.77	24.66	36.54	54.00	-17.46	AV
V	7311	45.98	30.33	6.32	24.55	46.52	74.00	-27.48	PK
V	7311	33.60	30.33	6.32	24.55	34.14	54.00	-19.86	AV
V	9748	46.06	30.85	7.45	24.69	47.35	74.00	-26.65	PK
V	9748	33.52	30.85	7.45	24.69	34.81	54.00	-19.19	AV
H	4874	46.78	30.55	5.77	24.66	46.66	74.00	-27.34	PK
H	4874	36.45	30.55	5.77	24.66	36.33	54.00	-17.67	AV
H	7311	47.60	30.33	6.32	24.55	48.14	74.00	-25.86	PK
H	7311	33.07	30.33	6.32	24.55	33.61	54.00	-20.39	AV
H	9748	45.52	30.85	7.45	24.69	46.81	74.00	-27.19	PK
H	9748	34.78	30.85	7.45	24.69	36.07	54.00	-17.93	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplif ier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924	47.99	30.55	5.77	24.66	47.87	74.00	-26.13	PK
V	4924	37.27	30.55	5.77	24.66	37.15	54.00	-16.85	AV
V	7386	47.31	30.33	6.32	24.55	47.85	74.00	-26.15	PK
V	7386	35.60	30.33	6.32	24.55	36.14	54.00	-17.86	AV
V	9848	45.48	30.85	7.45	24.69	46.77	74.00	-27.23	PK
V	9848	32.95	30.85	7.45	24.69	34.24	54.00	-19.76	AV
H	4924	47.18	30.55	5.77	24.66	47.06	74.00	-26.94	PK
H	4924	37.47	30.55	5.77	24.66	37.35	54.00	-16.65	AV
H	7386	47.00	30.33	6.32	24.55	47.54	74.00	-26.46	PK
H	7386	35.74	30.33	6.32	24.55	36.28	54.00	-17.72	AV
H	9848	45.31	30.85	7.45	24.69	46.60	74.00	-27.40	PK
H	9848	32.32	30.85	7.45	24.69	33.61	54.00	-20.39	AV

802.11n40-ANT1

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplif ier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2422MHz									
V	4844	45.82	30.55	5.77	24.66	45.70	74.00	-28.30	PK
V	4844	35.46	30.55	5.77	24.66	35.34	54.00	-18.66	AV
V	7266	46.97	30.33	6.32	24.55	47.51	74.00	-26.49	PK
V	7266	34.61	30.33	6.32	24.55	35.15	54.00	-18.85	AV
V	9688	47.10	30.85	7.45	24.69	48.39	74.00	-25.61	PK
V	9688	32.71	30.85	7.45	24.69	34.00	54.00	-20.00	AV
H	4844	47.36	30.55	5.77	24.66	47.24	74.00	-26.76	PK
H	4844	37.01	30.55	5.77	24.66	36.89	54.00	-17.11	AV
H	7266	46.68	30.33	6.32	24.55	47.22	74.00	-26.78	PK
H	7266	33.60	30.33	6.32	24.55	34.14	54.00	-19.86	AV
H	9688	47.05	30.85	7.45	24.69	48.34	74.00	-25.66	PK
H	9688	34.32	30.85	7.45	24.69	35.61	54.00	-18.39	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874	47.69	30.55	5.77	24.66	47.57	74.00	-26.43	PK
V	4874	36.51	30.55	5.77	24.66	36.39	54.00	-17.61	AV
V	7311	46.05	30.33	6.32	24.55	46.59	74.00	-27.41	PK
V	7311	35.18	30.33	6.32	24.55	35.72	54.00	-18.28	AV
V	9748	47.01	30.85	7.45	24.69	48.30	74.00	-25.70	PK
V	9748	32.95	30.85	7.45	24.69	34.24	54.00	-19.76	AV
H	4874	46.23	30.55	5.77	24.66	46.11	74.00	-27.89	PK
H	4874	36.84	30.55	5.77	24.66	36.72	54.00	-17.28	AV
H	7311	47.39	30.33	6.32	24.55	47.93	74.00	-26.07	PK
H	7311	33.69	30.33	6.32	24.55	34.23	54.00	-19.77	AV
H	9748	47.46	30.85	7.45	24.69	48.75	74.00	-25.25	PK
H	9748	33.84	30.85	7.45	24.69	35.13	54.00	-18.87	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2452MHz									
V	4904	46.64	30.55	5.77	24.66	46.52	74.00	-27.48	PK
V	4904	37.63	30.55	5.77	24.66	37.51	54.00	-16.49	AV
V	7356	46.41	30.33	6.32	24.55	46.95	74.00	-27.05	PK
V	7356	33.59	30.33	6.32	24.55	34.13	54.00	-19.87	AV
V	9808	47.65	30.85	7.45	24.69	48.94	74.00	-25.06	PK
V	9808	35.11	30.85	7.45	24.69	36.40	54.00	-17.60	AV
H	4904	48.41	30.55	5.77	24.66	48.29	74.00	-25.71	PK
H	4904	35.67	30.55	5.77	24.66	35.55	54.00	-18.45	AV
H	7356	47.56	30.33	6.32	24.55	48.10	74.00	-25.90	PK
H	7356	33.65	30.33	6.32	24.55	34.19	54.00	-19.81	AV
H	9808	46.81	30.85	7.45	24.69	48.10	74.00	-25.90	PK
H	9808	34.40	30.85	7.45	24.69	35.69	54.00	-18.31	AV

802.11b-ANT2

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	45.86	30.55	5.77	24.66	45.74	74.00	-28.26	PK
V	4824	36.11	30.55	5.77	24.66	35.99	54.00	-18.01	AV
V	7236	46.92	30.33	6.32	24.55	47.46	74.00	-26.54	PK
V	7236	35.60	30.33	6.32	24.55	36.14	54.00	-17.86	AV
V	9648	45.11	30.85	7.45	24.69	46.40	74.00	-27.60	PK
V	9648	33.38	30.85	7.45	24.69	34.67	54.00	-19.33	AV
H	4824	47.48	30.55	5.77	24.66	47.36	74.00	-26.64	PK
H	4824	37.64	30.55	5.77	24.66	37.52	54.00	-16.48	AV
H	7236	46.36	30.33	6.32	24.55	46.90	74.00	-27.10	PK
H	7236	33.89	30.33	6.32	24.55	34.43	54.00	-19.57	AV
H	9648	47.12	30.85	7.45	24.69	48.41	74.00	-25.59	PK
H	9648	32.40	30.85	7.45	24.69	33.69	54.00	-20.31	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									

V	4874	47.36	30.55	5.77	24.66	47.24	74.00	-26.76	PK
V	4874	36.75	30.55	5.77	24.66	36.63	54.00	-17.37	AV
V	7311	46.94	30.33	6.32	24.55	47.48	74.00	-26.52	PK
V	7311	35.42	30.33	6.32	24.55	35.96	54.00	-18.04	AV
V	9748	46.01	30.85	7.45	24.69	47.30	74.00	-26.70	PK
V	9748	33.50	30.85	7.45	24.69	34.79	54.00	-19.21	AV
H	4874	47.72	30.55	5.77	24.66	47.60	74.00	-26.40	PK
H	4874	38.07	30.55	5.77	24.66	37.95	54.00	-16.05	AV
H	7311	46.68	30.33	6.32	24.55	47.22	74.00	-26.78	PK
H	7311	35.75	30.33	6.32	24.55	36.29	54.00	-17.71	AV
H	9748	44.77	30.85	7.45	24.69	46.06	74.00	-27.94	PK
H	9748	33.08	30.85	7.45	24.69	34.37	54.00	-19.63	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924	46.68	30.55	5.77	24.66	46.56	74.00	-27.44	PK
V	4924	35.24	30.55	5.77	24.66	35.12	54.00	-18.88	AV
V	7386	46.53	30.33	6.32	24.55	47.07	74.00	-26.93	PK
V	7386	33.36	30.33	6.32	24.55	33.90	54.00	-20.10	AV
V	9848	45.29	30.85	7.45	24.69	46.58	74.00	-27.42	PK
V	9848	32.47	30.85	7.45	24.69	33.76	54.00	-20.24	AV
H	4924	48.50	30.55	5.77	24.66	48.38	74.00	-25.62	PK
H	4924	35.77	30.55	5.77	24.66	35.65	54.00	-18.35	AV
H	7386	46.38	30.33	6.32	24.55	46.92	74.00	-27.08	PK
H	7386	33.53	30.33	6.32	24.55	34.07	54.00	-19.93	AV
H	9848	44.83	30.85	7.45	24.69	46.12	74.00	-27.88	PK
H	9848	34.13	30.85	7.45	24.69	35.42	54.00	-18.58	AV

802.11g-ANT2

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	47.54	30.55	5.77	24.66	47.42	74.00	-26.58	PK
V	4824	36.96	30.55	5.77	24.66	36.84	54.00	-17.16	AV
V	7236	47.20	30.33	6.32	24.55	47.74	74.00	-26.26	PK
V	7236	35.34	30.33	6.32	24.55	35.88	54.00	-18.12	AV
V	9648	45.45	30.85	7.45	24.69	46.74	74.00	-27.26	PK
V	9648	34.64	30.85	7.45	24.69	35.93	54.00	-18.07	AV
H	4824	47.05	30.55	5.77	24.66	46.93	74.00	-27.07	PK
H	4824	36.67	30.55	5.77	24.66	36.55	54.00	-17.45	AV
H	7236	47.31	30.33	6.32	24.55	47.85	74.00	-26.15	PK
H	7236	34.15	30.33	6.32	24.55	34.69	54.00	-19.31	AV
H	9648	47.45	30.85	7.45	24.69	48.74	74.00	-25.26	PK
H	9648	33.36	30.85	7.45	24.69	34.65	54.00	-19.35	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874	48.68	30.55	5.77	24.66	48.56	74.00	-25.44	PK
V	4874	37.60	30.55	5.77	24.66	37.48	54.00	-16.52	AV
V	7311	46.86	30.33	6.32	24.55	47.40	74.00	-26.60	PK
V	7311	35.63	30.33	6.32	24.55	36.17	54.00	-17.83	AV

V	9748	47.54	30.85	7.45	24.69	48.83	74.00	-25.17	PK
V	9748	33.10	30.85	7.45	24.69	34.39	54.00	-19.61	AV
H	4874	46.60	30.55	5.77	24.66	46.48	74.00	-27.52	PK
H	4874	37.55	30.55	5.77	24.66	37.43	54.00	-16.57	AV
H	7311	46.80	30.33	6.32	24.55	47.34	74.00	-26.66	PK
H	7311	35.06	30.33	6.32	24.55	35.60	54.00	-18.40	AV
H	9748	45.61	30.85	7.45	24.69	46.90	74.00	-27.10	PK
H	9748	32.33	30.85	7.45	24.69	33.62	54.00	-20.38	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplif ier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924	48.07	30.55	5.77	24.66	47.95	74.00	-26.05	PK
V	4924	37.38	30.55	5.77	24.66	37.26	54.00	-16.74	AV
V	7386	46.89	30.33	6.32	24.55	47.43	74.00	-26.57	PK
V	7386	34.59	30.33	6.32	24.55	35.13	54.00	-18.87	AV
V	9848	47.16	30.85	7.45	24.69	48.45	74.00	-25.55	PK
V	9848	34.24	30.85	7.45	24.69	35.53	54.00	-18.47	AV
H	4924	46.33	30.55	5.77	24.66	46.21	74.00	-27.79	PK
H	4924	36.21	30.55	5.77	24.66	36.09	54.00	-17.91	AV
H	7386	46.09	30.33	6.32	24.55	46.63	74.00	-27.37	PK
H	7386	33.06	30.33	6.32	24.55	33.60	54.00	-20.40	AV
H	9848	47.24	30.85	7.45	24.69	48.53	74.00	-25.47	PK
H	9848	32.78	30.85	7.45	24.69	34.07	54.00	-19.93	AV

802.11n-ANT2

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplif ier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824	48.37	30.55	5.77	24.66	48.25	74.00	-25.75	PK
V	4824	35.75	30.55	5.77	24.66	35.63	54.00	-18.37	AV
V	7236	47.11	30.33	6.32	24.55	47.65	74.00	-26.35	PK
V	7236	33.27	30.33	6.32	24.55	33.81	54.00	-20.19	AV
V	9648	47.50	30.85	7.45	24.69	48.79	74.00	-25.21	PK
V	9648	34.50	30.85	7.45	24.69	35.79	54.00	-18.21	AV
H	4824	47.90	30.55	5.77	24.66	47.78	74.00	-26.22	PK
H	4824	37.66	30.55	5.77	24.66	37.54	54.00	-16.46	AV
H	7236	46.62	30.33	6.32	24.55	47.16	74.00	-26.84	PK
H	7236	33.03	30.33	6.32	24.55	33.57	54.00	-20.43	AV
H	9648	46.57	30.85	7.45	24.69	47.86	74.00	-26.14	PK
H	9648	33.75	30.85	7.45	24.69	35.04	54.00	-18.96	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplif ier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874	47.21	30.55	5.77	24.66	47.09	74.00	-26.91	PK
V	4874	36.14	30.55	5.77	24.66	36.02	54.00	-17.98	AV
V	7311	47.52	30.33	6.32	24.55	48.06	74.00	-25.94	PK
V	7311	33.06	30.33	6.32	24.55	33.60	54.00	-20.40	AV
V	9748	46.35	30.85	7.45	24.69	47.64	74.00	-26.36	PK
V	9748	33.58	30.85	7.45	24.69	34.87	54.00	-19.13	AV
H	4874	47.22	30.55	5.77	24.66	47.10	74.00	-26.90	PK
H	4874	35.51	30.55	5.77	24.66	35.39	54.00	-18.61	AV

H	7311	46.93	30.33	6.32	24.55	47.47	74.00	-26.53	PK
H	7311	34.31	30.33	6.32	24.55	34.85	54.00	-19.15	AV
H	9748	44.81	30.85	7.45	24.69	46.10	74.00	-27.90	PK
H	9748	33.08	30.85	7.45	24.69	34.37	54.00	-19.63	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplif ier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924	45.96	30.55	5.77	24.66	45.84	74.00	-28.16	PK
V	4924	37.23	30.55	5.77	24.66	37.11	54.00	-16.89	AV
V	7386	46.36	30.33	6.32	24.55	46.90	74.00	-27.10	PK
V	7386	35.34	30.33	6.32	24.55	35.88	54.00	-18.12	AV
V	9848	45.14	30.85	7.45	24.69	46.43	74.00	-27.57	PK
V	9848	33.81	30.85	7.45	24.69	35.10	54.00	-18.90	AV
H	4924	48.07	30.55	5.77	24.66	47.95	74.00	-26.05	PK
H	4924	36.74	30.55	5.77	24.66	36.62	54.00	-17.38	AV
H	7386	47.17	30.33	6.32	24.55	47.71	74.00	-26.29	PK
H	7386	33.62	30.33	6.32	24.55	34.16	54.00	-19.84	AV
H	9848	46.34	30.85	7.45	24.69	47.63	74.00	-26.37	PK
H	9848	34.68	30.85	7.45	24.69	35.97	54.00	-18.03	AV

802.11n40-ANT2

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplif ier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2422MHz									
V	4844	48.06	30.55	5.77	24.66	47.94	74.00	-26.06	PK
V	4844	37.94	30.55	5.77	24.66	37.82	54.00	-16.18	AV
V	7266	46.60	30.33	6.32	24.55	47.14	74.00	-26.86	PK
V	7266	33.61	30.33	6.32	24.55	34.15	54.00	-19.85	AV
V	9688	45.51	30.85	7.45	24.69	46.80	74.00	-27.20	PK
V	9688	34.34	30.85	7.45	24.69	35.63	54.00	-18.37	AV
H	4844	46.69	30.55	5.77	24.66	46.57	74.00	-27.43	PK
H	4844	35.34	30.55	5.77	24.66	35.22	54.00	-18.78	AV
H	7266	47.19	30.33	6.32	24.55	47.73	74.00	-26.27	PK
H	7266	33.75	30.33	6.32	24.55	34.29	54.00	-19.71	AV
H	9688	45.58	30.85	7.45	24.69	46.87	74.00	-27.13	PK
H	9688	33.59	30.85	7.45	24.69	34.88	54.00	-19.12	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplif ier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874	45.94	30.55	5.77	24.66	45.82	74.00	-28.18	PK
V	4874	36.03	30.55	5.77	24.66	35.91	54.00	-18.09	AV
V	7311	46.91	30.33	6.32	24.55	47.45	74.00	-26.55	PK
V	7311	34.89	30.33	6.32	24.55	35.43	54.00	-18.57	AV
V	9748	45.83	30.85	7.45	24.69	47.12	74.00	-26.88	PK
V	9748	33.01	30.85	7.45	24.69	34.30	54.00	-19.70	AV
H	4874	46.83	30.55	5.77	24.66	46.71	74.00	-27.29	PK
H	4874	36.14	30.55	5.77	24.66	36.02	54.00	-17.98	AV
H	7311	45.93	30.33	6.32	24.55	46.47	74.00	-27.53	PK
H	7311	33.90	30.33	6.32	24.55	34.44	54.00	-19.56	AV
H	9748	46.81	30.85	7.45	24.69	48.10	74.00	-25.90	PK
H	9748	33.63	30.85	7.45	24.69	34.92	54.00	-19.08	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2452MHz									
V	4904	48.46	30.55	5.77	24.66	48.34	74.00	-25.66	PK
V	4904	35.68	30.55	5.77	24.66	35.56	54.00	-18.44	AV
V	7356	47.19	30.33	6.32	24.55	47.73	74.00	-26.27	PK
V	7356	34.97	30.33	6.32	24.55	35.51	54.00	-18.49	AV
V	9808	46.08	30.85	7.45	24.69	47.37	74.00	-26.63	PK
V	9808	34.46	30.85	7.45	24.69	35.75	54.00	-18.25	AV
H	4904	48.27	30.55	5.77	24.66	48.15	74.00	-25.85	PK
H	4904	37.88	30.55	5.77	24.66	37.76	54.00	-16.24	AV
H	7356	46.02	30.33	6.32	24.55	46.56	74.00	-27.44	PK
H	7356	32.78	30.33	6.32	24.55	33.32	54.00	-20.68	AV
H	9808	45.18	30.85	7.45	24.69	46.47	74.00	-27.53	PK
H	9808	34.62	30.85	7.45	24.69	35.91	54.00	-18.09	AV

MIMO-802.11n

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	47.66	30.55	5.77	24.66	47.54	74.00	-26.46	PK
V	4824	36.97	30.55	5.77	24.66	36.85	54.00	-17.15	AV
V	7236	47.57	30.33	6.32	24.55	48.11	74.00	-25.89	PK
V	7236	34.78	30.33	6.32	24.55	35.32	54.00	-18.68	AV
V	9648	47.05	30.85	7.45	24.69	48.34	74.00	-25.66	PK
V	9648	34.15	30.85	7.45	24.69	35.44	54.00	-18.56	AV
H	4824	45.85	30.55	5.77	24.66	45.73	74.00	-28.27	PK
H	4824	37.92	30.55	5.77	24.66	37.80	54.00	-16.20	AV
H	7236	46.58	30.33	6.32	24.55	47.12	74.00	-26.88	PK
H	7236	34.60	30.33	6.32	24.55	35.14	54.00	-18.86	AV
H	9648	47.38	30.85	7.45	24.69	48.67	74.00	-25.33	PK
H	9648	35.21	30.85	7.45	24.69	36.50	54.00	-17.50	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874	46.28	30.55	5.77	24.66	46.16	74.00	-27.84	PK
V	4874	36.27	30.55	5.77	24.66	36.15	54.00	-17.85	AV
V	7311	46.99	30.33	6.32	24.55	47.53	74.00	-26.47	PK
V	7311	35.53	30.33	6.32	24.55	36.07	54.00	-17.93	AV
V	9748	47.00	30.85	7.45	24.69	48.29	74.00	-25.71	PK
V	9748	35.12	30.85	7.45	24.69	36.41	54.00	-17.59	AV
H	4874	46.58	30.55	5.77	24.66	46.46	74.00	-27.54	PK
H	4874	35.70	30.55	5.77	24.66	35.58	54.00	-18.42	AV
H	7311	46.72	30.33	6.32	24.55	47.26	74.00	-26.74	PK
H	7311	33.00	30.33	6.32	24.55	33.54	54.00	-20.46	AV
H	9748	45.43	30.85	7.45	24.69	46.72	74.00	-27.28	PK
H	9748	34.14	30.85	7.45	24.69	35.43	54.00	-18.57	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	

High Channel:2462MHz									
V	4924	46.69	30.55	5.77	24.66	46.57	74.00	-27.43	PK
V	4924	35.25	30.55	5.77	24.66	35.13	54.00	-18.87	AV
V	7386	47.51	30.33	6.32	24.55	48.05	74.00	-25.95	PK
V	7386	34.90	30.33	6.32	24.55	35.44	54.00	-18.56	AV
V	9848	46.38	30.85	7.45	24.69	47.67	74.00	-26.33	PK
V	9848	33.92	30.85	7.45	24.69	35.21	54.00	-18.79	AV
H	4924	46.04	30.55	5.77	24.66	45.92	74.00	-28.08	PK
H	4924	35.96	30.55	5.77	24.66	35.84	54.00	-18.16	AV
H	7386	46.58	30.33	6.32	24.55	47.12	74.00	-26.88	PK
H	7386	35.55	30.33	6.32	24.55	36.09	54.00	-17.91	AV
H	9848	47.51	30.85	7.45	24.69	48.80	74.00	-25.20	PK
H	9848	33.73	30.85	7.45	24.69	35.02	54.00	-18.98	AV

MIMO-802.11n40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2422MHz									
V	4844	48.38	30.55	5.77	24.66	48.26	74.00	-25.74	PK
V	4844	36.32	30.55	5.77	24.66	36.20	54.00	-17.80	AV
V	7266	47.73	30.33	6.32	24.55	48.27	74.00	-25.73	PK
V	7266	34.31	30.33	6.32	24.55	34.85	54.00	-19.15	AV
V	9688	47.45	30.85	7.45	24.69	48.74	74.00	-25.26	PK
V	9688	32.65	30.85	7.45	24.69	33.94	54.00	-20.06	AV
H	4844	48.43	30.55	5.77	24.66	48.31	74.00	-25.69	PK
H	4844	37.37	30.55	5.77	24.66	37.25	54.00	-16.75	AV
H	7266	46.05	30.33	6.32	24.55	46.59	74.00	-27.41	PK
H	7266	33.75	30.33	6.32	24.55	34.29	54.00	-19.71	AV
H	9688	46.94	30.85	7.45	24.69	48.23	74.00	-25.77	PK
H	9688	33.82	30.85	7.45	24.69	35.11	54.00	-18.89	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874	47.35	30.55	5.77	24.66	47.23	74.00	-26.77	PK
V	4874	37.46	30.55	5.77	24.66	37.34	54.00	-16.66	AV
V	7311	46.50	30.33	6.32	24.55	47.04	74.00	-26.96	PK
V	7311	35.04	30.33	6.32	24.55	35.58	54.00	-18.42	AV
V	9748	46.78	30.85	7.45	24.69	48.07	74.00	-25.93	PK
V	9748	33.14	30.85	7.45	24.69	34.43	54.00	-19.57	AV
H	4874	47.01	30.55	5.77	24.66	46.89	74.00	-27.11	PK
H	4874	37.92	30.55	5.77	24.66	37.80	54.00	-16.20	AV
H	7311	47.35	30.33	6.32	24.55	47.89	74.00	-26.11	PK
H	7311	33.60	30.33	6.32	24.55	34.14	54.00	-19.86	AV
H	9748	46.04	30.85	7.45	24.69	47.33	74.00	-26.67	PK
H	9748	33.05	30.85	7.45	24.69	34.34	54.00	-19.66	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2452MHz									
V	4904	47.91	30.55	5.77	24.66	47.79	74.00	-26.21	PK
V	4904	36.29	30.55	5.77	24.66	36.17	54.00	-17.83	AV
V	7356	46.91	30.33	6.32	24.55	47.45	74.00	-26.55	PK

V	7356	33.78	30.33	6.32	24.55	34.32	54.00	-19.68	AV
V	9808	47.35	30.85	7.45	24.69	48.64	74.00	-25.36	PK
V	9808	33.57	30.85	7.45	24.69	34.86	54.00	-19.14	AV
H	4904	47.75	30.55	5.77	24.66	47.63	74.00	-26.37	PK
H	4904	35.69	30.55	5.77	24.66	35.57	54.00	-18.43	AV
H	7356	47.73	30.33	6.32	24.55	48.27	74.00	-25.73	PK
H	7356	32.96	30.33	6.32	24.55	33.50	54.00	-20.50	AV
H	9808	46.34	30.85	7.45	24.69	47.63	74.00	-26.37	PK
H	9808	32.53	30.85	7.45	24.69	33.82	54.00	-20.18	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. RADIATED BAND EMISSION MEASUREMENT**5.1 TEST REQUIREMENT:**

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

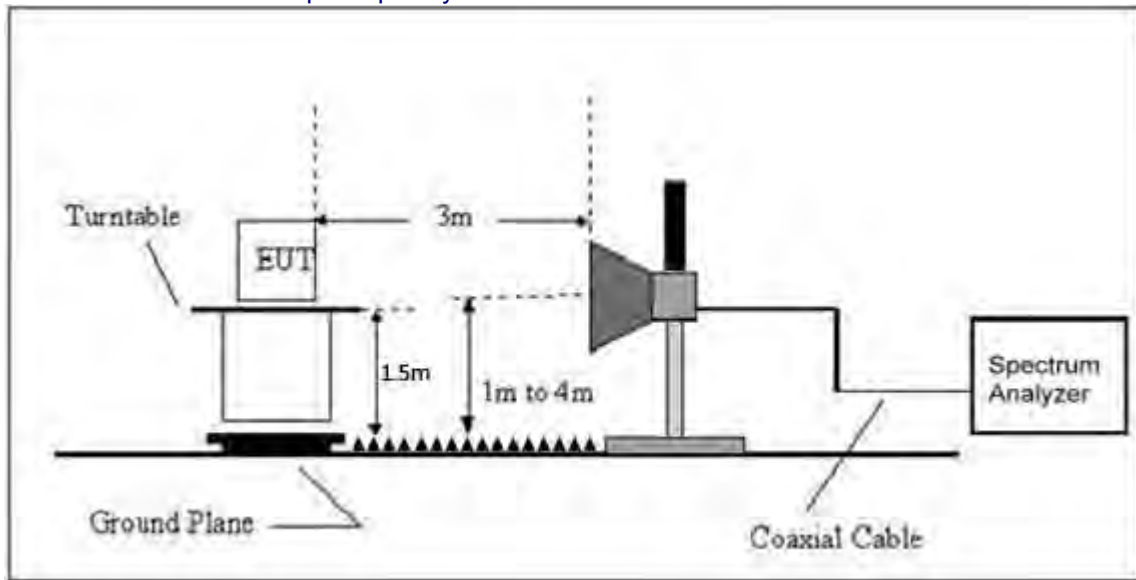

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

ANT1-802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dBuV/ m)	Detect or Type	Result
Low Channel 2412MHz										
H	2390.00	51.79	30.22	4.85	23.98	50.40	74.00	-23.60	PK	PASS
H	2390.00	37.51	30.22	4.85	23.98	36.12	54.00	-17.88	AV	PASS
H	2400.00	53.37	30.22	4.85	23.98	51.98	74.00	-22.02	PK	PASS
H	2400.00	38.21	30.22	4.85	23.98	36.82	54.00	-17.18	AV	PASS
V	2390.00	53.16	30.22	4.85	23.98	51.77	74.00	-22.23	PK	PASS
V	2390.00	39.69	30.22	4.85	23.98	38.30	54.00	-15.70	AV	PASS
V	2400.00	52.53	30.22	4.85	23.98	51.14	74.00	-22.86	PK	PASS
V	2400.00	37.64	30.22	4.85	23.98	36.25	54.00	-17.75	AV	PASS
High Channel 2462MHz										
H	2483.50	52.83	30.22	4.85	23.98	51.44	74.00	-22.56	PK	PASS
H	2483.50	37.92	30.22	4.85	23.98	36.53	54.00	-17.47	AV	PASS
H	2500.00	53.62	30.22	4.85	23.98	52.23	74.00	-21.77	PK	PASS
H	2500.00	37.31	30.22	4.85	23.98	35.92	54.00	-18.08	AV	PASS
V	2483.50	53.45	30.22	4.85	23.98	52.06	74.00	-21.94	PK	PASS
V	2483.50	37.47	30.22	4.85	23.98	36.08	54.00	-17.92	AV	PASS
V	2500.00	52.22	30.22	4.85	23.98	50.83	74.00	-23.17	PK	PASS
V	2500.00	38.65	30.22	4.85	23.98	37.26	54.00	-16.74	AV	PASS

ANT1-802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dBuV/ m)	Detect or Type	Result
Low Channel 2412MHz										
H	2390.00	51.87	30.22	4.85	23.98	50.48	74.00	-23.52	PK	PASS
H	2390.00	39.54	30.22	4.85	23.98	38.15	54.00	-15.85	AV	PASS
H	2400.00	54.38	30.22	4.85	23.98	52.99	74.00	-21.01	PK	PASS
H	2400.00	37.24	30.22	4.85	23.98	35.85	54.00	-18.15	AV	PASS
V	2390.00	53.43	30.22	4.85	23.98	52.04	74.00	-21.96	PK	PASS
V	2390.00	38.17	30.22	4.85	23.98	36.78	54.00	-17.22	AV	PASS
V	2400.00	52.61	30.22	4.85	23.98	51.22	74.00	-22.78	PK	PASS
V	2400.00	37.32	30.22	4.85	23.98	35.93	54.00	-18.07	AV	PASS
High Channel 2462MHz										
H	2483.50	52.67	30.22	4.85	23.98	51.28	74.00	-22.72	PK	PASS
H	2483.50	40.09	30.22	4.85	23.98	38.70	54.00	-15.30	AV	PASS
H	2500.00	52.66	30.22	4.85	23.98	51.27	74.00	-22.73	PK	PASS
H	2500.00	37.62	30.22	4.85	23.98	36.23	54.00	-17.77	AV	PASS
V	2483.50	52.44	30.22	4.85	23.98	51.05	74.00	-22.95	PK	PASS
V	2483.50	38.24	30.22	4.85	23.98	36.85	54.00	-17.15	AV	PASS
V	2500.00	53.20	30.22	4.85	23.98	51.81	74.00	-22.19	PK	PASS
V	2500.00	36.69	30.22	4.85	23.98	35.30	54.00	-18.70	AV	PASS

ANT1-802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dBuV/ m)	Detect or Type	Result
Low Channel 2412MHz										
H	2390.00	51.31	30.22	4.85	23.98	49.92	74.00	-24.08	PK	PASS
H	2390.00	38.68	30.22	4.85	23.98	37.29	54.00	-16.71	AV	PASS
H	2400.00	53.69	30.22	4.85	23.98	52.30	74.00	-21.70	PK	PASS
H	2400.00	36.28	30.22	4.85	23.98	34.89	54.00	-19.11	AV	PASS
V	2390.00	52.59	30.22	4.85	23.98	51.20	74.00	-22.80	PK	PASS

V	2390.00	39.37	30.22	4.85	23.98	37.98	54.00	-16.02	AV	PASS
V	2400.00	51.89	30.22	4.85	23.98	50.50	74.00	-23.50	PK	PASS
V	2400.00	38.74	30.22	4.85	23.98	37.35	54.00	-16.65	AV	PASS
High Channel 2462MHz										
H	2483.50	52.91	30.22	4.85	23.98	51.52	74.00	-22.48	PK	PASS
H	2483.50	39.34	30.22	4.85	23.98	37.95	54.00	-16.05	AV	PASS
H	2500.00	52.10	30.22	4.85	23.98	50.71	74.00	-23.29	PK	PASS
H	2500.00	37.66	30.22	4.85	23.98	36.27	54.00	-17.73	AV	PASS
V	2483.50	52.27	30.22	4.85	23.98	50.88	74.00	-23.12	PK	PASS
V	2483.50	38.80	30.22	4.85	23.98	37.41	54.00	-16.59	AV	PASS
V	2500.00	53.04	30.22	4.85	23.98	51.65	74.00	-22.35	PK	PASS
V	2500.00	37.35	30.22	4.85	23.98	35.96	54.00	-18.04	AV	PASS

ANT1-802.11n40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)	Detect or Type	Result
Low Channel 2422MHz										
H	2390.00	52.79	30.22	4.85	23.98	51.40	74.00	-22.60	PK	PASS
H	2390.00	38.98	30.22	4.85	23.98	37.59	54.00	-16.41	AV	PASS
H	2400.00	53.48	30.22	4.85	23.98	52.09	74.00	-21.91	PK	PASS
H	2400.00	38.91	30.22	4.85	23.98	37.52	54.00	-16.48	AV	PASS
V	2390.00	52.06	30.22	4.85	23.98	50.67	74.00	-23.33	PK	PASS
V	2390.00	38.16	30.22	4.85	23.98	36.77	54.00	-17.23	AV	PASS
V	2400.00	53.80	30.22	4.85	23.98	52.41	74.00	-21.59	PK	PASS
V	2400.00	38.26	30.22	4.85	23.98	36.87	54.00	-17.13	AV	PASS
High Channel 2452MHz										
H	2483.50	51.81	30.22	4.85	23.98	50.42	74.00	-23.58	PK	PASS
H	2483.50	38.59	30.22	4.85	23.98	37.20	54.00	-16.80	AV	PASS
H	2500.00	53.35	30.22	4.85	23.98	51.96	74.00	-22.04	PK	PASS
H	2500.00	38.22	30.22	4.85	23.98	36.83	54.00	-17.17	AV	PASS
V	2483.50	53.41	30.22	4.85	23.98	52.02	74.00	-21.98	PK	PASS
V	2483.50	40.00	30.22	4.85	23.98	38.61	54.00	-15.39	AV	PASS
V	2500.00	53.44	30.22	4.85	23.98	52.05	74.00	-21.95	PK	PASS
V	2500.00	37.01	30.22	4.85	23.98	35.62	54.00	-18.38	AV	PASS

ANT2-802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)	Detect or Type	Result
Low Channel 2412MHz										
H	2390.00	52.03	30.22	4.85	23.98	50.64	74.00	-23.36	PK	PASS
H	2390.00	39.53	30.22	4.85	23.98	38.14	54.00	-15.86	AV	PASS
H	2400.00	53.65	30.22	4.85	23.98	52.26	74.00	-21.74	PK	PASS
H	2400.00	36.34	30.22	4.85	23.98	34.95	54.00	-19.05	AV	PASS
V	2390.00	52.41	30.22	4.85	23.98	51.02	74.00	-22.98	PK	PASS
V	2390.00	38.66	30.22	4.85	23.98	37.27	54.00	-16.73	AV	PASS
V	2400.00	53.35	30.22	4.85	23.98	51.96	74.00	-22.04	PK	PASS
V	2400.00	36.49	30.22	4.85	23.98	35.10	54.00	-18.90	AV	PASS
High Channel 2462MHz										
H	2483.50	52.43	30.22	4.85	23.98	51.04	74.00	-22.96	PK	PASS
H	2483.50	37.95	30.22	4.85	23.98	36.56	54.00	-17.44	AV	PASS
H	2500.00	53.13	30.22	4.85	23.98	51.74	74.00	-22.26	PK	PASS
H	2500.00	37.70	30.22	4.85	23.98	36.31	54.00	-17.69	AV	PASS
V	2483.50	53.15	30.22	4.85	23.98	51.76	74.00	-22.24	PK	PASS
V	2483.50	38.35	30.22	4.85	23.98	36.96	54.00	-17.04	AV	PASS

V	2500.00	53.74	30.22	4.85	23.98	52.35	74.00	-21.65	PK	PASS
V	2500.00	37.85	30.22	4.85	23.98	36.46	54.00	-17.54	AV	PASS

ANT2-802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)	Detect or Type	Result
Low Channel 2412MHz										
H	2390.00	53.57	30.22	4.85	23.98	52.18	74.00	-21.82	PK	PASS
H	2390.00	38.79	30.22	4.85	23.98	37.40	54.00	-16.60	AV	PASS
H	2400.00	52.57	30.22	4.85	23.98	51.18	74.00	-22.82	PK	PASS
H	2400.00	38.64	30.22	4.85	23.98	37.25	54.00	-16.75	AV	PASS
V	2390.00	51.80	30.22	4.85	23.98	50.41	74.00	-23.59	PK	PASS
V	2390.00	38.41	30.22	4.85	23.98	37.02	54.00	-16.98	AV	PASS
V	2400.00	54.23	30.22	4.85	23.98	52.84	74.00	-21.16	PK	PASS
V	2400.00	38.10	30.22	4.85	23.98	36.71	54.00	-17.29	AV	PASS
High Channel 2462MHz										
H	2483.50	51.20	30.22	4.85	23.98	49.81	74.00	-24.19	PK	PASS
H	2483.50	39.34	30.22	4.85	23.98	37.95	54.00	-16.05	AV	PASS
H	2500.00	52.18	30.22	4.85	23.98	50.79	74.00	-23.21	PK	PASS
H	2500.00	36.38	30.22	4.85	23.98	34.99	54.00	-19.01	AV	PASS
V	2483.50	52.47	30.22	4.85	23.98	51.08	74.00	-22.92	PK	PASS
V	2483.50	39.26	30.22	4.85	23.98	37.87	54.00	-16.13	AV	PASS
V	2500.00	52.17	30.22	4.85	23.98	50.78	74.00	-23.22	PK	PASS
V	2500.00	37.06	30.22	4.85	23.98	35.67	54.00	-18.33	AV	PASS

ANT2-802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)	Detect or Type	Result
Low Channel 2412MHz										
H	2390.00	52.72	30.22	4.85	23.98	51.33	74.00	-22.67	PK	PASS
H	2390.00	39.68	30.22	4.85	23.98	38.29	54.00	-15.71	AV	PASS
H	2400.00	53.29	30.22	4.85	23.98	51.90	74.00	-22.10	PK	PASS
H	2400.00	38.02	30.22	4.85	23.98	36.63	54.00	-17.37	AV	PASS
V	2390.00	53.11	30.22	4.85	23.98	51.72	74.00	-22.28	PK	PASS
V	2390.00	39.52	30.22	4.85	23.98	38.13	54.00	-15.87	AV	PASS
V	2400.00	52.55	30.22	4.85	23.98	51.16	74.00	-22.84	PK	PASS
V	2400.00	37.53	30.22	4.85	23.98	36.14	54.00	-17.86	AV	PASS
High Channel 2462MHz										
H	2483.50	53.68	30.22	4.85	23.98	52.29	74.00	-21.71	PK	PASS
H	2483.50	38.79	30.22	4.85	23.98	37.40	54.00	-16.60	AV	PASS
H	2500.00	53.45	30.22	4.85	23.98	52.06	74.00	-21.94	PK	PASS
H	2500.00	36.85	30.22	4.85	23.98	35.46	54.00	-18.54	AV	PASS
V	2483.50	51.72	30.22	4.85	23.98	50.33	74.00	-23.67	PK	PASS
V	2483.50	39.29	30.22	4.85	23.98	37.90	54.00	-16.10	AV	PASS
V	2500.00	52.36	30.22	4.85	23.98	50.97	74.00	-23.03	PK	PASS
V	2500.00	36.48	30.22	4.85	23.98	35.09	54.00	-18.91	AV	PASS

ANT2-802.11n40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)	Detect or Type	Result
Low Channel 2422MHz										
H	2390.00	51.62	30.22	4.85	23.98	50.23	74.00	-23.77	PK	PASS

H	2390.00	38.30	30.22	4.85	23.98	36.91	54.00	-17.09	AV	PASS
H	2400.00	52.16	30.22	4.85	23.98	50.77	74.00	-23.23	PK	PASS
H	2400.00	39.20	30.22	4.85	23.98	37.81	54.00	-16.19	AV	PASS
V	2390.00	53.61	30.22	4.85	23.98	52.22	74.00	-21.78	PK	PASS
V	2390.00	39.17	30.22	4.85	23.98	37.78	54.00	-16.22	AV	PASS
V	2400.00	53.47	30.22	4.85	23.98	52.08	74.00	-21.92	PK	PASS
V	2400.00	38.63	30.22	4.85	23.98	37.24	54.00	-16.76	AV	PASS
High Channel 2452MHz										
H	2483.50	52.88	30.22	4.85	23.98	51.49	74.00	-22.51	PK	PASS
H	2483.50	37.59	30.22	4.85	23.98	36.20	54.00	-17.80	AV	PASS
H	2500.00	54.49	30.22	4.85	23.98	53.10	74.00	-20.90	PK	PASS
H	2500.00	38.30	30.22	4.85	23.98	36.91	54.00	-17.09	AV	PASS
V	2483.50	51.67	30.22	4.85	23.98	50.28	74.00	-23.72	PK	PASS
V	2483.50	39.22	30.22	4.85	23.98	37.83	54.00	-16.17	AV	PASS
V	2500.00	52.98	30.22	4.85	23.98	51.59	74.00	-22.41	PK	PASS
V	2500.00	37.63	30.22	4.85	23.98	36.24	54.00	-17.76	AV	PASS

MIMO-802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dBuV/ m)	Detect or Type	Result
Low Channel 2412MHz										
H	2390.00	52.55	30.22	4.85	23.98	51.16	74.00	-22.84	PK	PASS
H	2390.00	38.01	30.22	4.85	23.98	36.62	54.00	-17.38	AV	PASS
H	2400.00	53.99	30.22	4.85	23.98	52.60	74.00	-21.40	PK	PASS
H	2400.00	38.34	30.22	4.85	23.98	36.95	54.00	-17.05	AV	PASS
V	2390.00	52.70	30.22	4.85	23.98	51.31	74.00	-22.69	PK	PASS
V	2390.00	38.59	30.22	4.85	23.98	37.20	54.00	-16.80	AV	PASS
V	2400.00	52.66	30.22	4.85	23.98	51.27	74.00	-22.73	PK	PASS
V	2400.00	36.50	30.22	4.85	23.98	35.11	54.00	-18.89	AV	PASS
High Channel 2462MHz										
H	2483.50	53.72	30.22	4.85	23.98	52.33	74.00	-21.67	PK	PASS
H	2483.50	38.70	30.22	4.85	23.98	37.31	54.00	-16.69	AV	PASS
H	2500.00	53.75	30.22	4.85	23.98	52.36	74.00	-21.64	PK	PASS
H	2500.00	39.13	30.22	4.85	23.98	37.74	54.00	-16.26	AV	PASS
V	2483.50	52.93	30.22	4.85	23.98	51.54	74.00	-22.46	PK	PASS
V	2483.50	38.63	30.22	4.85	23.98	37.24	54.00	-16.76	AV	PASS
V	2500.00	52.34	30.22	4.85	23.98	50.95	74.00	-23.05	PK	PASS
V	2500.00	37.38	30.22	4.85	23.98	35.99	54.00	-18.01	AV	PASS

802.11n40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dBuV/ m)	Detect or Type	Result
Low Channel 2422MHz										
H	2390.00	52.75	30.22	4.85	23.98	51.36	74.00	-22.64	PK	PASS
H	2390.00	40.13	30.22	4.85	23.98	38.74	54.00	-15.26	AV	PASS
H	2400.00	53.64	30.22	4.85	23.98	52.25	74.00	-21.75	PK	PASS
H	2400.00	38.05	30.22	4.85	23.98	36.66	54.00	-17.34	AV	PASS
V	2390.00	53.19	30.22	4.85	23.98	51.80	74.00	-22.20	PK	PASS
V	2390.00	39.67	30.22	4.85	23.98	38.28	54.00	-15.72	AV	PASS
V	2400.00	54.71	30.22	4.85	23.98	53.32	74.00	-20.68	PK	PASS
V	2400.00	37.72	30.22	4.85	23.98	36.33	54.00	-17.67	AV	PASS
High Channel 2452MHz										
H	2483.50	50.97	30.22	4.85	23.98	49.58	74.00	-24.42	PK	PASS
H	2483.50	39.69	30.22	4.85	23.98	38.30	54.00	-15.70	AV	PASS

H	2500.00	52.70	30.22	4.85	23.98	51.31	74.00	-22.69	PK	PASS
H	2500.00	37.09	30.22	4.85	23.98	35.70	54.00	-18.30	AV	PASS
V	2483.50	52.70	30.22	4.85	23.98	51.31	74.00	-22.69	PK	PASS
V	2483.50	39.45	30.22	4.85	23.98	38.06	54.00	-15.94	AV	PASS
V	2500.00	54.14	30.22	4.85	23.98	52.75	74.00	-21.25	PK	PASS
V	2500.00	38.60	30.22	4.85	23.98	37.21	54.00	-16.79	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

6.POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidance v 05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

8. OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP**8.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. Refer to statement below for compliance. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed. Antenna Connected Construction The antenna is FPC antenna, the best case gain of the 3.64dBi;, reference to the below photo for details	
	

11. APPENDIX1

11.1. -6DB BANDWIDTH

Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	8.68	500	Pass
NVNT	ANT1	802.11b	2437.00	8.66	500	Pass
NVNT	ANT1	802.11b	2462.00	8.45	500	Pass
NVNT	ANT1	802.11g	2412.00	16.52	500	Pass
NVNT	ANT1	802.11g	2437.00	16.52	500	Pass
NVNT	ANT1	802.11g	2462.00	16.52	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	17.73	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	17.72	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	17.72	500	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	36.54	500	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	36.53	500	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	36.52	500	Pass

Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT2	802.11b	2412.00	8.45	500	Pass
NVNT	ANT2	802.11b	2437.00	8.46	500	Pass
NVNT	ANT2	802.11b	2462.00	8.46	500	Pass
NVNT	ANT2	802.11g	2412.00	16.52	500	Pass
NVNT	ANT2	802.11g	2437.00	16.53	500	Pass
NVNT	ANT2	802.11g	2462.00	16.52	500	Pass
NVNT	ANT2	802.11n(HT20)	2412.00	17.73	500	Pass
NVNT	ANT2	802.11n(HT20)	2437.00	17.72	500	Pass
NVNT	ANT2	802.11n(HT20)	2462.00	17.72	500	Pass
NVNT	ANT2	802.11n(HT40)	2422.00	36.52	500	Pass
NVNT	ANT2	802.11n(HT40)	2437.00	36.53	500	Pass
NVNT	ANT2	802.11n(HT40)	2452.00	36.53	500	Pass

ANT1

**-6dB_Bandwidth_2_4GWiFi_802_11b_2437**



-6dB Bandwidth 2_4GWiFi 802_11b 2462



-6dB Bandwidth 2_4GWiFi 802_11g 2412




-6dB Bandwidth 2_4GWiFi 802_11g 2437




-6dB_Bandwidth_2_4GWiFi_802_11g_2462




-6dB_Bandwidth_2_4GWiFi_802_11n(HT20)_2412

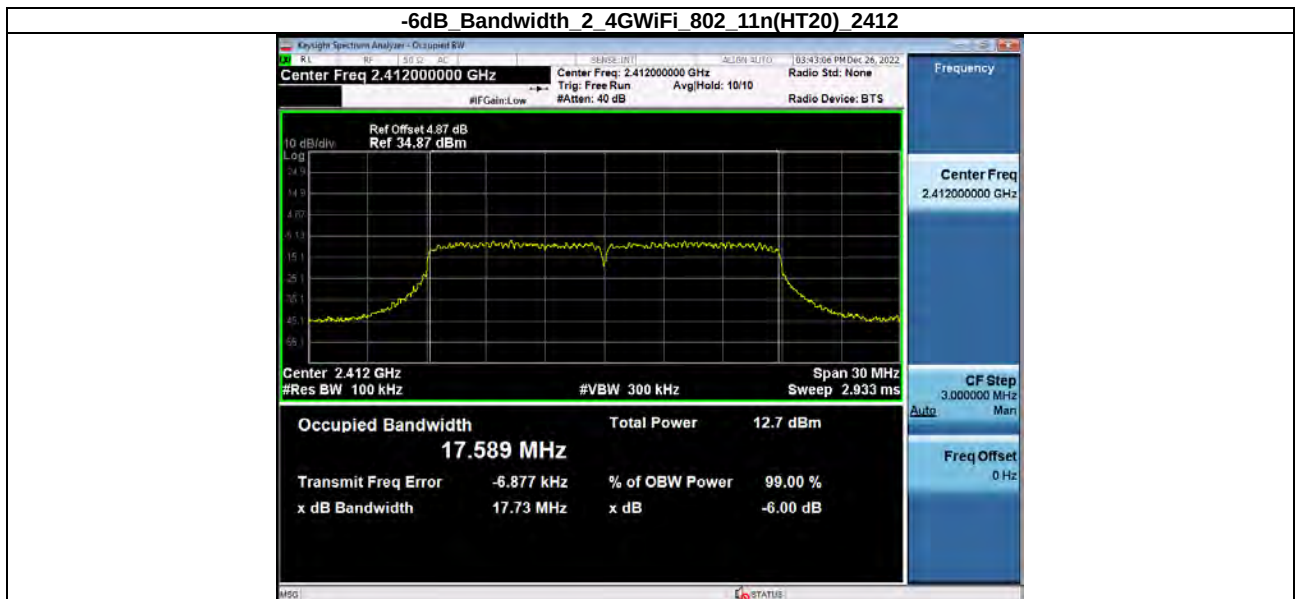


-6dB_Bandwidth_2_4GWiFi_802_11n(HT20)_2437

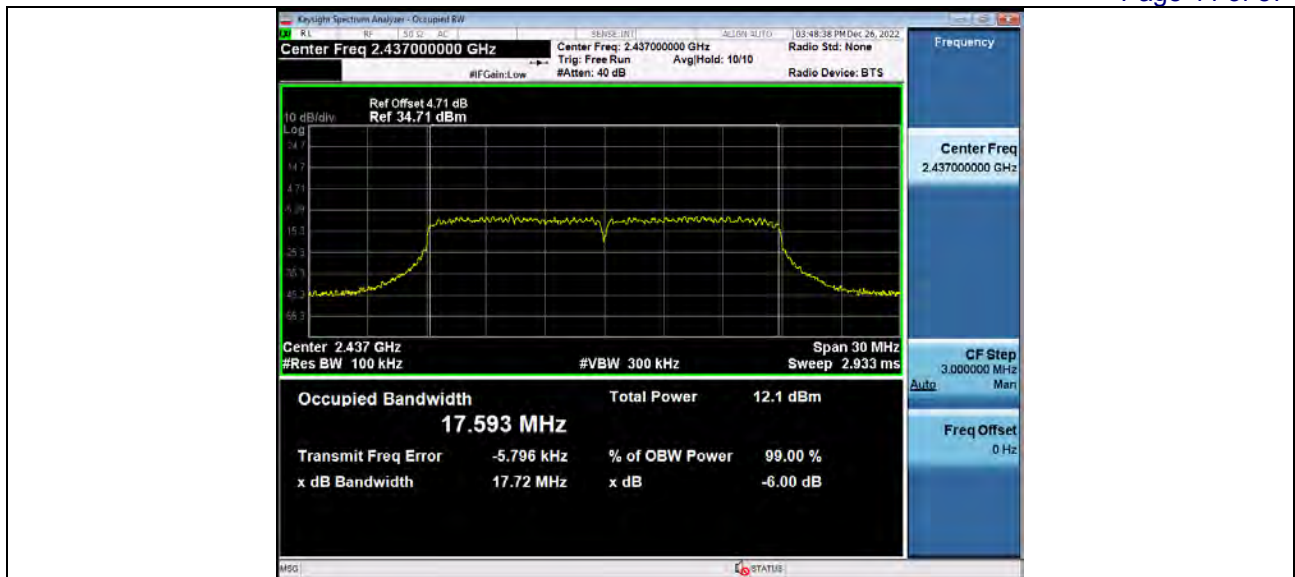


-6dB_Bandwidth 2_4GWiFi 802_11n(HT20) 2462

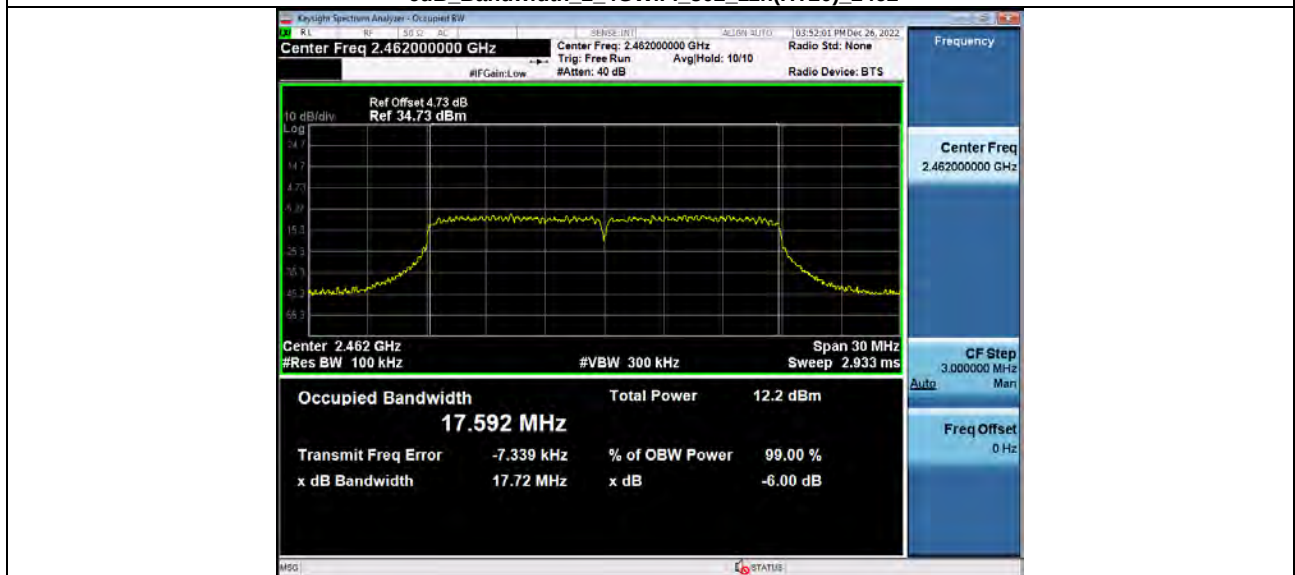


-6dB_Bandwidth 2_4GWiFi 802_11n(HT40) 2422

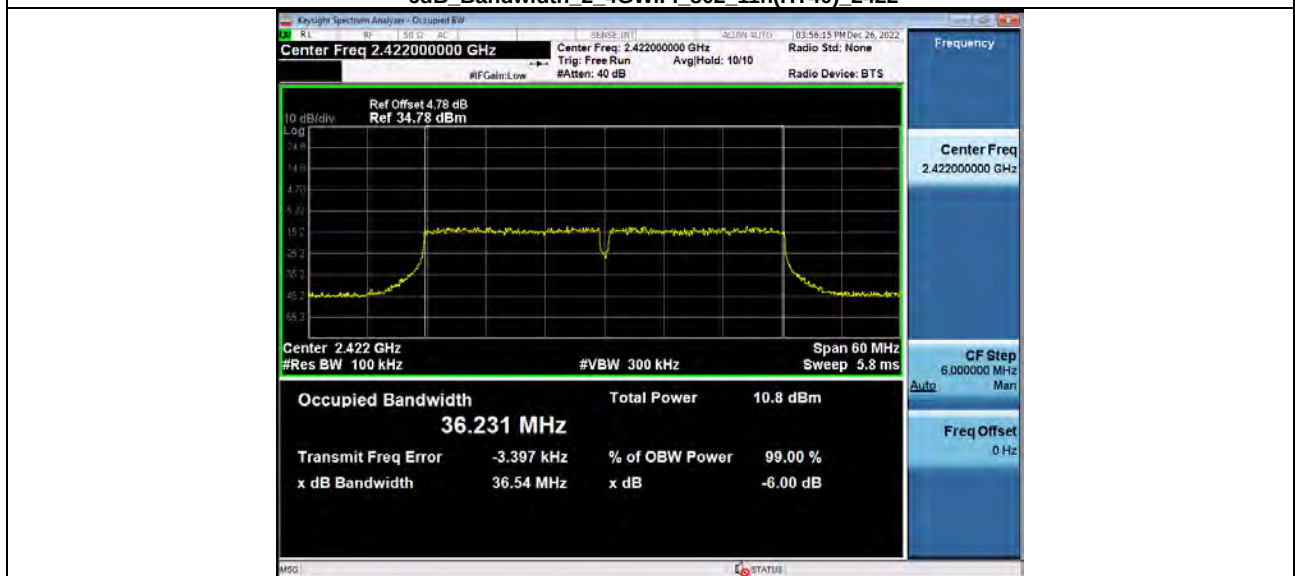

-6dB_Bandwidth 2_4GWiFi 802_11n(HT40) 2437

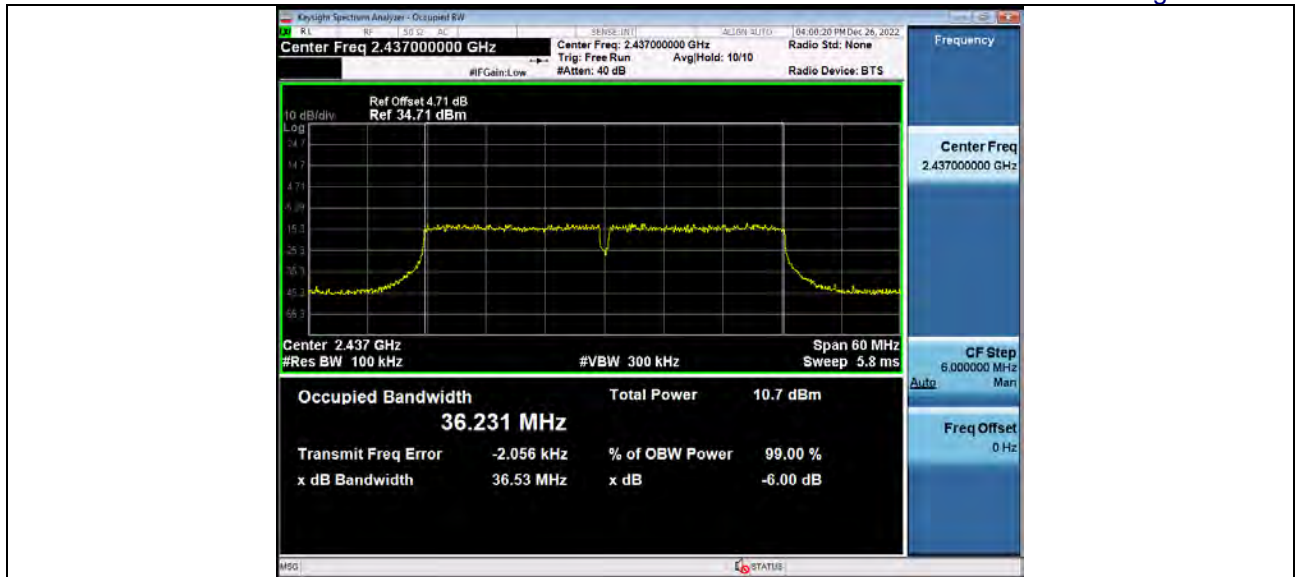


-6dB Bandwidth 2_4WiFi 802_11n(HT40) 2452

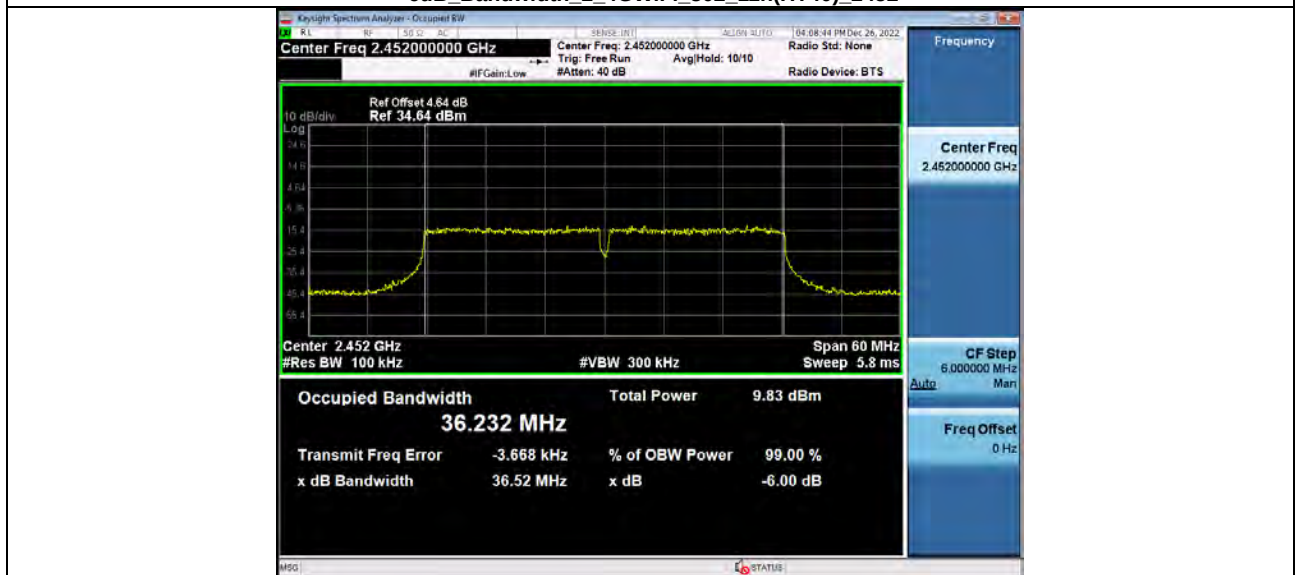

ANT2

-6dB Bandwidth 2_4WiFi 802_11b 2412

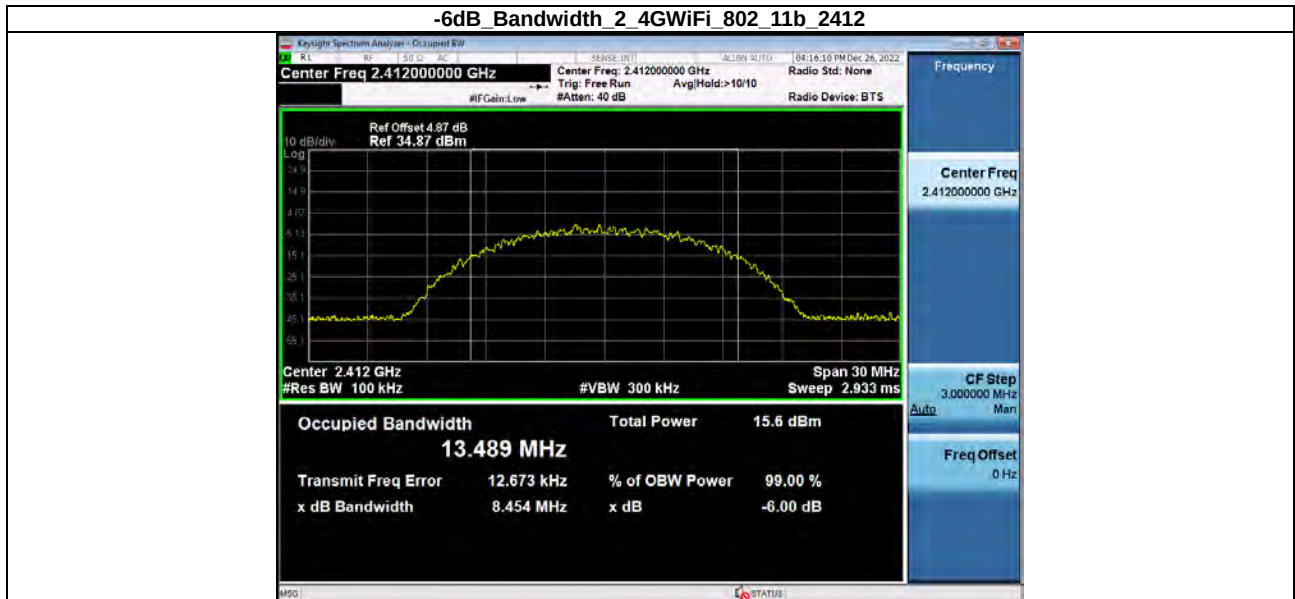

-6dB_Bandwidth_2_4GWiFi_802_11b_2437




-6dB_Bandwidth_2_4GWiFi_802_11b_2462




-6dB_Bandwidth_2_4GWiFi_802_11g_2412



-6dB_Bandwidth_2_4GWiFi_802_11g_2437

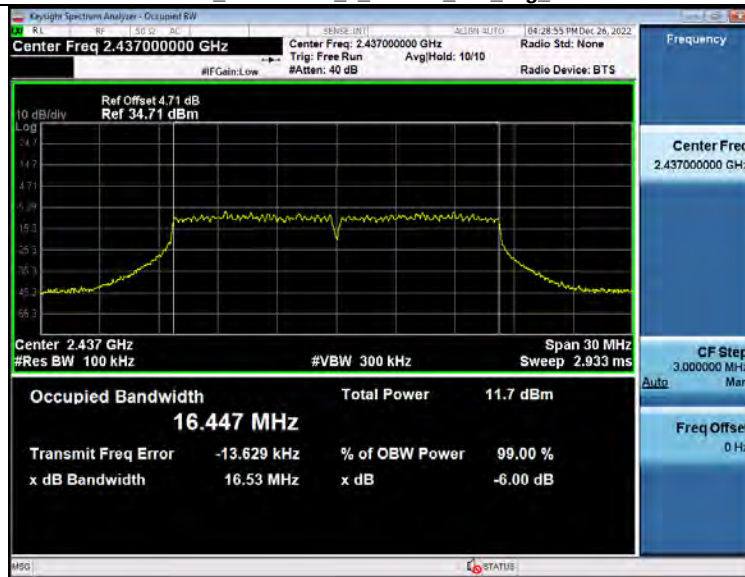

-6dB_Bandwidth_2_4GWiFi_802_11g_2462

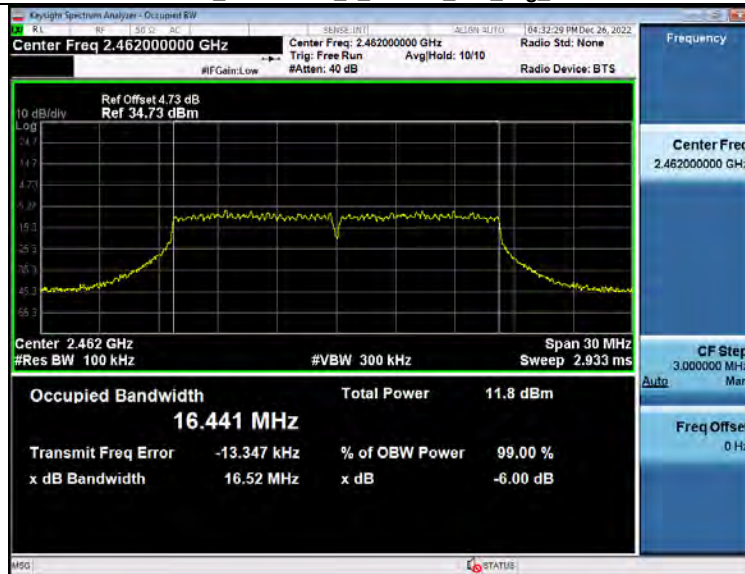


-6dB_Bandwidth_2_4GWiFi_802_11n(HT20)_2412




-6dB_Bandwidth_2_4GWiFi_802_11n(HT20)_2437




-6dB_Bandwidth_2_4GWiFi_802_11n(HT20)_2462

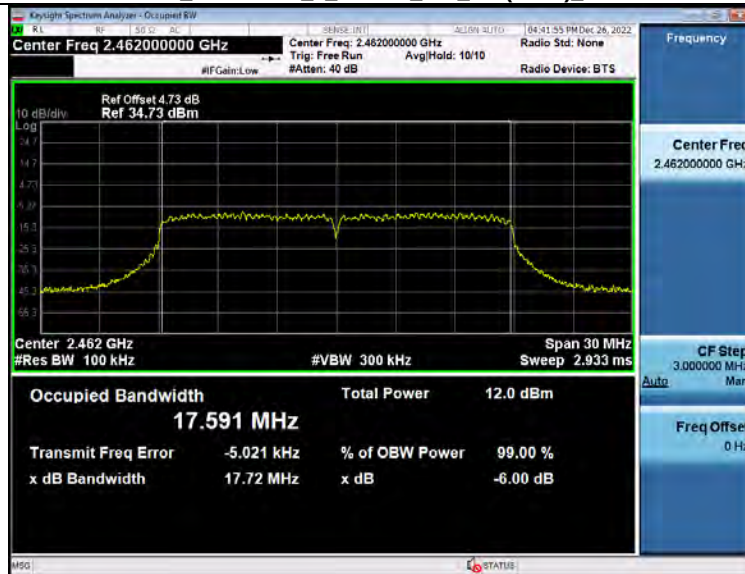

-6dB_Bandwidth_2_4GWiFi_802_11n(HT40)_2422

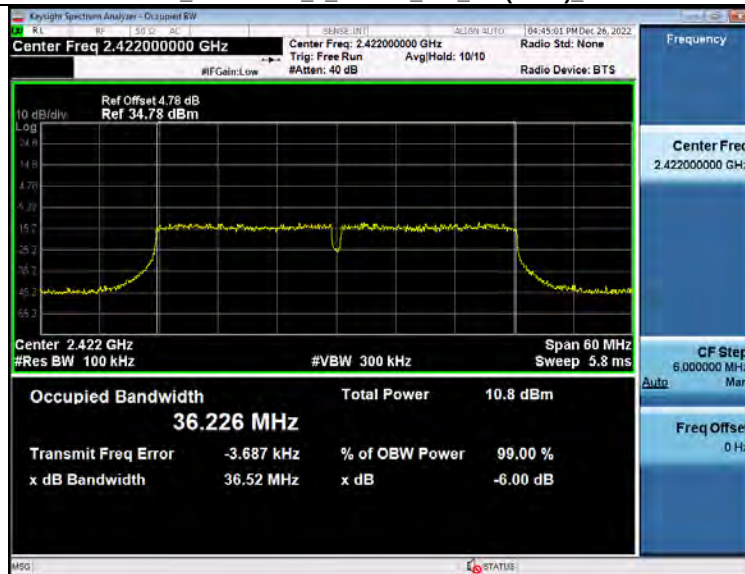

-6dB Bandwidth 2_4GWiFi_802_11n(HT40)_2437

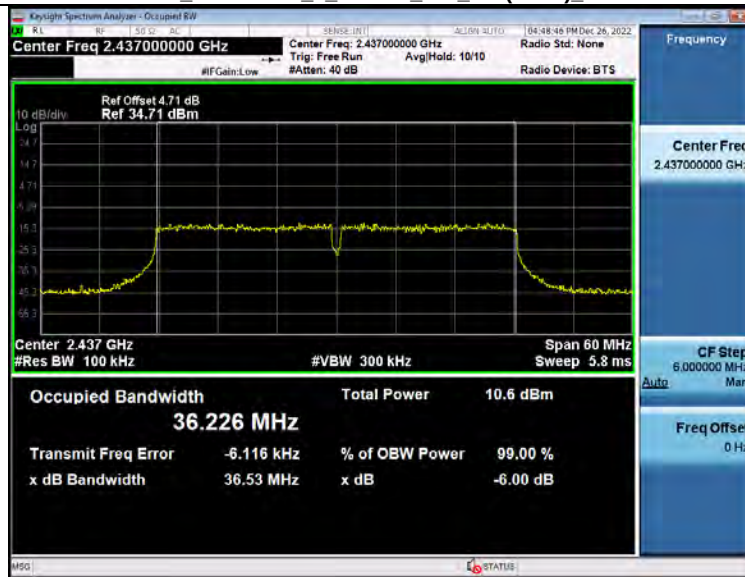


-6dB Bandwidth 2_4GWiFi_802_11n(HT40)_2452




11.2. BANDEGE

ANT1


1 Reference Level 2 4GWiFi 802 11b 2412

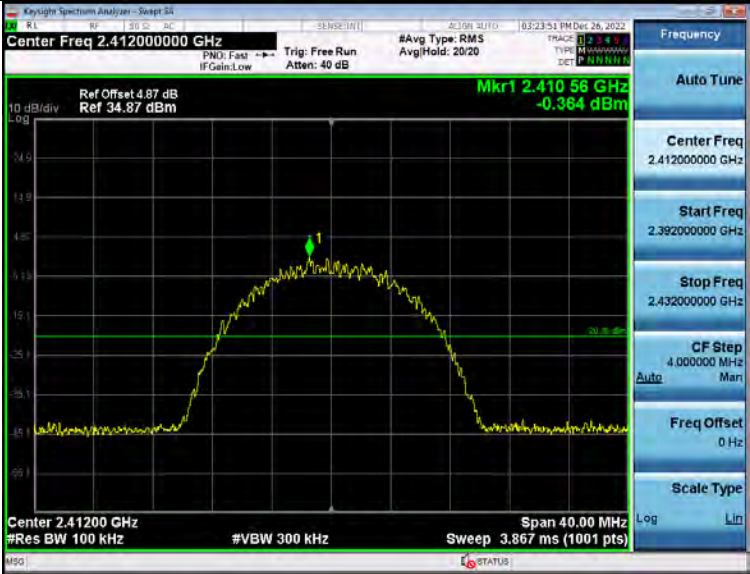


2 Bandedge 2 4GWiFi NVNT ANT1 802 11b 2412

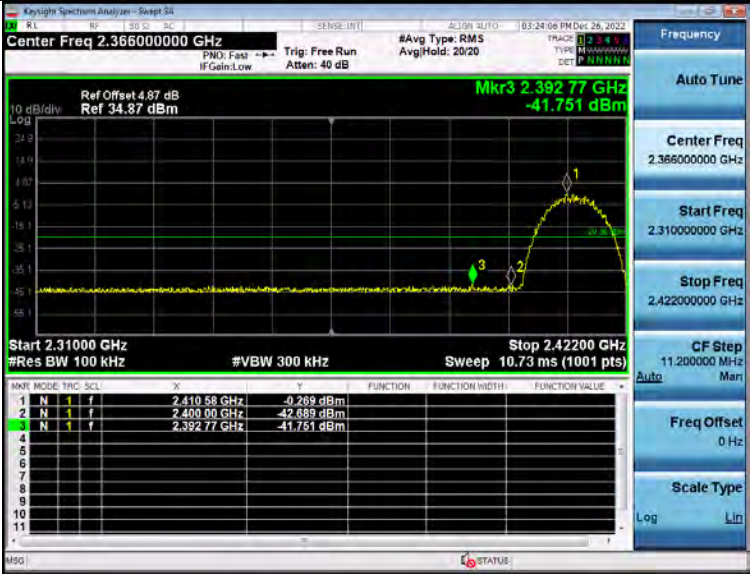


1 Reference Level 2 4GWiFi 802 11b 2462

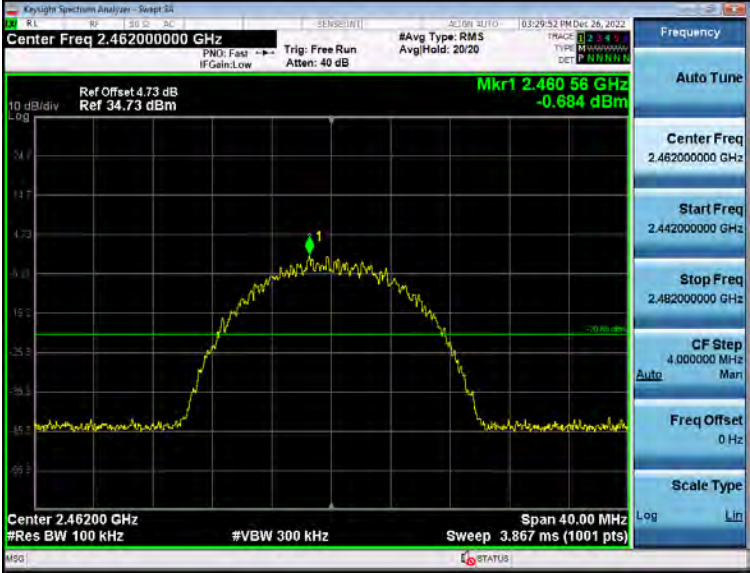


2_Bandedge_2_4GWiFi_NVNT_ANT1_802_11b_2462

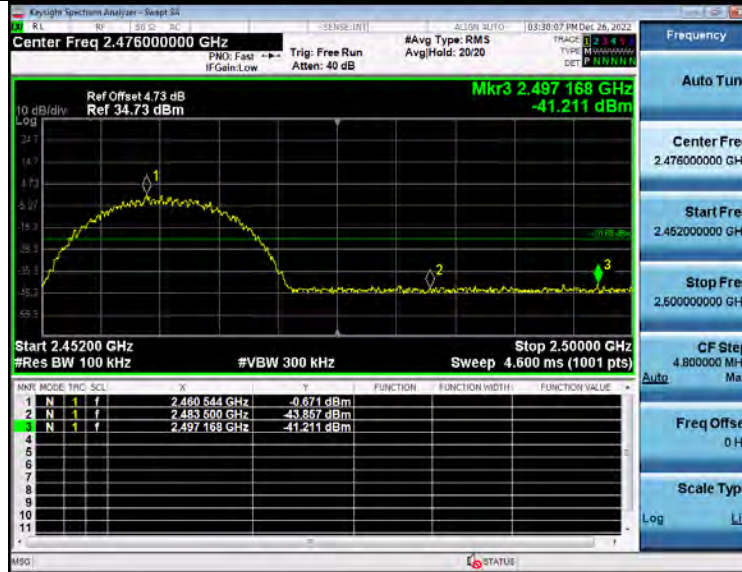


1_Reference_Level_2_4GWiFi_802_11g_2412

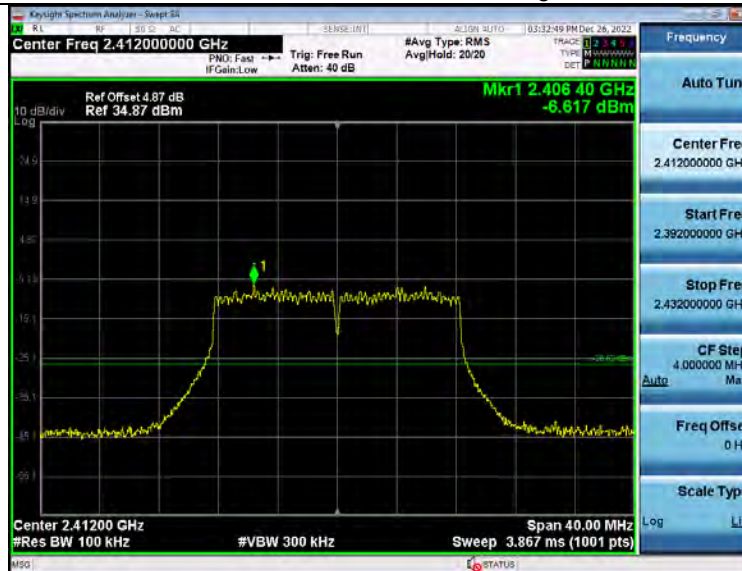


2_Bandedge_2_4GWiFi_NVNT_ANT1_802_11g_2412

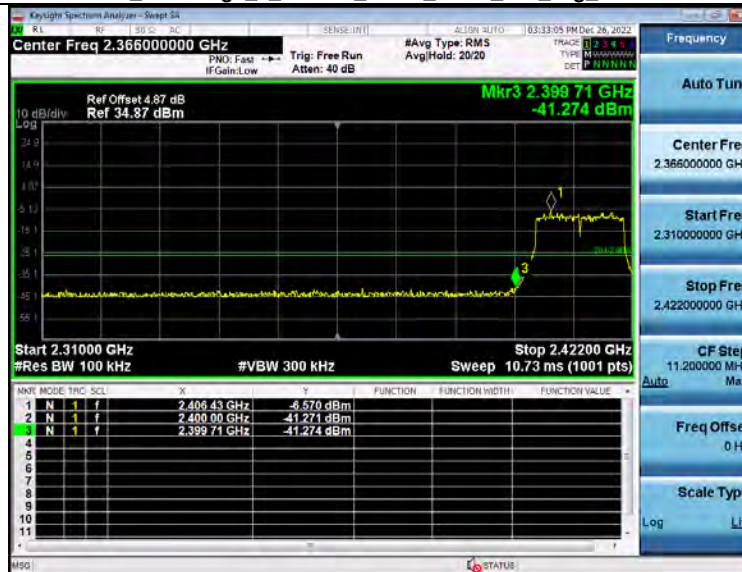


1_Reference_Level_2_4GWiFi_802_11g_2462

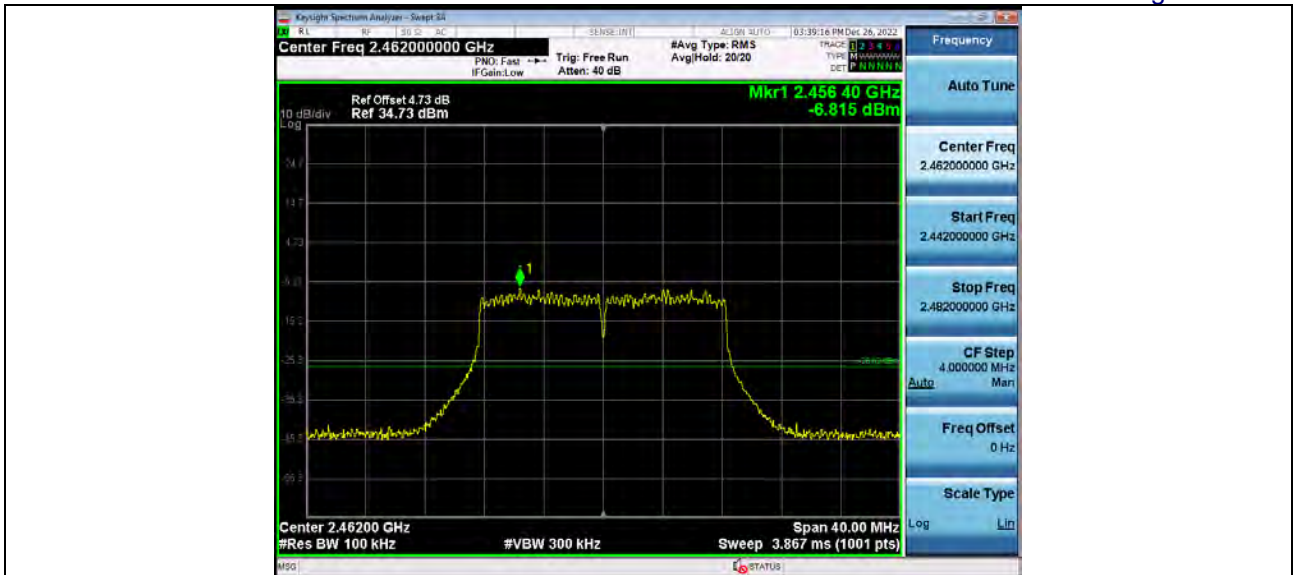


2_Bandedge 2_4GWiFi_NVNT_ANT1_802_11g_2462

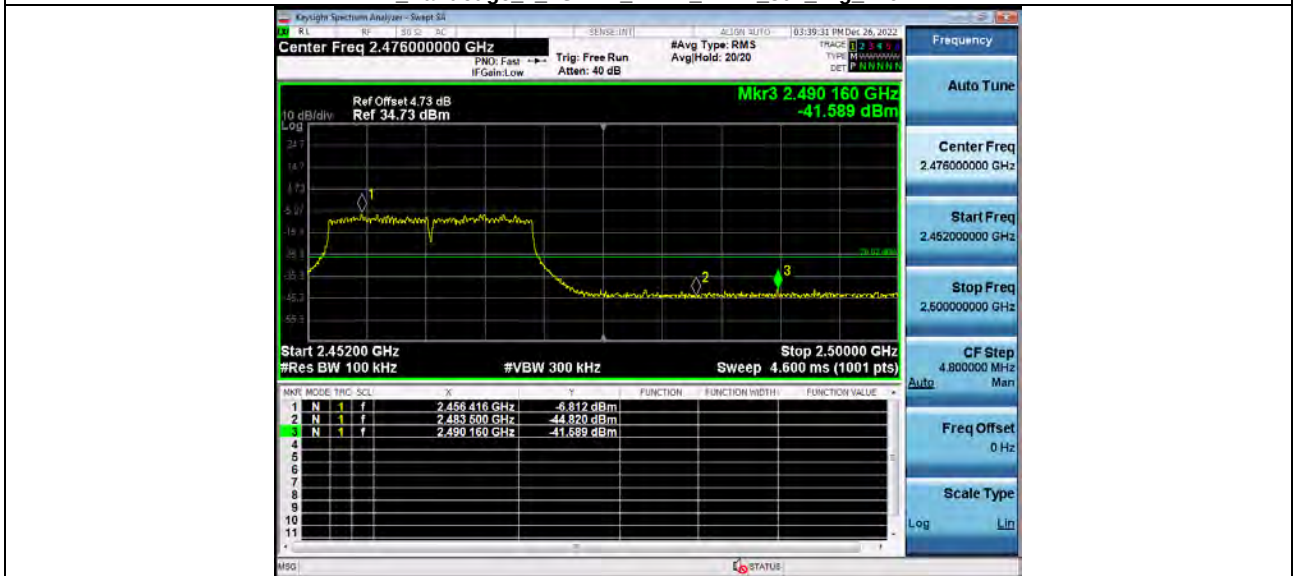


1_Reference Level 2_4GWiFi_802_11n(HT20)_2412

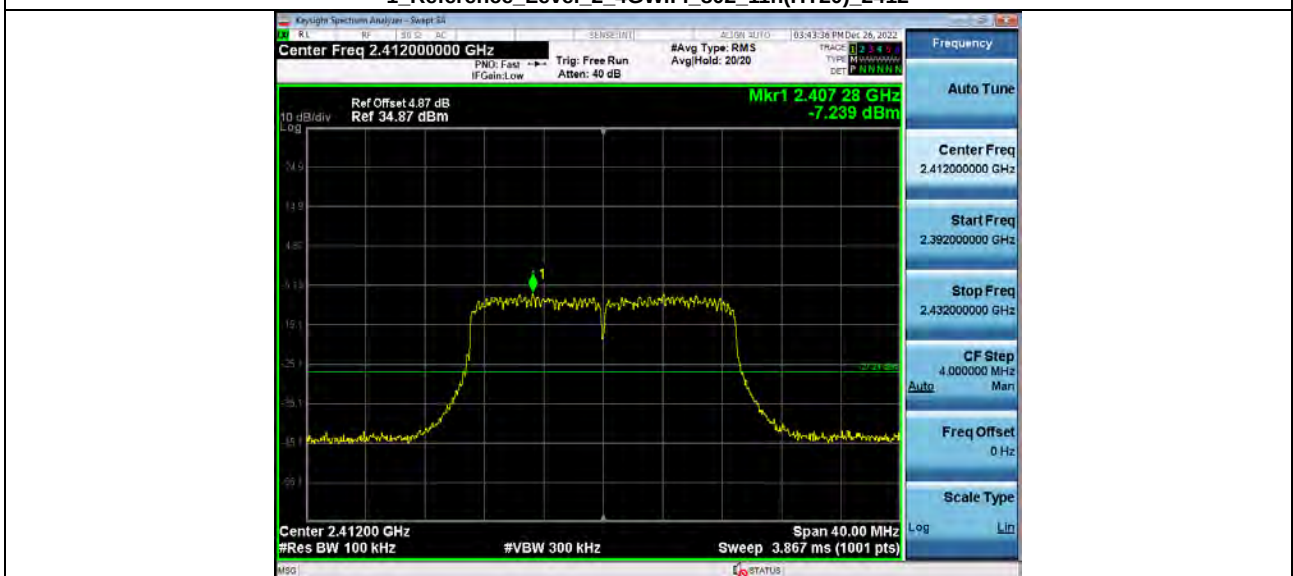

2_Bandedge 2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2412

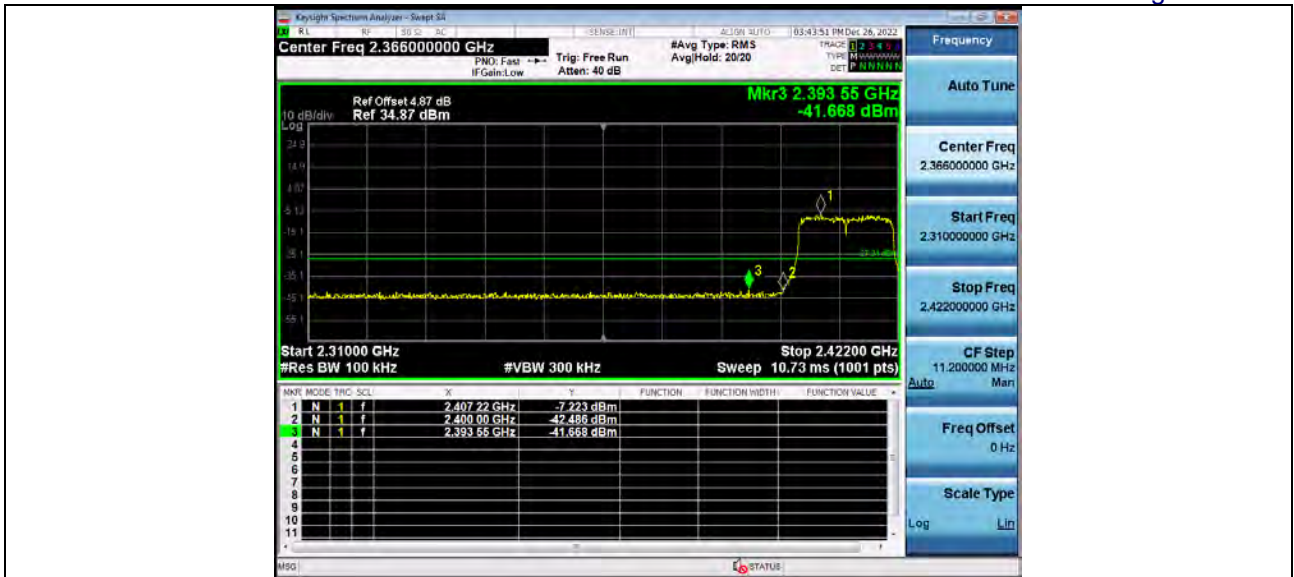


1 Reference Level 2 4GWiFi 802_11n(HT20) 2462

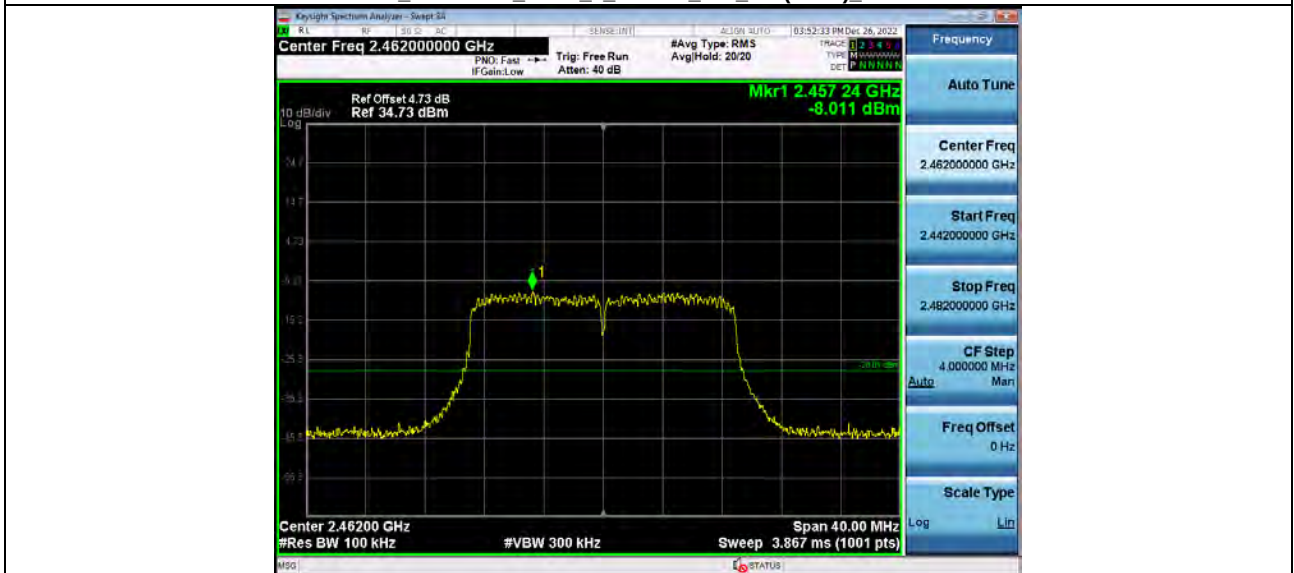


2 Bandedge 2 4GWiFi NVNT ANT1 802_11n(HT20) 2462



1 Reference Level 2 4GWiFi 802_11n(HT40) 2422

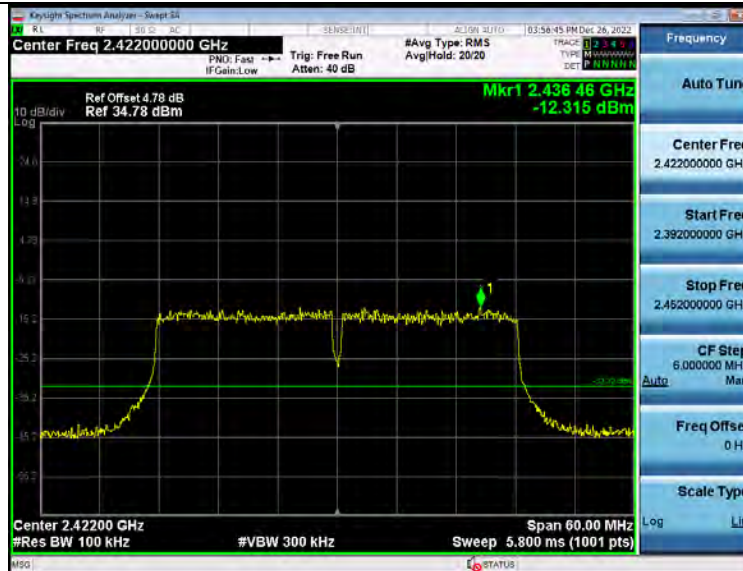

2_Bandedge 2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2422

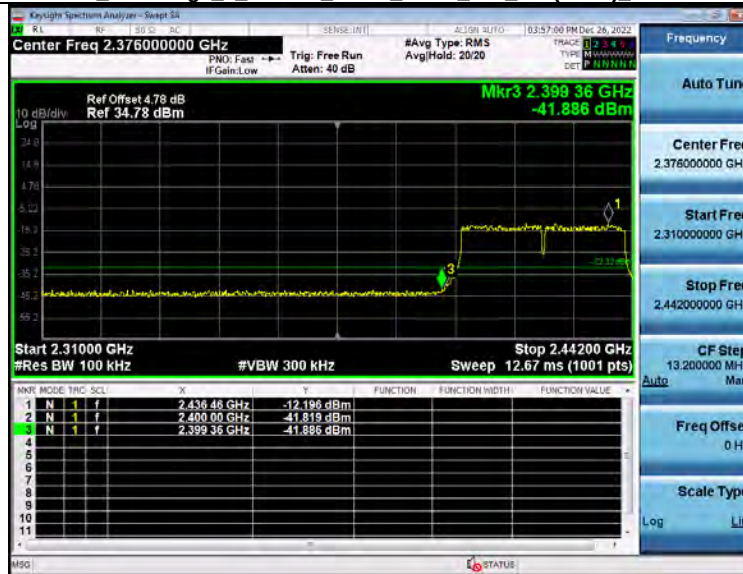

1_Reference_Level 2_4GWiFi_802_11n(HT40)_2452




2_Bandedge 2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2452



ANT2


1 Reference Level 2 4GWiF 802 11b 2412

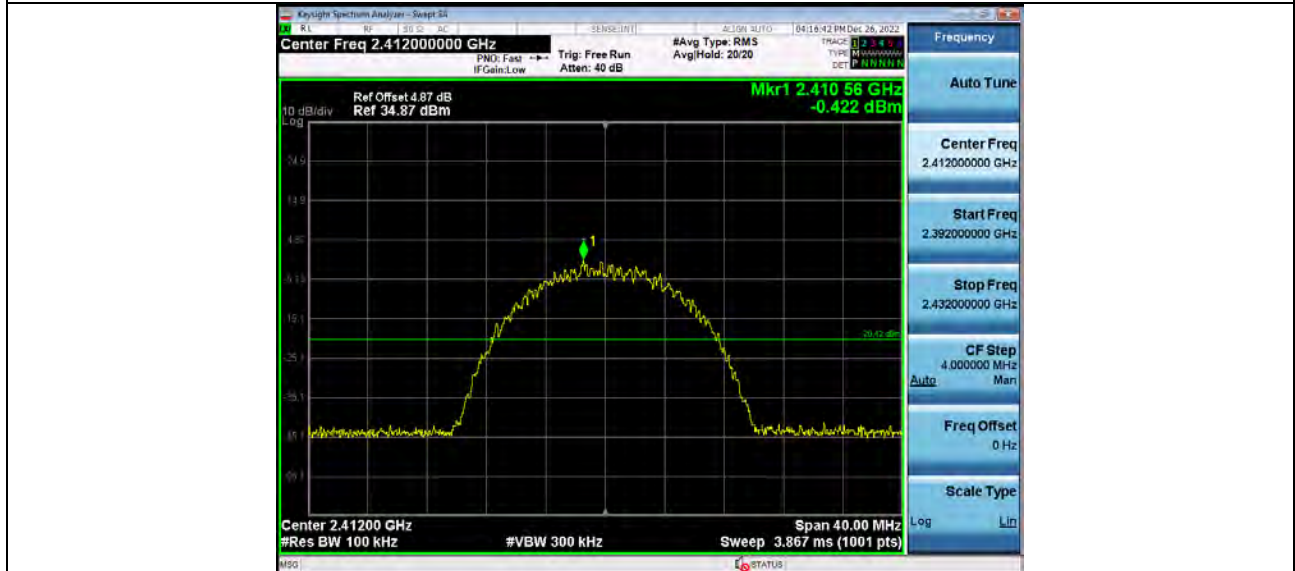

2 Bandedge 2 4GWiF NVNT_ANT1_802_11b_2412




1 Reference Level 2_4GWiFi 802_11b 2462

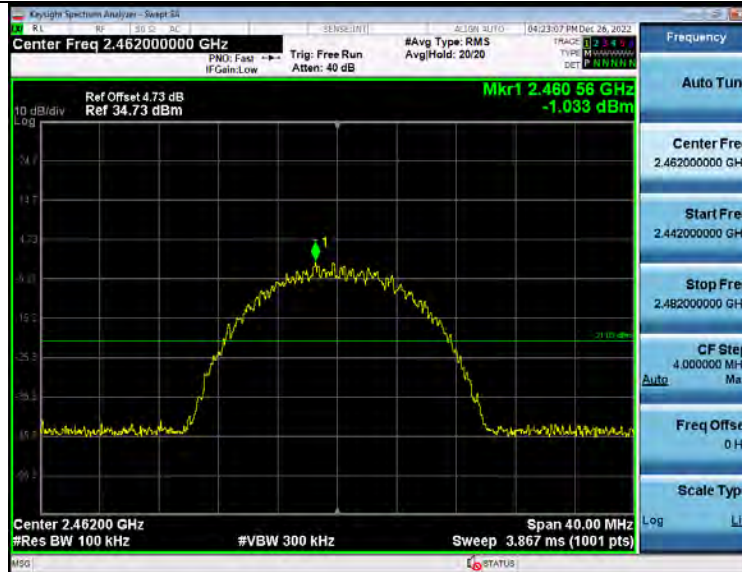


2 Bandedge 2_4GWiFi NVNT ANT1 802_11b 2462




1 Reference Level 2_4GWiFi 802_11g 2412

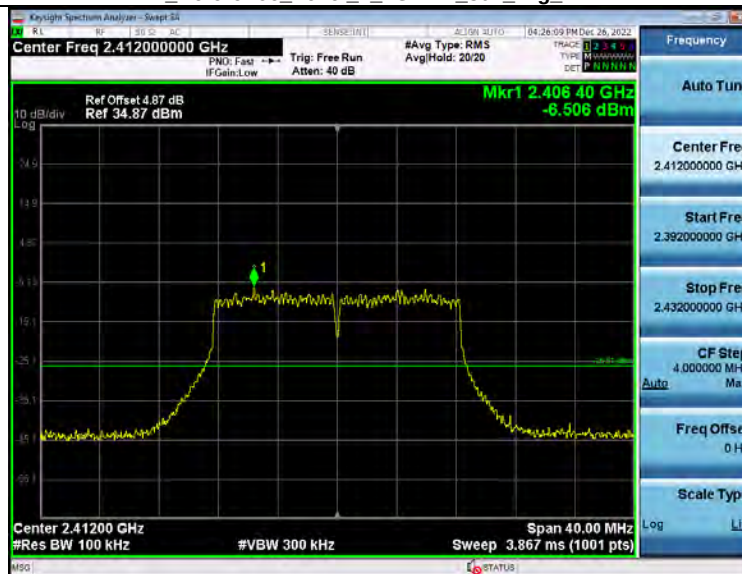


2 Bandedge 2_4GWiFi NVNT ANT1 802_11g 2412

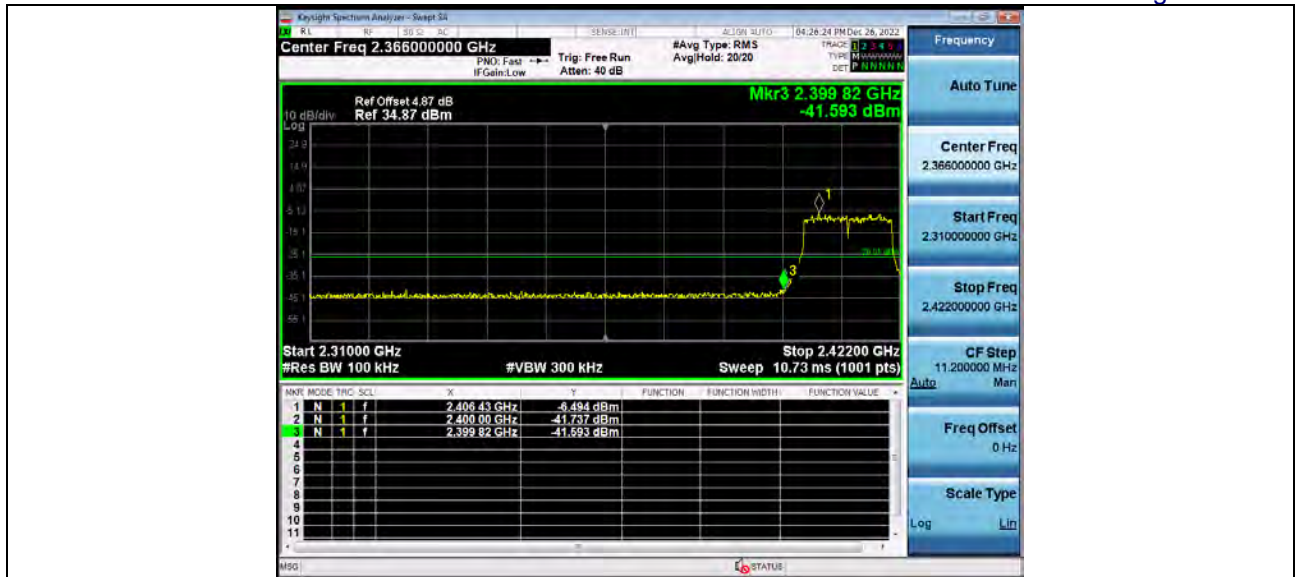


1 Reference Level 2 4GWiFi 802_11g 2462

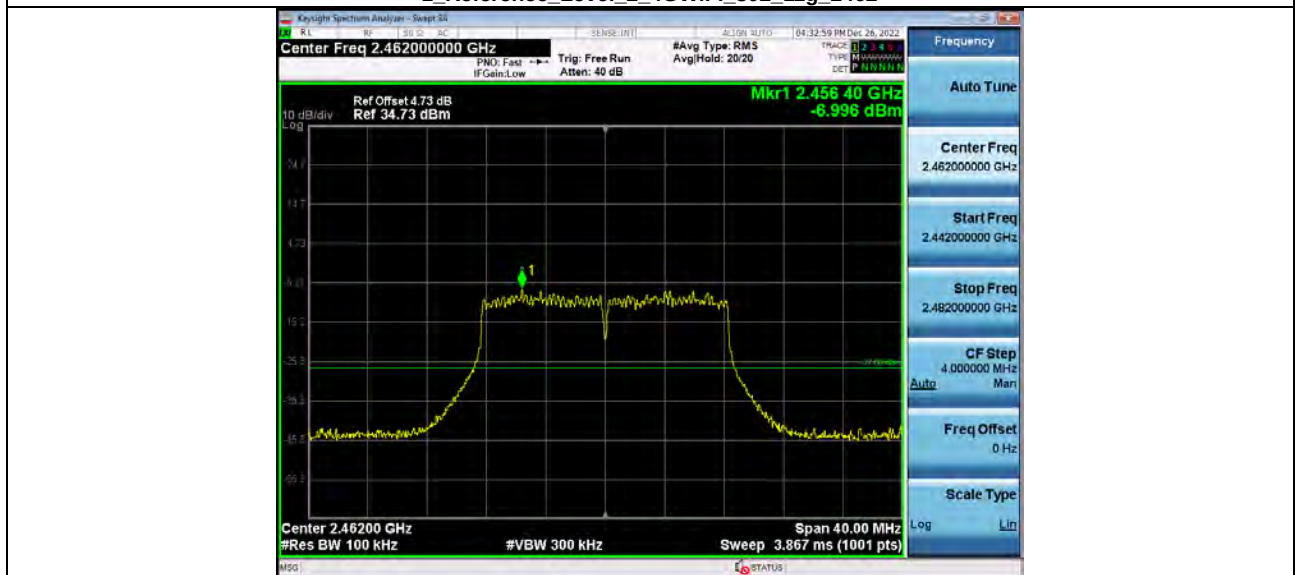


2 Bandedge 2 4GWiFi NVNT ANT1 802_11g 2462

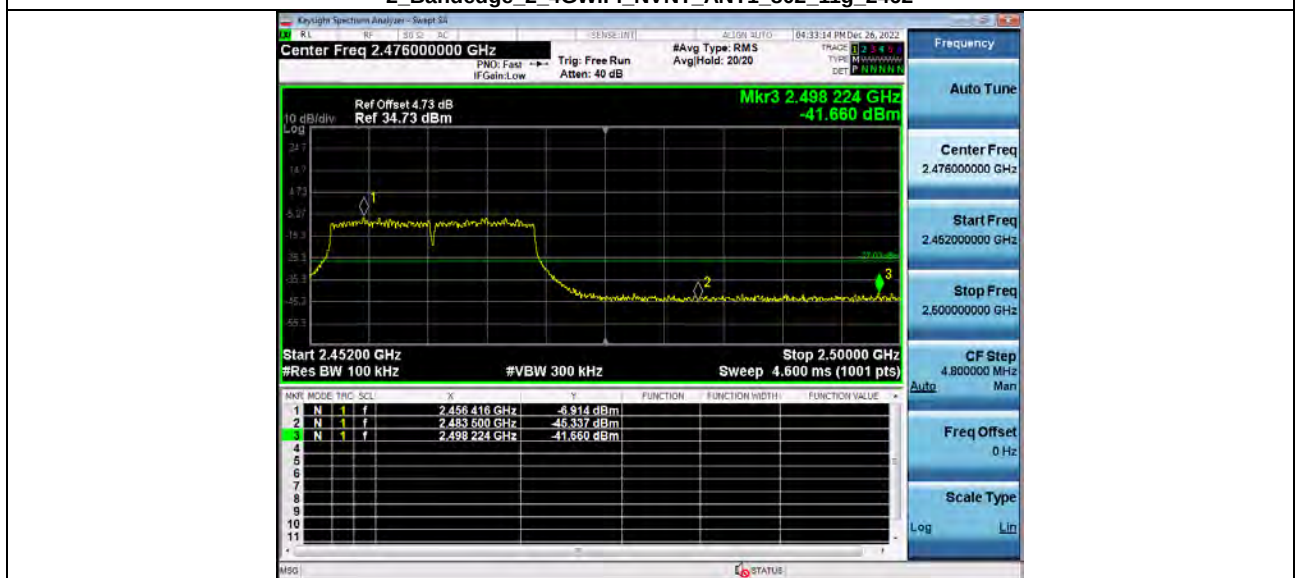

1 Reference Level 2 4GWiFi 802_11n(HT20) 2412

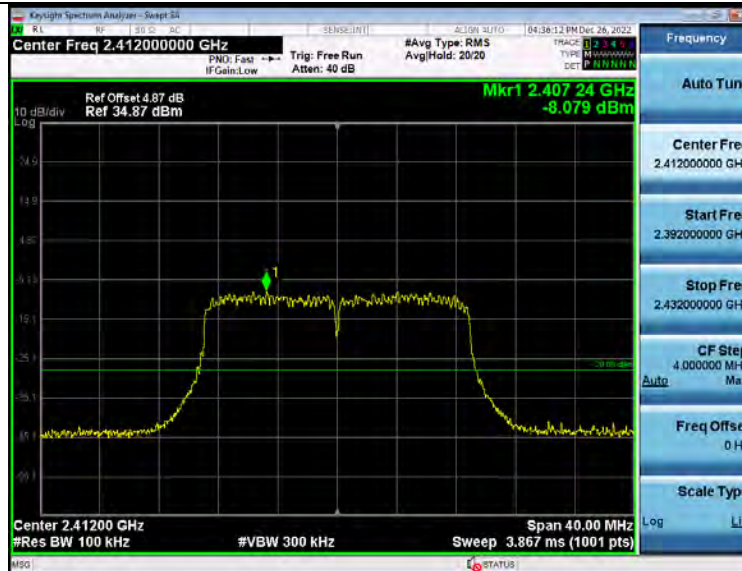


2_Bandedge 2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2412

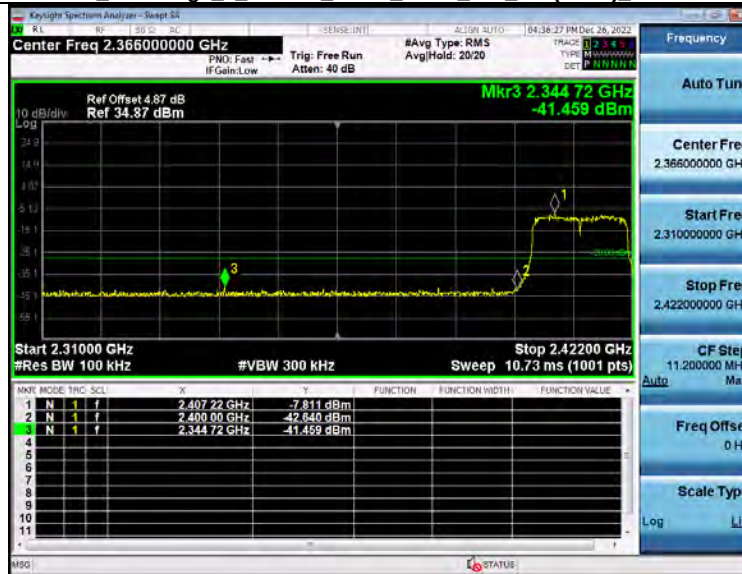


1_Reference_Level_2_4GWiFi_802_11n(HT20)_2462




2_Bandedge 2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2462

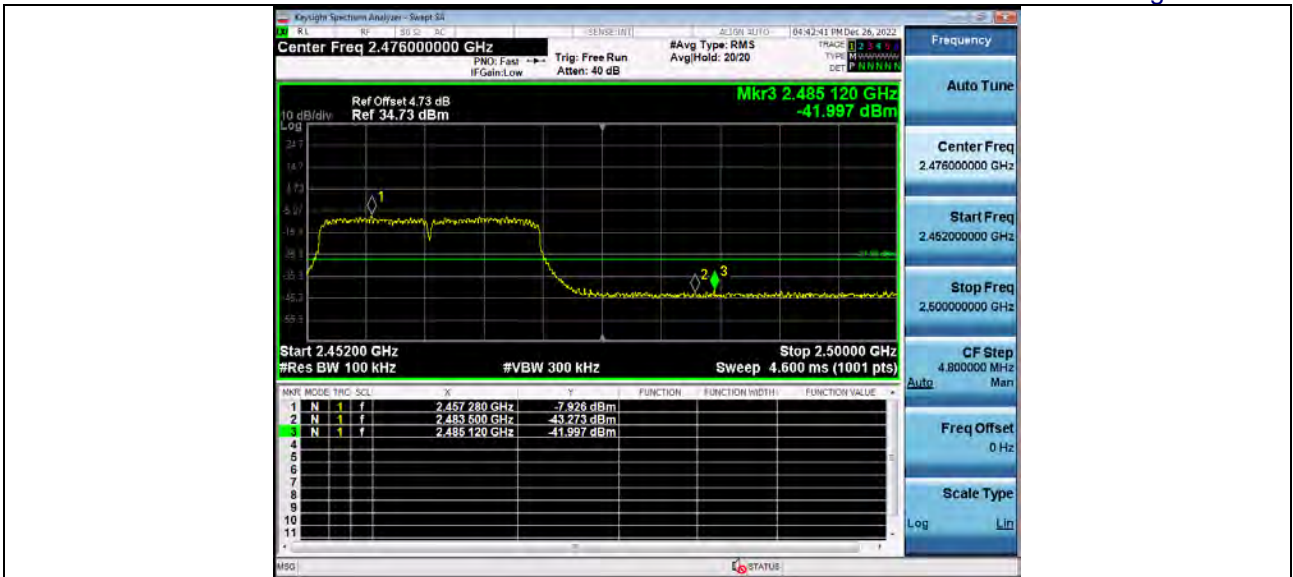


1 Reference Level 2 4GWiFi 802_11n(HT40) 2422

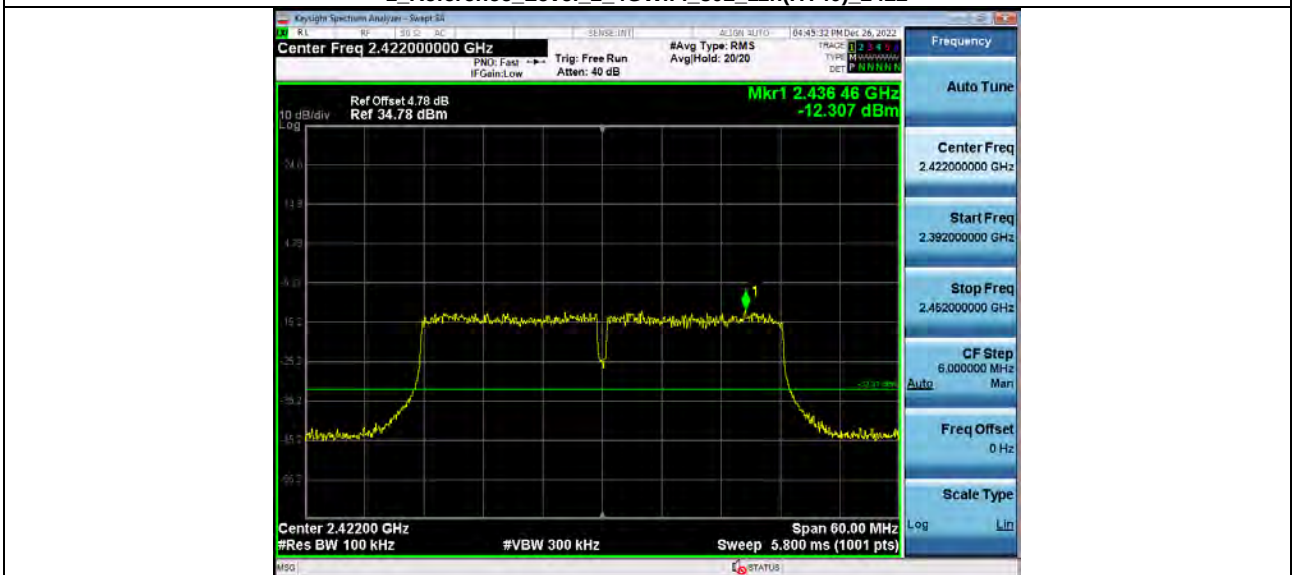


2 Bandedge 2 4GWiFi NVNT ANT1 802_11n(HT40) 2422

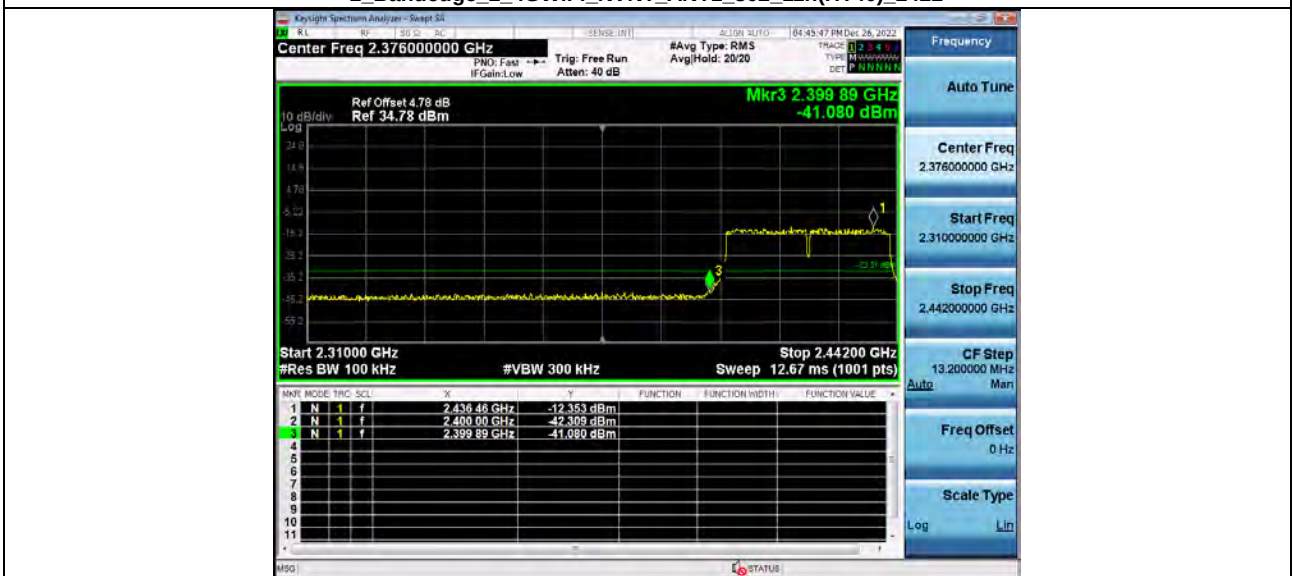

1 Reference Level 2 4GWiFi 802_11n(HT40) 2452

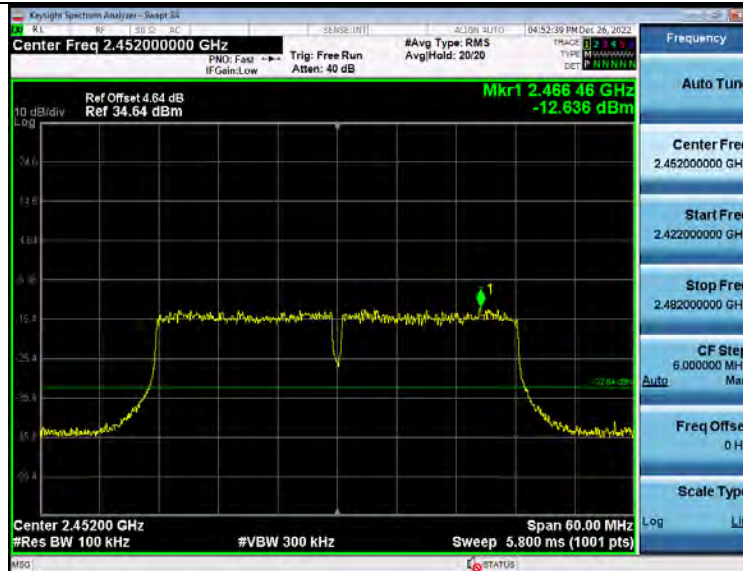

2_Bandedge 2 4GWiFi_NVNT ANT1 802 11n(HT40) 2452

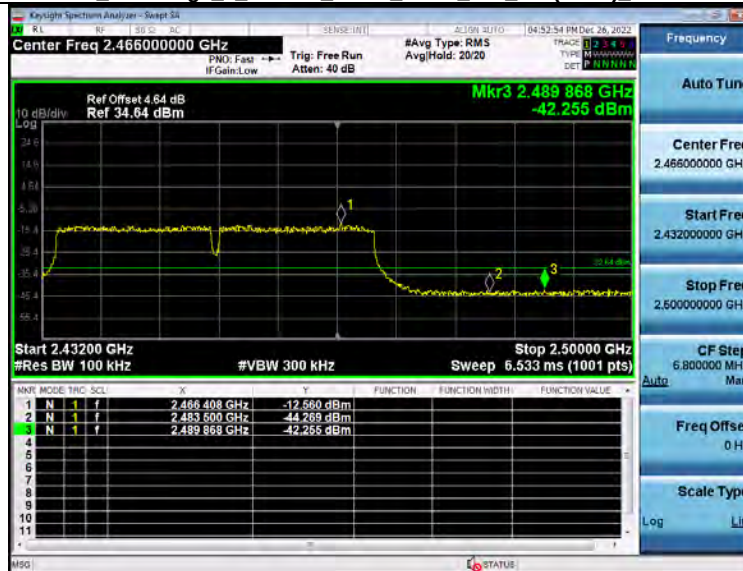

11.3. MAX. OUTPUT POWER

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	16.27	30	Pass
NVNT	ANT1	802.11b	2437.00	15.64	30	Pass
NVNT	ANT1	802.11b	2462.00	15.54	30	Pass
NVNT	ANT1	802.11g	2412.00	15.08	30	Pass
NVNT	ANT1	802.11g	2437.00	14.13	30	Pass
NVNT	ANT1	802.11g	2462.00	14.53	30	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	14.74	30	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	14.39	30	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	14.16	30	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	12.25	30	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	12.24	30	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	11.85	30	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT2	802.11b	2412.00	15.29	30	Pass
NVNT	ANT2	802.11b	2437.00	15.63	30	Pass
NVNT	ANT2	802.11b	2462.00	15.22	30	Pass
NVNT	ANT2	802.11g	2412.00	14.69	30	Pass
NVNT	ANT2	802.11g	2437.00	14.68	30	Pass
NVNT	ANT2	802.11g	2462.00	14.29	30	Pass
NVNT	ANT2	802.11n(HT20)	2412.00	14.44	30	Pass
NVNT	ANT2	802.11n(HT20)	2437.00	14.24	30	Pass
NVNT	ANT2	802.11n(HT20)	2462.00	14.02	30	Pass
NVNT	ANT2	802.11n(HT40)	2422.00	12.34	30	Pass
NVNT	ANT2	802.11n(HT40)	2437.00	12.53	30	Pass
NVNT	ANT2	802.11n(HT40)	2452.00	12.43	30	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	MIMO	802.11n(HT20)	2412.00	17.60	30	Pass
NVNT	MIMO	802.11n(HT20)	2437.00	17.33	30	Pass
NVNT	MIMO	802.11n(HT20)	2462.00	17.10	30	Pass
NVNT	MIMO	802.11n(HT40)	2422.00	15.31	30	Pass
NVNT	MIMO	802.11n(HT40)	2437.00	15.40	30	Pass
NVNT	MIMO	802.11n(HT40)	2452.00	15.16	30	Pass

Note: According to KDB 662911 D01, the number of antennas is less than 5, and the limit is unchanged.

11.4. POWER SPECTRAL DENSITY


Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/3kHz)	limit(dBm/3kHz)	Result
NVNT	ANT1	802.11b	2412.00	-14.33	8	Pass
NVNT	ANT1	802.11b	2437.00	-14.80	8	Pass
NVNT	ANT1	802.11b	2462.00	-15.03	8	Pass
NVNT	ANT1	802.11g	2412.00	-20.84	8	Pass
NVNT	ANT1	802.11g	2437.00	-21.46	8	Pass
NVNT	ANT1	802.11g	2462.00	-21.53	8	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	-21.60	8	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	-22.34	8	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	-22.68	8	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	-25.43	8	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	-24.85	8	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	-25.48	8	Pass

Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/3kHz)	limit(dBm/3kHz)	Result
NVNT	ANT2	802.11b	2412.00	-15.07	8	Pass
NVNT	ANT2	802.11b	2437.00	-15.06	8	Pass
NVNT	ANT2	802.11b	2462.00	-15.31	8	Pass
NVNT	ANT2	802.11g	2412.00	-21.19	8	Pass
NVNT	ANT2	802.11g	2437.00	-22.09	8	Pass
NVNT	ANT2	802.11g	2462.00	-21.49	8	Pass
NVNT	ANT2	802.11n(HT20)	2412.00	-22.41	8	Pass
NVNT	ANT2	802.11n(HT20)	2437.00	-22.10	8	Pass
NVNT	ANT2	802.11n(HT20)	2462.00	-22.42	8	Pass
NVNT	ANT2	802.11n(HT40)	2422.00	-25.27	8	Pass
NVNT	ANT2	802.11n(HT40)	2437.00	-25.81	8	Pass
NVNT	ANT2	802.11n(HT40)	2452.00	-25.75	8	Pass


Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/3kHz)	limit(dBm/3kHz)	Result
NVNT	ANT2	802.11n(HT20)	2412.00	-18.98	7.35	Pass
NVNT	ANT2	802.11n(HT20)	2437.00	-19.21	7.35	Pass
NVNT	ANT2	802.11n(HT20)	2462.00	-19.54	7.35	Pass
NVNT	ANT2	802.11n(HT40)	2422.00	-22.34	7.35	Pass
NVNT	ANT2	802.11n(HT40)	2437.00	-22.29	7.35	Pass
NVNT	ANT2	802.11n(HT40)	2452.00	-22.60	7.35	Pass

Note: MIMO limit=limit-(6.65-6)=8-0.65=7.35 dBm/3kHz


ANT1

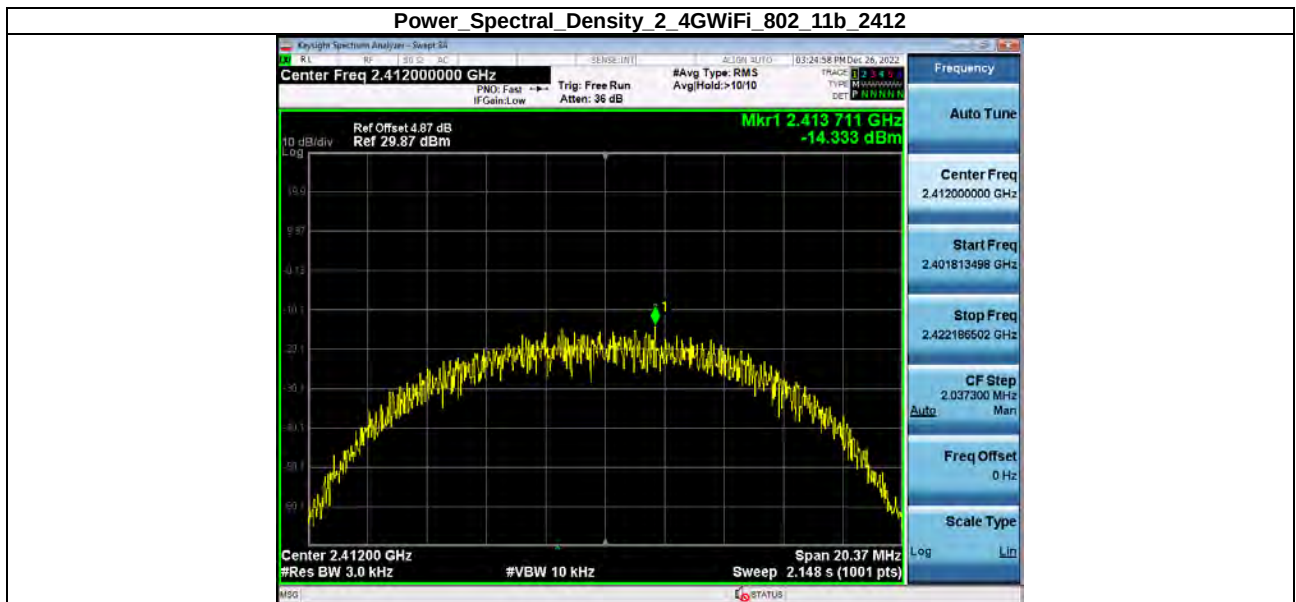


Power Spectral Density 2_4GWiFi_802_11b_2437

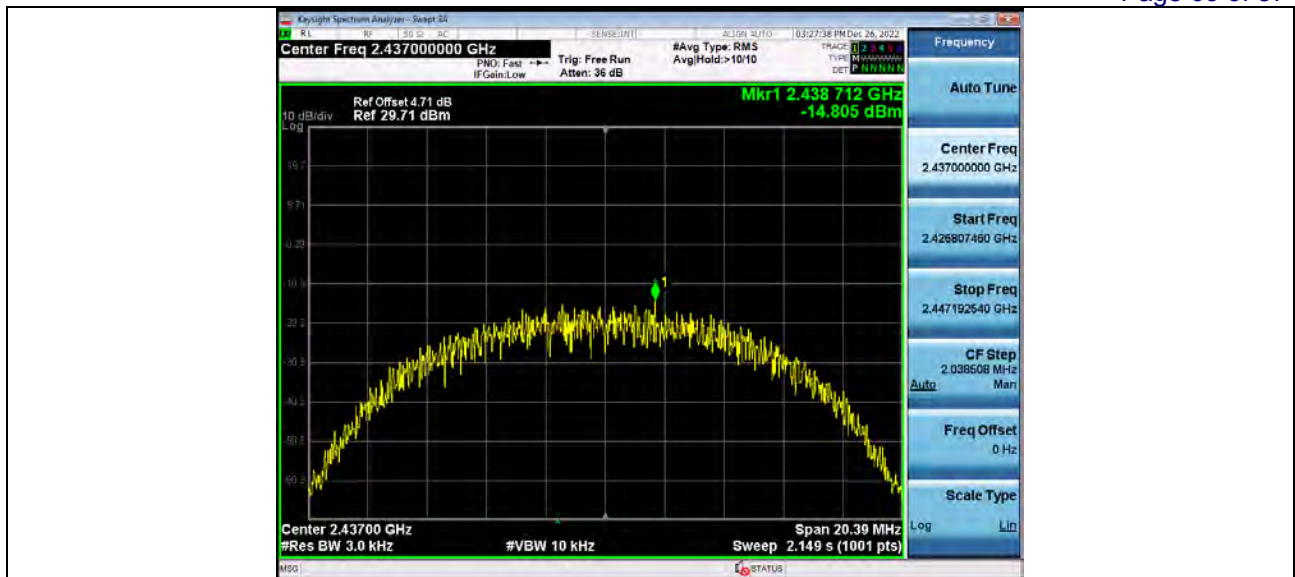


Power_Spectral_Density_2_4GWiFi_802_11b_2462

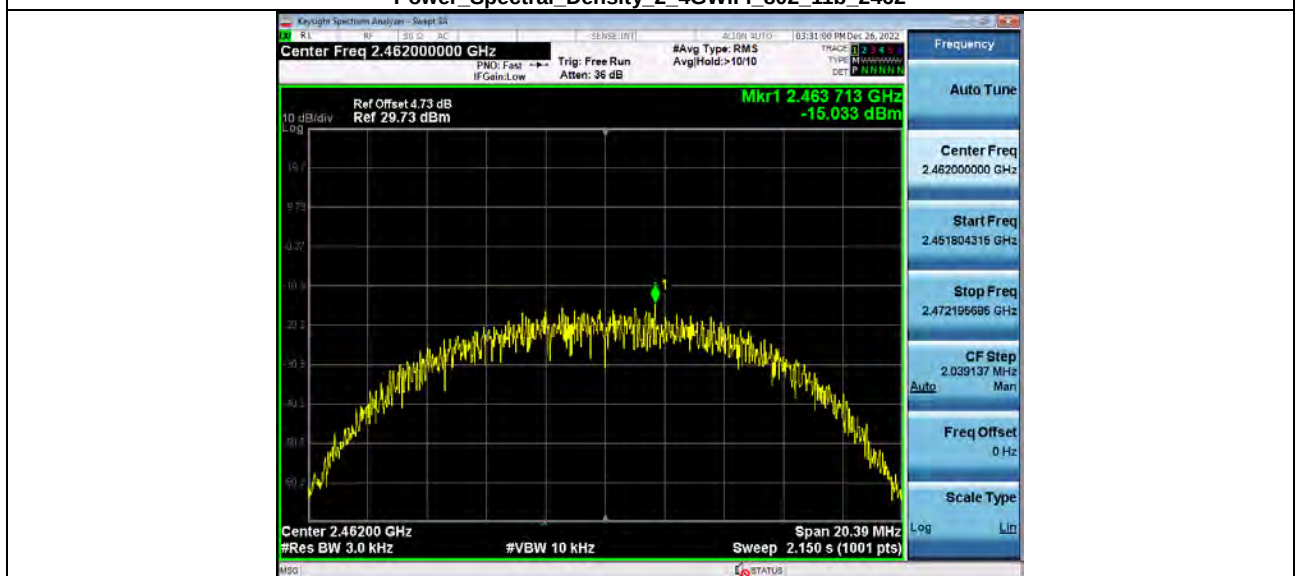


Power_Spectral_Density_2_4GWiFi_802_11g_2412

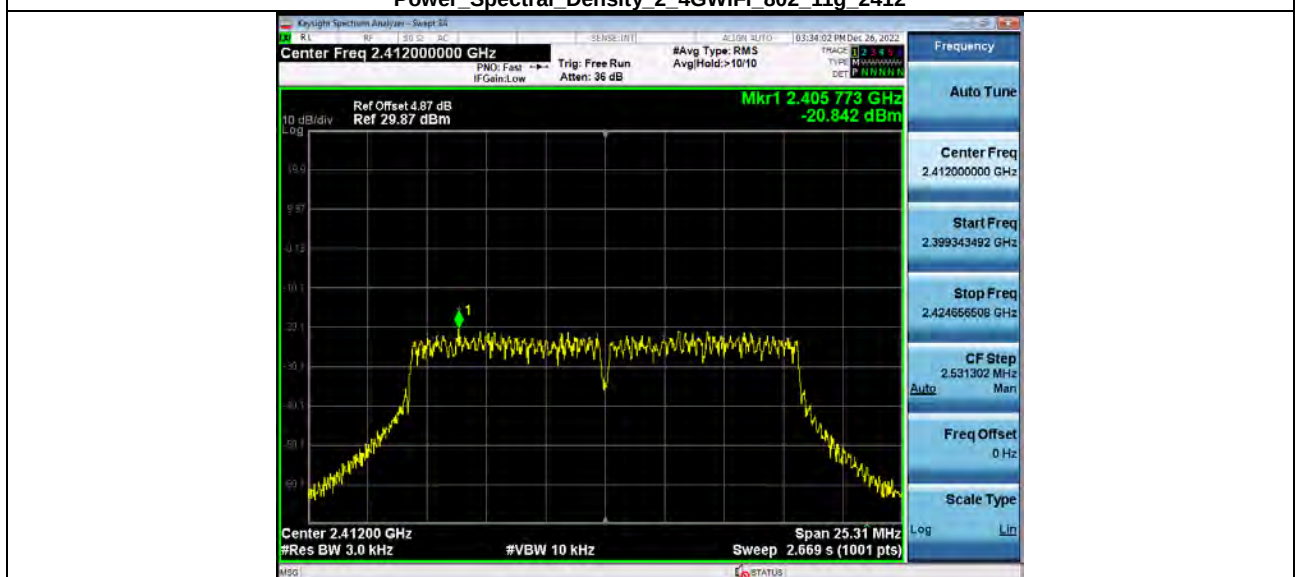


Power_Spectral_Density_2_4GWiFi_802_11g_2437

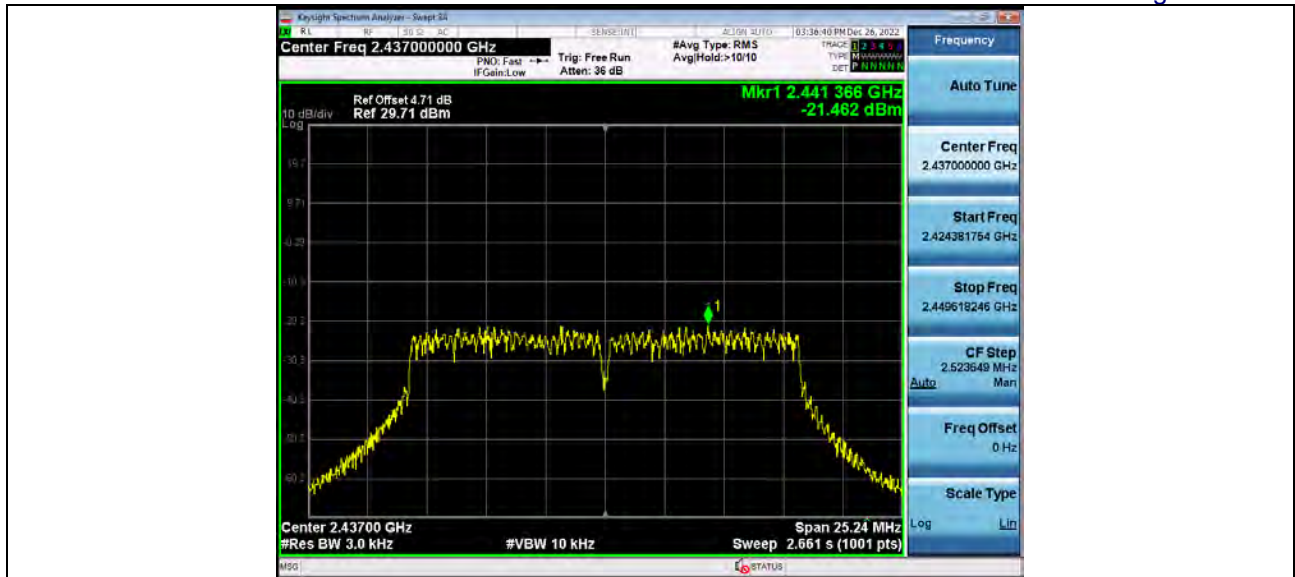


Power_Spectral_Density_2_4GWiFi_802_11g_2462

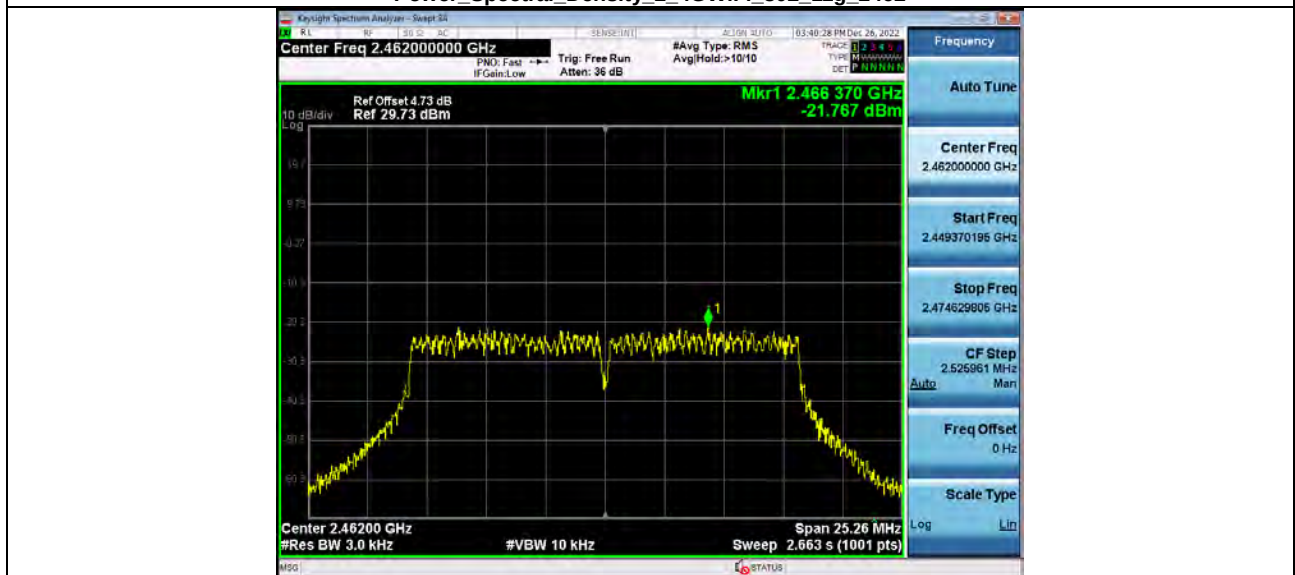


Power_Spectral_Density_2_4GWiFi_802_11n(HT20)_2412

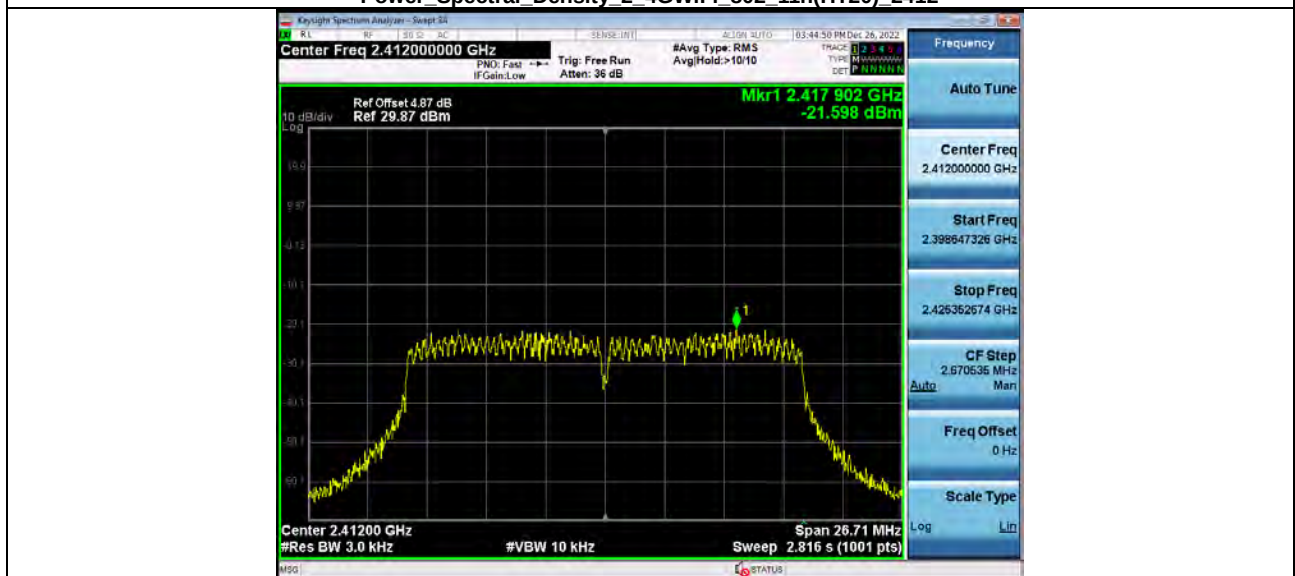


Power_Spectral_Density_2_4GWiFi_802_11n(HT20)_2437

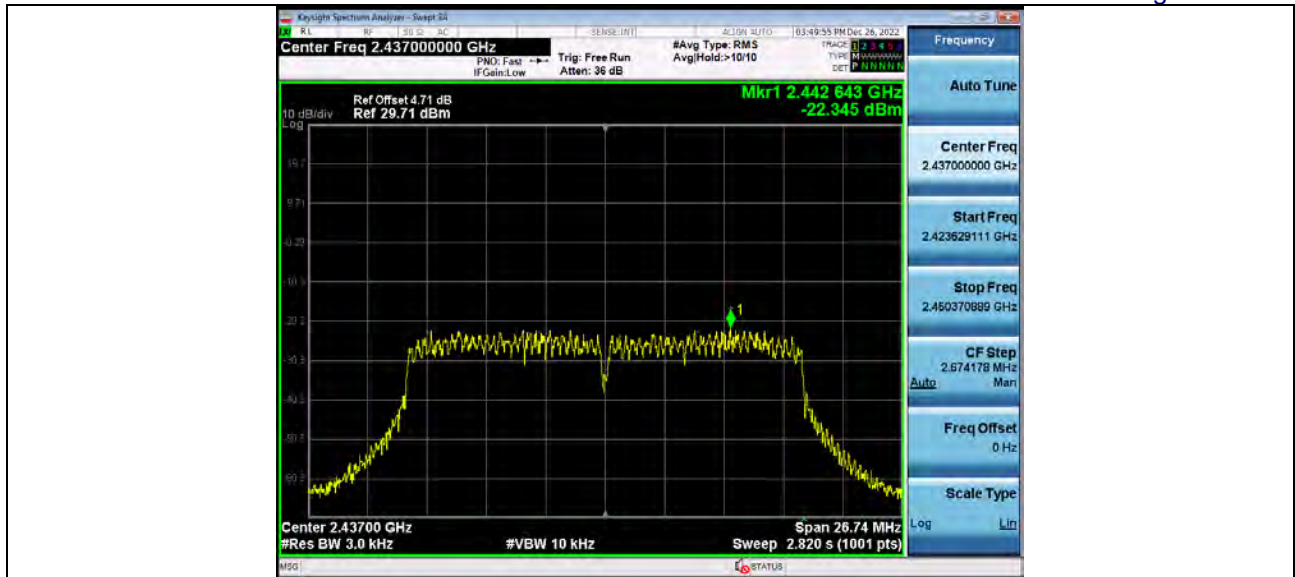


Power Spectral Density 2_4GWiFi_802_11n(HT20)_2462

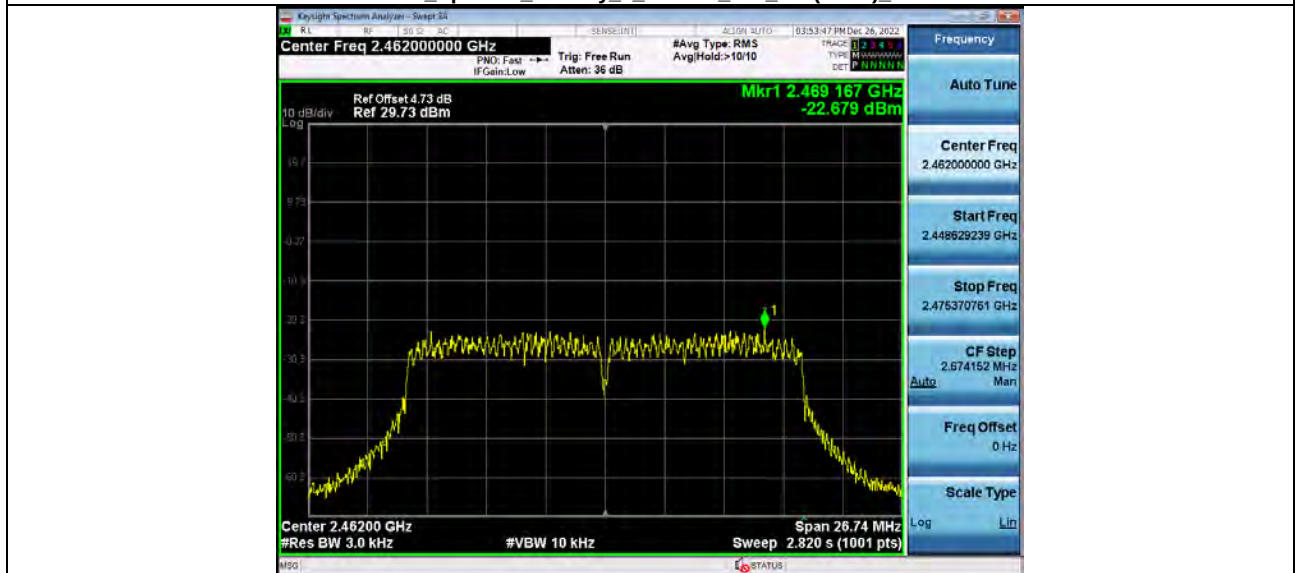


Power Spectral Density 2_4GWiFi_802_11n(HT40)_2422

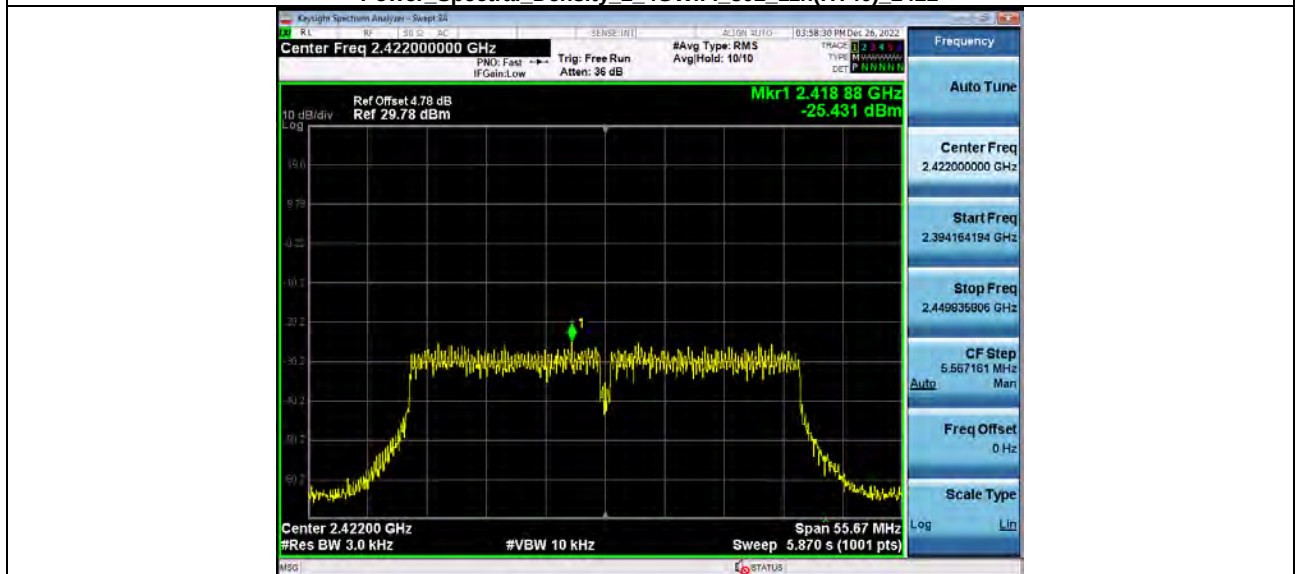

Power Spectral Density 2_4GWiFi_802_11n(HT40)_2437

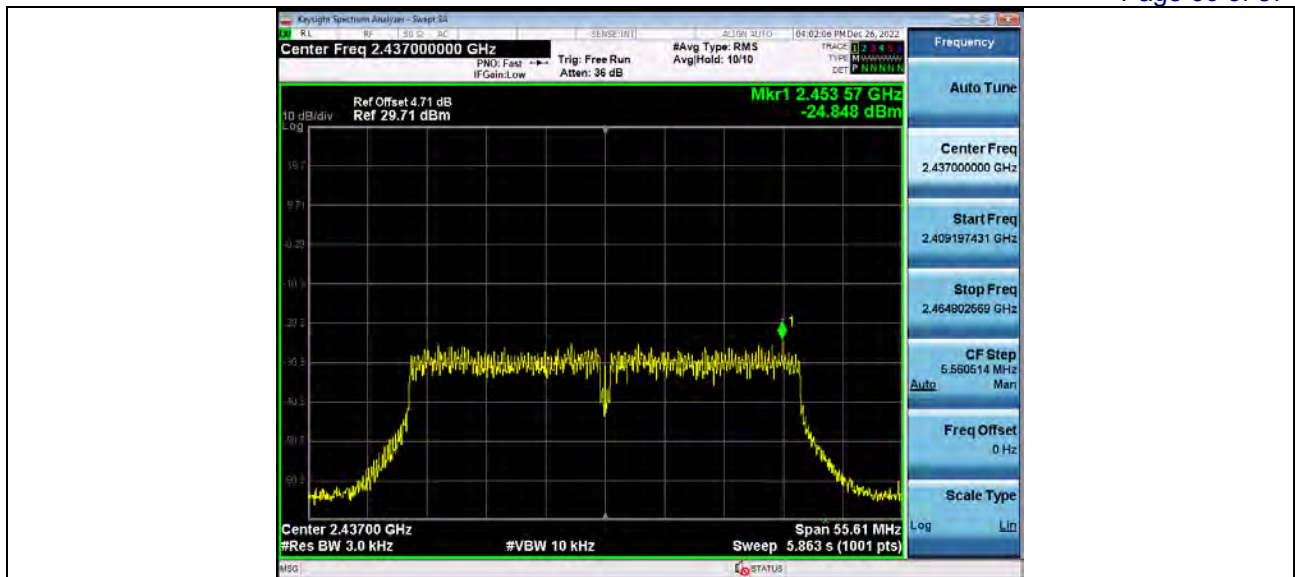


Power Spectral Density 2_4GWiFi_802_11n(HT40)_2452

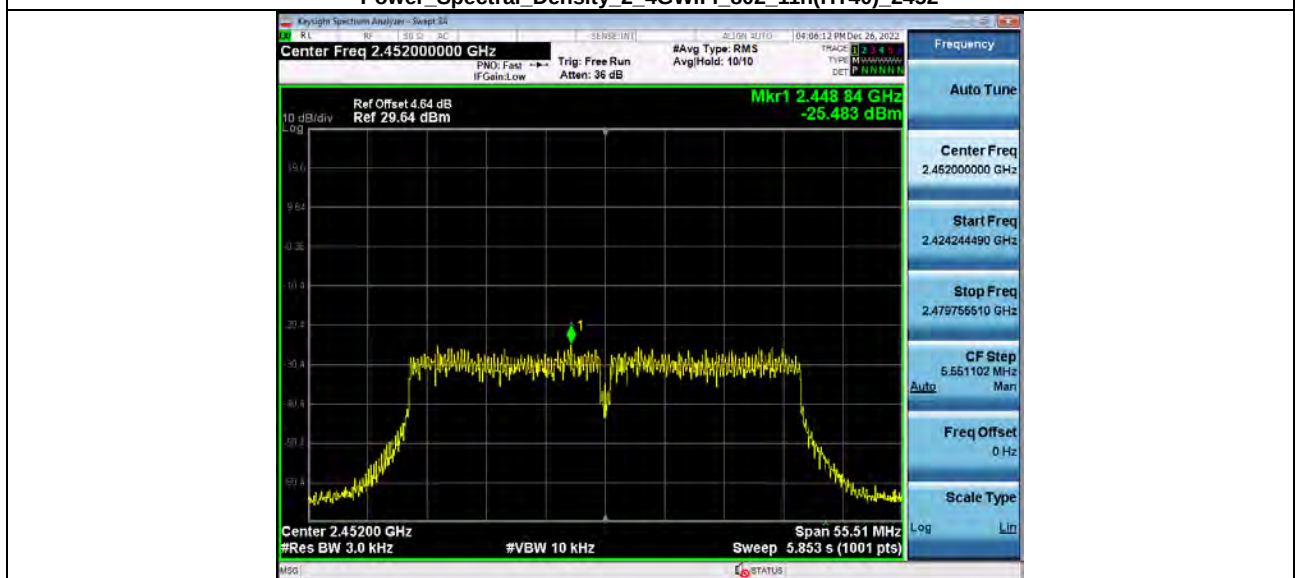


ANT2


Power Spectral Density 2_4GWiFi_802_11b_2412

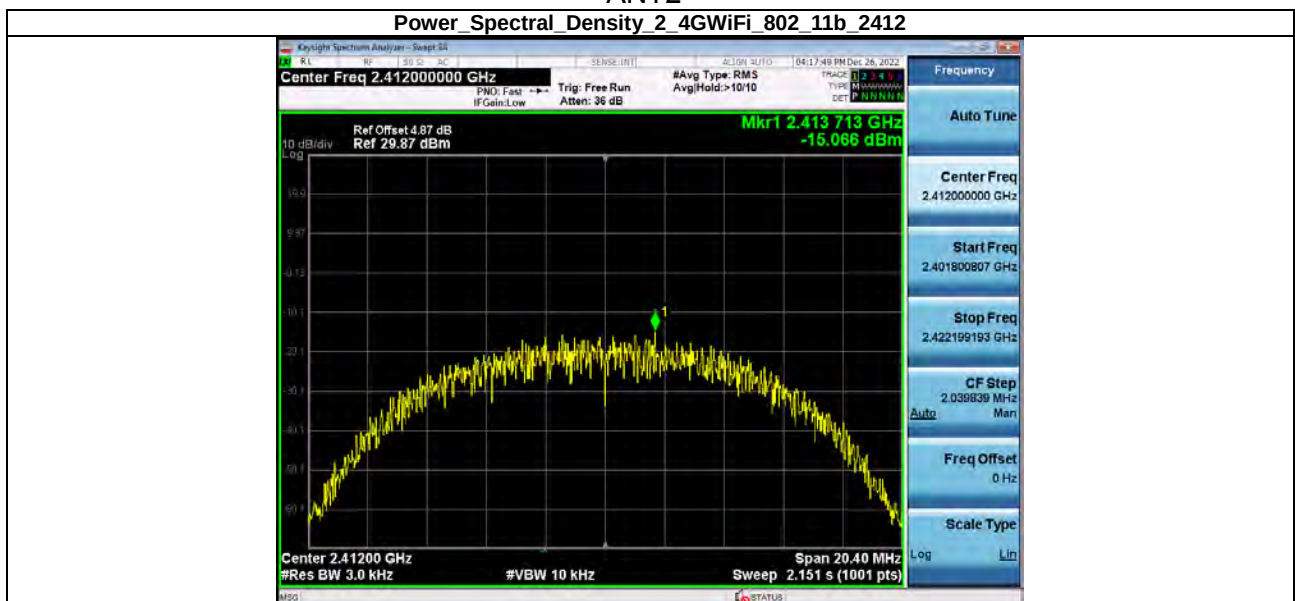


Power Spectral Density 2_4GWiFi_802_11b_2437

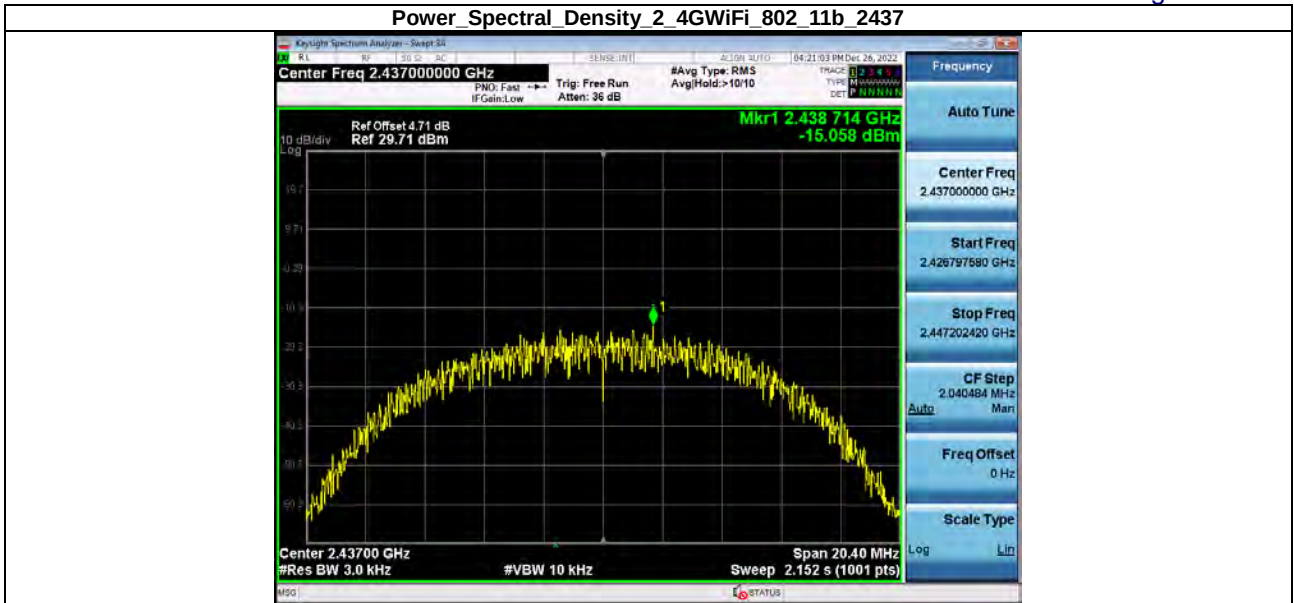


Power Spectral Density 2_4GWiFi_802_11b_2462

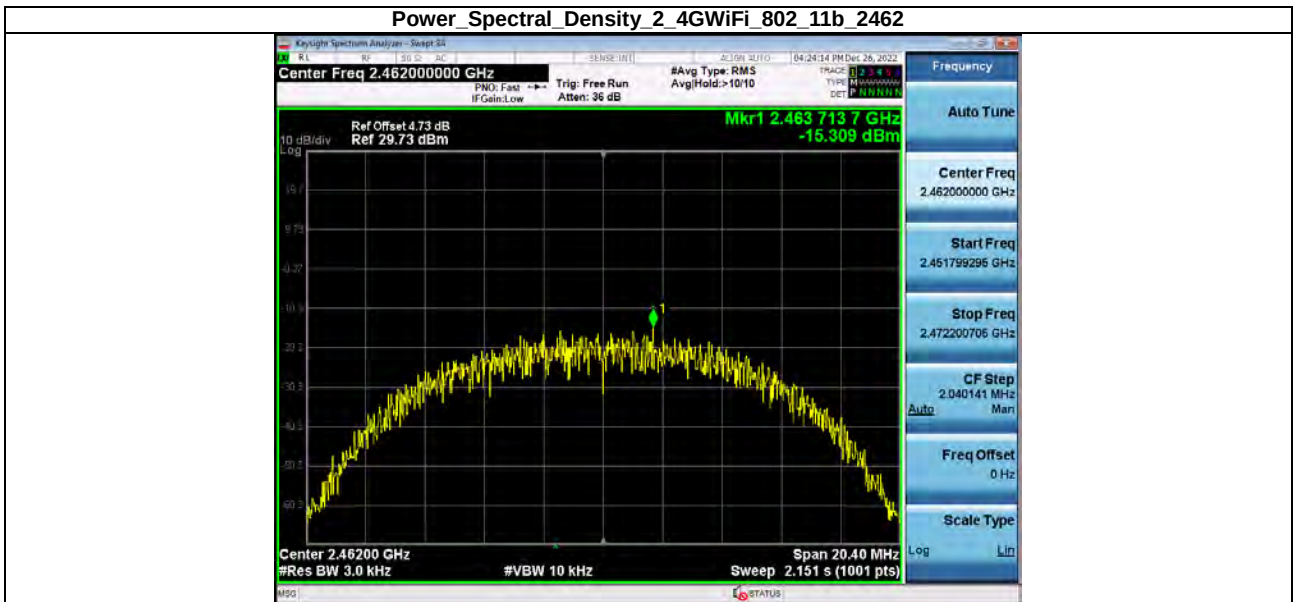


Power Spectral Density 2_4GWiFi_802_11g_2412

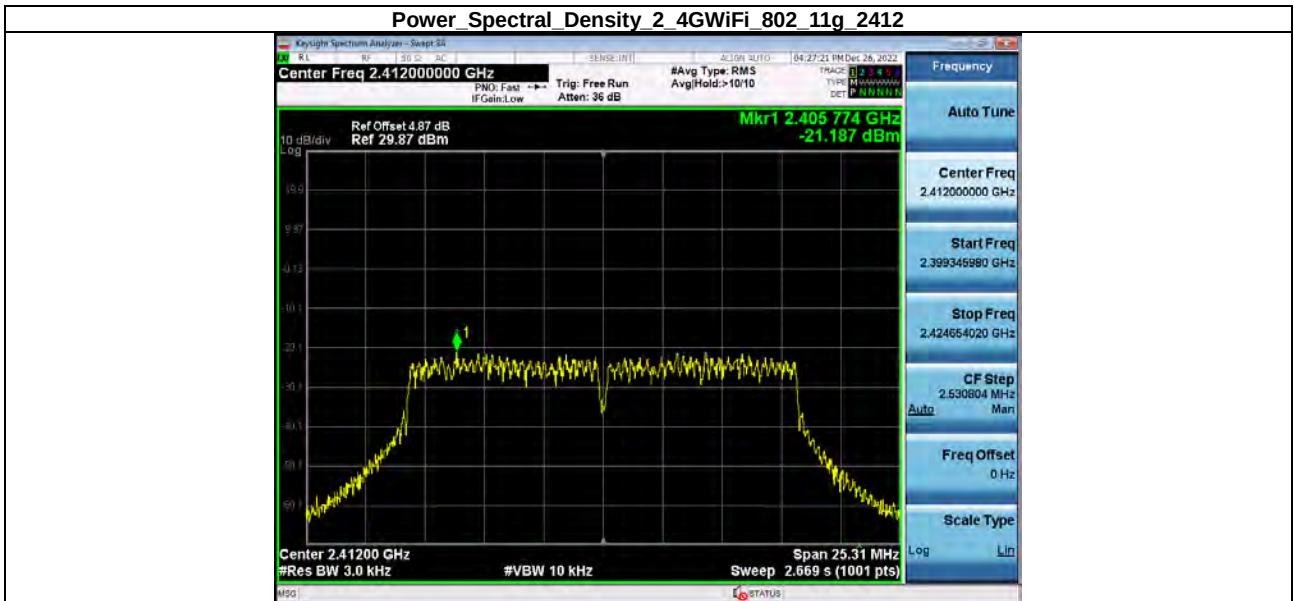


Power Spectral Density 2_4GWiFi 802_11g 2437

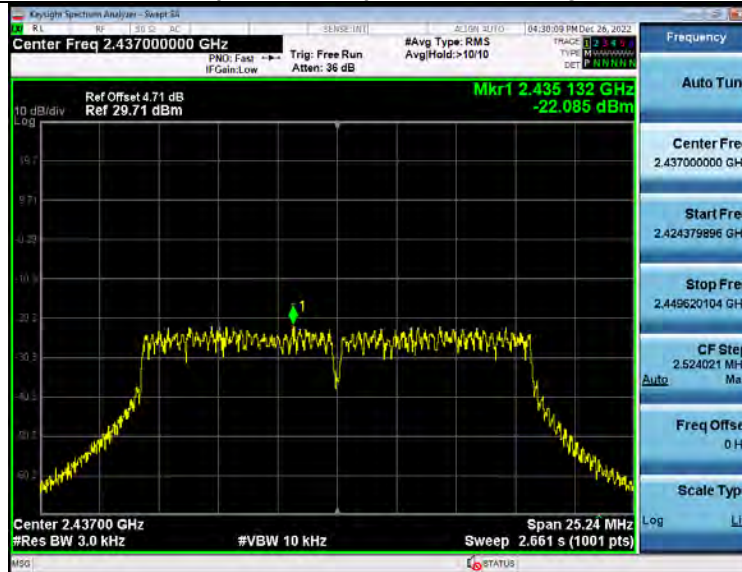


Power Spectral Density 2_4GWiFi 802_11g 2462

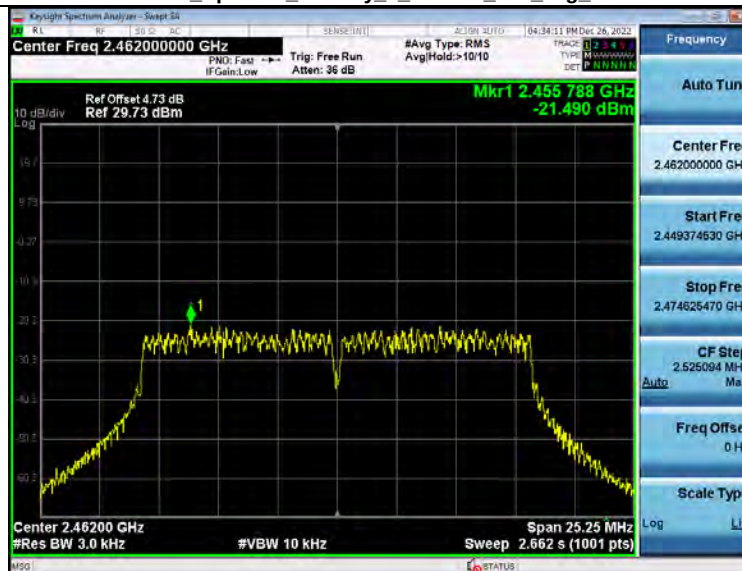


Power Spectral Density 2_4GWiFi 802_11n(HT20) 2412

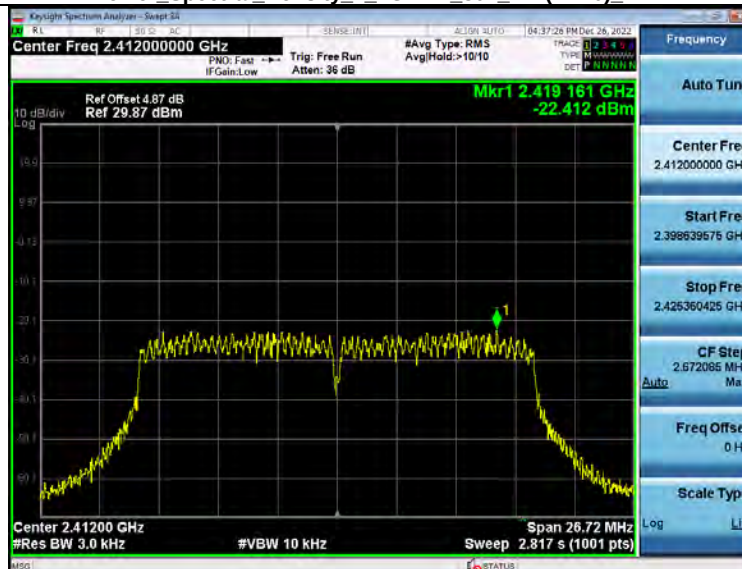

Power Spectral Density 2_4GWiFi_802_11n(HT20)_2437

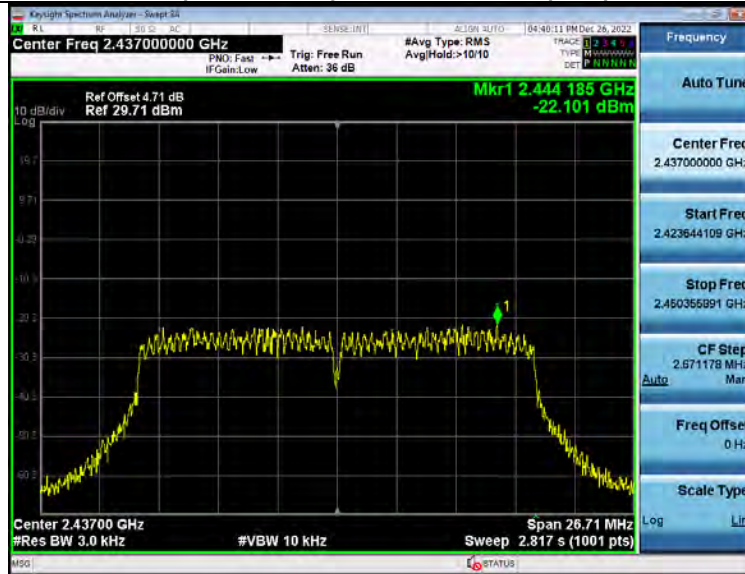


Power Spectral Density 2_4GWiFi_802_11n(HT20)_2462

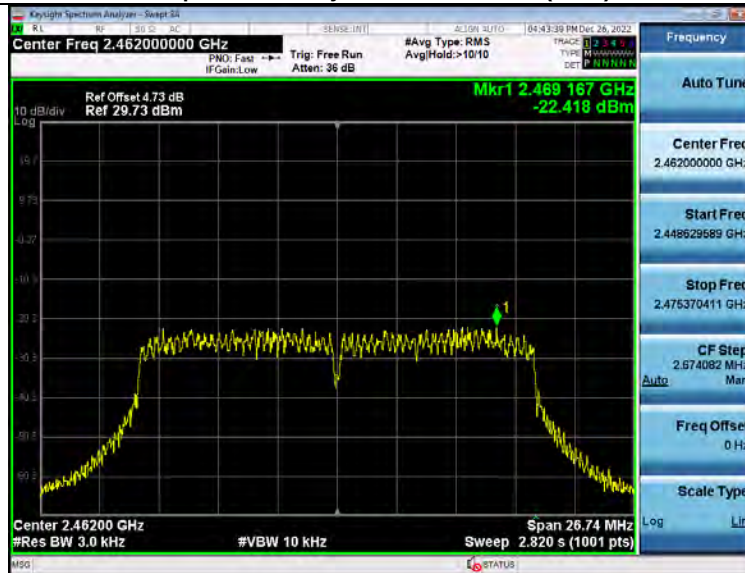


Power Spectral Density 2_4GWiFi_802_11n(HT40)_2422



Power Spectral Density 2_4GWiFi_802_11n(HT40)_2437

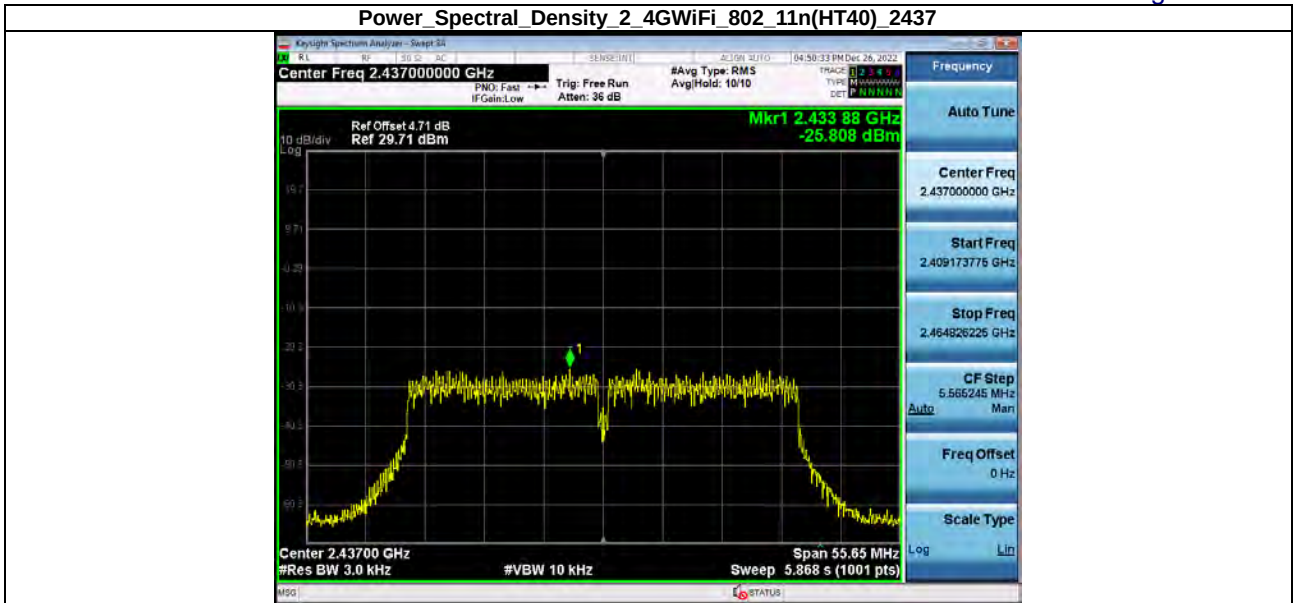


Power Spectral Density 2_4GWiFi_802_11n(HT40)_2452

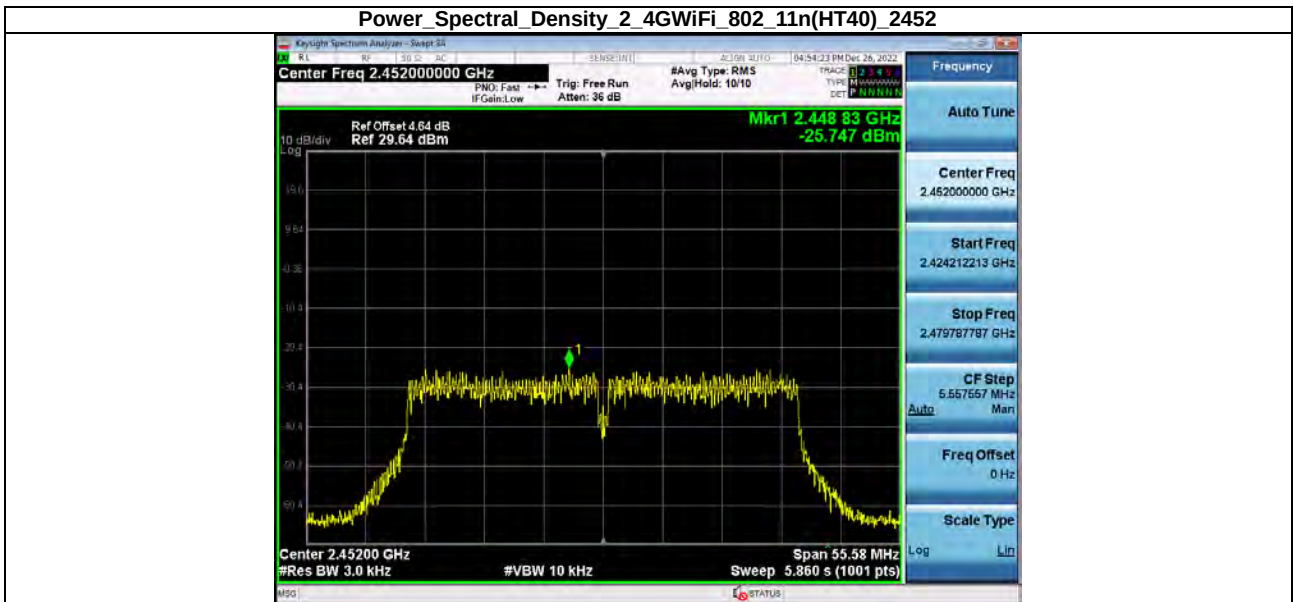


11.5. SPURIOUS EMISSION

ANT1


1 Reference Level 2 4GWiFi 802 11b 2412

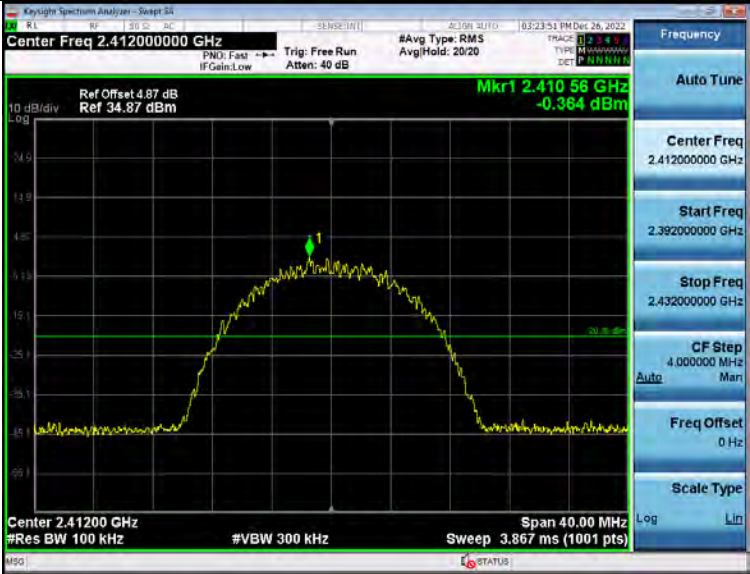


2 Spurious Emission 2 4GWiFi NVNT ANT1 802 11b 2412

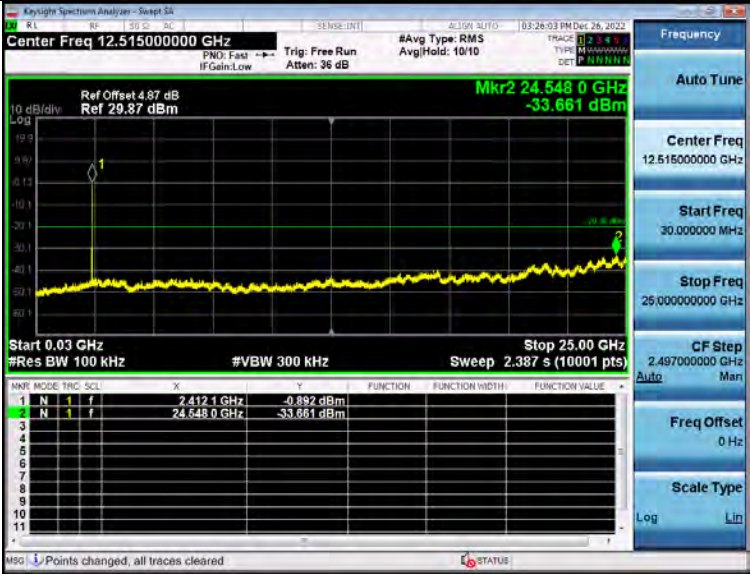

1 Reference Level 2 4GWiFi 802 11b 2437

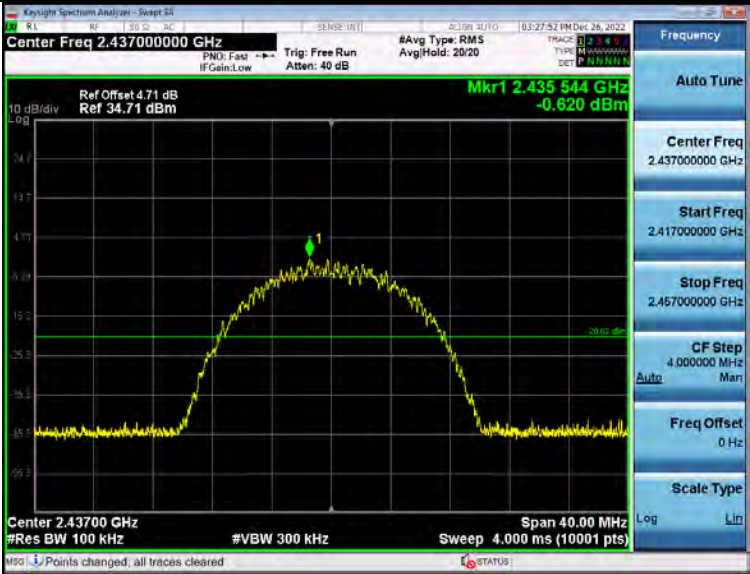


2_Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11b_2437

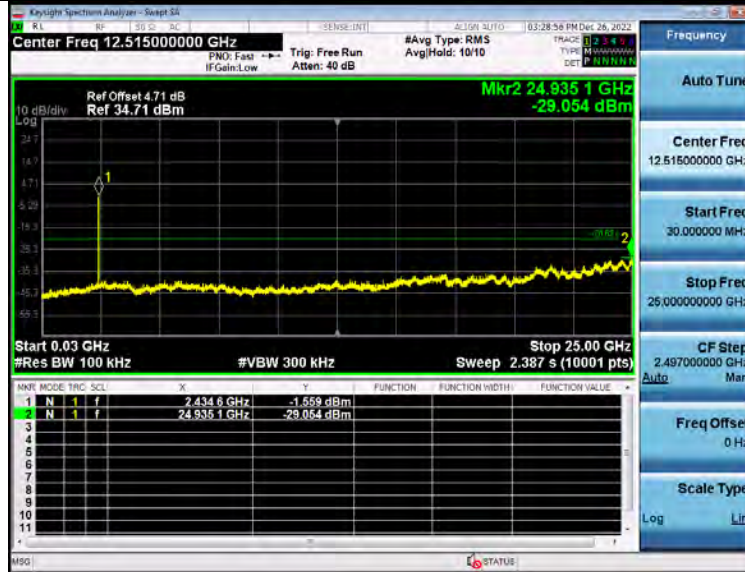


1_Reference Level 2_4GWiFi_802_11b_2462




2_Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11b_2462

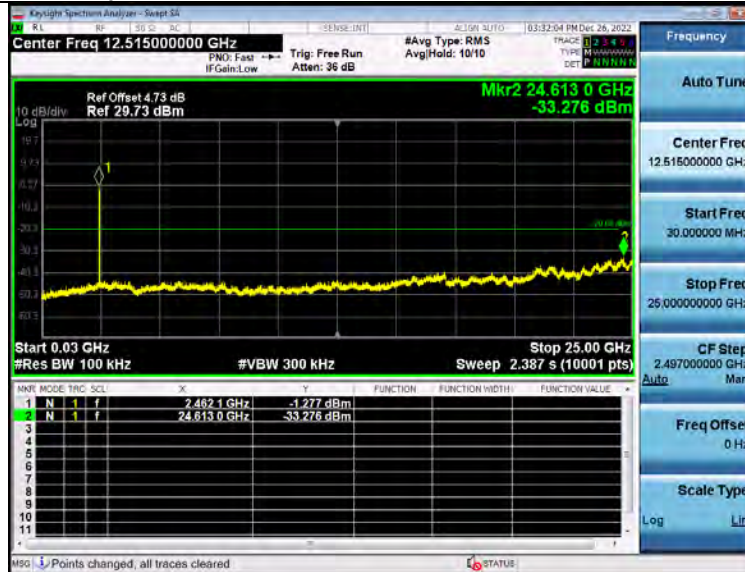


1_Reference_Level_2_4GWiFi_802_11g_2412

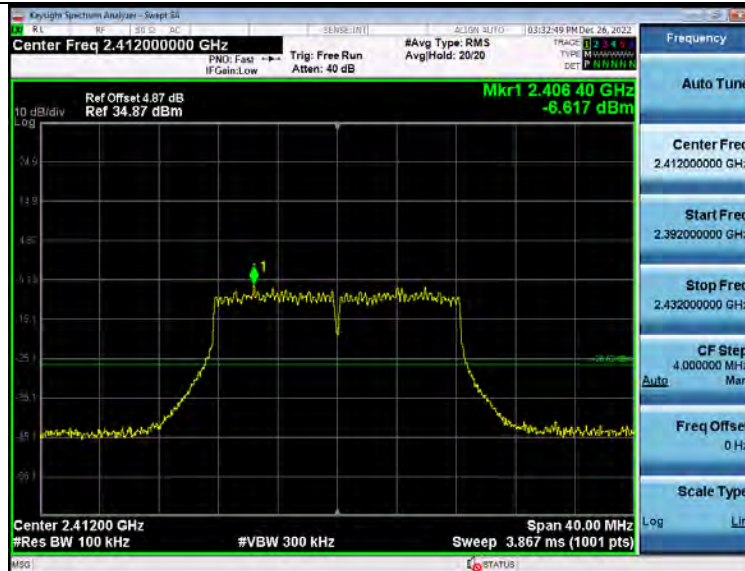

2 Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11g_2412

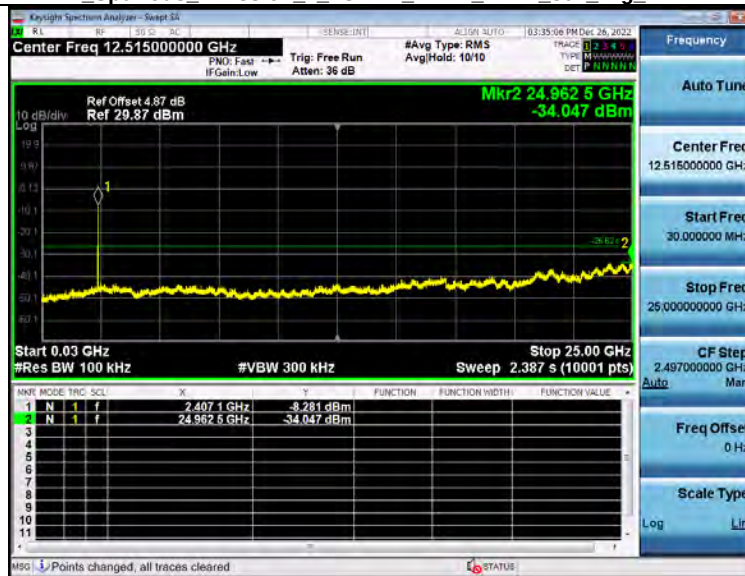


1 Reference Level 2_4GWiFi_802_11g_2437

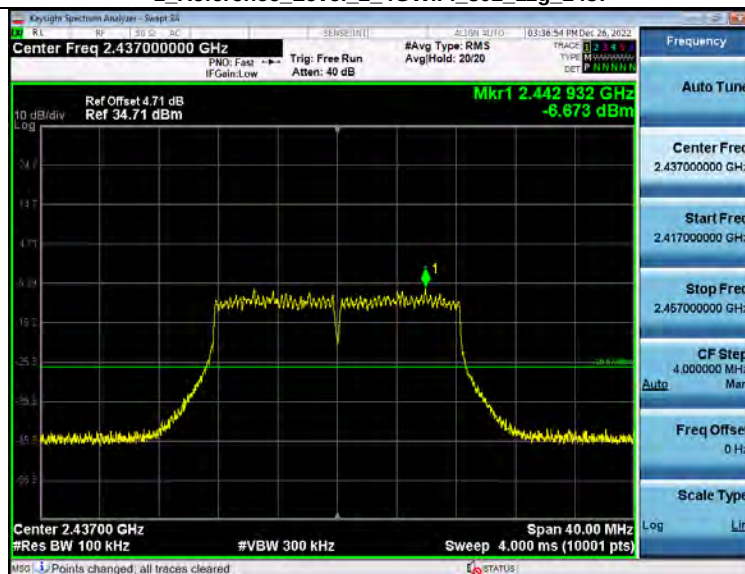


2 Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11g_2437



1 Reference Level 2 4GWiFi 802_11g 2462

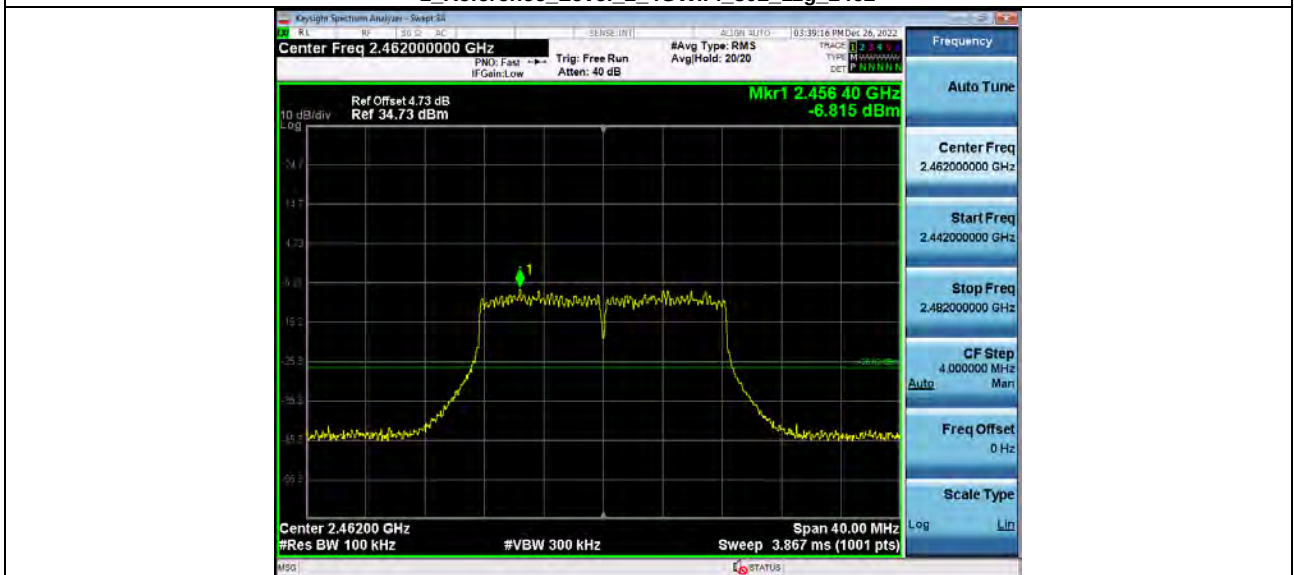


2 Spurious Emission 2 4GWiFi_NVNT_ANT1 802_11g 2462

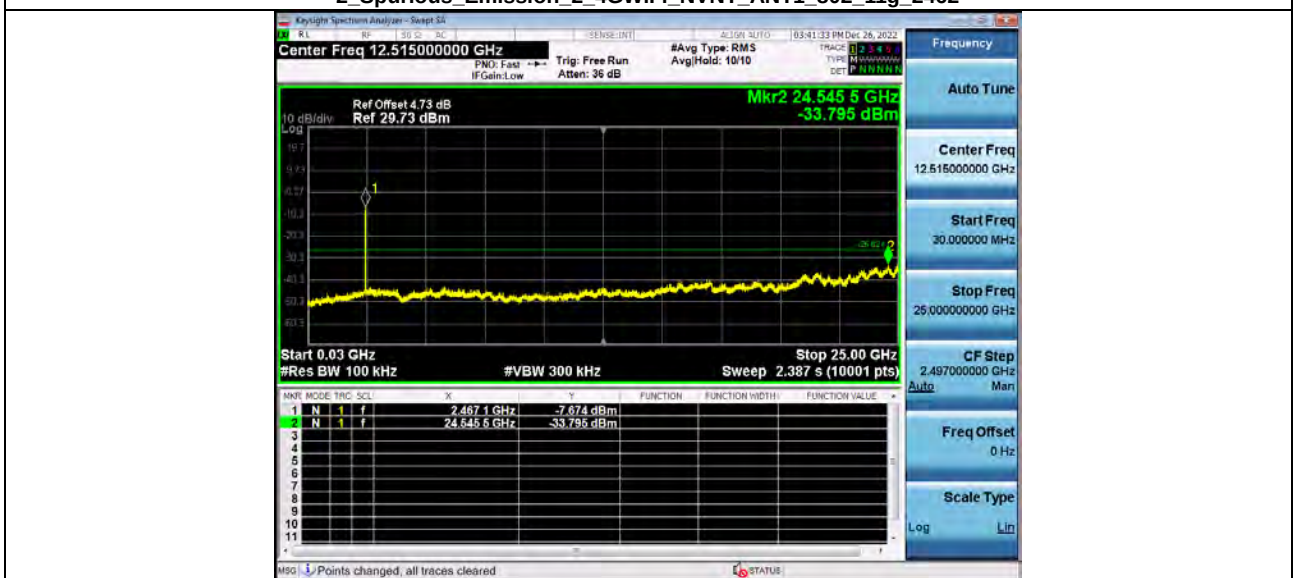


1 Reference Level 2 4GWiFi 802_11n(HT20) 2412




2_Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2412

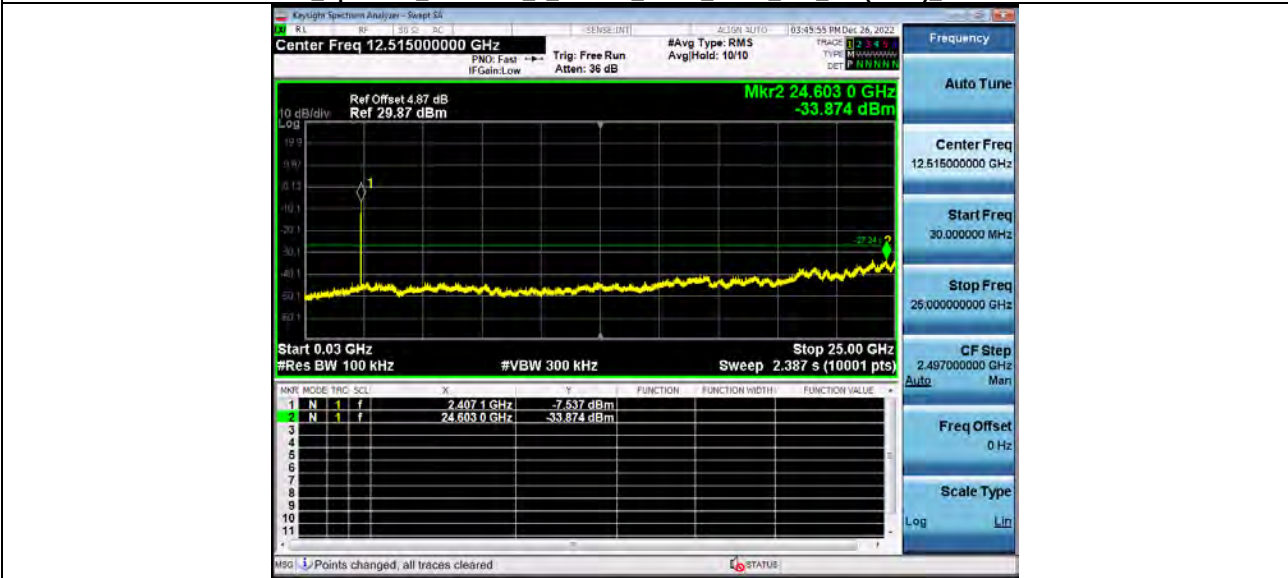

1_Reference Level 2_4GWiFi_802_11n(HT20)_2437

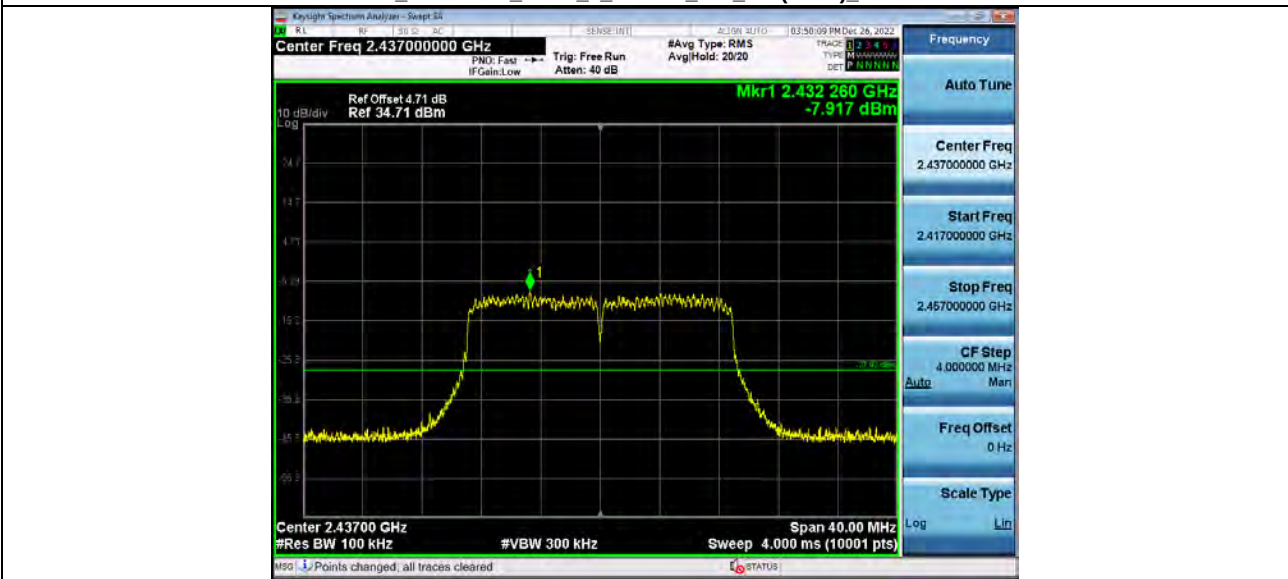


2_Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2437

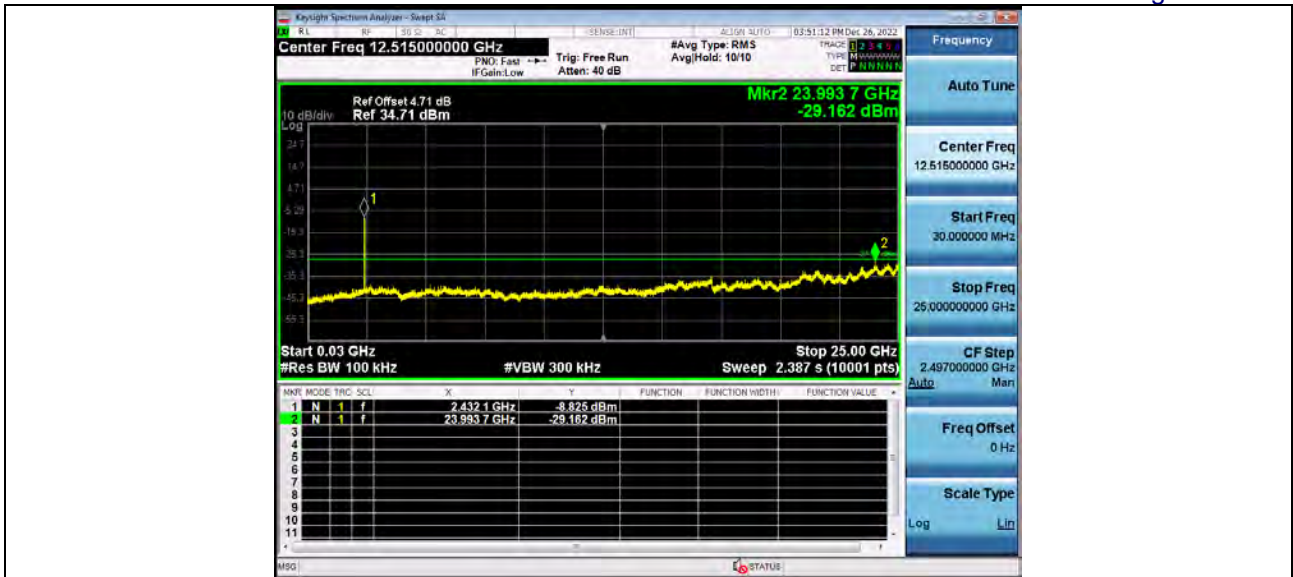


1 Reference Level 2 4GWiFi 802_11n(HT20) 2462




2 Spurious Emission 2 4GWiFi NVNT ANT1 802_11n(HT20) 2462

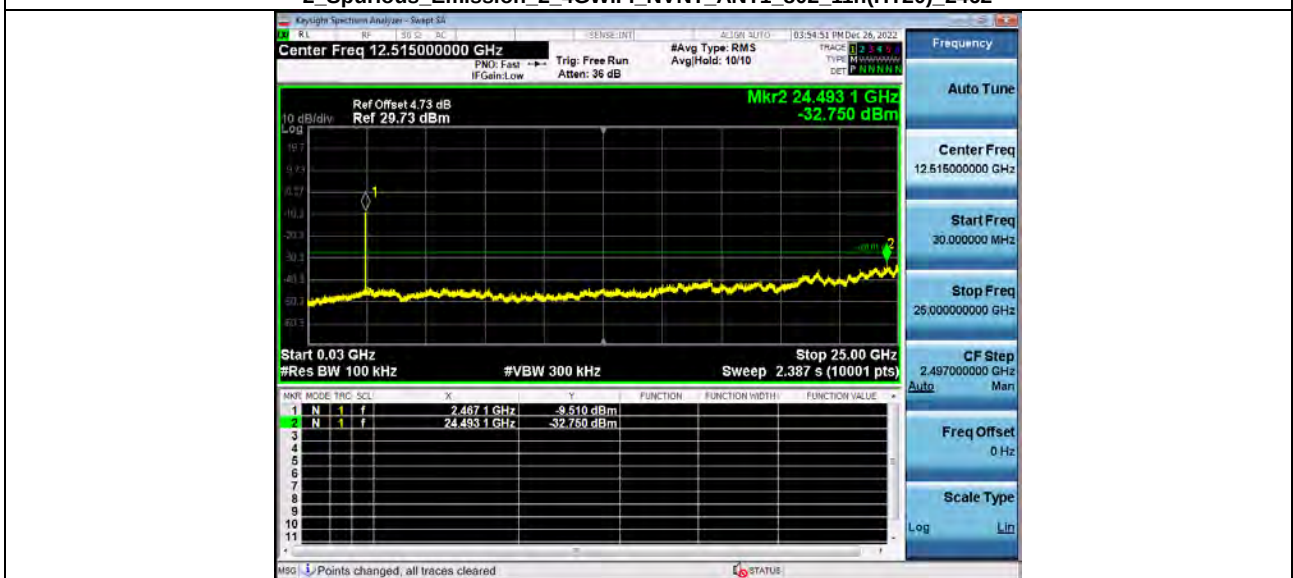

1 Reference Level 2 4GWiFi 802_11n(HT40) 2422

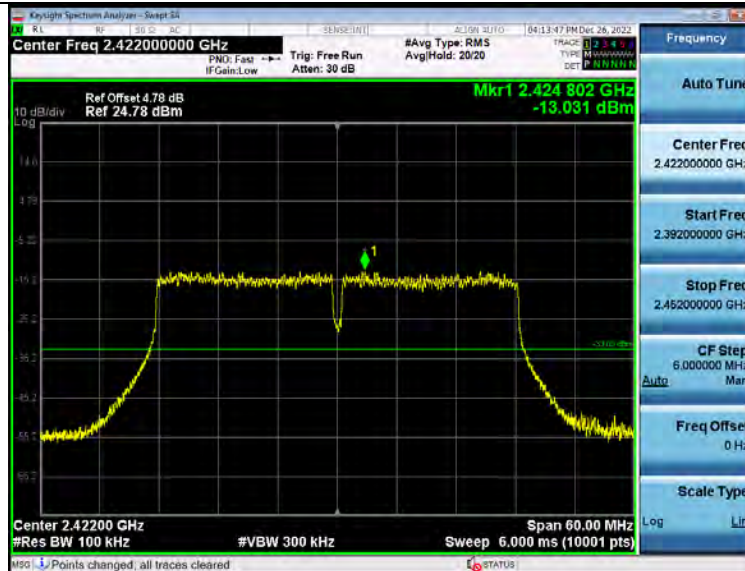


2_Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2422

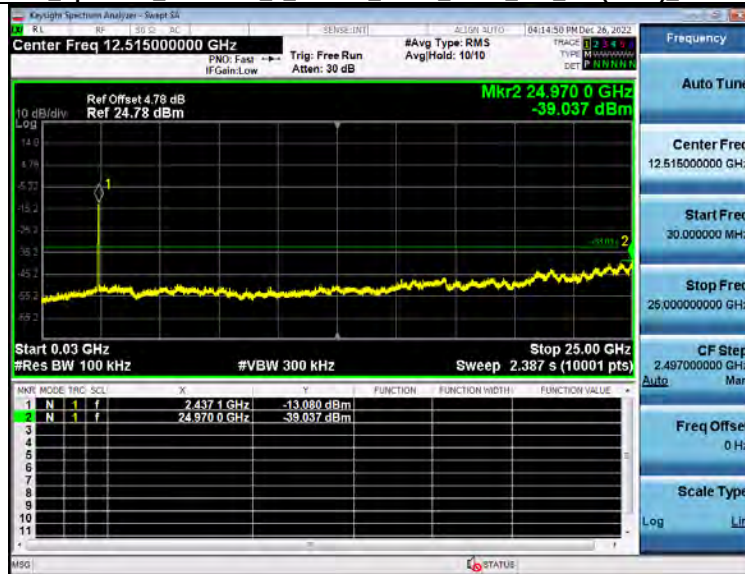


1_Reference Level 2_4GWiFi_802_11n(HT40)_2437




2_Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2437

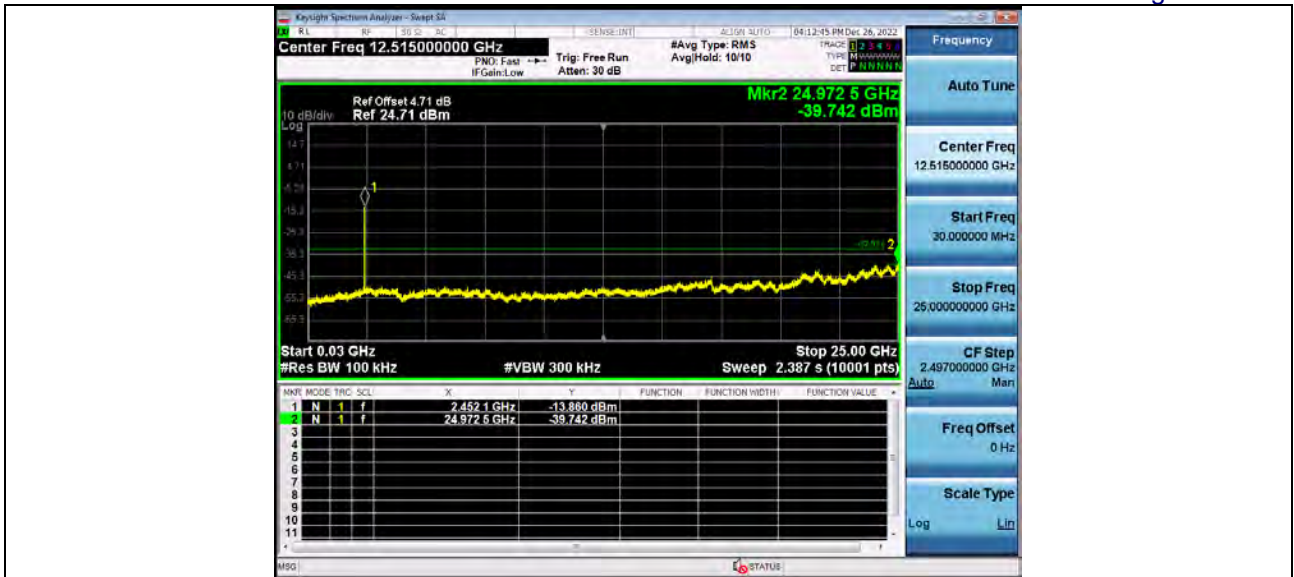

1 Reference Level 2_4GWiFi 802_11n(HT40) 2452

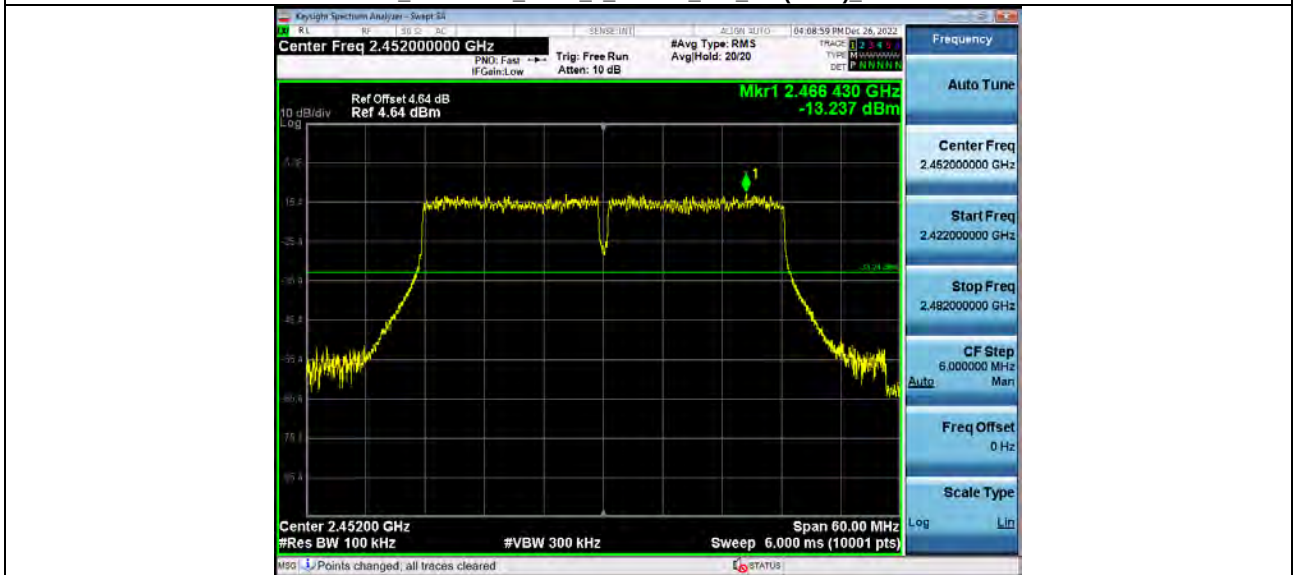


2 Spurious Emission 2_4GWiFi_NVNT ANT1 802_11n(HT40) 2452

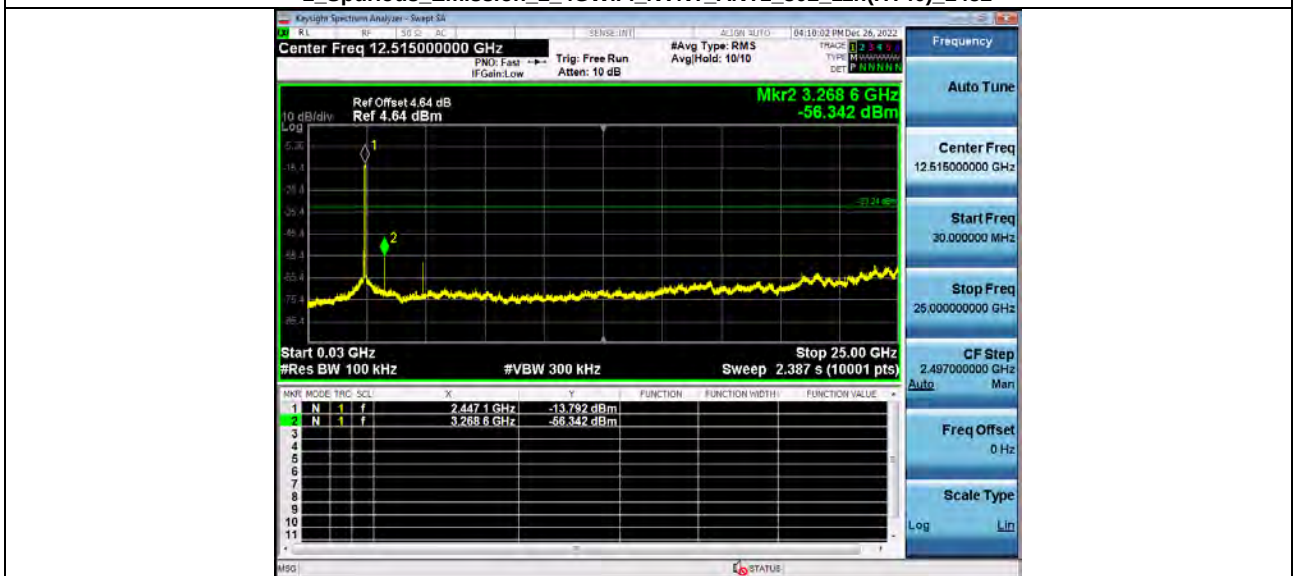

ANT2


1 Reference Level 2 4GWiFi 802 11b 2412

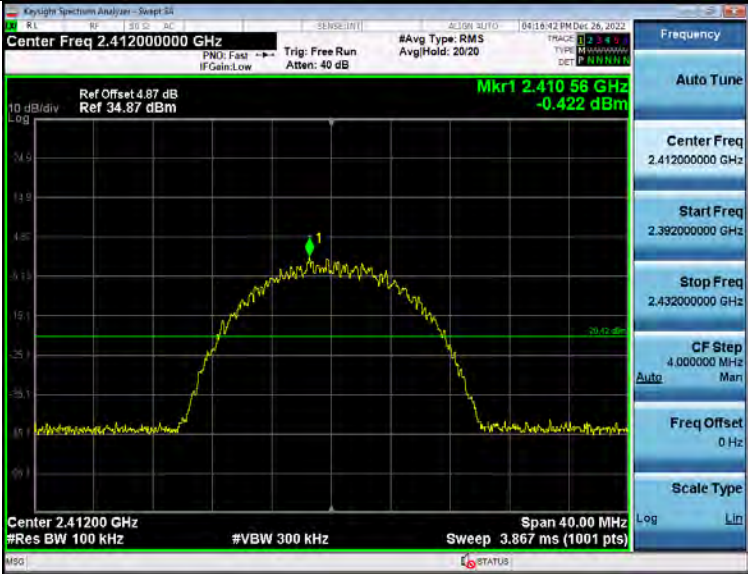


2 Spurious Emission 2 4GWiFi NVNT ANT1 802 11b 2412




1 Reference Level 2 4GWiFi 802 11b 2437

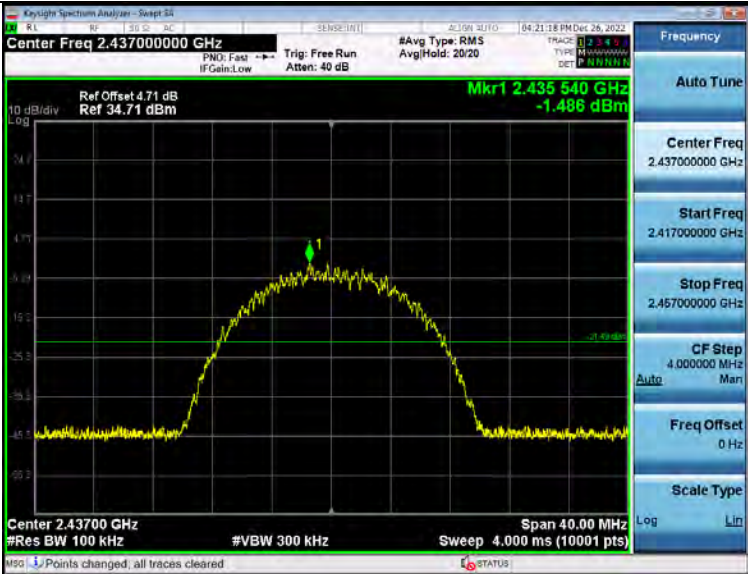


2 Spurious Emission 2 4GWiFi NVNT ANT1 802 11b 2437

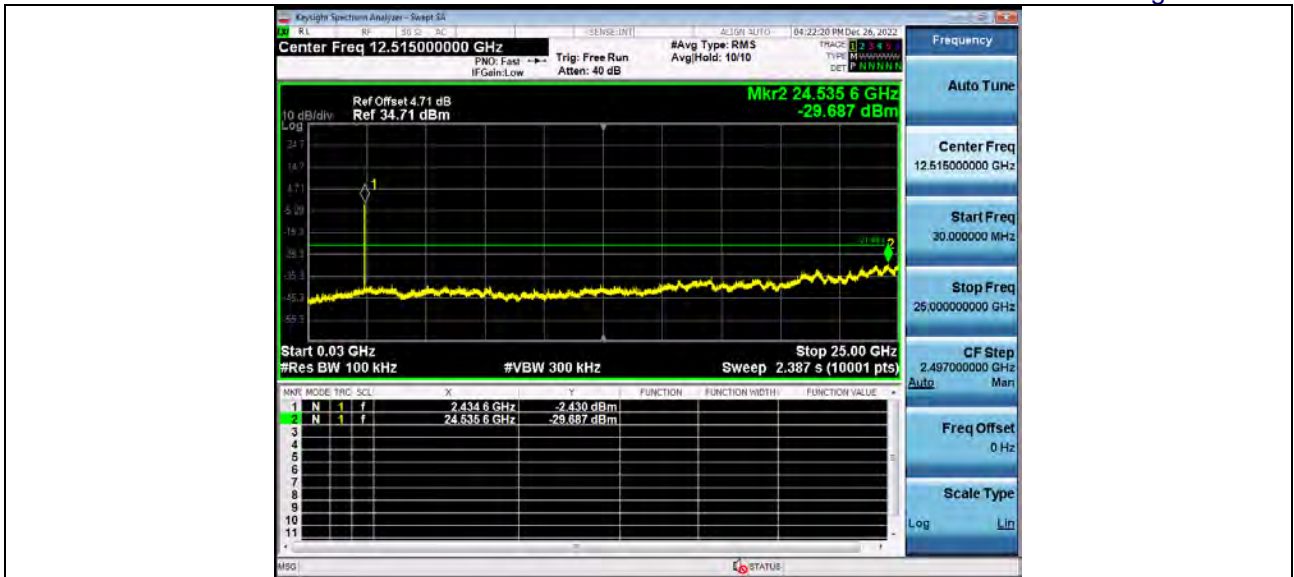


1 Reference Level 2 4GWiFi 802_11b 2462

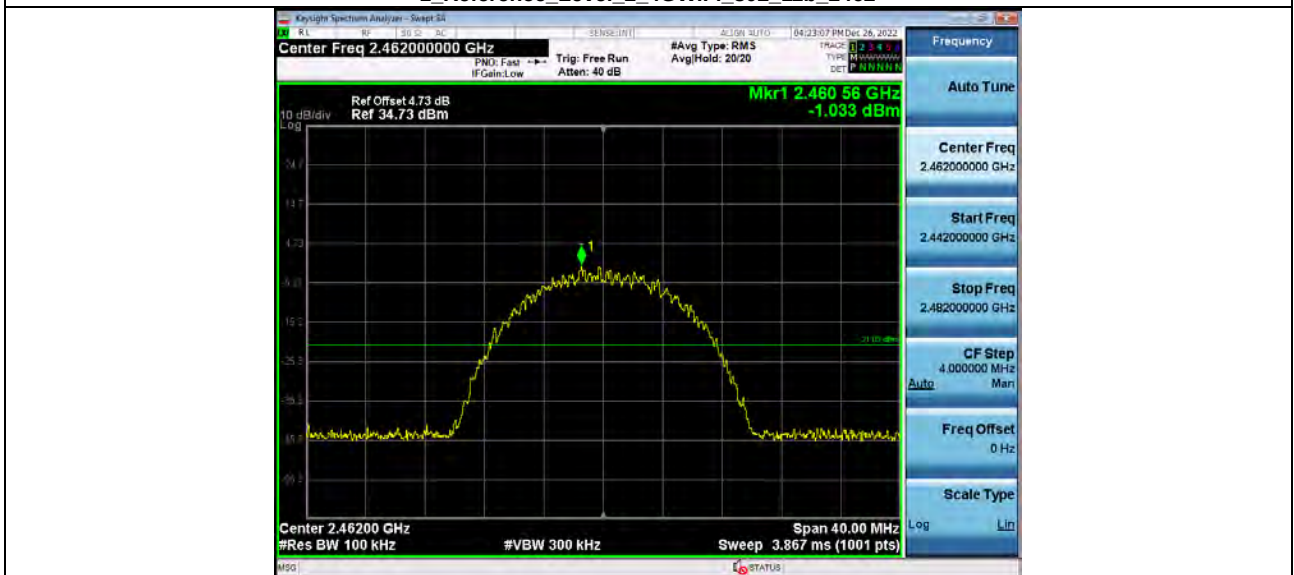


2 Spurious Emission 2 4GWiFi_NVNT_ANT1 802_11b 2462

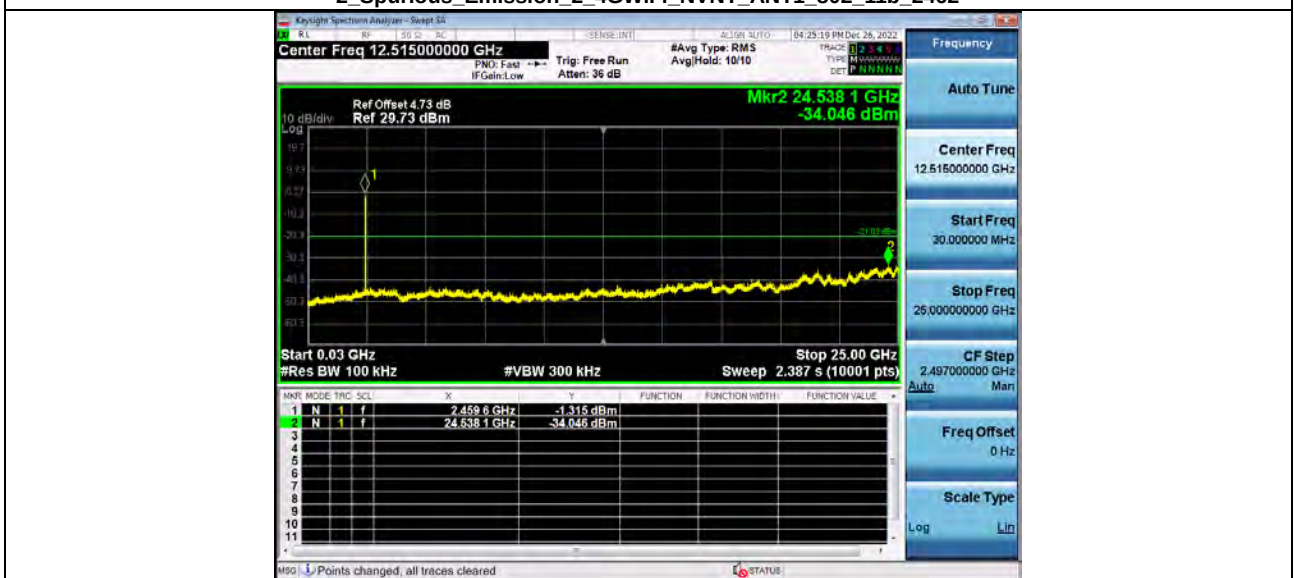


1 Reference Level 2 4GWiFi 802_11g 2412

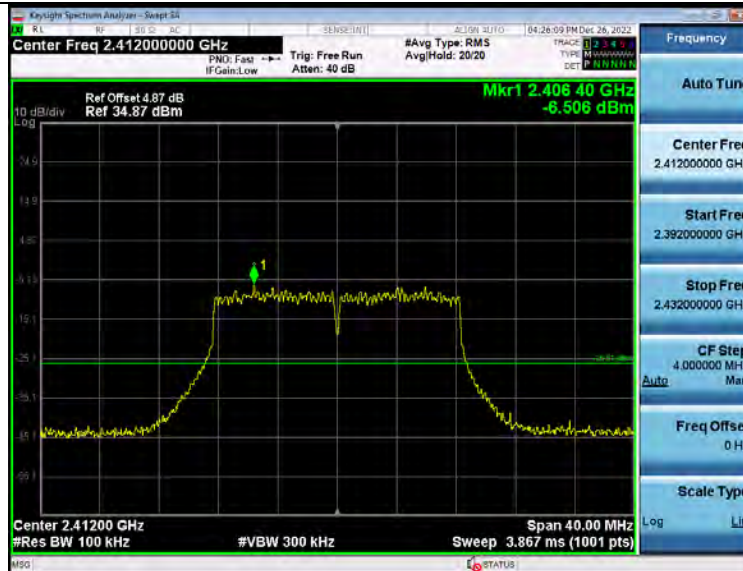


2 Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11g_2412

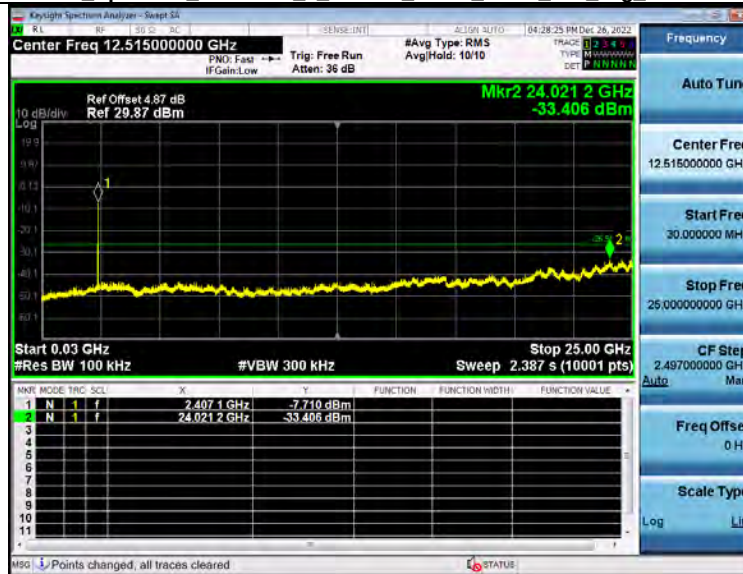


1 Reference Level 2_4GWiFi_802_11g_2437

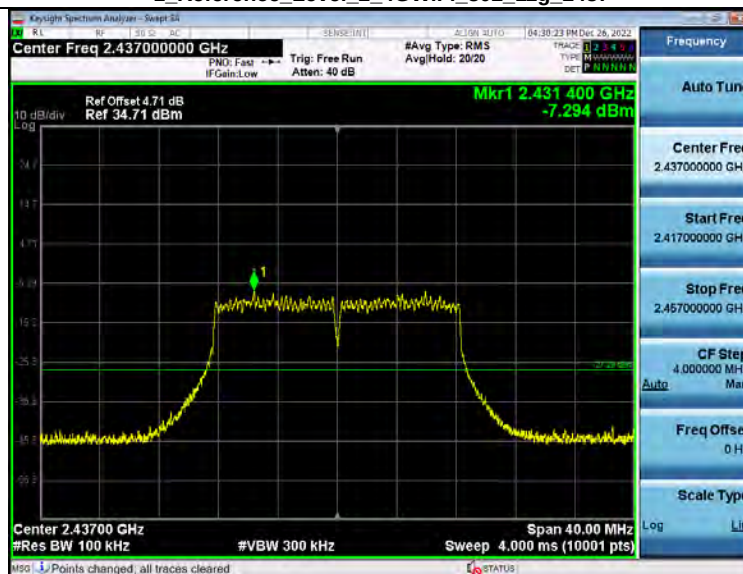


2 Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11g_2437

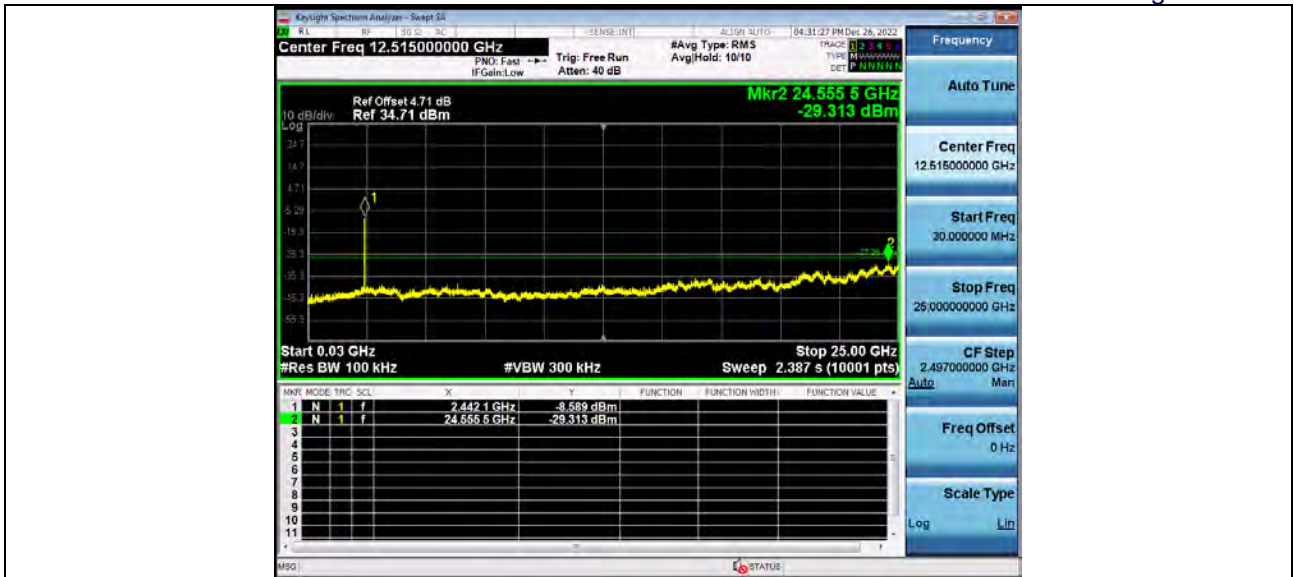


1 Reference Level 2 4GWiFi 802_11g 2462

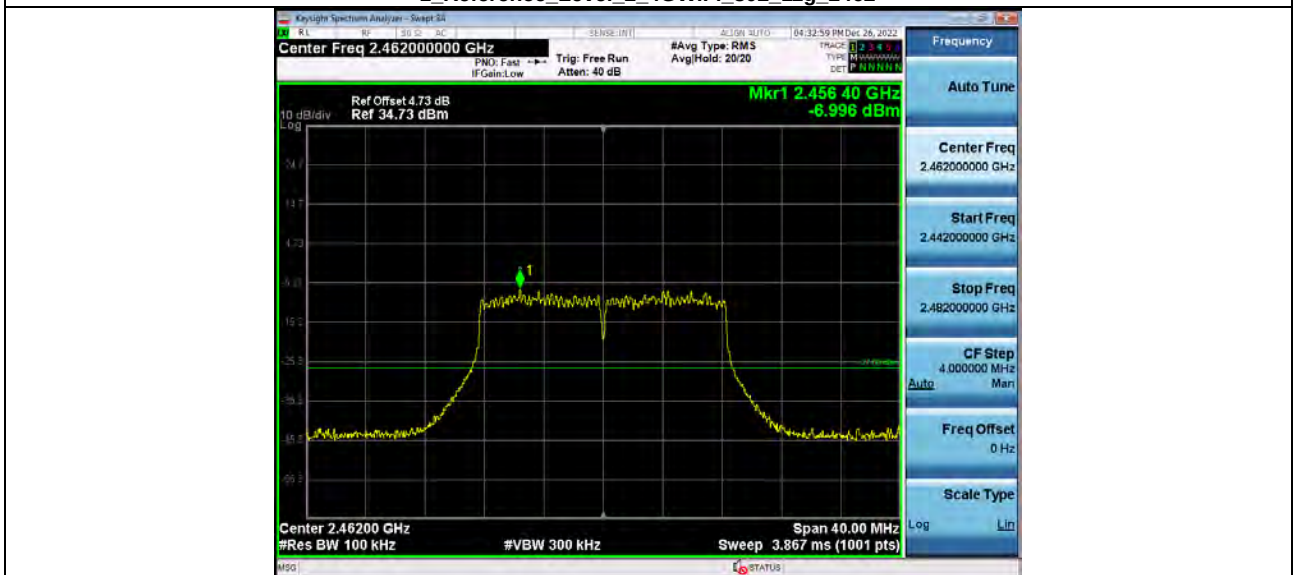


2 Spurious Emission 2 4GWiFi_NVNT ANT1 802_11g 2462

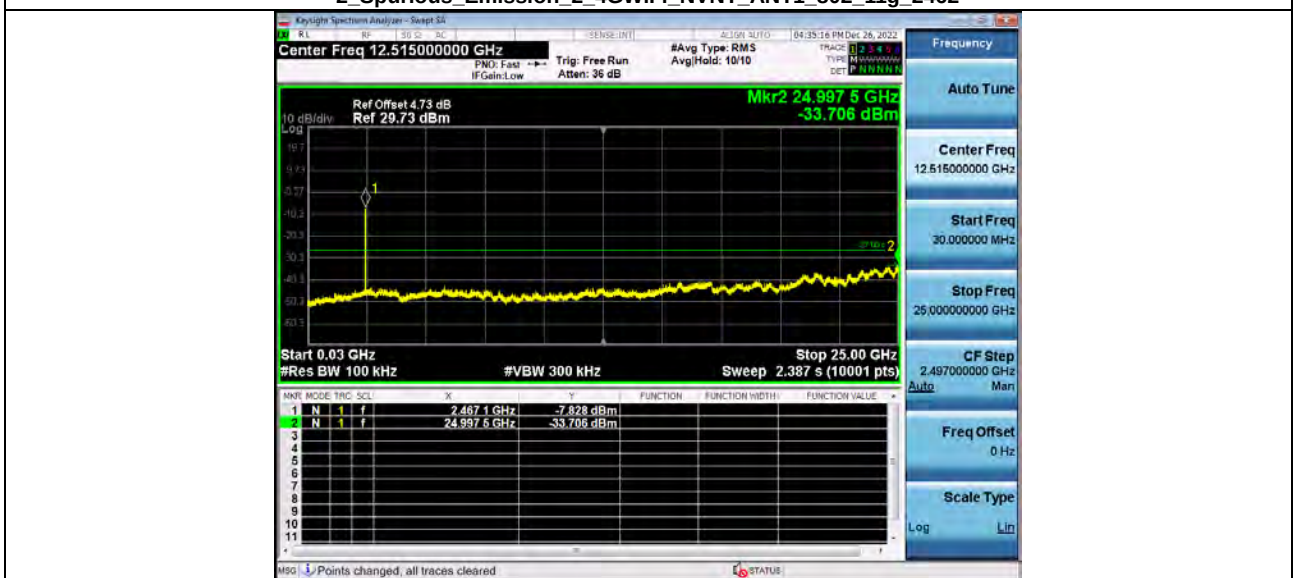


1 Reference Level 2 4GWiFi 802_11n(HT20) 2412

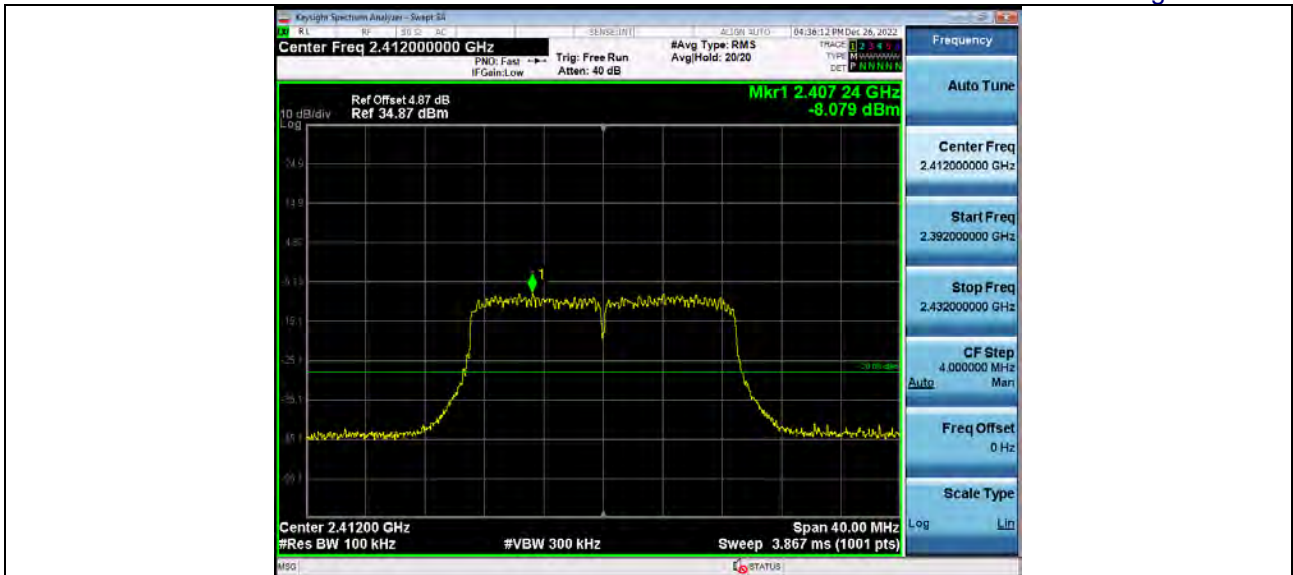


2_Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2412

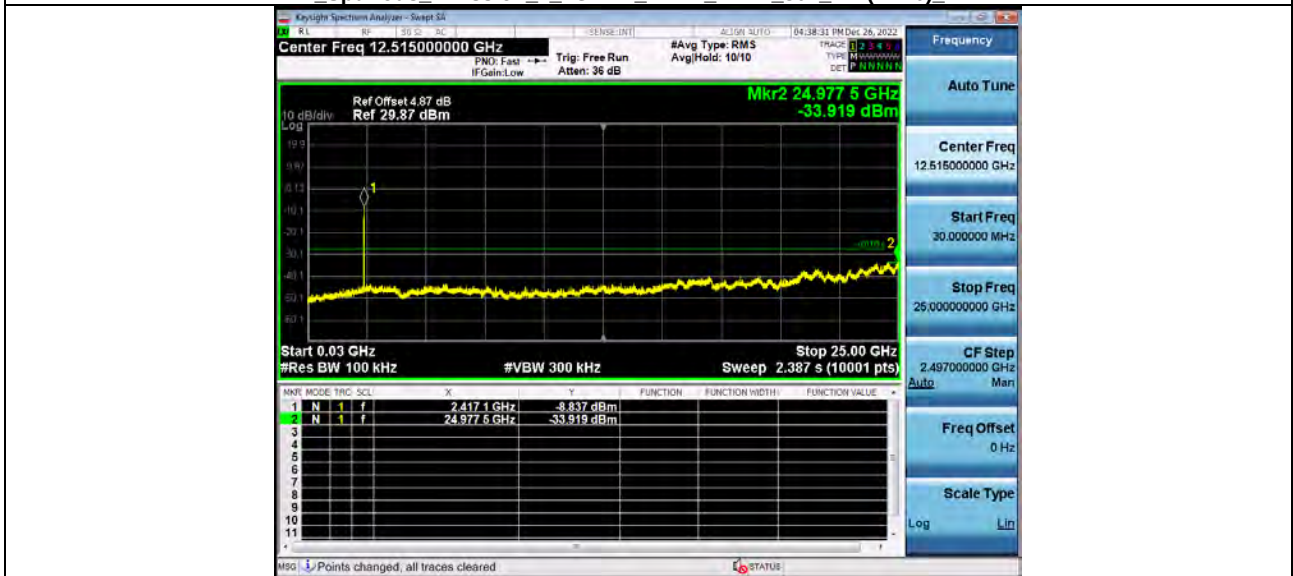


1_Reference Level 2_4GWiFi_802_11n(HT20)_2437

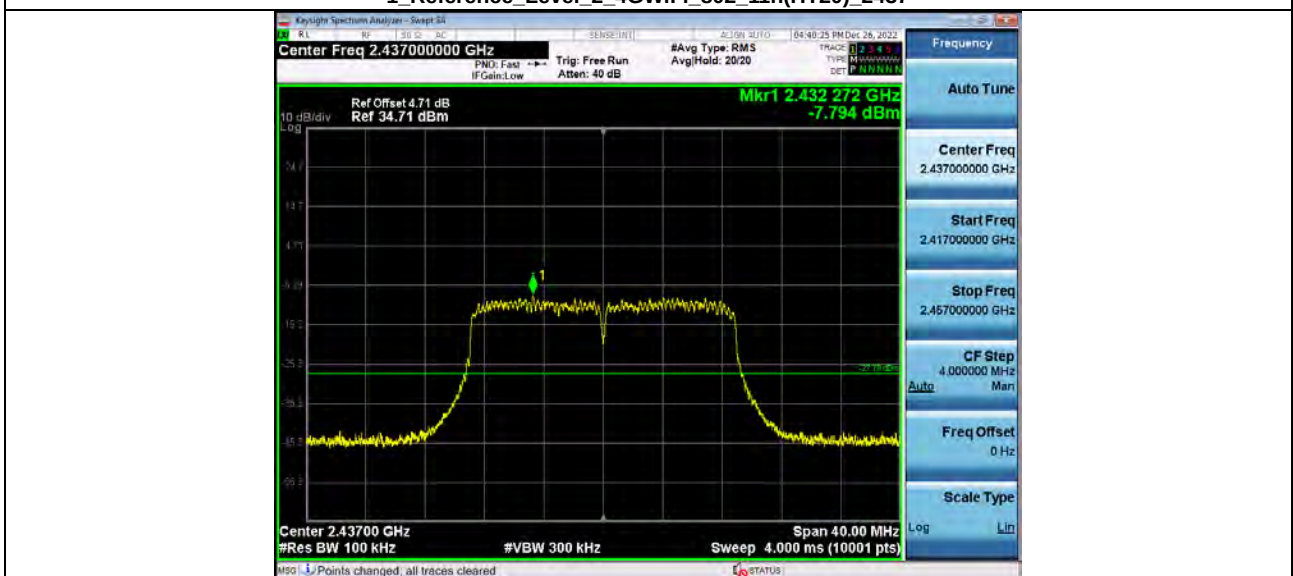


2_Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2437

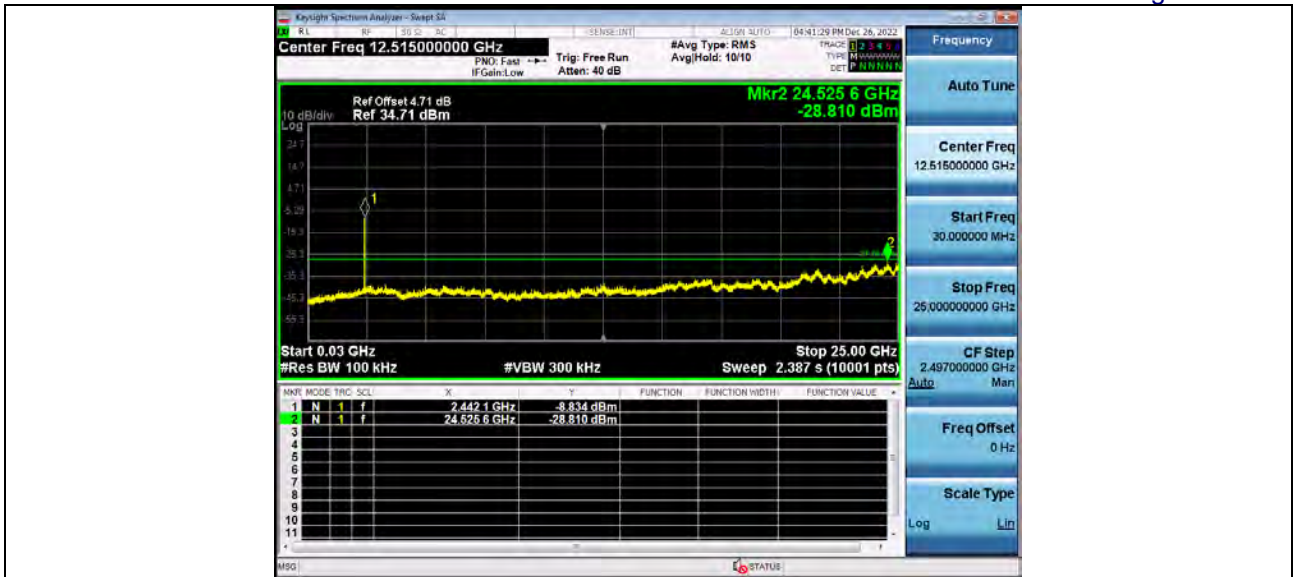


1 Reference Level 2 4GWiFi 802_11n(HT20) 2462

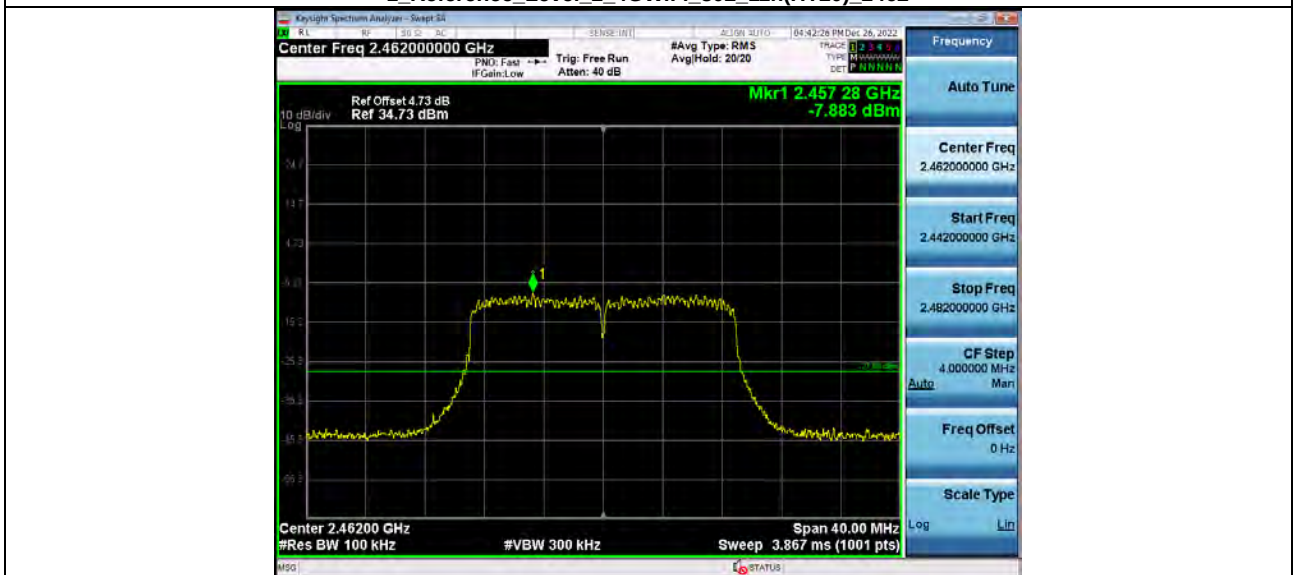


2 Spurious Emission 2 4GWiFi NVNT ANT1 802_11n(HT20) 2462

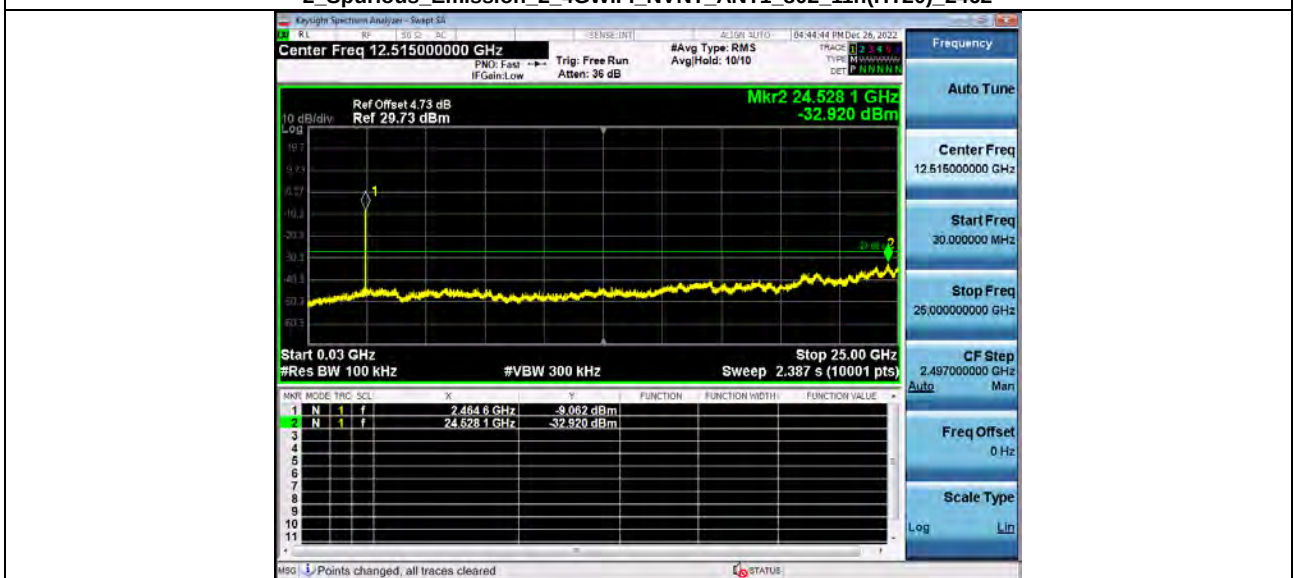


1 Reference Level 2 4GWiFi 802_11n(HT40) 2422

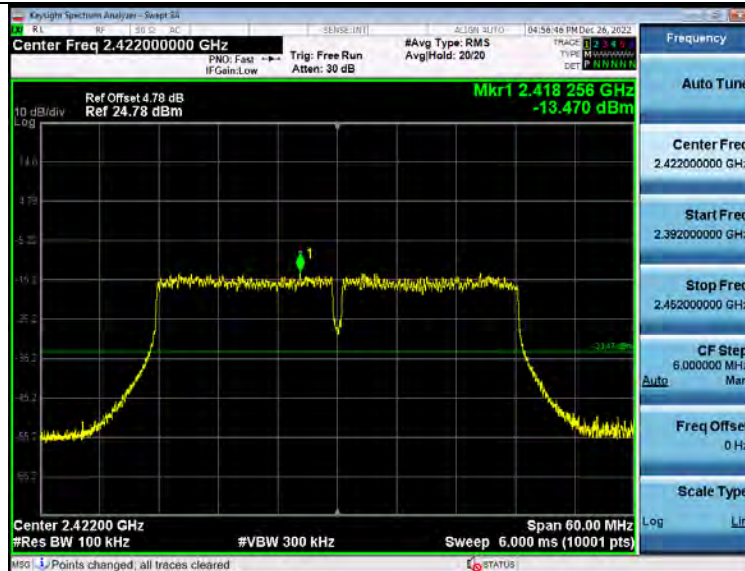


2_Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2422

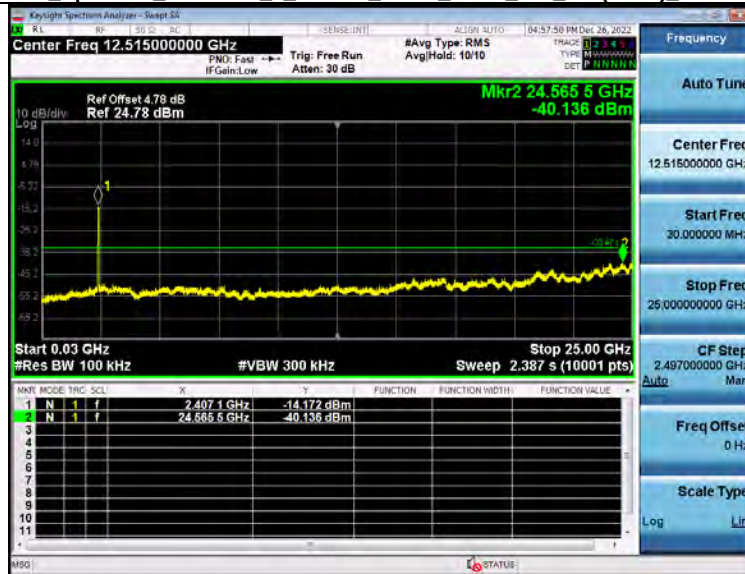


1_Reference Level 2_4GWiFi_802_11n(HT40)_2437

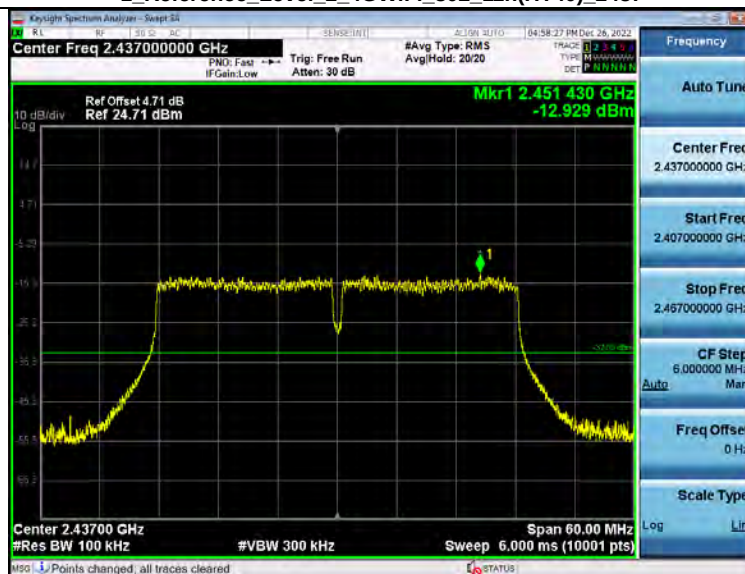

2_Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2437

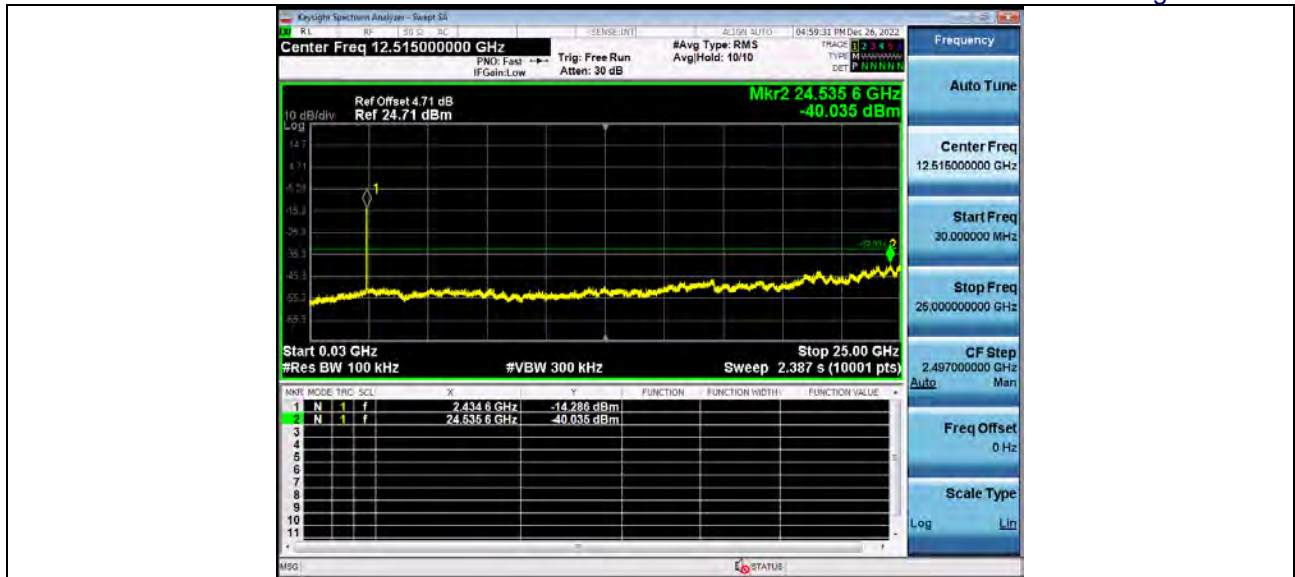

1 Reference Level 2_4GWiFi 802_11n(HT40) 2452

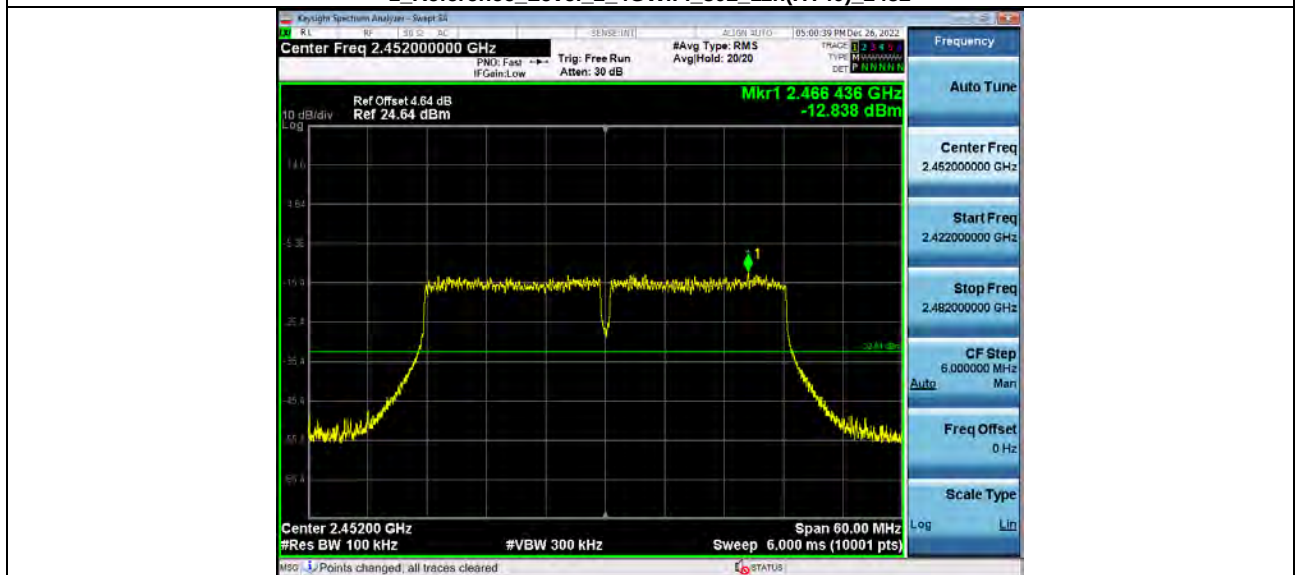

2 Spurious Emission 2_4GWiFi_NVNT ANT1 802_11n(HT40) 2452



12. TEST SETUP PHOTO

Reference to the Test setup file for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the external photos file and internal photos file for details.

***** END OF REPORT *****