


AppendixA: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	902.3	0.146	902.230	902.376	≤ 0.25	PASS
TX	Ant1	906	0.138	905.934	906.072	≤ 0.25	PASS
TX	Ant1	914.9	0.143	914.833	914.976	≤ 0.25	PASS

Test Graphs

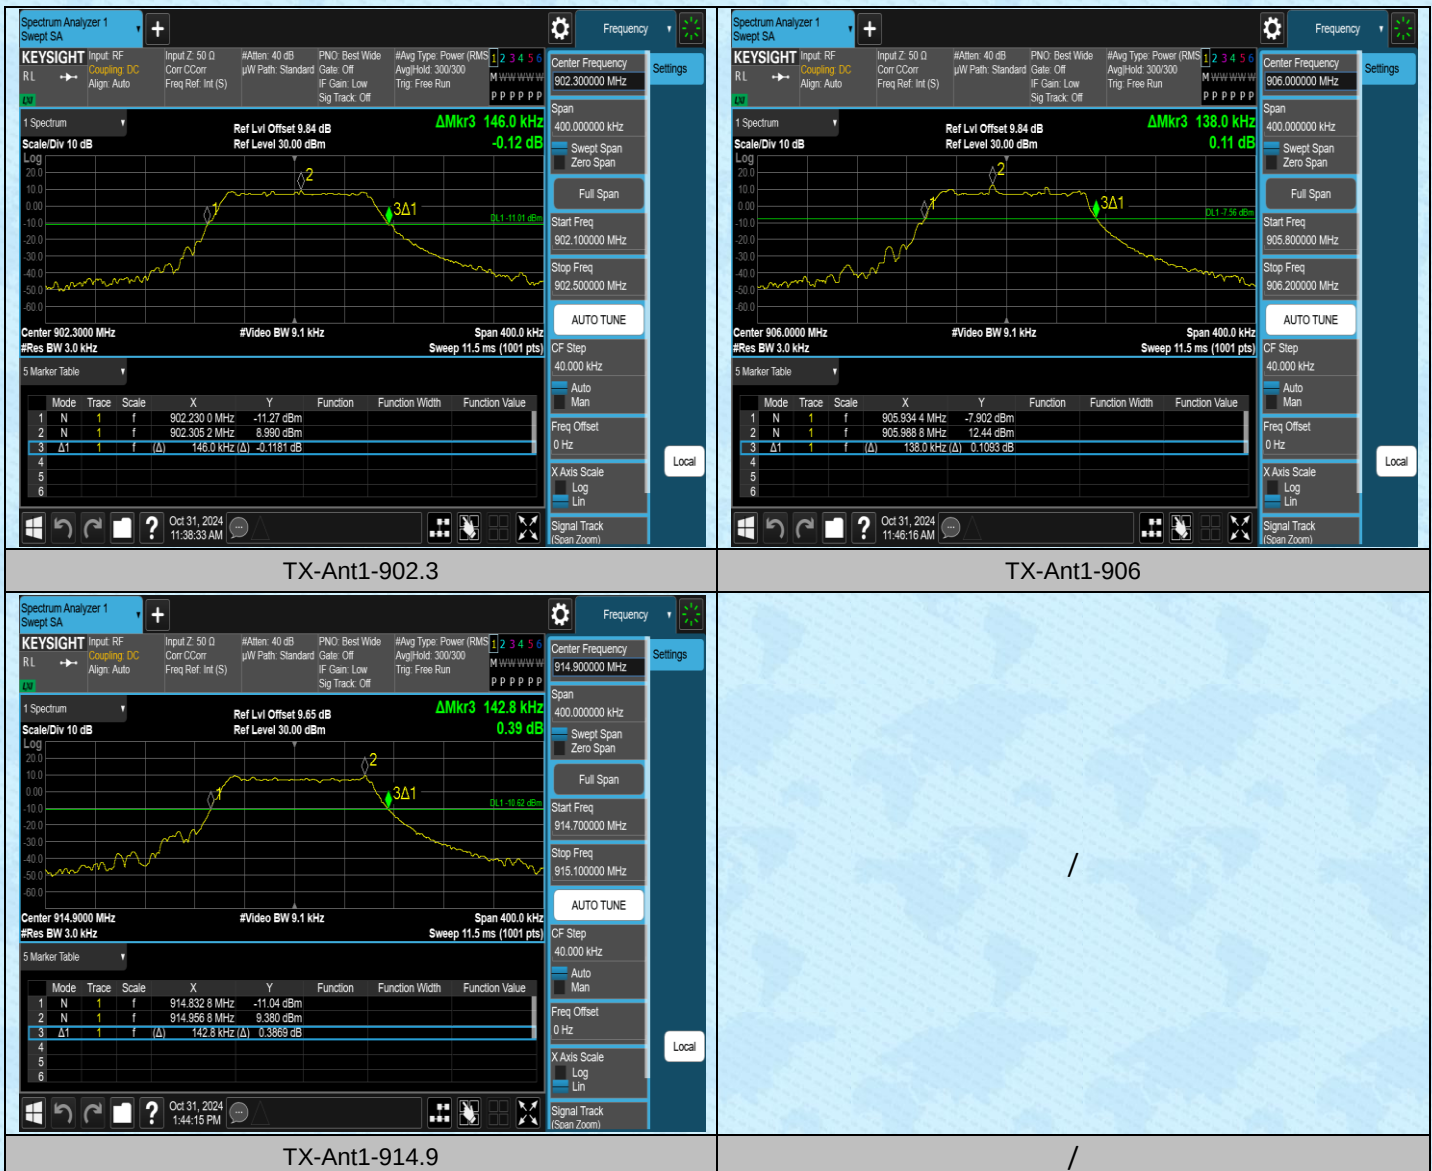


AppendixB: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	902.3	0.12583	902.2403	902.3661	---	---
TX	Ant1	906	0.12593	905.9403	906.0662	---	---
TX	Ant1	914.9	0.12627	914.8404	914.9667	---	---

Test Graphs

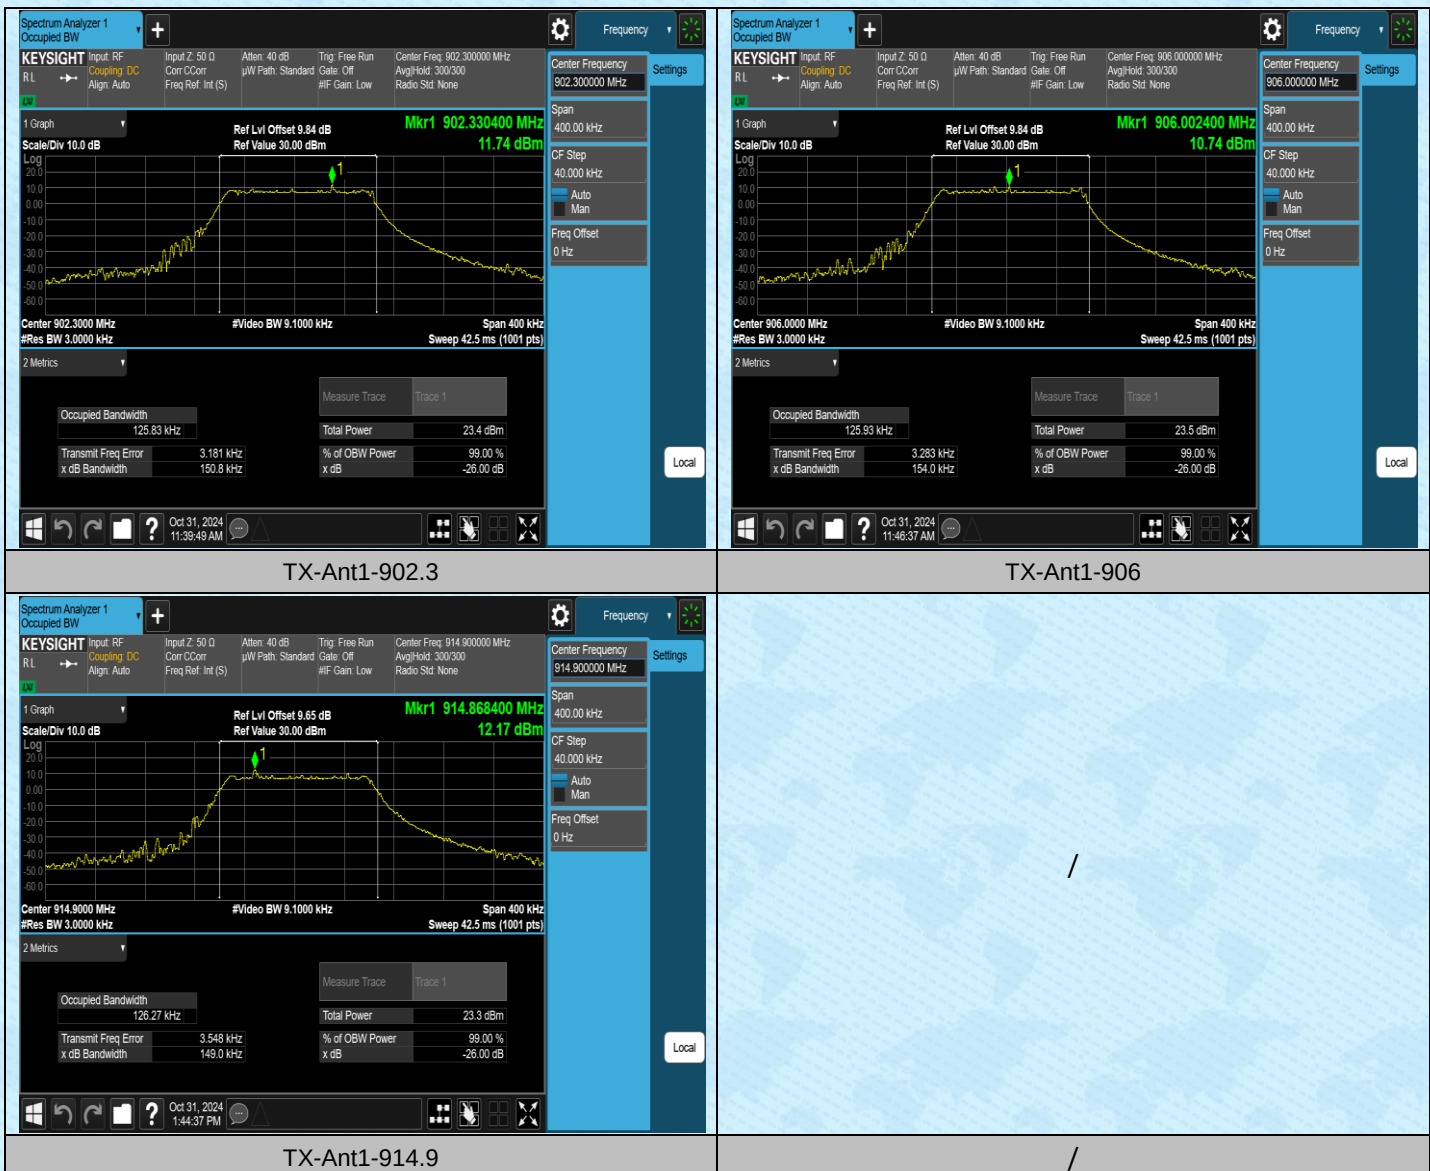

AppendixC: Maximum conducted output power**Test Result**

TestMode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	902.3	15.03	≤30	PASS
TX	Ant1	906	15.01	≤30	PASS
TX	Ant1	914.9	14.90	≤30	PASS


TestMode	Antenna	Frequency[MHz]	AVG power [dBm]	Limit[dBm]	Verdict
TX	Ant1	902.3	13.80	≤30	PASS
TX	Ant1	906	13.77	≤30	PASS
TX	Ant1	914.9	13.68	≤30	PASS

AppendixD: Carrier frequency separation

Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
TX	Ant1	Hop_902.3	0.230	≥0.146	PASS
TX	Ant1	Hop_906.0	0.209	≥0.138	PASS
TX	Ant1	Hop_914.9	0.223	≥0.143	PASS

Test Graphs

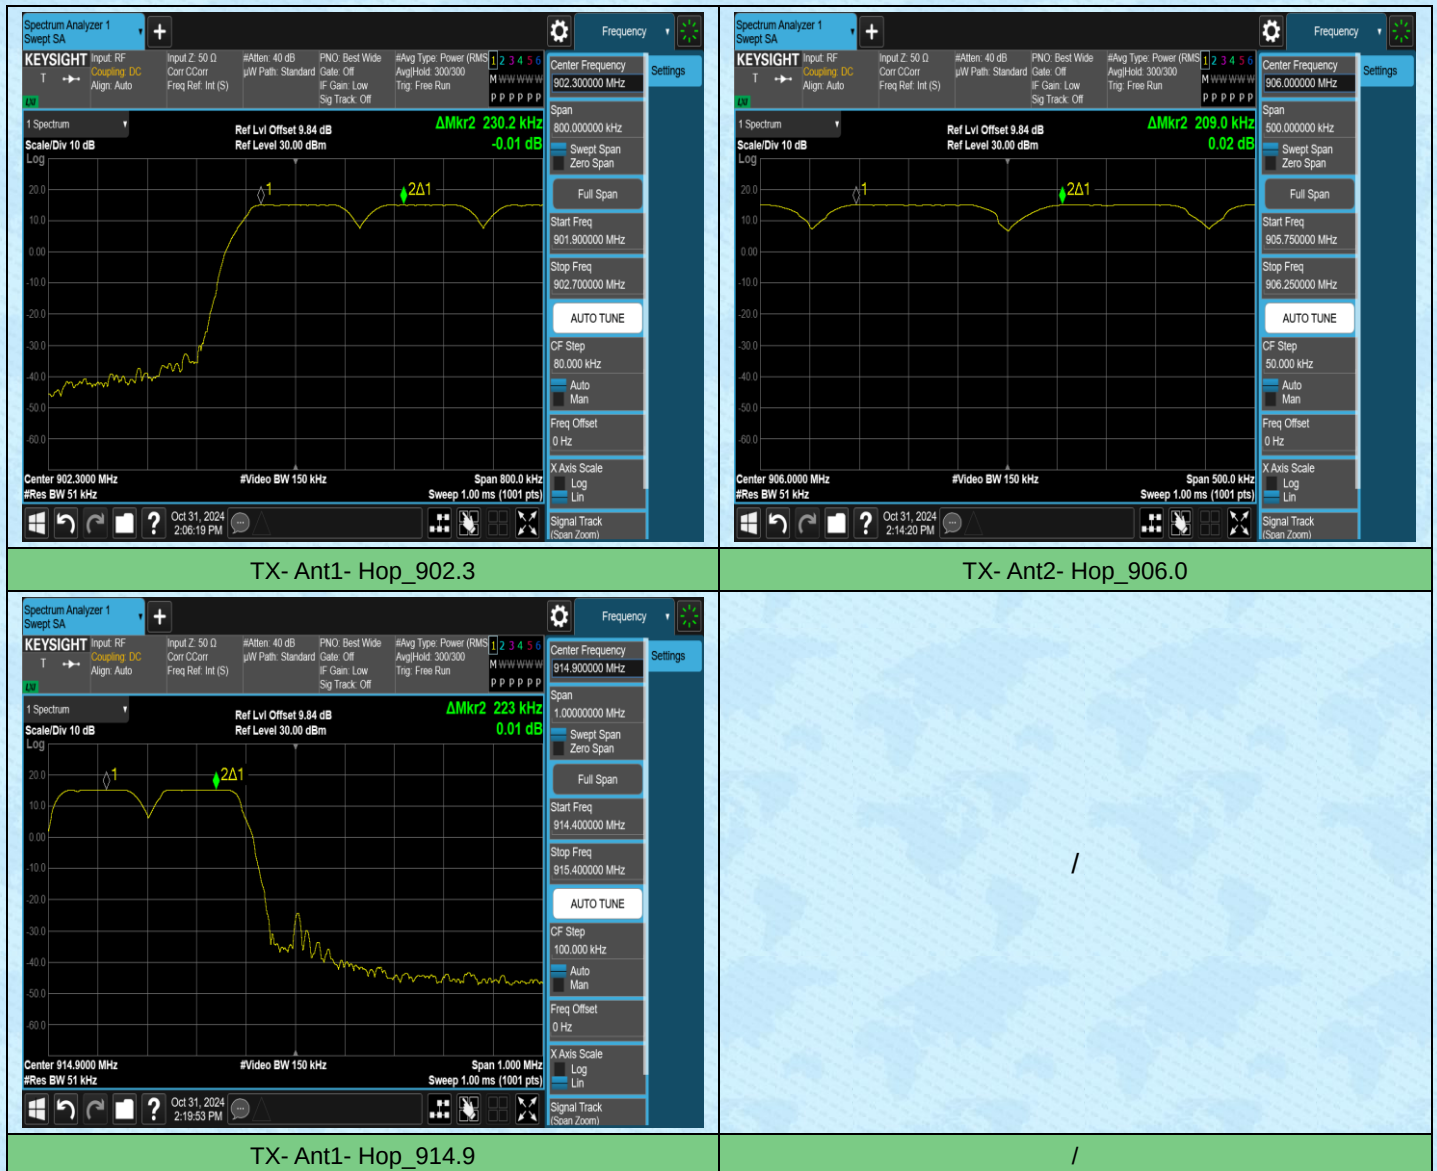



AppendixE: Time of occupancy

Test Result


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
TX	Ant1	Hop_902.3	102.8	2	0.2056	≤0.4	PASS
TX	Ant2	Hop_906.0	102.8	2	0.2056	≤0.4	PASS
TX	Ant1	Hop_914.9	101.9	1	0.1019	≤0.4	PASS

Test Graphs

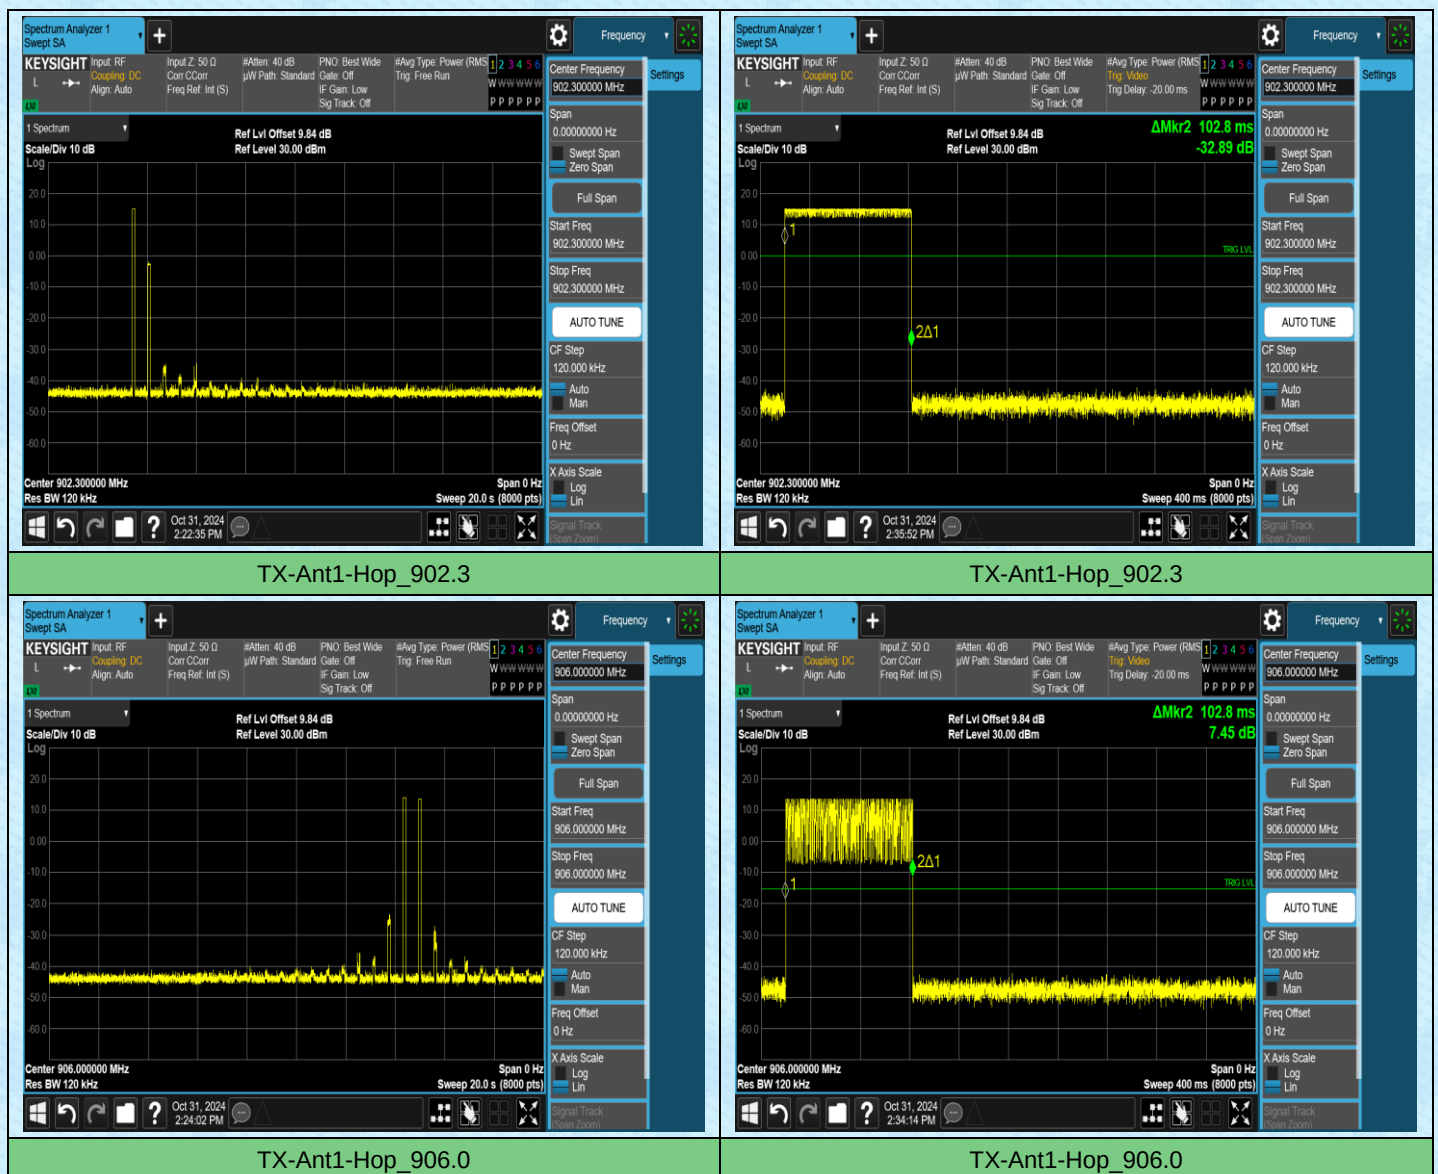

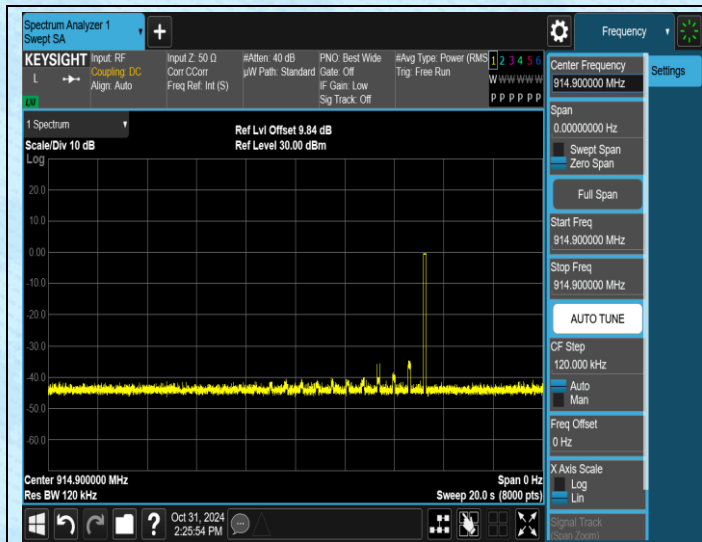

TX-Ant1-Hop_914.9

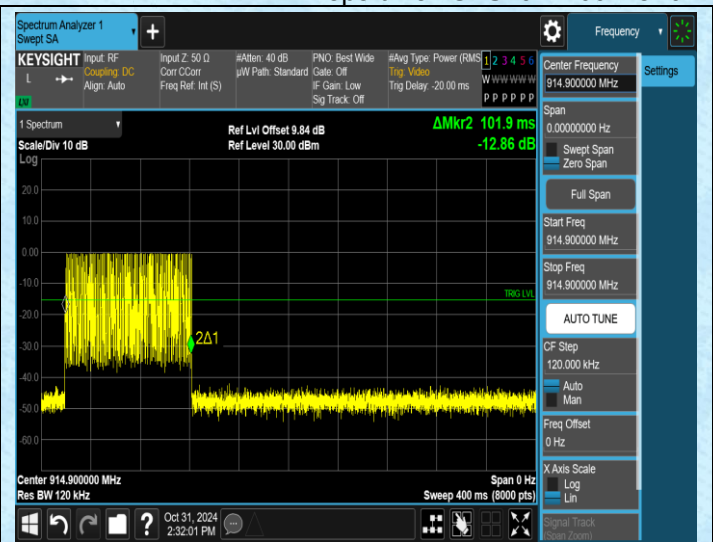


TX-Ant1-Hop_914.9

AppendixF: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
TX	Ant1	Hop	63	≥50	PASS

Test Graphs

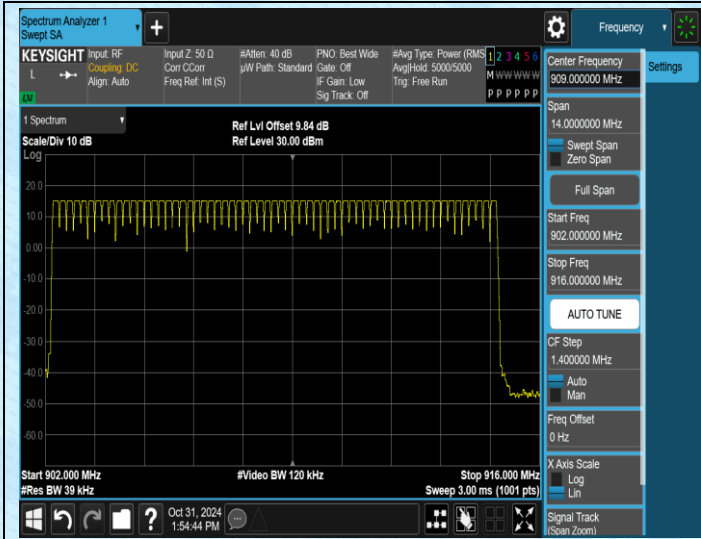
	/
TX-Ant1-Hop-PASS	/

AppendixG:Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	Low	902.3	15.03	-38.9	≤-4.97	PASS
TX	Ant1	High	914.9	14.88	-53.84	≤-5.12	PASS
TX	Ant1	Low	Hop	15.09	-40.15	≤-4.91	PASS
TX	Ant1	High	Hop	14.95	-52.64	≤-5.05	PASS

Test Graphs

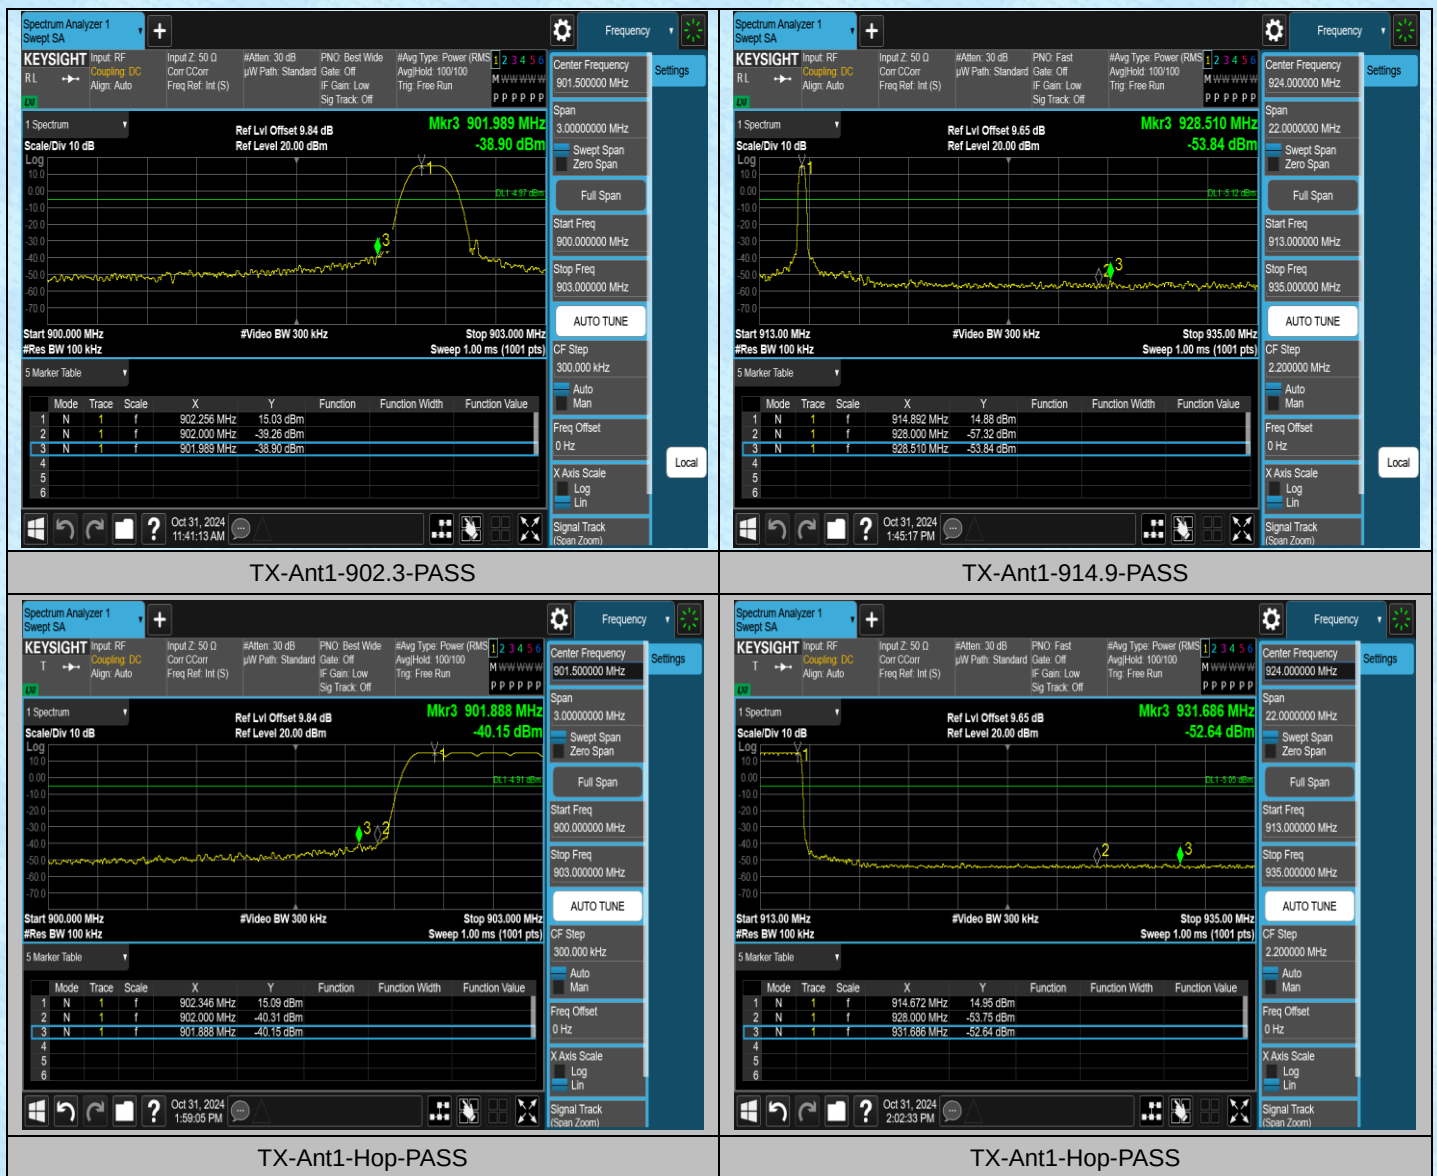



AppendixH:Conducted Spurious Emission

Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	902.3	0~Reference	15.03	15.03	---	PASS
TX	Ant1	902.3	30~10000	15.03	-50.72	≤-4.97	PASS
TX	Ant1	906	0~Reference	15.04	15.04	---	PASS
TX	Ant1	906	30~10000	15.04	-53.39	≤-4.96	PASS
TX	Ant1	914.9	0~Reference	14.88	14.88	---	PASS
TX	Ant1	914.9	30~10000	14.88	-56.39	≤-5.12	PASS

Test Graphs

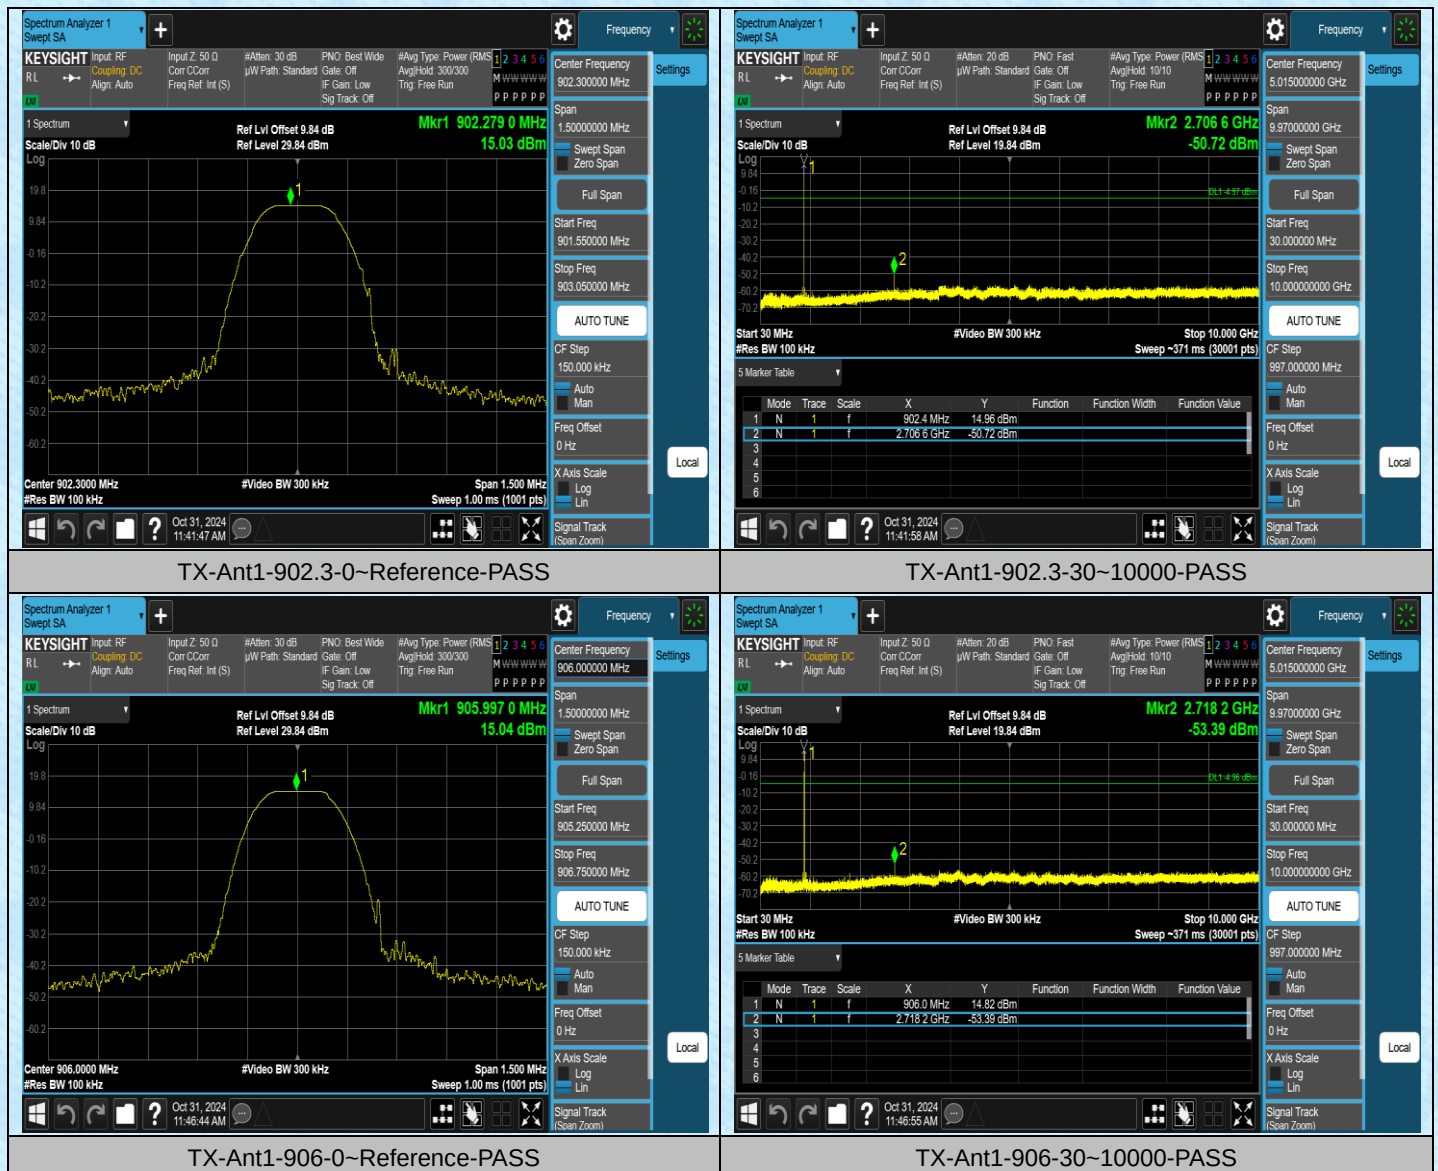

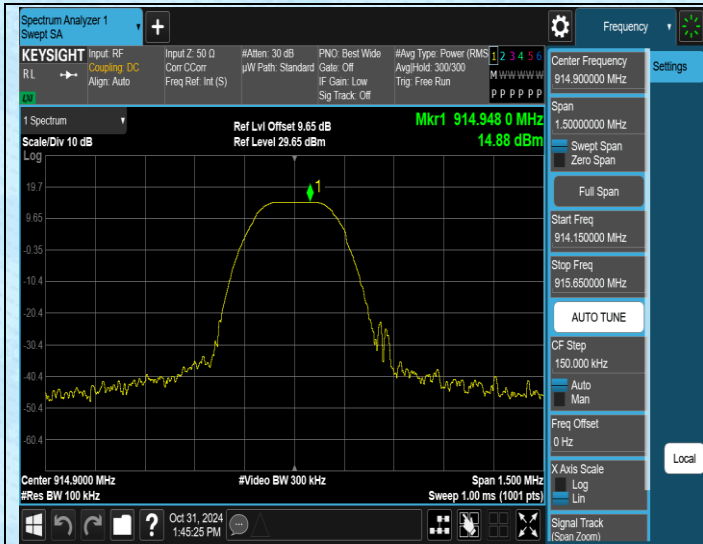

TX-Ant1-914.9-0~Reference-PASS

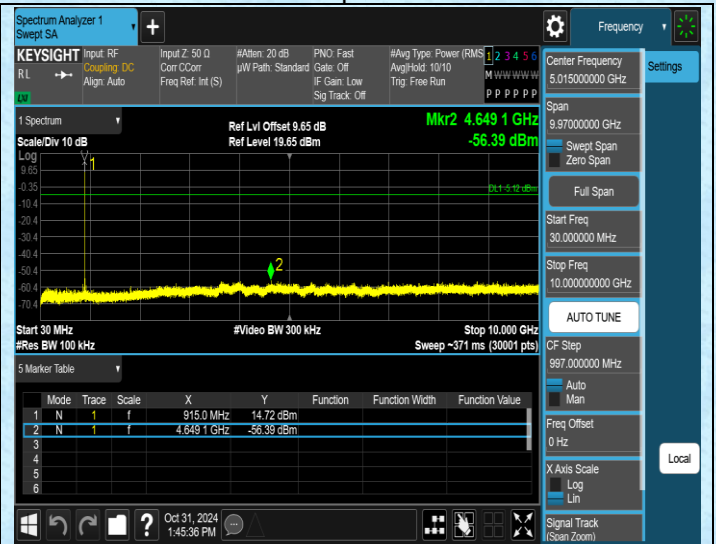


TX-Ant1-914.9-30~10000-PASS

AppendixI: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
TX	Ant1	902.3	102.00	608.00	16.78	---	---
TX	Ant1	906	102.00	608.00	16.78	---	---
TX	Ant1	914.9	102.00	608.00	16.78	---	---

Test Graphs

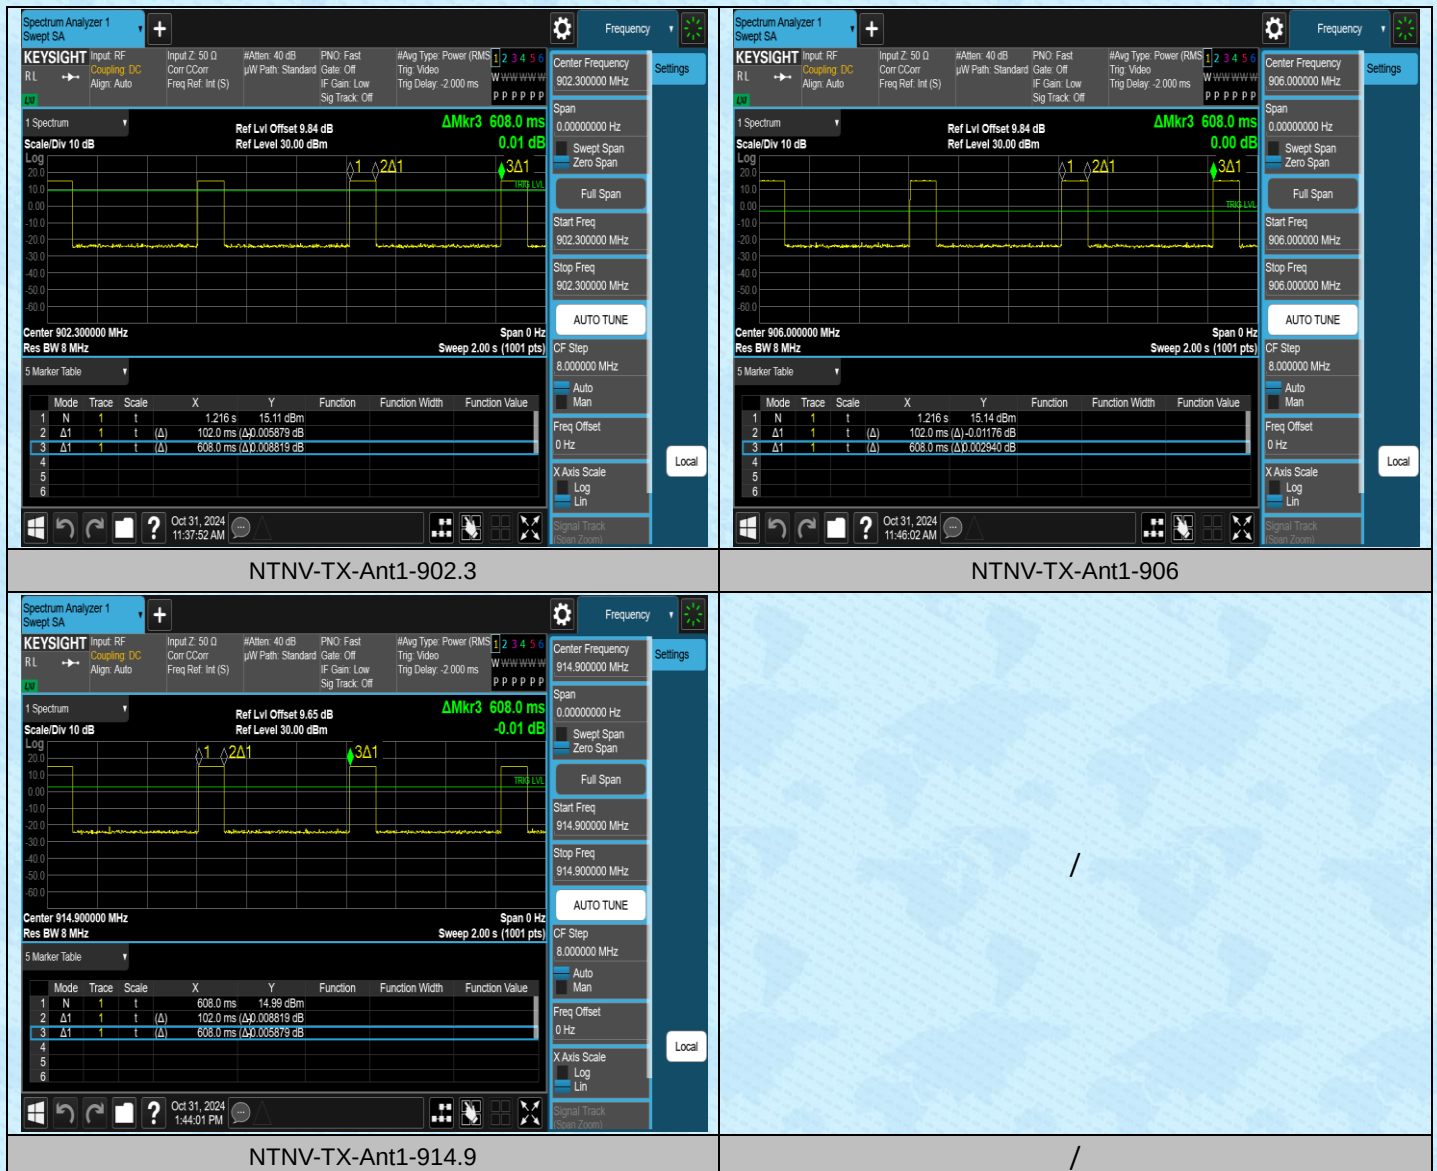

---End---