




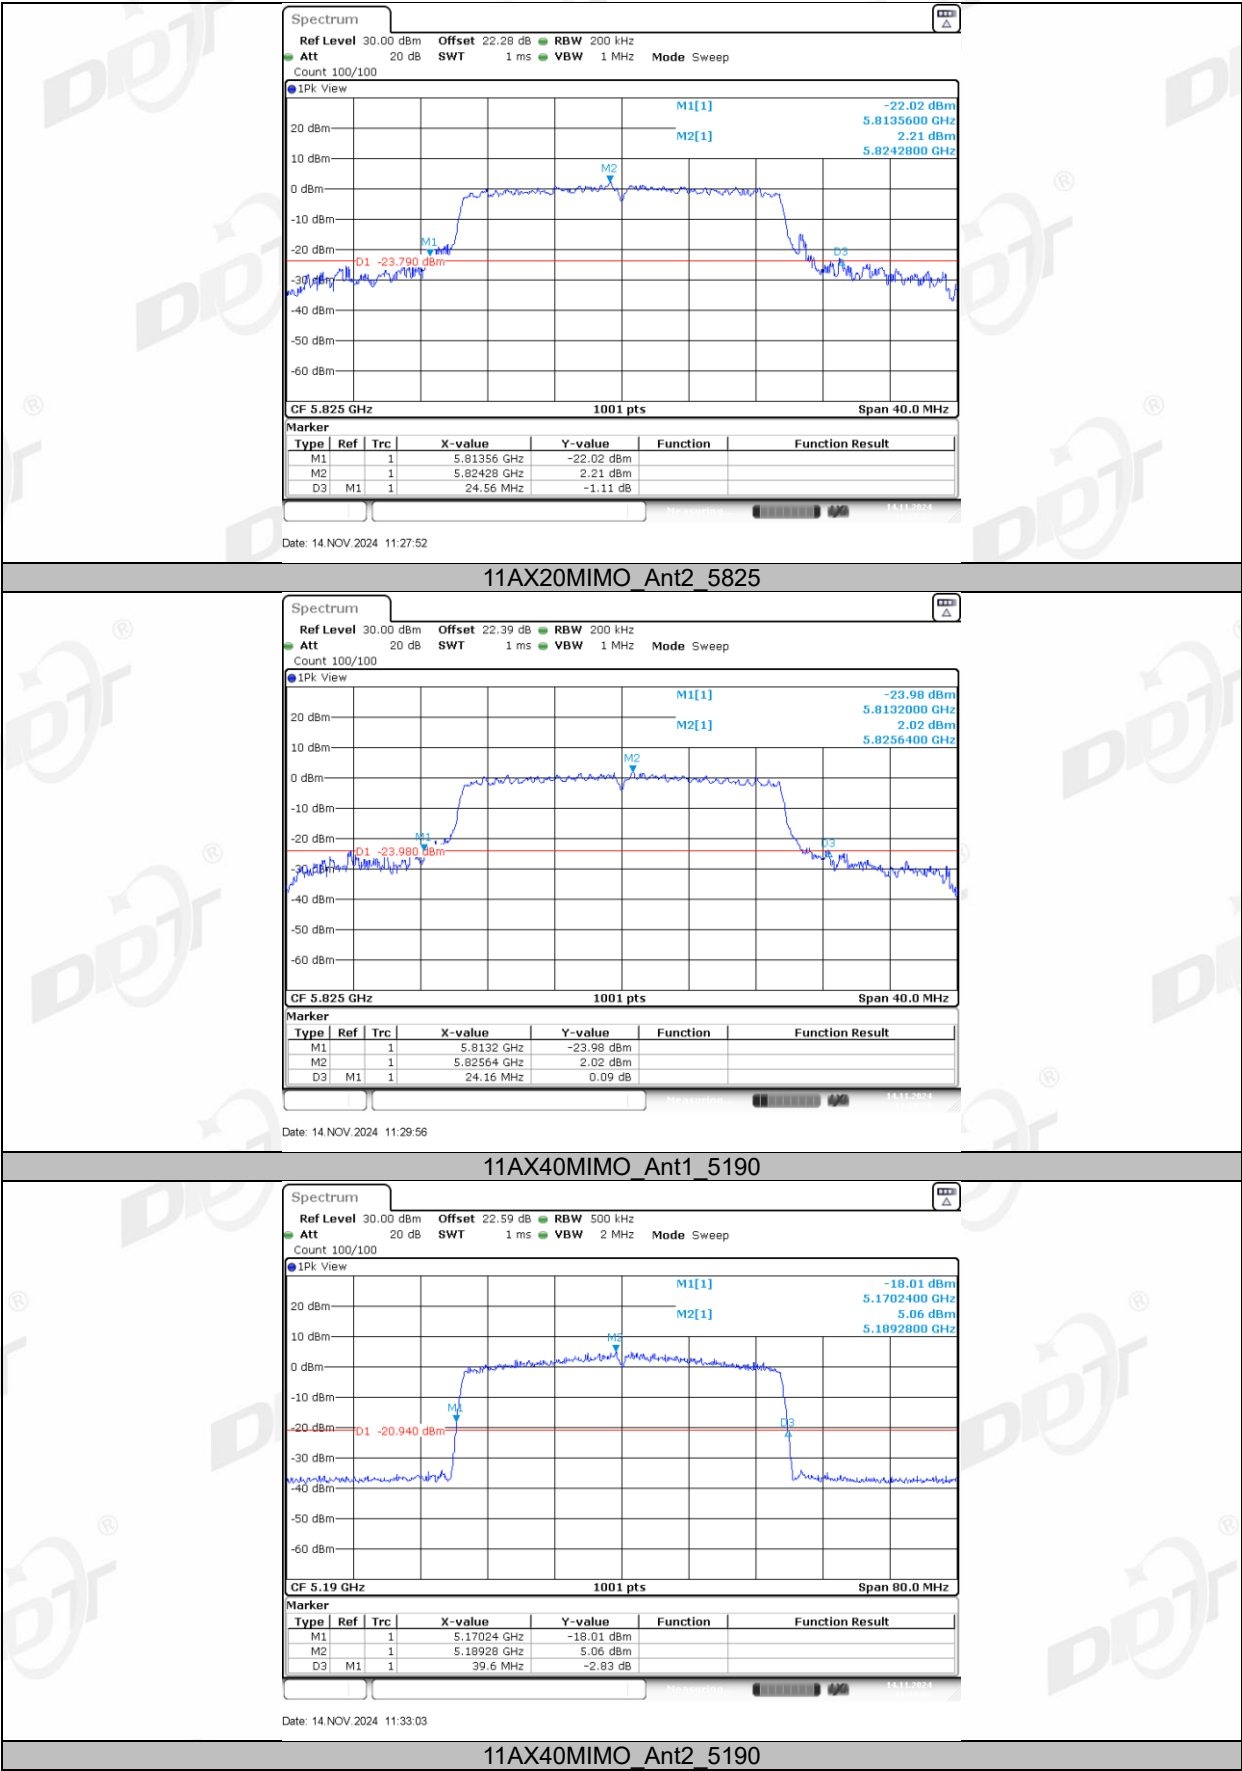


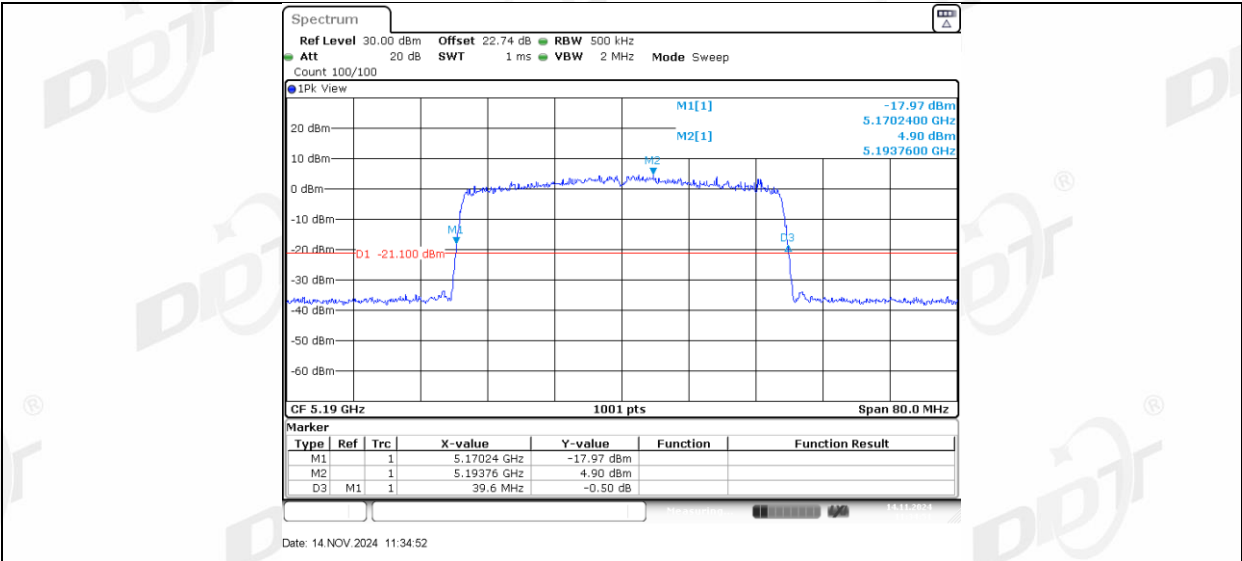

11AX40MIMO_Ant1_5230

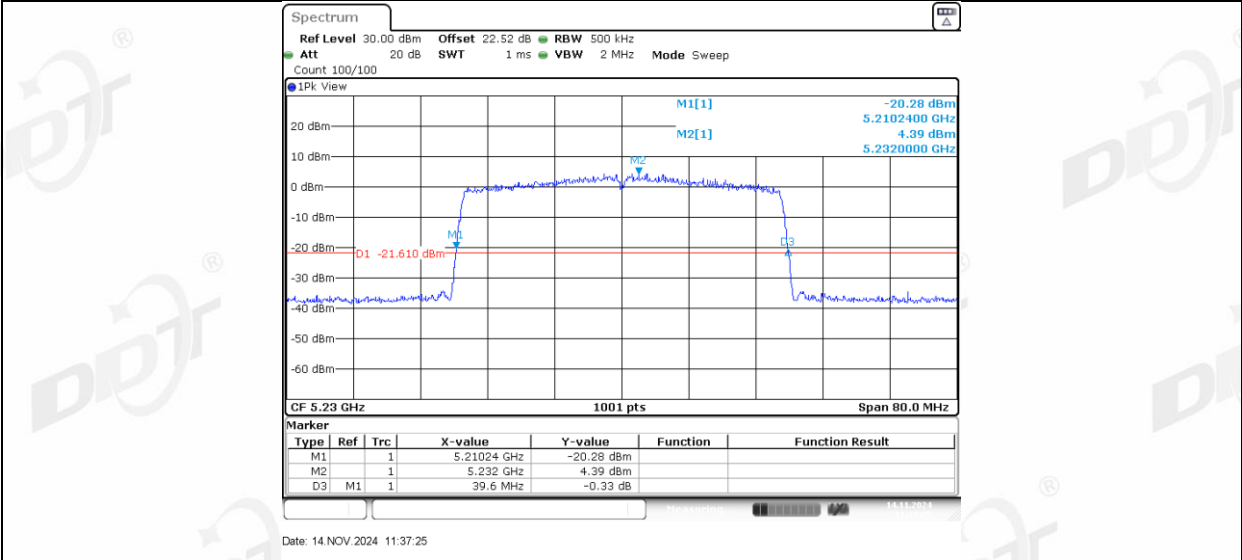

11AX40MIMO_Ant2_5230

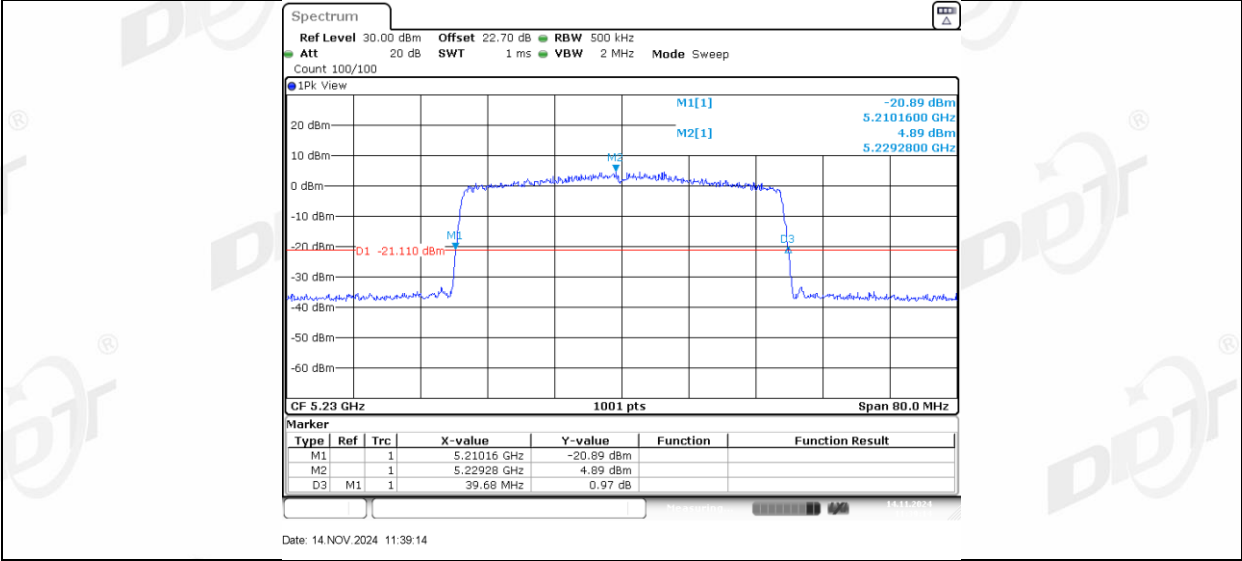


11AX40MIMO_Ant1_5270









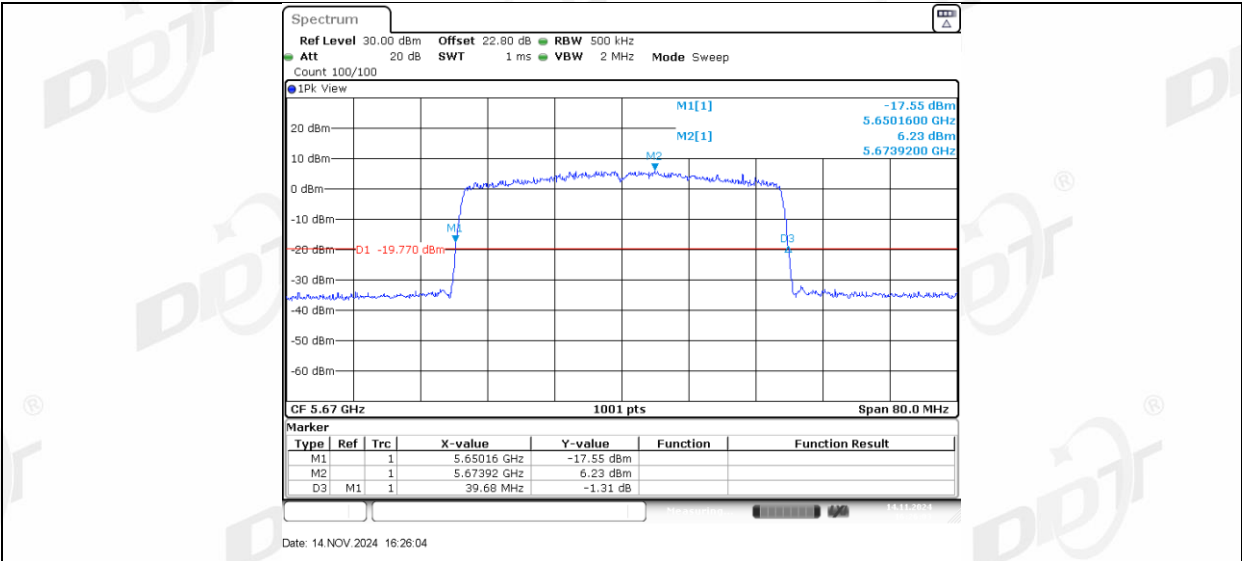

11AX40MIMO_Ant1_5710

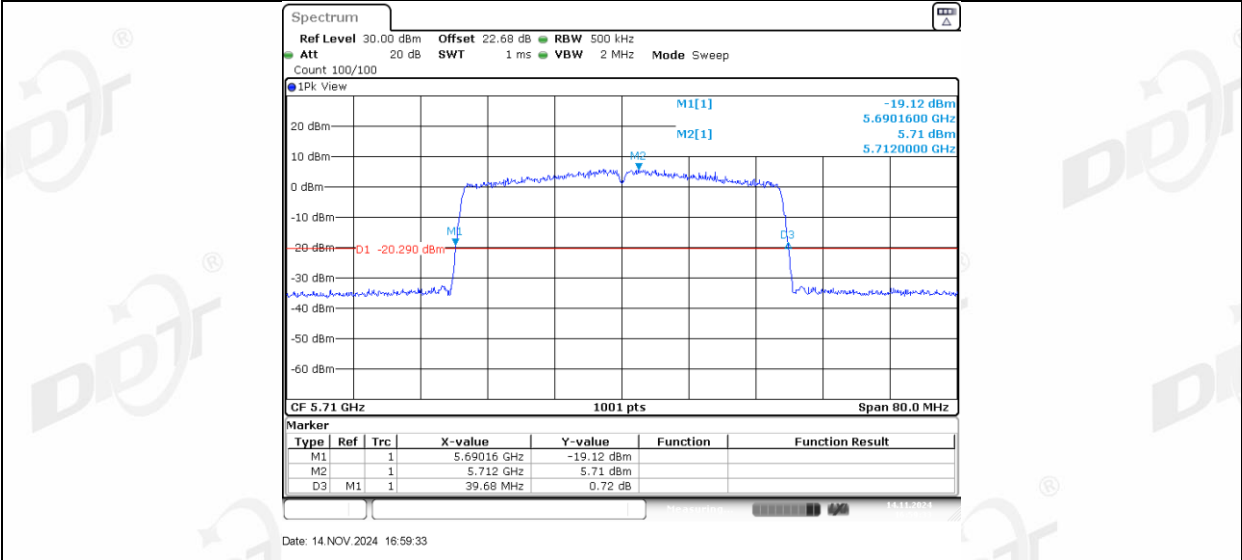


11AX40MIMO_Ant2_5710

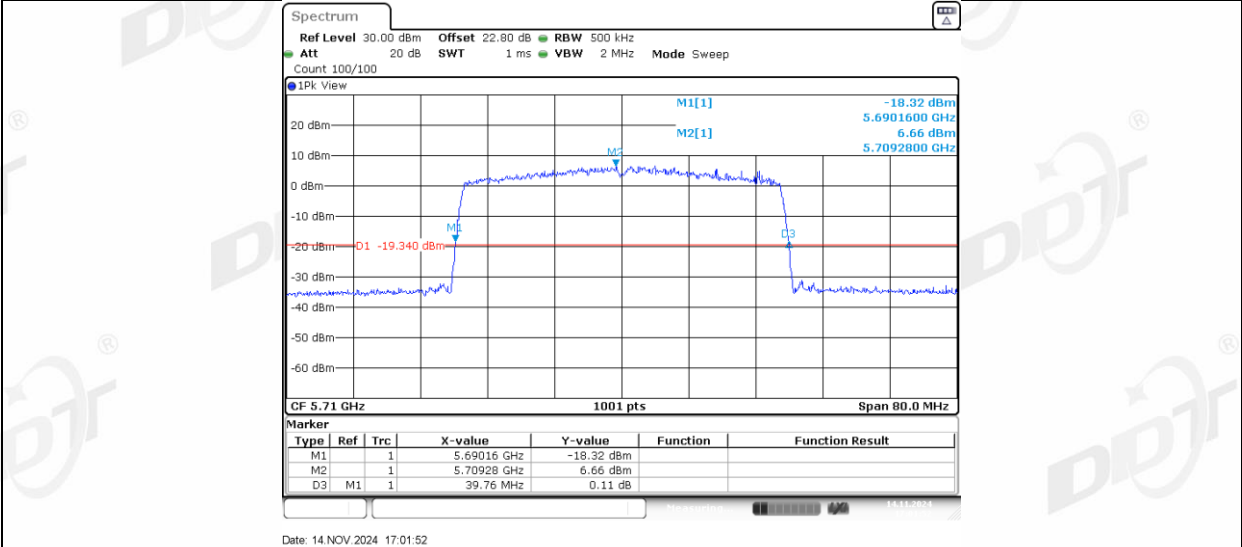


11AX40MIMO_Ant1_5755



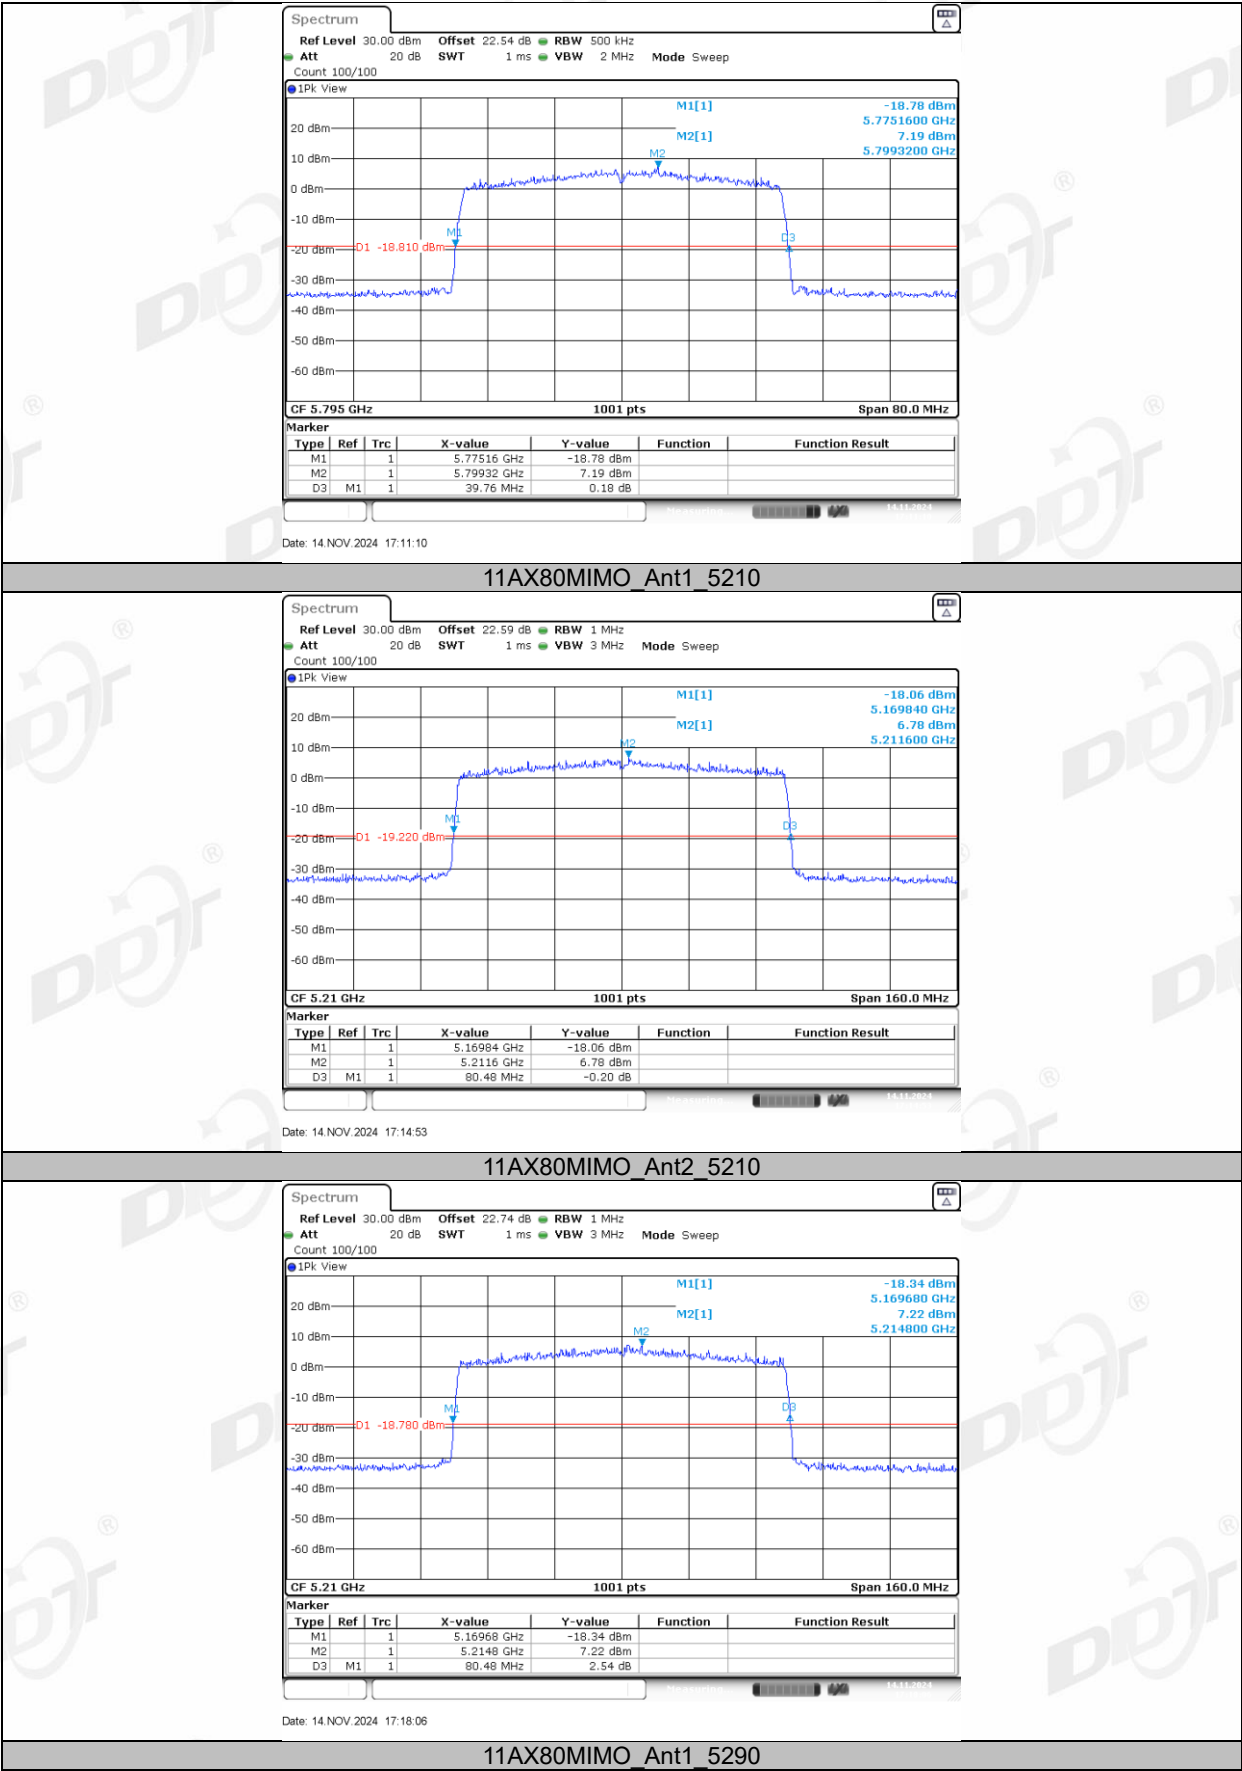







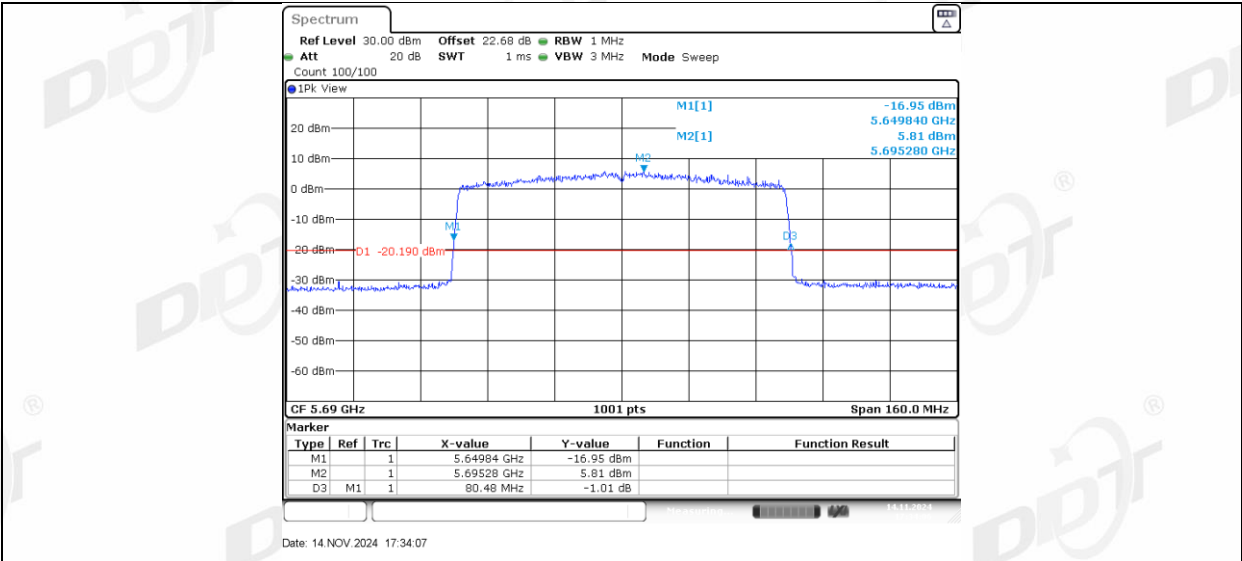


11AX80MIMO_Ant2_5690

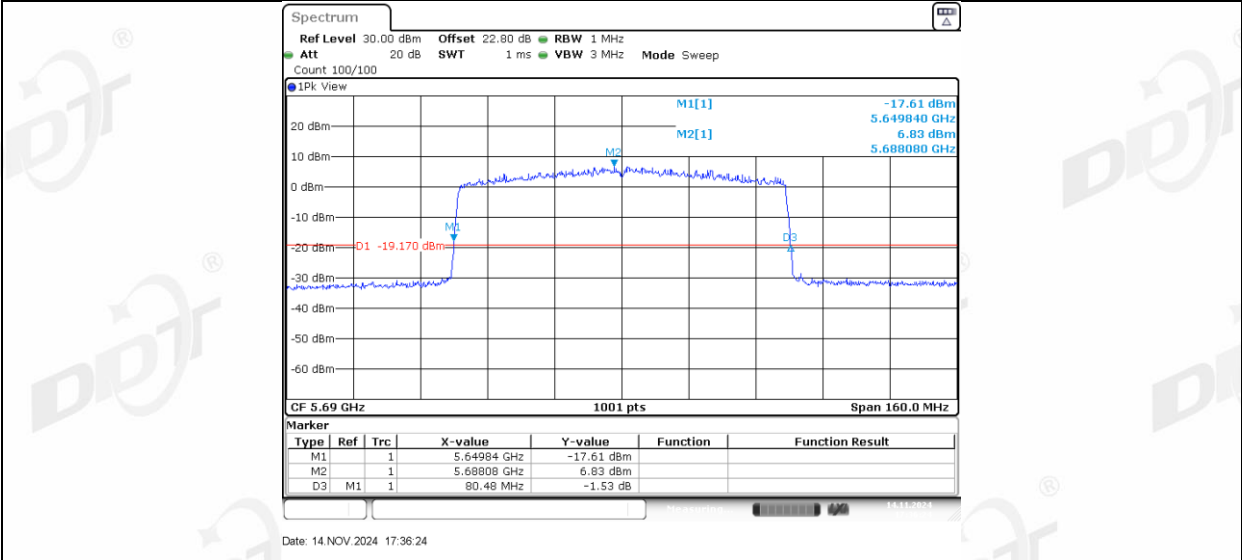

11AX80MIMO_Ant1_5775

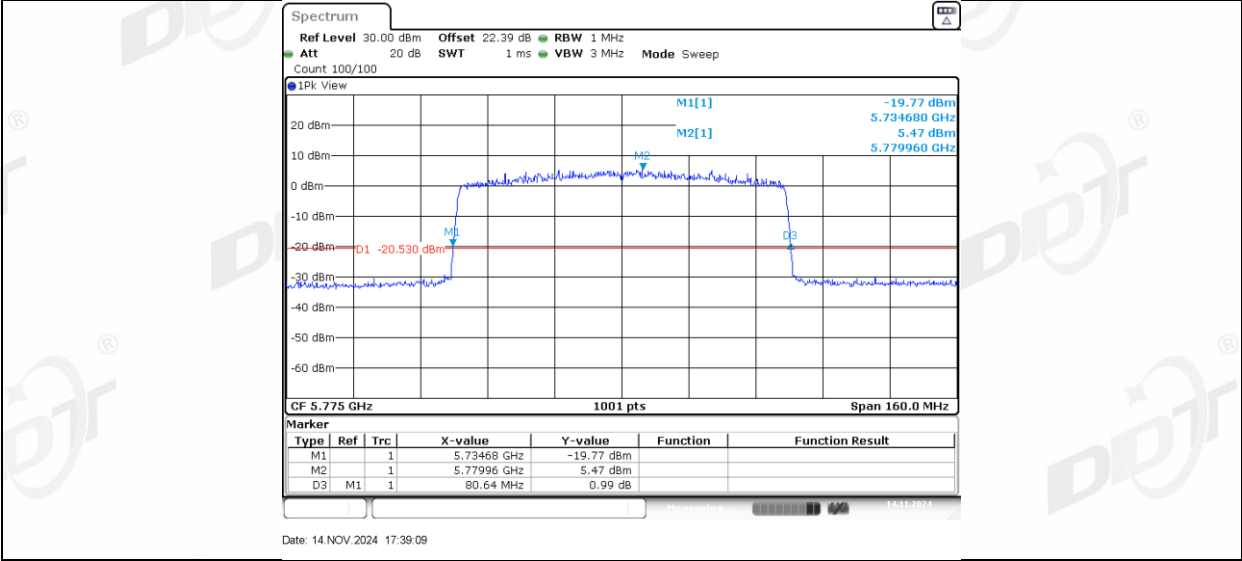


11AX80MIMO_Ant2_5775

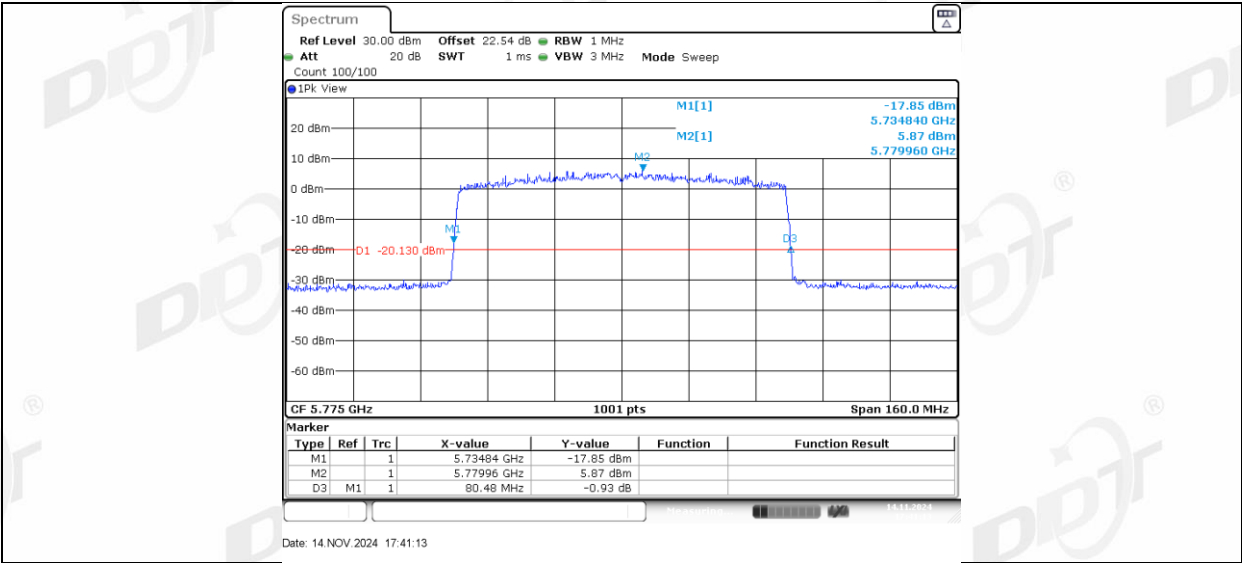

5. 6dB Bandwidth

5.1. Block diagram of test setup

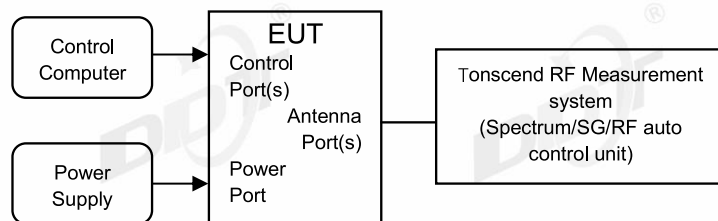

5.2. Limits

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
6 dB Bandwidth	Minimum 500 kHz	5725 - 5850

5.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: RBW=100 kHz For 26 dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6 dB Bandwidth: VBW=300 kHz For 26 dB Bandwidth: >3 RBW
Trace	Max hold
Sweep	Auto couple


Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


5.4. Test result B4

Test Engineer:	Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3-26.5℃,43.0-55.1%RH	Test Date:	2024.11.12-2024.12.09
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24111411-004


Test Mode	Antenna	Frequency [MHz]	6db EBW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11A	Ant1	5745	16.28	5736.84	5753.12	0.5	PASS
	Ant2	5745	16.00	5737.08	5753.08	0.5	PASS
	Ant1	5785	16.28	5776.84	5793.12	0.5	PASS
	Ant2	5785	16.28	5776.84	5793.12	0.5	PASS
	Ant1	5825	16.28	5816.84	5833.12	0.5	PASS
	Ant2	5825	16.28	5816.84	5833.12	0.5	PASS
11N20MIMO	Ant1	5745	16.32	5736.80	5753.12	0.5	PASS
	Ant2	5745	17.28	5736.48	5753.76	0.5	PASS
	Ant1	5785	16.92	5776.84	5793.76	0.5	PASS
	Ant2	5785	17.56	5776.20	5793.76	0.5	PASS
	Ant1	5825	16.96	5816.80	5833.76	0.5	PASS
	Ant2	5825	17.56	5816.20	5833.76	0.5	PASS
11N40MIMO	Ant1	5755	35.04	5737.48	5772.52	0.5	PASS
	Ant2	5755	35.04	5737.48	5772.52	0.5	PASS
	Ant1	5795	35.04	5777.48	5812.52	0.5	PASS
	Ant2	5795	35.04	5777.48	5812.52	0.5	PASS
11AC20MIMO	Ant1	5745	17.24	5736.48	5753.72	0.5	PASS
	Ant2	5745	17.56	5736.20	5753.76	0.5	PASS
	Ant1	5785	17.28	5776.48	5793.76	0.5	PASS
	Ant2	5785	17.56	5776.20	5793.76	0.5	PASS
	Ant1	5825	16.88	5816.60	5833.48	0.5	PASS
	Ant2	5825	17.56	5816.20	5833.76	0.5	PASS
11AC40MIMO	Ant1	5755	35.04	5737.48	5772.52	0.5	PASS
	Ant2	5755	35.04	5737.48	5772.52	0.5	PASS
	Ant1	5795	35.04	5777.48	5812.52	0.5	PASS
	Ant2	5795	35.04	5777.48	5812.52	0.5	PASS
11AC80MIMO	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS
	Ant2	5775	75.20	5737.40	5812.60	0.5	PASS
11AX20MIMO	Ant1	5745	18.48	5735.80	5754.28	0.5	PASS
	Ant2	5745	18.16	5736.16	5754.32	0.5	PASS
	Ant1	5785	18.68	5775.80	5794.48	0.5	PASS
	Ant2	5785	18.44	5775.84	5794.28	0.5	PASS
	Ant1	5825	18.68	5815.72	5834.40	0.5	PASS
	Ant2	5825	18.96	5815.48	5834.44	0.5	PASS
11AX40MIMO	Ant1	5755	35.04	5737.48	5772.52	0.5	PASS
	Ant2	5755	35.04	5737.48	5772.52	0.5	PASS
	Ant1	5795	35.12	5777.48	5812.60	0.5	PASS
	Ant2	5795	35.12	5777.48	5812.60	0.5	PASS
11AX80MIMO	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS
	Ant2	5775	75.68	5737.40	5813.08	0.5	PASS

5.5. Test graphs B4

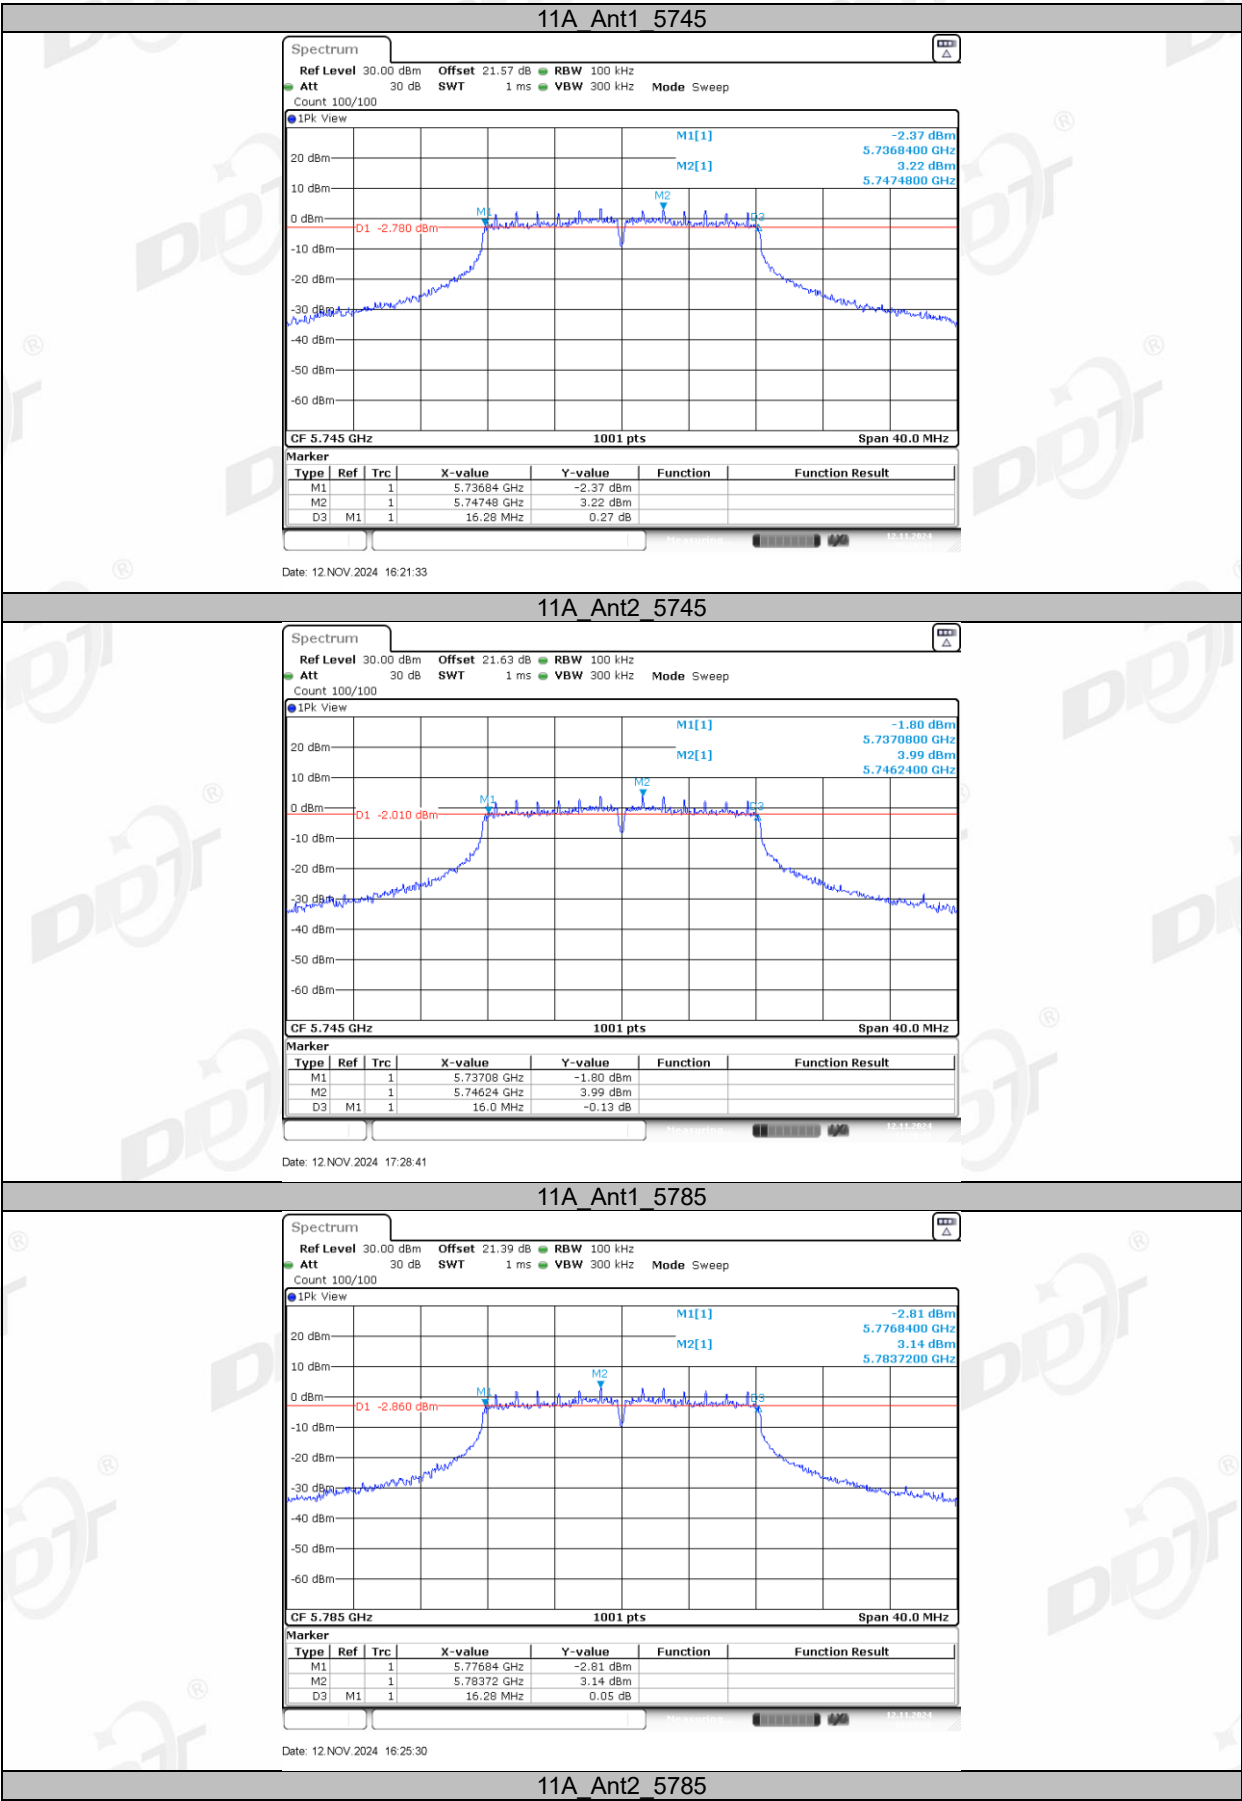


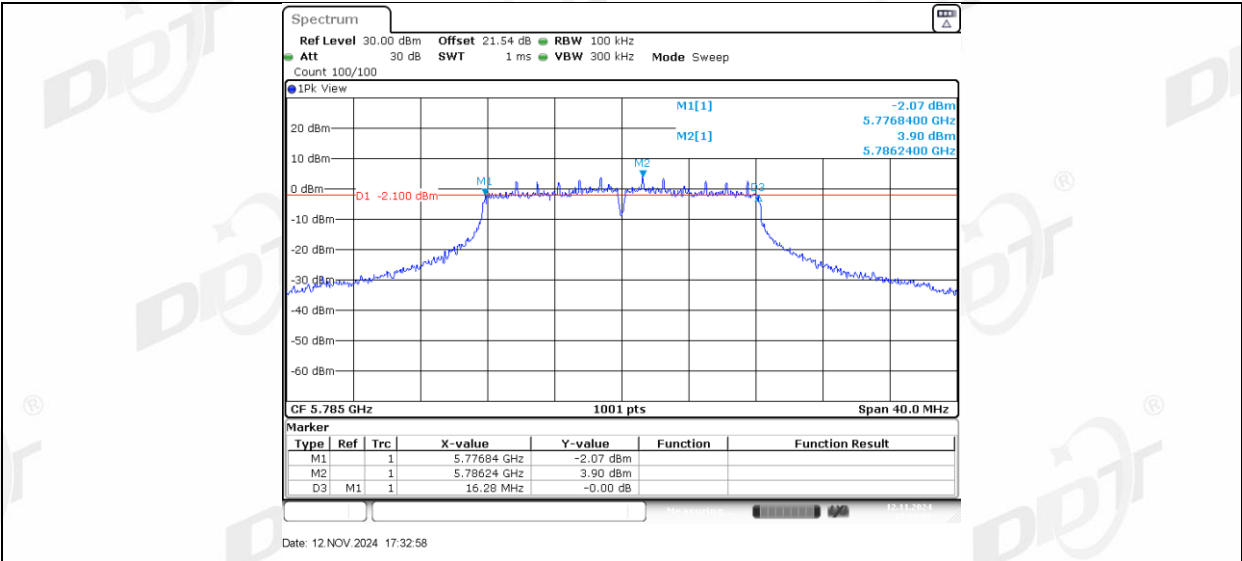


11A_Ant1_5825

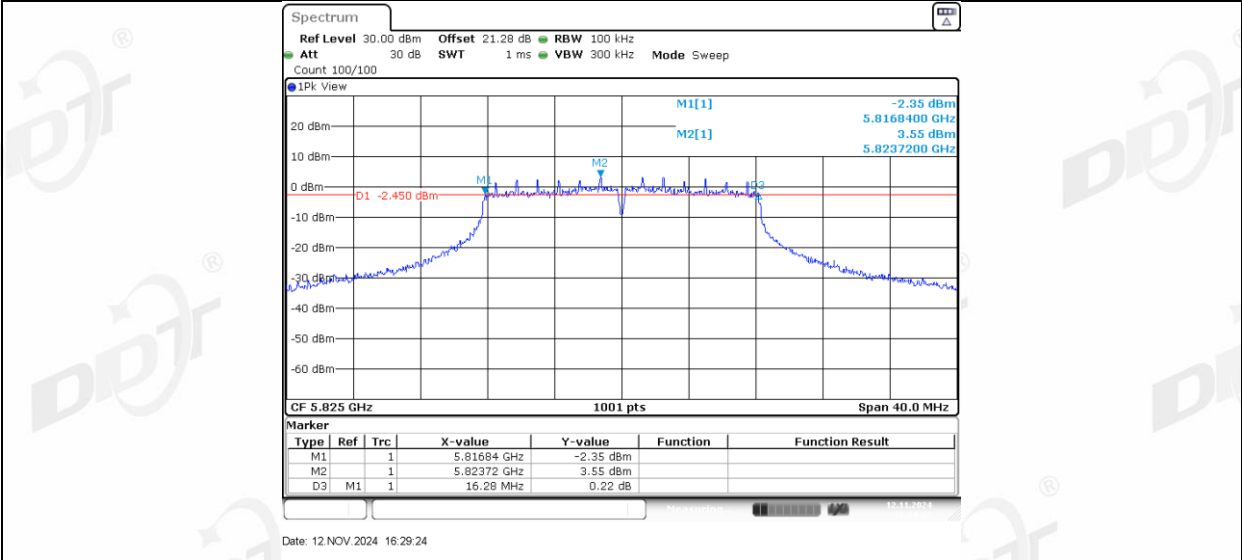


11A_Ant2_5825

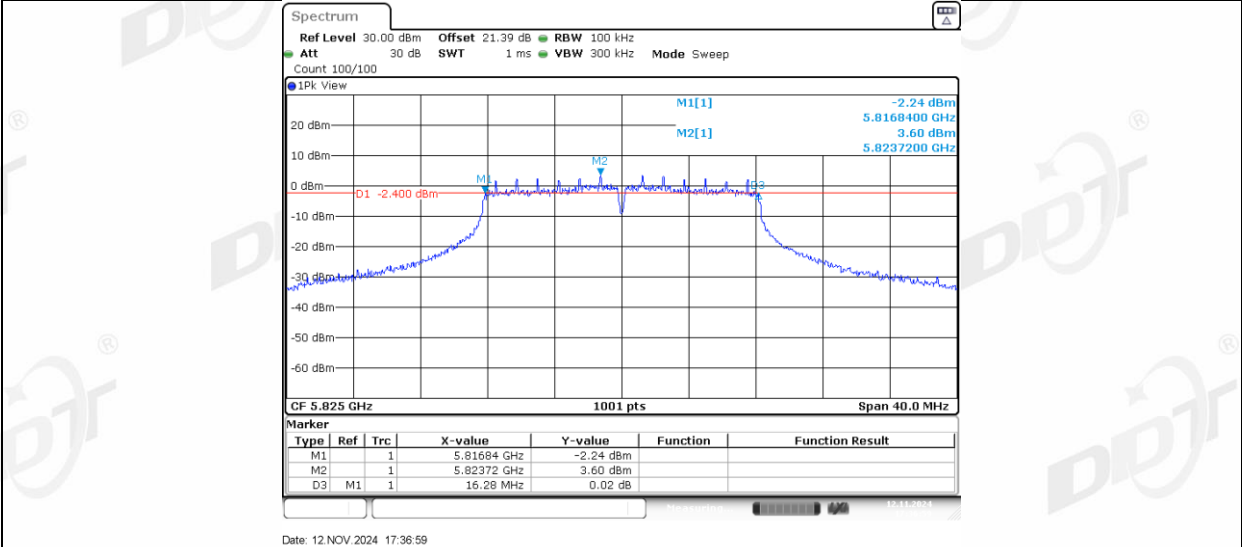


11N20MIMO_Ant1_5745

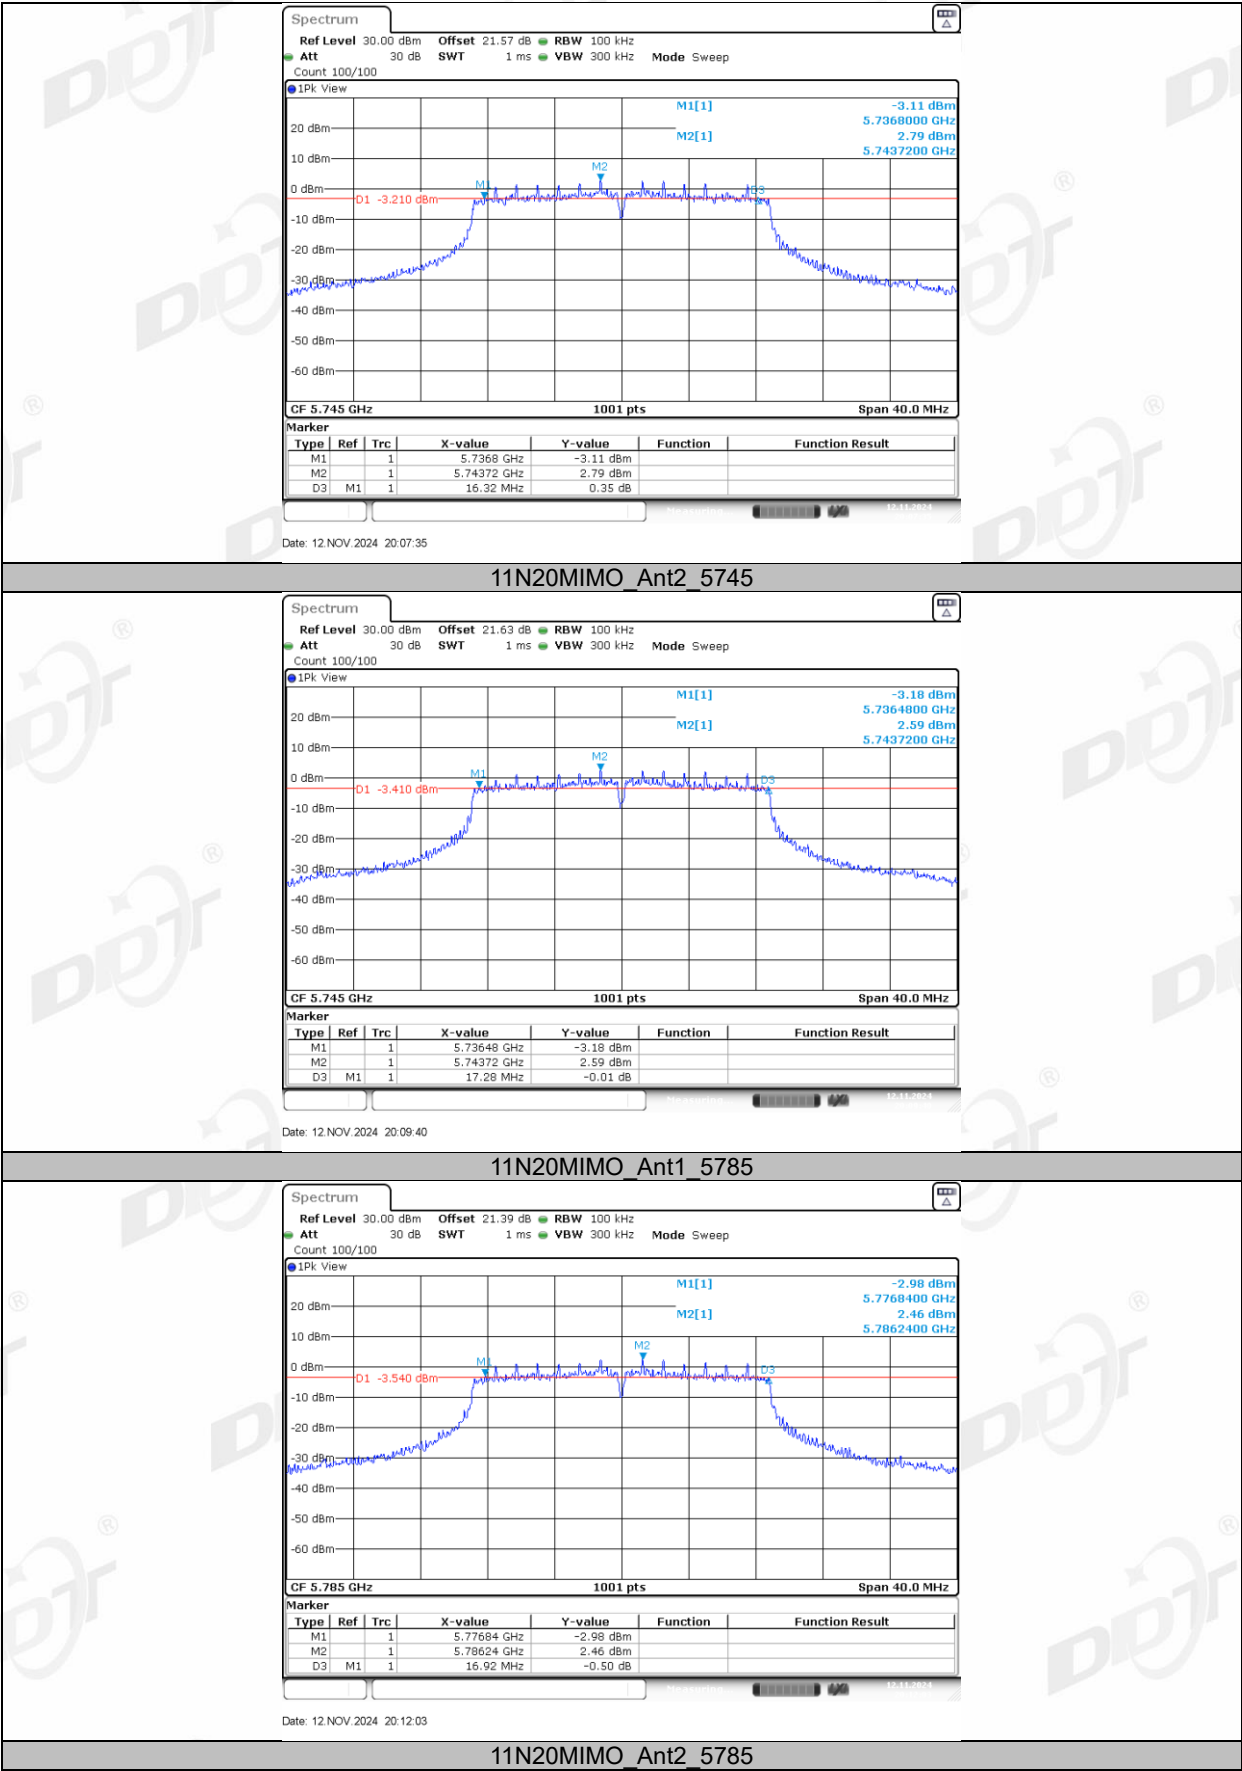


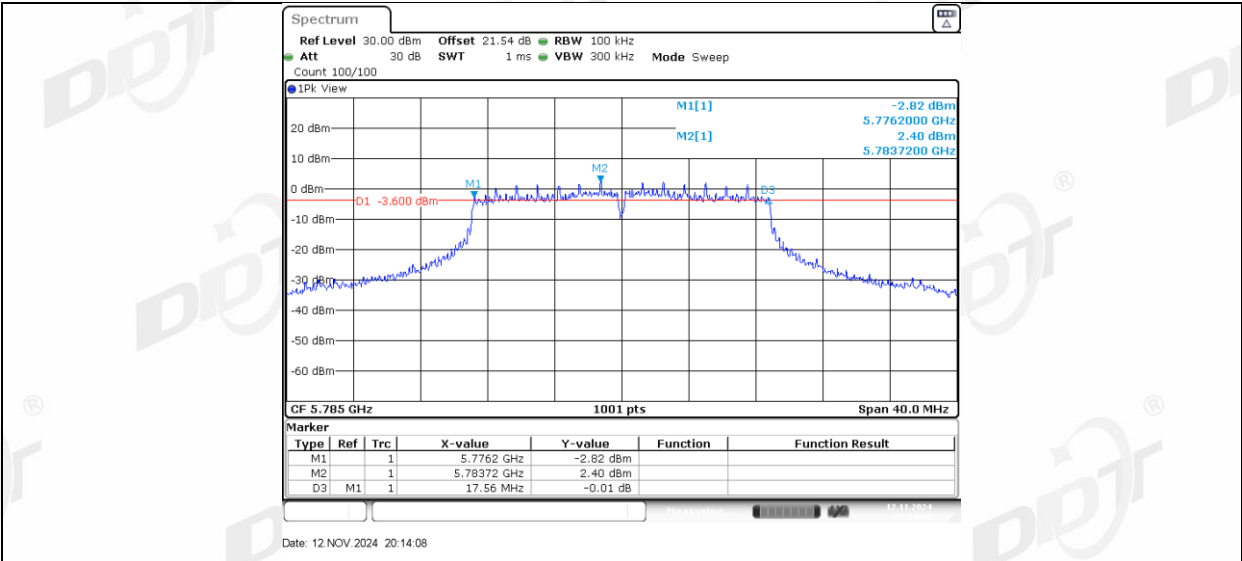


11N20MIMO_Ant1_5825

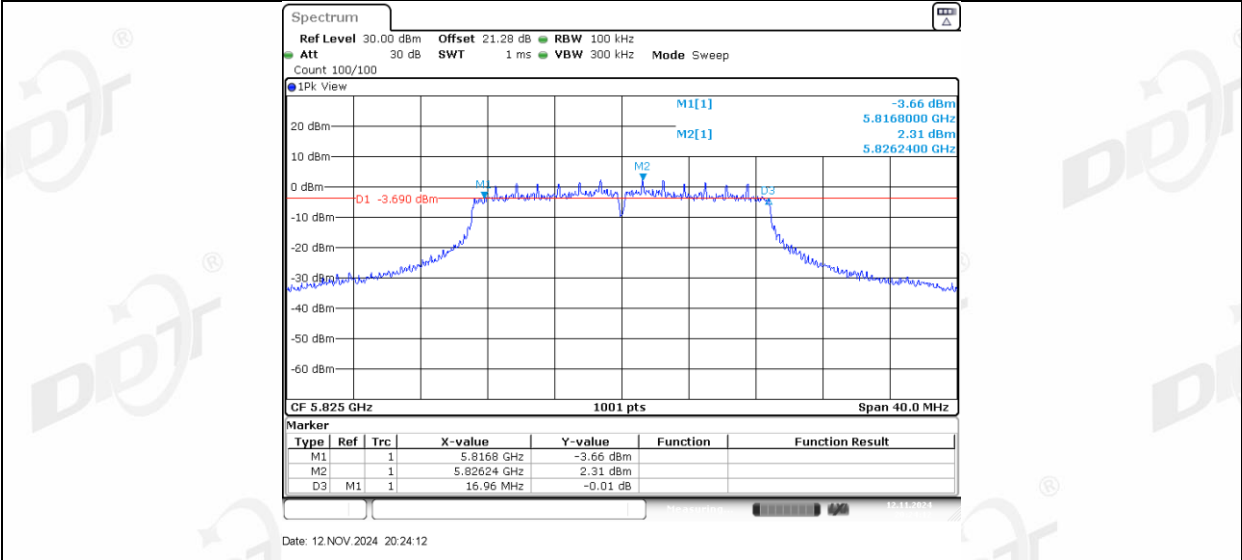


11N20MIMO_Ant2_5825

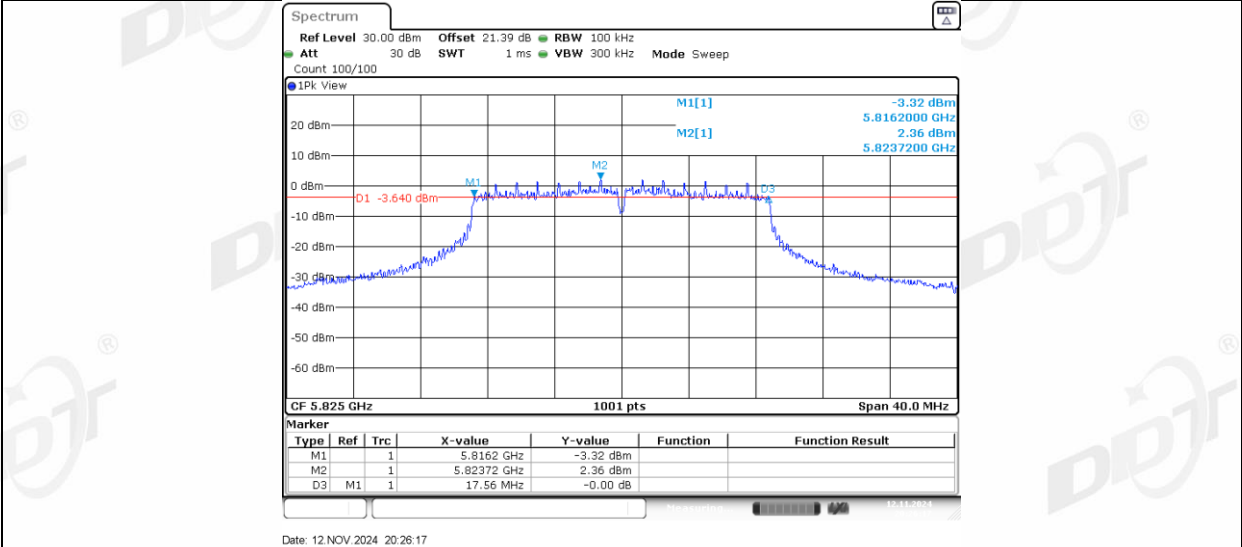


11N40MIMO_Ant1_5755

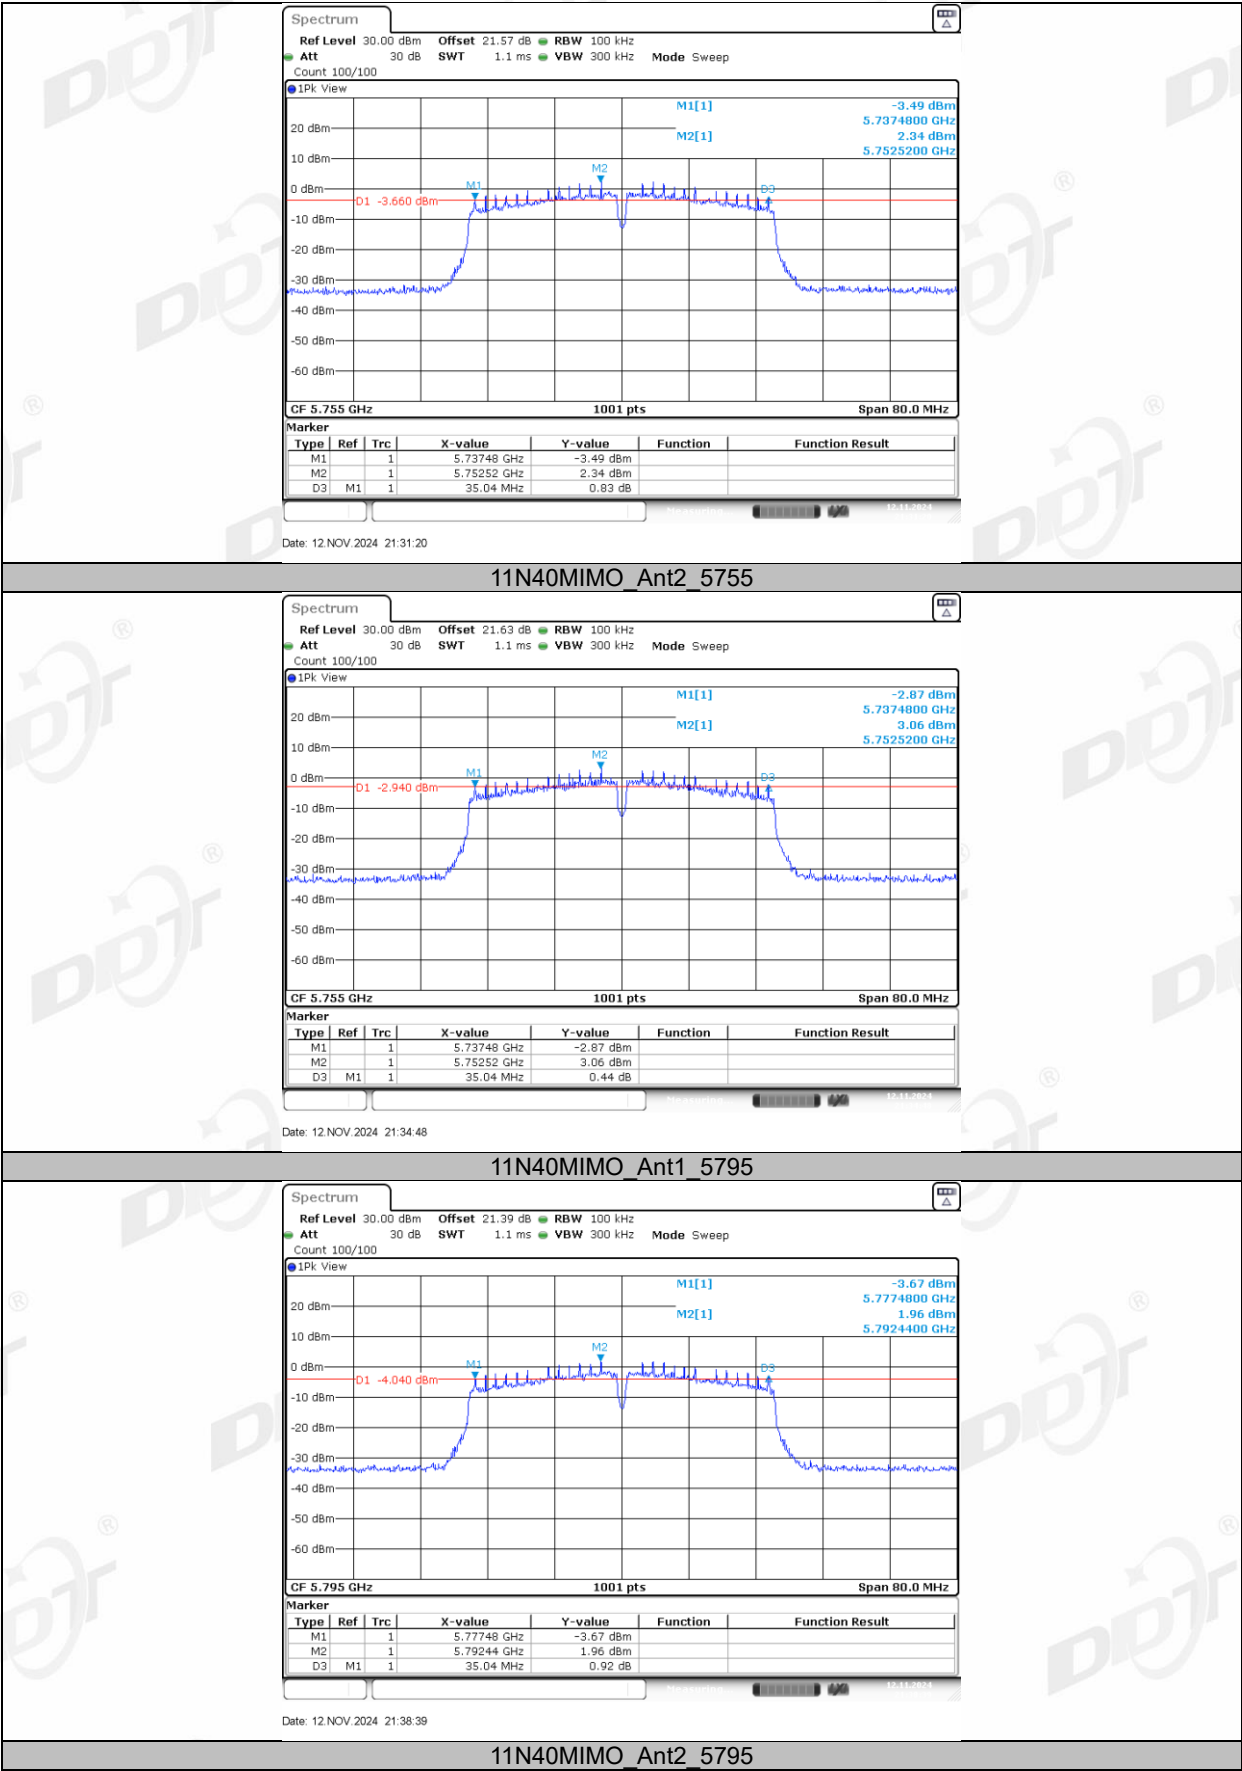


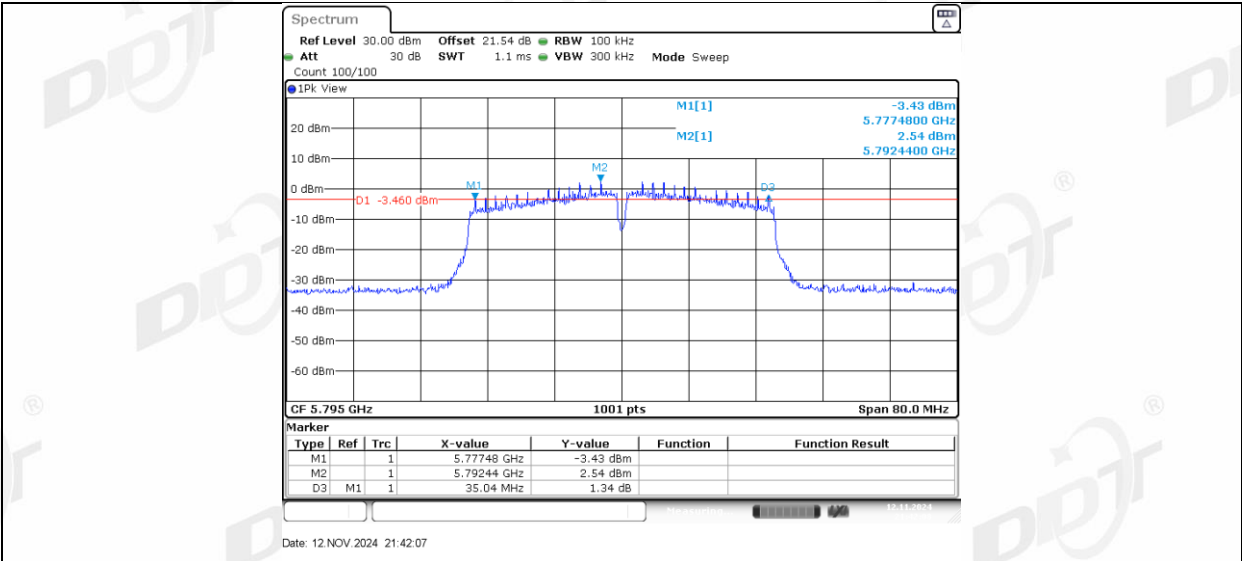


11AC20MIMO_Ant1_5745

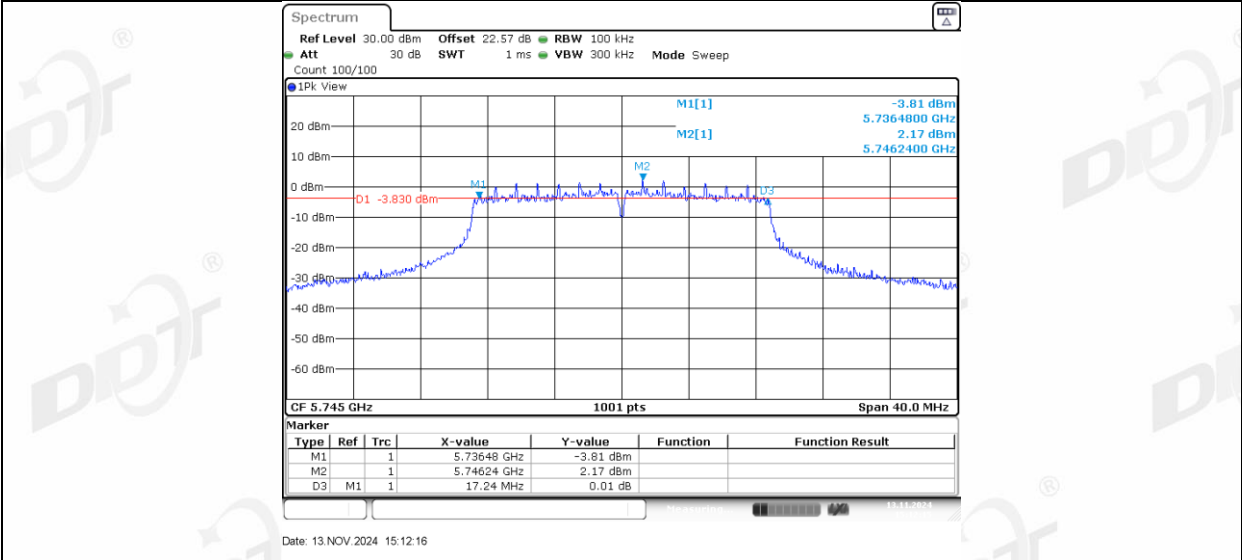


11AC20MIMO_Ant2_5745

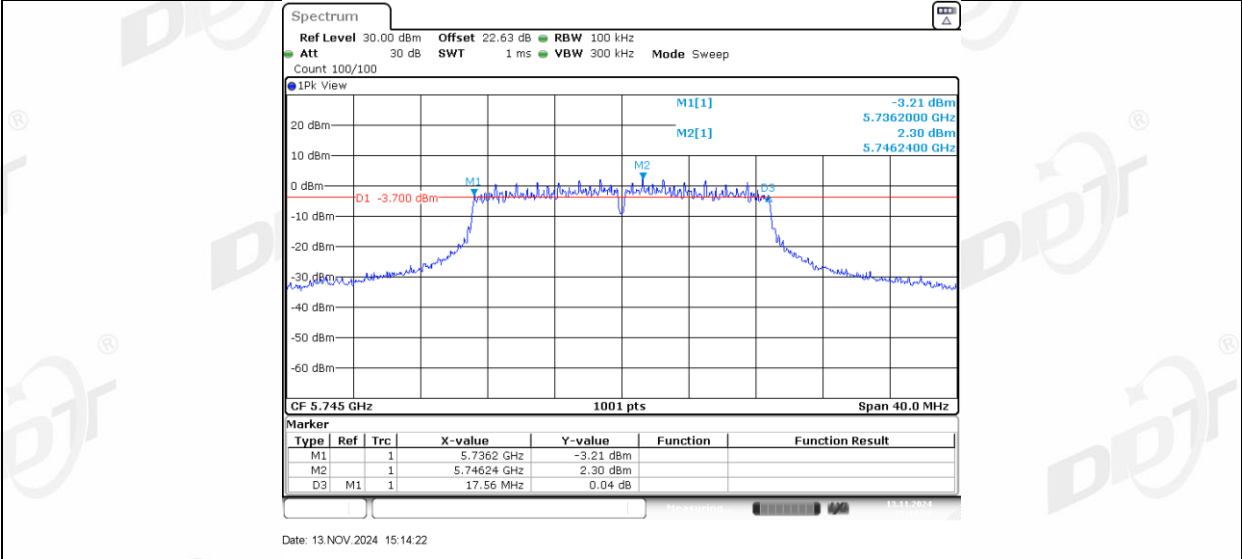


11AC20MIMO_Ant1_5785

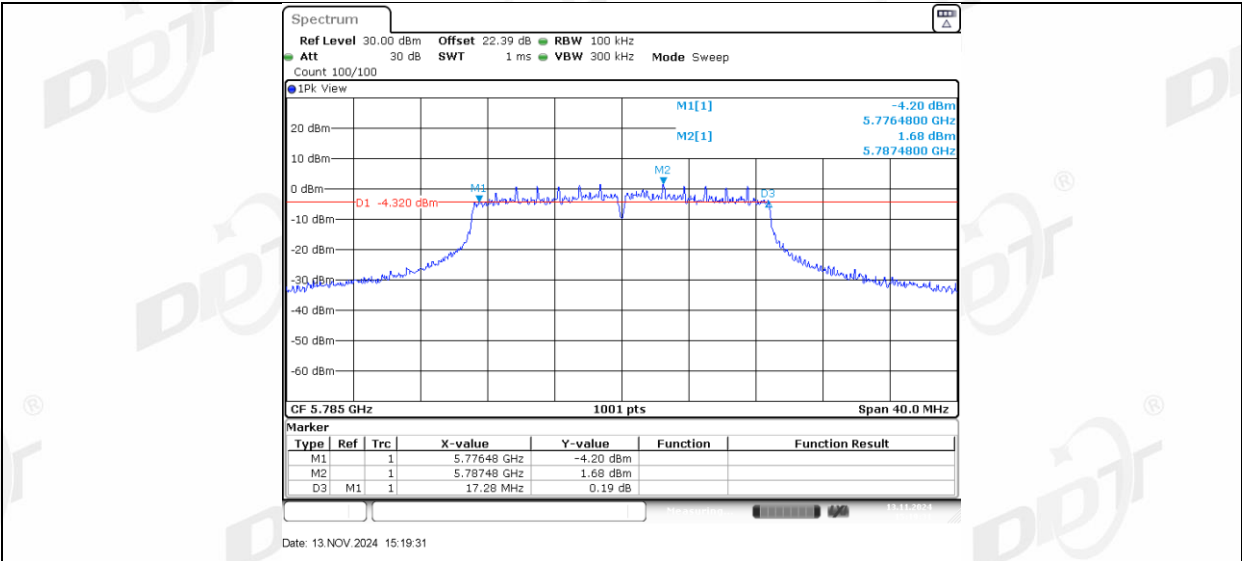


11AC20MIMO_Ant2_5785

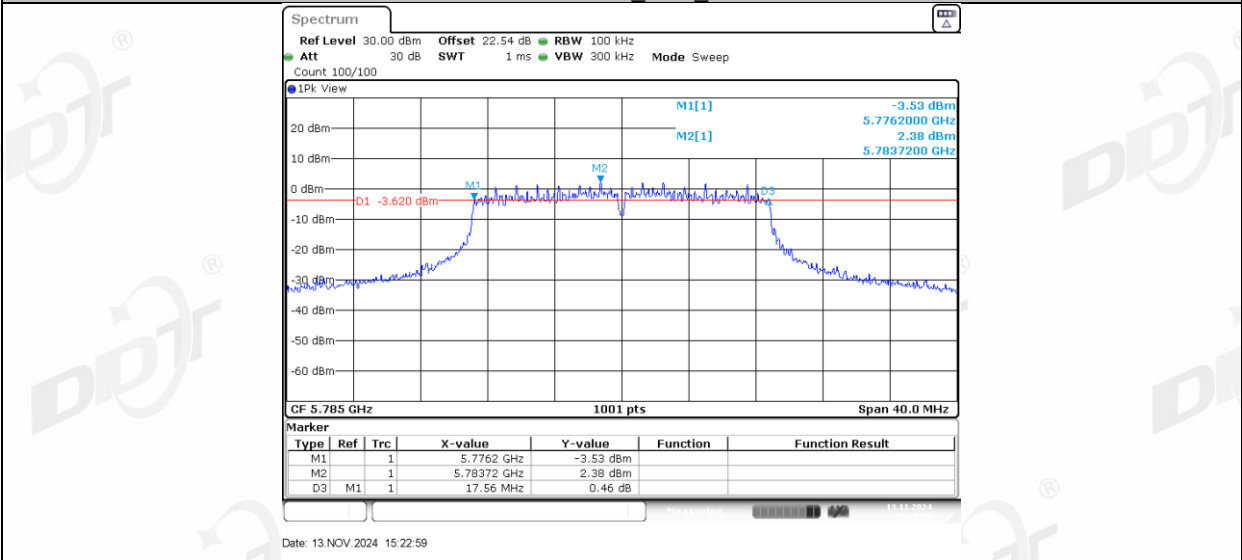


11AC20MIMO_Ant1_5825

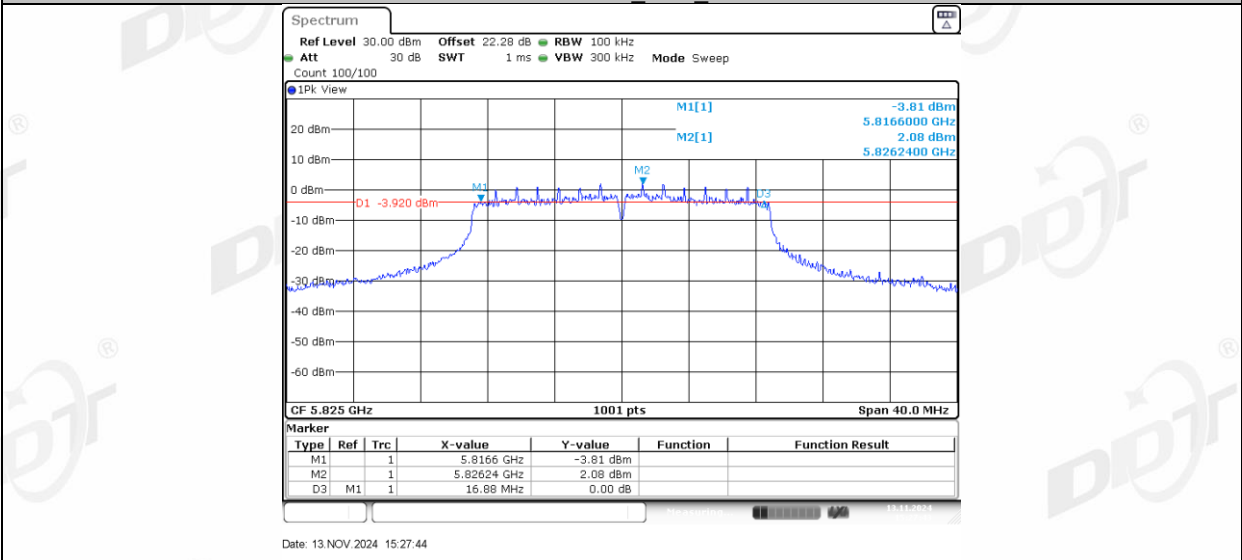


11AC20MIMO_Ant2_5825

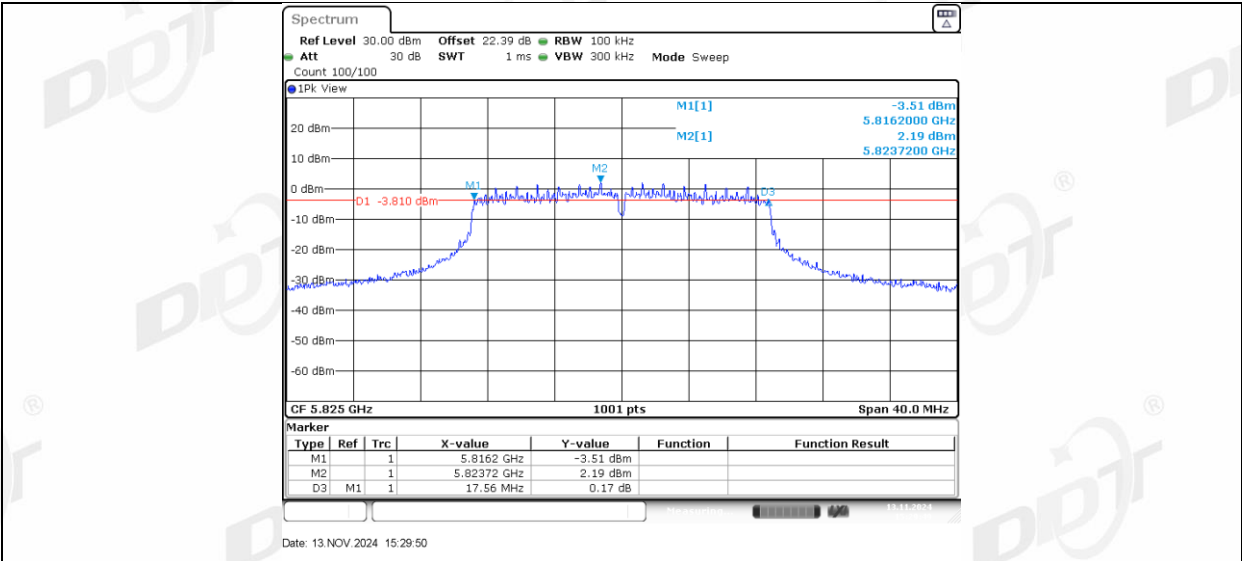


11AC40MIMO_Ant1_5755

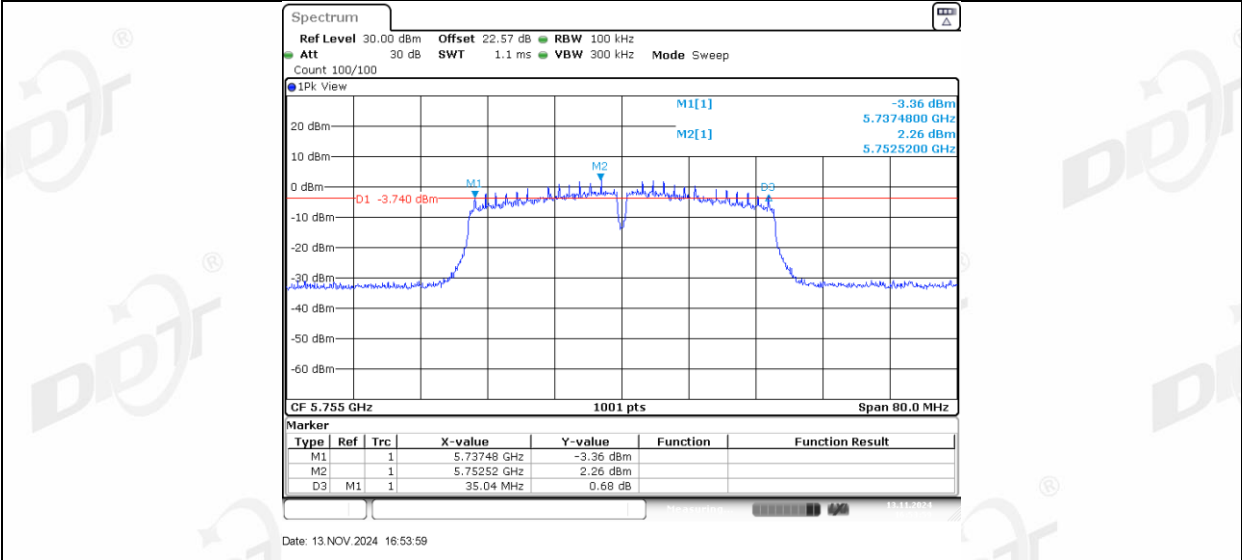


11AC40MIMO_Ant2_5755

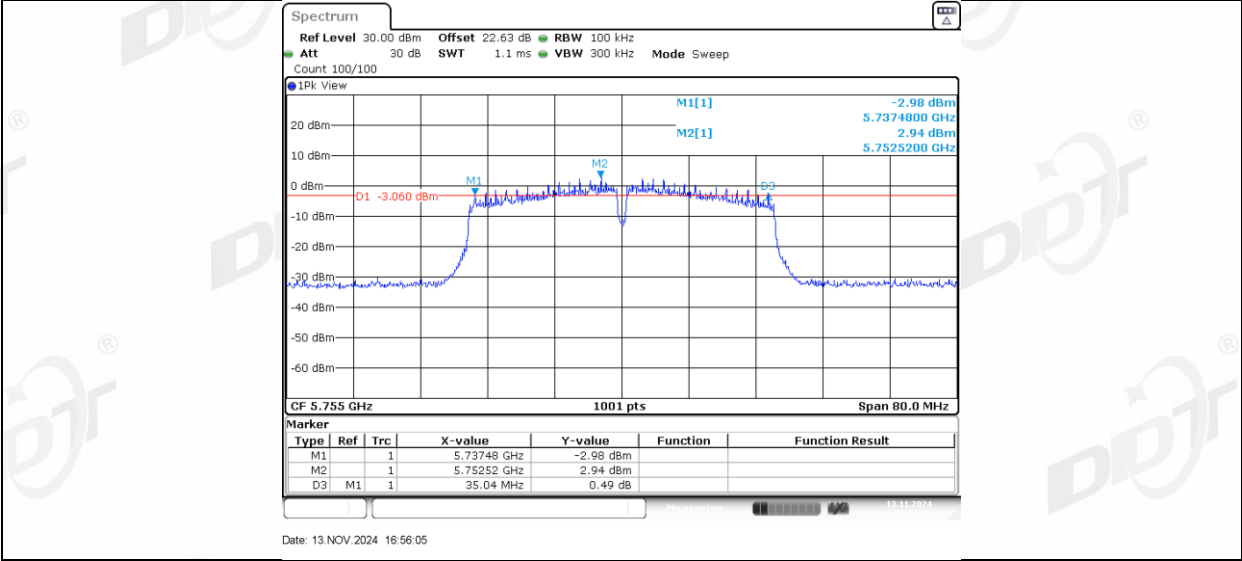


11AC40MIMO_Ant1_5795

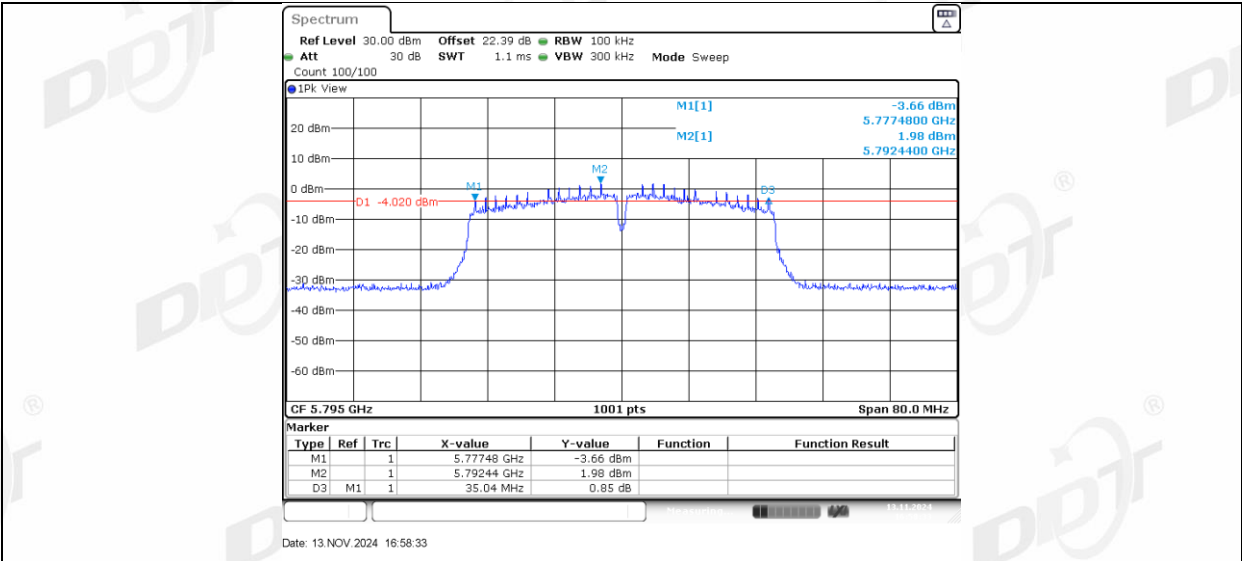


11AC40MIMO_Ant2_5795

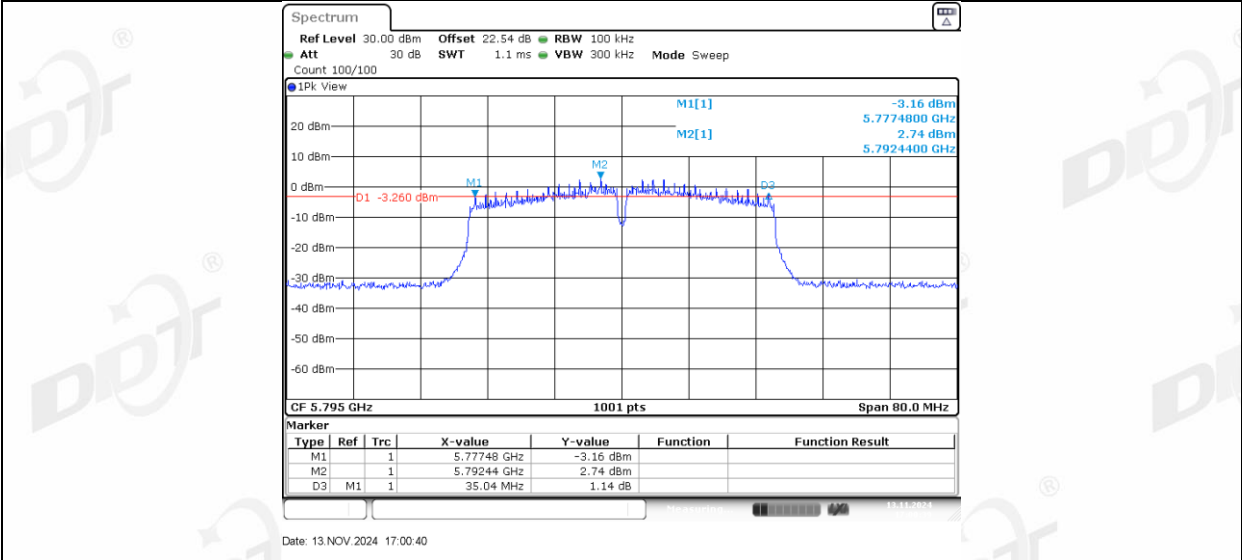


11AC80MIMO_Ant1_5775

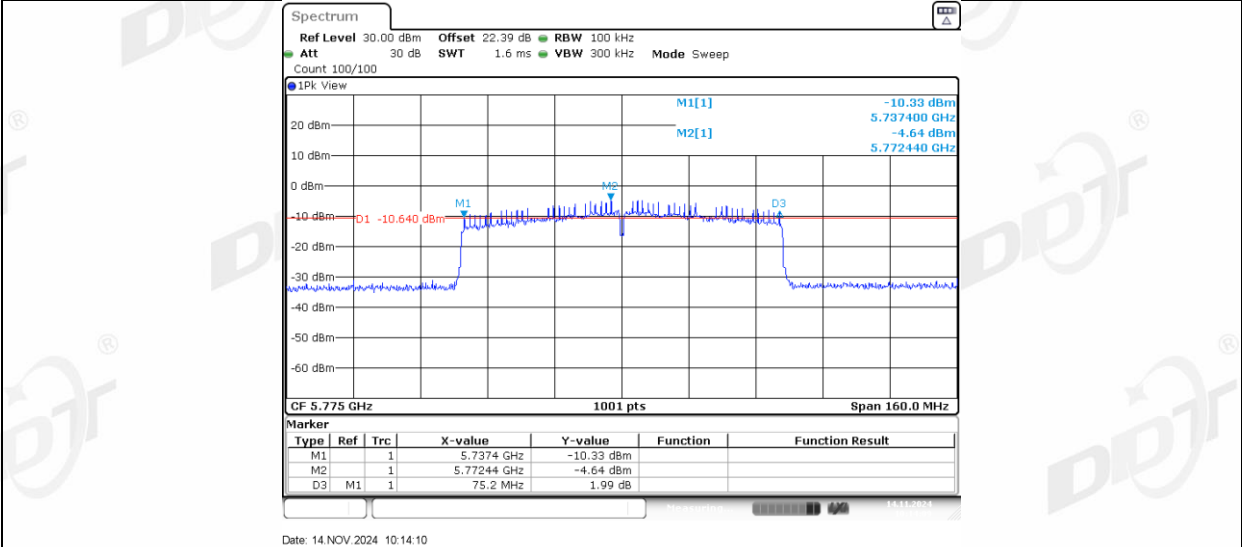


11AC80MIMO_Ant2_5775

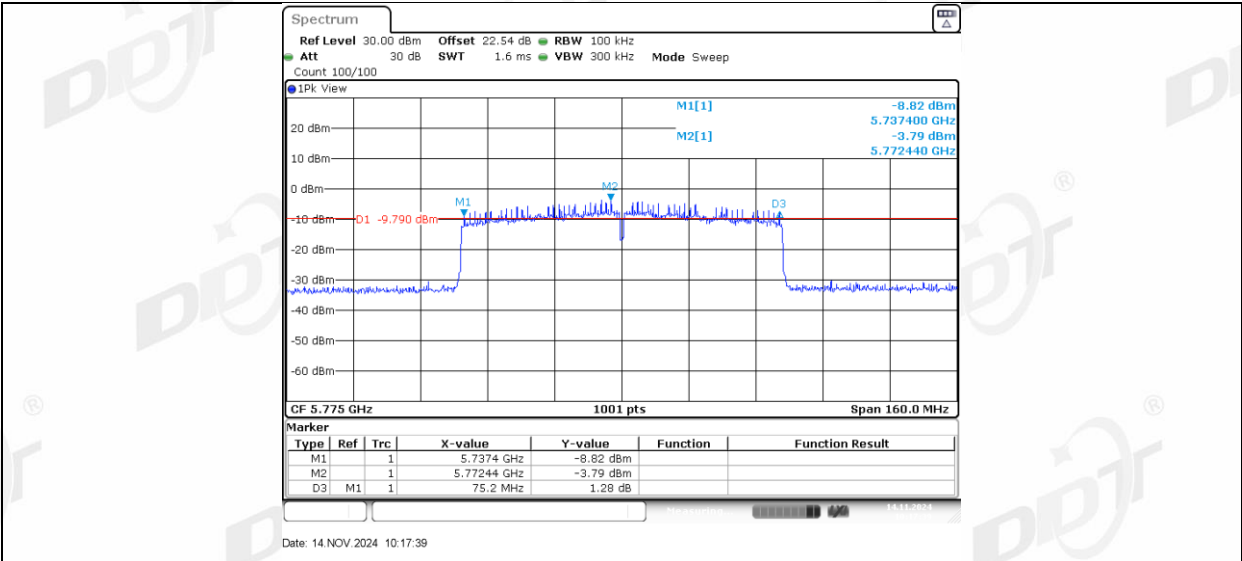


11AX20MIMO_Ant1_5745

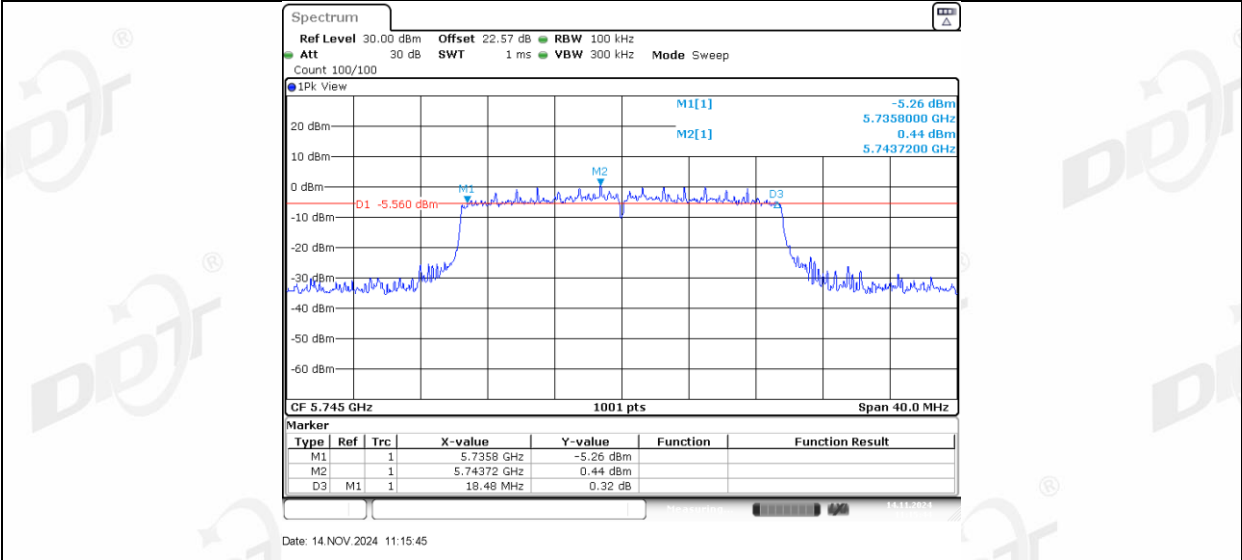


11AX20MIMO_Ant2_5745

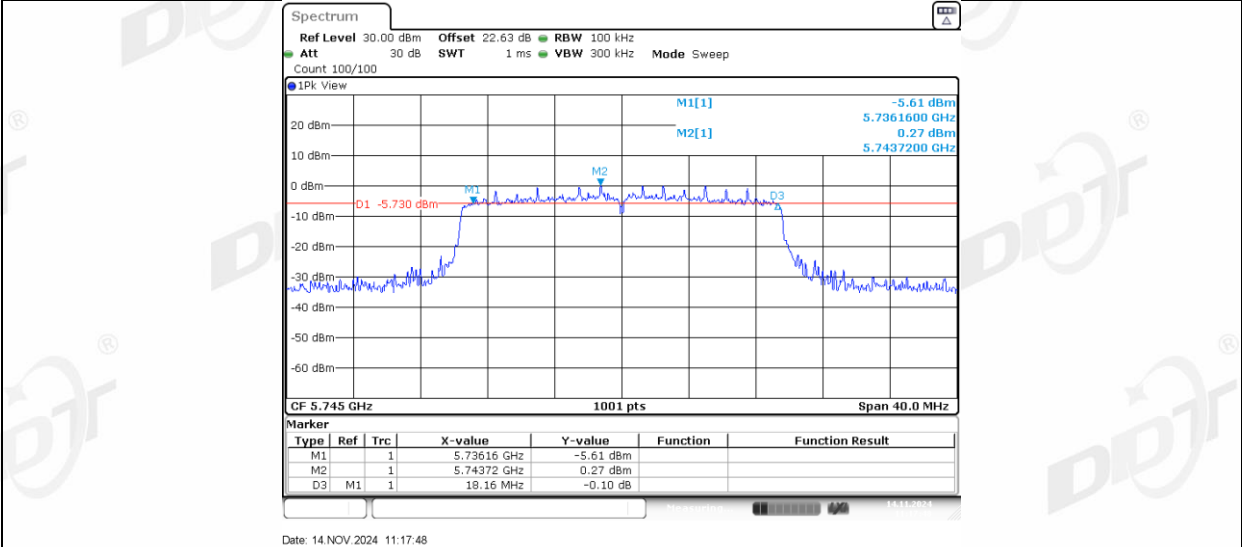


11AX20MIMO_Ant1_5785

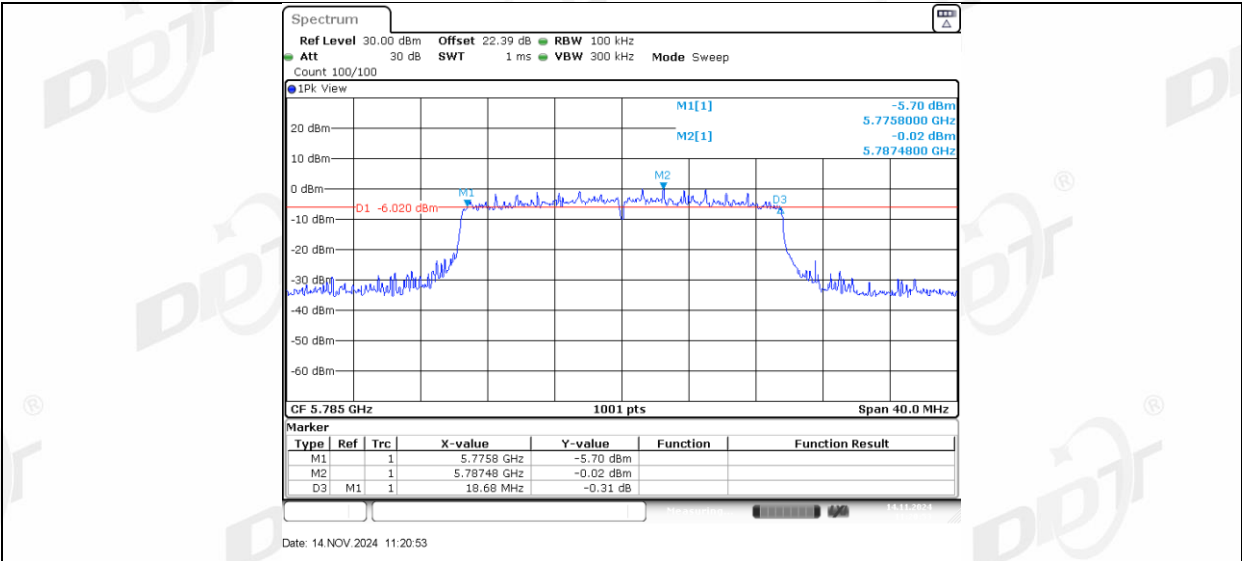


11AX20MIMO_Ant2_5785

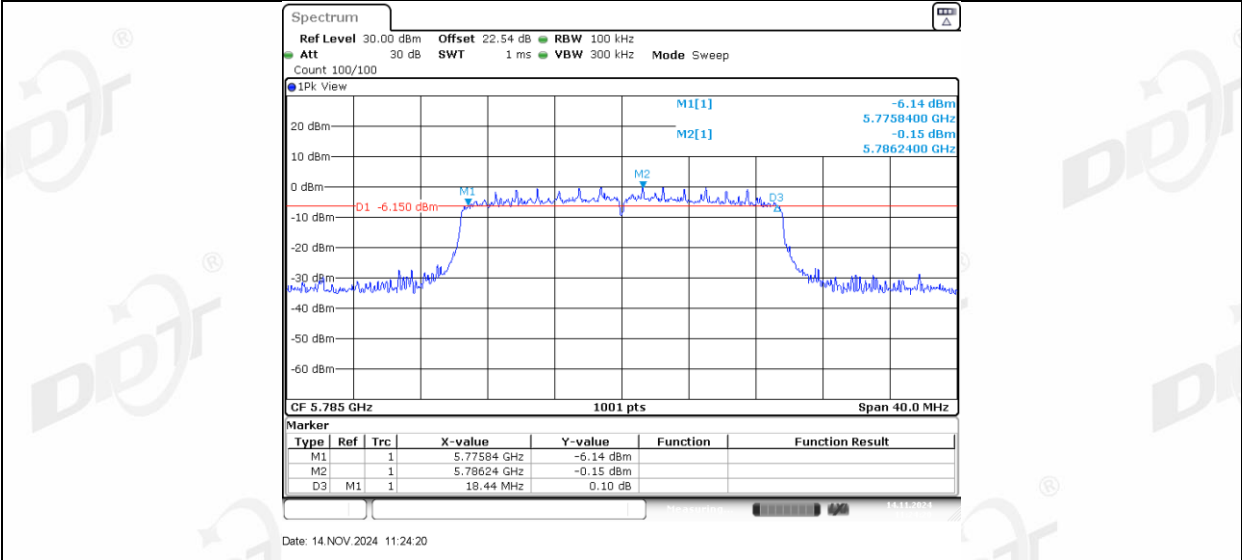


11AX20MIMO_Ant1_5825

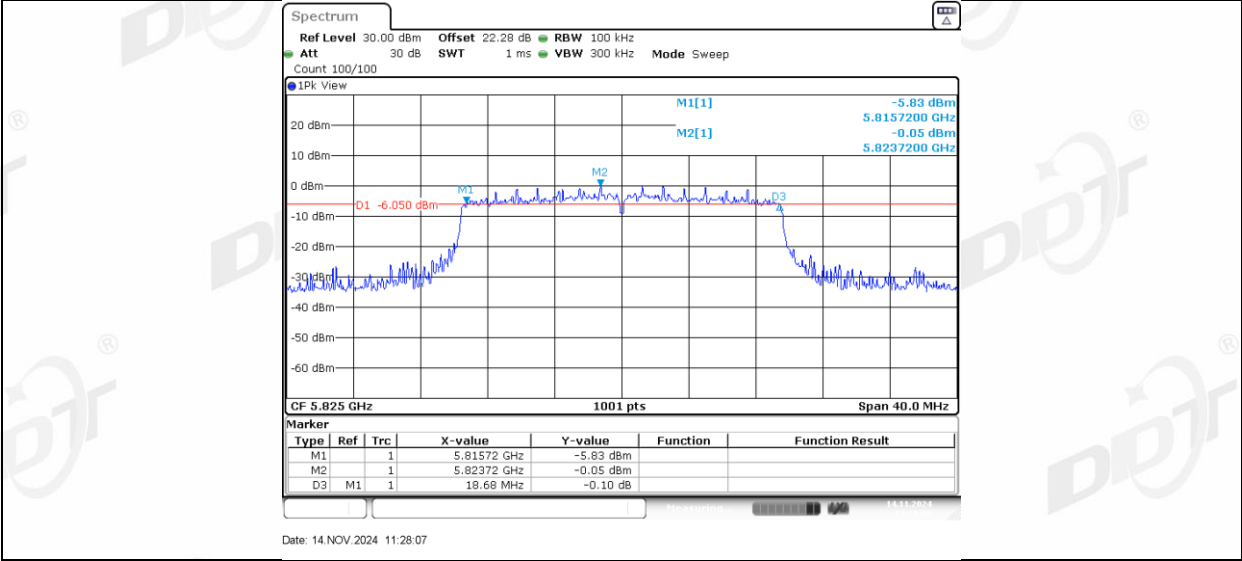


11AX20MIMO_Ant2_5825

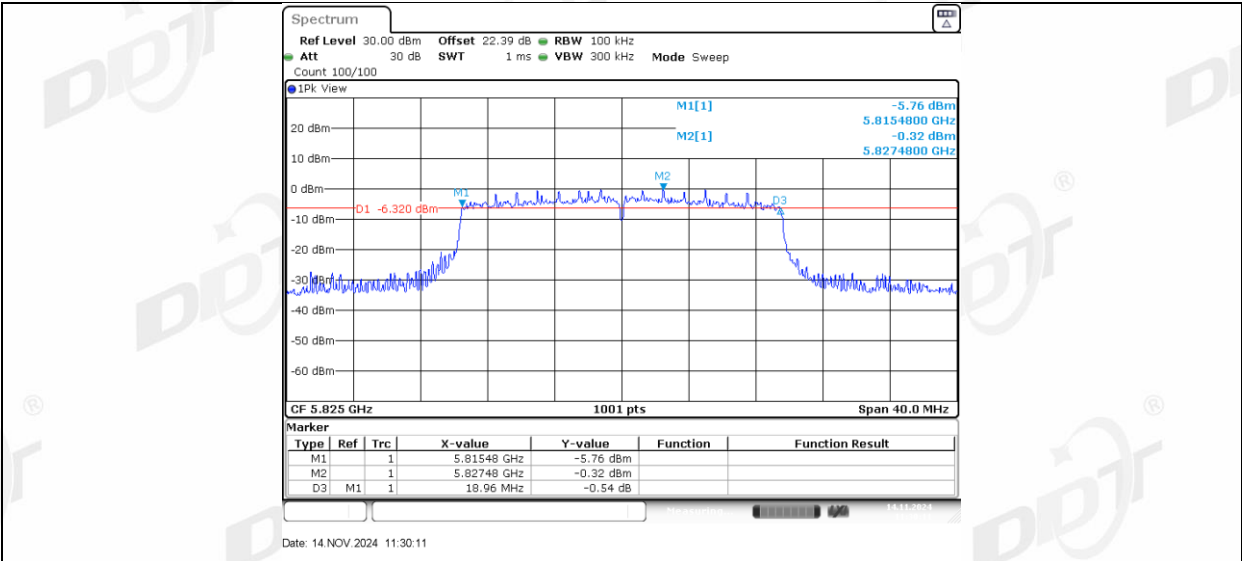

11AX40MIMO_Ant1_5755

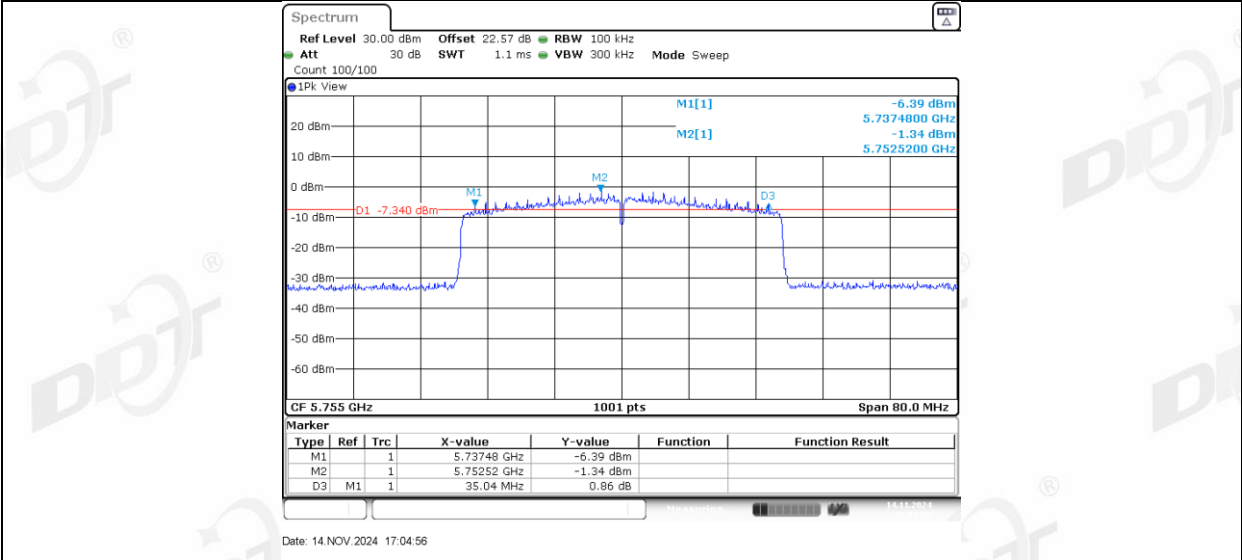


11AX40MIMO_Ant2_5755

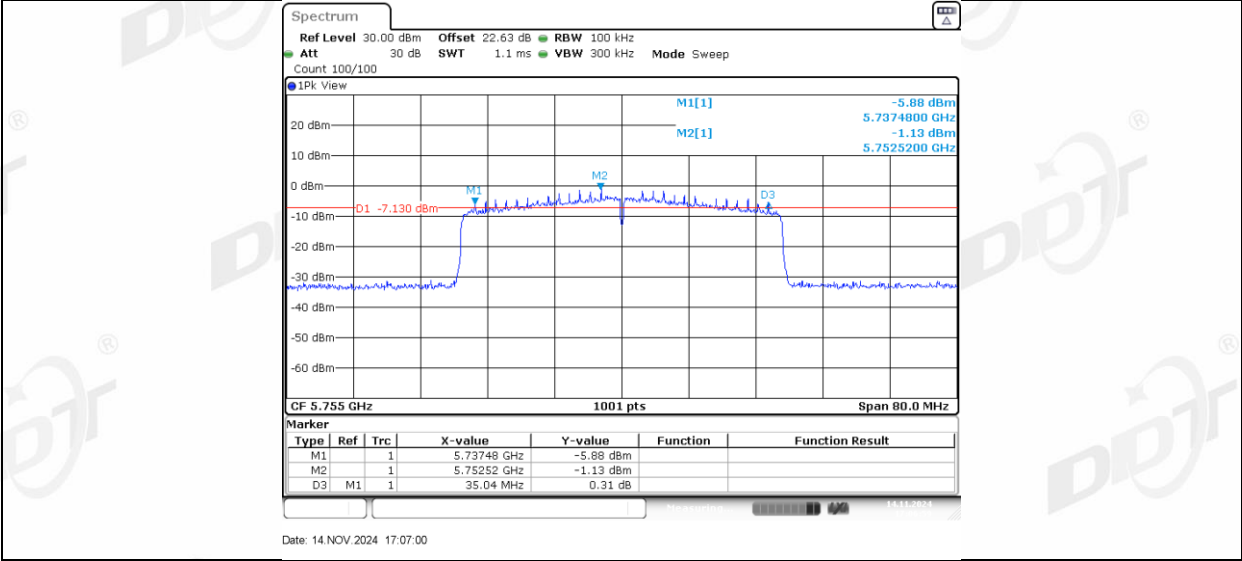


11AX40MIMO_Ant1_5795



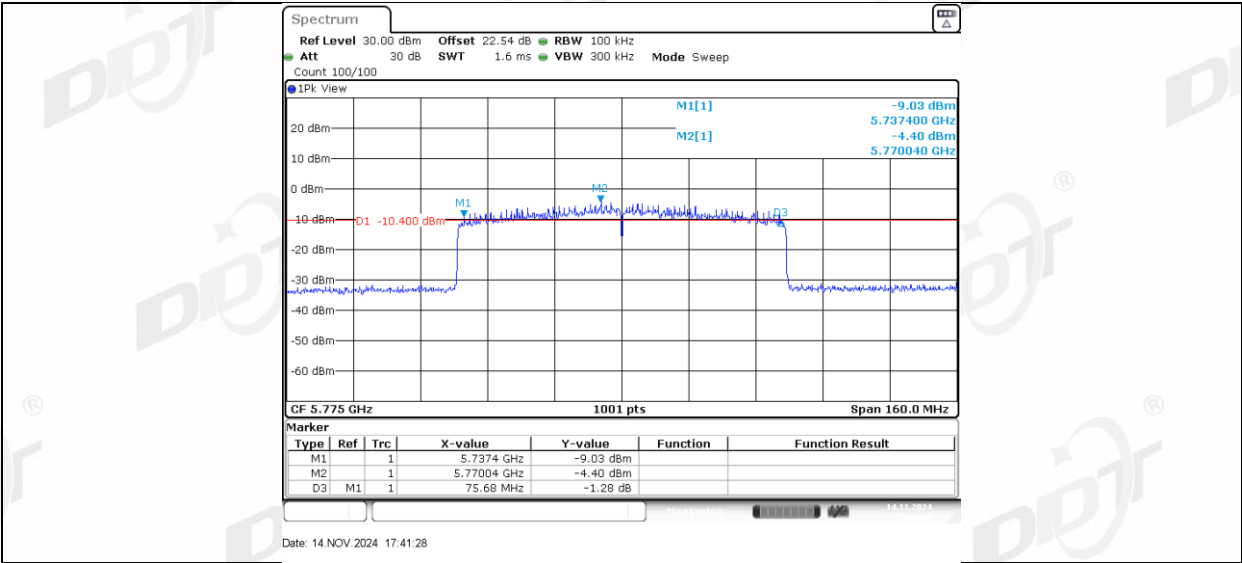

6. 99% Bandwidth

6.1. Block diagram of test setup

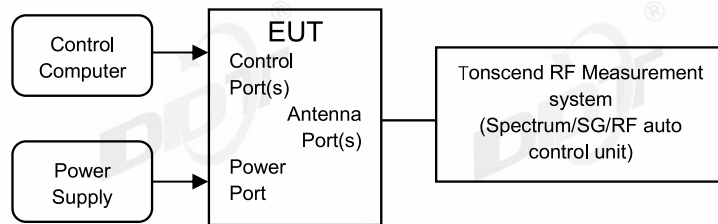

6.2. Limits

Just for Report.

6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Trace	Max hold

Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

6.4. Test result

Test Engineer:	Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3-26.5℃,43.0-55.1%RH	Test Date:	2024.11.12-2024.12.09
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24111411-004


Test Mode	Antenna	Frequency [MHz]	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.221	5170.3297	5189.5504	---	---
	Ant2	5180	19.181	5170.3696	5189.5504	---	---
	Ant1	5200	19.261	5190.2498	5209.5105	---	---
	Ant2	5200	19.221	5190.2897	5209.5105	---	---
	Ant1	5240	17.223	5231.3287	5248.5514	---	---
	Ant2	5240	17.223	5231.3287	5248.5514	---	---
	Ant1	5260	19.301	5250.2897	5269.5904	---	---
	Ant2	5260	19.301	5250.3297	5269.6304	---	---
	Ant1	5280	19.221	5270.3297	5289.5504	---	---
	Ant2	5280	19.181	5270.4096	5289.5904	---	---
	Ant1	5320	19.301	5310.2897	5329.5904	---	---
	Ant2	5320	19.261	5310.3297	5329.5904	---	---
	Ant1	5500	19.301	5490.2897	5509.5904	---	---
	Ant2	5500	19.341	5490.2498	5509.5904	---	---
	Ant1	5580	19.221	5570.2897	5589.5105	---	---
	Ant2	5580	19.261	5570.2498	5589.5105	---	---
	Ant1	5700	19.261	5690.2897	5709.5504	---	---
	Ant2	5700	19.221	5690.3696	5709.5904	---	---
	Ant1	5720	19.301	5710.2098	5729.5105	---	---
	Ant2	5720	19.181	5710.2897	5729.4705	---	---
	Ant1	5720 UNII-2C	14.79	5710.2098	5725	---	---
	Ant2	5720 UNII-2C	14.71	5710.2897	5725	---	---
	Ant1	5720 UNII-3	4.511	5725	5729.5105	---	---
	Ant2	5720 UNII-3	4.471	5725	5729.4705	---	---
	Ant1	5745	19.301	5735.3297	5754.6304	---	---
	Ant2	5745	19.221	5735.3297	5754.5504	---	---
	Ant1	5785	19.221	5775.3297	5794.5504	---	---
	Ant2	5785	19.261	5775.3297	5794.5904	---	---
	Ant1	5825	19.301	5815.2498	5834.5504	---	---
	Ant2	5825	19.301	5815.2498	5834.5504	---	---
11N20MIM O	Ant1	5180	20.06	5169.9700	5190.0300	---	---
	Ant2	5180	18.581	5170.5694	5189.1508	---	---
	Ant1	5200	20.14	5189.8901	5210.0300	---	---
	Ant2	5200	18.581	5190.6094	5209.1908	---	---
	Ant1	5240	18.022	5230.9690	5248.9910	---	---
	Ant2	5240	17.742	5231.0889	5248.8312	---	---
	Ant1	5260	20.18	5249.9700	5270.1499	---	---
	Ant2	5260	18.621	5250.6094	5269.2308	---	---
	Ant1	5280	20.1	5270.0100	5290.1099	---	---
	Ant2	5280	18.581	5270.6494	5289.2308	---	---
	Ant1	5320	20.14	5309.9700	5330.1099	---	---
	Ant2	5320	18.581	5310.6094	5329.1908	---	---
	Ant1	5500	20.18	5489.9301	5510.1099	---	---
	Ant2	5500	18.621	5490.4895	5509.1109	---	---
	Ant1	5580	20.18	5569.8901	5590.0699	---	---
	Ant2	5580	18.581	5570.5694	5589.1508	---	---
	Ant1	5700	20.1	5689.9700	5710.0699	---	---
	Ant2	5700	18.581	5690.6094	5709.1908	---	---
	Ant1	5720	20.14	5709.9301	5730.0699	---	---
	Ant2	5720	18.581	5710.5694	5729.1508	---	---
	Ant1	5720 UNII-2C	15.07	5709.9301	5725	---	---
	Ant2	5720 UNII-2C	14.431	5710.5694	5725	---	---
	Ant1	5720 UNII-3	5.07	5725	5730.0699	---	---
	Ant2	5720 UNII-3	4.151	5725	5729.1508	---	---
	Ant1	5745	20.14	5734.9700	5755.1099	---	---


	Ant2	5745	18.541	5735.6094	5754.1508	---	---
	Ant1	5785	20.14	5774.9700	5795.1099	---	---
	Ant2	5785	18.581	5775.6094	5794.1908	---	---
	Ant1	5825	20.22	5814.9301	5835.1499	---	---
	Ant2	5825	18.661	5815.5295	5834.1908	---	---
11N40MIM O	Ant2	5190	35.964	5172.0180	5207.9820	---	---
	Ant1	5230	35.964	5212.0180	5247.9820	---	---
	Ant2	5230	35.884	5212.0180	5247.9021	---	---
	Ant1	5270	35.884	5252.0979	5287.9820	---	---
	Ant2	5270	36.044	5252.0180	5288.0619	---	---
	Ant1	5310	35.964	5292.0180	5327.9820	---	---
	Ant2	5310	35.964	5292.0180	5327.9820	---	---
	Ant1	5510	35.964	5492.0180	5527.9820	---	---
	Ant2	5510	36.124	5491.9381	5528.0619	---	---
	Ant1	5550	35.964	5532.0180	5567.9820	---	---
	Ant2	5550	36.044	5531.9381	5567.9820	---	---
	Ant1	5670	35.964	5652.0180	5687.9820	---	---
	Ant2	5670	35.964	5652.0180	5687.9820	---	---
	Ant1	5710	35.964	5692.0180	5727.9820	---	---
	Ant2	5710	36.044	5691.9381	5727.9820	---	---
	Ant1	5710 UNII-2C	32.982	5692.0180	5725	---	---
	Ant2	5710 UNII-2C	33.062	5691.9381	5725	---	---
	Ant1	5710 UNII-3	2.982	5725	5727.9820	---	---
	Ant2	5710 UNII-3	2.982	5725	5727.9820	---	---
	Ant1	5755	35.964	5737.0180	5772.9820	---	---
	Ant2	5755	36.044	5736.9381	5772.9820	---	---
	Ant1	5795	35.964	5777.0180	5812.9820	---	---
	Ant2	5795	35.964	5777.0180	5812.9820	---	---
11AC20MI MO	Ant1	5180	19.74	5170.0899	5189.8302	---	---
	Ant2	5180	18.382	5170.8492	5189.2308	---	---
	Ant1	5200	19.86	5190.0500	5209.9101	---	---
	Ant2	5200	18.342	5190.8891	5209.2308	---	---
	Ant1	5240	17.982	5230.9690	5248.9510	---	---
	Ant2	5240	17.582	5231.1688	5248.7512	---	---
	Ant1	5260	19.82	5250.0899	5269.9101	---	---
	Ant2	5260	18.262	5250.9291	5269.1908	---	---
	Ant1	5280	19.82	5270.0899	5289.9101	---	---
	Ant2	5280	18.222	5270.9690	5289.1908	---	---
	Ant1	5320	19.9	5310.0899	5329.9900	---	---
	Ant2	5320	18.342	5310.8891	5329.2308	---	---
	Ant1	5500	19.94	5490.0500	5509.9900	---	---
	Ant2	5500	18.382	5490.8092	5509.1908	---	---
	Ant1	5580	19.82	5570.0500	5589.8701	---	---
	Ant2	5580	18.222	5570.9291	5589.1508	---	---
	Ant1	5700	19.86	5690.0899	5709.9500	---	---
	Ant2	5700	18.302	5690.8891	5709.1908	---	---
	Ant1	5720	19.82	5710.0500	5729.8701	---	---
	Ant2	5720	18.182	5710.9291	5729.1109	---	---
	Ant1	5720 UNII-2C	14.95	5710.0500	5725	---	---
	Ant2	5720 UNII-2C	14.071	5710.9291	5725	---	---
	Ant1	5720 UNII-3	4.87	5725	5729.8701	---	---
	Ant2	5720 UNII-3	4.111	5725	5729.1109	---	---
	Ant1	5745	19.78	5735.1299	5754.9101	---	---
	Ant2	5745	18.222	5735.9291	5754.1508	---	---
	Ant1	5785	19.82	5775.0899	5794.9101	---	---
	Ant2	5785	18.262	5775.9291	5794.1908	---	---
	Ant1	5825	19.94	5815.0100	5834.9500	---	---
	Ant2	5825	18.222	5815.8891	5834.1109	---	---
11AC40MI MO	Ant1	5190	35.804	5172.0979	5207.9021	---	---
	Ant2	5190	36.124	5171.9381	5208.0619	---	---
	Ant1	5230	35.804	5212.0979	5247.9021	---	---
	Ant2	5230	36.124	5211.9381	5248.0619	---	---
	Ant1	5270	35.884	5252.0979	5287.9820	---	---
	Ant2	5270	36.124	5252.0180	5288.1419	---	---

	Ant1	5310	35.804	5292.0979	5327.9021	---	---
	Ant2	5310	36.124	5291.9381	5328.0619	---	---
	Ant1	5510	35.884	5492.0979	5527.9820	---	---
	Ant2	5510	36.124	5491.9381	5528.0619	---	---
	Ant1	5550	35.964	5532.0180	5567.9820	---	---
	Ant2	5550	36.124	5531.9381	5568.0619	---	---
	Ant1	5670	35.884	5652.0180	5687.9021	---	---
	Ant2	5670	36.124	5652.0180	5688.1419	---	---
	Ant1	5710	35.884	5692.0180	5727.9021	---	---
	Ant2	5710	36.124	5691.9381	5728.0619	---	---
	Ant1	5710 UNII-2C	32.982	5692.0180	5725	---	---
	Ant2	5710 UNII-2C	33.062	5691.9381	5725	---	---
	Ant1	5710 UNII-3	2.902	5725	5727.9021	---	---
	Ant2	5710 UNII-3	3.062	5725	5728.0619	---	---
	Ant1	5755	35.804	5737.0979	5772.9021	---	---
	Ant2	5755	36.044	5736.9381	5772.9820	---	---
	Ant1	5795	35.804	5777.0979	5812.9021	---	---
	Ant2	5795	36.044	5777.0180	5813.0619	---	---
11AC80MI MO	Ant1	5210	75.285	5172.2777	5247.5624	---	---
	Ant2	5210	74.965	5172.5974	5247.5624	---	---
	Ant1	5290	75.285	5252.4376	5327.7223	---	---
	Ant2	5290	74.805	5252.7572	5327.5624	---	---
	Ant1	5530	75.125	5492.4376	5567.5624	---	---
	Ant2	5530	75.125	5492.4376	5567.5624	---	---
	Ant1	5610	75.445	5572.2777	5647.7223	---	---
	Ant2	5610	75.125	5572.4376	5647.5624	---	---
	Ant1	5690	75.125	5652.4376	5727.5624	---	---
	Ant2	5690	74.805	5652.5974	5727.4026	---	---
	Ant1	5690 UNII-2C	72.562	5652.4376	5725	---	---
	Ant2	5690 UNII-2C	72.403	5652.5974	5725	---	---
	Ant1	5690 UNII-3	2.562	5725	5727.5624	---	---
	Ant2	5690 UNII-3	2.403	5725	5727.4026	---	---
11AX20MI MO	Ant1	5775	75.125	5737.5974	5812.7223	---	---
	Ant2	5775	75.125	5737.4376	5812.5624	---	---
	Ant1	5180	19.181	5170.4096	5189.5904	---	---
	Ant2	5180	19.221	5170.4096	5189.6304	---	---
	Ant1	5200	19.221	5190.3696	5209.5904	---	---
	Ant2	5200	19.261	5190.3696	5209.6304	---	---
	Ant1	5240	18.901	5230.5295	5249.4306	---	---
	Ant2	5240	18.901	5230.5295	5249.4306	---	---
	Ant1	5260	19.261	5250.3696	5269.6304	---	---
	Ant2	5260	19.261	5250.4096	5269.6703	---	---
	Ant1	5280	19.261	5270.3696	5289.6304	---	---
	Ant2	5280	19.261	5270.4096	5289.6703	---	---
	Ant1	5320	19.261	5310.3696	5329.6304	---	---
	Ant2	5320	19.261	5310.4096	5329.6703	---	---
	Ant1	5500	19.261	5490.3696	5509.6304	---	---
	Ant2	5500	19.301	5490.3297	5509.6304	---	---
	Ant1	5580	19.221	5570.3696	5589.5904	---	---
	Ant2	5580	19.261	5570.3696	5589.6304	---	---
	Ant1	5700	19.261	5690.3696	5709.6304	---	---
	Ant2	5700	19.261	5690.3696	5709.6304	---	---
	Ant1	5720	19.261	5710.3297	5729.5904	---	---
	Ant2	5720	19.261	5710.3696	5729.6304	---	---
	Ant1	5720 UNII-2C	14.67	5710.3297	5725	---	---
	Ant2	5720 UNII-2C	14.63	5710.3696	5725	---	---
	Ant1	5720 UNII-3	4.59	5725	5729.5904	---	---
	Ant2	5720 UNII-3	4.63	5725	5729.6304	---	---
	Ant1	5745	19.261	5735.3696	5754.6304	---	---
	Ant2	5745	19.261	5735.3696	5754.6304	---	---
	Ant1	5785	19.261	5775.3696	5794.6304	---	---
	Ant2	5785	19.301	5775.3696	5794.6703	---	---
	Ant1	5825	19.261	5815.3696	5834.6304	---	---
	Ant2	5825	19.261	5815.3696	5834.6304	---	---


11AX40MI MO	Ant1	5190	37.562	5171.2188	5208.7812	---	---
	Ant2	5190	37.562	5171.2188	5208.7812	---	---
	Ant1	5230	37.642	5211.1389	5248.7812	---	---
	Ant2	5230	37.642	5211.1389	5248.7812	---	---
	Ant1	5270	37.642	5251.2188	5288.8611	---	---
	Ant2	5270	37.722	5251.2188	5288.9411	---	---
	Ant1	5310	37.642	5291.2188	5328.8611	---	---
	Ant2	5310	37.642	5291.1389	5328.7812	---	---
	Ant1	5510	37.722	5491.1389	5528.8611	---	---
	Ant2	5510	37.722	5491.1389	5528.8611	---	---
	Ant1	5550	37.722	5531.1389	5568.8611	---	---
	Ant2	5550	37.562	5531.2188	5568.7812	---	---
	Ant1	5670	37.562	5651.2188	5688.7812	---	---
	Ant2	5670	37.642	5651.2188	5688.8611	---	---
	Ant1	5710	37.642	5691.1389	5728.7812	---	---
	Ant2	5710	37.562	5691.2188	5728.7812	---	---
	Ant1	5710 UNII-2C	33.861	5691.1389	5725	---	---
	Ant2	5710 UNII-2C	33.781	5691.2188	5725	---	---
	Ant1	5710 UNII-3	3.781	5725	5728.7812	---	---
	Ant2	5710 UNII-3	3.781	5725	5728.7812	---	---
	Ant1	5755	37.642	5736.1389	5773.7812	---	---
	Ant2	5755	37.642	5736.1389	5773.7812	---	---
	Ant1	5795	37.562	5776.2188	5813.7812	---	---
	Ant2	5795	37.642	5776.2188	5813.8611	---	---
11AX80MI MO	Ant1	5210	77.043	5171.4785	5248.5215	---	---
	Ant2	5210	77.203	5171.3187	5248.5215	---	---
	Ant1	5290	77.203	5251.4785	5328.6813	---	---
	Ant2	5290	77.043	5251.6384	5328.6813	---	---
	Ant1	5530	77.043	5491.4785	5568.5215	---	---
	Ant2	5530	77.043	5491.4785	5568.5215	---	---
	Ant1	5610	77.203	5571.4785	5648.6813	---	---
	Ant2	5610	77.043	5571.4785	5648.5215	---	---
	Ant1	5690	77.043	5651.4785	5728.5215	---	---
	Ant2	5690	77.043	5651.4785	5728.5215	---	---
	Ant1	5690 UNII-2C	73.521	5651.4785	5725	---	---
	Ant2	5690 UNII-2C	73.521	5651.4785	5725	---	---
	Ant1	5690 UNII-3	3.521	5725	5728.5215	---	---
	Ant2	5690 UNII-3	3.521	5725	5728.5215	---	---
	Ant1	5775	77.203	5736.3187	5813.5215	---	---
	Ant2	5775	77.203	5736.4785	5813.6813	---	---

6.5. Test graphs

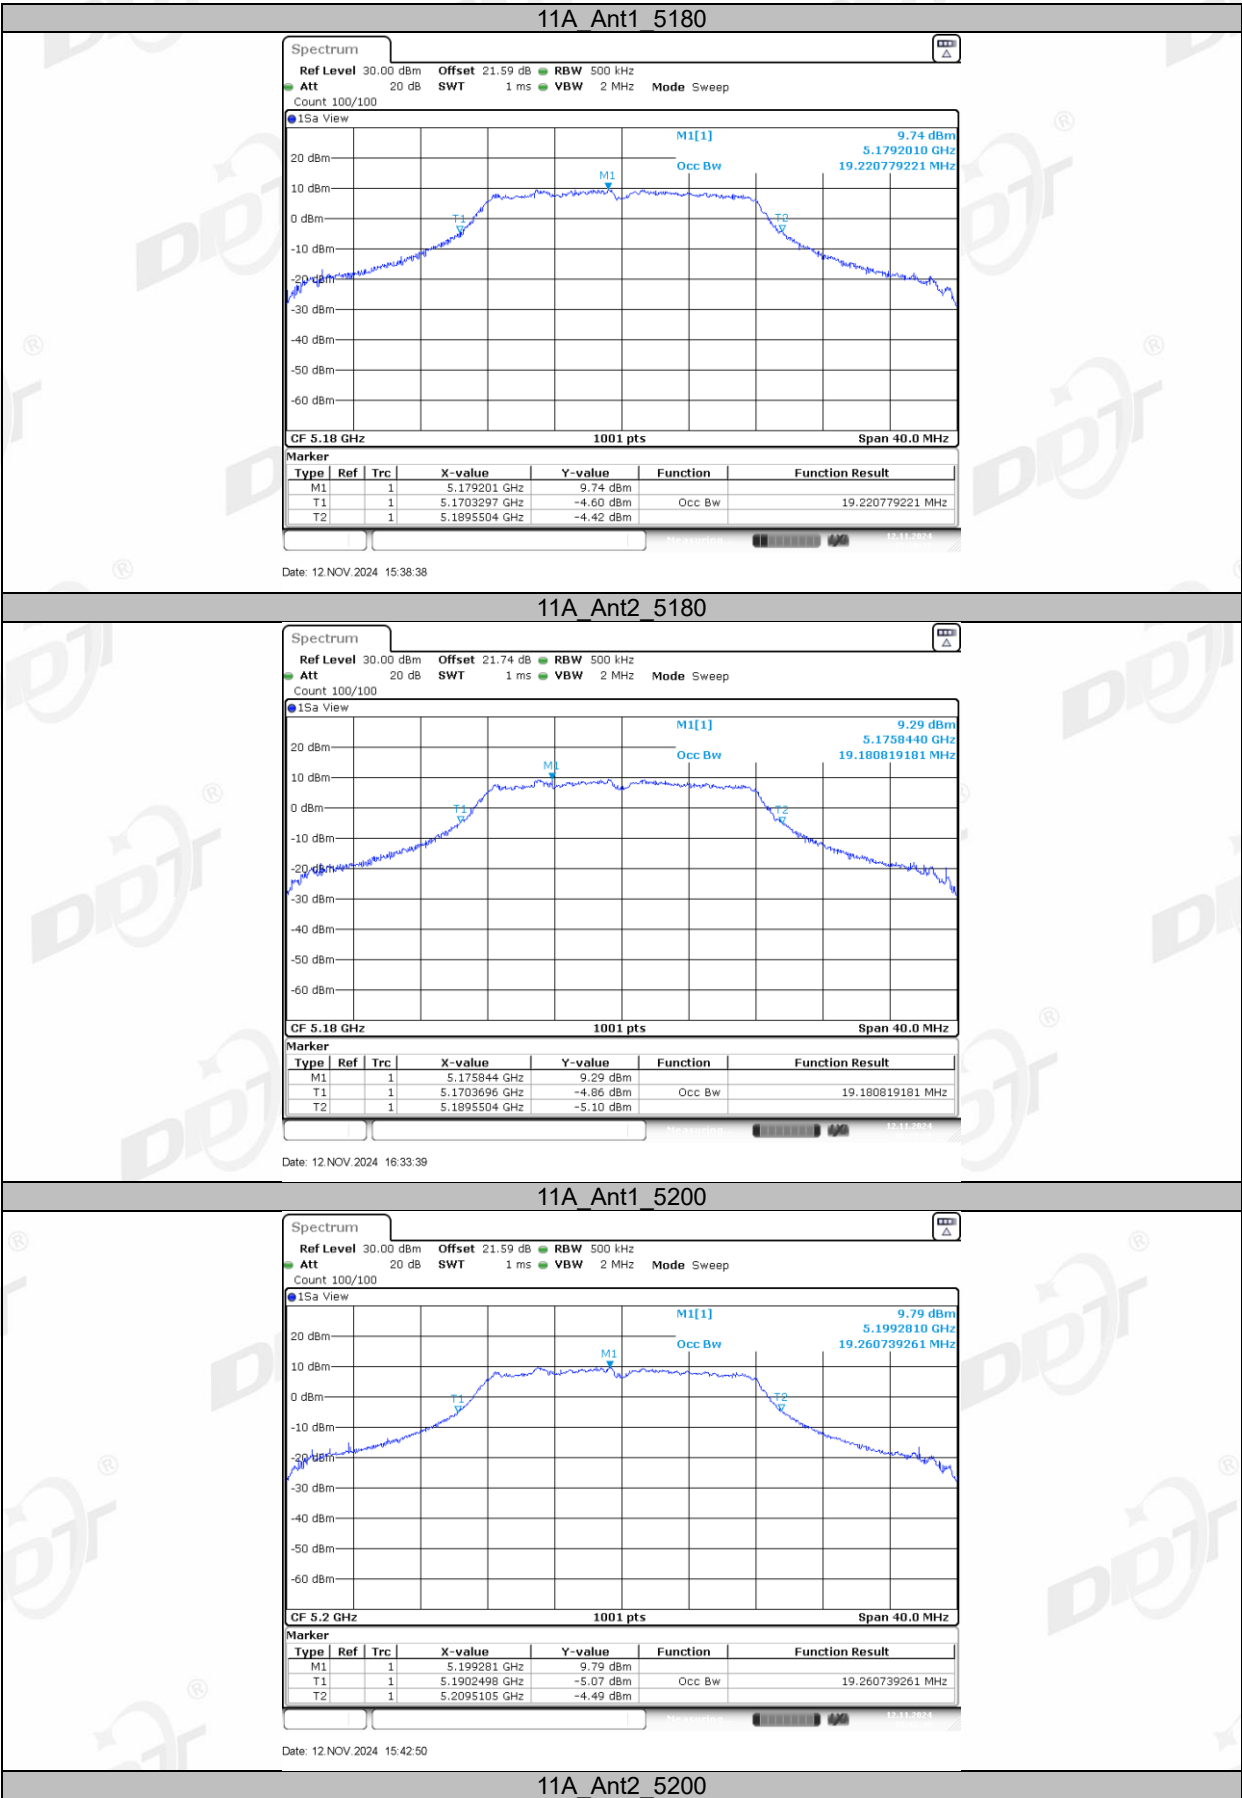


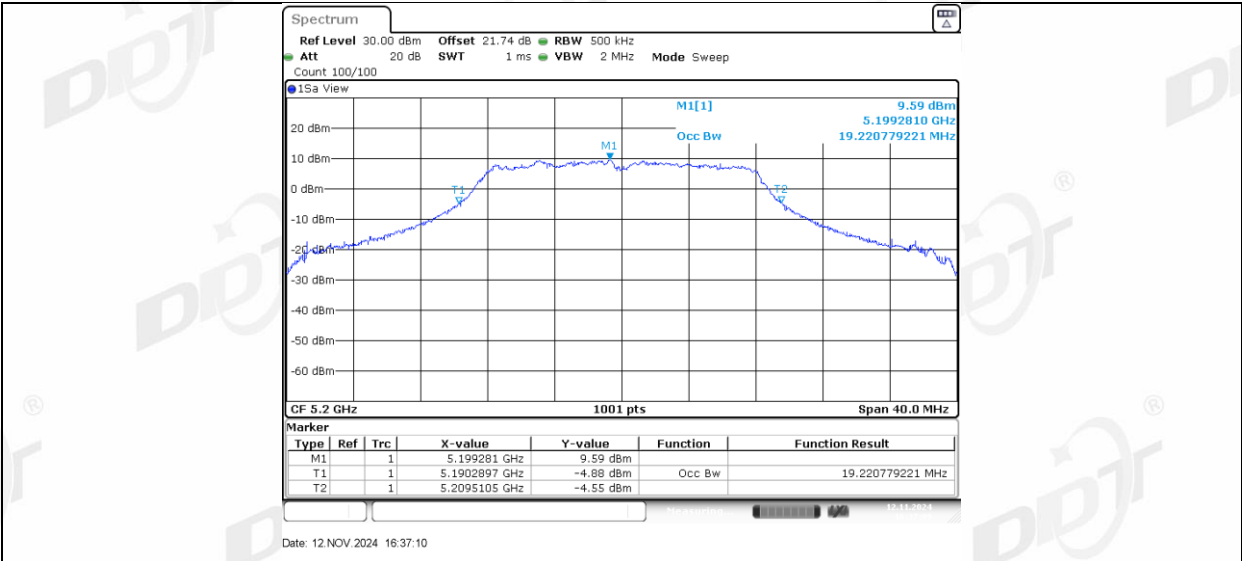


11A_Ant1_5240

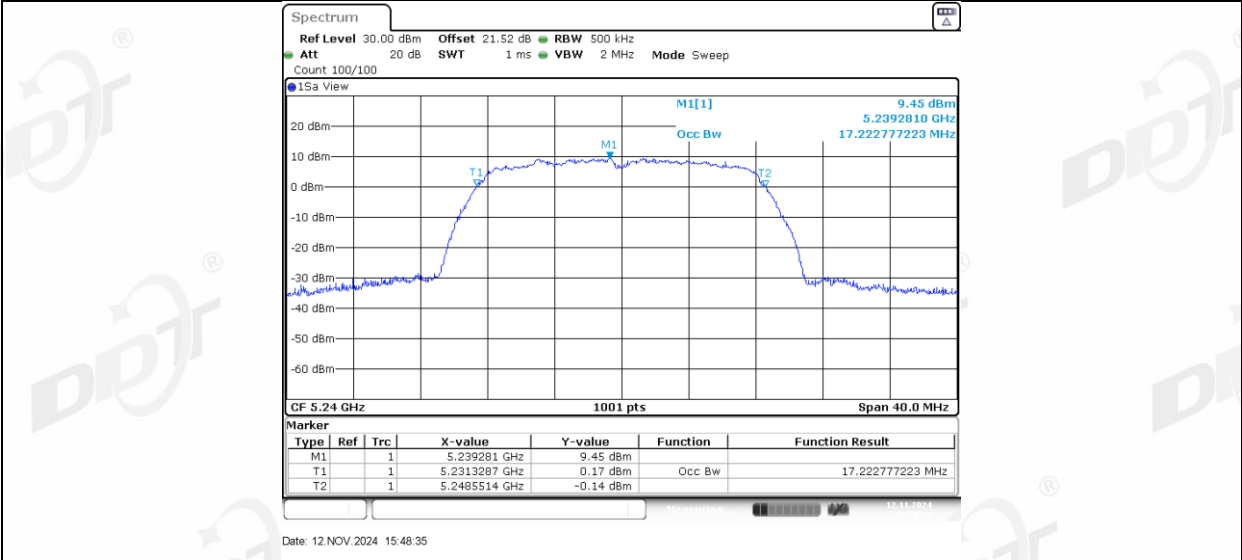


11A_Ant2_5240

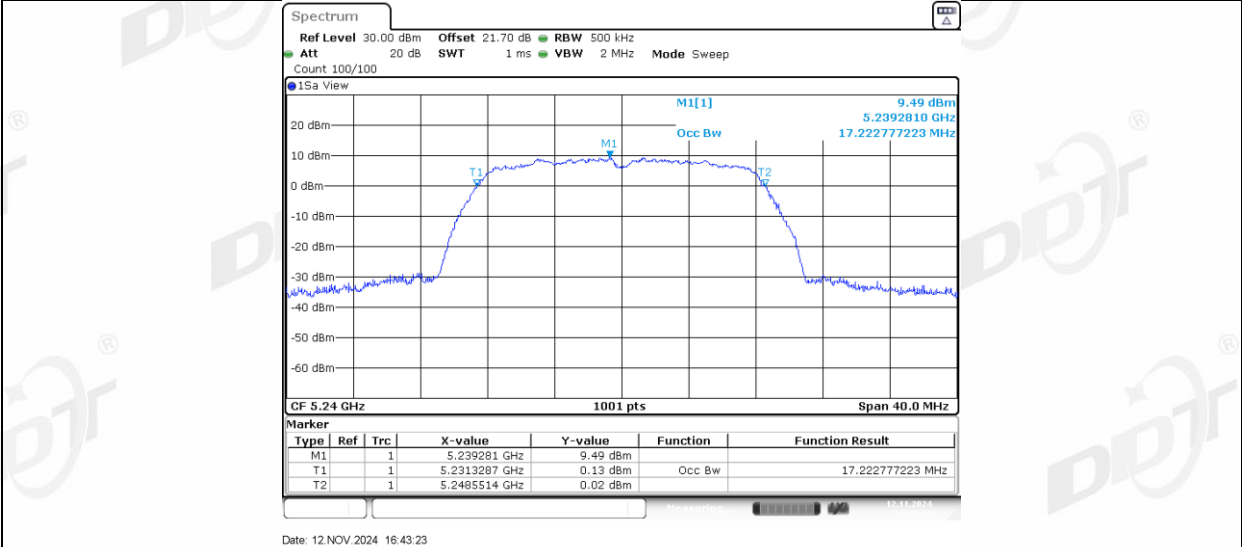


11A_Ant1_5260

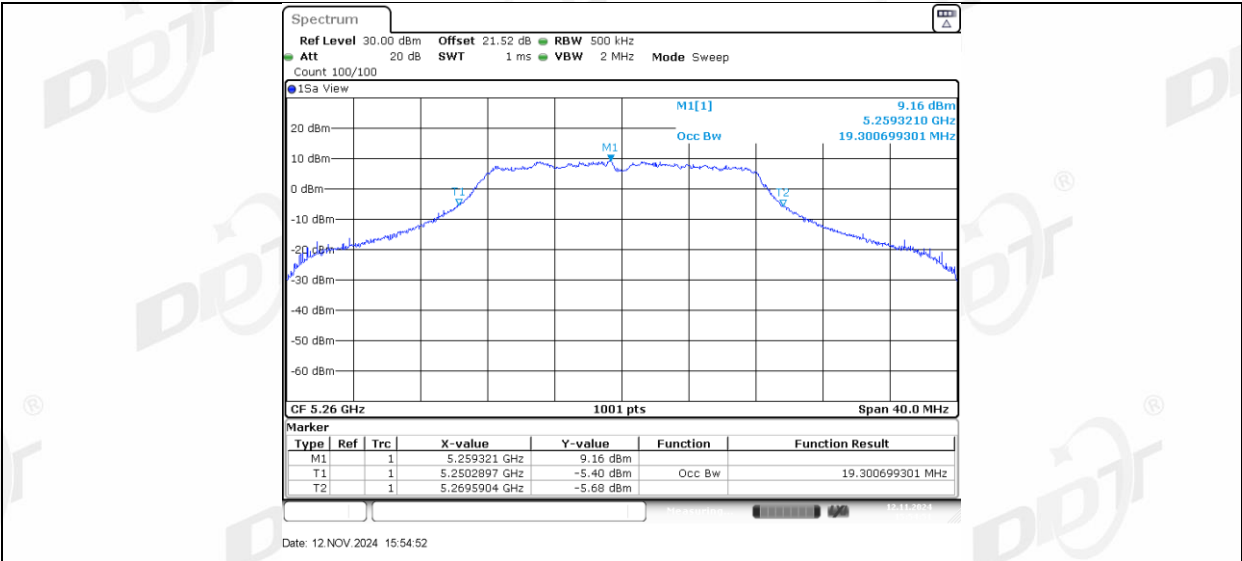

11A_Ant2_5260

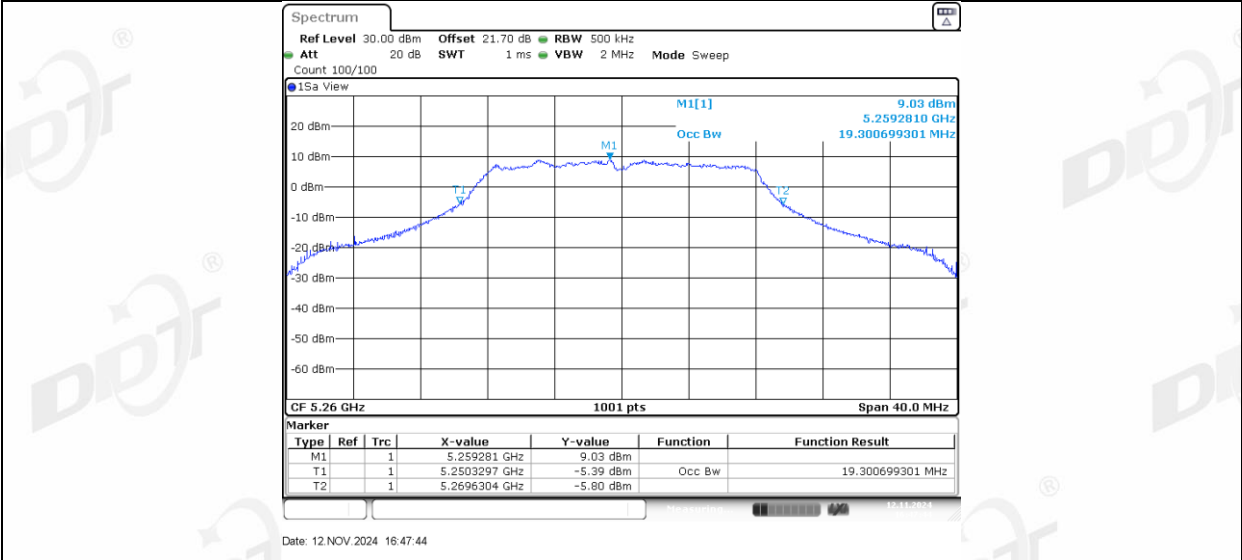

11A_Ant1_5280

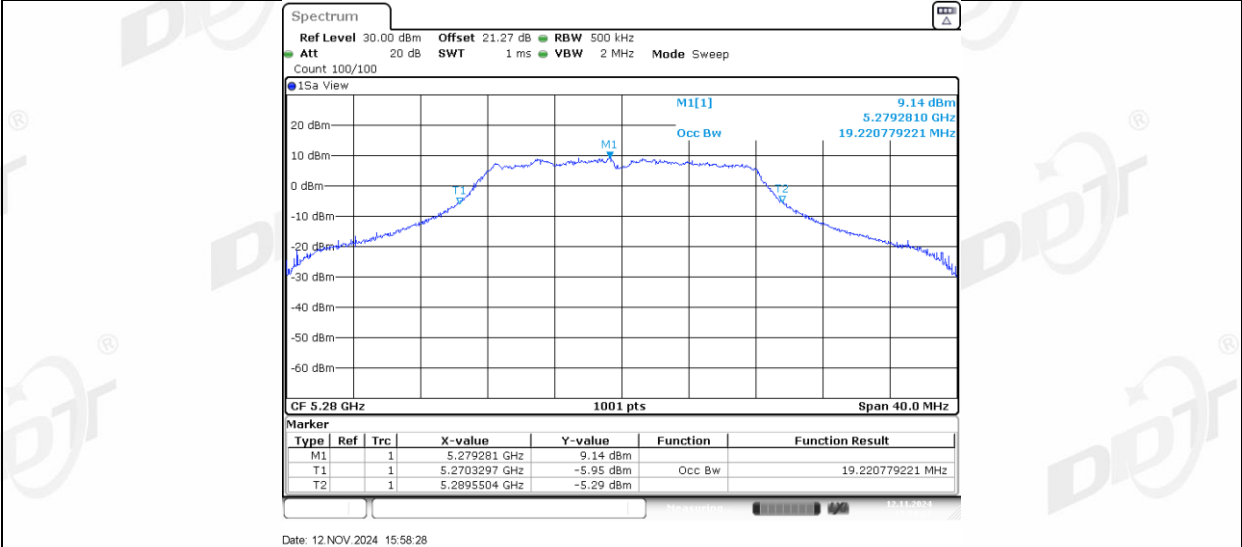

11A_Ant2_5280