





Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

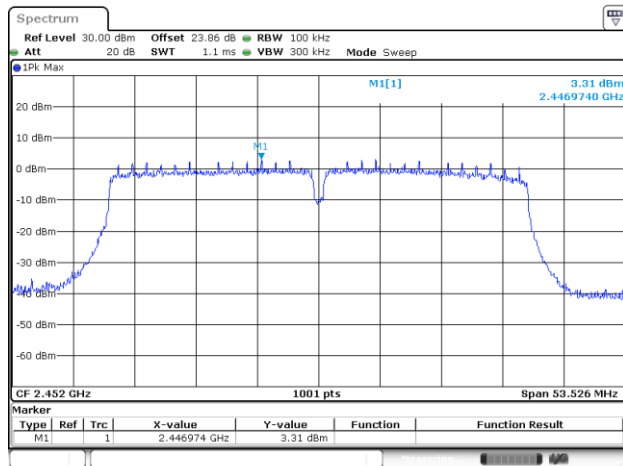


Channel 09 Plot

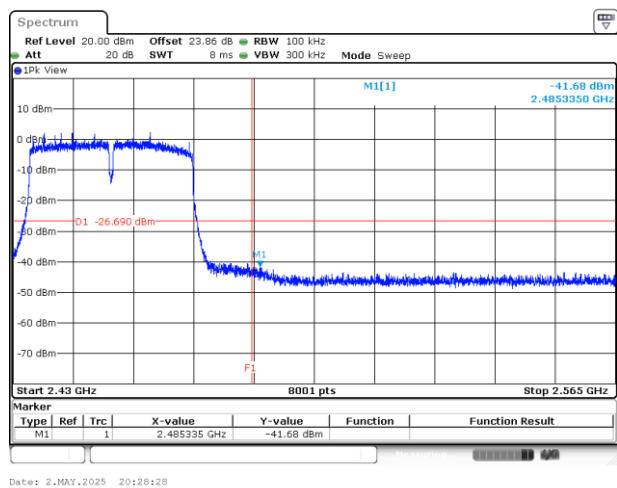

Spurious Emission 30MHz~1GHz

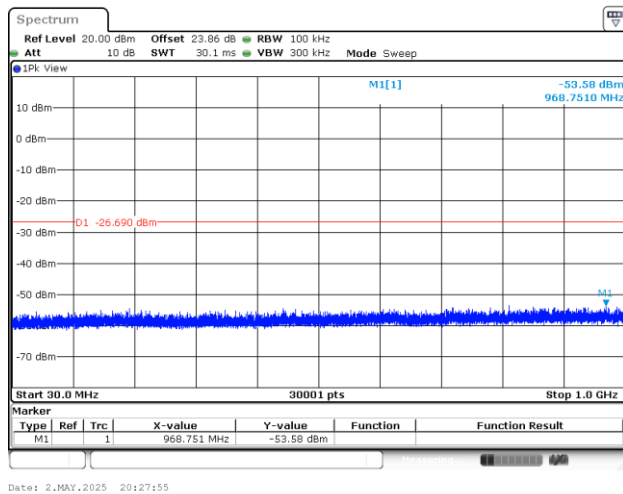

Spurious Emission 1GHz~26.5GHz

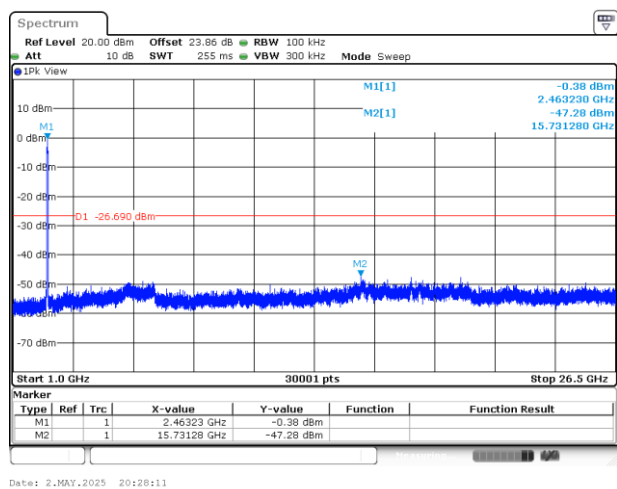




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 532004
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

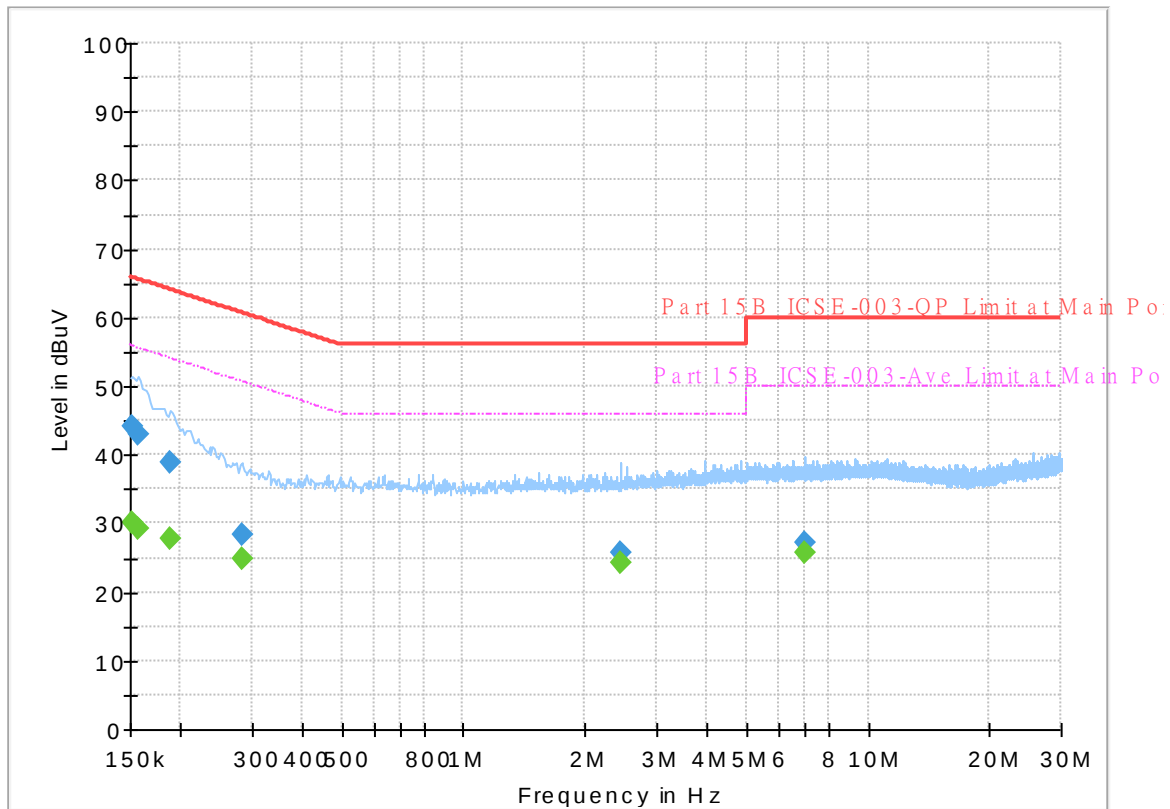


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	30.02	55.88	25.86	L1	OFF	19.8
0.152250	44.24	---	65.88	21.64	L1	OFF	19.8
0.156750	---	29.32	55.63	26.31	L1	OFF	19.8
0.156750	42.96	---	65.63	22.67	L1	OFF	19.8
0.188250	---	27.77	54.11	26.34	L1	OFF	19.8
0.188250	38.76	---	64.11	25.35	L1	OFF	19.8
0.282750	---	24.85	50.74	25.89	L1	OFF	19.8
0.282750	28.28	---	60.74	32.46	L1	OFF	19.8
2.454000	---	24.28	46.00	21.72	L1	OFF	19.9
2.454000	25.71	---	56.00	30.29	L1	OFF	19.9
6.976500	---	25.82	50.00	24.18	L1	OFF	20.1
6.976500	27.25	---	60.00	32.75	L1	OFF	20.1

EUT Information

Report NO : 532004
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

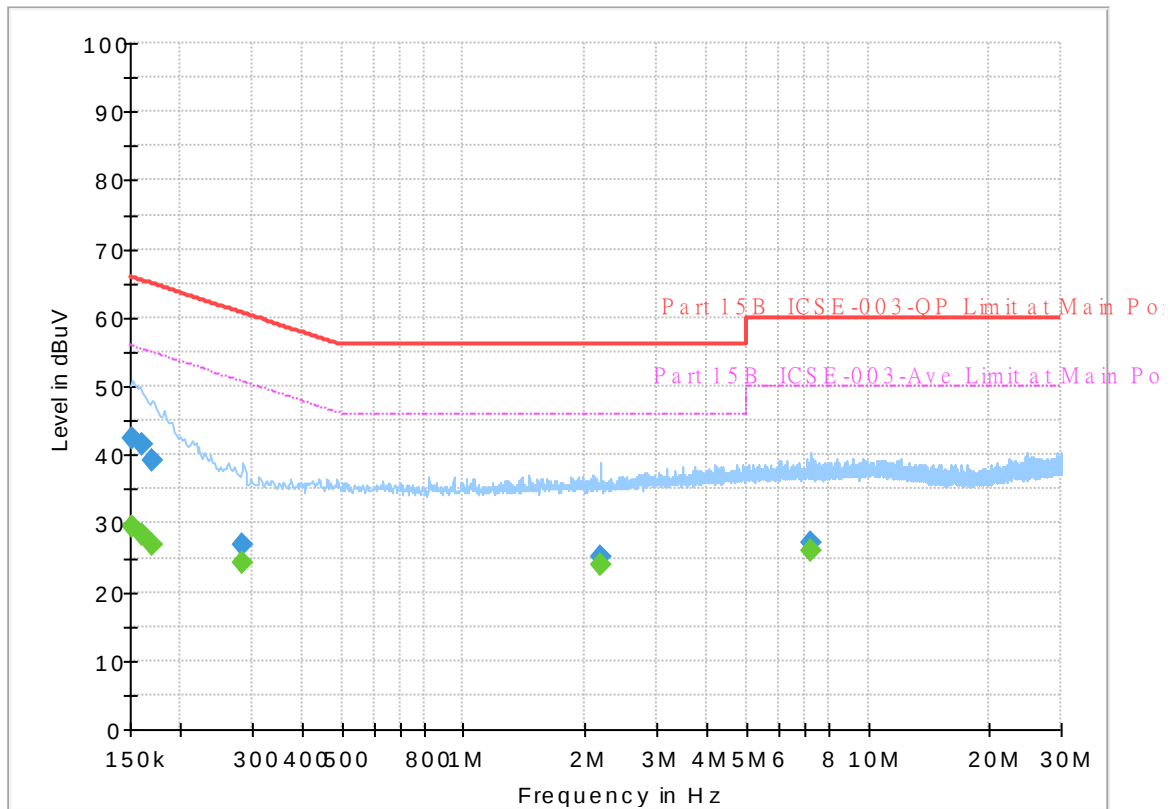

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.52	55.88	26.36	N	OFF	19.8
0.152250	42.46	---	65.88	23.42	N	OFF	19.8
0.161250	---	28.49	55.40	26.91	N	OFF	19.8
0.161250	41.57	---	65.40	23.83	N	OFF	19.8
0.170250	---	26.97	54.95	27.98	N	OFF	19.8
0.170250	39.09	---	64.95	25.86	N	OFF	19.8
0.285000	---	24.31	50.67	26.36	N	OFF	19.8
0.285000	26.80	---	60.67	33.87	N	OFF	19.8
2.181750	---	24.02	46.00	21.98	N	OFF	19.9
2.181750	25.29	---	56.00	30.71	N	OFF	19.9
7.233000	---	25.91	50.00	24.09	N	OFF	20.2
7.233000	27.20	---	60.00	32.80	N	OFF	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Fred Tseng, Ray Lung and Sky Chang	Temperature :	18~23°C
		Relative Humidity :	50~65%

Note symbol

-L	Low channel location
-R	High channel location



C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1+2	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	1+2	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	1+2	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	1+2	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	1+2	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	1+2	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	1+2	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	1+2	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	1+2	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	1+2	802.11n HT40	03	2422	MCS0	-	-
Mode 11	2400-2483.5	1+2	802.11n HT40	06	2437	MCS0	-	-



Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	2400-2483.5	1+2	802.11n HT40	09	2452	MCS0	-	-
Mode 13	2400-2483.5	1+2	802.11n HT40	09	2452	MCS0	-	LF
Mode 14	2400-2483.5	1+2	802.11n HT40	09	2452	MCS0	-	SHF



C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11b	01	2389.56	40.20	54.00	-13.80	H	Avg.	Pass	-	Band Edge
	802.11b	01	4824.00	44.10	74.00	-29.90	H	Peak	Pass	-	Harmonic
2	802.11b	06	2483.81	39.53	54.00	-14.47	H	Avg.	Pass	-	Band Edge
	802.11b	06	7311.00	38.65	54.00	-15.35	V	Avg.	Pass	-	Harmonic
3	802.11b	11	2483.51	47.14	54.00	-6.86	H	Avg.	Pass	-	Band Edge
	802.11b	11	4924.00	44.13	54.00	-9.87	V	Avg.	Pass	-	Harmonic
4	802.11g	01	2389.97	49.18	54.00	-4.82	H	Avg.	Pass	-	Band Edge
	802.11g	01	4824.00	36.42	54.00	-17.58	V	Avg.	Pass	-	Harmonic
5	802.11g	06	2483.56	39.93	54.00	-14.07	H	Avg.	Pass	-	Band Edge
	802.11g	06	7311.00	42.44	54.00	-11.56	V	Avg.	Pass	-	Harmonic
6	802.11g	11	2483.51	50.48	54.00	-3.52	H	Avg.	Pass	-	Band Edge







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11g	11	4924.00	42.27	54.00	-11.73	V	Avg.	Pass	-	Harmonic
7	802.11n HT20	01	2389.97	48.23	54.00	-5.77	H	Avg.	Pass	-	Band Edge
	802.11n HT20	01	4824.00	45.17	74.00	-28.83	V	Peak	Pass	-	Harmonic
8	802.11n HT20	06	2483.68	39.79	54.00	-14.21	H	Avg.	Pass	-	Band Edge
	802.11n HT20	06	7311.00	38.57	54.00	-15.43	V	Avg.	Pass	-	Harmonic
9	802.11n HT20	11	2483.51	49.57	54.00	-4.43	H	Avg.	Pass	-	Band Edge
	802.11n HT20	11	4924.00	40.78	54.00	-13.22	V	Avg.	Pass	-	Harmonic
10	802.11n HT40	03	2389.97	51.21	54.00	-2.79	H	Avg.	Pass	-	Band Edge
	802.11n HT40	03	4844.00	44.46	74.00	-29.54	V	Peak	Pass	-	Harmonic
11	802.11n HT40	06	2483.56	51.25	54.00	-2.75	H	Avg.	Pass	-	Band Edge
	802.11n HT40	06	7311.00	38.49	54.00	-15.51	V	Avg.	Pass	-	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11n HT40	09	2483.54	51.77	54.00	-2.23	H	Avg.	Pass	-	Band Edge
	802.11n HT40	09	7356.00	38.32	54.00	-15.68	V	Avg.	Pass	-	Harmonic
13	LF	09	33.88	33.98	40.00	-6.02	V	Peak	Pass	-	LF
14	SHF	09	24706.00	40.74	74.00	-33.26	V	Peak	Pass	-	SHF

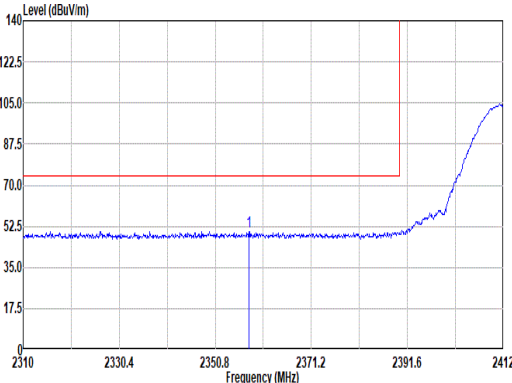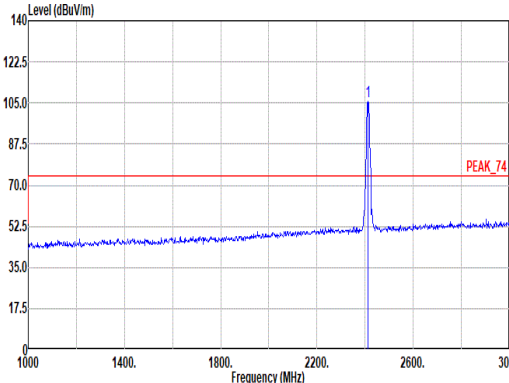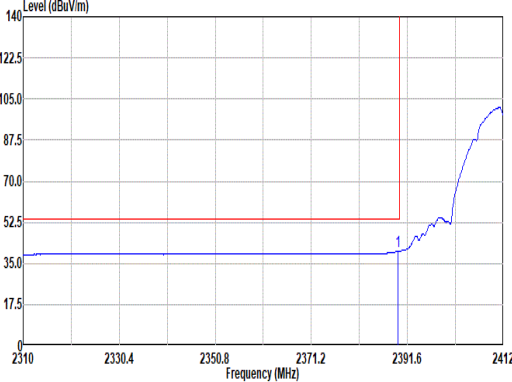
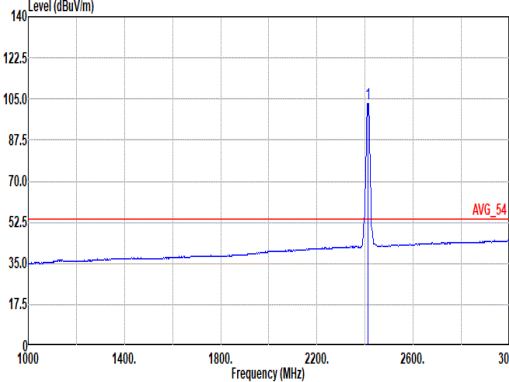


		1																																																																																																
Mode	Band Edge																																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 14 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2357.94</td><td>50.36</td><td>74.00</td><td>-23.64</td><td>37.58</td><td>26.98</td><td>8.68</td><td>32.91</td><td>10.03</td><td>141 47 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2357.94	50.36	74.00	-23.64	37.58	26.98	8.68	32.91	10.03	141 47 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 14 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>105.45</td><td>-----</td><td>-----</td><td>92.72</td><td>26.86</td><td>8.79</td><td>32.95</td><td>10.03</td><td>141 47 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2412.00	105.45	-----	-----	92.72	26.86	8.79	32.95	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	2357.94	50.36	74.00	-23.64	37.58	26.98	8.68	32.91	10.03	141 47 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																									
1	2412.00	105.45	-----	-----	92.72	26.86	8.79	32.95	10.03	141 47 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 14 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2389.56</td><td>40.20</td><td>54.00</td><td>-13.80</td><td>27.65</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>141 47 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2389.56	40.20	54.00	-13.80	27.65	26.70	8.75	32.93	10.03	141 47 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 14 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>103.27</td><td>-----</td><td>-----</td><td>90.54</td><td>26.86</td><td>8.79</td><td>32.95</td><td>10.03</td><td>141 47 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2412.00	103.27	-----	-----	90.54	26.86	8.79	32.95	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																									
1	2389.56	40.20	54.00	-13.80	27.65	26.70	8.75	32.93	10.03	141 47 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																									
1	2412.00	103.27	-----	-----	90.54	26.86	8.79	32.95	10.03	141 47 AVERAGE																																																																																								

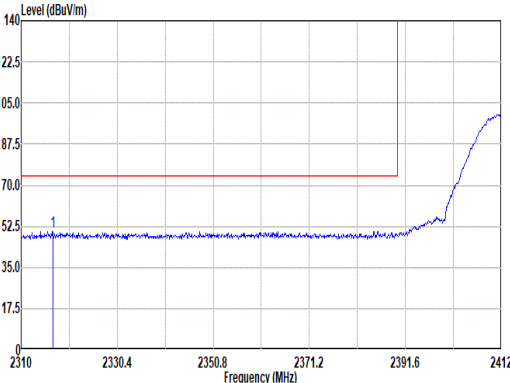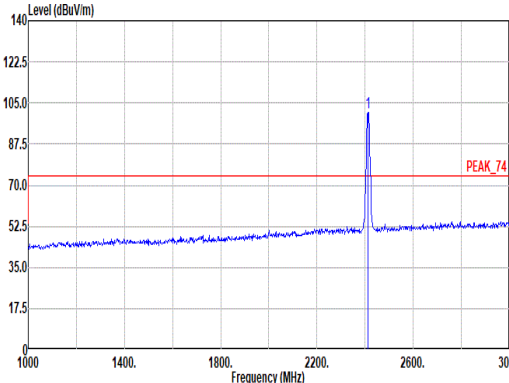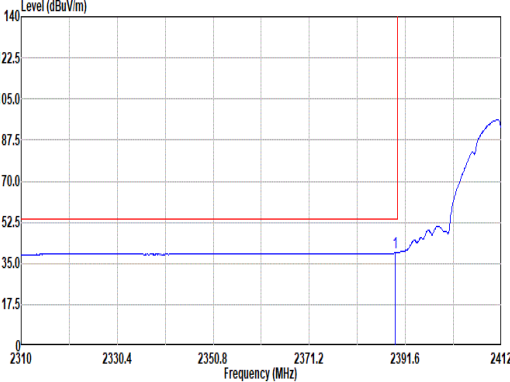
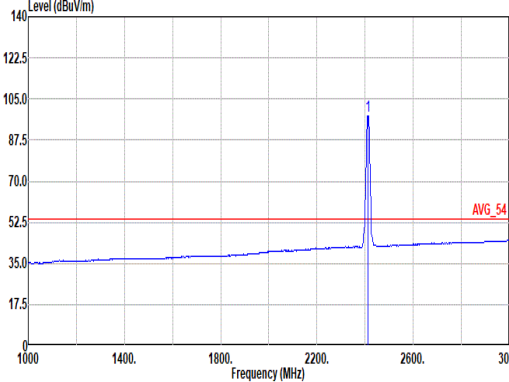


Mode	1																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11b_CH01_2412MHz																																																																																								
ANT	1+2																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 14 Plane : Y with Adapter <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2316.73</td><td>50.35</td><td>74.00</td><td>-23.65</td><td>37.63</td><td>26.97</td><td>8.60</td><td>32.88</td><td>10.03</td><td>265</td><td>0</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2316.73	50.35	74.00	-23.65	37.63	26.97	8.60	32.88	10.03	265	0	PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 14 Plane : Y with Adapter <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.88</td><td>-----</td><td>-----</td><td>88.18</td><td>26.82</td><td>8.80</td><td>32.95</td><td>10.03</td><td>265</td><td>0</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	100.88	-----	-----	88.18	26.82	8.80	32.95	10.03	265	0
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2316.73	50.35	74.00	-23.65	37.63	26.97	8.60	32.88	10.03	265	0	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	100.88	-----	-----	88.18	26.82	8.80	32.95	10.03	265	0	PEAK																																																																													
Avg																																																																																									
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 14 Plane : Y with Adapter <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.36</td><td>39.54</td><td>54.00</td><td>-14.46</td><td>26.99</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>265</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.36	39.54	54.00	-14.46	26.99	26.70	8.75	32.93	10.03	265	0	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 14 Plane : Y with Adapter <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>97.92</td><td>-----</td><td>-----</td><td>85.19</td><td>26.86</td><td>8.79</td><td>32.95</td><td>10.03</td><td>265</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	97.92	-----	-----	85.19	26.86	8.79	32.95	10.03	265	0
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.36	39.54	54.00	-14.46	26.99	26.70	8.75	32.93	10.03	265	0	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	97.92	-----	-----	85.19	26.86	8.79	32.95	10.03	265	0	AVERAGE																																																																													



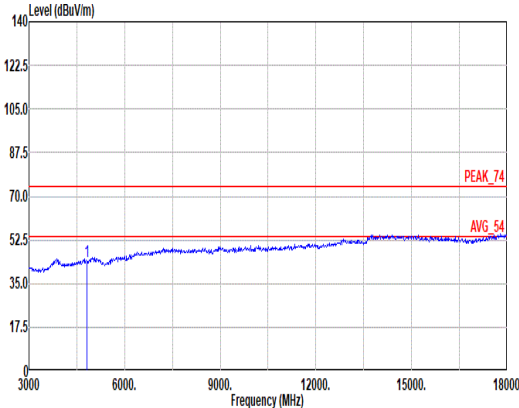
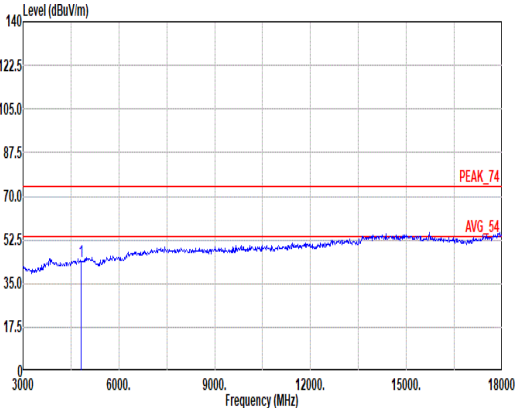


Mode	1																																																						
	Harmonic																																																						
	2400-2483.5_802.11b_CH01_2412MHz																																																						
ANT	1+2																																																						
Pol.	Horizontal								Vertical																																														
Peak Avg																																																							
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 1 Setting : Plane :																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 4824.00</td><td>44.10</td><td>74.00</td><td>-29.90</td><td>32.92</td><td>32.25</td><td>12.68</td><td>34.18</td><td>0.43</td><td>--</td></tr></table>																	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 4824.00	44.10	74.00	-29.90	32.92	32.25	12.68	34.18	0.43
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																														
1 4824.00	44.10	74.00	-29.90	32.92	32.25	12.68	34.18	0.43	--																																														
Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 1 Setting : Plane :																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 4824.00</td><td>43.86</td><td>74.00</td><td>-30.14</td><td>32.68</td><td>32.25</td><td>12.68</td><td>34.18</td><td>0.43</td><td>--</td></tr></table>																	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1 4824.00	43.86	74.00	-30.14	32.68	32.25	12.68	34.18	0.43	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																														
1 4824.00	43.86	74.00	-30.14	32.68	32.25	12.68	34.18	0.43	--																																														

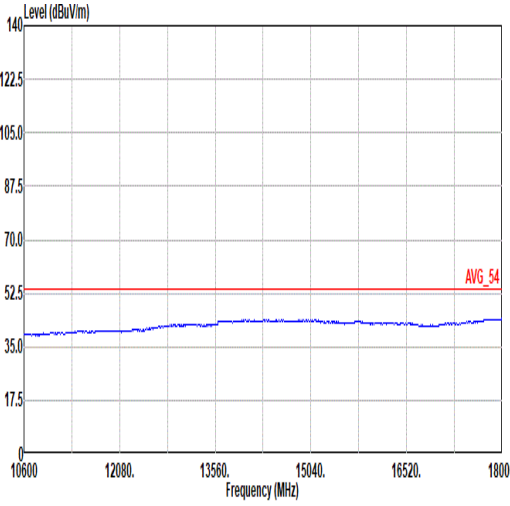
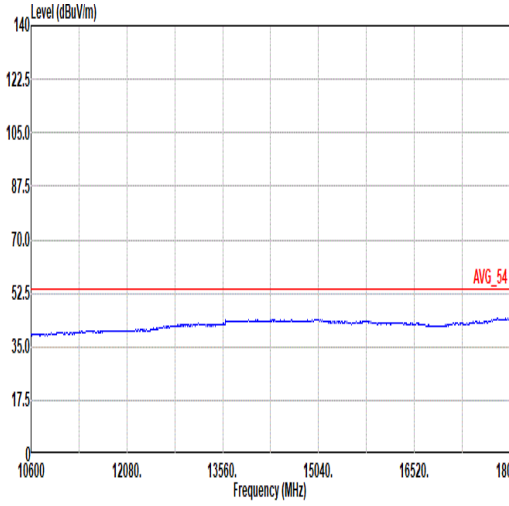


Mode	1	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 1 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 1 Setting : Plane :

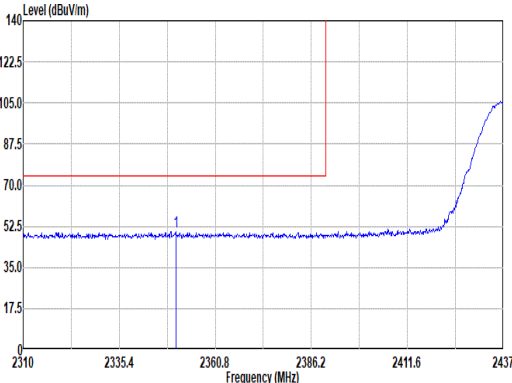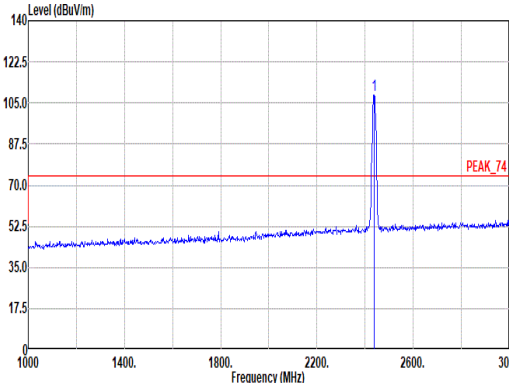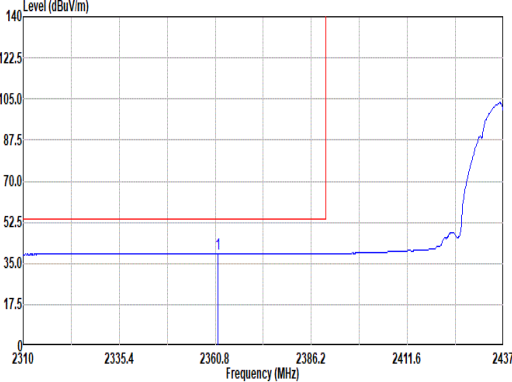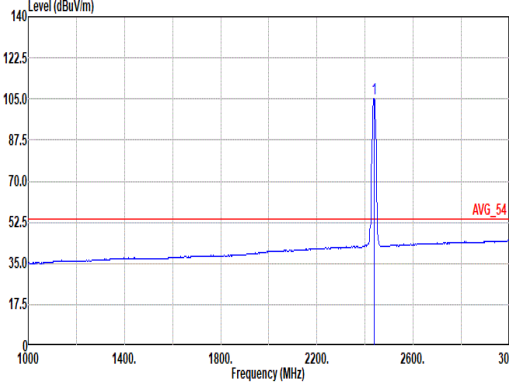

		2																																																																																																
Mode	Band Edge - L																																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2350.39</td><td>50.34</td><td>74.00</td><td>-23.66</td><td>37.65</td><td>26.90</td><td>8.67</td><td>32.91</td><td>10.03</td><td>270 56 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2350.39	50.34	74.00	-23.66	37.65	26.90	8.67	32.91	10.03	270 56 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>108.12</td><td>-----</td><td>-----</td><td>95.53</td><td>26.68</td><td>8.85</td><td>32.97</td><td>10.03</td><td>270 56 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	108.12	-----	-----	95.53	26.68	8.85	32.97	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2350.39	50.34	74.00	-23.66	37.65	26.90	8.67	32.91	10.03	270 56 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	108.12	-----	-----	95.53	26.68	8.85	32.97	10.03	270 56 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2361.56</td><td>39.17</td><td>54.00</td><td>-14.83</td><td>26.38</td><td>26.98</td><td>8.69</td><td>32.91</td><td>10.03</td><td>270 56 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2361.56	39.17	54.00	-14.83	26.38	26.98	8.69	32.91	10.03	270 56 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>105.26</td><td>-----</td><td>-----</td><td>92.67</td><td>26.68</td><td>8.85</td><td>32.97</td><td>10.03</td><td>270 56 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	105.26	-----	-----	92.67	26.68	8.85	32.97	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2361.56	39.17	54.00	-14.83	26.38	26.98	8.69	32.91	10.03	270 56 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	105.26	-----	-----	92.67	26.68	8.85	32.97	10.03	270 56 AVERAGE																																																																																								

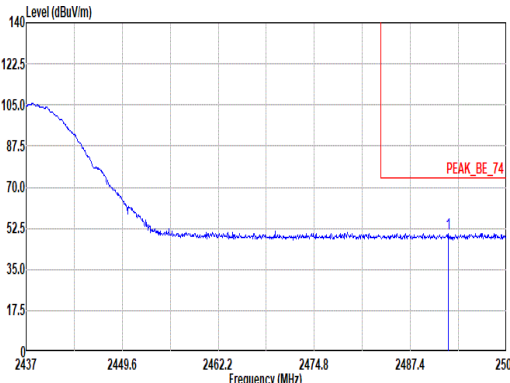
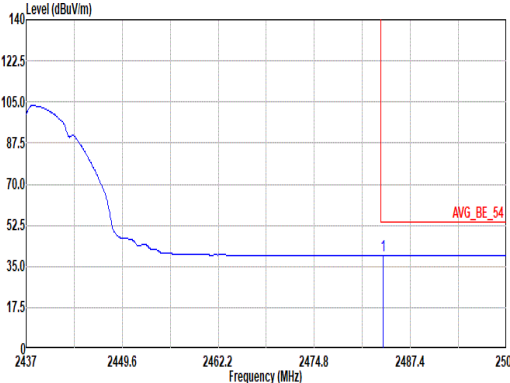


Mode	2																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11b_CH06_2437MHz																																																					
ANT	1+2																																																					
Pol.	Horizontal						Fundamental																																															
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.38</td><td>50.37</td><td>74.00</td><td>-23.63</td><td>37.68</td><td>26.70</td><td>8.96</td><td>33.00</td><td>10.03</td><td>270</td><td>56 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.38	50.37	74.00	-23.63	37.68	26.70	8.96	33.00	10.03	270	56 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2492.38	50.37	74.00	-23.63	37.68	26.70	8.96	33.00	10.03	270	56 PEAK																																											
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.81</td><td>39.53</td><td>54.00</td><td>-14.47</td><td>26.92</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>270</td><td>56 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.81	39.53	54.00	-14.47	26.92	26.64	8.94	33.00	10.03	270	56 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.81	39.53	54.00	-14.47	26.92	26.64	8.94	33.00	10.03	270	56 AVERAGE																																											





Mode	2																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																			
ANT	1+2																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2347.21</td><td>50.63</td><td>74.00</td><td>-23.37</td><td>37.97</td><td>26.87</td><td>8.66</td><td>32.90</td><td>10.03</td><td>268</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2347.21	50.63	74.00	-23.37	37.97	26.87	8.66	32.90	10.03	268	360	PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>105.64</td><td>-----</td><td>-----</td><td>93.05</td><td>26.68</td><td>8.85</td><td>32.97</td><td>10.03</td><td>268</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	105.64	-----	-----	93.05	26.68	8.85	32.97	10.03	268	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2347.21	50.63	74.00	-23.37	37.97	26.87	8.66	32.90	10.03	268	360	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	105.64	-----	-----	93.05	26.68	8.85	32.97	10.03	268	360	PEAK																																																																																								
Avg	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2368.17</td><td>39.13</td><td>54.00</td><td>-14.87</td><td>26.32</td><td>27.00</td><td>8.69</td><td>32.91</td><td>10.03</td><td>268</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2368.17	39.13	54.00	-14.87	26.32	27.00	8.69	32.91	10.03	268	360	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>102.97</td><td>-----</td><td>-----</td><td>90.38</td><td>26.68</td><td>8.85</td><td>32.97</td><td>10.03</td><td>268</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	102.97	-----	-----	90.38	26.68	8.85	32.97	10.03	268	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2368.17	39.13	54.00	-14.87	26.32	27.00	8.69	32.91	10.03	268	360	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	102.97	-----	-----	90.38	26.68	8.85	32.97	10.03	268	360	AVERAGE																																																																																								

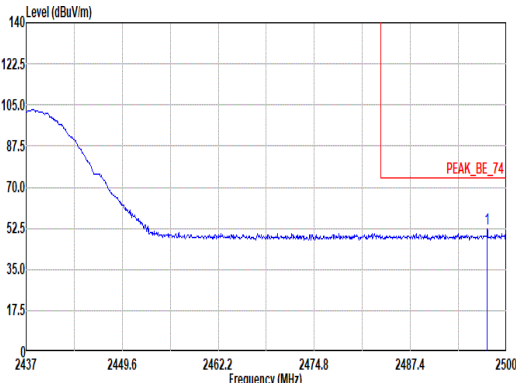
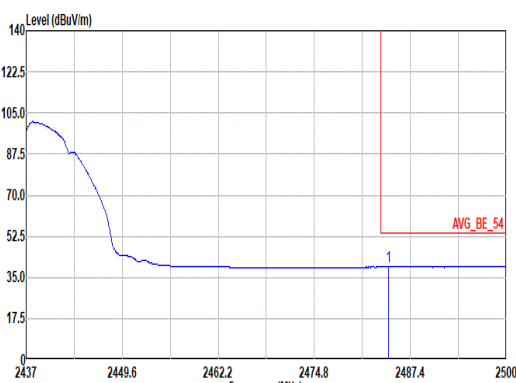


Mode	2																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																							
ANT	1+2																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : V with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.48</td><td>52.08</td><td>74.00</td><td>-21.92</td><td>39.39</td><td>26.70</td><td>8.97</td><td>33.01</td><td>10.03</td><td>268</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.48	52.08	74.00	-21.92	39.39	26.70	8.97	33.01	10.03	268	360	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2497.48	52.08	74.00	-21.92	39.39	26.70	8.97	33.01	10.03	268	360	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 14.5 Plane : V with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.50</td><td>39.44</td><td>54.00</td><td>-14.56</td><td>26.82</td><td>26.65</td><td>8.94</td><td>33.00</td><td>10.03</td><td>268</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.50	39.44	54.00	-14.56	26.82	26.65	8.94	33.00	10.03	268	360	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.50	39.44	54.00	-14.56	26.82	26.65	8.94	33.00	10.03	268	360	AVERAGE																																												



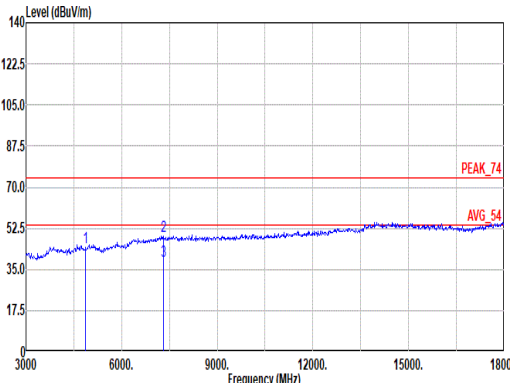
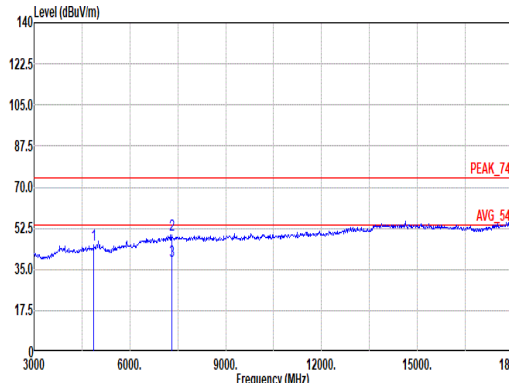


Mode	2																																																																																	
	Harmonic																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Horizontal						Vertical																																																																											
Peak Avg																																																																																		
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 2 Setting : Plane :						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 2 Setting : Plane :																																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.23</td><td>74.00</td><td>-29.77</td><td>32.91</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>48.89</td><td>74.00</td><td>-25.11</td><td>32.30</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>38.44</td><td>54.00</td><td>-15.56</td><td>21.85</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	44.23	74.00	-29.77	32.91	32.35	12.73	34.18	0.42	--	--	PEAK	2	7311.00	48.89	74.00	-25.11	32.30	36.72	15.95	36.71	0.63	--	--	PEAK	3	7311.00	38.44	54.00	-15.56	21.85	36.72	15.95	36.71	0.63	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1	4874.00	44.23	74.00	-29.77	32.91	32.35	12.73	34.18	0.42	--	--	PEAK																																																																						
2	7311.00	48.89	74.00	-25.11	32.30	36.72	15.95	36.71	0.63	--	--	PEAK																																																																						
3	7311.00	38.44	54.00	-15.56	21.85	36.72	15.95	36.71	0.63	--	--	AVERAGE																																																																						



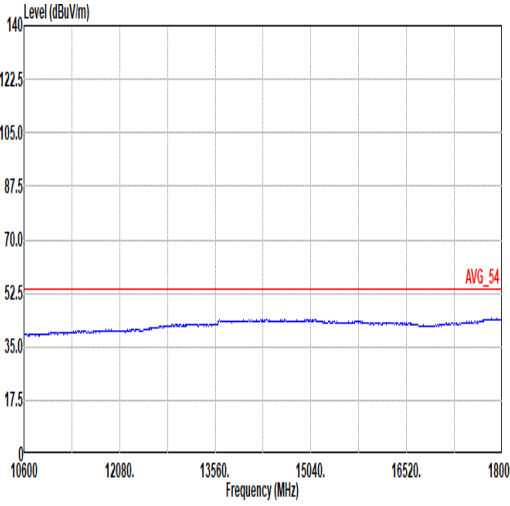
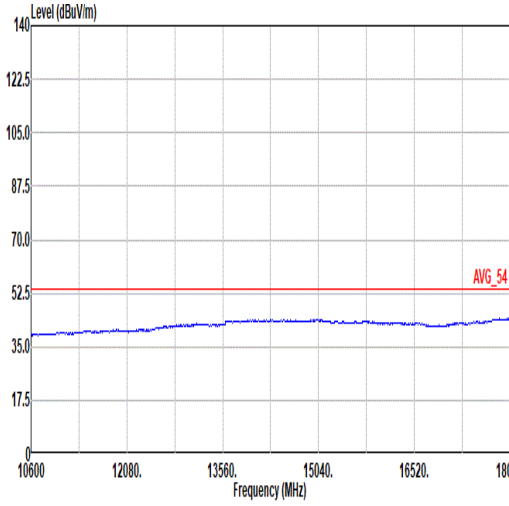


Mode	2	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 2 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 2 Setting : Plane :

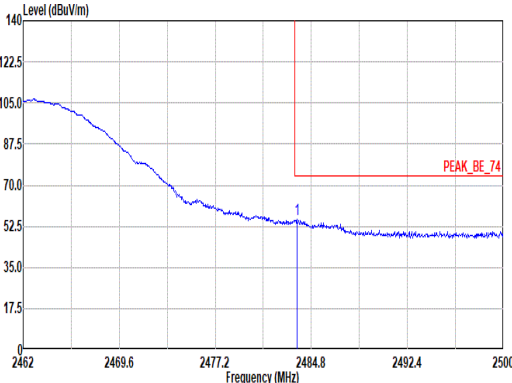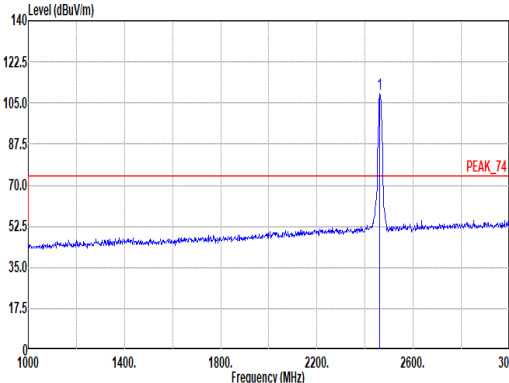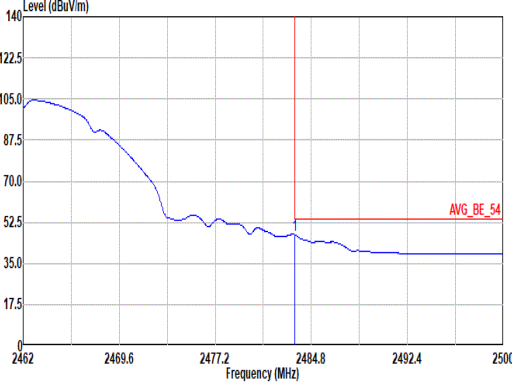
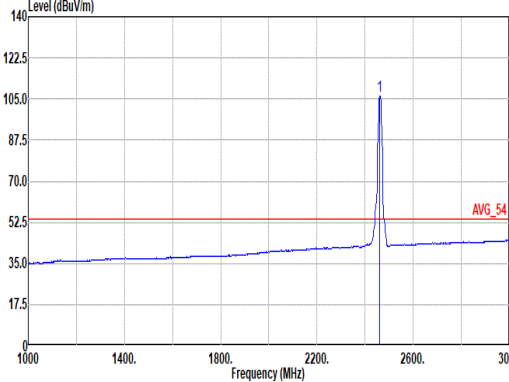


Mode	3																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																			
ANT	1+2																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto Detector : PEAK Mode : 3 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>55.43</td><td>74.00</td><td>-18.57</td><td>42.82</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>182</td><td>41</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	55.43	74.00	-18.57	42.82	26.64	8.94	33.00	10.03	182	41	PEAK	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto Detector : PEAK Mode : 3 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.59</td><td>-----</td><td>-----</td><td>96.14</td><td>26.50</td><td>8.90</td><td>32.98</td><td>10.03</td><td>182</td><td>41</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.59	-----	-----	96.14	26.50	8.90	32.98	10.03	182	41	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.66	55.43	74.00	-18.57	42.82	26.64	8.94	33.00	10.03	182	41	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	108.59	-----	-----	96.14	26.50	8.90	32.98	10.03	182	41	PEAK																																																																																								
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SWT:Auto Detector : PEAK Mode : 3 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>47.14</td><td>54.00</td><td>-6.86</td><td>34.53</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>182</td><td>41</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	47.14	54.00	-6.86	34.53	26.64	8.94	33.00	10.03	182	41	AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SWT:Auto Detector : PEAK Mode : 3 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.09</td><td>-----</td><td>-----</td><td>93.64</td><td>26.50</td><td>8.90</td><td>32.98</td><td>10.03</td><td>182</td><td>41</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.09	-----	-----	93.64	26.50	8.90	32.98	10.03	182	41	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.51	47.14	54.00	-6.86	34.53	26.64	8.94	33.00	10.03	182	41	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	106.09	-----	-----	93.64	26.50	8.90	32.98	10.03	182	41	AVERAGE																																																																																								

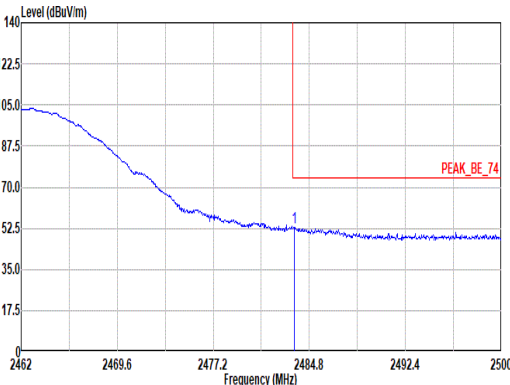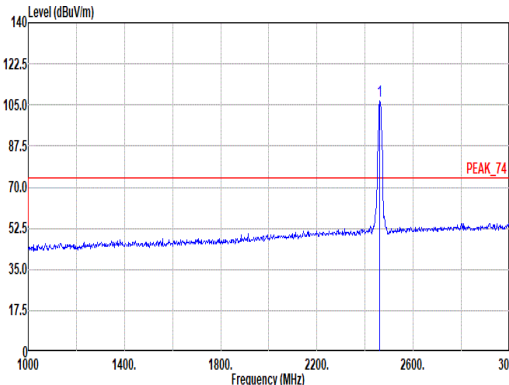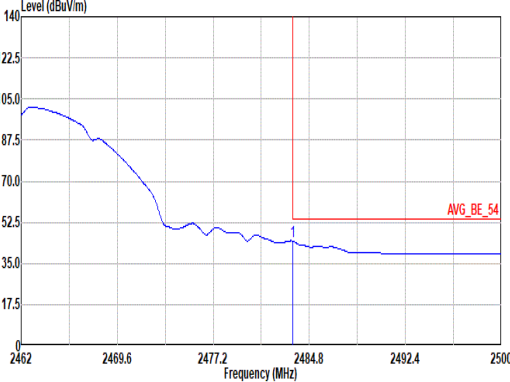
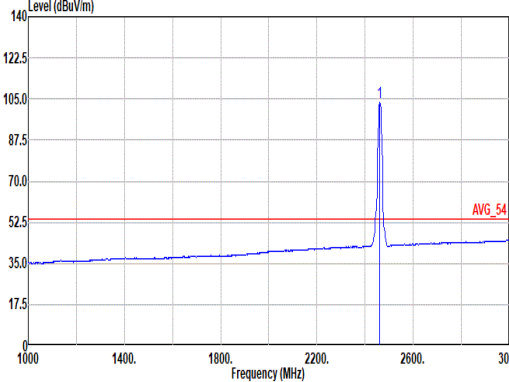


Mode	3																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																
ANT	1+2																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>52.83</td><td>74.00</td><td>-21.17</td><td>40.22</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>251</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	52.83	74.00	-21.17	40.22	26.64	8.94	33.00	10.03	251	0 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.63</td><td>-----</td><td>-----</td><td>94.18</td><td>26.50</td><td>8.90</td><td>32.98</td><td>10.03</td><td>251</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.63	-----	-----	94.18	26.50	8.90	32.98	10.03	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.58	52.83	74.00	-21.17	40.22	26.64	8.94	33.00	10.03	251	0 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	106.63	-----	-----	94.18	26.50	8.90	32.98	10.03	251	0 PEAK																																																																																						
Avg																																																																																																	
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>44.46</td><td>54.00</td><td>-9.54</td><td>31.85</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>251</td><td>0 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	44.46	54.00	-9.54	31.85	26.64	8.94	33.00	10.03	251	0 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 14.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>103.51</td><td>-----</td><td>-----</td><td>91.07</td><td>26.50</td><td>8.89</td><td>32.98</td><td>10.03</td><td>251</td><td>0 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.51	-----	-----	91.07	26.50	8.89	32.98	10.03	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.51	44.46	54.00	-9.54	31.85	26.64	8.94	33.00	10.03	251	0 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	103.51	-----	-----	91.07	26.50	8.89	32.98	10.03	251	0 AVERAGE																																																																																						



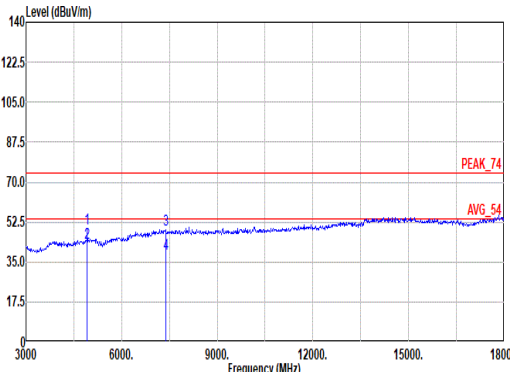
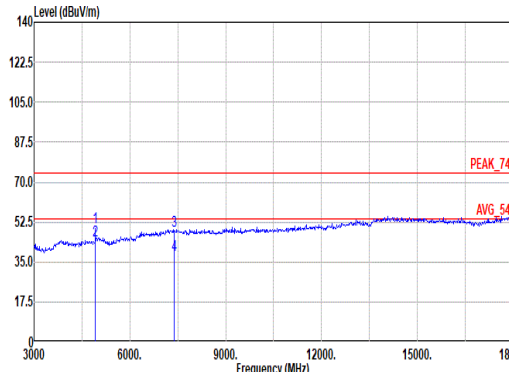


Mode	3																																																																																													
	Harmonic																																																																																													
	2400-2483.5_802.11b_CH11_2462MHz																																																																																													
ANT	1+2																																																																																													
Pol.	Horizontal						Vertical																																																																																							
Peak Avg																																																																																														
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 3 Setting : Plane :						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 3 Setting : Plane :																																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>49.57</td><td>74.00</td><td>-24.43</td><td>38.03</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>106</td><td>58</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>43.37</td><td>54.00</td><td>-10.63</td><td>31.83</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>106</td><td>58</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>49.22</td><td>74.00</td><td>-24.78</td><td>32.43</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7386.00</td><td>38.34</td><td>54.00</td><td>-15.66</td><td>21.55</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	49.57	74.00	-24.43	38.03	32.54	12.78	34.19	0.41	106	58	PEAK	2	4924.00	43.37	54.00	-10.63	31.83	32.54	12.78	34.19	0.41	106	58	AVERAGE	3	7386.00	49.22	74.00	-24.78	32.43	36.80	16.04	36.77	0.72	--	--	PEAK	4	7386.00	38.34	54.00	-15.66	21.55	36.80	16.04	36.77	0.72	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	4924.00	49.57	74.00	-24.43	38.03	32.54	12.78	34.19	0.41	106	58	PEAK																																																																																		
2	4924.00	43.37	54.00	-10.63	31.83	32.54	12.78	34.19	0.41	106	58	AVERAGE																																																																																		
3	7386.00	49.22	74.00	-24.78	32.43	36.80	16.04	36.77	0.72	--	--	PEAK																																																																																		
4	7386.00	38.34	54.00	-15.66	21.55	36.80	16.04	36.77	0.72	--	--	AVERAGE																																																																																		



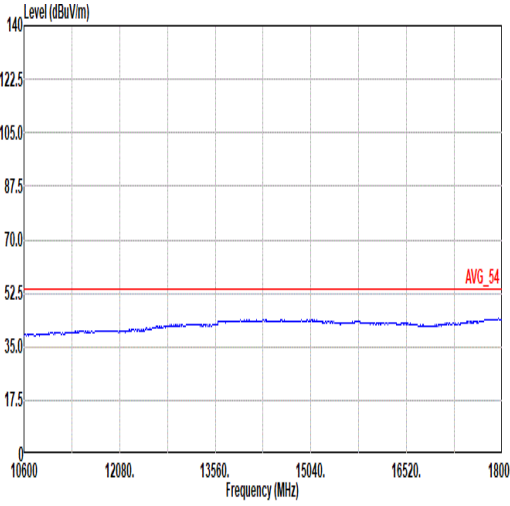
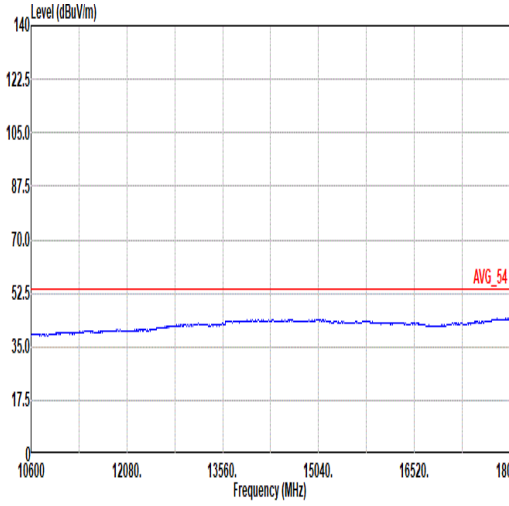


Mode	3	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 3 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 3 Setting : Plane :

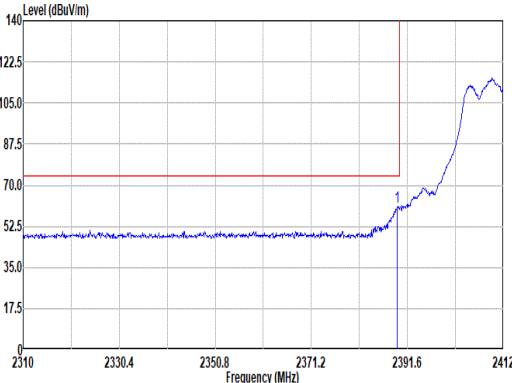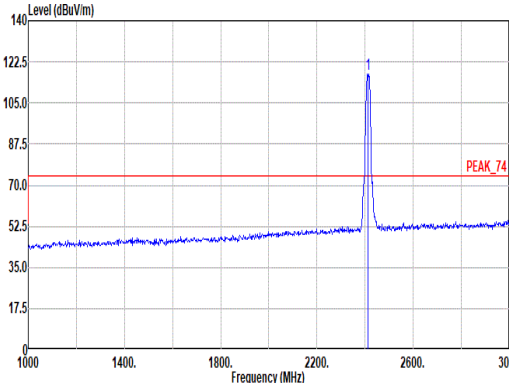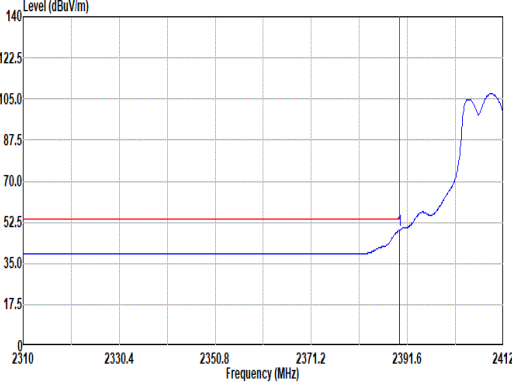
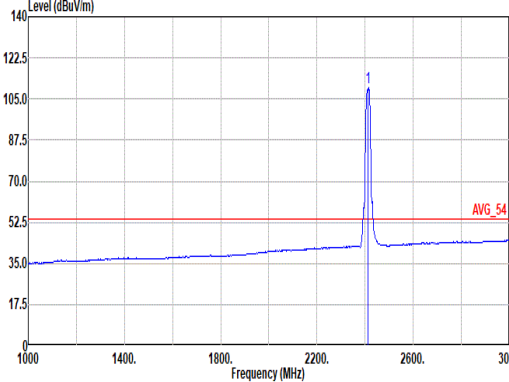


		4																																																																																																					
Mode	Band Edge																																																																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																						
ANT	1+2																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.46</td><td>60.98</td><td>74.00</td><td>-13.02</td><td>48.43</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>183</td><td>23</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.46	60.98	74.00	-13.02	48.43	26.70	8.75	32.93	10.03	183	23	PEAK	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>117.16</td><td>-----</td><td>-----</td><td>104.46</td><td>26.82</td><td>8.80</td><td>32.95</td><td>10.03</td><td>183</td><td>23</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	117.16	-----	-----	104.46	26.82	8.80	32.95	10.03	183	23	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2389.46	60.98	74.00	-13.02	48.43	26.70	8.75	32.93	10.03	183	23	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2412.00	117.16	-----	-----	104.46	26.82	8.80	32.95	10.03	183	23	PEAK																																																																																											
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.97</td><td>49.18</td><td>54.00</td><td>-4.82</td><td>36.63</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>183</td><td>23</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.97	49.18	54.00	-4.82	36.63	26.70	8.75	32.93	10.03	183	23	AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.70</td><td>-----</td><td>-----</td><td>97.00</td><td>26.82</td><td>8.80</td><td>32.95</td><td>10.03</td><td>183</td><td>23</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.70	-----	-----	97.00	26.82	8.80	32.95	10.03	183	23	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2389.97	49.18	54.00	-4.82	36.63	26.70	8.75	32.93	10.03	183	23	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2412.00	109.70	-----	-----	97.00	26.82	8.80	32.95	10.03	183	23	AVERAGE																																																																																											

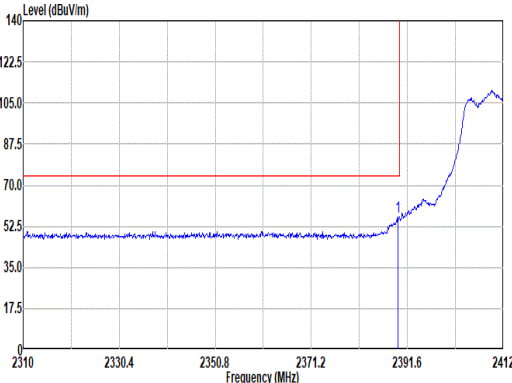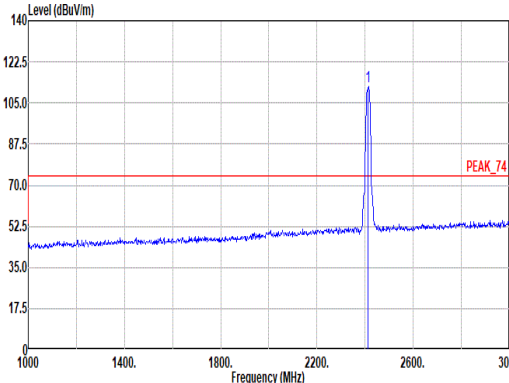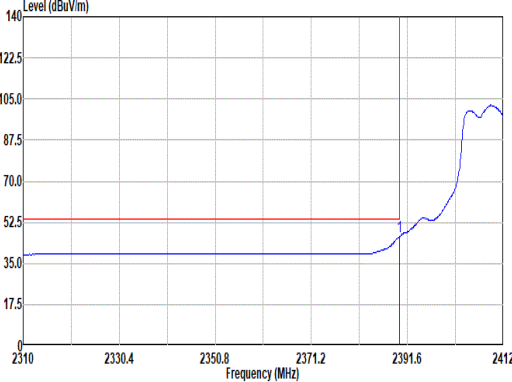
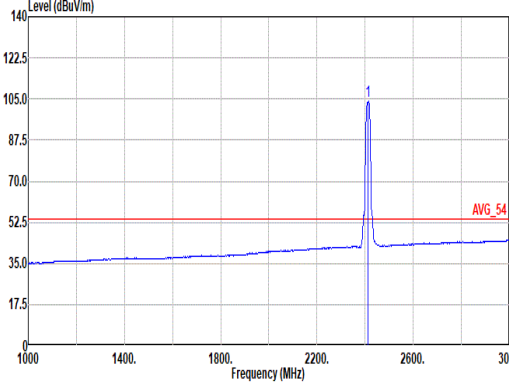


		4																																																																																																		
Mode	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																			
ANT	1+2																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2389.56</td><td>56.41</td><td>74.00</td><td>-17.59</td><td>43.86</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>237</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2389.56	56.41	74.00	-17.59	43.86	26.70	8.75	32.93	10.03	237	0 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2412.00</td><td>112.03</td><td>-----</td><td>-----</td><td>99.33</td><td>26.82</td><td>8.80</td><td>32.95</td><td>10.03</td><td>237</td><td>0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2412.00	112.03	-----	-----	99.33	26.82	8.80	32.95	10.03	237
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																										
1	2389.56	56.41	74.00	-17.59	43.86	26.70	8.75	32.93	10.03	237	0 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																										
1	2412.00	112.03	-----	-----	99.33	26.82	8.80	32.95	10.03	237	0 PEAK																																																																																									
Avg																																																																																																				
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2389.97</td><td>46.45</td><td>54.00</td><td>-7.55</td><td>33.90</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>237</td><td>0 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2389.97	46.45	54.00	-7.55	33.90	26.70	8.75	32.93	10.03	237	0 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2412.00</td><td>104.06</td><td>-----</td><td>-----</td><td>91.36</td><td>26.82</td><td>8.80</td><td>32.95</td><td>10.03</td><td>237</td><td>0 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2412.00	104.06	-----	-----	91.36	26.82	8.80	32.95	10.03	237
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																										
1	2389.97	46.45	54.00	-7.55	33.90	26.70	8.75	32.93	10.03	237	0 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																										
1	2412.00	104.06	-----	-----	91.36	26.82	8.80	32.95	10.03	237	0 AVERAGE																																																																																									



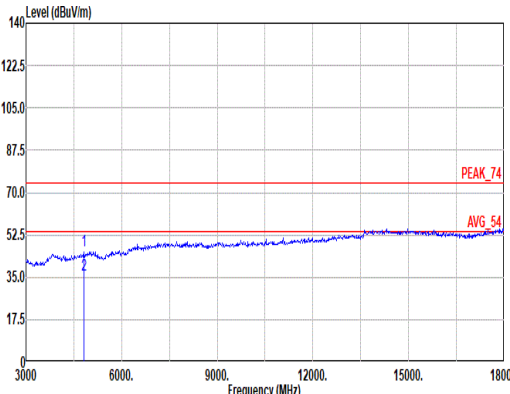
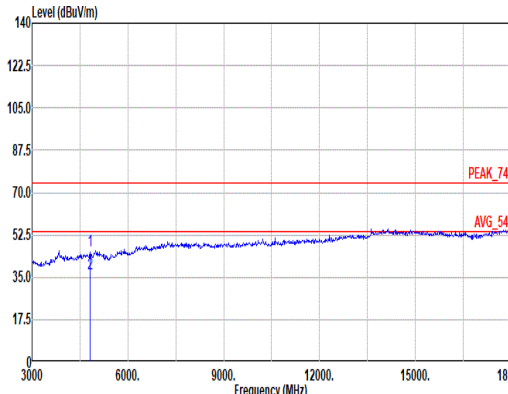


Mode	4																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																			
ANT	1+2																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 4 Setting : Plane : <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>46.00</td><td>74.00</td><td>-28.00</td><td>34.82</td><td>32.25</td><td>12.68</td><td>34.18</td><td>0.43</td><td>119</td><td>27</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>35.89</td><td>54.00</td><td>-18.11</td><td>24.71</td><td>32.25</td><td>12.68</td><td>34.18</td><td>0.43</td><td>119</td><td>27</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	46.00	74.00	-28.00	34.82	32.25	12.68	34.18	0.43	119	27	PEAK	2	4824.00	35.89	54.00	-18.11	24.71	32.25	12.68	34.18	0.43	119	27	AVERAGE	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 4 Setting : Plane : <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>46.06</td><td>74.00</td><td>-27.94</td><td>34.88</td><td>32.25</td><td>12.68</td><td>34.18</td><td>0.43</td><td>340</td><td>176</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>36.42</td><td>54.00</td><td>-17.58</td><td>25.24</td><td>32.25</td><td>12.68</td><td>34.18</td><td>0.43</td><td>340</td><td>176</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	46.06	74.00	-27.94	34.88	32.25	12.68	34.18	0.43	340	176	PEAK	2	4824.00	36.42	54.00	-17.58	25.24	32.25	12.68	34.18	0.43	340	176	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	4824.00	46.00	74.00	-28.00	34.82	32.25	12.68	34.18	0.43	119	27	PEAK																																																																																																								
2	4824.00	35.89	54.00	-18.11	24.71	32.25	12.68	34.18	0.43	119	27	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	4824.00	46.06	74.00	-27.94	34.88	32.25	12.68	34.18	0.43	340	176	PEAK																																																																																																								
2	4824.00	36.42	54.00	-17.58	25.24	32.25	12.68	34.18	0.43	340	176	AVERAGE																																																																																																								

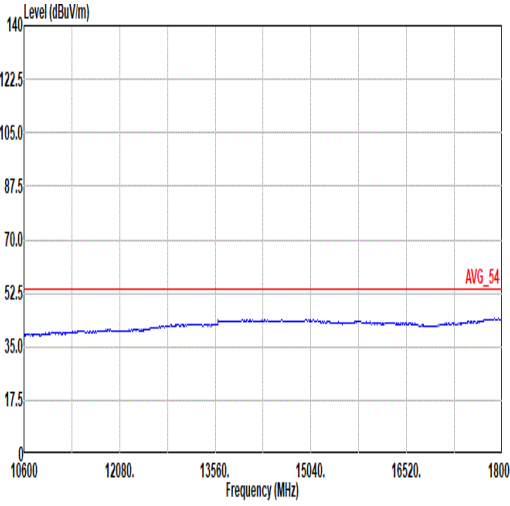
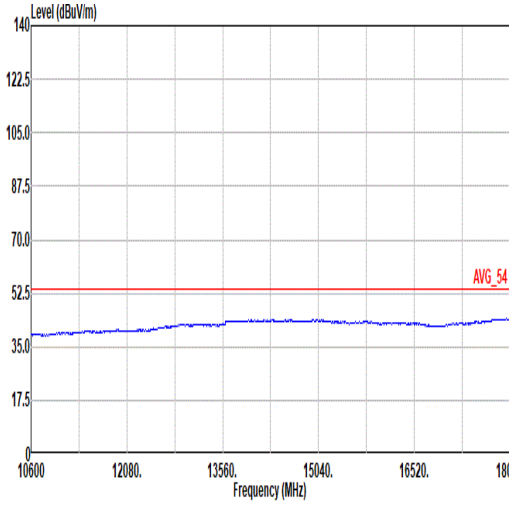


Mode	4	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 4 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 4 Setting : Plane :

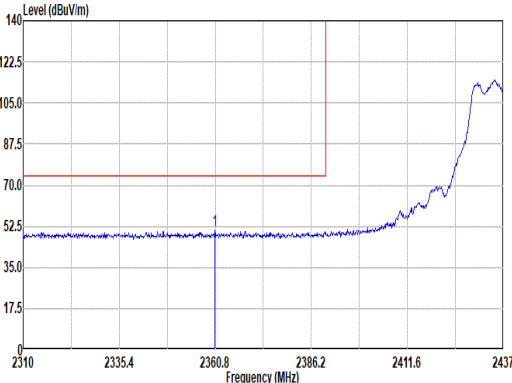
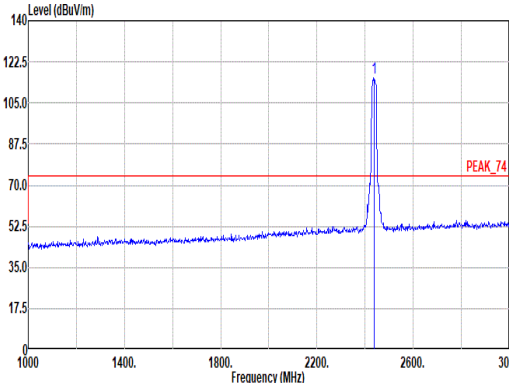
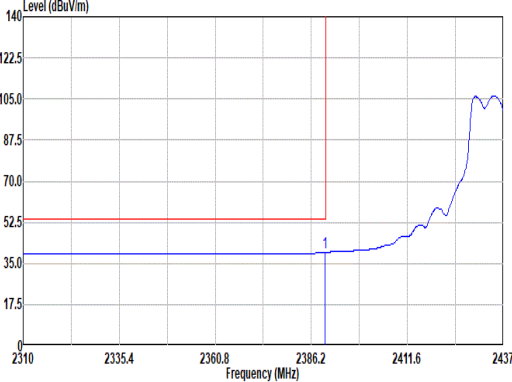
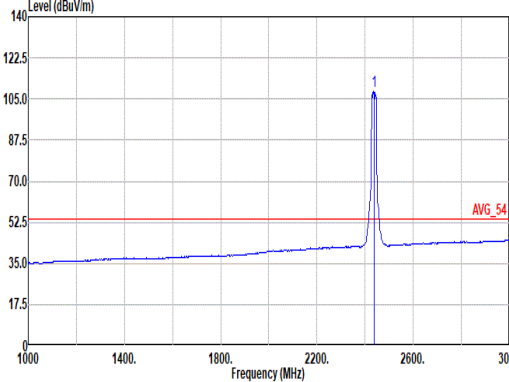


		5																																																																																																											
Mode	Band Edge - L																																																																																																												
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																												
ANT	1+2																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																						
Peak																																																																																																													
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2360.67</td><td>50.65</td><td>74.00</td><td>-23.35</td><td>37.85</td><td>26.99</td><td>8.69</td><td>32.91</td><td>10.03</td><td>148</td><td>34</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2360.67	50.65	74.00	-23.35	37.85	26.99	8.69	32.91	10.03	148	34	PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>115.50</td><td>-----</td><td>-----</td><td>102.94</td><td>26.66</td><td>8.84</td><td>32.97</td><td>10.03</td><td>148</td><td>34</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	115.50	-----	-----	102.94	26.66	8.84	32.97	10.03	148	34
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1	2360.67	50.65	74.00	-23.35	37.85	26.99	8.69	32.91	10.03	148	34	PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1	2437.00	115.50	-----	-----	102.94	26.66	8.84	32.97	10.03	148	34	PEAK																																																																																																	
Avg																																																																																																													
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.76</td><td>39.77</td><td>54.00</td><td>-14.23</td><td>27.22</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>148</td><td>34</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.76	39.77	54.00	-14.23	27.22	26.70	8.75	32.93	10.03	148	34	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>108.05</td><td>-----</td><td>-----</td><td>95.50</td><td>26.64</td><td>8.84</td><td>32.96</td><td>10.03</td><td>148</td><td>34</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	108.05	-----	-----	95.50	26.64	8.84	32.96	10.03	148	34
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1	2389.76	39.77	54.00	-14.23	27.22	26.70	8.75	32.93	10.03	148	34	AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1	2437.00	108.05	-----	-----	95.50	26.64	8.84	32.96	10.03	148	34	AVERAGE																																																																																																	

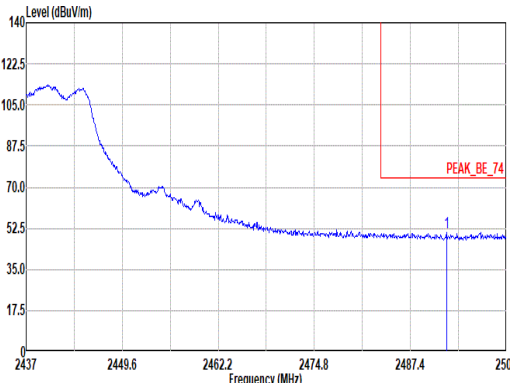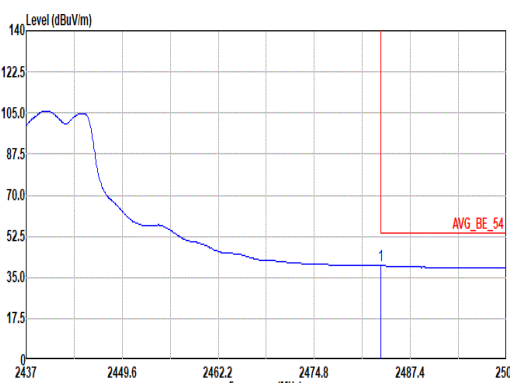

Mode	5																																													
	Band Edge - R																																													
	2400-2483.5_802.11g_CH06_2437MHz																																													
ANT	1+2																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : V with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.13</td><td>50.60</td><td>74.00</td><td>-23.40</td><td>37.91</td><td>26.70</td><td>8.96</td><td>33.00</td><td>10.03</td><td>148</td><td>34</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.13	50.60	74.00	-23.40	37.91	26.70	8.96	33.00	10.03	148	34	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2492.13	50.60	74.00	-23.40	37.91	26.70	8.96	33.00	10.03	148	34	PEAK																																		
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : V with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>39.93</td><td>54.00</td><td>-14.07</td><td>27.32</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>148</td><td>34</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	39.93	54.00	-14.07	27.32	26.64	8.94	33.00	10.03	148	34	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.56	39.93	54.00	-14.07	27.32	26.64	8.94	33.00	10.03	148	34	AVERAGE																																		

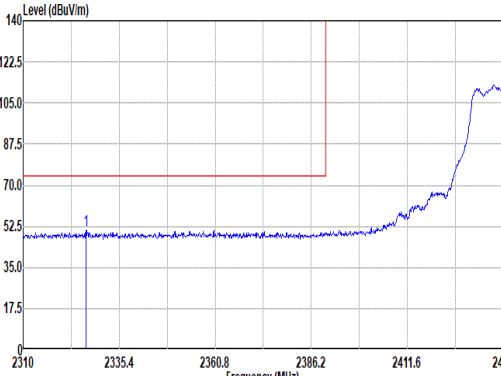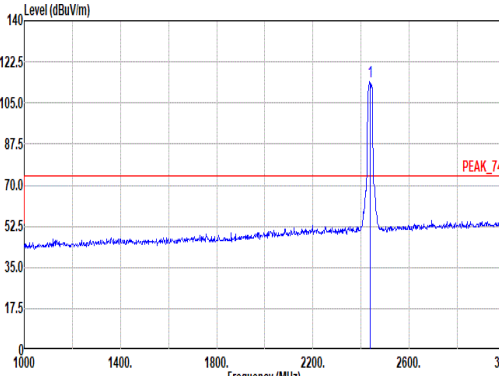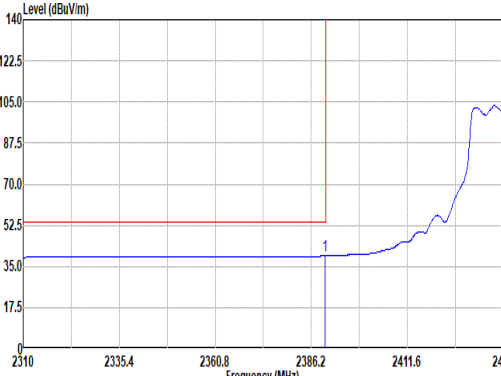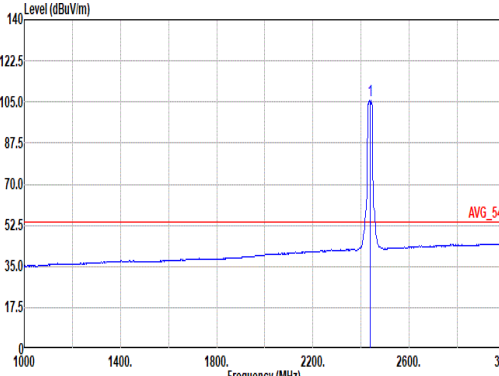

		5																																																																																																									
Mode	Band Edge - L																																																																																																										
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																										
ANT	1+2																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2326.64</td><td>50.62</td><td>74.00</td><td>-23.38</td><td>37.93</td><td>26.93</td><td>8.62</td><td>32.89</td><td>10.03</td><td>200</td><td>14 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2326.64	50.62	74.00	-23.38	37.93	26.93	8.62	32.89	10.03	200	14 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>114.24</td><td>-----</td><td>-----</td><td>101.69</td><td>26.64</td><td>8.84</td><td>32.96</td><td>10.03</td><td>200</td><td>14 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	114.24	-----	-----	101.69	26.64	8.84	32.96	10.03	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2326.64	50.62	74.00	-23.38	37.93	26.93	8.62	32.89	10.03	200	14 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2437.00	114.24	-----	-----	101.69	26.64	8.84	32.96	10.03	200	14 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.88</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>26.93</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>200</td><td>14 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.88	39.48	54.00	-14.52	26.93	26.70	8.75	32.93	10.03	200	14 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>105.87</td><td>-----</td><td>-----</td><td>93.32</td><td>26.64</td><td>8.84</td><td>32.96</td><td>10.03</td><td>200</td><td>14 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	105.87	-----	-----	93.32	26.64	8.84	32.96	10.03	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.88	39.48	54.00	-14.52	26.93	26.70	8.75	32.93	10.03	200	14 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2437.00	105.87	-----	-----	93.32	26.64	8.84	32.96	10.03	200	14 AVERAGE																																																																																																





Mode	5																																																				
	Band Edge - R																																																				
	2400-2483.5_802.11g_CH06_2437MHz																																																				
ANT	1+2																																																				
Pol.	Vertical										Fundamental																																										
Peak	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : Y with Adapter <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.75</td><td>50.30</td><td>74.00</td><td>-23.70</td><td>37.69</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>200</td><td>14 PEAK</td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.75	50.30	74.00	-23.70	37.69	26.64	8.94	33.00	10.03	200	14 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1 2483.75	50.30	74.00	-23.70	37.69	26.64	8.94	33.00	10.03	200	14 PEAK																																											
Avg	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 18 Plane : Y with Adapter <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.87</td><td>39.71</td><td>54.00</td><td>-14.29</td><td>27.10</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>200</td><td>14 AVERAGE</td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.87	39.71	54.00	-14.29	27.10	26.64	8.94	33.00	10.03	200	14 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1 2483.87	39.71	54.00	-14.29	27.10	26.64	8.94	33.00	10.03	200	14 AVERAGE																																											







Mode	5																																																																																																																																																																					
	Harmonic																																																																																																																																																																					
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																																					
ANT	1+2																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																				
Peak Avg	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 5 Setting : Plane : <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>36.01</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>333</td><td>97</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>36.69</td><td>54.00</td><td>-17.31</td><td>25.37</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>333</td><td>97</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>50.65</td><td>74.00</td><td>-23.35</td><td>34.06</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>386</td><td>126</td><td>PEAK</td></tr><tr><td>4</td><td>7311.00</td><td>40.70</td><td>54.00</td><td>-13.30</td><td>24.11</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>386</td><td>126</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	4874.00	47.33	74.00	-26.67	36.01	32.35	12.73	34.18	0.42	333	97	PEAK	2	4874.00	36.69	54.00	-17.31	25.37	32.35	12.73	34.18	0.42	333	97	AVERAGE	3	7311.00	50.65	74.00	-23.35	34.06	36.72	15.95	36.71	0.63	386	126	PEAK	4	7311.00	40.70	54.00	-13.30	24.11	36.72	15.95	36.71	0.63	386	126	AVERAGE	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 5 Setting : Plane : <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>49.41</td><td>74.00</td><td>-24.59</td><td>38.09</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>316</td><td>187</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>38.58</td><td>54.00</td><td>-15.42</td><td>27.26</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>316</td><td>187</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>52.21</td><td>74.00</td><td>-21.79</td><td>35.62</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>285</td><td>171</td><td>PEAK</td></tr><tr><td>4</td><td>7311.00</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>25.85</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>285</td><td>171</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	4874.00	49.41	74.00	-24.59	38.09	32.35	12.73	34.18	0.42	316	187	PEAK	2	4874.00	38.58	54.00	-15.42	27.26	32.35	12.73	34.18	0.42	316	187	AVERAGE	3	7311.00	52.21	74.00	-21.79	35.62	36.72	15.95	36.71	0.63	285	171	PEAK	4	7311.00	42.44	54.00	-11.56	25.85	36.72	15.95	36.71	0.63	285	171	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																														
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																																																													
1	4874.00	47.33	74.00	-26.67	36.01	32.35	12.73	34.18	0.42	333	97	PEAK																																																																																																																																																										
2	4874.00	36.69	54.00	-17.31	25.37	32.35	12.73	34.18	0.42	333	97	AVERAGE																																																																																																																																																										
3	7311.00	50.65	74.00	-23.35	34.06	36.72	15.95	36.71	0.63	386	126	PEAK																																																																																																																																																										
4	7311.00	40.70	54.00	-13.30	24.11	36.72	15.95	36.71	0.63	386	126	AVERAGE																																																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																														
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																																																													
1	4874.00	49.41	74.00	-24.59	38.09	32.35	12.73	34.18	0.42	316	187	PEAK																																																																																																																																																										
2	4874.00	38.58	54.00	-15.42	27.26	32.35	12.73	34.18	0.42	316	187	AVERAGE																																																																																																																																																										
3	7311.00	52.21	74.00	-21.79	35.62	36.72	15.95	36.71	0.63	285	171	PEAK																																																																																																																																																										
4	7311.00	42.44	54.00	-11.56	25.85	36.72	15.95	36.71	0.63	285	171	AVERAGE																																																																																																																																																										



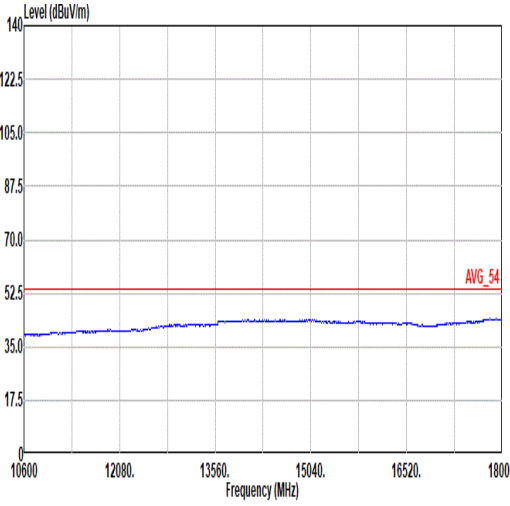
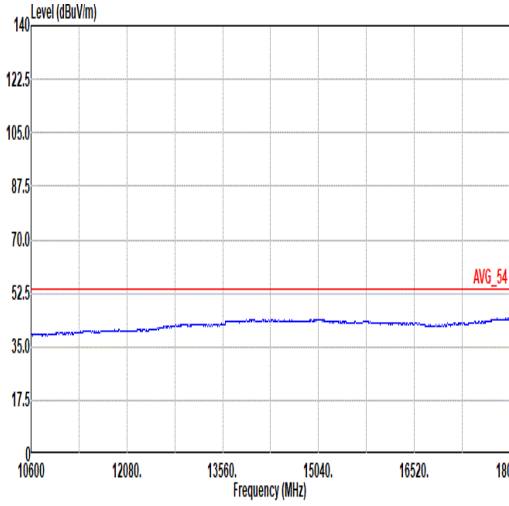


Mode	5	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 5 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 5 Setting : Plane :

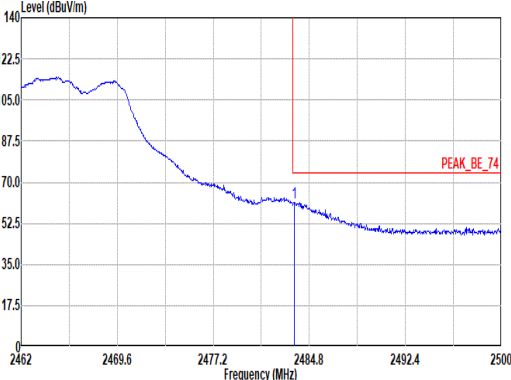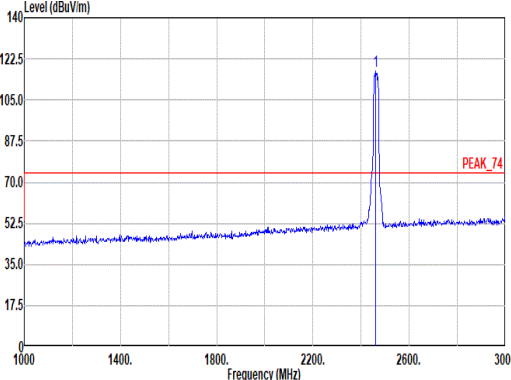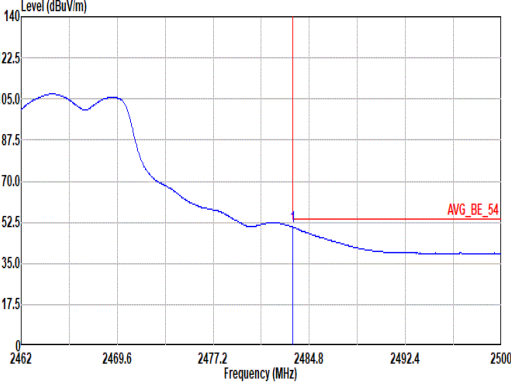
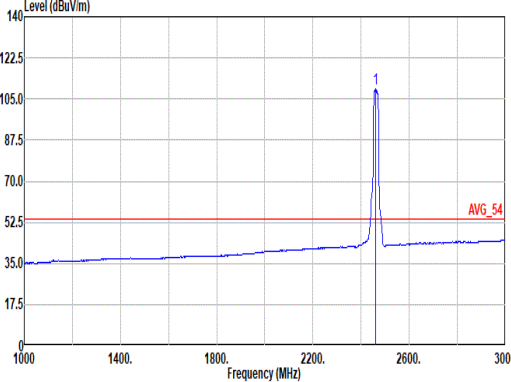


		6																																																																																														
Mode	Band Edge																																																																																															
	2400-2483.5_802.11g_CH11_2462MHz																																																																																															
ANT	1+2																																																																																															
Pol.	Horizontal						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 6 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>61.50</td><td>74.00</td><td>-12.50</td><td>48.89</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>176</td><td>19 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	61.50	74.00	-12.50	48.89	26.64	8.94	33.00	10.03	176	19 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 6 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>117.04</td><td>-----</td><td>-----</td><td>104.60</td><td>26.50</td><td>8.89</td><td>32.98</td><td>10.03</td><td>176</td><td>19 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	117.04	-----	-----	104.60	26.50	8.89	32.98	10.03	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.50	61.50	74.00	-12.50	48.89	26.64	8.94	33.00	10.03	176	19 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	117.04	-----	-----	104.60	26.50	8.89	32.98	10.03	176	19 PEAK																																																																																					
Avg																																																																																																
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 6 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>50.48</td><td>54.00</td><td>-3.52</td><td>37.87</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>176</td><td>19 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	50.48	54.00	-3.52	37.87	26.64	8.94	33.00	10.03	176	19 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 6 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>109.23</td><td>-----</td><td>-----</td><td>96.79</td><td>26.50</td><td>8.89</td><td>32.98</td><td>10.03</td><td>176</td><td>19 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	109.23	-----	-----	96.79	26.50	8.89	32.98	10.03	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.51	50.48	54.00	-3.52	37.87	26.64	8.94	33.00	10.03	176	19 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	109.23	-----	-----	96.79	26.50	8.89	32.98	10.03	176	19 AVERAGE																																																																																					

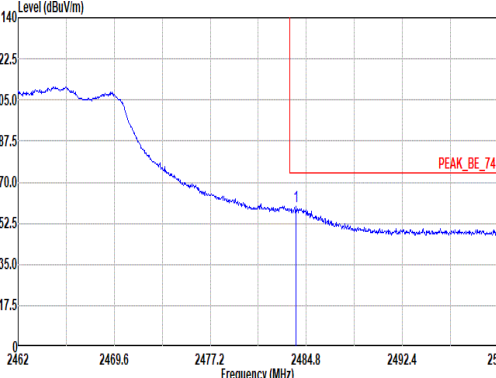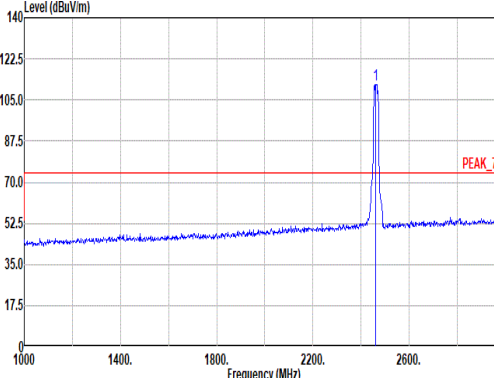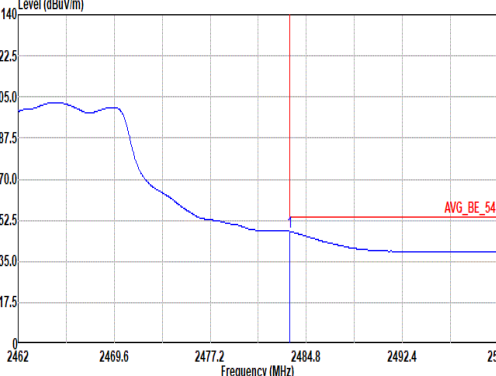
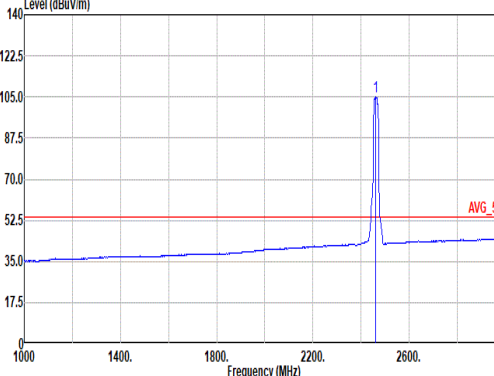


Mode	6																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.00</td><td>59.79</td><td>74.00</td><td>-14.21</td><td>47.18</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>232 0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.00	59.79	74.00	-14.21	47.18	26.64	8.94	33.00	10.03	232 0 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>111.71</td><td>-----</td><td>-----</td><td>99.26</td><td>26.50</td><td>8.90</td><td>32.98</td><td>10.03</td><td>232 0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	111.71	-----	-----	99.26	26.50	8.90	32.98	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2484.00	59.79	74.00	-14.21	47.18	26.64	8.94	33.00	10.03	232 0 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	111.71	-----	-----	99.26	26.50	8.90	32.98	10.03	232 0 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>47.78</td><td>54.00</td><td>-6.22</td><td>35.17</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>232 0 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	47.78	54.00	-6.22	35.17	26.64	8.94	33.00	10.03	232 0 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>105.02</td><td>-----</td><td>-----</td><td>92.58</td><td>26.50</td><td>8.89</td><td>32.98</td><td>10.03</td><td>232 0 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.02	-----	-----	92.58	26.50	8.89	32.98	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.51	47.78	54.00	-6.22	35.17	26.64	8.94	33.00	10.03	232 0 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	105.02	-----	-----	92.58	26.50	8.89	32.98	10.03	232 0 AVERAGE																																																																																								



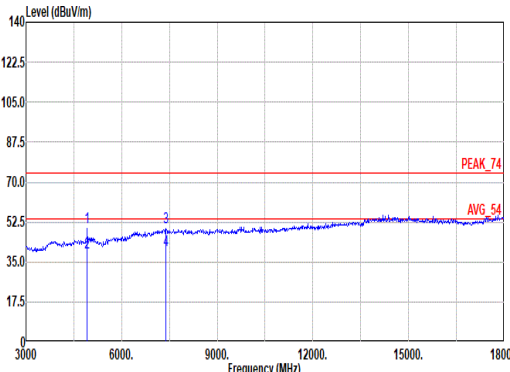
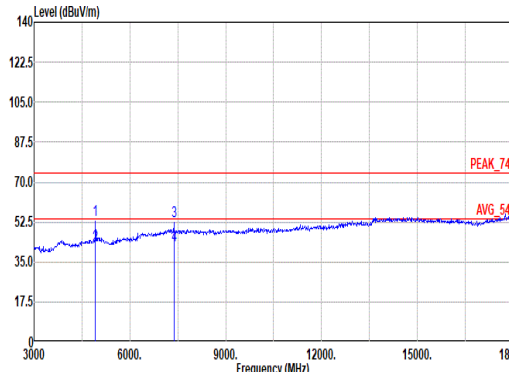


Mode	6																																																																																																																																																																																
	Harmonic																																																																																																																																																																																
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																																
ANT	1+2																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																										
Peak Avg																																																																																																																																																																																	
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 6 Setting : Plane : <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>50.23</td><td>74.00</td><td>-23.77</td><td>38.69</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>350</td><td>104</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>39.17</td><td>54.00</td><td>-14.83</td><td>27.63</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>350</td><td>104</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>50.19</td><td>74.00</td><td>-23.81</td><td>33.40</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>206</td><td>194</td><td>PEAK</td></tr><tr><td>4</td><td>7386.00</td><td>40.37</td><td>54.00</td><td>-13.63</td><td>23.58</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>206</td><td>194</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	50.23	74.00	-23.77	38.69	32.54	12.78	34.19	0.41	350	104	PEAK	2	4924.00	39.17	54.00	-14.83	27.63	32.54	12.78	34.19	0.41	350	104	AVERAGE	3	7386.00	50.19	74.00	-23.81	33.40	36.80	16.04	36.77	0.72	206	194	PEAK	4	7386.00	40.37	54.00	-13.63	23.58	36.80	16.04	36.77	0.72	206	194	AVERAGE	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 6 Setting : Plane : <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>53.60</td><td>74.00</td><td>-20.40</td><td>42.06</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>349</td><td>192</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>42.27</td><td>54.00</td><td>-11.73</td><td>30.73</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>349</td><td>192</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>52.72</td><td>74.00</td><td>-21.28</td><td>35.93</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>269</td><td>173</td><td>PEAK</td></tr><tr><td>4</td><td>7386.00</td><td>42.07</td><td>54.00</td><td>-11.93</td><td>25.28</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>269</td><td>173</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	53.60	74.00	-20.40	42.06	32.54	12.78	34.19	0.41	349	192	PEAK	2	4924.00	42.27	54.00	-11.73	30.73	32.54	12.78	34.19	0.41	349	192	AVERAGE	3	7386.00	52.72	74.00	-21.28	35.93	36.80	16.04	36.77	0.72	269	173	PEAK	4	7386.00	42.07	54.00	-11.93	25.28	36.80	16.04	36.77	0.72	269	173
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																							
1	4924.00	50.23	74.00	-23.77	38.69	32.54	12.78	34.19	0.41	350	104	PEAK																																																																																																																																																																					
2	4924.00	39.17	54.00	-14.83	27.63	32.54	12.78	34.19	0.41	350	104	AVERAGE																																																																																																																																																																					
3	7386.00	50.19	74.00	-23.81	33.40	36.80	16.04	36.77	0.72	206	194	PEAK																																																																																																																																																																					
4	7386.00	40.37	54.00	-13.63	23.58	36.80	16.04	36.77	0.72	206	194	AVERAGE																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																							
1	4924.00	53.60	74.00	-20.40	42.06	32.54	12.78	34.19	0.41	349	192	PEAK																																																																																																																																																																					
2	4924.00	42.27	54.00	-11.73	30.73	32.54	12.78	34.19	0.41	349	192	AVERAGE																																																																																																																																																																					
3	7386.00	52.72	74.00	-21.28	35.93	36.80	16.04	36.77	0.72	269	173	PEAK																																																																																																																																																																					
4	7386.00	42.07	54.00	-11.93	25.28	36.80	16.04	36.77	0.72	269	173	AVERAGE																																																																																																																																																																					



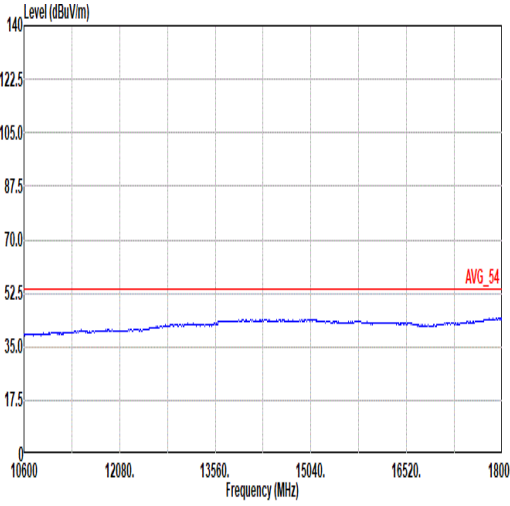
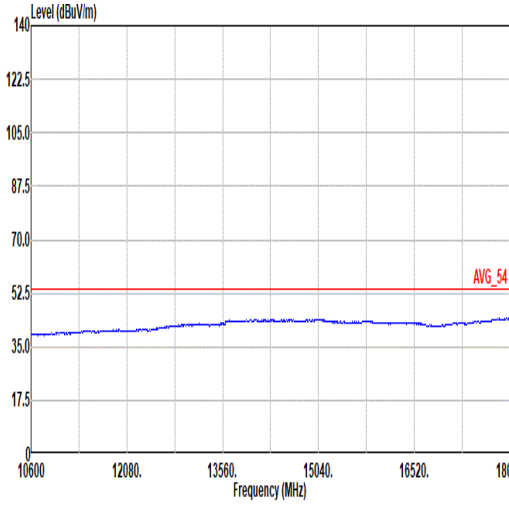


Mode	6	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 6 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 6 Setting : Plane :

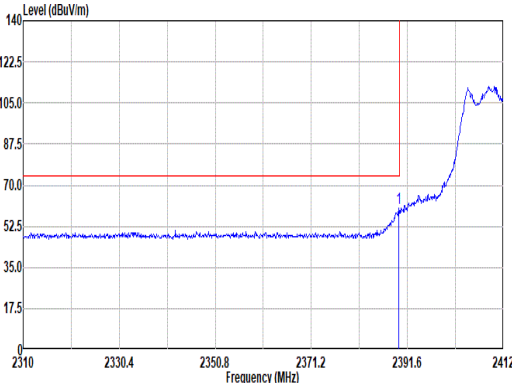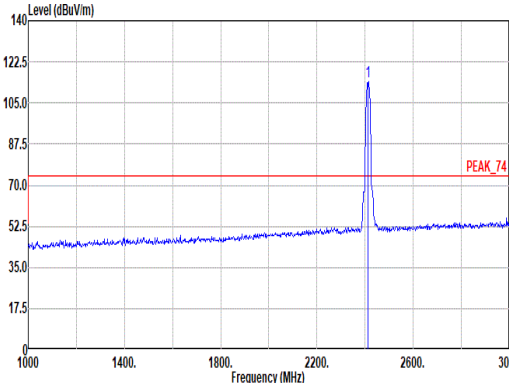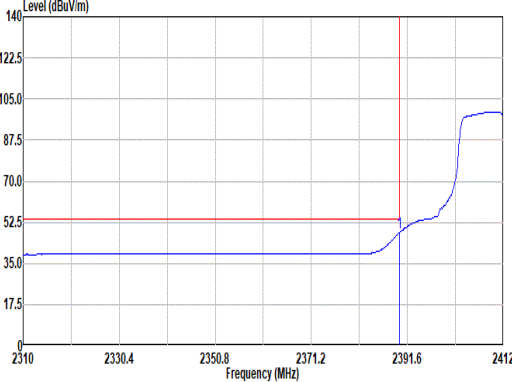
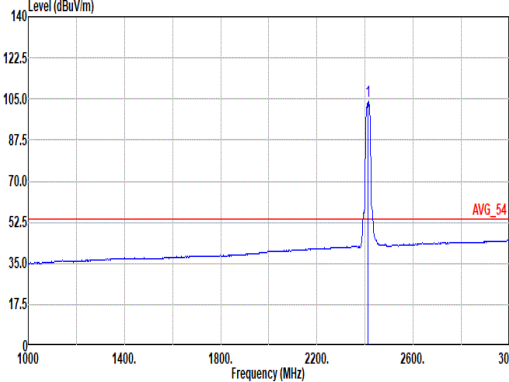


		7																																																																																																																						
Mode	Band Edge																																																																																																																							
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																							
ANT	1+2																																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																																	
Peak																																																																																																																								
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2389.76</td><td>60.21</td><td>74.00</td><td>-13.79</td><td>47.66</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>164</td></tr><tr><td colspan="11">23 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2389.76	60.21	74.00	-13.79	47.66	26.70	8.75	32.93	10.03	164	23 PEAK											Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2412.00</td><td>114.13</td><td>-----</td><td>-----</td><td>101.43</td><td>26.82</td><td>8.80</td><td>32.95</td><td>10.03</td><td>164</td></tr><tr><td colspan="11">23 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2412.00	114.13	-----	-----	101.43	26.82	8.80	32.95	10.03	164	23 PEAK									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																														
1	2389.76	60.21	74.00	-13.79	47.66	26.70	8.75	32.93	10.03	164																																																																																																														
23 PEAK																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																														
1	2412.00	114.13	-----	-----	101.43	26.82	8.80	32.95	10.03	164																																																																																																														
23 PEAK																																																																																																																								
Avg																																																																																																																								
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2389.97</td><td>48.23</td><td>54.00</td><td>-5.77</td><td>35.68</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>164</td></tr><tr><td colspan="11">23 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2389.97	48.23	54.00	-5.77	35.68	26.70	8.75	32.93	10.03	164	23 AVERAGE											Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2412.00</td><td>103.91</td><td>-----</td><td>-----</td><td>91.21</td><td>26.82</td><td>8.80</td><td>32.95</td><td>10.03</td><td>164</td></tr><tr><td colspan="11">23 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2412.00	103.91	-----	-----	91.21	26.82	8.80	32.95	10.03	164	23 AVERAGE									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																														
1	2389.97	48.23	54.00	-5.77	35.68	26.70	8.75	32.93	10.03	164																																																																																																														
23 AVERAGE																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																														
1	2412.00	103.91	-----	-----	91.21	26.82	8.80	32.95	10.03	164																																																																																																														
23 AVERAGE																																																																																																																								

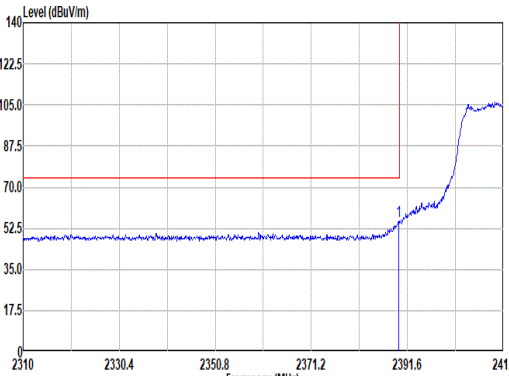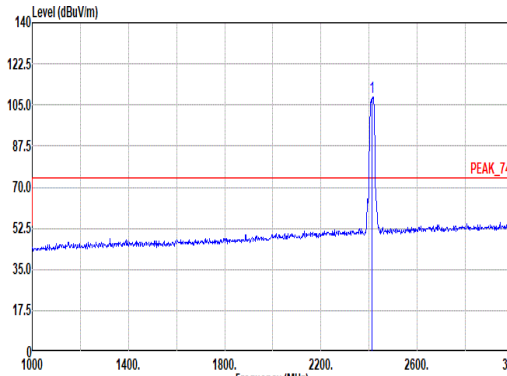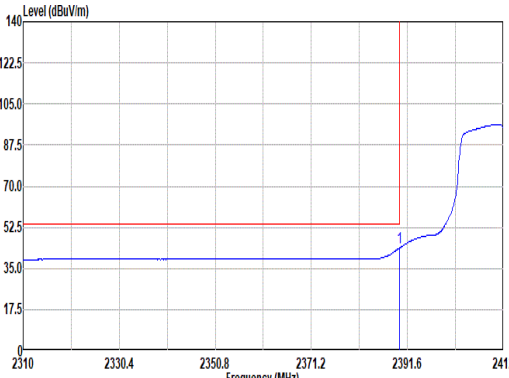
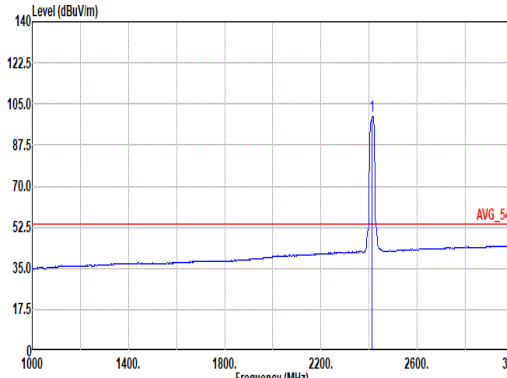


		7																																																																																																							
Mode	Band Edge																																																																																																								
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																								
ANT	1+2																																																																																																								
Pol.	Vertical						Fundamental																																																																																																		
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.76</td><td>55.40</td><td>74.00</td><td>-18.60</td><td>42.85</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>261</td><td>0 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.76	55.40	74.00	-18.60	42.85	26.70	8.75	32.93	10.03	261	0 PEAK	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>108.17</td><td>-----</td><td>-----</td><td>95.54</td><td>26.74</td><td>8.81</td><td>32.95</td><td>10.03</td><td>261</td><td>0 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	108.17	-----	-----	95.54	26.74	8.81	32.95	10.03	261	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2389.76	55.40	74.00	-18.60	42.85	26.70	8.75	32.93	10.03	261	0 PEAK																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2412.00	108.17	-----	-----	95.54	26.74	8.81	32.95	10.03	261	0 PEAK																																																																																														
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.97</td><td>43.74</td><td>54.00</td><td>-10.26</td><td>31.19</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>261</td><td>0 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.97	43.74	54.00	-10.26	31.19	26.70	8.75	32.93	10.03	261	0 AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>99.59</td><td>-----</td><td>-----</td><td>86.89</td><td>26.82</td><td>8.80</td><td>32.95</td><td>10.03</td><td>261</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	99.59	-----	-----	86.89	26.82	8.80	32.95	10.03	261	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2389.97	43.74	54.00	-10.26	31.19	26.70	8.75	32.93	10.03	261	0 AVERAGE																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2412.00	99.59	-----	-----	86.89	26.82	8.80	32.95	10.03	261	0 AVERAGE																																																																																														



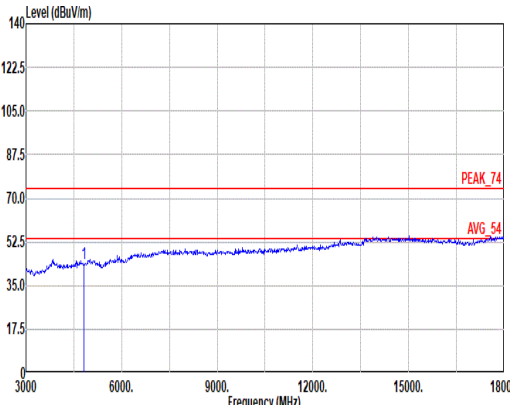
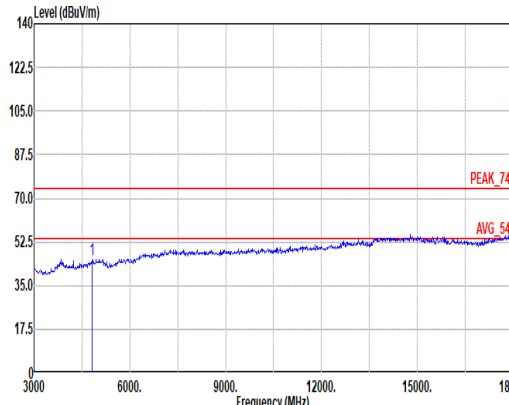


Mode	7																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																															
ANT	1+2																																																																																															
Pol.	Horizontal						Vertical																																																																																									
Peak Avg																																																																																																
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 7 Setting : Plane : <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>43.70</td><td>74.00</td><td>-30.30</td><td>32.52</td><td>32.25</td><td>12.68</td><td>34.18</td><td>0.43</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.70	74.00	-30.30	32.52	32.25	12.68	34.18	0.43	--	PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 7 Setting : Plane : <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>45.17</td><td>74.00</td><td>-28.83</td><td>33.99</td><td>32.25</td><td>12.68</td><td>34.18</td><td>0.43</td><td>--</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.17	74.00	-28.83	33.99	32.25	12.68	34.18	0.43	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4824.00	43.70	74.00	-30.30	32.52	32.25	12.68	34.18	0.43	--	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4824.00	45.17	74.00	-28.83	33.99	32.25	12.68	34.18	0.43	--	PEAK																																																																																					

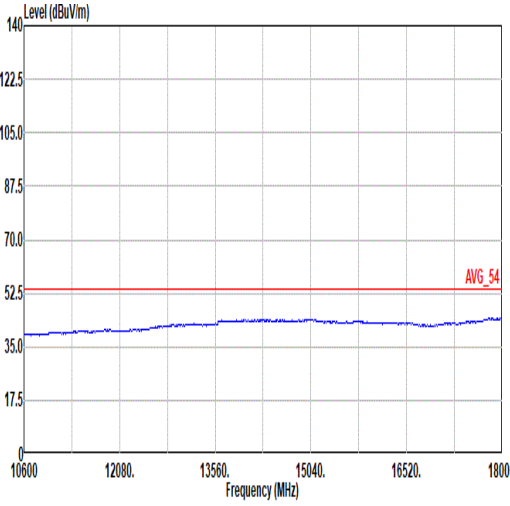
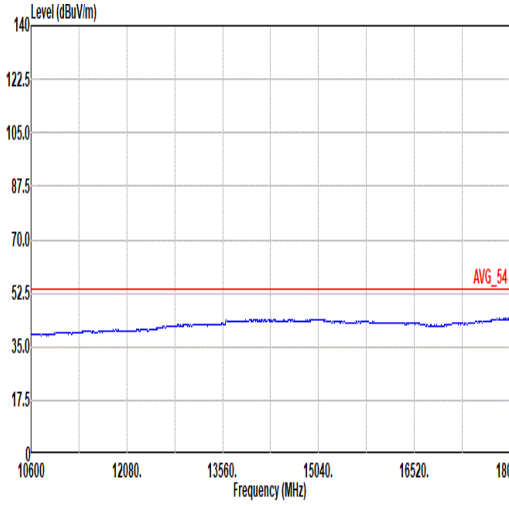


Mode	7	
	Harmonic	
	2400-2483.5_802.11n HT20_CH01_2412MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 7 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 7 Setting : Plane :

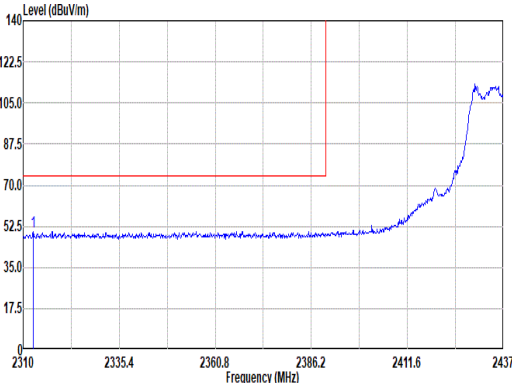
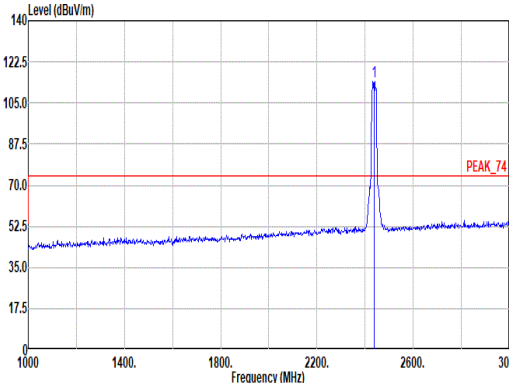
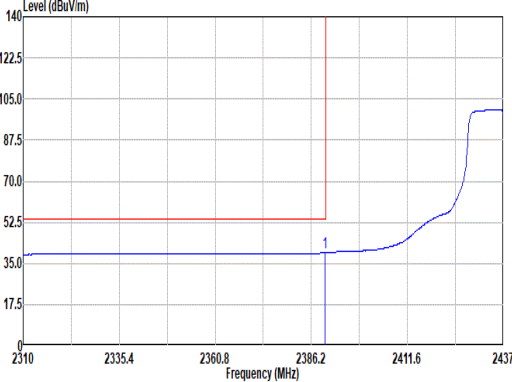
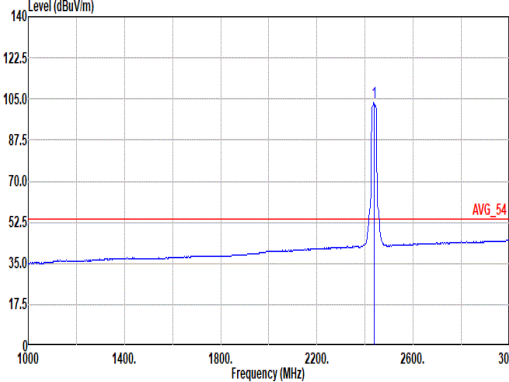


		8																																																																																																																						
Mode	Band Edge - L																																																																																																																							
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																																																							
ANT	1+2																																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																																	
Peak																																																																																																																								
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2312.67</td><td>50.29</td><td>74.00</td><td>-23.71</td><td>37.62</td><td>26.93</td><td>8.59</td><td>32.88</td><td>10.03</td><td>147</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>27 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2312.67	50.29	74.00	-23.71	37.62	26.93	8.59	32.88	10.03	147											27 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2437.00</td><td>114.16</td><td>-----</td><td>-----</td><td>101.66</td><td>26.60</td><td>8.83</td><td>32.96</td><td>10.03</td><td>147</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>27 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2437.00	114.16	-----	-----	101.66	26.60	8.83	32.96	10.03	147										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																
1	2312.67	50.29	74.00	-23.71	37.62	26.93	8.59	32.88	10.03	147																																																																																																														
										27 PEAK																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																
1	2437.00	114.16	-----	-----	101.66	26.60	8.83	32.96	10.03	147																																																																																																														
										27 PEAK																																																																																																														
Avg																																																																																																																								
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2389.76</td><td>39.52</td><td>54.00</td><td>-14.48</td><td>26.97</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>147</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>27 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2389.76	39.52	54.00	-14.48	26.97	26.70	8.75	32.93	10.03	147											27 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2437.00</td><td>103.29</td><td>-----</td><td>-----</td><td>90.73</td><td>26.66</td><td>8.84</td><td>32.97</td><td>10.03</td><td>147</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>27 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2437.00	103.29	-----	-----	90.73	26.66	8.84	32.97	10.03	147										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																
1	2389.76	39.52	54.00	-14.48	26.97	26.70	8.75	32.93	10.03	147																																																																																																														
										27 AVERAGE																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																
1	2437.00	103.29	-----	-----	90.73	26.66	8.84	32.97	10.03	147																																																																																																														
										27 AVERAGE																																																																																																														

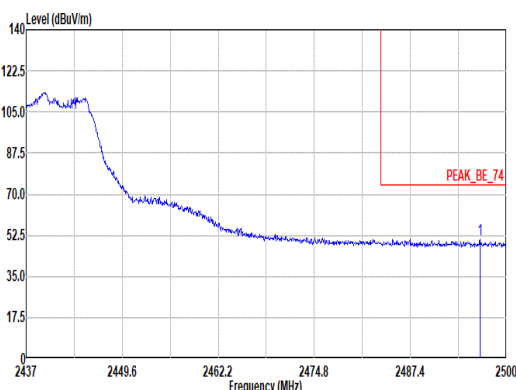
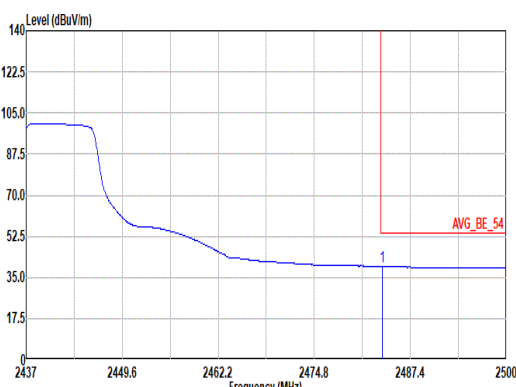


Mode	8																																												
	Band Edge - R																																												
	2400-2483.5_802.11n HT20_CH06_2437MHz																																												
ANT	1+2																																												
Pol.	Horizontal	Fundamental																																											
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.54</td><td>50.65</td><td>74.00</td><td>-23.35</td><td>37.96</td><td>26.70</td><td>8.97</td><td>33.01</td><td>10.03</td><td>147</td><td>27 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2496.54	50.65	74.00	-23.35	37.96	26.70	8.97	33.01	10.03	147	27 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2496.54	50.65	74.00	-23.35	37.96	26.70	8.97	33.01	10.03	147	27 PEAK																																		
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>39.79</td><td>54.00</td><td>-14.21</td><td>27.18</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>147</td><td>27 AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.68	39.79	54.00	-14.21	27.18	26.64	8.94	33.00	10.03	147	27 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2483.68	39.79	54.00	-14.21	27.18	26.64	8.94	33.00	10.03	147	27 AVERAGE																																		

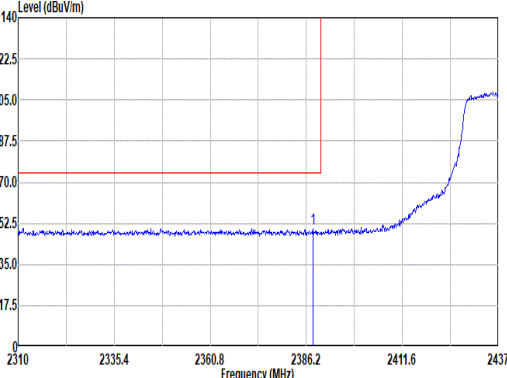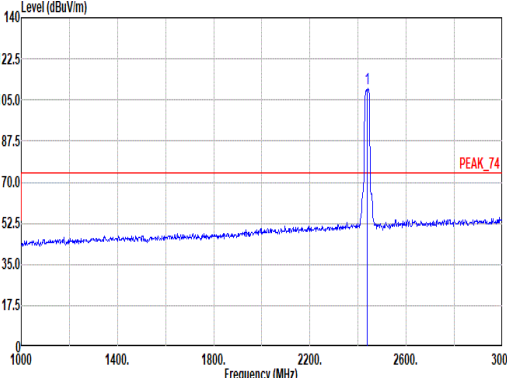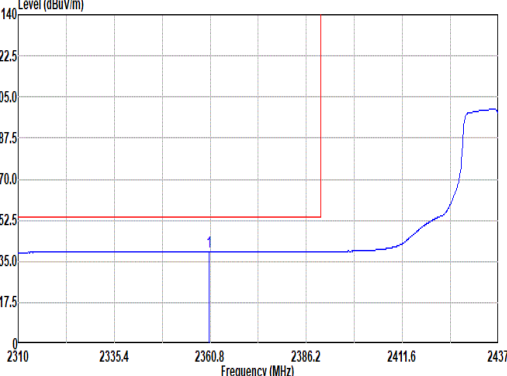
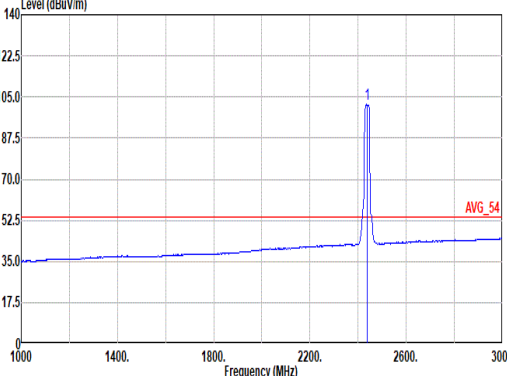


Mode	8																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.98</td><td>50.36</td><td>74.00</td><td>-23.64</td><td>37.81</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>255 0 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.98	50.36	74.00	-23.64	37.81	26.70	8.75	32.93	10.03	255 0 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>109.69</td><td>-----</td><td>-----</td><td>97.08</td><td>26.70</td><td>8.85</td><td>32.97</td><td>10.03</td><td>255 0 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	109.69	-----	-----	97.08	26.70	8.85	32.97	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2387.98	50.36	74.00	-23.64	37.81	26.70	8.75	32.93	10.03	255 0 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	109.69	-----	-----	97.08	26.70	8.85	32.97	10.03	255 0 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.42</td><td>39.16</td><td>54.00</td><td>-14.84</td><td>26.35</td><td>27.00</td><td>8.69</td><td>32.91</td><td>10.03</td><td>255 0 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.42	39.16	54.00	-14.84	26.35	27.00	8.69	32.91	10.03	255 0 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>101.70</td><td>-----</td><td>-----</td><td>89.14</td><td>26.66</td><td>8.84</td><td>32.97</td><td>10.03</td><td>255 0 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	101.70	-----	-----	89.14	26.66	8.84	32.97	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2386.42	39.16	54.00	-14.84	26.35	27.00	8.69	32.91	10.03	255 0 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	101.70	-----	-----	89.14	26.66	8.84	32.97	10.03	255 0 AVERAGE																																																																																								

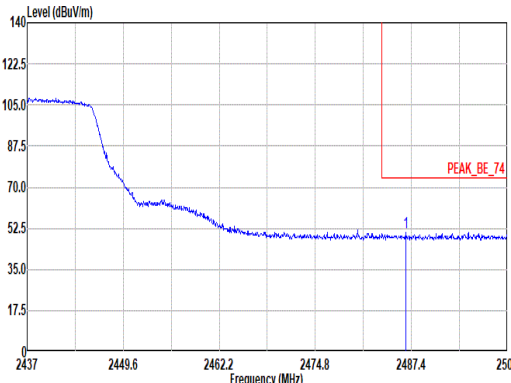
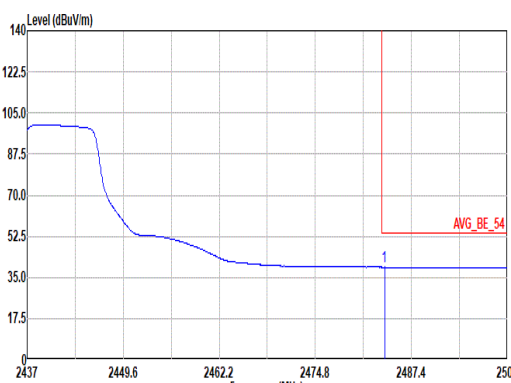


Mode	8																																											
	Band Edge - R																																											
	2400-2483.5_802.11n HT20_CH06_2437MHz																																											
ANT	1+2																																											
Pol.	Vertical	Fundamental																																										
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2486.64</td><td>50.51</td><td>74.00</td><td>-23.49</td><td></td><td>37.86</td><td>26.67</td><td>8.95</td><td>33.00</td><td>10.03</td><td>255</td><td>0</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2486.64	50.51	74.00	-23.49		37.86	26.67	8.95	33.00	10.03	255	0	PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	2486.64	50.51	74.00	-23.49		37.86	26.67	8.95	33.00	10.03	255	0	PEAK																															
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.87</td><td>39.37</td><td>54.00</td><td>-14.63</td><td></td><td>26.76</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>255</td><td>0</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.87	39.37	54.00	-14.63		26.76	26.64	8.94	33.00	10.03	255	0	AVERAGE	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	2483.87	39.37	54.00	-14.63		26.76	26.64	8.94	33.00	10.03	255	0	AVERAGE																															



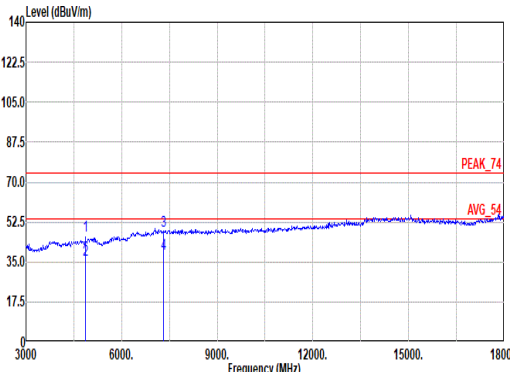
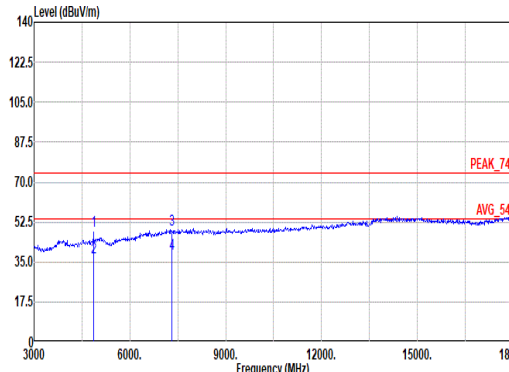


Mode	8																																																																																																																																																																																
	Harmonic																																																																																																																																																																																
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																																																																
ANT	1+2																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																										
Peak Avg																																																																																																																																																																																	
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 8 Setting : Plane : <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>46.39</td><td>74.00</td><td>-27.61</td><td>35.07</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>281</td><td>81</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>35.90</td><td>54.00</td><td>-18.10</td><td>24.58</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>281</td><td>81</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>48.57</td><td>74.00</td><td>-25.43</td><td>31.98</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7311.00</td><td>38.52</td><td>54.00</td><td>-15.48</td><td>21.93</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table> Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 8 Setting : Plane : <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>48.44</td><td>74.00</td><td>-25.56</td><td>37.12</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>299</td><td>162</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>37.00</td><td>54.00</td><td>-17.00</td><td>25.68</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>299</td><td>162</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>49.09</td><td>74.00</td><td>-24.91</td><td>32.50</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7311.00</td><td>38.57</td><td>54.00</td><td>-15.43</td><td>21.98</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	46.39	74.00	-27.61	35.07	32.35	12.73	34.18	0.42	281	81	PEAK	2	4874.00	35.90	54.00	-18.10	24.58	32.35	12.73	34.18	0.42	281	81	AVERAGE	3	7311.00	48.57	74.00	-25.43	31.98	36.72	15.95	36.71	0.63	--	--	PEAK	4	7311.00	38.52	54.00	-15.48	21.93	36.72	15.95	36.71	0.63	--	--	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	48.44	74.00	-25.56	37.12	32.35	12.73	34.18	0.42	299	162	PEAK	2	4874.00	37.00	54.00	-17.00	25.68	32.35	12.73	34.18	0.42	299	162	AVERAGE	3	7311.00	49.09	74.00	-24.91	32.50	36.72	15.95	36.71	0.63	--	--	PEAK	4	7311.00	38.57	54.00	-15.43	21.98	36.72	15.95	36.71	0.63	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	4874.00	46.39	74.00	-27.61	35.07	32.35	12.73	34.18	0.42	281	81	PEAK																																																																																																																																																																					
2	4874.00	35.90	54.00	-18.10	24.58	32.35	12.73	34.18	0.42	281	81	AVERAGE																																																																																																																																																																					
3	7311.00	48.57	74.00	-25.43	31.98	36.72	15.95	36.71	0.63	--	--	PEAK																																																																																																																																																																					
4	7311.00	38.52	54.00	-15.48	21.93	36.72	15.95	36.71	0.63	--	--	AVERAGE																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	4874.00	48.44	74.00	-25.56	37.12	32.35	12.73	34.18	0.42	299	162	PEAK																																																																																																																																																																					
2	4874.00	37.00	54.00	-17.00	25.68	32.35	12.73	34.18	0.42	299	162	AVERAGE																																																																																																																																																																					
3	7311.00	49.09	74.00	-24.91	32.50	36.72	15.95	36.71	0.63	--	--	PEAK																																																																																																																																																																					
4	7311.00	38.57	54.00	-15.43	21.98	36.72	15.95	36.71	0.63	--	--	AVERAGE																																																																																																																																																																					



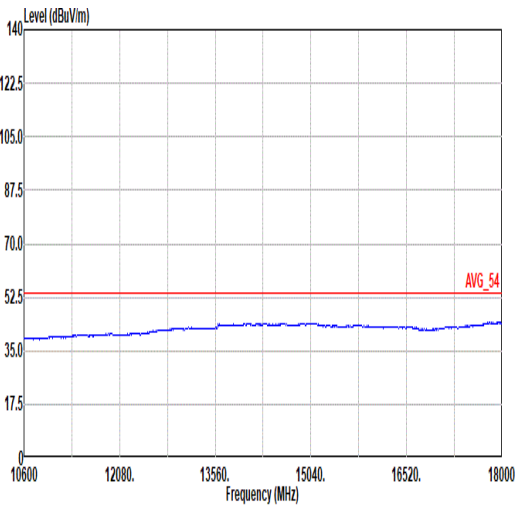
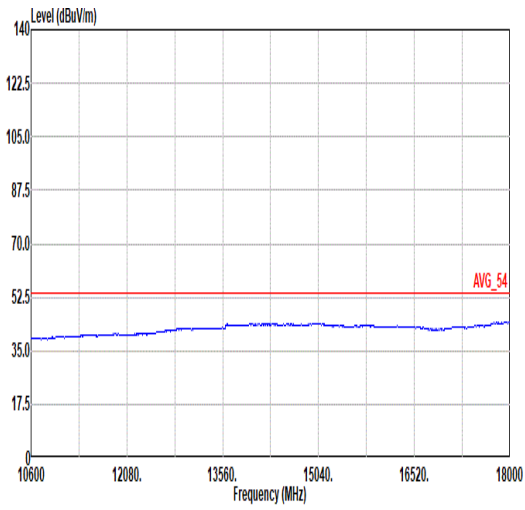


Mode	8	
	Harmonic	
	2400-2483.5_802.11n HT20_CH06_2437MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 8 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 8 Setting : Plane :

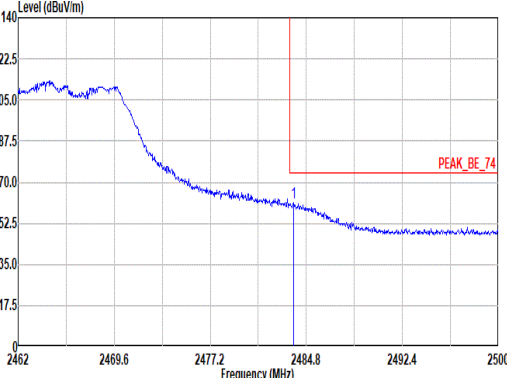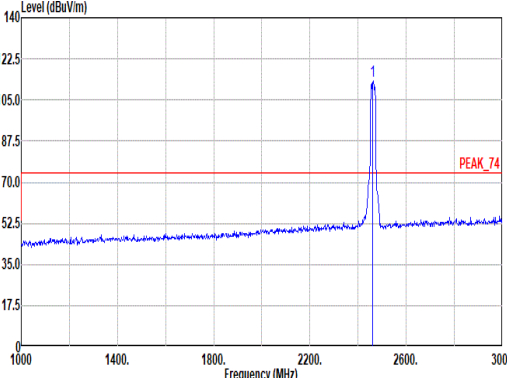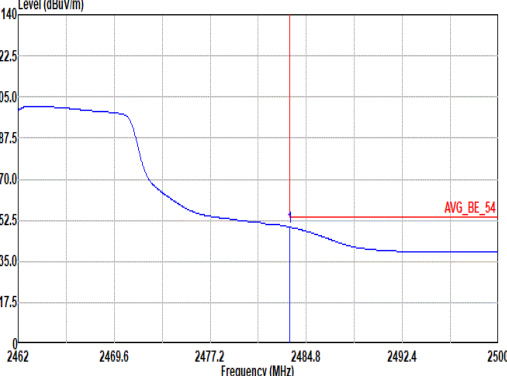
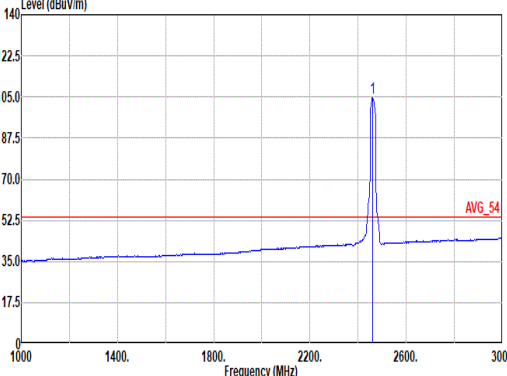


		9																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																		
ANT	1+2																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.81</td><td>61.49</td><td>74.00</td><td>-12.51</td><td>48.88</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>160</td><td>21</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.81	61.49	74.00	-12.51	48.88	26.64	8.94	33.00	10.03	160	21	PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>112.87</td><td>-----</td><td>-----</td><td>100.42</td><td>26.50</td><td>8.90</td><td>32.98</td><td>10.03</td><td>160</td><td>21</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	112.87	-----	-----	100.42	26.50	8.90	32.98	10.03	160	21
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.81	61.49	74.00	-12.51	48.88	26.64	8.94	33.00	10.03	160	21	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	112.87	-----	-----	100.42	26.50	8.90	32.98	10.03	160	21	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>49.57</td><td>54.00</td><td>-4.43</td><td>36.96</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>160</td><td>21</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	49.57	54.00	-4.43	36.96	26.64	8.94	33.00	10.03	160	21	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 17.5 Plane : Y with Adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.60</td><td>-----</td><td>-----</td><td>92.16</td><td>26.50</td><td>8.89</td><td>32.98</td><td>10.03</td><td>160</td><td>21</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.60	-----	-----	92.16	26.50	8.89	32.98	10.03	160	21
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.51	49.57	54.00	-4.43	36.96	26.64	8.94	33.00	10.03	160	21	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	104.60	-----	-----	92.16	26.50	8.89	32.98	10.03	160	21	AVERAGE																																																																																							

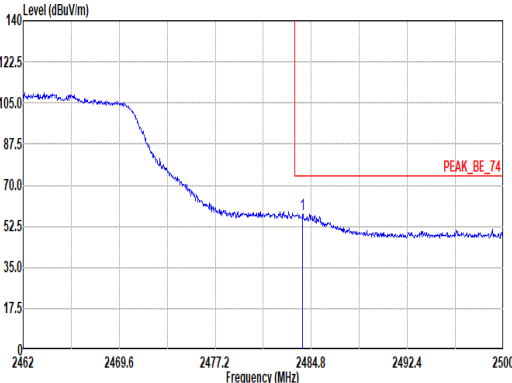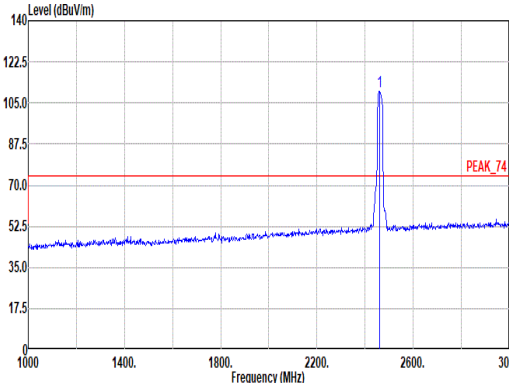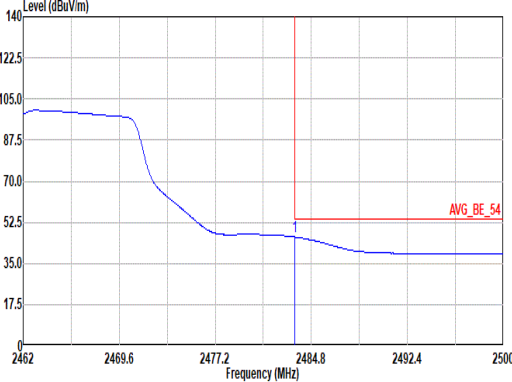
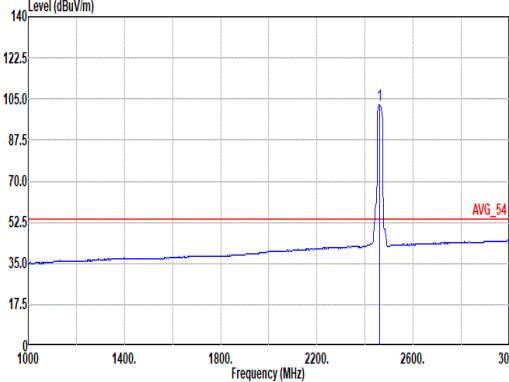


Mode	9																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.12</td><td>57.81</td><td>74.00</td><td>-16.19</td><td>45.20</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>242 0 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.12	57.81	74.00	-16.19	45.20	26.64	8.94	33.00	10.03	242 0 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>109.92</td><td>-----</td><td>-----</td><td>97.41</td><td>26.58</td><td>8.88</td><td>32.98</td><td>10.03</td><td>242 0 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	109.92	-----	-----	97.41	26.58	8.88	32.98	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2484.12	57.81	74.00	-16.19	45.20	26.64	8.94	33.00	10.03	242 0 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	109.92	-----	-----	97.41	26.58	8.88	32.98	10.03	242 0 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>46.25</td><td>54.00</td><td>-7.75</td><td>33.64</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>242 0 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	46.25	54.00	-7.75	33.64	26.64	8.94	33.00	10.03	242 0 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 17.5 Plane : Y with Adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>102.57</td><td>-----</td><td>-----</td><td>90.13</td><td>26.50</td><td>8.89</td><td>32.98</td><td>10.03</td><td>242 0 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.57	-----	-----	90.13	26.50	8.89	32.98	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.51	46.25	54.00	-7.75	33.64	26.64	8.94	33.00	10.03	242 0 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	102.57	-----	-----	90.13	26.50	8.89	32.98	10.03	242 0 AVERAGE																																																																																								



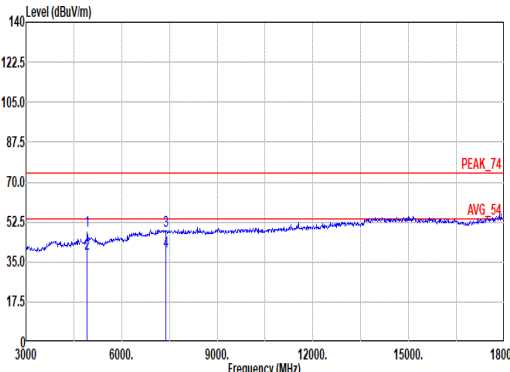
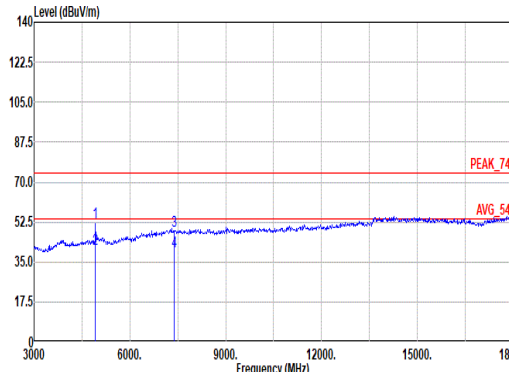


Mode	9																																																																																																																																																				
	Harmonic																																																																																																																																																				
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																																				
ANT	1+2																																																																																																																																																				
Pol.	Horizontal					Vertical																																																																																																																																															
Peak Avg																																																																																																																																																					
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 9 Setting : Plane : <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 4924.00</td><td>48.86</td><td>74.00</td><td>-25.14</td><td>37.32</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>103 238 PEAK</td></tr><tr><td>2 4924.00</td><td>38.52</td><td>54.00</td><td>-15.48</td><td>26.98</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>103 238 AVERAGE</td></tr><tr><td>3 7386.00</td><td>48.82</td><td>74.00</td><td>-25.18</td><td>32.03</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>-- -- PEAK</td></tr><tr><td>4 7386.00</td><td>39.57</td><td>54.00</td><td>-14.43</td><td>22.78</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>-- -- AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4924.00	48.86	74.00	-25.14	37.32	32.54	12.78	34.19	0.41	103 238 PEAK	2 4924.00	38.52	54.00	-15.48	26.98	32.54	12.78	34.19	0.41	103 238 AVERAGE	3 7386.00	48.82	74.00	-25.18	32.03	36.80	16.04	36.77	0.72	-- -- PEAK	4 7386.00	39.57	54.00	-14.43	22.78	36.80	16.04	36.77	0.72	-- -- AVERAGE	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 9 Setting : Plane : <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 4924.00</td><td>52.21</td><td>74.00</td><td>-21.79</td><td>40.67</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>349 178 PEAK</td></tr><tr><td>2 4924.00</td><td>40.78</td><td>54.00</td><td>-13.22</td><td>29.24</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>349 178 AVERAGE</td></tr><tr><td>3 7386.00</td><td>48.66</td><td>74.00</td><td>-25.34</td><td>31.87</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>-- -- PEAK</td></tr><tr><td>4 7386.00</td><td>39.49</td><td>54.00</td><td>-14.51</td><td>22.70</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>-- -- AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4924.00	52.21	74.00	-21.79	40.67	32.54	12.78	34.19	0.41	349 178 PEAK	2 4924.00	40.78	54.00	-13.22	29.24	32.54	12.78	34.19	0.41	349 178 AVERAGE	3 7386.00	48.66	74.00	-25.34	31.87	36.80	16.04	36.77	0.72	-- -- PEAK	4 7386.00	39.49	54.00	-14.51	22.70	36.80	16.04	36.77	0.72
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																												
1 4924.00	48.86	74.00	-25.14	37.32	32.54	12.78	34.19	0.41	103 238 PEAK																																																																																																																																												
2 4924.00	38.52	54.00	-15.48	26.98	32.54	12.78	34.19	0.41	103 238 AVERAGE																																																																																																																																												
3 7386.00	48.82	74.00	-25.18	32.03	36.80	16.04	36.77	0.72	-- -- PEAK																																																																																																																																												
4 7386.00	39.57	54.00	-14.43	22.78	36.80	16.04	36.77	0.72	-- -- AVERAGE																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																												
1 4924.00	52.21	74.00	-21.79	40.67	32.54	12.78	34.19	0.41	349 178 PEAK																																																																																																																																												
2 4924.00	40.78	54.00	-13.22	29.24	32.54	12.78	34.19	0.41	349 178 AVERAGE																																																																																																																																												
3 7386.00	48.66	74.00	-25.34	31.87	36.80	16.04	36.77	0.72	-- -- PEAK																																																																																																																																												
4 7386.00	39.49	54.00	-14.51	22.70	36.80	16.04	36.77	0.72	-- -- AVERAGE																																																																																																																																												

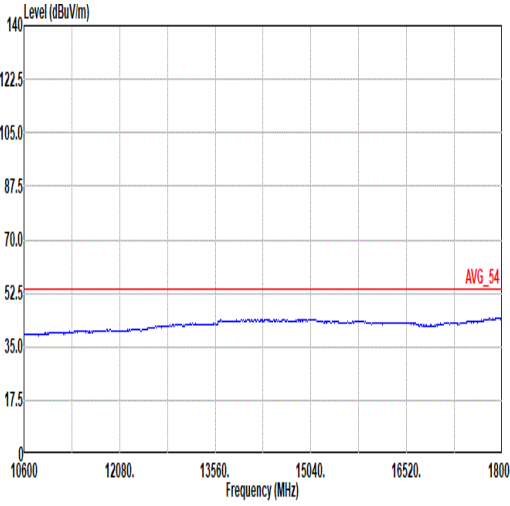
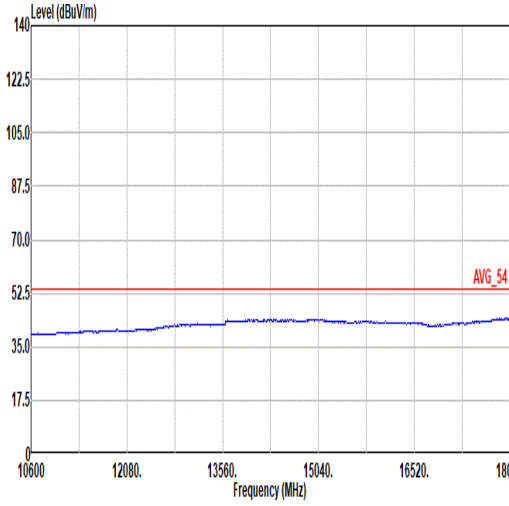


Mode	9	
	Harmonic	
	2400-2483.5_802.11n HT20_CH11_2462MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 9 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 9 Setting : Plane :

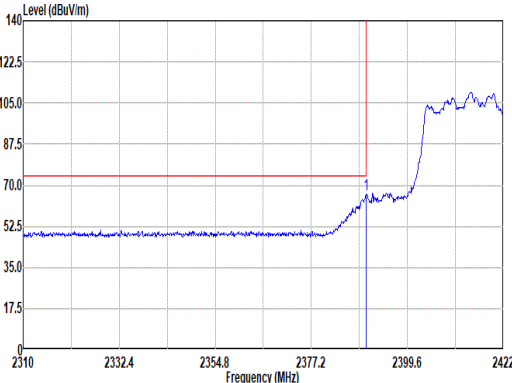
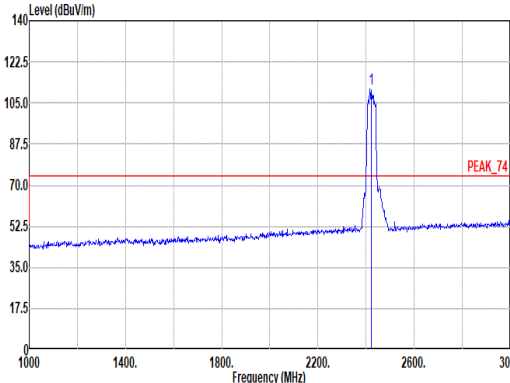
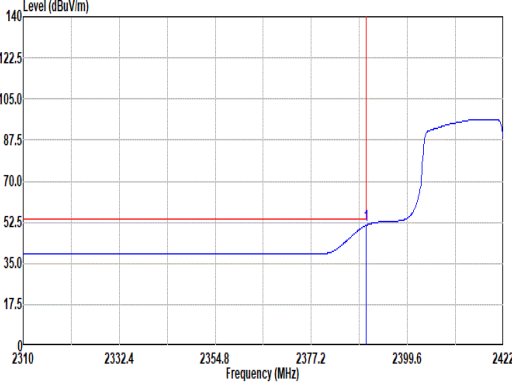
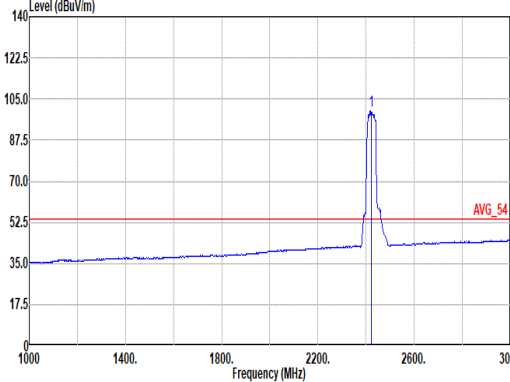


Mode	10																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																								
ANT	1+2																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.97</td><td>66.02</td><td>74.00</td><td>-7.98</td><td>53.47</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>200</td><td>41</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.97	66.02	74.00	-7.98	53.47	26.70	8.75	32.93	10.03	200	41	PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>110.93</td><td>-----</td><td>-----</td><td>98.23</td><td>26.82</td><td>8.80</td><td>32.95</td><td>10.03</td><td>200</td><td>41</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	110.93	-----	-----	98.23	26.82	8.80	32.95	10.03	200	41
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.97	66.02	74.00	-7.98	53.47	26.70	8.75	32.93	10.03	200	41	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	110.93	-----	-----	98.23	26.82	8.80	32.95	10.03	200	41	PEAK																																																																													
Avg																																																																																									
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.97</td><td>51.21</td><td>54.00</td><td>-2.79</td><td>38.66</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>200</td><td>41</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.97	51.21	54.00	-2.79	38.66	26.70	8.75	32.93	10.03	200	41	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>99.77</td><td>-----</td><td>-----</td><td>87.07</td><td>26.82</td><td>8.80</td><td>32.95</td><td>10.03</td><td>200</td><td>41</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	99.77	-----	-----	87.07	26.82	8.80	32.95	10.03	200	41
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.97	51.21	54.00	-2.79	38.66	26.70	8.75	32.93	10.03	200	41	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2422.00	99.77	-----	-----	87.07	26.82	8.80	32.95	10.03	200	41	AVERAGE																																																																													

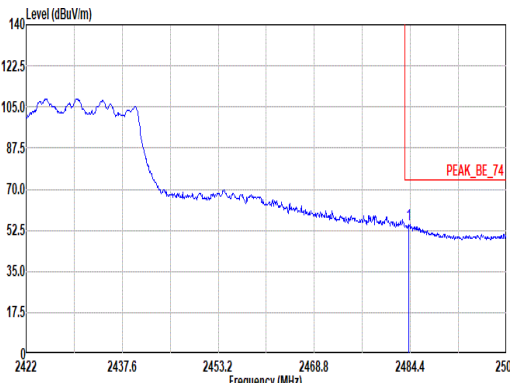
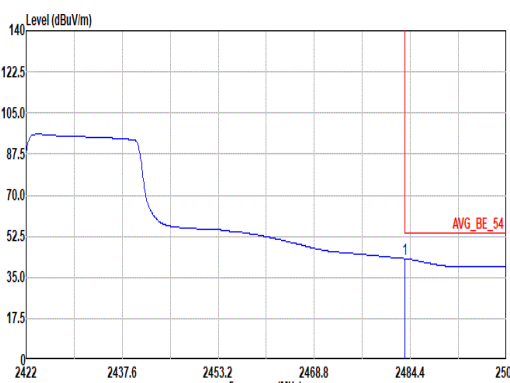


Mode	10																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																						
ANT	1+2																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.09</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>42.52</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>200</td><td>41</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.09	55.13	74.00	-18.87	42.52	26.64	8.94	33.00	10.03	200	41	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2484.09	55.13	74.00	-18.87	42.52	26.64	8.94	33.00	10.03	200	41	PEAK																																											
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>30.34</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>200</td><td>41</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.54	42.95	54.00	-11.05	30.34	26.64	8.94	33.00	10.03	200	41	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2483.54	42.95	54.00	-11.05	30.34	26.64	8.94	33.00	10.03	200	41	AVERAGE																																											

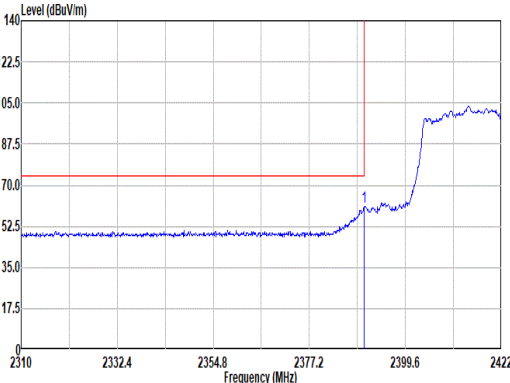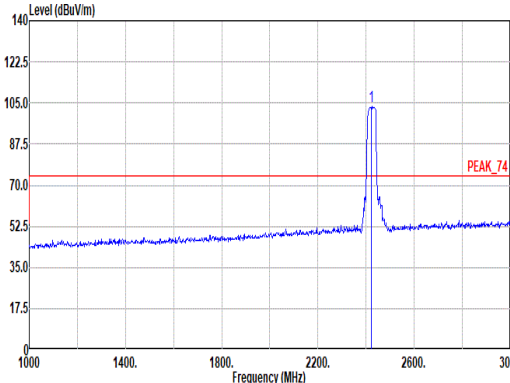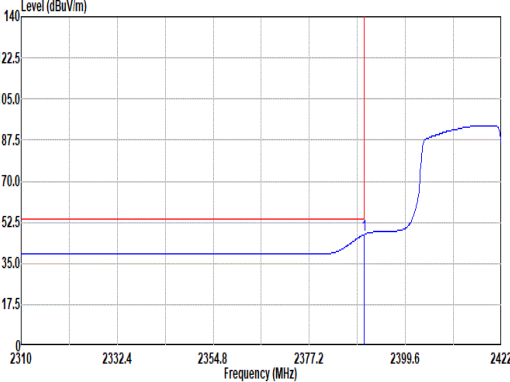
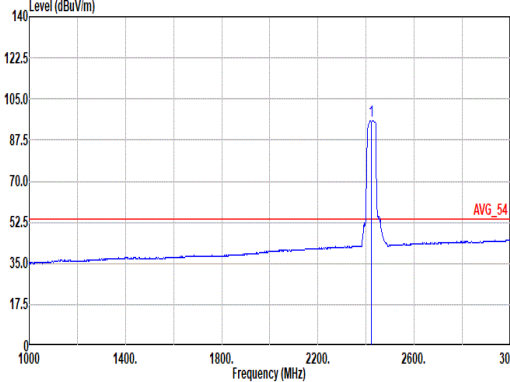


Mode	10																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.97</td><td>60.64</td><td>74.00</td><td>-13.36</td><td>48.09</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>238</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2389.97	60.64	74.00	-13.36	48.09	26.70	8.75	32.93	10.03	238	0	PEAK	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>103.58</td><td>-----</td><td>-----</td><td>91.05</td><td>26.64</td><td>8.82</td><td>32.96</td><td>10.03</td><td>238</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2422.00	103.58	-----	-----	91.05	26.64	8.82	32.96	10.03	238	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																									
1	2389.97	60.64	74.00	-13.36	48.09	26.70	8.75	32.93	10.03	238	0	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																									
1	2422.00	103.58	-----	-----	91.05	26.64	8.82	32.96	10.03	238	0	PEAK																																																																																						
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.97</td><td>47.25</td><td>54.00</td><td>-6.75</td><td>34.70</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>238</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2389.97	47.25	54.00	-6.75	34.70	26.70	8.75	32.93	10.03	238	0	AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>95.79</td><td>-----</td><td>-----</td><td>83.20</td><td>26.70</td><td>8.81</td><td>32.95</td><td>10.03</td><td>238</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2422.00	95.79	-----	-----	83.20	26.70	8.81	32.95	10.03	238	0	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																									
1	2389.97	47.25	54.00	-6.75	34.70	26.70	8.75	32.93	10.03	238	0	AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																									
1	2422.00	95.79	-----	-----	83.20	26.70	8.81	32.95	10.03	238	0	AVERAGE																																																																																						

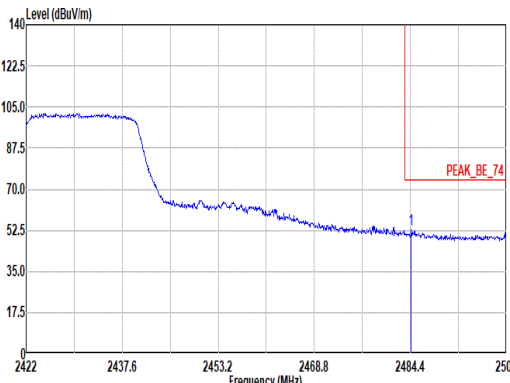
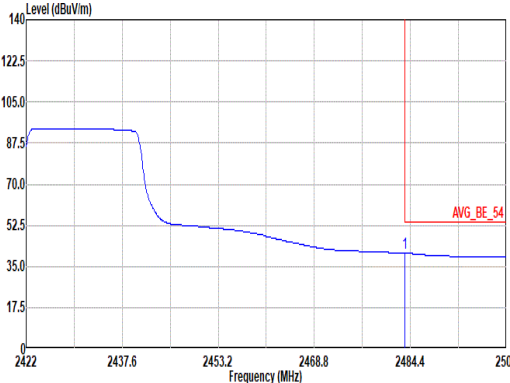


Mode	10																																												
	Band Edge - R																																												
	2400-2483.5_802.11n HT40_CH03_2422MHz																																												
ANT	1+2																																												
Pol.	Vertical	Fundamental																																											
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2484.56</td><td>52.62</td><td>74.00</td><td>-21.38</td><td>40.00</td><td>26.65</td><td>8.94</td><td>33.00</td><td>10.03</td><td>238</td><td>0</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2484.56	52.62	74.00	-21.38	40.00	26.65	8.94	33.00	10.03	238	0	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 2484.56	52.62	74.00	-21.38	40.00	26.65	8.94	33.00	10.03	238	0	PEAK																																		
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.54</td><td>40.59</td><td>54.00</td><td>-13.41</td><td>27.98</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>238</td><td>0</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.54	40.59	54.00	-13.41	27.98	26.64	8.94	33.00	10.03	238	0	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 2483.54	40.59	54.00	-13.41	27.98	26.64	8.94	33.00	10.03	238	0	AVERAGE																																		



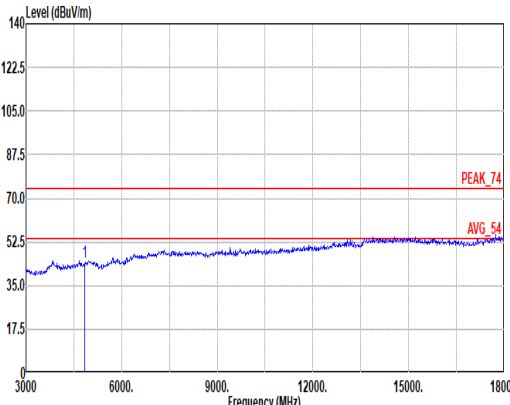
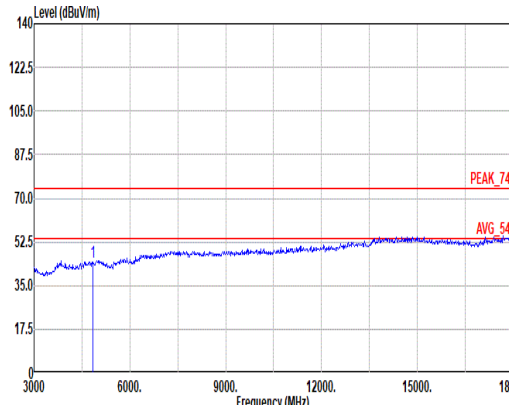


Mode	10																																																																																																		
	Harmonic																																																																																																		
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																		
ANT	1+2																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 10 Setting : Plane : <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>44.36</td><td>74.00</td><td>-29.64</td><td>33.13</td><td>32.29</td><td>12.70</td><td>34.18</td><td>0.42</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4844.00	44.36	74.00	-29.64	33.13	32.29	12.70	34.18	0.42	--	--	PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 10 Setting : Plane : <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>44.46</td><td>74.00</td><td>-29.54</td><td>33.23</td><td>32.29</td><td>12.70</td><td>34.18</td><td>0.42</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4844.00	44.46	74.00	-29.54	33.23	32.29	12.70	34.18	0.42	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4844.00	44.36	74.00	-29.64	33.13	32.29	12.70	34.18	0.42	--	--	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4844.00	44.46	74.00	-29.54	33.23	32.29	12.70	34.18	0.42	--	--	PEAK																																																																																							

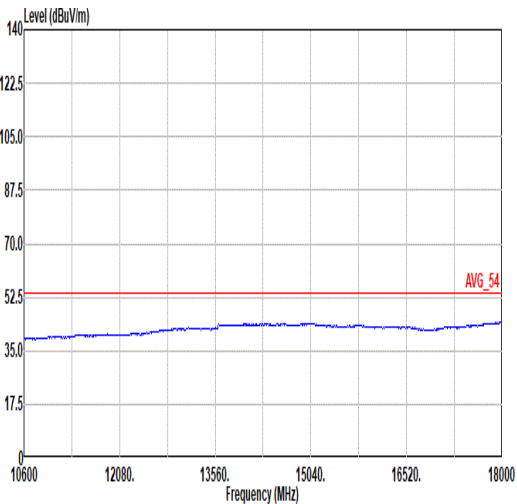
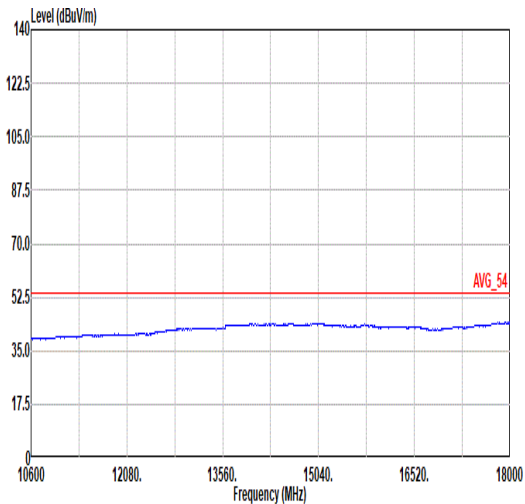


Mode	10	
	Harmonic	
	2400-2483.5_802.11n HT40_CH03_2422MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 10 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 10 Setting : Plane :

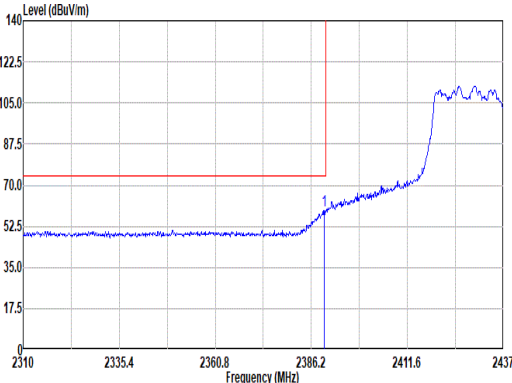
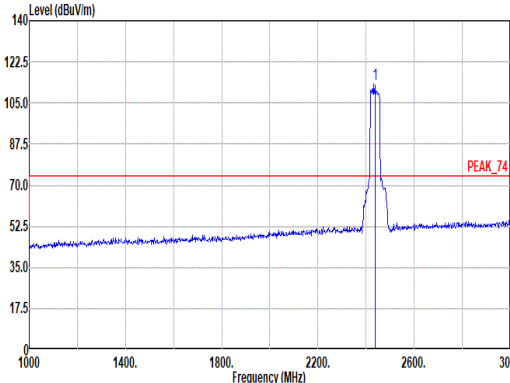
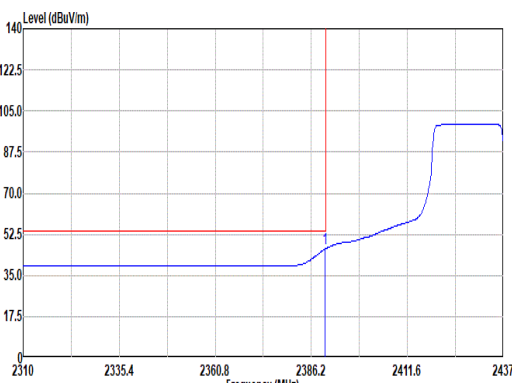
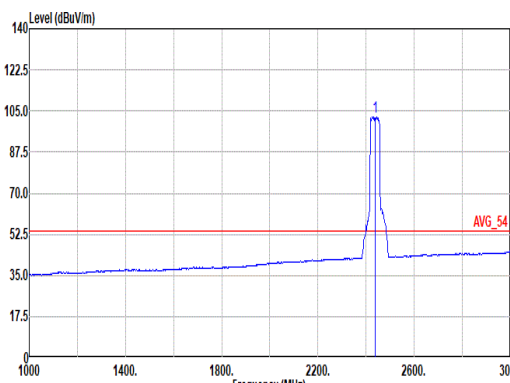


Mode	11																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																		
ANT	1+2																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.63</td><td>59.36</td><td>74.00</td><td>-14.64</td><td>46.81</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>133</td><td>30</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	59.36	74.00	-14.64	46.81	26.70	8.75	32.93	10.03	133	30	PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>113.30</td><td>-----</td><td>-----</td><td>100.00</td><td>26.60</td><td>8.83</td><td>32.96</td><td>10.03</td><td>133</td><td>30</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	113.30	-----	-----	100.00	26.60	8.83	32.96	10.03	133	30
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.63	59.36	74.00	-14.64	46.81	26.70	8.75	32.93	10.03	133	30	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	113.30	-----	-----	100.00	26.60	8.83	32.96	10.03	133	30	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.88</td><td>46.26</td><td>54.00</td><td>-7.74</td><td>33.71</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>133</td><td>30</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	46.26	54.00	-7.74	33.71	26.70	8.75	32.93	10.03	133	30	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>102.44</td><td>-----</td><td>-----</td><td>89.89</td><td>26.66</td><td>8.82</td><td>32.96</td><td>10.03</td><td>133</td><td>30</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	102.44	-----	-----	89.89	26.66	8.82	32.96	10.03	133	30
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.88	46.26	54.00	-7.74	33.71	26.70	8.75	32.93	10.03	133	30	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	102.44	-----	-----	89.89	26.66	8.82	32.96	10.03	133	30	AVERAGE																																																																																							

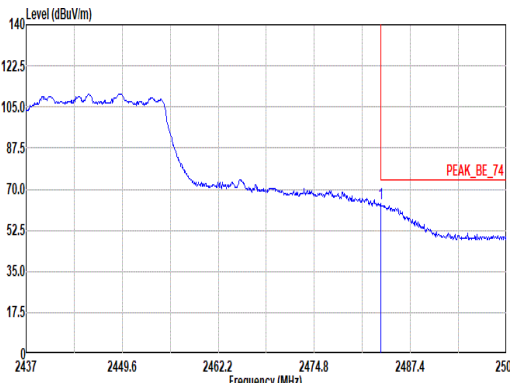
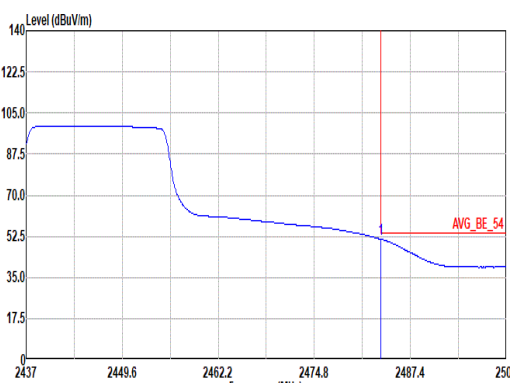


Mode	11																																					
	Band Edge - R																																					
	2400-2483.5_802.11n HT40_CH06_2437MHz																																					
ANT	1+2																																					
Pol.	Horizontal	Fundamental																																				
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.56</td><td>63.73</td><td>74.00</td><td>-10.27</td><td>51.12</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>133</td><td>30</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.56	63.73	74.00	-10.27	51.12	26.64	8.94	33.00	10.03	133	30	PEAK	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 2483.56	63.73	74.00	-10.27	51.12	26.64	8.94	33.00	10.03	133	30	PEAK																											
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.56</td><td>51.25</td><td>54.00</td><td>-2.75</td><td>38.64</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>133</td><td>30</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.56	51.25	54.00	-2.75	38.64	26.64	8.94	33.00	10.03	133	30	AVERAGE	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 2483.56	51.25	54.00	-2.75	38.64	26.64	8.94	33.00	10.03	133	30	AVERAGE																											

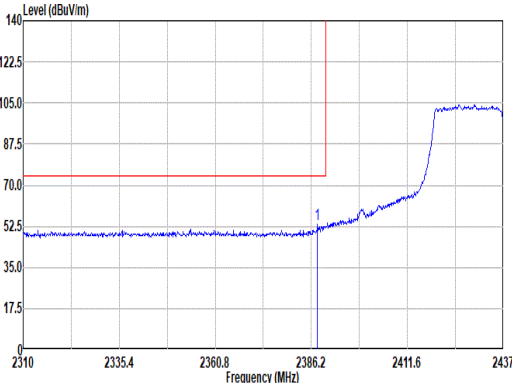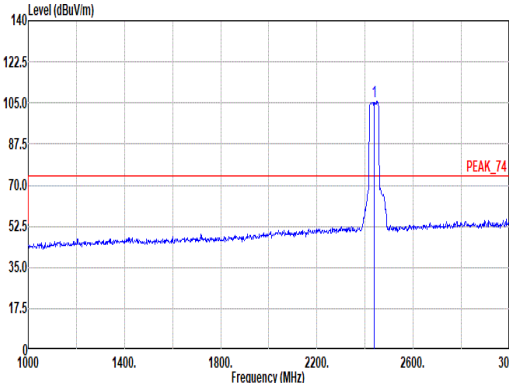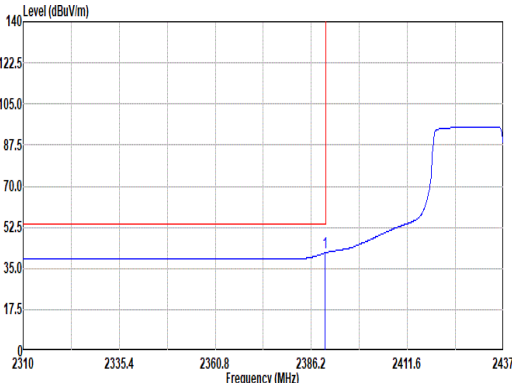
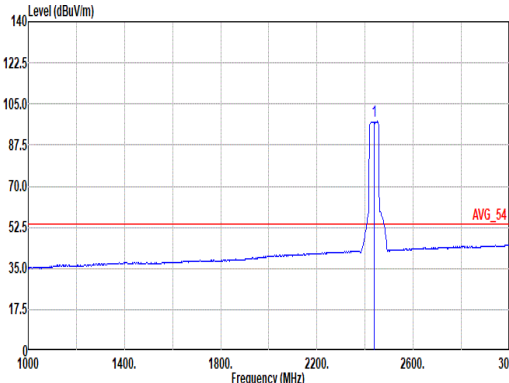


Mode	11																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																		
ANT	1+2																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2387.05</td><td>53.35</td><td>74.00</td><td>-20.65</td><td>40.00</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>200</td><td>6 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg		1	2387.05	53.35	74.00	-20.65	40.00	26.70	8.75	32.93	10.03	200	6 PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>105.06</td><td>-----</td><td>-----</td><td>93.23</td><td>26.70</td><td>8.87</td><td>32.97</td><td>10.03</td><td>200</td><td>6 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg		1	2437.00	105.06	-----	-----	93.23	26.70	8.87	32.97	10.03	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2387.05	53.35	74.00	-20.65	40.00	26.70	8.75	32.93	10.03	200	6 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	105.06	-----	-----	93.23	26.70	8.87	32.97	10.03	200	6 PEAK																																																																																								
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.88</td><td>41.60</td><td>54.00</td><td>-12.40</td><td>29.05</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>200</td><td>6 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg		1	2389.88	41.60	54.00	-12.40	29.05	26.70	8.75	32.93	10.03	200	6 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>97.49</td><td>-----</td><td>-----</td><td>84.90</td><td>26.66</td><td>8.88</td><td>32.98</td><td>10.03</td><td>200</td><td>6 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg		1	2437.00	97.49	-----	-----	84.90	26.66	8.88	32.98	10.03	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.88	41.60	54.00	-12.40	29.05	26.70	8.75	32.93	10.03	200	6 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	97.49	-----	-----	84.90	26.66	8.88	32.98	10.03	200	6 AVERAGE																																																																																								

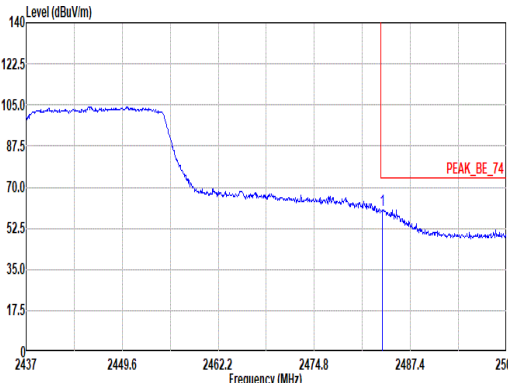
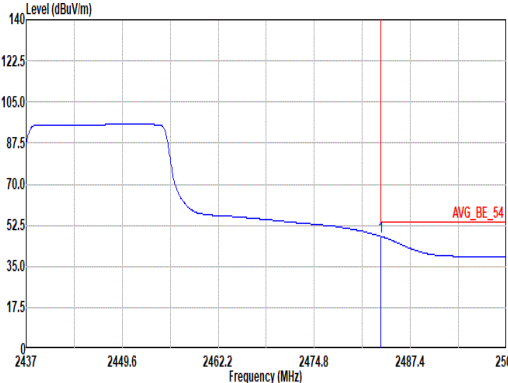


Mode	11																																																				
	Band Edge - R																																																				
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																				
ANT	1+2																																																				
Pol.	Vertical						Fundamental																																														
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>60.22</td><td>74.00</td><td>-13.78</td><td></td><td>47.61</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>200</td><td>6</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2483.68	60.22	74.00	-13.78		47.61	26.64	8.94	33.00	10.03	200	6	PEAK	Blank				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																								
1	2483.68	60.22	74.00	-13.78		47.61	26.64	8.94	33.00	10.03	200	6	PEAK																																								
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>47.74</td><td>54.00</td><td>-6.26</td><td></td><td>35.13</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>200</td><td>6</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2483.56	47.74	54.00	-6.26		35.13	26.64	8.94	33.00	10.03	200	6	AVERAGE	Blank				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																								
1	2483.56	47.74	54.00	-6.26		35.13	26.64	8.94	33.00	10.03	200	6	AVERAGE																																								



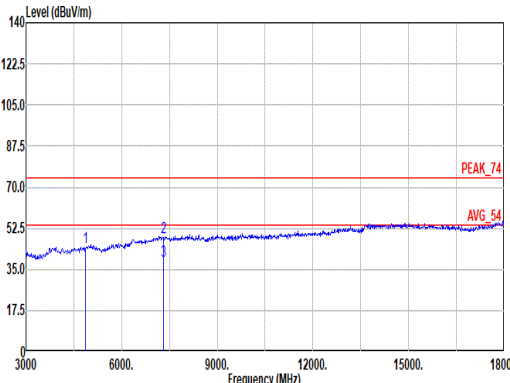
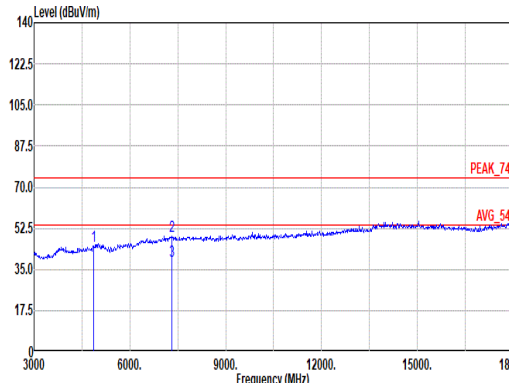


Mode	11																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																																																	
ANT	1+2																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 11 Setting : Plane : <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>44.26</td><td>74.00</td><td>-29.74</td><td>32.94</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42 -- -- PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>48.60</td><td>74.00</td><td>-25.40</td><td>32.01</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63 -- -- PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>38.45</td><td>54.00</td><td>-15.55</td><td>21.06</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63 -- -- AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4874.00	44.26	74.00	-29.74	32.94	32.35	12.73	34.18	0.42 -- -- PEAK	2	7311.00	48.60	74.00	-25.40	32.01	36.72	15.95	36.71	0.63 -- -- PEAK	3	7311.00	38.45	54.00	-15.55	21.06	36.72	15.95	36.71	0.63 -- -- AVERAGE	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 11 Setting : Plane : <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>44.72</td><td>74.00</td><td>-29.28</td><td>33.40</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42 -- -- PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>49.28</td><td>74.00</td><td>-24.72</td><td>32.69</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63 -- -- PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>38.49</td><td>54.00</td><td>-15.51</td><td>21.90</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63 -- -- AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4874.00	44.72	74.00	-29.28	33.40	32.35	12.73	34.18	0.42 -- -- PEAK	2	7311.00	49.28	74.00	-24.72	32.69	36.72	15.95	36.71	0.63 -- -- PEAK	3	7311.00	38.49	54.00	-15.51	21.90	36.72	15.95	36.71
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																										
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																									
1	4874.00	44.26	74.00	-29.74	32.94	32.35	12.73	34.18	0.42 -- -- PEAK																																																																																																																									
2	7311.00	48.60	74.00	-25.40	32.01	36.72	15.95	36.71	0.63 -- -- PEAK																																																																																																																									
3	7311.00	38.45	54.00	-15.55	21.06	36.72	15.95	36.71	0.63 -- -- AVERAGE																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																										
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																									
1	4874.00	44.72	74.00	-29.28	33.40	32.35	12.73	34.18	0.42 -- -- PEAK																																																																																																																									
2	7311.00	49.28	74.00	-24.72	32.69	36.72	15.95	36.71	0.63 -- -- PEAK																																																																																																																									
3	7311.00	38.49	54.00	-15.51	21.90	36.72	15.95	36.71	0.63 -- -- AVERAGE																																																																																																																									

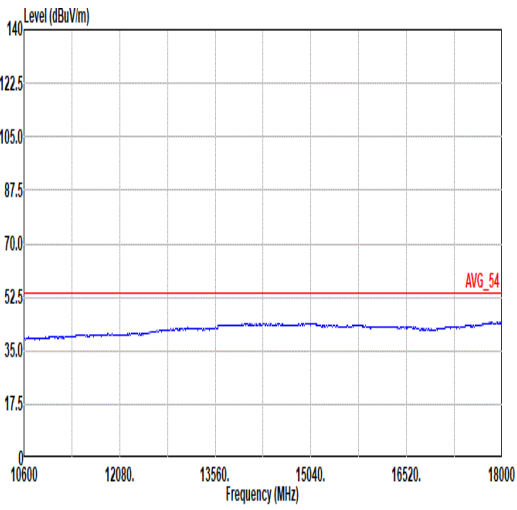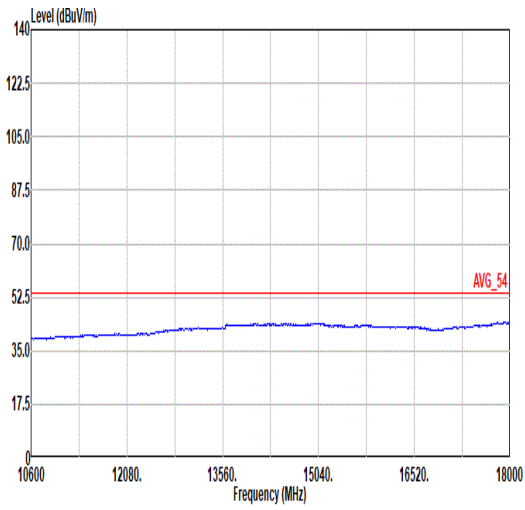

Mode	11	
	Harmonic	
	2400-2483.5_802.11n HT40_CH06_2437MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 11 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 11 Setting : Plane :

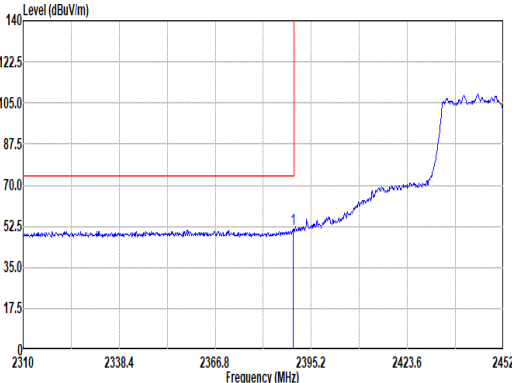
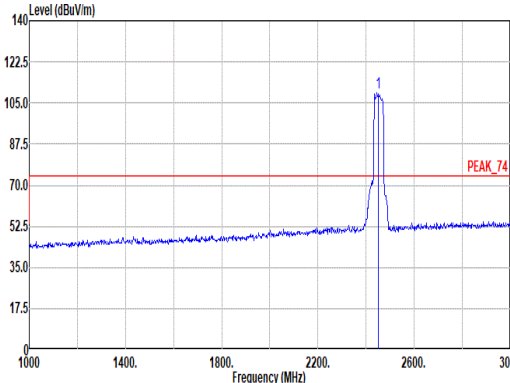
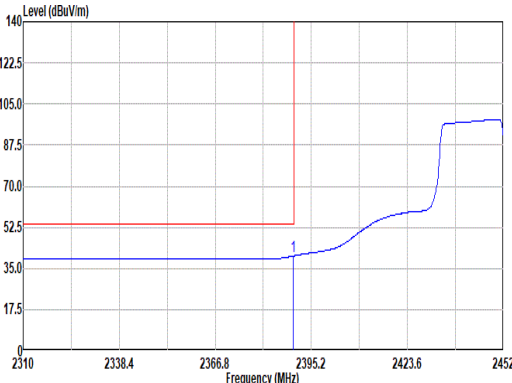
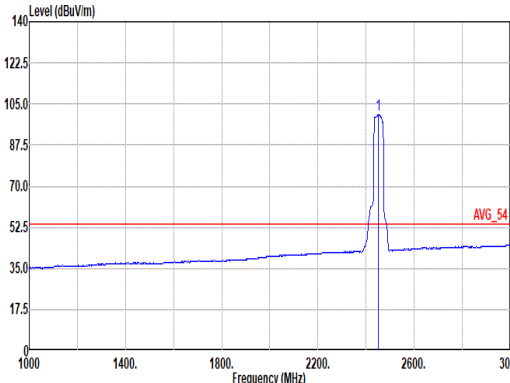


Mode	12																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																		
ANT	1+2																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2309.95</td><td>51.02</td><td>74.00</td><td>-22.98</td><td>38.47</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>133</td><td>30</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2309.95	51.02	74.00	-22.98	38.47	26.70	8.75	32.93	10.03	133	30	PEAK	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>109.25</td><td>-----</td><td>-----</td><td>96.63</td><td>26.70</td><td>8.86</td><td>32.97</td><td>10.03</td><td>133</td><td>30</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	109.25	-----	-----	96.63	26.70	8.86	32.97	10.03	133	30
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2309.95	51.02	74.00	-22.98	38.47	26.70	8.75	32.93	10.03	133	30	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	109.25	-----	-----	96.63	26.70	8.86	32.97	10.03	133	30	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2309.95</td><td>40.30</td><td>54.00</td><td>-13.70</td><td>27.75</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>133</td><td>30</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2309.95	40.30	54.00	-13.70	27.75	26.70	8.75	32.93	10.03	133	30	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>100.54</td><td>-----</td><td>-----</td><td>88.03</td><td>26.58</td><td>8.88</td><td>32.98</td><td>10.03</td><td>133</td><td>30</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	100.54	-----	-----	88.03	26.58	8.88	32.98	10.03	133	30
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2309.95	40.30	54.00	-13.70	27.75	26.70	8.75	32.93	10.03	133	30	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	100.54	-----	-----	88.03	26.58	8.88	32.98	10.03	133	30	AVERAGE																																																																																							





Mode	12																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH09_2452MHz																																													
ANT	1+2																																													
Pol.	Horizontal	Fundamental																																												
Peak	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2484.02</td><td>63.46</td><td>74.00</td><td>-10.54</td><td>50.85</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>133</td><td>30</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.02	63.46	74.00	-10.54	50.85	26.64	8.94	33.00	10.03	133	30	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1 2484.02	63.46	74.00	-10.54	50.85	26.64	8.94	33.00	10.03	133	30	PEAK																																			
Avg	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.54</td><td>51.77</td><td>54.00</td><td>-2.23</td><td>39.16</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>133</td><td>30</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.54	51.77	54.00	-2.23	39.16	26.64	8.94	33.00	10.03	133	30	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1 2483.54	51.77	54.00	-2.23	39.16	26.64	8.94	33.00	10.03	133	30	AVERAGE																																			

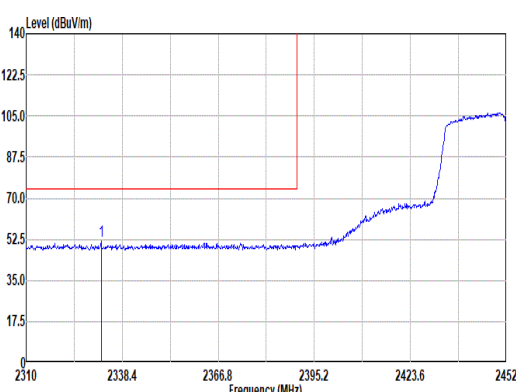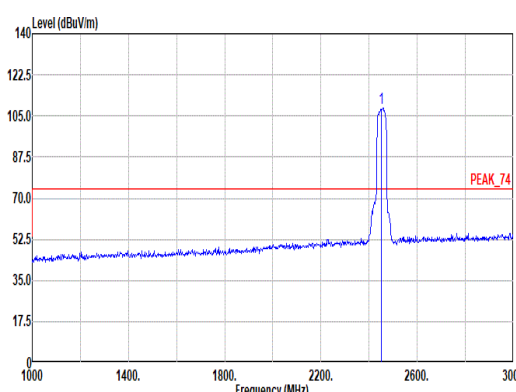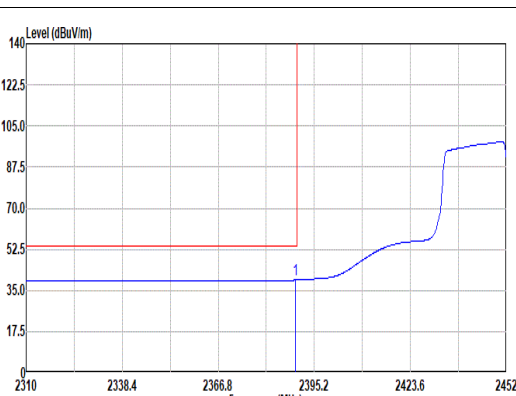
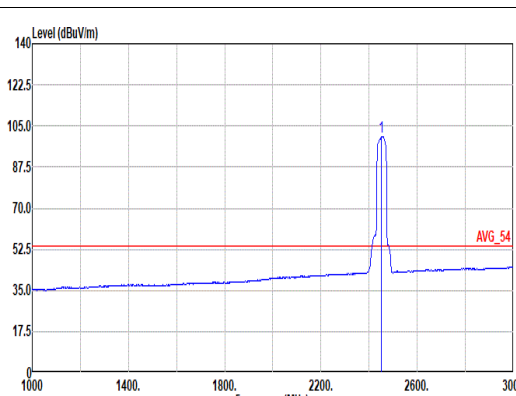


Mode	12																																																																																																											
	Band Edge - L																																																																																																											
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																											
ANT	1+2																																																																																																											
Pol.	Vertical						Fundamental																																																																																																					
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2332.15</td><td>51.64</td><td>74.00</td><td>-22.36</td><td>38.99</td><td>26.88</td><td>8.63</td><td>32.89</td><td>10.03</td><td>285</td><td>29 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2332.15	51.64	74.00	-22.36	38.99	26.88	8.63	32.89	10.03	285	29 PEAK	 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>108.53</td><td>-----</td><td>-----</td><td>96.05</td><td>26.54</td><td>8.89</td><td>32.98</td><td>10.03</td><td>285</td><td>29 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2452.00	108.53	-----	-----	96.05	26.54	8.89	32.98	10.03	285	29 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2332.15	51.64	74.00	-22.36	38.99	26.88	8.63	32.89	10.03	285	29 PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2452.00	108.53	-----	-----	96.05	26.54	8.89	32.98	10.03	285	29 PEAK																																																																																																	
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.52</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>26.82</td><td>26.70</td><td>8.75</td><td>32.93</td><td>10.03</td><td>285</td><td>29 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.52	39.37	54.00	-14.63	26.82	26.70	8.75	32.93	10.03	285	29 AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>100.64</td><td>-----</td><td>-----</td><td>88.09</td><td>26.62</td><td>8.88</td><td>32.98</td><td>10.03</td><td>285</td><td>29 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2452.00	100.64	-----	-----	88.09	26.62	8.88	32.98	10.03	285	29 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2389.52	39.37	54.00	-14.63	26.82	26.70	8.75	32.93	10.03	285	29 AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2452.00	100.64	-----	-----	88.09	26.62	8.88	32.98	10.03	285	29 AVERAGE																																																																																																	

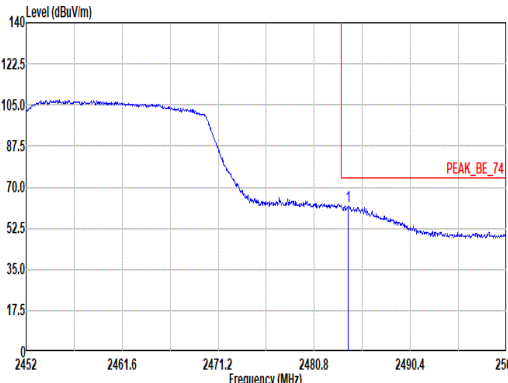
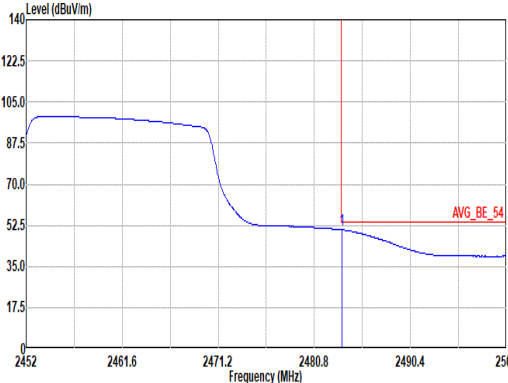


Mode	12																																																				
	Band Edge - R																																																				
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																				
ANT	1+2																																																				
Pol.	Vertical						Fundamental																																														
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.21</td><td>62.00</td><td>74.00</td><td>-12.00</td><td>49.39</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>285</td><td>29 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2484.21	62.00	74.00	-12.00	49.39	26.64	8.94	33.00	10.03	285	29 PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																												
1	2484.21	62.00	74.00	-12.00	49.39	26.64	8.94	33.00	10.03	285	29 PEAK																																										
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>50.65</td><td>54.00</td><td>-3.35</td><td>38.04</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>285</td><td>29 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.54	50.65	54.00	-3.35	38.04	26.64	8.94	33.00	10.03	285	29 AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																												
1	2483.54	50.65	54.00	-3.35	38.04	26.64	8.94	33.00	10.03	285	29 AVERAGE																																										

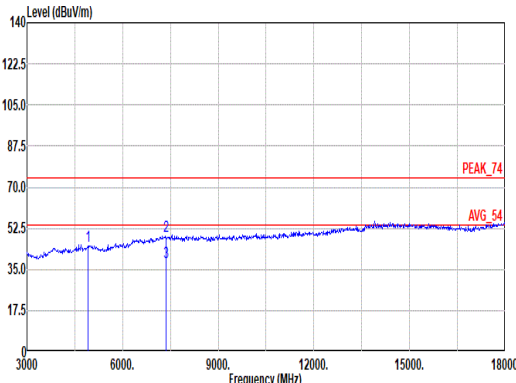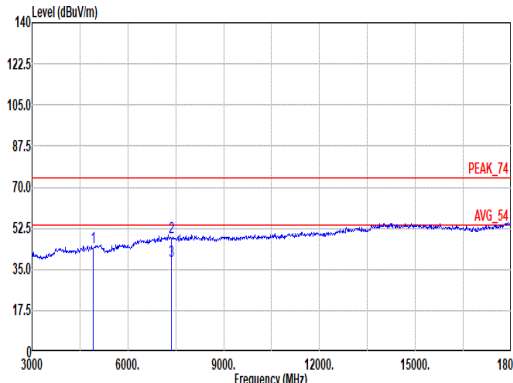


Mode	12																																																																																									
	Harmonic																																																																																									
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																									
ANT	1+2																																																																																									
Pol.	Horizontal						Vertical																																																																																			
Peak Avg																																																																																										
	Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 12 Setting : Plane :						Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 12 Setting : Plane :																																																																																			
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4904.00</td><td>44.94</td><td>74.00</td><td>-29.06</td><td>33.54</td><td>32.42</td><td>12.76</td><td>34.19</td><td>0.41</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>48.95</td><td>74.00</td><td>-25.05</td><td>32.21</td><td>36.80</td><td>16.00</td><td>36.75</td><td>0.69</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7356.00</td><td>38.27</td><td>54.00</td><td>-15.73</td><td>21.53</td><td>36.80</td><td>16.00</td><td>36.75</td><td>0.69</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>																Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4904.00	44.94	74.00	-29.06	33.54	32.42	12.76	34.19	0.41	--	--	PEAK	2	7356.00	48.95	74.00	-25.05	32.21	36.80	16.00	36.75	0.69	--	--	PEAK	3	7356.00	38.27	54.00	-15.73	21.53	36.80	16.00	36.75	0.69	--	--	AVERAGE
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	4904.00	44.94	74.00	-29.06	33.54	32.42	12.76	34.19	0.41	--	--	PEAK																																																																														
2	7356.00	48.95	74.00	-25.05	32.21	36.80	16.00	36.75	0.69	--	--	PEAK																																																																														
3	7356.00	38.27	54.00	-15.73	21.53	36.80	16.00	36.75	0.69	--	--	AVERAGE																																																																														

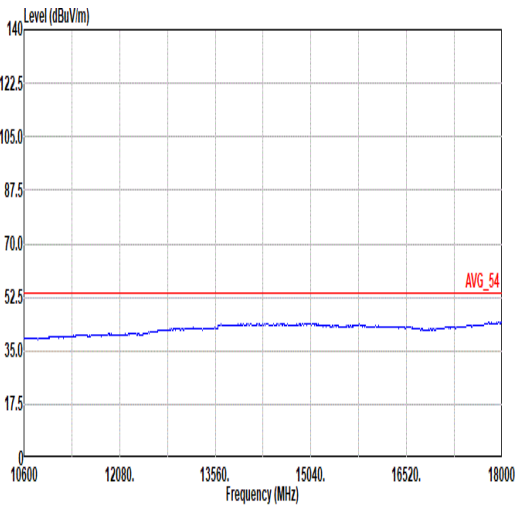
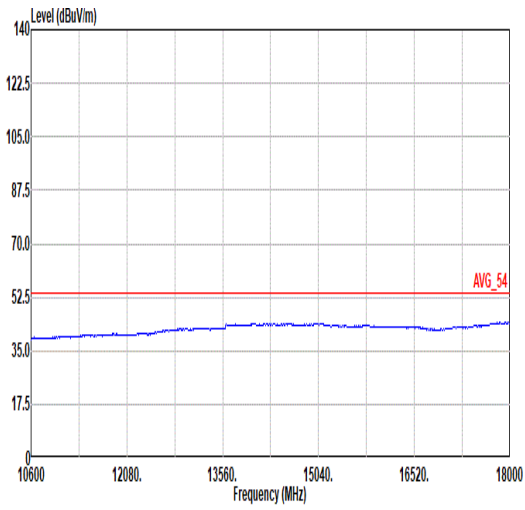


Mode	12	
	Harmonic	
	2400-2483.5_802.11n HT40_CH09_2452MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL Mode : 12 Setting : Plane :	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL Mode : 12 Setting : Plane :

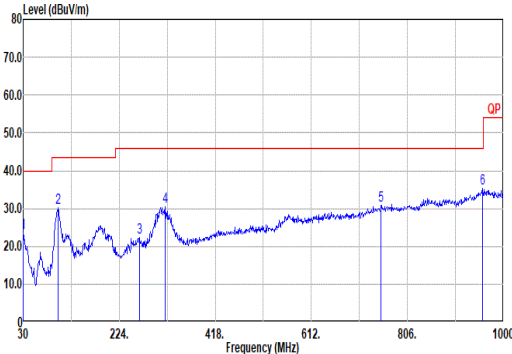

Mode	13																																																																																																																												
	LF																																																																																																																												
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																																												
ANT	1+2																																																																																																																												
Pol.	Horizontal																																																																																																																												
QP/ Peak																																																																																																																													
	Site : 03CH21-HY Condition: QP 3m LF_633038001_241217 HORIZONTAL Mode : 13 Setting : Plane :																																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																
	1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																															
	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																															
	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																															
	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																															
	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																															
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>30.01</td><td>25.30</td><td>0.85</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>100.81</td><td>30.16</td><td>43.50</td><td>-13.34</td><td>45.07</td><td>16.04</td><td>1.73</td><td>32.69</td><td>0.01</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.45</td><td>46.00</td><td>-23.55</td><td>32.06</td><td>20.11</td><td>2.84</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>316.15</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>40.49</td><td>19.40</td><td>3.12</td><td>32.65</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>30.90</td><td>46.00</td><td>-15.10</td><td>30.36</td><td>28.30</td><td>4.82</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>29.56</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak	2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak	3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak	4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak	5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak	6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	30.00	23.54	40.00	-16.46	30.01	25.30	0.85	32.65	0.03	--	--	--	Peak																																																																																																																
2	100.81	30.16	43.50	-13.34	45.07	16.04	1.73	32.69	0.01	--	--	--	Peak																																																																																																																
3	264.74	22.45	46.00	-23.55	32.06	20.11	2.84	32.63	0.07	--	--	--	Peak																																																																																																																
4	316.15	30.43	46.00	-15.57	40.49	19.40	3.12	32.65	0.07	--	--	--	Peak																																																																																																																
5	752.65	30.90	46.00	-15.10	30.36	28.30	4.82	32.69	0.11	--	--	--	Peak																																																																																																																
6	958.29	35.40	46.00	-10.60	29.56	31.50	5.47	31.33	0.20	--	--	--	Peak																																																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</</th></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB</																																																																																													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB</																																																																																																																								

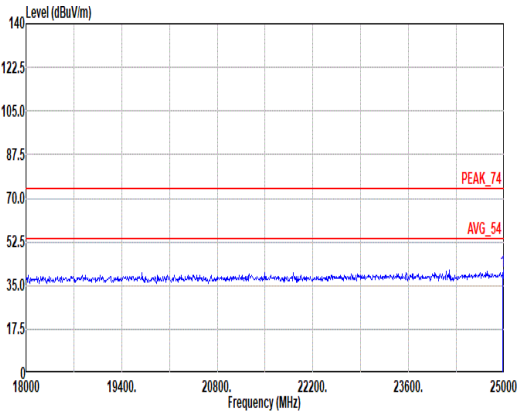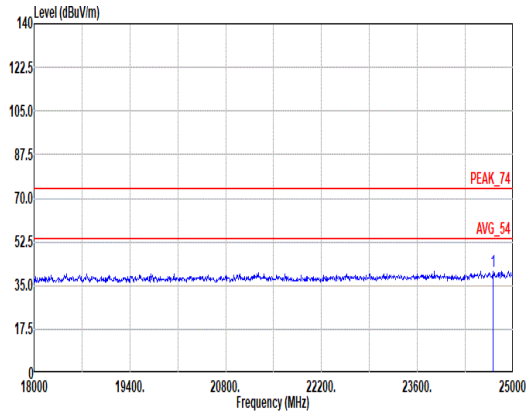

Mode	14																																																							
	SHF																																																							
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																							
ANT	1+2																																																							
Pol.	Horizontal						Vertical																																																	
Peak																																																								
	Site : 03CH21-HY Condition: PEAK_74 1m BBH49170_1224_240624 HORIZONTAL Mode : 14 Setting : Plane :																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24977.26</td><td>40.43</td><td>74.00</td><td>-33.57</td><td>41.63</td><td>39.41</td><td>29.22</td><td>60.29</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24977.26	40.43	74.00	-33.57	41.63	39.41	29.22	60.29	-9.54	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	24977.26	40.43	74.00	-33.57	41.63	39.41	29.22	60.29	-9.54	--	--	PEAK																																												
Site : 03CH21-HY Condition: PEAK_74 1m BBH49170_1224_240624 VERTICAL Mode : 14 Setting : Plane :																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24706.00</td><td>40.74</td><td>74.00</td><td>-33.26</td><td>42.08</td><td>39.31</td><td>29.07</td><td>60.18</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	24706.00	40.74	74.00	-33.26	42.08	39.31	29.07	60.18	-9.54	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	24706.00	40.74	74.00	-33.26	42.08	39.31	29.07	60.18	-9.54	--	--	PEAK																																												



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
4+5	802.11b	98.28	-	-	10Hz
4+5	802.11g	99.25	-	-	10Hz
4+5	2.4GHz 802.11n HT20	99.78	-	-	10Hz
4+5	2.4GHz 802.11n HT40	99.67	-	-	10Hz

MIMO <Ant. 4+5>

