

# TEST REPORT

**Product** : Wireless car charger  
**Trade mark** : ROMOSS  
**Model/Type reference** : AW15C-10  
**Serial Number** : N/A  
**Report Number** : EED32R80600801  
**FCC ID** : 2A6QM-AW15C-10  
**Date of Issue** : Aug. 13, 2025  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**Shenzhen Romoss Technology Co., Ltd.**  
**Room1601, BLOCK B, Building 7, Shenzhen International Innovation Valley, Dashi 1st Road Xili community, Xili Street, Nanshan, Shenzhen, Guangdong, P.R.China**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Compiled by:

*Keven Tan.*

Keven Tan

Reviewed by:

*Frazer. Li*

Frazer Li

Approved by:

*Aaron Ma*

Aaron Ma

Date:

Aug. 13, 2025



Check No.: 4500230425

## 1 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10:2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10:2013	PASS
Radiated Emissions	47 CFR Part 15 Subpart C Section 15.209	ANSI C63.10:2013	PASS

## 2 Contents

<b>1 TEST SUMMARY</b> .....	<b>2</b>
<b>2 CONTENTS</b> .....	<b>3</b>
<b>3 GENERAL INFORMATION</b> .....	<b>4</b>
3.1 CLIENT INFORMATION .....	4
3.2 GENERAL DESCRIPTION OF EUT .....	4
3.3 TEST ENVIRONMENT AND MODE .....	5
3.4 DESCRIPTION OF SUPPORT UNITS .....	6
3.5 TEST LOCATION .....	6
3.6 DEVIATION FROM STANDARDS .....	6
3.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	6
3.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	6
3.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) .....	6
<b>4 EQUIPMENT LIST</b> .....	<b>7</b>
<b>5 TEST RESULTS AND MEASUREMENT DATA</b> .....	<b>9</b>
5.1 ANTENNA REQUIREMENT .....	9
5.2 CONDUCTED EMISSIONS .....	10
5.3 RADIATED EMISSIONS .....	13
<b>APPENDIX 1 PHOTOGRAPHS OF TEST SETUP</b> .....	<b>19</b>
<b>APPENDIX 2 PHOTOGRAPHS OF EUT</b> .....	<b>21</b>

### 3 General Information

#### 3.1 Client Information

Applicant:	Shenzhen Romoss Technology Co., Ltd.
Address of Applicant:	Room1601, BLOCK B, Building 7, Shenzhen International Innovation Valley, Dashi 1st Road Xili community, Xili Street, Nanshan, Shenzhen, Guangdong, P.R.China
Manufacturer:	Jiangmen Romoss Technology Co., Ltd.
Address of Manufacturer:	Room 01-2, First floor, Building 8, No. 80, Renhe Road, Tangxia Town, Pengjiang District, Jiangmen City
Factory:	Jiangmen Romoss Technology Co., Ltd.
Address of Factory:	Room 01-2, First floor, Building 8, No. 80, Renhe Road, Tangxia Town, Pengjiang District, Jiangmen City

#### 3.2 General Description of EUT

Product Name:	Wireless car charger
Model No.:	ROMOSS
Trade Mark:	AW15C-10
Device type:	Desktop applications device
Frequency Range:	111kHz-200kHz
Center Frequency:	127kHz
Modulation Type:	ASK
Antenna Type:	Coil antenna
Power Supply:	TYPE-C: DC 5V, 3A / 9V,3A Wireless output: 5W/7.5W/10W/15W
Test Power Grade:	Default
Test Software of EUT:	N/A
Sample Received Date:	Apr. 23, 2025
Sample tested Date:	Apr. 25, 2025 to May 20, 2025

### 3.3 Test Environment and Mode

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Test mode:Transmitting mode	
Mode a:	Wireless charging mode(Null load)(Connect to adapter)
Mode b:	Wireless charging mode(Half load)(Connect to adapter)
Mode c:	Wireless charging mode(75% load)(Connect to adapter)
Mode d:	Wireless charging mode(Full load)(Connect to adapter)
Note: 1.Wireless output:2.5W,5W,7.5W,10W,15W(maximum wireless output 15W during charging); 2.Through Pre-scan,when EUT power by DC 12.0V was the worst case, only the worst case data was recorded in the report.	



### 3.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
AC adapter	MI	MDY-11-EF	FCC ID and DOC	CTI
Intelligent wireless charging full function test module	YBZ	/	FCC ID and DOC	CTI

### 3.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

### 3.6 Deviation from Standards

None.

### 3.7 Abnormalities from Standard Conditions

None.

### 3.8 Other Information Requested by the Customer

None.

### 3.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 4 Equipment List

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-08-2025	04-07-2026
Temperature/ Humidity Indicator	Defu	TH128	/	03-31-2025	03-30-2026
LISN	R&S	ENV216	100098	09-19-2024	09-18-2025
Barometer	changchun	DYM3	1188	---	---
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---
Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-18-2024	06-17-2025
ISN	TESEQ	ISN T800	30297	12-05-2024	12-04-2025

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05/22/2022	05/21/2025
Receiver	R&S	ESCI7	100938-003	09/07/2024	09/06/2025
Spectrum Analyzer	R&S	FSV40	101200	07/18/2024	07/17/2025
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/22/2022	05/21/2025
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/07/2025	04/06/2026
Microwave Preamplifier	Tonscend	EMC051845SE	980380	12/05/2024	12/04/2025
Horn Antenna	A.H.SYSTEMS	SAS-574	374	07/02/2023	07/01/2026
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/07/2025	04/06/2026
Preamplifier	Agilent	11909A	12-1	03/03/2025	03/02/2026
Preamplifier	CD	PAP-1840-60	6041.6042	06/19/2024	06/18/2025
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---
Cable line	Fulai(7M)	SF106	5219/6A	05/22/2022	05/21/2025
Cable line	Fulai(6M)	SF106	5220/6A	05/22/2022	05/21/2025
Cable line	Fulai(3M)	SF106	5216/6A	05/22/2022	05/21/2025
Cable line	Fulai(3M)	SF106	5217/6A	05/22/2022	05/21/2025



## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>EUT Antenna:</b>	Please see Internal photos
The antenna is Coil antenna and no consideration of replacement.	

## 5.2 Conducted Emissions

**Test Requirement:** 47 CFR Part 15C Section 15.207  
**Test Method:** ANSI C63.10: 2013  
**Test Frequency Range:** 150kHz to 30MHz

**Limit:**


Frequency range (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

**Test Procedure:**

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.

**Test Setup:**

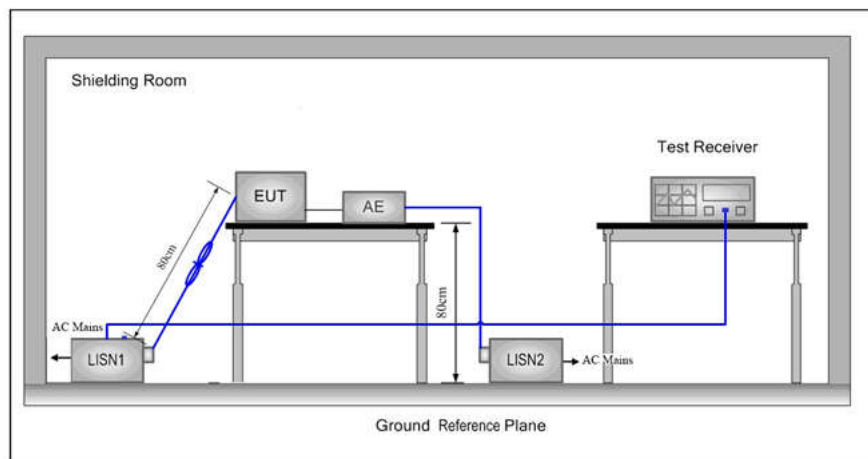


**Test Mode:** Transmitting mode, refer to section 4.3

**Test Results:** Pass

Measurement Data (Mode d):

Live line:

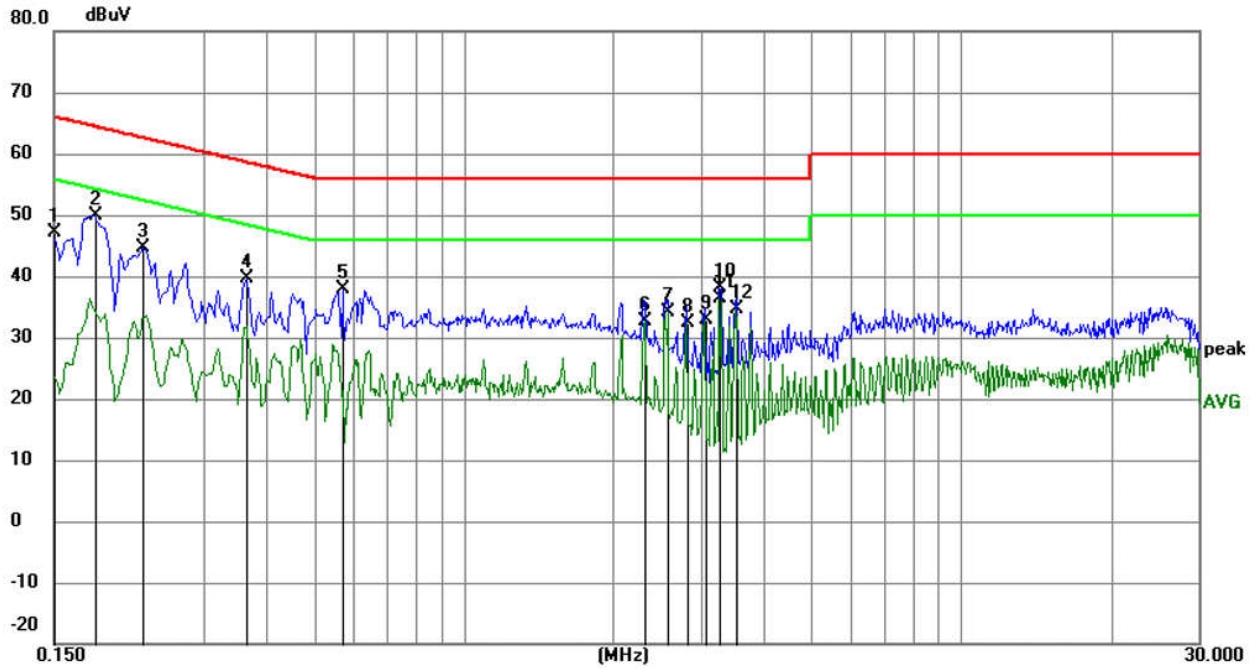


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	36.77	10.28	47.05	66.00	-18.95	QP	
2		0.1815	39.76	10.24	50.00	64.42	-14.42	QP	
3		0.2265	34.45	10.19	44.64	62.58	-17.94	QP	
4		0.3660	29.55	10.10	39.65	58.59	-18.94	QP	
5		0.5730	27.84	10.09	37.93	56.00	-18.07	QP	
6		2.3145	22.51	10.16	32.67	46.00	-13.33	AVG	
7		2.5710	23.89	10.15	34.04	46.00	-11.96	AVG	
8		2.8140	22.22	10.14	32.36	46.00	-13.64	AVG	
9		3.0615	22.71	10.13	32.84	46.00	-13.16	AVG	
10		3.2685	28.05	10.12	38.17	56.00	-17.83	QP	
11	*	3.2685	26.33	10.12	36.45	46.00	-9.55	AVG	
12		3.5115	24.52	10.11	34.63	46.00	-11.37	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

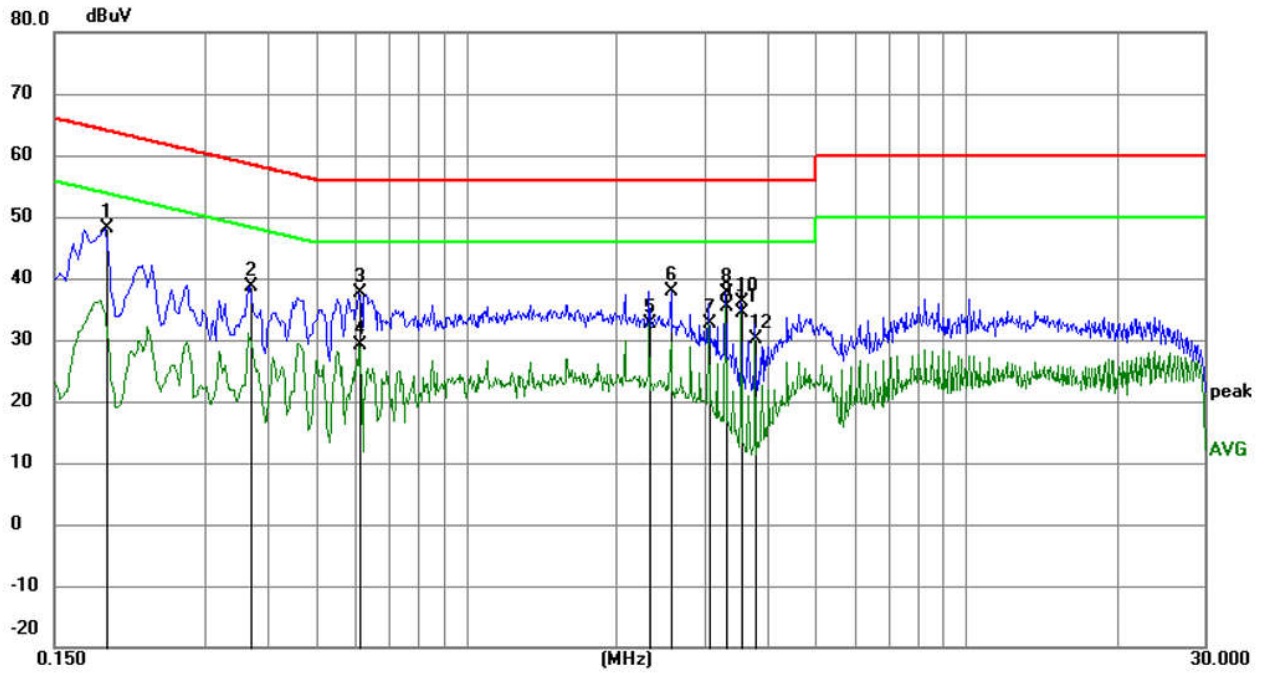

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1905	37.89	10.22	48.11	64.01	-15.90	QP	
2		0.3704	28.42	10.10	38.52	58.49	-19.97	QP	
3		0.6134	27.49	10.10	37.59	56.00	-18.41	QP	
4		0.6134	19.09	10.10	29.19	46.00	-16.81	AVG	
5		2.3280	22.47	10.16	32.63	46.00	-13.37	AVG	
6		2.5710	27.84	10.15	37.99	56.00	-18.01	QP	
7		3.0615	22.56	10.13	32.69	46.00	-13.31	AVG	
8		3.3045	27.44	10.12	37.56	56.00	-18.44	QP	
9	*	3.3045	25.37	10.12	35.49	46.00	-10.51	AVG	
10		3.5520	26.05	10.11	36.16	56.00	-19.84	QP	
11		3.5520	24.17	10.11	34.28	46.00	-11.72	AVG	
12		3.7860	19.97	10.10	30.07	46.00	-15.93	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.



## 5.3 Radiated Emissions

**Test Requirement:** 47 CFR Part 15C Section 15.231(b) and 15.209

**Test Method:** ANSI C63.10 2013

**Test Site:** Measurement Distance: 3m (Semi-Anechoic Chamber)

**Receiver Setup:**

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak

**Test Setup:**

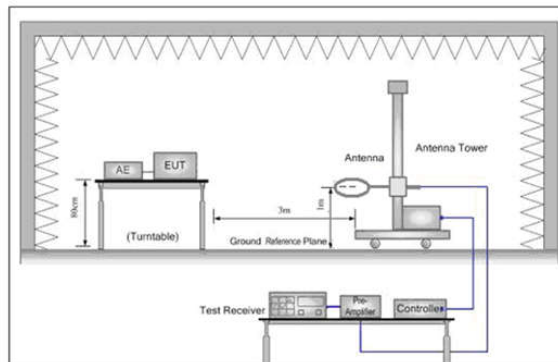


Figure . Below 30MHz

**Test Procedure:**

### Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Limit:**  
(Spurious  
Emissions)

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

**Test Mode:**

Transmitting mode, refer to section 4.3


**Test Results:**

Pass



9kHz~150kHz:

Measurement Data (Mode d):

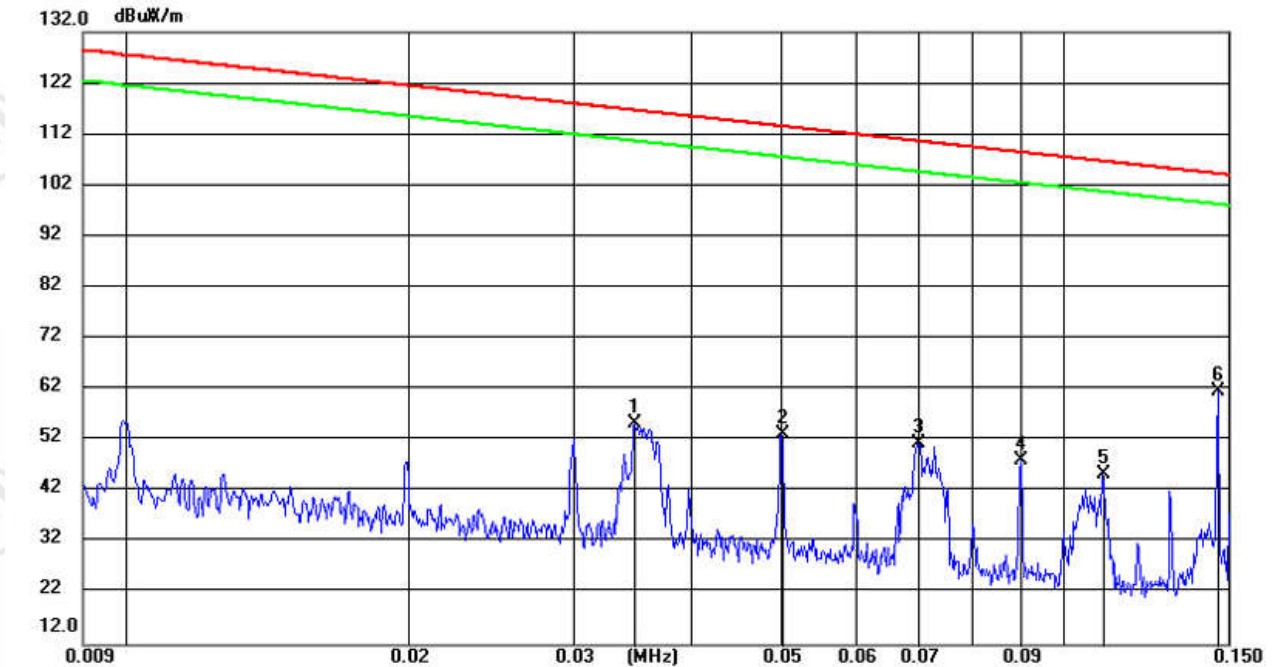


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		0.0349	34.39	20.92	55.31	116.67	-61.36	peak	100	263	
2		0.0501	32.37	20.90	53.27	113.54	-60.27	peak	100	352	
3		0.0700	30.49	20.83	51.32	110.65	-59.33	peak	100	249	
4		0.0901	27.42	20.85	48.27	108.46	-60.19	peak	100	352	
5		0.1101	24.71	20.84	45.55	106.72	-61.17	peak	100	352	
6	*	0.1462	40.75	20.91	61.66	104.27	-42.61	peak	100	220	

Remark:

1. According to ANSI C63.10-2013 chapter 6.4.6, we tested the parallel, perpendicular, and ground-parallel of loop antenna, and recorded the worst parallel data of loop antenna in the report.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:  
 Final Test Level = Receiver Reading - Correct Factor  
 Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor
3. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning of horizontal which is the worst case.

**150kHz~30MHz:**

Measurement Data (Mode d):

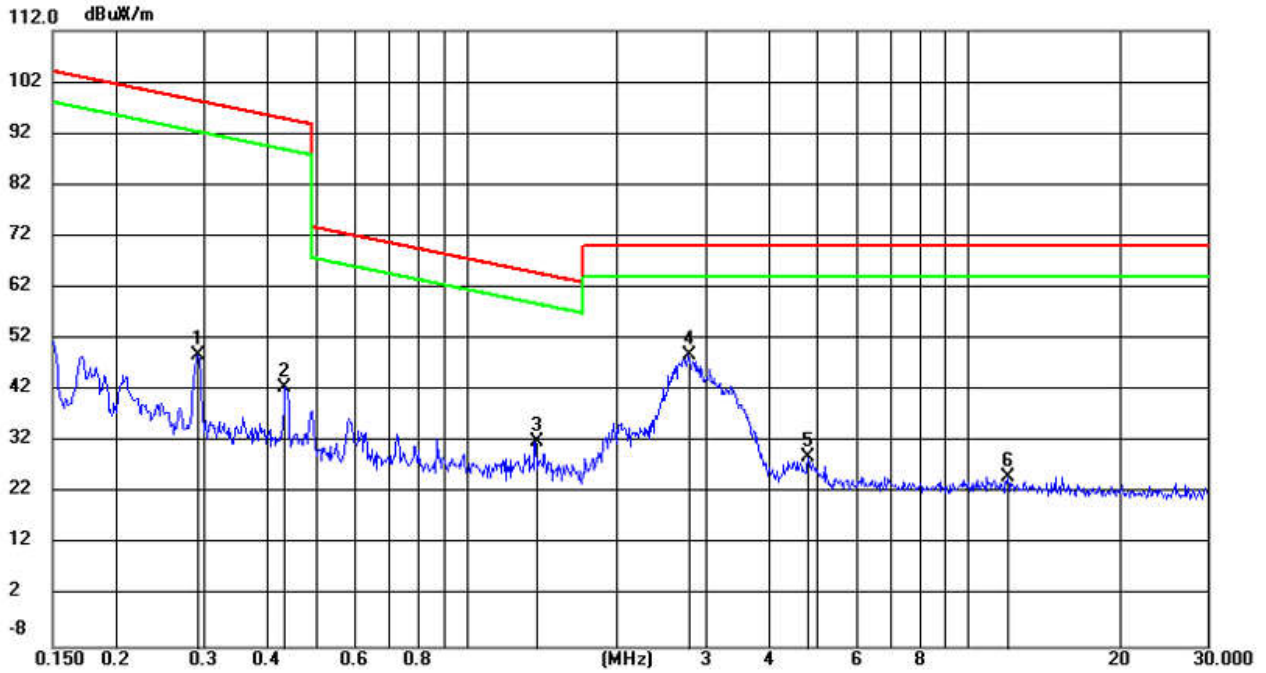

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		0.2909	27.94	20.96	48.90	98.31	-49.41	peak	100	251	
2		0.4351	21.79	20.68	42.47	94.83	-52.36	peak	100	100	
3		1.3738	11.65	20.47	32.12	64.87	-32.75	peak	100	158	
4	*	2.7648	28.46	20.42	48.88	70.00	-21.12	peak	100	7	
5		4.7969	8.64	20.41	29.05	70.00	-40.95	peak	100	7	
6		11.9961	4.65	20.49	25.14	70.00	-44.86	peak	100	237	

Remark:


1. According to ANSI C63.10-2013 chapter 6.4.6, we tested the parallel, perpendicular, and ground-parallel of loop antenna, and recorded the worst parallel data of loop antenna in the report.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:  
 Final Test Level = Receiver Reading - Correct Factor  
 Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor
3. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning of horizontal which is the worst case.

### 30MHz-1GHz:

Measurement Data (Mode d):

Polarization: Horizontal

72.0 dBuV/m

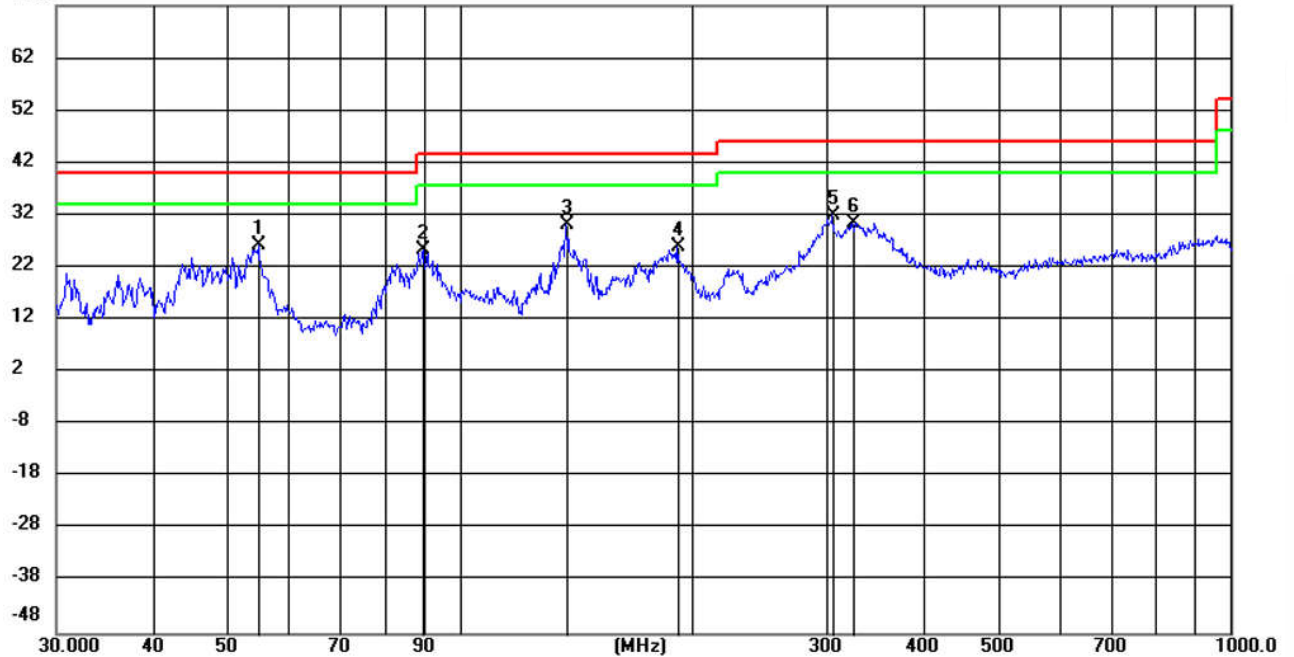

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		54.9021	12.15	13.96	26.11	40.00	-13.89	QP 100	133	
2		89.8574	13.78	11.45	25.23	43.50	-18.27	QP 199	352	
3	*	137.8787	19.62	10.55	30.17	43.50	-13.33	QP 199	56	
4		191.9805	13.28	12.79	26.07	43.50	-17.43	QP 100	28	
5		304.9305	15.23	16.73	31.96	46.00	-14.04	QP 100	175	
6		323.8877	13.07	17.29	30.36	46.00	-15.64	QP 100	207	

Remark:


1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor

Measurement Data (Mode d):

Polarization: Vertical

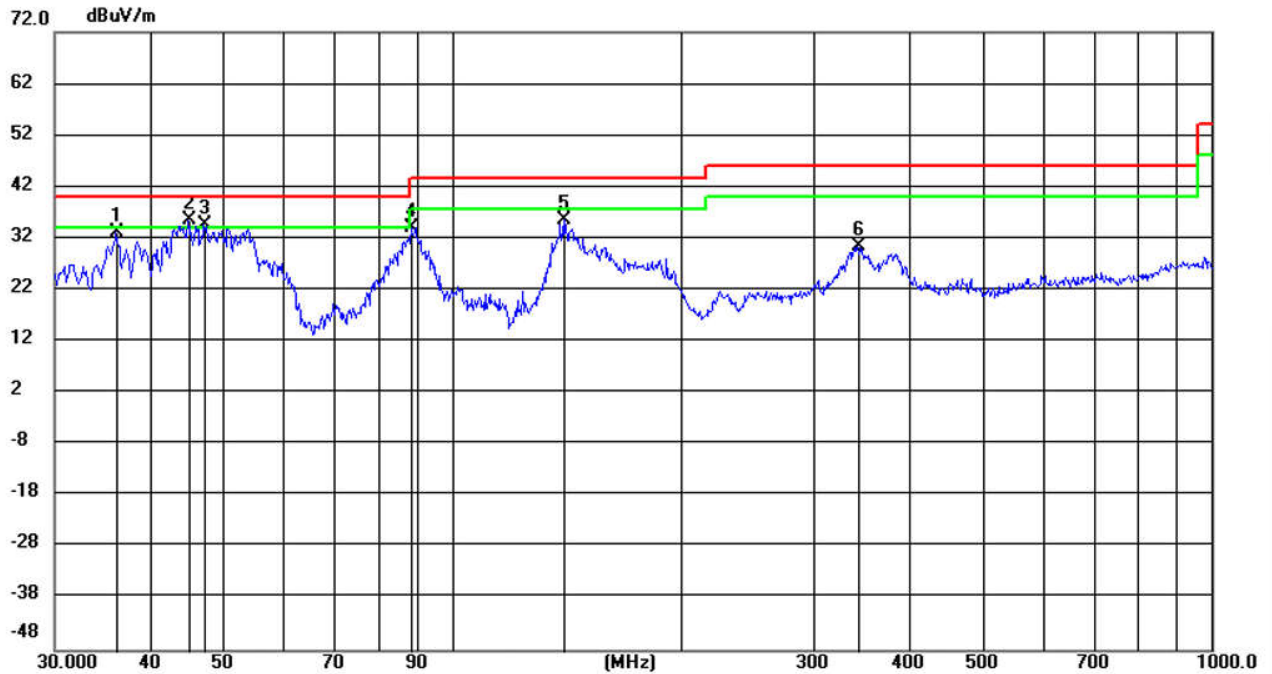

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		36.2159	20.51	12.71	33.22	40.00	-6.78	QP 100	193	
2	*	44.9715	21.68	13.75	35.43	40.00	-4.57	QP 100	183	
3	!	47.3089	20.55	14.13	34.68	40.00	-5.32	QP 100	161	
4		88.5903	22.88	11.20	34.08	43.50	-9.42	QP 100	299	
5		140.5637	25.04	10.45	35.49	43.50	-8.01	QP 100	0	
6		342.5788	12.48	17.86	30.34	46.00	-15.66	QP 100	352	

Remark:

1.The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

## Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

\*\*\* End of Report \*\*\*