



CERTIFICATION TEST REPORT

Report Number. : 11792114-E4V2

Applicant : APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Model : A1865, A1903

FCC ID : BCG-E3161A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:

August 28, 2017

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	8/23/2017	Initial Review	Tri Pham
V2	8/28/2017	Initial Review	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	12
2. TEST METHODOLOGY	13
3. FACILITIES AND ACCREDITATION	13
4. CALIBRATION AND UNCERTAINTY	14
4.1. MEASURING INSTRUMENT CALIBRATION	14
4.2. SAMPLE CALCULATION	14
4.3. MEASUREMENT UNCERTAINTY	14
5. EQUIPMENT UNDER TEST.....	15
5.1. DESCRIPTION OF EUT	15
5.2. MAXIMUM OUTPUT POWER	15
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	18
5.4. SOFTWARE AND FIRMWARE	18
5.5. WORST-CASE CONFIGURATION AND MODE.....	19
5.6. DESCRIPTION OF TEST SETUP	21
6. TEST AND MEASUREMENT EQUIPMENT	26
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	28
7.1. ON TIME AND DUTY CYCLE.....	28
7.2. MEASUREMENT METHODS.....	32
8. ANTENNA PORT TEST RESULTS.....	33
8.1. 11n HT20 UAT 2 SISO MODE IN THE 5.2GHz BAND	33
8.1.1. 26 dB BANDWIDTH	33
8.1.2. 99% BANDWIDTH.....	36
8.1.3. AVERAGE POWER.....	39
8.1.4. OUTPUT POWER AND PPSD	40
8.2. 11n HT20 LAT 3 SISO MODE IN THE 5.2GHz BAND.....	44
8.2.1. 26 dB BANDWIDTH	44
8.2.2. 99% BANDWIDTH.....	47
8.2.3. AVERAGE POWER.....	50
8.2.4. OUTPUT POWER AND PPSD	51
8.3. 11n HT20 2TX CDD MIMO MODE IN THE 5.2GHz BAND	55
8.3.1. 26 dB BANDWIDTH	55
8.3.2. 99% BANDWIDTH.....	59
8.3.3. AVERAGE POWER.....	63
8.3.4. OUTPUT POWER AND PPSD	64
8.4. 11n HT40 UAT 2 SISO MODE IN THE 5.2GHz BAND	70

8.4.1.	26 dB BANDWIDTH	70
8.4.2.	99% BANDWIDTH.....	72
8.4.3.	AVERAGE POWER.....	74
8.4.4.	OUTPUT POWER AND PPSD	75
8.5.	<i>11n HT40 LAT 3 SISO MODE IN THE 5.2GHz BAND</i>	<i>78</i>
8.5.1.	26 dB BANDWIDTH	78
8.5.2.	99% BANDWIDTH.....	80
8.5.3.	AVERAGE POWER.....	82
8.5.4.	OUTPUT POWER AND PPSD	83
8.6.	<i>11n HT40 2TX CDD MIMO MODE IN THE 5.2GHz BAND</i>	<i>86</i>
8.6.1.	26 dB BANDWIDTH	86
8.6.2.	99% BANDWIDTH.....	89
8.6.3.	AVERAGE POWER.....	92
8.6.4.	OUTPUT POWER AND PPSD	93
8.7.	<i>11ac HT80 UAT 2 SISO MODE IN THE 5.2GHz BAND</i>	<i>98</i>
8.7.1.	26 dB BANDWIDTH	98
8.7.2.	99% BANDWIDTH.....	100
8.7.3.	AVERAGE POWER.....	102
8.7.4.	OUTPUT POWER AND PPSD	103
8.8.	<i>11ac HT80 LAT 3 SISO MODE IN THE 5.2GHz BAND</i>	<i>106</i>
8.8.1.	26 dB BANDWIDTH	106
8.8.2.	99% BANDWIDTH.....	108
8.8.3.	AVERAGE POWER.....	110
8.8.4.	OUTPUT POWER AND PPSD	111
8.9.	<i>11ac HT80 2TX CDD MIMO MODE IN THE 5.2GHz BAND</i>	<i>114</i>
8.9.1.	26 dB BANDWIDTH	114
8.9.2.	99% BANDWIDTH.....	116
8.9.3.	AVERAGE POWER.....	118
8.9.4.	OUTPUT POWER AND PPSD	119
8.10.	<i>11n HT20 UAT 2 SISO MODE IN THE 5.3GHz BAND</i>	<i>123</i>
8.10.1.	26 dB BANDWIDTH.....	123
8.10.2.	99% BANDWIDTH.....	126
8.10.3.	AVERAGE POWER	129
8.10.4.	OUTPUT POWER AND PPSD.....	130
8.11.	<i>11n HT20 LAT 3 SISO MODE IN THE 5.3GHz BAND</i>	<i>134</i>
8.11.1.	26 dB BANDWIDTH.....	134
8.11.2.	99% BANDWIDTH.....	137
8.11.3.	AVERAGE POWER	140
8.11.4.	OUTPUT POWER AND PPSD.....	141
8.12.	<i>11n HT20 2TX CDD MIMO MODE IN THE 5.3GHz BAND.....</i>	<i>145</i>
8.12.1.	26 dB BANDWIDTH.....	145
8.12.2.	99% BANDWIDTH.....	149
8.12.3.	AVERAGE POWER	153
8.12.4.	OUTPUT POWER AND PPSD.....	154
8.13.	<i>11n HT40 UAT 2 SISO MODE IN THE 5.3GHz BAND</i>	<i>159</i>
8.13.1.	26 dB BANDWIDTH.....	159
8.13.2.	99% BANDWIDTH	161
8.13.3.	AVERAGE POWER	163
8.13.4.	OUTPUT POWER AND PPSD.....	164

8.14.	11n HT40 LAT 3 SISO MODE IN THE 5.3GHz BAND	167
8.14.1.	26 dB BANDWIDTH	167
8.14.2.	99% BANDWIDTH	169
8.14.3.	AVERAGE POWER	171
8.14.4.	OUTPUT POWER AND PPSD.....	172
8.15.	11n HT40 2TX CDD MIMO MODE IN THE 5.3GHz BAND.....	175
8.15.1.	26 dB BANDWIDTH.....	175
8.15.2.	99% BANDWIDTH	178
8.15.3.	AVERAGE POWER	181
8.15.4.	OUTPUT POWER AND PPSD.....	182
8.16.	11ac HT80 UAT 2 SISO MODE IN THE 5.3GHz BAND	186
8.16.1.	26 dB BANDWIDTH	186
8.16.2.	99% BANDWIDTH	188
8.16.3.	AVERAGE POWER	190
8.16.4.	OUTPUT POWER AND PPSD.....	191
8.17.	11ac HT80 LAT 3 SISO MODE IN THE 5.3GHz BAND.....	194
8.17.1.	26 dB BANDWIDTH	194
8.17.2.	99% BANDWIDTH	196
8.17.3.	AVERAGE POWER	198
8.17.4.	OUTPUT POWER AND PPSD.....	199
8.18.	11ac HT80 2TX CDD MIMO MODE IN THE 5.3GHz BAND.....	202
8.18.1.	26 dB BANDWIDTH	202
8.18.2.	99% BANDWIDTH	204
8.18.3.	AVERAGE POWER	206
8.18.4.	OUTPUT POWER AND PPSD.....	207
8.19.	11n HT20 UAT 2 SISO MODE IN THE 5.6GHz BAND.....	210
8.19.1.	26 dB BANDWIDTH	210
8.19.2.	99% BANDWIDTH	213
8.19.3.	AVERAGE POWER	216
8.19.4.	OUTPUT POWER AND PPSD.....	217
8.20.	11ac HT20 UAT 2 SISO STRADDLE CHANNEL 144	221
8.20.1.	OUTPUT POWER AND PPSD.....	221
8.20.2.	6 dB BANDWIDTH.....	225
8.21.	11n HT20 LAT 3 SISO MODE IN THE 5.6GHz BAND	226
8.21.1.	26 dB BANDWIDTH.....	226
8.21.2.	99% BANDWIDTH	229
8.21.3.	AVERAGE POWER	232
8.21.4.	OUTPUT POWER AND PPSD.....	233
8.22.	11ac HT20 LAT 3 SISO STRADDLE CHANNEL 144.....	237
8.22.1.	OUTPUT POWER AND PPSD.....	237
8.22.2.	6 dB BANDWIDTH.....	241
8.23.	11n HT20 2TX CDD MIMO MODE IN THE 5.6GHz BAND.....	242
8.23.1.	26 dB BANDWIDTH.....	242
8.23.2.	99% BANDWIDTH	247
8.23.3.	AVERAGE POWER	252
8.23.4.	OUTPUT POWER AND PPSD.....	253
8.24.	11ac HT20 2TX CDD MIMO STRADDLE CHANNEL 144	259
8.24.1.	OUTPUT POWER AND PPSD.....	259

8.24.2.	6 dB BANDWIDTH.....	265
8.25.	<i>11n HT40 UAT 2 SISO MODE IN THE 5.6GHz BAND.....</i>	<i>267</i>
8.25.1.	26 dB BANDWIDTH.....	267
8.25.2.	99% BANDWIDTH.....	270
8.25.3.	AVERAGE POWER.....	273
8.25.4.	OUTPUT POWER AND PPSD.....	274
8.26.	<i>11ac HT40 UAT 2 SISO STRADDLE CHANNEL 142.....</i>	<i>278</i>
8.26.1.	OUTPUT POWER AND PPSD.....	278
8.26.2.	6 dB BANDWIDTH.....	282
8.27.	<i>11n HT40 LAT 3 SISO MODE IN THE 5.6GHz BAND.....</i>	<i>283</i>
8.27.1.	26 dB BANDWIDTH.....	283
8.27.2.	99% BANDWIDTH.....	286
8.27.3.	AVERAGE POWER.....	289
8.27.4.	OUTPUT POWER AND PPSD.....	290
8.28.	<i>11ac HT40 LAT 3 SISO STRADDLE CHANNEL 142.....</i>	<i>294</i>
8.28.1.	OUTPUT POWER AND PPSD.....	294
8.28.2.	6 dB BANDWIDTH.....	298
8.29.	<i>11n HT40 2TX CDD MIMO MODE IN THE 5.6GHz BAND.....</i>	<i>299</i>
8.29.1.	26 dB BANDWIDTH.....	299
8.29.2.	99% BANDWIDTH.....	304
8.29.3.	AVERAGE POWER.....	309
8.29.4.	OUTPUT POWER AND PPSD.....	310
8.30.	<i>11ac HT40 2TX CDD MIMO STRADDLE CHANNEL 142.....</i>	<i>316</i>
8.30.1.	OUTPUT POWER AND PPSD.....	316
8.30.2.	6 dB BANDWIDTH.....	322
8.31.	<i>11ac HT80 UAT 2 SISO MODE IN THE 5.6GHz BAND.....</i>	<i>324</i>
8.31.1.	26 dB BANDWIDTH.....	324
8.31.2.	99% BANDWIDTH.....	327
8.31.3.	AVERAGE POWER.....	330
8.31.4.	OUTPUT POWER AND PPSD.....	331
8.31.5.	STRADDLE CHANNEL 138 RESULTS.....	334
8.31.6.	6 dB BANDWIDTH.....	338
8.32.	<i>11ac HT80 LAT 3 SISO MODE IN THE 5.6GHz BAND.....</i>	<i>339</i>
8.32.1.	26 dB BANDWIDTH.....	339
8.32.2.	99% BANDWIDTH.....	342
8.32.3.	AVERAGE POWER.....	345
8.32.4.	OUTPUT POWER AND PPSD.....	346
8.32.5.	STRADDLE CHANNEL 138 RESULTS.....	349
8.32.6.	6 dB BANDWIDTH.....	353
8.33.	<i>11ac HT80 2TX CDD MIMO MODE IN THE 5.6GHz BAND.....</i>	<i>354</i>
8.33.1.	26 dB BANDWIDTH.....	354
8.33.2.	99% BANDWIDTH.....	358
8.33.3.	AVERAGE POWER.....	362
8.33.4.	OUTPUT POWER AND PPSD.....	363
8.33.5.	STRADDLE CHANNEL 138 RESULTS.....	368
8.33.6.	6 dB BANDWIDTH.....	374
8.34.	<i>11n HT20 UAT 2 SISO MODE IN THE 5.8GHz BAND.....</i>	<i>376</i>
8.34.1.	6 dB BANDWIDTH.....	376

8.34.2.	26 dB BANDWIDTH	379
8.34.3.	99% BANDWIDTH	382
8.34.4.	AVERAGE POWER	385
8.34.5.	OUTPUT POWER.....	386
8.34.6.	POWER SPECTRAL DENSITY	388
8.35.	<i>11n HT20 LAT 3 SISO MODE IN THE 5.8GHz BAND</i>	<i>392</i>
8.35.1.	6 dB BANDWIDTH.....	392
8.35.2.	26 dB BANDWIDTH	395
8.35.3.	99% BANDWIDTH	398
8.35.4.	AVERAGE POWER	401
8.35.5.	OUTPUT POWER.....	402
8.35.6.	POWER SPECTRAL DENSITY	404
8.36.	<i>11n HT20 2TX CDD MIMO MODE IN THE 5.8GHz BAND.....</i>	<i>408</i>
8.36.1.	6 dB BANDWIDTH.....	408
8.36.2.	26 dB BANDWIDTH	412
8.36.3.	99% BANDWIDTH	416
8.36.4.	AVERAGE POWER	420
8.36.5.	OUTPUT POWER.....	421
8.36.6.	POWER SPECTRAL DENSITY	423
8.37.	<i>11n HT40 UAT 2 SISO MODE IN THE 5.8GHz BAND</i>	<i>428</i>
8.37.1.	6 dB BANDWIDTH.....	428
8.37.2.	26 dB BANDWIDTH	430
8.37.3.	99% BANDWIDTH	432
8.37.4.	AVERAGE POWER	434
8.37.5.	OUTPUT POWER.....	435
8.37.6.	POWER SPECTRAL DENSITY	437
8.38.	<i>11n HT40 LAT 3 SISO MODE IN THE 5.8GHz BAND</i>	<i>440</i>
8.38.1.	6 dB BANDWIDTH.....	440
8.38.2.	26 dB BANDWIDTH	442
8.38.3.	99% BANDWIDTH	444
8.38.4.	AVERAGE POWER	446
8.38.5.	OUTPUT POWER.....	447
8.38.6.	POWER SPECTRAL DENSITY	449
8.39.	<i>11n HT40 2TX CDD MIMO MODE IN THE 5.8GHz BAND.....</i>	<i>452</i>
8.39.1.	6 dB BANDWIDTH.....	452
8.39.2.	26 dB BANDWIDTH	455
8.39.3.	99% BANDWIDTH	458
8.39.4.	AVERAGE POWER	461
8.39.5.	OUTPUT POWER.....	462
8.39.6.	POWER SPECTRAL DENSITY	464
8.40.	<i>11ac HT80 UAT 2 SISO MODE IN THE 5.8GHz BAND</i>	<i>468</i>
8.40.1.	6 dB BANDWIDTH.....	468
8.40.2.	26 dB BANDWIDTH	470
8.40.3.	99% BANDWIDTH	472
8.40.4.	AVERAGE POWER	474
8.40.5.	OUTPUT POWER.....	475
8.40.6.	POWER SPECTRAL DENSITY	477
8.41.	<i>11ac HT80 LAT 3 SISO MODE IN THE 5.8GHz BAND.....</i>	<i>480</i>
8.41.1.	6 dB BANDWIDTH.....	480
8.41.2.	26 dB BANDWIDTH	482

8.41.3.	99% BANDWIDTH	484
8.41.4.	AVERAGE POWER	486
8.41.5.	OUTPUT POWER.....	487
8.41.6.	POWER SPECTRAL DENSITY	489
8.42.	<i>11ac HT80 2TX CDD MIMO MODE IN THE 5.8GHz BAND</i>	492
8.42.1.	6 dB BANDWIDTH.....	492
8.42.2.	26 dB BANDWIDTH.....	494
8.42.3.	99% BANDWIDTH	496
8.42.4.	AVERAGE POWER	498
8.42.5.	OUTPUT POWER.....	499
8.42.6.	POWER SPECTRAL DENSITY	501
9.	RADIATED TEST RESULTS	504
9.1.	<i>TRANSMITTER ABOVE 1GHZ</i>	505
9.1.1.	11n HT20 UAT 2 SISO MODE IN THE 5.2GHz BAND	505
9.1.2.	11n HT20 LAT 3 SISO MODE IN THE 5.2GHz BAND.....	507
9.1.3.	11n HT20 2TX CDD MIMO MODE IN THE 5.2GHz BAND	509
9.1.4.	11n HT40 UAT 2 SISO MODE IN THE 5.2GHz BAND	517
9.1.5.	11n HT40 LAT 3 SISO MODE IN THE 5.2GHz BAND.....	519
9.1.6.	11n HT40 2TX CDD MIMO MODE IN THE 5.2GHz BAND	521
9.1.7.	11ac HT80 UAT 2 SISO MODE IN THE 5.2GHz BAND	527
9.1.8.	11ac HT80 LAT 3 SISO MODE IN THE 5.2GHz BAND	529
9.1.9.	11ac HT80 2TX CDD MIMO MODE IN THE 5.2GHz BAND	531
9.1.10.	11n HT20 UAT 2 SISO MODE IN THE 5.3GHz BAND.....	535
9.1.11.	11n HT20 LAT 3 SISO MODE IN THE 5.3GHz BAND	537
9.1.12.	11n HT20 2TX CDD MIMO MODE IN THE 5.3GHz BAND	539
9.1.13.	11n HT40 UAT 2 SISO MODE IN THE 5.3GHz BAND.....	547
9.1.14.	11n HT40 LAT 3 SISO MODE IN THE 5.3GHz BAND	549
9.1.15.	11n HT40 2TX CDD MIMO MODE IN THE 5.3GHz BAND	551
9.1.16.	11ac HT80 UAT 2 SISO MODE IN THE 5.3GHz BAND	557
9.1.17.	11ac HT80 LAT 3 SISO MODE IN THE 5.3GHz BAND.....	559
9.1.18.	11ac HT80 2TX CDD MIMO MODE IN THE 5.3GHz BAND.....	561
9.1.19.	11n HT20 UAT 2 SISO MODE IN THE 5.6GHz BAND.....	565
9.1.20.	11n HT20 LAT 3 SISO MODE IN THE 5.6GHz BAND	569
9.1.21.	11n HT20 2TX CDD MIMO MODE IN THE 5.6GHz BAND	573
9.1.22.	11n HT20 2TX CDD MIMO STRADDLE CHANNEL 144.....	583
9.1.23.	11n HT40 UAT 2 SISO MODE IN THE 5.6GHz BAND.....	585
9.1.24.	11n HT40 LAT 3 SISO MODE IN THE 5.6GHz BAND	589
9.1.25.	11n HT40 2TX CDD MIMO MODE IN THE 5.6GHz BAND	593
9.1.26.	11n HT40 2TX CDD MIMO STRADDLE CHANNEL 142.....	603
9.1.27.	11ac HT80 UAT 2 SISO MODE IN THE 5.6GHz BAND	605
9.1.28.	11ac HT80 LAT 3 SISO MODE IN THE 5.6GHz BAND.....	607
9.1.29.	11ac HT80 2TX CDD MIMO MODE IN THE 5.6GHz BAND.....	609
9.1.30.	11ac HT80 2TX CDD MIMO STRADDLE CHANNEL 138.....	615
9.1.31.	11n HT20 UAT 2 SISO MODE IN THE 5.8GHz BAND.....	617
9.1.32.	11n HT20 LAT 3 SISO MODE IN THE 5.8GHz BAND	621
9.1.33.	11n HT20 2TX CDD MIMO MODE IN THE 5.8GHz BAND	625
9.1.34.	11n HT40 UAT 2 SISO MODE IN THE 5.8GHz BAND.....	635
9.1.35.	11n HT40 LAT 3 SISO MODE IN THE 5.8GHz BAND	639
9.1.36.	11n HT40 2TX CDD MIMO MODE IN THE 5.8GHz BAND	643
9.1.37.	11ac HT80 UAT 2 SISO MODE IN THE 5.8GHz BAND.....	651
9.1.38.	11ac HT80 LAT 3 SISO MODE IN THE 5.8GHz BAND.....	655

9.1.39.	11ac HT80 2TX CDD MIMO MODE IN THE 5.8GHz BAND	659
9.2.	WORST-CASE BELOW 1 GHz	665
9.3.	WORST-CASE 18 to 26 GHz	667
9.4.	WORST-CASE 26 to 40 GHz	669
10.	AC POWER LINE CONDUCTED EMISSIONS	671
10.1.	EUT POWERED BY AC/DC ADAPTER VIA USB CABLE	672
10.2.	EUT POWERED BY HOST PC VIA USB CABLE	674
11.	DYNAMIC FREQUENCY SELECTION.....	676
11.1.	OVERVIEW	676
11.1.1.	LIMITS	676
11.1.2.	TEST AND MEASUREMENT SYSTEM	680
11.1.3.	TEST ROOM ENVIRONMENT	682
11.1.4.	TEST AND MEASUREMENT SOFTWARE.....	682
11.1.5.	SETUP OF EUT (CLIENT MODE)	683
11.1.6.	SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE).....	684
11.1.7.	SETUP OF EUT (PEER TO PEER MODE).....	685
11.1.8.	DESCRIPTION OF EUT	687
11.2.	CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH	689
11.2.1.	TEST CHANNEL.....	689
11.2.2.	RADAR WAVEFORM AND TRAFFIC	689
11.2.3.	OVERLAPPING CHANNEL TESTS.....	692
11.2.4.	MOVE AND CLOSING TIME	692
11.3.	CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH	696
11.3.1.	TEST CHANNEL.....	696
11.3.2.	RADAR WAVEFORM AND TRAFFIC	696
11.3.3.	OVERLAPPING CHANNEL TESTS.....	699
11.3.4.	MOVE AND CLOSING TIME	699
11.4.	CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH	703
11.4.1.	TEST CHANNEL.....	703
11.4.2.	RADAR WAVEFORM AND TRAFFIC	703
11.4.3.	OVERLAPPING CHANNEL TESTS.....	706
11.4.4.	MOVE AND CLOSING TIME	706
11.4.5.	30-MINUTE NON-OCCUPANCY PERIOD.....	710
11.5.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH 711	
11.5.1.	TEST CHANNEL.....	711
11.5.2.	RADAR WAVEFORM AND TRAFFIC	711
11.5.3.	OVERLAPPING CHANNEL TESTS.....	714
11.5.4.	MOVE AND CLOSING TIME	714
11.6.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH 718	
11.6.1.	TEST CHANNEL.....	718
11.6.2.	RADAR WAVEFORM AND TRAFFIC	718
11.6.3.	OVERLAPPING CHANNEL TESTS.....	721
11.6.4.	MOVE AND CLOSING TIME	721

11.7.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH	725
11.7.1.	TEST CHANNEL.....	725
11.7.2.	RADAR WAVEFORM AND TRAFFIC	725
11.7.3.	OVERLAPPING CHANNEL TESTS	728
11.7.4.	MOVE AND CLOSING TIME	728
11.7.5.	30-MINUTE NON-OCCUPANCY PERIOD.....	732
11.8.	PEER TO PEER MODE EUT RESULTS FOR 20 MHz BANDWIDTH.....	733
11.8.1.	TEST CHANNEL.....	733
11.8.2.	RADAR WAVEFORM AND TRAFFIC	733
11.8.3.	OVERLAPPING CHANNEL TESTS	736
11.8.4.	MOVE AND CLOSING TIME	736
11.9.	PEER TO PEER MODE EUT RESULTS FOR 40 MHz BANDWIDTH.....	740
11.9.1.	TEST CHANNEL.....	740
11.9.2.	RADAR WAVEFORM AND TRAFFIC	740
11.9.3.	OVERLAPPING CHANNEL TESTS	743
11.9.4.	MOVE AND CLOSING TIME	743
11.10.	PEER TO PEER MODE EUT RESULTS FOR 80 MHz BANDWIDTH.....	747
11.10.1.	TEST CHANNEL.....	747
11.10.2.	RADAR WAVEFORM AND TRAFFIC	747
11.10.3.	OVERLAPPING CHANNEL TESTS	750
11.10.4.	MOVE AND CLOSING TIME	750
11.10.5.	30-MINUTE NON-OCCUPANCY PERIOD.....	754
11.11.	PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 20 MHz BANDWIDTH	755
11.11.1.	TEST CHANNEL.....	755
11.11.2.	RADAR WAVEFORM AND TRAFFIC	755
11.11.3.	OVERLAPPING CHANNEL TESTS	758
11.11.4.	MOVE AND CLOSING TIME	758
11.12.	PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 40 MHz BANDWIDTH	762
11.12.1.	TEST CHANNEL.....	762
11.12.2.	RADAR WAVEFORM AND TRAFFIC	762
11.12.3.	OVERLAPPING CHANNEL TESTS	765
11.12.4.	MOVE AND CLOSING TIME	765
11.13.	PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 80 MHz BANDWIDTH	769
11.13.1.	TEST CHANNEL.....	769
11.13.2.	RADAR WAVEFORM AND TRAFFIC	769
11.13.3.	OVERLAPPING CHANNEL TESTS	772
11.13.4.	MOVE AND CLOSING TIME	772
11.13.5.	30-MINUTE NON-OCCUPANCY PERIOD.....	776
11.14.	PEER TO PEER MODE EUT RESULTS FOR 20 MHz BANDWIDTH.....	777
11.14.1.	TEST CHANNEL.....	777
11.14.2.	RADAR WAVEFORM AND TRAFFIC	777
11.14.3.	OVERLAPPING CHANNEL TESTS	780
11.14.4.	MOVE AND CLOSING TIME	780
11.15.	PEER TO PEER MODE EUT RESULTS FOR 40 MHz BANDWIDTH.....	784
11.15.1.	TEST CHANNEL.....	784
11.15.2.	RADAR WAVEFORM AND TRAFFIC	784
11.15.3.	OVERLAPPING CHANNEL TESTS	787
11.15.4.	MOVE AND CLOSING TIME	787

11.16.	PEER TO PEER MODE EUT RESULTS FOR 80 MHz BANDWIDTH.....	791
11.16.1.	TEST CHANNEL.....	791
11.16.2.	RADAR WAVEFORM AND TRAFFIC	791
11.16.3.	OVERLAPPING CHANNEL TESTS.....	794
11.16.4.	MOVE AND CLOSING TIME	794
11.16.5.	30-MINUTE NON-OCCUPANCY PERIOD.....	798
11.17.	PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 20 MHz BANDWIDTH	799
11.17.1.	TEST CHANNEL.....	799
11.17.2.	RADAR WAVEFORM AND TRAFFIC	799
11.17.3.	OVERLAPPING CHANNEL TESTS.....	802
11.17.4.	MOVE AND CLOSING TIME	802
11.18.	PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 40 MHz BANDWIDTH	806
11.18.1.	TEST CHANNEL.....	806
11.18.2.	RADAR WAVEFORM AND TRAFFIC	806
11.18.3.	OVERLAPPING CHANNEL TESTS.....	809
11.18.4.	MOVE AND CLOSING TIME	809
11.19.	PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 80 MHz BANDWIDTH	813
11.19.1.	TEST CHANNEL.....	813
11.19.2.	RADAR WAVEFORM AND TRAFFIC	813
11.19.3.	OVERLAPPING CHANNEL TESTS.....	816
11.19.4.	MOVE AND CLOSING TIME	816
11.19.5.	30-MINUTE NON-OCCUPANCY PERIOD.....	820
12.	SETUP PHOTOS.....	821

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A1865, A1903

SERIAL NUMBER: C39TX02KJ8PT; C39TN01VJ56Y (DFS)

DATE TESTED: MAY 18, 2017 – AUGUST 09, 2017


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:



Mengistu Mekuria
Senior Engineer
UL VERIFICATION SERVICES INC.

Tri Pham
Test Engineer
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

FCC: The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v02/D03 v01r02/D04 v01/D06 v02/ D07v02, FCC KDB 789033 D02 v01r04, FCC KDB 644545 D03 v01, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (IC:2324B-1)	☒ Chamber D (IC: 22541-1)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC: 22541-2)
☐ Chamber C (IC:2324B-3)	☒ Chamber F (IC: 22541-3)
	☐ Chamber G (IC: 22541-4)
	☒ Chamber H (IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB
Occupied Channel Bandwidth	±0.39 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Equipment under Test is a mobile phone with GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA and CDMA technologies. It also supports IEEE 802.11a/b/g/n/ac, Bluetooth®, GPS and NFC. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

NOTE: Covered modes are test reduction modes. The output powers on the “covered modes are equal to or less than the mode referenced and use the same modulation.

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	20.86	121.90
	802.11n VHT20 1TX	Covered by 802.11n HT20 SISO	
	802.11n HT20 CDD 2TX	20.91	123.31
	802.11n HT20 STBC/SDM 2TX, 802.11ac VHT20 STBC/SDM 2TX	Covered by 802.11n HT20 2TX CDD	
5190 - 5230	802.11n HT40 SISO	19.46	88.31
	802.11n VHT40 1TX	Covered by 802.11n HT40 SISO	
	802.11n HT40 CDD 2TX	22.41	174.18
	802.11n HT40 STBC/SDM 2TX, 802.11ac VHT40 STBC/SDM 2TX	Covered by 802.11n HT40 2TX CDD	
5210	802.11ac VHT80 SISO	17.46	55.72
	802.11ac VHT80 CDD 2TX	19.41	87.30
	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac VHT80 2TX CDD	

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	20.95	124.45
	802.11n VHT20 1TX	Covered by 802.11n HT20 SISO	
	802.11n HT20 CDD 2TX	20.92	123.59
	802.11n HT20 STBC/SDM 2TX, 802.11ac VHT20 STBC/SDM 2TX	Covered by 802.11n HT20 2TX CDD	
5270 - 5310	802.11n HT40 SISO	19.45	88.10
	802.11n VHT40 1TX	Covered by 802.11n HT40 SISO	
	802.11n HT40 CDD 2TX	22.43	174.98
	802.11n HT40 STBC/SDM 2TX, 802.11ac VHT40 STBC/SDM 2TX	Covered by 802.11n HT40 2TX CDD	
5290	802.11ac VHT80 SISO	17.42	55.21
	802.11ac VHT80 CDD 2TX	19.42	87.50
	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac HT80 2TX CDD	

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
5500 - 5700	802.11n HT20 SISO	20.82	120.78
	802.11n VHT20 1TX	Covered by 802.11n HT20 SISO	
5720	802.11ac VHT20 SISO (based on UNII-2C band output power)	20.32	107.65
5500 - 5700	802.11n HT20 CDD 2TX	20.92	123.59
	802.11n HT20 STBC/SDM 2TX, 802.11ac VHT20 STBC/SDM 2TX	Covered by 802.11n HT20 CDD 2TX	
5720	802.11ac VHT20 CDD 2TX (based on UNII-2C band output power)	20.00	100.00
	802.11ac VHT20 STBC SISO/2TX (based on UNII-2C band output power)	Covered by 802.11n HT20 2TX CDD	
5510 - 5670	802.11n HT40 SISO	19.42	87.50
	802.11n HT40 1TX	Covered by 802.11n HT40 SISO	
5710	802.11ac VHT40 SISO (based on UNII-2C band output power)	18.92	77.98
5510 - 5670	802.11n HT40 CDD 2TX	22.43	174.98
	802.11n HT40 STBC/SDM 2TX, 802.11ac VHT40 STBC/SDM 2TX	Covered by 802.11n HT40 CDD 2TX	
5710	802.11ac VHT40 CDD 2TX (based on UNII-2C band output power)	22.20	165.96
	802.11ac VHT40 STBC/SDM 2TX	Covered by 802.11ac VHT40 CDD 2TX	
5530-5610	802.11ac VHT80 SISO	19.35	86.10
5690	802.11ac VHT80 SISO (based on UNII-2C band output power)	18.92	77.98
5530-5610	802.11ac VHT80 CDD 2TX	22.43	174.98
	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac VHT80 CDD 2TX	
5690	802.11ac VHT80 CDD 2TX (based on UNII-2C band output power)	21.65	146.22
	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac VHT80 CDD 2TX	

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	21.43	139.00
	802.11n VHT20 1TX	Covered by 802.11n HT20 SISO	
	802.11n HT20 CDD 2TX	24.48	280.54
	802.11n HT20 STBC/SDM 2TX, 802.11ac VHT20 STBC/SDM 2TX	Covered by 802.11n HT20 CDD 2TX	
5755 - 5795	802.11n HT40 SISO	19.43	87.70
	802.11n VHT40 1TX	Covered by 802.11n HT40 SISO	
	802.11n HT40 CDD 2TX	22.45	175.79
	802.11n HT40 STBC/SDM 2TX, 802.11ac VHT40 STBC/SDM 2TX	Covered by 802.11n HT40 CDD 2TX	
5775	802.11ac VHT80 SISO	19.44	87.90
	802.11ac VHT80 CDD 2TX	22.42	174.58
	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac VHT80 CDD 2TX	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	UAT 2	LAT 3
5.2	-2.72	-7.51
5.3	-3.27	-6.98
5.5	-2.77	-6.89
5.8	-3.57	-6.31

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was version 13.10.452.12

5.5. WORST-CASE CONFIGURATION AND MODE

For radiated harmonics spurious below 1GHz, 1-18GHz L/M/H channels, 18-40GHz, and power line conducted emissions were performed with the EUT set at the CDD mode among the CDD/STBC/SDM modes with power setting equal or higher than SISO modes as worst-case scenario.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, above 18GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario.

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either UAT 2 or LAT 3. Both antenna ports have the same power; output power and PSD measurement for SISO modes on both antennas are reported. For MIMO modes, both UAT 2 and LAT 3 used at the same time.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), on both UAT 2 and LAT 3 antennas. In addition, the EUT was also investigated with and without AC/DC charger, headphones & laptop, It was determined that (see table below) was worst-case orientation for both antennas without AC/DC charger, headphones, or laptop; therefore, all final radiated testing was performed with EUT only in (see table below) orientation for 1 - 18GHz and 18 – 40GHz. EUT was tested with AC/DC charger for 30MHz – 1000MHz testing.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2-5.8	1TX SISO	UAT 2	Y-Landscape
		LAT 3	Y-Landscape
	2TX MIMO	UAT 2 + LAT 3	Y-Landscape

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in the 2.4GHz BT/BLE and 5GHz bands, tests were conducted for various configurations having the highest power. No noticeable new emission was found.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop AC/DC adapter	Apple	A1344	T1580	NA
Laptop	Apple	A1278	C02HJ0A7DTY4	NA
DC power supply	Lambda	GEN 60-25	SCPV56329	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Shielded	1	N/A
2	USB	1	USB	Shielded	1	Laptop to EUT
3	AC	1	AC	Un-shielded	3	N/A
4	Aligator clip	1	minigrabber	Un-Shielded	1	DC power supply to EUT

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
NA						

I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A


I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A
2	USB	1	USB	Shielded	1	N/A

TEST SETUP

The EUT was tested connected to a host Laptop via USB cable adapter and SMA cable connected to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

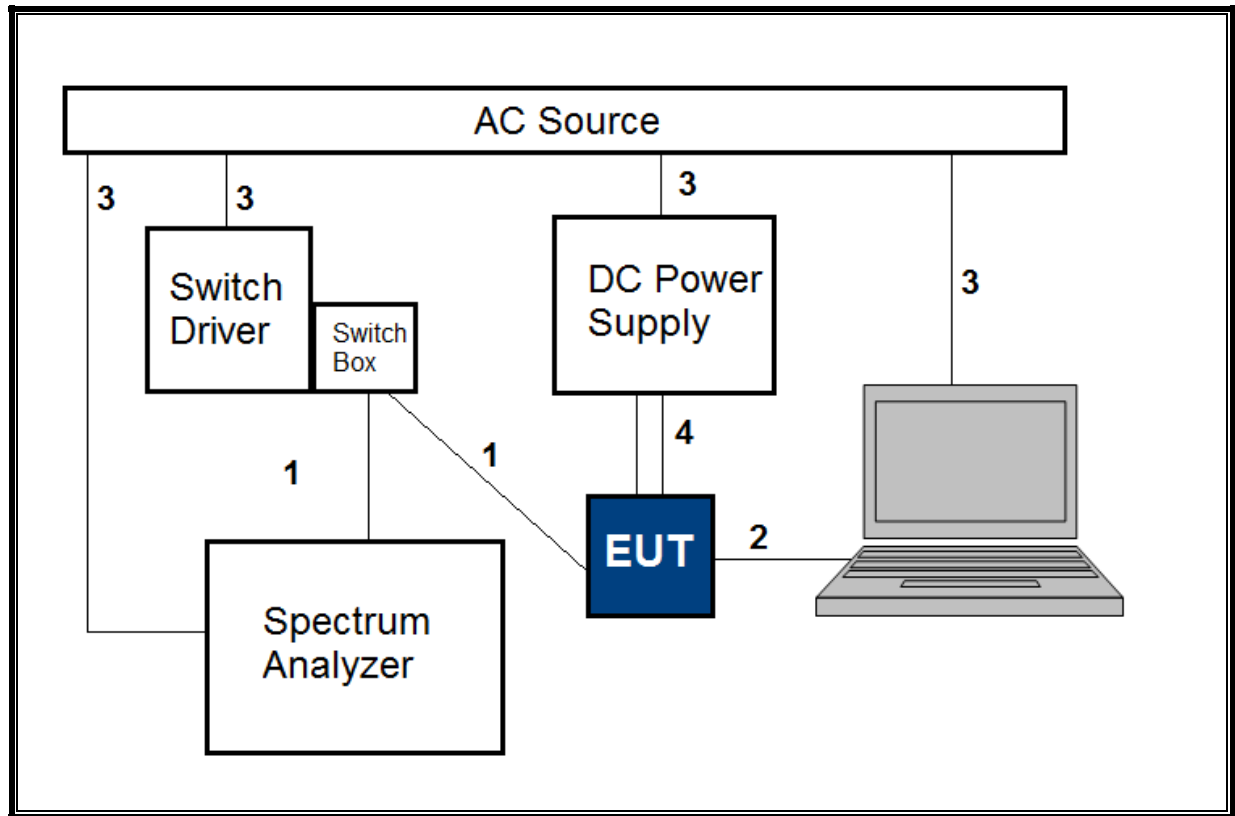

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.


SETUP DIAGRAM

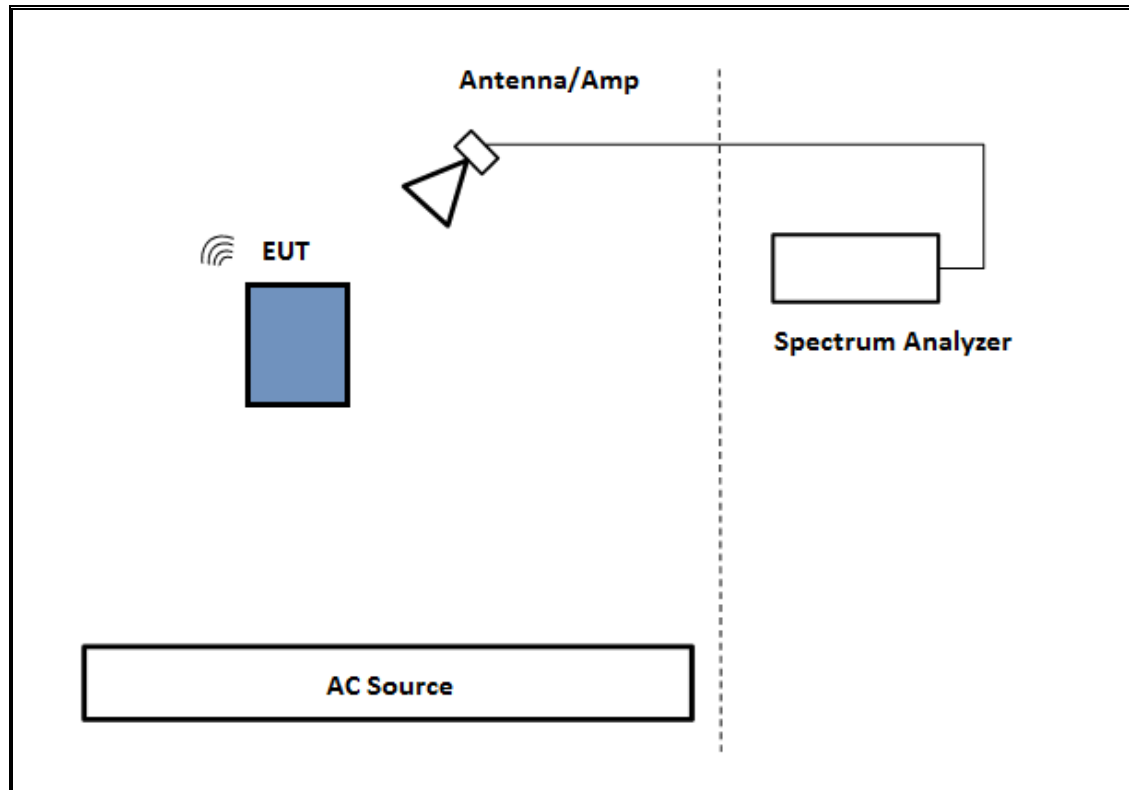

TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS

The EUT was powered by AC/DC adapter. Test software exercised the EUT.


SETUP DIAGRAM

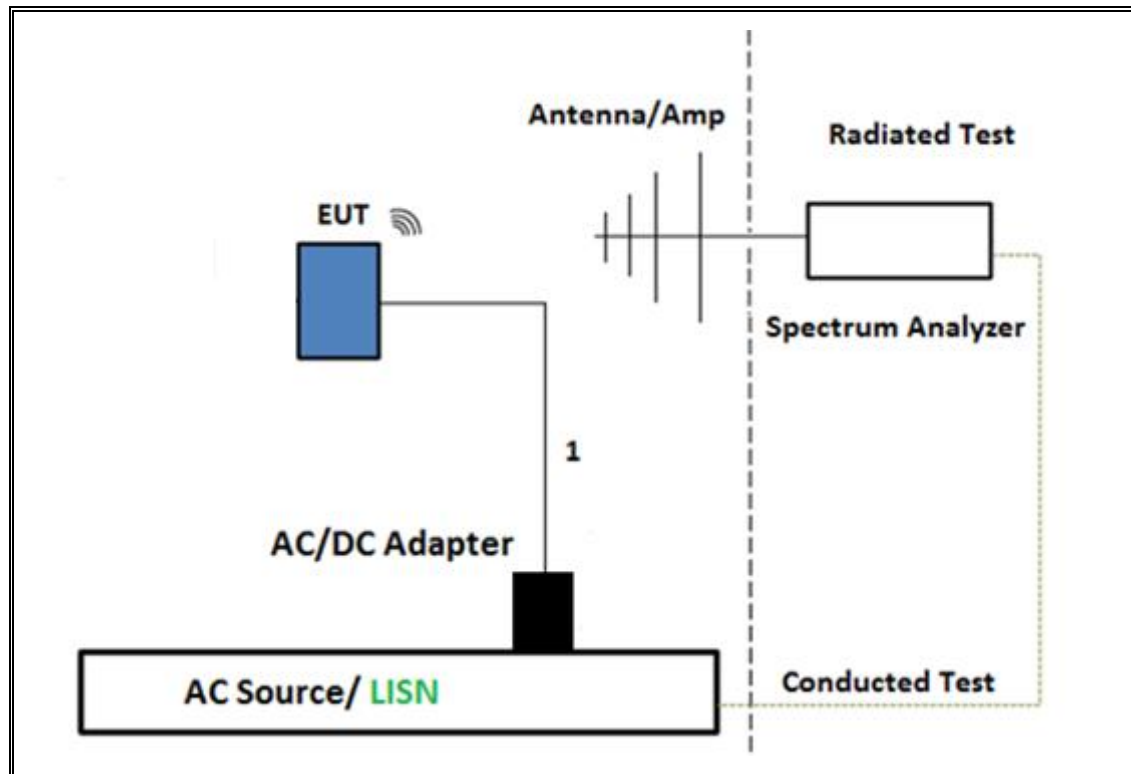

TEST SETUP- AC LINE CONDUCTED TEST (LAPTOP CONFIGURATION)

The EUT was tested connected to a host Laptop via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

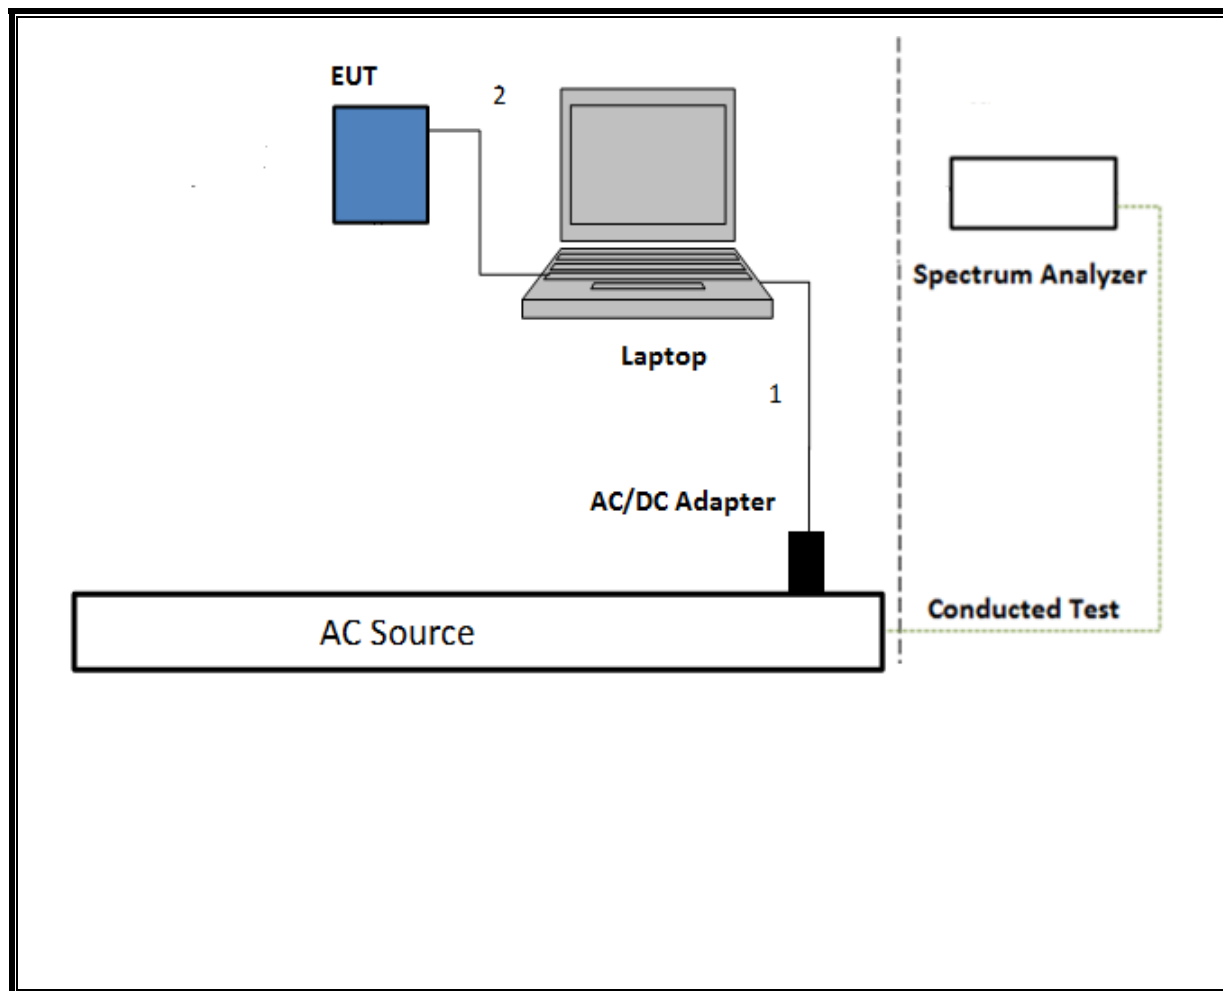

6. TEST AND MEASUREMENT EQUIPMENT

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T711	1/30/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	11/29/17
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	12/14/2017
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T863	6/9/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T741	11/29/2017
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	3/28/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T742	11/29/2017
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T742	11/29/2017
Spectrum Analyzer, PSA, 3Hz to 44GHz	Agilent (Keysight) Technologies	E4446A	T177	03/20/2018
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T344	4/20/2018
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	T185	3/30/2018
Amplifier, 1 to 18GHz, 35dB	Amplical	AMP1G18-35	T1569	9/15/2017
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T835	6/18/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1613	12/2/2017
Spectrum Analyzer, 40GHz	Agilent	8564E	T106	9/7/2017
*Antenna, Horn 26.5GHz to 40GHz	ARA	MWH-2640/B	T446	6/12/2017
Amplifier, 26.5GHz to 40GHz	Miteq	NSP 4000 SP2	T88	4/29/2018
Horn Antenna, 40GHz	ARA	MWH-2640/B	1029	8/19/2017
*Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	7/5/2017
Power Meter, P-series single channel	Keysight	N1912A	T1245	1/05/2018
Power Sensor	Keysight	N1921A	T1224	1/31/2018
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	T1436	01/06/2018
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/08/2017
Power Cable, Line Conducted Emissions	UL	PG1	T861	9/1/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

The following test and measurement equipment was utilized for the tests documented in this report:

NOTE: *testing is completed before equipment calibration expiration date.

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

7.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.



RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.920	1.941	0.989	98.92%	0.00	0.010
802.11n HT20 CDD 2TX	1.920	1.941	0.989	98.92%	0.00	0.010
802.11n HT40 1TX	0.944	0.966	0.978	97.79%	0.10	1.059
802.11n HT40 CDD 2TX	0.944	0.965	0.978	97.83%	0.10	1.059
802.11ac VHT80 1TX	0.460	0.481	0.957	95.66%	0.19	2.173
802.11ac VHT80 CDD 2TX	0.460	0.481	0.957	95.65%	0.19	2.174

DUTY CYCLE PLOTS

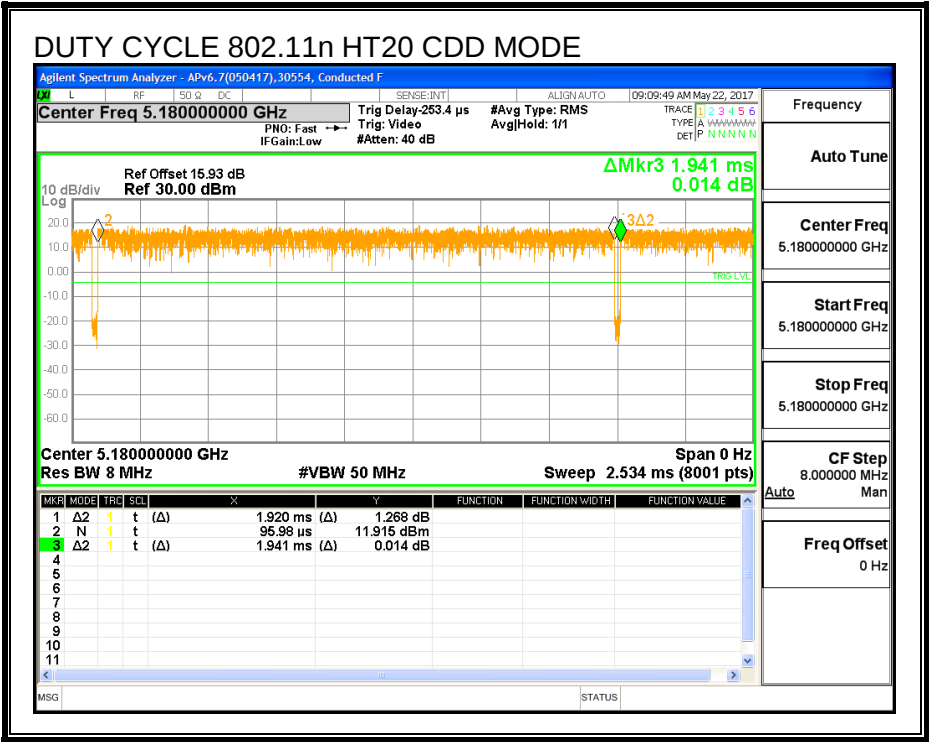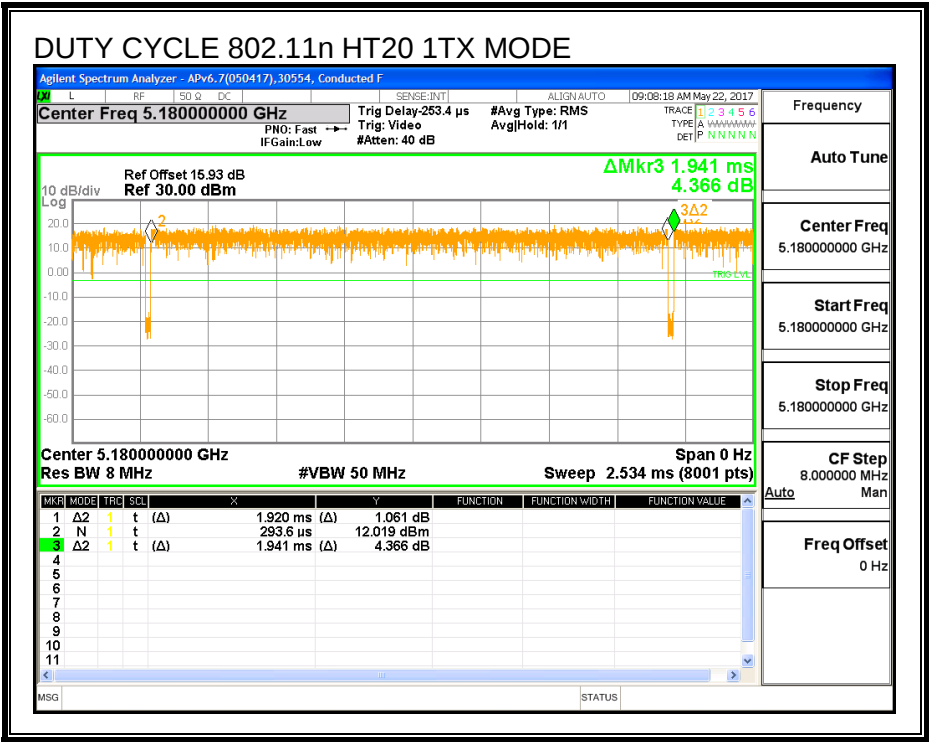

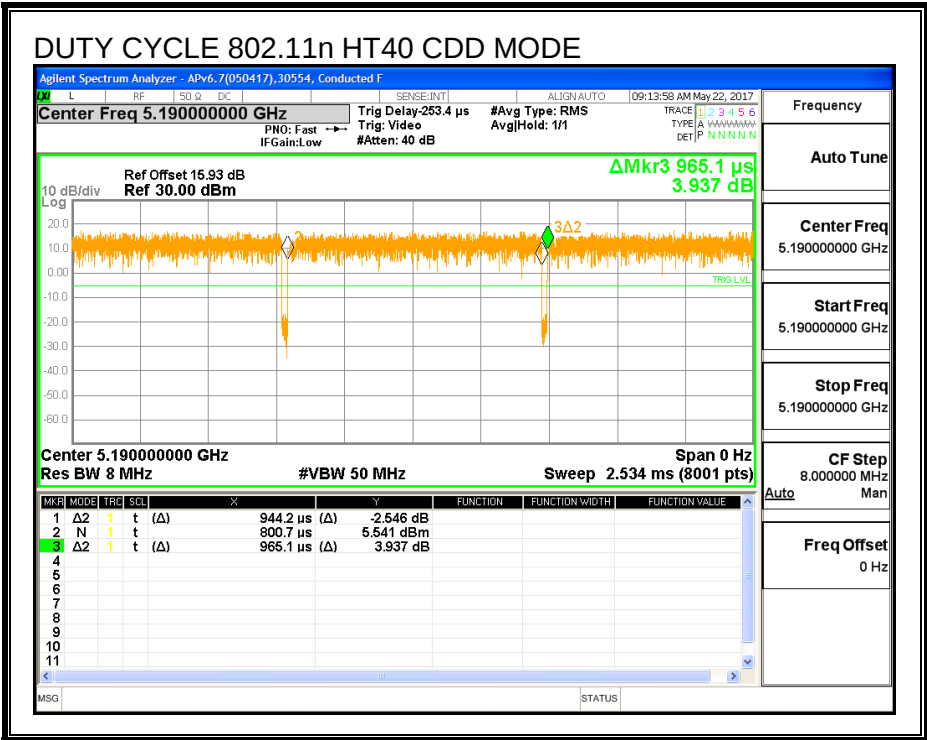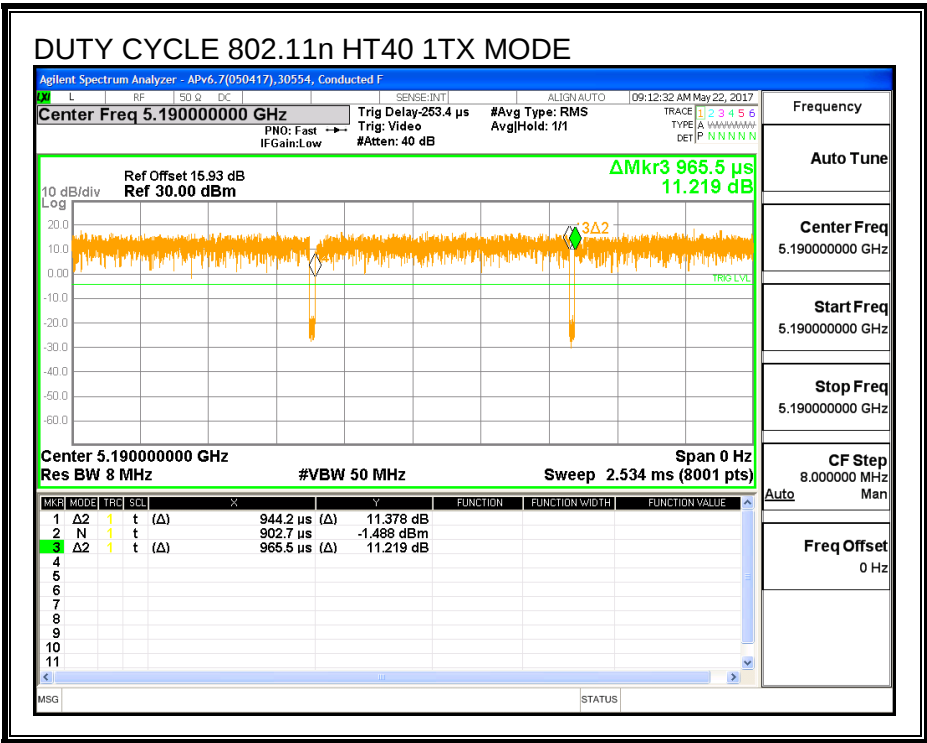

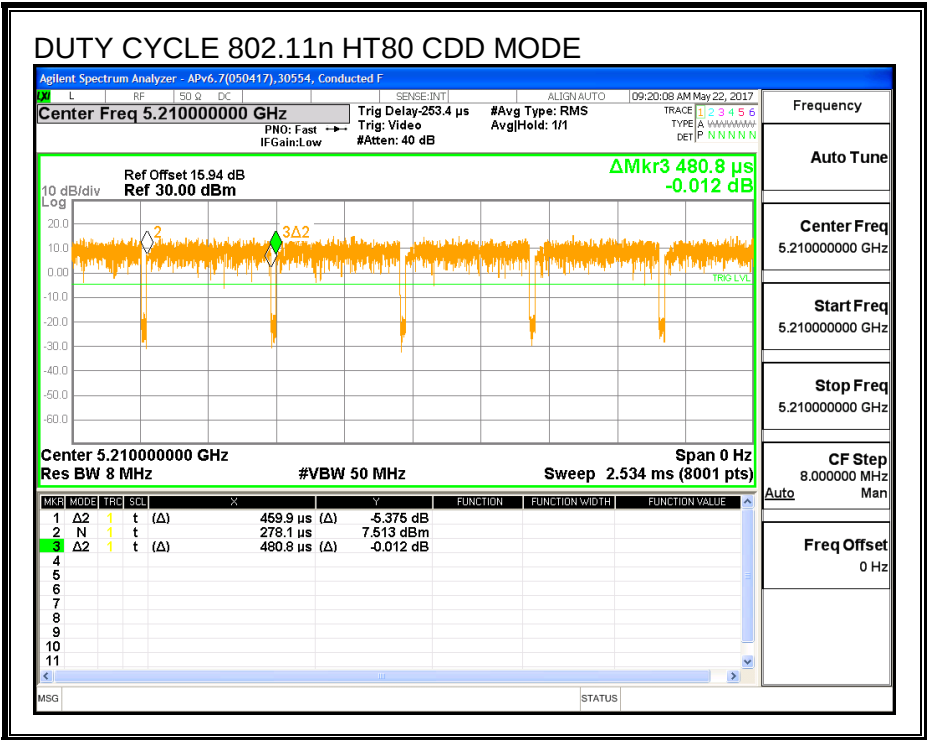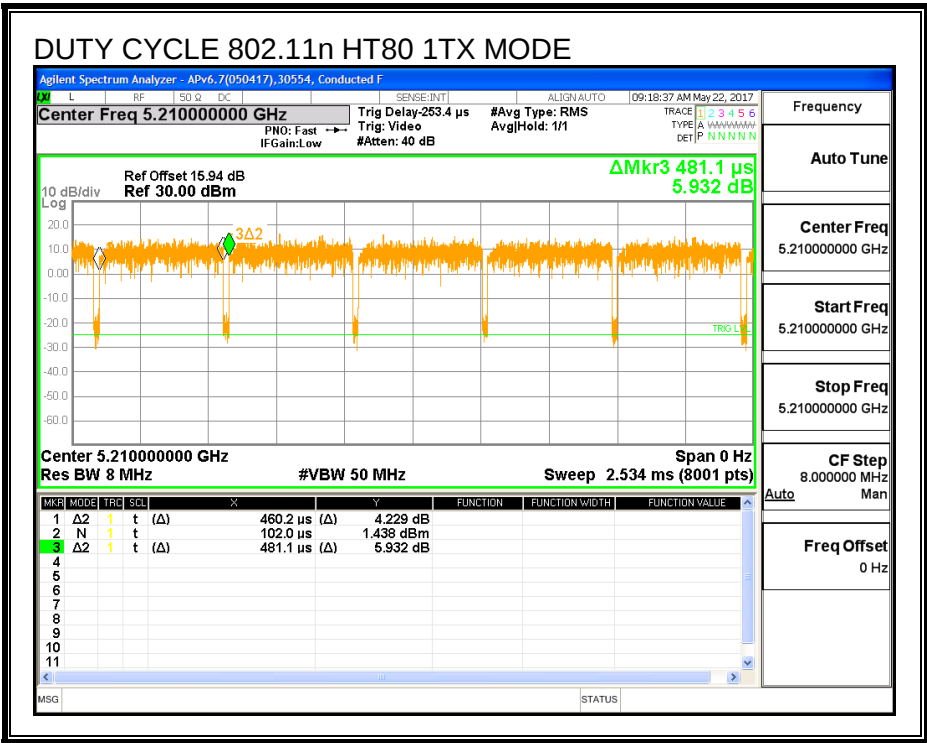

7.2. MEASUREMENT METHODS

6 dB Emission BW: KDB 789033 D02 v01r04, Section C.

26 dB Emission BW: KDB 789033 D02 v01r04, Section C.

99% Occupied BW: KDB 789033 D02 v01r04, Section D.

Conducted Output Power: KDB 789033 D02 v01r04, Section E.3.b (Method PM-G).

Power Spectral Density: KDB 789033 D02 v01r04, Section F (Method SA-2).

Unwanted emissions in restricted bands: KDB 789033 D02 v01r04, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01r04, Sections G.3, G.4, and G.5.

AC Power line conducted emissions: C63.10, Clause 6.2

8. ANTENNA PORT TEST RESULTS

8.1. 11n HT20 UAT 2 SISO MODE IN THE 5.2GHz BAND



8.1.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5180	22.05
Mid	5200	21.80
High	5240	22.00

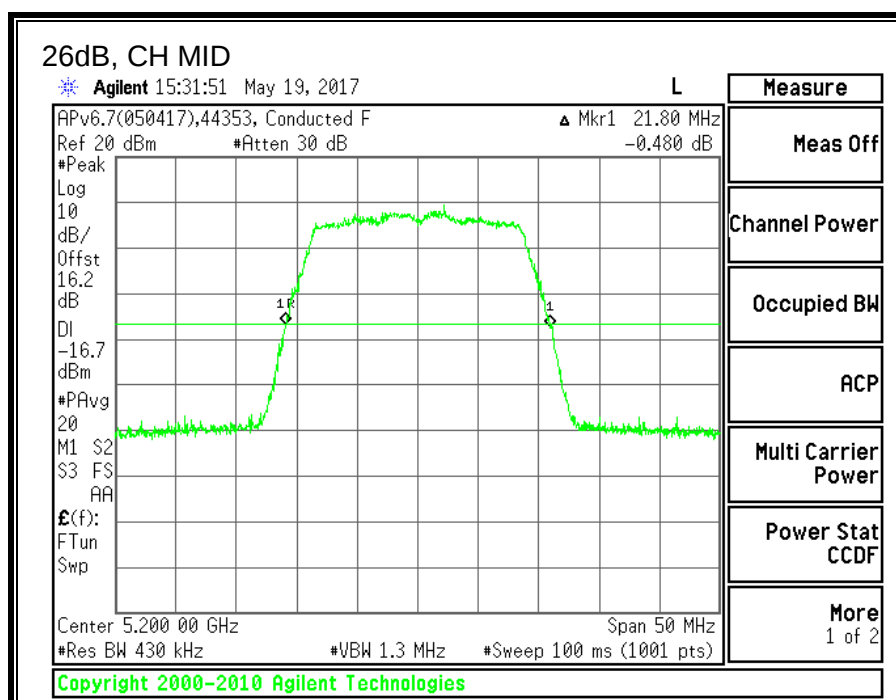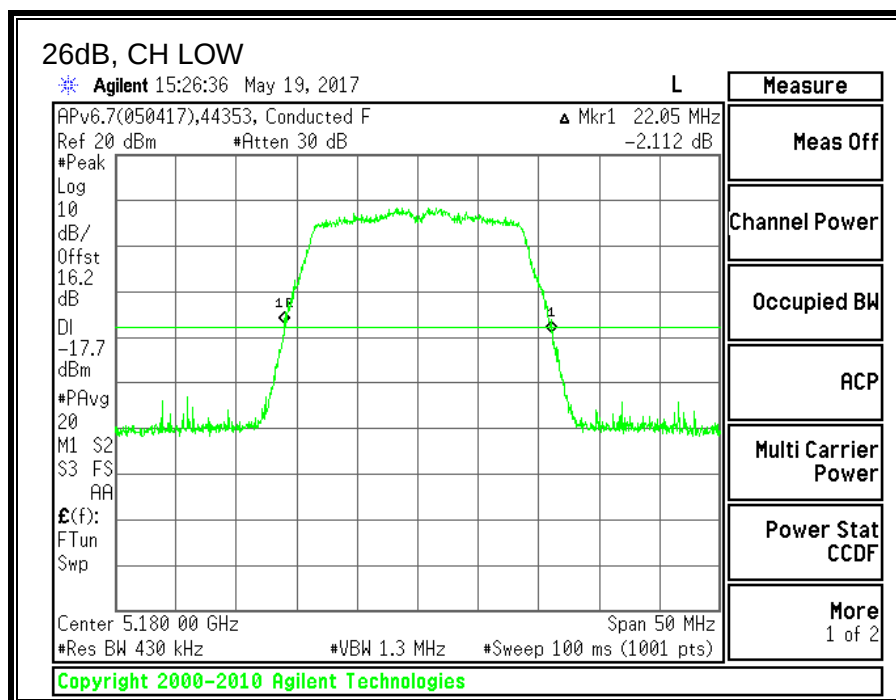

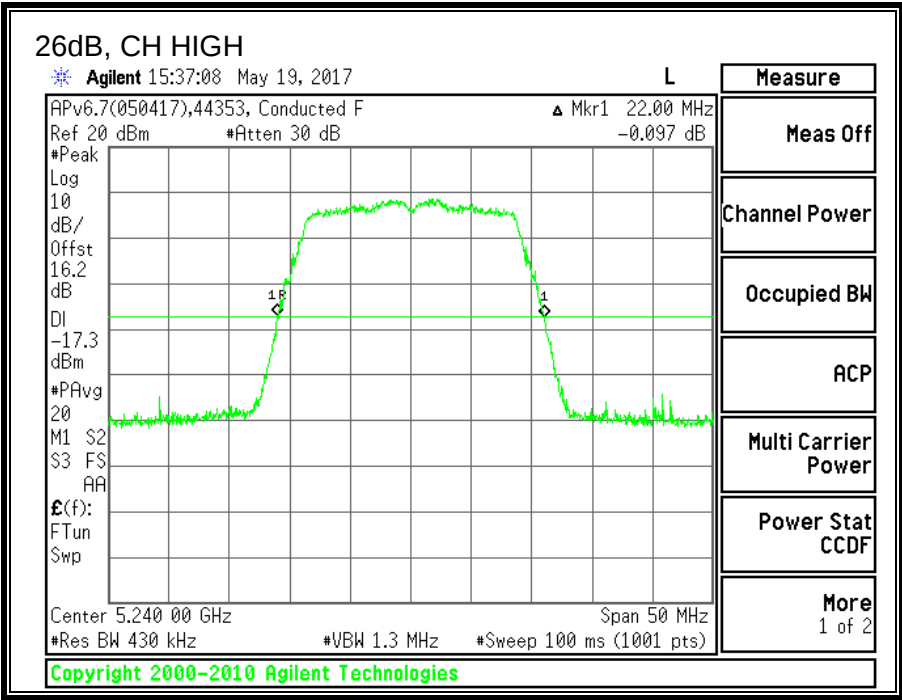



8.1.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Low	5180	17.7167
Mid	5200	17.6759
High	5240	17.7306

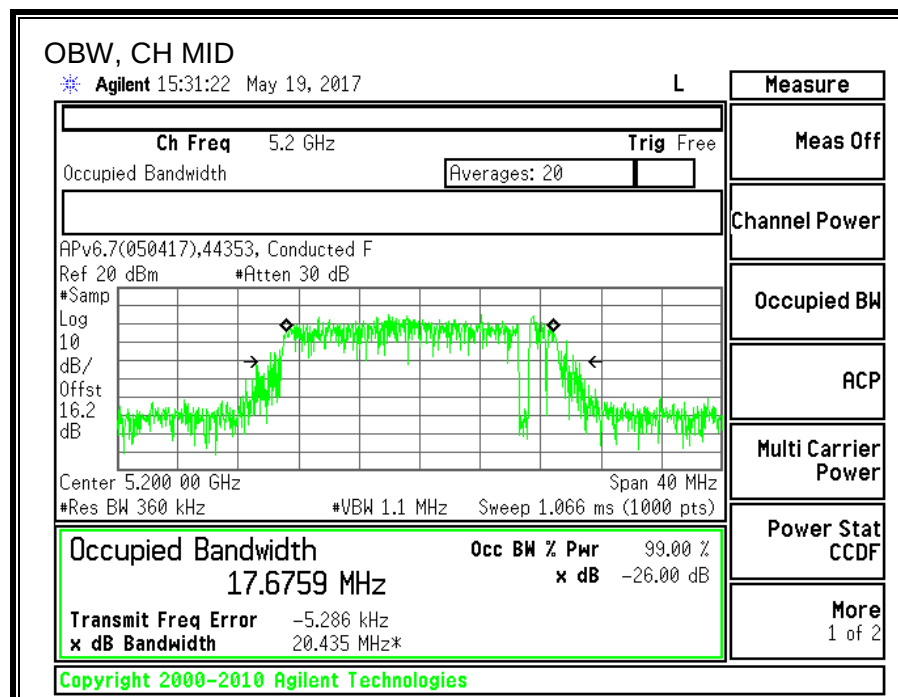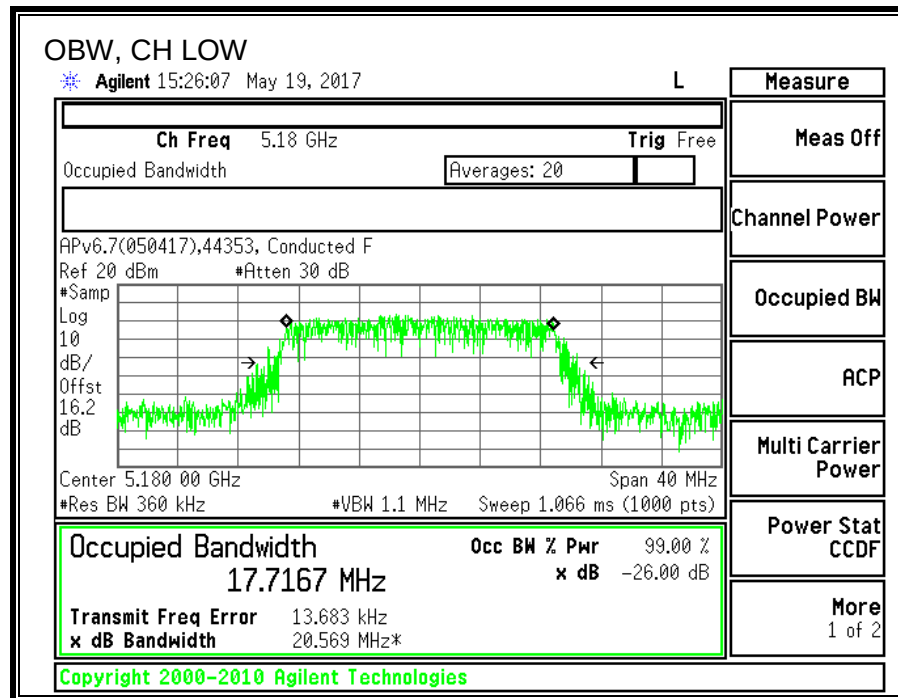

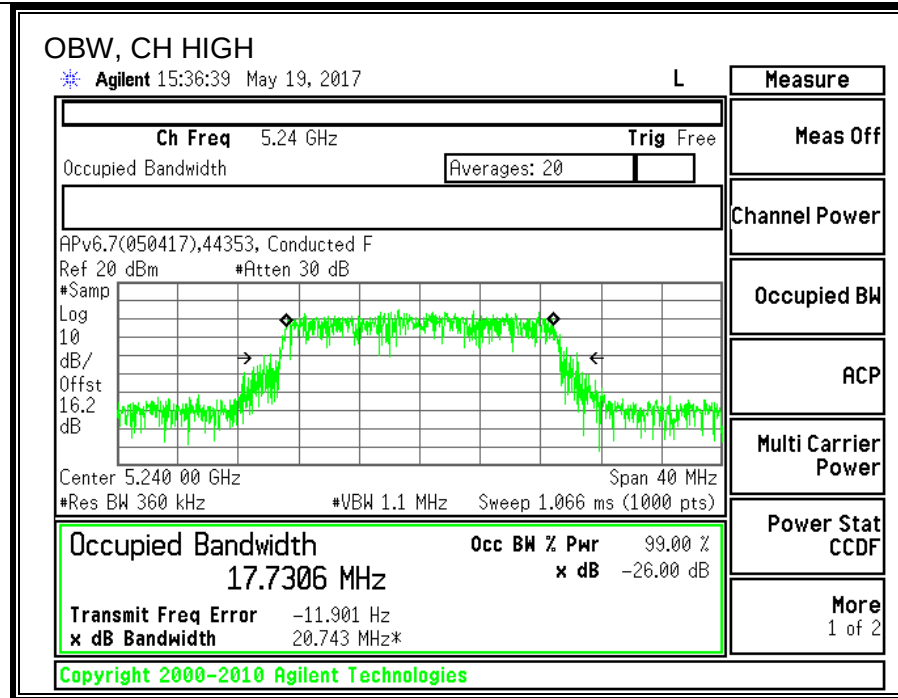

8.1.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Low	5180	18.98
Mid	5200	20.78
High	5240	20.83

8.1.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5180	-2.54	-2.72	24.00	11.00
Mid	5200	-2.54	-2.72	24.00	11.00
High	5240	-2.54	-2.72	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	18.98	18.98	24.00	-5.02
Mid	5200	20.78	20.78	24.00	-3.22
High	5240	20.83	20.83	24.00	-3.17

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5180	9.06	9.06	11.00	-1.95
Mid	5200	9.00	9.00	11.00	-2.00
High	5240	9.85	9.85	11.00	-1.15

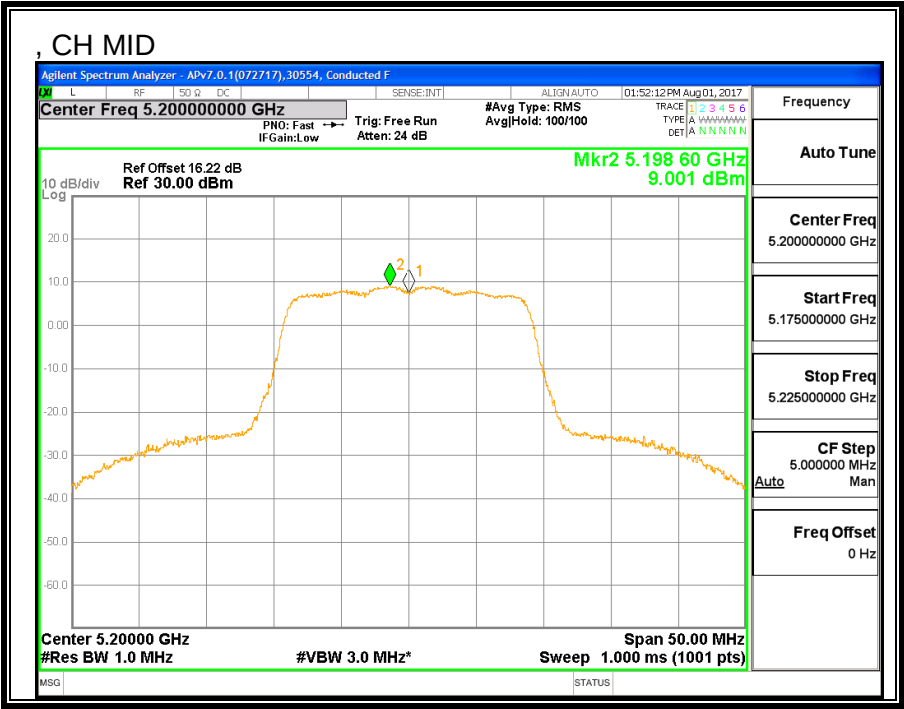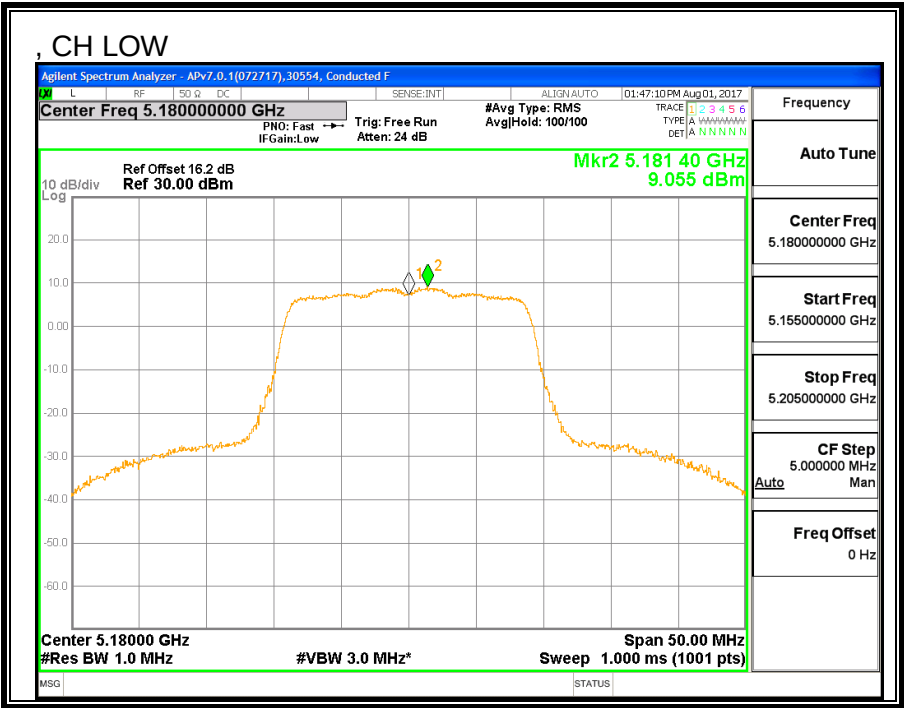

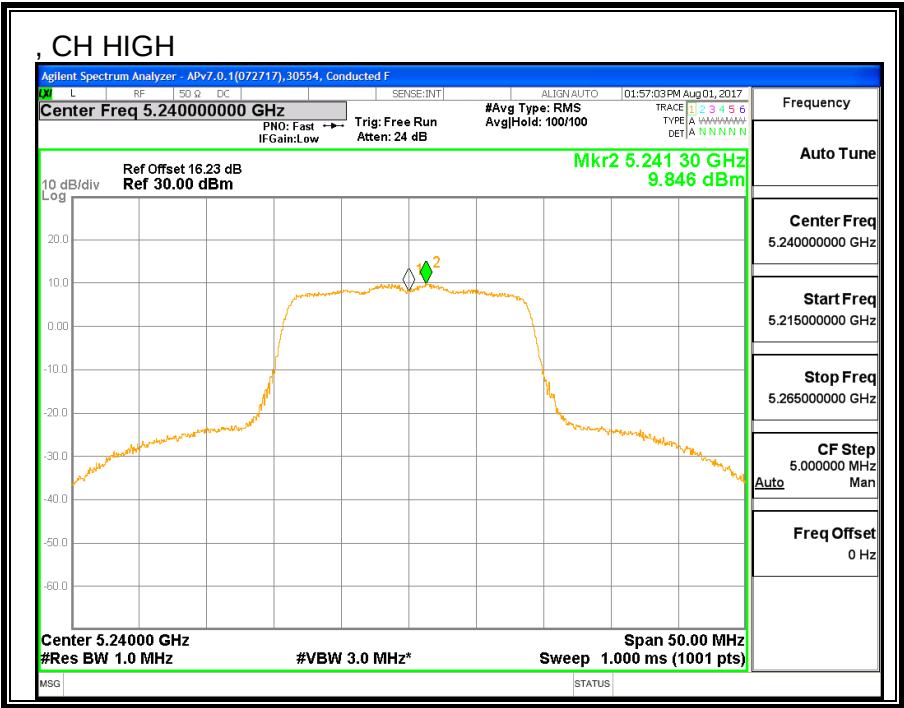

8.2. 11n HT20 LAT 3 SISO MODE IN THE 5.2GHz BAND



8.2.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5180	22.15
Mid	5200	21.95
High	5240	22.00

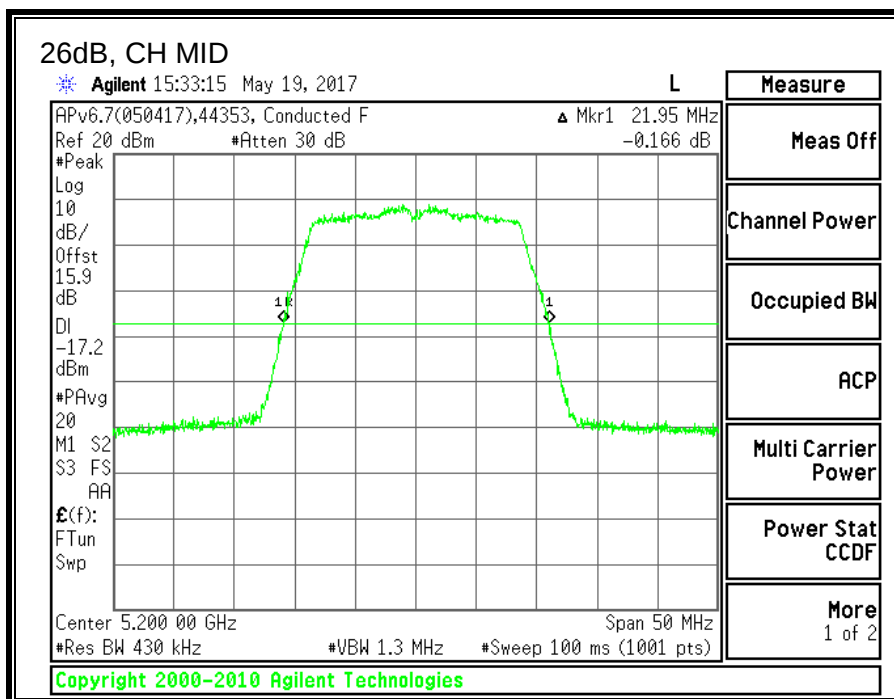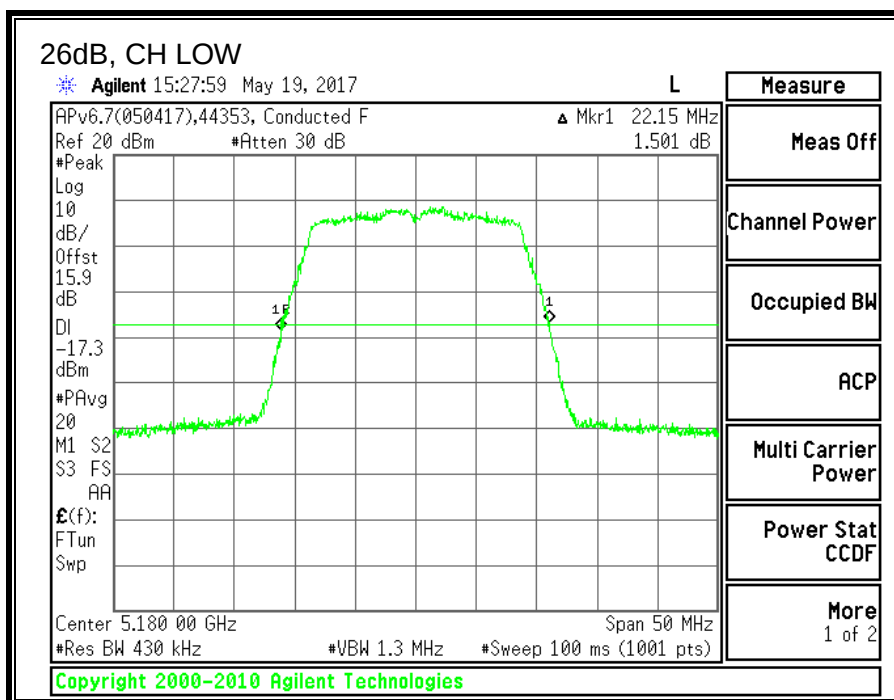

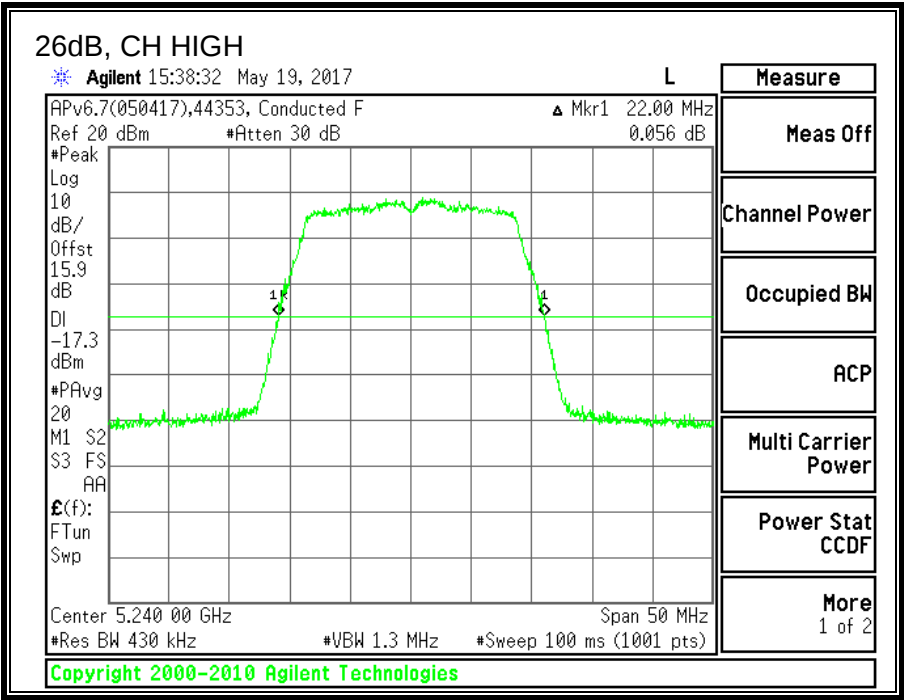



8.2.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Low	5180	17.6666
Mid	5200	17.6996
High	5240	17.7296

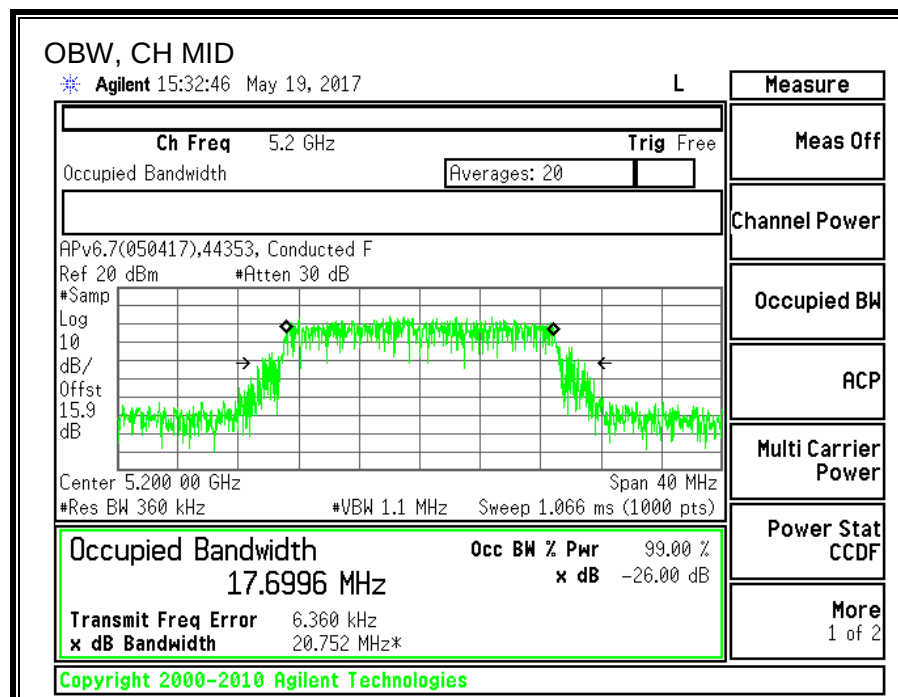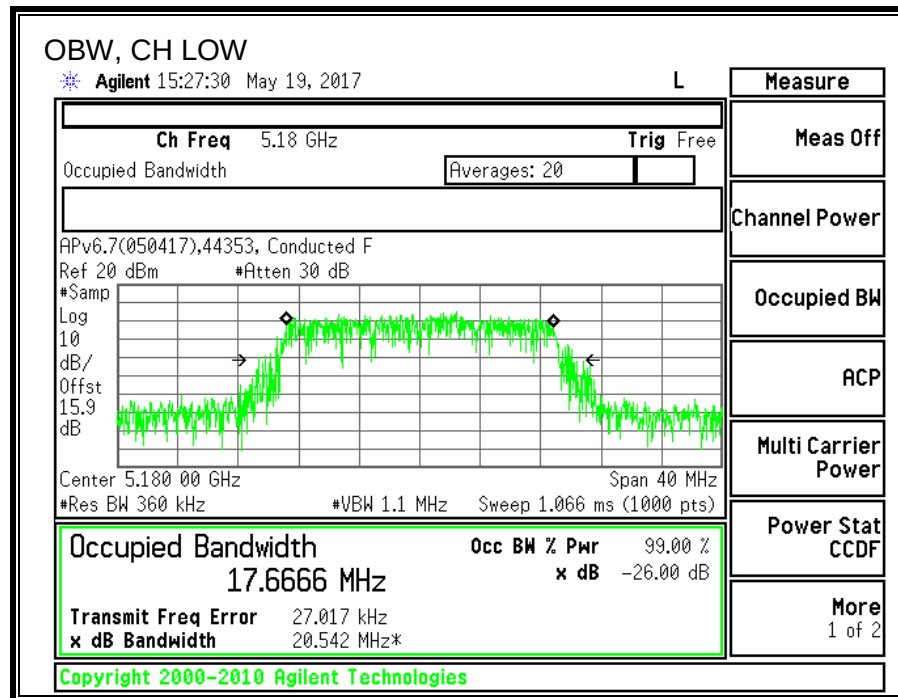

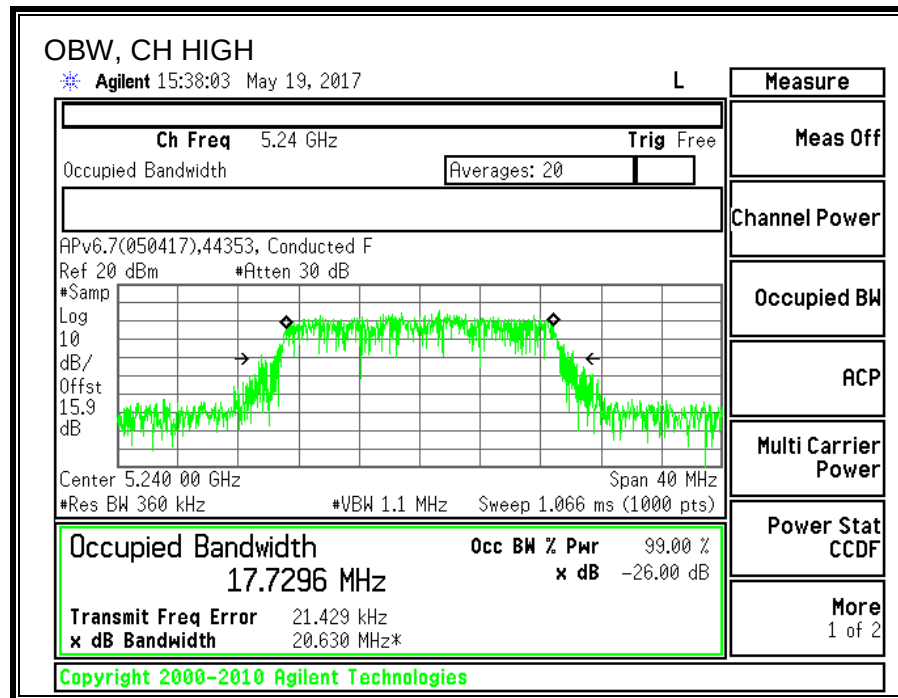

8.2.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Low	5180	18.96
Mid	5200	20.79
High	5240	20.86

8.2.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5180	-7.51	-7.51	24.00	11.00
Mid	5200	-7.51	-7.51	24.00	11.00
High	5240	-7.51	-7.51	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	18.96	18.96	24.00	-5.04
Mid	5200	20.79	20.79	24.00	-3.21
High	5240	20.86	20.86	24.00	-3.14

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5180	8.85	8.85	11.00	-2.15
Mid	5200	9.13	9.13	11.00	-1.88
High	5240	9.49	9.49	11.00	-1.51

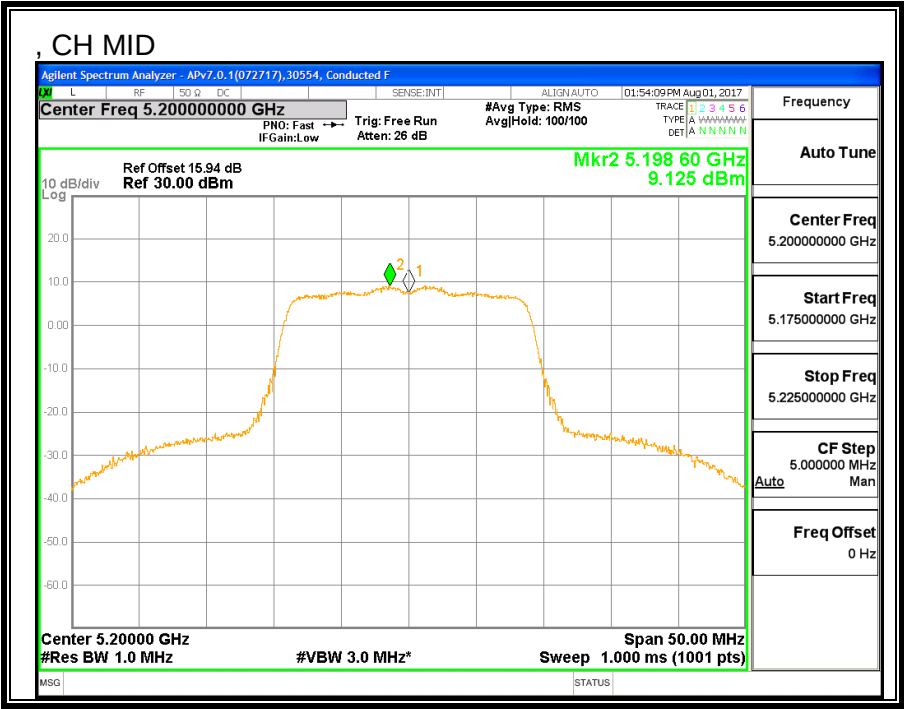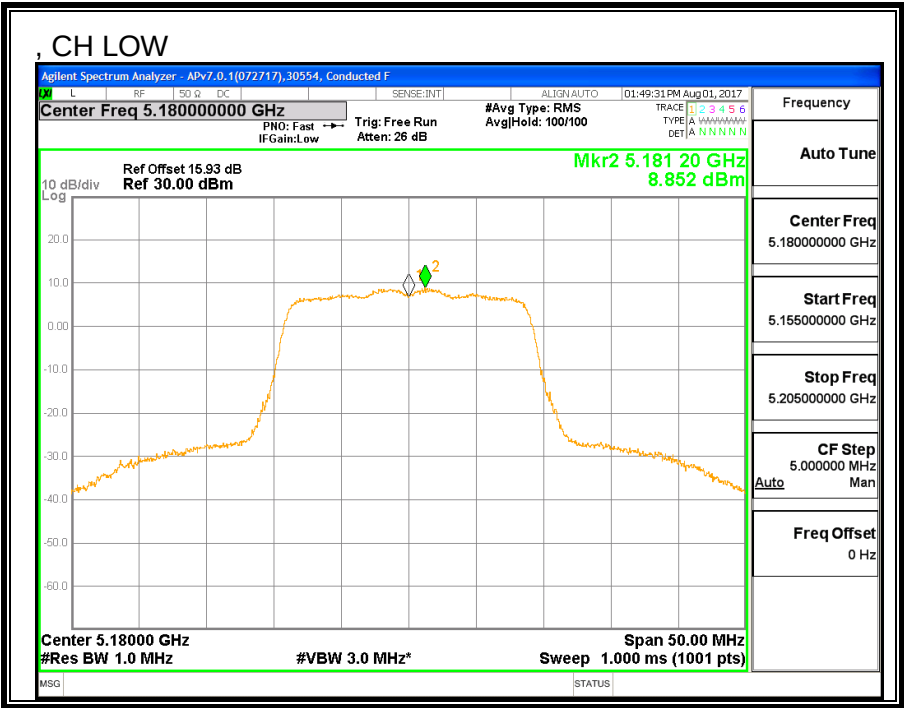

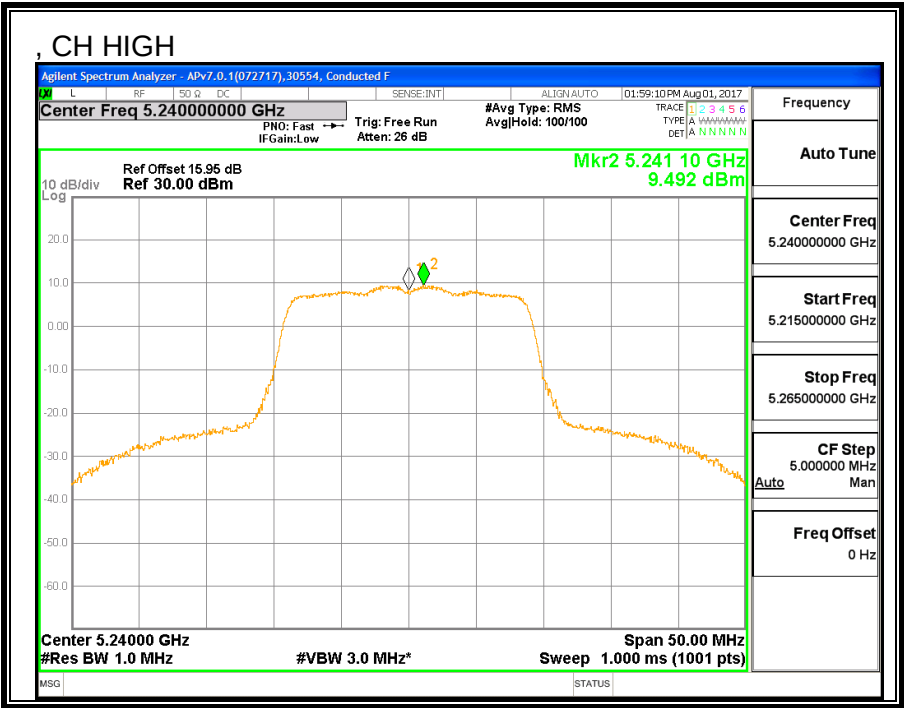

8.3. 11n HT20 2TX CDD MIMO MODE IN THE 5.2GHz BAND



8.3.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Low	5180	22.10	21.65
Mid	5200	22.00	21.55
High	5240	22.10	21.70

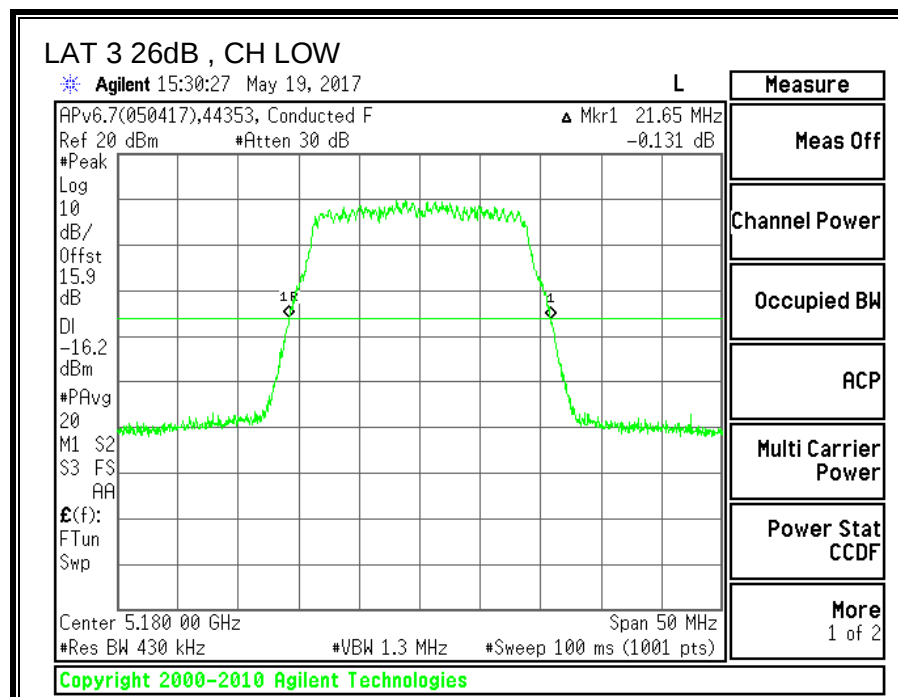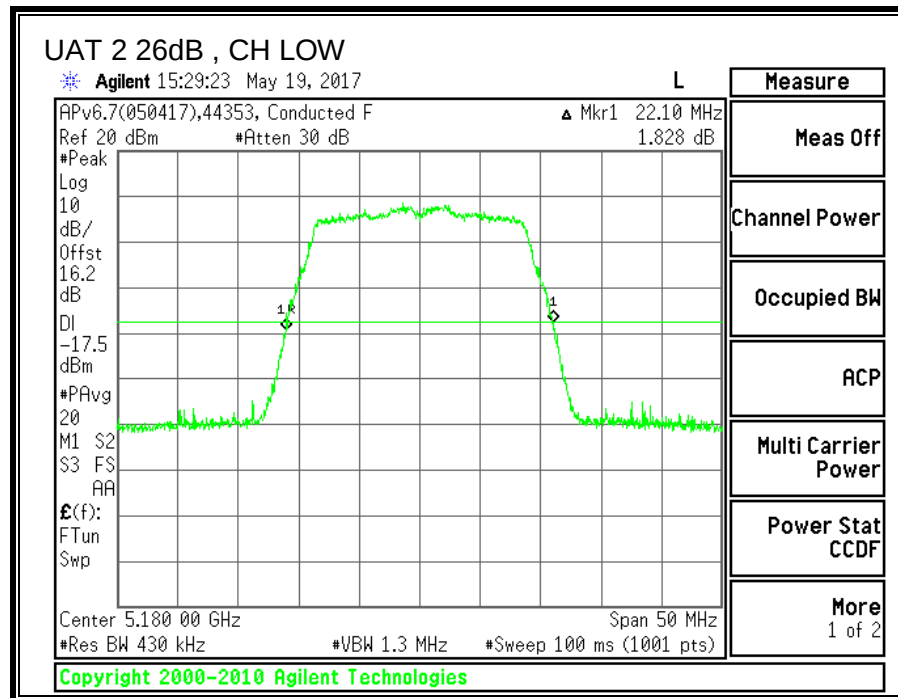

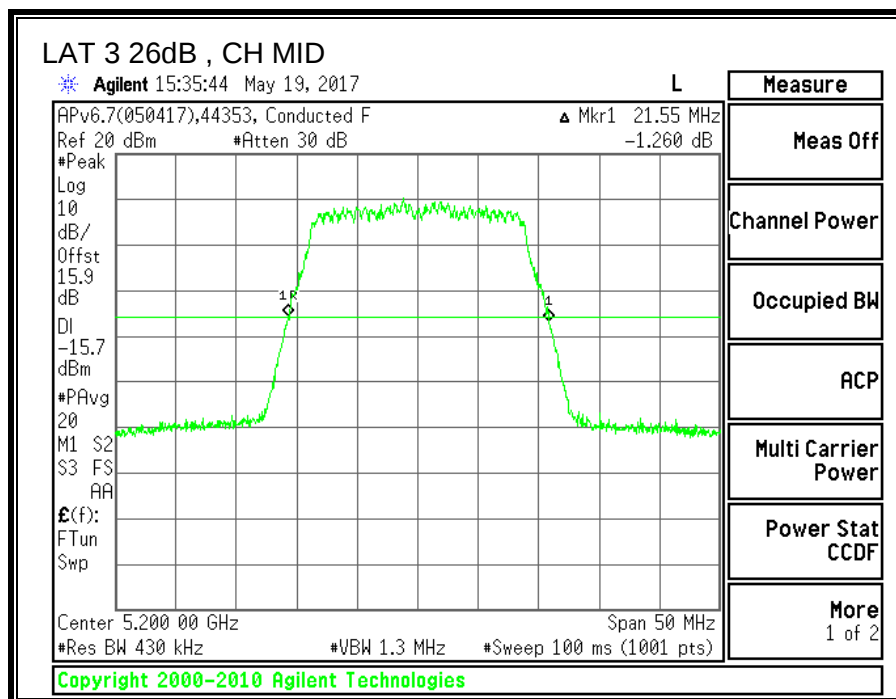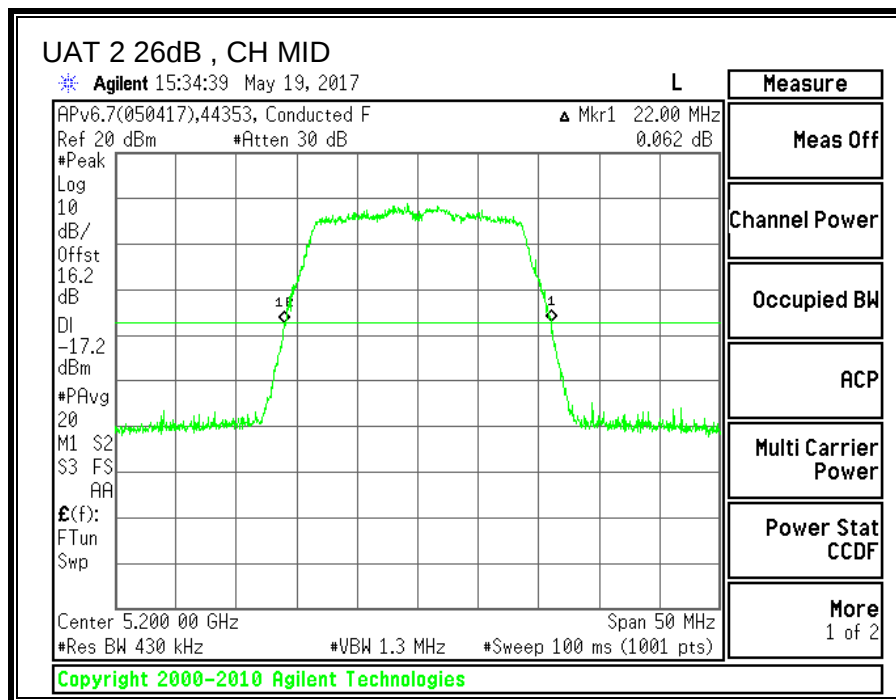

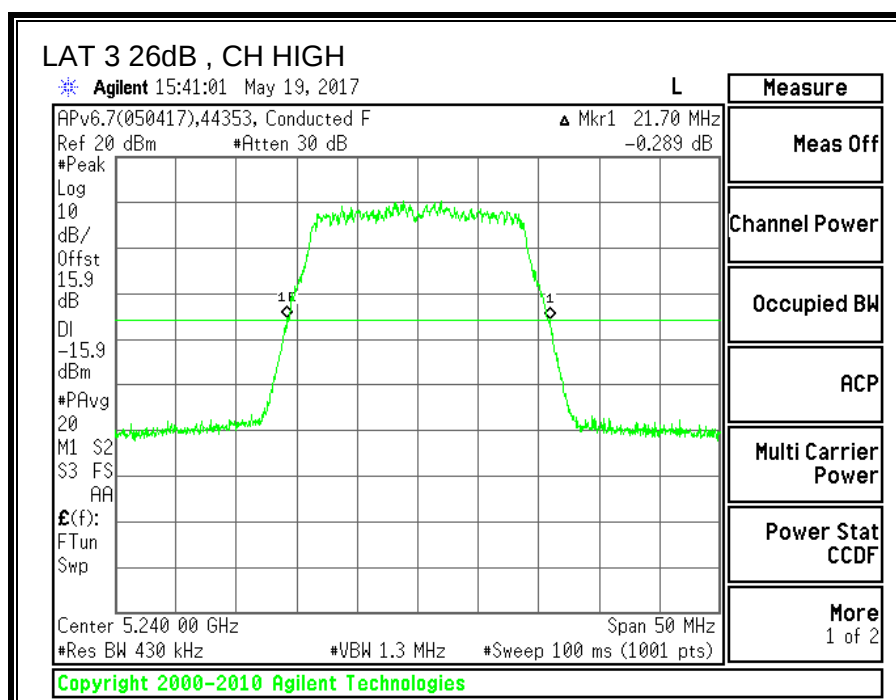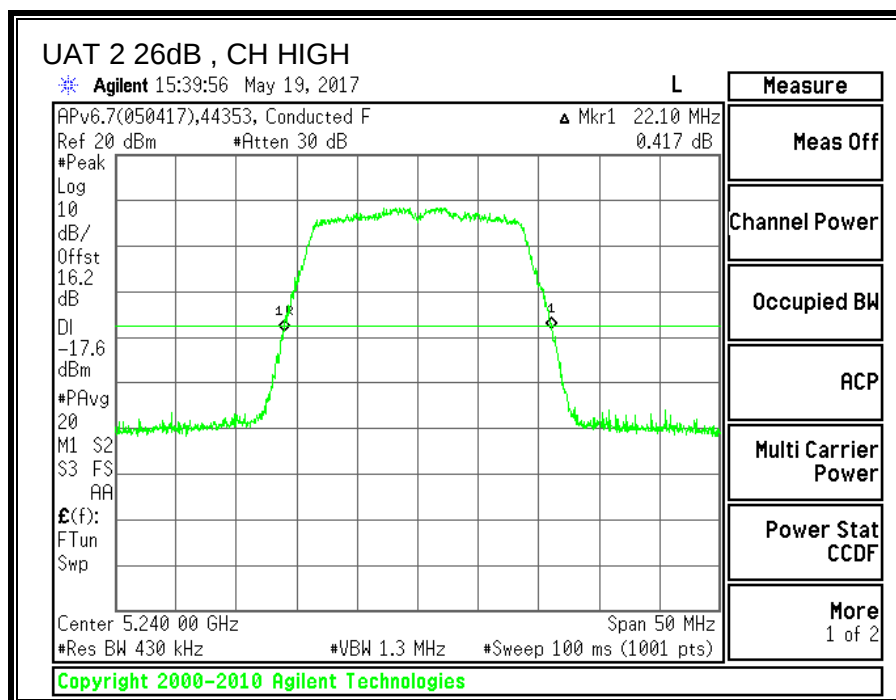



8.3.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Low	5180	17.7329	17.6748
Mid	5200	17.6841	17.7245
High	5240	17.7241	17.7054

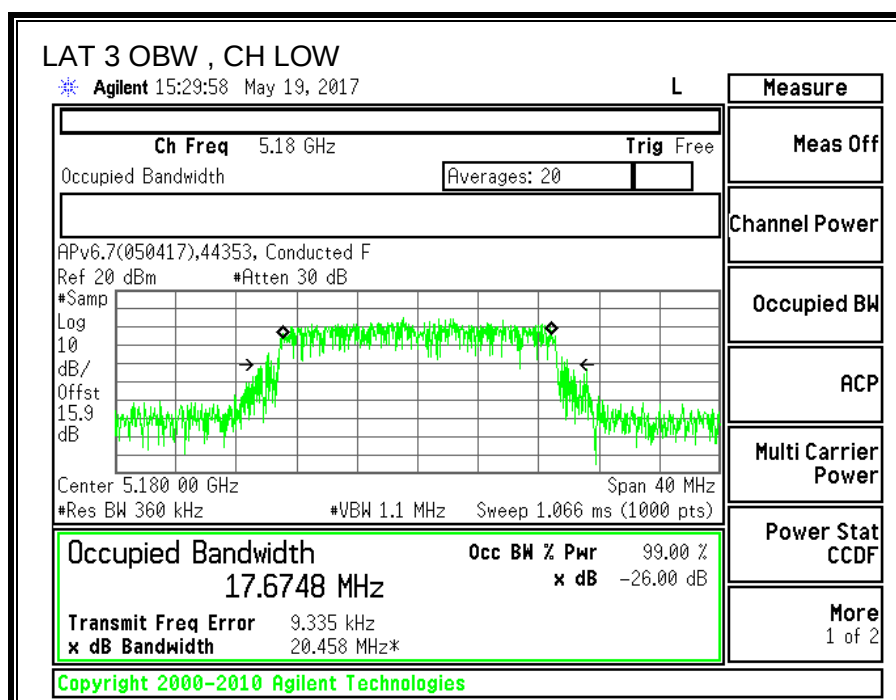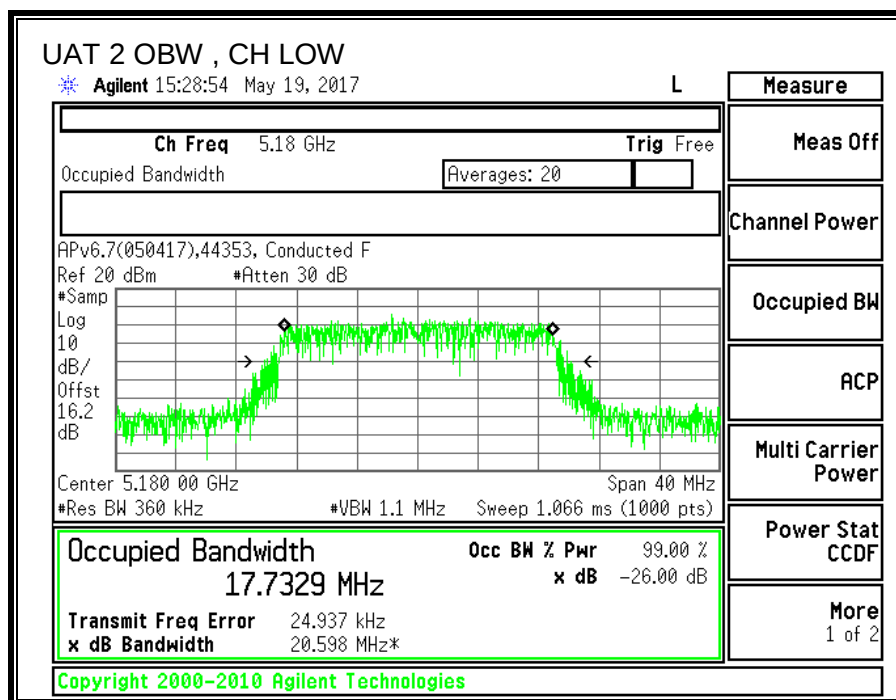

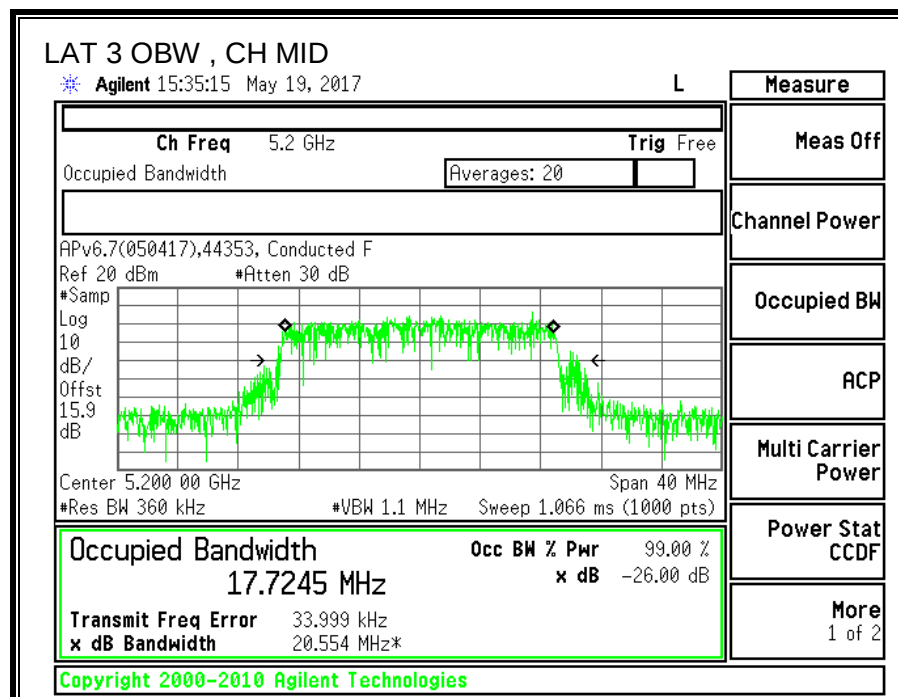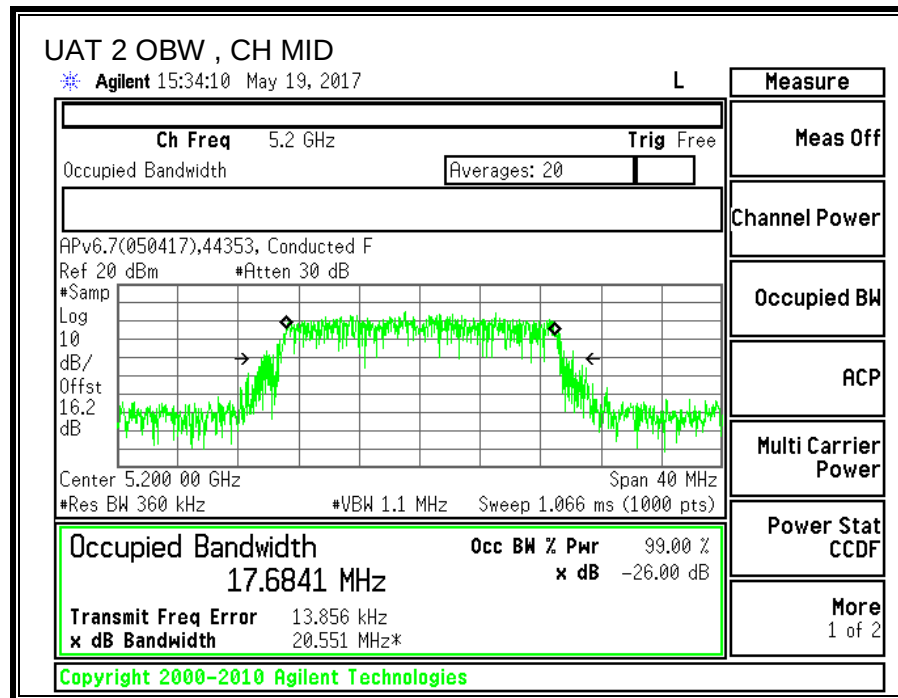

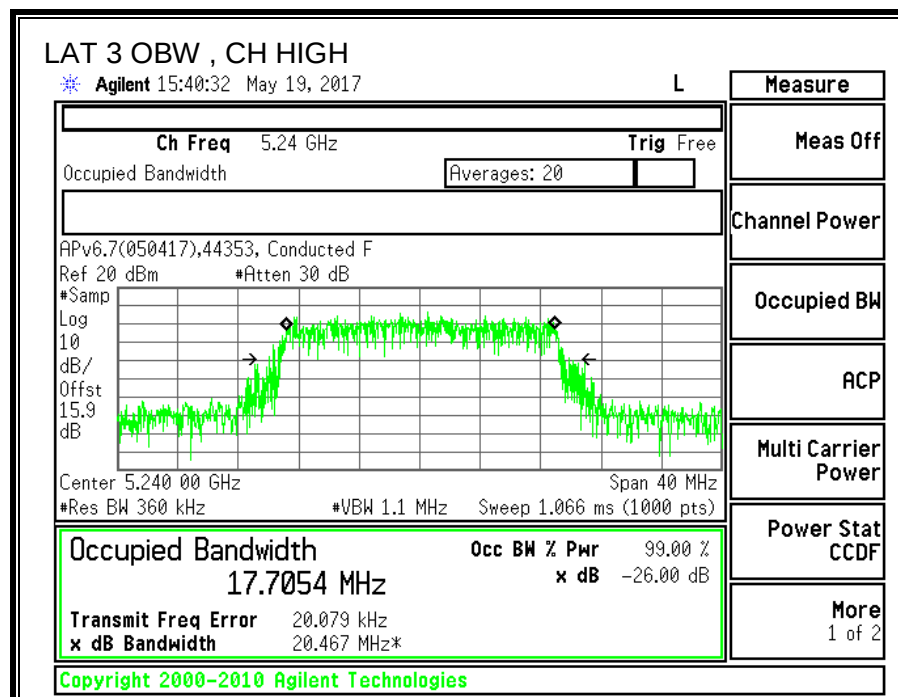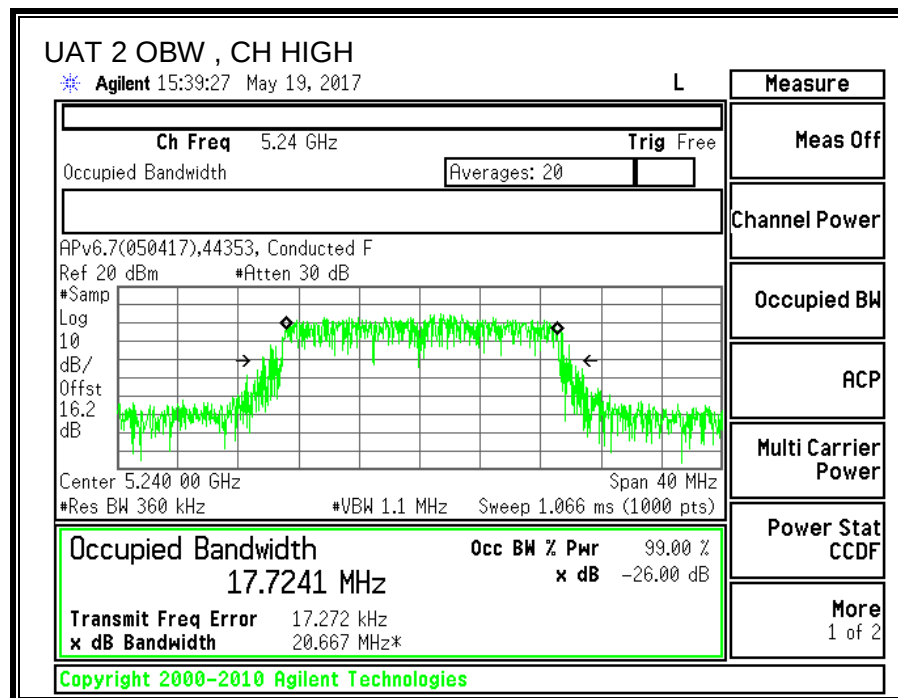

8.3.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Low	5180	17.78	17.82	20.81
Mid	5200	17.83	17.89	20.87
High	5240	17.89	17.91	20.91

8.3.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.72	-7.51	-4.49

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-2.72	-7.51	-1.78

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5180	-4.49	-1.78	24.00	11.00
Mid	5200	-4.49	-1.78	24.00	11.00
High	5240	-4.49	-1.78	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results



Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	17.78	17.82	20.81	24.00	-3.19
Mid	5200	17.83	17.89	20.87	24.00	-3.13
High	5240	17.89	17.91	20.91	24.00	-3.09

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/1MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5180	8.13	7.67	10.91	11.00	-0.09
Mid	5200	7.26	7.26	10.27	11.00	-0.73
High	5240	8.02	7.66	10.86	11.00	-0.14

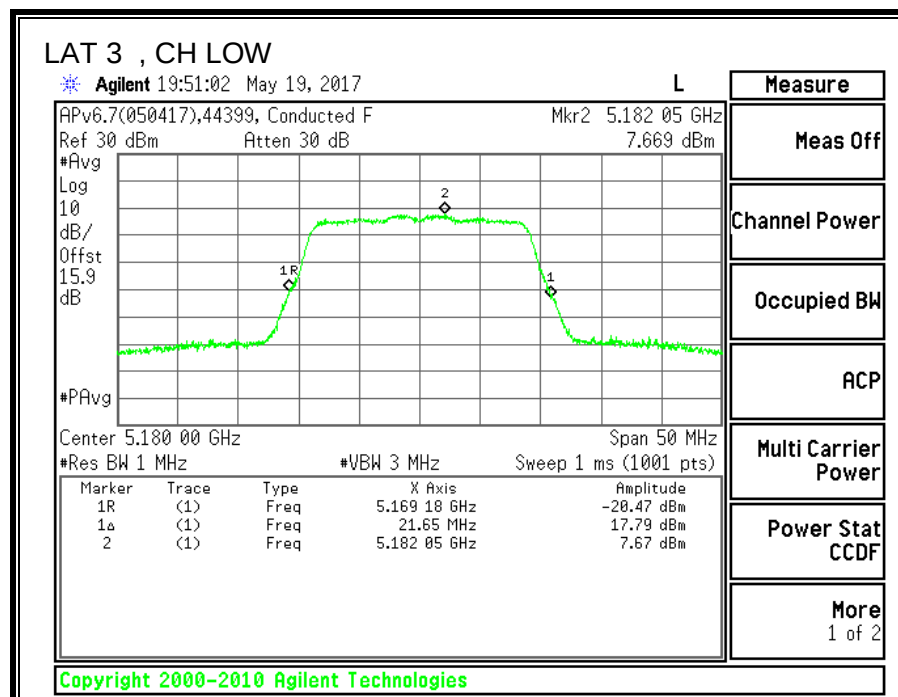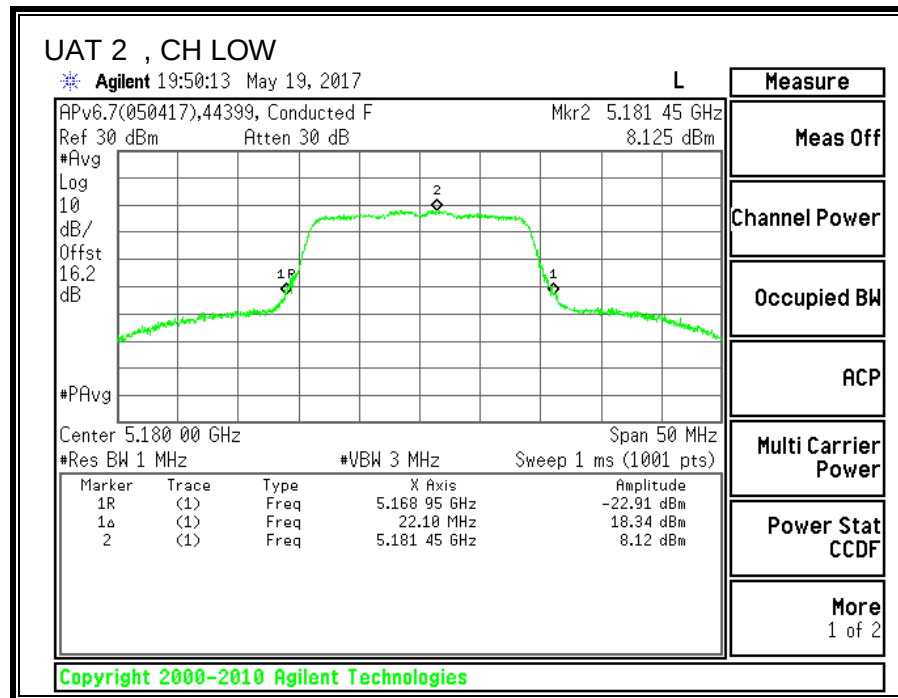

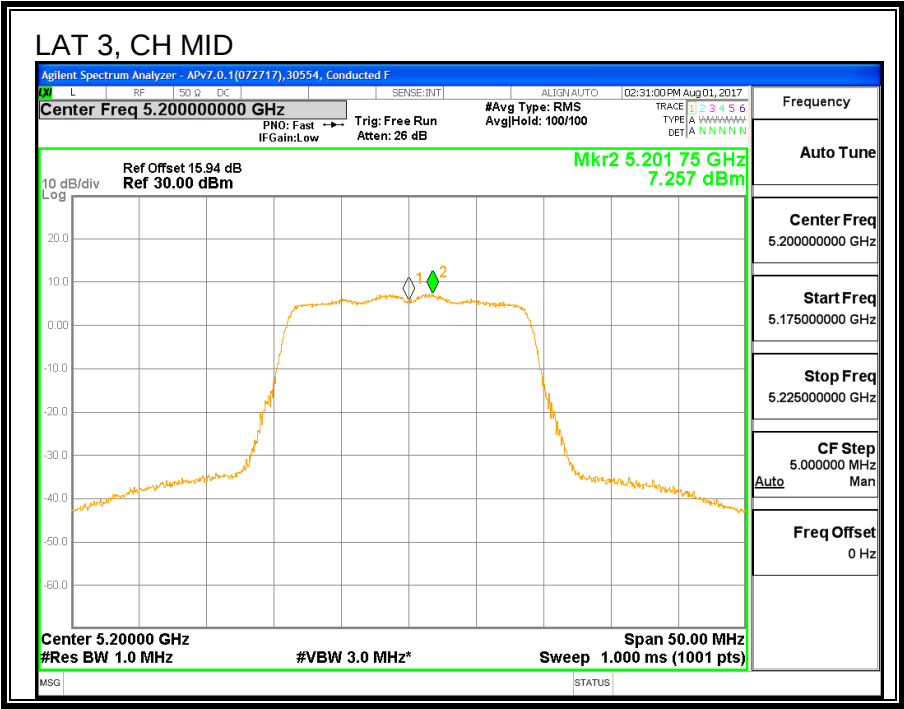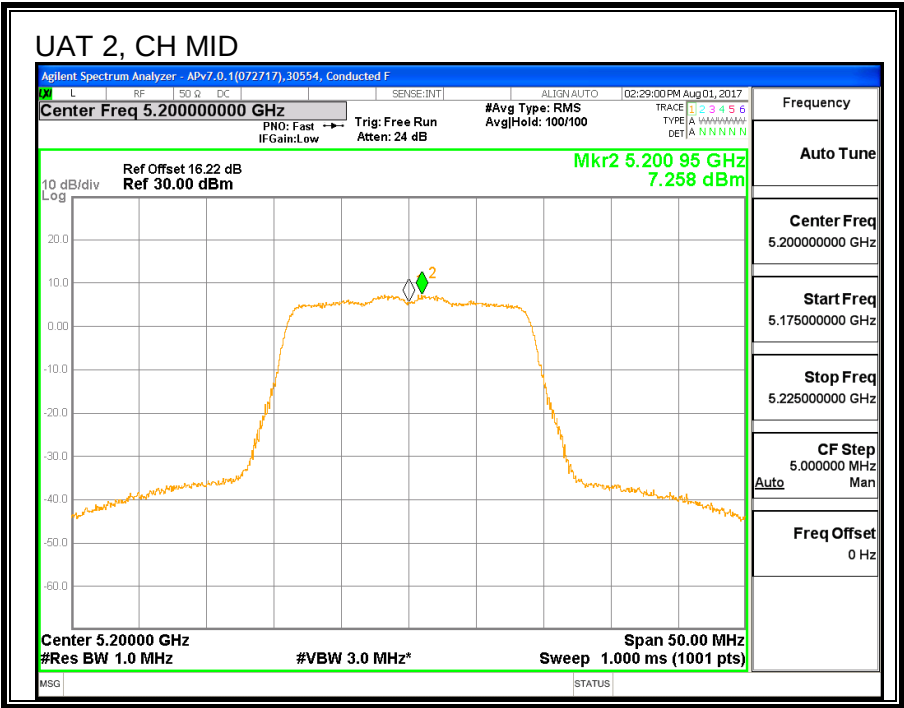

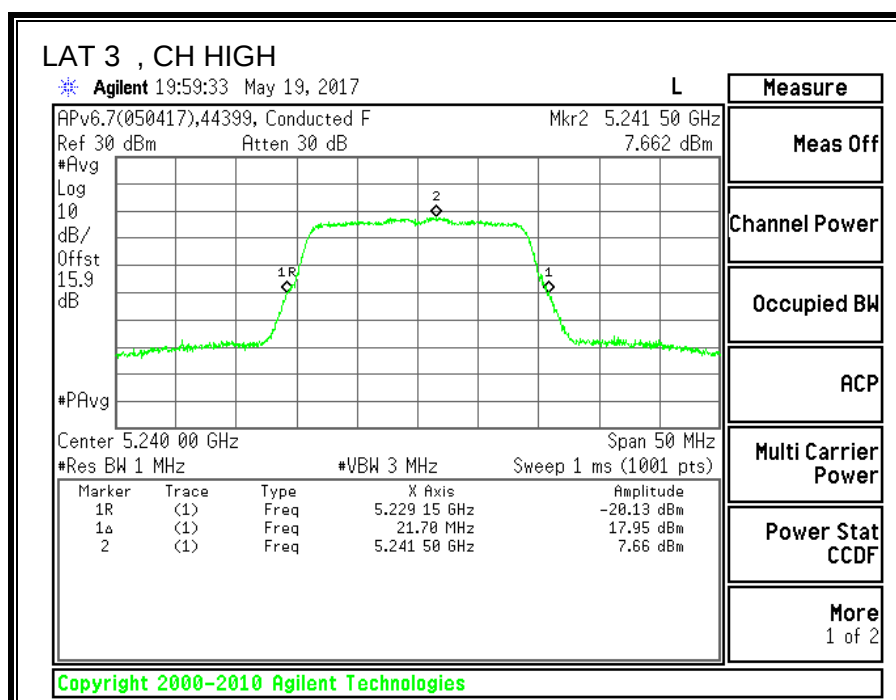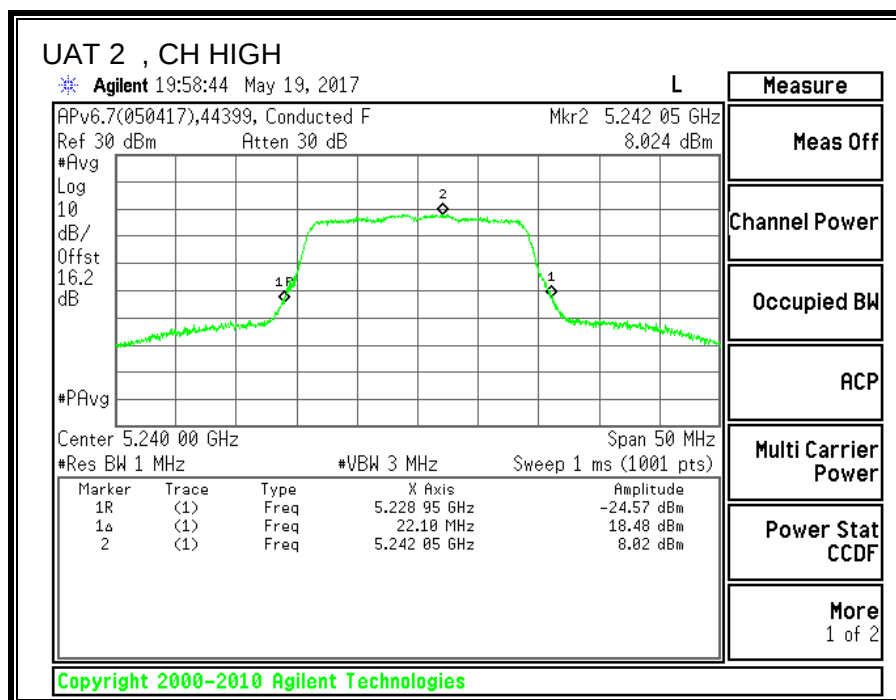

8.4. 11n HT40 UAT 2 SISO MODE IN THE 5.2GHz BAND



8.4.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5190	40.6
High	5230	40.6

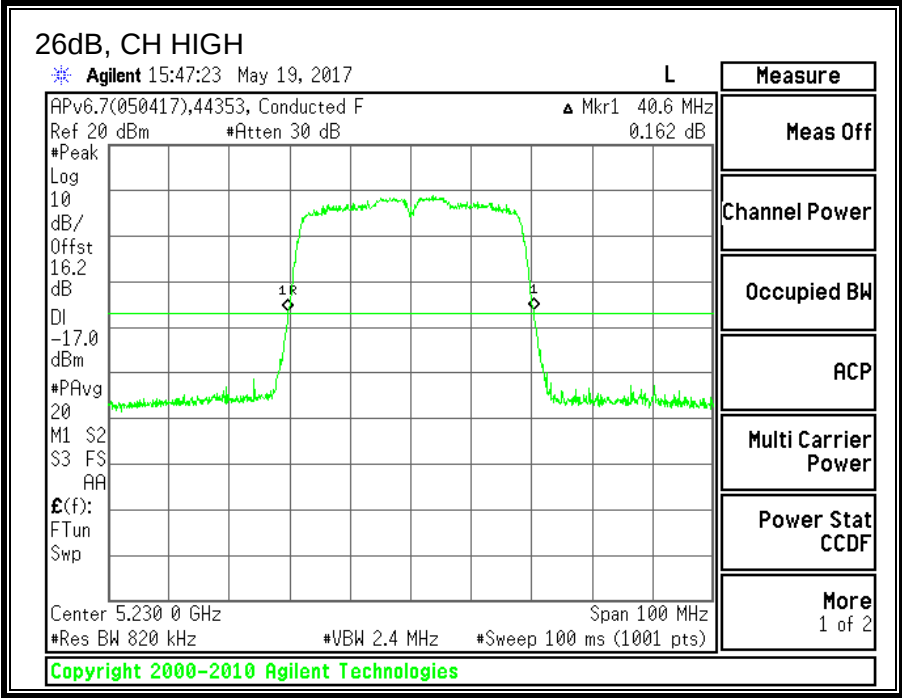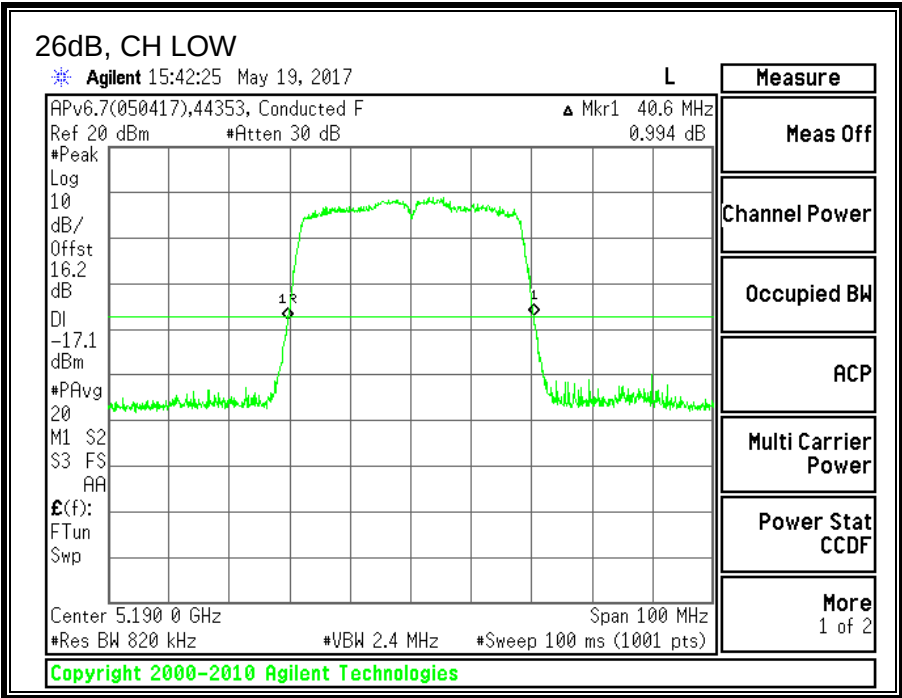



8.4.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Low	5190	36.1022
High	5230	36.1854

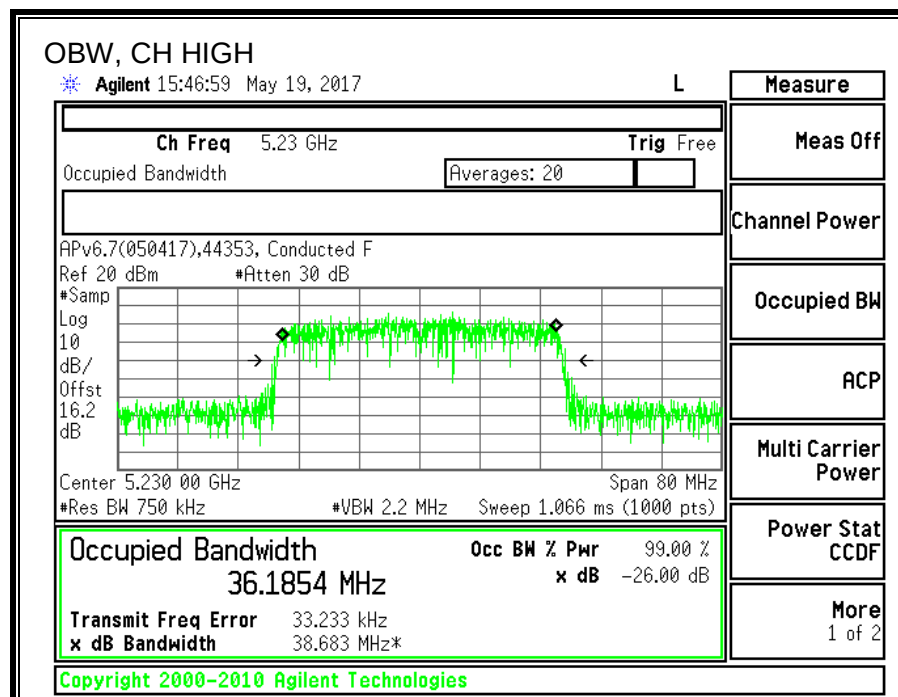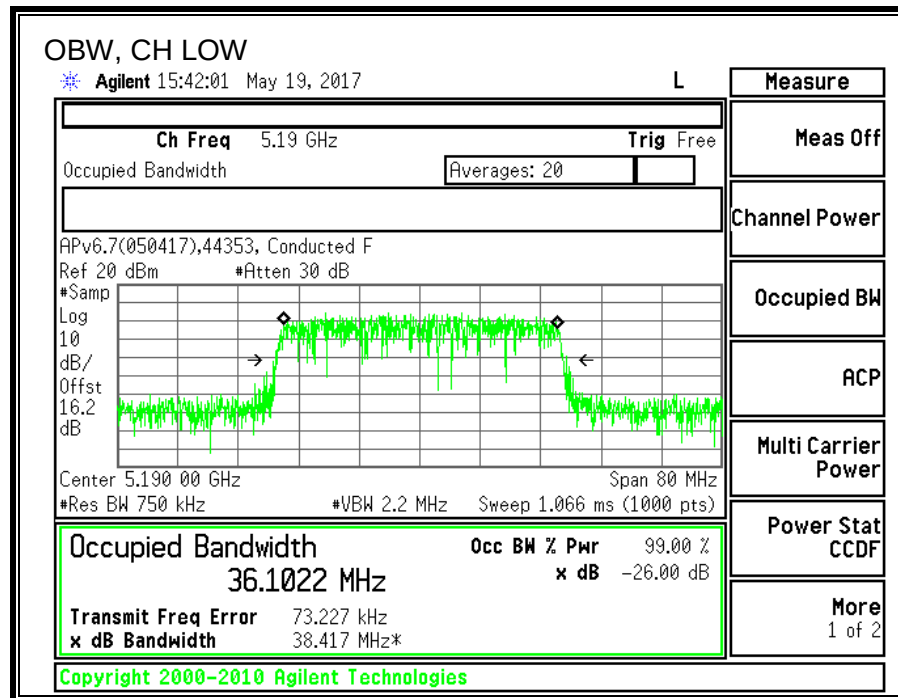

8.4.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Low	5190	17.86
High	5230	19.41

8.4.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5190	-2.72	-2.72	24.00	11.00
High	5230	-2.72	-2.72	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'PSD
--------------------	------	--------------------------------------

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	17.86	17.86	24.00	-6.14
High	5230	19.41	19.41	24.00	-4.59

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5190	8.09	8.19	11.00	-2.81
High	5230	8.04	8.14	11.00	-2.86

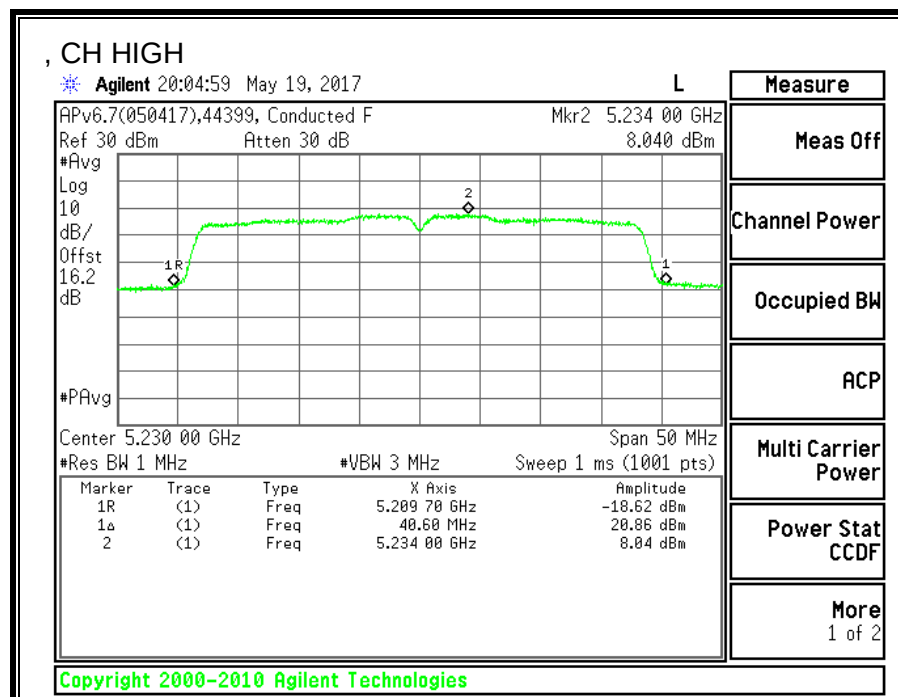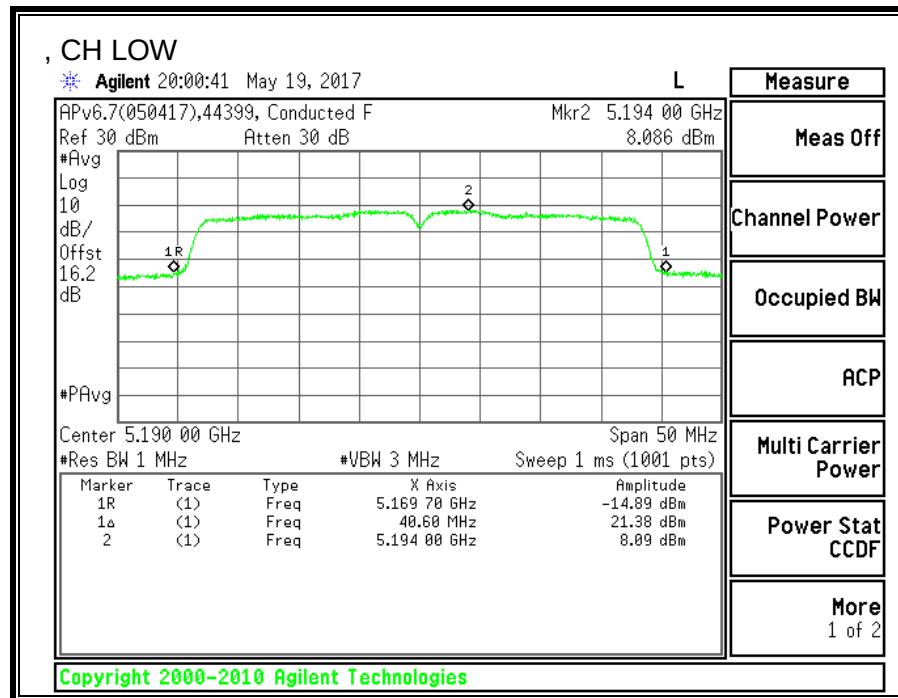

8.5. 11n HT40 LAT 3 SISO MODE IN THE 5.2GHz BAND



8.5.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5190	40.6
High	5230	40.5

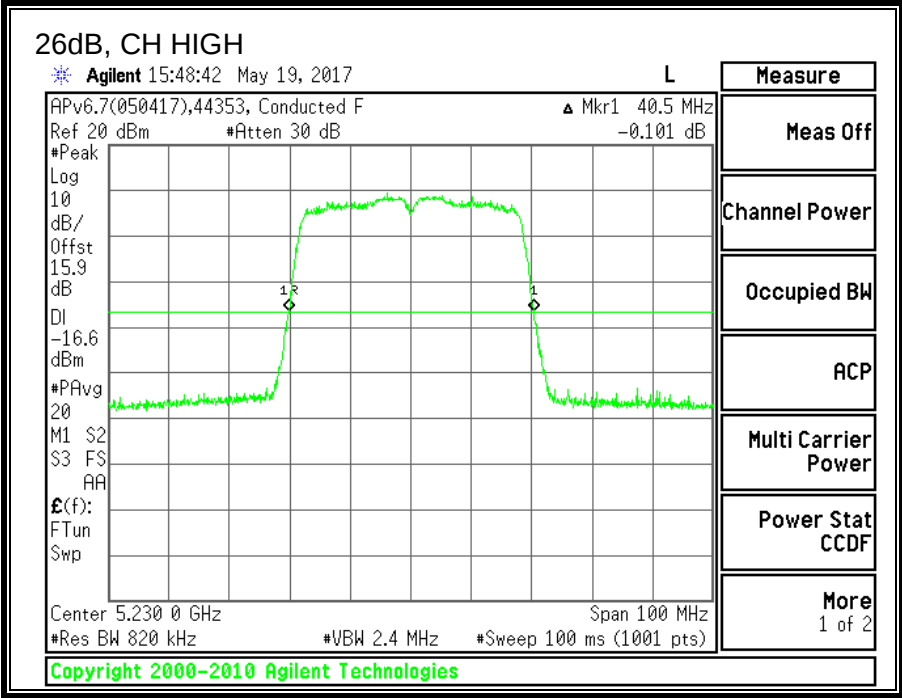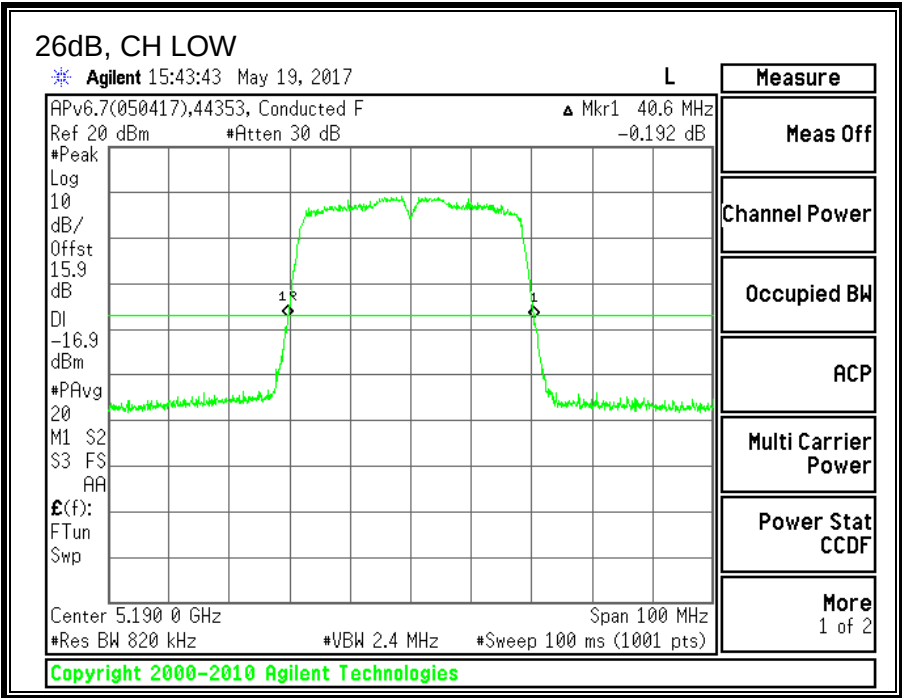



8.5.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Low	5190	36.1426
High	5230	36.1008

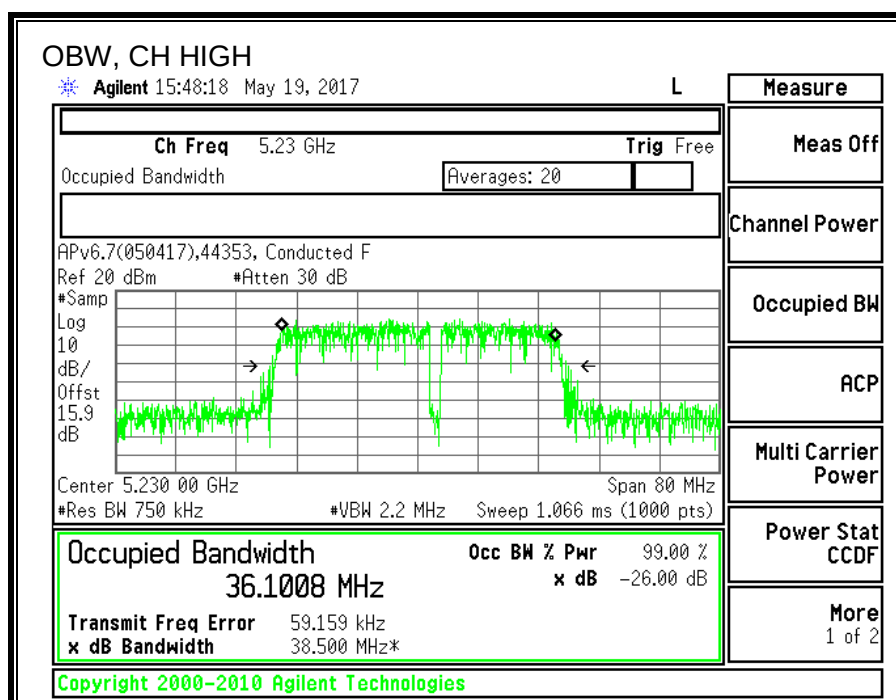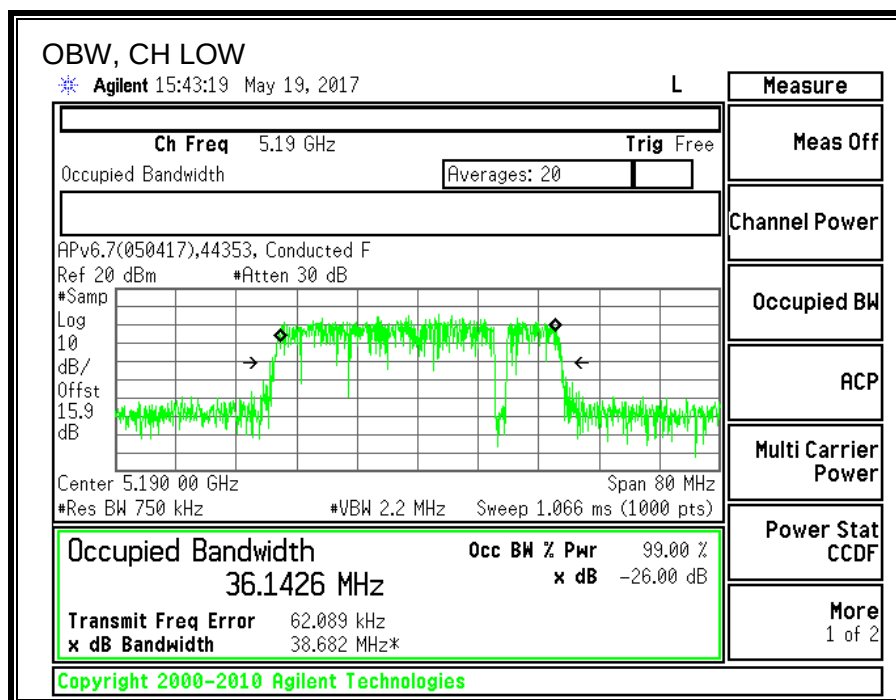

8.5.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Low	5190	17.84
High	5230	19.46

8.5.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5190	-7.51	-7.51	24.00	11.00
High	5230	-7.51	-7.51	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'PSD
--------------------	------	--------------------------------------

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	17.84	17.84	24.00	-6.16
High	5230	19.46	19.46	24.00	-4.54

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5190	7.96	8.06	11.00	-2.94
High	5230	7.87	7.97	11.00	-3.03

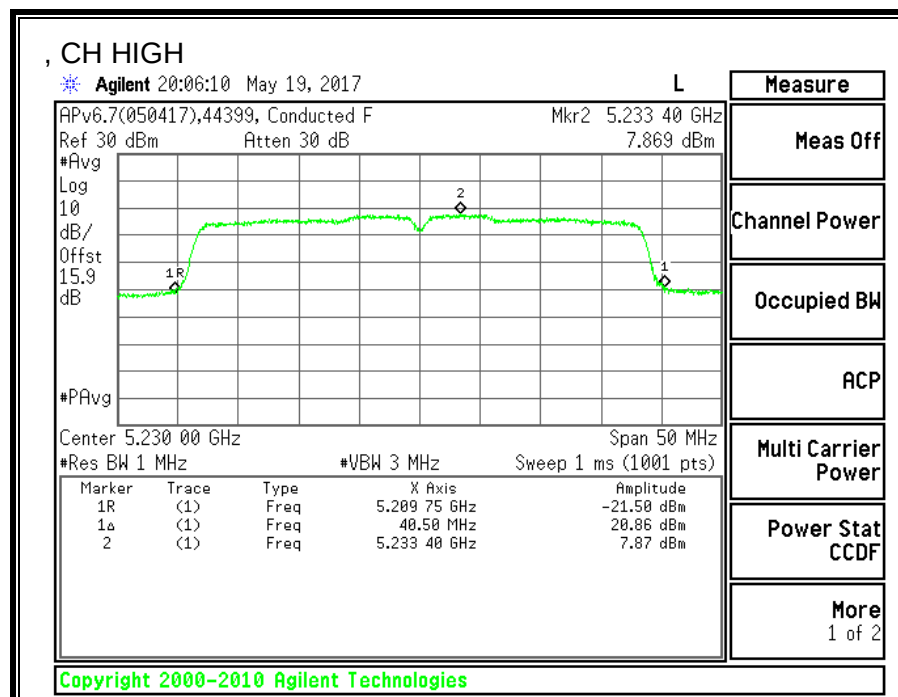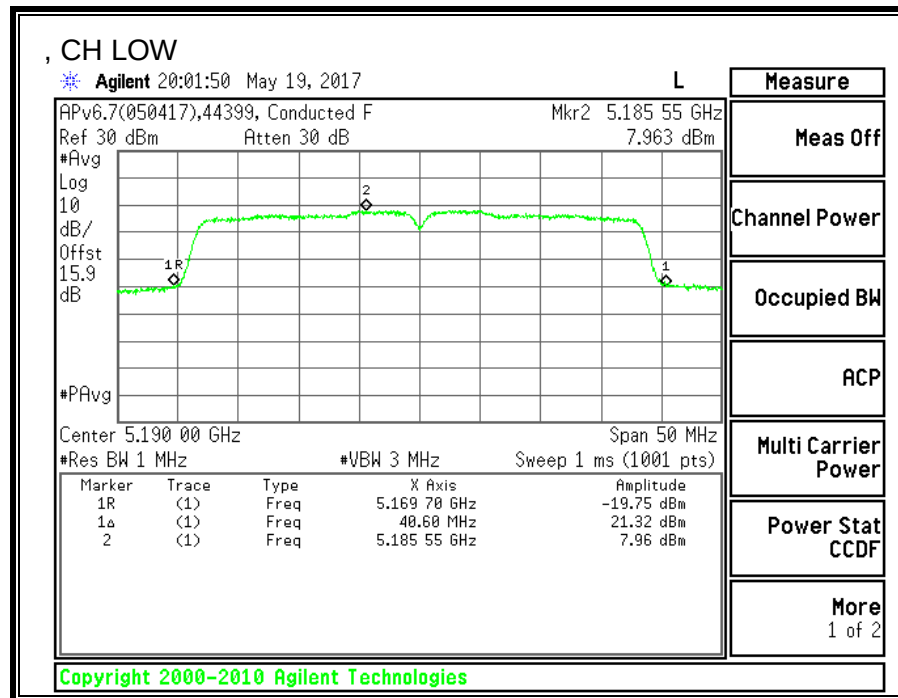

8.6. 11n HT40 2TX CDD MIMO MODE IN THE 5.2GHz BAND



8.6.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Low	5190	40.4	40.2
High	5230	40.7	40.1

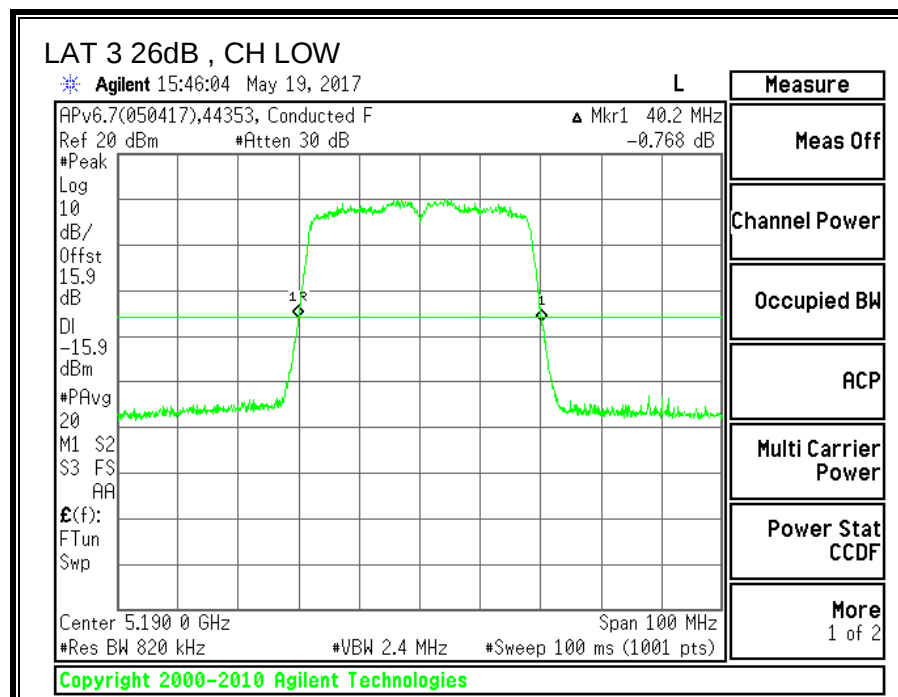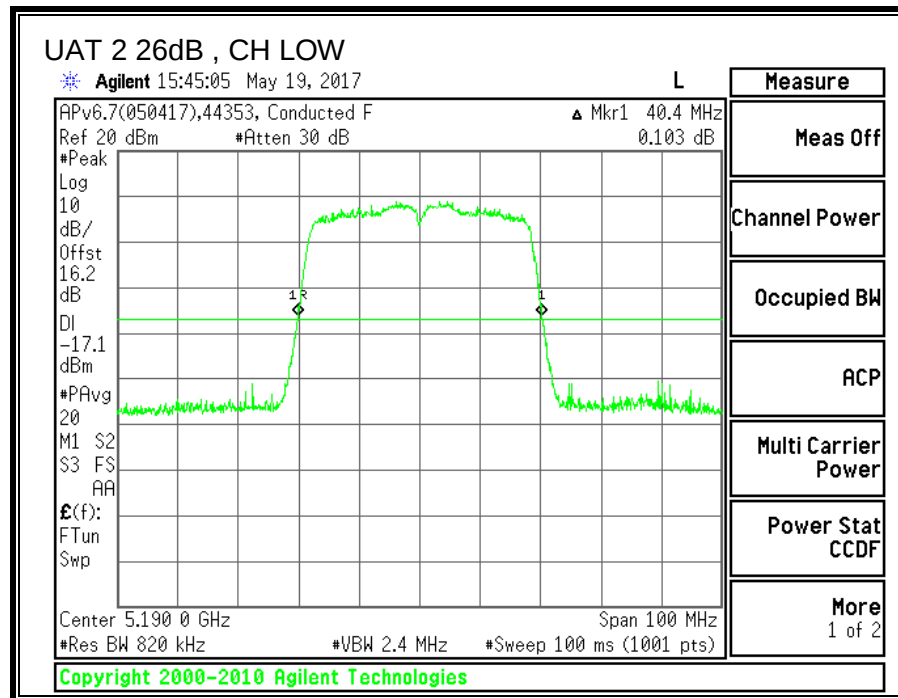

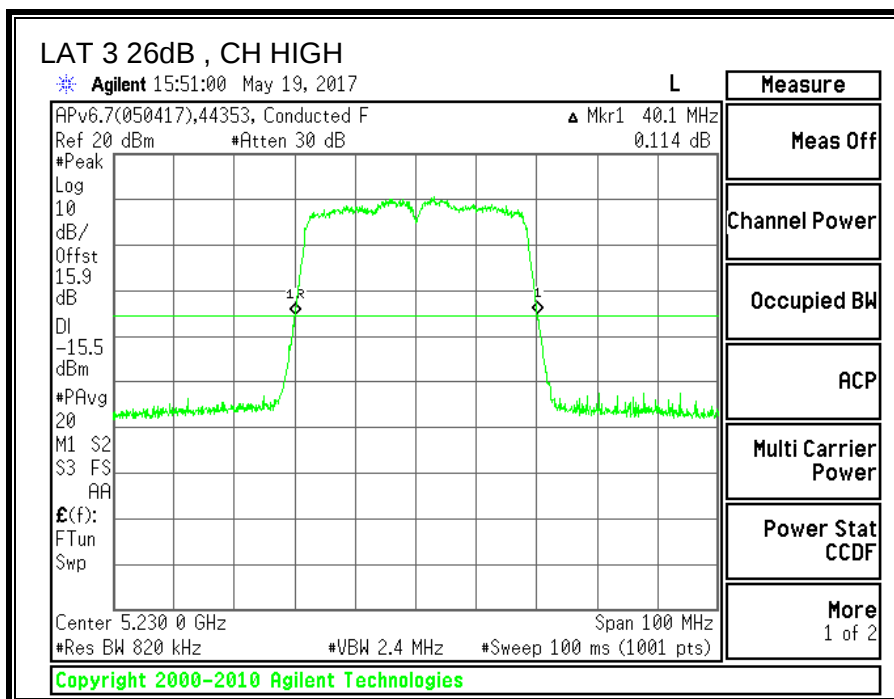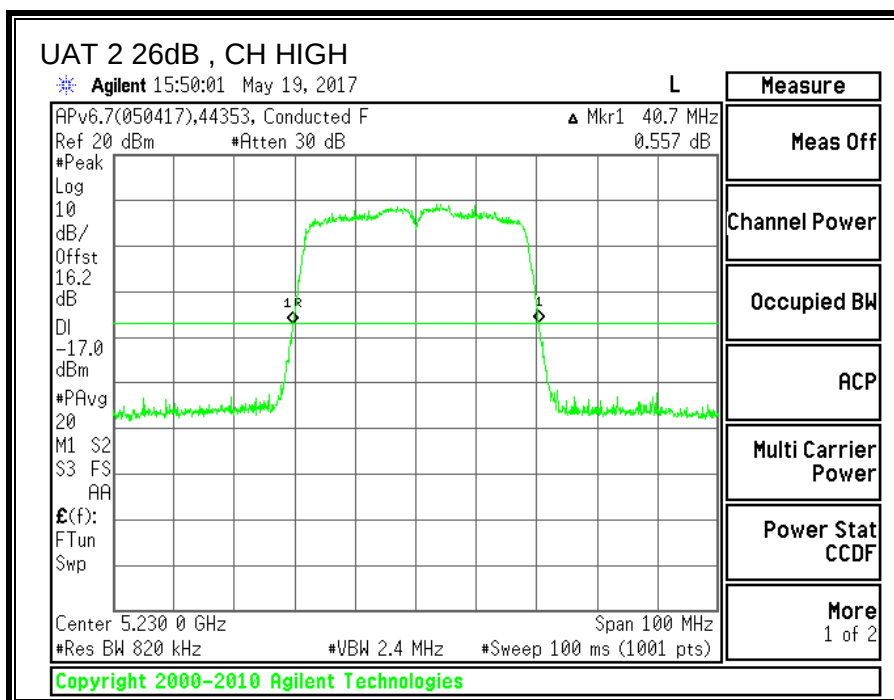



8.6.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Low	5190	36.1649	36.1739
High	5230	36.1804	36.1125

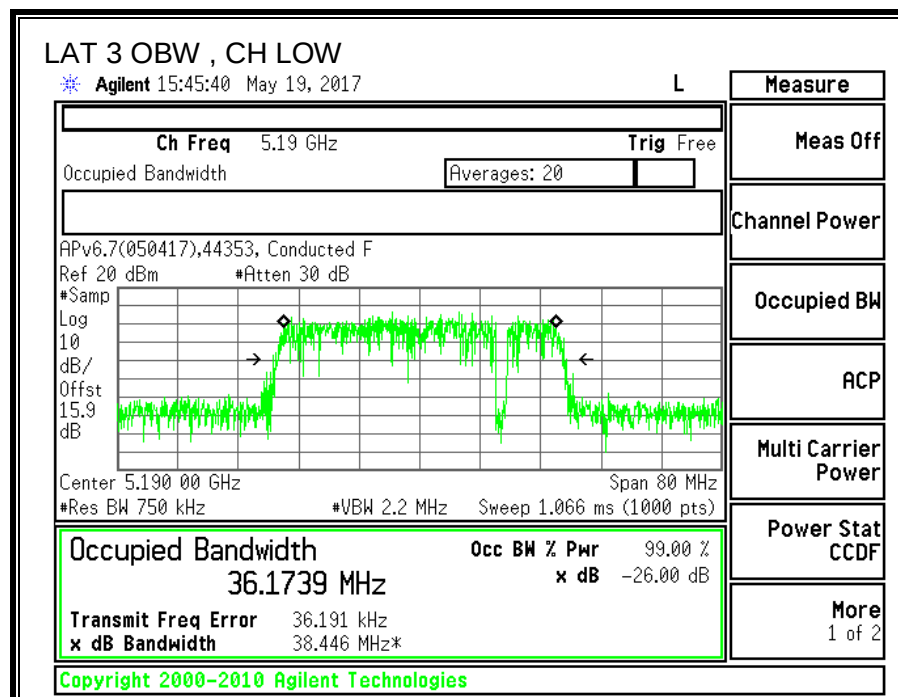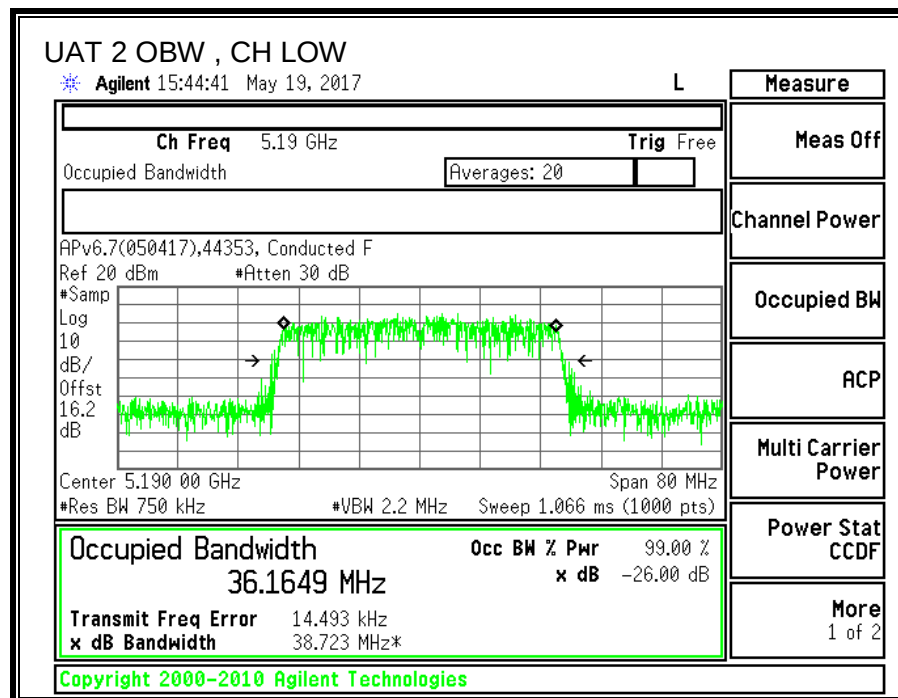

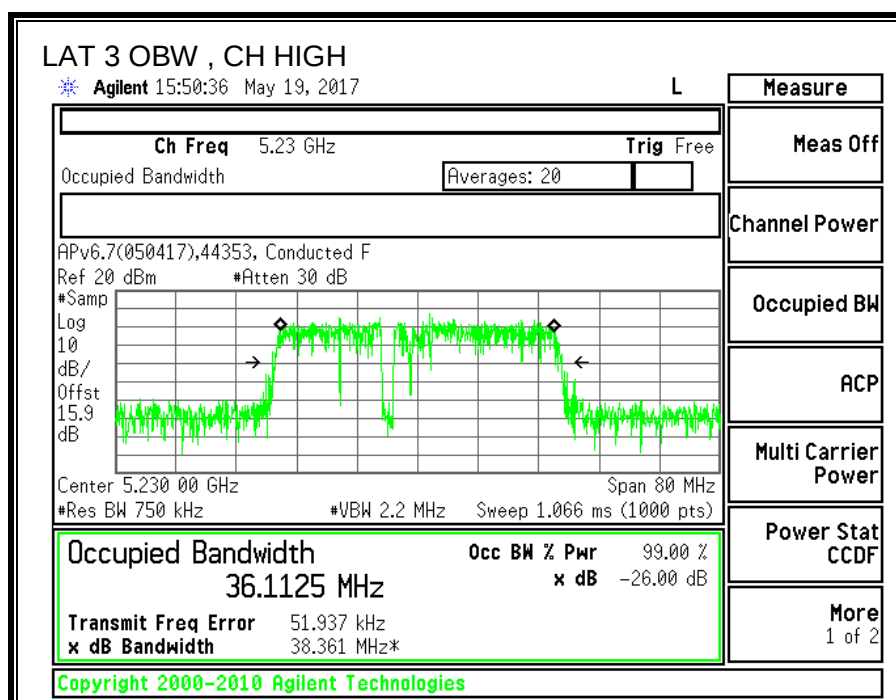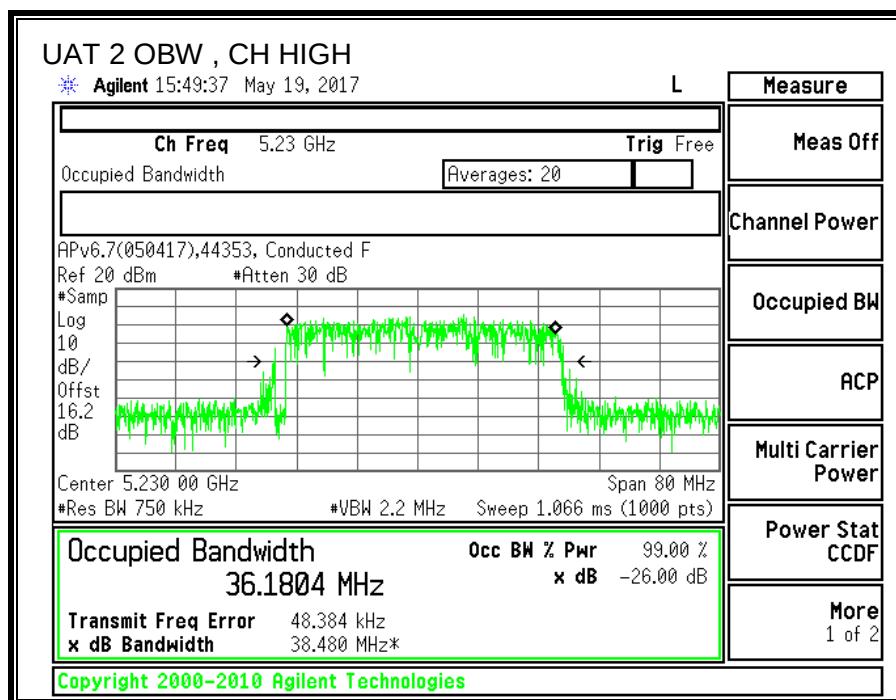

8.6.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Low	5190	16.82	16.88	19.86
High	5230	19.43	19.37	22.41

8.6.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.72	-7.51	-4.49

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-2.72	-7.51	-1.78

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5190	-4.49	-1.78	24.00	11.00
High	5230	-4.49	-1.78	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	16.82	16.88	19.86	24.00	-4.14
High	5230	19.43	19.37	22.41	24.00	-1.59

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/1MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5190	6.56	6.06	9.43	11.00	-1.57
High	5230	6.55	6.06	9.42	11.00	-1.58

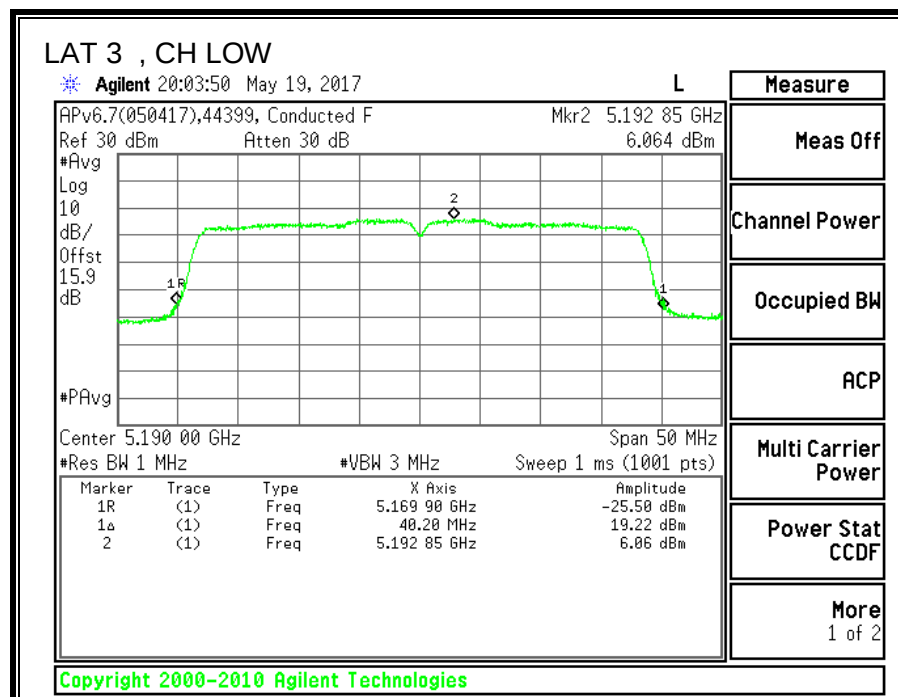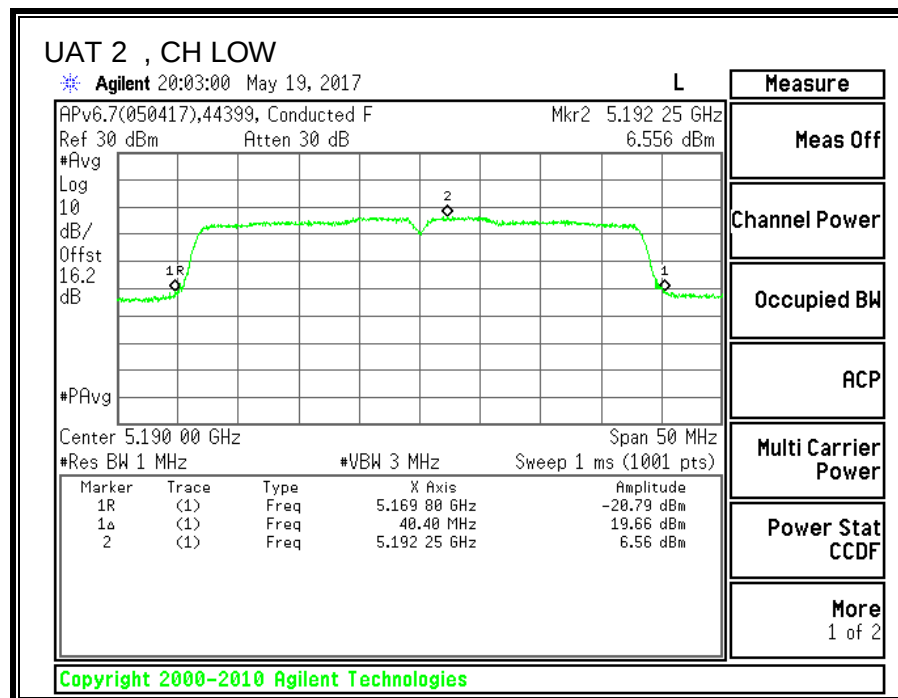

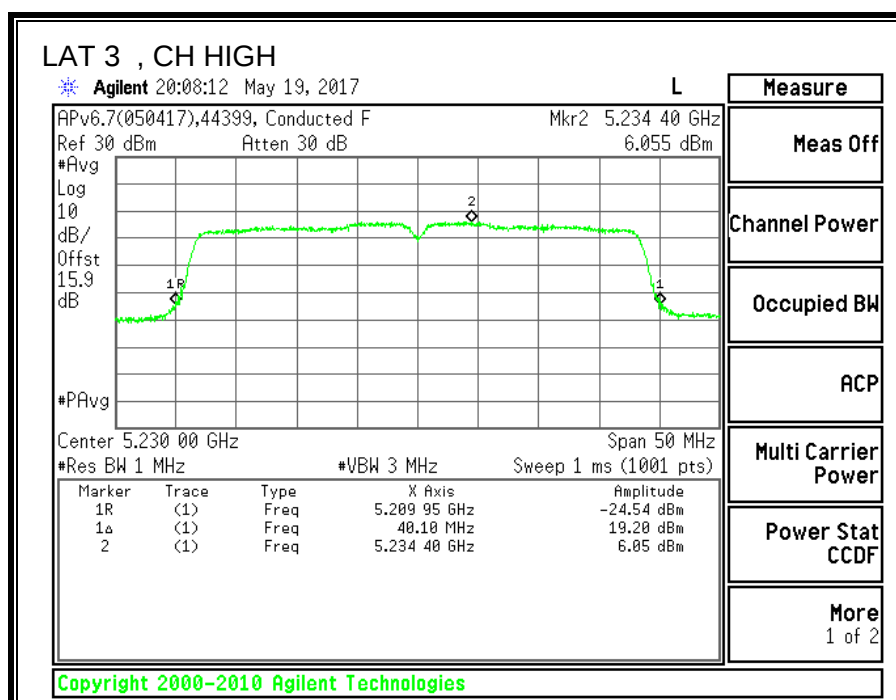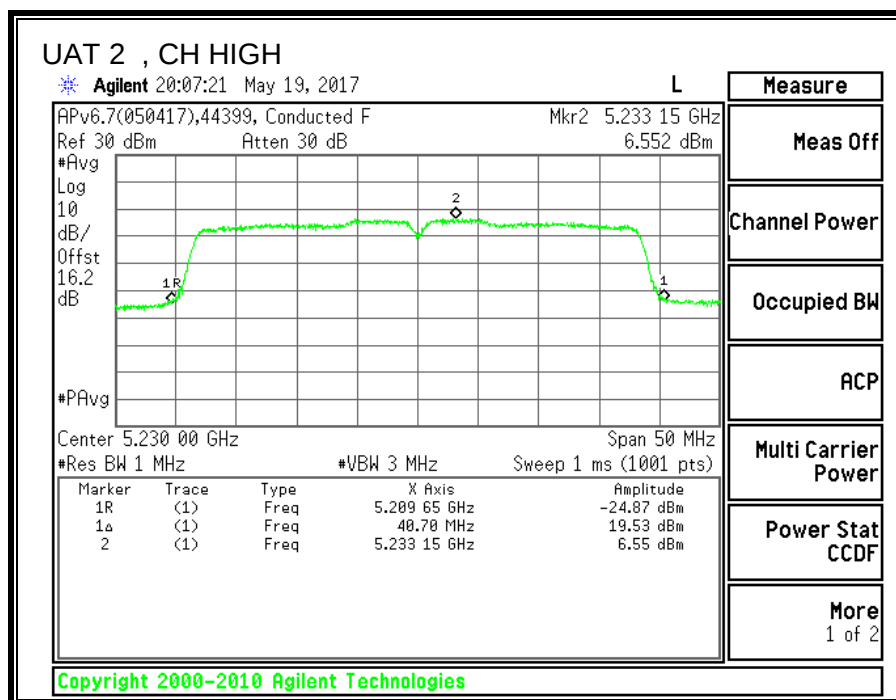

8.7. 11ac HT80 UAT 2 SISO MODE IN THE 5.2GHz BAND


8.7.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Mid	5210	82.4

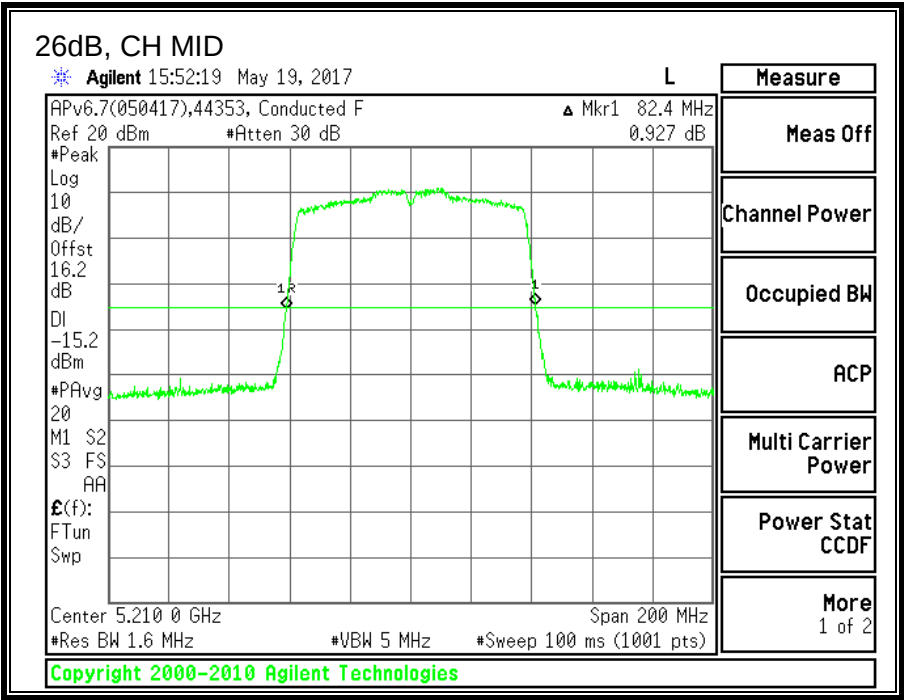


8.7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Mid	5210	75.3548

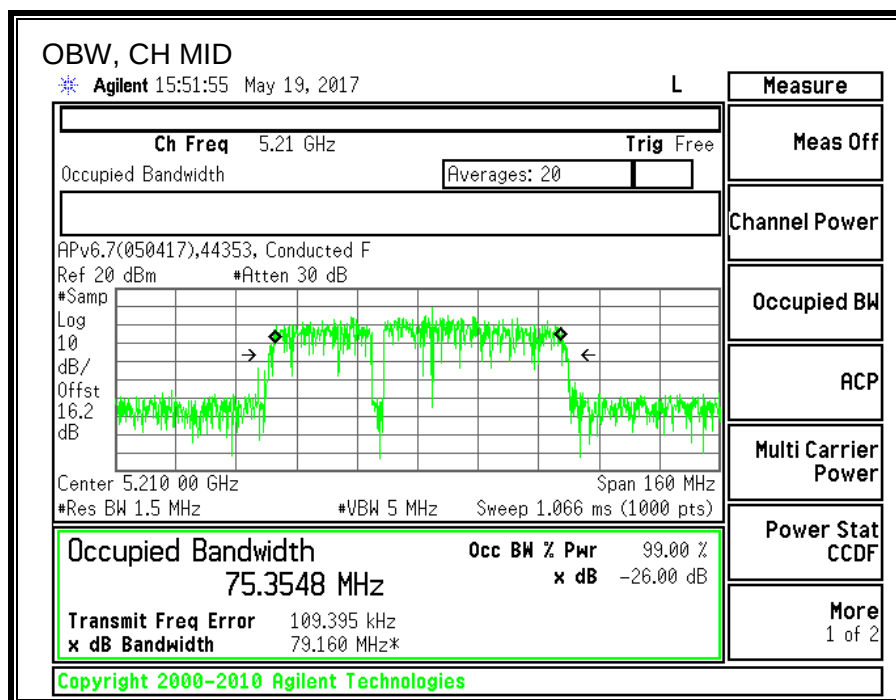

8.7.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Mid	5210	17.46

8.7.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5210	-2.72	-2.72	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	17.46	17.46	24.00	-6.54

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5210	5.23	5.42	11.00	-5.58

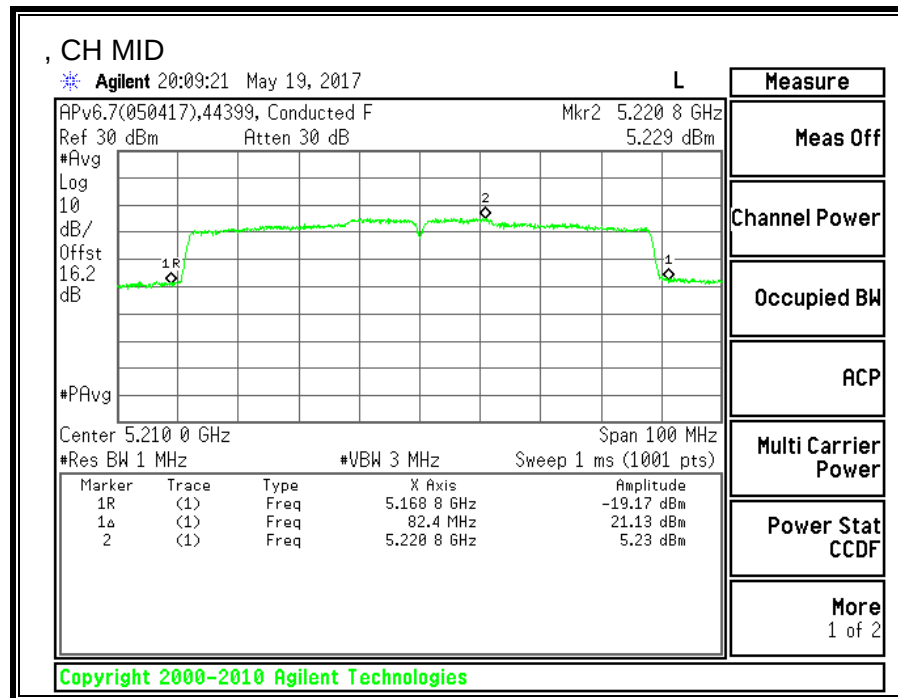

8.8. 11ac HT80 LAT 3 SISO MODE IN THE 5.2GHz BAND


8.8.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Mid	5210	82.4

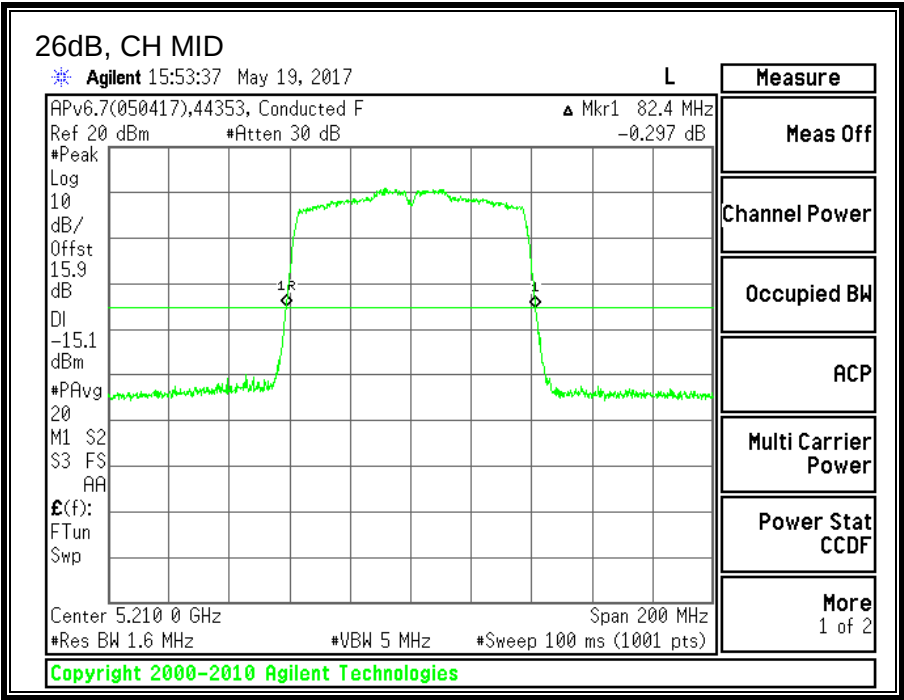


8.8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Mid	5210	74.9809

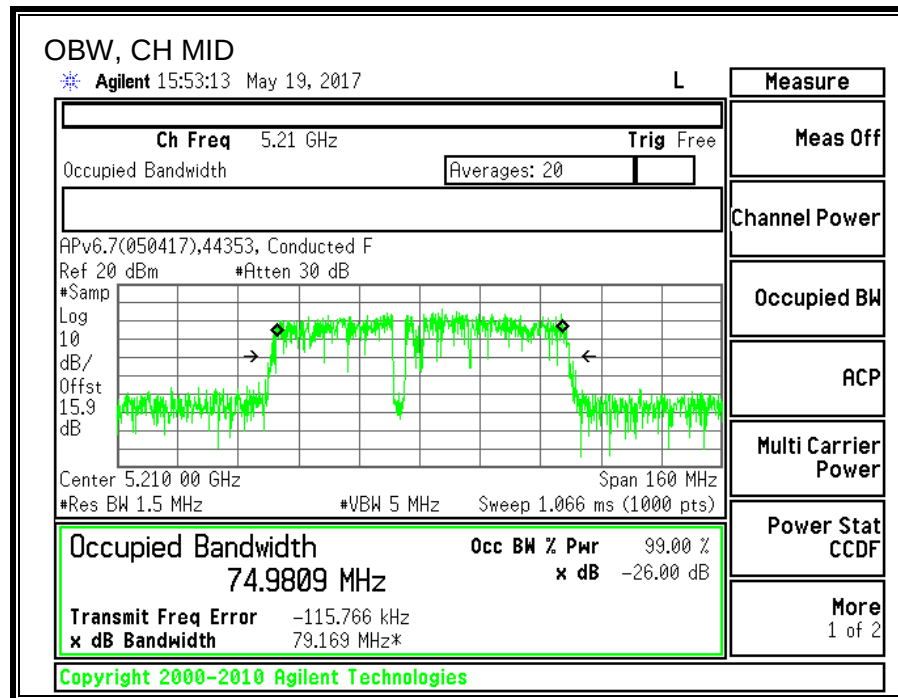

8.8.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Mid	5210	17.42

8.8.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5210	-7.51	-7.51	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	17.42	17.42	24.00	-6.58

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5210	5.20	5.39	11.00	-5.62

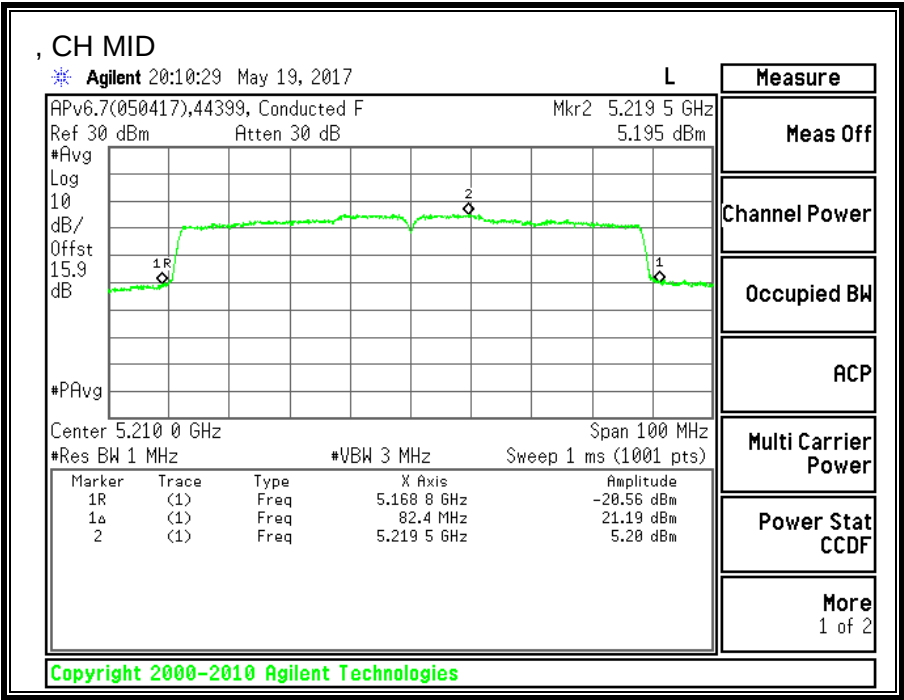

8.9. 11ac HT80 2TX CDD MIMO MODE IN THE 5.2GHz BAND



8.9.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Mid	5210	82.4	82.2

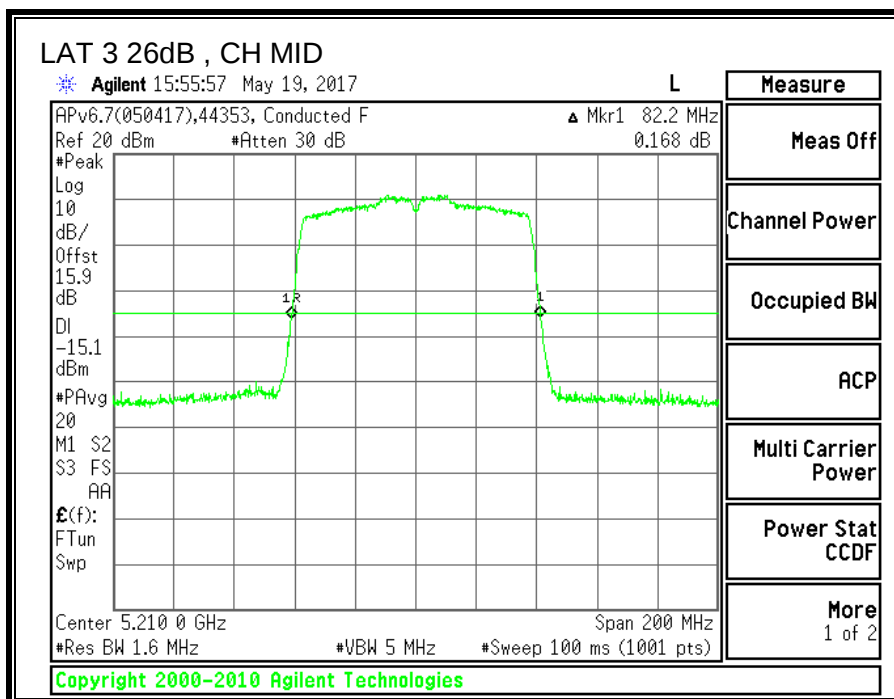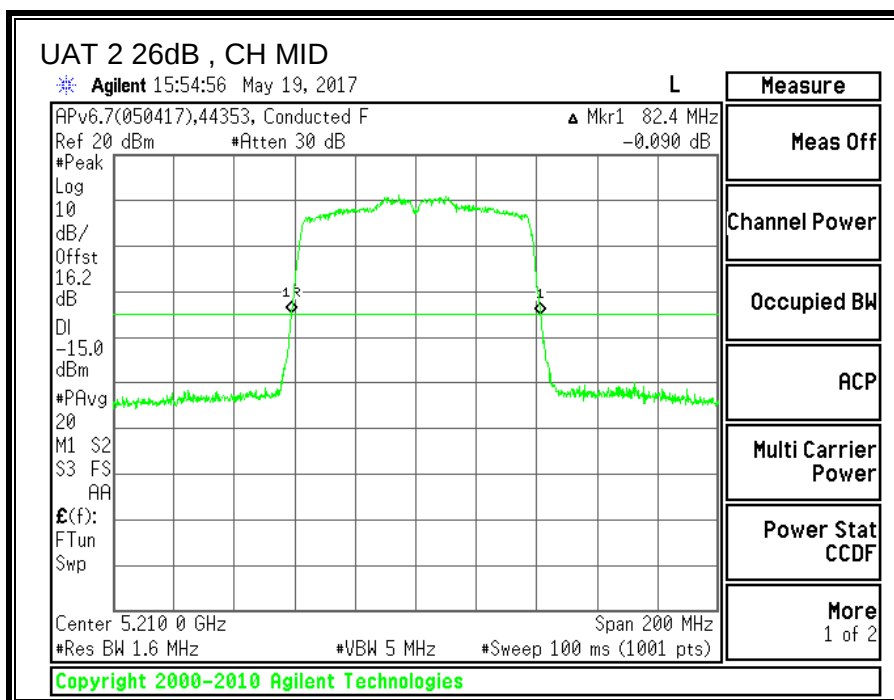



8.9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Mid	5210	75.0861	75.1892

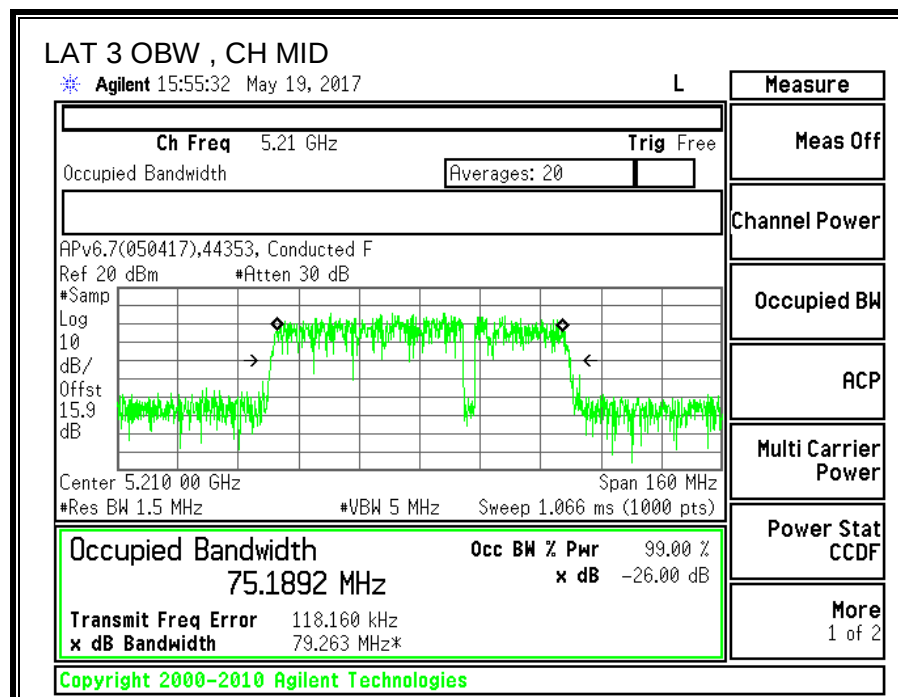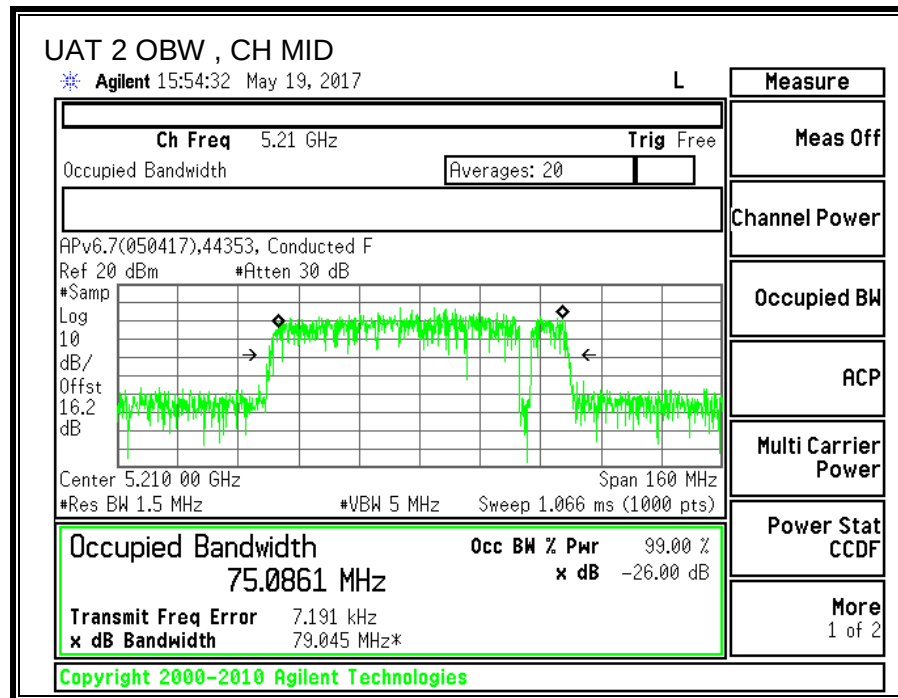

8.9.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Mid	5210	16.42	16.37	19.41

8.9.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.72	-7.51	-4.49

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-2.72	-7.51	-1.78

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5210	-4.49	-1.78	24.00	11.00



Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	16.42	16.37	19.41	24.00	-4.59

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/1MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5210	4.15	3.56	7.07	11.00	-3.93

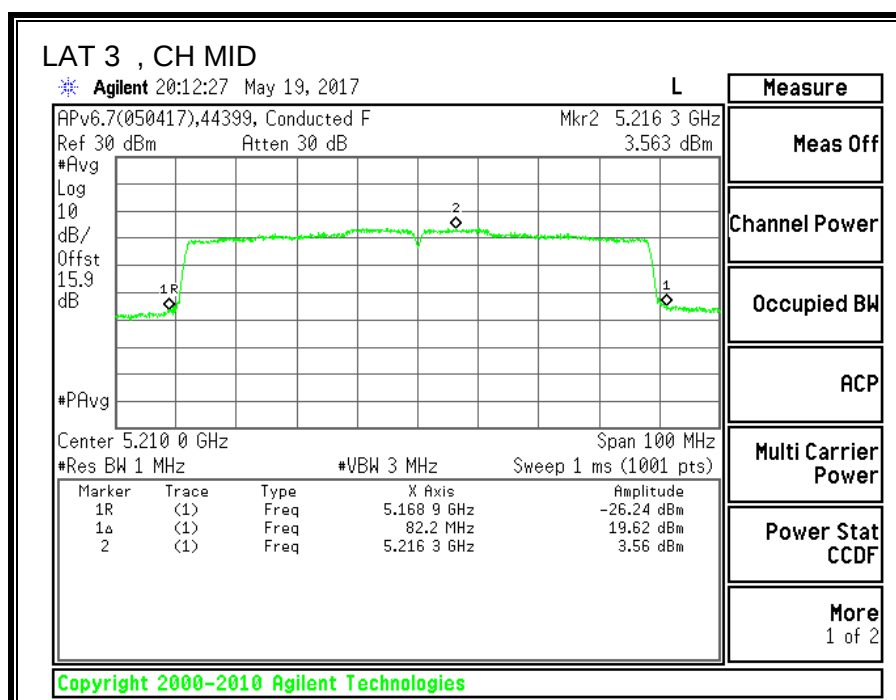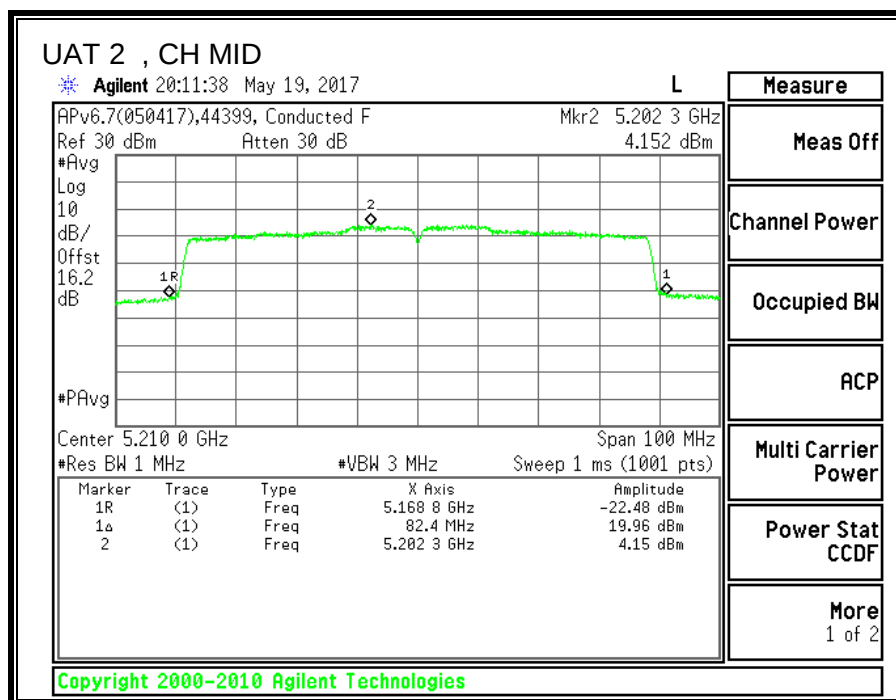

8.10. 11n HT20 UAT 2 SISO MODE IN THE 5.3GHz BAND



8.10.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5260	21.9
Mid	5300	22.1
High	5320	21.9

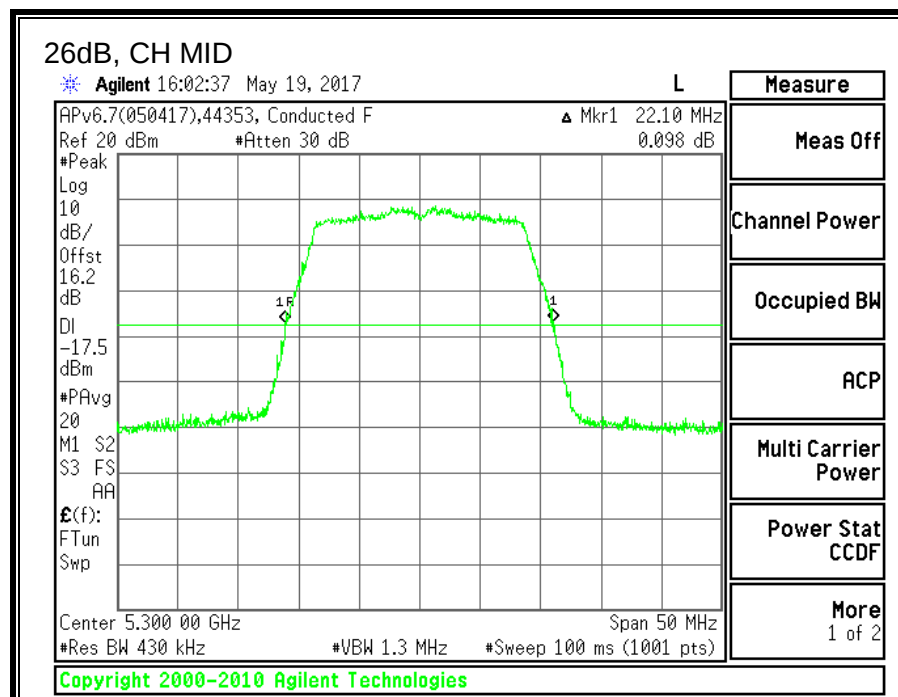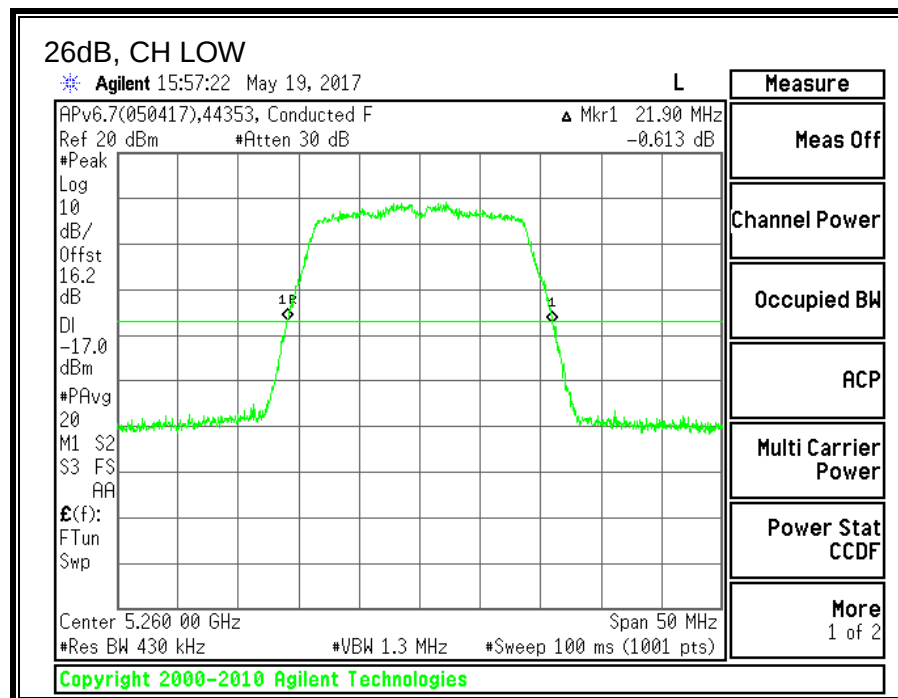

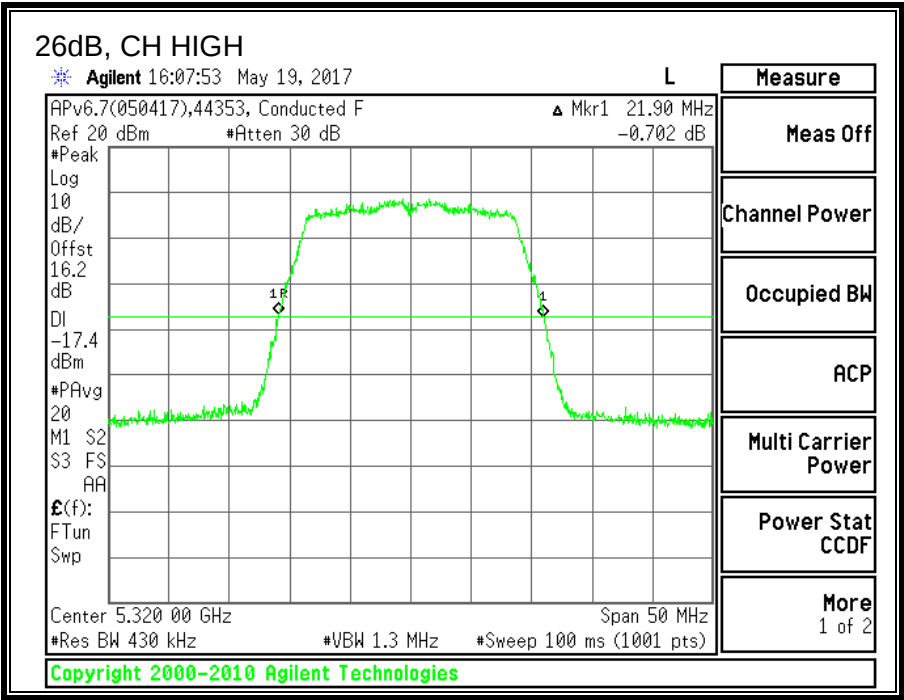



8.10.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Low	5260	17.7032
Mid	5300	17.7017
High	5320	17.7083

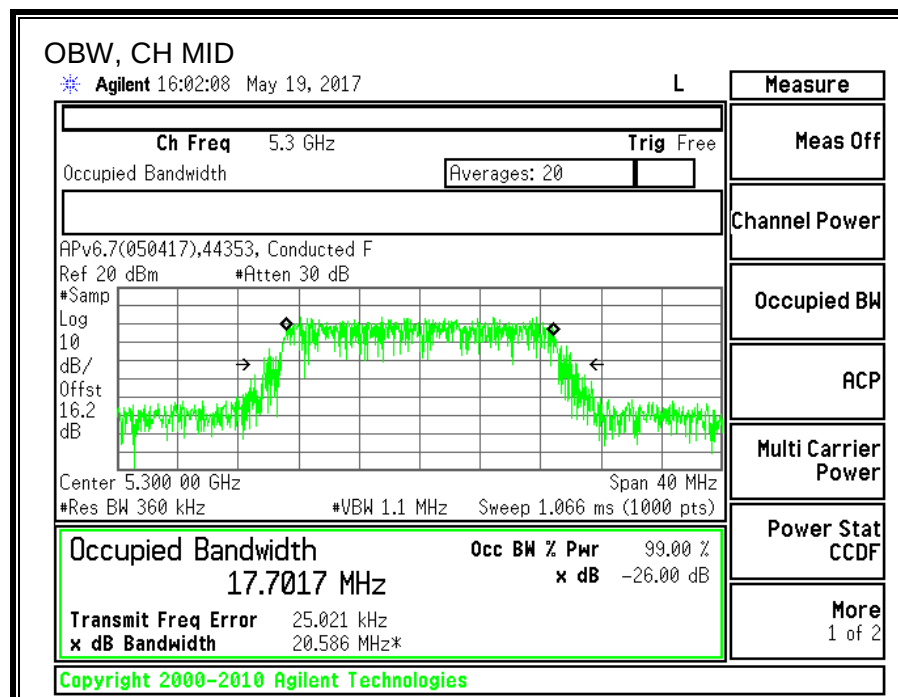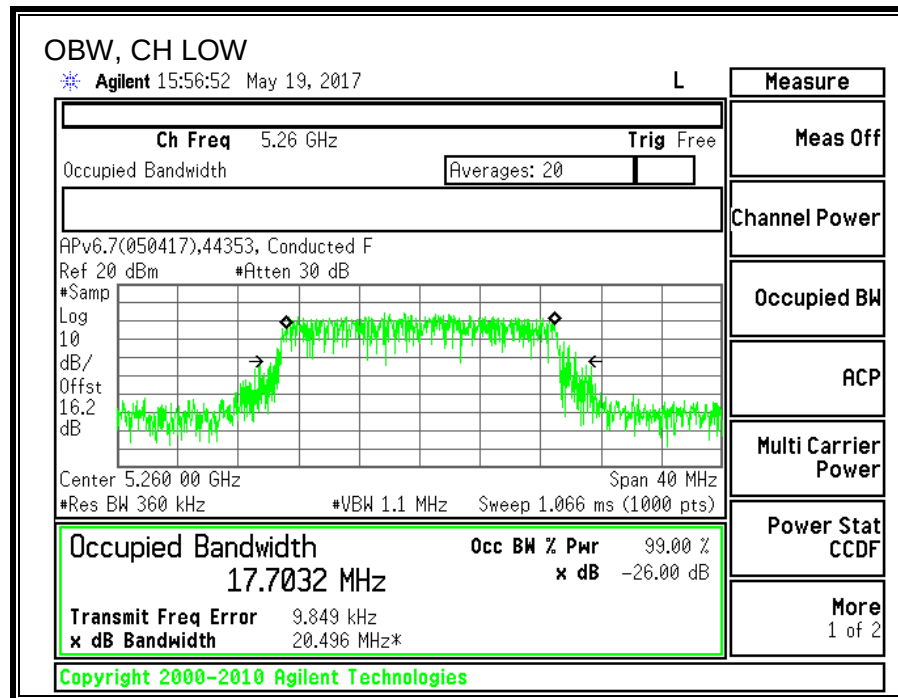

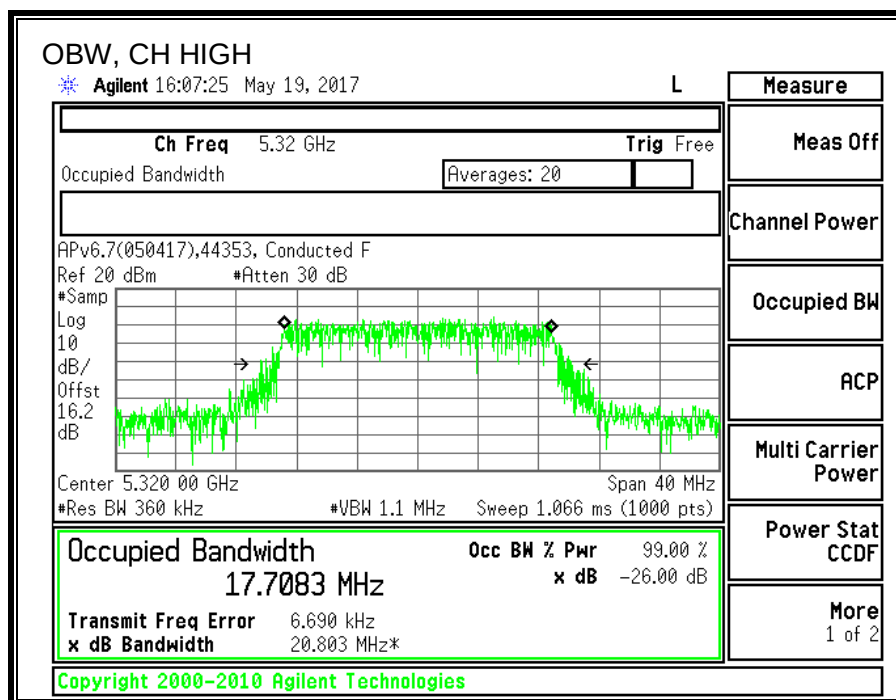

8.10.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Low	5260	20.95
Mid	5300	20.87
High	5320	18.85

8.10.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.900	17.703	-3.27	23.48	11.00
Mid	5300	22.100	17.702	-3.27	23.48	11.00
High	5320	21.900	17.708	-3.27	23.48	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.95	20.95	23.48	-2.53
Mid	5300	20.87	20.87	23.48	-2.61
High	5320	18.85	18.85	23.48	-4.63

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	10.91	10.91	11.00	-0.09
Mid	5300	10.82	10.82	11.00	-0.18
High	5320	9.76	9.76	11.00	-1.24

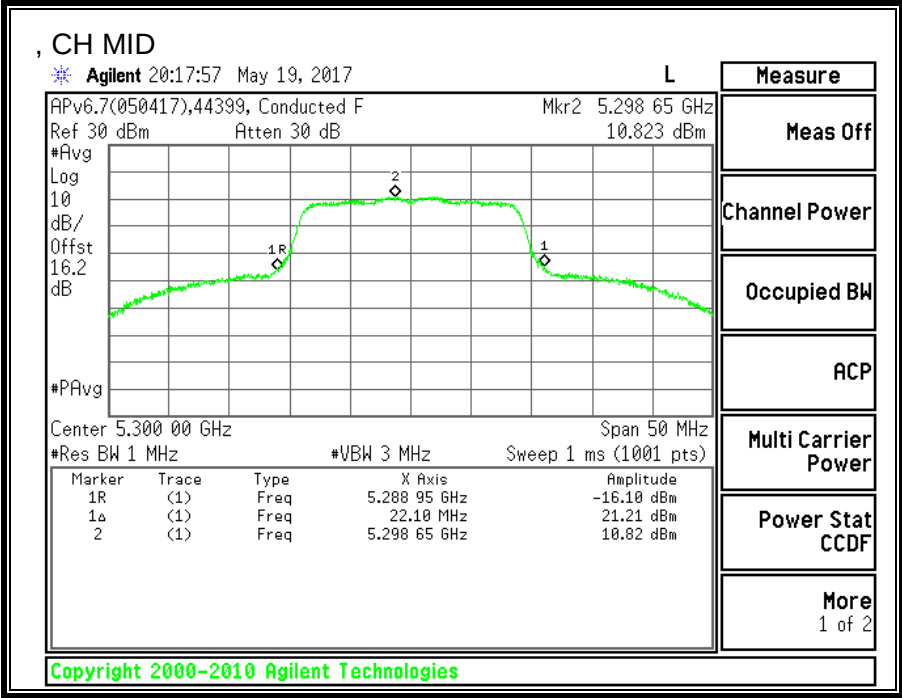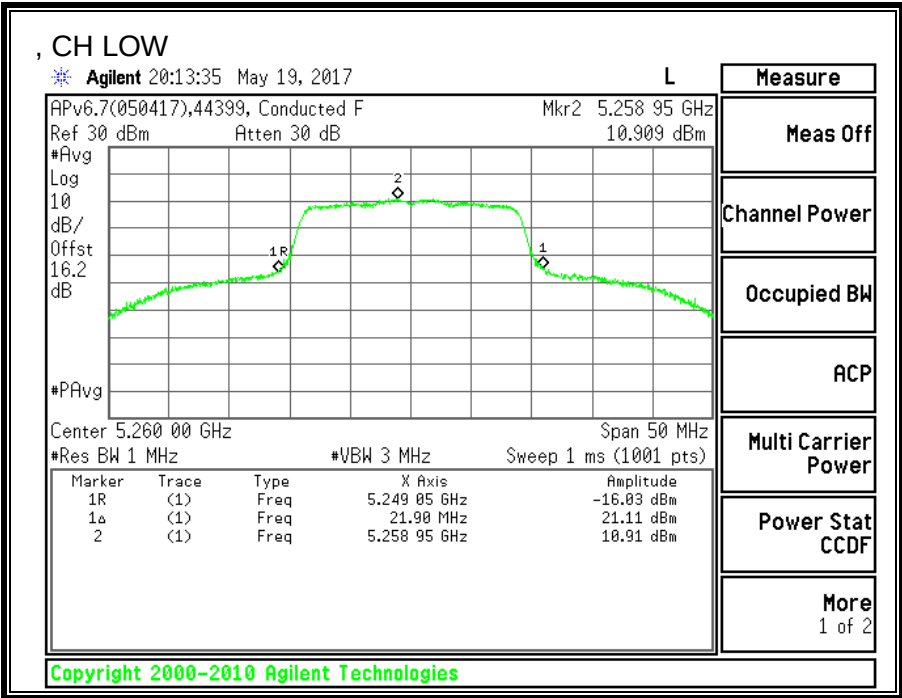

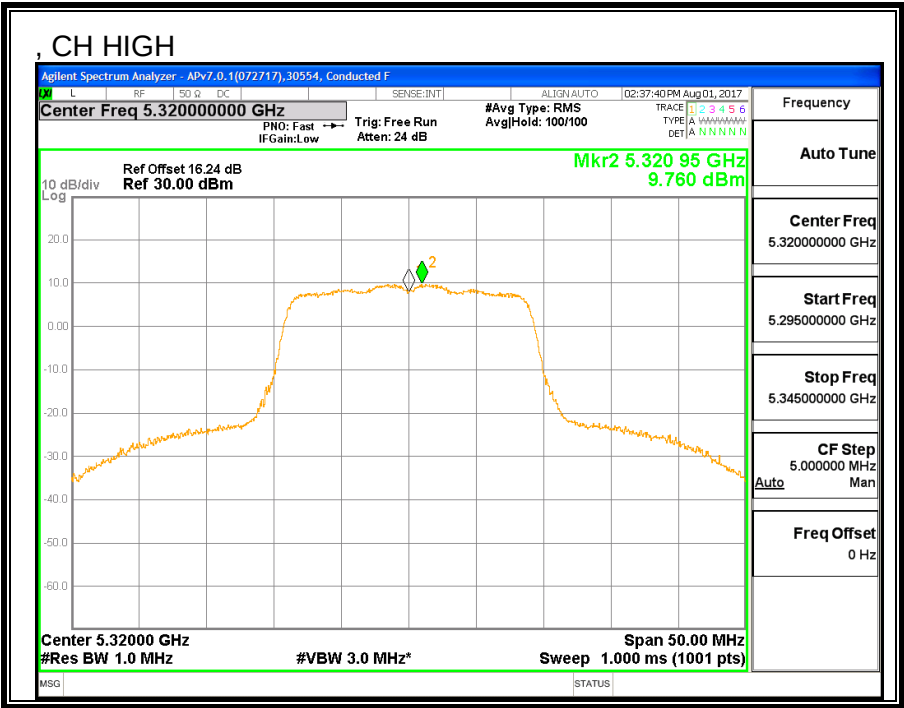

8.11. 11n HT20 LAT 3 SISO MODE IN THE 5.3GHz BAND



8.11.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5260	22.15
Mid	5300	22.00
High	5320	22.10

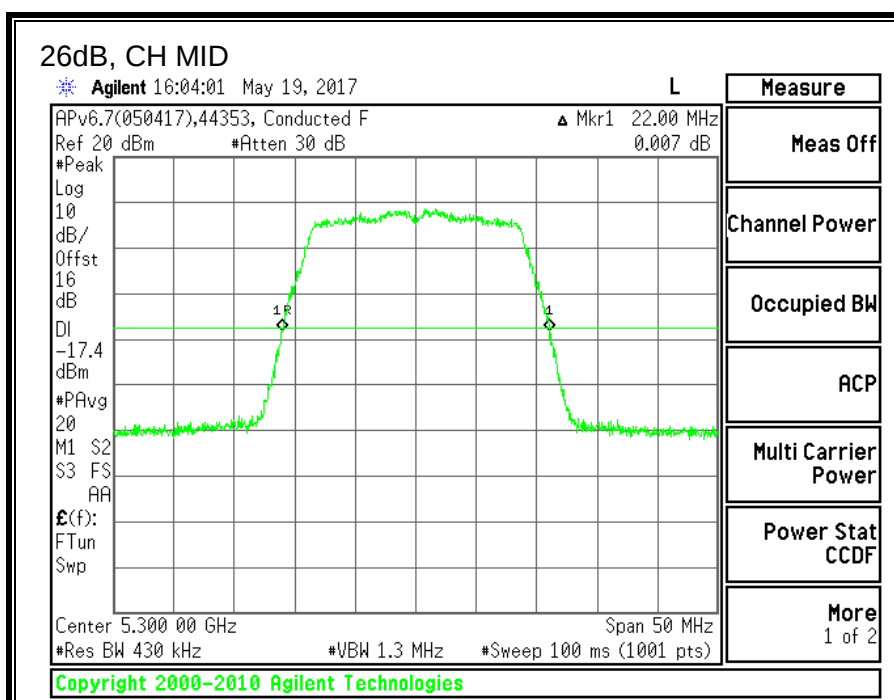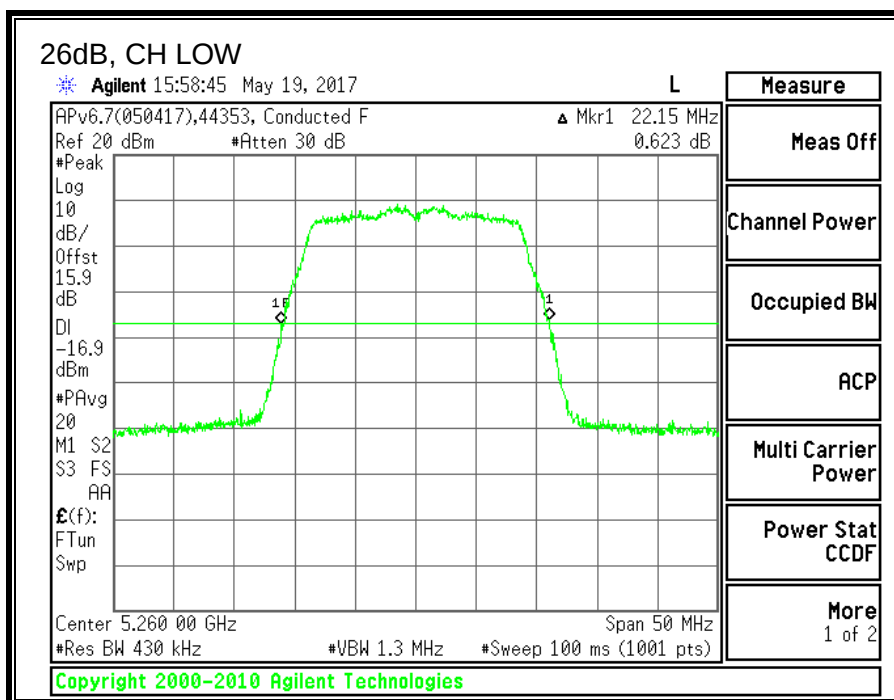

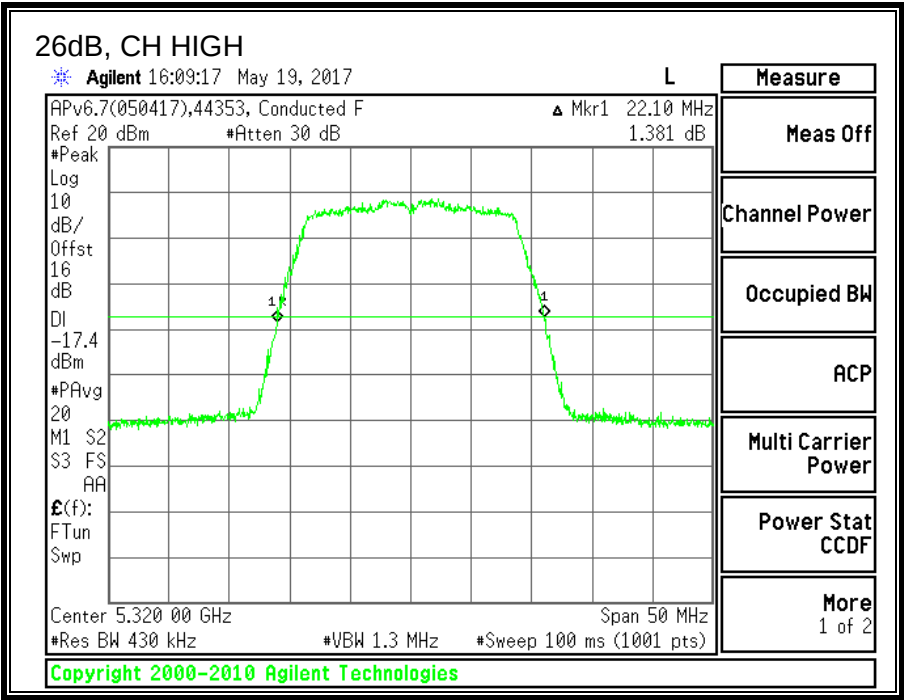



8.11.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Low	5260	17.6390
Mid	5300	17.6772
High	5320	17.6931

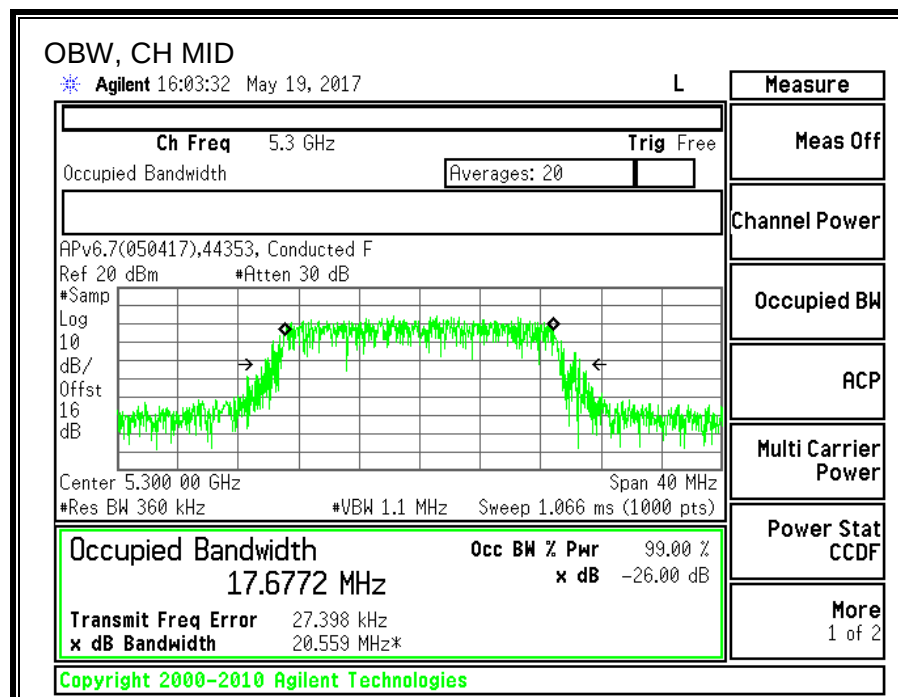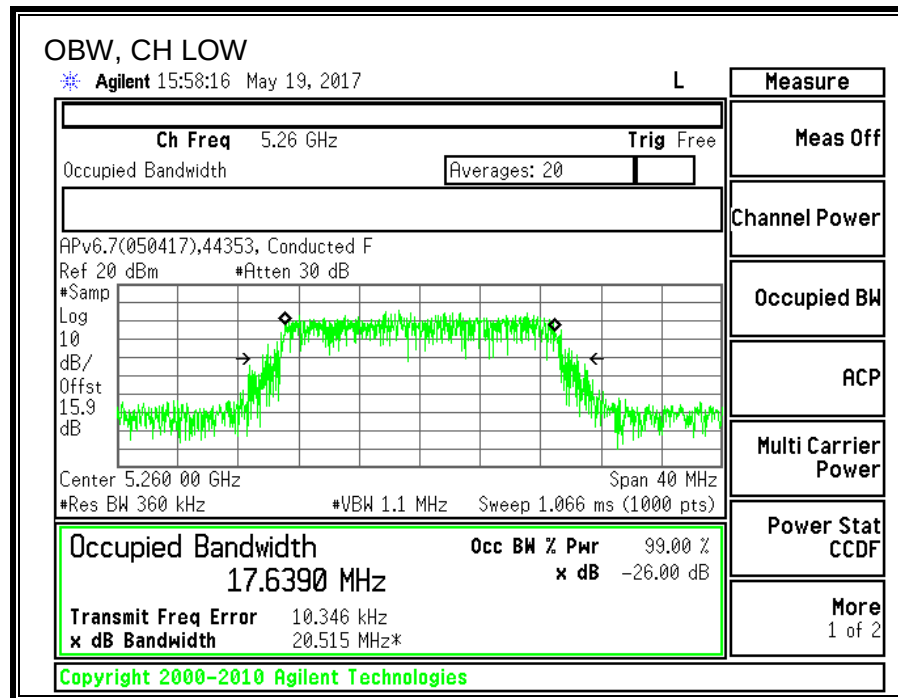

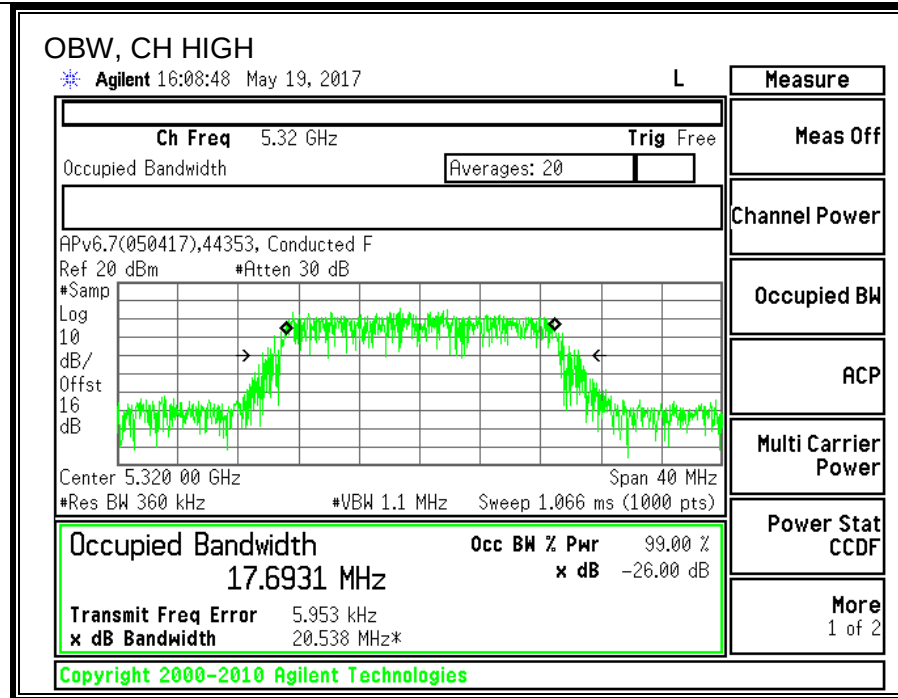

8.11.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Low	5260	20.91
Mid	5300	20.81
High	5320	18.79

8.11.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	22.150	17.639	-6.98	23.46	11.00
Mid	5300	22.000	17.677	-6.98	23.47	11.00
High	5320	22.100	17.693	-6.98	23.48	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.91	20.91	23.46	-2.55
Mid	5300	20.81	20.81	23.47	-2.66
High	5320	18.79	18.79	23.48	-4.69

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	10.73	10.73	11.00	-0.28
Mid	5300	10.95	10.95	11.00	-0.05
High	5320	10.84	10.84	11.00	-0.16

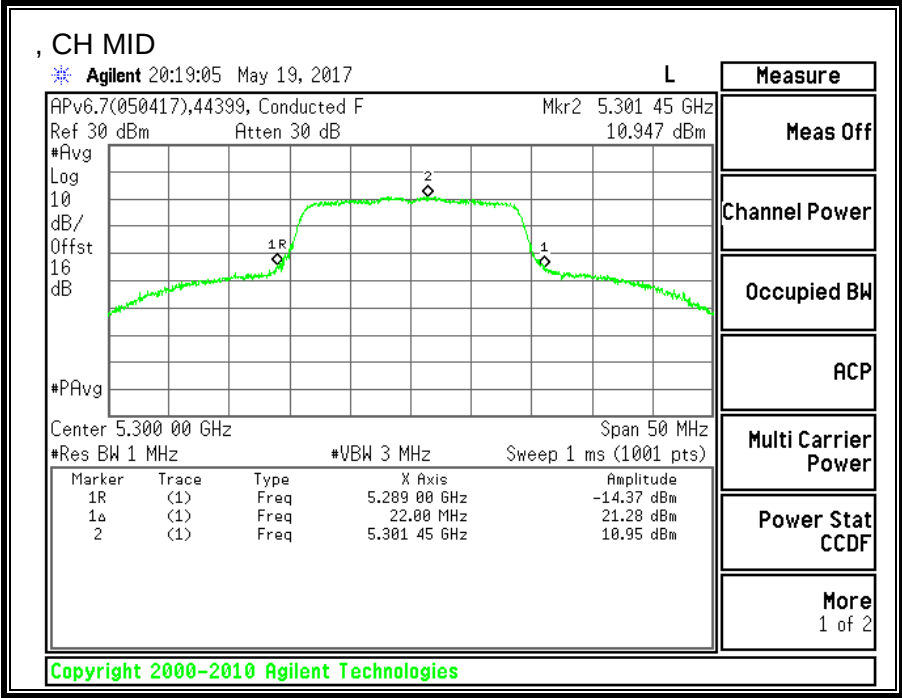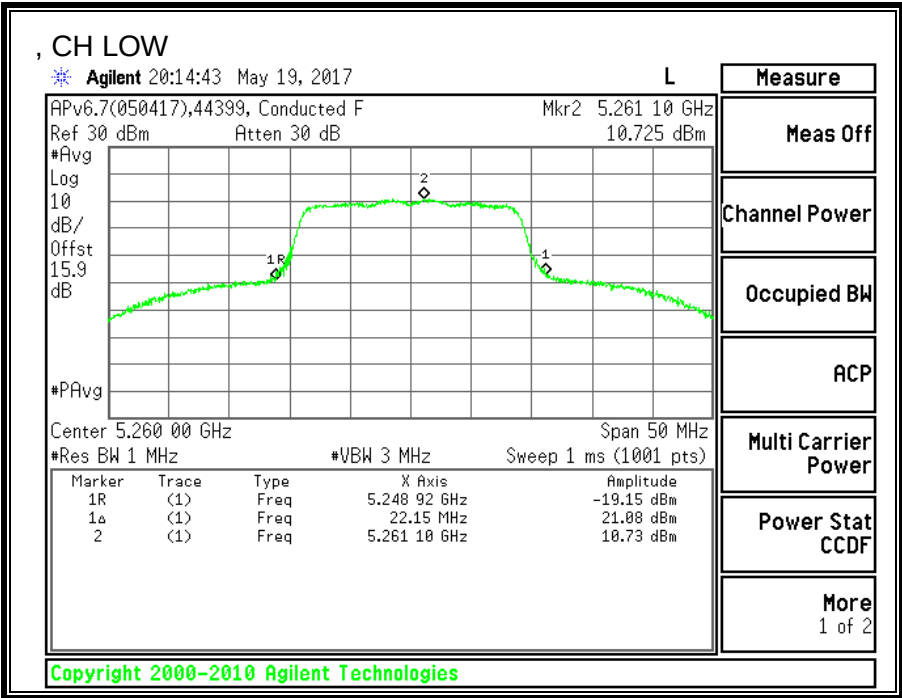

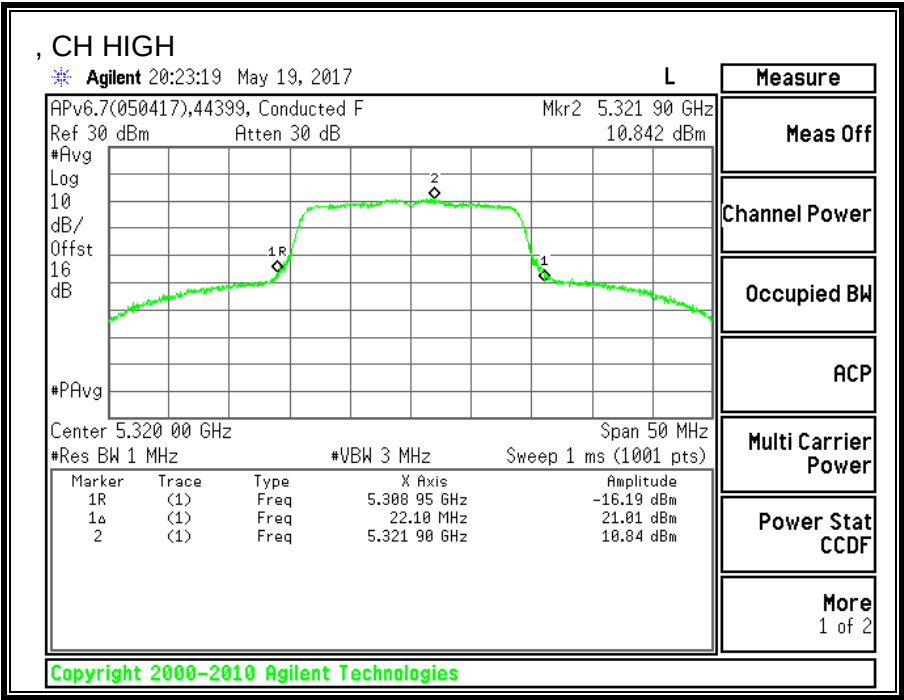

8.12. 11n HT20 2TX CDD MIMO MODE IN THE 5.3GHz BAND



8.12.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Low	5260	22.00	21.60
Mid	5300	21.95	21.55
High	5320	22.00	21.75

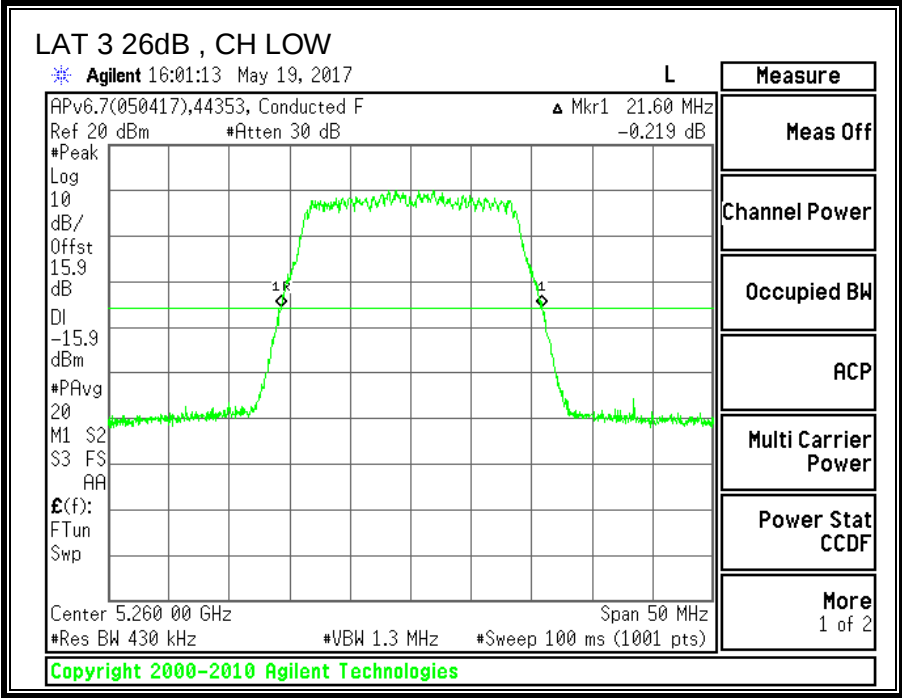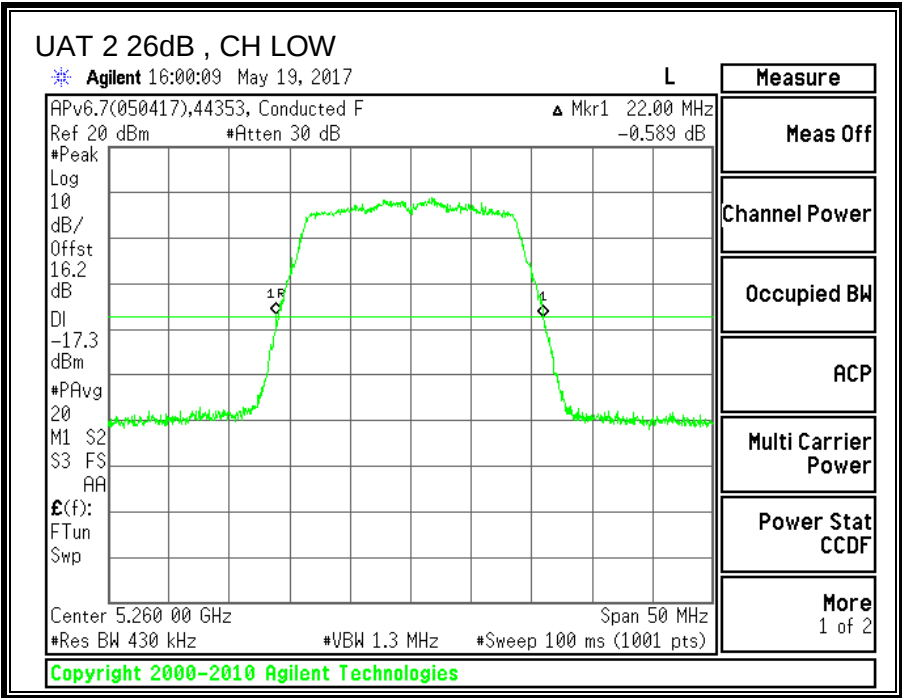

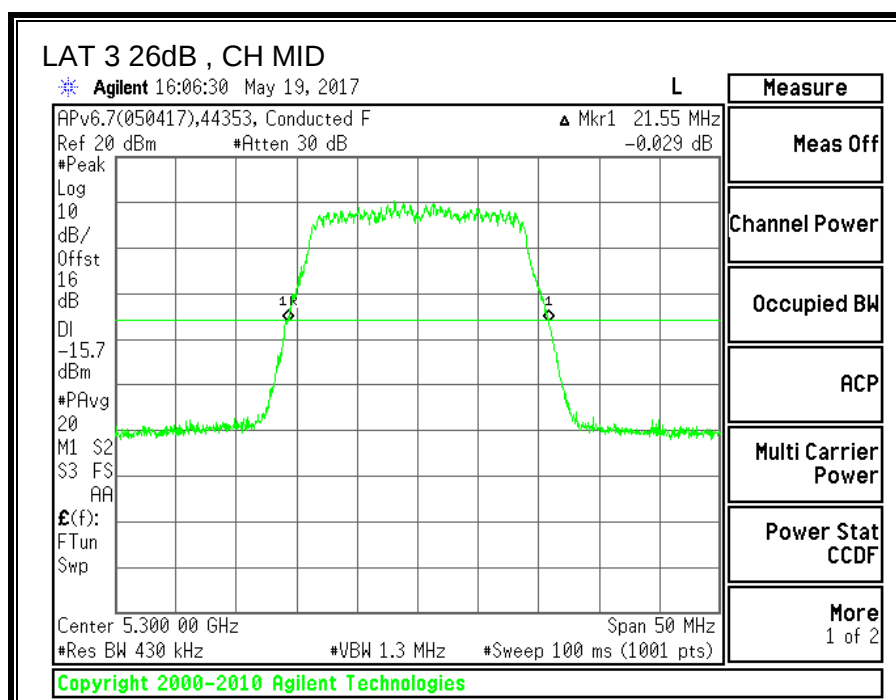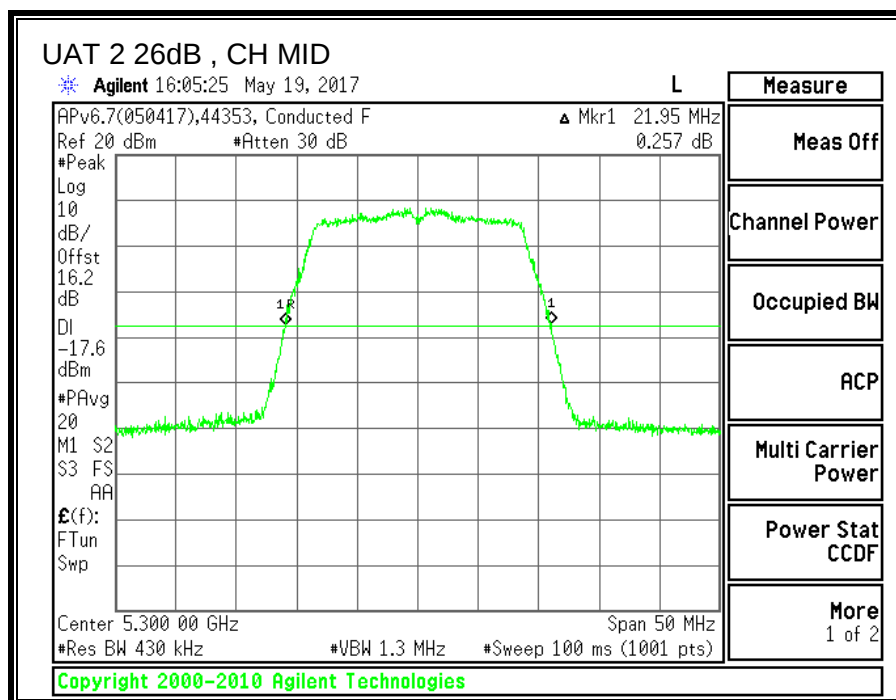

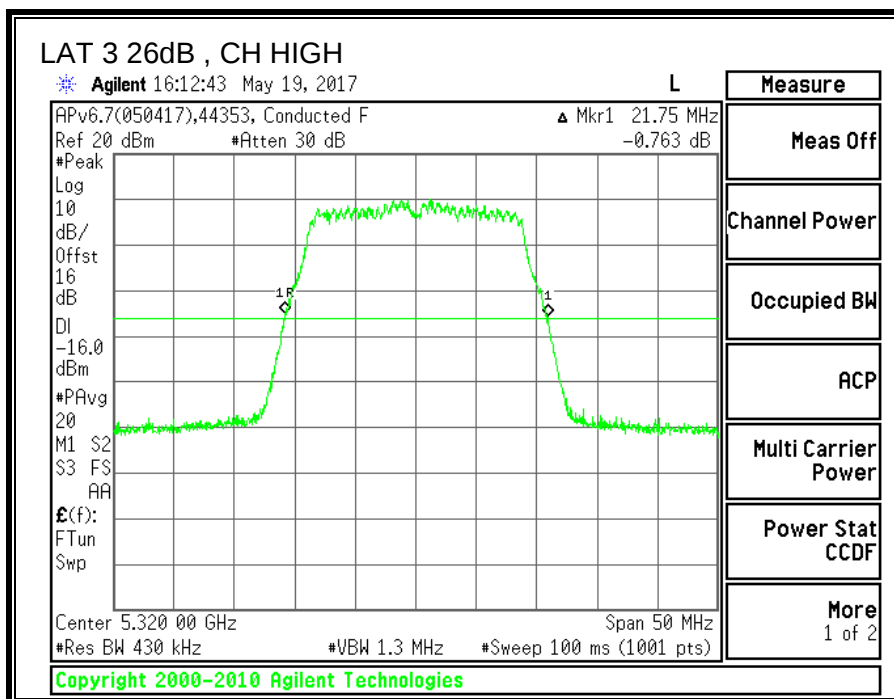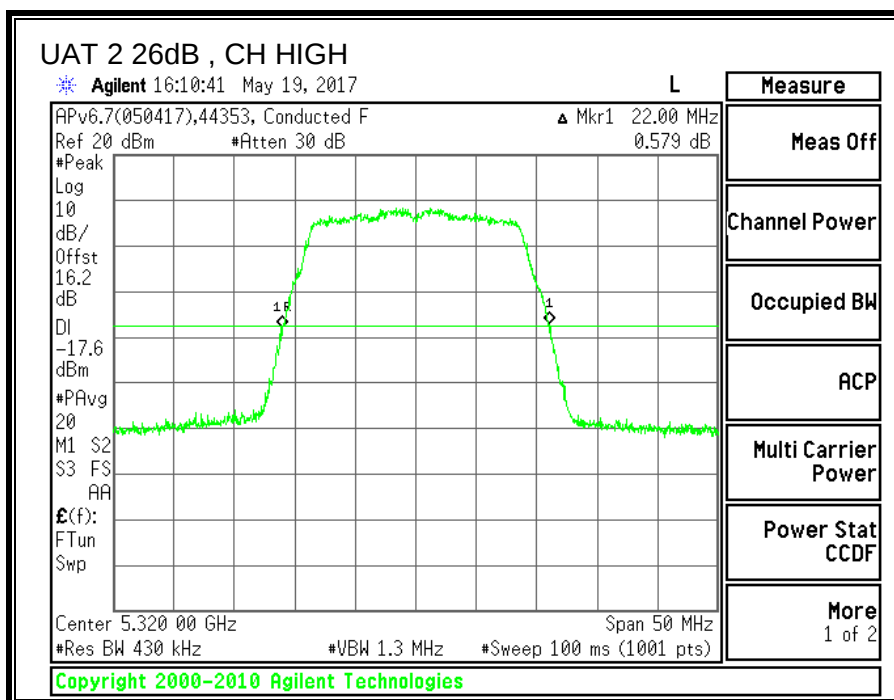



8.12.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Low	5260	17.6008	17.6661
Mid	5300	17.6812	17.6197
High	5320	17.7047	17.7016

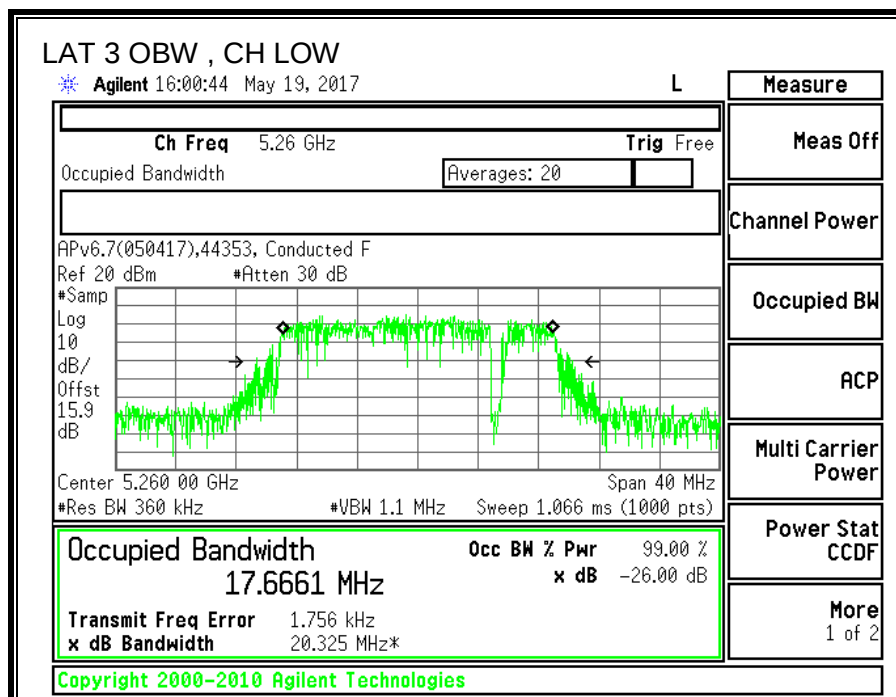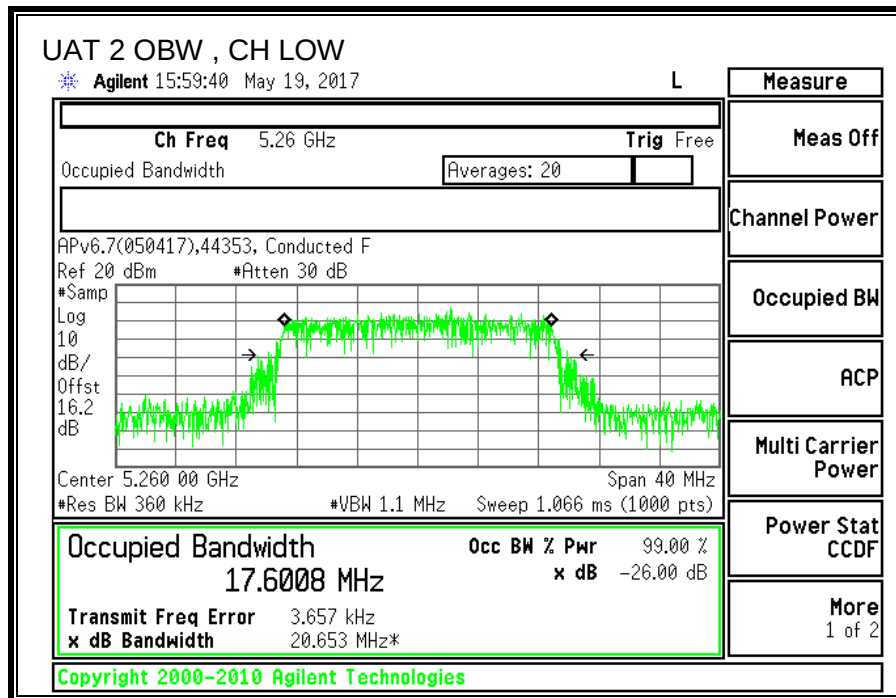

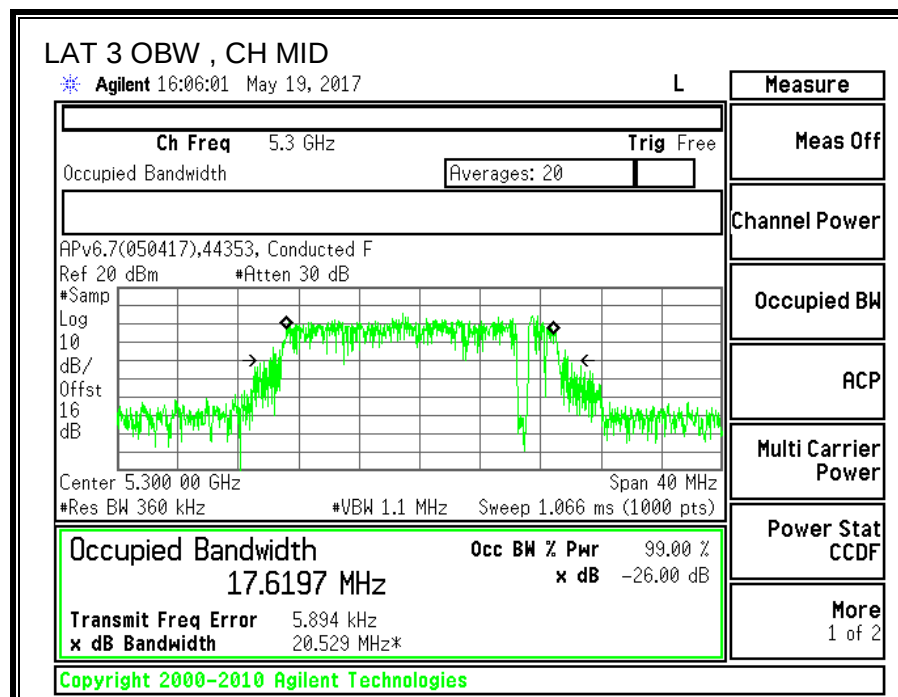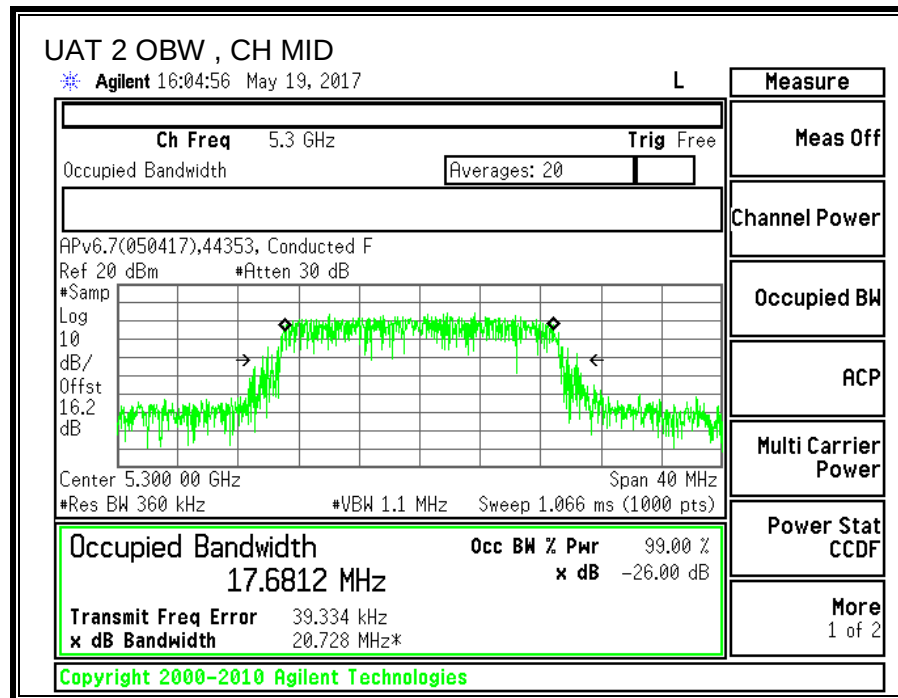

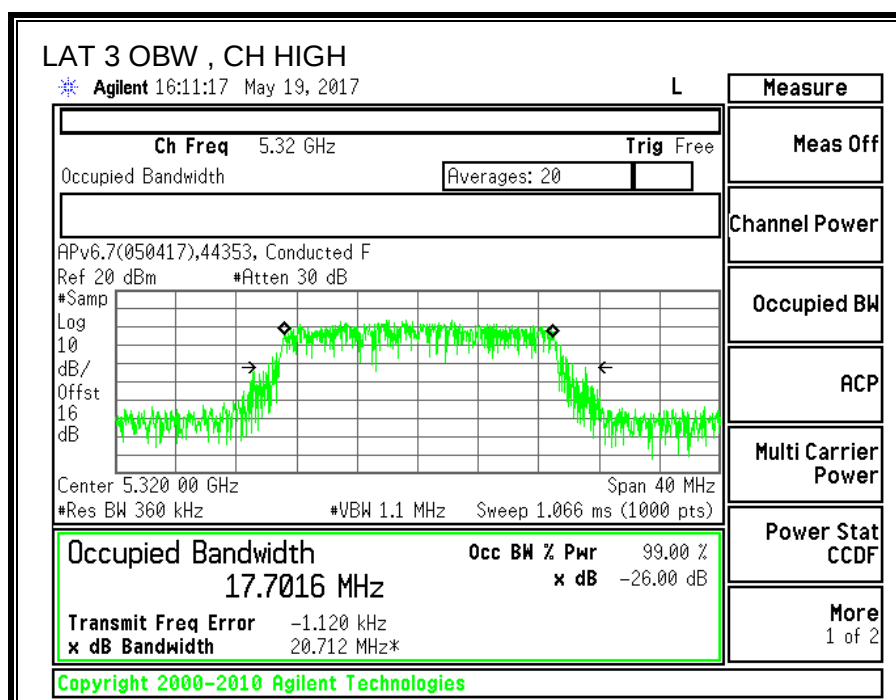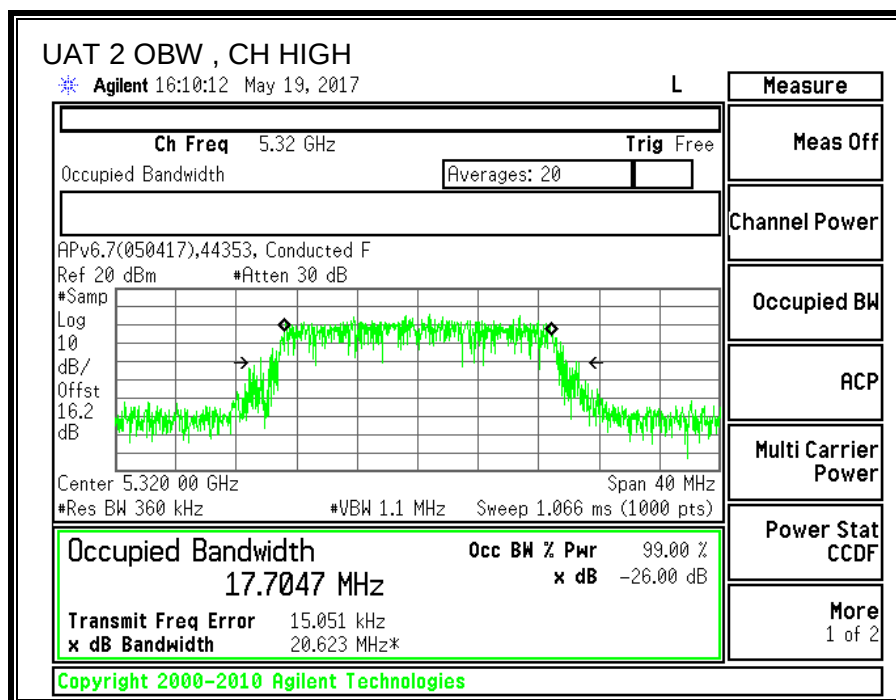

8.12.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Low	5260	17.86	17.79	20.84
Mid	5300	17.93	17.85	20.90
High	5320	17.89	17.92	20.92

8.12.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-3.27	-6.98	-4.74

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-3.27	-6.98	-1.92

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.60	17.601	-4.74	-1.92	23.46	11.00
Mid	5300	21.55	17.620	-4.74	-1.92	23.46	11.00
High	5320	21.75	17.702	-4.74	-1.92	23.48	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results



Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	17.86	17.79	20.84	23.46	-2.62
Mid	5300	17.93	17.85	20.90	23.46	-2.56
High	5320	17.89	17.92	20.92	23.48	-2.56

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/1MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	7.73	7.75	10.75	11.00	-0.25
Mid	5300	7.85	7.70	10.79	11.00	-0.21
High	5320	7.85	7.68	10.78	11.00	-0.22

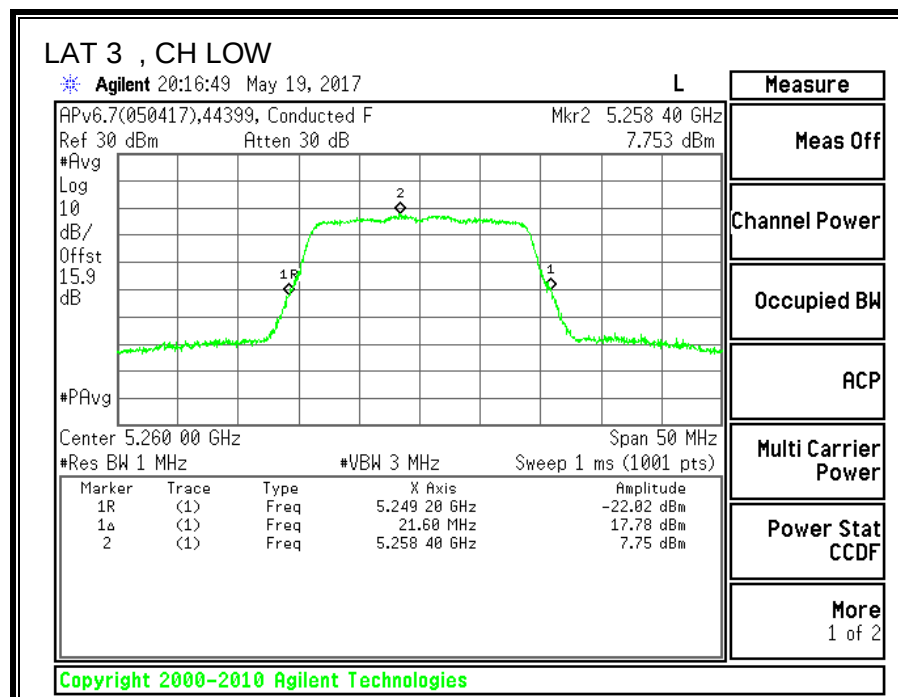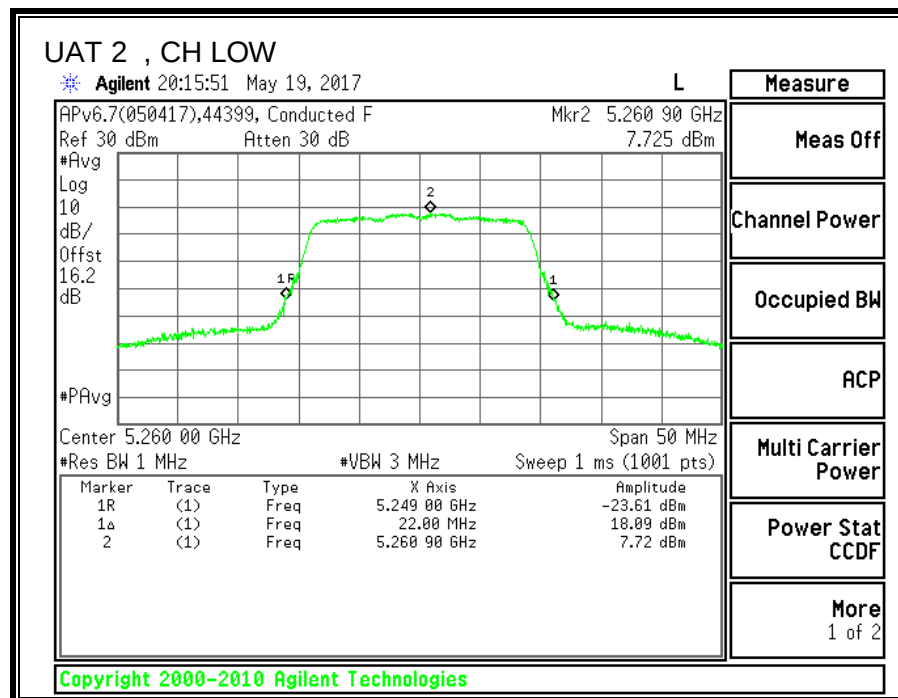

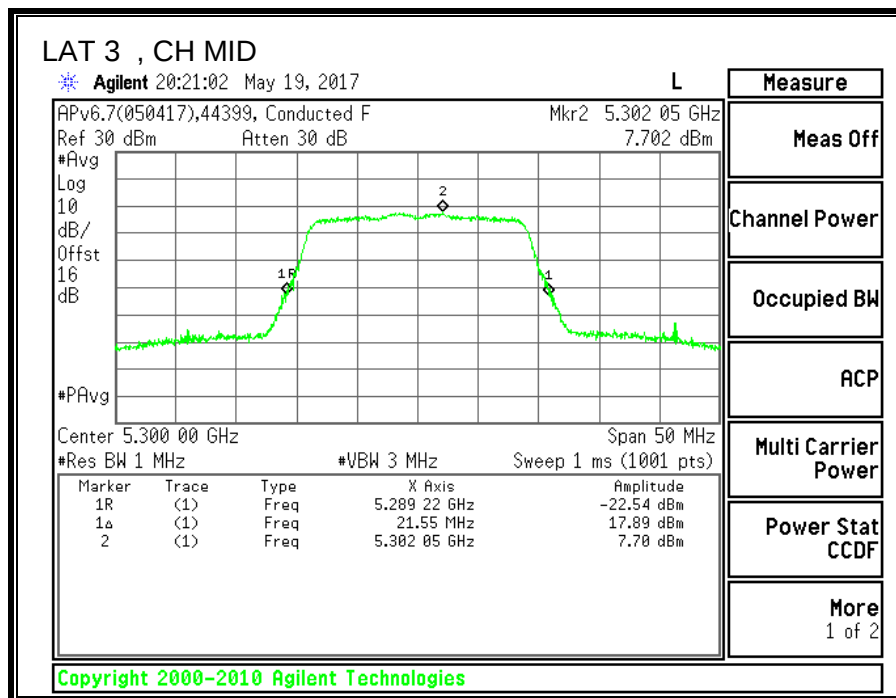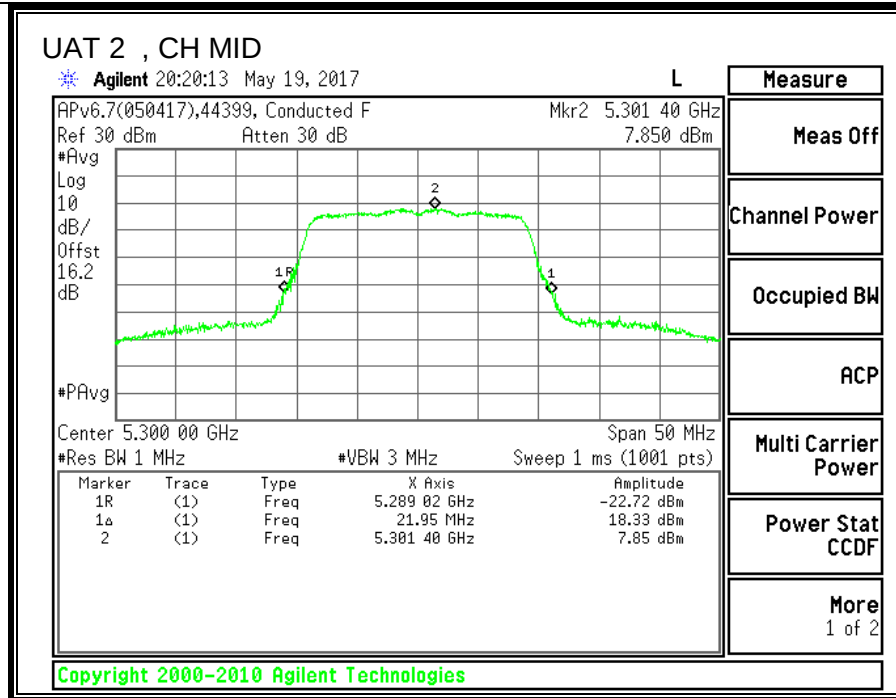

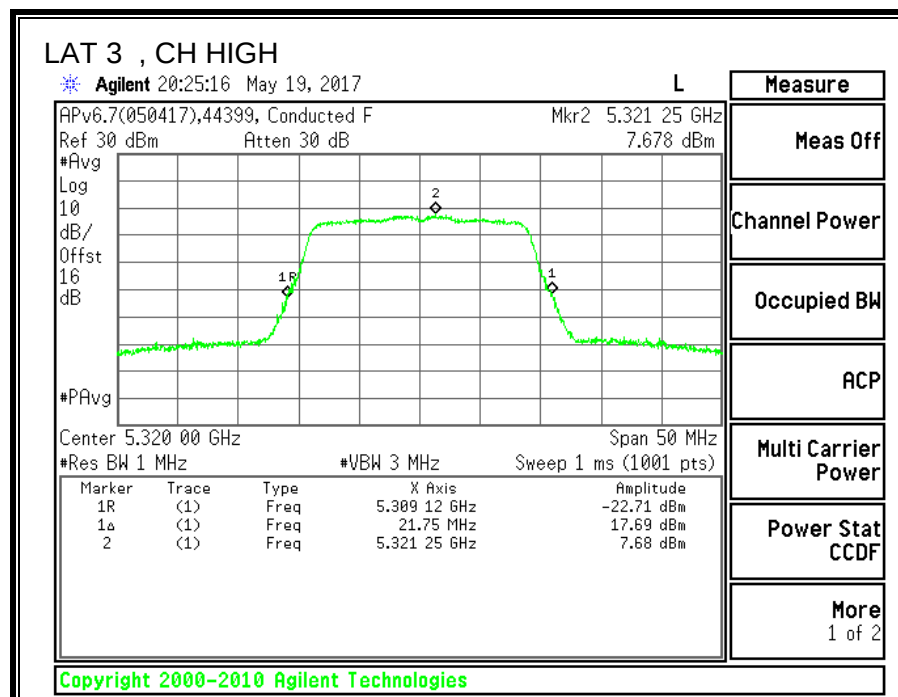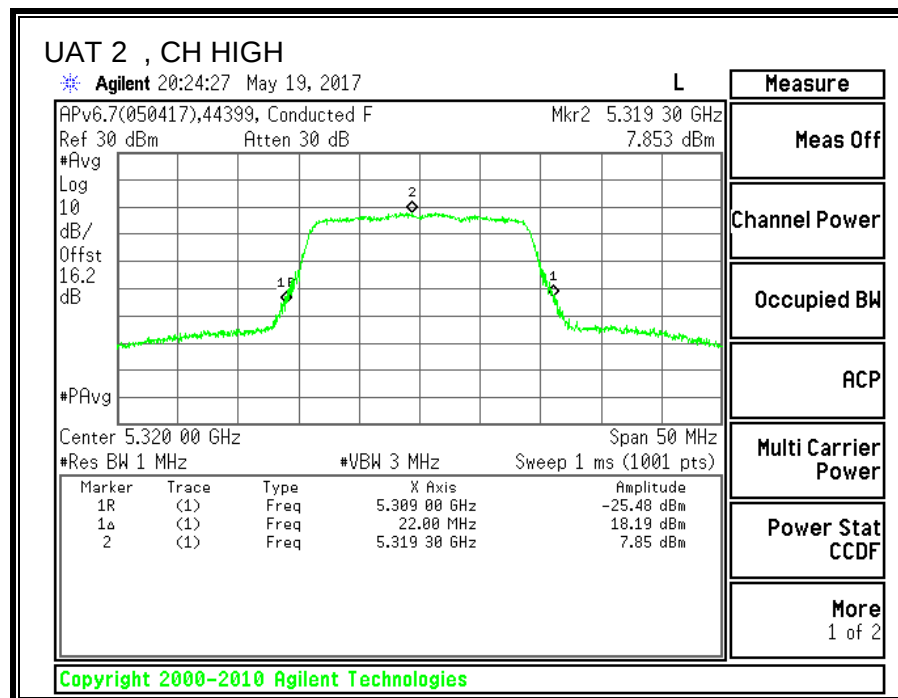

8.13. 11n HT40 UAT 2 SISO MODE IN THE 5.3GHz BAND



8.13.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5270	40.6
High	5310	40.5

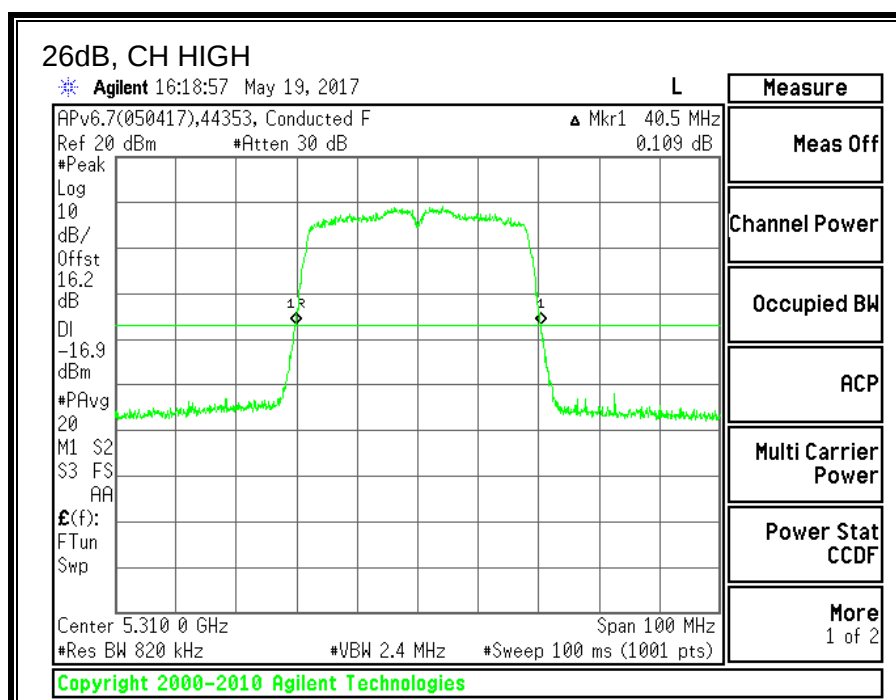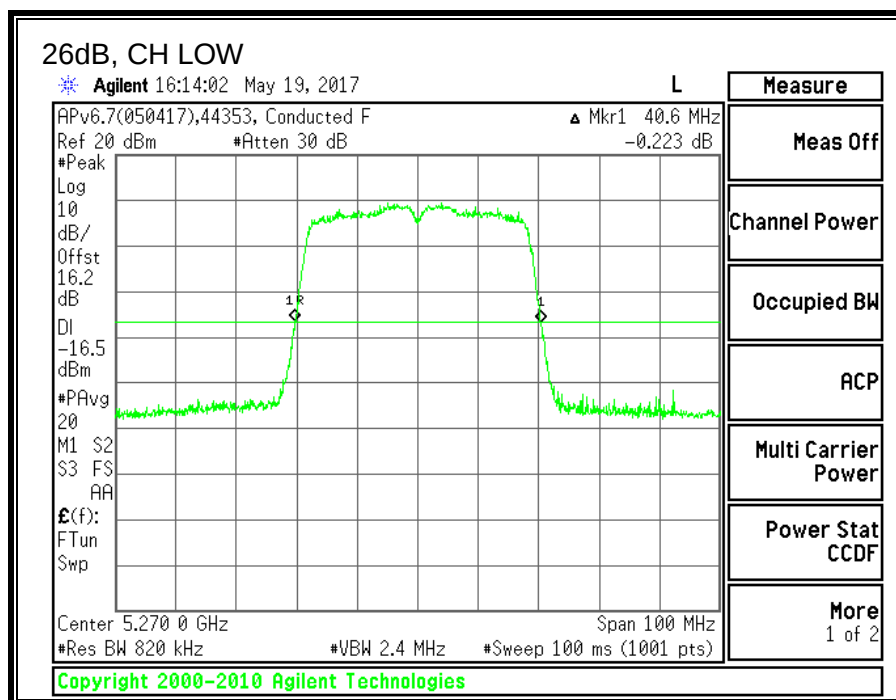



8.13.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Low	5270	36.1533
High	5310	36.1320

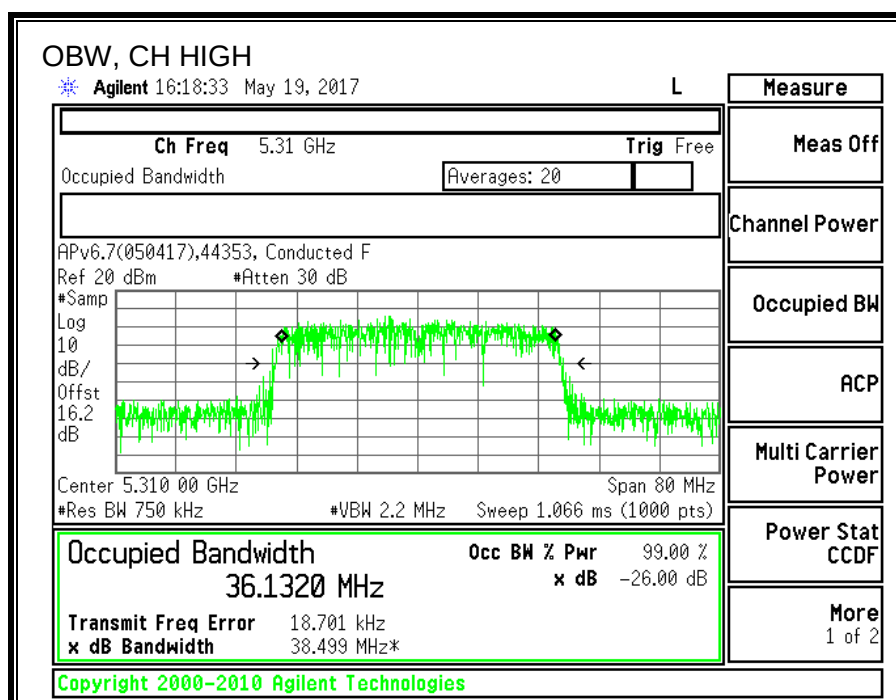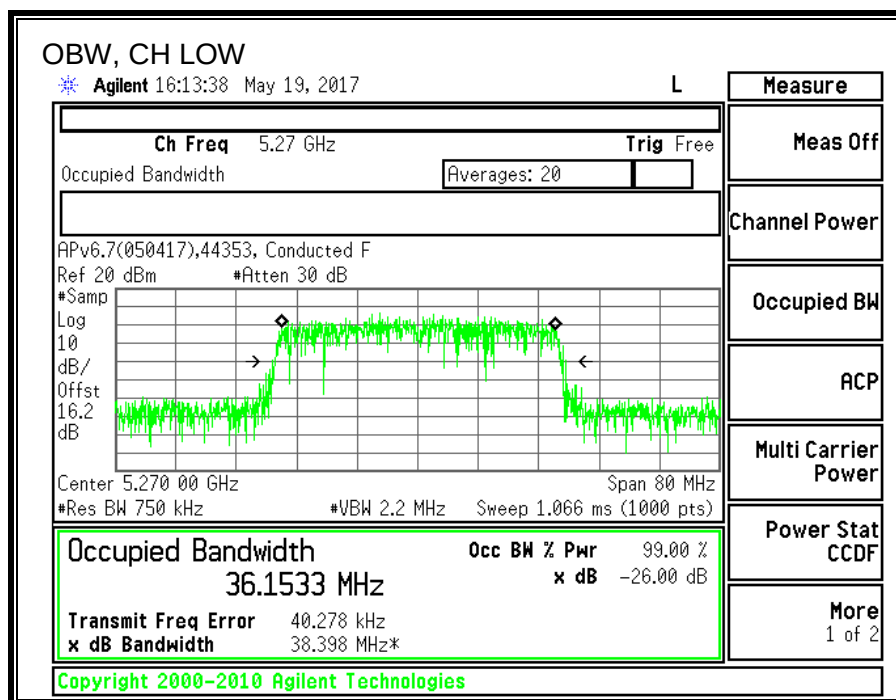

8.13.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Low	5270	19.45
High	5310	17.85

8.13.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	40.60	36.15	-3.27	24.00	11.00
High	5310	40.50	36.13	-3.27	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	19.45	19.45	24.00	-4.55
High	5310	17.85	17.85	24.00	-6.15

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	8.341	8.441	11.00	-2.56
High	5310	8.160	8.260	11.00	-2.74

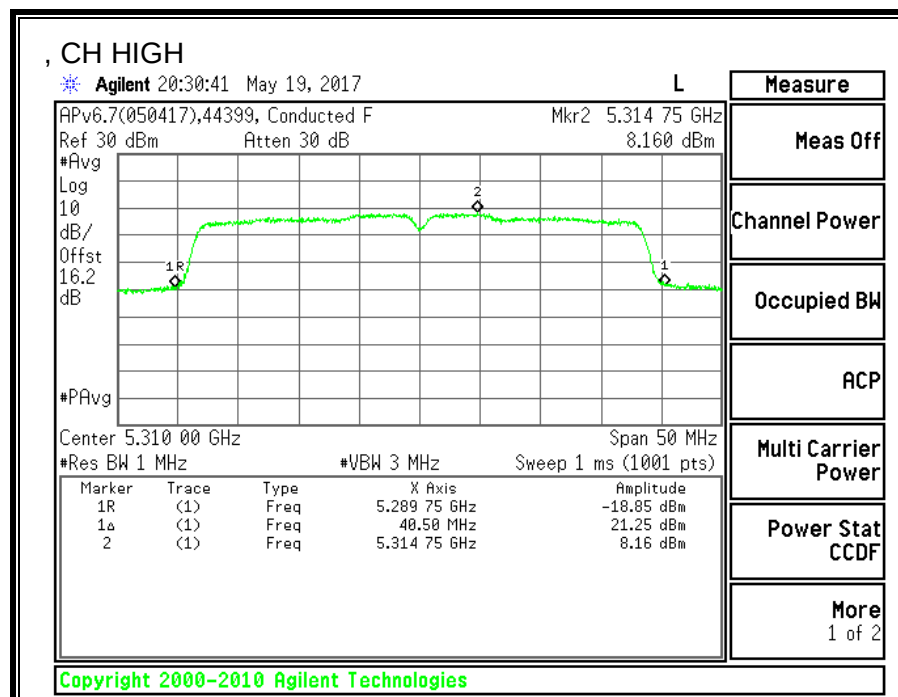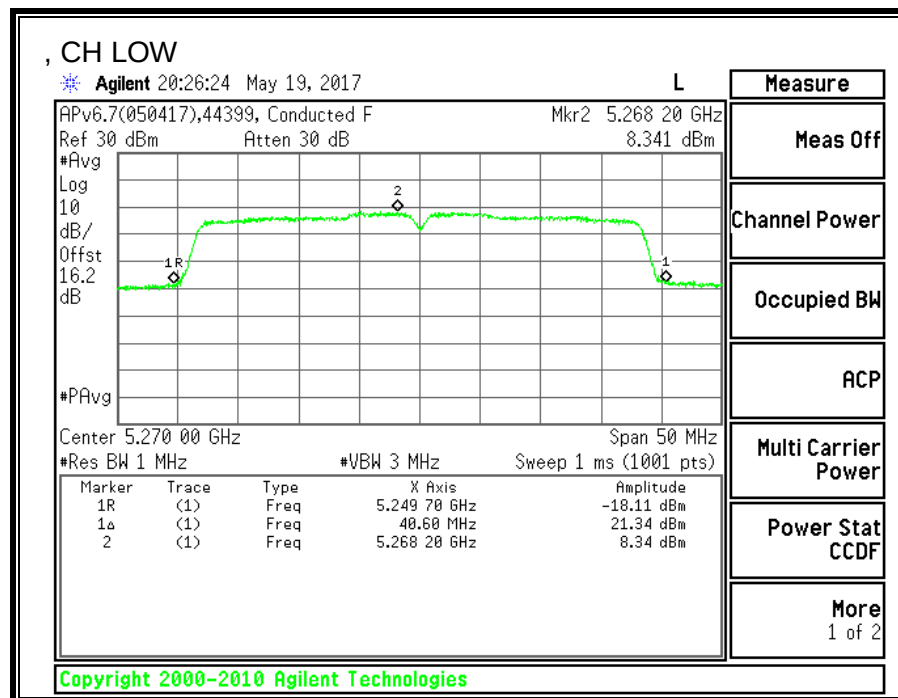

8.14. 11n HT40 LAT 3 SISO MODE IN THE 5.3GHz BAND



8.14.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5270	40.6
High	5310	40.6

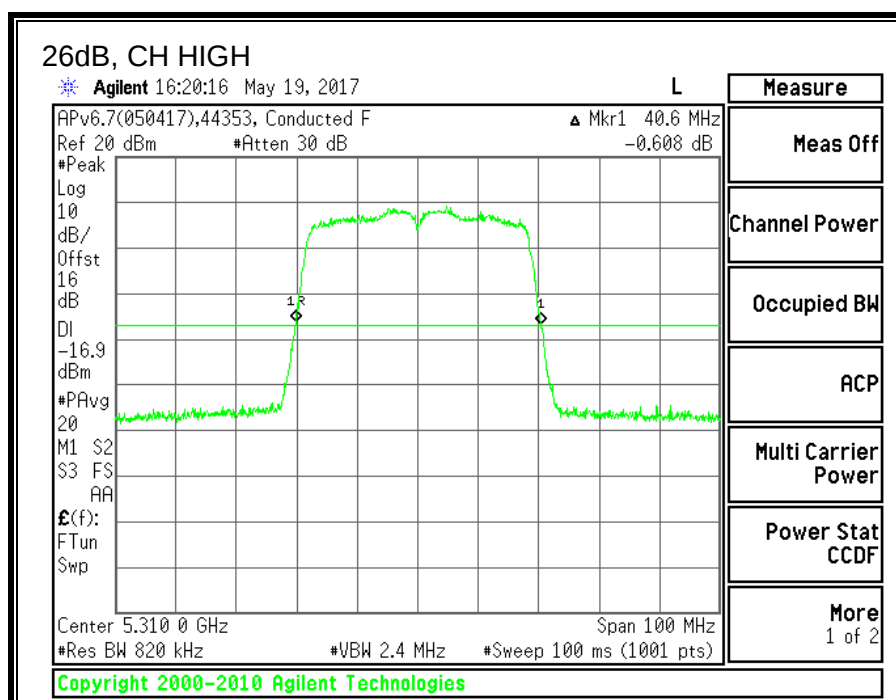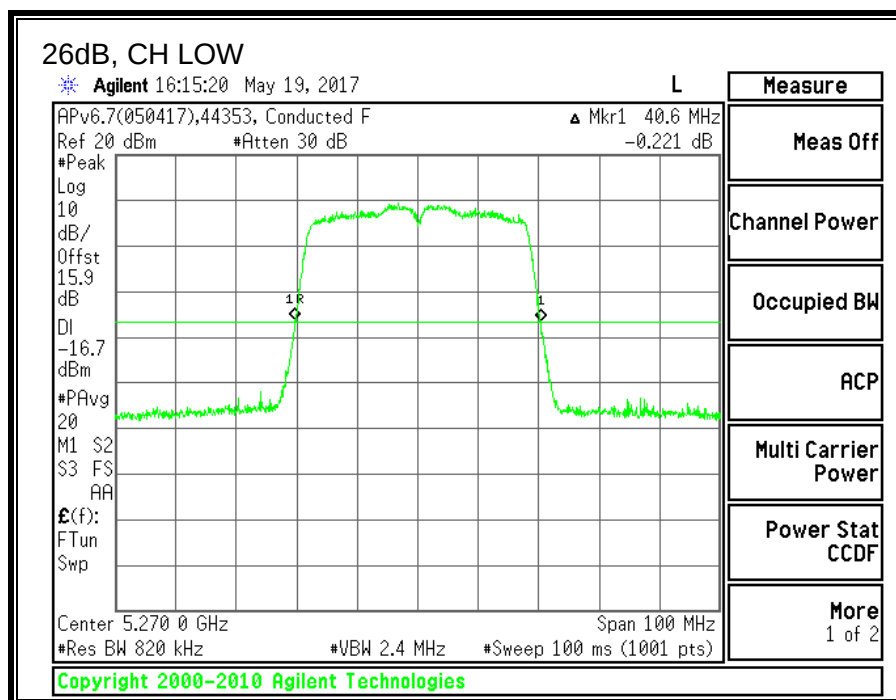



8.14.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Low	5270	36.1856
High	5310	36.1739

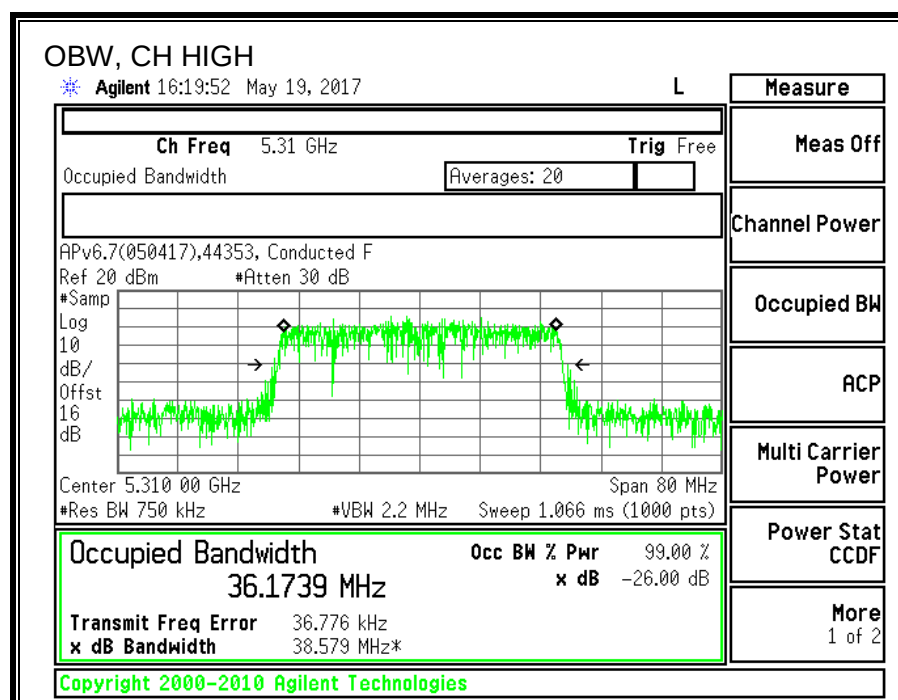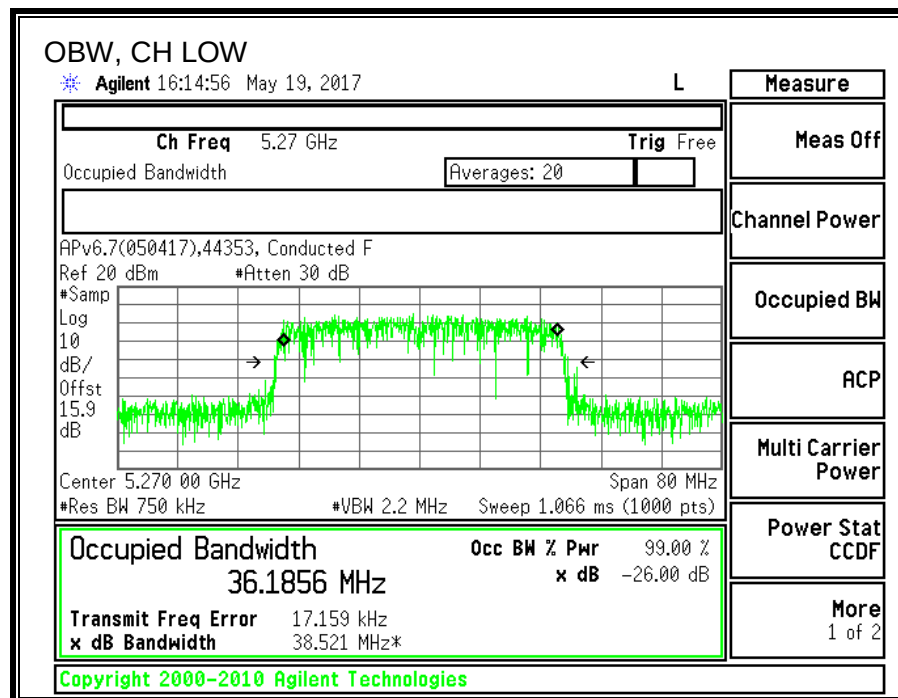

8.14.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Low	5270	19.42
High	5310	17.78

8.14.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	40.60	36.19	-6.98	24.00	11.00
High	5310	40.60	36.17	-6.98	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	19.42	19.42	24.00	-4.58
High	5310	17.78	17.78	24.00	-6.22

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	8.09	8.19	11.00	-2.81
High	5310	8.13	8.23	11.00	-2.77

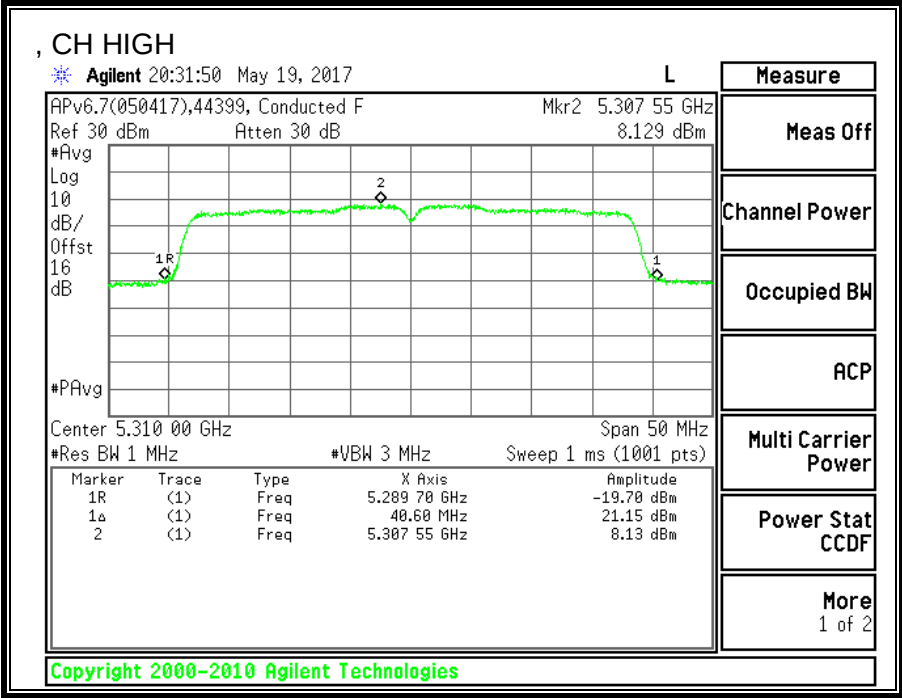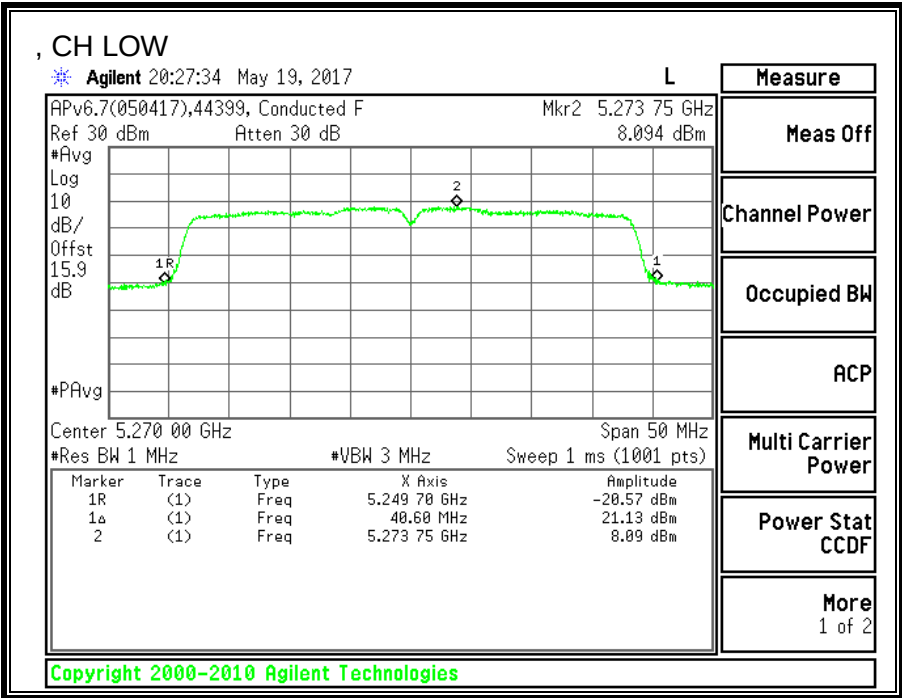

8.15. 11n HT40 2TX CDD MIMO MODE IN THE 5.3GHz BAND



8.15.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Low	5270	40.6	40.1
High	5310	40.7	40.2

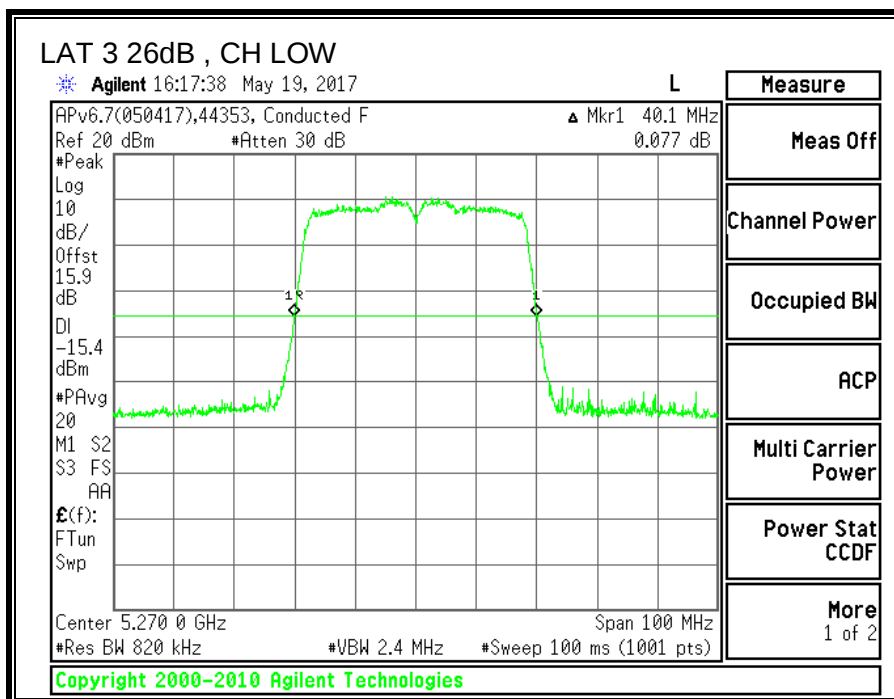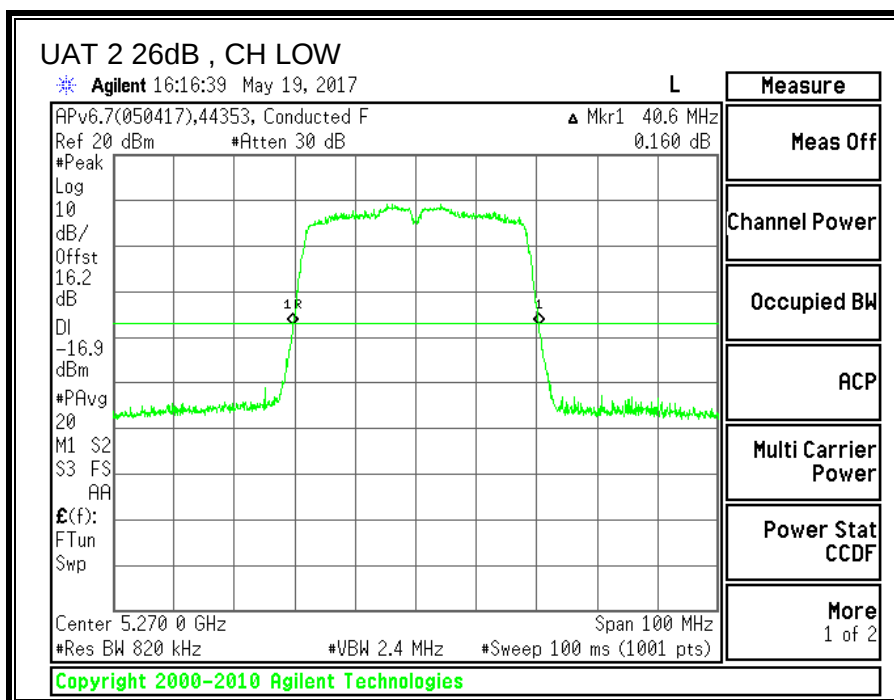

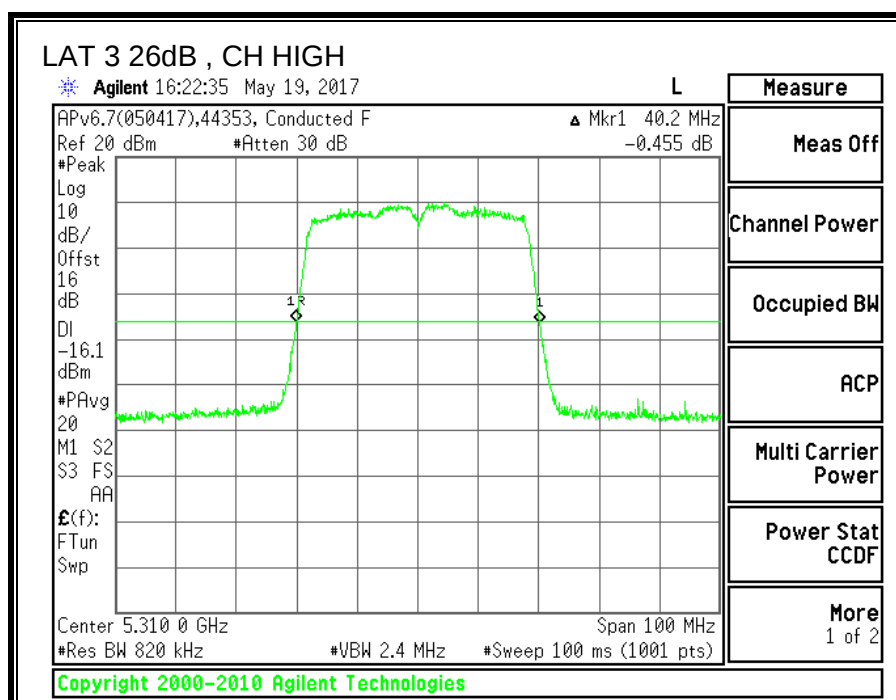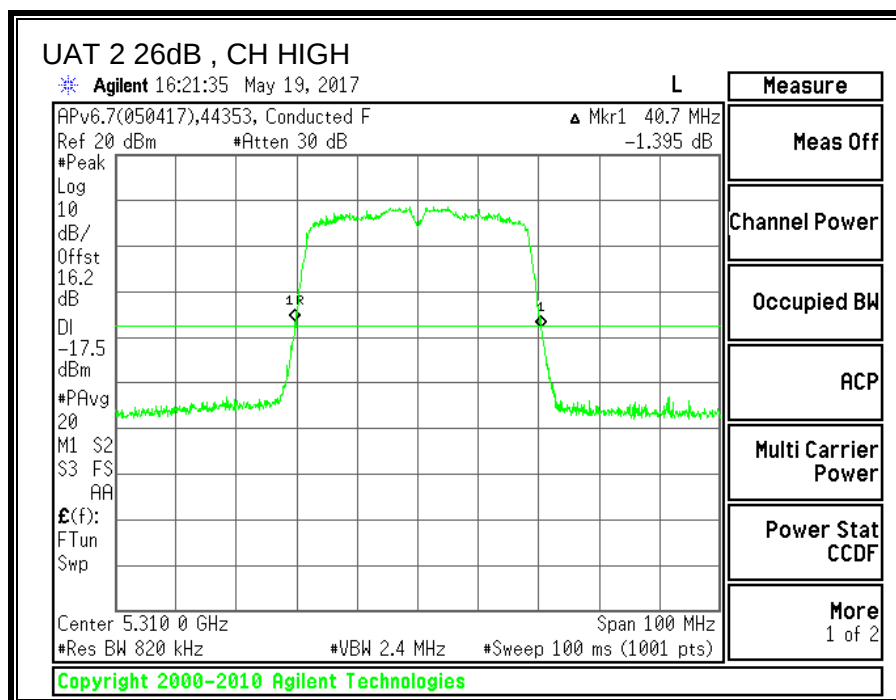



8.15.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Low	5270	36.1664	36.2013
High	5310	36.2009	36.1394

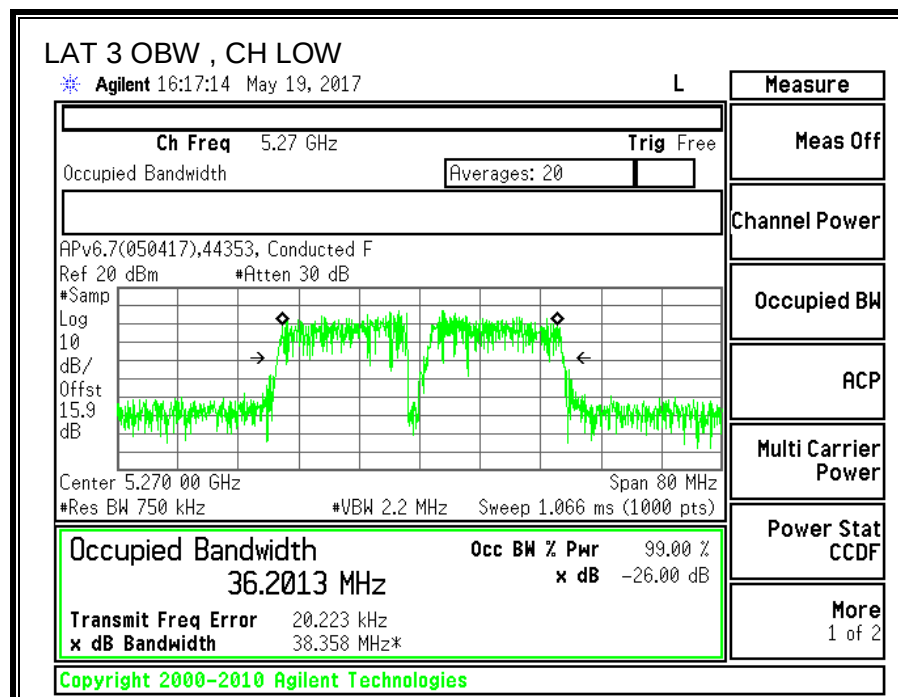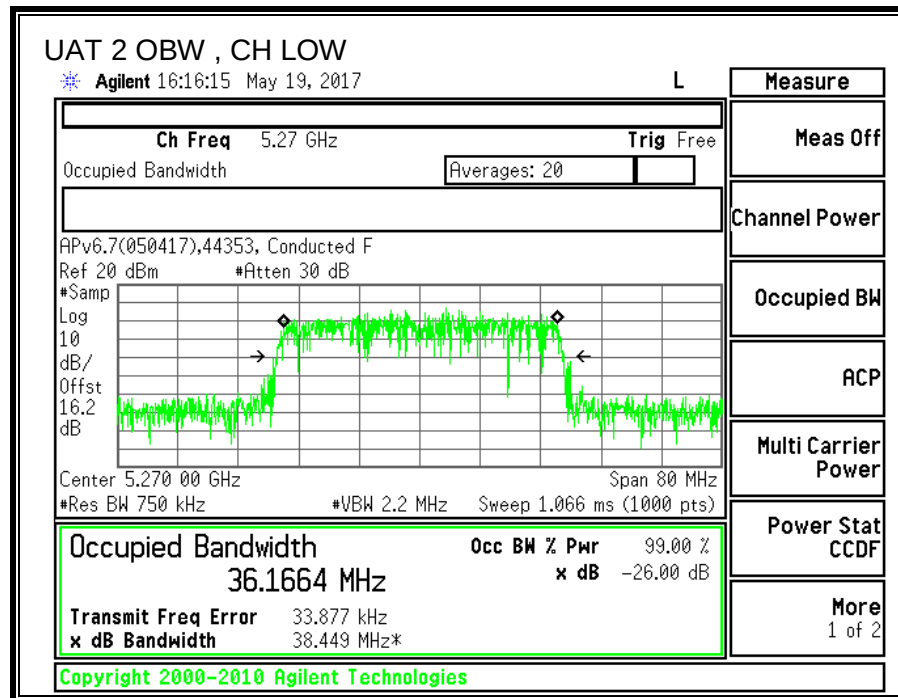

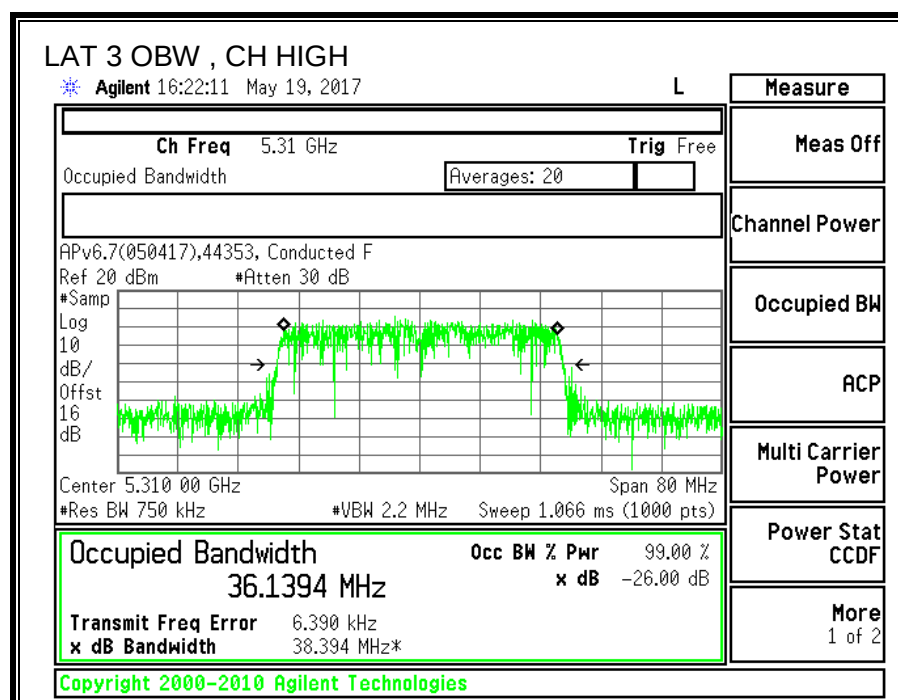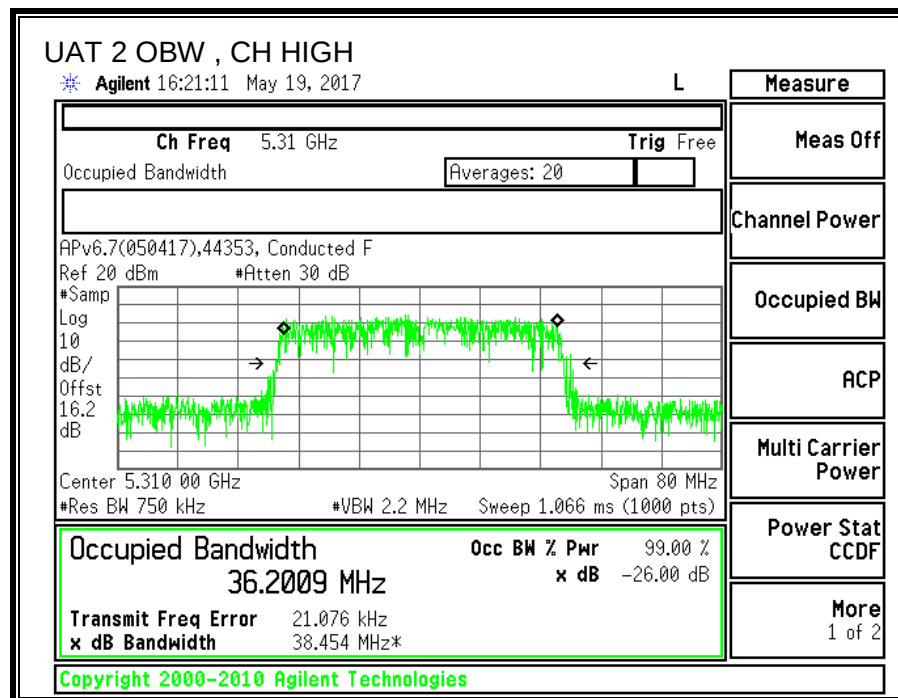

8.15.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Low	5270	19.42	19.41	22.43
High	5310	16.96	16.94	19.96

8.15.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-3.27	-6.98	-4.74

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-3.27	-6.98	-1.92

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	40.1	36.166	-4.74	-1.92	24.00	11.00
High	5310	40.2	36.201	-4.74	-1.92	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	19.42	19.41	22.43	24.00	-1.57
High	5310	16.96	16.94	19.96	24.00	-4.04

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm/1MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.53	6.37	9.56	11.00	-1.44
High	5310	6.59	6.26	9.53	11.00	-1.47

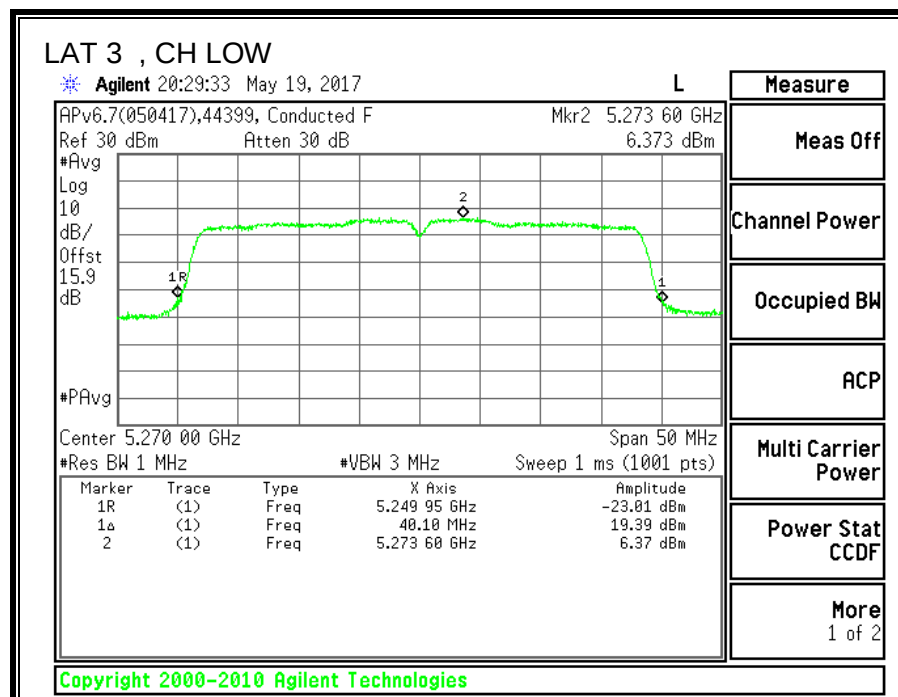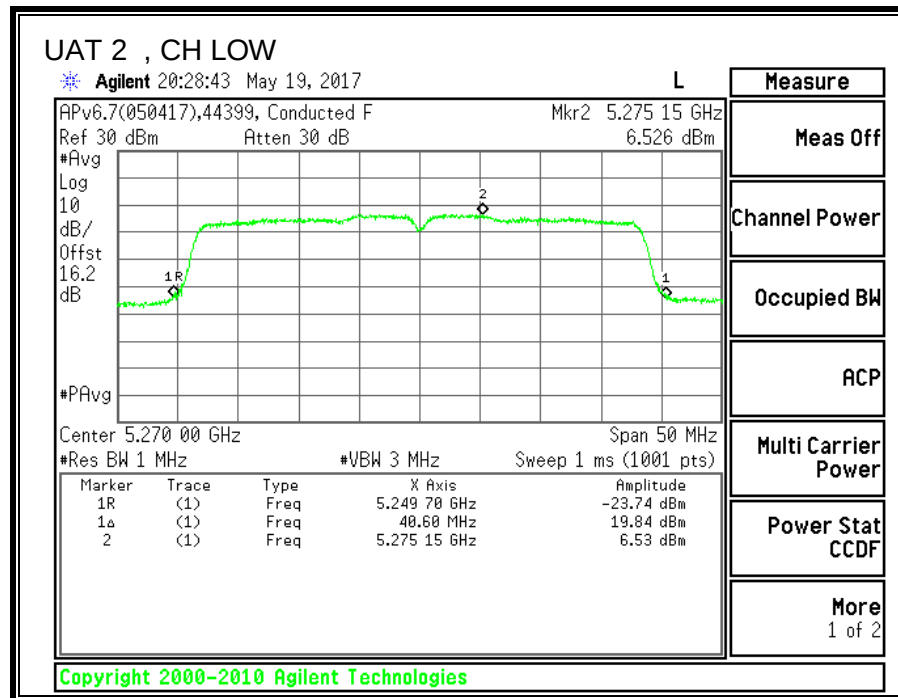

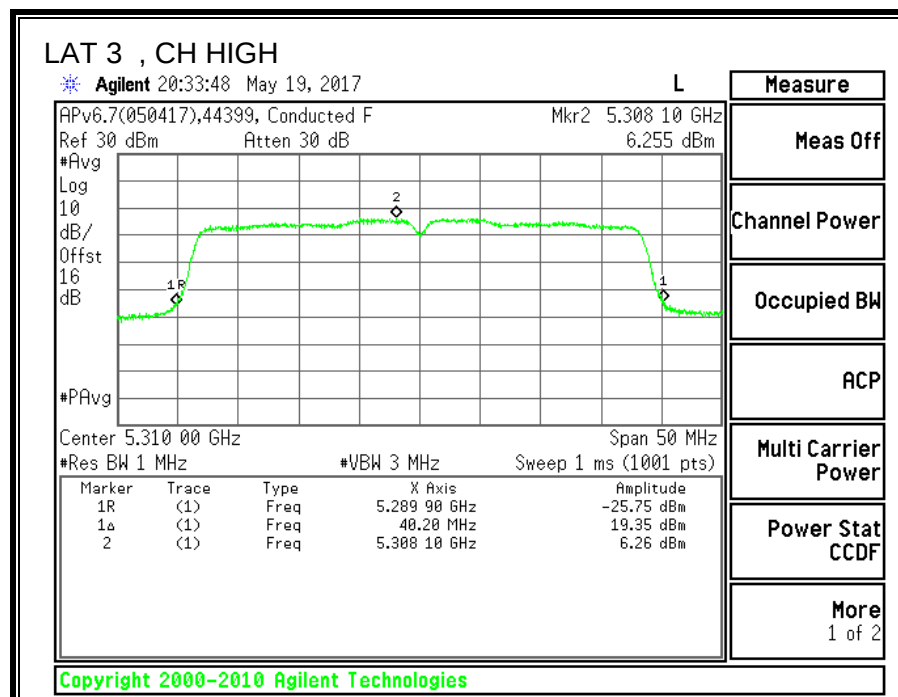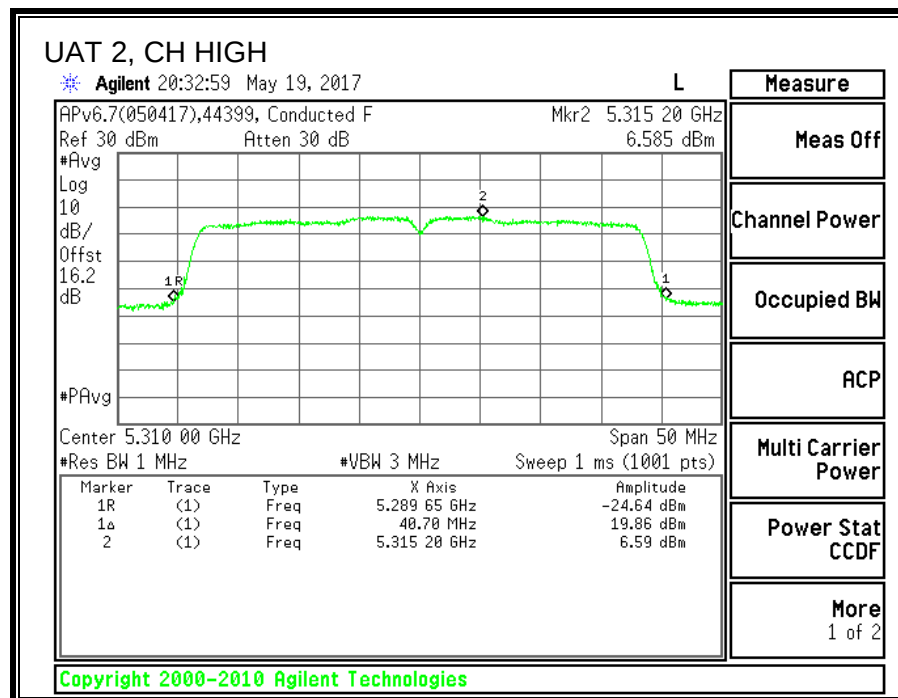

8.16. 11ac HT80 UAT 2 SISO MODE IN THE 5.3GHz BAND


8.16.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Mid	5290	82.4

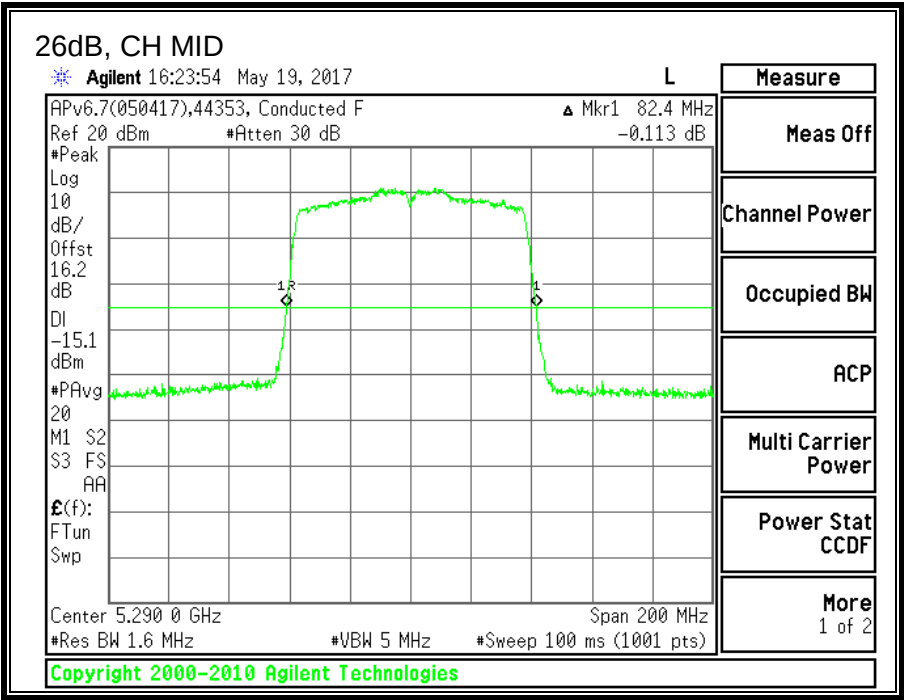


8.16.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Mid	5290	75.2716

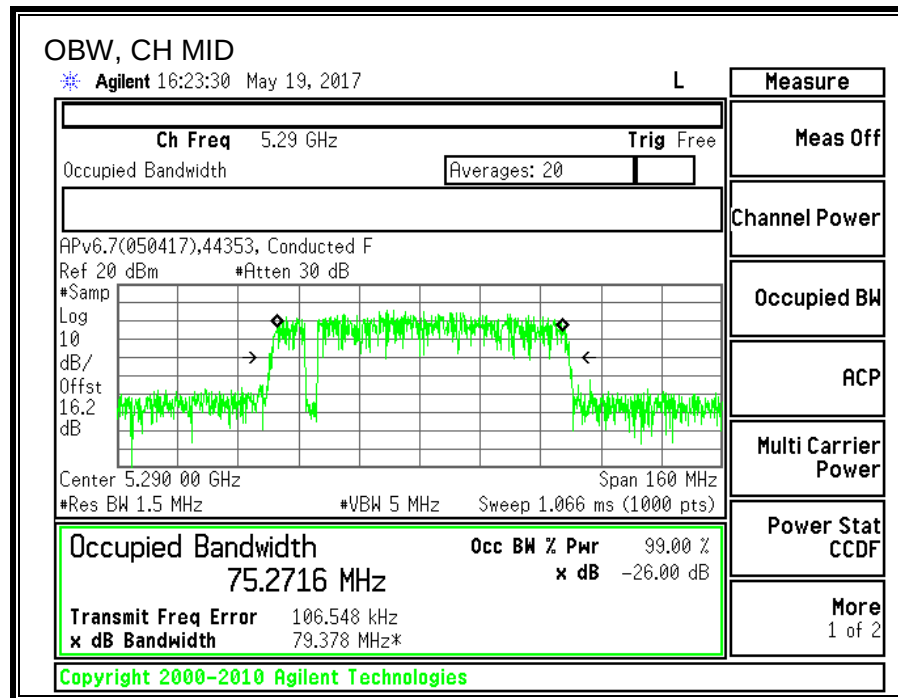

8.16.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Mid	5290	17.42

8.16.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	82.40	75.27	-3.27	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	17.42	17.42	24.00	-6.58

PPSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	5.60	5.79	11.00	-5.21

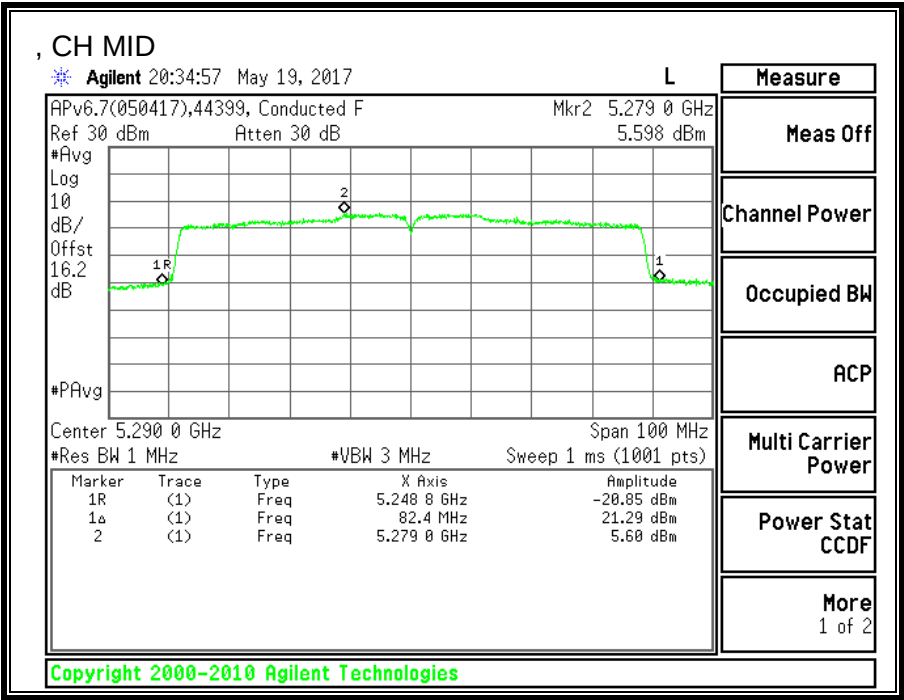

8.17. 11ac HT80 LAT 3 SISO MODE IN THE 5.3GHz BAND


8.17.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Mid	5290	82.4

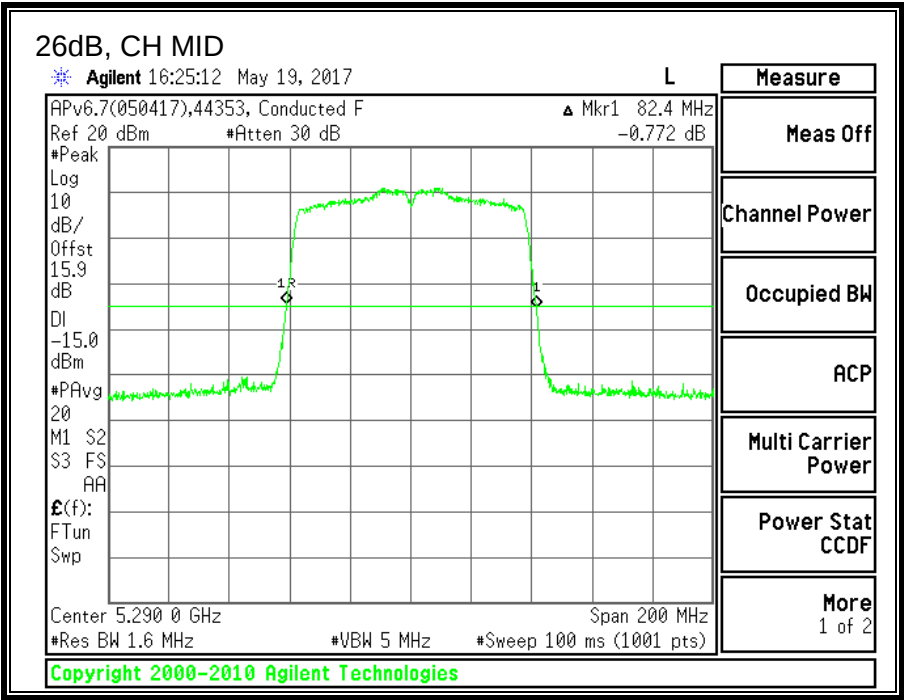


8.17.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Mid	5290	75.2509

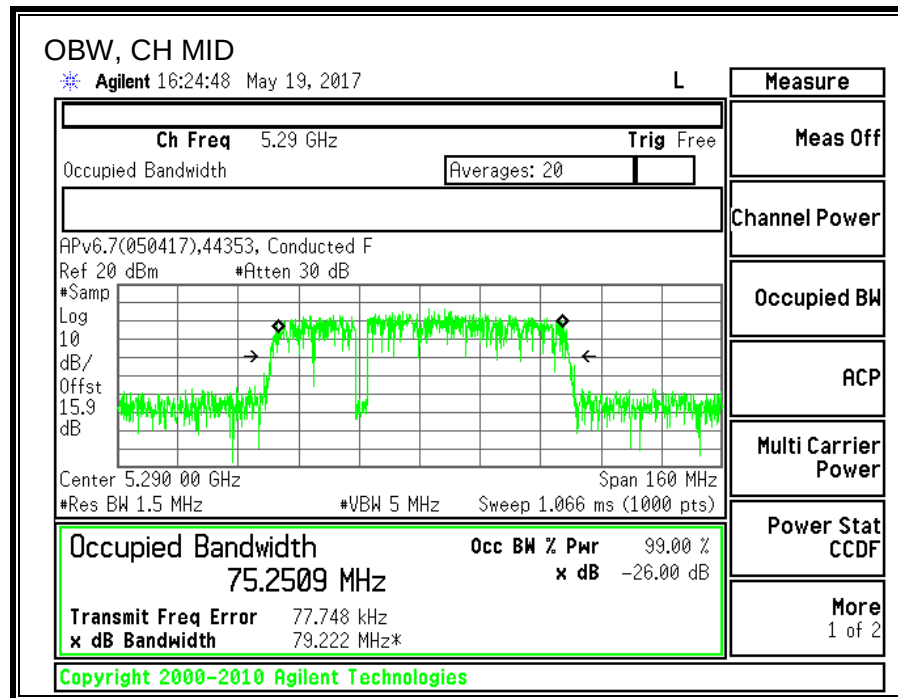

8.17.3. AVERAGE POWER

ID:	30554	Date:	7/28/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Mid	5290	17.42

8.17.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	82.40	75.25	-6.98	24.00	11.00

Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	17.42	17.42	24.00	-6.58

PPSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	5.59	5.78	11.00	-5.22