



FCC Part 15E Test Report

FCC ID: 2A6T2-X98KPRO

Applicant: SHENZHEN AMEDIA TECHNOLOGY CO., LTD

Address: 201, Building 2, Stech Park, Taoyuan Community, Dalang Street, LongHua District, ShenZhen

Manufacturer: SHENZHEN AMEDIA TECHNOLOGY CO., LTD

Address: 201, Building 2, Stech Park, Taoyuan Community, Dalang Street, LongHua District, ShenZhen

EUT: Smart TV box

Trade Mark: N/A

Model Number: X98K PRO

Date of Receipt: Apr. 27, 2025

Test Date: Apr. 27, 2025 - Jul. 04, 2025

Date of Report: Jul. 04, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 E 15.407
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250427037R

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3 . EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	16
3.2.5 EUT OPERATING CONDITIONS	17
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	18
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	19
3.2.8 TEST RESULTS (1GHZ~40GHZ)	21
3.3 RADIATED BAND EMISSION MEASUREMENT	45
3.3.1 TEST REQUIREMENT:	45
3.3.2 TEST PROCEDURE	45
3.3.3 DEVIATION FROM TEST STANDARD	45
3.3.4 TEST SETUP	45
3.3.5 EUT OPERATING CONDITIONS	45
4 . PEAK OUTPUT POWER	50
4.1 APPLIED PROCEDURES / LIMIT	50
4.1.1 TEST PROCEDURE	50
4.1.2 DEVIATION FROM STANDARD	50
4.1.3 TEST SETUP	50
4.1.4 EUT OPERATION CONDITIONS	50
4.1.5 TEST RESULTS	51
5 . POWER SPECTRAL DENSITY TEST	58
5.1 APPLIED PROCEDURES / LIMIT	58
5.1.1 TEST PROCEDURE	58
5.1.2 DEVIATION FROM STANDARD	58
5.1.3 TEST SETUP	58
5.1.4 EUT OPERATION CONDITIONS	58
5.1.5 TEST RESULTS	59
6 . 6DB&26DB&99% BANDWIDTH TEST	66



Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	66
6.1.1 TEST PROCEDURE	66
6.1.2 DEVIATION FROM STANDARD	66
6.1.3 TEST SETUP	66
6.1.4 EUT OPERATION CONDITIONS	67
6.1.5 TEST RESULTS	67
7 . DUTY CYCLE TEST SIGNAL	74
7.1 APPLIED PROCEDURES / LIMIT	74
7.1.1 TEST PROCEDURE	74
7.1.2 DEVIATION FROM STANDARD	74
7.1.3 TEST SETUP	74
7.1.4 EUT OPERATION CONDITIONS	74
7.1.5 TEST RESULTS	75
8 . FREQUENCY STABILITY	82
8.1 APPLIED PROCEDURES / LIMIT	82
8.1.1 TEST PROCEDURE	82
8.1.2 DEVIATION FROM STANDARD	82
8.1.3 TEST SETUP	82
8.1.4 EUT OPERATION CONDITIONS	82
8.1.5 TEST RESULTS	83
9 . TRANSMISSION IN THE ABSENCE OF DATA	86
9.1 STANDARD REQUIREMENT	86
9.2 TEST RESULT	86
10 . ANTENNA REQUIREMENT	86
10.1 STANDARD REQUIREMENT	86
10.2 EUT ANTENNA	86
11 . TEST SEUUP PHOTO	86
12 . EUT PHOTO	86



1.. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.407(b), 15.209	Radiated Spurious Emission	PASS	
15.407 (b)	Band Edge Emission	PASS	
15.407 (a)	Peak Output Power	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(a) (e)	26dB bandwidth and 99%dB Bandwidth 6dB bandwidth and 99%dB Bandwidth	PASS	
15.407(g)	Frequency Stability	PASS	
15.407(c)	Transmission in case of Absence of Information	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1

Address: Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

1.1. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<30MHz)	$\pm 3.54\text{dB}$
5	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
6	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
7	Occupied bandwidth	$\pm 1.28\text{MHz}$
8	PSD	$\pm 0.69\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$



2.. GENERAL INFORMATION

2.1. GENERAL DESCRIPTION OF EUT

Product Name:	Smart TV box
Trademark	N/A
Model No.:	X98K PRO
Model Difference	N/A
Operation Frequency:	5180-5240, 5745-5825MHz(802.11a/n/ac(HT20)) 5190-5230, 5755-5795MHz(802.11n/ac(HT40)) 5210MHz , 5775MHz (802.11ac(HT80))
Channel numbers:	See channel list
Channel separation:	20MHz/40MHz/80MHz
Modulation technology:	64QAM, 16QAM, QPSK, BPSK for OFDM
Rate of Transmitter	802.11a: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps 802.11n: Up to 300Mbps 802.11ac: up to 867Mbps
Antenna Type:	External Antenna
Antenna gain:	1.43dBi
Power Supply:	DC 5V from adapter
Adapter:	MODEL: GJ15WD-0500200UW INPUT: 100-240V~50/60Hz 0.5A OUTPUT: 5.0V-2.0A 10.0W

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



2. Channel List

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230

Channel List for 802.11ac(HT80)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	/	/

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

Channel List for 802.11ac(HT80)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	/	/



2.2. DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was e-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Band 1:

Pretest Mode	Modulation	Channel
Mode 1	802.11a	CH36
Mode 2		CH44
Mode 3		CH48
Mode 4	802.11n HT20	CH36
Mode 5		CH44
Mode 6		CH48
Mode 7	802.11ac HT20	CH36
Mode 8		CH44
Mode 9		CH48
Mode 10	802.11n HT40	CH38
Mode 11		CH46
Mode 12	802.11ac HT40	CH38
Mode 13		CH46
Mode 14	802.11ac HT80	CH42

Band 4:

Pretest Mode	Modulation	Channel
Mode 15	802.11a	CH149
Mode 16		CH157
Mode 17		CH165
Mode 18	802.11n HT20	CH149
Mode 19		CH157
Mode 20		CH165
Mode 21	802.11ac HT20	CH149
Mode 22		CH157
Mode 23		CH165
Mode 24	802.11n HT40	CH151
Mode 25		CH159
Mode 26	802.11ac HT40	CH151
Mode 27		CH159
Mode 28	802.11ac HT80	CH155

Note: (1) The measurements are performed at the highest, middle, lowest available channels.


(2) During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

(3) For the two items of conducted disturbance at the power supply end and space radiation below 1GHz, all modes have undergone pre-tests. The report only shows the worst test results of mode 3.




2.3. BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Power Line Conducted Emission Test



2.4. DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Smart TV box	X98K PRO	N/A	EUT
E-2	Adapter	GJ15WD-0500200UW	N/A	Manufacturer: Shenzhen Guljin Technology Co., Ltd.

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5. TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: RF TEST Setup			
Mode	802.11a	802.11n HT20	802.11n HT40	802.11ac HT20/HT40/HT80
Data Rate	6Mbps	MSC0	MSC0	MSC0
Power Setting of Softwave	60	60	66	66

**2.6. EQUIPMENTS LIST FOR ALL TEST ITEMS**

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3.. EMC EMISSION TEST

3.1. CONDUCTED EMISSION MEASUREMENT

3.1.1. POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.5 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2. TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3. DEVIATION FROM TEST STANDARD

No deviation

3.1.4. TEST SETUP

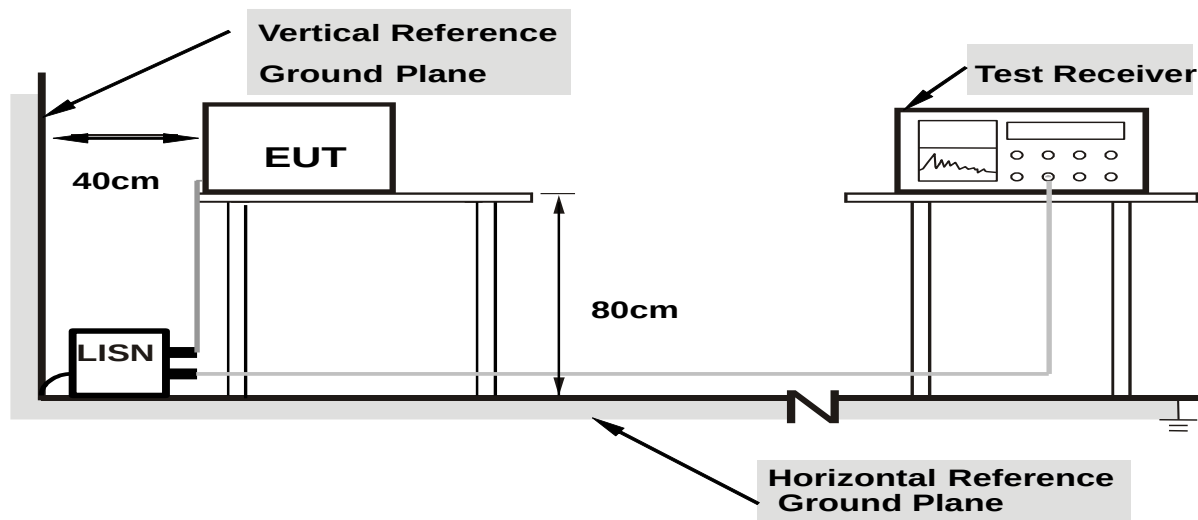

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5. EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6. TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3

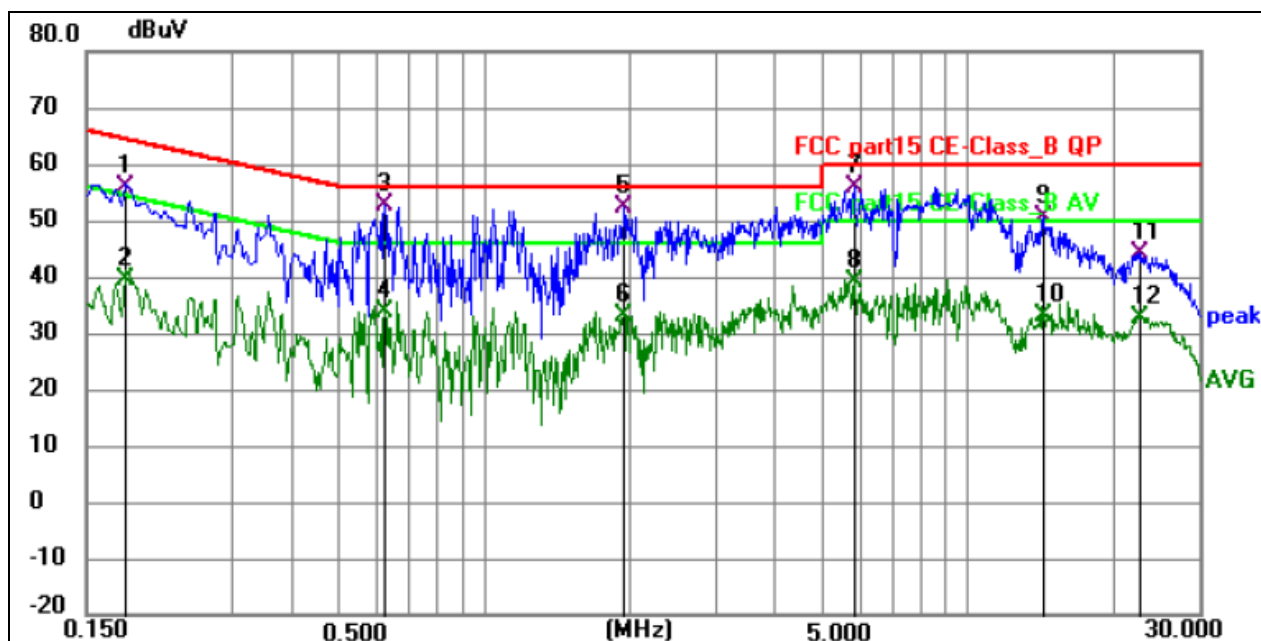


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1815	45.67	10.05	55.72	64.42	-8.70	QP	P	
2	0.1815	29.42	10.05	39.47	54.42	-14.95	AVG	P	
3 *	0.6225	42.57	10.13	52.70	56.00	-3.30	QP	P	
4	0.6225	23.65	10.13	33.78	46.00	-12.22	AVG	P	
5	1.9455	42.09	10.07	52.16	56.00	-3.84	QP	P	
6	1.9455	22.99	10.07	33.06	46.00	-12.94	AVG	P	
7	5.8155	45.23	10.55	55.78	60.00	-4.22	QP	P	
8	5.8155	28.58	10.55	39.13	50.00	-10.87	AVG	P	
9	14.3925	38.87	11.62	50.49	60.00	-9.51	QP	P	
10	14.3925	21.28	11.62	32.90	50.00	-17.10	AVG	P	
11	22.7265	31.69	12.41	44.10	60.00	-15.90	QP	P	
12	22.7265	20.27	12.41	32.68	50.00	-17.32	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3

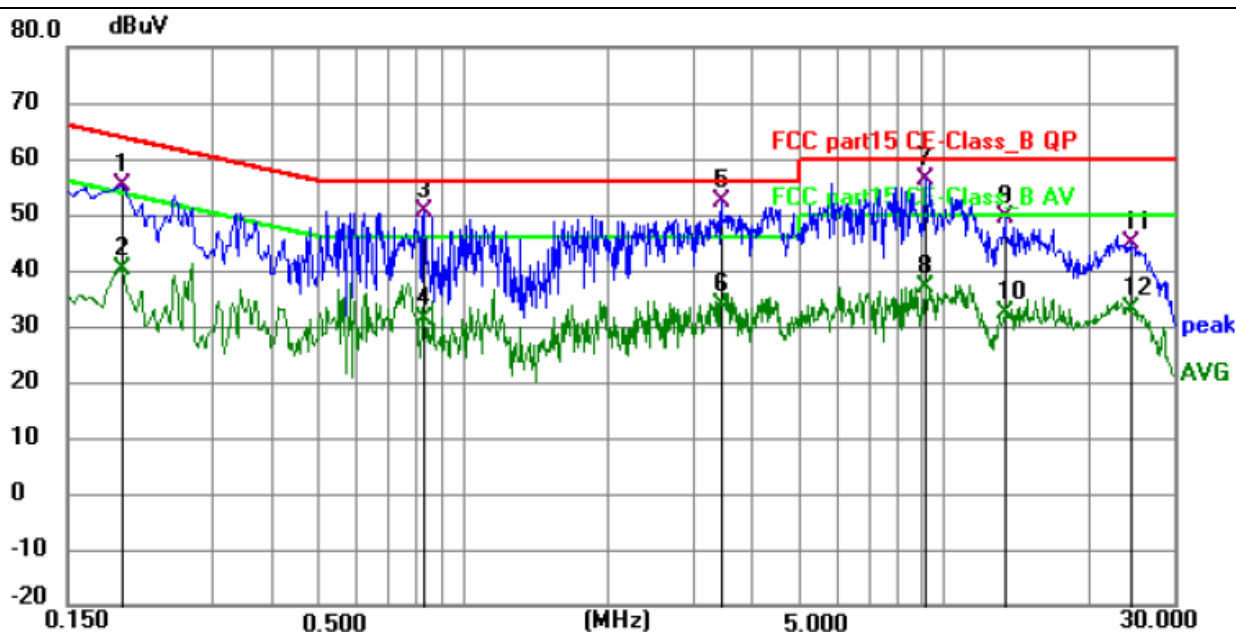

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	45.14	10.16	55.30	63.83	-8.53	QP	P	
2	0.1949	29.87	10.16	40.03	53.83	-13.80	AVG	P	
3	0.8340	40.61	10.06	50.67	56.00	-5.33	QP	P	
4	0.8340	21.29	10.06	31.35	46.00	-14.65	AVG	P	
5 *	3.4395	42.34	10.10	52.44	56.00	-3.56	QP	P	
6	3.4395	23.81	10.10	33.91	46.00	-12.09	AVG	P	
7	9.1545	45.15	11.08	56.23	60.00	-3.77	QP	P	
8	9.1545	25.91	11.08	36.99	50.00	-13.01	AVG	P	
9	13.4070	37.86	11.45	49.31	60.00	-10.69	QP	P	
10	13.4070	20.84	11.45	32.29	50.00	-17.71	AVG	P	
11	24.5715	32.33	12.50	44.83	60.00	-15.17	QP	P	
12	24.5715	20.36	12.50	32.86	50.00	-17.14	AVG	P	



3.2. RADIATED EMISSION MEASUREMENT

3.2.1. RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

15.407(b) Undesirable emission limits. Except as shown in paragraph (b) (10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2. TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:

The horizontal and vertical polarities of the antenna were tested, and a pre-test was conducted on the EUT placement as three orthogonal axes X,Y,Z. The worst display of the test results was the Y-axis. The worst case emissions were reported.


3.2.3. DEVIATION FROM TEST STANDARD

No deviation




3.2.4. TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

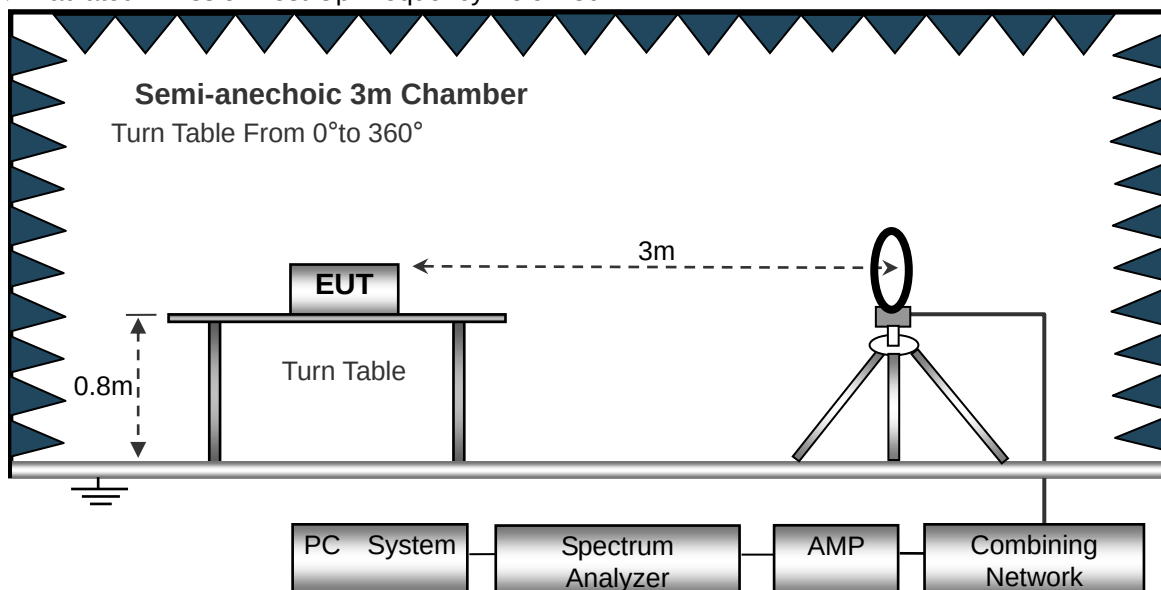

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

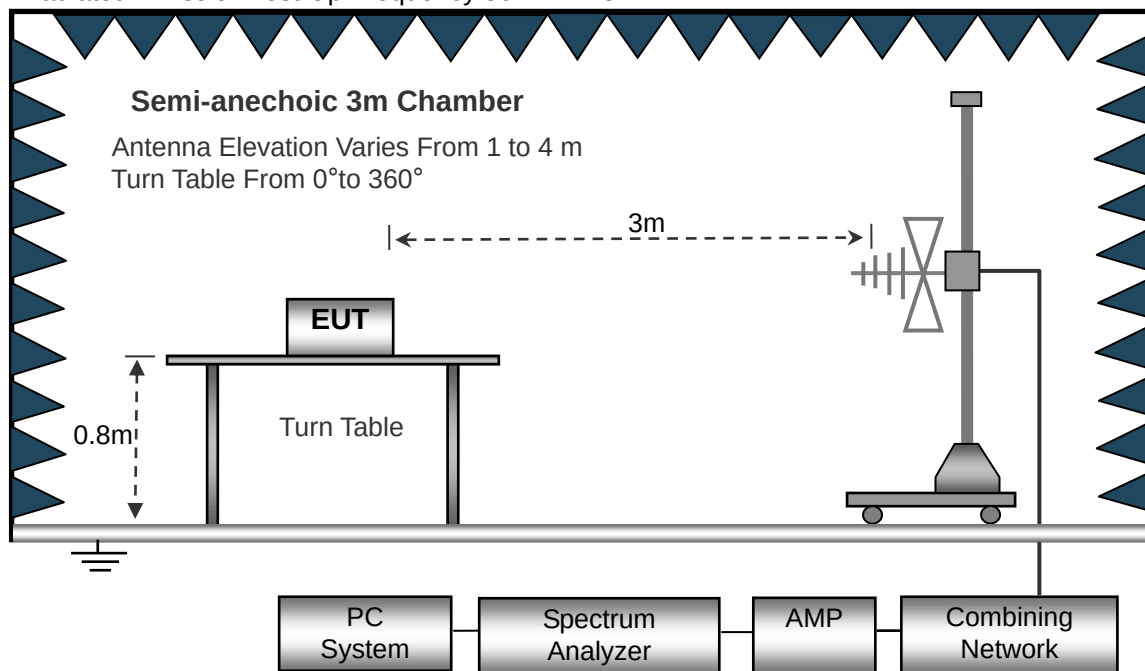

(C) Radiated Emission Test-Up Frequency Above 1GHz

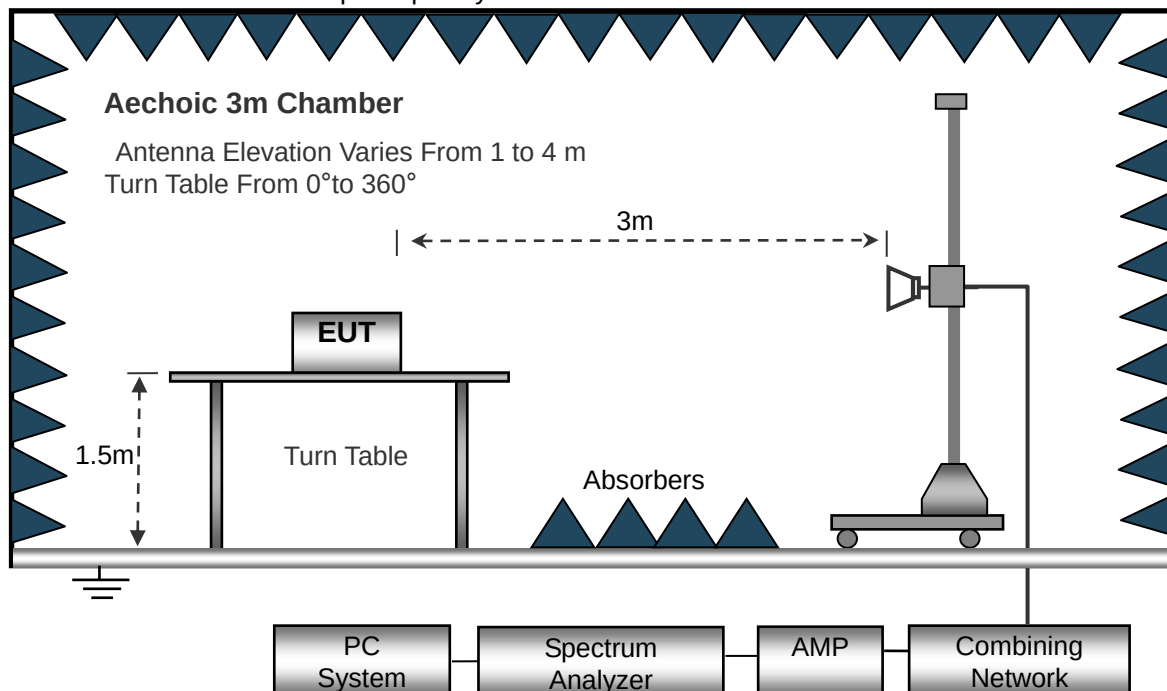

3.2.5. EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6. TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 3	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7. TEST RESULTS (Between 30MHz – 1GHz)**

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 3		

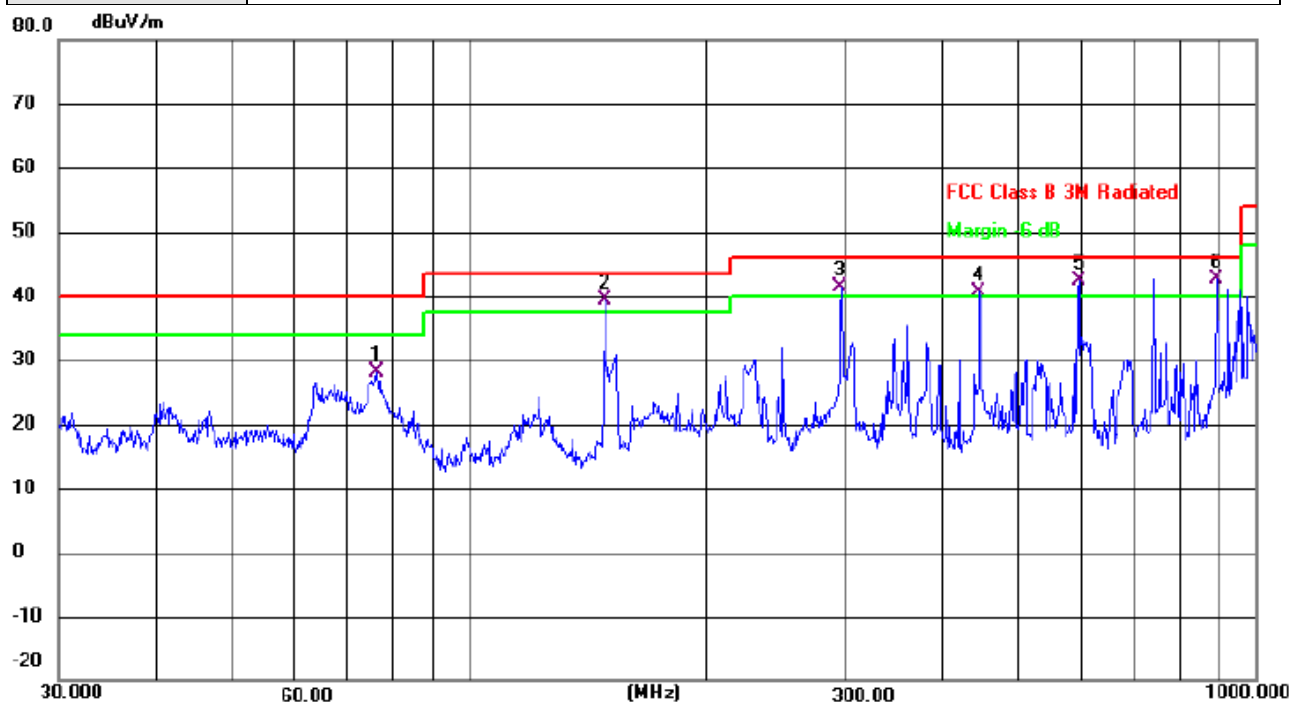

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		76.2442	46.91	-18.87	28.04	40.00	-11.96	QP
2	!	148.4410	57.73	-18.46	39.27	43.50	-4.23	QP
3	!	297.2238	53.32	-11.87	41.45	46.00	-4.55	QP
4	!	444.8514	49.20	-8.58	40.62	46.00	-5.38	QP
5	!	595.1326	47.72	-5.44	42.28	46.00	-3.72	QP
6	*	890.7277	43.54	-0.91	42.63	46.00	-3.37	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
test voltage :	AC 120V/60Hz		
Test Mode :	Mode 3		

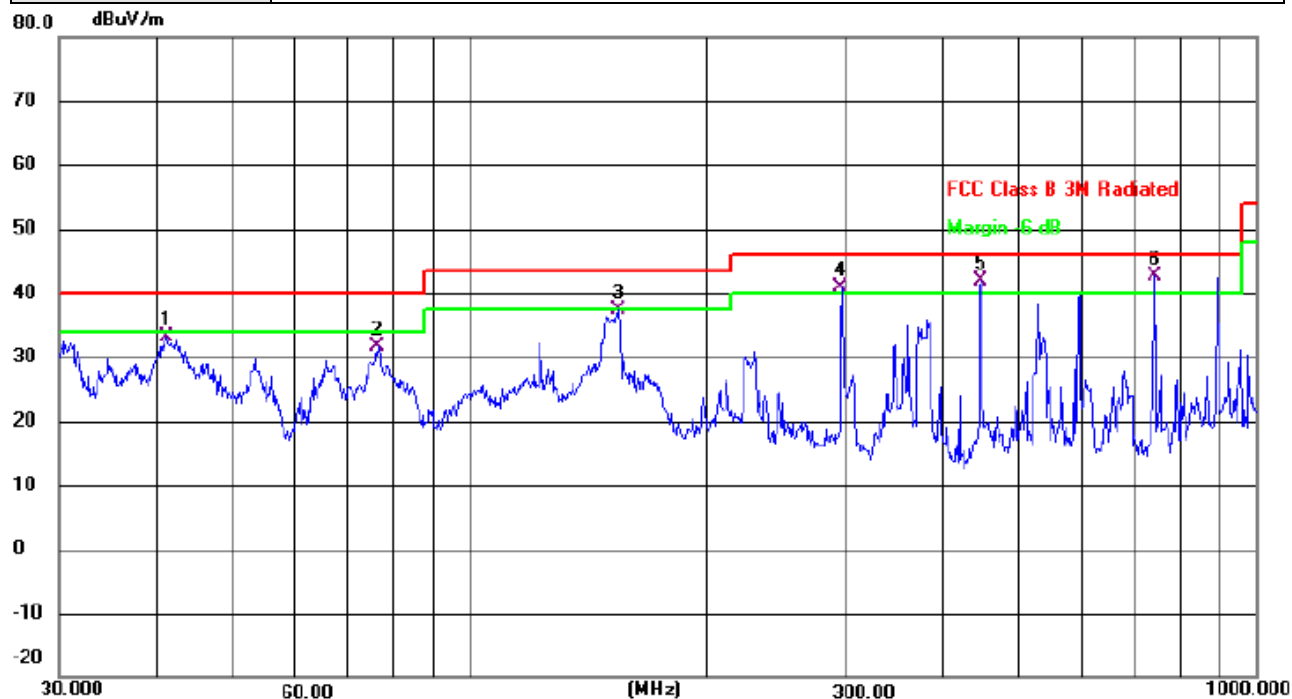

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		41.1319	46.73	-13.64	33.09	40.00	-6.91	QP
2		76.5119	50.63	-18.91	31.72	40.00	-8.28	QP
3		154.2785	55.56	-18.25	37.31	43.50	-6.19	QP
4	!	297.2238	52.84	-11.87	40.97	46.00	-5.03	QP
5	!	446.4139	50.30	-8.46	41.84	46.00	-4.16	QP
6	*	742.2586	45.92	-3.17	42.75	46.00	-3.25	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8. TEST RESULTS (1ghz~40ghZ)**

802.11a band 1

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5180									
V	10360	56.63	49.05	15.3	37.39	60.27	68.2	-7.93	PK
V	10360	41.88	49.05	15.3	37.39	45.52	54	-8.48	AV
V	15540	52.14	49.16	15.27	40.45	58.7	74	-15.30	PK
V	15540	39.63	49.16	15.27	40.45	46.19	54	-7.81	AV
H	10360	56.21	49.05	15.3	37.39	59.85	68.2	-8.35	PK
H	10360	40.98	49.05	15.3	37.39	44.62	54	-9.38	AV
H	15540	51.46	49.16	15.27	40.45	58.02	74	-15.98	PK
H	15540	38.21	49.16	15.27	40.45	44.77	54	-9.23	AV
operation frequency:5200									
V	10400	57.69	49.09	15.34	37.42	61.36	68.2	-6.84	PK
V	10400	39.84	49.09	15.34	37.42	43.51	54	-10.49	AV
V	15600	52.68	49.18	15.29	40.47	59.26	74	-14.74	PK
V	15600	38.26	49.18	15.29	40.47	44.84	54	-9.16	AV
H	10400	56.36	49.09	15.34	37.42	60.03	68.2	-8.17	PK
H	10400	39.81	49.09	15.34	37.42	43.48	54	-10.52	AV
H	15600	53.87	49.18	15.29	40.47	60.45	74	-13.55	PK
H	15600	38.52	49.18	15.29	40.47	45.1	54	-8.90	AV
operation frequency:5240									
V	10480	58.21	49.11	15.37	37.46	61.93	68.2	-6.27	PK
V	10480	39.69	49.11	15.37	37.46	43.41	54	-10.59	AV
V	15720	53.52	49.21	15.34	40.51	60.16	74	-13.84	PK
V	15720	38.31	49.21	15.34	40.51	44.95	54	-9.05	AV
H	10480	57.63	49.11	15.37	31.31	55.2	68.2	-13.00	PK
H	10480	45.58	49.11	15.37	31.31	43.15	54	-10.85	AV
H	15720	54.24	49.21	15.34	40.51	60.88	74	-13.12	PK
H	15720	37.23	49.21	15.34	40.51	43.87	54	-10.13	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	56.21	49.05	15.3	37.39	59.85	68.2	-8.35	PK
V	10360	38.16	49.05	15.3	37.39	41.8	54	-12.20	AV
V	15540	52.38	49.16	15.27	40.45	58.94	74	-15.06	PK
V	15540	38.52	49.16	15.27	40.45	45.08	54	-8.92	AV
H	10360	56.63	49.05	15.3	37.39	60.27	68.2	-7.93	PK
H	10360	39.28	49.05	15.3	37.39	42.92	54	-11.08	AV
H	15540	51.34	49.16	15.27	40.45	57.9	74	-16.10	PK
H	15540	38.63	49.16	15.27	40.45	45.19	54	-8.81	AV
operation frequency:5200									
V	10400	56.51	49.09	15.34	37.42	60.18	68.2	-8.02	PK
V	10400	39.68	49.09	15.34	37.42	43.35	54	-10.65	AV
V	15600	52.46	49.18	15.29	40.47	59.04	74	-14.96	PK
V	15600	38.21	49.18	15.29	40.47	44.79	54	-9.21	AV
H	10400	55.63	49.09	15.34	37.42	59.3	68.2	-8.90	PK
H	10400	40.85	49.09	15.34	37.42	44.52	54	-9.48	AV
H	15600	53.41	49.18	15.29	40.47	59.99	74	-14.01	PK
H	15600	39.26	49.18	15.29	40.47	45.84	54	-8.16	AV
operation frequency:5240									
V	10480	57.52	49.11	15.37	37.46	61.24	68.2	-6.96	PK
V	10480	40.61	49.11	15.37	37.46	44.33	54	-9.67	AV
V	15720	52.66	49.21	15.34	40.51	59.3	74	-14.70	PK
V	15720	38.27	49.21	15.34	40.51	44.91	54	-9.09	AV
H	10480	57.21	49.11	15.37	31.31	54.78	68.2	-13.42	PK
H	10480	44.86	49.11	15.37	31.31	42.43	54	-11.57	AV
H	15720	51.98	49.21	15.34	40.51	58.62	74	-15.38	PK
H	15720	39.84	49.21	15.34	40.51	46.48	54	-7.52	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	10380	56.21	49.07	15.33	37.41	59.88	68.2	-8.32	PK
V	10380	39.66	49.07	15.33	37.41	43.33	54	-10.67	AV
V	15570	52.88	49.17	15.28	40.46	59.45	74	-14.55	PK
V	15570	38.34	49.17	15.28	40.46	44.91	54	-9.09	AV
H	10380	56.63	49.07	15.33	37.41	60.3	68.2	-7.90	PK
H	10380	40.84	49.07	15.33	37.41	44.51	54	-9.49	AV
H	15570	52.89	49.17	15.28	40.46	59.46	74	-14.54	PK
H	15570	38.45	49.17	15.28	40.46	45.02	54	-8.98	AV
operation frequency:5230									
V	10460	57.11	49.11	15.37	37.46	60.83	68.2	-7.37	PK
V	10460	39.63	49.11	15.37	37.46	43.35	54	-10.65	AV
V	15690	52.28	49.21	15.34	40.51	58.92	74	-15.08	PK
V	15690	38.64	49.21	15.34	40.51	45.28	54	-8.72	AV
H	10460	57.31	49.11	15.37	31.31	54.88	68.2	-13.32	PK
H	10460	44.33	49.11	15.37	31.31	41.9	54	-12.10	AV
H	15690	52.21	49.21	15.34	40.51	58.85	74	-15.15	PK
H	15690	39.29	49.21	15.34	40.51	45.93	54	-8.07	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11ac HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	56.58	49.05	15.3	37.39	60.22	68.2	-7.98	PK
V	10360	39.63	49.05	15.3	37.39	43.27	54	-10.73	AV
V	15540	51.41	49.16	15.27	40.45	57.97	74	-16.03	PK
V	15540	38.21	49.16	15.27	40.45	44.77	54	-9.23	AV
H	10360	56.69	49.05	15.3	37.39	60.33	68.2	-7.87	PK
H	10360	38.52	49.05	15.3	37.39	42.16	54	-11.84	AV
H	15540	52.16	49.16	15.27	40.45	58.72	74	-15.28	PK
H	15540	39.52	49.16	15.27	40.45	46.08	54	-7.92	AV
operation frequency:5200									
V	10400	56.67	49.09	15.34	37.42	60.34	68.2	-7.86	PK
V	10400	41.46	49.09	15.34	37.42	45.13	54	-8.87	AV
V	15600	52.23	49.18	15.29	40.47	58.81	74	-15.19	PK
V	15600	40.34	49.18	15.29	40.47	46.92	54	-7.08	AV
H	10400	55.85	49.09	15.34	37.42	59.52	68.2	-8.68	PK
H	10400	40.26	49.09	15.34	37.42	43.93	54	-10.07	AV
H	15600	53.21	49.18	15.29	40.47	59.79	74	-14.21	PK
H	15600	41.66	49.18	15.29	40.47	48.24	54	-5.76	AV
operation frequency:5240									
V	10480	57.89	49.11	15.37	37.46	61.61	68.2	-6.59	PK
V	10480	40.64	49.11	15.37	37.46	44.36	54	-9.64	AV
V	15720	51.41	49.21	15.34	40.51	58.05	74	-15.95	PK
V	15720	39.63	49.21	15.34	40.51	46.27	54	-7.73	AV
H	10480	57.78	49.11	15.37	31.31	55.35	68.2	-12.85	PK
H	10480	44.66	49.11	15.37	31.31	42.23	54	-11.77	AV
H	15720	52.85	49.21	15.34	40.51	59.49	74	-14.51	PK
H	15720	40.69	49.21	15.34	40.51	47.33	54	-6.67	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11ac 40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	10380	56.52	49.07	15.33	37.41	60.19	68.2	-8.01	PK
V	10380	40.63	49.07	15.33	37.41	44.3	54	-9.70	AV
V	15570	52.74	49.17	15.28	40.46	59.31	74	-14.69	PK
V	15570	39.42	49.17	15.28	40.46	45.99	54	-8.01	AV
H	10380	56.26	49.07	15.33	37.41	59.93	68.2	-8.27	PK
H	10380	40.54	49.07	15.33	37.41	44.21	54	-9.79	AV
H	15570	51.53	49.17	15.28	40.46	58.1	74	-15.90	PK
H	15570	39.68	49.17	15.28	40.46	46.25	54	-7.75	AV
operation frequency:5230									
V	10460	57.21	49.11	15.37	37.46	60.93	68.2	-7.27	PK
V	10460	41.63	49.11	15.37	37.46	45.35	54	-8.65	AV
V	15690	52.27	49.21	15.34	40.51	58.91	74	-15.09	PK
V	15690	39.85	49.21	15.34	40.51	46.49	54	-7.51	AV
H	10460	57.93	49.11	15.37	31.31	55.5	68.2	-12.70	PK
H	10460	44.58	49.11	15.37	31.31	42.15	54	-11.85	AV
H	15690	52.53	49.21	15.34	40.51	59.17	74	-14.83	PK
H	15690	40.47	49.21	15.34	40.51	47.11	54	-6.89	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT80

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5210									
V	10420	56.52	49.07	15.33	37.41	60.19	68.2	-8.01	PK
V	10420	41.66	49.07	15.33	37.41	45.33	54	-8.67	AV
V	15630	51.84	49.17	15.28	40.46	58.41	74	-15.59	PK
V	15630	39.24	49.17	15.28	40.46	45.81	54	-8.19	AV
H	10420	56.63	49.07	15.33	37.41	60.3	68.2	-7.90	PK
H	10420	41.65	49.07	15.33	37.41	45.32	54	-8.68	AV
H	15630	52.62	49.17	15.28	40.46	59.19	74	-14.81	PK
H	15630	40.59	49.17	15.28	40.46	47.16	54	-6.84	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11a band 4

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	11490	54.21	49.05	15.3	37.39	57.85	74	-16.15	PK
V	11490	41.63	49.05	15.3	37.39	45.27	54	-8.73	AV
V	17235	55.28	49.16	15.27	40.45	61.84	68.2	-6.36	PK
V	17235	40.41	49.16	15.27	40.45	46.97	54	-7.03	AV
H	11490	52.66	49.05	15.3	37.39	56.3	74	-17.70	PK
H	11490	42.89	49.05	15.3	37.39	46.53	54	-7.47	AV
H	17235	51.41	49.16	15.27	40.45	57.97	68.2	-10.23	PK
H	17235	40.56	49.16	15.27	40.45	47.12	54	-6.88	AV
operation frequency:5785									
V	11570	51.21	49.09	15.34	37.42	54.88	74	-19.12	PK
V	11570	41.83	49.09	15.34	37.42	45.5	54	-8.50	AV
V	17355	50.89	49.18	15.29	40.47	57.47	68.2	-10.73	PK
V	17355	40.44	49.18	15.29	40.47	47.02	54	-6.98	AV
H	11570	50.85	49.09	15.34	37.42	54.52	74	-19.48	PK
H	11570	42.32	49.09	15.34	37.42	45.99	54	-8.01	AV
H	17355	48.21	49.18	15.29	40.47	54.79	68.2	-13.41	PK
H	17355	40.39	49.18	15.29	40.47	46.97	54	-7.03	AV
operation frequency:5825									
V	11650	52.41	49.11	15.37	37.46	56.13	74	-17.87	PK
V	11650	41.26	49.11	15.37	37.46	44.98	54	-9.02	AV
V	17475	49.68	49.21	15.34	40.51	56.32	68.2	-11.88	PK
V	17475	40.54	49.21	15.34	40.51	47.18	54	-6.82	AV
H	11650	57.21	49.11	15.37	31.31	54.78	74	-19.22	PK
H	11650	48.63	49.11	15.37	31.31	46.2	54	-7.80	AV
H	17475	49.57	49.21	15.34	40.51	56.21	68.2	-11.99	PK
H	17475	40.41	49.21	15.34	40.51	47.05	54	-6.95	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	11490	49.63	49.05	15.3	37.39	53.27	74	-20.73	PK
V	11490	42.54	49.05	15.3	37.39	46.18	54	-7.82	AV
V	17235	48.74	49.16	15.27	40.45	55.3	68.2	-12.90	PK
V	17235	40.13	49.16	15.27	40.45	46.69	54	-7.31	AV
H	11490	49.52	49.05	15.3	37.39	53.16	74	-20.84	PK
H	11490	41.21	49.05	15.3	37.39	44.85	54	-9.15	AV
H	17235	48.96	49.16	15.27	40.45	55.52	68.2	-12.68	PK
H	17235	40.52	49.16	15.27	40.45	47.08	54	-6.92	AV
operation frequency:5785									
V	11570	52.36	49.09	15.34	37.42	56.03	74	-17.97	PK
V	11570	42.67	49.09	15.34	37.42	46.34	54	-7.66	AV
V	17355	49.84	49.18	15.29	40.47	56.42	68.2	-11.78	PK
V	17355	40.21	49.18	15.29	40.47	46.79	54	-7.21	AV
H	11570	49.52	49.09	15.34	37.42	53.19	74	-20.81	PK
H	11570	43.69	49.09	15.34	37.42	47.36	54	-6.64	AV
H	17355	49.52	49.18	15.29	40.47	56.1	68.2	-12.10	PK
H	17355	40.67	49.18	15.29	40.47	47.25	54	-6.75	AV
operation frequency:5825									
V	11650	51.52	49.11	15.37	37.46	55.24	74	-18.76	PK
V	11650	41.26	49.11	15.37	37.46	44.98	54	-9.02	AV
V	17475	48.64	49.21	15.34	40.51	55.28	68.2	-12.92	PK
V	17475	40.57	49.21	15.34	40.51	47.21	54	-6.79	AV
H	11650	57.59	49.11	15.37	31.31	55.16	74	-18.84	PK
H	11650	44.41	49.11	15.37	31.31	41.98	54	-12.02	AV
H	17475	49.63	49.21	15.34	40.51	56.27	68.2	-11.93	PK
H	17475	40.28	49.21	15.34	40.51	46.92	54	-7.08	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5755									
V	11510	49.41	49.07	15.33	37.41	53.08	74	-20.92	PK
V	11510	41.66	49.07	15.33	37.41	45.33	54	-8.67	AV
V	17265	49.48	49.17	15.28	40.46	56.05	68.2	-12.15	PK
V	17265	40.16	49.17	15.28	40.46	46.73	54	-7.27	AV
H	11510	48.52	49.07	15.33	37.41	52.19	74	-21.81	PK
H	11510	41.86	49.07	15.33	37.41	45.53	54	-8.47	AV
H	17265	49.21	49.17	15.28	40.46	55.78	68.2	-12.42	PK
H	17265	40.69	49.17	15.28	40.46	47.26	54	-6.74	AV
operation frequency:5795									
V	11590	49.52	49.11	15.37	37.46	53.24	74	-20.76	PK
V	11590	41.69	49.11	15.37	37.46	45.41	54	-8.59	AV
V	17385	48.14	49.21	15.34	40.51	54.78	68.2	-13.42	PK
V	17385	40.43	49.21	15.34	40.51	47.07	54	-6.93	AV
H	11590	57.55	49.11	15.37	31.31	55.12	74	-18.88	PK
H	11590	44.59	49.11	15.37	31.31	42.16	54	-11.84	AV
H	17385	48.15	49.21	15.34	40.51	54.79	68.2	-13.41	PK
H	17385	40.21	49.21	15.34	40.51	46.85	54	-7.15	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11ac HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	11490	49.69	49.05	15.3	37.39	53.33	74	-20.67	PK
V	11490	42.25	49.05	15.3	37.39	45.89	54	-8.11	AV
V	17235	48.51	49.16	15.27	40.45	55.07	68.2	-13.13	PK
V	17235	40.34	49.16	15.27	40.45	46.9	54	-7.10	AV
H	11490	48.88	49.05	15.3	37.39	52.52	74	-21.48	PK
H	11490	41.63	49.05	15.3	37.39	45.27	54	-8.73	AV
H	17235	48.21	49.16	15.27	40.45	54.77	68.2	-13.43	PK
H	17235	40.96	49.16	15.27	40.45	47.52	54	-6.48	AV
operation frequency:5785									
V	11570	48.52	49.09	15.34	37.42	52.19	74	-21.81	PK
V	11570	41.13	49.09	15.34	37.42	44.8	54	-9.20	AV
V	17355	49.77	49.18	15.29	40.47	56.35	68.2	-11.85	PK
V	17355	40.66	49.18	15.29	40.47	47.24	54	-6.76	AV
H	11570	49.55	49.09	15.34	37.42	53.22	74	-20.78	PK
H	11570	43.46	49.09	15.34	37.42	47.13	54	-6.87	AV
H	17355	49.21	49.18	15.29	40.47	55.79	68.2	-12.41	PK
H	17355	40.96	49.18	15.29	40.47	47.54	54	-6.46	AV
operation frequency:5825									
V	11650	49.85	49.11	15.37	37.46	53.57	74	-20.43	PK
V	11650	41.86	49.11	15.37	37.46	45.58	54	-8.42	AV
V	17475	48.14	49.21	15.34	40.51	54.78	68.2	-13.42	PK
V	17475	40.21	49.21	15.34	40.51	46.85	54	-7.15	AV
H	11650	57.69	49.11	15.37	31.31	55.26	74	-18.74	PK
H	11650	44.52	49.11	15.37	31.31	42.09	54	-11.91	AV
H	17475	48.43	49.21	15.34	40.51	55.07	68.2	-13.13	PK
H	17475	40.58	49.21	15.34	40.51	47.22	54	-6.78	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11ac HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5755									
V	11510	49.44	49.07	15.33	37.41	53.11	74	-20.89	PK
V	11510	42.83	49.07	15.33	37.41	46.5	54	-7.50	AV
V	17265	48.28	49.17	15.28	40.46	54.85	68.2	-13.35	PK
V	17265	41.63	49.17	15.28	40.46	48.2	54	-5.80	AV
H	11510	48.84	49.07	15.33	37.41	52.51	74	-21.49	PK
H	11510	42.91	49.07	15.33	37.41	46.58	54	-7.42	AV
H	17265	48.96	49.17	15.28	40.46	55.53	68.2	-12.67	PK
H	17265	40.41	49.17	15.28	40.46	46.98	54	-7.02	AV

operation frequency:5795

V	11590	49.66	49.11	15.37	37.46	53.38	74	-20.62	PK
V	11590	41.85	49.11	15.37	37.46	45.57	54	-8.43	AV
V	17385	48.76	49.21	15.34	40.51	55.4	68.2	-12.80	PK
V	17385	40.85	49.21	15.34	40.51	47.49	54	-6.51	AV
H	11590	57.53	49.11	15.37	31.31	55.1	74	-18.90	PK
H	11590	44.34	49.11	15.37	31.31	41.91	54	-12.09	AV
H	17385	48.47	49.21	15.34	40.51	55.11	68.2	-13.09	PK
H	17385	40.63	49.21	15.34	40.51	47.27	54	-6.73	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT80

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5775									
V	11550	48.21	49.07	15.33	37.41	51.88	74	-22.12	PK
V	11550	42.23	49.07	15.33	37.41	45.9	54	-8.10	AV
V	17325	49.38	49.17	15.28	40.46	55.95	68.2	-12.25	PK
V	17325	40.66	49.17	15.28	40.46	47.23	54	-6.77	AV
H	11550	48.35	49.07	15.33	37.41	52.02	74	-21.98	PK
H	11550	41.23	49.07	15.33	37.41	44.9	54	-9.10	AV
H	17325	48.85	49.17	15.28	40.46	55.42	68.2	-12.78	PK
H	17325	40.69	49.17	15.28	40.46	47.26	54	-6.74	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

15.407 (b)

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	5000MHz
Stop Frequency	5420MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


The horizontal and vertical polarities of the antenna were tested, and a pre-test was conducted on the EUT placement as three orthogonal axes X,Y,Z. The worst display of the test results was the Y-axis. The worst case emissions were reported.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

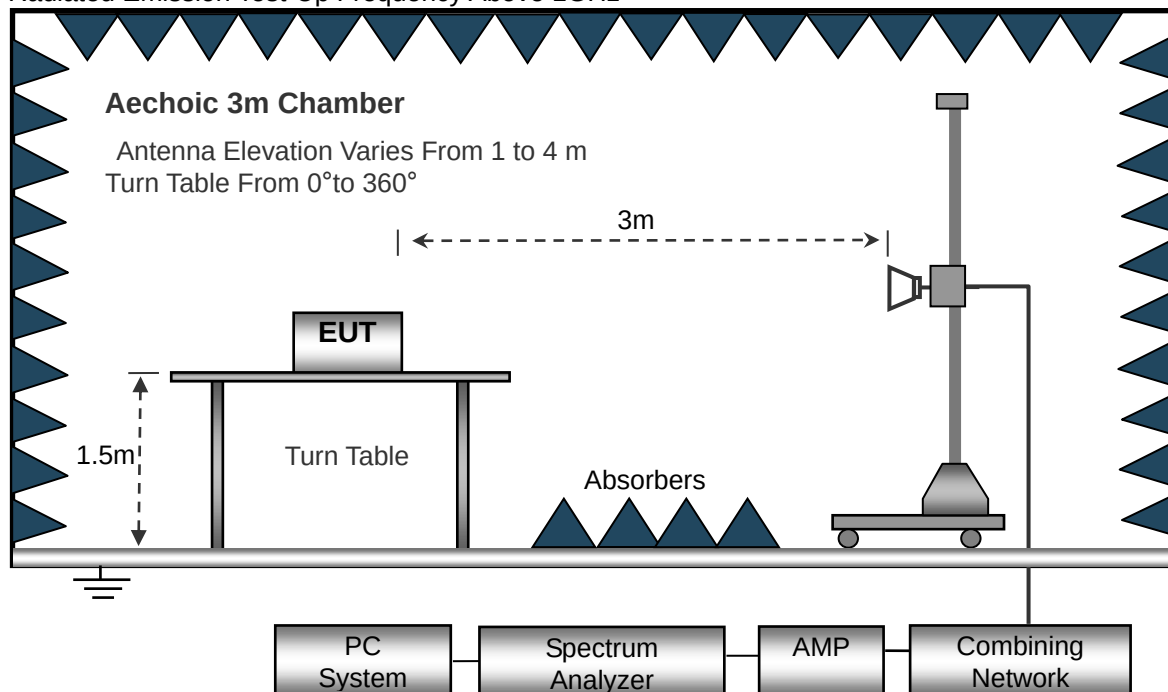

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.3.6 TEST RESULT**

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	5150	53.35	49.12	15.6	37.34	57.17	74	-16.83	PK
V	5150	39.85	49.12	15.6	37.34	43.67	54	-10.33	AV
V	5145	54.14	49.19	15.24	40.43	60.62	74	-13.38	PK
V	5145	36.36	49.19	15.24	40.43	42.84	54	-11.16	AV
H	5150	52.41	49.12	15.6	37.34	56.23	74	-17.77	PK
H	5150	37.79	49.12	15.6	37.34	41.61	54	-12.39	AV
H	5145	54.55	49.19	15.24	40.43	61.03	74	-12.97	PK
H	5145	33.96	49.19	15.24	40.43	40.44	54	-13.56	AV
operation frequency:5240									
V	5350	53.21	49.13	15.32	37.46	56.86	74	-17.14	PK
V	5350	35.46	49.13	15.32	37.46	39.11	54	-14.89	AV
V	5370	53.51	49.24	15.36	40.51	60.14	74	-13.86	PK
V	5370	32.69	49.24	15.36	40.51	39.32	54	-14.68	AV
H	5350	52.15	49.13	15.32	31.31	49.65	74	-24.35	PK
H	5350	40.41	49.13	15.32	31.31	37.91	54	-16.09	AV
H	5370	52.36	49.24	15.36	40.51	58.99	74	-15.01	PK
H	5370	32.58	49.24	15.36	40.51	39.21	54	-14.79	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	5150	51.56	49.12	15.6	37.34	55.38	74	-18.62	PK
V	5150	33.14	49.12	15.6	37.34	36.96	54	-17.04	AV
V	5145	51.58	49.19	15.24	40.43	58.06	74	-15.94	PK
V	5145	33.63	49.19	15.24	40.43	40.11	54	-13.89	AV
H	5150	51.21	49.12	15.6	37.34	55.03	74	-18.97	PK
H	5150	33.46	49.12	15.6	37.34	37.28	54	-16.72	AV
H	5145	50.52	49.19	15.24	40.43	57	74	-17	PK
H	5145	32.83	49.19	15.24	40.43	39.31	54	-14.69	AV
operation frequency:5240									
V	5350	53.26	49.13	15.32	37.46	56.91	74	-17.09	PK
V	5350	35.44	49.13	15.32	37.46	39.09	54	-14.91	AV
V	5370	53.85	49.24	15.36	40.51	60.48	74	-13.52	PK
V	5370	32.63	49.24	15.36	40.51	39.26	54	-14.74	AV
H	5350	52.52	49.13	15.32	31.31	50.02	74	-23.98	PK
H	5350	40.42	49.13	15.32	31.31	37.92	54	-16.08	AV
H	5370	52.32	49.24	15.36	40.51	58.95	74	-15.05	PK
H	5370	32.53	49.24	15.36	40.51	39.16	54	-14.84	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11ac HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5180									
V	5150	52.63	49.12	15.33	37.41	56.25	74	-17.75	PK
V	5150	34.68	49.12	15.33	37.41	38.3	54	-15.7	AV
V	5145	51.21	49.19	15.28	40.46	57.76	74	-16.24	PK
V	5145	33.63	49.19	15.28	40.46	40.18	54	-13.82	AV
H	5150	52.21	49.12	15.33	37.41	55.83	74	-18.17	PK
H	5150	34.85	49.12	15.33	37.41	38.47	54	-15.53	AV
H	5145	50.86	49.19	15.28	40.46	57.41	74	-16.59	PK
H	5145	33.49	49.19	15.28	40.46	40.04	54	-13.96	AV
operation frequency:5240									
V	5350	53.21	49.13	15.32	37.46	56.86	74	-17.14	PK
V	5350	36.29	49.13	15.32	37.46	39.94	54	-14.06	AV
V	5370	50.52	49.24	15.36	40.51	57.15	74	-16.85	PK
V	5370	33.66	49.24	15.36	40.51	40.29	54	-13.71	AV
H	5350	53.21	49.13	15.32	31.31	50.71	74	-23.29	PK
H	5350	40.89	49.13	15.32	31.31	38.39	54	-15.61	AV
H	5370	51.35	49.24	15.36	40.51	57.98	74	-16.02	PK
H	5370	35.22	49.24	15.36	40.51	41.85	54	-12.15	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	5150	52.96	49.12	15.6	37.39	56.83	74	-17.17	PK
V	5150	35.65	49.12	15.6	37.39	39.52	54	-14.48	AV
V	5145	51.14	49.19	15.24	40.45	57.64	74	-16.36	PK
V	5145	34.96	49.19	15.24	40.45	41.46	54	-12.54	AV
H	5150	52.52	49.12	15.6	37.39	56.39	74	-17.61	PK
H	5150	34.61	49.12	15.6	37.39	38.48	54	-15.52	AV
H	5145	50.53	49.19	15.24	40.45	57.03	74	-16.97	PK
H	5145	35.85	49.19	15.24	40.45	42.35	54	-11.65	AV
operation frequency:5230									
V	5350	53.26	49.13	15.34	37.46	56.93	74	-17.07	PK
V	5350	37.37	49.13	15.34	37.46	41.04	54	-12.96	AV
V	5370	50.84	49.24	15.35	40.51	57.46	74	-16.54	PK
V	5370	36.63	49.24	15.35	40.51	43.25	54	-10.75	AV
H	5350	54.15	49.13	15.34	31.31	51.67	74	-22.33	PK
H	5350	41.82	49.13	15.34	31.31	39.34	54	-14.66	AV
H	5370	52.29	49.24	15.35	40.51	58.91	74	-15.09	PK
H	5370	36.24	49.24	15.35	40.51	42.86	54	-11.14	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11ac HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	5150	52.69	49.12	15.32	37.41	56.3	74	-17.7	PK
V	5150	37.45	49.12	15.32	37.41	41.06	54	-12.94	AV
V	5145	52.14	49.19	15.36	40.46	58.77	74	-15.23	PK
V	5145	36.63	49.19	15.36	40.46	43.26	54	-10.74	AV
H	5150	52.88	49.12	15.32	37.41	56.49	74	-17.51	PK
H	5150	37.63	49.12	15.32	37.41	41.24	54	-12.76	AV
H	5145	51.65	49.19	15.36	40.46	58.28	74	-15.72	PK
H	5145	36.11	49.19	15.36	40.46	42.74	54	-11.26	AV
operation frequency:5230									
V	5350	54.26	49.13	15.34	37.34	57.81	74	-16.19	PK
V	5350	36.68	49.13	15.34	37.34	40.23	54	-13.77	AV
V	5370	51.55	49.24	15.35	40.43	58.09	74	-15.91	PK
V	5370	36.71	49.24	15.35	40.43	43.25	54	-10.75	AV
H	5350	54.59	49.13	15.34	37.34	58.14	74	-15.86	PK
H	5350	41.52	49.13	15.34	37.34	45.07	54	-8.93	AV
H	5370	50.63	49.24	15.35	40.43	57.17	74	-16.83	PK
H	5370	35.85	49.24	15.35	40.43	42.39	54	-11.61	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11ac HT80

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5210									
V	5150	52.69	49.13	15.32	37.48	56.36	74	-17.64	PK
V	5150	35.94	49.13	15.32	37.48	39.61	54	-14.39	AV
V	5145	51.85	49.24	15.36	40.42	58.39	74	-15.61	PK
V	5145	35.21	49.24	15.36	40.42	41.75	54	-12.25	AV
H	5150	52.63	49.13	15.32	37.48	56.3	74	-17.7	PK
H	5150	36.68	49.13	15.32	37.48	40.35	54	-13.65	AV
H	5145	50.41	49.24	15.36	40.42	56.95	74	-17.05	PK
H	5145	35.96	49.24	15.36	40.42	42.5	54	-11.5	AV
operation frequency:5210									
V	5350	52.24	49.13	15.32	37.48	55.91	74	-18.09	PK
V	5350	35.96	49.13	15.32	37.48	39.63	54	-14.37	AV
V	5370	51.21	49.24	15.36	40.42	57.75	74	-16.25	PK
V	5370	35.85	49.24	15.36	40.42	42.39	54	-11.61	AV
H	5350	52.61	49.13	15.32	37.48	56.28	74	-17.72	PK
H	5350	36.63	49.13	15.32	37.48	40.3	54	-13.7	AV
H	5370	50.48	49.24	15.36	40.42	57.02	74	-16.98	PK
H	5370	35.11	49.24	15.36	40.42	41.65	54	-12.35	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11a

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	5725	51.22	48.32	15.24	37.37	55.51	68.2	-12.69	PK
V	5725	40.84	48.32	15.24	37.37	45.13	54	-8.87	AV
V	5720	51.99	48.36	15.27	37.39	56.29	74	-17.71	PK
V	5720	41.58	48.36	15.27	37.39	45.88	54	-8.12	AV
H	5725	51.53	48.32	15.24	37.37	55.82	68.2	-12.38	PK
H	5725	40.67	48.32	15.24	37.37	44.96	54	-9.04	AV
H	5720	50.16	48.36	15.27	37.39	54.46	74	-19.54	PK
H	5720	40.67	48.36	15.27	37.39	44.97	54	-9.03	AV
operation frequency:5825									
V	5850	51.16	46.38	12.43	35.65	52.86	68.2	-15.34	PK
V	5850	40.88	46.38	12.43	35.65	42.58	54	-11.42	AV
V	5870	51.14	46.56	12.47	35.76	52.81	68.2	-15.39	PK
V	5870	40.63	46.56	12.47	35.76	42.3	54	-11.7	AV
H	5850	50.58	46.38	12.43	35.65	52.28	68.2	-15.92	PK
H	5850	40.63	46.38	12.43	35.65	42.33	54	-11.67	AV
H	5870	51.14	46.56	12.47	35.76	52.81	68.2	-15.39	PK
H	5870	40.36	46.56	12.47	35.76	42.03	54	-11.97	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	5725	55.25	46.55	12.65	35.87	57.22	68.2	-10.98	PK
V	5725	42.96	46.55	12.65	35.87	44.93	54	-9.07	AV
V	5720	55.85	46.58	12.67	35.93	57.87	68.2	-10.33	PK
V	5720	42.35	46.58	12.67	35.93	44.37	54	-9.63	AV
H	5725	55.63	46.55	12.65	35.87	57.6	68.2	-10.6	PK
H	5725	42.41	46.55	12.65	35.87	44.38	54	-9.62	AV
H	5720	55.18	46.58	12.67	35.93	57.2	68.2	-11	PK
H	5720	42.36	46.58	12.67	35.93	44.38	54	-9.62	AV
operation frequency:5825									
V	5850	50.14	47.36	13.18	36.26	52.22	68.2	-15.98	PK
V	5850	40.38	47.36	13.18	36.26	42.46	54	-11.54	AV
V	5870	51.43	47.38	13.2	36.29	53.54	68.2	-14.66	PK
V	5870	41.14	47.38	13.2	36.29	43.25	54	-10.75	AV
H	5850	51.19	47.36	13.18	36.26	53.27	68.2	-14.93	PK
H	5850	41.64	47.36	13.18	36.26	43.72	54	-10.28	AV
H	5870	51.36	47.38	13.2	36.29	53.47	68.2	-14.73	PK
H	5870	40.57	47.38	13.2	36.29	42.68	54	-11.32	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:5180									
V	5725	50.25	48.32	15.24	37.37	54.54	68.2	-13.66	PK
V	5725	41.52	48.32	15.24	37.37	45.81	54	-8.19	AV
V	5720	51.14	48.36	15.27	37.39	55.44	74	-18.56	PK
V	5720	41.19	48.36	15.27	37.39	45.49	54	-8.51	AV
H	5725	50.52	48.32	15.24	37.37	54.81	68.2	-13.39	PK
H	5725	40.21	48.32	15.24	37.37	44.5	54	-9.5	AV
H	5720	51.63	48.36	15.27	37.39	55.93	74	-18.07	PK
H	5720	40.85	48.36	15.27	37.39	45.15	54	-8.85	AV
operation frequency:5240									
V	5850	51.21	46.38	12.43	35.65	52.91	68.2	-15.29	PK
V	5850	40.73	46.38	12.43	35.65	42.43	54	-11.57	AV
V	5870	51.85	46.56	12.47	35.76	53.52	68.2	-14.68	PK
V	5870	40.94	46.56	12.47	35.76	42.61	54	-11.39	AV
H	5850	51.21	46.38	12.43	35.65	52.91	68.2	-15.29	PK
H	5850	40.93	46.38	12.43	35.65	42.63	54	-11.37	AV
H	5870	51.85	46.56	12.47	35.76	53.52	68.2	-14.68	PK
H	5870	40.83	46.56	12.47	35.76	42.5	54	-11.5	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5755									
V	5725	56.58	46.55	12.65	35.87	58.55	68.2	-9.65	PK
V	5725	43.69	46.55	12.65	35.87	45.66	54	-8.34	AV
V	5720	56.74	46.58	12.67	35.93	58.76	68.2	-9.44	PK
V	5720	43.21	46.58	12.67	35.93	45.23	54	-8.77	AV
H	5725	55.63	46.55	12.65	35.87	57.6	68.2	-10.6	PK
H	5725	42.34	46.55	12.65	35.87	44.31	54	-9.69	AV
H	5720	55.36	46.58	12.67	35.93	57.38	68.2	-10.82	PK
H	5720	42.67	46.58	12.67	35.93	44.69	54	-9.31	AV
operation frequency:5795									
V	5850	51.21	47.36	13.18	36.26	53.29	68.2	-14.91	PK
V	5850	41.63	47.36	13.18	36.26	43.71	54	-10.29	AV
V	5870	51.21	47.38	13.2	36.29	53.32	68.2	-14.88	PK
V	5870	41.85	47.38	13.2	36.29	43.96	54	-10.04	AV
H	5850	51.21	47.36	13.18	36.26	53.29	68.2	-14.91	PK
H	5850	41.52	47.36	13.18	36.26	43.6	54	-10.4	AV
H	5870	51.27	47.38	13.2	36.29	53.38	68.2	-14.82	PK
H	5870	40.15	47.38	13.2	36.29	42.26	54	-11.74	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	5725	51.14	48.32	15.24	37.37	55.43	68.2	-12.77	PK
V	5725	41.33	48.32	15.24	37.37	45.62	54	-8.38	AV
V	5720	51.38	48.36	15.27	37.39	55.68	74	-18.32	PK
V	5720	41.65	48.36	15.27	37.39	45.95	54	-8.05	AV
H	5725	51.53	48.32	15.24	37.37	55.82	68.2	-12.38	PK
H	5725	40.14	48.32	15.24	37.37	44.43	54	-9.57	AV
H	5720	51.18	48.36	15.27	37.39	55.48	74	-18.52	PK
H	5720	40.36	48.36	15.27	37.39	44.66	54	-9.34	AV
operation frequency:5230									
V	5850	51.21	46.38	12.43	35.65	52.91	68.2	-15.29	PK
V	5850	40.18	46.38	12.43	35.65	41.88	54	-12.12	AV
V	5870	51.58	46.56	12.47	35.76	53.25	68.2	-14.95	PK
V	5870	40.63	46.56	12.47	35.76	42.3	54	-11.7	AV
H	5850	51.41	46.38	12.43	35.65	53.11	68.2	-15.09	PK
H	5850	40.83	46.38	12.43	35.65	42.53	54	-11.47	AV
H	5870	51.18	46.56	12.47	35.76	52.85	68.2	-15.35	PK
H	5870	40.31	46.56	12.47	35.76	41.98	54	-12.02	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT80

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5775									
V	5725	55.21	46.55	12.65	35.87	57.18	68.2	-11.02	PK
V	5725	42.36	46.55	12.65	35.87	44.33	54	-9.67	AV
V	5720	54.84	46.58	12.67	35.93	56.86	68.2	-11.34	PK
V	5720	42.48	46.58	12.67	35.93	44.5	54	-9.5	AV
H	5725	55.62	46.55	12.65	35.87	57.59	68.2	-10.61	PK
H	5725	43.34	46.55	12.65	35.87	45.31	54	-8.69	AV
H	5720	55.11	46.58	12.67	35.93	57.13	68.2	-11.07	PK
H	5720	42.26	46.58	12.67	35.93	44.28	54	-9.72	AV
V	5850	51.21	47.36	13.18	36.26	53.29	68.2	-14.91	PK
V	5850	41.88	47.36	13.18	36.26	43.96	54	-10.04	AV
V	5870	51.63	47.38	13.2	36.29	53.74	68.2	-14.46	PK
V	5870	40.52	47.38	13.2	36.29	42.63	54	-11.37	AV
H	5850	51.63	47.36	13.18	36.26	53.71	68.2	-14.49	PK
H	5850	40.41	47.36	13.18	36.26	42.49	54	-11.51	AV
H	5870	51.33	47.38	13.2	36.29	53.44	68.2	-14.76	PK
H	5870	41.21	47.38	13.2	36.29	43.32	54	-10.68	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Note:1. The antenna gain is compensated in the test data.



3.3 CONDUCTED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.407

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	5150MHz	5725MHz
Stop Frequency	5250MHz	5850MHz
RB / VB (emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 10Hz for Average	


3.3.2 TEST PROCEDURE

Test method: FCC KDB 789033 G)& Parts 15.407(b)(4) & 15.209(a)

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

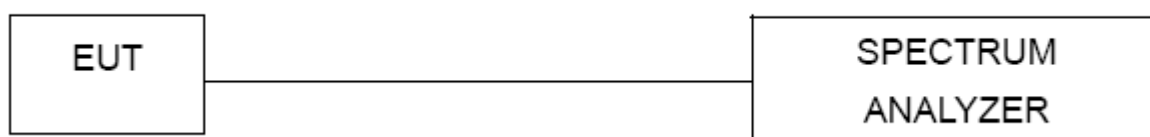

3.3.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




3.3.6 TEST RESULT

The antenna gain is compensated in the test data.

802.11a

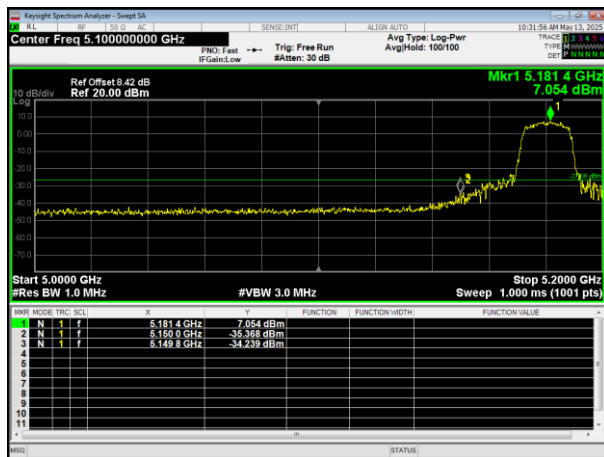


5180MHz

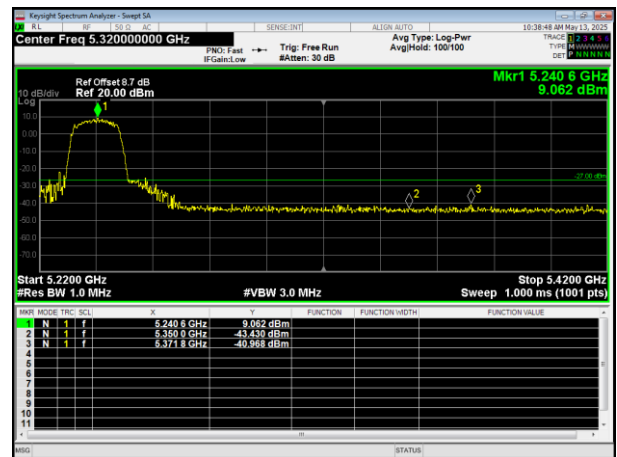


5240MHz

802.11ac HT20

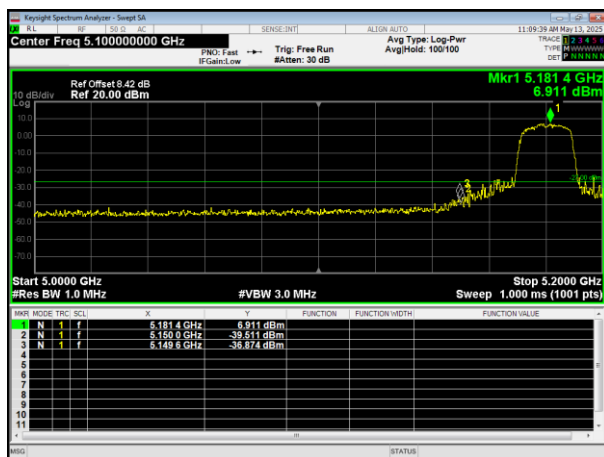


5180MHz

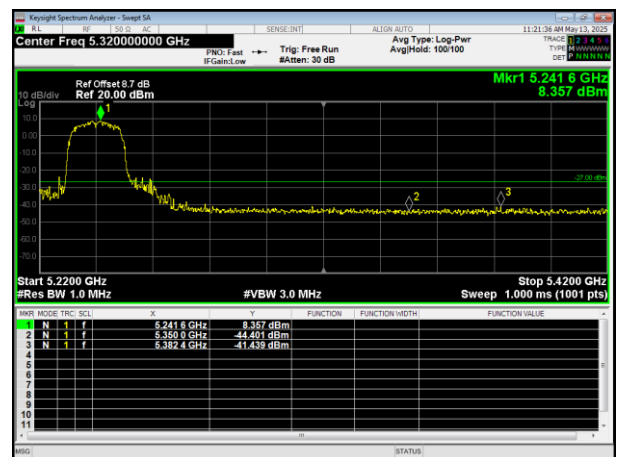


5240MHz

802.11ac HT40

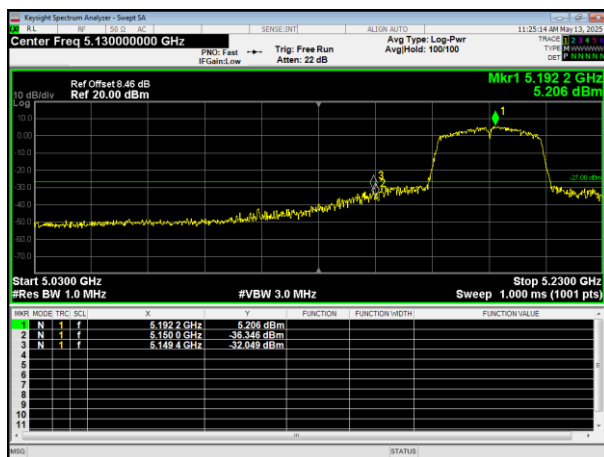


5190MHz

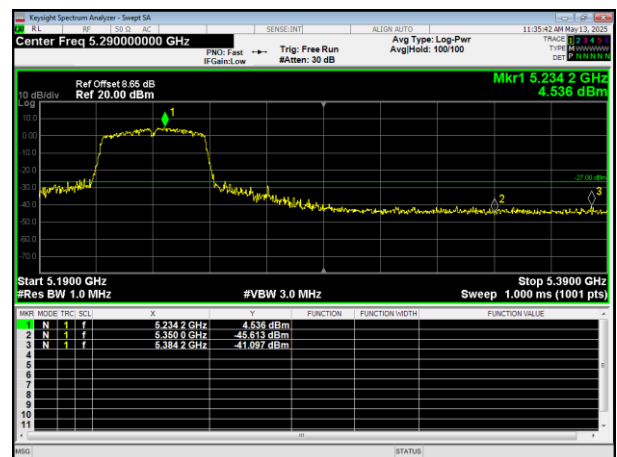


5230MHz



802.11n HT20

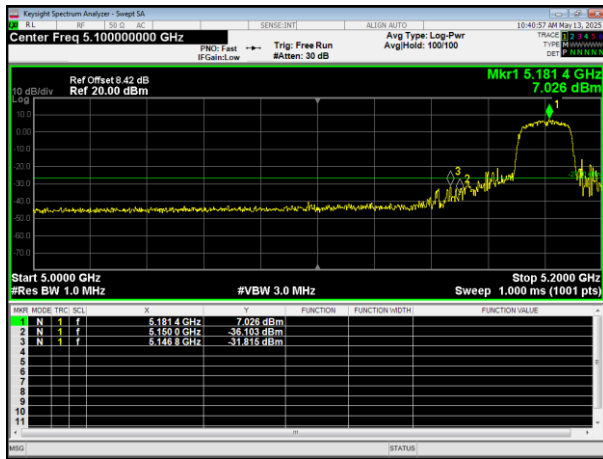


5180MHz

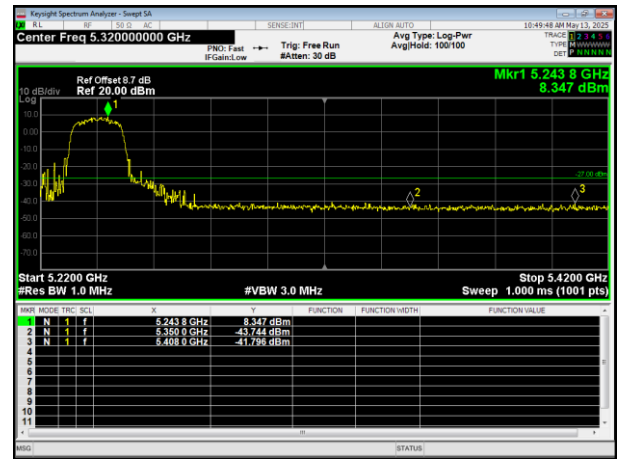


5240MHz

802.11n HT40

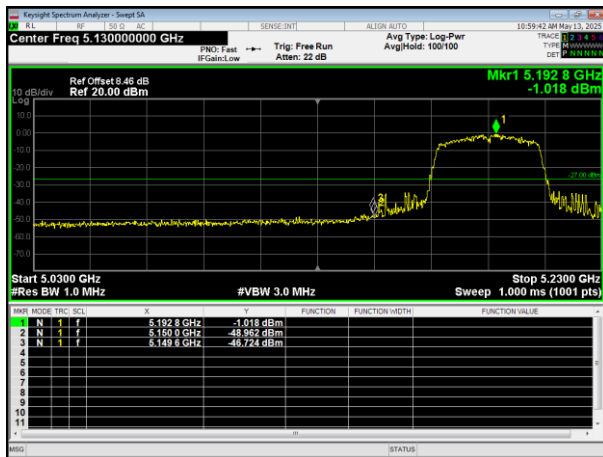

5190MHz

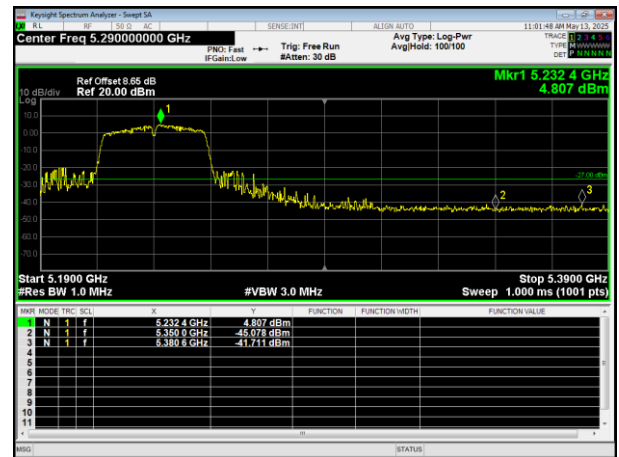


5230MHz

802.11ac HT80




5210MHz

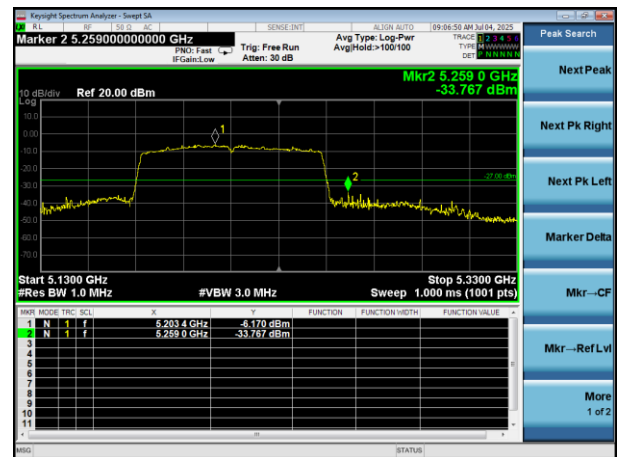




802.11a

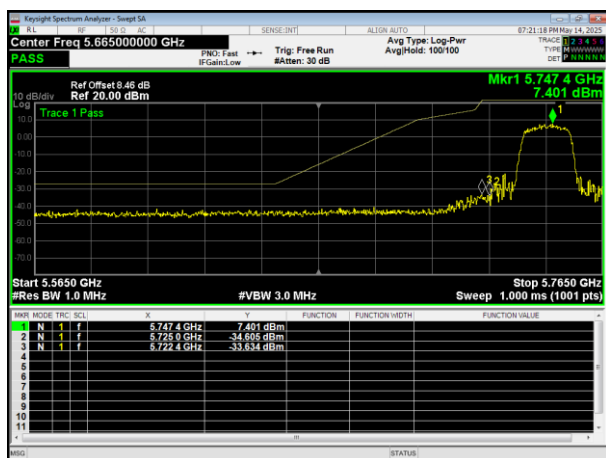


5745MHz

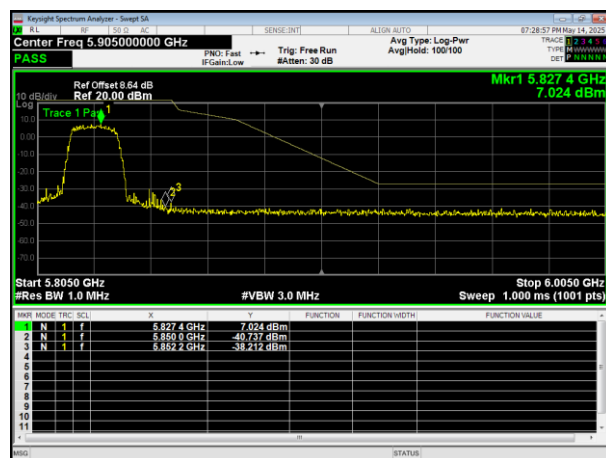


5825MHz

802.11ac HT20

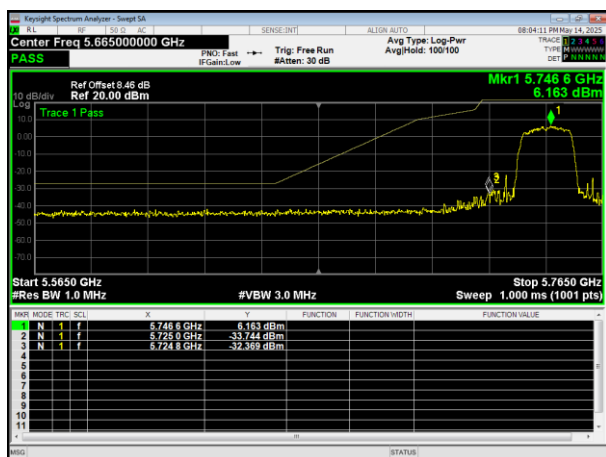


5745MHz

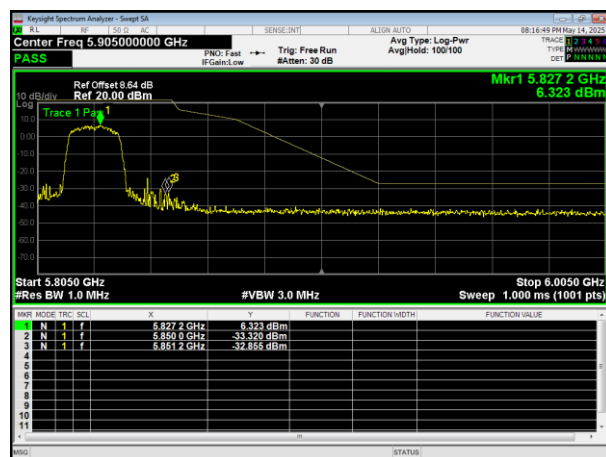

5825MHz

802.11ac HT40

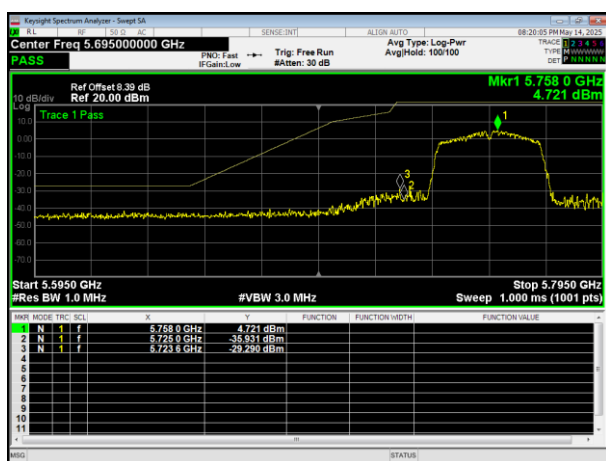


5755MHz




5795MHz



802.11n HT20

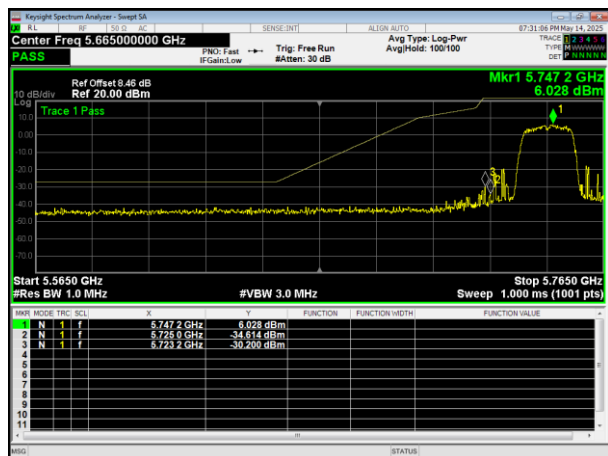


5745MHz

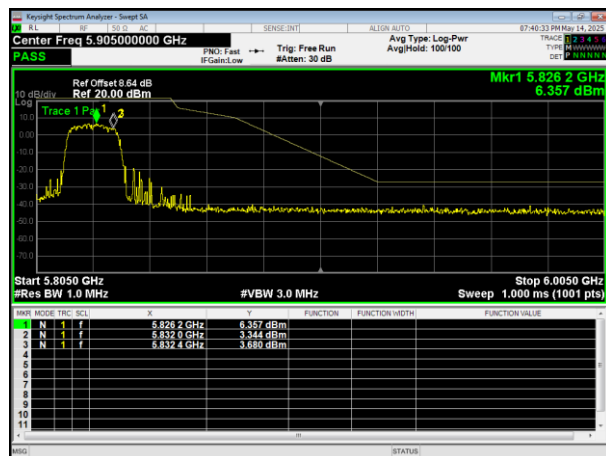


5825MHz

802.11n HT40

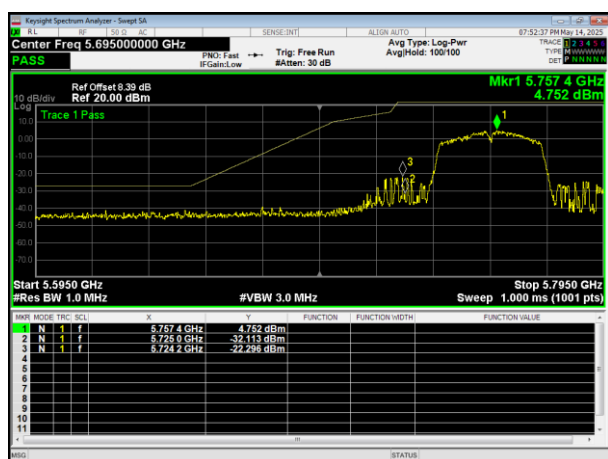

5755MHz

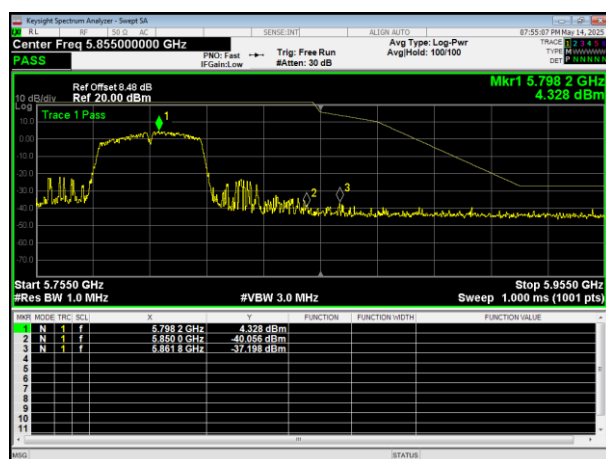


5795MHz

802.11ac HT80



5775MHz

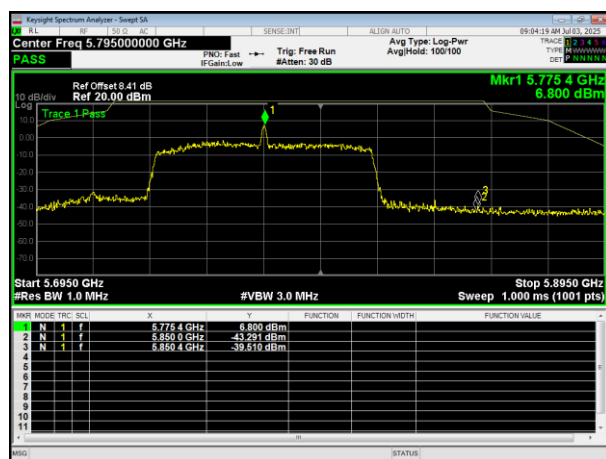



4.. AVERAGING OUTPUT POWER

4.1. APPLIED PROCEDURES / LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.


4.1.1. TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW = 1MHz
Span $\geq 99\%$ OBW(30MHz/60MHz/120MHz etc.)
VBW $\geq 3 \times$ RBW
Sweep = auto
Detector function = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
Trace = max hold

4.1.2. DEVIATION FROM STANDARD

No deviation.

4.1.3. TEST SETUP

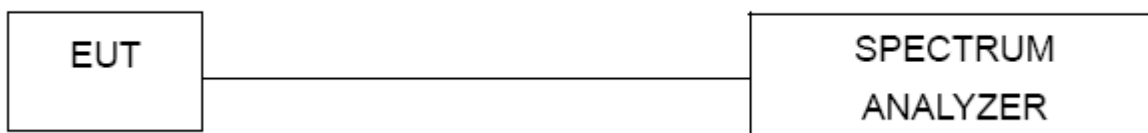

4.1.4. EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.