



2TX Antenna 4 + Antenna 3 CDD MODE


| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|
|--------------------|------|--|

PSD Results

| Channel | Frequency (MHz) | Ant 4 Meas (dBm/ 3kHz) | Ant 3 Meas (dBm/ 3kHz) | Total Corr'd PSD (dBm/ 3kHz) | Limit (dBm/ 3kHz) | Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|--|-------------------------|----------------|
| Low 1 | 2412 | -8.166 | -8.709 | -5.42 | 8.0 | -13.4 |
| Low 2 | 2417 | -6.950 | -7.087 | -4.01 | 8.0 | -12.0 |
| Low 3 | 2422 | -6.018 | -4.850 | -2.38 | 8.0 | -10.4 |
| Mid 6 | 2437 | -5.993 | -3.644 | -1.65 | 8.0 | -9.7 |
| High 9 | 2452 | -6.084 | -4.881 | -2.43 | 8.0 | -10.4 |
| High 10 | 2457 | -7.054 | -6.835 | -3.93 | 8.0 | -11.9 |
| High 11 | 2462 | -8.853 | -8.740 | -5.79 | 8.0 | -13.8 |
| High 12 | 2467 | -10.013 | -9.940 | -6.97 | 8.0 | -15.0 |
| High 13 | 2472 | -19.153 | -19.018 | -16.07 | 8.0 | -24.1 |

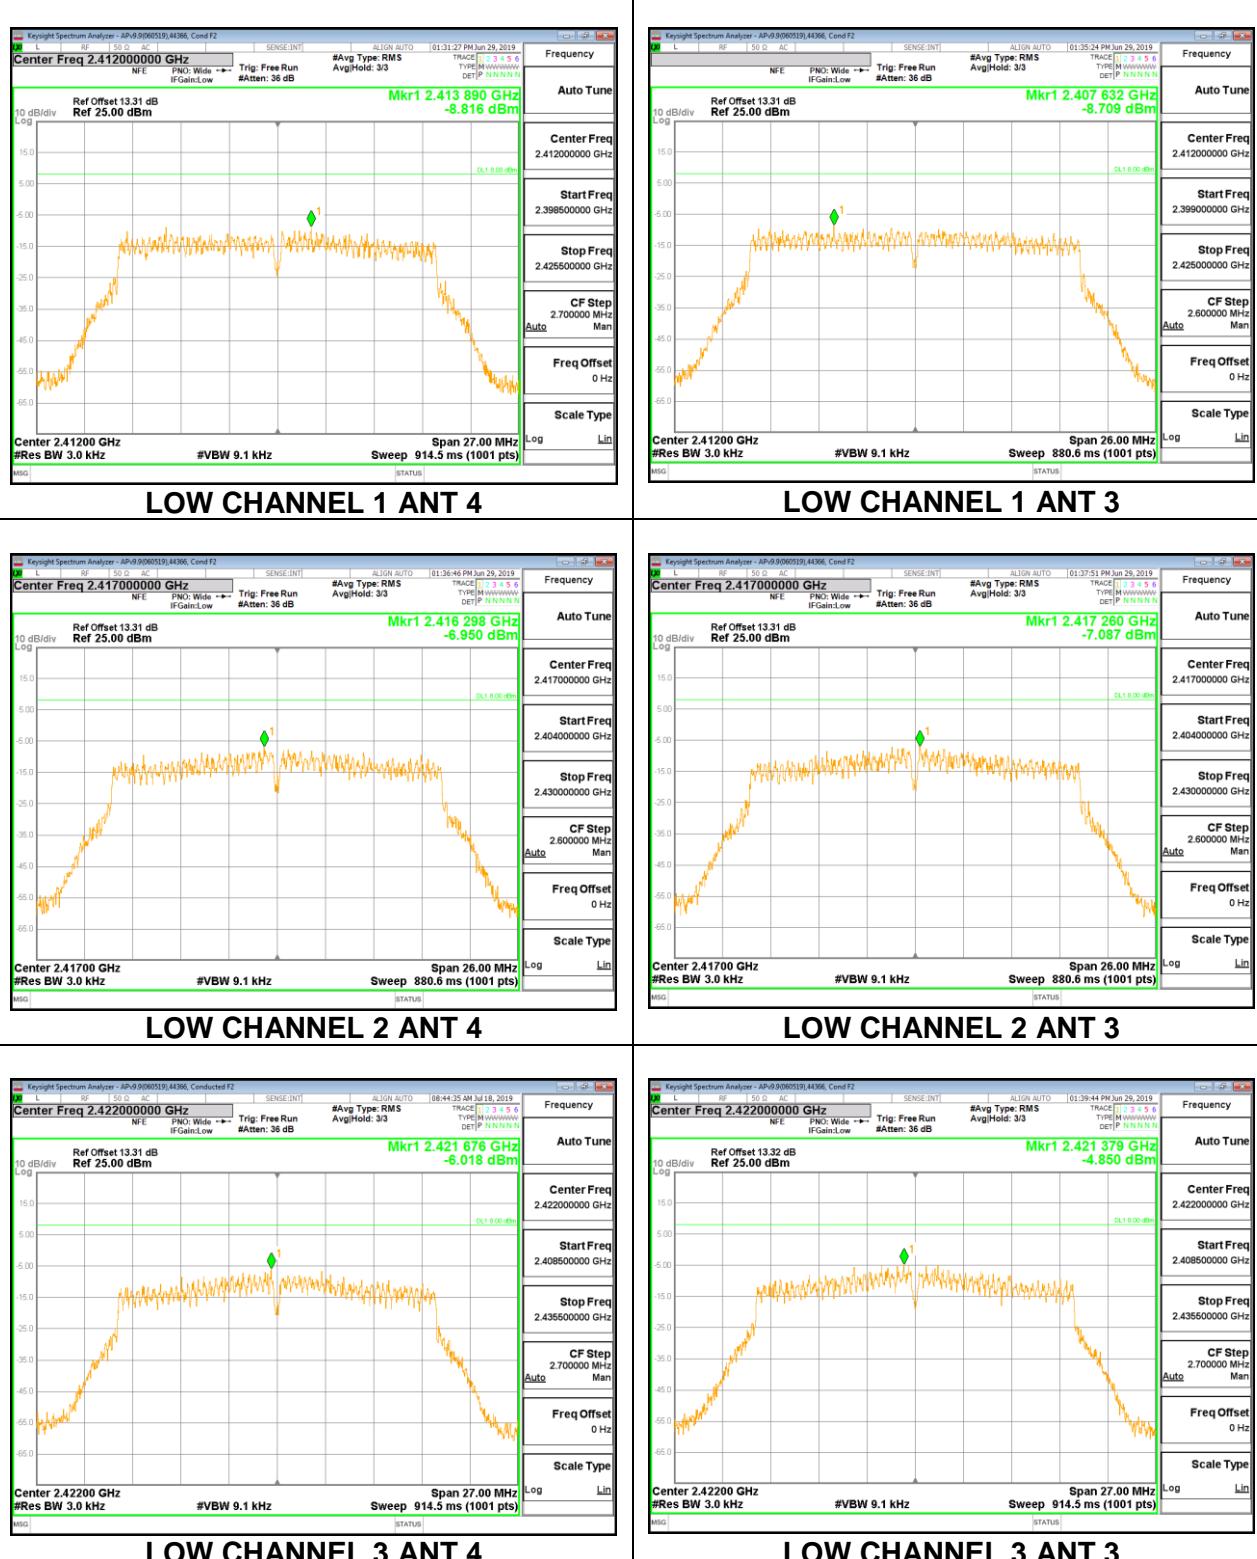

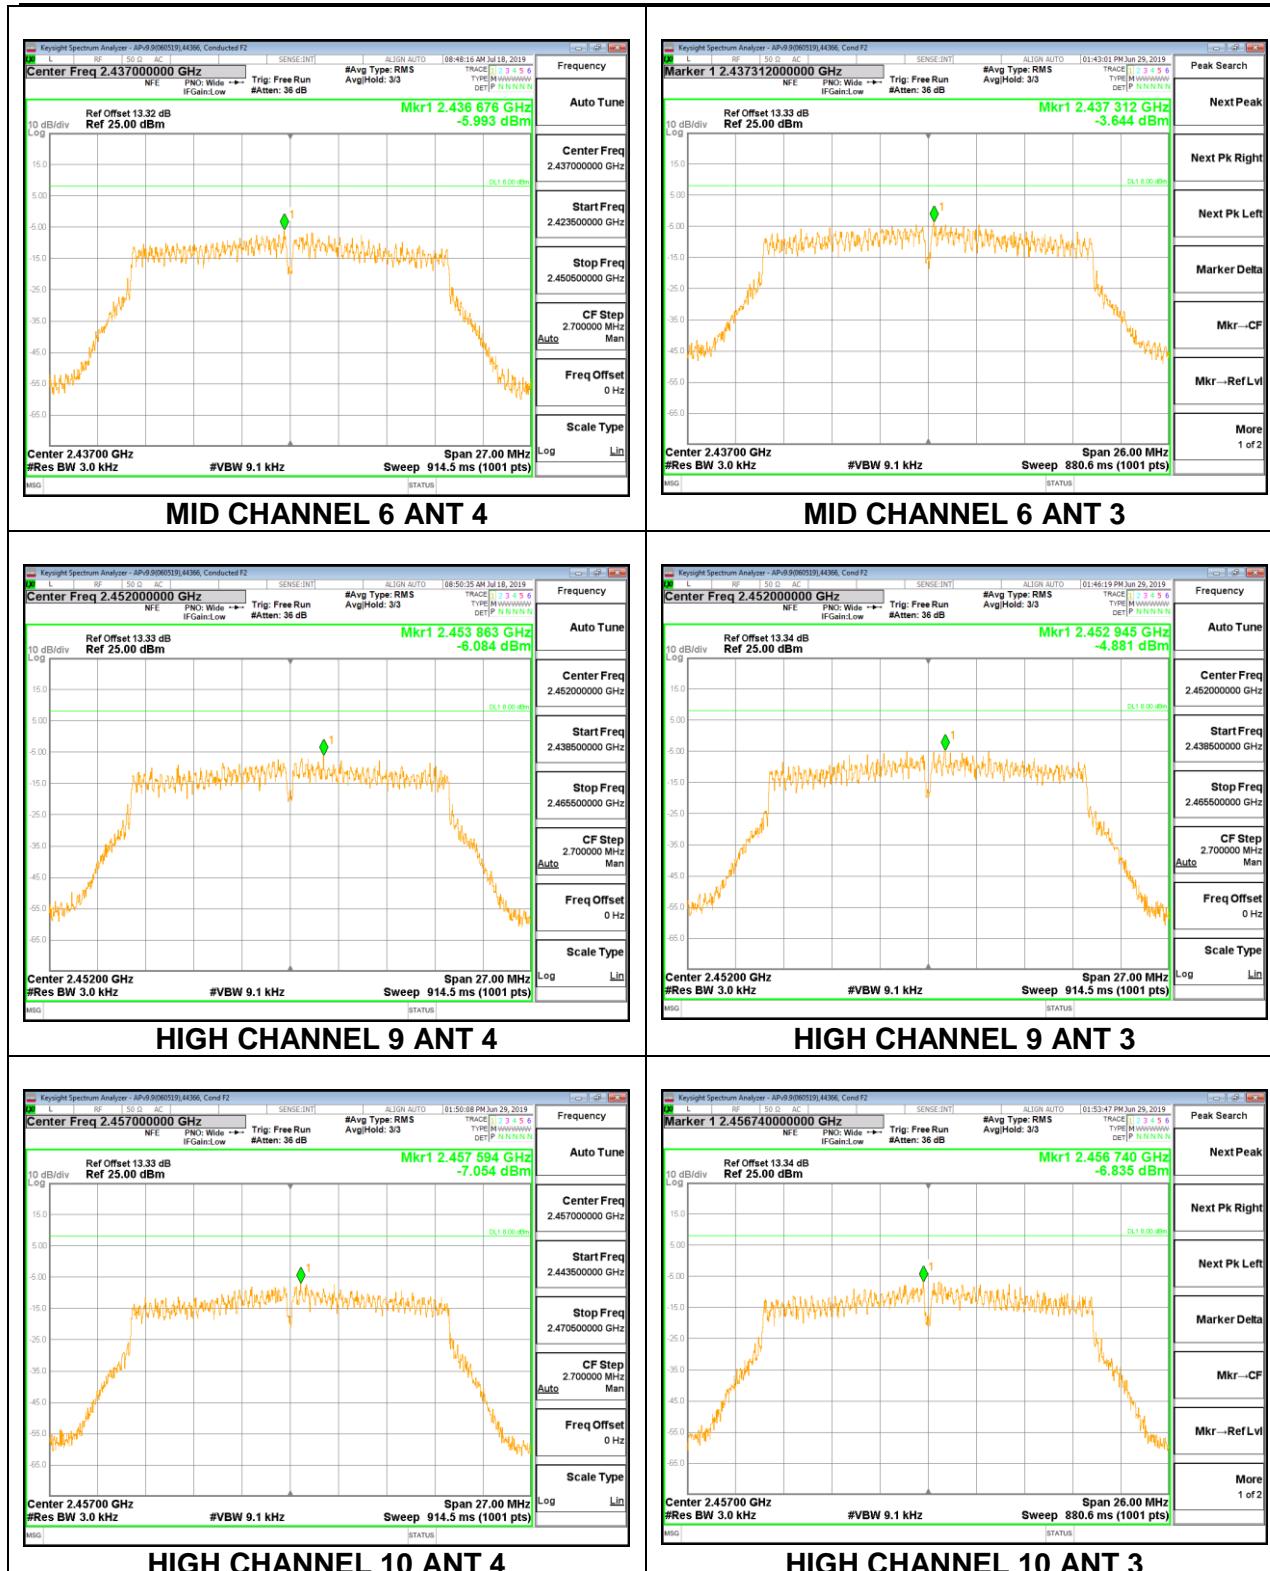


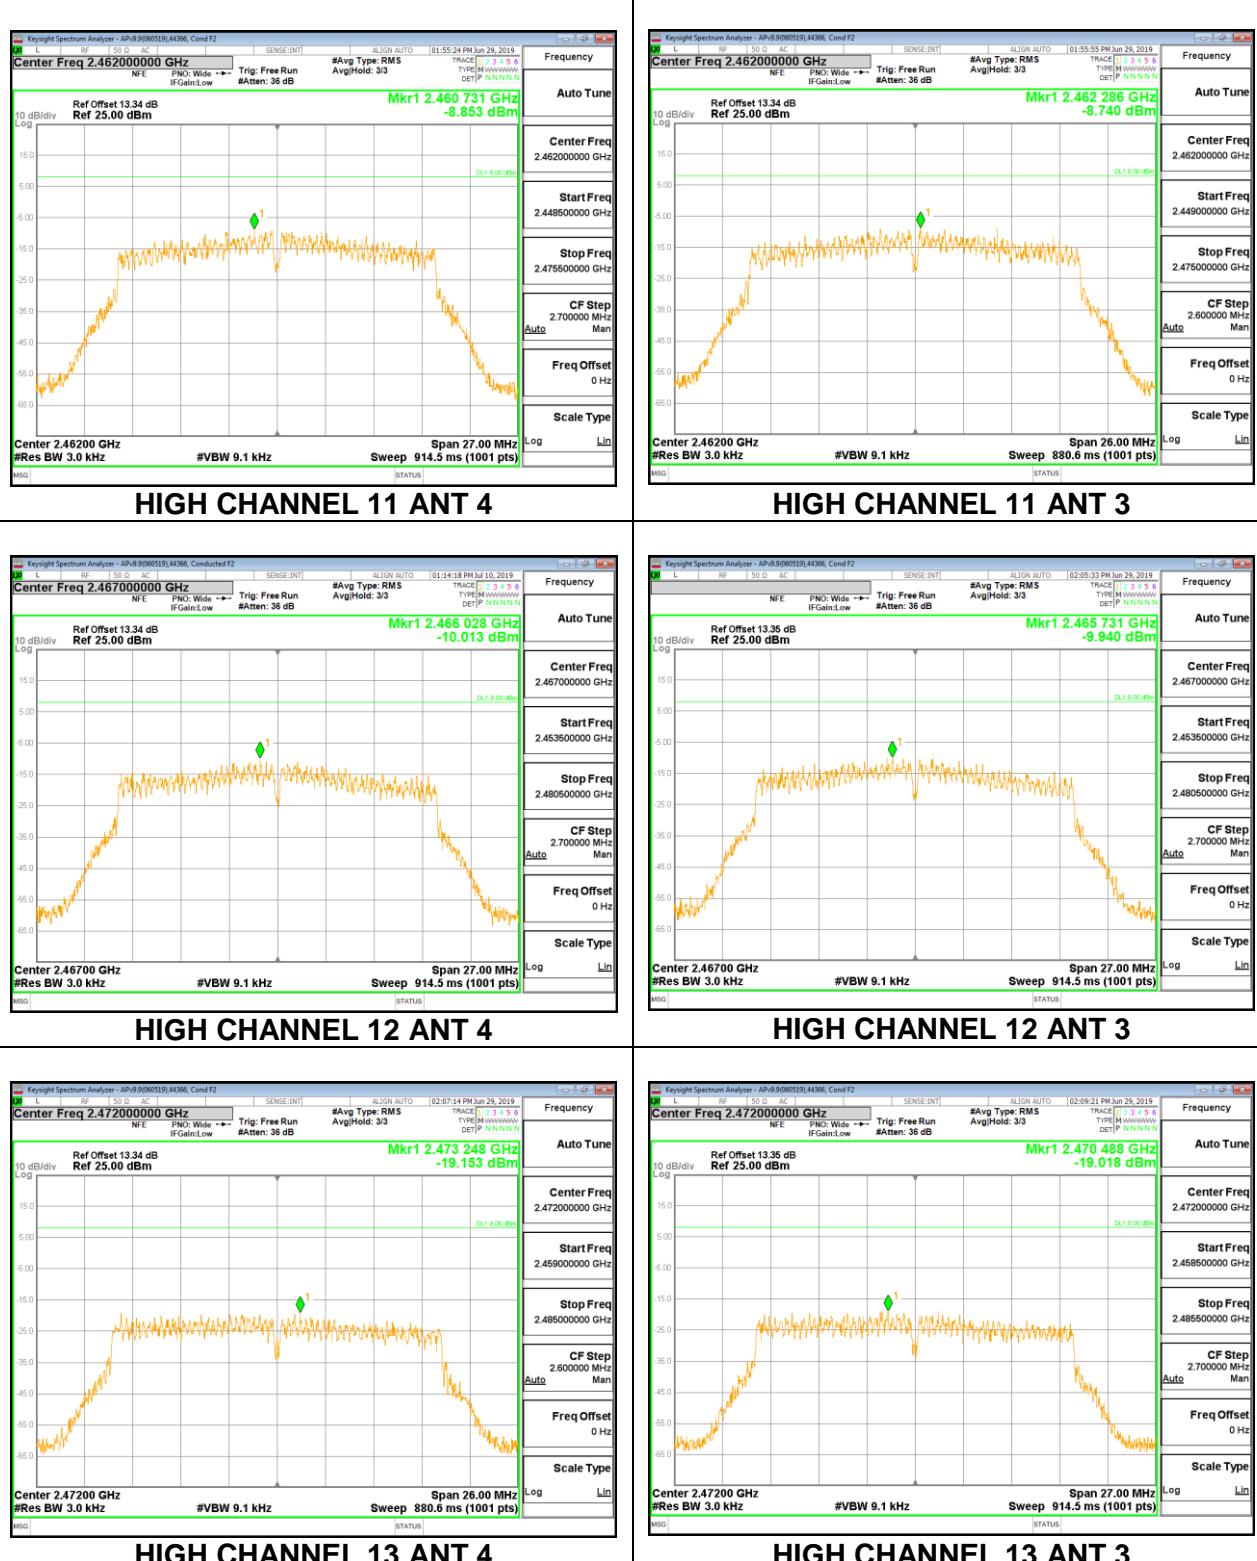


8.5.3. 802.11ax HE20 MODE

1TX Antenna 4 MODE: 26-Tones, RU Index 0

| Duty Cycle CF (dB) | | 0.00 | Included in Calculations of Corr'd PSD | | |
|--------------------|-----------------|-----------------------|--|------------------|-------------|
| PSD Results | | | | | |
| Channel | Frequency (MHz) | Ant 4 Meas (dBm/3kHz) | Total Corr'd PSD (dBm/3kHz) | Limit (dBm/3kHz) | Margin (dB) |
| Low 1 | 2412 | -2.474 | -2.47 | 8.0 | -10.5 |
| Low 2 | 2417 | -0.627 | -0.63 | 8.0 | -8.6 |
| Low 3 | 2422 | -0.067 | -0.07 | 8.0 | -8.1 |
| Mid 6 | 2437 | 0.268 | 0.27 | 8.0 | -7.7 |
| High 9 | 2452 | -0.091 | -0.09 | 8.0 | -8.1 |
| High 10 | 2457 | -0.646 | -0.65 | 8.0 | -8.6 |
| High 11 | 2462 | -2.336 | -2.34 | 8.0 | -10.3 |
| High 12 | 2467 | -3.938 | -3.94 | 8.0 | -11.9 |
| High 13 | 2472 | -18.435 | -18.44 | 8.0 | -26.4 |

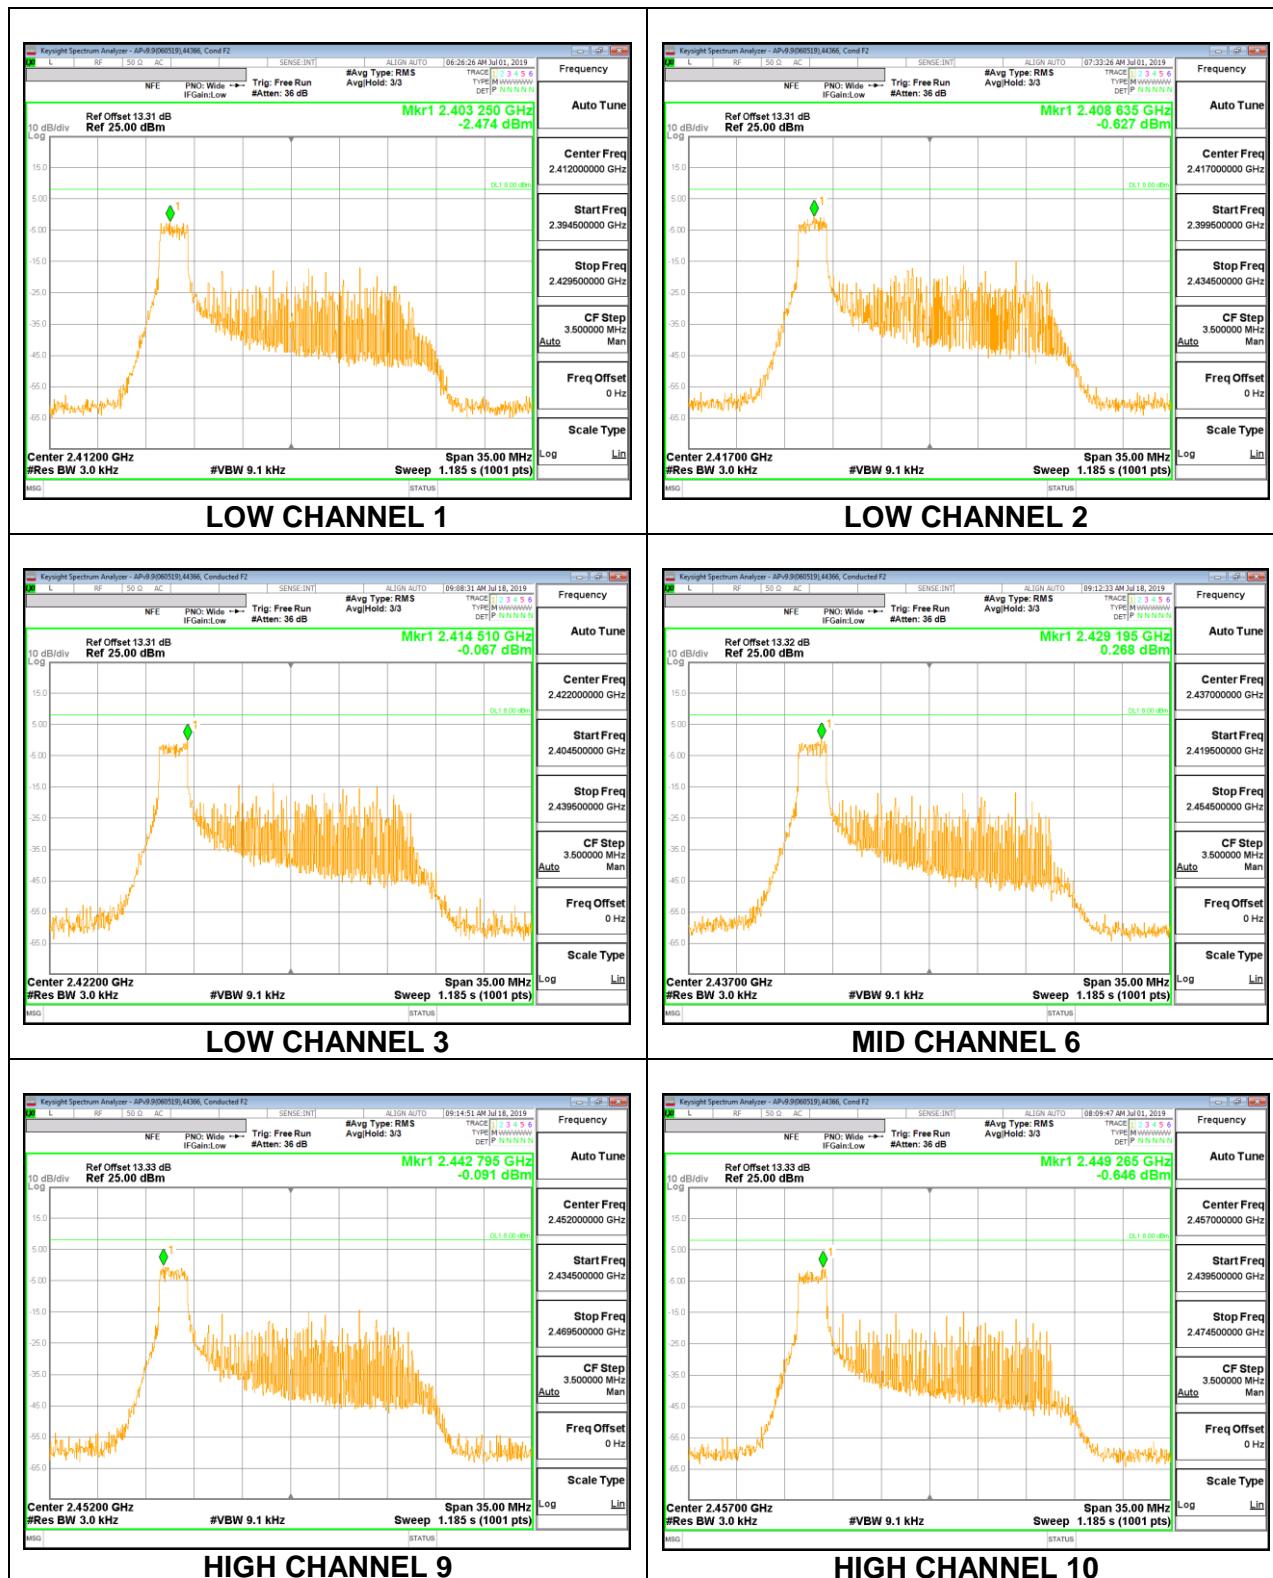

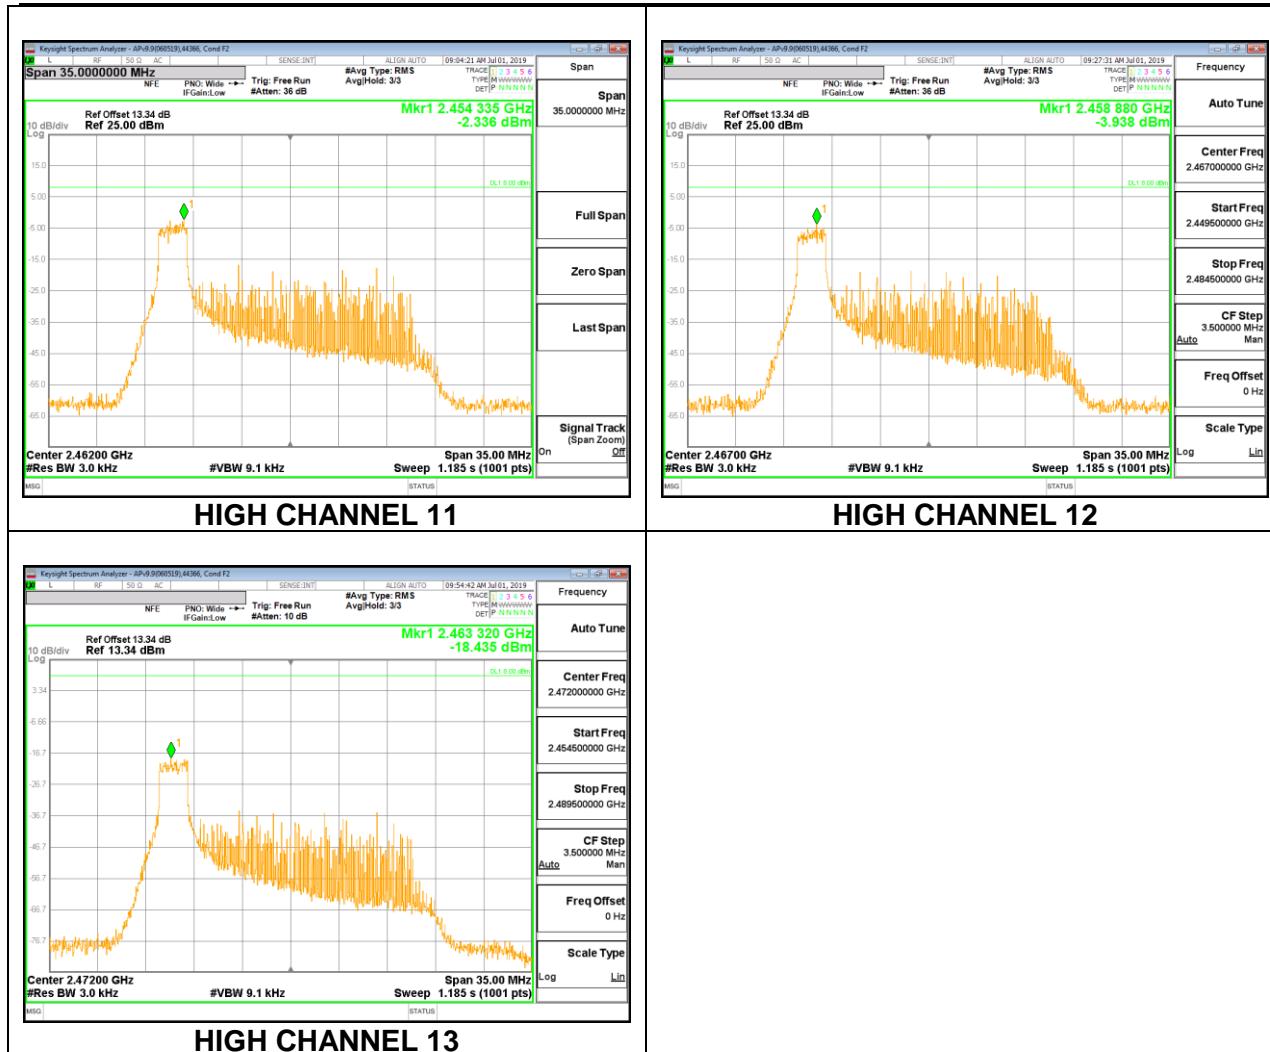



1TX Antenna 4 MODE: 26-Tones, RU Index 4

| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|
|--------------------|------|--|

PSD Results

| Channel | Frequency (MHz) | Ant 4 Meas (dBm/3kHz) | Total Corr'd PSD (dBm/3kHz) | Limit (dBm/3kHz) | Margin (dB) |
|---------|-----------------|-----------------------|-----------------------------|------------------|-------------|
| Low 1 | 2412 | -2.819 | -2.82 | 8.0 | -10.8 |
| Low 2 | 2417 | -1.068 | -1.07 | 8.0 | -9.1 |
| Low 3 | 2422 | -0.406 | -0.41 | 8.0 | -8.4 |
| Mid 6 | 2437 | -0.065 | -0.07 | 8.0 | -8.1 |
| High 9 | 2452 | -0.543 | -0.54 | 8.0 | -8.5 |
| High 10 | 2457 | -1.001 | -1.00 | 8.0 | -9.0 |
| High 11 | 2462 | -2.711 | -2.71 | 8.0 | -10.7 |
| High 12 | 2467 | -4.546 | -4.55 | 8.0 | -12.5 |
| High 13 | 2472 | -18.099 | -18.10 | 8.0 | -26.1 |

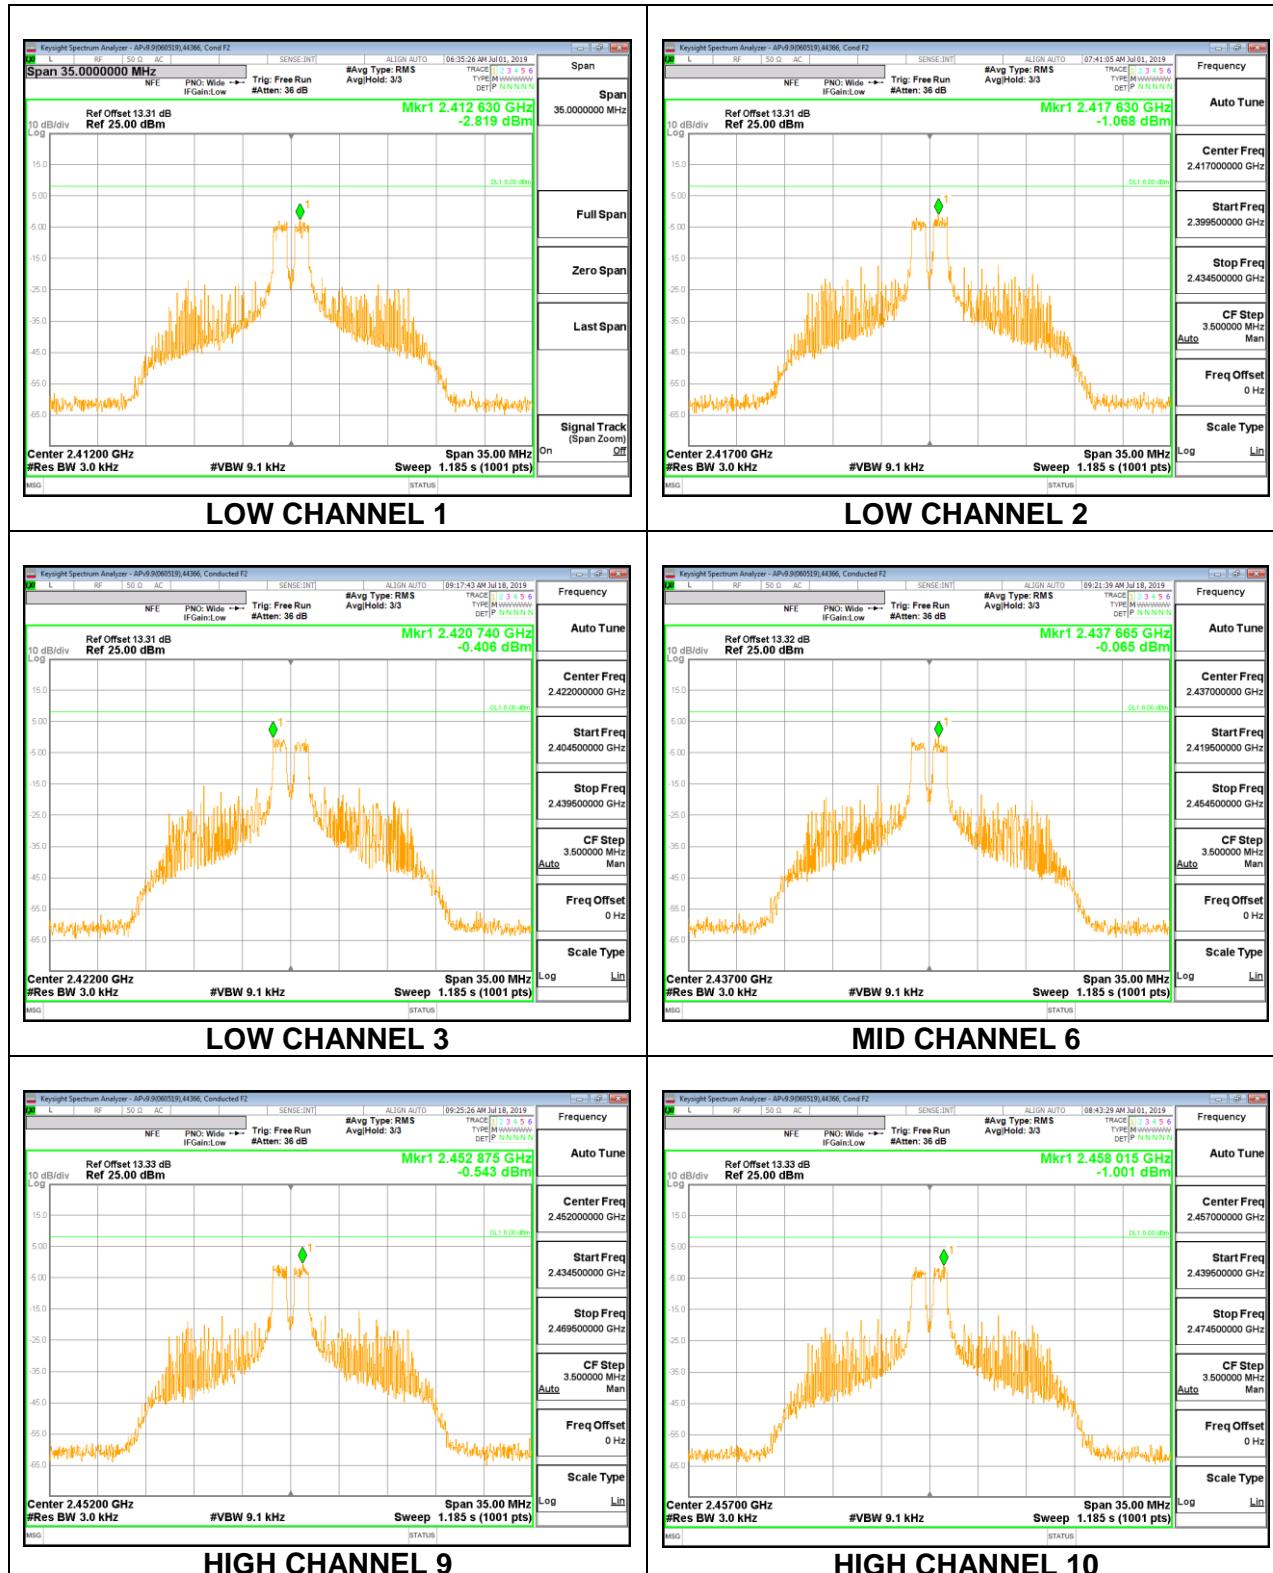

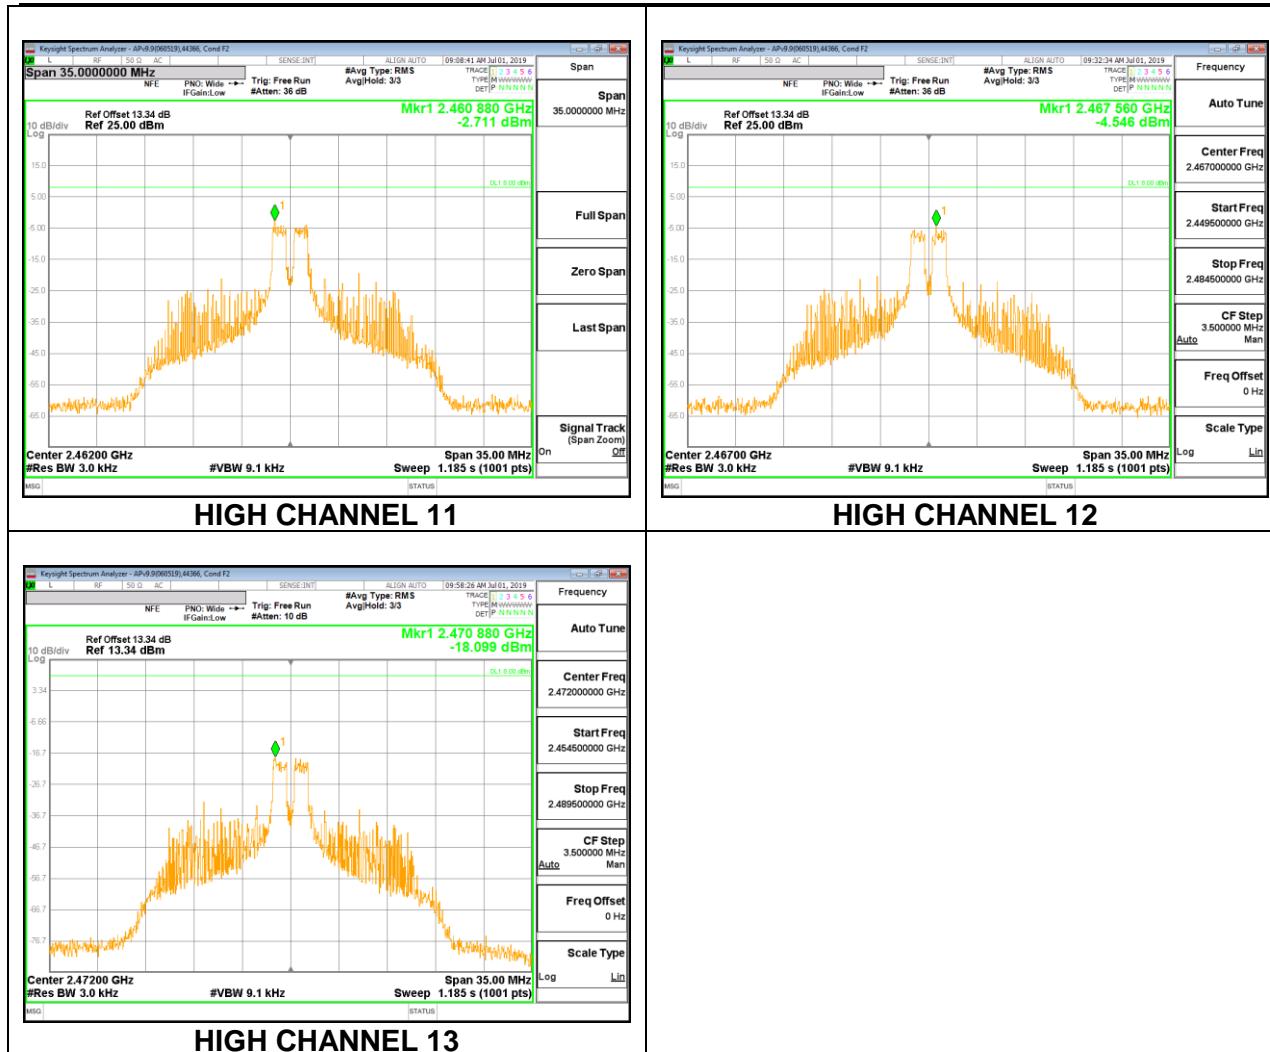



1TX Antenna 4 MODE: 26-Tones, RU Index 8

| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|
|--------------------|------|--|

PSD Results

| Channel | Frequency (MHz) | Ant 4 Meas (dBm/3kHz) | Total Corr'd PSD (dBm/3kHz) | Limit (dBm/3kHz) | Margin (dB) |
|---------|-----------------|-----------------------|-----------------------------|------------------|-------------|
| Low 1 | 2412 | -2.469 | -2.47 | 8.0 | -10.5 |
| Low 2 | 2417 | -0.586 | -0.59 | 8.0 | -8.6 |
| Low 3 | 2422 | -0.150 | -0.15 | 8.0 | -8.2 |
| Mid 6 | 2437 | 0.169 | 0.17 | 8.0 | -7.8 |
| High 9 | 2452 | 0.049 | 0.05 | 8.0 | -8.0 |
| High 10 | 2457 | -0.659 | -0.66 | 8.0 | -8.7 |
| High 11 | 2462 | -2.515 | -2.52 | 8.0 | -10.5 |
| High 12 | 2467 | -4.077 | -4.08 | 8.0 | -12.1 |
| High 13 | 2472 | -17.719 | -17.72 | 8.0 | -25.7 |

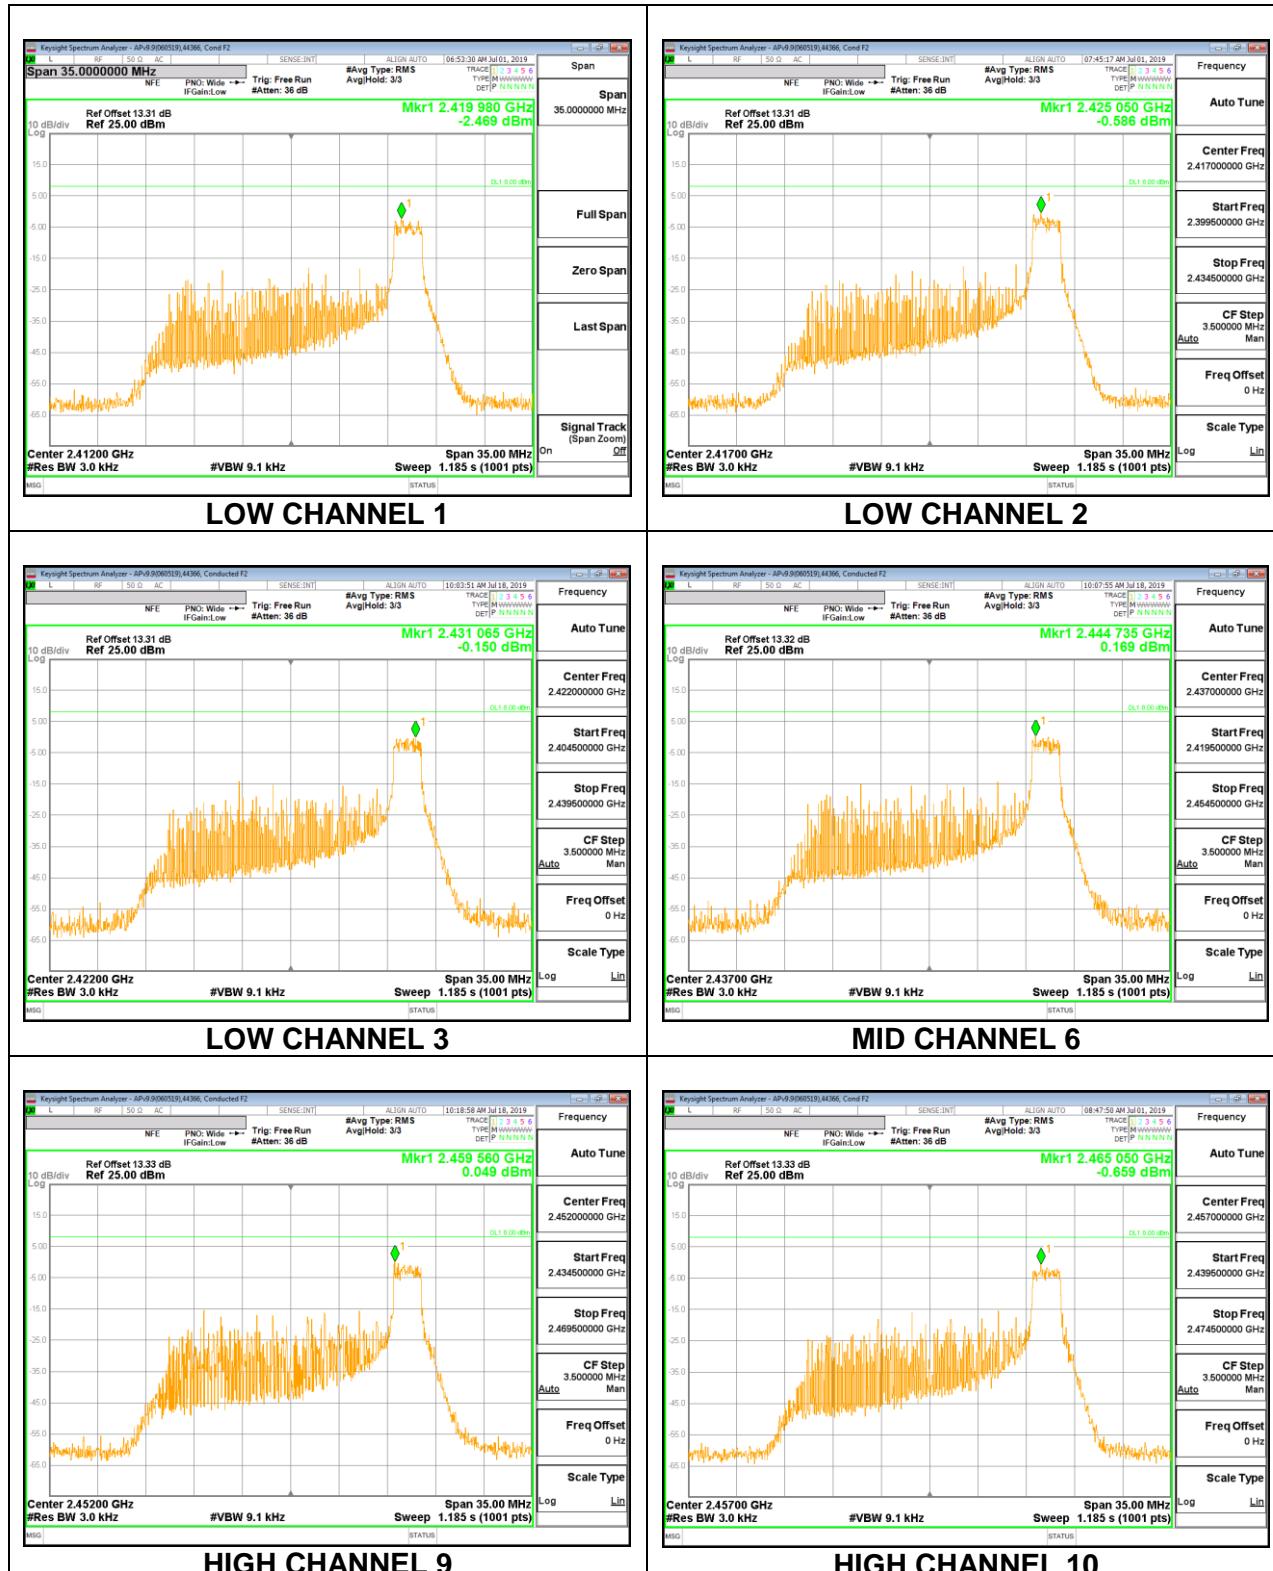

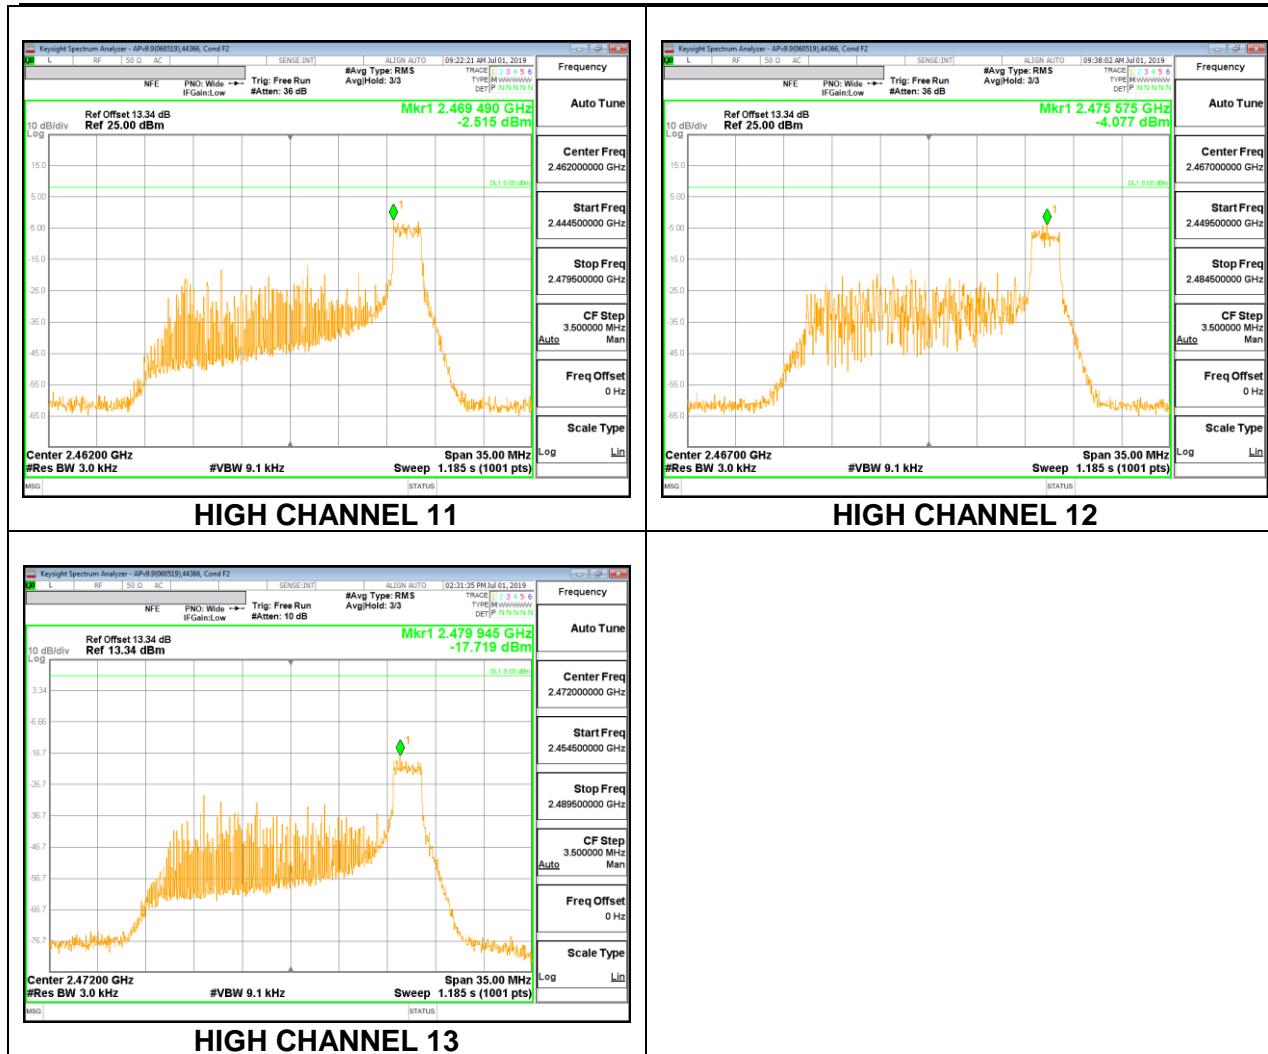




1TX Antenna 4 MODE: 242-Tones, RU Index 61

| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|
|--------------------|------|--|

PSD Results

| Channel | Frequency (MHz) | Ant 4 Meas (dBm/3kHz) | Total Corr'd PSD (dBm/3kHz) | Limit (dBm/3kHz) | Margin (dB) |
|---------|-----------------|-----------------------|-----------------------------|------------------|-------------|
| Low 1 | 2412 | -9.974 | -9.97 | 8.0 | -18.0 |
| Low 2 | 2417 | -7.888 | -7.89 | 8.0 | -15.9 |
| Low 3 | 2422 | -7.032 | -7.03 | 8.0 | -15.0 |
| Mid 6 | 2437 | -6.880 | -6.88 | 8.0 | -14.9 |
| High 9 | 2452 | -7.090 | -7.09 | 8.0 | -15.1 |
| High 10 | 2457 | -7.978 | -7.98 | 8.0 | -16.0 |
| High 11 | 2462 | -9.800 | -9.80 | 8.0 | -17.8 |
| High 12 | 2467 | -11.659 | -11.66 | 8.0 | -19.7 |
| High 13 | 2472 | -20.229 | -20.23 | 8.0 | -28.2 |

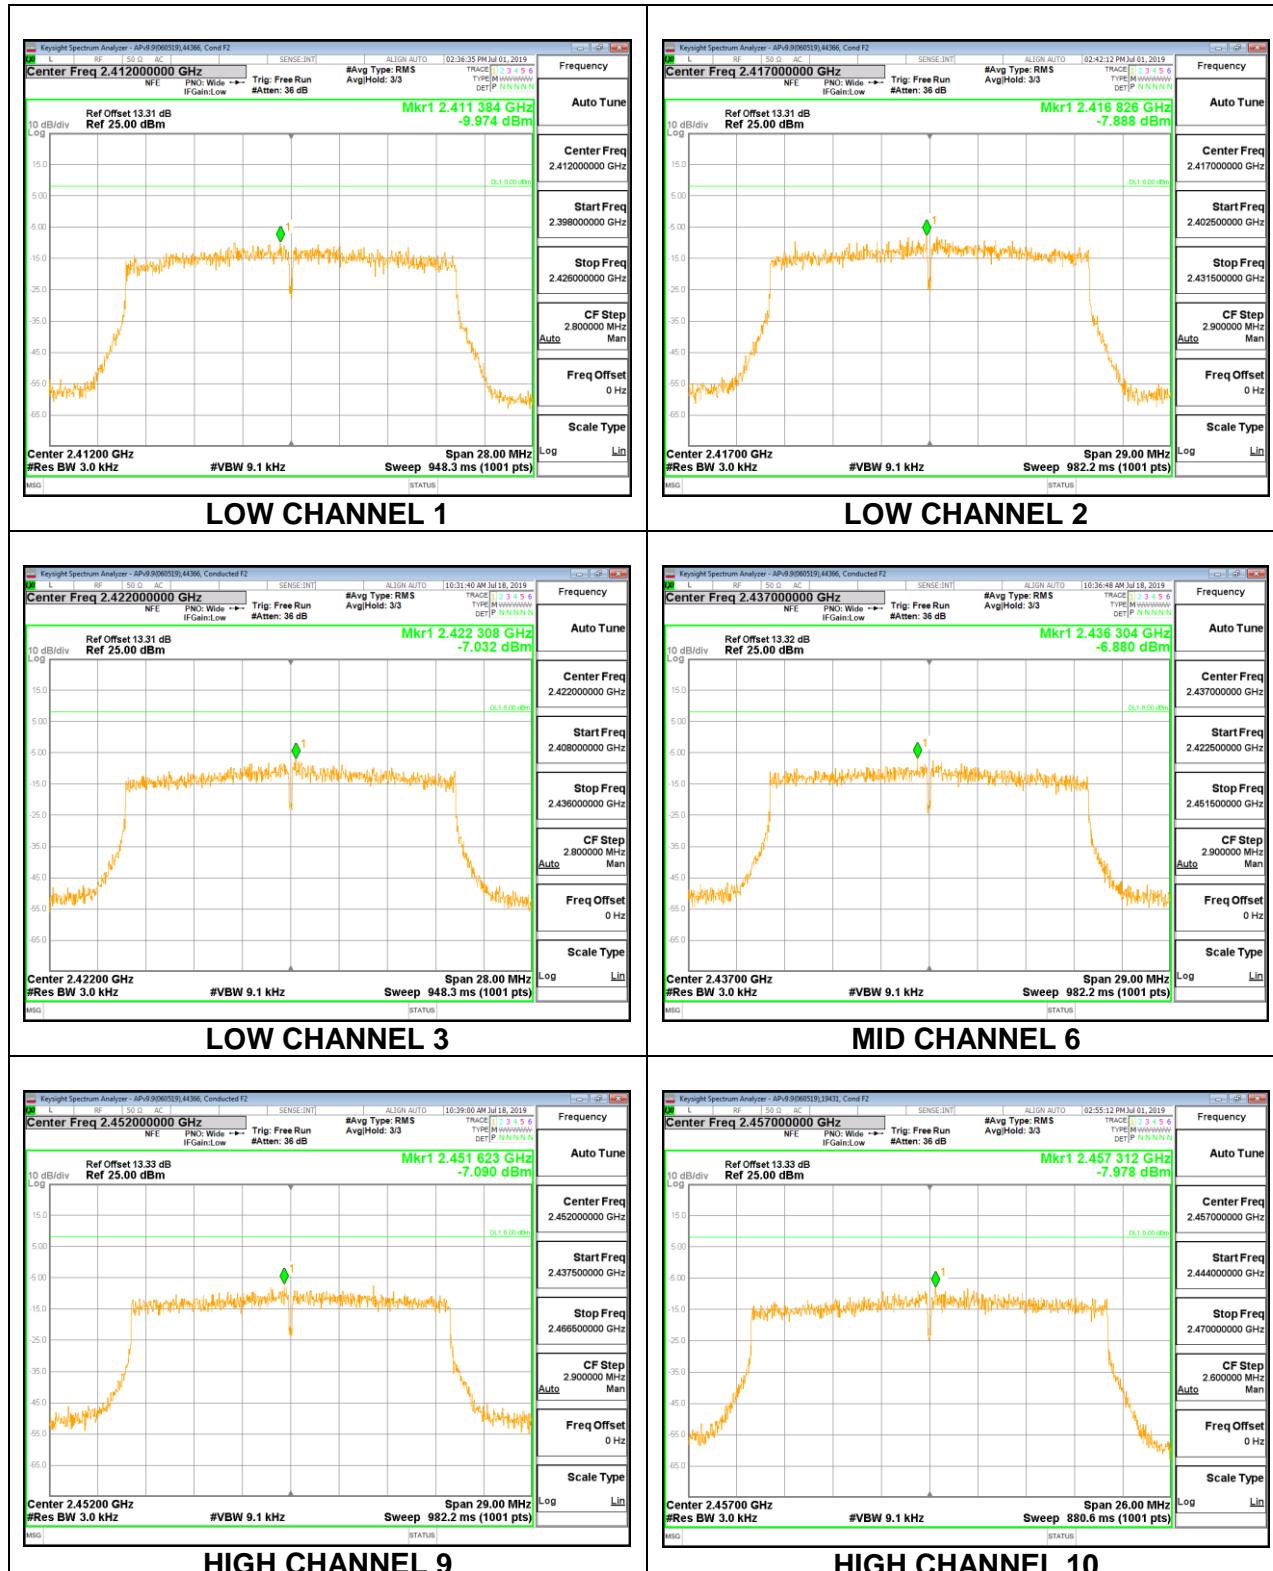

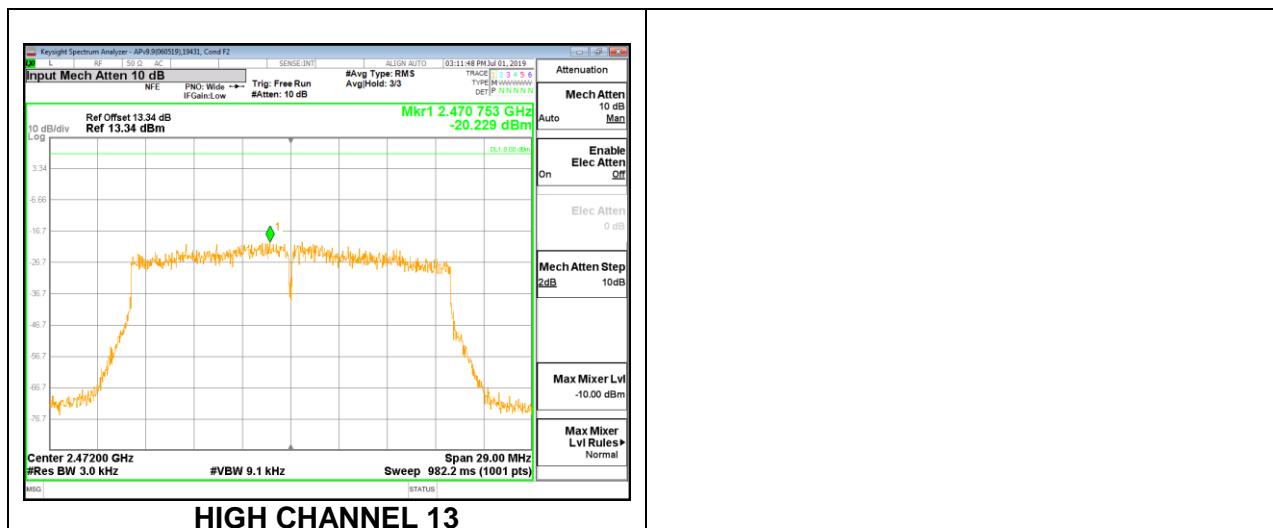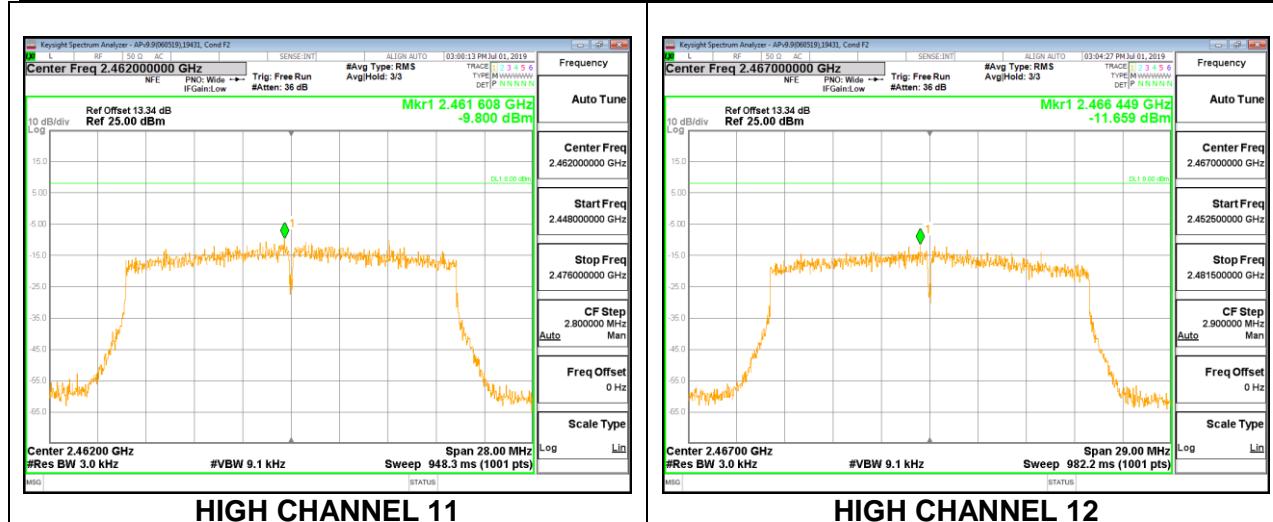



1TX Antenna 3 MODE: 26-Tones, RU Index 0

| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|
|--------------------|------|--|

PSD Results

| Channel | Frequency (MHz) | ANT 3 Meas (dBm/ 3kHz) | Total Corr'd PSD (dBm/ 3kHz) | Limit (dBm/ 3kHz) | Margin (dB) |
|---------|--------------------|---------------------------------|--|-------------------------|----------------|
| Low 1 | 2412 | -2.356 | -2.36 | 8.0 | -10.4 |
| Low 2 | 2417 | -0.689 | -0.69 | 8.0 | -8.7 |
| Low 3 | 2422 | 2.743 | 2.74 | 11.0 | -8.3 |
| Mid 6 | 2437 | 2.985 | 2.99 | 12.0 | -9.0 |
| High 9 | 2452 | 2.837 | 2.84 | 15.0 | -12.2 |
| High 10 | 2457 | -0.656 | -0.66 | 8.0 | -8.7 |
| High 11 | 2462 | -2.511 | -2.51 | 8.0 | -10.5 |
| High 12 | 2467 | -4.044 | -4.04 | 8.0 | -12.0 |
| High 13 | 2472 | -18.302 | -18.30 | 8.0 | -26.3 |

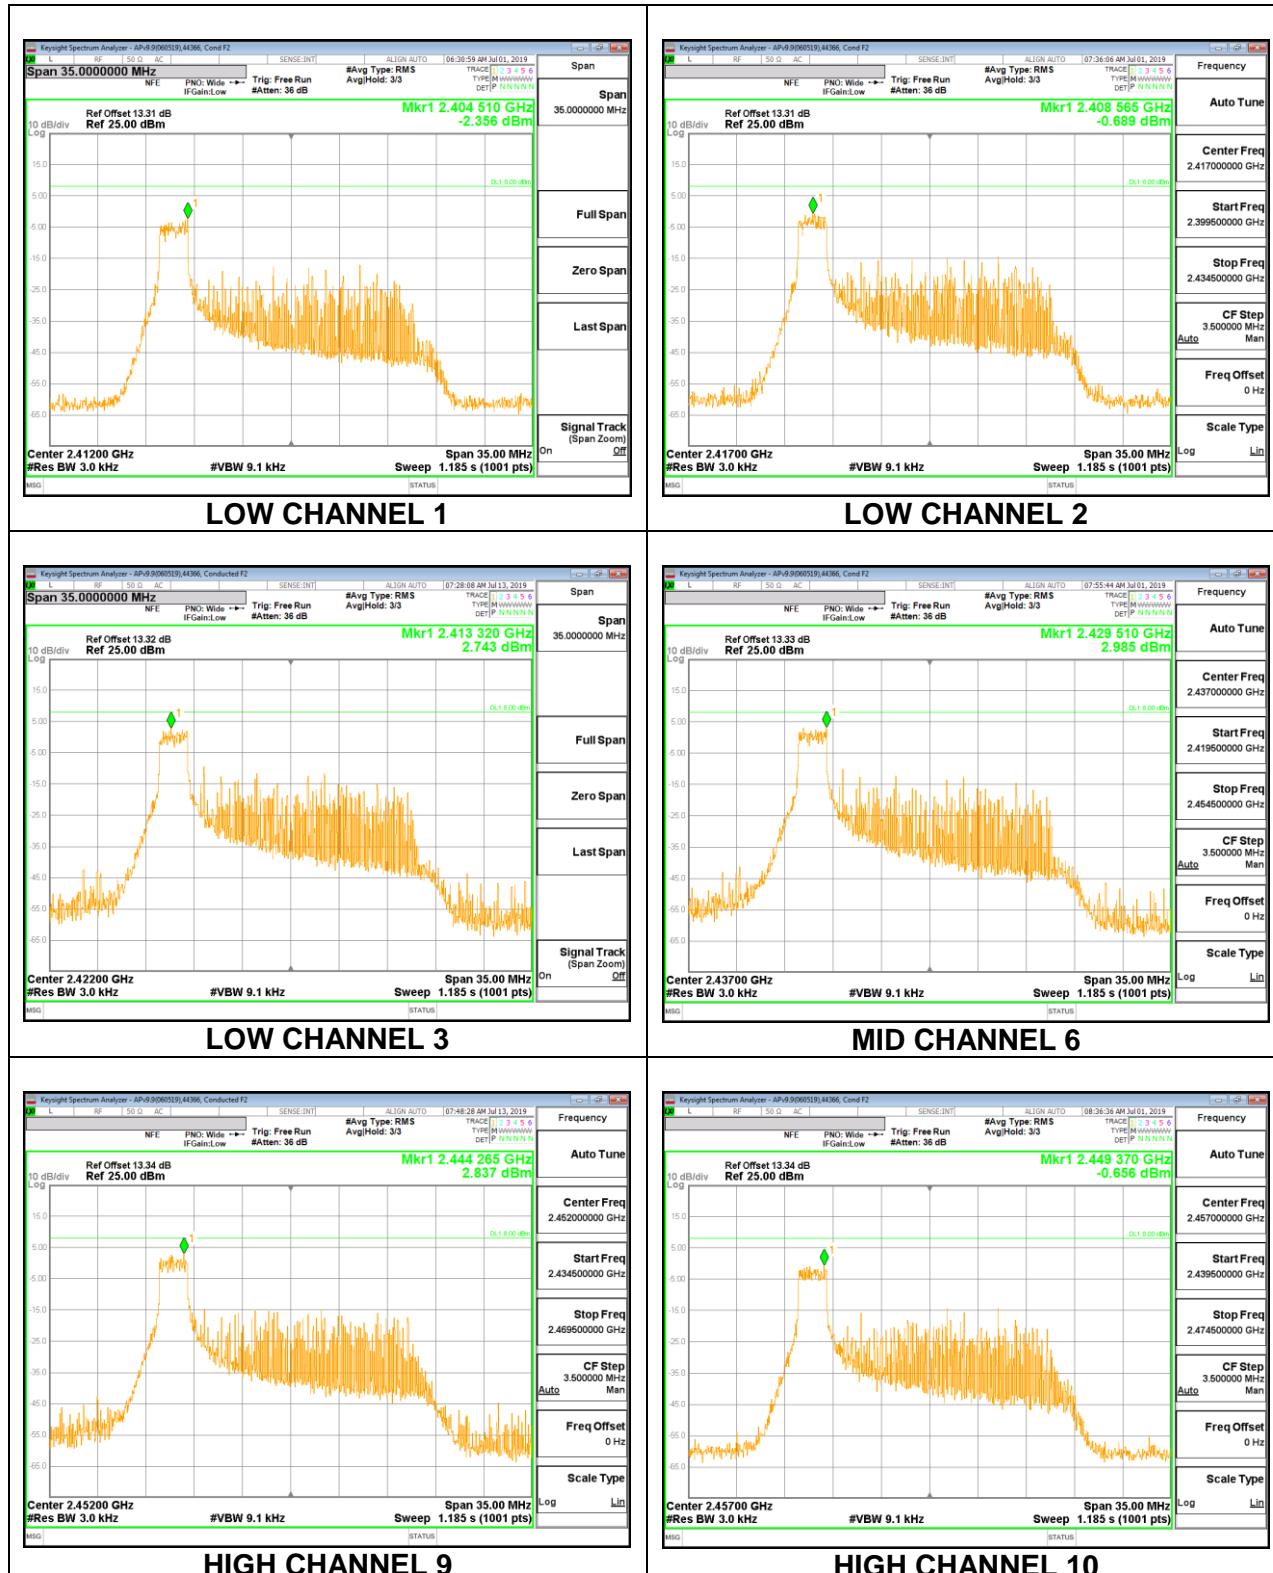

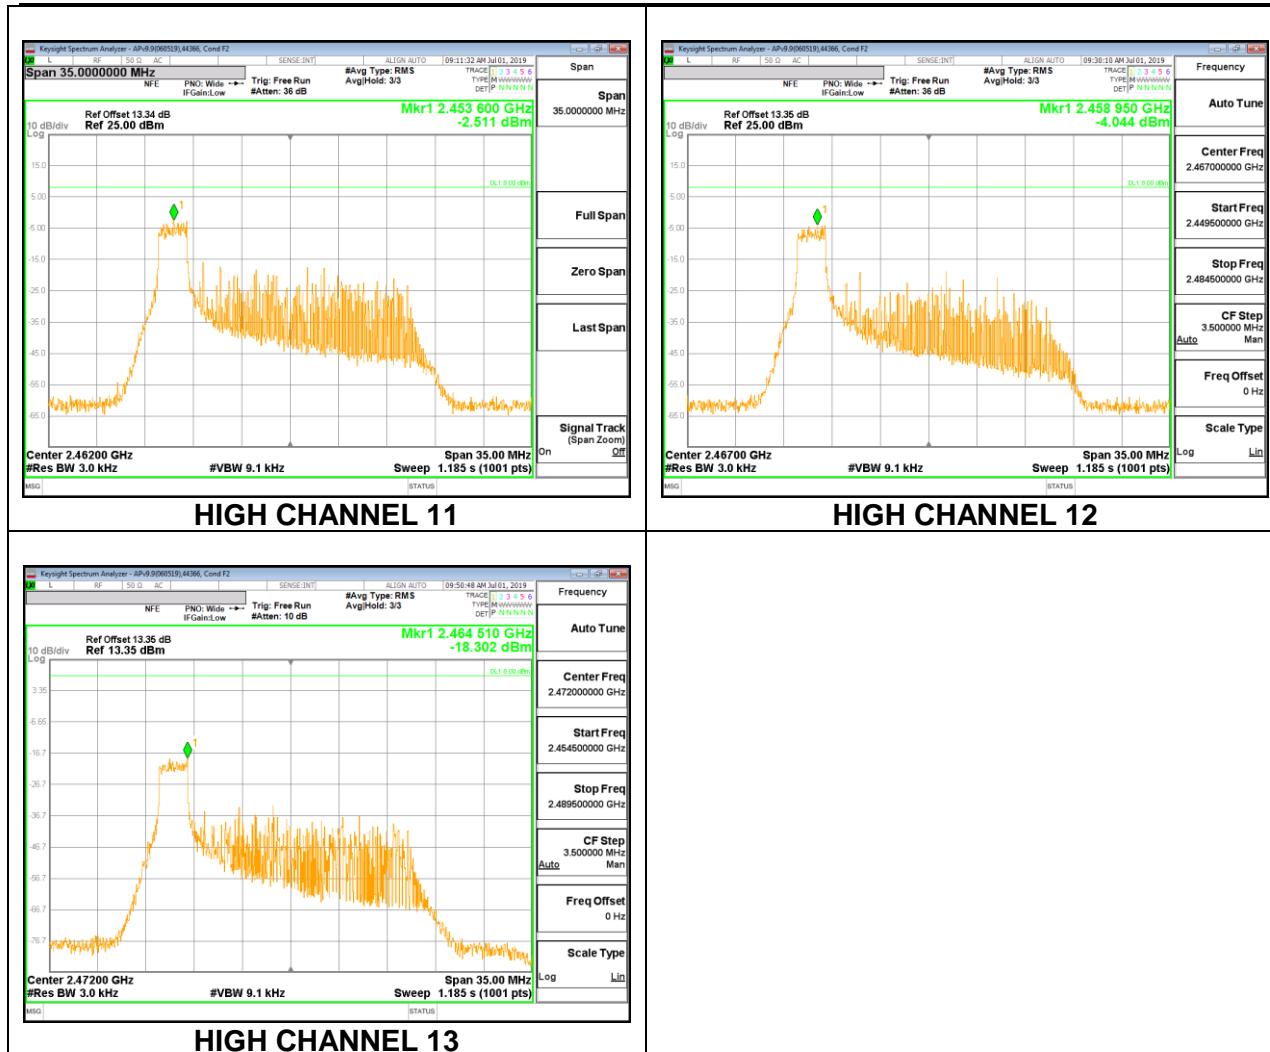



1TX Antenna 3 MODE: 26-Tones, RU Index 4

| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|
|--------------------|------|--|

PSD Results

| Channel | Frequency (MHz) | ANT 3 Meas (dBm/ 3kHz) | Total Corr'd PSD (dBm/ 3kHz) | Limit (dBm/ 3kHz) | Margin (dB) |
|---------|--------------------|---------------------------------|--|-------------------------|----------------|
| Low 1 | 2412 | -2.794 | -2.79 | 8.0 | -10.8 |
| Low 2 | 2417 | -0.930 | -0.93 | 8.0 | -8.9 |
| Low 3 | 2422 | 2.985 | 2.99 | 11.0 | -8.0 |
| Mid 6 | 2437 | 2.625 | 2.63 | 12.0 | -9.4 |
| High 9 | 2452 | 2.652 | 2.65 | 15.0 | -12.3 |
| High 10 | 2457 | -1.149 | -1.15 | 8.0 | -9.1 |
| High 11 | 2462 | -2.806 | -2.81 | 8.0 | -10.8 |
| High 12 | 2467 | -4.531 | -4.53 | 8.0 | -12.5 |
| High 13 | 2472 | -17.910 | -17.91 | 8.0 | -25.9 |

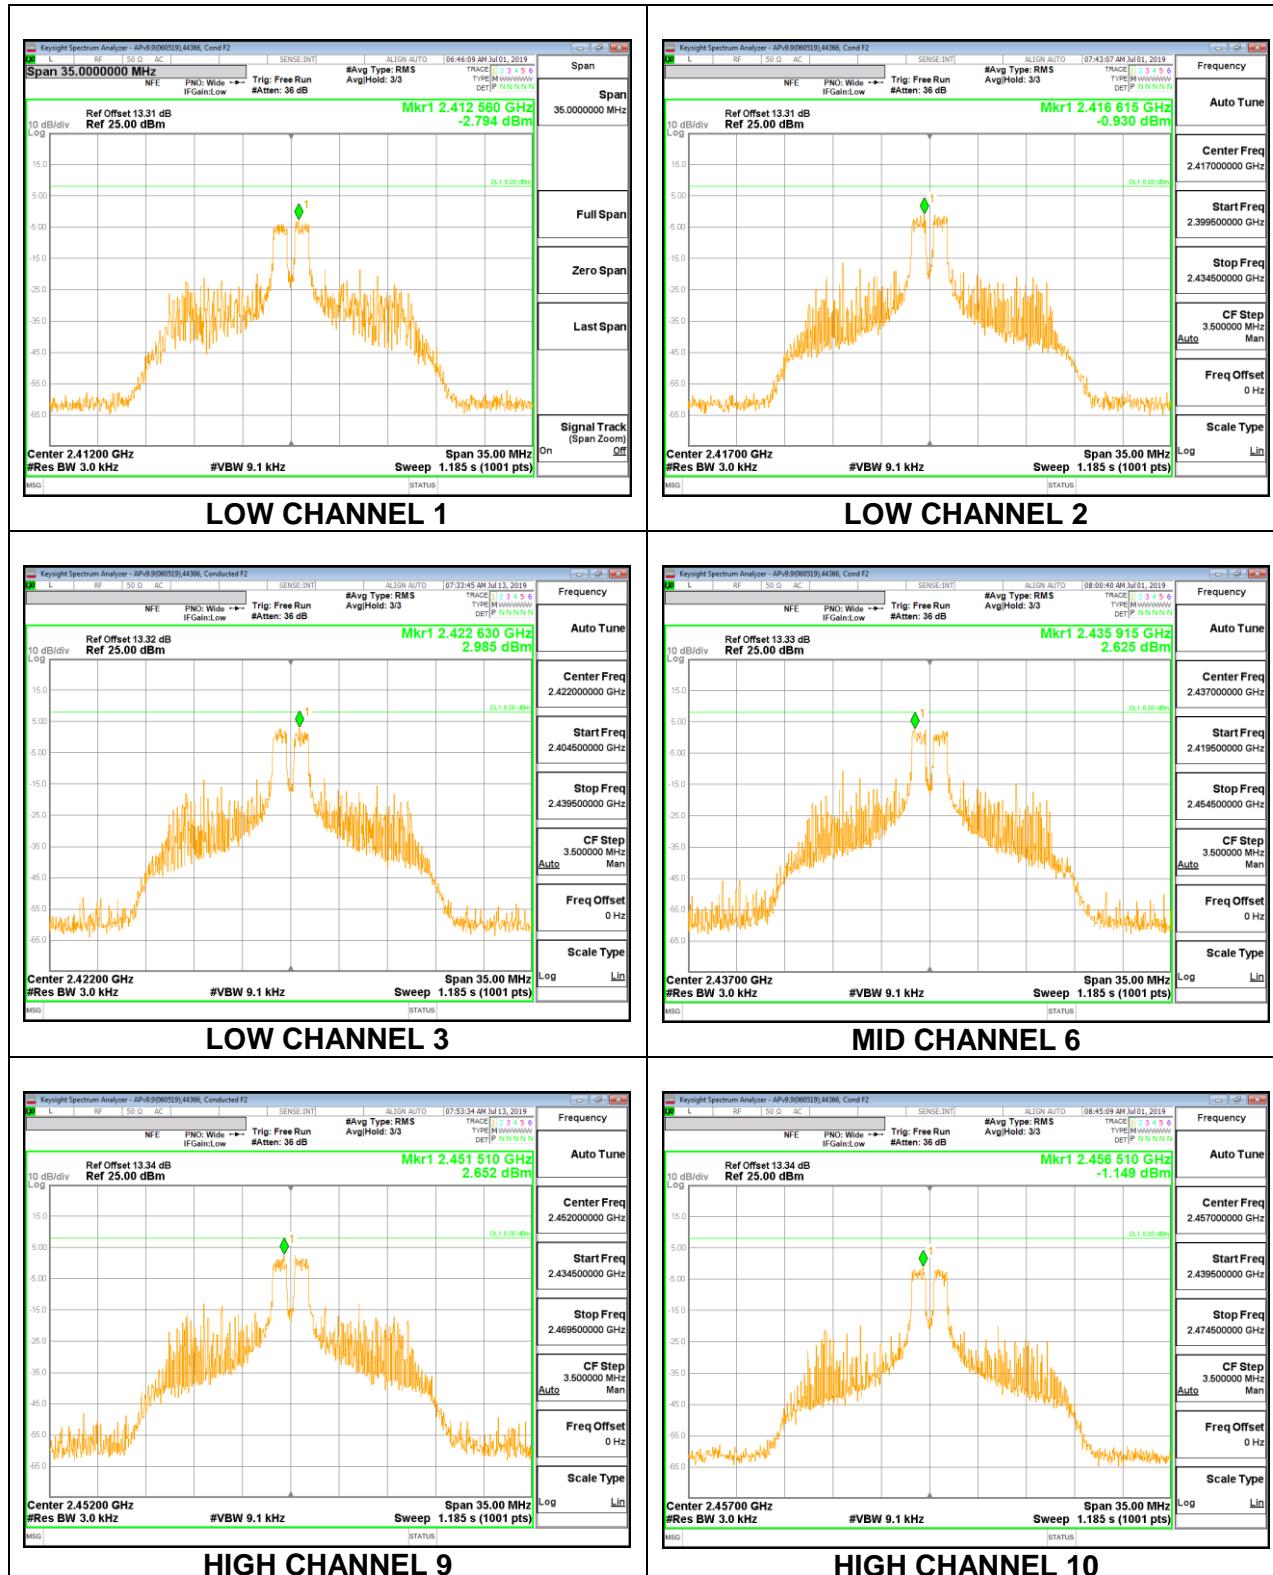

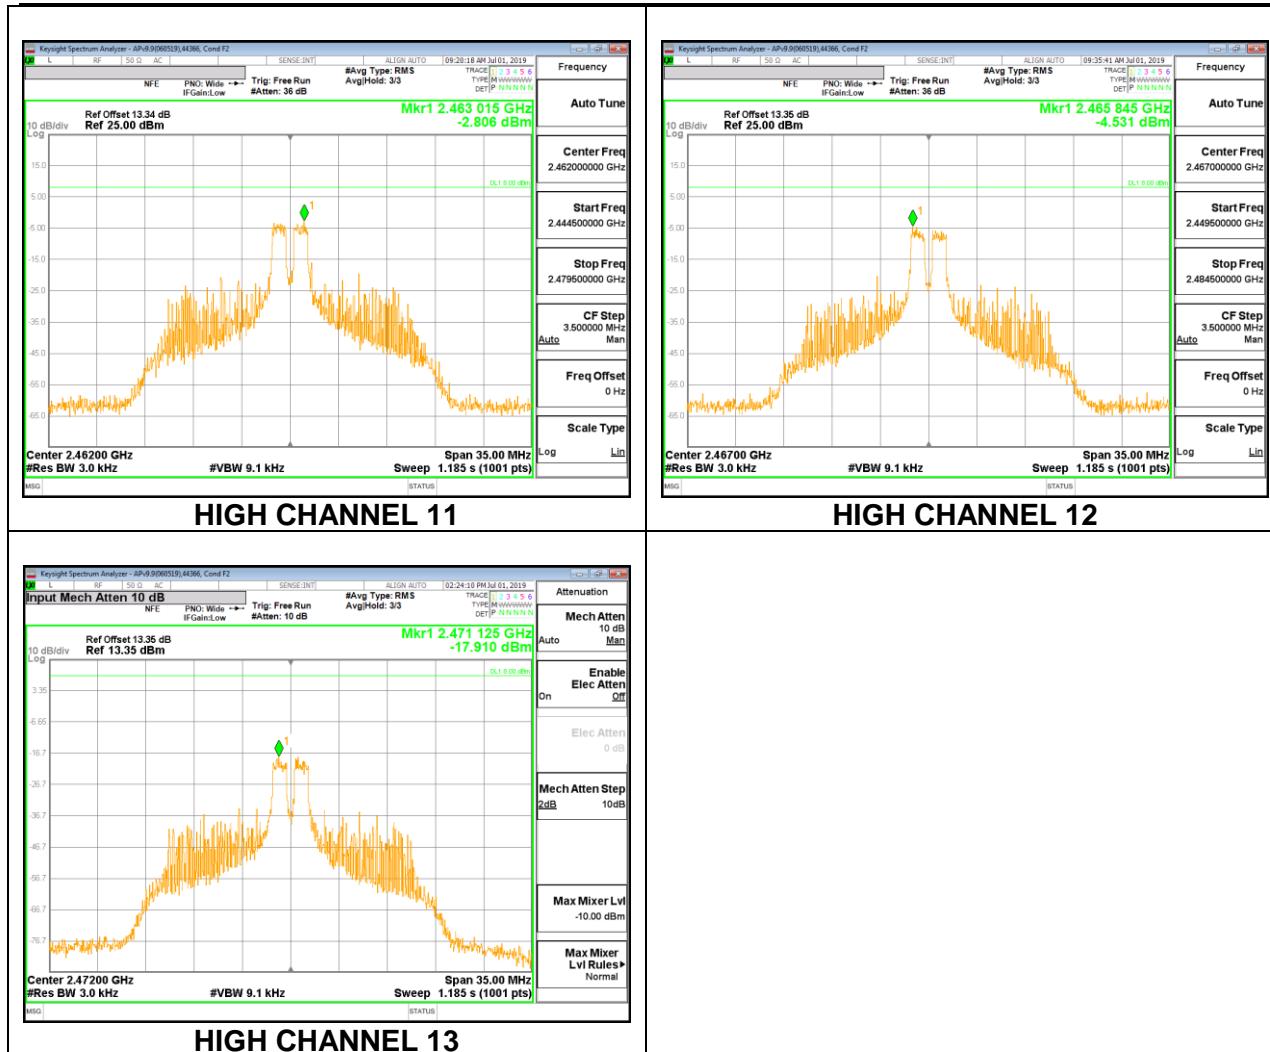

1TX Antenna 3 MODE: 26-Tones, RU Index 8

| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|
|--------------------|------|--|

PSD Results

| Channel | Frequency (MHz) | ANT 3 Meas (dBm/3kHz) | Total Corr'd PSD (dBm/3kHz) | Limit (dBm/3kHz) | Margin (dB) |
|---------|-----------------|-----------------------|-----------------------------|------------------|-------------|
| Low 1 | 2412 | -2.541 | -2.54 | 8.0 | -10.5 |
| Low 2 | 2417 | -0.638 | -0.64 | 8.0 | -8.6 |
| Low 3 | 2422 | 2.751 | 2.75 | 11.0 | -8.2 |
| Mid 6 | 2437 | 3.097 | 3.10 | 12.0 | -8.9 |
| High 9 | 2452 | 2.754 | 2.75 | 15.0 | -12.2 |
| High 10 | 2457 | -0.685 | -0.69 | 8.0 | -8.7 |
| High 11 | 2462 | -2.481 | -2.48 | 8.0 | -10.5 |
| High 12 | 2467 | -3.986 | -3.99 | 8.0 | -12.0 |
| High 13 | 2472 | -17.957 | -17.96 | 8.0 | -26.0 |