

8.3 HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to $VBW \geq RBW$. The sweep time is coupled.

RESULTS


8.3.1 HIGH POWER BASIC DATA RATE GFSK MODULATION

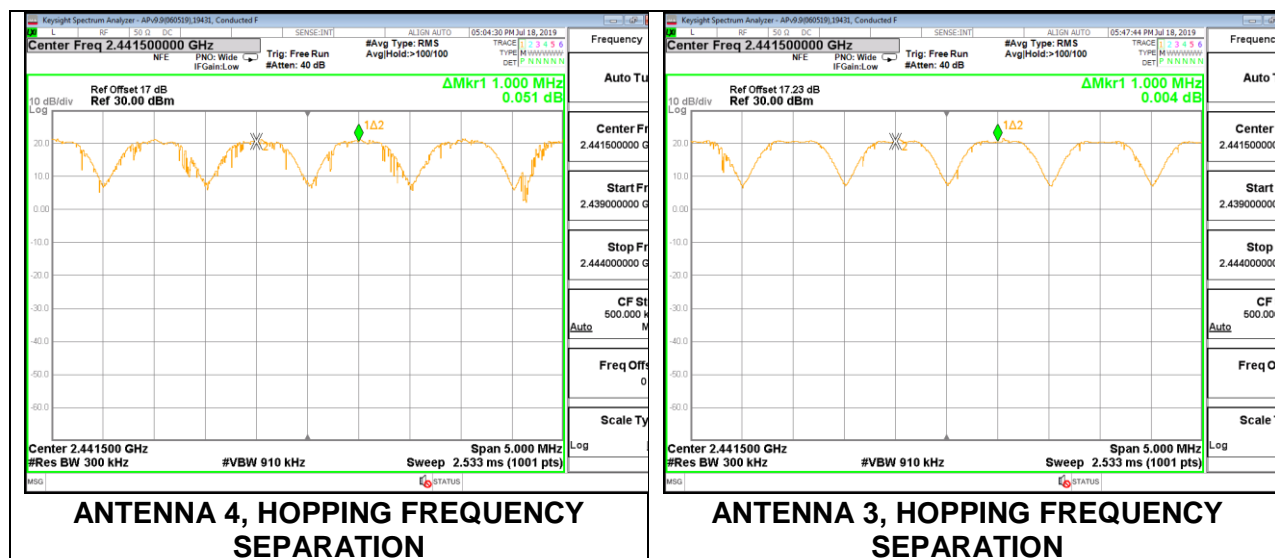


8.3.2 HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

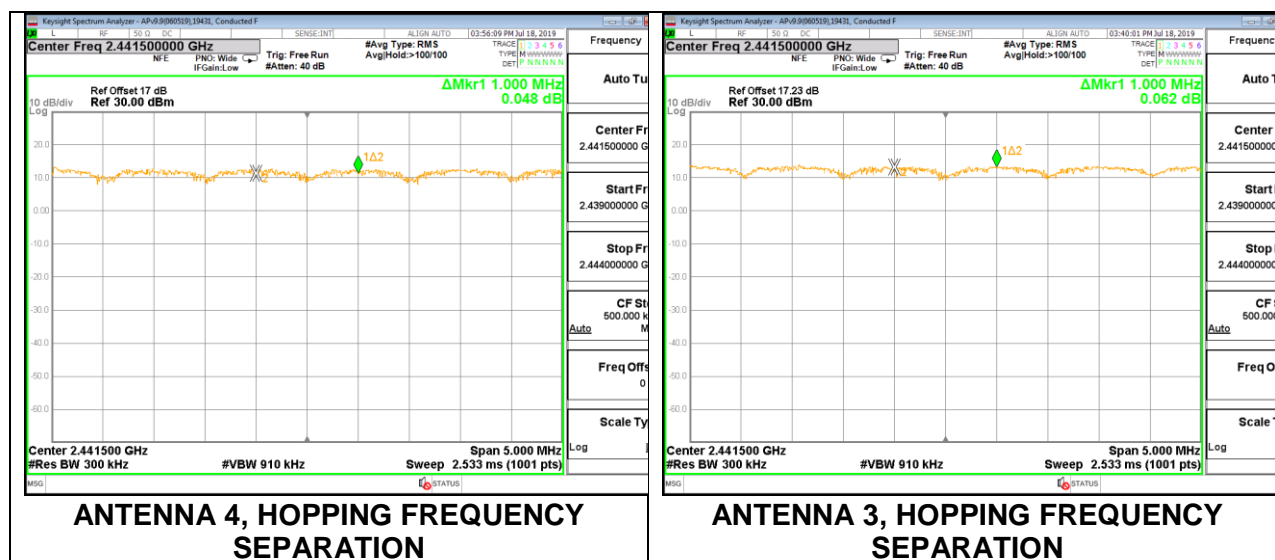

8.3.3 LOW POWER BASIC DATA RATE GFSK MODULATION

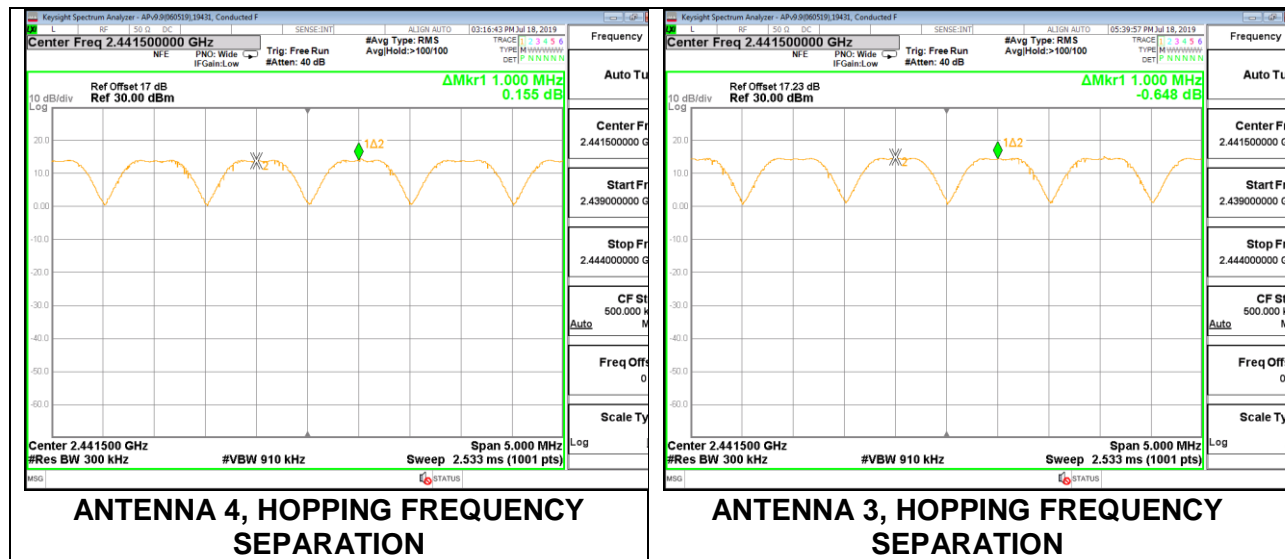

8.3.4 LOW POWER ENHANCED DATA RATE 8PSK MODULATION

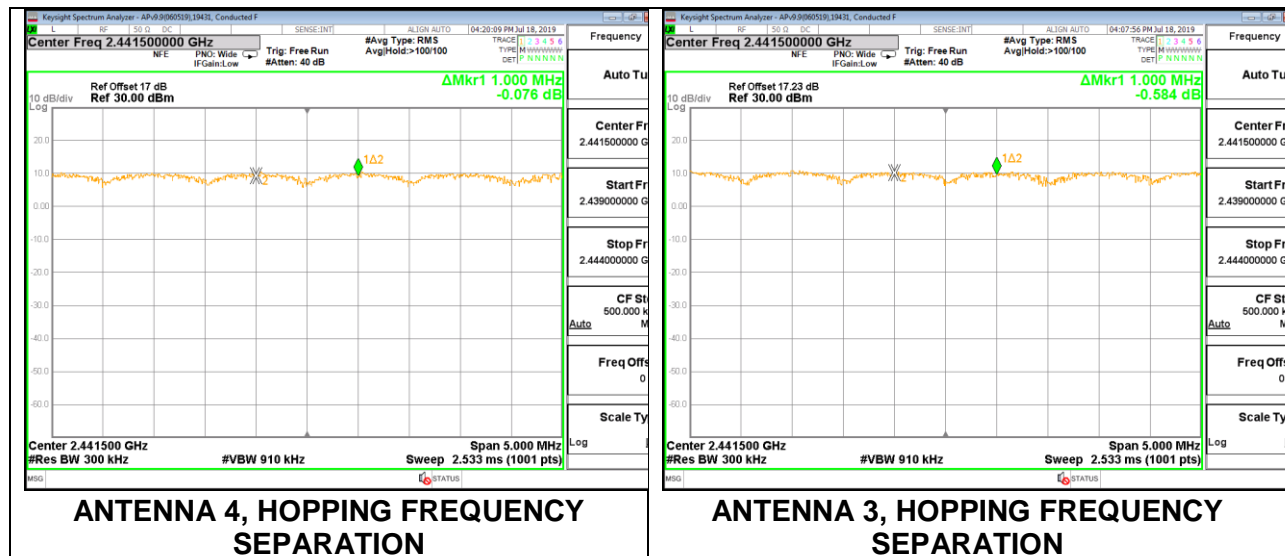

8.4 NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: All Channels Observed

8.4.1 HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

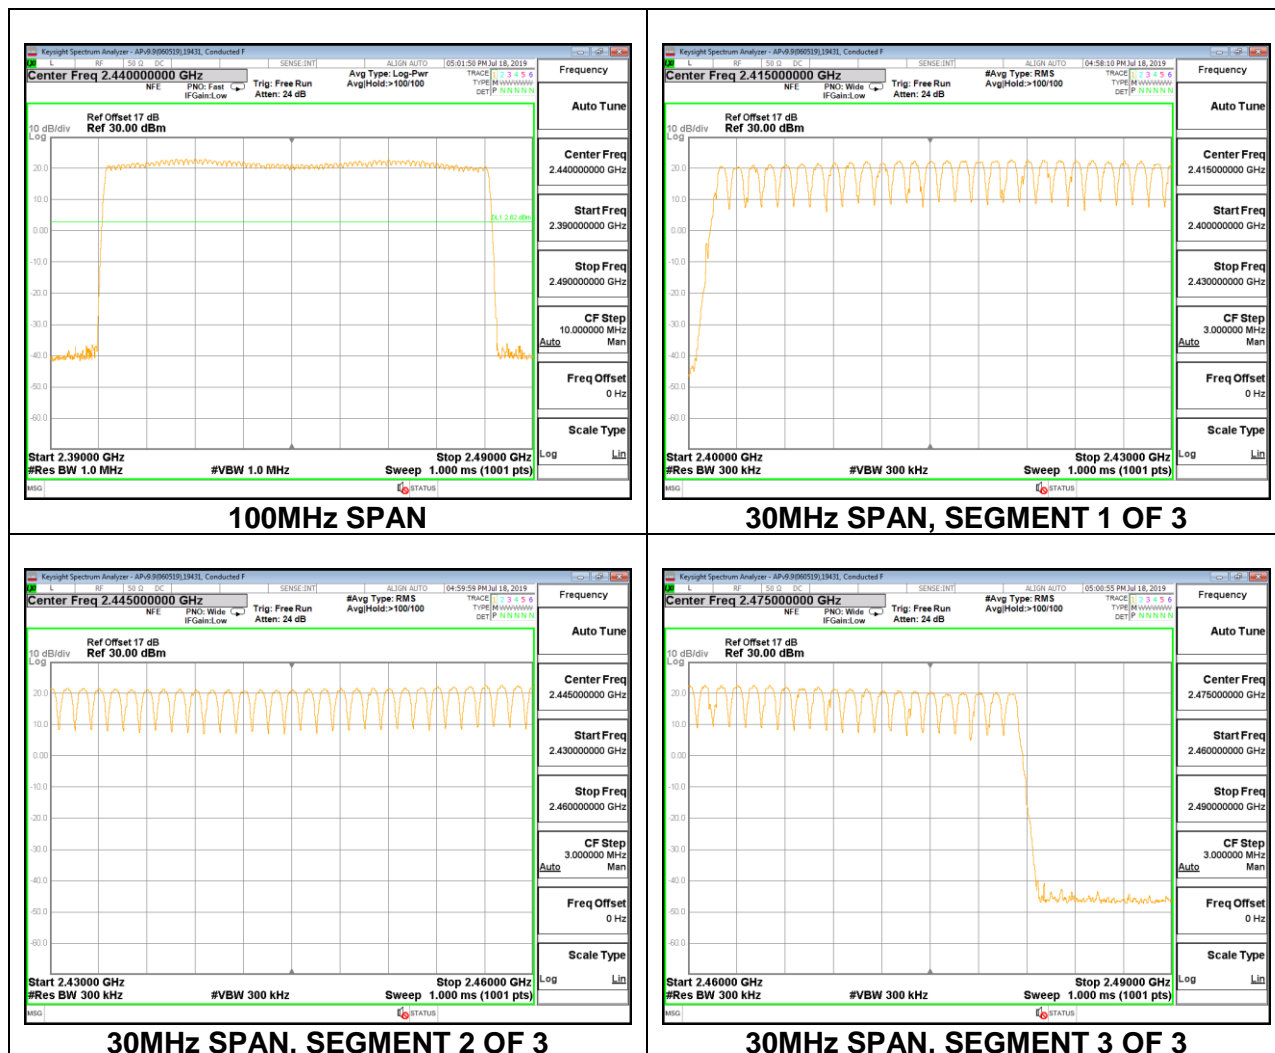


Antenna 3

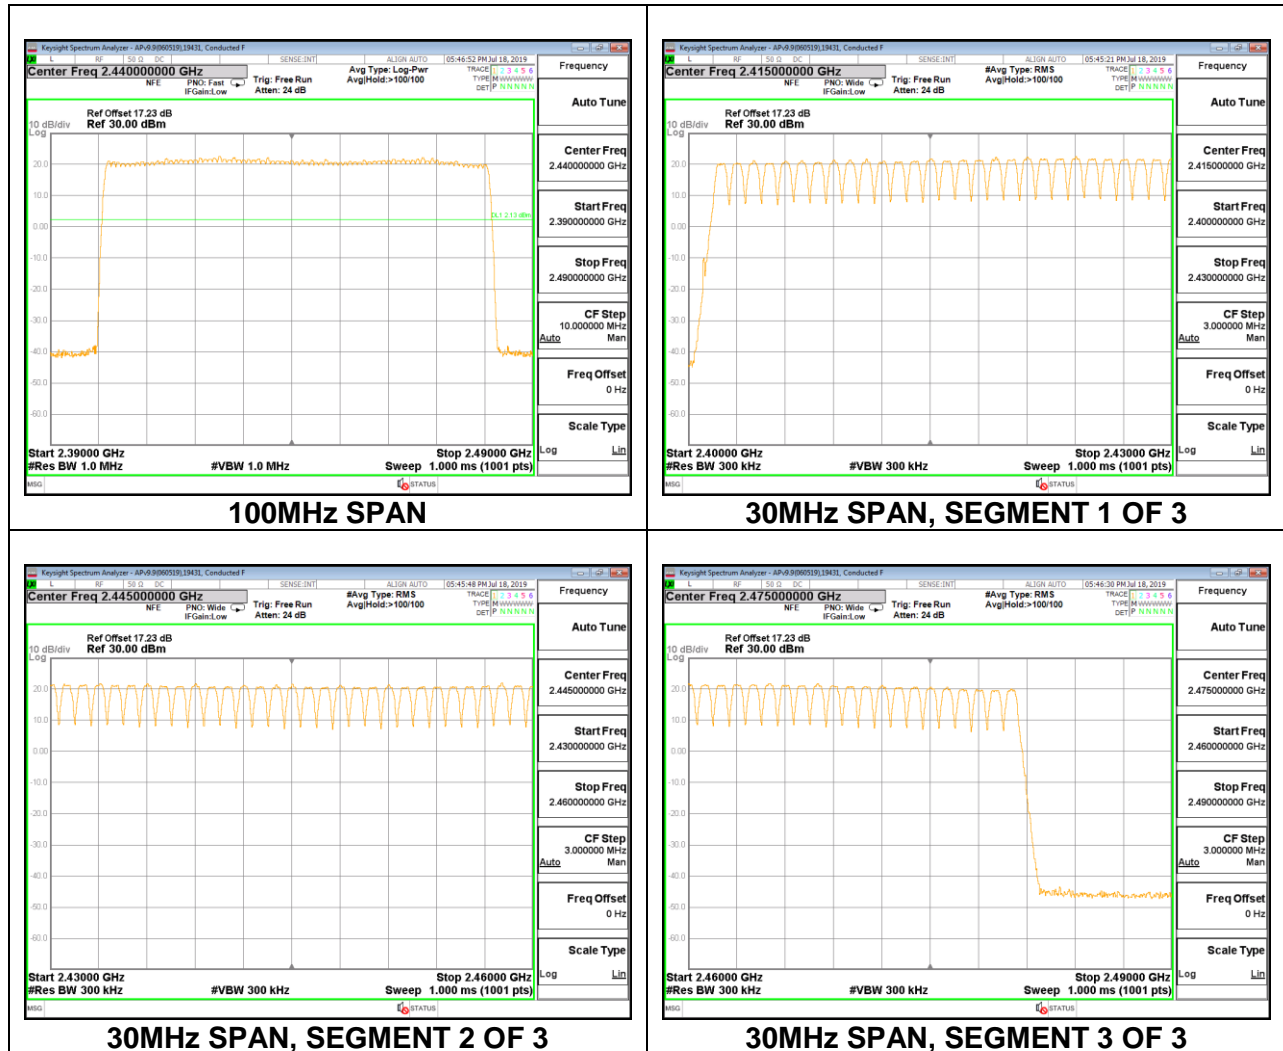


8.4.2 HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

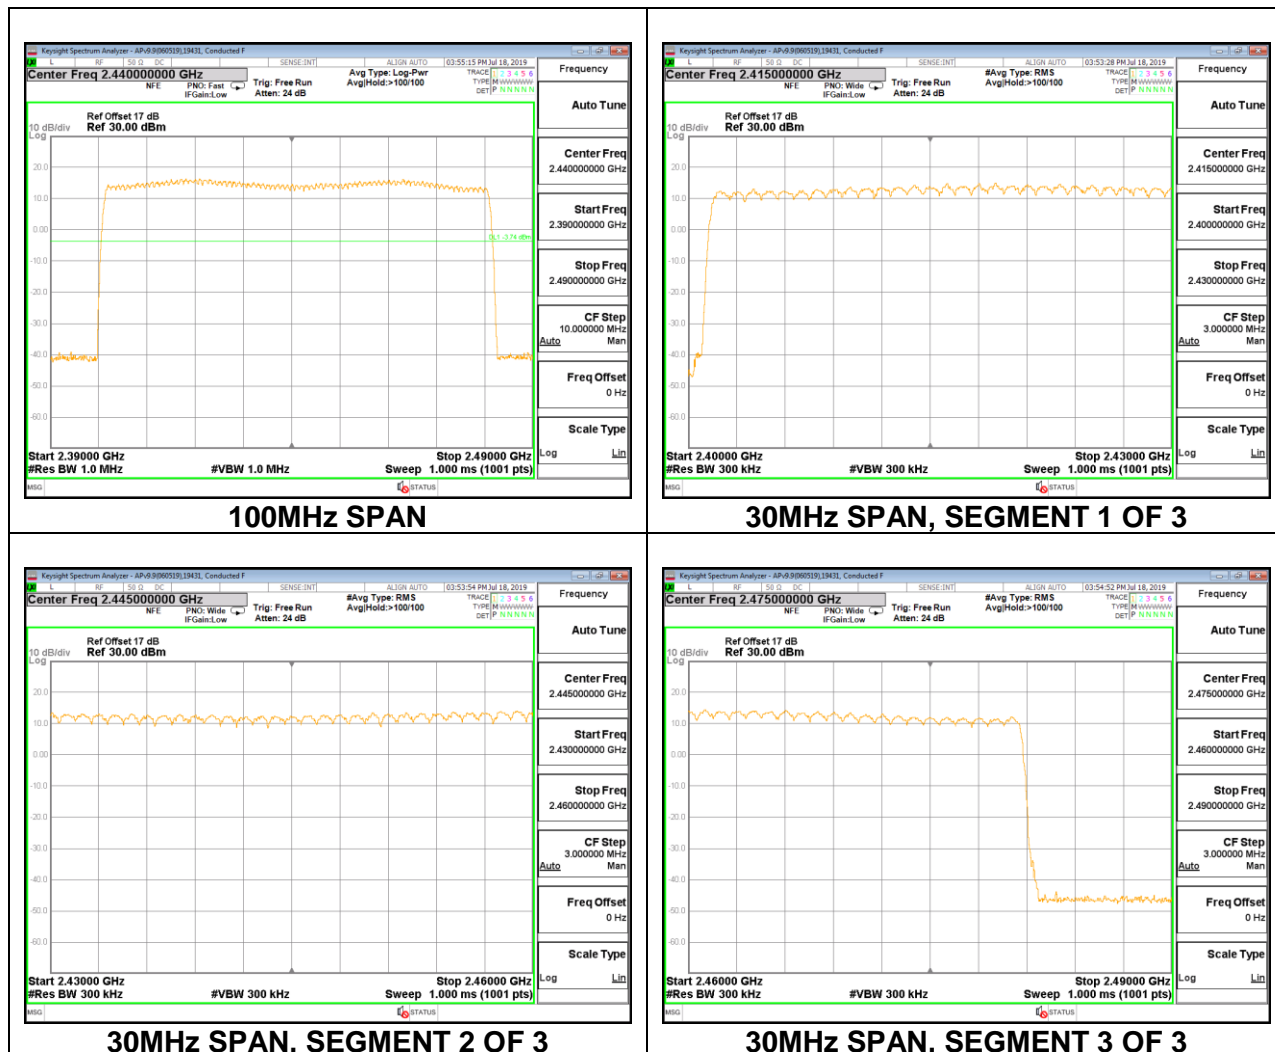


Antenna 3

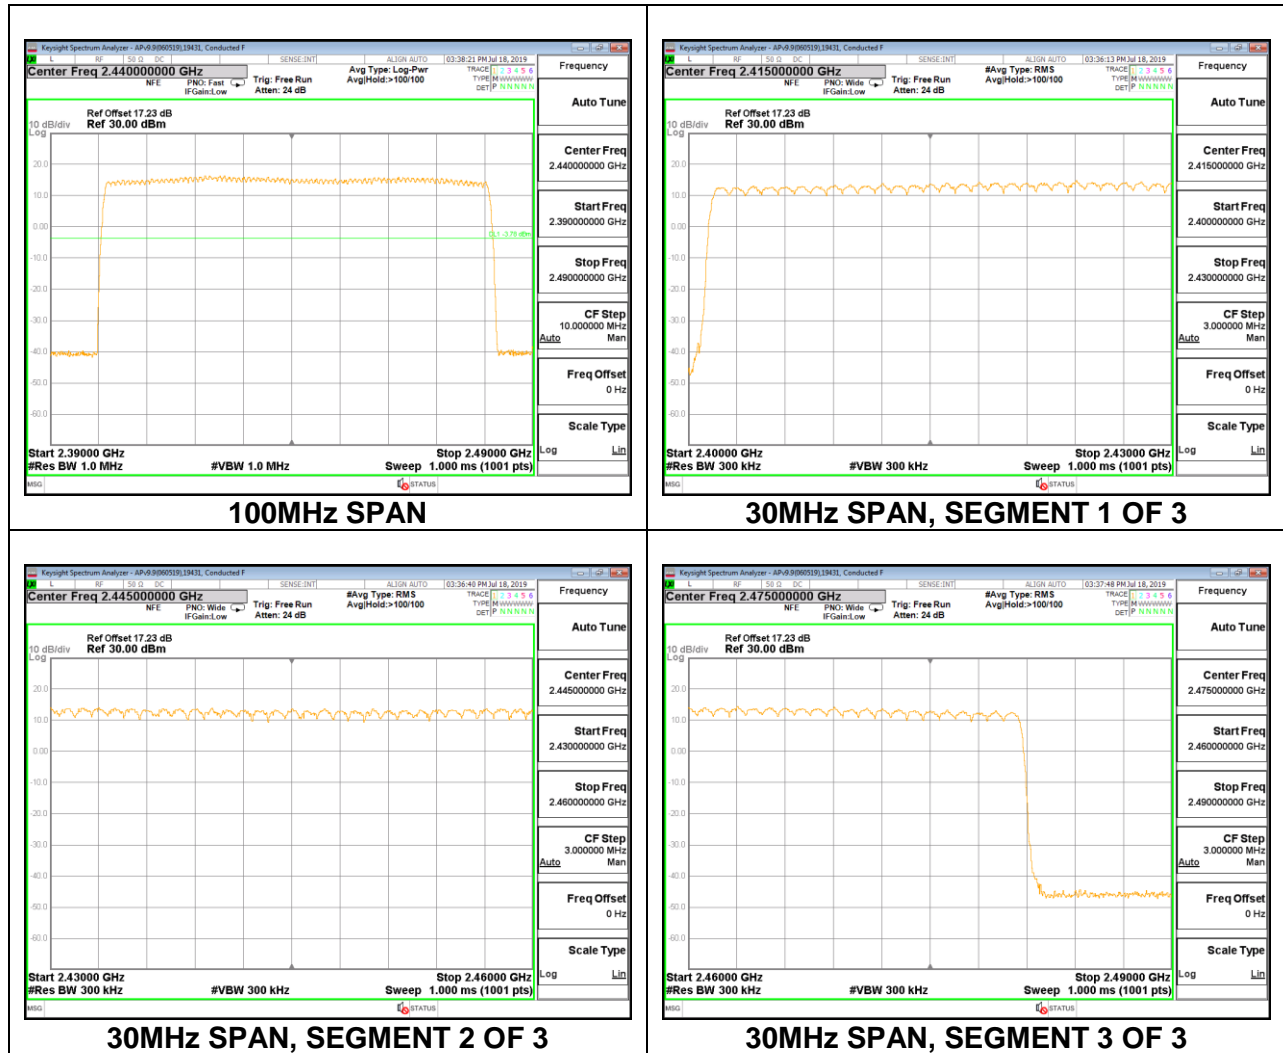


8.4.3 LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

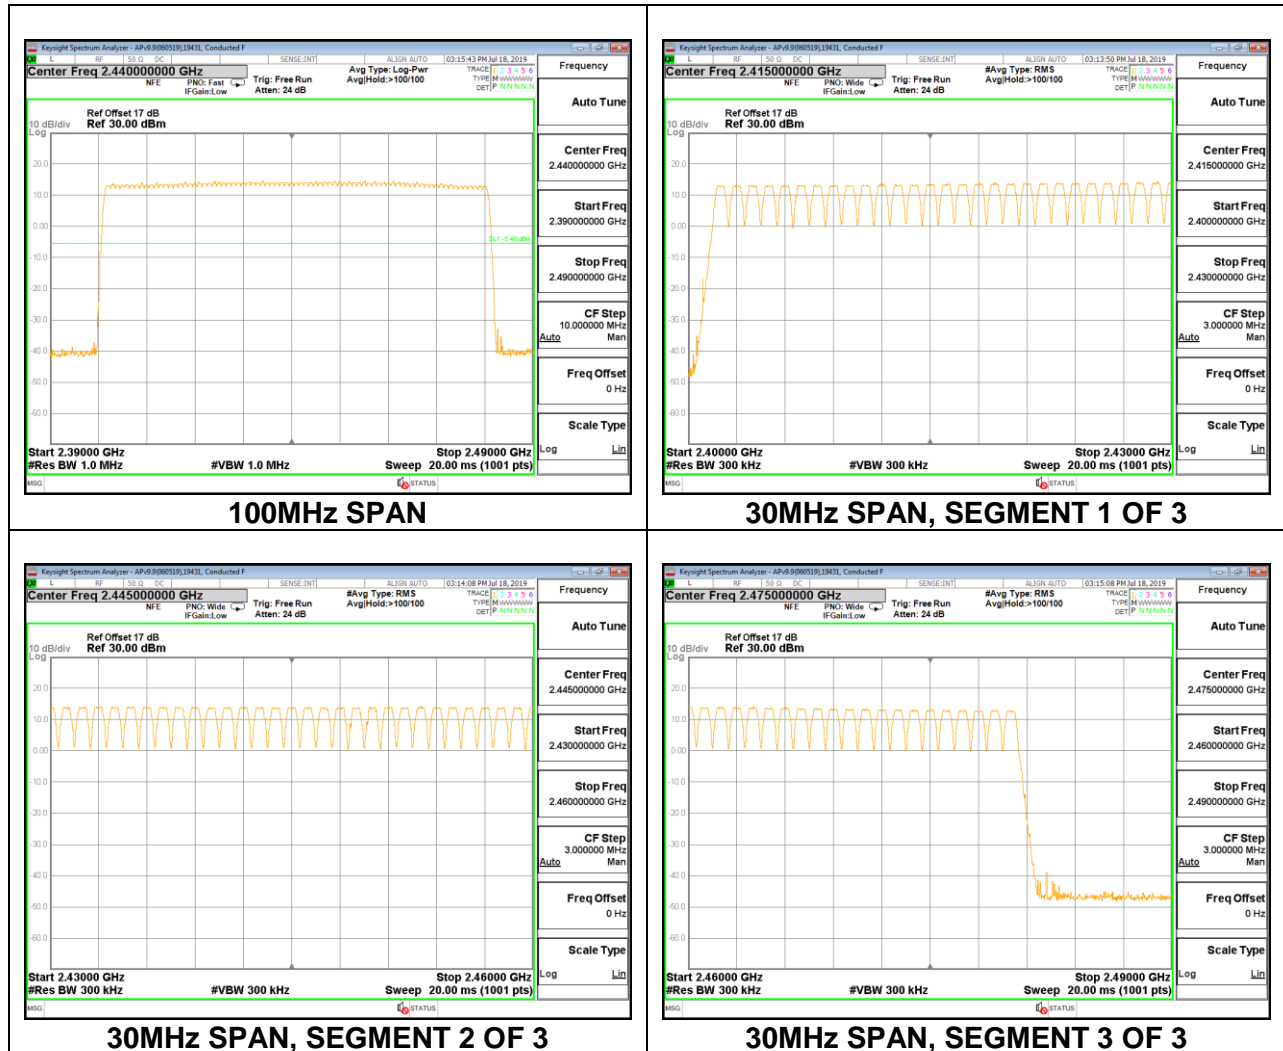


Antenna 3

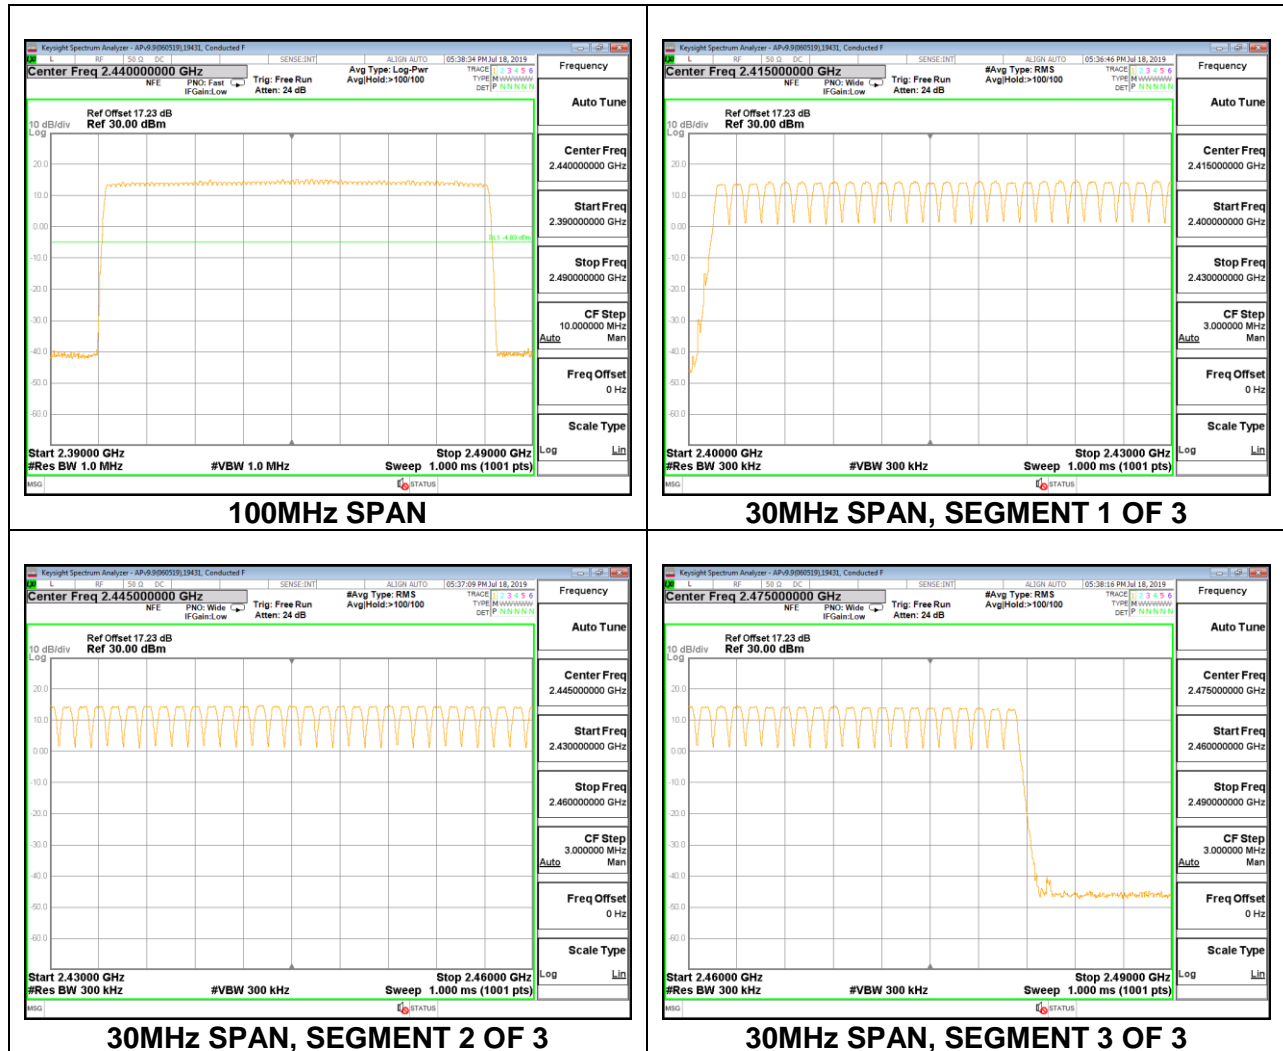


8.4.4 LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

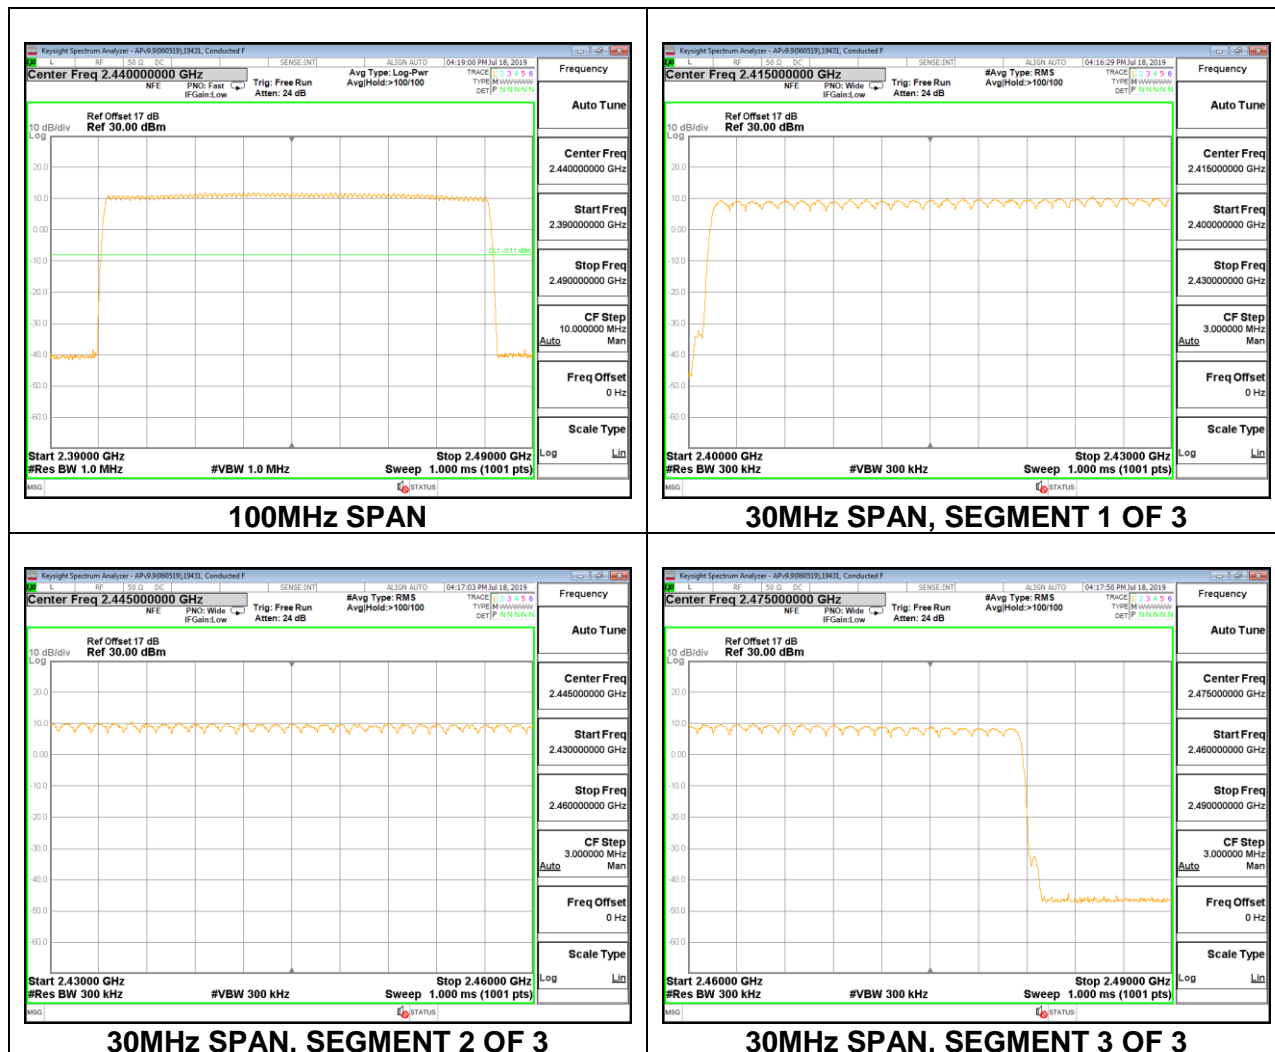

Antenna 3

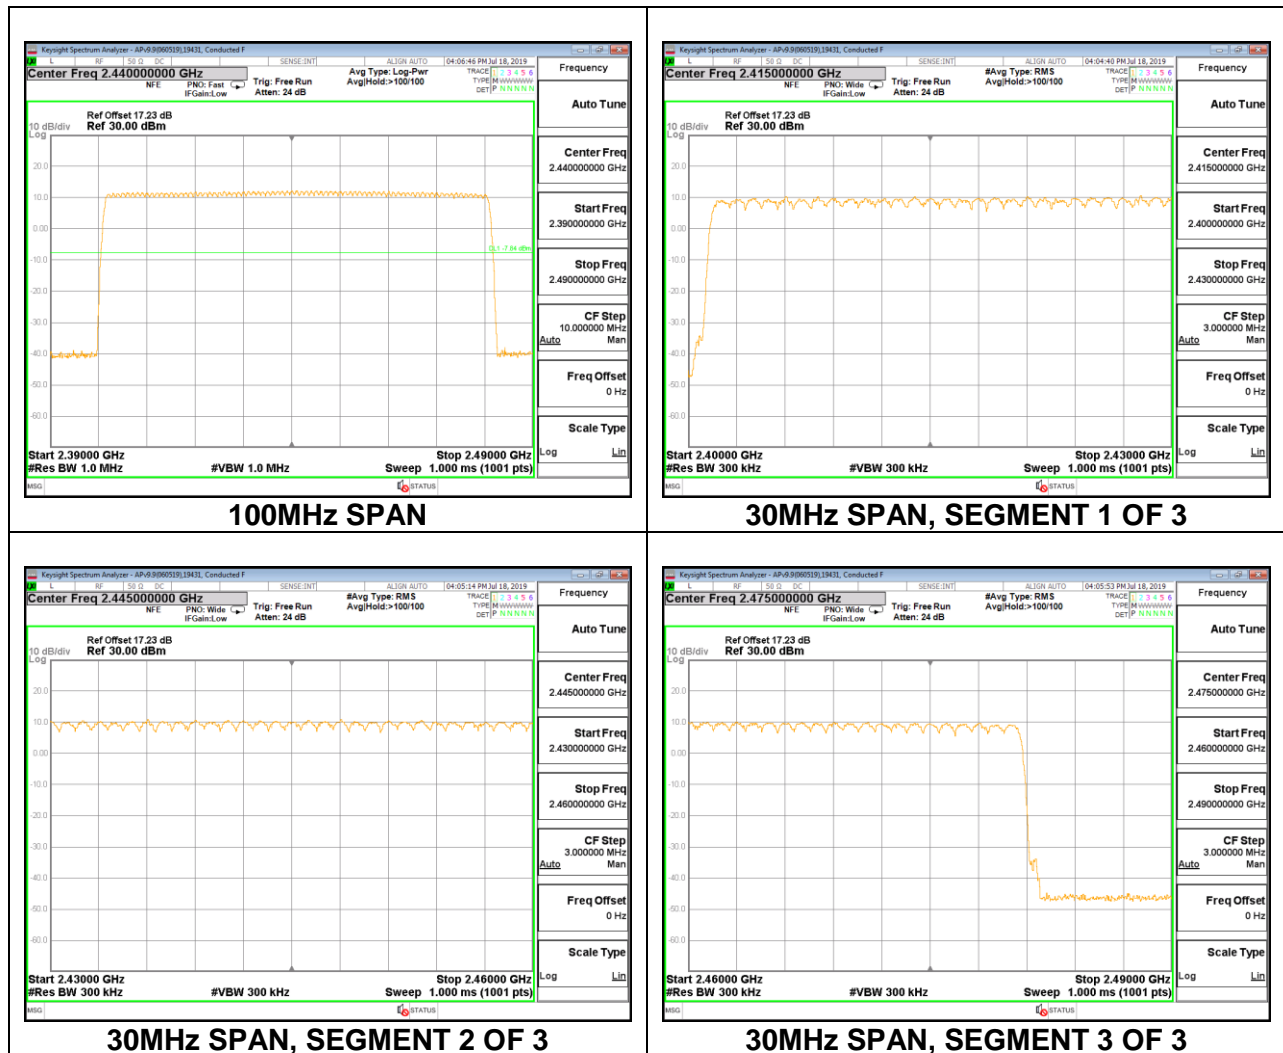

8.5 AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS

8.5.1 HIGH POWER BASIC DATA RATE GFSK MODULATION


Antenna 4

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.381	30	0.1143	0.4	-0.2857
DH3	1.636	16	0.2618	0.4	-0.1382
DH5	2.884	11	0.3172	0.4	-0.0828
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.381	7.5	0.02858	0.4	-0.3714
DH3	1.636	4	0.06544	0.4	-0.3346
DH5	2.884	2.75	0.07931	0.4	-0.3207

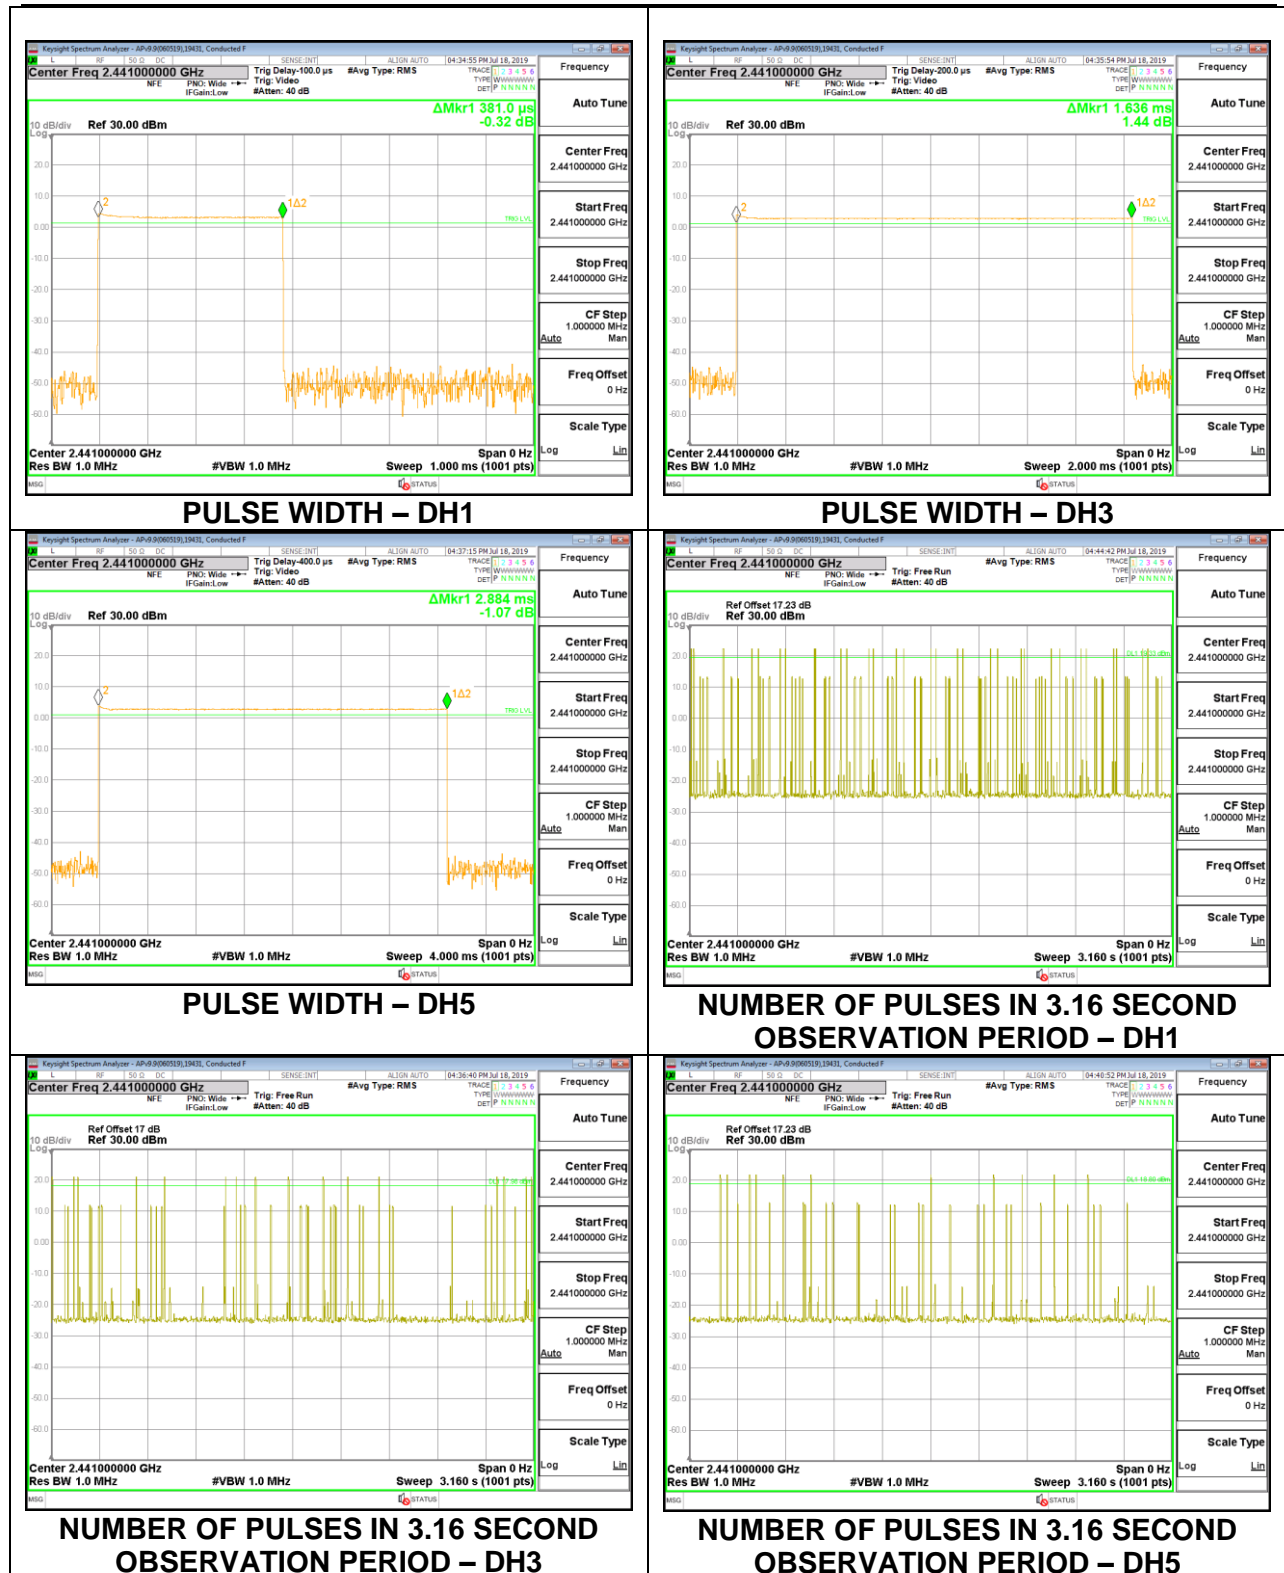

Antenna 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.381	30	0.1143	0.4	-0.2857
DH3	1.636	16	0.2618	0.4	-0.1382
DH5	2.884	11	0.3172	0.4	-0.0828
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.381	7.5	0.02858	0.4	-0.3714
DH3	1.636	4	0.06544	0.4	-0.3346
DH5	2.884	2.75	0.07931	0.4	-0.3207

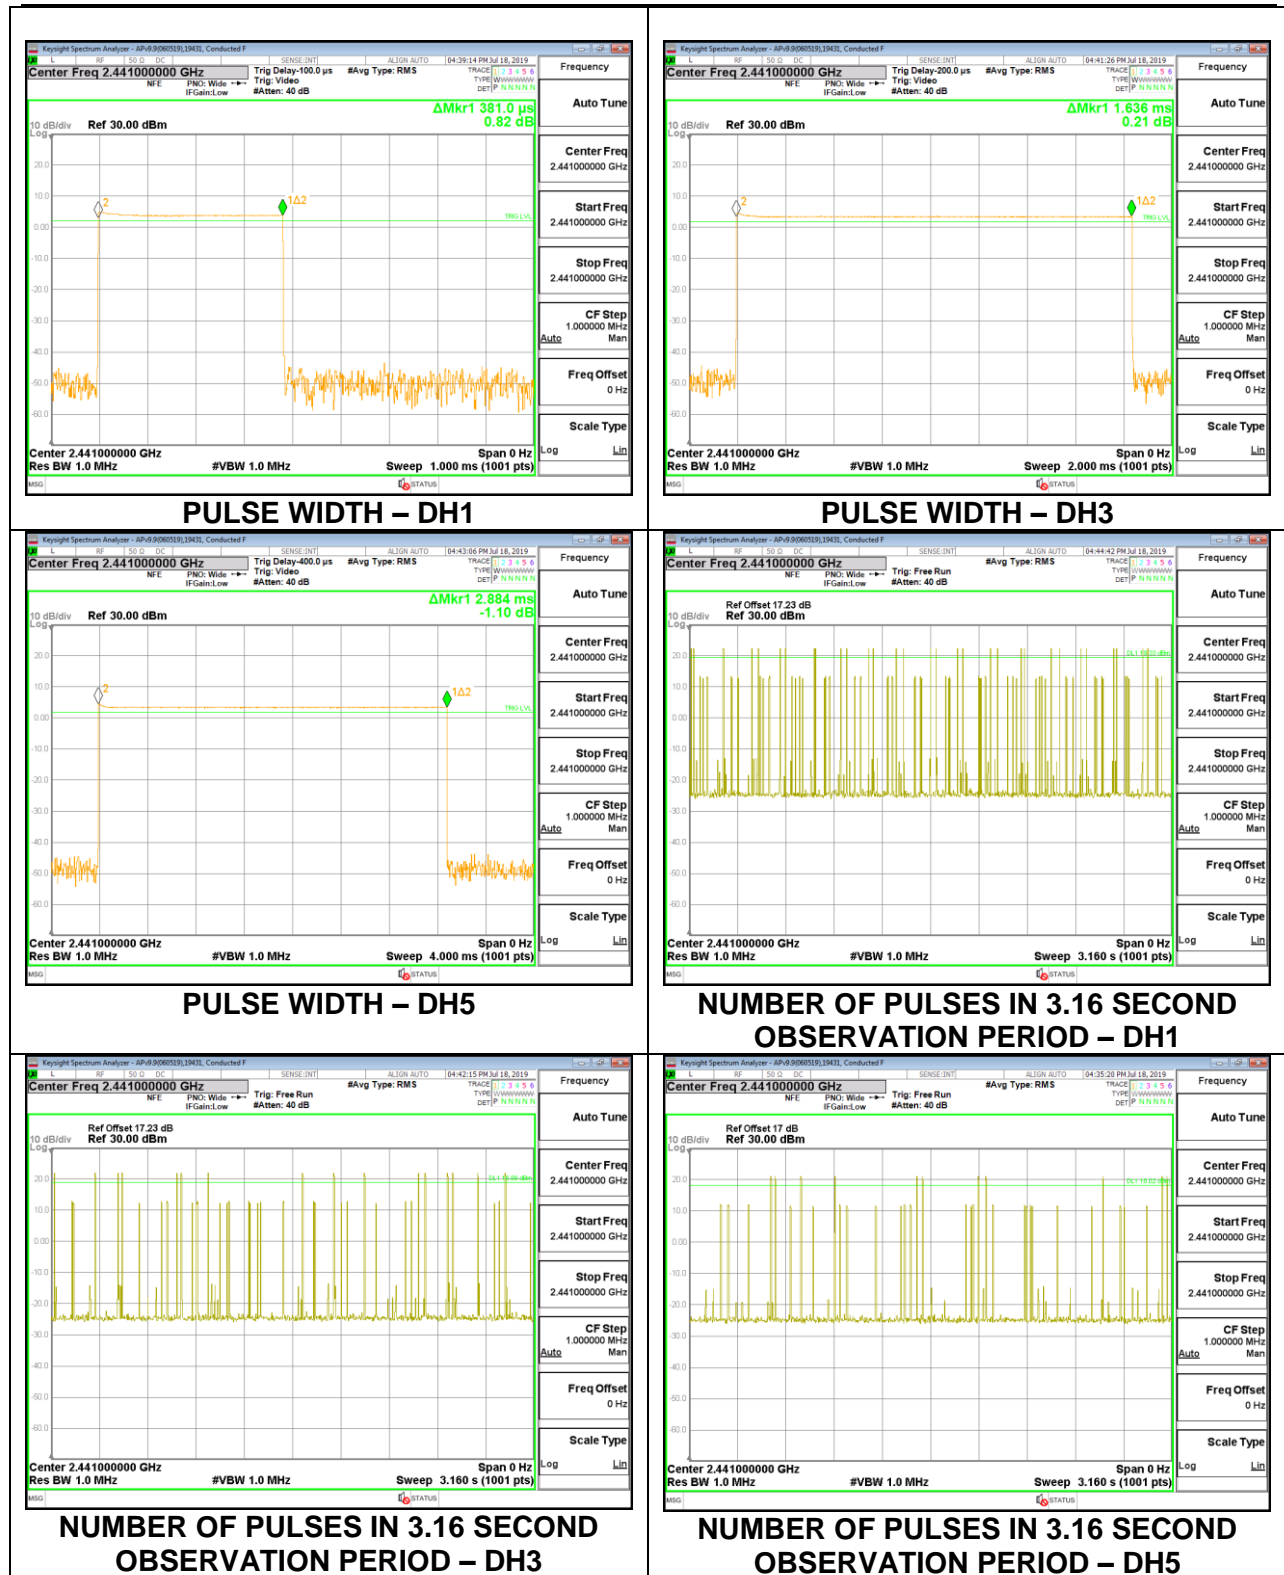


8.5.2 HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
3DH1	0.387	31	0.11997	0.4	-0.28
3DH3	1.638	16	0.26208	0.4	-0.1379
3DH5	2.888	11	0.31768	0.4	-0.0823


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.

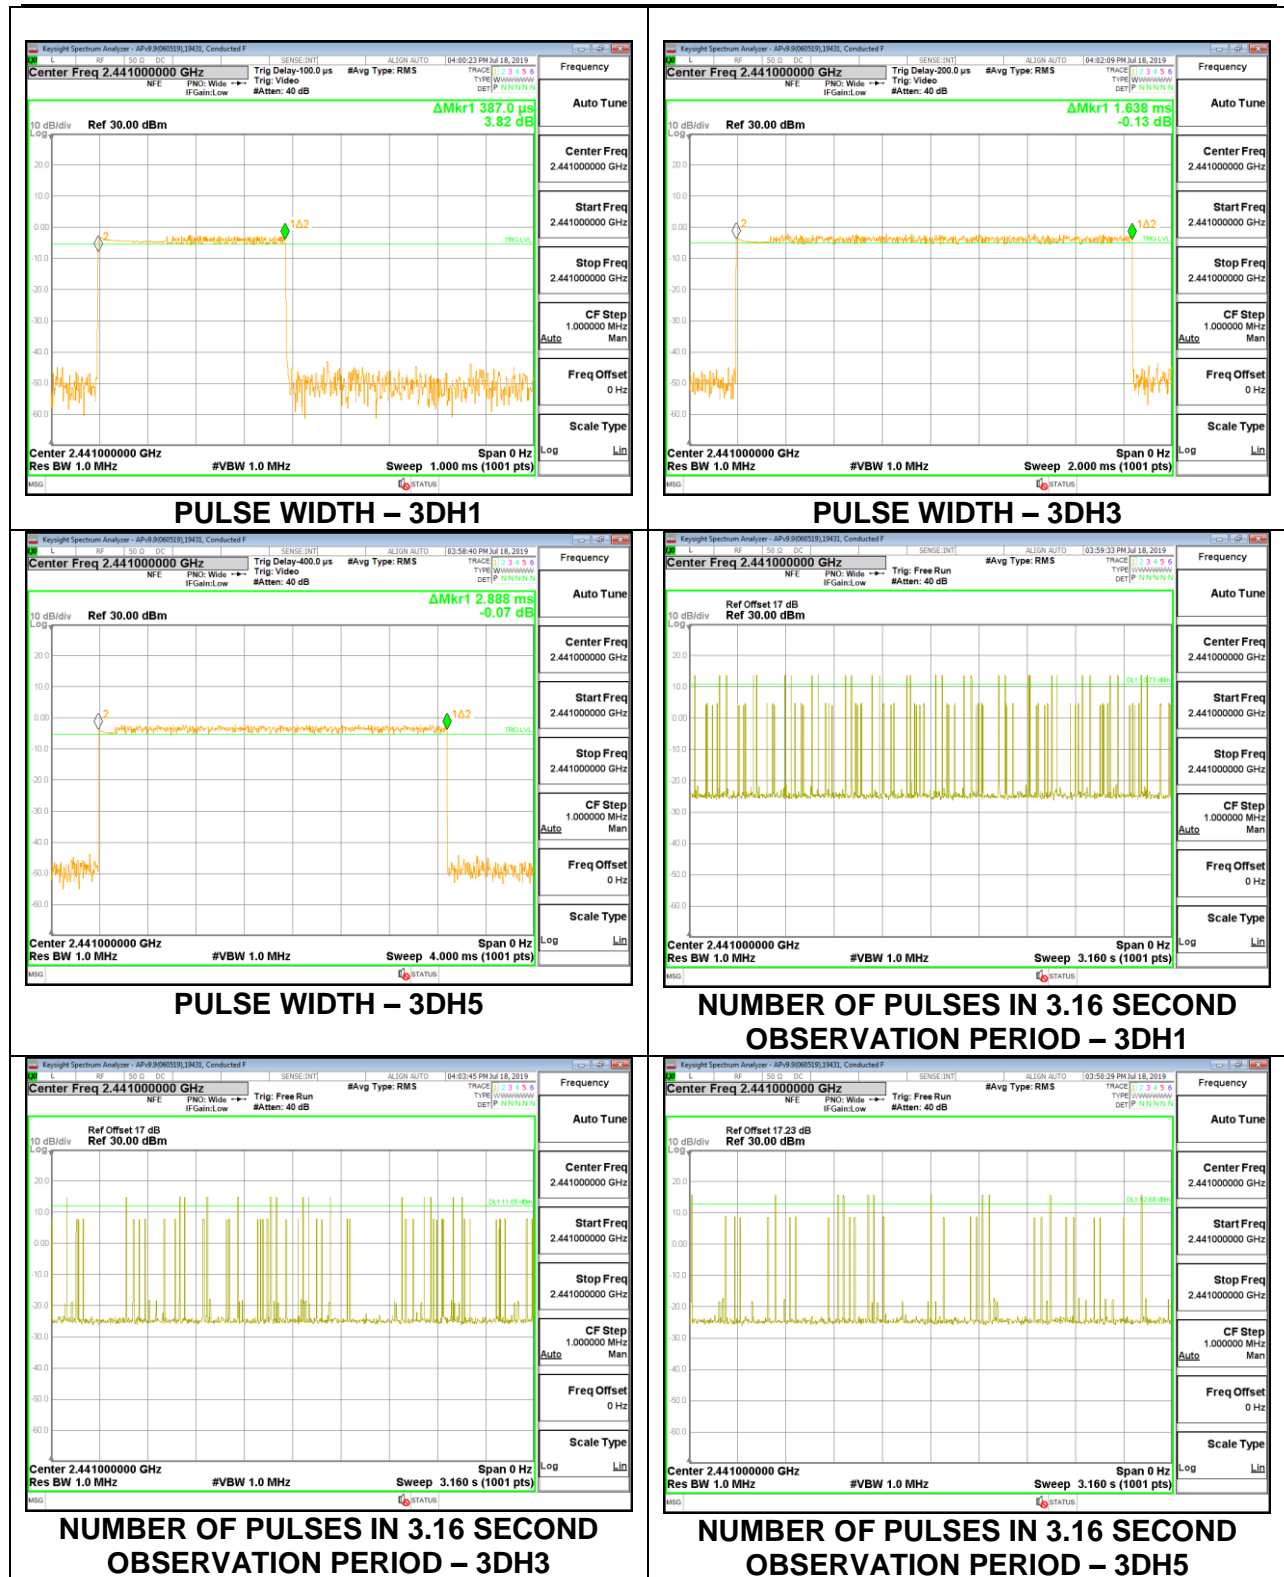


Antenna 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
3DH1	0.387	31	0.11997	0.4	-0.28
3DH3	1.638	16	0.26208	0.4	-0.1379
3DH5	2.888	11	0.31768	0.4	-0.0823


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.

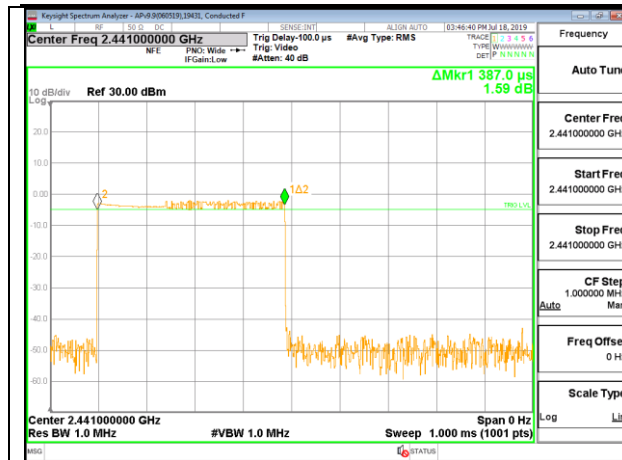


PULSE WIDTH – 3DH1

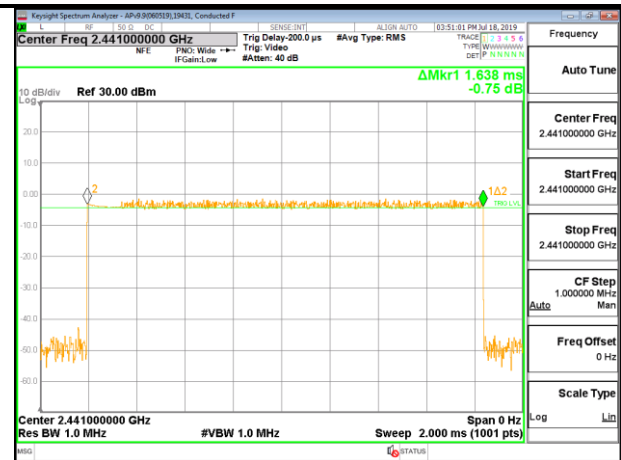


PULSE WIDTH – 3DH3

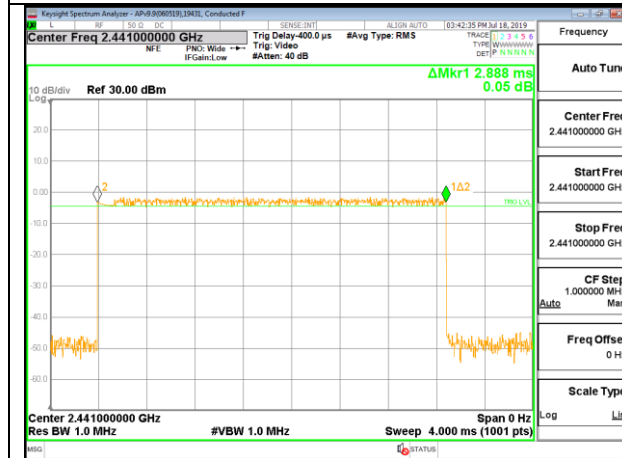


PULSE WIDTH – 3DH5

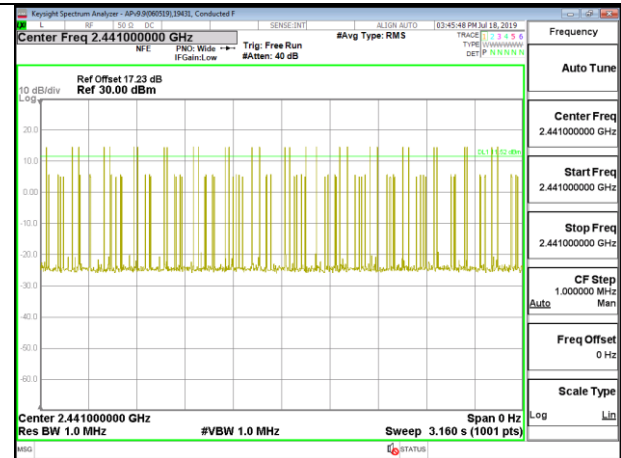

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**

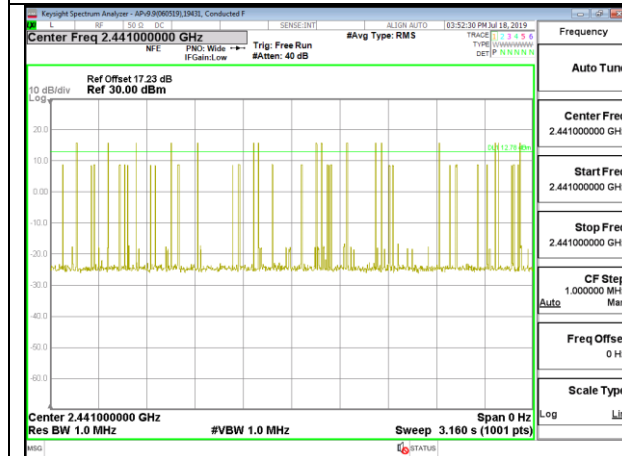

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**

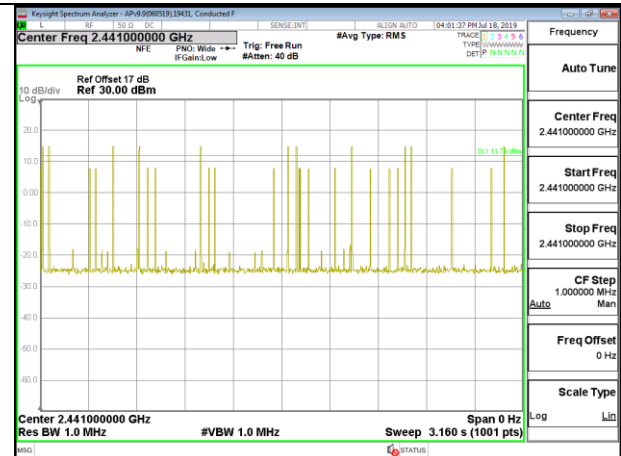


**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**


8.5.3 LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.381	31	0.1181	0.4	-0.2819
DH3	1.636	16	0.2618	0.4	-0.1382
DH5	2.884	11	0.3172	0.4	-0.0828
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.381	7.75	0.02953	0.4	-0.3705
DH3	1.636	4	0.06544	0.4	-0.3346
DH5	2.884	2.75	0.07931	0.4	-0.3207

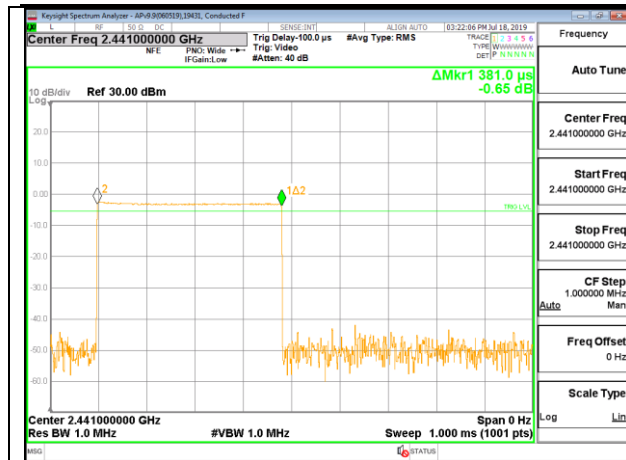


PULSE WIDTH – DH1

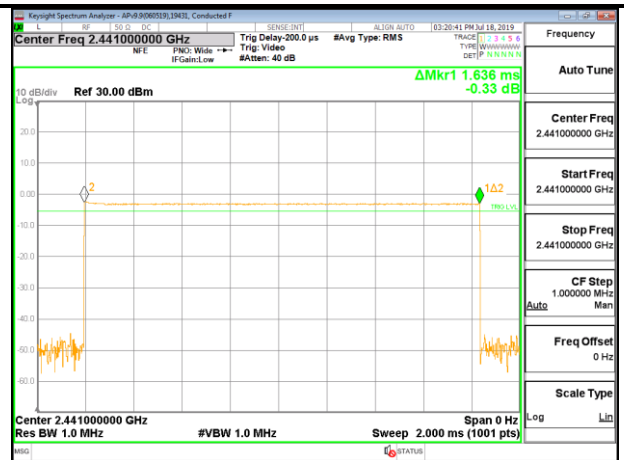


PULSE WIDTH – DH3

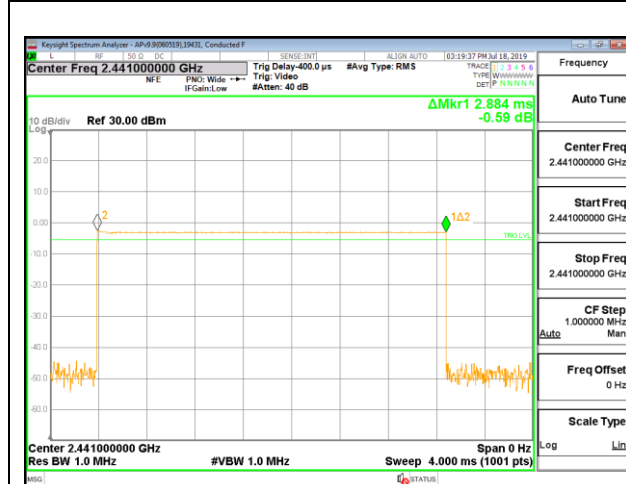


PULSE WIDTH – DH5

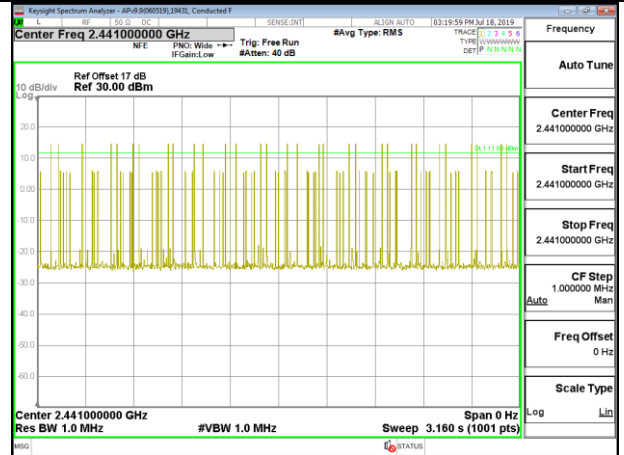

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH1**

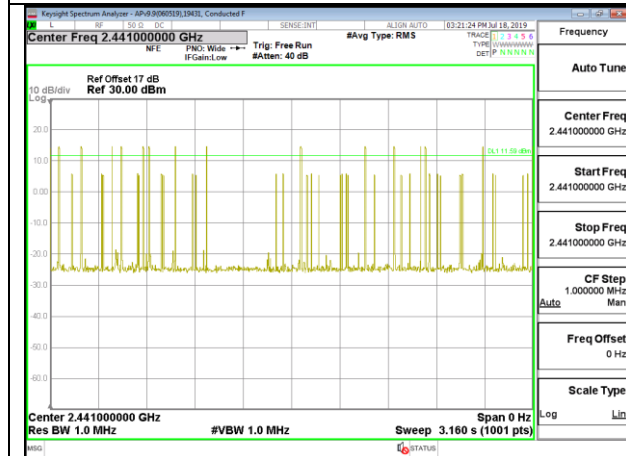

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH3**

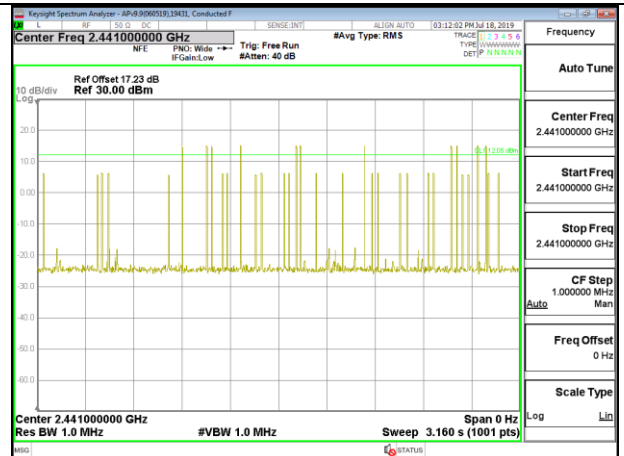

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH5**

Antenna 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.381	31	0.1181	0.4	-0.2819
DH3	1.636	16	0.2618	0.4	-0.1382
DH5	2.884	11	0.3172	0.4	-0.0828
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.381	7.75	0.02953	0.4	-0.3705
DH3	1.636	4	0.06544	0.4	-0.3346
DH5	2.884	2.75	0.07931	0.4	-0.3207




8.5.4 LOW POWER ENHANCED DATA RATE 8PSK MODULATION


Antenna 4

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
3DH1	0.387	31	0.11997	0.4	-0.28
3DH3	1.638	16	0.26208	0.4	-0.1379
3DH5	2.888	11	0.31768	0.4	-0.0823


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.

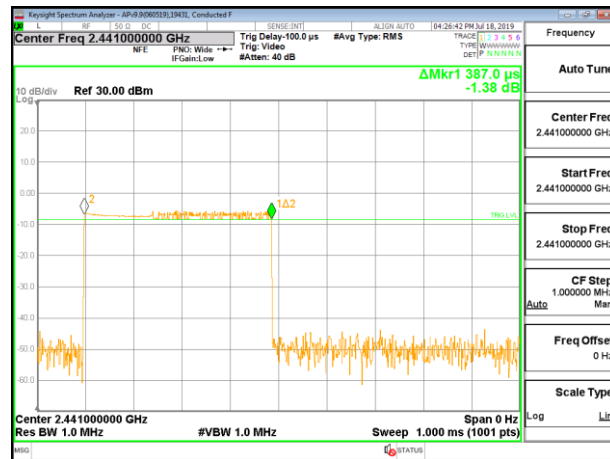


PULSE WIDTH – 3DH1

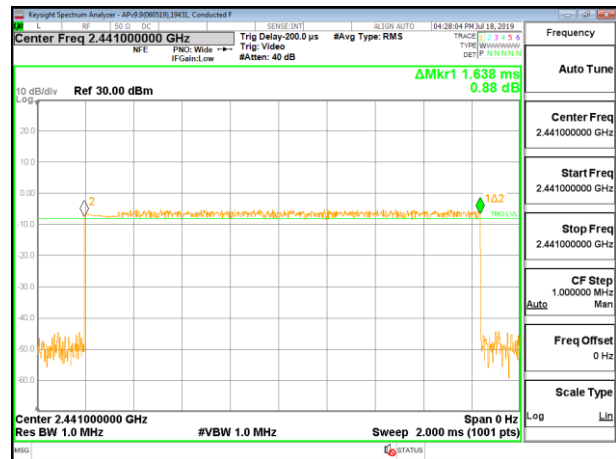


PULSE WIDTH – 3DH3

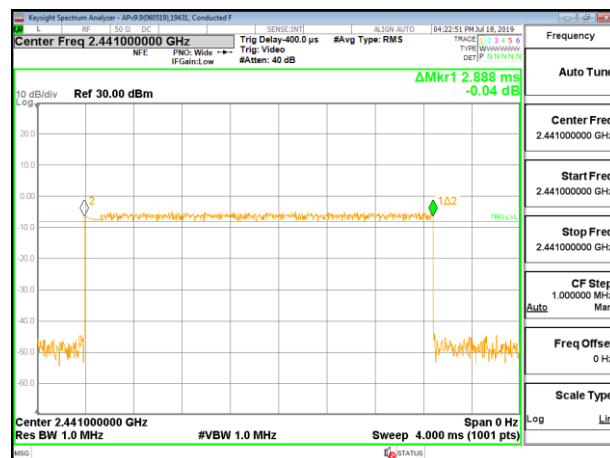


PULSE WIDTH – 3DH5

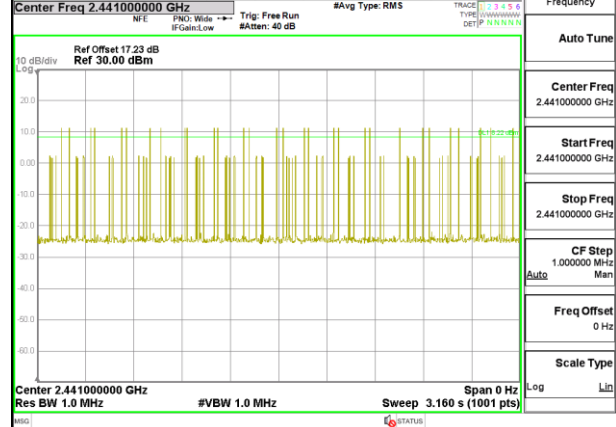

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**

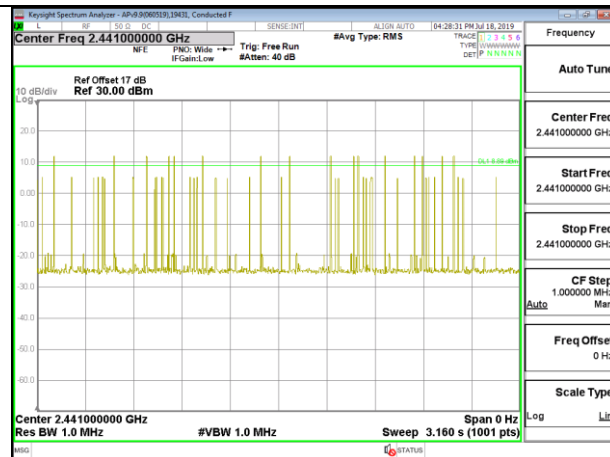

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**

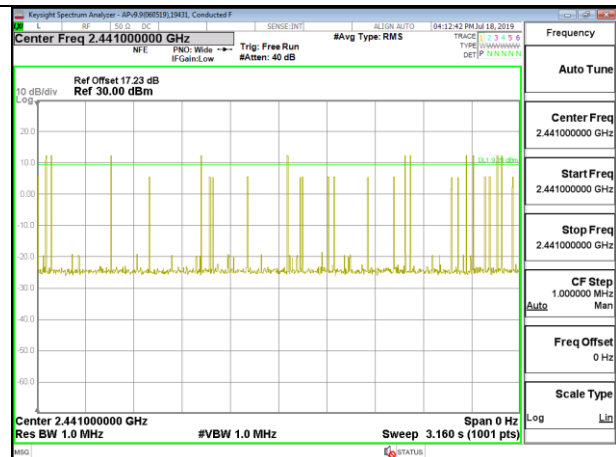

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

Antenna 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
3DH1	0.387	31	0.11997	0.4	-0.28
3DH3	1.638	16	0.26208	0.4	-0.1379
3DH5	2.888	11	0.31768	0.4	-0.0823

Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.