
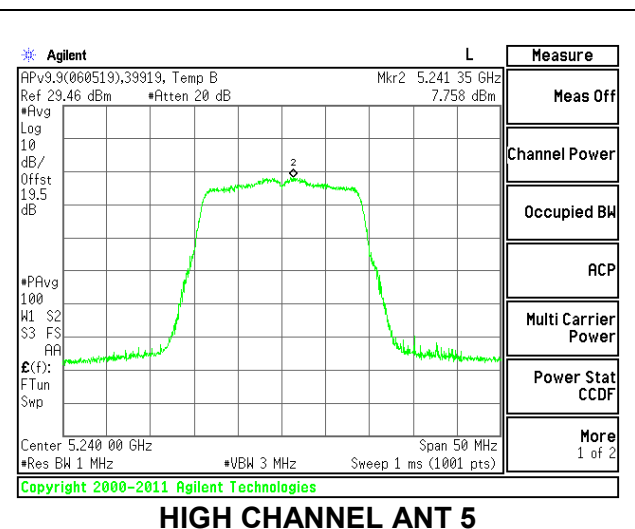
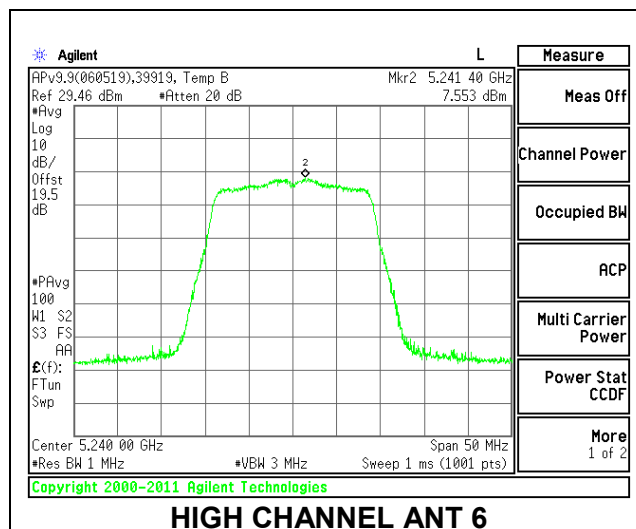
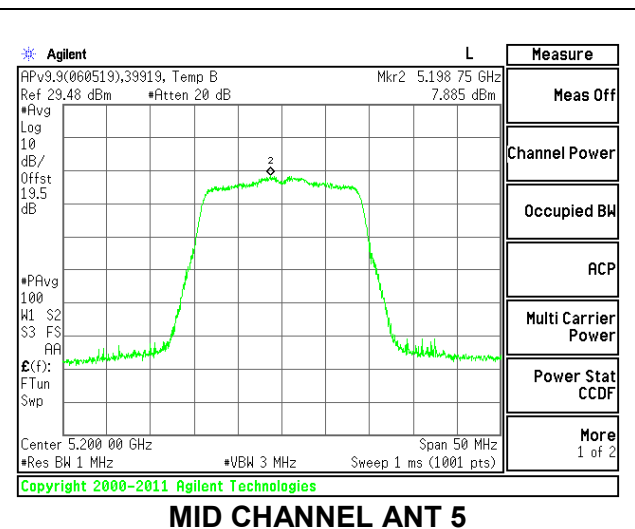
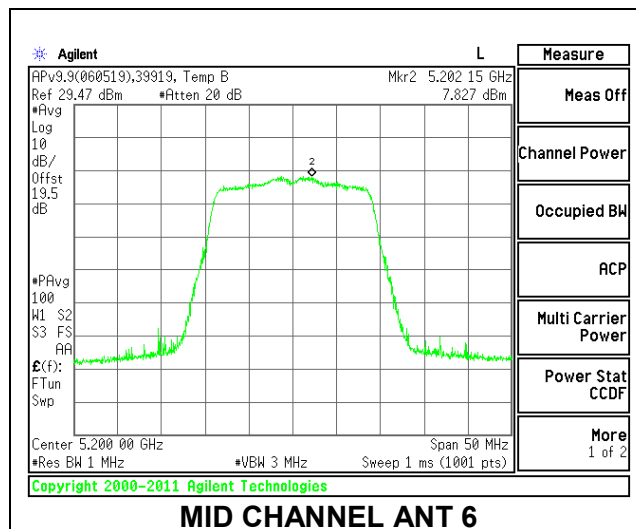
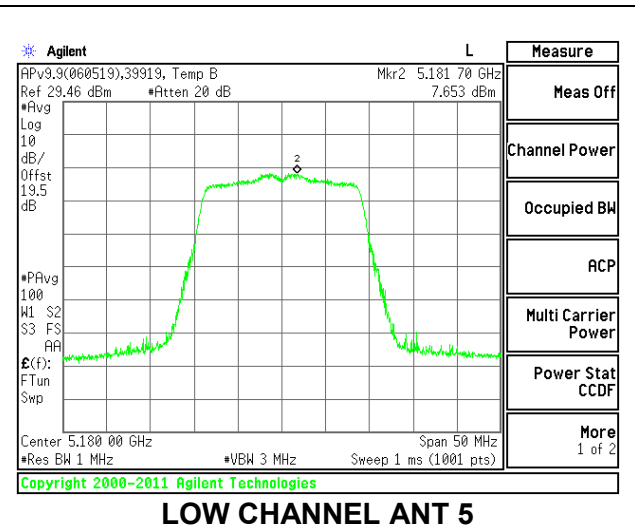


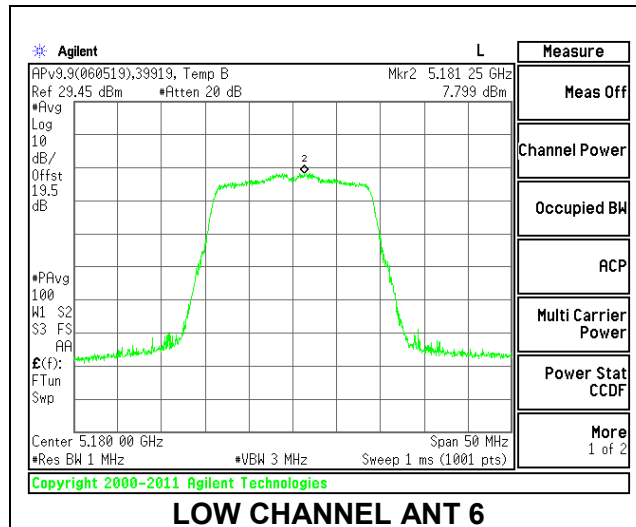

8.5.2. 802.11n HT40 MODE IN THE 5.2 GHz BAND (FCC)

1TX Antenna 6 MODE (FCC) MOBILE

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5190	42.30	-4.2
High	5230	42.10	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	27.20	24.00	11.00	11.00
High	5230	24.00	23.00	27.20	24.00	11.00	11.00


Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	17.39	17.39	24.00	-6.61
High	5230	21.36	21.36	24.00	-2.64

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	4.160	4.25	11.00	-6.75
High	5230	8.033	8.12	11.00	-2.88

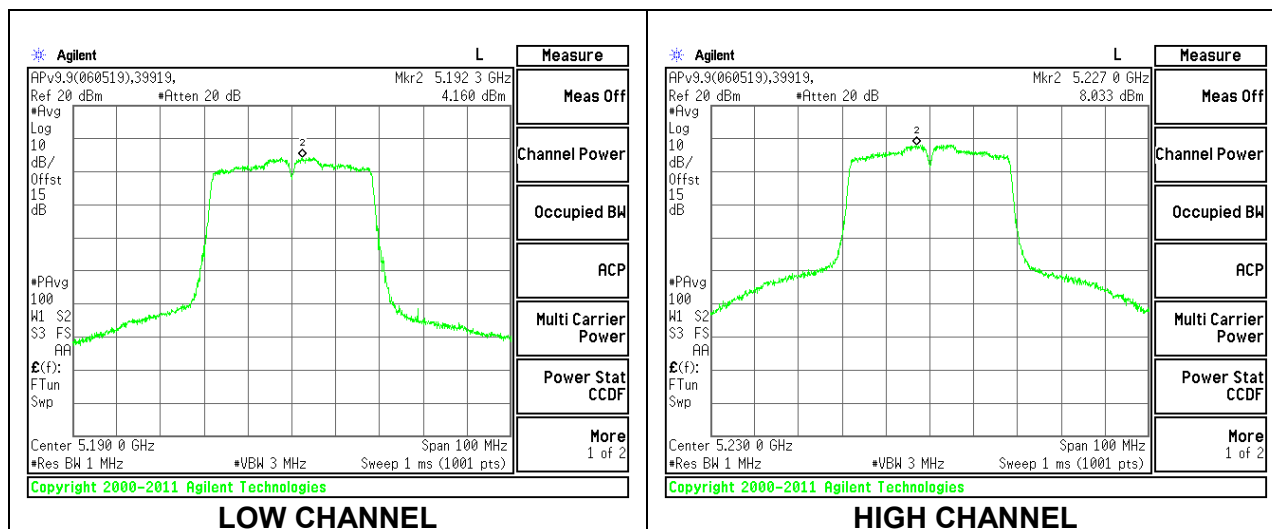

1TX Antenna 5 MODE (FCC) MOBILE

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5190	42.00	-10.7
High	5230	42.20	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	33.70	24.00	11.00	11.00
High	5230	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	17.41	17.41	24.00	-6.59
High	5230	21.39	21.39	24.00	-2.61

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	4.414	4.50	11.00	-6.50
High	5230	8.167	8.26	11.00	-2.74

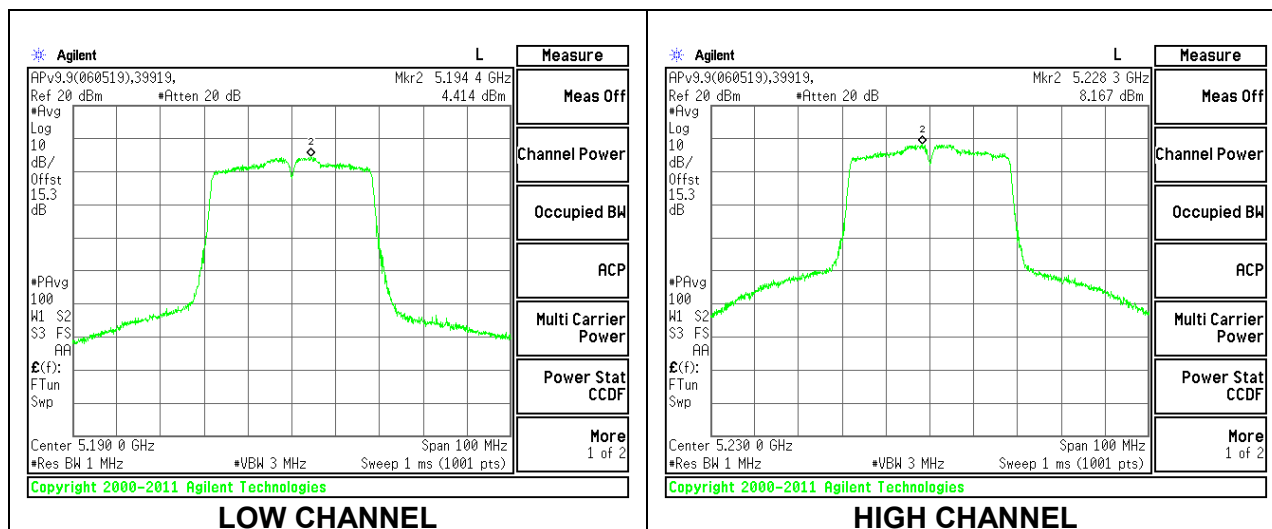

2TX Antenna 6 + Antenna 5 CDD MODE (FCC) MOBILE

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5190	41.50	-6.33	-3.85
High	5230	41.40	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	29.33	24.00	11.00	11.00
High	5230	24.00	23.00	29.33	24.00	11.00	11.00





Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	16.88	16.75	19.83	24.00	-4.17
High	5230	19.85	19.80	22.84	24.00	-1.16

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	4.118	3.921	7.12	11.00	-3.88
High	5230	6.716	6.531	9.72	11.00	-1.28

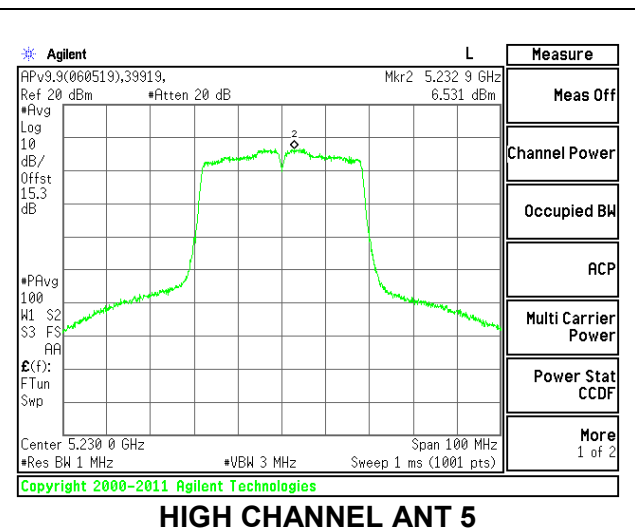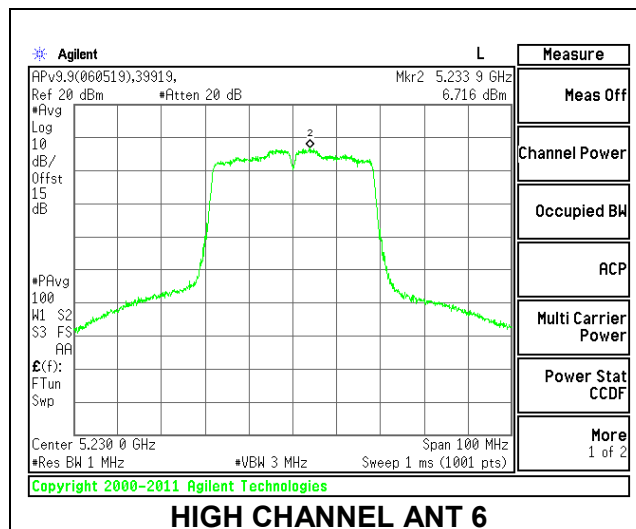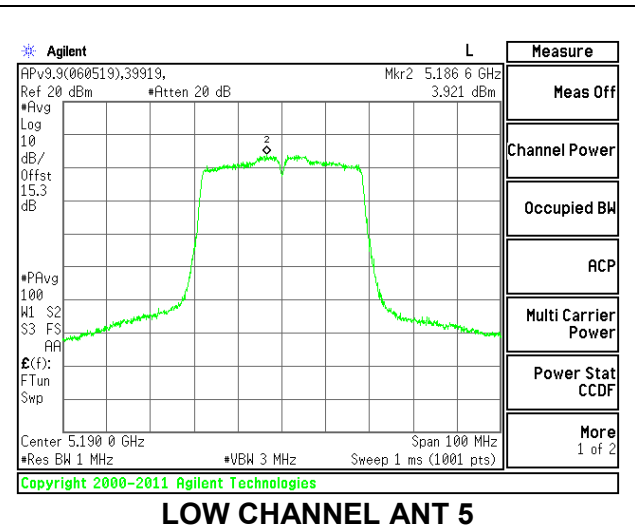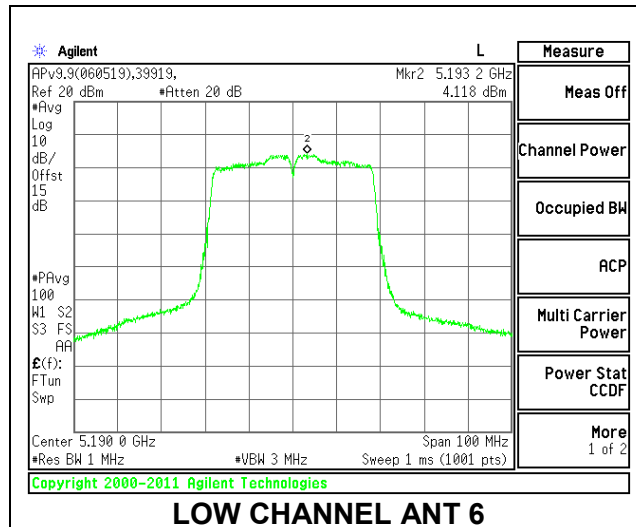

8.5.3. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND (FCC)

1TX Antenna 6 MODE (FCC) MOBILE

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Mid	5210	84.00	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	27.20	24.00	11.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	17.40	17.40	24.00	-6.60

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	1.503	1.69	11.00	-9.31

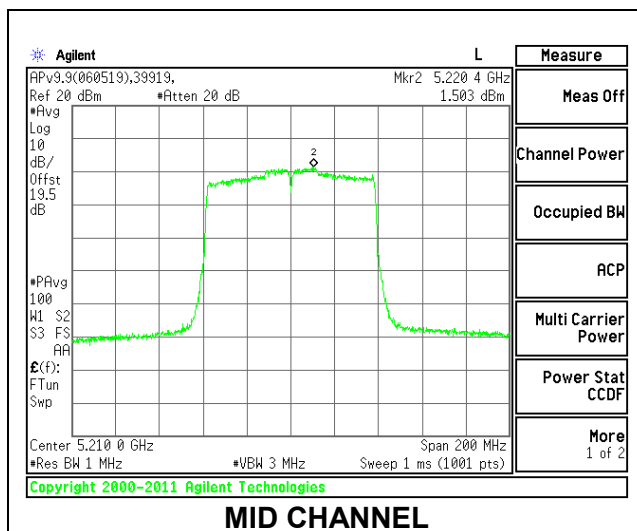

1TX Antenna 5 MODE (FCC) MOBILE

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Mid	5210	84.80	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	17.33	17.33	24.00	-6.67

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	0.902	1.09	11.00	-9.91

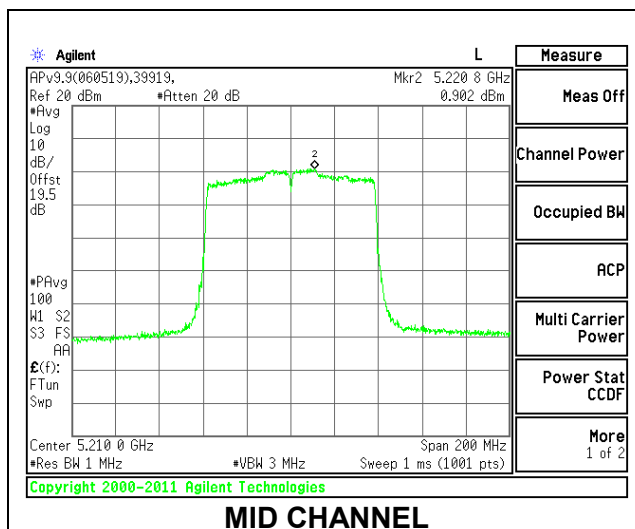

2TX Antenna 6 + Antenna 5 CDD MODE (FCC) MOBILE

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Mid	5210	84.40	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	29.33	24.00	11.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	16.35	16.39	19.38	24.00	-4.62

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	0.249	0.274	3.46	11.00	-7.54

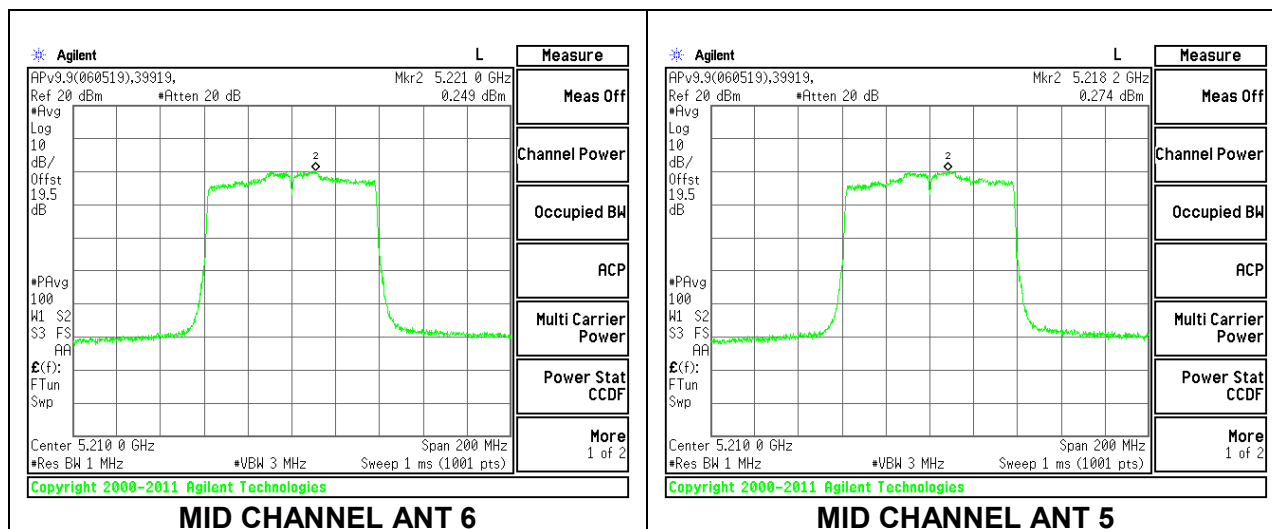

8.5.4. 802.11ax HE20 MODE IN THE 5.2 GHz BAND (FCC)

1TX Antenna 6 MODE (FCC) MOBILE – 242 Tones, RU Index 61

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5180	21.65	-4.2
Mid	5200	21.55	-4.2
High	5240	22.05	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	23.00	27.20	24.00	11.00	11.00
Mid	5200	24.00	23.00	27.20	24.00	11.00	11.00
High	5240	24.00	23.00	27.20	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	17.87	17.87	24.00	-6.13
Mid	5200	20.81	20.81	24.00	-3.19
High	5240	20.85	20.85	24.00	-3.15

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	7.236	7.24	11.00	-3.76
Mid	5200	10.534	10.53	11.00	-0.47
High	5240	10.573	10.57	11.00	-0.43

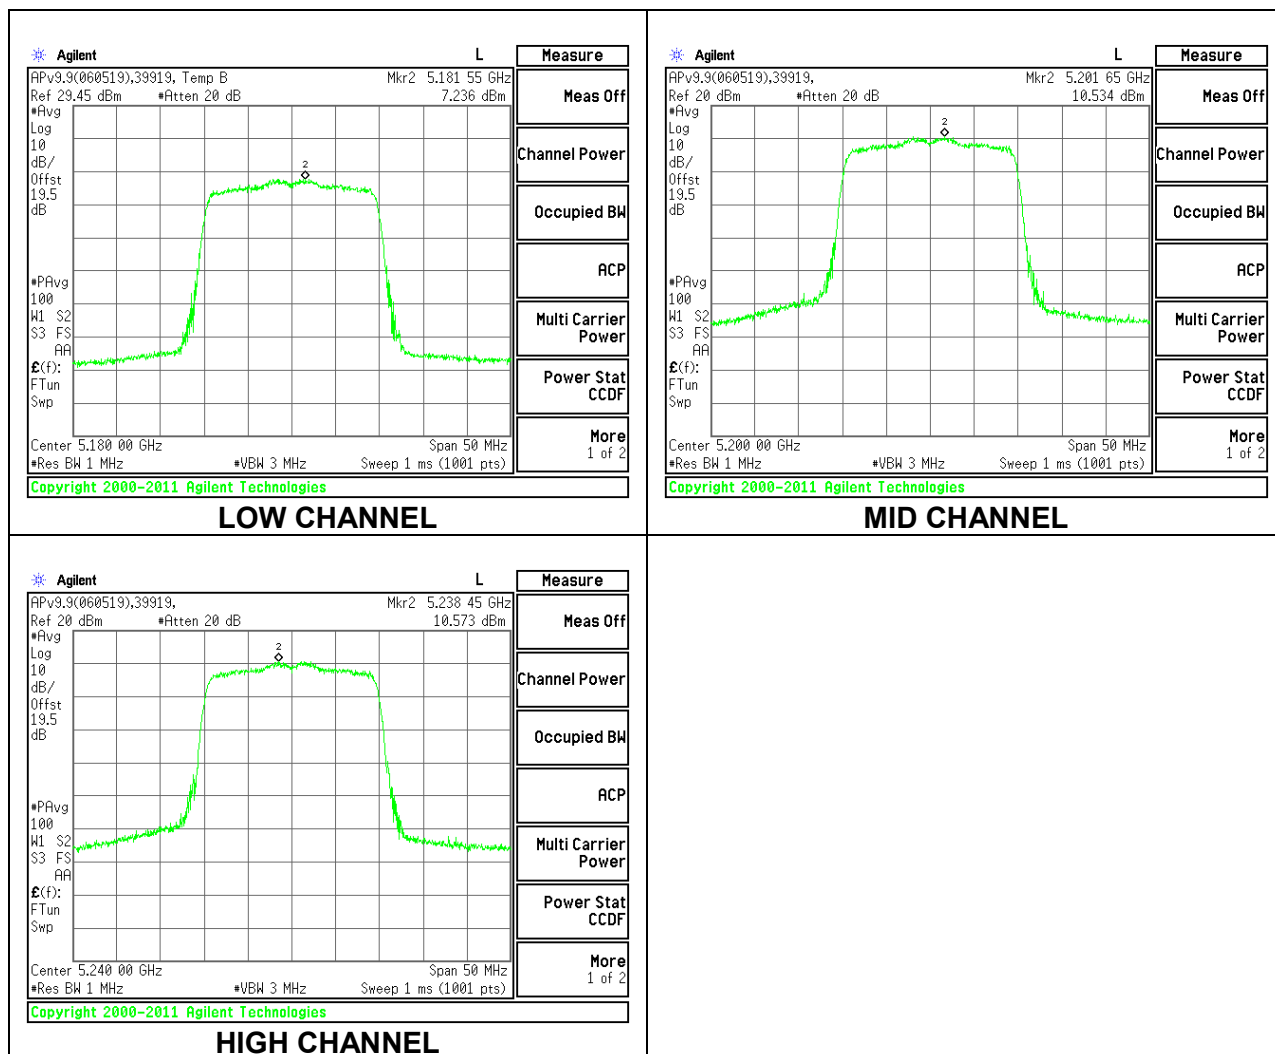

1TX Antenna 6 MODE (FCC) MOBILE – 26 Tones, RU Index 0

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5180	19.95	-4.2
Mid	5200	20.75	-4.2
High	5240	20.60	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	23.00	27.20	24.00	11.00	11.00
Mid	5200	24.00	23.00	27.20	24.00	11.00	11.00
High	5240	24.00	23.00	27.20	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.82	11.82	24.00	-12.18
Mid	5200	11.85	11.85	24.00	-12.15
High	5240	11.90	11.90	24.00	-12.10

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	8.938	8.94	11.00	-2.06
Mid	5200	9.237	9.24	11.00	-1.76
High	5240	9.605	9.61	11.00	-1.40

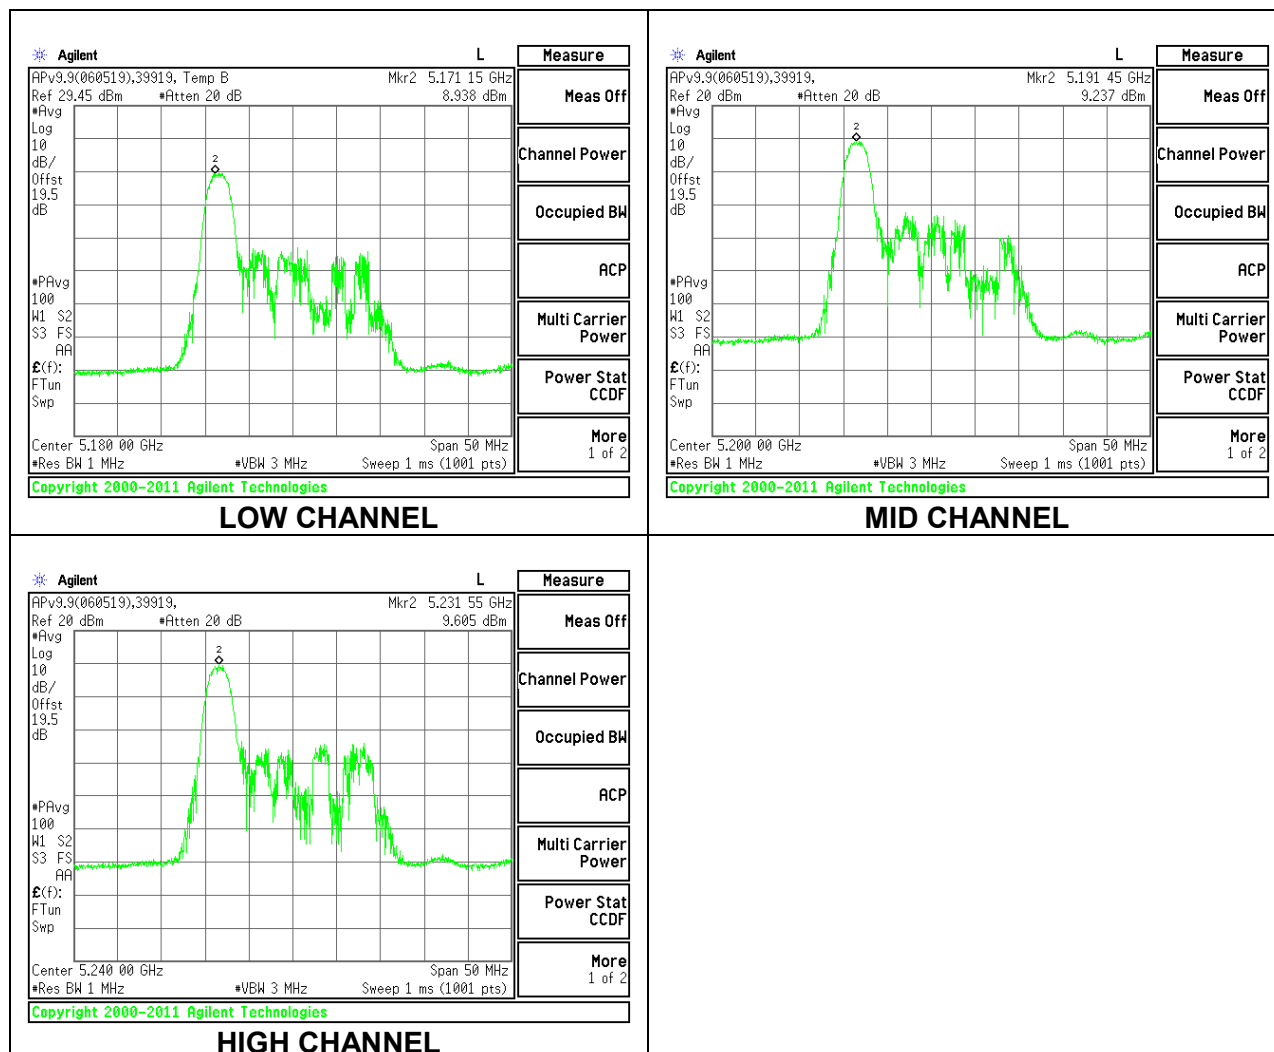

1TX Antenna 6 MODE (FCC) MOBILE – 26 Tones, RU Index 4

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5180	19.15	-4.2
Mid	5200	18.85	-4.2
High	5240	19.70	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	22.82	27.02	24.00	11.00	11.00
Mid	5200	24.00	22.75	26.95	24.00	11.00	11.00
High	5240	24.00	22.94	27.14	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.81	11.81	24.00	-12.19
Mid	5200	11.87	11.87	24.00	-12.13
High	5240	11.77	11.77	24.00	-12.23

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	8.411	8.41	11.00	-2.59
Mid	5200	8.782	8.78	11.00	-2.22
High	5240	7.844	7.84	11.00	-3.16

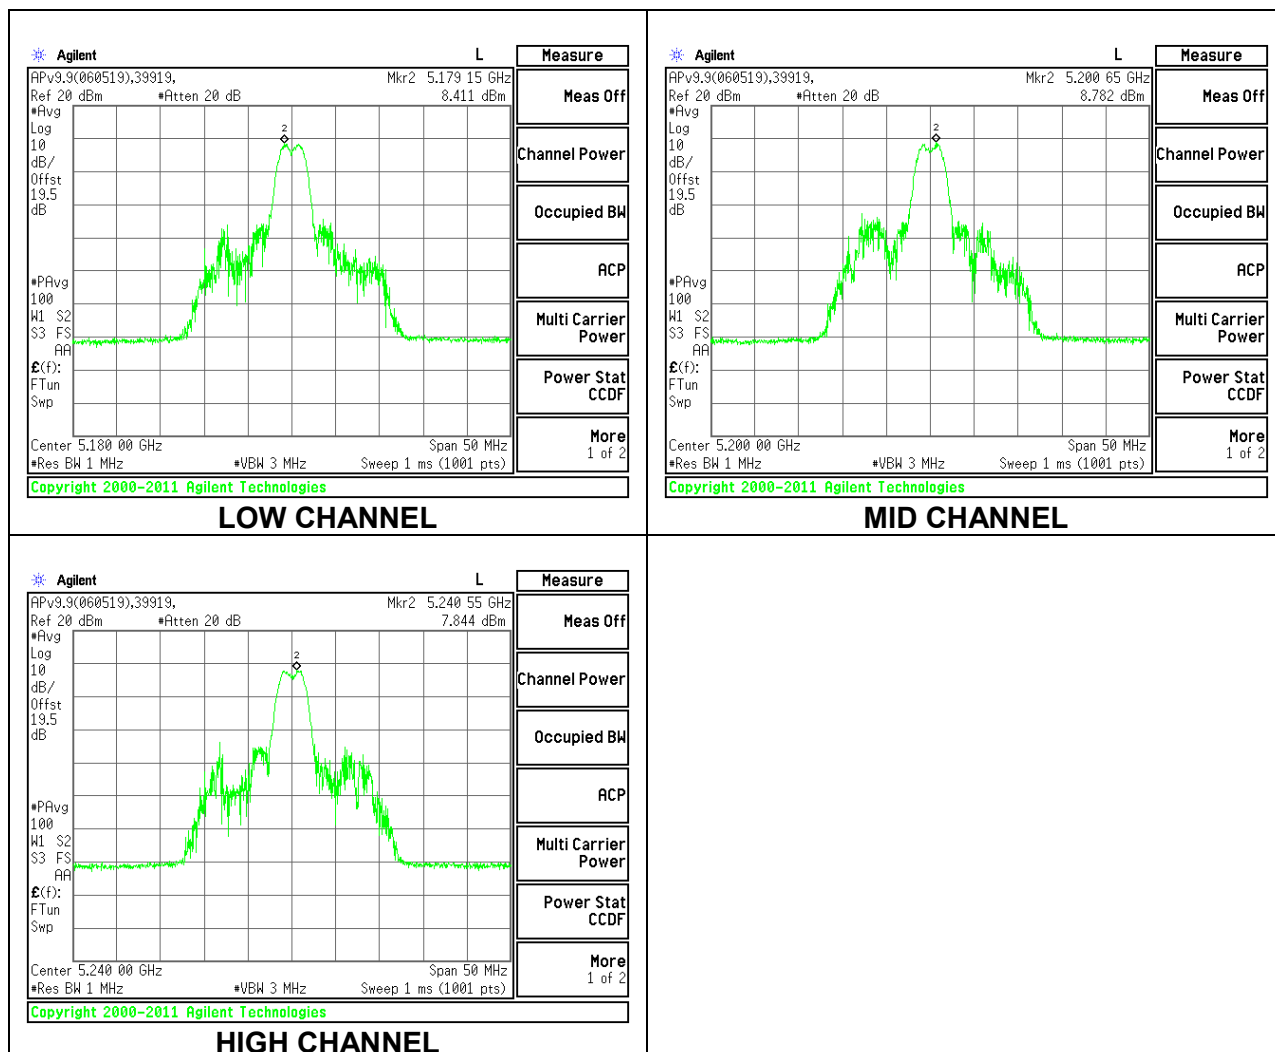

1TX Antenna 6 MODE (FCC) MOBILE – 26 Tones, RU Index 8

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5180	21.75	-4.2
Mid	5200	20.45	-4.2
High	5240	21.15	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	23.00	27.20	24.00	11.00	11.00
Mid	5200	24.00	23.00	27.20	24.00	11.00	11.00
High	5240	24.00	23.00	27.20	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.82	11.82	24.00	-12.18
Mid	5200	11.83	11.83	24.00	-12.17
High	5240	11.94	11.94	24.00	-12.06

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	9.017	9.02	11.00	-1.98
Mid	5200	9.066	9.07	11.00	-1.93
High	5240	9.669	9.67	11.00	-1.33

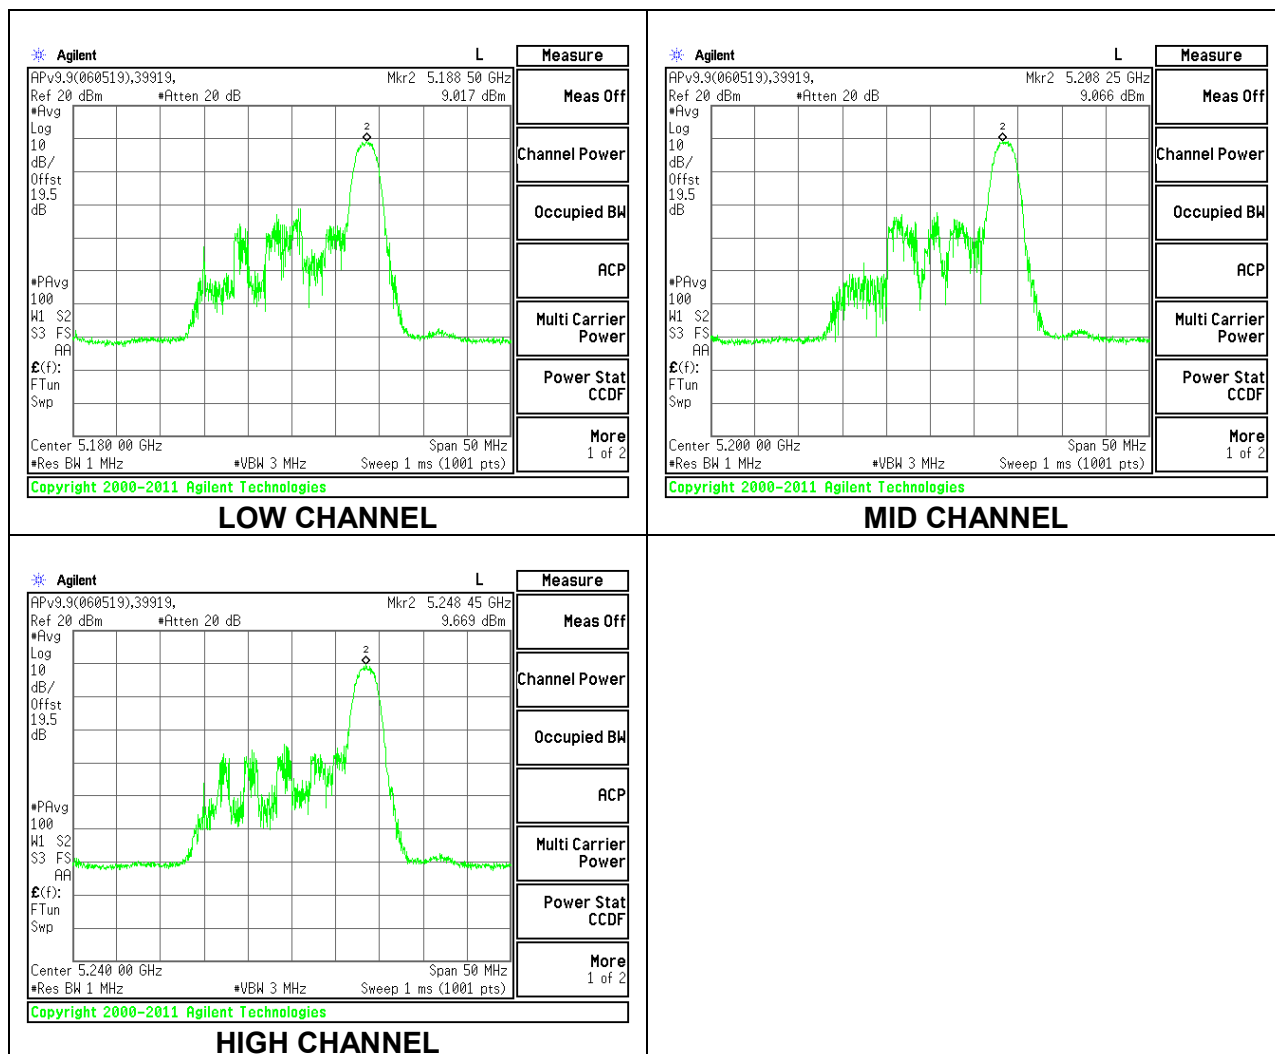

1TX Antenna 5 MODE (FCC) MOBILE – 242 Tones, RU Index 61

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5180	21.75	-10.7
Mid	5200	21.65	-10.7
High	5240	22.15	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	23.00	33.70	24.00	11.00	11.00
Mid	5200	24.00	23.00	33.70	24.00	11.00	11.00
High	5240	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	17.79	17.79	24.00	-6.21
Mid	5200	20.83	20.83	24.00	-3.17
High	5240	20.89	20.89	24.00	-3.11

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	7.391	7.39	11.00	-3.61
Mid	5200	10.212	10.21	11.00	-0.79
High	5240	10.538	10.54	11.00	-0.46

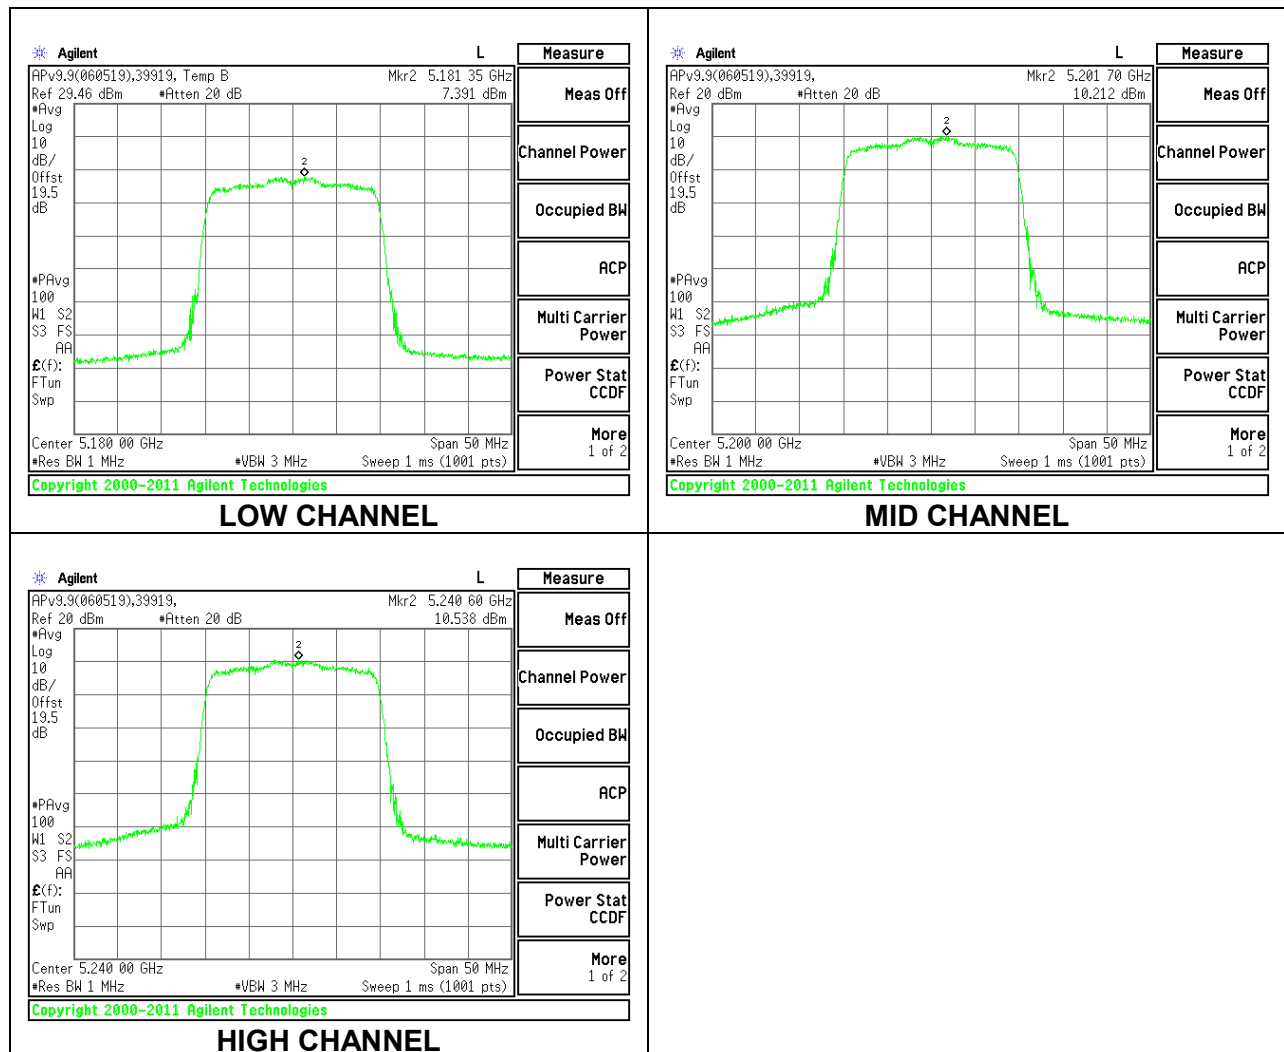

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 0

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5180	19.95	-10.7
Mid	5200	20.10	-10.7
High	5240	21.20	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	23.00	33.70	24.00	11.00	11.00
Mid	5200	24.00	23.00	33.70	24.00	11.00	11.00
High	5240	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.86	11.86	24.00	-12.14
Mid	5200	11.90	11.90	24.00	-12.10
High	5240	11.79	11.79	24.00	-12.21

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	9.200	9.20	11.00	-1.80
Mid	5200	9.372	9.37	11.00	-1.63
High	5240	9.073	9.07	11.00	-1.93

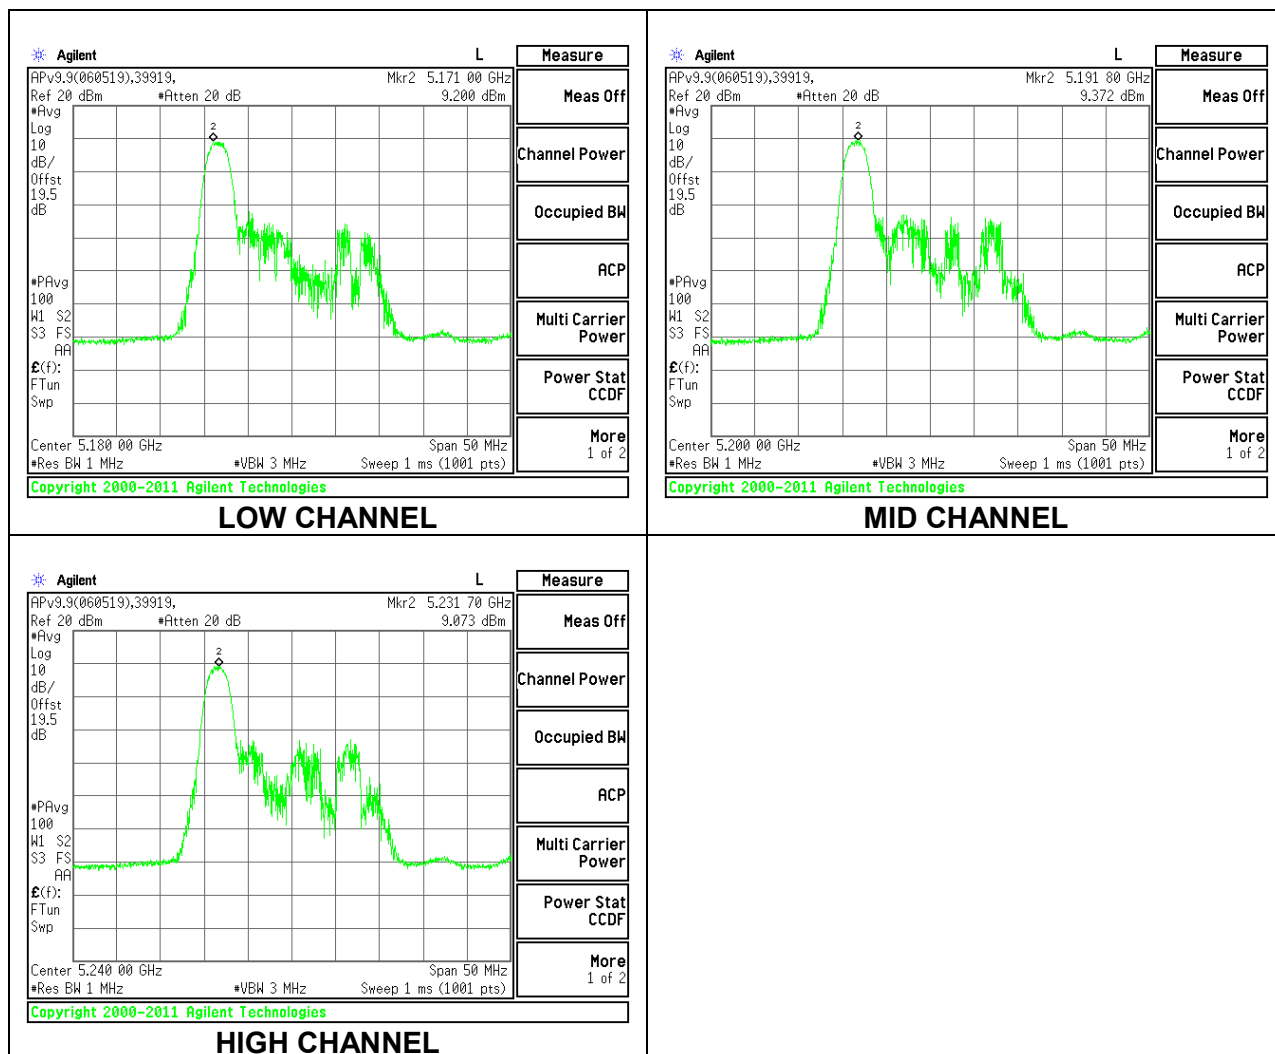

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 4

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5180	19.15	-10.7
Mid	5200	18.80	-10.7
High	5240	19.65	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	22.82	33.52	24.00	11.00	11.00
Mid	5200	24.00	22.74	33.44	24.00	11.00	11.00
High	5240	24.00	22.93	33.63	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.81	11.81	24.00	-12.19
Mid	5200	11.77	11.77	24.00	-12.23
High	5240	11.62	11.62	24.00	-12.38

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	8.829	8.83	11.00	-2.17
Mid	5200	8.693	8.69	11.00	-2.31
High	5240	8.146	8.15	11.00	-2.85

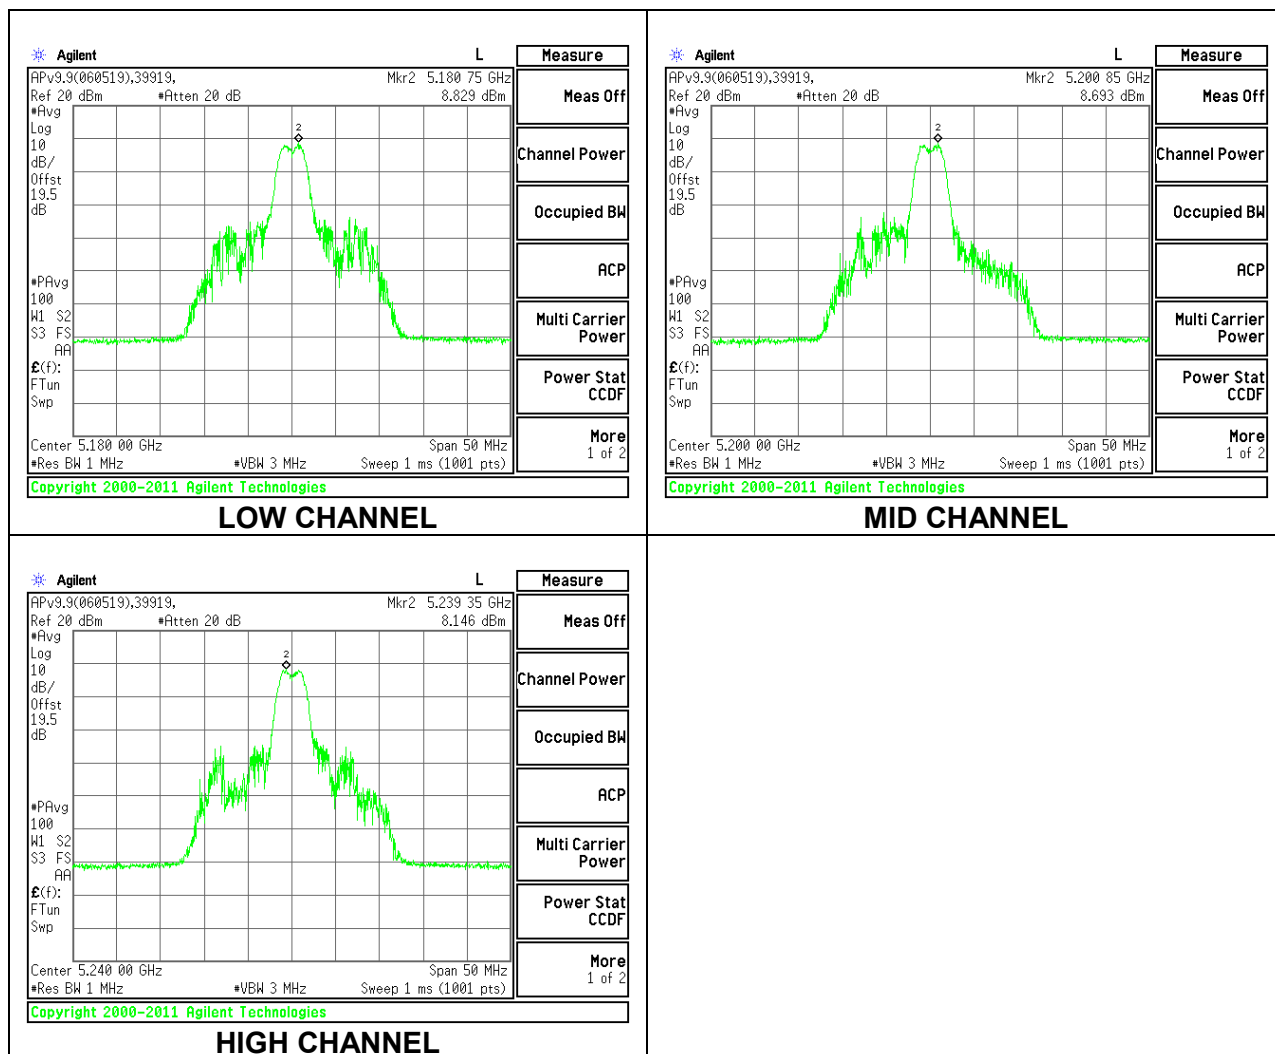

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 8

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5180	21.05	-10.7
Mid	5200	20.60	-10.7
High	5240	21.45	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	23.00	33.70	24.00	11.00	11.00
Mid	5200	24.00	23.00	33.70	24.00	11.00	11.00
High	5240	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.96	11.96	24.00	-12.04
Mid	5200	11.91	11.91	24.00	-12.09
High	5240	11.87	11.87	24.00	-12.13

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	9.505	9.51	11.00	-1.50
Mid	5200	9.374	9.37	11.00	-1.63
High	5240	9.259	9.26	11.00	-1.74

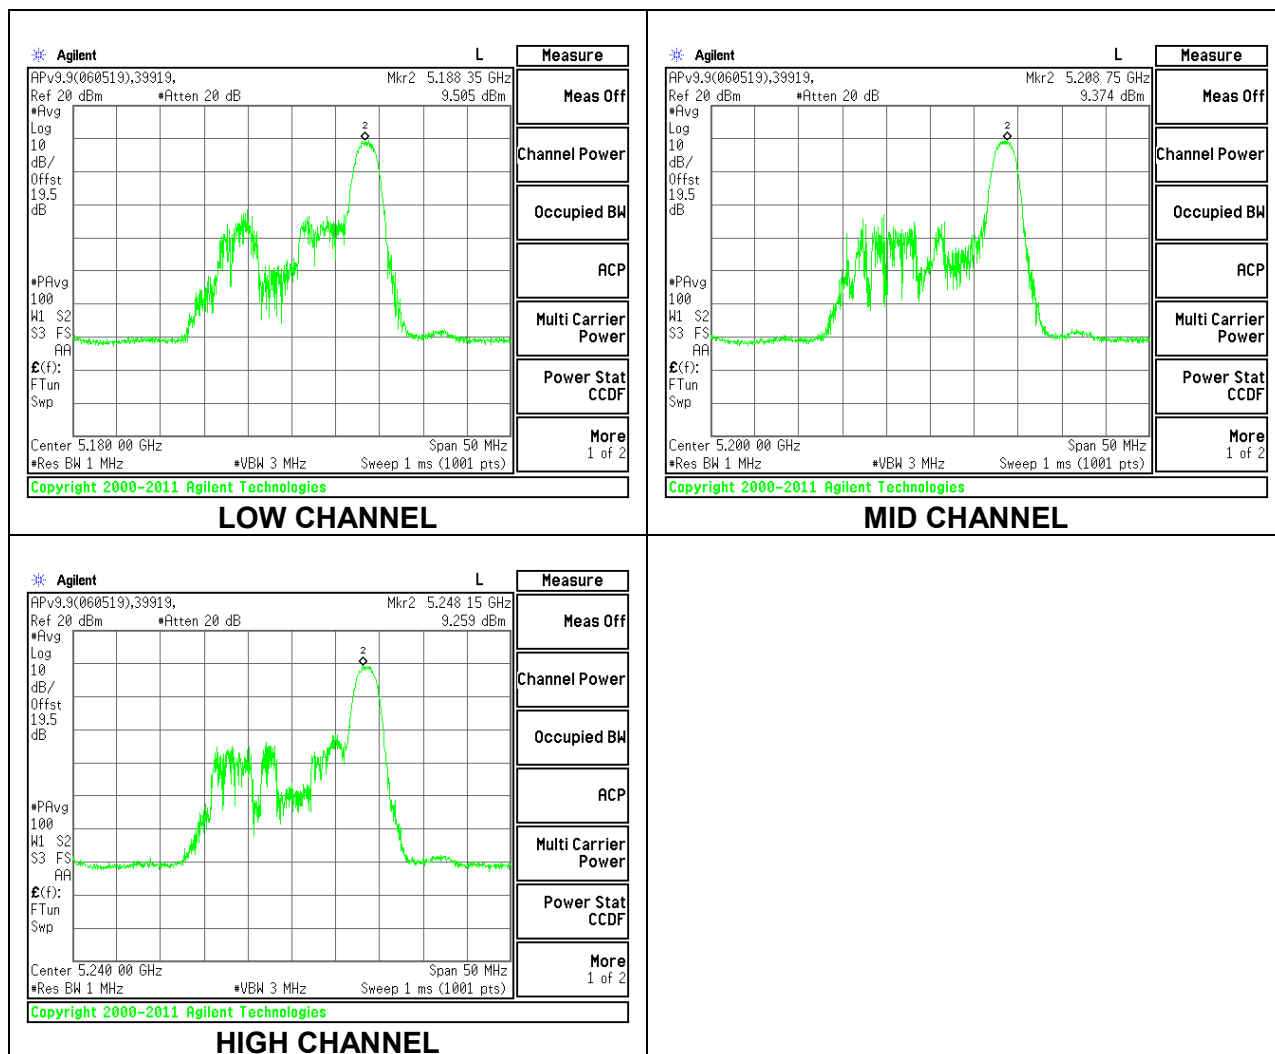

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 242 Tones, RU Index 61

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5180	21.95	-6.33	-3.85
Mid	5200	21.90	-6.33	-3.85
High	5240	21.95	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	23.00	29.33	24.00	11.00	11.00
Mid	5200	24.00	23.00	29.33	24.00	11.00	11.00
High	5240	24.00	23.00	29.33	24.00	11.00	11.00







Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	16.93	16.86	19.91	24.00	-4.09
Mid	5200	17.88	17.96	20.93	24.00	-3.07
High	5240	17.91	17.90	20.92	24.00	-3.08

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	7.028	6.724	9.89	11.00	-1.11
Mid	5200	7.561	8.154	10.88	11.00	-0.12
High	5240	7.627	7.620	10.63	11.00	-0.37

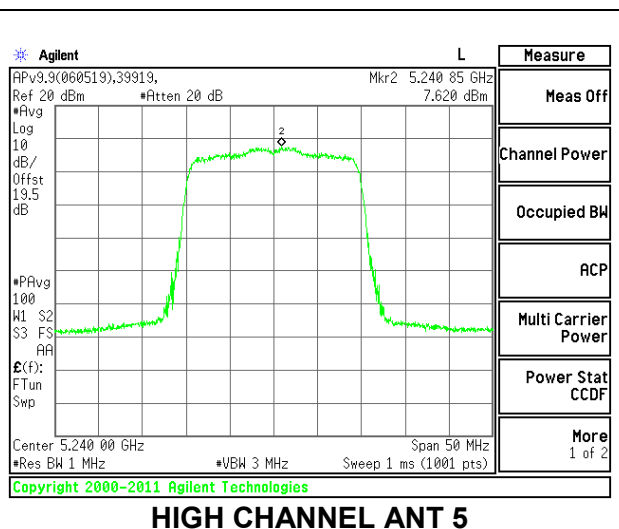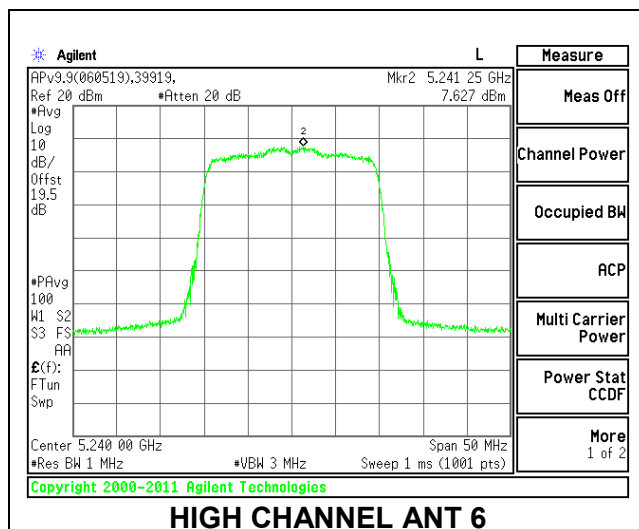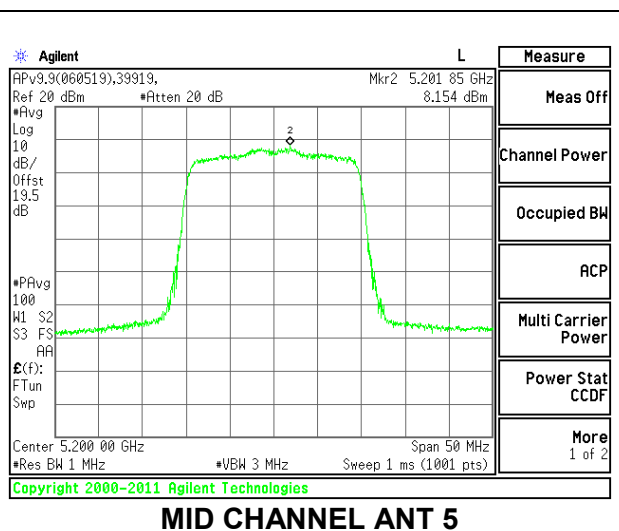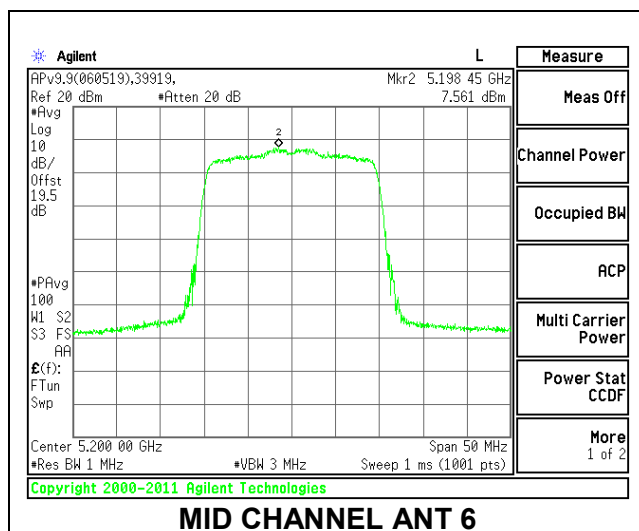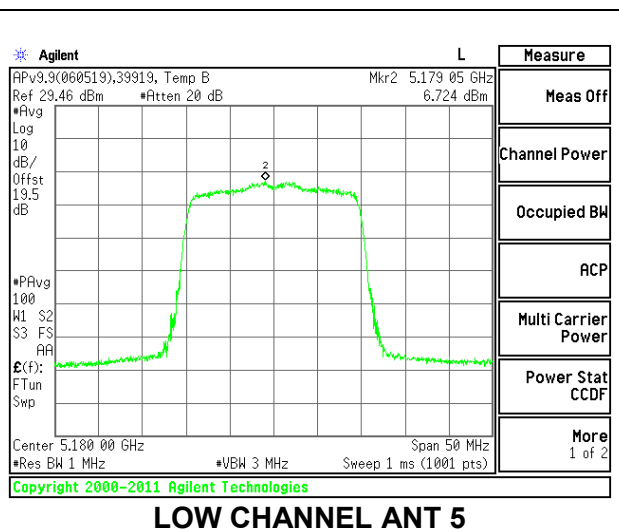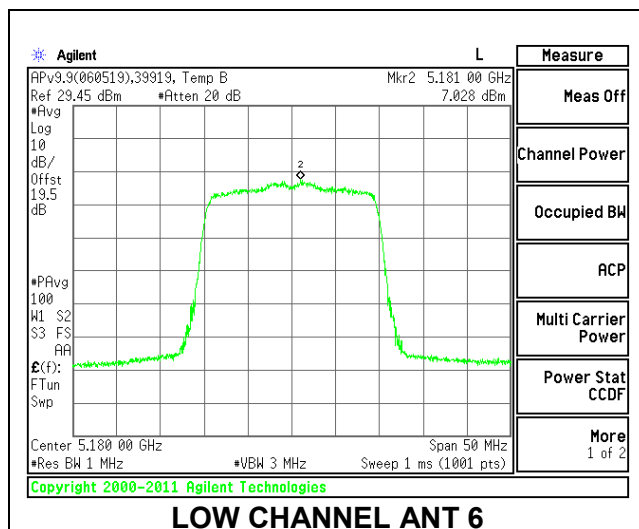

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 0

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5180	20.10	-6.33	-3.85
Mid	5200	20.50	-6.33	-3.85
High	5240	19.85	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	23.00	29.33	24.00	11.00	11.00
Mid	5200	24.00	23.00	29.33	24.00	11.00	11.00
High	5240	24.00	22.98	29.31	24.00	11.00	11.00







Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	8.88	8.74	11.82	24.00	-12.18
Mid	5200	8.77	8.81	11.80	24.00	-12.20
High	5240	8.76	8.92	11.85	24.00	-12.15

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	6.626	6.276	9.46	11.00	-1.54
Mid	5200	6.369	6.434	9.41	11.00	-1.59
High	5240	6.289	6.847	9.59	11.00	-1.41

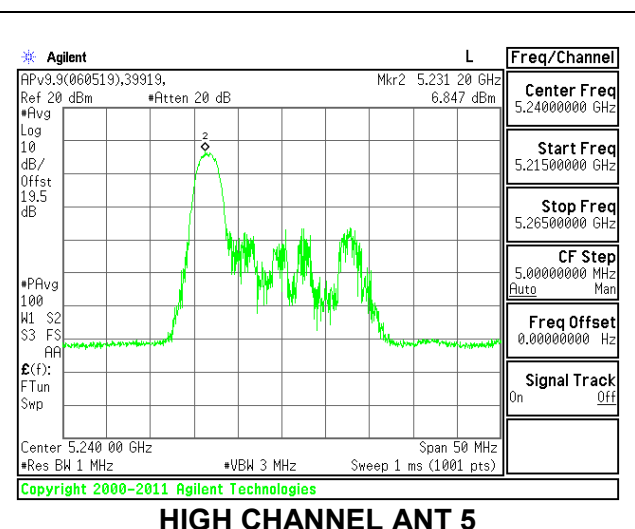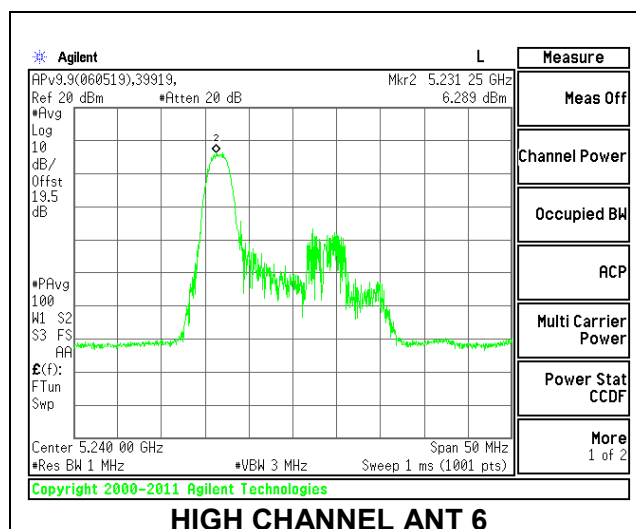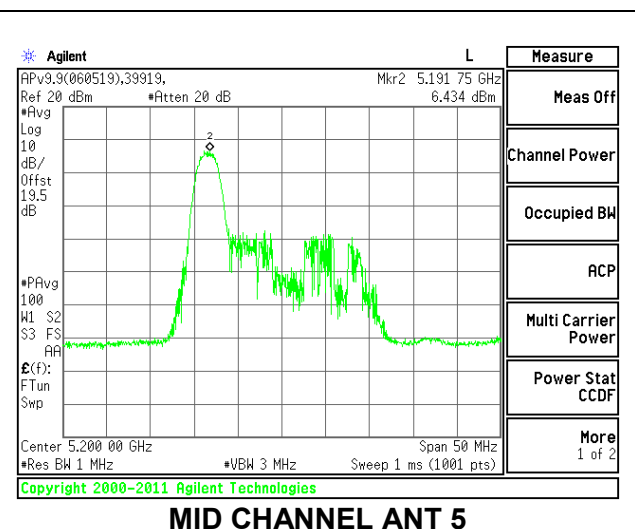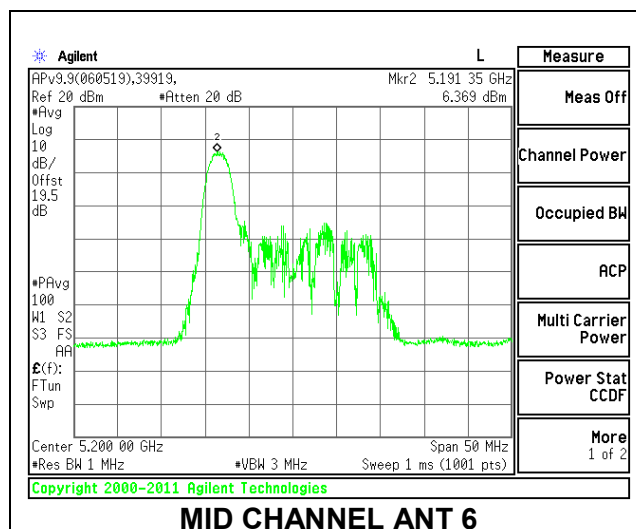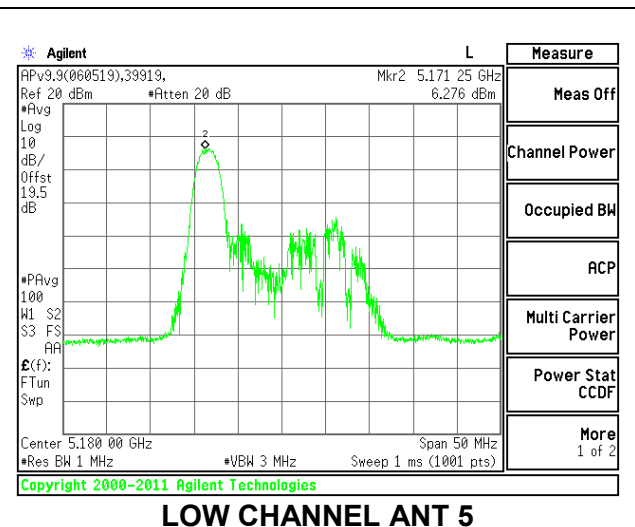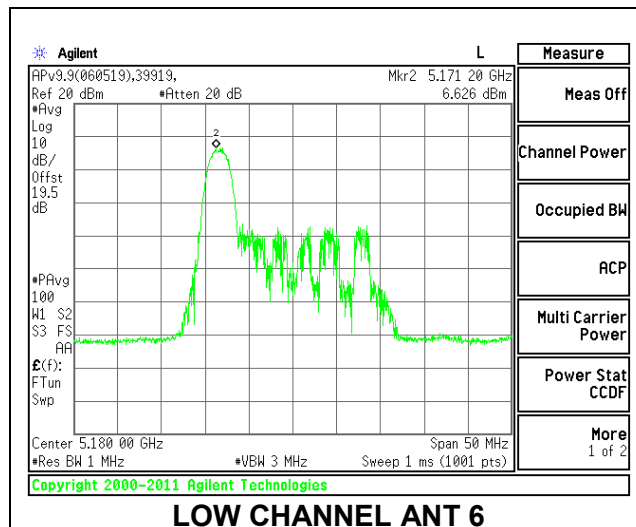

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 4

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5180	18.45	-6.33	-3.85
Mid	5200	19.15	-6.33	-3.85
High	5240	17.70	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	22.66	28.99	24.00	11.00	11.00
Mid	5200	24.00	22.82	29.15	24.00	11.00	11.00
High	5240	24.00	22.48	28.81	24.00	11.00	11.00







Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	8.83	8.72	11.79	24.00	-12.21
Mid	5200	8.87	8.83	11.86	24.00	-12.14
High	5240	8.79	8.78	11.80	24.00	-12.20

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	5.344	5.142	8.25	11.00	-2.75
Mid	5200	5.513	5.342	8.44	11.00	-2.56
High	5240	5.291	5.209	8.26	11.00	-2.74

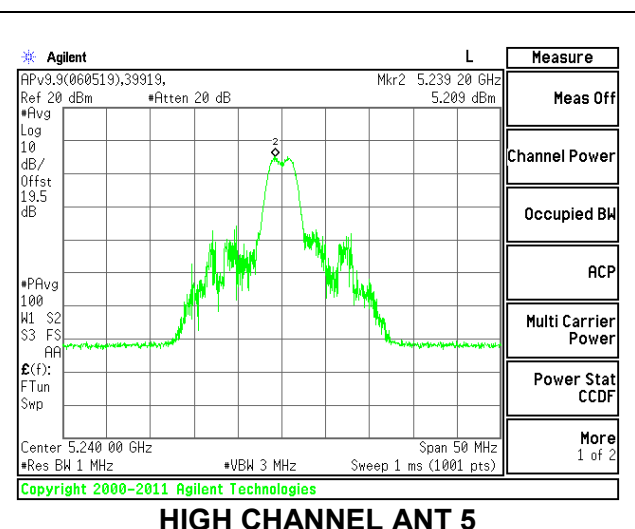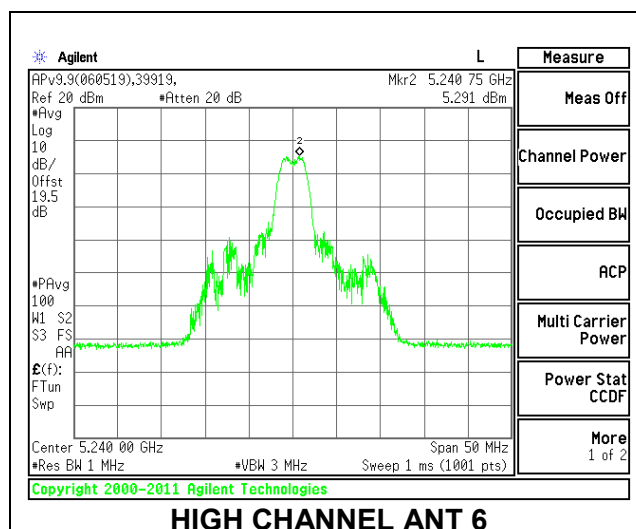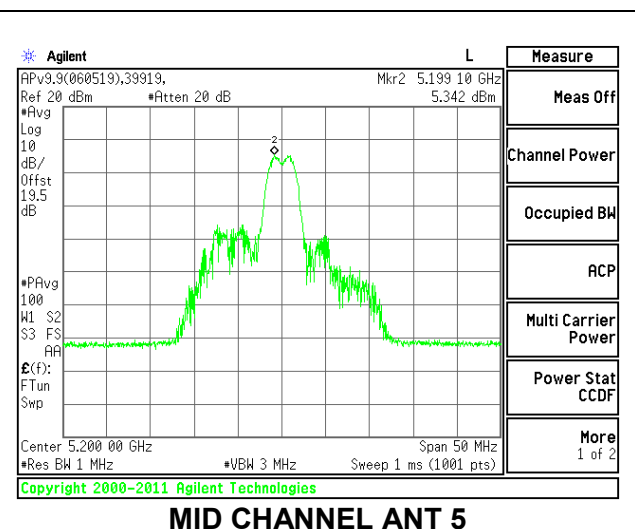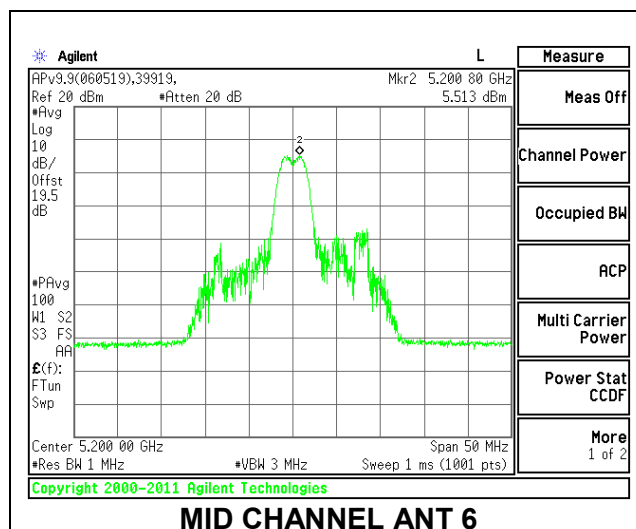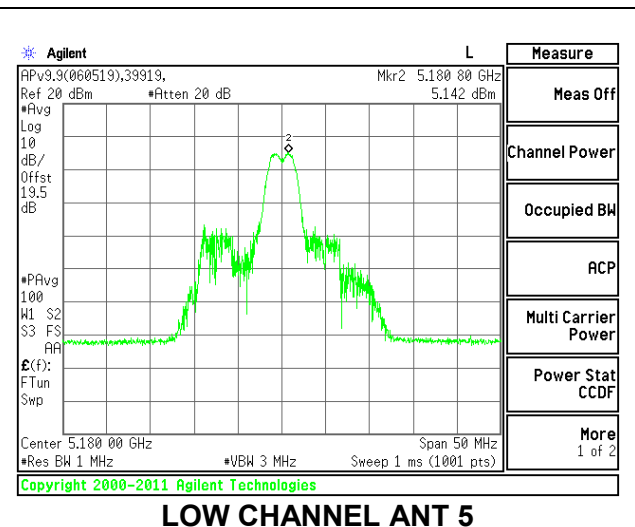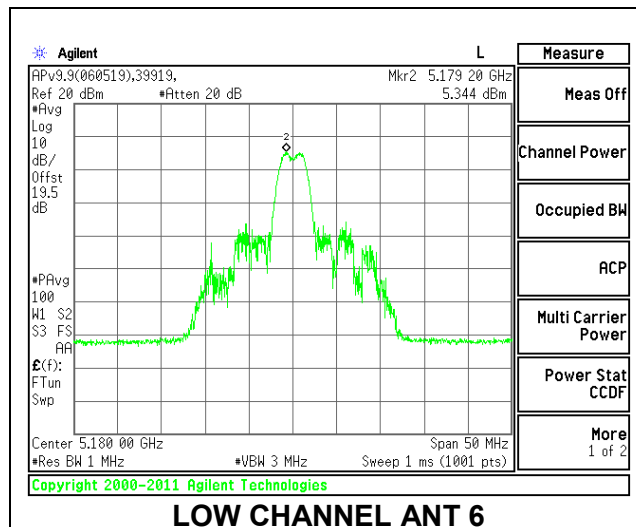

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 8

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5180	20.70	-6.33	-3.85
Mid	5200	20.55	-6.33	-3.85
High	5240	19.90	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	24.00	23.00	29.33	24.00	11.00	11.00
Mid	5200	24.00	23.00	29.33	24.00	11.00	11.00
High	5240	24.00	22.99	29.32	24.00	11.00	11.00







Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	8.80	8.87	11.85	24.00	-12.15
Mid	5200	8.76	8.84	11.81	24.00	-12.19
High	5240	8.79	8.89	11.85	24.00	-12.15

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	6.248	6.423	9.35	11.00	-1.65
Mid	5200	6.160	6.331	9.26	11.00	-1.74
High	5240	6.214	6.523	9.38	11.00	-1.62

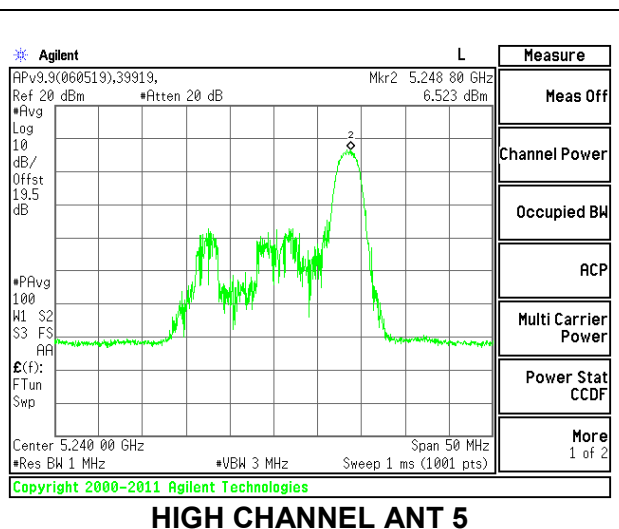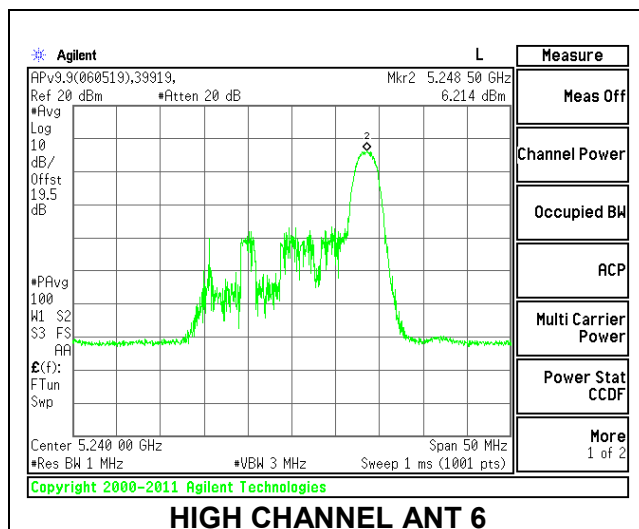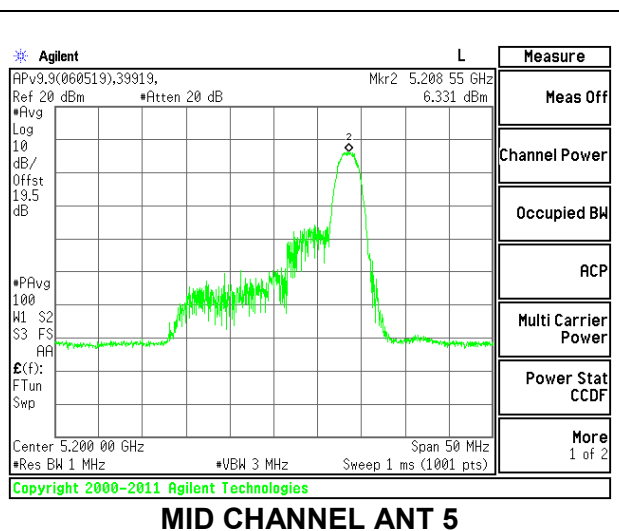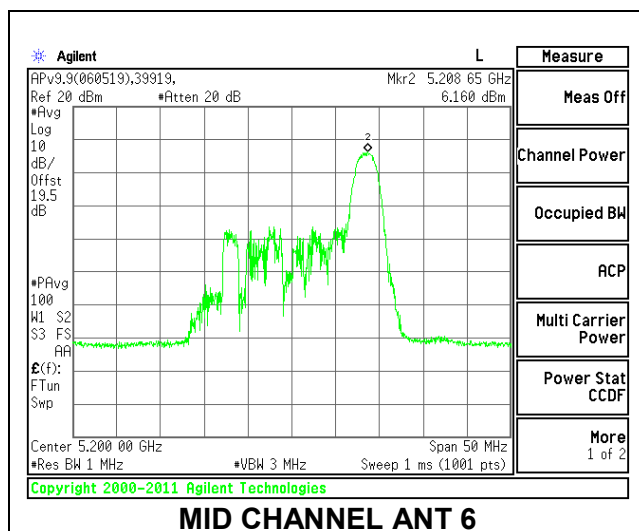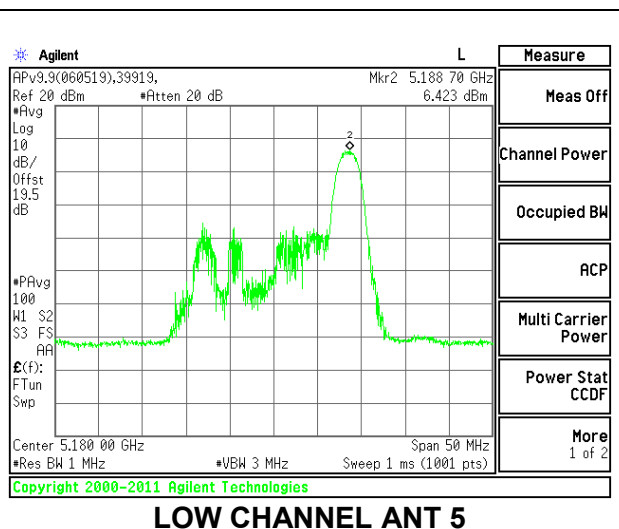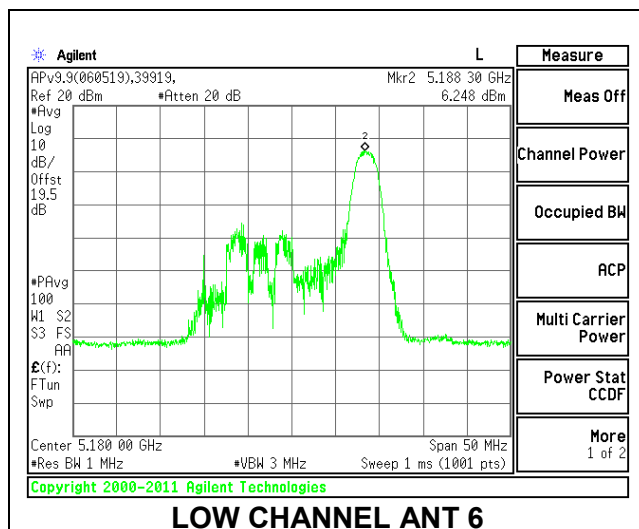

8.5.5. 802.11ax HE40 MODE IN THE 5.2 GHz BAND (FCC)

1TX Antenna 6 MODE (FCC) MOBILE – 484 Tones, RU Index 65

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5190	41.30	-4.2
High	5230	41.10	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	27.20	24.00	11.00	11.00
High	5230	24.00	23.00	27.20	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	15.84	15.84	24.00	-8.16
High	5230	21.37	21.37	24.00	-2.63

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	2.736	2.74	11.00	-8.26
High	5230	8.049	8.05	11.00	-2.95

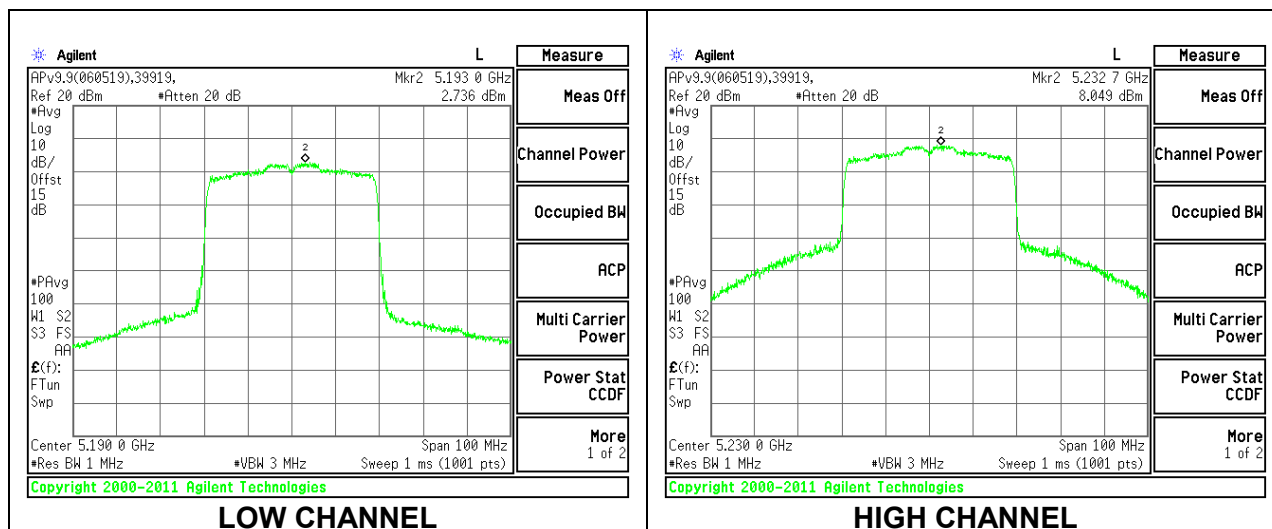

1TX Antenna 6 MODE (FCC) MOBILE – 26 Tones, RU Index 0

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5190	20.20	-4.2
High	5230	20.10	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED eirp PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	27.20	24.00	11.00	10.00	11.00
High	5230	24.00	23.00	27.20	24.00	11.00	10.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.84	11.84	24.00	-12.16
High	5230	11.76	11.76	24.00	-12.24

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	9.380	9.38	11.00	-1.62
High	5230	9.170	9.17	11.00	-1.83

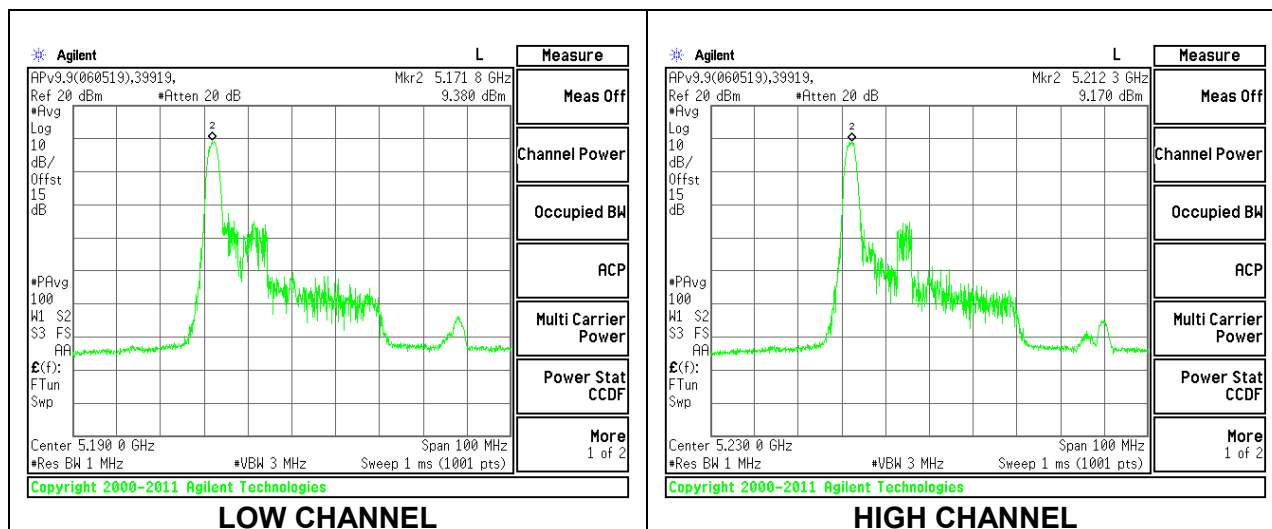

1TX Antenna 6 MODE (FCC) MOBILE – 26 Tones, RU Index 8

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5190	22.70	-4.2
High	5230	22.50	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	27.20	24.00	11.00	11.00
High	5230	24.00	23.00	27.20	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.74	11.74	24.00	-12.26
High	5230	11.77	11.77	24.00	-12.23

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	8.909	8.91	11.00	-2.09
High	5230	9.090	9.09	11.00	-1.91

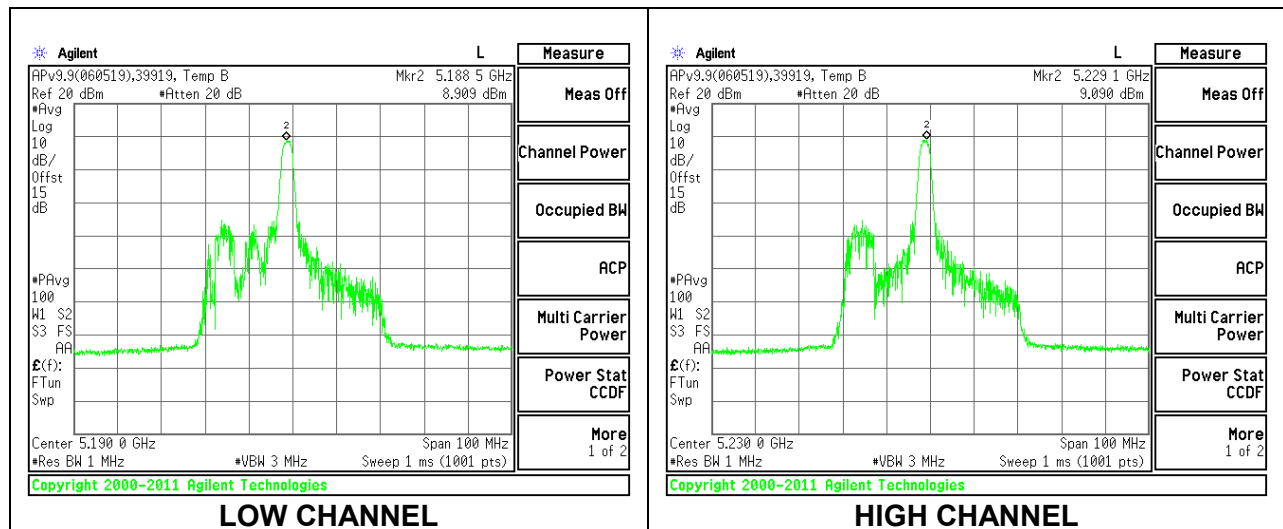

1TX Antenna 6 MODE (FCC) MOBILE – 26 Tones, RU Index 17

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5190	20.60	-4.2
High	5230	19.40	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	27.20	24.00	11.00	11.00
High	5230	24.00	22.88	27.08	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.79	11.79	24.00	-12.21
High	5230	11.81	11.81	24.00	-12.19

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	9.014	9.01	11.00	-1.99
High	5230	9.081	9.08	11.00	-1.92

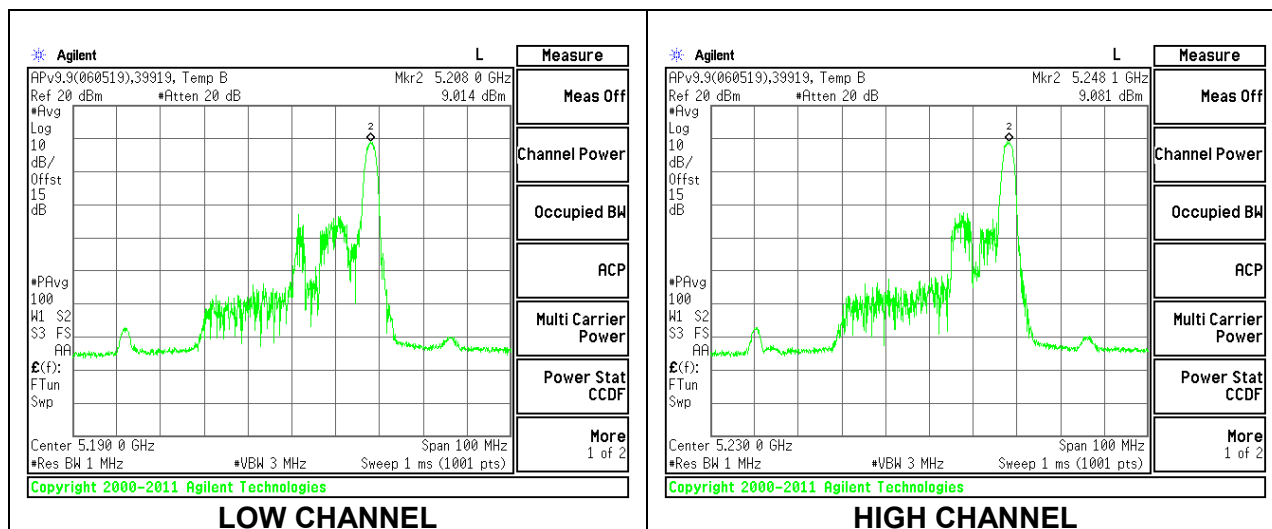

1TX Antenna 5 MODE (FCC) MOBILE – 484 Tones, RU Index 65

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5190	41.50	-10.7
High	5230	41.70	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	33.70	24.00	11.00	11.00
High	5230	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	15.88	15.88	24.00	-8.12
High	5230	21.43	21.43	24.00	-2.57

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	2.851	2.85	11.00	-8.15
High	5230	8.527	8.53	11.00	-2.47

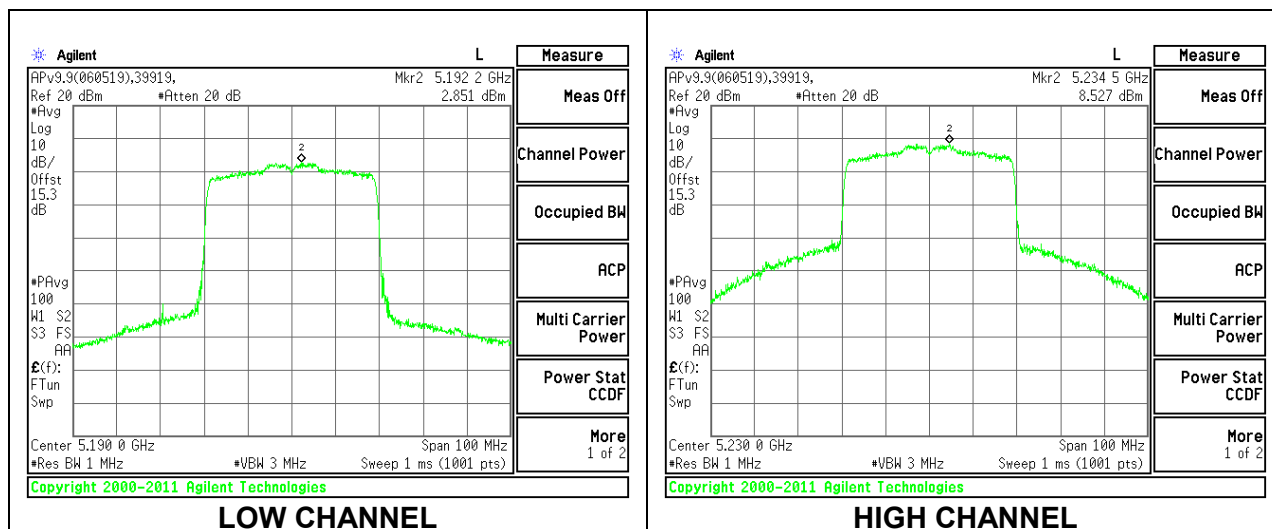

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 0

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5190	19.80	-10.7
High	5230	20.00	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	22.97	33.67	24.00	11.00	11.00
High	5230	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.86	11.86	24.00	-12.14
High	5230	11.92	11.92	24.00	-12.08

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	9.218	9.22	11.00	-1.78
High	5230	9.413	9.41	11.00	-1.59

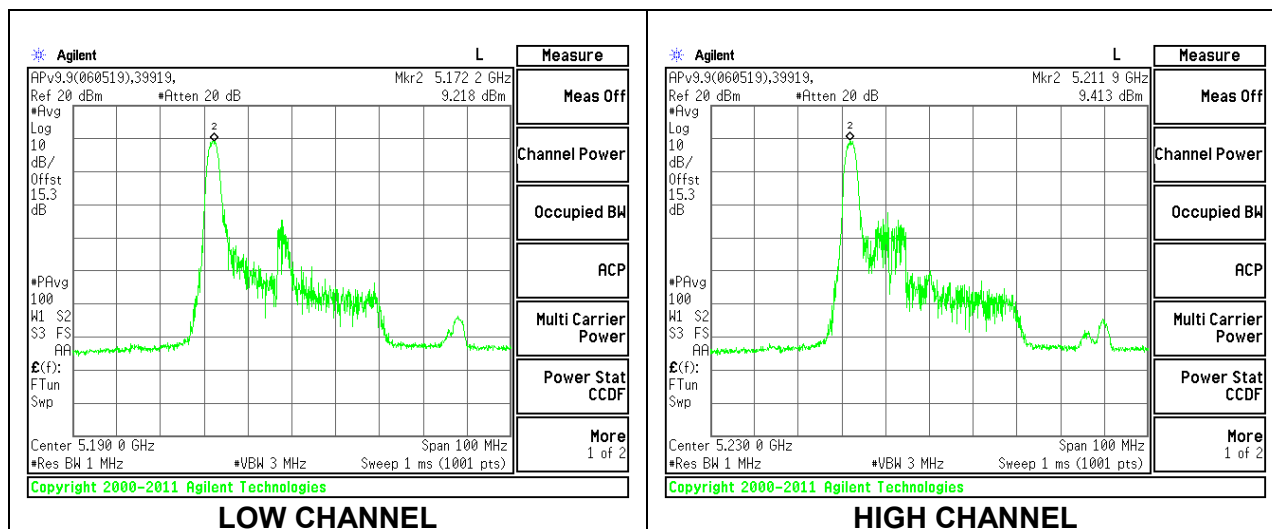

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 8

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5190	22.30	-10.7
High	5230	23.30	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	33.70	24.00	11.00	11.00
High	5230	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.95	11.95	24.00	-12.05
High	5230	11.90	11.90	24.00	-12.10

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	9.556	9.56	11.00	-1.44
High	5230	9.131	9.13	11.00	-1.87

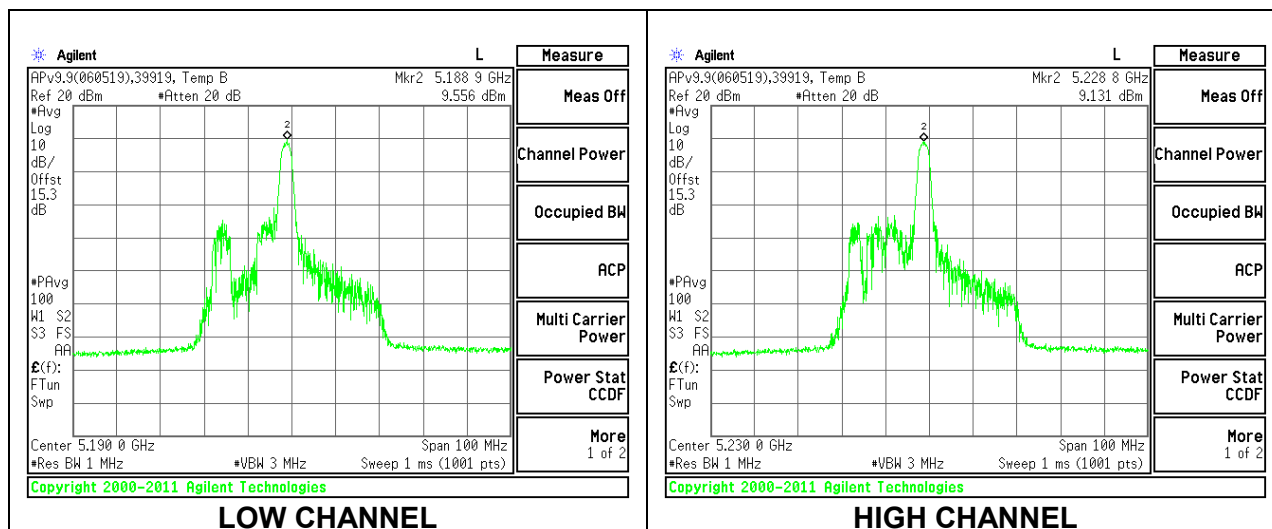

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 17

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Low	5190	20.10	-10.7
High	5230	20.20	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	33.70	24.00	11.00	11.00
High	5230	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.89	11.89	24.00	-12.11
High	5230	11.93	11.93	24.00	-12.07

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	9.228	9.23	11.00	-1.77
High	5230	9.305	9.31	11.00	-1.70

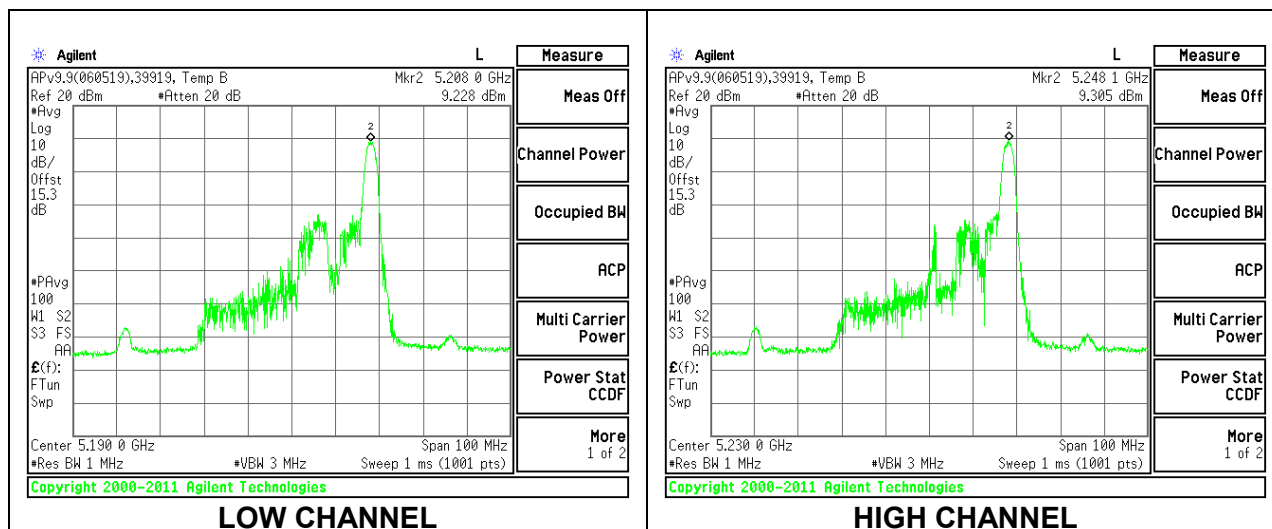

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 484 Tones, RU Index 65

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5190	40.90	-6.33	-3.85
High	5230	40.80	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	29.33	24.00	11.00	11.00
High	5230	24.00	23.00	29.33	24.00	11.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	15.32	15.38	18.36	24.00	-5.64
High	5230	19.87	19.91	22.90	24.00	-1.10

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	2.271	2.518	5.41	11.00	-5.59
High	5230	6.641	6.700	9.68	11.00	-1.32

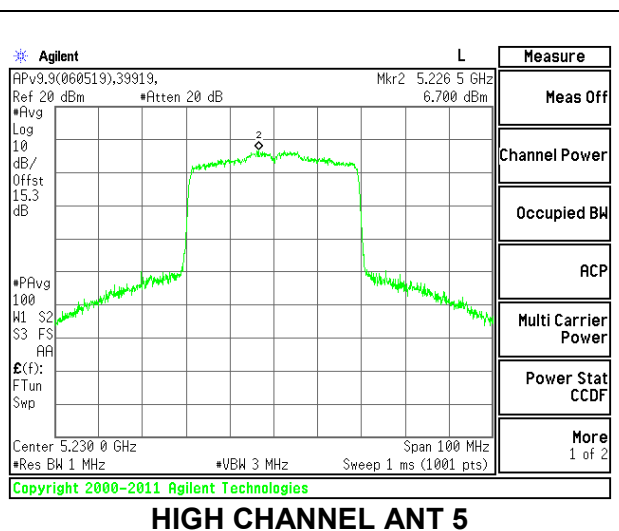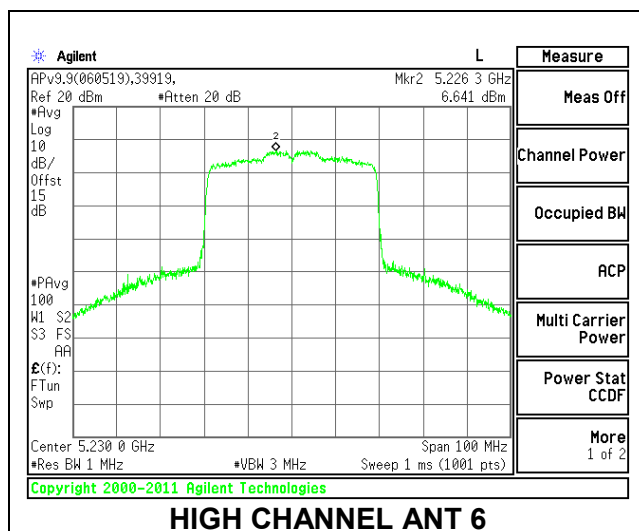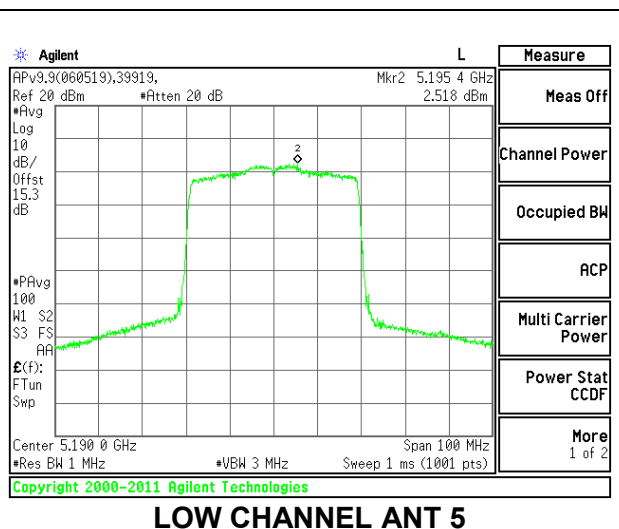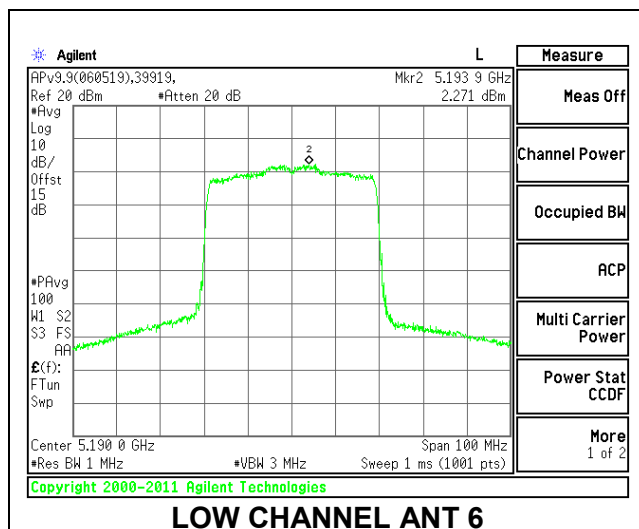

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 0

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5190	19.60	-6.33	-3.85
High	5230	19.50	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	22.92	29.25	24.00	11.00	11.00
High	5230	24.00	22.90	29.23	24.00	11.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	8.79	8.87	11.84	24.00	-12.16
High	5230	8.72	8.81	11.78	24.00	-12.22

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	6.287	6.429	9.37	11.00	-1.63
High	5230	6.235	6.299	9.28	11.00	-1.72

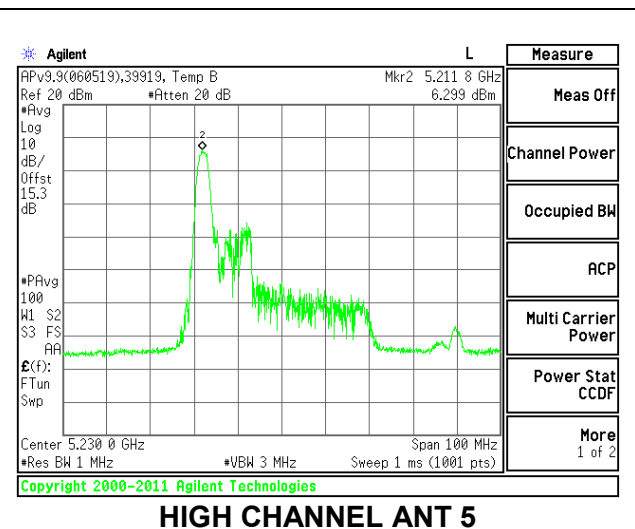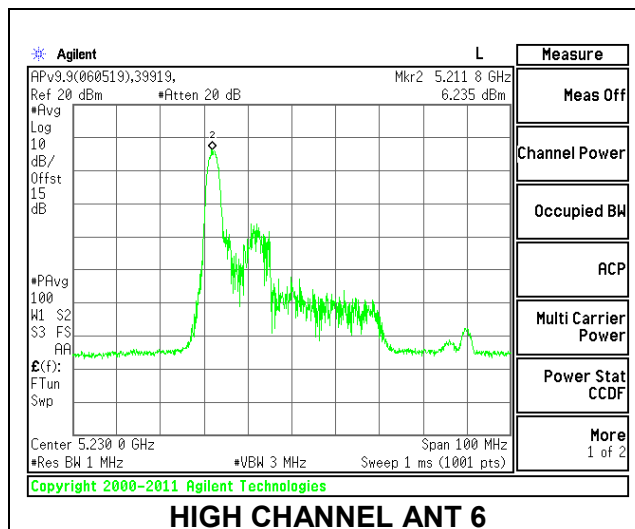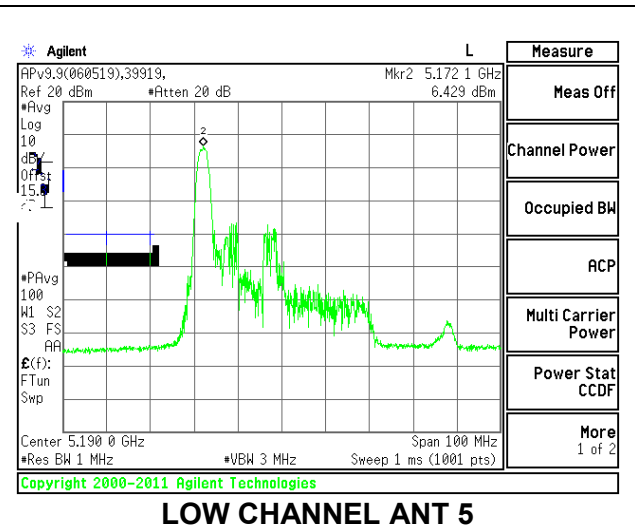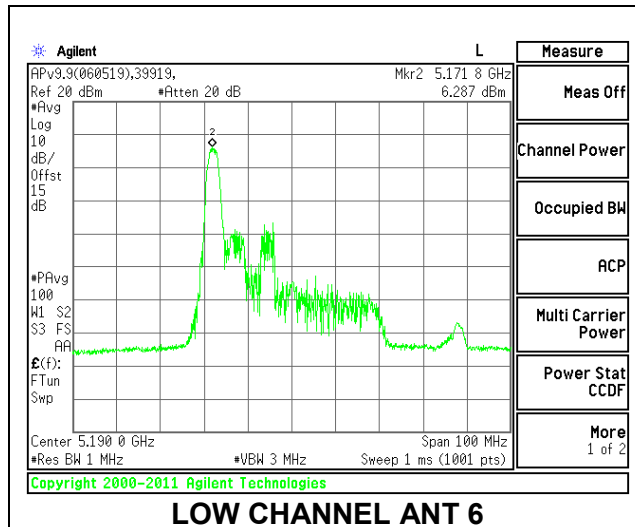

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 8

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5190	21.20	-6.33	-3.85
High	5230	22.40	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	29.33	24.00	11.00	11.00
High	5230	24.00	23.00	29.33	24.00	11.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	8.67	8.93	11.81	24.00	-12.19
High	5230	8.81	8.77	11.80	24.00	-12.20

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	5.939	6.754	9.38	11.00	-1.62
High	5230	6.311	6.233	9.28	11.00	-1.72

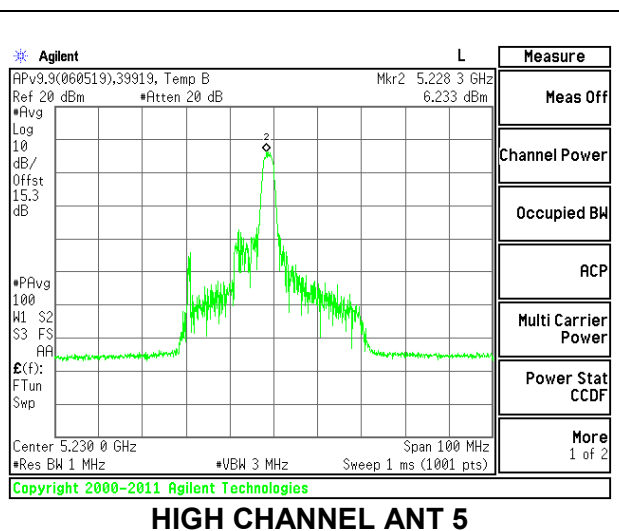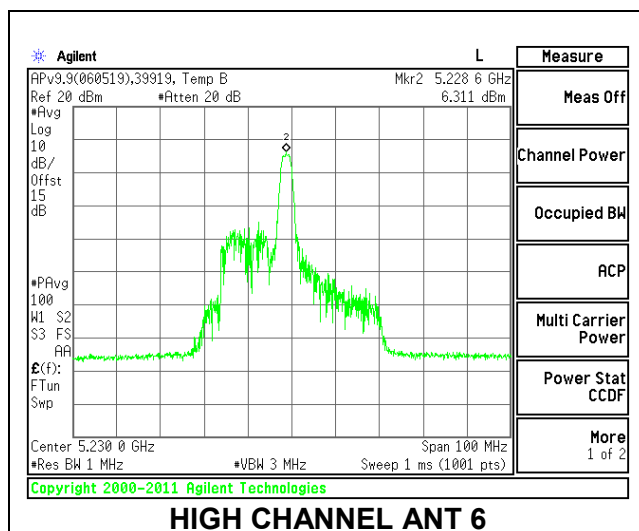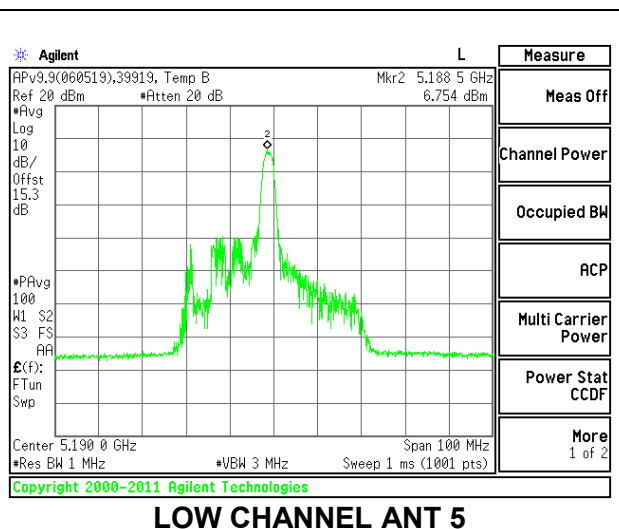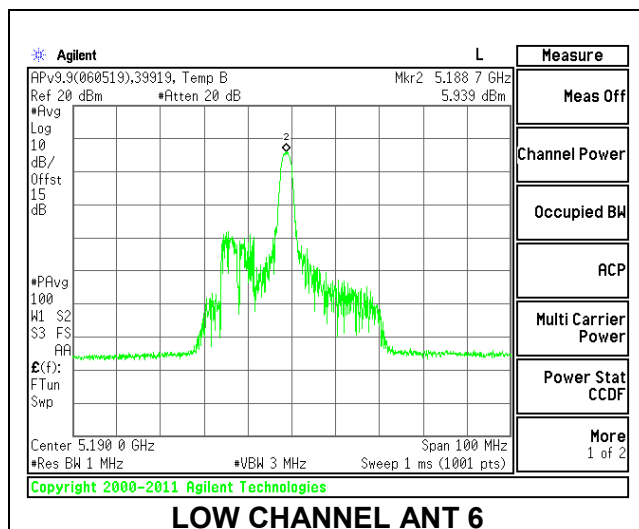

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 17

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5190	19.30	-6.33	-3.85
High	5230	19.40	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	24.00	22.86	29.19	24.00	11.00	11.00
High	5230	24.00	22.88	29.21	24.00	11.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	8.64	8.63	11.65	24.00	-12.35
High	5230	8.77	8.59	11.69	24.00	-12.31

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	6.089	6.075	9.09	11.00	-1.91
High	5230	6.401	5.590	9.02	11.00	-1.98

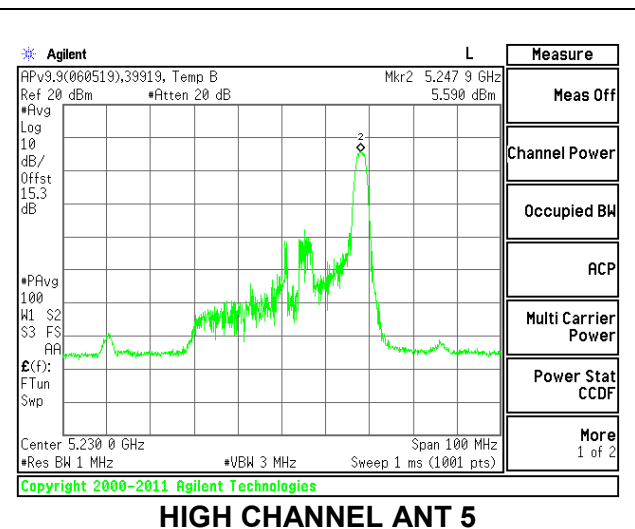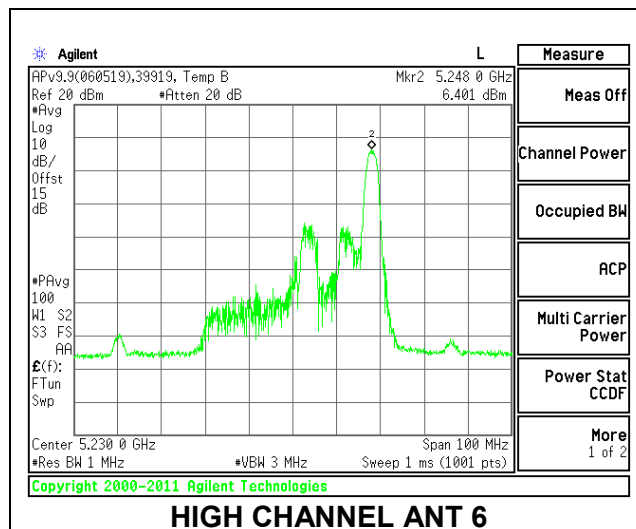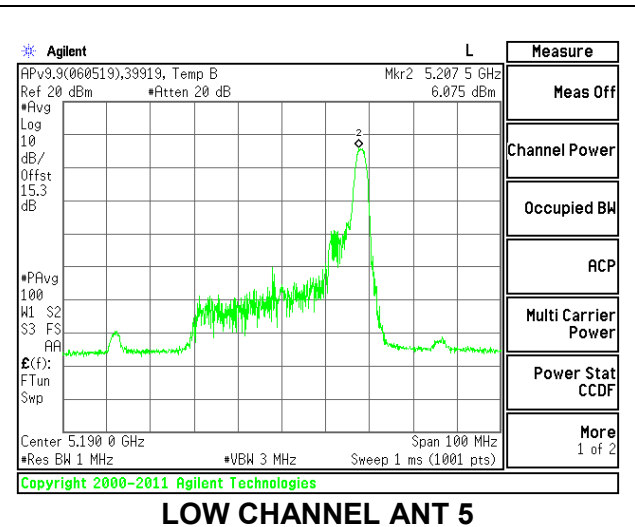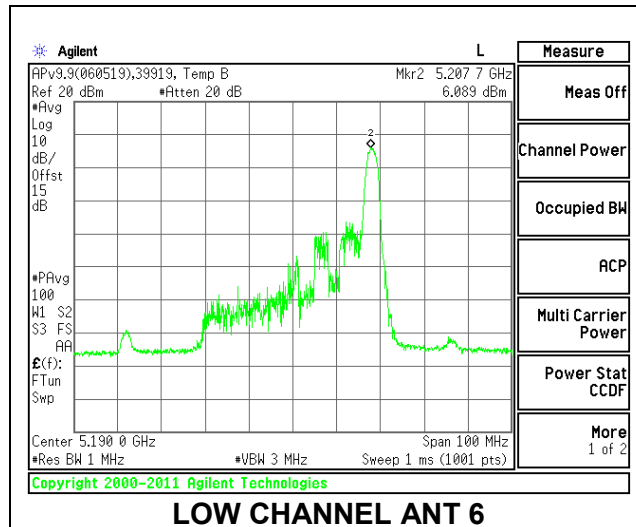

8.5.6. 802.11ax HE80 MODE IN THE 5.2 GHz BAND (FCC)

1TX Antenna 6 MODE (FCC) MOBILE – 996 Tones, RU Index 67

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Mid	5210	86.40	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	27.20	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	15.78	15.78	24.00	-8.22

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	-0.816	-0.82	11.00	-11.82

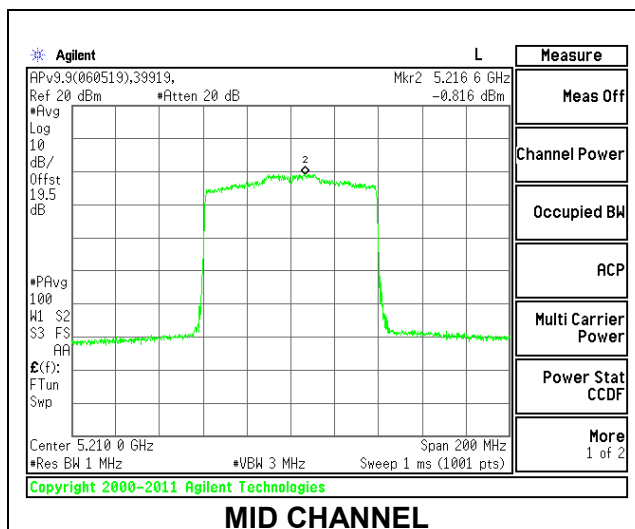

1TX Antenna 6 MODE (FCC) MOBILE – 26 Tones, RU Index 0

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Mid	5210	19.80	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	22.97	27.17	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.90	11.90	24.00	-12.10

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	9.158	9.16	11.00	-1.84

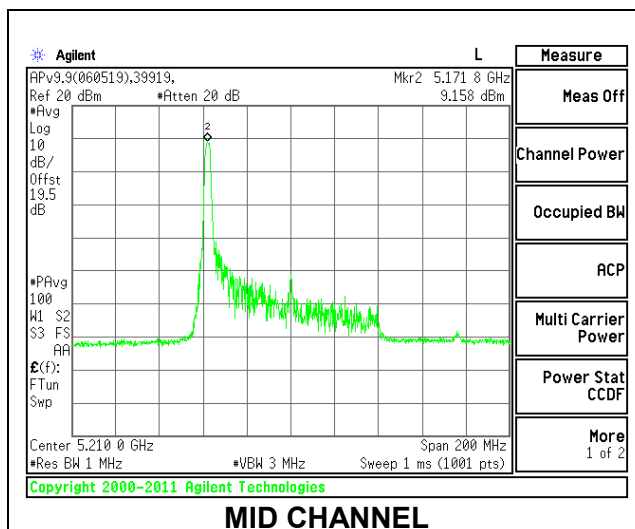

1TX Antenna 6 MODE (FCC) MOBILE – 26 Tones, RU Index 18

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Mid	5210	41.20	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	27.20	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.59	11.59	24.00	-12.41

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	7.485	7.49	11.00	-3.52

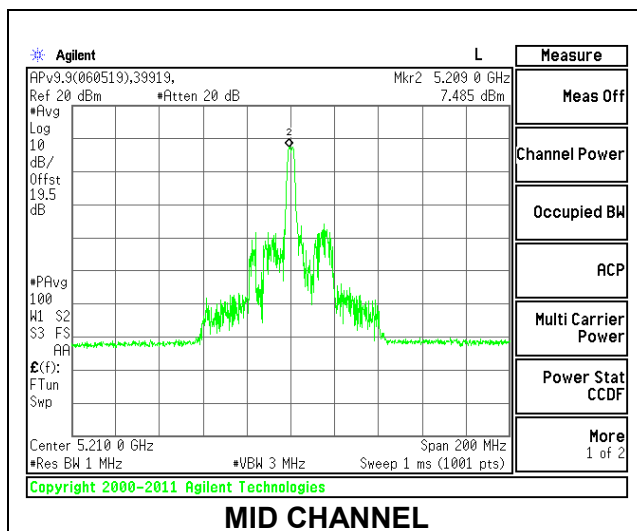

1TX Antenna 6 MODE (FCC) MOBILE – 26 Tones, RU Index 36

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Mid	5210	21.20	-4.2

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	27.20	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.81	11.81	24.00	-12.19

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	8.928	8.93	11.00	-2.07

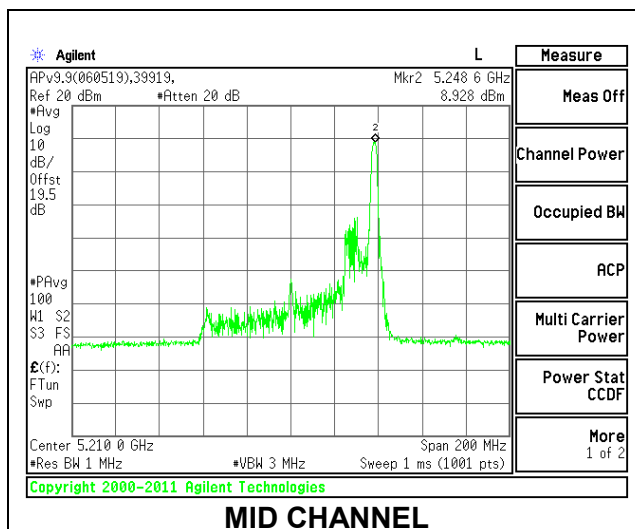

1TX Antenna 5 MODE (FCC) MOBILE – 996 Tones, RU Index 67

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Mid	5210	84.20	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	15.78	15.78	24.00	-8.22

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	-0.541	-0.54	11.00	-11.54

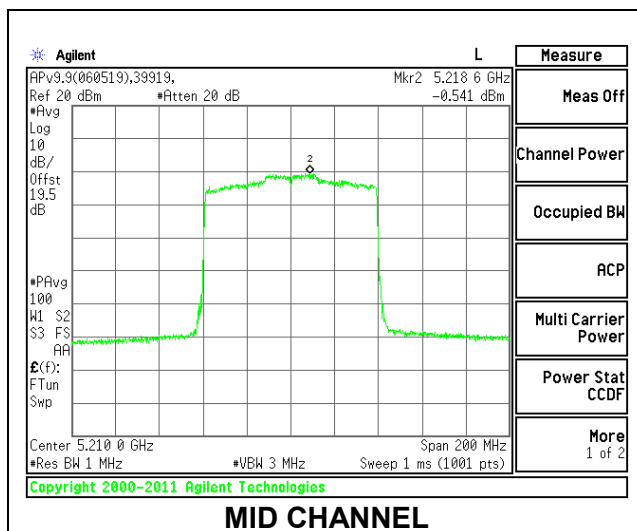

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 0

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Mid	5210	20.00	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.87	11.87	24.00	-12.13

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	8.979	8.98	11.00	-2.02

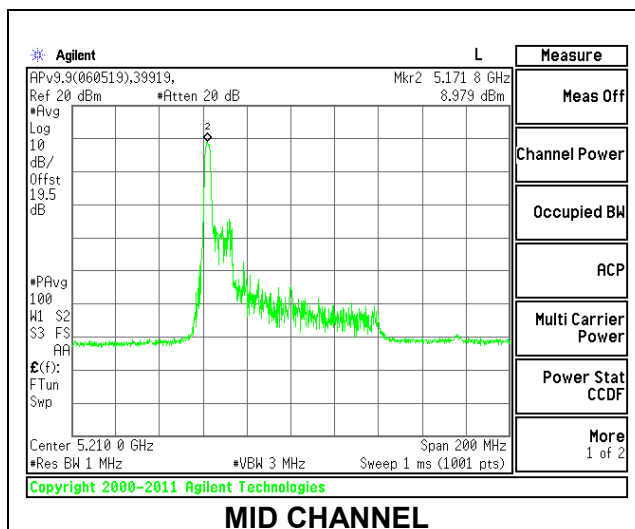

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 18

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Mid	5210	40.40	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.74	11.74	24.00	-12.26

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	8.637	8.64	11.00	-2.36

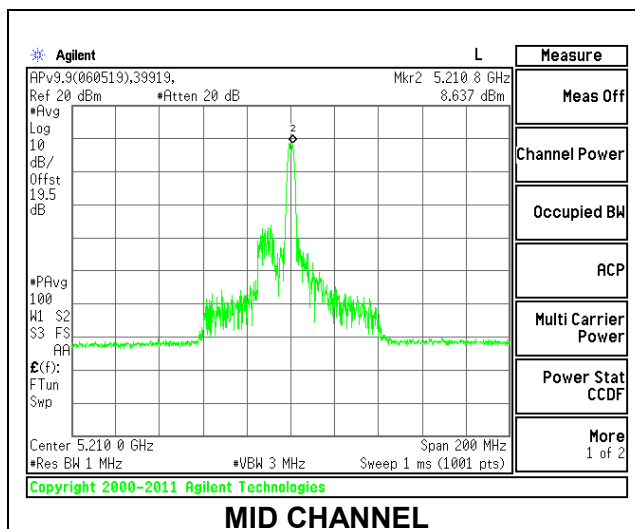

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 36

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)
Mid	5210	21.60	-10.7

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	33.70	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.89	11.89	24.00	-12.11

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	9.139	9.14	11.00	-1.86

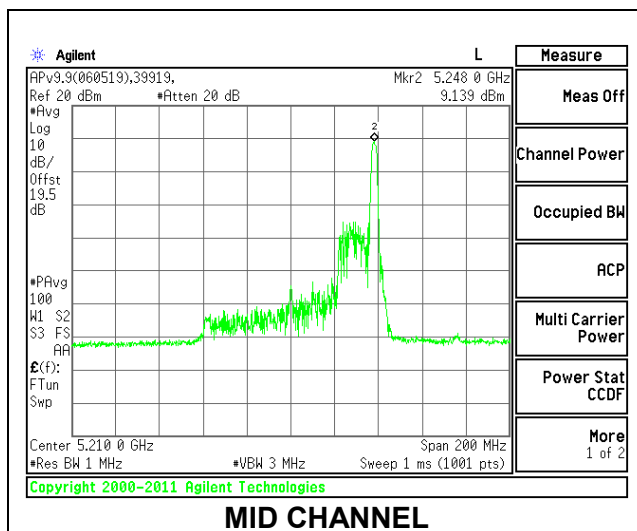

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 996 Tones, RU Index 67

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Mid	5210	83.80	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	29.33	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	14.84	14.89	17.88	24.00	-6.12

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	-1.504	-1.378	1.57	11.00	-9.43

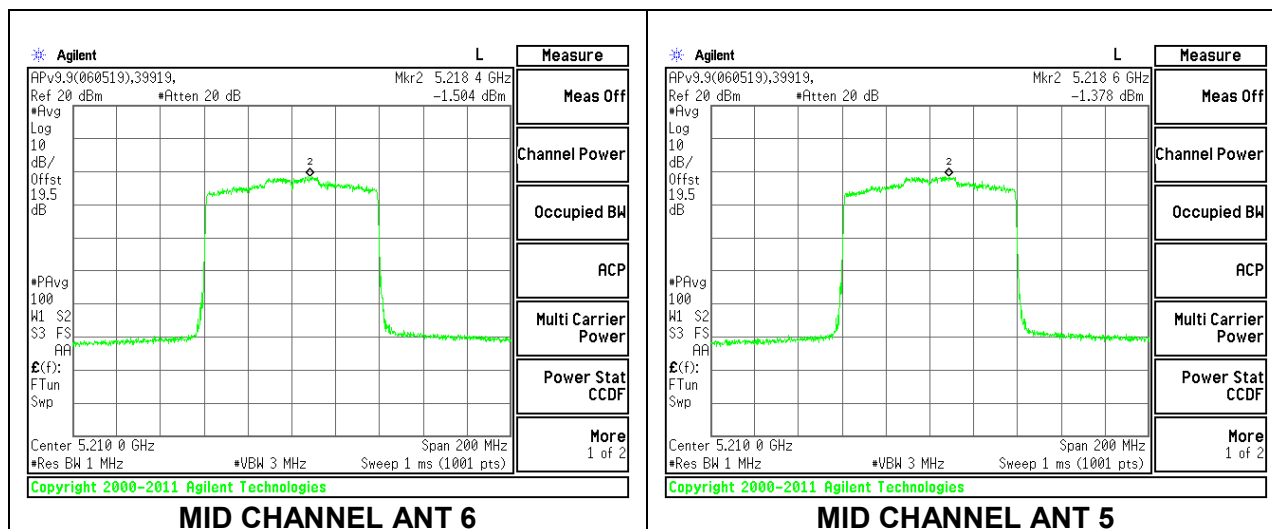

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 0

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Mid	5210	20.20	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	29.33	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	8.85	8.83	11.85	24.00	-12.15

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	6.399	6.308	9.36	11.00	-1.64

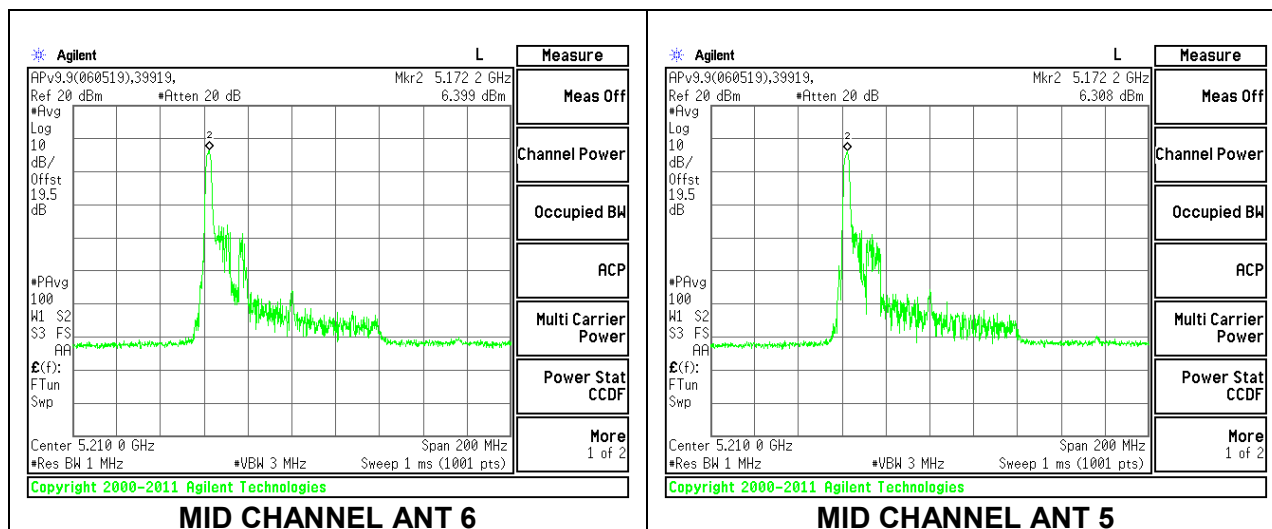

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 18

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Mid	5210	41.00	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	29.33	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	8.70	8.75	11.74	24.00	-12.26

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	4.481	5.004	7.76	11.00	-3.24

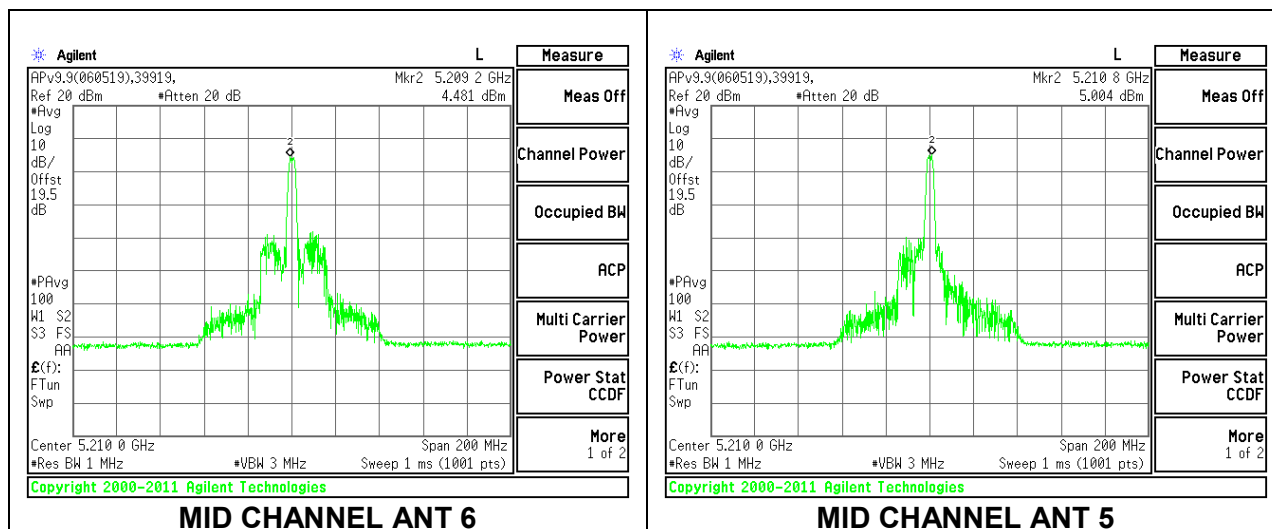

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 36

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Mid	5210	21.20	-6.33	-3.85

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	29.33	24.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	8.88	8.86	11.88	24.00	-12.12

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	6.006	5.909	8.97	11.00	-2.03

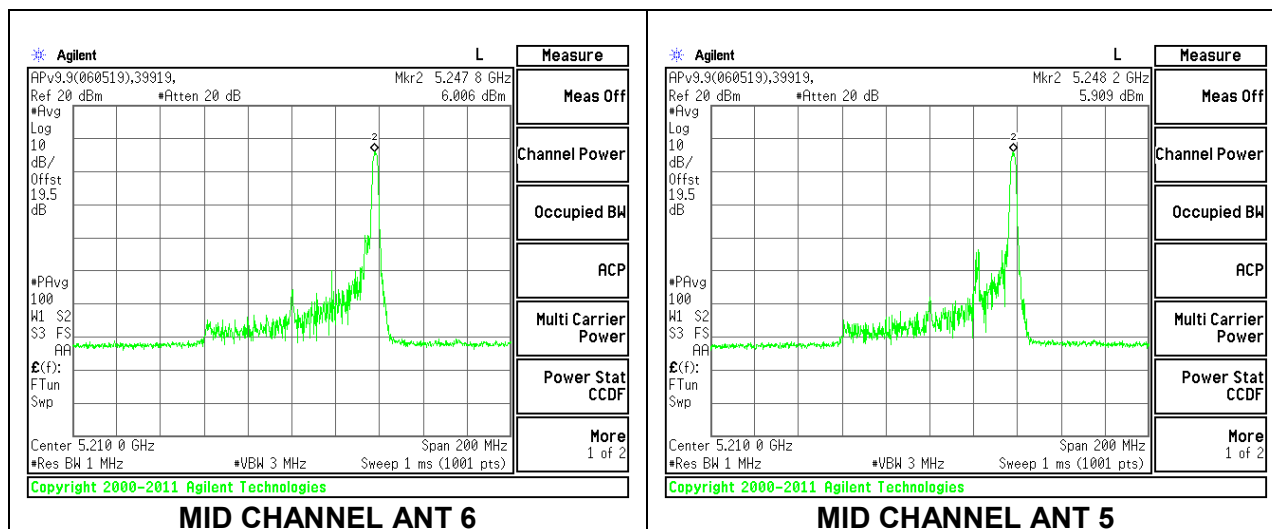

8.5.7. 802.11n HT20 MODE IN THE 5.3 GHz BAND

1TX Antenna 6 MODE (FCC)

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.70	-4.00	24.00	11.00
Mid	5300	21.45	-4.00	24.00	11.00
High	5320	21.35	-4.00	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.37	20.37	24.00	-3.63
Mid	5300	20.30	20.30	24.00	-3.70
High	5320	18.73	18.73	24.00	-5.27

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	10.880	10.88	11.00	-0.12
Mid	5300	10.550	10.55	11.00	-0.45
High	5320	8.699	8.70	11.00	-2.30

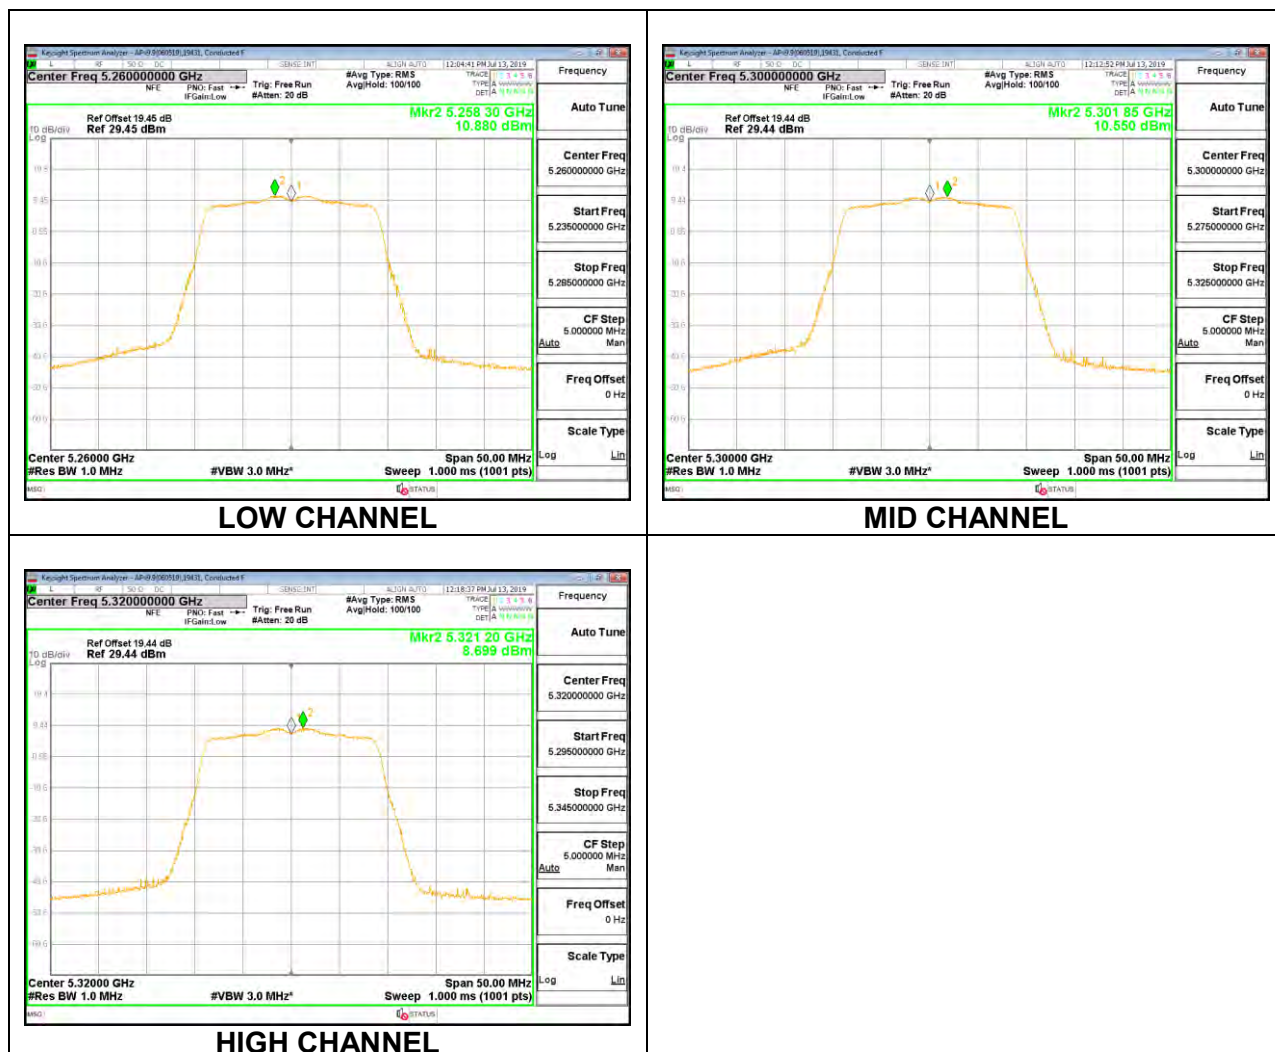

1TX Antenna 5 MODE (FCC)

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.65	-9.7	24.00	11.00
Mid	5300	21.70	-9.7	24.00	11.00
High	5320	21.40	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.75	20.75	24.00	-3.25
Mid	5300	20.69	20.69	24.00	-3.31
High	5320	18.82	18.82	24.00	-5.18

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	10.907	10.91	11.00	-0.09
Mid	5300	10.727	10.73	11.00	-0.27
High	5320	8.765	8.77	11.00	-2.24

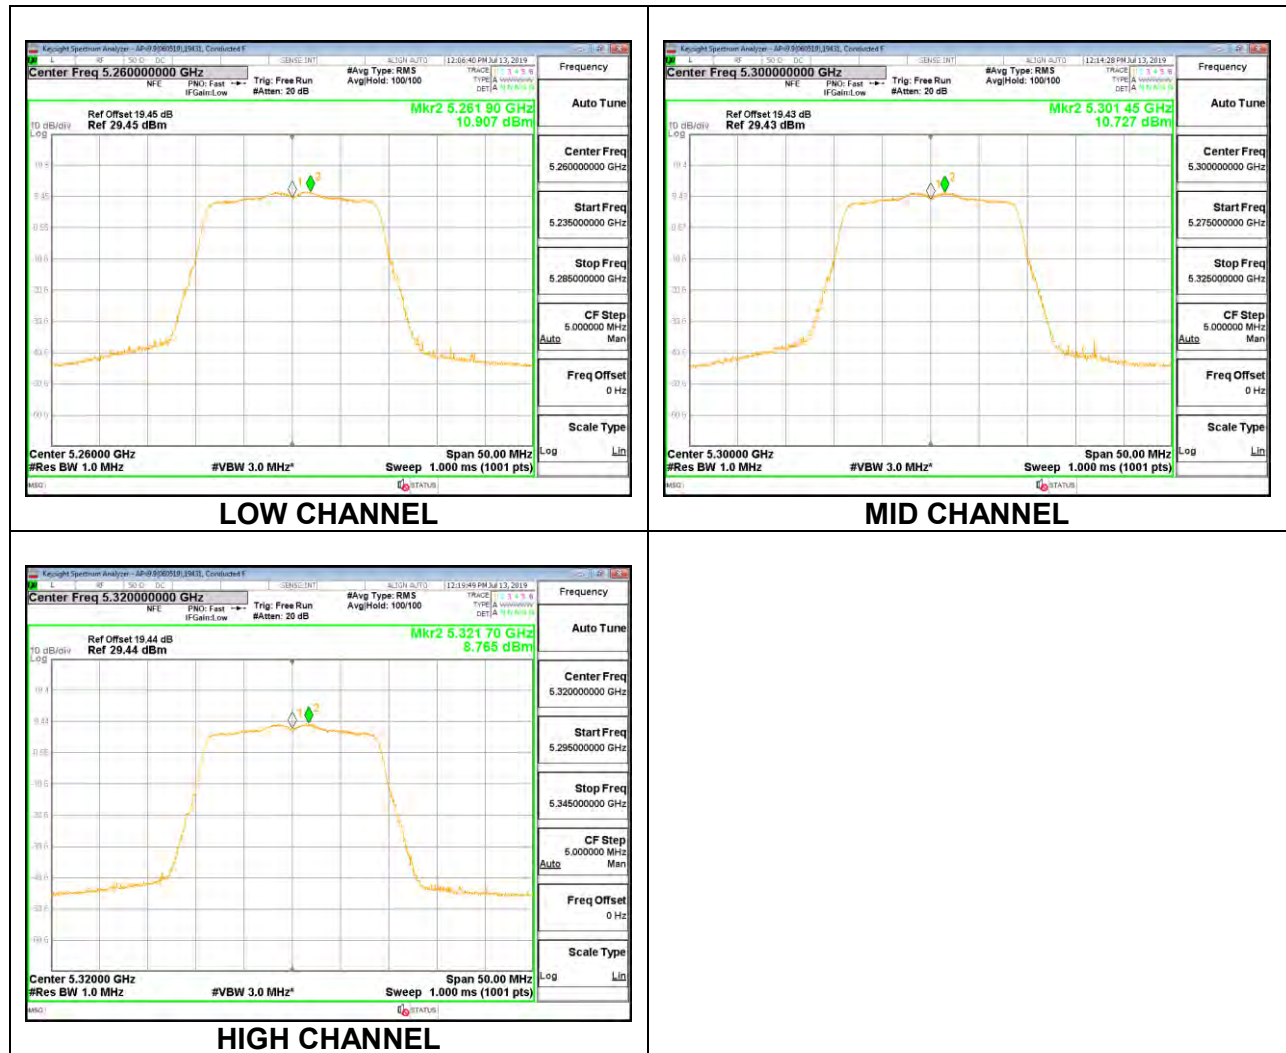

2TX Antenna 6 + Antenna 5 CDD MODE (FCC)

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.45	-5.98	-3.38	24.00	11.00
Mid	5300	21.40	-5.98	-3.38	24.00	11.00
High	5320	21.40	-5.98	-3.38	24.00	11.00







Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	17.77	17.72	20.76	24.00	-3.24
Mid	5300	17.81	17.82	20.83	24.00	-3.17
High	5320	17.69	17.81	20.76	24.00	-3.24

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	7.792	7.702	10.76	11.00	-0.24
Mid	5300	7.799	7.813	10.82	11.00	-0.18
High	5320	7.654	7.807	10.74	11.00	-0.26

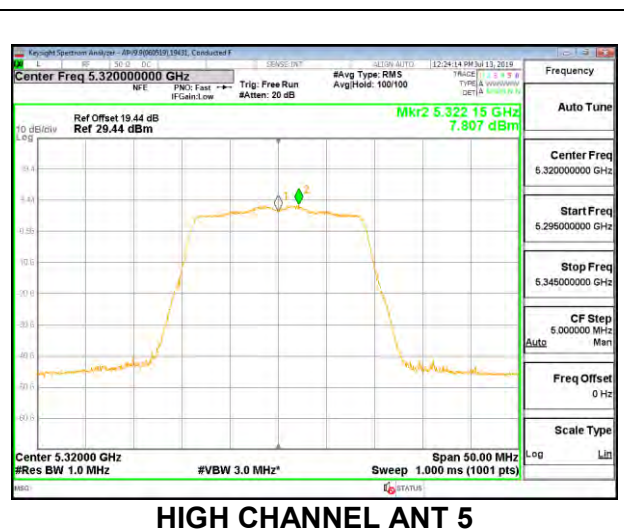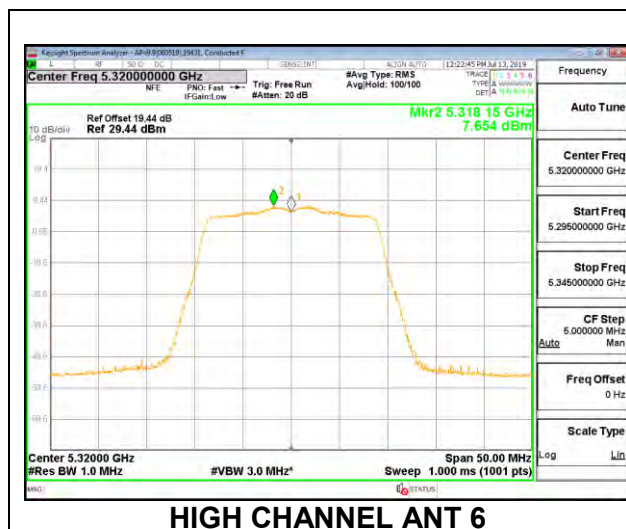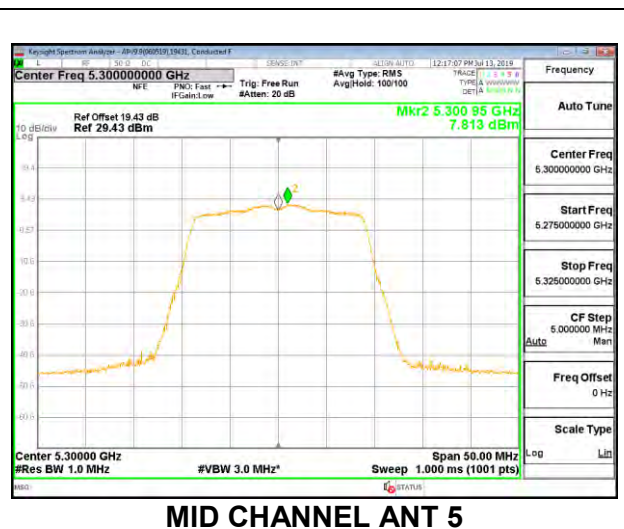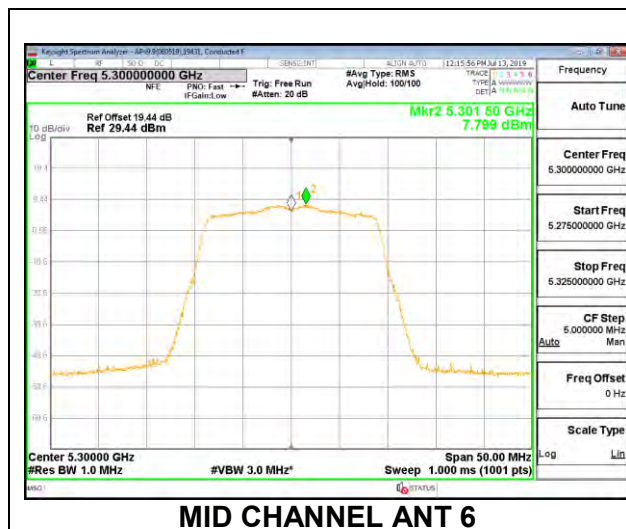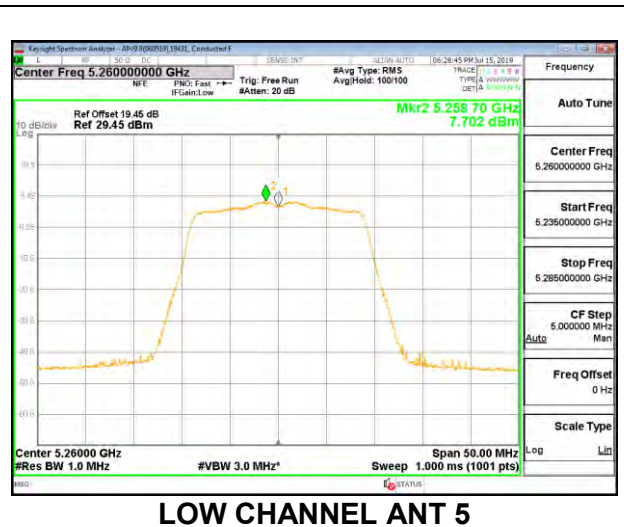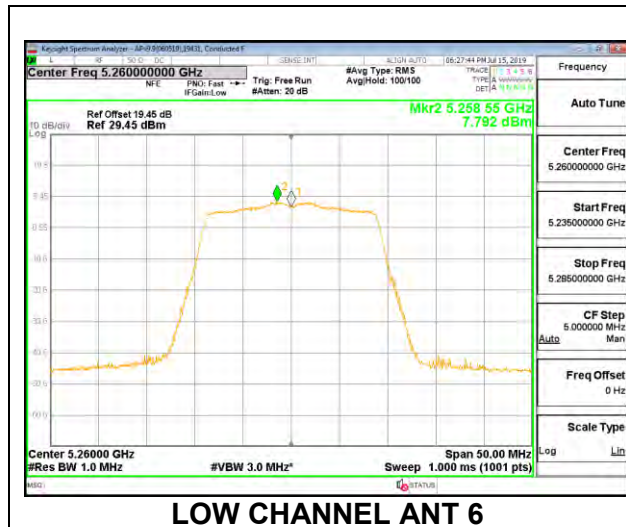

8.5.8. 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX Antenna 6 MODE (FCC)

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	42.90	-4.0	24.00	11.00
High	5310	41.40	-4.0	24.00	11.00


Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	20.68	20.68	24.00	-3.32
High	5310	17.30	17.30	24.00	-6.70

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.839	7.93	11.00	-3.07
High	5310	4.468	4.56	11.00	-6.44

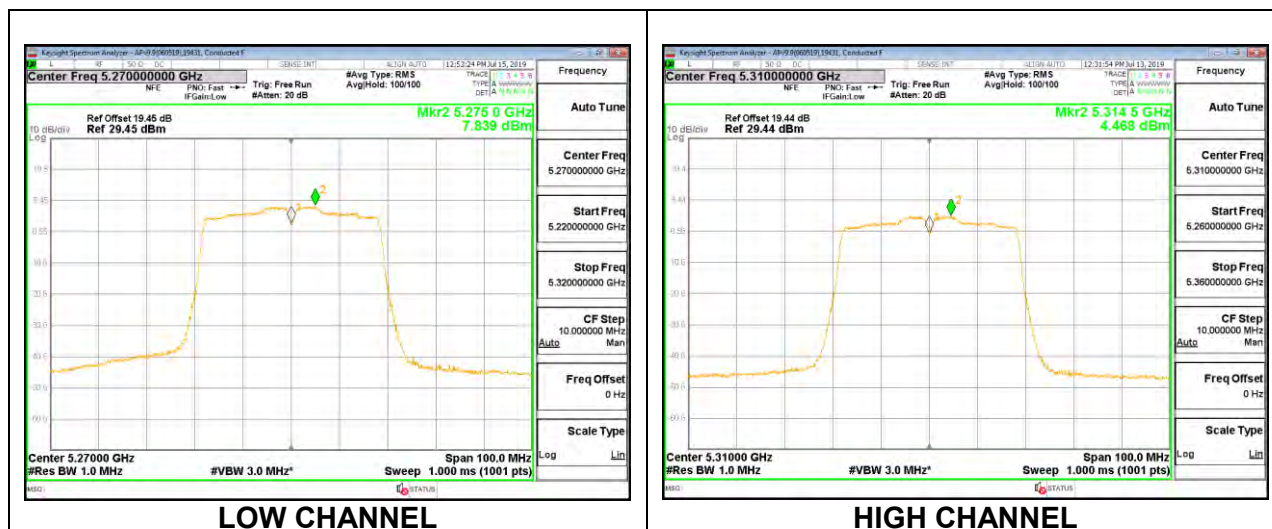

1TX Antenna 5 MODE (FCC)

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	41.50	-9.7	24.00	11.00
High	5310	41.00	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	21.27	21.27	24.00	-2.73
High	5310	17.28	17.28	24.00	-6.72

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	8.153	8.24	11.00	-2.76
High	5310	4.141	4.23	11.00	-6.77

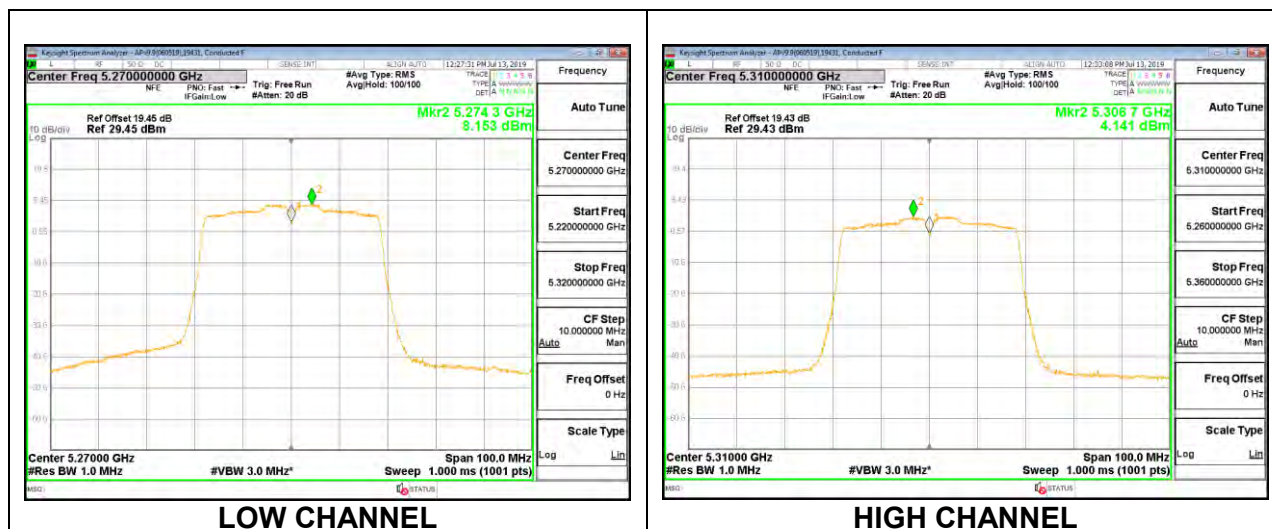

2TX Antenna 6 + Antenna 5 CDD MODE (FCC)

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	40.80	-5.98	-3.38	24.00	11.00
High	5310	40.90	-5.98	-3.38	24.00	11.00





Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	19.77	19.71	22.75	24.00	-1.25
High	5310	16.72	16.76	19.75	24.00	-4.25

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.988	5.908	9.58	11.00	-1.42
High	5310	3.898	3.493	6.80	11.00	-4.20

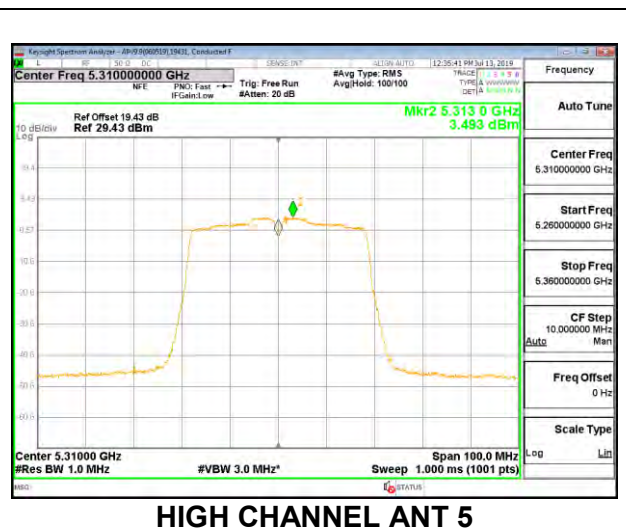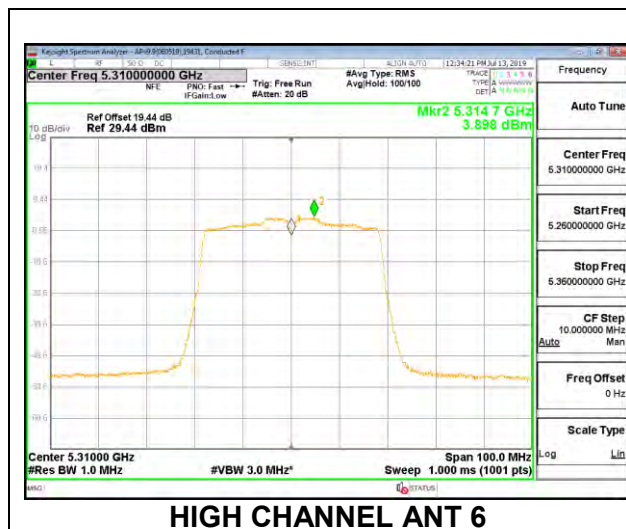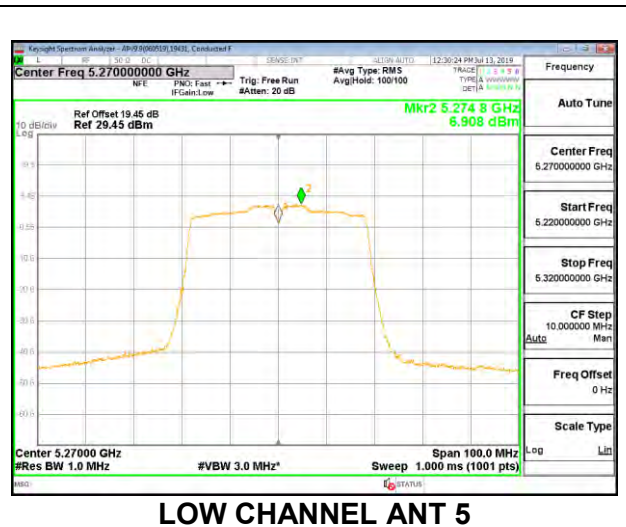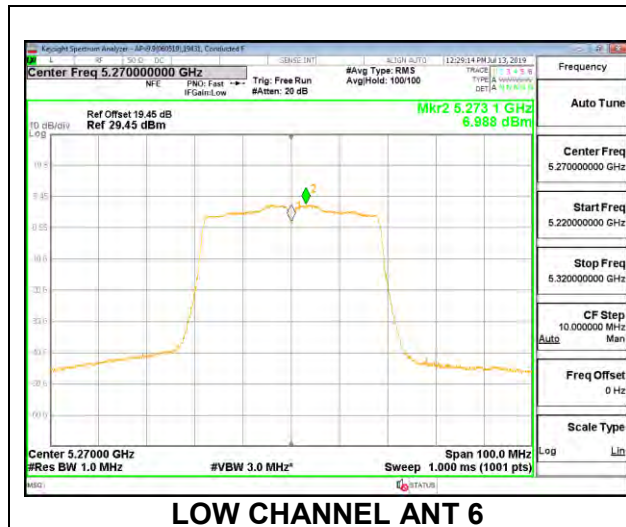

8.5.9. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX Antenna 6 MODE (FCC)

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	85.40	-4.0	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	17.32	17.32	24.00	-6.68

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	1.150	1.34	11.00	-9.66

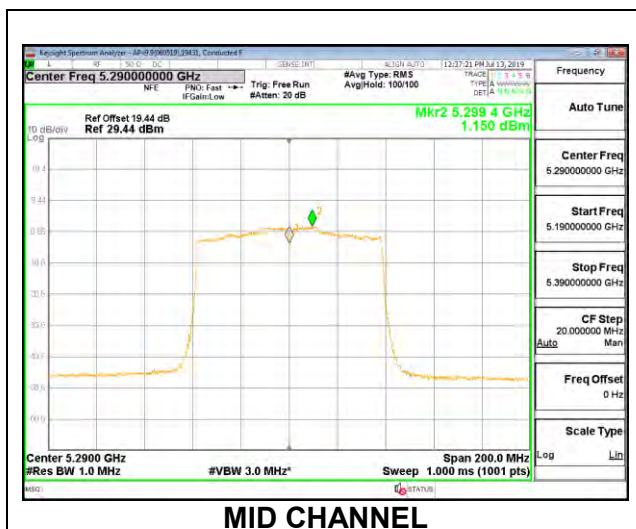

1TX Antenna 5 MODE (FCC)

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	86.00	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	17.29	17.29	24.00	-6.71

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	1.065	1.26	11.00	-9.75

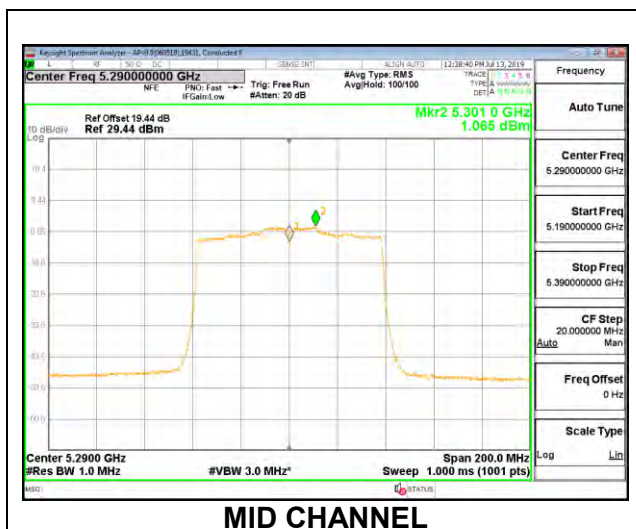

2TX Antenna 6 + Antenna 5 CDD MODE (FCC)

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	84.80	-5.98	-3.38	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	16.19	16.23	19.22	24.00	-4.78

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	0.006	0.021	3.21	11.00	-7.79

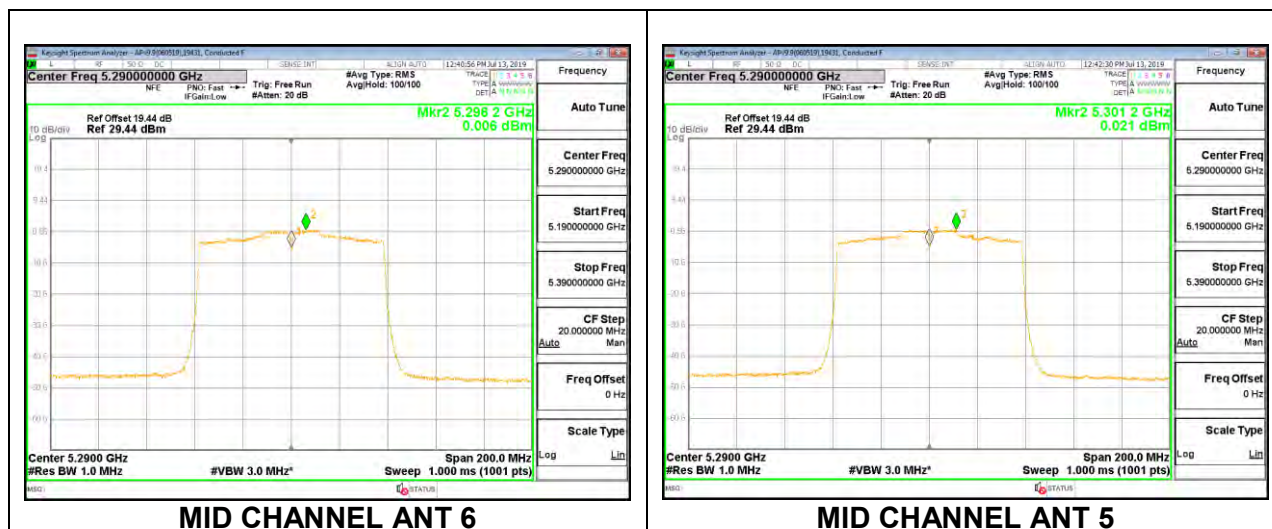

8.5.10. 802.11ax HE20 MODE IN THE 5.3 GHz BAND

1TX Antenna 6 MODE (FCC) – 242 Tones, RU Index 61

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.95	-4.0	24.00	11.00
Mid	5300	22.10	-4.0	24.00	11.00
High	5320	21.80	-4.0	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.67	20.67	24.00	-3.33
Mid	5300	20.63	20.63	24.00	-3.37
High	5320	17.77	17.77	24.00	-6.23

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	10.968	10.97	11.00	-0.03
Mid	5300	10.634	10.63	11.00	-0.37
High	5320	7.342	7.34	11.00	-3.66

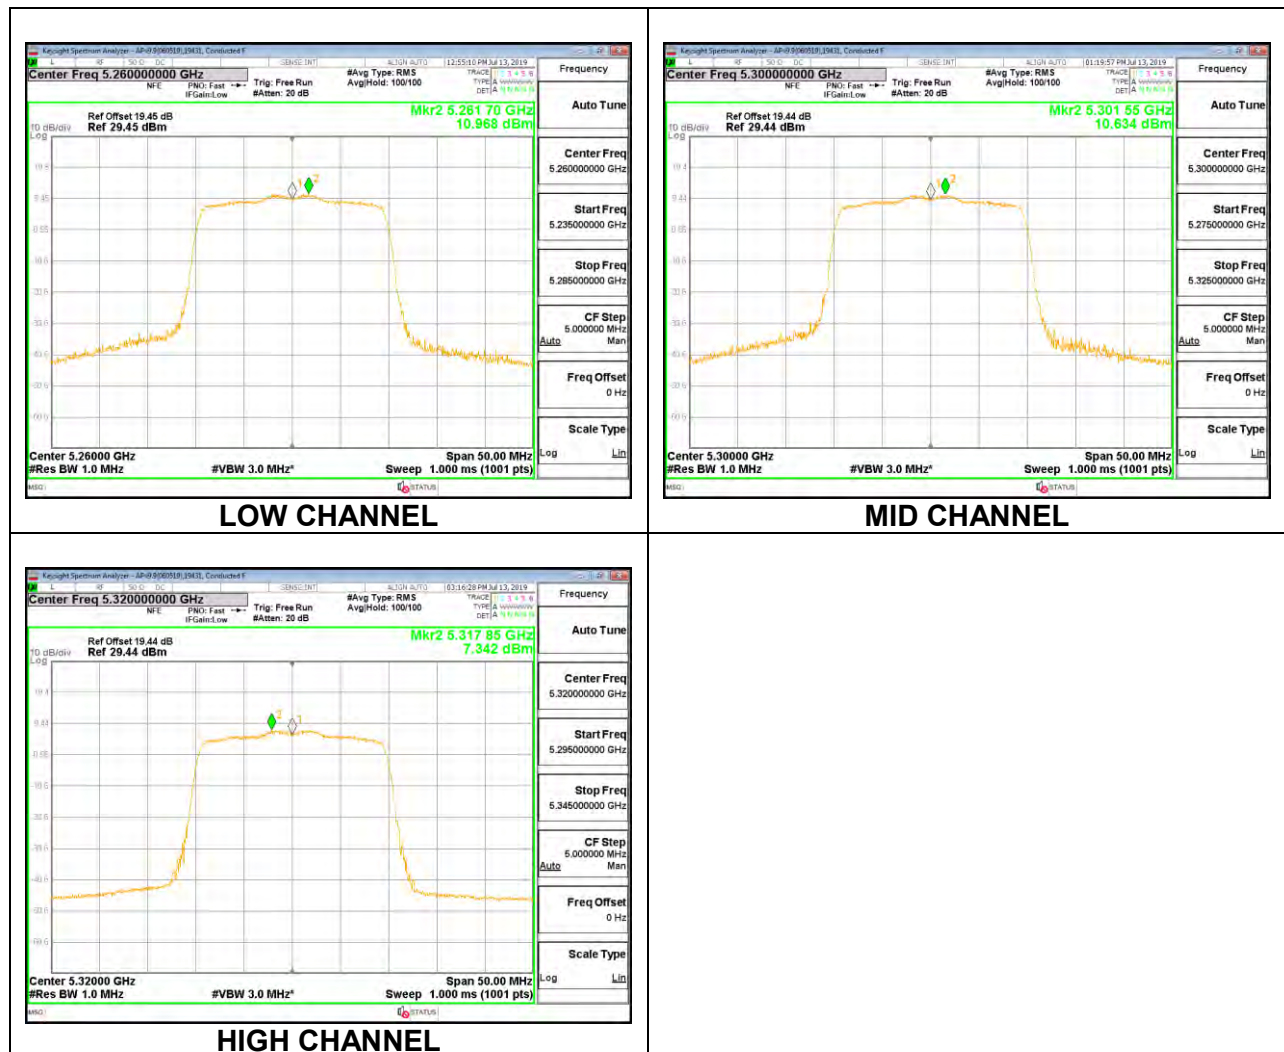

1TX Antenna 6 MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	20.60	4.0	24.00	11.00
Mid	5300	20.50	-4.0	24.00	11.00
High	5320	20.65	-4.0	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.72	11.72	24.00	-12.28
Mid	5300	11.74	11.74	24.00	-12.26
High	5320	11.67	11.67	24.00	-12.33

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	9.817	9.82	11.00	-1.18
Mid	5300	9.859	9.86	11.00	-1.14
High	5320	9.536	9.54	11.00	-1.46

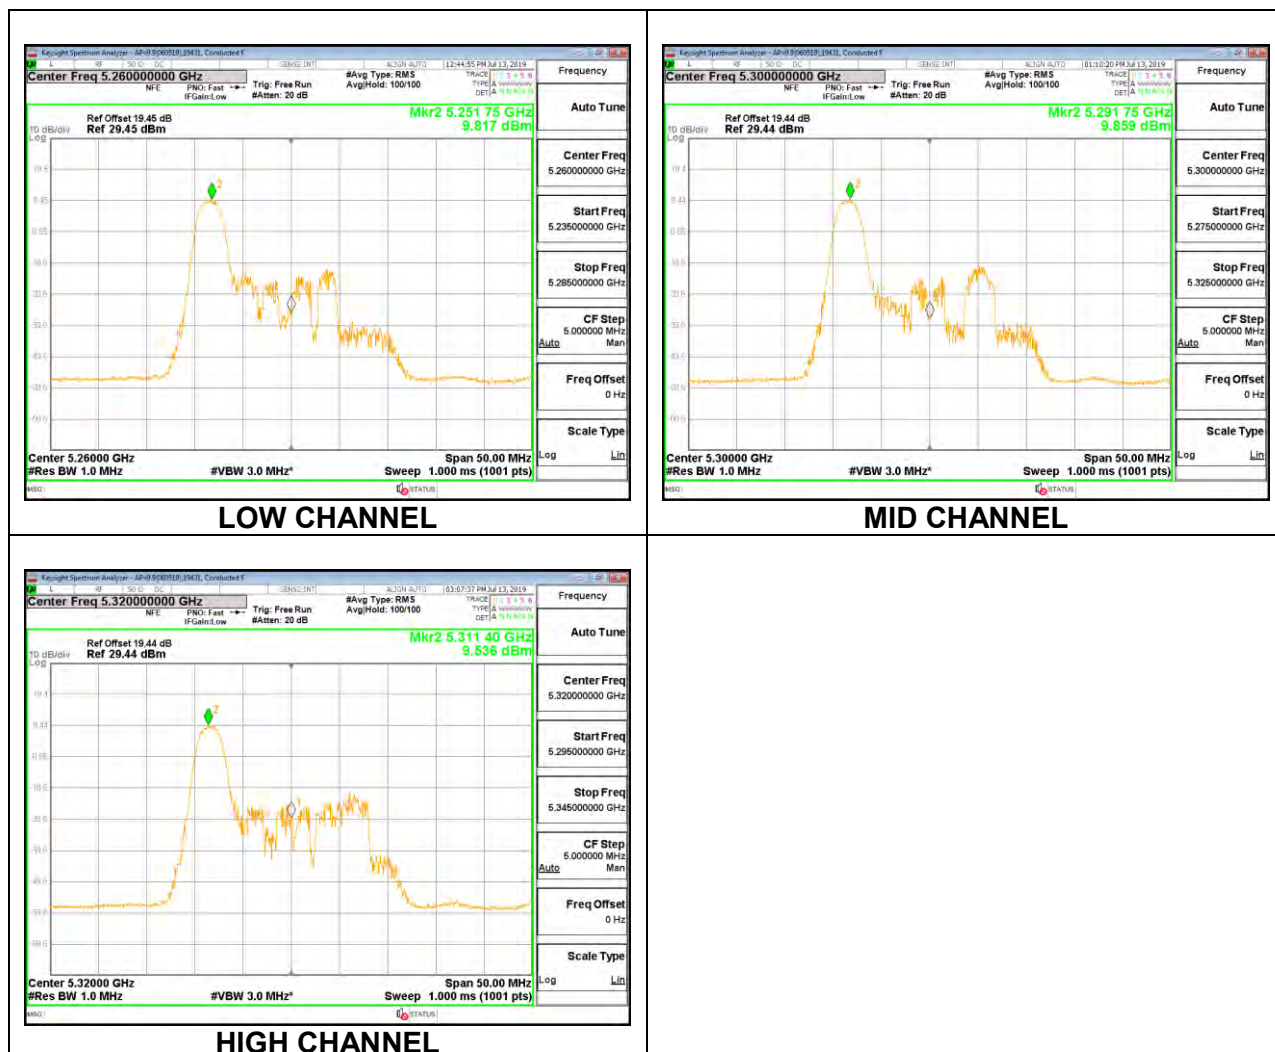

1TX Antenna 6 MODE (FCC) – 26 Tones, RU Index 4

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	19.70	-4.0	23.94	11.00
Mid	5300	19.90	-4.0	23.99	11.00
High	5320	19.75	-4.0	23.96	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.68	11.68	23.94	-12.26
Mid	5300	11.65	11.65	23.99	-12.34
High	5320	11.61	11.61	23.96	-12.35

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	8.361	8.36	11.00	-2.64
Mid	5300	8.312	8.31	11.00	-2.69
High	5320	8.266	8.27	11.00	-2.73

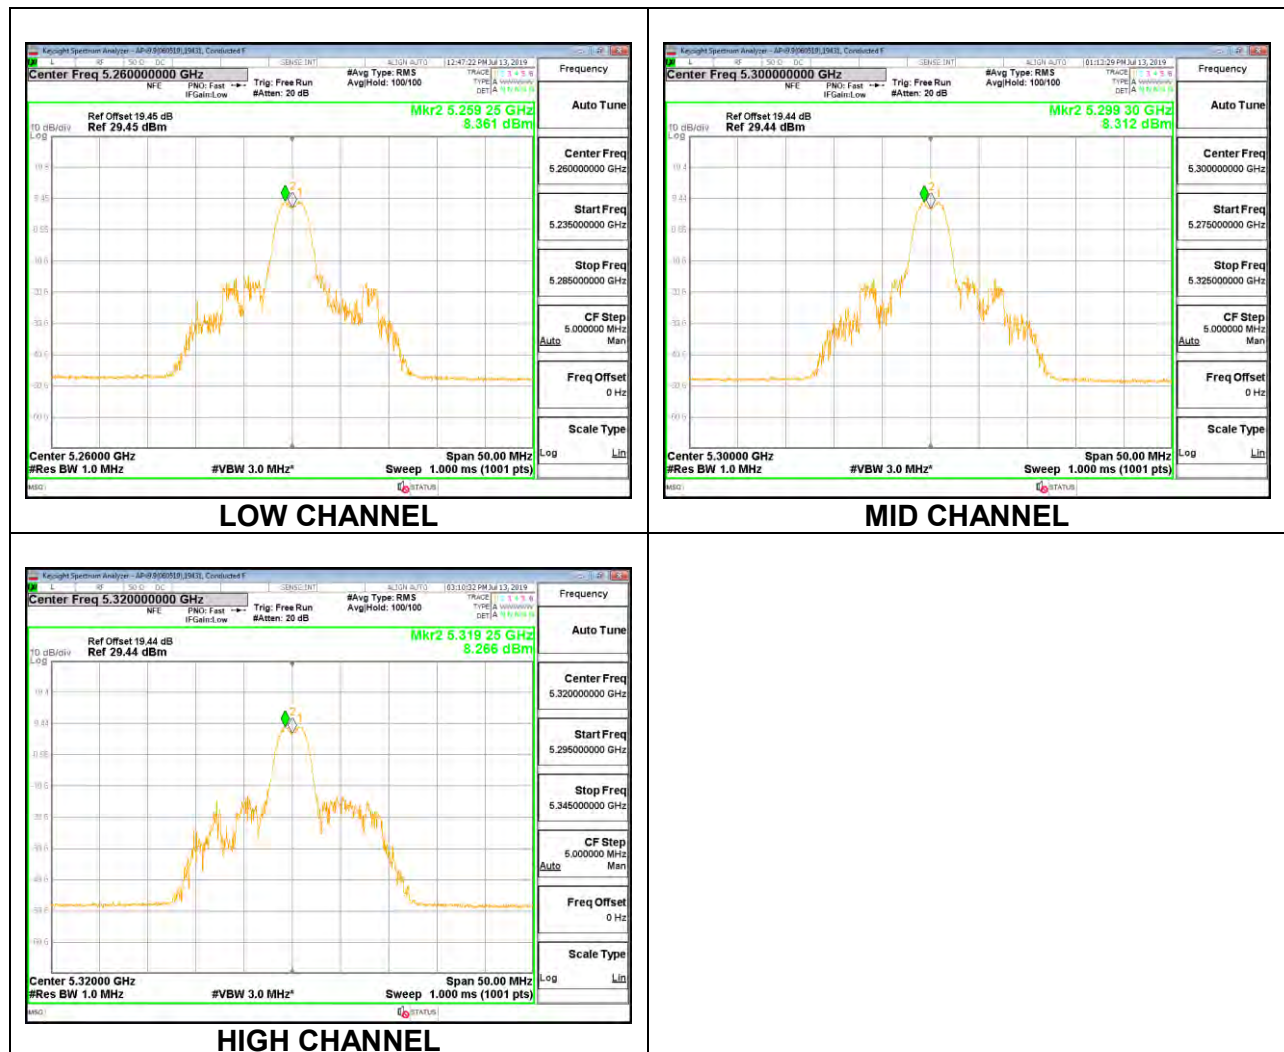

1TX Antenna 6 MODE (FCC) – 26 Tones, RU Index 8

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.05	-4.0	24.00	11.00
Mid	5300	21.10	-4.0	24.00	11.00
High	5320	21.00	-4.0	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.72	11.72	24.00	-12.28
Mid	5300	11.76	11.76	24.00	-12.24
High	5320	11.68	11.68	24.00	-12.32

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	9.653	9.65	11.00	-1.35
Mid	5300	9.809	9.81	11.00	-1.19
High	5320	9.216	9.22	11.00	-1.78

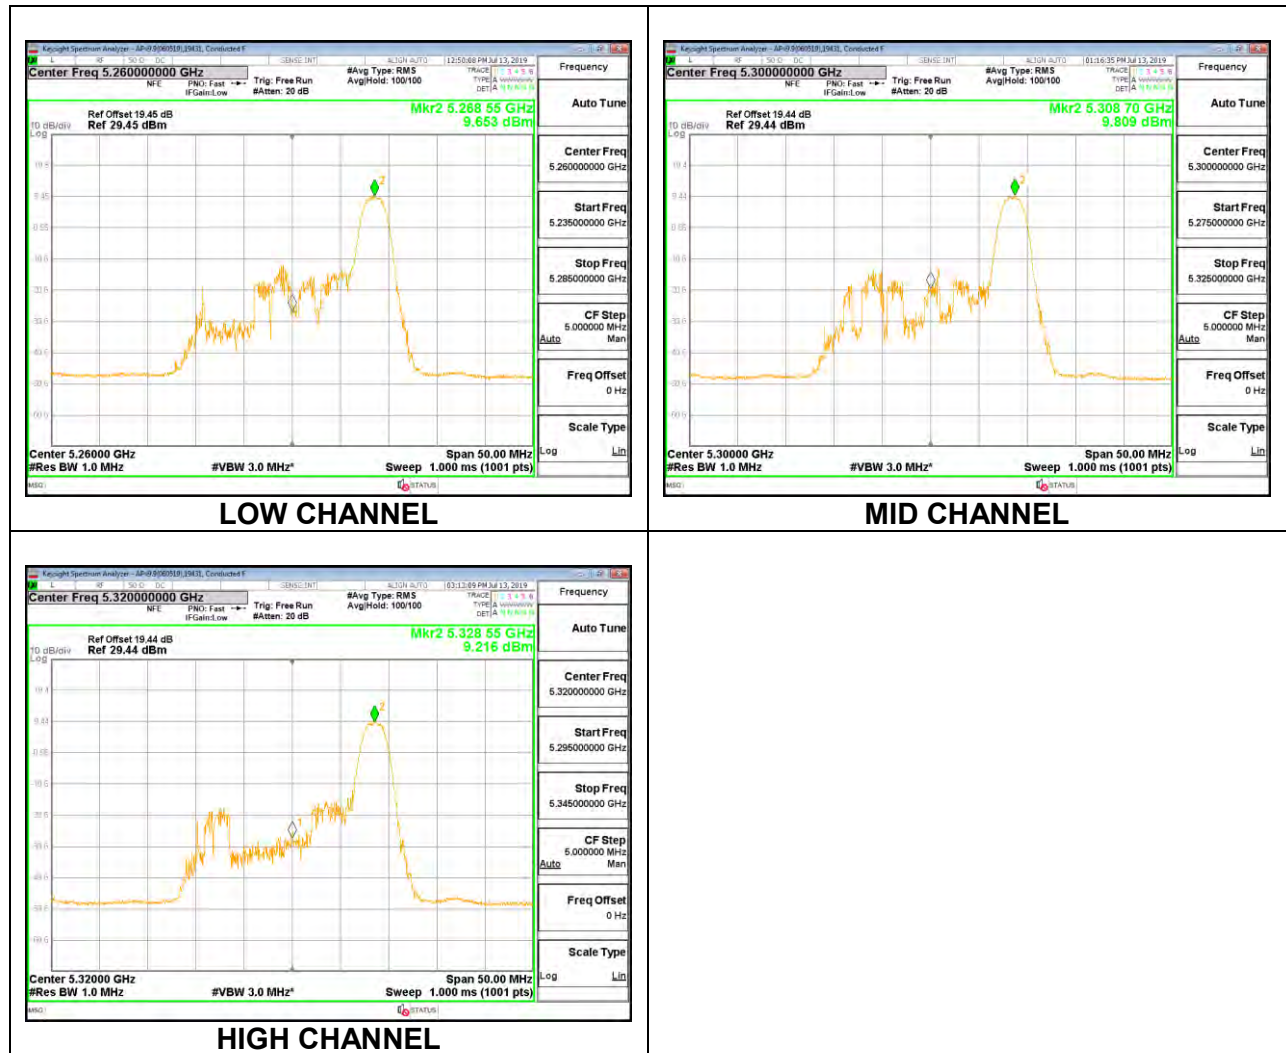

1TX Antenna 5 MODE (FCC) – 242 Tones, RU Index 61

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.90	-9.7	24.00	11.00
Mid	5300	21.90	-9.7	24.00	11.00
High	5320	22.15	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.66	20.66	24.00	-3.34
Mid	5300	20.61	20.61	24.00	-3.39
High	5320	17.64	17.64	24.00	-6.36

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	10.719	10.72	11.00	-0.28
Mid	5300	10.561	10.56	11.00	-0.44
High	5320	7.412	7.41	11.00	-3.59

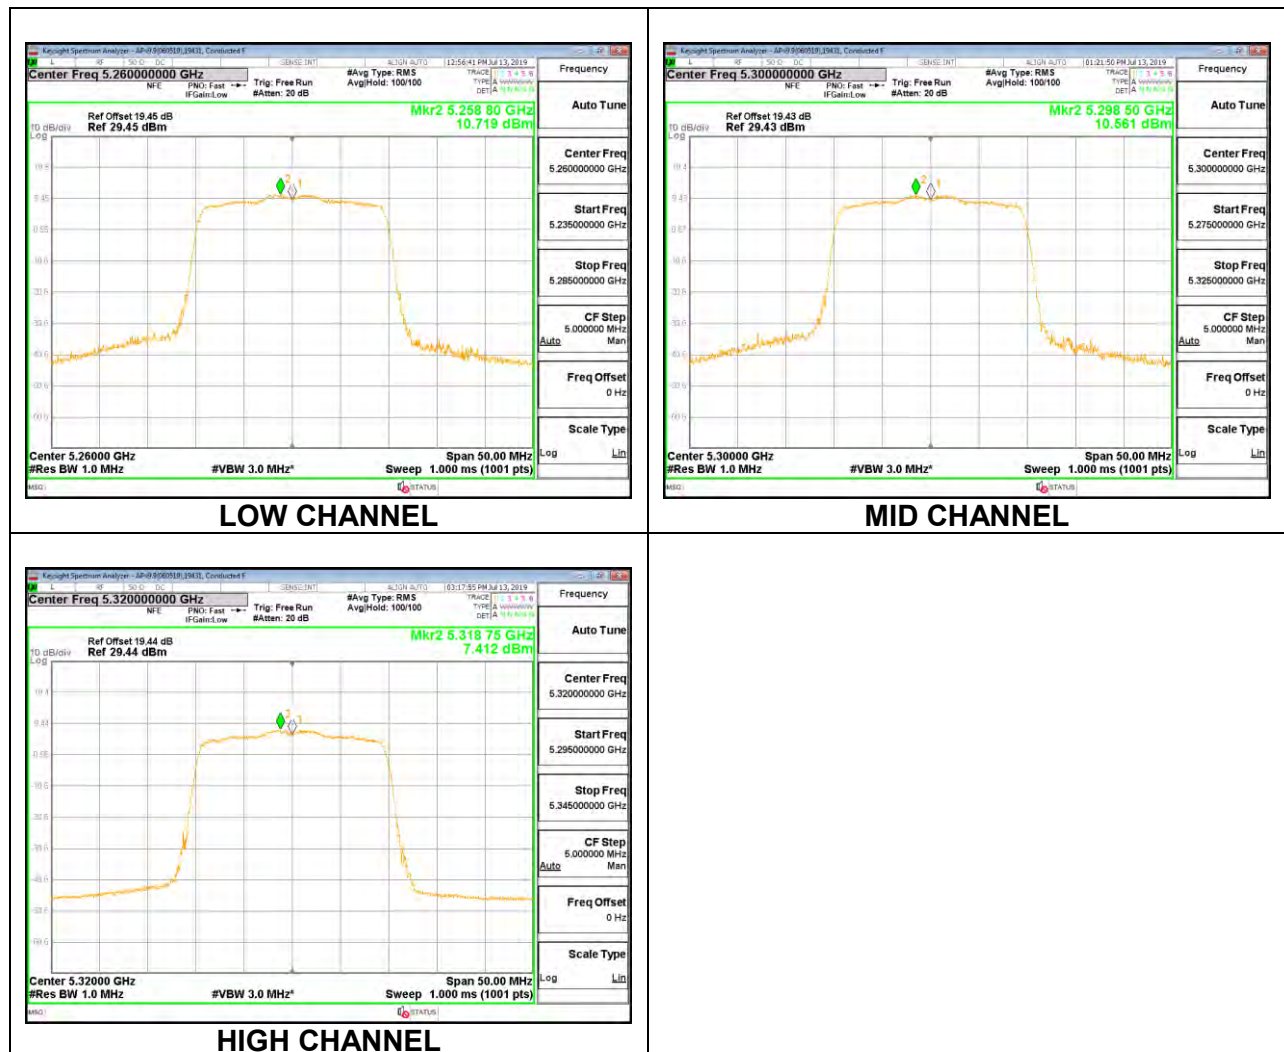

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	20.40	-9.7	24.00	11.00
Mid	5300	20.65	-9.7	24.00	11.00
High	5320	20.50	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.77	11.77	24.00	-12.23
Mid	5300	11.72	11.72	24.00	-12.28
High	5320	11.81	11.81	24.00	-12.19

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	9.690	9.69	11.00	-1.31
Mid	5300	9.255	9.26	11.00	-1.75
High	5320	9.779	9.78	11.00	-1.22

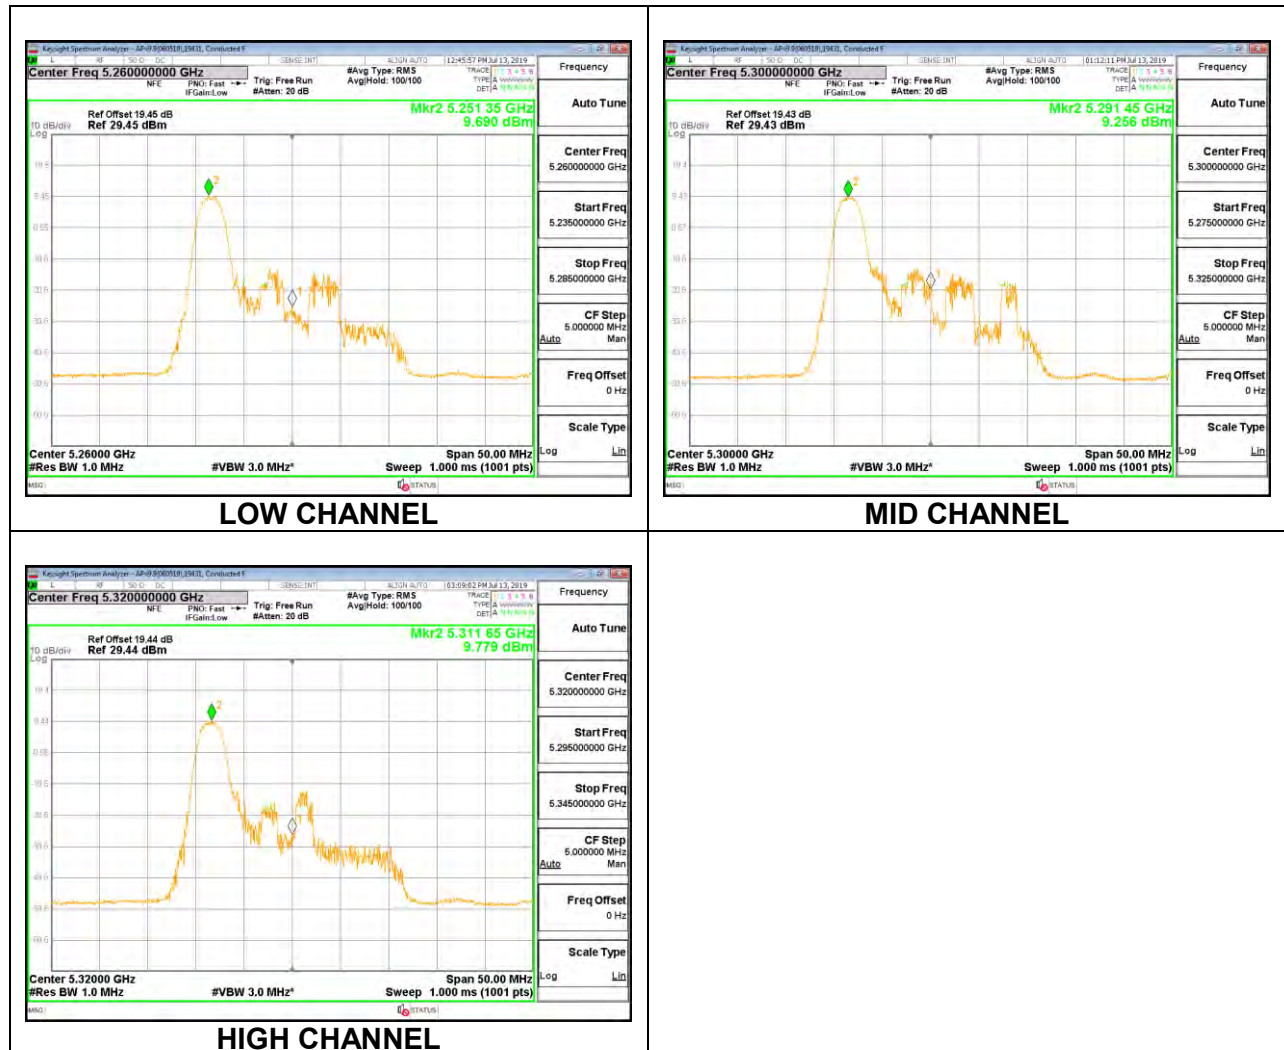

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 4

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	19.70	-9.70	23.94	11.00
Mid	5300	19.85	-9.70	23.98	11.00
High	5320	19.80	-9.70	23.97	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.69	11.69	23.94	-12.25
Mid	5300	11.66	11.66	23.98	-12.32
High	5320	11.64	11.64	23.97	-12.33

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	8.628	8.63	11.00	-2.37
Mid	5300	8.231	8.23	11.00	-2.77
High	5320	8.169	8.17	11.00	-2.83

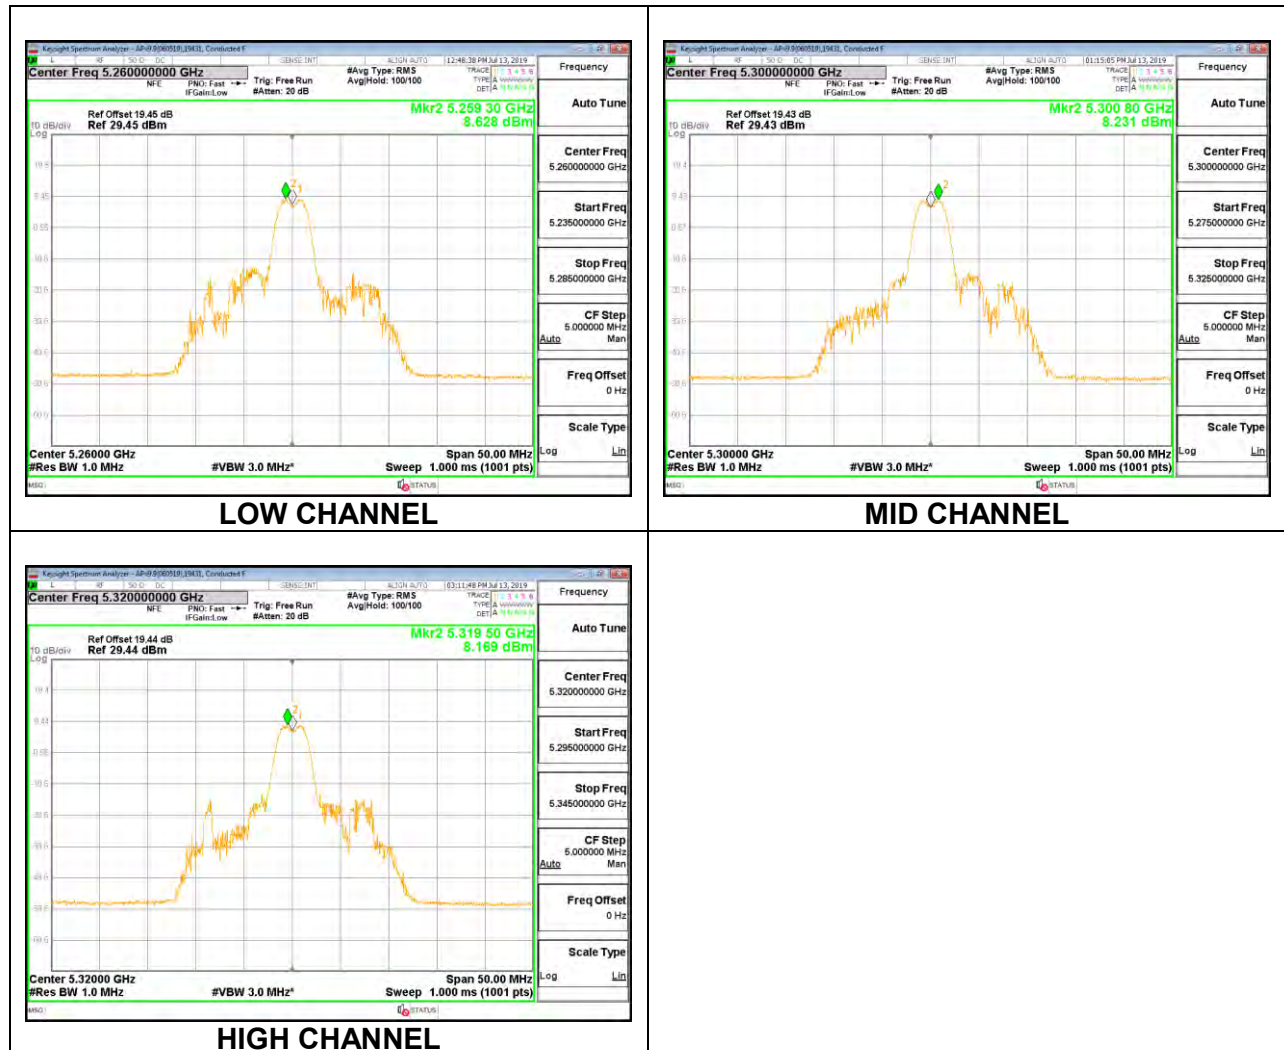

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 8

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	20.90	-9.7	24.00	11.00
Mid	5300	21.10	-9.7	24.00	11.00
High	5320	20.90	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.75	11.75	24.00	-12.25
Mid	5300	11.78	11.78	24.00	-12.22
High	5320	11.73	11.73	24.00	-12.27

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	9.477	9.48	11.00	-1.52
Mid	5300	9.528	9.53	11.00	-1.47
High	5320	9.443	9.44	11.00	-1.56

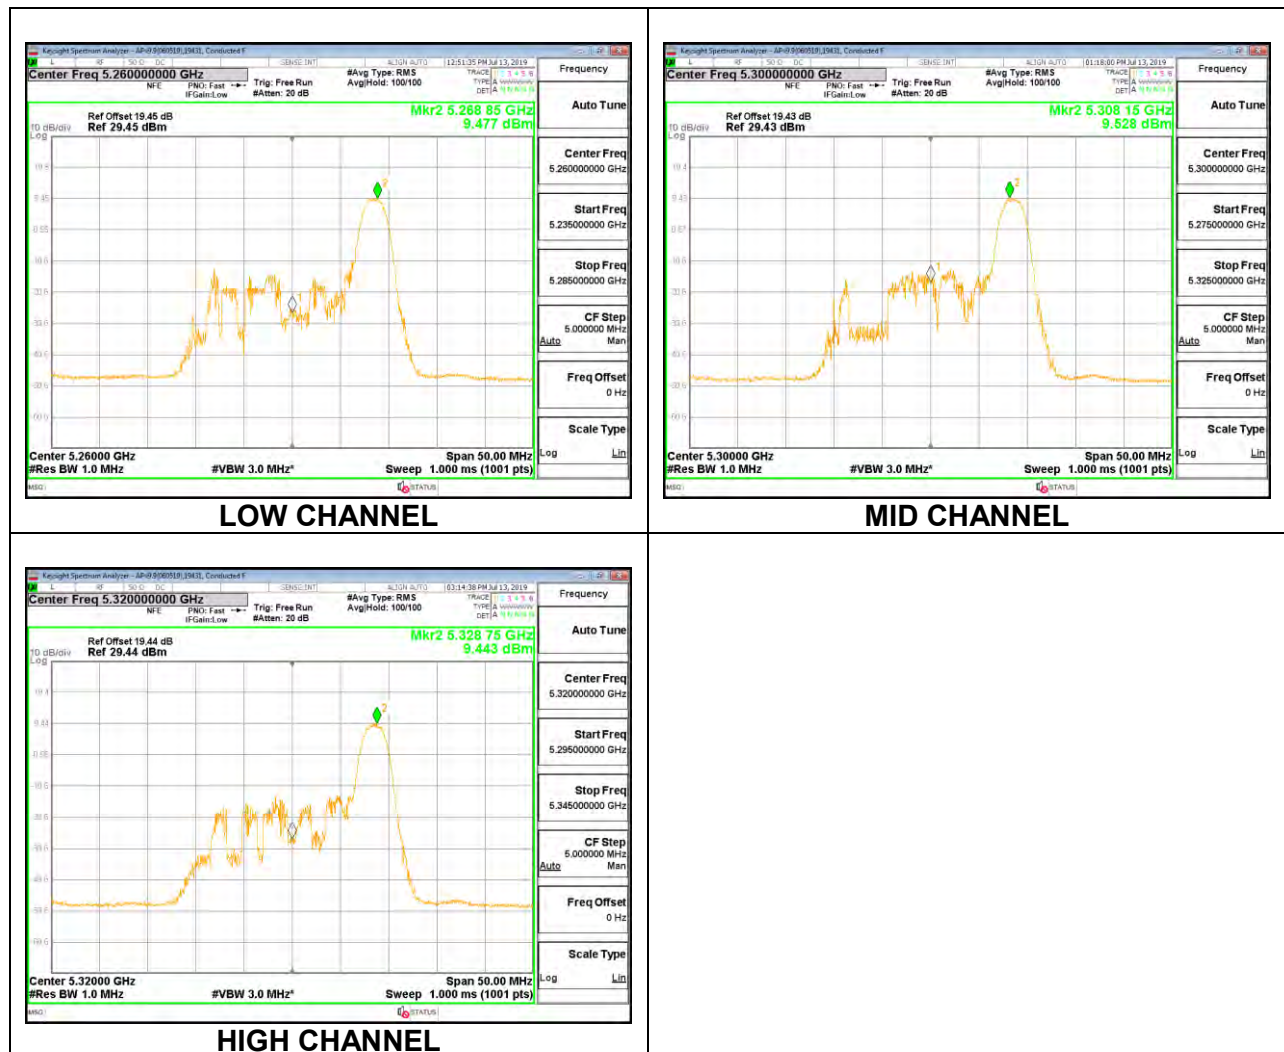

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 242 Tones, RU Index 61

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.65	-5.98	-3.38	24.00	11.00
Mid	5300	21.75	-5.98	-3.38	24.00	11.00
High	5320	21.60	-5.98	-3.38	24.00	11.00







Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	17.78	17.81	20.81	24.00	-3.19
Mid	5300	17.77	17.73	20.76	24.00	-3.24
High	5320	16.62	16.67	19.66	24.00	-4.34

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	7.571	7.654	10.62	11.00	-0.38
Mid	5300	7.525	7.316	10.43	11.00	-0.57
High	5320	6.403	6.648	9.54	11.00	-1.46

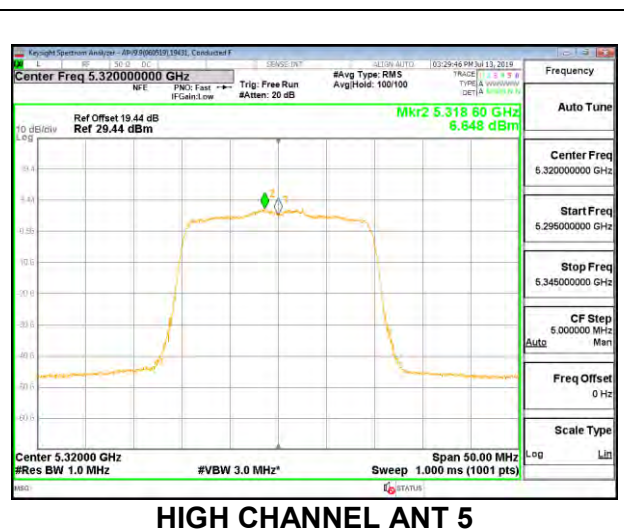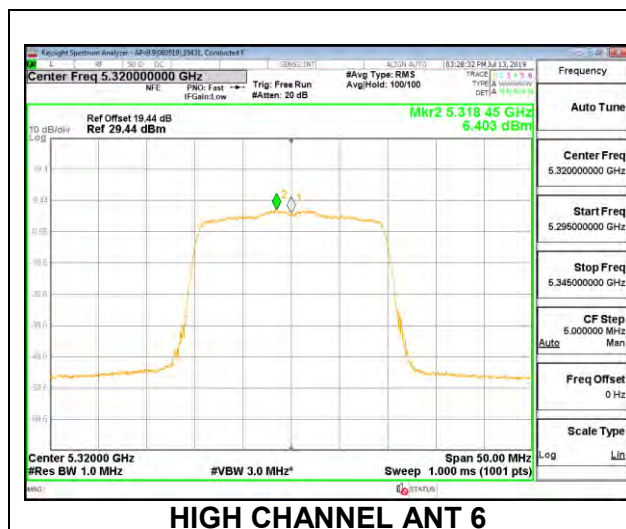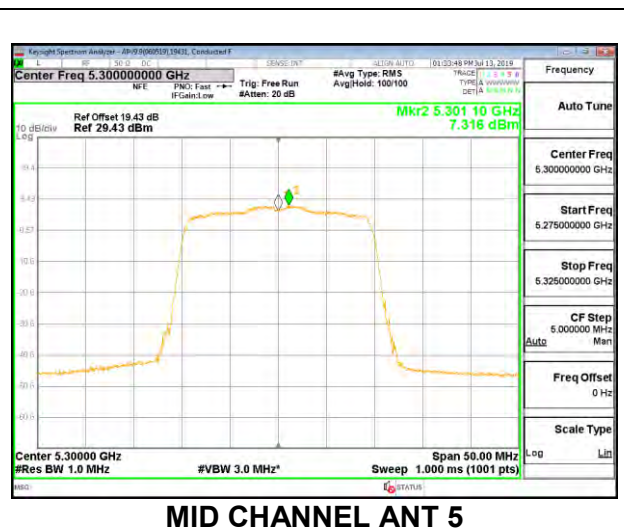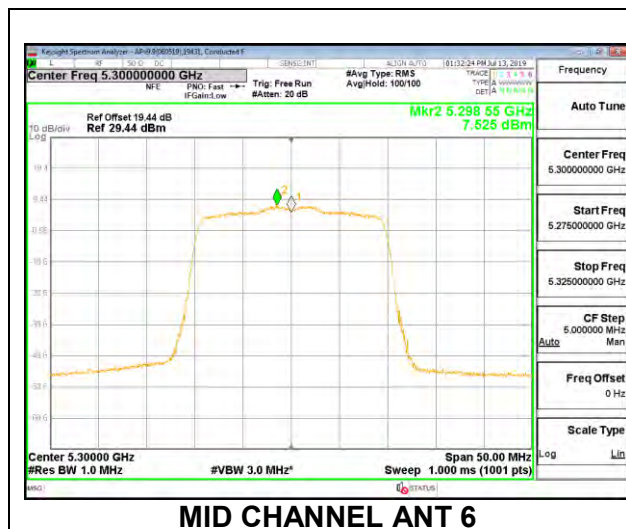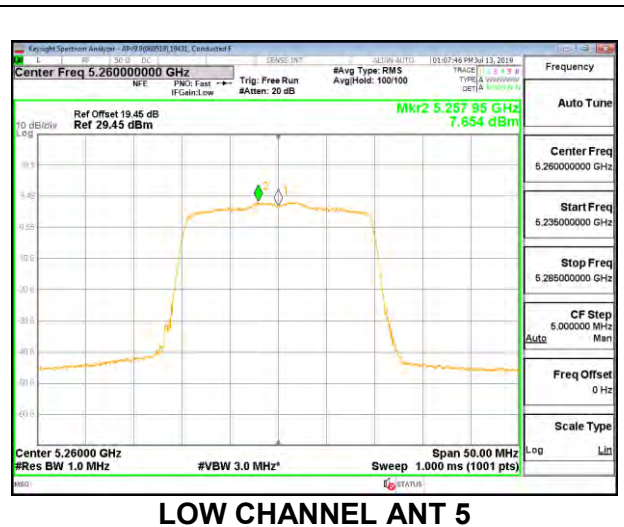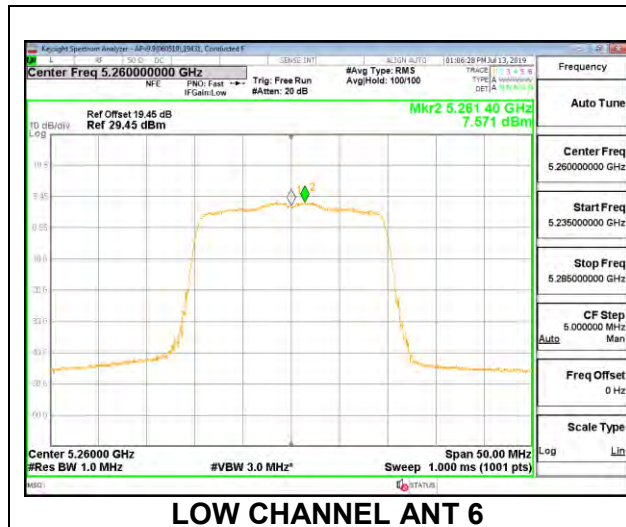

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	19.70	-5.98	-3.38	23.94	11.00
Mid	5300	20.10	-5.98	-3.38	24.00	11.00
High	5320	20.05	-5.98	-3.38	24.00	11.00







Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	8.82	8.76	11.80	23.94	-12.14
Mid	5300	8.78	8.71	11.76	24.00	-12.24
High	5320	8.67	8.76	11.73	24.00	-12.27

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	6.626	6.428	9.54	11.00	-1.46
Mid	5300	6.549	6.373	9.47	11.00	-1.53
High	5320	6.202	6.424	9.32	11.00	-1.68

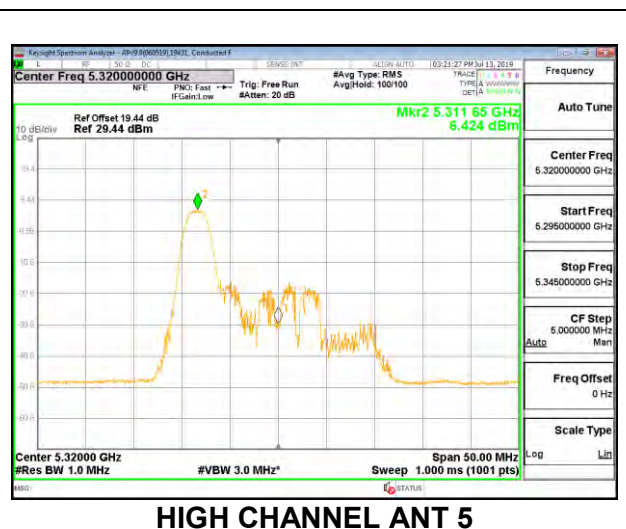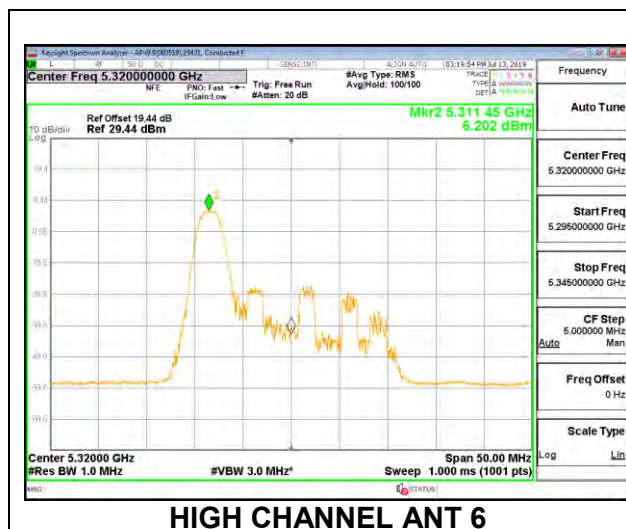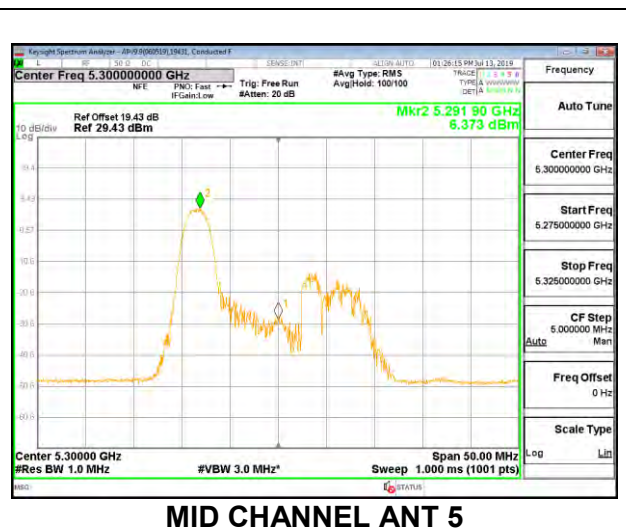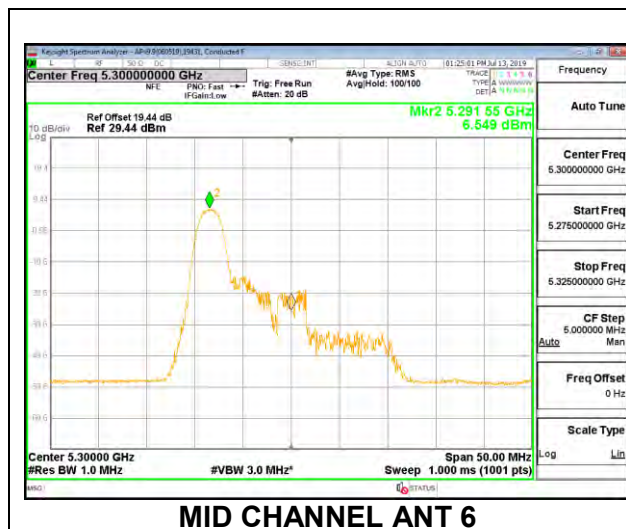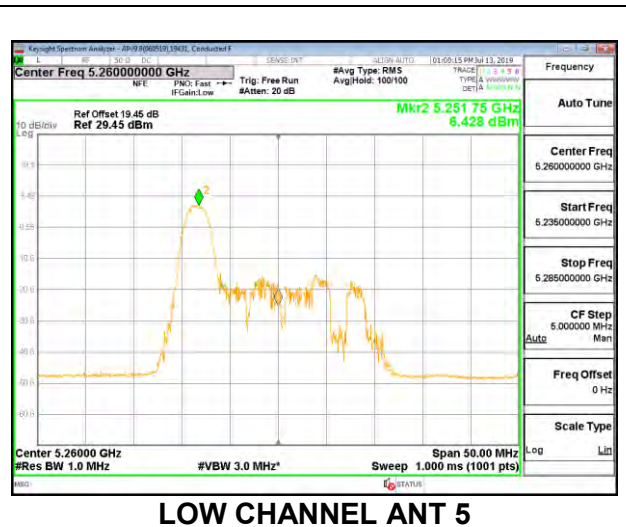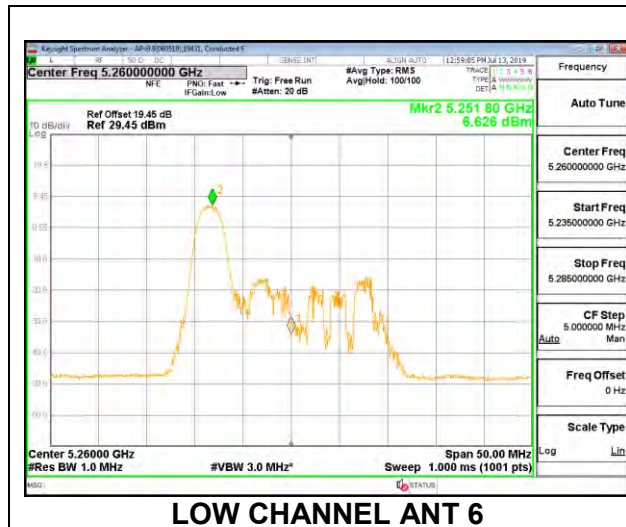

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 4

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	19.00	-5.98	-3.38	23.79	11.00
Mid	5300	18.40	-5.98	-3.38	23.65	11.00
High	5320	18.35	-5.98	-3.38	23.64	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	8.69	8.66	11.69	23.79	-12.10
Mid	5300	8.62	8.63	11.64	23.65	-12.01
High	5320	8.57	8.59	11.59	23.64	-12.05

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	5.607	5.460	8.54	11.00	-2.46
Mid	5300	5.311	5.354	8.34	11.00	-2.66
High	5320	5.022	5.130	8.09	11.00	-2.91

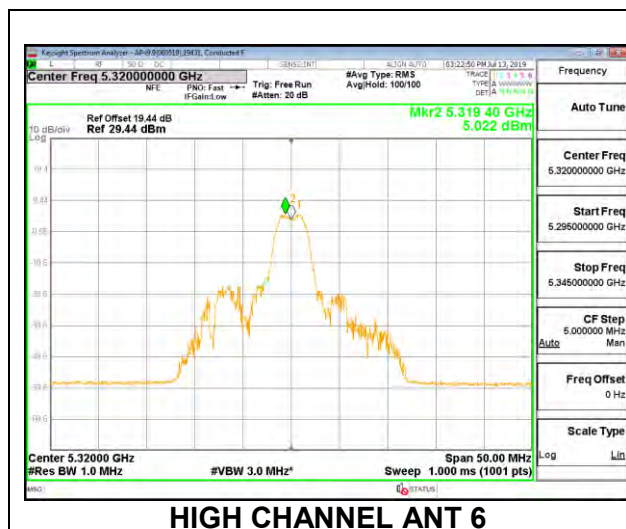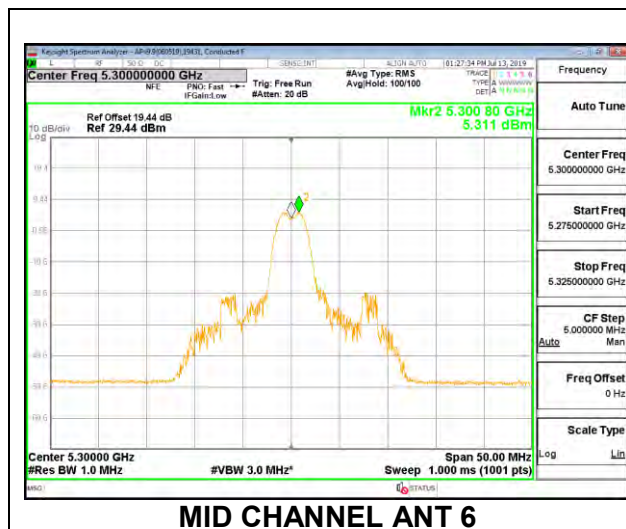

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 8

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	19.70	-5.98	-3.38	23.94	11.00
Mid	5300	20.20	-5.98	-3.38	24.00	11.00
High	5320	20.20	-5.98	-3.38	24.00	11.00






Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	8.78	8.68	11.74	23.94	-12.20
Mid	5300	8.72	8.70	11.72	24.00	-12.28
High	5320	8.68	8.61	11.66	24.00	-12.34

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	6.889	6.294	9.61	11.00	-1.39
Mid	5300	6.613	6.574	9.60	11.00	-1.40
High	5320	6.299	5.914	9.12	11.00	-1.88

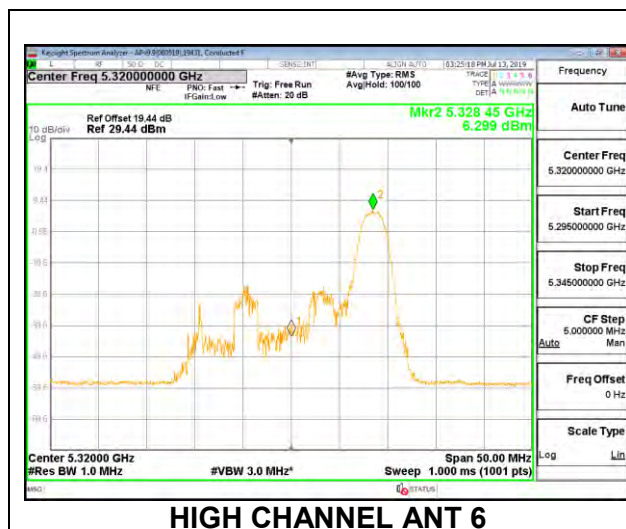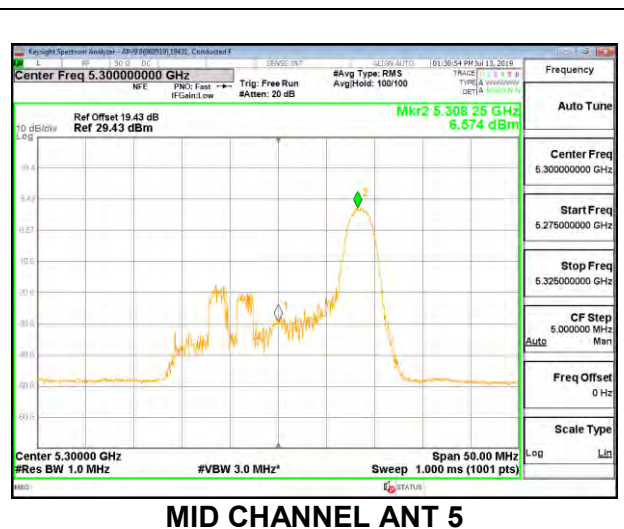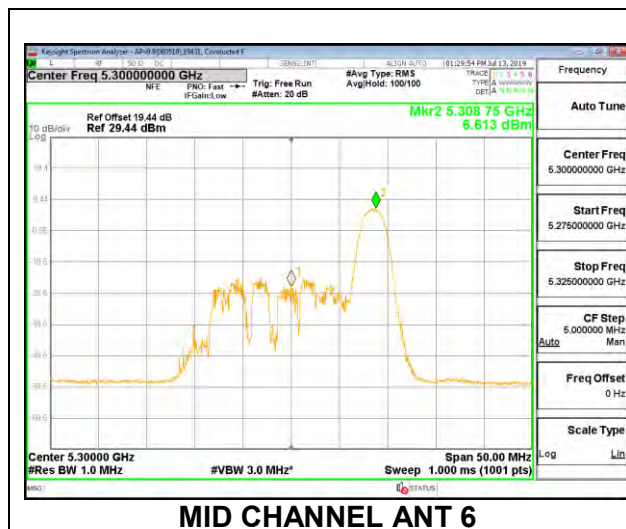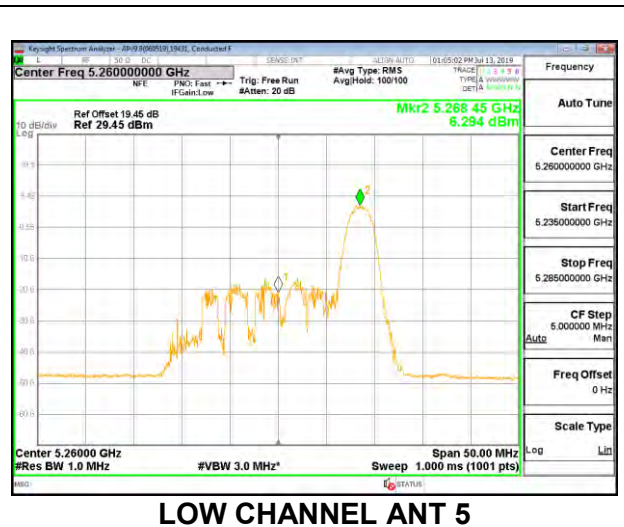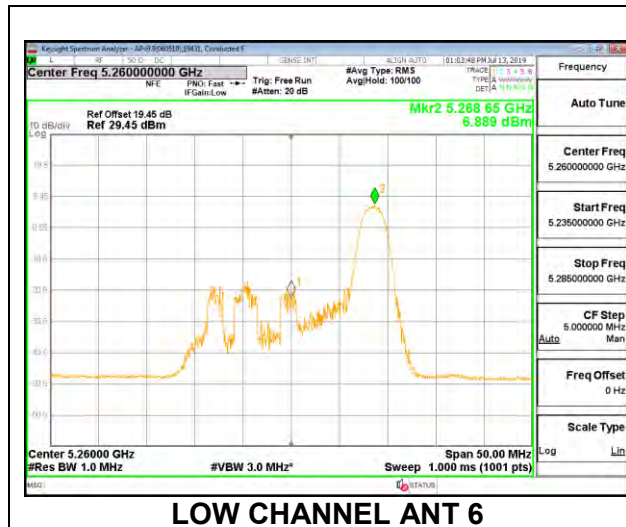

8.5.11. 802.11ax HE40 MODE IN THE 5.3 GHz BAND

1TX Antenna 6 MODE (FCC) – 484 Tones, RU Index 65

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	41.30	-4.0	24.00	11.00
High	5310	41.30	-4.0	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	20.68	20.68	24.00	-3.32
High	5310	15.71	15.71	24.00	-8.29

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.517	7.52	11.00	-3.48
High	5310	2.643	2.64	11.00	-8.36

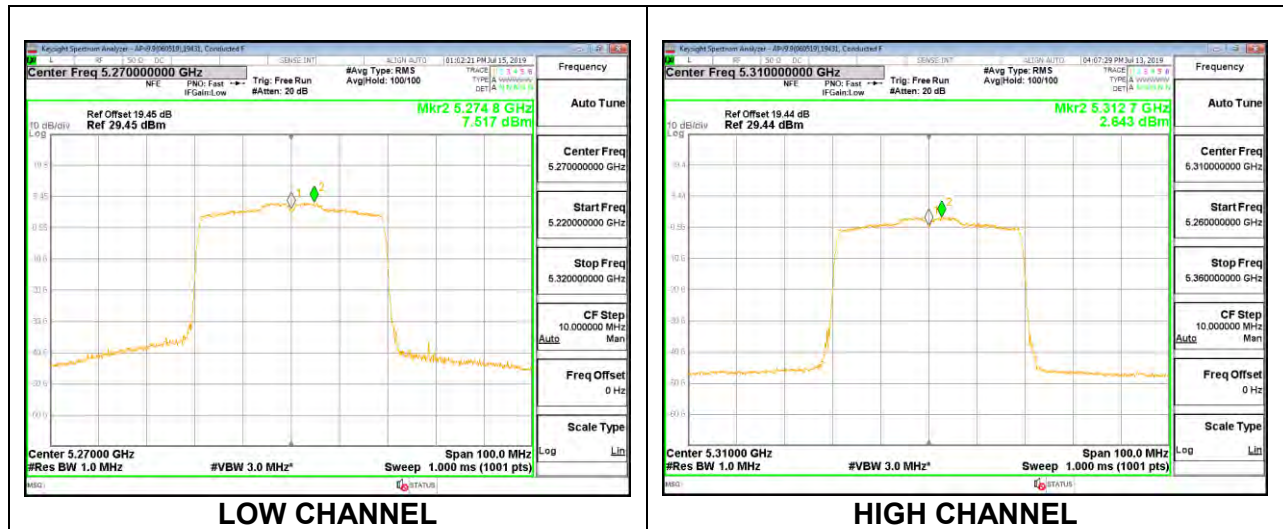

1TX Antenna 6 MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	19.80	-4.00	23.97	11.00
High	5310	22.10	-4.00	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.83	11.83	23.97	-12.14
High	5310	11.79	11.79	24.00	-12.21

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.681	9.68	11.00	-1.32
High	5310	9.210	9.21	11.00	-1.79



1TX Antenna 6 MODE (FCC) – 26 Tones, RU Index 8

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	21.70	-4.0	24.00	11.00
High	5310	22.70	-4.0	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.74	11.74	24.00	-12.26
High	5310	11.76	11.76	24.00	-12.24

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.417	9.42	11.00	-1.58
High	5310	9.513	9.51	11.00	-1.49

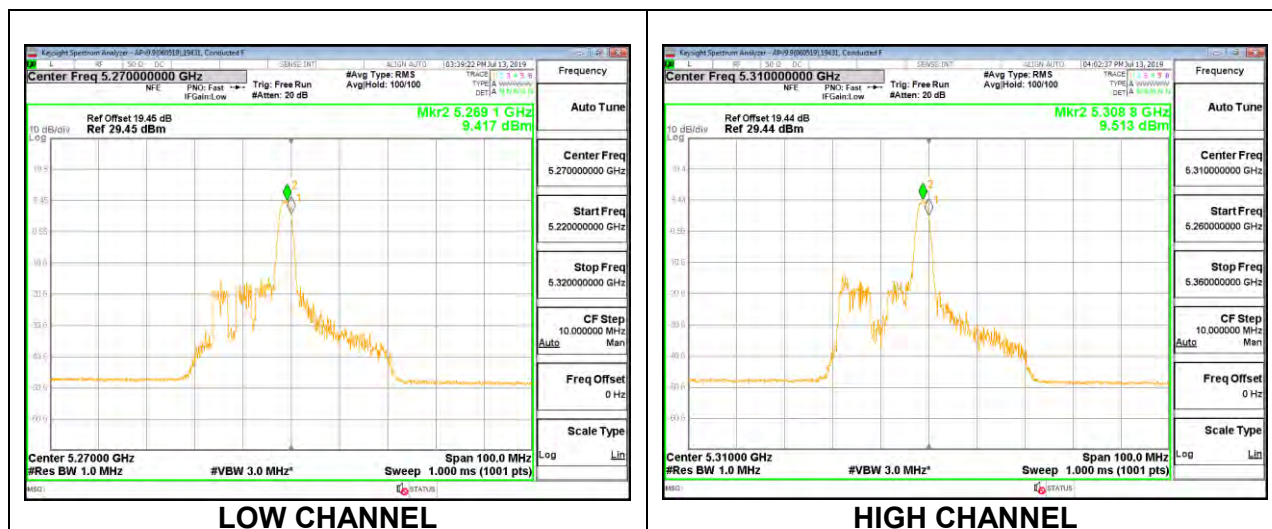

1TX Antenna 6 MODE (FCC) – 26 Tones, RU Index 17

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	19.80	-4.0	23.97	11.00
High	5310	19.70	-4.0	23.94	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.77	11.77	23.97	-12.20
High	5310	11.62	11.62	23.94	-12.32

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.466	9.47	11.00	-1.53
High	5310	8.978	8.98	11.00	-2.02

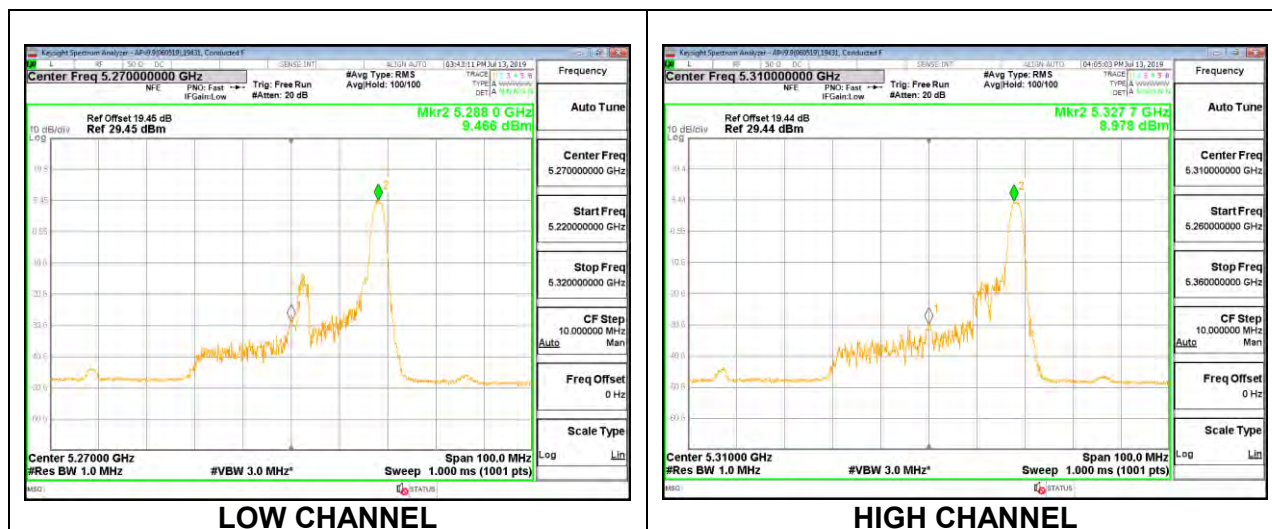

1TX Antenna 5 MODE (FCC) – 484 Tones, RU Index 65

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	41.40	-9.7	24.00	11.00
High	5310	41.20	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	21.17	21.17	24.00	-2.83
High	5310	15.72	15.72	24.00	-8.28

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	8.253	8.25	11.00	-2.75
High	5310	2.626	2.63	11.00	-8.37

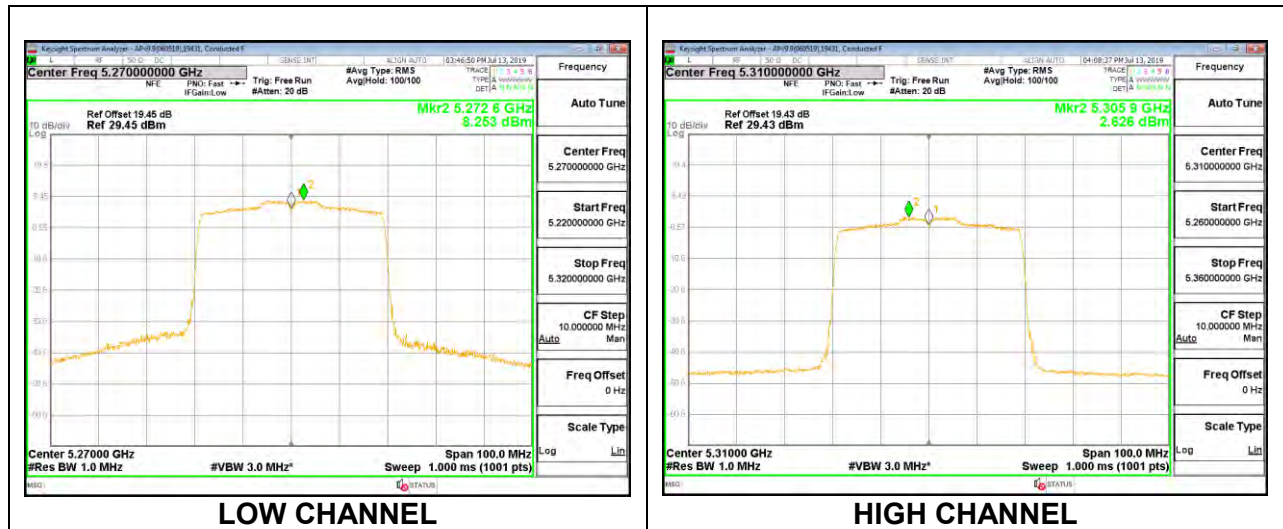

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	20.00	-9.7	24.00	11.00
High	5310	20.00	-9.7	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.72	11.72	24.00	-12.28
High	5310	11.78	11.78	24.00	-12.22

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.125	9.13	11.00	-1.88
High	5310	9.338	9.34	11.00	-1.66



1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 8

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	21.80	-9.7	24.00	11.00
High	5310	22.10	-9.7	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.80	11.80	24.00	-12.20
High	5310	11.66	11.66	24.00	-12.34

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.437	9.44	11.00	-1.56
High	5310	9.102	9.10	11.00	-1.90



1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 17

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	19.50	-9.7	23.90	11.00
High	5310	19.80	-9.7	23.97	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.72	11.72	23.90	-12.18
High	5310	11.69	11.69	23.97	-12.28

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.369	9.37	11.00	-1.63
High	5310	9.204	9.20	11.00	-1.80

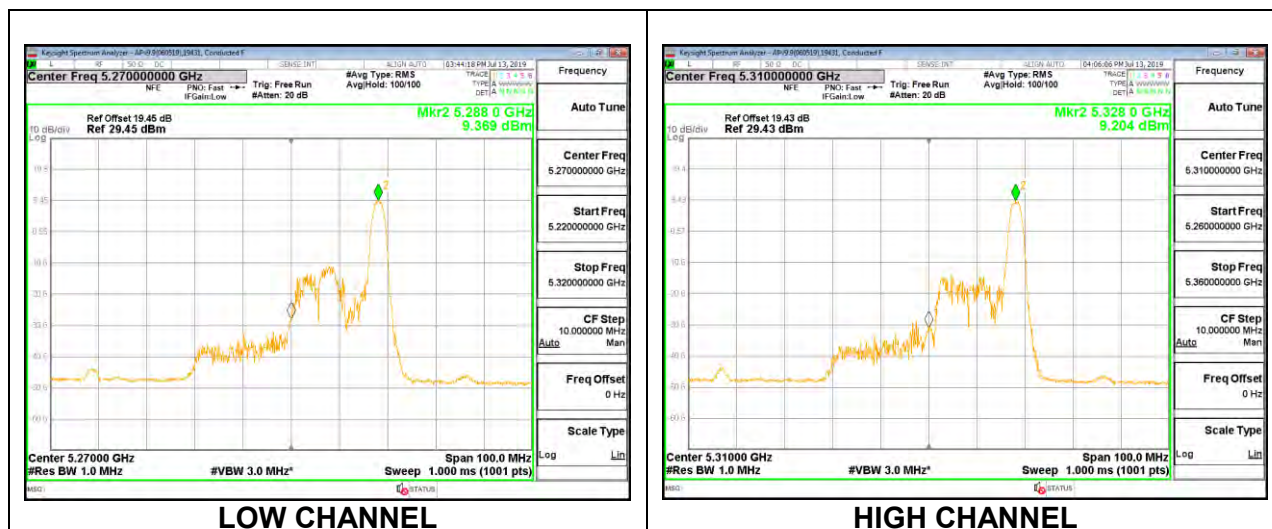

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 484 Tones, RU Index 65

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	40.90	-5.98	-3.38	24.00	11.00
High	5310	41.00	-5.98	-3.38	24.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	19.75	19.72	22.75	24.00	-1.25
High	5310	15.23	15.20	18.23	24.00	-5.77

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.67	6.58	9.64	11.00	-1.36
High	5310	2.26	2.19	5.24	11.00	-5.76

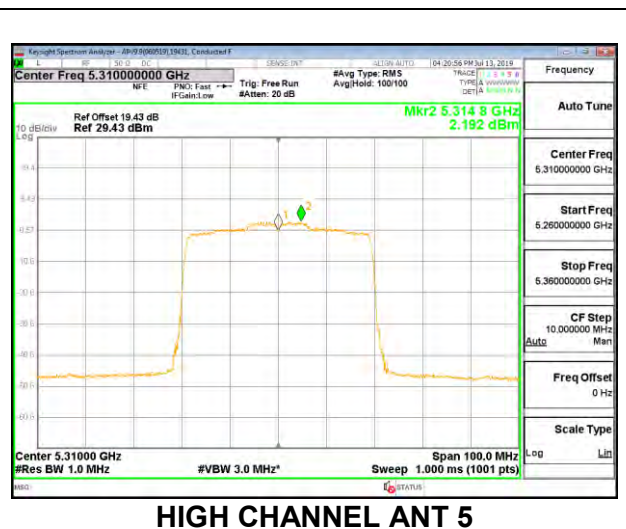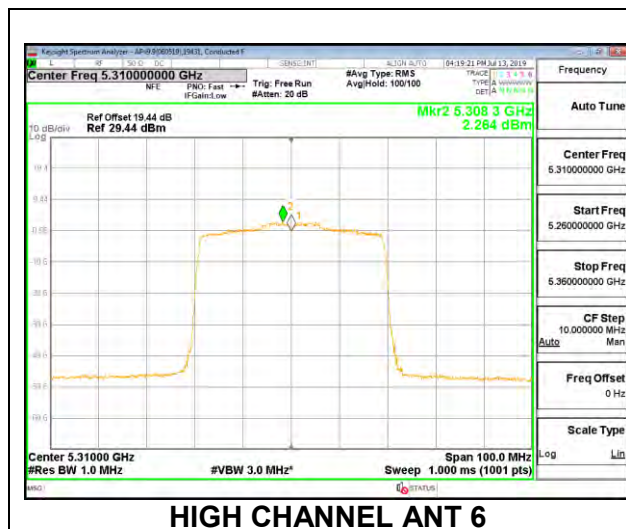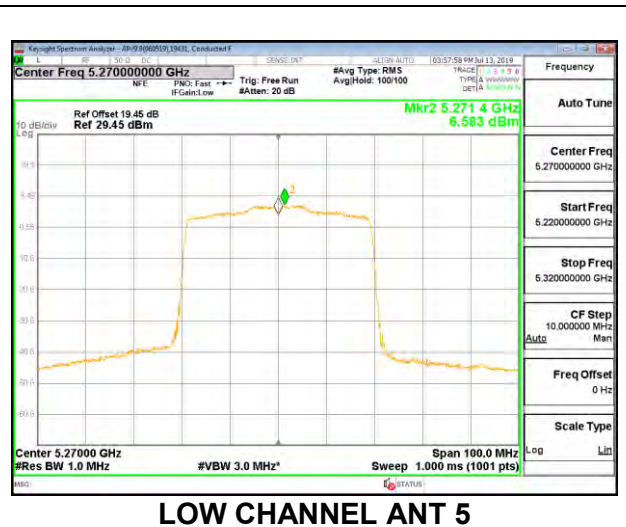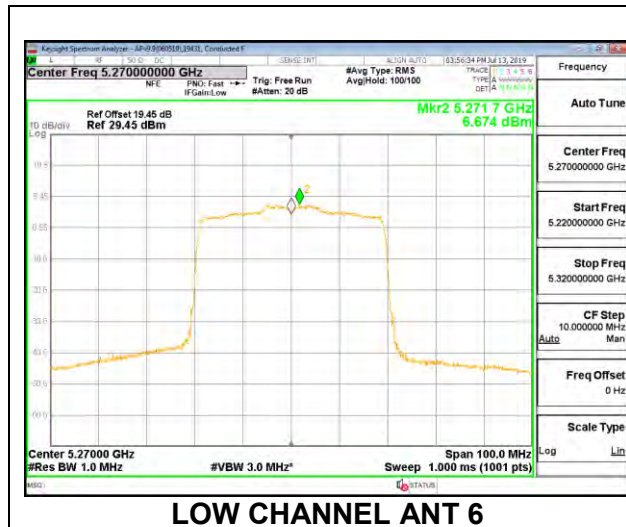

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	19.40	-5.98	-3.38	23.88	11.00
High	5310	19.10	-5.98	-3.38	23.81	11.00




Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	8.75	8.78	11.78	23.88	-12.10
High	5310	8.69	8.73	11.72	23.81	-12.09

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.342	6.429	9.40	11.00	-1.60
High	5310	6.159	6.236	9.21	11.00	-1.79

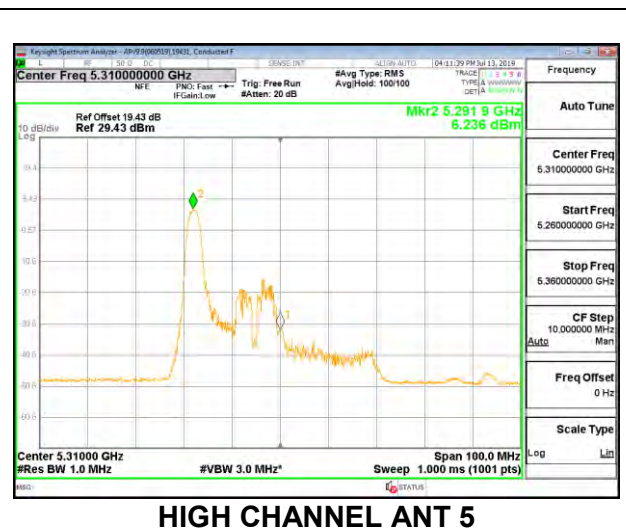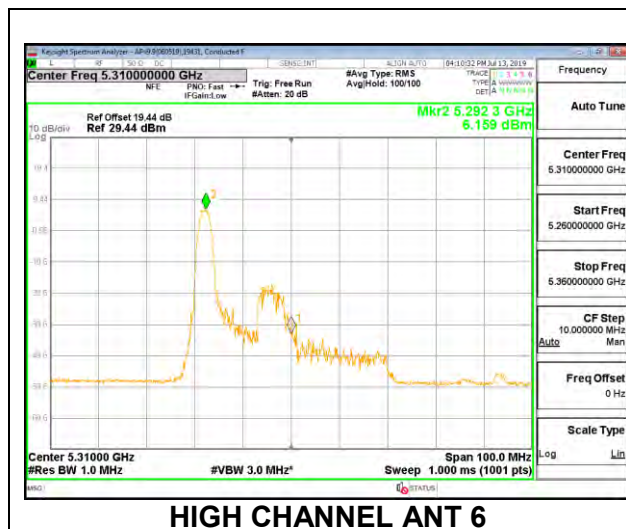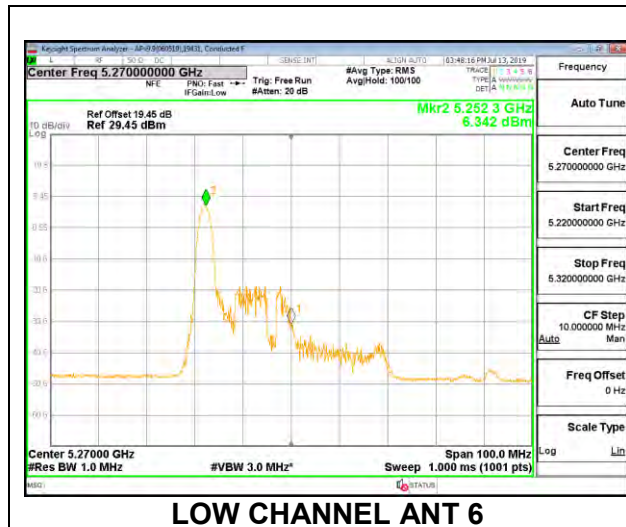

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 8

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	21.30	-5.98	-3.38	24.00	11.00
High	5310	21.50	-5.98	-3.38	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	8.75	8.64	11.71	24.00	-12.29
High	5310	8.72	8.73	11.74	24.00	-12.26

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.67	6.17	9.44	11.00	-1.56
High	5310	6.51	6.54	9.54	11.00	-1.46

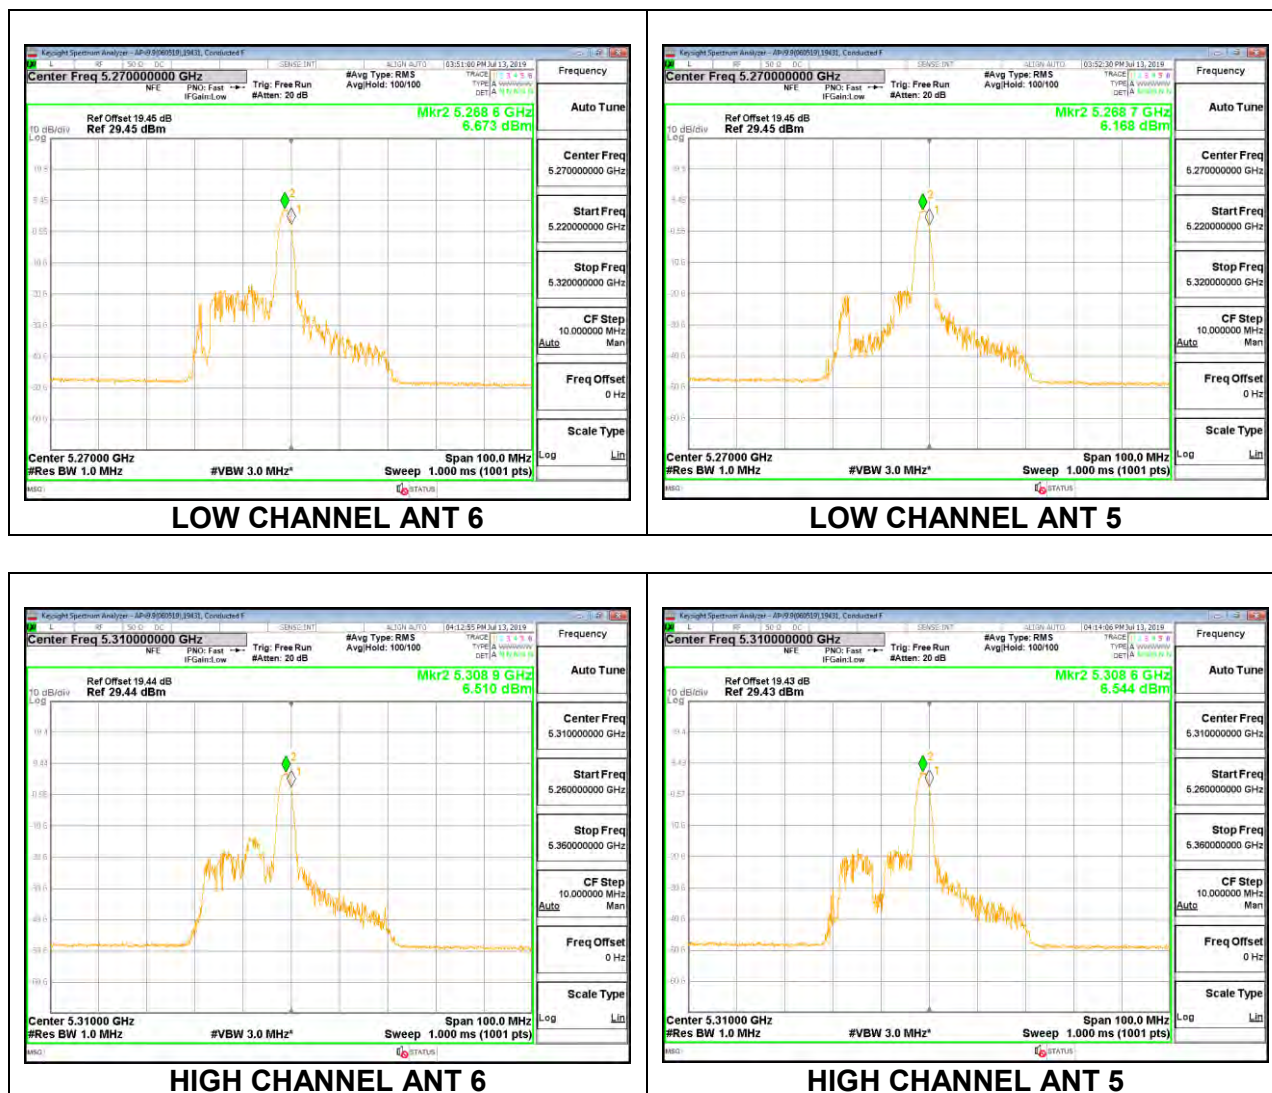

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 17

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	19.20	-5.98	-3.38	23.83	11.00
High	5310	18.70	-5.98	-3.38	23.72	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	8.74	8.73	11.75	23.83	-12.09
High	5310	8.62	8.69	11.67	23.72	-12.05

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.570	6.550	9.57	11.00	-1.43
High	5310	6.246	6.410	9.34	11.00	-1.66

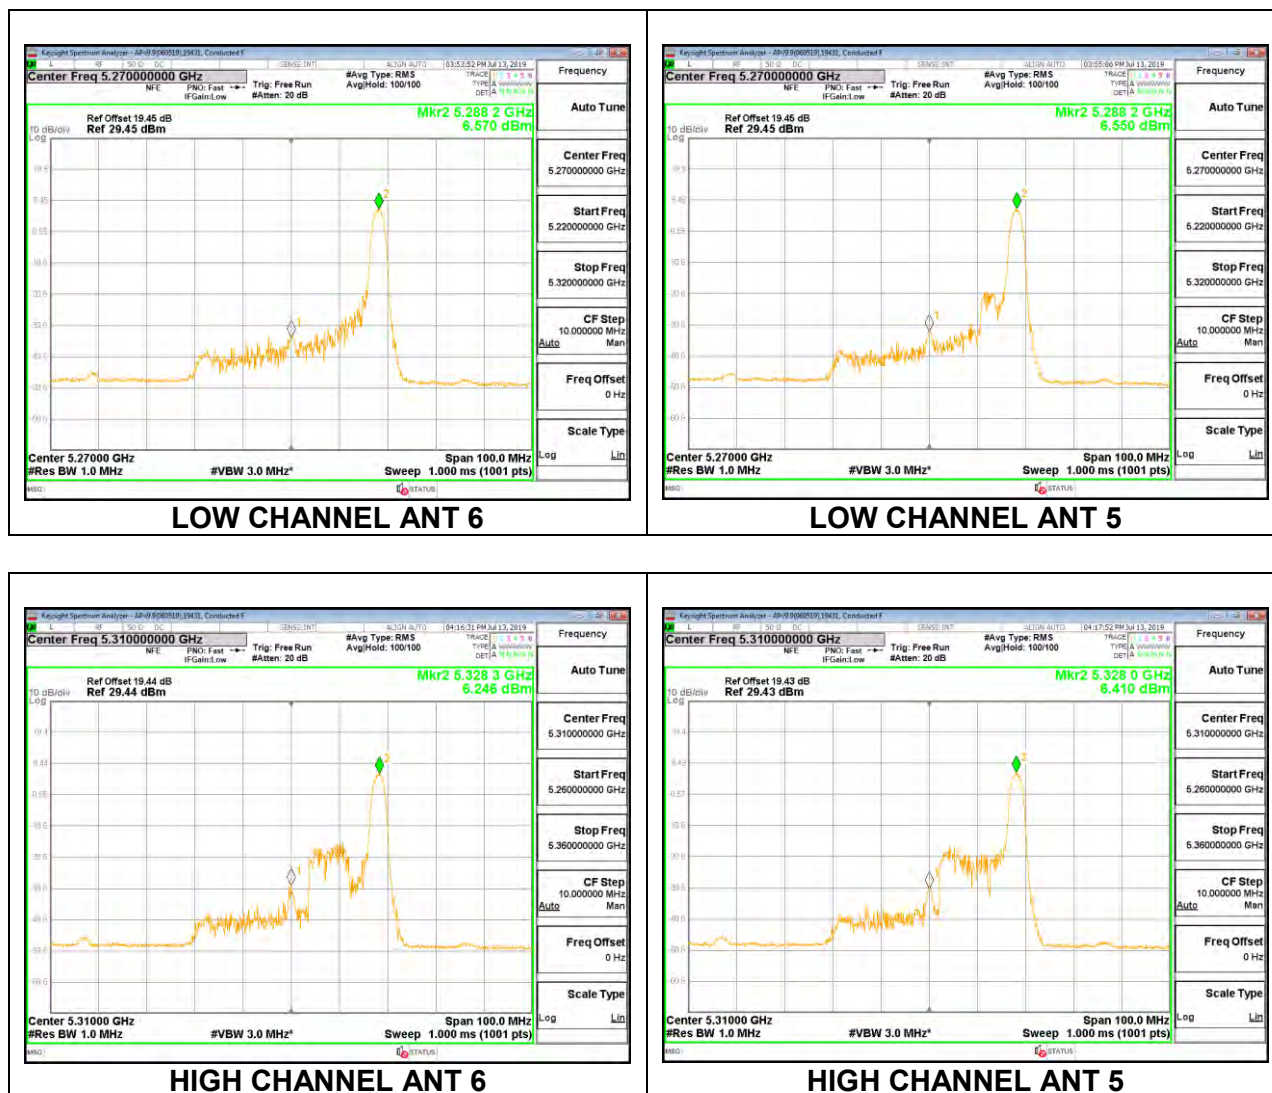

8.5.12. 802.11ax HE80 MODE IN THE 5.3 GHz BAND

1TX Antenna 6 MODE (FCC) – 996 Tones, RU Index 67

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	84.20	-4.0	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.73	15.73	24.00	-8.27

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-0.510	-0.51	11.00	-11.51

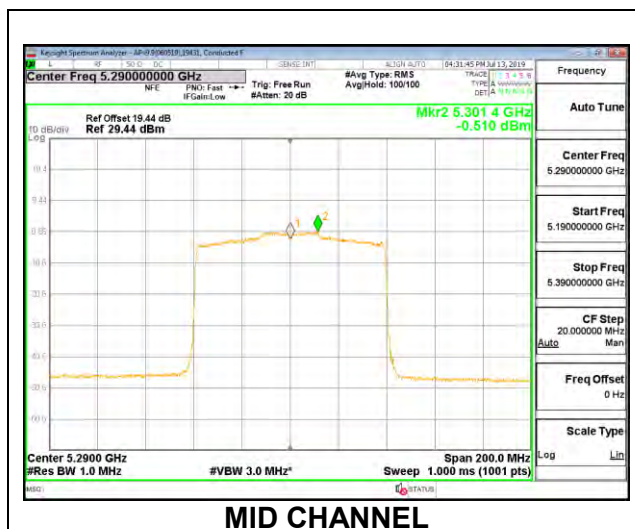

1TX Antenna 6 MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	20.60	-4.0	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.72	11.72	24.00	-12.28

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	9.336	9.34	11.00	-1.66

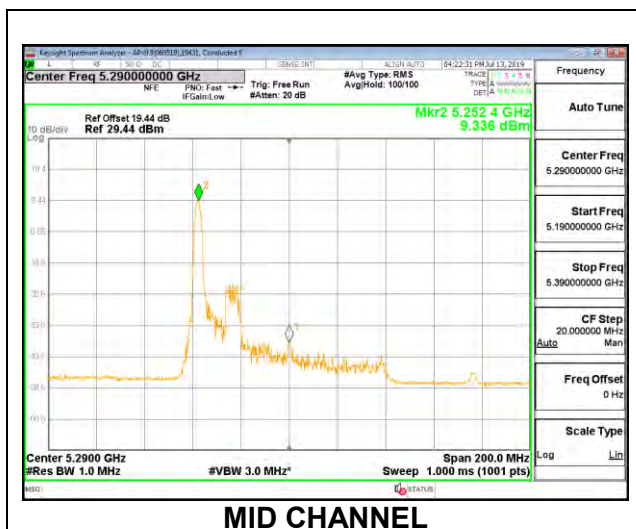

1TX Antenna 6 MODE (FCC) – 26 Tones, RU Index 18

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	41.60	-4.0	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.62	11.62	24.00	-12.38

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	8.539	8.54	11.00	-2.46



1TX Antenna 6 MODE (FCC) – 26 Tones, RU Index 36

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	20.40	-4.0	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.65	11.65	24.00	-12.35

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	9.258	9.26	11.00	-1.74

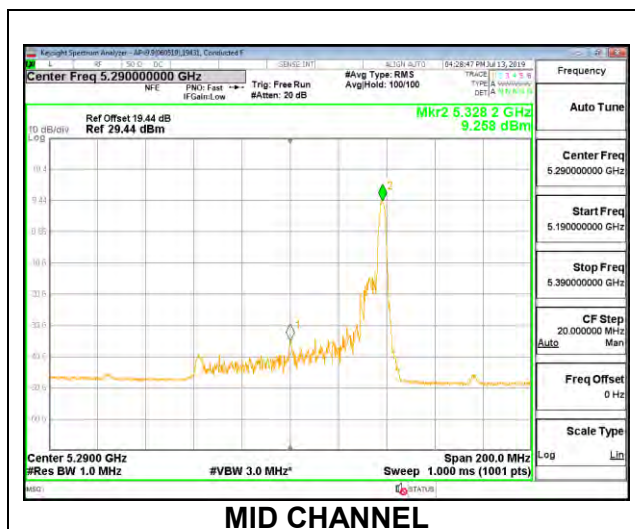

1TX Antenna 5 MODE (FCC) – 996 Tones, RU Index 67

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	83.80	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.71	15.71	24.00	-8.29

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-0.414	-0.41	11.00	-11.41

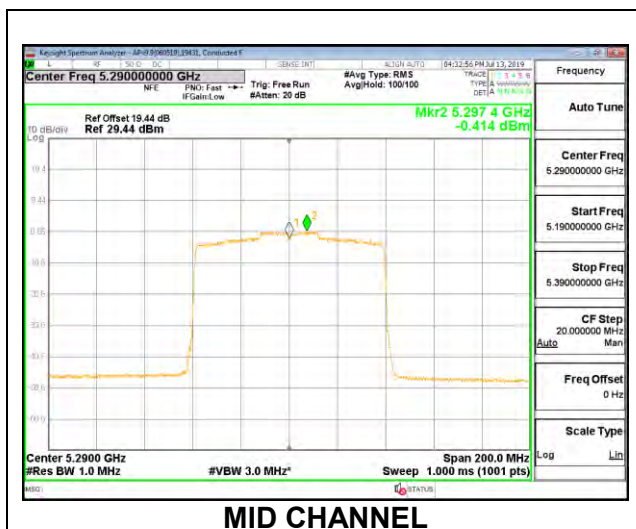

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	20.60	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.72	11.72	24.00	-12.28

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	9.161	9.16	11.00	-1.84

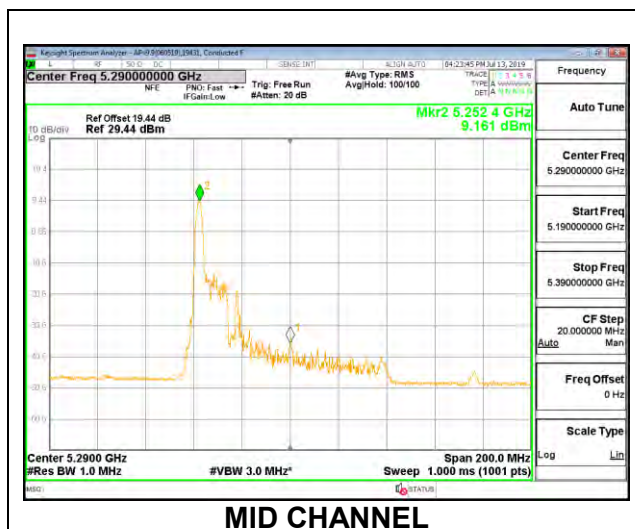

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 18

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	40.20	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.63	11.63	24.00	-12.37

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	7.944	7.94	11.00	-3.06

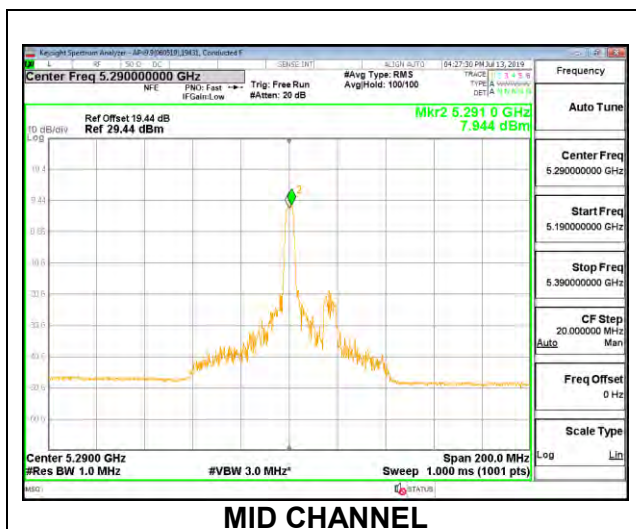

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 36

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	21.00	-9.7	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.73	11.73	24.00	-12.27

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	9.249	9.25	11.00	-1.75

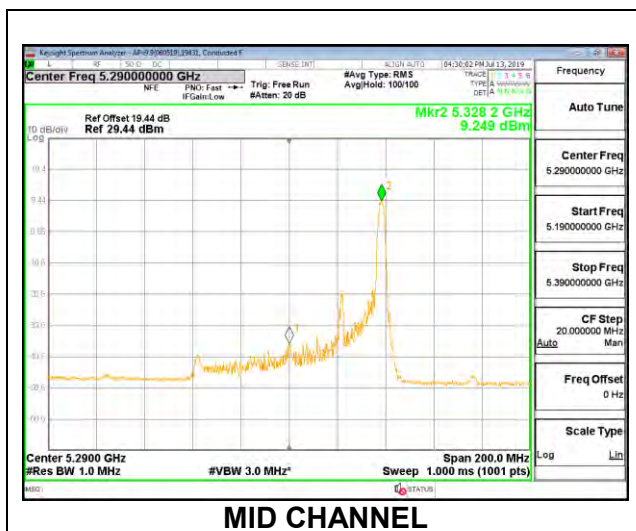

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 996 Tones, RU Index 67

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	84.40	-5.98	-3.38	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	14.74	14.72	17.74	24.00	-6.26

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-1.508	-1.546	1.48	11.00	-9.52

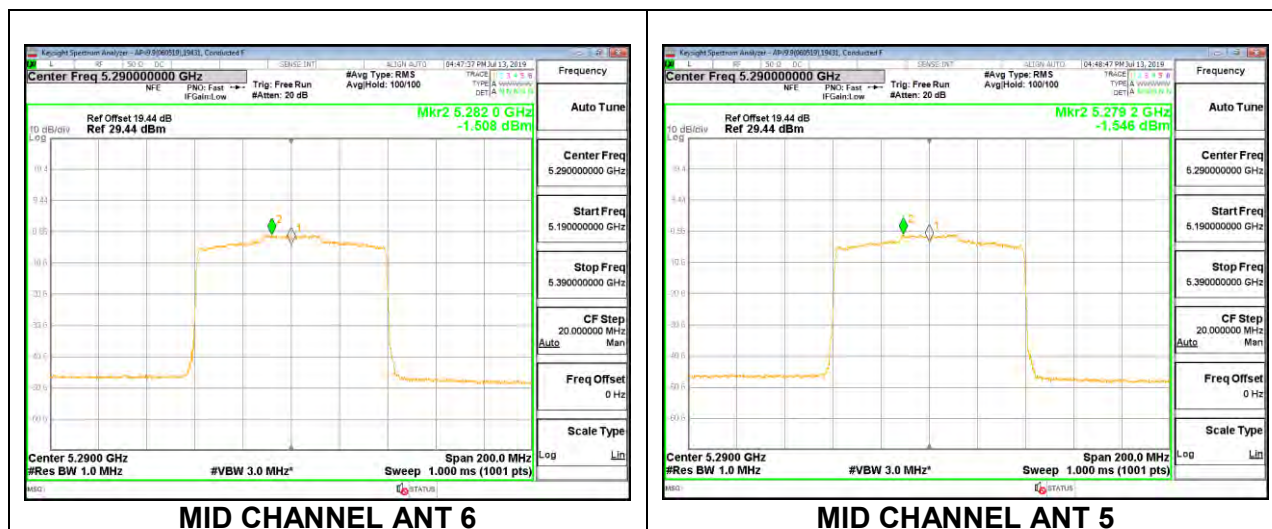

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	19.40	-5.98	-3.38	23.88	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	8.73	8.76	11.76	23.88	-12.12

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	6.072	6.106	9.10	11.00	-1.90

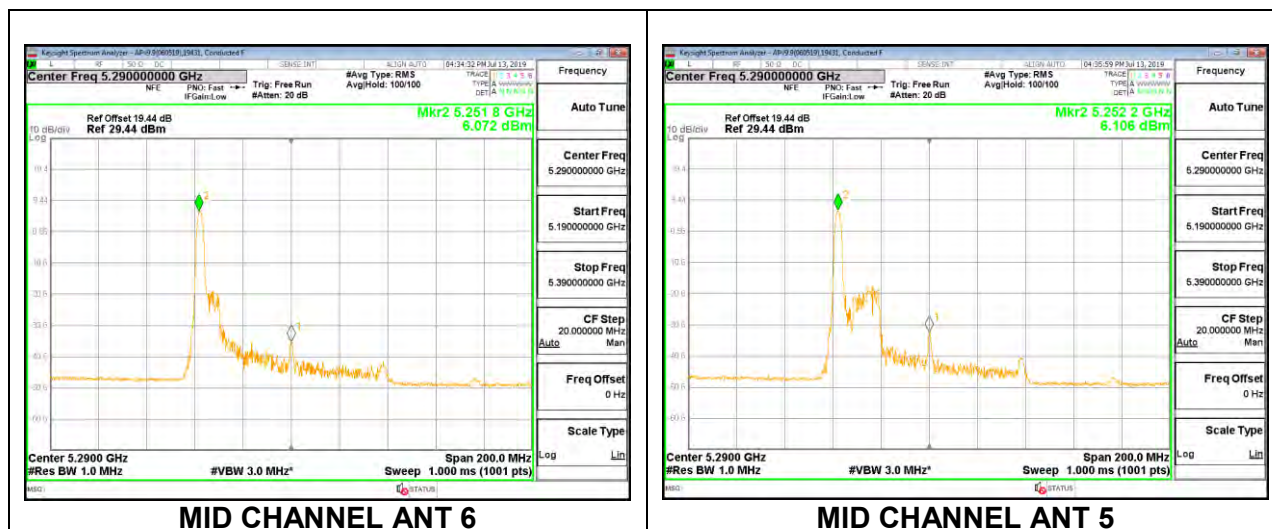

2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 18

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	40.80	-5.98	-3.38	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	8.62	8.65	11.65	24.00	-12.35

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	4.924	5.107	8.03	11.00	-2.97



2TX Antenna 6 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 36

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	20.80	-5.98	-3.38	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	8.67	8.70	11.70	24.00	-12.30

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/1MHz)	ANT 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	5.640	5.875	8.77	11.00	-2.23

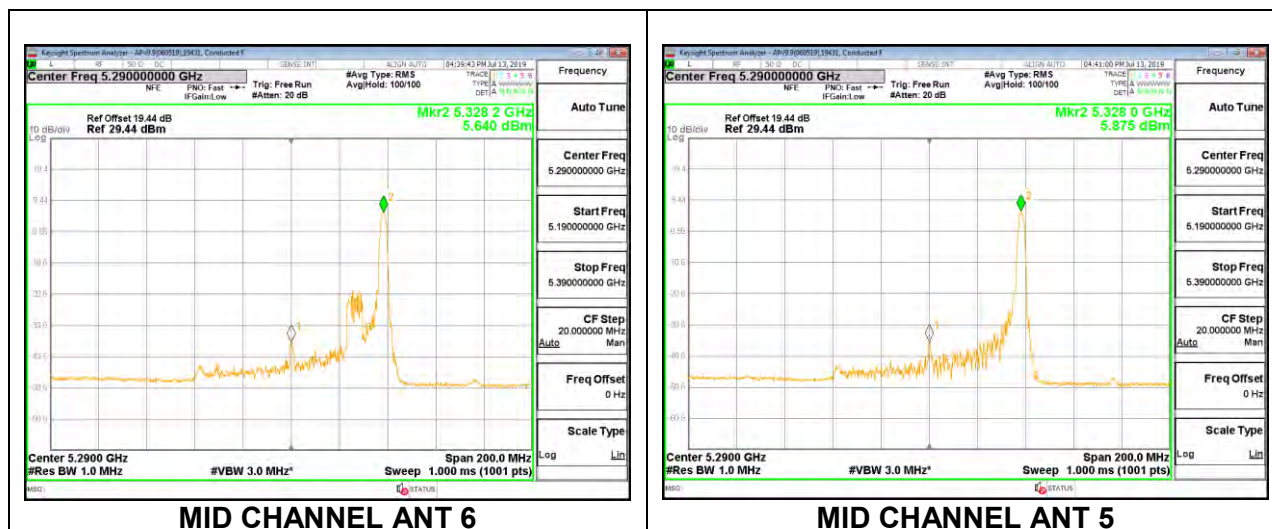

8.5.13. 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX Antenna 6 MODE

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	21.75	17.813	-1.6
Mid	5580	21.90	17.850	-1.6
High	5700	21.65	17.664	-1.6
144	5720	15.73	13.873	-1.6

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/1MHz)	ISED PSD Limit (dBm/1MHz)	PSD Limit (dBm/1MHz)
Low	5500	24.00	23.51	29.51	23.51	11.00	11.00	11.00
Mid	5580	24.00	23.52	29.52	23.52	11.00	11.00	11.00
High	5700	24.00	23.47	29.47	23.47	11.00	11.00	11.00
144	5720	22.97	22.42	28.42	22.42	11.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	18.81	18.81	23.51	-4.70
Mid	5580	19.77	19.77	23.52	-3.75
High	5700	17.73	17.73	23.47	-5.74
144	5720	20.77	20.77	22.42	-1.65

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	8.355	8.355	11.00	-2.65
Mid	5580	9.465	9.465	11.00	-1.54
High	5700	7.868	7.868	11.00	-3.13
144	5720	10.493	10.493	11.00	-0.51

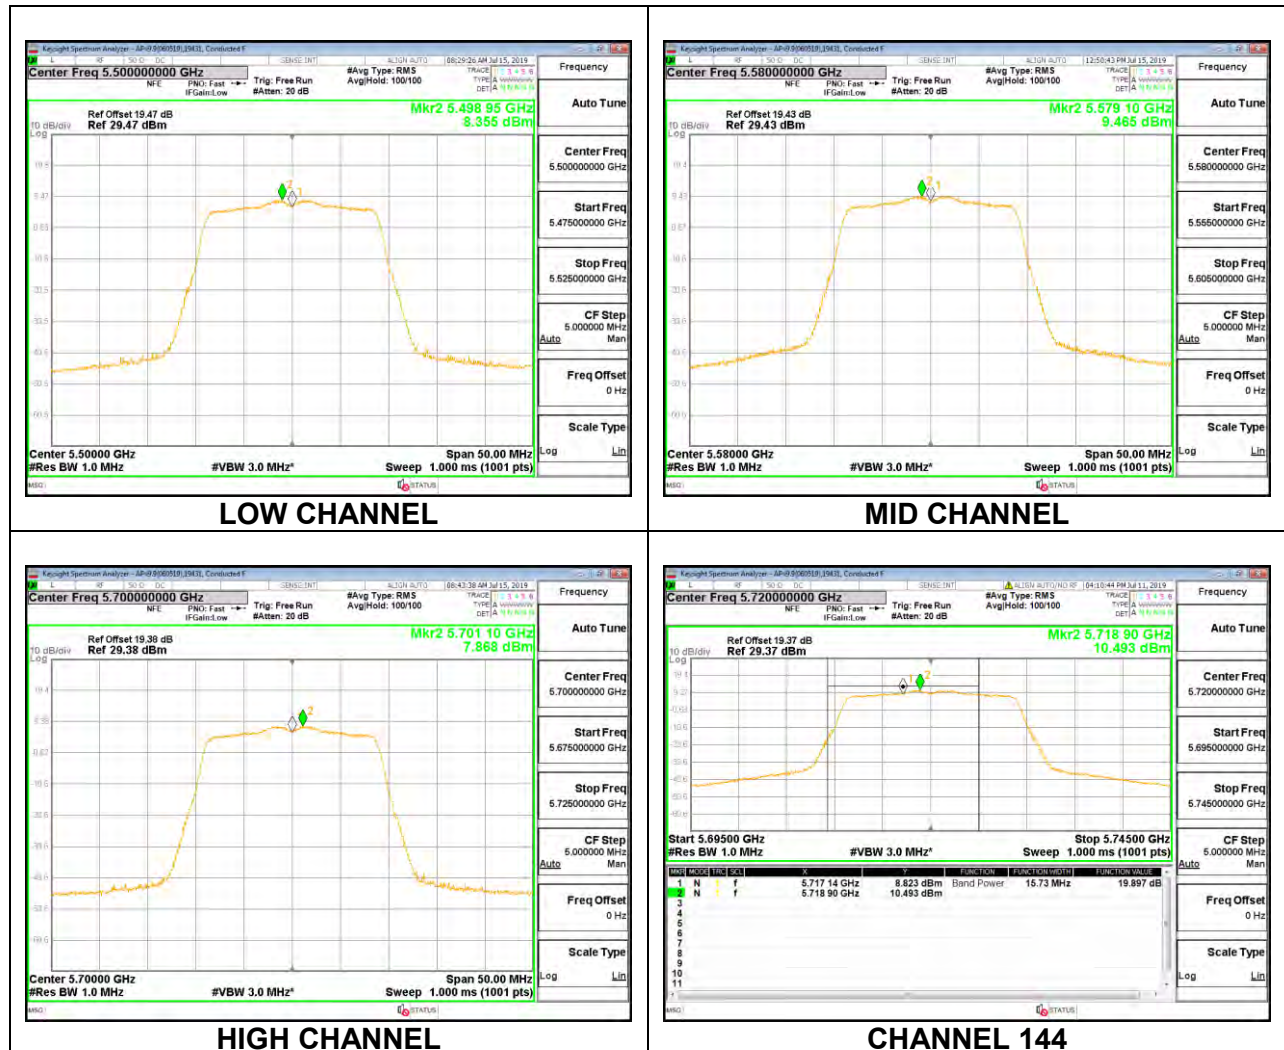

1TX Antenna 5 MODE

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	21.80	17.731	-5.9
Mid	5580	21.65	17.740	-5.9
High	5700	21.60	17.734	-5.9
144	5720	15.93	13.900	-5.9

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/1MHz)	ISED PSD Limit (dBm/1MHz)	PSD Limit (dBm/1MHz)
Low	5500	24.00	23.49	29.49	23.49	11.00	11.00	11.00
Mid	5580	24.00	23.49	29.49	23.49	11.00	11.00	11.00
High	5700	24.00	23.49	29.49	23.49	11.00	11.00	11.00
144	5720	23.02	22.43	28.43	22.43	11.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	18.69	18.69	23.49	-4.80
Mid	5580	20.82	20.82	23.49	-2.67
High	5700	17.71	17.71	23.49	-5.78
144	5720	20.69	20.69	22.43	-1.74

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	8.333	8.333	11.00	-2.67
Mid	5580	10.875	10.875	11.00	-0.13
High	5700	7.728	7.728	11.00	-3.27
144	5720	10.696	10.696	11.00	-0.30

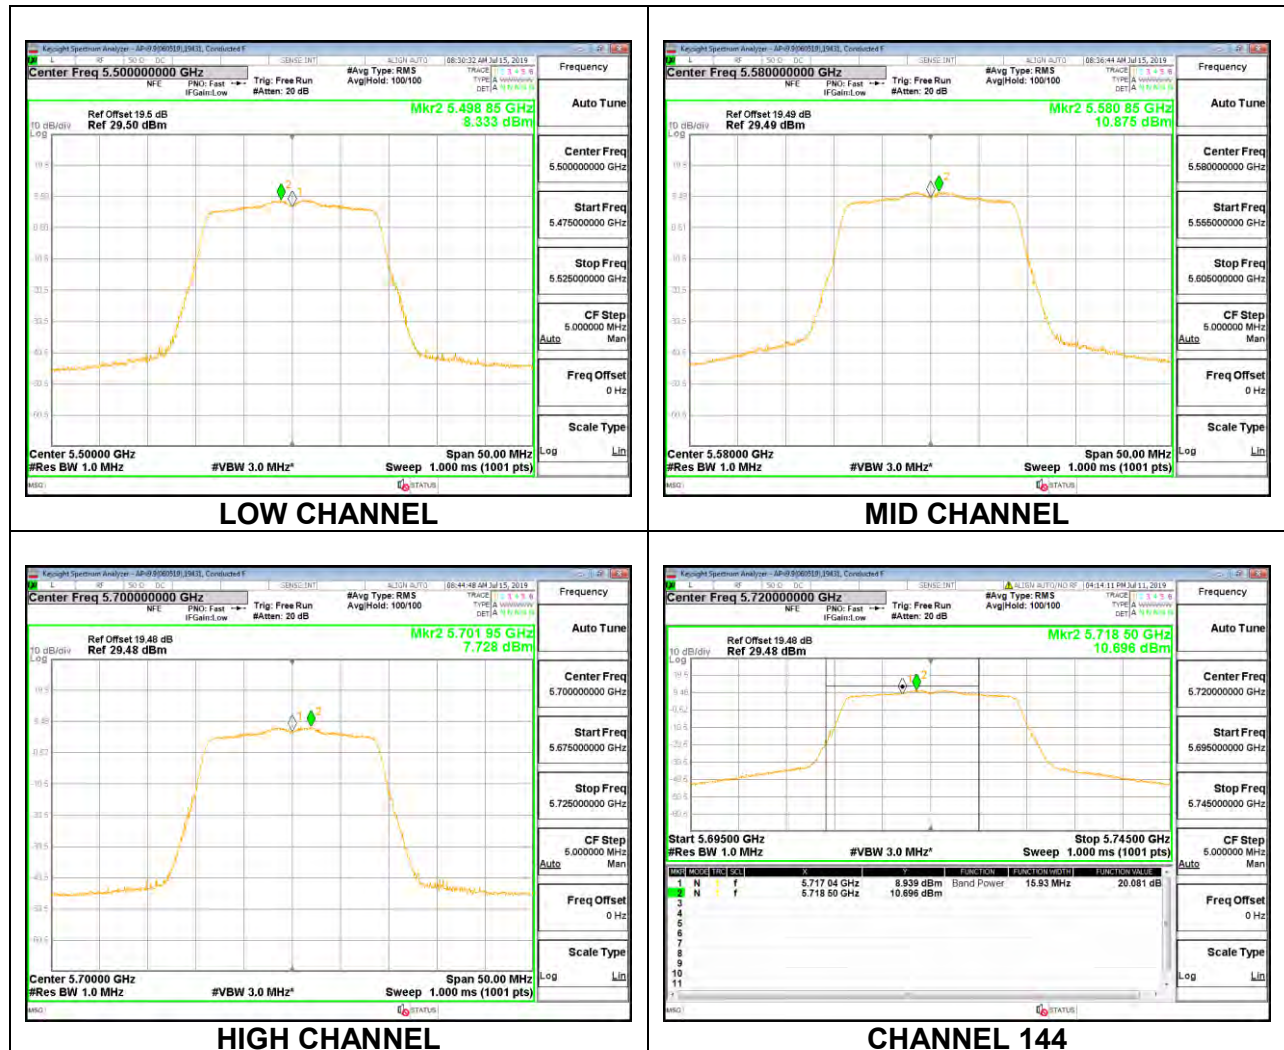

2TX Antenna 6 + Antenna 5 CDD MODE

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5500	21.55	17.594	-3.24	-0.48
Mid	5580	21.50	17.716	-3.24	-0.48
High	5700	21.65	17.614	-3.24	-0.48
144	5720	15.83	13.882	-3.24	-0.48

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5500	24.00	23.45	29.45	23.45	11.00	11.00	11.00
Mid	5580	24.00	23.48	29.48	23.48	11.00	11.00	11.00
High	5700	24.00	23.46	29.46	23.46	11.00	11.00	11.00
144	5720	22.99	22.42	28.42	22.42	11.00	11.00	11.00







Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	ANT 6 Meas Power (dBm)	ANT 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	17.68	17.64	20.67	23.45	-2.78
Mid	5580	17.75	17.73	20.75	23.48	-2.73
High	5700	17.23	17.18	20.22	23.46	-3.24
144	5720	17.80	17.82	20.82	22.42	-1.60

PSD Results

Channel	Frequency (MHz)	ANT 6 Meas PSD (dBm/ 1MHz)	ANT 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	7.554	7.455	10.515	11.00	-0.48
Mid	5580	7.889	7.752	10.831	11.00	-0.17
High	5700	7.396	7.185	10.302	11.00	-0.70
144	5720	7.604	8.071	10.854	11.00	-0.15

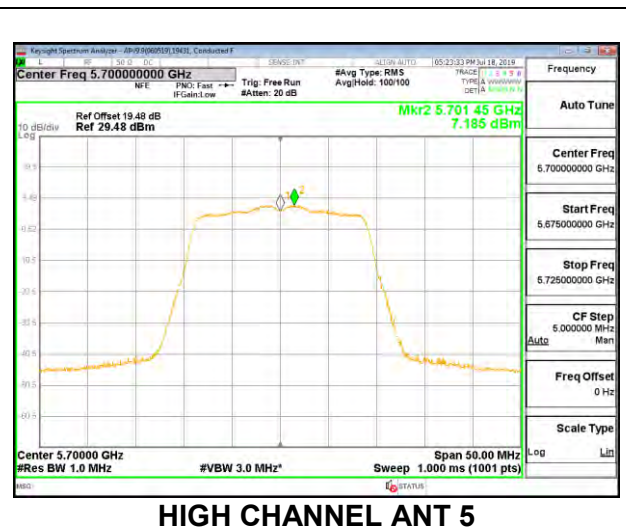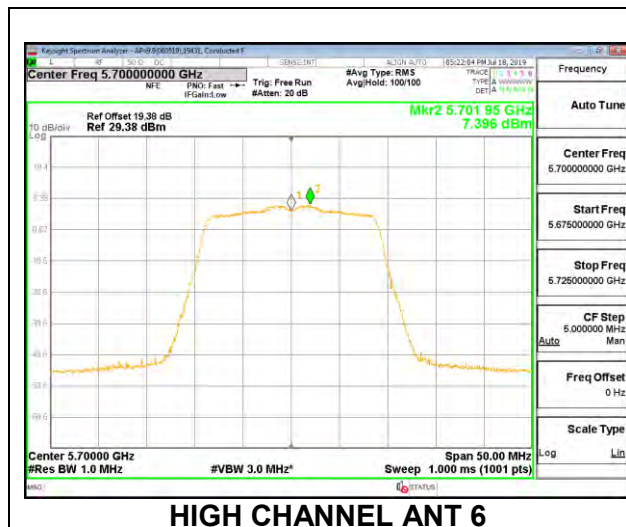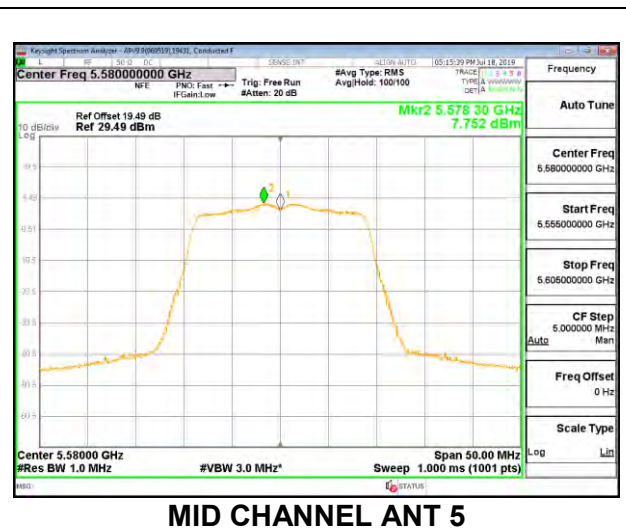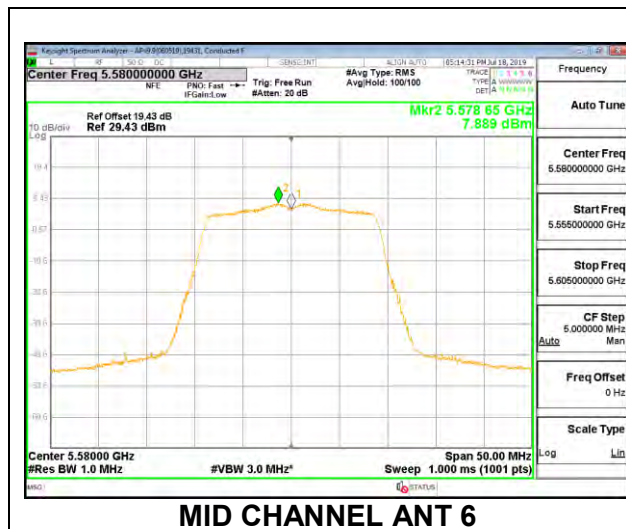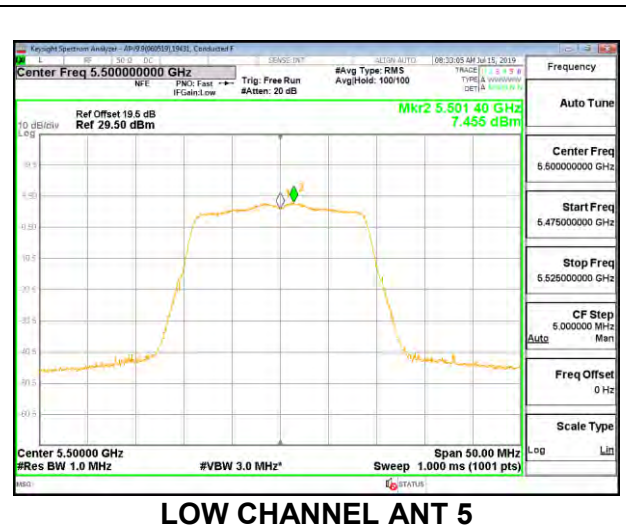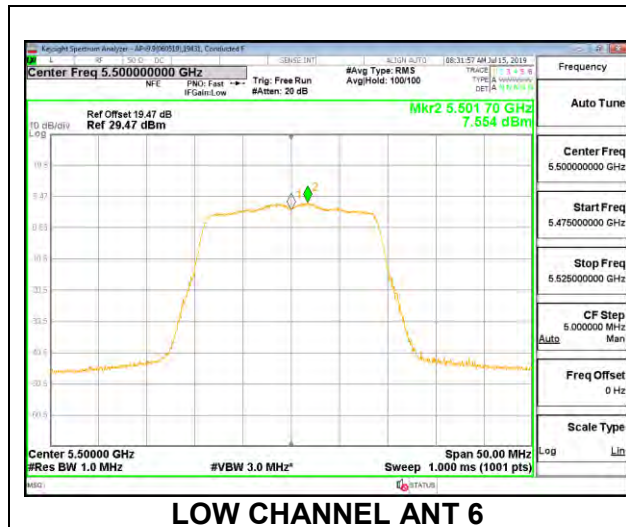

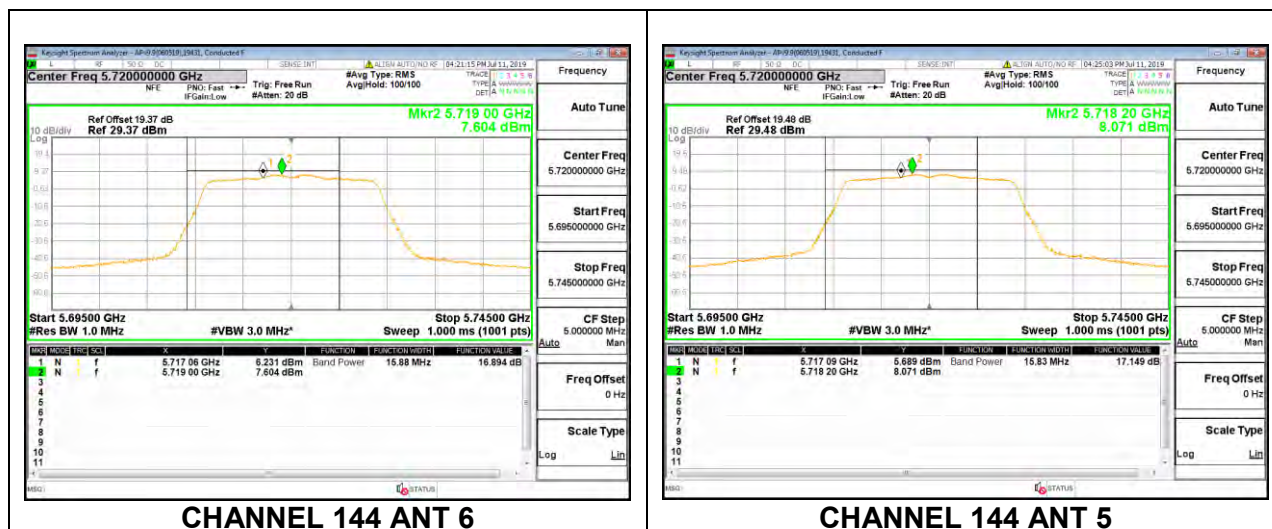

8.5.14. 802.11n HT40 MODE IN THE 5.6 GHz BAND

1TX Antenna 6 MODE

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5510	41.50	36.116	-1.6
Mid	5550	41.50	36.046	-1.6
High	5670	41.40	36.040	-1.6
142	5710	41.40	36.156	-1.6

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5510	24.00	24.00	30.00	24.00	11.00	11.00	11.00
Mid	5550	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5670	24.00	24.00	30.00	24.00	11.00	11.00	11.00
142	5710	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	17.22	17.22	24.00	-6.78
Mid	5550	19.18	19.18	24.00	-4.82
High	5670	20.20	20.20	24.00	-3.80
142	5710	21.23	21.23	24.00	-2.77

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	4.041	4.13	11.00	-6.87
Mid	5550	6.317	6.41	11.00	-4.59
High	5670	7.650	7.74	11.00	-3.26
142	5710	8.164	8.25	11.00	-2.75