



DFS PORTION of FCC 47 CFR PART 15 SUBPART E  
DFS PORTION of INDUSTRY CANADA RSS-247 ISSUE 2

**CERTIFICATION TEST REPORT**

**FOR**

**SMARTPHONE**

**MODEL NUMBER: A2218**

**FCC ID: BCG-E3308A**

**IC: 579C-E3308A**

**REPORT NUMBER: 12943451-E13V1**

**ISSUE DATE: AUGUST 21, 2019**

*Prepared for*

**APPLE, INC.**

**1 APPLE PARK WAY**

**CUPERTINO, CA 95014, U.S.A.**

*Prepared by*

**UL VERIFICATION SERVICES INC.**

**47173 BENICIA STREET**

**FREMONT, CA 94538, U.S.A.**

**TEL: (510) 319-4000**

**FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

| <u>Rev.</u> | <u>Issue<br/>Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-----------------------|------------------|-------------------|
| V1          | 08/21/2019            | Initial Issue    | Doug Anderson     |

## TABLE OF CONTENTS

|                                                                                 |          |
|---------------------------------------------------------------------------------|----------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>                                     | <b>6</b> |
| <b>2. TEST METHODOLOGY .....</b>                                                | <b>7</b> |
| <b>3. REFERENCE DOCUMENTS .....</b>                                             | <b>7</b> |
| <b>4. FACILITIES AND ACCREDITATION .....</b>                                    | <b>7</b> |
| <b>5. CALIBRATION AND UNCERTAINTY .....</b>                                     | <b>7</b> |
| 5.1. MEASURING INSTRUMENT CALIBRATION .....                                     | 7        |
| 5.2. SAMPLE CALCULATION .....                                                   | 7        |
| 5.3. MEASUREMENT UNCERTAINTY .....                                              | 7        |
| <b>6. DYNAMIC FREQUENCY SELECTION .....</b>                                     | <b>8</b> |
| 6.1. OVERVIEW .....                                                             | 8        |
| 6.1.1. LIMITS .....                                                             | 8        |
| 6.1.2. TEST AND MEASUREMENT SYSTEM .....                                        | 12       |
| 6.1.3. TEST AND MEASUREMENT SOFTWARE .....                                      | 14       |
| 6.1.4. TEST ROOM ENVIRONMENT .....                                              | 14       |
| 6.1.5. SETUP OF EUT (CLIENT MODE) .....                                         | 15       |
| 6.1.6. SETUP OF EUT (CLIENT TO CLIENT MODE) .....                               | 16       |
| 6.1.7. SETUP OF EUT (PEER TO PEER MODE) .....                                   | 17       |
| 6.1.8. DESCRIPTION OF EUT .....                                                 | 19       |
| 6.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH .....                             | 22       |
| 6.2.1. TEST CHANNEL .....                                                       | 22       |
| 6.2.2. RADAR WAVEFORM AND TRAFFIC .....                                         | 22       |
| 6.2.3. OVERLAPPING CHANNEL TESTS .....                                          | 25       |
| 6.2.4. MOVE AND CLOSING TIME .....                                              | 25       |
| 6.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH .....                             | 29       |
| 6.3.1. TEST CHANNEL .....                                                       | 29       |
| 6.3.2. RADAR WAVEFORM AND TRAFFIC .....                                         | 29       |
| 6.3.3. OVERLAPPING CHANNEL TESTS .....                                          | 32       |
| 6.3.4. MOVE AND CLOSING TIME .....                                              | 32       |
| 6.4. CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH .....                             | 36       |
| 6.4.1. TEST CHANNEL .....                                                       | 36       |
| 6.4.2. RADAR WAVEFORM AND TRAFFIC .....                                         | 36       |
| 6.4.3. OVERLAPPING CHANNEL TESTS .....                                          | 39       |
| 6.4.4. MOVE AND CLOSING TIME .....                                              | 39       |
| 6.4.5. 30-MINUTE NON-OCCUPANCY PERIOD .....                                     | 43       |
| 6.5. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz<br>BANDWIDTH ..... | 44       |
| 6.5.1. TEST CHANNEL .....                                                       | 44       |
| 6.5.2. RADAR WAVEFORM AND TRAFFIC .....                                         | 44       |
| 6.5.3. OVERLAPPING CHANNEL TESTS .....                                          | 47       |
| 6.5.4. MOVE AND CLOSING TIME .....                                              | 47       |

|         |                                                          |     |
|---------|----------------------------------------------------------|-----|
| 6.6.    | CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz  |     |
|         | BANDWIDTH.....                                           | 51  |
| 6.6.1.  | TEST CHANNEL .....                                       | 51  |
| 6.6.2.  | RADAR WAVEFORM AND TRAFFIC .....                         | 51  |
| 6.6.3.  | OVERLAPPING CHANNEL TESTS .....                          | 54  |
| 6.6.4.  | MOVE AND CLOSING TIME .....                              | 54  |
| 6.7.    | CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz  |     |
|         | BANDWIDTH.....                                           | 58  |
| 6.7.1.  | TEST CHANNEL .....                                       | 58  |
| 6.7.2.  | RADAR WAVEFORM AND TRAFFIC .....                         | 58  |
| 6.7.3.  | OVERLAPPING CHANNEL TESTS .....                          | 61  |
| 6.7.4.  | MOVE AND CLOSING TIME .....                              | 61  |
| 6.7.5.  | 30-MINUTE NON-OCCUPANCY PERIOD .....                     | 65  |
| 6.8.    | PEER TO PEER MODE EUT RESULTS FOR 20 MHz BANDWIDTH.....  | 66  |
| 6.8.1.  | TEST CHANNEL .....                                       | 66  |
| 6.8.2.  | RADAR WAVEFORM AND TRAFFIC .....                         | 66  |
| 6.8.3.  | OVERLAPPING CHANNEL TESTS .....                          | 69  |
| 6.8.4.  | MOVE AND CLOSING TIME .....                              | 69  |
| 6.9.    | PEER TO PEER MODE EUT RESULTS FOR 40 MHz BANDWIDTH.....  | 73  |
| 6.9.1.  | TEST CHANNEL .....                                       | 73  |
| 6.9.2.  | RADAR WAVEFORM AND TRAFFIC .....                         | 73  |
| 6.9.3.  | OVERLAPPING CHANNEL TESTS .....                          | 76  |
| 6.9.4.  | MOVE AND CLOSING TIME .....                              | 76  |
| 6.10.   | PEER TO PEER MODE EUT RESULTS FOR 80 MHz BANDWIDTH ..... | 80  |
| 6.10.1. | TEST CHANNEL .....                                       | 80  |
| 6.10.2. | RADAR WAVEFORM AND TRAFFIC .....                         | 80  |
| 6.10.3. | OVERLAPPING CHANNEL TESTS .....                          | 83  |
| 6.10.4. | MOVE AND CLOSING TIME.....                               | 83  |
| 6.10.5. | 30-MINUTE NON-OCCUPANCY PERIOD .....                     | 87  |
| 6.11.   | PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 20 MHz   |     |
|         | BANDWIDTH.....                                           | 88  |
| 6.11.1. | TEST CHANNEL .....                                       | 88  |
| 6.11.2. | RADAR WAVEFORM AND TRAFFIC .....                         | 88  |
| 6.11.3. | OVERLAPPING CHANNEL TESTS .....                          | 91  |
| 6.11.4. | MOVE AND CLOSING TIME.....                               | 91  |
| 6.12.   | PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 40 MHz   |     |
|         | BANDWIDTH.....                                           | 95  |
| 6.12.1. | TEST CHANNEL .....                                       | 95  |
| 6.12.2. | RADAR WAVEFORM AND TRAFFIC .....                         | 95  |
| 6.12.3. | OVERLAPPING CHANNEL TESTS .....                          | 98  |
| 6.12.4. | MOVE AND CLOSING TIME.....                               | 98  |
| 6.13.   | PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 80 MHz   |     |
|         | BANDWIDTH.....                                           | 102 |
| 6.13.1. | TEST CHANNEL .....                                       | 102 |
| 6.13.2. | RADAR WAVEFORM AND TRAFFIC .....                         | 102 |
| 6.13.3. | OVERLAPPING CHANNEL TESTS .....                          | 105 |
| 6.13.4. | MOVE AND CLOSING TIME.....                               | 105 |
| 6.13.5. | 30-MINUTE NON-OCCUPANCY PERIOD .....                     | 109 |

**7. SETUP PHOTOS.....110**

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE, INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A.

**EUT DESCRIPTION:** SMARTPHONE

**MODEL:** A2218

**SERIAL NUMBER:** G6TYM038MM3M

**DATE TESTED:** JUNE 03 and 04, 2019

| APPLICABLE STANDARDS                           |              |
|------------------------------------------------|--------------|
| STANDARD                                       | TEST RESULTS |
| DFS Portion of CFR 47 Part 15 Subpart E        | Complies     |
| DFS Portion of INDUSTRY CANADA RSS-247 Issue 2 | Complies     |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For  
UL Verification Services Inc. By:



HENRY LAU  
Project Engineer  
CONSUMER TECHNOLOGY DIVISION  
UL Verification Services Inc.

Prepared By:



DOUG ANDERSON  
Test Engineer  
CONSUMER TECHNOLOGY DIVISION  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the DFS portion of FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033, KDB 905462 D02 and D03 and RSS-247 Issue 2.

## 3. REFERENCE DOCUMENTS

Measurements of transmitter parameters as referenced in this report are documented in UL Verification Services report number 12943451-E4V2 and 12943451-E5V1.

## 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Specific facilities are also identified in the test results sections.

The test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers are covered under Industry Canada company address and respective code.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty level has been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|-----------|-------------|
| Time      | ± 0.02 %    |

The Uncertainty figure is valid to a confidence level of 95%.

## 6. DYNAMIC FREQUENCY SELECTION

### 6.1. OVERVIEW

#### 6.1.1. LIMITS

##### INDUSTRY CANADA

IC RSS-247 is closely harmonized with FCC Part 15 DFS rules. The deviations are as follows:

RSS-247 Issue 2

**Note:** For the band 5600–5650 MHz, no operation is permitted.

Until further notice, devices subject to this annex shall not be capable of transmitting in the band 5600–5650 MHz. This restriction is for the protection of Environment Canada weather radars operating in this band.

##### FCC

§15.407 (h), FCC KDB 905462 D02 “COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION” and KDB 905462 D03 “U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY”.



**Table 1: Applicability of DFS requirements prior to use of a channel**

| Requirement                     | Operational Mode |                                  |                               |
|---------------------------------|------------------|----------------------------------|-------------------------------|
|                                 | Master           | Client (without radar detection) | Client (with radar detection) |
| Non-Occupancy Period            | Yes              | Not required                     | Yes                           |
| DFS Detection Threshold         | Yes              | Not required                     | Yes                           |
| Channel Availability Check Time | Yes              | Not required                     | Not required                  |
| U-NII Detection Bandwidth       | Yes              | Not required                     | Yes                           |

**Table 2: Applicability of DFS requirements during normal operation**

| Requirement                       | Operational Mode |                      |                   |
|-----------------------------------|------------------|----------------------|-------------------|
|                                   | Master           | Client (without DFS) | Client (with DFS) |
| DFS Detection Threshold           | Yes              | Not required         | Yes               |
| Channel Closing Transmission Time | Yes              | Yes                  | Yes               |
| Channel Move Time                 | Yes              | Yes                  | Yes               |
| U-NII Detection Bandwidth         | Yes              | Not required         | Yes               |

| Additional requirements for devices with multiple bandwidth modes                                                                                                                                                                                                                                                                                                                | Master Device or Client with Radar DFS | Client (without DFS)                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|------------------------------------------------------|
| <i>U-NII Detection Bandwidth and Statistical Performance Check</i>                                                                                                                                                                                                                                                                                                               | All BW modes must be tested            | Not required                                         |
| <i>Channel Move Time and Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                                                   | Test using widest BW mode available    | Test using the widest BW mode available for the link |
| <i>All other tests</i>                                                                                                                                                                                                                                                                                                                                                           | Any single BW mode                     | Not required                                         |
| <b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequency between the bonded 20 MHz channel blocks. |                                        |                                                      |

**Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring**

| Maximum Transmit Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Value<br>(see notes) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| E.I.R.P. $\geq$ 200 milliwatt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -64 dBm              |
| E.I.R.P. $<$ 200 milliwatt and<br>power spectral density $<$ 10 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -62 dBm              |
| E.I.R.P. $<$ 200 milliwatt that do not meet power spectral<br>density requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -64 dBm              |
| <p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note 3:</b> E.I.R.P. is based on the highest antenna gain. For MIMO devices refer to KDB publication 662911 D01.</p> |                      |

**Table 4: DFS Response requirement values**

| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Value                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <i>Non-occupancy period</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 30 minutes                                                                                                  |
| <i>Channel Availability Check Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 60 seconds                                                                                                  |
| <i>Channel Move Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10 seconds (See Note 1)                                                                                     |
| <i>Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 200 milliseconds +<br>approx. 60 milliseconds<br>over remaining 10 second<br>period.<br>(See Notes 1 and 2) |
| <i>U-NII Detection Bandwidth</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Minimum 100% of the U-<br>NII 99% transmission<br>power bandwidth.<br>(See Note 3)                          |
| <p><b>Note 1:</b> <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 2:</b> The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10-second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p><b>Note 3:</b> During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> |                                                                                                             |

**Table 5 – Short Pulse Radar Test Waveforms**

| Radar Type                                                                                                                                                        | Pulse Width (usec) | PRI (usec)                                                                                                                                                    | Pulses                                                                      | Minimum Percentage of Successful Detection | Minimum Trials |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------------------|----------------|
| 0                                                                                                                                                                 | 1                  | 1428                                                                                                                                                          | 18                                                                          | See Note 1                                 | See Note 1     |
| 1                                                                                                                                                                 | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in table 5a                                                                     | Roundup:<br>$\{(1/360) \times (19 \times 10^6 \text{ PRI}_{\text{usec}})\}$ | 60%                                        | 30             |
|                                                                                                                                                                   |                    | Test B: 15 unique PRI values randomly selected within the range of 518-3066 usec. With a minimum increment of 1 usec, excluding PRI values selected in Test A |                                                                             |                                            |                |
| 2                                                                                                                                                                 | 1-5                | 150-230                                                                                                                                                       | 23-29                                                                       | 60%                                        | 30             |
| 3                                                                                                                                                                 | 6-10               | 200-500                                                                                                                                                       | 16-18                                                                       | 60%                                        | 30             |
| 4                                                                                                                                                                 | 11-20              | 200-500                                                                                                                                                       | 12-16                                                                       | 60%                                        | 30             |
| Aggregate (Radar Types 1-4)                                                                                                                                       |                    |                                                                                                                                                               |                                                                             | 80%                                        | 120            |
| <b>Note 1:</b> Short Pulse Radar Type 0 should be used for the <i>Detection Bandwidth</i> test, <i>Channel Move Time</i> , and <i>Channel Closing Time</i> tests. |                    |                                                                                                                                                               |                                                                             |                                            |                |

**Table 6 – Long Pulse Radar Test Signal**

| Radar Waveform Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Trials |
|---------------------|--------------------|-------------------|------------|------------------|------------------|--------------------------------------------|----------------|
| 5                   | 50-100             | 5-20              | 1000-2000  | 1-3              | 8-20             | 80%                                        | 30             |

**Table 7 – Frequency Hopping Radar Test Signal**

| Radar Waveform Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Trials |
|---------------------|--------------------|------------|----------------|--------------------|--------------------------------|--------------------------------------------|----------------|
| 6                   | 1                  | 333        | 9              | 0.333              | 300                            | 70%                                        | 30             |



## **SYSTEM OVERVIEW**

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of KDB 905462 D02. The frequency of the signal generator is incremented in 1 MHz steps from  $F_L$  to  $F_H$  for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

## **SYSTEM CALIBRATION**

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

### **ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL**

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

### **TEST AND MEASUREMENT EQUIPMENT**

The following test and measurement equipment was utilized for the tests documented in this report:

| <b>TEST EQUIPMENT LIST</b>               |                     |              |               |                |
|------------------------------------------|---------------------|--------------|---------------|----------------|
| <b>Description</b>                       | <b>Manufacturer</b> | <b>Model</b> | <b>ID No.</b> | <b>Cal Due</b> |
| Spectrum Analyzer, PXA, 3Hz to 44GHz     | Keysight            | N9030A       | T459          | 01/24/20       |
| Signal Generator, MXG X-Series RF Vector | Agilent             | N5182B       | T1633         | 02/08/20       |

### **6.1.3. TEST AND MEASUREMENT SOFTWARE**

The following test and measurement software was utilized for the tests documented in this report:

| <b>TEST SOFTWARE LIST</b> |                |                                            |
|---------------------------|----------------|--------------------------------------------|
| <b>Name</b>               | <b>Version</b> | <b>Test / Function</b>                     |
| Aggregate Time-PXA        | 3.1            | Channel Loading and Aggregate Closing Time |
| PXA Read                  | 3.1            | Signal Generator Screen Capture            |
| SGXProject.exe            | 1.7            | Radar Waveform Generation and Download     |

### **6.1.4. TEST ROOM ENVIRONMENT**


The test room temperature and humidity shall be maintained within normal temperature of 15~35 °C and normal humidity 20~75% (relative humidity).

### **ENVIRONMENT CONDITION**

| <b>Parameter</b> | <b>Value</b> |
|------------------|--------------|
| Temperature      | 24.3 °C      |
| Humidity         | 42.5 %       |

### 6.1.5. SETUP OF EUT (CLIENT MODE)

#### RADIATED METHOD EUT TEST SETUP

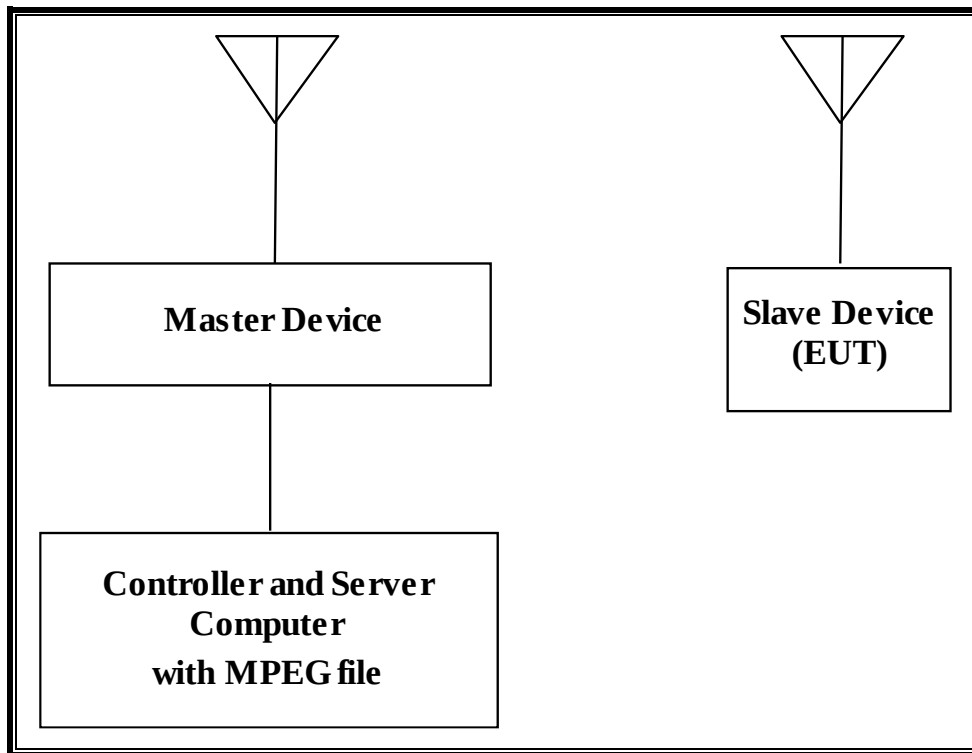


#### SUPPORT EQUIPMENT

The following support equipment was utilized for the tests documented in this report:

| PERIPHERAL SUPPORT EQUIPMENT LIST                |              |       |                   |          |
|--------------------------------------------------|--------------|-------|-------------------|----------|
| Description                                      | Manufacturer | Model | Serial Number     | FCC ID   |
| 802.11a/b/g/n/ac Wireless Router (Master Device) | Apple        | A1521 | C86L3BA8FJ1R      | BCGA1521 |
| Notebook PC (Controller/Server)                  | Apple        | A1466 | C02P52H6G085      | DoC      |
| AC Adapter (Notebook PC)                         | Apple        | A1435 | C0455332SNAG6HKAW | DoC      |

### 6.1.6. SETUP OF EUT (CLIENT TO CLIENT MODE)

#### RADIATED METHOD EUT TEST SETUP WHEN MONITORING THE EUT

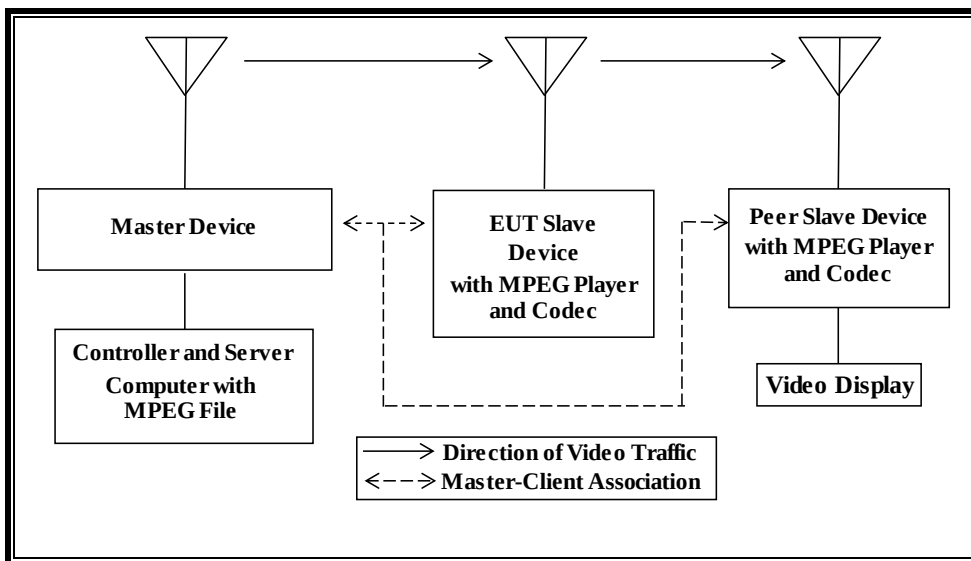

#### SUPPORT EQUIPMENT


The following support equipment was utilized for the tests documented in this report:

| PERIPHERAL SUPPORT EQUIPMENT LIST                |              |            |                   |          |
|--------------------------------------------------|--------------|------------|-------------------|----------|
| Description                                      | Manufacturer | Model      | Serial Number     | FCC ID   |
| 802.11a/b/g/n/ac Wireless Router (Master Device) | Apple        | A1521      | C86L3BA8FJ1R      | BCGA1521 |
| Notebook PC (Controller/Server)                  | Apple        | A1466      | C02P52H6G085      | DoC      |
| AC Adapter (Notebook PC)                         | Apple        | A1435      | C0455332SNAG6HKAW | DoC      |
| Apple TV (Peer Slave Device)                     | Apple        | A1842      | C0HW3DN4J1WF      | BCGA1842 |
| 15" LCD TV (Video Display)                       | Polaroid     | TLX-01511C | 02006             | DoC      |




### 6.1.7. SETUP OF EUT (PEER TO PEER MODE)

#### RADIATED METHOD EUT TEST SETUP WHEN MONITORING THE EUT

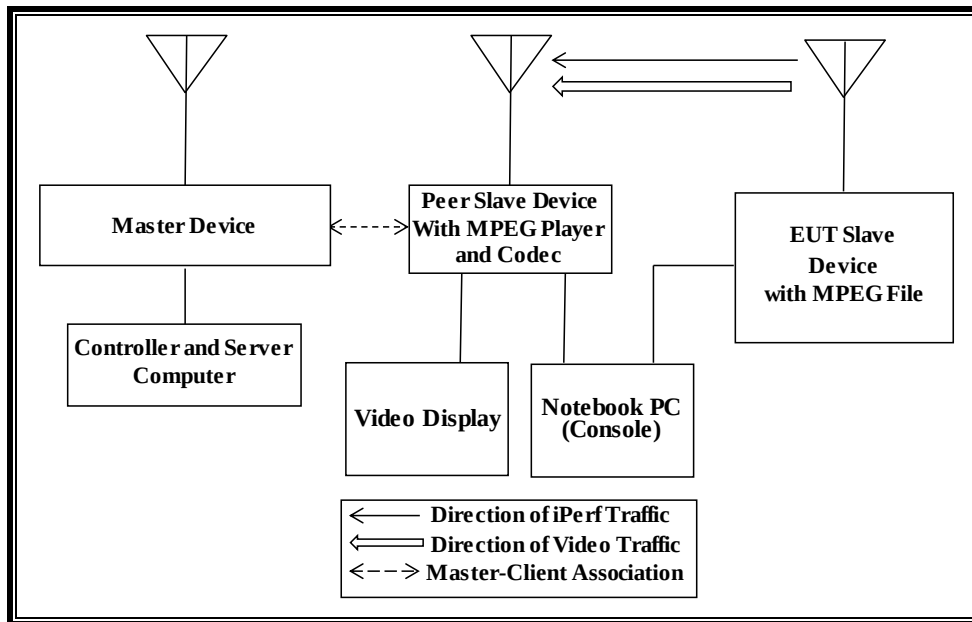

## RADIATED METHOD EUT TEST SETUP WHEN MONITORING THE PEER SLAVE DEVICE

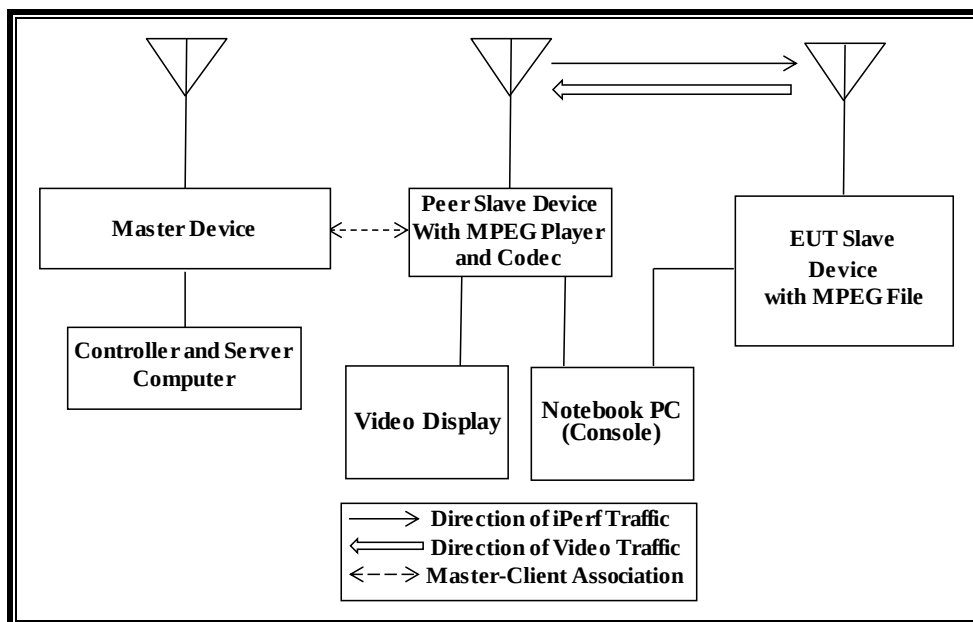

## SUPPORT EQUIPMENT

The following support equipment was utilized for the tests documented in this report:

| PERIPHERAL SUPPORT EQUIPMENT LIST                |              |            |                   |          |
|--------------------------------------------------|--------------|------------|-------------------|----------|
| Description                                      | Manufacturer | Model      | Serial Number     | FCC ID   |
| 802.11a/b/g/n/ac Wireless Router (Master Device) | Apple        | A1521      | C86L3BA8FJ1R      | BCGA1521 |
| Notebook PC (Controller/Server)                  | Apple        | A1466      | C02P52H6G085      | DoC      |
| AC Adapter (Notebook PC)                         | Apple        | A1435      | C0455332SNAG6HKAW | DoC      |
| Apple TV (Peer Slave Device)                     | Apple        | A1842      | C0HW3DN4J1WF      | BCGA1842 |
| Notebook PC (Peer Console)                       | Apple        | A1466      | C02P41RZG086      | DoC      |
| AC Adapter (Console PC)                          | Apple        | A1424      | C06503504AXG6P4A3 | DoC      |
| 15" LCD TV (Video Display)                       | Polaroid     | TLX-01511C | 02006             | DoC      |

### 6.1.8. DESCRIPTION OF EUT

For FCC the EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

For IC the EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges, excluding the 5600-5650 MHz range.

The EUT is a Slave Device without Radar Detection.

The highest power level within these bands is 19.1 dBm EIRP in the 5250-5350 MHz band and 18.80 dBm EIRP in the 5470-5725 MHz band.

The only antenna assembly utilized with the EUT is constructed using two antennas with respective gains of -2.3 dBi and -7.1 dBi in the 5250-5350 MHz band and -3.1 dBi and -5.6 dBi in the 5470-5725 MHz band. For 5.3GHz band the uncorrelated directional gain is -4.07dBi and -4.17 for 5.6GHz band.

Two antennas are utilized to meet the diversity and MIMO operational requirements.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is  $-64 + 1 = -63$  dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.

The EUT uses two transmitter/receiver chains, each connected to an antenna to perform radiated tests.

In **Standard Client Mode** WLAN traffic that meets or exceeds the minimum required loading was generated by streaming the compressed version of the video test file "6 ½ Magic Hours" from the Master to the Slave using OPlayer Lite media player.

In **Client to Client mode** WLAN traffic is generated by streaming the compressed version of the video test file "6 ½ Magic Hours" from the Master to the Slave and then on to the peer slave device in full motion video mode using OPlayer Lite media player and embedded proprietary AirPlay software.

In **Peer to Peer mode while monitoring the EUT**, WLAN traffic is generated with the combination of streaming the compressed version of the video test file "6 ½ Magic Hours" from the EUT to the Peer Slave Device in full motion video mode using OPlayer HD media player and embedded proprietary AirPlay software and Iperf from the EUT to the Peer Slave Device.

In **Peer to Peer mode while monitoring the Peer Slave Device**, WLAN traffic is generated with the combination of streaming the compressed version of the video test file "6 ½ Magic Hours" from the EUT to the Peer Slave Device in full motion video mode using OPlayer HD media player and embedded proprietary AirPlay software and Iperf from the Peer Slave Device to the EUT.

While performing **Peer to Peer Mode** testing only the Peer Slave Device is associated to the Master Device.

Peer to Peer Mode has been reviewed and approved as compliant with the DFS requirements for client devices by the FCC via KDB enquiry. The enquiry confirmed that the test cases used adequately demonstrate compliance with DFS requirements for client devices.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11ax architecture. Three nominal channel bandwidths are implemented: 20 MHz, 40 MHz and 80 MHz.

The software installed in the EUT is 13.0 (17A500a).

The software installed in the access point is revision 7.7.9.

### **UNIFORM CHANNEL SPREADING**

This function is not required per KDB 905462.

### **OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS**

The Master Device is an Apple, Inc. Access Point, FCC ID: BCGA1521. The minimum antenna gain for the Master Device is 1.4 dBi.

The rated output power of the Master unit is  $> 23\text{dBm}$  (EIRP). Therefore the required interference threshold level is  $-64\text{ dBm}$ . After correction for procedural adjustments, the required radiated threshold at the antenna port is  $-64 + 1 = -63\text{ dBm}$ .

The calibrated radiated DFS Detection Threshold level is set to  $-64\text{ dBm}$ . The tested level is lower than the required level hence it provides a margin to the limit.

The software installed in the access point is revision 7.7.9.


## 6.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH

### 6.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

### 6.2.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

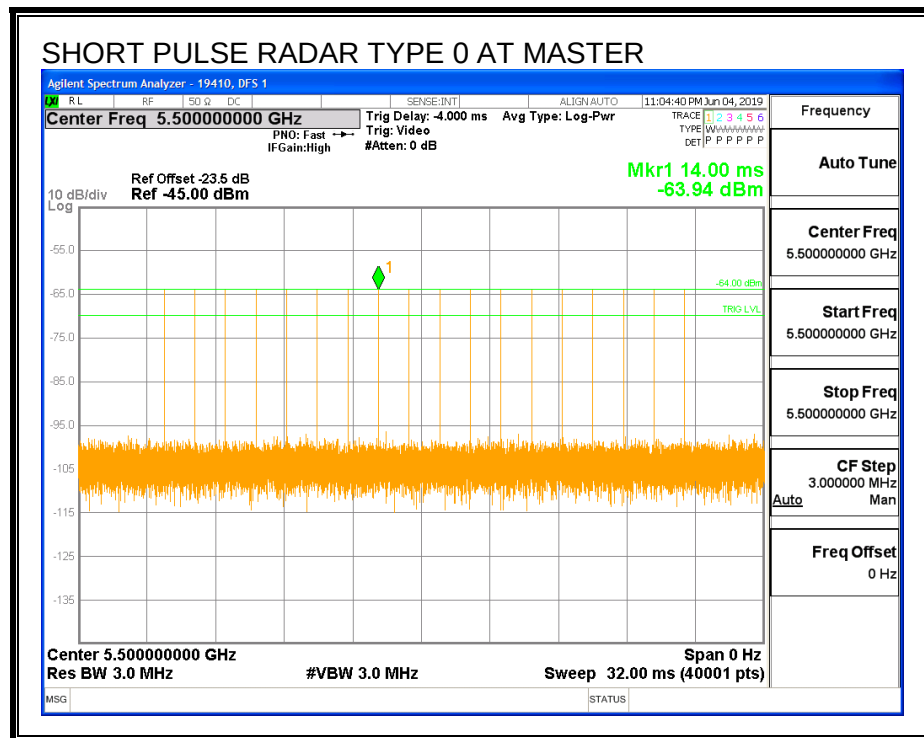

**TRAFFIC**

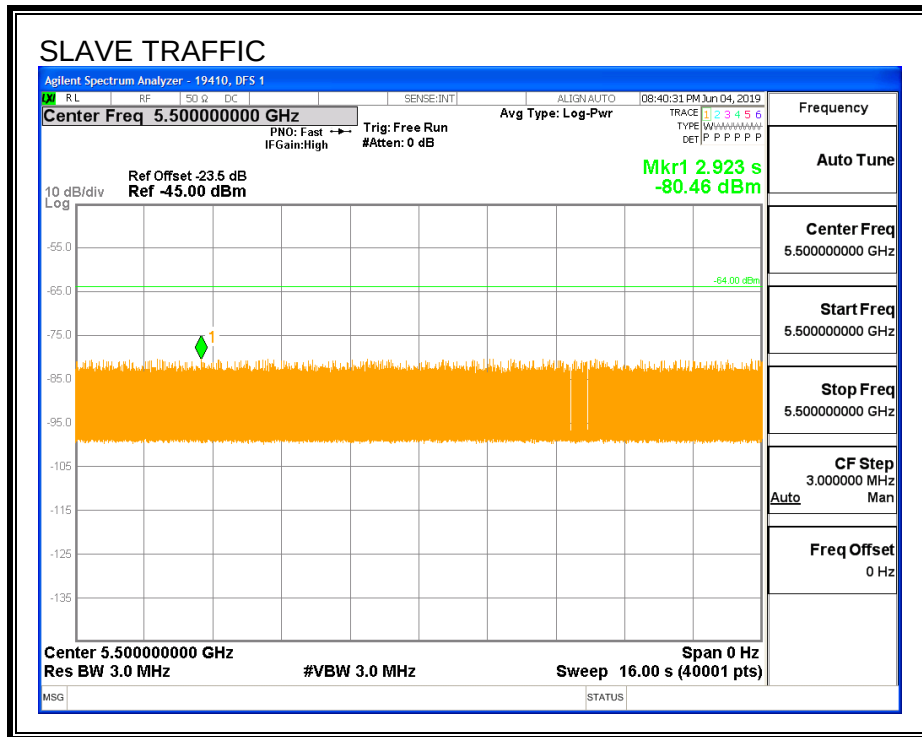

## CHANNEL LOADING

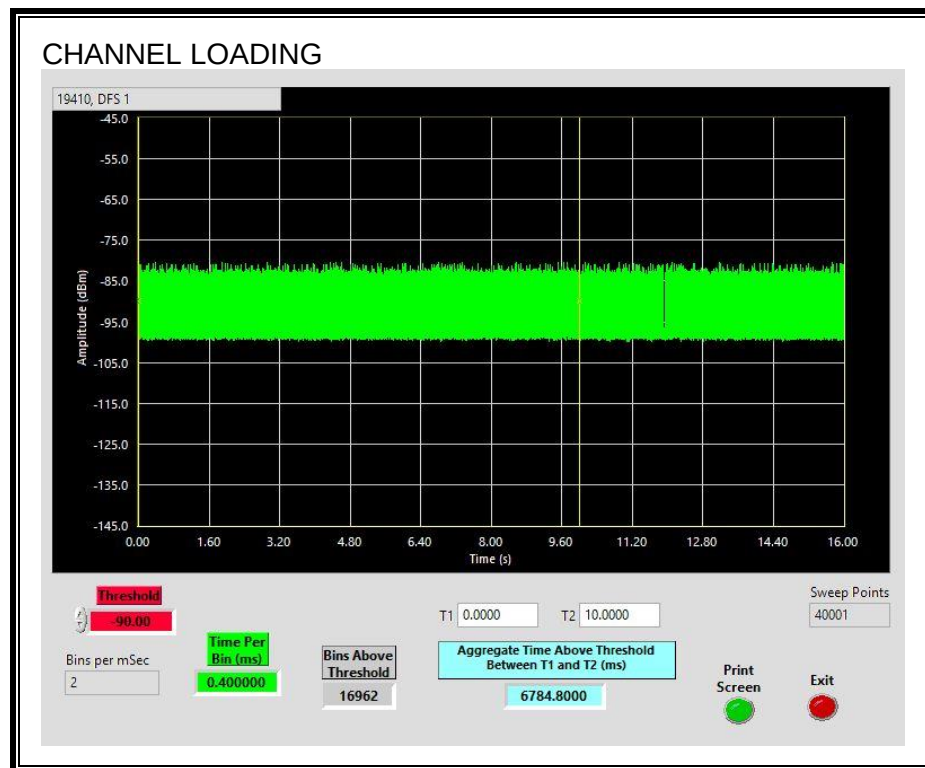

The level of traffic loading on the channel by the EUT is 67.84%



### 6.2.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.2.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS

| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 4.105                      | 10             |

| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 16.0                                                  | 60              |

**MOVE TIME**

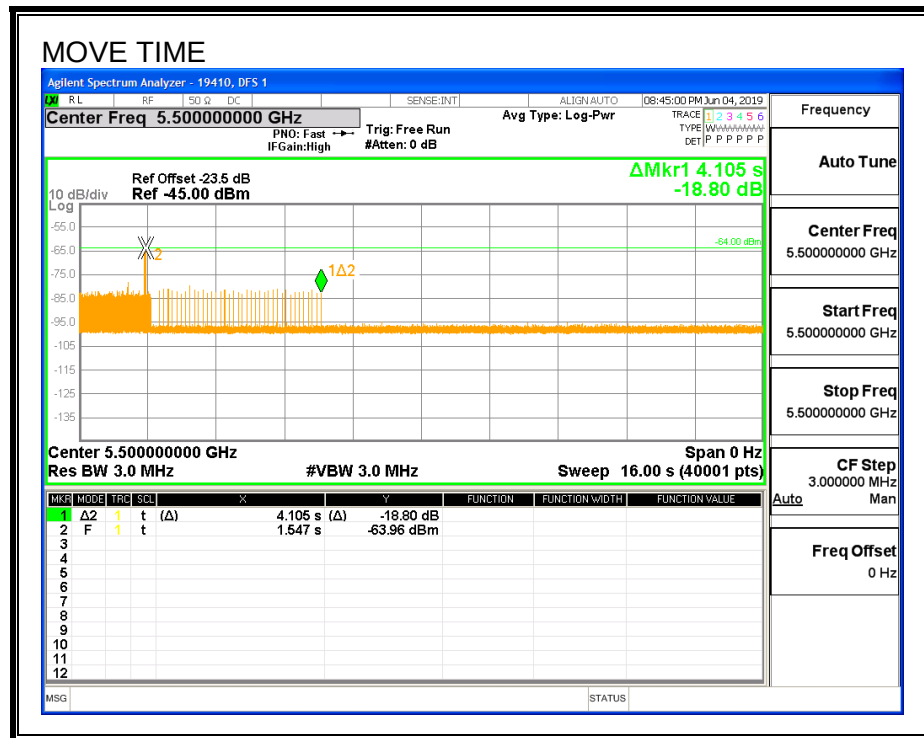



### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.




## 6.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH

### 6.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

### 6.3.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

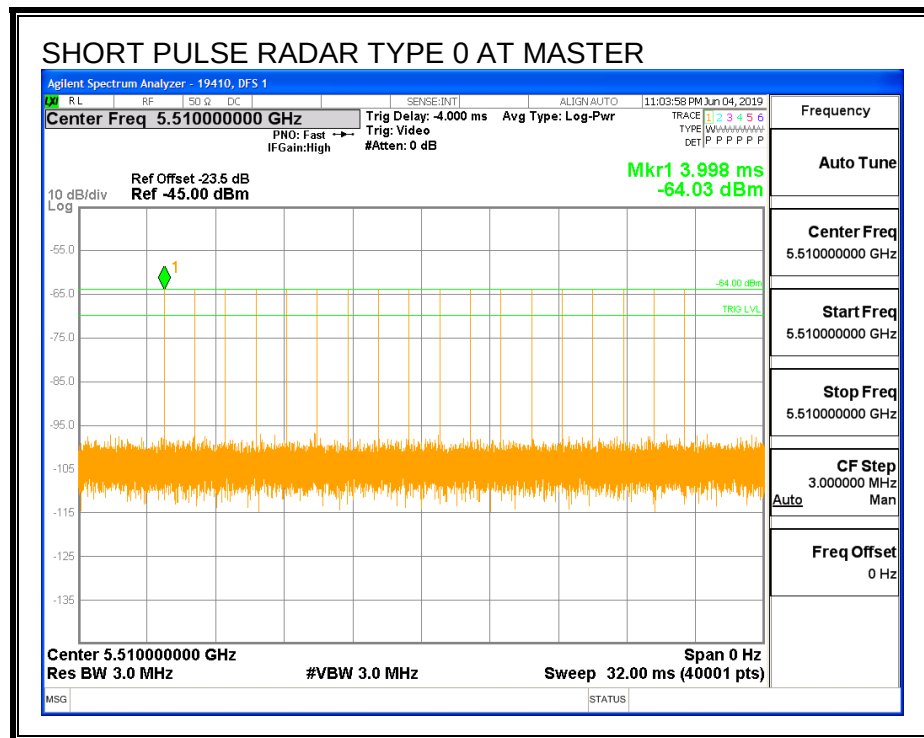

**TRAFFIC**

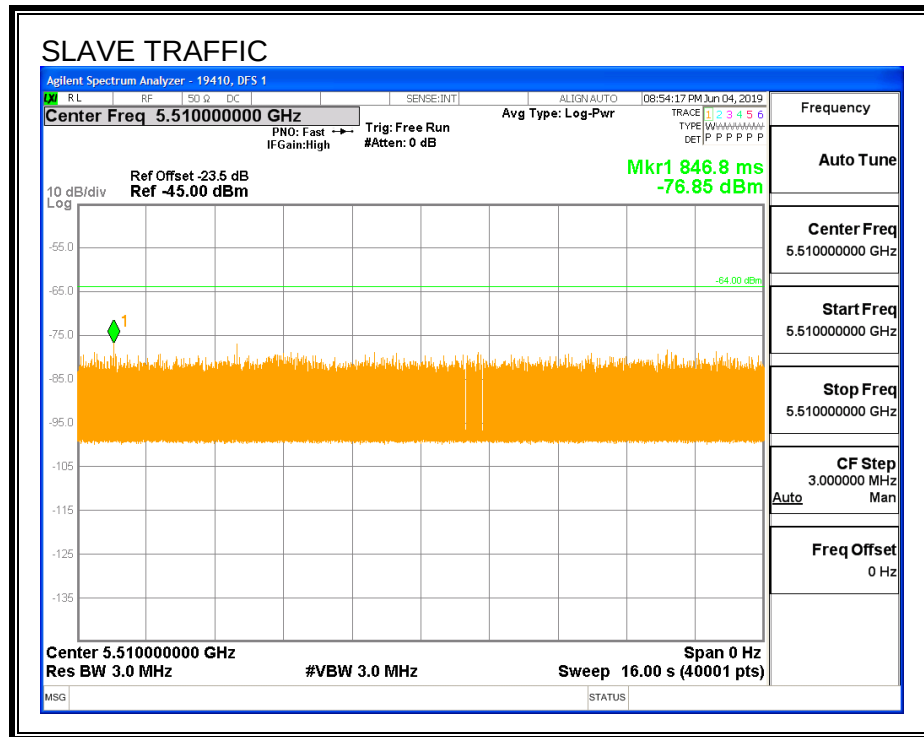

## CHANNEL LOADING

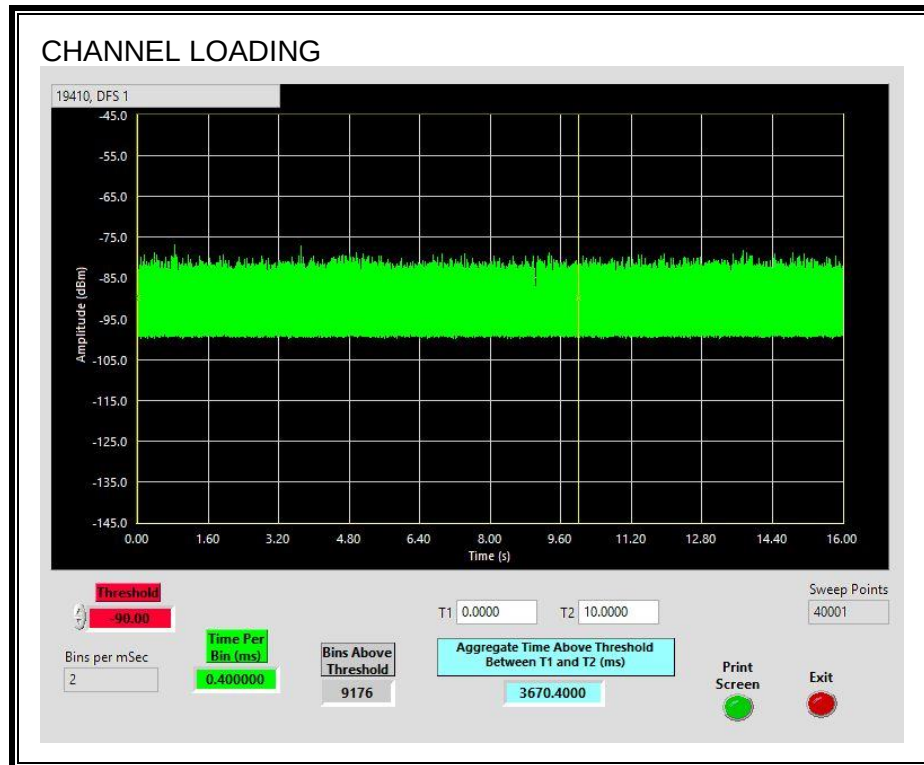

The level of traffic loading on the channel by the EUT is 36.70%

### 6.3.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.3.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).


#### RESULTS

| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 3.966                      | 10             |


| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 18.8                                                  | 60              |



## MOVE TIME

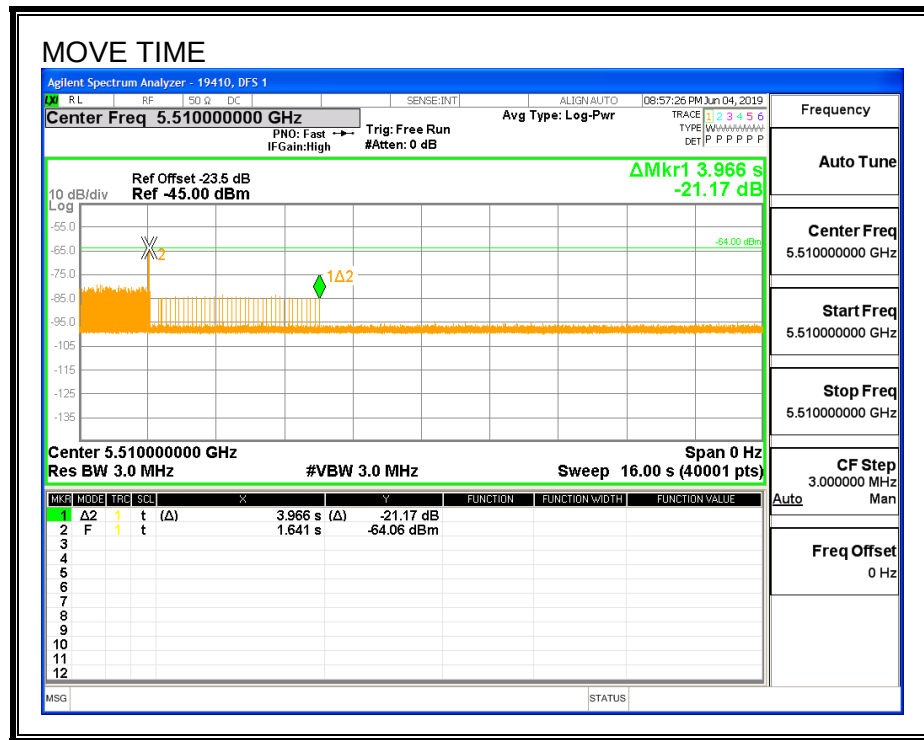

# **CHANNEL CLOSING TIME**

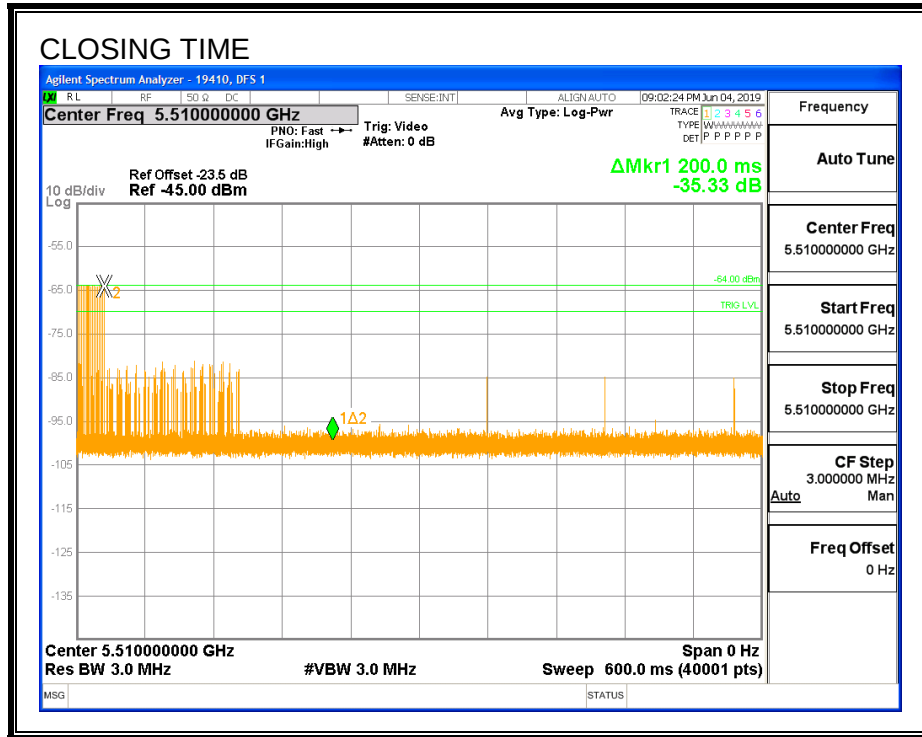

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.




## 6.4. CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH

### 6.4.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

### 6.4.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

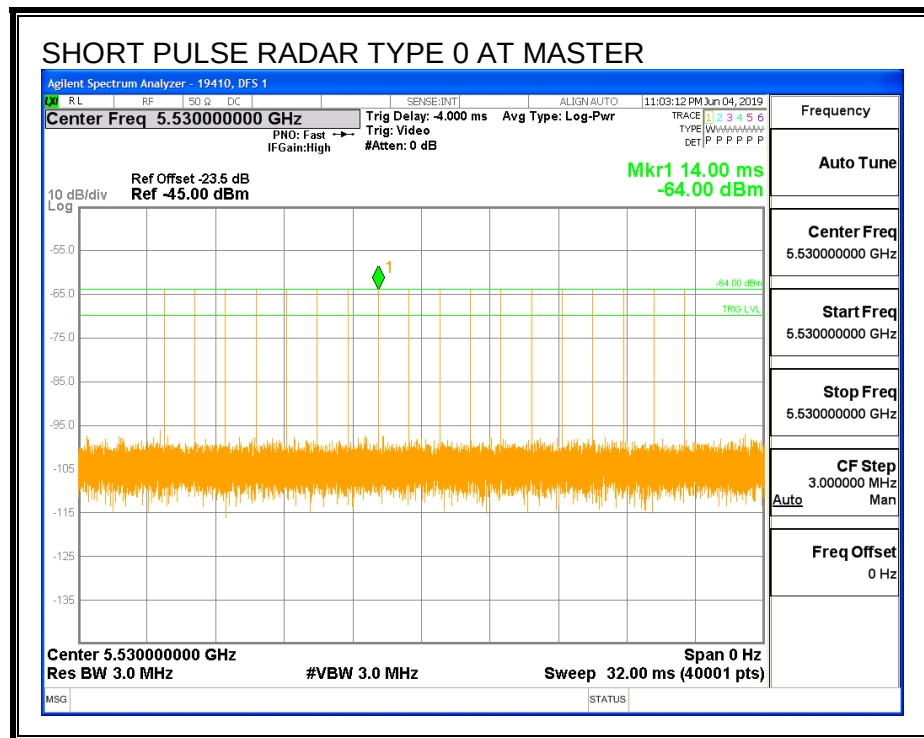

**TRAFFIC**

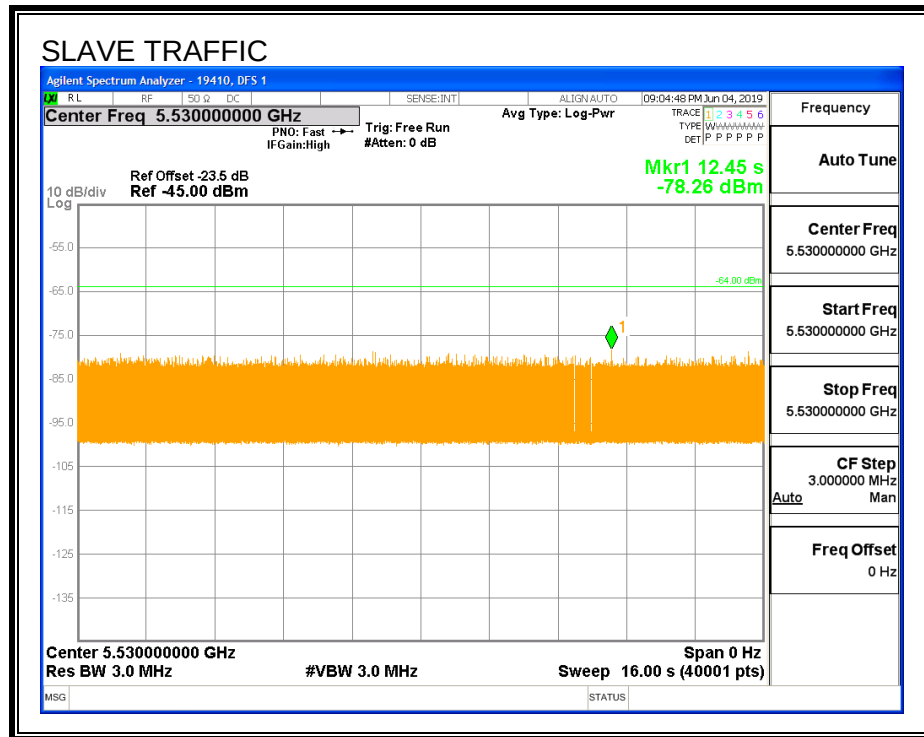

## CHANNEL LOADING

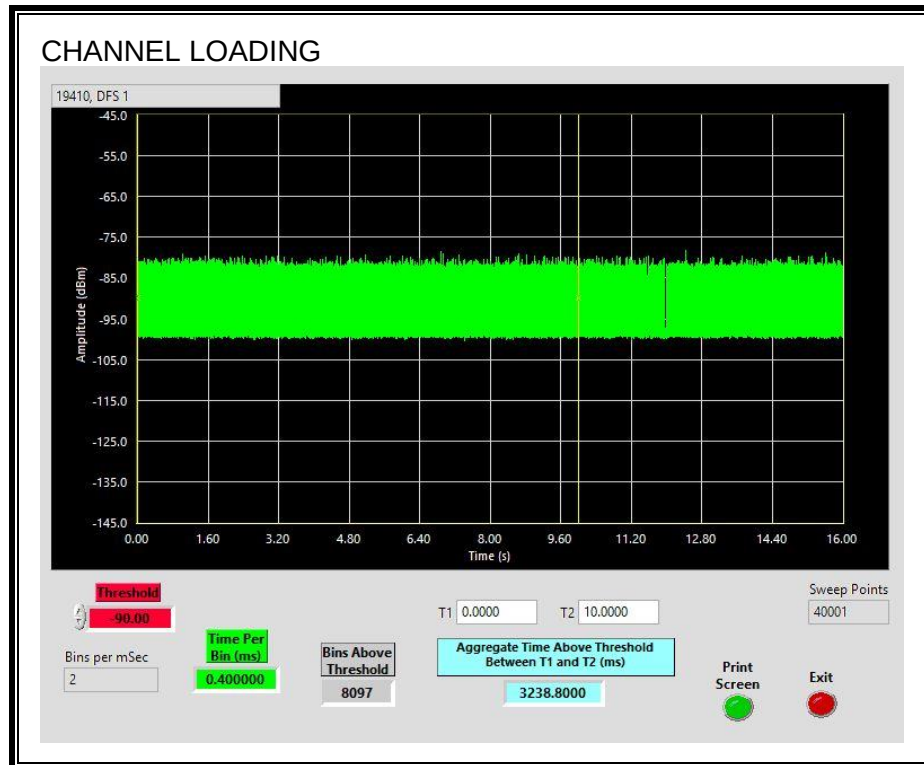

The level of traffic loading on the channel by the EUT is 32.38%

### 6.4.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.4.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS

| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 0.025                      | 10             |

| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 0.0                                                   | 60              |

**MOVE TIME**

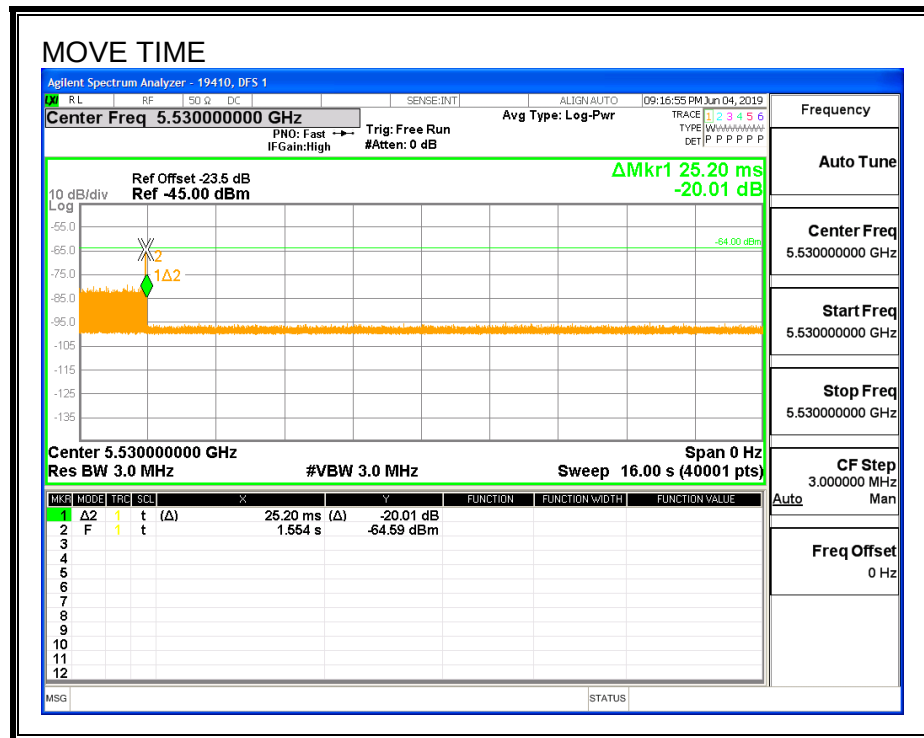





### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.



## 6.4.5. 30-MINUTE NON-OCCUPANCY PERIOD

### RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

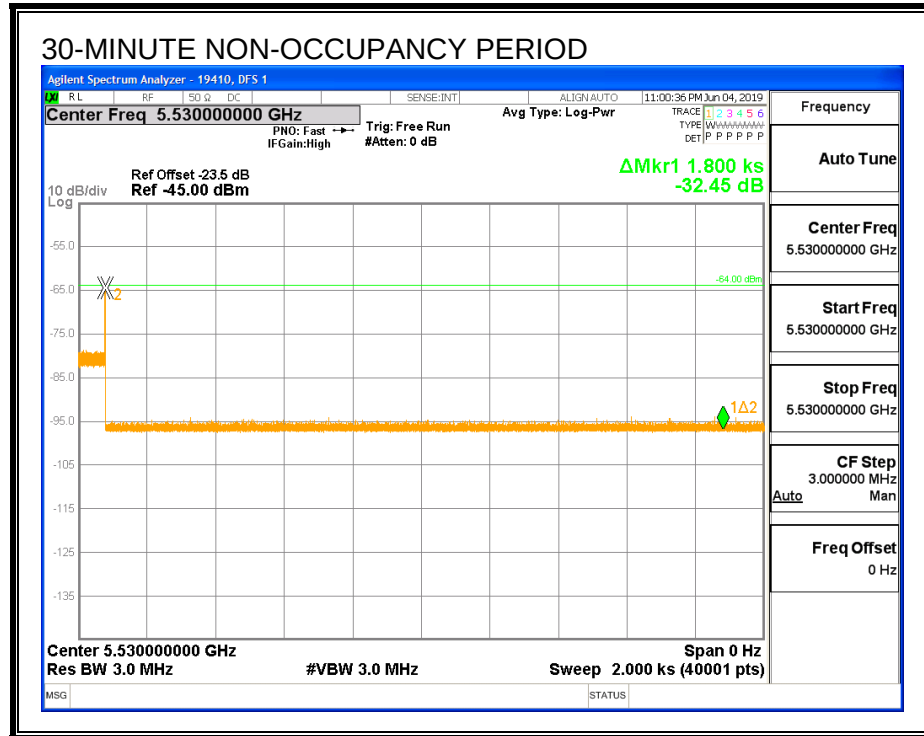


## 6.5. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH

### 6.5.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

### 6.5.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

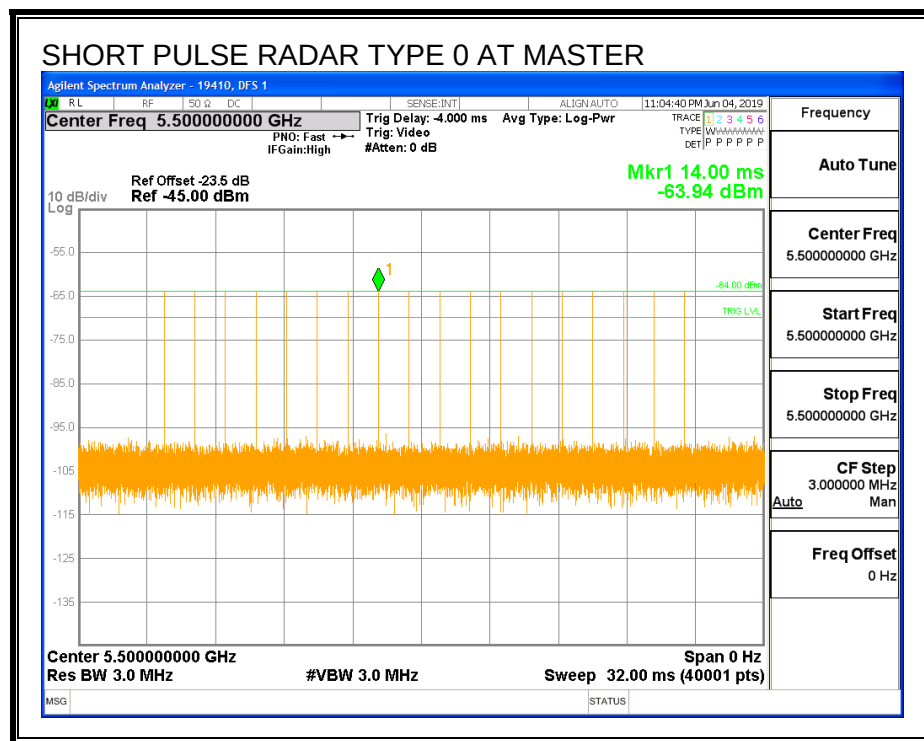

**TRAFFIC**

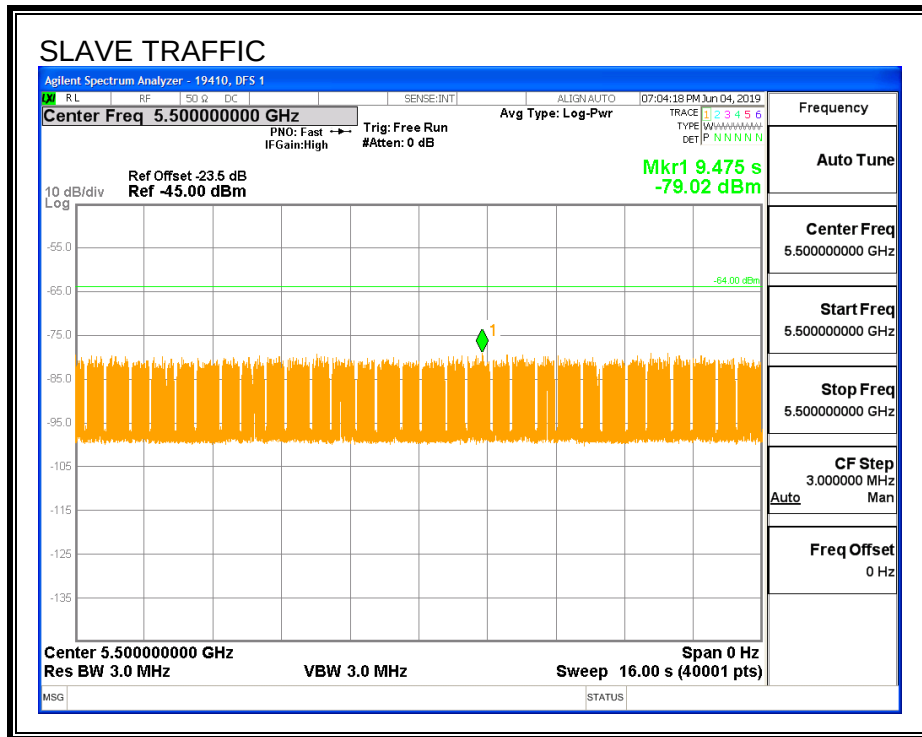

## CHANNEL LOADING

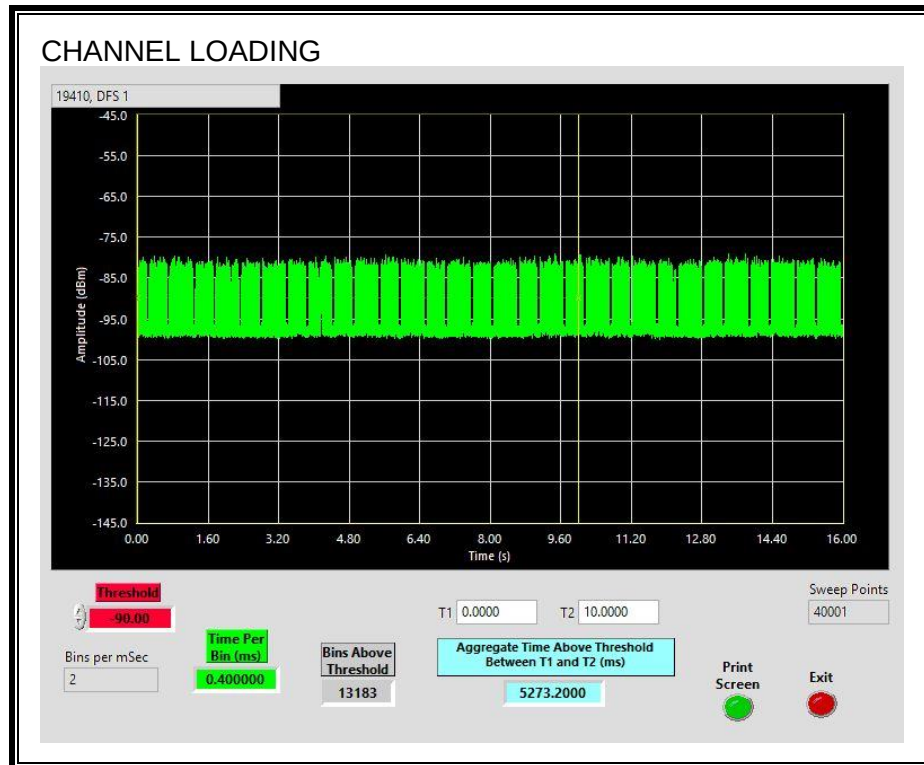

The level of traffic loading on the channel by the EUT is 52.73%

### 6.5.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.5.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS

| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 4.104                      | 10             |


| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 53.6                                                  | 60              |

## MOVE TIME

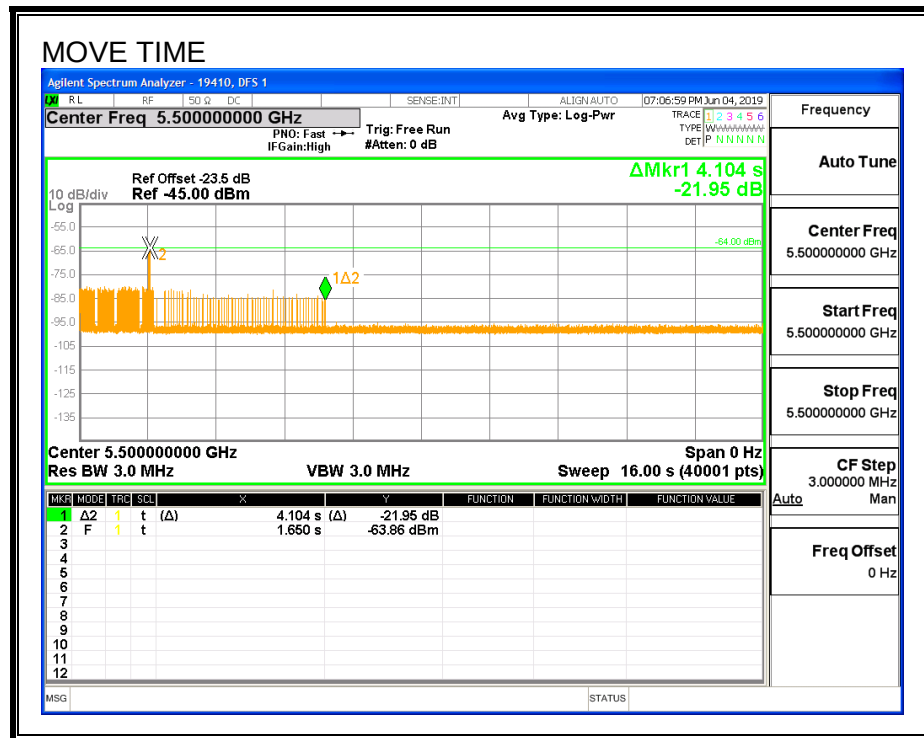



**CHANNEL CLOSING TIME**

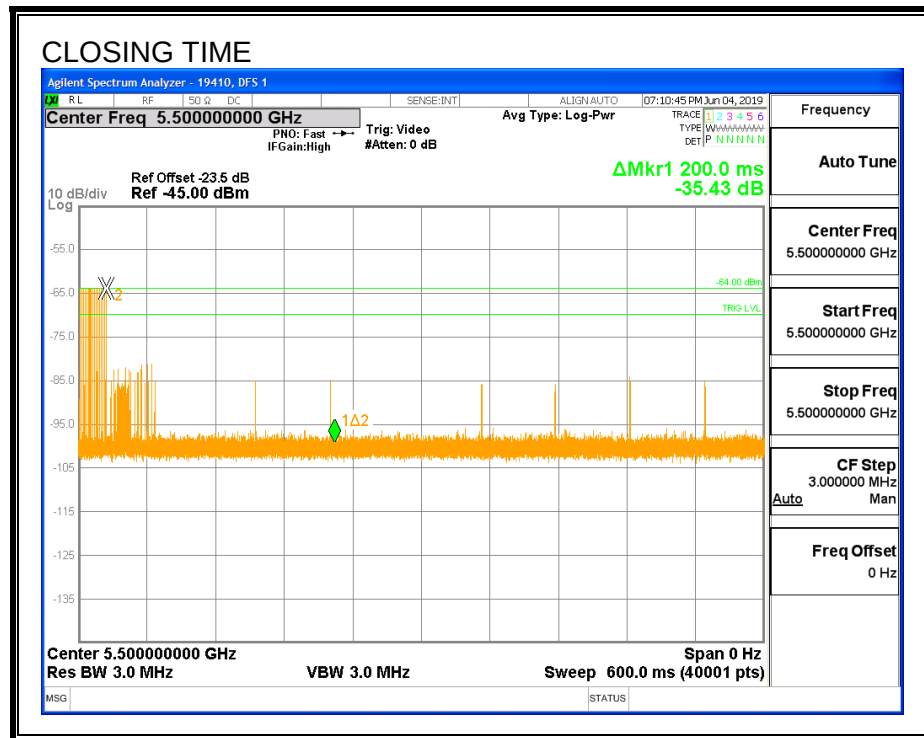

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.




## 6.6. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH

### 6.6.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

### 6.6.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

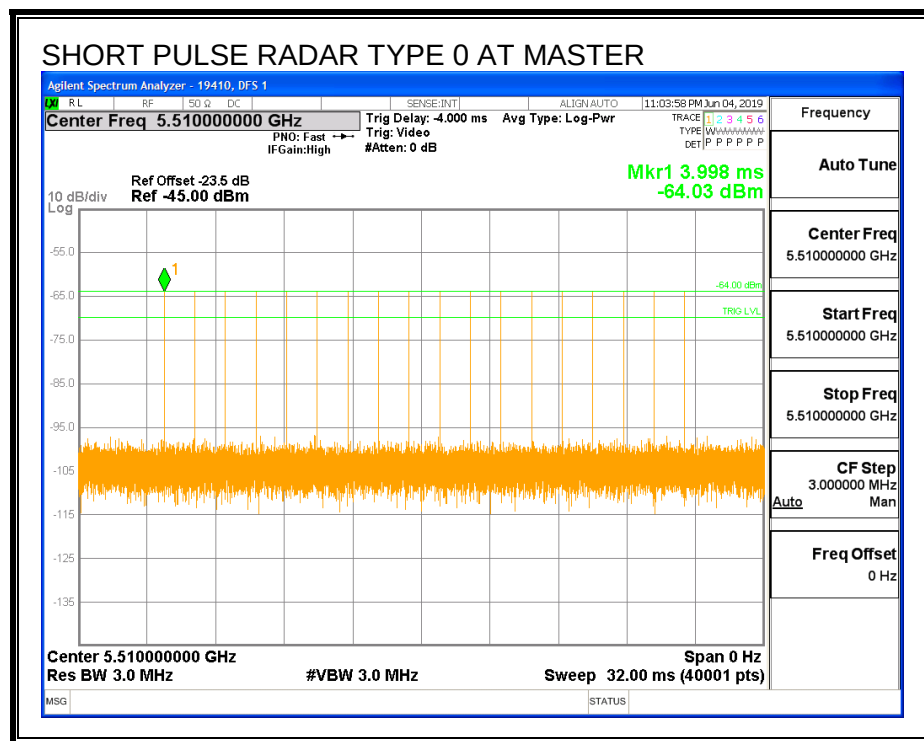

**TRAFFIC**

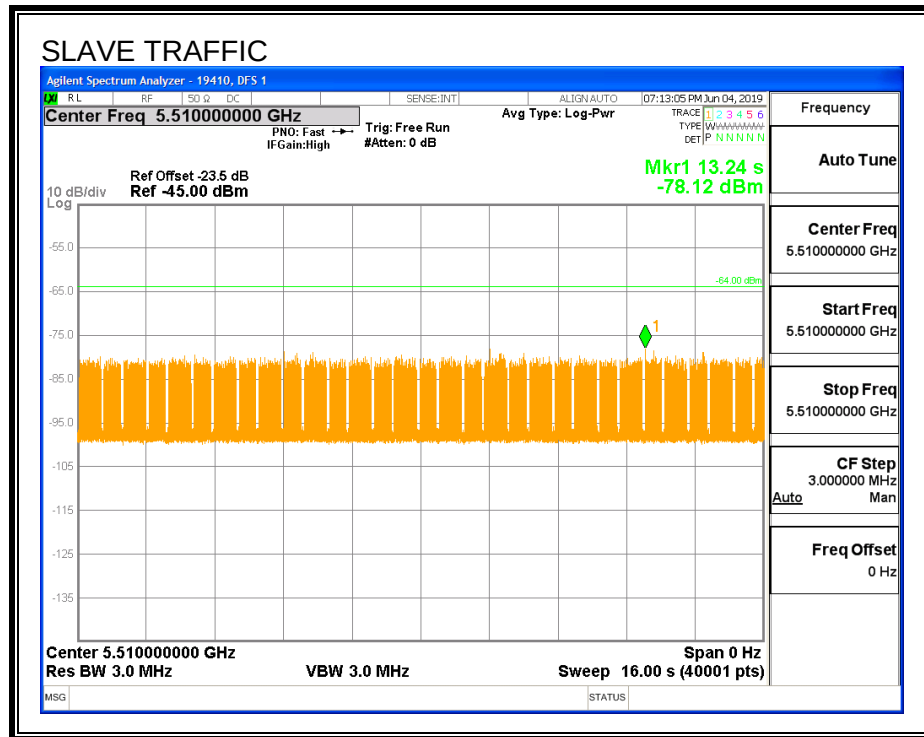

## CHANNEL LOADING

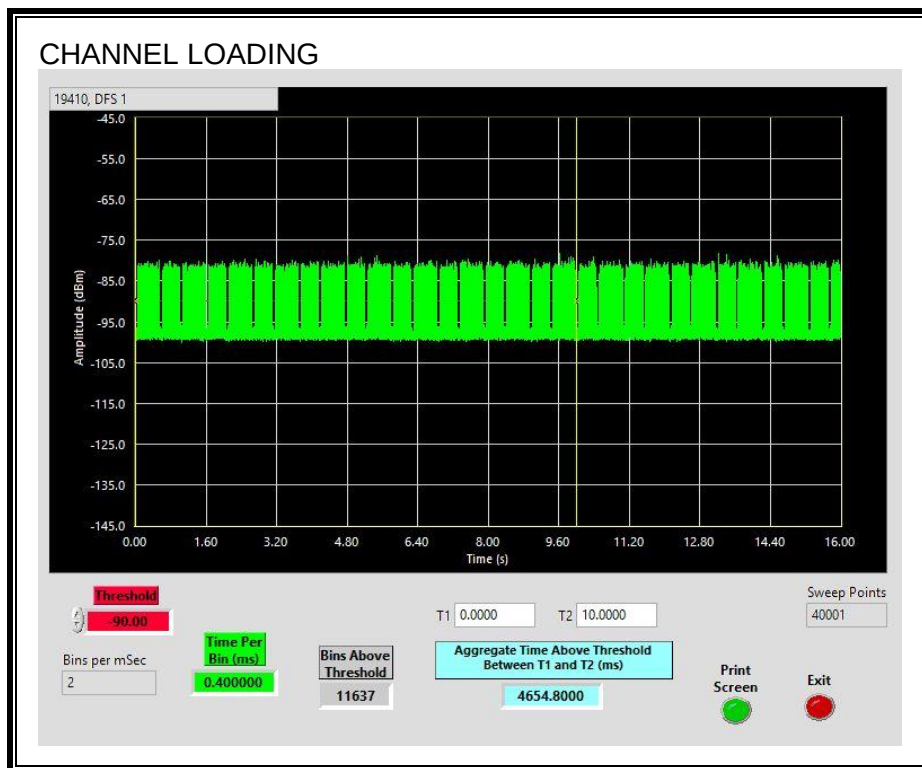

The level of traffic loading on the channel by the EUT is 46.54%

### 6.6.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.6.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 3.996                      | 10             |

| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 40.8                                                  | 60              |

## MOVE TIME

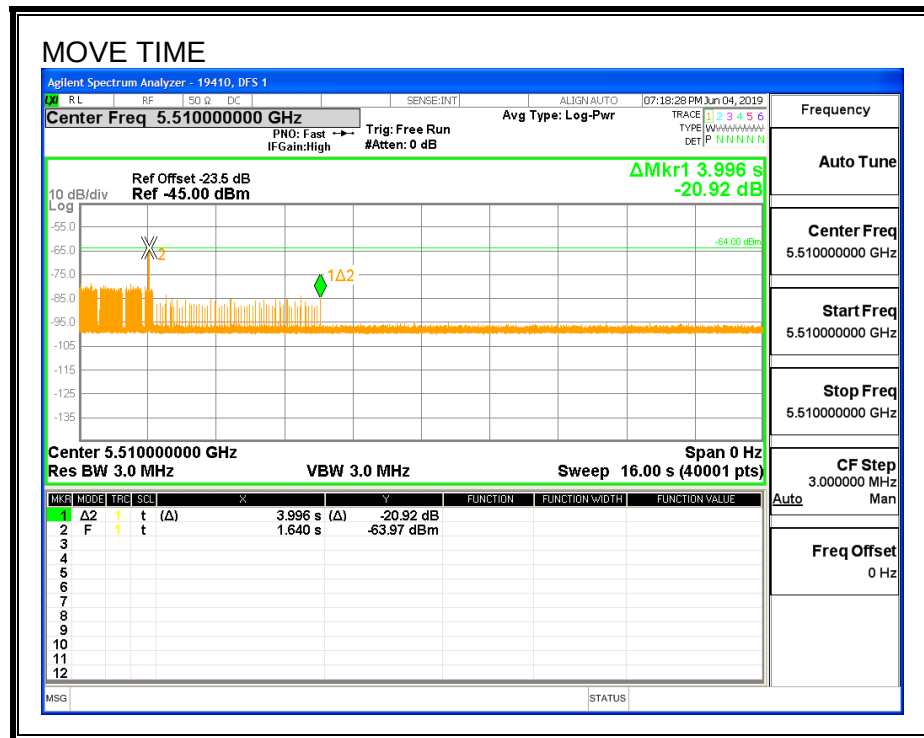

**CHANNEL CLOSING TIME**

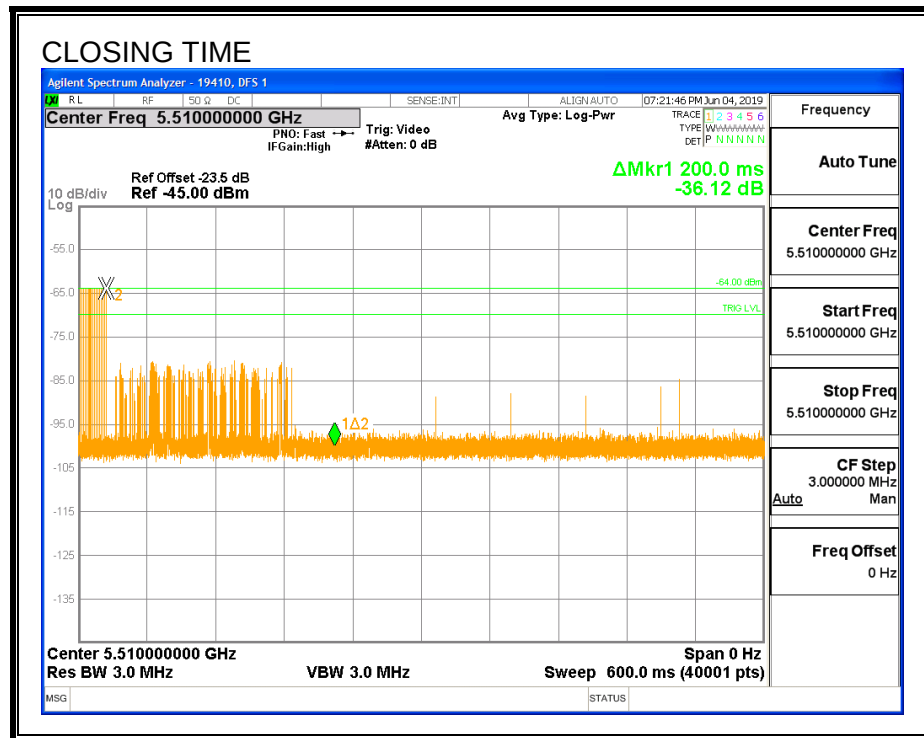



### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.




## 6.7. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH

### 6.7.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

### 6.7.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

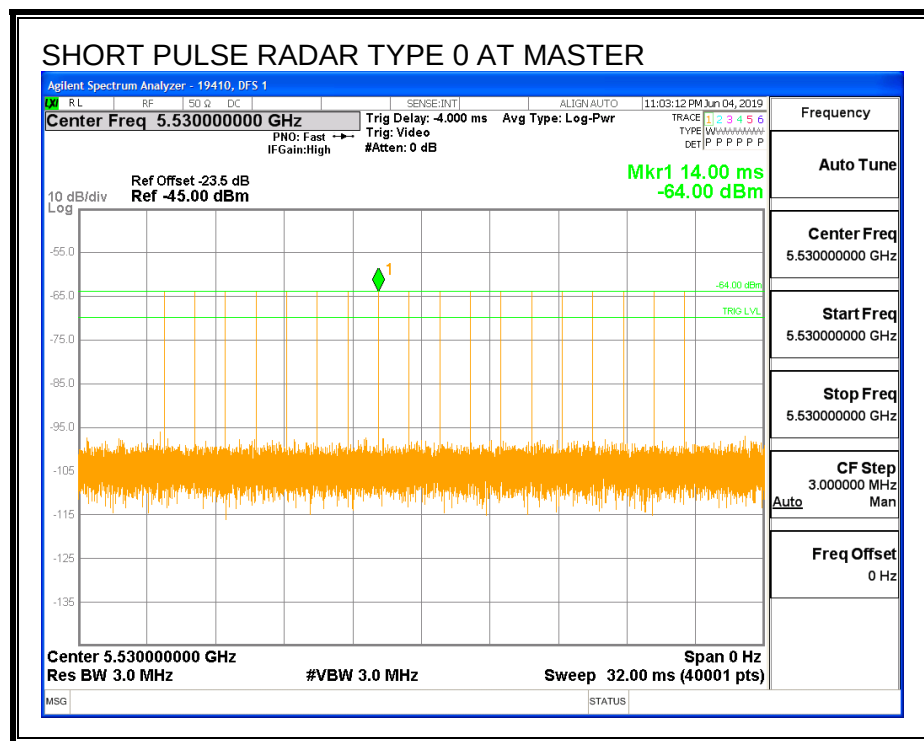

**TRAFFIC**

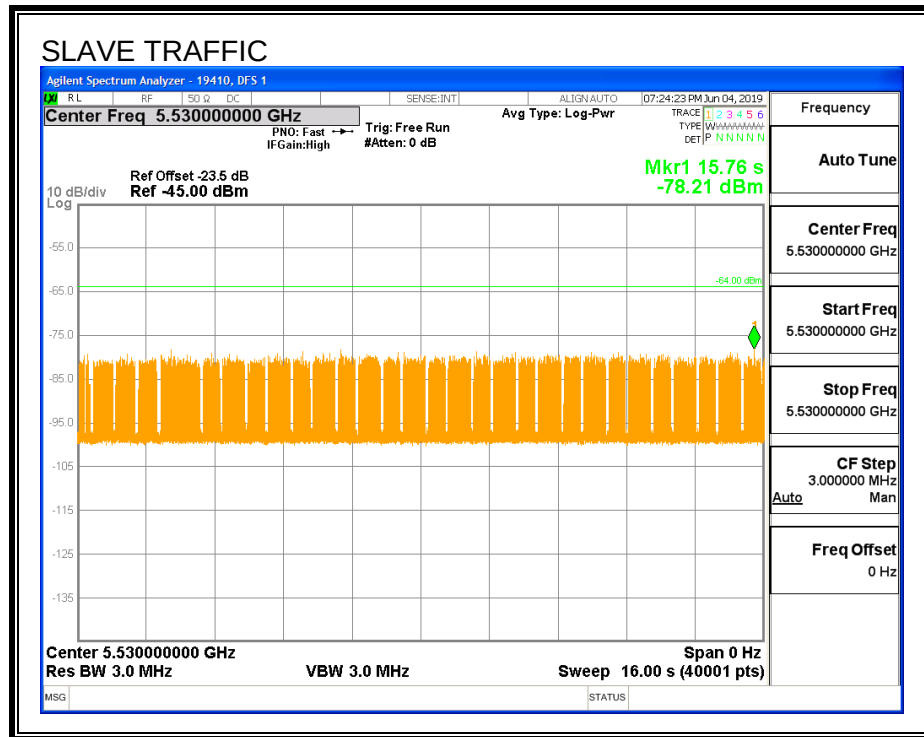

## CHANNEL LOADING

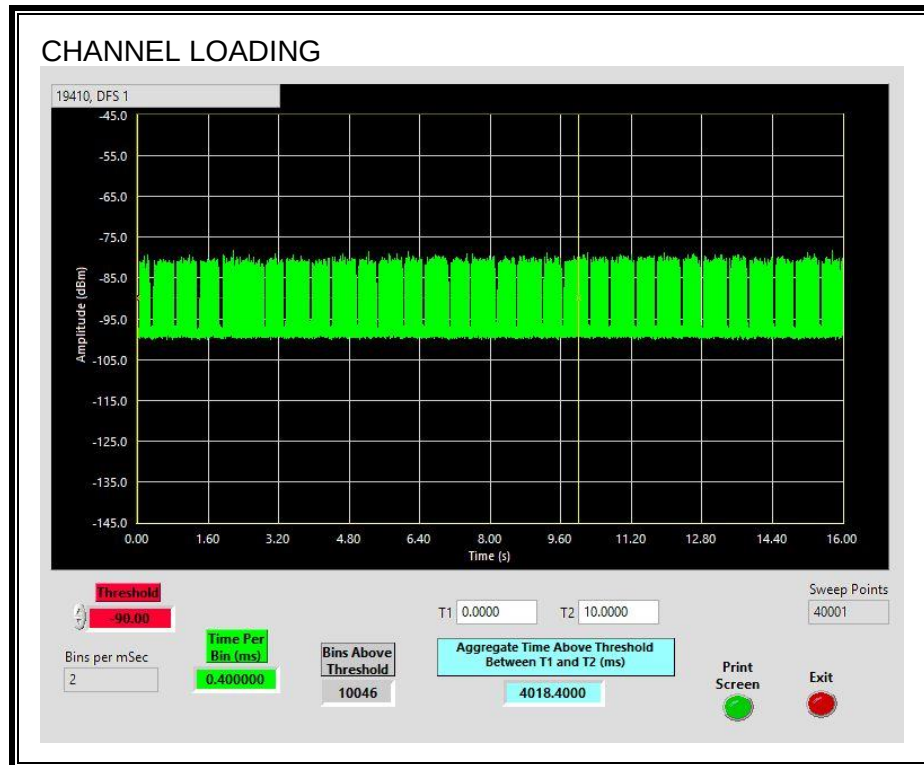

The level of traffic loading on the channel by the EUT is 40.18%

### 6.7.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.7.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 0.149                      | 10             |

| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 0.0                                                   | 60              |

**MOVE TIME**

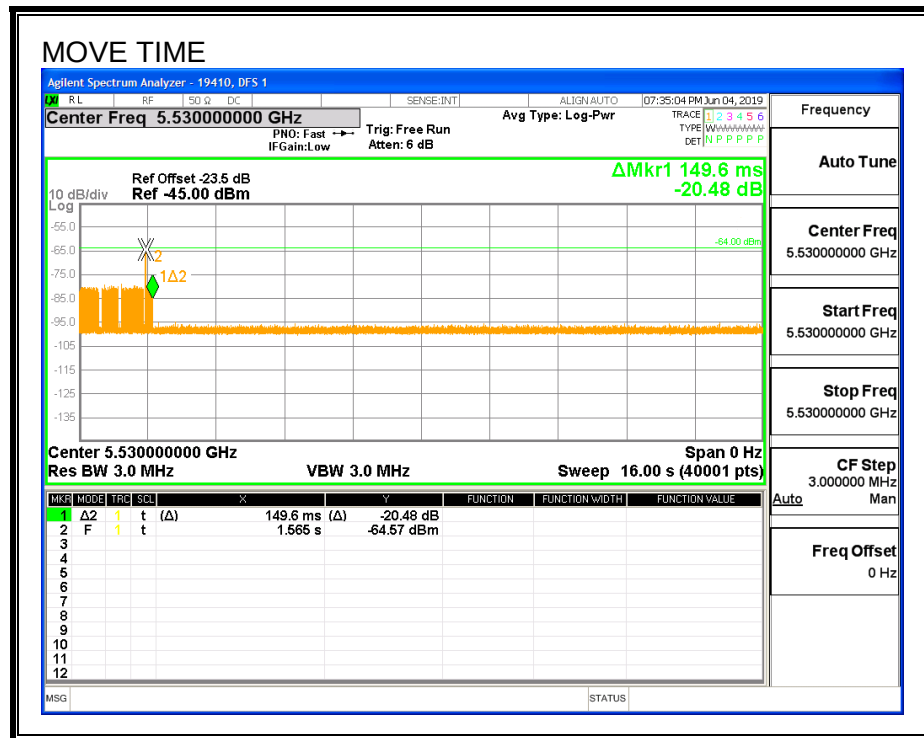

**CHANNEL CLOSING TIME**

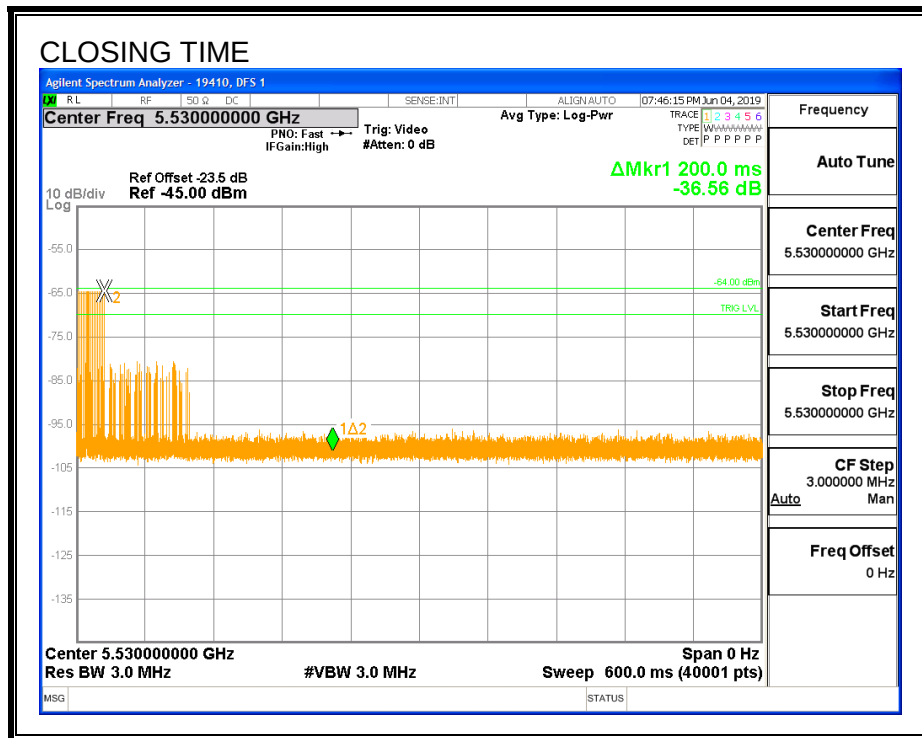

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.






### 6.7.5. 30-MINUTE NON-OCCUPANCY PERIOD

#### RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

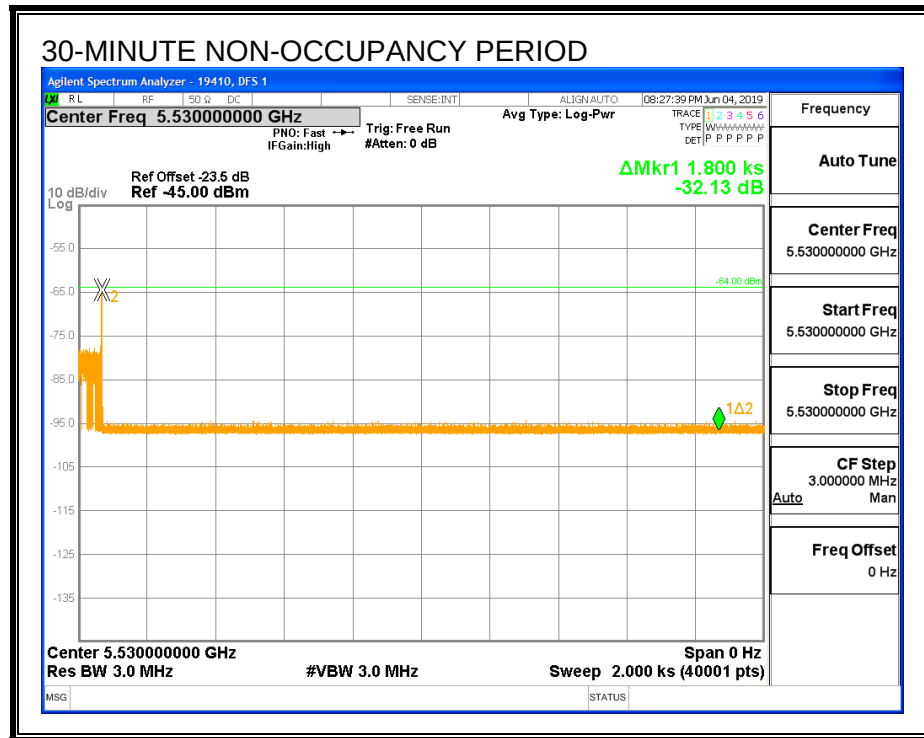


## 6.8. PEER TO PEER MODE EUT RESULTS FOR 20 MHz BANDWIDTH

### 6.8.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

### 6.8.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

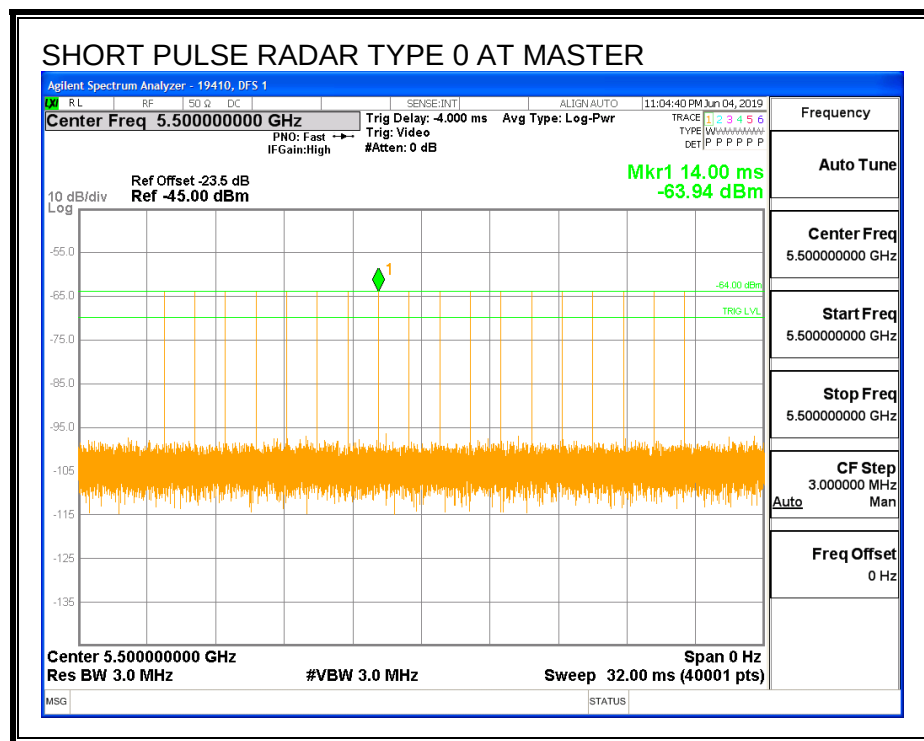

**TRAFFIC**

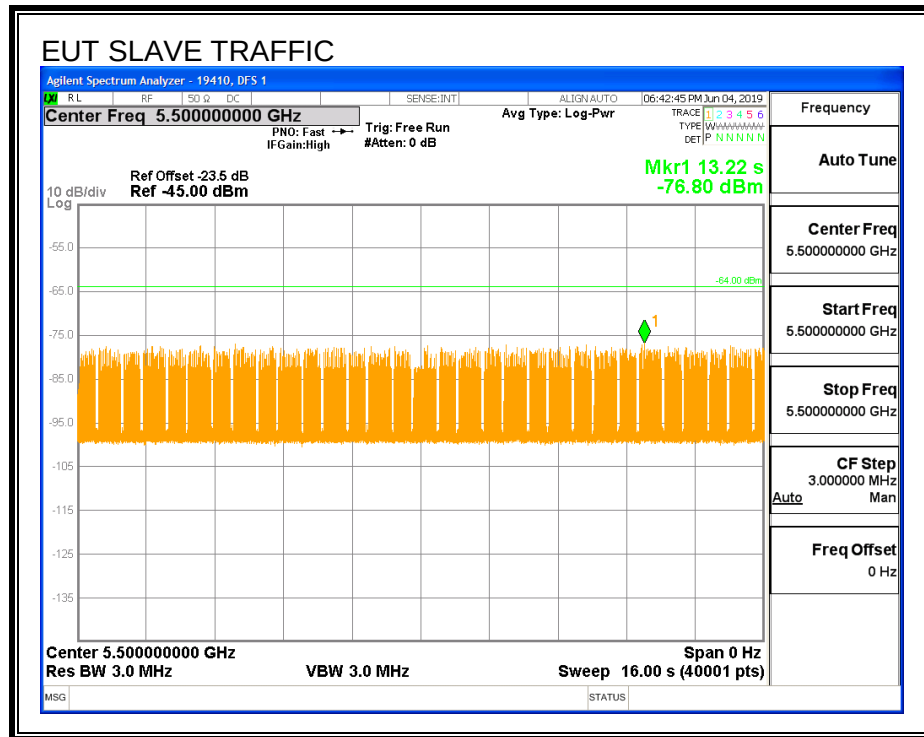

## CHANNEL LOADING

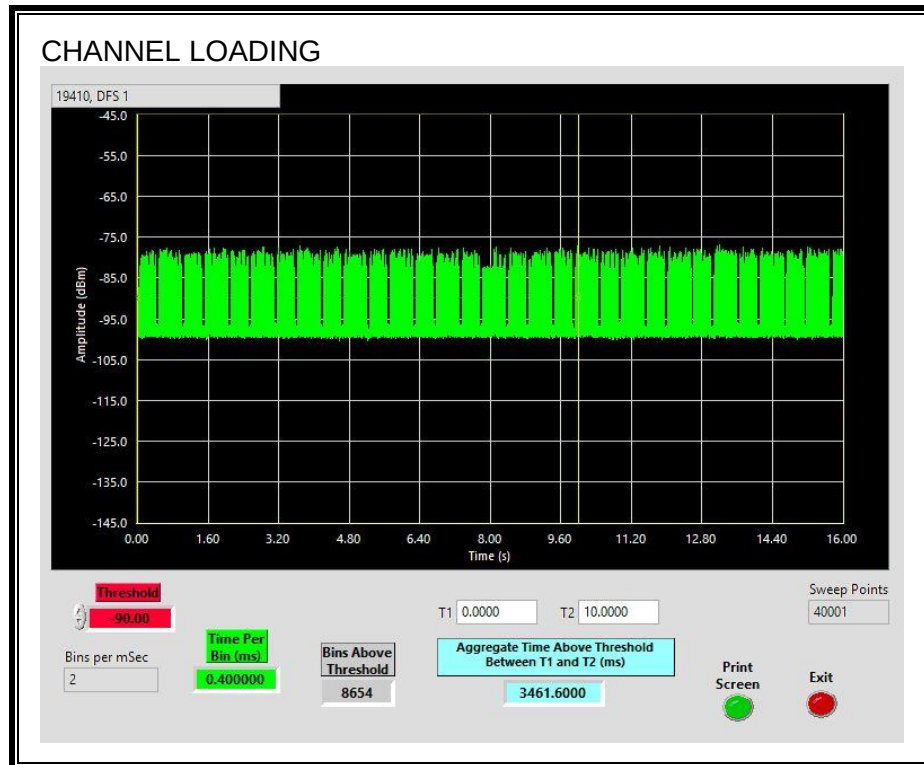

The level of traffic loading on the channel by the EUT is 34.61%

### 6.8.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.8.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS

| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 0.032                      | 10             |

| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 0.0                                                   | 60              |


## MOVE TIME

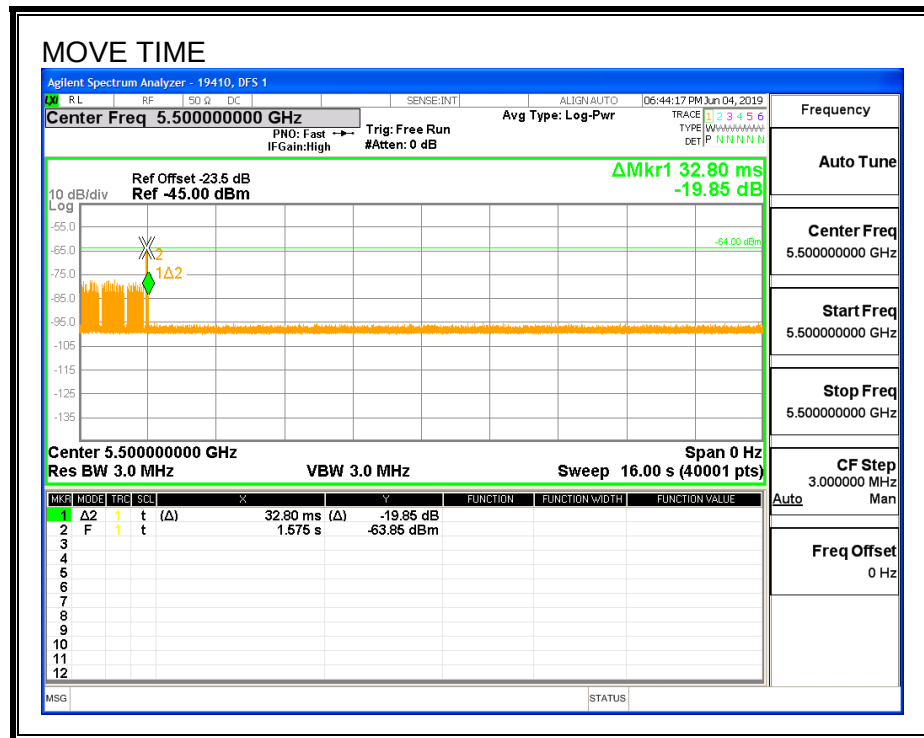



### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

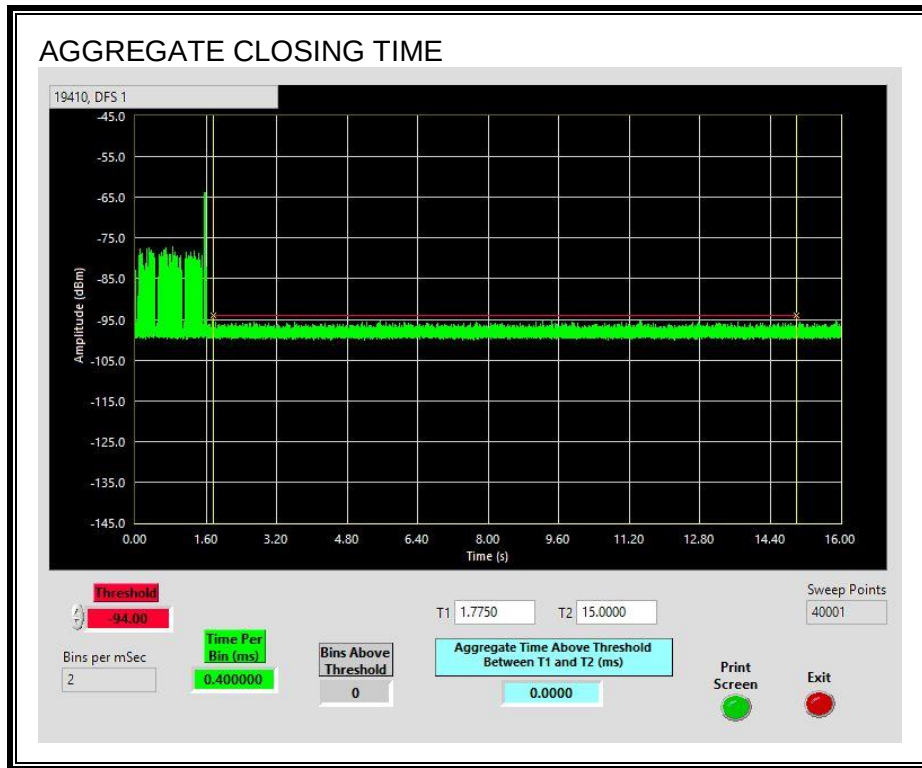




## 6.9. PEER TO PEER MODE EUT RESULTS FOR 40 MHz BANDWIDTH

### 6.9.1. TEST CHANNEL

All tests were performed at a channel center frequency of 5510 MHz.


### 6.9.2. RADAR WAVEFORM AND TRAFFIC

#### RADAR WAVEFORM

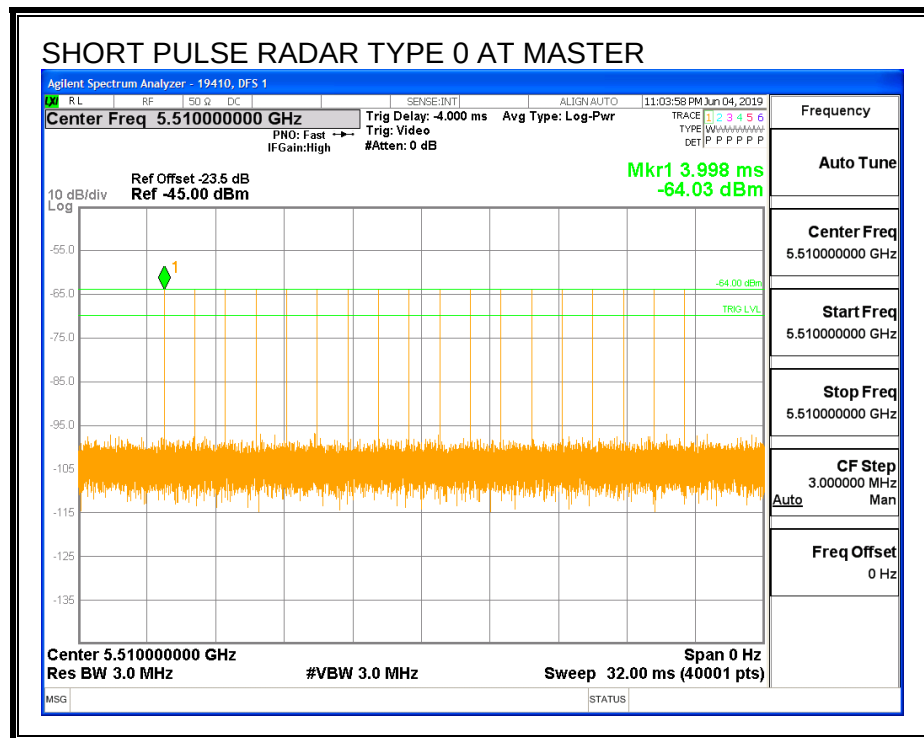



## CHANNEL LOADING

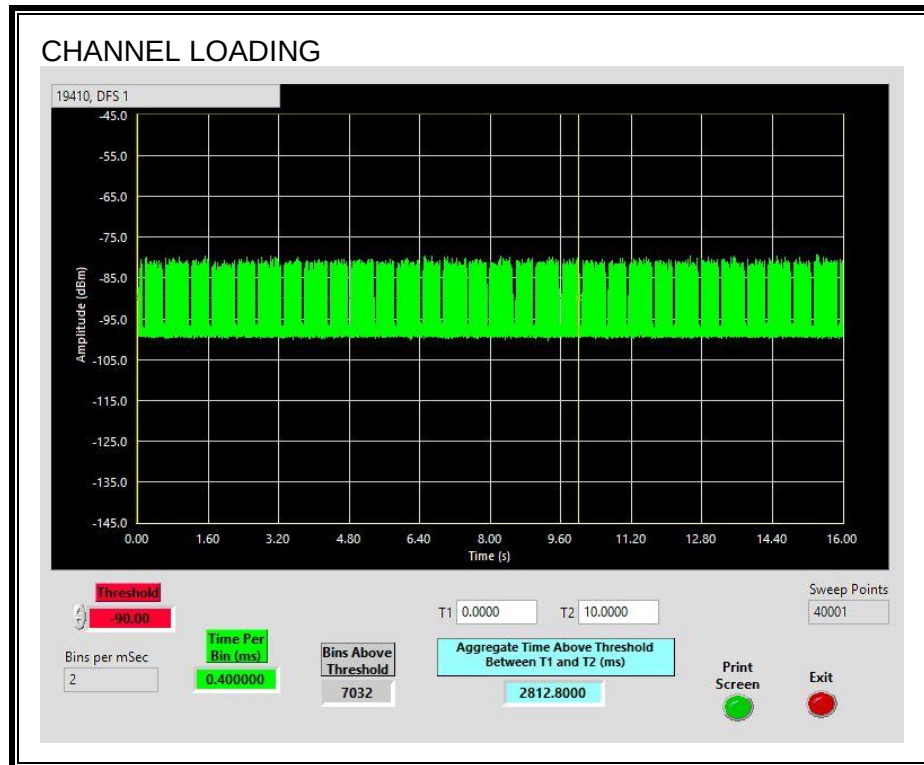

The level of traffic loading on the channel by the EUT is 28.12%

### 6.9.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.9.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS

| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 0.049                      | 10             |

| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 0.0                                                   | 60              |


**MOVE TIME**

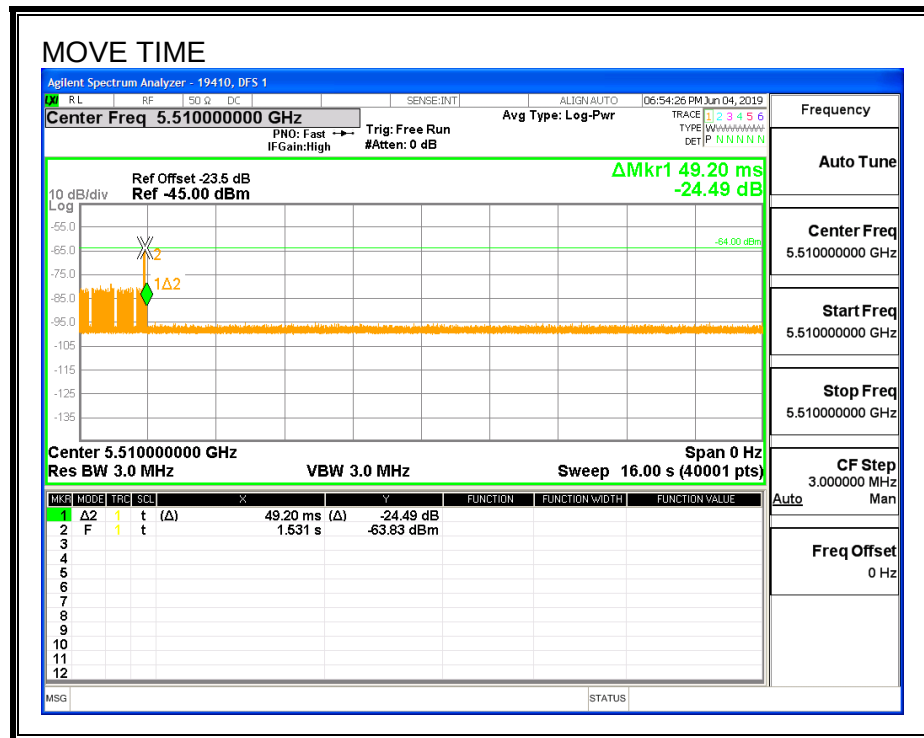



### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

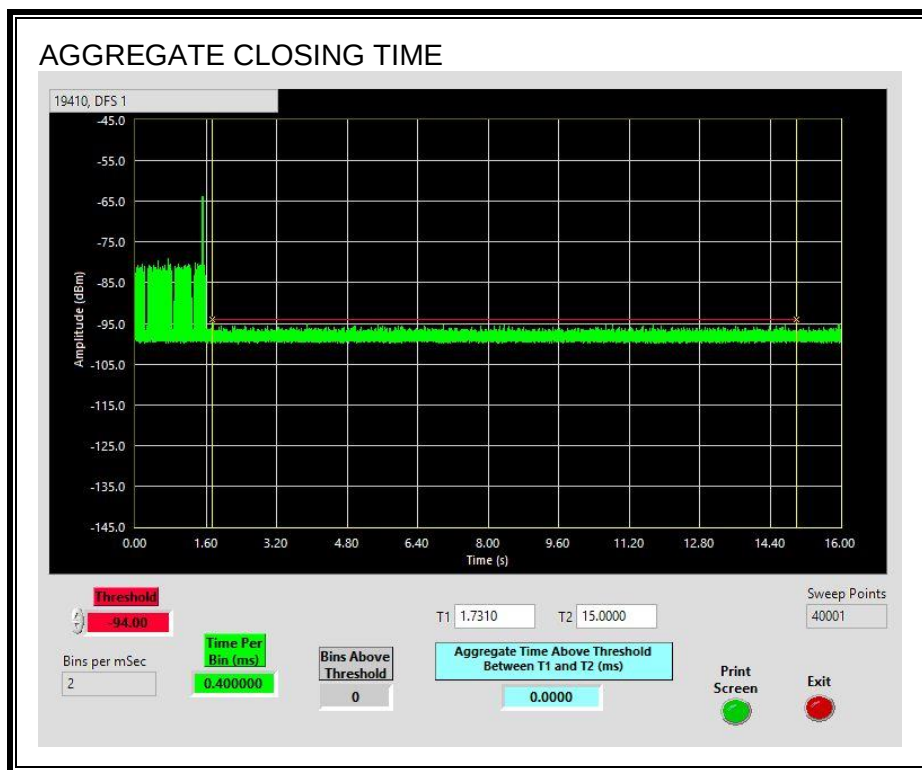


## 6.10. PEER TO PEER MODE EUT RESULTS FOR 80 MHz BANDWIDTH

### 6.10.1. TEST CHANNEL

All tests were performed at a channel center frequency of 5530 MHz.


### 6.10.2. RADAR WAVEFORM AND TRAFFIC

#### RADAR WAVEFORM

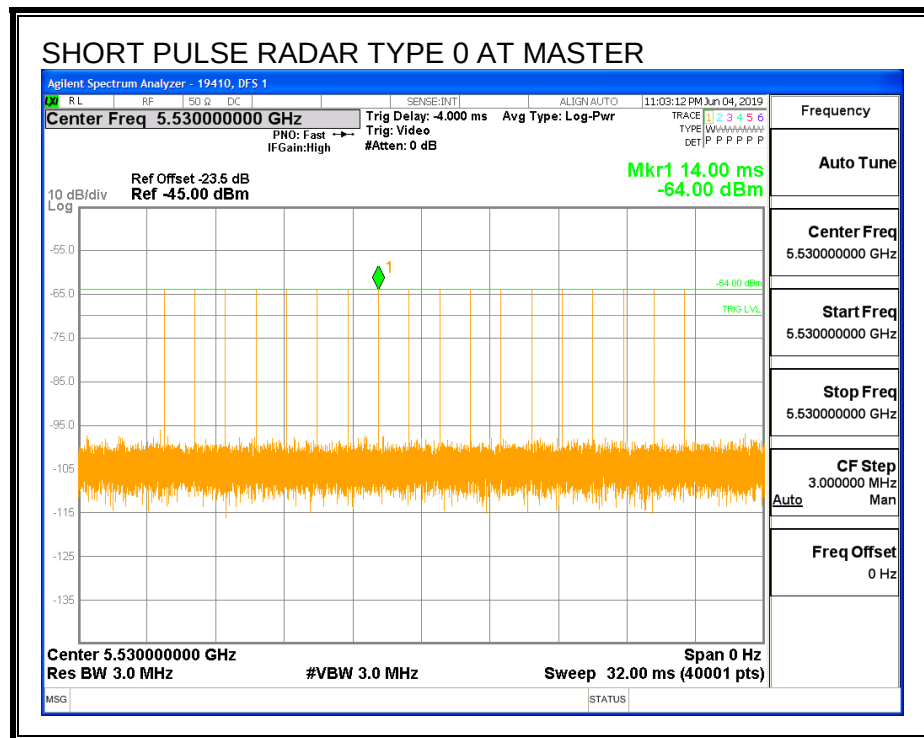




**TRAFFIC**

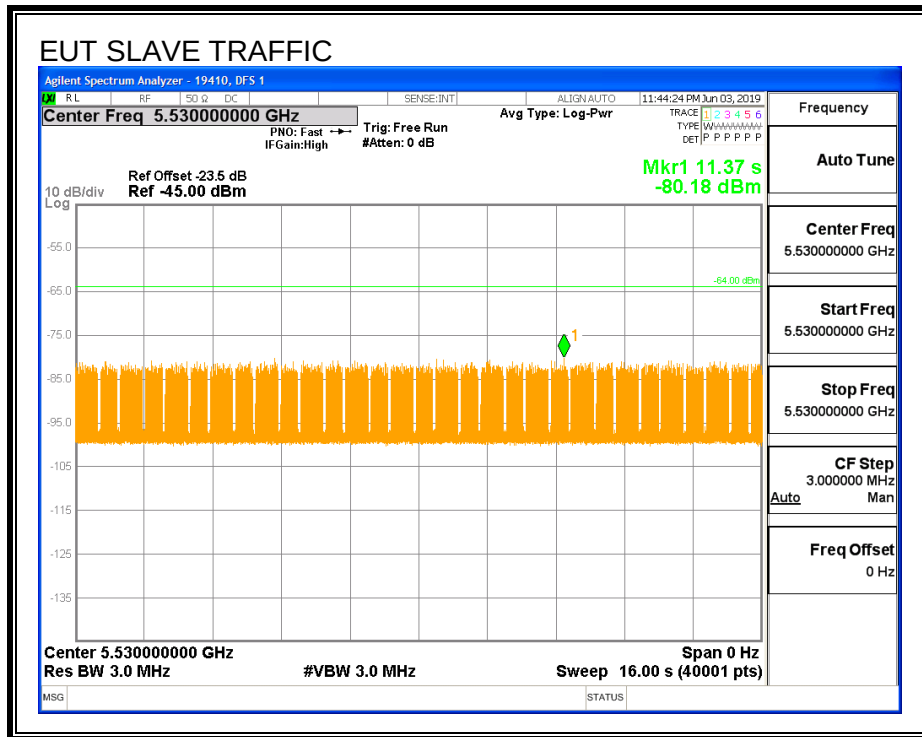

## CHANNEL LOADING

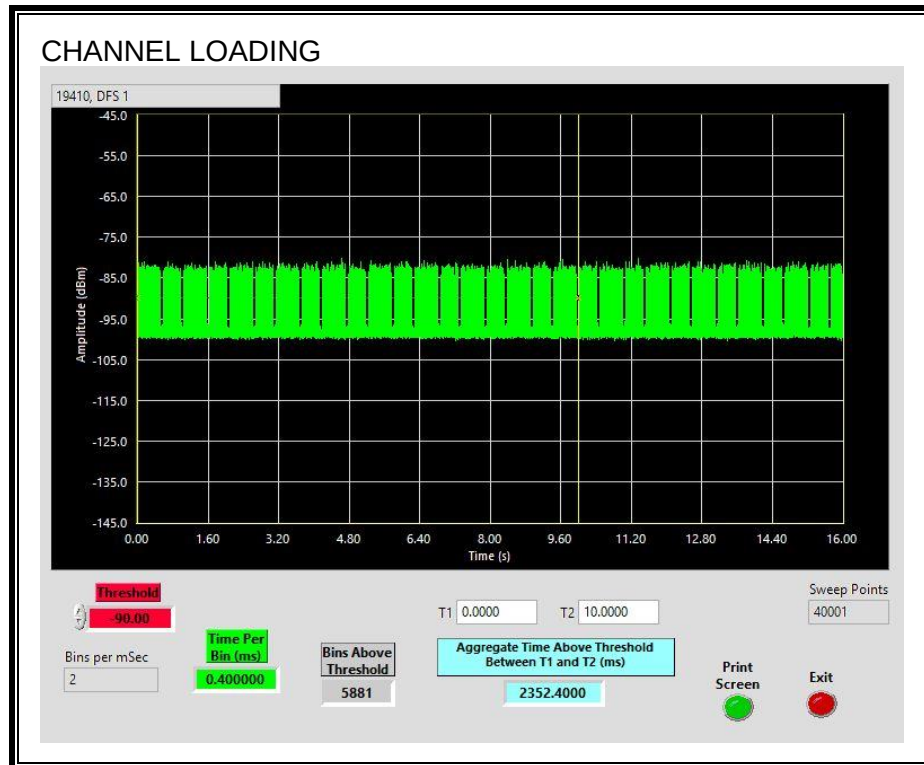

The level of traffic loading on the channel by the EUT is 23.52%

### 6.10.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.10.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS

| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 0.064                      | 10             |

| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 0.0                                                   | 60              |

## MOVE TIME

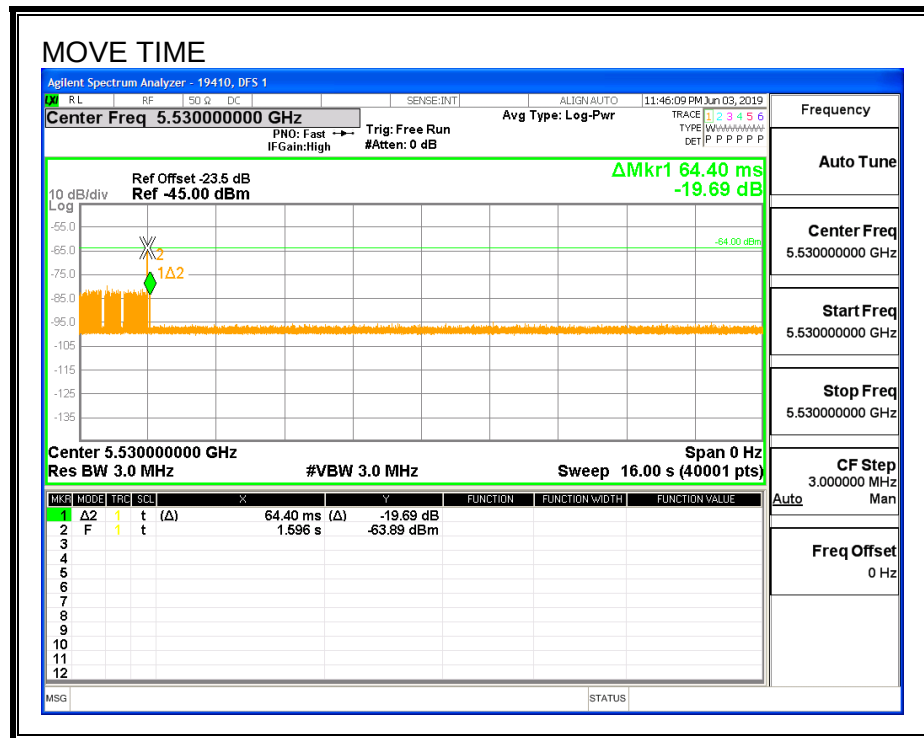



### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.



## 6.10.5. 30-MINUTE NON-OCCUPANCY PERIOD

### RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

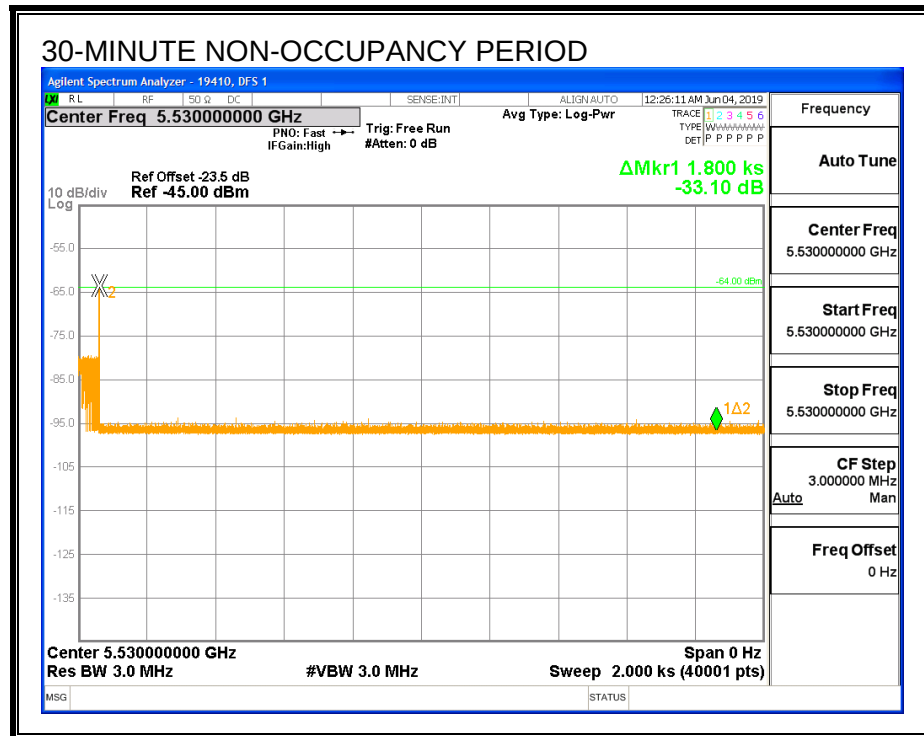


## 6.11. PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 20 MHz BANDWIDTH

### 6.11.1. TEST CHANNEL

All tests were performed at a channel center frequency of 5500 MHz.


### 6.11.2. RADAR WAVEFORM AND TRAFFIC

#### RADAR WAVEFORM

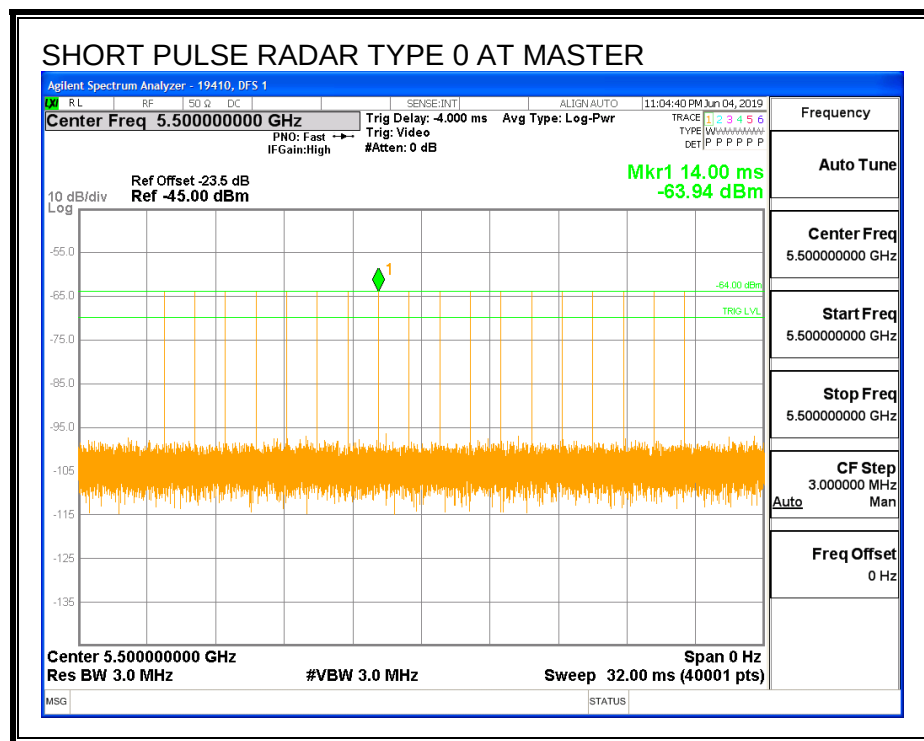




**TRAFFIC**

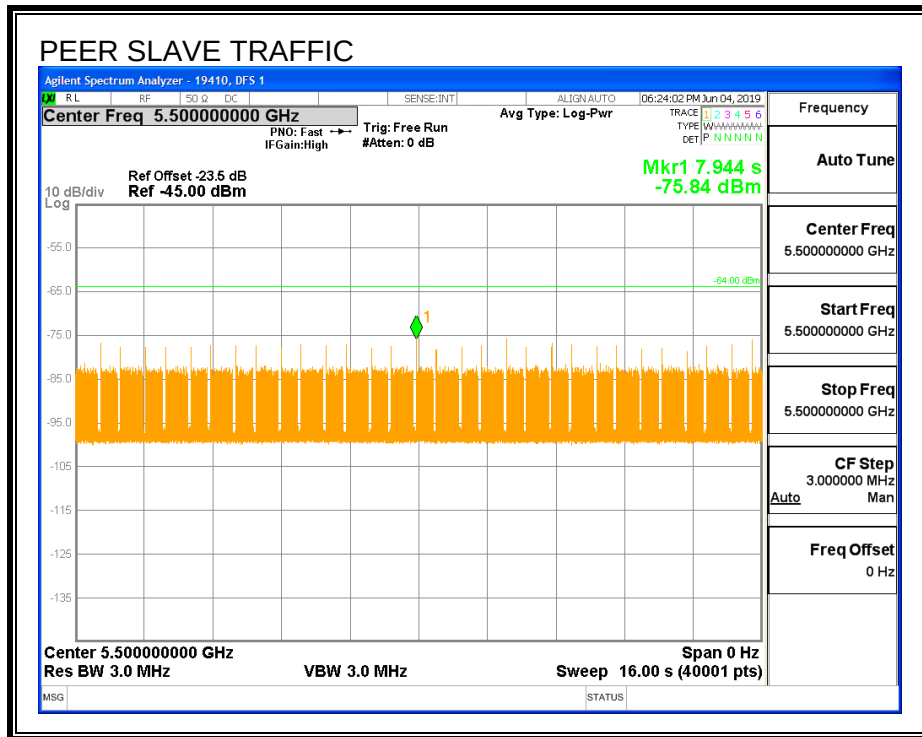

## CHANNEL LOADING

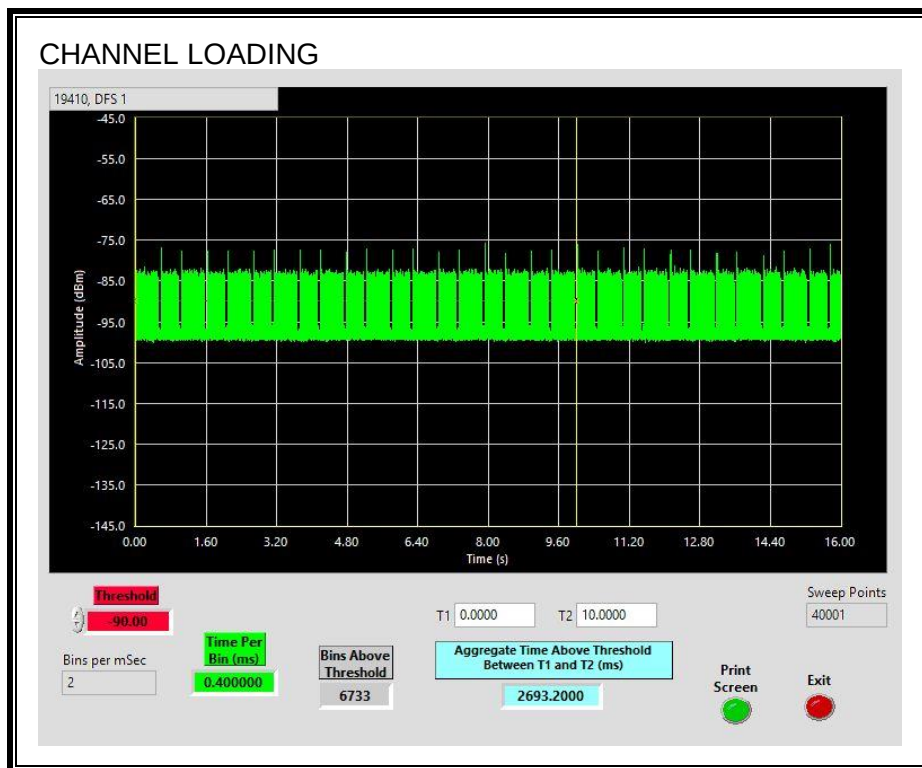

The level of traffic loading on the channel by the Peer Slave is 26.93%

### 6.11.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.11.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 0.129                      | 10             |

| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 0.0                                                   | 60              |

## MOVE TIME

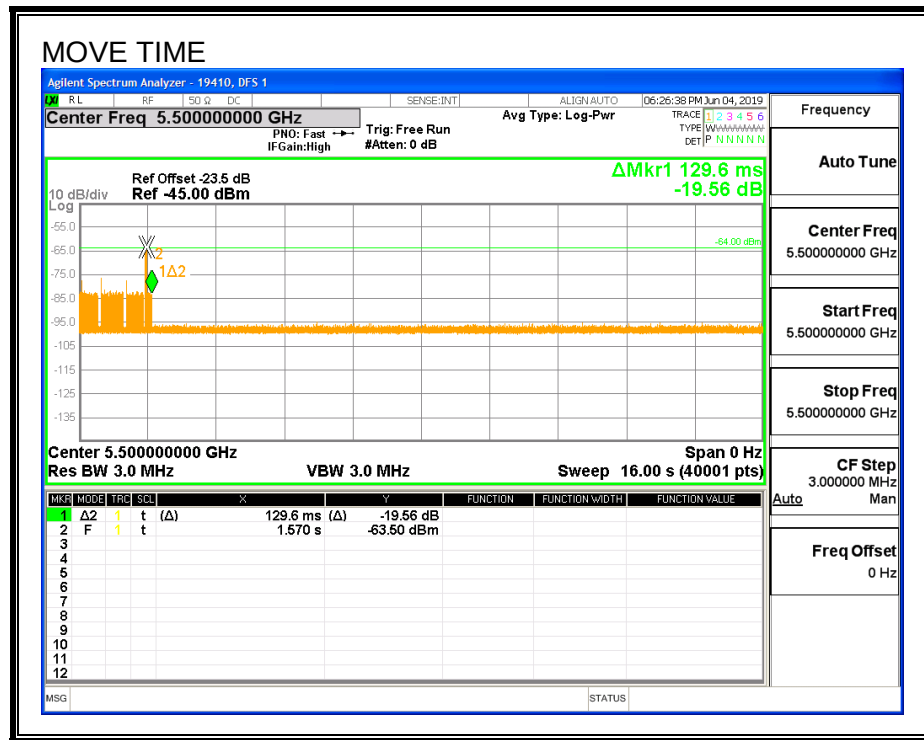


# **CHANNEL CLOSING TIME**

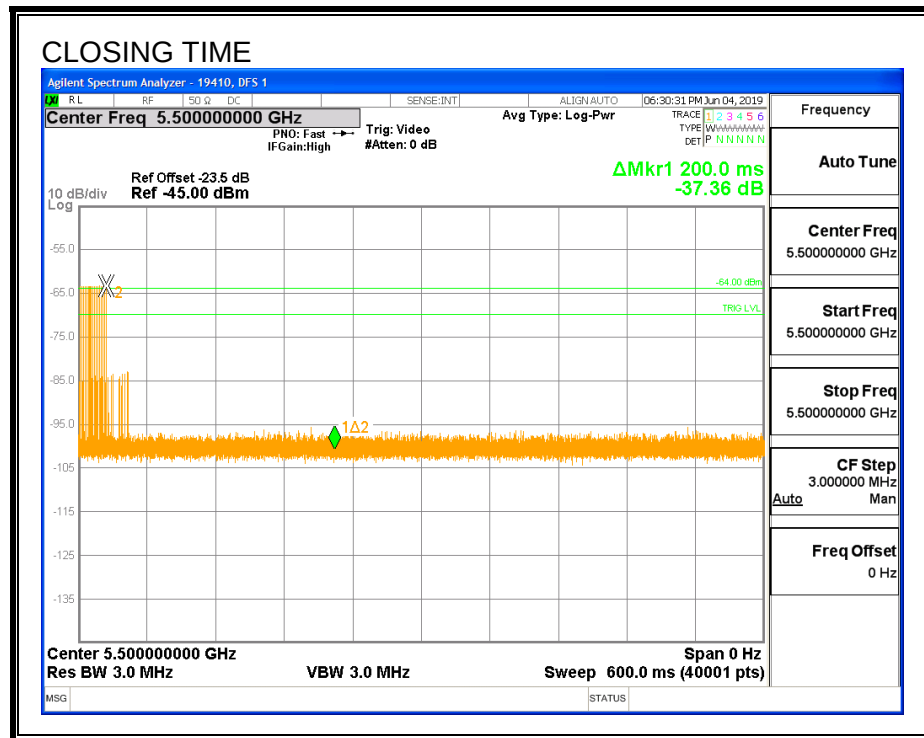

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

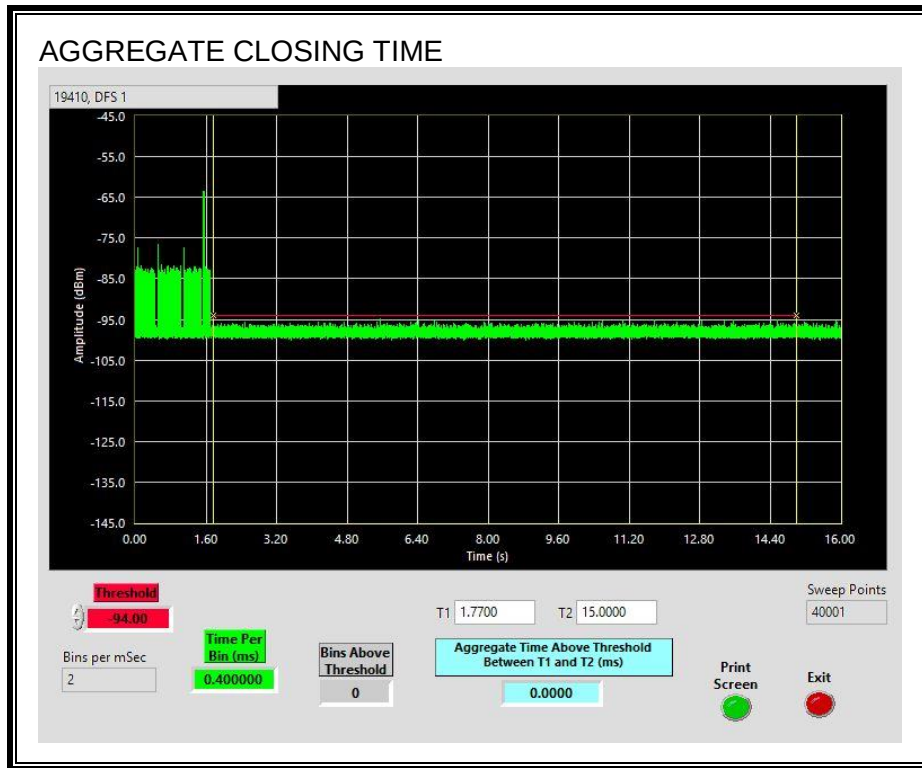


## 6.12. PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 40 MHz BANDWIDTH

### 6.12.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

### 6.12.2. RADAR WAVEFORM AND TRAFFIC

#### RADAR WAVEFORM

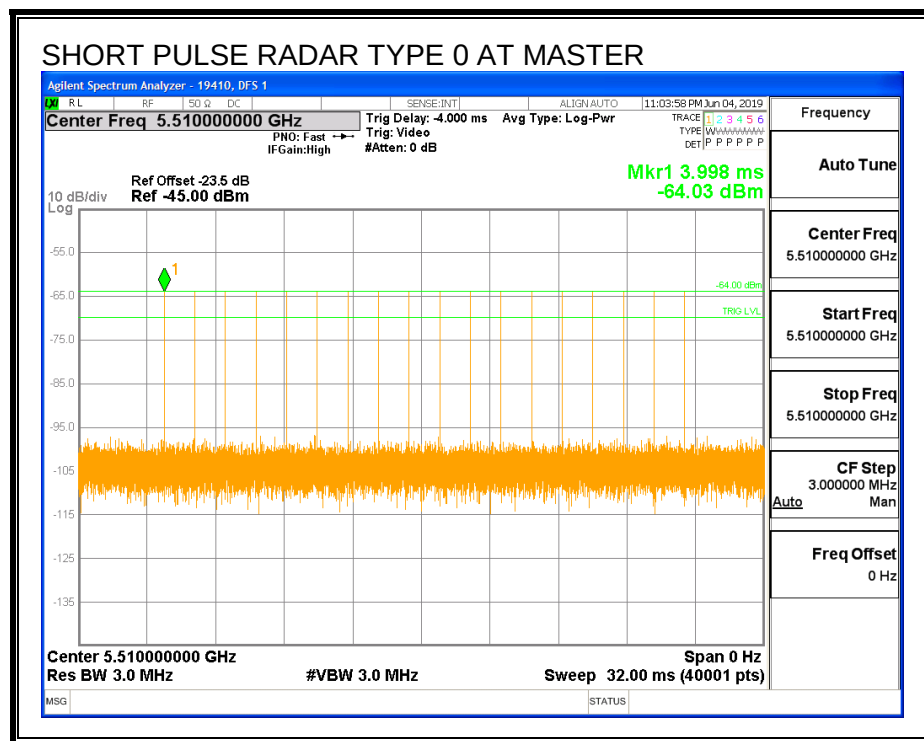


**TRAFFIC**

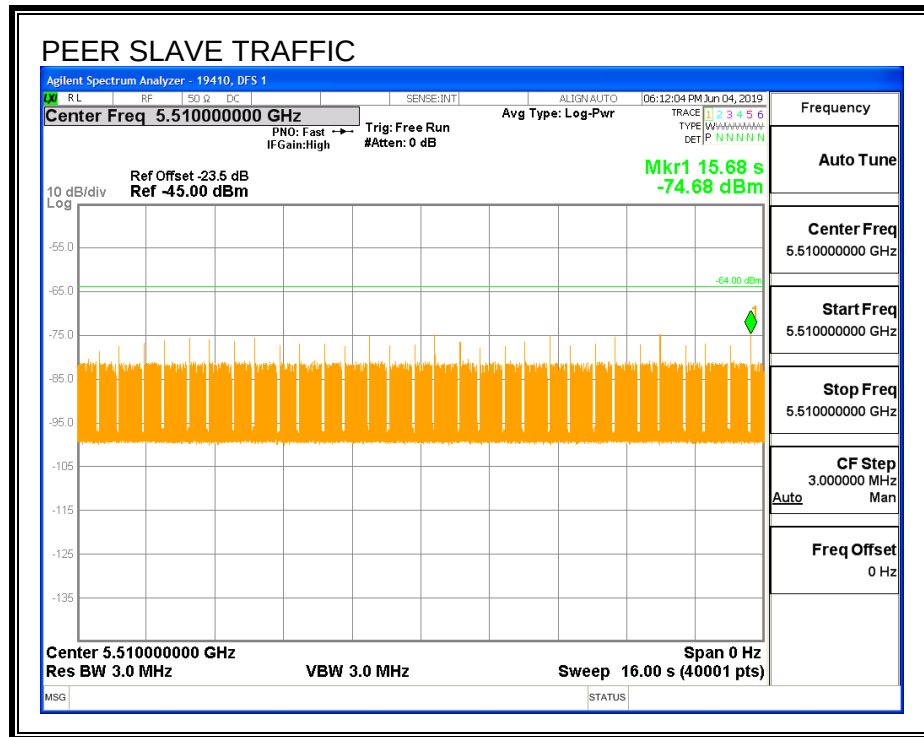



## CHANNEL LOADING

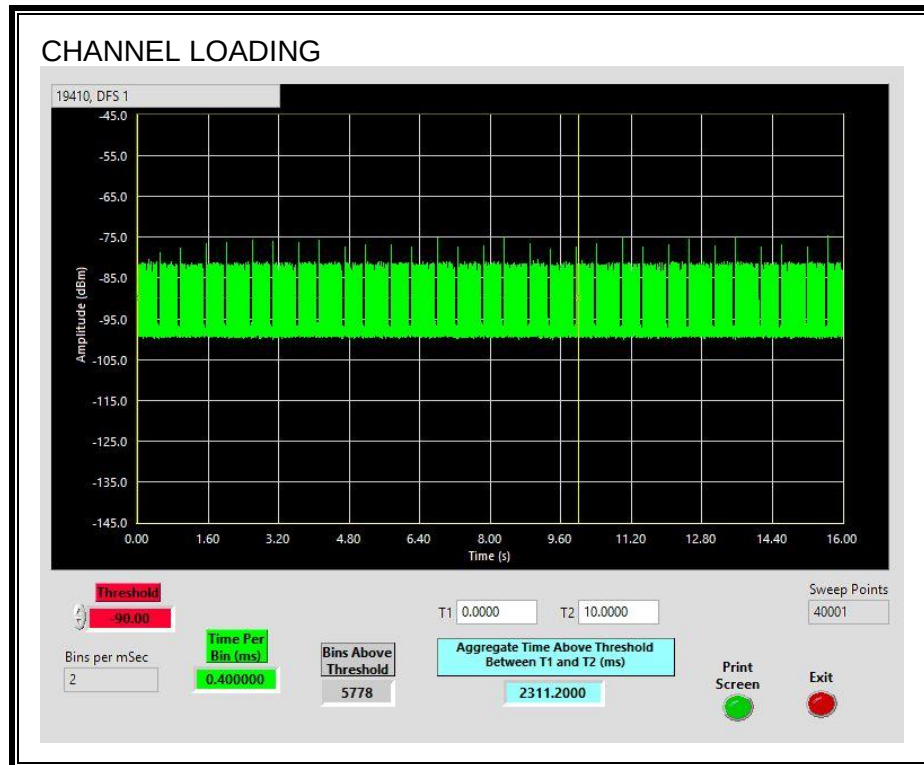

The level of traffic loading on the channel by the Peer Slave is 23.11%

### 6.12.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.12.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS

| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 0.103                      | 10             |

| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 0.0                                                   | 60              |


## MOVE TIME

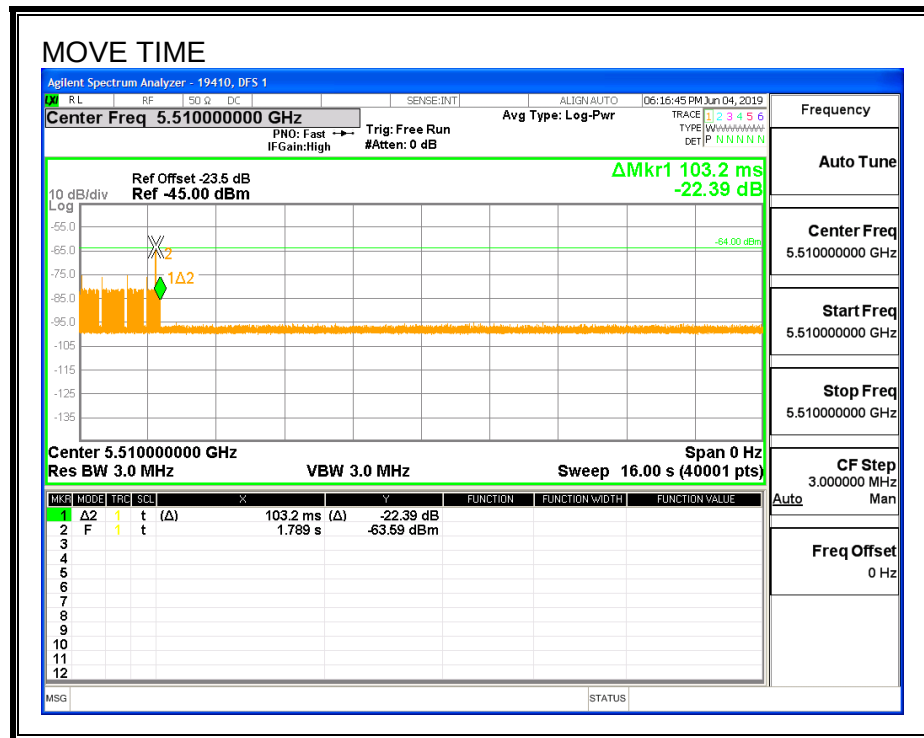



### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

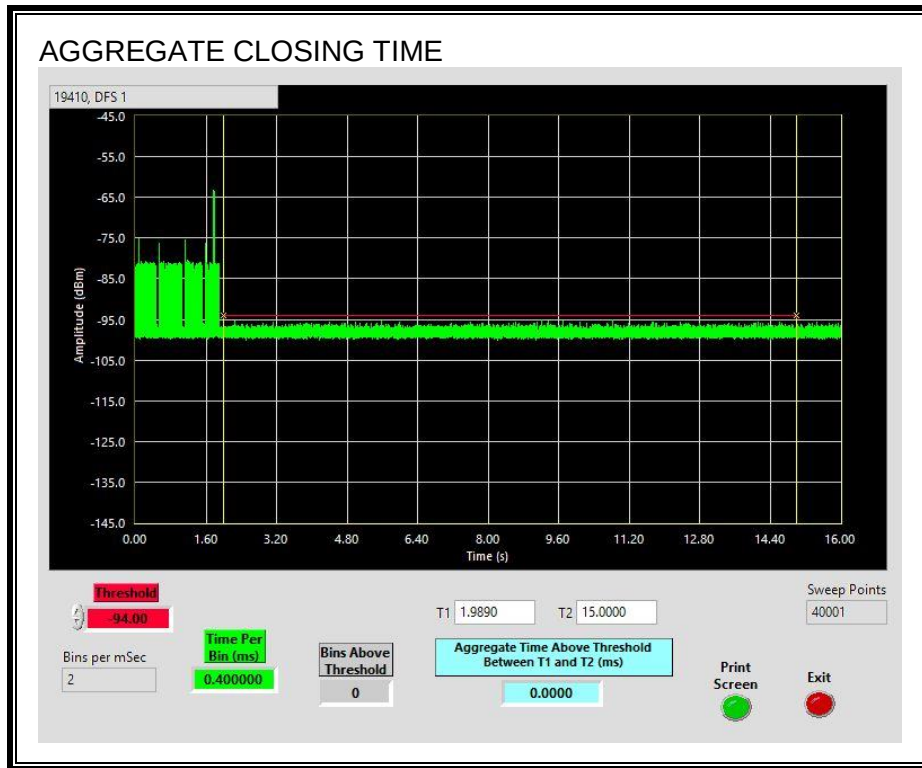


## 6.13. PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 80 MHz BANDWIDTH

### 6.13.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

### 6.13.2. RADAR WAVEFORM AND TRAFFIC


#### RADAR WAVEFORM

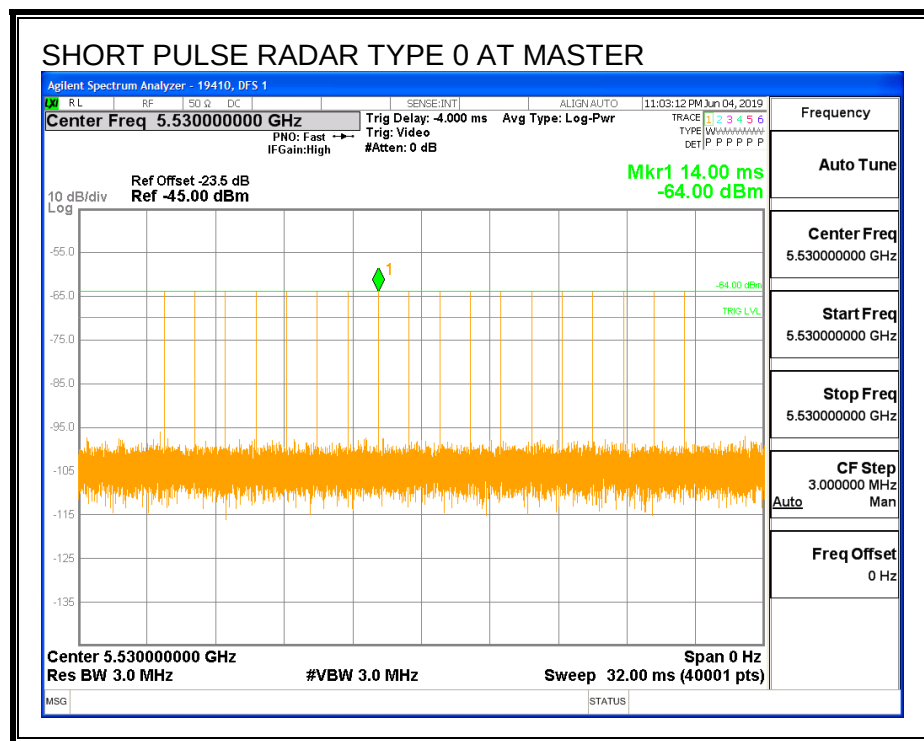

**TRAFFIC**

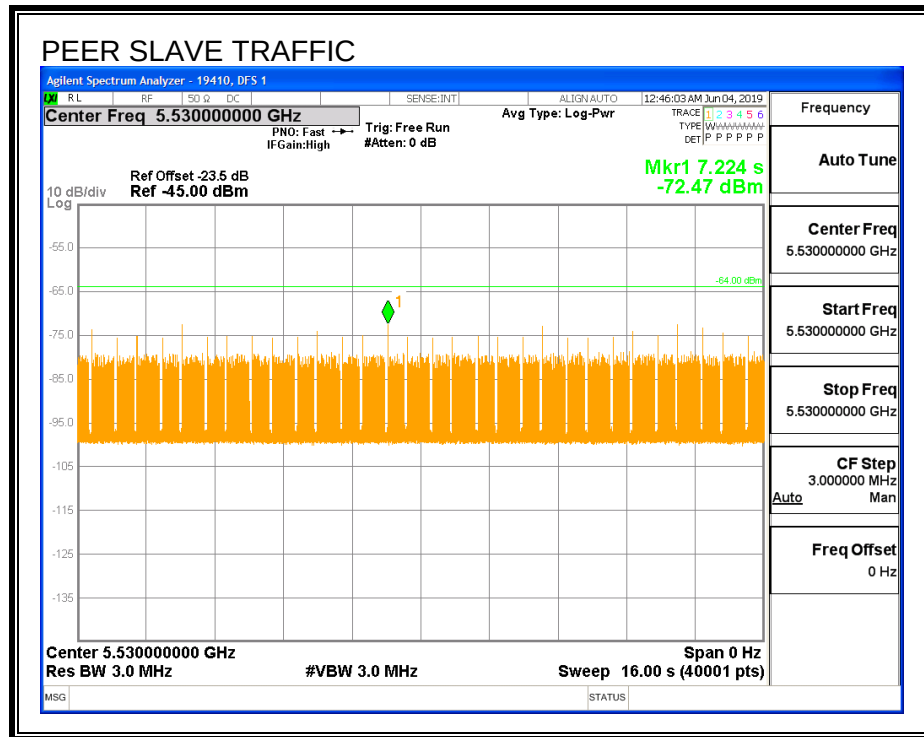

## CHANNEL LOADING

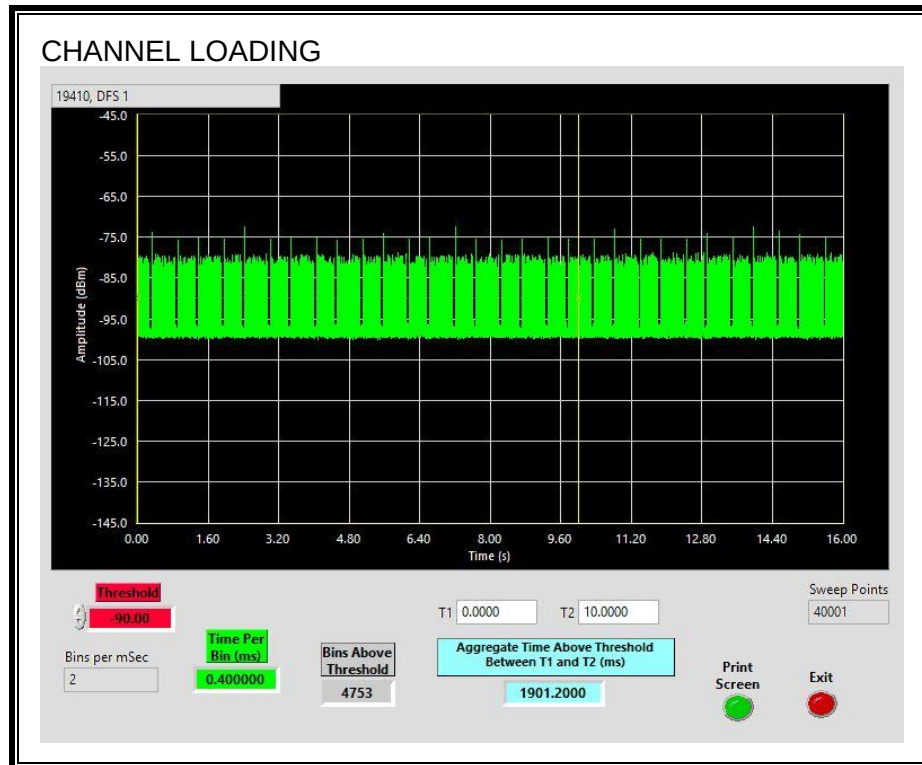

The level of traffic loading on the channel by the Peer Slave is 19.01%



### 6.13.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 6.13.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS

| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 0.061                      | 10             |

| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 0.0                                                   | 60              |

## MOVE TIME

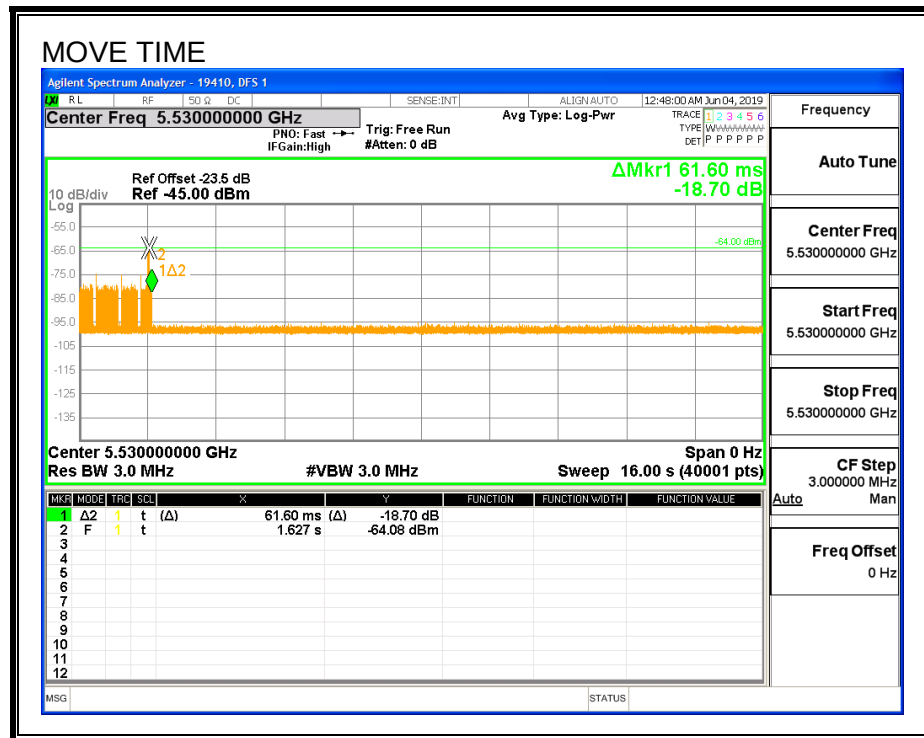



### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.



## 6.13.5. 30-MINUTE NON-OCCUPANCY PERIOD

### RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

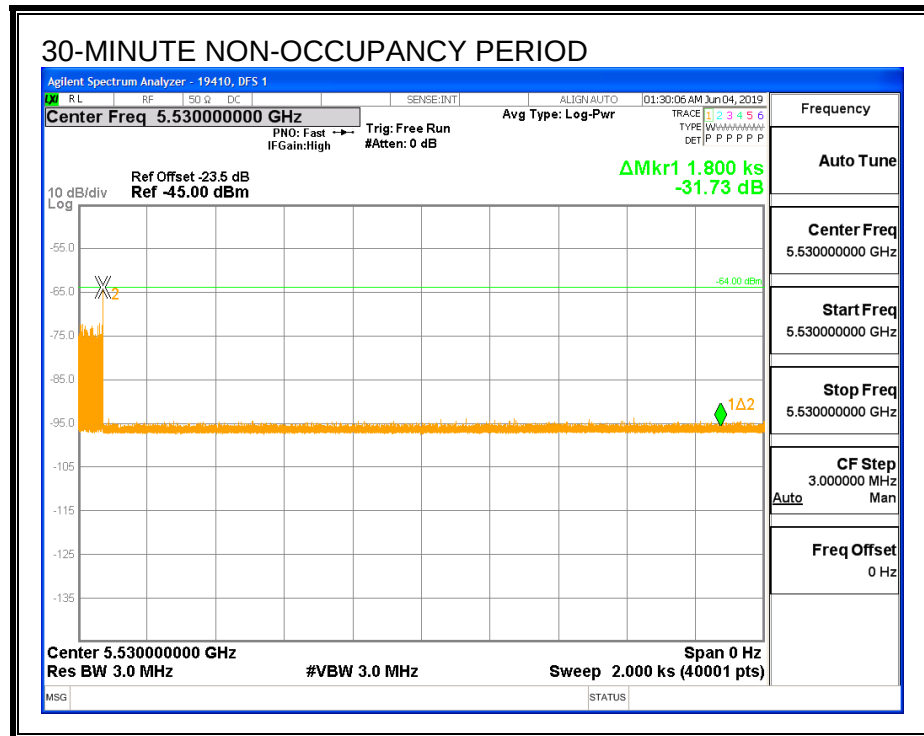

**END OF REPORT**

## 7. SETUP PHOTOS

Please refer to 12943451-EP1V1 for setup photos.