
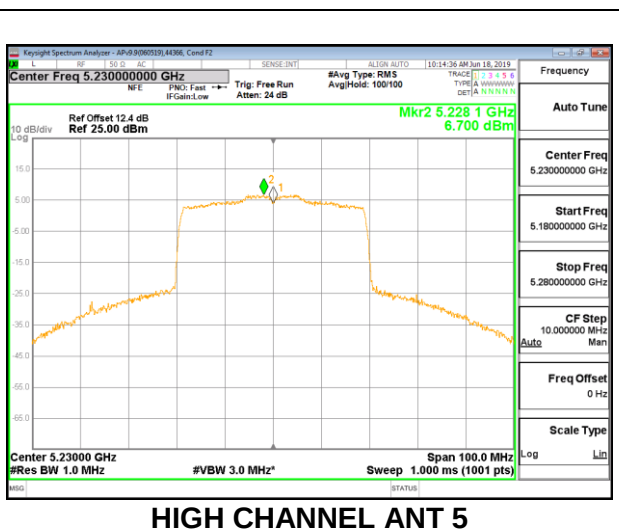
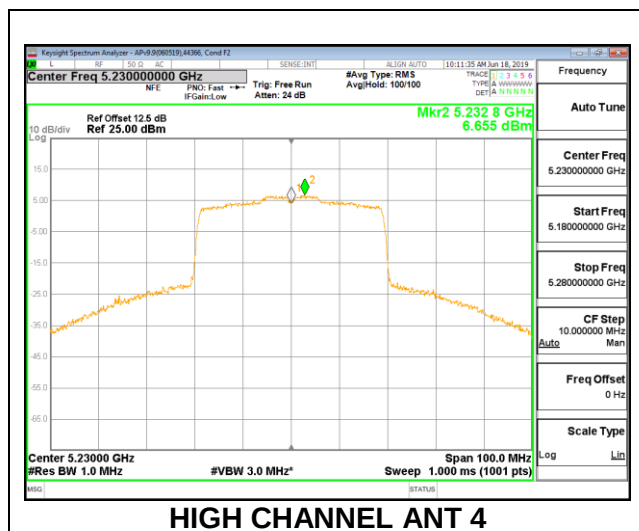
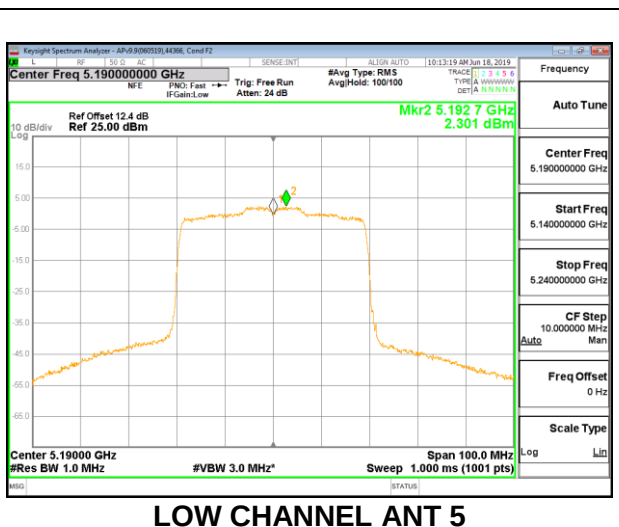


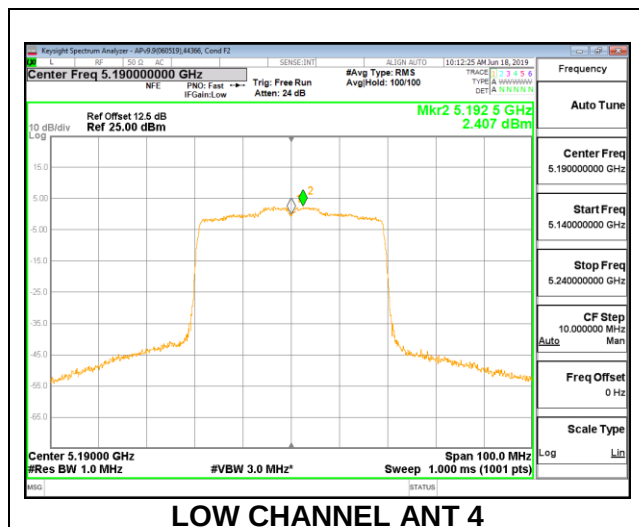

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 0**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5190	20.700	-2.89	-0.20
High	5230	20.200	-2.89	-0.20

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	25.89	24.00	11.00
High	5230	24.00	23.00	25.89	24.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	8.670	8.700	11.695	24.00	-12.30
High	5230	8.710	8.710	11.720	24.00	-12.28

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/ 1MHz)	Ant 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	6.218	6.349	9.294	11.00	-1.71
High	5230	6.361	6.327	9.354	11.00	-1.65

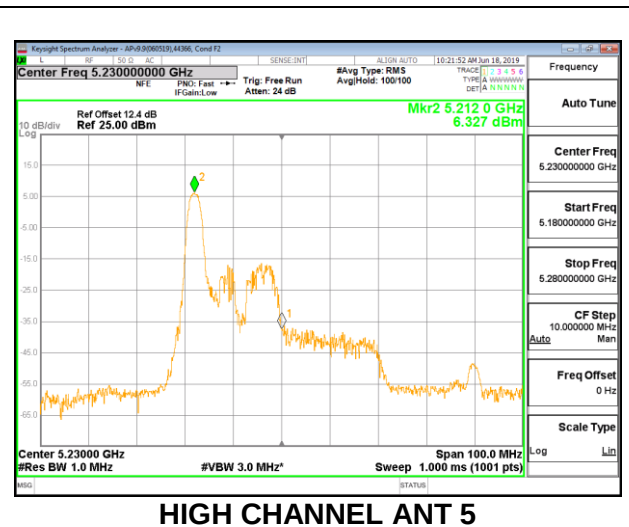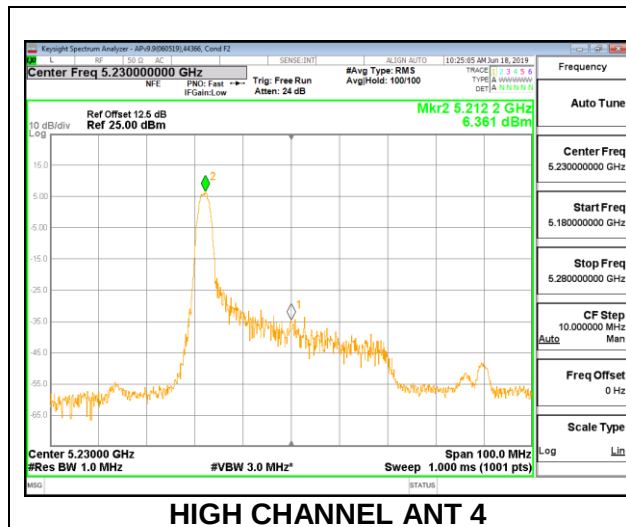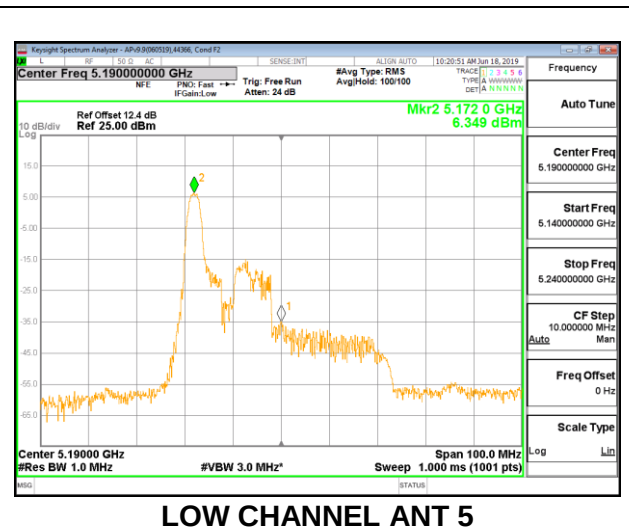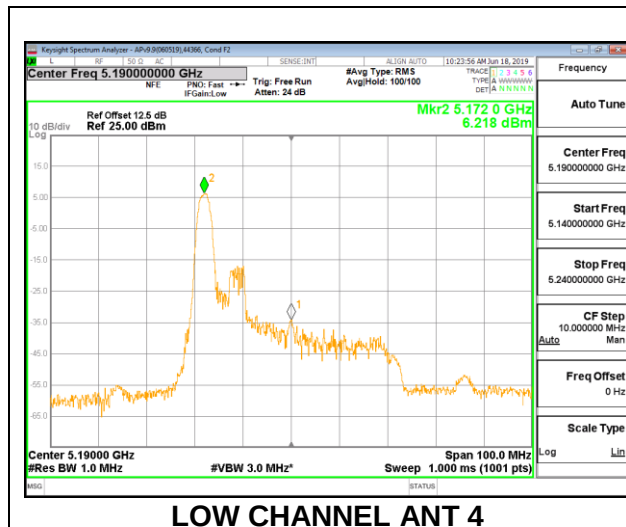

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 8

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5190	23.800	-2.89	-0.20
High	5230	24.800	-2.89	-0.20

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	25.89	24.00	11.00
High	5230	24.00	23.00	25.89	24.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	8.690	8.670	11.690	24.00	-12.31
High	5230	8.700	8.670	11.695	24.00	-12.30

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/ 1MHz)	Ant 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	6.410	6.257	9.344	11.00	-1.66
High	5230	6.384	6.241	9.323	11.00	-1.68

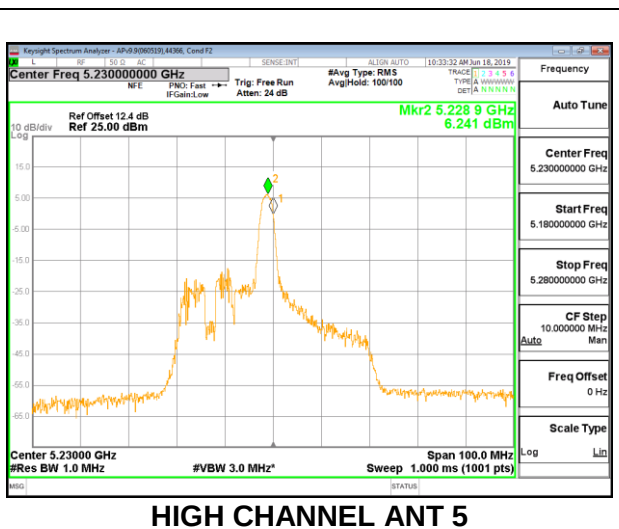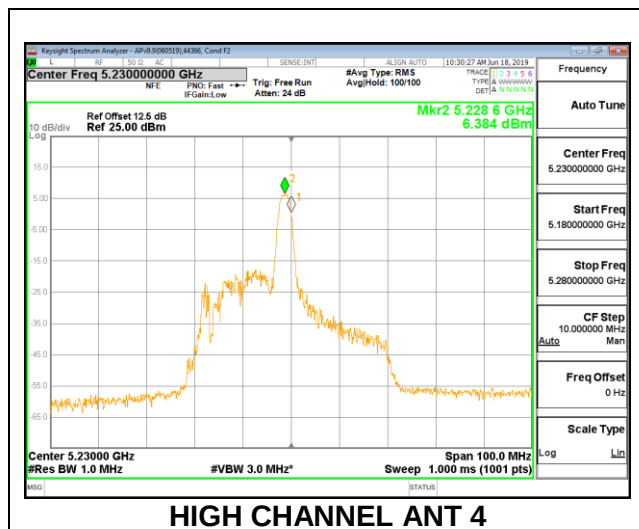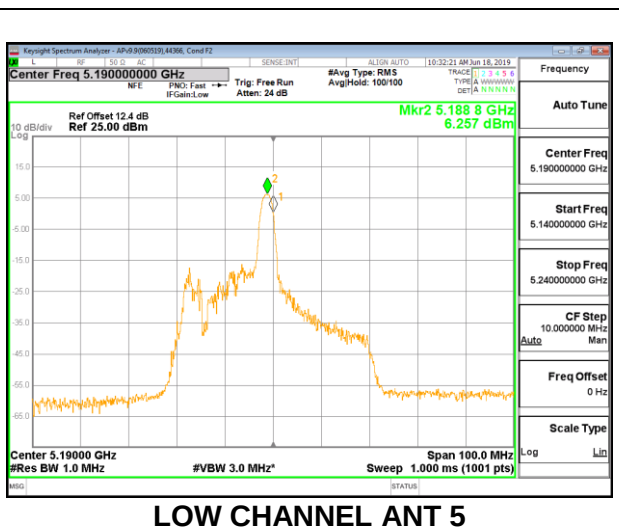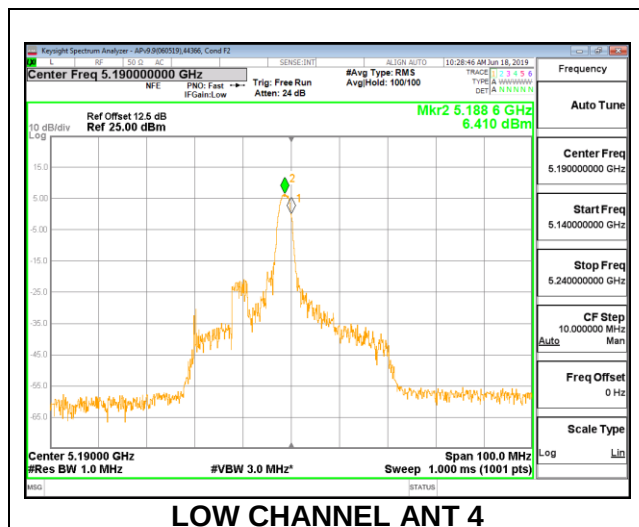

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 17**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5190	20.300	-2.89	-0.20
High	5230	20.500	-2.89	-0.20

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Low	5190	24.00	23.00	25.89	24.00	11.00
High	5230	24.00	23.00	25.89	24.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	8.700	8.700	11.710	24.00	-12.29
High	5230	8.690	8.670	11.690	24.00	-12.31

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/ 1MHz)	Ant 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	6.371	6.386	9.389	11.00	-1.61
High	5230	6.314	6.319	9.327	11.00	-1.67

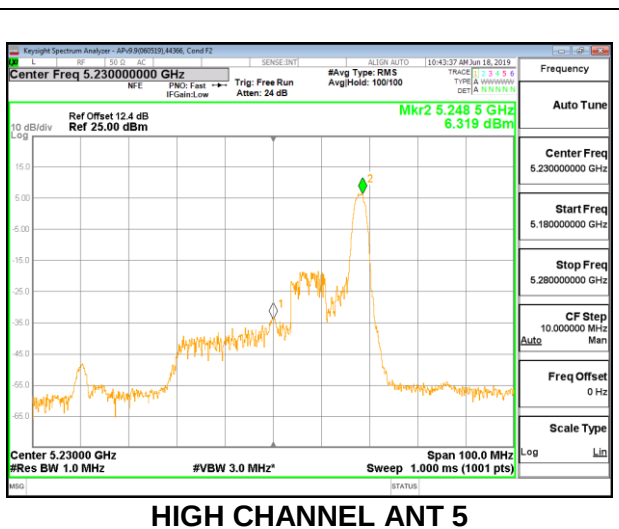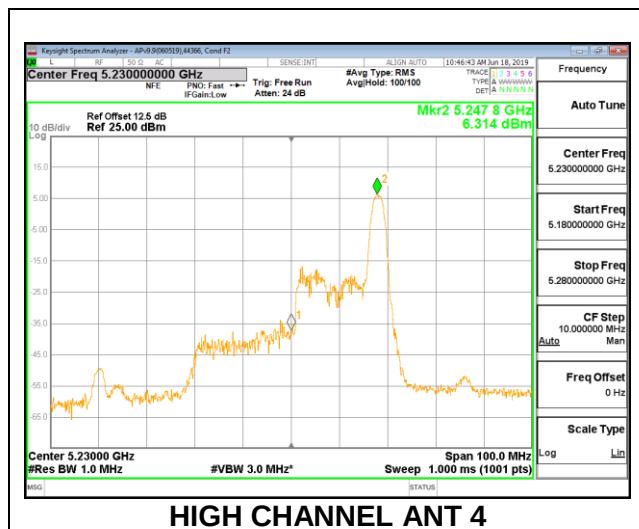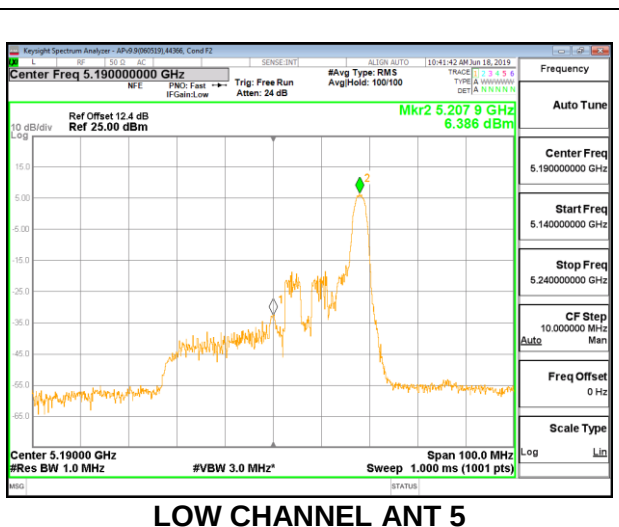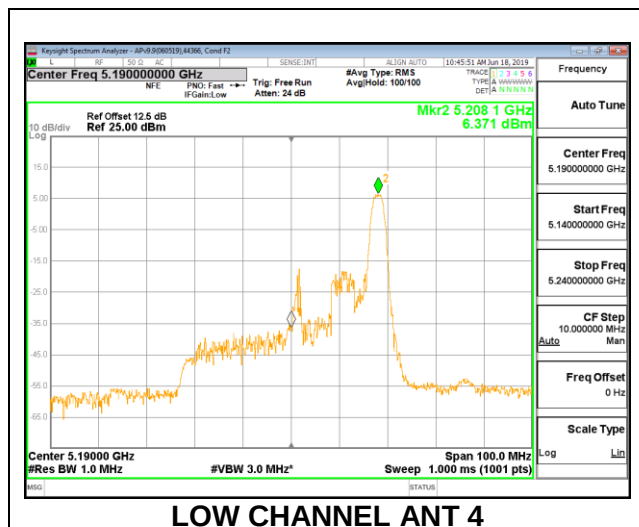

8.5.6. 802.11ax HE80 MODE IN THE 5.2 GHz BAND

1TX Antenna 4 MODE (FCC) MOBILE – 996 Tones, RU Index 67

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain (dBi)
Mid	5210	83.000	-6.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	29.00	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	15.710	15.710	24.00	-8.29

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	-0.124	-0.124	11.00	-11.12

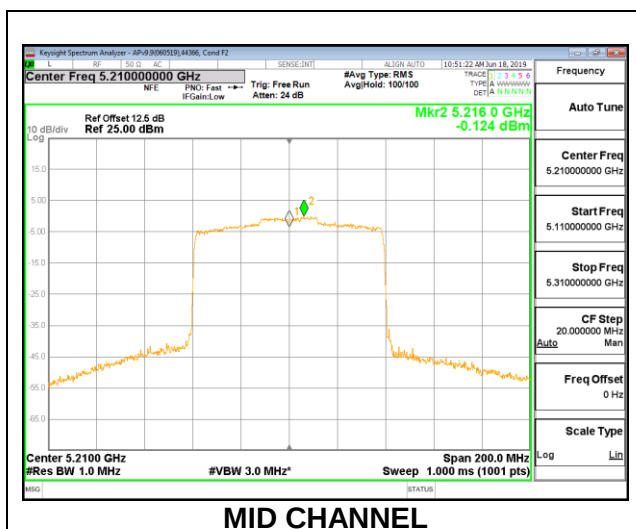

1TX Antenna 4 MODE (FCC) MOBILE – 26 Tones, RU Index 0**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain (dBi)
Mid	5210	20.600	-6.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	29.00	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.690	11.690	24.00	-12.31

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	9.404	9.404	11.00	-1.60

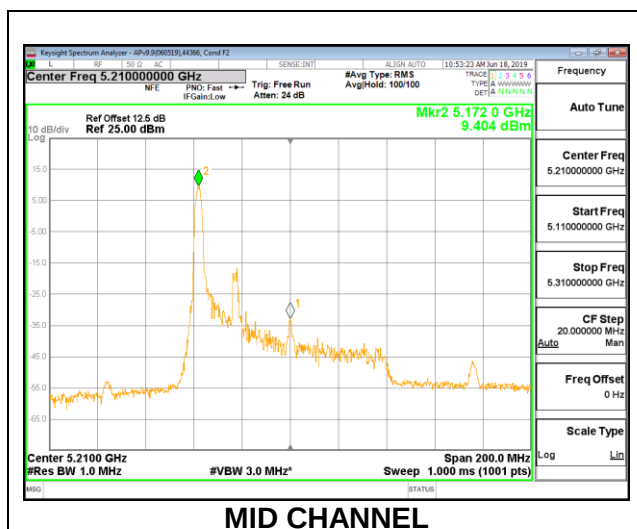

1TX Antenna 4 MODE (FCC) MOBILE – 26 Tones, RU Index 18**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain (dBi)
Mid	5210	44.000	-6.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	29.00	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.670	11.670	24.00	-12.33

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	8.473	8.473	11.00	-2.53

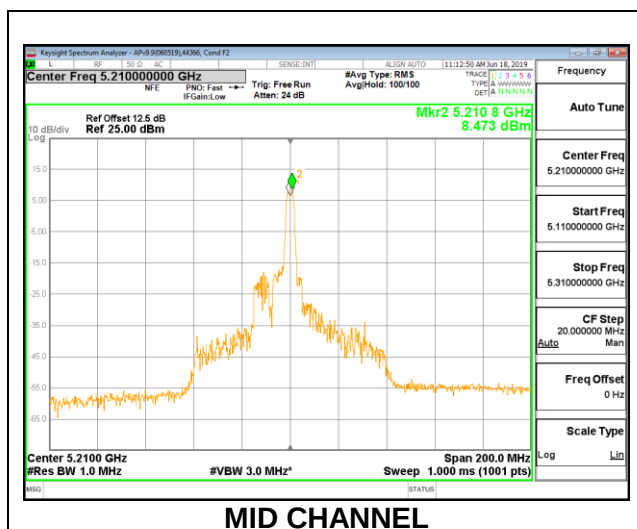

1TX Antenna 4 MODE (FCC) MOBILE – 26 Tones, RU Index 36**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain (dBi)
Mid	5210	22.800	-6.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	29.00	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.690	11.690	24.00	-12.31

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	9.318	9.318	11.00	-1.68

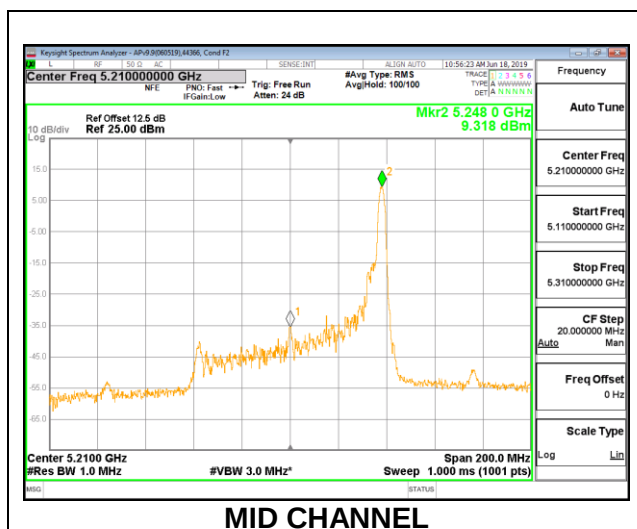

1TX Antenna 5 MODE (FCC) MOBILE – 996 Tones, RU Index 67**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain (dBi)
Mid	5210	83.200	-1.10

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	24.10	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	15.690	15.690	24.00	-8.31

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	-0.179	-0.179	11.00	-11.18

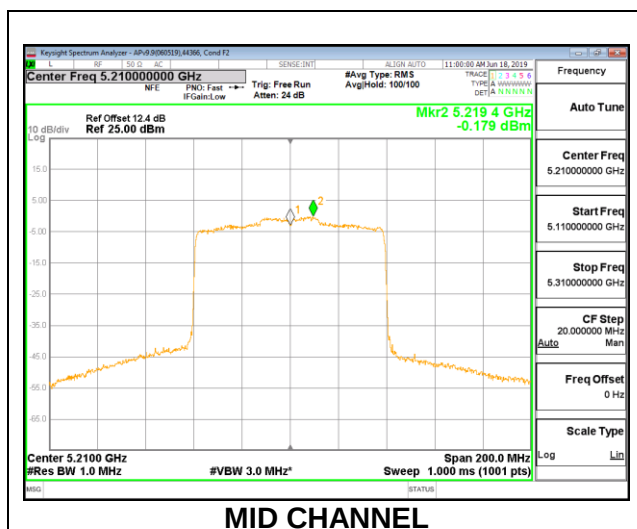

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 0**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain (dBi)
Mid	5210	21.000	-1.10

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	24.10	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.690	11.690	24.00	-12.31

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	9.364	9.364	11.00	-1.64

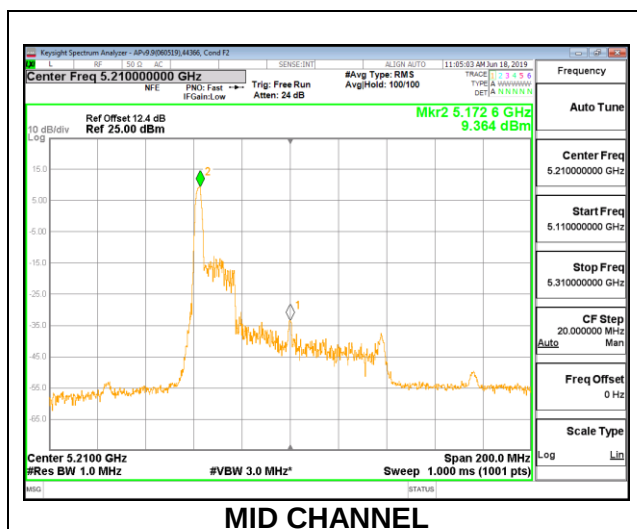

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 18**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain (dBi)
Mid	5210	44.600	-1.10

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	24.10	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.930	11.680	24.00	-12.32

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	8.562	8.562	11.00	-2.44

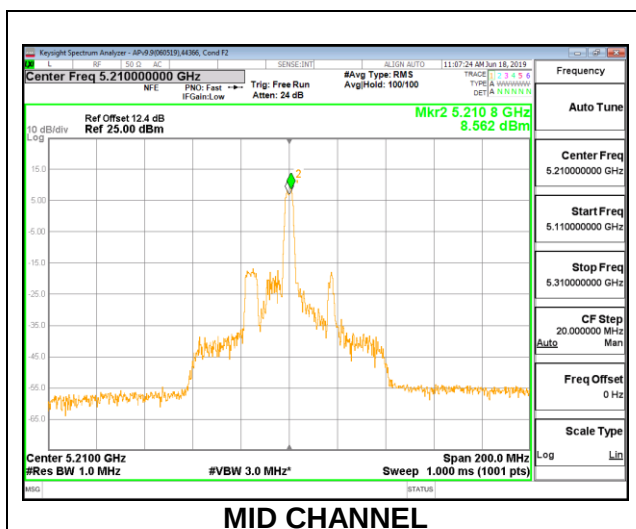

1TX Antenna 5 MODE (FCC) MOBILE – 26 Tones, RU Index 36**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain (dBi)
Mid	5210	22.000	-1.10

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	24.10	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.700	11.700	24.00	-12.30

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	9.338	9.338	11.00	-1.66

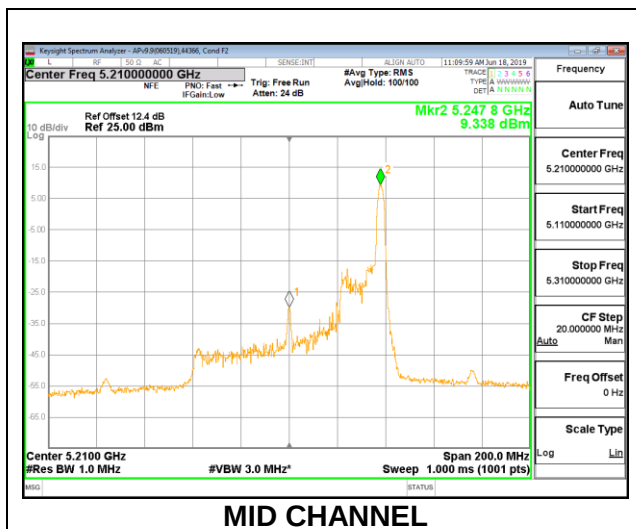

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Mid	5210	83.000	-2.89	-0.20

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	25.89	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	14.700	14.720	17.720	24.00	-6.28

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/ 1MHz)	Ant 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	-1.115	-1.052	1.927	11.00	-9.07

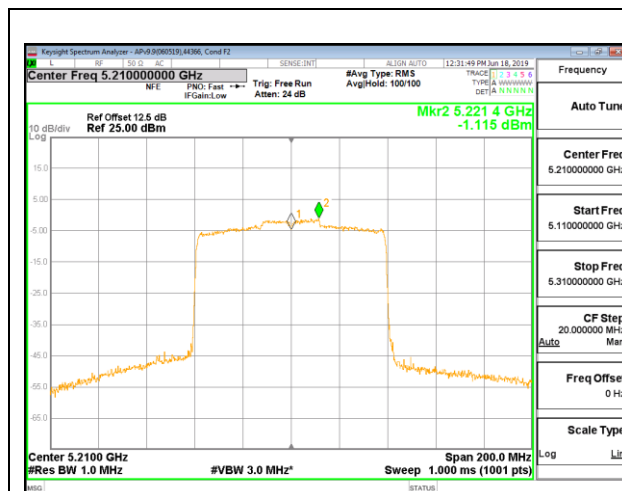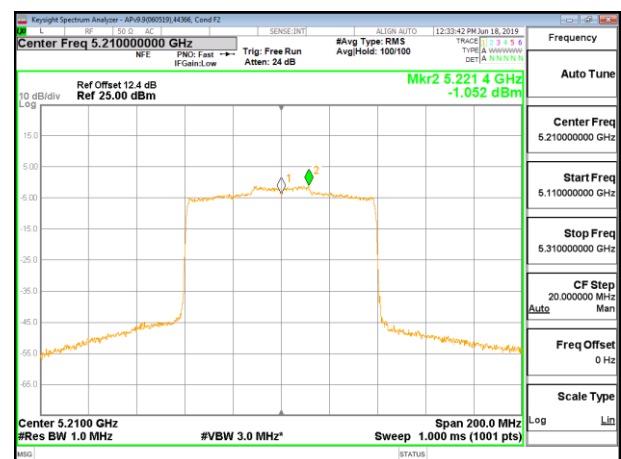**MID CHANNEL ANT 4****MID CHANNEL ANT 5**

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 0**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Mid	5210	21.400	-2.89	-0.20

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	25.89	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	8.710	8.700	11.715	24.00	-12.28

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/ 1MHz)	Ant 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	6.298	6.234	9.276	11.00	-1.72

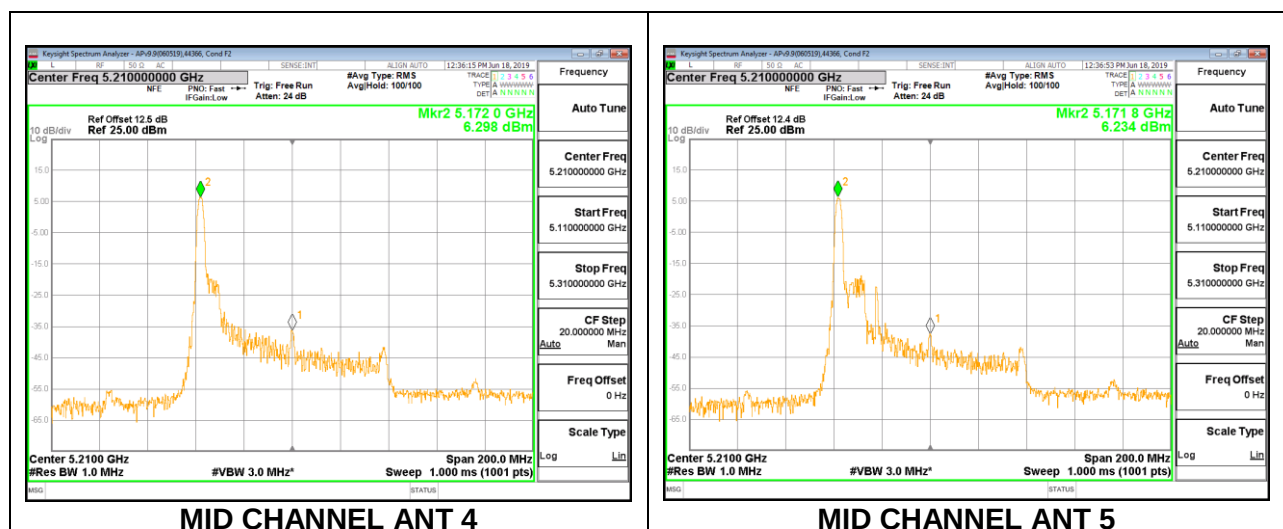

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 18**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Mid	5210	42.400	-2.89	-0.20

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	25.89	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	8.690	8.690	11.700	24.00	-12.30

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/ 1MHz)	Ant 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	5.596	5.606	8.611	11.00	-2.39

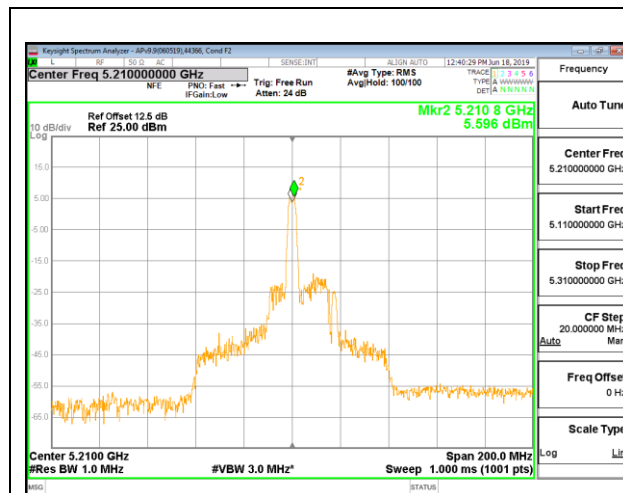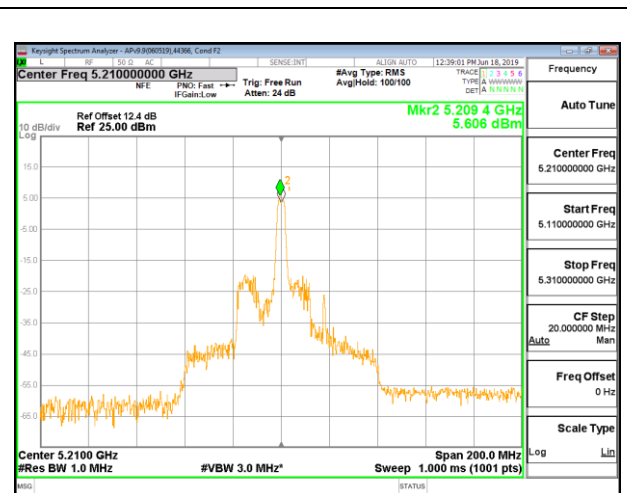**MID CHANNEL ANT 4****MID CHANNEL ANT 5**

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) MOBILE – 26 Tones, RU Index 36**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Mid	5210	21.600	-2.89	-0.20

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED EIRP Limit (dBm)	Max ISED Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)
Mid	5210	24.00	23.00	25.89	24.00	11.00

Duty Cycle CF (dB)

0.00



Included in Calculations of Corr'd Power & PSD

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	8.670	8.700	11.695	24.00	-12.30

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/ 1MHz)	Ant 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	6.210	6.304	9.268	11.00	-1.73

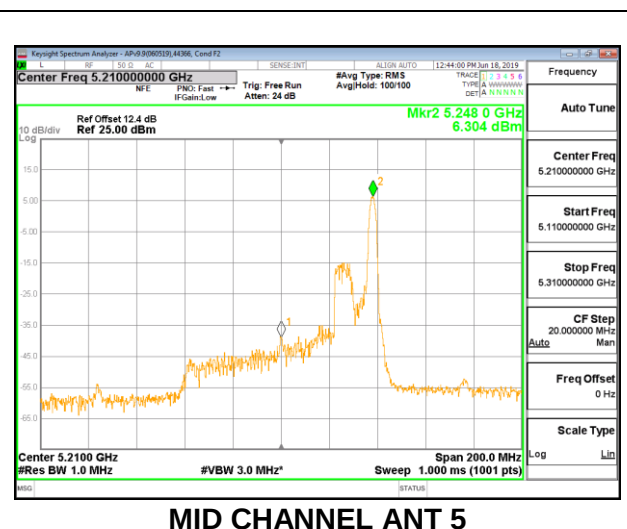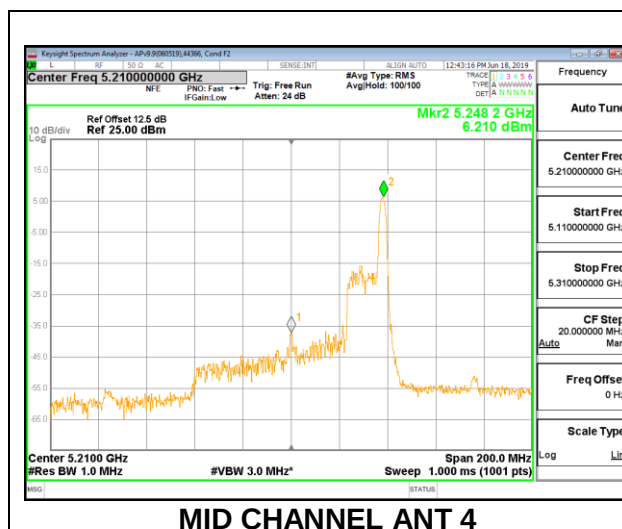

8.5.7. 802.11n HT20 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE (FCC)****Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.950	-5.80	24.00	11.00
Mid	5300	21.800	-5.80	24.00	11.00
High	5320	22.000	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.630	20.630	24.00	-3.37
Mid	5300	20.610	20.610	24.00	-3.39
High	5320	18.670	18.670	24.00	-5.33

PSD Results


Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	10.725	10.725	11.00	-0.28
Mid	5300	10.682	10.682	11.00	-0.32
High	5320	9.056	9.056	11.00	-1.94

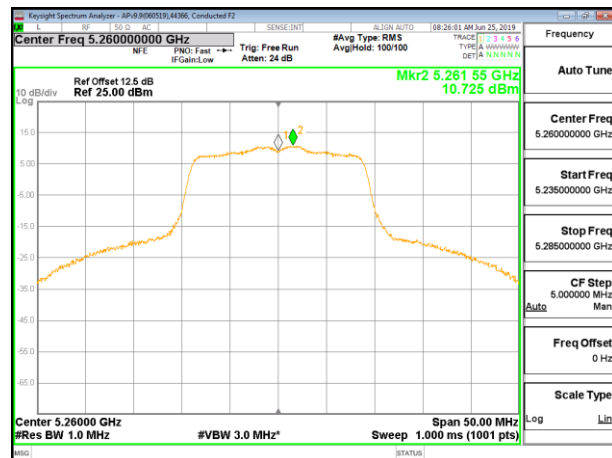

LOW CHANNEL

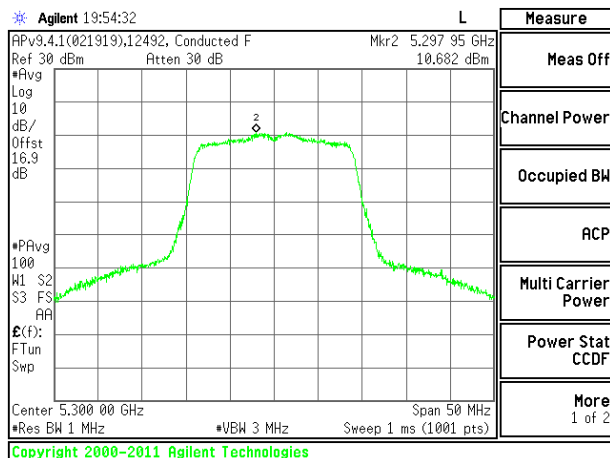

MID CHANNEL

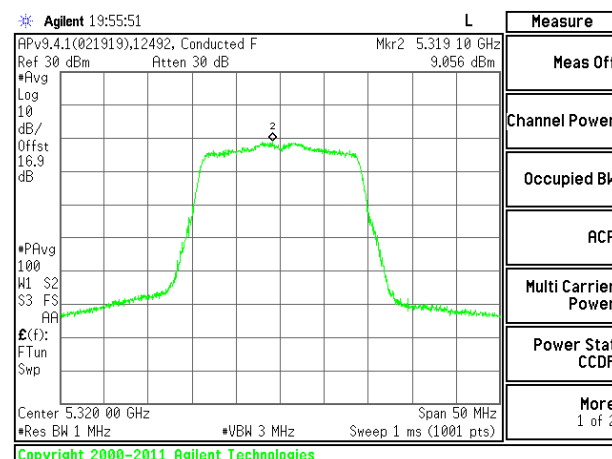

HIGH CHANNEL

1TX Antenna 5 MODE (FCC)**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.100	-1.30	24.00	11.00
Mid	5300	22.050	-1.30	24.00	11.00
High	5320	22.200	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.660	20.660	24.00	-3.34
Mid	5300	20.700	20.700	24.00	-3.30
High	5320	18.620	18.620	24.00	-5.38

PSD Results


Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	10.785	10.785	11.00	-0.22
Mid	5300	10.792	10.792	11.00	-0.21
High	5320	8.744	8.744	11.00	-2.26

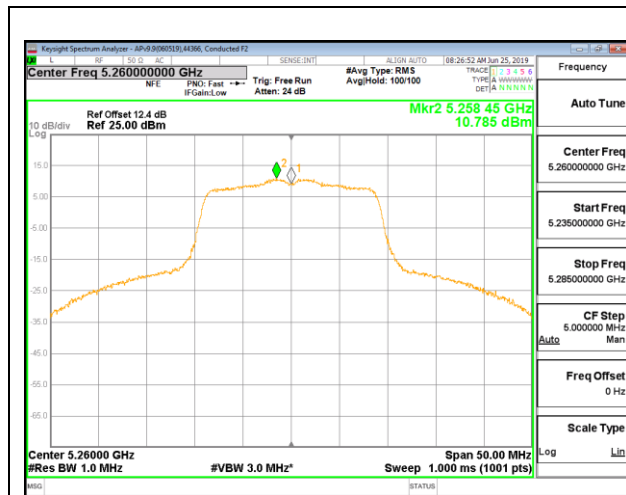

LOW CHANNEL

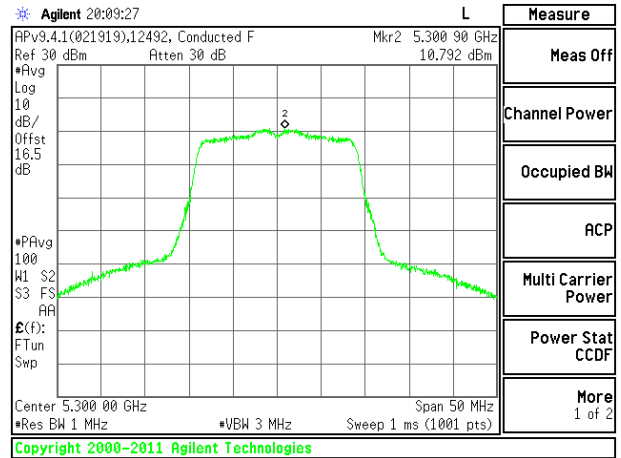

MID CHANNEL

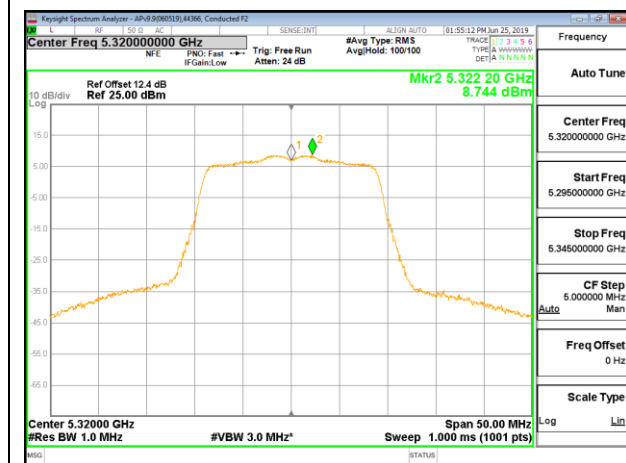

HIGH CHANNEL

2TX Antenna 4 + Antenna 5 CDD MODE (FCC)**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.800	-2.99	-0.25	24.00	11.00
Mid	5300	21.650	-2.99	-0.25	24.00	11.00
High	5320	21.700	-2.99	-0.25	24.00	11.00




Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	17.730	17.650	20.700	24.00	-3.30
Mid	5300	17.690	17.700	20.705	24.00	-3.29
High	5320	17.630	17.610	20.630	24.00	-3.37

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	7.998	7.548	10.789	11.00	-0.21
Mid	5300	7.859	7.956	10.918	11.00	-0.08
High	5320	7.062	6.827	9.956	11.00	-1.04

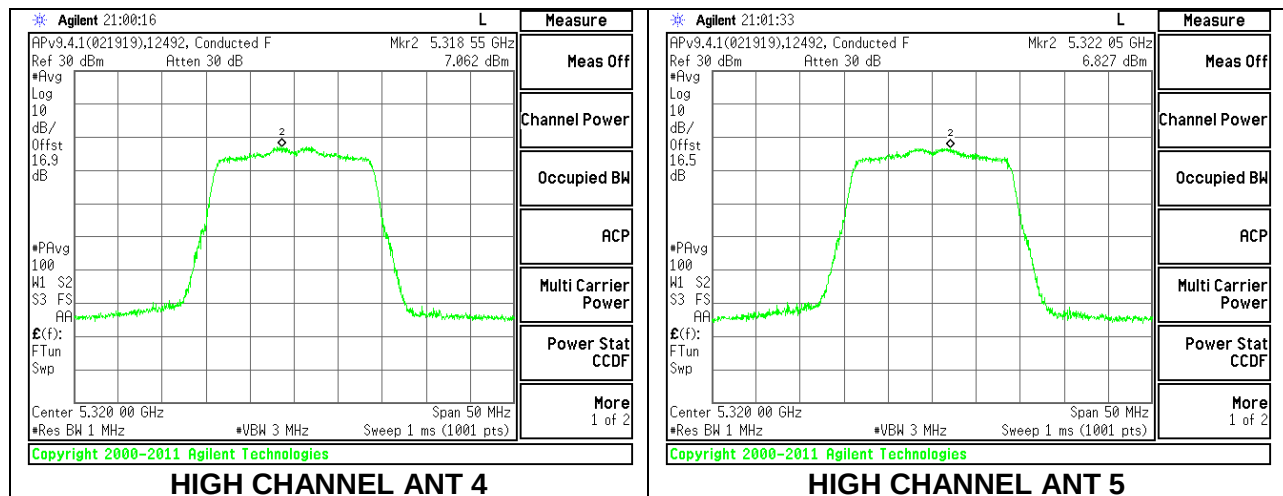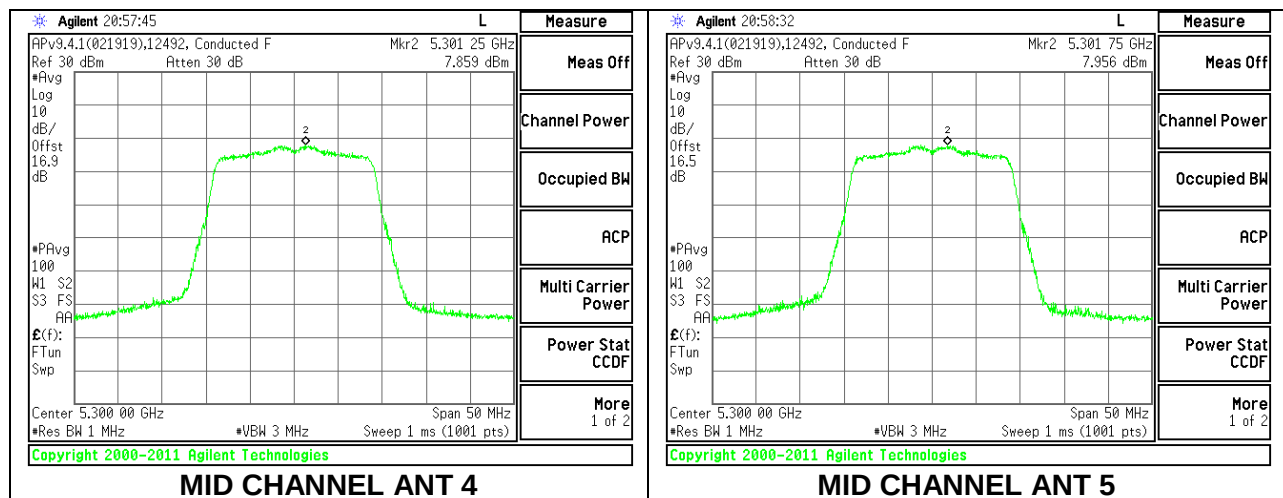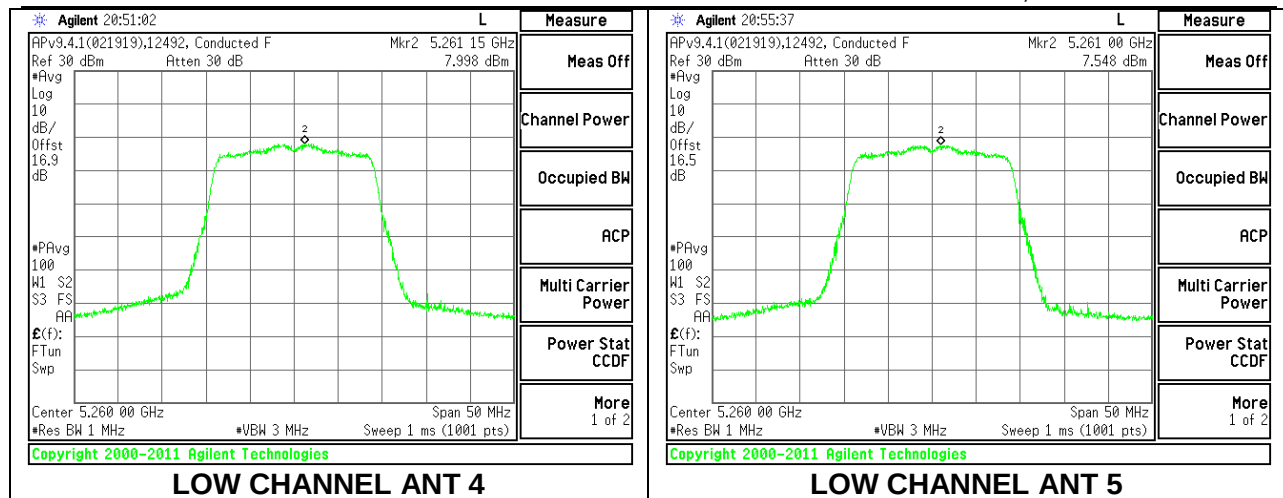

8.5.8. 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX Antenna 4 MODE (FCC)

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	40.900	-5.80	24.00	11.00
High	5310	40.700	-5.80	24.00	11.00

Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	20.910	20.910	24.00	-3.09
High	5310	17.170	17.170	24.00	-6.83

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	8.571	8.661	11.00	-2.34
High	5310	4.350	4.440	11.00	-6.56

Note: Low Ch. PSD tested at higher power.

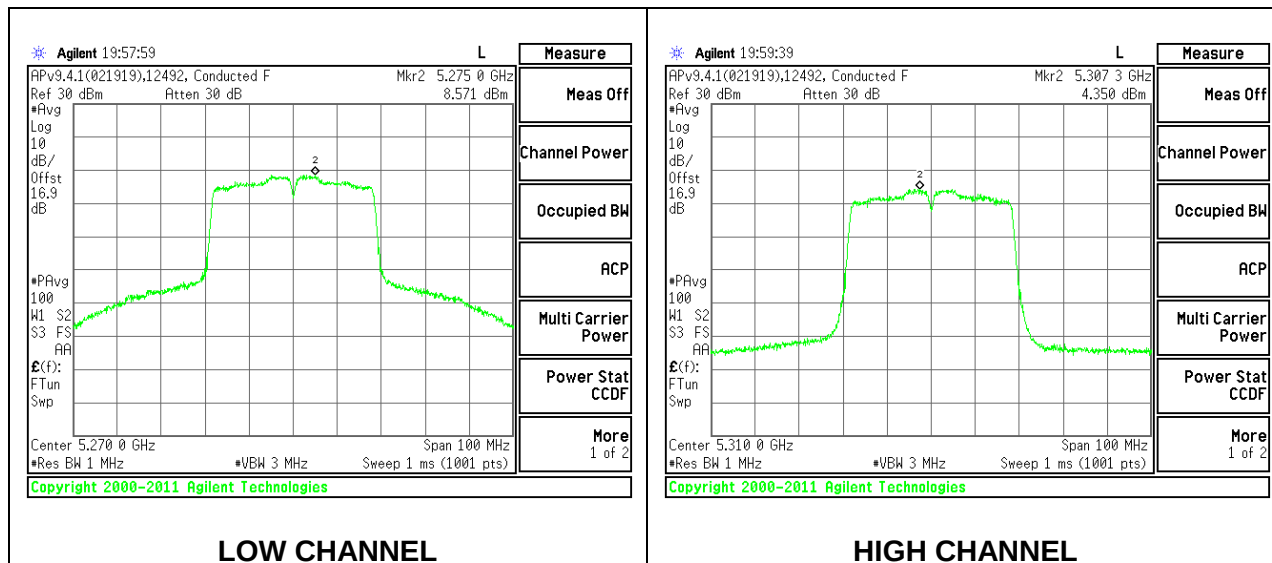

1TX Antenna 5 MODE (FCC)**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	40.900	-1.30	24.00	11.00
High	5310	41.000	-1.30	24.00	11.00

Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	21.100	21.100	24.00	-2.90
High	5310	17.200	17.200	24.00	-6.80

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	8.951	9.041	11.00	-1.96
High	5310	4.180	4.270	11.00	-6.73

Note: Low Ch. PSD tested at higher power.

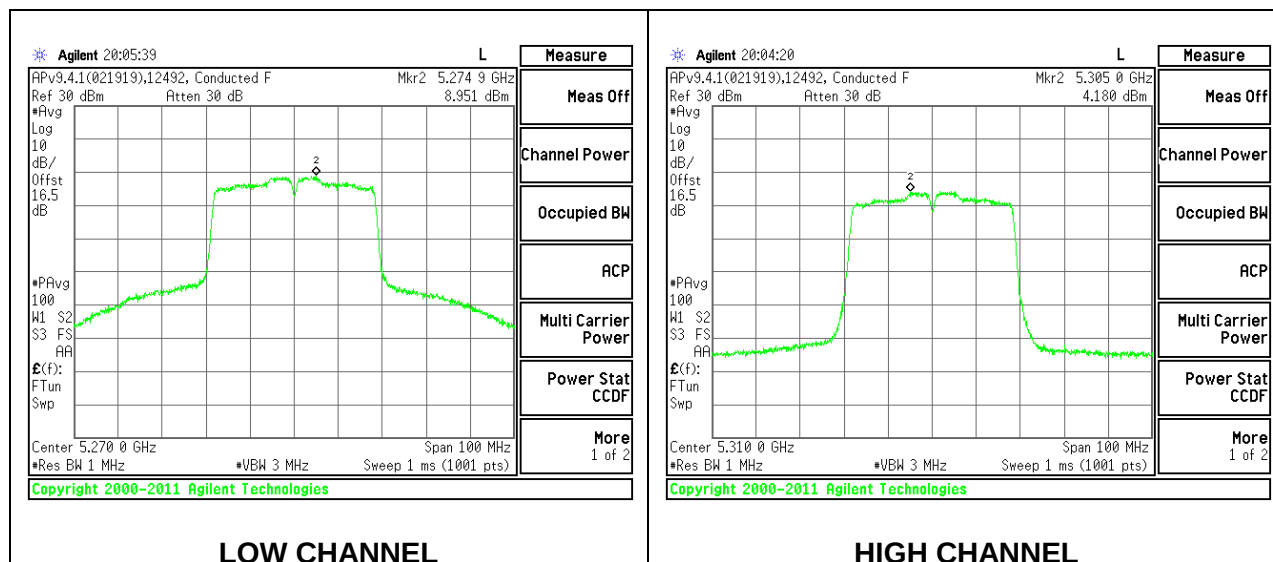

2TX Antenna 4 + Antenna 5 CDD MODE (FCC)**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	41.000	-2.99	-0.25	24.00	11.00
High	5310	40.700	-2.99	-0.25	24.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	19.690	19.710	22.710	24.00	-1.29
High	5310	16.700	16.640	19.680	24.00	-4.32

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.787	7.029	9.920	11.00	-1.08
High	5310	3.789	3.716	6.763	11.00	-4.24

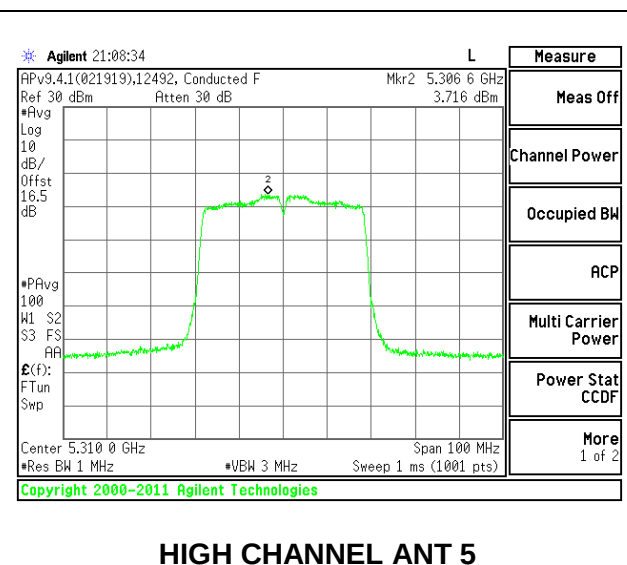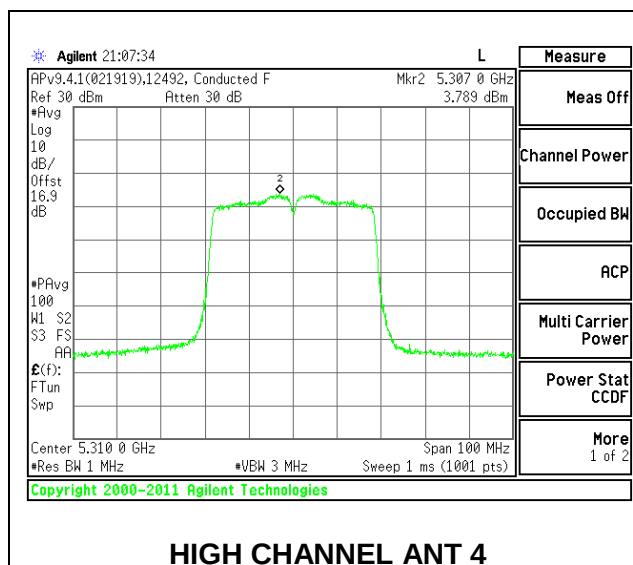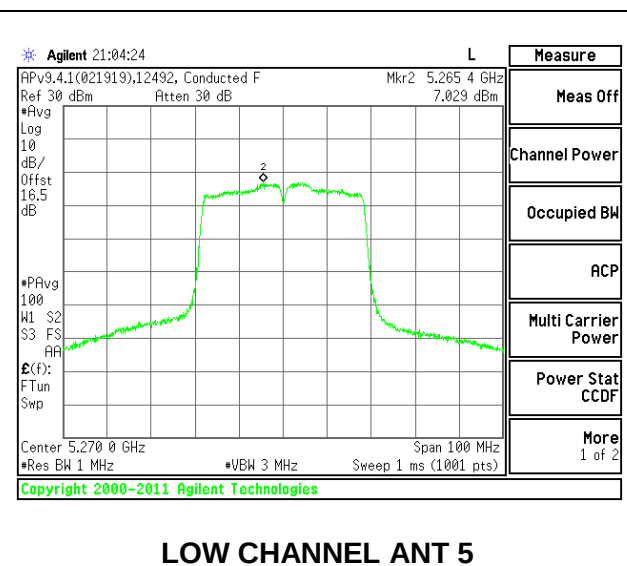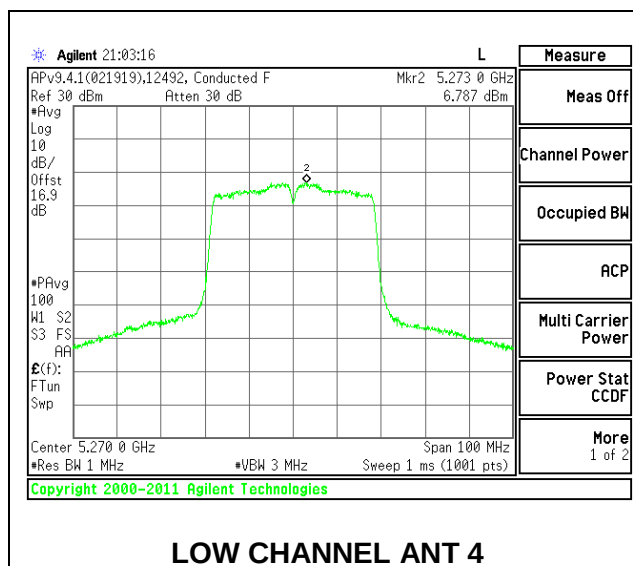

8.5.9. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE (FCC)****Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	83.800	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	17.170	17.170	24.00	-6.83

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	1.140	1.330	11.00	-9.67

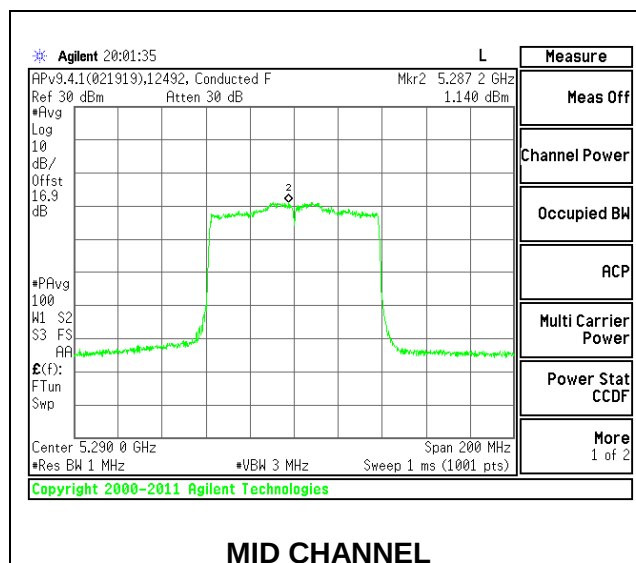

1TX Antenna 5 MODE (FCC)**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	83.600	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	17.240	17.240	24.00	-6.76

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	1.247	1.437	11.00	-9.56

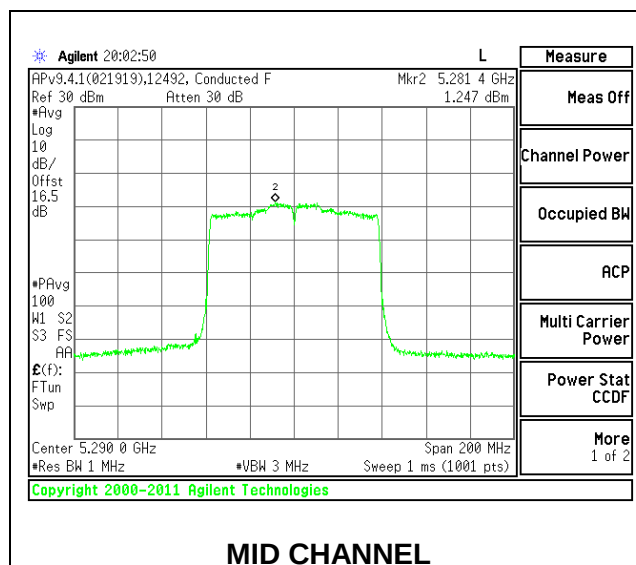

2TX Antenna 4 + Antenna 5 CDD MODE (FCC)**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	84.200	-2.99	-0.25	24.00	11.00


Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	16.220	16.230	19.235	24.00	-4.76

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	0.109	0.199	3.345	11.00	-7.66

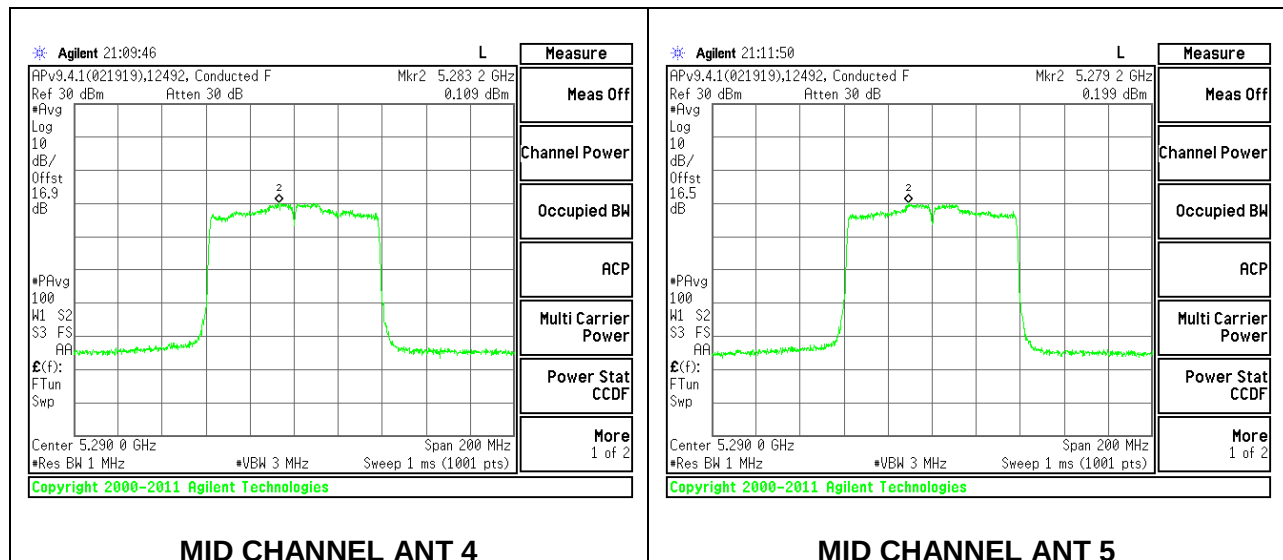

8.5.10. 802.11ax HE20 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE (FCC) – 242 Tones, RU Index 61****Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.900	-5.80	24.00	11.00
Mid	5300	21.950	-5.80	24.00	11.00
High	5320	22.000	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.710	20.710	24.00	-3.29
Mid	5300	20.730	20.730	24.00	-3.27
High	5320	17.690	17.690	24.00	-6.31

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	10.492	10.492	11.00	-0.51
Mid	5300	10.573	10.573	11.00	-0.43
High	5320	7.767	7.767	11.00	-3.23

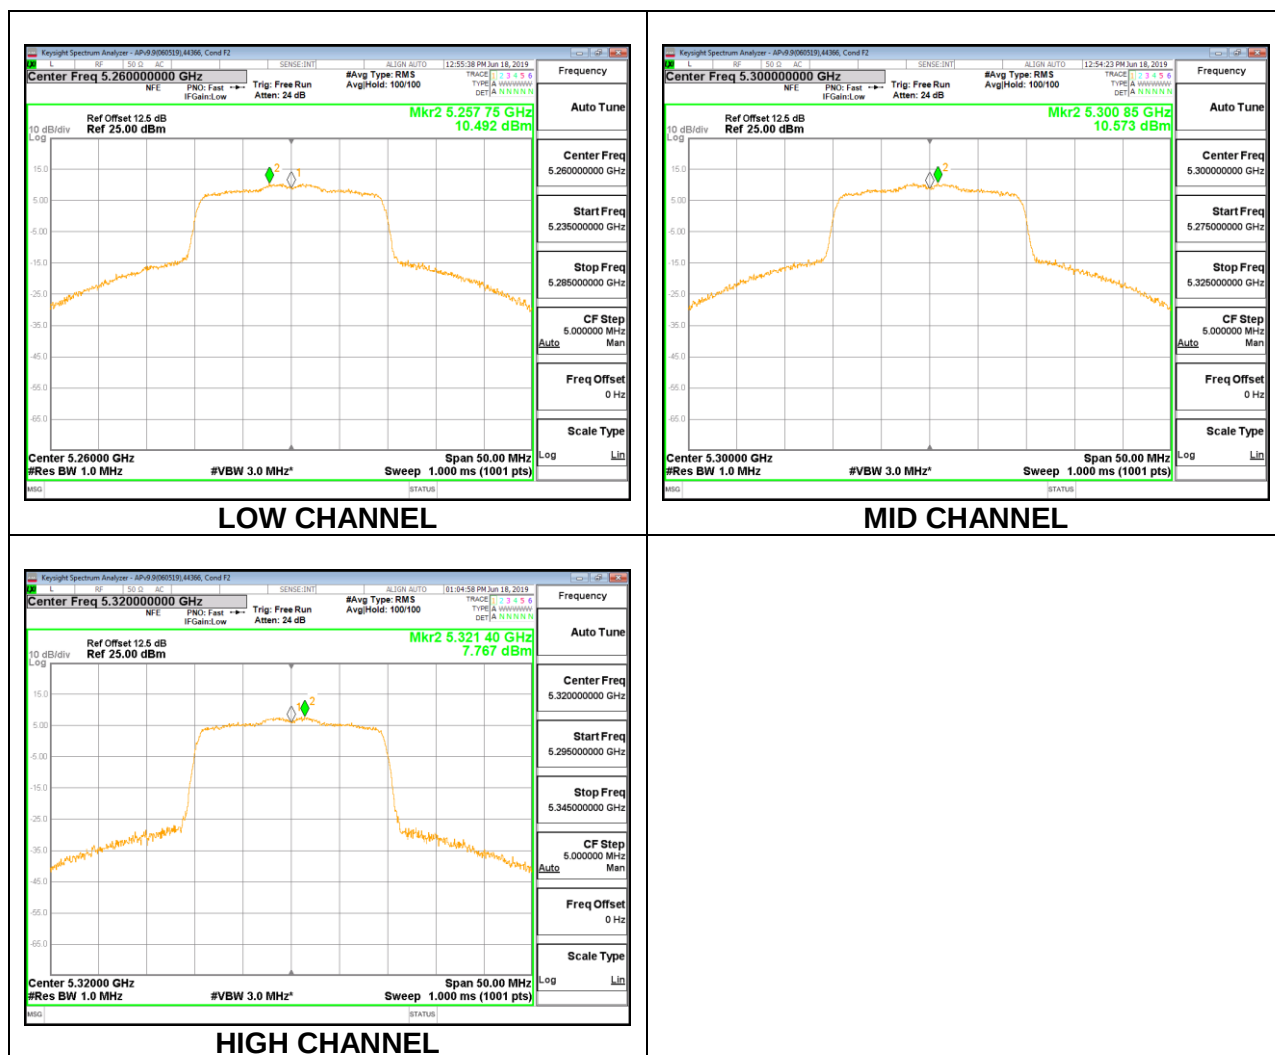

1TX Antenna 4 MODE (FCC) – 26 Tones, RU Index 0**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	20.950	-5.80	24.00	11.00
Mid	5300	20.700	-5.80	24.00	11.00
High	5320	20.450	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.710	11.710	24.00	-12.29
Mid	5300	11.700	11.700	24.00	-12.30
High	5320	11.730	11.730	24.00	-12.27

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	9.603	9.603	11.00	-1.40
Mid	5300	9.518	9.518	11.00	-1.48
High	5320	9.729	9.729	11.00	-1.27

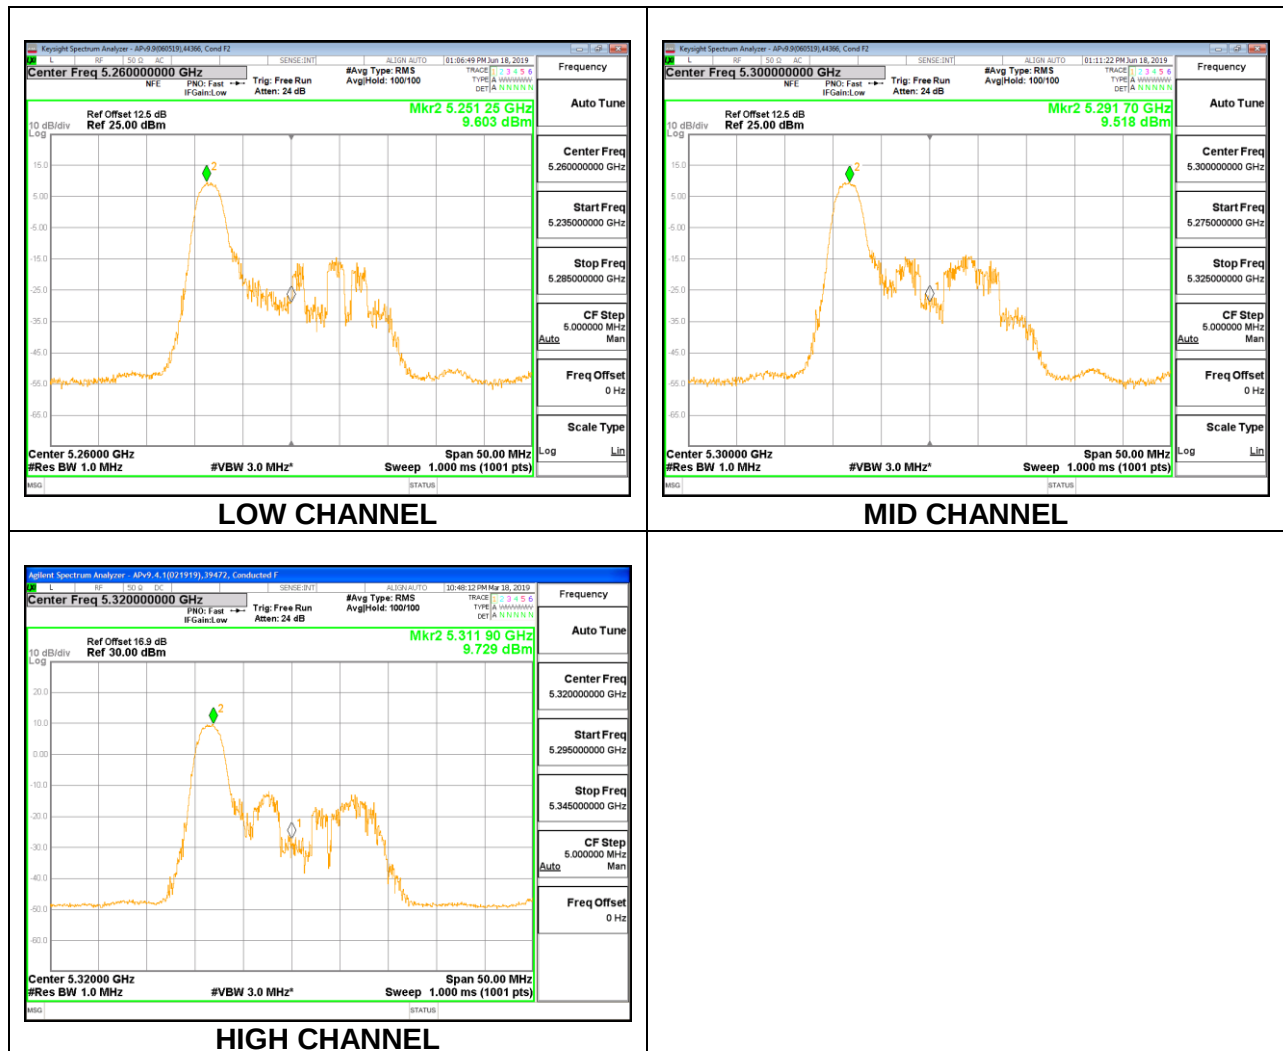

1TX Antenna 4 MODE (FCC) – 26 Tones, RU Index 4**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	19.550	-5.80	23.91	11.00
Mid	5300	19.900	-5.80	23.99	11.00
High	5320	19.800	-5.80	23.97	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.700	11.700	23.91	-12.21
Mid	5300	11.650	11.650	23.99	-12.34
High	5320	11.570	11.570	23.97	-12.40

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	8.827	8.827	11.00	-2.17
Mid	5300	8.639	8.639	11.00	-2.36
High	5320	8.705	8.705	11.00	-2.30

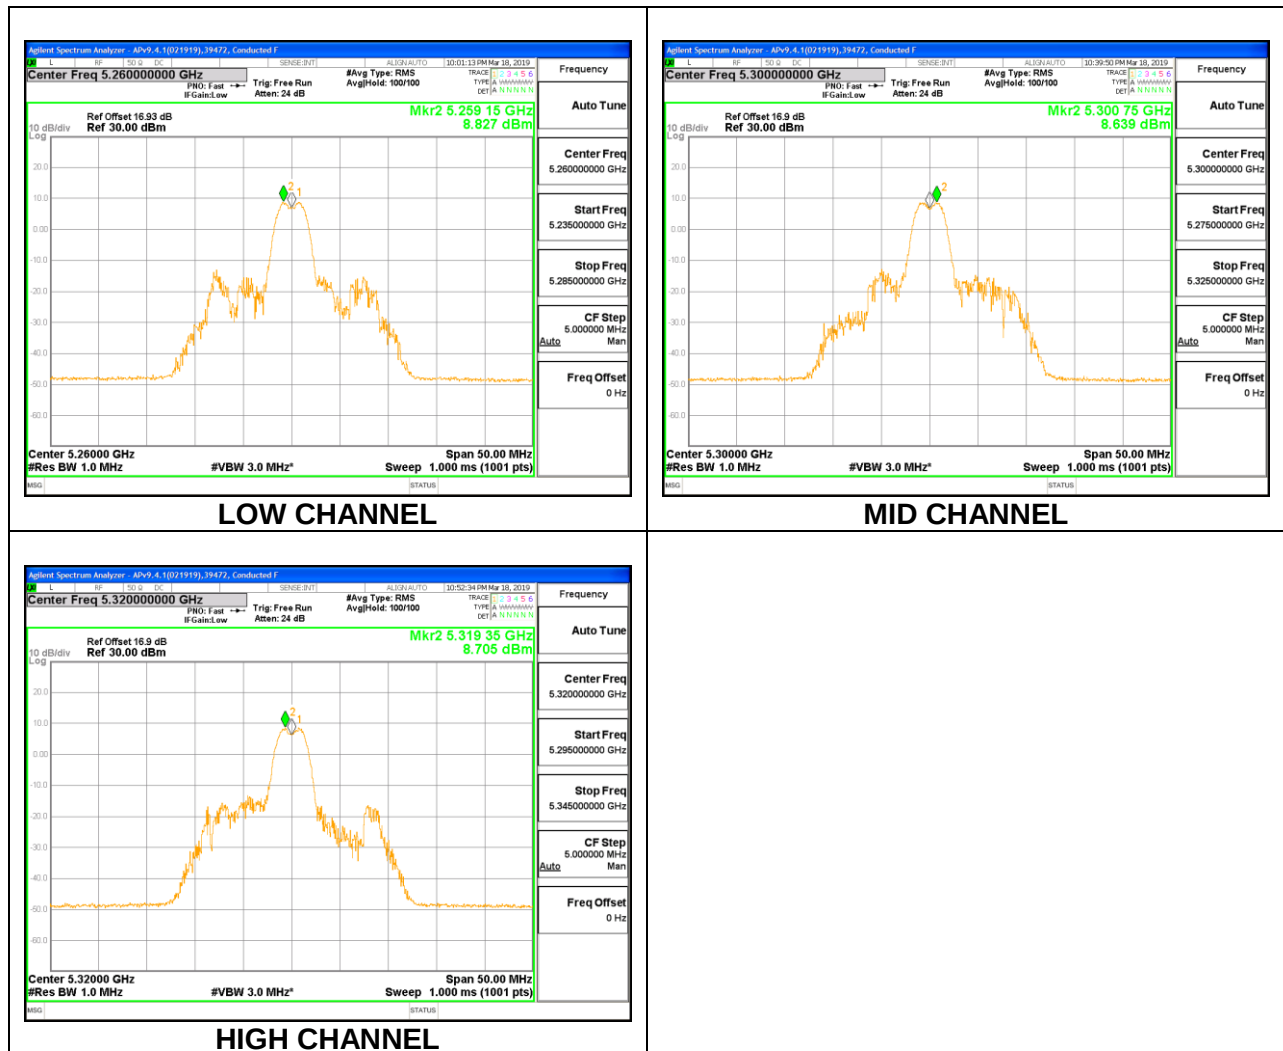

1TX Antenna 4 MODE (FCC) – 26 Tones, RU Index 8**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	20.900	-5.80	24.00	11.00
Mid	5300	21.150	-5.80	24.00	11.00
High	5320	21.050	-5.80	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.680	11.680	24.00	-12.32
Mid	5300	11.690	11.690	24.00	-12.31
High	5320	11.690	11.690	24.00	-12.31

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	9.957	9.957	11.00	-1.04
Mid	5300	9.738	9.738	11.00	-1.26
High	5320	9.762	9.762	11.00	-1.24



1TX Antenna 5 MODE (FCC) – 242 Tones, RU Index 61**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.950	-1.30	24.00	11.00
Mid	5300	21.900	-1.30	24.00	11.00
High	5320	22.000	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.720	20.720	24.00	-3.28
Mid	5300	20.710	20.710	24.00	-3.29
High	5320	17.700	17.700	24.00	-6.30

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	10.899	10.899	11.00	-0.10
Mid	5300	10.838	10.838	11.00	-0.16
High	5320	7.421	7.421	11.00	-3.58

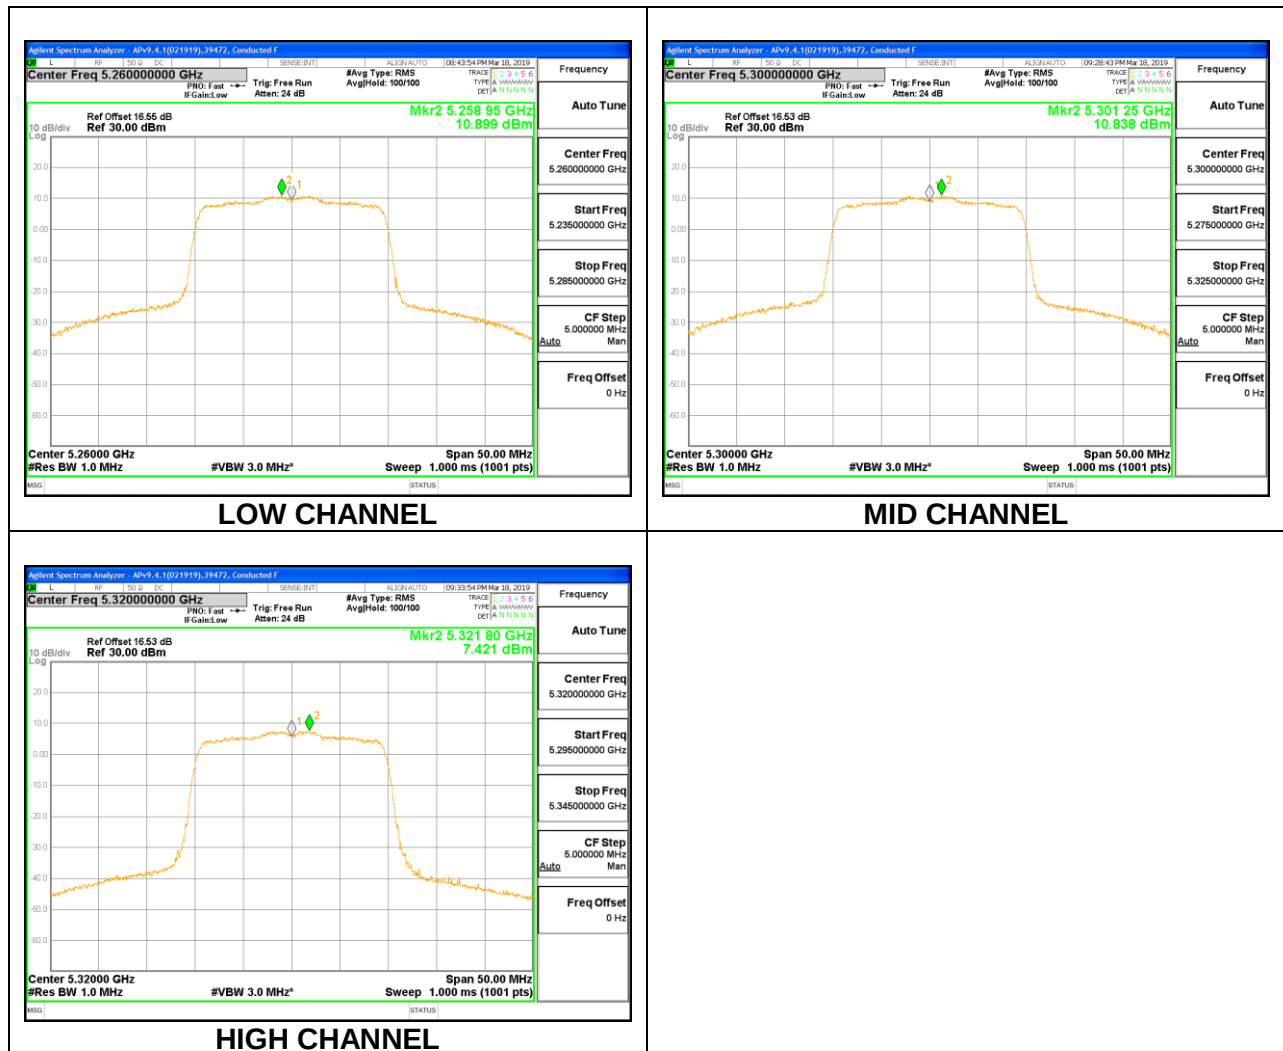

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 0**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	20.600	-1.30	24.00	11.00
Mid	5300	20.650	-1.30	24.00	11.00
High	5320	20.450	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.690	11.690	24.00	-12.31
Mid	5300	11.670	11.670	24.00	-12.33
High	5320	11.630	11.630	24.00	-12.37

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	9.934	9.934	11.00	-1.07
Mid	5300	9.826	9.826	11.00	-1.17
High	5320	9.496	9.496	11.00	-1.50

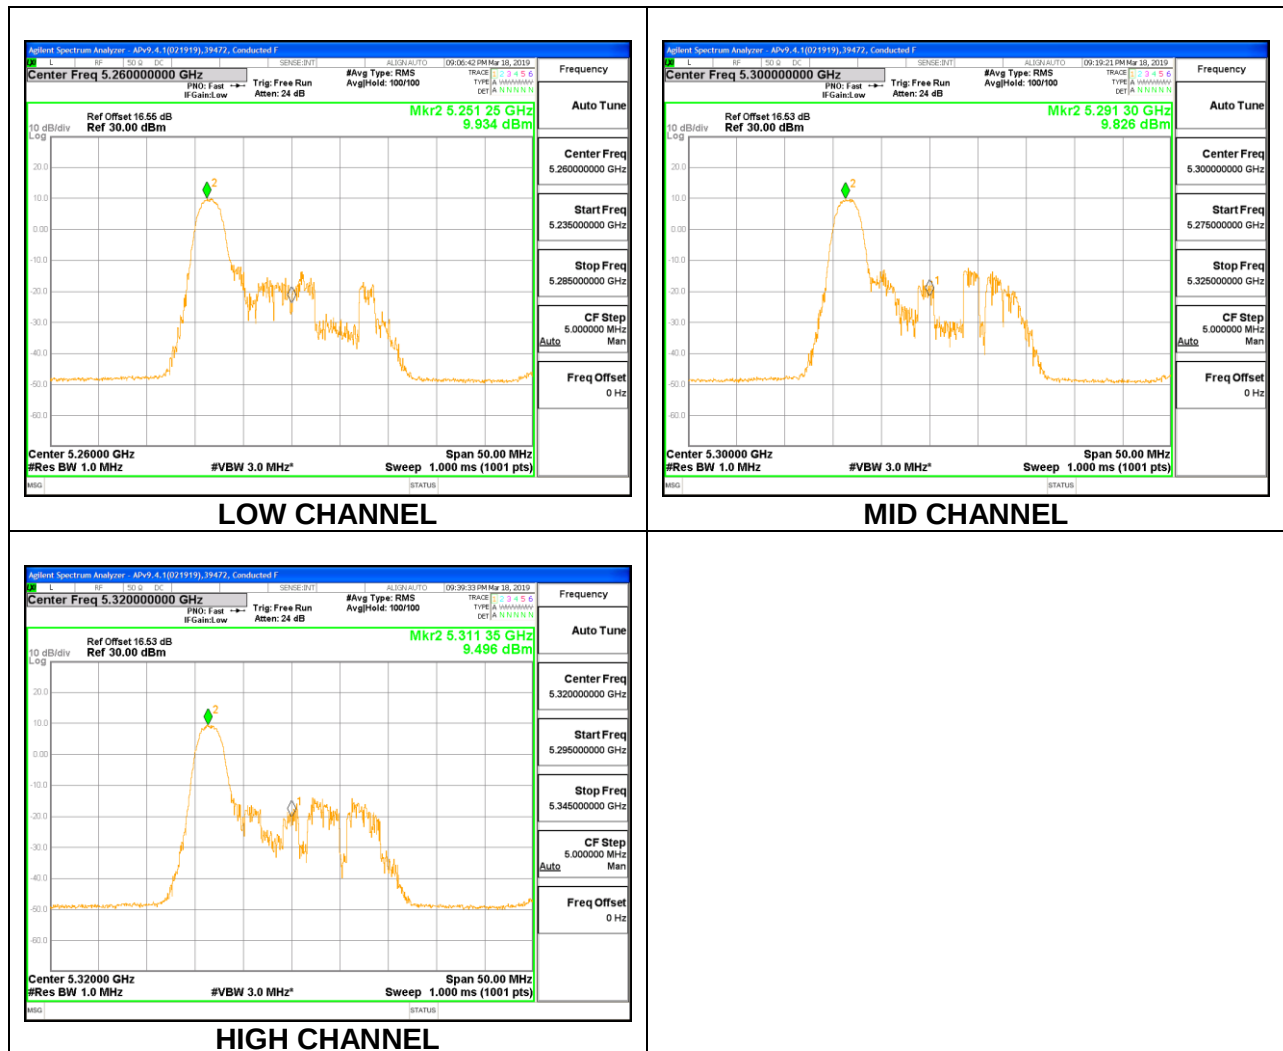

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 4**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	19.800	-1.30	23.97	11.00
Mid	5300	19.750	-1.30	23.96	11.00
High	5320	19.900	-1.30	23.99	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.700	11.700	23.97	-12.27
Mid	5300	11.670	11.670	23.96	-12.29
High	5320	11.670	11.670	23.99	-12.32

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	8.867	8.867	11.00	-2.13
Mid	5300	8.602	8.602	11.00	-2.40
High	5320	8.610	8.610	11.00	-2.39

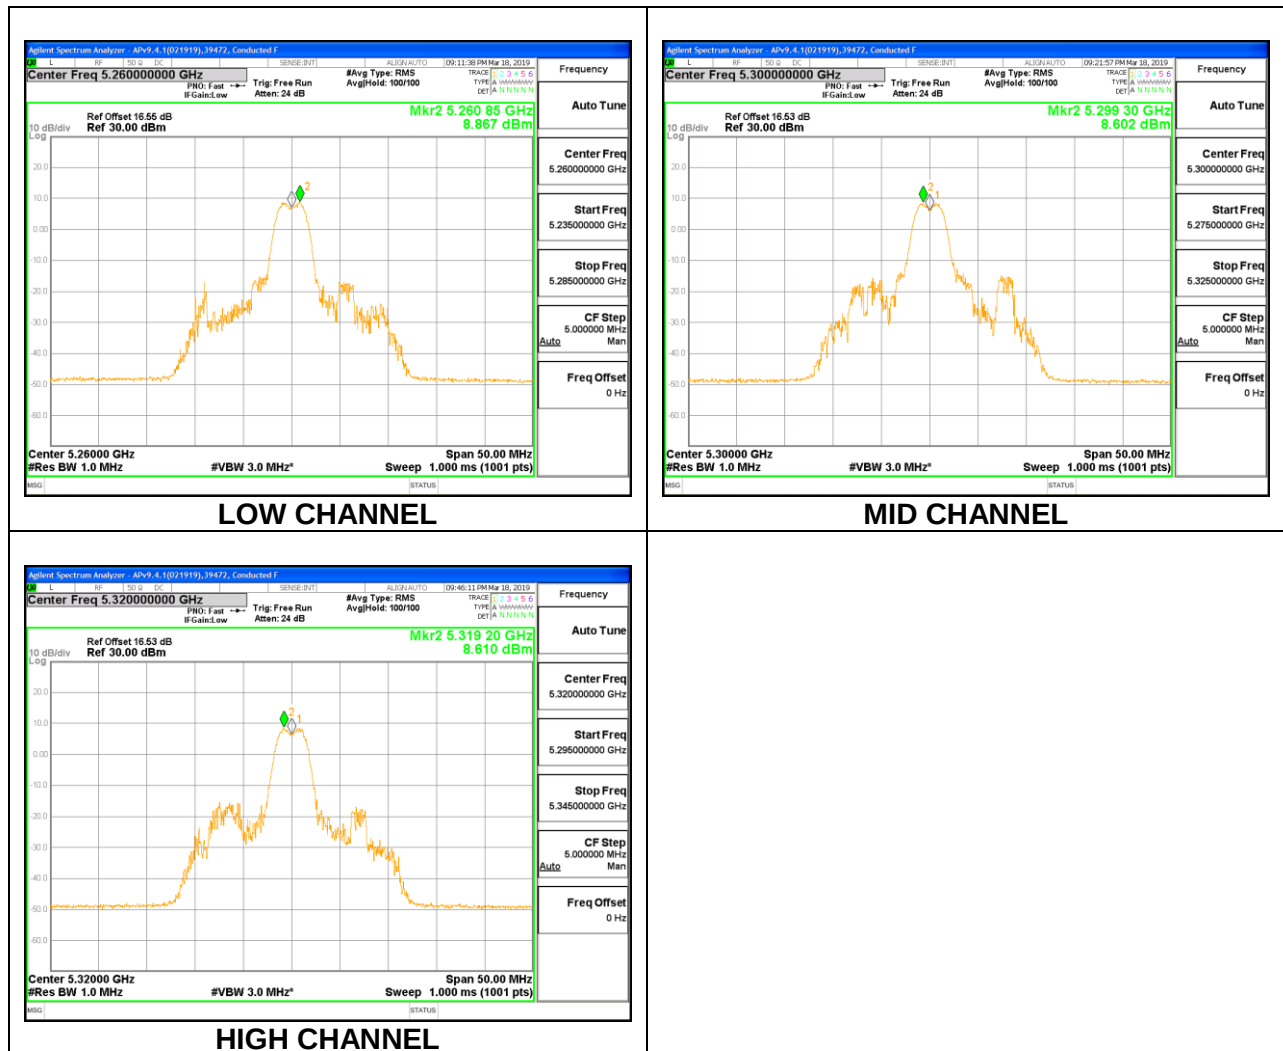

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 8**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	20.900	-1.30	24.00	11.00
Mid	5300	21.250	-1.30	24.00	11.00
High	5320	21.200	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.690	11.690	24.00	-12.31
Mid	5300	11.660	11.660	24.00	-12.34
High	5320	11.640	11.640	24.00	-12.36

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	9.672	9.672	11.00	-1.33
Mid	5300	9.403	9.403	11.00	-1.60
High	5320	9.310	9.310	11.00	-1.69

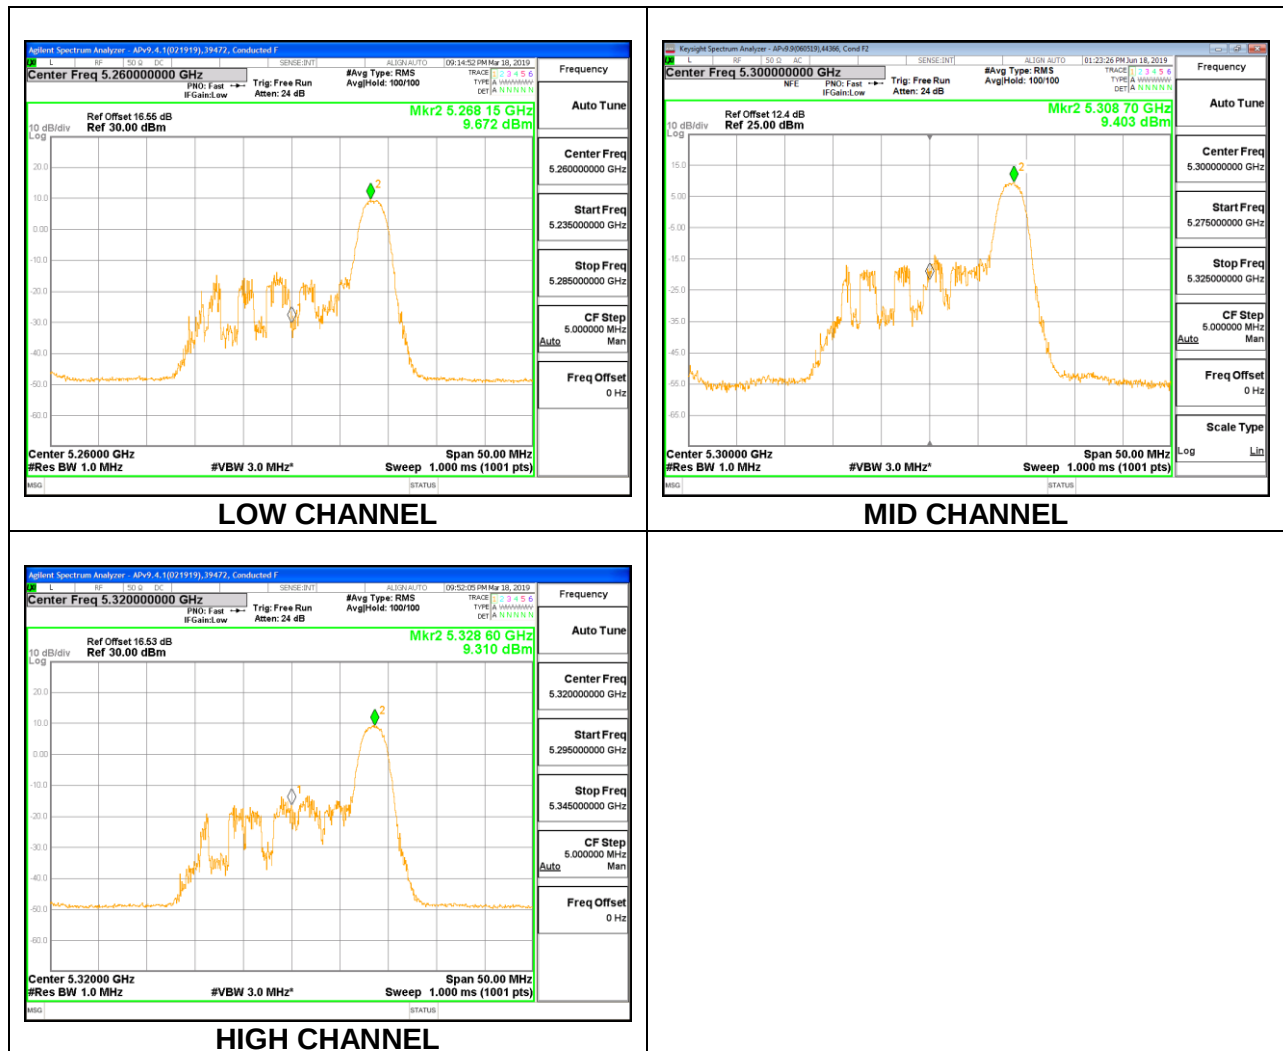

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 242 Tones, RU Index 61**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	21.700	-2.99	-0.25	24.00	11.00
Mid	5300	21.650	-2.99	-0.25	24.00	11.00
High	5320	21.700	-2.99	-0.25	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	17.690	17.660	20.685	24.00	-3.31
Mid	5300	17.710	17.690	20.710	24.00	-3.29
High	5320	16.190	16.180	19.195	24.00	-4.80


PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	7.672	7.397	10.547	11.00	-0.45
Mid	5300	7.760	7.687	10.734	11.00	-0.27
High	5320	6.042	5.979	9.021	11.00	-1.98

LOW CHANNEL

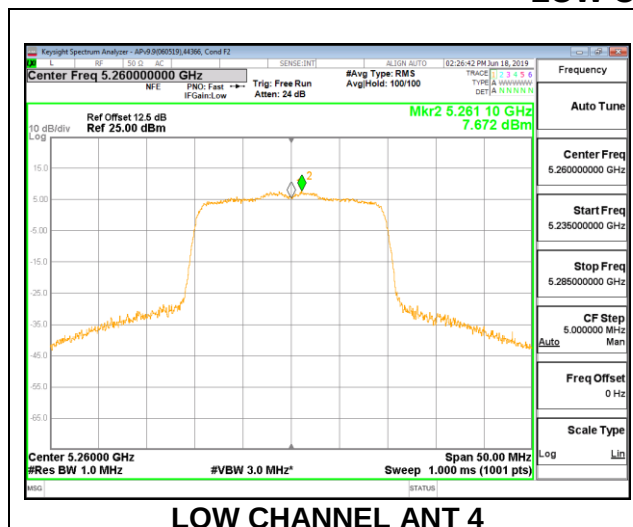


LOW CHANNEL ANT 4

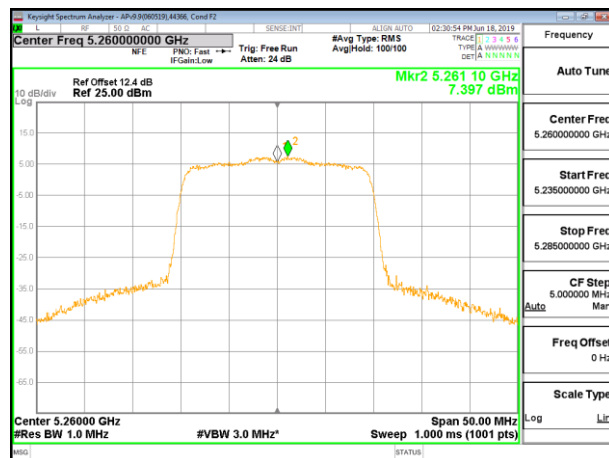


LOW CHANNEL ANT 5

MID CHANNEL

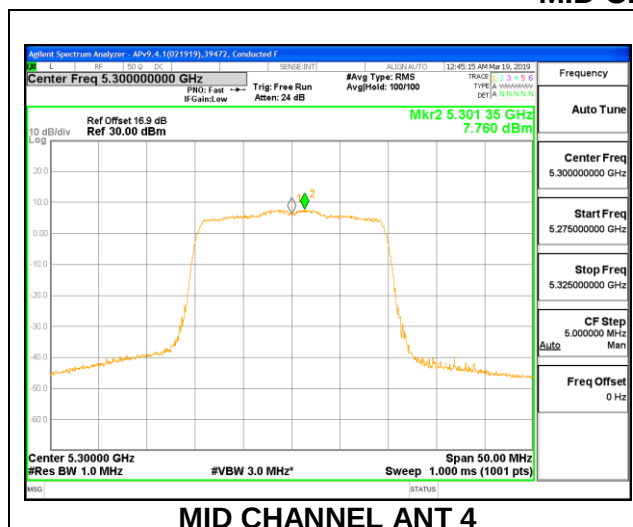


MID CHANNEL ANT 4

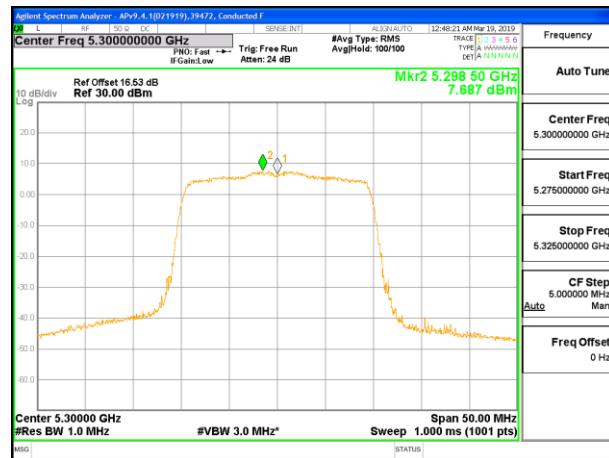


MID CHANNEL ANT 5

HIGH CHANNEL

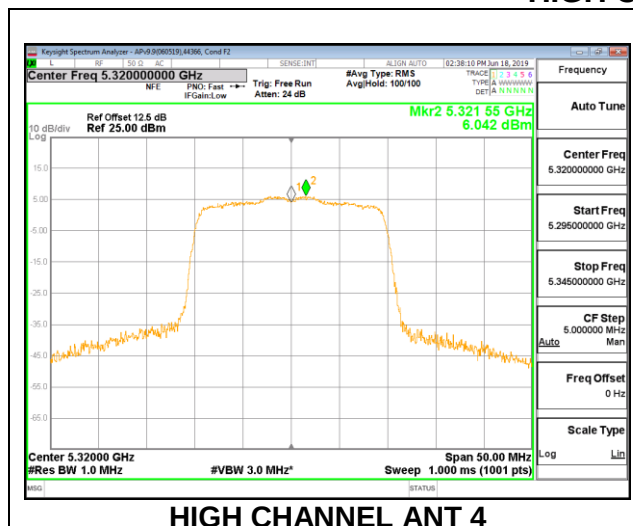

HIGH CHANNEL ANT 4

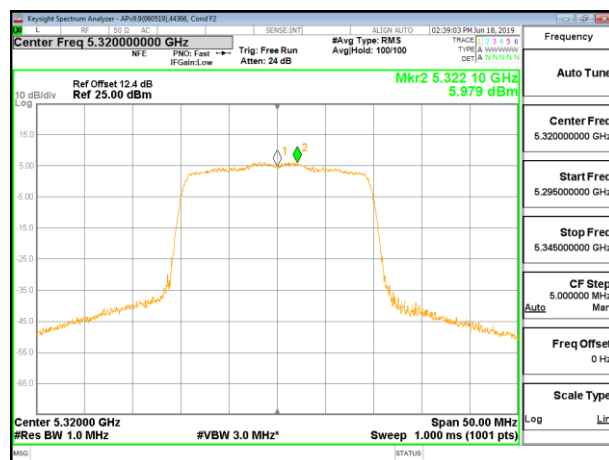

HIGH CHANNEL ANT 5

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 0**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	19.950	-2.99	-0.25	24.00	11.00
Mid	5300	19.950	-2.99	-0.25	24.00	11.00
High	5320	19.900	-2.99	-0.25	23.99	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results


Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	8.700	8.660	11.690	24.00	-12.31
Mid	5300	8.730	8.690	11.720	24.00	-12.28
High	5320	8.700	8.710	11.715	23.99	-12.27

PSD Results


Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	6.675	6.321	9.512	11.00	-1.49
Mid	5300	6.767	6.667	9.728	11.00	-1.27
High	5320	6.691	6.709	9.710	11.00	-1.29

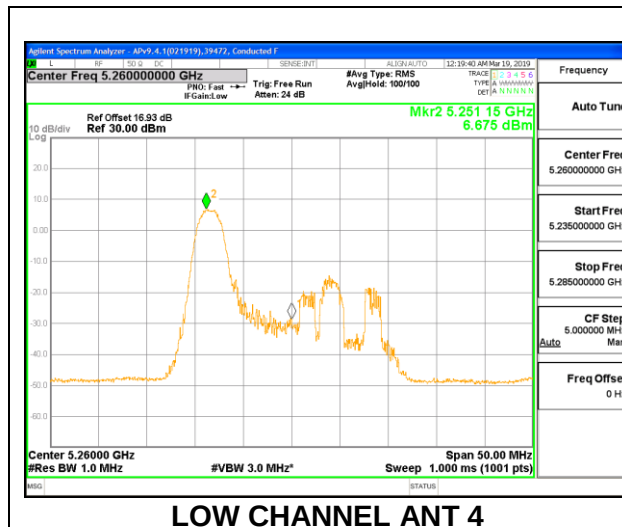


LOW CHANNEL ANT 4

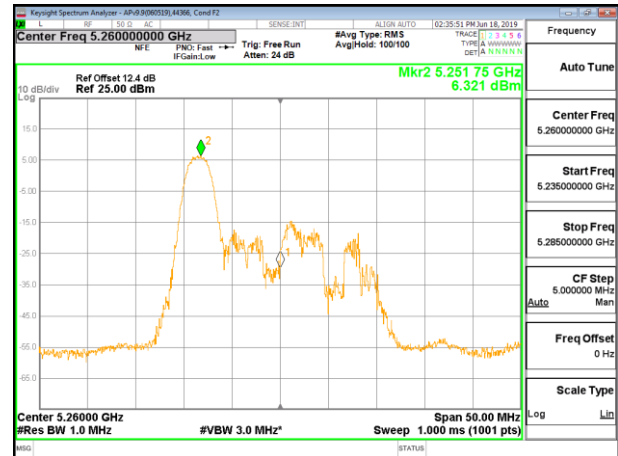


LOW CHANNEL ANT 5

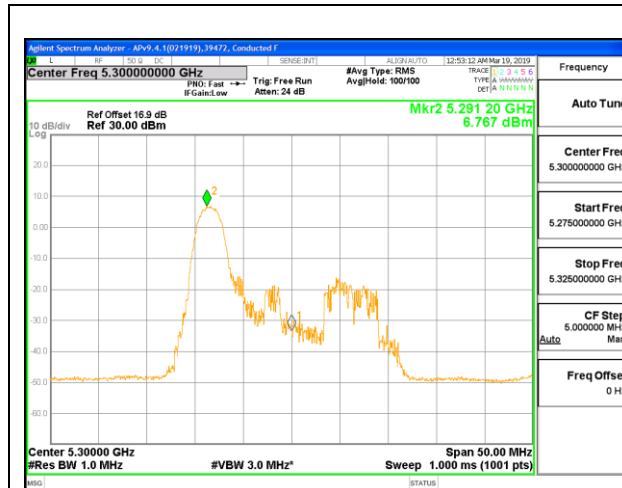


MID CHANNEL ANT 4

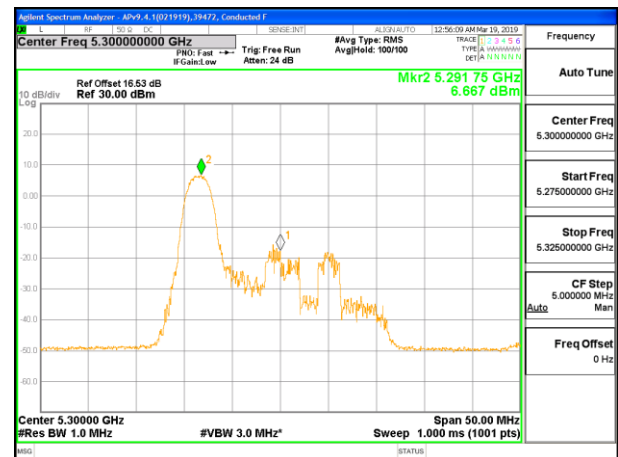

MID CHANNEL ANT 5

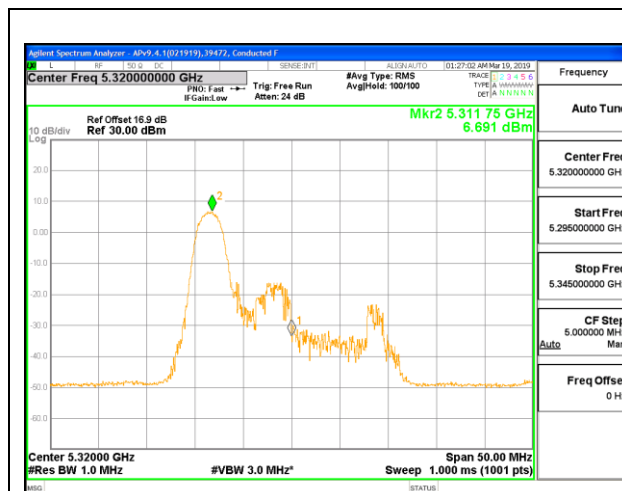

HIGH CHANNEL ANT 4

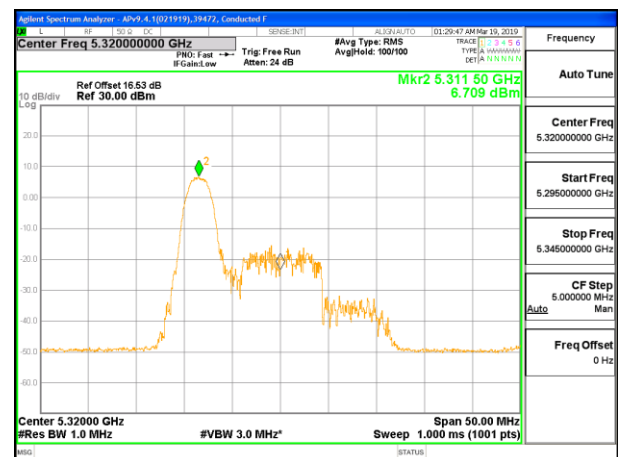

HIGH CHANNEL ANT 5

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 4**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	18.550	-2.99	-0.25	23.68	11.00
Mid	5300	18.250	-2.99	-0.25	23.61	11.00
High	5320	18.350	-2.99	-0.25	23.64	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	8.700	8.720	11.720	23.68	-11.96
Mid	5300	8.710	8.710	11.720	23.61	-11.89
High	5320	8.720	8.680	11.710	23.64	-11.93

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	5.835	5.931	8.894	11.00	-2.11
Mid	5300	5.828	5.869	8.859	11.00	-2.14
High	5320	5.918	5.714	8.827	11.00	-2.17

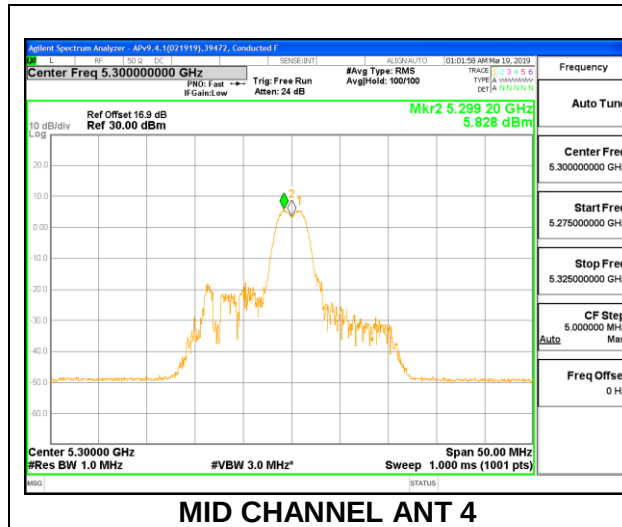

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 8**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	20.200	-2.99	-0.25	24.00	11.00
Mid	5300	20.150	-2.99	-0.25	24.00	11.00
High	5320	20.200	-2.99	-0.25	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	8.650	8.700	11.685	24.00	-12.31
Mid	5300	8.690	8.690	11.700	24.00	-12.30
High	5320	8.680	8.630	11.665	24.00	-12.33

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	6.550	6.985	9.783	11.00	-1.22
Mid	5300	6.697	6.665	9.691	11.00	-1.31
High	5320	6.631	6.420	9.537	11.00	-1.46