




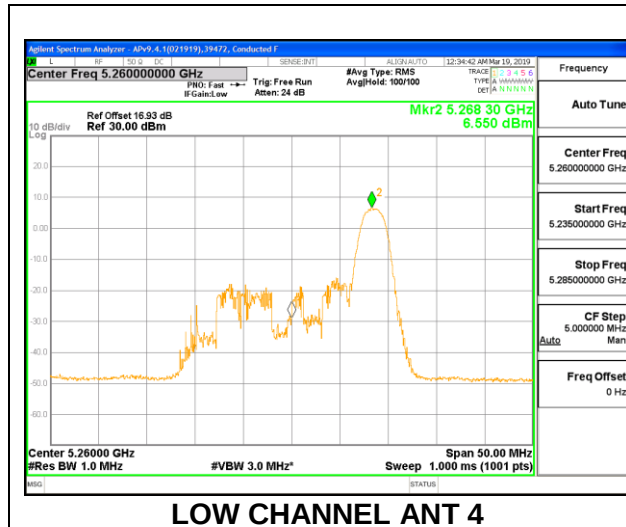


LOW CHANNEL ANT 4

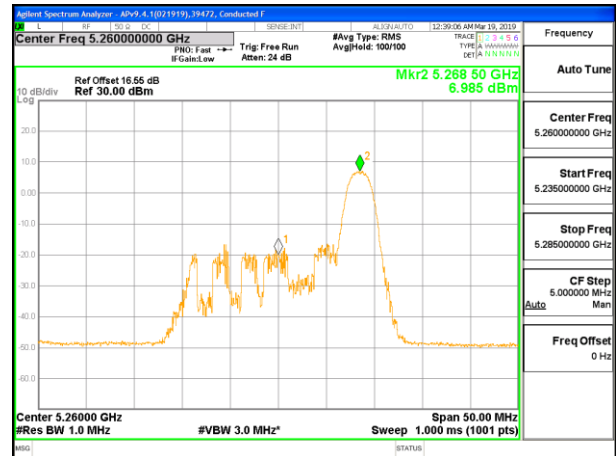


LOW CHANNEL ANT 5

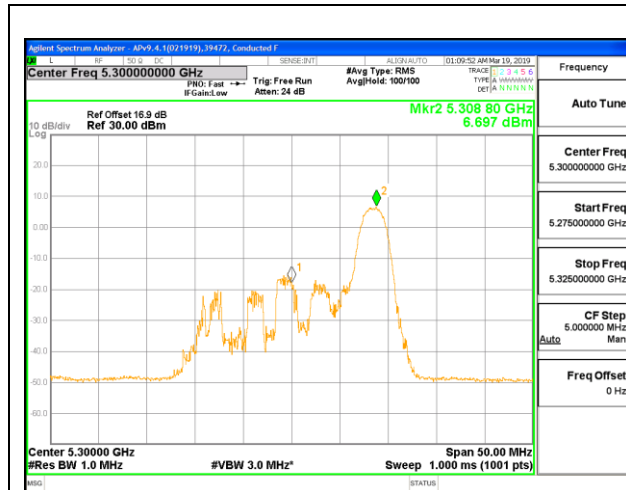


MID CHANNEL ANT 4

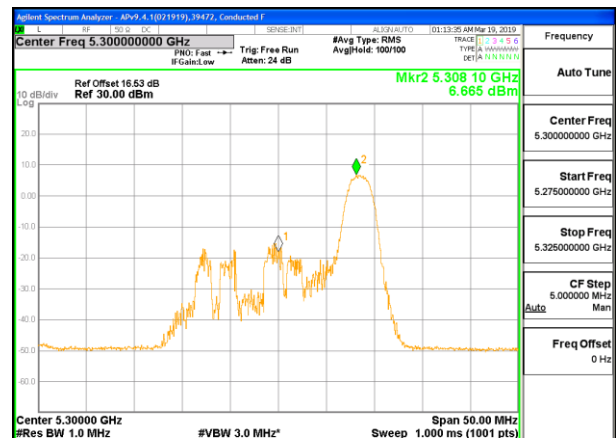

MID CHANNEL ANT 5

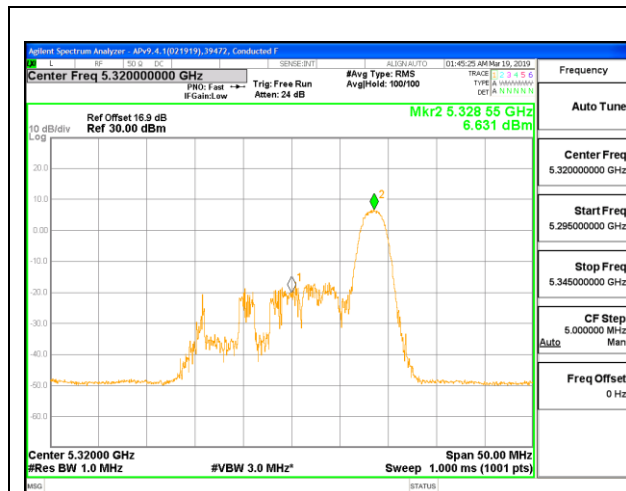

HIGH CHANNEL ANT 4

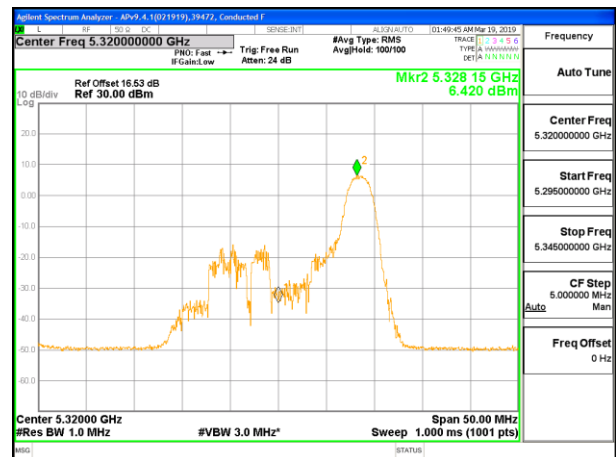

HIGH CHANNEL ANT 5

8.5.11. 802.11ax HE40 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE (FCC) – 484 Tones, RU Index 65****Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	41.900	-5.80	24.00	11.00
High	5310	40.800	-5.80	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	20.970	20.970	24.00	-3.03
High	5310	15.710	15.710	24.00	-8.29

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	8.589	8.589	11.00	-2.41
High	5310	2.946	2.946	11.00	-8.05

Note: Low Ch. PSD tested at higher power.

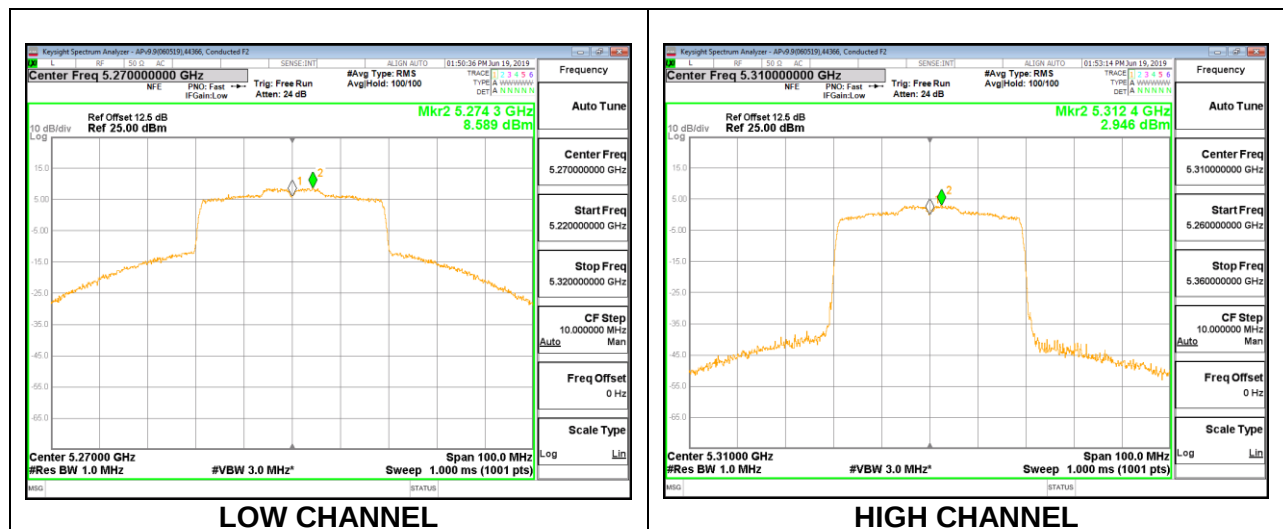

1TX Antenna 4 MODE (FCC) – 26 Tones, RU Index 0**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	21.600	-5.80	24.00	11.00
High	5310	21.100	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.710	11.710	24.00	-12.29
High	5310	11.700	11.700	24.00	-12.30

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.666	9.666	11.00	-1.33
High	5310	9.623	9.623	11.00	-1.38

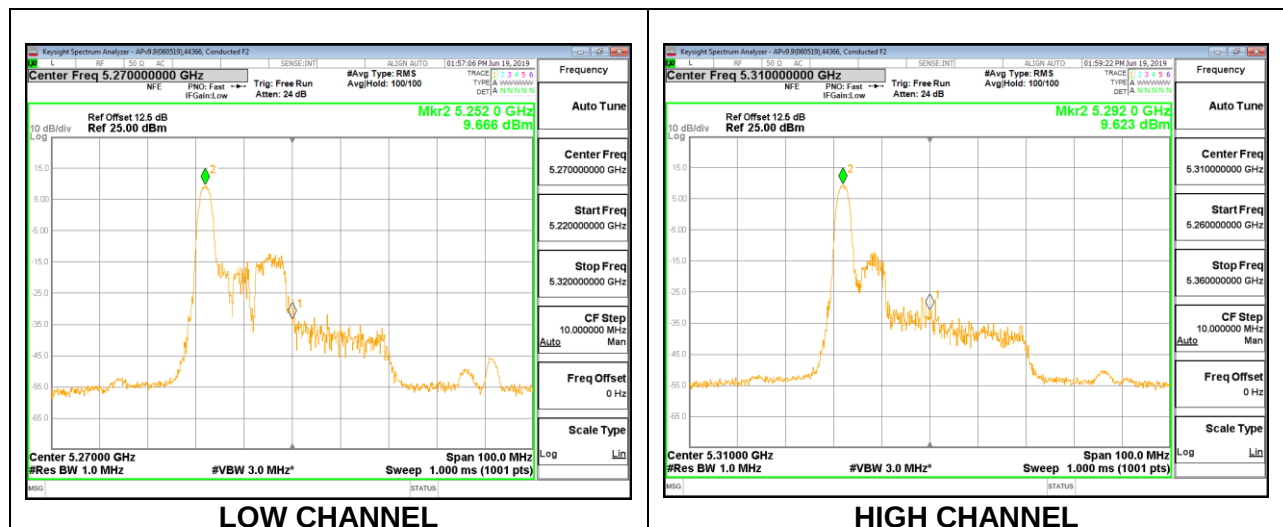

1TX Antenna 4 MODE (FCC) – 26 Tones, RU Index 8**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	25.000	-5.80	24.00	11.00
High	5310	25.600	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.710	11.710	24.00	-12.29
High	5310	11.720	11.720	24.00	-12.28

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.677	9.677	11.00	-1.32
High	5310	9.718	9.718	11.00	-1.28

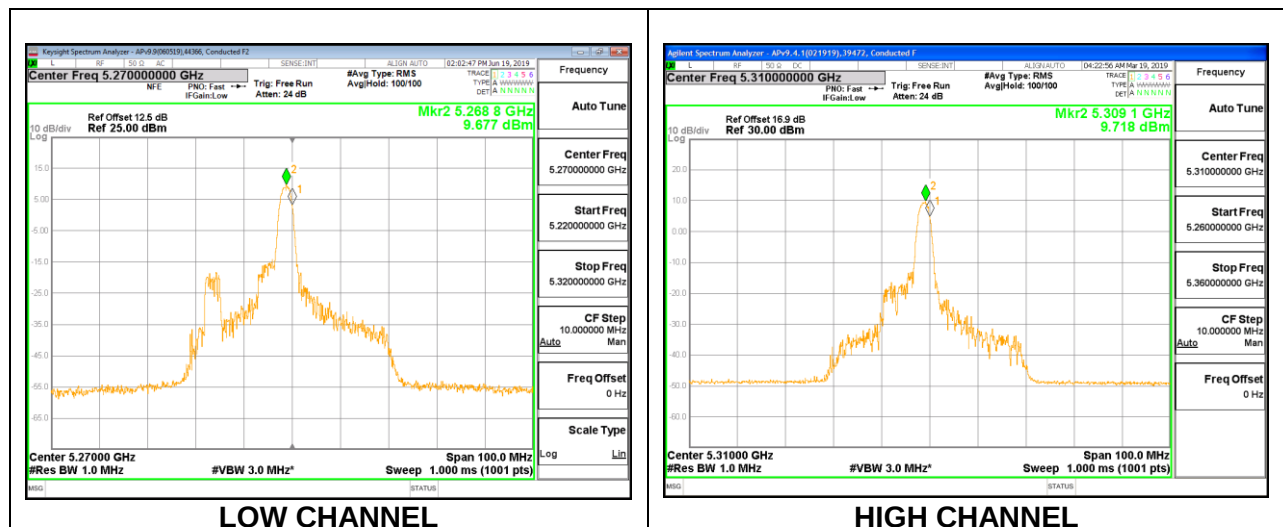

1TX Antenna 4 MODE (FCC) – 26 Tones, RU Index 17**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	21.600	-5.80	24.00	11.00
High	5310	22.400	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.730	11.730	24.00	-12.27
High	5310	11.720	11.720	24.00	-12.28

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.899	9.899	11.00	-1.10
High	5310	9.720	9.720	11.00	-1.28

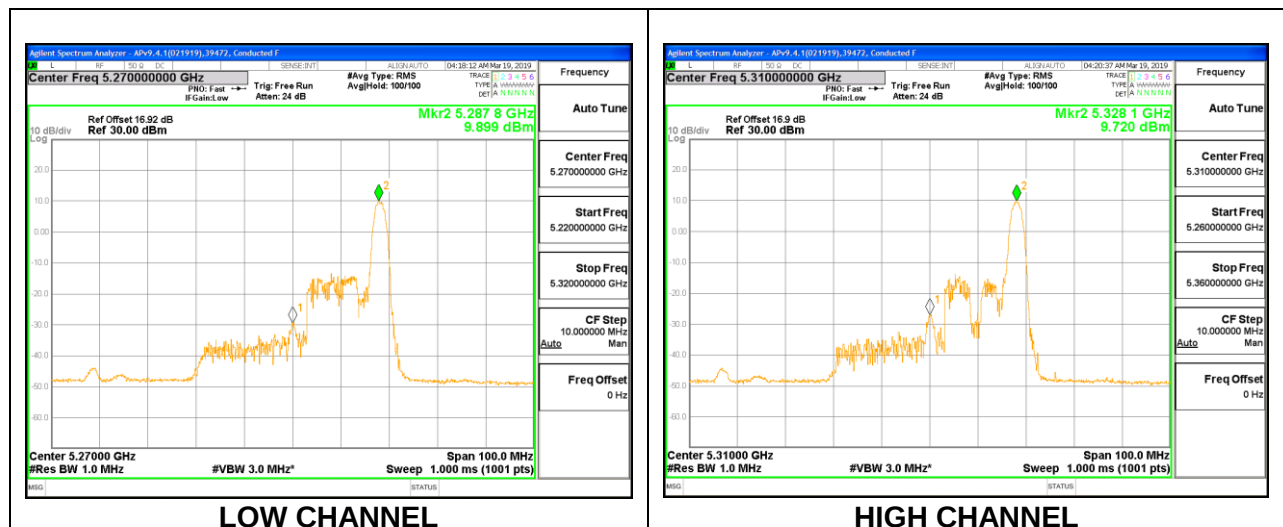

1TX Antenna 5 MODE (FCC) – 484 Tones, RU Index 65**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	41.900	-1.30	24.00	11.00
High	5310	40.800	-1.30	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	21.200	21.200	24.00	-2.80
High	5310	15.680	15.680	24.00	-8.32

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	8.677	8.677	11.00	-2.32
High	5310	2.785	2.785	11.00	-8.22

Note: Low Ch. PSD tested at higher power.

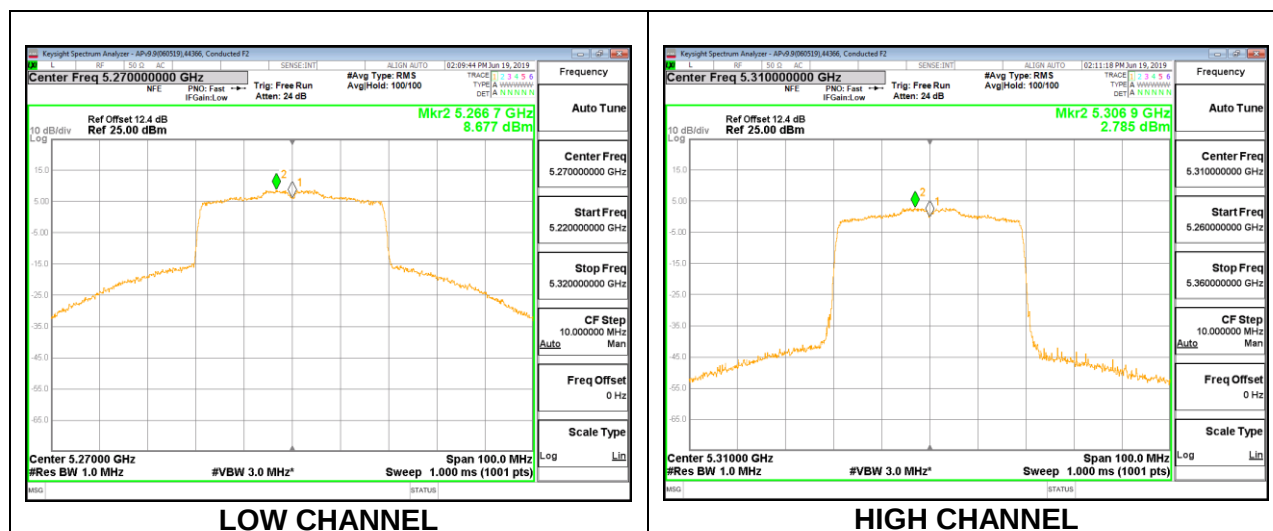

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 0**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	22.000	-1.30	24.00	11.00
High	5310	21.600	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.680	11.680	24.00	-12.32
High	5310	11.700	11.700	24.00	-12.30

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.431	9.431	11.00	-1.57
High	5310	9.592	9.592	11.00	-1.41

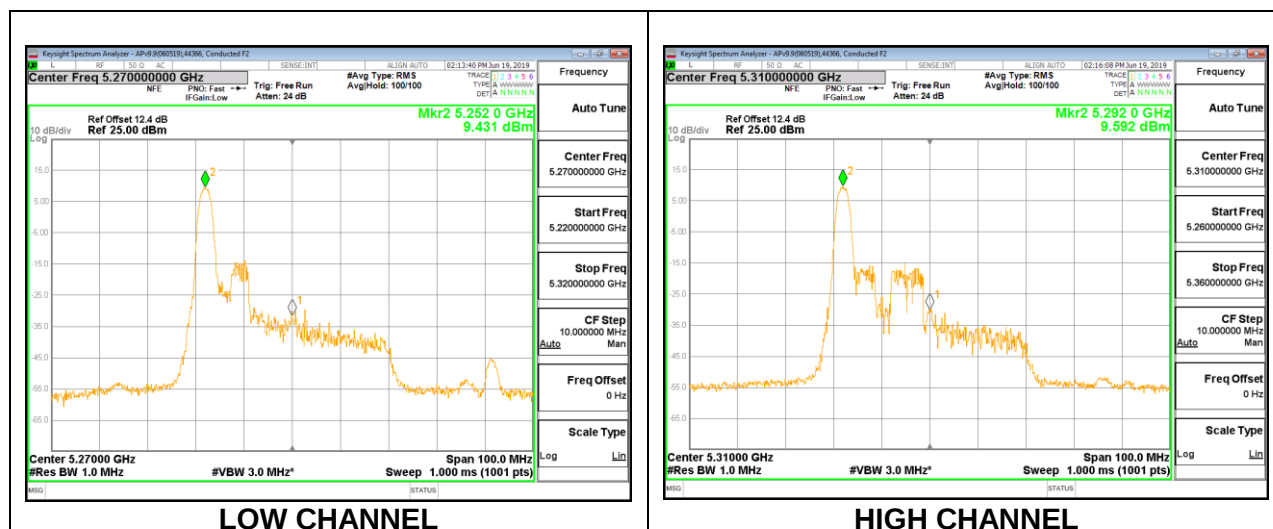

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 8**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	25.600	-1.30	24.00	11.00
High	5310	24.100	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.700	11.700	24.00	-12.30
High	5310	11.700	11.700	24.00	-12.30

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.510	9.510	11.00	-1.49
High	5310	9.556	9.556	11.00	-1.44

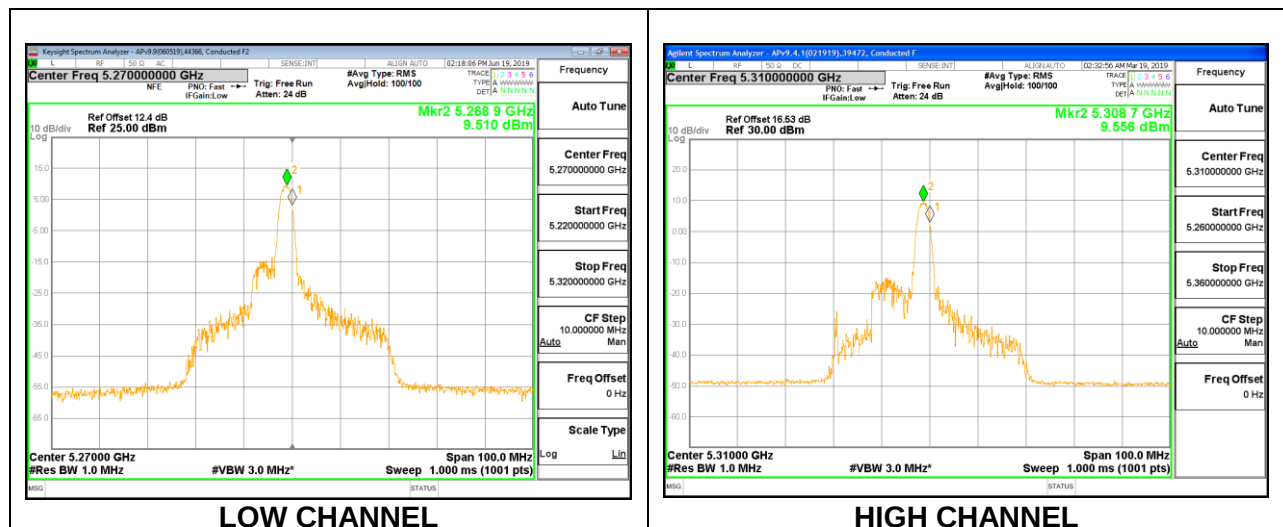

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 17**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	21.500	-1.30	24.00	11.00
High	5310	21.200	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.710	11.710	24.00	-12.29
High	5310	11.720	11.720	24.00	-12.28

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	9.667	9.667	11.00	-1.33
High	5310	9.855	9.855	11.00	-1.15

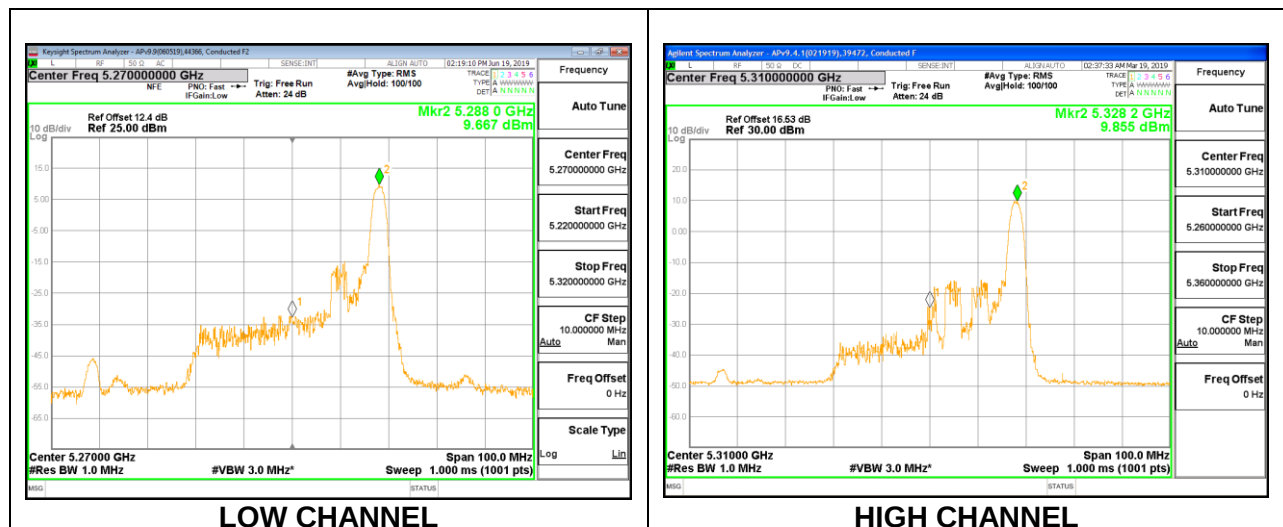

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 484 Tones, RU Index 65**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	40.700	-2.99	-0.25	24.00	11.00
High	5310	40.700	-2.99	-0.25	24.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	19.700	19.680	22.700	24.00	-1.30
High	5310	15.150	15.190	18.180	24.00	-5.82

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.392	7.093	10.255	11.00	-0.74
High	5310	3.005	3.207	6.117	11.00	-4.88

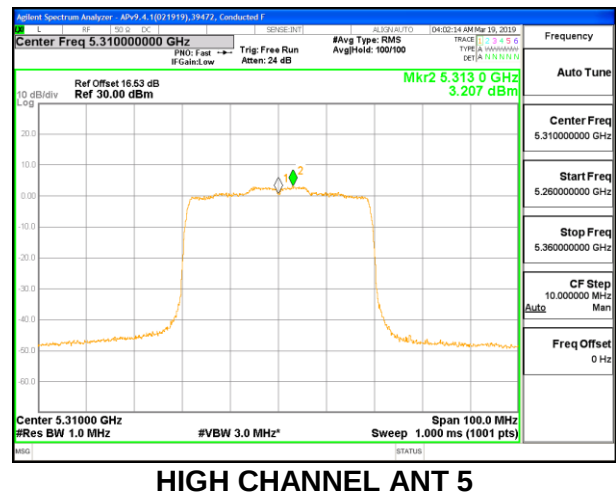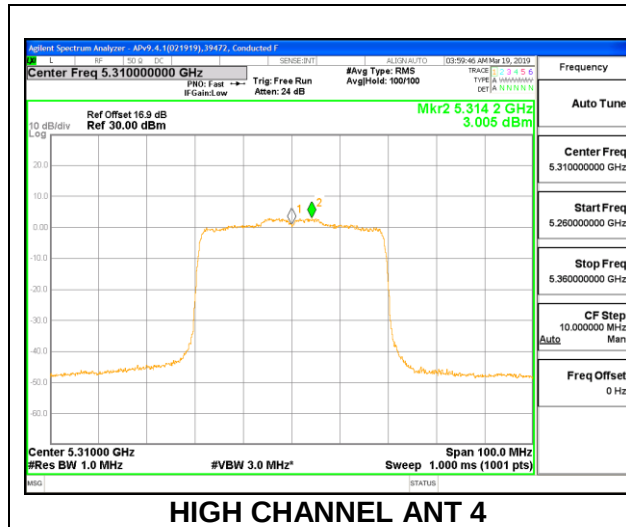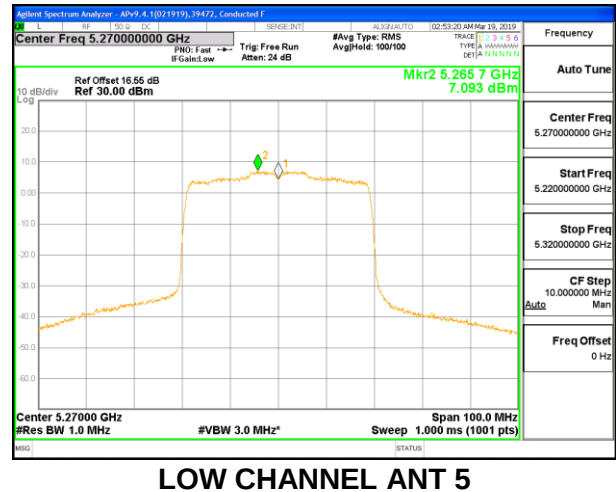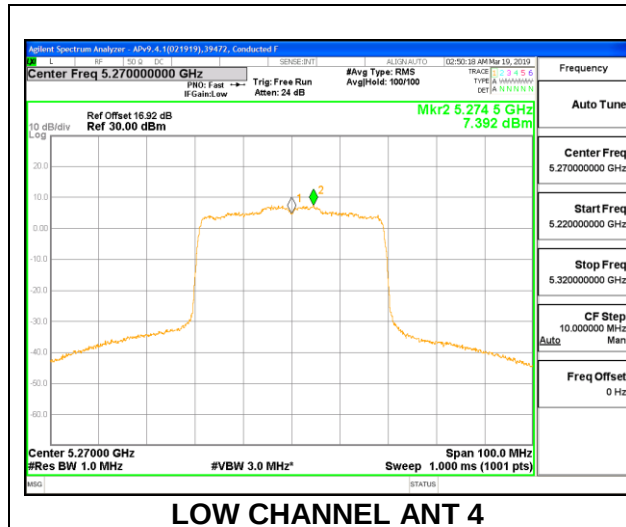

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	20.300	-2.99	-0.25	24.00	11.00
High	5310	20.300	-2.99	-0.25	24.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	8.690	8.720	11.715	24.00	-12.28
High	5310	8.700	8.730	11.725	24.00	-12.27

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.533	6.817	9.688	11.00	-1.31
High	5310	6.691	6.859	9.786	11.00	-1.21

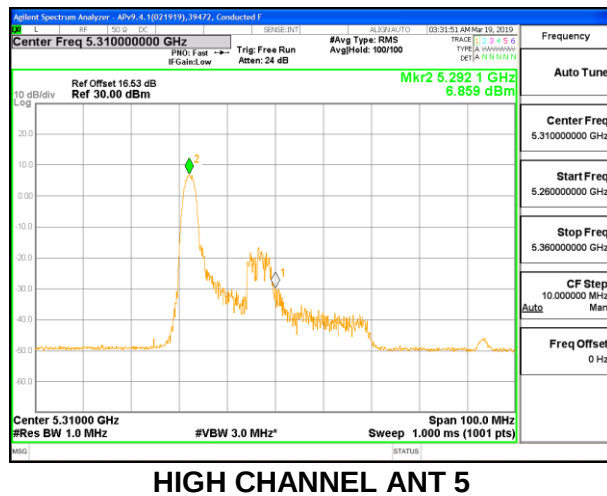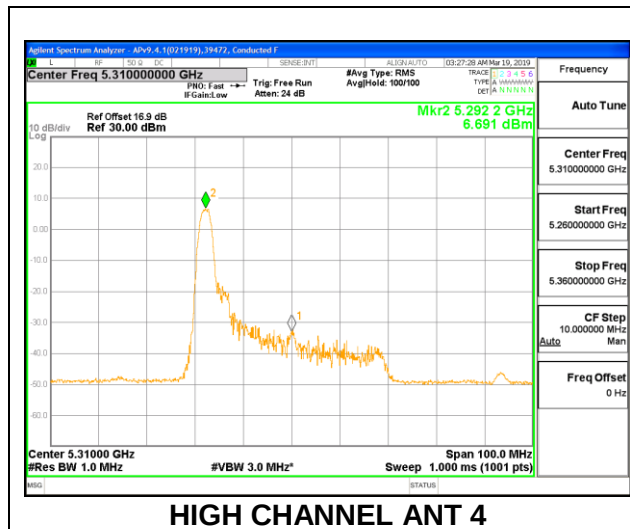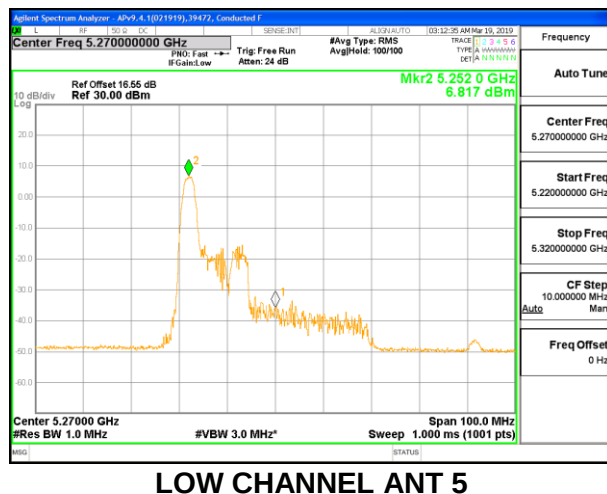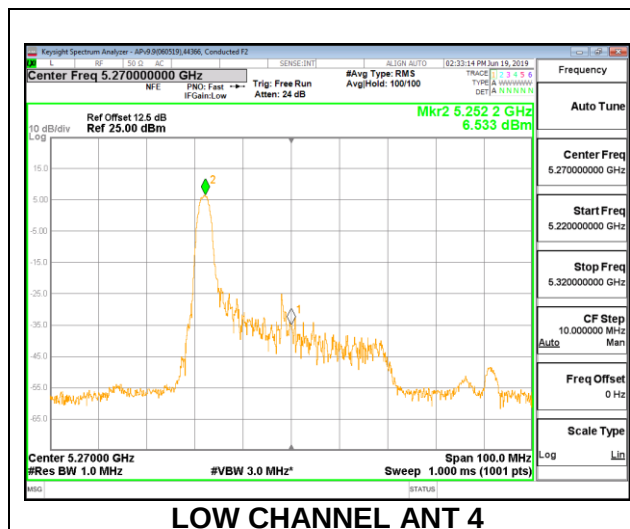

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 8**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	24.900	-2.99	-0.25	24.00	11.00
High	5310	23.600	-2.99	-0.25	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	8.720	8.700	11.720	24.00	-12.28
High	5310	8.690	8.690	11.700	24.00	-12.30

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.863	6.748	9.816	11.00	-1.18
High	5310	6.502	6.436	9.479	11.00	-1.52

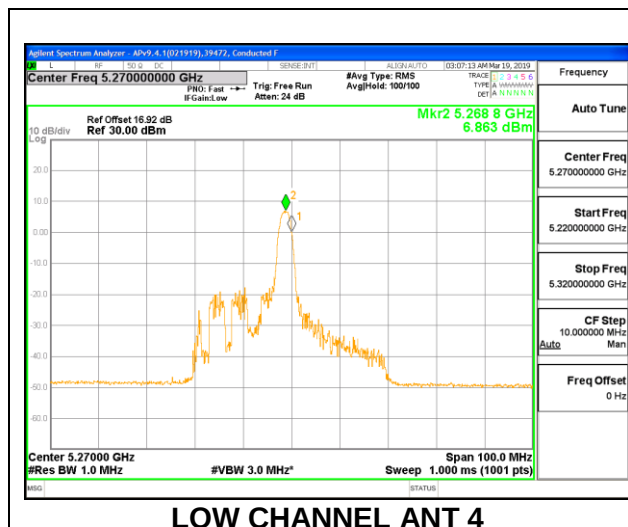

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 17**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	20.400	-2.99	-0.25	24.00	11.00
High	5310	20.600	-2.99	-0.25	24.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	8.710	8.700	11.715	24.00	-12.28
High	5310	8.700	8.690	11.705	24.00	-12.29

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.751	6.601	9.687	11.00	-1.31
High	5310	6.622	6.594	9.618	11.00	-1.38

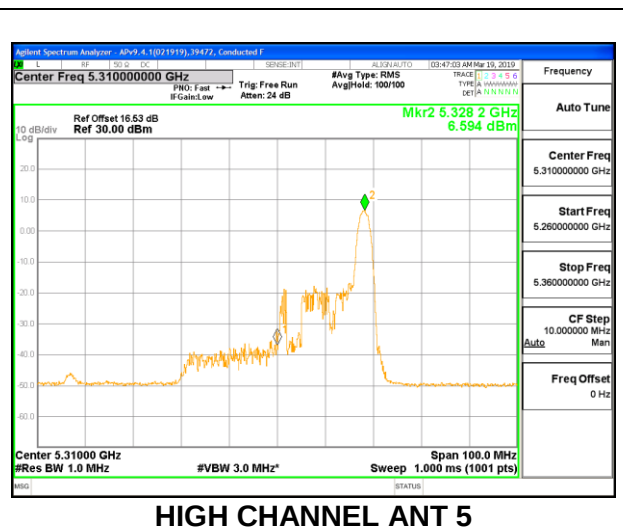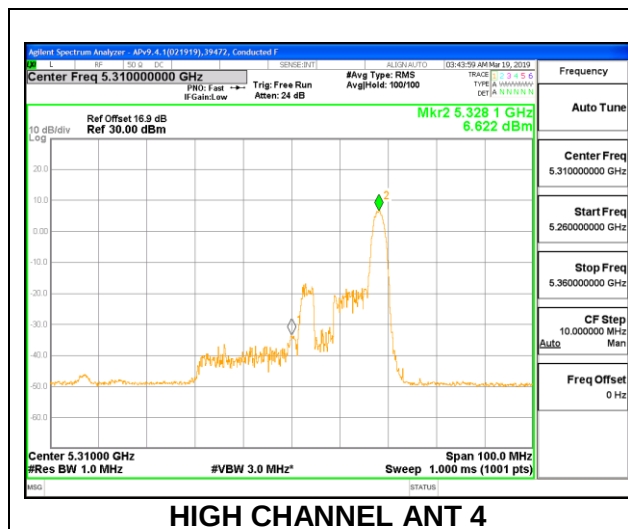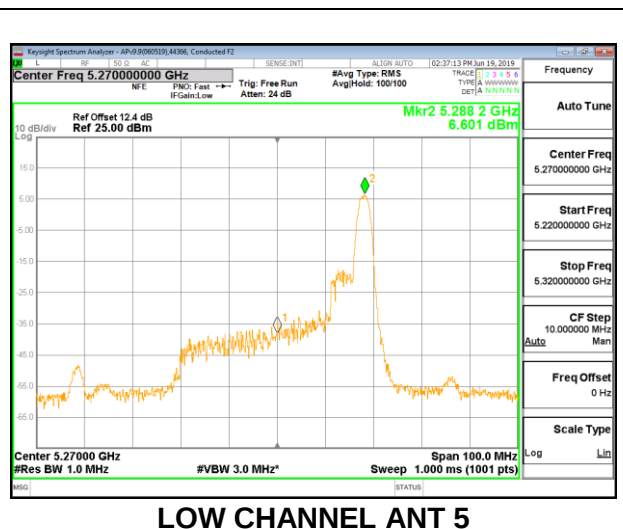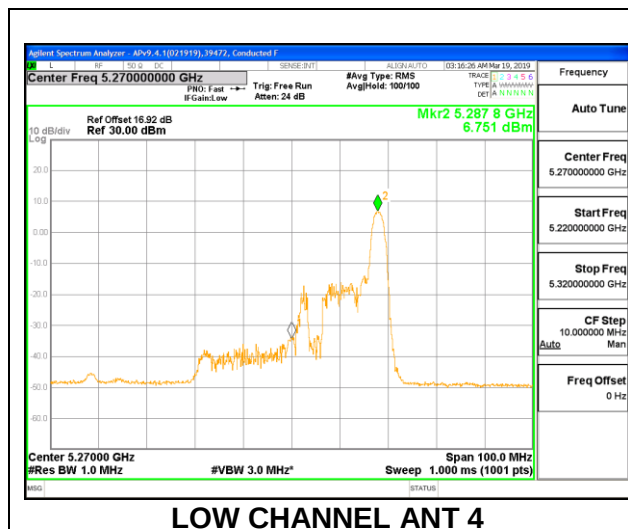

8.5.12. 802.11ax HE80 MODE IN THE 5.3 GHz BAND**1TX Antenna 4 MODE (FCC) – 996 Tones, RU Index 67****Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	82.600	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.720	15.720	24.00	-8.28

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-0.200	-0.200	11.00	-11.20

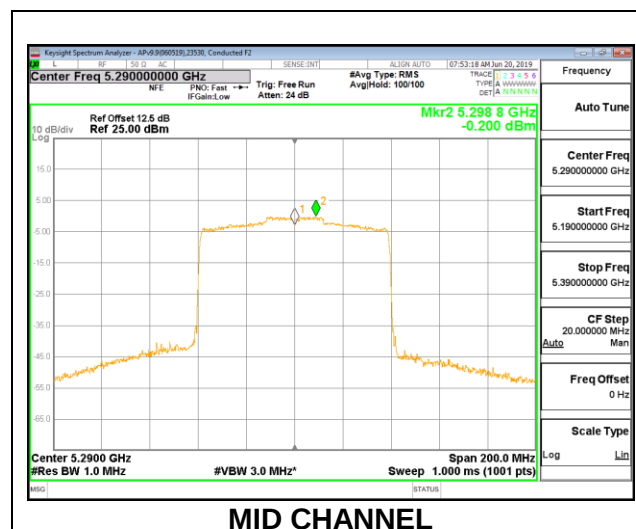

1TX Antenna 4 MODE (FCC) – 26 Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	21.200	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.730	11.730	24.00	-12.27

PSD Results

Channel	Frequency	Meas PSD	Total Corr'd PSD	PSD Limit	PSD Margin
	(MHz)	(dBm/1MHz)	(dBm/1MHz)	(dBm/1MHz)	(dB)
Mid	5290	9.708	9.708	11.00	-1.29

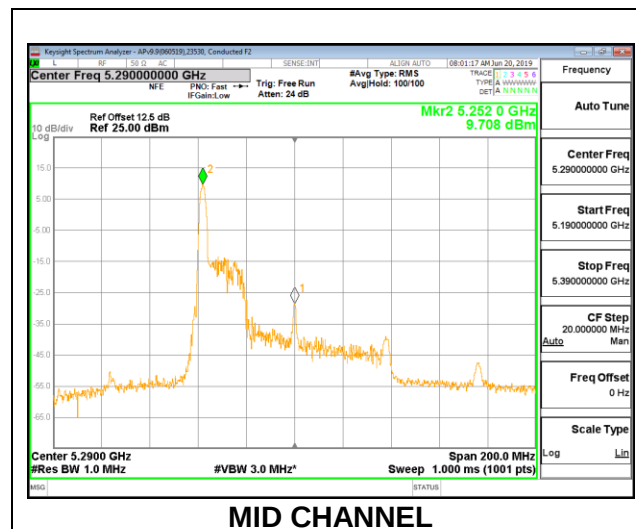

1TX Antenna 4 MODE (FCC) – 26 Tones, RU Index 18**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	46.400	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.700	11.700	24.00	-12.30

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	8.524	8.524	11.00	-2.48

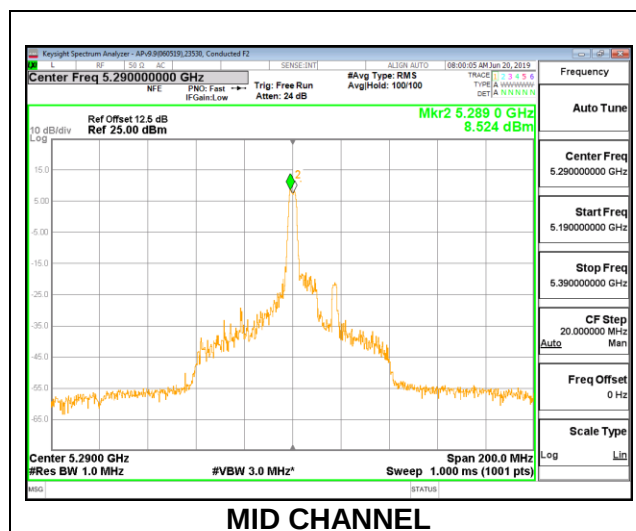

1TX Antenna 4 MODE (FCC) – 26 Tones, RU Index 36**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	22.000	-5.80	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.680	11.680	24.00	-12.32

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	9.534	9.534	11.00	-1.47

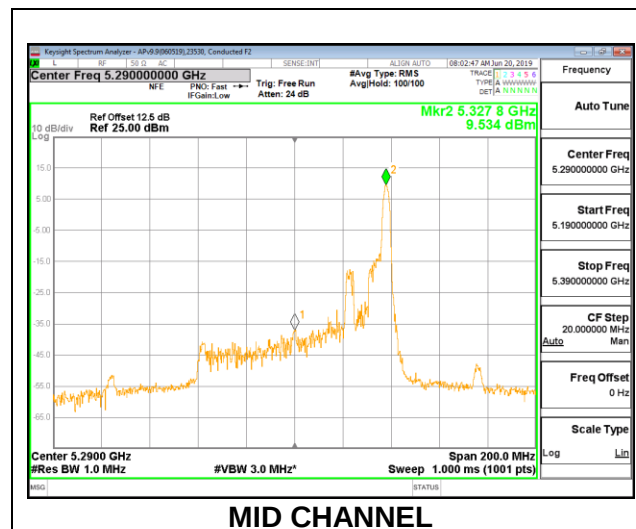

1TX Antenna 5 MODE (FCC) – 996 Tones, RU Index 67

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	83.200	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.710	15.710	24.00	-8.29

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-0.221	-0.221	11.00	-11.22

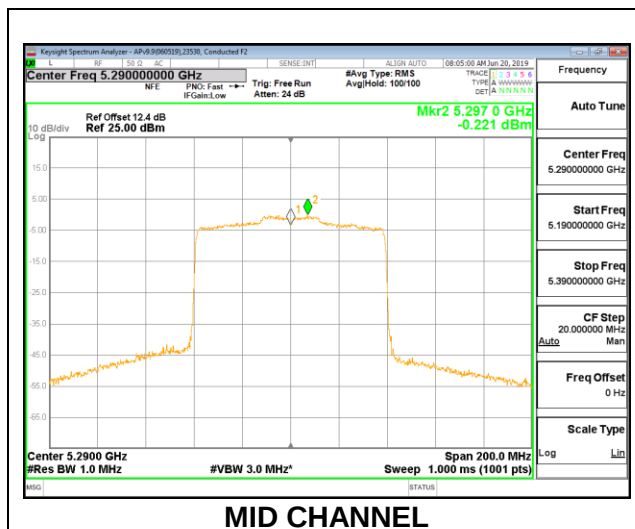

1TX Antenna 5 MODE (FCC) – 996 Tones, RU Index 67**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	83.200	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.64	15.64	24.00	-8.36

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-0.221	-0.22	11.00	-11.22

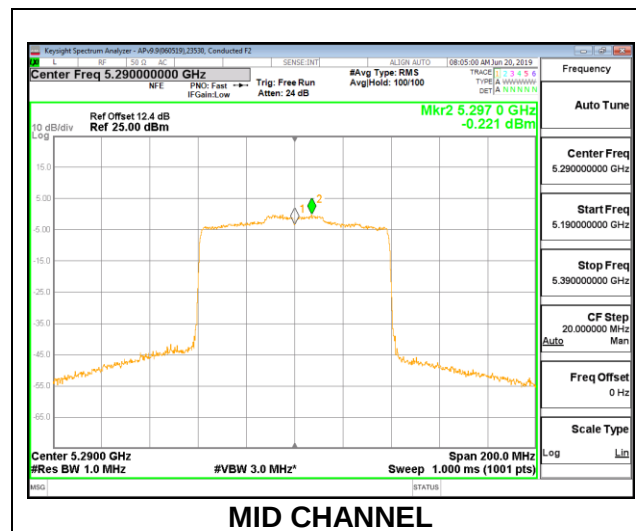

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 0**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	21.000	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.690	11.690	24.00	-12.31

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	9.456	9.456	11.00	-1.54

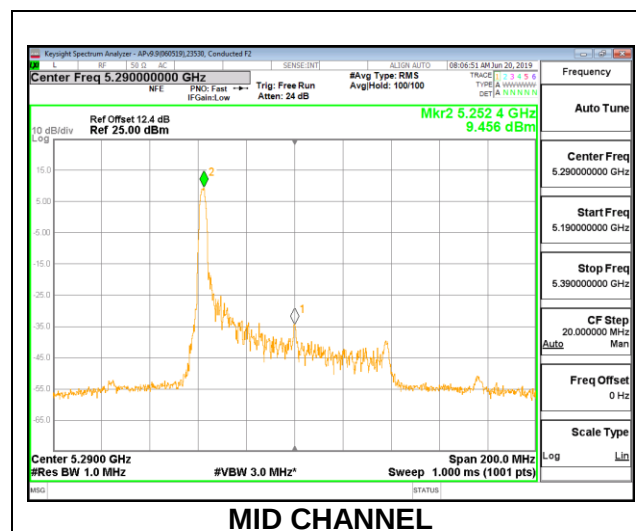

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 18**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	46.200	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.690	11.690	24.00	-12.31

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	8.761	8.761	11.00	-2.24

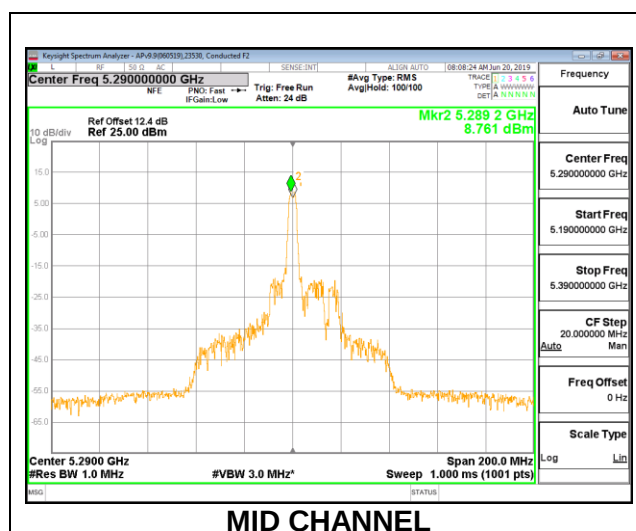

1TX Antenna 5 MODE (FCC) – 26 Tones, RU Index 36**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	22.400	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.710	11.710	24.00	-12.29

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	9.689	9.689	11.00	-1.31

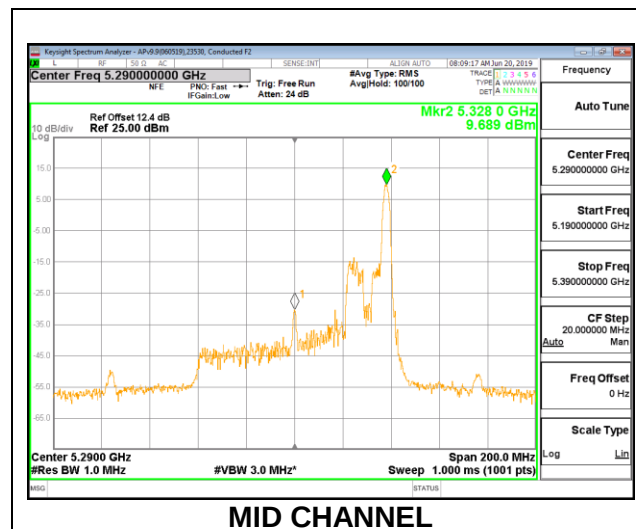

1TX Antenna 5 MODE (FCC) – 996 Tones, RU Index 67**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	83.200	-1.30	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.78	15.78	24.00	-8.22

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-0.221	-0.22	11.00	-11.22

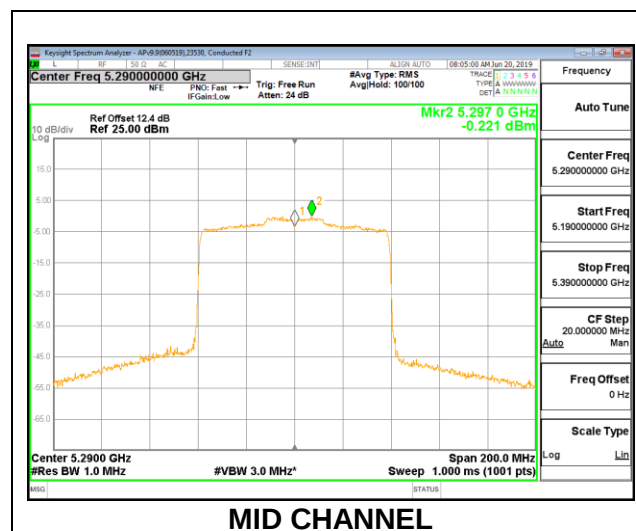

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 996 Tones, RU Index 67**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	84.600	-2.99	-0.25	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	14.720	14.730	17.735	24.00	-6.26

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-0.975	-0.866	2.090	11.00	-8.91

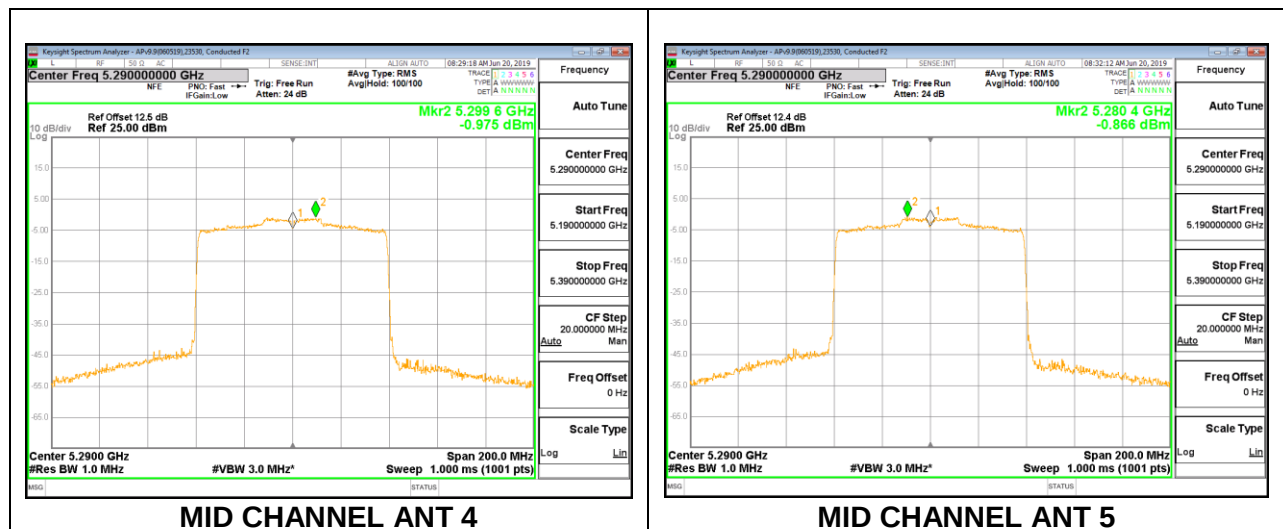

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 0**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	20.800	-2.99	-0.25	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	8.700	8.690	11.705	24.00	-12.29

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	6.777	6.638	9.718	11.00	-1.28

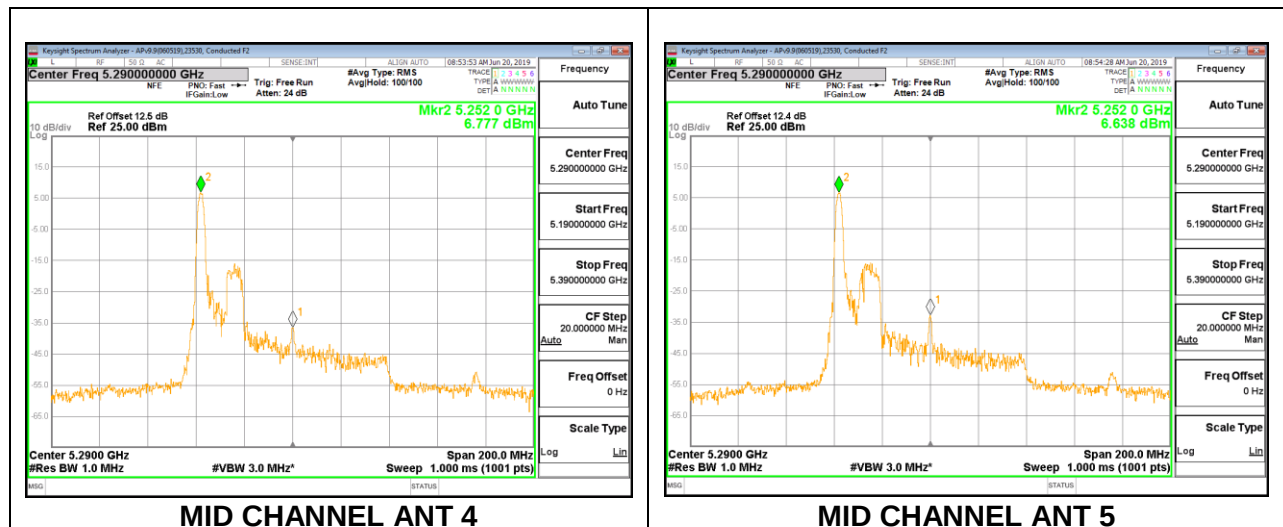

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 18**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	42.000	-2.99	-0.25	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	8.700	8.720	11.720	24.00	-12.28

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	5.392	5.537	8.475	11.00	-2.52

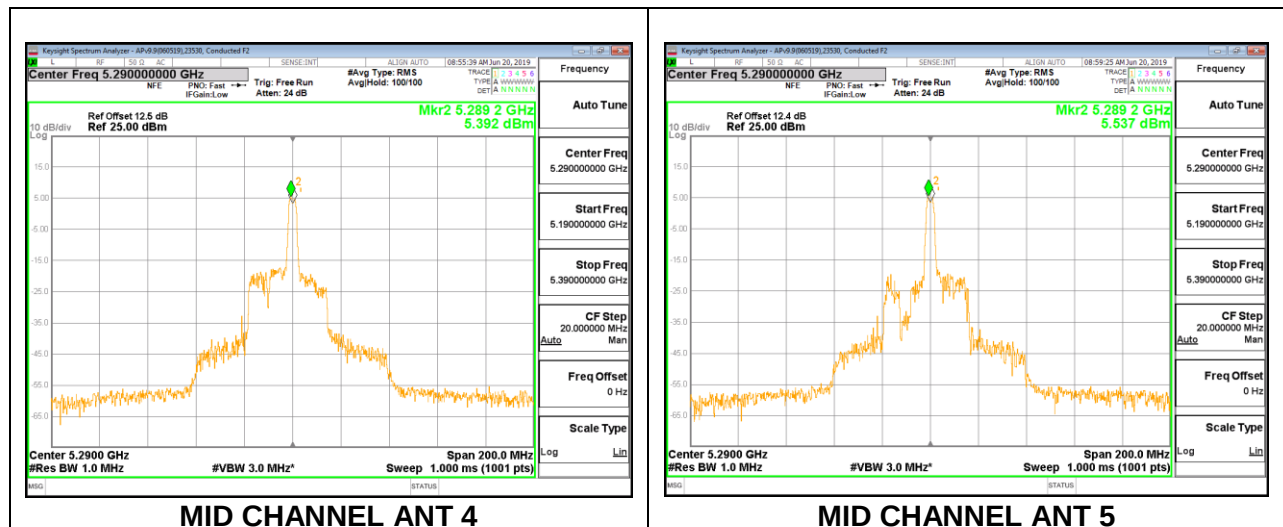

2TX Antenna 4 + Antenna 5 OFDMA MODE (FCC) – 26 Tones, RU Index 36**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	22.400	-2.99	-0.25	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	8.690	8.670	11.690	24.00	-12.31

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/1MHz)	Ant 5 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	6.648	6.409	9.540	11.00	-1.46

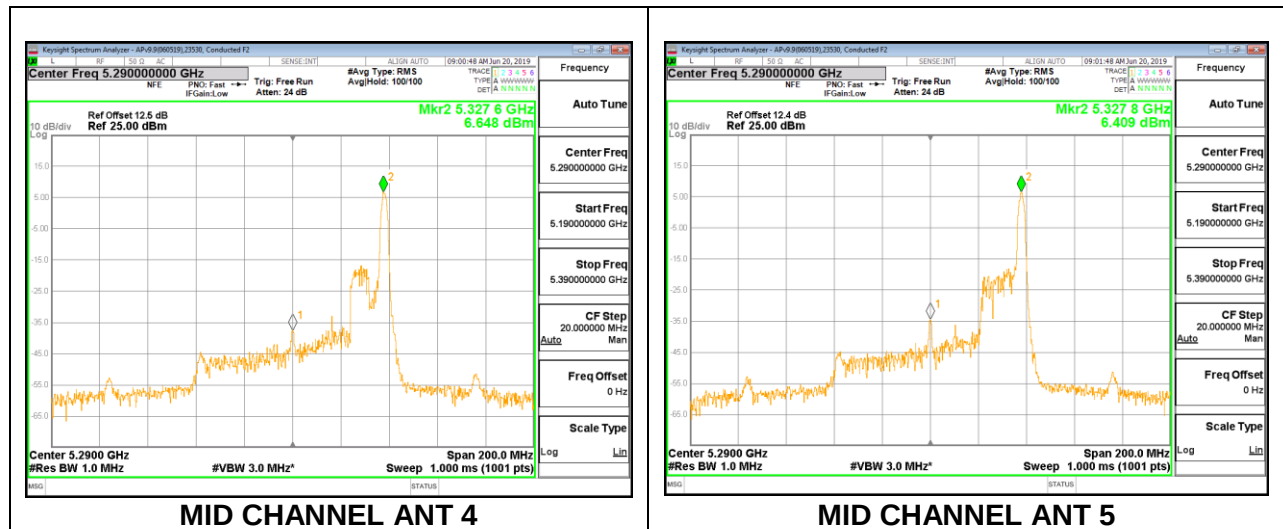

8.5.13. 802.11n HT20 MODE IN THE 5.6 GHz BAND**1TX Antenna 4 MODE (FCC)****Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	21.950	17.608	-4.00
Mid	5580	22.100	17.764	-4.00
High	5700	22.300	17.715	-4.00
144	5720	16.075	13.859	-4.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/1MHz)	ISED PSD Limit (dBm/1MHz)	PSD Limit (dBm/1MHz)
Low	5500	24.00	23.46	29.46	23.46	11.00	11.00	11.00
Mid	5580	24.00	23.50	29.50	23.50	11.00	11.00	11.00
High	5700	24.00	23.48	29.48	23.48	11.00	11.00	11.00
144	5720	23.06	22.42	28.42	22.42	11.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results



Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	18.640	18.640	23.46	-4.82
Mid	5580	20.690	20.690	23.50	-2.81
High	5700	18.620	18.620	23.48	-4.86
144	5720	20.783	20.783	22.42	-1.63

PSD Results


Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	9.100	9.100	11.00	-1.90
Mid	5580	10.641	10.641	11.00	-0.36
High	5700	9.093	9.093	11.00	-1.91
144	5720	10.532	10.532	11.00	-0.47

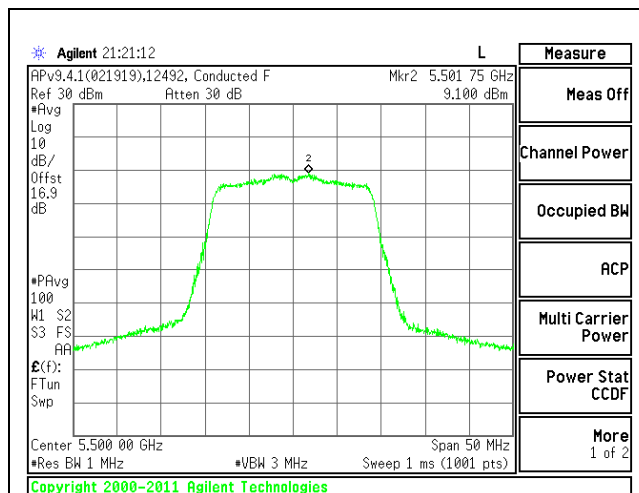

LOW CHANNEL

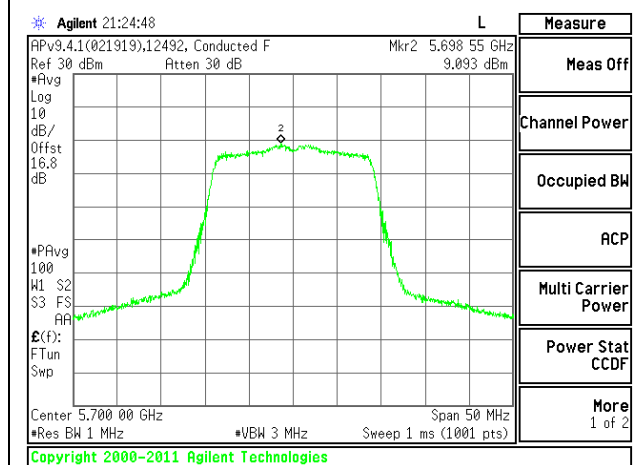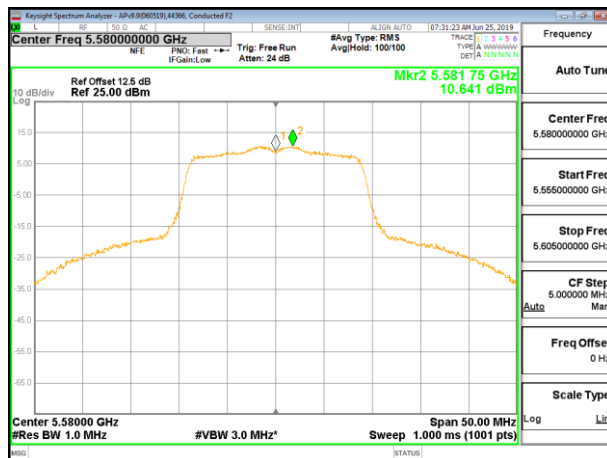

HIGH CHANNEL

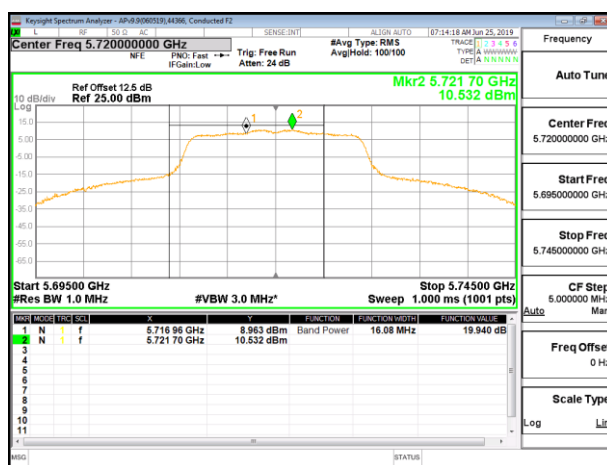

1TX Antenna 5 MODE (FCC)**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	22.050	17.836	-1.20
Mid	5580	22.000	17.664	-1.20
High	5700	22.150	17.757	-1.20
144	5720	22.100	17.665	-1.20

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/1MHz)	ISED PSD Limit (dBm/1MHz)	PSD Limit (dBm/1MHz)
Low	5500	24.00	23.51	29.51	23.51	11.00	11.00	11.00
Mid	5580	24.00	23.47	29.47	23.47	11.00	11.00	11.00
High	5700	24.00	23.49	29.49	23.49	11.00	11.00	11.00
144	5720	24.00	23.47	29.47	23.47	11.00	11.00	11.00





Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	18.620	18.620	23.51	-4.89
Mid	5580	20.700	20.700	23.47	-2.77
High	5700	18.570	18.570	23.49	-4.92
144	5720	20.801	20.801	23.47	-2.67

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	8.935	8.935	11.00	-2.07
Mid	5580	10.641	10.641	11.00	-0.36
High	5700	8.496	8.496	11.00	-2.50
144	5720	10.632	10.632	11.00	-0.37

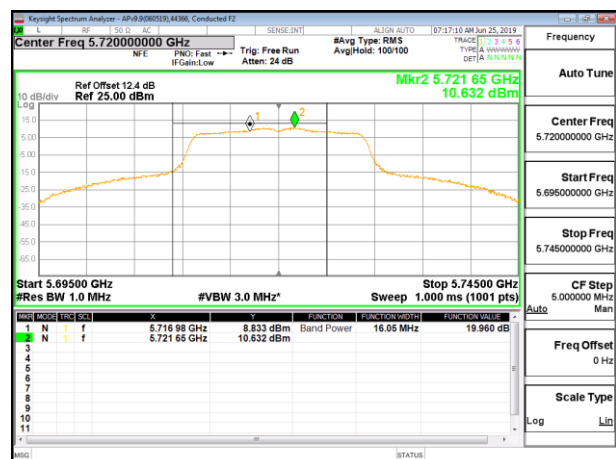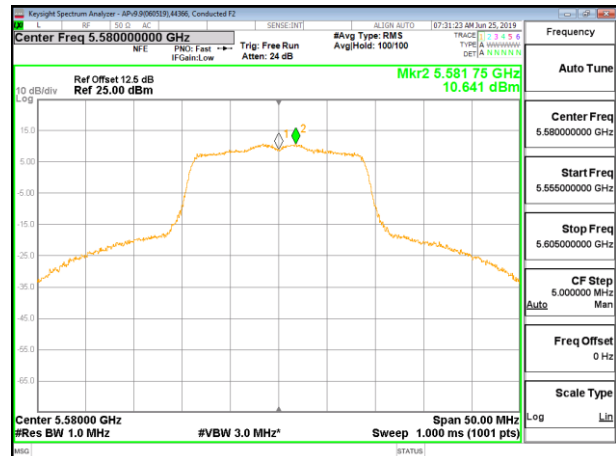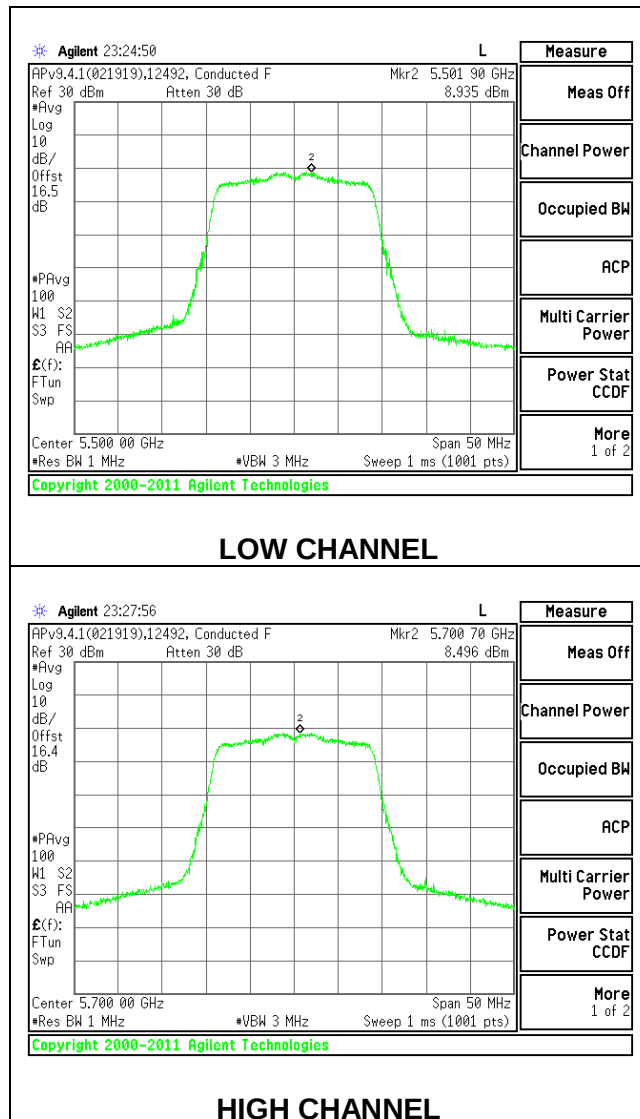

2TX Antenna 4 + Antenna 5 CDD MODE (FCC)**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5500	21.600	17.598	-2.38	0.52
Mid	5580	21.700	17.697	-2.38	0.52
High	5700	21.650	17.680	-2.38	0.52
144	5720	15.800	13.820	-2.38	0.52

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5500	24.00	23.45	29.45	23.45	11.00	11.00	11.00
Mid	5580	24.00	23.48	29.48	23.48	11.00	11.00	11.00
High	5700	24.00	23.47	29.47	23.47	11.00	11.00	11.00
144	5720	22.99	22.41	28.41	22.41	11.00	11.00	11.00







Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	17.640	17.710	20.685	23.45	-2.77
Mid	5580	17.690	17.670	20.690	23.48	-2.79
High	5700	17.680	17.670	20.685	23.47	-2.79
144	5720	17.954	17.852	20.914	22.41	-1.49

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/ 1MHz)	Ant 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	7.628	8.028	10.843	11.00	-0.16
Mid	5580	7.895	7.736	10.827	11.00	-0.17
High	5700	7.769	7.803	10.796	11.00	-0.20
144	5720	7.827	7.506	10.680	11.00	-0.32

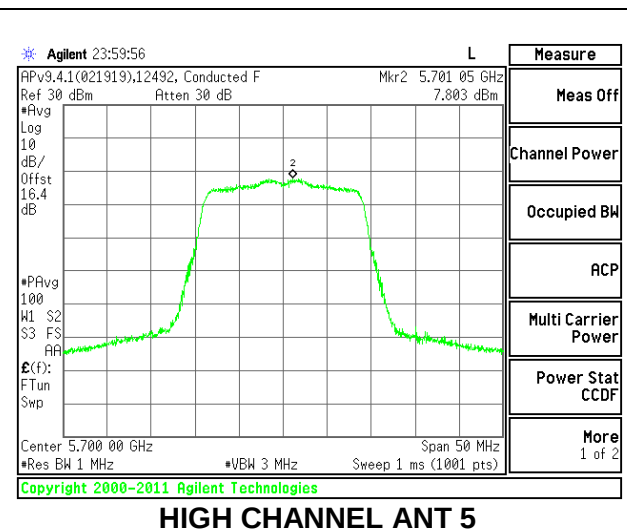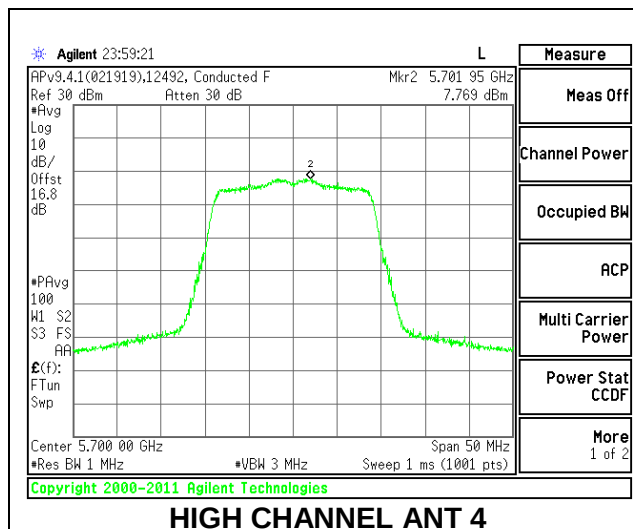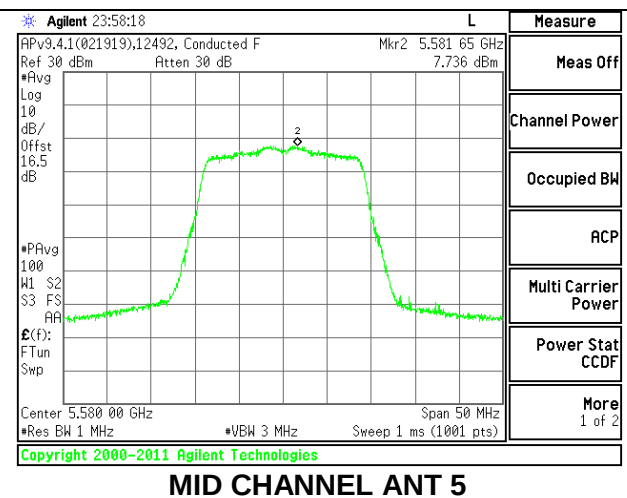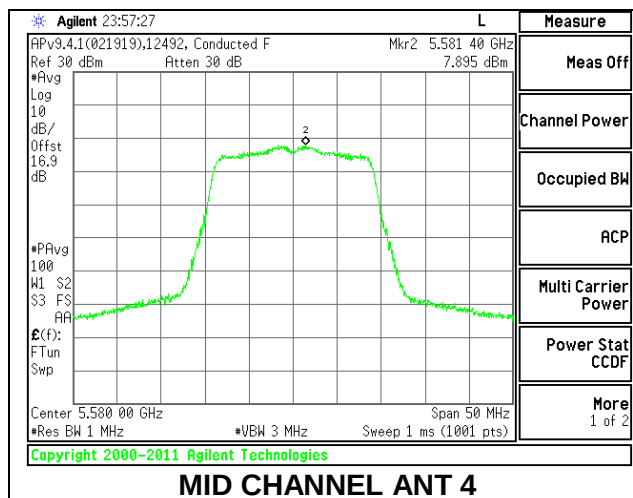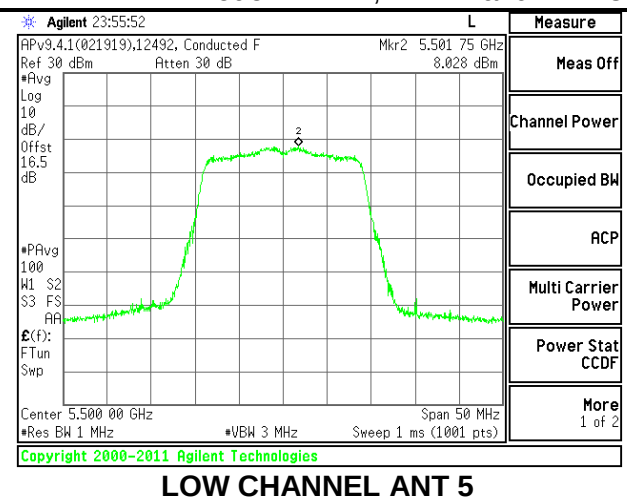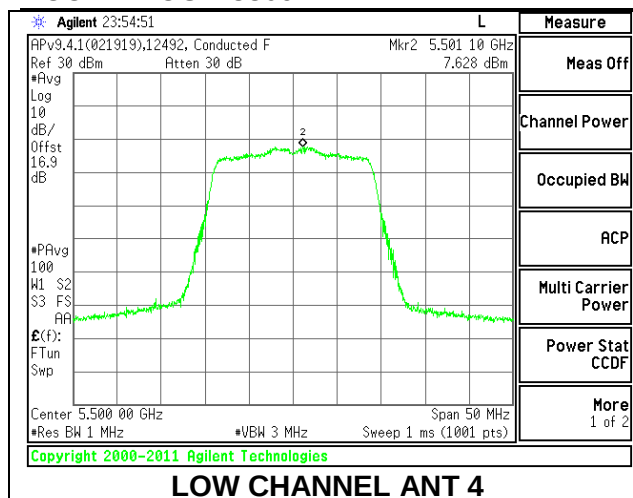

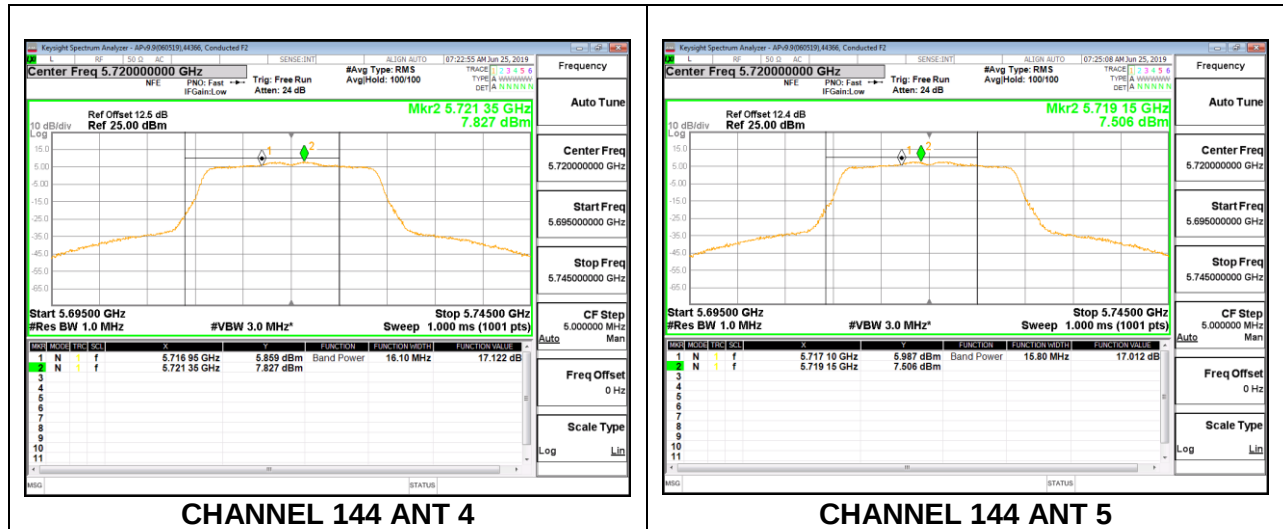

8.5.14. 802.11n HT40 MODE IN THE 5.6 GHz BAND**1TX Antenna 4 MODE (FCC)****Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5510	40.800	36.155	-4.00
Mid	5550	41.000	36.173	-4.00
High	5670	40.800	36.256	-4.00
142	5710	35.350	33.128	-4.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5510	24.00	24.00	30.00	24.00	11.00	11.00	11.00
Mid	5550	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5670	24.00	24.00	30.00	24.00	11.00	11.00	11.00
142	5710	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	17.170	17.170	24.00	-6.83
Mid	5550	21.160	21.160	24.00	-2.84
High	5670	21.190	21.190	24.00	-2.81
142	5710	20.834	20.924	24.00	-3.08

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	4.115	4.205	11.00	-6.80
Mid	5550	8.761	8.851	11.00	-2.15
High	5670	8.862	8.952	11.00	-2.05
142	5710	8.037	8.127	11.00	-2.87

Note: Mid, High Ch.PSD tested at higher power

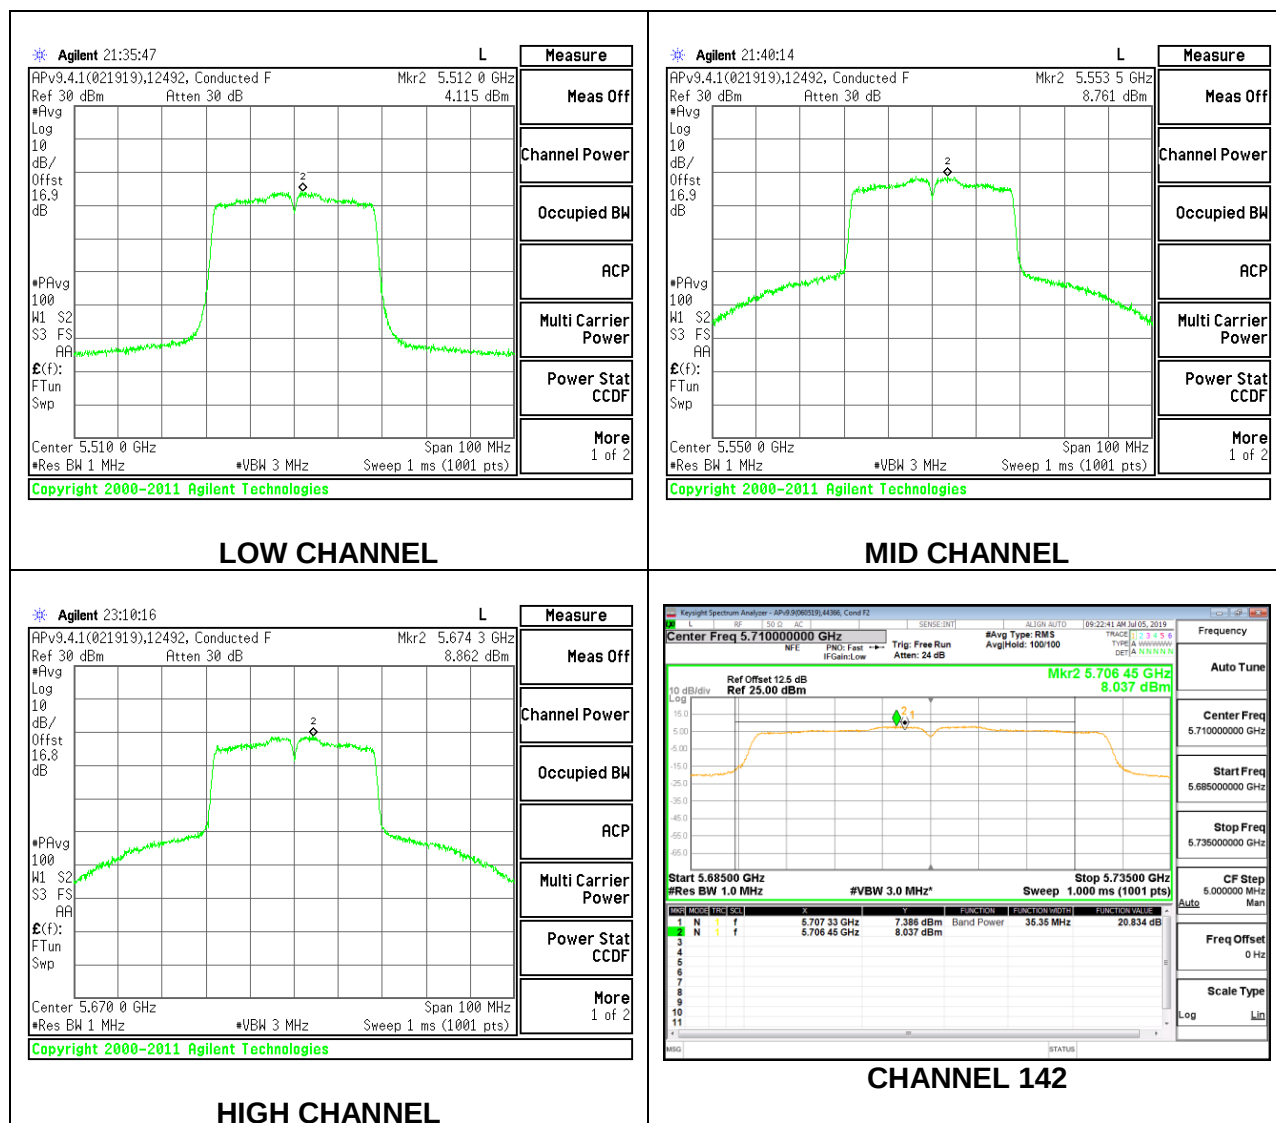

1TX Antenna 5 MODE (FCC)**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5510	40.800	36.291	-1.20
Mid	5550	40.900	36.061	-1.20
High	5670	40.800	36.088	-1.20
142	5710	40.800	36.109	-1.20

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5510	24.00	24.00	30.00	24.00	11.00	11.00	11.00
Mid	5550	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5670	24.00	24.00	30.00	24.00	11.00	11.00	11.00
142	5710	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	17.230	17.230	24.00	-6.77
Mid	5550	21.160	21.160	24.00	-2.84
High	5670	21.210	21.210	24.00	-2.79
142	5710	20.705	20.795	24.00	-3.21

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	4.548	4.638	11.00	-6.36
Mid	5550	8.687	8.777	11.00	-2.22
High	5670	8.977	9.067	11.00	-1.93
142	5710	7.878	7.968	11.00	-3.03

Note: Mid, High Ch.PSD tested at higher power

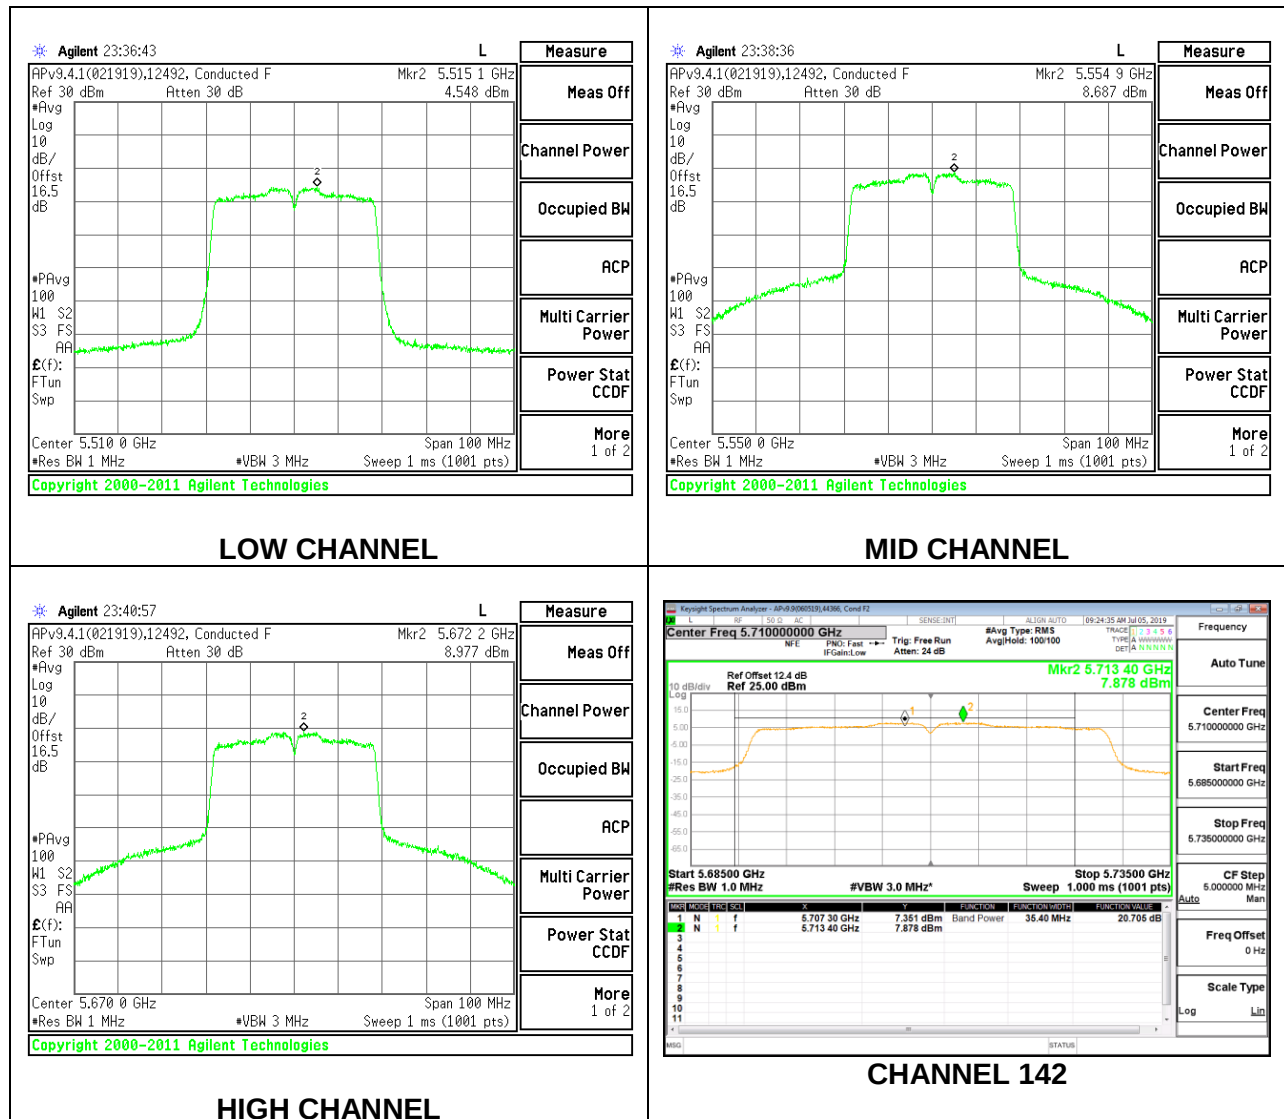

2TX Antenna 4 + Antenna 5 CDD MODE (FCC)**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5510	40.500	36.131	-2.38	0.52
Mid	5550	40.400	36.237	-2.38	0.52
High	5670	40.300	36.295	-2.38	0.52
142	5710	40.500	36.061	-2.38	0.52

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5510	24.00	24.00	30.00	24.00	11.00	11.00	11.00
Mid	5550	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5670	24.00	24.00	30.00	24.00	11.00	11.00	11.00
142	5710	24.00	24.00	30.00	24.00	11.00	11.00	11.00







Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	16.230	16.220	19.235	24.00	-4.76
Mid	5550	19.610	19.600	22.615	24.00	-1.38
High	5670	19.670	19.630	22.660	24.00	-1.34
142	5710	19.632	19.505	22.669	24.00	-1.33

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/ 1MHz)	Ant 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	3.899	3.869	6.984	11.00	-4.02
Mid	5550	6.499	6.426	9.563	11.00	-1.44
High	5670	6.804	6.679	9.842	11.00	-1.16
142	5710	6.839	6.637	9.839	11.00	-1.16

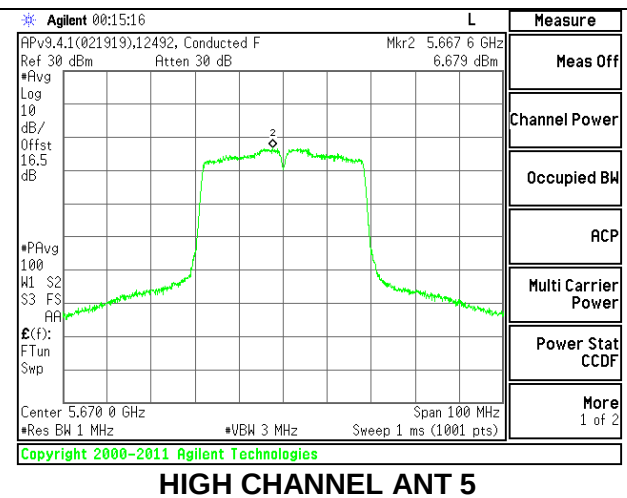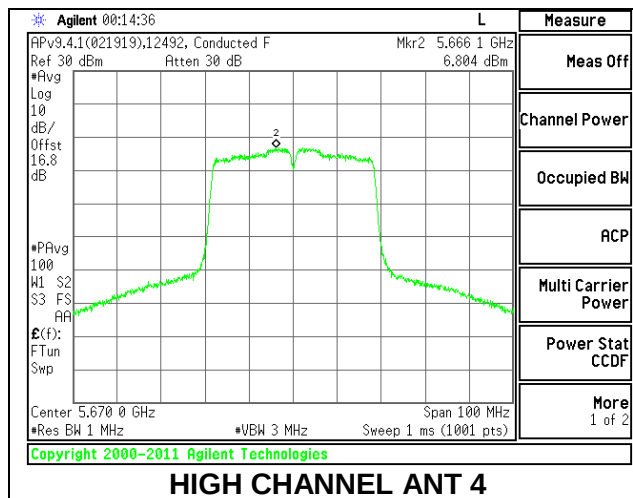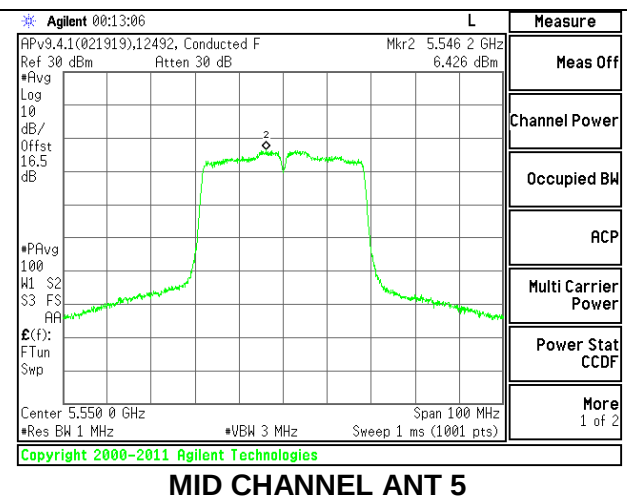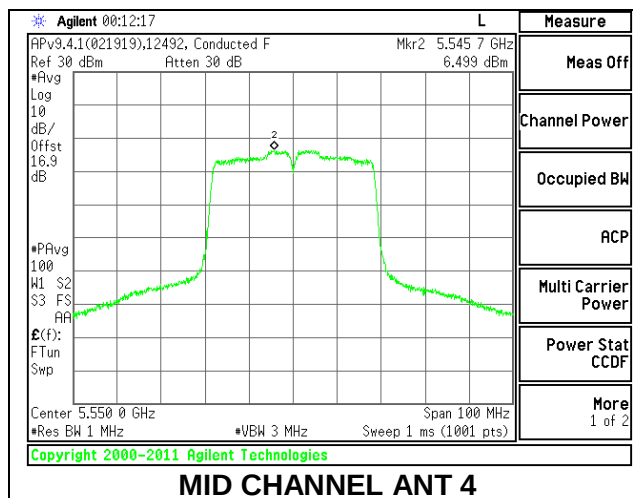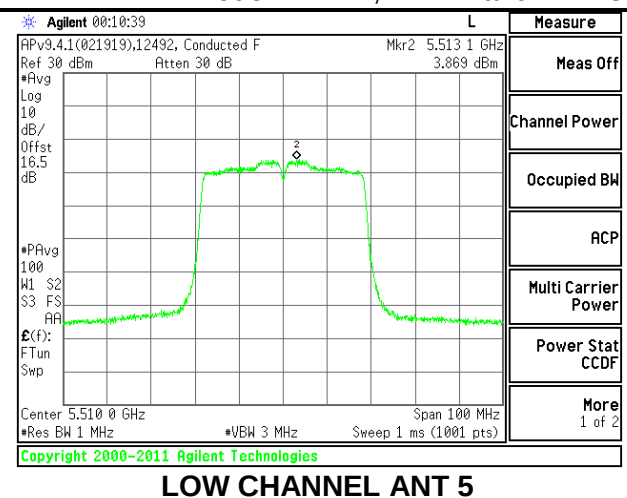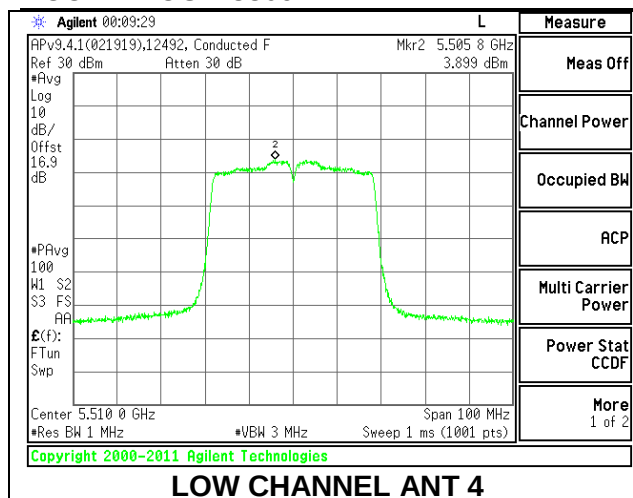

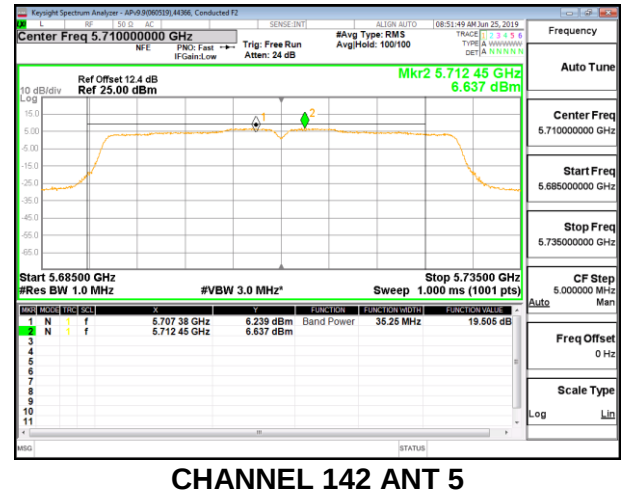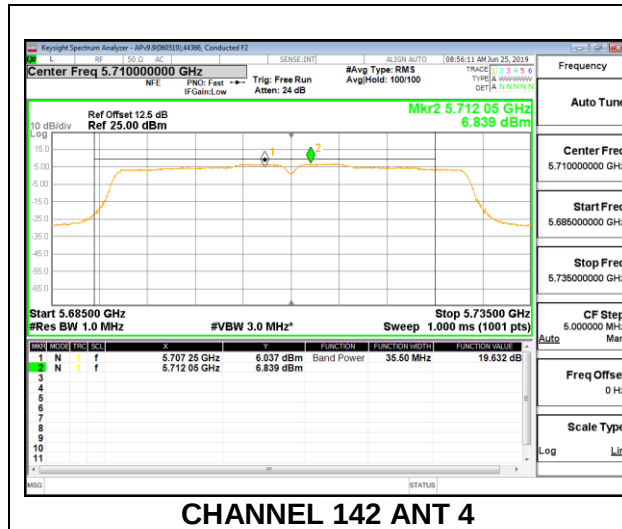

8.5.15. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND**1TX Antenna 4 MODE (FCC)****Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5530	83.800	75.857	-4.00
High	5610	84.000	75.290	-4.00
138	5690	77.100	72.740	-4.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5530	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5610	24.00	24.00	30.00	24.00	11.00	11.00	11.00
138	5690	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	15.710	15.710	24.00	-8.29
High	5610	21.190	21.190	24.00	-2.81
138	5690	21.149	21.339	24.00	-2.66


PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	1.080	1.270	11.00	-9.73
High	5610	5.826	6.016	11.00	-4.98
138	5690	5.057	5.247	11.00	-5.75

Note: High Ch. PSD tested at higher power.

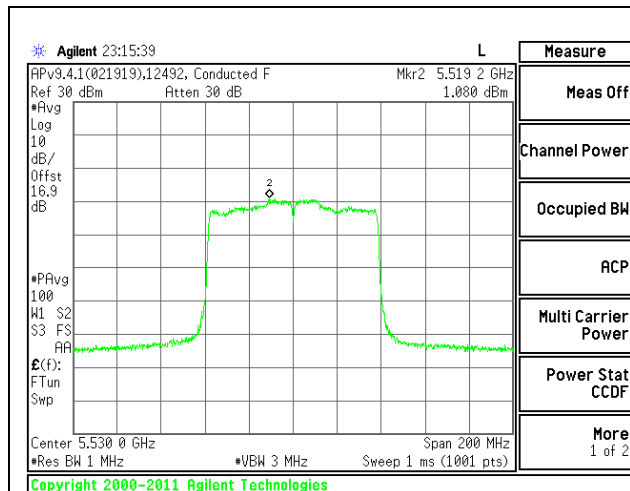

LOW CHANNEL

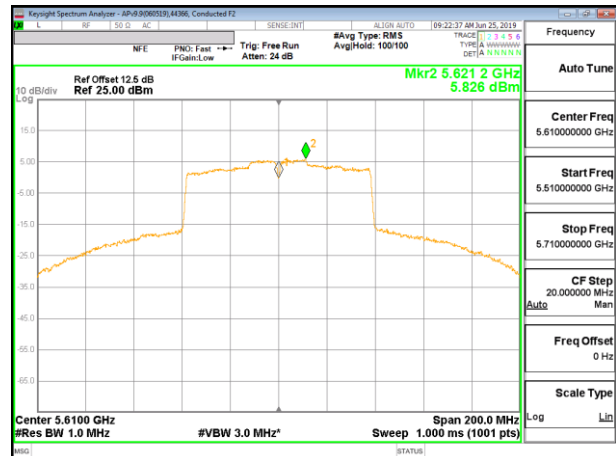

HIGH CHANNEL



CHANNEL 138

1TX Antenna 5 MODE (FCC)**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5530	83.800	75.524	-1.20
High	5610	83.600	75.619	-1.20
138	5690	76.800	72.748	-1.20

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5530	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5610	24.00	24.00	30.00	24.00	11.00	11.00	11.00
138	5690	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	15.630	15.630	24.00	-8.37
High	5610	21.160	21.160	24.00	-2.84
138	5690	21.052	21.242	24.00	-2.76

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	0.797	0.987	11.00	-10.01
High	5610	5.801	5.991	11.00	-5.01
138	5690	4.915	5.105	11.00	-5.90

Note: High Ch. PSD tested at higher power.

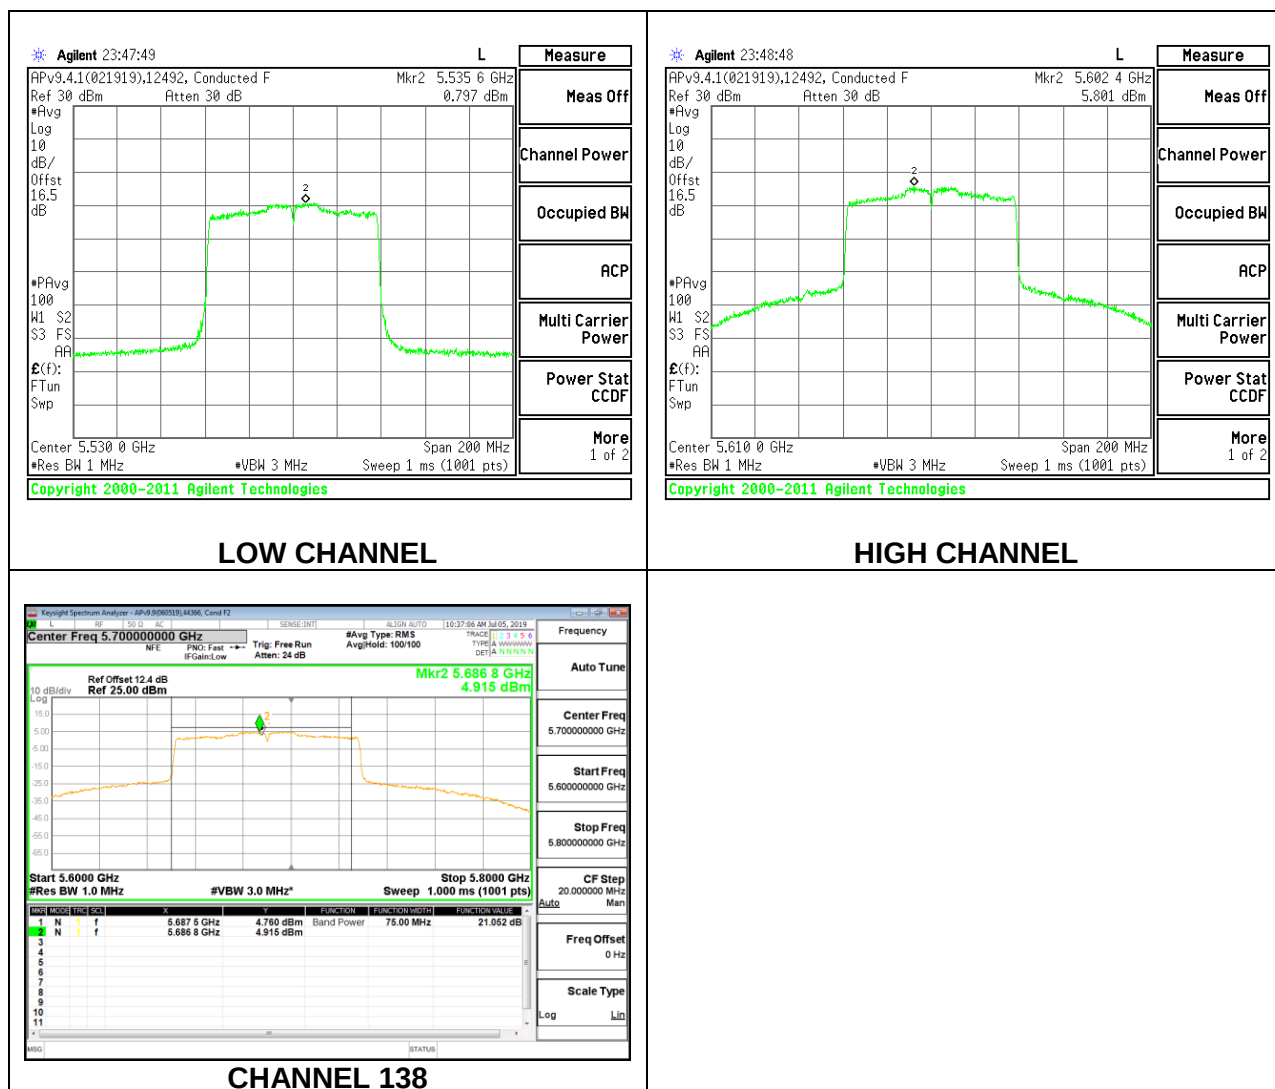

2TX Antenna 4 + Antenna 5 CDD MODE (FCC)

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5530	84.000	75.475	-2.38	0.52
High	5610	83.800	75.797	-2.38	0.52
138	5690	76.800	72.842	-2.38	0.52

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5530	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5610	24.00	24.00	30.00	24.00	11.00	11.00	11.00
138	5690	24.00	24.00	30.00	24.00	11.00	11.00	11.00







Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Ant 4 Meas Power (dBm)	Ant 5 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margi (dB)
Low	5530	15.190	15.210	18.210	24.00	-5.79
High	5610	19.670	19.730	22.710	24.00	-1.29
138	5690	19.695	19.734	22.915	24.00	-1.09

PSD Results

Channel	Frequency (MHz)	Ant 4 Meas PSD (dBm/ 1MHz)	Ant 5 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margi n (dB)
Low	5530	-0.326	-0.108	2.985	11.00	-8.02
High	5610	3.172	3.622	6.603	11.00	-4.40
138	5690	3.552	3.765	6.860	11.00	-4.14

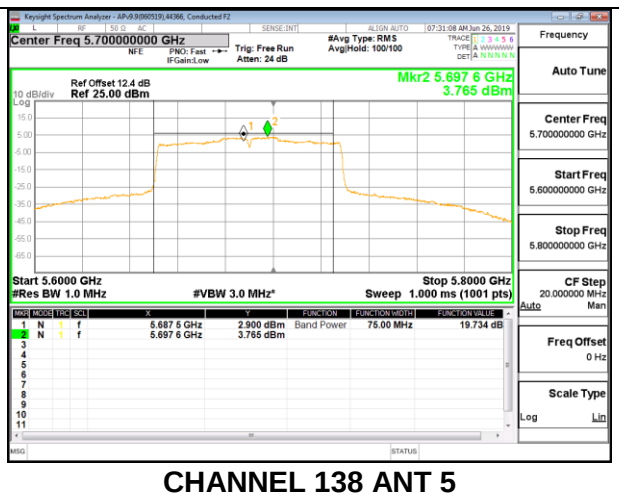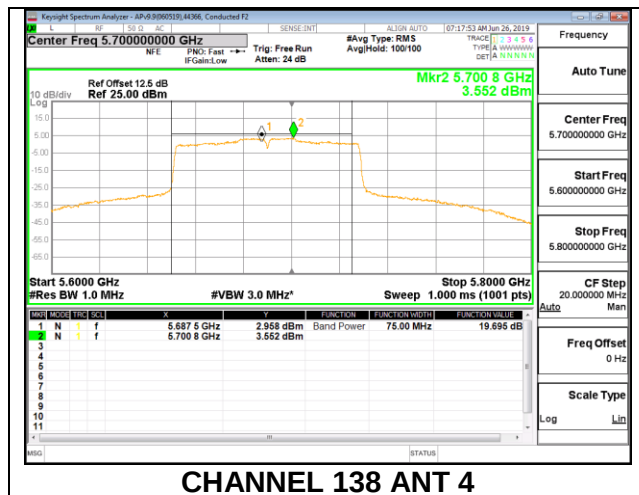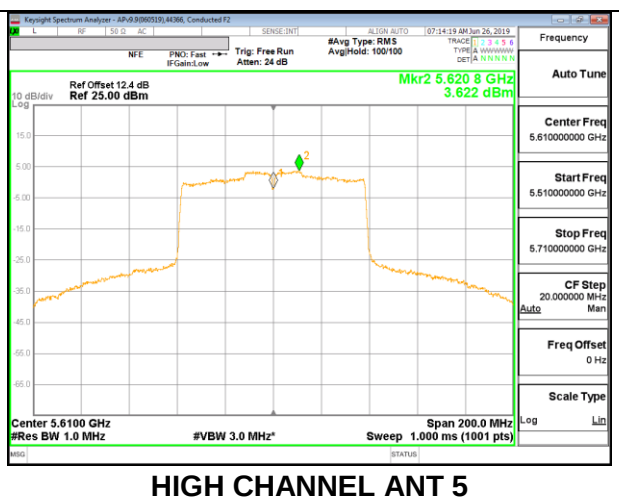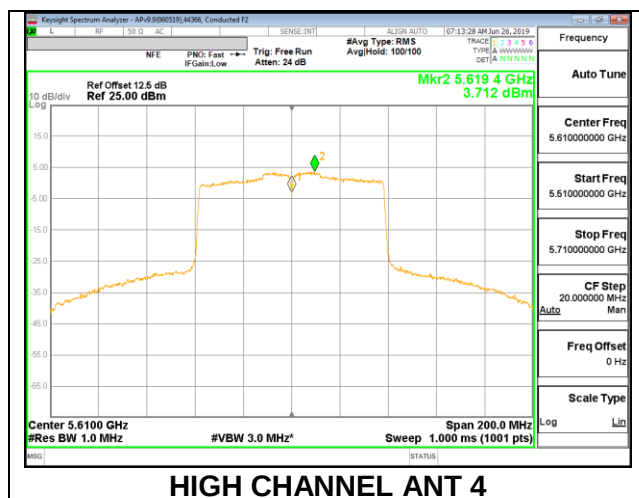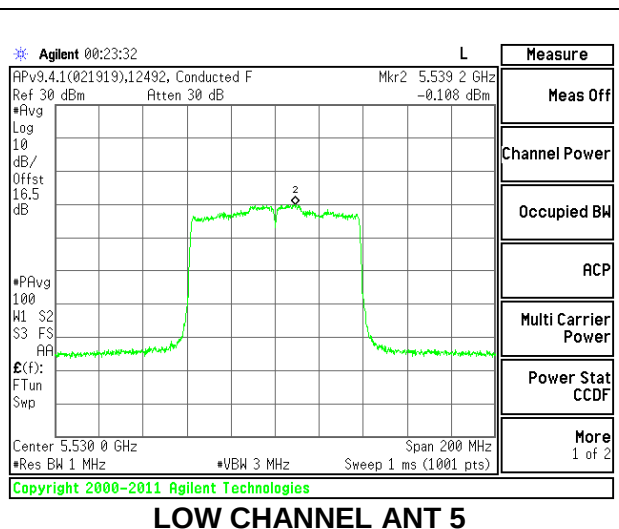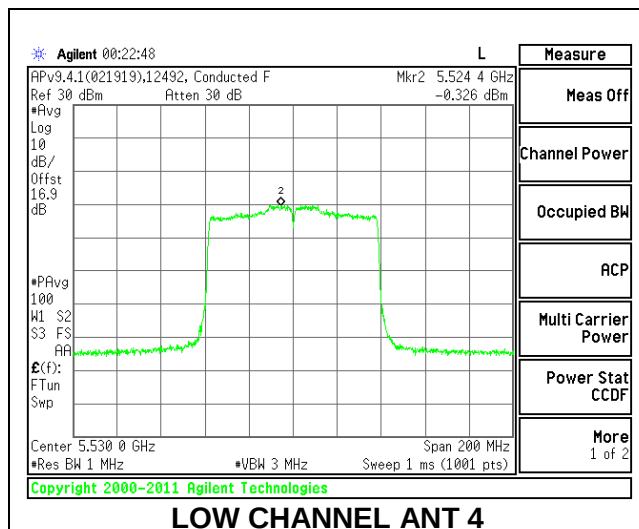

8.5.16. 802.11ax HE20 MODE IN THE 5.6 GHz BAND**1TX Antenna 4 MODE (FCC) – 242 Tones, RU Index 61****Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	21.900	19.091	-4.00
Mid	5580	21.900	18.934	-4.00
High	5700	21.950	19.015	-4.00
144	5720	15.975	14.484	-4.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/1MHz)	ISED PSD Limit (dBm/1MHz)	PSD Limit (dBm/1MHz)
Low	5500	24.00	23.81	29.81	23.81	11.00	11.00	11.00
Mid	5580	24.00	23.77	29.77	23.77	11.00	11.00	11.00
High	5700	24.00	23.79	29.79	23.79	11.00	11.00	11.00
144	5720	23.03	22.61	28.61	22.61	11.00	11.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	17.720	17.720	23.81	-6.09
Mid	5580	20.670	20.670	23.77	-3.10
High	5700	17.700	17.700	23.79	-6.09
144	5720	20.740	20.740	22.61	-1.87

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	7.860	7.860	11.00	-3.14
Mid	5580	10.248	10.248	11.00	-0.75
High	5700	7.836	7.836	11.00	-3.16
144	5720	10.272	10.272	11.00	-0.73

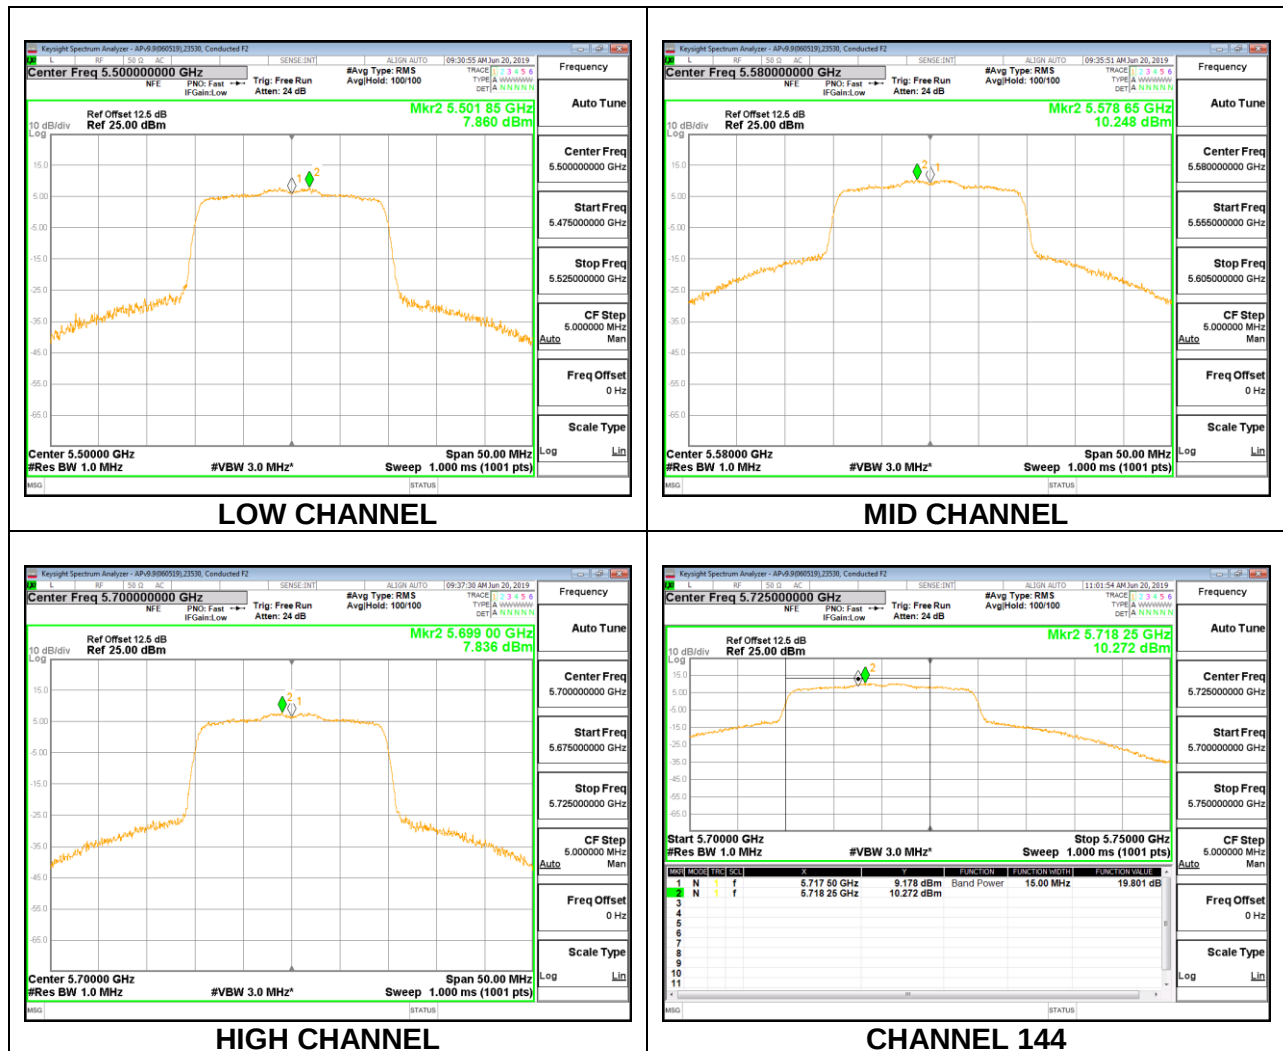

1TX Antenna 4 MODE (FCC) – 26 Tones, RU Index 0**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	20.500	18.433	-4.00
Mid	5580	20.300	18.373	-4.00
High	5700	20.450	18.307	-4.00
144	5720	15.300	14.210	-4.00

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/1MHz)	ISED PSD Limit (dBm/1MHz)	PSD Limit (dBm/1MHz)
Low	5500	24.00	23.66	29.66	23.66	11.00	11.00	11.00
Mid	5580	24.00	23.64	29.64	23.64	11.00	11.00	11.00
High	5700	24.00	23.63	29.63	23.63	11.00	11.00	11.00
144	5720	22.85	22.53	28.53	22.53	11.00	11.00	11.00

Duty Cycle CF (dB)

0.00

Included in Calculations of Corr'd Power & PSD**Output Power Results**

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	11.650	11.650	23.66	-12.01
Mid	5580	11.680	11.680	23.64	-11.96
High	5700	11.700	11.700	23.63	-11.93
144	5720	11.842	11.842	22.53	-10.68

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	9.570	9.570	11.00	-1.43
Mid	5580	9.623	9.623	11.00	-1.38
High	5700	9.780	9.780	11.00	-1.22
144	5720	9.359	9.359	11.00	-1.64