



TEST REPORT

Report Number: 14040866-E1V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, USA

Model : A2651 (Parent Model, Full Test)
A2893, A2894, A2895, A2896 (Variant Models)

FCC ID : BCG-E8141A (Parent Model)
BCG-E8154A, BCG-E8155A, BCG-E8156A
(Variant Models)

IC : 579C-E8141A (Parent Model)
579C-E8154A, 579C-E8155A, 579C-E8156A
(Variant Models)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
July 29, 2022

Prepared by:
UL LLC
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

| Rev. | Issue Date | Revisions | Revised By |
|------|------------|-------------------------------------|------------|
| V1 | 7/15/2022 | Initial Issue | Chin Pang |
| V2 | 7/29/2022 | Addressed TCB Feedback on Section 7 | Tony X. Li |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. ATTESTATION OF TEST RESULTS | 6 |
| 2. TEST SUMMARY | 8 |
| 3. TEST METHODOLOGY | 8 |
| 4. FACILITIES AND ACCREDITATION | 8 |
| 5. DECISION RULES AND MEASUREMENT UNCERTAINTY | 9 |
| 5.1. <i>METROLOGICAL TRACEABILITY</i> | 9 |
| 5.2. <i>DECISION RULES</i> | 9 |
| 5.3. <i>MEASUREMENT UNCERTAINTY</i> | 9 |
| 5.4. <i>SAMPLE CALCULATION</i> | 9 |
| 6. EQUIPMENT UNDER TEST | 10 |
| 6.1. <i>EUT DESCRIPTION</i> | 10 |
| 6.2. <i>MAXIMUM OUTPUT POWER</i> | 10 |
| 6.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> | 11 |
| 6.4. <i>SOFTWARE AND FIRMWARE</i> | 11 |
| 6.5. <i>WORST-CASE CONFIGURATION AND MODE</i> | 11 |
| 6.6. <i>DESCRIPTION OF TEST SETUP</i> | 13 |
| 7. TEST AND MEASUREMENT EQUIPMENT | 16 |
| 8. MEASUREMENT METHODS | 17 |
| 9. ANTENNA PORT TEST RESULTS | 18 |
| 9.1. <i>ON TIME AND DUTY CYCLE</i> | 18 |
| 9.2. <i>20 dB AND 99% BANDWIDTH</i> | 20 |
| 9.2.1. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION</i> | 21 |
| 9.2.2. <i>HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION</i> | 22 |
| 9.2.3. <i>HIGH POWER ENHANCED DATA RATE 8PSK MODULATION</i> | 23 |
| 9.2.4. <i>HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION</i> | 24 |
| 9.3. <i>HOPPING FREQUENCY SEPARATION</i> | 25 |
| 9.3.1. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION</i> | 26 |
| 9.4. <i>NUMBER OF HOPPING CHANNELS</i> | 27 |
| 9.4.1. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION</i> | 28 |
| 9.5. <i>AVERAGE TIME OF OCCUPANCY</i> | 30 |
| 9.5.1. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION</i> | 31 |
| 9.6. <i>OUTPUT POWER</i> | 35 |
| 9.6.1. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION</i> | 37 |
| 9.6.2. <i>HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION</i> | 37 |
| 9.6.3. <i>HIGH POWER ENHANCED DATA RATE QPSK MODULATION</i> | 38 |
| 9.6.4. <i>HIGH POWER ENHANCED DATA RATE TXBF QPSK MODULATION</i> | 38 |

| | |
|---|------------|
| 9.6.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION | 39 |
| 9.6.6. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION | 39 |
| 9.6.7. LOW POWER BASIC DATA RATE GFSK MODULATION..... | 40 |
| 9.6.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION..... | 40 |
| 9.6.9. LOW POWER ENHANCED DATA RATE QPSK MODULATION | 41 |
| 9.6.10. LOW POWER ENHANCED DATA RATE TXBF QPSK MODULATION..... | 42 |
| 9.6.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION | 43 |
| 9.6.12. LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION | 44 |
| 9.7. AVERAGE POWER..... | 45 |
| 9.7.1. HIGH POWER BASIC DATA RATE GFSK MODULATION..... | 46 |
| 9.7.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION..... | 46 |
| 9.7.3. HIGH POWER ENHANCED DATA RATE QPSK MODULATION | 47 |
| 9.7.4. HIGH POWER BASIC DATA RATE TXBF QPSK MODULATION..... | 47 |
| 9.7.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION | 48 |
| 9.7.6. HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION | 48 |
| 9.7.7. LOW POWER BASIC DATA RATE GFSK MODULATION..... | 49 |
| 9.7.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION..... | 49 |
| 9.7.9. LOW POWER ENHANCED DATA RATE QPSK MODULATION | 50 |
| 9.7.10. LOW POWER BASIC DATA RATE TXBF QPSK MODULATION..... | 50 |
| 9.7.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION | 51 |
| 9.7.12. LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION..... | 51 |
| 9.8. CONDUCTED SPURIOUS EMISSIONS..... | 52 |
| 9.8.1. HIGH POWER BASIC DATA RATE GFSK MODULATION..... | 53 |
| 9.8.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION..... | 57 |
| 9.8.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION | 61 |
| 9.8.4. HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION | 65 |
| 9.8.5. LOW POWER BASIC DATA RATE GFSK MODULATION..... | 69 |
| 9.8.6. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION..... | 73 |
| 9.8.7. LOW POWER ENHANCED DATA RATE 8PSK MODULATION | 77 |
| 9.8.8. LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION | 81 |
| 10. RADIATED TEST RESULTS | 85 |
| 10.1. <i>TRANSMITTER ABOVE 1 GHz.....</i> | 87 |
| 10.1.1. HIGH POWER BASIC DATA RATE GFSK MODULATION | 87 |
| 10.1.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION | 95 |
| 10.1.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION | 99 |
| 10.1.4. HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION | 107 |
| 10.1.5. LOW POWER BASIC DATA RATE GFSK MODULATION..... | 111 |
| 10.1.6. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION..... | 119 |
| 10.1.7. LOW POWER ENHANCED DATA RATE 8PSK MODULATION | 123 |
| 10.1.8. LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION | 131 |
| 10.1.9. GFSK TXBF HARMONICS AND SPURIOUS EMISSIONS | 135 |
| 10.1.10. 8PSK TXBF HARMONICS AND SPURIOUS EMISSIONS | 141 |
| 10.2. <i>WORST CASE BELOW 1 GHZ.....</i> | 147 |
| 10.3. <i>WORST CASE 18-26 GHZ.....</i> | 149 |
| 11. AC POWER LINE CONDUCTED EMISSIONS | 150 |
| 11.1. <i>AC Power Line With AC/DC Adapter.....</i> | 151 |
| 11.2. <i>AC Power Line With Laptop.....</i> | 153 |

12. SETUP PHOTOS 155

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: Smartphone

MODEL: A2651 (Parent Model)
A2893, A2894, A2895, A2896 (Variant Models)

BRAND: APPLE

FCC ID: BCG-E8141A (Parent Model)
BCG-E8154A, BCG-E8155A, BCG-E8156A (Variant Models)

IC: 579C-E8141A (Parent Model)
579C-E8154A, 579C-E8155A, 579C-E8156A (Variant Models)

SERIAL NUMBER: JHXP7PXL52 (Radiated), RXPYHWRP4V (Conducted)

SAMPLE RECEIPT DATE: MARCH 28, 2022

DATE TESTED: APRIL 06 – JULY 29, 2022

| APPLICABLE STANDARDS | |
|--------------------------------|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Complies |
| ISED RSS-247 Issue 2 | Complies |
| ISED RSS-GEN Issue 5 + A1 + A2 | Complies |

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For UL LLC By:



Chin Pang
Senior Lab Engineer
Consumer Technology Division
UL LLC

Prepared By:



Chris Xiong
Senior Test Engineer
Consumer Technology Division
UL LLC

2. TEST SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

| FCC Clause | ISED Clause | Requirement | Result | Comment |
|--------------------|-------------------|------------------------------|-------------------------|--------------------------------------|
| See Comment | | Duty Cycle | Reporting purposes only | Per ANSI C63.10, Section 11.6. |
| See Comment | RSS-GEN 6.7 | 20dB BW/99% OBW | Reporting purposes only | ANSI C63.10 Sections 6.9.2 and 6.9.3 |
| 15.247 (a)(1) | RSS-247 (5.1) (b) | Hopping Frequency Separation | Complies | None. |
| 15.247 (a)(1)(iii) | RSS-247 (5.1) (d) | Number of Hopping Channels | Complies | None. |
| 15.247 (a)(1)(iii) | RSS-247 (5.1) (d) | Average Time of Occupancy | Complies | None. |
| 15.247 (b)(1) | RSS-247 (5.4) (b) | Output Power | Complies | None. |
| See Comment | | Average Power | Reporting purposes only | Per ANSI C63.10, Section 11.9.2.3.2. |
| 15.247 (d) | RSS-247 (5.5) | Conducted Spurious Emissions | Complies | None. |
| 15.209, 15.205 | RSS-GEN 8.9, 8.10 | Radiated Emissions | Complies | None. |
| 15.207 | RSS-Gen 8.8 | AC Mains Conducted Emissions | Complies | None. |

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911, RSS-GEN Issue 5 + A1 + A2, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

| Location | Address | ISED CABID | ISED Company Number | FCC Registration |
|-------------------------------------|--|------------|---------------------|------------------|
| <input type="checkbox"/> | Building 1: 47173 Benicia Street, Fremont, CA 94538, USA | US0104 | 2324A | 550739 |
| <input checked="" type="checkbox"/> | Building 2: 47266 Benicia Street, Fremont, CA 94538, USA | US0104 | 22541 | 550739 |
| <input checked="" type="checkbox"/> | Building 4: 47658 Kato Rd, Fremont, CA 94538, USA | US0104 | 2324B | 550739 |

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Uncertainty figures are valid to a confidence level of 95%.

| PARAMETER | U_{Lab} |
|---|-----------|
| Worst Case Conducted Disturbance, 9KHz to 0.15 MHz | 3.78 dB |
| Worst Case Conducted Disturbance, 0.15 to 30 MHz | 3.40 dB |
| Worst Case Radiated Disturbance, 9KHz to 30 MHz | 2.87 dB |
| Worst Case Radiated Disturbance, 30 to 1000 MHz | 6.01 dB |
| Worst Case Radiated Disturbance, 1000 to 18000 MHz | 4.73 dB |
| Worst Case Radiated Disturbance, 18000 to 26000 MHz | 4.51 dB |
| Worst Case Radiated Disturbance, 26000 to 40000 MHz | 5.29 dB |

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
 $36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and MSS. All models except reference model support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

Testing was performed on the parent model and is used to support the application for the parent and variants identified in this report based on the test plan submitted and approved via KDB inquiry by the FCC and by ISED-Canada.

The Model and FCC/IC ID covered by this report includes:

Parent Model: A2651, FCC ID: BCG-E8141A, IC: 579C-E8141A

Variant Models: A2893, FCC ID: BCG-E8154A, IC: 579C-E8154A
 A2894; FCC ID: BCG-E8155A, IC: 579C-E8155A
 A2895 & A2896; FCC ID: BCG-E8156A, IC: 579C-E8156A

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

| Antenna | Config | Frequency Range (MHz) | Mode | Output Power (dBm) | Output Power (mW) |
|-------------------------------|------------|-----------------------|--------------------|--------------------|-------------------|
| ANT 4 | High Power | 2402 - 2480 | Basic GFSK | 20.07 | 101.62 |
| | | 2402 - 2480 | DQPSK | 19.25 | 84.14 |
| | | 2402 - 2480 | Enhanced 8PSK | 19.49 | 88.92 |
| | Low Power | 2402 - 2480 | Basic GFSK | 11.01 | 12.62 |
| | | 2402 - 2480 | DQPSK | 11.25 | 13.34 |
| | | 2402 - 2480 | Enhanced 8PSK | 11.47 | 14.03 |
| ANT 3 | High Power | 2402 - 2480 | Basic GFSK | 20.09 | 102.09 |
| | | 2402 - 2480 | DQPSK | 19.24 | 83.95 |
| | | 2402 - 2480 | Enhanced 8PSK | 19.51 | 89.33 |
| | Low Power | 2402 - 2480 | Basic GFSK | 11.02 | 12.65 |
| | | 2402 - 2480 | DQPSK | 11.23 | 13.27 |
| | | 2402 - 2480 | Enhanced 8PSK | 11.53 | 14.22 |
| Beamforming, ANT 4 + ANT 3 | High Power | 2402 - 2480 | Basic GFSK TxBF | 20.10 | 102.33 |
| | | 2402 - 2480 | DQPSK TxBF | 19.25 | 84.14 |
| | | 2402 - 2480 | Enhanced 8PSK TxBF | 19.48 | 88.72 |
| | Low Power | 2402 - 2480 | Basic GFSK TxBF | 14.02 | 25.23 |
| | | 2402 - 2480 | DQPSK TxBF | 14.30 | 26.92 |
| | | 2402 - 2480 | Enhanced 8PSK TxBF | 14.49 | 28.12 |

Note: GFSK, DQPSK, 8PSK Average Power are all investigated. GFSK & 8PSK Powers are the worst case. Testing is based on these modes to show compliance. For Average Power data, please refer to Section 9.7.

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain, as provided by the manufacturer' are as follow:

| Frequency Range (GHz) | ANT 4 (dBi) | ANT 3 (dBi) |
|-----------------------|-------------|-------------|
| 2.4 | -1.0 | -1.1 |

6.4. SOFTWARE AND FIRMWARE

The EUT firmware version installed for testing is 20.1.467.5699.

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on ANT 4, ANT 3 and 2TX beamforming. It was determined that Y (Landscape) was the worst-case orientation for ANT 4 and X (Flatbed) was the worst-case orientation for ANT 3 and 2TX Beamforming.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed. The EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmitting at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit

For below 1GHz tests, the EUT was connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

For simultaneous transmission of multiple channels in the 2.4GHz BT and 5GHz bands, no noticeable emission was found.

For radiated harmonic spurious emissions test, beamforming GFSK and 8PSK modes were set to maximum power per chain based on SISO power to cover both non-BF and BF modes to complies with radiated spurious emissions limits in the restricted bands between 1GHz and 18GHz low/mid/high channel.

GFSK, DQPSK, 8PSK average power are all investigated. The GFSK & 8PSK power are the worst case. For average power data please refer to section 9.7.

Worst-case data rates as provided by the client were:

GFSK Mode: DH5

8PSK Mode: 3-DH5

Beamforming Mode: GFSK(DH5), 8PSK (3-DH5)

There are three vendors of the Wi-Fi/Bluetooth radio modules: variant 1, 2 and 3. The WiFi/BT radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.



Baseline testing was performed on the three variants to determine the worst case on all conducted power and radiated emissions.



6.6. DESCRIPTION OF TEST SETUP

| SUPPORT TEST EQUIPMENT | | | | | |
|--|-------------------|----------------------|-------------------|-------------|------------------|
| Description | Manufacturer | Model | Serial Number | | FCC ID/ DoC |
| Laptop | Apple | MacBook Pro | C02VD7SAHV22 | | BCGA1708 |
| Laptop AC/DC adapter | Liteon Technology | A1424 | NSW25679 | | DoC |
| EUT AC/DC adapter | Apple | A1720 | C3D8417A7R93KVPA8 | | DoC |
| I/O CABLES (RF CONDUCTED TEST) | | | | | |
| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length (m) |
| 1 | Antenna | 1 | SMA | Un-shielded | 0.2 |
| 2 | USB | 1 | USB | Shielded | 1.0 |
| 3 | AC | 1 | AC | Un-shielded | 2 |
| I/O CABLES (RF RADIATED AND AC LINE AC TEST) | | | | | |
| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length (m) |
| 1 | AC | 1 | AC | Un-shielded | 2 |
| 2 | USB | 1 | USB | shielded | 1 |

TEST SETUP

The EUT setup is shown as below. Test software exercised the radio card.

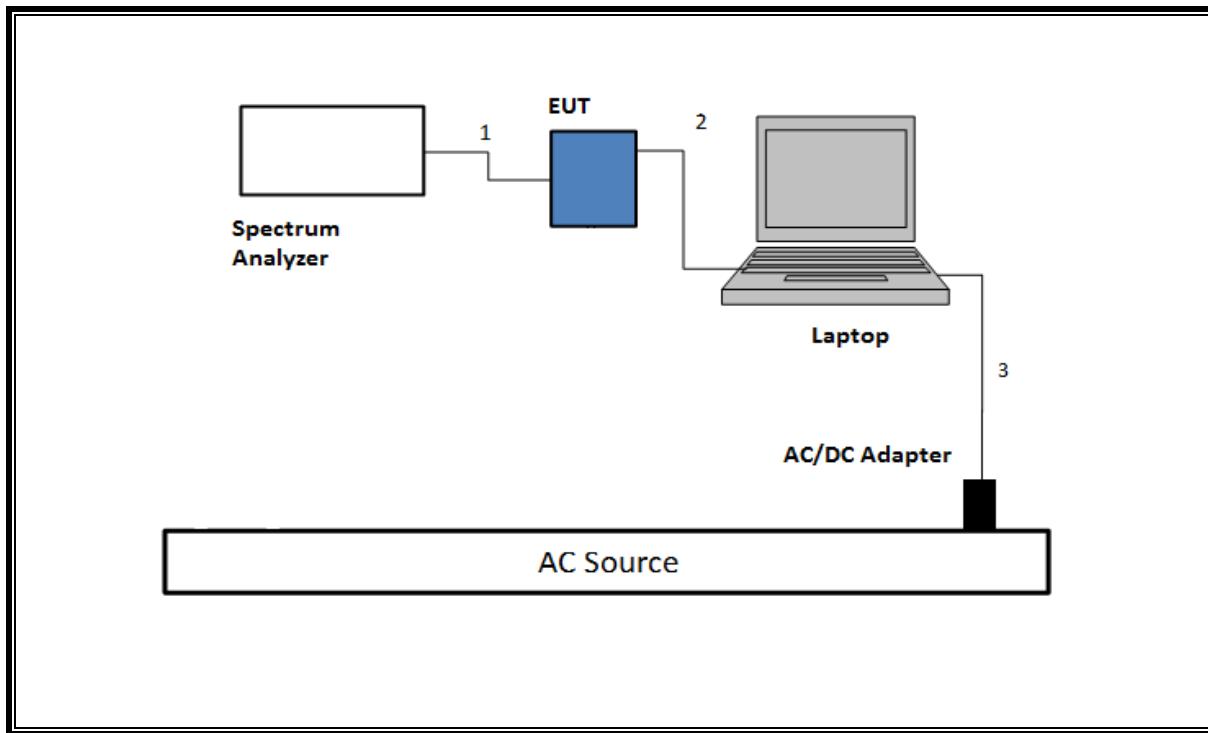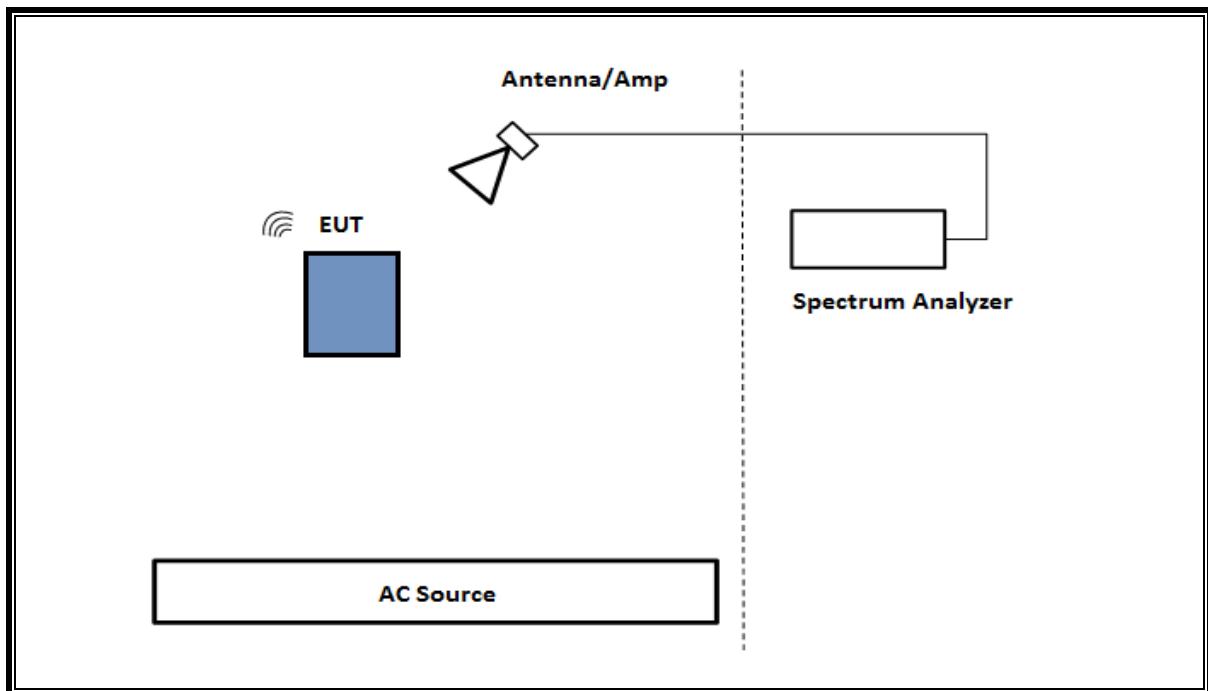SETUP DIAGRAM FOR CONDUCTED TESTS**SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz**

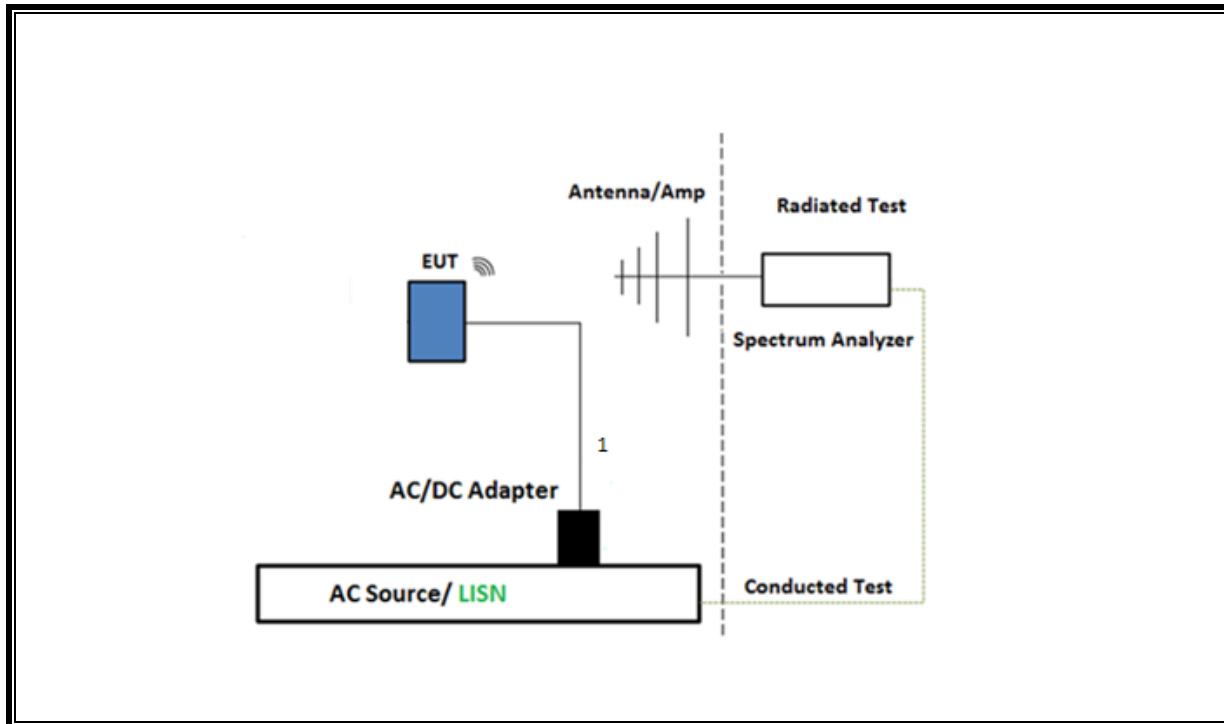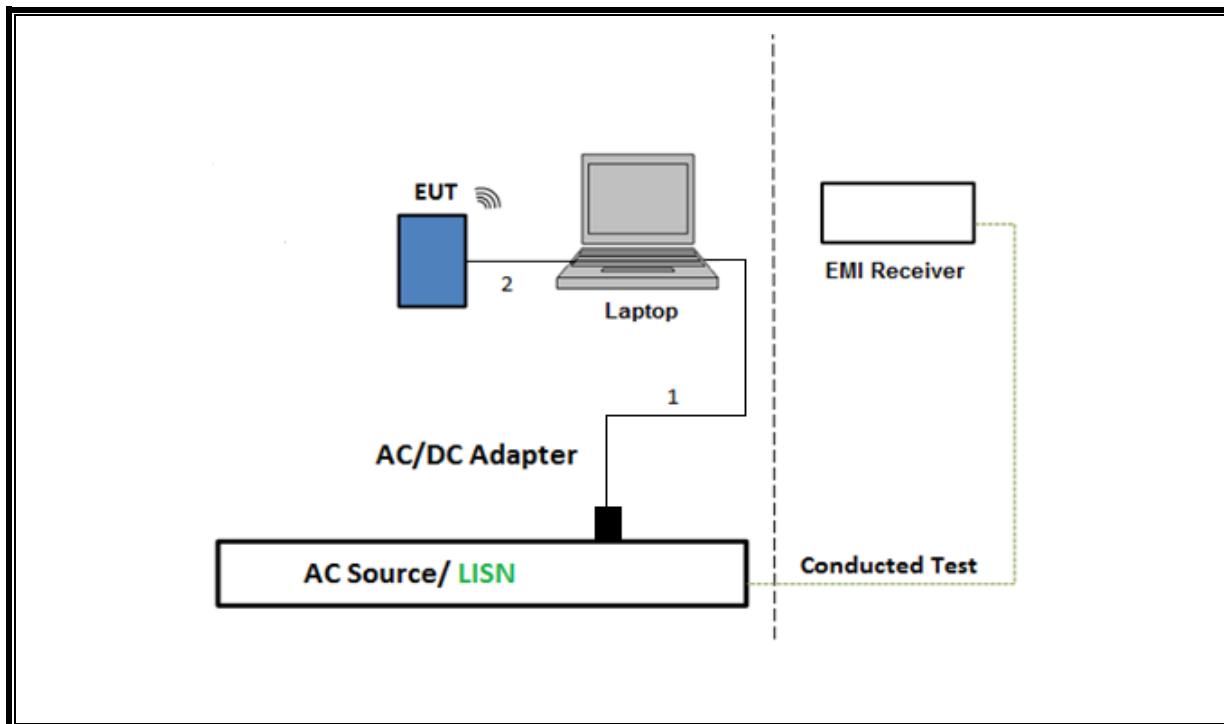SETUP DIAGRAM FOR BELOW 1GHz and AC LINE CONDUCTED TESTTEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Description | Manufacturer | Model | ID Num | Cal Due | Last Cal |
|---|-------------------------------|------------------------------|----------------------------|------------|------------|
| Antenna, Horn 1-18GHz | ETS-Lindgren | 3117 | 200786 | 2/24/2023 | 2/24/2022 |
| RF Filter Box, 1-18GHz | UL-FR1 (CTECH) | N/A | PRE0183530 | 11/17/2022 | 11/17/2021 |
| EMI TEST RECEIVER | Rohde & Schwarz | ESW44 | 191428 | 2/20/2023 | 2/20/2022 |
| Antenna, Horn 1-18GHz | ETS-Lindgren | 3117 | 200897 | 2/24/2023 | 2/24/2022 |
| *RF Filter Box | UL-FR1 (CTECH) | N/A | PRE0182865 | 4/13/2023 | 4/13/2022 |
| Spectrum Analyzer, PXA, 3Hz to 44GHz | Keysight Technologies Inc | N9030A | 125188 | 1/30/2023 | 1/30/2022 |
| Antenna, Horn 1-18GHz | ETS-Lindgren | 3117 | 81887 | 3/16/2023 | 3/16/2022 |
| Rf Filter Box | UL-FR1 (CTECH) | N/A | PRE0183207 | 10/23/2022 | 10/23/2021 |
| EMI TEST RECEIVER | Rohde & Schwarz | ESW44 | 191429 | 2/20/2023 | 2/20/2022 |
| Antenna, Horn 1-18GHz | ETS-Lindgren | 3117 | 200895 | 10/13/2022 | 10/13/2021 |
| RF Filter Box, 6 port, 1-18GHz | UL-FR1 (CTECH) | SAC 6 port rf box | 203957 | 2/12/2023 | 2/12/2022 |
| EMI TEST RECEIVER | Rohde & Schwarz | ESW44 | 201498 | 2/20/2023 | 2/20/2022 |
| Antenna, Broadband Hybrid, 30MHz to 2000MHz | Sunol Sciences Corp. | JB1 | 82258 | 10/01/2022 | 10/01/2021 |
| Amplifier, 9KHz to 1GHz, 32dB | SONOMA INSTRUMENT | 310 | 175953 | 2/08/2023 | 2/08/2022 |
| EMI TEST RECEIVER | Rohde & Schwarz | ESW44 | 169927 | 2/16/2023 | 2/16/2022 |
| Spectrum Analyzer, PXA, 3Hz to 44GHz | Agilent | N9030A | 87738 | 02/02/2023 | 02/02/2022 |
| Antenna, Horn 18 to 26.5GHz | A.R.A. | MWH-1826/B | 172363 | 12/07/2022 | 12/07/2021 |
| Amplifier 18-26.5GHz, +5Vdc, -54dBmP1dB | AMPLICAL | AMP18G26.5-60 | 172583 | 1/27/2023 | 1/27/2022 |
| Power sensor | Keysight | N1921A | 90389 | 02/03/2023 | 02/03/2022 |
| Power Meter, P-series single channel | Keysight | N1911A | PRE0177682 | 01/24/2023 | 01/24/2022 |
| Antenna, Passive Loop 30Hz to 1MHz | Electro-Metrics | EM-6871 | 170013 | 07/29/2022 | 07/29/2021 |
| Antenna, Passive Loop 100KHz to 30MHz | ETS-Lindgren | EM-6872 | 170015 | 07/29/2022 | 07/29/2021 |
| AC Line Conducted | | | | | |
| Description | Manufacturer | Model | ID Num | Cal Due | Last Cal |
| EMI Test Receiver 9kHz-7GHz | Rohde & Schwarz | ESR | T1436 | 02/21/2023 | 02/21/2022 |
| Power Cable, Line Conducted Emissions | UL | PR1 | T861 | 10/27/2022 | 10/27/2021 |
| LISN for Conducted Emissions CISPR-16 | FISCHER CUSTOM COMMUNICATIONS | FCC-LISN-50/250-25-2-01-480V | 175765 | 01/26/2023 | 01/26/2022 |
| UL AUTOMATION SOFTWARE | | | | | |
| Radiated Software | UL | UL EMC | Ver 9.5, Mar 6, 2020 | | |
| Conducted Software | UL | UL EMC | 2020.2.26 | | |
| AC Line Conducted Software | UL | UL EMC | Ver 9.5, February 21, 2020 | | |

*Equipment was set to test after calibration was done

8. MEASUREMENT METHODS

| Test Item | Test Method |
|---|--|
| On Time and Duty Cycle | <ul style="list-style-type: none">ANSI C63.10-2013 Section 11.6 |
| Occupied BW (20dB) | <ul style="list-style-type: none">ANSI C63.10-2013 Section 6.9.2 |
| Occupied BW (99%) | <ul style="list-style-type: none">ANSI C63.10-2013 Section 6.9.3 |
| Carrier Frequency Separation | <ul style="list-style-type: none">ANSI C63.10-2013 Section 7.8.2 |
| Number of Hopping Frequencies | <ul style="list-style-type: none">ANSI C63.10-2013 Section 7.8.3 |
| Time of Occupancy (Dwell Time) | <ul style="list-style-type: none">ANSI C63.10-2013 Section 7.8.4 |
| Peak Output Power | <ul style="list-style-type: none">ANSI C63.10-2013 Section 7.8.5 |
| Conducted Spurious Emissions | <ul style="list-style-type: none">ANSI C63.10-2013 Section 7.8.8 |
| Conducted Band-Edge | <ul style="list-style-type: none">ANSI C63.10-2013 Section 6.10.4 |
| Radiated Spurious Emissions Below 30MHz | <ul style="list-style-type: none">ANSI C63.10-2013 Section 6.4 & 13 |
| Radiated Spurious Emissions 30-1000MHz | <ul style="list-style-type: none">ANSI C63.10-2013 Section 6.3, 6.5 & 13 |
| Radiated Spurious Emissions Above 1GHz | <ul style="list-style-type: none">ANSI C63.10-2013 Section 6.3, 6.6 & 13 |
| Radiated Band-Edge | <ul style="list-style-type: none">ANSI C63.10-2013 Section 6.10.5 & 13 |
| AC Power-Line Conducted Emissions | <ul style="list-style-type: none">ANSI C63.10-2013, Section 6.2 |

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

ANSI C63.10, Section 11.6: Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

| Mode | ON Time B (msec) | Period (msec) | Duty Cycle x (linear) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | 1/T Minimum VBW (kHz) |
|---------------------|------------------|---------------|-----------------------|----------------|-----------------------------------|-----------------------|
| Bluetooth GFSK | 1.00 | 1.00 | 1.000 | 100.0% | 0.00 | 0.010 |
| Bluetooth 8PSK | 1.00 | 1.00 | 1.000 | 100.0% | 0.00 | 0.010 |
| Bluetooth GFSK TxBF | 1.00 | 1.00 | 1.000 | 100.0% | 0.00 | 0.010 |
| Bluetooth 8PSK TxBF | 1.00 | 1.00 | 1.000 | 100.0% | 0.00 | 0.010 |

DUTY CYCLE PLOTS

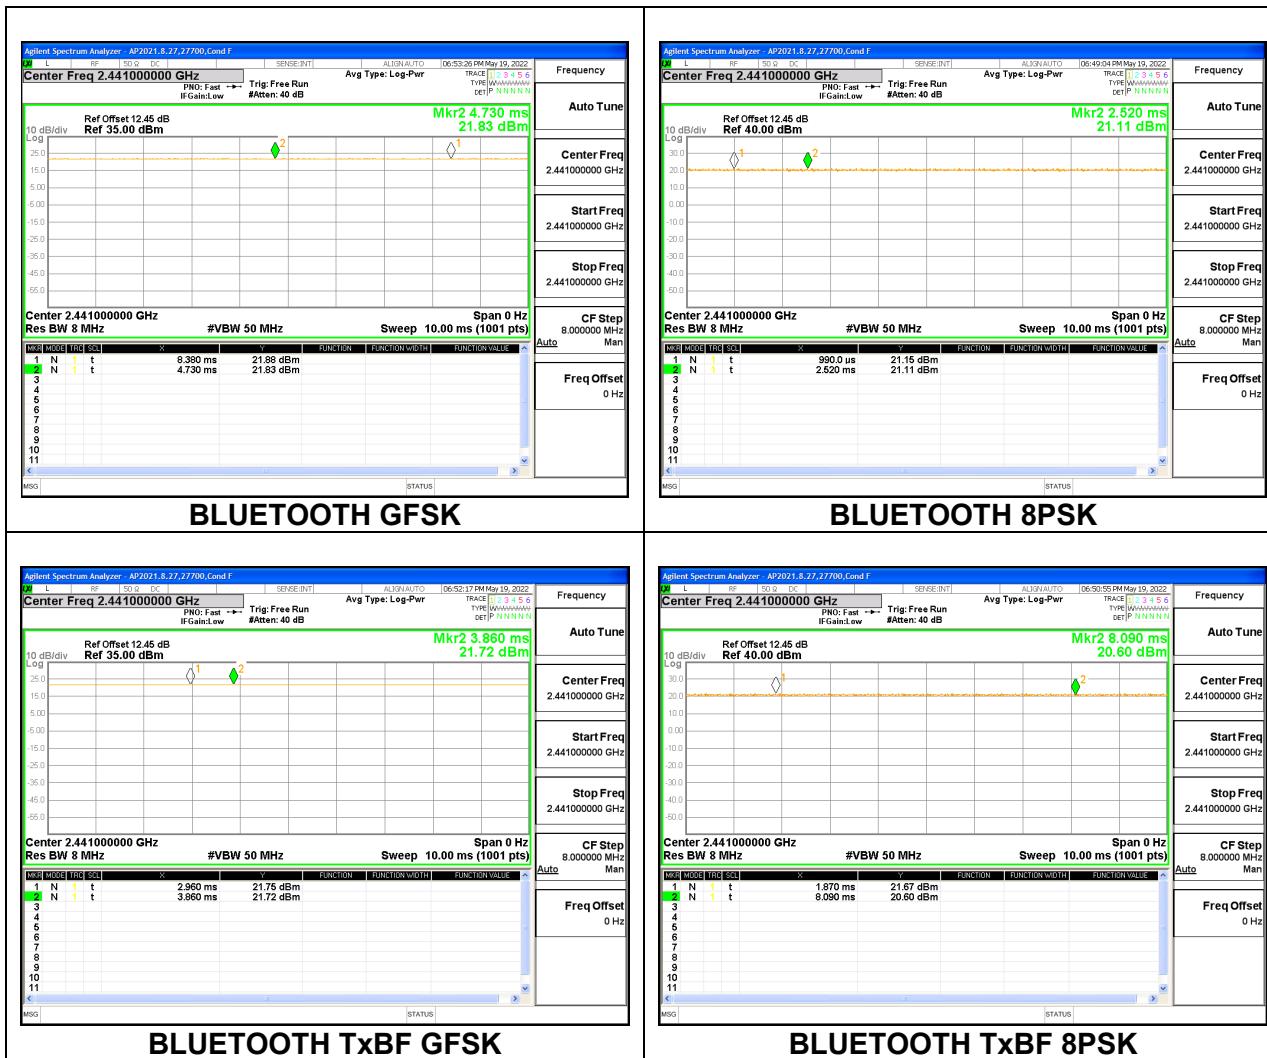

9.2. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq 3 \times \text{RBW}$. The sweep time is coupled.


RESULTS

Only High Power modes result is reported, it covers all Low Power modes. Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

9.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION


ANT 4

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low | 2402 | .8840 | .86484 |
| Mid | 2441 | .9254 | .86869 |
| High | 2480 | .8891 | .86574 |

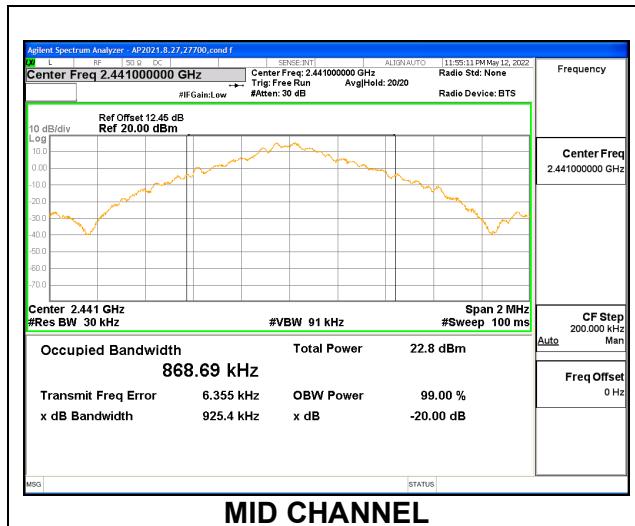

ANT 3


| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low | 2402 | .9230 | .86602 |
| Mid | 2441 | .8892 | .86448 |
| High | 2480 | .8872 | .86572 |

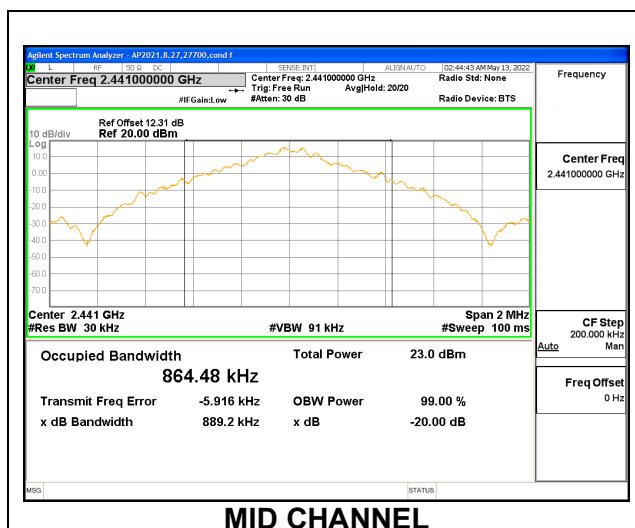

9.2.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

Note: Test procedure on beamforming mode is the same as BT basic and EDR mode


| Channel | Frequency (MHz) | 20dB Bandwidth ANT 4 (MHz) | 20dB Bandwidth ANT 3 (MHz) | 99% Bandwidth ANT 4 (MHz) | 99% Bandwidth ANT 3 (MHz) |
|---------|--------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|
| Low | 2402 | .9245 | .8890 | .87143 | .86549 |
| Mid | 2441 | .8877 | .8871 | .86492 | .86475 |
| High | 2480 | .8876 | .8879 | .86391 | .86565 |

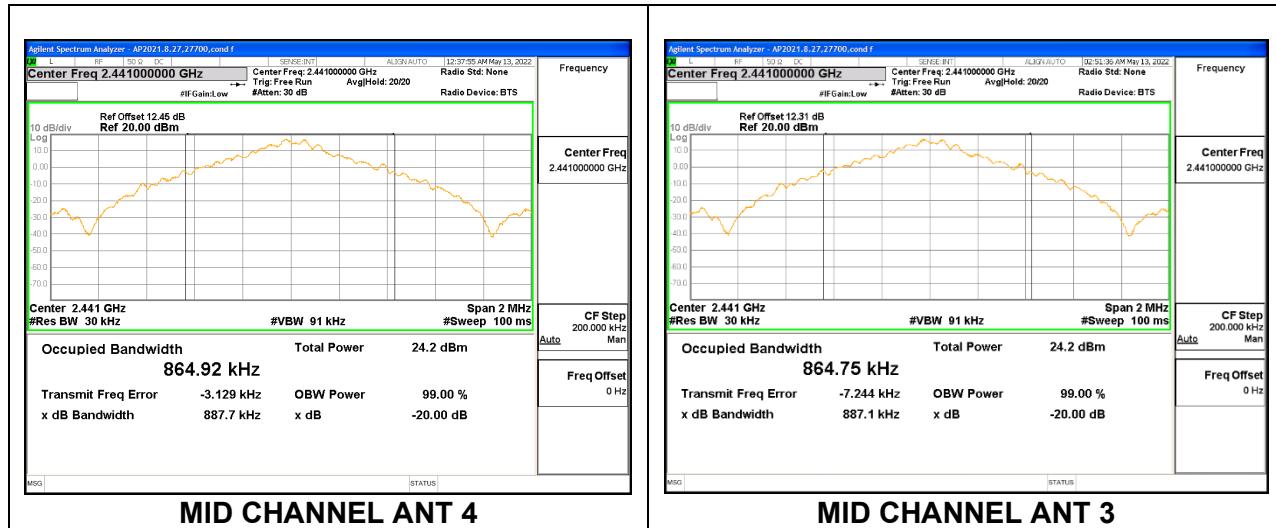

9.2.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION


ANT 4

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low | 2402 | 1.369 | 1.2149 |
| Mid | 2441 | 1.369 | 1.2132 |
| High | 2480 | 1.371 | 1.2170 |

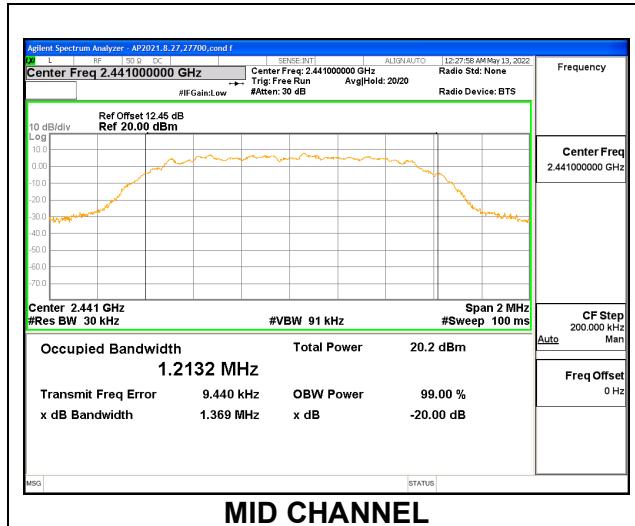

ANT 3

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low | 2402 | 1.367 | 1.2091 |
| Mid | 2441 | 1.361 | 1.2080 |
| High | 2480 | 1.368 | 1.2136 |

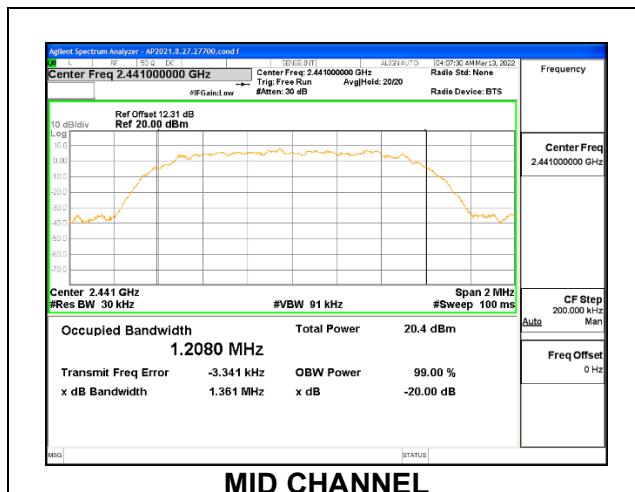

9.2.4. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

Note: Test procedure on beamforming mode is the same as BT basic and EDR mode

| Channel | Frequency (MHz) | 20dB Bandwidth ANT 4 (MHz) | 20dB Bandwidth ANT 3 (MHz) | 99% Bandwidth ANT 4 (MHz) | 99% Bandwidth ANT 3 (MHz) |
|---------|-----------------|----------------------------|----------------------------|---------------------------|---------------------------|
| Low | 2402 | 1.370 | 1.367 | 1.2103 | 1.2104 |
| Mid | 2441 | 1.369 | 1.388 | 1.2102 | 1.2287 |
| High | 2480 | 1.370 | 1.366 | 1.2142 | 1.2113 |



9.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to VBW \geq 3xRBW. The sweep time is coupled.

RESULTS

Only High Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same channel plan.

9.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

HOPPING FREQUENCY SEPARATION

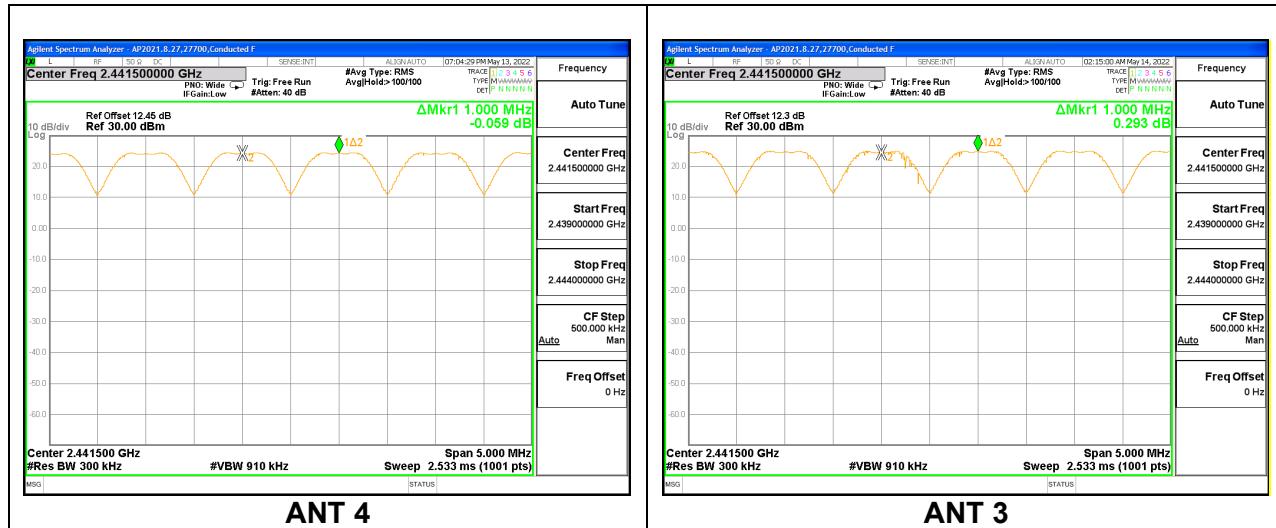

9.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.



RESULTS

Normal Mode: 79 Channels Observed. Only High Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same channel plan.

9.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

ANT 4

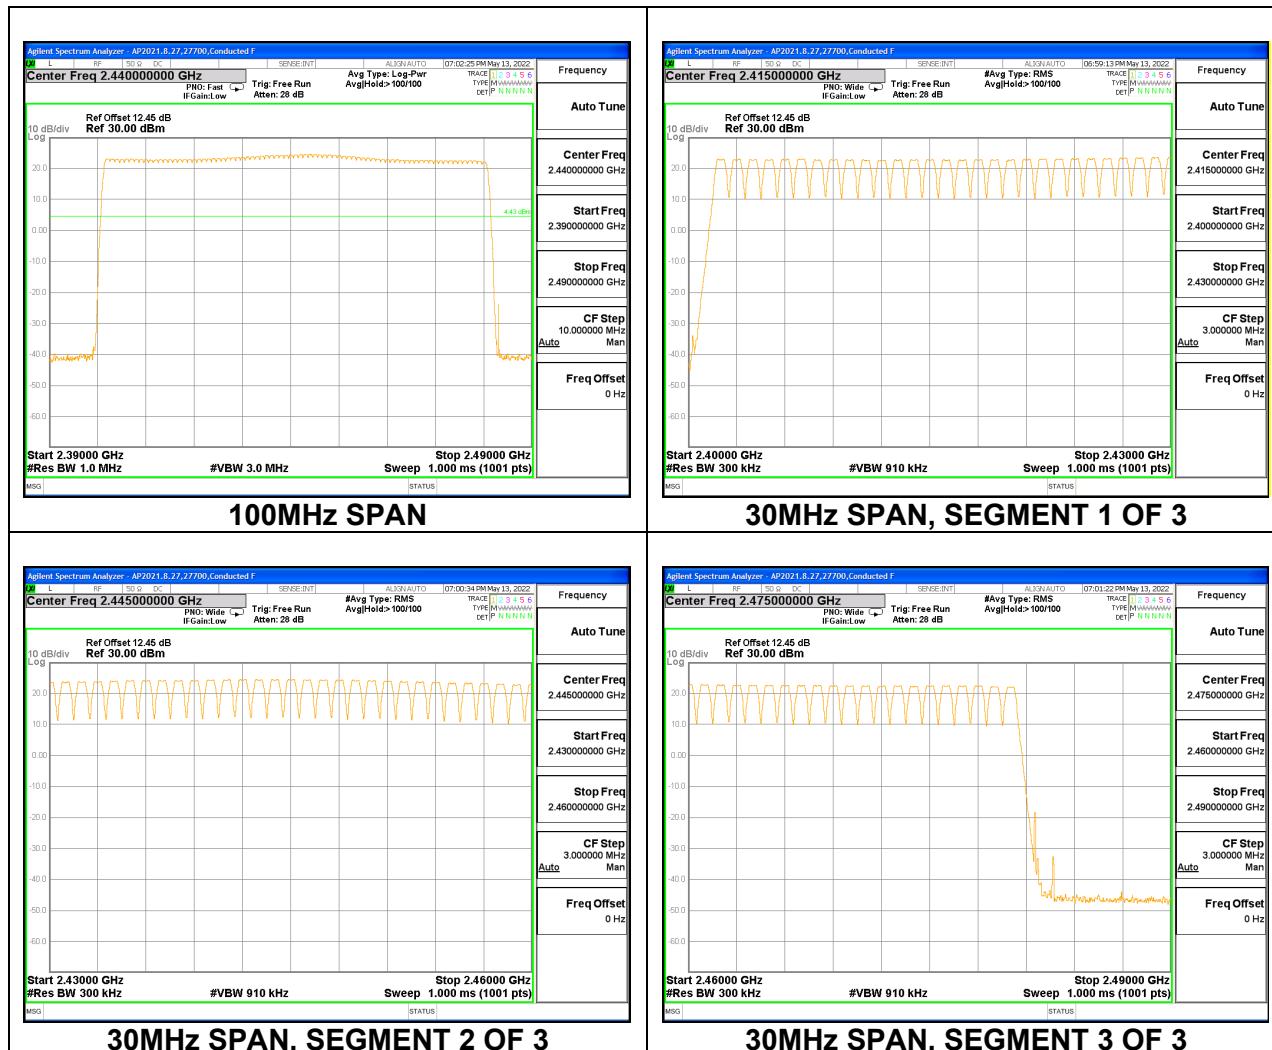

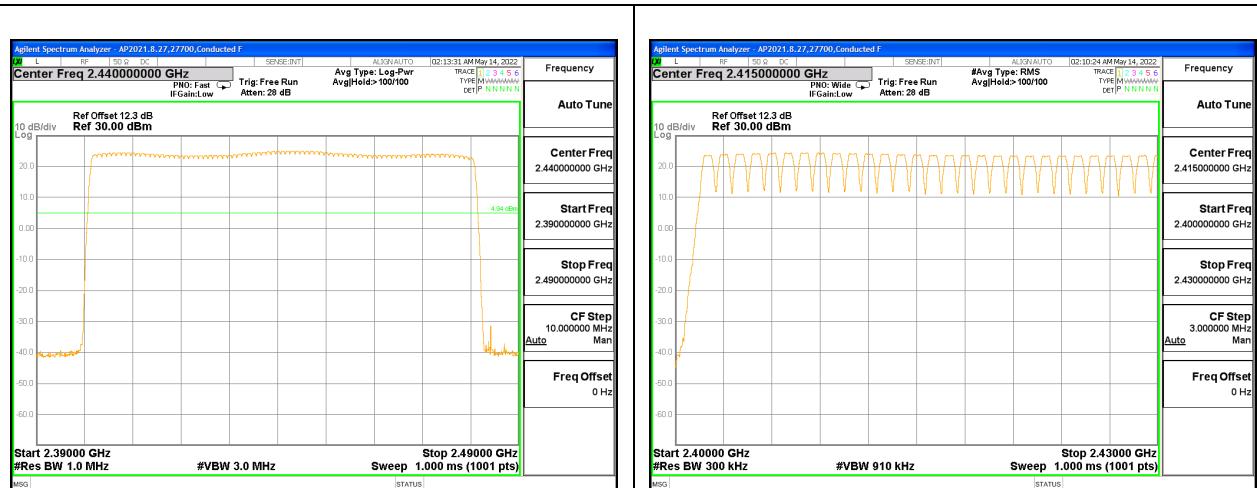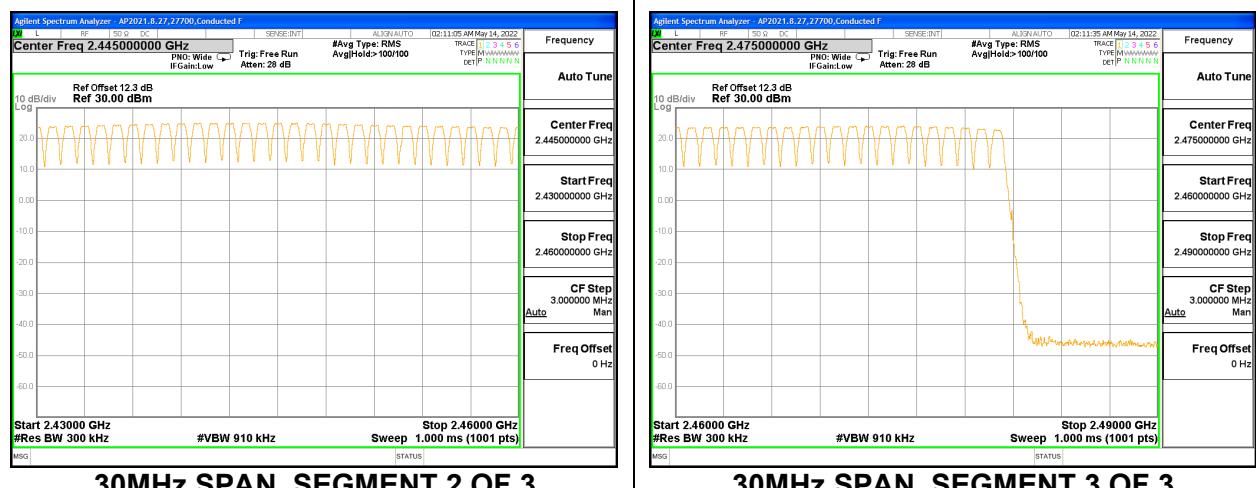ANT 3**100MHz SPAN****30MHz SPAN, SEGMENT 1 OF 3****30MHz SPAN, SEGMENT 2 OF 3****30MHz SPAN, SEGMENT 3 OF 3**

9.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

Only High Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same timing.

9.5.1. HIGH POWER BASIC DATA RATE GFSK MODULATION


ANT 4

| DH Packet | Pulse Width (msec) | Number of Pulses in 3.16 seconds | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
|------------------|--------------------|----------------------------------|---------------------------------|-------------|--------------|
| GFSK Normal Mode | | | | | |
| DH1 | 0.378 | 32 | 0.121 | 0.4 | -0.279 |
| DH3 | 1.632 | 15 | 0.245 | 0.4 | -0.155 |
| DH5 | 2.872 | 10 | 0.287 | 0.4 | -0.113 |
| GFSK AFH Mode | | | | | |
| DH Packet | Pulse Width (sec) | Number of Pulses in 0.8 seconds | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
| DH1 | 0.378 | 8 | 0.030 | 0.4 | -0.370 |
| DH3 | 1.632 | 3.75 | 0.061 | 0.4 | -0.339 |
| DH5 | 2.872 | 2.5 | 0.072 | 0.4 | -0.328 |

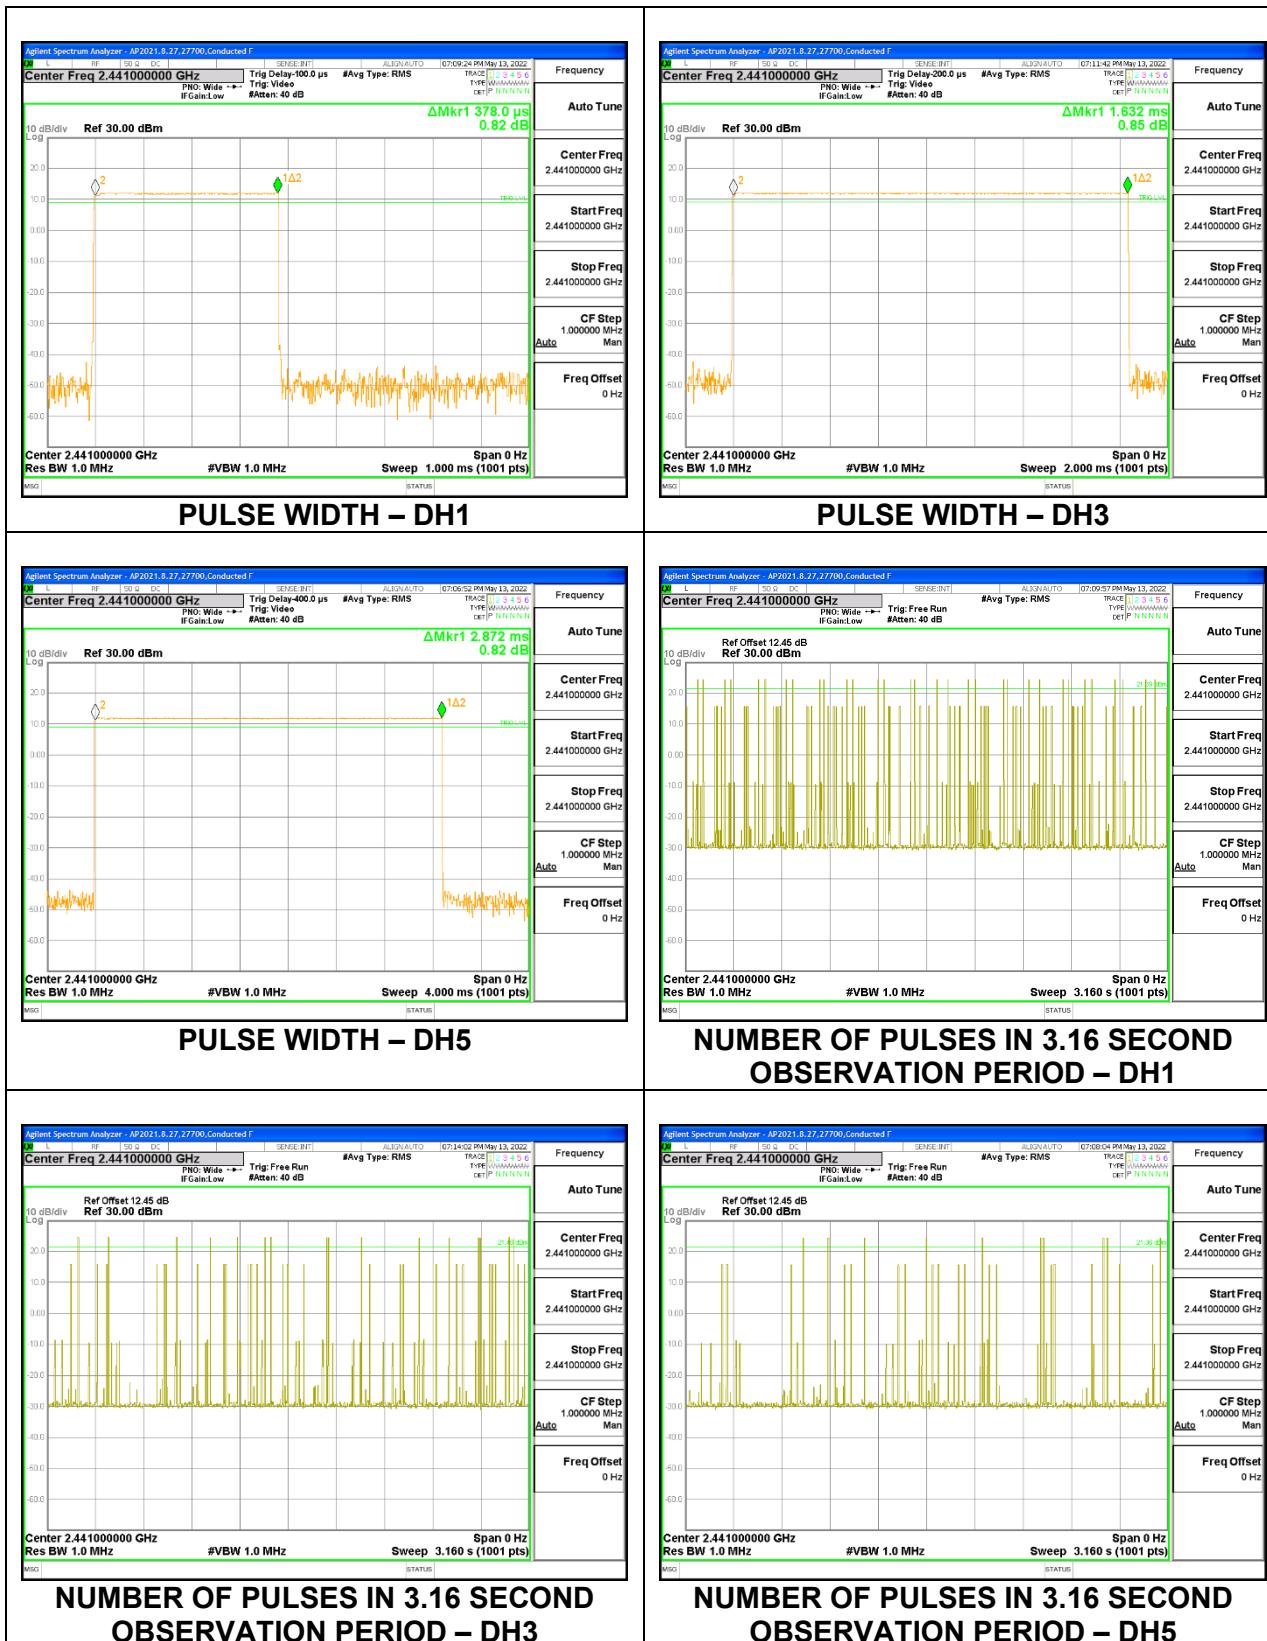

ANT 3

| DH Packet | Pulse Width (msec) | Number of Pulses in 3.16 seconds | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
|------------------------|--------------------|----------------------------------|---------------------------------|-------------|--------------|
| FSK Normal Mode | | | | | |
| DH1 | 0.378 | 31 | 0.117 | 0.4 | -0.283 |
| DH3 | 1.630 | 15 | 0.245 | 0.4 | -0.156 |
| DH5 | 2.872 | 10 | 0.287 | 0.4 | -0.113 |
| DH Packet | Pulse Width (sec) | Number of Pulses in 0.8 seconds | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
| FSK AFH Mode | | | | | |
| DH1 | 0.378 | 7.75 | 0.029 | 0.4 | -0.371 |
| DH3 | 1.63 | 3.75 | 0.061 | 0.4 | -0.339 |
| DH5 | 2.872 | 2.5 | 0.072 | 0.4 | -0.328 |

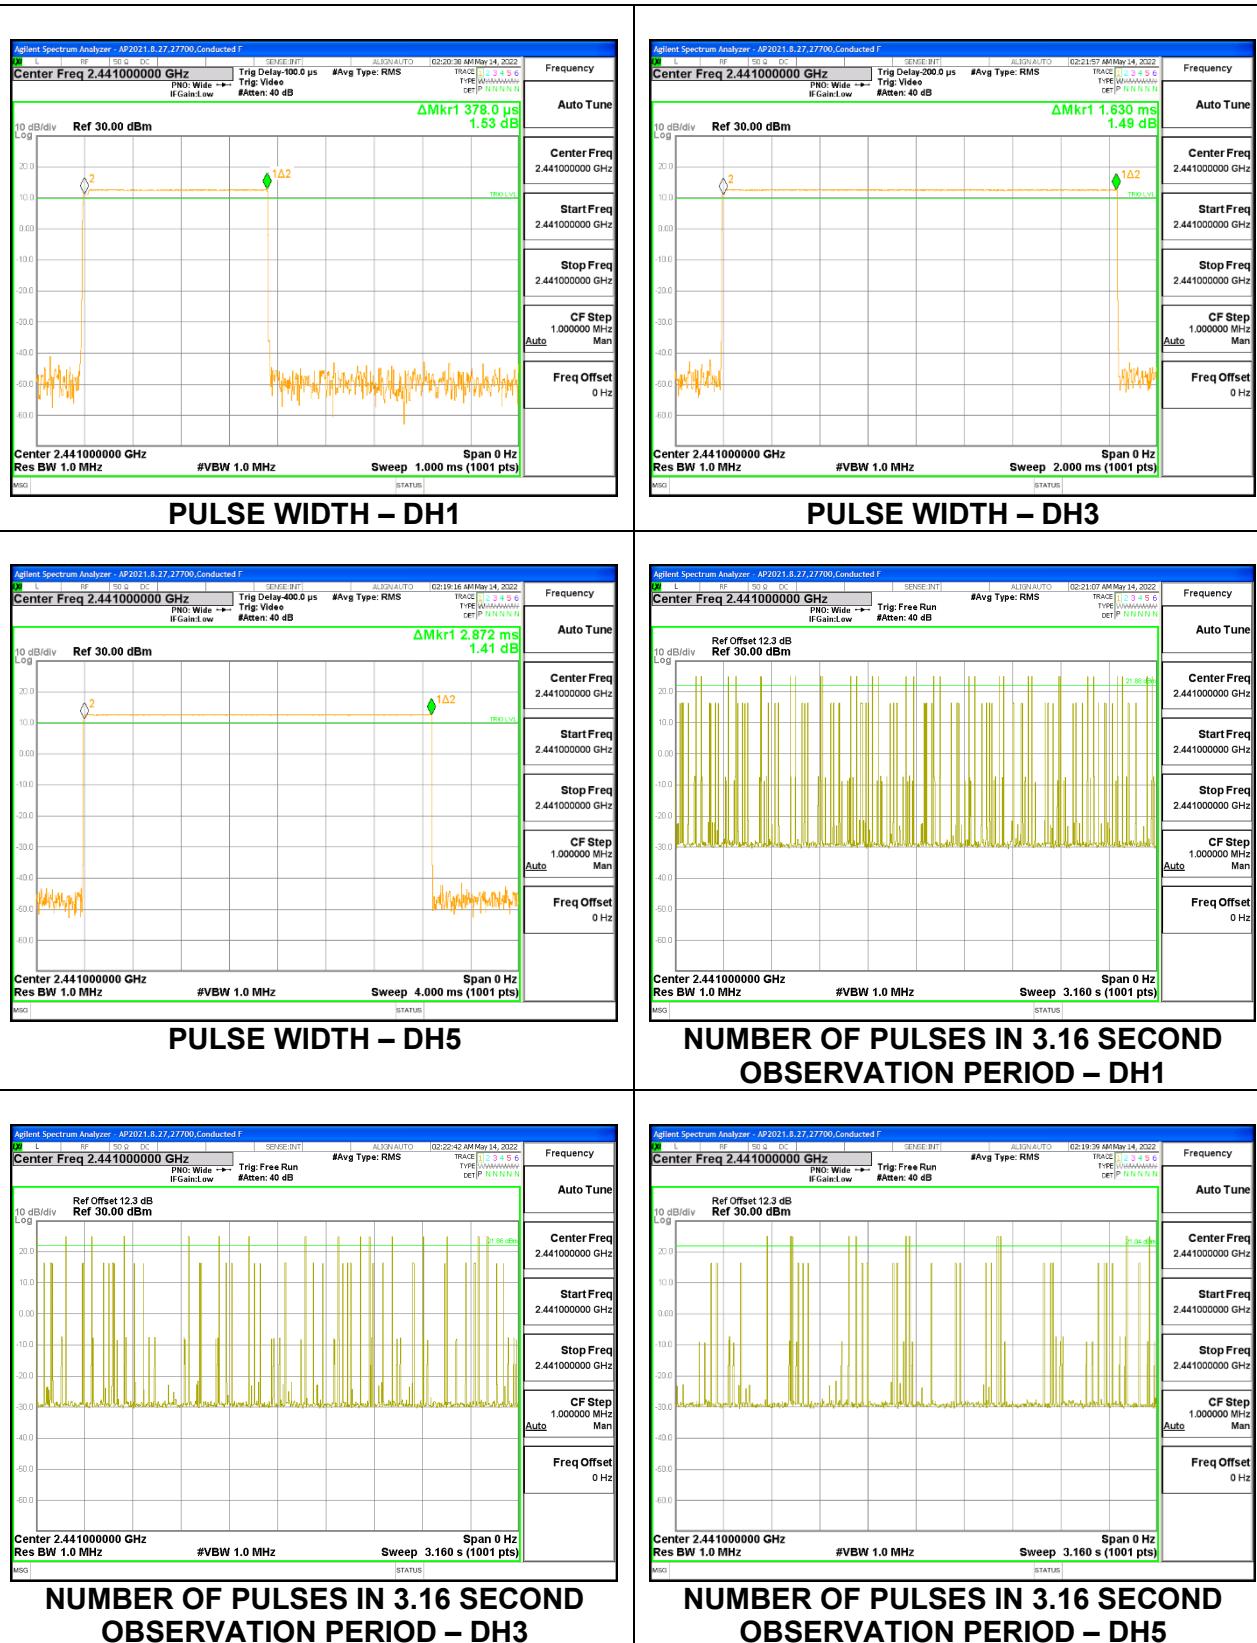

9.6. OUTPUT POWER

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

TEST PROCEDURE

Measurements were performed using a power meter with wideband peak power sensor.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband peak power sensor. Peak output power was read directly from the power meter.

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power due to the device supporting Beamforming. The directional gains are as follows:

| Band (GHz) | ANT 4 Gain (dBi) | ANT 3 Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|------------|---------------------|---------------------|--|
| 2.4 | -1.00 | -1.10 | 1.96 |

DIRECTIONAL GAIN CALCULATION:

ANSI C63.10-2013 section 14.4.3

Uncorrelated directional gain= $10 \cdot \log((10^{(Ant1/10)} + 10^{(Ant2/10)})/2)$

Correlated directional Gain= $10 \cdot \log(((10^{(Ant1/20)} + 10^{(Ant2/20)})^2)/2)$

Sample Calculation:

Ant1=-1.0, Ant2=-1.1

Uncorrelated Antenna gain= $10 \log[(10^{(-1.0/10)} + 10^{(-1.1/10)})/2] = -1.05 \text{ dBi}$

Correlated Antenna gain= $10 \log[(10^{(-1.0/20)} + 10^{(-1.1/20)})^2/2] = 1.96 \text{ dBi}$

RESULTS

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 20.06 | 21 | -0.94 |
| Middle | 2441 | 20.07 | 21 | -0.93 |
| High | 2480 | 20.03 | 21 | -0.97 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 20.04 | 21 | -0.96 |
| Middle | 2441 | 20.09 | 21 | -0.91 |
| High | 2480 | 20.03 | 21 | -0.97 |

9.6.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATIONANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power ANT 4 (dBm) | Output Power ANT 3 (dBm) | Total Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------------|--------------------------|-------------------|-------------|-------------|
| Low | 2402 | 17.02 | 17.02 | 20.03 | 21 | -0.97 |
| Middle | 2441 | 17.10 | 17.07 | 20.10 | 21 | -0.90 |
| High | 2480 | 17.00 | 17.03 | 20.03 | 21 | -0.97 |

9.6.3. HIGH POWER ENHANCED DATA RATE QPSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 19.20 | 21 | -1.80 |
| Middle | 2441 | 19.25 | 21 | -1.75 |
| High | 2480 | 19.22 | 21 | -1.78 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 19.18 | 21 | -1.82 |
| Middle | 2441 | 19.24 | 21 | -1.76 |
| High | 2480 | 19.21 | 21 | -1.79 |

9.6.4. HIGH POWER ENHANCED DATA RATE TXBF QPSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power ANT 4 (dBm) | Output Power ANT 3 (dBm) | Total Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------------|--------------------------|-------------------|-------------|-------------|
| Low | 2402 | 16.22 | 16.21 | 19.23 | 21 | -1.77 |
| Middle | 2441 | 16.25 | 16.23 | 19.25 | 21 | -1.75 |
| High | 2480 | 16.19 | 16.20 | 19.21 | 21 | -1.79 |

9.6.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 19.44 | 21 | -1.56 |
| Middle | 2441 | 19.49 | 21 | -1.51 |
| High | 2480 | 19.48 | 21 | -1.52 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 19.47 | 21 | -1.53 |
| Middle | 2441 | 19.51 | 21 | -1.49 |
| High | 2480 | 19.43 | 21 | -1.57 |

9.6.6. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power ANT 4 (dBm) | Output Power ANT 3 (dBm) | Total Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------------|--------------------------|-------------------|-------------|-------------|
| Low | 2402 | 16.41 | 16.42 | 19.43 | 21 | -1.57 |
| Middle | 2441 | 16.46 | 16.47 | 19.48 | 21 | -1.52 |
| High | 2480 | 16.43 | 16.39 | 19.42 | 21 | -1.58 |

9.6.7. LOW POWER BASIC DATA RATE GFSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 10.91 | 21 | -10.09 |
| Middle | 2441 | 11.01 | 21 | -9.99 |
| High | 2480 | 10.93 | 21 | -10.07 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 10.97 | 21 | -10.03 |
| Middle | 2441 | 11.02 | 21 | -9.98 |
| High | 2480 | 10.92 | 21 | -10.08 |

9.6.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power ANT 4 (dBm) | Output Power ANT 3 (dBm) | Total Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------------|--------------------------|-------------------|-------------|-------------|
| Low | 2402 | 10.97 | 10.99 | 13.99 | 21 | -7.01 |
| Middle | 2441 | 11.05 | 10.96 | 14.02 | 21 | -6.98 |
| High | 2480 | 10.96 | 10.91 | 13.95 | 21 | -7.05 |

9.6.9. LOW POWER ENHANCED DATA RATE QPSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 11.22 | 21 | -9.78 |
| Middle | 2441 | 11.25 | 21 | -9.75 |
| High | 2480 | 11.19 | 21 | -9.81 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 11.2 | 21 | -9.8 |
| Middle | 2441 | 11.23 | 21 | -9.77 |
| High | 2480 | 11.18 | 21 | -9.82 |

9.6.10. LOW POWER ENHANCED DATA RATE TXBF QPSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power ANT 4 (dBm) | Output Power ANT 3 (dBm) | Total Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|--------------------------------|--------------------------------|----------------------|----------------|----------------|
| Low | 2402 | 11.23 | 11.27 | 14.26 | 21 | -6.74 |
| Middle | 2441 | 11.27 | 11.30 | 14.30 | 21 | -6.70 |
| High | 2480 | 11.25 | 11.22 | 14.25 | 21 | -6.75 |

9.6.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 11.42 | 21 | -9.58 |
| Middle | 2441 | 11.47 | 21 | -9.53 |
| High | 2480 | 11.45 | 21 | -9.55 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low | 2402 | 11.46 | 21 | -9.54 |
| Middle | 2441 | 11.53 | 21 | -9.47 |
| High | 2480 | 11.44 | 21 | -9.56 |

9.6.12. LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Output Power ANT 4 (dBm) | Output Power ANT 3 (dBm) | Total Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|--------------------------------|--------------------------------|----------------------|----------------|----------------|
| Low | 2402 | 11.41 | 11.37 | 14.40 | 21 | -6.60 |
| Middle | 2441 | 11.46 | 11.49 | 14.49 | 21 | -6.51 |
| High | 2480 | 11.39 | 11.41 | 14.41 | 21 | -6.59 |

9.7. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements was performed using a power meter with wideband average power sensor.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

RESULTS

9.7.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 19.70 |
| Middle | 2441 | 19.72 |
| High | 2480 | 19.69 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 19.71 |
| Middle | 2441 | 19.73 |
| High | 2480 | 19.68 |

9.7.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power ANT 4 (dBm) | Average Power ANT 3 (dBm) | Total Power (dBm) |
|---------|-----------------|---------------------------|---------------------------|-------------------|
| Low | 2402 | 16.70 | 16.69 | 19.71 |
| Middle | 2441 | 16.73 | 16.72 | 19.74 |
| High | 2480 | 16.69 | 16.70 | 19.71 |

9.7.3. HIGH POWER ENHANCED DATA RATE QPSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 16.19 |
| Middle | 2441 | 16.21 |
| High | 2480 | 16.20 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 16.18 |
| Middle | 2441 | 16.22 |
| High | 2480 | 16.20 |

9.7.4. HIGH POWER BASIC DATA RATE TXBF QPSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power ANT 4 (dBm) | Average Power ANT 3 (dBm) | Total Power (dBm) |
|---------|-----------------|---------------------------|---------------------------|-------------------|
| Low | 2402 | 13.18 | 13.19 | 16.20 |
| Middle | 2441 | 13.19 | 13.20 | 16.21 |
| High | 2480 | 13.16 | 13.17 | 16.18 |

9.7.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 16.20 |
| Middle | 2441 | 16.23 |
| High | 2480 | 16.21 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 16.21 |
| Middle | 2441 | 16.22 |
| High | 2480 | 16.19 |

9.7.6. HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power ANT 4 (dBm) | Average Power ANT 3 (dBm) | Total Power (dBm) |
|---------|-----------------|---------------------------------|---------------------------------|----------------------|
| Low | 2402 | 13.20 | 13.21 | 16.22 |
| Middle | 2441 | 13.23 | 13.22 | 16.24 |
| High | 2480 | 13.21 | 13.20 | 16.22 |

9.7.7. LOW POWER BASIC DATA RATE GFSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 10.70 |
| Middle | 2441 | 10.74 |
| High | 2480 | 10.72 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 10.71 |
| Middle | 2441 | 10.73 |
| High | 2480 | 10.69 |

9.7.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power ANT 4 (dBm) | Average Power ANT 3 (dBm) | Total Power (dBm) |
|---------|-----------------|---------------------------------|---------------------------------|----------------------|
| Low | 2402 | 10.69 | 10.71 | 13.71 |
| Middle | 2441 | 10.72 | 10.71 | 13.73 |
| High | 2480 | 10.70 | 10.68 | 13.70 |

9.7.9. LOW POWER ENHANCED DATA RATE QPSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 8.19 |
| Middle | 2441 | 8.20 |
| High | 2480 | 8.18 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 8.20 |
| Middle | 2441 | 8.21 |
| High | 2480 | 8.19 |

9.7.10. LOW POWER BASIC DATA RATE TXBF QPSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power ANT 4 (dBm) | Average Power ANT 3 (dBm) | Total Power (dBm) |
|---------|-----------------|---------------------------|---------------------------|-------------------|
| Low | 2402 | 8.18 | 8.21 | 11.21 |
| Middle | 2441 | 8.20 | 8.22 | 11.22 |
| High | 2480 | 8.20 | 8.18 | 11.20 |

9.7.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 8.20 |
| Middle | 2441 | 8.23 |
| High | 2480 | 8.22 |

ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low | 2402 | 8.21 |
| Middle | 2441 | 8.24 |
| High | 2480 | 8.20 |

9.7.12. LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION

ANT 4 + ANT 3

| | |
|------------|-----------|
| Tested By: | 26118 |
| Date: | 7/14/2022 |

| Channel | Frequency (MHz) | Average Power ANT 4 (dBm) | Average Power ANT 3 (dBm) | Total Power (dBm) |
|---------|-----------------|---------------------------|---------------------------|-------------------|
| Low | 2402 | 8.21 | 8.19 | 11.21 |
| Middle | 2441 | 8.25 | 8.23 | 11.25 |
| High | 2480 | 8.20 | 8.21 | 11.22 |

9.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 5.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.




The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


Note: Test procedure on Beamforming mode is same as BT BDR and EDR mode.

RESULTS




9.8.1. HIGH POWER BASIC DATA RATE GFSK MODULATION


ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

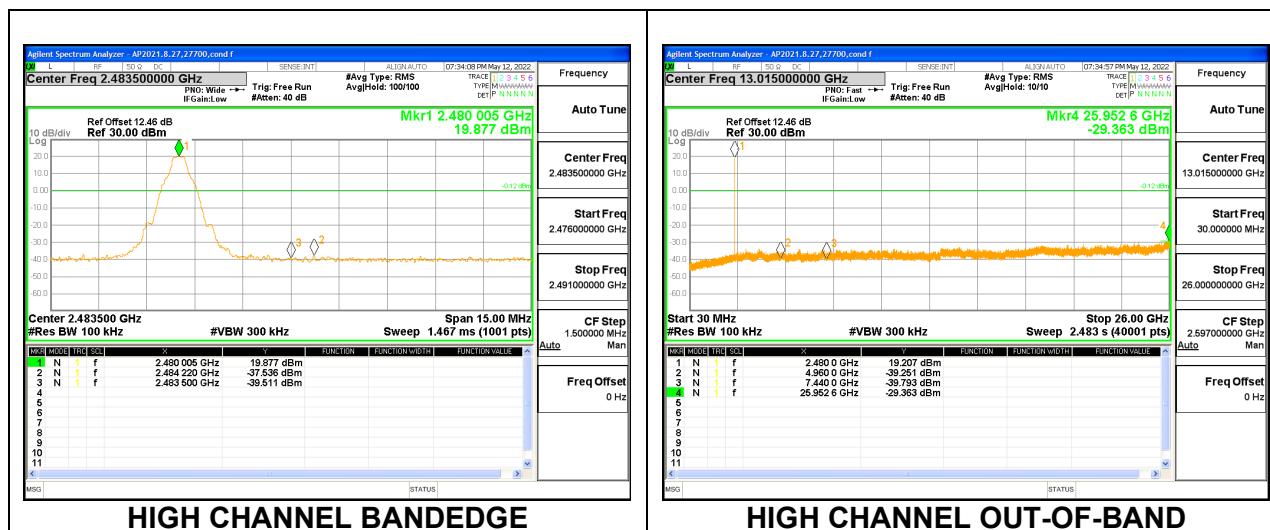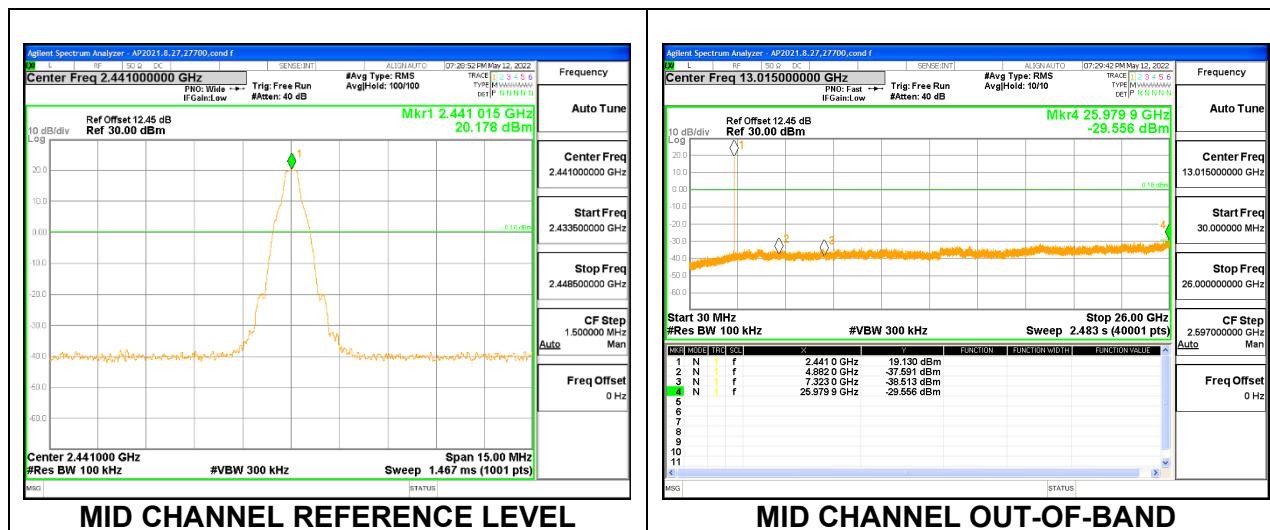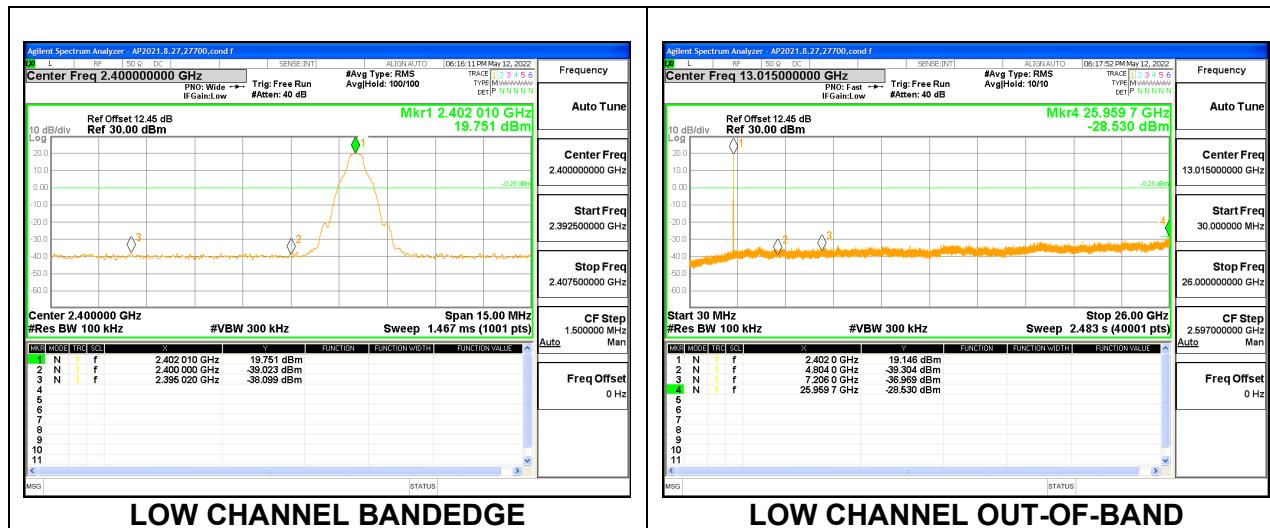

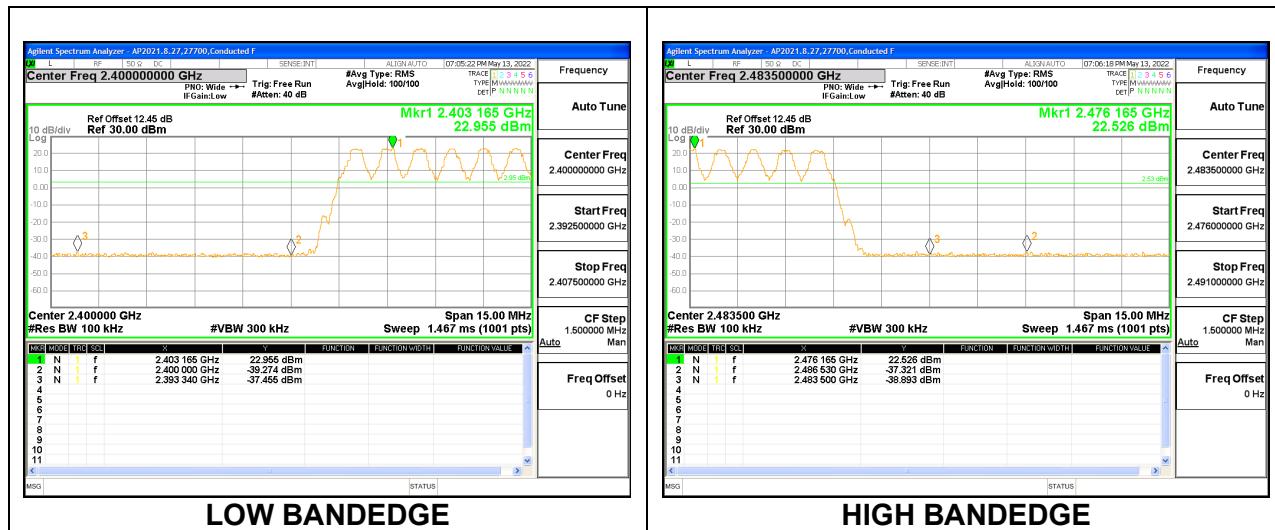ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON




ANT 3 SPURIOUS EMISSIONS, NON-HOPPING

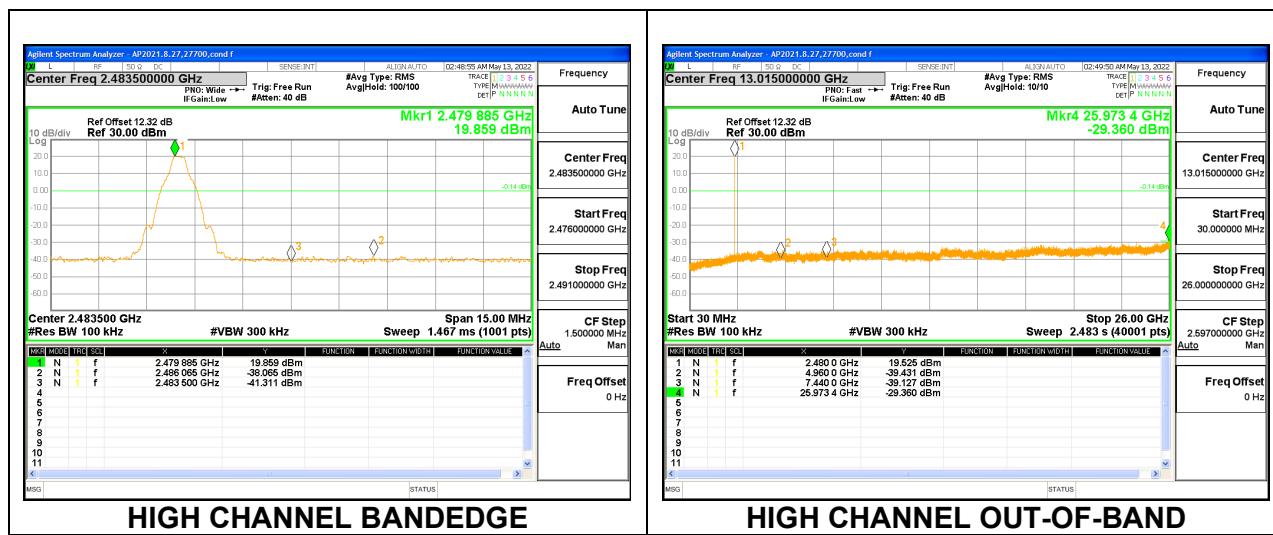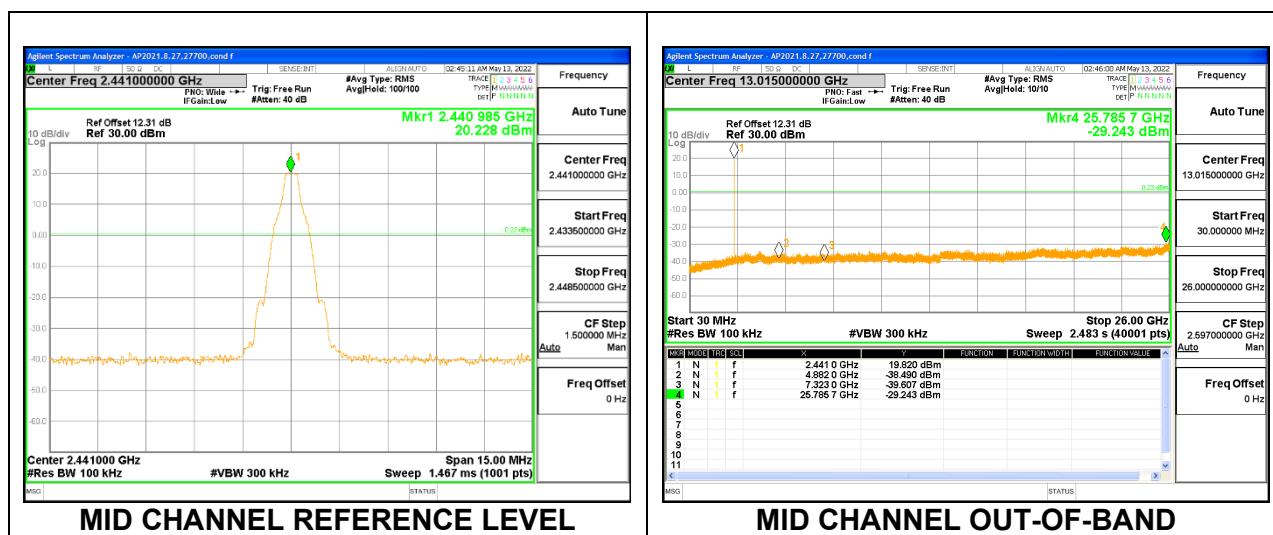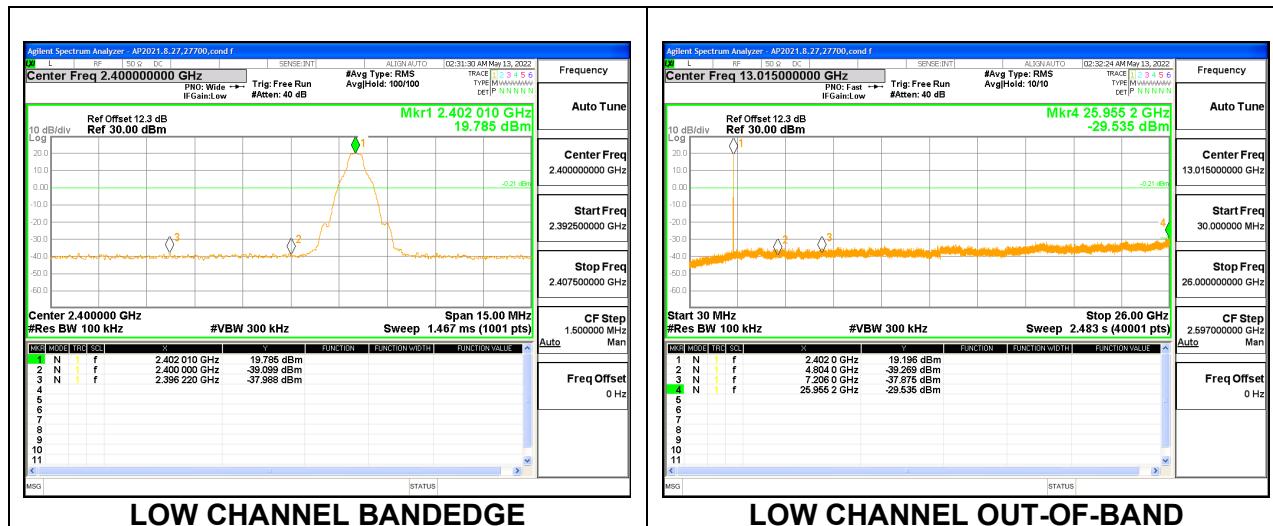


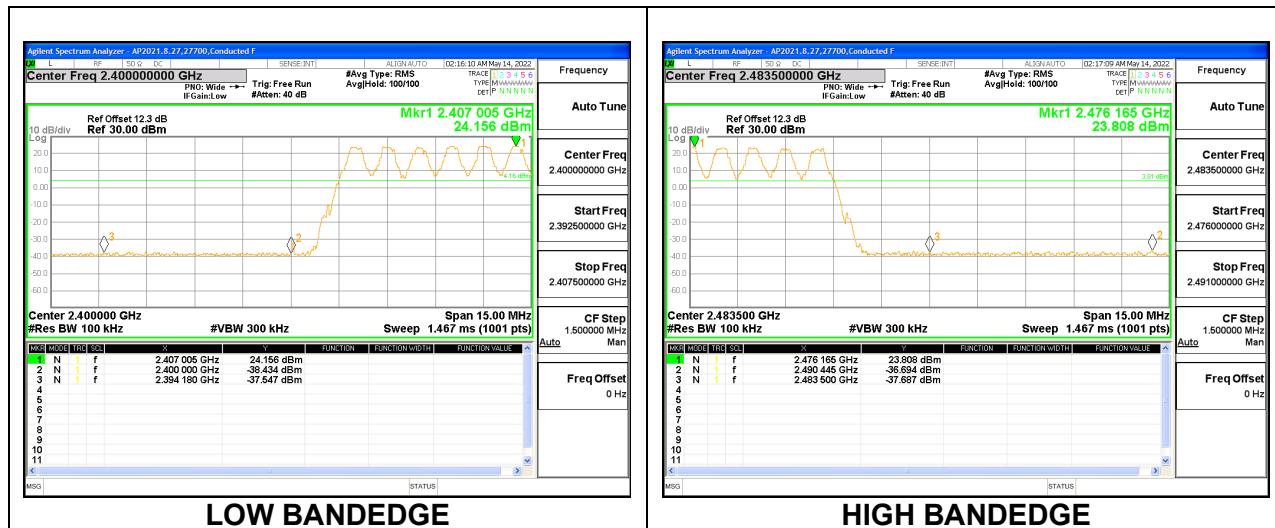ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON



9.8.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION


ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

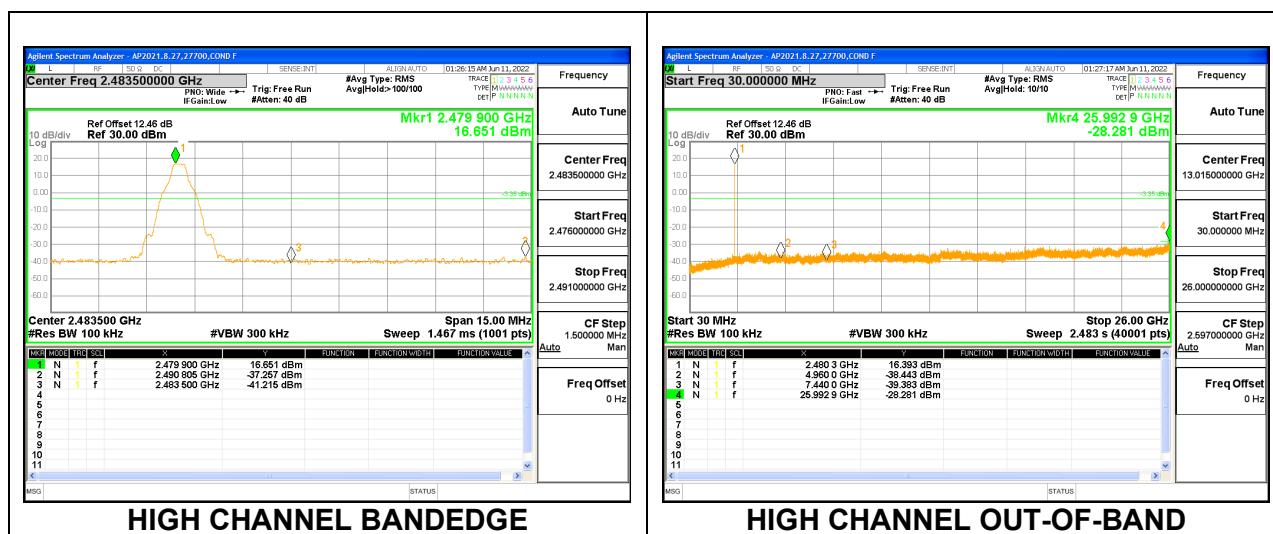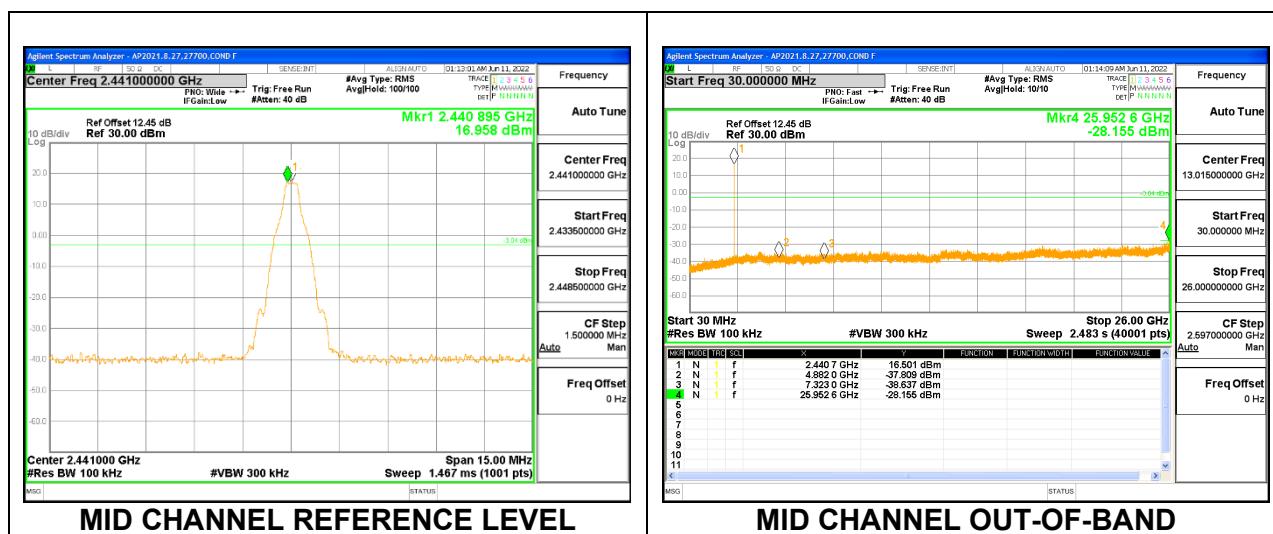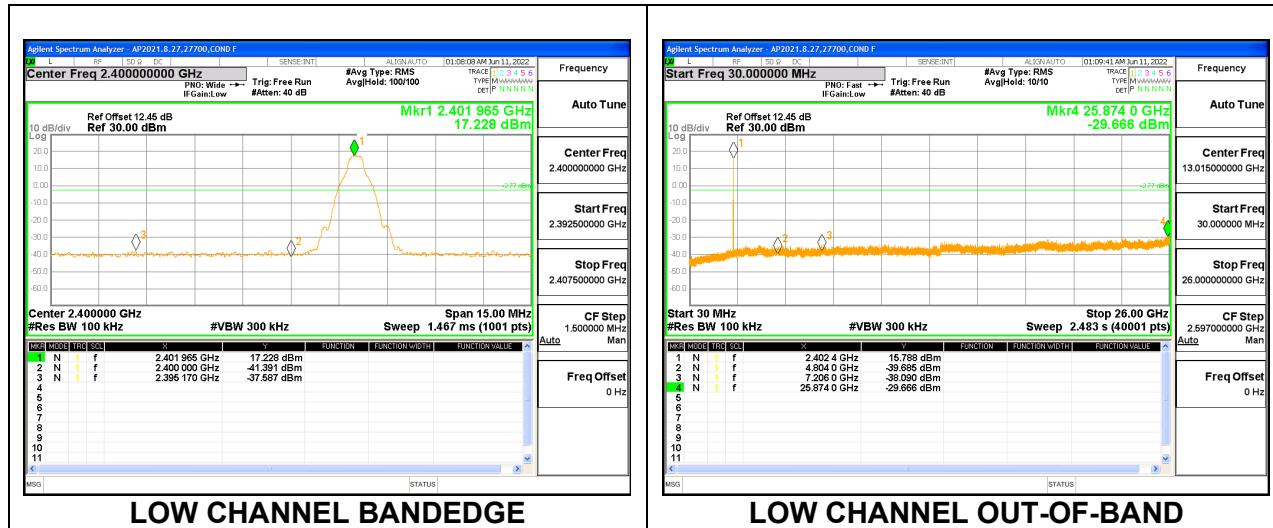

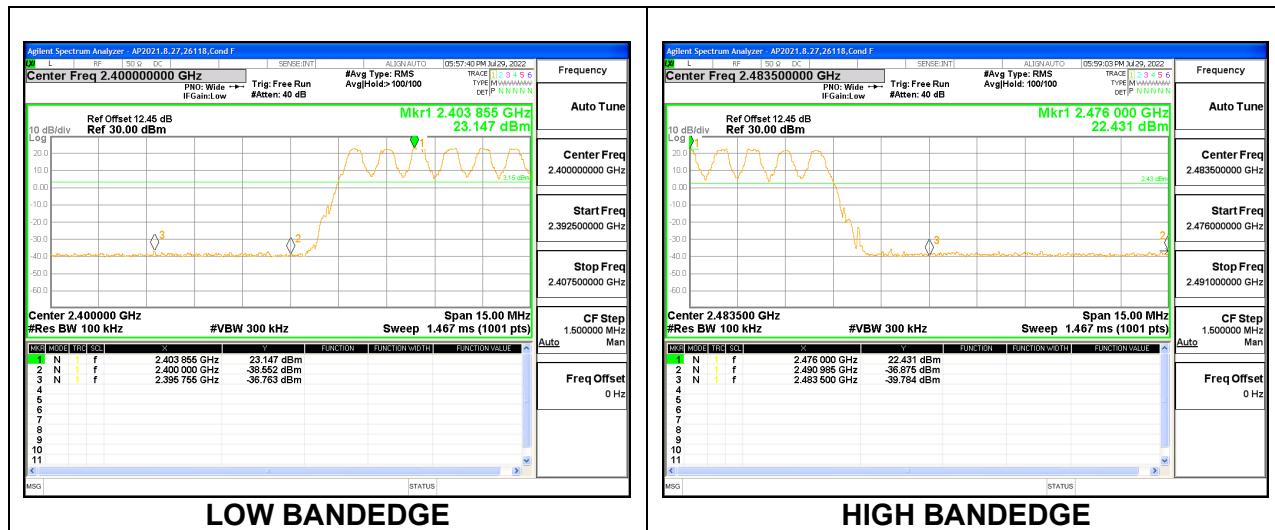ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON




ANT 3 SPURIOUS EMISSIONS, NON-HOPPING

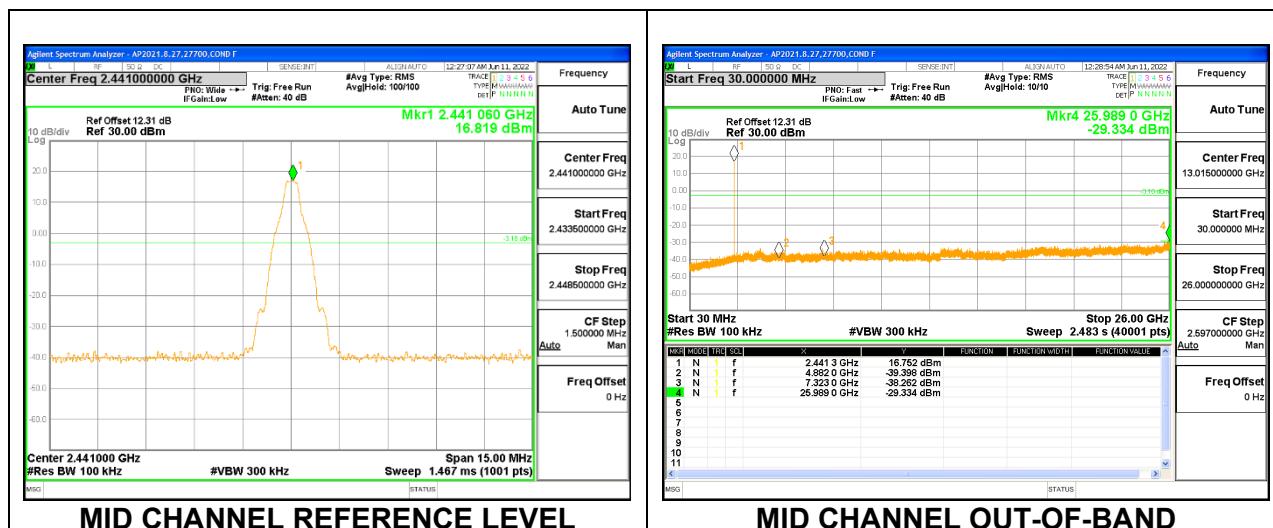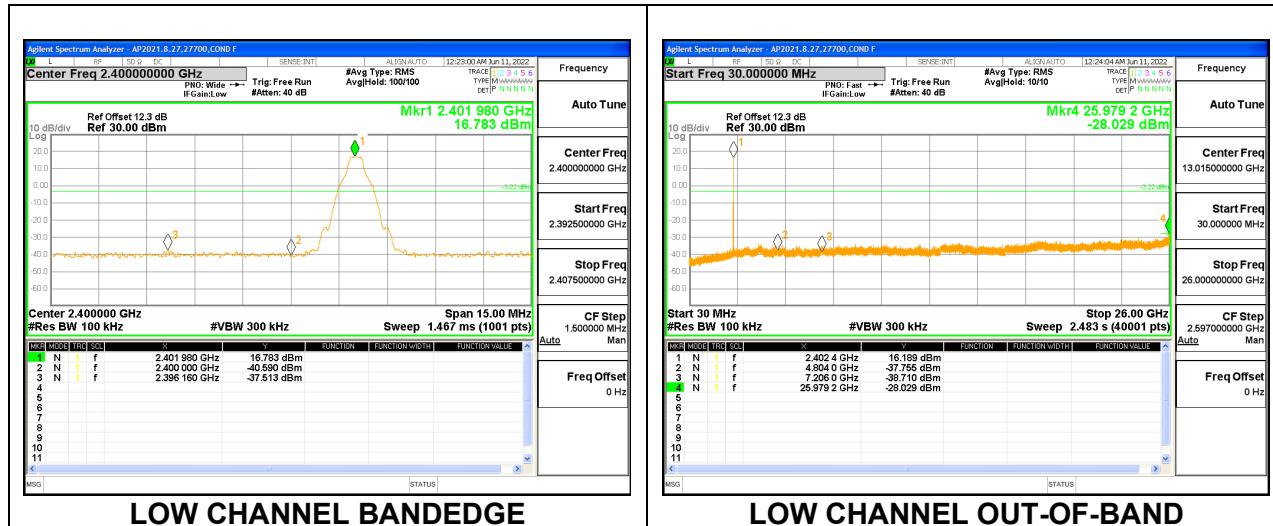

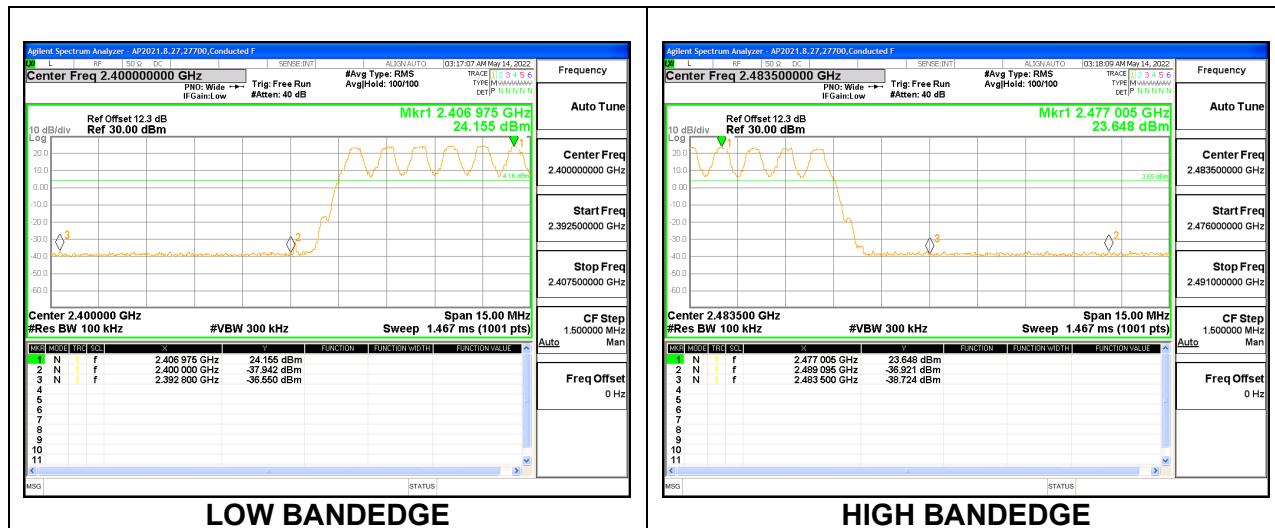ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON




9.8.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

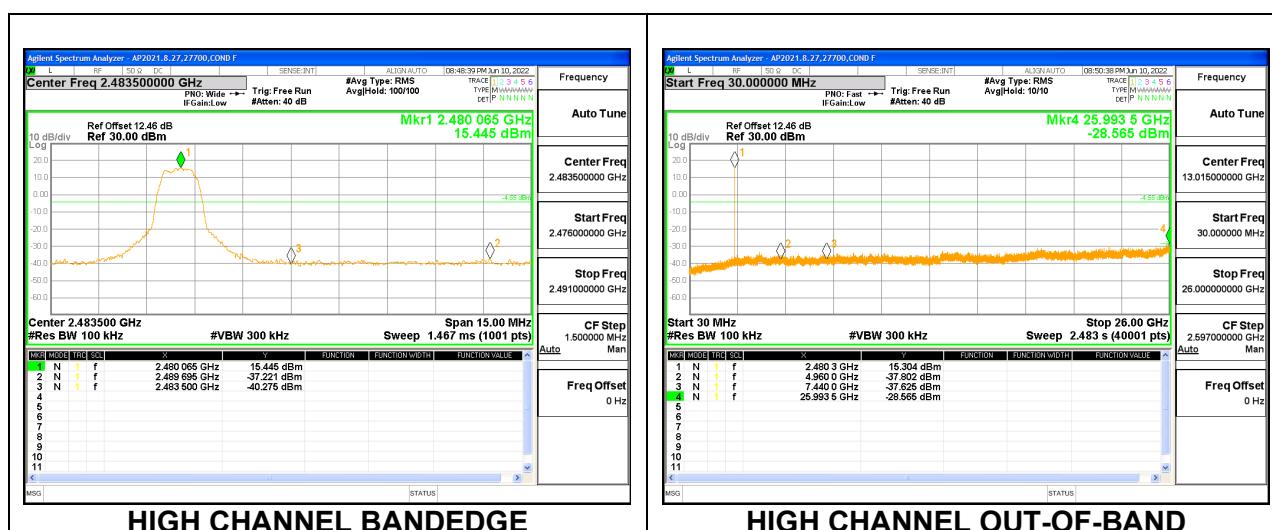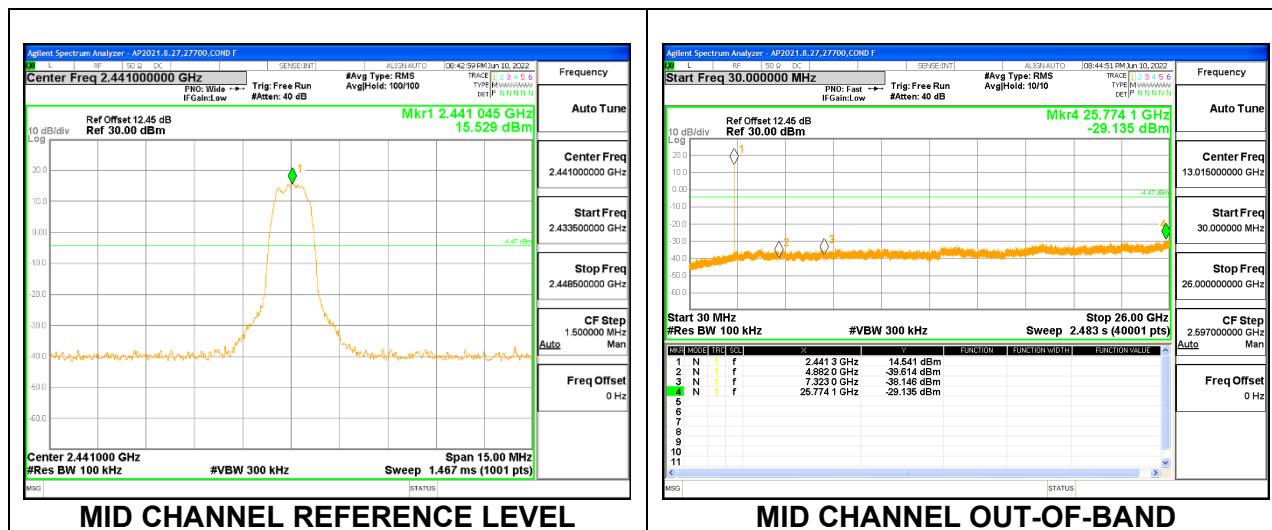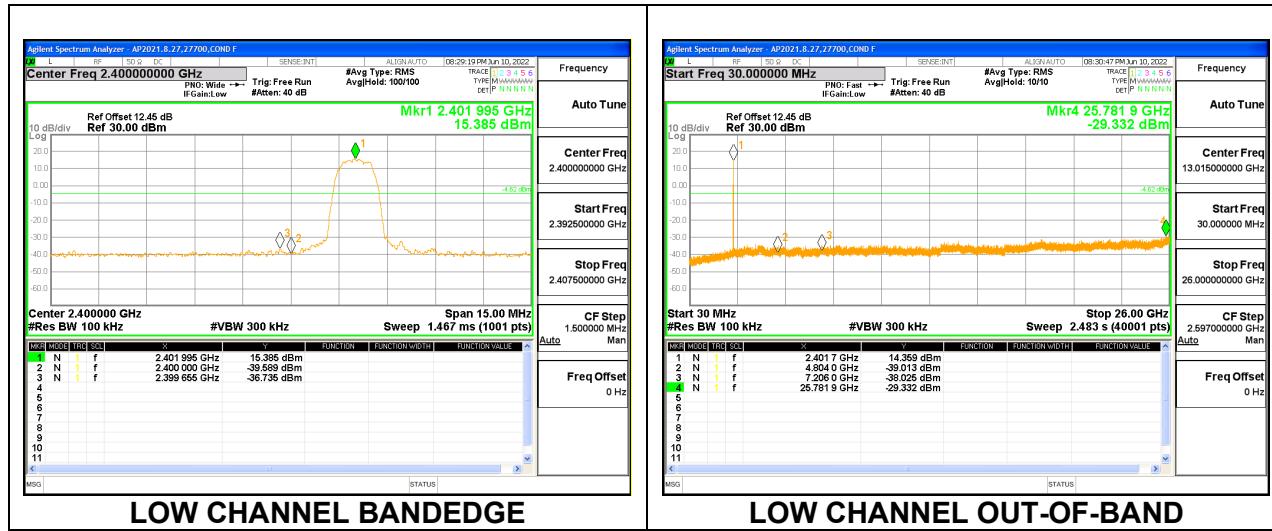

ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

ANT 3 SPURIOUS EMISSIONS, NON-HOPPING

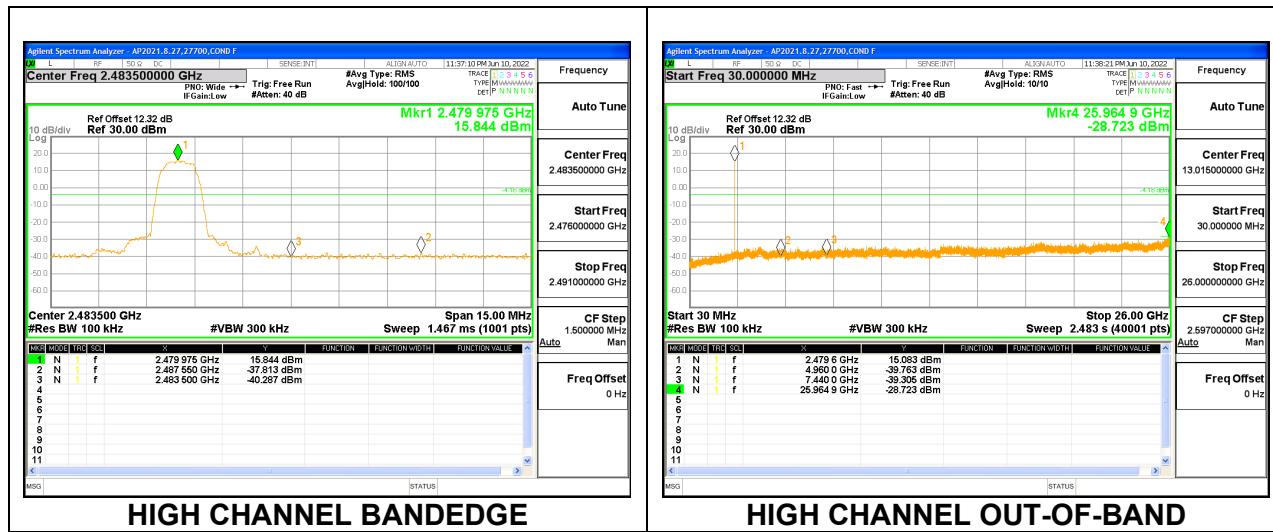
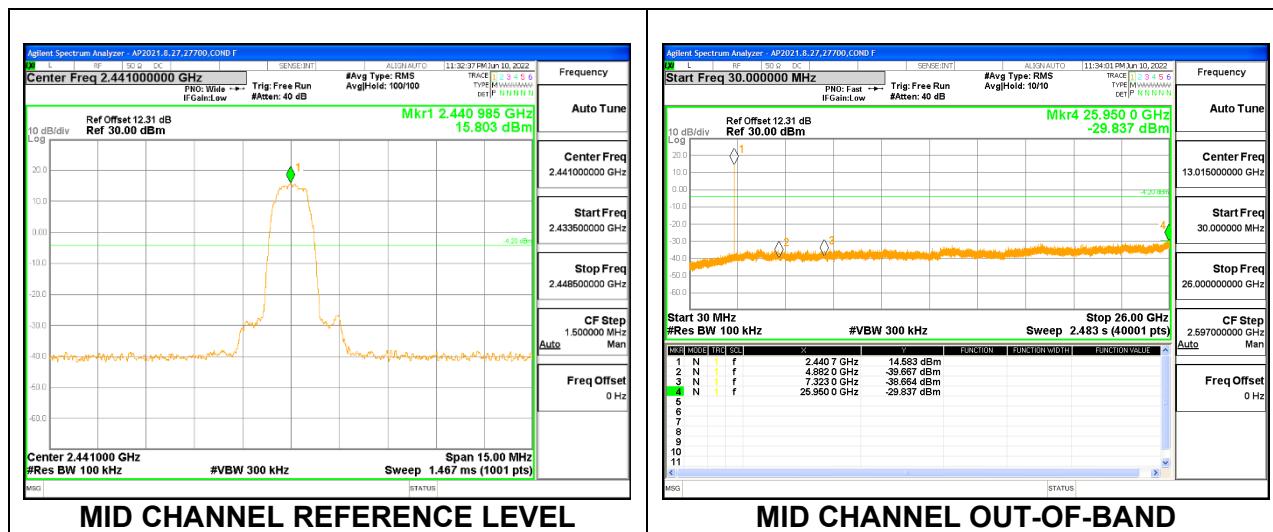
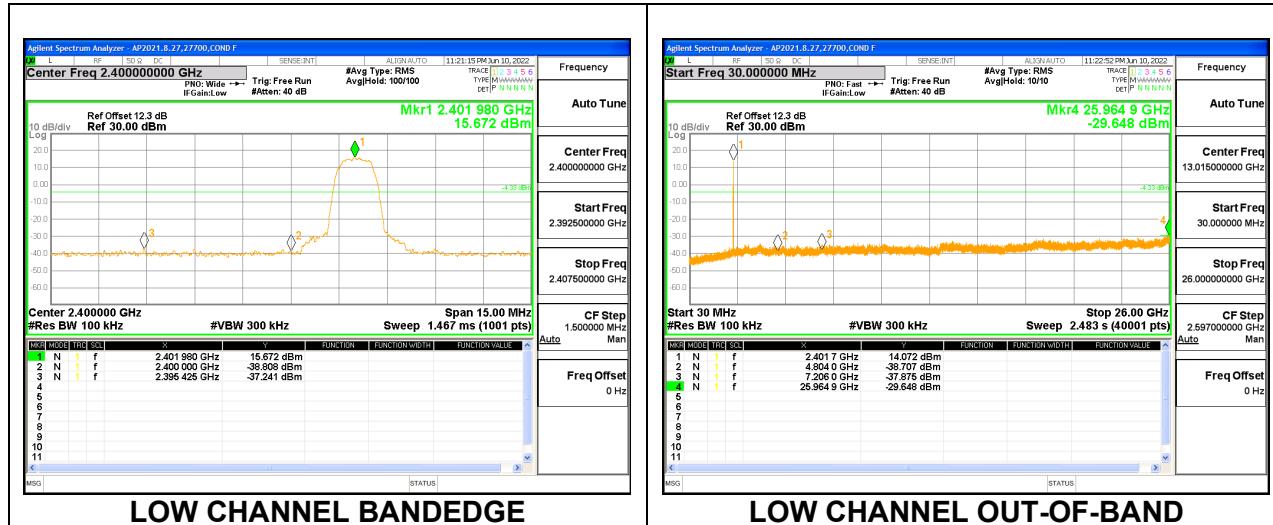



ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON





9.8.4. HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION

ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

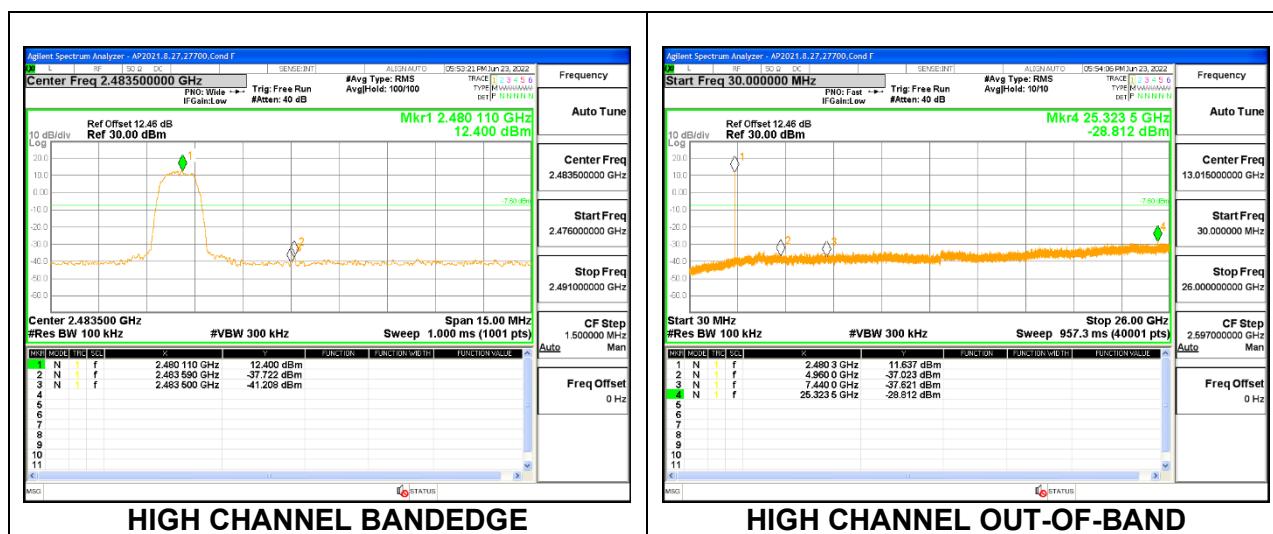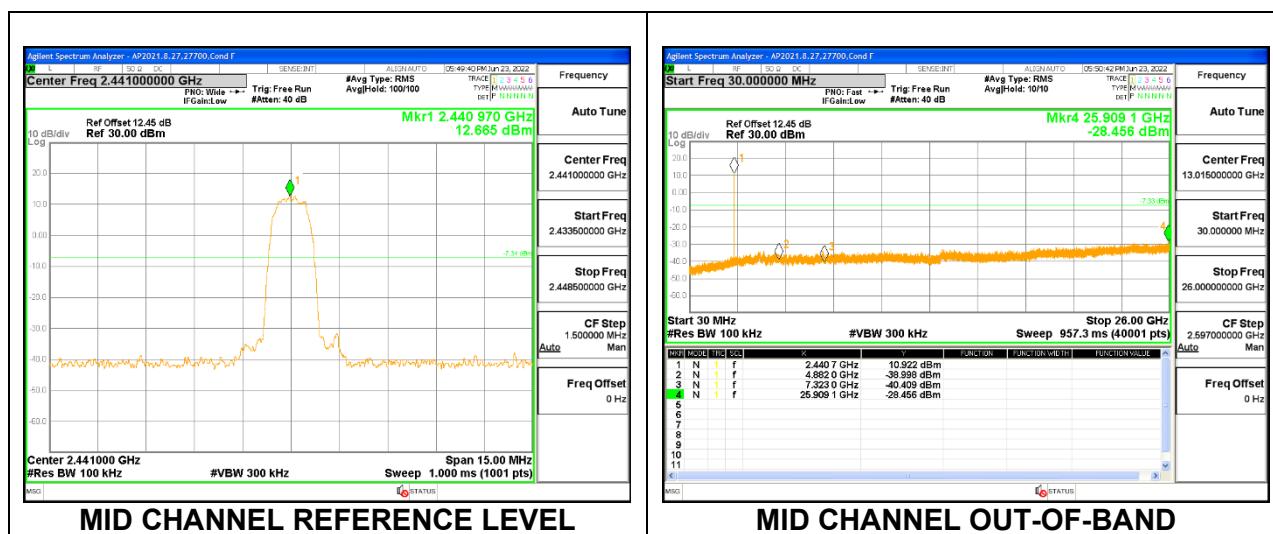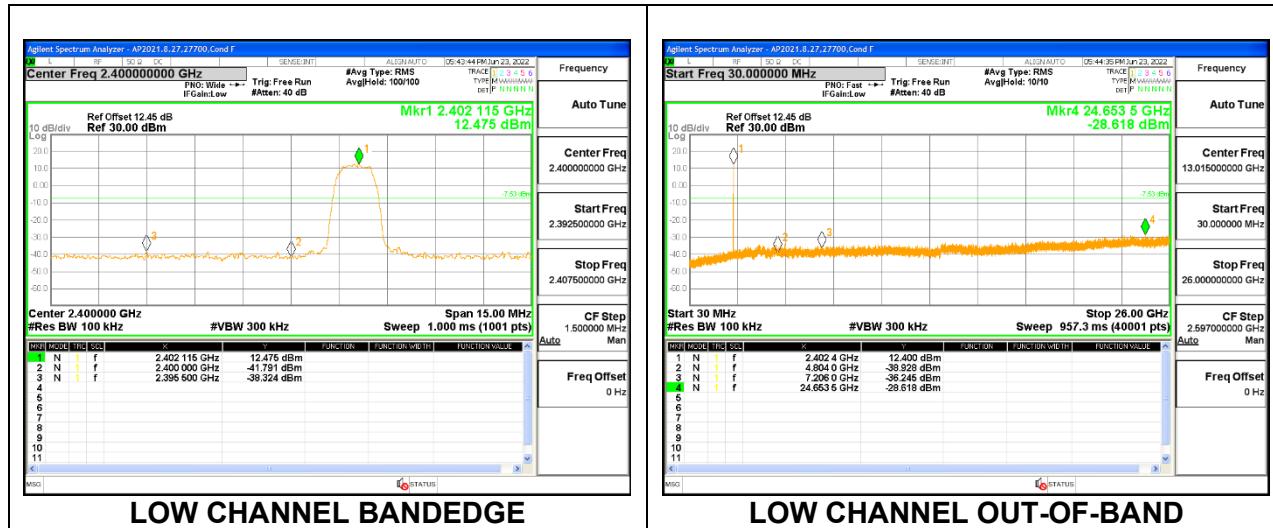

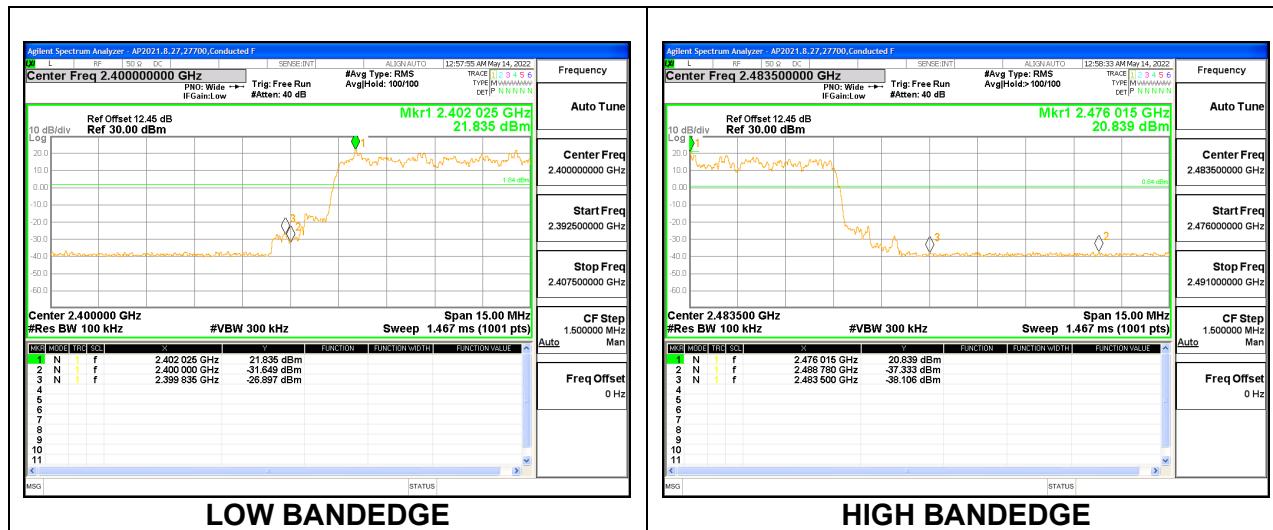ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

ANT 3 SPURIOUS EMISSIONS, NON-HOPPING

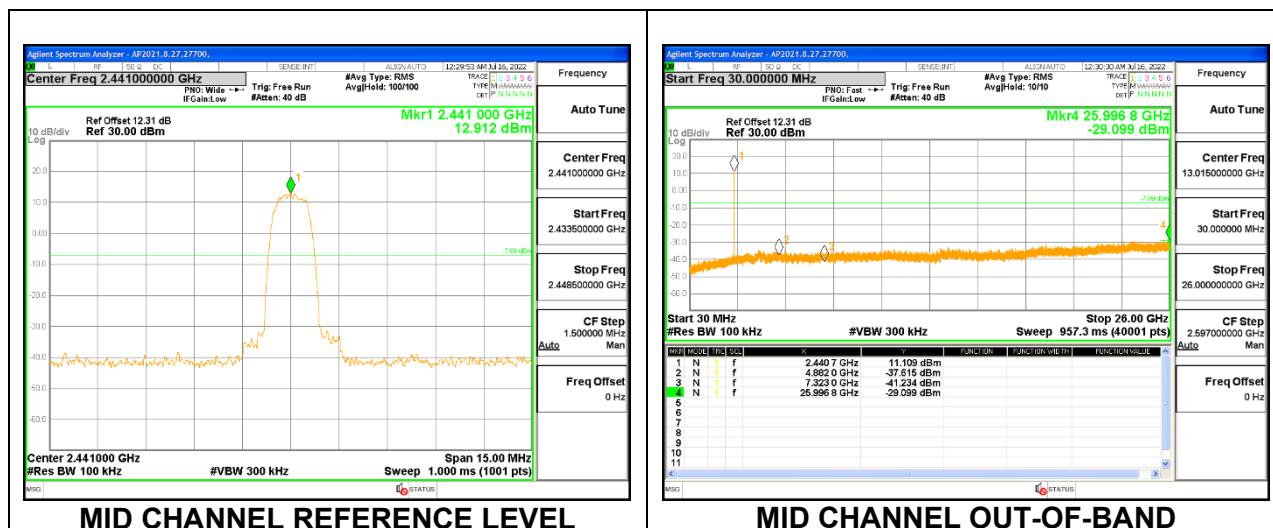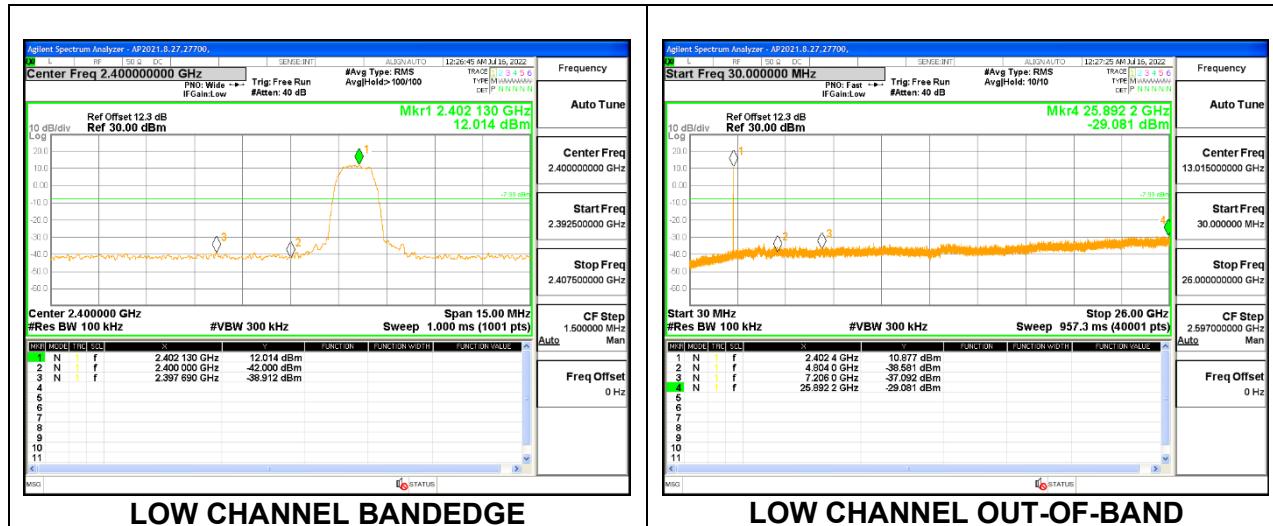

ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON