

TEST REPORT

Report Number : 15496277-E39V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3258

FCC ID : BCG-E8947A

EUT Description : SMARTPHONE

Test Standard : FCC CFR 47 PART 30 MOBILE TRANSMITTER (5GM)

Date Of Issue:
August 19, 2025

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	08-04-25	Initial Issue	GP CHIN
V2	08-19-25	Addressed TCB feedback on TRP measurement in Section 8.4.	GP CHIN

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	8
4.1. METROLOGICAL TRACEABILITY	8
4.2. DECISION RULES	8
4.3. MEASUREMENT UNCERTAINTY	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.2. DESCRIPTION OF AVAILABLE ANTENNA	10
5.3. MAXIMUM OBW AND EIRP	11
5.4. SOFTWARE AND FIRMWARE	12
5.5. WORST CASE ORIENTATION	12
5.6. BEAM ID	13
5.7. DESCRIPTION OF TEST SETUP	13
6. TEST AND MEASUREMENT EQUIPMENT	19
7. SUMMARY OF TEST RESULTS	20
8. APPLICABLE LIMITS AND TEST RESULTS	21
8.1. OCCUPIED BANDWIDTHS	21
8.1.1. OBW n258 SB1	22
8.1.2. OBW n258 SB2	27
8.1.3. OBW n261	33
8.1.4. OBW n260	39
8.2. EQUIVALENT ISOTROPIC RADIATED POWERS	45
8.2.1. EIRP n258 SB1	47
8.2.2. EIRP n258 SB2	54
8.2.3. EIRP n261	62
8.2.4. EIRP n260	70
8.3. BAND EDGE EMISSIONS	78
8.3.1. BAND EDGE n258 SB1 SISO-DUAL 1CC	80
8.3.2. BAND EDGE n258 SB1 SISO-DUAL 2CC	86
8.3.3. BAND EDGE n258 SB1 SISO-DUAL 3CC	92
8.3.4. BAND EDGE n258 SB1 SISO-DUAL 4CC	95
8.3.5. BAND EDGE n258 SB1 MIMO 1CC	98
8.3.6. BAND EDGE n258 SB1 MIMO 2CC	104
8.3.7. BAND EDGE n258 SB1 MIMO 3CC	110
8.3.8. BAND EDGE n258 SB1 MIMO 4CC	113

8.3.9.	BAND EDGE n258 SB2 SISO-DUAL 1CC	116
8.3.10.	BAND EDGE n258 SB2 SISO-DUAL 2CC	123
8.3.11.	BAND EDGE n258 SB2 SISO-DUAL 3CC	129
8.3.12.	BAND EDGE n258 SB2 SISO-DUAL 4CC	135
8.3.13.	BAND EDGE n258 SB2 MIMO 1CC	141
8.3.14.	BAND EDGE n258 SB2 MIMO 2CC	147
8.3.15.	BAND EDGE n258 SB2 MIMO 3CC	153
8.3.16.	BAND EDGE n258 SB2 MIMO 4CC	159
8.3.17.	BAND EDGE n261 SISO-DUAL 1CC	165
8.3.18.	BAND EDGE n261 SISO-DUAL 2CC	172
8.3.19.	BAND EDGE n261 SISO-DUAL 3CC	178
8.3.20.	BAND EDGE n261 SISO-DUAL 4CC	184
8.3.21.	BAND EDGE n261 MIMO 1CC	190
8.3.22.	BAND EDGE n261 MIMO 2CC	196
8.3.23.	BAND EDGE n261 MIMO 3CC	202
8.3.24.	BAND EDGE n261 MIMO 4CC	208
8.3.25.	BAND EDGE n260 SISO-DUAL 1CC	214
8.3.26.	BAND EDGE n260 SISO-DUAL 2CC	221
8.3.27.	BAND EDGE n260 SISO-DUAL 3CC	227
8.3.28.	BAND EDGE n260 SISO-DUAL 4CC	233
8.3.29.	BAND EDGE n260 MIMO 1CC	239
8.3.30.	BAND EDGE n260 MIMO 2CC	245
8.3.31.	BAND EDGE n260 MIMO 3CC	251
8.3.32.	BAND EDGE n260 MIMO 4CC	257
8.4.	RADIATED SPURIOUS EMISSIONS	263
8.4.1.	RSE n258 SB1 30 – 1000 MHz	266
8.4.2.	RSE n258 SB1 1 - 18 GHz	267
8.4.3.	RSE n258 SB1 18 - 23 GHz	268
8.4.4.	RSE n258 SB1 23 - 24.25 GHz	270
8.4.5.	RSE n258 SB1 24.45 - 25.5 GHz	275
8.4.6.	RSE n258 SB1 25.5 - 26.5 GHz	280
8.4.7.	RSE n258 SB1 26.5 - 40 GHz	281
8.4.8.	RSE n258 SB1 40 - 50 GHz	283
8.4.9.	RSE n258 SB1 50 - 75 GHz	285
8.4.10.	RSE n258 SB1 75 - 100 GHz	287
8.4.11.	RSE n258 SB2 30 – 1000 MHz	289
8.4.12.	RSE n258 SB2 1 - 18 GHz	290
8.4.13.	RSE n258 SB2 18 – 23.6 GHz	291
8.4.14.	RSE n258 SB2 23.6 – 24.75 GHz	293
8.4.15.	RSE n258 SB2 25.25 - 26.5 GHz	298
8.4.16.	RSE n258 SB2 26.5 - 40 GHz	303
8.4.17.	RSE n258 SB2 40 - 50 GHz	305
8.4.18.	RSE n258 SB2 50 - 75 GHz	306
8.4.19.	RSE n258 SB2 75 - 100 GHz	308
8.4.20.	RSE n261 30 – 1000 MHz	310
8.4.21.	RSE n261 1 - 18 GHz	311
8.4.22.	RSE n261 18 - 26.5 GHz	312
8.4.23.	RSE n261 26.5 - 27.5 GHz	314
8.4.24.	RSE n261 28.35 - 29 GHz	319
8.4.25.	RSE n261 29 - 40 GHz	324
8.4.26.	RSE n261 40 - 50 GHz	326
8.4.27.	RSE n261 50 - 75 GHz	327

8.4.28.	RSE n261 75 - 100 GHz	329
8.4.29.	RSE n260 30 – 1000 MHz	331
8.4.30.	RSE n260 1 - 18 GHz	332
8.4.31.	RSE n260 18 - 26.5 GHz	333
8.4.32.	RSE n260 26.5 - 36 GHz	334
8.4.33.	RSE n260 36 – 37 GHz	335
8.4.34.	RSE n260 40 – 41 GHz	340
8.4.35.	RSE n260 41 – 50 GHz	344
8.4.36.	RSE n260 50 - 75 GHz	345
8.4.37.	RSE n260 75 - 110 GHz	347
8.4.38.	RSE n260 110 - 170 GHz	348
8.4.39.	RSE n260 170 - 200 GHz	350
8.5.	FREQUENCY STABILITY	351
8.5.1.	FREQUENCY STABILITY n258 SB1	352
8.5.2.	FREQUENCY STABILITY n258 SB2	352
8.5.3.	FREQUENCY STABILITY n261	353
8.5.4.	FREQUENCY STABILITY n260	353
9.	SETUP PHOTOS.....	354
APPENDIX A		355
1.	50 - 75 GHz VDI WR15SAX-F	355
2.	75 - 110 GHz VDI WR10SAX-F	355
3.	110 - 170 GHz VDI WR6.5SAX-F	355
4.	170 - 260 GHz VDI WR4.3SAX-F	355
5.	33 - 50 GHz CMI HO22R HORN ANTENNA	357
6.	50 - 75 GHz CMI HO15R HORN ANTENNA	358
7.	75 - 110 GHz CMI HO10R HORN ANTENNA	359
8.	110 - 170 GHz CMI HO6R HORN ANTENNA	360
9.	170 - 260 GHz CMI HO4R HORN ANTENNA	361

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: SMARTPHONE

MODEL: A3258

BRAND: APPLE

SERIAL NUMBERS: LD4X9G6KNX, J3C33LK2DG, KR6MC936D9

SAMPLE RECEIPT DATES: 05/19/2025, 06/17/2025, 06/27/2025

DATE TESTED: 05/20/2025 – 07/17/2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 30 Mobile Transmitter (5GM)	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested can demonstrate compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not considered unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.

Approved & Released For
UL Verification Services Inc. By:



Gia-Piao (GP) Chin
Operations Manager
Consumer Technology Division
UL Verification Services Inc.

Tested By:



Kin Wong
Laboratory Engineer Associate
Consumer Technology Division
UL Verification Services Inc.

Co-Reviewed By:



Huahan Li
Senior Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods:

1. FCC CFR 47 Part 2
2. FCC CFR 47 Part 30
3. ANSI C63.26-2015
4. KDB 842590 D01 Upper Microwave Flexible Use Service v01r03
5. KDB 971168 D01 Power Meas. License Digital Systems v03r01

3. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☐	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☐	Building 3: 843 Auburn Court, Fremont, CA 94538 USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538 USA			
☐	Building 5: 47670 Kato Rd, Fremont, CA 94538 USA			

4. CALIBRATION AND UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Worst Case Radiated Disturbance, 9 KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case TRP, 18000 to 26000 MHz	4.10 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB
Worst Case TRP, 26000 to 40000 MHz	4.95 dB
Worst Case Radiated Disturbance, >40000 MHz	2.89 dB
Worst Case TRP, >40000 MHz	2.94 dB
Temperature	±0.9 °C
Voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a smartphone with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5GNR1, 5GNR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-NB, Wireless Power Transfer (WPT) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble.

This test report addresses the TDD 5G NR operational mode on following frequency bands:

n258 (denoted as n258 SB1 in this report): 24.25 – 24.45 GHz

n258 (denoted as n258 SB2 in this report): 24.75 – 25.25 GHz

n261: 27.5 – 28.35 GHz

n260: 37 – 40 GHz

The EUT contains one set of 5G FR2 RFIC Chipset/Antenna radio, which supports SISO, SISO-Dual and MIMO modes in UE channel bandwidths of 50 MHz and 100 MHz, with 120 kHz SCS and up to 4 component carriers (1CC to 4CC) for carrier aggregation techniques. The SISO mode operates with either the horizontal or vertical elements active. The SISO-Dual and MIMO modes operate with both horizontal and vertical elements active at similar power level per polarization. MIMO mode only supports CP-OFDM access scheme, but SISO-Dual supports both CP-OFDM and DFT-s-OFDM access schemes. DFT-s-OFDM operates at a higher power level than CP-OFDM.

QPSK, 16QAM and 64QAM modulation formats are used in all three SISO, SISO-Dual and MIMO modes. $\pi/2$ BPSK modulation format is only used in SISO and SISO-Dual modes.

5.2. DESCRIPTION OF AVAILABLE ANTENNA

The EUT utilizes one set of 1x5 elements integrated dual-polarized patch antenna array, named as Ant M1. The peak antenna gains of horizontal/vertical polarization and the nominal antenna gain of cross-polarizations of the antenna, based on frequency bands, are listed in the following table.

Frequency Band	Peak Gain (Horizontal/Vertical)	Cross-Polarization
	(dBi)	(dBi)
n258 SB1 & SB2	14.2	16.8
n261	15.6	17.5
n260	16.1	18.5

5.3. MAXIMUM OBW AND EIRP

Maximum Occupied Bandwidth based on frequency bands.

Frequency Band	Control System	CH BW	CCs Active	OBW	Emission	Modulation
		(MHz)		(MHz)	Designator	
n258 SB1	SISO-Dual	50	4	196.19	196MG7W	Pi/2 BPSK
	SISO-Dual	50	4	195.30	195MD7W	16QAM
n258 SB2	MIMO	100	4	391.49	391MG7W	QPSK
	SISO-Dual	100	4	389.28	389MD7W	64QAM
n261	MIMO	100	4	391.33	391MG7W	QPSK
	SISO-Dual	100	4	389.98	390MD7W	16QAM
n260	MIMO	100	4	392.06	392MG7W	QPSK
	SISO-Dual	100	4	390.88	391MD7W	64QAM

Maximum Average EIRP based on frequency bands.

Frequency Band	Control System	CH BW	CCs Active	Avg EIRP		Modulation
		(MHz)		(dBm)	(W)	
n258 SB1	SISO-Dual	100	1	32.26	1.683	QPSK
	SISO-Dual	100	1	30.31	1.074	16QAM
n258 SB2	SISO-Dual	50	1	30.63	1.156	QPSK
	SISO-Dual	100	1	28.83	0.764	16QAM
n261	SISO-Dual	50	1	34.17	2.612	QPSK
	SISO-Dual	100	1	32.20	1.660	16QAM
n260	SISO-Dual	100	1	35.28	3.373	QPSK
	SISO-Dual	100	1	32.79	1.901	16QAM

5.4. SOFTWARE AND FIRMWARE


The Software/Firmware version used at test is 0.08.00.

5.5. WORST CASE ORIENTATION

For all 5G NR FR2 Bands, the worst-case scenario for all measurements is based on the EIRP measurement investigation results. EIRPs were measured on Pi/2 BPSK, QPSK, 16QAM and 64QAM modulations. It was found that QPSK results in SISO-Dual mode supporting DFT-s-OFDM were the worst case.

The fundamental and radiated spurious emission were investigated in three orthogonal planes, XY (azimuth), XZ (roll and elevation) and YZ (receive antenna polarization), where is applicable on all 3 antenna arrays.

In the exploratory scan, the EUT is placed on an open-air fixture, allowing no blockage of the signal as measured by the receive antenna. The positioners, one at a time, perform a sweep, taking EIRP reading using peak detection at small increments of step size. The positioner is then moved to its maximum EIRP orientation found during the sweep, and the next positioner will repeat the scan process. Once all positioners have been individually scanned, the positioners will execute an additional set of scans for increased accuracy to identify the final optimum position resulting in highest EIRP for the frequency or band under investigation.

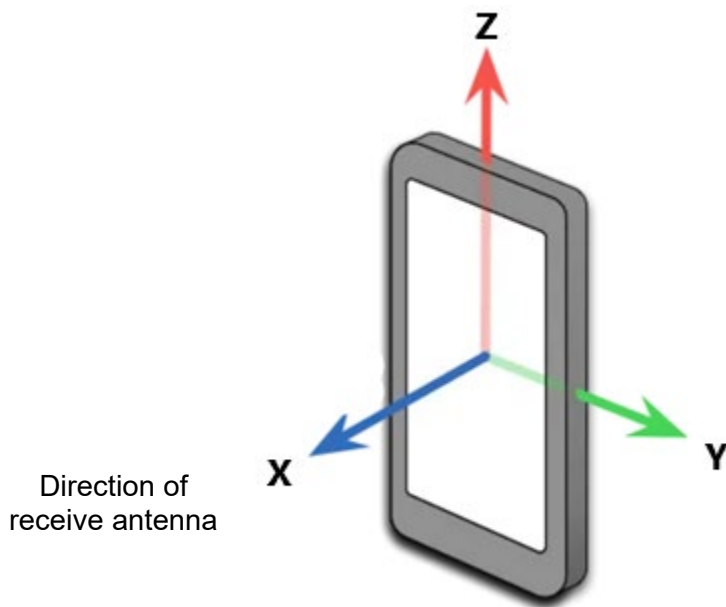

5.6. BEAM ID

In all tests, the following Peak Beam ID settings of each frequency band were applied for final measurements.

Frequency Band	BID	Paired with
n258 SB1	13	269
n258 SB2	13	269
n261	18	274
n260	13	269

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
LAPTOP + Adapter	Apple	MacBook Pro	HRP046790
Brisket Cable-USB Adapter	Apple	---	F2010M20000877
LAPTOP + Adapter	Apple	MacBook Pro	1PWR5000019-00303
Brisket Cable-USB Adapter	Apple	---	F2010M20000852
LAPTOP + Adapter	Apple	MacBook Pro	1PWR5000019
Brisket Cable-USB Adapter	Apple	---	F2010M20000890
LAPTOP + Adapter	Apple	MacBook Pro	FVFG319FQ05F
Brisket Cable-USB Adapter	Apple	---	F2010M20000859

I/O CABLES

I/O Cable List						
Cable No.	Port	No. of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Support Laptop Power	2	USB Type C	Shielded	1.8	--
2	Data	2	USB Type A	Shielded	7	--
3	Data + DC Power	2	USB Type C	Shielded	1	--
4	DC Power	2	USB Type A	Shielded	1	
5	DC Power	1	Clip leads	Un-shielded	1	--
6	AC Line	1	3-prong	Un-shielded	1.8	--

TEST SETUP

Radiated spurious emission measurements from 30 MHz – 18 GHz were performed in a semi anechoic chamber (SAC) conforming to the normalized site attenuation requirements specified in ANSI C63.4 for below 1 GHz and the site validation criteria called out in CISPR 16-1-4:2019 over the frequency range 1 - 18 GHz.

Radiated power (EIRP) measurements of the fundamental signal and radiated spurious emissions (EIRP and TRP) measurements above 18 GHz were performed in four full anechoic chambers (FAC), 01-mmW-A, -B, -C & -D. In accordance with ANSI C63.26 and KDB publication 842590 D01 v01r03, the chambers meet the sVSWR validation requirements called out in CISPR 16-1-4:2019 over the frequency range 1 - 18 GHz. As required by ANSI C63.26, the reflection contributions are reduced to the extent possible to allow for measurements to be made up to 200 GHz in accordance with KDB 842590. The chamber absorber reflectivity fully supports chamber performance over this frequency range.


A roll-axis positioner was used to manipulate the EUT through the positions in space. The positioner was mounted on top of a turntable, bringing the EUT's antenna height on the test fixture to 1.5 m from the ground plane. The test procedures for exploratory scan and final measurement were described in Section 5.5.

In the search for the Beam ID pair transmitting the highest EIRP of each frequency band to use at final test, the Manufacturer provided 3 pairs of Beam ID yielding the highest EIRPs for investigation. These Beam ID pairs were selected from the simulated results based on EIRP Simulation tool.


All tests were performed in a non-signaling, stand-alone Factory Test Mode (FTM) of operation. FTM software was used to configure EUT at continuous Tx operation in EN-DC mode. When implemented out in the field, the EUT will operate with a maximum uplink configuration (i.e., a maximum uplink duty cycle of 100%).

SETUP DIAGRAM FOR TESTS


RF TESTS

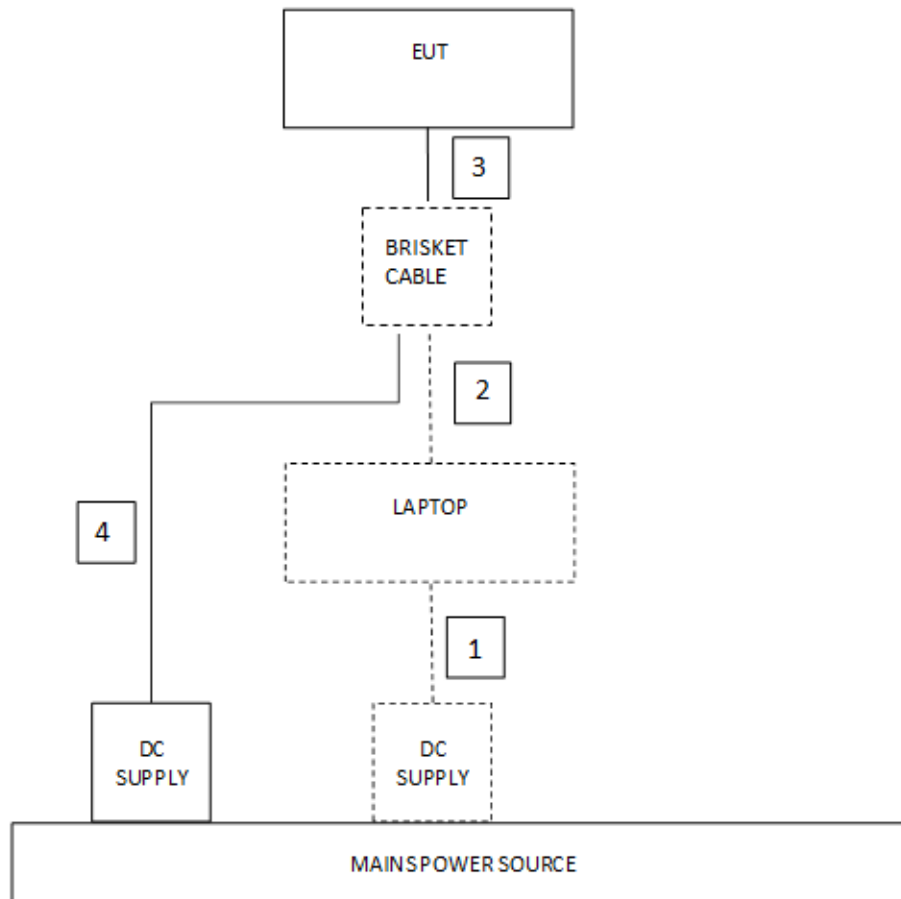


TEST SITE DIAGRAM – Below 1 GHz

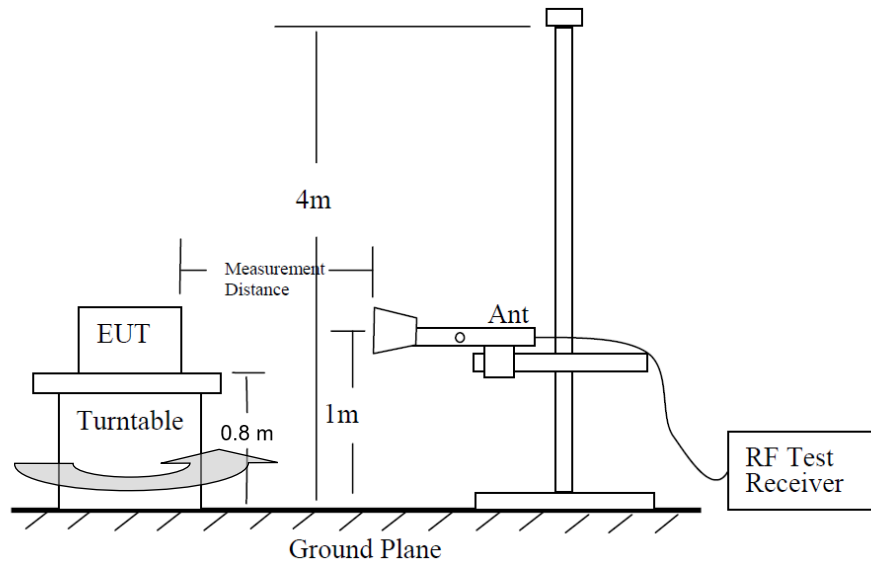


TEST SITE DIAGRAM – 1 - 18 GHz

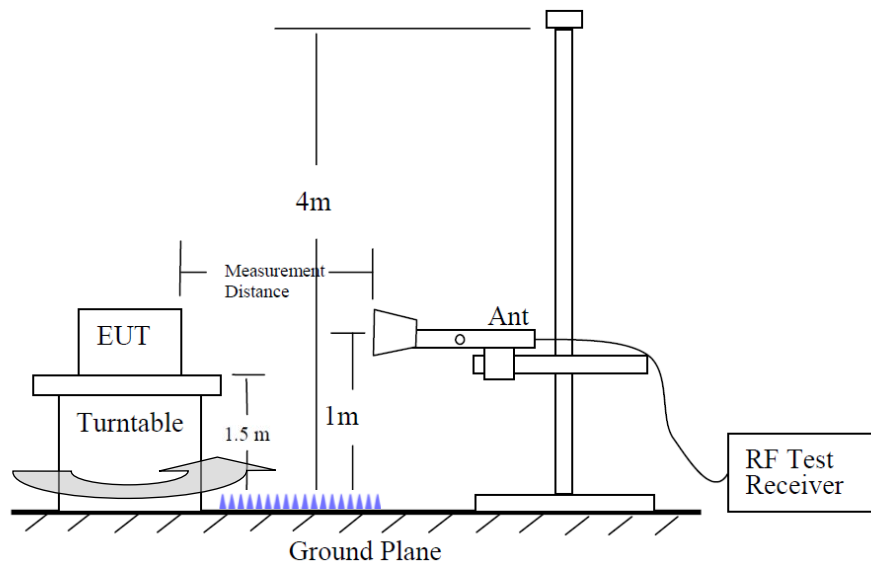

TEST SITE DIAGRAM – Above 18 GHz & mmWave

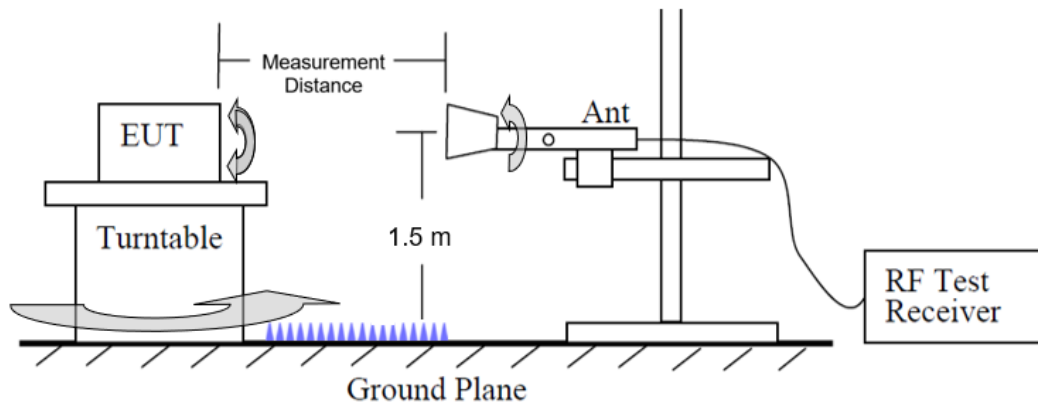

FREQUENCY STABILITY

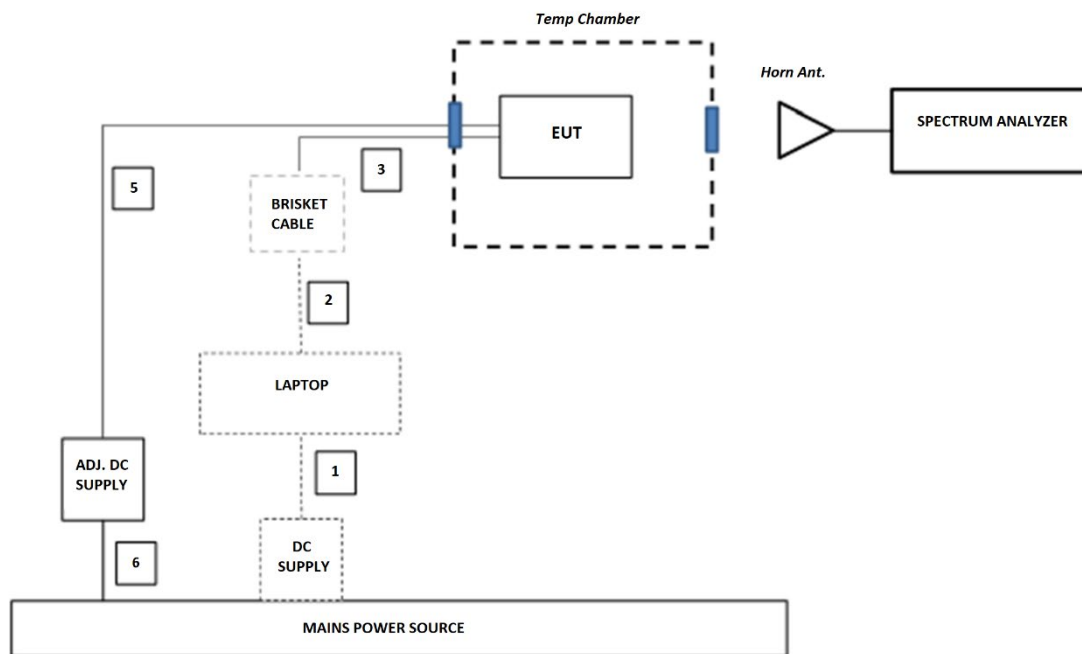

FAR-FIELD DISTANCE AND MEASUREMENT DISTANCE

The equipment under test was transmitting while connected to its integral antenna and placed on a turntable.

The measurement distance is in the far field per formula $2D^2/\lambda$ where D is the larger dimension of the antenna. For fundamental or band edge emissions, the largest far-field distance of either the EUT antenna or measurement antenna shall be used. For above 18 GHz spurious emissions, the far-field distance will be based on the measured antenna. In this case, the measurement antenna has the largest far-field distance. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest EIRP reading on the receive spectrum analyzer.

Frequency Range (GHz)	Wavelength (m)	Far Field Distance (m)	Measurement Distance Used (m)
18-26.5	0.0113	3.13	3.30
26.5-40	0.0075	2.61	3.00
40-50	0.0060	1.61	3.00
50-75	0.0040	1.05	3.00
75-110	0.0027	0.70	3.00
110-170	0.0018	0.46	1.00
170-200	0.0015	0.24	0.50

Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst-case polarization/positioning.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Local ID	Last Cal	Cal Due
Spectrum Analyzer, 2 Hz to 50 GHz	Rohde & Schwarz	FSW50	226791	02/10/2025	02/28/2026
Spectrum Analyzer, 2 Hz to 50 GHz	Rohde & Schwarz	FSW50	195710	02/18/2025	02/28/2026
Spectrum Analyzer, 2 Hz to 50 GHz	Rohde & Schwarz	FSW50	199181	02/14/2025	02/28/2026
Spectrum Analyzer, 2 Hz to 50 GHz	Rohde & Schwarz	FSW50	215756	02/17/2025	02/28/2026
EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	191429	02/15/2025	02/28/2026
EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	191430	02/08/2025	02/28/2026
Antenna, Horn 18-26.5 GHz	Com-Power	AH-826	222324	09/05/2023	09/30/2026
Antenna, Horn 26.5-40 GHz	Com-Power	AH-640	222327	08/16/2024	08/31/2026
Antenna, Horn 18-26.5 GHz	Com-Power	AH-826	222326	09/25/2023	09/30/2025
Antenna, Horn 26.5-40 GHz	Com-Power	AH-640	222328	09/25/2023	09/30/2025
Antenna, Horn 18-26.5 GHz	Com-Power	AH-826	220520	08/14/2024	08/31/2026
Antenna, Horn 26.5-40 GHz	Com-Power	AH-640	222329	08/16/2023	08/31/2025
Antenna, Double Ridge Guide Horn 1 to 18 GHz	ETS	3117	206805	07/11/2023	07/31/2025
Amplifier, 9kHz to 1GHz	Sonoma Instrument	310N	230856	02/27/2025	02/28/2026
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	174374	04/06/2024	04/31/2026
RF Filter Box, 1-18GHz	UL-FR1	NA	171013	03/04/2025	03/31/2026
Environmental Chamber	Cincinnati Sub Zero	ZPHS-8-3-5-SCT/WC	89097	04/03/2025	10/31/2025
Digital Multimeter	Fluke	115	246585	02/04/2025	02/28/2026
50V/3A Adj. DC Power Supply	Rigol	DP712	PRE0214721	CNR	CNR
Horn antenna, 33-50 GHz	CMI	HO22R	201518	08/08/2024	08/31/2025
LNA, 40-50 GHz	Eravant	SBL-3335033040-2222-E1	199504	08/20/2024	08/31/2025
Waveguide BandPass Filter, 40-50 GHz	Eravant	SWF-46308340-22-B1	222195	08/13/2024	08/31/2025
Horn antenna, 33-50 GHz	CMI	HO22R	201517	08/08/2024	08/31/2025
LNA, 40-50 GHz	Eravant	SBL-3335033040-2222-E1	215450	12/10/2024	12/31/2025
Waveguide BandPass Filter, 40-50 GHz	Eravant	SWF-46308340-22-B1	222196	08/04/2024	08/31/2025
50-75 GHz Horn	CMI	HO15R	210519	08/08/2024	08/31/2025
LNA, 50-75 GHz	VIVA TECH	VTLNA-15-6018-FB	202496	08/22/2024	08/31/2025
50 – 75 GHz Downconverter	VDI	WR15SAX-F	223772	08/07/2024	08/31/2025
75-110 GHz Horn	CMI	HO10R	201522	08/08/2024	08/31/2025
LNA, 75-110 GHz	Spacek Labs	SLW-22-5	202520	08/15/2024	08/31/2025
75 – 110 GHz Downconverter	VDI	WR10SAX-F	223987	08/07/2024	08/31/2025
110-170 GHz Horn	CMI	HO6R	201528	08/08/2024	08/31/2025
LNA 110-170 GHz	SAGE Millimeter, Inc.	SBL-1141741860-0606-EI	199832	08/16/2024	08/31/2025
110-170 GHz Downconverter	VDI	WR6.5SAX-F	223773	08/07/2024	08/31/2025
170-260 GHz Horn	CMI	HO4R	201525	08/08/2024	08/31/2025
170-260 GHz Downconverter	VDI	WR4.3SAX-F	223771	08/07/2024	08/31/2025
UL EMC Radiated Software	Version	Rev.9.5.18 Jan 2023			
mmWave FR2 Automation Tool Software	Version	V2025.3.0			

*Equipment was used to perform tests prior to the calibration due date.

All horn antennas at and above the 33-50 GHz band are standard gain horns. In accordance with ANSI C63.26:2015, Clause 4.5.3 (a), Standard gain horns need not be periodically recalibrated, unless damage or deterioration is suspected or known to have occurred. The connector shall be checked periodically for damage. If a standard gain horn is not periodically recalibrated, its critical dimensions (see Annex A of IEEE Std 1309TM-2013) shall be verified and documented on an annual basis.

UL measures the critical dimensions on an annual basis and checks for damage and deterioration before each test.

7. SUMMARY OF TEST RESULTS

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Bandwidth	N/A	Radiated	Compliant
2.1046 30.202(b)	Equivalent Isotropic Radiated Power (EIRP)	+43 dBm	Radiated	Compliant
2.1051 30.203(a)	Out-of-Band Emissions at the Band Edge	-13 dBm/MHz for all out-of-band emissions. -5 dBm/MHz from the band edge up to 10% of the channel BW	Radiated	Compliant
2.1051 2.957(f) 30.203(a)	Radiated Spurious Emissions	-13 dBm/MHz for all out-of-band emissions	Radiated	Compliant
30.203(d)(1) & (d)(2)	Radiated Spurious Emissions	-29 dBW/200 MHz & -35 dBW/200 MHz in 23.6 - 24.0 GHz for 24.25 - 24.45 GHz or 24.75 - 25.25 GHz bands	Radiated	Compliant
2.1055	Frequency Stability	Fundamental emissions are contained within allocated frequency band	Radiated	Compliant

8. APPLICABLE LIMITS AND TEST RESULTS

8.1. OCCUPIED BANDWIDTHS

RULE PART

FCC: §2.1049

LIMIT

For reporting purposes only.

TEST PROCEDURES

99% bandwidth measurement function of the signal analyzer was used to measure 99% occupied.

- RBW = 1 – 5% of OBW
- VBW $\geq 3 \times$ RBW
- Span = 1.5x of OBW, typical
- Detection = Peak
- Trace Mode = Max Hold
- Sweep = Auto Couple
- The trace was allowed to stabilize

KDB 842590 D01 Upper Microwave Flexible Use Service v01r03 Section 4.3
ANSI C63.26-2015 Clause 5.4.4

All modulations were investigated in SISO-Dual mode and only QPSK modulation in SISO and MIMO modes with Full RB allocation to determine worst case configuration. All modes of operation were investigated, and results are reported in this section.

To minimize report size, the 1CC to 4CC plots of Full RB, SISO-Dual, QPSK, Mid CH of both channel bandwidths are provided to demonstrate the test parameter setting on signal analyzer. The tabular data includes data for the other combinations of test modes.

RESULTS

See the following pages.

Employee IDs: 19459, 24303, 27294, 27780, 31925, 32226, 103479
Test Date: 05/23/2025 – 07/11/2025
Test Locations: 01-mmW-A, -B, -C & -D

8.1.1. OBW n258 SB1

RESULTS

n258 SB1, Full-RB


CCs Active	CH BW	Control System	Modulation	Channel	OBW (MHz)
1	50	SISO-DUAL	Pi/2 BPSK	Mid	46.03
		SISO-DUAL	QPSK	Low	46.06
				Mid	46.09
				High	45.97
				Mid	46.48
		Mid		46.09	
		SISO-DUAL		16QAM	Mid
		SISO-DUAL	64QAM	Mid	45.97
	100	SISO-DUAL	Pi/2 BPSK	Mid	92.32
		SISO-DUAL	QPSK	Low	93.43
				Mid	92.64
				High	92.53
				Mid	95.23
		Mid		92.77	
		SISO-DUAL		16QAM	Mid
SISO-DUAL		64QAM	Mid	92.36	
2	50	SISO-DUAL	Pi/2 BPSK	Mid	97.27
		SISO-DUAL	QPSK	Low	97.28
				Mid	97.21
				High	97.04
				Mid	97.02
		Mid		97.19	
		SISO-DUAL		16QAM	Mid
		SISO-DUAL	64QAM	Mid	96.52
	100	SISO-DUAL	Pi/2 BPSK	Mid	191.04
		SISO-DUAL	QPSK	Mid	191.44
		MIMO		Mid	193.17
		SISO		Mid	191.25
		SISO-DUAL		16QAM	Mid
		SISO-DUAL	64QAM	Mid	191.05

n258 SB1, Full-RB


CCs Active	CH BW	Control System	Modulation	Channel	OBW (MHz)
3	50	SISO-DUAL	Pi/2 BPSK	Mid	146.39
		SISO-DUAL	QPSK	Low	146.04
				Mid	146.16
				High	145.93
		MIMO		Mid	145.62
		SISO		Mid	146.32
		SISO-DUAL	16QAM	Mid	145.73
		SISO-DUAL	64QAM	Mid	145.73
4	50	SISO-DUAL	Pi/2 BPSK	Mid	196.19
		SISO-DUAL	QPSK	Low	195.84
				Mid	195.94
				High	195.77
		MIMO		Mid	195.05
		SISO		Mid	195.84
		SISO-DUAL	16QAM	Mid	195.30
		SISO-DUAL	64QAM	Mid	194.94

n258 SB1, Full-RB, SISO-Dual, QPSK, Mid-CH


1CC, 50 MHz CH BW

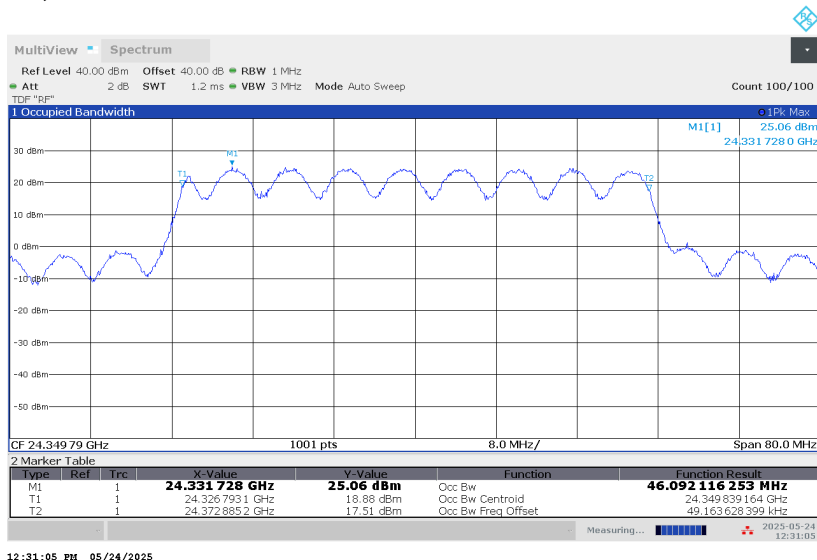


1CC, 100 MHz CH BW

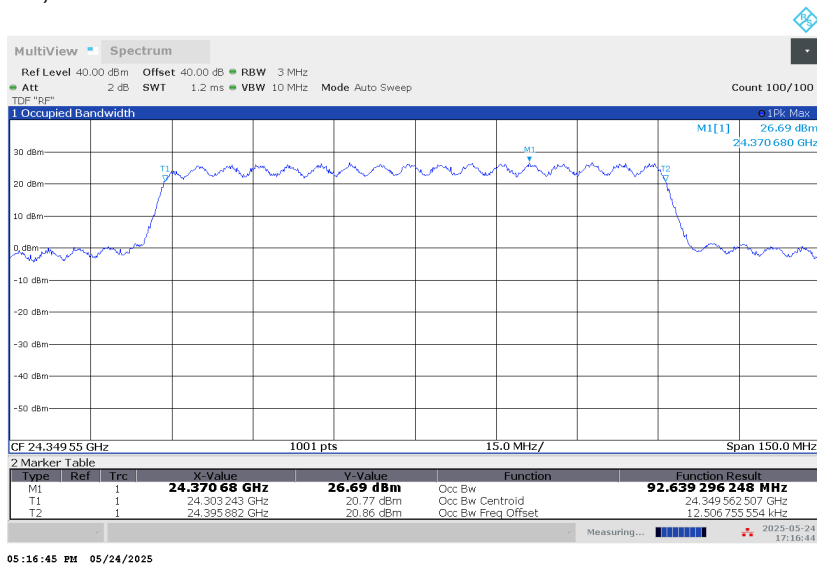

2CC, 50 MHz CH BW

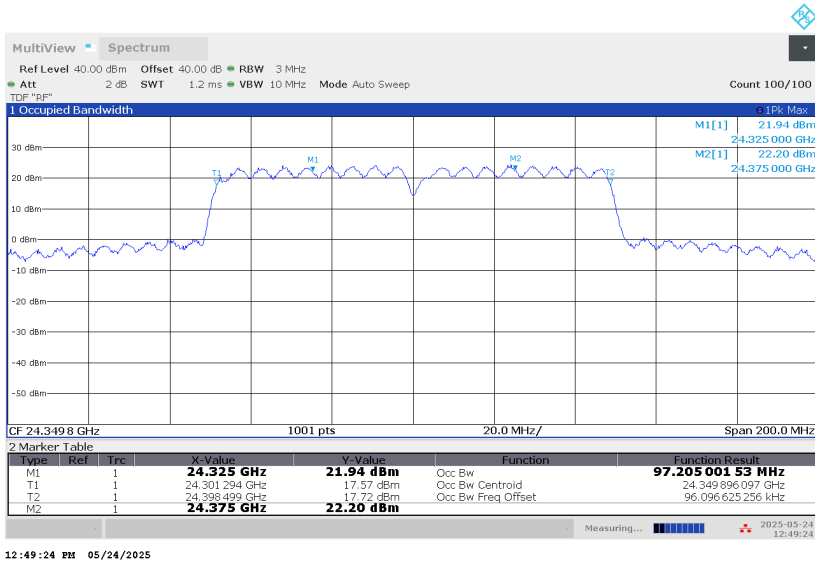


2CC, 100 MHz CH BW

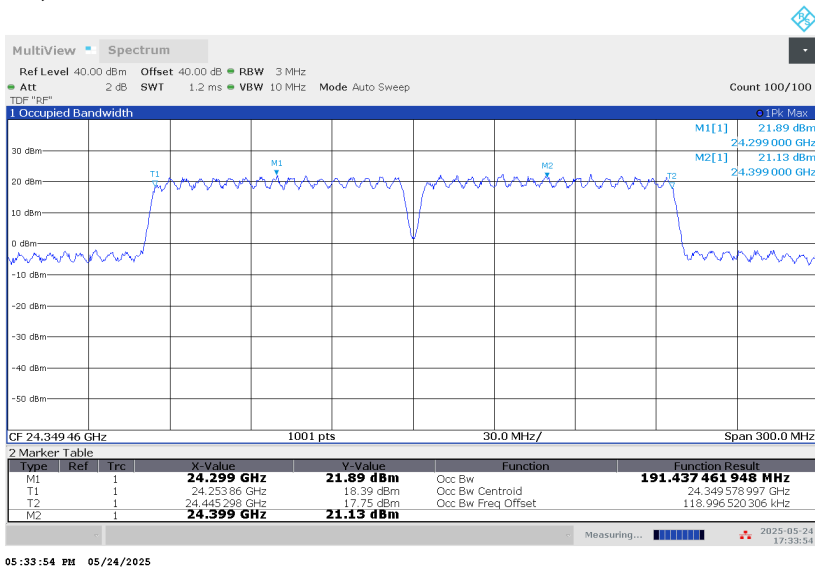

3CC, 50 MHz CH BW



4CC, 50 MHz CH BW

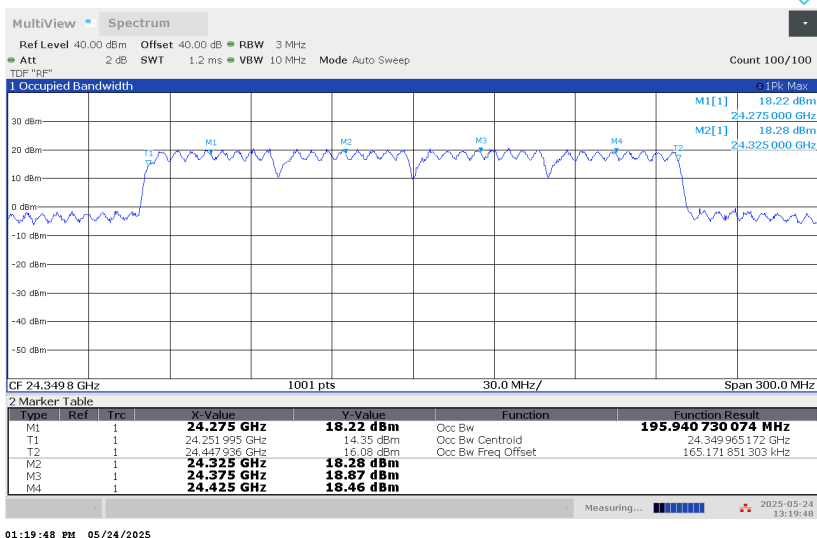

8.1.2. OBW n258 SB2

RESULTS



n258 SB2, Full-RB

CCs Active	CH BW	Control System	Modulation	Channel	OBW (MHz)
1	50	SISO-DUAL	Pi/2 BPSK	Mid	46.10
		SISO-DUAL	QPSK	Low	46.02
				Mid	46.12
				High	45.90
				Mid	46.21
		SISO		Mid	46.09
		SISO-DUAL	16QAM	Mid	46.08
		SISO-DUAL	64QAM	Mid	46.05
	100	SISO-DUAL	Pi/2 BPSK	Mid	92.18
		SISO-DUAL	QPSK	Low	91.87
				Mid	92.24
				High	91.86
				Mid	94.87
		SISO		Mid	92.60
		SISO-DUAL	16QAM	Mid	92.23
		SISO-DUAL	64QAM	Mid	92.13
2	50	SISO-DUAL	Pi/2 BPSK	Mid	97.14
		SISO-DUAL	QPSK	Low	96.91
				Mid	97.02
				High	96.66
				Mid	96.41
		SISO		Mid	96.94
		SISO-DUAL	16QAM	Mid	96.79
		SISO-DUAL	64QAM	Mid	96.61
	100	SISO-DUAL	Pi/2 BPSK	Mid	190.87
		SISO-DUAL	QPSK	Low	190.99
				Mid	190.92
				High	190.32
				Mid	193.07
		SISO		Mid	190.75
		SISO-DUAL	16QAM	Mid	190.69
		SISO-DUAL	64QAM	Mid	190.74


n258 SB2, Full-RB

CCs Active	CH BW	Control System	Modulation	Channel	OBW (MHz)
3	50	SISO-DUAL	Pi/2 BPSK	Mid	146.49
		SISO-DUAL	QPSK	Low	146.02
				Mid	146.28
				High	145.75
				Mid	145.35
		SISO	Mid	145.96	
		SISO-DUAL	16QAM	Mid	146.04
		SISO-DUAL	64QAM	Mid	145.94
	100	SISO-DUAL	Pi/2 BPSK	Mid	290.30
		SISO-DUAL	QPSK	Low	291.44
				Mid	290.53
				High	290.44
				Mid	292.62
		SISO	Mid	290.43	
SISO-DUAL		16QAM	Mid	290.75	
SISO-DUAL		64QAM	Mid	290.53	
4	50	SISO-DUAL	Pi/2 BPSK	Mid	195.86
		SISO-DUAL	QPSK	Low	195.12
				Mid	195.86
				High	195.26
				Mid	194.70
		SISO	Mid	195.22	
		SISO-DUAL	16QAM	Mid	195.35
		SISO-DUAL	64QAM	Mid	195.22
	100	SISO-DUAL	Pi/2 BPSK	Mid	389.52
		SISO-DUAL	QPSK	Low	389.49
				Mid	389.36
				High	389.39
				Mid	391.49
		SISO	Mid	389.85	
SISO-DUAL		16QAM	Mid	389.06	
SISO-DUAL		64QAM	Mid	389.28	


n258 SB2, Full-RB, SISO-Dual, QPSK, Mid-CH

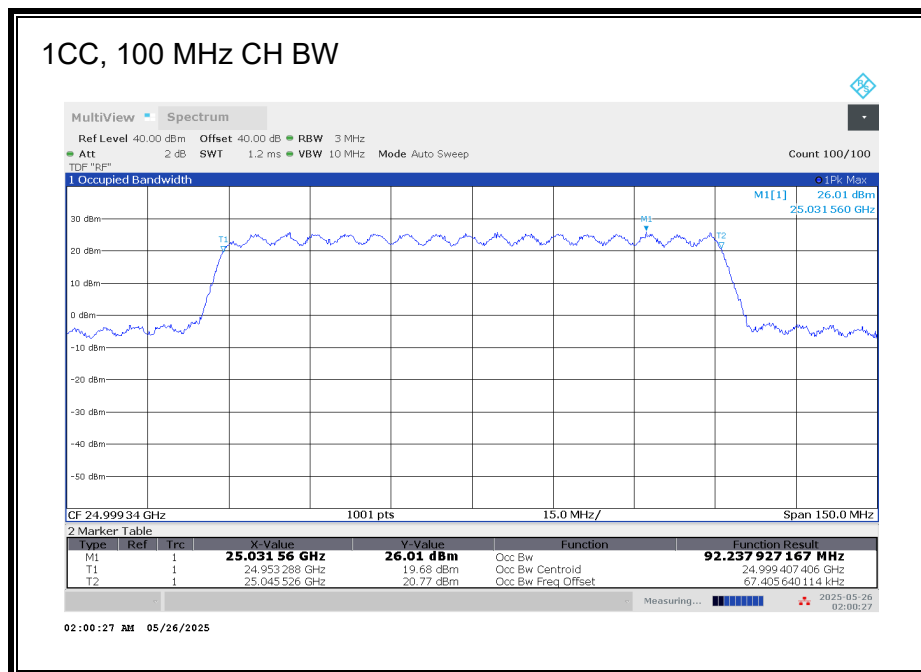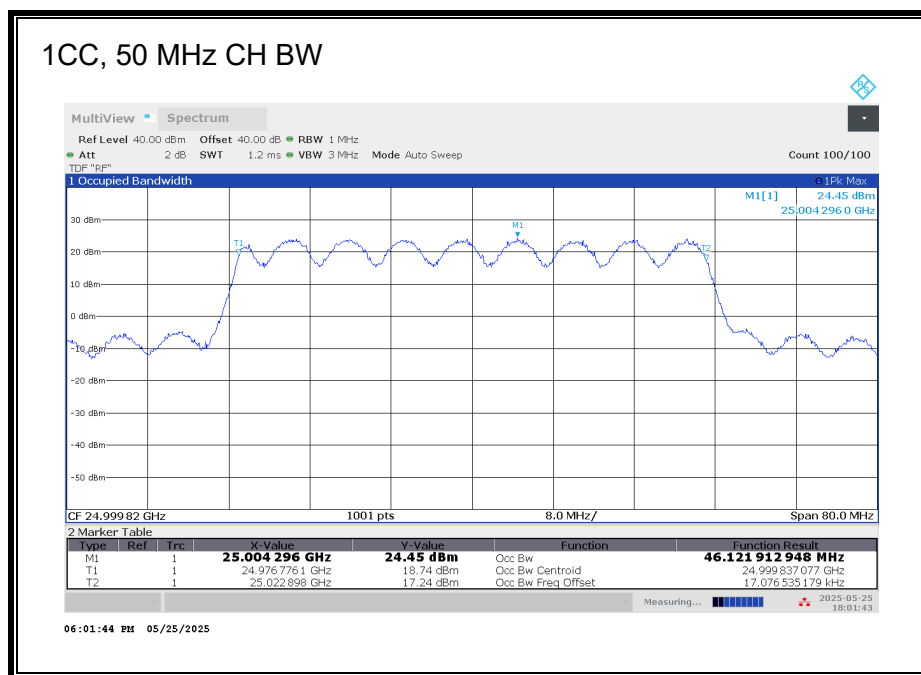


2CC, 50 MHz CH BW

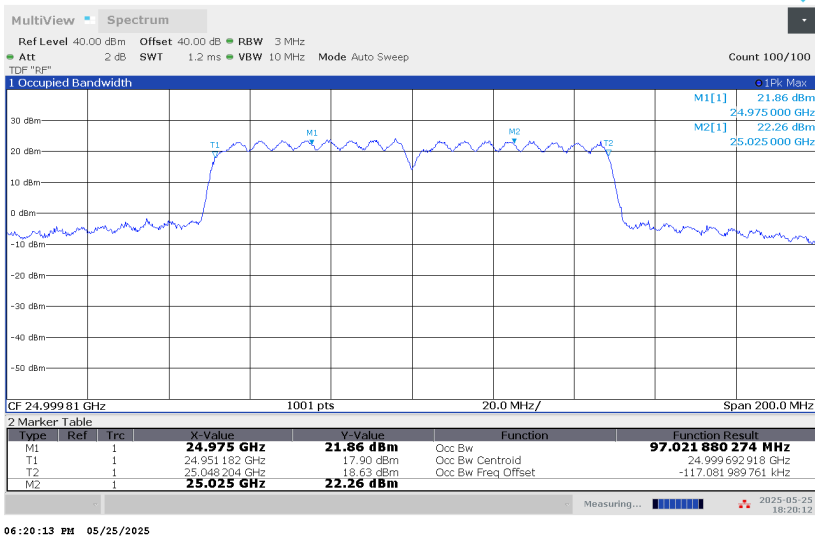


2CC, 100 MHz CH BW

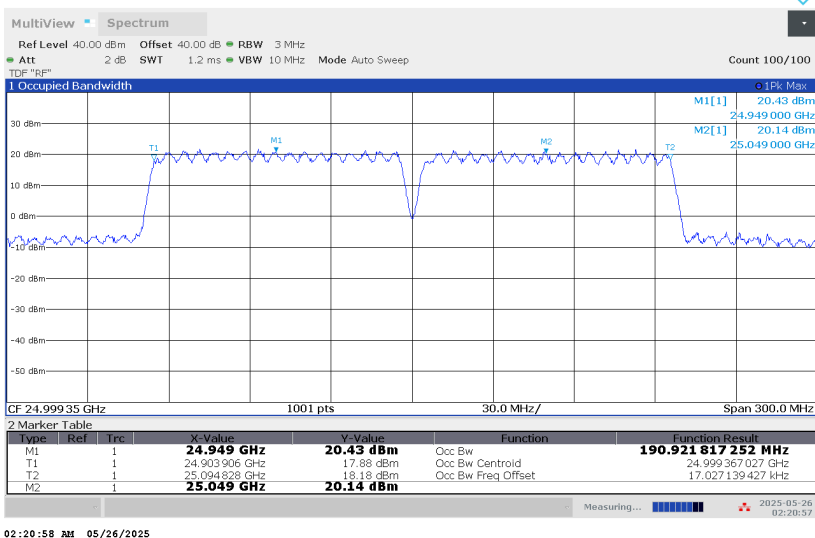


3CC, 50 MHz CH BW

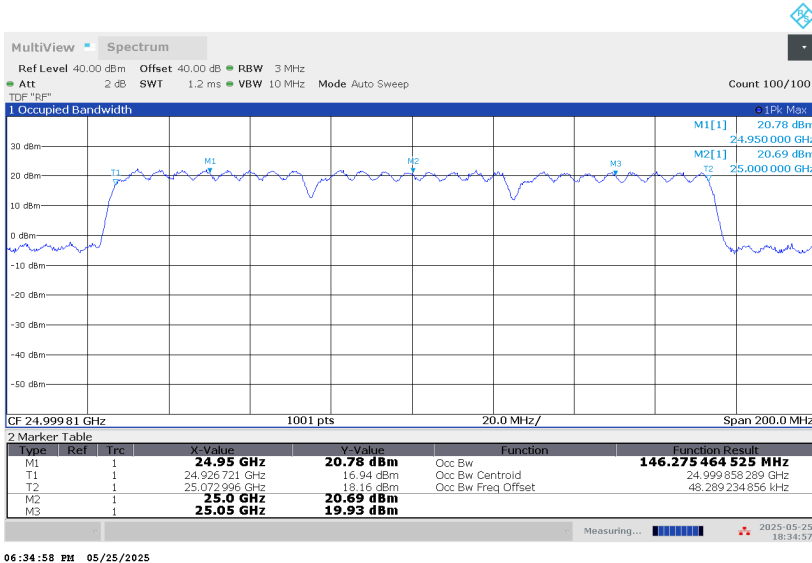

3CC, 100 MHz CH BW

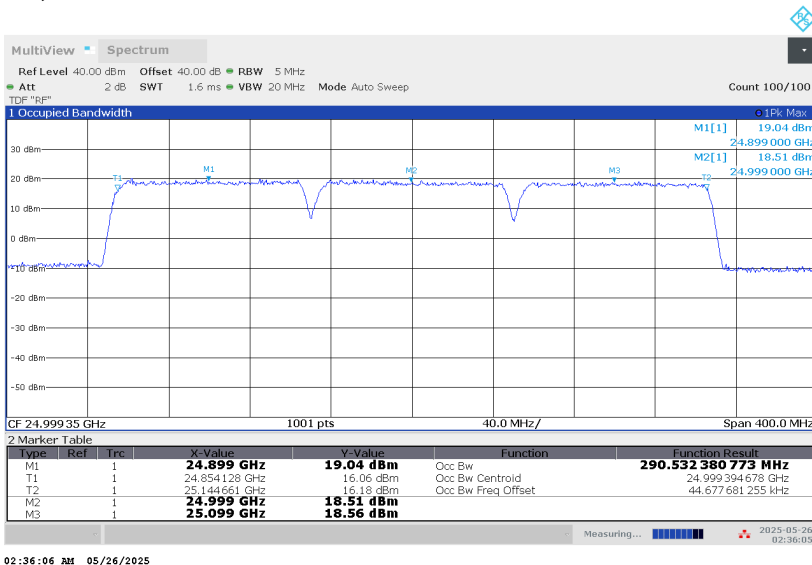

4CC, 50 MHz CH BW

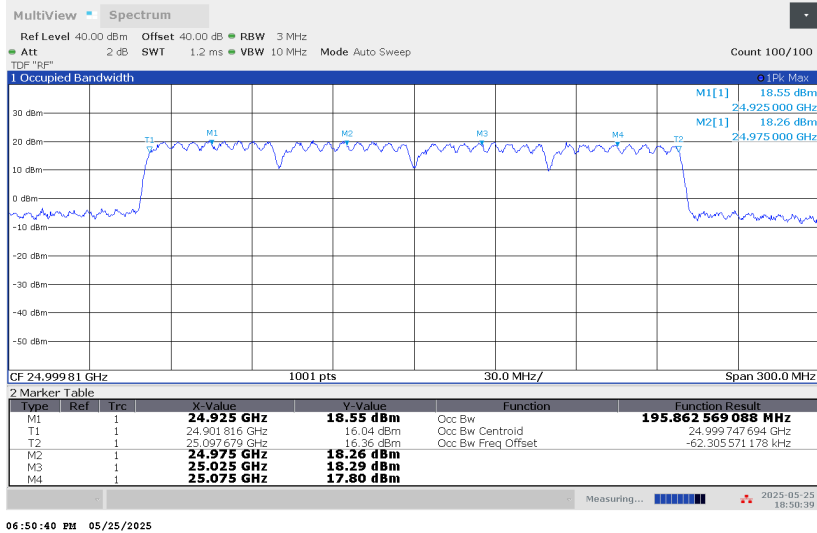

4CC, 100 MHz CH BW



8.1.3. OBW n261

RESULTS



n261, Full-RB

CCs Active	CH BW	Control System	Modulation	Channel	OBW (MHz)
1	50	SISO-DUAL	Pi/2 BPSK	Mid	46.38
		SISO-DUAL	QPSK	Low	46.35
				Mid	46.46
				High	46.44
				Mid	46.90
		MIMO	16QAM	Mid	46.08
		SISO		Mid	46.43
	SISO-DUAL	64QAM	Mid	46.32	
	100	SISO-DUAL	Pi/2 BPSK	Mid	92.87
		SISO-DUAL	QPSK	Low	93.35
				Mid	93.10
				High	92.48
				Mid	95.81
		MIMO	16QAM	Mid	92.85
SISO		Mid		93.07	
SISO-DUAL	64QAM	Mid	92.91		
2	50	SISO-DUAL	Pi/2 BPSK	Mid	97.87
		SISO-DUAL	QPSK	Low	97.68
				Mid	97.89
				High	97.75
				Mid	97.59
		MIMO	16QAM	Mid	97.42
		SISO		Mid	97.50
	SISO-DUAL	64QAM	Mid	97.15	
	100	SISO-DUAL	Pi/2 BPSK	Mid	191.94
		SISO-DUAL	QPSK	Low	191.99
				Mid	192.06
				High	191.29
				Mid	193.59
		MIMO	16QAM	Mid	191.36
SISO		Mid		191.86	
SISO-DUAL	64QAM	Mid	191.64		


n261, Full-RB

CCs Active	CH BW	Control System	Modulation	Channel	OBW (MHz)
3	50	SISO-DUAL	Pi/2 BPSK	Mid	147.21
		SISO-DUAL	QPSK	Low	147.05
				Mid	147.00
				High	147.12
				Mid	146.34
		SISO	Mid	146.42	
		SISO-DUAL	16QAM	Mid	146.57
		SISO-DUAL	64QAM	Mid	146.53
	100	SISO-DUAL	Pi/2 BPSK	Mid	291.39
		SISO-DUAL	QPSK	Low	291.92
				Mid	291.47
				High	290.78
				Mid	292.60
		SISO	Mid	290.69	
		SISO-DUAL	16QAM	Mid	291.43
		SISO-DUAL	64QAM	Mid	291.32
4	50	SISO-DUAL	Pi/2 BPSK	Mid	196.99
		SISO-DUAL	QPSK	Low	196.74
				Mid	196.69
				High	196.57
				Mid	195.81
		SISO	Mid	196.08	
		SISO-DUAL	16QAM	Mid	196.09
		SISO-DUAL	64QAM	Mid	195.91
	100	SISO-DUAL	Pi/2 BPSK	Mid	390.17
		SISO-DUAL	QPSK	Low	390.79
				Mid	390.14
				High	389.22
				Mid	391.33
		SISO	Mid	389.15	
		SISO-DUAL	16QAM	Mid	389.98
		SISO-DUAL	64QAM	Mid	389.89


n261, Full-RB, SISO-Dual, QPSK, Mid-CH

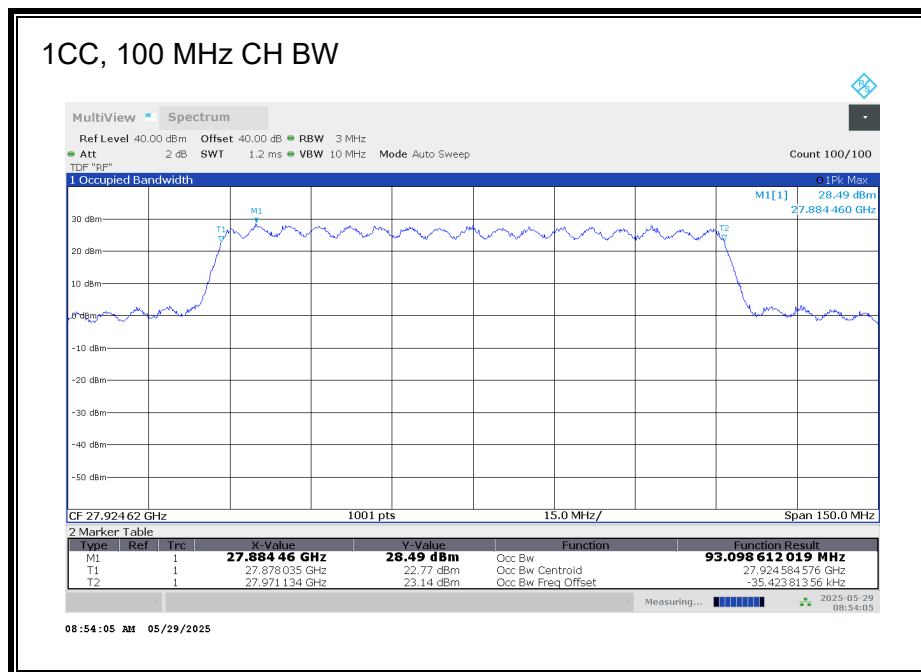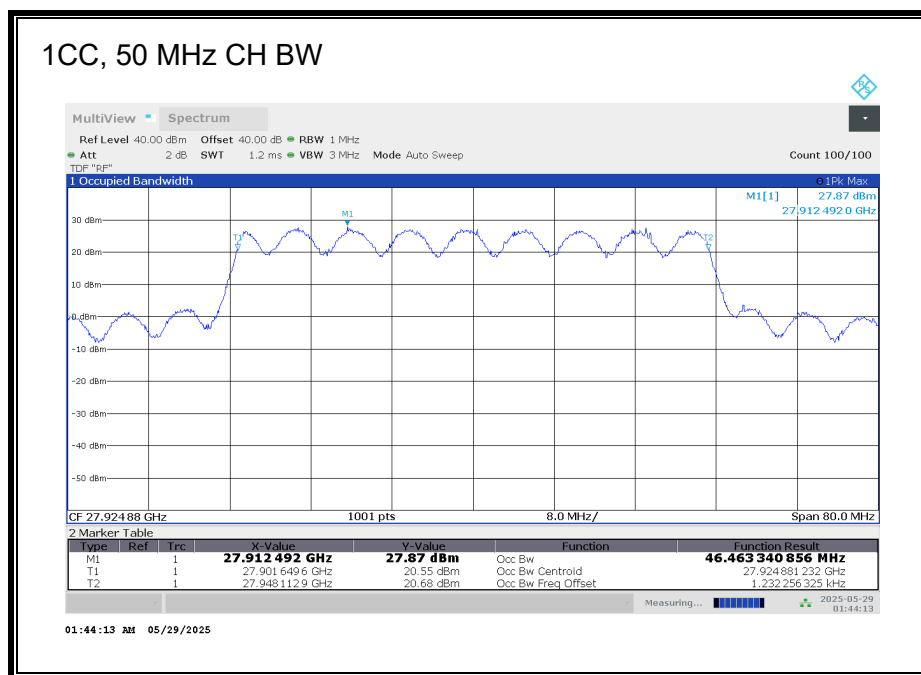


2CC, 50 MHz CH BW

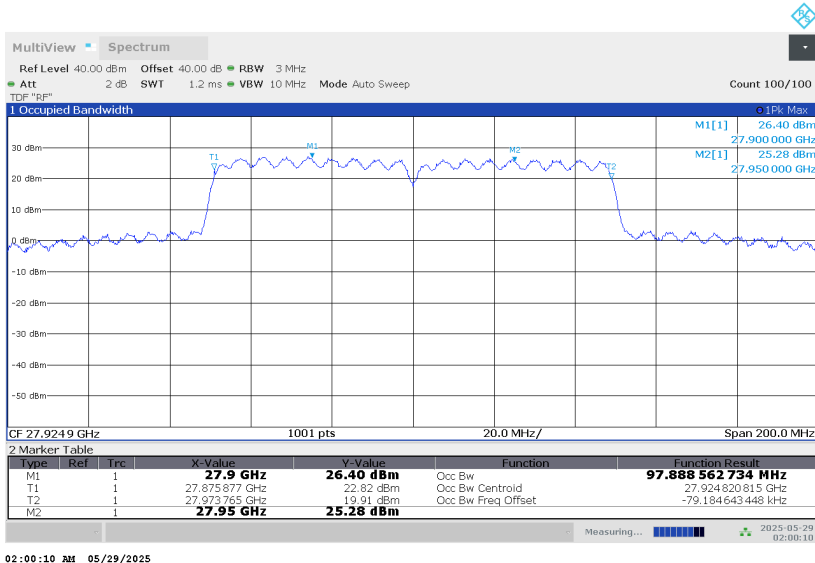


2CC, 100 MHz CH BW

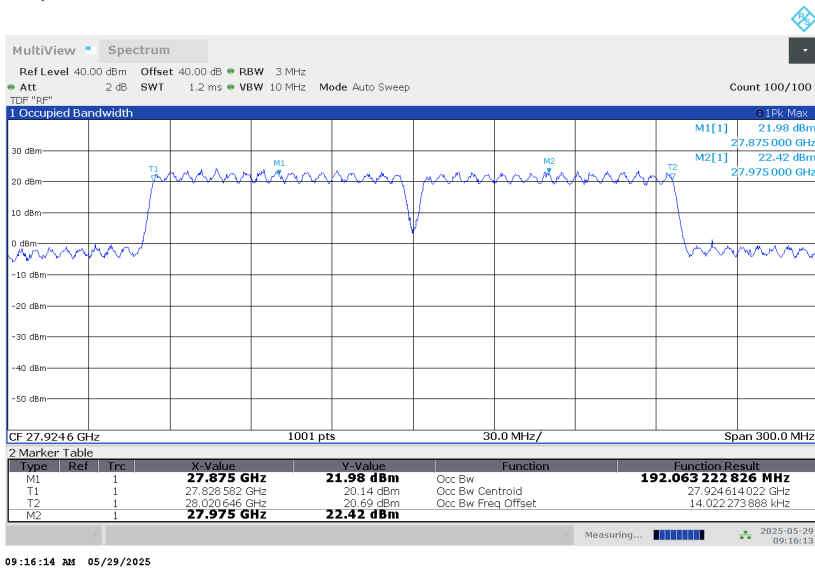


3CC, 50 MHz CH BW

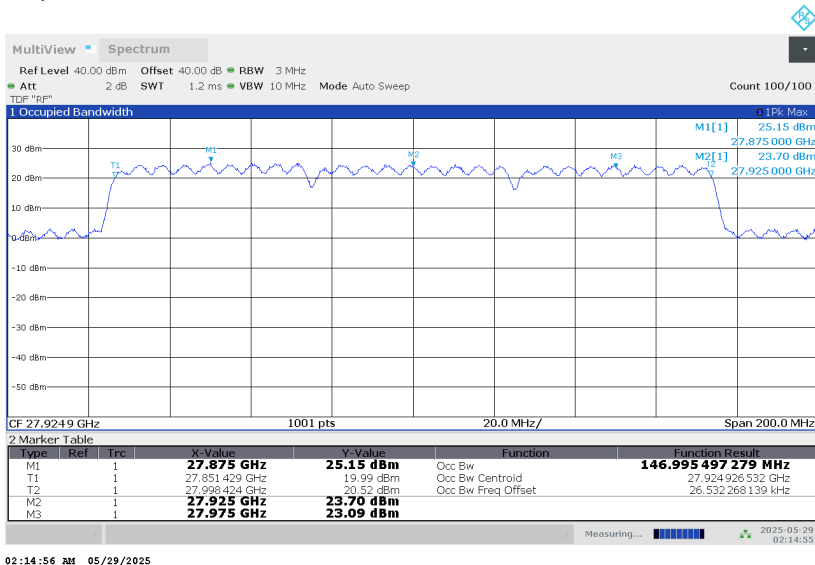


3CC, 100 MHz CH BW

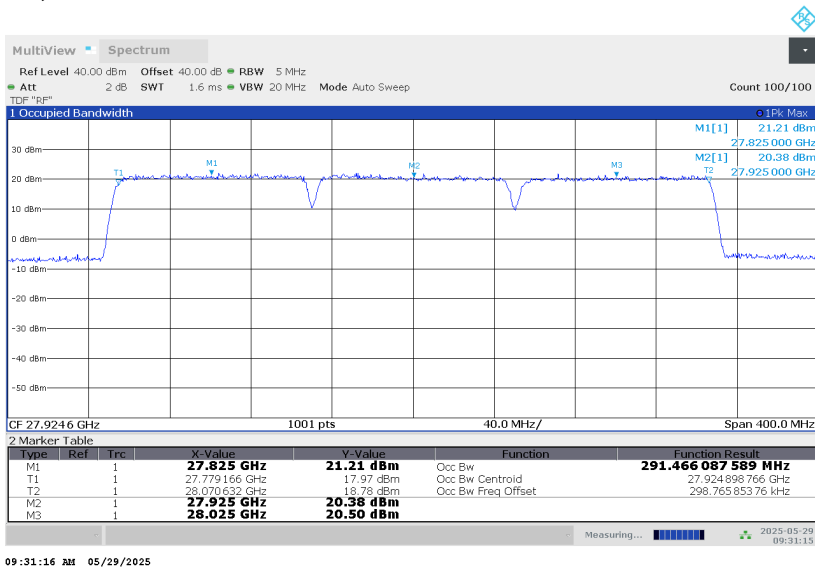

4CC, 50 MHz CH BW

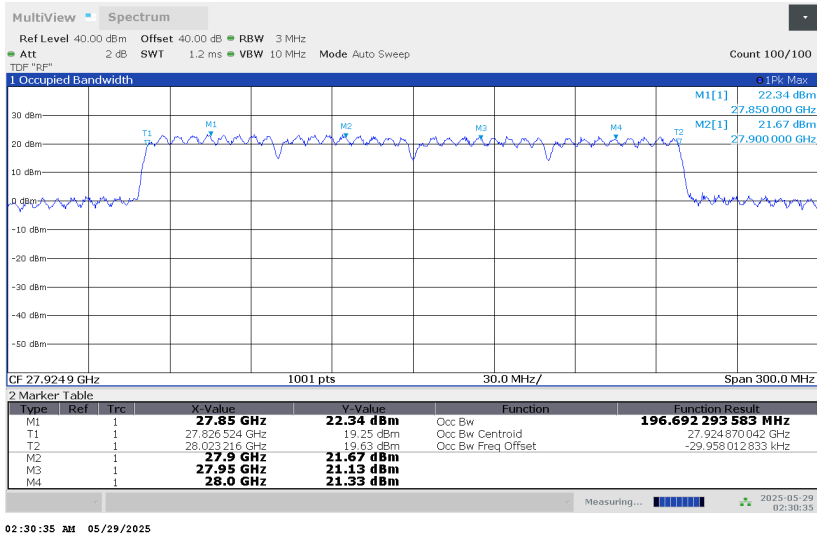

4CC, 100 MHz CH BW

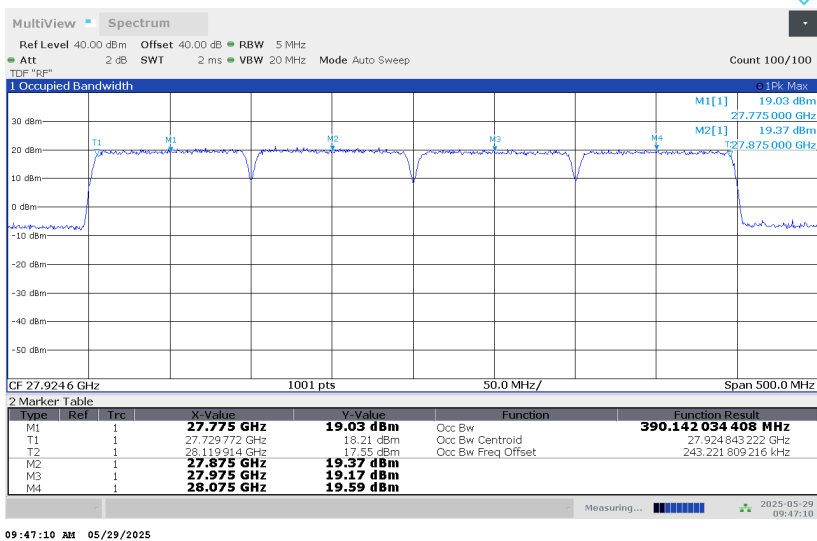

8.1.4. OBW n260

RESULTS



n260, Full-RB

CCs Active	CH BW	Control System	Modulation	Channel	OBW (MHz)
1	50	SISO-DUAL	Pi/2 BPSK	Mid	46.06
		SISO-DUAL	QPSK	Low	46.40
				Mid	46.10
				High	46.40
		MIMO		Mid	46.70
		SISO		Mid	46.07
		SISO-DUAL	16QAM	Mid	46.05
		SISO-DUAL	64QAM	Mid	46.01
	100	SISO-DUAL	Pi/2 BPSK	Mid	93.15
		SISO-DUAL	QPSK	Low	93.20
				Mid	93.40
				High	92.39
		MIMO		Mid	95.21
		SISO		Mid	92.86
		SISO-DUAL	16QAM	Mid	93.34
		SISO-DUAL	64QAM	Mid	93.17
2	50	SISO-DUAL	Pi/2 BPSK	Mid	97.48
		SISO-DUAL	QPSK	Low	97.67
				Mid	97.32
				High	98.03
		MIMO		Mid	97.60
		SISO		Mid	97.60
		SISO-DUAL	16QAM	Mid	97.18
		SISO-DUAL	64QAM	Mid	97.00
	100	SISO-DUAL	Pi/2 BPSK	Mid	192.18
		SISO-DUAL	QPSK	Low	191.95
				Mid	192.34
				High	191.06
		MIMO		Mid	193.26
		SISO		Mid	191.79
		SISO-DUAL	16QAM	Mid	192.02
		SISO-DUAL	64QAM	Mid	191.92


n260, Full-RB

CCs Active	CH BW	Control System	Modulation	Channel	OBW (MHz)
3	50	SISO-DUAL	Pi/2 BPSK	Mid	146.79
		SISO-DUAL	QPSK	Low	146.81
				Mid	146.51
				High	146.94
		MIMO		Mid	146.56
		SISO		Mid	146.53
		SISO-DUAL	16QAM	Mid	146.11
		SISO-DUAL	64QAM	Mid	146.39
	100	SISO-DUAL	Pi/2 BPSK	Mid	292.16
		SISO-DUAL	QPSK	Low	291.33
				Mid	291.97
				High	291.84
		MIMO		Mid	293.36
		SISO		Mid	291.86
		SISO-DUAL	16QAM	Mid	291.83
		SISO-DUAL	64QAM	Mid	291.65
4	50	SISO-DUAL	Pi/2 BPSK	Mid	196.38
		SISO-DUAL	QPSK	Low	196.43
				Mid	196.05
				High	196.73
		MIMO		Mid	195.98
		SISO		Mid	196.26
		SISO-DUAL	16QAM	Mid	195.91
		SISO-DUAL	64QAM	Mid	195.58
	100	SISO-DUAL	Pi/2 BPSK	Mid	391.07
		SISO-DUAL	QPSK	Low	390.67
				Mid	391.01
				High	390.59
		MIMO		Mid	392.06
		SISO		Mid	390.92
		SISO-DUAL	16QAM	Mid	390.71
		SISO-DUAL	64QAM	Mid	390.88


n260, Full-RB, SISO-Dual, QPSK, Mid-CH

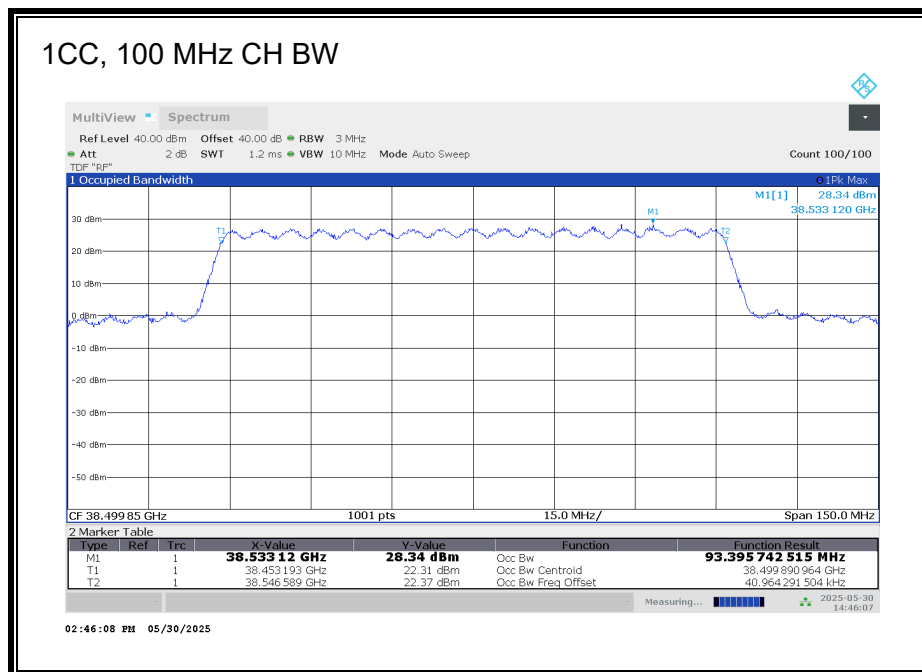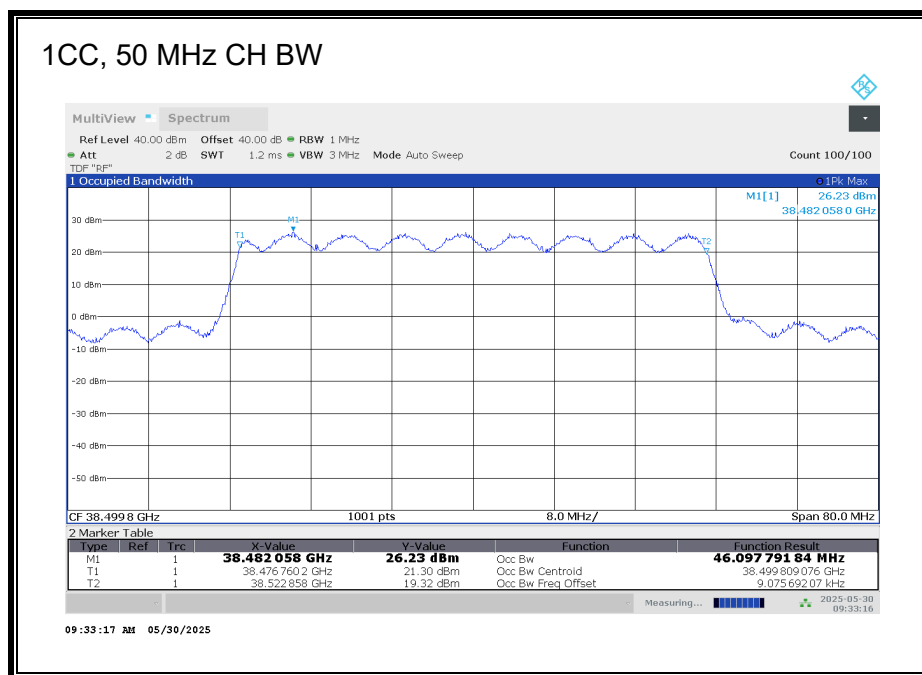


2CC, 50 MHz CH BW

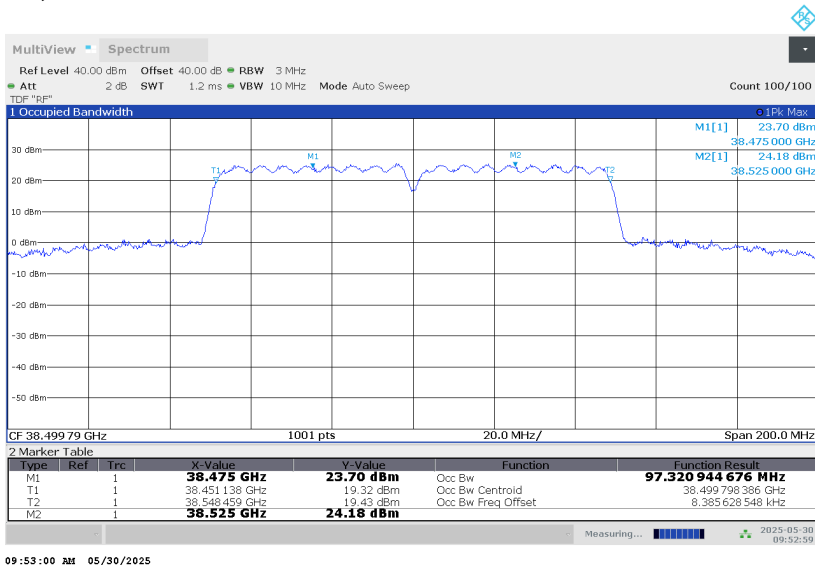


2CC, 100 MHz CH BW

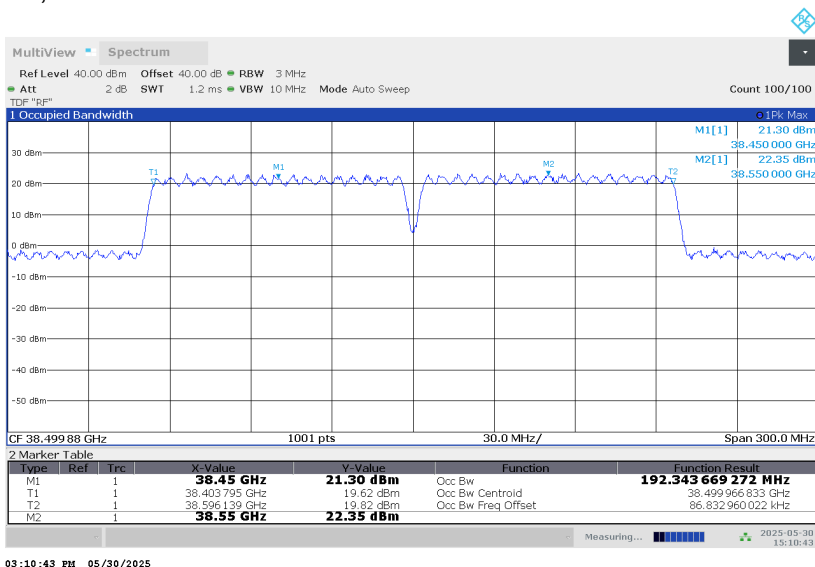


3CC, 50 MHz CH BW

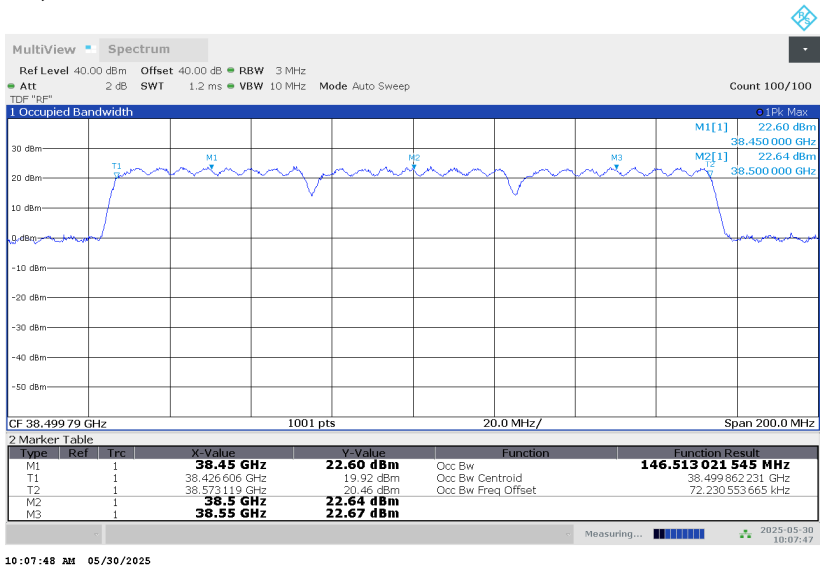

3CC, 100 MHz CH BW

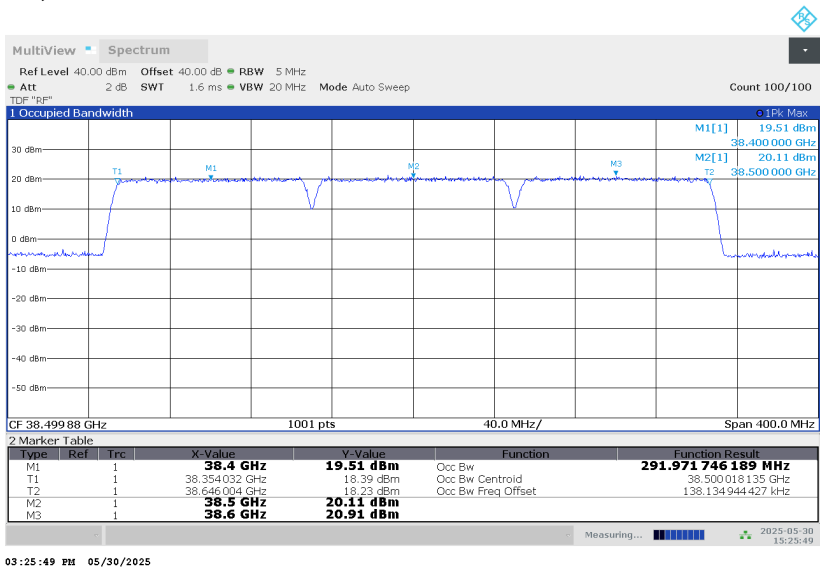

4CC, 50 MHz CH BW

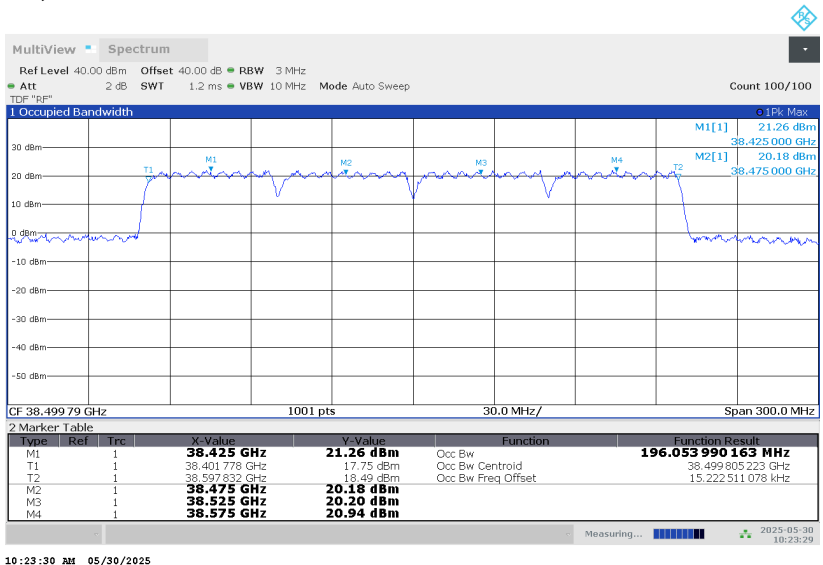

4CC, 100 MHz CH BW



8.2. EQUIVALENT ISOTROPIC RADIATED POWERS

RULE PART(S)

FCC: §2.1046, §30.202

LIMIT

30.202 (b) - For mobile stations, the average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

TEST PROCEDURES

Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.

- RBW = 1 – 5% of OBW
- VBW $\geq 3 \times$ RBW
- Span = 2x to 3x of OBW
- Number of measurement points in sweep $> 2 \times$ span / RBW
- Sweep Time = Auto Couple
- Detection = Power Averaging (RMS)
- Trace Mode = Average over 100 sweeps

KDB 842590 D01 Upper Microwave Flexible Use Service v01r03 Section 4.2
ANSI C63.26-2015 Clause 5.2, Clause 5.5, Clause 6.4, and Annex C.5.2

EIRP measurements of variable frequency bands were performed at the far field test distance listed on Section 5.

EIRP was calculated using the equations on ANSI C63.26-2015 Annex C.5.2. The total correction factors of horn antenna gain, cable loss and far-field path loss were calculated using equations C.8 and C.9, and pre-loaded into spectrum analyzer.

Sample calculation of EIRP:

$$\begin{aligned}\text{Total Correction Factor} &= \text{Cable Loss (dB)} - \text{Horn Ant Gain (dBi)} + \text{Path Loss (dB)} \\ &= 4 - 23 + 71 \\ &= 52 \text{ dB}\end{aligned}$$

$$\text{EIRP} = P_{\text{measured}}(\text{dBm}), \text{ where Total Correction Factor preloaded.}$$

In order to properly display signal level on the plots, the pre-loaded correction factors were intentionally lowered by 40 dB and an offset factor of 40 dB was applied on spectrum analyzer to compensate the true correction factors across frequency range of measurement.

Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst-case polarization/positioning.

The SISO mode operates with either the horizontal or vertical elements active. The SISO-Dual mode operates with both horizontal and vertical elements active at the same power per polarization as the SISO mode. Therefore, the SISO-Dual mode represents the highest total EIRP across both SISO and SISO-Dual modes, only spot checks were performed on the SISO mode to confirm this. Single RB (highest power) and full RB allocations were measured.

Pi/2 BPSK, QPSK, 16QAM and 64QAM modulations were all investigated in SISO-Dual mode. The highest power mode is QPSK for the modulations with SISO-Dual mode. Spot checks in QPSK modulation were performed on the SISO and MIMO modes. Full data is provided for these combinations.

To minimize report size, the 1CC to 4CC plots of Full RB, SISO-Dual, QPSK, any of tested low/mid/high CH with both channel bandwidths are provided to demonstrate the test parameter setting on signal analyzer. The tabular data includes data for the other combinations of test modes.

RESULTS

See the following pages.

Employee IDs: 19459, 24303, 27294, 27780, 31925, 32226, 103479
Test Date: 05/23/2025 – 07/11/2025
Test Locations: 01-mmW-A, -B, -C & -D

8.2.1. EIRP n258 SB1

SISO

CCs Active	CH BW	Modulation	Channel	Frequency	Ant Pol	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)		(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Mid	24.349	H	1/15	29.09	43	-13.91
	100			24.349		1/32	29.42	43	-13.58
2	50			24.324		1/15	22.33	43	-20.67
	100			24.299		1/32	22.49	43	-20.51
3	50			24.299		1/15	22.33	43	-20.67
4	50			24.274		1/15	22.26	43	-20.74

SISO-Dual

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	50	Pi/2 BPSK	Mid	24.349	1/15	32.05	43	-10.95
		QPSK	Low	24.253	1/0	27.72	43	-15.28
				24.274	1/15	31.13	43	-11.87
				24.275	32/0	27.84	43	-15.16
			Mid	24.349	1/15	32.15	43	-10.85
				24.350	32/0	27.90	43	-15.10
			High	24.424	1/15	31.69	43	-11.31
				24.447	1/31	27.41	43	-15.59
				24.425	32/0	27.42	43	-15.58
		16QAM	Mid	24.349	1/15	30.01	43	-12.99
		64QAM	Mid	24.349	1/15	28.04	43	-14.96
	100	Pi/2 BPSK	Mid	24.349	1/32	31.79	43	-11.21
		QPSK	Low	24.253	1/0	29.55	43	-13.45
				24.299	1/32	32.20	43	-10.80
				24.299	64/0	27.88	43	-15.12
			Mid	24.349	1/32	32.26	43	-10.74
				24.350	64/1	27.95	43	-15.05
			High	24.399	1/32	32.08	43	-10.92
				24.447	1/65	27.04	43	-15.96
				24.401	64/2	27.58	43	-15.42
		16QAM	Mid	24.349	1/32	30.31	43	-12.69
		64QAM	Mid	24.349	1/32	27.75	43	-15.25
2	50	QPSK	Low	24.253	1/0	23.41	43	-19.59
				24.275	32/0	27.22	43	-15.78
			Mid	24.303	1/0	23.81	43	-19.19
				24.324	1/15	25.38	43	-17.62
				24.347	1/31	23.71	43	-19.29
			High	24.397	1/31	23.58	43	-19.42
				24.375	32/0	27.11	43	-15.89
	100	Pi/2 BPSK	Mid	24.299	64/1	27.25	43	-15.75
		QPSK	Low	24.253	1/0	24.96	43	-18.04
				24.253	1/0	24.90	43	-18.10
			Mid	24.299	1/32	25.29	43	-17.71
				24.347	1/65	22.68	43	-20.32
				24.299	64/1	27.18	43	-15.82
			High	24.347	1/65	22.85	43	-20.15
		16QAM	Mid	24.299	64/1	25.77	43	-17.23
		64QAM	Mid	24.299	64/1	23.71	43	-19.29



SISO-Dual

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
3	50	QPSK	Low	24.253	1/0	23.35	43	-19.65
				24.275	32/0	27.20	43	-15.80
			Mid	24.278	1/0	23.88	43	-19.12
				24.299	1/15	25.31	43	-17.69
				24.322	1/31	23.55	43	-19.45
			High	24.347	1/31	23.57	43	-19.43
				24.325	32/0	27.11	43	-15.89
4	50	QPSK	Low	24.253	1/0	23.27	43	-19.73
				24.275	32/0	27.15	43	-15.85
			Mid	24.252	1/0	23.82	43	-19.18
				24.274	1/15	25.17	43	-17.83
				24.297	1/31	23.48	43	-19.52
			High	24.297	1/31	23.65	43	-19.35
				24.275	32/0	27.15	43	-15.85



MIMO

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Low	24.275	32/0	25.35	43	-17.65
			Mid	24.349	1/15	29.14	43	-13.86
				24.350	32/0	25.87	43	-17.13
			High	24.425	32/0	25.70	43	-17.30
	100		Mid	24.350	1/33	28.30	43	-14.70
				24.350	66/0	25.48	43	-17.52
2	50	QPSK	Low	24.275	32/0	24.91	43	-18.09
			Mid	24.324	1/15	25.50	43	-17.50
				24.325	32/0	25.30	43	-17.70
			High	24.375	32/0	25.39	43	-17.61
	100		Mid	24.301	1/33	24.45	43	-18.55
				24.300	66/0	24.80	43	-18.20
3	50	QPSK	Low	24.275	32/0	24.97	43	-18.03
			Mid	24.299	1/15	25.41	43	-17.59
				24.300	32/0	25.15	43	-17.85
			High	24.325	32/0	25.22	43	-17.78
4	50	QPSK	Low	24.275	32/0	25.08	43	-17.92
			Mid	24.274	1/15	25.35	43	-17.65
				24.275	32/0	25.21	43	-17.79
			High	24.275	32/0	25.28	43	-17.72


n258 SB1, Full-RB, SISO-Dual, QPSK, 1CC

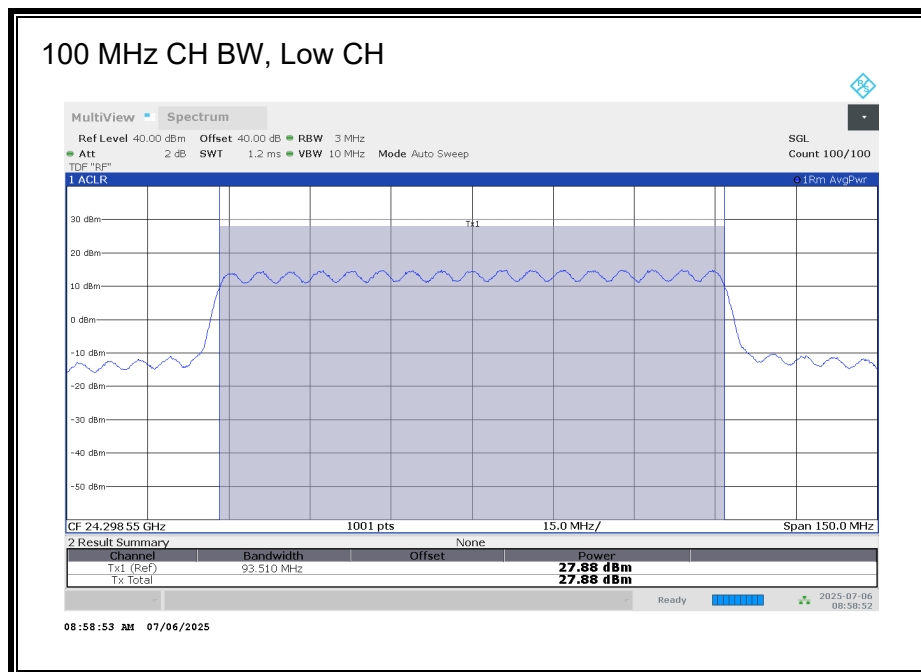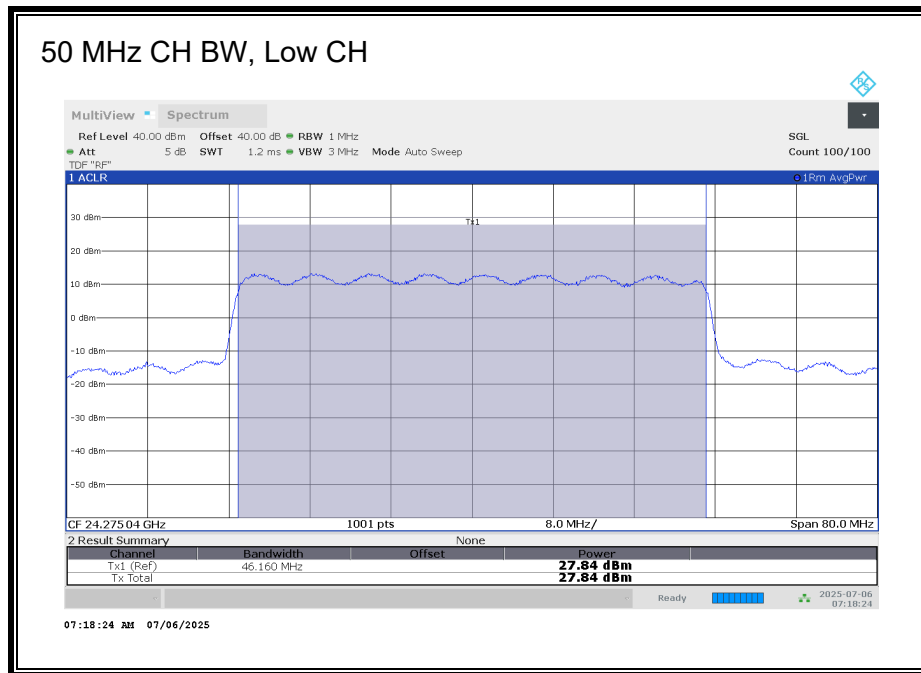


n258 SB1, Full-RB, SISO-Dual, QPSK, 2CC

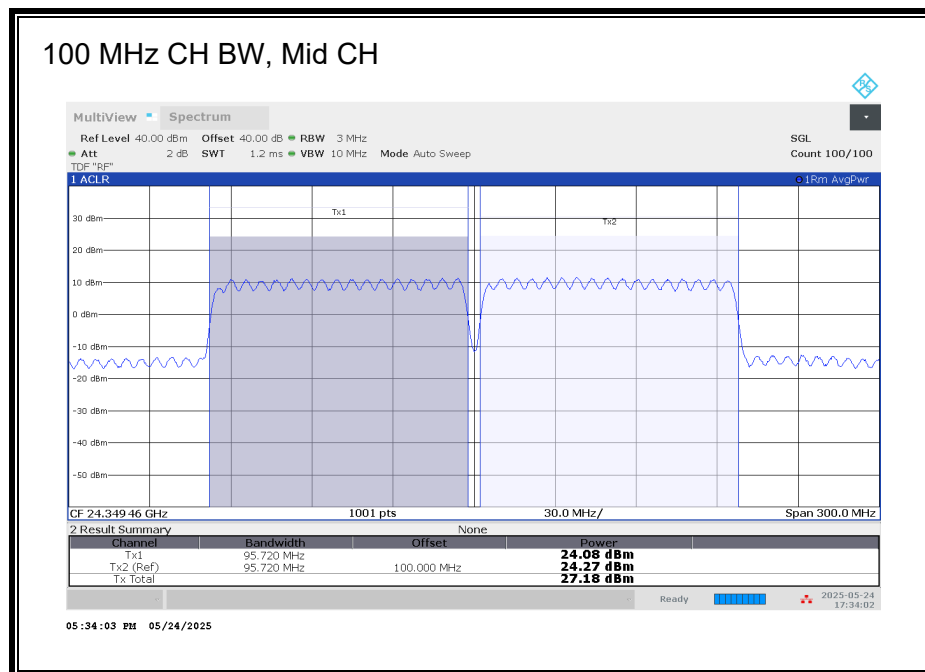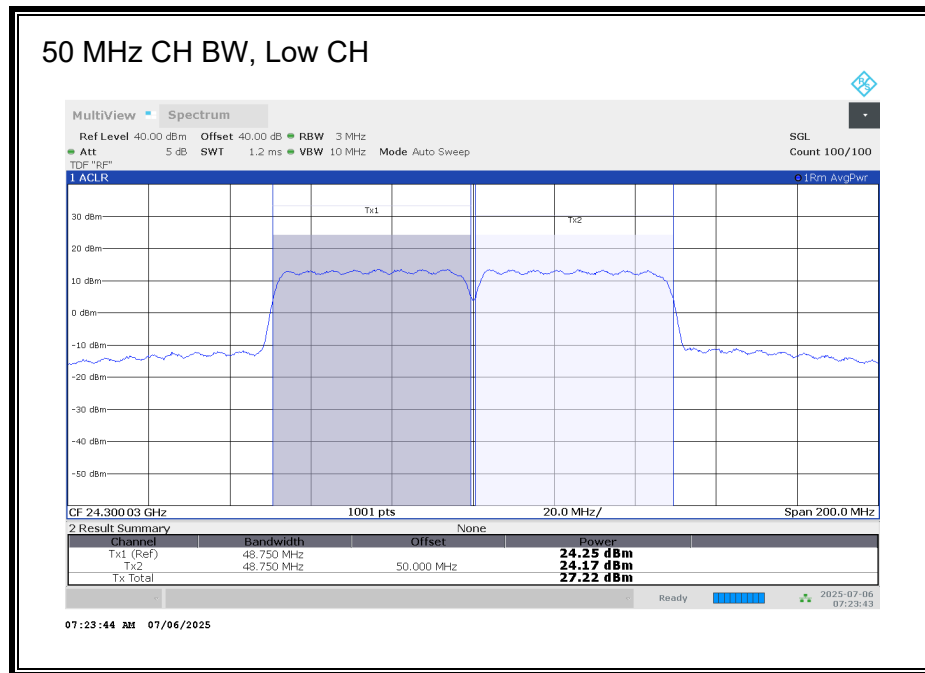

n258 SB1, Full-RB, SISO-Dual, QPSK, 3CC

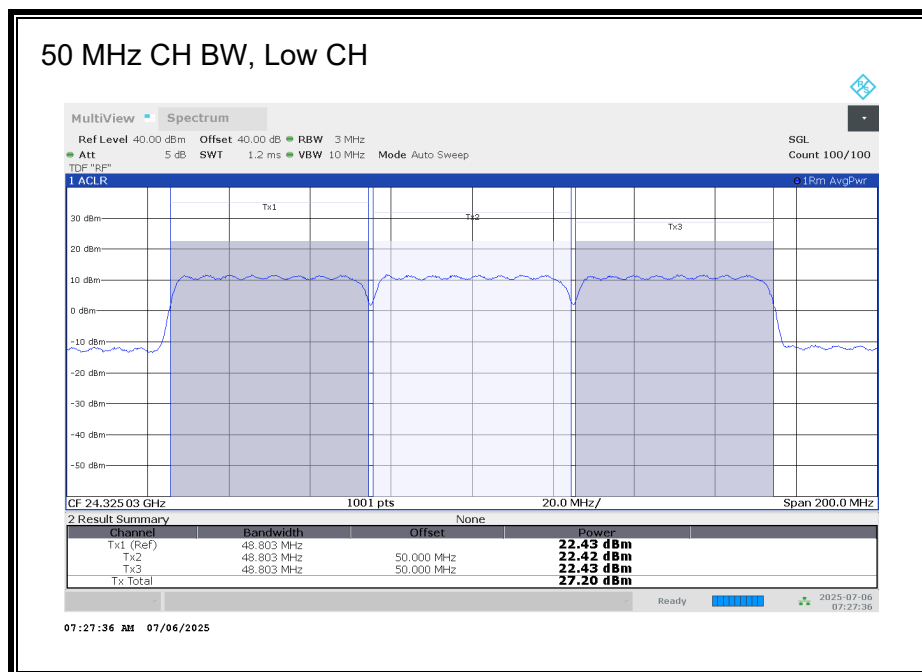

n258 SB1, Full-RB, SISO-Dual, QPSK, 4CC

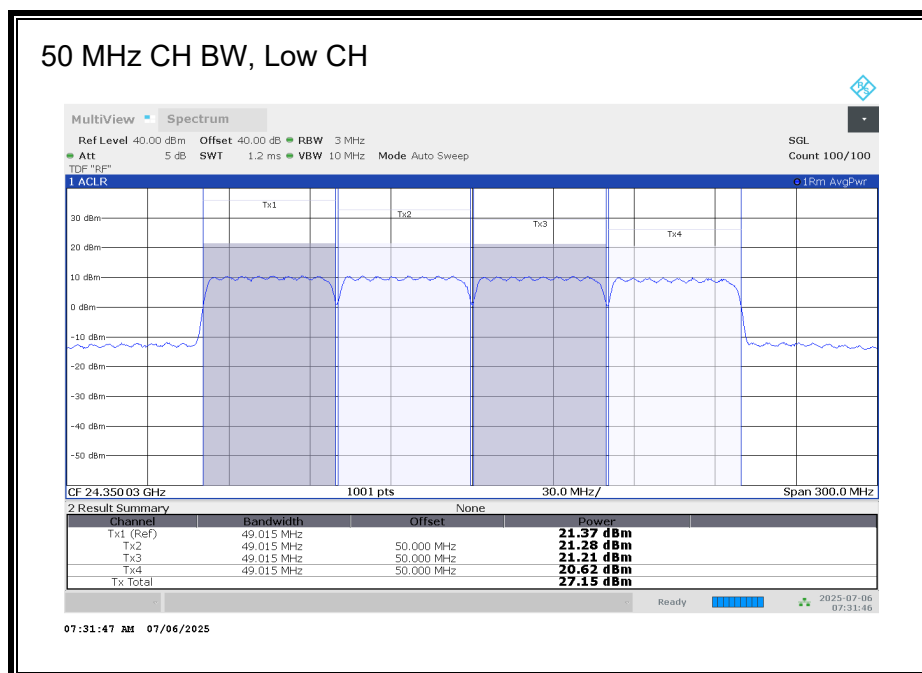

8.2.2. EIRP n258 SB2

SISO

CCs Active	CH BW	Modulation	Channel	Frequency	Ant Pol	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)		(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Mid	24.999	H	1/15	27.99	43	-15.01
	100			24.999		1/32	28.28	43	-14.72
2	50			24.974		1/15	22.61	43	-20.39
	100			24.949		1/32	22.41	43	-20.59
3	50			24.949		1/15	22.43	43	-20.57
	100			24.899		1/32	22.32	43	-20.68
4	50			24.924		1/15	22.44	43	-20.56
	100			24.849		1/32	22.40	43	-20.60

SISO-Dual

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	Pi/2 BPSK	Mid	24.999	1/15	29.70	43	-13.30
		QPSK	Low	24.753	1/0	27.92	43	-15.08
				24.774	1/15	30.11	43	-12.89
				24.775	32/0	27.00	43	-16.00
				24.999	1/15	29.75	43	-13.25
			Mid	25.000	32/0	27.82	43	-15.18
				25.224	1/15	30.63	43	-12.37
				25.247	1/31	27.05	43	-15.95
				25.225	32/0	27.66	43	-15.34
		16QAM	Mid	24.999	1/15	28.79	43	-14.21
		64QAM		24.999	1/15	26.71	43	-16.29
	100	Pi/2 BPSK	Mid	24.999	1/32	29.92	43	-13.08
		QPSK	Low	24.753	1/0	28.85	43	-14.15
				24.799	1/32	30.05	43	-12.95
				24.799	64/0	28.41	43	-14.59
			Mid	24.999	1/32	29.95	43	-13.05
			High	25.199	1/32	30.09	43	-12.91
				25.247	1/65	28.10	43	-14.90
				25.202	64/2	28.01	43	-14.99
		16QAM	Mid	24.999	1/32	28.83	43	-14.17
		64QAM		24.999	1/32	26.55	43	-16.45
2	50	QPSK	Low	24.753	1/0	24.03	43	-18.97
				24.775	32/0	26.36	43	-16.64
			Mid	24.953	1/0	23.51	43	-19.49
				24.974	1/15	24.35	43	-18.65
				24.997	1/31	23.36	43	-19.64
				25.197	1/31	22.93	43	-20.07
			High	25.175	32/0	27.04	43	-15.96
				24.949	64/1	27.40	43	-15.60
	100	Pi/2 BPSK	Mid	24.949	64/1	27.40	43	-15.60
		QPSK	Low	24.753	1/0	26.01	43	-16.99
				24.799	64/0	27.77	43	-15.23
			Mid	24.903	1/0	25.46	43	-17.54
				24.949	1/32	24.12	43	-18.88
				24.997	1/65	23.72	43	-19.28
				25.147	1/65	23.67	43	-19.33
			25.102	64/2	27.26	43	-15.74	
		16QAM	Mid	24.949	64/1	26.00	43	-17.00
		64QAM		24.949	64/1	23.94	43	-19.06



SISO-Dual

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
3	50	QPSK	Low	24.753	1/0	23.94	43	-19.06
				24.775	32/0	26.40	43	-16.60
			Mid	24.928	1/0	23.74	43	-19.26
				24.949	1/15	24.22	43	-18.78
				24.972	1/31	23.62	43	-19.38
			High	25.147	1/31	22.75	43	-20.25
				25.125	32/0	26.98	43	-16.02
	100	QPSK	Low	24.753	1/0	25.95	43	-17.05
				24.799	64/0	26.07	43	-16.93
			Mid	24.853	1/0	25.55	43	-17.45
				24.899	1/32	24.14	43	-18.86
				24.947	1/65	23.90	43	-19.10
			High	25.047	1/65	23.57	43	-19.43
				25.002	64/2	25.80	43	-17.20
4	50	QPSK	Low	24.753	1/0	23.82	43	-19.18
				24.775	32/0	26.49	43	-16.51
			Mid	24.902	1/0	23.61	43	-19.39
				24.924	1/15	24.38	43	-18.62
				24.947	1/31	23.42	43	-19.58
			High	25.097	1/31	22.69	43	-20.31
				25.075	32/0	26.81	43	-16.19
	100	Pi/2 BPSK	Mid	24.849	64/1	26.09	43	-16.91
		QPSK	Low	24.753	1/0	25.75	43	-17.25
				24.799	64/0	26.04	43	-16.96
			Mid	24.803	1/0	25.54	43	-17.46
				24.849	1/32	24.17	43	-18.83
				24.897	1/65	23.84	43	-19.16
			High	24.947	1/65	23.47	43	-19.53
				24.902	64/2	26.03	43	-16.97
		16QAM	Mid	24.849	64/1	24.02	43	-18.98
		64QAM	Mid	24.849	64/1	21.93	43	-21.07


MIMO

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Low	24.775	32/0	26.08	43	-16.92
			Mid	24.999	1/15	27.84	43	-15.16
				25.000	32/0	25.85	43	-17.15
	High		25.225	32/0	26.12	43	-16.88	
	100		Low	24.801	66/0	24.85	43	-18.15
			Mid	25.000	1/33	28.18	43	-14.82
				25.001	66/0	25.32	43	-17.68
High		25.201	66/0	25.07	43	-17.93		
2	50	QPSK	Low	24.775	32/0	25.52	43	-17.48
			Mid	24.974	1/15	24.44	43	-18.56
				24.975	32/0	25.43	43	-17.57
	High		25.175	32/0	25.56	43	-17.44	
	100		Low	24.801	66/0	24.22	43	-18.78
			Mid	24.951	1/33	24.42	43	-18.58
				24.951	66/0	24.77	43	-18.23
High		25.101	66/0	24.51	43	-18.49		
3	50	QPSK	Low	24.775	32/0	25.28	43	-17.72
			Mid	24.949	1/15	24.27	43	-18.73
				24.950	32/0	25.34	43	-17.66
	High		25.125	32/0	25.39	43	-17.61	
	100		Low	24.801	66/0	22.50	43	-20.50
			Mid	24.901	1/33	24.37	43	-18.63
				24.901	66/0	23.38	43	-19.62
High		25.001	66/0	23.03	43	-19.97		
4	50	QPSK	Low	24.775	32/0	25.32	43	-17.68
			Mid	24.924	1/15	24.42	43	-18.58
				24.925	32/0	25.40	43	-17.60
	High		25.075	32/0	25.30	43	-17.70	
	100		Low	24.801	66/0	22.25	43	-20.75
			Mid	24.851	1/33	24.35	43	-18.65
				24.851	66/0	23.36	43	-19.64
High		24.901	66/0	22.97	43	-20.03		

n258 SB2, Full-RB, SISO-Dual, QPSK, Low CH

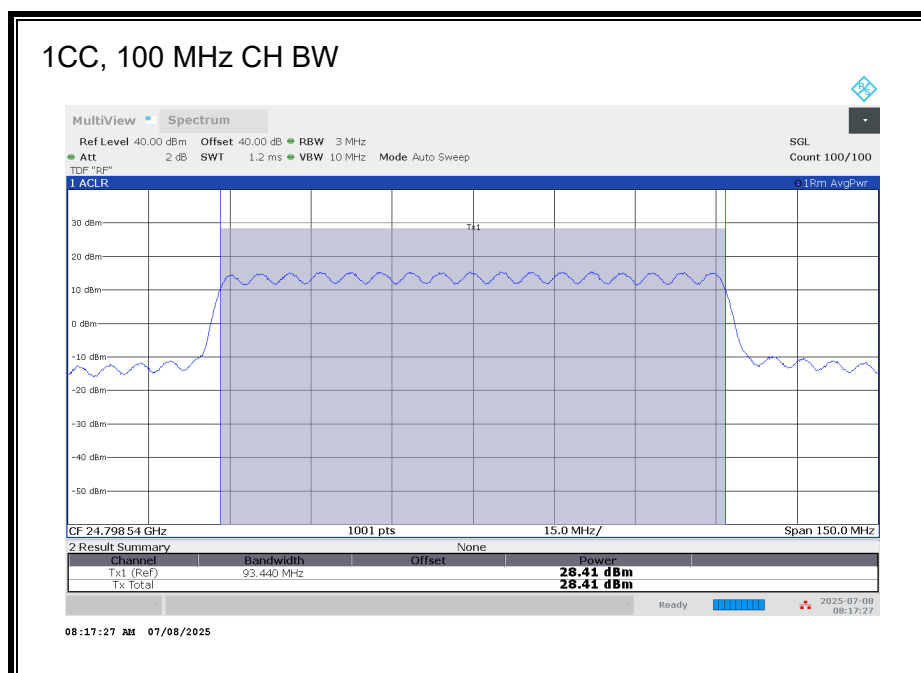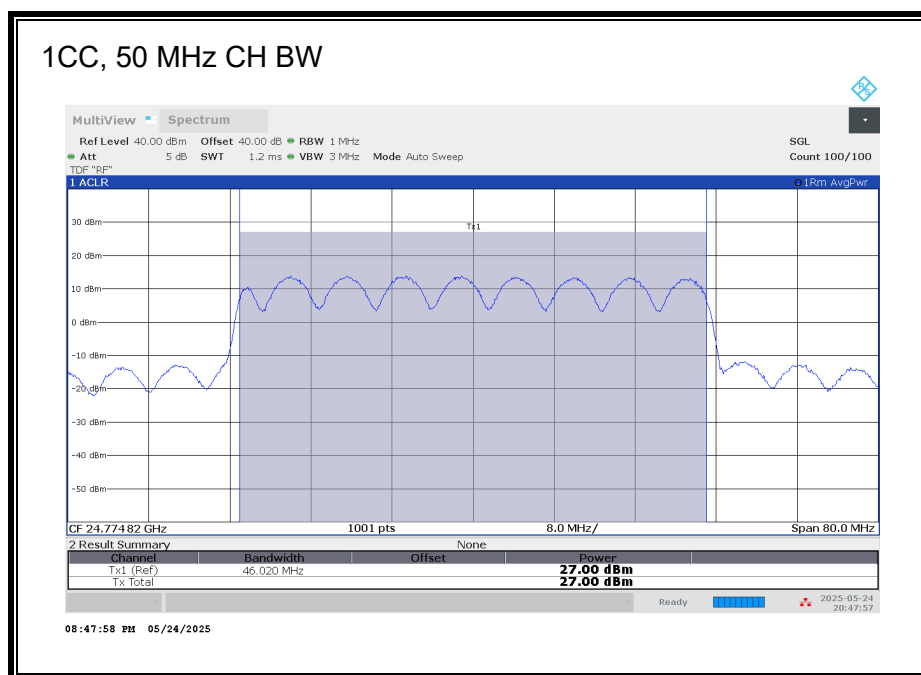


2CC, 50 MHz CH BW

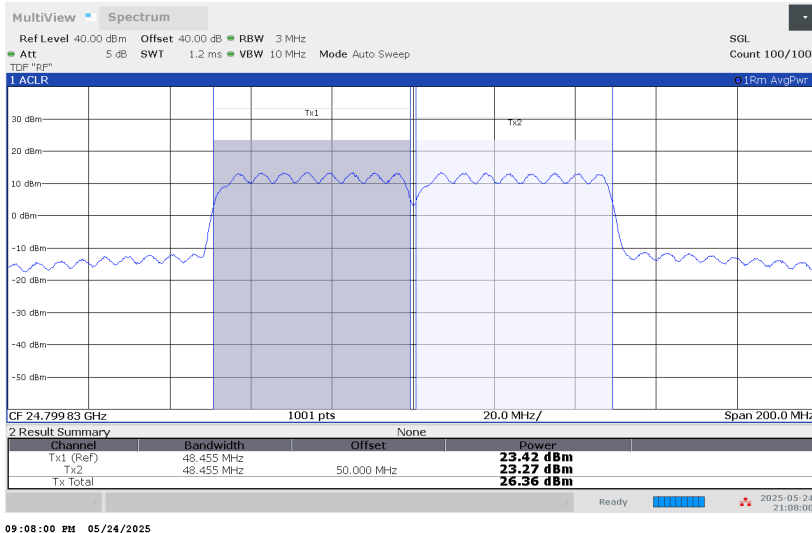


2CC, 100 MHz CH BW




3CC, 50 MHz CH BW

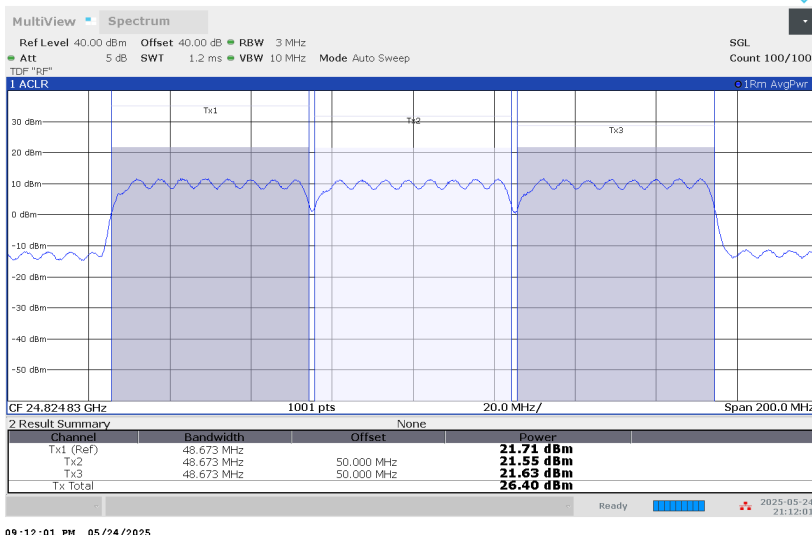


3CC, 100 MHz CH BW

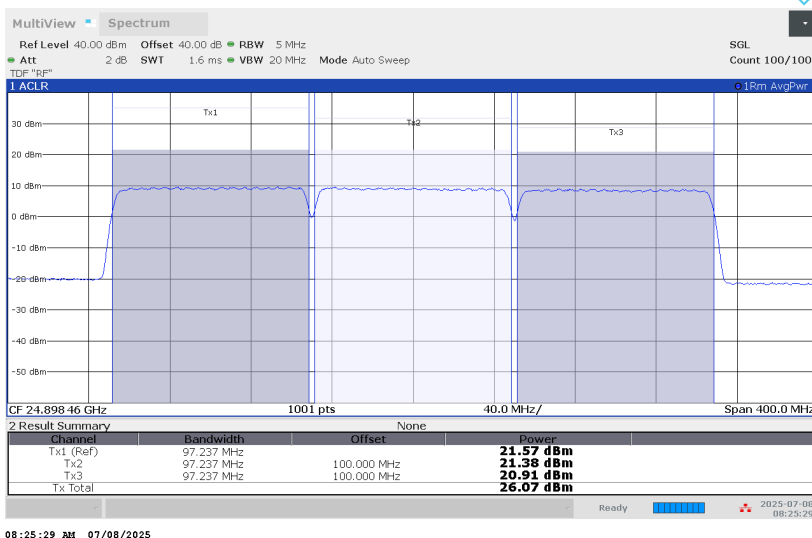

4CC, 50 MHz CH BW

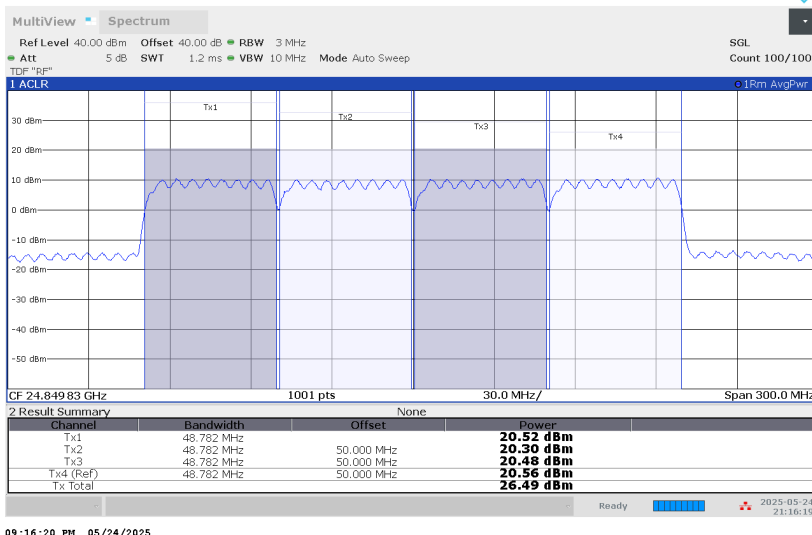

4CC, 100 MHz CH BW

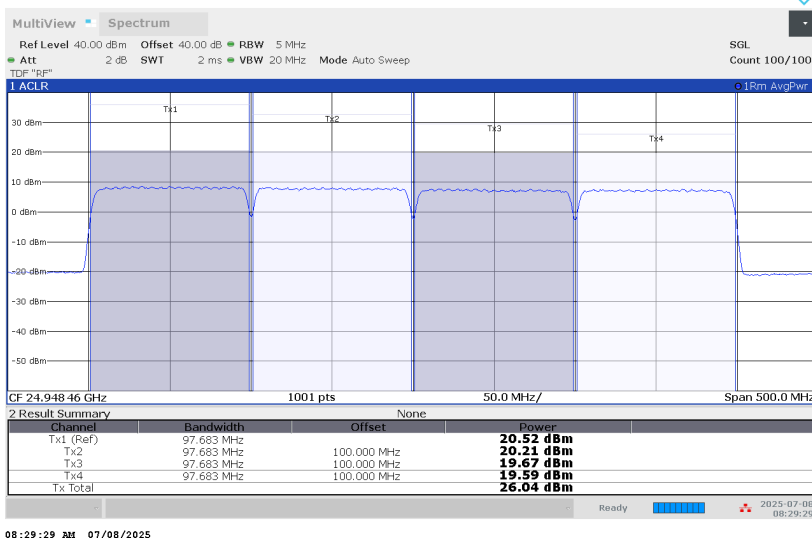

8.2.3. EIRP n261

SISO

CCs Active	CH BW	Modulation	Channel	Frequency	Ant Pol	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)		(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Mid	27.924	H	1/15	30.00	43	-13.00
	100			27.924		1/32	31.08	43	-11.92
2	50			27.899		1/15	23.64	43	-19.36
	100			27.874		1/32	24.13	43	-18.87
3	50			27.874		1/15	23.71	43	-19.29
	100			27.824		1/32	23.83	43	-19.17
4	50			27.849		1/15	23.76	43	-19.24
	100			27.774		1/32	23.51	43	-19.49

SISO-Dual

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin		
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)		
1	50	Pi/2 BPSK	Mid	27.924	1/15	33.02	43	-9.98		
		QPSK	Low	27.503	1/0	29.39	43	-13.61		
				27.524	1/15	33.38	43	-9.62		
				27.525	32/0	28.84	43	-14.16		
				27.924	1/15	33.97	43	-9.03		
			27.925	32/0	30.04	43	-12.96			
			28.324	1/15	34.17	43	-8.83			
			28.347	1/31	31.55	43	-11.45			
			28.325	32/0	29.95	43	-13.05			
		16QAM	Mid	27.924	1/15	32.03	43	-10.97		
	64QAM	Mid	27.924	1/15	29.96	43	-13.04			
	100	Pi/2 BPSK	Mid	27.924	1/32	32.30	43	-10.70		
		QPSK	Low	27.503	1/0	29.81	43	-13.19		
				27.549	1/32	33.34	43	-9.66		
				27.549	64/0	28.57	43	-14.43		
			Mid	27.924	1/32	34.08	43	-8.92		
			High	28.299	1/32	33.14	43	-9.86		
				28.347	1/65	29.15	43	-13.85		
28.301		64/2		29.69	43	-13.31				
16QAM	Mid	27.924	1/32	32.20	43	-10.80				
64QAM	Mid	27.924	1/32	29.75	43	-13.25				
2	50	QPSK	Low	27.503	1/0	26.11	43	-16.89		
				27.525	32/0	28.10	43	-14.90		
			Mid	27.878	1/0	26.80	43	-16.20		
				27.899	1/15	27.55	43	-15.45		
				27.922	1/31	26.40	43	-16.60		
				28.297	1/31	25.79	43	-17.21		
			28.275	32/0	29.48	43	-13.52			
			High	27.875	64/1	28.64	43	-14.36		
				100	QPSK	Low	27.503	1/0	25.65	43
			27.549				64/0	28.09	43	-14.91
	Mid	27.828	1/0			25.86	43	-17.14		
		27.874	1/32			27.03	43	-15.97		
		27.875	1/65			25.88	43	-17.12		
	28.247	1/65	26.38			43	-16.62			
	28.201	64/2	29.00	43	-14.00					
	16QAM	Mid	27.875	64/1	27.16	43	-15.84			
	64QAM	Mid	27.875	64/1	25.18	43	-17.82			



SISO-Dual

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
3	50	QPSK	Low	27.503	1/0	25.90	43	-17.10
				27.525	32/0	27.95	43	-15.05
			Mid	27.853	1/0	26.83	43	-16.17
				27.874	1/15	27.23	43	-15.77
				27.897	1/31	26.38	43	-16.62
				28.247	1/31	25.78	43	-17.22
	High	28.225	32/0	29.38	43	-13.62		
		100	QPSK	Low	27.503	1/0	25.85	43
	27.549				64/0	26.42	43	-16.58
	Mid			27.778	1/0	25.92	43	-17.08
				27.824	1/32	26.99	43	-16.01
				27.872	1/65	26.07	43	-16.93
				28.147	1/65	26.44	43	-16.56
	High	28.101	64/2	27.46	43	-15.54		
4	50	QPSK	Low	27.503	1/0	25.91	43	-17.09
				27.525	32/0	28.09	43	-14.91
			Mid	27.827	1/0	26.51	43	-16.49
				27.849	1/15	27.25	43	-15.75
				27.872	1/31	26.21	43	-16.79
				28.197	1/31	25.67	43	-17.33
	High	28.175	32/0	29.36	43	-13.64		
		100	Pi/2 BPSK	Mid	27.775	64/1	27.11	43
	QPSK		Low	27.503	1/0	25.86	43	-17.14
				27.549	64/0	26.68	43	-16.32
			Mid	27.728	1/0	25.81	43	-17.19
				27.774	1/32	26.97	43	-16.03
				27.822	1/65	25.80	43	-17.20
				High	28.047	1/65	26.16	43
	28.001		64/2		27.29	43	-15.71	
	16QAM		Mid	27.775	64/1	25.09	43	-17.91
	64QAM		Mid	27.775	64/1	23.04	43	-19.96



MIMO

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Low	27.525	32/0	27.09	43	-15.91
			Mid	27.924	1/15	31.21	43	-11.79
				27.925	32/0	27.94	43	-15.06
			High	28.325	32/0	28.10	43	-14.90
	100		Low	27.550	66/0	25.86	43	-17.14
			Mid	27.926	1/33	30.14	43	-12.86
				27.925	66/0	25.63	43	-17.37
			High	28.300	66/0	26.85	43	-16.15
2	50	QPSK	Low	27.525	32/0	26.31	43	-16.69
			Mid	27.899	1/15	27.62	43	-15.38
				27.900	32/0	27.21	43	-15.79
			High	28.275	32/0	27.27	43	-15.73
	100		Low	27.550	66/0	25.13	43	-17.87
			Mid	27.876	1/33	26.31	43	-16.69
				27.875	66/0	24.86	43	-18.14
			High	28.200	66/0	26.02	43	-16.98
3	50	QPSK	Low	27.525	32/0	26.20	43	-16.80
			Mid	27.874	1/15	27.38	43	-15.62
				27.875	32/0	27.00	43	-16.00
			High	28.225	32/0	27.22	43	-15.78
	100		Low	27.550	66/0	23.46	43	-19.54
			Mid	27.826	1/33	24.36	43	-18.64
				27.825	66/0	23.38	43	-19.62
			High	28.100	66/0	24.56	43	-18.44
4	50	QPSK	Low	27.525	32/0	26.25	43	-16.75
			Mid	27.849	1/15	27.32	43	-15.68
				27.850	32/0	26.94	43	-16.06
			High	28.175	32/0	27.20	43	-15.80
	100		Low	27.550	66/0	23.45	43	-19.55
			Mid	27.776	1/33	24.45	43	-18.55
				27.775	66/0	23.20	43	-19.80
			High	28.000	66/0	24.42	43	-18.58



n261, Full-RB, SISO-Dual, QPSK, Low-CH

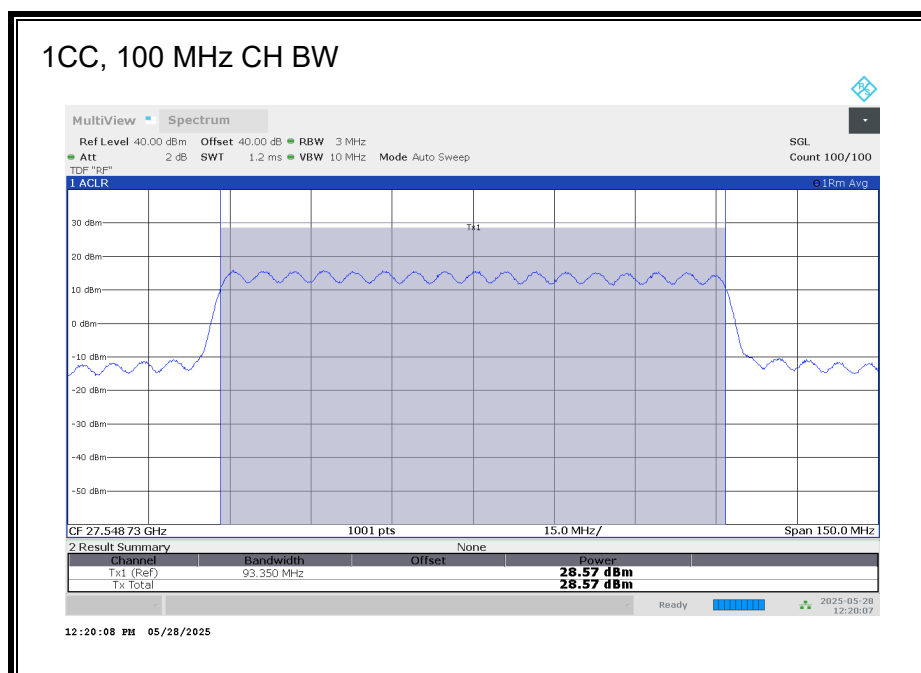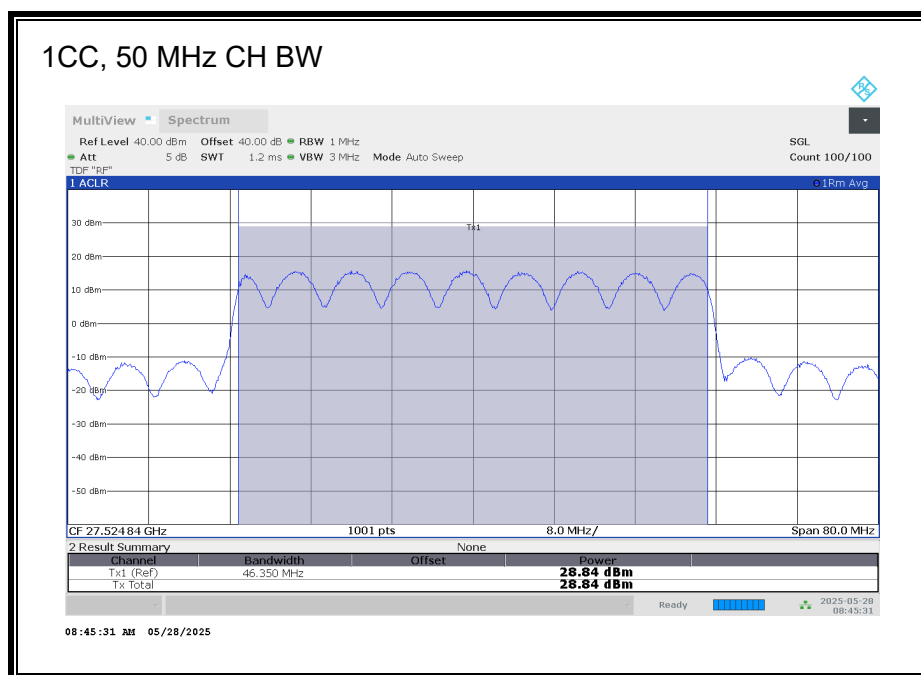



n261, Full-RB, SISO-Dual, QPSK, Low-CH

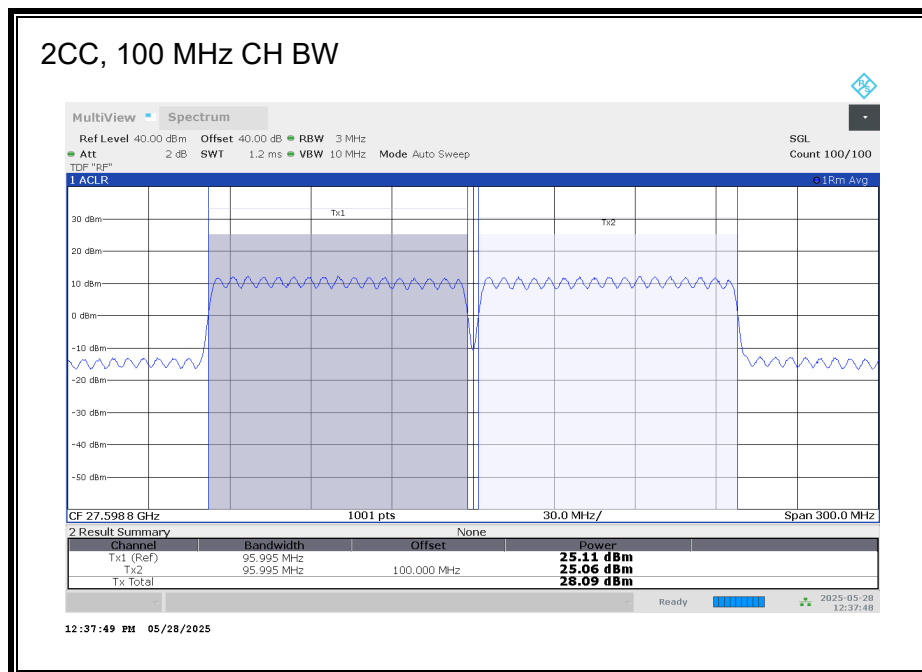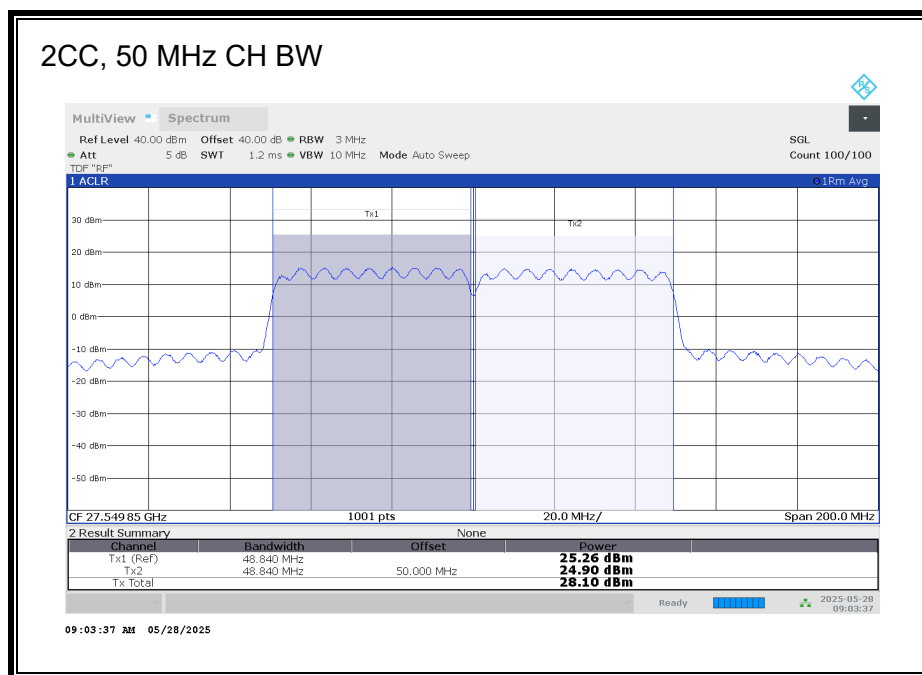

n261, Full-RB, SISO-Dual, QPSK, Low-CH

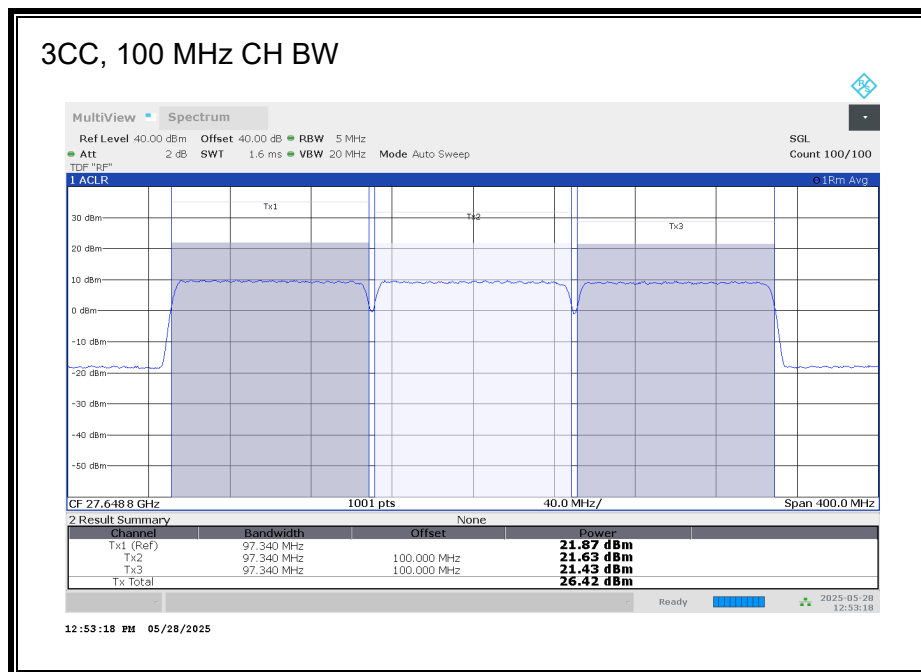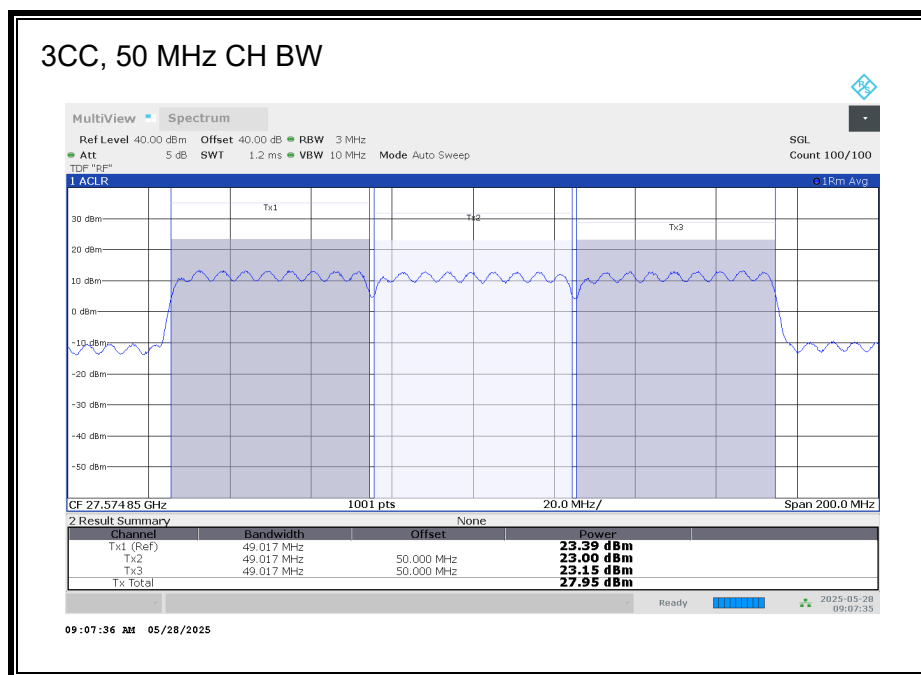

n261, Full-RB, SISO-Dual, QPSK, Low-CH

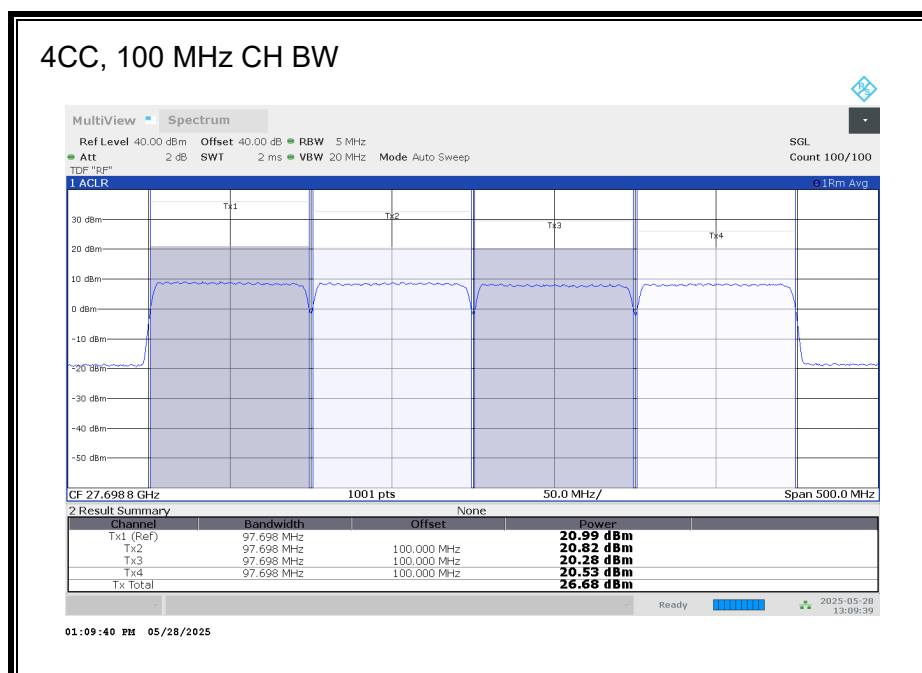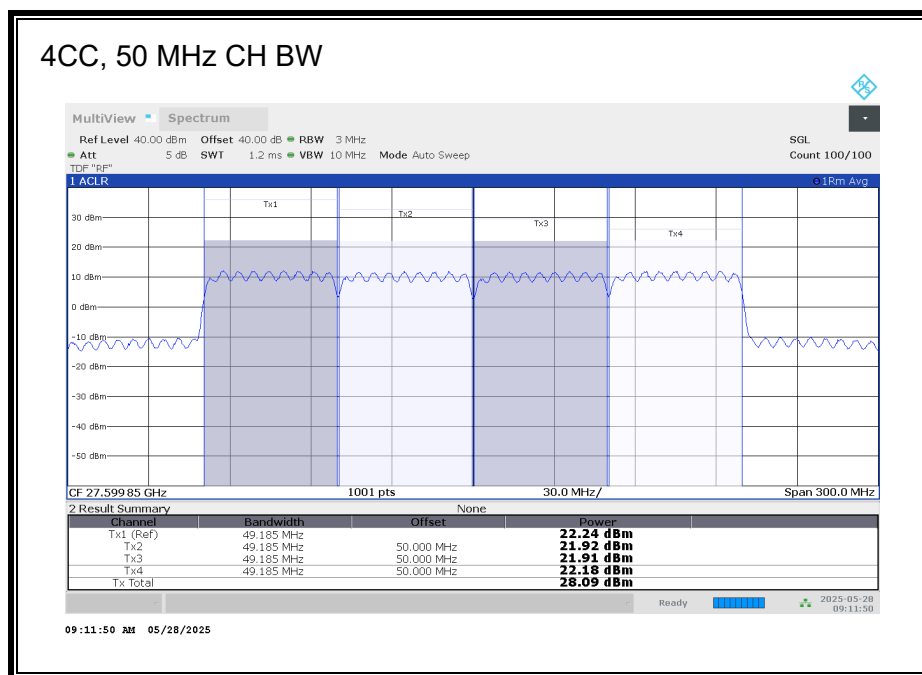

8.2.4. EIRP n260

SISO

CCs Active	CH BW	Modulation	Channel	Frequency	Ant Pol	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)		(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Mid	38.499	H	1/15	30.98	43	-12.02
	100			38.499		1/32	31.23	43	-11.77
2	50			38.474		1/15	24.32	43	-18.68
	100			38.449		1/32	24.35	43	-18.65
3	50			38.449		1/15	24.45	43	-18.55
	100			38.399		1/32	24.52	43	-18.48
4	50			38.424		1/15	24.26	43	-18.74
	100			38.349		1/32	24.45	43	-18.55

SISO-Dual

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	Pi/2 BPSK	Low	37.024	1/15	34.66	43	-8.34
		QPSK	Low	37.003	1/0	32.62	43	-10.38
				37.024	1/15	34.92	43	-8.08
				37.025	32/0	30.57	43	-12.43
				38.499	1/15	33.33	43	-9.67
			38.500	32/0	28.89	43	-14.11	
			39.974	1/15	33.72	43	-9.28	
			39.997	1/31	30.60	43	-12.40	
			39.975	32/0	29.41	43	-13.59	
		16QAM	Low	37.024	1/15	32.55	43	-10.45
		64QAM		37.024	1/15	30.52	43	-12.48
	100	Pi/2 BPSK	Low	37.049	1/32	34.77	43	-8.23
		QPSK	Low	37.003	1/0	32.78	43	-10.22
				37.049	1/32	35.28	43	-7.72
				37.049	64/0	30.31	43	-12.69
			Mid	38.499	1/32	33.62	43	-9.38
			High	39.949	1/32	33.48	43	-9.52
				39.997	1/65	30.92	43	-12.08
				39.951	64/2	28.49	43	-14.51
16QAM		Low	37.049	1/32	32.79	43	-10.21	
64QAM	37.049		1/32	30.79	43	-12.21		
2	50	QPSK	Low	37.003	1/0	28.37	43	-14.63
				37.025	32/0	29.82	43	-13.18
			Mid	38.452	1/0	26.32	43	-16.68
				38.474	1/15	26.95	43	-16.05
				38.497	1/31	27.10	43	-15.90
				39.947	1/31	26.55	43	-16.45
			39.925	32/0	28.98	43	-14.02	
			100	Pi/2 BPSK	Low	37.049	64/0	29.82
	QPSK	Low		37.003	1/0	28.48	43	-14.52
				37.049	64/0	29.77	43	-13.23
				38.403	1/0	26.86	43	-16.14
		Mid		38.449	1/32	26.98	43	-16.02
				38.497	1/65	27.20	43	-15.80
				39.897	1/65	26.55	43	-16.45
				39.851	64/2	27.90	43	-15.10
	16QAM	Low		37.049	64/0	28.38	43	-14.62
	64QAM	Low	37.049	64/0	26.47	43	-16.53	



SISO-Dual

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
3	50	QPSK	Low	37.003	1/0	28.30	43	-14.70
				37.025	32/0	29.83	43	-13.17
			Mid	38.428	1/0	26.36	43	-16.64
				38.449	1/15	27.22	43	-15.78
				38.472	1/31	27.24	43	-15.76
			High	39.897	1/31	26.73	43	-16.27
				39.875	32/0	29.19	43	-13.81
	100	QPSK	Low	37.003	1/0	28.64	43	-14.36
				37.049	64/0	27.86	43	-15.14
			Mid	38.353	1/0	26.90	43	-16.10
				38.399	1/32	27.11	43	-15.89
				38.447	1/65	27.03	43	-15.97
			High	39.797	1/65	26.78	43	-16.22
				39.751	64/2	25.97	43	-17.03
4	50	QPSK	Low	37.003	1/0	28.28	43	-14.72
				37.025	32/0	29.80	43	-13.20
			Mid	38.402	1/0	26.27	43	-16.73
				38.424	1/15	27.15	43	-15.85
				38.447	1/31	27.15	43	-15.85
			High	39.847	1/31	26.63	43	-16.37
				39.825	32/0	29.24	43	-13.76
	100	Pi/2 BPSK	Low	37.049	64/0	27.71	43	-15.29
		QPSK	Low	37.003	1/0	28.62	43	-14.38
				37.049	64/0	27.66	43	-15.34
			Mid	38.303	1/0	26.97	43	-16.03
				38.349	1/32	27.05	43	-15.95
				38.397	1/65	26.98	43	-16.02
			High	39.697	1/65	26.60	43	-16.40
				39.651	64/2	26.09	43	-16.91
		16QAM	Low	37.049	64/0	26.28	43	-16.72
		64QAM	Low	37.049	64/0	24.31	43	-18.69

MIMO


CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)		(dBm)	(dB)
1	50	QPSK	Low	37.025	32/0	28.83	43	-14.17
			Mid	38.499	1/15	30.68	43	-12.32
				38.500	32/0	27.12	43	-15.88
			High	39.974	32/0	27.19	43	-15.81
	100		Low	37.050	66/0	29.23	43	-13.77
			Mid	38.500	1/33	29.91	43	-13.09
				38.500	66/0	27.08	43	-15.92
High	39.949	66/0	25.99	43	-17.01			
2	50	QPSK	Low	37.025	32/0	28.09	43	-14.91
			Mid	38.474	1/15	27.03	43	-15.97
				38.475	32/0	26.57	43	-16.43
			High	39.925	32/0	26.82	43	-16.18
	100		Low	37.050	66/0	28.75	43	-14.25
			Mid	38.451	1/33	26.16	43	-16.84
				38.450	66/0	26.42	43	-16.58
High	39.849	66/0	25.67	43	-17.33			
3	50	QPSK	Low	37.025	32/0	28.11	43	-14.89
			Mid	38.449	1/15	27.19	43	-15.81
				38.450	32/0	26.64	43	-16.36
			High	39.875	32/0	26.82	43	-16.18
	100		Low	37.050	66/0	27.30	43	-15.70
			Mid	38.401	1/33	26.47	43	-16.53
				38.400	66/0	24.93	43	-18.07
High	39.749	66/0	24.07	43	-18.93			
4	50	QPSK	Low	37.025	32/0	28.08	43	-14.92
			Mid	38.424	1/15	27.23	43	-15.77
				38.425	32/0	26.59	43	-16.41
			High	39.825	32/0	26.81	43	-16.19
	100		Low	37.050	66/0	27.25	43	-15.75
			Mid	38.351	1/33	26.37	43	-16.63
				38.350	66/0	25.00	43	-18.00
High	39.649	66/0	24.16	43	-18.84			

n260, Full-RB, SISO-Dual, QPSK, Low-CH

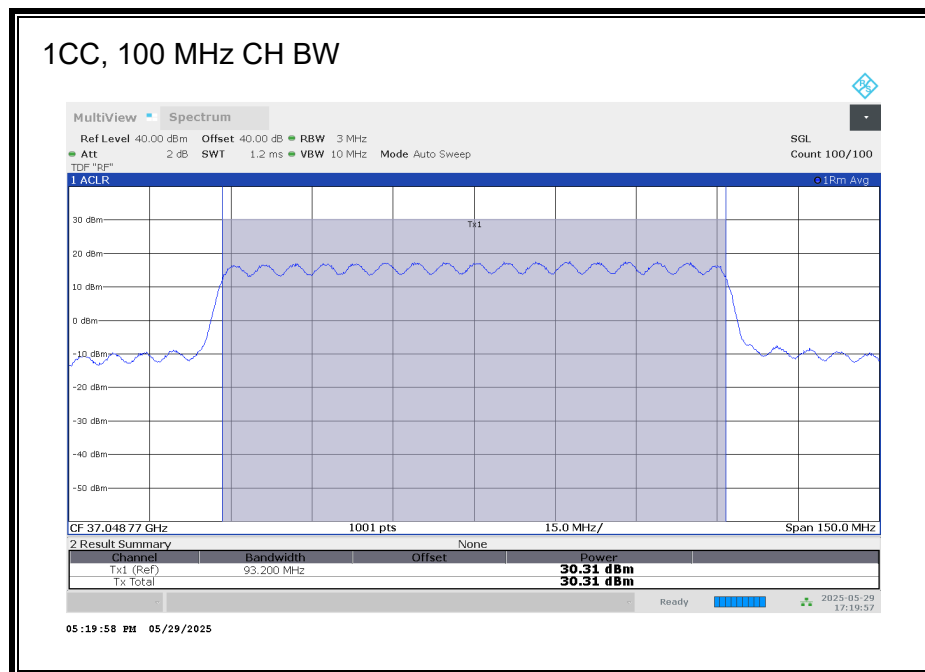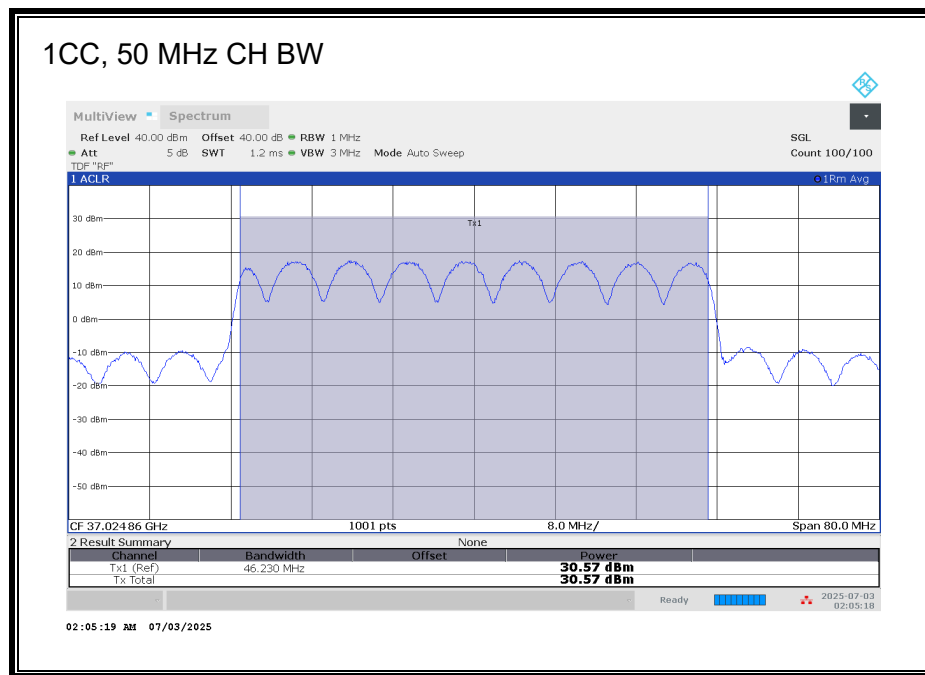


n260, Full-RB, SISO-Dual, QPSK, Low-CH



2CC, 50 MHz CH BW

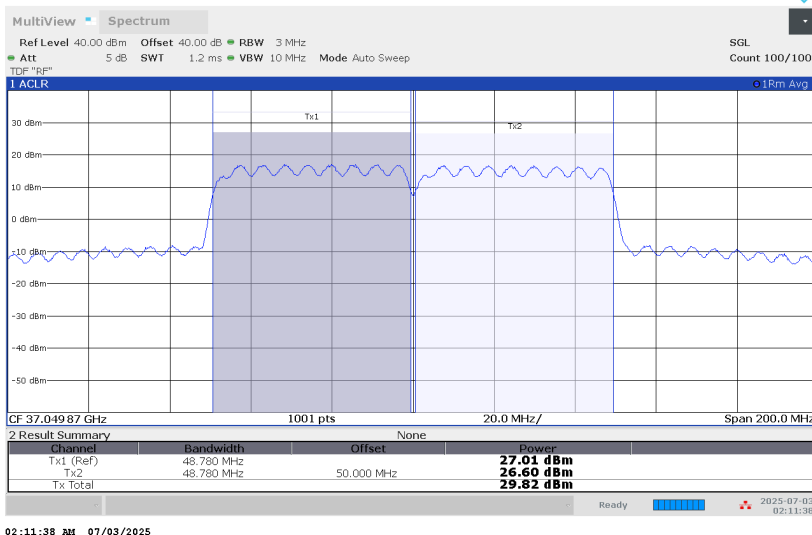



2CC, 100 MHz CH BW

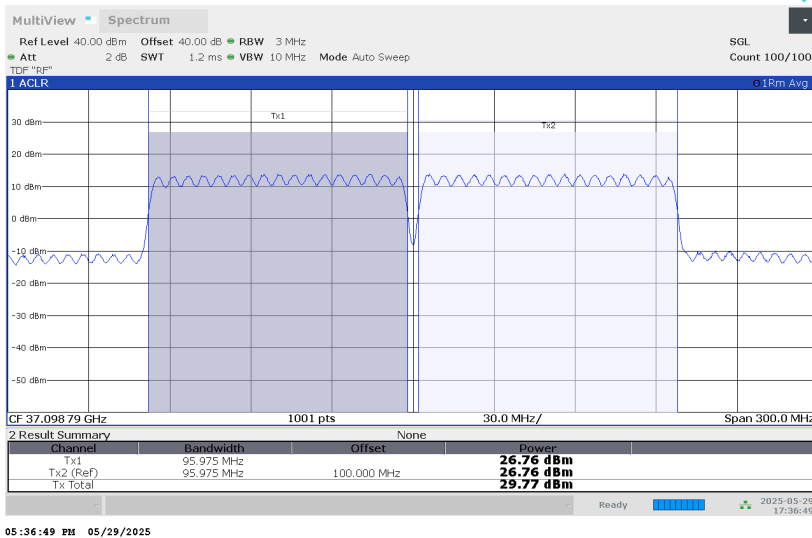

n260, Full-RB, SISO-Dual, QPSK, Low-CH

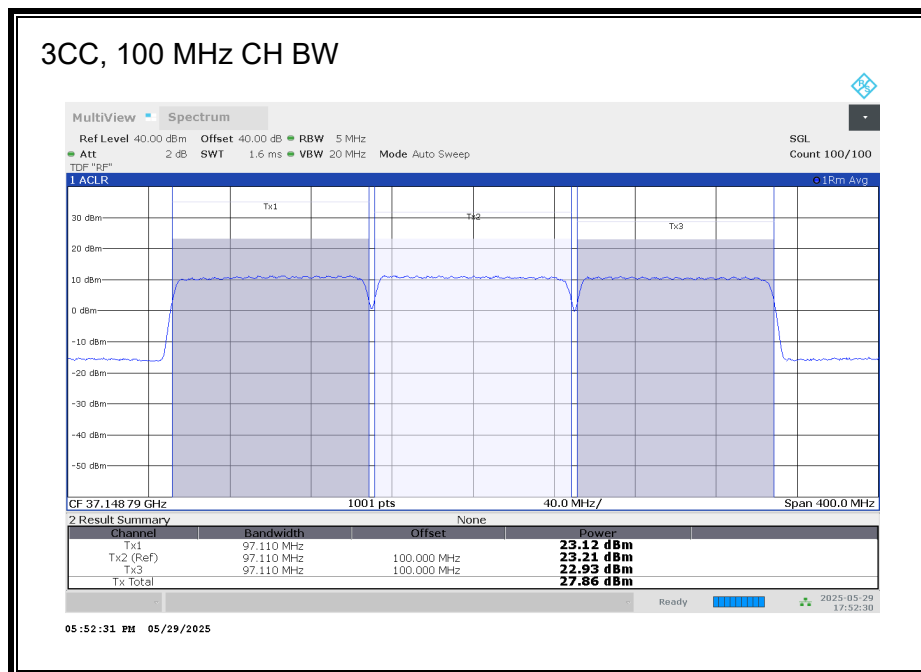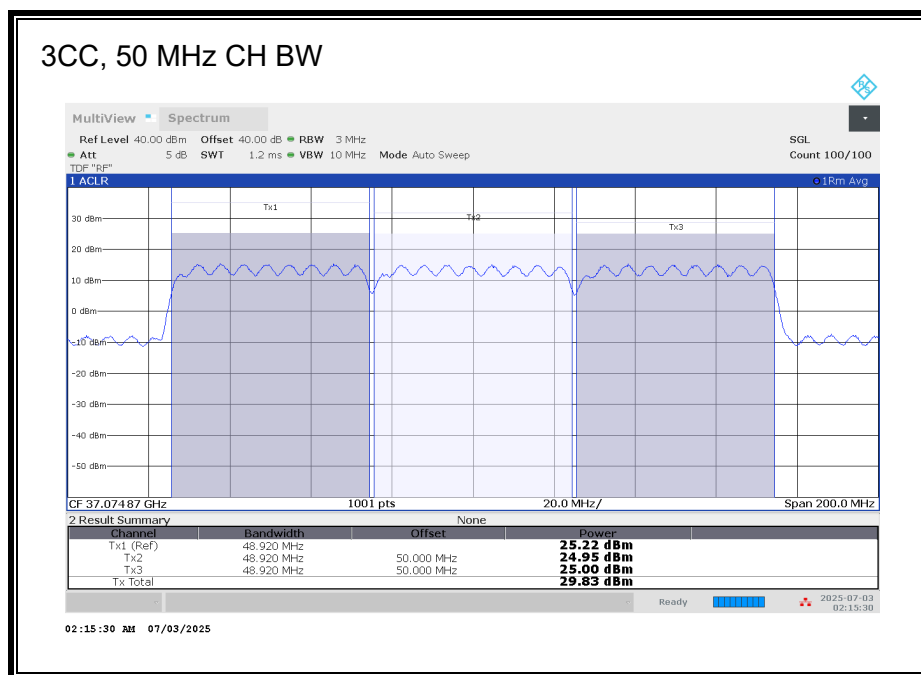

n260, Full-RB, SISO-Dual, QPSK, Low-CH

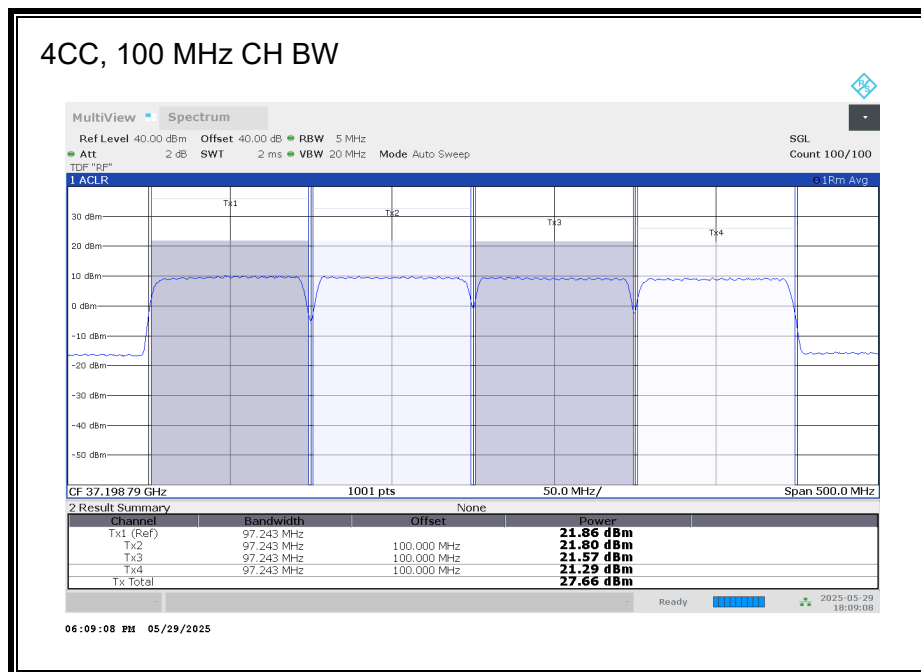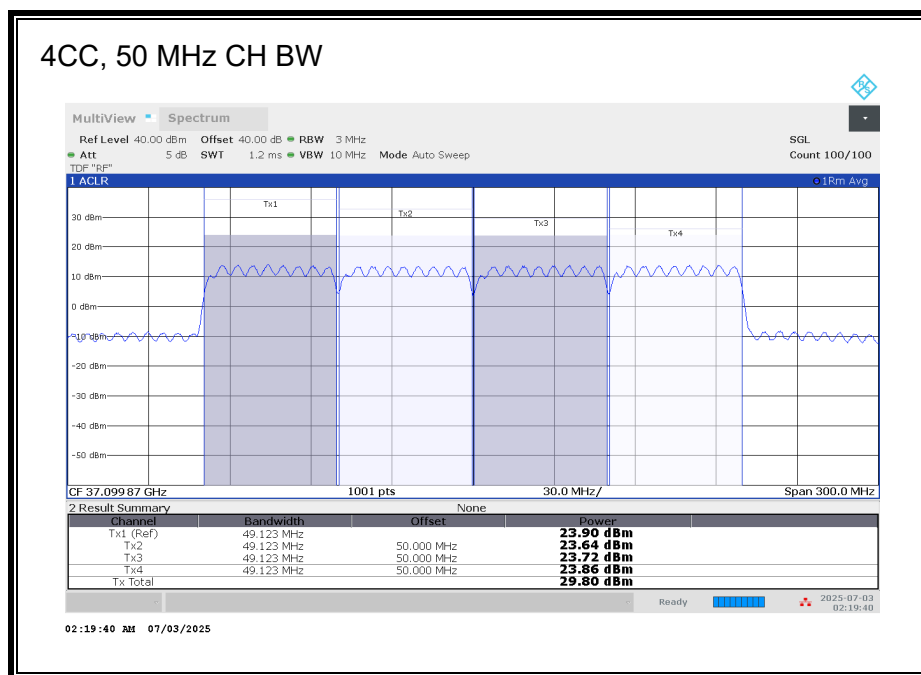

8.3. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §2.1051, §30.203

LIMITS

30.203 (a) - The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

TEST PROCEDURE

- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Number of measurement points in sweep $> 2 \times$ span / RBW
- Sweep Time = Auto Couple
- Detection = Power Averaging (RMS)
- Trace Mode = Average

KDB 842590 D01 Upper Microwave Flexible Use Service v01r03 Section 4.4.2
ANSI C63.26-2015 Clause 5.2, Clause 5.5, Clause 6.4, and Annex C.5.2

All Band Edge emissions were measured as EIRP to compare with the §30.203 TRP limits to demonstrate compliance.

Band Edge measurements of variable frequency bands were performed at the far field test distance listed on Section 5.

EIRP was calculated using the equations on ANSI C63.26-2015 Annex C.5.2. The total correction factors of horn antenna gain, cable loss and far-field path loss were calculated using equations C.8 and C.9, and pre-loaded into spectrum analyzer. The tabulated data factors in the EUT antenna gain to calculate the Final Adjusted EIRP of BE emissions.

Sample calculation of EIRP:

$$\begin{aligned}\text{Total Correction Factor} &= \text{Cable Loss (dB)} - \text{Horn Ant Gain (dBi)} + \text{Path Loss (dB)} \\ &= 4 - 23 + 71 \\ &= 52 \text{ dB}\end{aligned}$$

EIRP on Display Plot = P_{measured} (dBm), where Correction Factor preloaded.

Final Adjusted EIRP = P_{measured} (dBm) – EUT Antenna Gain

In order to properly display the signal level on the plots, the pre-loaded correction factors were intentionally lowered by 40 dB and an offset factor of 40 dB was applied on spectrum analyzer to compensate for the true correction factors across the frequency range of measurement.

Pi/2 BPSK, QPSK, 16QAM and 64QAM modulations were all investigated in SISO-Dual mode, since the highest band edge emissions were for the SISO-Dual antenna configuration, consistent with this configuration also having the highest EIRP. The SISO-Dual mode was, therefore, used for the final band-edge measurements to represent worse case of both SISO-Dual and SISO modes. Additional measurements were made with QPSK modulation on the MIMO mode as it has a wider bandwidth than the SISO-Dual mode. Both Single RB (highest power) and Full RB allocations were measured.

Band edge measurements for multi-carrier (2CC - 4CC) QPSK modulated operations Single RB and Full RB allocations were investigated in each carrier in the (50 MHz + 50 MHz) and (100 MHz + 100 MHz) modes. Note that inter-modulation products which can be seen in the band edge plots are evaluated as part of the radiated spurious emission measurements.

The 1CC to 4CC plots of worst-case SISO-Dual and MIMO, QPSK of both channel bandwidths are provided to demonstrate the test parameter setting on signal analyzer. The tabular data includes the final adjusted EIRP results of the QPSK, Pi/2 BPSK, 16QAM and 64QAM modulations.

RESULTS

See the following pages.

Employee IDs: 19459, 24303, 27294, 27780, 31925, 32226, 103479


Test Date: 05/23/2025 – 07/11/2025

Test Locations: 01-mmW-A, -B, -C & -D


8.3.1. BAND EDGE n258 SB1 SISO-DUAL 1CC

50 MHz, SISO-DUAL, 1CC, QPSK

Low-side, Single RB

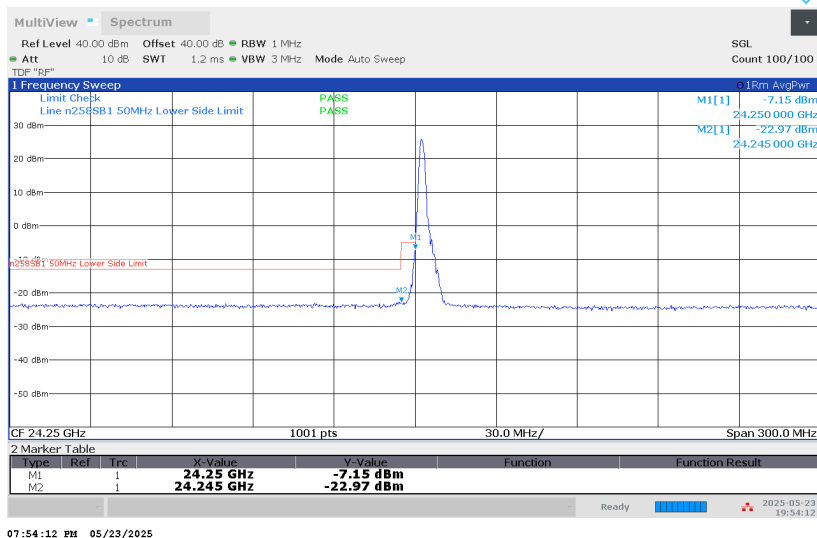


Low-side, Full RB

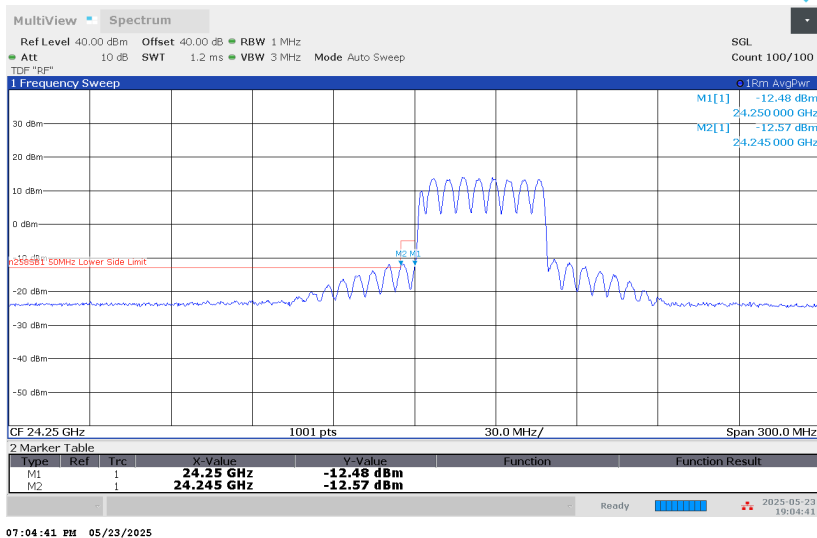


50 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

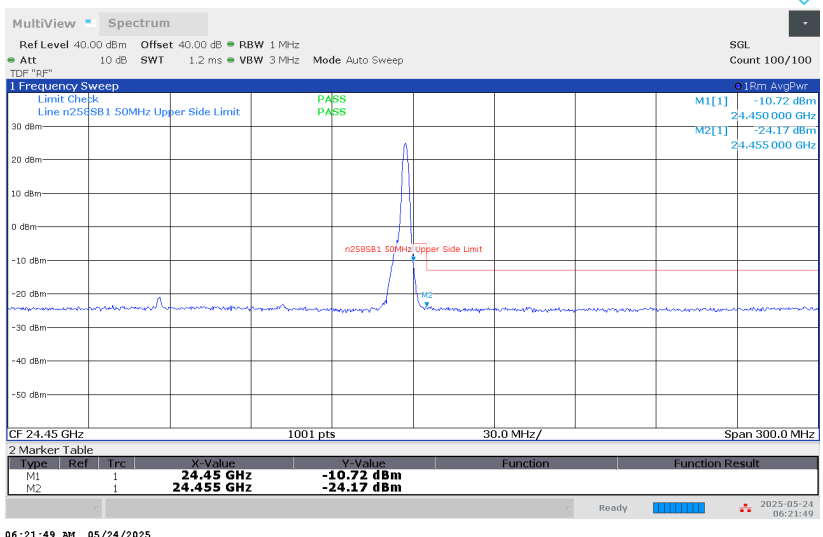

High-side, Full RB

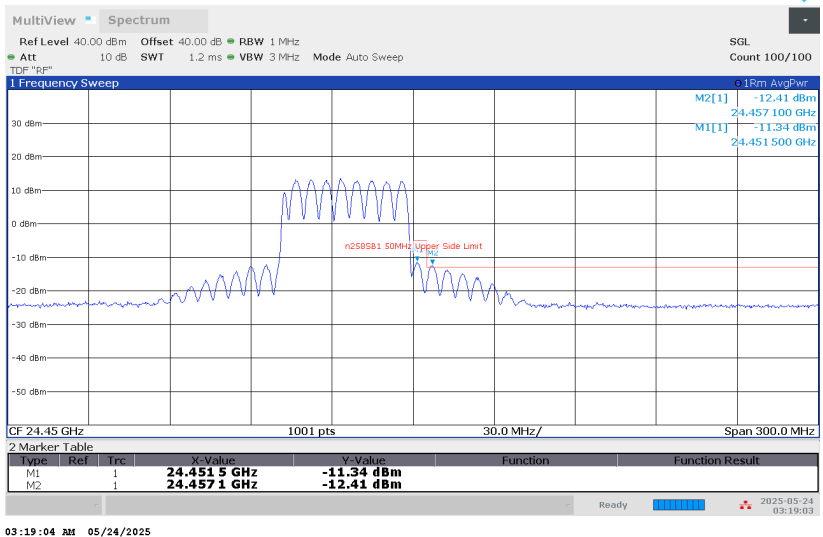

50 MHz, SISO-DUAL, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-7.15	16.80	-23.95	-5.00	-18.95
			24.245	-22.97	16.80	-39.77	-13.00	-26.77
	L	32/0	24.25	-12.48	16.80	-29.28	-5.00	-24.28
			24.245	-12.57	16.80	-29.37	-13.00	-16.37
	H	1/31	24.45	-10.72	16.80	-27.52	-5.00	-22.52
			24.455	-24.17	16.80	-40.97	-13.00	-27.97
	H	32/0	24.452	-11.34	16.80	-28.14	-5.00	-23.14
			24.457	-12.41	16.80	-29.21	-13.00	-16.21

50 MHz, SISO-DUAL, 1CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-8.19	16.80	-24.99	-5.00	-19.99
			24.245	-23.53	16.80	-40.33	-13.00	-27.33
	H	1/31	24.45	-8.61	16.80	-25.41	-5.00	-20.41
			24.455	-23.92	16.80	-40.72	-13.00	-27.72

50 MHz, SISO-DUAL, 1CC, 16QAM


BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-10.33	16.80	-27.13	-5.00	-22.13
			24.245	-23.42	16.80	-40.22	-13.00	-27.22
	H	1/31	24.45	-9.52	16.80	-26.32	-5.00	-21.32
			24.455	-24.71	16.80	-41.51	-13.00	-28.51

50 MHz, SISO-DUAL, 1CC, 64QAM


BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-10.71	16.80	-27.51	-5.00	-22.51
			24.245	-23.96	16.80	-40.76	-13.00	-27.76
	H	1/31	24.45	-12.85	16.80	-29.65	-5.00	-24.65
			24.455	-24.44	16.80	-41.24	-13.00	-28.24

100 MHz, SISO-DUAL, 1CC, QPSK

Low-side, Single RB

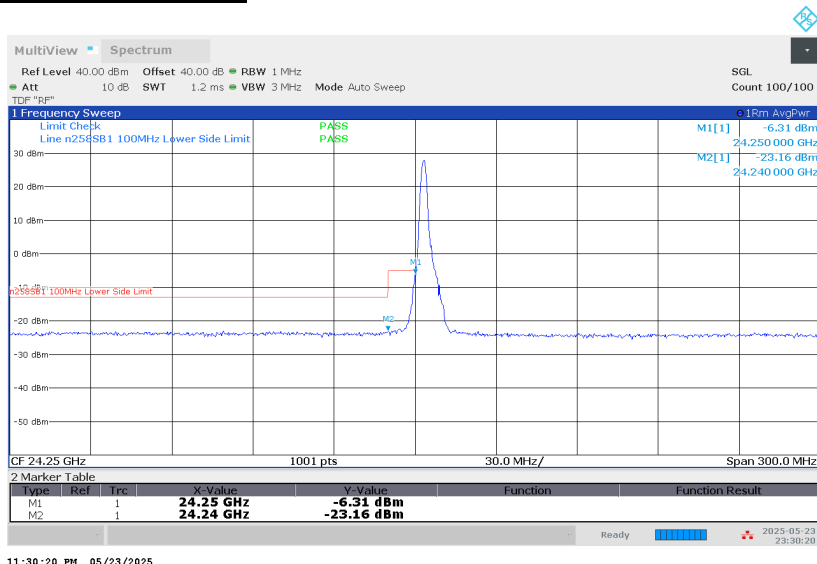


Low-side, Full RB

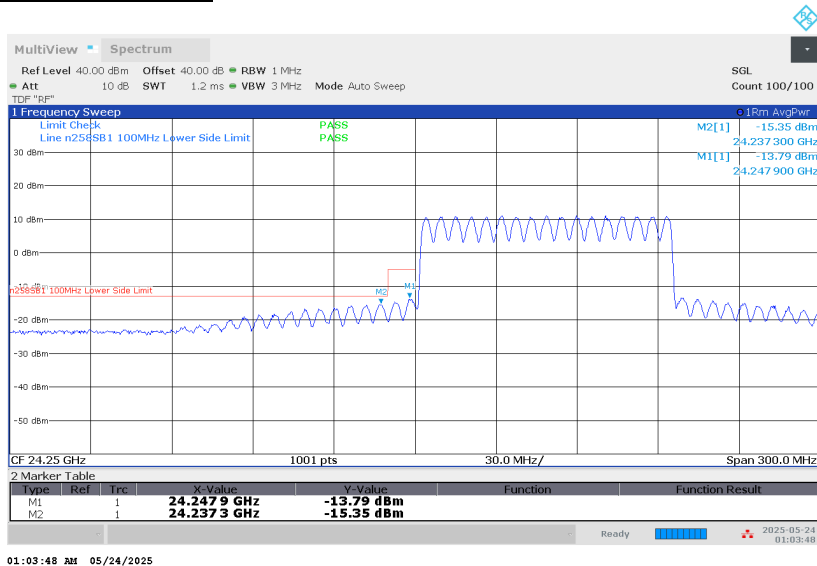


100 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

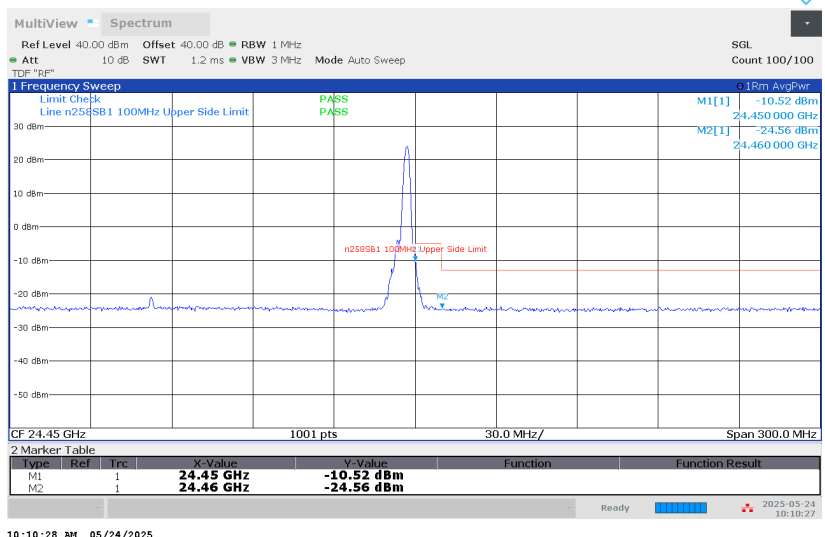

High-side, Full RB

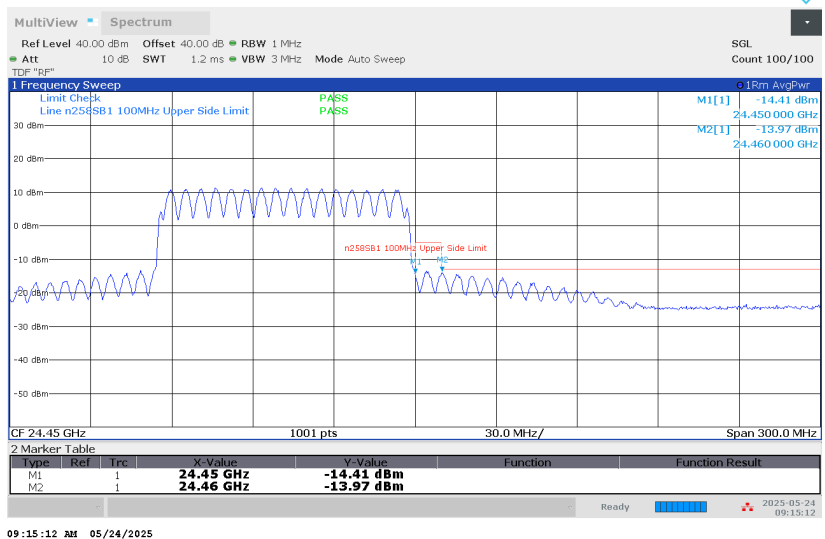

100 MHz, SISO-DUAL, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-6.31	16.80	-23.11	-5.00	-18.11
			24.24	-23.16	16.80	-39.96	-13.00	-26.96
	L	64/0	24.248	-13.79	16.80	-30.59	-5.00	-25.59
			24.237	-15.35	16.80	-32.15	-13.00	-19.15
	H	1/65	24.45	-10.52	16.80	-27.32	-5.00	-22.32
			24.46	-24.56	16.80	-41.36	-13.00	-28.36
	H	64/2	24.45	-14.41	16.80	-31.21	-5.00	-26.21
			24.46	-13.97	16.80	-30.77	-13.00	-17.77

100 MHz, SISO-DUAL, 1CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	64/0	24.25	-17.80	16.80	-34.60	-5.00	-29.60
			24.24	-22.03	16.80	-38.83	-13.00	-25.83
	H	64/2	24.45	-15.50	16.80	-32.30	-5.00	-27.30
			24.46	-18.19	16.80	-34.99	-13.00	-21.99

100 MHz, SISO-DUAL, 1CC, 16QAM



BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	64/0	24.25	-19.47	16.80	-36.27	-5.00	-31.27
			24.24	-22.42	16.80	-39.22	-13.00	-26.22
	H	64/2	24.45	-18.82	16.80	-35.62	-5.00	-30.62
			24.46	-17.63	16.80	-34.43	-13.00	-21.43

100 MHz, SISO-DUAL, 1CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	64/0	24.25	-22.41	16.80	-39.21	-5.00	-34.21
			24.24	-23.28	16.80	-40.08	-13.00	-27.08
	H	64/2	24.45	-22.41	16.80	-39.21	-5.00	-34.21
			24.46	-23.55	16.80	-40.35	-13.00	-27.35


8.3.2. BAND EDGE n258 SB1 SISO-DUAL 2CC

50 MHz, SISO-DUAL, 2CC, QPSK

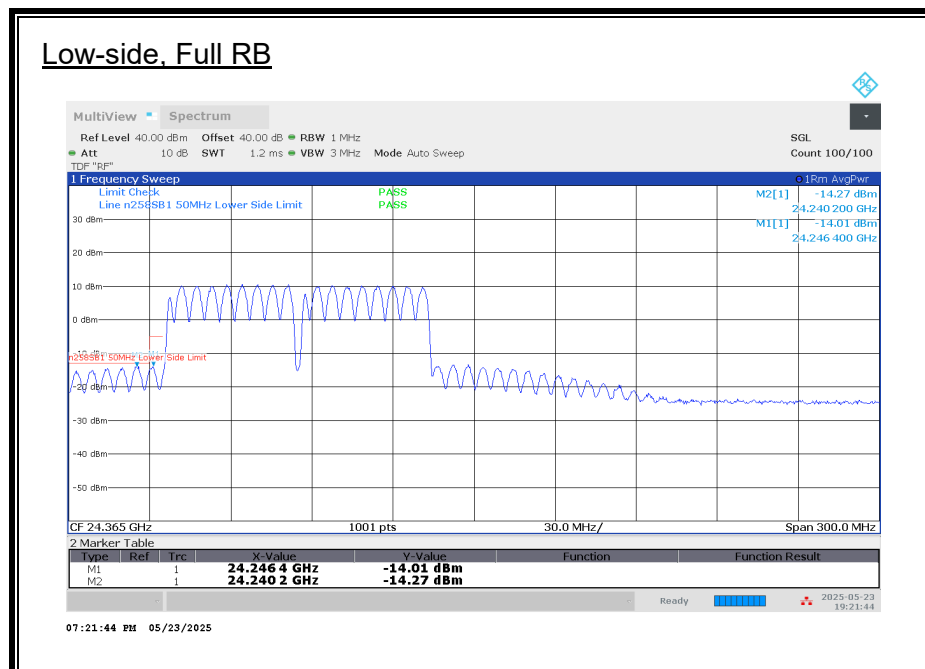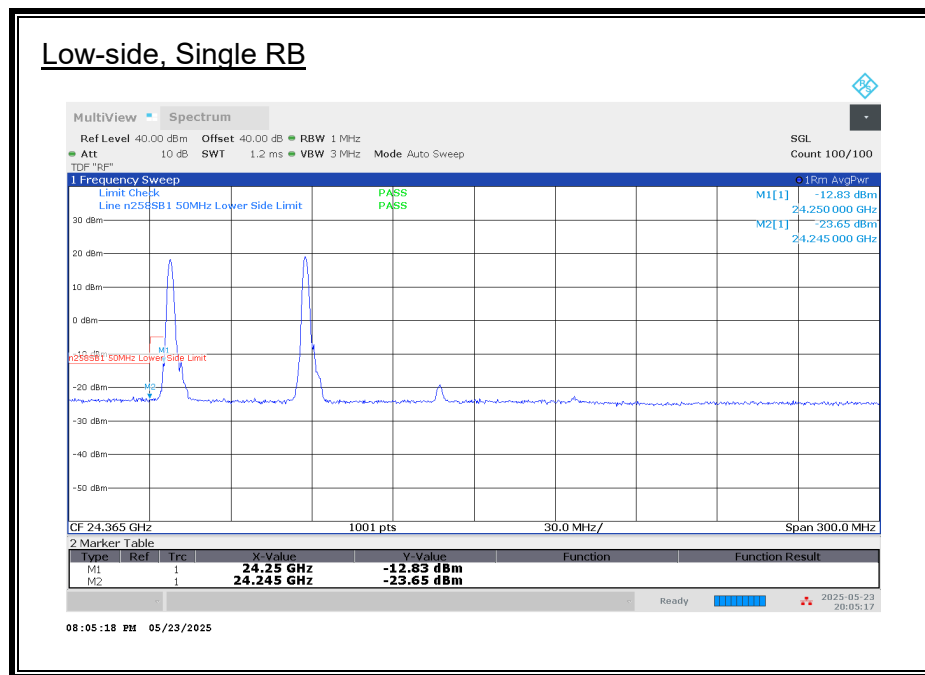


50 MHz, SISO-DUAL, 2CC, QPSK

High-side, Single RB

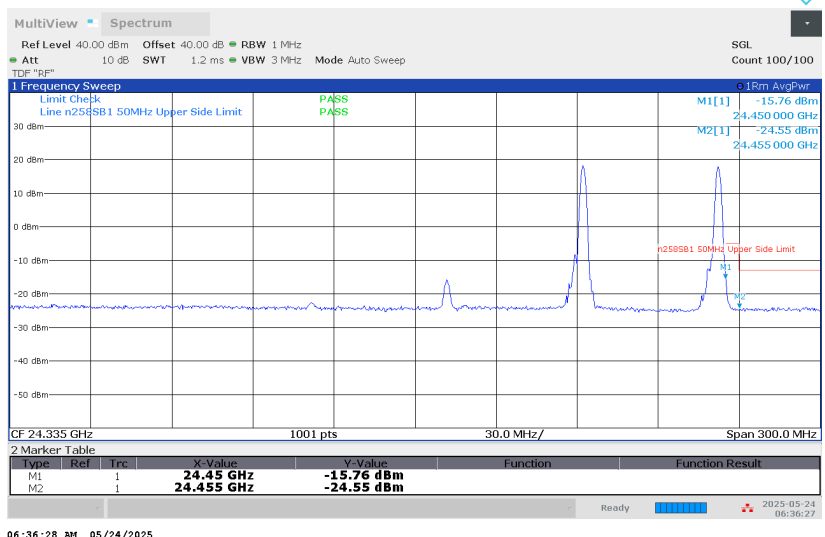

High-side, Full RB

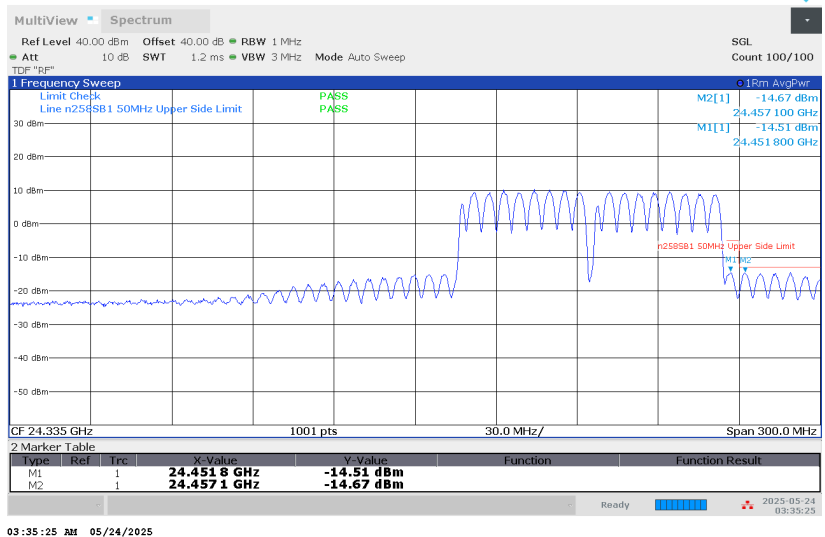

50 MHz, SISO-DUAL, 2CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-12.83	16.80	-29.63	-5.00	-24.63
			24.245	-23.65	16.80	-40.45	-13.00	-27.45
	L	32/0	24.246	-14.01	16.80	-30.81	-5.00	-25.81
			24.240	-14.27	16.80	-31.07	-13.00	-18.07
	H	1/31	24.45	-15.76	16.80	-32.56	-5.00	-27.56
			24.455	-24.55	16.80	-41.35	-13.00	-28.35
	H	32/0	24.452	-14.51	16.80	-31.31	-5.00	-26.31
			24.457	-14.67	16.80	-31.47	-13.00	-18.47

50 MHz, SISO-DUAL, 2CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-17.08	16.80	-33.88	-5.00	-28.88
			24.245	-23.08	16.80	-39.88	-13.00	-26.88
	H	1/31	24.45	-18.80	16.80	-35.60	-5.00	-30.60
			24.455	-25.16	16.80	-41.96	-13.00	-28.96

50 MHz, SISO-DUAL, 2CC, 16QAM

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-16.95	16.80	-33.75	-5.00	-28.75
			24.245	-24.03	16.80	-40.83	-13.00	-27.83
	H	1/31	24.45	-18.41	16.80	-35.21	-5.00	-30.21
			24.455	-24.40	16.80	-41.20	-13.00	-28.20

50 MHz, SISO-DUAL, 2CC, 64QAM


BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-17.24	16.80	-34.04	-5.00	-29.04
			24.245	-23.79	16.80	-40.59	-13.00	-27.59
	H	1/31	24.45	-18.27	16.80	-35.07	-5.00	-30.07
			24.455	-25.15	16.80	-41.95	-13.00	-28.95

100 MHz, SISO-DUAL, 2CC, QPSK




100 MHz, SISO-DUAL, 2CC, QPSK

High-side, Single RB

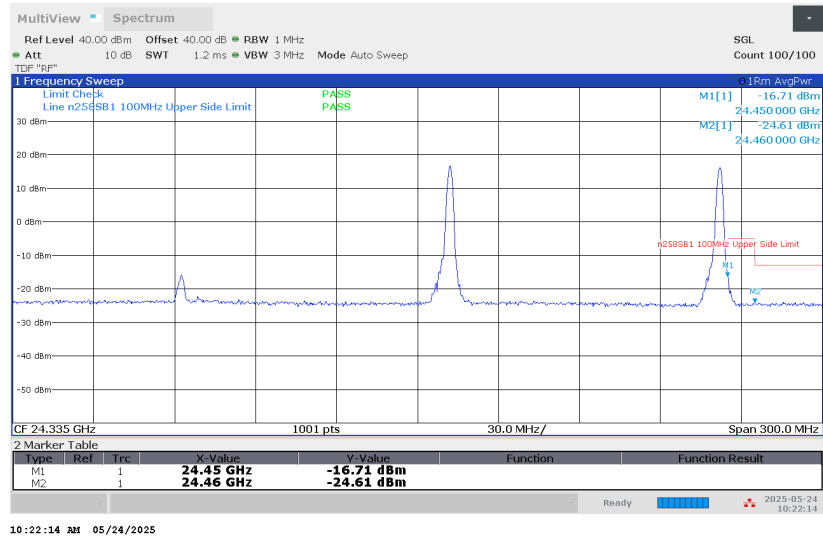

High-side, Full RB


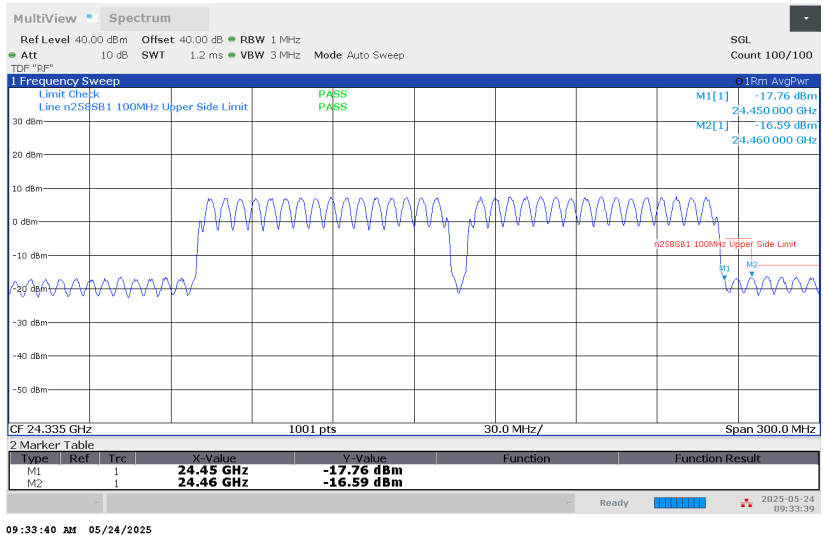


100 MHz, SISO-DUAL, 2CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-13.61	16.80	-30.41	-5.00	-25.41
			24.24	-24.13	16.80	-40.93	-13.00	-27.93
	L	64/0	24.248	-16.95	16.80	-33.75	-5.00	-28.75
			24.237	-16.83	16.80	-33.63	-13.00	-20.63
	H	1/65	24.45	-16.71	16.80	-33.51	-5.00	-28.51
			24.46	-24.61	16.80	-41.41	-13.00	-28.41
	H	64/2	24.45	-17.76	16.80	-34.56	-5.00	-29.56
			24.46	-16.59	16.80	-33.39	-13.00	-20.39


8.3.3. BAND EDGE n258 SB1 SISO-DUAL 3CC

50 MHz, SISO-DUAL, 3CC, QPSK

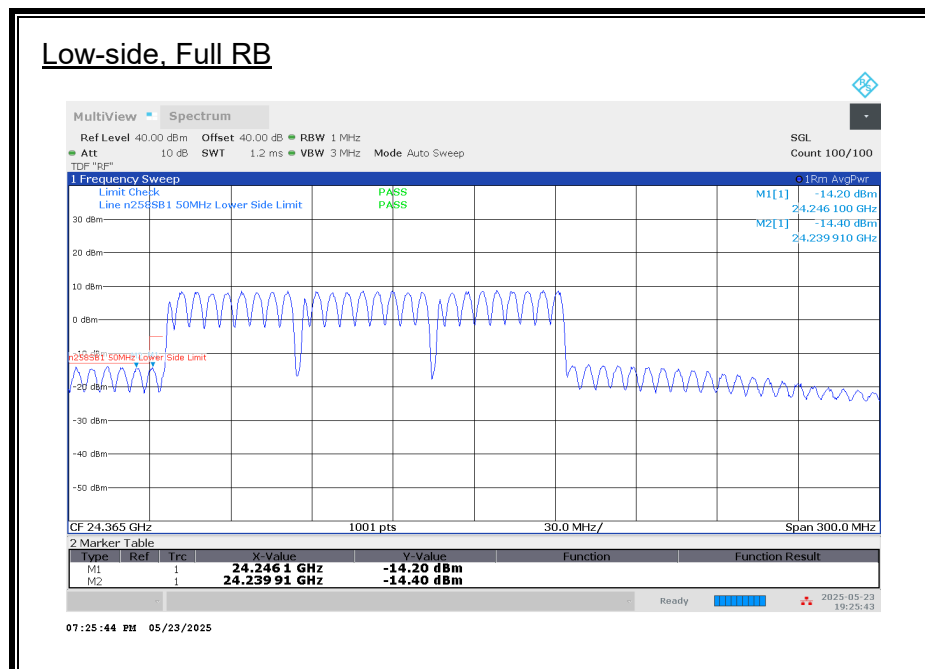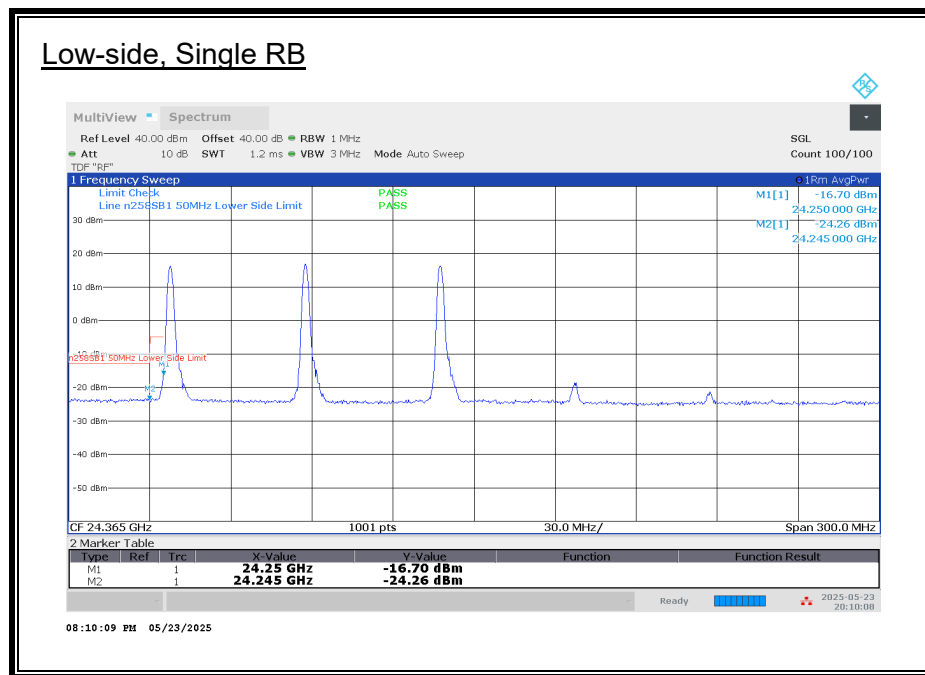


50 MHz, SISO-DUAL, 3CC, QPSK

High-side, Single RB

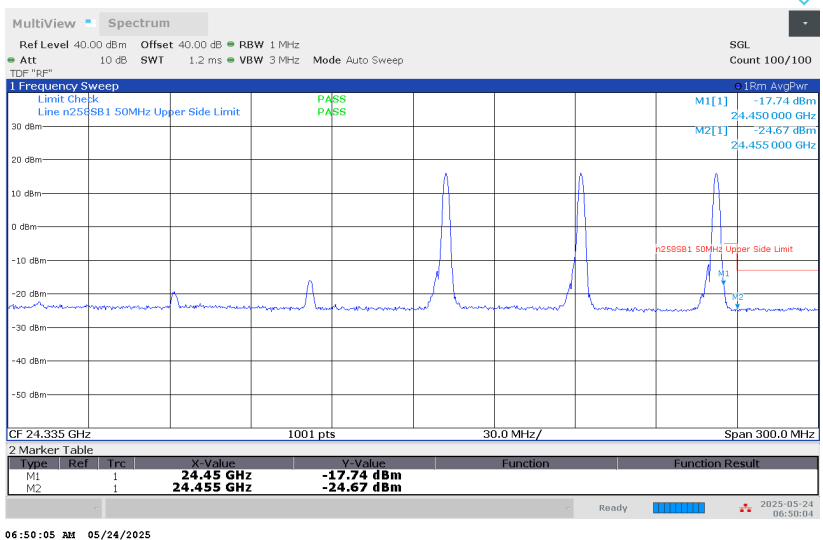

High-side, Full RB

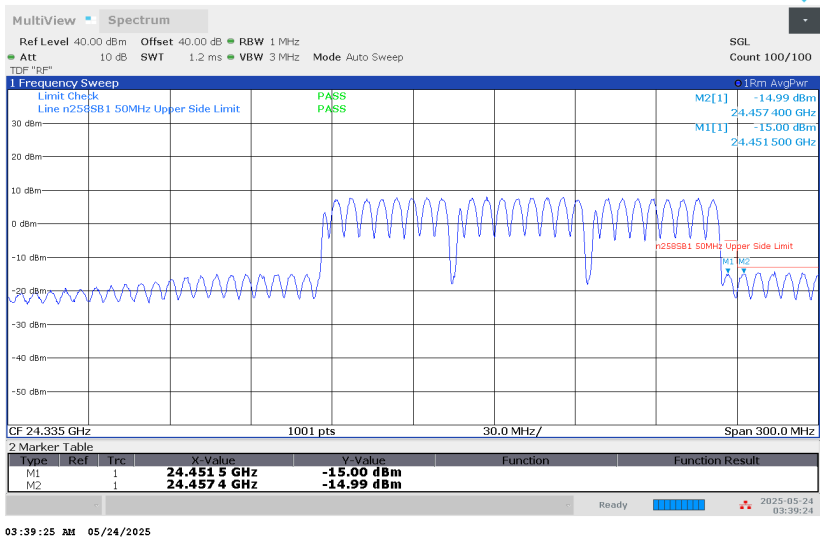

50 MHz, SISO-DUAL, 3CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-16.70	16.80	-33.50	-5.00	-28.50
			24.245	-24.26	16.80	-41.06	-13.00	-28.06
	L	32/0	24.246	-14.20	16.80	-31.00	-5.00	-26.00
			24.240	-14.40	16.80	-31.20	-13.00	-18.20
	H	1/31	24.45	-17.74	16.80	-34.54	-5.00	-29.54
			24.455	-24.67	16.80	-41.47	-13.00	-28.47
	H	32/0	24.452	-15.00	16.80	-31.80	-5.00	-26.80
			24.457	-14.99	16.80	-31.79	-13.00	-18.79

50 MHz, SISO-DUAL, 3CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-15.51	16.80	-32.31	-5.00	-27.31
			24.245	-23.72	16.80	-40.52	-13.00	-27.52
	H	1/31	24.45	-19.22	16.80	-36.02	-5.00	-31.02
			24.455	-24.42	16.80	-41.22	-13.00	-28.22

50 MHz, SISO-DUAL, 3CC, 16QAM



BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-17.64	16.80	-34.44	-5.00	-29.44
			24.245	-24.34	16.80	-41.14	-13.00	-28.14
	H	1/31	24.45	-18.60	16.80	-35.40	-5.00	-30.40
			24.455	-25.08	16.80	-41.88	-13.00	-28.88

50 MHz, SISO-DUAL, 3CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-18.03	16.80	-34.83	-5.00	-29.83
			24.245	-24.03	16.80	-40.83	-13.00	-27.83
	H	1/31	24.45	-19.61	16.80	-36.41	-5.00	-31.41
			24.455	-24.13	16.80	-40.93	-13.00	-27.93


8.3.4. BAND EDGE n258 SB1 SISO-DUAL 4CC

50 MHz, SISO-DUAL, 4CC, QPSK

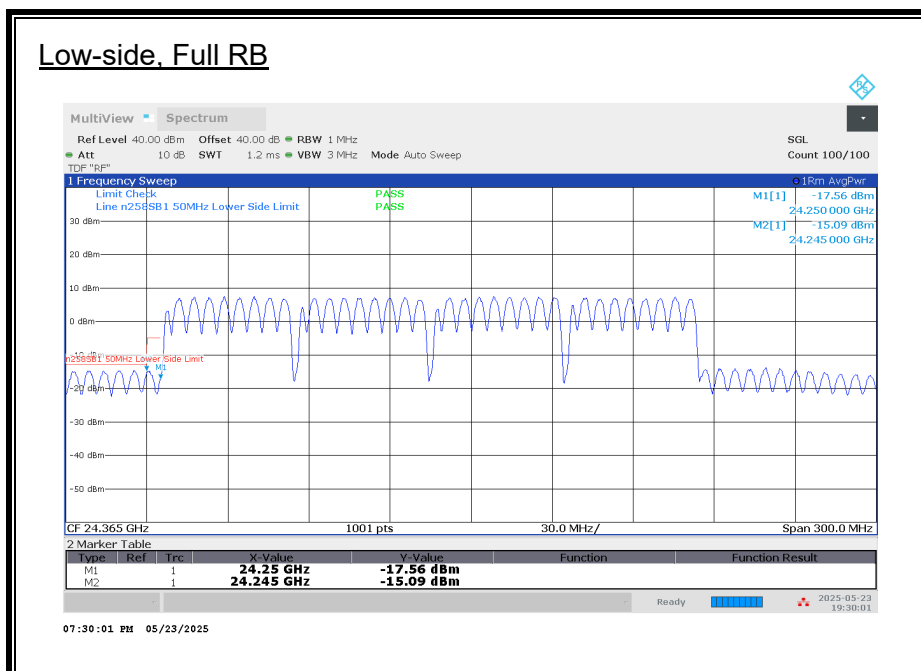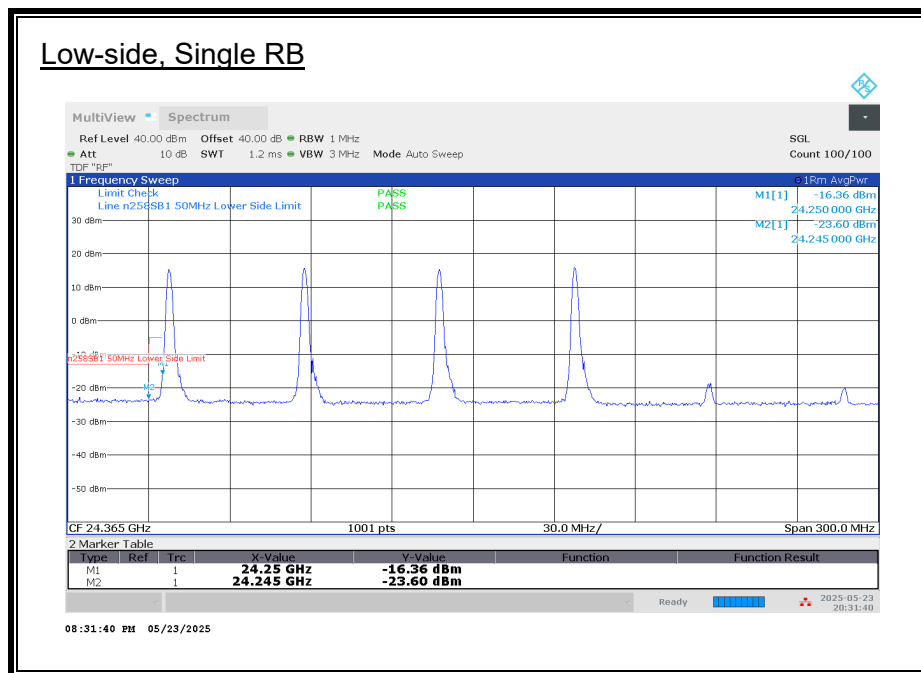


50 MHz, SISO-DUAL, 4CC, QPSK

High-side, Single RB

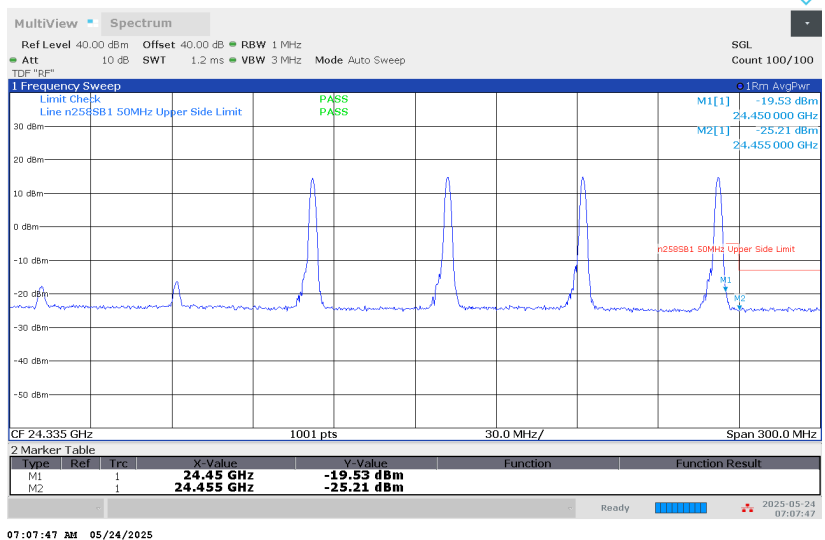

High-side, Full RB

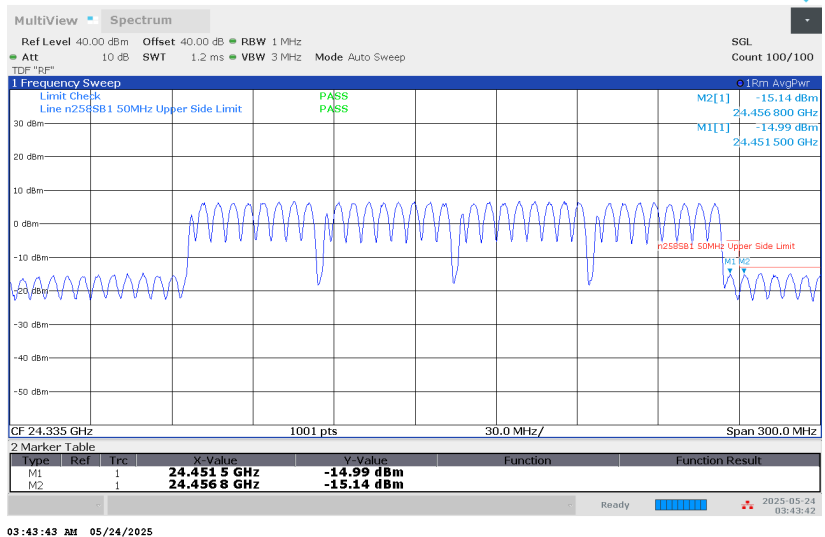

50 MHz, SISO-DUAL, 4CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-16.36	16.80	-33.16	-5.00	-28.16
			24.245	-23.60	16.80	-40.40	-13.00	-27.40
	L	32/0	24.25	-17.56	16.80	-34.36	-5.00	-29.36
			24.245	-15.09	16.80	-31.89	-13.00	-18.89
	H	1/31	24.45	-19.53	16.80	-36.33	-5.00	-31.33
			24.455	-25.21	16.80	-42.01	-13.00	-29.01
	H	32/0	24.452	-14.99	16.80	-31.79	-5.00	-26.79
			24.457	-15.14	16.80	-31.94	-13.00	-18.94

50 MHz, SISO-DUAL, 4CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-17.85	16.80	-34.65	-5.00	-29.65
			24.245	-24.39	16.80	-41.19	-13.00	-28.19
	H	1/31	24.45	-19.91	16.80	-36.71	-5.00	-31.71
			24.455	-24.75	16.80	-41.55	-13.00	-28.55

50 MHz, SISO-DUAL, 4CC, 16QAM


BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-16.53	16.80	-33.33	-5.00	-28.33
			24.245	-23.68	16.80	-40.48	-13.00	-27.48
	H	1/31	24.45	-20.60	16.80	-37.40	-5.00	-32.40
			24.455	-24.26	16.80	-41.06	-13.00	-28.06

50 MHz, SISO-DUAL, 4CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-19.53	16.80	-36.33	-5.00	-31.33
			24.245	-23.57	16.80	-40.37	-13.00	-27.37
	H	1/31	24.45	-18.41	16.80	-35.21	-5.00	-30.21
			24.455	-24.59	16.80	-41.39	-13.00	-28.39


8.3.5. BAND EDGE n258 SB1 MIMO 1CC

50 MHz, MIMO, 1CC, QPSK

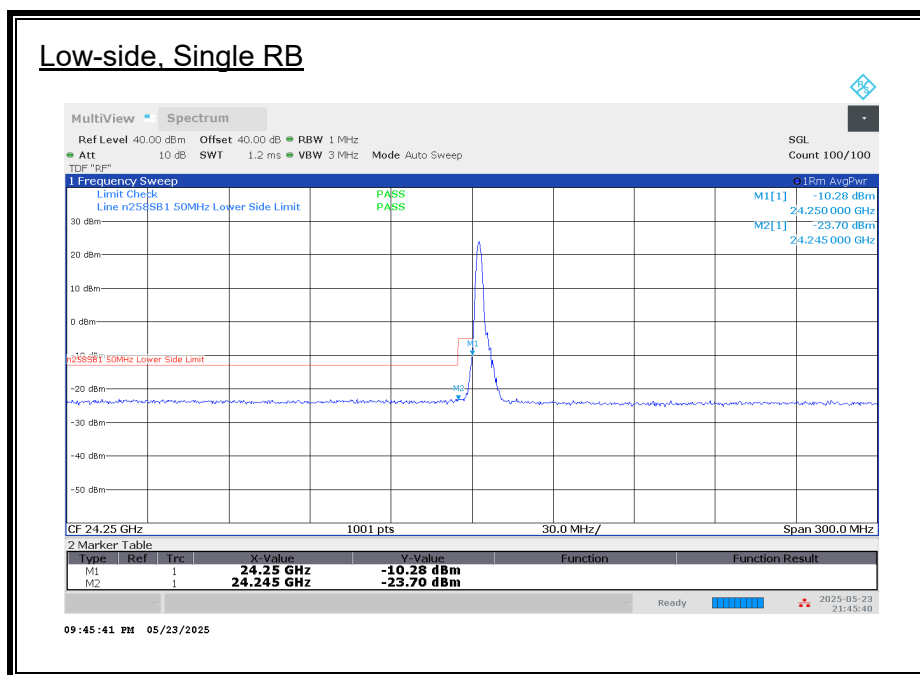


50 MHz, MIMO, 1CC, QPSK

High-side, Single RB

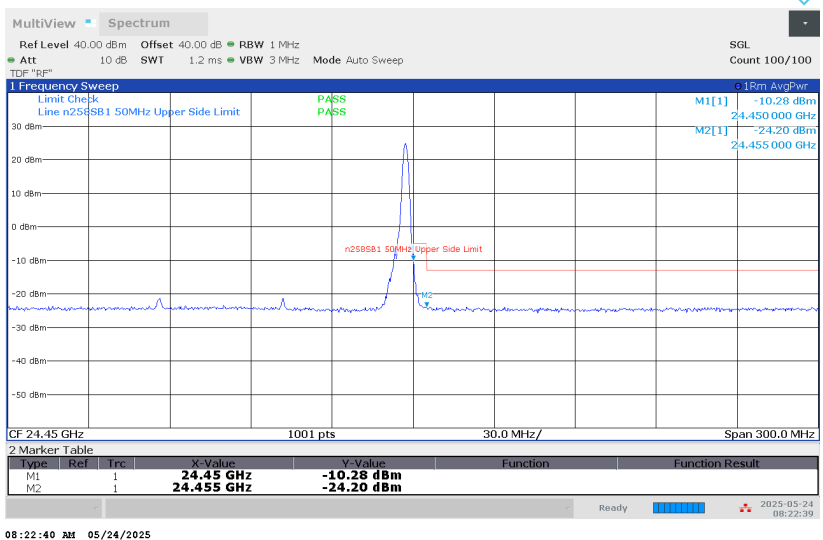

High-side, Full RB

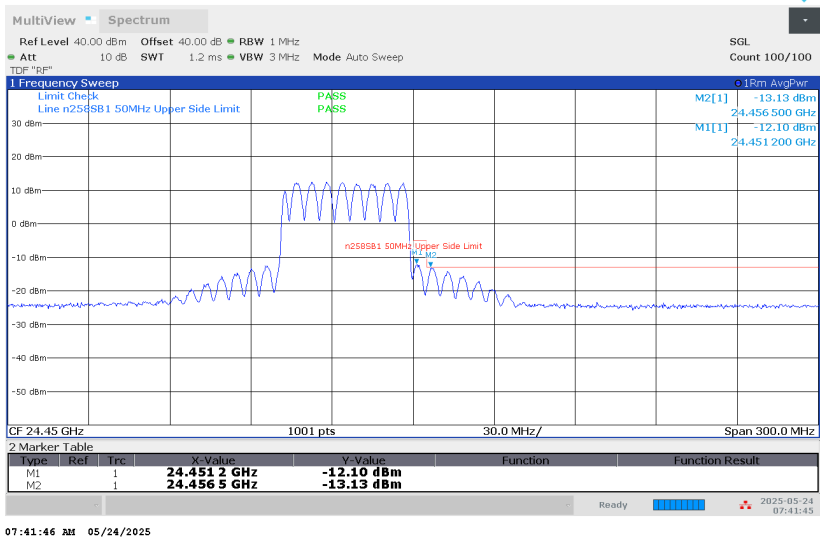


50 MHz, MIMO, 1CC, QPSK


BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-10.28	16.80	-27.08	-5.00	-22.08
			24.245	-23.70	16.80	-40.50	-13.00	-27.50
	L	32/0	24.25	-15.07	16.80	-31.87	-5.00	-26.87
			24.245	-14.39	16.80	-31.19	-13.00	-18.19
	H	1/31	24.45	-10.28	16.80	-27.08	-5.00	-22.08
			24.455	-24.20	16.80	-41.00	-13.00	-28.00
	H	32/0	24.451	-12.10	16.80	-28.90	-5.00	-23.90
			24.457	-13.13	16.80	-29.93	-13.00	-16.93

100 MHz, MIMO, 1CC, QPSK

Low-side, Single RB

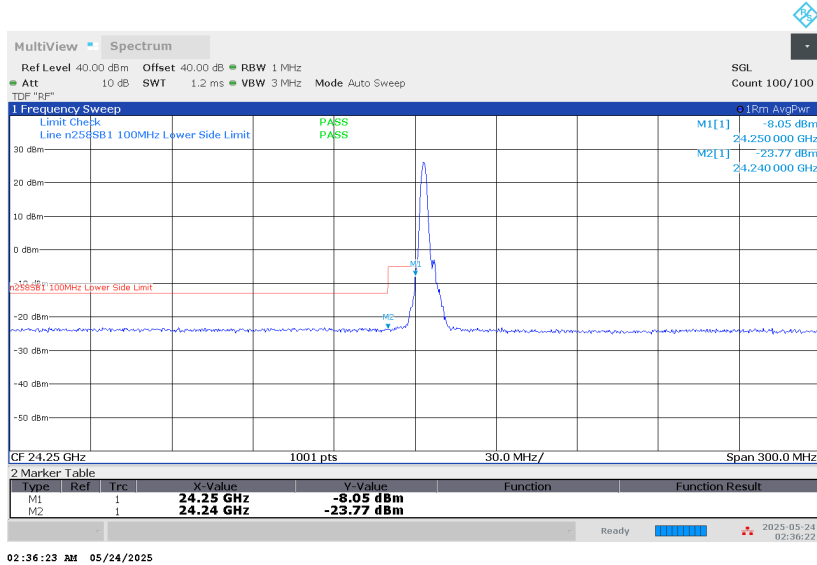


Low-side, Full RB

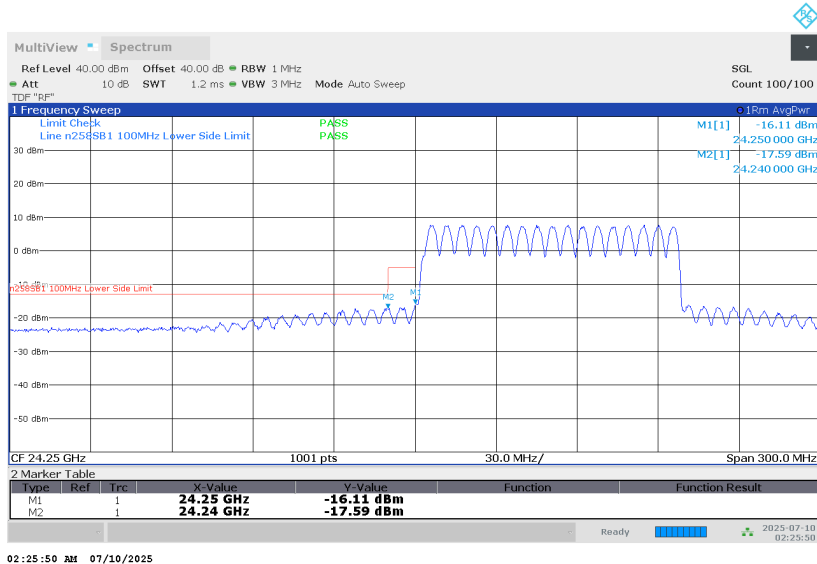


100 MHz, MIMO, 1CC, QPSK

High-side, Single RB

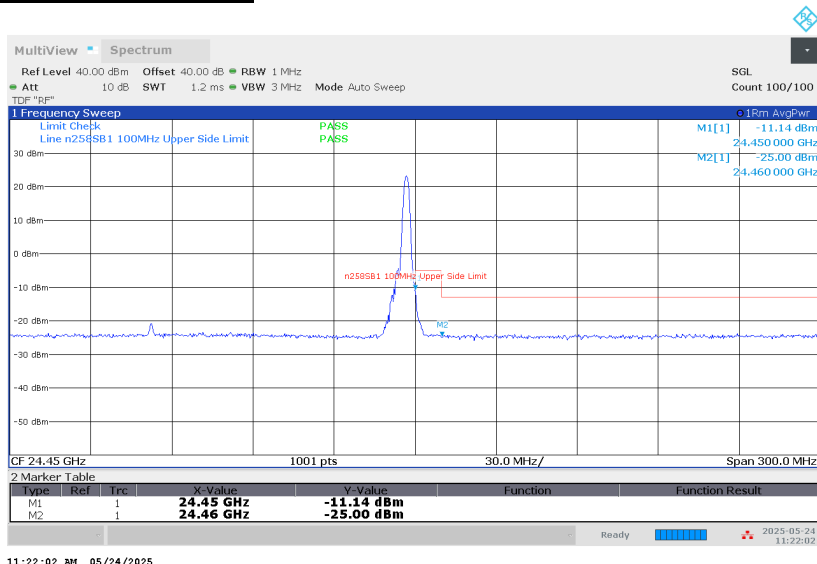

High-side, Full RB

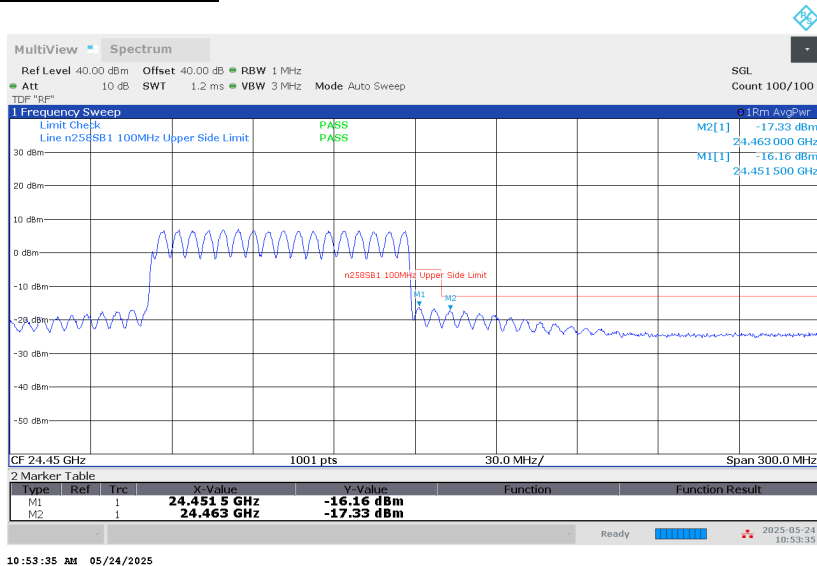


100 MHz, MIMO, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-8.05	16.80	-24.85	-5.00	-19.85
			24.24	-23.77	16.80	-40.57	-13.00	-27.57
	L	66/0	24.25	-16.11	16.80	-32.91	-5.00	-27.91
			24.24	-17.59	16.80	-34.39	-13.00	-21.39
	H	1/65	24.45	-11.14	16.80	-27.94	-5.00	-22.94
			24.46	-25.00	16.80	-41.80	-13.00	-28.80
	H	66/0	24.452	-16.16	16.80	-32.96	-5.00	-27.96
			24.463	-17.33	16.80	-34.13	-13.00	-21.13


8.3.6. BAND EDGE n258 SB1 MIMO 2CC

50 MHz, MIMO, 2CC, QPSK

Low-side, Single RB

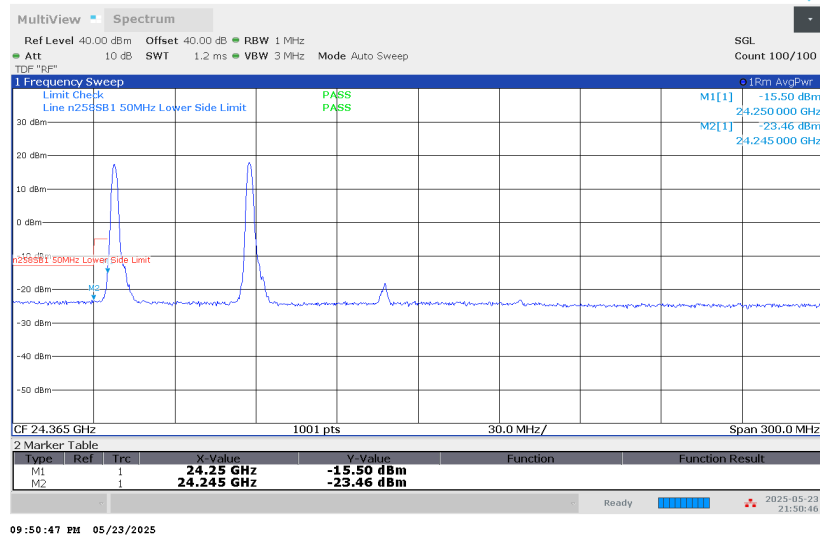


Low-side, Full RB

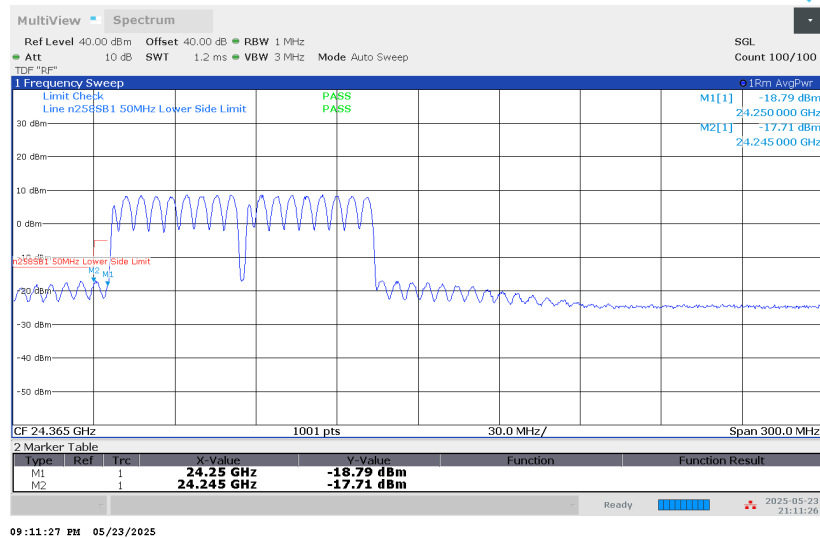


50 MHz, MIMO, 2CC, QPSK

High-side, Single RB

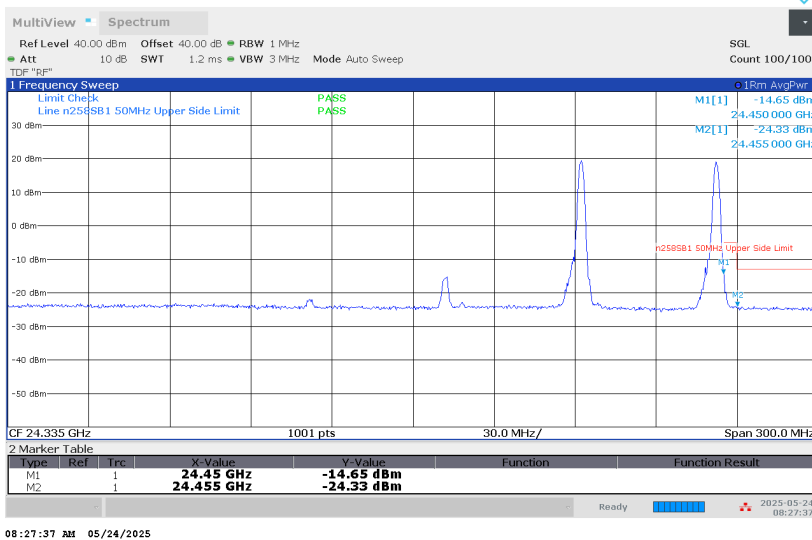

High-side, Full RB

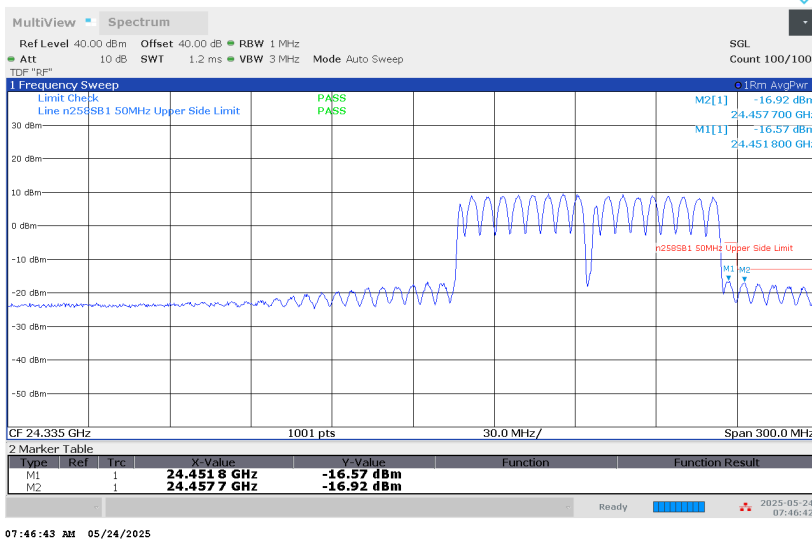


50 MHz, MIMO, 2CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-15.50	16.80	-32.30	-5.00	-27.30
			24.245	-23.46	16.80	-40.26	-13.00	-27.26
	L	32/0	24.25	-18.79	16.80	-35.59	-5.00	-30.59
			24.245	-17.71	16.80	-34.51	-13.00	-21.51
	H	1/31	24.45	-14.65	16.80	-31.45	-5.00	-26.45
			24.455	-24.33	16.80	-41.13	-13.00	-28.13
	H	32/0	24.452	-16.57	16.80	-33.37	-5.00	-28.37
			24.458	-16.92	16.80	-33.72	-13.00	-20.72

100 MHz, MIMO, 2CC, QPSK

Low-side, Single RB

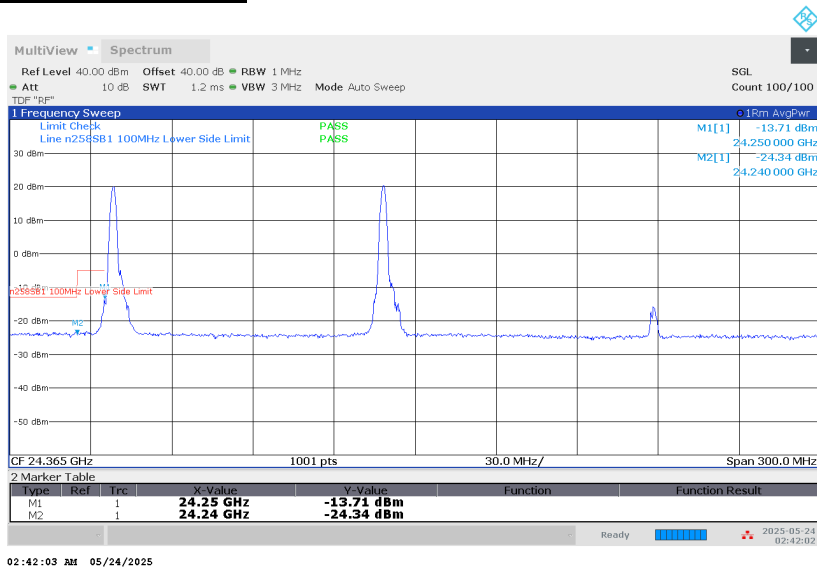


Low-side, Full RB




100 MHz, MIMO, 2CC, QPSK

High-side, Single RB

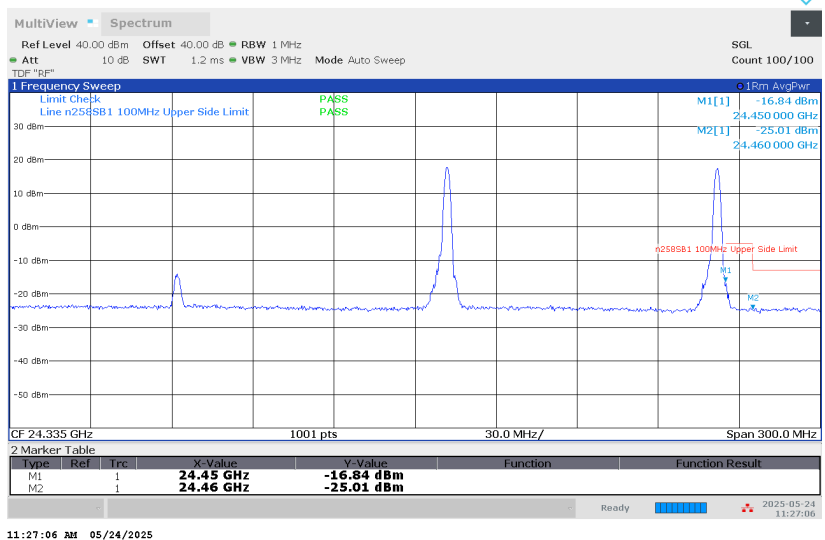

High-side, Full RB

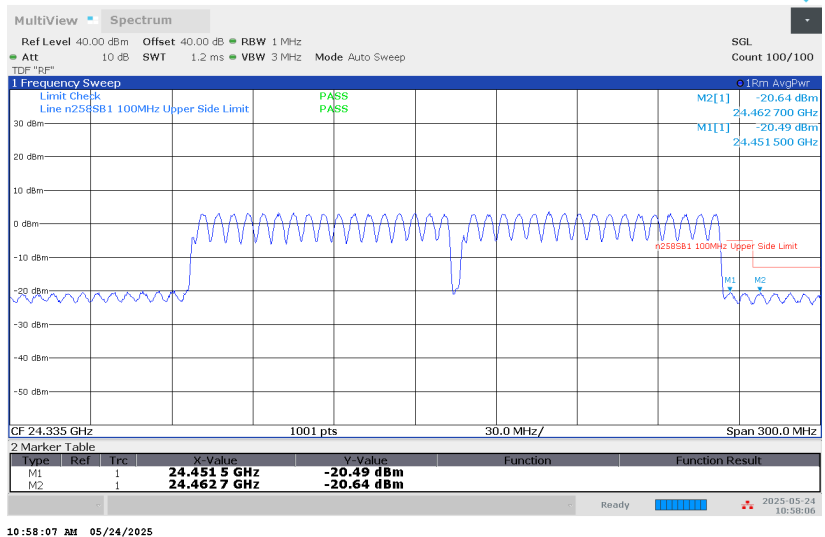


100 MHz, MIMO, 2CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-13.71	16.80	-30.51	-5.00	-25.51
			24.24	-24.34	16.80	-41.14	-13.00	-28.14
	L	66/0	24.25	-20.28	16.80	-37.08	-5.00	-32.08
			24.24	-20.56	16.80	-37.36	-13.00	-24.36
	H	1/65	24.45	-16.84	16.80	-33.64	-5.00	-28.64
			24.46	-25.01	16.80	-41.81	-13.00	-28.81
	H	66/0	24.452	-20.49	16.80	-37.29	-5.00	-32.29
			24.463	-20.64	16.80	-37.44	-13.00	-24.44


8.3.7. BAND EDGE n258 SB1 MIMO 3CC

50 MHz, MIMO, 3CC, QPSK

Low-side, Single RB

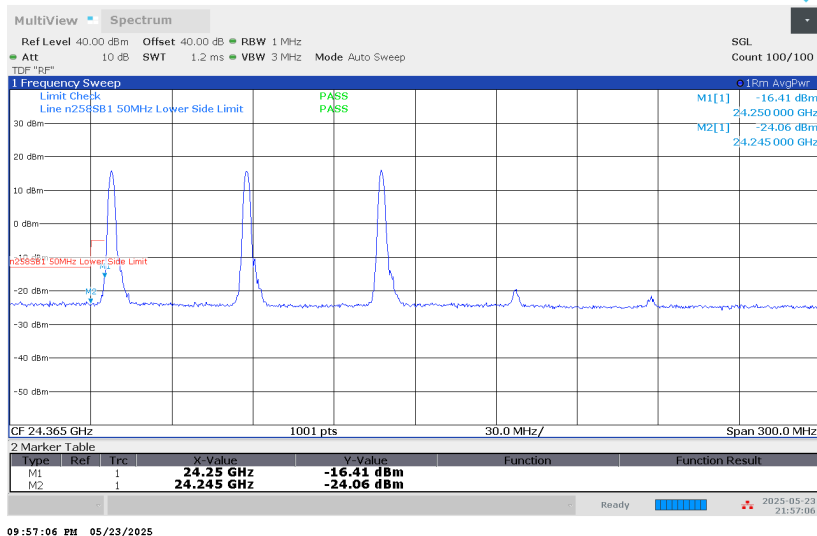


Low-side, Full RB

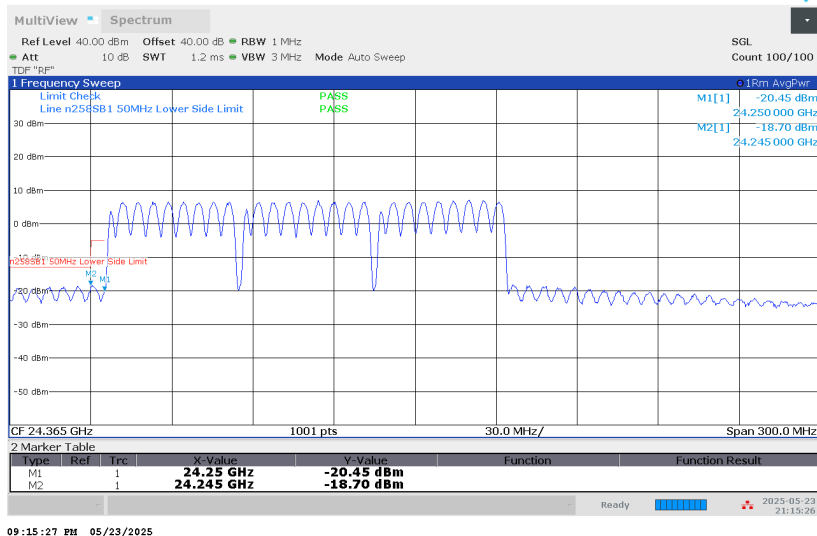


50 MHz, MIMO, 3CC, QPSK

High-side, Single RB

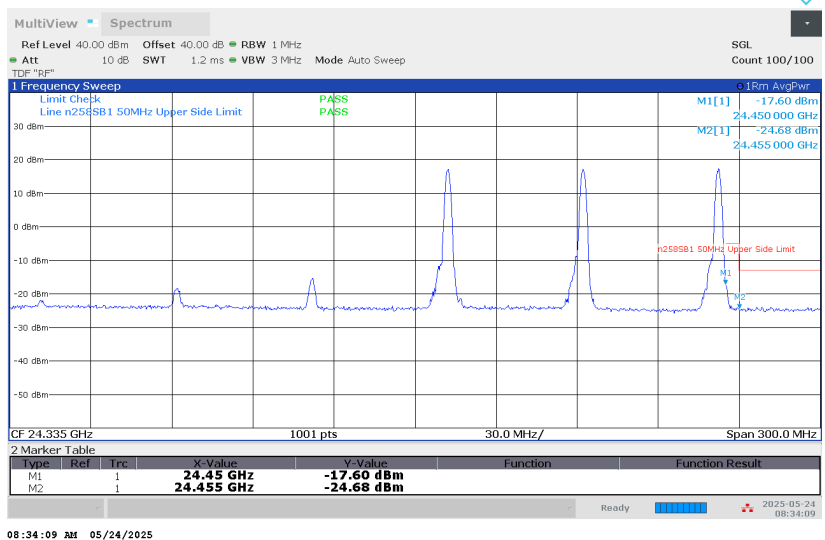

High-side, Full RB

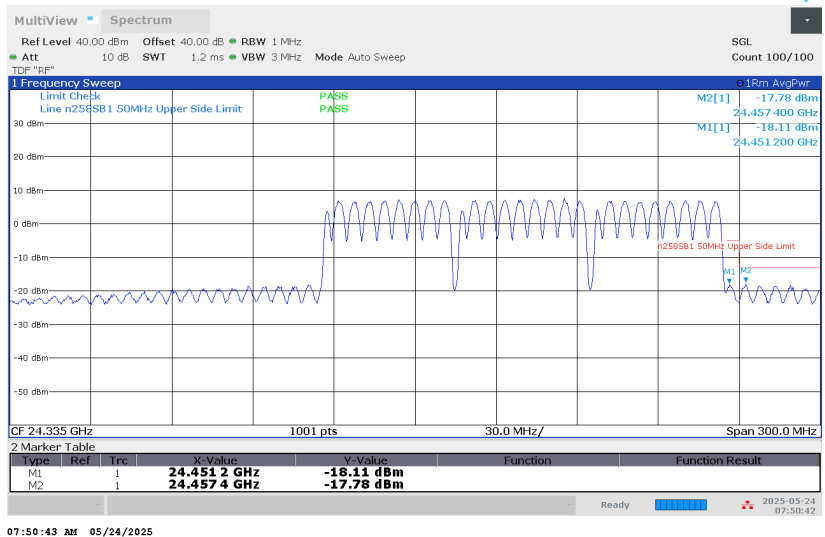


50 MHz, MIMO, 3CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-16.41	16.80	-33.21	-5.00	-28.21
			24.245	-24.06	16.80	-40.86	-13.00	-27.86
	L	32/0	24.25	-20.45	16.80	-37.25	-5.00	-32.25
			24.245	-18.70	16.80	-35.50	-13.00	-22.50
	H	1/31	24.45	-17.60	16.80	-34.40	-5.00	-29.40
			24.455	-24.68	16.80	-41.48	-13.00	-28.48
	H	32/0	24.451	-18.11	16.80	-34.91	-5.00	-29.91
			24.457	-17.78	16.80	-34.58	-13.00	-21.58


8.3.8. BAND EDGE n258 SB1 MIMO 4CC

50 MHz, MIMO, 4CC, QPSK

Low-side, Single RB

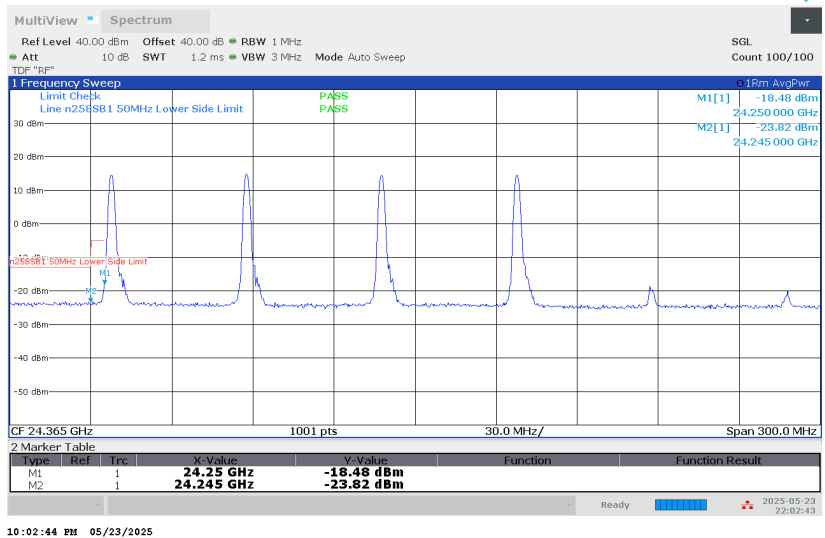


Low-side, Full RB

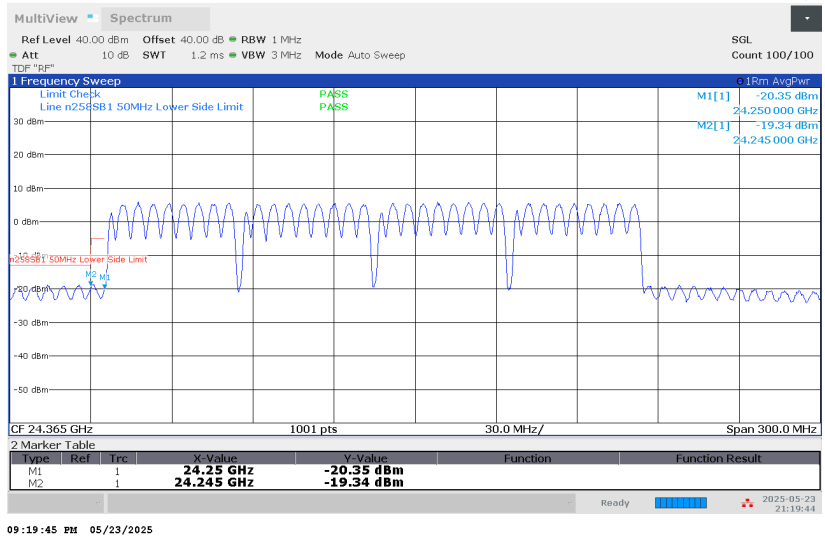


50 MHz, MIMO, 4CC, QPSK

High-side, Single RB

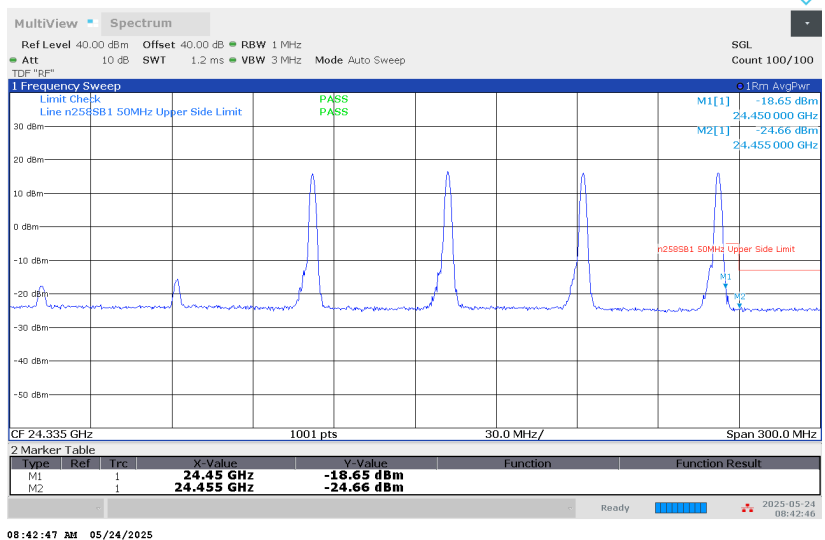

High-side, Full RB

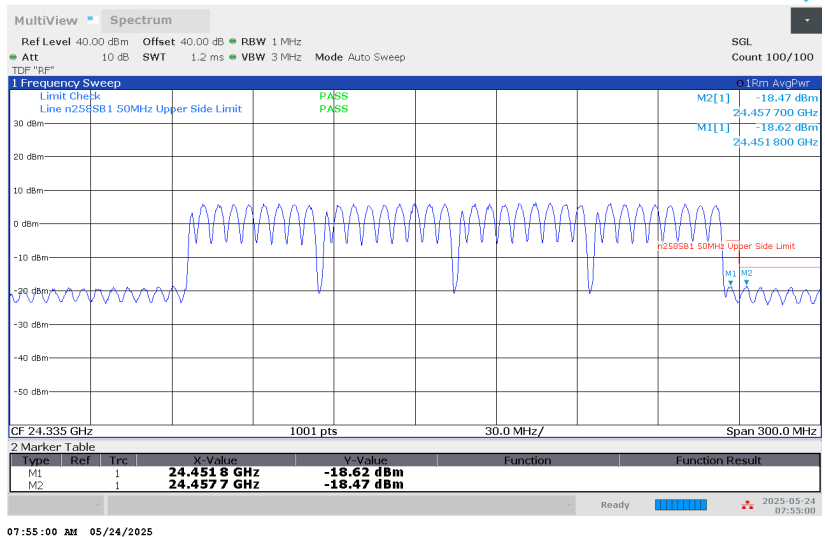


50 MHz, MIMO, 4CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.25	-18.48	16.80	-35.28	-5.00	-30.28
			24.245	-23.82	16.80	-40.62	-13.00	-27.62
	L	32/0	24.25	-20.35	16.80	-37.15	-5.00	-32.15
			24.245	-19.34	16.80	-36.14	-13.00	-23.14
	H	1/31	24.45	-18.65	16.80	-35.45	-5.00	-30.45
			24.455	-24.66	16.80	-41.46	-13.00	-28.46
	H	32/0	24.452	-18.62	16.80	-35.42	-5.00	-30.42
			24.458	-18.47	16.80	-35.27	-13.00	-22.27


8.3.9. BAND EDGE n258 SB2 SISO-DUAL 1CC

50 MHz, SISO-DUAL, 1CC, QPSK

Low-side, Single RB

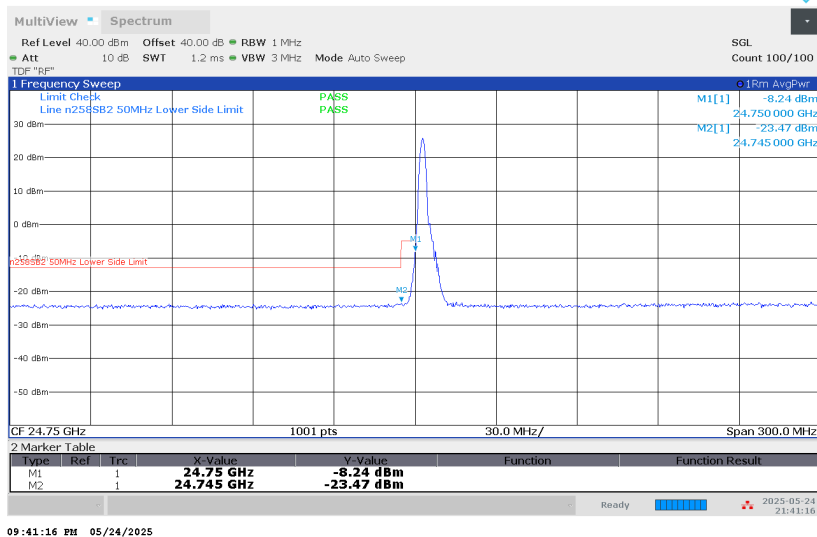


Low-side, Full RB

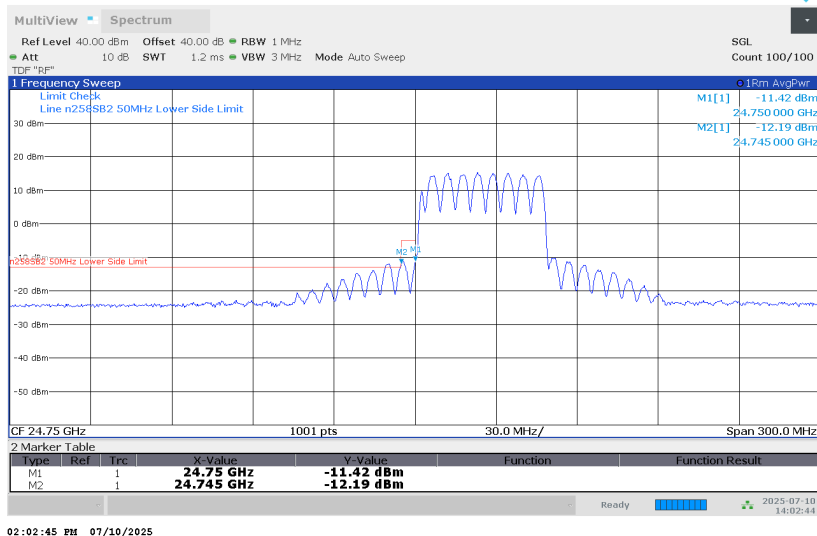


50 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

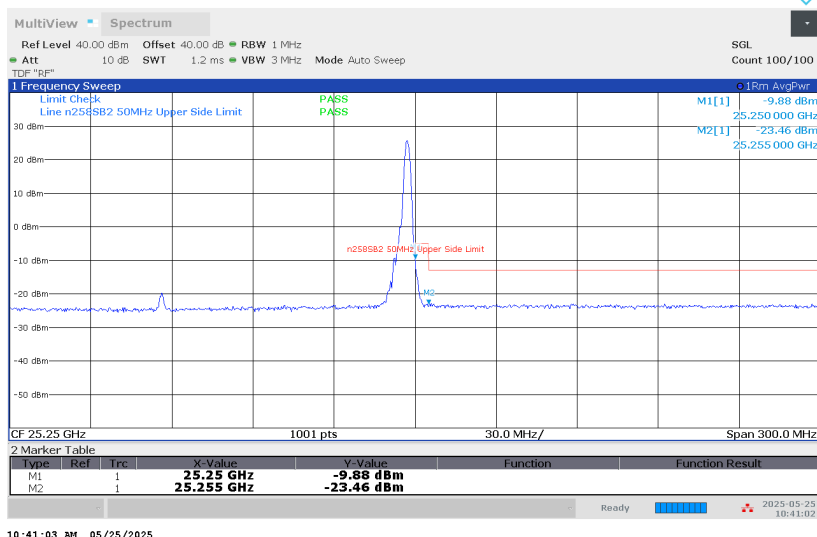

High-side, Full RB

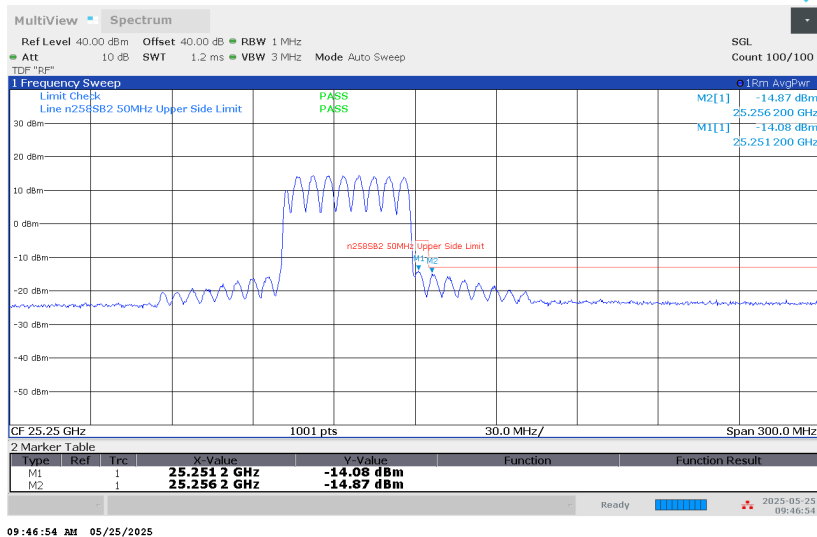

50 MHz, SISO-DUAL, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.75	-8.24	16.80	-25.04	-5.00	-20.04
			24.745	-23.47	16.80	-40.27	-13.00	-27.27
	L	32/0	24.75	-11.42	16.80	-28.22	-5.00	-23.22
			24.745	-12.19	16.80	-28.99	-13.00	-15.99
	H	1/31	25.25	-9.88	16.80	-26.68	-5.00	-21.68
			25.255	-23.46	16.80	-40.26	-13.00	-27.26
	H	32/0	25.251	-14.08	16.80	-30.88	-5.00	-25.88
			25.256	-14.87	16.80	-31.67	-13.00	-18.67

50 MHz, SISO-DUAL, 1CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.75	-9.21	16.80	-26.01	-5.00	-21.01
			24.745	-24.39	16.80	-41.19	-13.00	-28.19
	L	32/0	24.75	-16.29	16.80	-33.09	-5.00	-28.09
			24.745	-18.13	16.80	-34.93	-13.00	-21.93
	H	1/31	25.25	-10.78	16.80	-27.58	-5.00	-22.58
			25.255	-22.68	16.80	-39.48	-13.00	-26.48
	H	32/0	25.25	-19.02	16.80	-35.82	-5.00	-30.82
			25.255	-21.40	16.80	-38.20	-13.00	-25.20

50 MHz, SISO-DUAL, 1CC, 16QAM


BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.75	-11.12	16.80	-27.92	-5.00	-22.92
			24.745	-23.58	16.80	-40.38	-13.00	-27.38
	L	32/0	24.75	-17.18	16.80	-33.98	-5.00	-28.98
			24.745	-17.89	16.80	-34.69	-13.00	-21.69
	H	1/31	25.25	-10.92	16.80	-27.72	-5.00	-22.72
			25.255	-23.31	16.80	-40.11	-13.00	-27.11
	H	32/0	25.25	-18.88	16.80	-35.68	-5.00	-30.68
			25.255	-21.88	16.80	-38.68	-13.00	-25.68

50 MHz, SISO-DUAL, 1CC, 64QAM


BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
50	L	1/0	24.75	-11.51	16.80	-28.31	-5.00	-23.31
			24.745	-24.11	16.80	-40.91	-13.00	-27.91
	L	32/0	24.75	-21.54	16.80	-38.34	-5.00	-33.34
			24.745	-22.52	16.80	-39.32	-13.00	-26.32
	H	1/31	25.25	-12.20	16.80	-29.00	-5.00	-24.00
			25.255	-23.41	16.80	-40.21	-13.00	-27.21
	H	32/0	25.25	-21.19	16.80	-37.99	-5.00	-32.99
			25.255	-23.55	16.80	-40.35	-13.00	-27.35

100 MHz, SISO-DUAL, 1CC, QPSK

Low-side, Single RB

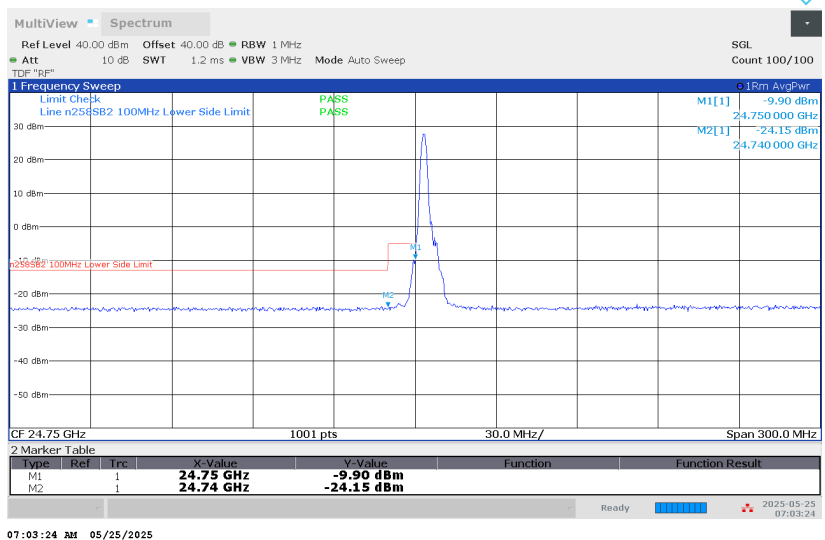


Low-side, Full RB

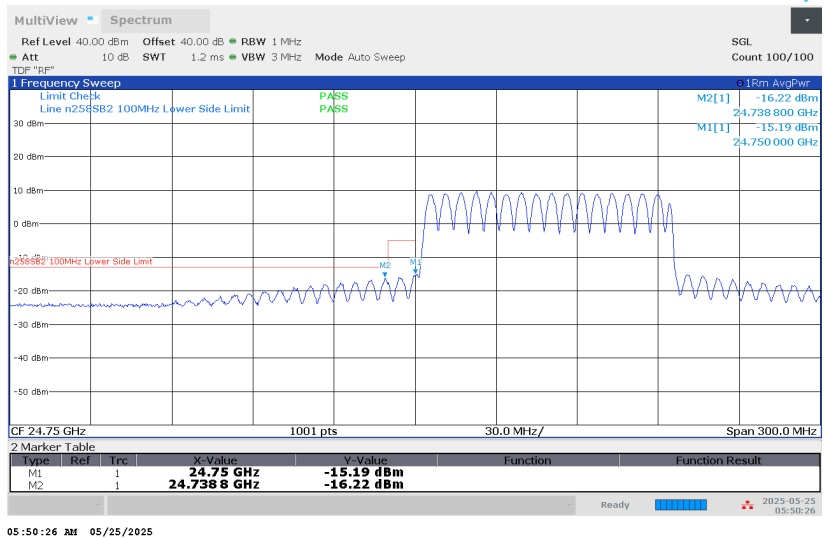


100 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

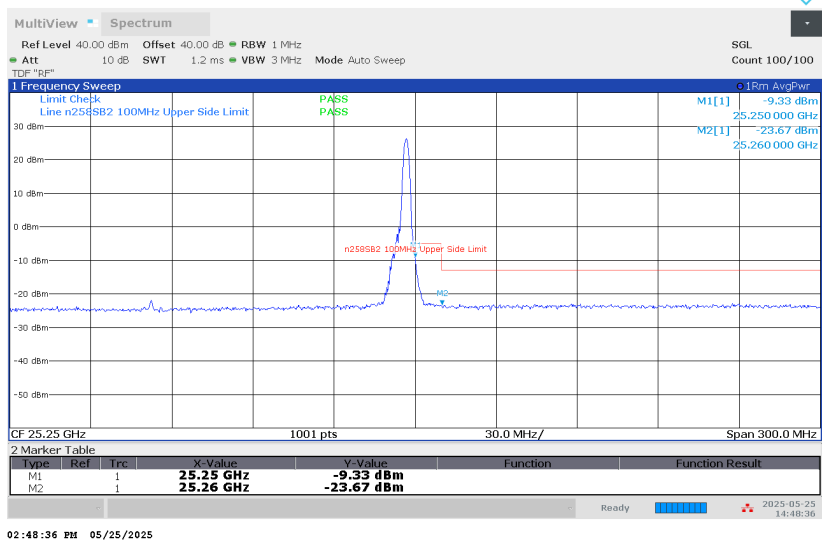

High-side, Full RB

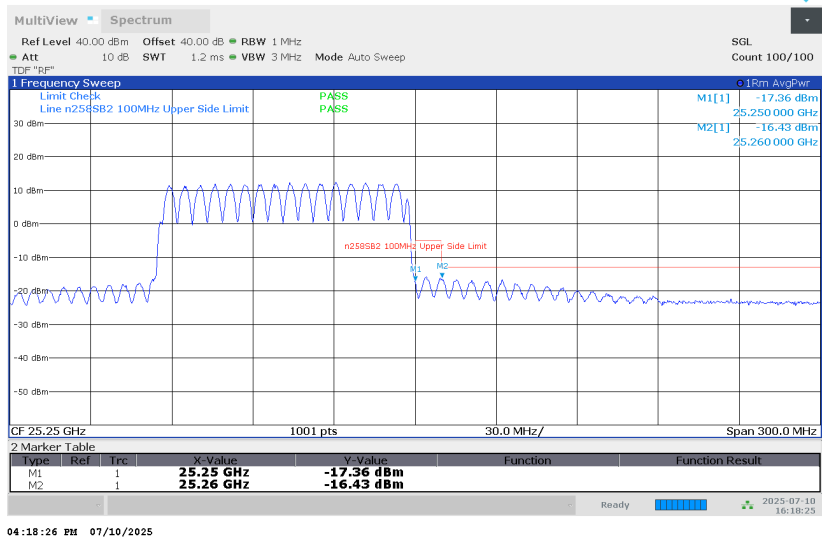

100 MHz, SISO-DUAL, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	1/0	24.75	-9.90	16.80	-26.70	-5.00	-21.70
			24.74	-24.15	16.80	-40.95	-13.00	-27.95
	L	64/0	24.75	-15.19	16.80	-31.99	-5.00	-26.99
			24.739	-16.22	16.80	-33.02	-13.00	-20.02
	H	1/65	25.25	-9.33	16.80	-26.13	-5.00	-21.13
			25.26	-23.67	16.80	-40.47	-13.00	-27.47
	H	64/2	25.25	-17.36	16.80	-34.16	-5.00	-29.16
			25.26	-16.43	16.80	-33.23	-13.00	-20.23

100 MHz, SISO-DUAL, 1CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	64/0	24.75	-19.51	16.80	-36.31	-5.00	-31.31
			24.74	-23.41	16.80	-40.21	-13.00	-27.21
	H	64/2	25.25	-20.07	16.80	-36.87	-5.00	-31.87
			25.26	-21.49	16.80	-38.29	-13.00	-25.29

100 MHz, SISO-DUAL, 1CC, 16QAM

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	64/0	24.75	-20.82	16.80	-37.62	-5.00	-32.62
			24.74	-23.33	16.80	-40.13	-13.00	-27.13
	H	64/2	25.25	-21.06	16.80	-37.86	-5.00	-32.86
			25.26	-20.31	16.80	-37.11	-13.00	-24.11

100 MHz, SISO-DUAL, 1CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	EUT Ant Gain	Adj. EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
100	L	64/0	24.75	-22.96	16.80	-39.76	-5.00	-34.76
			24.74	-24.55	16.80	-41.35	-13.00	-28.35
	H	64/2	25.25	-22.71	16.80	-39.51	-5.00	-34.51
			25.26	-22.97	16.80	-39.77	-13.00	-26.77

8.3.10. BAND EDGE n258 SB2 SISO-DUAL 2CC

50 MHz, SISO-DUAL, 2CC, QPSK

