



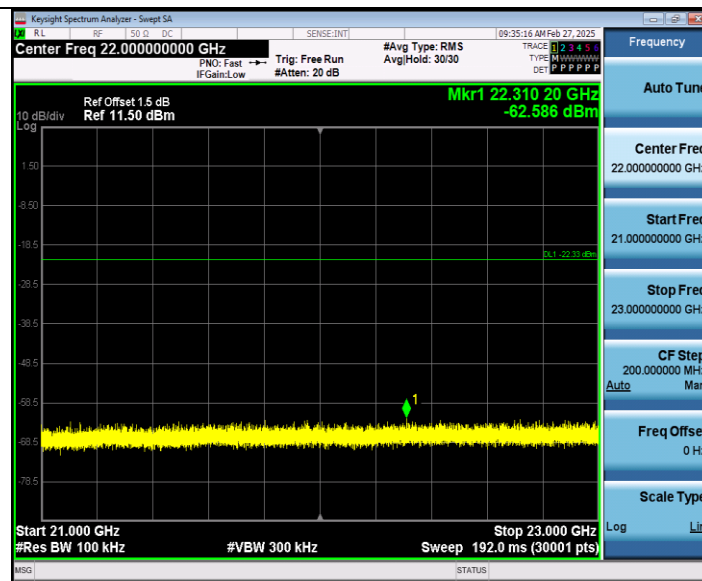


3DH5_Ant1_2480_23000~25000

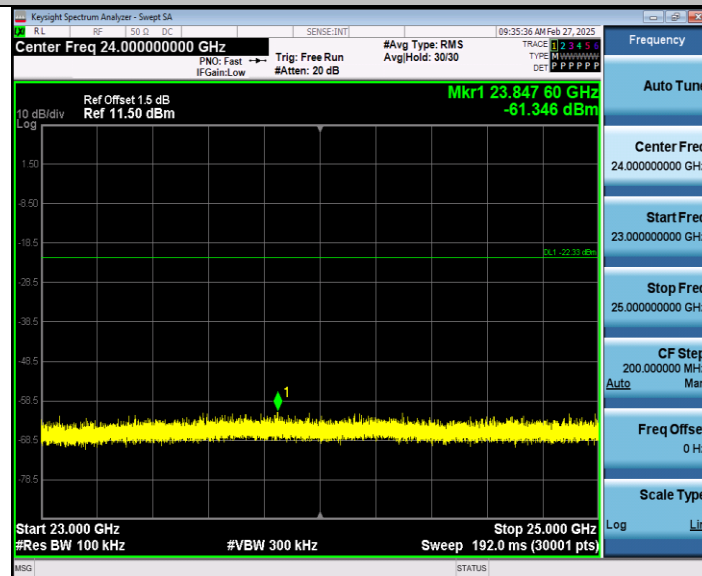


Appendix H: Duty Cycle

TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]
DH5	Ant1	2402	30.00	0.00	100
		2441	30.00	0.00	100
		2480	30.00	0.00	100
2DH5	Ant1	2402	30.00	0.00	100
		2441	30.00	0.00	100
		2480	30.00	0.00	100
3DH5	Ant1	2402	30.00	0.00	100
		2441	30.00	0.00	100
		2480	30.00	0.00	100


DH5_Ant1_2402

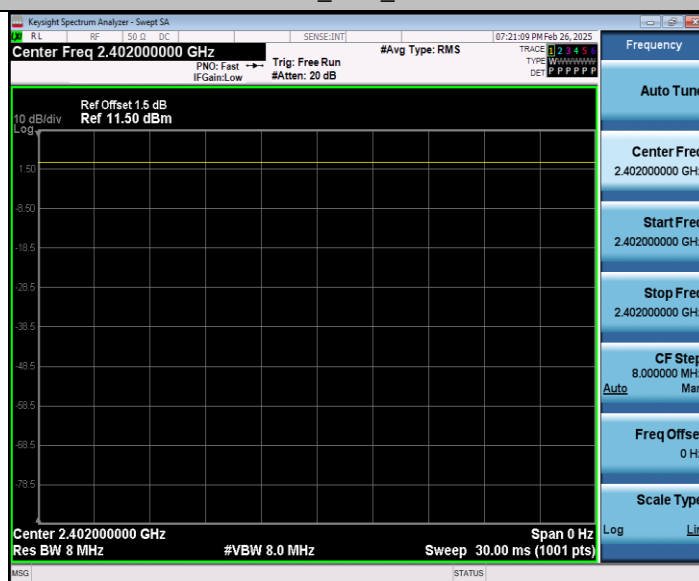


DH5_Ant1_2441

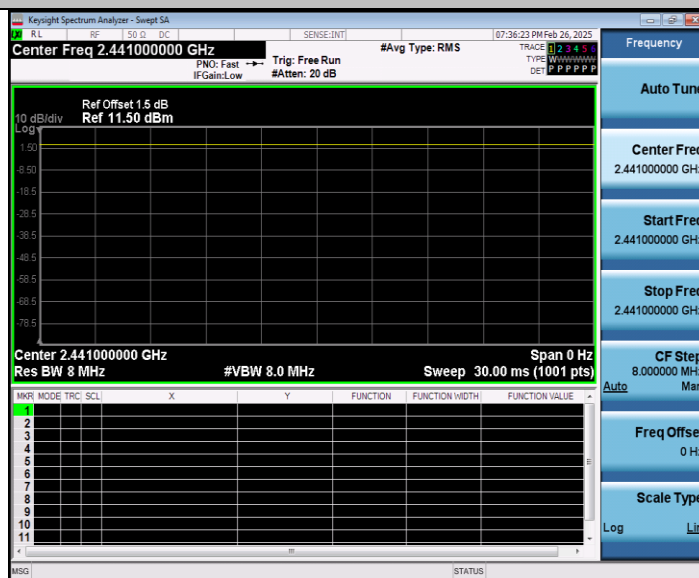


DH5_Ant1_2480

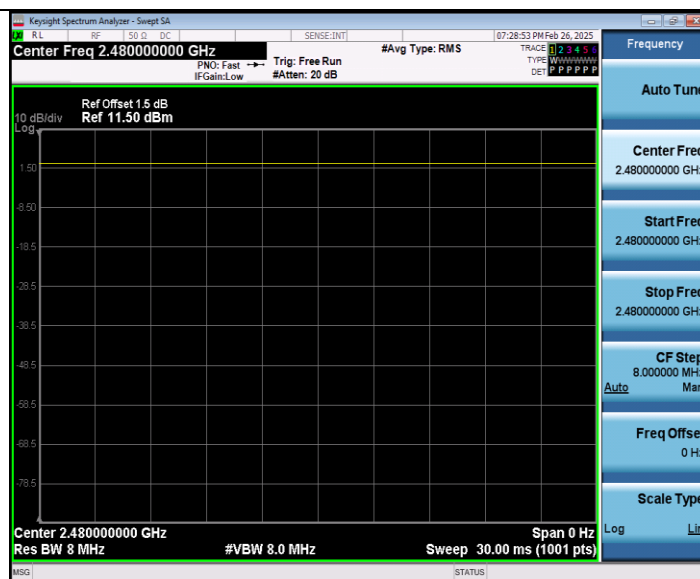


2DH5 Ant1 2402

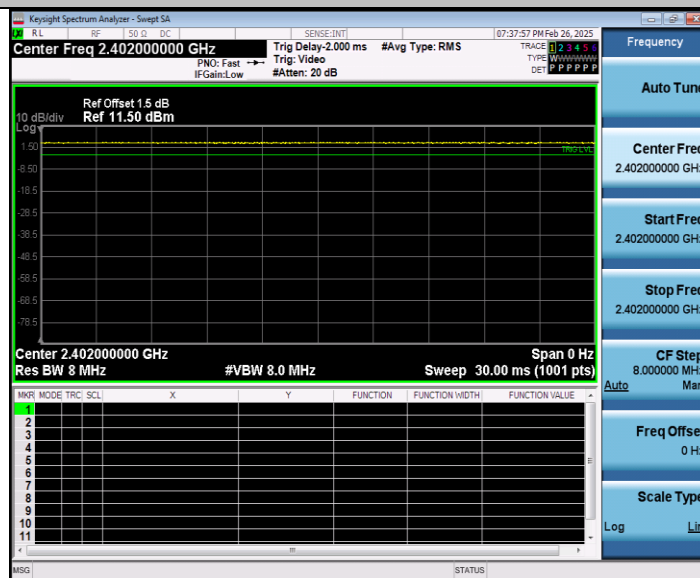


2DH5 Ant1 2441

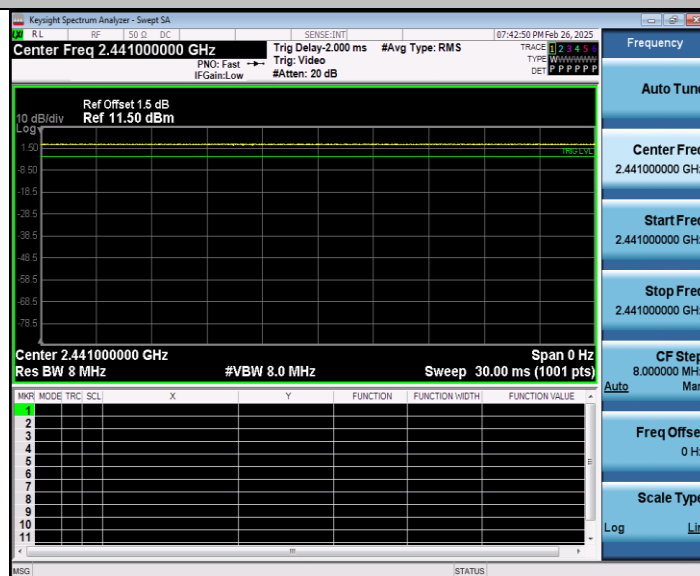


2DH5 Ant1 2480

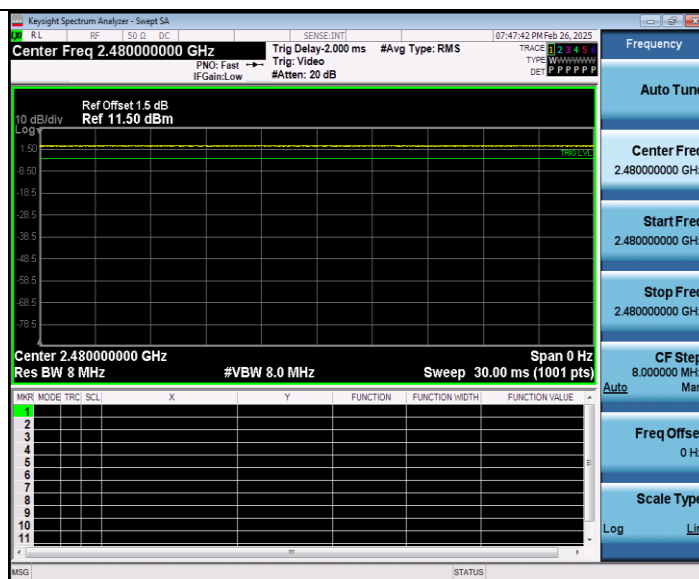


3DH5_Ant1_2402

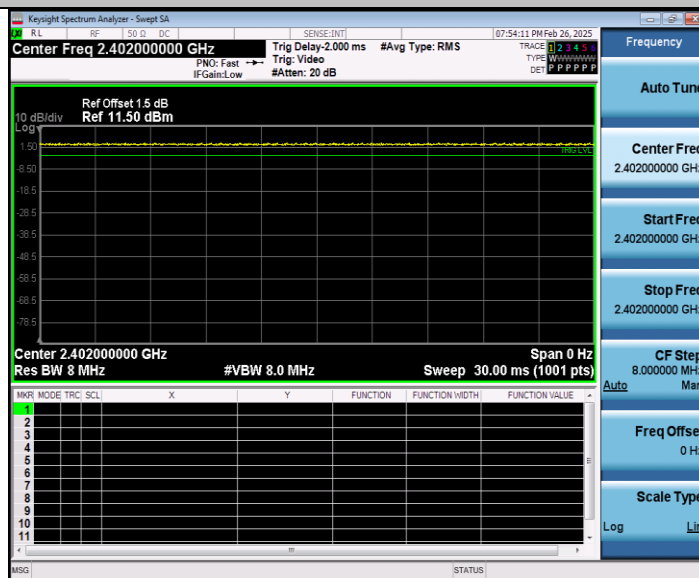

3DH5_Ant1_2441

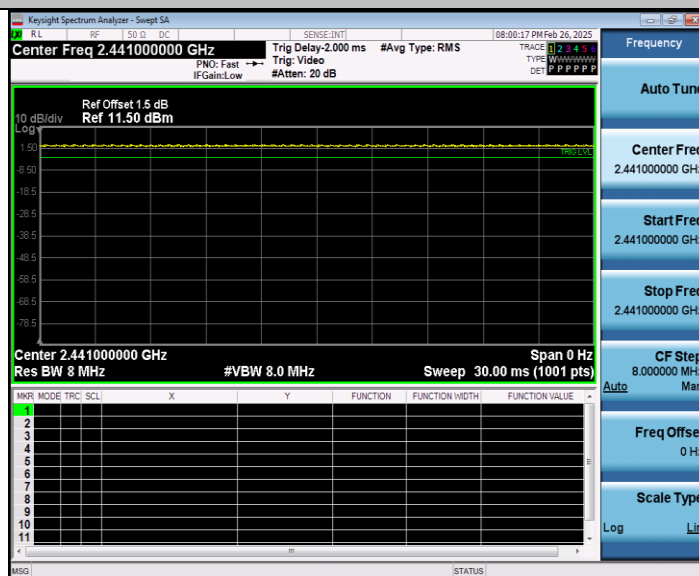

3DH5_Ant1_2480

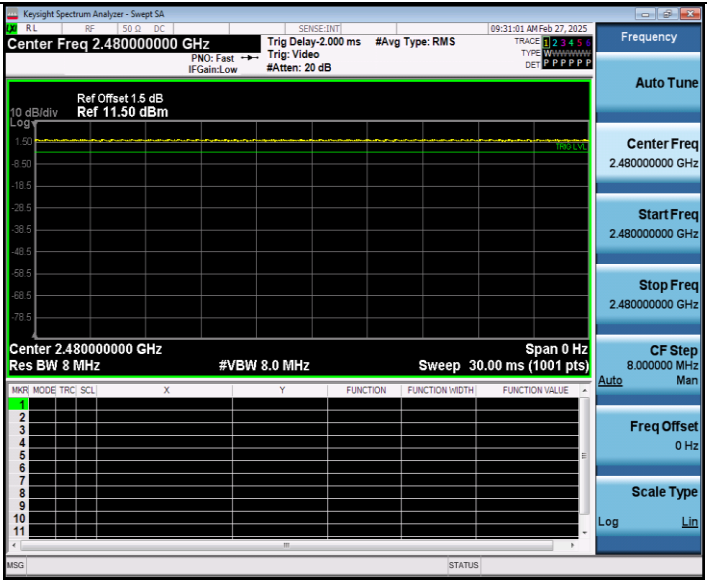


Appendix I: Emissions in Restricted Band

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode1:Transmit at 2402MHz by DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25℃ ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

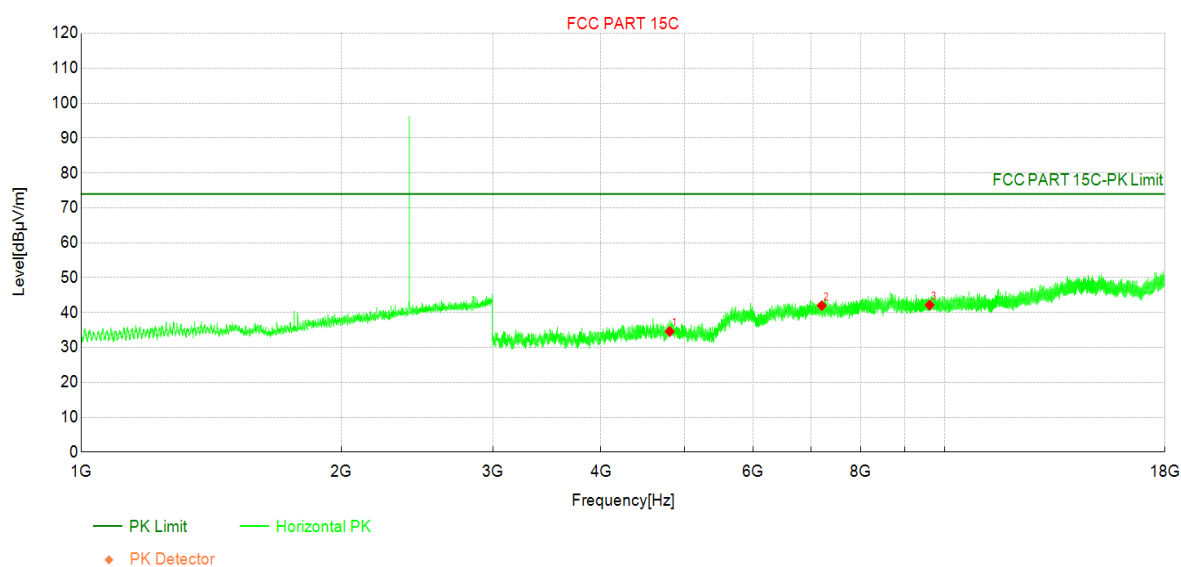

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4804	40.6	34.57	-6.03	74	39.43	PK	Horizontal	PASS
	4804	-	9.81	-	54	44.19	AV	Horizontal	PASS
2	7206	39	41.97	2.97	74	32.03	PK	Horizontal	PASS
	7206	-	17.21	-	54	36.79	AV	Horizontal	PASS
3	9608	36.21	42.15	5.94	74	31.85	PK	Horizontal	PASS
	9608	-	17.39	-	54	36.61	AV	Horizontal	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode1:Transmit at 2402MHz by DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

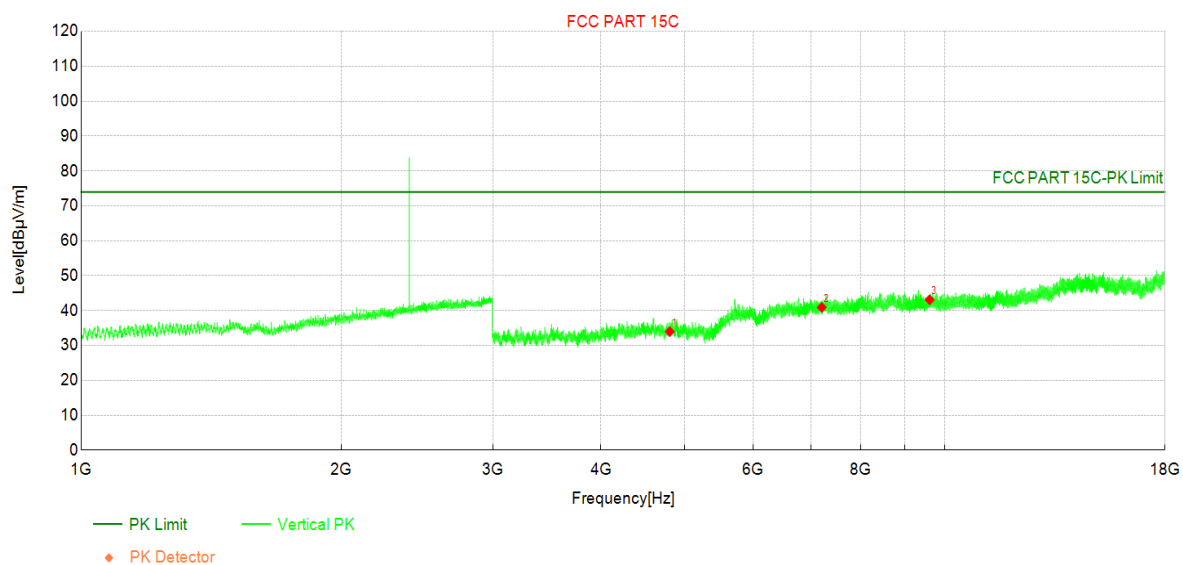

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4804	39.99	33.96	-6.03	74	40.04	PK	Vertical	PASS
	4804	-	9.2	-	54	44.8	AV	Vertical	PASS
2	7206	37.94	40.91	2.97	74	33.09	PK	Vertical	PASS
	7206	-	16.15	-	54	37.85	AV	Vertical	PASS
3	9608	37.15	43.09	5.94	74	30.91	PK	Vertical	PASS
	9608	-	18.33	-	54	35.67	AV	Vertical	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode1:Transmit at 2441MHz by DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

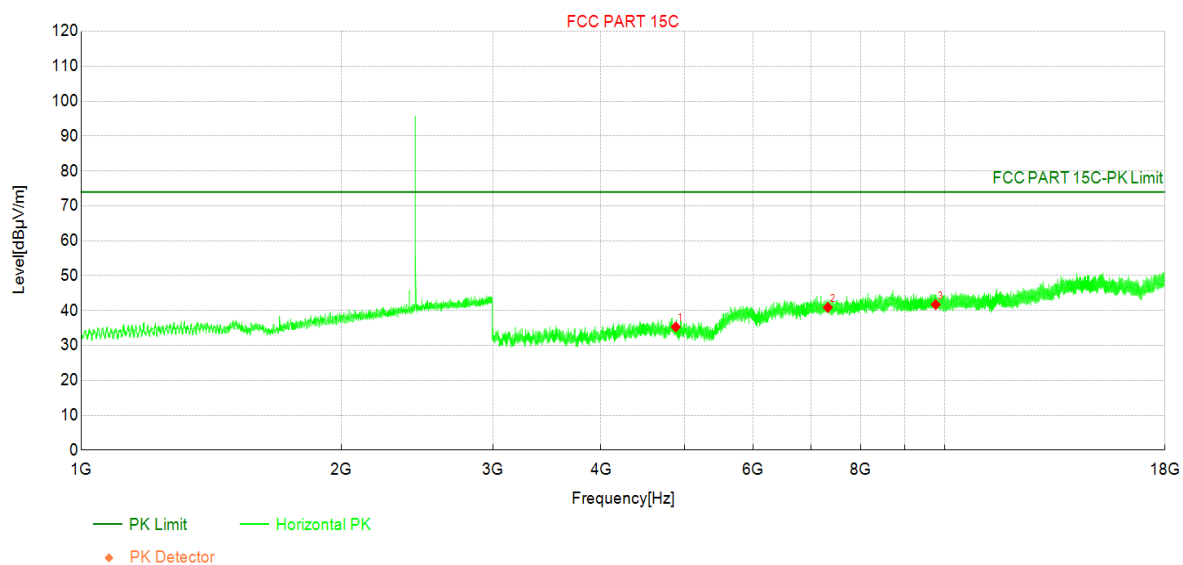

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4882	41.37	35.29	-6.08	74	38.71	PK	Horizontal	PASS
	4882	-	10.53	-	54	43.47	AV	Horizontal	PASS
2	7323	38.1	40.88	2.78	74	33.12	PK	Horizontal	PASS
	7323	-	16.12	-	54	37.88	AV	Horizontal	PASS
3	9764	35.6	41.72	6.12	74	32.28	PK	Horizontal	PASS
	9764	-	16.96	-	54	37.04	AV	Horizontal	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode1:Transmit at 2441MHz by DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

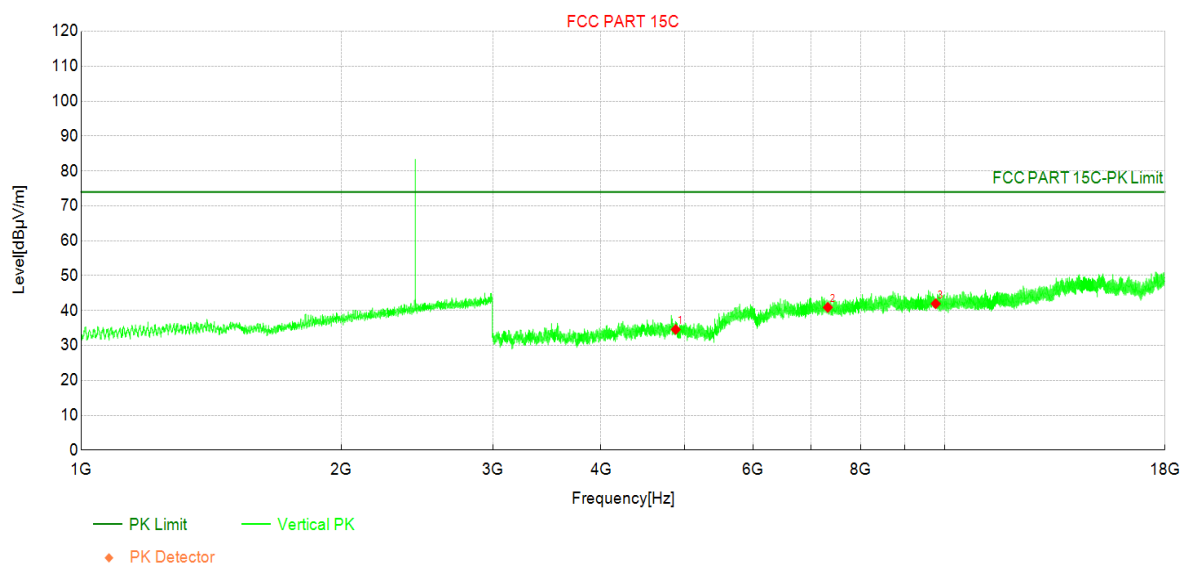

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4882	40.66	34.58	-6.08	74	39.42	PK	Vertical	PASS
	4882	-	9.82	-	54	44.18	AV	Vertical	PASS
2	7323	38.13	40.91	2.78	74	33.09	PK	Vertical	PASS
	7323	-	16.15	-	54	37.85	AV	Vertical	PASS
3	9764	35.84	41.96	6.12	74	32.04	PK	Vertical	PASS
	9764	-	17.2	-	54	36.8	AV	Vertical	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode1:Transmit at 2480MHz by DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

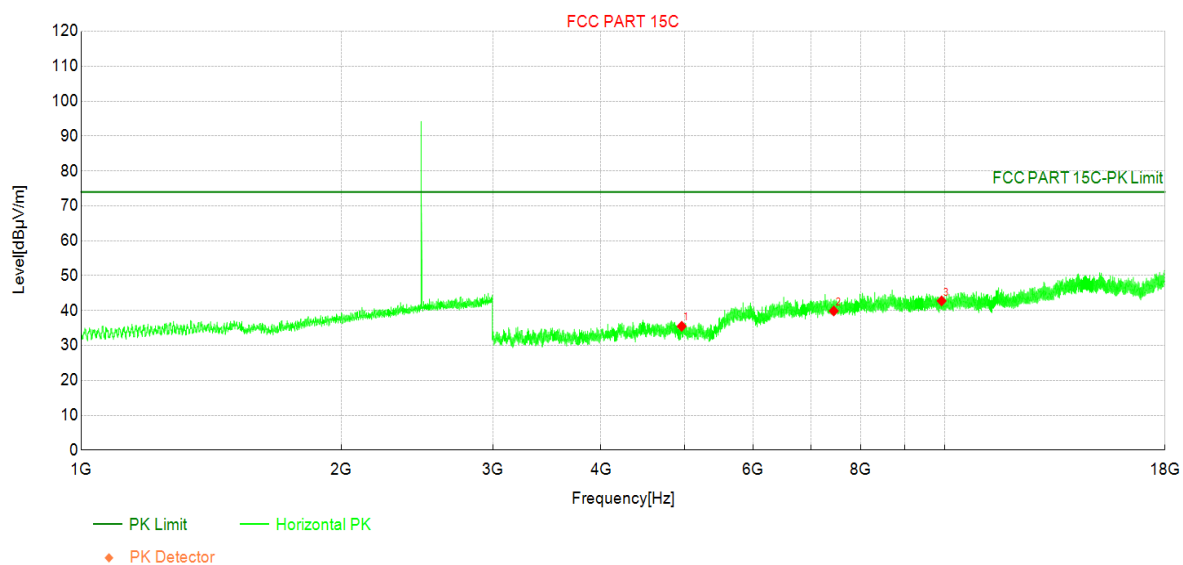

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4960	40.76	35.49	-5.27	74	38.51	PK	Horizontal	PASS
	4960	-	10.73	-	54	43.27	AV	Horizontal	PASS
2	7440	37.33	39.89	2.56	74	34.11	PK	Horizontal	PASS
	7440	-	15.13	-	54	38.87	AV	Horizontal	PASS
3	9920	37.15	42.77	5.62	74	31.23	PK	Horizontal	PASS
	9920	-	18.01	-	54	35.99	AV	Horizontal	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode1:Transmit at 2480MHz by DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

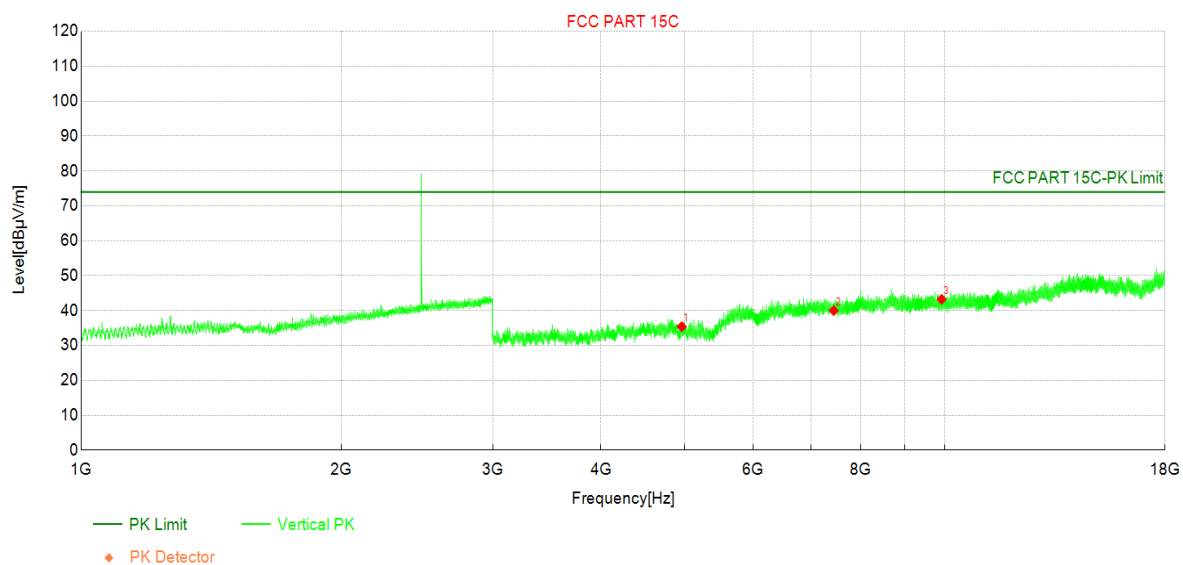

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4960	40.65	35.38	-5.27	74	38.62	PK	Vertical	PASS
	4960	-	10.62	-	54	43.38	AV	Vertical	PASS
2	7440	37.42	39.98	2.56	74	34.02	PK	Vertical	PASS
	7440	-	15.22	-	54	38.78	AV	Vertical	PASS
3	9920	37.59	43.21	5.62	74	30.79	PK	Vertical	PASS
	9920	-	18.45	-	54	35.55	AV	Vertical	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode2:Transmit at 2402MHz by 2DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

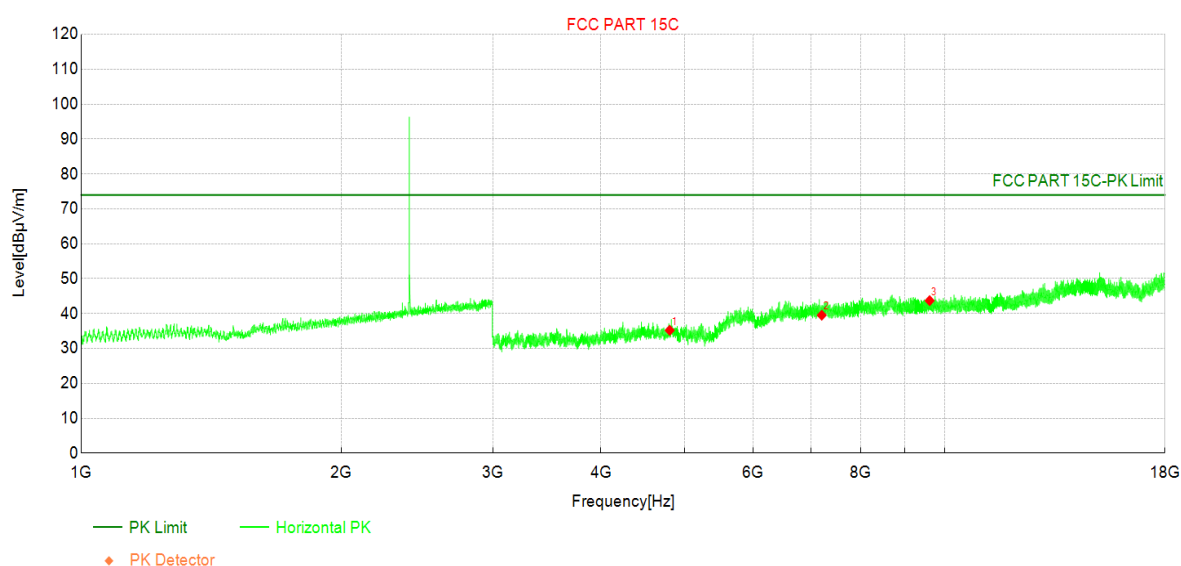

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4804	41.24	35.21	-6.03	74	38.79	PK	Horizontal	PASS
	4804	-	10.45	-	54	43.55	AV	Horizontal	PASS
2	7206	36.55	39.52	2.97	74	34.48	PK	Horizontal	PASS
	7206	-	14.76	-	54	39.24	AV	Horizontal	PASS
3	9608	37.77	43.71	5.94	74	30.29	PK	Horizontal	PASS
	9608	-	18.95	-	54	35.05	AV	Horizontal	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode2:Transmit at 2402MHz by 2DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

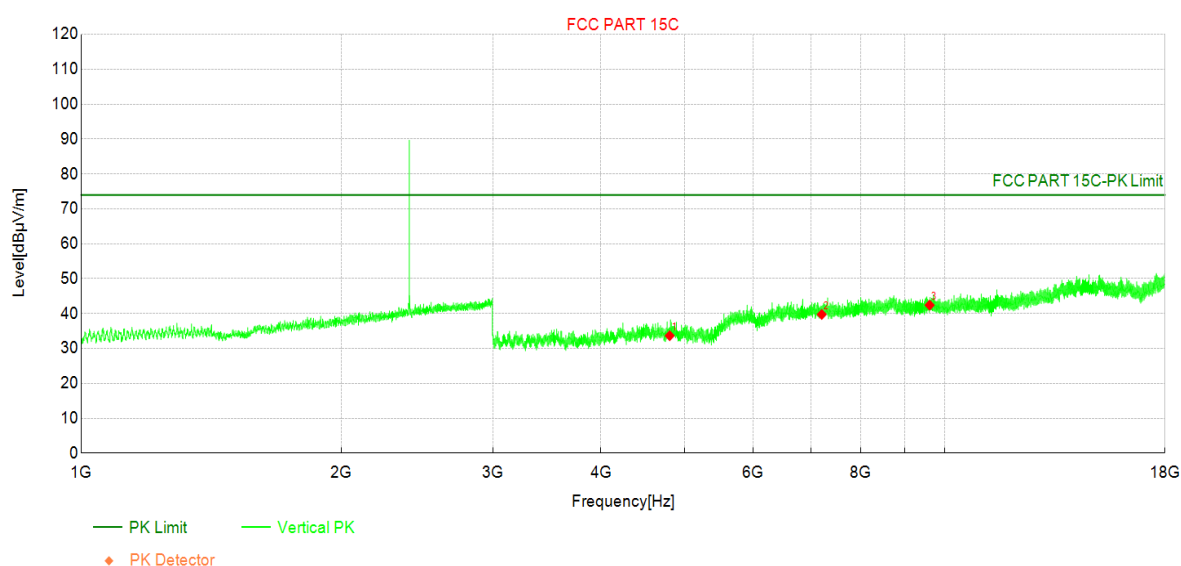

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4804	39.67	33.64	-6.03	74	40.36	PK	Vertical	PASS
	4804	-	8.88	-	54	45.12	AV	Vertical	PASS
2	7206	36.77	39.74	2.97	74	34.26	PK	Vertical	PASS
	7206	-	14.98	-	54	39.02	AV	Vertical	PASS
3	9608	36.47	42.41	5.94	74	31.59	PK	Vertical	PASS
	9608	-	17.65	-	54	36.35	AV	Vertical	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode2:Transmit at 2441MHz by 2DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

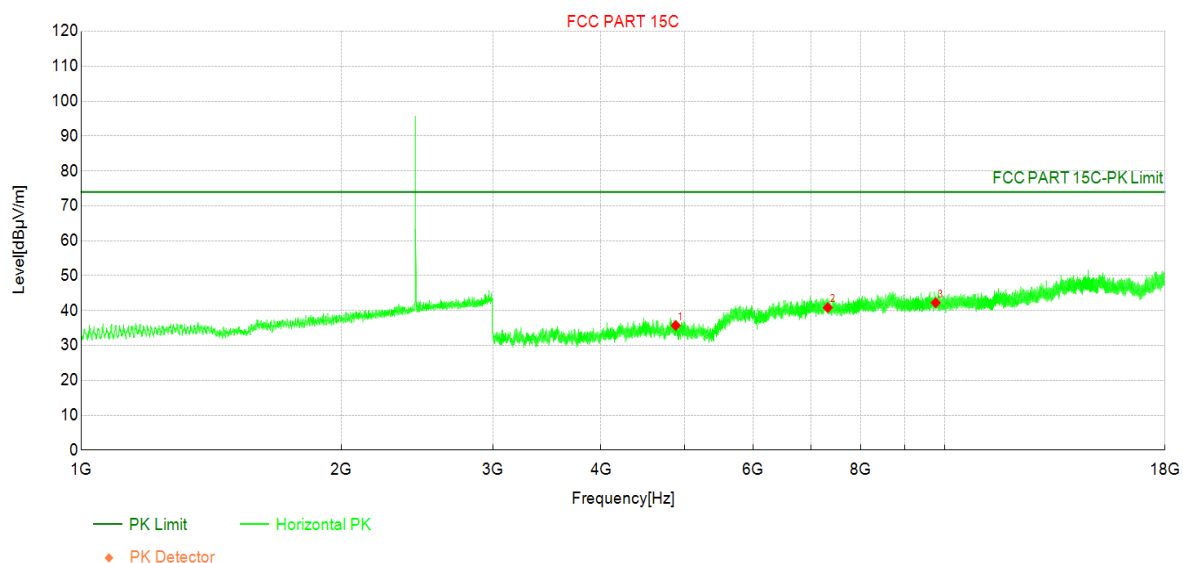

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4882	41.8	35.72	-6.08	74	38.28	PK	Horizontal	PASS
	4882	-	10.96	-	54	43.04	AV	Horizontal	PASS
2	7323	38.05	40.83	2.78	74	33.17	PK	Horizontal	PASS
	7323	-	16.07	-	54	37.93	AV	Horizontal	PASS
3	9764	36.12	42.24	6.12	74	31.76	PK	Horizontal	PASS
	9764	-	17.48	-	54	36.52	AV	Horizontal	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode2:Transmit at 2441MHz by 2DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

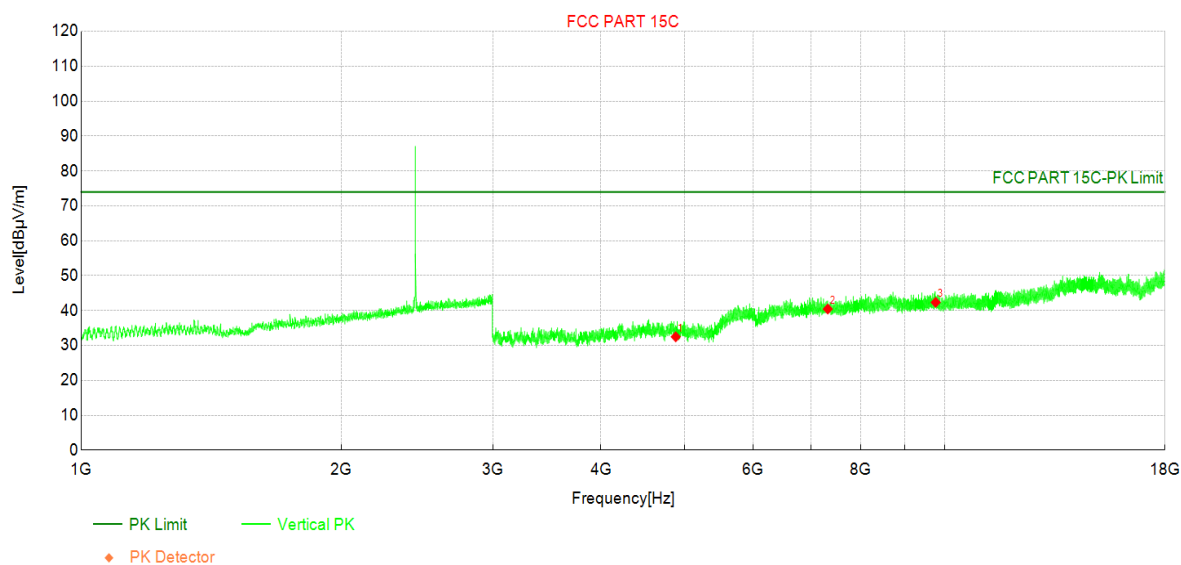

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4882	38.55	32.47	-6.08	74	41.53	PK	Vertical	PASS
	4882	-	7.71	-	54	46.29	AV	Vertical	PASS
2	7323	37.66	40.44	2.78	74	33.56	PK	Vertical	PASS
	7323	-	15.68	-	54	38.32	AV	Vertical	PASS
3	9764	36.23	42.35	6.12	74	31.65	PK	Vertical	PASS
	9764	-	17.59	-	54	36.41	AV	Vertical	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode2:Transmit at 2480MHz by 2DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

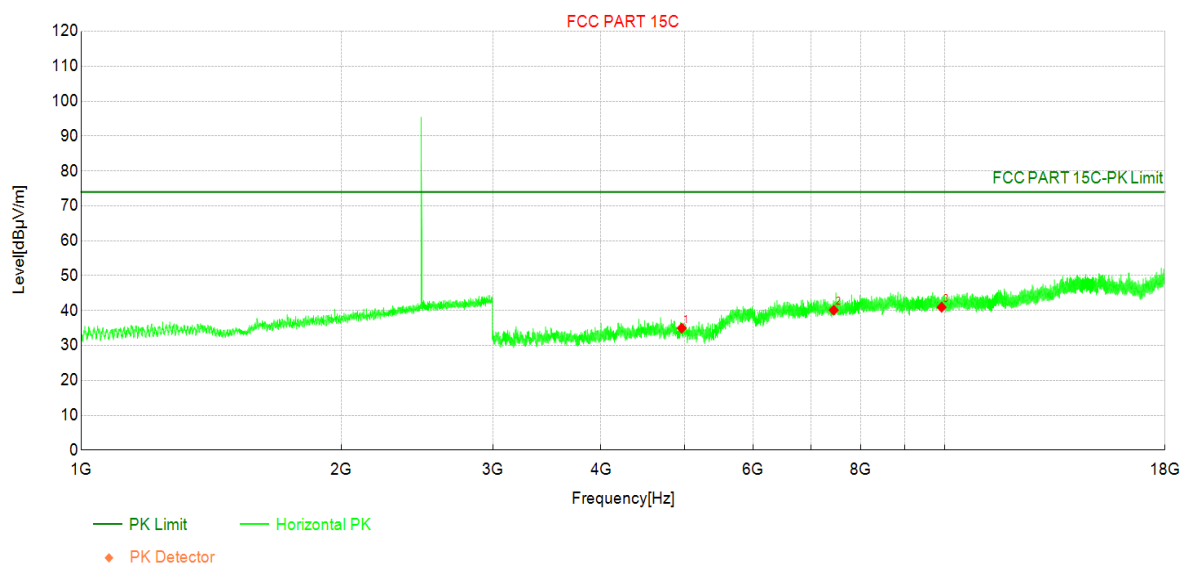

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4960	40.23	34.96	-5.27	74	39.04	PK	Horizontal	PASS
	4960	-	10.2	-	54	43.8	AV	Horizontal	PASS
2	7440	37.54	40.1	2.56	74	33.9	PK	Horizontal	PASS
	7440	-	15.34	-	54	38.66	AV	Horizontal	PASS
3	9920	35.33	40.95	5.62	74	33.05	PK	Horizontal	PASS
	9920	-	16.19	-	54	37.81	AV	Horizontal	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode2:Transmit at 2480MHz by 2DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25℃ ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

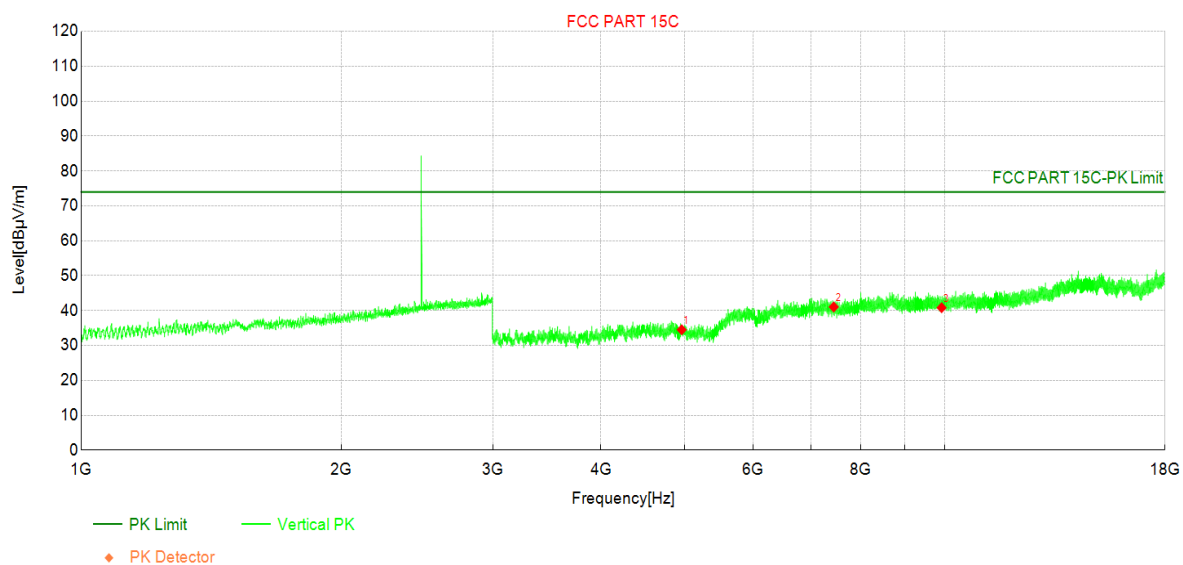

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4960	39.77	34.5	-5.27	74	39.5	PK	Vertical	PASS
	4960	-	9.74	-	54	44.26	AV	Vertical	PASS
2	7440	38.47	41.03	2.56	74	32.97	PK	Vertical	PASS
	7440	-	16.27	-	54	37.73	AV	Vertical	PASS
3	9920	35.2	40.82	5.62	74	33.18	PK	Vertical	PASS
	9920	-	16.06	-	54	37.94	AV	Vertical	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 2402MHz by 3DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25℃ ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

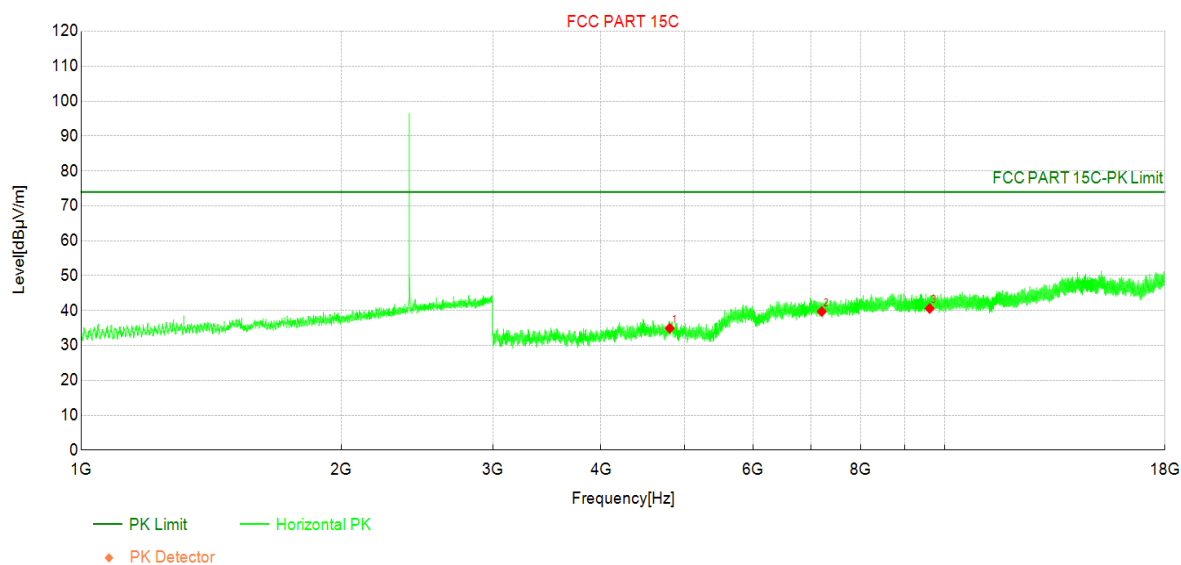

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4804	40.94	34.91	-6.03	74	39.09	PK	Horizontal	PASS
	4804	-	10.15	-	54	43.85	AV	Horizontal	PASS
2	7206	36.74	39.71	2.97	74	34.29	PK	Horizontal	PASS
	7206	-	14.95	-	54	39.05	AV	Horizontal	PASS
3	9608	34.66	40.6	5.94	74	33.4	PK	Horizontal	PASS
	9608	-	15.84	-	54	38.16	AV	Horizontal	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 2402MHz by 3DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

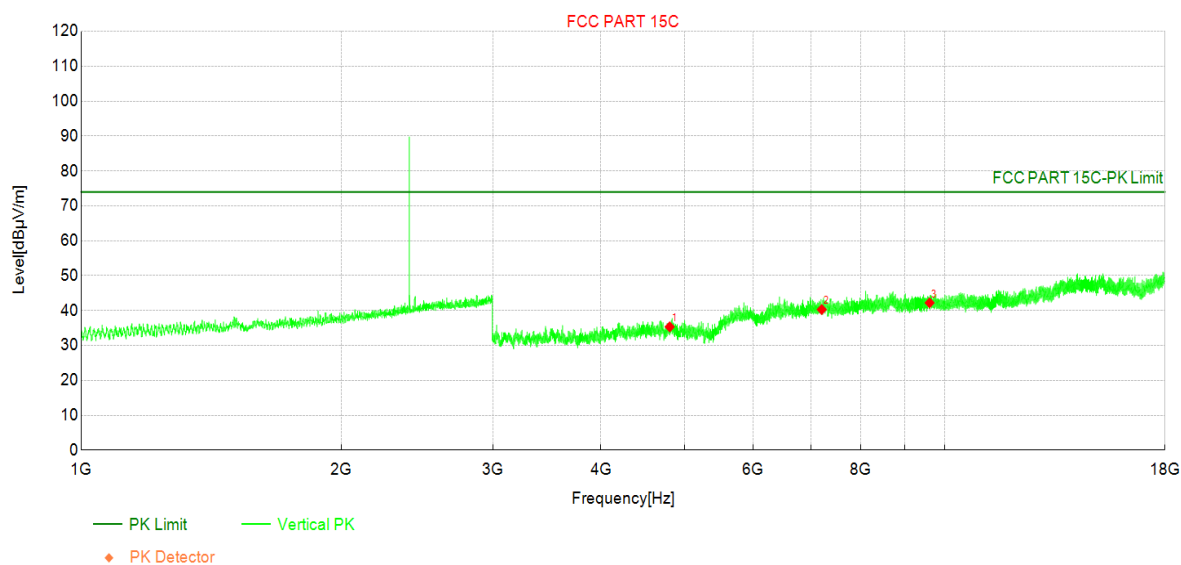

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4804	41.36	35.33	-6.03	74	38.67	PK	Vertical	PASS
	4804	-	10.57	-	54	43.43	AV	Vertical	PASS
2	7206	37.32	40.29	2.97	74	33.71	PK	Vertical	PASS
	7206	-	15.53	-	54	38.47	AV	Vertical	PASS
3	9608	36.28	42.22	5.94	74	31.78	PK	Vertical	PASS
	9608	-	17.46	-	54	36.54	AV	Vertical	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 2441MHz by 3DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

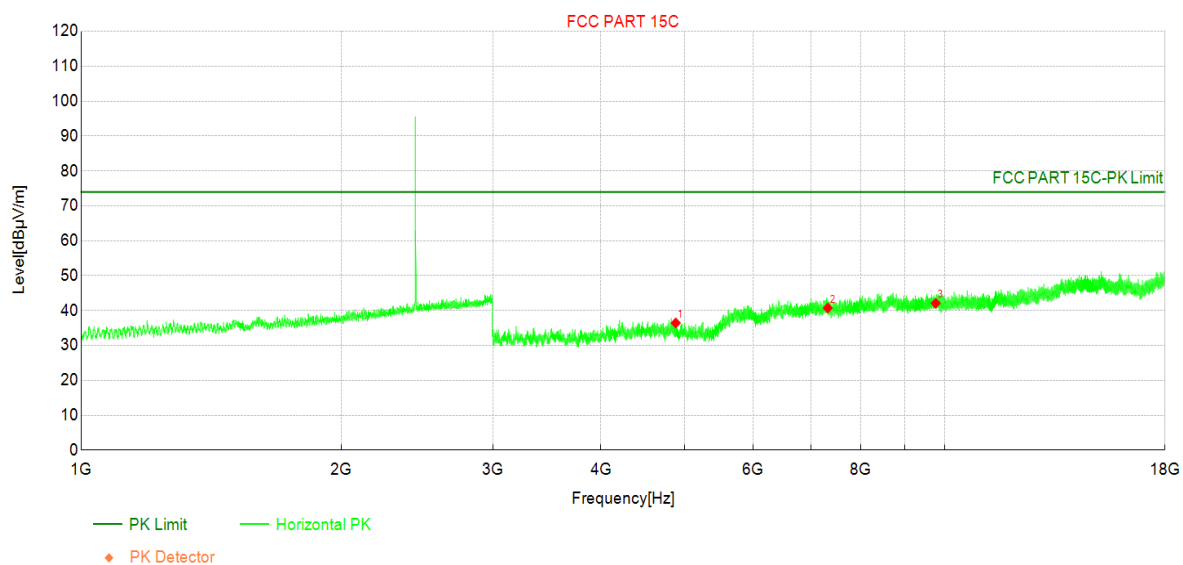

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4882	42.53	36.45	-6.08	74	37.55	PK	Horizontal	PASS
	4882	-	11.69	-	54	42.31	AV	Horizontal	PASS
2	7323	37.95	40.73	2.78	74	33.27	PK	Horizontal	PASS
	7323	-	15.97	-	54	38.03	AV	Horizontal	PASS
3	9764	35.97	42.09	6.12	74	31.91	PK	Horizontal	PASS
	9764	-	17.33	-	54	36.67	AV	Horizontal	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 2441MHz by 3DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

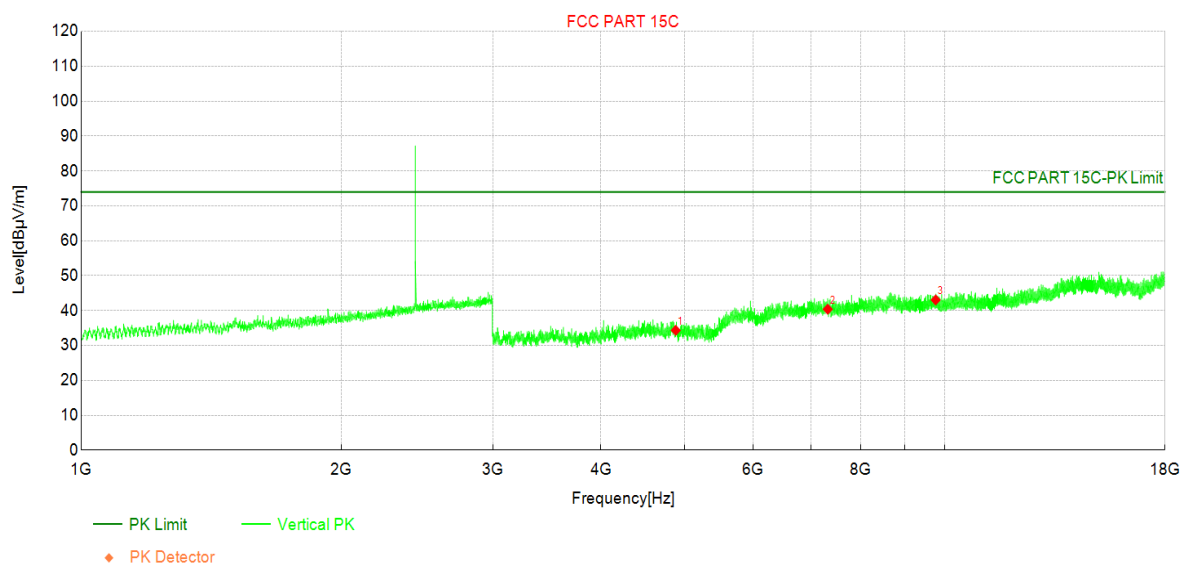

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4882	40.41	34.33	-6.08	74	39.67	PK	Vertical	PASS
	4882	-	9.57	-	54	44.43	AV	Vertical	PASS
2	7323	37.61	40.39	2.78	74	33.61	PK	Vertical	PASS
	7323	-	15.63	-	54	38.37	AV	Vertical	PASS
3	9764	36.92	43.04	6.12	74	30.96	PK	Vertical	PASS
	9764	-	18.28	-	54	35.72	AV	Vertical	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 2480MHz by 3DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25℃ ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

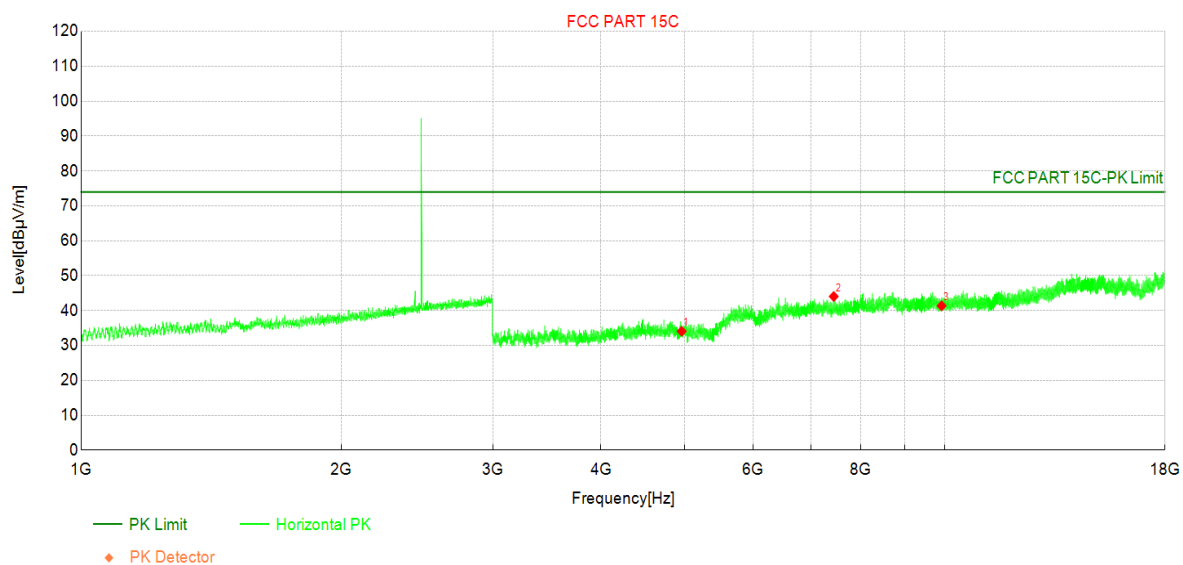

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4960	39.33	34.06	-5.27	74	39.94	PK	Horizontal	PASS
	4960	-	9.3	-	54	44.7	AV	Horizontal	PASS
2	7440	41.47	44.03	2.56	74	29.97	PK	Horizontal	PASS
	7440	-	19.27	-	54	34.73	AV	Horizontal	PASS
3	9920	35.74	41.36	5.62	74	32.64	PK	Horizontal	PASS
	9920	-	16.6	-	54	37.4	AV	Horizontal	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 2480MHz by 3DH5	Voltage:	3.3 Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15C		

Test Graph

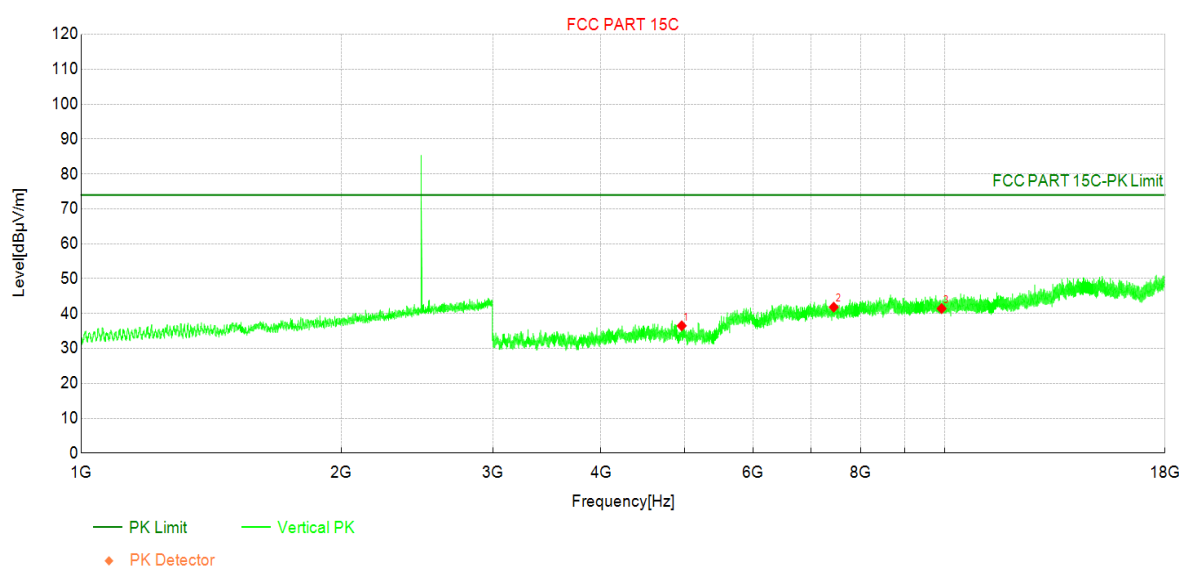

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4960	41.76	36.49	-5.27	74	37.51	PK	Vertical	PASS
	4960	-	11.73	-	54	42.27	AV	Vertical	PASS
2	7440	39.28	41.84	2.56	74	32.16	PK	Vertical	PASS
	7440	-	17.08	-	54	36.92	AV	Vertical	PASS
3	9920	35.8	41.42	5.62	74	32.58	PK	Vertical	PASS
	9920	-	16.66	-	54	37.34	AV	Vertical	PASS

Note:

1. Level=Reading+Factor


2. Margin=Limit-Level, AV Level = PK Level + Duty Cycle Factor.

3. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.

4. The test frequency range, 18GHz~26GHz test result on peak is lower than average limit, all is the noise base, therefore no data appear in the report.


The worst case of Radiated Emission below 1GHz :

Profile: 2510795R	Page No.: 1
Engineer: Yuliu	
Site: AC2	Time: 2025/04/06 - 22:28
Limit: FCC Part 15.209	Margin: 0
Probe: CBL6112B_2933(30-1000MHz)	Polarity: Horizontal
EUT: IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2	Power: 3.3 Vdc
Note: Mode1:Transmit at 2402MHz by DH5	

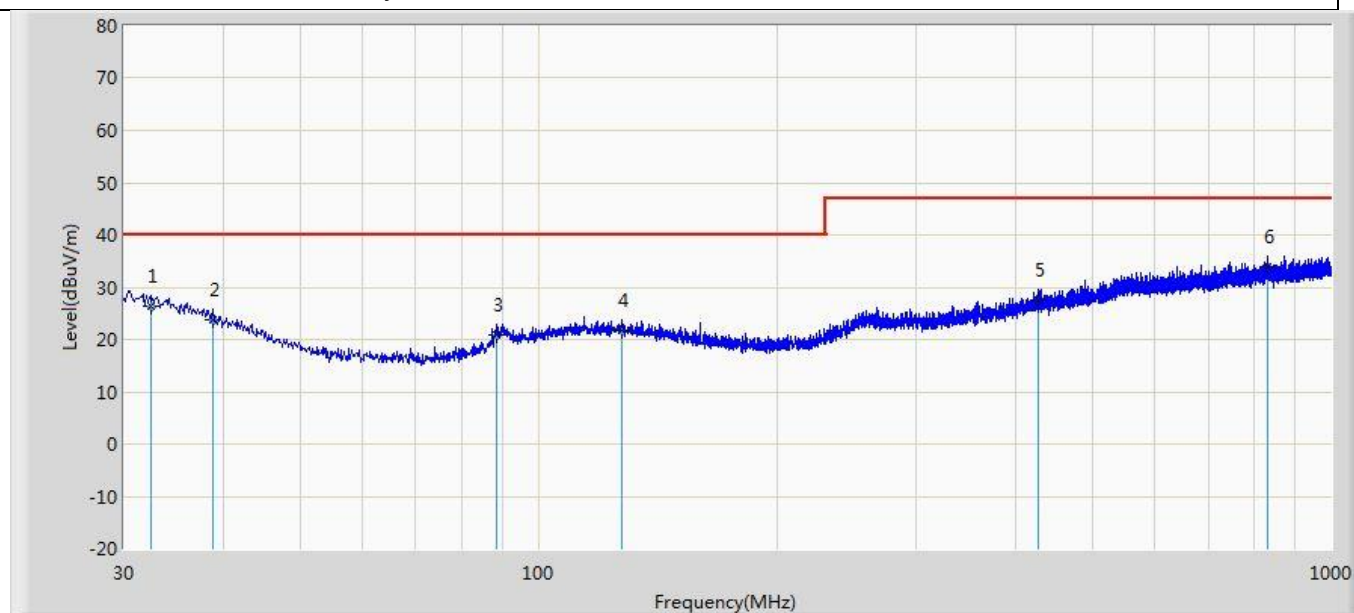

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		32.425	26.316	2.253	-13.684	40.000	24.064	QP
2		38.851	23.688	3.058	-16.312	40.000	20.631	QP
3		88.685	20.819	5.022	-19.181	40.000	15.798	QP
4		127.485	21.692	2.694	-18.308	40.000	18.998	QP
5		426.366	27.502	2.962	-19.498	47.000	24.539	QP
6	*	830.250	33.803	3.966	-13.197	47.000	29.837	QP

Profile: 2510795R	Page No.: 2
Engineer: Yuliu	
Site: AC2	Time: 2025/04/06 - 22:29
Limit: FCC Part 15.209	Margin: 0
Probe: CBL6112B_2933(30-1000MHz)	Polarity: Vertical
EUT: IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2	Power: 3.3 Vdc
Note: Mode1:Transmit at 2402MHz by DH5	

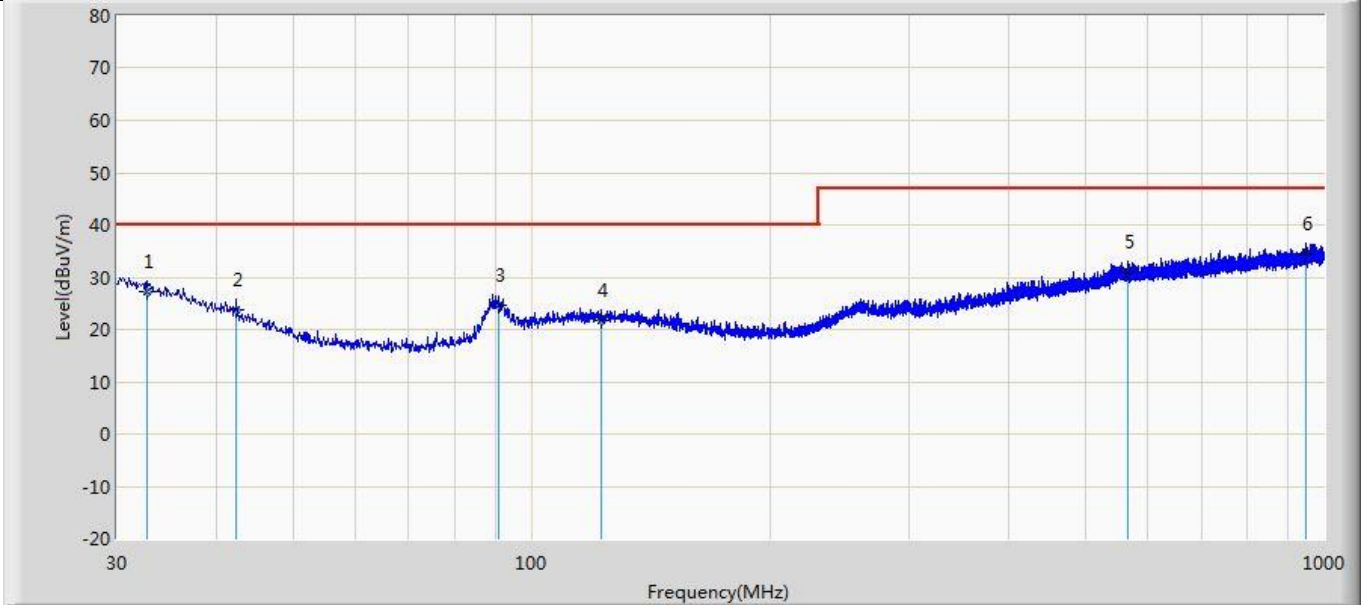

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		32.789	27.276	3.381	-12.724	40.000	23.895	QP
2		42.489	23.742	5.061	-16.258	40.000	18.680	QP
3		91.110	24.515	8.242	-15.485	40.000	16.273	QP
4		122.271	21.663	2.497	-18.337	40.000	19.166	QP
5		564.470	30.965	3.647	-16.035	47.000	27.318	QP
6	*	949.560	34.628	4.201	-12.372	47.000	30.427	QP

Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

_____ The End _____