



FCC CFR47 PART 15 SUBPART C

INDUSTRY CANADA RSS-210 ISSUE 8

CERTIFICATION TEST REPORT

FOR

3x3 MIMO BASE STATION

MODEL NUMBER: A1521

FCC ID: BCGA1470
IC: 579C-A1470

REPORT NUMBER: 12U14745-6, Revision A

ISSUE DATE: MAY 23, 2013

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014
U.S.A.

Prepared by
UL CCS
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP®

NVLAP LAB CODE 200065-0

Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|------------|---|------------|
| -- | 03/29/13 | Initial Issue Added output power sections for HT20 BF 2TX and 3TX in the 2.4 GHz band. | F. Ibrahim |
| A | 05/23/13 | Added output power sections for VHT80 BF 2TX and VHT80 BF 3TX in the 5.8 GHz band. Revised 8.1 and 8.2 | F. Ibrahim |

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. ATTESTATION OF TEST RESULTS | 7 |
| 2. TEST METHODOLOGY | 8 |
| 3. FACILITIES AND ACCREDITATION | 8 |
| 4. CALIBRATION AND UNCERTAINTY | 8 |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | <i>8</i> |
| 4.2. <i>SAMPLE CALCULATION</i> | <i>8</i> |
| 4.3. <i>MEASUREMENT UNCERTAINTY</i> | <i>8</i> |
| 5. EQUIPMENT UNDER TEST | 9 |
| 5.1. <i>DESCRIPTION OF EUT</i> | <i>9</i> |
| 5.2. <i>MAXIMUM OUTPUT POWER</i> | <i>10</i> |
| 5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> | <i>12</i> |
| 5.4. <i>SOFTWARE AND FIRMWARE</i> | <i>12</i> |
| 5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> | <i>13</i> |
| 5.6. <i>DESCRIPTION OF TEST SETUP</i> | <i>14</i> |
| 6. TEST AND MEASUREMENT EQUIPMENT | 16 |
| 7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS | 17 |
| 7.1. <i>ON TIME AND DUTY CYCLE RESULTS</i> | <i>17</i> |
| 7.2. <i>MEASUREMENT METHODS</i> | <i>17</i> |
| 7.3. <i>DUTY CYCLE PLOTS</i> | <i>18</i> |
| 8. ANTENNA PORT TEST RESULTS | 24 |
| 8.1. <i>802.11b 1TX MODE IN THE 2.4 GHz BAND</i> | <i>24</i> |
| 8.1.1. <i>AVERAGE POWER</i> | <i>24</i> |
| 8.2. <i>802.11b 2TX MODE IN THE 2.4 GHz BAND</i> | <i>25</i> |
| 8.2.1. <i>AVERAGE POWER</i> | <i>25</i> |
| 8.3. <i>802.11b 3TX MODE IN THE 2.4 GHz BAND</i> | <i>26</i> |
| 8.3.1. <i>6 dB BANDWIDTH</i> | <i>26</i> |
| 8.3.2. <i>99% BANDWIDTH</i> | <i>33</i> |
| 8.3.3. <i>OUTPUT AVERAGE POWER</i> | <i>40</i> |
| 8.3.4. <i>POWER SPECTRAL DENSITY</i> | <i>42</i> |
| 8.3.5. <i>OUT-OF-BAND EMISSIONS</i> | <i>48</i> |
| 8.4. <i>802.11g 1TX MODE IN THE 2.4 GHz BAND</i> | <i>61</i> |
| 8.4.1. <i>6 dB BANDWIDTH</i> | <i>61</i> |
| 8.4.2. <i>99% BANDWIDTH</i> | <i>64</i> |
| 8.4.3. <i>OUTPUT AVERAGE POWER</i> | <i>67</i> |
| 8.4.4. <i>POWER SPECTRAL DENSITY</i> | <i>69</i> |
| 8.4.5. <i>OUT-OF-BAND EMISSIONS</i> | <i>72</i> |

| | | |
|---------|---|-----|
| 8.5. | 802.11g 2TX MODE IN THE 2.4 GHz BAND | 77 |
| 8.6. | 802.11g 3TX MODE IN THE 2.4 GHz BAND | 77 |
| 8.7. | 802.11n HT20 1TX MODE IN THE 2.4 GHz BAND | 77 |
| 8.8. | 802.11n HT20 BF 2TX MODE IN THE 2.4 GHz BAND | 77 |
| 8.8.1. | OUTPUT AVERAGE POWER | 77 |
| 8.9. | 802.11n HT20 BF 3TX MODE IN THE 2.4 GHz BAND | 79 |
| 8.9.1. | OUTPUT AVERAGE POWER | 79 |
| 8.10. | 802.11n HT20 CDD 2TX MODE IN THE 2.4 GHz BAND | 81 |
| 8.10.1. | 6 dB BANDWIDTH | 81 |
| 8.10.2. | 99% BANDWIDTH | 85 |
| 8.10.3. | OUTPUT AVERAGE POWER | 89 |
| 8.10.4. | POWER SPECTRAL DENSITY | 91 |
| 8.10.5. | OUT-OF-BAND EMISSIONS | 95 |
| 8.11. | 802.11n HT20 CDD 3TX MODE IN THE 2.4 GHz BAND | 104 |
| 8.11.1. | 6 dB BANDWIDTH | 104 |
| 8.11.2. | 99% BANDWIDTH | 110 |
| 8.11.3. | OUTPUT AVERAGE POWER | 116 |
| 8.11.4. | POWER SPECTRAL DENSITY | 118 |
| 8.11.5. | OUT-OF-BAND EMISSIONS | 124 |
| 8.12. | 802.11a 1TX MODE IN THE 5.8 GHz BAND | 137 |
| 8.13. | 802.11a CDD 2TX MODE IN THE 5.8 GHz BAND | 137 |
| 8.14. | 802.11a CDD 3TX MODE IN THE 5.8 GHz BAND | 137 |
| 8.15. | 802.11n HT20 1TX MODE IN THE 5.8 GHz BAND | 137 |
| 8.16. | 802.11n HT20 CDD 2TX MODE IN THE 5.8 GHz BAND | 137 |
| 8.17. | 802.11n HT20 CDD 3TX MODE IN THE 5.8 GHz BAND | 138 |
| 8.17.1. | 6 dB BANDWIDTH | 138 |
| 8.17.2. | 99% BANDWIDTH | 144 |
| 8.17.3. | OUTPUT AVERAGE POWER | 150 |
| 8.17.4. | POWER SPECTRAL DENSITY | 152 |
| 8.17.5. | OUT-OF-BAND EMISSIONS | 158 |
| 8.18. | 802.11n HT40 1TX MODE IN THE 5.8 GHz BAND | 171 |
| 8.19. | 802.11n HT40 CDD 2TX MODE IN THE 5.8 GHz BAND | 171 |
| 8.20. | 802.11n HT40 CDD 3TX MODE IN THE 5.8 GHz BAND | 172 |
| 8.20.1. | 6 dB BANDWIDTH | 172 |
| 8.20.2. | 99% BANDWIDTH | 176 |
| 8.20.3. | OUTPUT AVERAGE POWER | 180 |
| 8.20.4. | POWER SPECTRAL DENSITY | 182 |
| 8.20.5. | OUT-OF-BAND EMISSIONS | 186 |
| 8.21. | 802.11ac VHT80 1TX MODE IN THE 5.8 GHz BAND | 193 |
| 8.22. | 802.11ac VHT80 CDD 2TX MODE IN THE 5.8 GHz BAND | 193 |
| 8.23. | 802.11ac VHT80 BF 2TX MODE IN THE 5.8 GHz BAND | 193 |
| 8.23.1. | OUTPUT AVERAGE POWER | 193 |
| 8.24. | 802.11ac VHT80 BF 3TX MODE IN THE 5.8 GHz BAND | 195 |
| 8.24.1. | OUTPUT AVERAGE POWER | 195 |

| | | |
|-----------|---|------------|
| 8.25. | <i>802.11ac VHT80 CDD 3TX MODE IN THE 5.8 GHz BAND (CH155)</i> | 197 |
| 8.25.1. | 6 dB BANDWIDTH | 197 |
| 8.25.2. | 99% BANDWIDTH | 200 |
| 8.25.3. | OUTPUT AVERAGE POWER | 203 |
| 8.25.4. | POWER SPECTRAL DENSITY | 205 |
| 8.25.5. | OUT-OF-BAND EMISSIONS | 208 |
| 8.26. | <i>802.11n HT20 BF 2TX MODE IN THE 5.8 GHz BAND</i> | 215 |
| 8.26.1. | OUTPUT AVERAGE POWER | 215 |
| 8.27. | <i>802.11n HT20 BF 3TX MODE IN THE 5.8 GHz BAND</i> | 216 |
| 8.27.1. | OUTPUT AVERAGE POWER | 216 |
| 8.28. | <i>802.11n HT40 BF 2TX MODE IN THE 5.8 GHz BAND</i> | 217 |
| 8.28.1. | OUTPUT AVERAGE POWER | 217 |
| 8.29. | <i>802.11n HT40 BF 3TX MODE IN THE 5.8 GHz BAND</i> | 218 |
| 8.29.1. | OUTPUT AVERAGE POWER | 218 |
| 9. | RADIATED TEST RESULTS | 219 |
| 9.1. | <i>LIMITS AND PROCEDURE</i> | 219 |
| 9.2. | <i>TX ABOVE 1 GHz 802.11b 1TX MODE IN THE 2.4 GHz BAND</i> | 220 |
| 9.3. | <i>TX ABOVE 1 GHz 802.11b CDD 2TX MODE IN THE 2.4 GHz BAND</i> | 230 |
| 9.4. | <i>TX ABOVE 1 GHz 802.11b CDD 3TX MODE IN THE 2.4 GHz BAND</i> | 240 |
| 9.5. | <i>TX ABOVE 1 GHz 802.11g 1TX MODE IN THE 2.4 GHz BAND</i> | 250 |
| 9.6. | <i>TX ABOVE 1 GHz 802.11g 2TX MODE IN THE 2.4 GHz BAND</i> | 260 |
| 9.7. | <i>TX ABOVE 1 GHz 802.11g 3TX MODE IN THE 2.4 GHz BAND</i> | 260 |
| 9.8. | <i>TX ABOVE 1 GHz 802.11n HT20 1TX MODE IN THE 2.4 GHz BAND</i> | 260 |
| 9.9. | <i>TX ABOVE 1 GHz 802.11n HT20 2TX MODE IN THE 2.4 GHz BAND</i> | 261 |
| 9.10. | <i>TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 2.4 GHz BAND</i> | 271 |
| 9.11. | <i>TX ABOVE 1 GHz 802.11n HT20 BF 2TX MODE IN THE 2.4 GHz BAND</i> | 281 |
| 9.12. | <i>TX ABOVE 1 GHz 802.11n HT20 BF 3TX MODE IN THE 2.4 GHz BAND</i> | 291 |
| 9.13. | <i>TX ABOVE 1 GHz 802.11a 1TX MODE IN THE 5.8 GHz BAND</i> | 301 |
| 9.14. | <i>TX ABOVE 1 GHz 802.11a 2TX MODE IN THE 5.8 GHz BAND</i> | 301 |
| 9.15. | <i>TX ABOVE 1 GHz 802.11a 3TX MODE IN THE 5.8 GHz BAND</i> | 301 |
| 9.16. | <i>TX ABOVE 1 GHz 802.11n HT20 1TX MODE IN THE 5.8 GHz BAND</i> | 301 |
| 9.17. | <i>TX ABOVE 1 GHz 802.11n HT20 2TX MODE IN THE 5.8 GHz BAND</i> | 301 |
| 9.18. | <i>TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 5.8 GHz BAND</i> | 302 |
| 9.19. | <i>TX ABOVE 1 GHz 802.11n BF 2TX MODE IN THE 5.8 GHz BAND</i> | 303 |
| 9.20. | <i>TX ABOVE 1 GHz 802.11n HT20 BF 3TX MODE IN THE 5.8 GHz BAND</i> | 304 |
| 9.21. | <i>TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.8 GHz BAND</i> | 305 |
| 9.22. | <i>TX ABOVE 1 GHz 802.11n HT40 2TX MODE IN THE 5.8 GHz BAND</i> | 305 |
| 9.23. | <i>TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.8 GHz BAND</i> | 306 |
| 9.24. | <i>TX ABOVE 1 GHz 802.11n HT40 BF 2TX MODE IN THE 5.8 GHz BAND</i> | 307 |

| | | |
|------------|---|------------|
| 9.25. | <i>TX ABOVE 1 GHz 802.11n HT40 BF 3TX MODE IN THE 5.8 GHz BAND</i> | 308 |
| 9.26. | <i>TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.8 GHz BAND</i> | 309 |
| 9.27. | <i>TX ABOVE 1 GHz 802.11ac VHT80 2TX MODE IN THE 5.8 GHz BAND</i> | 309 |
| 9.28. | <i>TX ABOVE 1 GHz 802.11ac VHT80 CDD 3TX MODE IN THE 5.8 GHz BAND</i> | 310 |
| 9.29. | <i>TX ABOVE 1 GHz 802.11ac VHT80 BF 2TX MODE IN THE 5.8 GHz BAND</i> | 311 |
| 9.30. | <i>TX ABOVE 1 GHz 802.11ac VHT80 BF 3TX MODE IN THE 5.8 GHz BAND</i> | 312 |
| 9.31. | <i>WORST-CASE BELOW 1 GHz (2.4 GHz BAND)</i> | 313 |
| 9.32. | <i>BAND WORST-CASE BELOW 1 GHz (5 GHz BANDS)</i> | 316 |
| 10. | AC POWER LINE CONDUCTED EMISSIONS | 319 |
| 11. | SETUP PHOTOS | 326 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: 3x3 MIMO BASE STATION

MODEL: A1521

SERIAL NUMBER: C86K500PFGCP, C86K5029FGCP

DATE TESTED: Dec 10, 2012 – Mar 26, 2013

| APPLICABLE STANDARDS | |
|---|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass |
| INDUSTRY CANADA RSS-210 Issue 8 Annex 8 | Pass |
| INDUSTRY CANADA RSS-GEN Issue 3 | Pass |

UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



FRANK IBRAHIM
WISE PROJECT LEAD
UL CCS

Tested By:



TOM CHEN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2003, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB |
| Radiated Disturbance, 30 to 1000 MHz | 4.94 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g/n/ac 3X3 MIMO Base Station. Transmit beam forming is supported on 802.11n/ac.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

| 2400 - 2483.5 MHz Authorized Frequency Band | | | | | | |
|---|--------------------|--------------------------|--------------------------|--------------------------|-----------------------|----------------------|
| Frequency Range (MHz) | Mode | Avg Power, Chain 0 (dBm) | Avg Power, Chain 1 (dBm) | Avg Power, Chain 2 (dBm) | Total Avg power (dBm) | Total Avg power (mW) |
| 2412 - 2462 | 802.11b Legacy 1TX | N/A | 24.00 | N/A | 24.00 | 251.19 |
| 2412 - 2462 | 802.11b CDD 2TX | 21.90 | 22.20 | N/A | 25.06 | 320.63 |
| 2412 - 2462 | 802.11b CDD 3TX | 20.99 | 21.45 | 21.21 | 25.99 | 397.19 |
| 2412 - 2462 | 802.11g Legacy 1TX | N/A | 23 | N/A | 23.00 | 199.53 |
| 2412 - 2462 | 802.11n HT20 2TX | 23.20 | 23.00 | N/A | 26.11 | 408.32 |
| 2412 - 2462 | 802.11n HT20 3TX | 21.90 | 22.50 | 22.30 | 27.01 | 502.34 |

| 5725 - 5850 MHz Authorized Frequency Band | | | | | | |
|---|---------------------|--------------------------|--------------------------|--------------------------|-----------------------|----------------------|
| Frequency Range (MHz) | Mode | Avg Power, Chain 0 (dBm) | Avg Power, Chain 1 (dBm) | Avg Power, Chain 2 (dBm) | Total Avg power (dBm) | Total Avg power (mW) |
| 5745 - 5825 | 802.11n HT20 3TX | 24.80 | 25.20 | 24.90 | 29.74 | 941.89 |
| 5745 - 5825 | 802.11n HT20 BF 2TX | 24.80 | 25.20 | N/A | 28.01 | 632.41 |
| 5745 - 5825 | 802.11n HT20 BF 3TX | 22.15 | 22.70 | 22.30 | 27.16 | 520.00 |
| 5755 - 5795 | 802.11n HT40 3TX | 24.30 | 24.50 | 24.40 | 29.17 | 826.04 |
| 5755 - 5795 | 802.11n HT40 BF 2TX | 24.30 | 24.60 | N/A | 27.46 | 557.19 |
| 5755 - 5795 | 802.11n HT40 BF 3TX | 22.10 | 22.50 | 22.30 | 27.07 | 509.33 |
| 5775 | 802.11ac VHT80 3TX | 21.00 | 21.30 | 21.10 | 25.91 | 389.94 |

Modes covering other modes in the 2.4 GHz band

- 2412-2462: 802.11HT20 1TX: Covered by worst case 802.11g Legacy 1TX testing
- 2412-2462: 802.11HT20 BF 2TX: Covered by worst case 802.11n HT20 2TX testing
- 2412-2462: 802.11AC20 2TX: Covered by worst case 802.11n HT20 2TX testing
- 2412-2462: 802.11AC20 BF 2TX: Covered by worst case 802.11n HT20 2TX testing
- 2412-2462: 802.11HT20 BF 3TX: Covered by worst case 802.11n HT20 3TX testing
- 2412-2462: 802.11AC20 3TX: Covered by worst case 802.11n HT20 3TX testing
- 2412-2462: 802.11AC20 BF 3TX: Covered by worst case 802.11n HT20 3TX testing

Modes covering other modes in the 5 GHz bands

5745-5825: 802.11a Legacy 1TX: Covered by worst case 802.11n HT20 CDD 3TX Mode testing
5745-5825: 802.11a CDD 2TX: Covered by worst case 802.11n HT20 CDD 3TX Mode testing
5745-5825: 802.11a CDD 3TX: Covered by worst case 802.11n HT20 CDD 3TX Mode testing
5745-5825: 802.11HT20 1TX: Covered by worst case 802.11n HT20 CDD 3TX Mode testing
5745-5825: 802.11HT20 2TX: Covered by worst case 802.11n HT20 CDD 3TX Mode testing
5745-5825: 802.11AC20 2TX: Covered by worst case 802.11n HT20 CDD 3TX Mode testing
5745-5825: 802.11AC20 3TX: Covered by worst case 802.11n HT20 CDD 3TX Mode testing
5745-5825: 802.11AC20 BF 2TX: Covered by worst case 802.11n HT20 BF 2TX Mode testing
5745-5825: 802.11AC20 BF 3TX: Covered by worst case 802.11n HT20 BF 3TX Mode testing
5755-5795: 802.11HT40 1TX: Covered by worst case 802.11n HT40 CDD 3TX Mode testing
5755-5795: 802.11HT40 2TX: Covered by worst case 802.11n HT40 CDD 3TX Mode testing
5755-5795: 802.11AC40 2TX: Covered by worst case 802.11n HT40 CDD 3TX Mode testing
5755-5795: 802.11AC40 3TX: Covered by worst case 802.11n HT40 CDD 3TX Mode testing
5755-5795: 802.11AC40 BF 2TX: Covered by worst case 802.11n HT40 BF 2TX Mode testing
5755-5795: 802.11AC40 BF 3TX: Covered by worst case 802.11n HT40 BF 3TX Mode testing
5775: 802.11ac VHT80 1TX: Covered by worst case 802.11ac VHT80 3TX Mode testing
5775: 802.11ac VHT80 2TX: Covered by worst case 802.11ac VHT80 3TX Mode testing
5775: 802.11ac VHT80 BF 2TX: Covered by worst case 802.11ac VHT80 3TX Mode testing
5775: 802.11ac VHT80 BF 3TX: Covered by worst case 802.11ac VHT80 3TX Mode testing

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

| Band (GHz) | Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Uncorrelated Chains Directional Gain (dBi) |
|---------------|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 2.4 | 3.00 | 3.00 | 3.10 | 3.03 |
| 5.2 | 3.20 | 1.40 | 2.20 | 2.33 |
| 5.3 | 3.40 | 1.60 | 2.30 | 2.50 |
| 5.6 | 3.00 | 1.70 | 3.80 | 2.92 |
| 5.8 | 2.70 | 1.90 | 4.40 | 3.13 |

| Band (GHz) | Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|---------------|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 2.4 | 3.00 | 3.00 | 3.10 | 7.80 |
| 5.2 | 3.20 | 1.40 | 2.20 | 7.07 |
| 5.3 | 3.40 | 1.60 | 2.30 | 7.24 |
| 5.6 | 3.00 | 1.70 | 3.80 | 7.65 |
| 5.8 | 2.70 | 1.90 | 4.40 | 7.83 |

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 6.10.56.166.

5.5. WORST-CASE CONFIGURATION AND MODE

The fundamental emission of the EUT was investigated in three orthogonal orientations; X, Y and Z. It was determined that Y orientation is worst-case; therefore, all final radiated emissions testing was performed with the EUT in Y orientation.

The EUT was a 3x3 MIMO Base Station connected to a host Laptop PC.

Worst-Case data rates, as provided by the client, were as follows:

For 2.4 GHz Band:

802.11b: 1 Mb/s.
802.11g: 6 Mb/s.
802.11n 20MHz: MCS0.

For 5.8 GHz Band:

802.11a: 6 Mb/s.
802.11n 20MHz: MCS0.
802.11n 40MHz: MCS0.
802.11ac VHT80: MCS0.

Worst-case mode and channel used for 30-1000 MHz radiated and power line conducted emissions was the mode and channel with the highest output power.

Radiated Band Edge measurement has been performed on additional channels CH2 to CH4 and CH8 to CH10 and has been verified to meet the requirements.

For the modes where CH2, CH3 and CH9, CH10 were tested for output power, all other test items at CH1 and CH11 were performed with the higher power level among CH1, CH2 and CH3 and among CH9, CH10 and CH11 as worst-case scenario.

For all modes with single chain, chain 1 was selected per the software provided by the client. Based on the client a preliminary investigation was performed on the three chains and chain 1 was found to be worst-case.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT


| Support Equipment List | | | | |
|------------------------------|--------------|--------------|---------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Laptop PC | Apple | MacBook M42A | PT358811 | DoC |
| Direct Plug-In AC-DC Adapter | Apple | PA-1850 | N/A | N/A |
| Mouse | HP | MOE2UO | CNP10300BB | Doc |

I/O CABLES

| I/O Cable List | | | | | | |
|----------------|----------|----------------------|----------------|--------------|------------------|---------|
| Cable No | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1 | AC | 1 | 2P | Non-shielded | 1.8 | |
| 2 | Ethernet | 1 | Ethernet | Non-shielded | 3 | |
| 3 | DC | 1 | DC | Non-shielded | 1.75 | |
| 4 | USB | 1 | USB | Non-shielded | 0.6 | |

TEST SETUP

The EUT is powered by AC source only during test. Test software exercised the radio card.

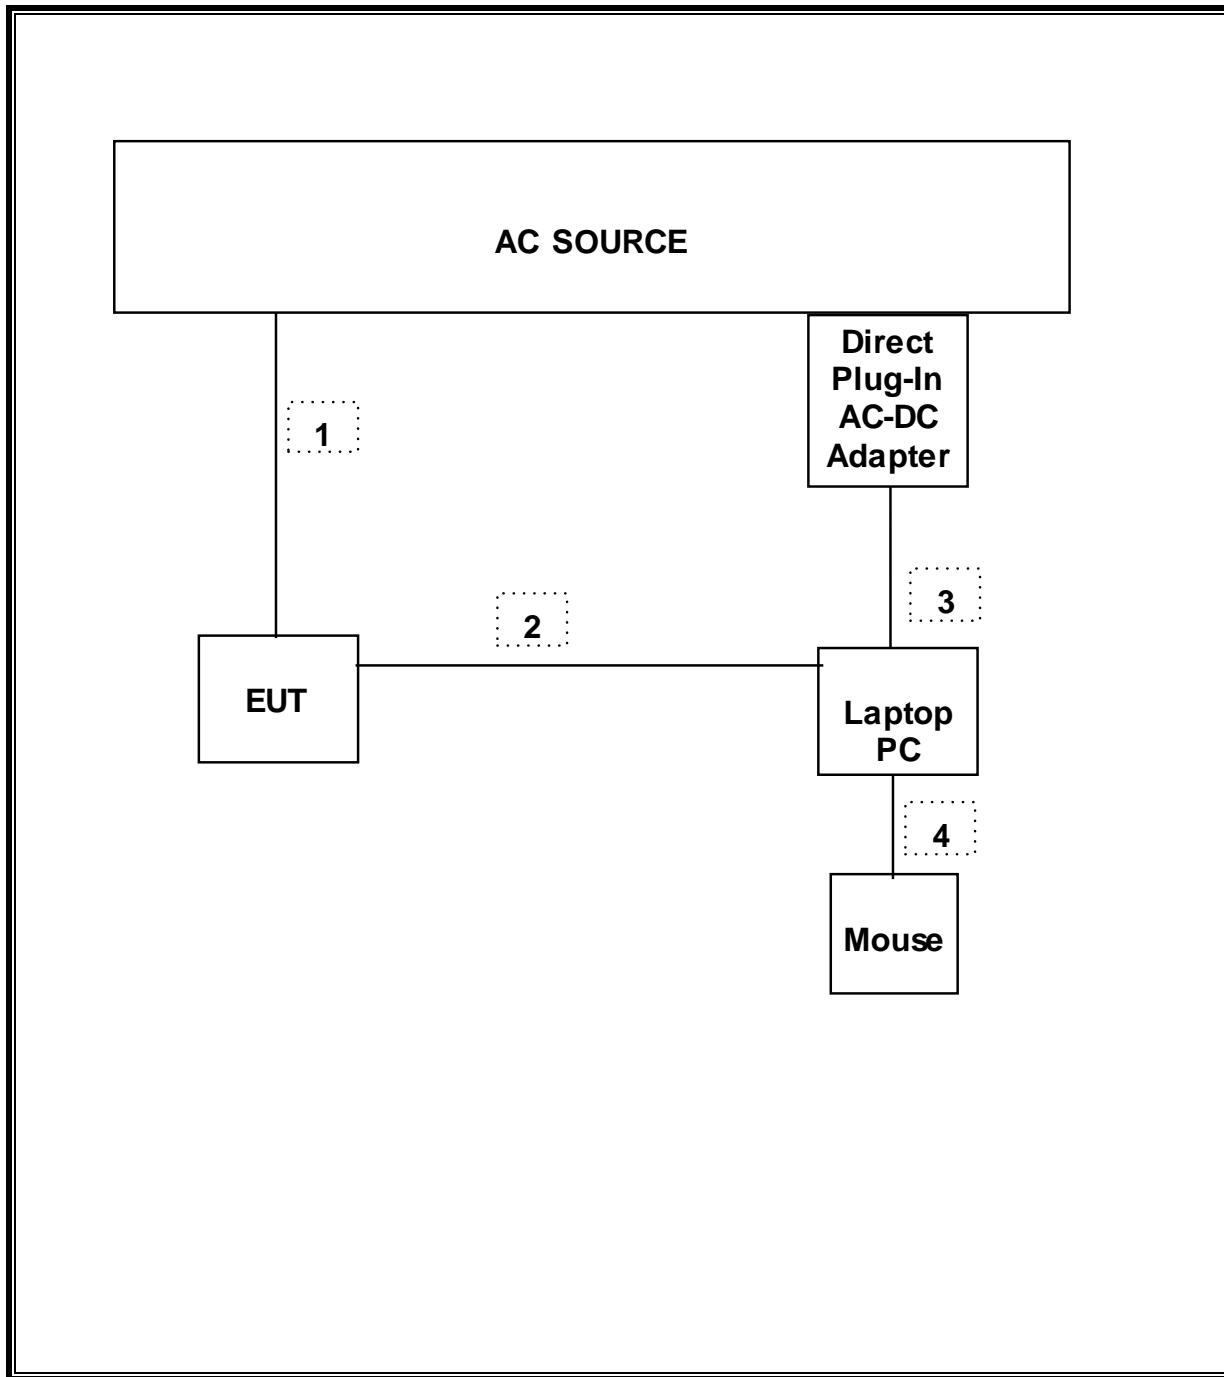SETUP DIAGRAM FOR TESTS

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List | | | | | |
|-------------------------------------|----------------|-------------|---------|----------|----------|
| Description | Manufacturer | Model | Asset | Cal Date | Cal Due |
| Spectrum Analyzer, 26.5 GHz | Agilent / HP | E4440A | C01179 | 02/16/12 | 02/26/14 |
| Spectrum Analyzer, 44 GHz | Agilent / HP | E4446A | C01012 | 10/21/12 | 10/21/13 |
| EMI Test Receiver, 9 kHz-7 GHz | R & S | ESCI 7 | 1000741 | 08/08/12 | 08/08/13 |
| EMI Test Receiver, 9 kHz-7 GHz | R & S | ESCI 7 | N/A | 08/21/12 | 08/21/13 |
| EMI Test Receiver, 30 MHz | R & S | ESHS 20 | N02396 | 08/08/12 | 08/08/13 |
| Antenna, Horn, 18 GHz | EMCO | 3115 | C00945 | 11/12/12 | 11/12/13 |
| Antenna, Horn, 26.5 GHz | ARA | MWH-1826/B | C00980 | 11/14/12 | 11/14/13 |
| Antenna, Horn, 40 GHz | ARA | MWH-2640/B | C00981 | 06/14/11 | 06/14/13 |
| Antenna, Bilog, 30MHz-1 GHz | Sunol Sciences | JB1 | N/A | 02/07/12 | 03/06/14 |
| Preamplifier, 26.5 GHz | Agilent / HP | 8449B | C00749 | 10/19/12 | 10/19/13 |
| Preamplifier, 26.5 GHz | Agilent / HP | 8449B | C01052 | 10/22/12 | 10/22/13 |
| Preamplifier, 40 GHz | Miteq | NSP4000-SP2 | C00990 | 08/02/11 | 08/02/13 |
| Preamplifier, 1300 MHz | Agilent / HP | 8447D | C00885 | 12/20/11 | 12/30/13 |
| P-Series single channel Power Meter | Agilent / HP | N1911A | N/A | 07/27/12 | 07/27/13 |
| Peak / Average Power Sensor | Agilent / HP | E9323A | N/A | 07/26/12 | 07/26/13 |
| LISN, 30 MHz | FCC | 50/250-25-2 | C00626 | 12/13/11 | 01/13/14 |

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 558074 D01 v02; Zero-Span Spectrum Analyzer Method.

7.1. ON TIME AND DUTY CYCLE RESULTS

| Mode | ON Time B (msec) | Period (msec) | Duty Cycle x (linear) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) |
|---------------------|---------------------|------------------|--------------------------|-------------------|--------------------------------------|
| 802.11b | 2.4600 | 2.4900 | 0.988 | 98.8% | 0.00 |
| 802.11g | 2.0500 | 2.0900 | 0.981 | 98.1% | 0.00 |
| 802.11a 20 MHz | 2.0550 | 2.0900 | 0.983 | 98.3% | 0.00 |
| 802.11n HT20 CDD | 1.9110 | 1.9500 | 0.980 | 98.0% | 0.00 |
| 802.11n HT20 STBC | 1.9250 | 1.9450 | 0.990 | 99.0% | 0.00 |
| 802.11n HT40 SISO | 0.9424 | 0.9601 | 0.982 | 98.2% | 0.00 |
| 802.11n HT40 CDD | 0.9449 | 0.9627 | 0.982 | 98.2% | 0.00 |
| 802.11n HT40 STBC | 0.9520 | 0.9707 | 0.981 | 98.1% | 0.00 |
| 802.11ac VHT80 SISO | 0.6000 | 0.6133 | 0.978 | 97.8% | 0.10 |
| 802.11ac VHT80 CDD | 0.5953 | 0.6080 | 0.979 | 97.9% | 0.09 |
| 802.11ac VHT80 STBC | 0.5979 | 0.6105 | 0.979 | 97.9% | 0.09 |

7.2. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v02, Section 7.0.



Output Power: KDB 558074 D01 v02, Sections 8.2.3 and 8.2.4.



Power Spectral Density: KDB 558074 D01 v02, Sections 9.2 and 9.4.



Out-of-band emissions in non-restricted bands: KDB 558074 D01 v02, Sections 10.1.



Out-of-band emissions in restricted bands: KDB 558074 D01 v02, Sections 10.2.1.



7.3. DUTY CYCLE PLOTS

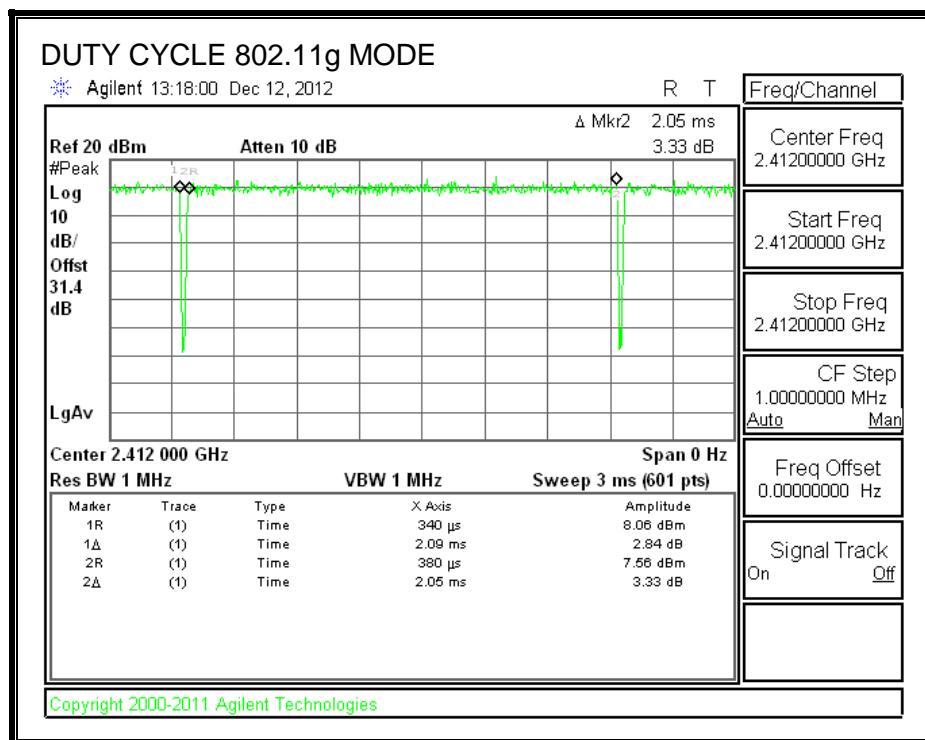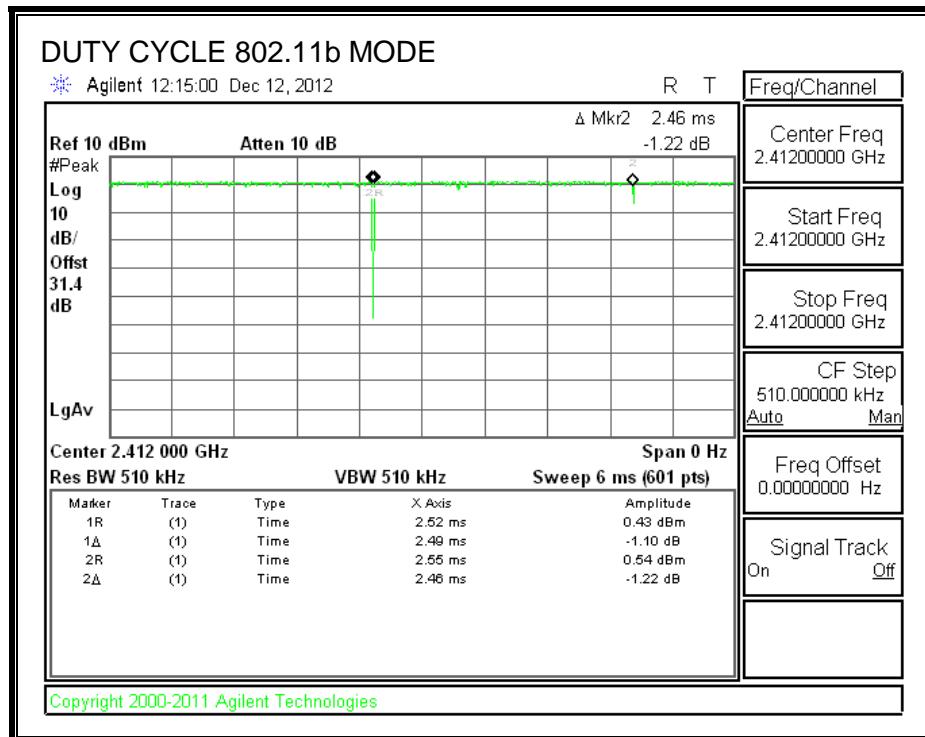


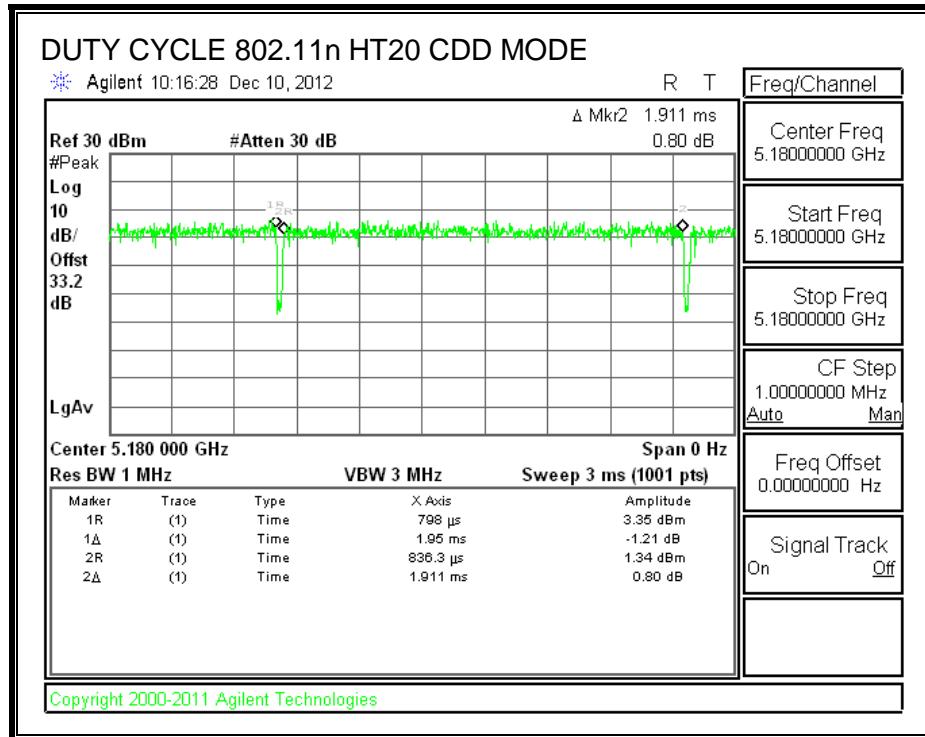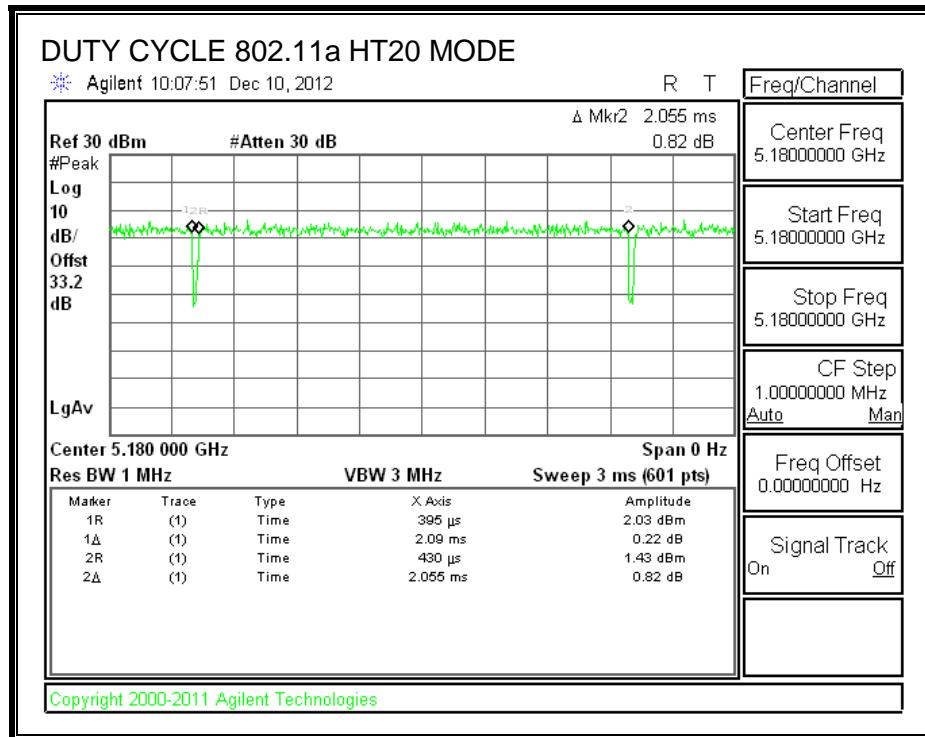

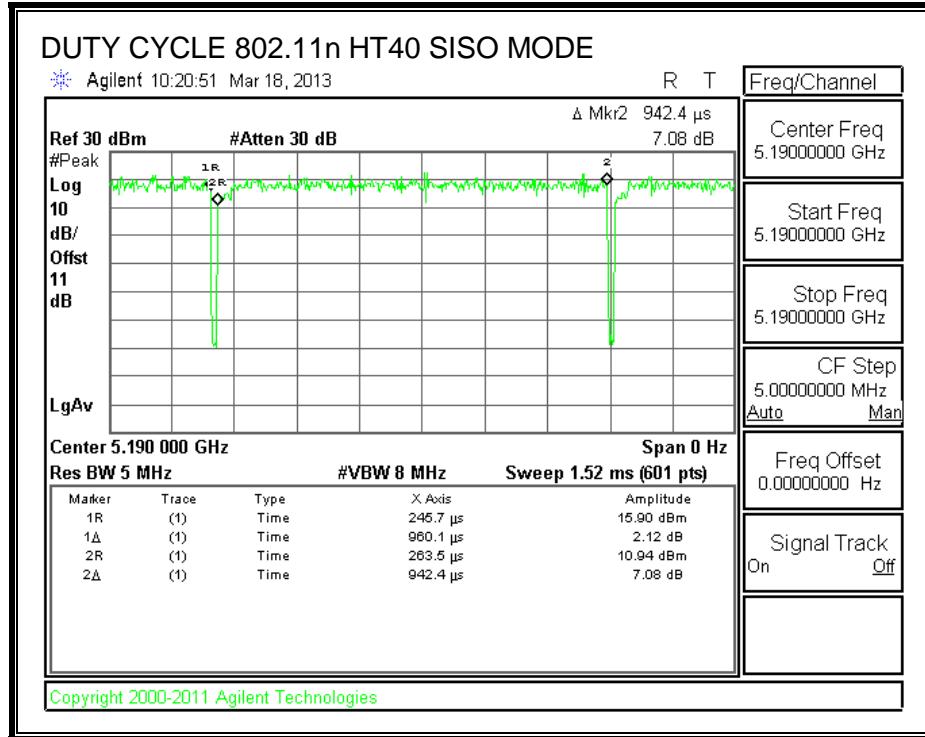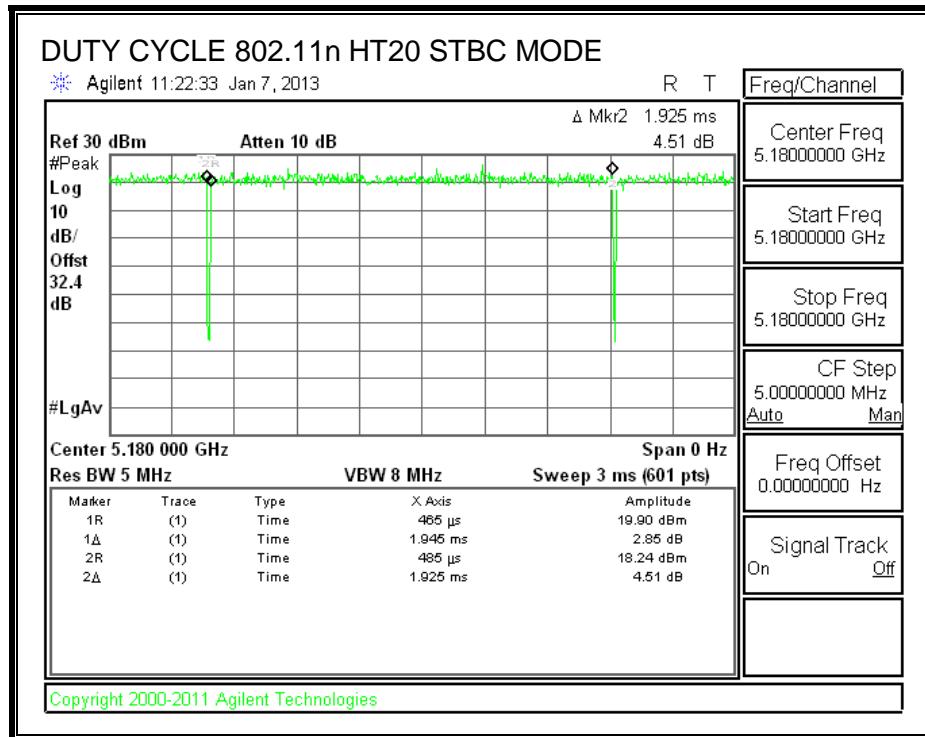

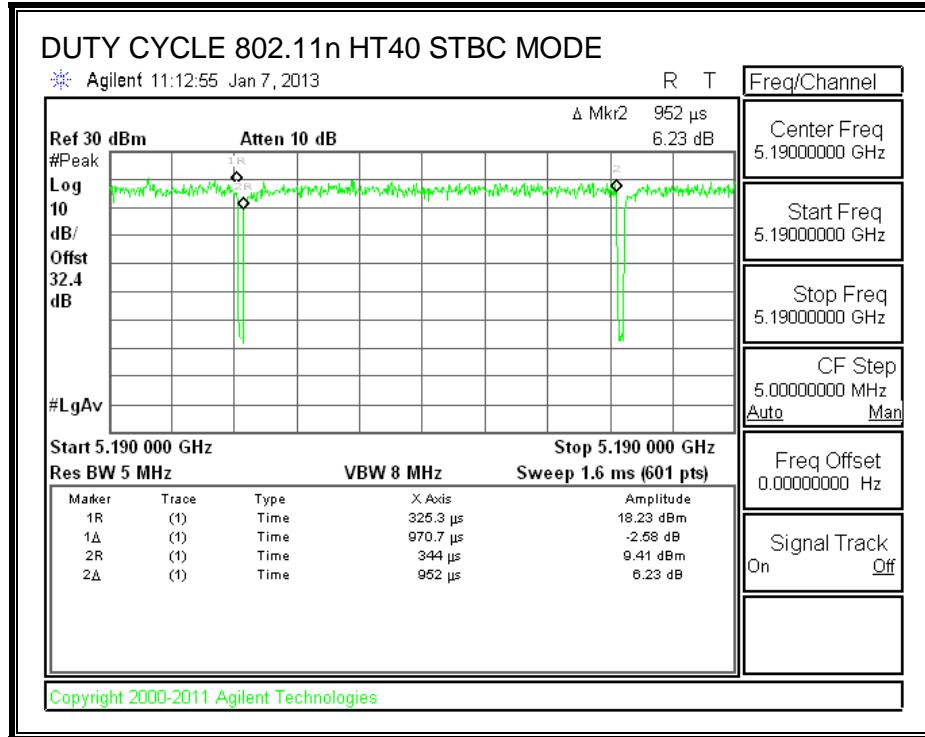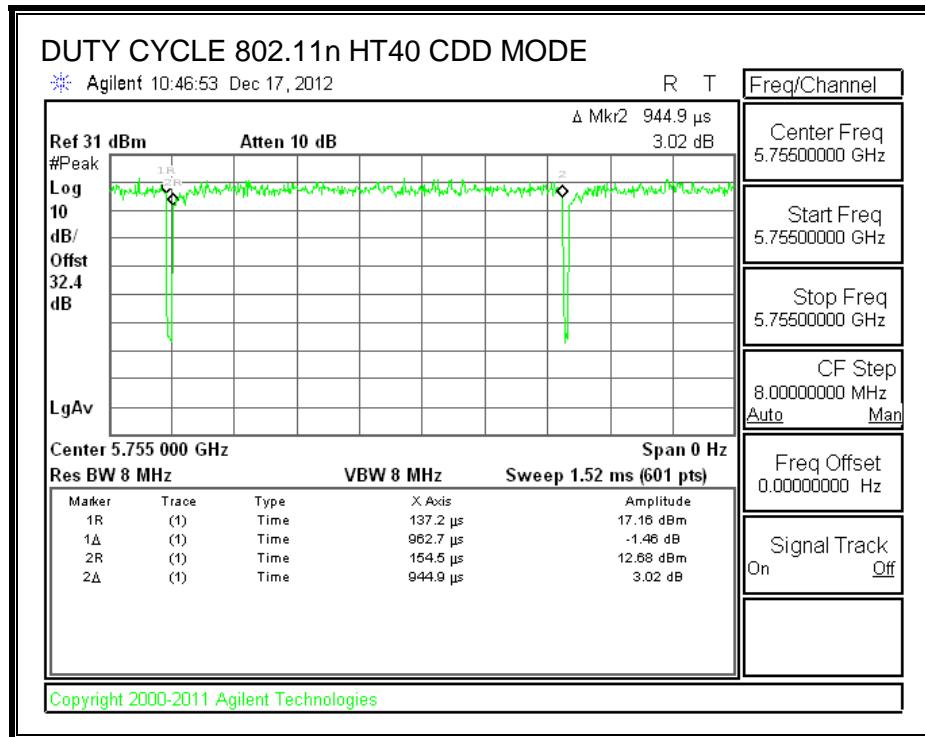

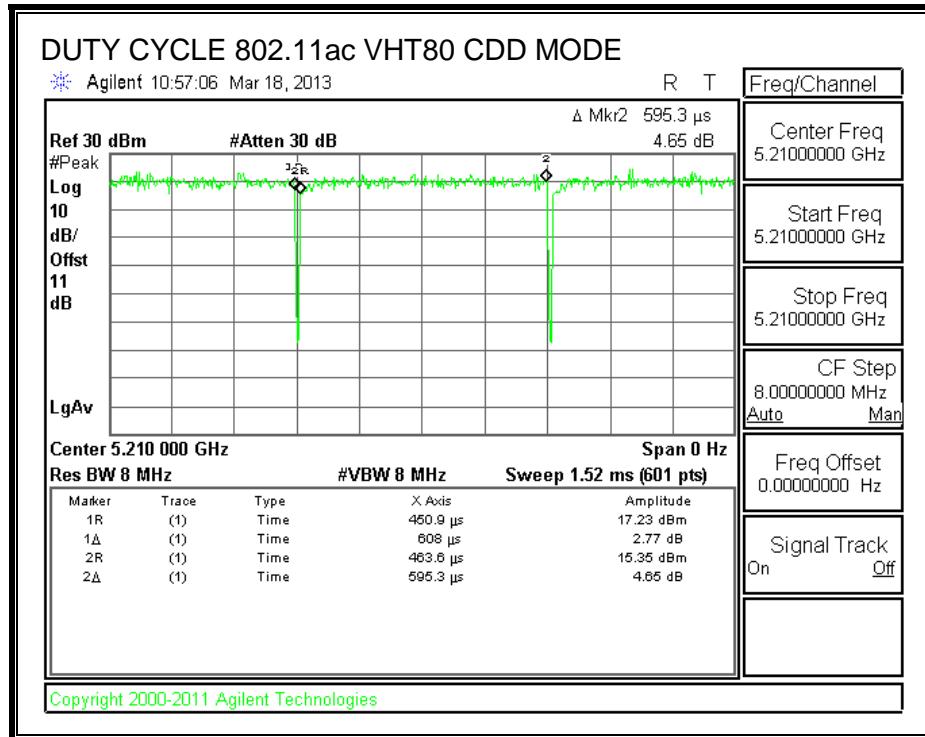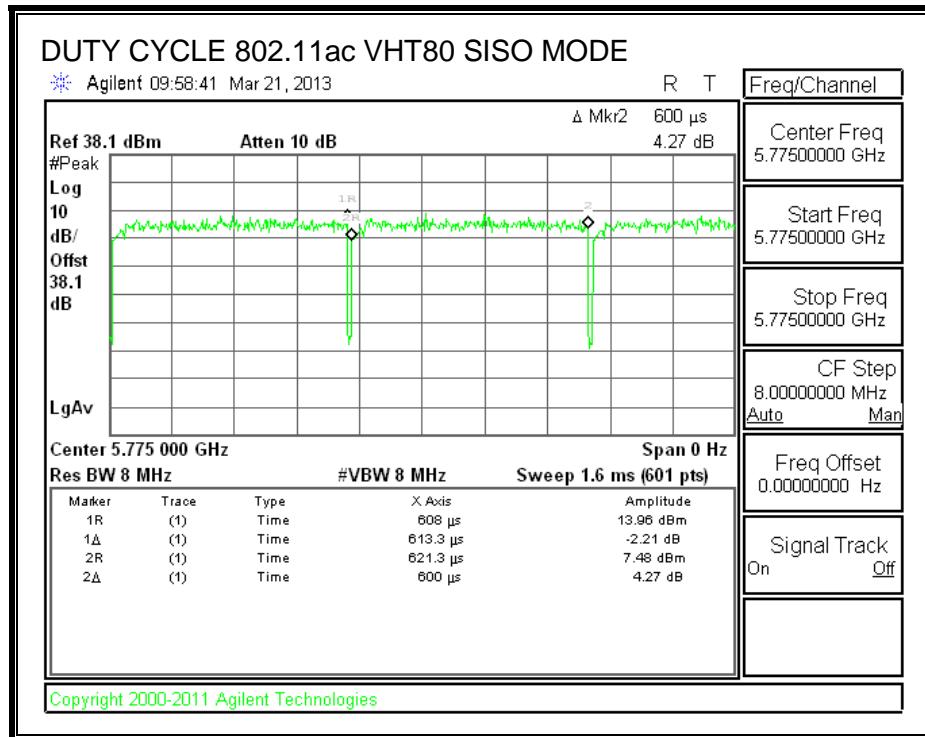

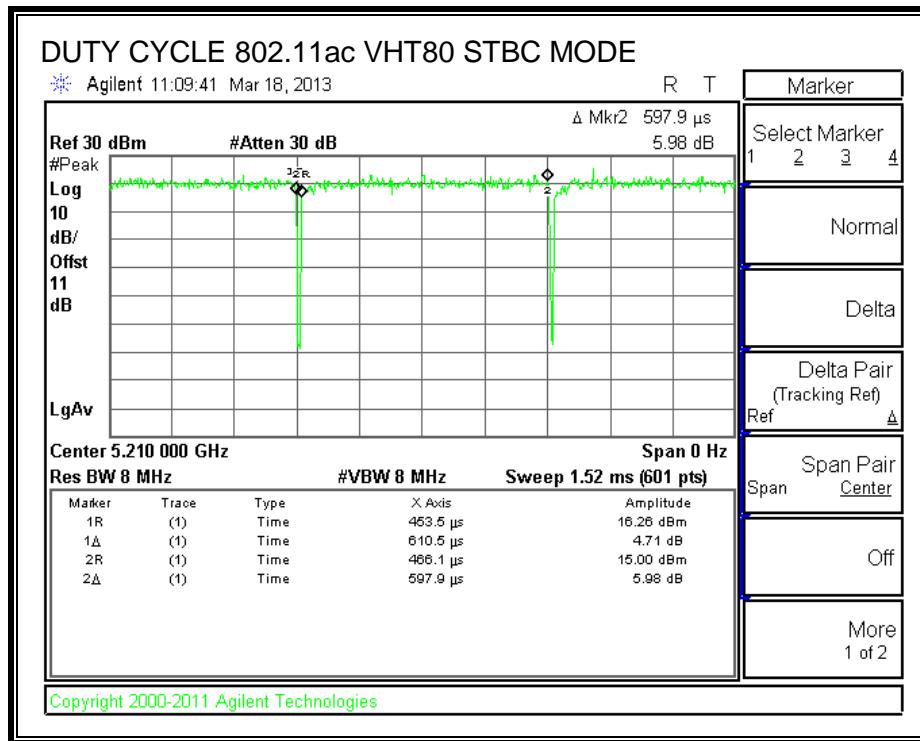

8. ANTENNA PORT TEST RESULTS

8.1. 802.11b 1TX MODE IN THE 2.4 GHz BAND

Covered by testing 11b CDD 3TX, power per chain used, for testing, in the 802.11b 3TX mode is equal or higher than the power per chain that will be used for 802.11b 1TX.

8.1.1. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 31.4 dB (including 30 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

| Channel | Frequency (MHz) | Power (dBm) |
|---------|-----------------|-------------|
| Low1 | 2412 | 19.10 |
| Low2 | 2417 | 20.50 |
| Low3 | 2422 | 21.50 |
| Mid | 2437 | 24.00 |
| High3 | 2452 | 21.50 |
| High2 | 2457 | 20.00 |
| High1 | 2462 | 18.50 |

8.2. 802.11b 2TX MODE IN THE 2.4 GHz BAND

Covered by testing 11b CDD 3TX, power per chain used, for testing, in the 802.11b 3TX mode is equal or higher than the power per chain that will be used for 802.11b 2TX.

8.2.1. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 31.4 dB (including 30 dB pad and 1.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

| Channel | Frequency (MHz) | Chain 0 Power (dBm) | Chain 1 Power (dBm) | Total Power (dBm) |
|---------|-----------------|---------------------|---------------------|-------------------|
| Low1 | 2412 | 17.50 | 17.70 | 20.61 |
| Low2 | 2417 | 18.40 | 18.60 | 21.51 |
| Low3 | 2422 | 19.50 | 19.65 | 22.59 |
| Mid | 2437 | 21.90 | 22.20 | 25.06 |
| High3 | 2452 | 21.90 | 22.10 | 25.01 |
| High2 | 2457 | 20.00 | 20.20 | 23.11 |
| High1 | 2462 | 18.45 | 18.60 | 21.54 |

8.3. 802.11b 3TX MODE IN THE 2.4 GHz BAND

8.3.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS



| Channel | Frequency (MHz) | 6 dB BW Chain 0 (MHz) | 6 dB BW Chain 1 (MHz) | 6 dB BW Chain 2 (MHz) | Minimum Limit (MHz) |
|---------|--------------------|-----------------------------|-----------------------------|-----------------------------|---------------------------|
| Low | 2412 | 10.125 | 10.150 | 10.150 | 0.5 |
| Mid | 2437 | 10.150 | 10.150 | 10.150 | 0.5 |
| High | 2462 | 10.125 | 10.125 | 10.150 | 0.5 |


6 dB BANDWIDTH, Chain 0

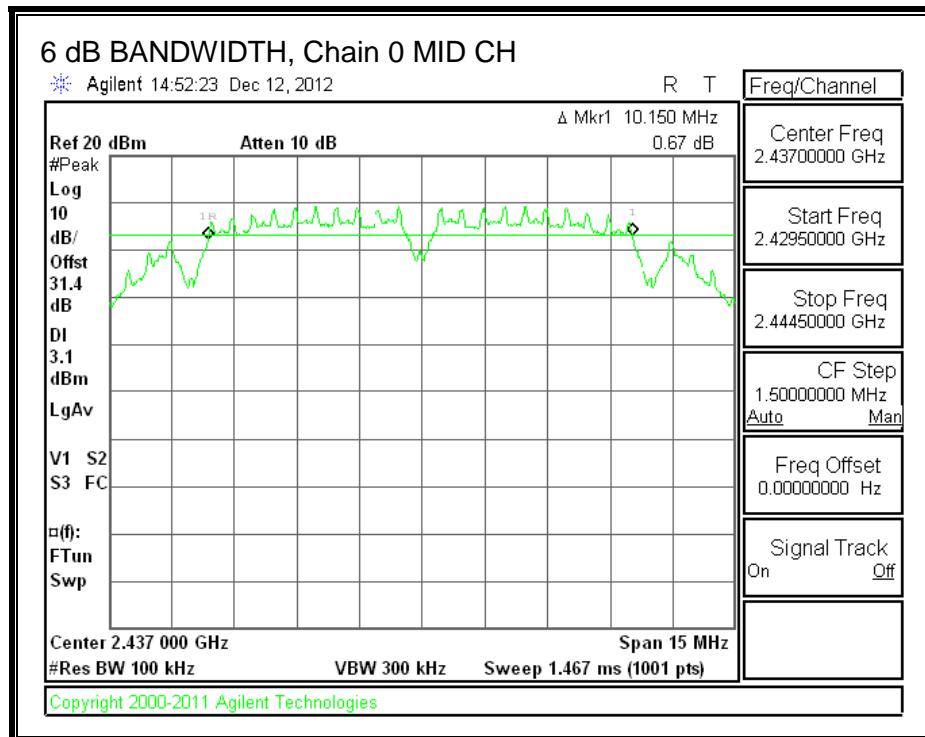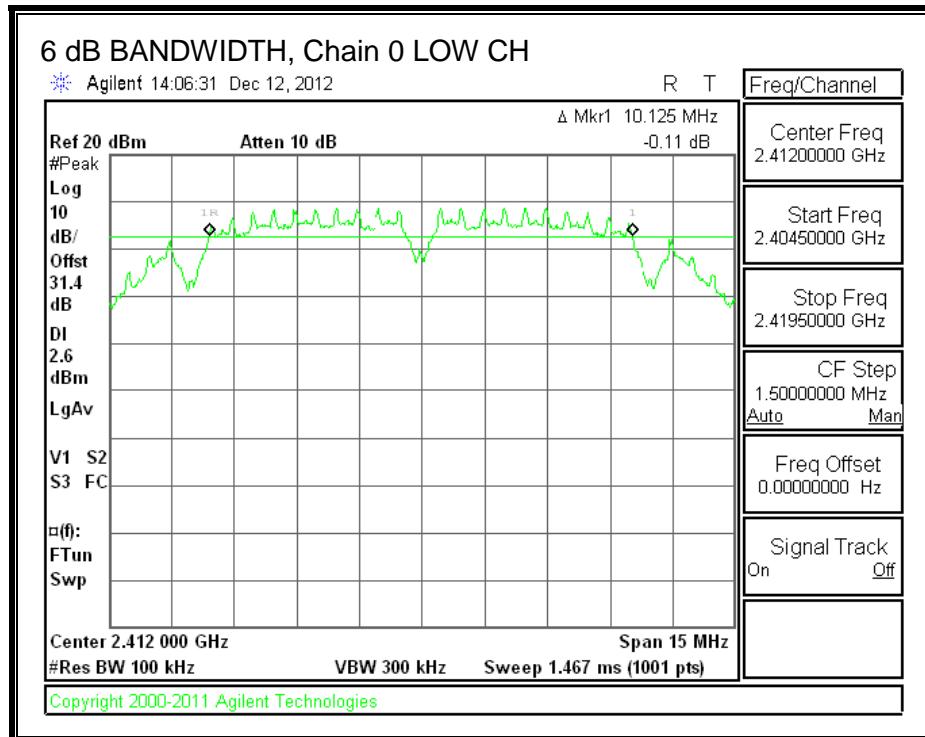


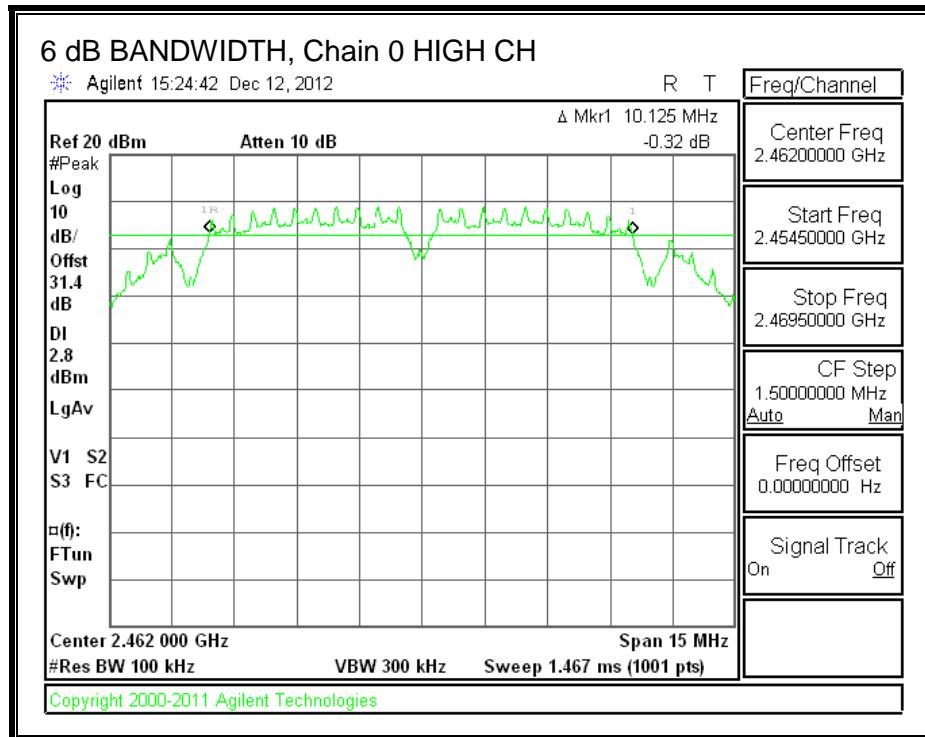



6 dB BANDWIDTH, Chain 1

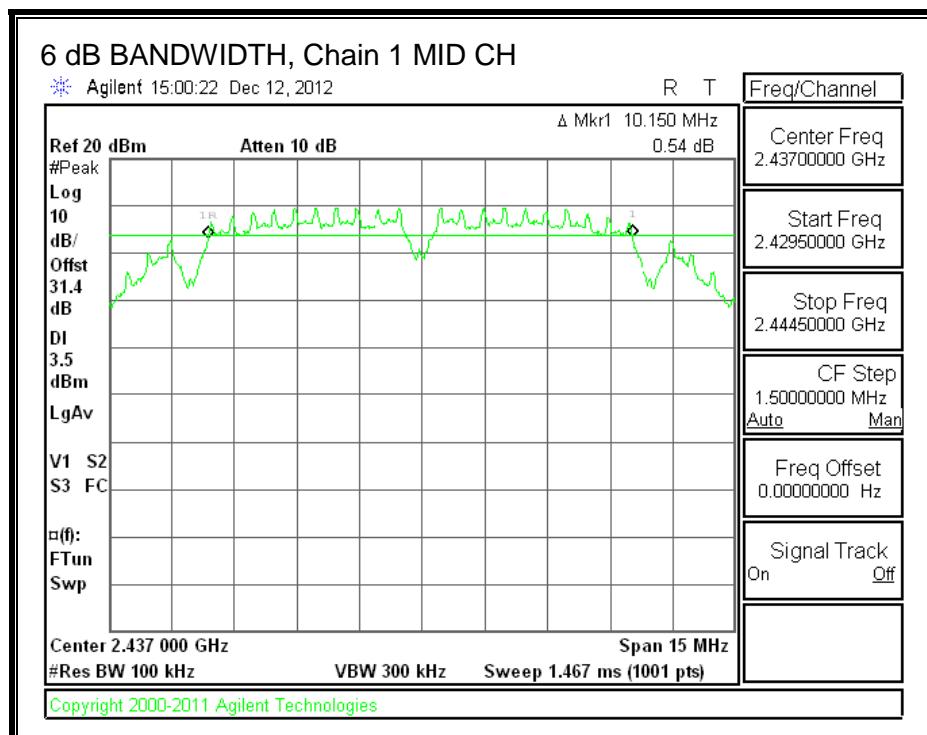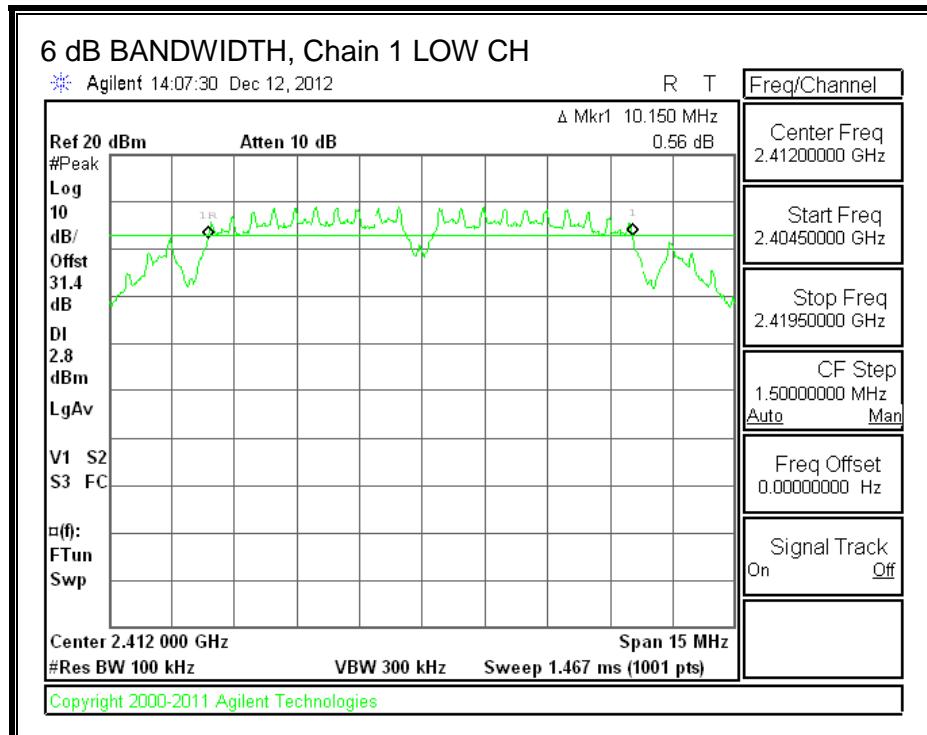

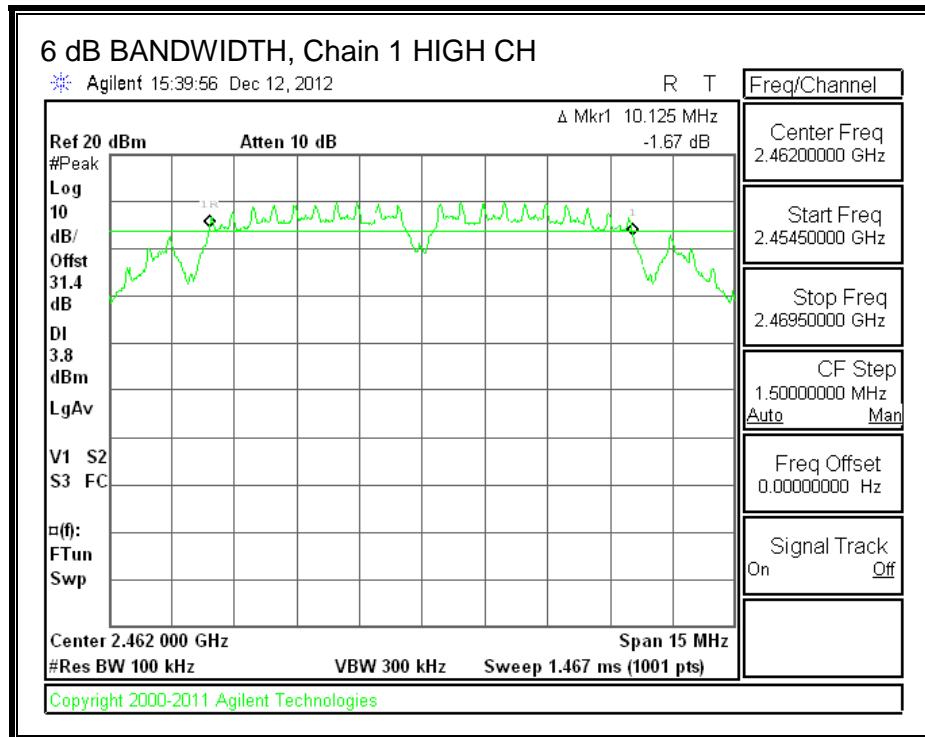

6 dB BANDWIDTH, Chain 2

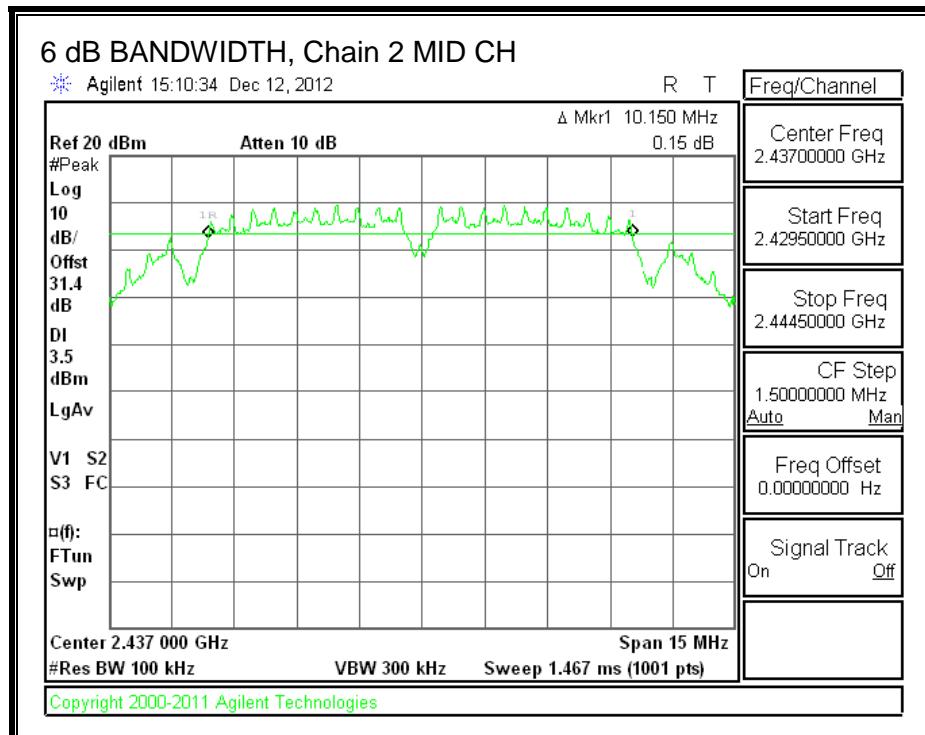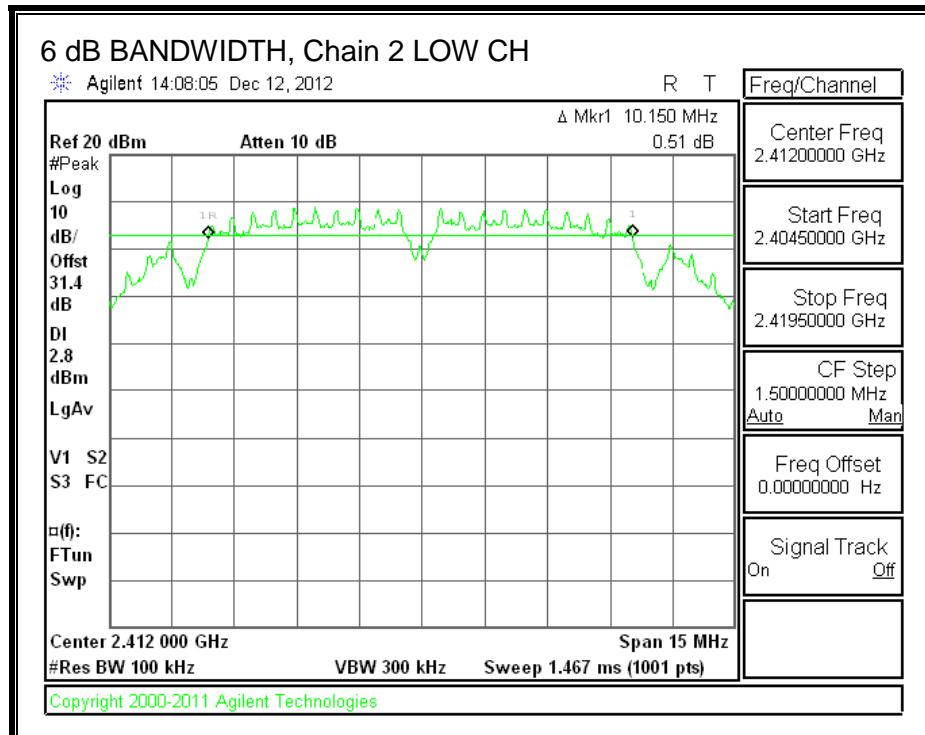

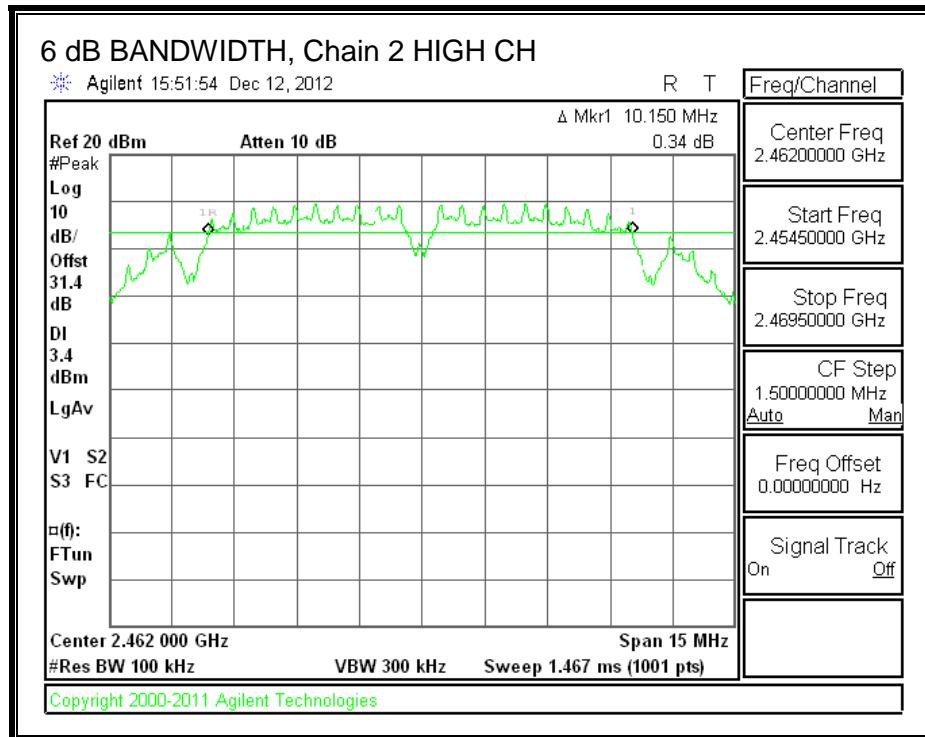

8.3.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.


RESULTS



| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Low | 2412 | 13.1333 | 13.1136 | 13.1438 |
| Mid | 2437 | 13.1222 | 13.1106 | 13.1364 |
| High | 2462 | 13.1229 | 13.1107 | 13.1522 |

99% BANDWIDTH, Chain 0

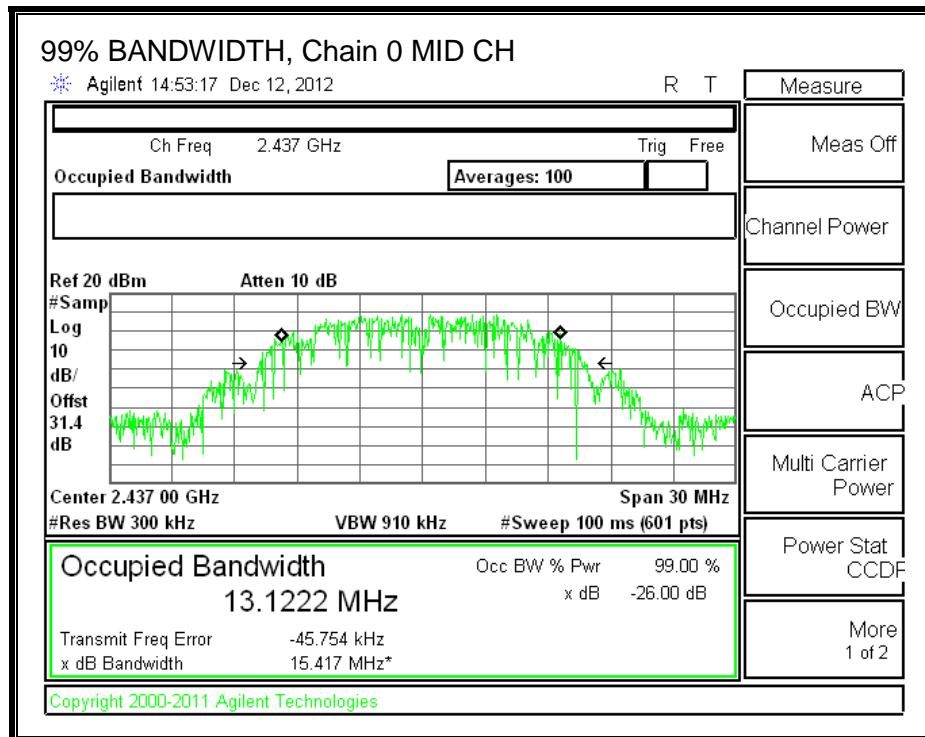
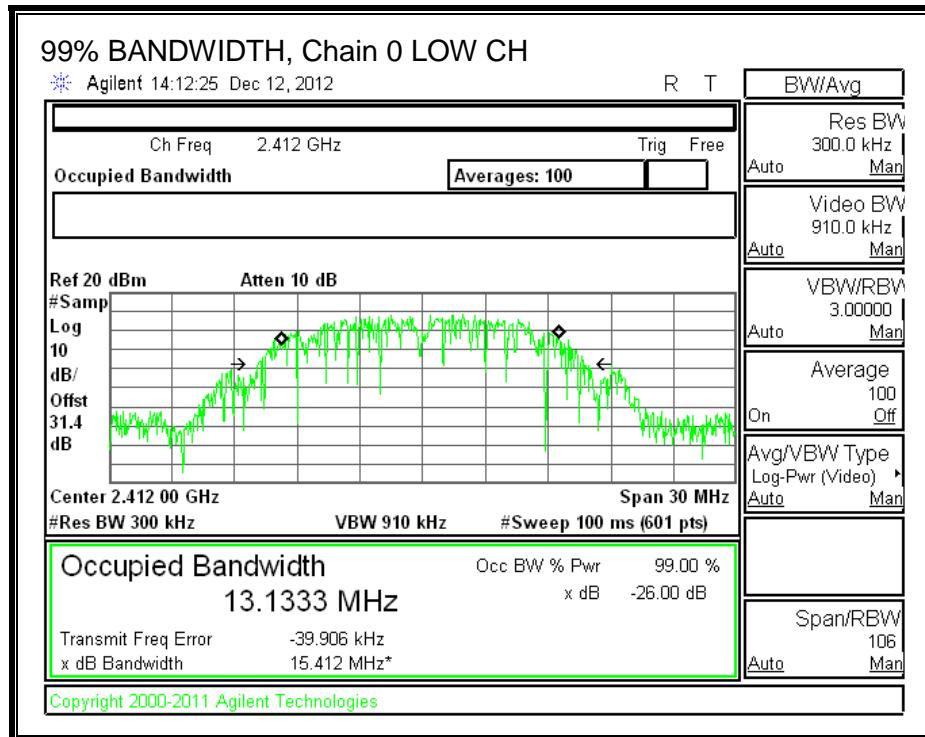


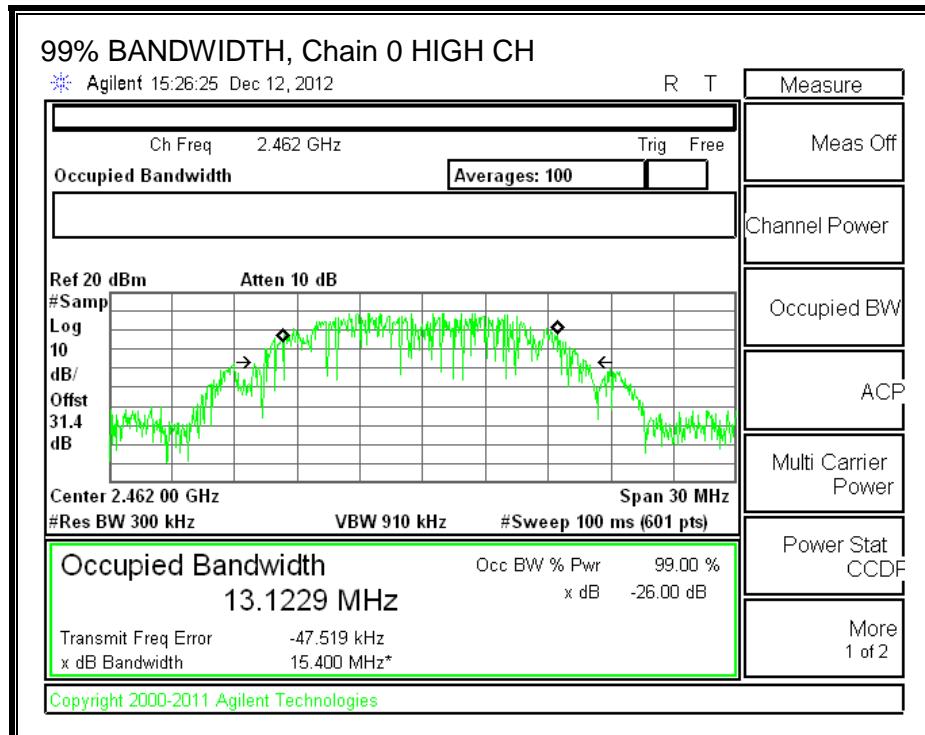


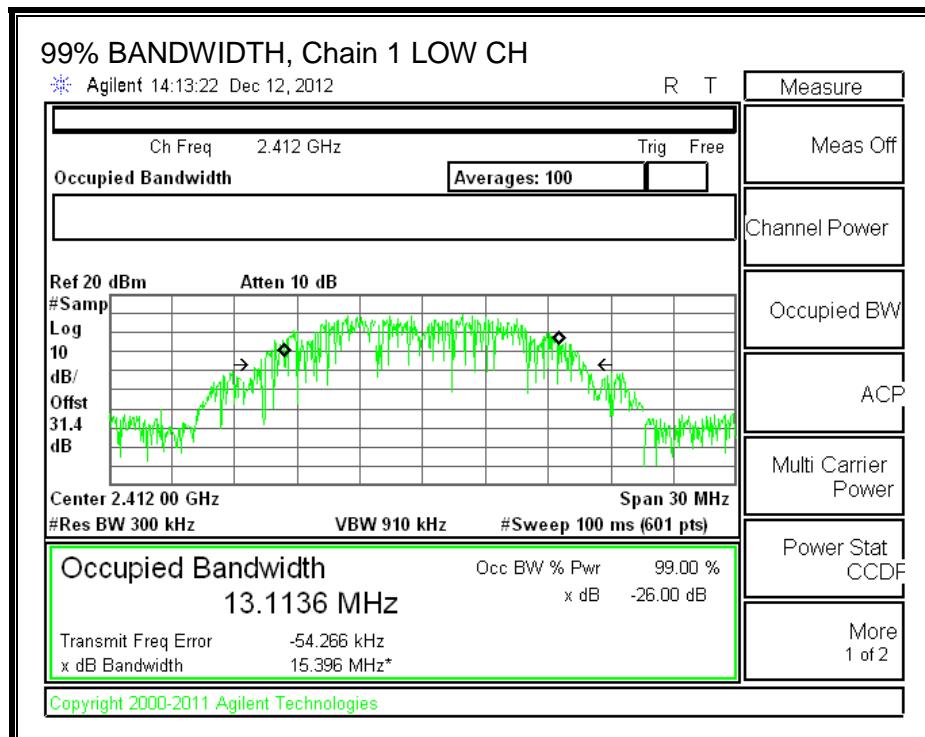99% BANDWIDTH, Chain 1

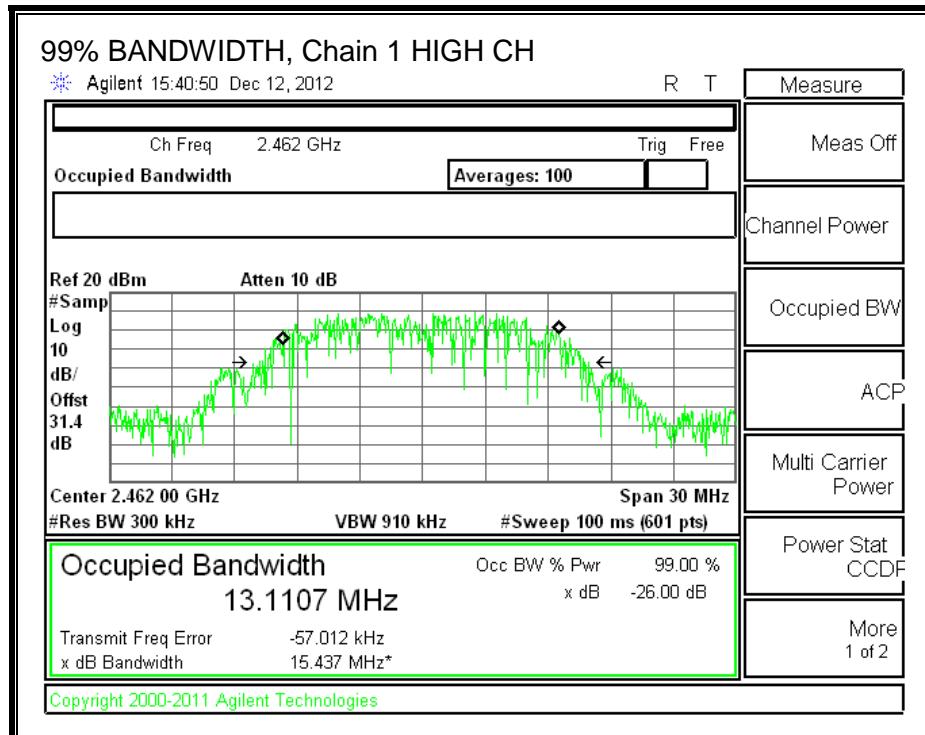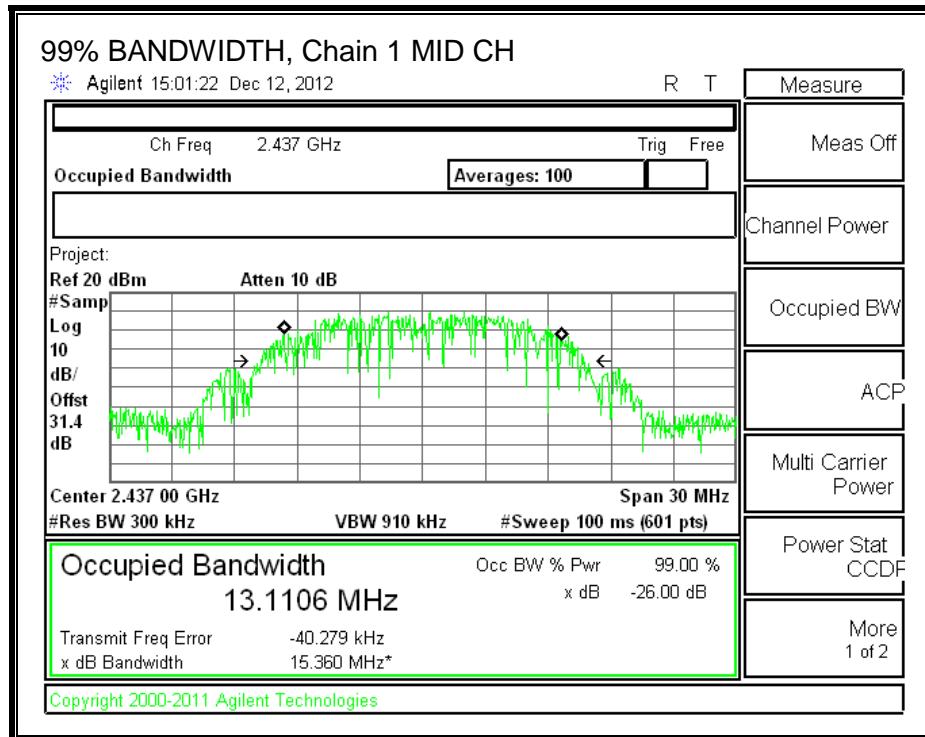

99% BANDWIDTH, Chain 2

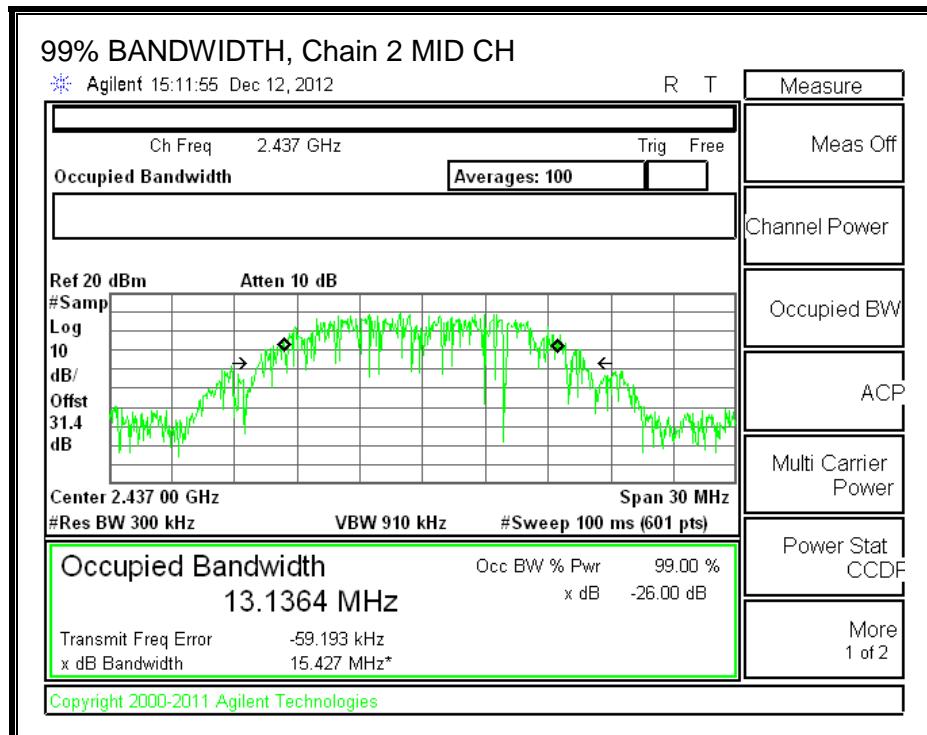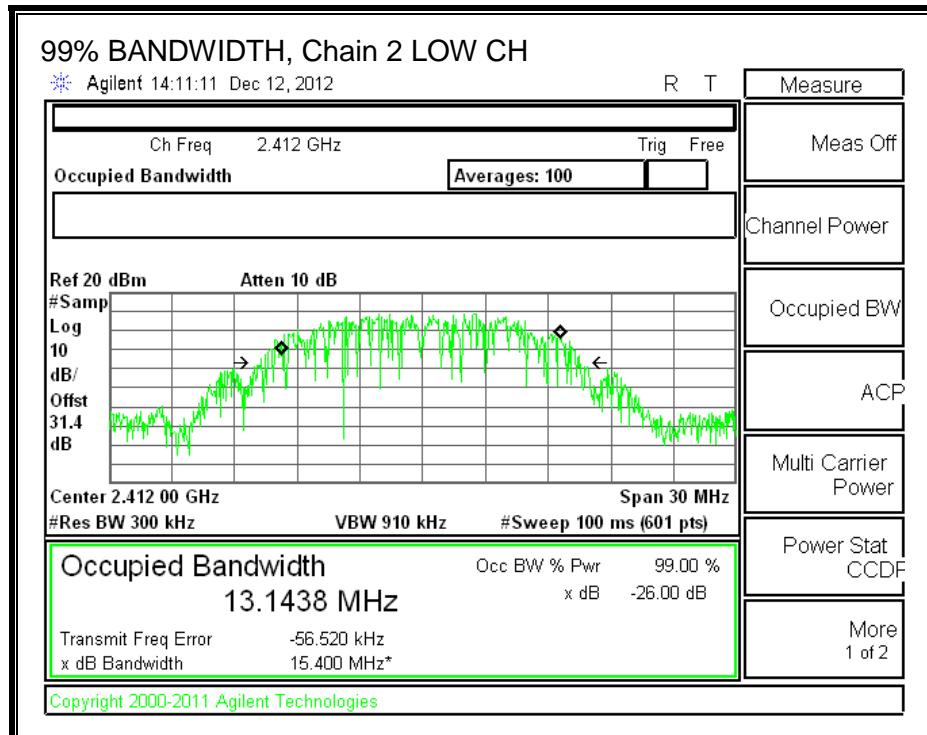

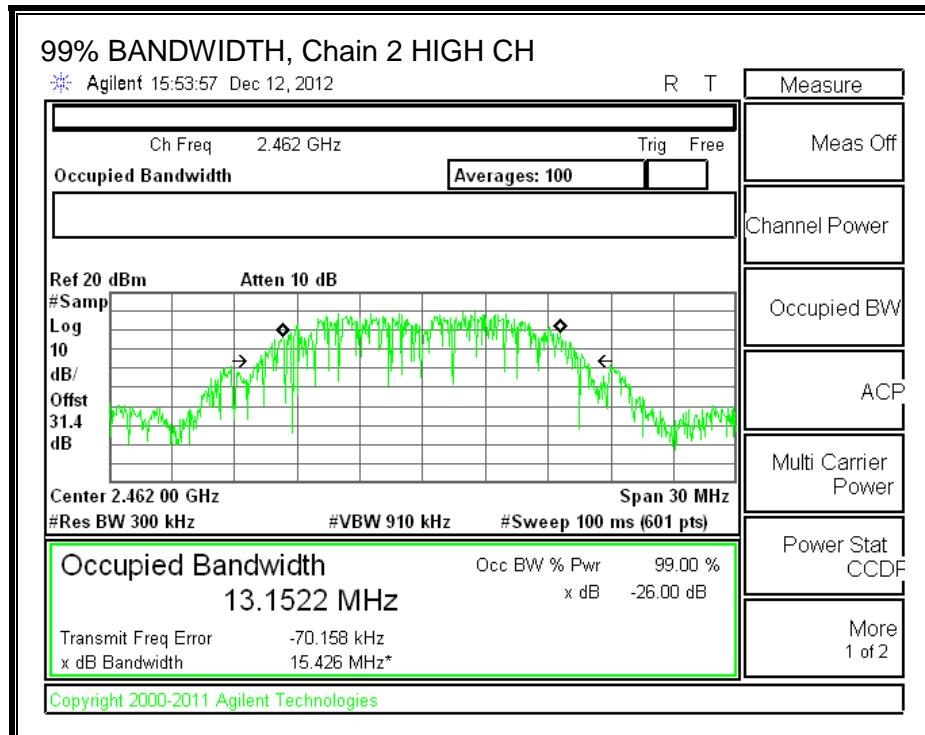

8.3.3. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For output power consideration, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Uncorrelated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 3.00 | 3.00 | 3.10 | 3.03 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | 3.03 | 30.00 | 30 | 36 | 30.00 |
| Mid | 2437 | 3.03 | 30.00 | 30 | 36 | 30.00 |
| High | 2462 | 3.03 | 30.00 | 30 | 36 | 30.00 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low1 | 2412 | 15.30 | 15.85 | 15.45 | 20.31 | 30.00 | -9.69 |
| Low2 | 2417 | 16.80 | 17.30 | 17.10 | 21.84 | 30.00 | -8.16 |
| Low3 | 2422 | 17.90 | 18.40 | 18.20 | 22.94 | 30.00 | -7.06 |
| Mid | 2437 | 20.97 | 21.40 | 21.20 | 25.96 | 30.00 | -4.04 |
| High3 | 2452 | 20.99 | 21.45 | 21.21 | 25.99 | 30.00 | -4.01 |
| High2 | 2457 | 19.35 | 19.80 | 19.56 | 24.35 | 30.00 | -5.65 |
| High1 | 2462 | 18.42 | 18.81 | 18.60 | 23.38 | 30.00 | -6.62 |

8.3.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-210 A8.2



The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


RESULTS

PSD Results


| Channel | Frequency (MHz) | Chain 0 Meas (dBm) | Chain 1 Meas (dBm) | Chain 2 Meas (dBm) | Total PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|--------------------------|--------------------------|--------------------------|-----------------------|----------------|----------------|
| Low | 2412 | -6.22 | -6.35 | -5.78 | -1.34 | 8.0 | -9.3 |
| Mid | 2437 | -4.30 | -4.02 | -4.78 | 0.42 | 8.0 | -7.6 |
| High | 2462 | -4.72 | -4.49 | -4.87 | 0.08 | 8.0 | -7.9 |



PSD, Chain 0

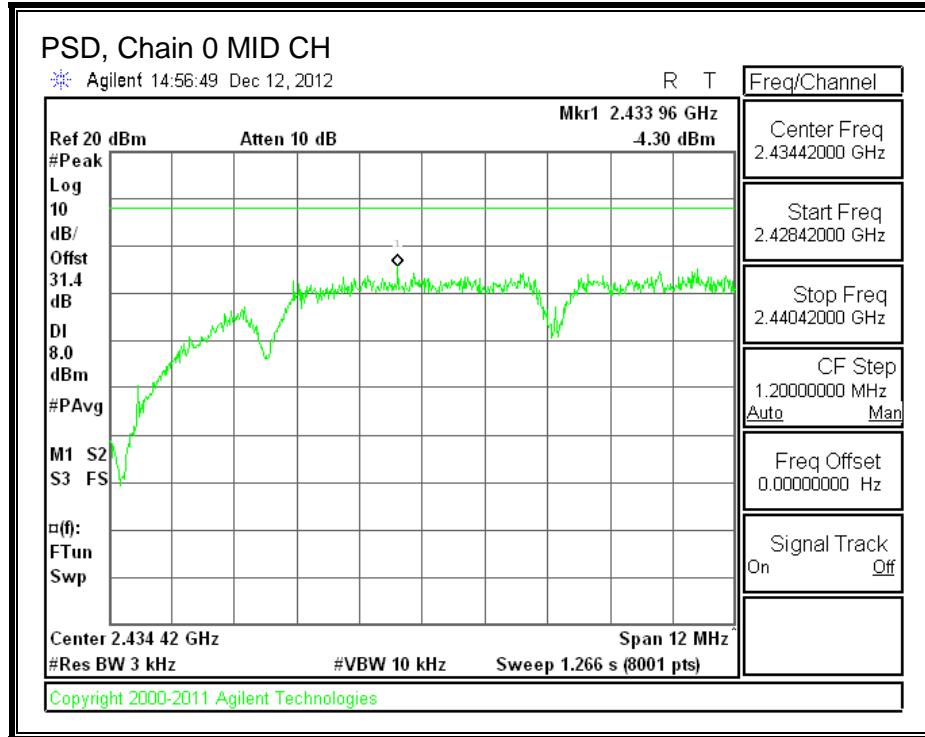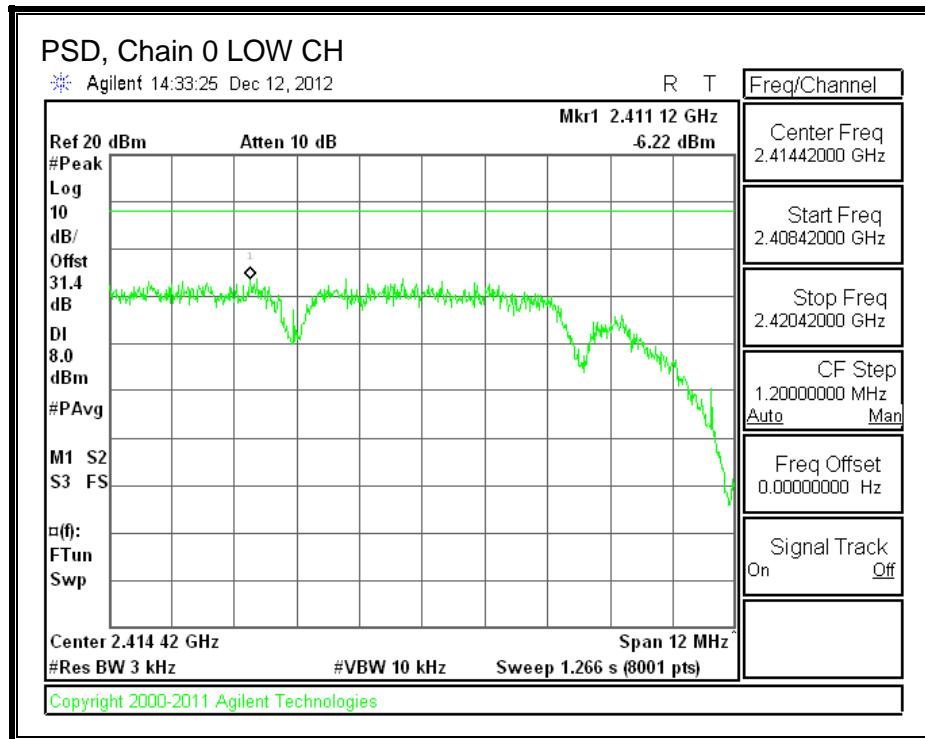


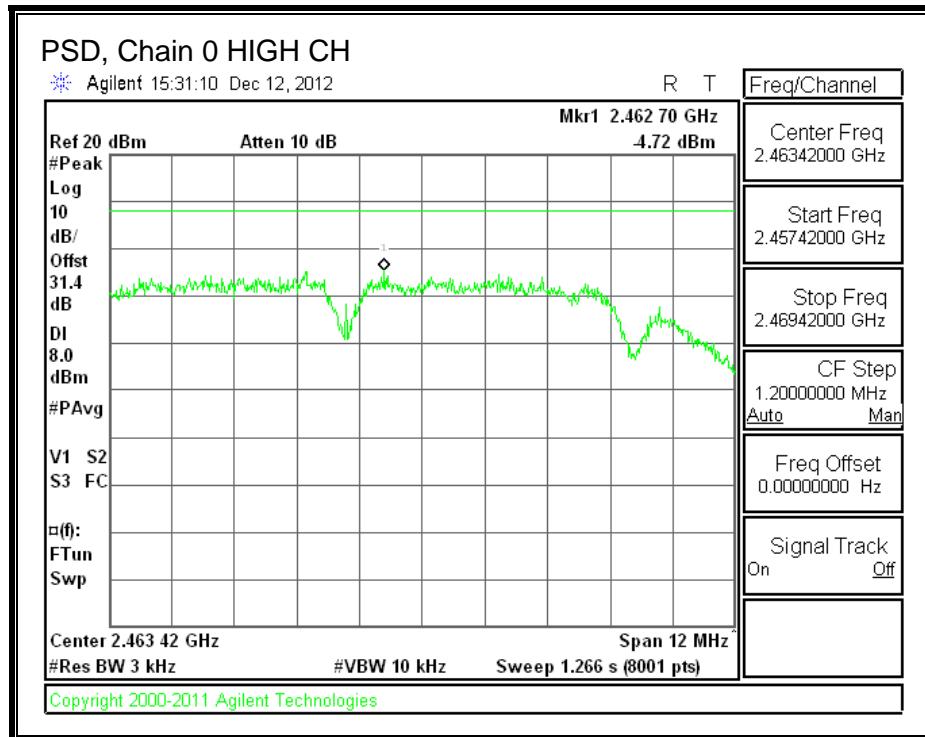



PSD, Chain 1

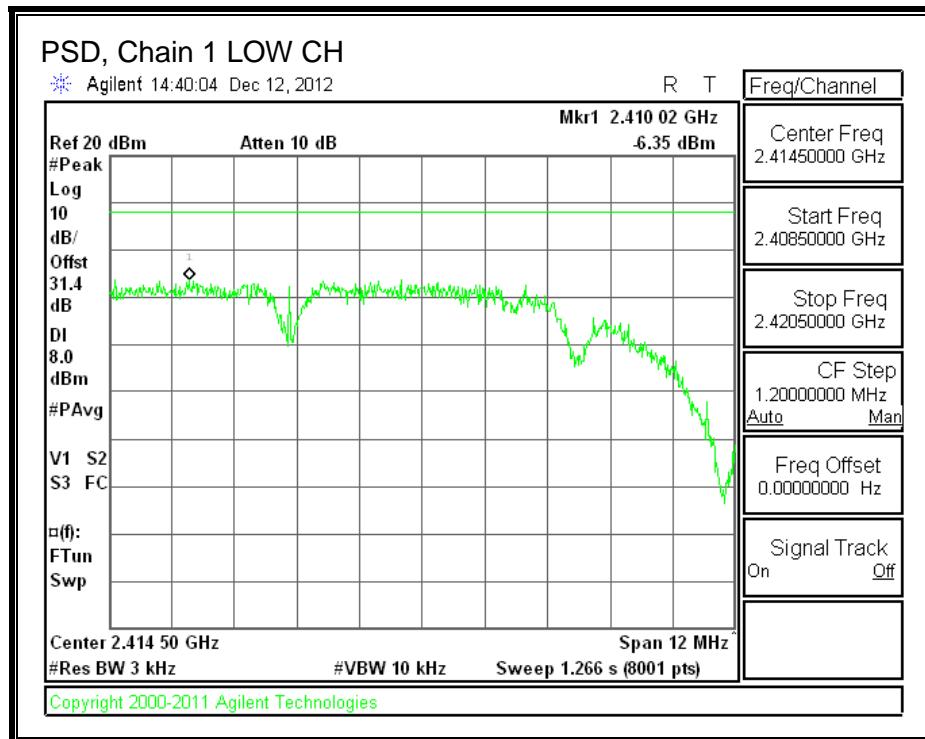

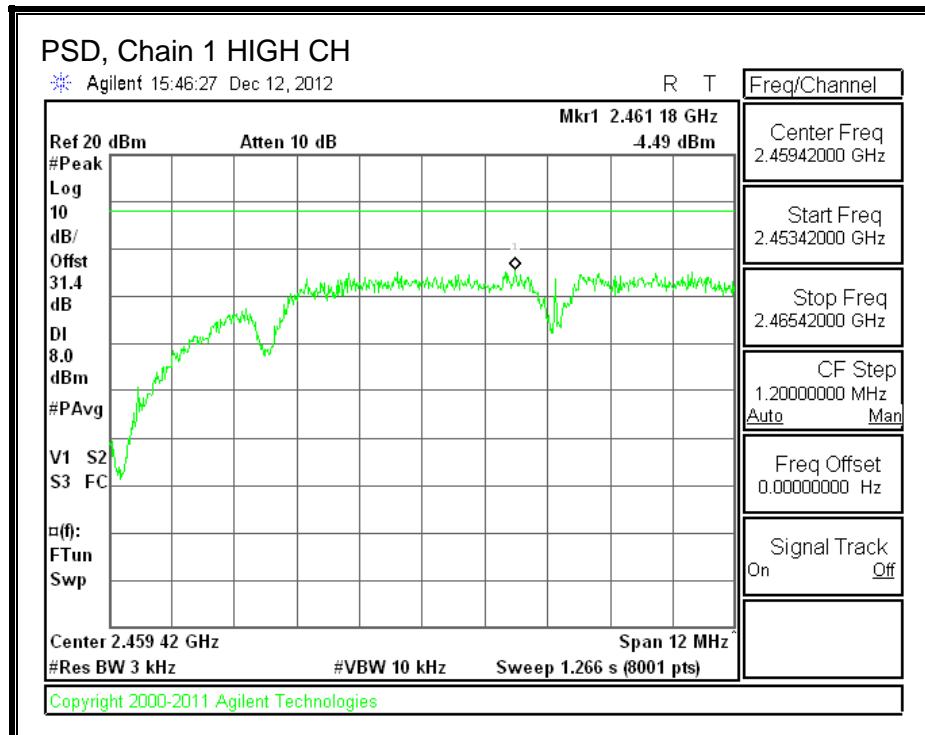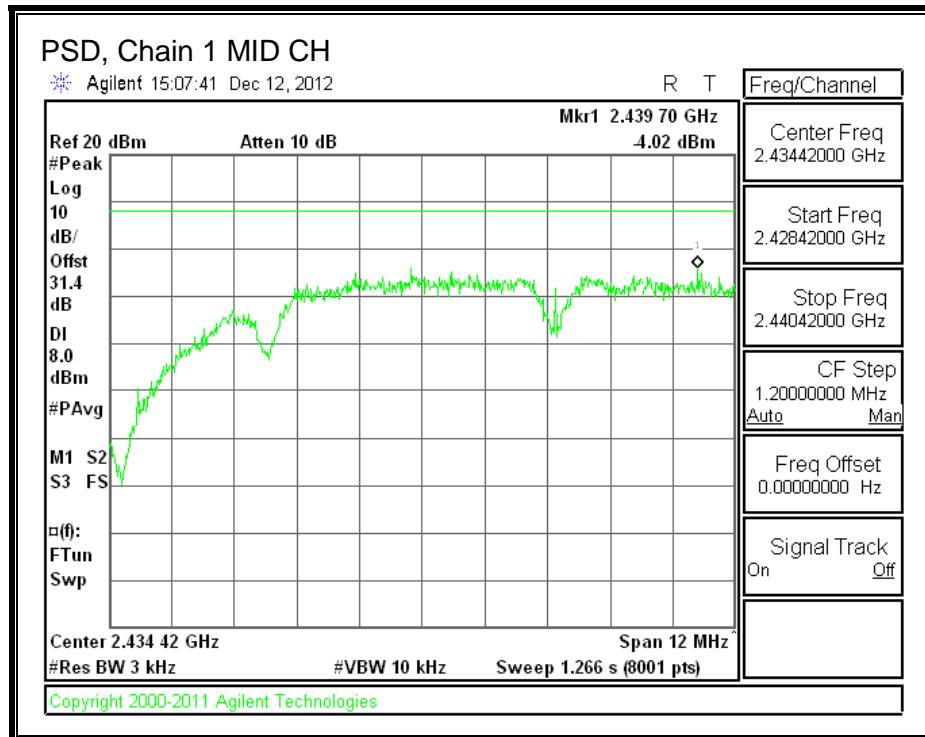

PSD, Chain 2

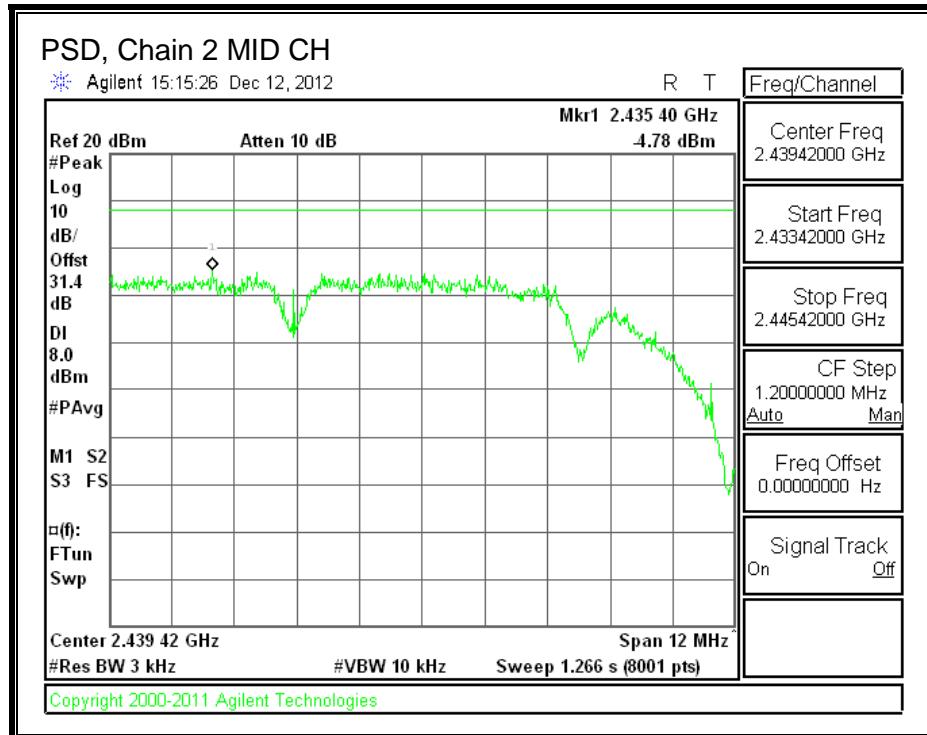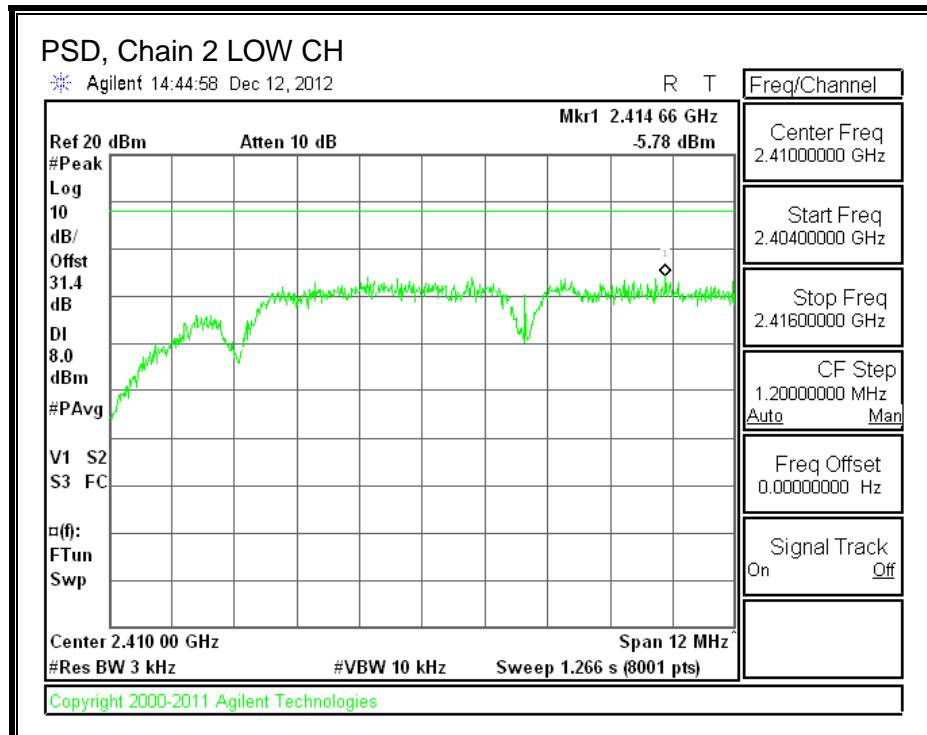

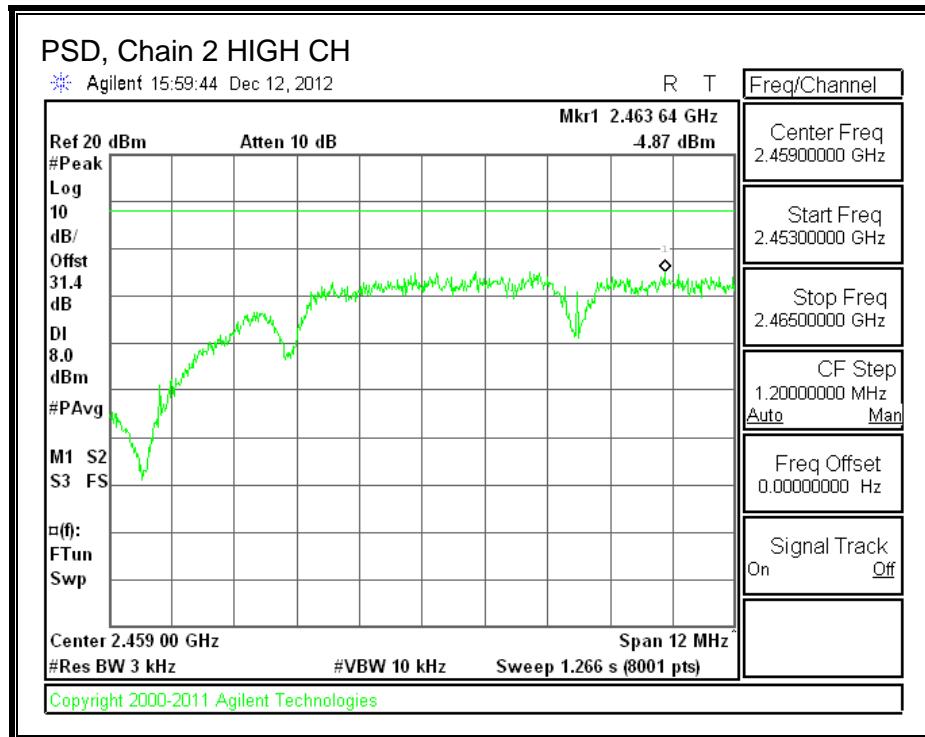

8.3.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-210 A8.5


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL, Chain 0

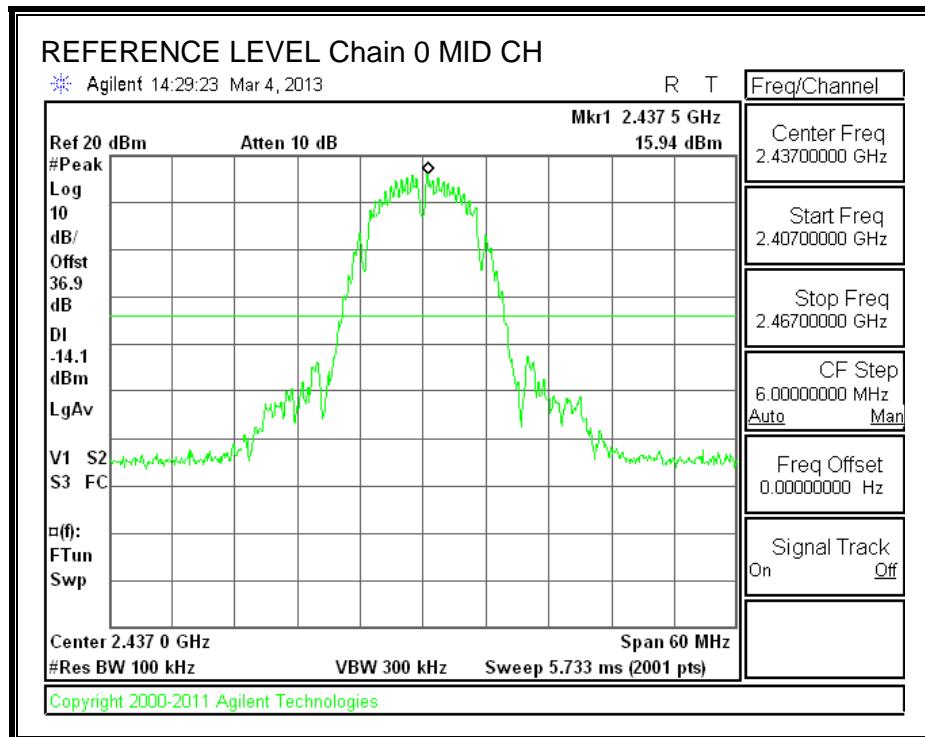



LOW CHANNEL BANDEDGE, Chain 0

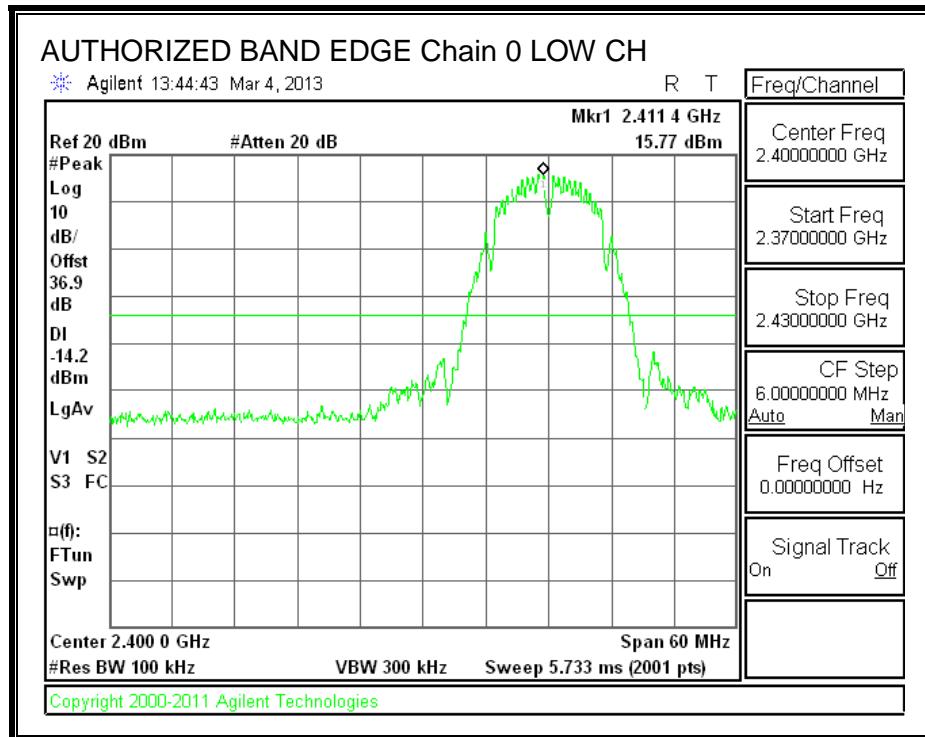


HIGH CHANNEL BANDEDGE, Chain 0

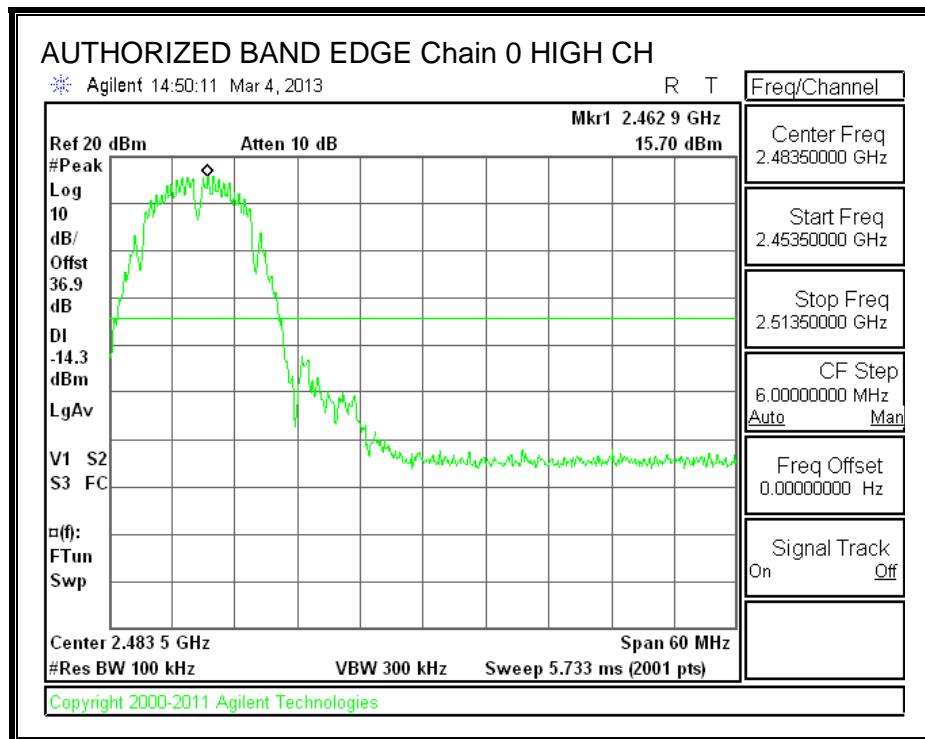


OUT-OF-BAND EMISSIONS, Chain 0

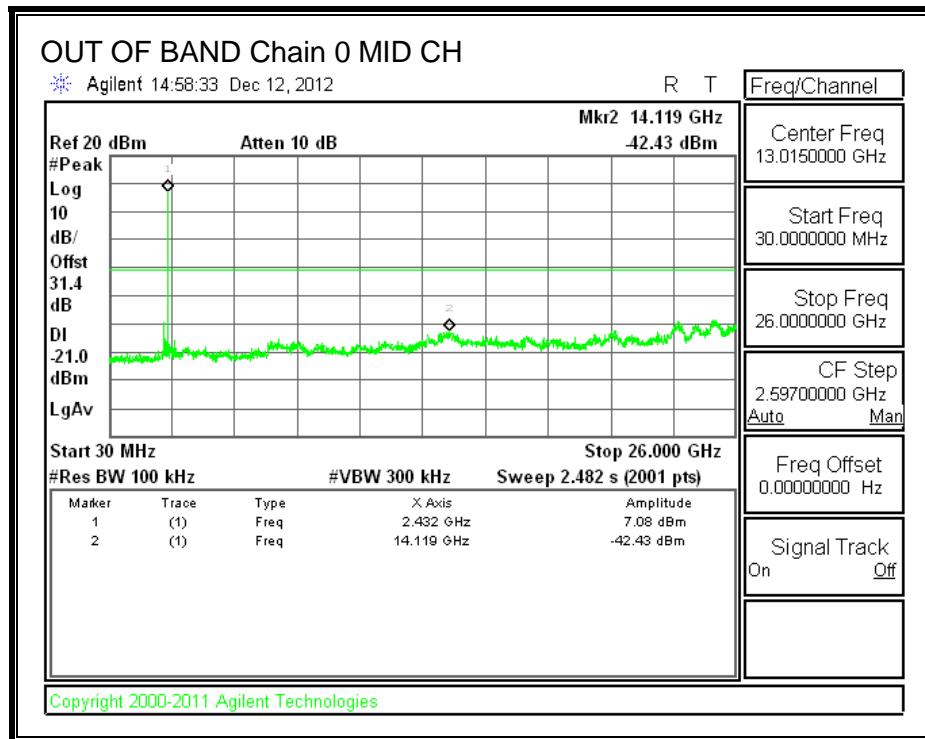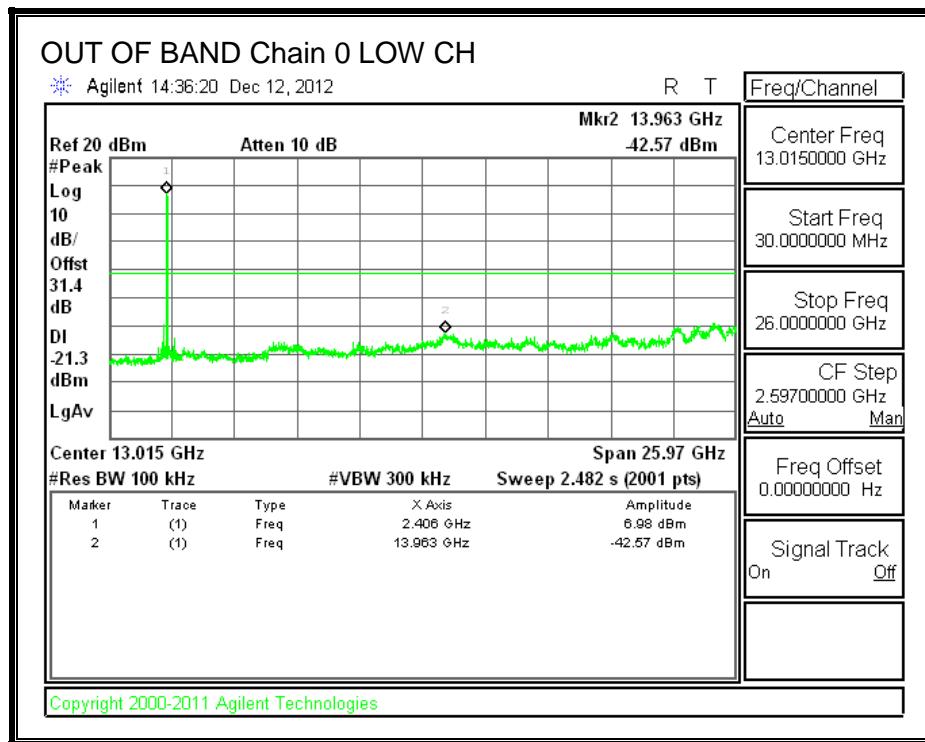


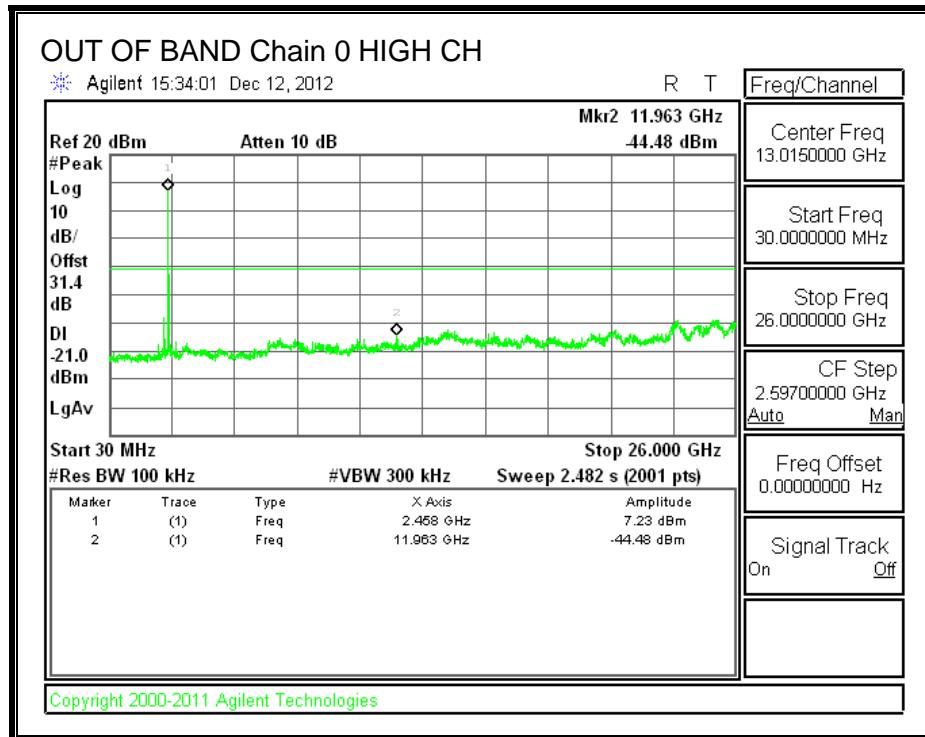


IN-BAND REFERENCE LEVEL, Chain 1

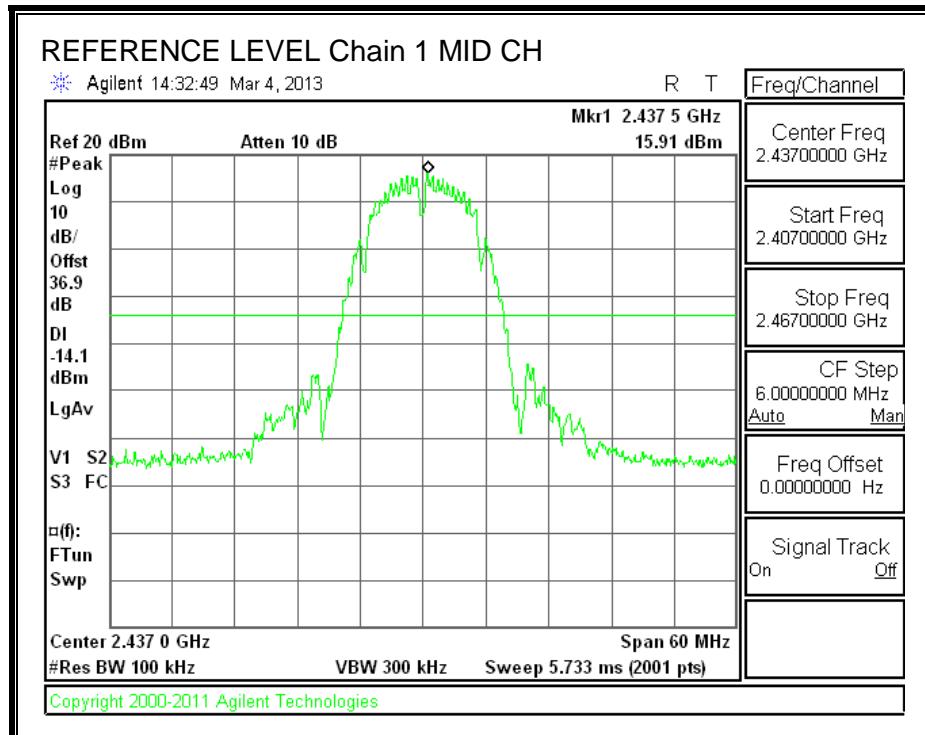



LOW CHANNEL BANDEDGE, Chain 1

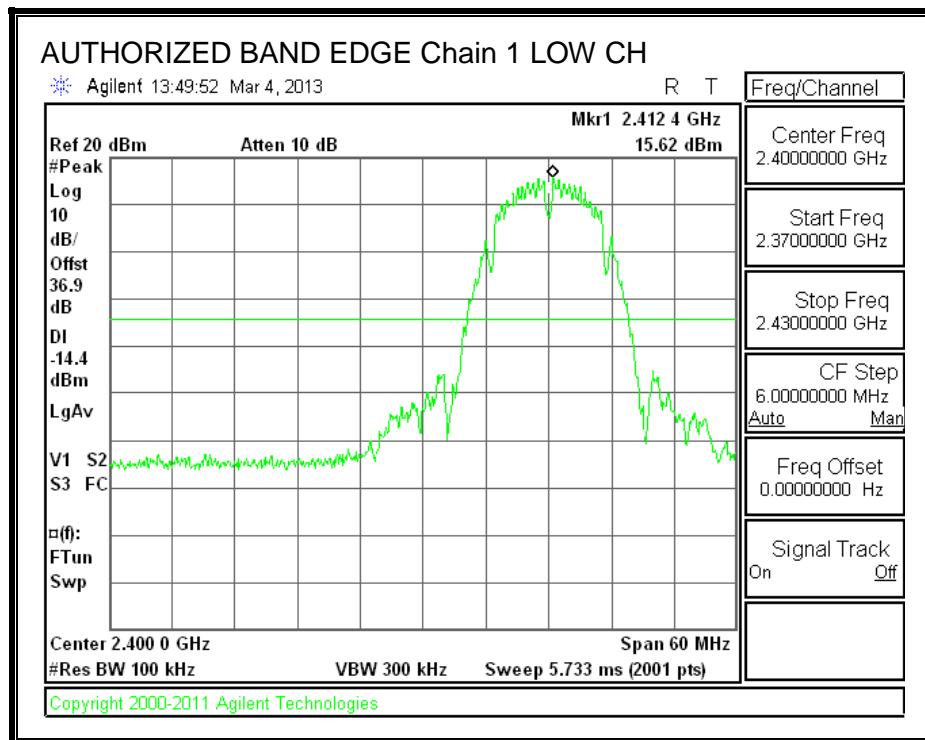


HIGH CHANNEL BANDEDGE, Chain 1

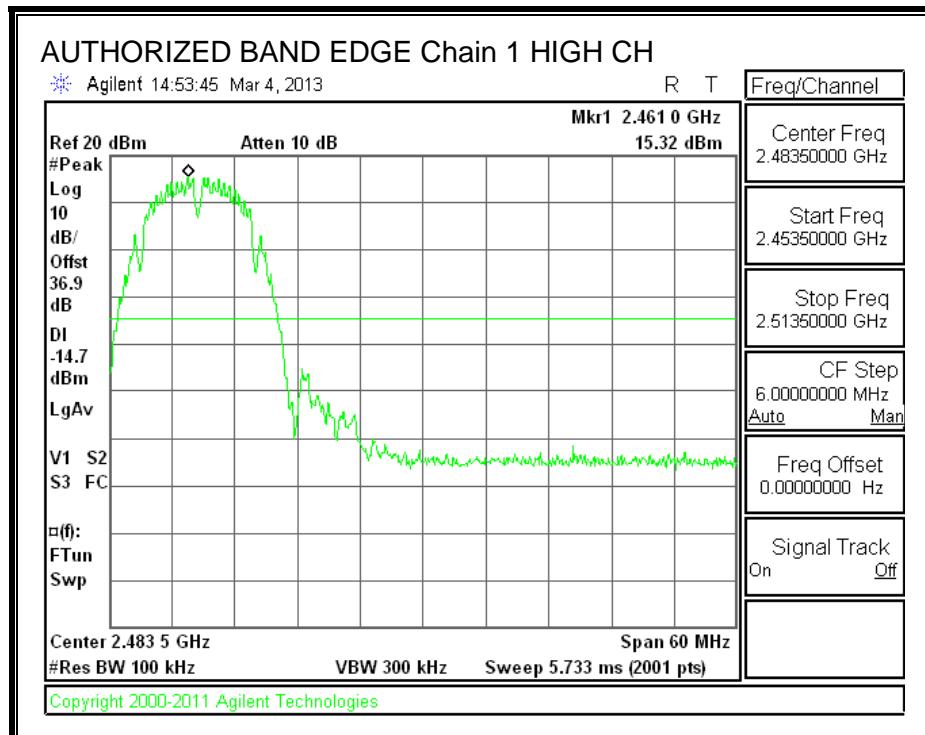


OUT-OF-BAND EMISSIONS, Chain 1

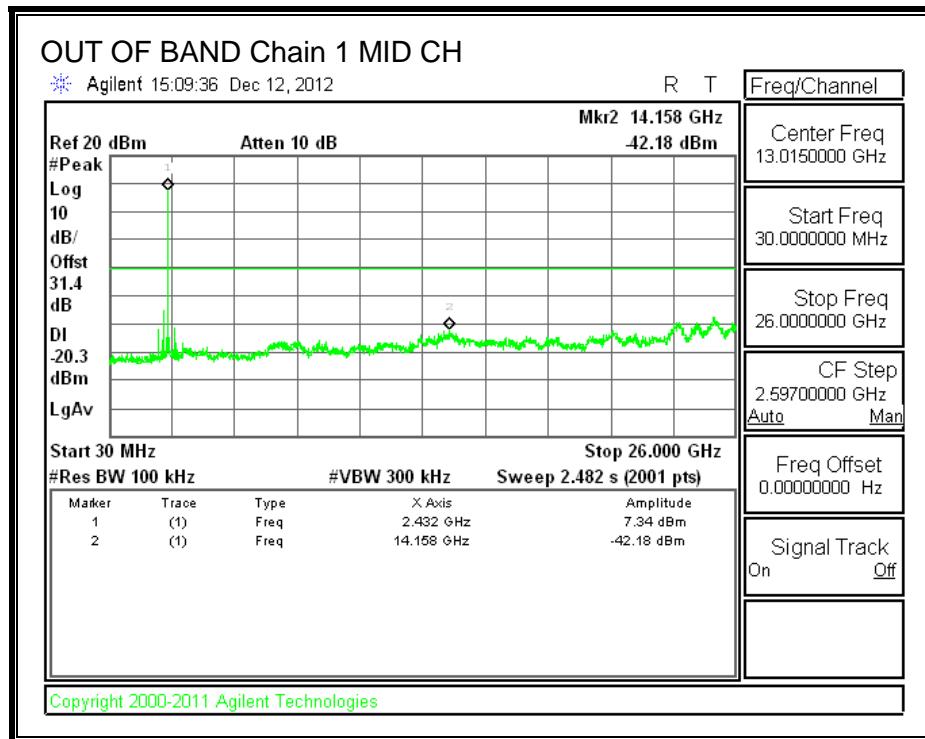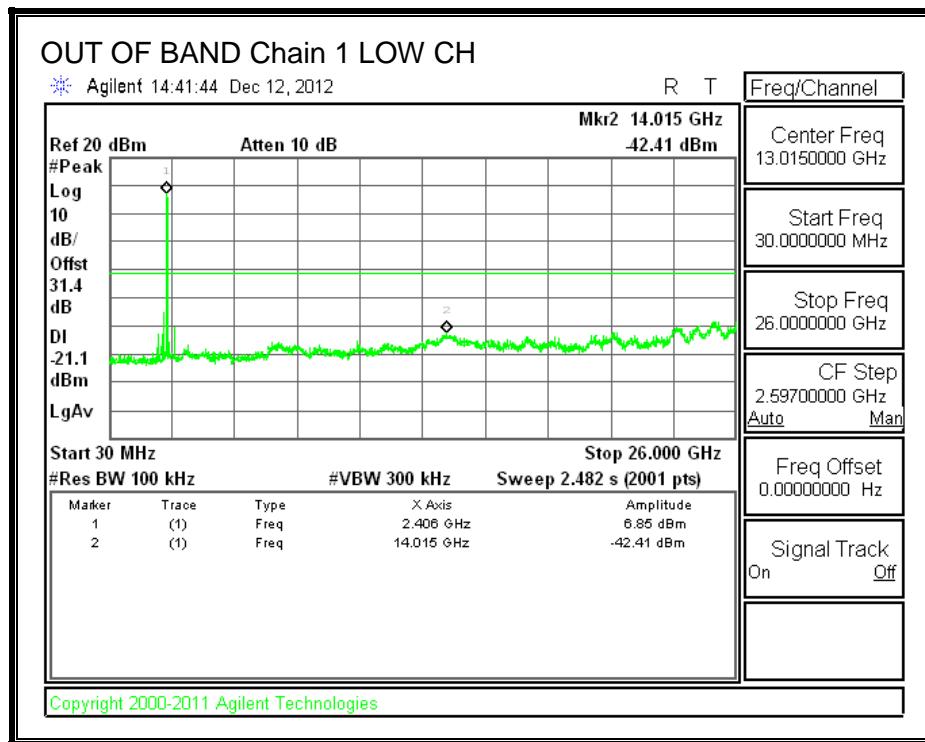


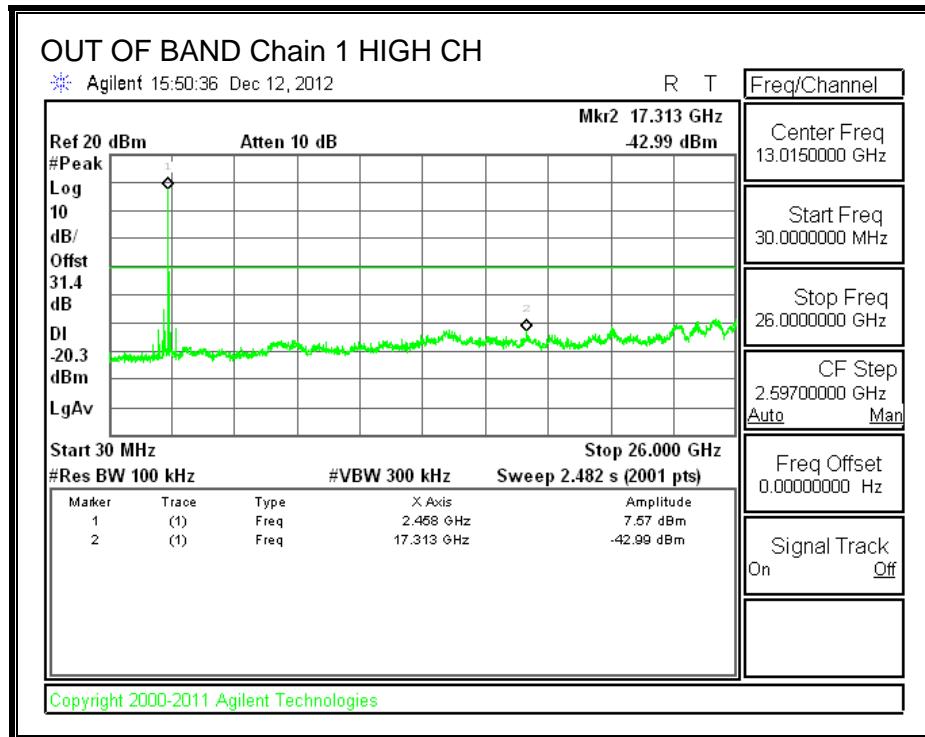


IN-BAND REFERENCE LEVEL, Chain 2

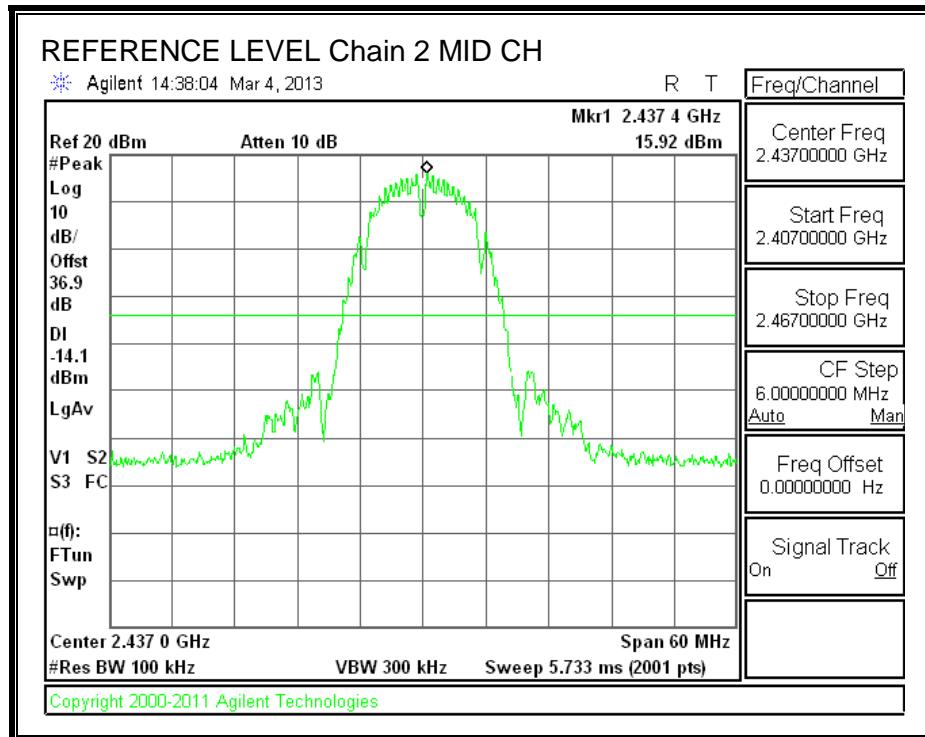



LOW CHANNEL BANDEDGE, Chain 2

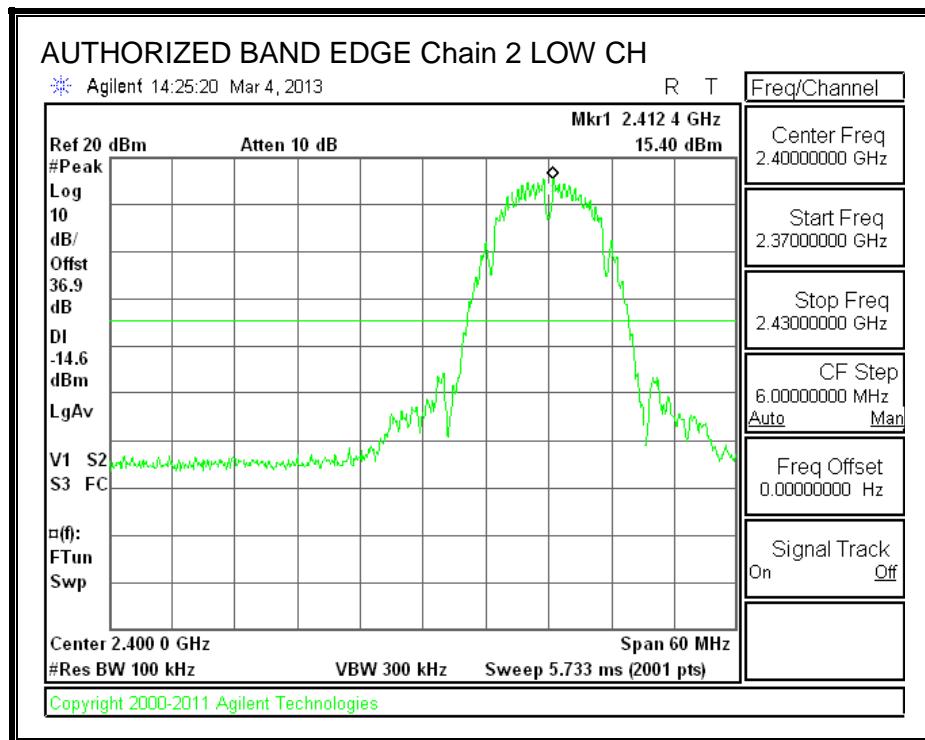


HIGH CHANNEL BANDEDGE, Chain 2

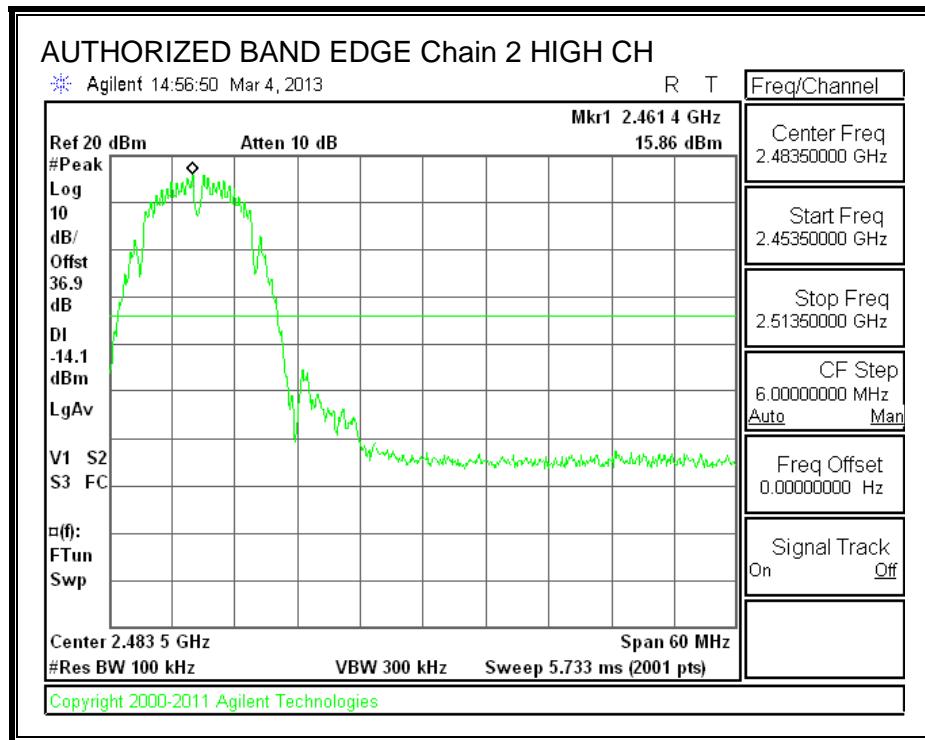

OUT-OF-BAND EMISSIONS, Chain 2

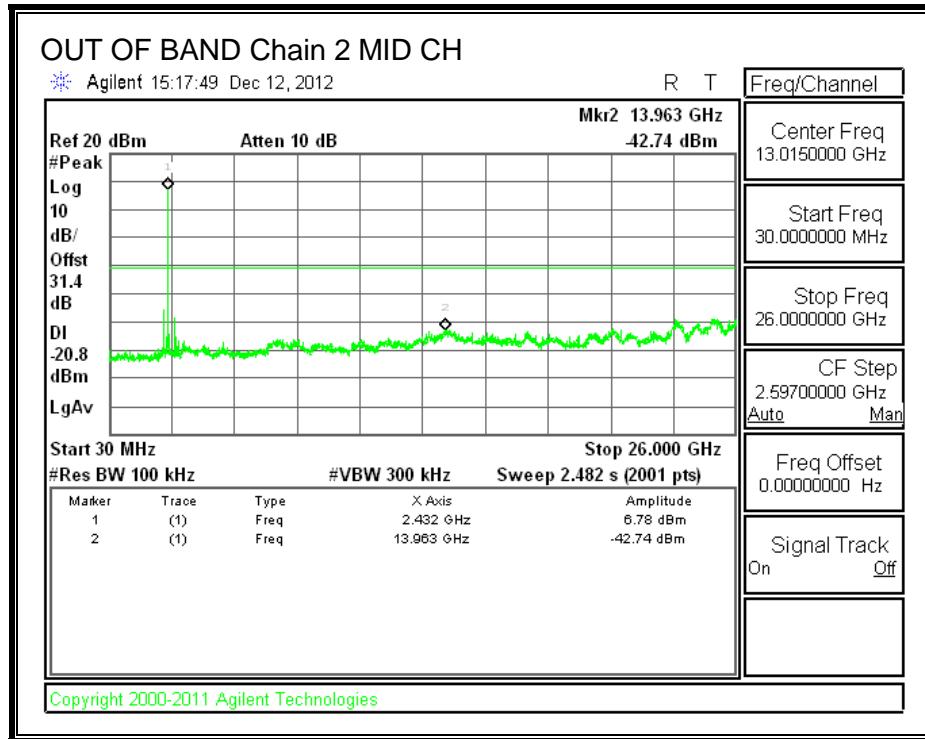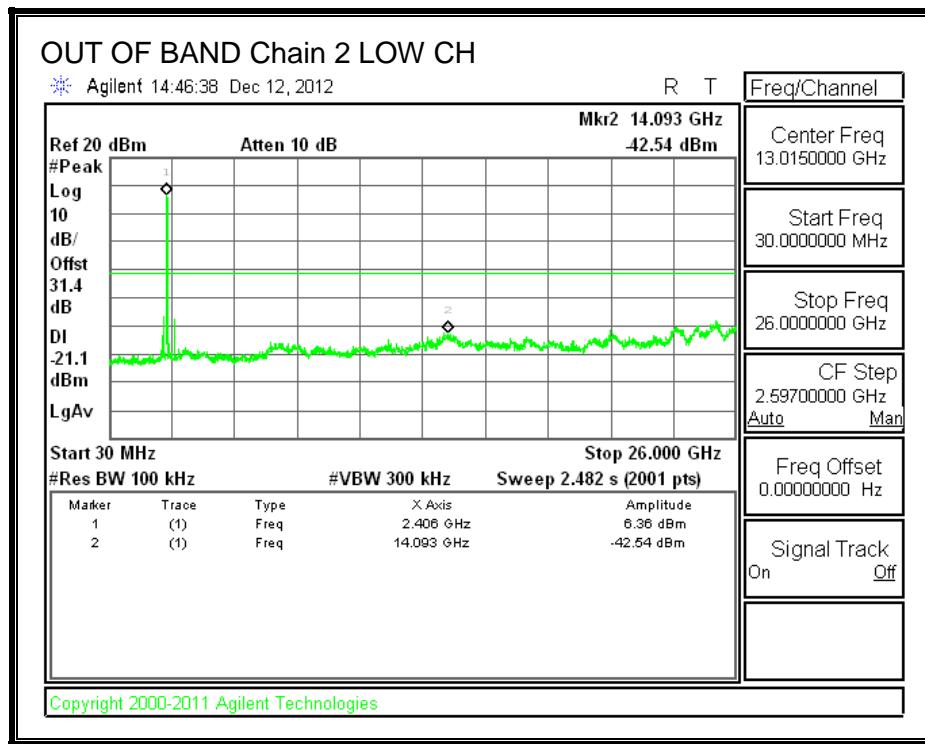

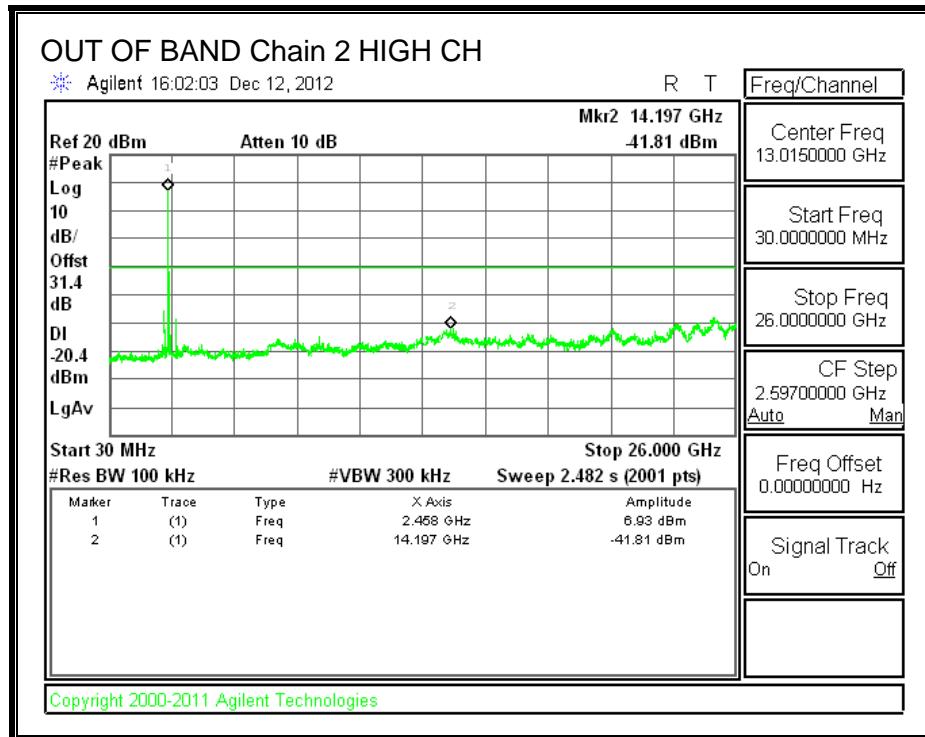

8.4. 802.11g 1TX MODE IN THE 2.4 GHz BAND

8.4.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low | 2412 | 16.42 | 0.5 |
| Mid | 2437 | 16.38 | 0.5 |
| High | 2462 | 16.42 | 0.5 |

6 dB BANDWIDTH

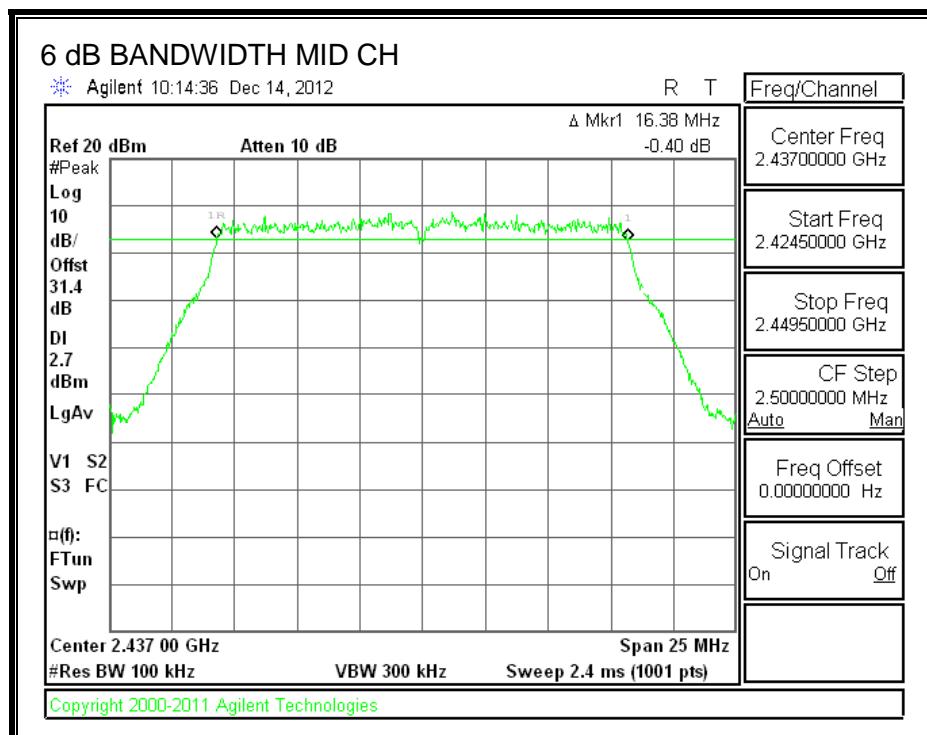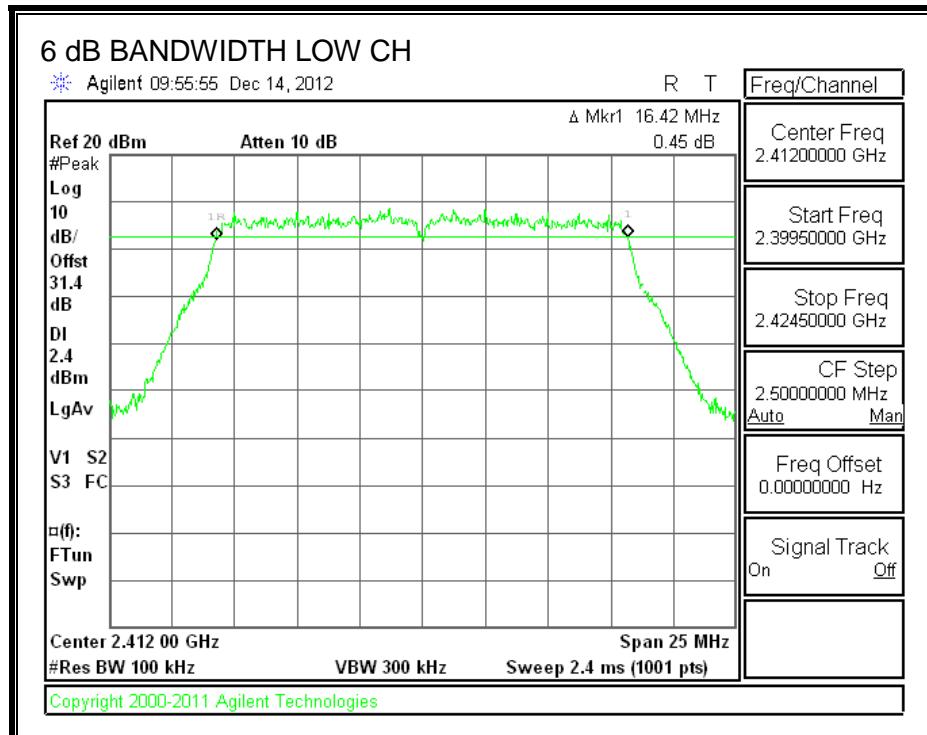

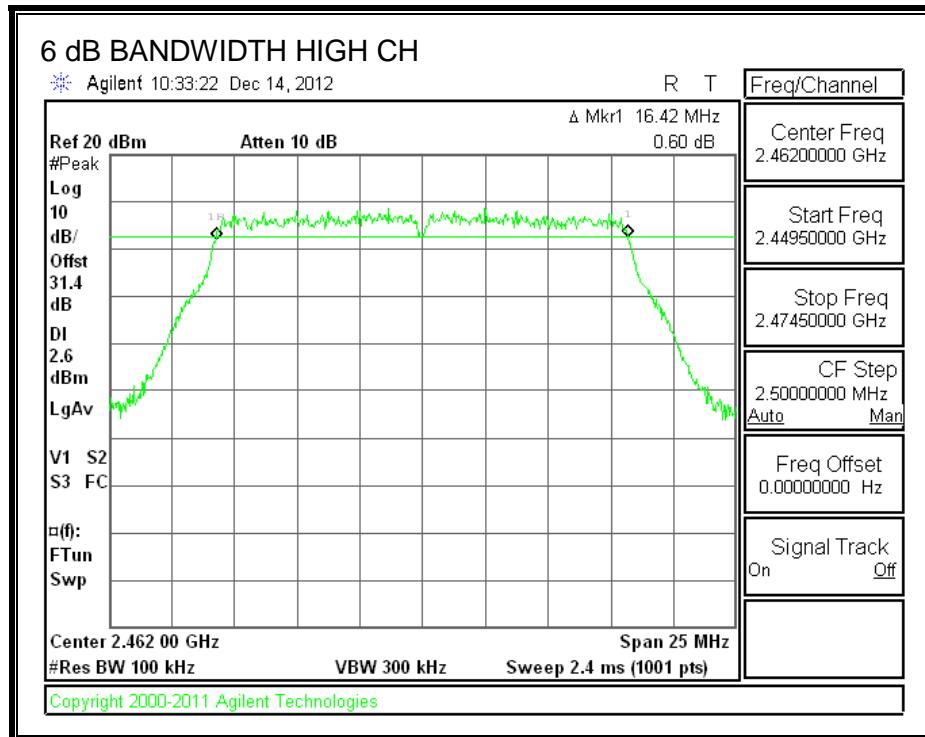



8.4.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|--------------------|------------------------|
| Low | 2412 | 16.5025 |
| Mid | 2437 | 16.4905 |
| High | 2462 | 16.4973 |

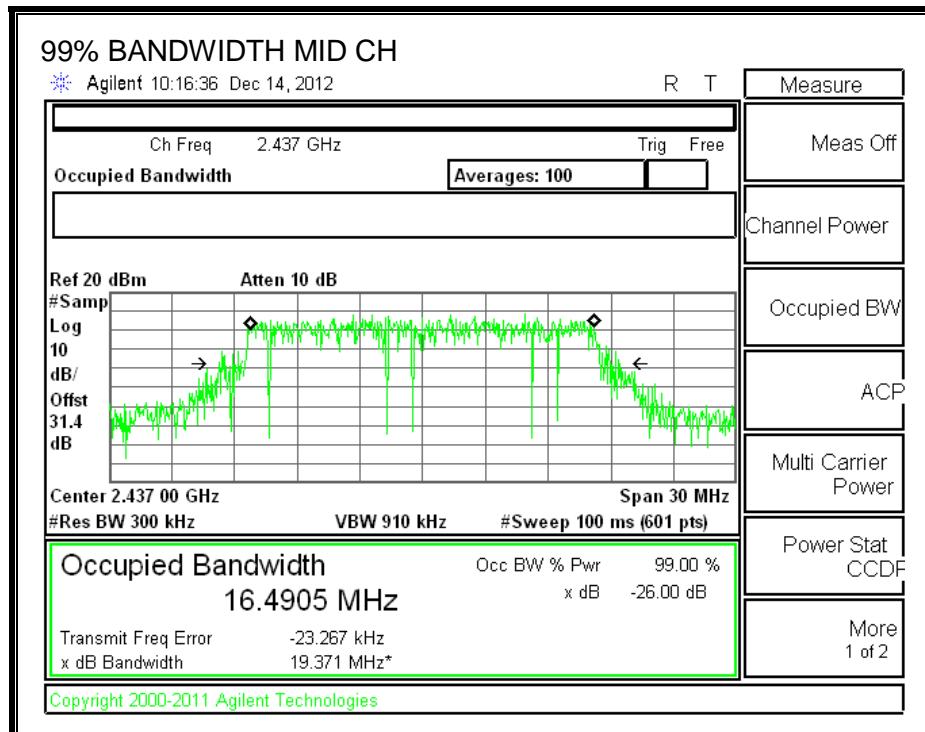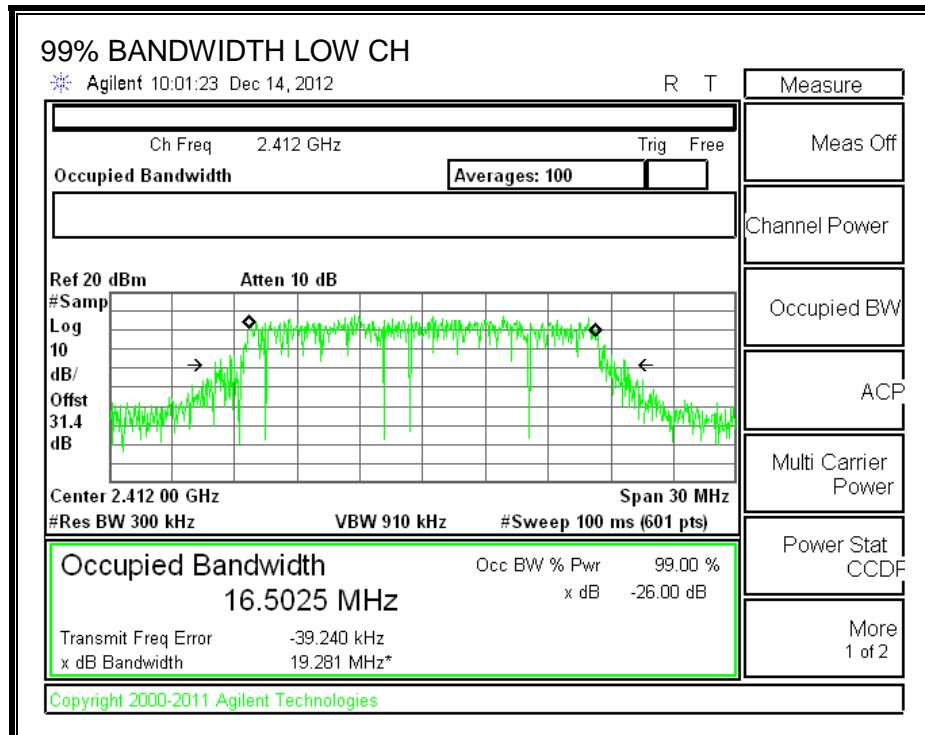99% BANDWIDTH

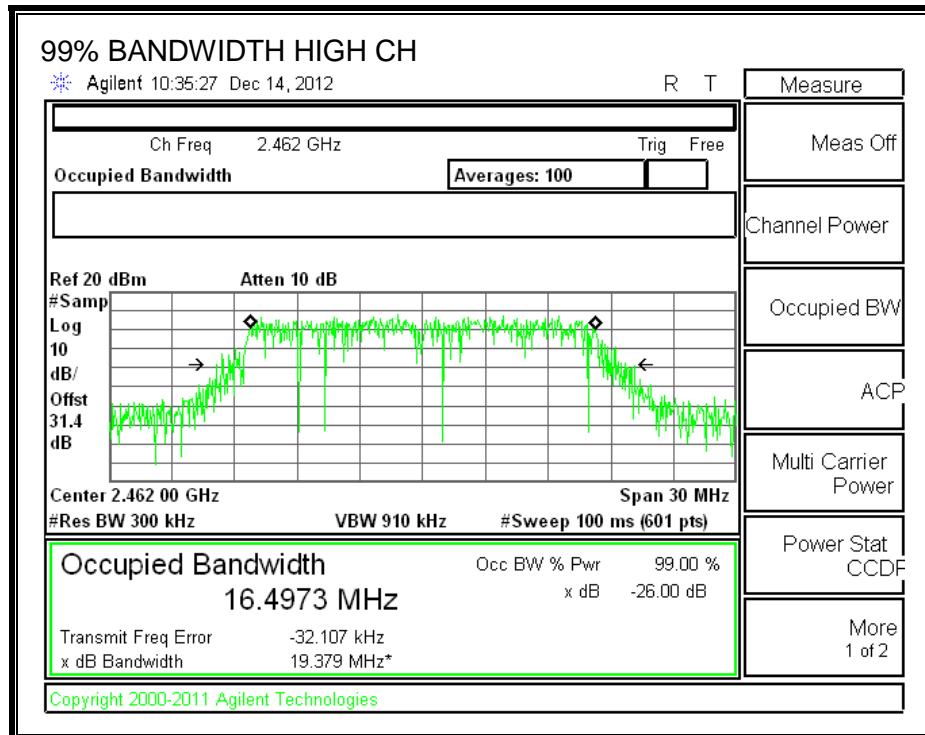

8.4.3. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | 3.10 | 30.00 | 30 | 36 | 30.00 |
| Mid | 2437 | 3.10 | 30.00 | 30 | 36 | 30.00 |
| High | 2462 | 3.10 | 30.00 | 30 | 36 | 30.00 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low1 | 2412 | 16.60 | 16.60 | 30.00 | -13.40 |
| Low2 | 2417 | 17.60 | 17.60 | 30.00 | -12.40 |
| Low3 | 2422 | 18.50 | 18.50 | 30.00 | -11.50 |
| Mid | 2437 | 23.00 | 23.00 | 30.00 | -7.00 |
| High3 | 2452 | 20.20 | 20.20 | 30.00 | -9.80 |
| High2 | 2457 | 18.10 | 18.10 | 30.00 | -11.90 |
| High1 | 2462 | 16.00 | 16.00 | 30.00 | -14.00 |

8.4.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-210 A8.2



The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


RESULTS

PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|--------------------------|----------------|----------------|
| Low | 2412 | -6.37 | 8.0 | -14.4 |
| Mid | 2437 | -6.34 | 8.0 | -14.3 |
| High | 2462 | -5.89 | 8.0 | -13.9 |

PSD, Chain 0

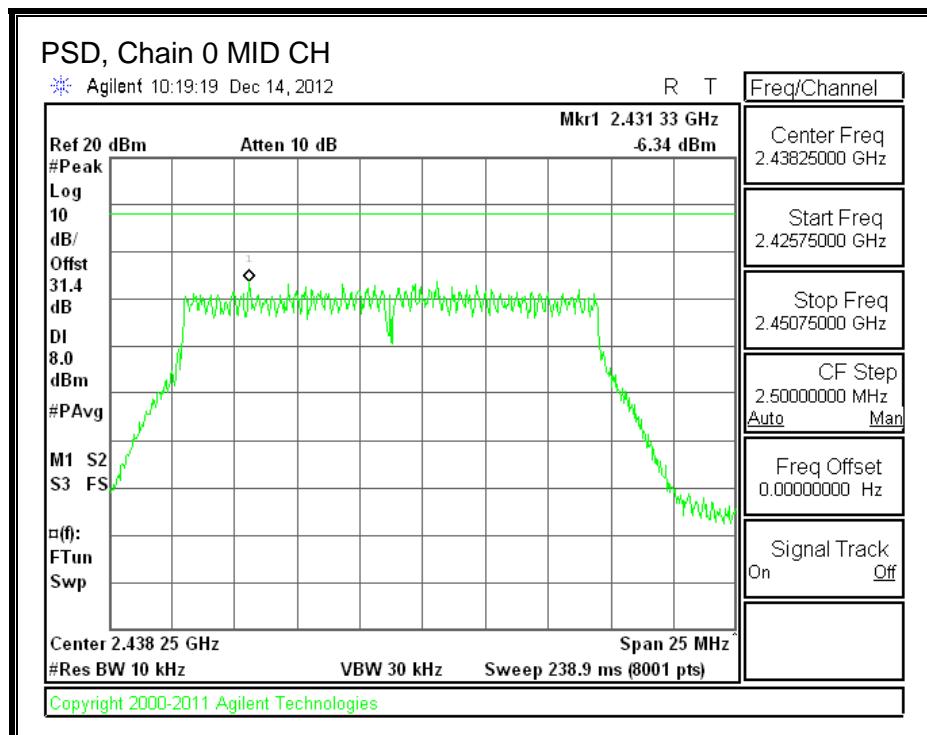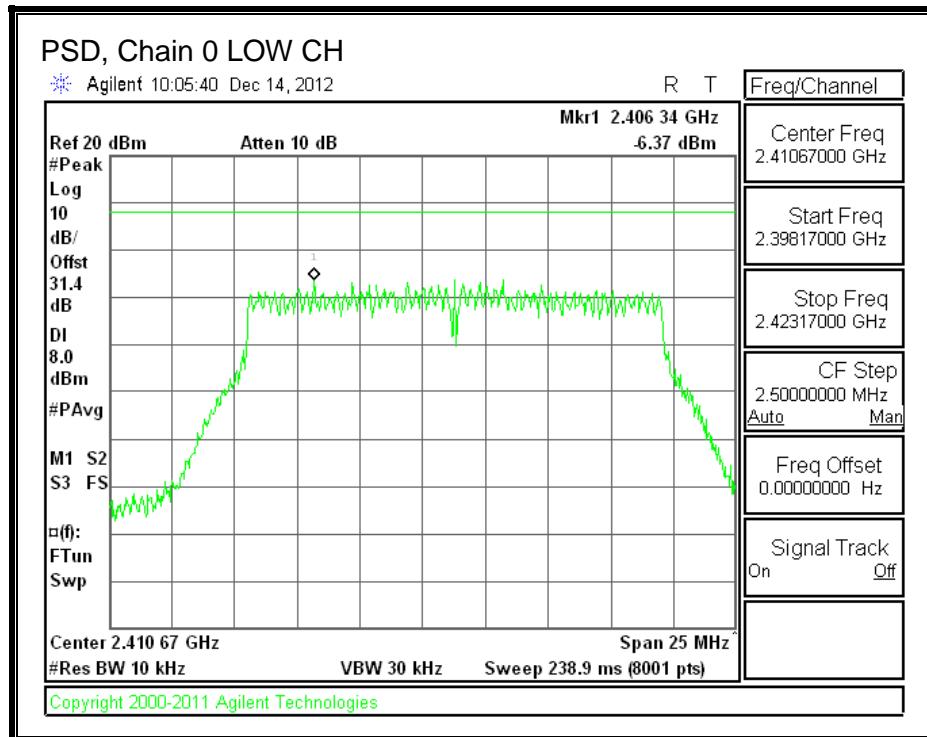

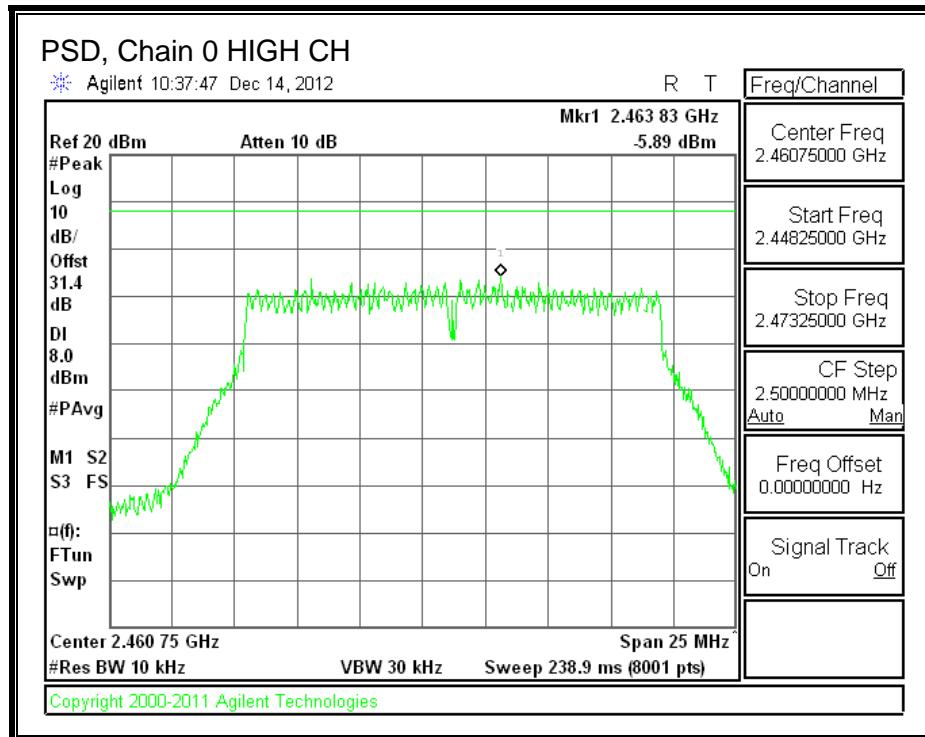

8.4.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-210 A8.5


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL

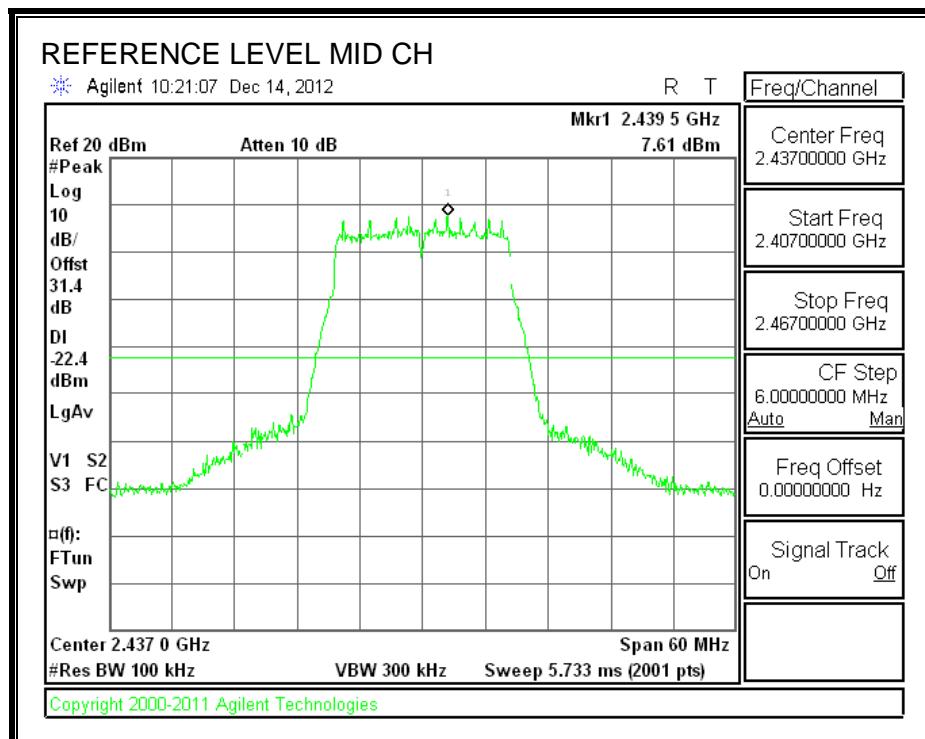



LOW CHANNEL BANDEDGE

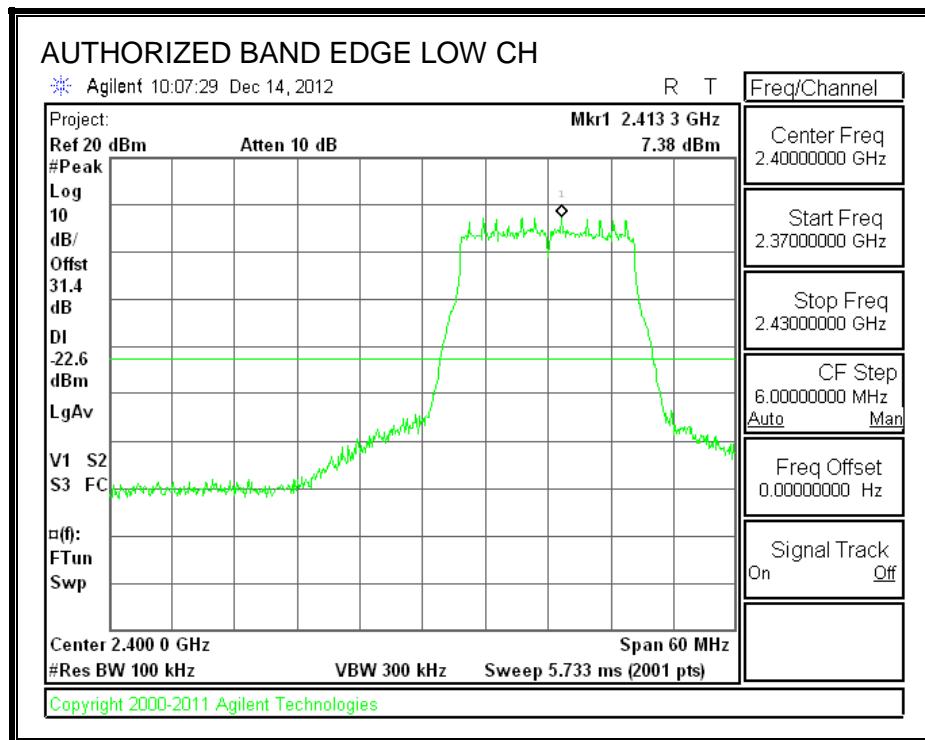


HIGH CHANNEL BANDEDGE

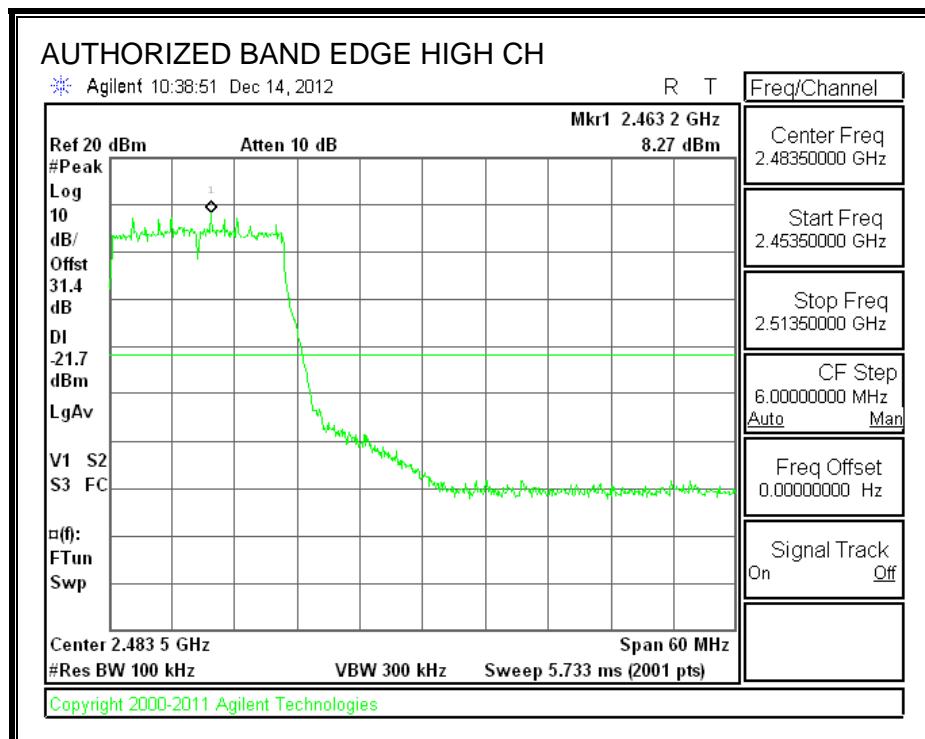

OUT-OF-BAND EMISSIONS

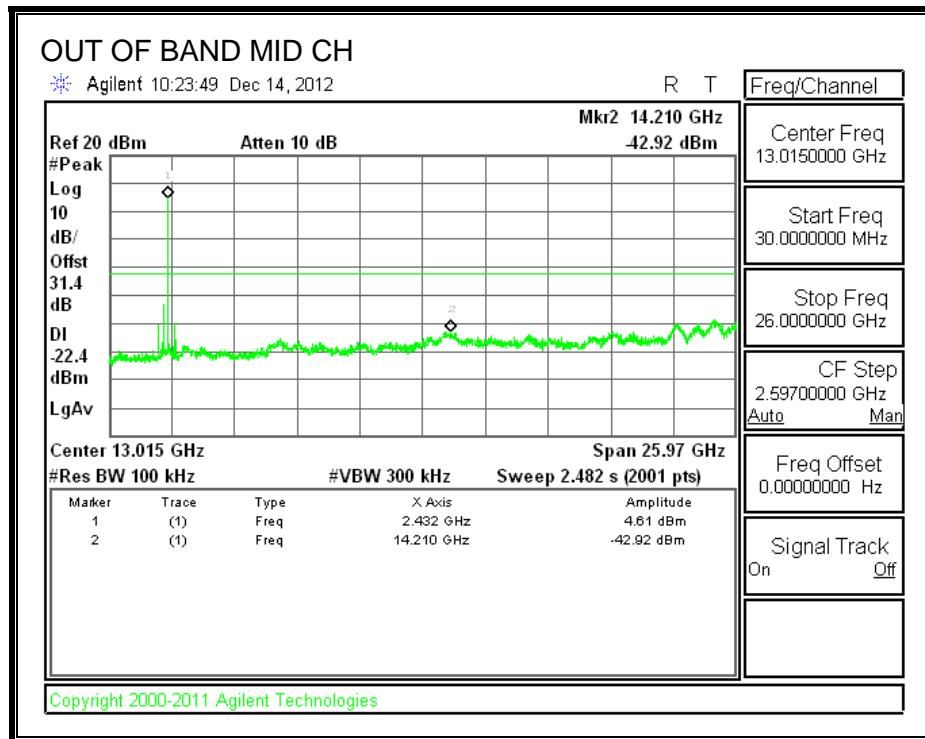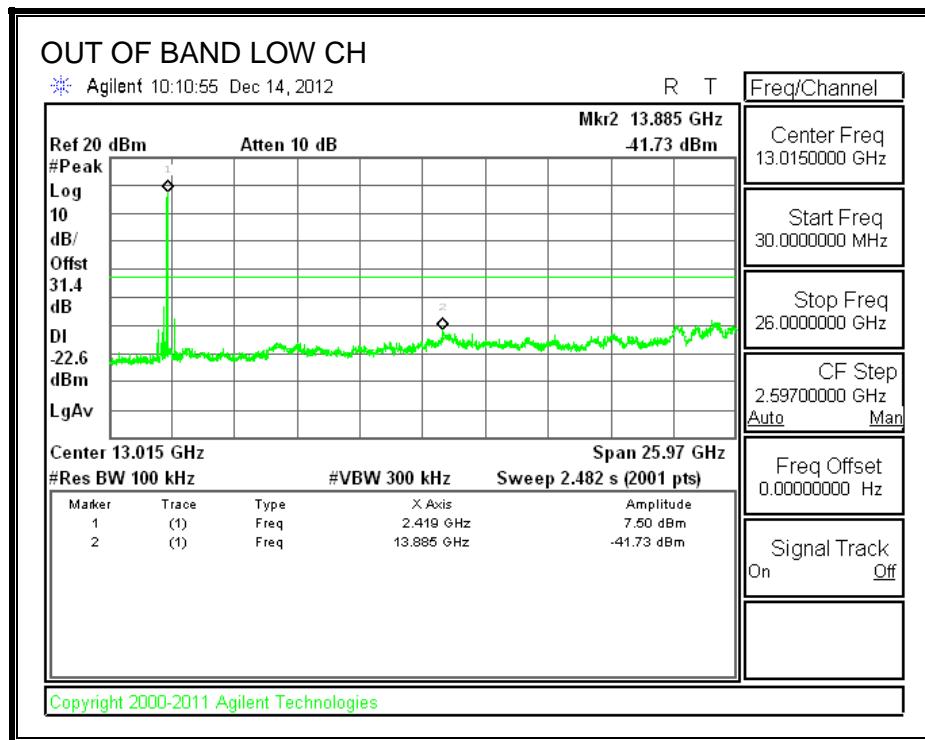

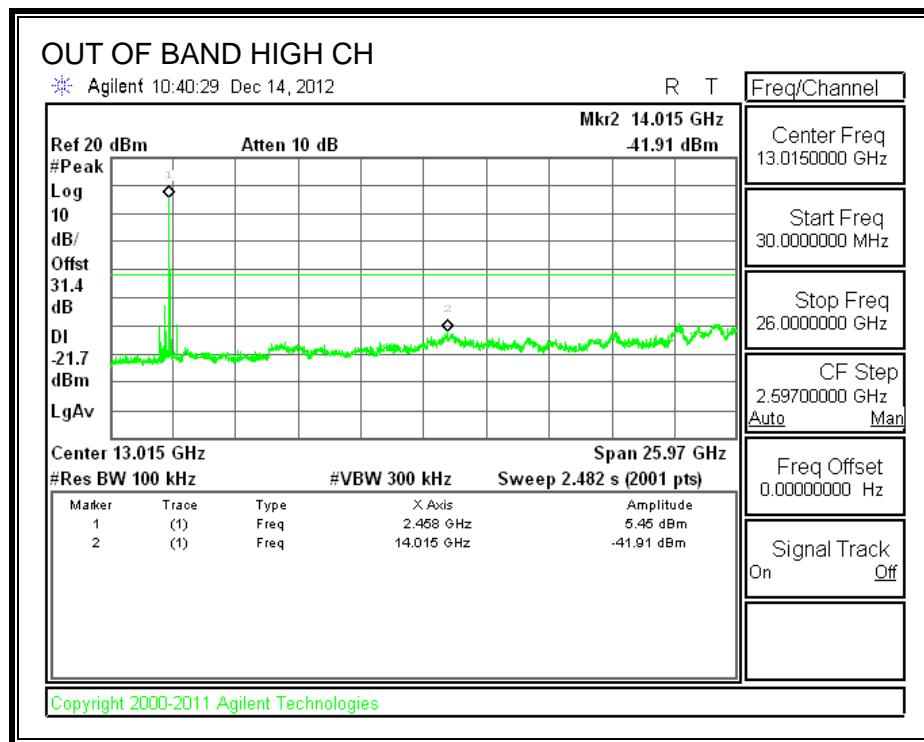

8.5. 802.11g 2TX MODE IN THE 2.4 GHz BAND

Covered by testing 802.11n HT20 2TX mode, power per chain used for 802.11n HT20 2TX mode is higher than the power per chain for 802.11g 2TX mode that the device will operate at.

8.6. 802.11g 3TX MODE IN THE 2.4 GHz BAND

Covered by testing 802.11n HT20 3TX mode, power per chain used for 802.11n HT20 3TX mode is higher than the power per chain for 802.11g 3TX mode that the device will operate at.

8.7. 802.11n HT20 1TX MODE IN THE 2.4 GHz BAND

Covered by testing 802.11g 1TX mode, power per chain used for 802.11g 1TX mode is higher than the power per chain for 802.11n HT20 mode that the device will operate at.

8.8. 802.11n HT20 BF 2TX MODE IN THE 2.4 GHz BAND

Covered by testing 11n HT20 CDD MCS0 2TX, total power across all three chains is higher than the power level the device will operate at.

8.8.1. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For output power, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|---|---|---|
| 3.00 | 3.10 | 6.06 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | 6.06 | 29.94 | 30 | 36 | 29.94 |
| Mid | 2437 | 6.06 | 29.94 | 30 | 36 | 29.94 |
| High | 2462 | 6.06 | 29.94 | 30 | 36 | 29.94 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margi (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|---------------|
| Low1 | 2412 | 16.20 | 16.00 | 19.11 | 29.94 | -10.83 |
| Low2 | 2417 | 17.70 | 17.50 | 20.61 | 29.94 | -9.33 |
| Low3 | 2422 | 18.60 | 18.40 | 21.51 | 29.94 | -8.43 |
| Mid | 2437 | 23.20 | 23.00 | 26.11 | 29.94 | -3.83 |
| High3 | 2452 | 20.25 | 20.00 | 23.14 | 29.94 | -6.80 |
| High2 | 2457 | 18.25 | 18.10 | 21.19 | 29.94 | -8.75 |
| High1 | 2462 | 16.60 | 16.40 | 19.51 | 29.94 | -10.43 |

8.9. 802.11n HT20 BF 3TX MODE IN THE 2.4 GHz BAND

Covered by testing 11n HT20 CCD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

8.9.1. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 3.00 | 3.00 | 3.10 | 7.80 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | 7.80 | 28.20 | 30 | 36 | 28.20 |
| Mid | 2437 | 7.80 | 28.20 | 30 | 36 | 28.20 |
| High | 2462 | 7.80 | 28.20 | 30 | 36 | 28.20 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low1 | 2412 | 14.90 | 15.50 | 15.30 | 20.01 | 28.20 | -8.19 |
| Low2 | 2417 | 15.90 | 16.30 | 16.15 | 20.89 | 28.20 | -7.31 |
| Low3 | 2422 | 16.90 | 17.25 | 17.05 | 21.84 | 28.20 | -6.36 |
| Mid | 2437 | 21.90 | 22.50 | 22.30 | 27.01 | 28.20 | -1.19 |
| High3 | 2452 | 18.45 | 18.86 | 18.60 | 23.41 | 28.20 | -4.79 |
| High2 | 2457 | 16.90 | 17.30 | 17.05 | 21.86 | 28.20 | -6.34 |
| High1 | 2462 | 15.00 | 15.80 | 15.50 | 20.22 | 28.20 | -7.98 |

8.10. 802.11n HT20 CDD 2TX MODE IN THE 2.4 GHz BAND

8.10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


| Channel | Frequency (MHz) | 6 dB BW Chain 0 (MHz) | 6 dB BW Chain 1 (MHz) | Minimum Limit (MHz) |
|---------|--------------------|-----------------------------|-----------------------------|---------------------------|
| Low | 2412 | 17.58 | 17.71 | 0.5 |
| Mid | 2437 | 17.54 | 17.67 | 0.5 |
| High | 2462 | 17.58 | 17.71 | 0.5 |



6 dB BANDWIDTH, Chain 0

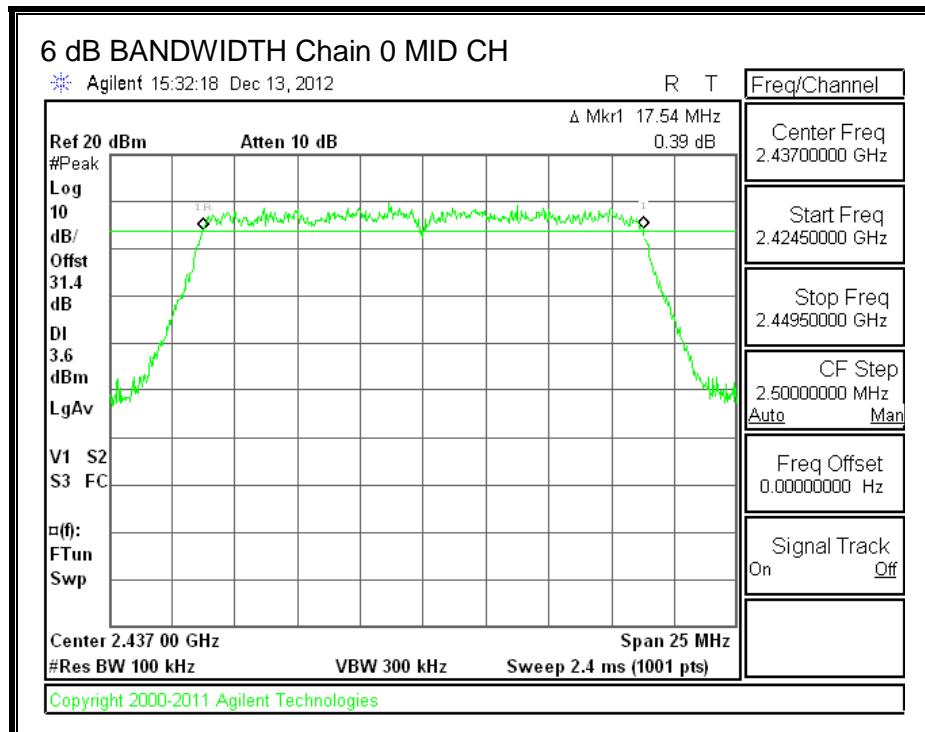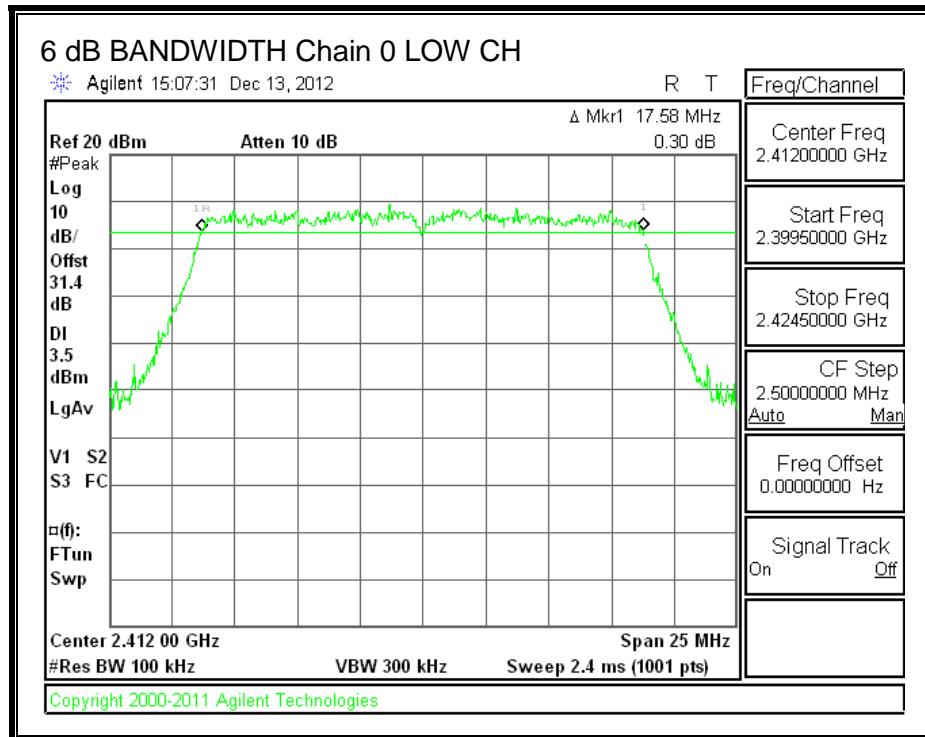

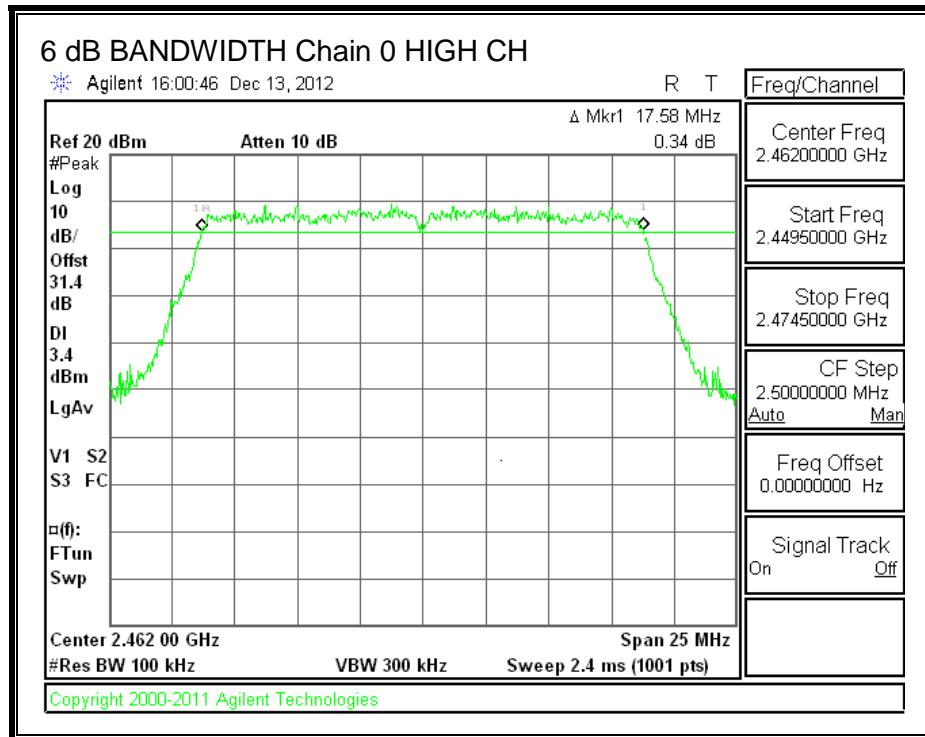

6 dB BANDWIDTH, Chain 1

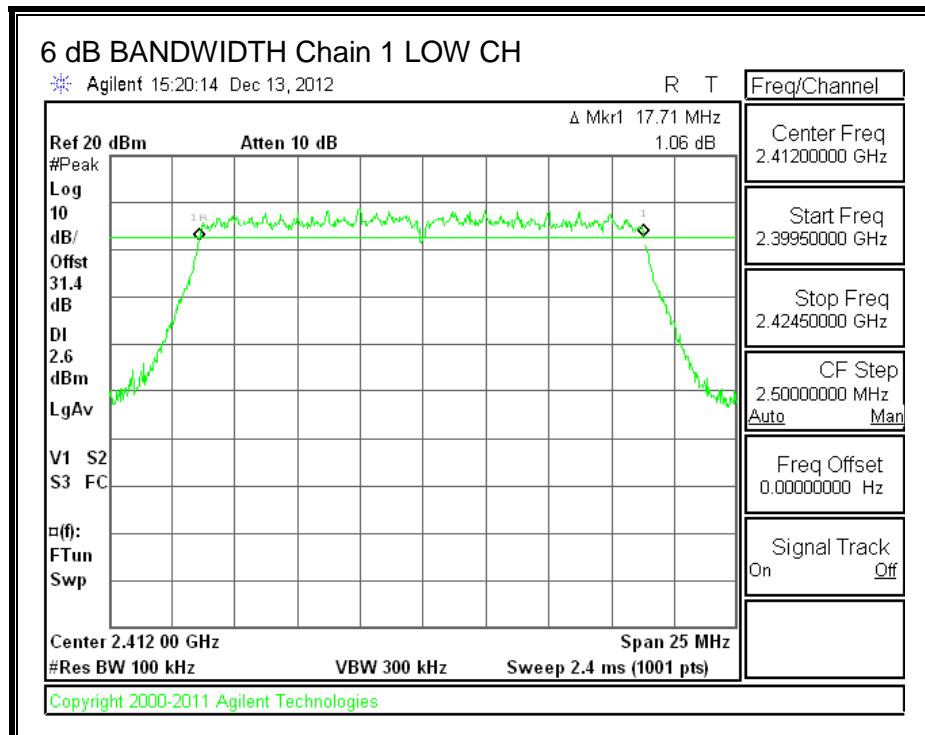

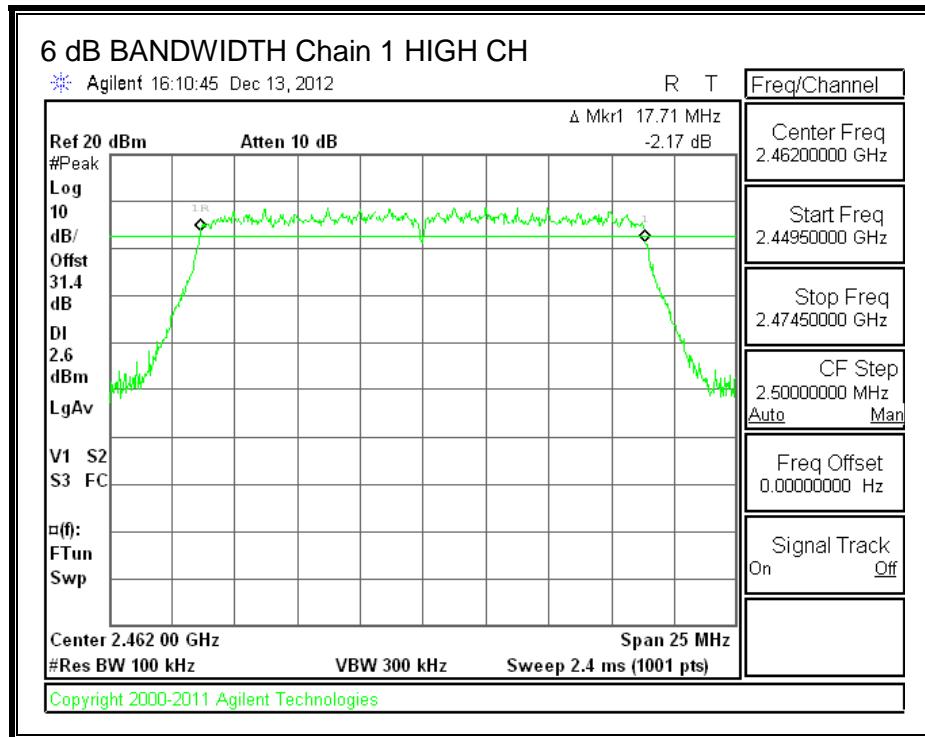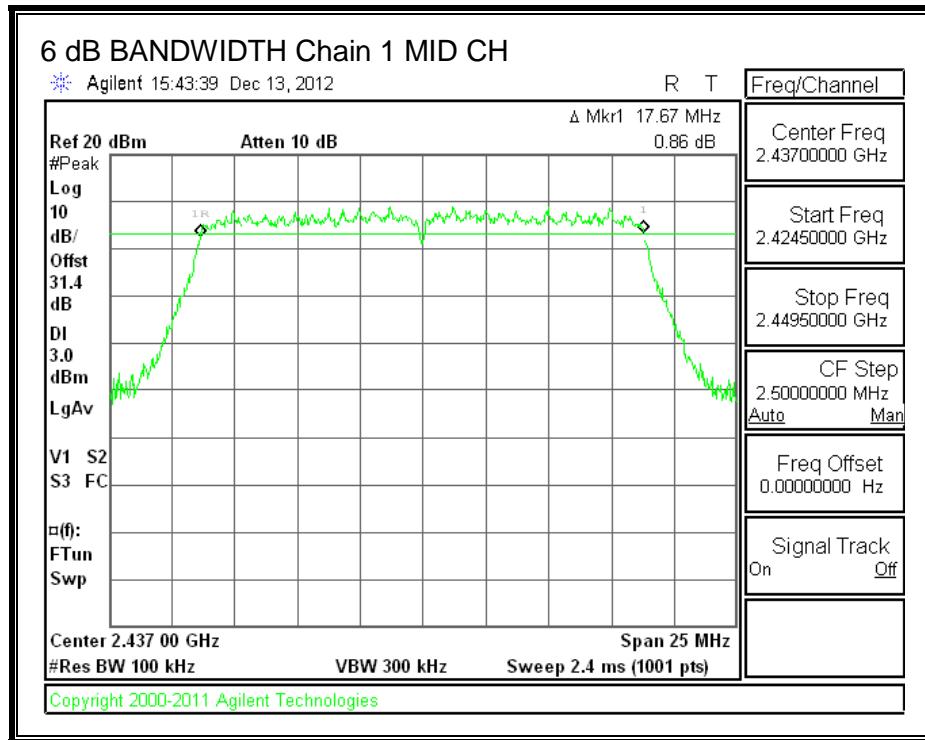

8.10.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) |
|---------|--------------------|----------------------------|----------------------------|
| Low | 2412 | 17.6853 | 17.6850 |
| Mid | 2437 | 17.6619 | 17.6751 |
| High | 2462 | 17.6605 | 17.6722 |



99% BANDWIDTH, Chain 0

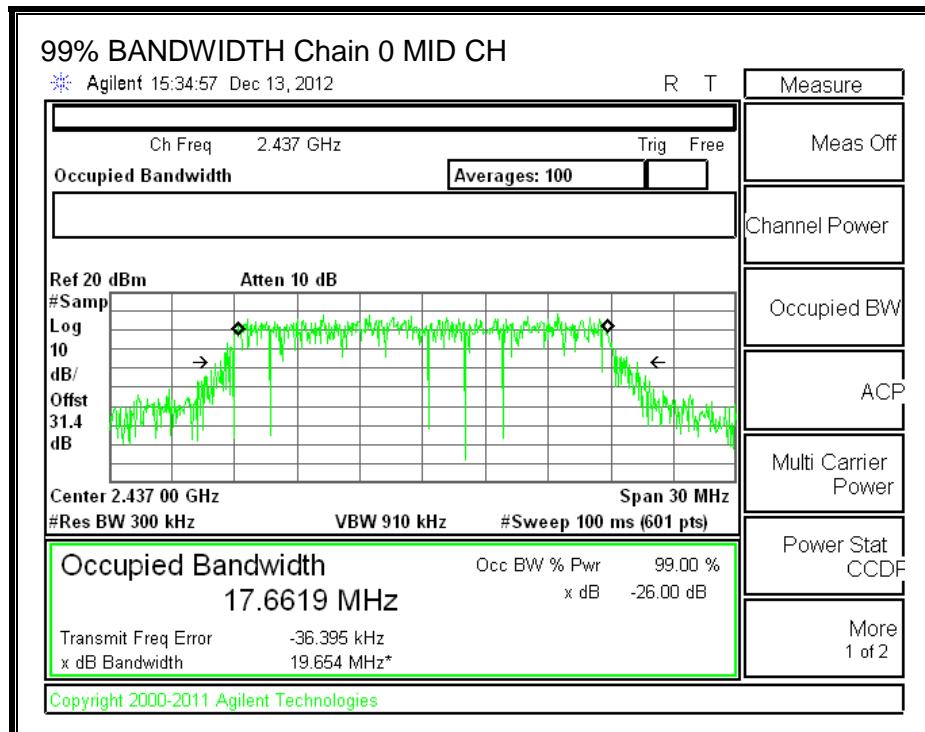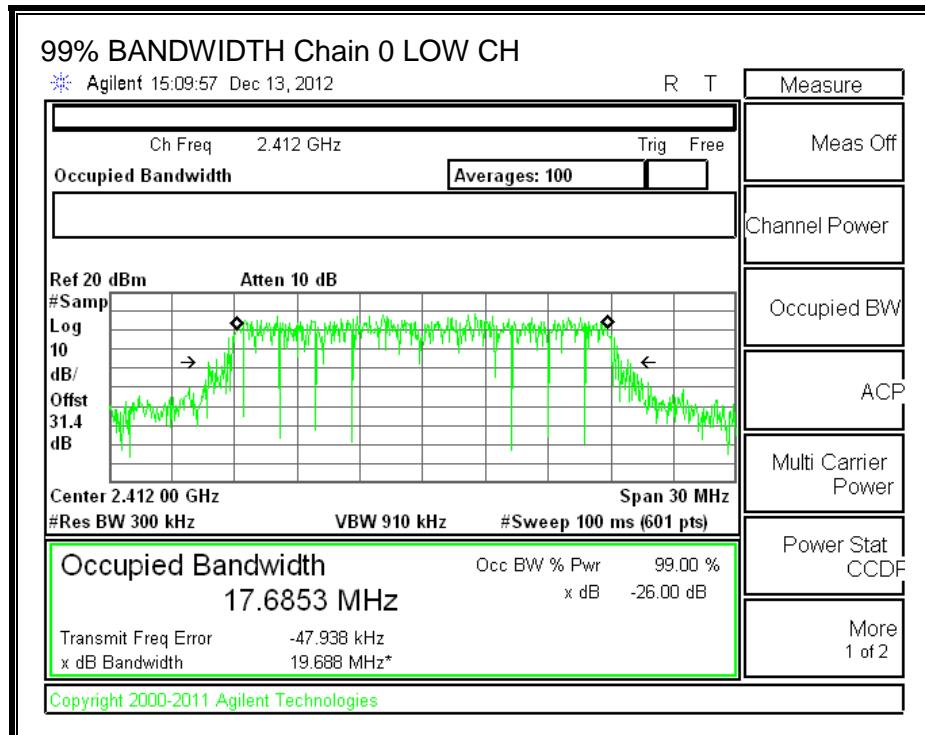

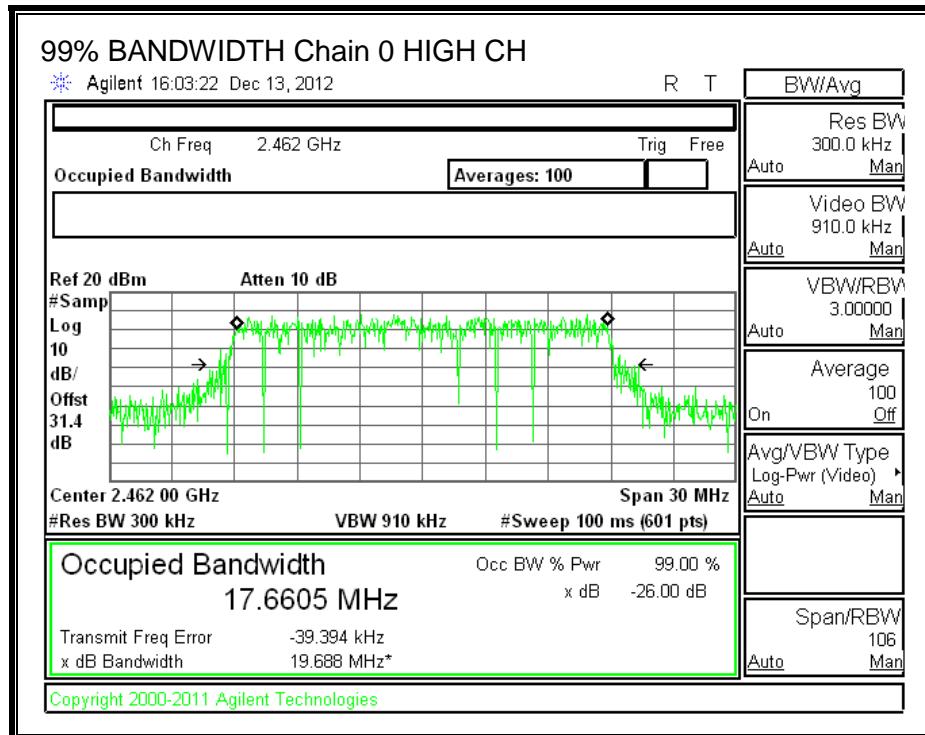

99% BANDWIDTH, Chain 1

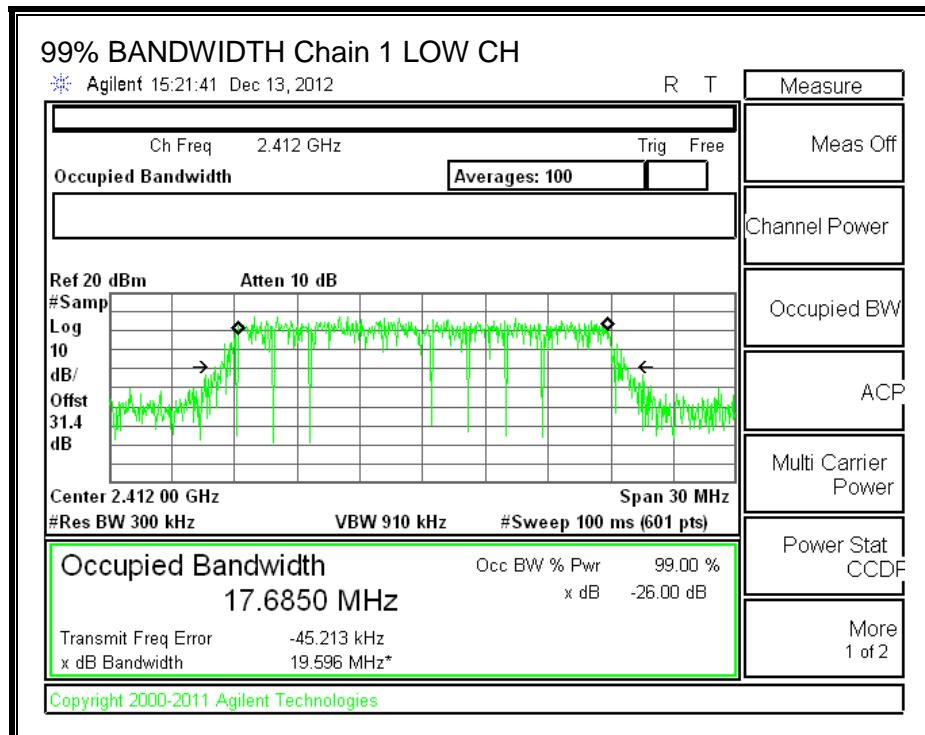

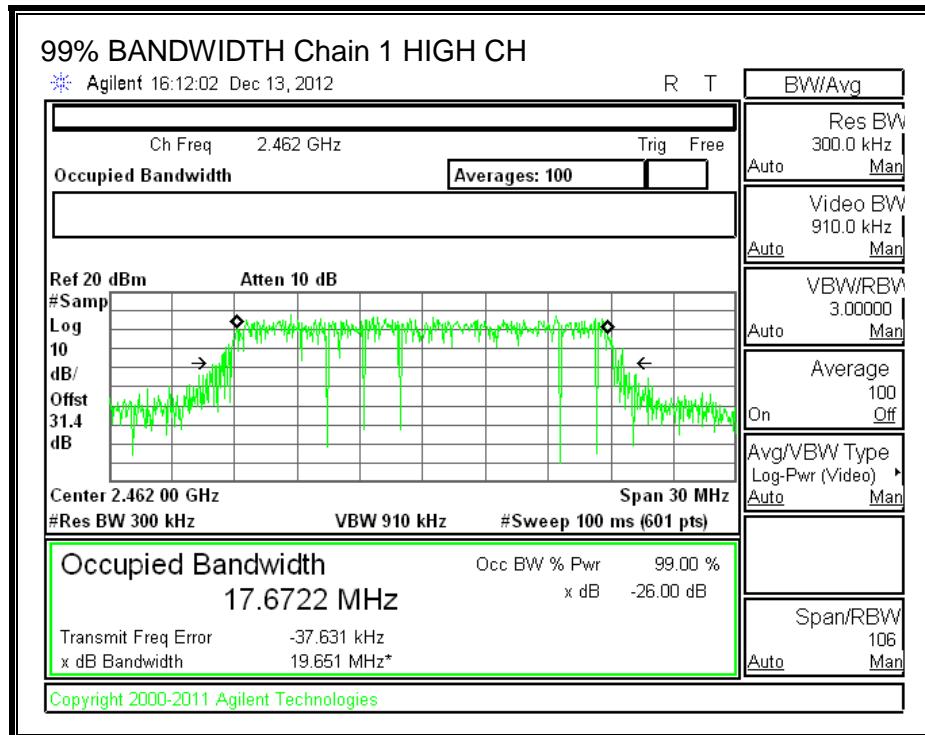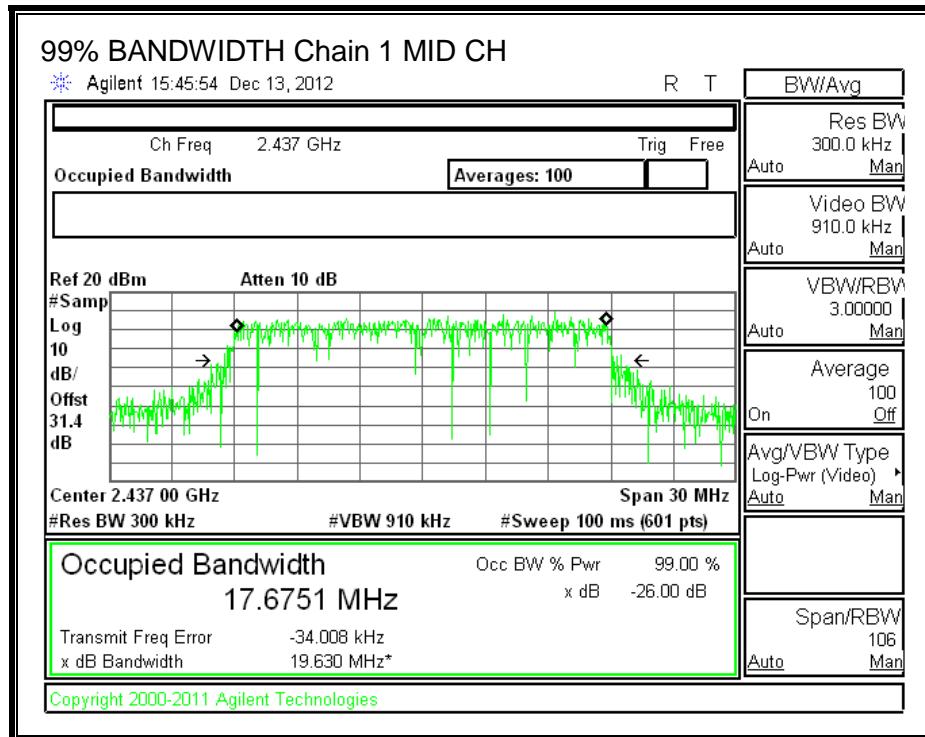

8.10.3. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna | Chain 1 Antenna | Uncorrelated Chains Directional |
|--------------------|--------------------|------------------------------------|
| Gain (dBi) | Gain (dBi) | Gain (dBi) |
| 3.00 | 3.10 | 3.05 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | 3.05 | 30.00 | 30 | 36 | 30.00 |
| Mid | 2437 | 3.05 | 30.00 | 30 | 36 | 30.00 |
| High | 2462 | 3.05 | 30.00 | 30 | 36 | 30.00 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margi (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|---------------|
| Low1 | 2412 | 16.20 | 16.00 | 19.11 | 30.00 | -10.89 |
| Low2 | 2417 | 17.70 | 17.50 | 20.61 | 30.00 | -9.39 |
| Low3 | 2422 | 18.60 | 18.40 | 21.51 | 30.00 | -8.49 |
| Mid | 2437 | 23.20 | 23.00 | 26.11 | 30.00 | -3.89 |
| High3 | 2452 | 20.25 | 20.00 | 23.14 | 30.00 | -6.86 |
| High2 | 2457 | 18.25 | 18.10 | 21.19 | 30.00 | -8.81 |
| High1 | 2462 | 16.60 | 16.40 | 19.51 | 30.00 | -10.49 |

8.10.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-210 A8.2



The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


RESULTS

PSD Results


| Channel | Frequency (MHz) | Chain 0 Meas (dBm) | Chain 1 Meas (dBm) | Total PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|--------------------------|--------------------------|-----------------------|----------------|----------------|
| Low | 2412 | -6.46 | -6.91 | -3.67 | 8.0 | -11.7 |
| Mid | 2437 | -6.45 | -6.58 | -3.50 | 8.0 | -11.5 |
| High | 2462 | -5.45 | -5.48 | -2.45 | 8.0 | -10.5 |



PSD, Chain 0

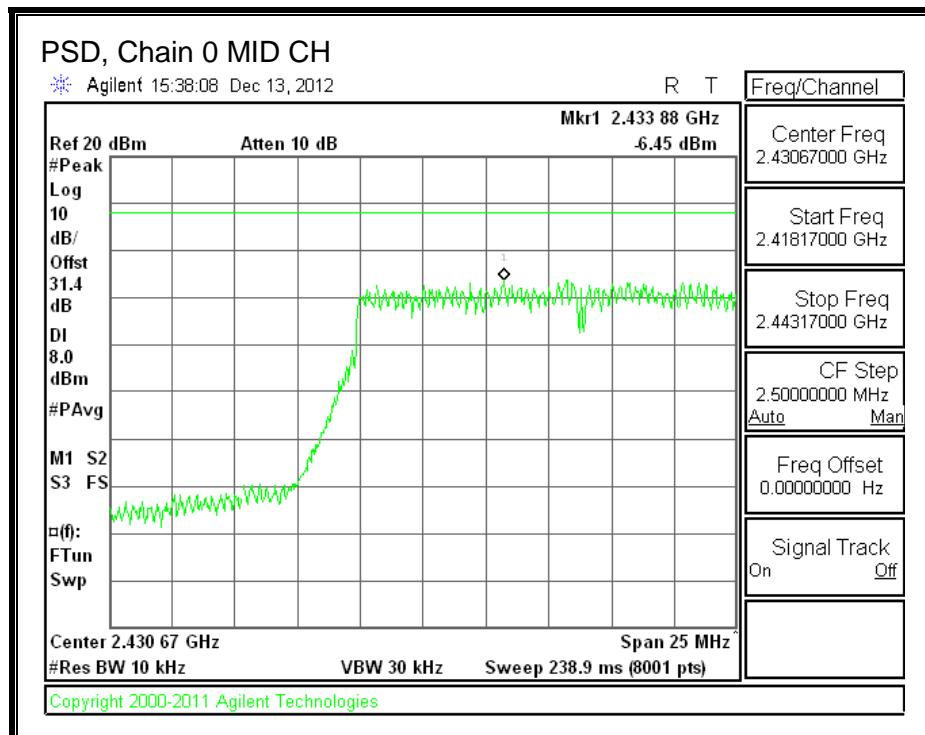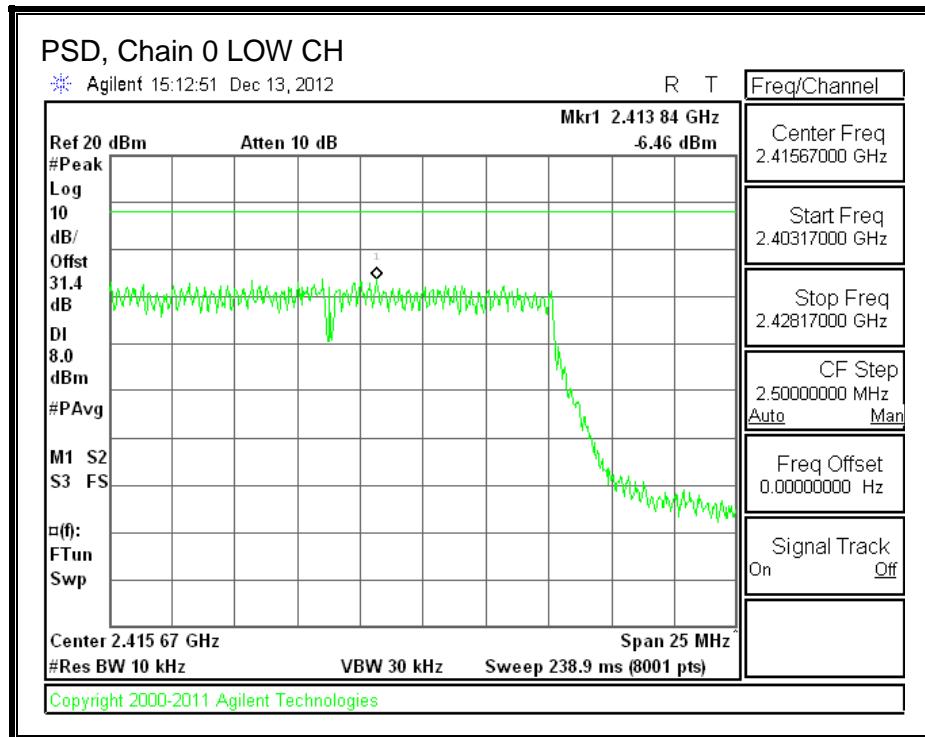

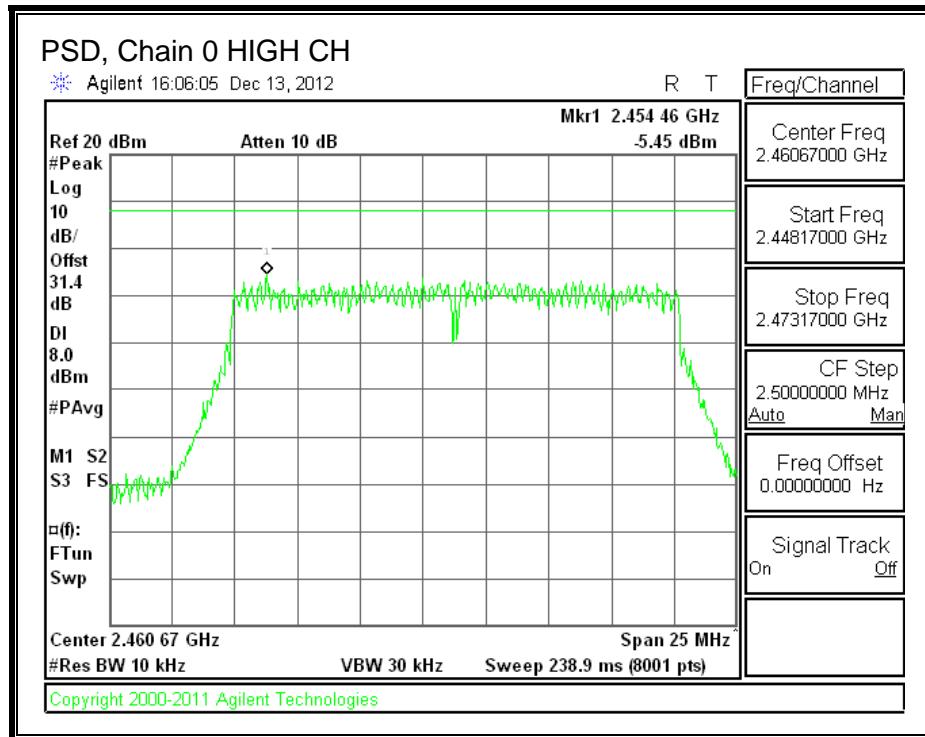

PSD, Chain 1

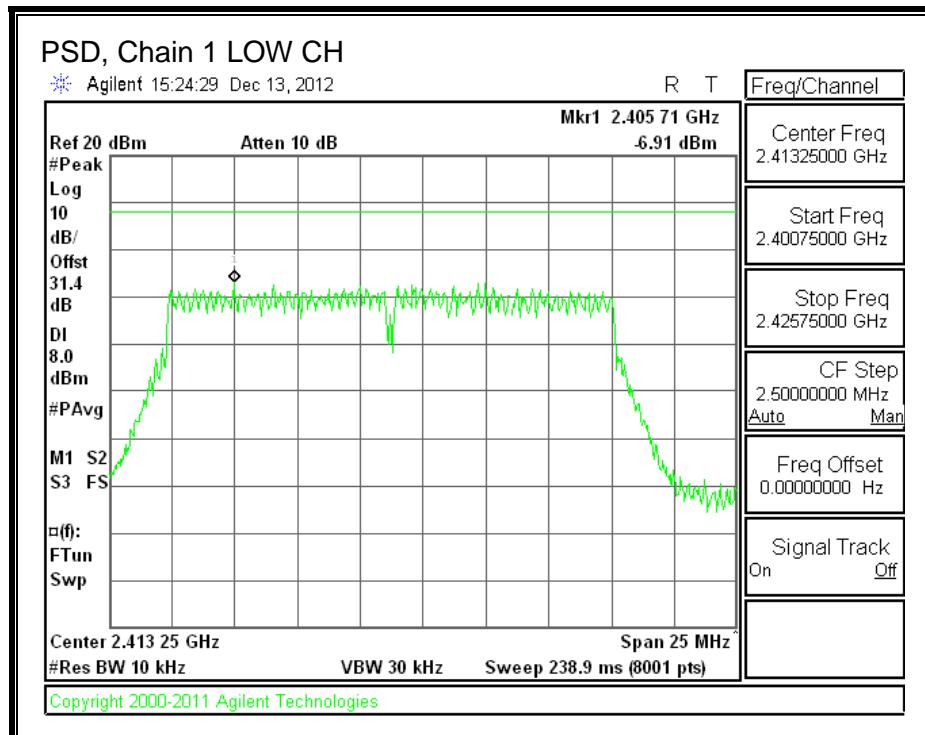

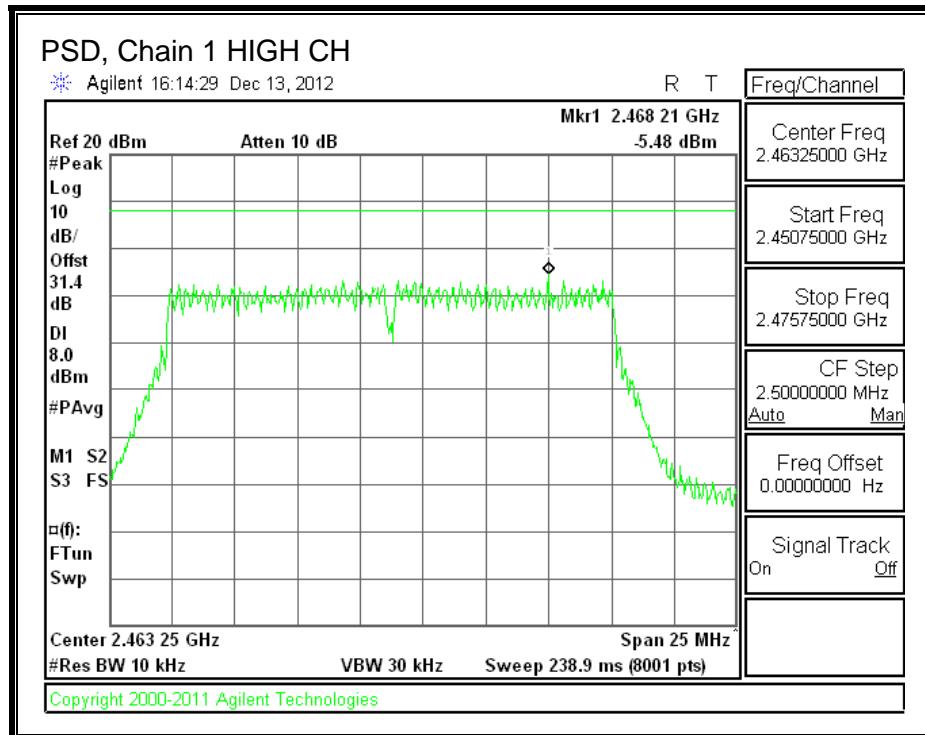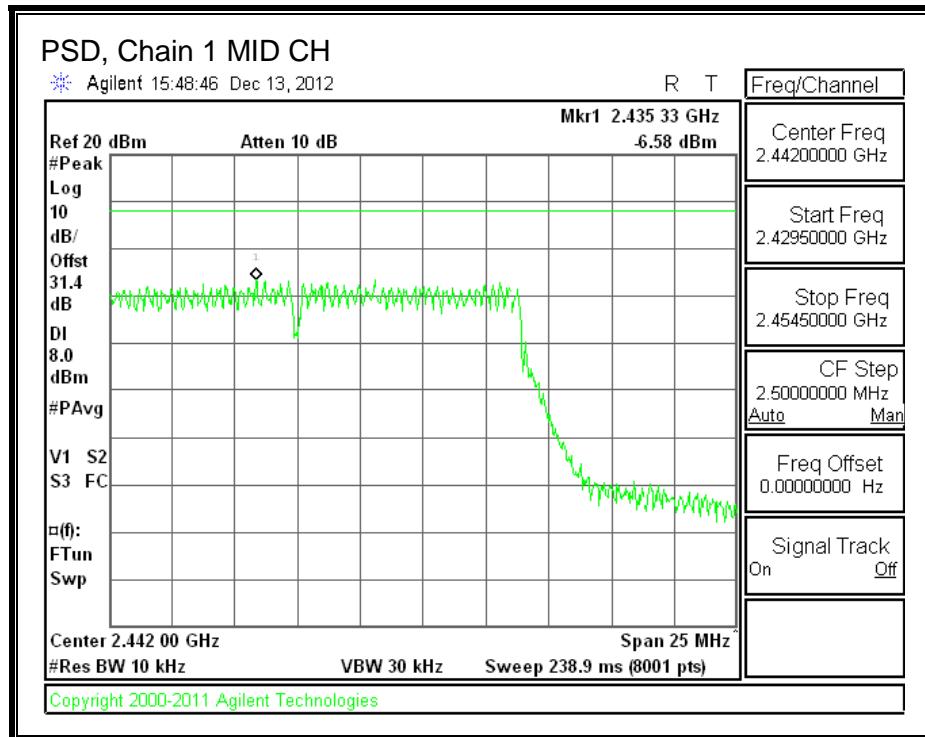

8.10.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-210 A8.5


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL, Chain 0

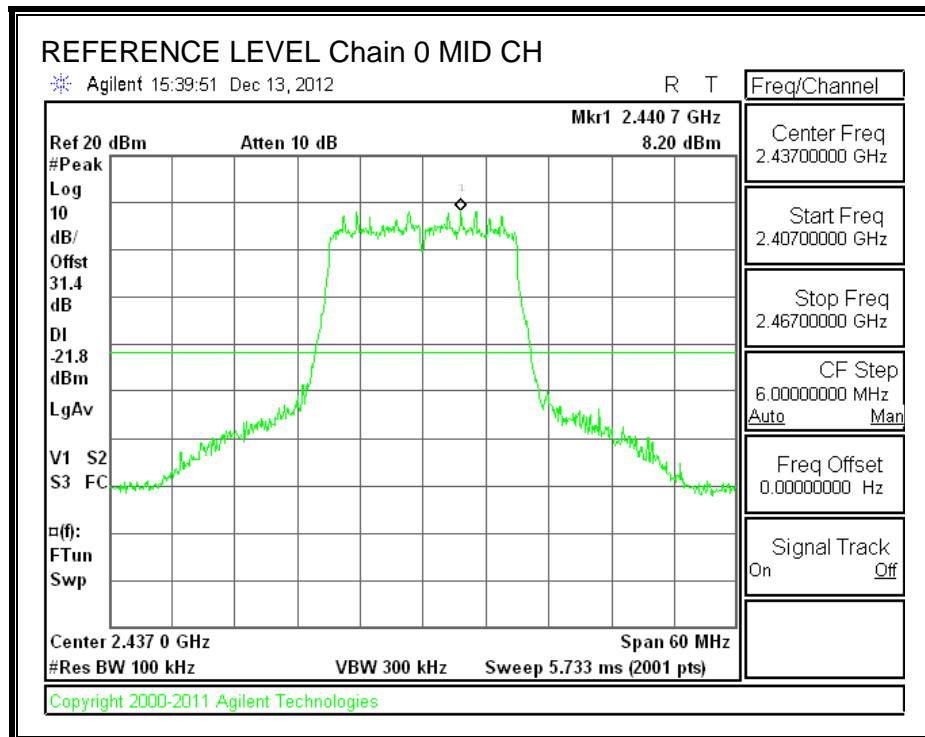



LOW CHANNEL BANDEDGE, Chain 0

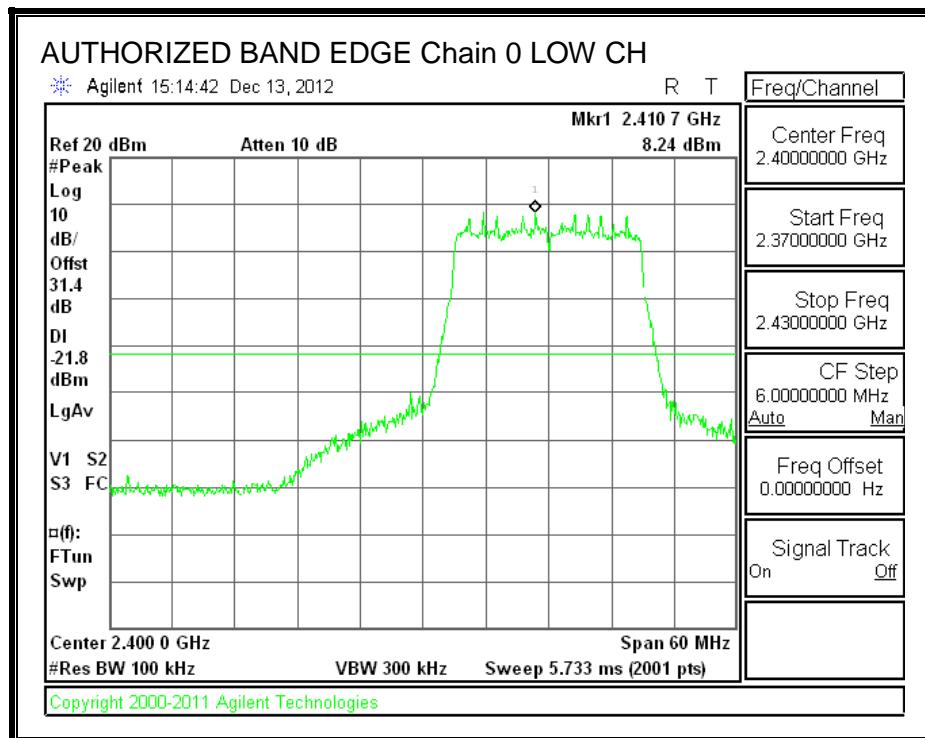


HIGH CHANNEL BANDEDGE, Chain 0

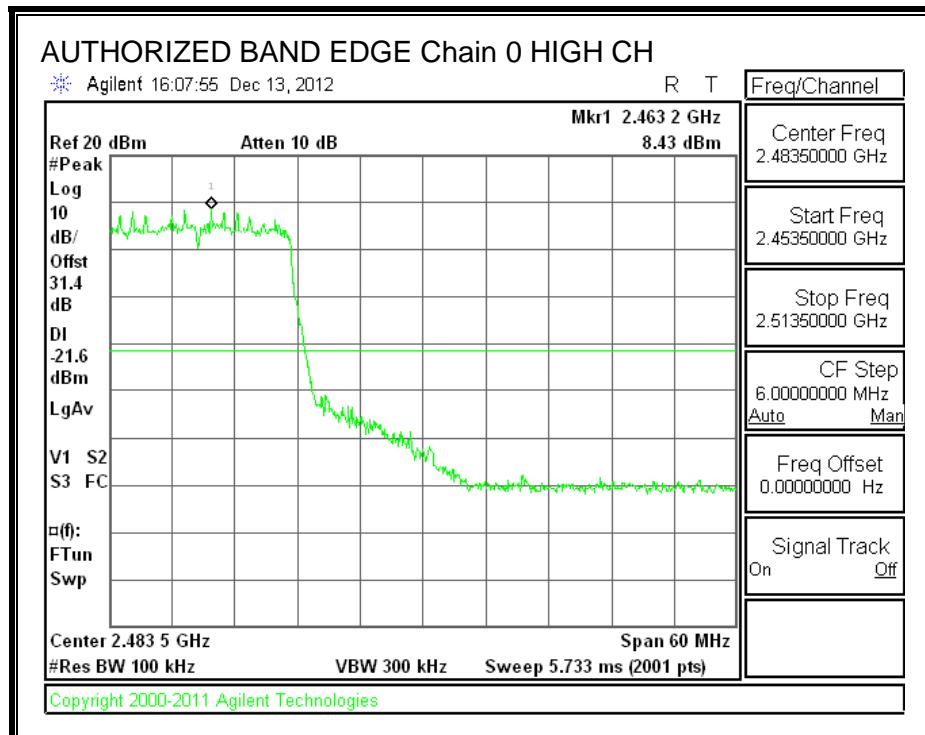


OUT-OF-BAND EMISSIONS, Chain 0

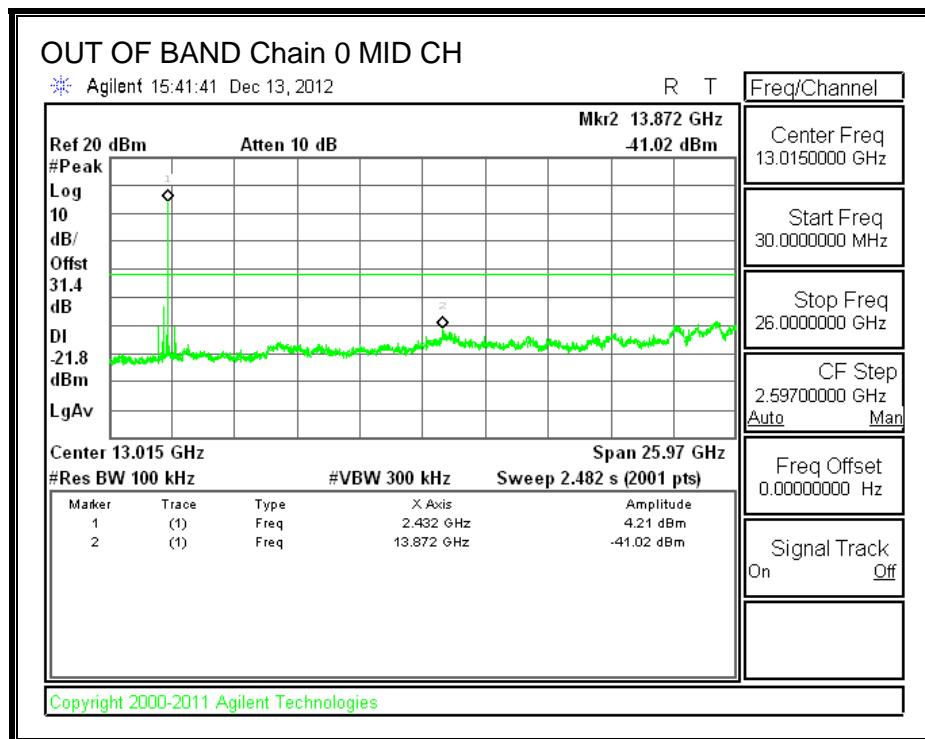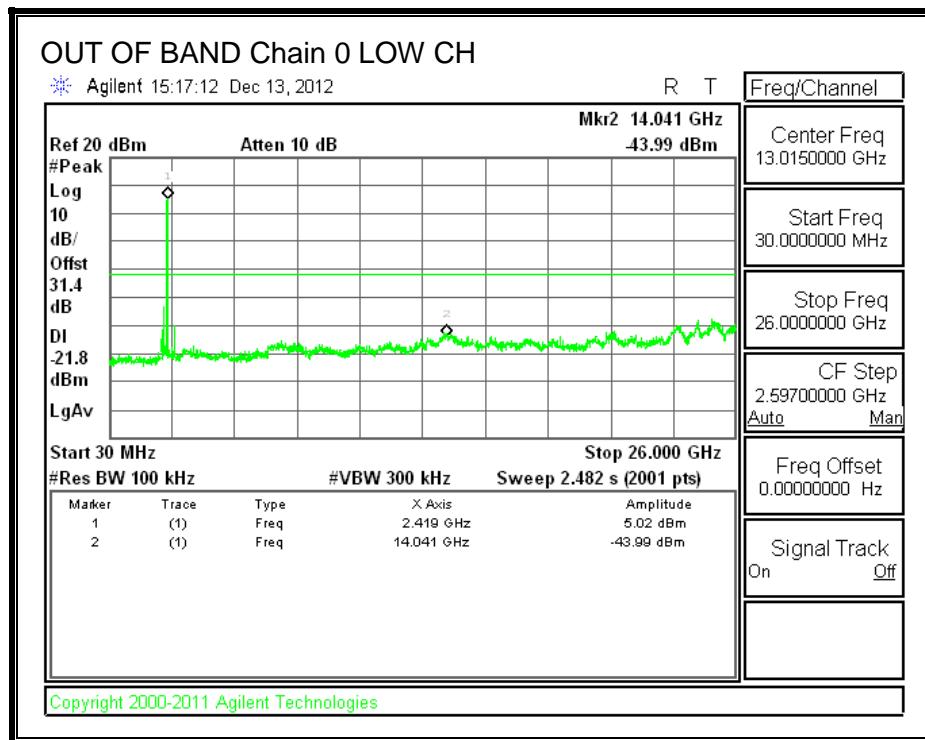


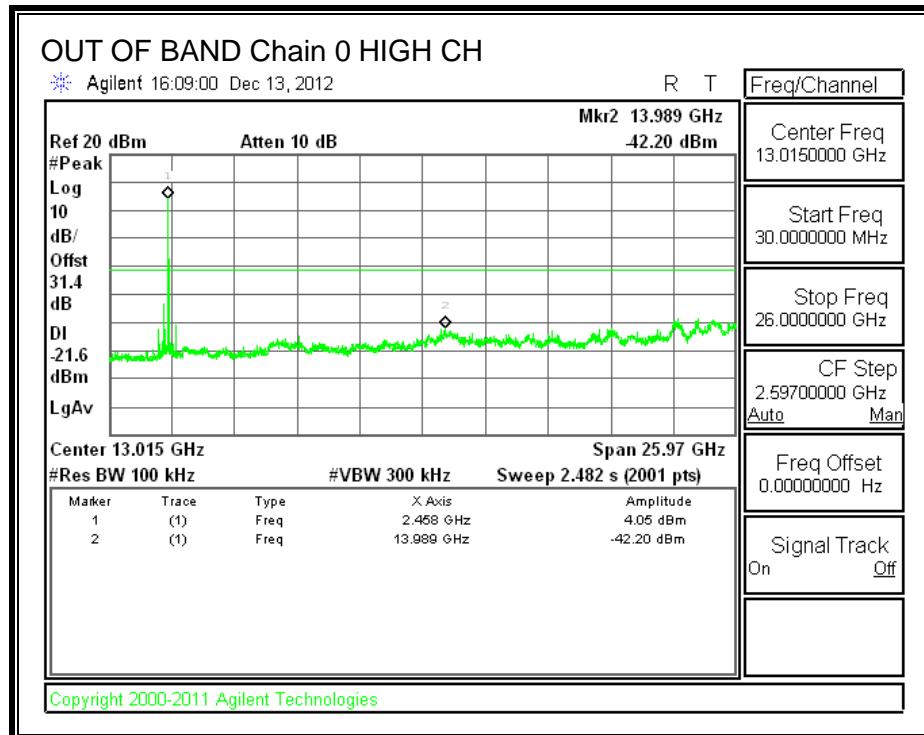


IN-BAND REFERENCE LEVEL, Chain 1


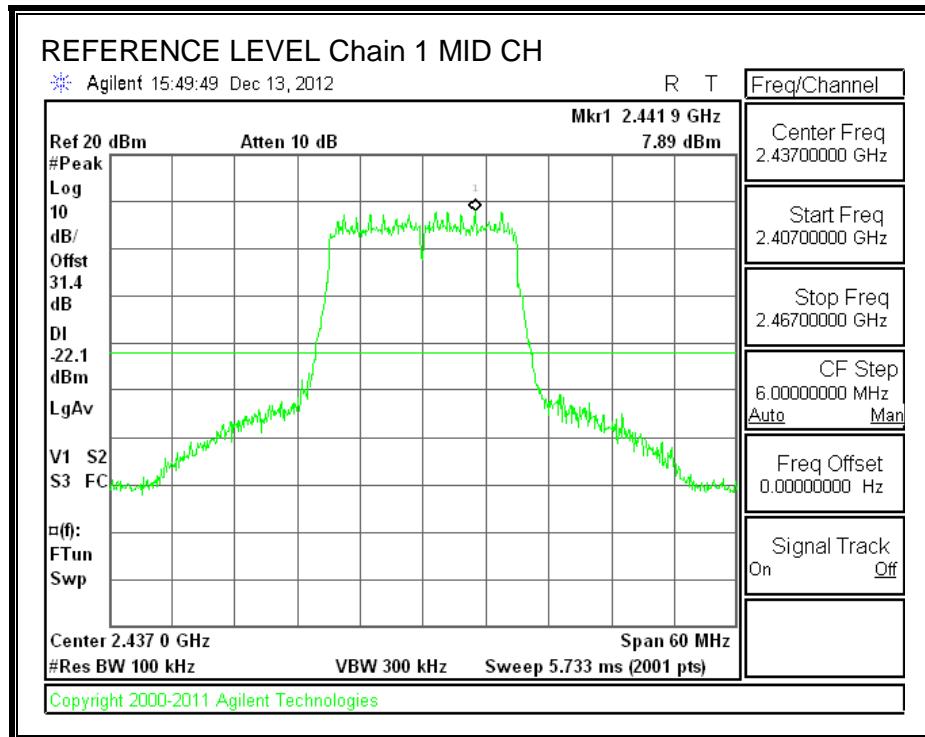



LOW CHANNEL BANDEDGE, Chain 1

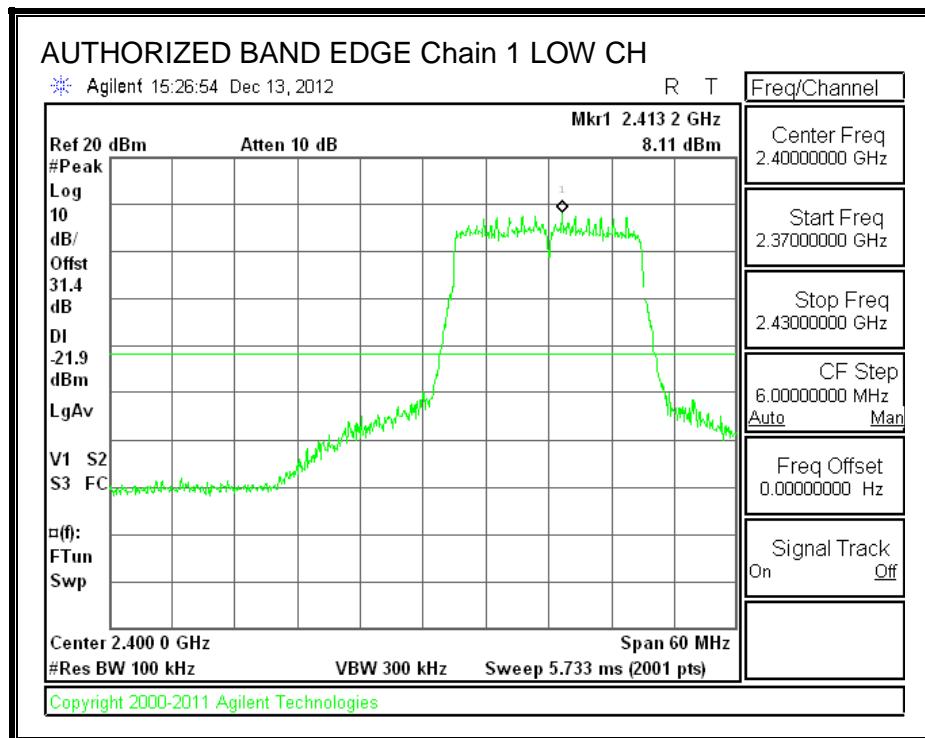

HIGH CHANNEL BANDEDGE, Chain 1

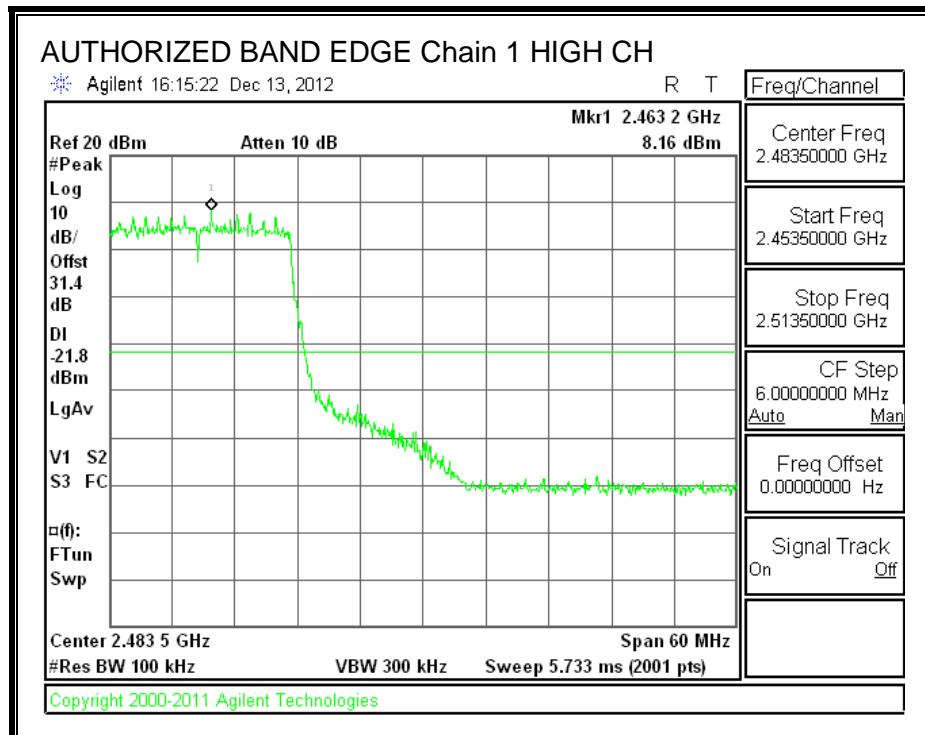

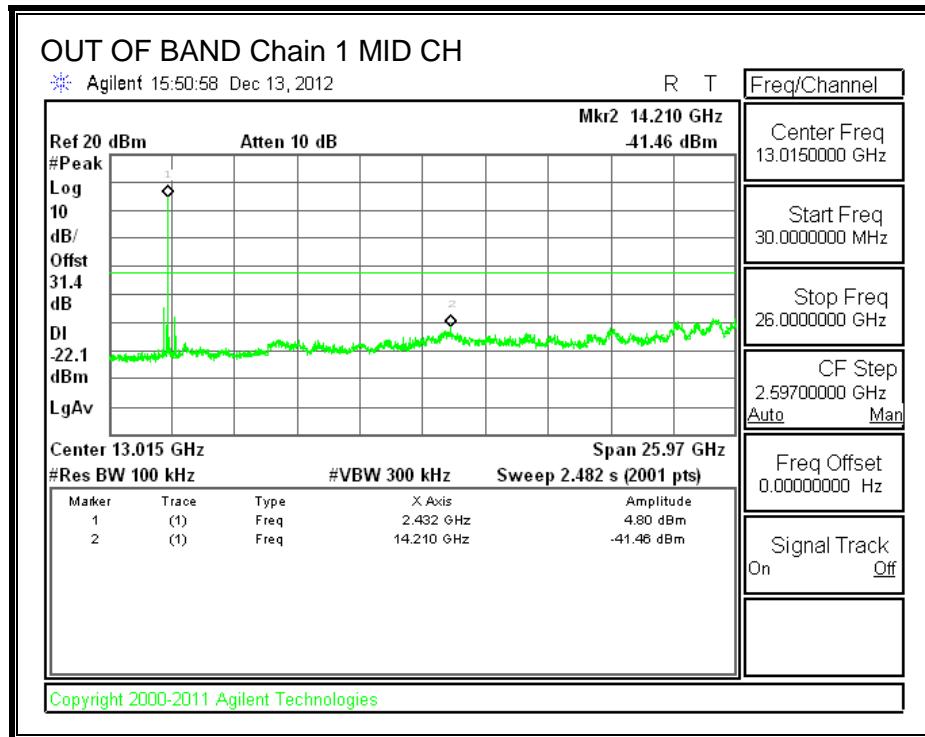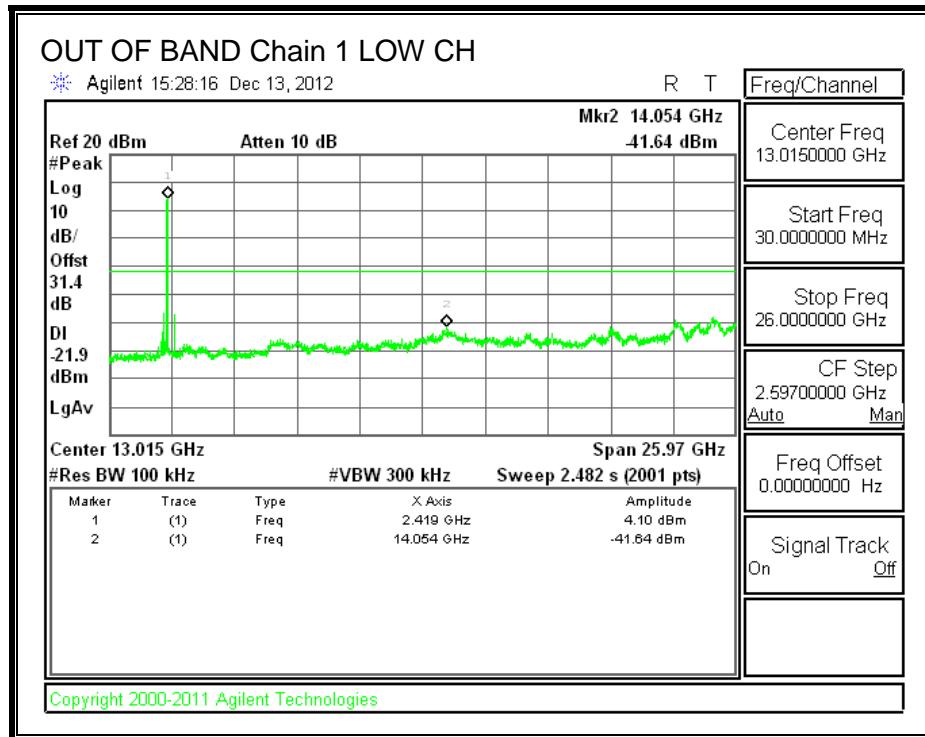

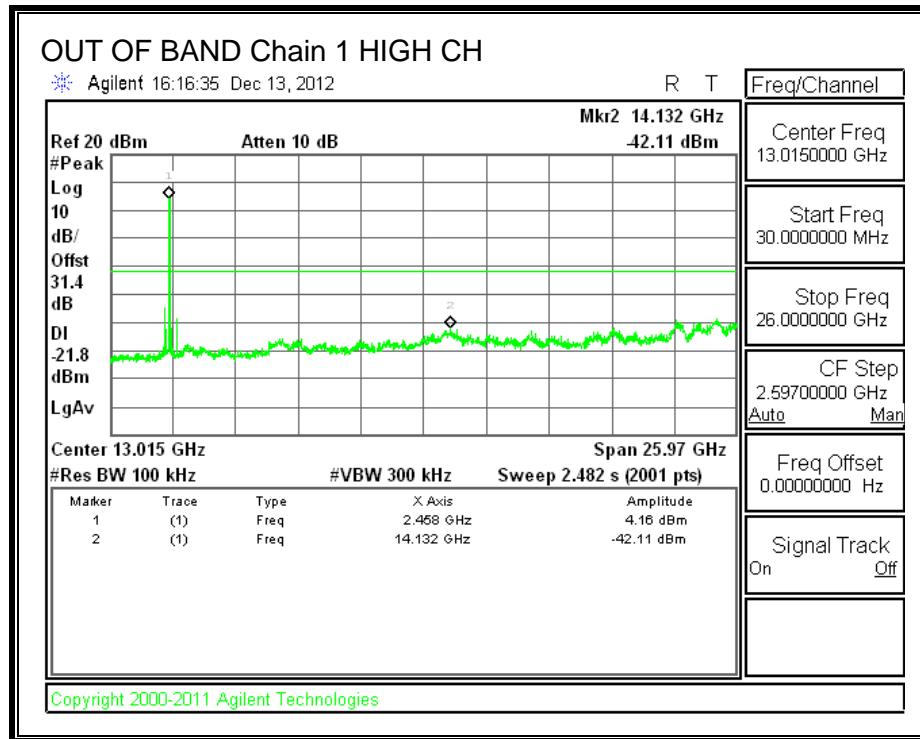

8.11. 802.11n HT20 CDD 3TX MODE IN THE 2.4 GHz BAND

8.11.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer with the RBW set between 1% and 5% of the EBW, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS


| Channel | Frequency (MHz) | 6 dB BW Chain 0 (MHz) | 6 dB BW Chain 1 (MHz) | 6 dB BW Chain 2 (MHz) | Minimum Limit (MHz) |
|---------|--------------------|-----------------------------|-----------------------------|-----------------------------|---------------------------|
| Low | 2412 | 17.62 | 17.62 | 17.67 | 0.5 |
| Mid | 2437 | 17.62 | 17.62 | 17.67 | 0.5 |
| High | 2462 | 17.58 | 17.67 | 17.67 | 0.5 |



6 dB BANDWIDTH, Chain 0

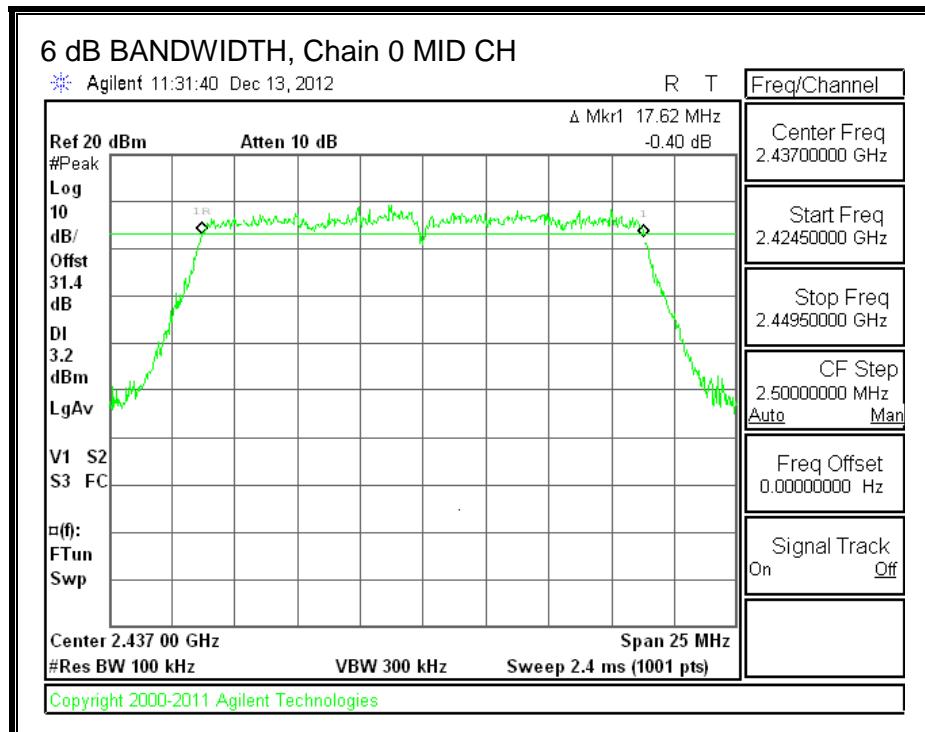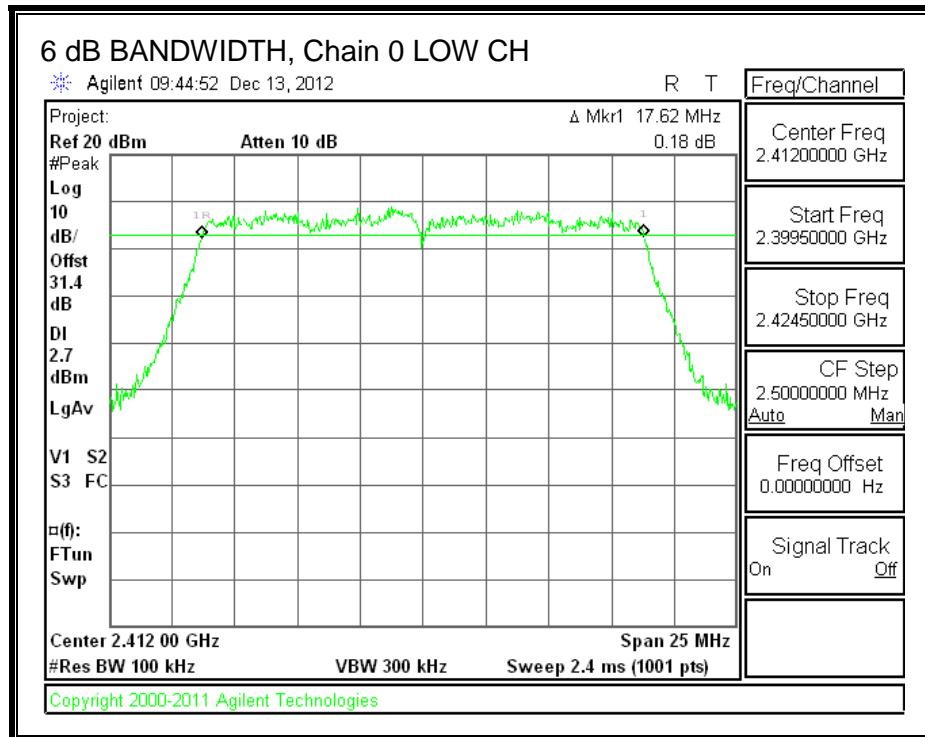


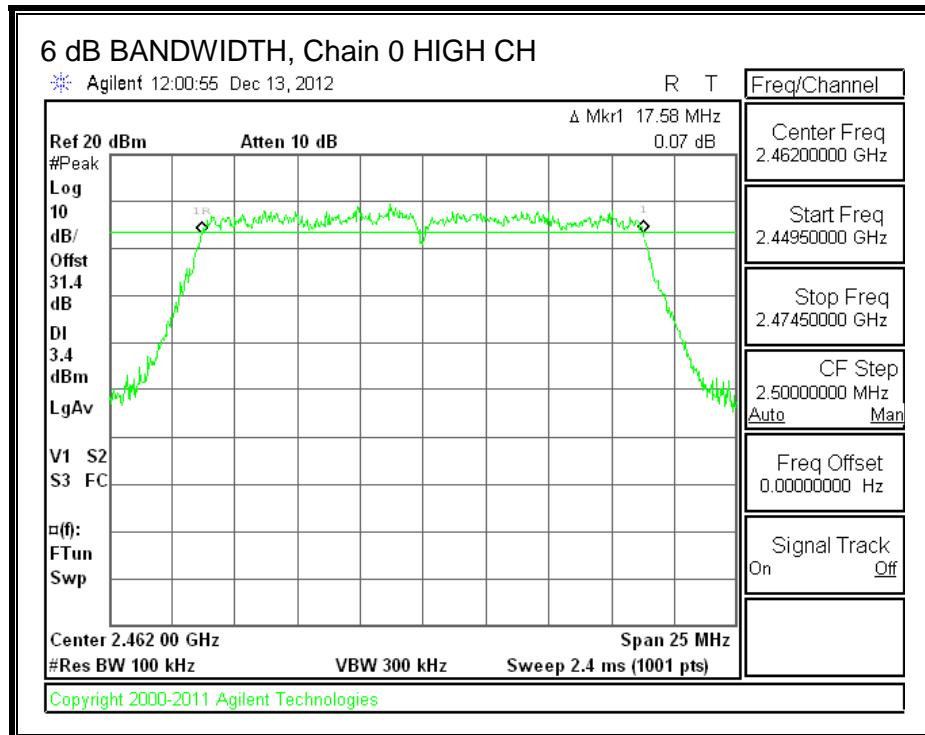



6 dB BANDWIDTH, Chain 1

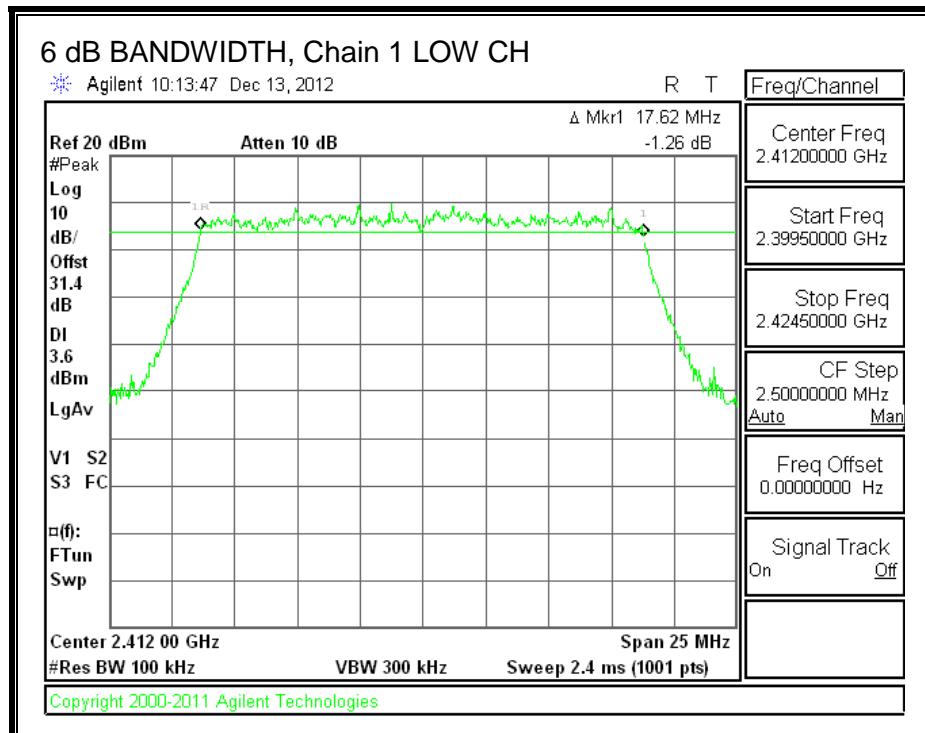

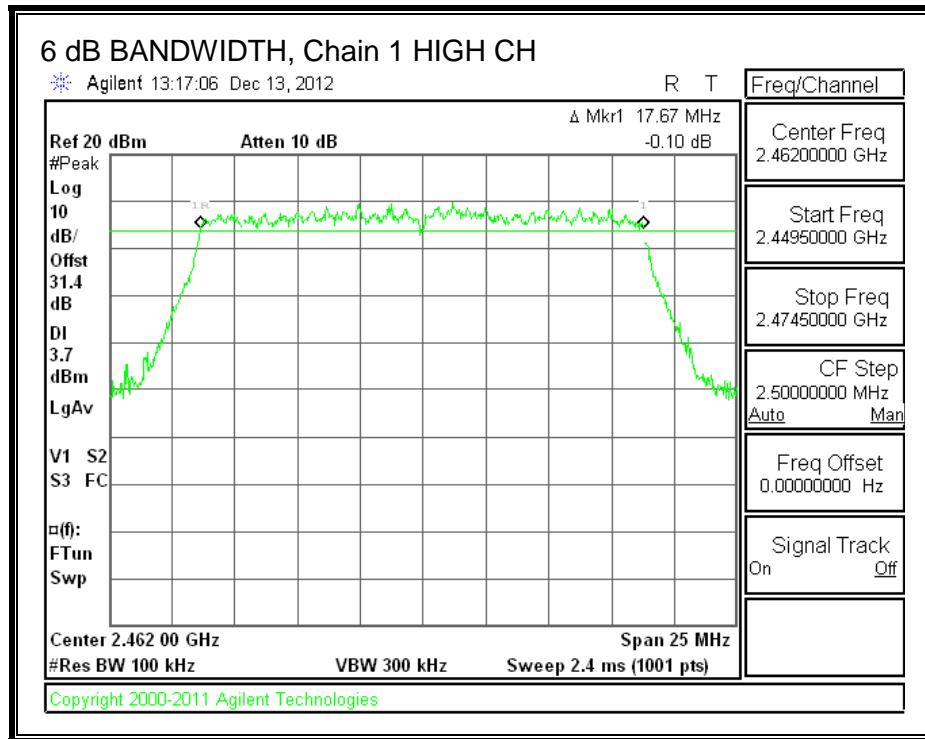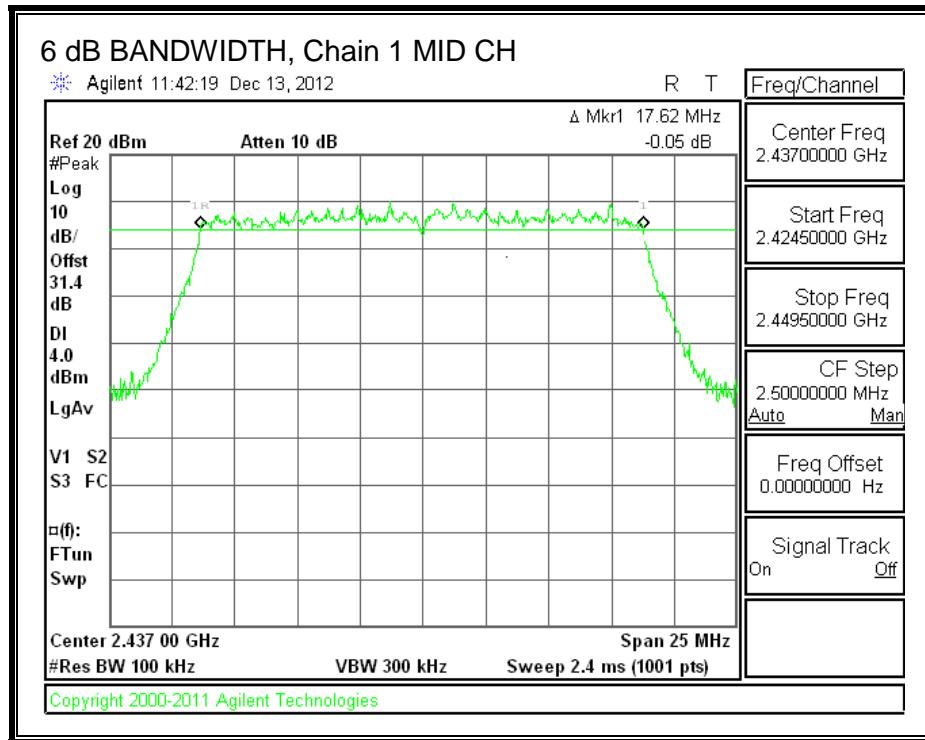

6 dB BANDWIDTH, Chain 2

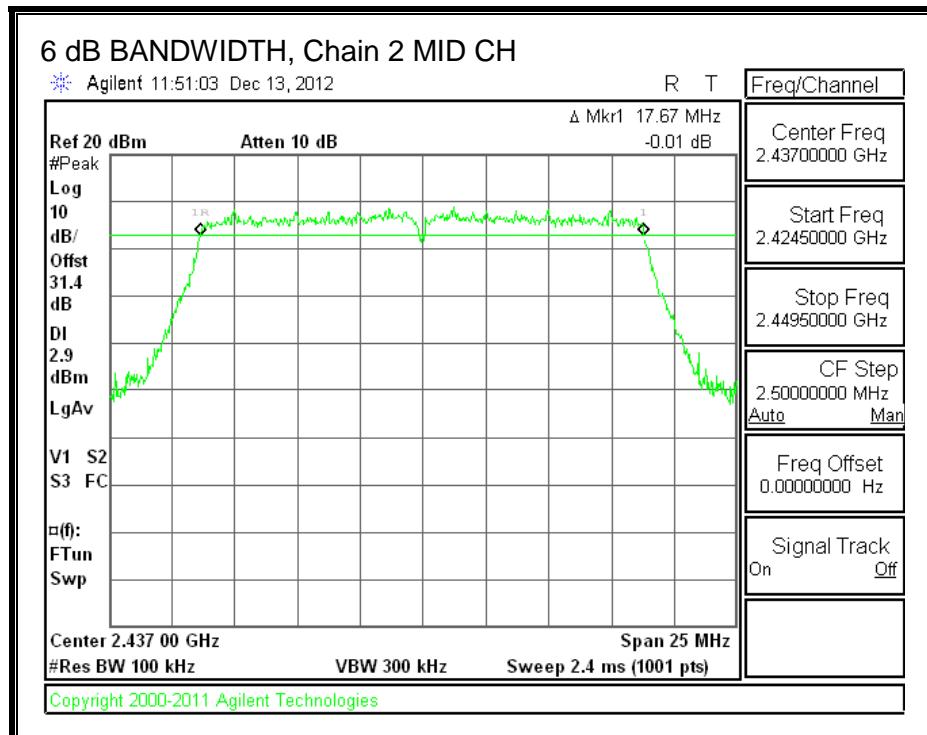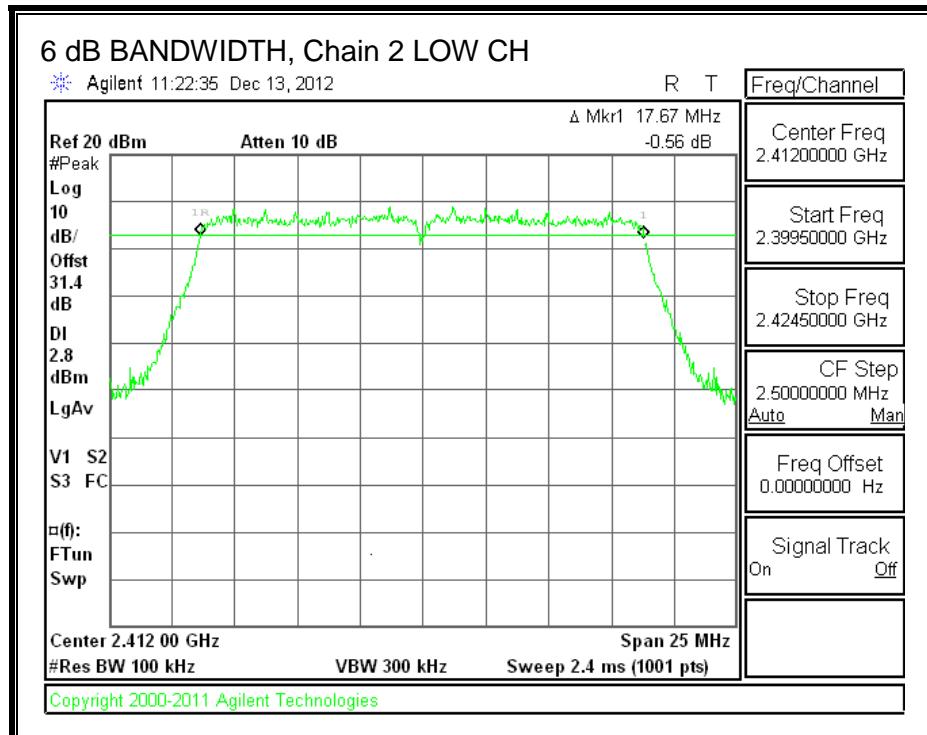

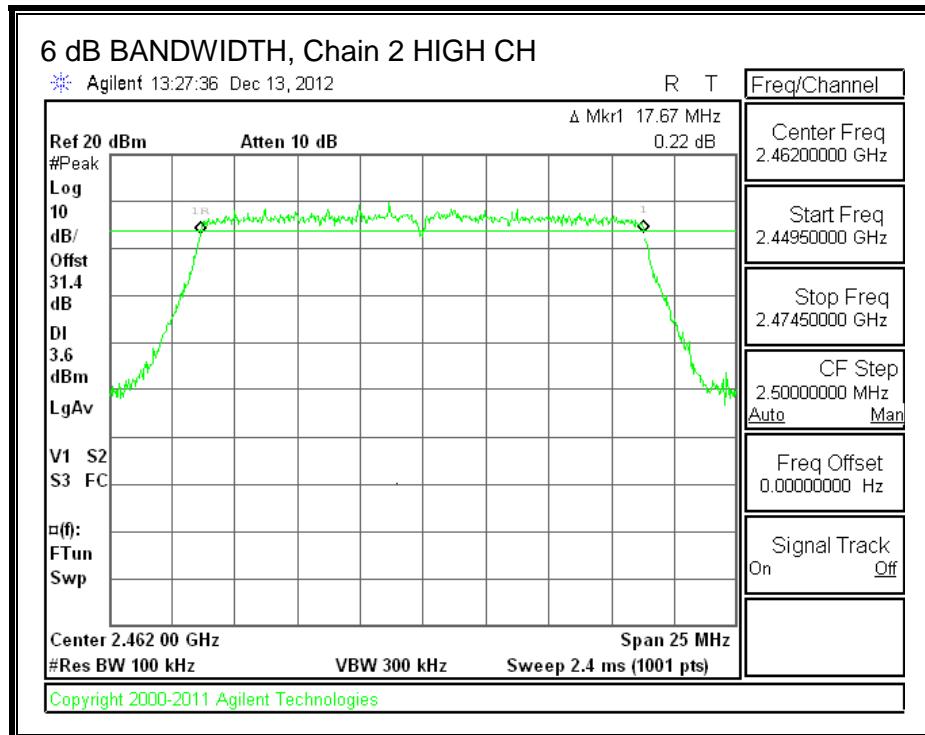

8.11.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Low | 2412 | 17.6836 | 17.6544 | 17.6840 |
| Mid | 2437 | 17.6794 | 17.6782 | 17.6820 |
| High | 2462 | 17.6845 | 17.6792 | 17.6895 |



99% BANDWIDTH, Chain 0

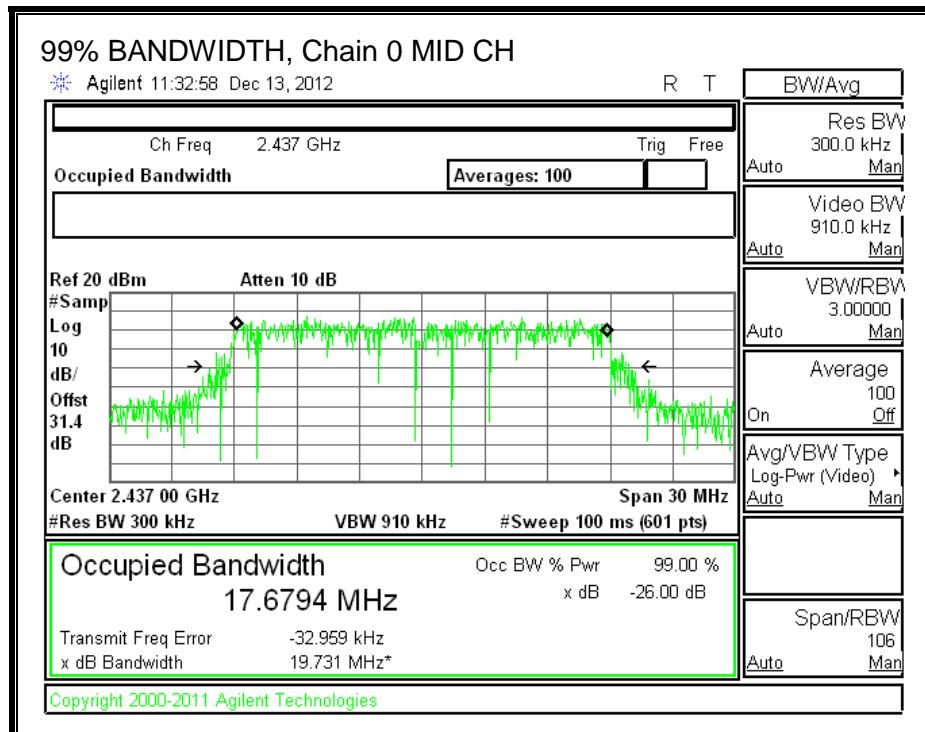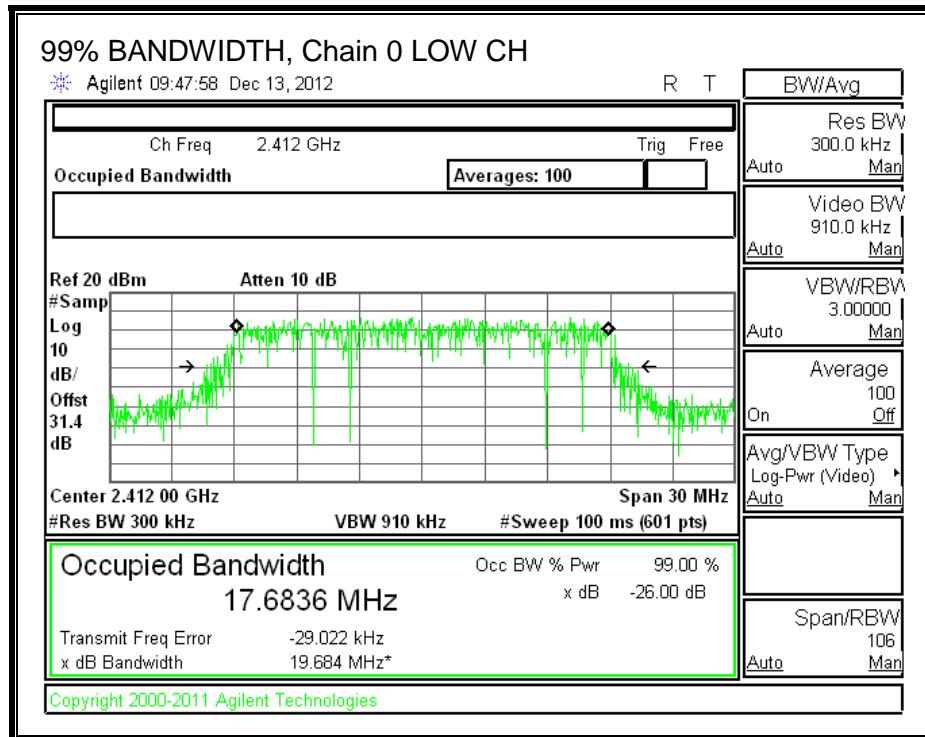


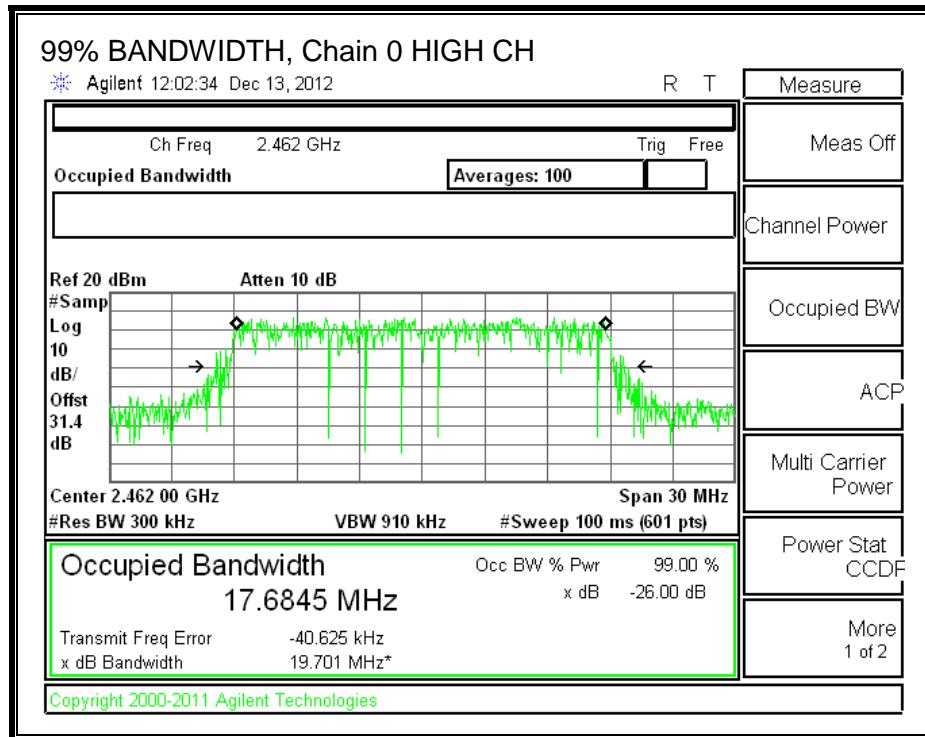



99% BANDWIDTH, Chain 1

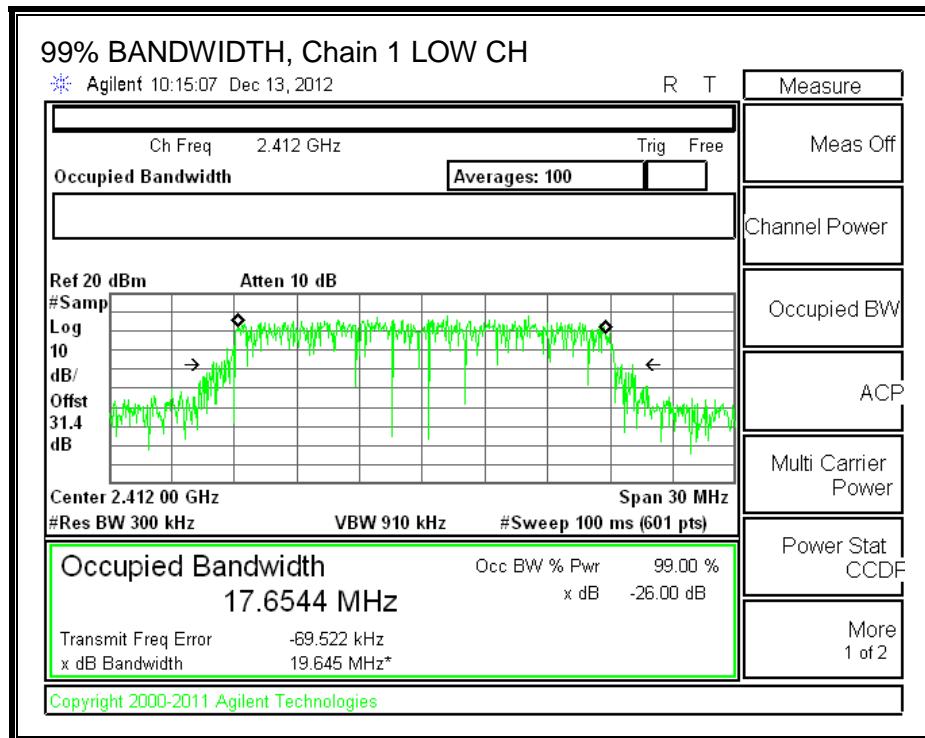

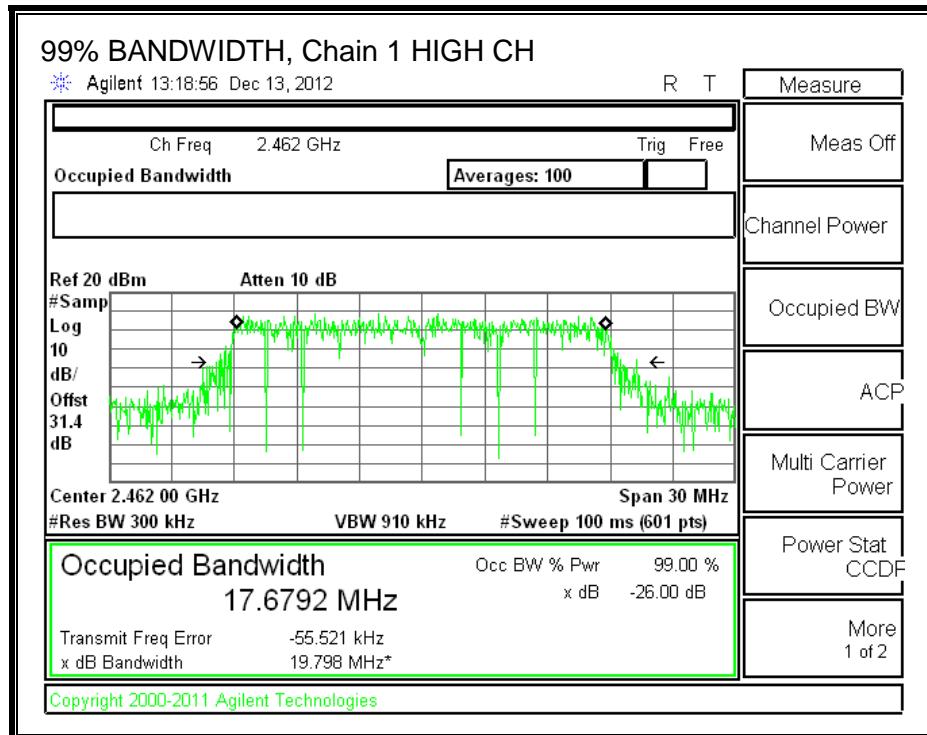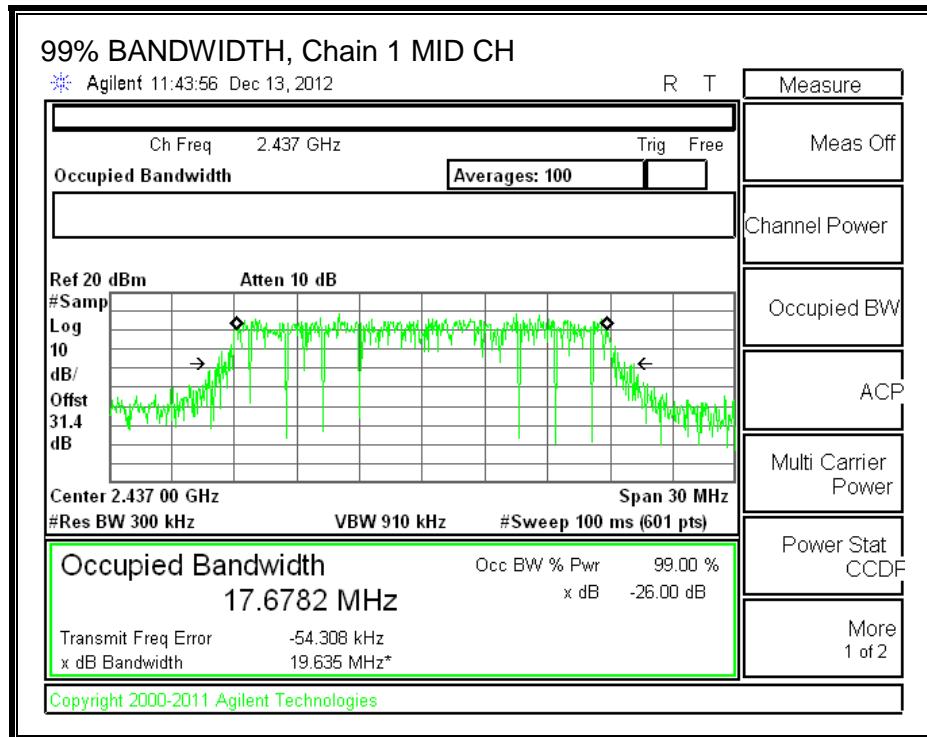

99% BANDWIDTH, Chain 2

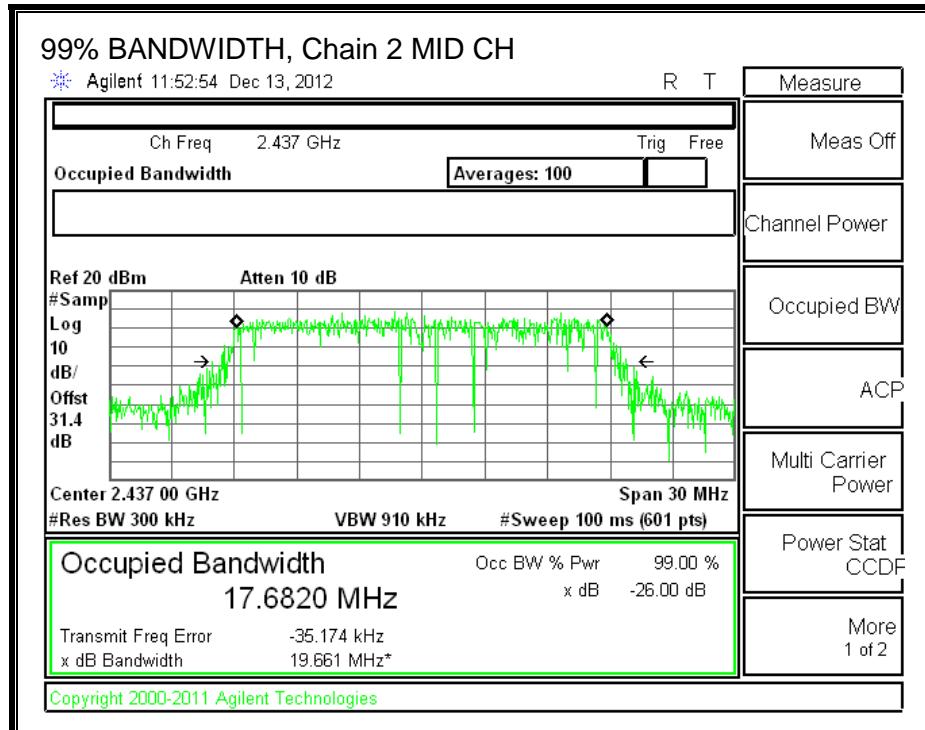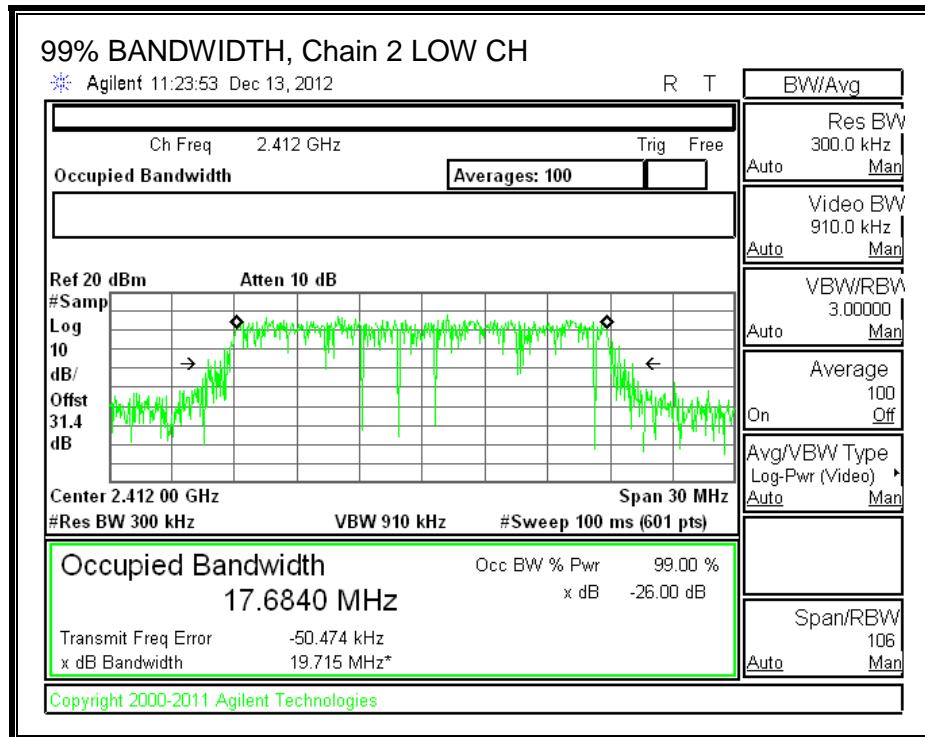

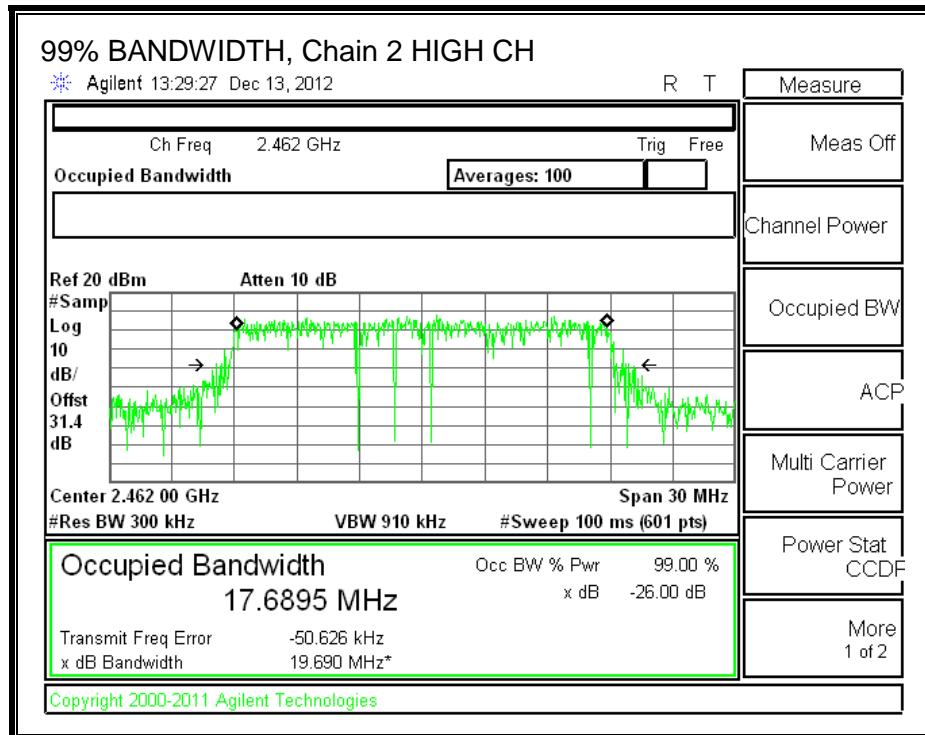

8.11.3. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Uncorrelated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 3.00 | 3.00 | 3.10 | 3.03 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | 3.03 | 30.00 | 30 | 36 | 30.00 |
| Mid | 2437 | 3.03 | 30.00 | 30 | 36 | 30.00 |
| High | 2462 | 3.03 | 30.00 | 30 | 36 | 30.00 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low1 | 2412 | 14.90 | 15.50 | 15.30 | 20.01 | 30.00 | -9.99 |
| Low2 | 2417 | 15.90 | 16.30 | 16.15 | 20.89 | 30.00 | -9.11 |
| Low3 | 2422 | 16.90 | 17.25 | 17.05 | 21.84 | 30.00 | -8.16 |
| Mid | 2437 | 21.90 | 22.50 | 22.30 | 27.01 | 30.00 | -2.99 |
| High3 | 2452 | 18.45 | 18.86 | 18.60 | 23.41 | 30.00 | -6.59 |
| High2 | 2457 | 16.90 | 17.30 | 17.05 | 21.86 | 30.00 | -8.14 |
| High1 | 2462 | 15.00 | 15.80 | 15.50 | 20.22 | 30.00 | -9.78 |

8.11.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-210 A8.2



The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


RESULTS

PSD Results


| Channel | Frequency (MHz) | Chain 0 Meas (dBm) | Chain 1 Meas (dBm) | Chain 2 Meas (dBm) | Total PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|--------------------------|--------------------------|--------------------------|-----------------------|----------------|----------------|
| Low | 2412 | -6.31 | -6.22 | -6.61 | -1.61 | 8.0 | -9.6 |
| Mid | 2437 | -7.47 | -5.64 | -6.75 | -1.78 | 8.0 | -9.8 |
| High | 2462 | -7.04 | -4.50 | -5.76 | -0.87 | 8.0 | -8.9 |



PSD, Chain 0

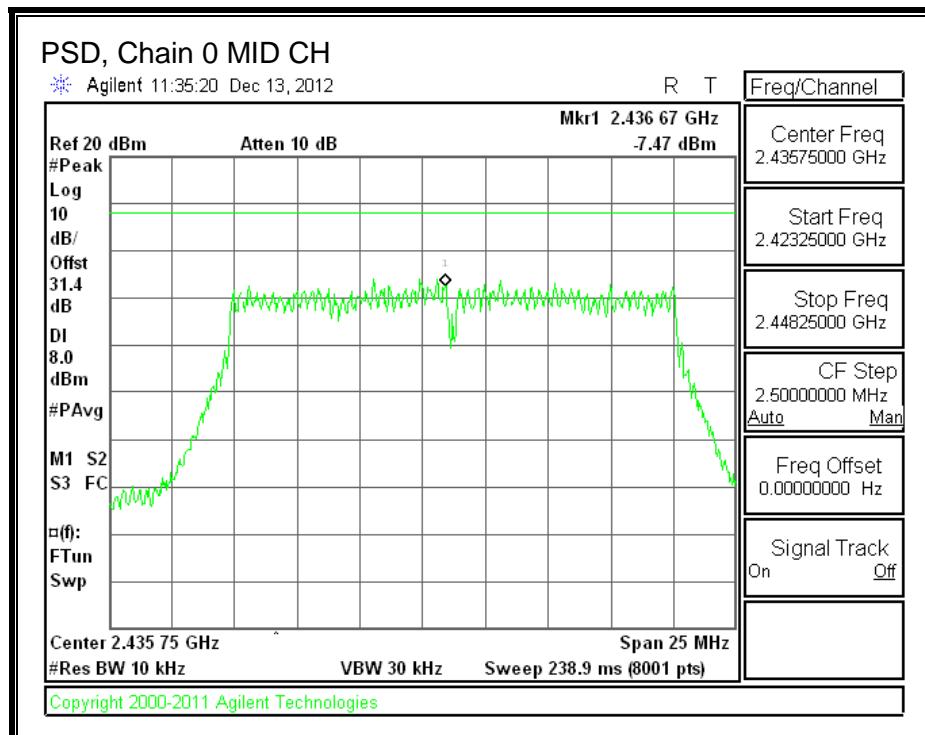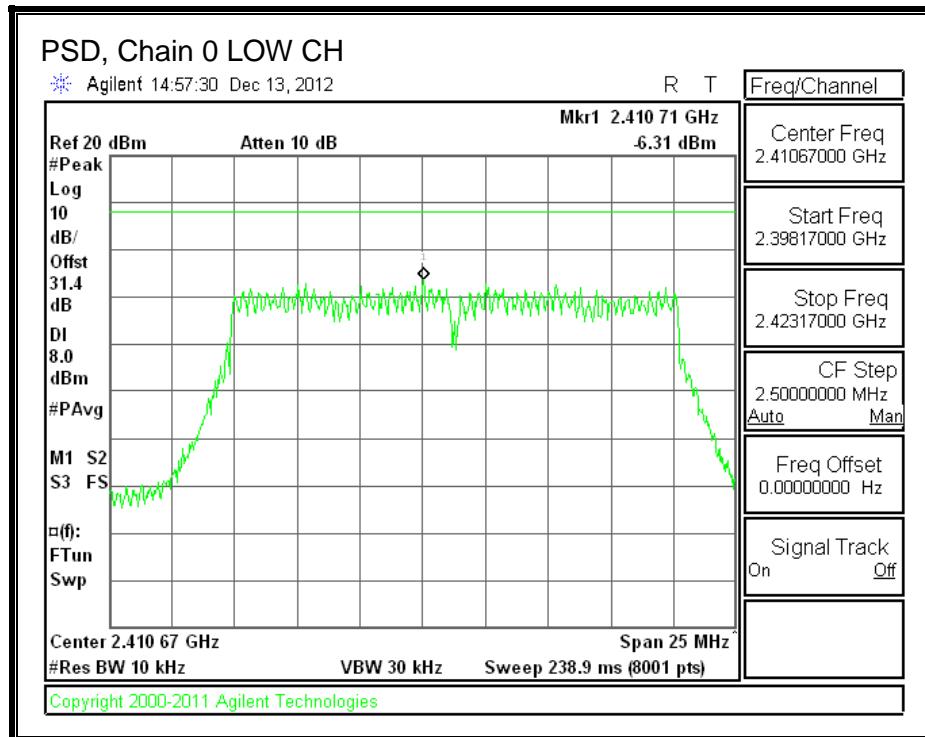


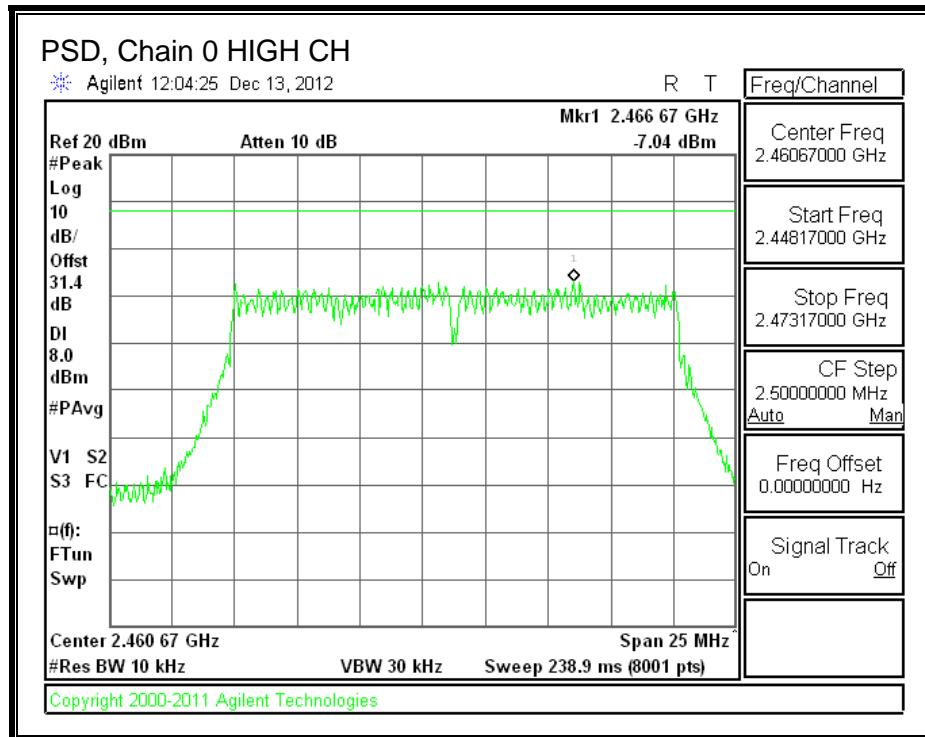



PSD, Chain 1

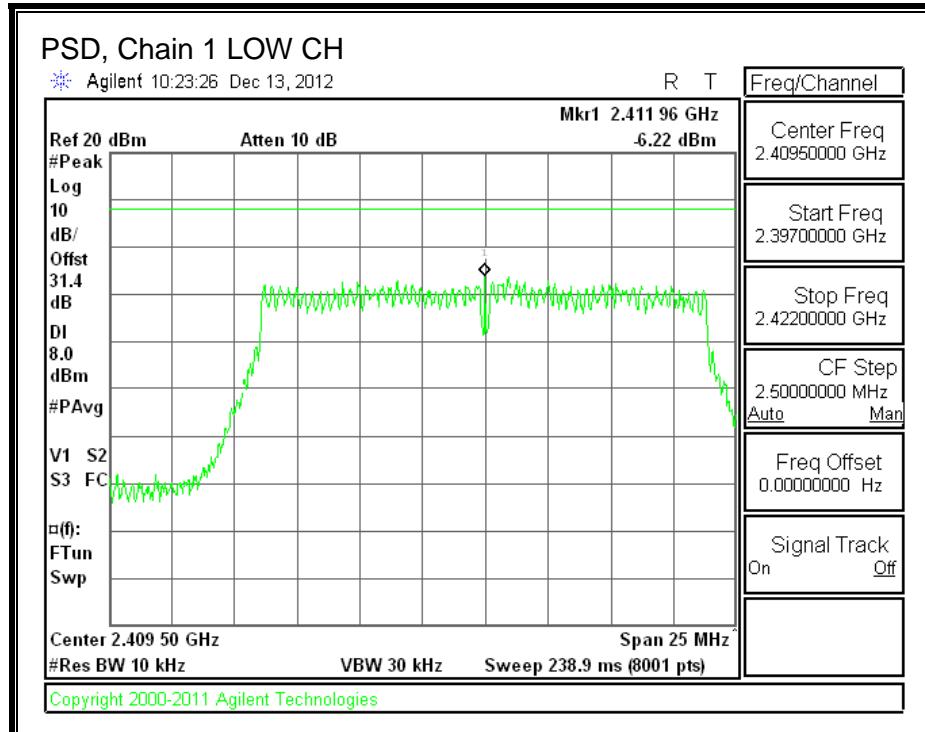

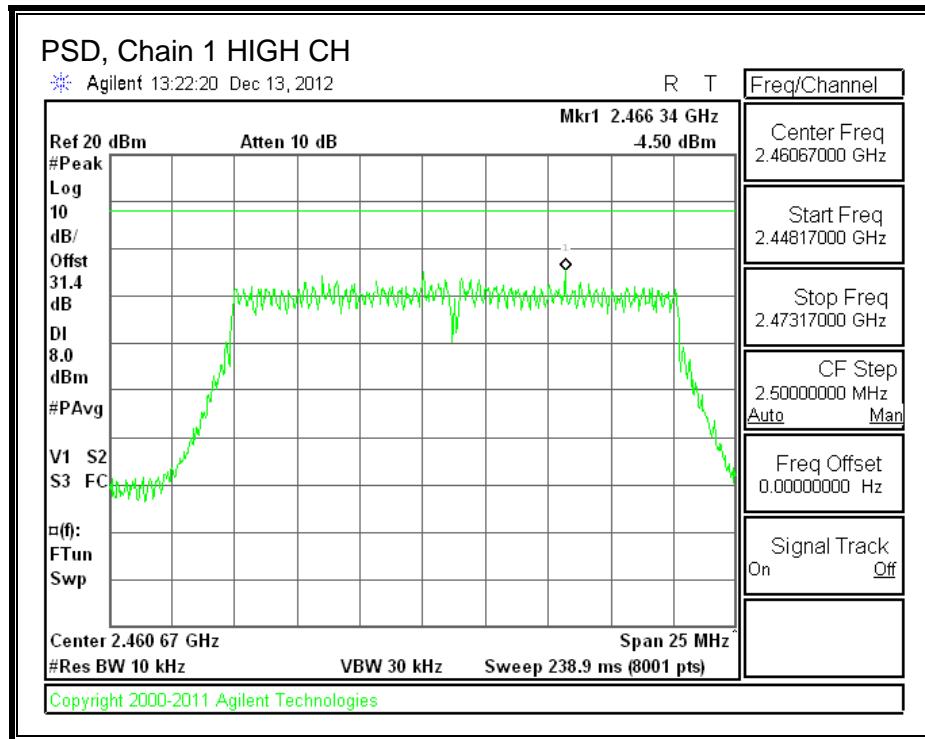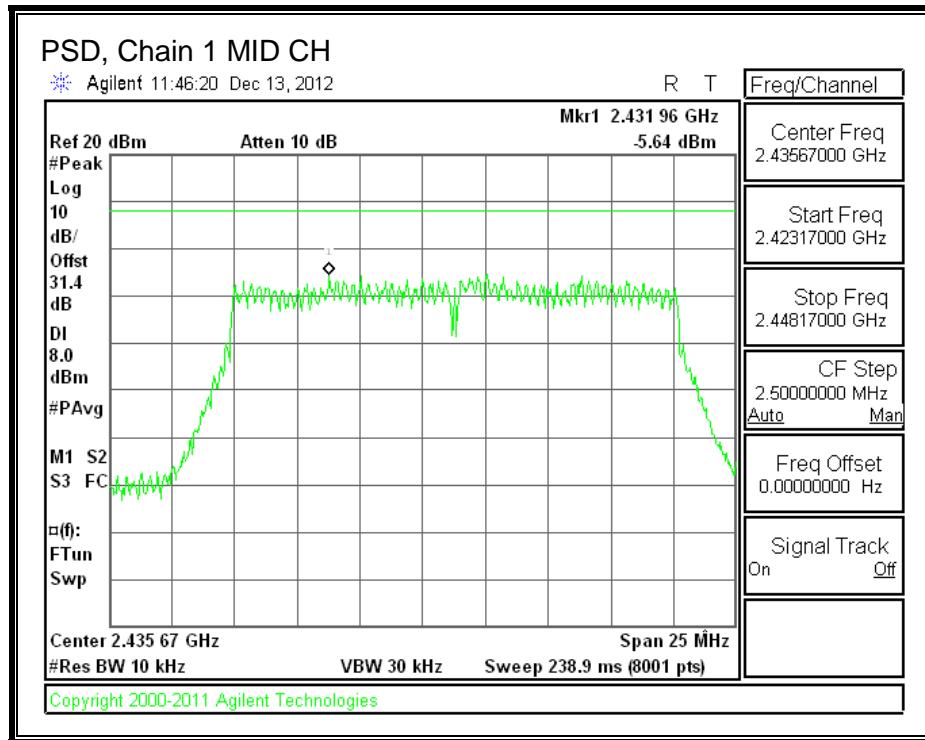

PSD, Chain 2

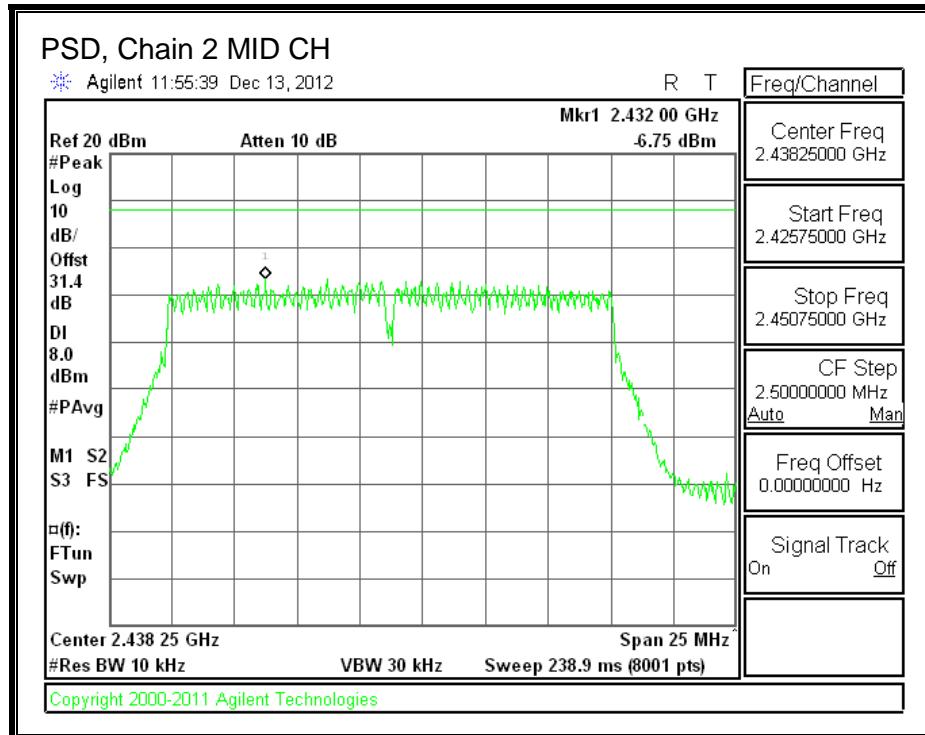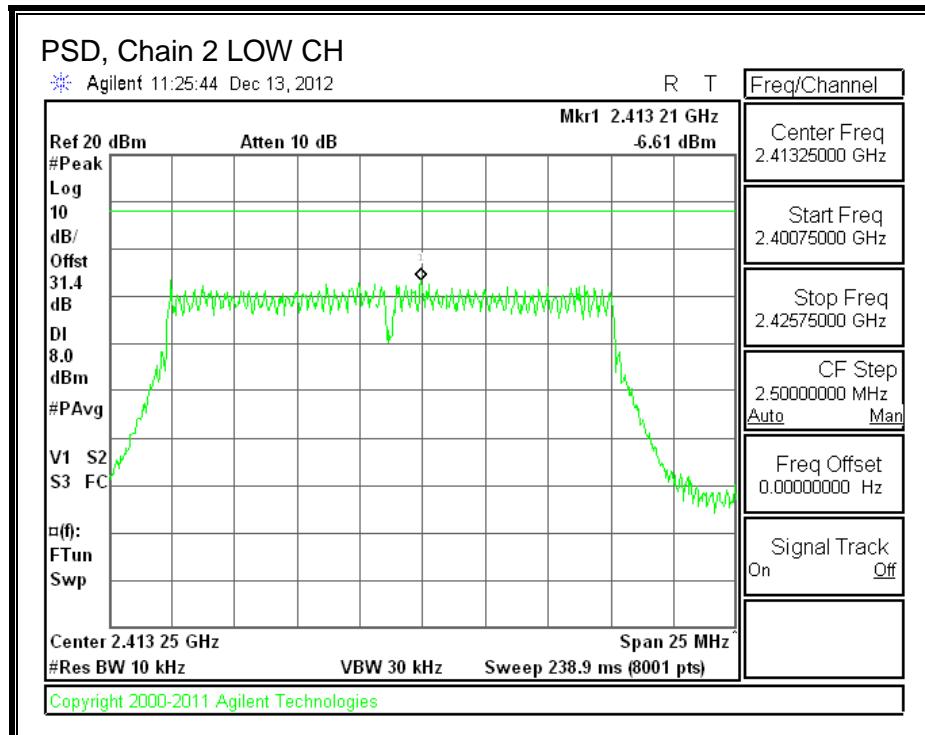

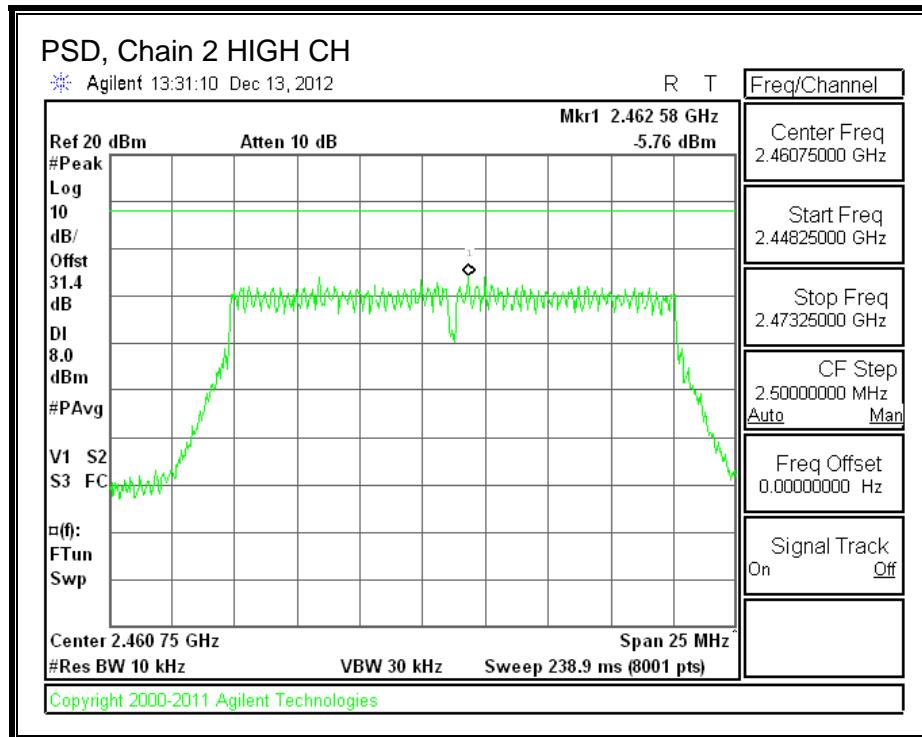

8.11.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-210 A8.5


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL, Chain 0

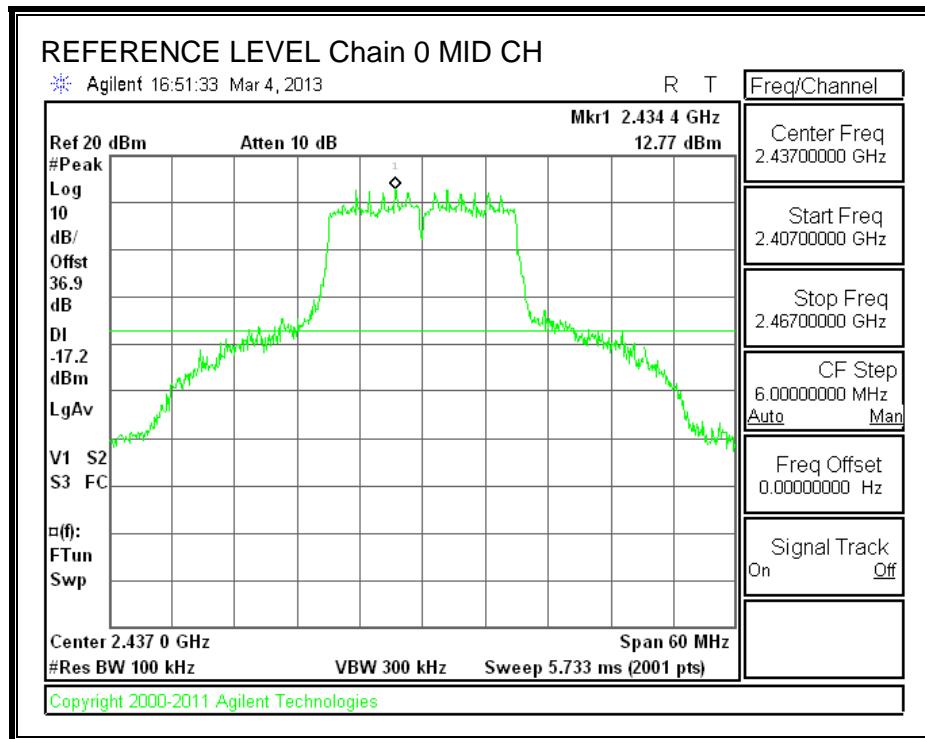



LOW CHANNEL BANDEDGE, Chain 0

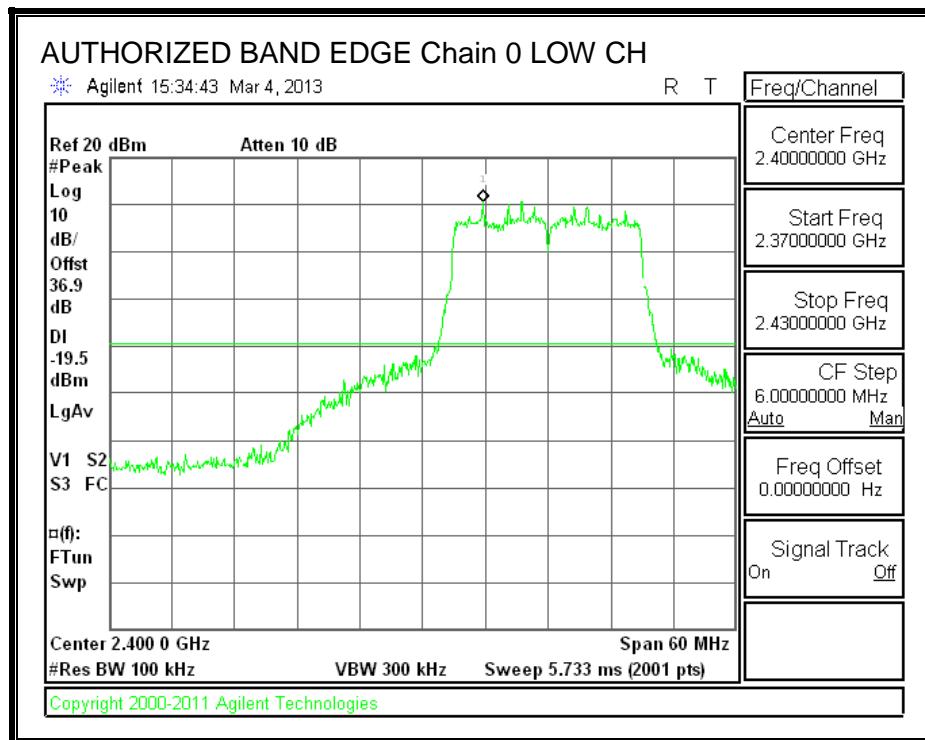


HIGH CHANNEL BANDEDGE, Chain 0

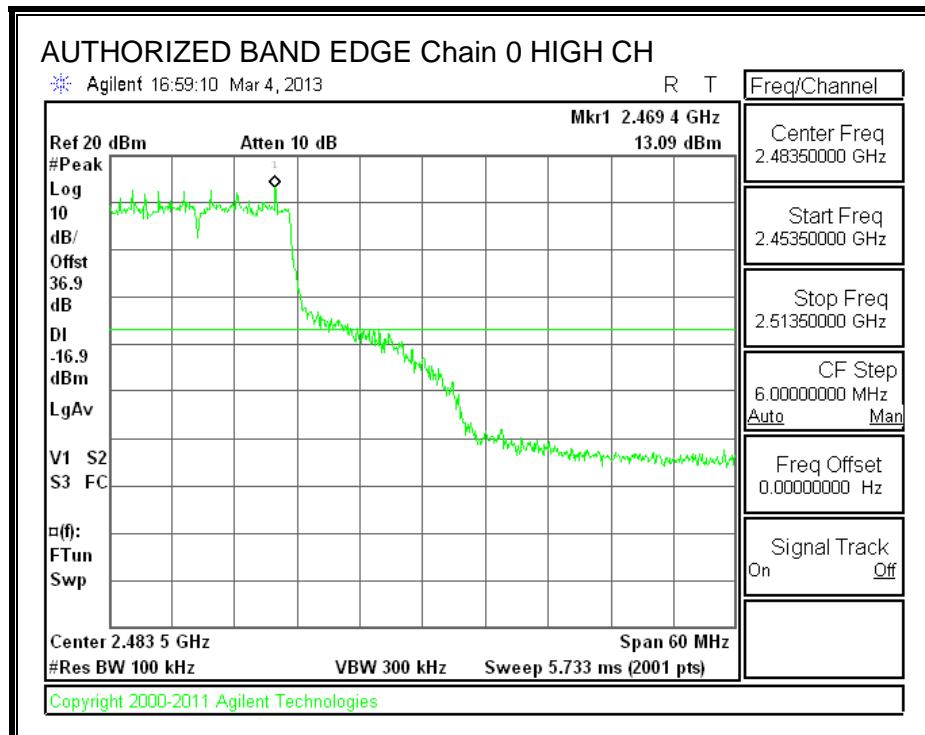


OUT-OF-BAND EMISSIONS, Chain 0

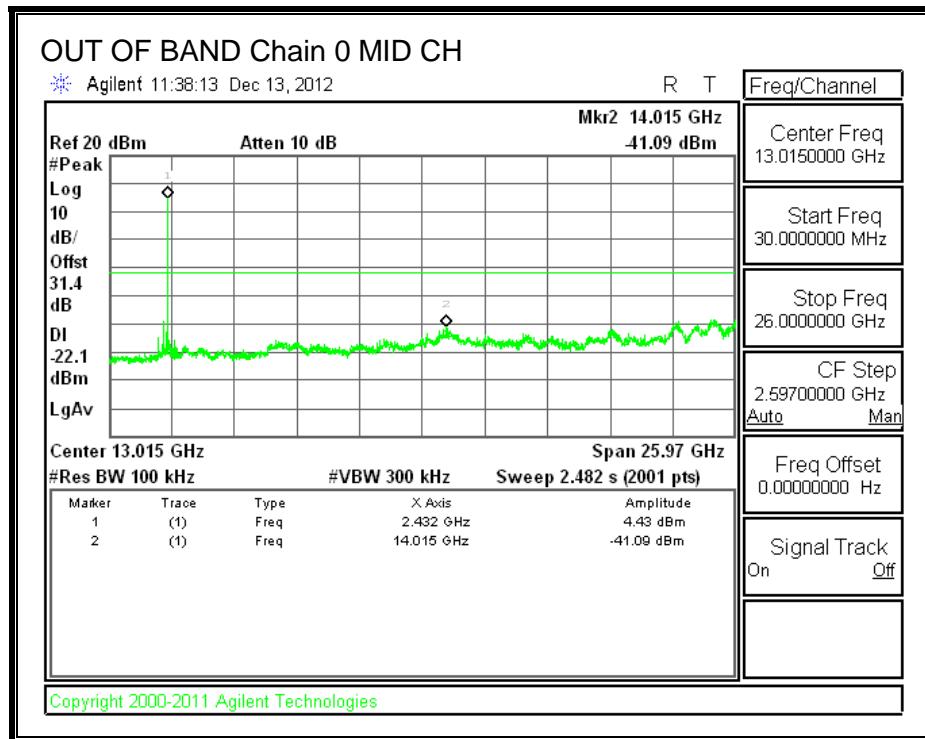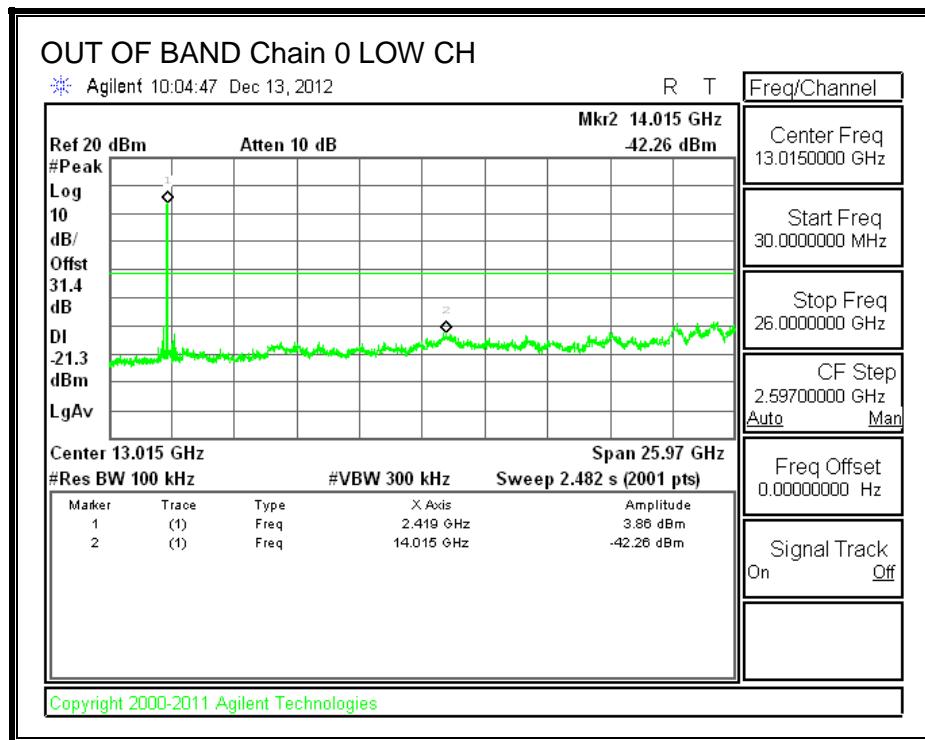


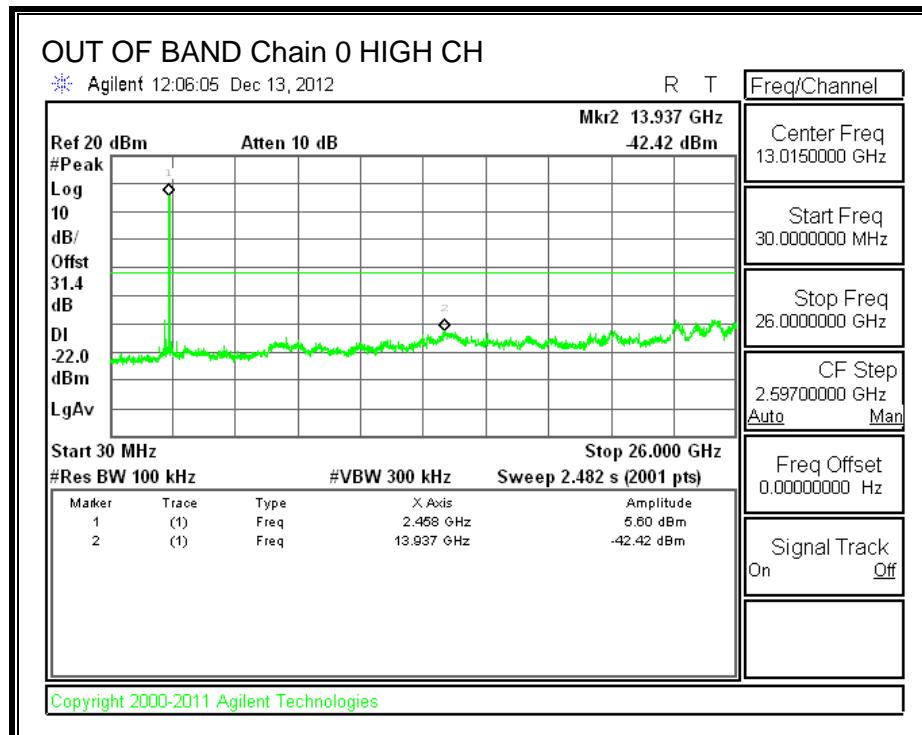


IN-BAND REFERENCE LEVEL, Chain 1

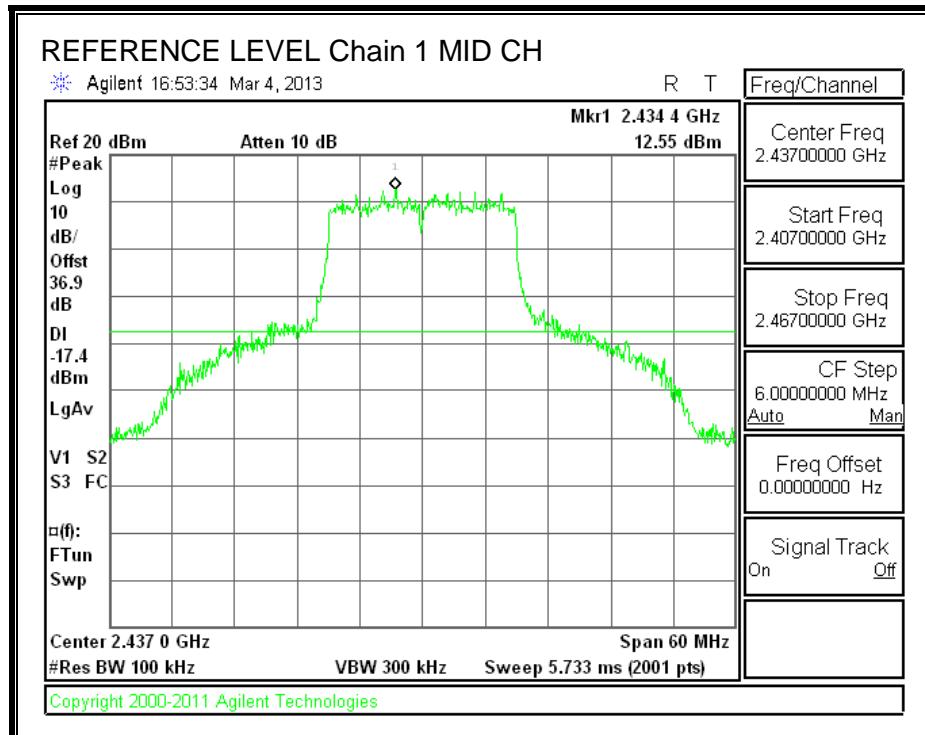



LOW CHANNEL BANDEDGE, Chain 1

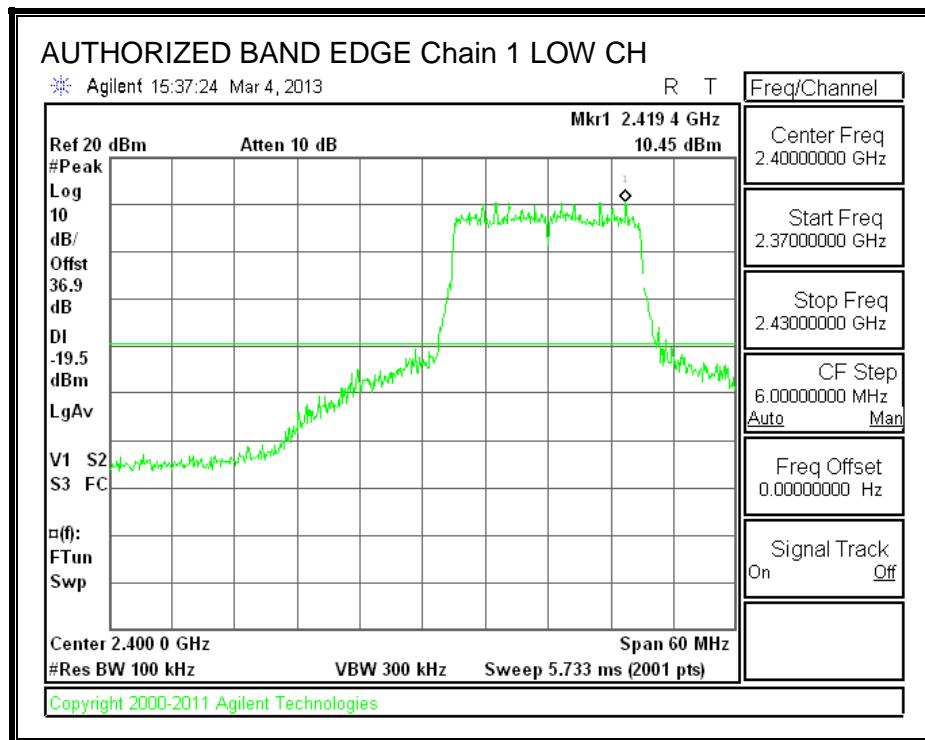


HIGH CHANNEL BANDEDGE, Chain 1

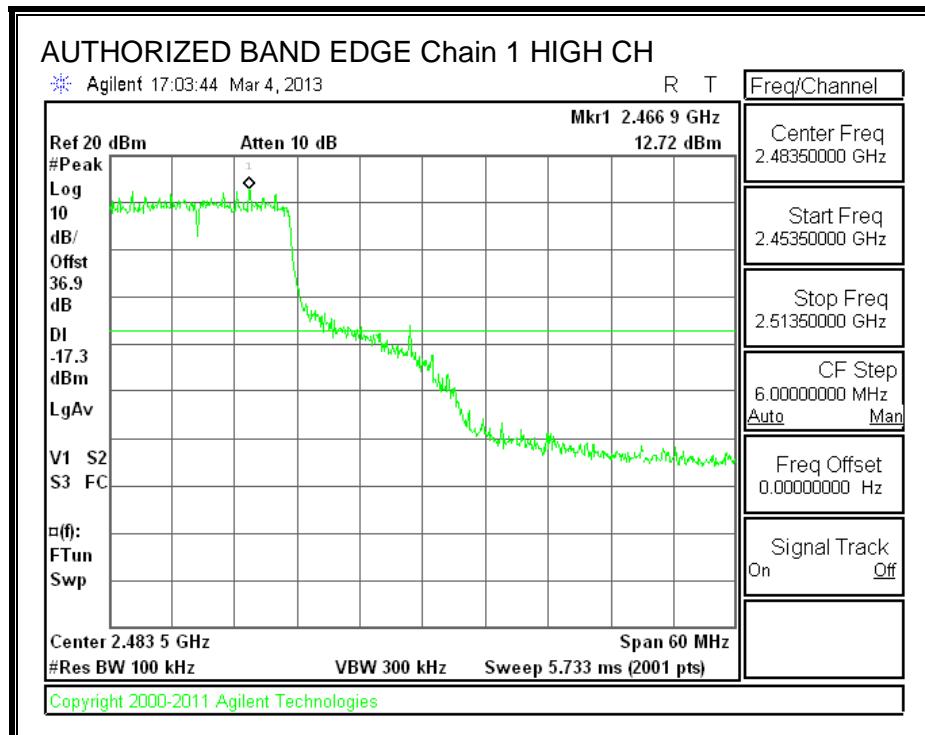


OUT-OF-BAND EMISSIONS, Chain 1

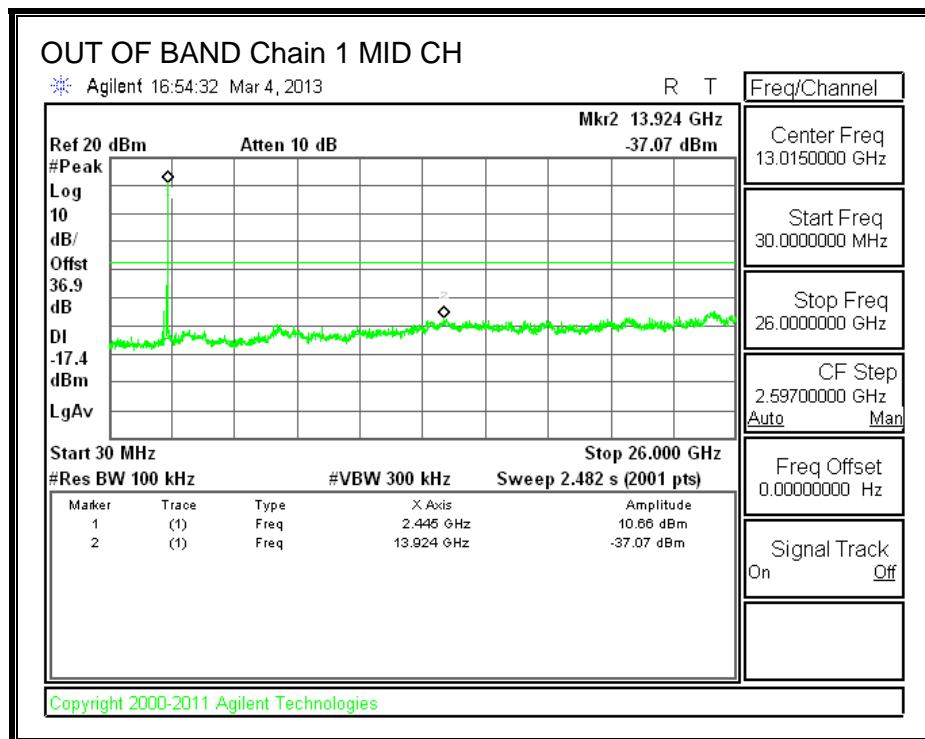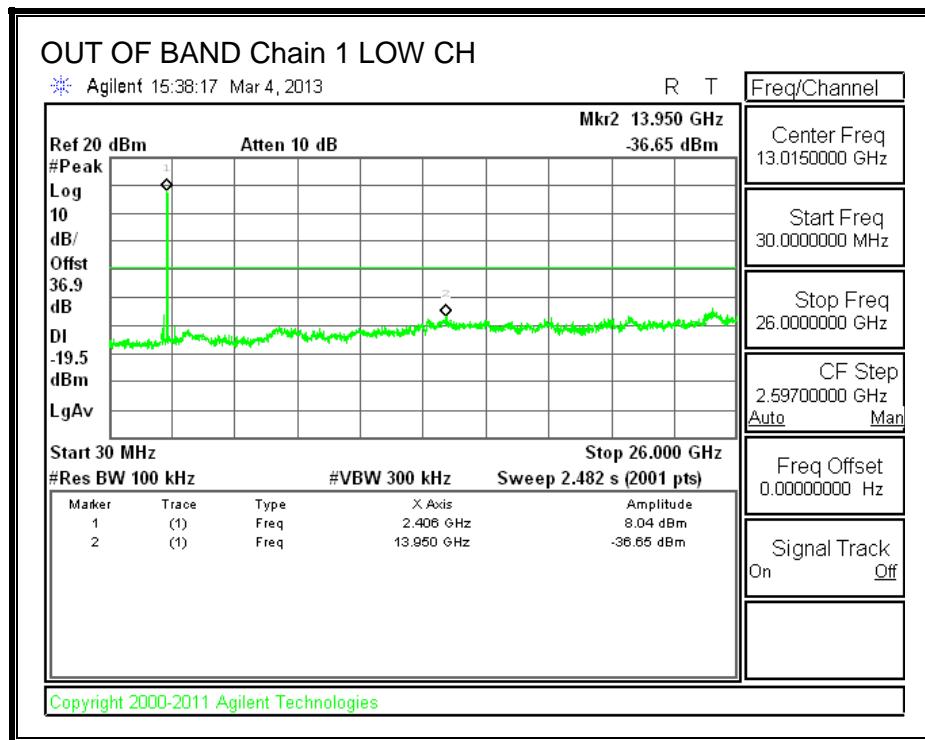


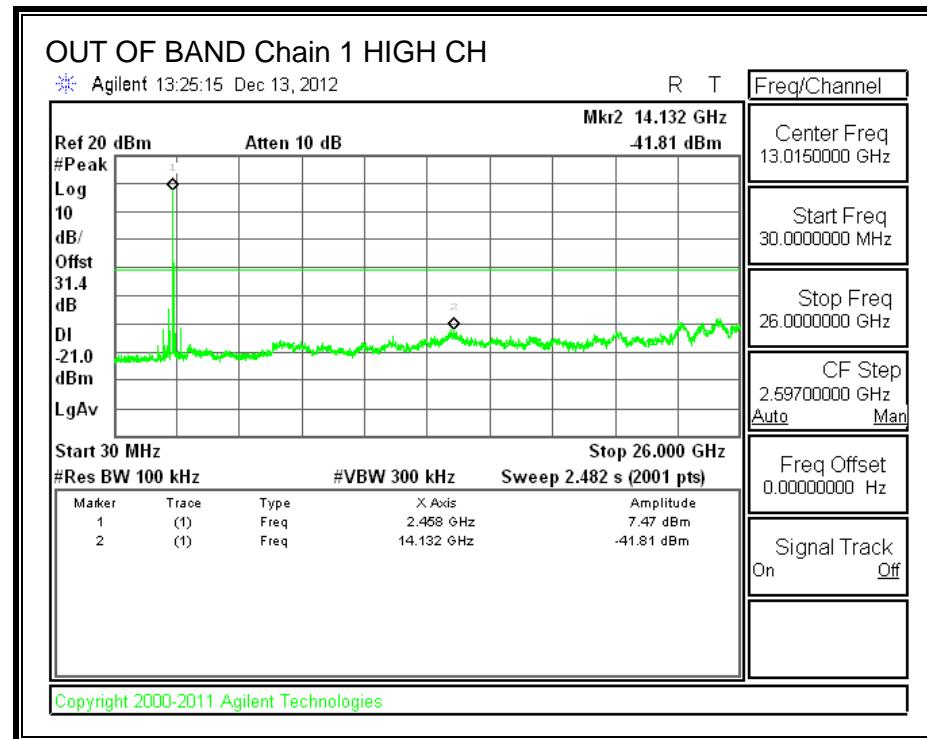


IN-BAND REFERENCE LEVEL, Chain 2

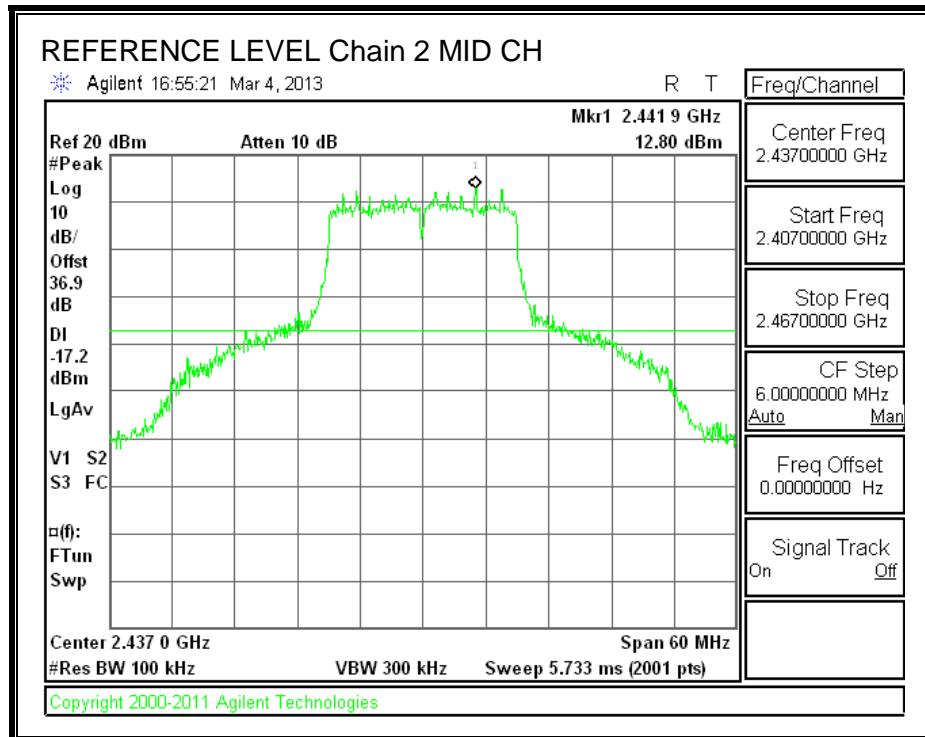



LOW CHANNEL BANDEDGE, Chain 2

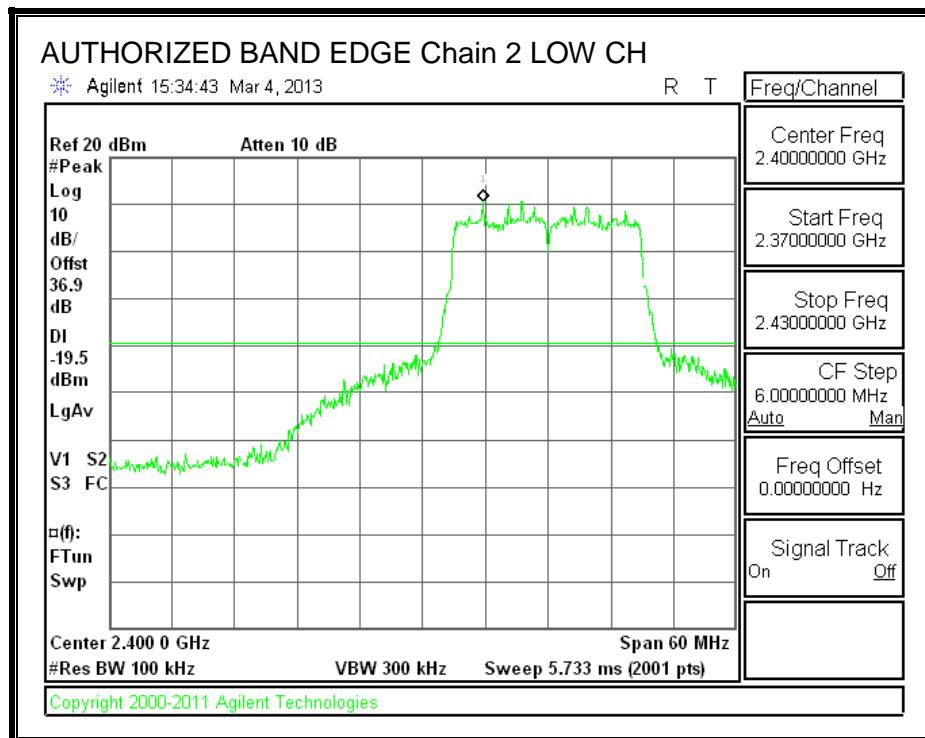


HIGH CHANNEL BANDEDGE, Chain 2

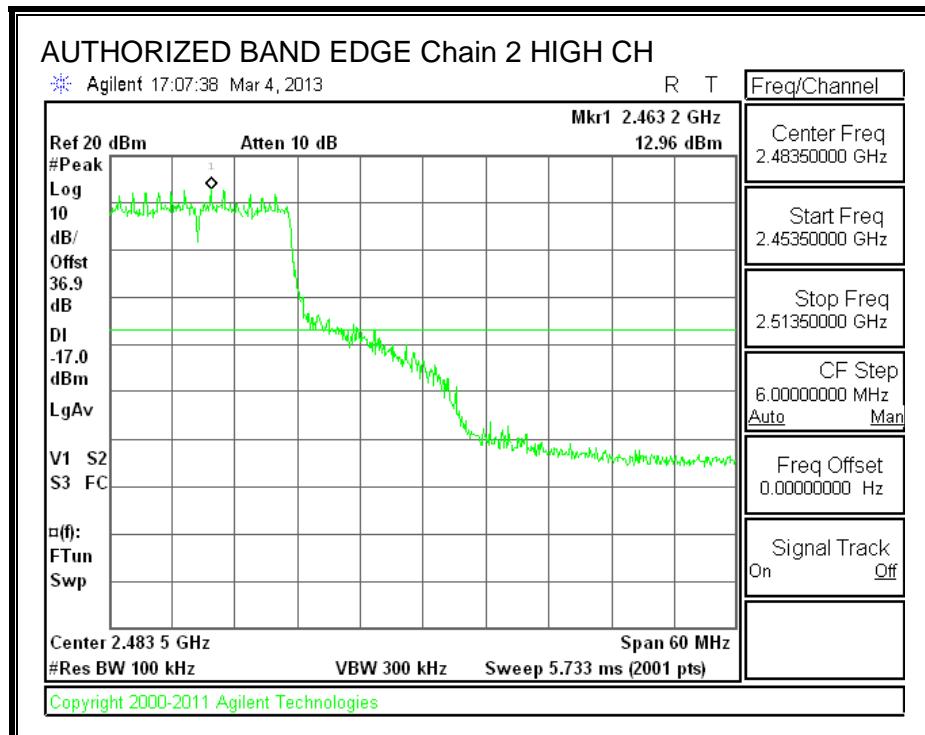

OUT-OF-BAND EMISSIONS, Chain 2

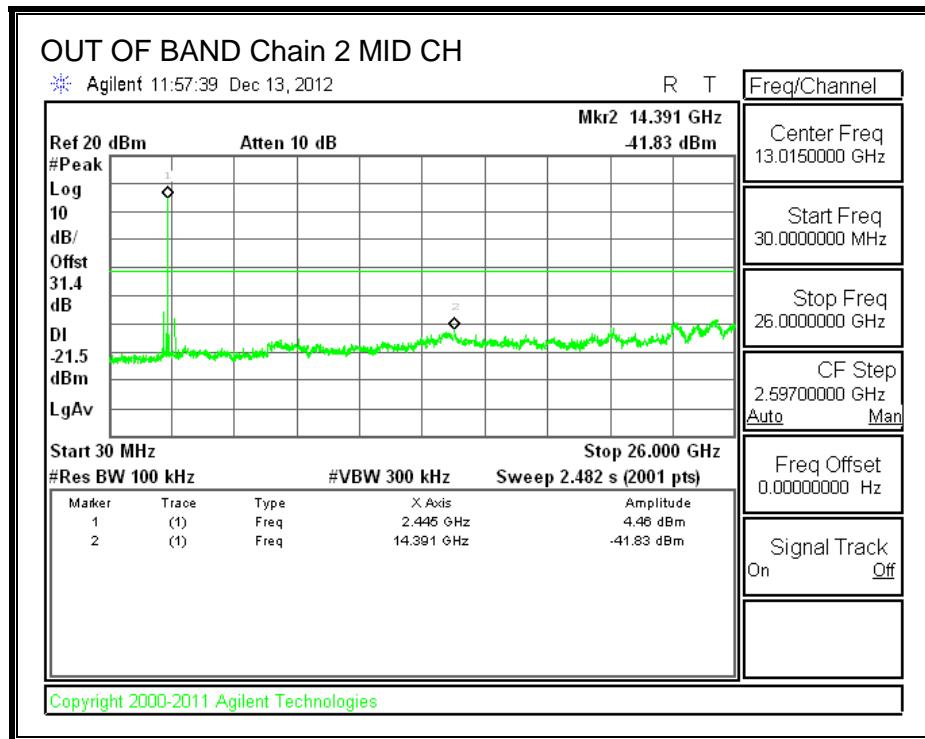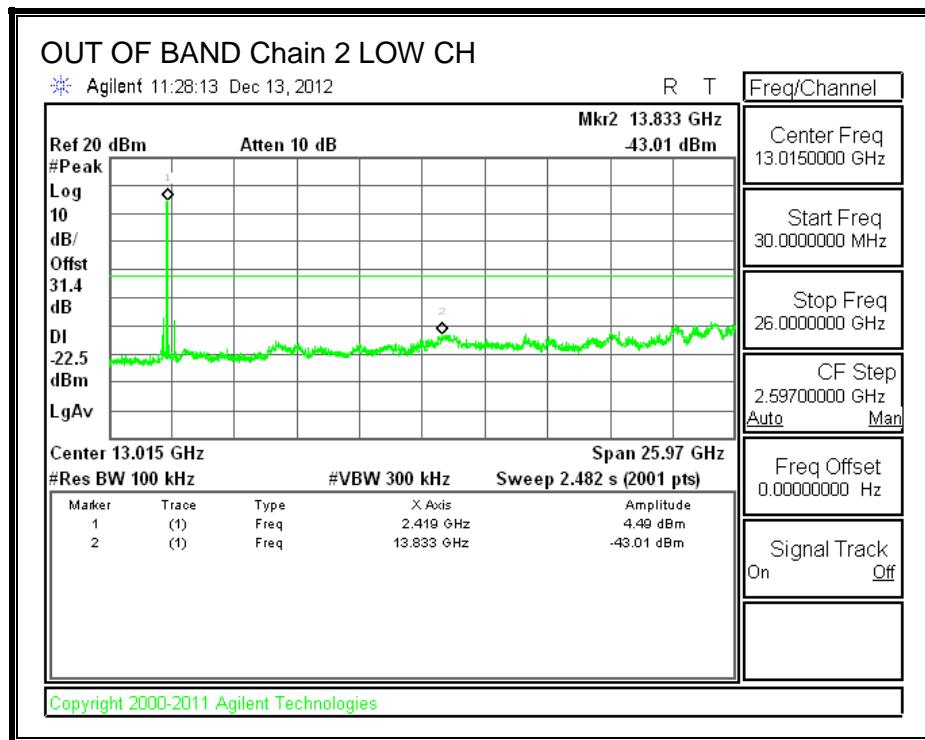

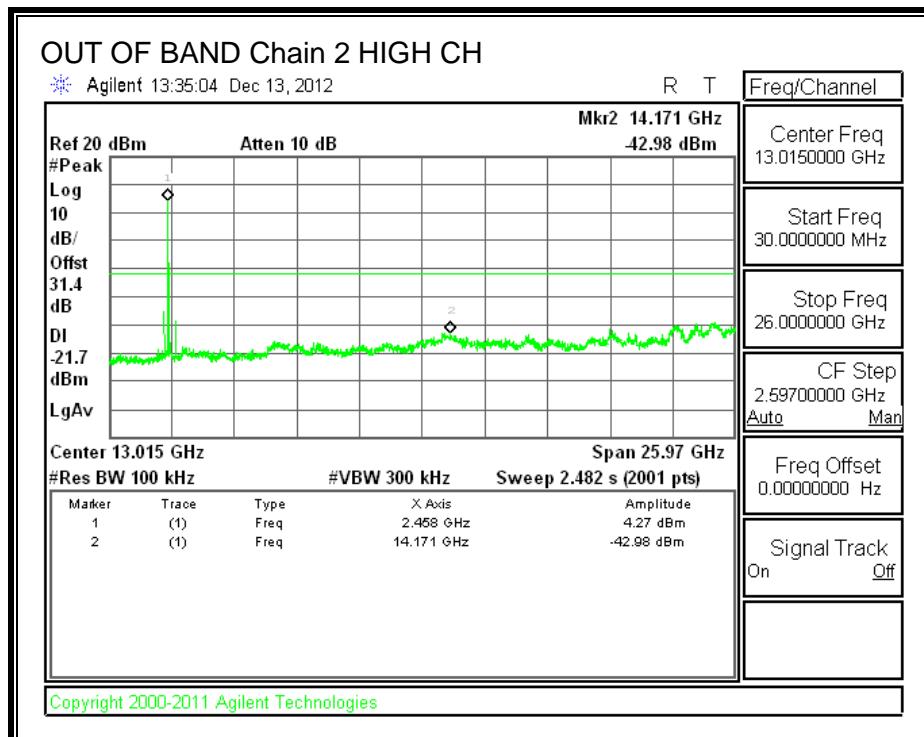

8.12. 802.11a 1TX MODE IN THE 5.8 GHz BAND

Covered by testing 11n HT20 CDD 3TX, power per chain used in the 802.11n HT20 CDD 3TX mode is equal to the power per chain that will be used for 802.11a 1TX.

8.13. 802.11a CDD 2TX MODE IN THE 5.8 GHz BAND

Covered by testing 11n HT20 CDD 3TX, power per chain used in the 802.11n HT20 CDD 3TX mode is equal to the power per chain that will be used for 802.11a 2TX.

8.14. 802.11a CDD 3TX MODE IN THE 5.8 GHz BAND

Covered by testing 11n HT20 CDD 3TX, power per chain used in the 802.11n HT20 CDD 3TX mode is equal to the power per chain that will be used for 802.11a 3TX.

8.15. 802.11n HT20 1TX MODE IN THE 5.8 GHz BAND

Covered by testing 11n HT20 CDD 3TX, power per chain used in the 802.11n HT20 CDD 3TX mode is equal to the power per chain that will be used for 802.11n HT20 1TX.

8.16. 802.11n HT20 CDD 2TX MODE IN THE 5.8 GHz BAND

Covered by testing 11n HT20 CDD 3TX, power per chain used in the 802.11n HT20 CDD 3TX mode is equal to the power per chain that will be used for 802.11n HT20 2TX.

8.17. 802.11n HT20 CDD 3TX MODE IN THE 5.8 GHz BAND

8.17.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


| Channel | Frequency (MHz) | 6 dB BW Chain 0 (MHz) | 6 dB BW Chain 1 (MHz) | 6 dB BW Chain 2 (MHz) | Minimum Limit (MHz) |
|---------|--------------------|-----------------------------|-----------------------------|-----------------------------|---------------------------|
| Low | 5745 | 17.54 | 17.67 | 17.67 | 0.5 |
| Mid | 5785 | 17.67 | 17.67 | 17.71 | 0.5 |
| High | 5825 | 17.42 | 17.71 | 17.62 | 0.5 |



6 dB BANDWIDTH, Chain 0

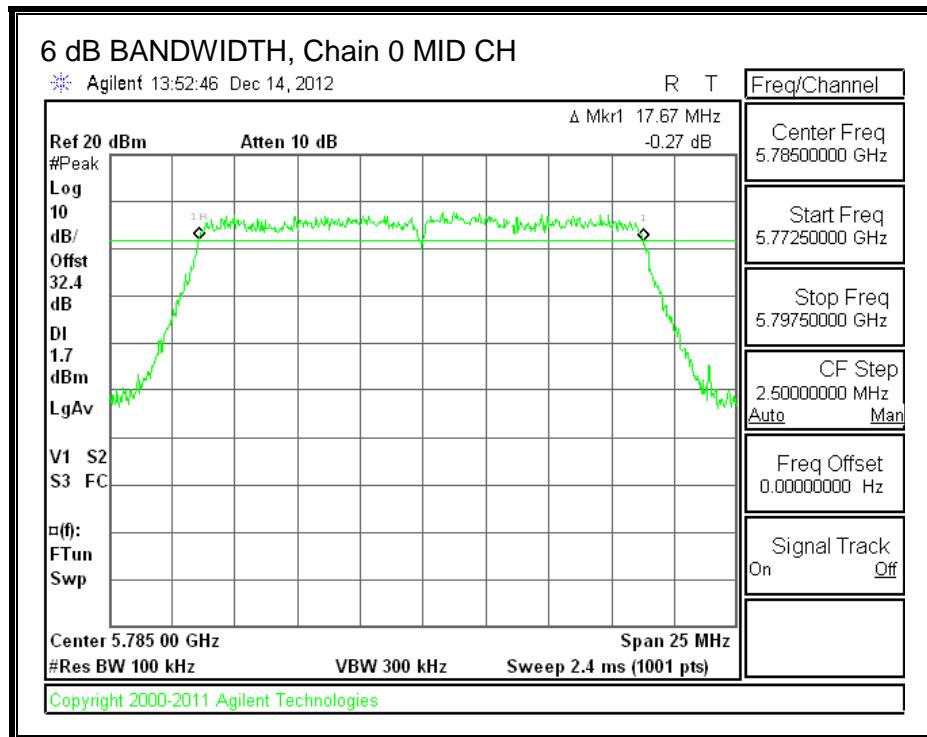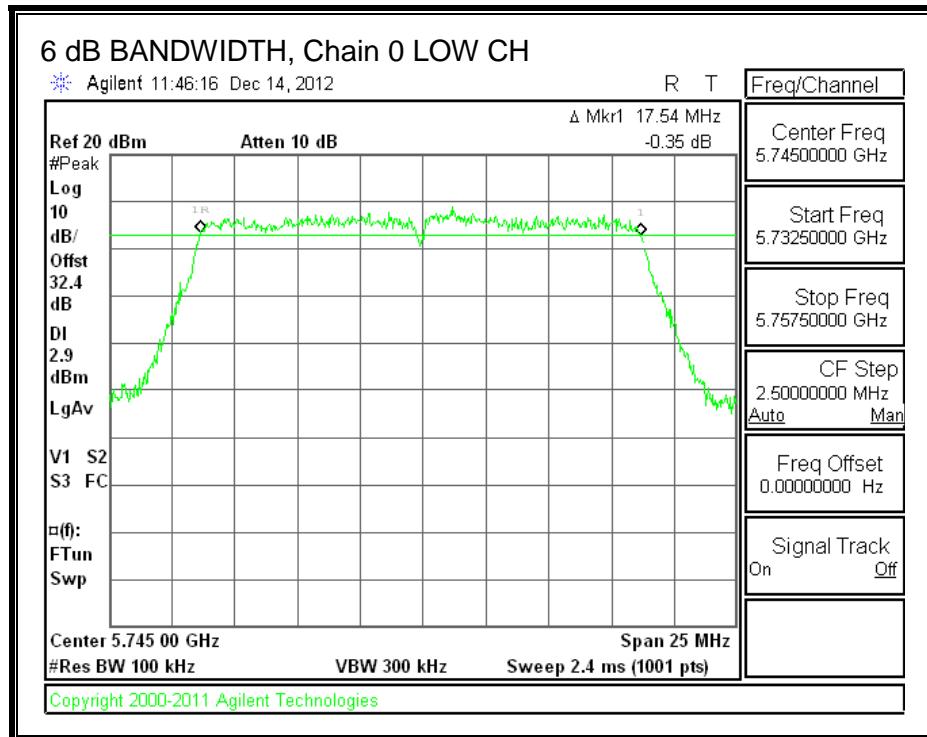


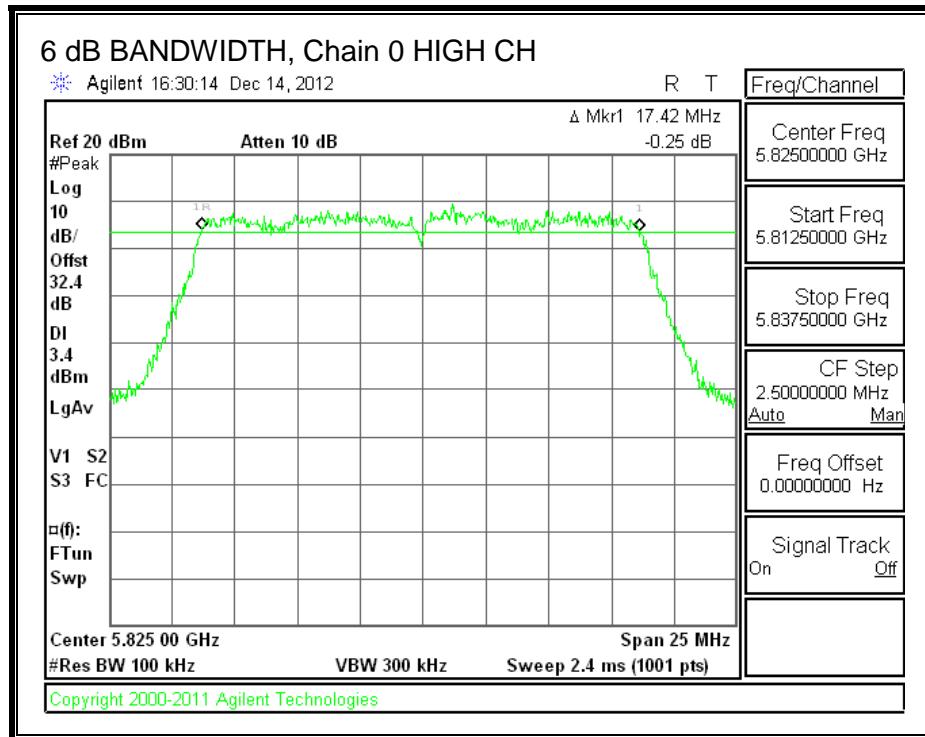



6 dB BANDWIDTH, Chain 1

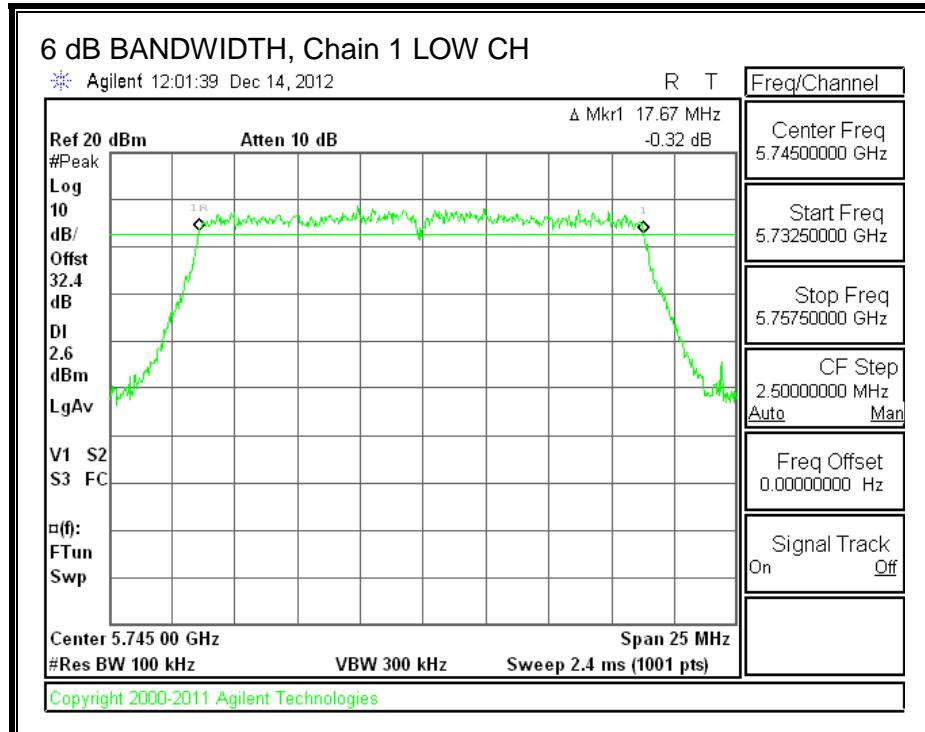

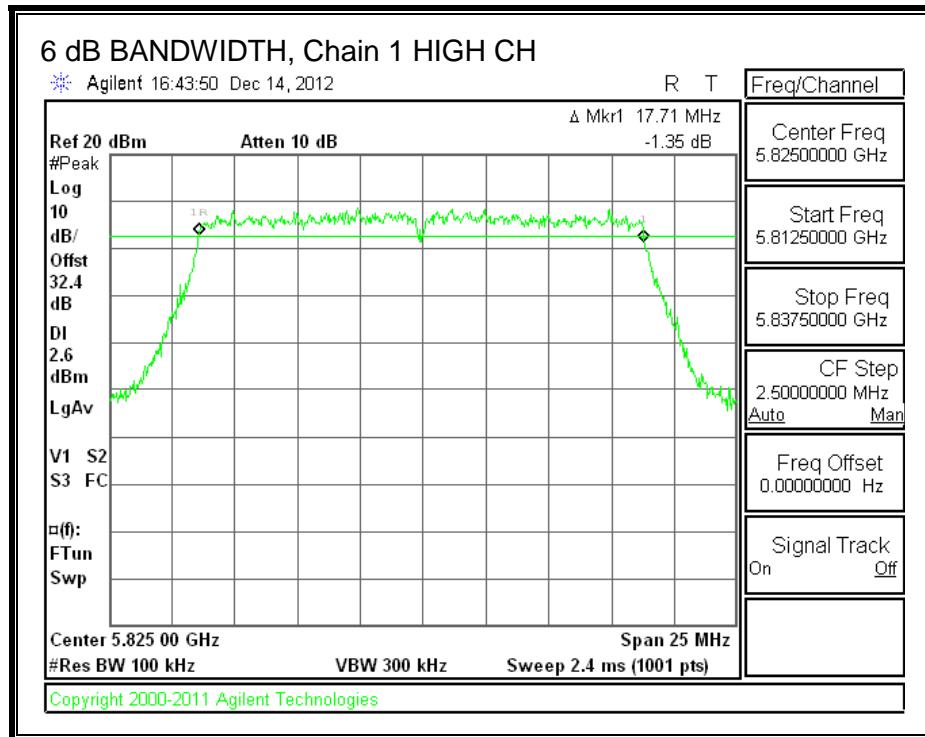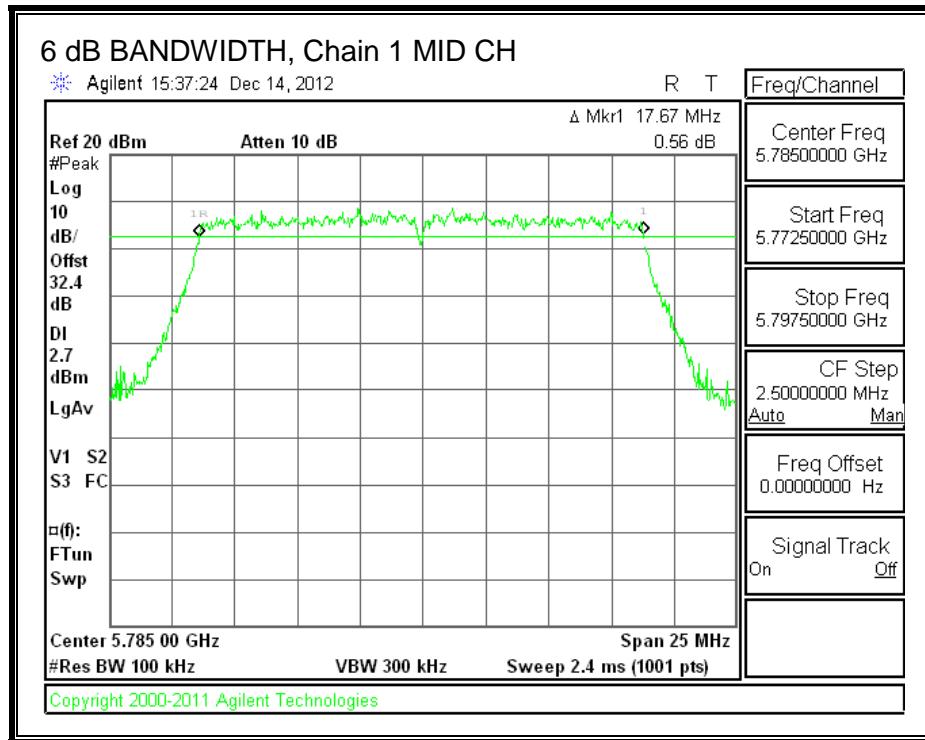

6 dB BANDWIDTH, Chain 2

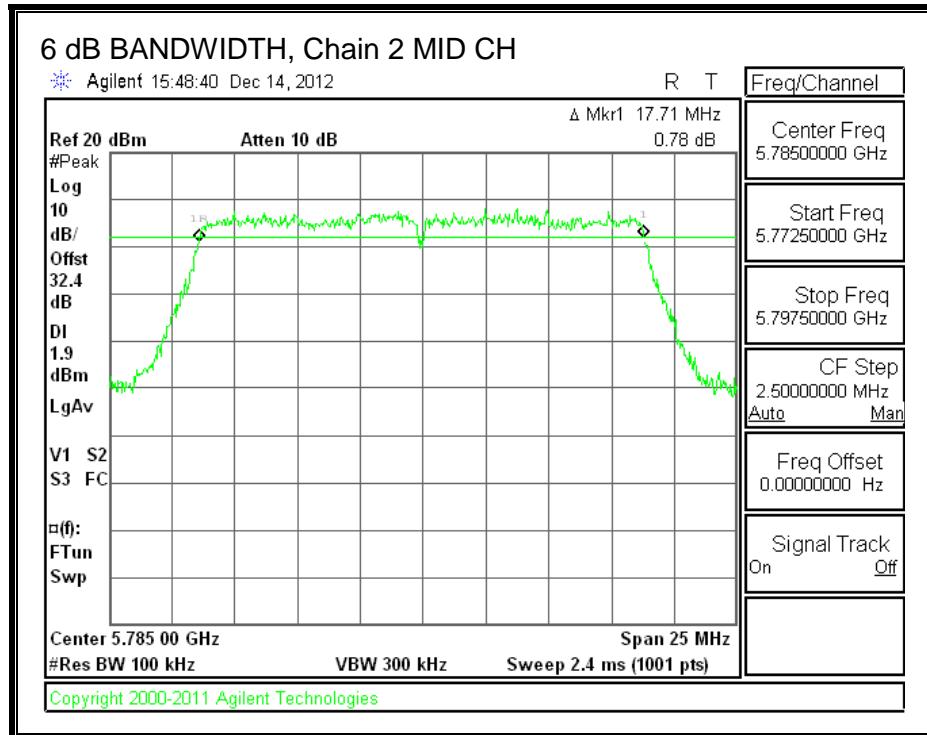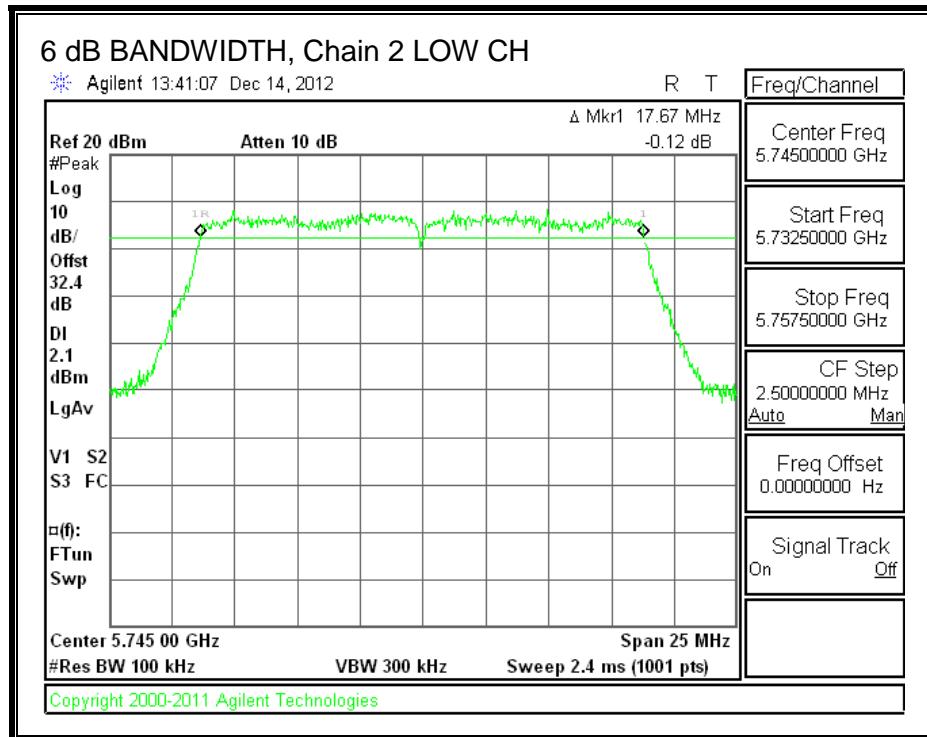

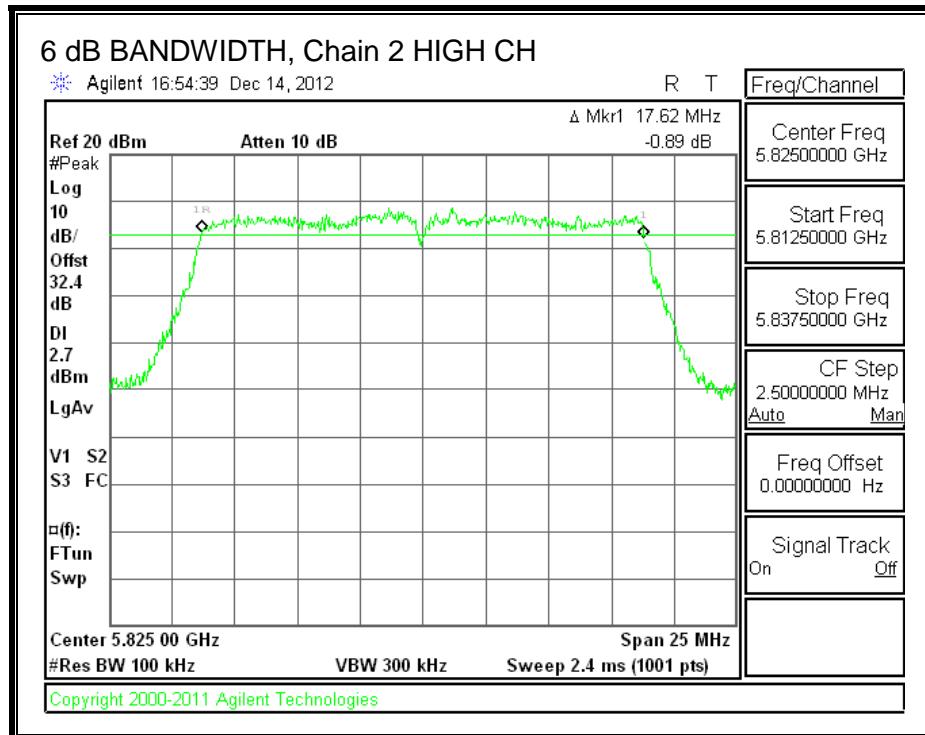

8.17.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Low | 5745 | 17.6747 | 17.6986 | 17.6900 |
| Mid | 5785 | 17.6914 | 17.6957 | 17.6913 |
| High | 5825 | 17.6796 | 17.6433 | 17.6859 |



99% BANDWIDTH, Chain 0

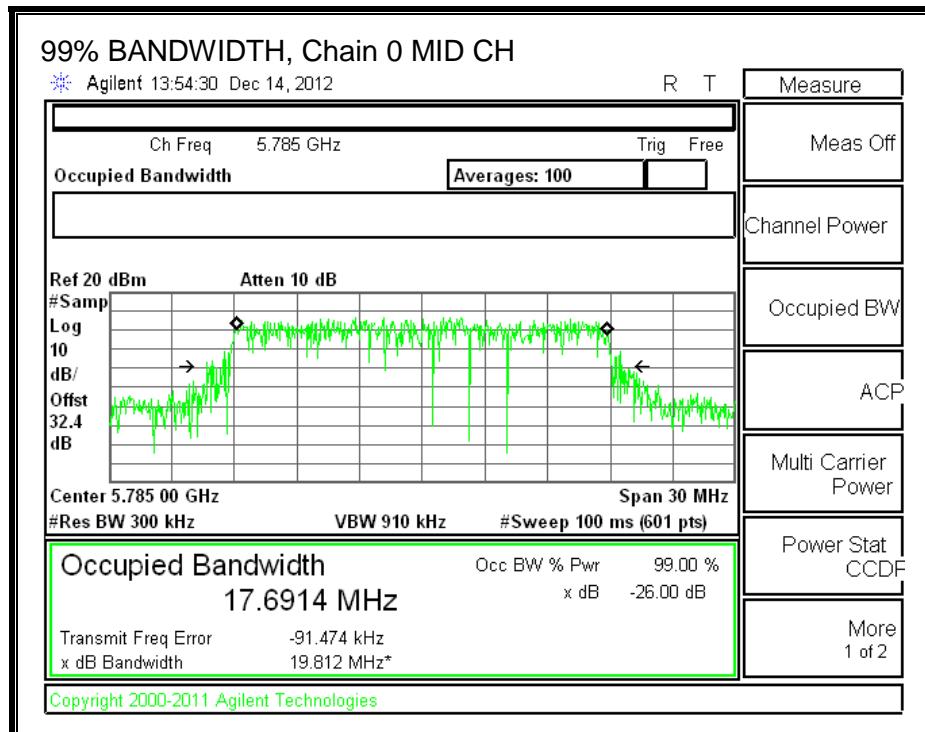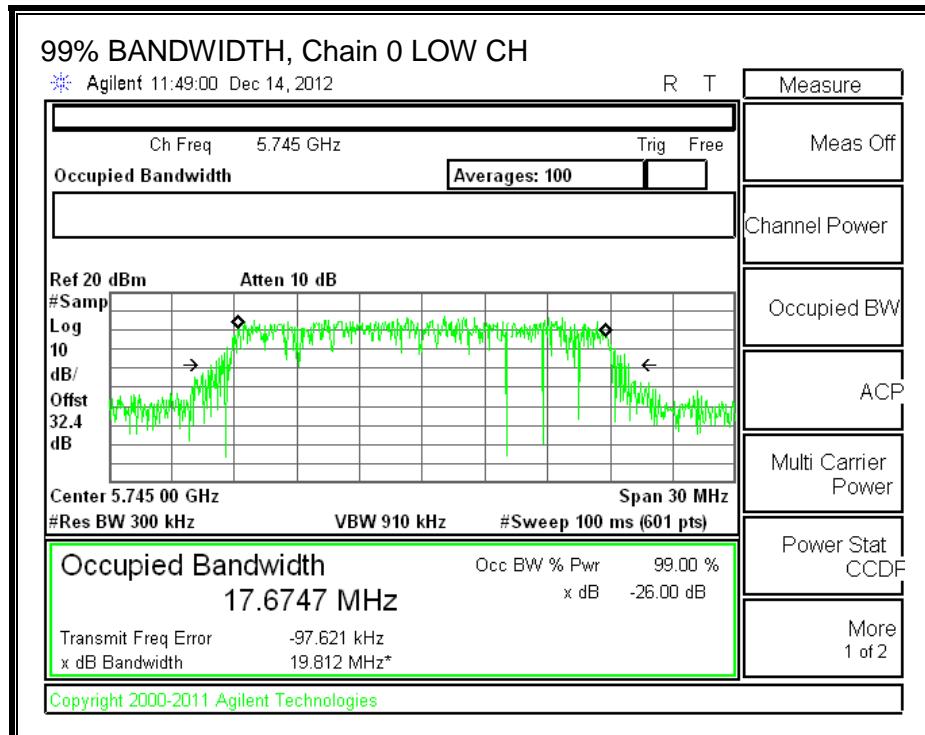


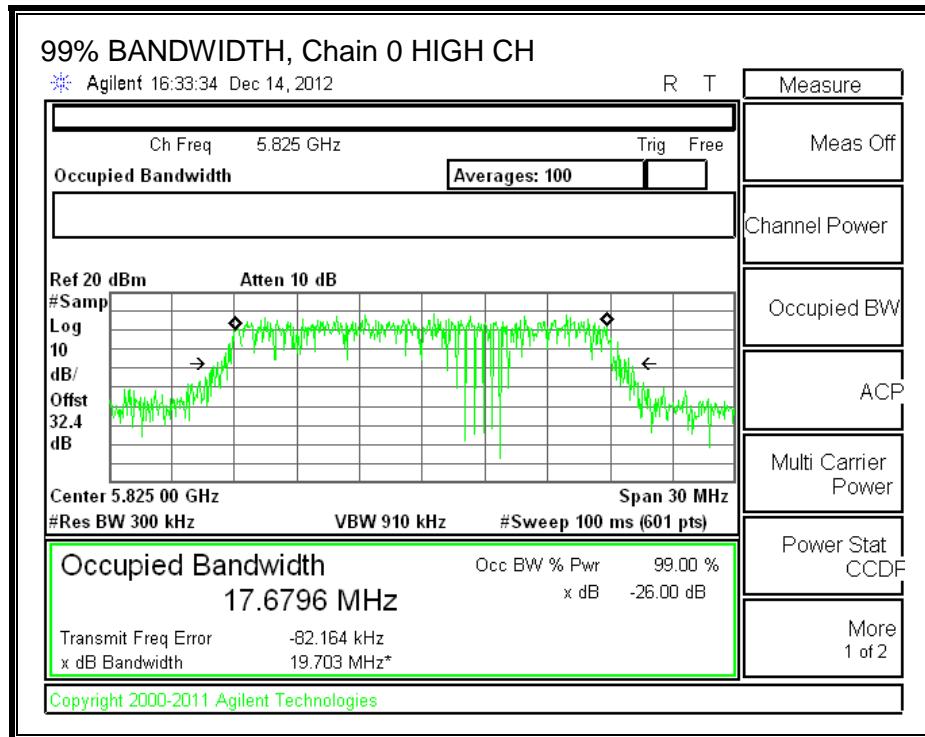



99% BANDWIDTH, Chain 1

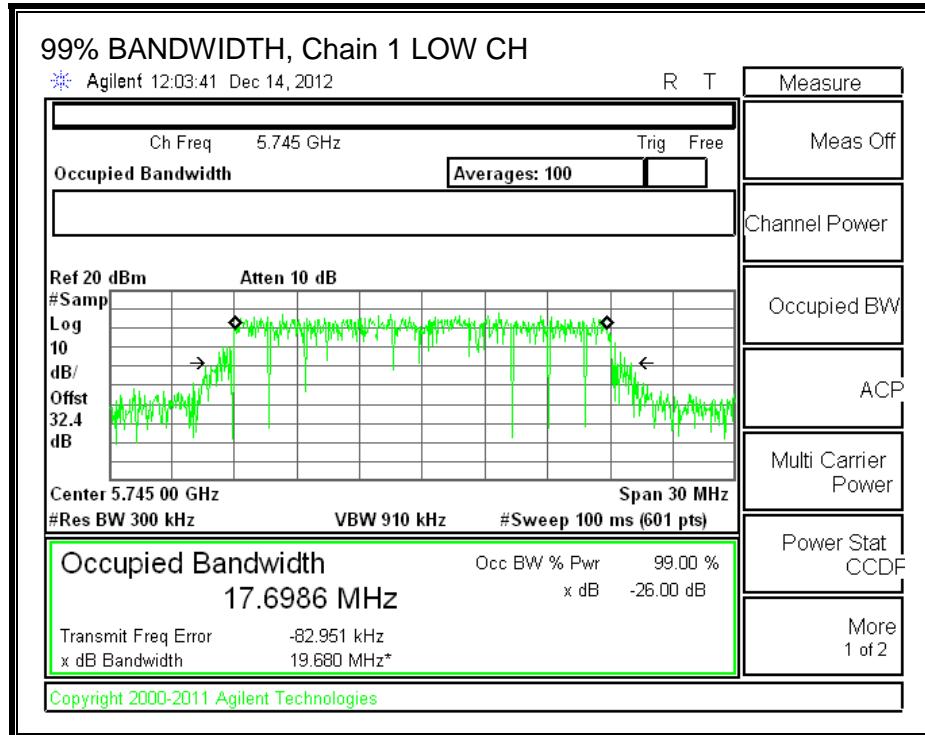

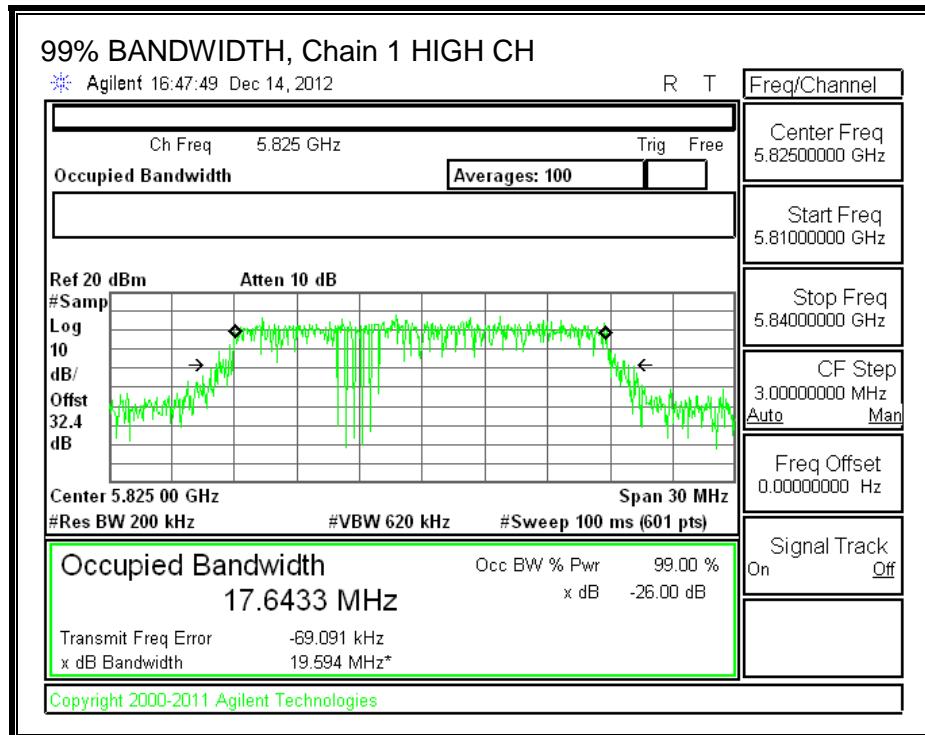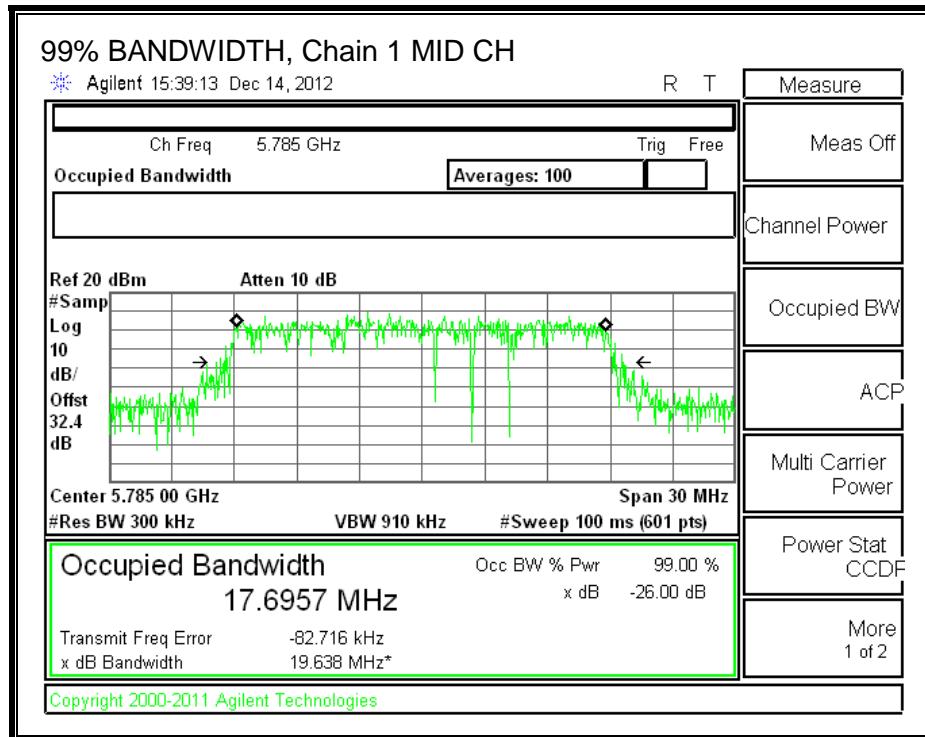

99% BANDWIDTH, Chain 2

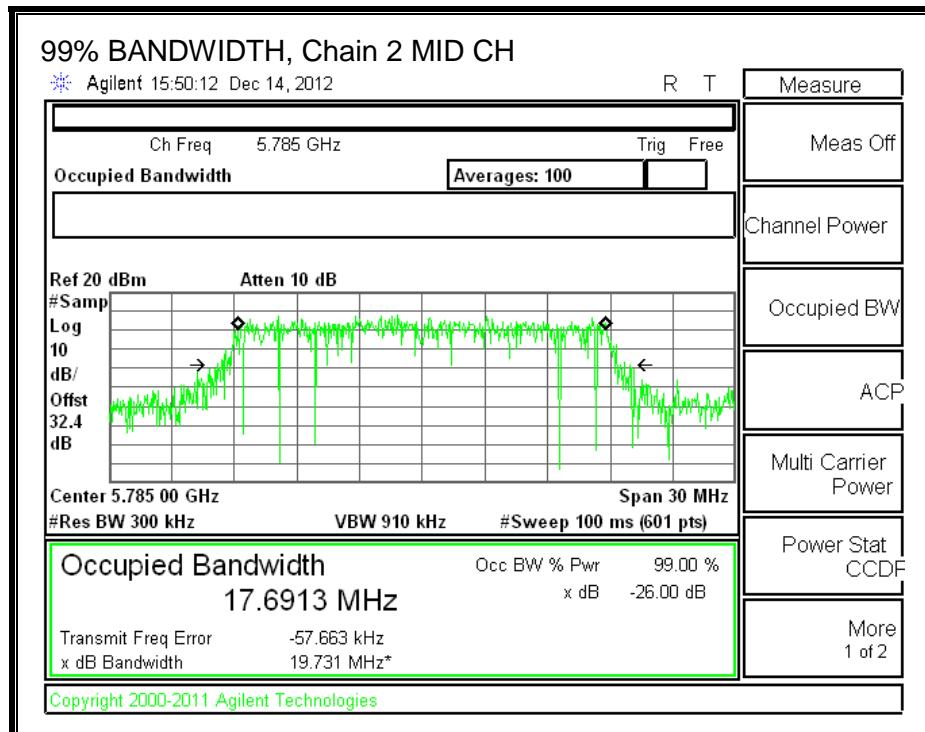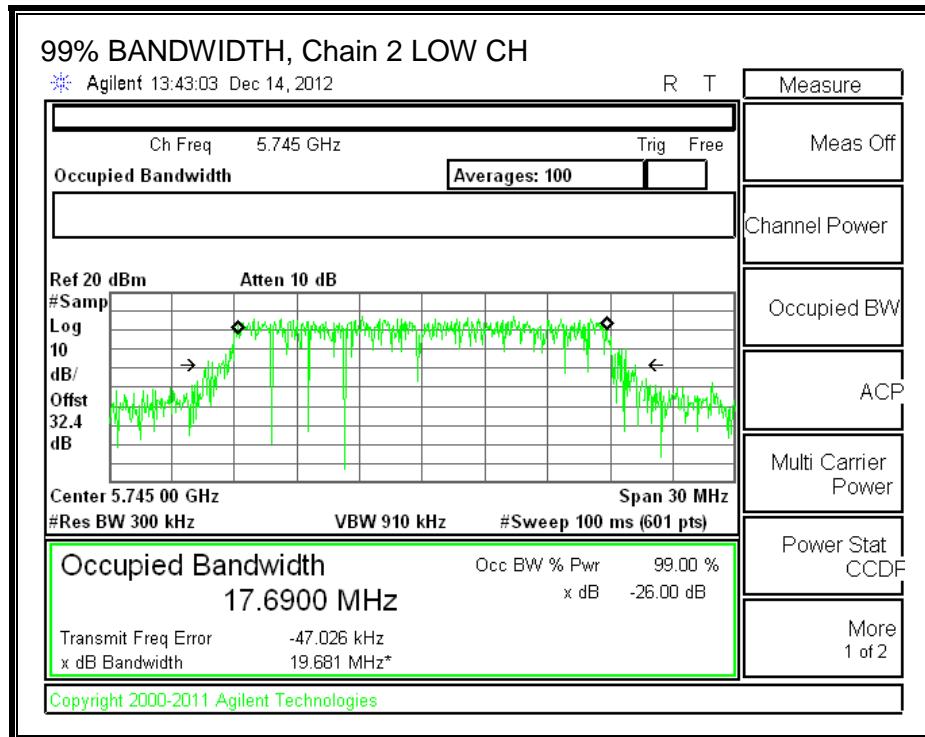

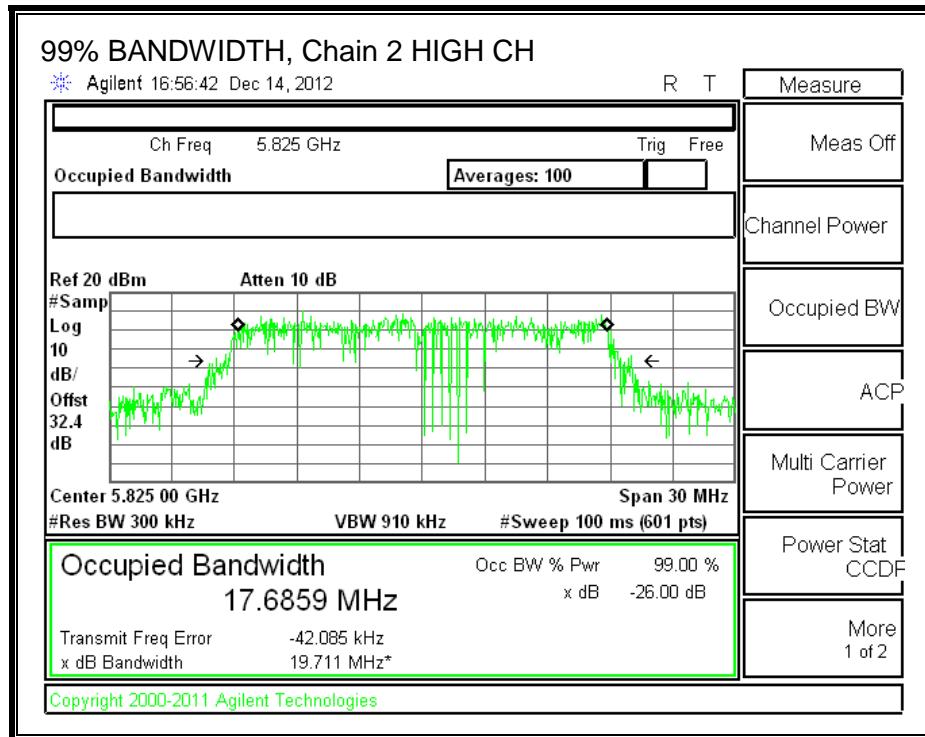

8.17.3. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Uncorrelated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 2.70 | 1.90 | 4.40 | 3.13 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 5745 | 3.13 | 30.00 | 30 | 36 | 30.00 |
| Mid | 5785 | 3.13 | 30.00 | 30 | 36 | 30.00 |
| High | 5825 | 3.13 | 30.00 | 30 | 36 | 30.00 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low | 5745 | 22.10 | 22.30 | 22.00 | 26.91 | 30.00 | -3.09 |
| Mid | 5785 | 24.80 | 25.20 | 24.90 | 29.74 | 30.00 | -0.26 |
| High | 5825 | 23.80 | 24.10 | 23.90 | 28.71 | 30.00 | -1.29 |

8.17.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-210 A8.2



The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


RESULTS

PSD Results


| Channel | Frequency (MHz) | Chain 0 Meas (dBm) | Chain 1 Meas (dBm) | Chain 2 Meas (dBm) | Total PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|--------------------------|--------------------------|--------------------------|-----------------------|----------------|----------------|
| Low | 5745 | 0.82 | 1.24 | 1.42 | 5.94 | 8.0 | -2.1 |
| Mid | 5785 | 0.69 | 1.89 | 3.01 | 6.74 | 8.0 | -1.3 |
| High | 5825 | -0.25 | 0.90 | 0.18 | 5.07 | 8.0 | -2.9 |



PSD, Chain 0

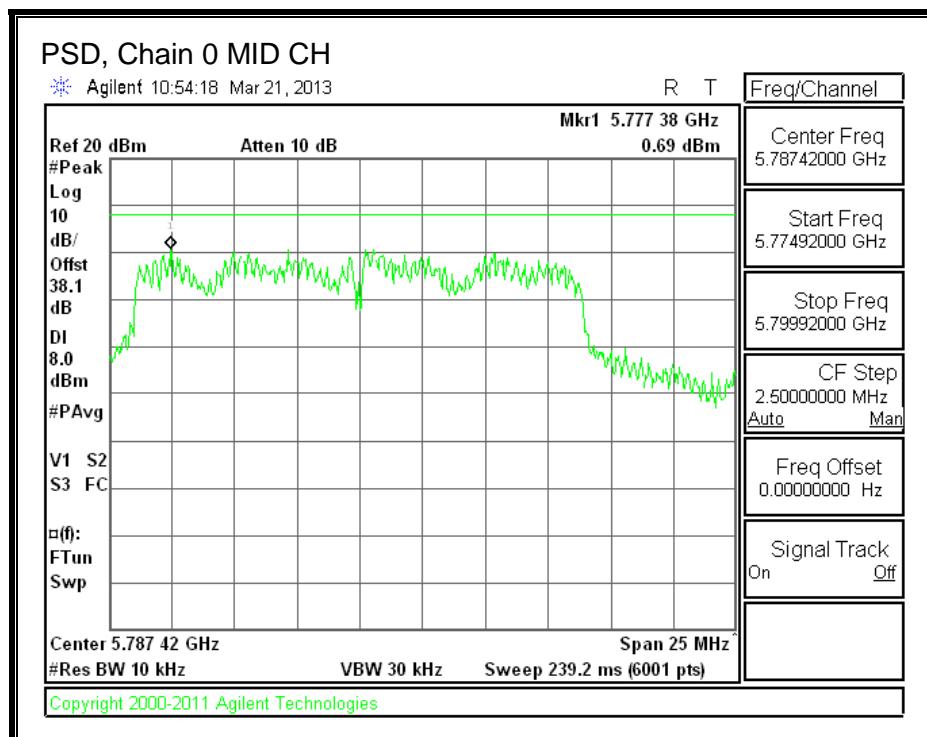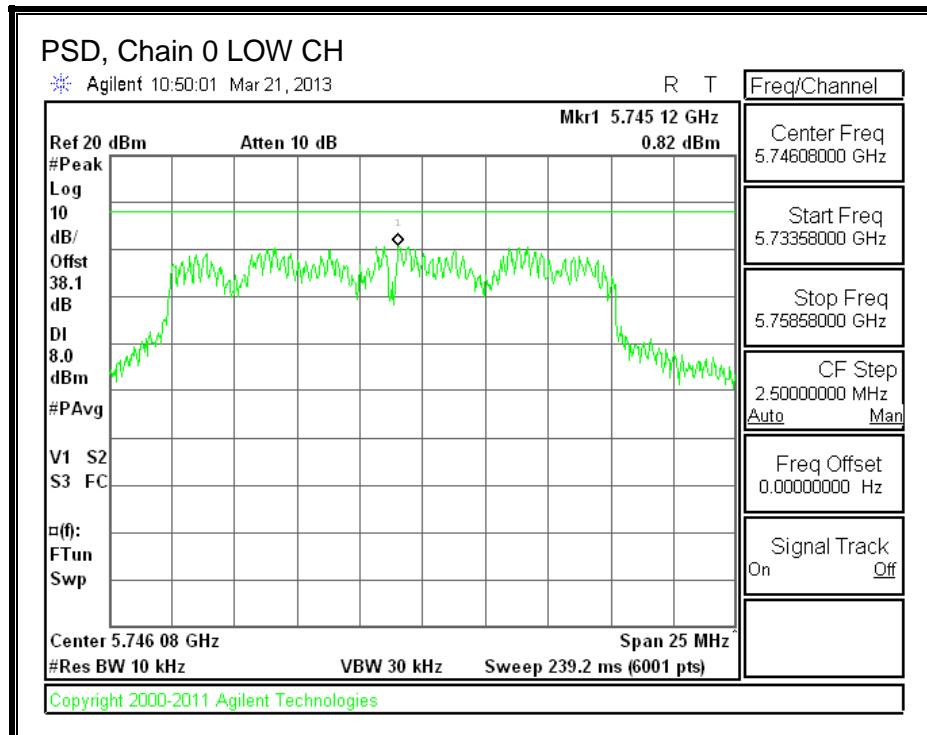


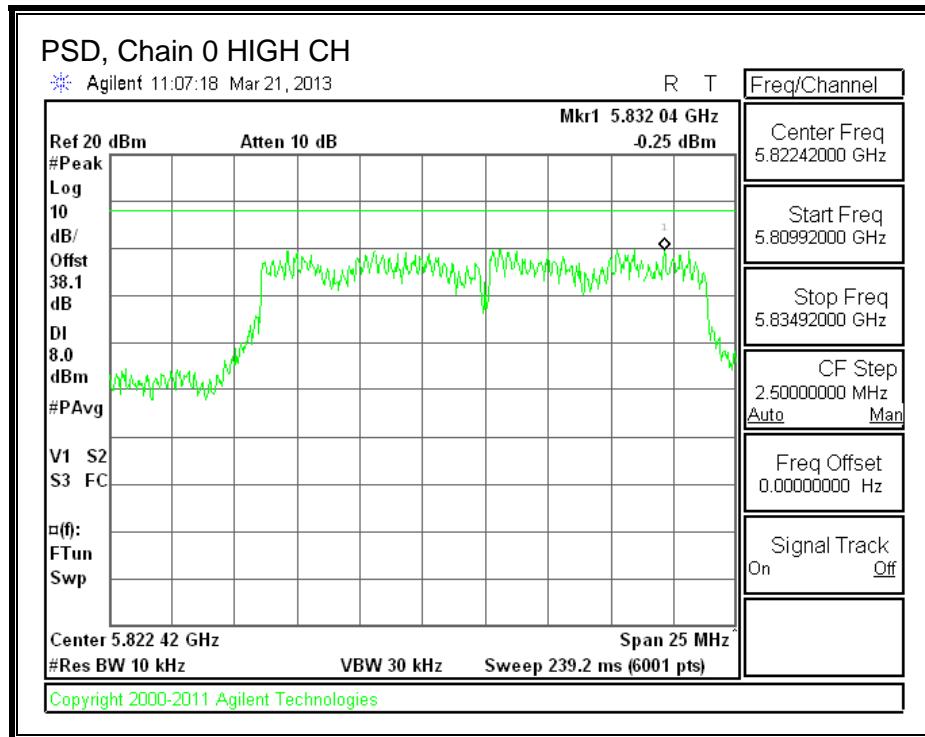



PSD, Chain 1

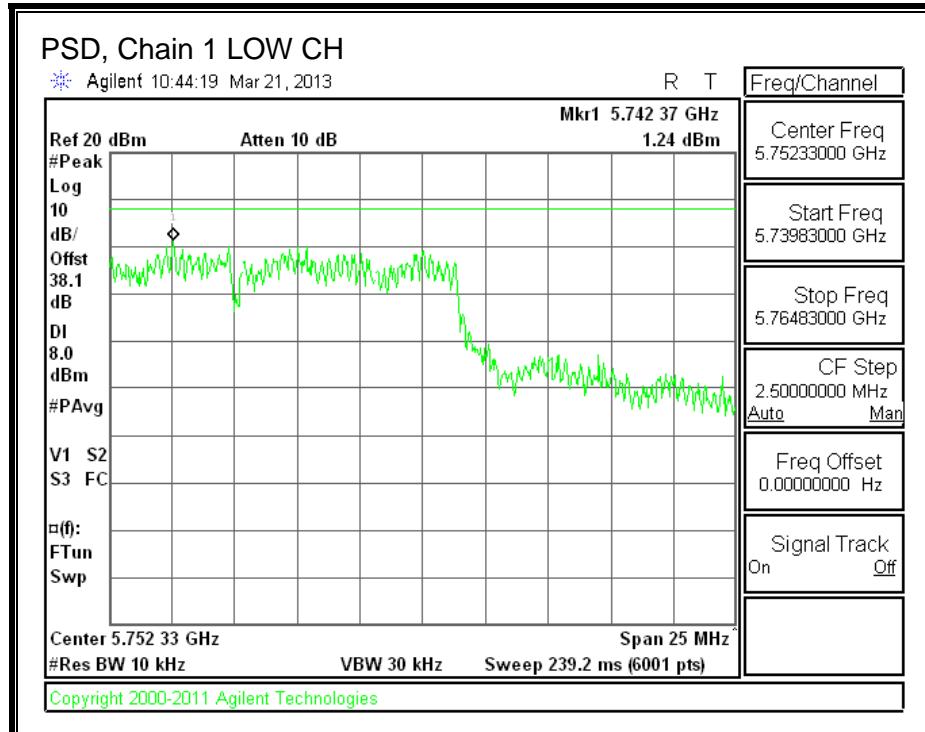

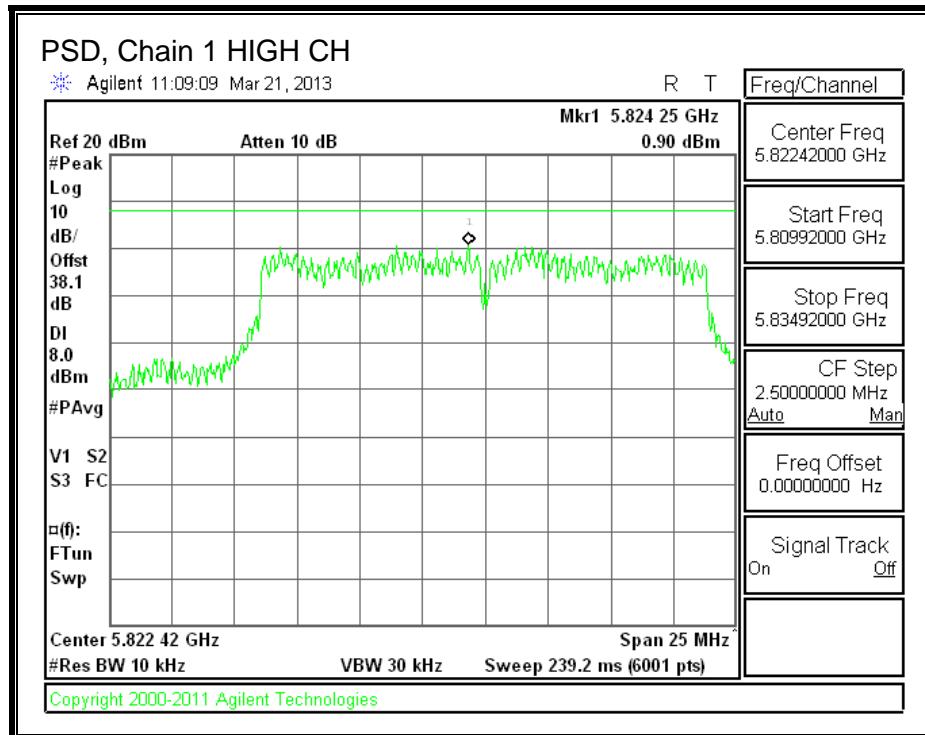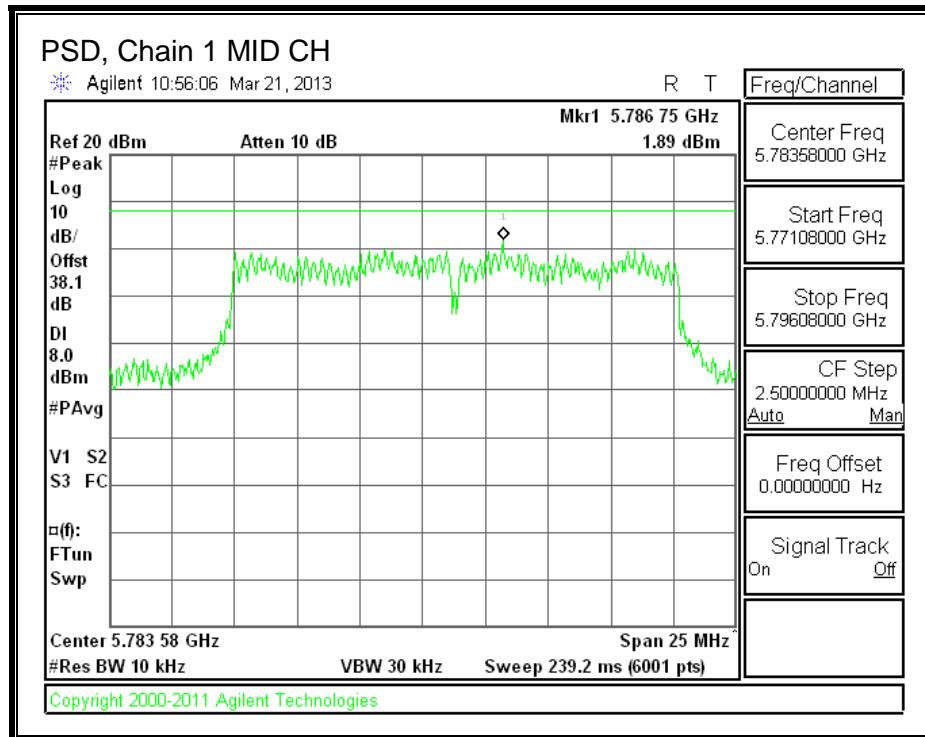

PSD, Chain 2

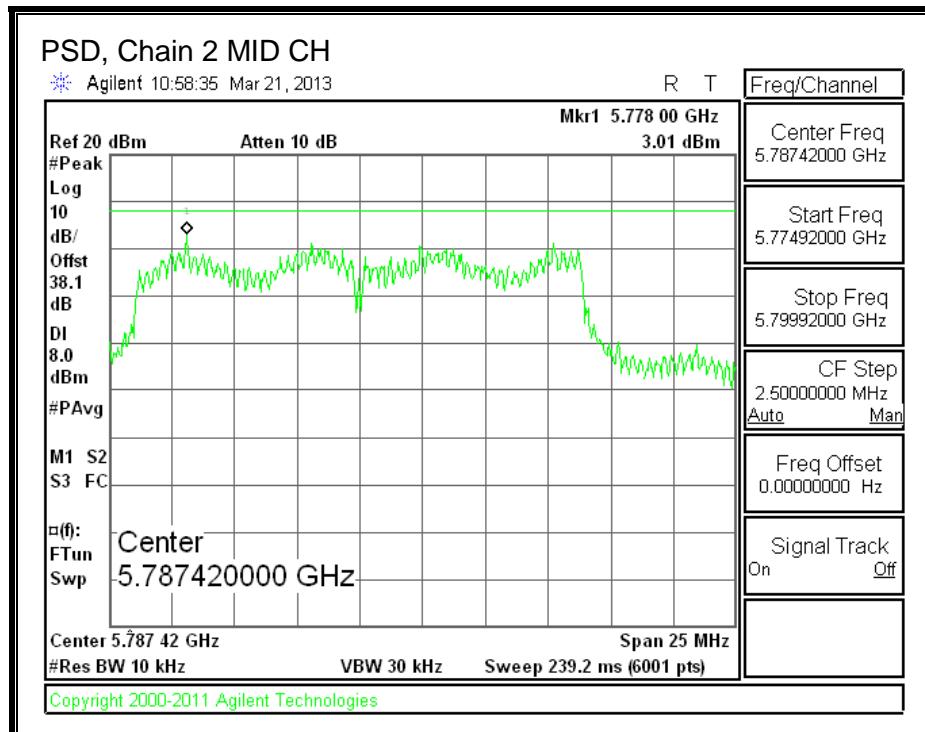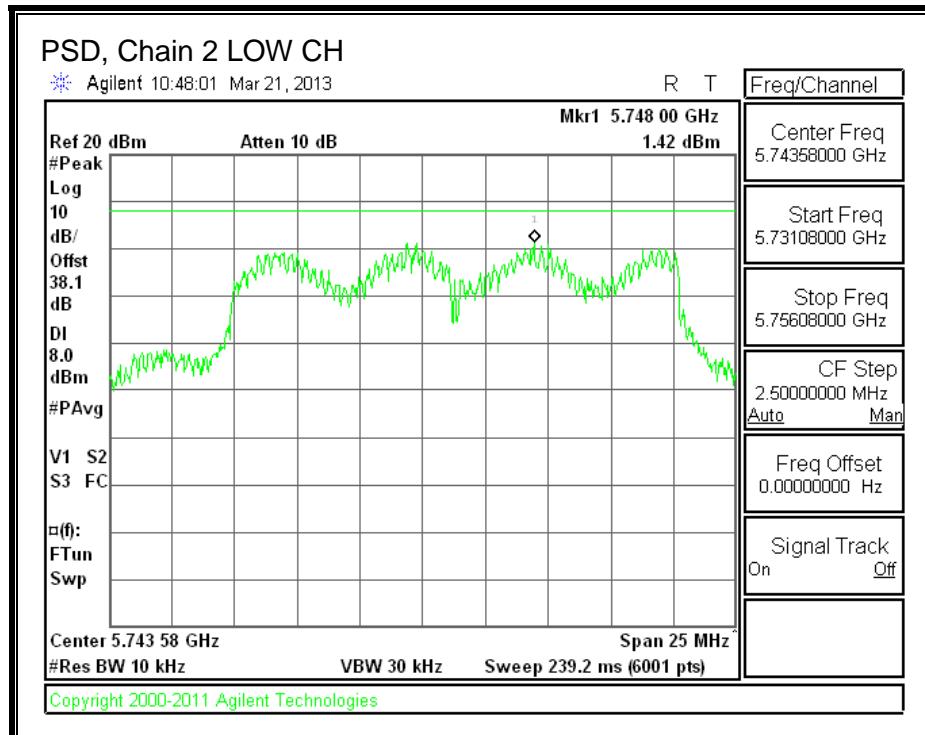

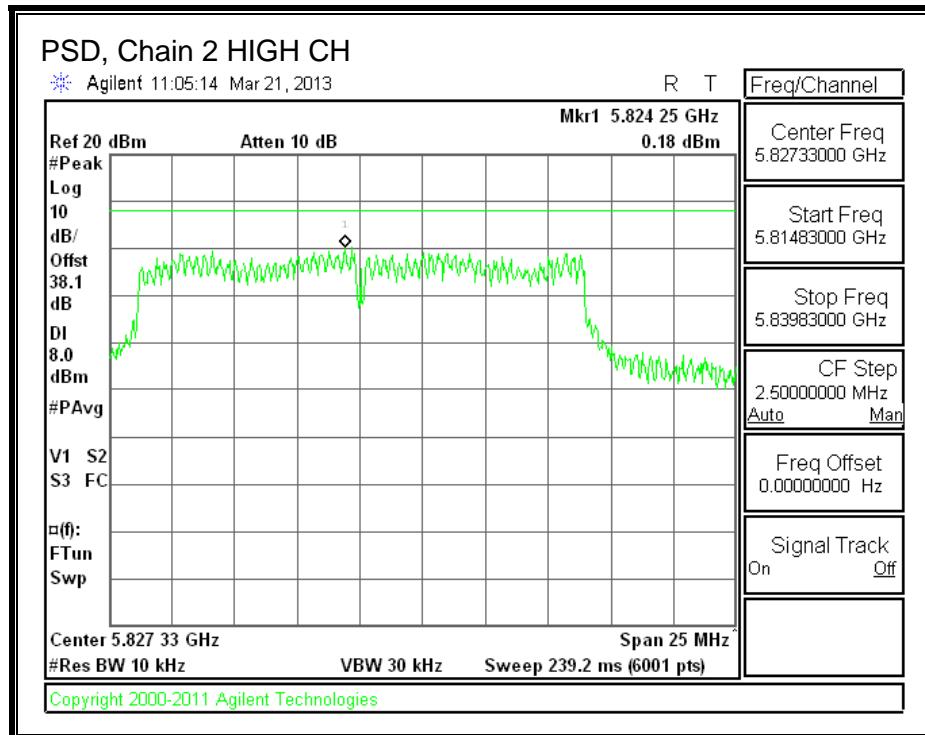

8.17.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-210 A8.5


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL, Chain 0

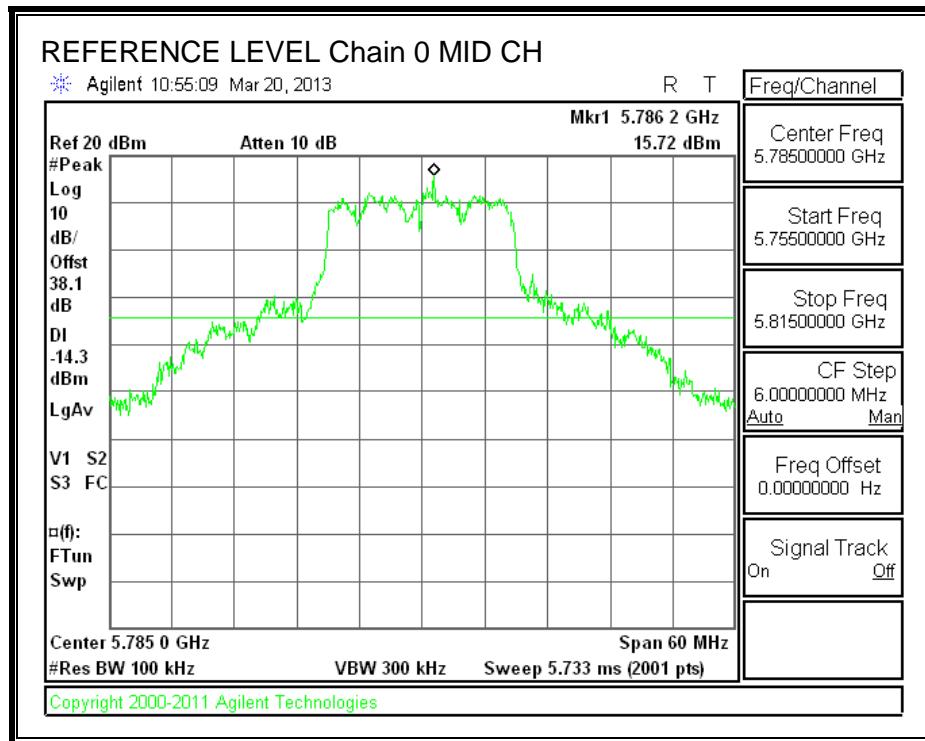



LOW CHANNEL BANDEDGE, Chain 0

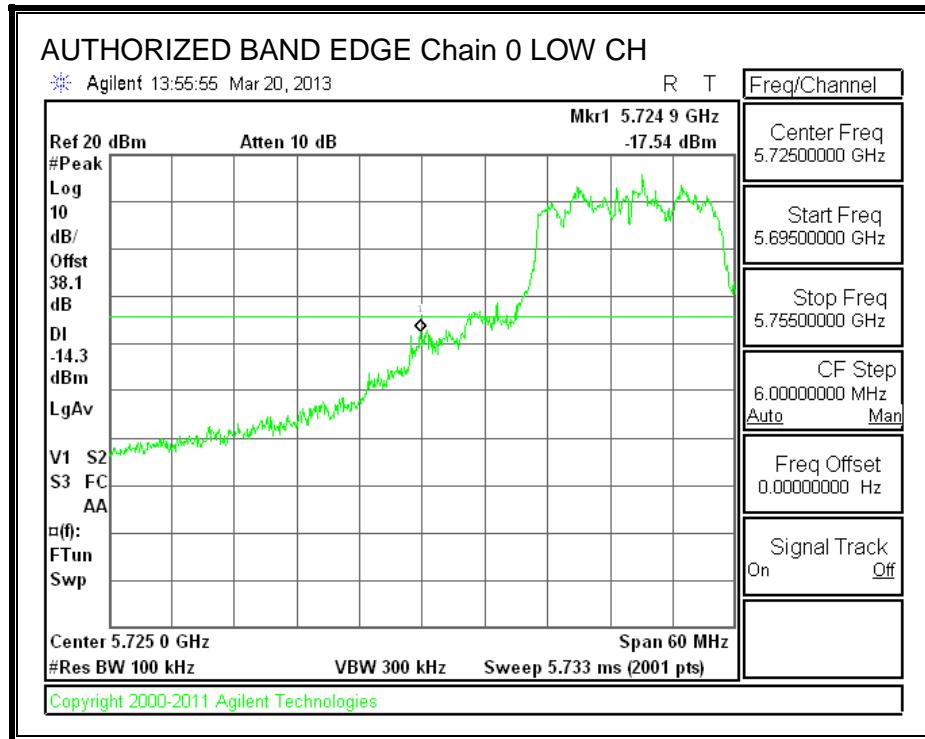


HIGH CHANNEL BANDEDGE, Chain 0

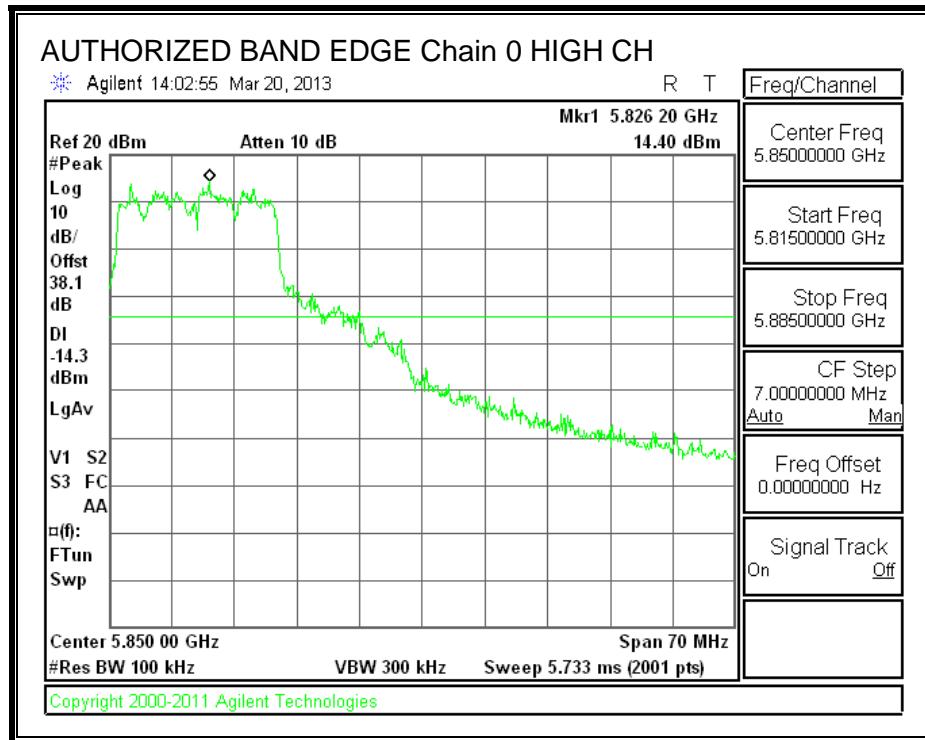


OUT-OF-BAND EMISSIONS, Chain 0

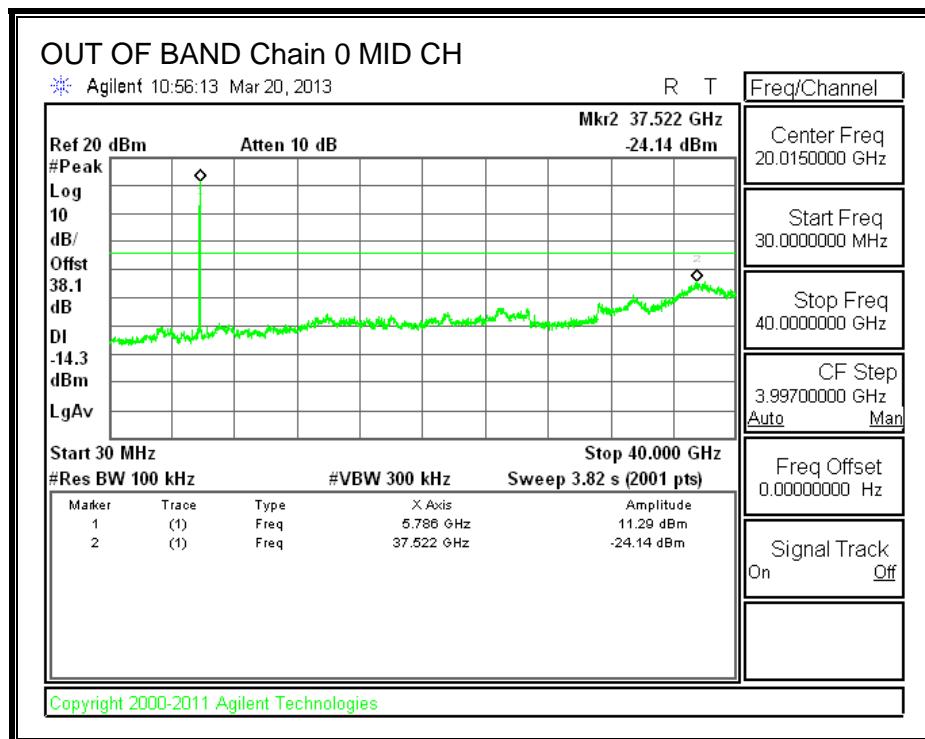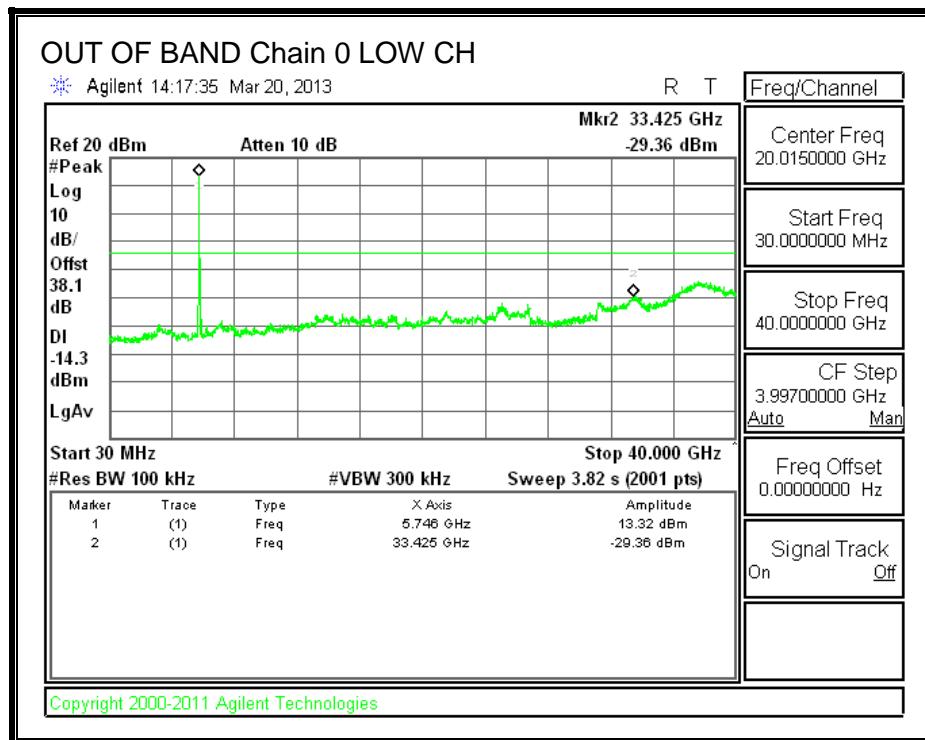


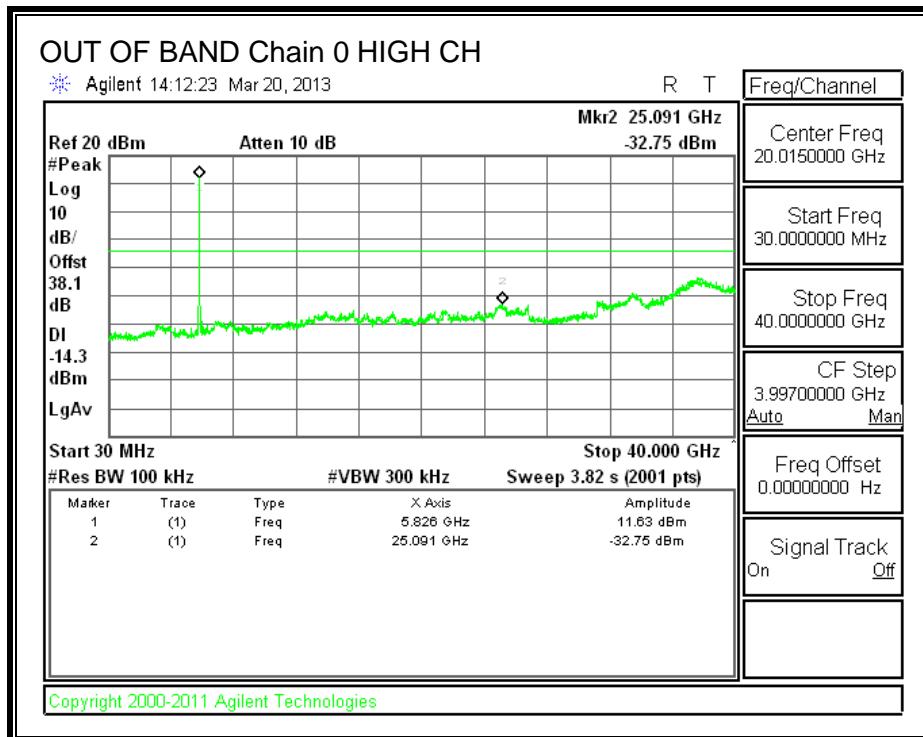


IN-BAND REFERENCE LEVEL, Chain 1

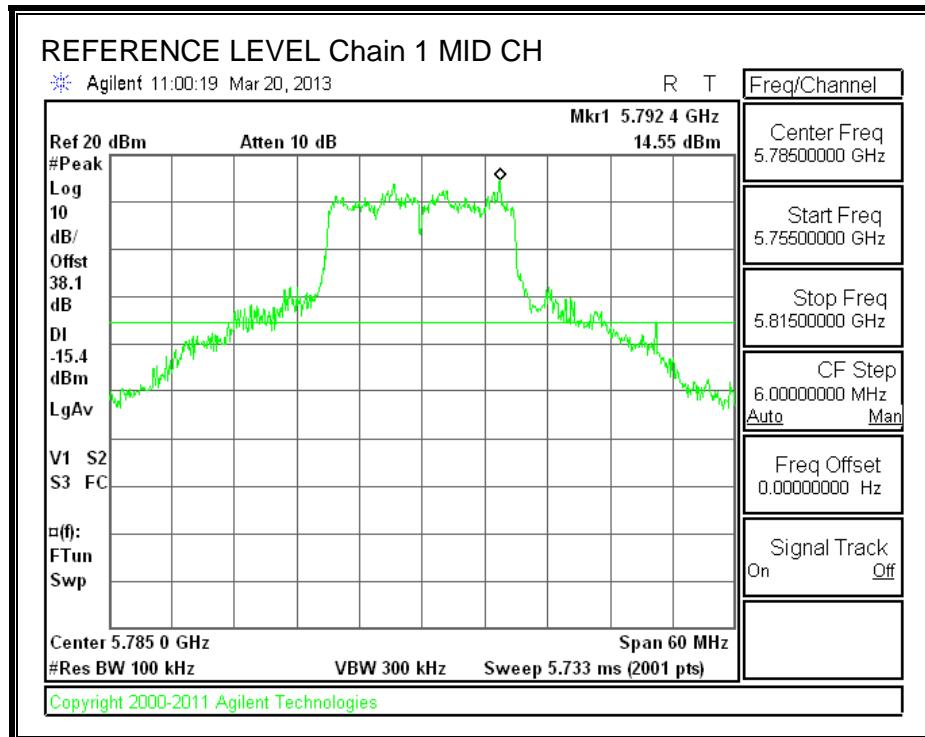



LOW CHANNEL BANDEDGE, Chain 1

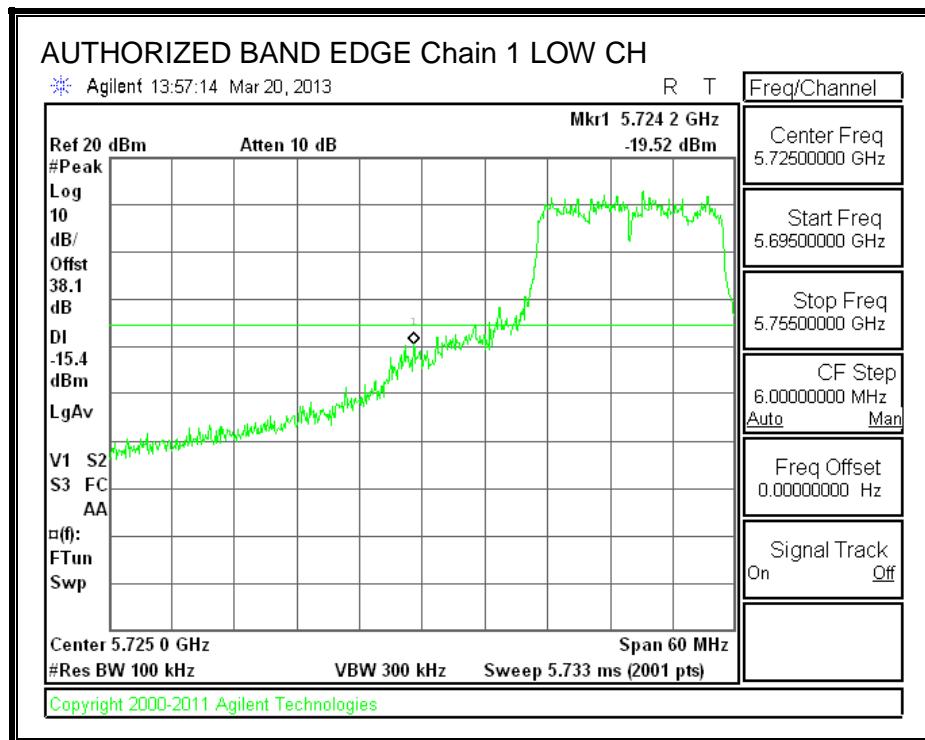


HIGH CHANNEL BANDEDGE, Chain 1

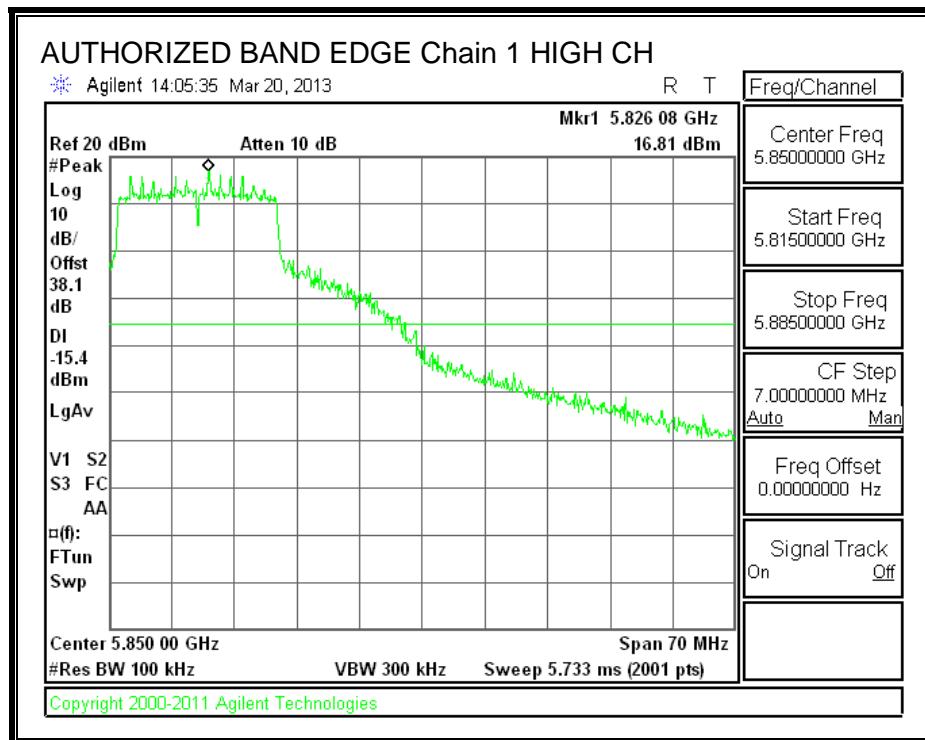


OUT-OF-BAND EMISSIONS, Chain 1

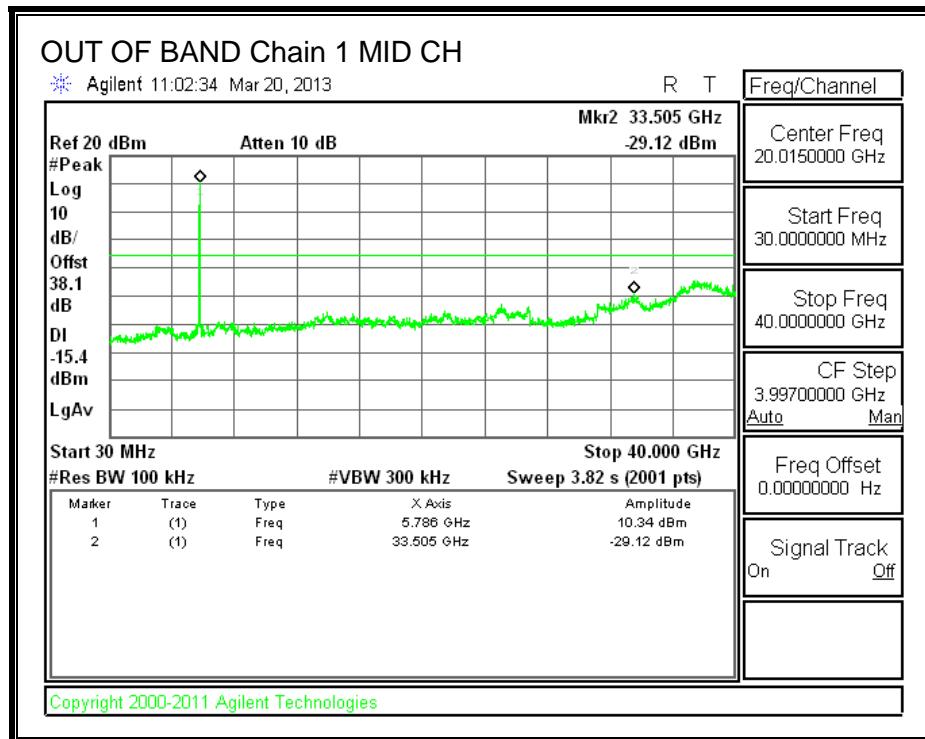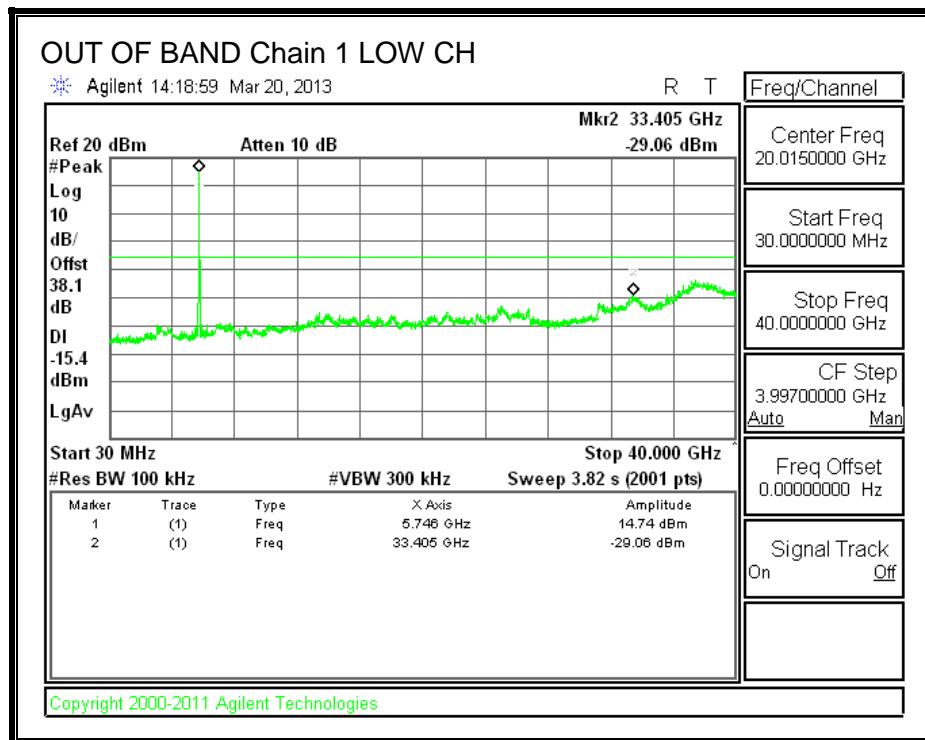


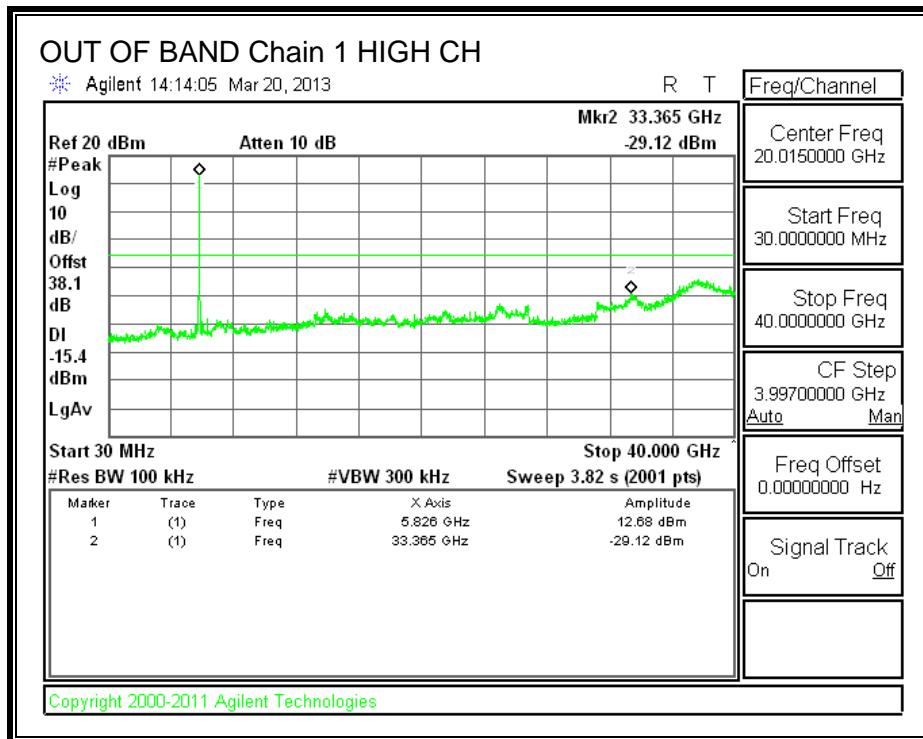


IN-BAND REFERENCE LEVEL, Chain 2

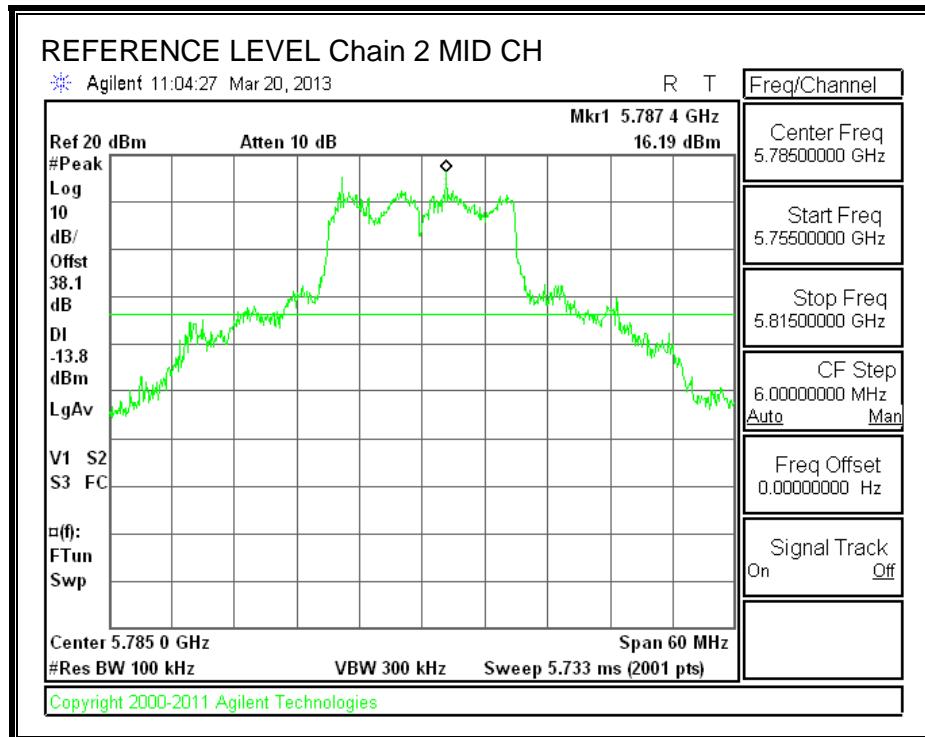



LOW CHANNEL BANDEDGE, Chain 2

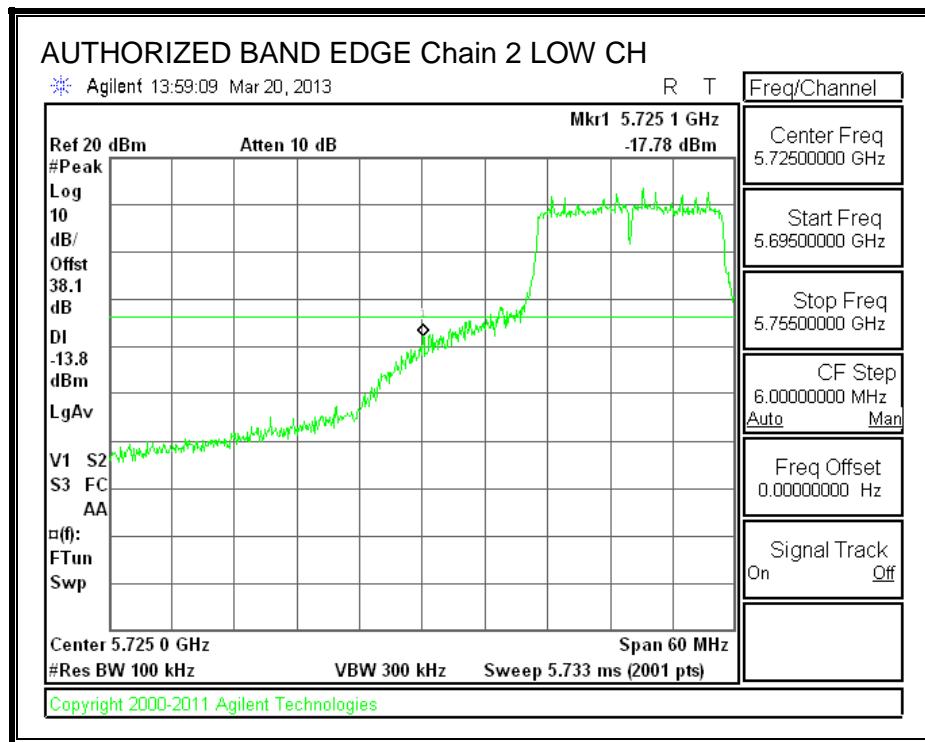


HIGH CHANNEL BANDEDGE, Chain 2

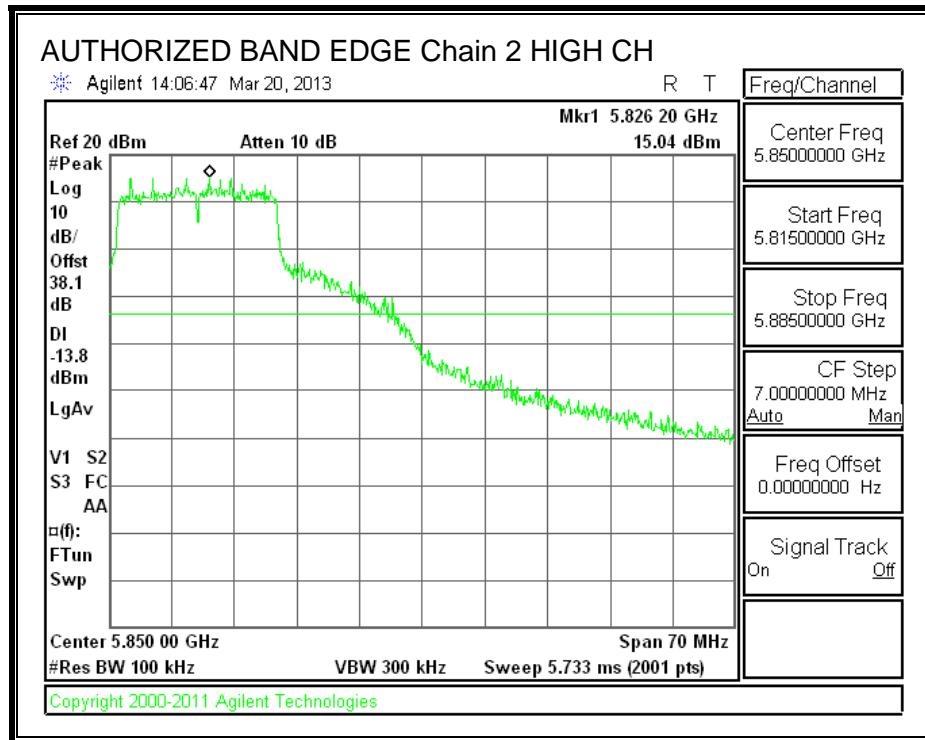

OUT-OF-BAND EMISSIONS, Chain 2

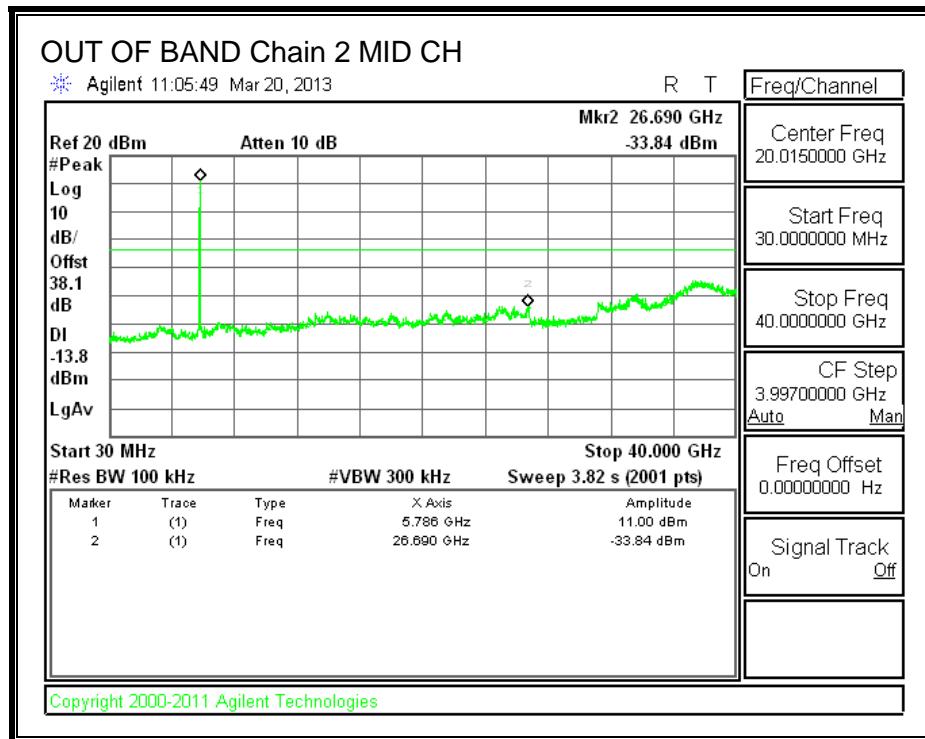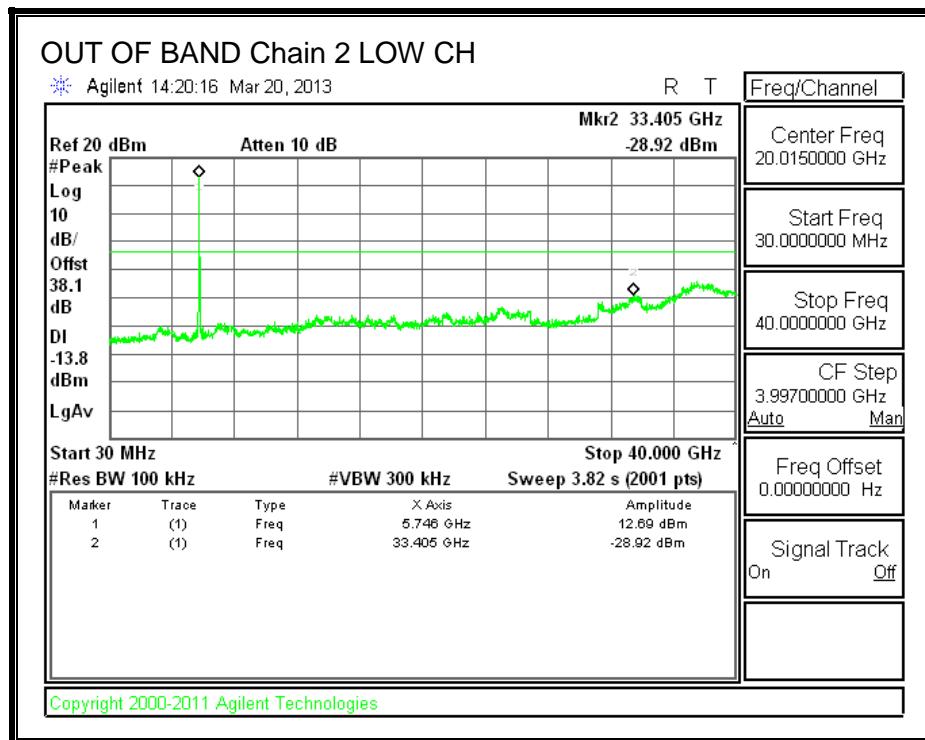

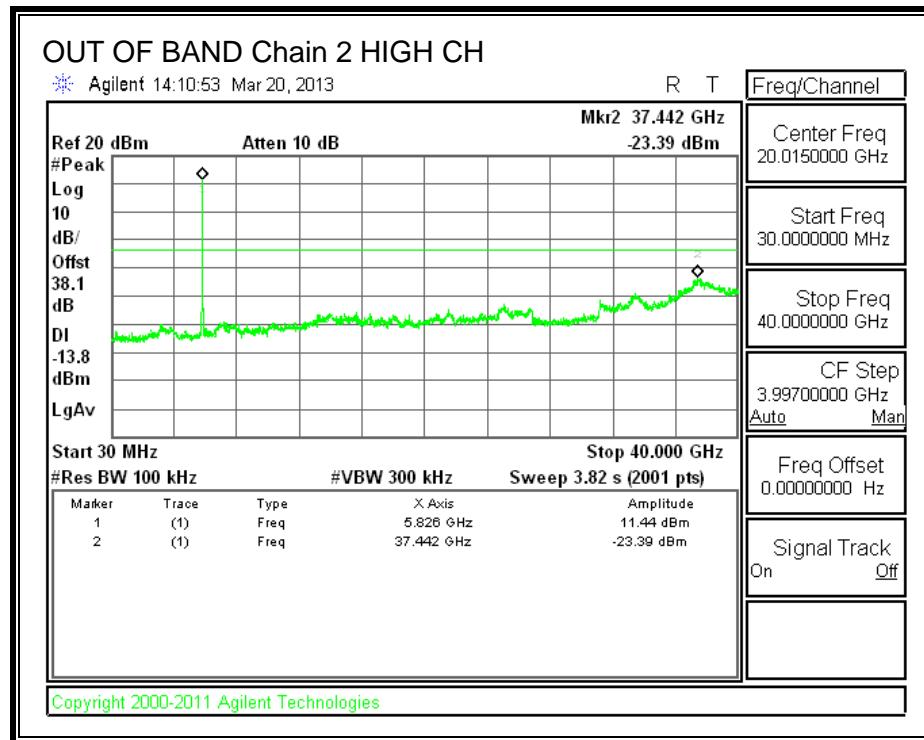

8.18. 802.11n HT40 1TX MODE IN THE 5.8 GHz BAND

Covered by testing 11n HT40 CDD 3TX, power per chain used in the 802.11n HT40 CDD 3TX mode is equal to the power per chain that will be used for 802.11n HT40 1TX.

8.19. 802.11n HT40 CDD 2TX MODE IN THE 5.8 GHz BAND

Covered by testing 11n HT40 CDD 3TX, power per chain used in the 802.11n HT40 CDD 3TX mode is equal to the power per chain that will be used for 802.11n HT40 2TX.

8.20. 802.11n HT40 CDD 3TX MODE IN THE 5.8 GHz BAND

8.20.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS

| Channel | Frequency (MHz) | 6 dB BW Chain 0 (MHz) | 6 dB BW Chain 1 (MHz) | 6 dB BW Chain 2 (MHz) | Minimum Limit (MHz) |
|---------|--------------------|-----------------------------|-----------------------------|-----------------------------|---------------------------|
| Low | 5755 | 36.50 | 36.42 | 36.50 | 0.5 |
| High | 5795 | 36.42 | 36.42 | 36.42 | 0.5 |



6 dB BANDWIDTH, Chain 0

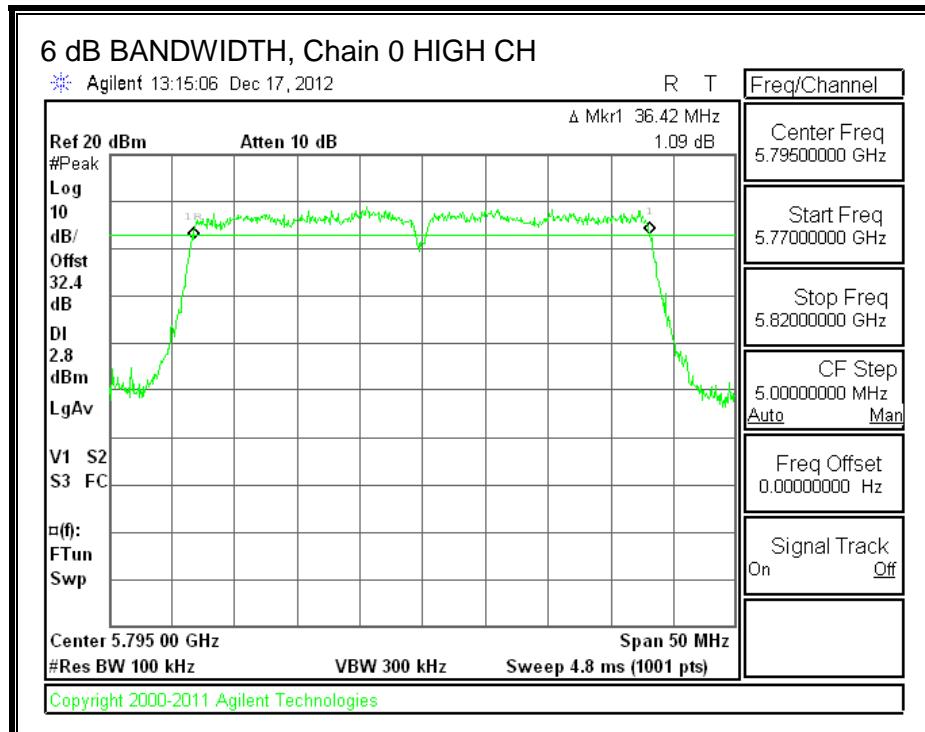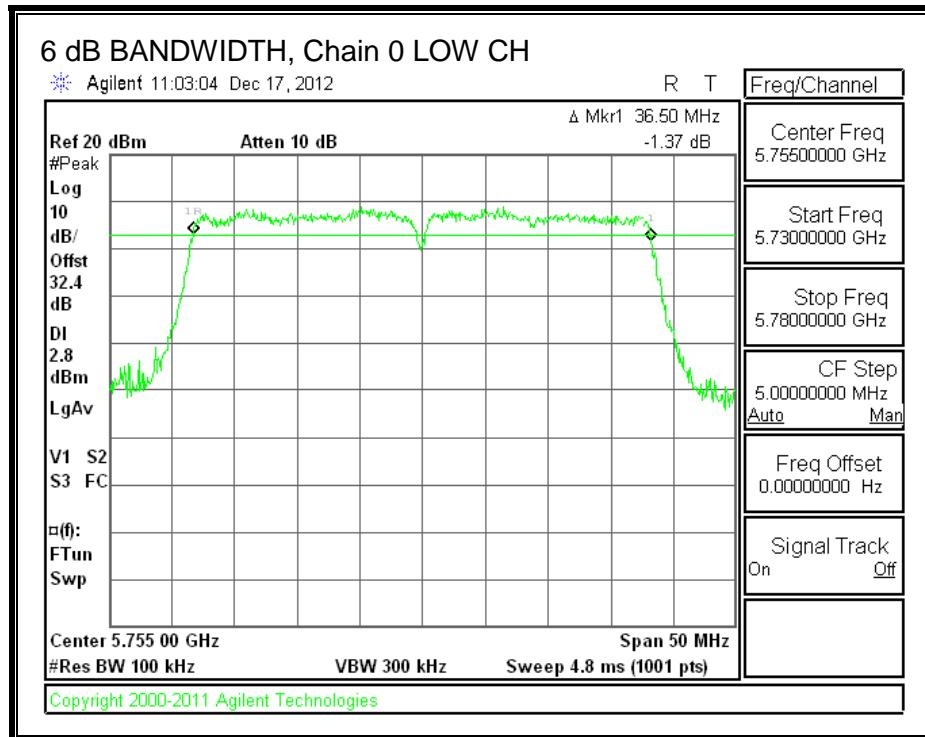

6 dB BANDWIDTH, Chain 1

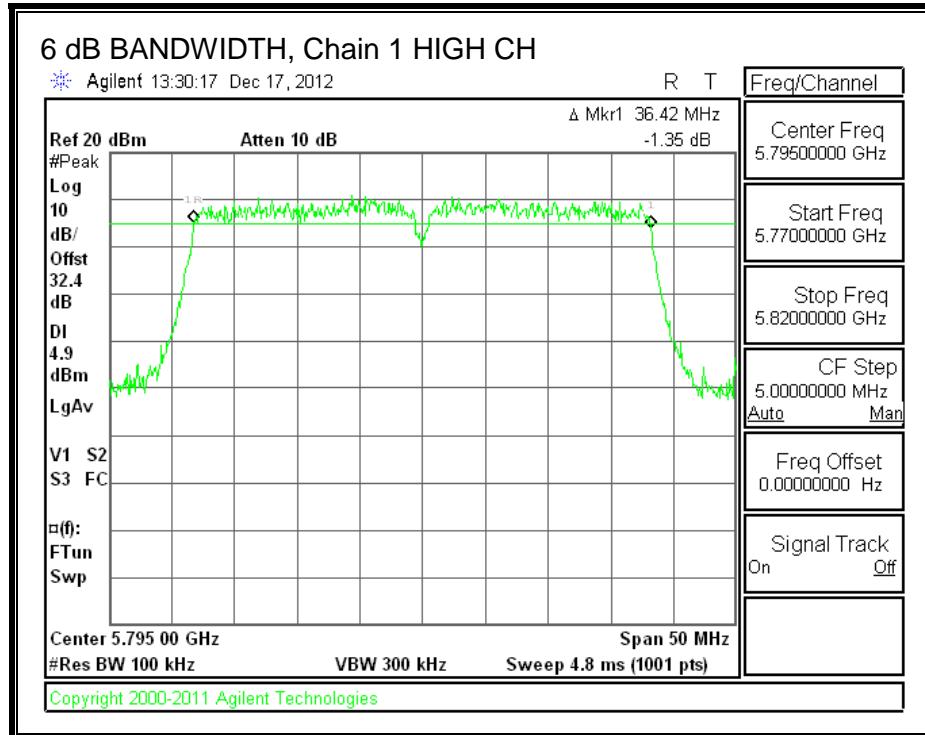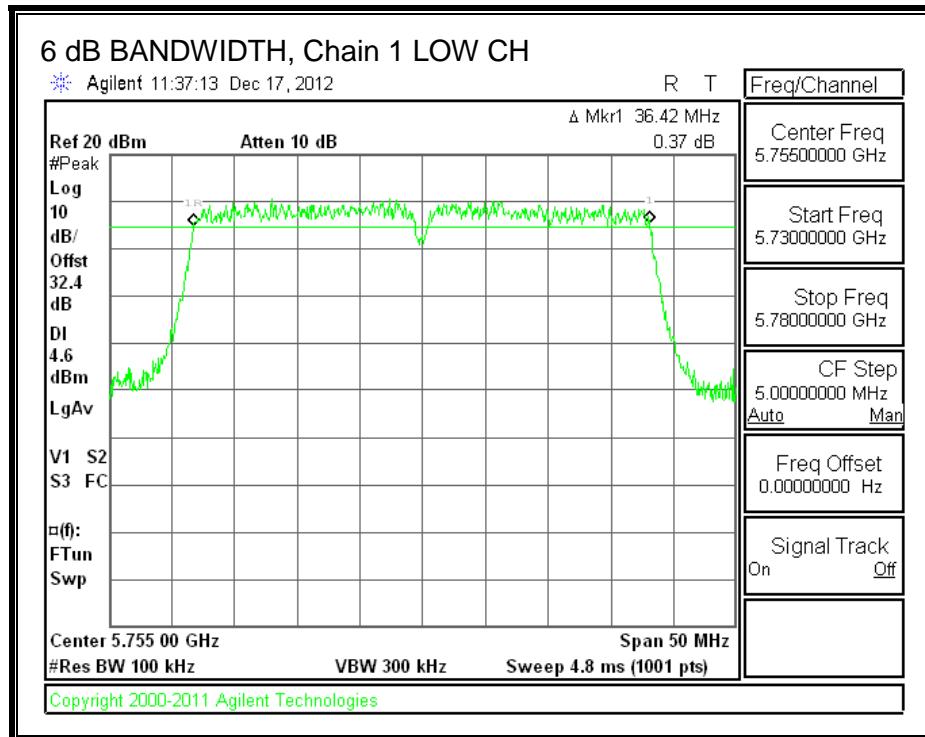

6 dB BANDWIDTH, Chain 2

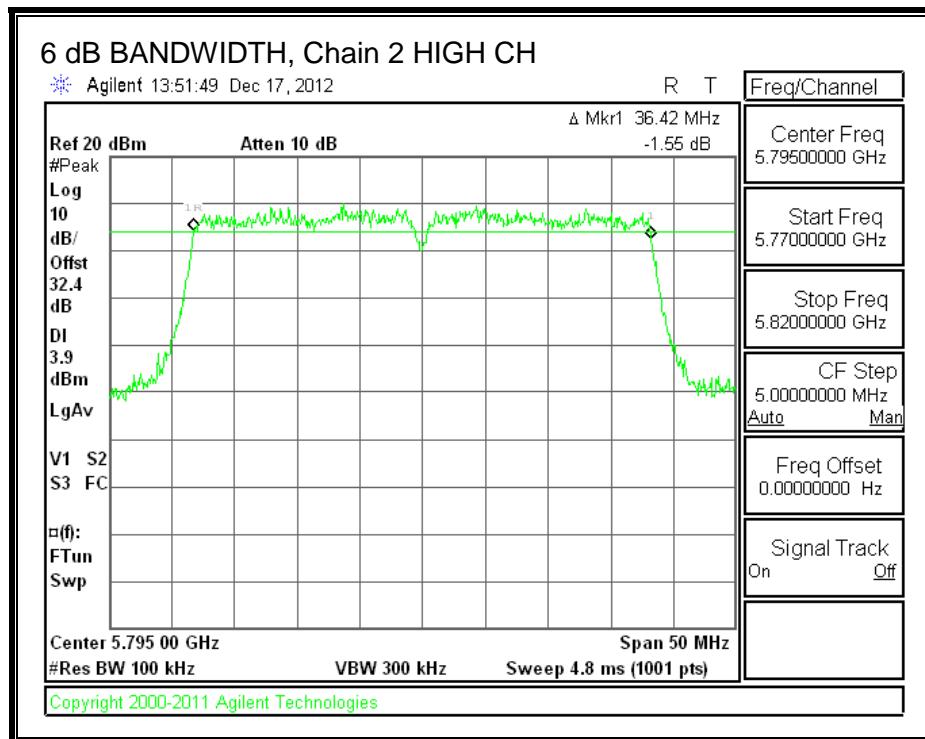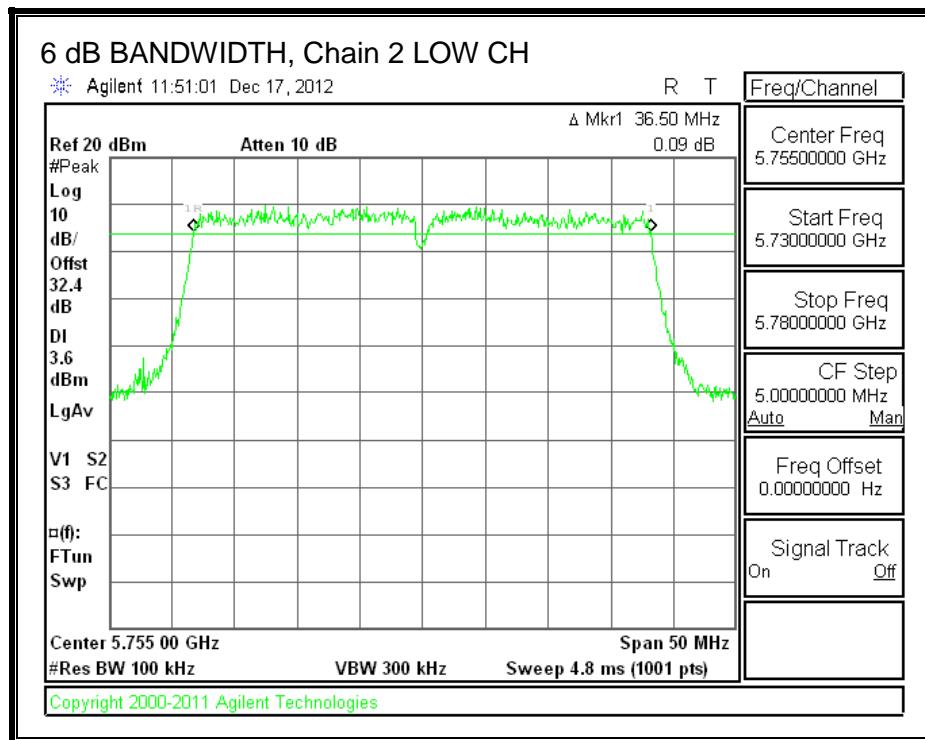

8.20.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Low | 5755 | 36.2173 | 36.1933 | 36.2157 |
| High | 5795 | 36.2258 | 36.1984 | 36.1431 |



99% BANDWIDTH, Chain 0

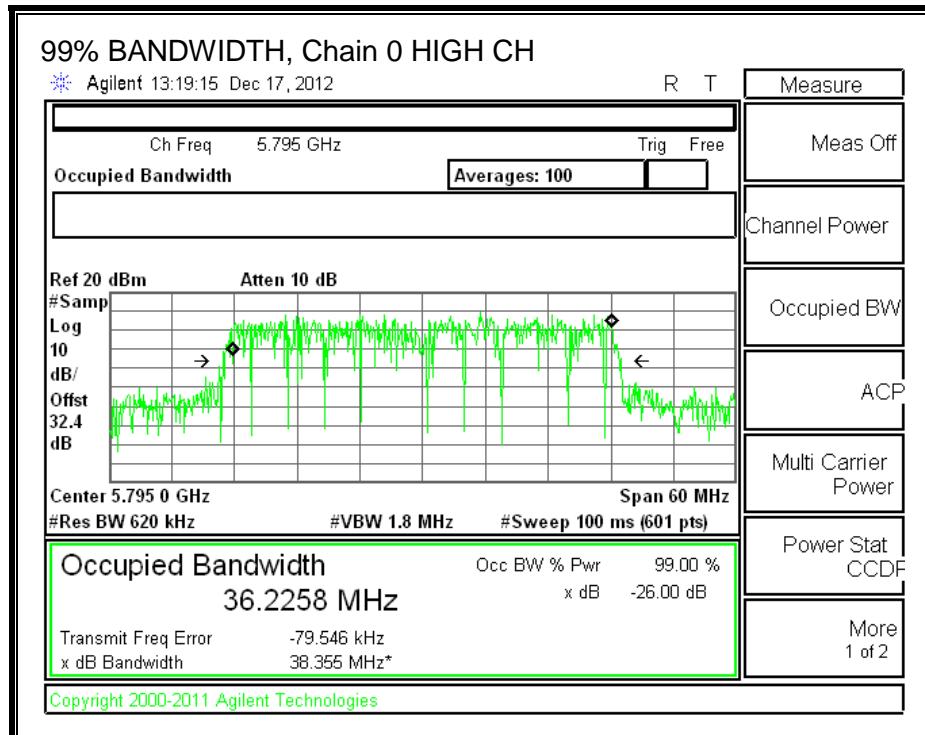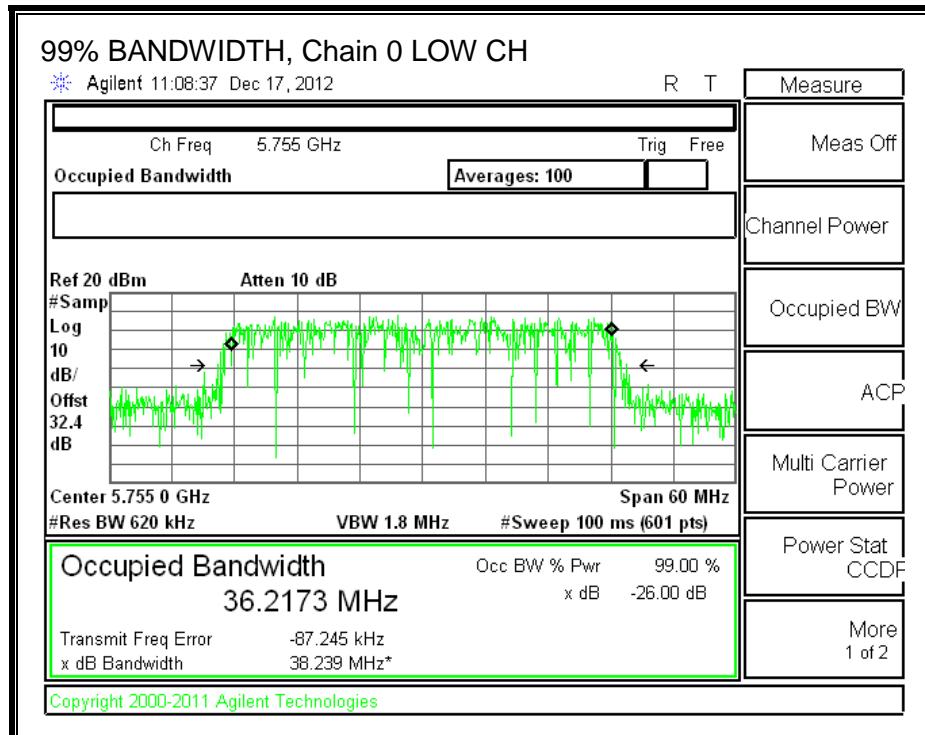

99% BANDWIDTH, Chain 1

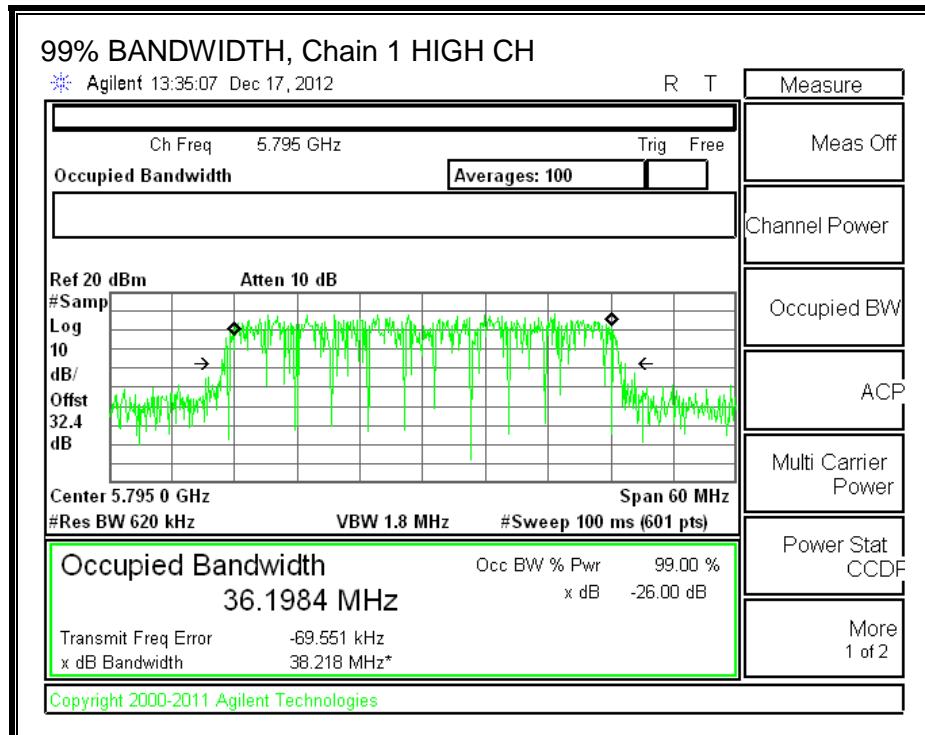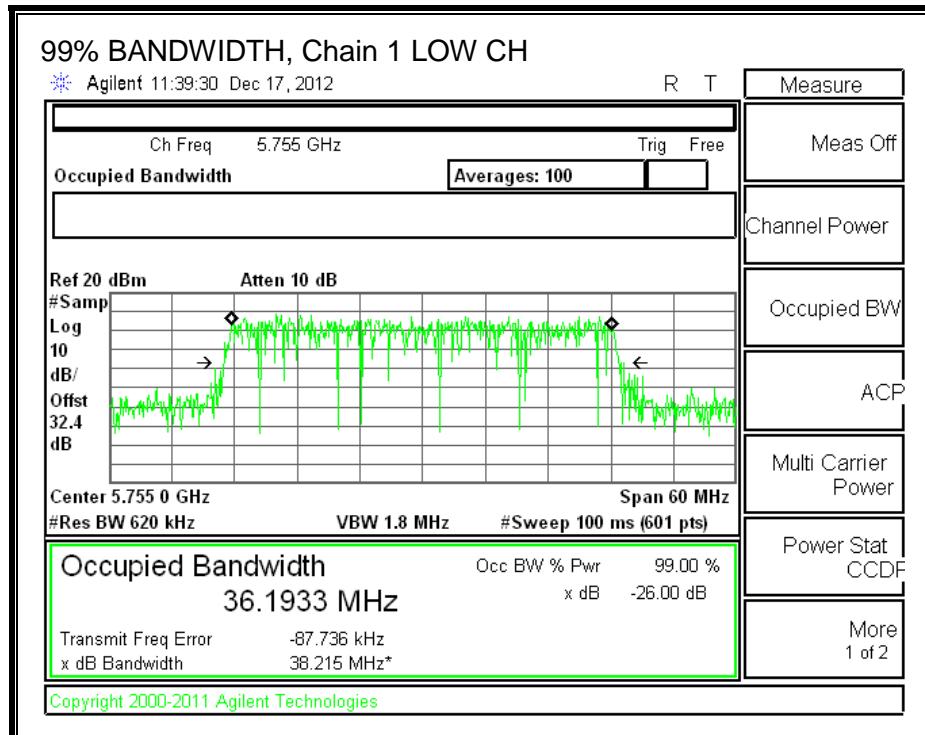

99% BANDWIDTH, Chain 2

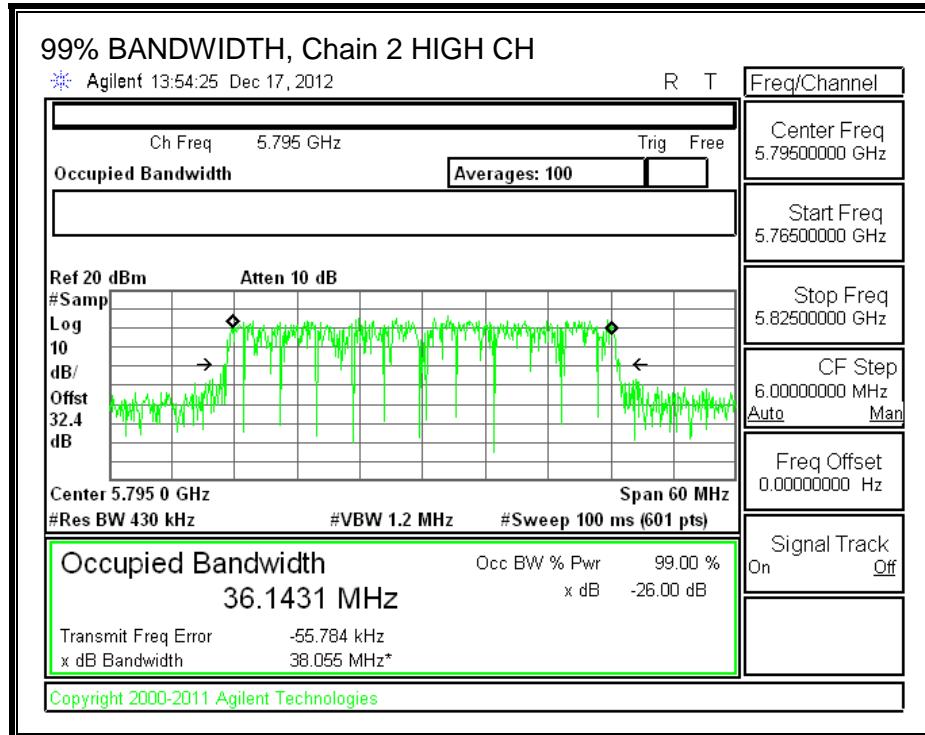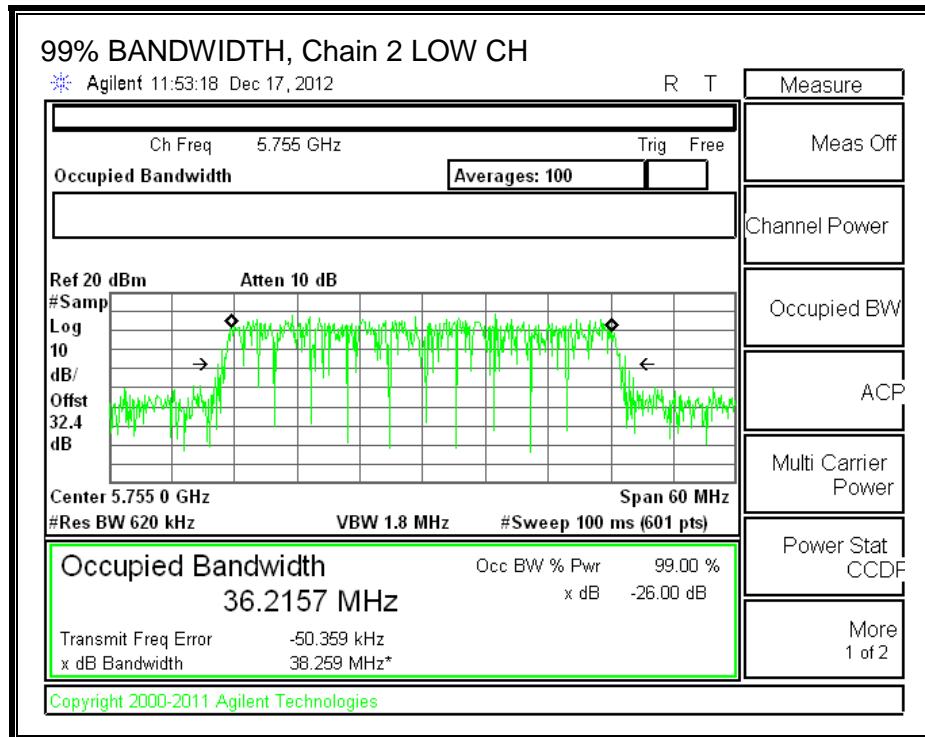

8.20.3. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Uncorrelated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 2.70 | 1.90 | 4.40 | 3.13 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 5755 | 3.13 | 30.00 | 30 | 36 | 30.00 |
| High | 5795 | 3.13 | 30.00 | 30 | 36 | 30.00 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low | 5755 | 20.40 | 20.80 | 20.50 | 25.34 | 30.00 | -4.66 |
| High | 5795 | 24.30 | 24.50 | 24.40 | 29.17 | 30.00 | -0.83 |

8.20.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-210 A8.2



The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS



PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas (dBm) | Chain 1 Meas (dBm) | Chain 2 Meas (dBm) | Total PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|--------------------------|--------------------------|--------------------------|-----------------------|----------------|----------------|
| Low | 5755 | -8.83 | -8.80 | -8.54 | -3.95 | 8.0 | -12.0 |
| High | 5795 | -9.66 | -8.25 | -9.88 | -4.43 | 8.0 | -12.4 |



PSD, Chain 0

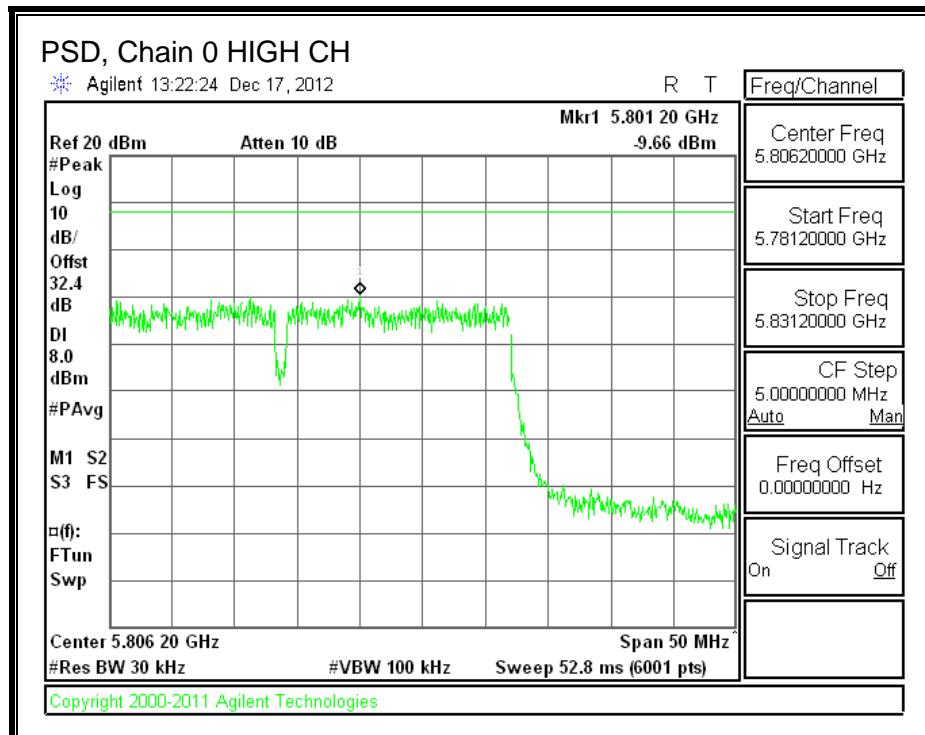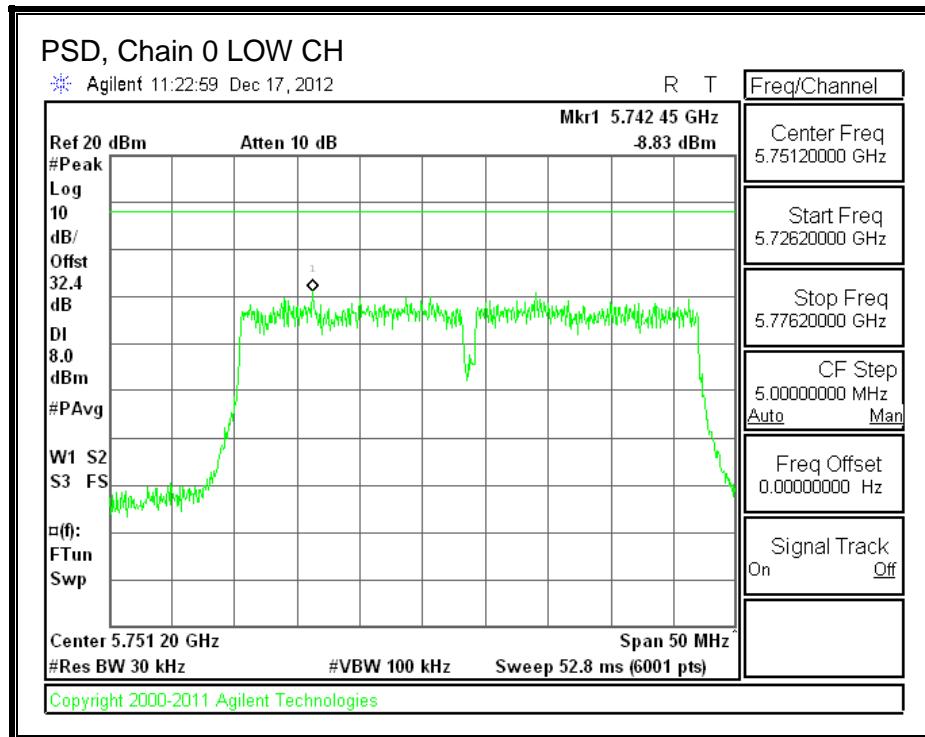

PSD, Chain 1

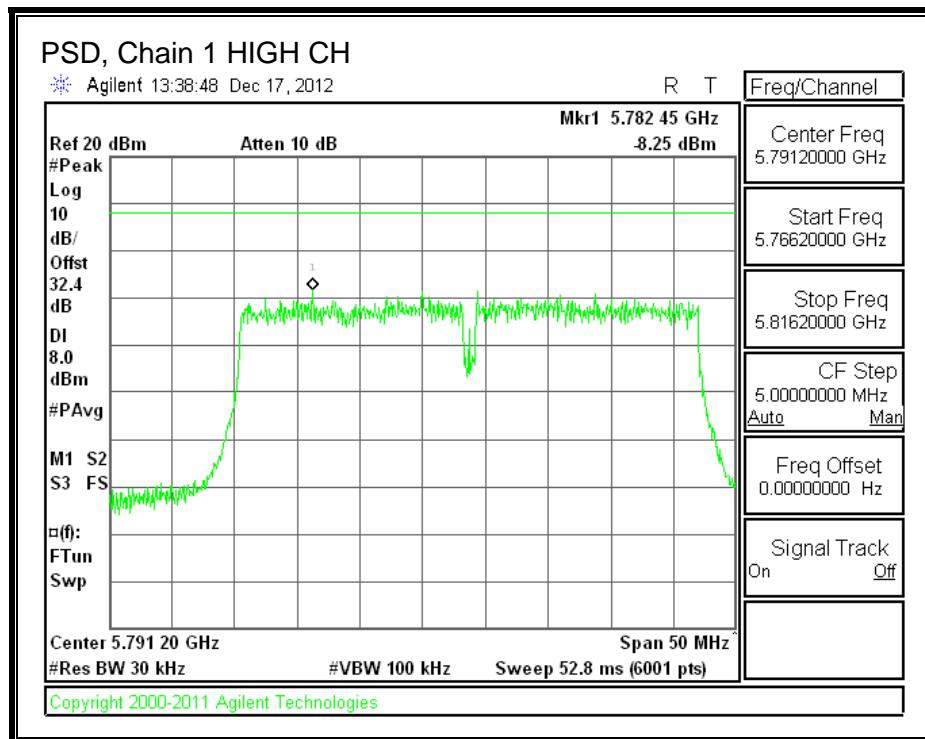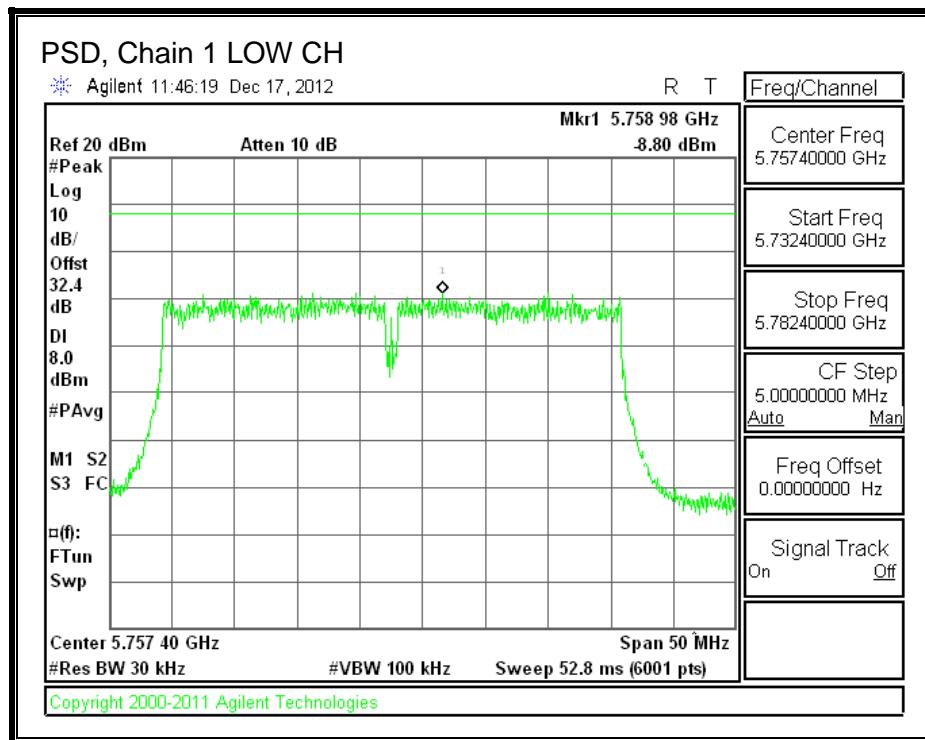

PSD, Chain 2

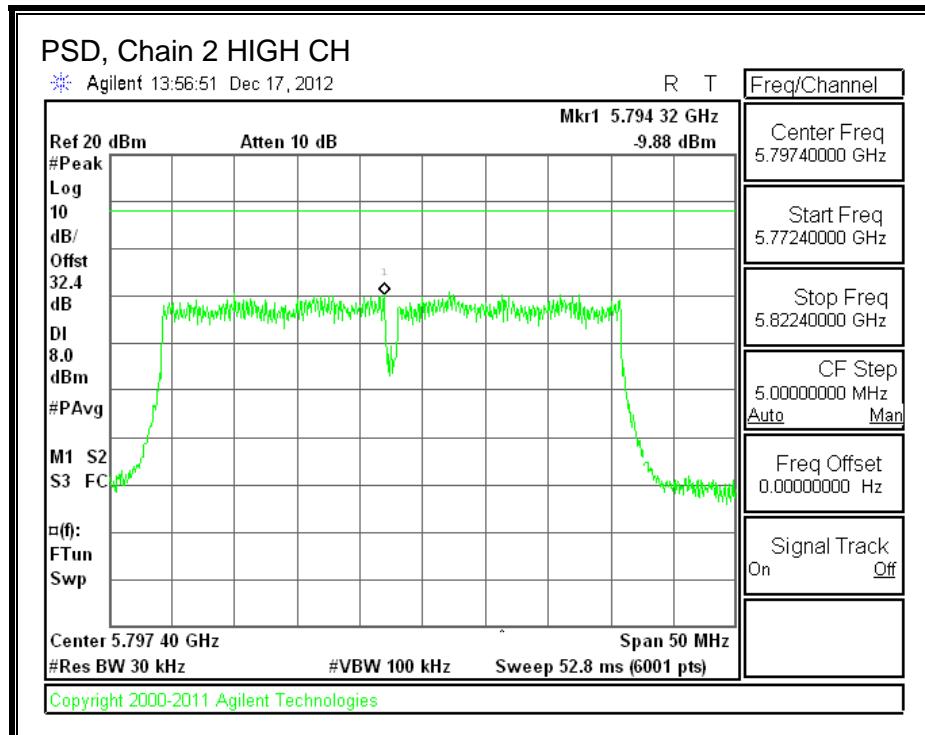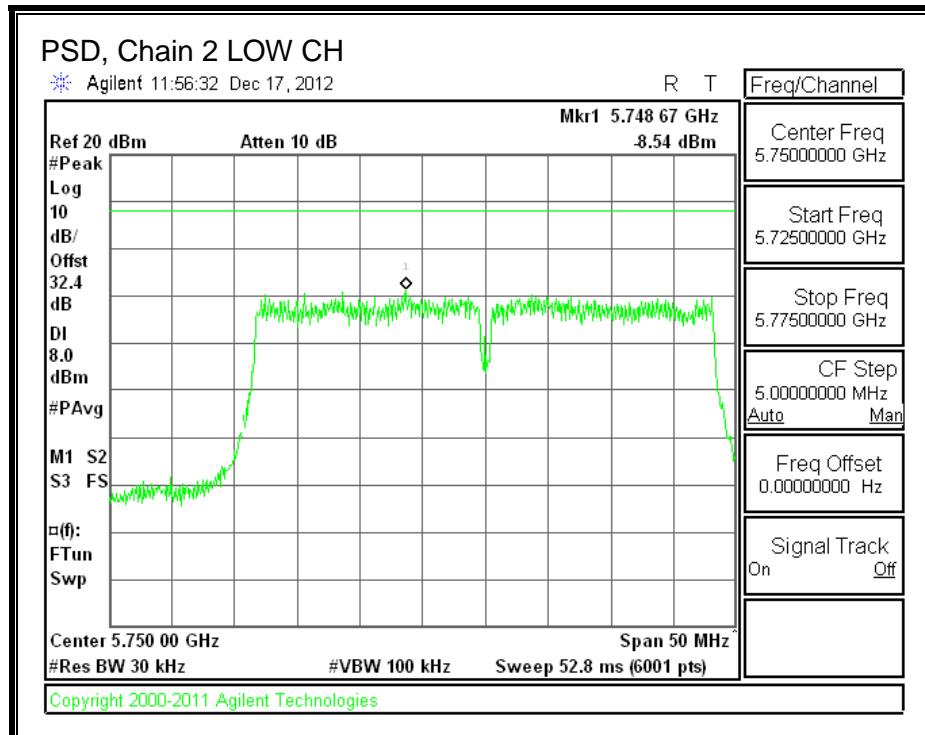

8.20.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-210 A8.5


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS



LOW CHANNEL BANDEDGE, Chain 0

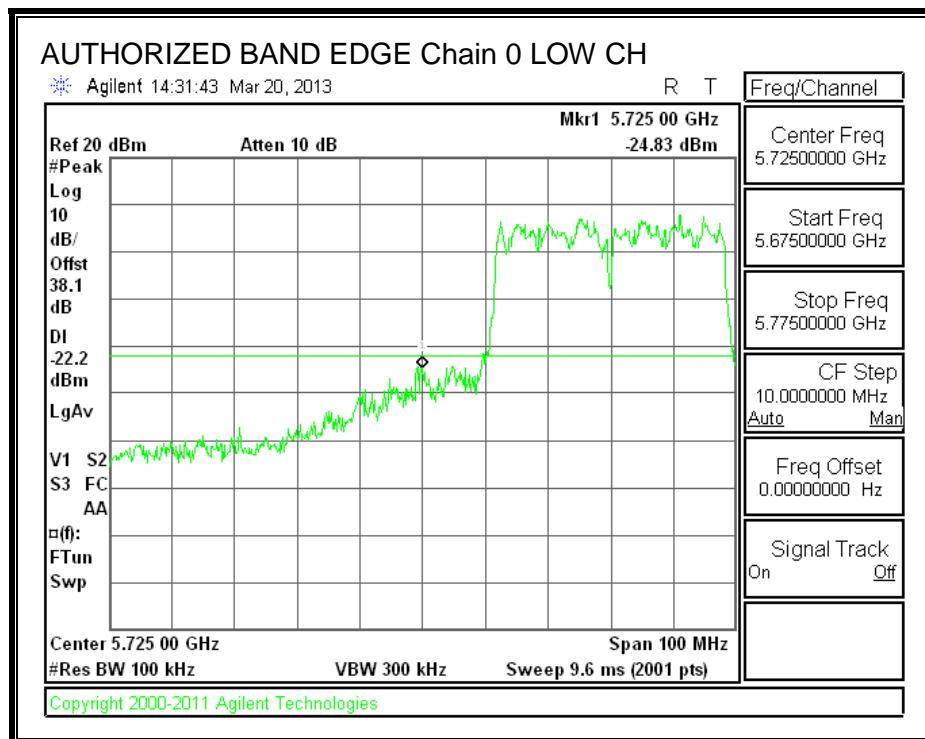


HIGH CHANNEL BANDEDGE, Chain 0

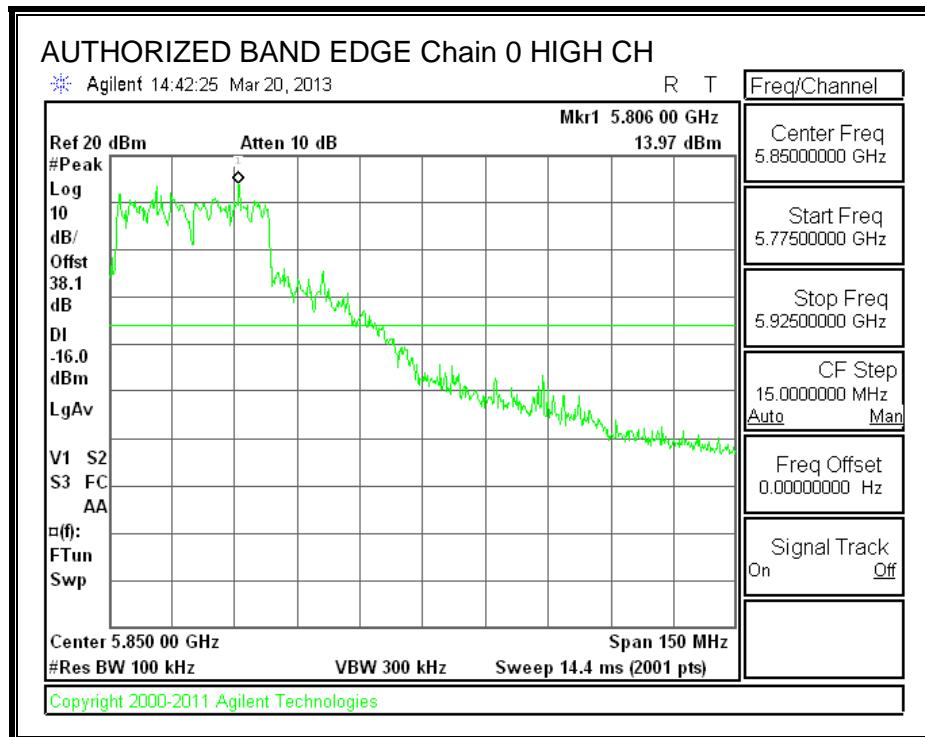


OUT-OF-BAND EMISSIONS, Chain 0

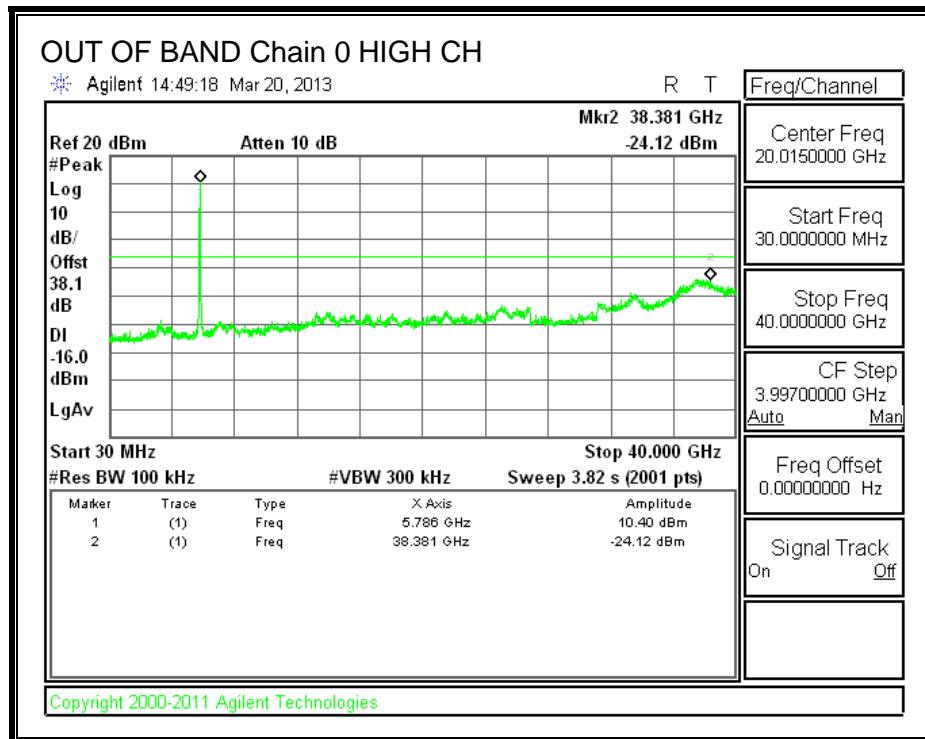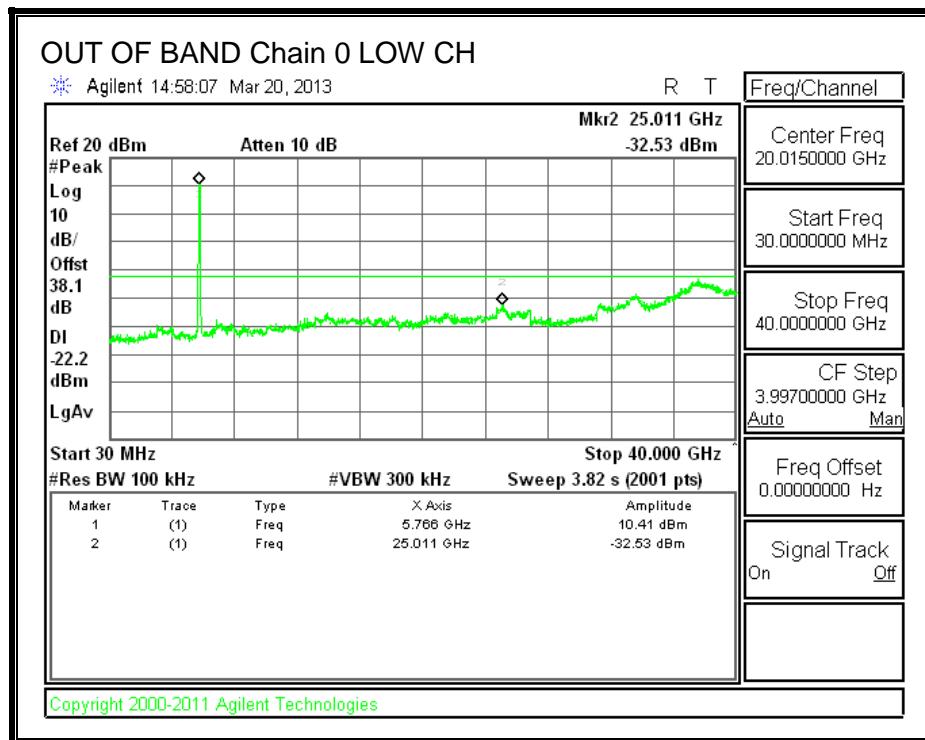



LOW CHANNEL BANDEDGE, Chain 1

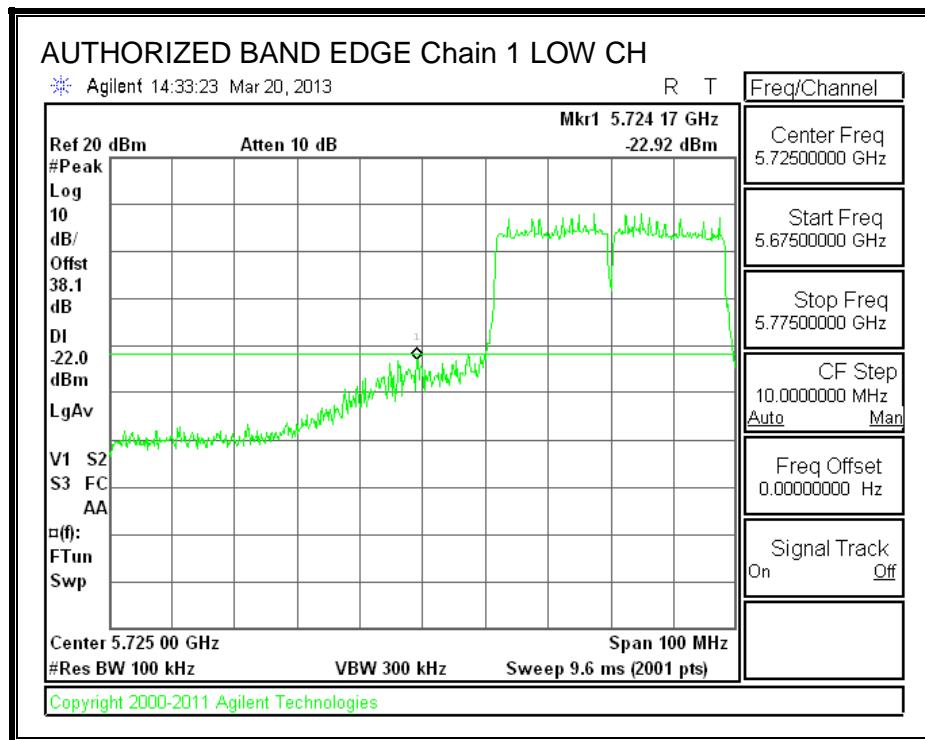


HIGH CHANNEL BANDEDGE, Chain 1

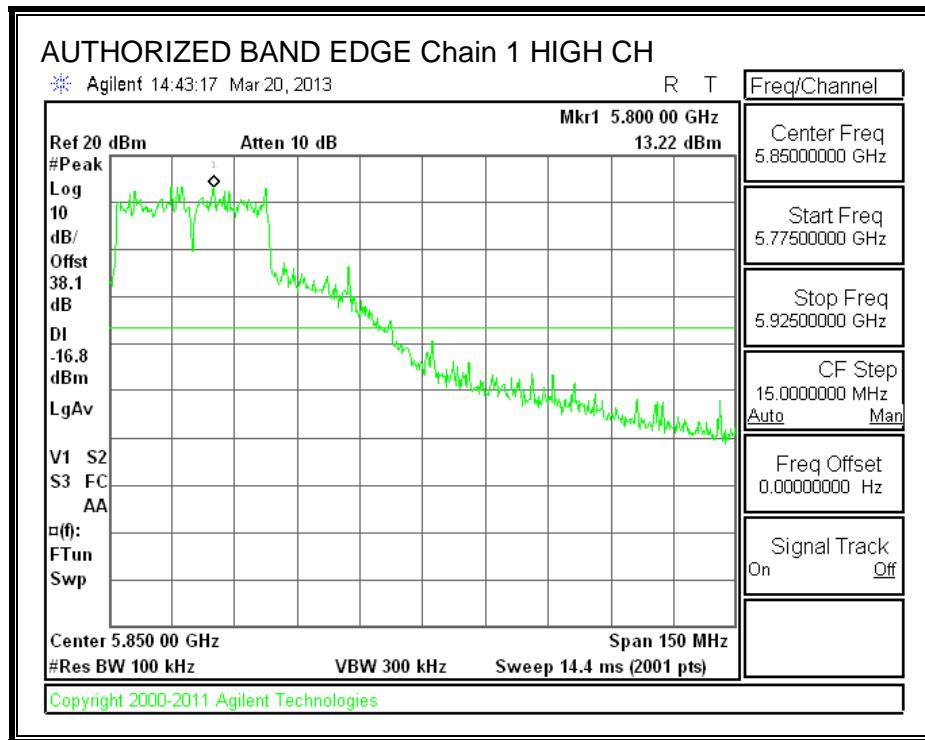


OUT-OF-BAND EMISSIONS, Chain 1

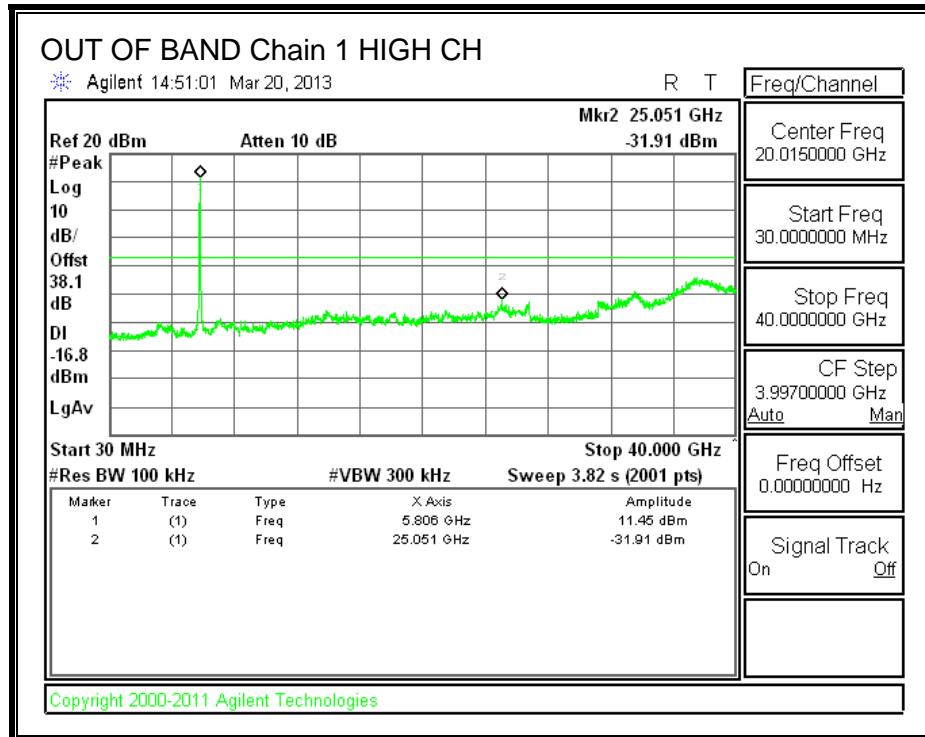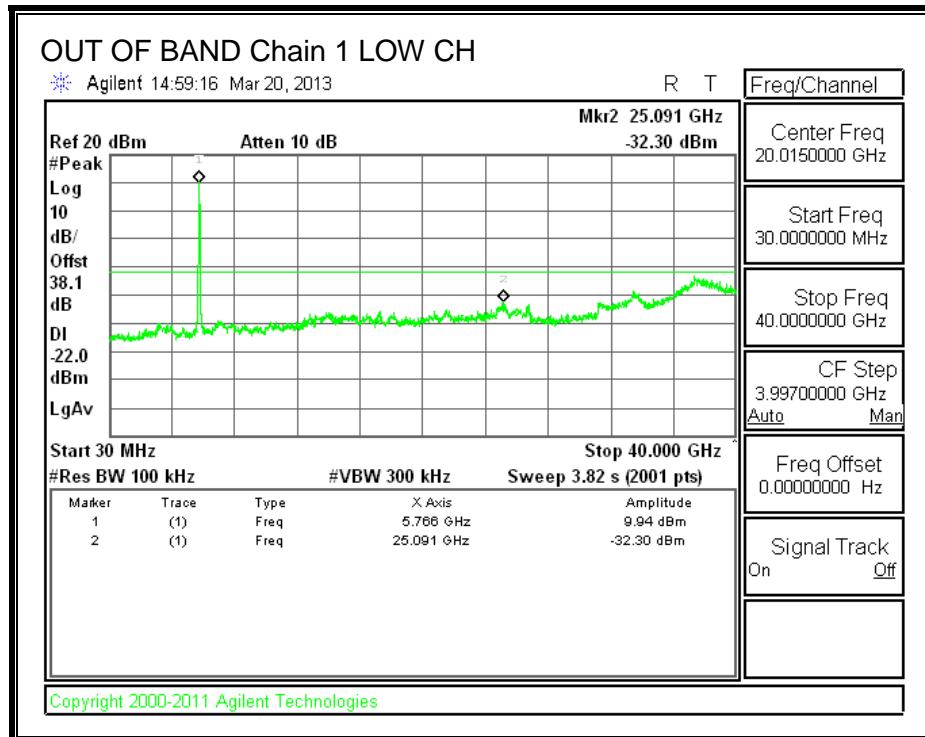



LOW CHANNEL BANDEDGE, Chain 2

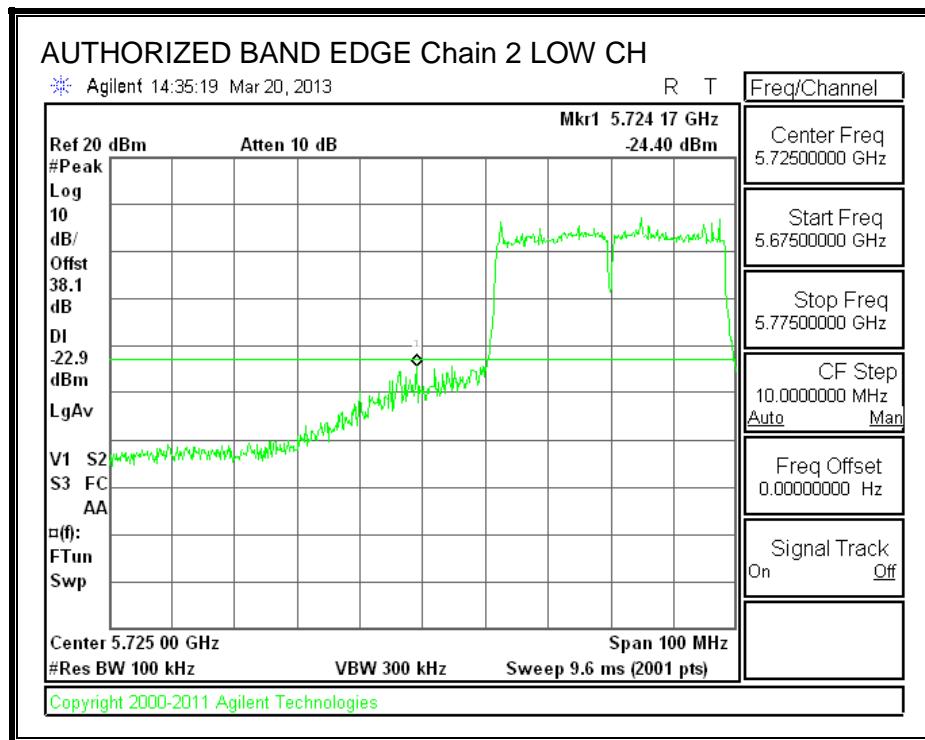

HIGH CHANNEL BANDEDGE, Chain 2

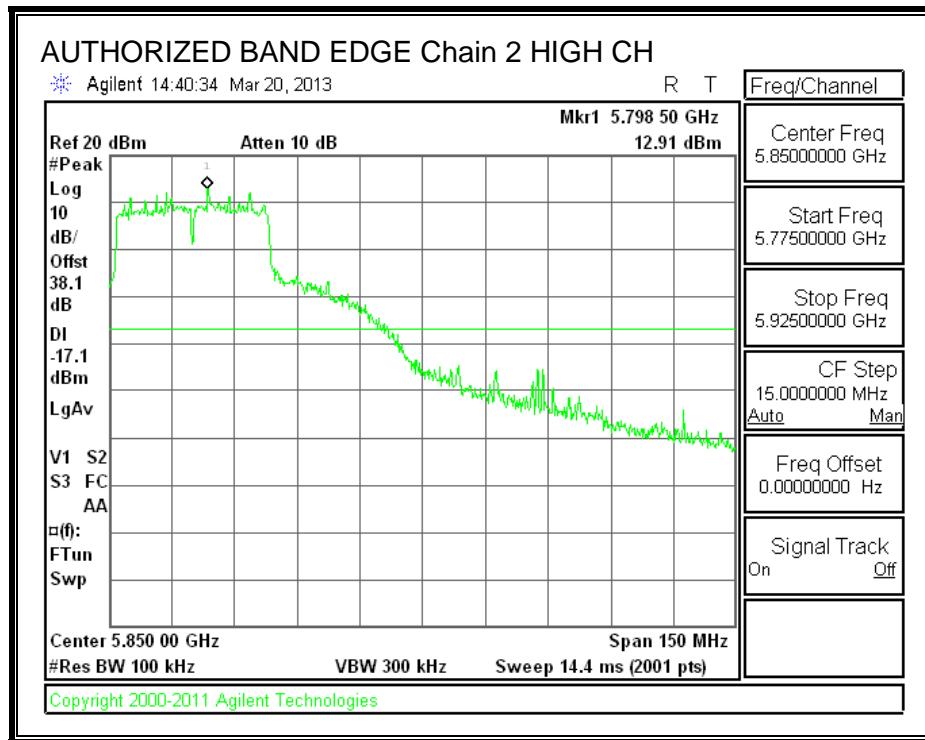

OUT-OF-BAND EMISSIONS, Chain 2

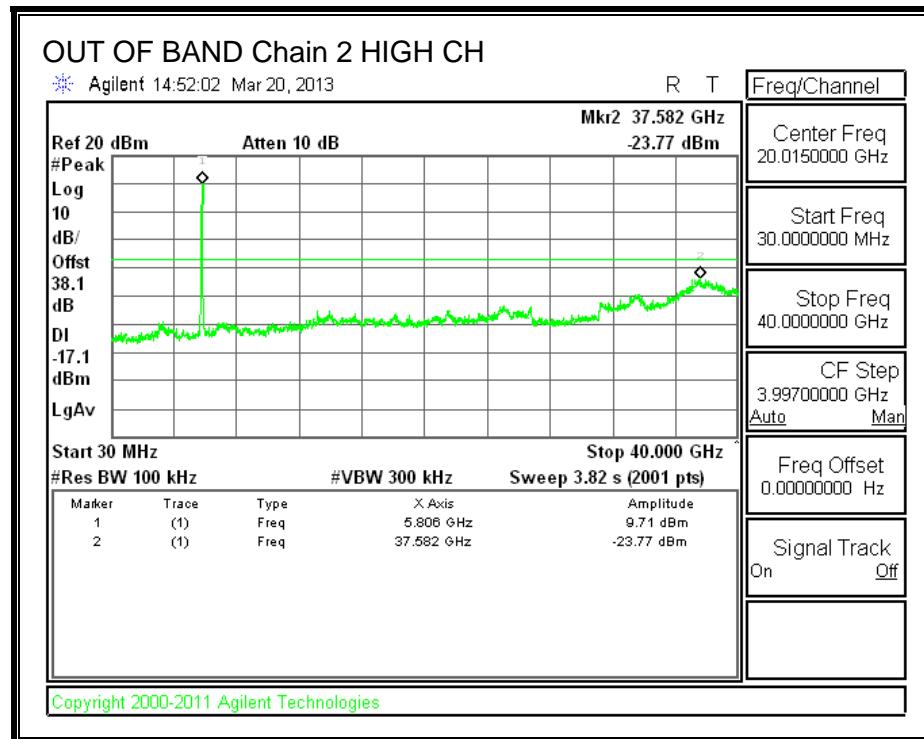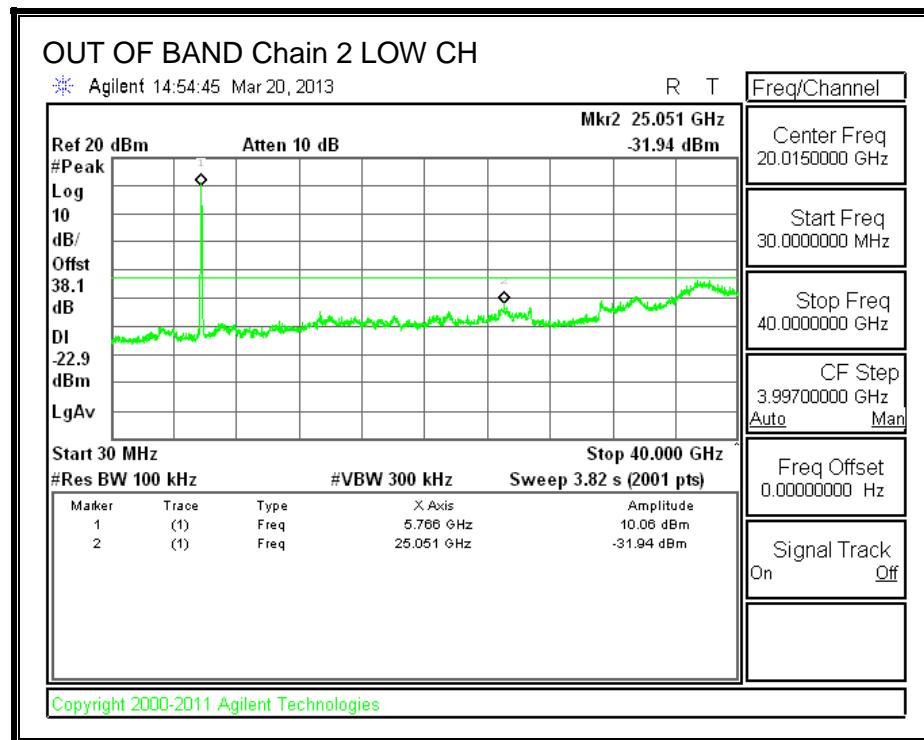

8.21. 802.11ac VHT80 1TX MODE IN THE 5.8 GHz BAND

Covered by testing 802.11n AC80 CDD 3TX, power per chain used in the 802.11n AC80 CDD 3TX mode is equal to the power per chain that will be used for 802.11n AC80 1TX mode.

8.22. 802.11ac VHT80 CDD 2TX MODE IN THE 5.8 GHz BAND

Covered by testing 802.11n AC80 CDD 3TX, power per chain used in the 802.11n AC80 CDD 3TX mode is equal to the power per chain that will be used for 802.11n AC80 CDD 2TX mode.

8.23. 802.11ac VHT80 BF 2TX MODE IN THE 5.8 GHz BAND

Covered by testing 802.11n AC80 CDD 3TX, power per chain used in the 802.11n AC80 CDD 3TX mode is equal to the power per chain that will be used for 802.11n AC80 BF 2TX mode.

8.23.1. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

Use this table for uncorrelated chains and unequal antenna gain

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 2.70 | 1.90 | 4.40 | 7.83 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Mid | 5755 | 7.83 | 28.17 | 30 | 36 | 28.17 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Mid | 5755 | 21.00 | 21.30 | 21.10 | 25.91 | 28.17 | -2.26 |

8.24. 802.11ac VHT80 BF 3TX MODE IN THE 5.8 GHz BAND

Covered by testing 802.11n AC80 CDD 3TX, power per chain used in the 802.11n AC80 CDD 3TX mode is equal to the power per chain that will be used for 802.11n AC80 BF 3TX mode.

8.24.1. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

Use this table for uncorrelated chains and unequal antenna gain

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 2.70 | 1.90 | 4.40 | 7.83 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Mid | 5755 | 7.83 | 28.17 | 30 | 36 | 28.17 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Mid | 5755 | 21.00 | 21.30 | 21.10 | 25.91 | 28.17 | -2.26 |

8.25. 802.11ac VHT80 CDD 3TX MODE IN THE 5.8 GHz BAND (CH155)

8.25.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)


IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

| Channel | Frequency (MHz) | 6 dB BW Chain 0 (MHz) | 6 dB BW Chain 1 (MHz) | 6 dB BW Chain 2 (MHz) | Minimum Limit (MHz) |
|---------|--------------------|-----------------------------|-----------------------------|-----------------------------|---------------------------|
| Mid | 5775 | 76.20 | 76.15 | 76.05 | 0.5 |


6 dB BANDWIDTH, Chain 0

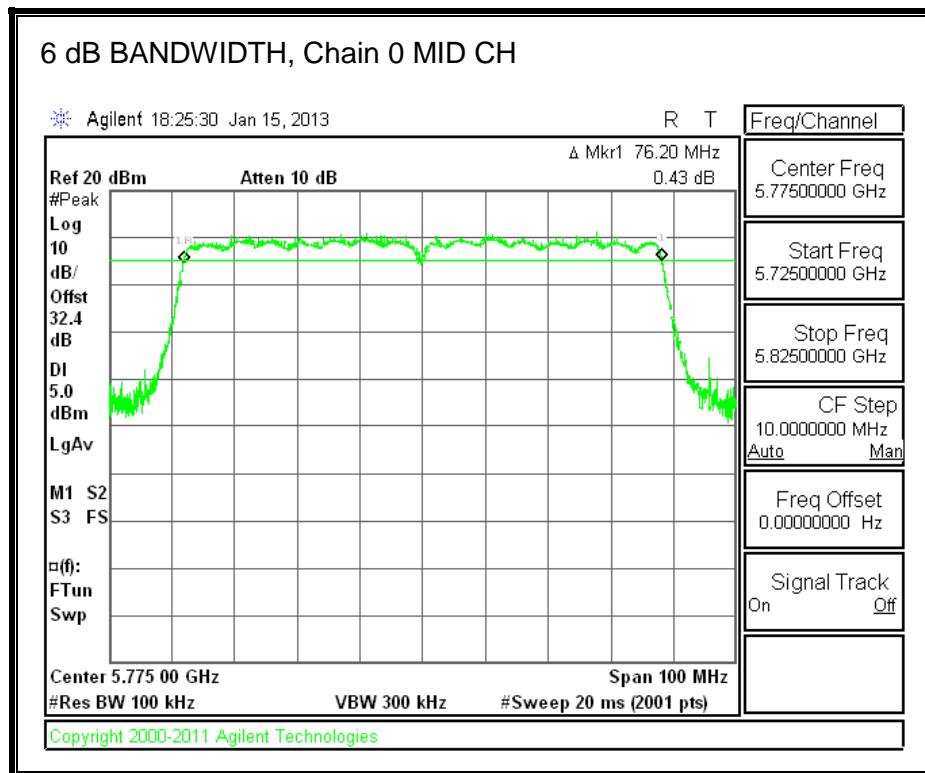

6 dB BANDWIDTH, Chain 1

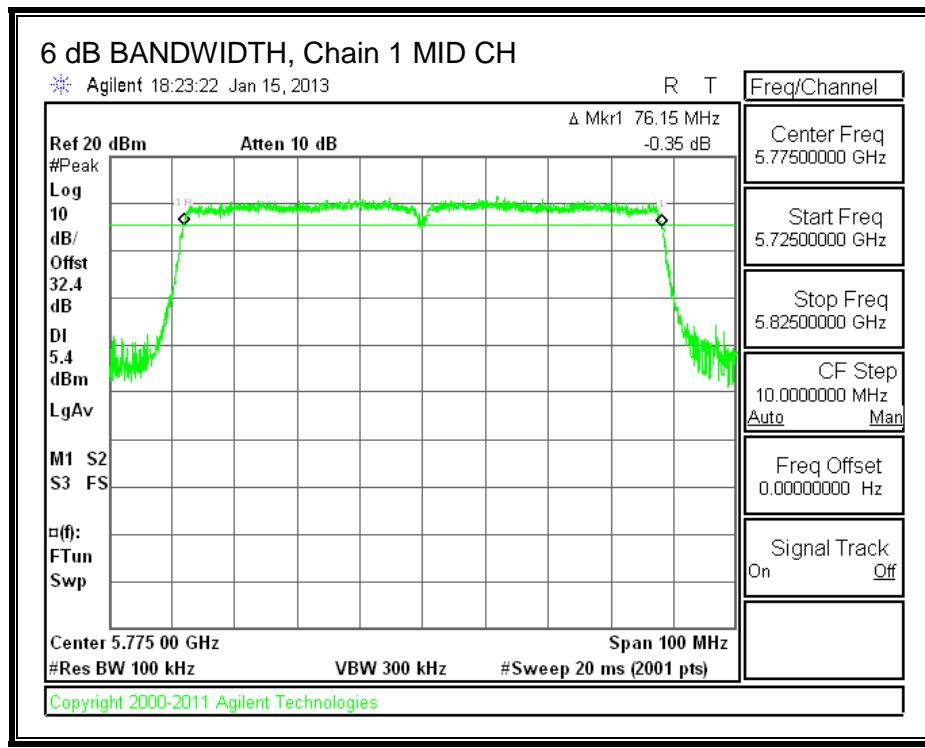

6 dB BANDWIDTH, Chain 2

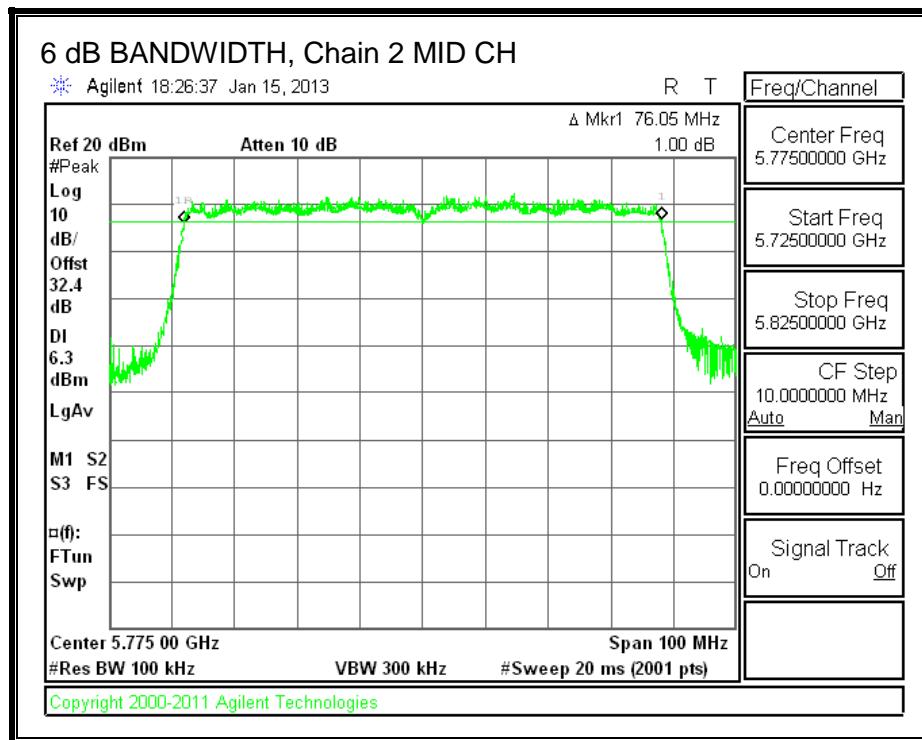

8.25.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.


RESULTS


| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| MID | 5775 | 75.5945 | 75.5191 | 75.6038 |

99% BANDWIDTH, Chain 0

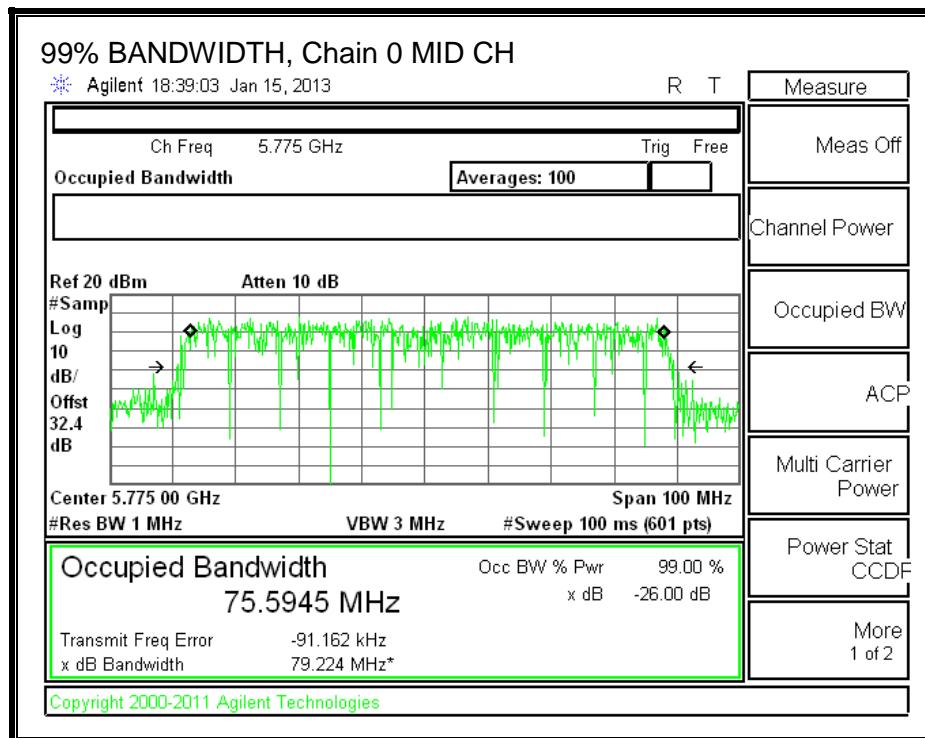

99% BANDWIDTH, Chain 1

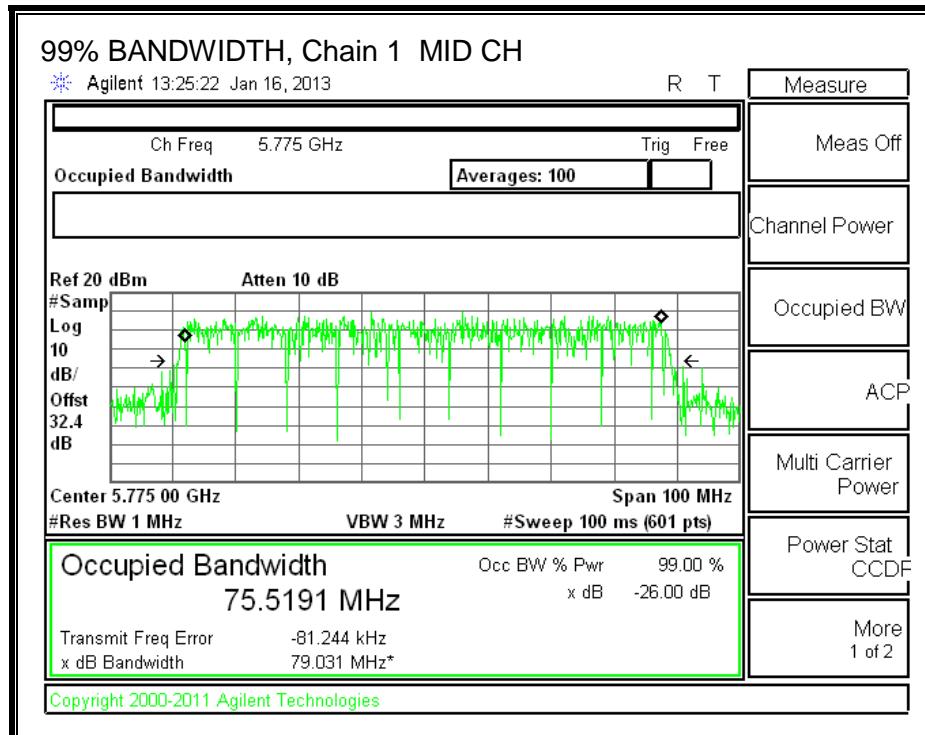

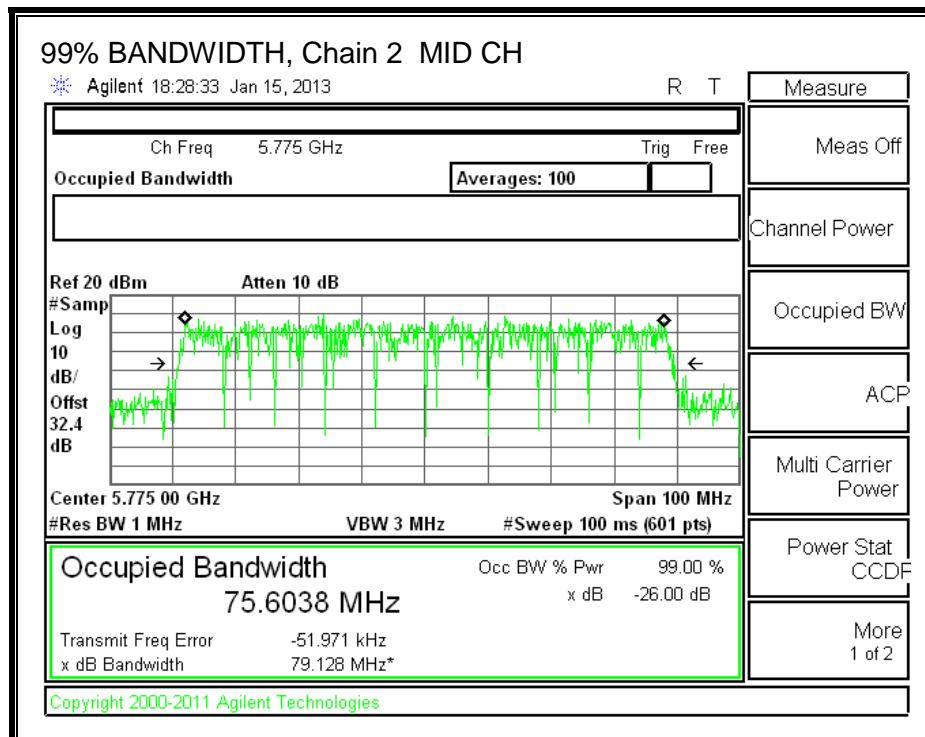99% BANDWIDTH, Chain 2

8.25.3. OUTPUT AVERAGE POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

Use this table for uncorrelated chains and unequal antenna gain

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Uncorrelated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 2.70 | 1.90 | 4.40 | 3.13 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Mid | 5755 | 3.13 | 30.00 | 30 | 36 | 30.00 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Mid | 5755 | 21.00 | 21.30 | 21.10 | 25.91 | 30.00 | -4.09 |

8.25.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-210 A8.2


The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS


PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas (dBm) | Chain 1 Meas (dBm) | Chain 2 Meas (dBm) | DCCF (dB) | Total PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|--------------------------|--------------------------|--------------------------|--------------|-----------------------|----------------|----------------|
| Mid | 5755 | -2.051 | 2.270 | -2.000 | 0.09 | 4.78 | 8.0 | -3.2 |


PSD, Chain 0

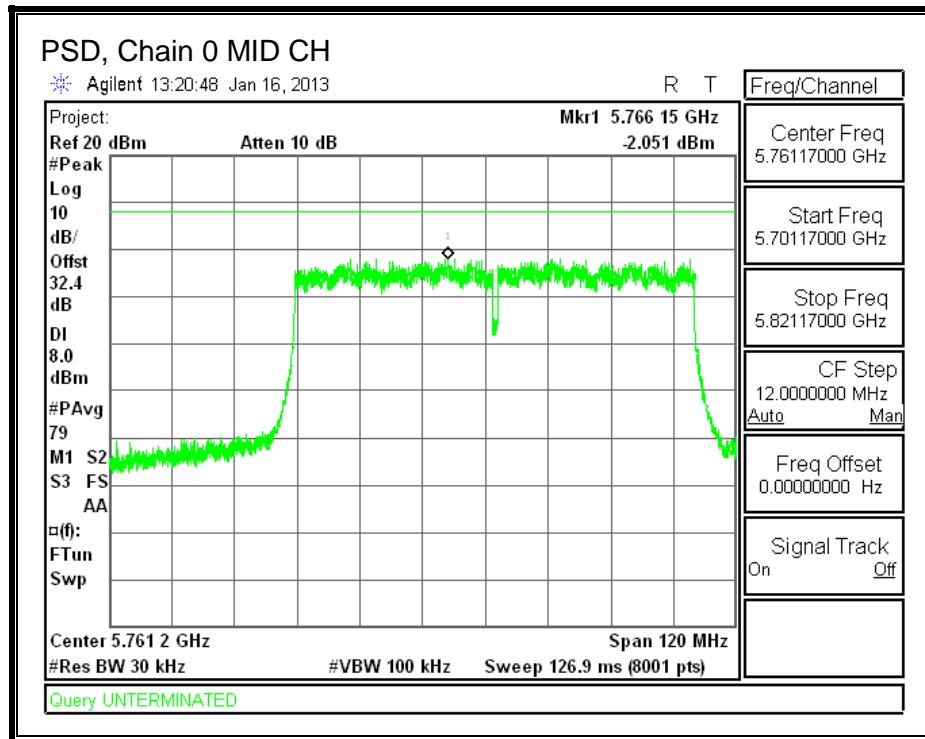

PSD, Chain 1

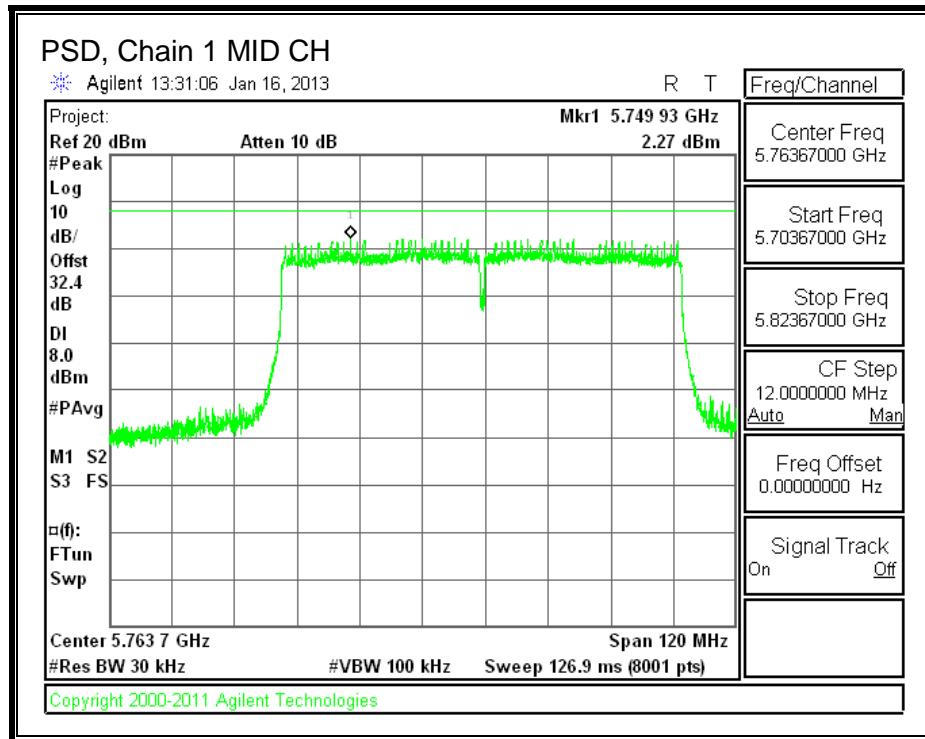

PSD, Chain 2

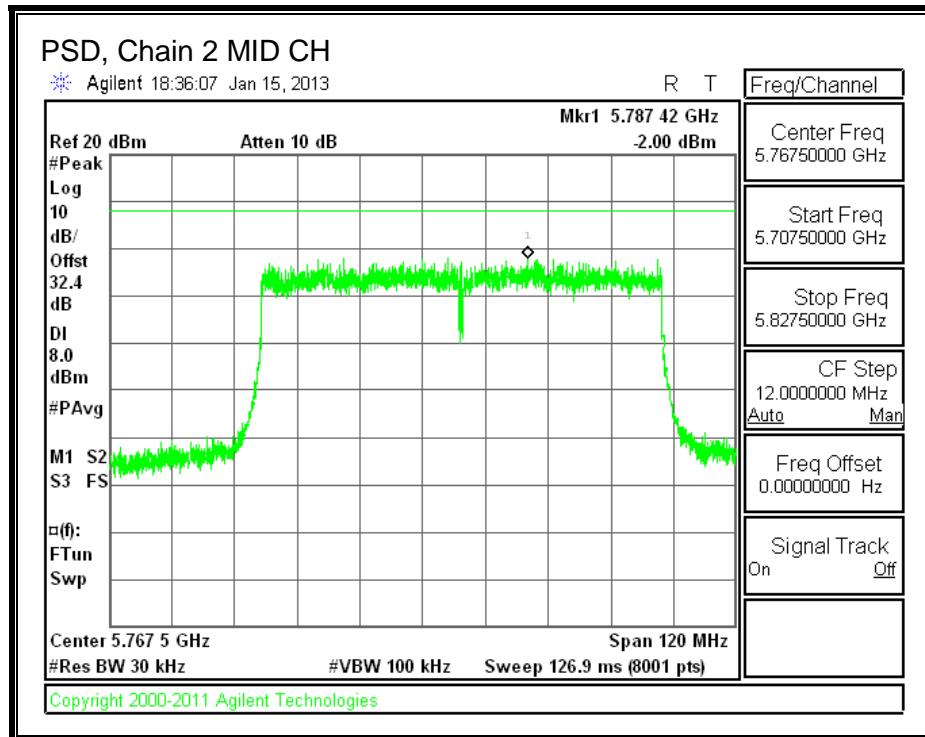

8.25.5. OUT-OF-BAND EMISSIONS



LIMITS

FCC §15.247 (d)


IC RSS-210 A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.



BANDEDGE, Chain 0

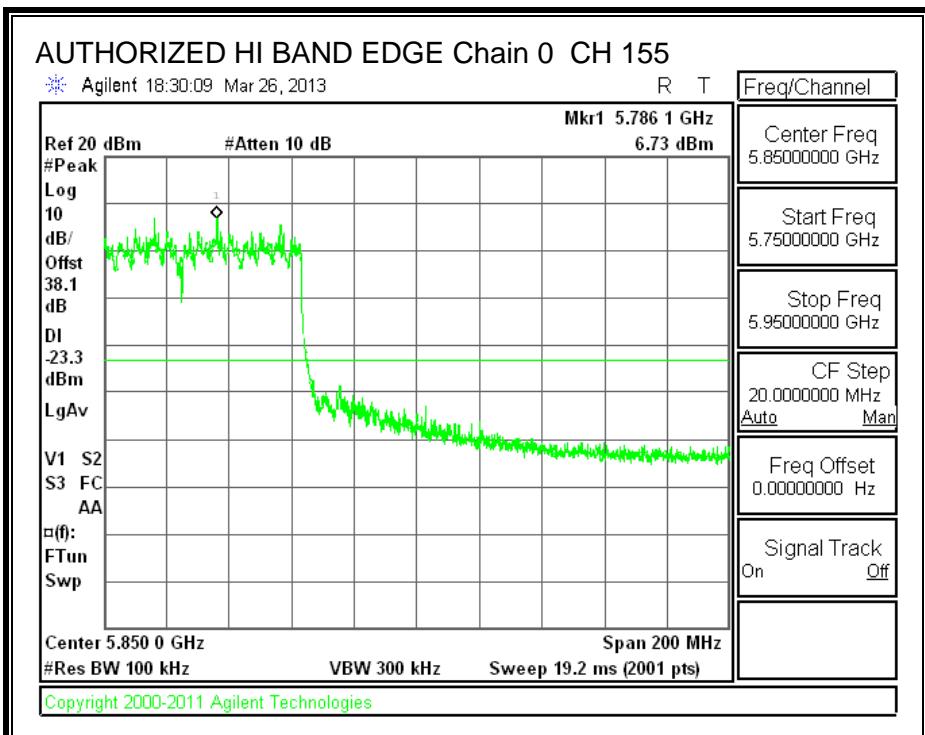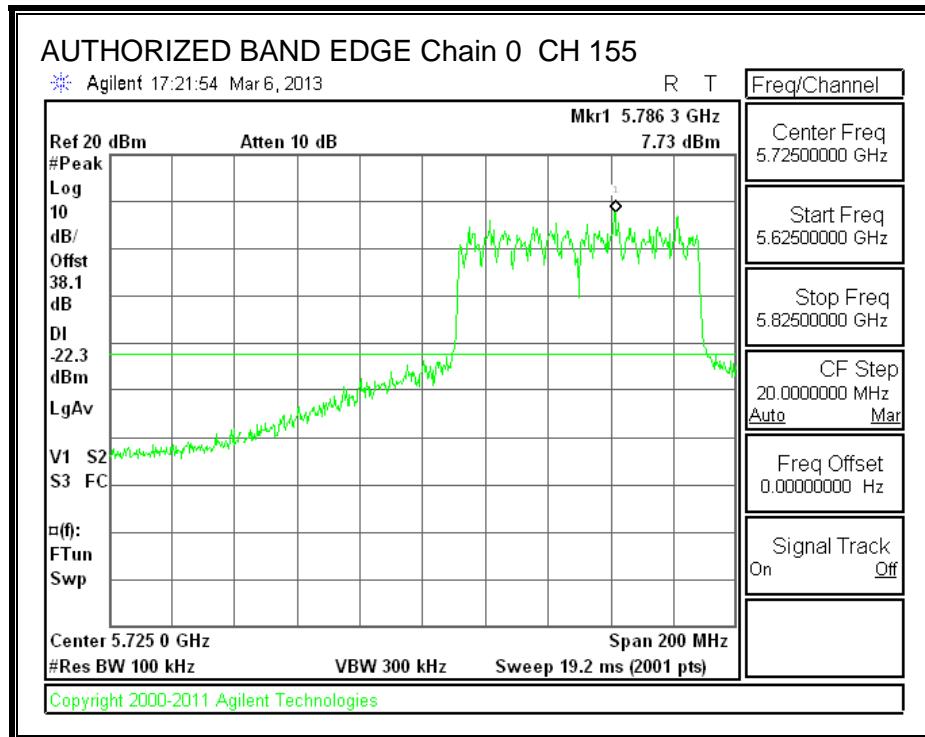


OUT-OF-BAND EMISSIONS, Chain 0

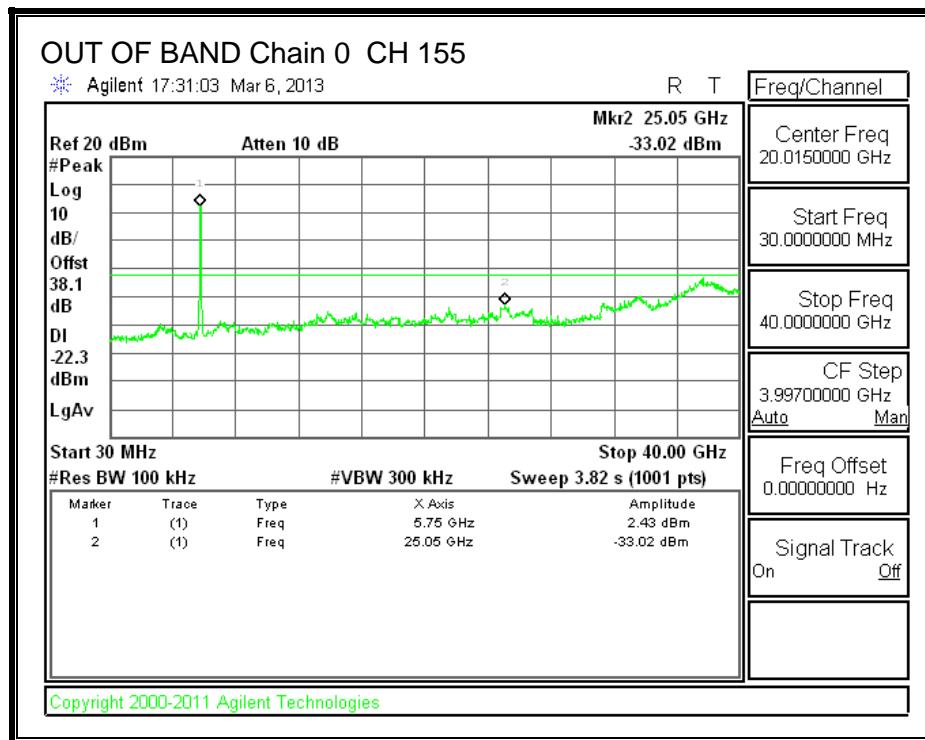



LOW CHANNEL BANDEDGE, Chain 1

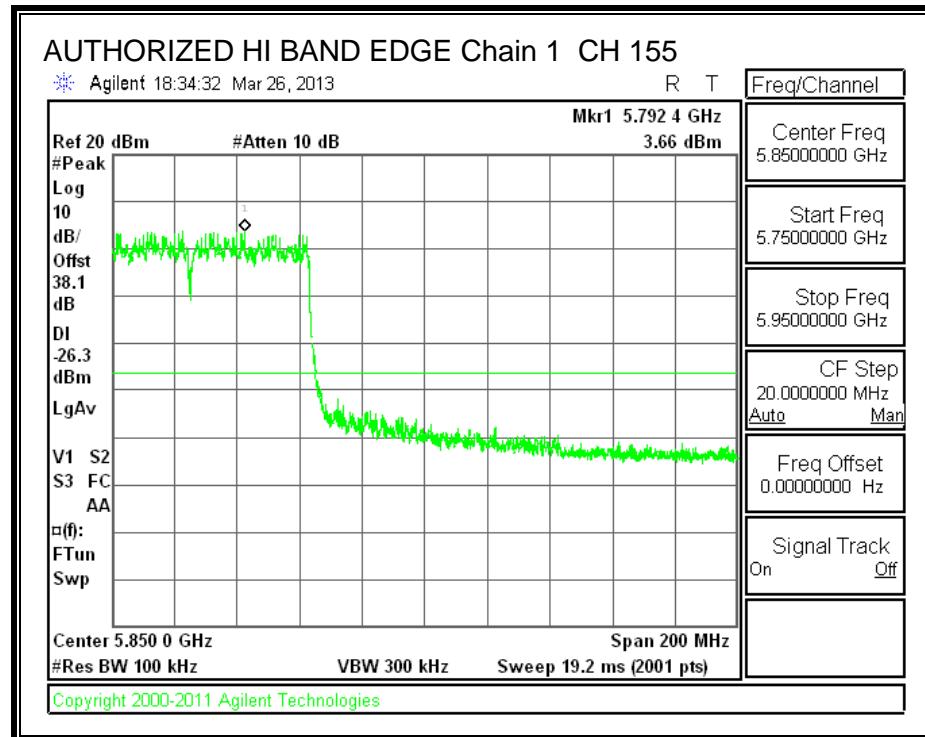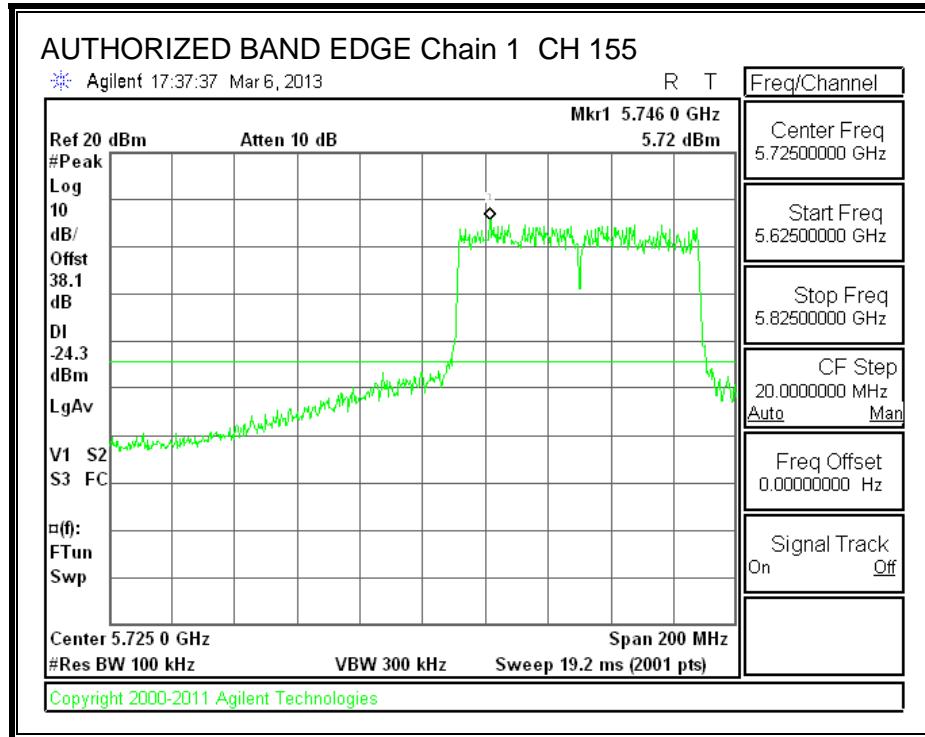


OUT-OF-BAND EMISSIONS, Chain 1

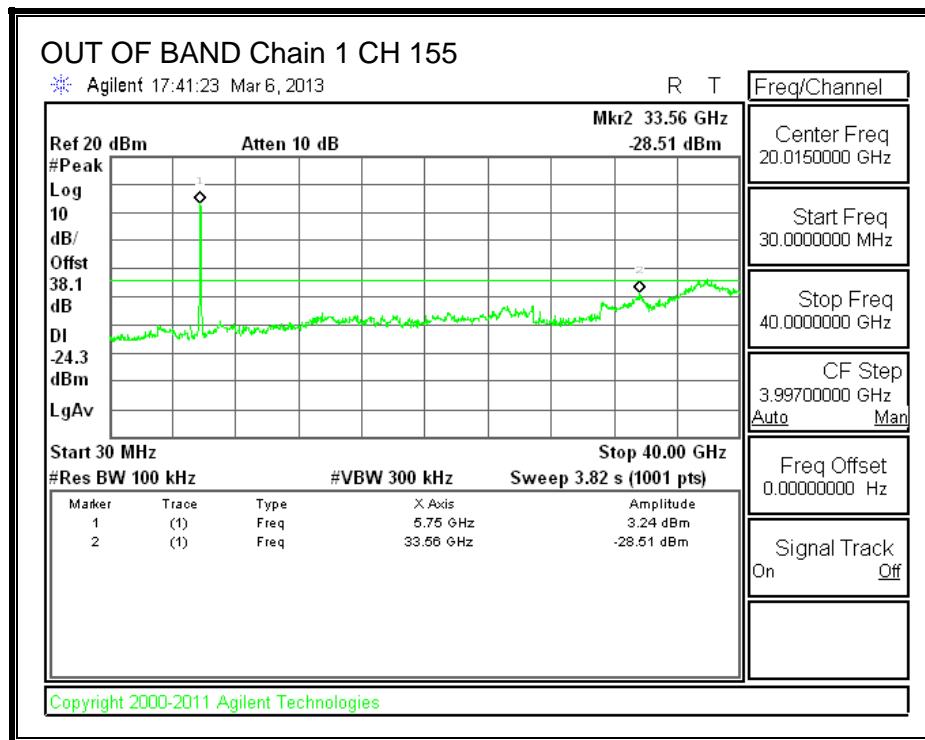

LOW CHANNEL BANDEDGE, Chain 2

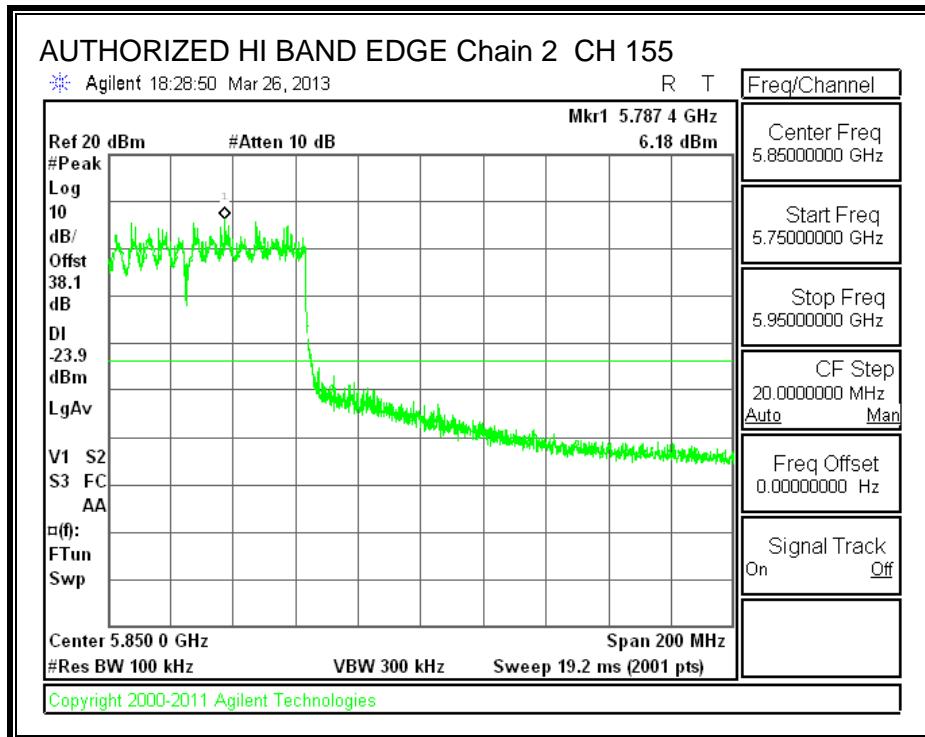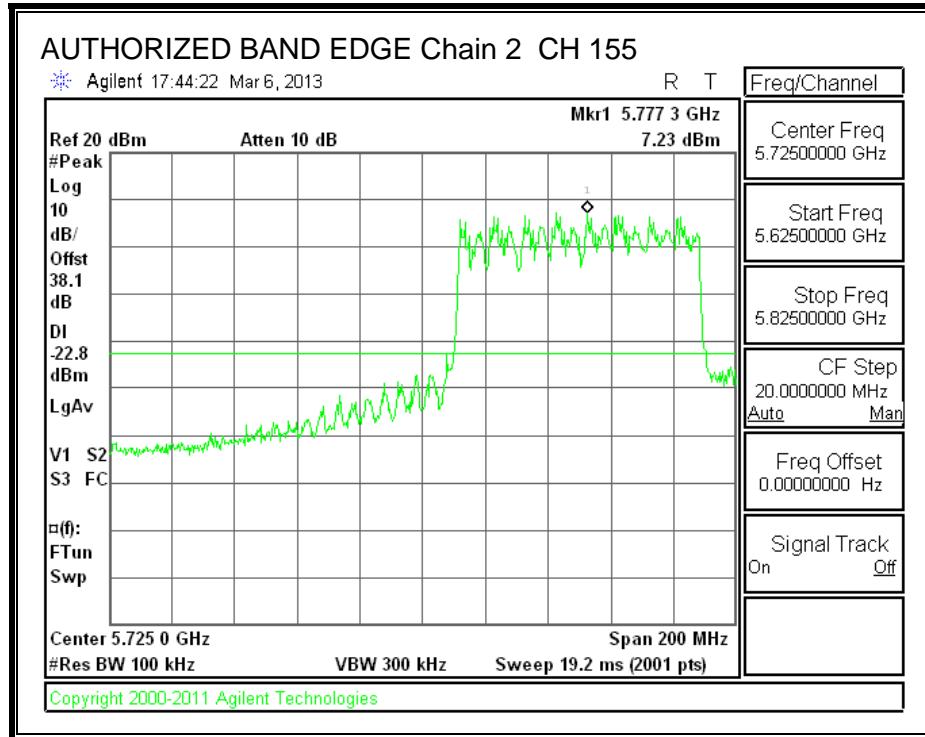

OUT-OF-BAND EMISSIONS, Chain 2

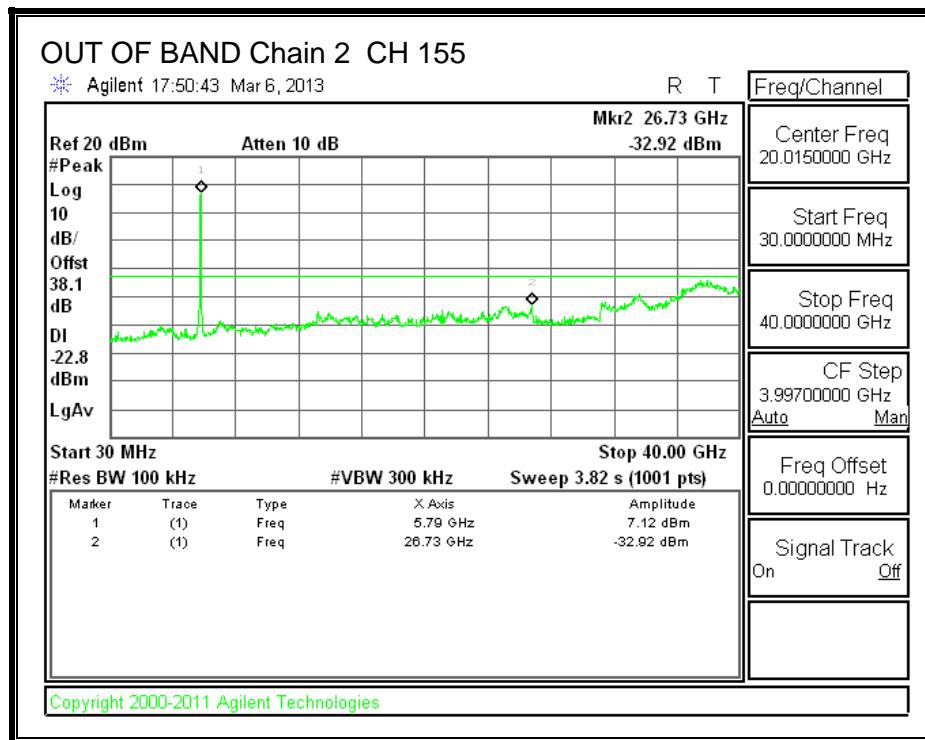

8.26. 802.11n HT20 BF 2TX MODE IN THE 5.8 GHz BAND

Covered by testing HT20 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

However, output average power is provided below for this mode.

8.26.1. OUTPUT AVERAGE POWER

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|---|
| 2.70 | 4.40 | 6.60 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 5745 | 6.60 | 29.40 | 30 | 36 | 29.40 |
| Mid | 5785 | 6.60 | 29.40 | 30 | 36 | 29.40 |
| High | 5825 | 6.60 | 29.40 | 30 | 36 | 29.40 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margi (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|---------------|
| Low | 5745 | 22.00 | 22.30 | 25.16 | 29.40 | -4.24 |
| Mid | 5785 | 24.80 | 25.20 | 28.01 | 29.40 | -1.39 |
| High | 5825 | 23.90 | 24.00 | 26.96 | 29.40 | -2.44 |

8.27. 802.11n HT20 BF 3TX MODE IN THE 5.8 GHz BAND

Covered by testing HT20 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

However, output average power is provided below for this mode.

8.27.1. OUTPUT AVERAGE POWER

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 2.70 | 1.90 | 4.40 | 7.83 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 5745 | 7.83 | 28.17 | 30 | 36 | 28.17 |
| Mid | 5785 | 7.83 | 28.17 | 30 | 36 | 28.17 |
| High | 5825 | 7.83 | 28.17 | 30 | 36 | 28.17 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low | 5745 | 22.10 | 22.60 | 22.25 | 27.09 | 28.17 | -1.08 |
| Mid | 5785 | 22.15 | 22.70 | 22.30 | 27.16 | 28.17 | -1.01 |
| High | 5825 | 22.10 | 22.65 | 22.25 | 27.11 | 28.17 | -1.06 |

8.28. 802.11n HT40 BF 2TX MODE IN THE 5.8 GHz BAND

Covered by testing HT40 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

However, output average power is provided below for this mode.

8.28.1. OUTPUT AVERAGE POWER

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|---|
| 2.70 | 4.40 | 6.60 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 5745 | 6.60 | 29.40 | 30 | 36 | 29.40 |
| High | 5825 | 6.60 | 29.40 | 30 | 36 | 29.40 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margi (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|---------------|
| Low | 5755 | 20.50 | 20.75 | 23.64 | 29.40 | -5.76 |
| High | 5795 | 24.30 | 24.60 | 27.46 | 29.40 | -1.94 |

8.29. 802.11n HT40 BF 3TX MODE IN THE 5.8 GHz BAND

Covered by testing HT40 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

However, output average power is provided below for this mode.

8.29.1. OUTPUT AVERAGE POWER

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain 2 Antenna Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| 2.70 | 1.90 | 4.40 | 7.83 |

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 5745 | 7.83 | 28.17 | 30 | 36 | 28.17 |
| High | 5825 | 7.83 | 28.17 | 30 | 36 | 28.17 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low | 5755 | 20.50 | 20.70 | 20.65 | 25.39 | 28.17 | -2.78 |
| High | 5795 | 22.10 | 22.50 | 22.30 | 27.07 | 28.17 | -1.10 |

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 30 - 88 | 100 | 40 |
| 88 - 216 | 150 | 43.5 |
| 216 - 960 | 200 | 46 |
| Above 960 | 500 | 54 |

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TX ABOVE 1 GHz 802.11b 1TX MODE IN THE 2.4 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL) CH1


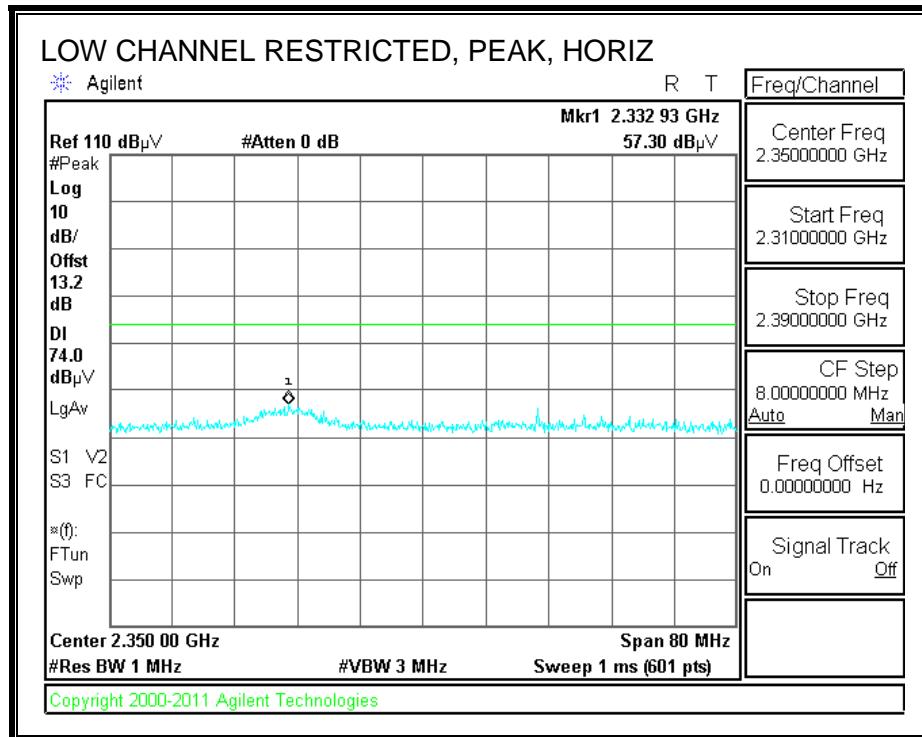


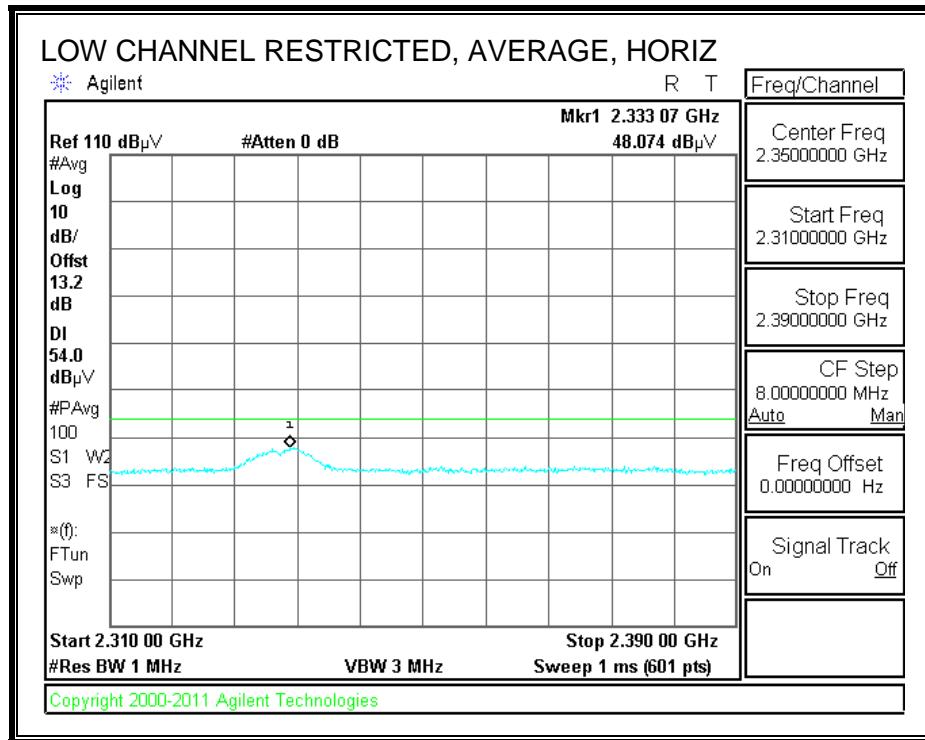

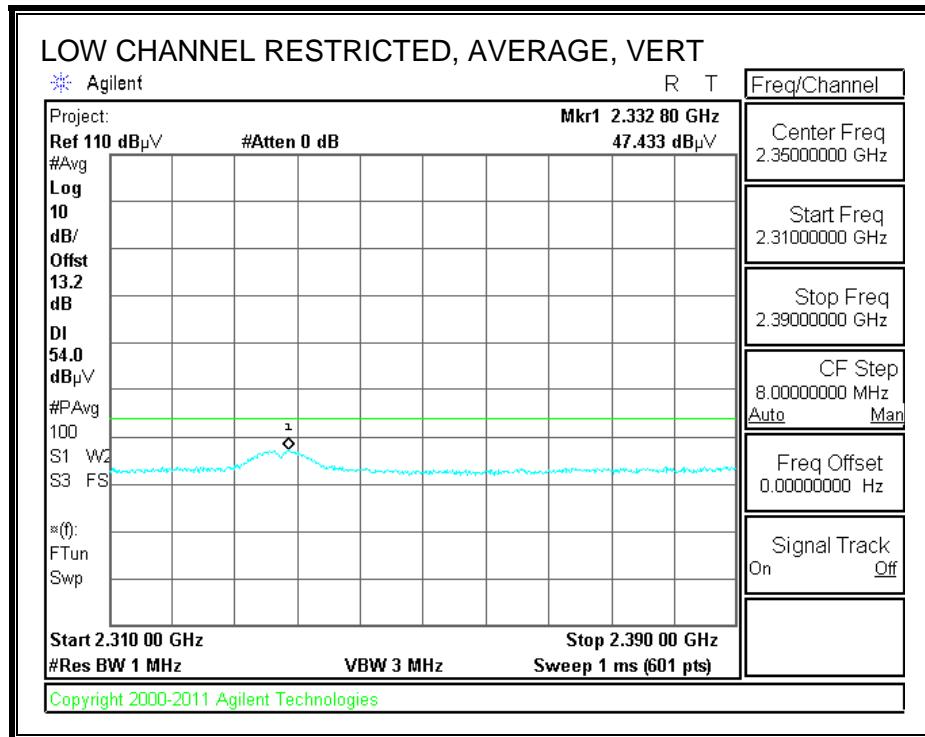
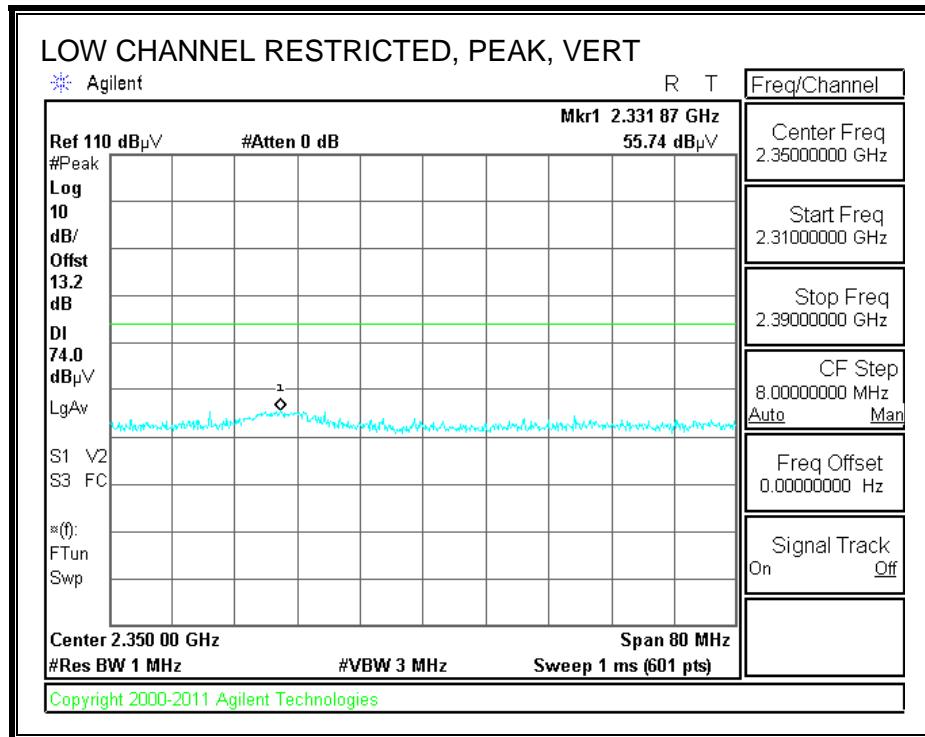




RESTRICTED BANDEDGE (LOW CHANNEL) CH2

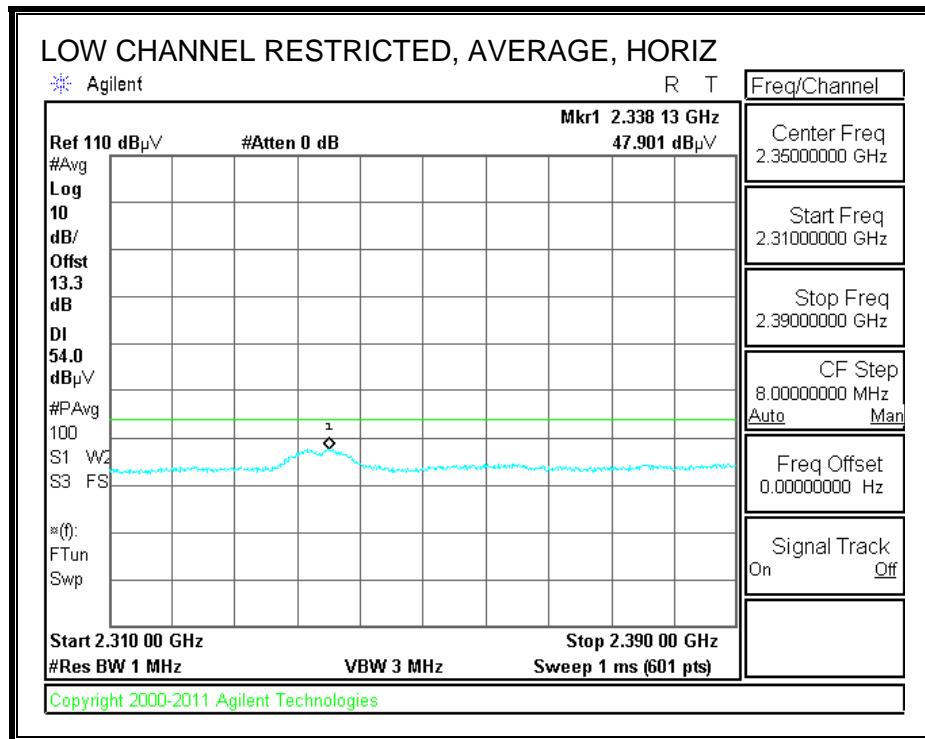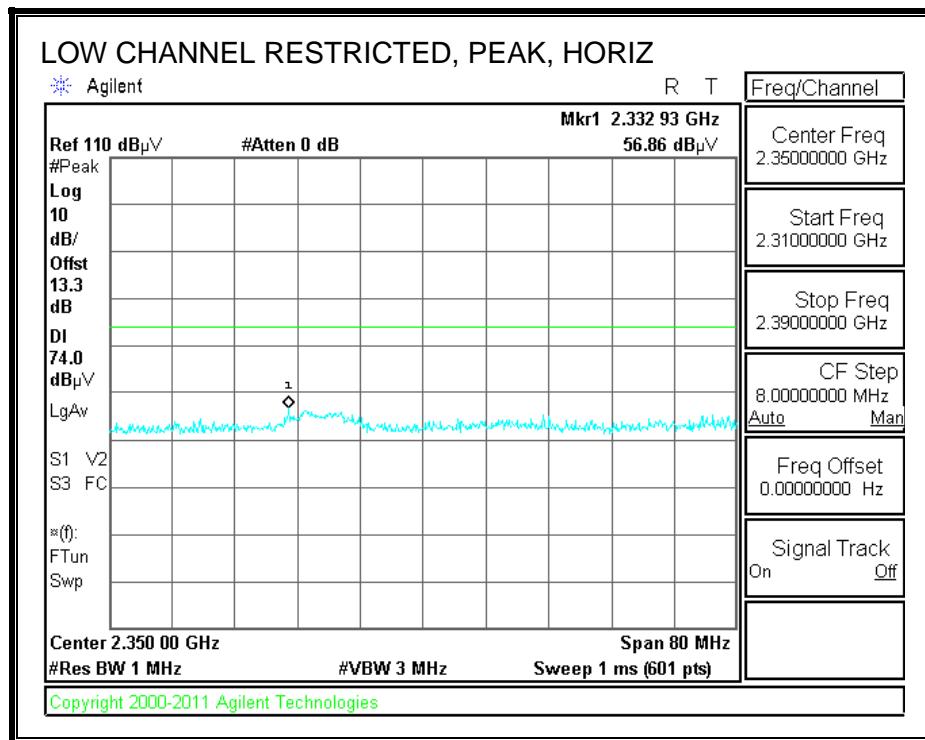

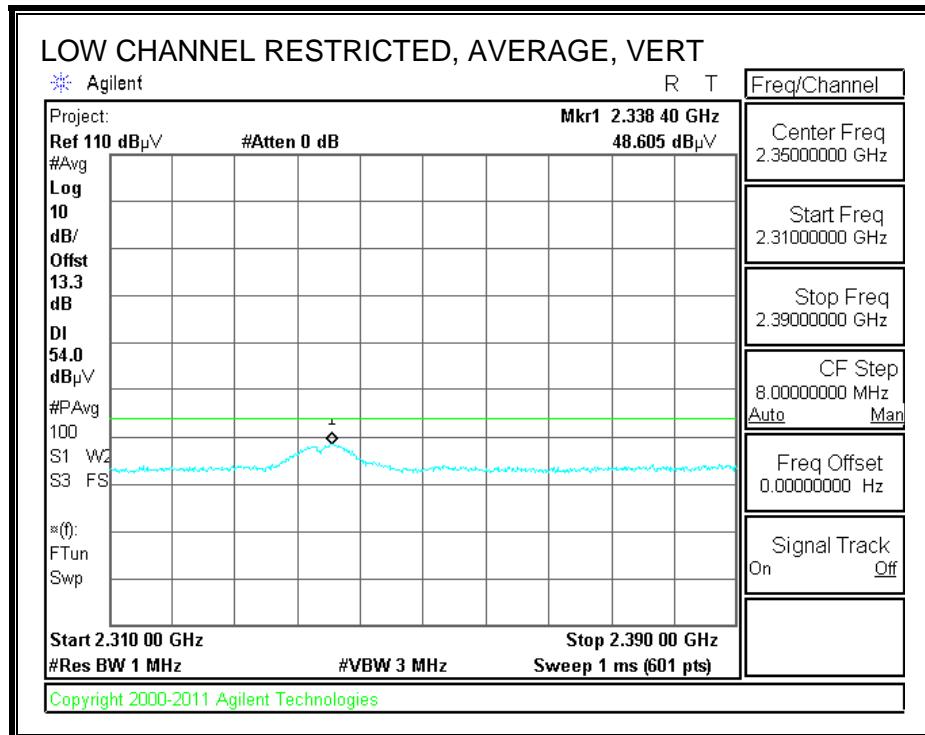
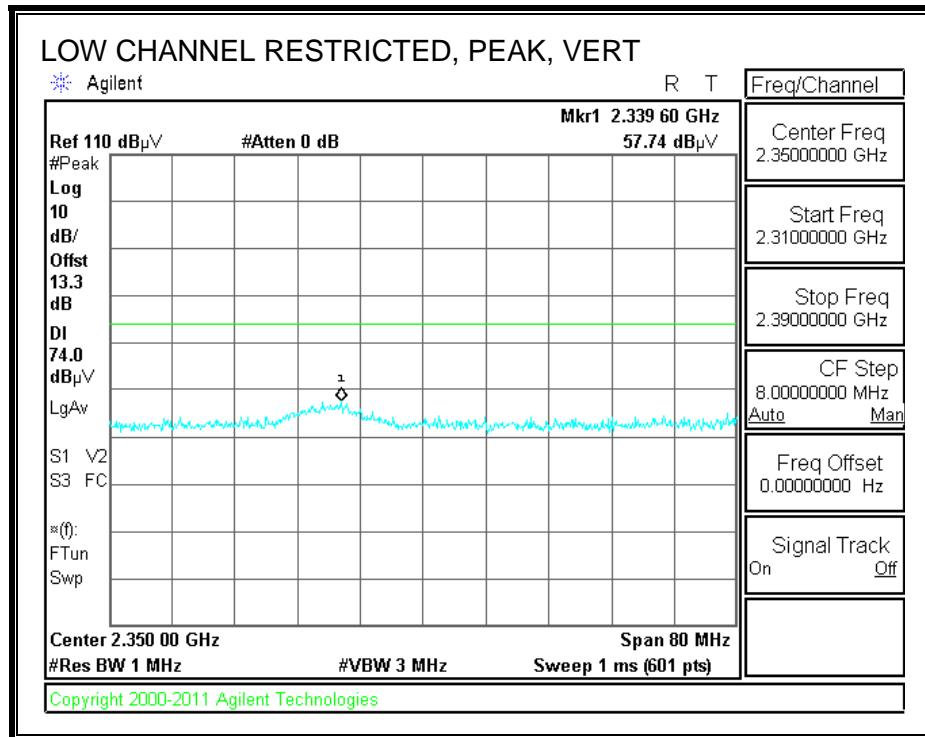




AUTHORIZED BANDEDGE (HIGH CHANNEL) CH10

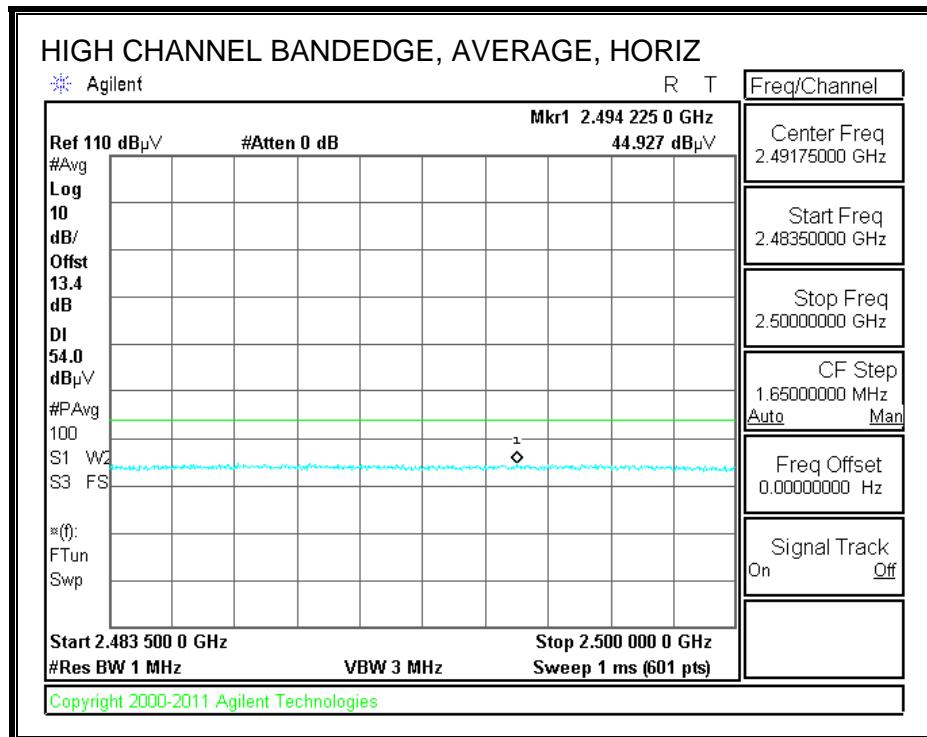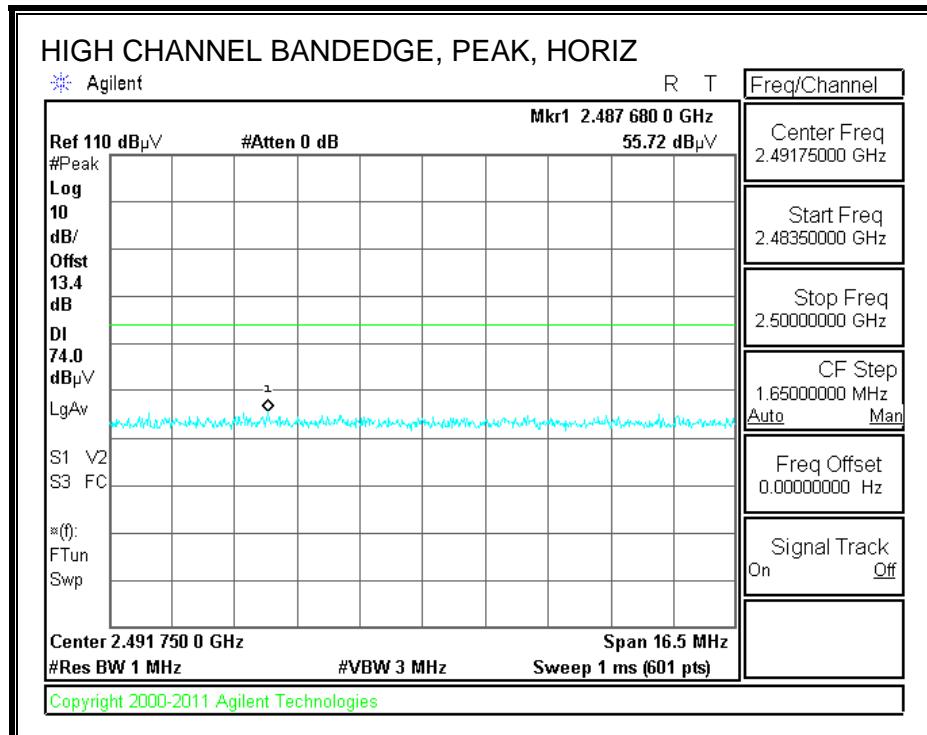

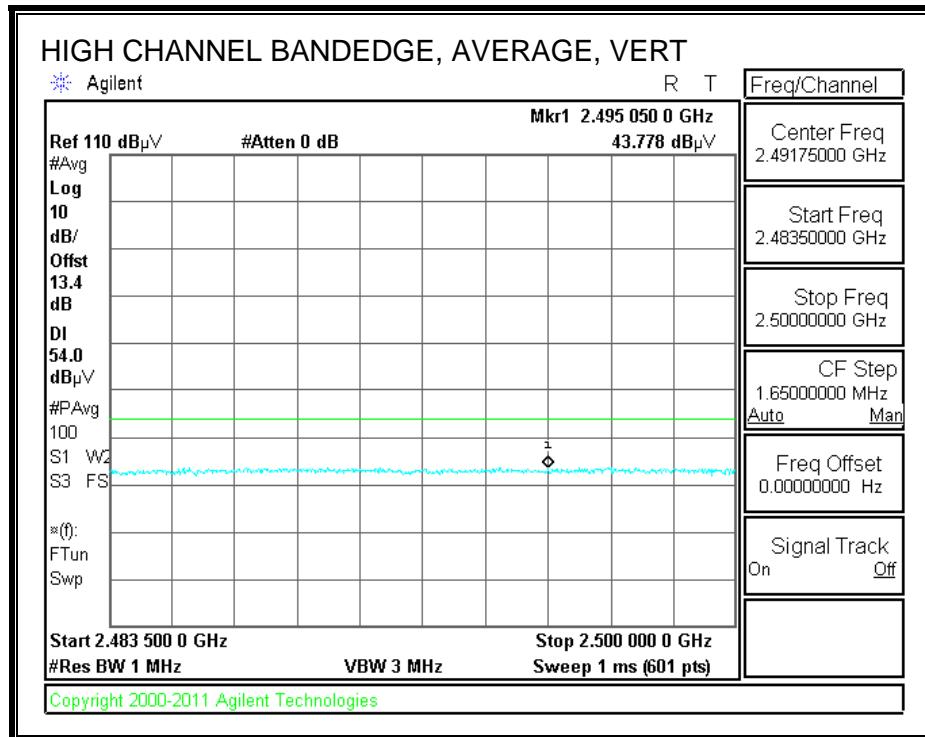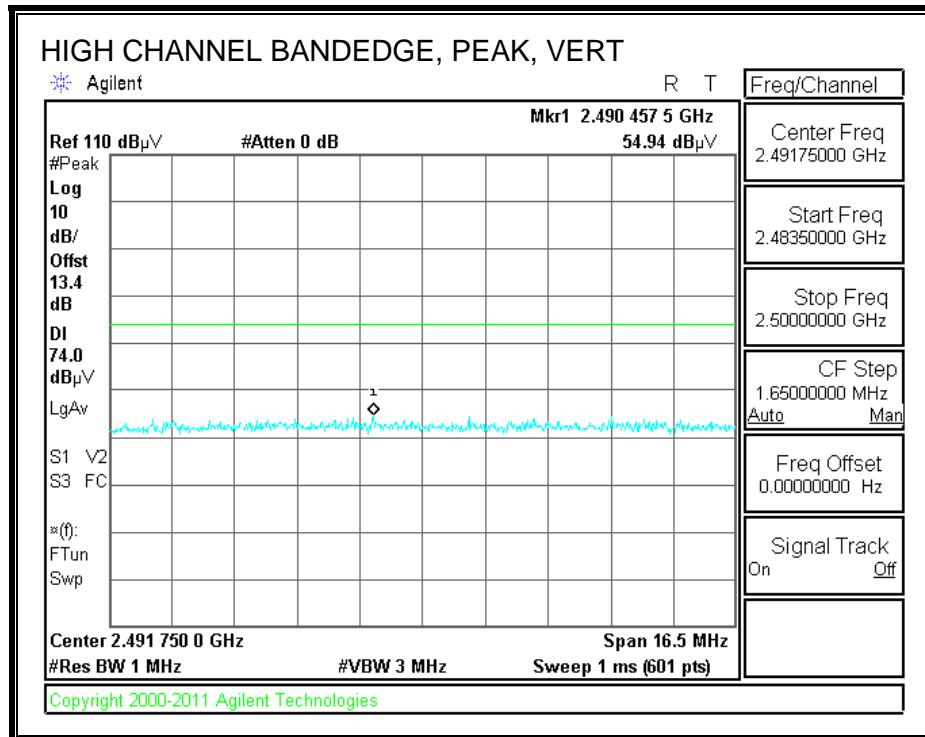

AUTHORIZED BANDEDGE (HIGH CHANNEL) CH11

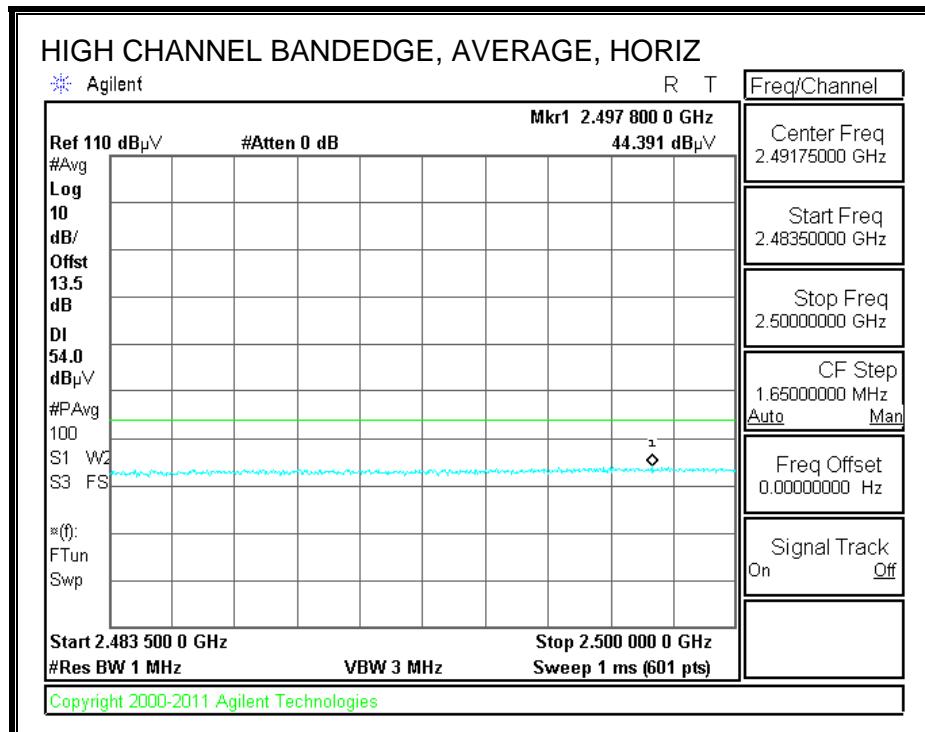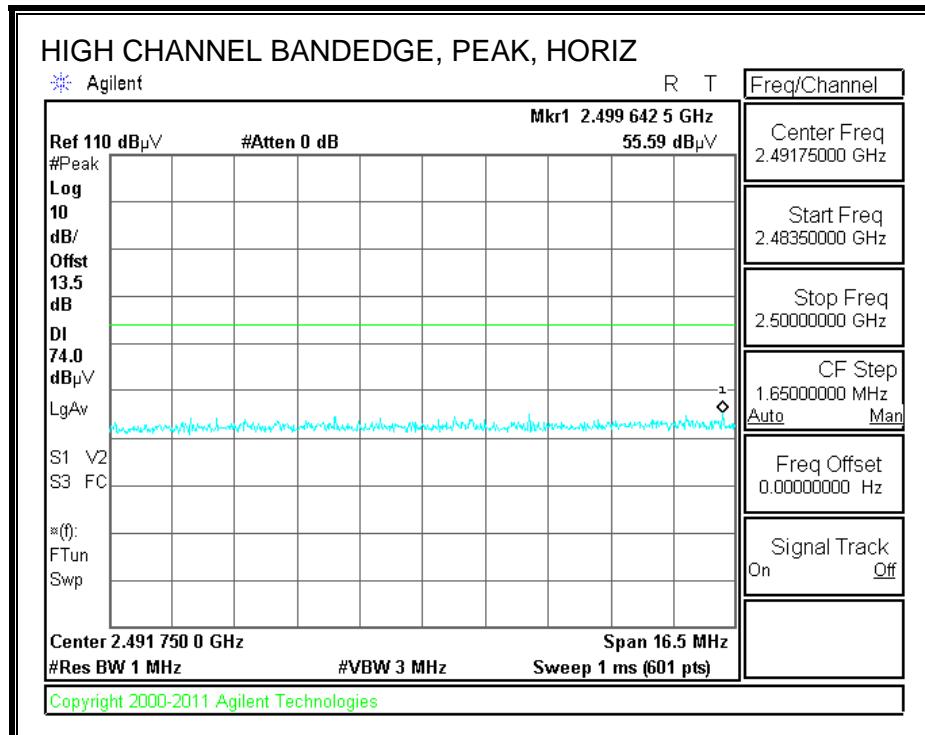

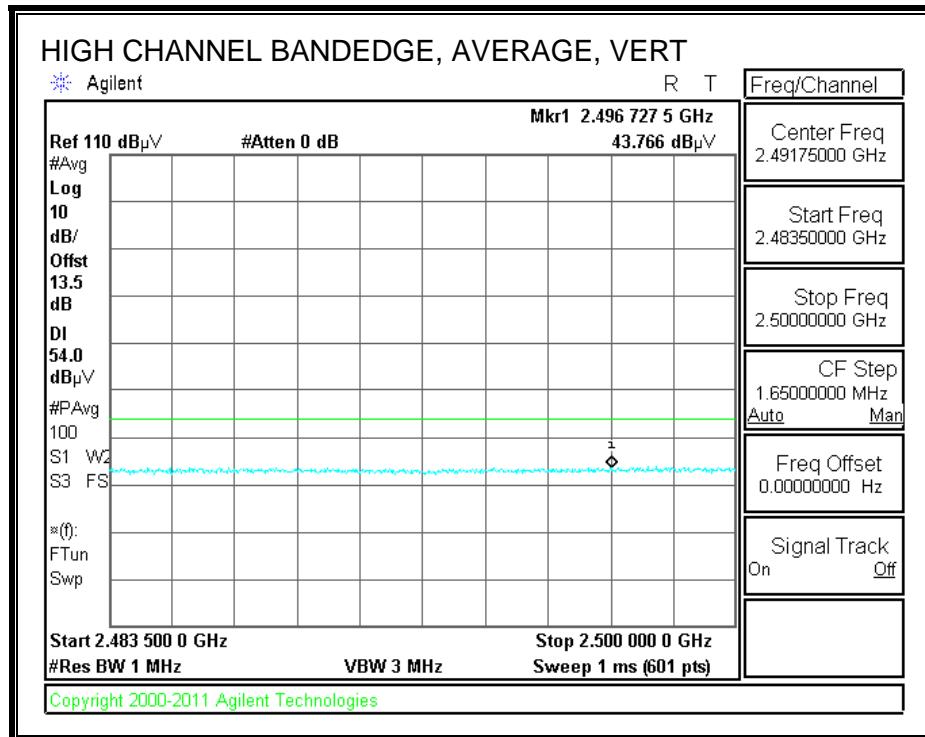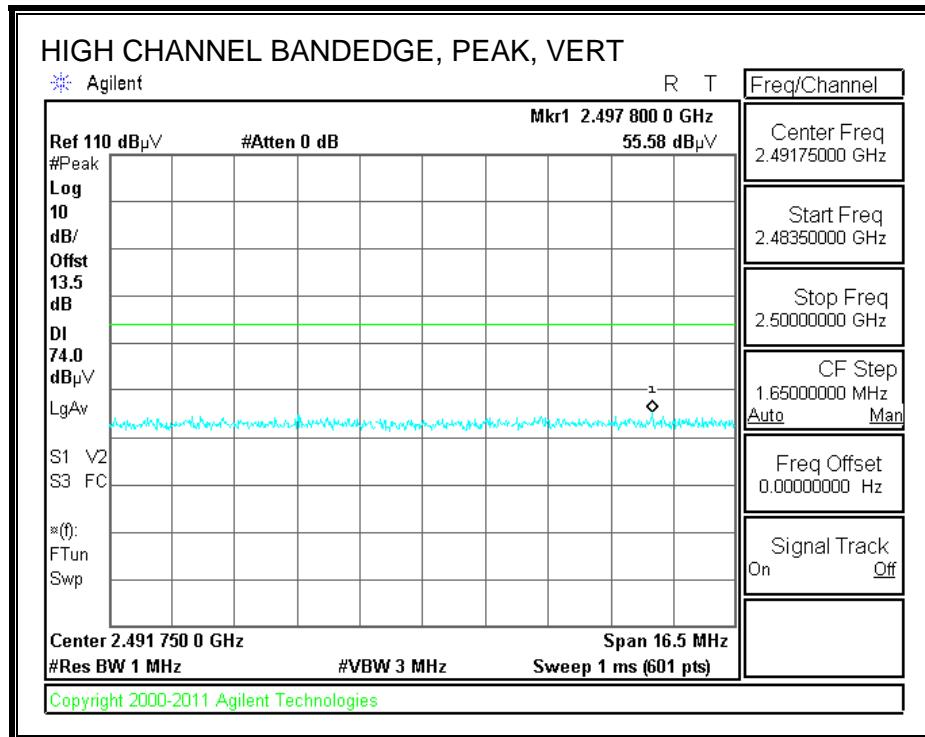

HARMONICS AND SPURIOUS EMISSIONS**High Frequency Measurement**
Compliance Certification Services, Fremont 5m Chamber

Test Engr: **Oliver Su**
 Date: **02/18/13**
 Project #: **12U14745**
 Company: **Apple**
 Test Target:
Mode Oper: 11b 3Tx Power= 24 dBm per Chain

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |


| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|------------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| Low Ch 2412MHz | | | | | | | | | | | | | |
| 4.824 | 3.0 | 39.6 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 45.5 | 74.0 | -28.6 | H | P | |
| 4.824 | 3.0 | 35.5 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 41.3 | 54.0 | -12.7 | H | A | |
| 12.060 | 3.0 | 33.3 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 52.1 | 74.0 | -21.9 | H | P | |
| 12.060 | 3.0 | 23.0 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 41.8 | 54.0 | -12.2 | H | A | |
| 4.824 | 3.0 | 38.1 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 43.9 | 74.0 | -30.1 | V | P | |
| 4.824 | 3.0 | 31.9 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 37.7 | 54.0 | -16.3 | V | A | |
| 12.060 | 3.0 | 33.0 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 51.8 | 74.0 | -22.2 | V | P | |
| 12.060 | 3.0 | 22.6 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 41.5 | 54.0 | -12.5 | V | A | |
| Mid Ch 2437MHz | | | | | | | | | | | | | |
| 4.874 | 3.0 | 40.6 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 46.5 | 74.0 | -27.5 | H | P | |
| 4.874 | 3.0 | 36.2 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 42.1 | 54.0 | -11.9 | H | A | |
| 7.311 | 3.0 | 34.7 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 46.5 | 74.0 | -27.5 | H | P | |
| 7.311 | 3.0 | 26.8 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 38.6 | 54.0 | -15.4 | H | A | |
| 4.874 | 3.0 | 36.1 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 42.0 | 74.0 | -32.0 | V | P | |
| 4.874 | 3.0 | 27.8 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 33.7 | 54.0 | -20.3 | V | A | |
| 7.311 | 3.0 | 34.4 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 46.2 | 74.0 | -27.8 | V | P | |
| 7.311 | 3.0 | 23.6 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 35.4 | 54.0 | -18.6 | V | A | |
| High ch 2462MHz | | | | | | | | | | | | | |
| 4.924 | 3.0 | 35.4 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 41.4 | 74.0 | -32.6 | V | P | |
| 4.924 | 3.0 | 25.2 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 31.2 | 54.0 | -22.8 | V | A | |
| 7.386 | 3.0 | 34.2 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 46.2 | 74.0 | -27.8 | V | P | |
| 7.386 | 3.0 | 23.8 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 35.8 | 54.0 | -18.2 | V | A | |
| 4.924 | 3.0 | 40.7 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 46.7 | 74.0 | -27.3 | H | P | |
| 4.924 | 3.0 | 36.4 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 42.4 | 54.0 | -11.6 | H | A | |
| 7.386 | 3.0 | 34.4 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 46.4 | 74.0 | -27.6 | H | P | |
| 7.386 | 3.0 | 26.6 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 38.5 | 54.0 | -15.5 | H | A | |


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.3. TX ABOVE 1 GHz 802.11b CDD 2TX MODE IN THE 2.4 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL) CH1


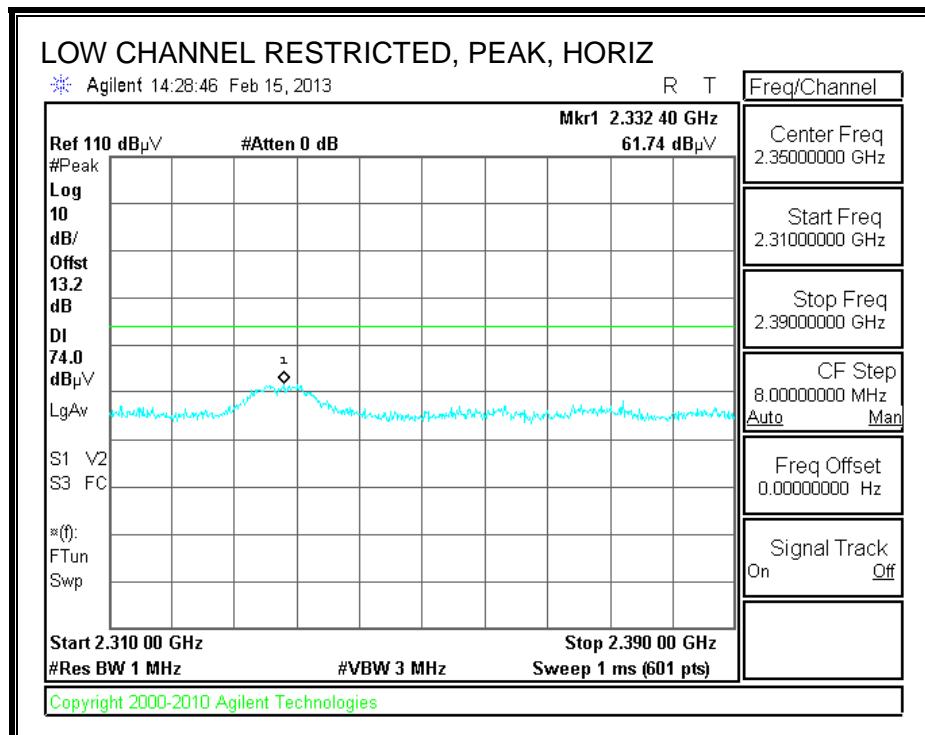


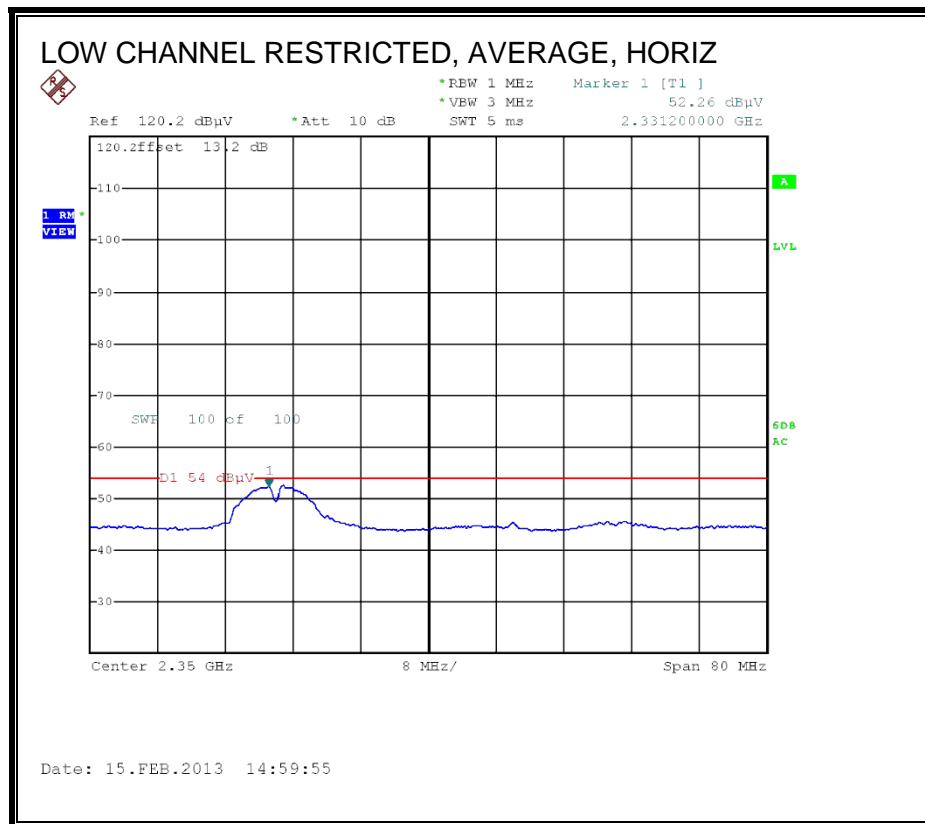

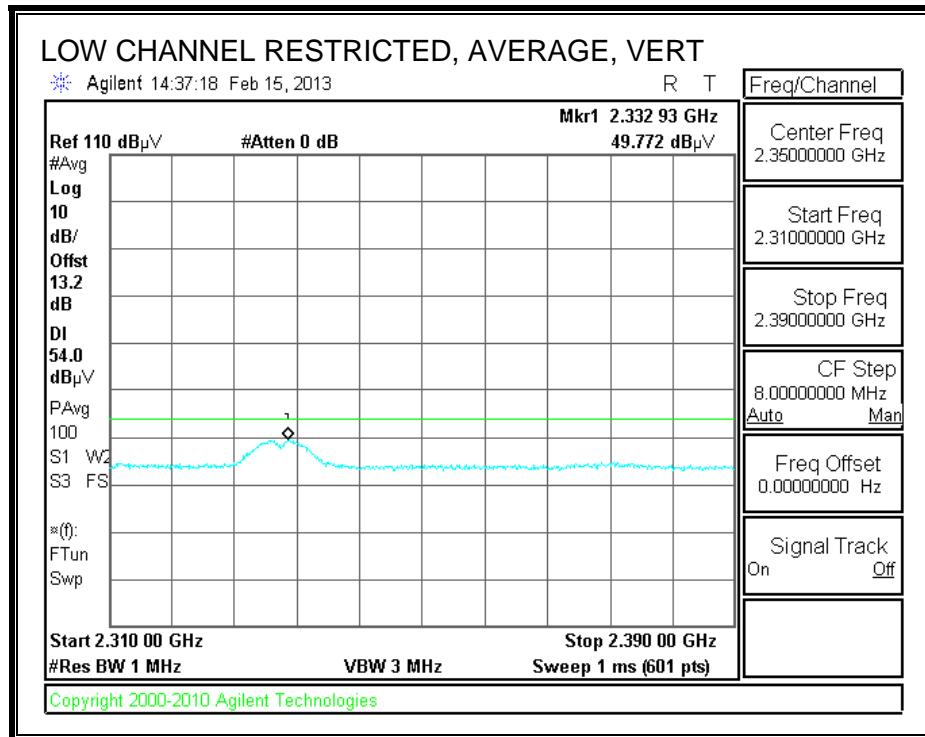
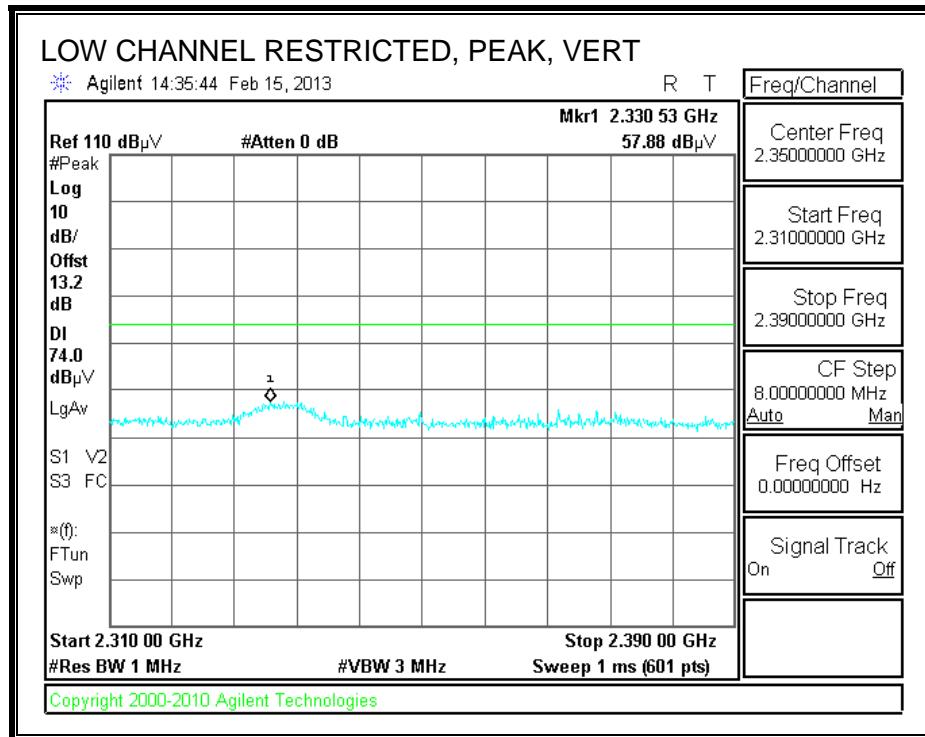




RESTRICTED BANDEDGE (LOW CHANNEL) CH2

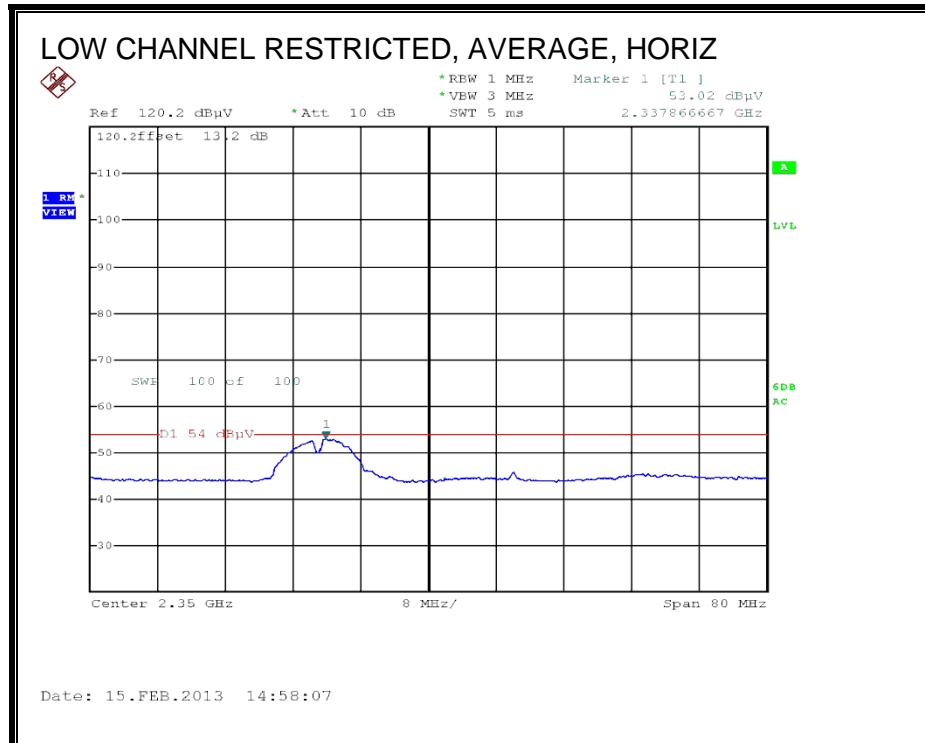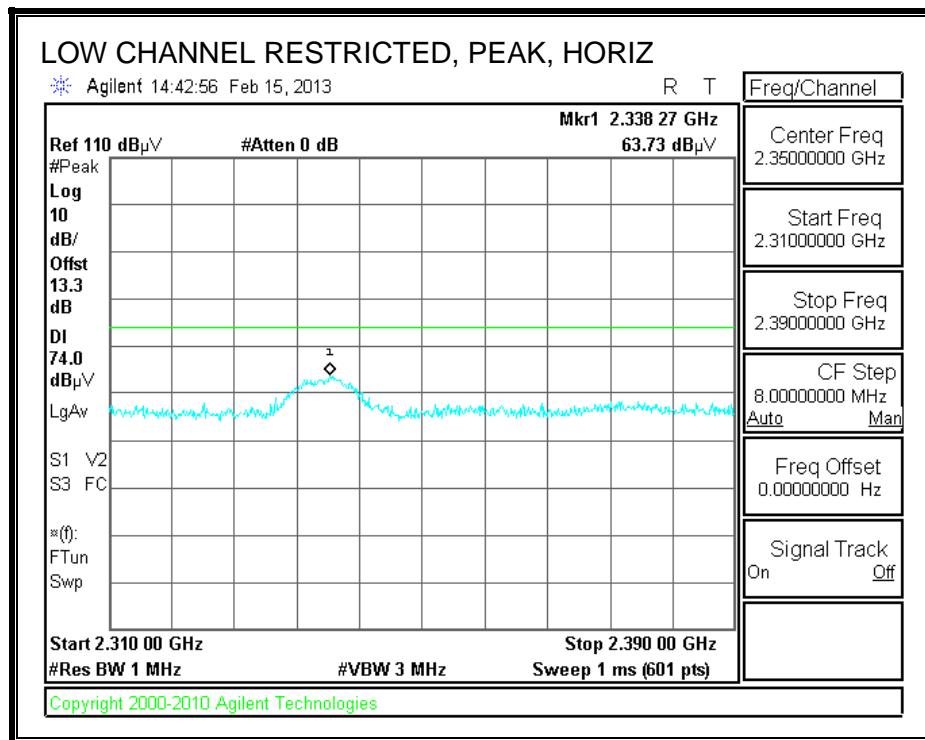

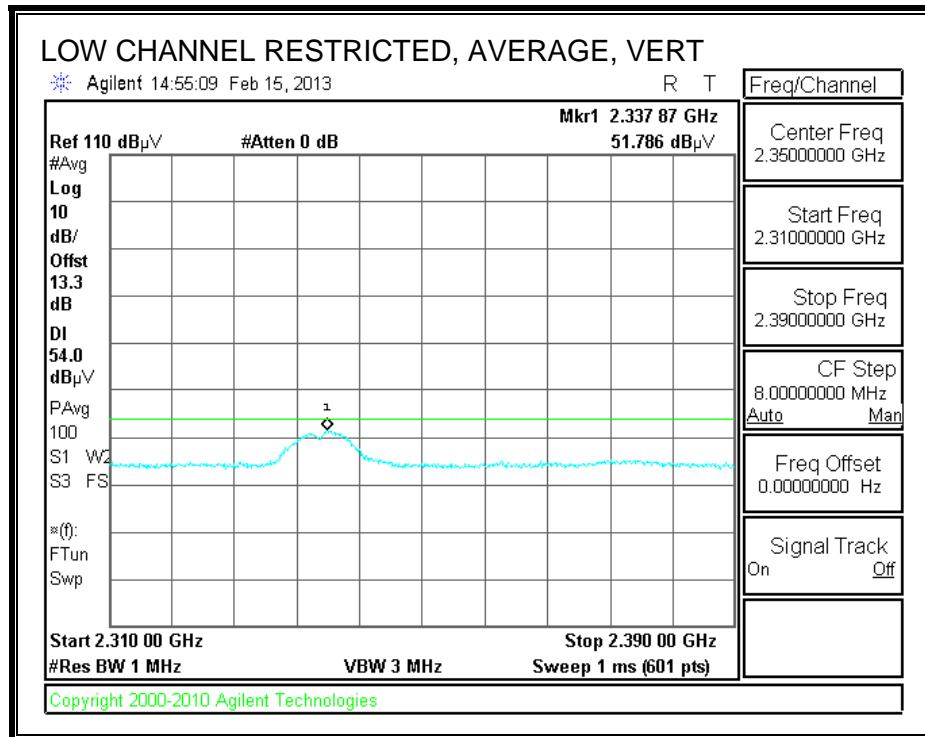
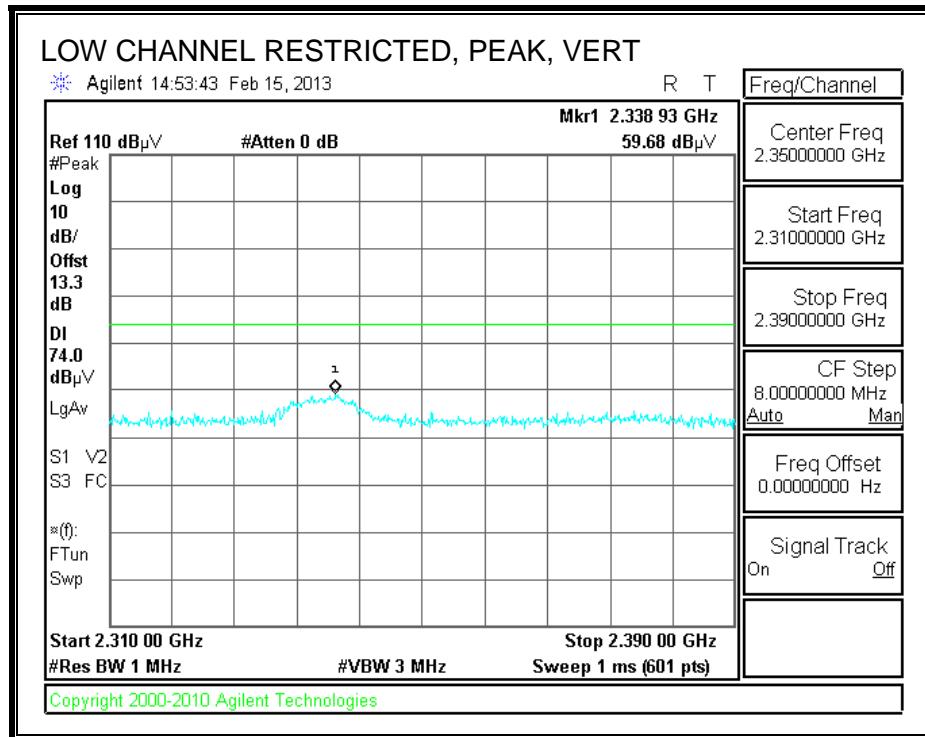




AUTHORIZED BANDEDGE (HIGH CHANNEL) CH10

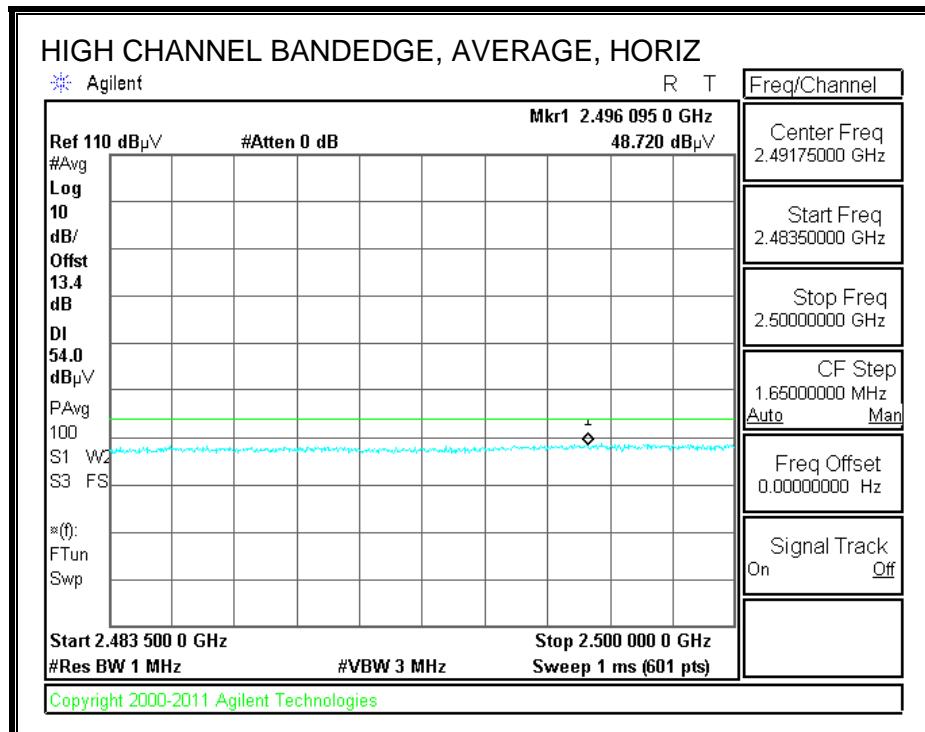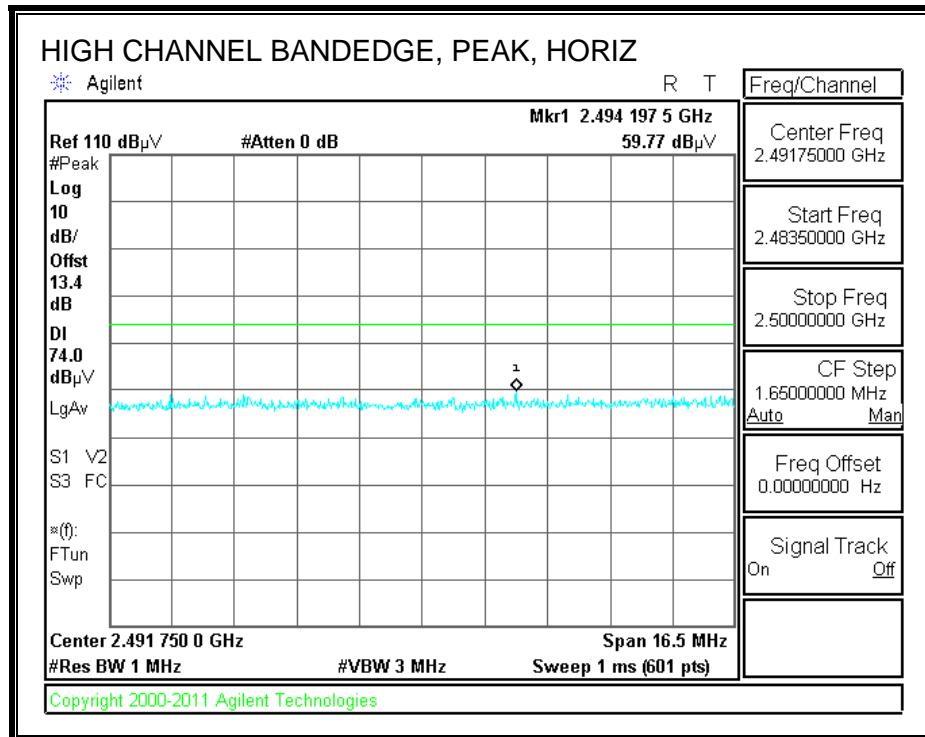

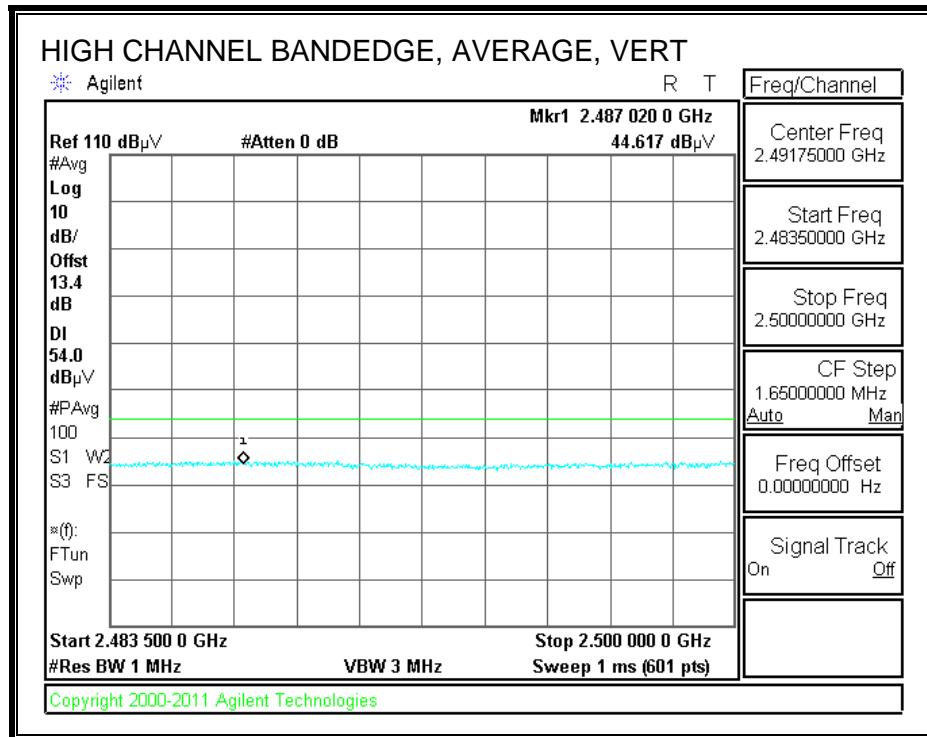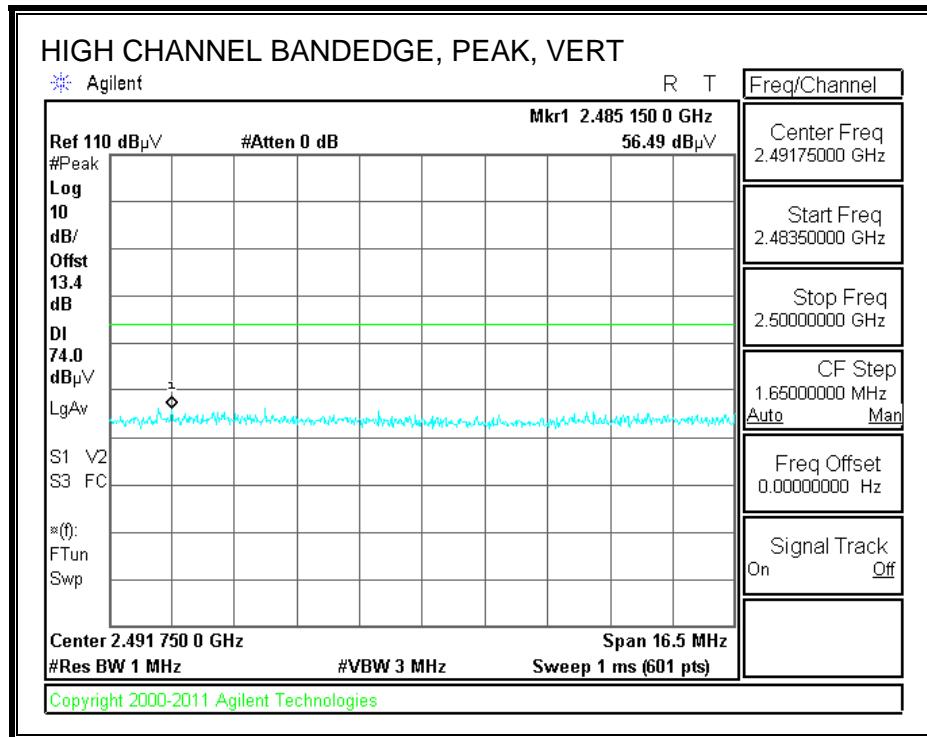

AUTHORIZED BANDEDGE (HIGH CHANNEL) CH11

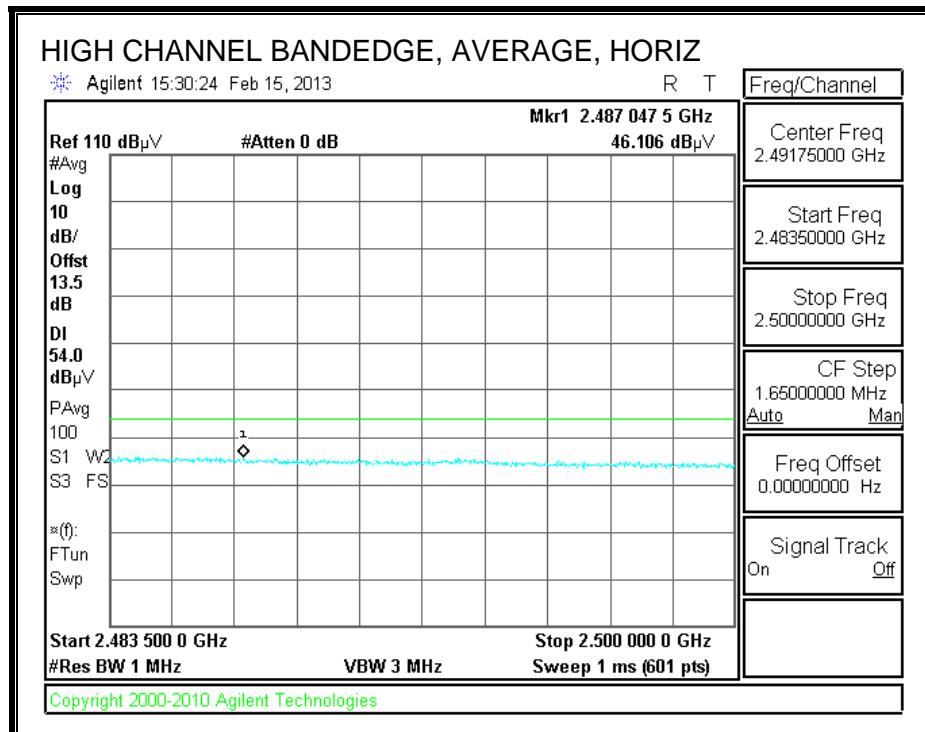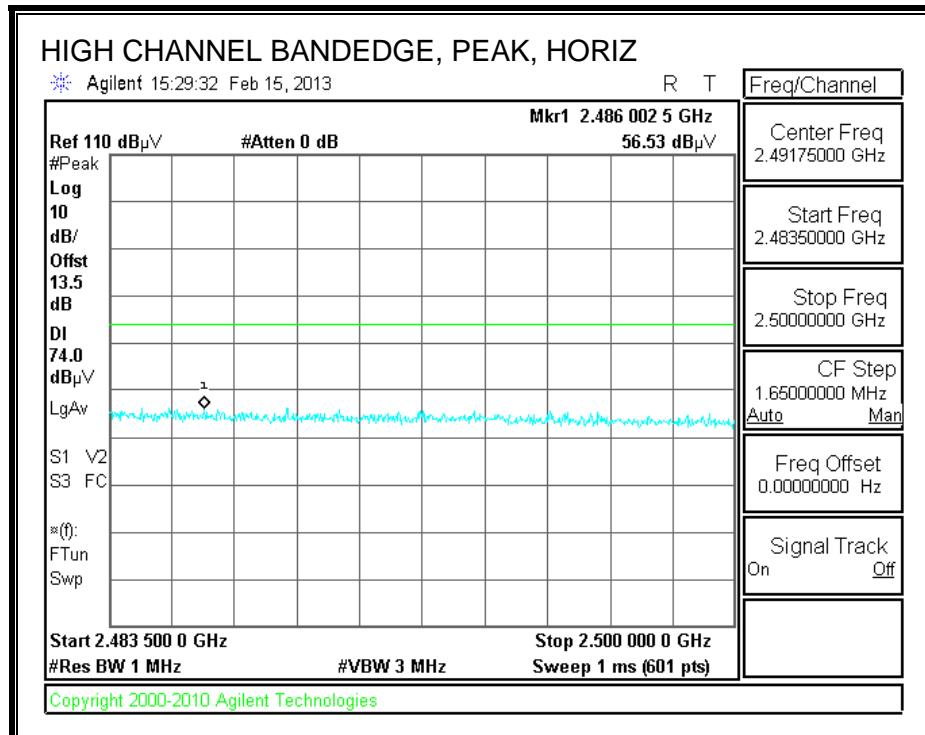

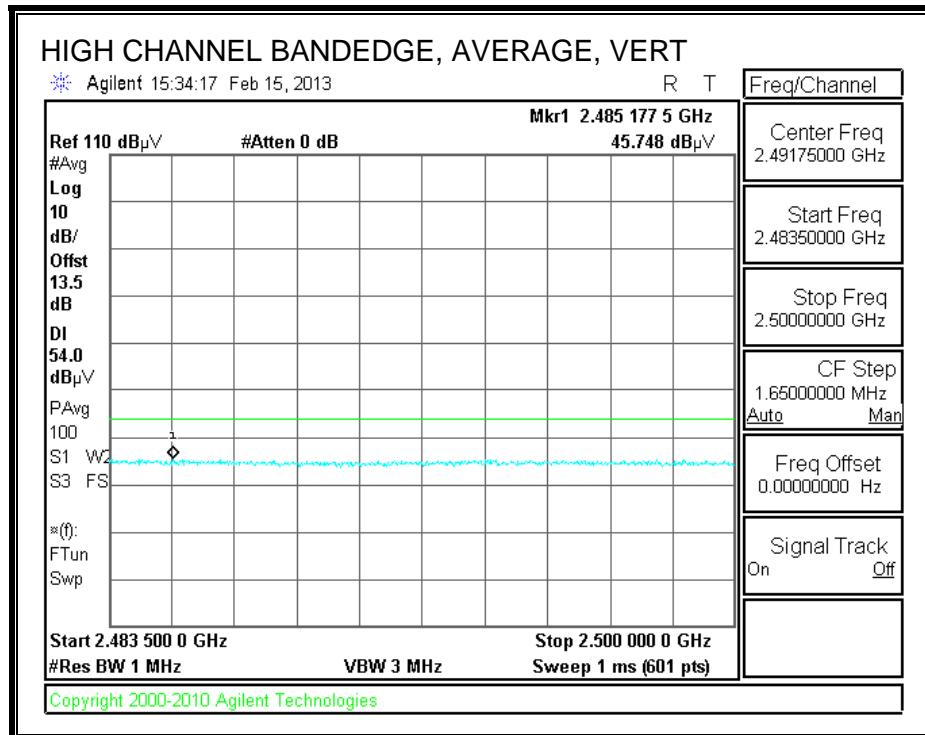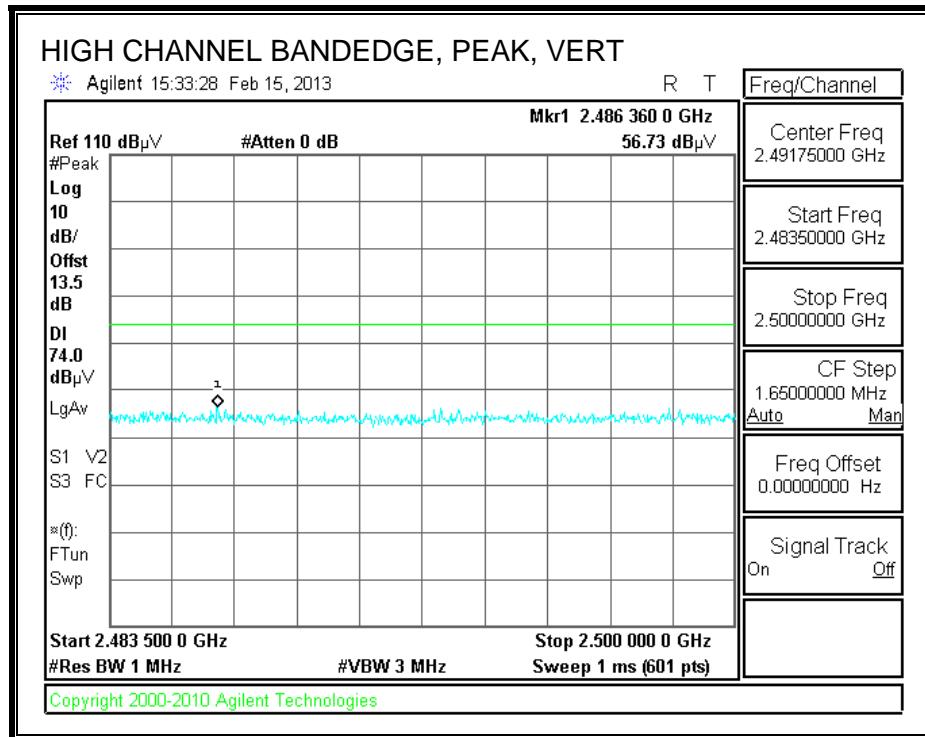

HARMONICS AND SPURIOUS EMISSIONS**High Frequency Measurement**
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Oliver Su
 Date: 02/18/13
 Project #: 12U14745
 Company: Apple
 Test Target:
 Mode Oper: 11b 3Tx Power= 24 dBm per Chain

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |


| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|------------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| Low Ch 2412MHz | | | | | | | | | | | | | |
| 4.824 | 3.0 | 39.6 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 45.5 | 74.0 | -28.6 | H | P | |
| 4.824 | 3.0 | 35.5 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 41.3 | 54.0 | -12.7 | H | A | |
| 12.060 | 3.0 | 33.3 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 52.1 | 74.0 | -21.9 | H | P | |
| 12.060 | 3.0 | 23.0 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 41.8 | 54.0 | -12.2 | H | A | |
| 4.824 | 3.0 | 38.1 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 43.9 | 74.0 | -30.1 | V | P | |
| 4.824 | 3.0 | 31.9 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 37.7 | 54.0 | -16.3 | V | A | |
| 12.060 | 3.0 | 33.0 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 51.8 | 74.0 | -22.2 | V | P | |
| 12.060 | 3.0 | 22.6 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 41.5 | 54.0 | -12.5 | V | A | |
| Mid Ch 2437MHz | | | | | | | | | | | | | |
| 4.874 | 3.0 | 40.6 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 46.5 | 74.0 | -27.5 | H | P | |
| 4.874 | 3.0 | 36.2 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 42.1 | 54.0 | -11.9 | H | A | |
| 7.311 | 3.0 | 34.7 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 46.5 | 74.0 | -27.5 | H | P | |
| 7.311 | 3.0 | 26.8 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 38.6 | 54.0 | -15.4 | H | A | |
| 4.874 | 3.0 | 36.1 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 42.0 | 74.0 | -32.0 | V | P | |
| 4.874 | 3.0 | 27.8 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 33.7 | 54.0 | -20.3 | V | A | |
| 7.311 | 3.0 | 34.4 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 46.2 | 74.0 | -27.8 | V | P | |
| 7.311 | 3.0 | 23.6 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 35.4 | 54.0 | -18.6 | V | A | |
| High ch 2462MHz | | | | | | | | | | | | | |
| 4.924 | 3.0 | 35.4 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 41.4 | 74.0 | -32.6 | V | P | |
| 4.924 | 3.0 | 25.2 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 31.2 | 54.0 | -22.8 | V | A | |
| 7.386 | 3.0 | 34.2 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 46.2 | 74.0 | -27.8 | V | P | |
| 7.386 | 3.0 | 23.8 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 35.8 | 54.0 | -18.2 | V | A | |
| 4.924 | 3.0 | 40.7 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 46.7 | 74.0 | -27.3 | H | P | |
| 4.924 | 3.0 | 36.4 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 42.4 | 54.0 | -11.6 | H | A | |
| 7.386 | 3.0 | 34.4 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 46.4 | 74.0 | -27.6 | H | P | |
| 7.386 | 3.0 | 26.6 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 38.5 | 54.0 | -15.5 | H | A | |


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.4. TX ABOVE 1 GHz 802.11b CDD 3TX MODE IN THE 2.4 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL) CH1


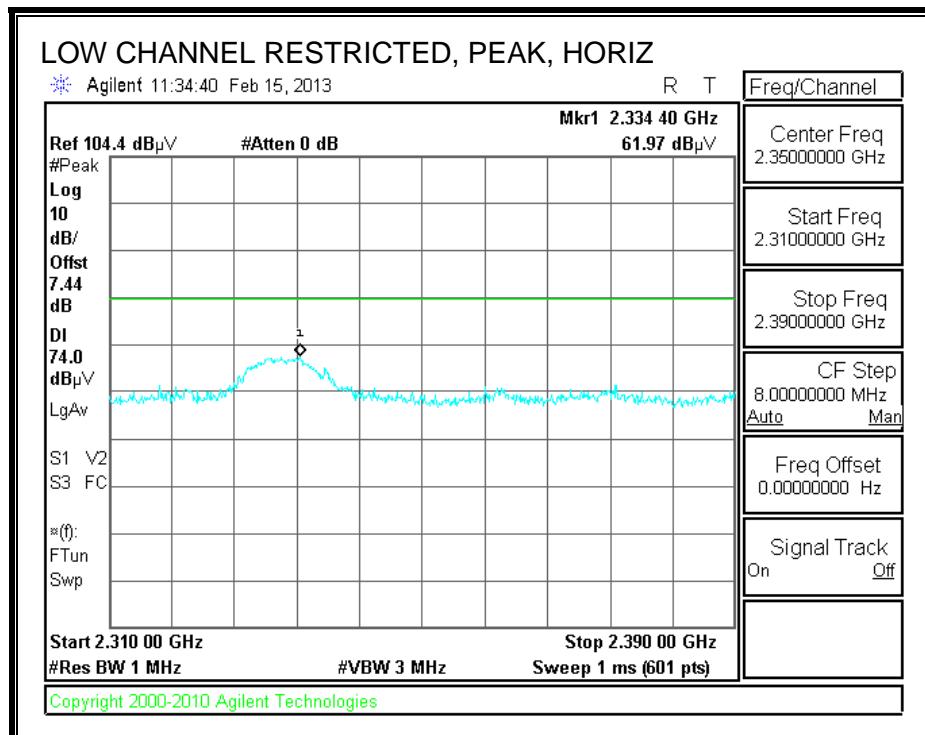


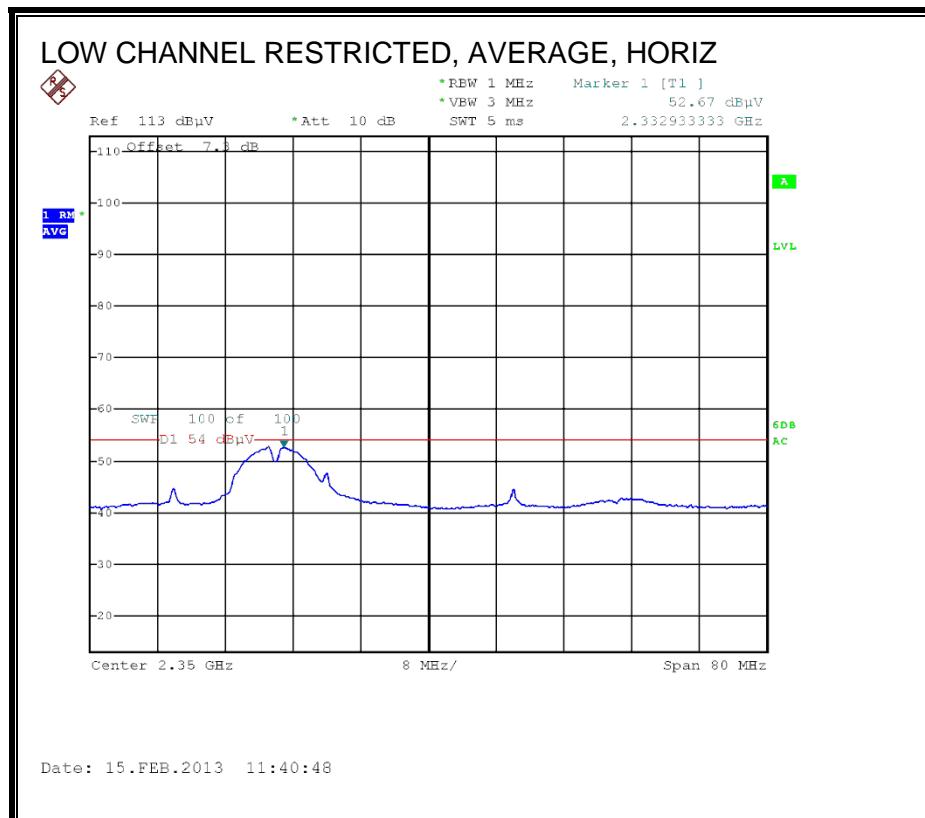

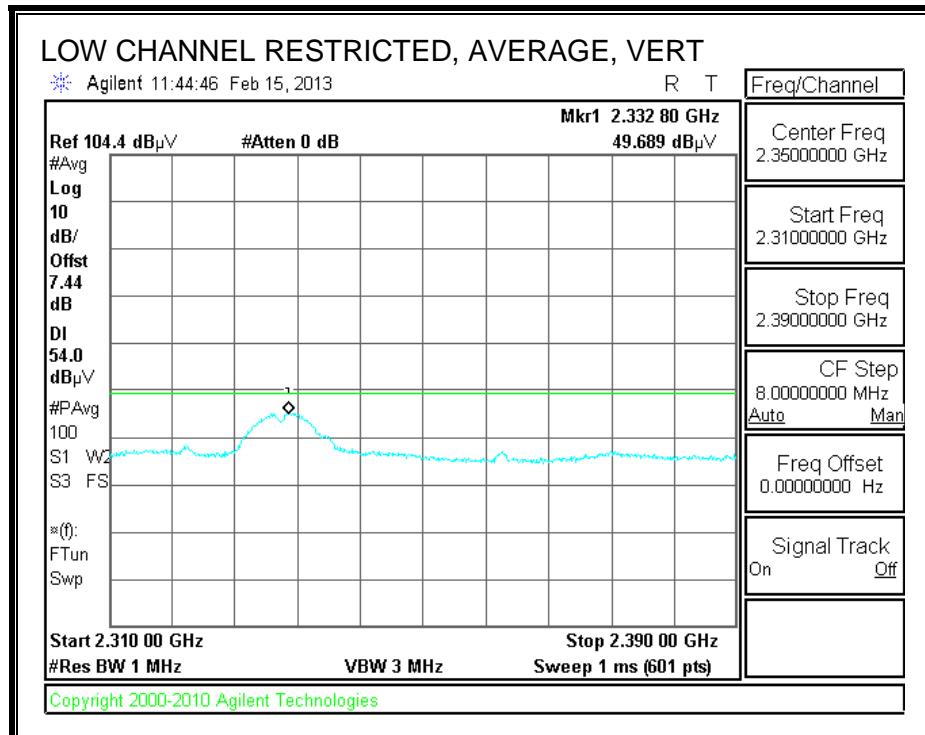
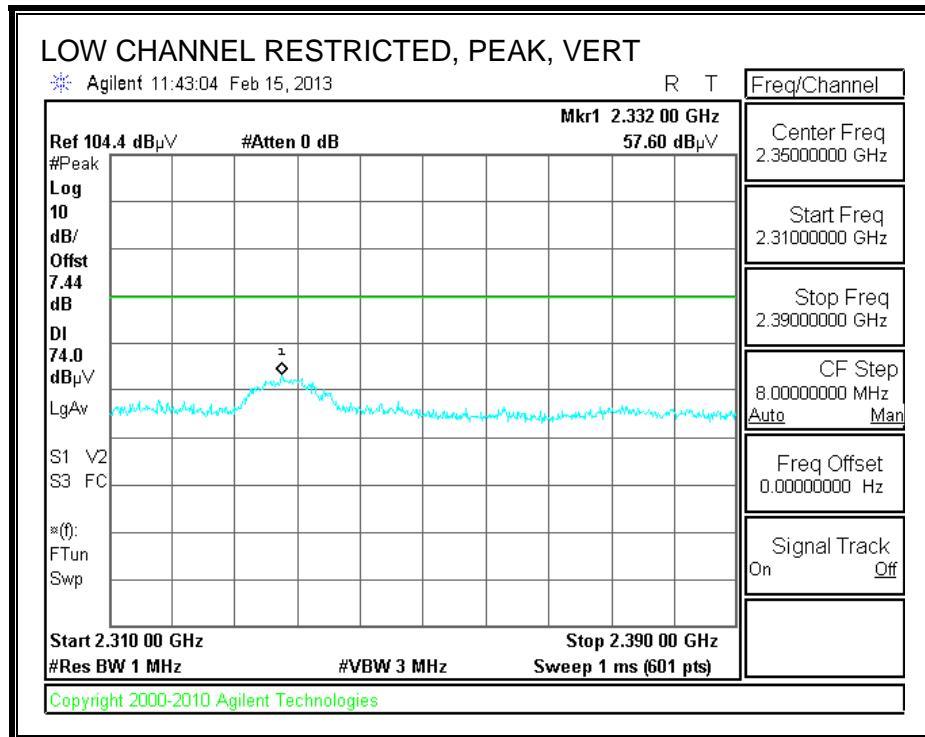




RESTRICTED BANDEDGE (LOW CHANNEL) CH2

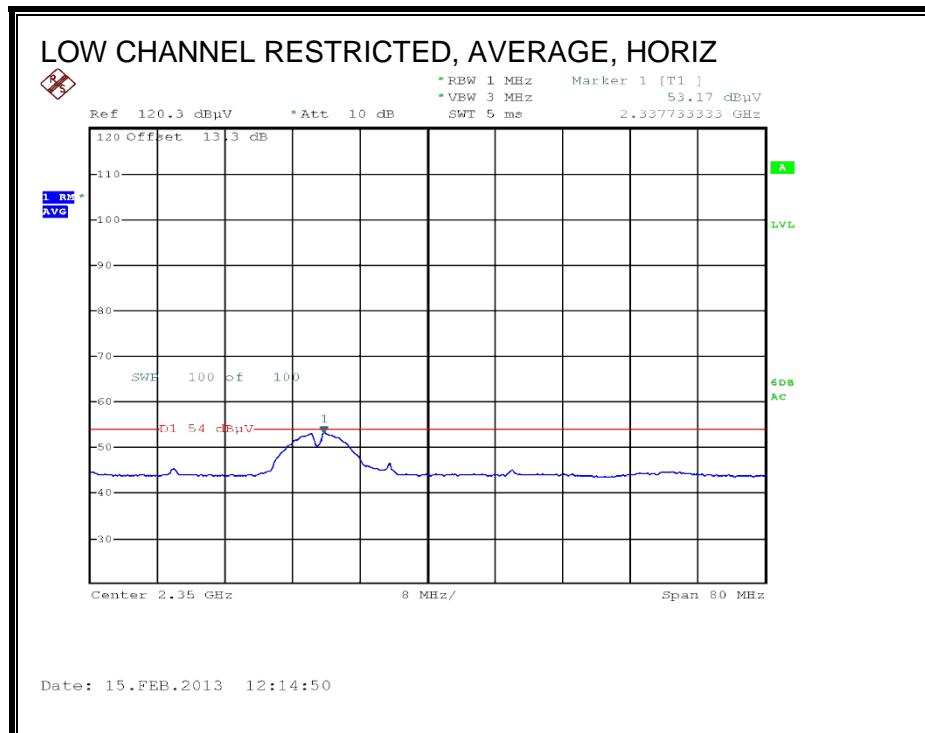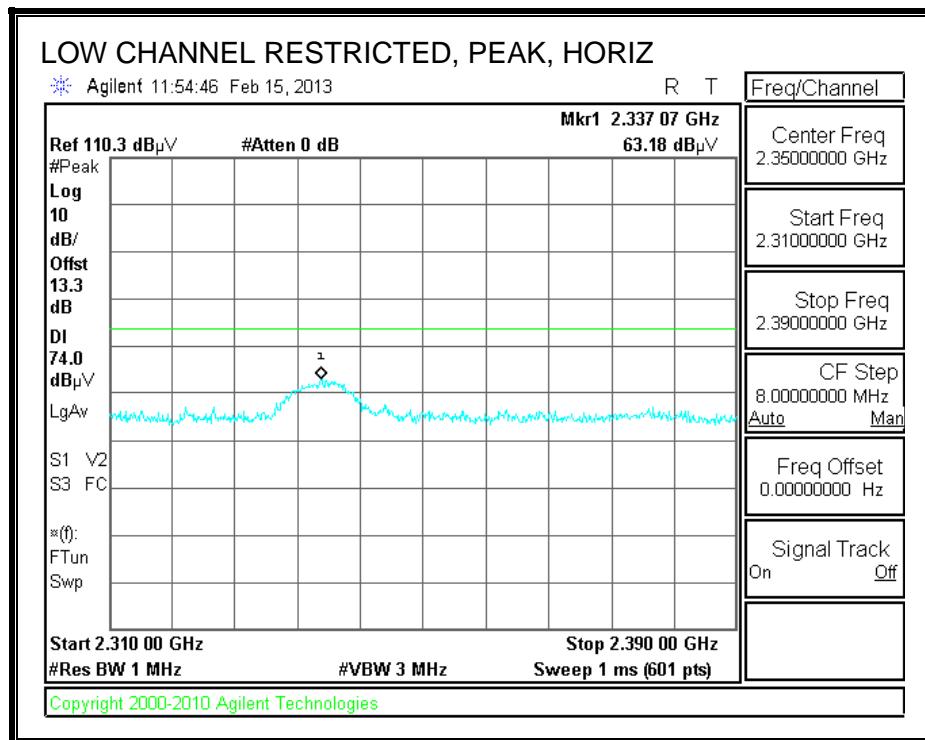

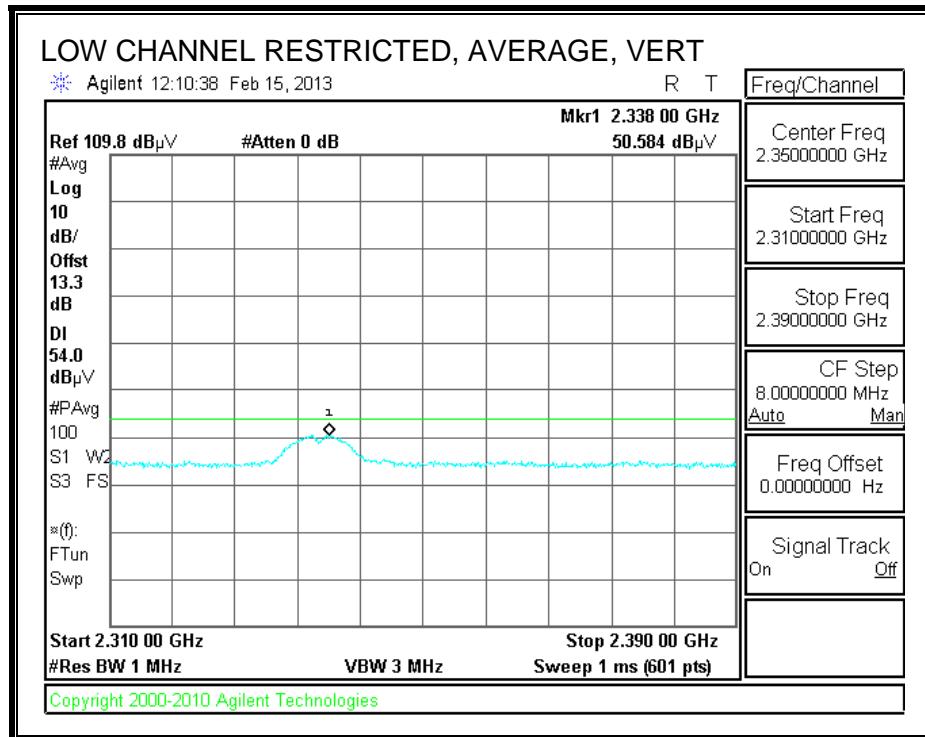
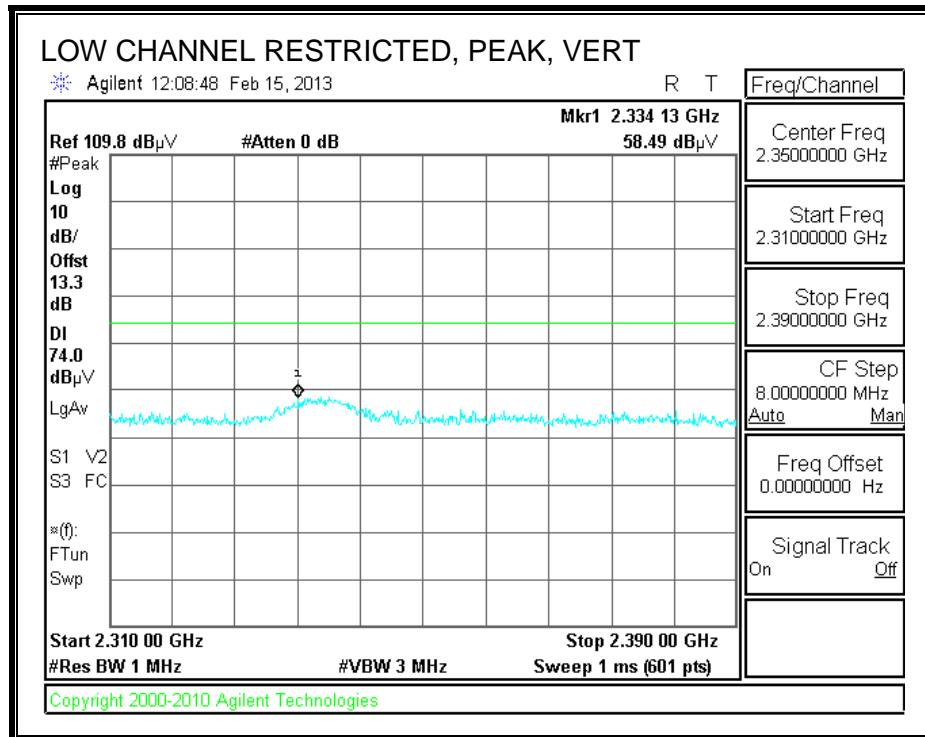




AUTHORIZED BANDEDGE (HIGH CHANNEL) CH10

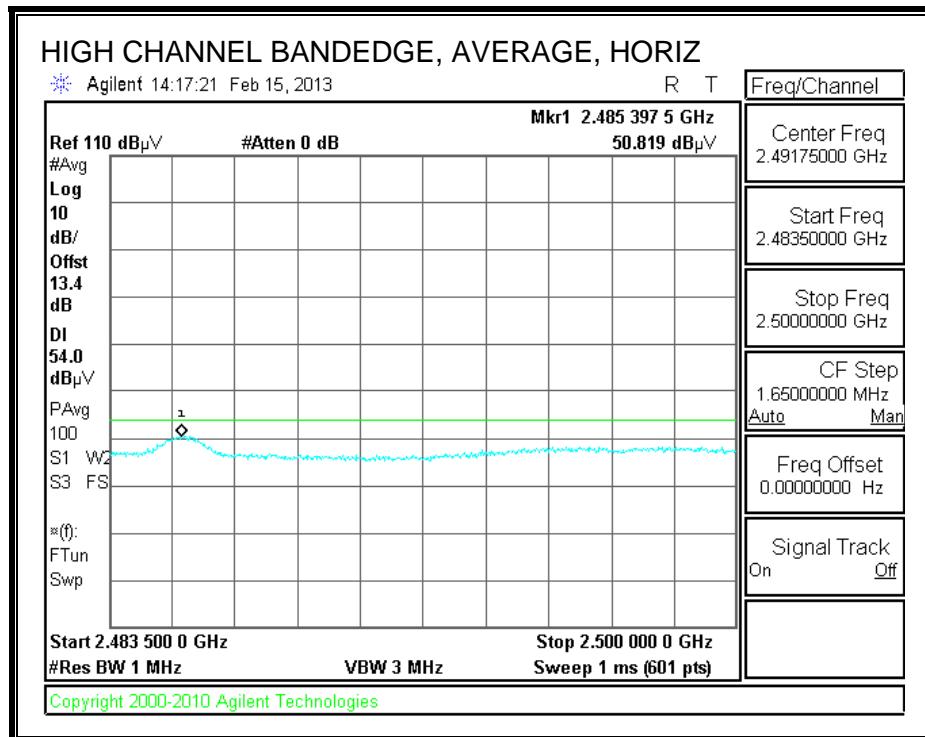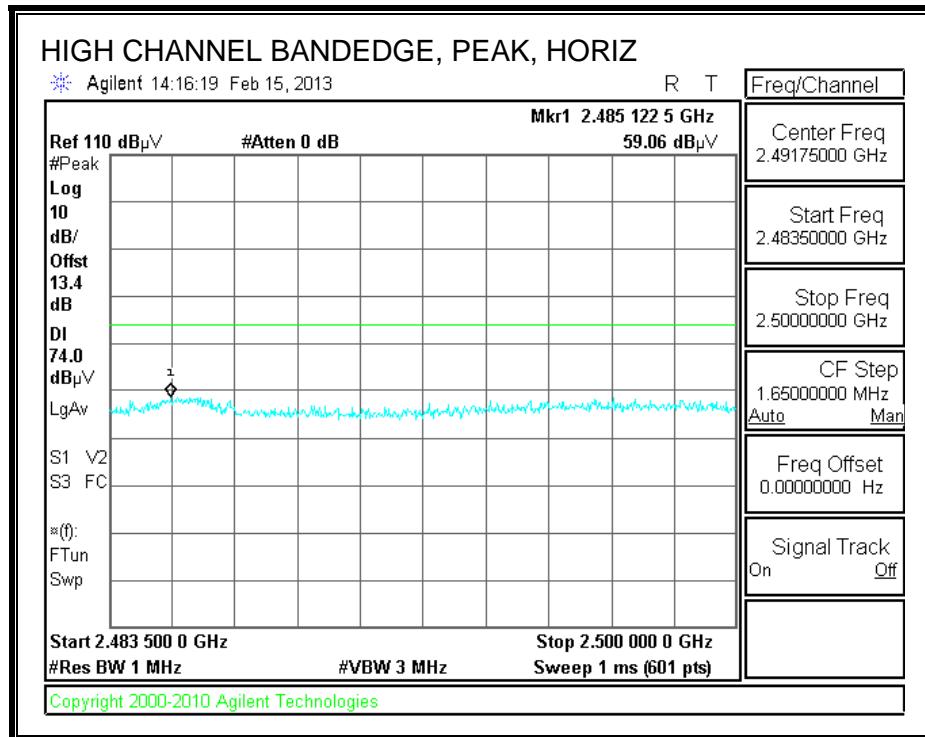

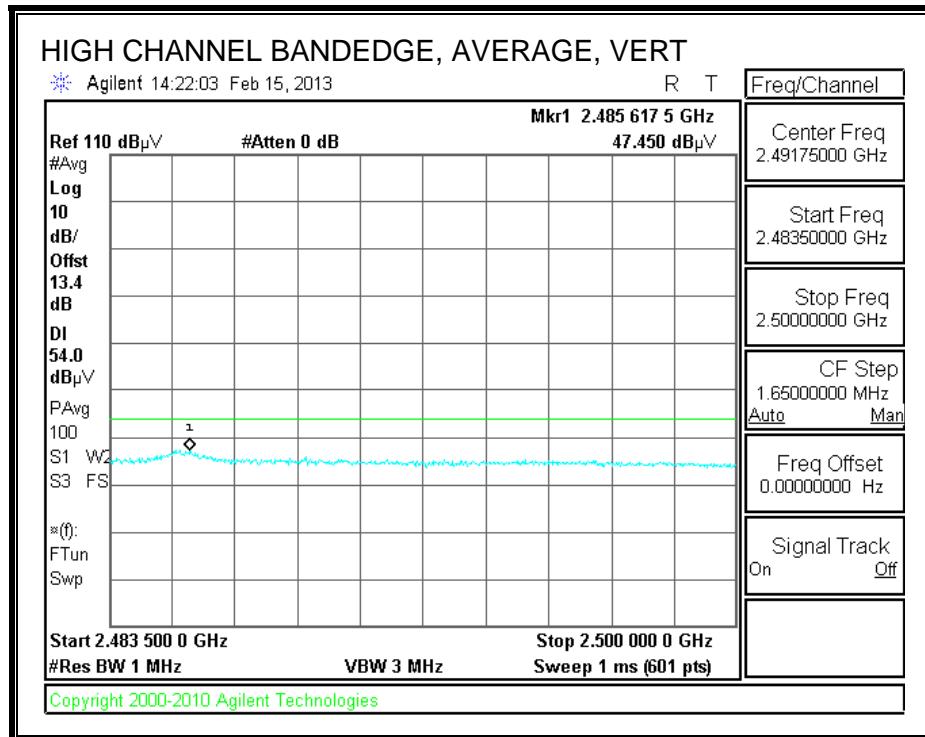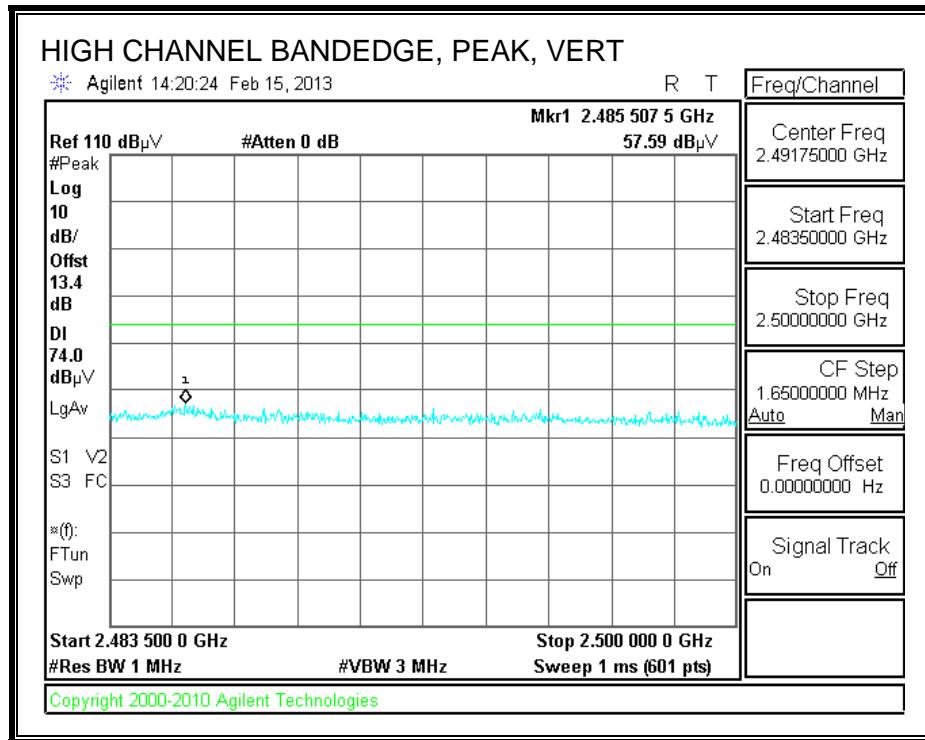

AUTHORIZED BANDEDGE (HIGH CHANNEL) CH11

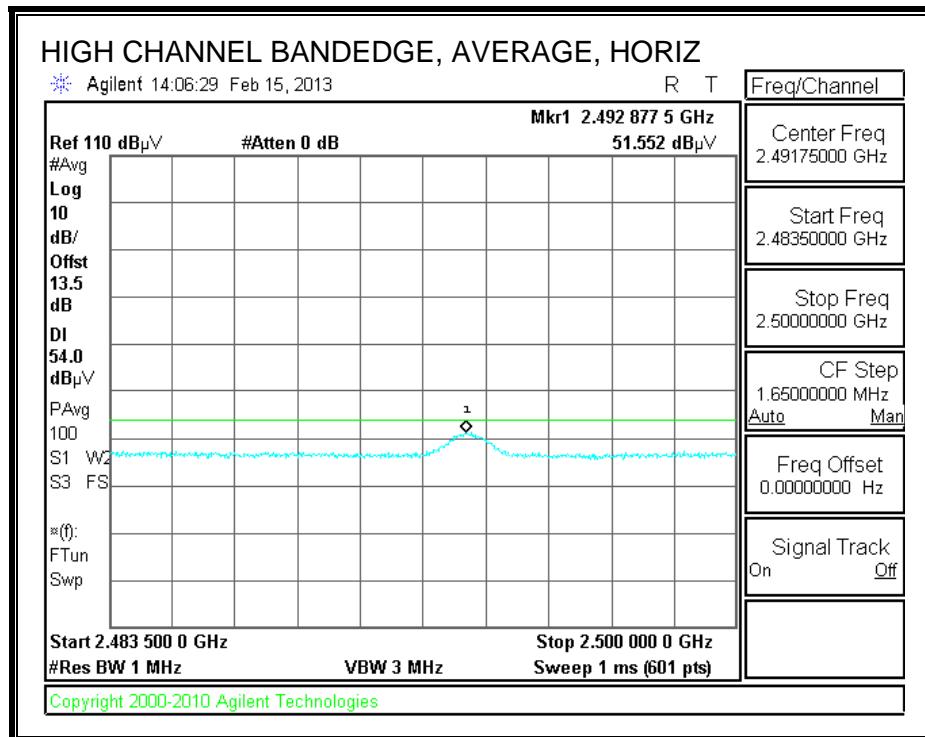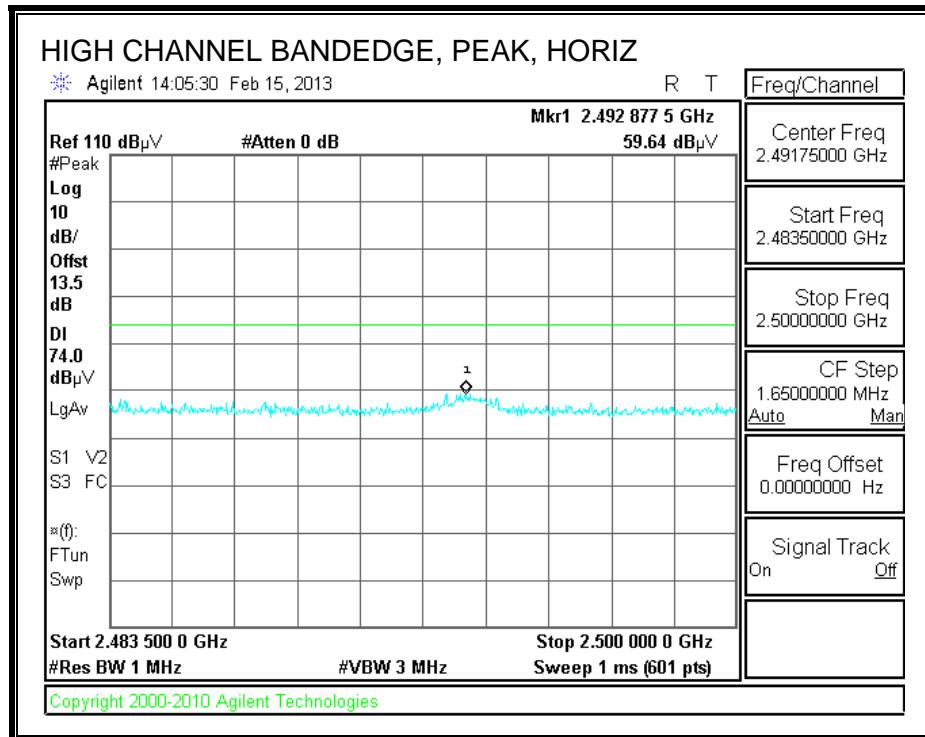

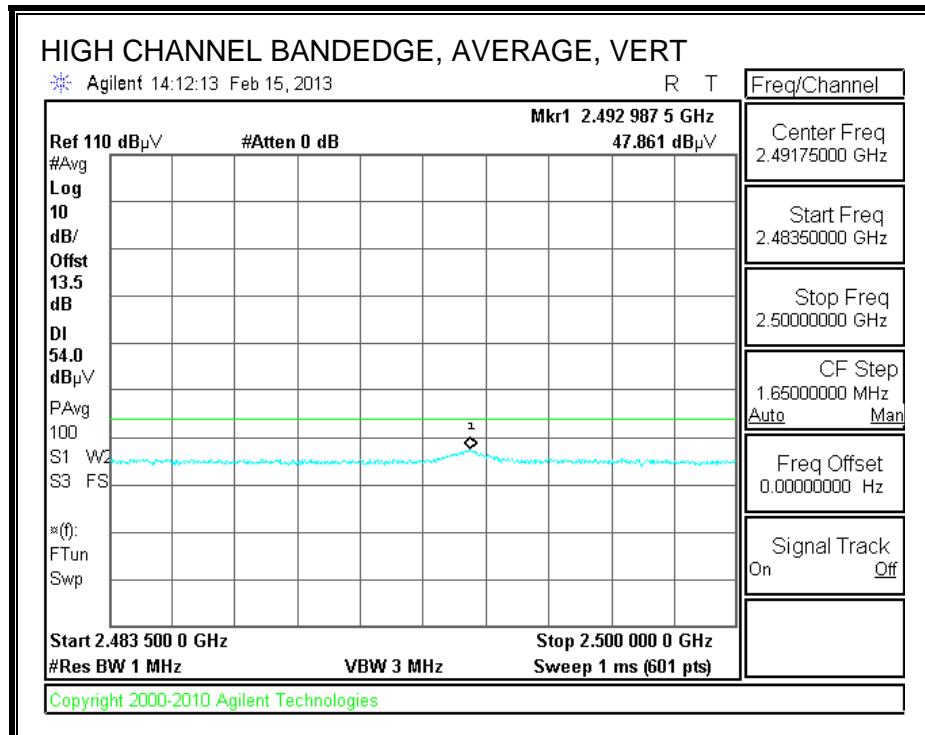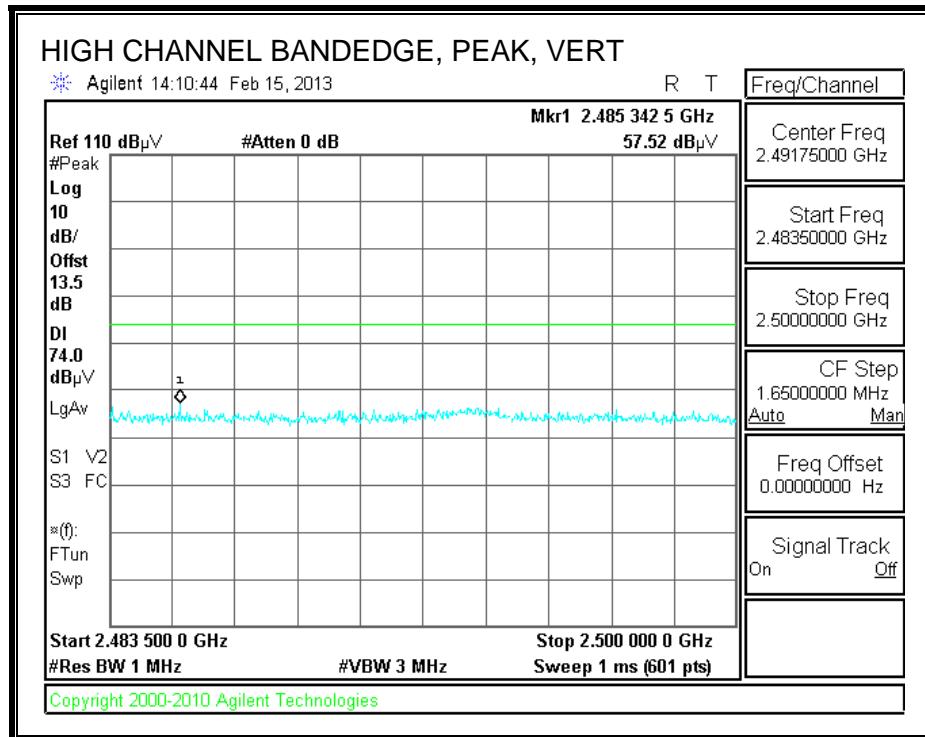

HARMONICS AND SPURIOUS EMISSIONS**High Frequency Measurement**
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Oliver Su
 Date: 02/18/13
 Project #: 12U14745
 Company: Apple
 Test Target:
 Mode Oper: 11b 3Tx Power= 24 dBm per Chain

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |


| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|------------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| Low Ch 2412MHz | | | | | | | | | | | | | |
| 4.824 | 3.0 | 39.6 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 45.5 | 74.0 | -28.6 | H | P | |
| 4.824 | 3.0 | 35.5 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 41.3 | 54.0 | -12.7 | H | A | |
| 12.060 | 3.0 | 33.3 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 52.1 | 74.0 | -21.9 | H | P | |
| 12.060 | 3.0 | 23.0 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 41.8 | 54.0 | -12.2 | H | A | |
| 4.824 | 3.0 | 38.1 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 43.9 | 74.0 | -30.1 | V | P | |
| 4.824 | 3.0 | 31.9 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 37.7 | 54.0 | -16.3 | V | A | |
| 12.060 | 3.0 | 33.0 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 51.8 | 74.0 | -22.2 | V | P | |
| 12.060 | 3.0 | 22.6 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 41.5 | 54.0 | -12.5 | V | A | |
| Mid Ch 2437MHz | | | | | | | | | | | | | |
| 4.874 | 3.0 | 40.6 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 46.5 | 74.0 | -27.5 | H | P | |
| 4.874 | 3.0 | 36.2 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 42.1 | 54.0 | -11.9 | H | A | |
| 7.311 | 3.0 | 34.7 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 46.5 | 74.0 | -27.5 | H | P | |
| 7.311 | 3.0 | 26.8 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 38.6 | 54.0 | -15.4 | H | A | |
| 4.874 | 3.0 | 36.1 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 42.0 | 74.0 | -32.0 | V | P | |
| 4.874 | 3.0 | 27.8 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 33.7 | 54.0 | -20.3 | V | A | |
| 7.311 | 3.0 | 34.4 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 46.2 | 74.0 | -27.8 | V | P | |
| 7.311 | 3.0 | 23.6 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 35.4 | 54.0 | -18.6 | V | A | |
| High ch 2462MHz | | | | | | | | | | | | | |
| 4.924 | 3.0 | 35.4 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 41.4 | 74.0 | -32.6 | V | P | |
| 4.924 | 3.0 | 25.2 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 31.2 | 54.0 | -22.8 | V | A | |
| 7.386 | 3.0 | 34.2 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 46.2 | 74.0 | -27.8 | V | P | |
| 7.386 | 3.0 | 23.8 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 35.8 | 54.0 | -18.2 | V | A | |
| 4.924 | 3.0 | 40.7 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 46.7 | 74.0 | -27.3 | H | P | |
| 4.924 | 3.0 | 36.4 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 42.4 | 54.0 | -11.6 | H | A | |
| 7.386 | 3.0 | 34.4 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 46.4 | 74.0 | -27.6 | H | P | |
| 7.386 | 3.0 | 26.6 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 38.5 | 54.0 | -15.5 | H | A | |


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.5. TX ABOVE 1 GHz 802.11g 1TX MODE IN THE 2.4 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL) CH1


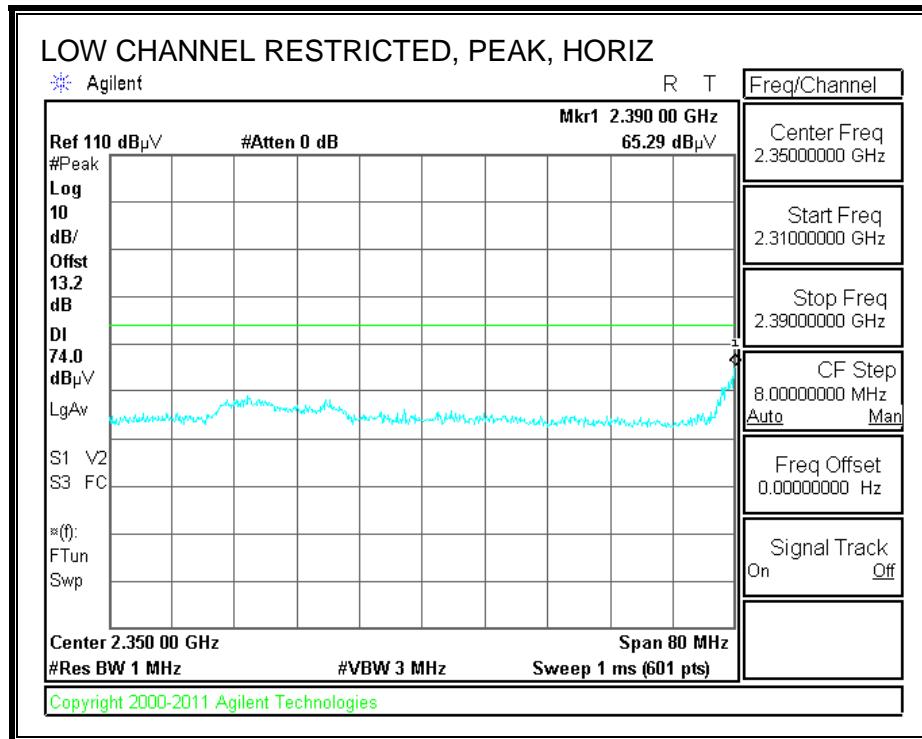


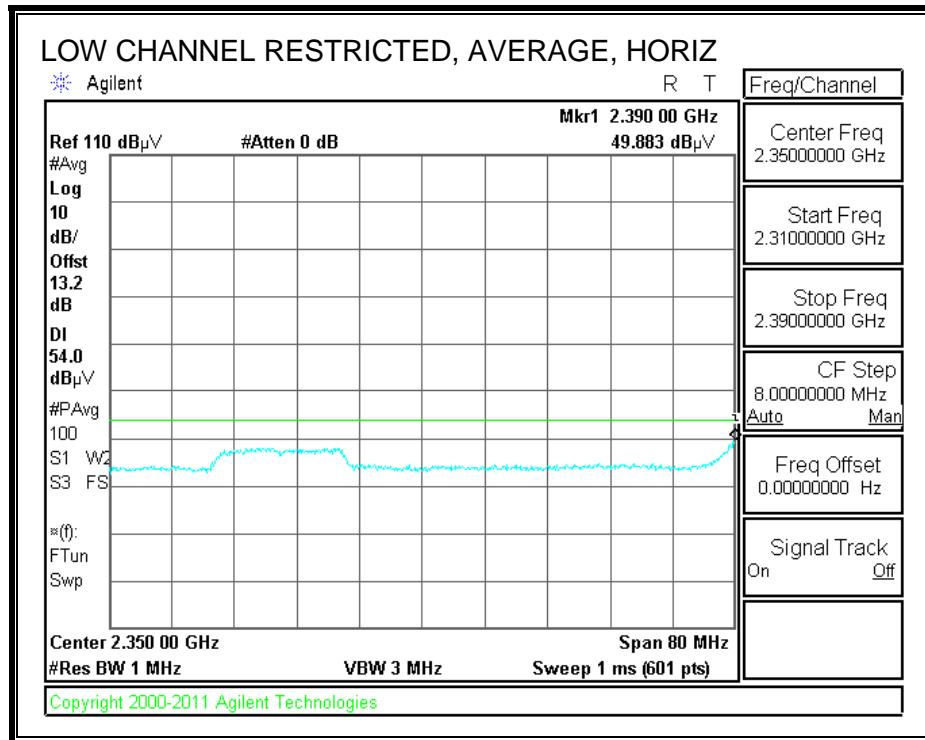

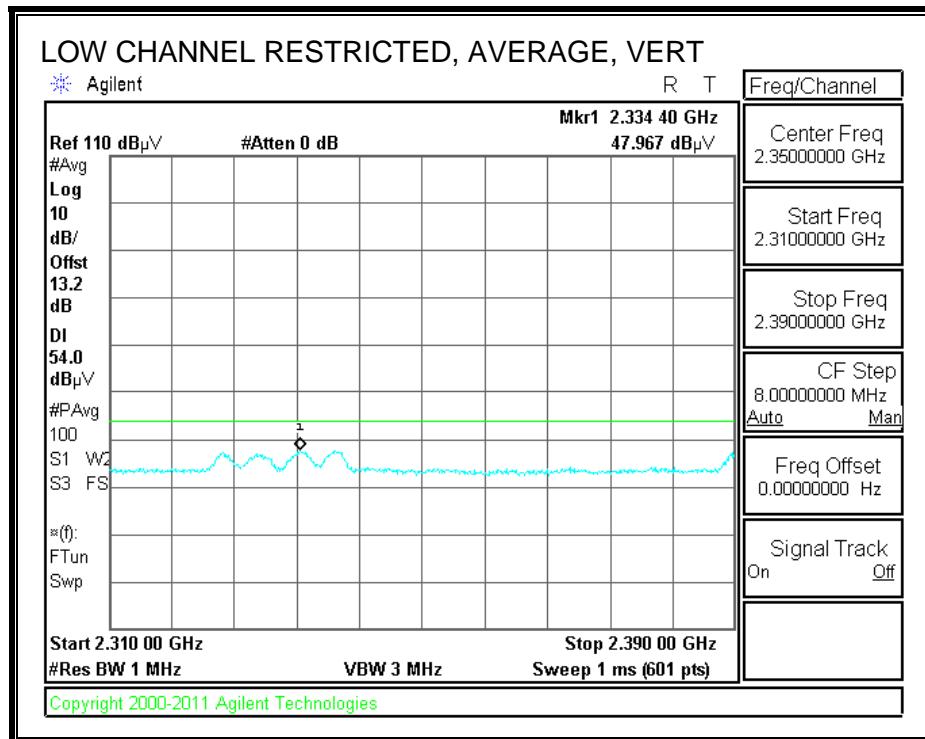
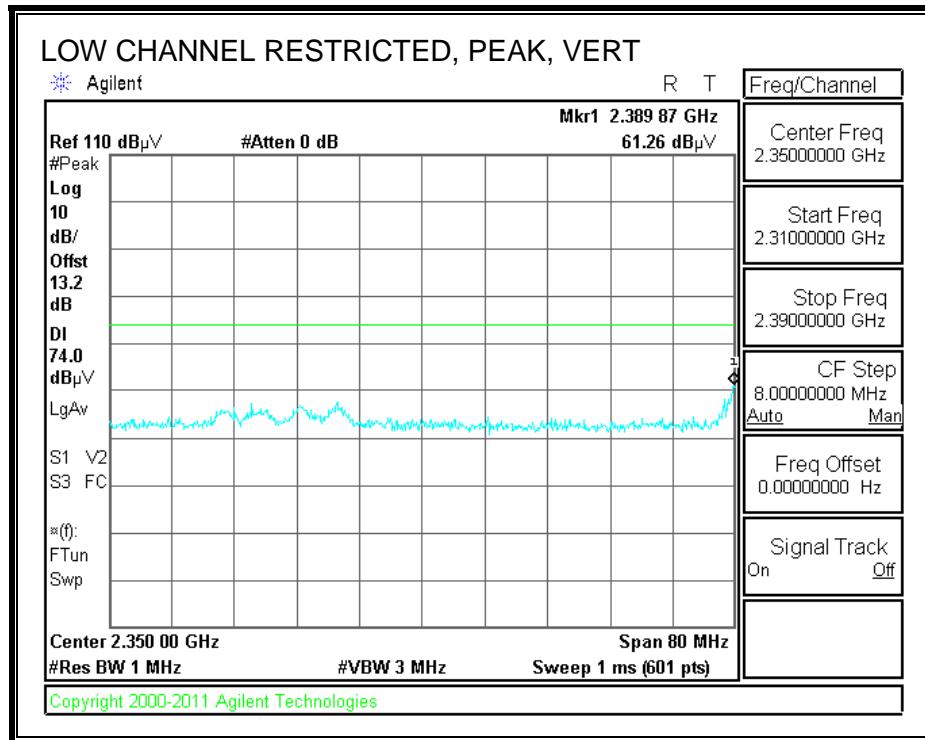




RESTRICTED BANDEDGE (LOW CHANNEL) CH2

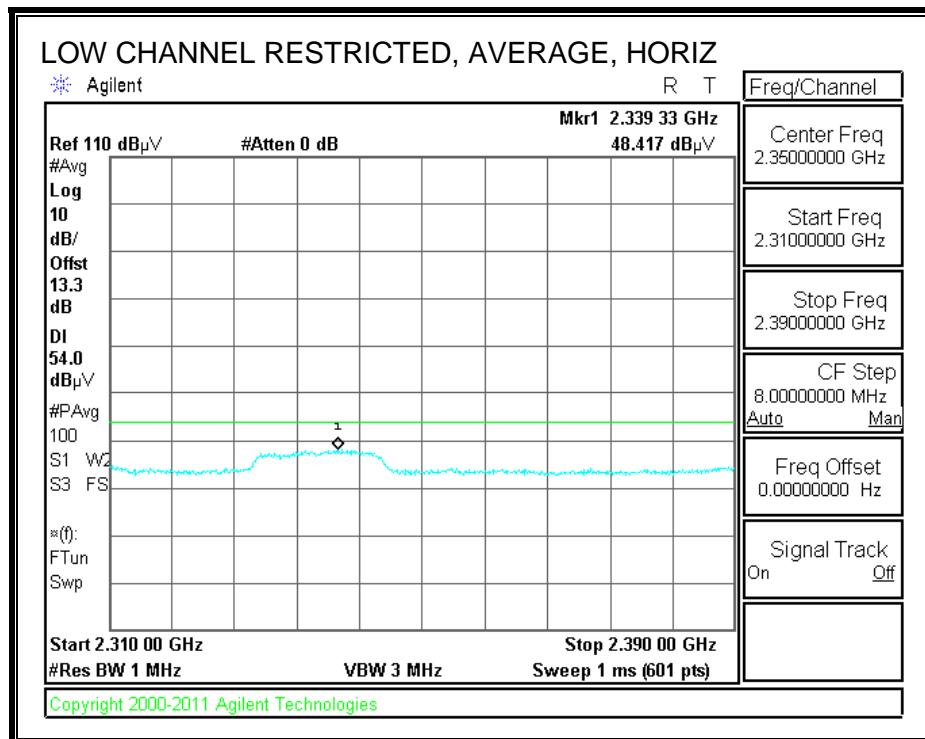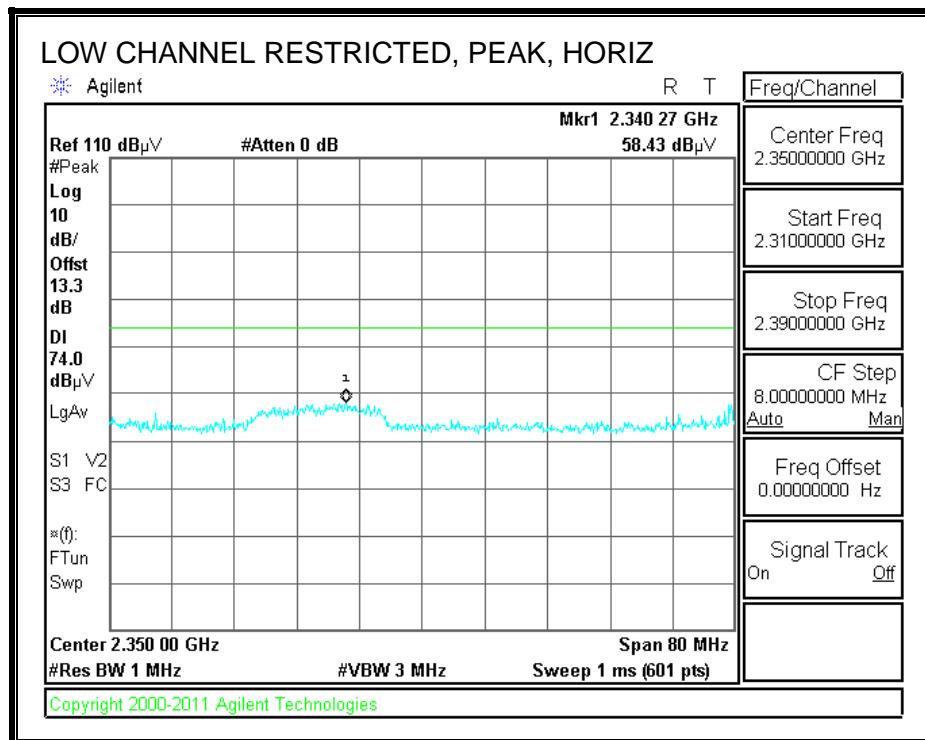

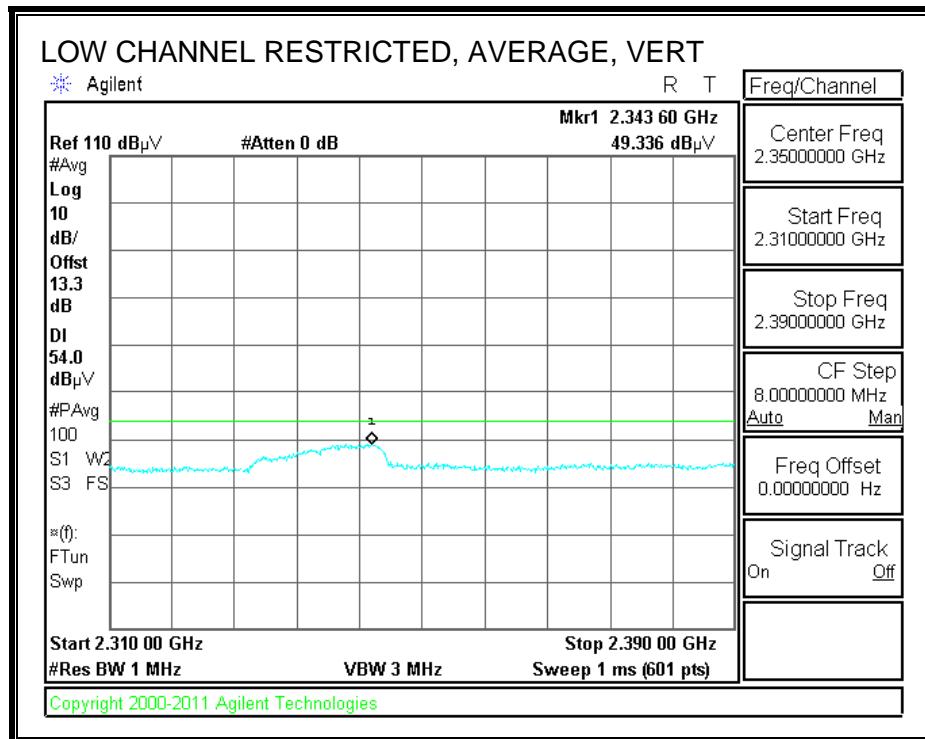
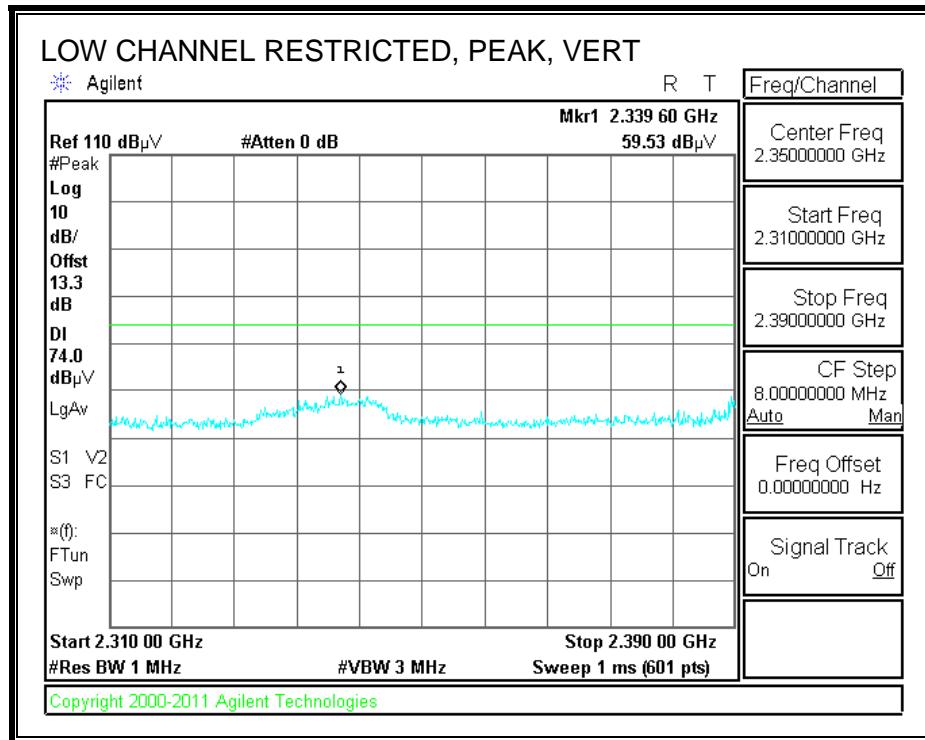




AUTHORIZED BANDEDGE (HIGH CHANNEL) CH10

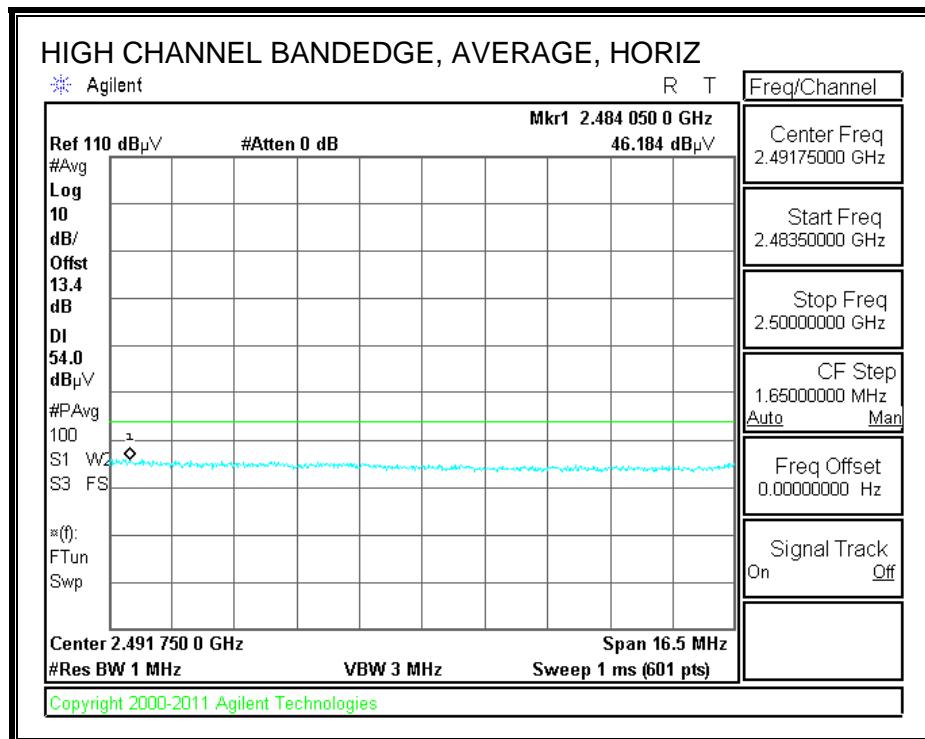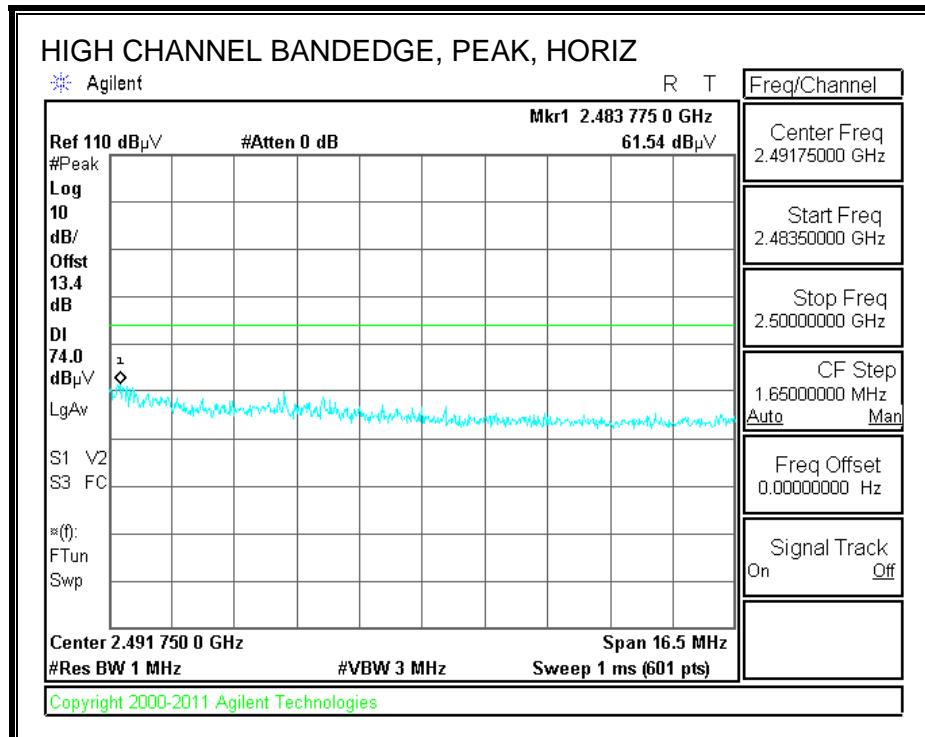

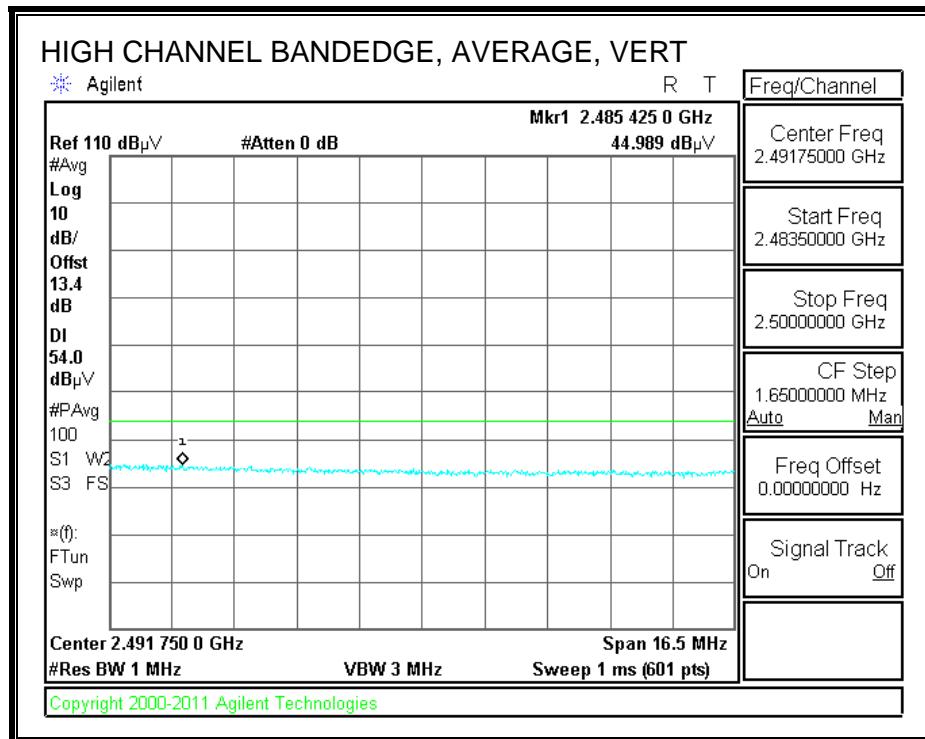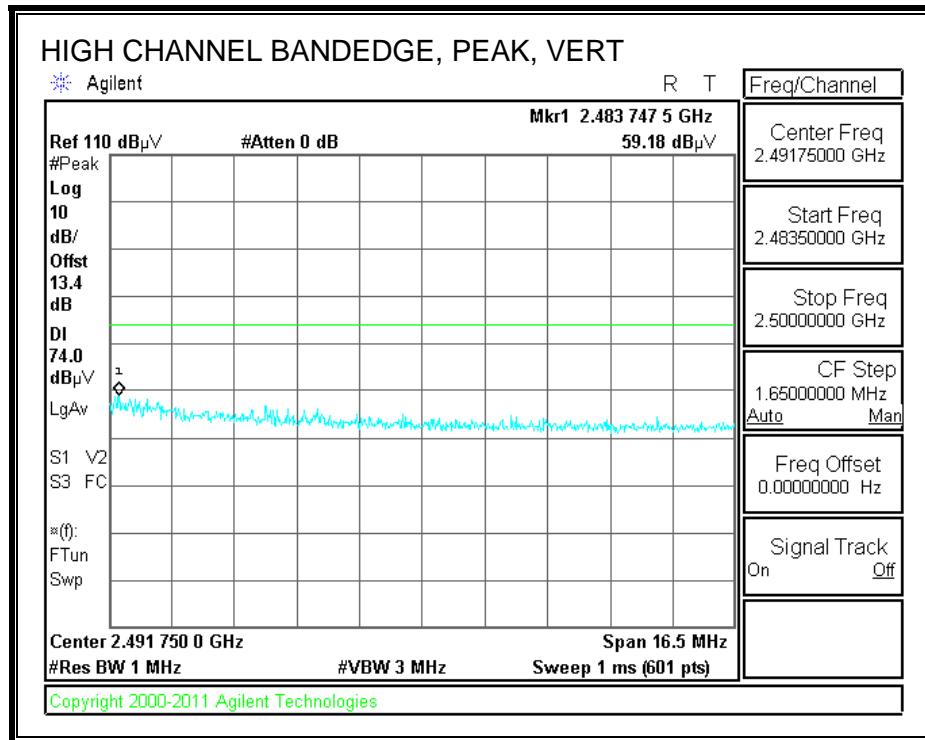

AUTHORIZED BANDEDGE (HIGH CHANNEL) CH11

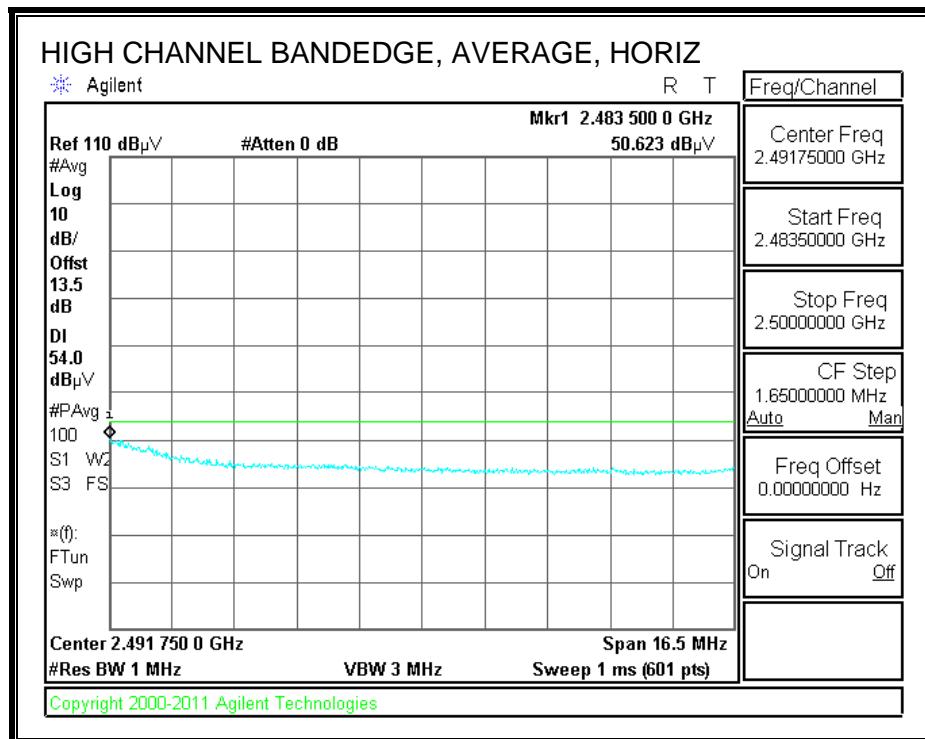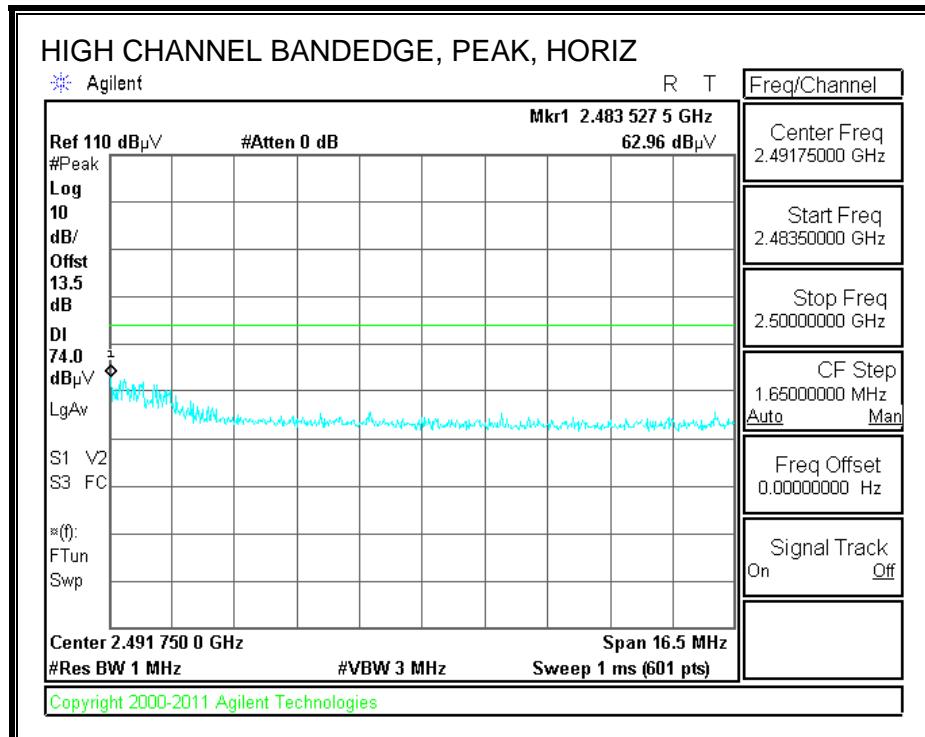

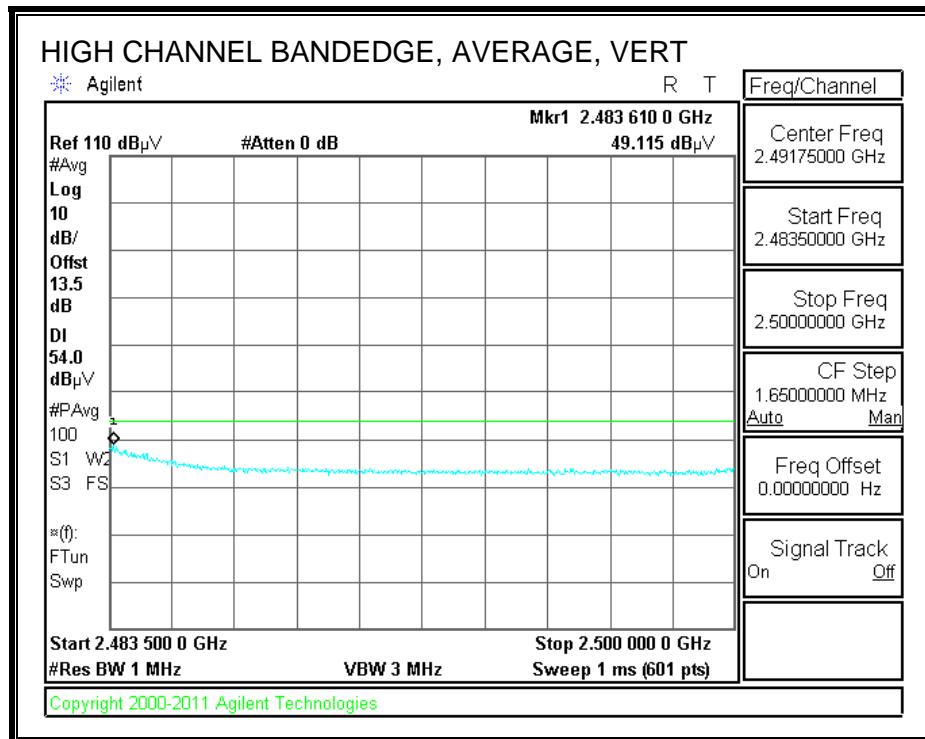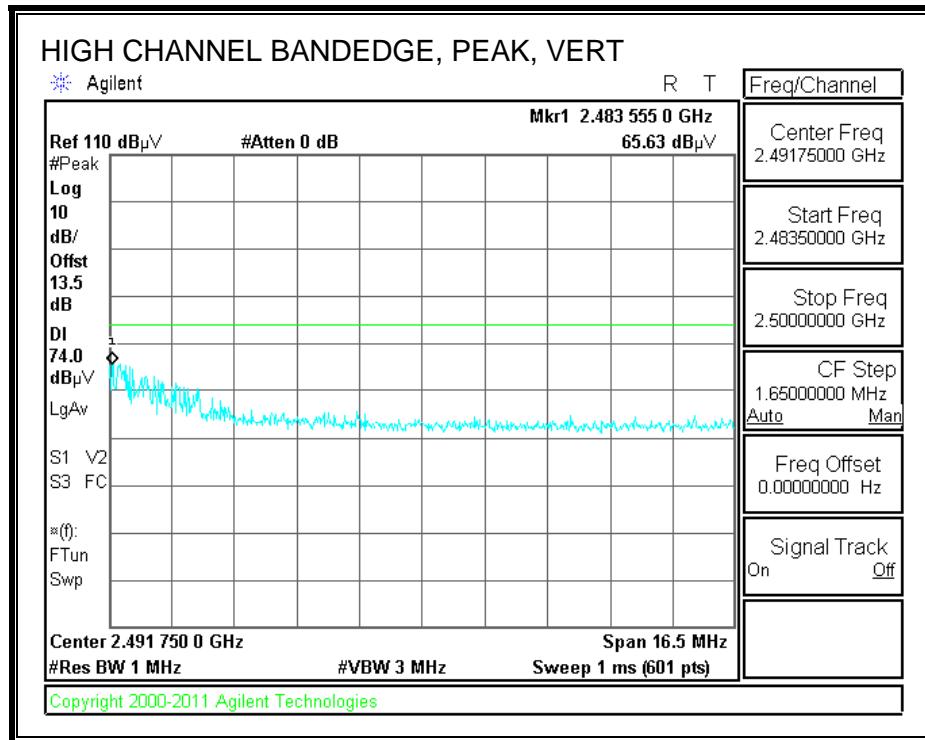

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 02/19/13
Project #: 12U14745
Company: Apple
Test Target: FCC Class B
Mode Oper: 11g SISO TX mode

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |

| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|-------------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| 2412MHz 11g SISO | | | | | | | | | | | | | |
| 4.824 | 3.0 | 36.7 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 42.5 | 74.0 | -31.5 | H | P | |
| 4.824 | 3.0 | 25.5 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 31.3 | 54.0 | -22.7 | H | A | |
| 4.824 | 3.0 | 35.0 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 40.8 | 74.0 | -33.2 | V | P | |
| 4.824 | 3.0 | 25.7 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 31.5 | 54.0 | -22.5 | V | A | |
| 2437MHz 11g SISO | | | | | | | | | | | | | |
| 4.874 | 3.0 | 35.4 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 41.3 | 74.0 | -32.7 | H | P | |
| 4.874 | 3.0 | 25.4 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 31.4 | 54.0 | -22.6 | H | A | |
| 4.874 | 3.0 | 35.2 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 41.1 | 74.0 | -32.9 | V | P | |
| 4.874 | 3.0 | 25.1 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 31.0 | 54.0 | -23.0 | V | A | |
| 2462MHz 11g SISO | | | | | | | | | | | | | |
| 4.924 | 3.0 | 35.8 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 41.8 | 74.0 | -32.2 | V | P | |
| 4.924 | 3.0 | 22.7 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 28.7 | 54.0 | -25.3 | V | A | |
| 4.924 | 3.0 | 36.1 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 42.1 | 74.0 | -31.9 | H | P | |
| 4.924 | 3.0 | 25.1 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 31.1 | 54.0 | -22.9 | H | A | |

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

9.6. TX ABOVE 1 GHz 802.11g 2TX MODE IN THE 2.4 GHz BAND

Covered by testing 11n HT20 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

9.7. TX ABOVE 1 GHz 802.11g 3TX MODE IN THE 2.4 GHz BAND


Covered by testing 11n HT20 CCD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.


9.8. TX ABOVE 1 GHz 802.11n HT20 1TX MODE IN THE 2.4 GHz BAND



Covered by testing 11n HT20 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

9.9. TX ABOVE 1 GHz 802.11n HT20 2TX MODE IN THE 2.4 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL) CH1


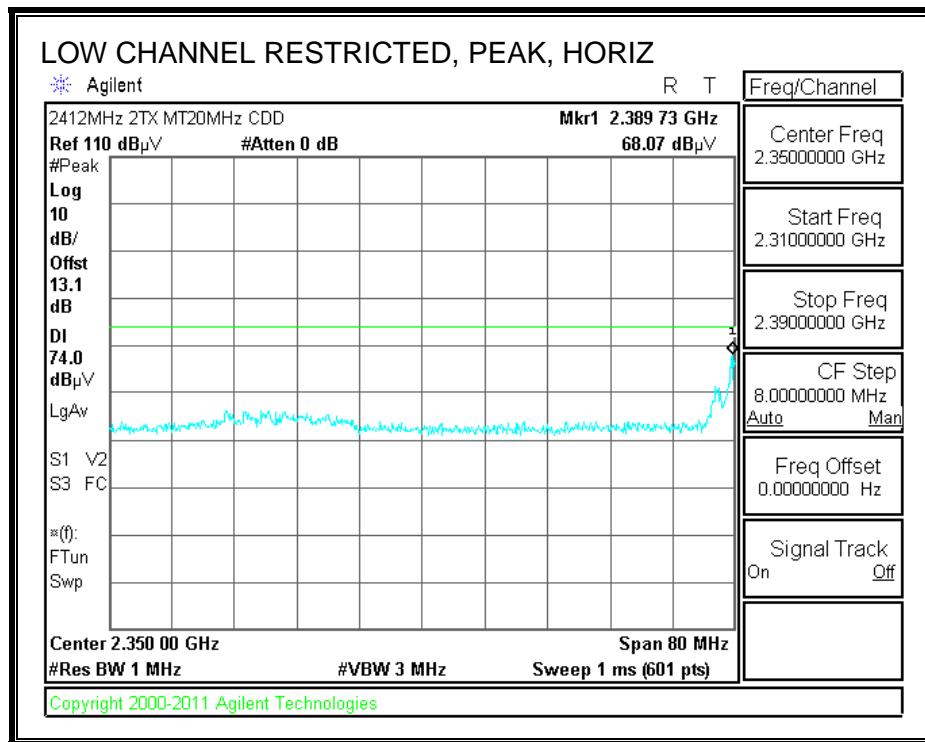


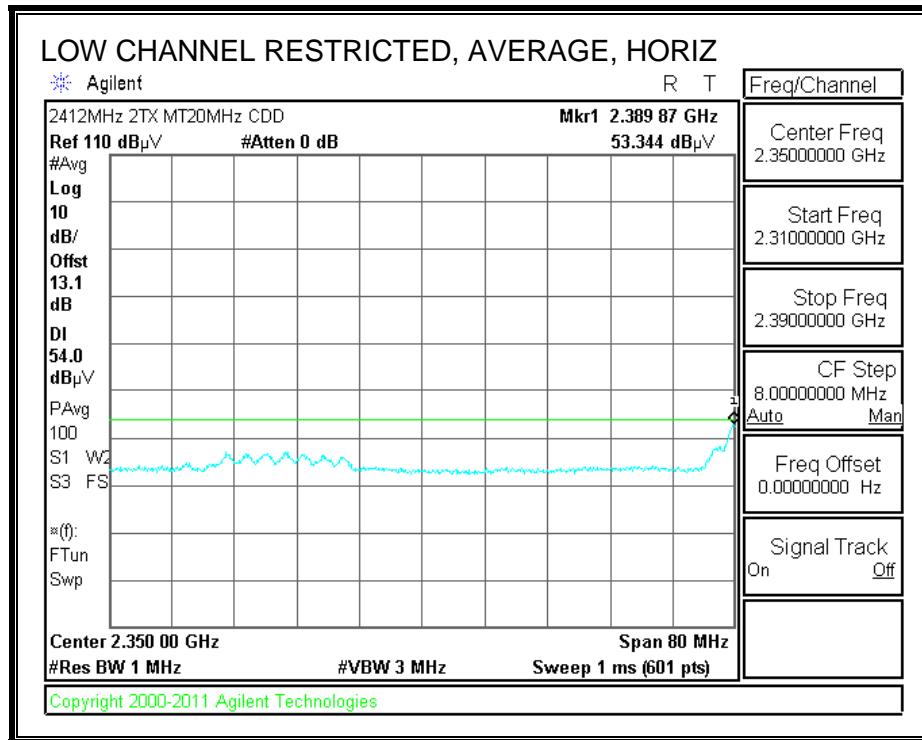

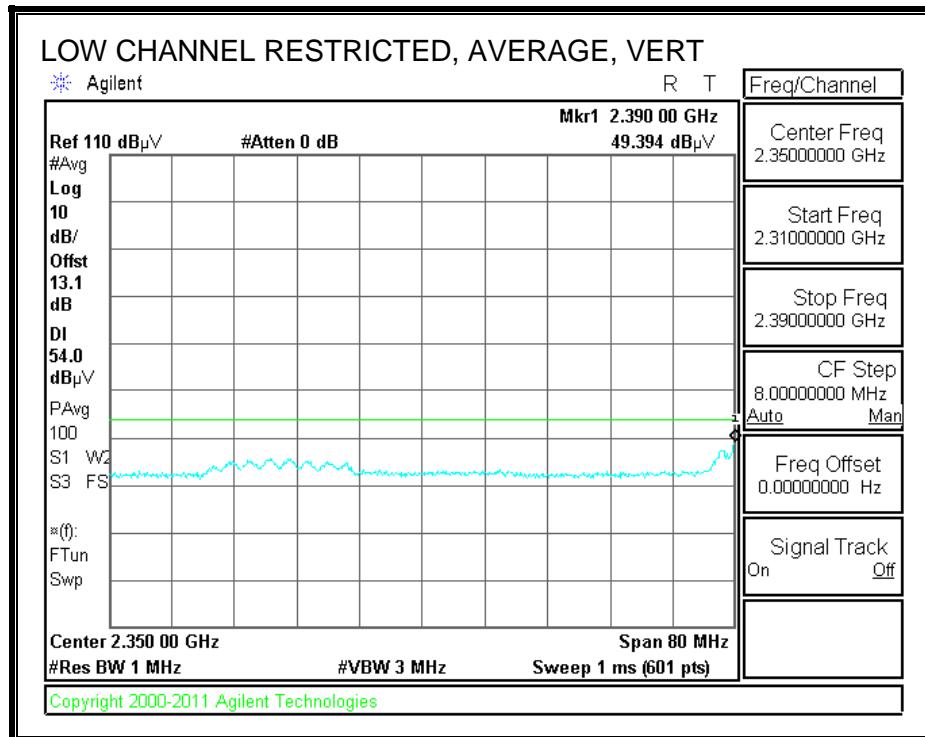
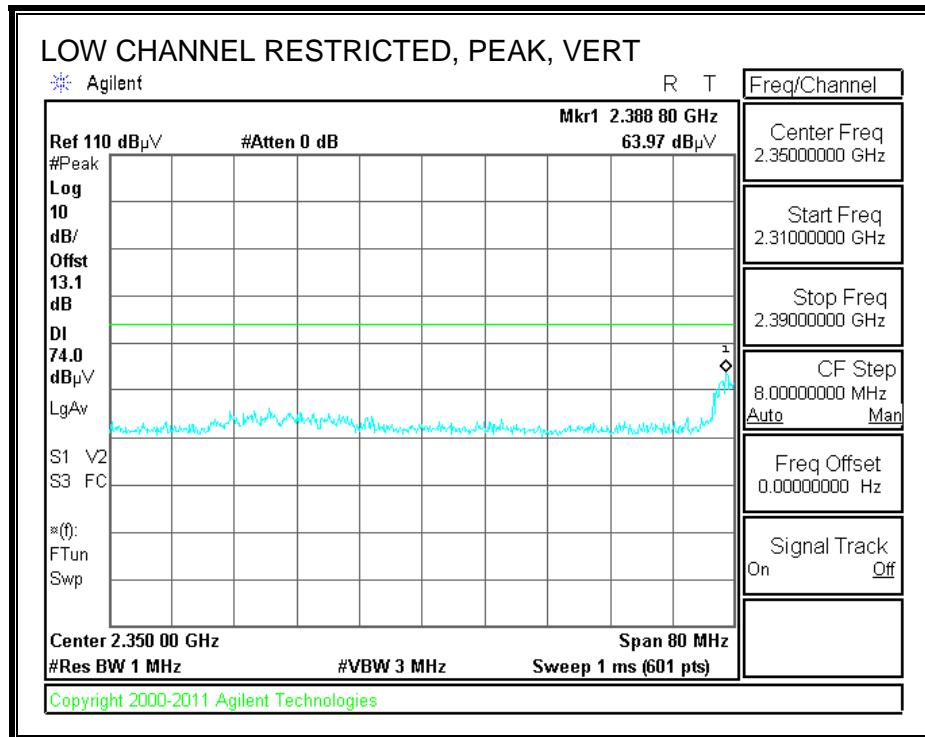




RESTRICTED BANDEDGE (LOW CHANNEL) CH2

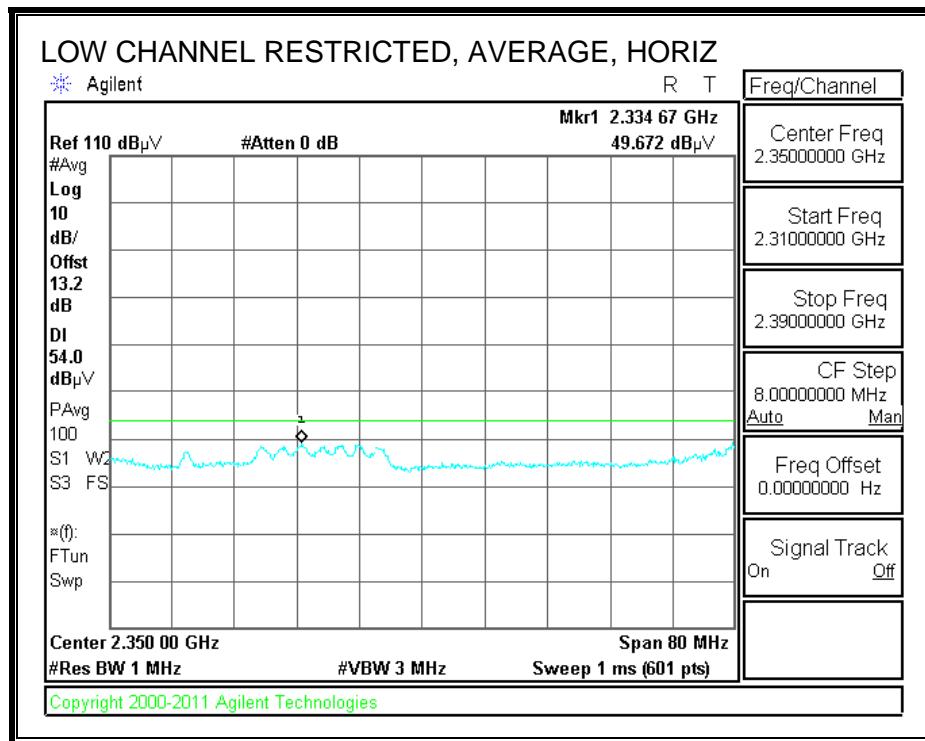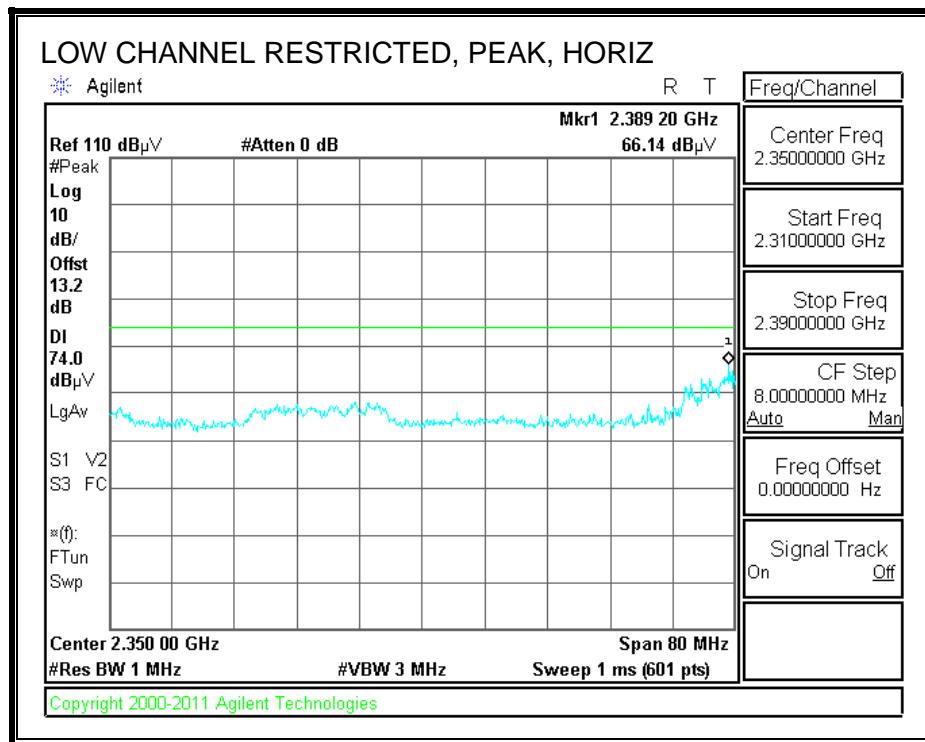

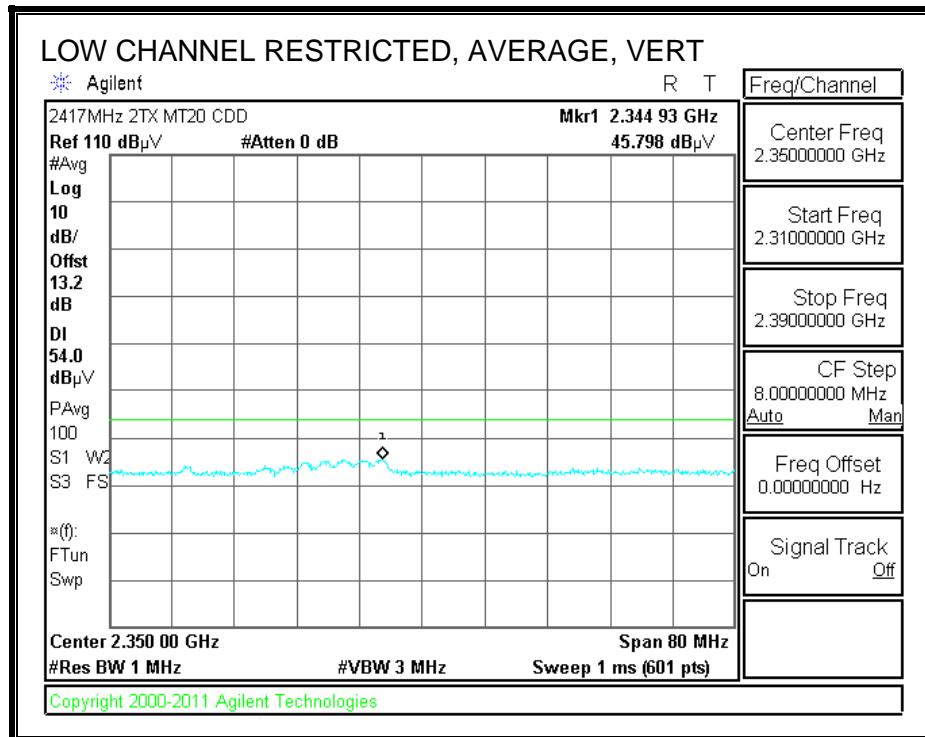
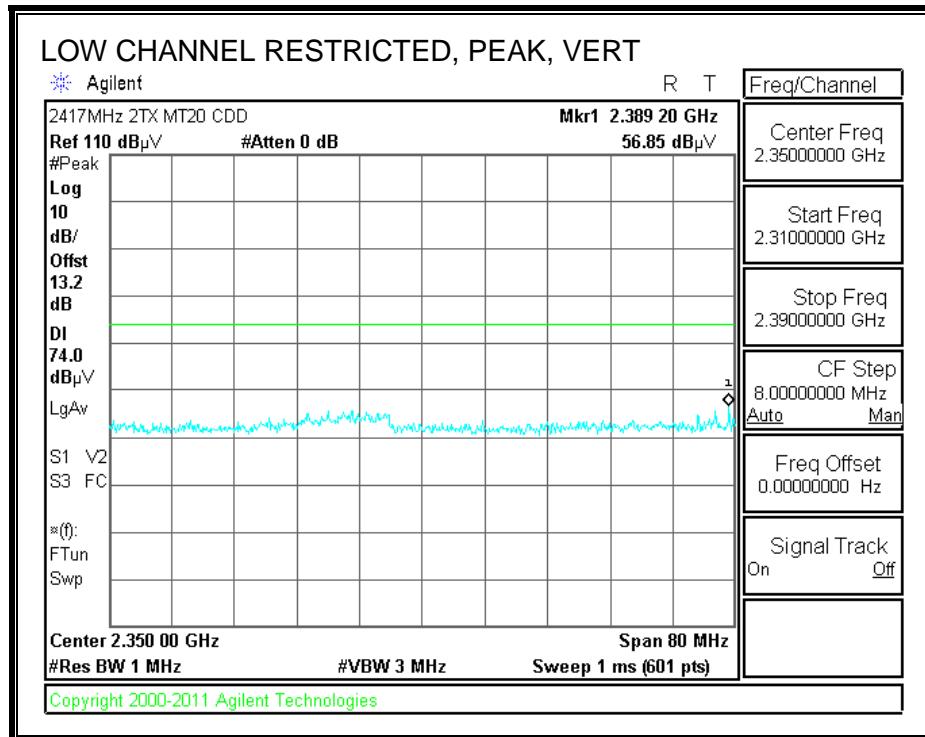




AUTHORIZED BANDEDGE (HIGH CHANNEL) CH10

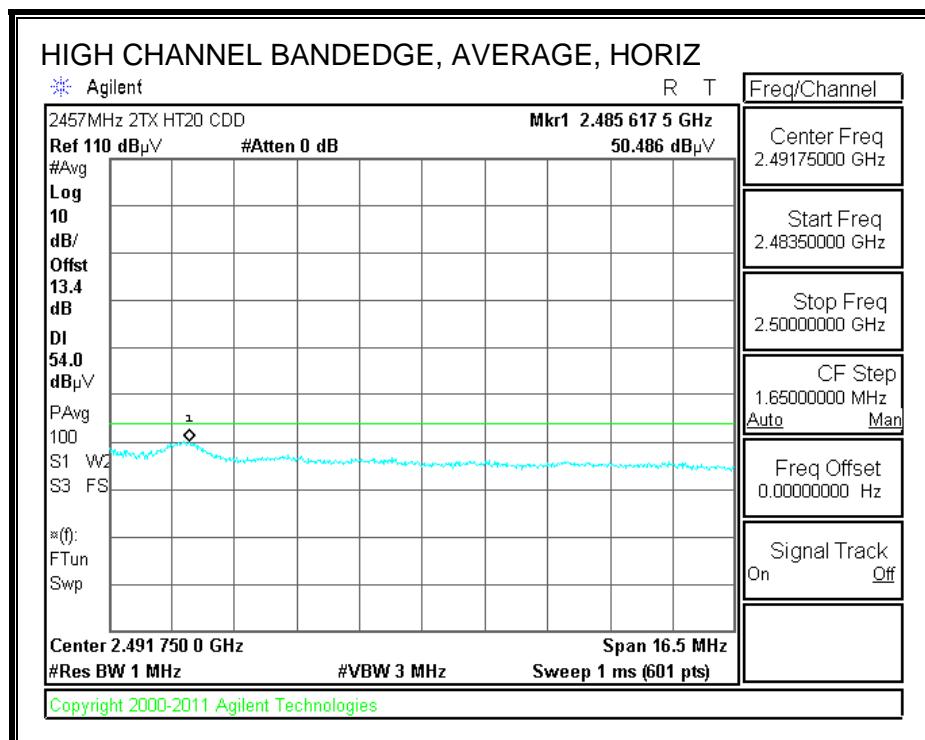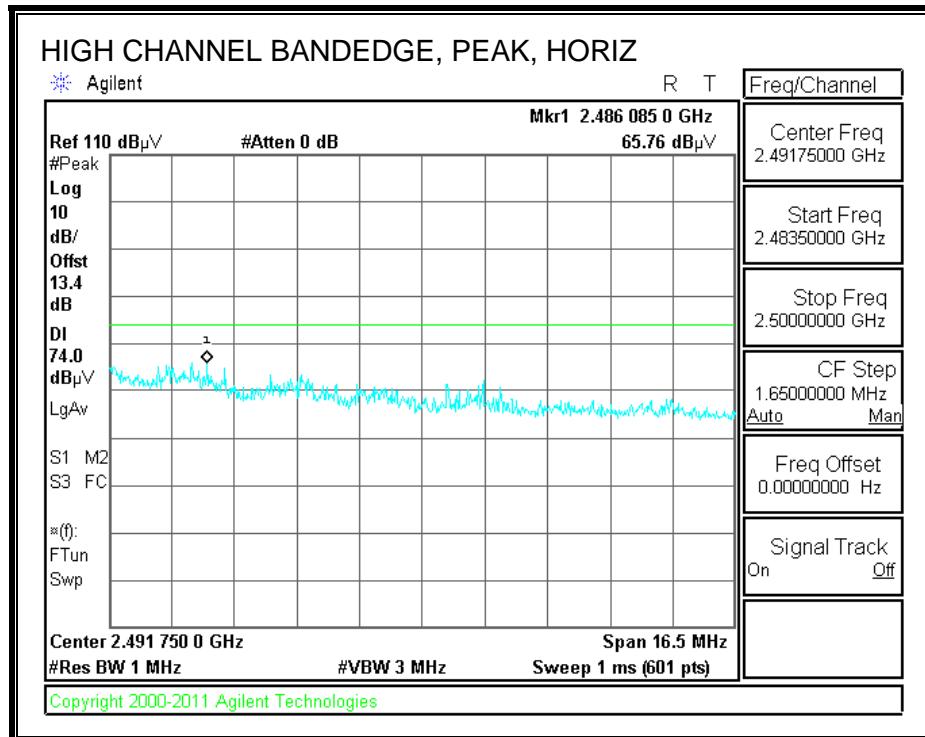

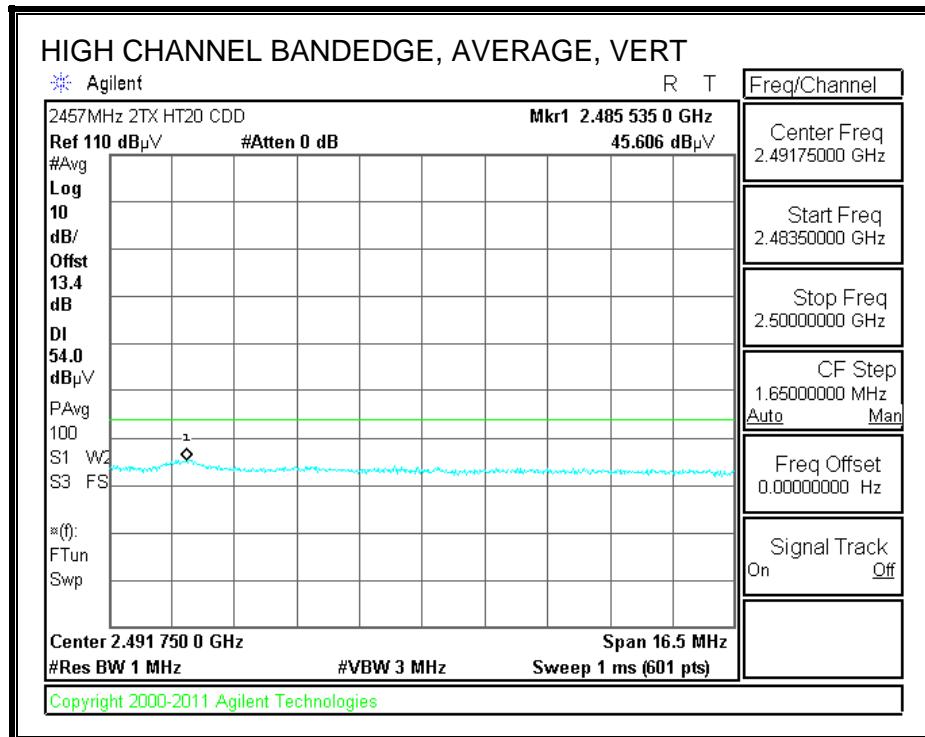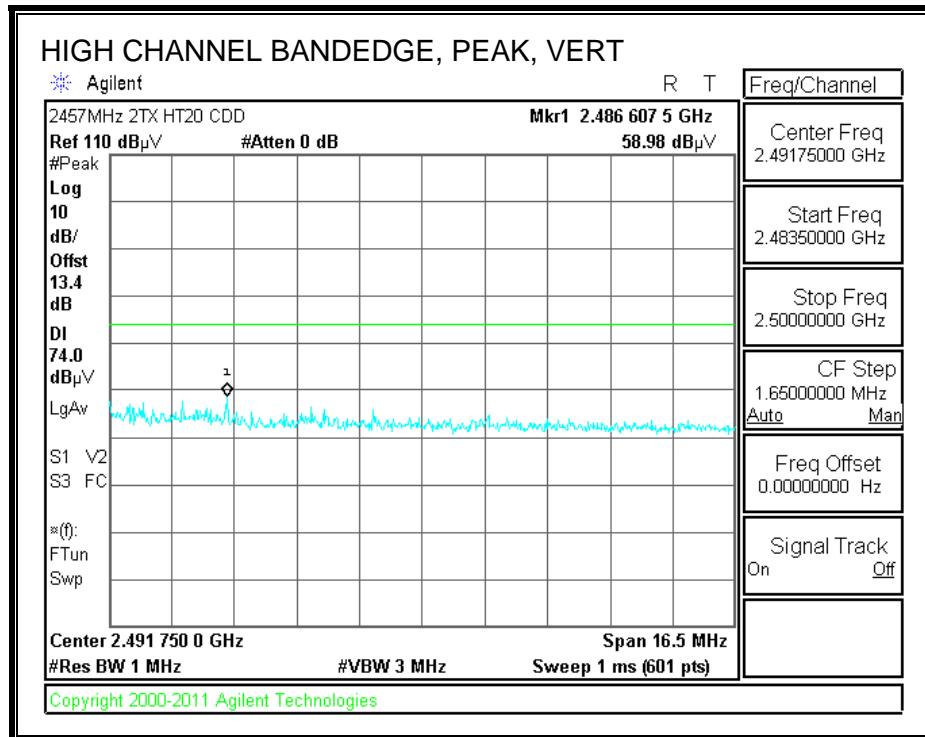

AUTHORIZED BANDEDGE (HIGH CHANNEL) CH11

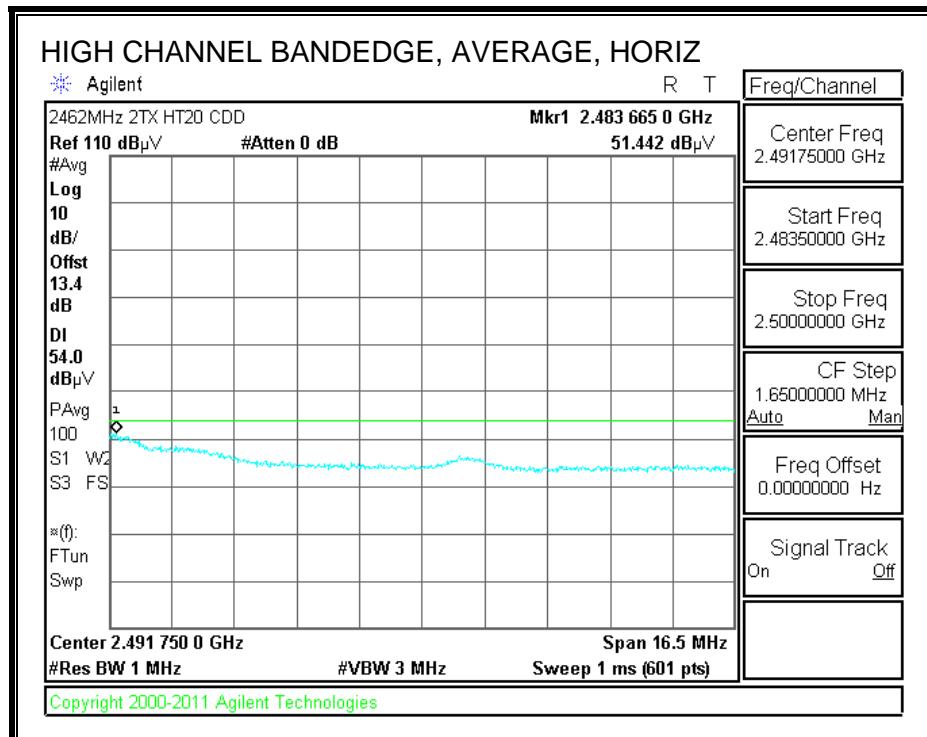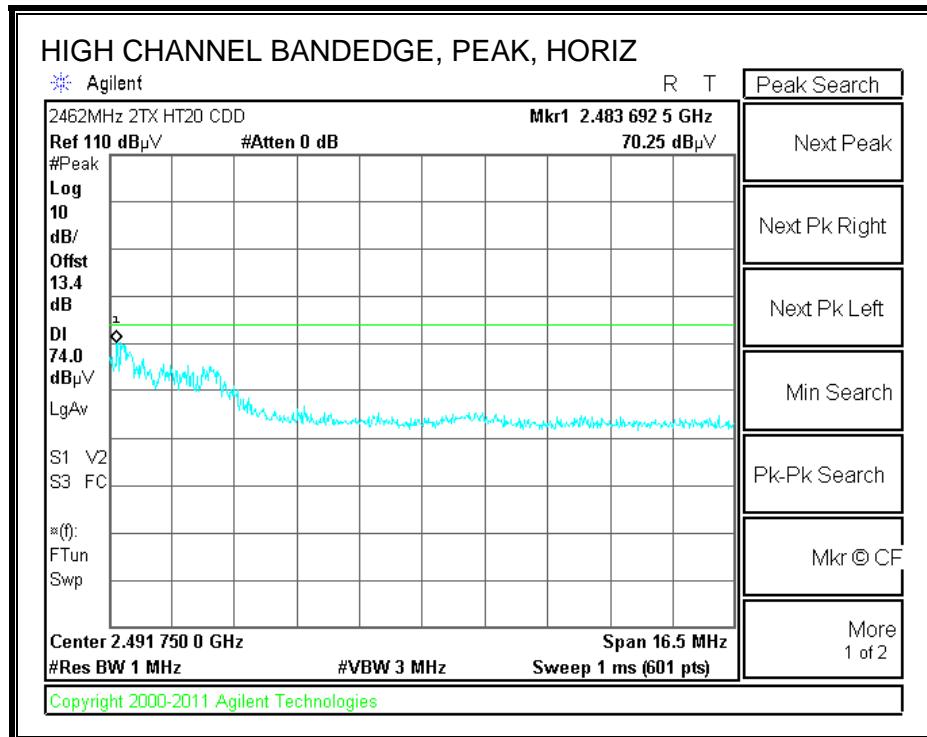

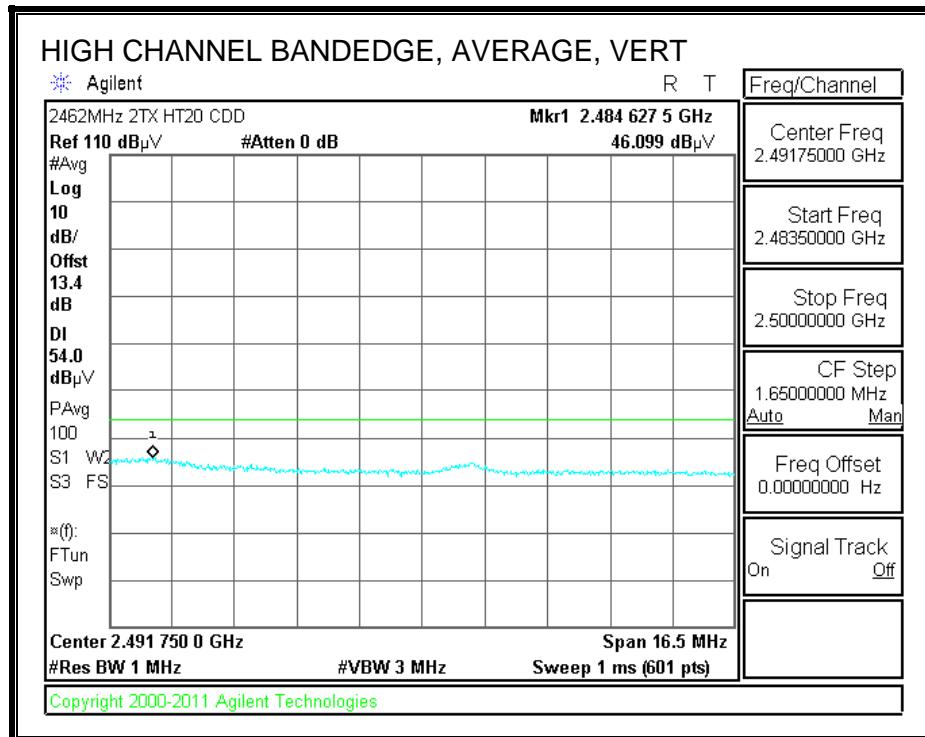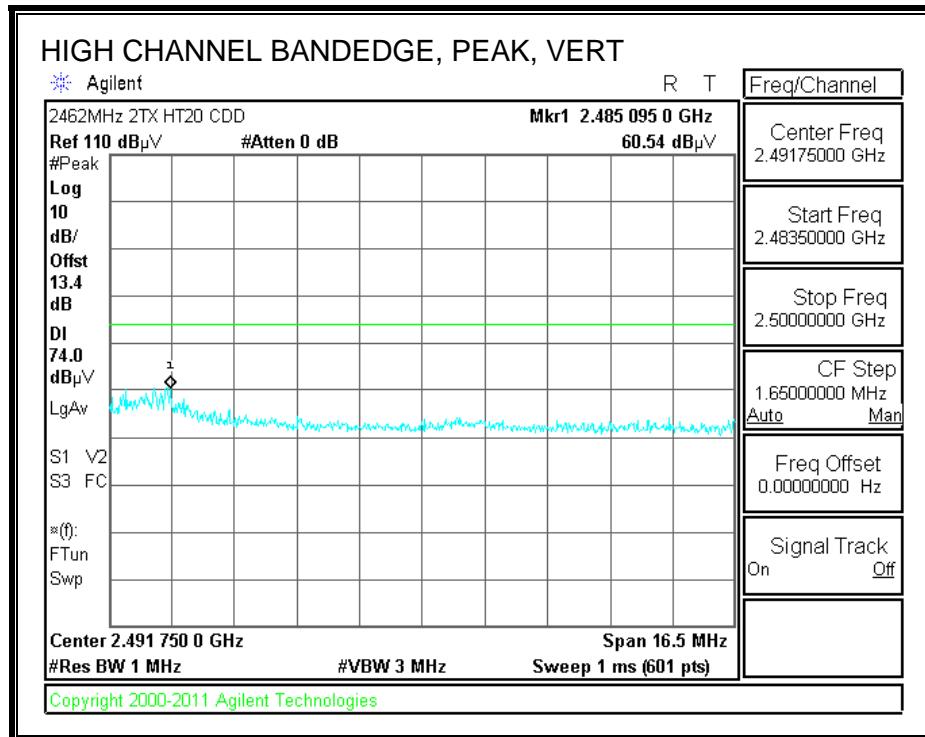

HARMONICS AND SPURIOUS EMISSIONS**High Frequency Measurement**
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Oliver Su
 Date: 02/18/13
 Project #: 12U14745
 Company: Apple
 Test Target:
 Mode Oper: 11n 3Tx HT20 Power= 23 dBm per each chain

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |


| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|------------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| Low Ch 2412MHz | | | | | | | | | | | | | |
| 4.824 | 3.0 | 40.3 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 46.1 | 74.0 | -27.9 | H | P | |
| 4.824 | 3.0 | 26.7 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 32.5 | 54.0 | -21.5 | H | A | |
| 12.060 | 3.0 | 33.3 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 52.1 | 74.0 | -21.9 | H | P | |
| 12.060 | 3.0 | 22.9 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 41.7 | 54.0 | -12.3 | H | A | |
| 4.824 | 3.0 | 36.1 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 41.9 | 74.0 | -32.1 | V | P | |
| 4.824 | 3.0 | 25.4 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 31.2 | 54.0 | -22.8 | V | A | |
| 12.060 | 3.0 | 33.7 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 52.5 | 74.0 | -21.5 | V | P | |
| 12.060 | 3.0 | 23.0 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 41.8 | 54.0 | -12.2 | V | A | |
| Mid Ch 2437MHz | | | | | | | | | | | | | |
| 4.874 | 3.0 | 38.7 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 44.6 | 74.0 | -29.4 | H | P | |
| 4.874 | 3.0 | 26.3 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 32.2 | 54.0 | -21.8 | H | A | |
| 7.311 | 3.0 | 34.9 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 46.7 | 74.0 | -27.3 | H | P | |
| 7.311 | 3.0 | 27.5 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 39.3 | 54.0 | -14.7 | H | A | |
| 4.874 | 3.0 | 35.5 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 41.4 | 74.0 | -32.6 | V | P | |
| 4.874 | 3.0 | 25.0 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 30.9 | 54.0 | -23.1 | V | A | |
| 7.311 | 3.0 | 35.1 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 46.9 | 74.0 | -27.1 | V | P | |
| 7.311 | 3.0 | 23.7 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 35.5 | 54.0 | -18.5 | V | A | |
| High Ch 2462MHz | | | | | | | | | | | | | |
| 4.924 | 3.0 | 36.2 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 42.2 | 74.0 | -31.8 | H | P | |
| 4.924 | 3.0 | 26.1 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 32.1 | 54.0 | -21.9 | H | A | |
| 7.386 | 3.0 | 36.1 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 48.1 | 74.0 | -25.9 | H | P | |
| 7.386 | 3.0 | 28.8 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 40.8 | 54.0 | -13.2 | H | A | |
| 4.924 | 3.0 | 35.7 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 41.7 | 74.0 | -32.3 | V | P | |
| 4.924 | 3.0 | 25.3 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 31.3 | 54.0 | -22.7 | V | A | |
| 7.386 | 3.0 | 34.5 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 46.5 | 74.0 | -27.5 | V | P | |
| 7.386 | 3.0 | 24.0 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 36.0 | 54.0 | -18.0 | V | A | |


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.10. TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 2.4 GHz BAND



RESTRICTED BANDEdge (LOW CHANNEL) CH1


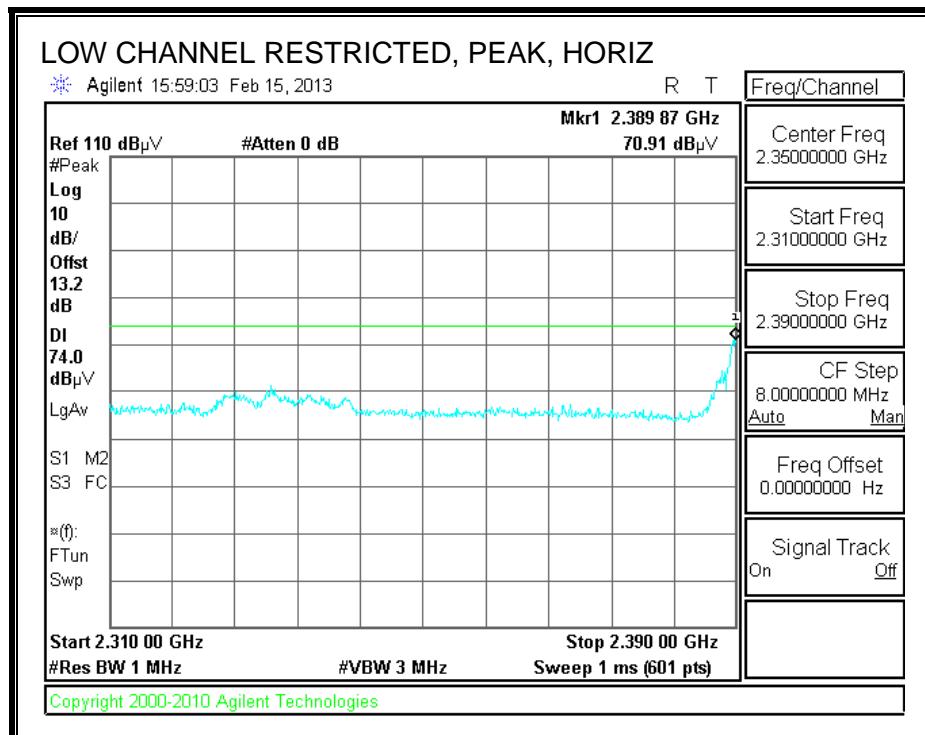


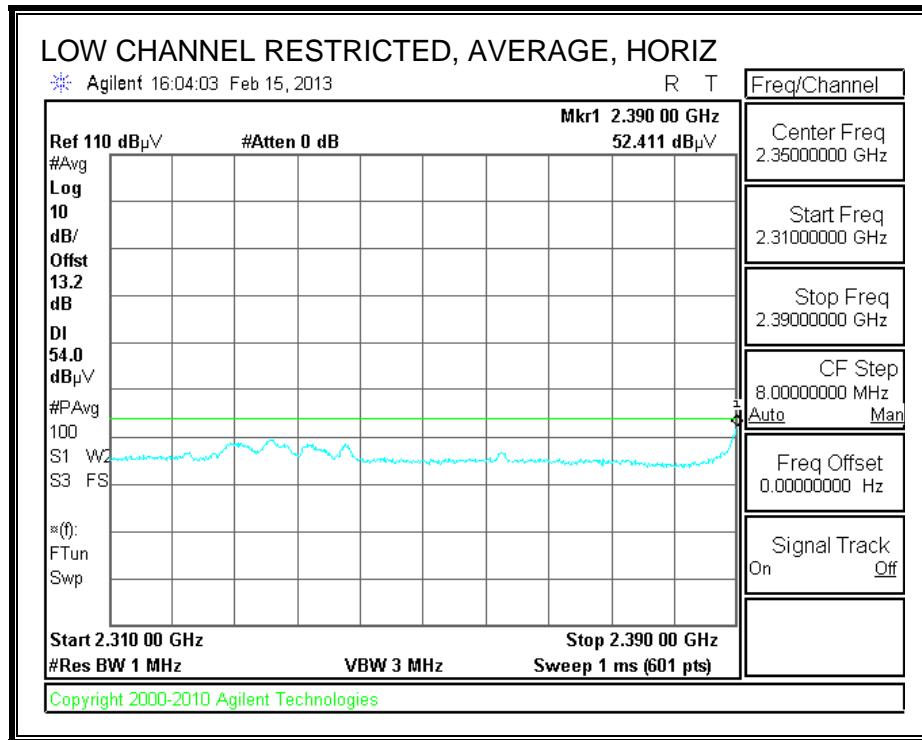

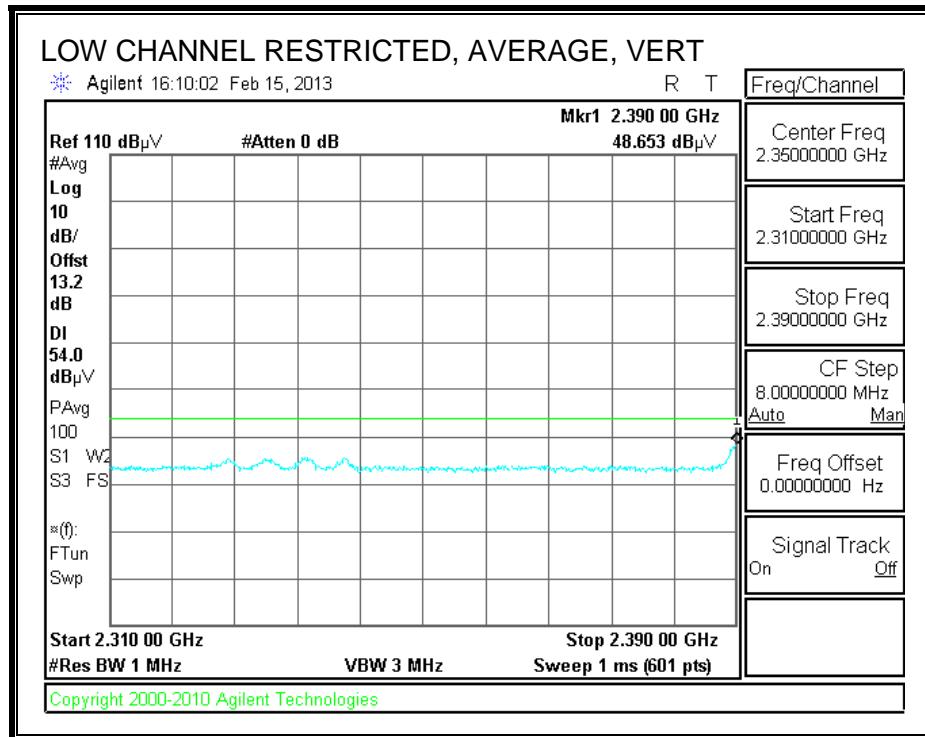
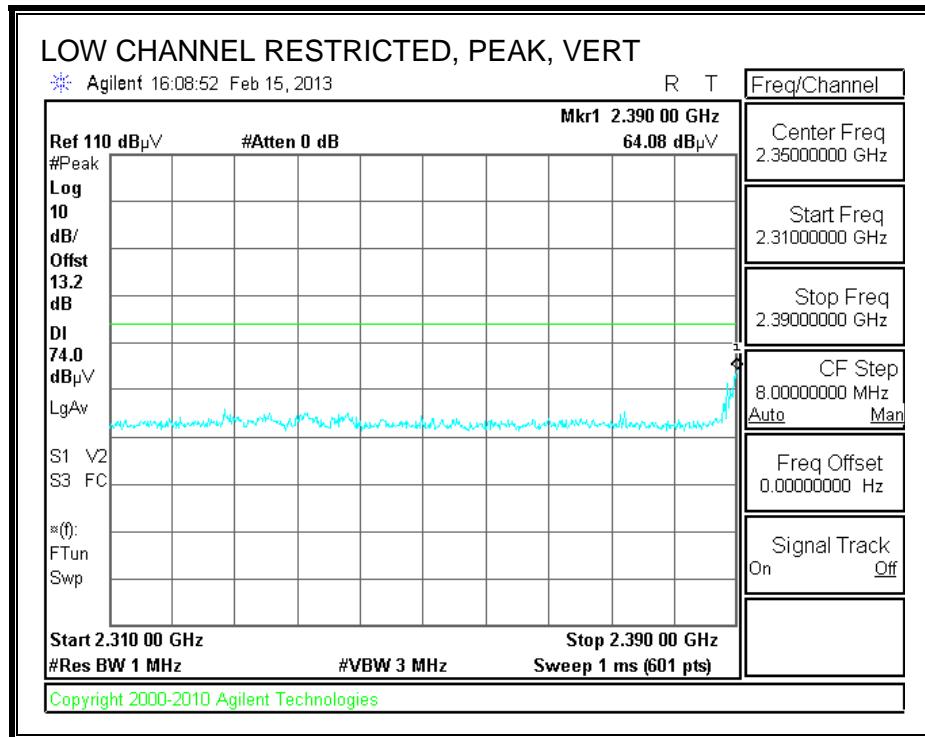




RESTRICTED BANDEDGE (LOW CHANNEL) CH2

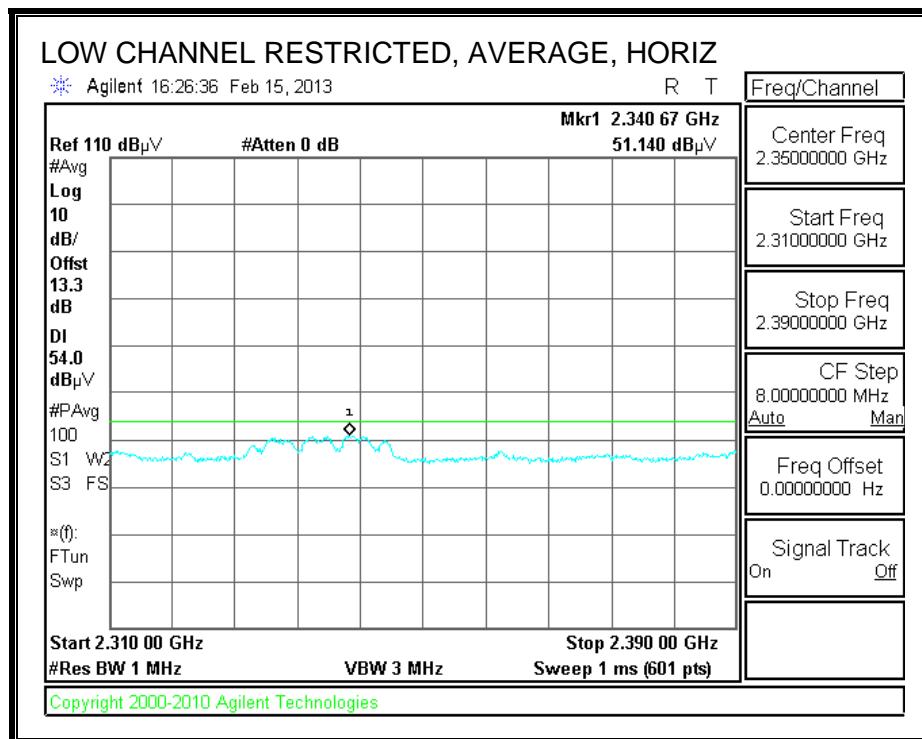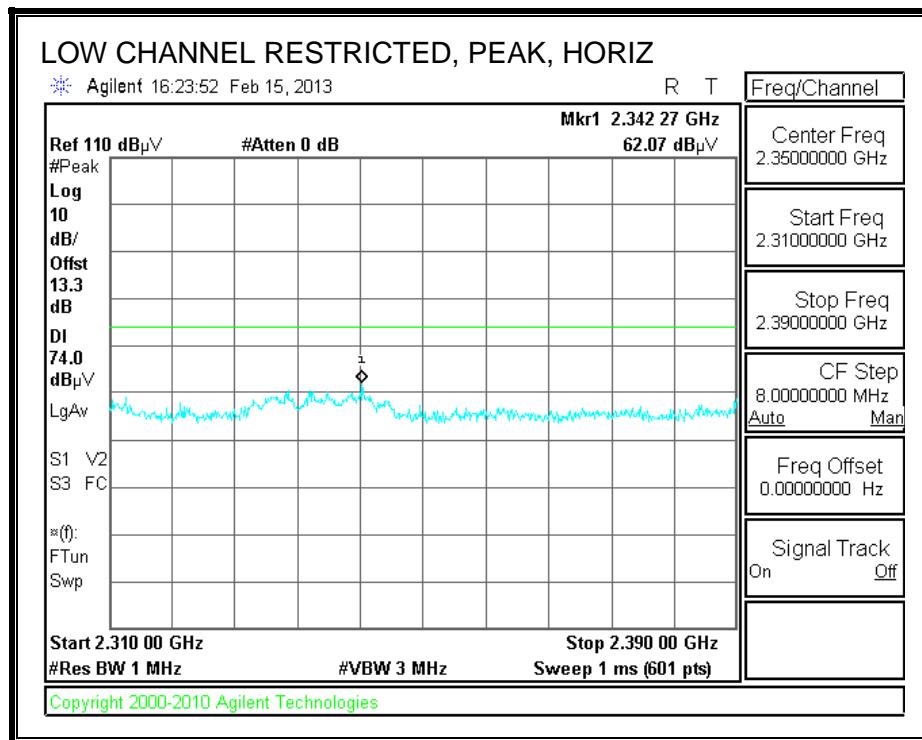

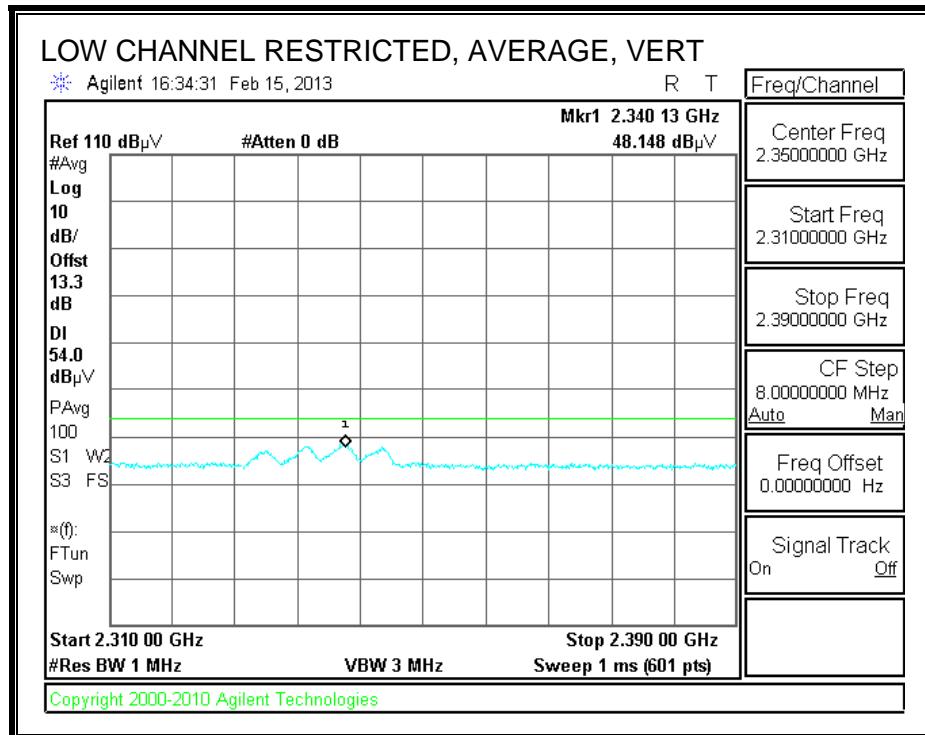
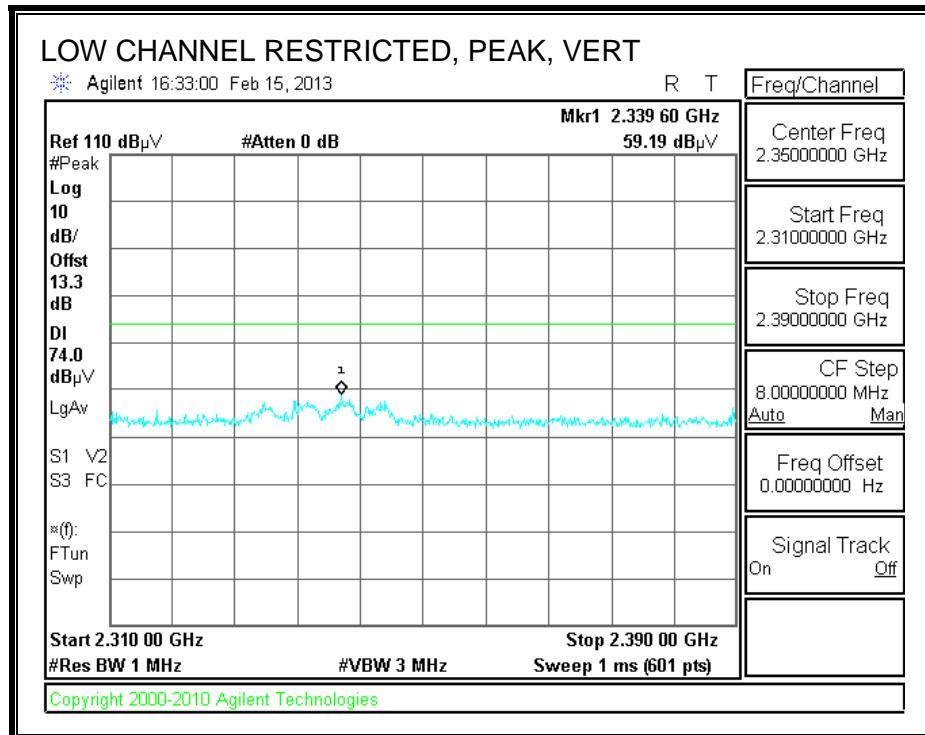




AUTHORIZED BANDEDGE (HIGH CHANNEL) CH10

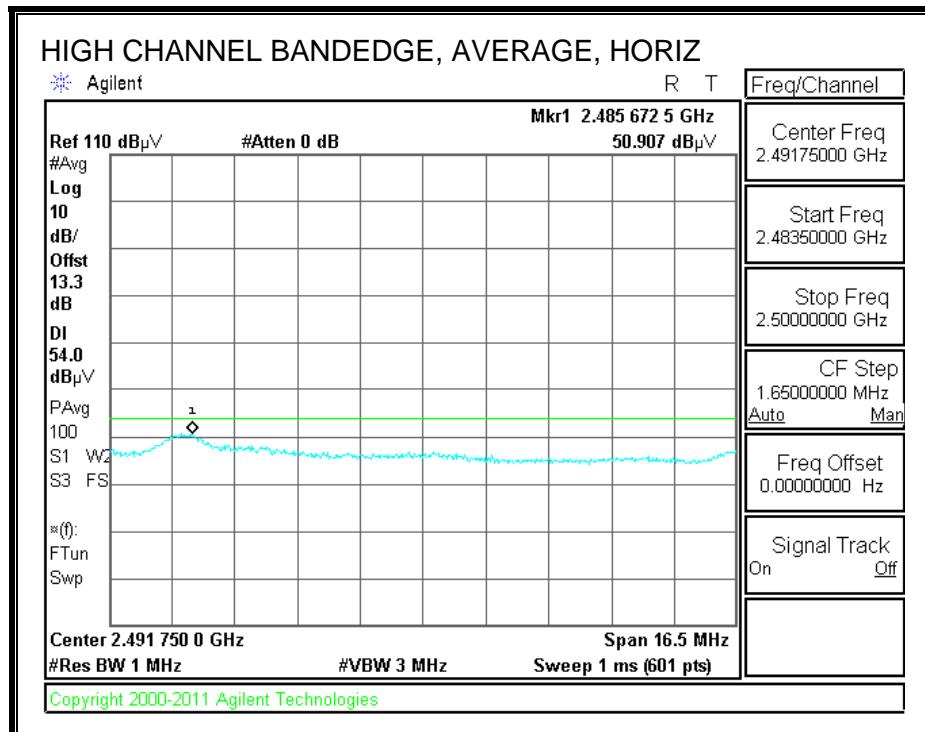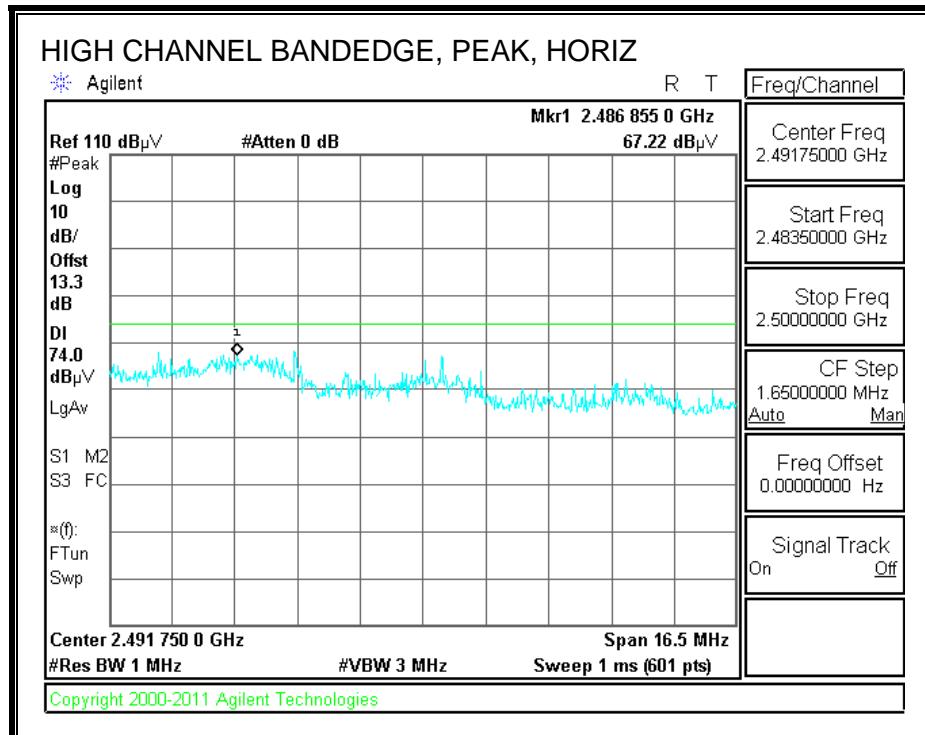

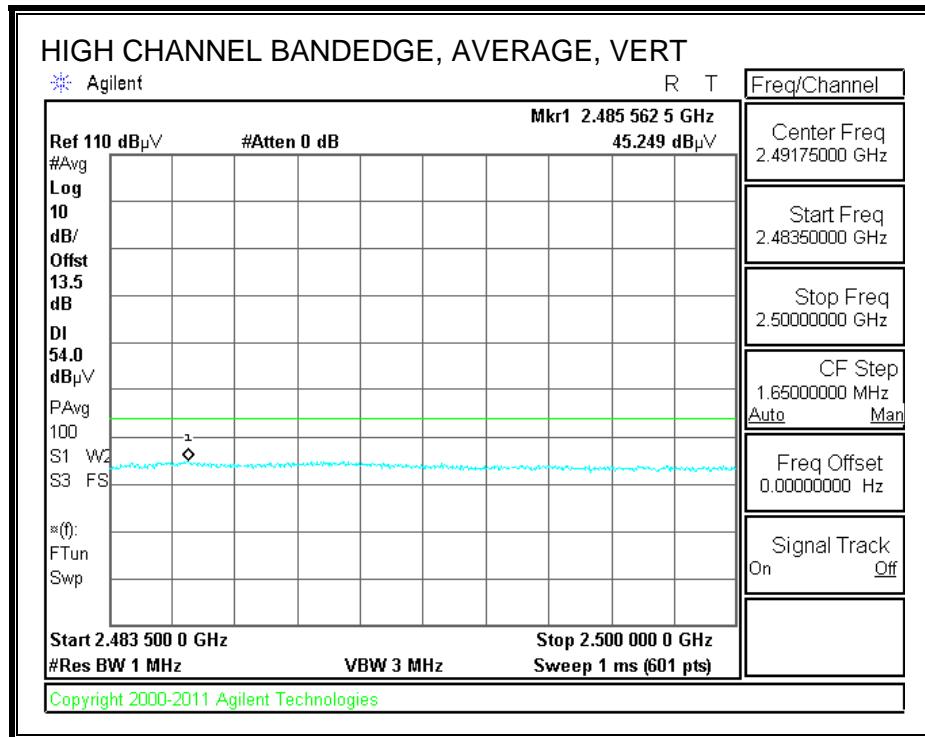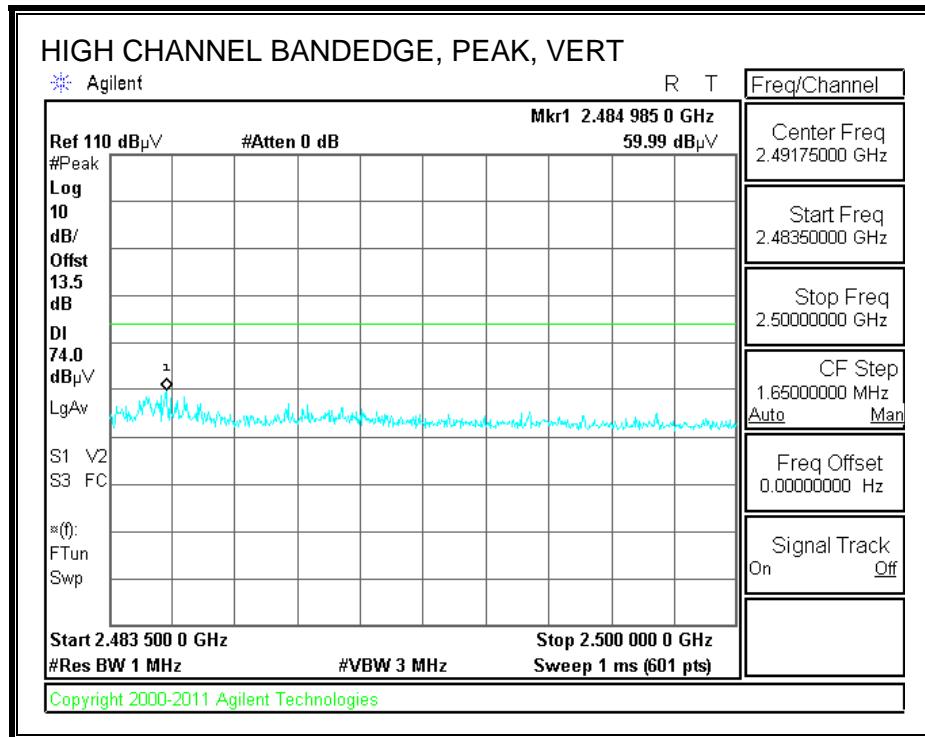

AUTHORIZED BANDEDGE (HIGH CHANNEL) CH11

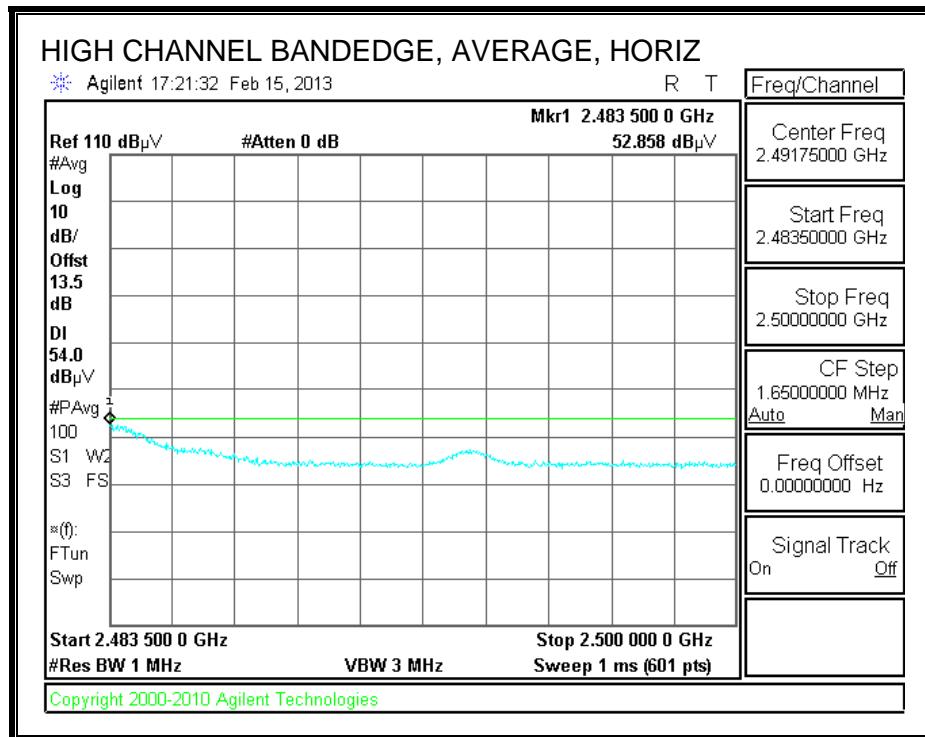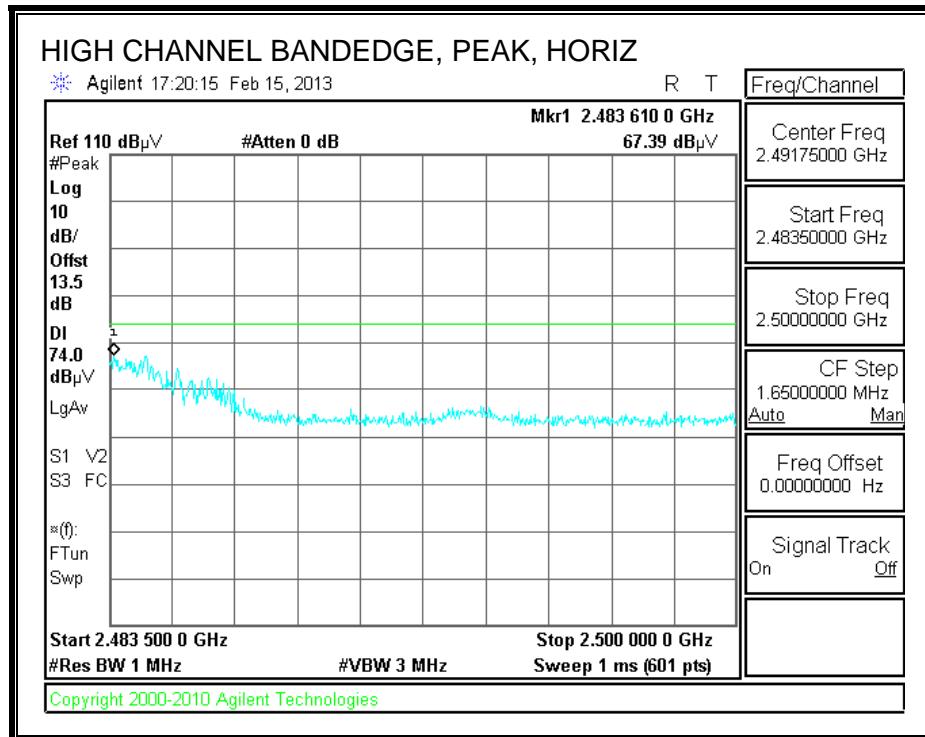

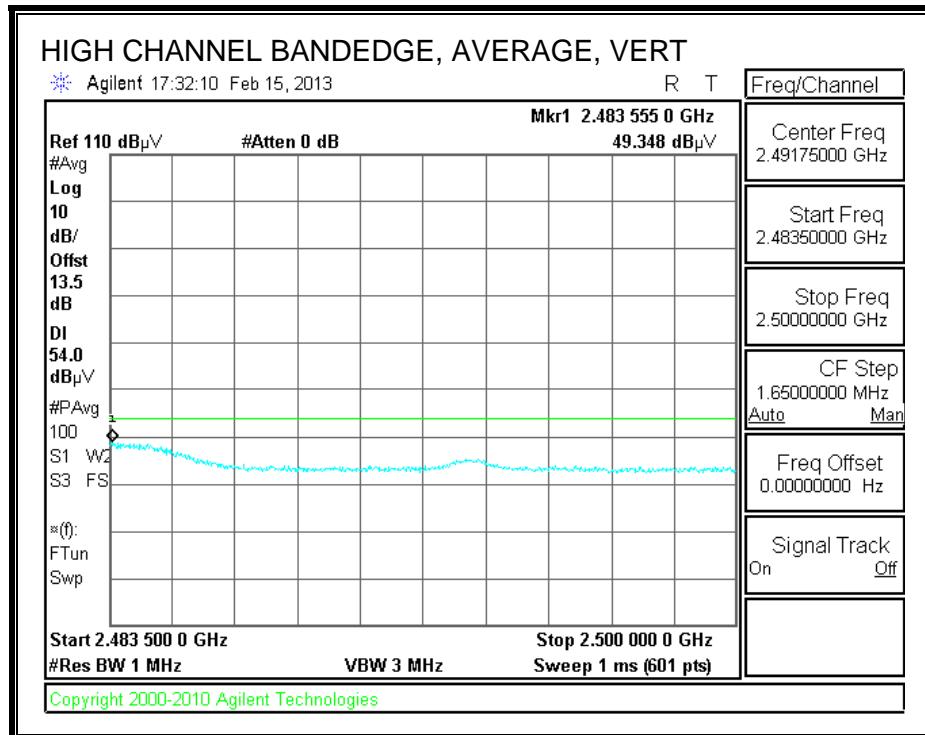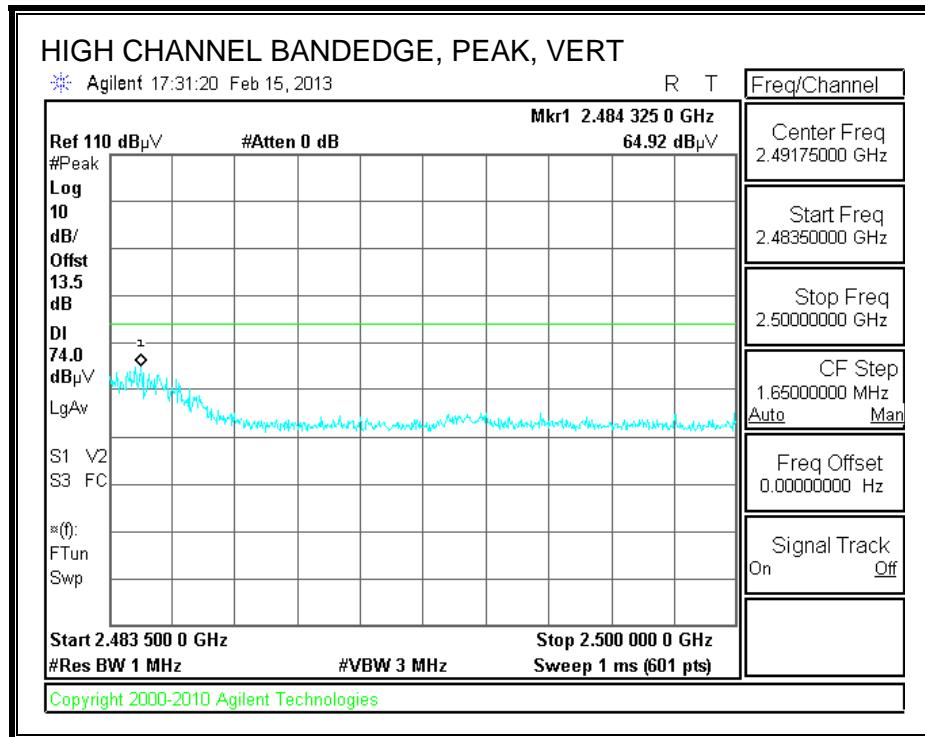

HARMONICS AND SPURIOUS EMISSIONS**High Frequency Measurement**
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Oliver Su
 Date: 02/18/13
 Project #: 12U14745
 Company: Apple
 Test Target:
 Mode Oper: 11n 3Tx HT20 Power= 23 dBm per each chain

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |


| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|------------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| Low Ch 2412MHz | | | | | | | | | | | | | |
| 4.824 | 3.0 | 40.3 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 46.1 | 74.0 | -27.9 | H | P | |
| 4.824 | 3.0 | 26.7 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 32.5 | 54.0 | -21.5 | H | A | |
| 12.060 | 3.0 | 33.3 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 52.1 | 74.0 | -21.9 | H | P | |
| 12.060 | 3.0 | 22.9 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 41.7 | 54.0 | -12.3 | H | A | |
| 4.824 | 3.0 | 36.1 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 41.9 | 74.0 | -32.1 | V | P | |
| 4.824 | 3.0 | 25.4 | 33.1 | 6.8 | -34.1 | 0.0 | 0.0 | 31.2 | 54.0 | -22.8 | V | A | |
| 12.060 | 3.0 | 33.7 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 52.5 | 74.0 | -21.5 | V | P | |
| 12.060 | 3.0 | 23.0 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 41.8 | 54.0 | -12.2 | V | A | |
| Mid Ch 2437MHz | | | | | | | | | | | | | |
| 4.874 | 3.0 | 38.7 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 44.6 | 74.0 | -29.4 | H | P | |
| 4.874 | 3.0 | 26.3 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 32.2 | 54.0 | -21.8 | H | A | |
| 7.311 | 3.0 | 34.9 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 46.7 | 74.0 | -27.3 | H | P | |
| 7.311 | 3.0 | 27.5 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 39.3 | 54.0 | -14.7 | H | A | |
| 4.874 | 3.0 | 35.5 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 41.4 | 74.0 | -32.6 | V | P | |
| 4.874 | 3.0 | 25.0 | 33.1 | 6.8 | -34.0 | 0.0 | 0.0 | 30.9 | 54.0 | -23.1 | V | A | |
| 7.311 | 3.0 | 35.1 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 46.9 | 74.0 | -27.1 | V | P | |
| 7.311 | 3.0 | 23.7 | 35.8 | 9.1 | -33.1 | 0.0 | 0.0 | 35.5 | 54.0 | -18.5 | V | A | |
| High Ch 2462MHz | | | | | | | | | | | | | |
| 4.924 | 3.0 | 36.2 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 42.2 | 74.0 | -31.8 | H | P | |
| 4.924 | 3.0 | 26.1 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 32.1 | 54.0 | -21.9 | H | A | |
| 7.386 | 3.0 | 36.1 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 48.1 | 74.0 | -25.9 | H | P | |
| 7.386 | 3.0 | 28.8 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 40.8 | 54.0 | -13.2 | H | A | |
| 4.924 | 3.0 | 35.7 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 41.7 | 74.0 | -32.3 | V | P | |
| 4.924 | 3.0 | 25.3 | 33.2 | 6.8 | -34.0 | 0.0 | 0.0 | 31.3 | 54.0 | -22.7 | V | A | |
| 7.386 | 3.0 | 34.5 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 46.5 | 74.0 | -27.5 | V | P | |
| 7.386 | 3.0 | 24.0 | 35.9 | 9.1 | -33.1 | 0.0 | 0.0 | 36.0 | 54.0 | -18.0 | V | A | |


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.11. TX ABOVE 1 GHz 802.11n HT20 BF 2TX MODE IN THE 2.4 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL) CH1


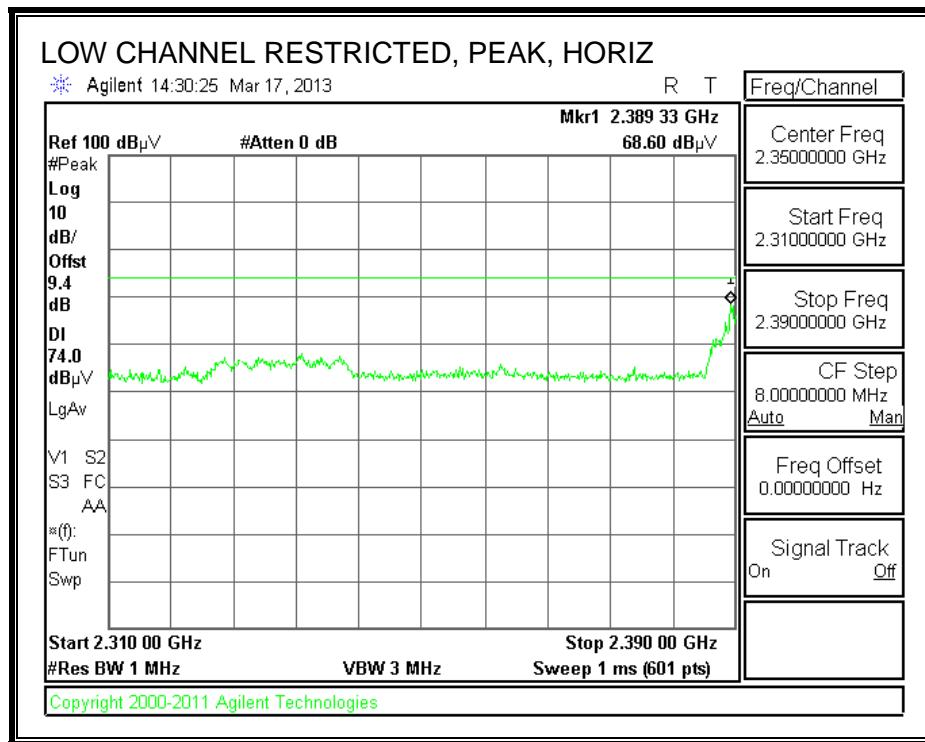


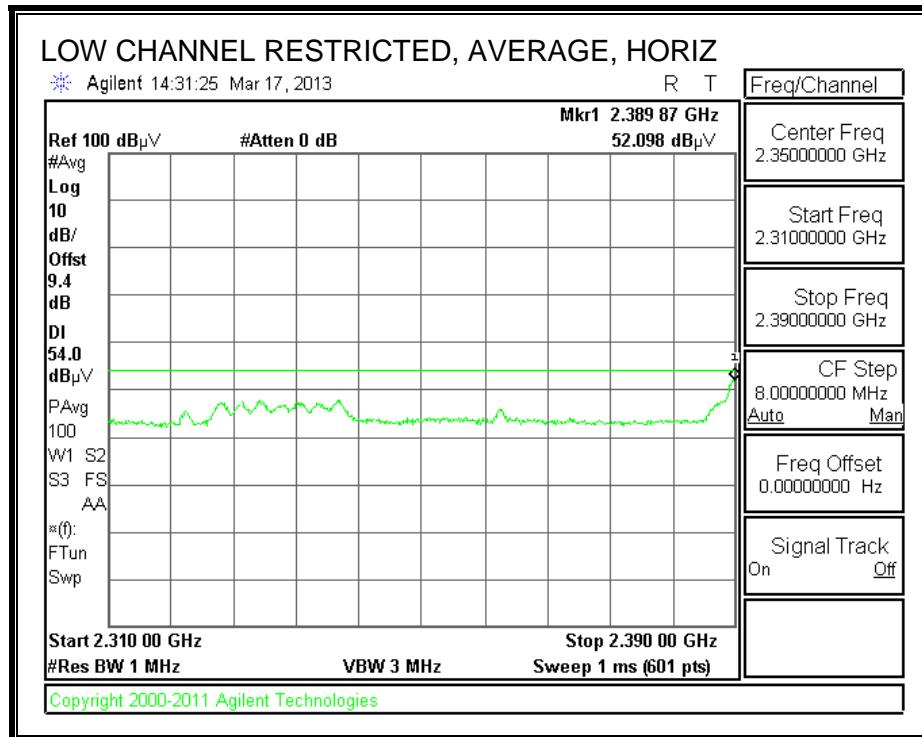

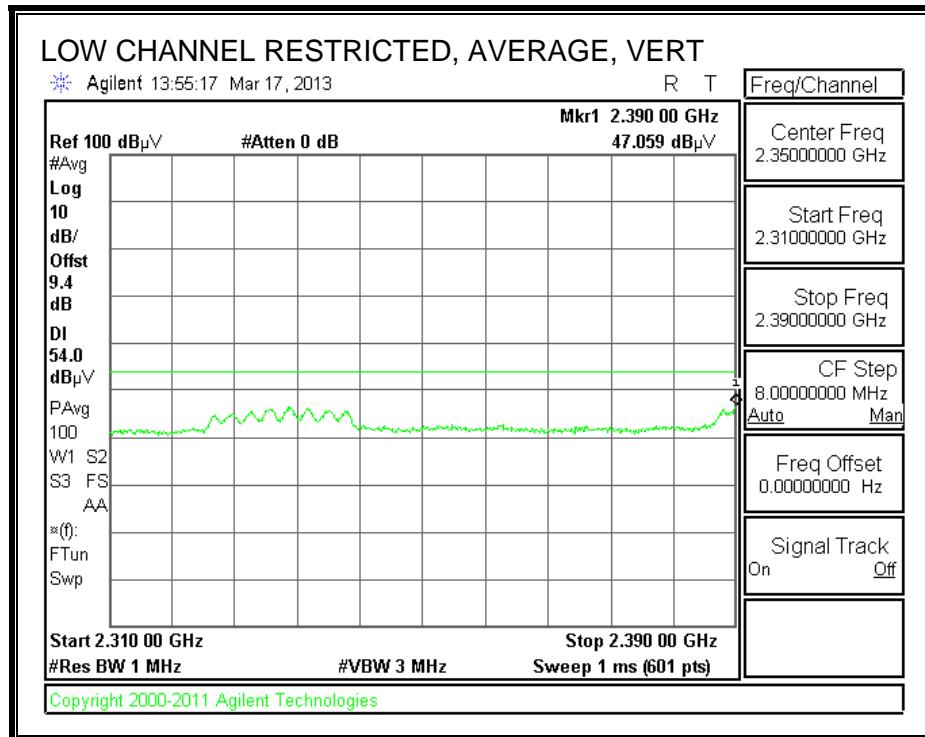
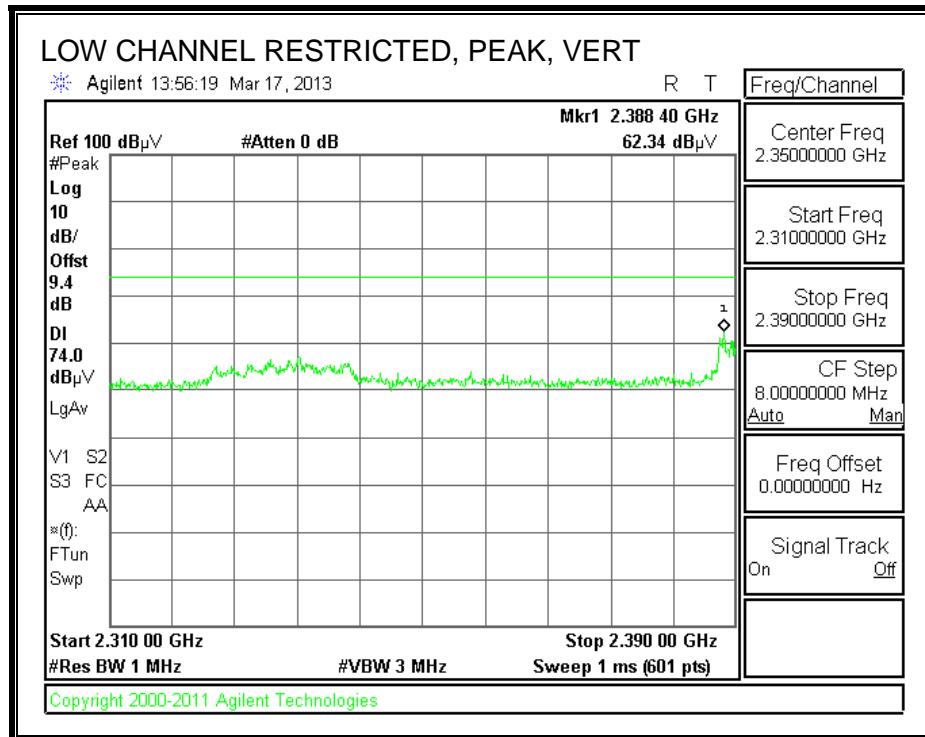




RESTRICTED BANDEDGE (LOW CHANNEL) CH2

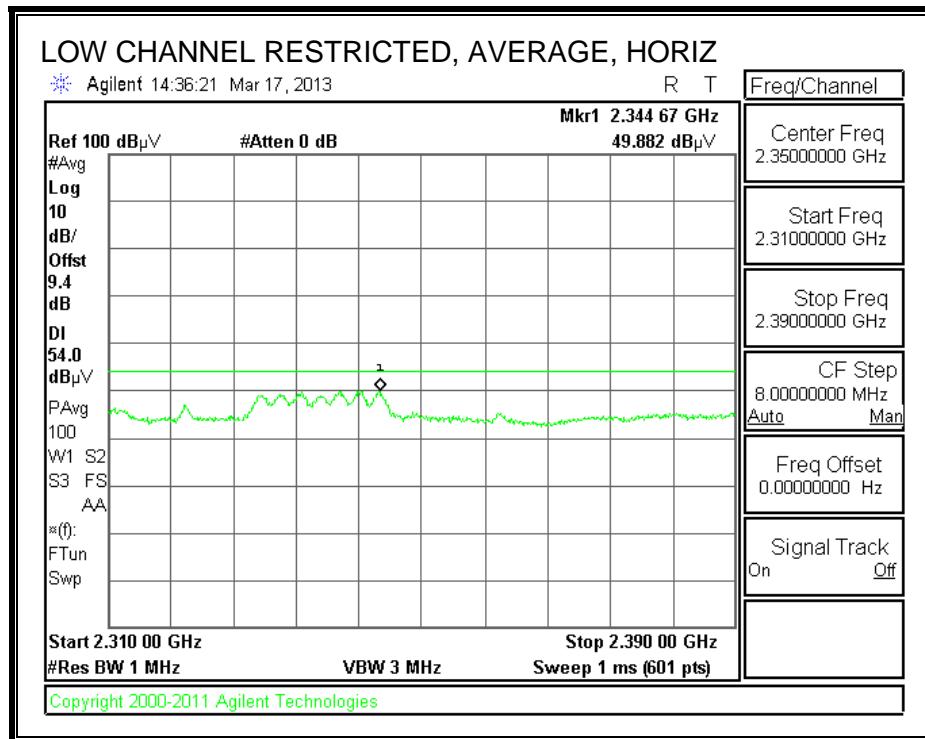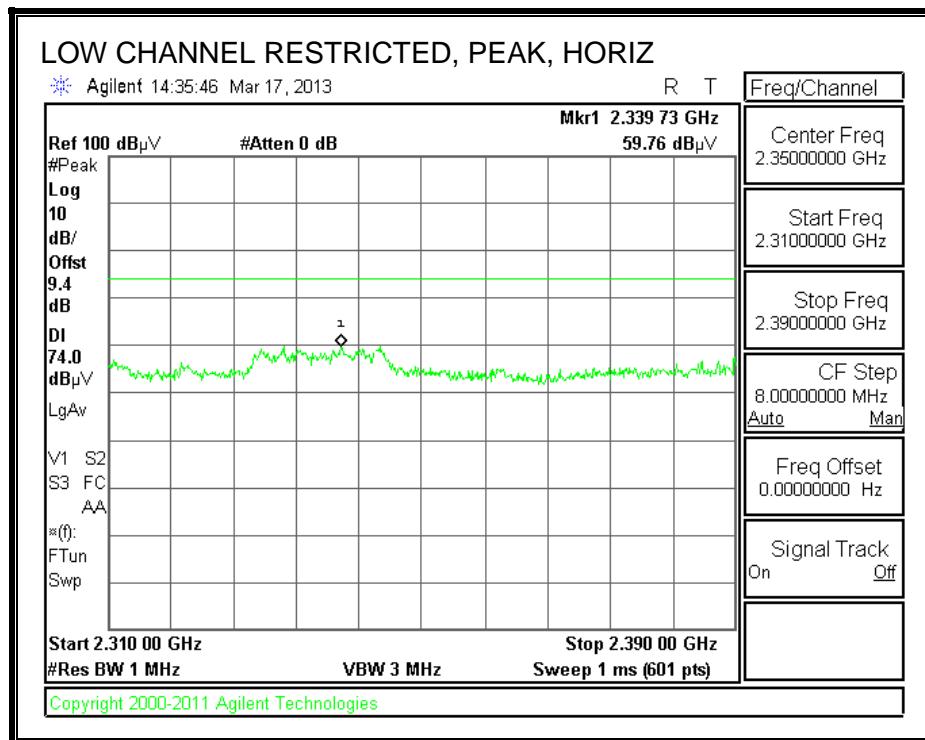

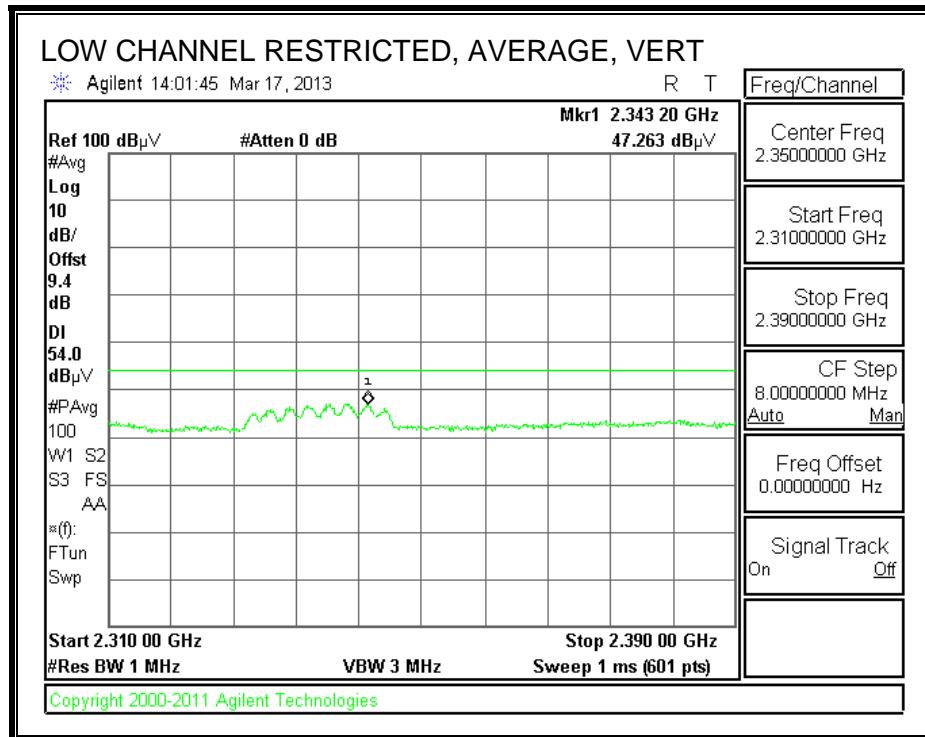
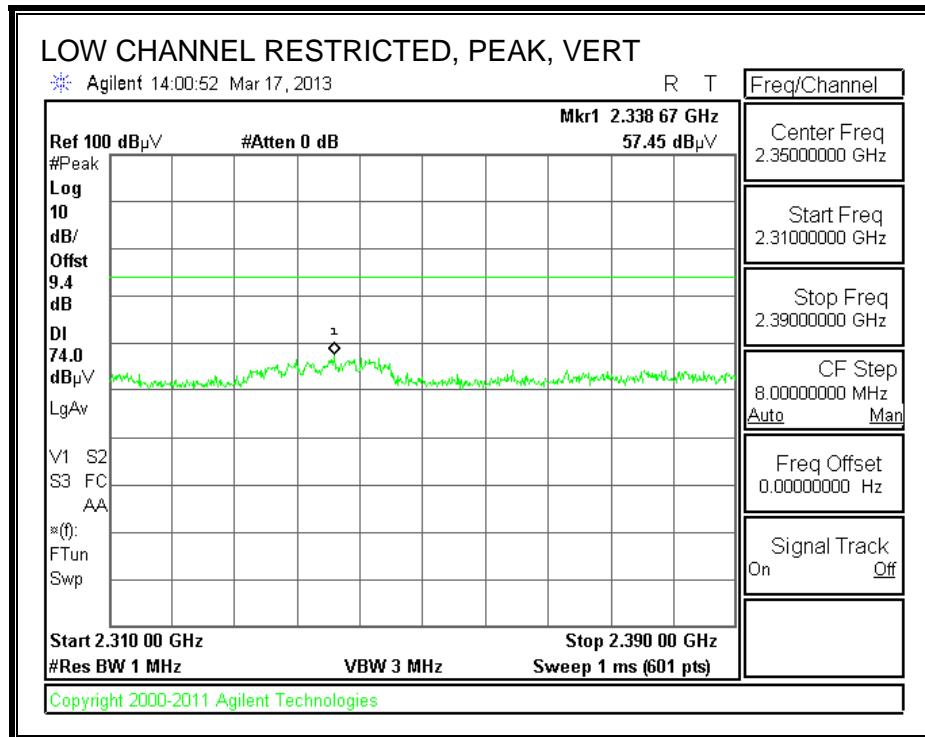




AUTHORIZED BANDEDGE (HIGH CHANNEL) CH10

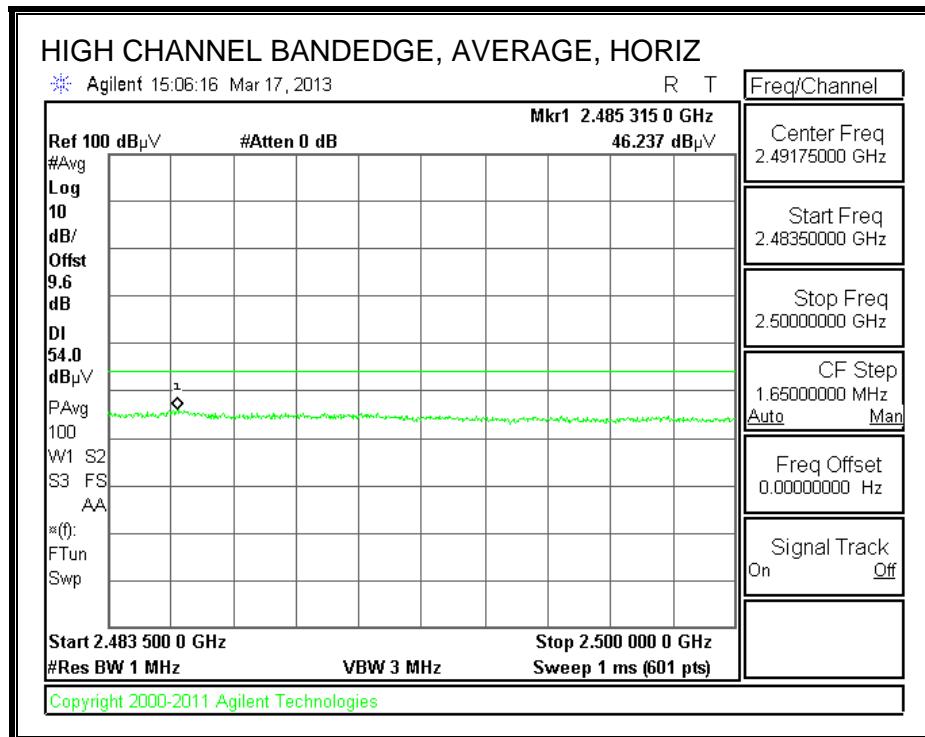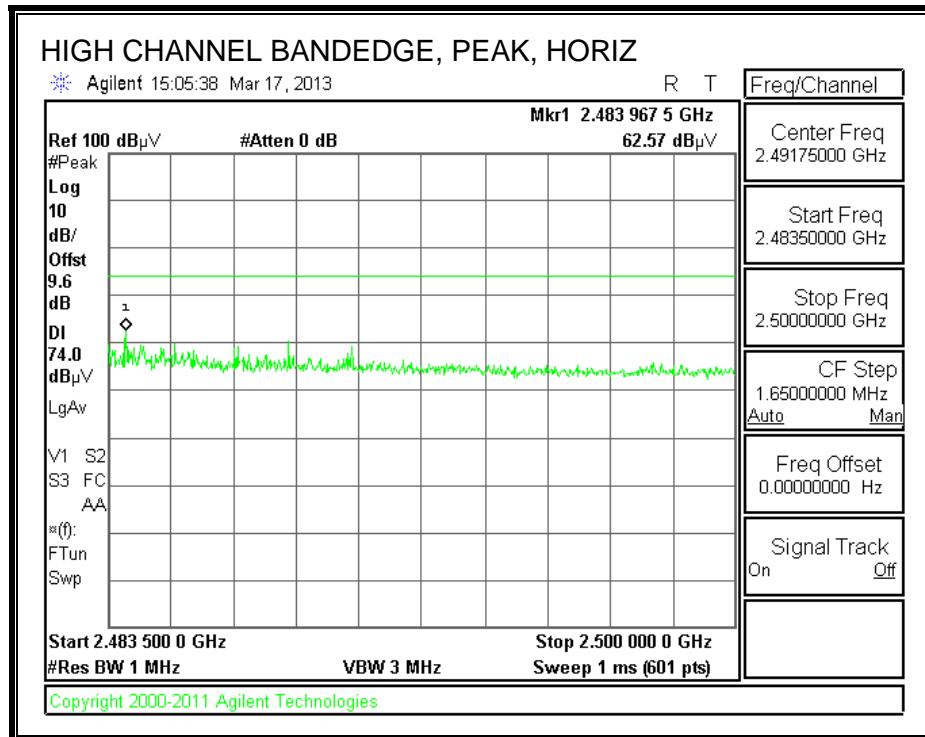

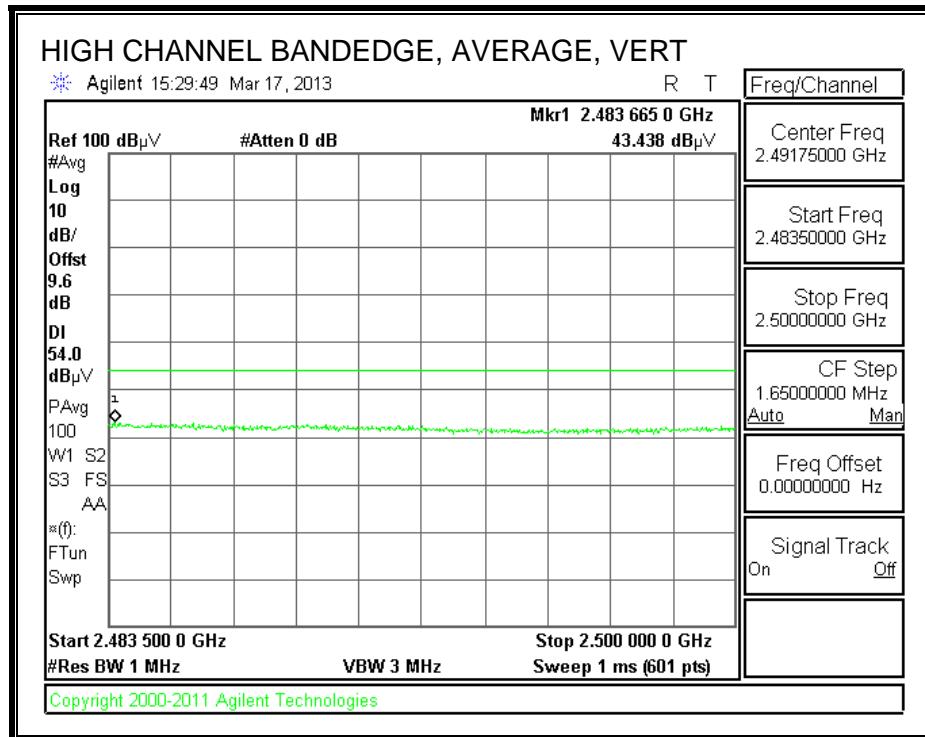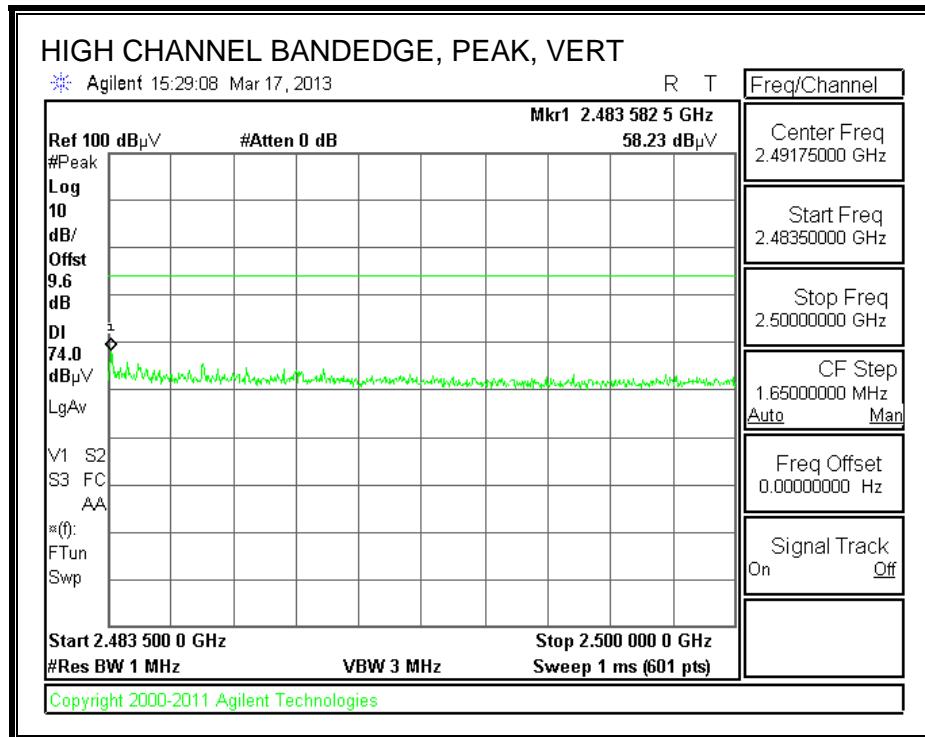

AUTHORIZED BANDEDGE (HIGH CHANNEL) CH11

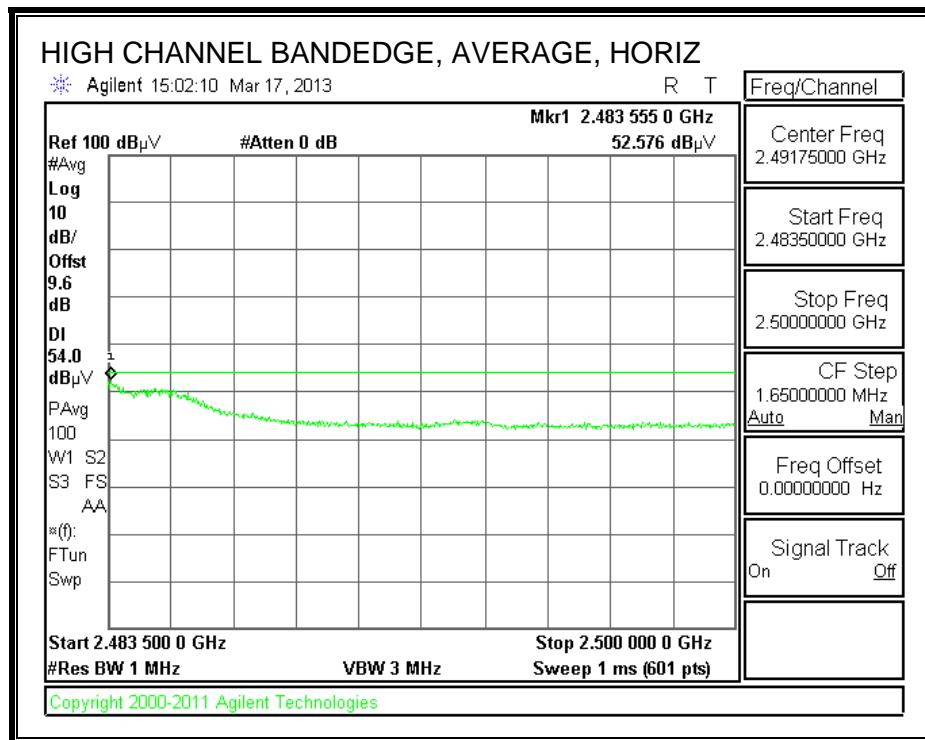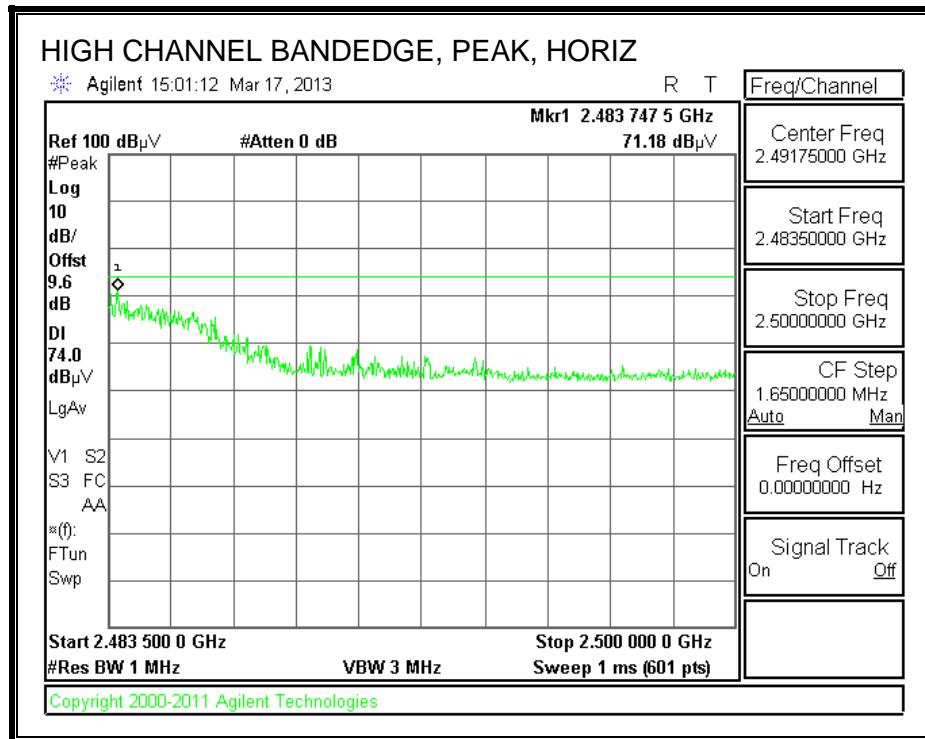

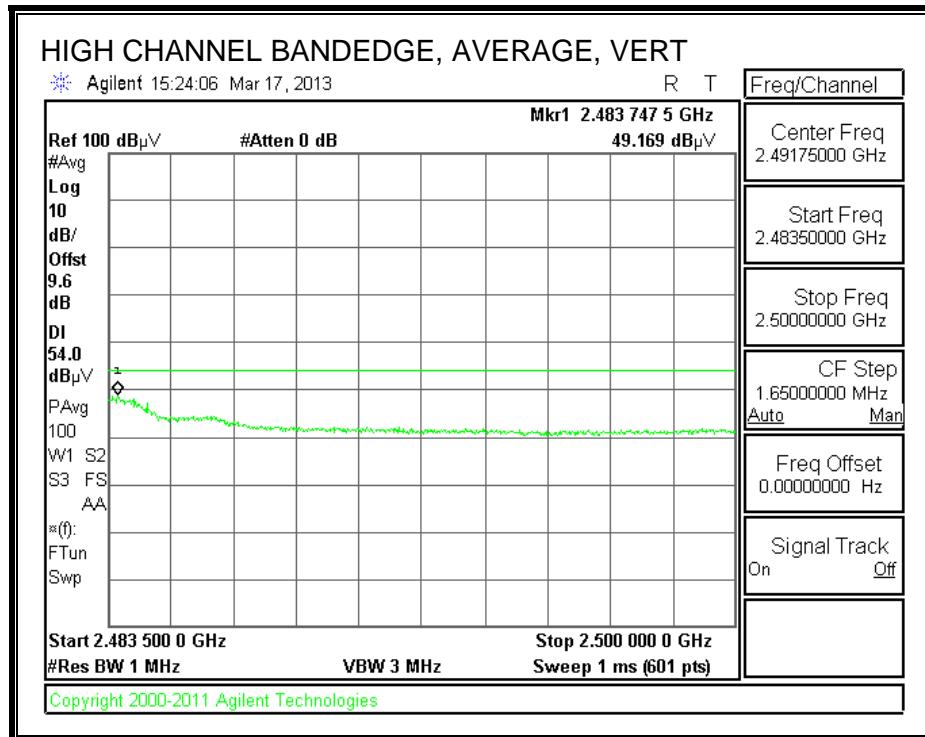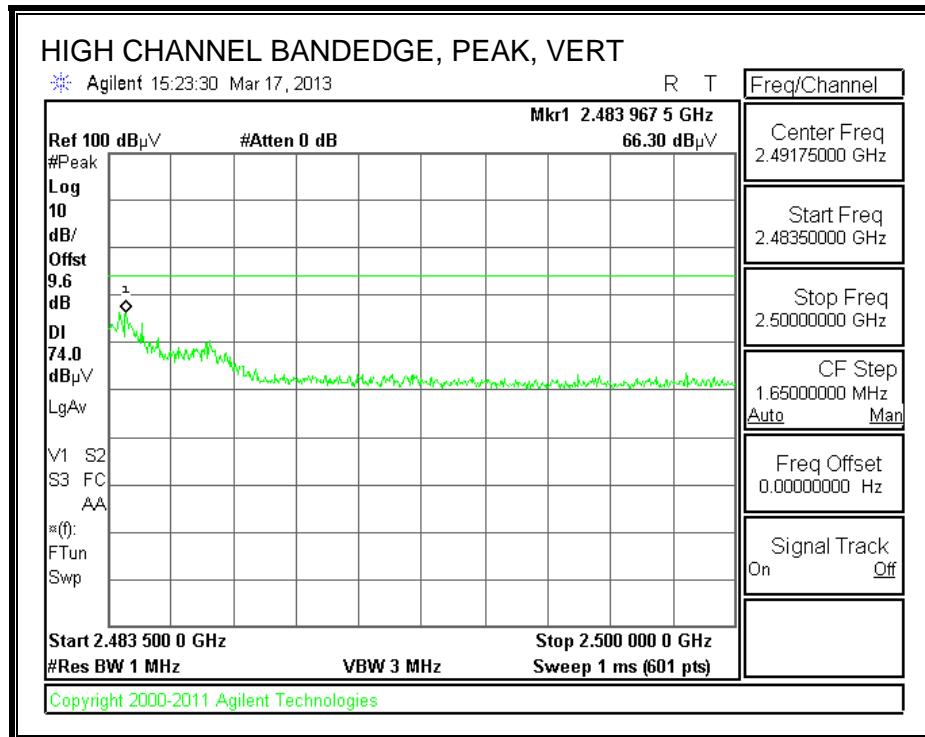

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 03/15/13
Project #: 12U14745
Company: Apple
Test Target: FCC Class B
Mode Oper: BF HT20 3TX mode

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |


| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|----------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| 2412 MHz BF HT20 3TX | | | | | | | | | | | | | |
| 4.824 | 3.0 | 41.2 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 45.5 | 74.0 | -28.5 | V | P | |
| 4.824 | 3.0 | 28.7 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 33.0 | 54.0 | -21.0 | V | A | |
| 4.824 | 3.0 | 50.8 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 55.2 | 74.0 | -18.8 | H | P | |
| 4.824 | 3.0 | 39.0 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 43.3 | 54.0 | -10.7 | H | A | |
| 2437 MHz BF HT20 3TX | | | | | | | | | | | | | |
| 4.874 | 3.0 | 53.6 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 58.0 | 74.0 | -16.0 | H | P | |
| 4.874 | 3.0 | 42.2 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 46.6 | 54.0 | -7.4 | H | A | |
| 4.874 | 3.0 | 38.8 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 43.2 | 74.0 | -30.8 | V | P | |
| 4.874 | 3.0 | 28.3 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 32.7 | 54.0 | -21.3 | V | A | |
| 2462 MHz BF HT20 3TX | | | | | | | | | | | | | |
| 4.924 | 3.0 | 54.4 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 58.9 | 74.0 | -15.1 | H | P | |
| 4.924 | 3.0 | 42.3 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 46.8 | 54.0 | -7.2 | H | A | |
| 4.924 | 3.0 | 39.4 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 43.9 | 74.0 | -30.1 | V | P | |
| 4.924 | 3.0 | 28.7 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 33.2 | 54.0 | -20.8 | V | A | |


Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

9.12. TX ABOVE 1 GHz 802.11n HT20 BF 3TX MODE IN THE 2.4 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL) CH1


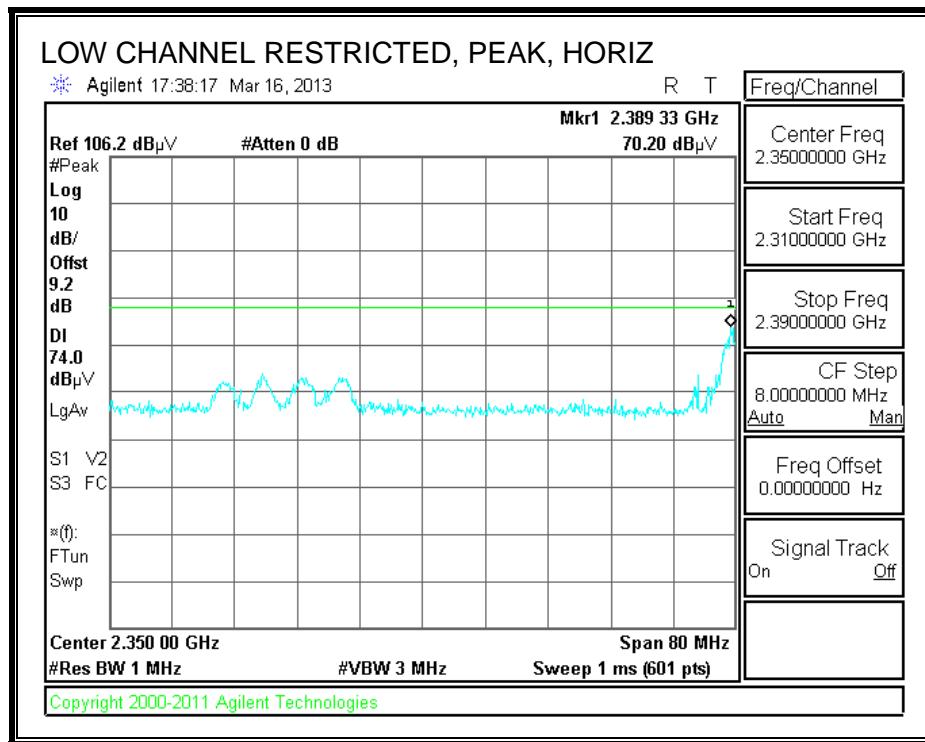


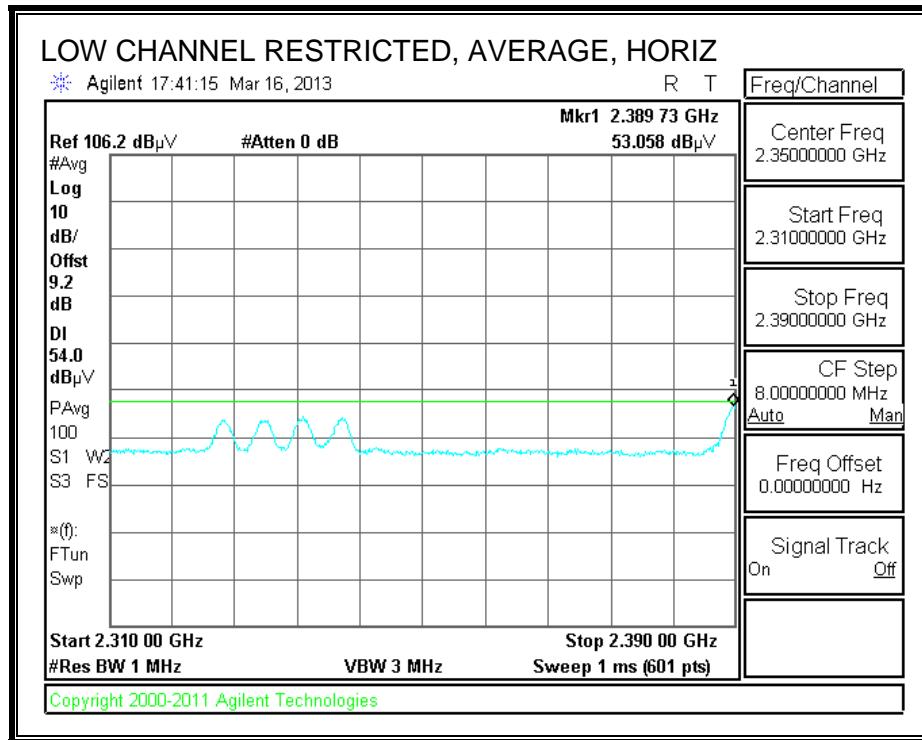

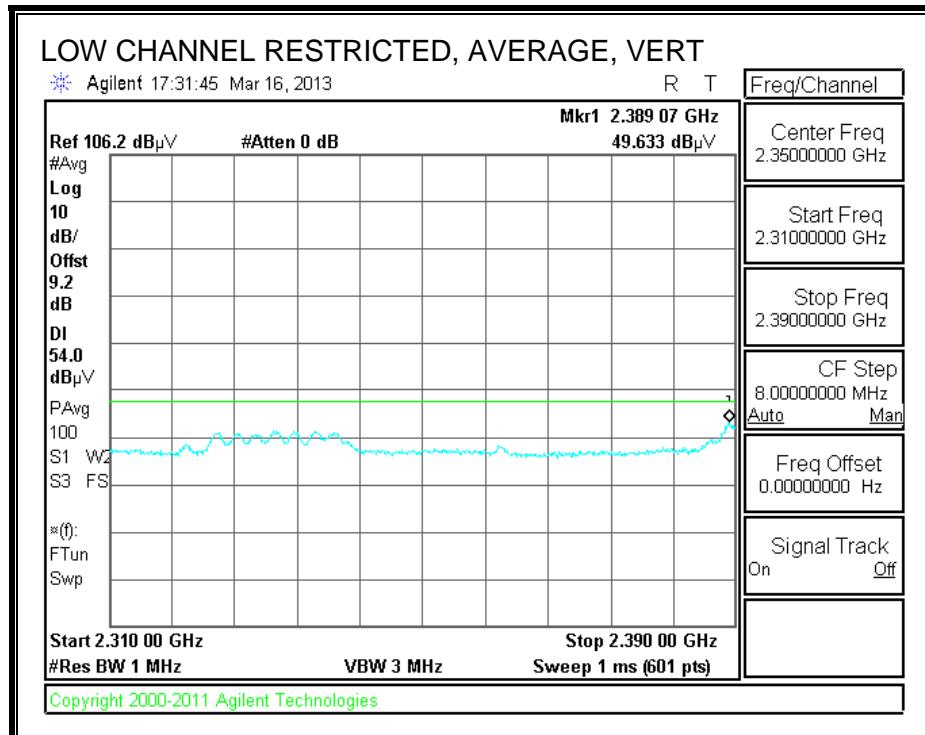
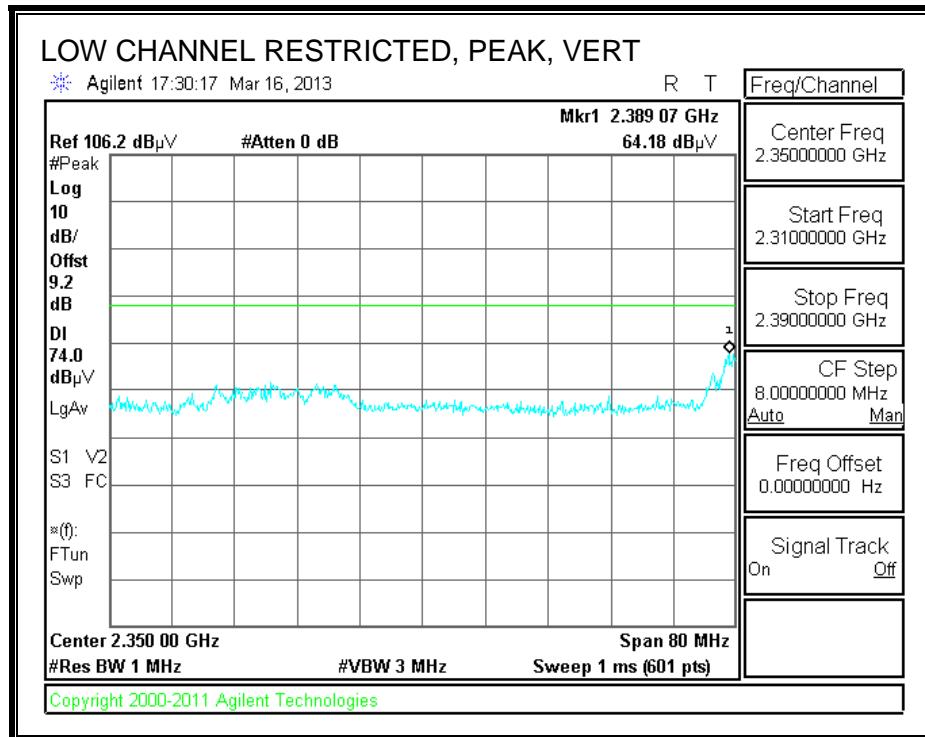




RESTRICTED BANDEDGE (LOW CHANNEL) CH2

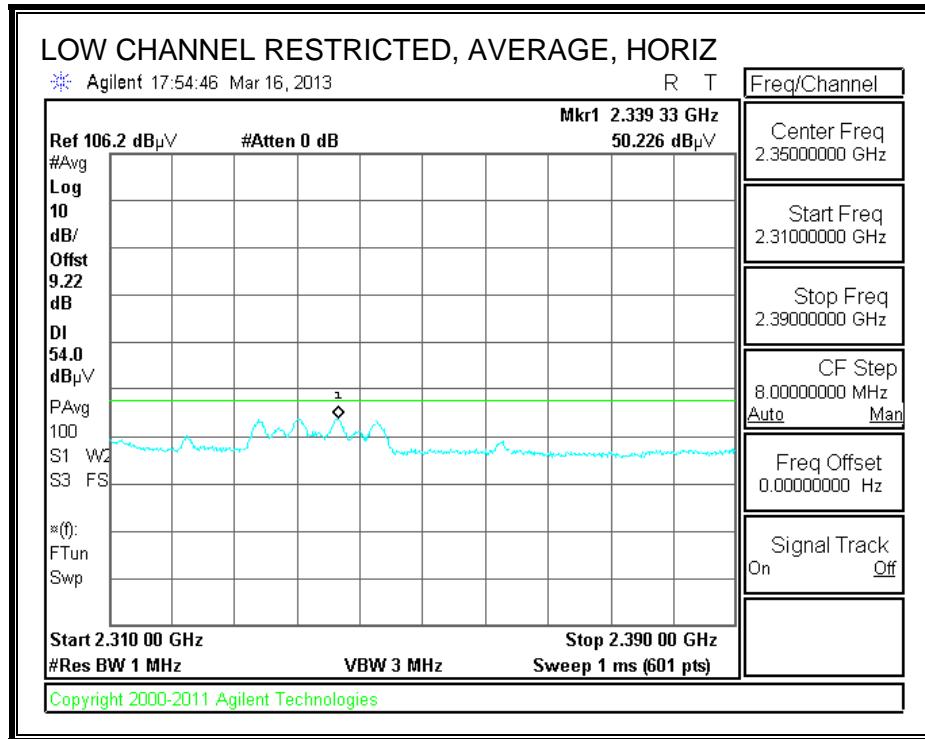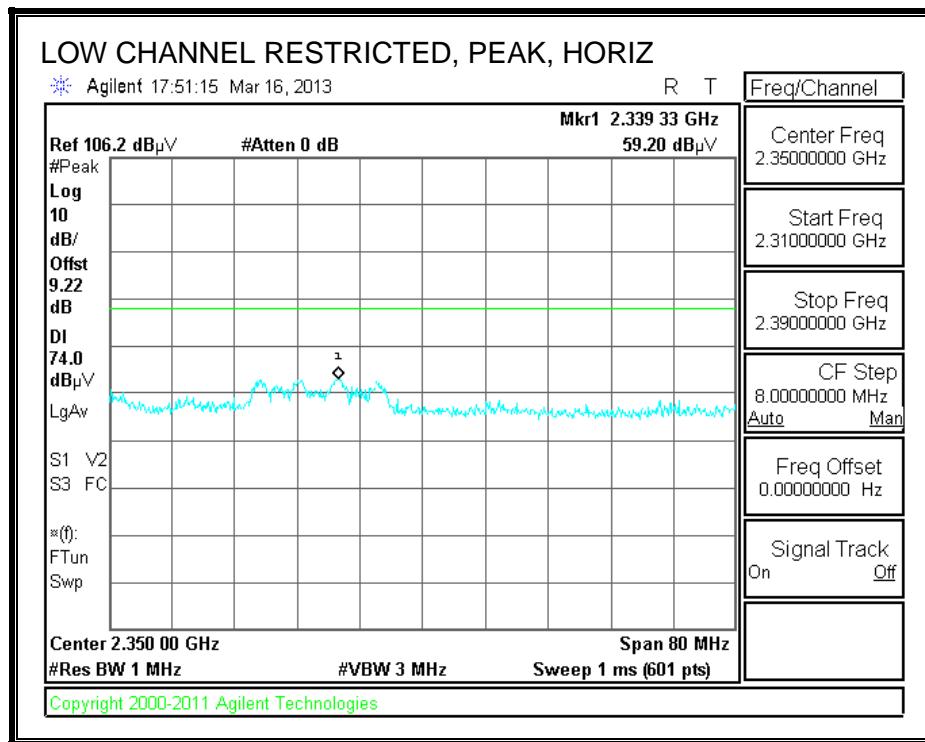

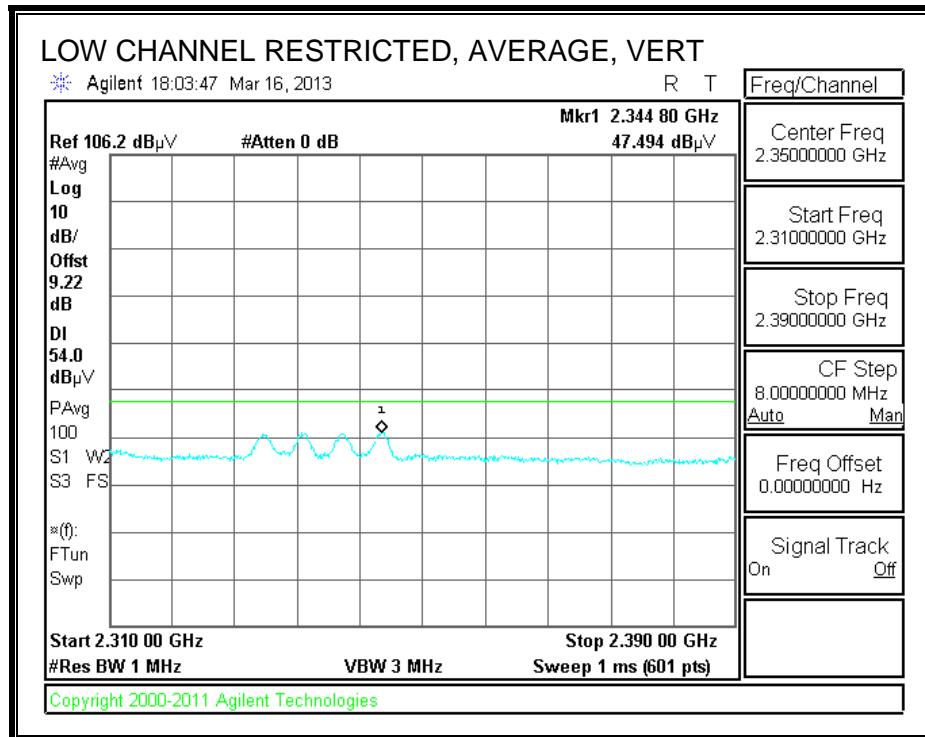
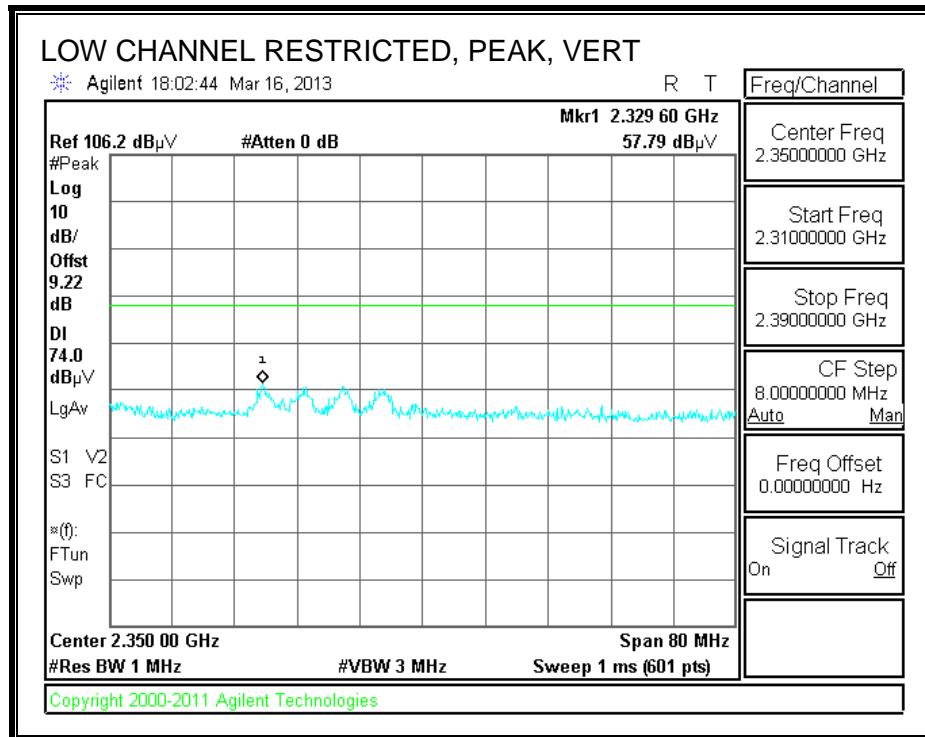




AUTHORIZED BANDEDGE (HIGH CHANNEL) CH10

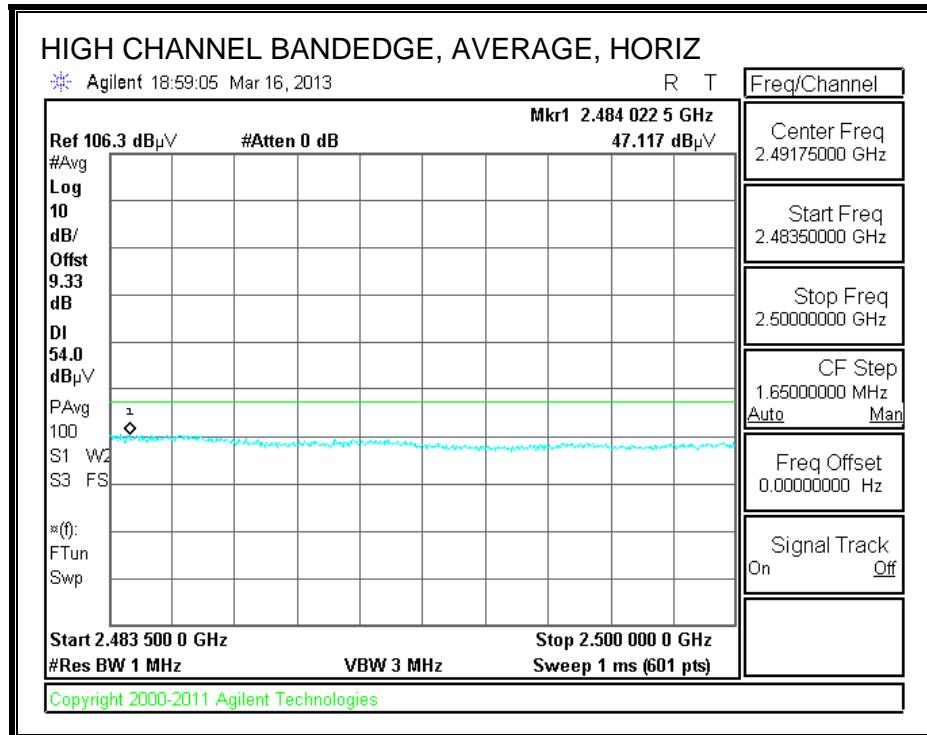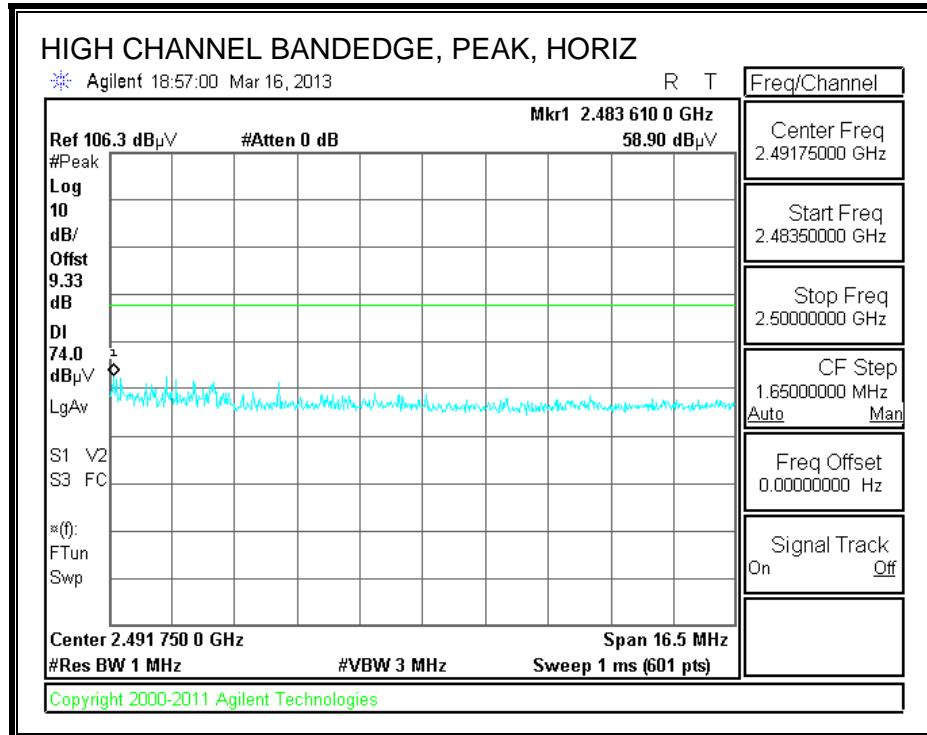

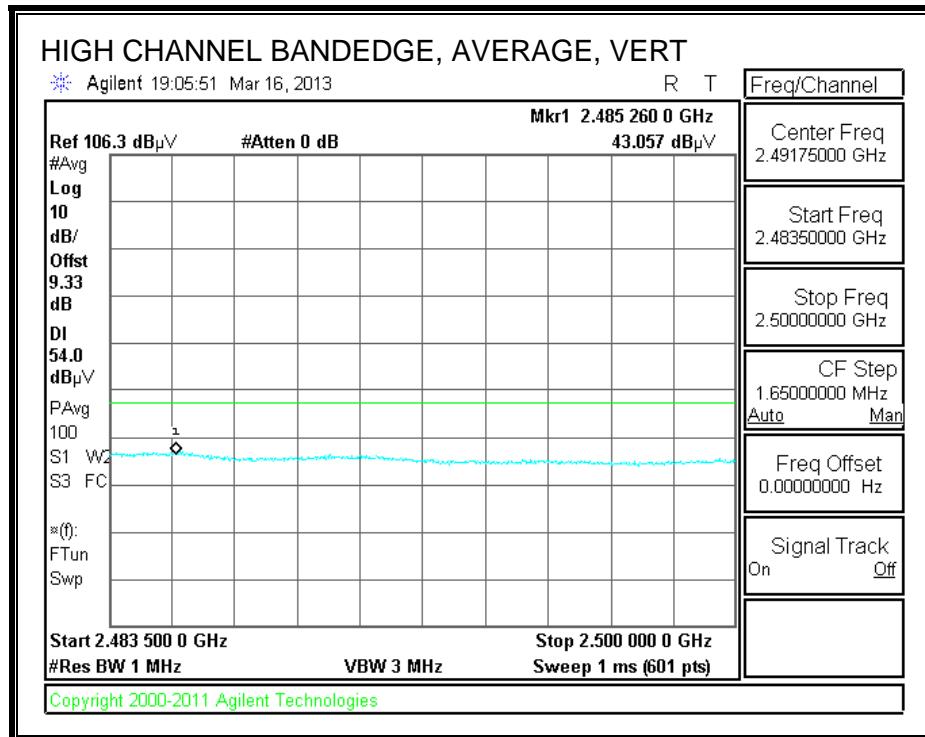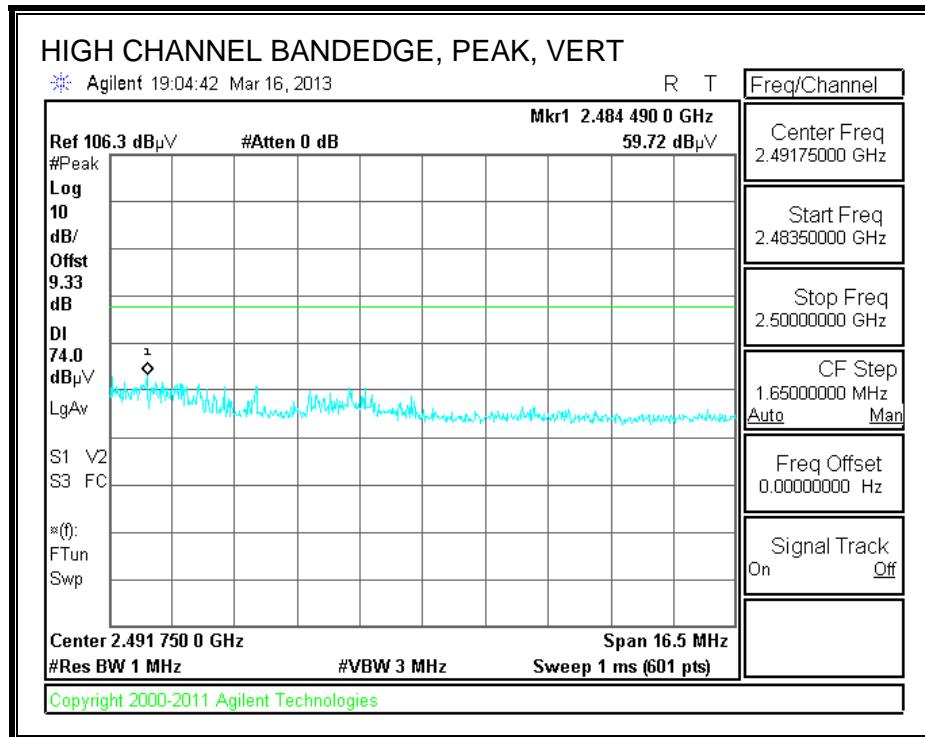

AUTHORIZED BANDEDGE (HIGH CHANNEL) CH11

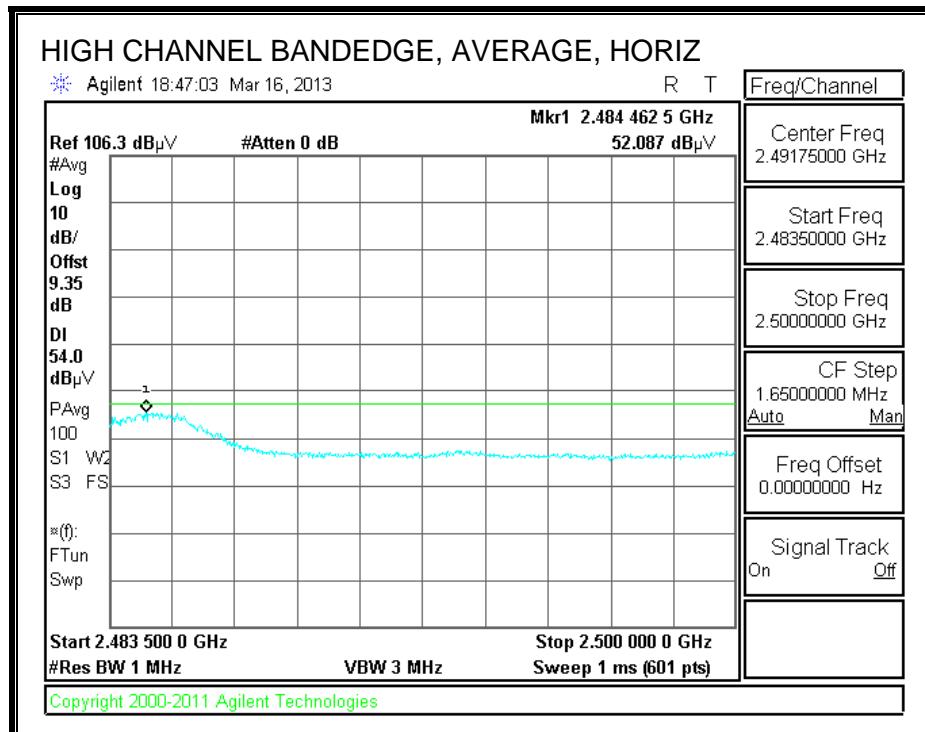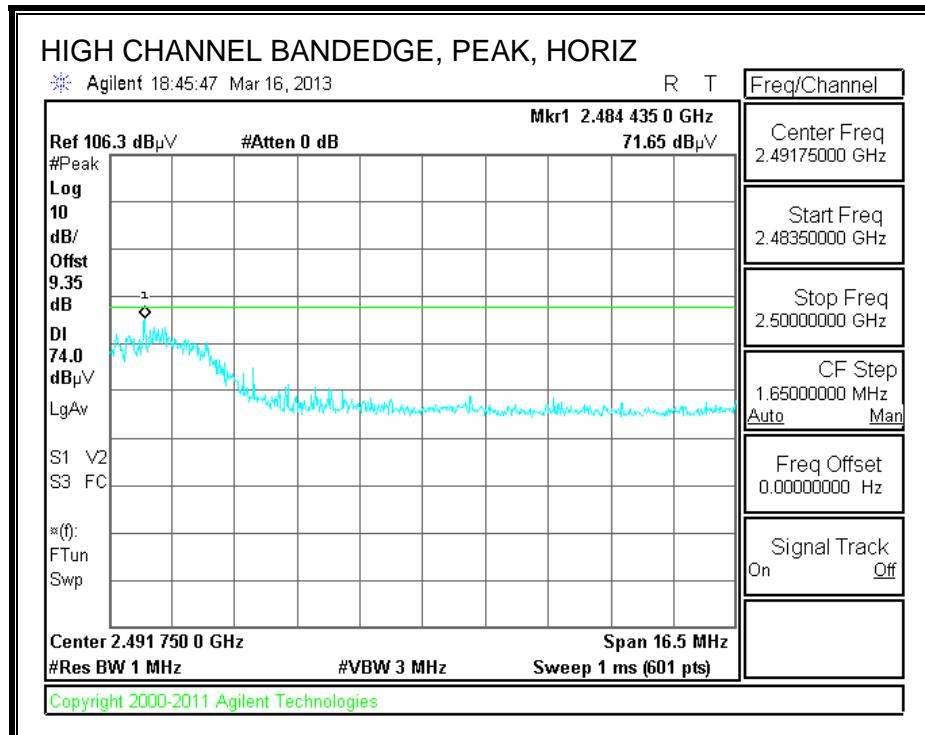

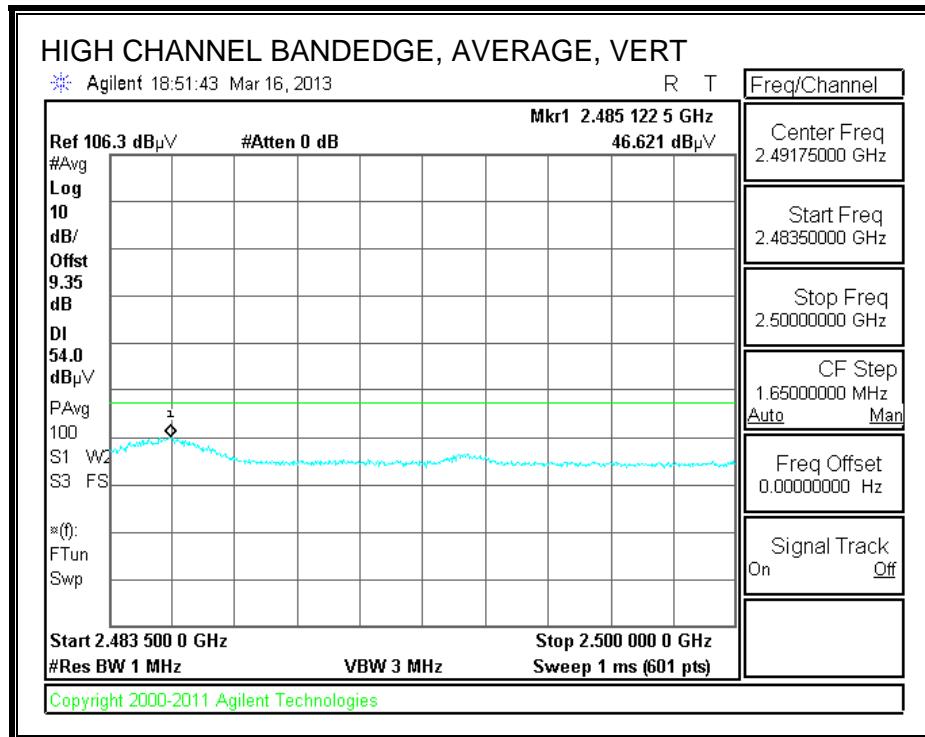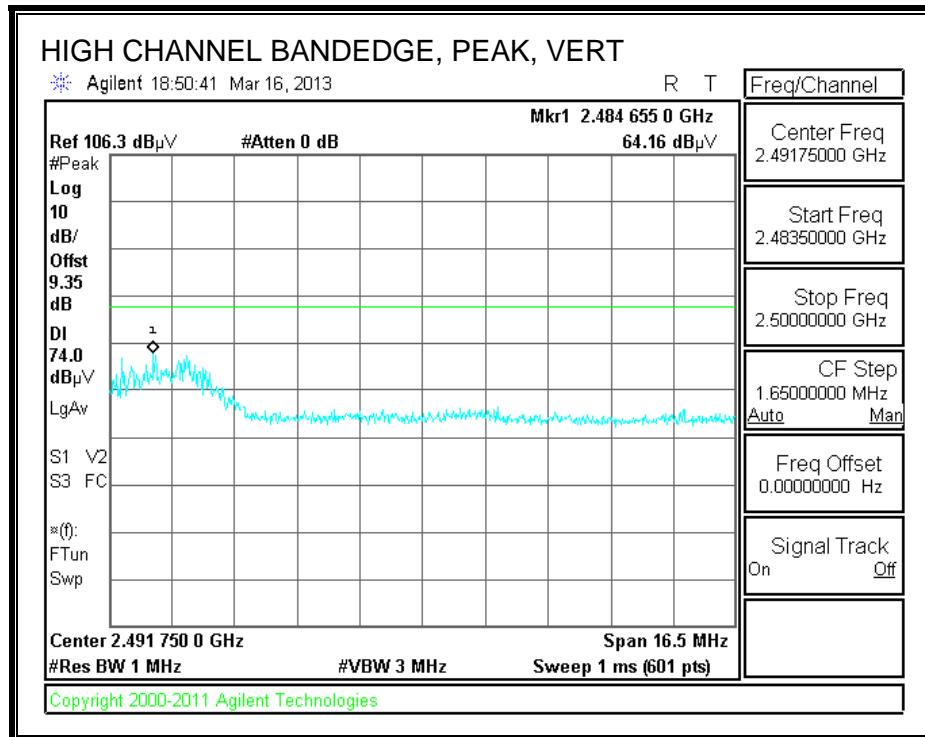

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 03/15/13
Project #: 12U14745
Company: Apple
Test Target: FCC Class B
Mode Oper: BF HT20 3TX mode

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |

| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|----------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| 2412 MHz BF HT20 3TX | | | | | | | | | | | | | |
| 4.824 | 3.0 | 41.2 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 45.5 | 74.0 | -28.5 | V | P | |
| 4.824 | 3.0 | 28.7 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 33.0 | 54.0 | -21.0 | V | A | |
| 4.824 | 3.0 | 50.8 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 55.2 | 74.0 | -18.8 | H | P | |
| 4.824 | 3.0 | 39.0 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 43.3 | 54.0 | -10.7 | H | A | |
| 2437 MHz BF HT20 3TX | | | | | | | | | | | | | |
| 4.874 | 3.0 | 53.6 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 58.0 | 74.0 | -16.0 | H | P | |
| 4.874 | 3.0 | 42.2 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 46.6 | 54.0 | -7.4 | H | A | |
| 4.874 | 3.0 | 38.8 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 43.2 | 74.0 | -30.8 | V | P | |
| 4.874 | 3.0 | 28.3 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 32.7 | 54.0 | -21.3 | V | A | |
| 2462 MHz BF HT20 3TX | | | | | | | | | | | | | |
| 4.924 | 3.0 | 54.4 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 58.9 | 74.0 | -15.1 | H | P | |
| 4.924 | 3.0 | 42.3 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 46.8 | 54.0 | -7.2 | H | A | |
| 4.924 | 3.0 | 39.4 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 43.9 | 74.0 | -30.1 | V | P | |
| 4.924 | 3.0 | 28.7 | 33.6 | 6.3 | -35.5 | 0.0 | 0.0 | 33.2 | 54.0 | -20.8 | V | A | |

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

9.13. TX ABOVE 1 GHz 802.11a 1TX MODE IN THE 5.8 GHz BAND

Covered by testing HT20 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

9.14. TX ABOVE 1 GHz 802.11a 2TX MODE IN THE 5.8 GHz BAND

Covered by testing HT20 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

9.15. TX ABOVE 1 GHz 802.11a 3TX MODE IN THE 5.8 GHz BAND

Covered by testing HT20 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

9.16. TX ABOVE 1 GHz 802.11n HT20 1TX MODE IN THE 5.8 GHz BAND

Covered by testing HT20 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

9.17. TX ABOVE 1 GHz 802.11n HT20 2TX MODE IN THE 5.8 GHz BAND

Covered by testing HT20 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

9.18. TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 02/19/13
Project #: 12U14745
Company: Apple
Test Target: FCC Class B
Mode Oper: HT20 TX mode

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |

| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|-----------------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| 5745MHz HT20 3TX CDD | | | | | | | | | | | | | |
| 11.490 | 3.0 | 32.4 | 38.9 | 11.2 | -33.1 | 0.0 | 0.7 | 50.1 | 74.0 | -23.9 | V | P | |
| 11.490 | 3.0 | 20.2 | 38.9 | 11.2 | -33.1 | 0.0 | 0.7 | 37.9 | 54.0 | -16.1 | V | A | |
| 11.490 | 3.0 | 33.5 | 38.9 | 11.2 | -33.1 | 0.0 | 0.7 | 51.2 | 74.0 | -22.8 | H | P | |
| 11.490 | 3.0 | 21.2 | 38.9 | 11.2 | -33.1 | 0.0 | 0.7 | 38.9 | 54.0 | -15.1 | H | A | |
| 5785MHz HT20 3TX CDD | | | | | | | | | | | | | |
| 11.570 | 3.0 | 34.8 | 38.9 | 11.3 | -33.0 | 0.0 | 0.7 | 52.8 | 74.0 | -21.2 | H | P | |
| 11.570 | 3.0 | 22.0 | 38.9 | 11.3 | -33.0 | 0.0 | 0.7 | 40.0 | 54.0 | -14.0 | H | A | |
| 11.570 | 3.0 | 33.9 | 38.9 | 11.3 | -33.0 | 0.0 | 0.7 | 51.9 | 74.0 | -22.1 | V | P | |
| 11.570 | 3.0 | 20.4 | 38.9 | 11.3 | -33.0 | 0.0 | 0.7 | 38.4 | 54.0 | -15.6 | V | A | |
| 5825MHz HT20 3TX CDD | | | | | | | | | | | | | |
| 11.650 | 3.0 | 33.5 | 39.0 | 11.4 | -32.9 | 0.0 | 0.7 | 51.7 | 74.0 | -22.3 | V | P | |
| 11.650 | 3.0 | 20.9 | 39.0 | 11.4 | -32.9 | 0.0 | 0.7 | 39.2 | 54.0 | -14.8 | V | A | |
| 11.650 | 3.0 | 34.2 | 39.0 | 11.4 | -32.9 | 0.0 | 0.7 | 52.5 | 74.0 | -21.5 | H | P | |
| 11.650 | 3.0 | 22.4 | 39.0 | 11.4 | -32.9 | 0.0 | 0.7 | 40.7 | 54.0 | -13.3 | H | A | |

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

9.19. TX ABOVE 1 GHz 802.11n BF 2TX MODE IN THE 5.8 GHz BAND

Covered by testing AC20 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

9.20. TX ABOVE 1 GHz 802.11n HT20 BF 3TX MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

| High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber-A | | | | | | | | | | | | | | | | | | | |
|---|-----------------------|-----------------|-------------------|-----------------------|--------------------------------|-----------|--------------|------------------------|----------------|---------------|------------------|------------------------------|--------------|---------------|----------------|--|--|--|--|
| Company: | APPLE | | | | | | | | | | | | | | | | | | |
| Project #: | 12u14745 | | | | | | | | | | | | | | | | | | |
| Date: | 3/17/2013 | | | | | | | | | | | | | | | | | | |
| Test Engineer: | MENGISTU MEKURIA | | | | | | | | | | | | | | | | | | |
| Configuration: | EUT ALONE | | | | | | | | | | | | | | | | | | |
| Mode: | TX, BF 3TX-HT20 MODE | | | | | | | | | | | | | | | | | | |
| Test Equipment: | | | | | | | | | | | | | | | | | | | |
| Horn 1-18GHz | | | | Pre-amplifier 1-26GHz | | | | Pre-amplifier 26-40GHz | | | | Horn > 18GHz | | | | Limit | | | |
| T136; M/N: 3117 @3m | | | | T144 Miteq 3008A00931 | | | | T88 Miteq 26-40GHz | | | | T39; ARA 18-26GHz; S/N:1013 | | | | FCC 15.205 | | | |
| Hi Frequency Cables | | | | | | | | | | | | | | | | | | | |
| 3' cable 22807700 | | | | 12' cable 22807600 | | | | 20' cable 22807500 | | | | HPF | | | | Reject Filter | | | |
| 3' cable 22807700 | | | | 12' cable 22807600 | | | | 20' cable 22807500 | | | | HPF_7.6GHz | | | | Peak Measurements RBW=1MHz ; VBW=3MHz | | | |
| Average Measurements | | | | | | | | | | | | | | | | | | | |
| RBW=1MHz ; VBW=3MHz | | | | | | | | | | | | | | | | | | | |
| Average Det | | | | | | | | | | | | | | | | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) | | | | |
| Low Channel (5745 MHz) | | | | | | | | | | | | | | | | | | | |
| 11.490 | 3.0 | 39.4 | 29.4 | 38.1 | 11.2 | -35.9 | 0.0 | 0.7 | 53.4 | 43.5 | 74 | 54 | -20.6 | -10.5 | H | | | | |
| 11.490 | 3.0 | 37.9 | 27.8 | 38.1 | 11.2 | -35.9 | 0.0 | 0.7 | 51.9 | 41.9 | 74 | 54 | -22.1 | -12.1 | V | | | | |
| Mid Channel (5785 MHz) | | | | | | | | | | | | | | | | | | | |
| 11.570 | 3.0 | 39.5 | 30.5 | 38.1 | 11.2 | -35.8 | 0.0 | 0.7 | 53.7 | 44.7 | 74 | 54 | -20.3 | -9.3 | H | | | | |
| 11.570 | 3.0 | 37.7 | 27.6 | 38.1 | 11.2 | -35.8 | 0.0 | 0.7 | 52.0 | 41.8 | 74 | 54 | -22.0 | -12.2 | V | | | | |
| Hi Channel (5825 MHz) | | | | | | | | | | | | | | | | | | | |
| 11.650 | 3.0 | 42.1 | 31.8 | 38.2 | 11.3 | -35.8 | 0.0 | 0.7 | 56.5 | 46.2 | 74 | 54 | -17.5 | -7.8 | H | | | | |
| 11.650 | 3.0 | 38.4 | 28.4 | 38.2 | 11.3 | -35.8 | 0.0 | 0.7 | 52.7 | 42.7 | 74 | 54 | -21.3 | -11.3 | V | | | | |
| Rev. 01.30.13 | | | | | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | Amp | Preamp Gain | | | | | | Avg Lim | Average Field Strength Limit | | | | | | | |
| Dist | Distance to Antenna | | | D Corr | Distance Correct to 3 meters | | | | | | Pk Lim | Peak Field Strength Limit | | | | | | | |
| Read | Analyzer Reading | | | Avg | Average Field Strength @ 3 m | | | | | | Avg Mar | Margin vs. Average Limit | | | | | | | |
| AF | Antenna Factor | | | Peak | Calculated Peak Field Strength | | | | | | Pk Mar | Margin vs. Peak Limit | | | | | | | |
| CL | Cable Loss | | | HPF | High Pass Filter | | | | | | | | | | | | | | |

9.21. TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.8 GHz BAND

Covered by testing HT40 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

9.22. TX ABOVE 1 GHz 802.11n HT40 2TX MODE IN THE 5.8 GHz BAND

Covered by testing HT40 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at.

9.23. TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 02/27/13
Project #: 12U14745
Company: Apple
Test Target: FCC Class B
Mode Oper: HT40 TX mode

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |

| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|-----------------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| 5755MHz HT40 3TX CDD | | | | | | | | | | | | | |
| 11.510 | 3.0 | 33.5 | 38.9 | 11.2 | -33.0 | 0.0 | 0.7 | 51.3 | 74.0 | -22.7 | H | P | |
| 11.510 | 3.0 | 20.9 | 38.9 | 11.2 | -33.0 | 0.0 | 0.7 | 38.7 | 54.0 | -15.3 | H | A | |
| 5755MHz HT40 3TX CDD | | | | | | | | | | | | | |
| 11.510 | 3.0 | 32.6 | 38.9 | 11.2 | -33.0 | 0.0 | 0.7 | 50.4 | 74.0 | -23.6 | V | P | |
| 11.510 | 3.0 | 19.3 | 38.9 | 11.2 | -33.0 | 0.0 | 0.7 | 37.0 | 54.0 | -17.0 | V | A | |
| 5795MHz HT40 3TX CDD | | | | | | | | | | | | | |
| 11.590 | 3.0 | 33.0 | 39.0 | 11.3 | -33.0 | 0.0 | 0.7 | 51.1 | 74.0 | -22.9 | V | P | |
| 11.590 | 3.0 | 19.8 | 39.0 | 11.3 | -33.0 | 0.0 | 0.7 | 37.9 | 54.0 | -16.1 | V | A | |
| 5795MHz HT40 3TX CDD | | | | | | | | | | | | | |
| 11.590 | 3.0 | 34.8 | 39.0 | 11.3 | -33.0 | 0.0 | 0.7 | 52.8 | 74.0 | -21.2 | H | P | |
| 11.590 | 3.0 | 21.3 | 39.0 | 11.3 | -33.0 | 0.0 | 0.7 | 39.4 | 54.0 | -14.6 | H | A | |

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

9.24. TX ABOVE 1 GHz 802.11n HT40 BF 2TX MODE IN THE 5.8 GHz BAND

Covered by testing AC40 CDD MCS0 3TX, total power across all three chains is higher than the power level the device will operate at

9.25. TX ABOVE 1 GHz 802.11n HT40 BF 3TX MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

| High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber-A | | | | | | | | | | | | | | | | | | | |
|---|-----------------------|-----------------------|--------------------|------------------------|----------|--------------------------------|--------------|------------|----------------|---------------|------------------|-------------------|--------------|------------------------------|---|--|--|--|--|
| Company: | APPLE | | | | | | | | | | | | | | | | | | |
| Project #: | 12u14745 | | | | | | | | | | | | | | | | | | |
| Date: | 3/17/2013 | | | | | | | | | | | | | | | | | | |
| Test Engineer: | MENGISTU MEKURIA | | | | | | | | | | | | | | | | | | |
| Configuration: | EUT ALONE | | | | | | | | | | | | | | | | | | |
| Mode: | TX., BF 3TX | | | | | | | | | | | | | | | | | | |
| Test Equipment: | | | | | | | | | | | | | | | | | | | |
| Horn 1-18GHz | | Pre-amplifier 1-26GHz | | Pre-amplifier 26-40GHz | | Horn > 18GHz | | Limit | | | | | | | | | | | |
| T136; M/N: 3117 @3m | | T144 Miteq 3008A00931 | | T88 Miteq 26-40GHz | | T39; ARA 18-26GHz; S/N:1013 | | FCC 15.205 | | | | | | | | | | | |
| Hi Frequency Cables | | | | | | | | | | | | | | | | | | | |
| 3' cable 22807700 | | | 12' cable 22807600 | | | 20' cable 22807500 | | | HPF | | | Reject Filter | | | Peak Measurements RBW=1MHz ; VBW=3MHz | | | | |
| 3' cable 22807700 | | | 12' cable 22807600 | | | 20' cable 22807500 | | | HPF_7.6GHz | | | Reject Filter | | | Average Measurements RBW=1MHz ; VBW=3MHz | | | | |
| Average Det | | | | | | | | | | | | | | | | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) | | | | |
| Low Channel (5755 MHz) | | | | | | | | | | | | | | | | | | | |
| 11.510 | 3.0 | 37.0 | 26.7 | 38.1 | 11.2 | -35.8 | 0.0 | 0.7 | 51.1 | 40.8 | 74 | 54 | -22.9 | -13.2 | H | | | | |
| 11.510 | 3.0 | 35.8 | 26.2 | 38.1 | 11.2 | -35.8 | 0.0 | 0.7 | 49.9 | 40.3 | 74 | 54 | -24.1 | -13.7 | V | | | | |
| Hi Channel (5795 MHz) | | | | | | | | | | | | | | | | | | | |
| 11.590 | 3.0 | 38.4 | 27.7 | 38.2 | 11.2 | -35.8 | 0.0 | 0.7 | 52.6 | 41.9 | 74 | 54 | -21.4 | -12.1 | H | | | | |
| 11.590 | 3.0 | 35.7 | 26.0 | 38.2 | 11.2 | -35.8 | 0.0 | 0.7 | 50.0 | 40.3 | 74 | 54 | -24.0 | -13.7 | V | | | | |
| Rev. 01.30.13 | | | | | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | | Amp | Preamp Gain | | | | Avg Lim | | | | Average Field Strength Limit | | | | | |
| Dist | Distance to Antenna | | | | D Corr | Distance Correct to 3 meters | | | | Pk Lim | | | | Peak Field Strength Limit | | | | | |
| Read | Analyzer Reading | | | | Avg | Average Field Strength @ 3 m | | | | Avg Mar | | | | Margin vs. Average Limit | | | | | |
| AF | Antenna Factor | | | | Peak | Calculated Peak Field Strength | | | | Pk Mar | | | | Margin vs. Peak Limit | | | | | |
| CL | Cable Loss | | | | HPF | | | | | | | | | | | | | | |

9.26. TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.8 GHz BAND

Covered by testing AC80 3TX, total power across all three chains is higher than the power level the device will operate at.

9.27. TX ABOVE 1 GHz 802.11ac VHT80 2TX MODE IN THE 5.8 GHz BAND

Covered by testing AC80 3TX, total power across all three chains is higher than the power level the device will operate at.

9.28. TX ABOVE 1 GHz 802.11ac VHT80 CDD 3TX MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 02/19/13
Project #: 12U14745
Company: Apple
Test Target: FCC Class B
Mode Oper: HT80 TX mode

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |

| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol. V/H | Det. P/A/QP | Notes |
|-----------------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| 5775MHz HT80 3TX CDD | | | | | | | | | | | | | |
| 11.550 | 3.0 | 33.1 | 38.9 | 11.3 | -33.0 | 0.0 | 0.7 | 51.0 | 74.0 | -23.0 | H | P | |
| 11.550 | 3.0 | 20.2 | 38.9 | 11.3 | -33.0 | 0.0 | 0.7 | 38.1 | 54.0 | -15.9 | H | A | |
| 5775MHz HT80 3TX CDD | | | | | | | | | | | | | |
| 11.550 | 3.0 | 32.1 | 38.9 | 11.3 | -33.0 | 0.0 | 0.7 | 50.0 | 74.0 | -24.0 | V | P | |
| 11.550 | 3.0 | 21.9 | 38.9 | 11.3 | -33.0 | 0.0 | 0.7 | 39.8 | 54.0 | -14.2 | V | A | |

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

9.29. TX ABOVE 1 GHz 802.11ac VHT80 BF 2TX MODE IN THE 5.8 GHz BAND

Covered by testing AC80 BF 3TX, total power across all three chains is higher than the power level the device will operate at.


9.30. TX ABOVE 1 GHz 802.11ac VHT80 BF 3TX MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS


| High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber-A | | | | | | | | | | | | | | | | | | | |
|---|-----------------------|-----------------------|--------------------|------------------------|--------------------------------|-----------------------------|--------------|------------|----------------|---------------|------------------|------------------------------|--------------|---------------|---|--|--|--|--|
| Company: | APPLE | | | | | | | | | | | | | | | | | | |
| Project #: | 12u14745 | | | | | | | | | | | | | | | | | | |
| Date: | 3/17/2013 | | | | | | | | | | | | | | | | | | |
| Test Engineer: | MENGISTU MEKURIA | | | | | | | | | | | | | | | | | | |
| Configuration: | EUT ALONE | | | | | | | | | | | | | | | | | | |
| Mode: | TX., BF 3TX-HT80 | | | | | | | | | | | | | | | | | | |
| Test Equipment: | | | | | | | | | | | | | | | | | | | |
| Horn 1-18GHz | | Pre-amplifier 1-26GHz | | Pre-amplifier 26-40GHz | | Horn > 18GHz | | Limit | | | | | | | | | | | |
| T136; M/N: 3117 @3m | | T144 Miteq 3008A00931 | | T88 Miteq 26-40GHz | | T39; ARA 18-26GHz; S/N:1013 | | FCC 15.205 | | | | | | | | | | | |
| Hi Frequency Cables | | | | | | | | | | | | | | | | | | | |
| 3' cable 22807700 | | | 12' cable 22807600 | | | 20' cable 22807500 | | | HPF | | | Reject Filter | | | Peak Measurements RBW=1MHz ; VBW=3MHz | | | | |
| 3' cable 22807700 | | | 12' cable 22807600 | | | 20' cable 22807500 | | | HPF_7.6GHz | | | Reject Filter | | | Average Measurements RBW=1MHz ; VBW=3MHz | | | | |
| Average det | | | | | | | | | | | | | | | | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) | | | | |
| Mid Channel (5775 MHz) | | | | | | | | | | | | | | | | | | | |
| 11.550 | 3.0 | 35.1 | 26.1 | 38.1 | 11.2 | -35.8 | 0.0 | 0.7 | 49.3 | 40.3 | 74 | 54 | -24.7 | -13.7 | H | | | | |
| 11.550 | 3.0 | 35.4 | 25.6 | 38.1 | 11.2 | -35.8 | 0.0 | 0.7 | 49.6 | 39.8 | 74 | 54 | -24.4 | -14.2 | V | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| Rev. 01.30.13 | | | | | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | Amp | Preamp Gain | | | | | | Avg Lim | Average Field Strength Limit | | | | | | | |
| Dist | Distance to Antenna | | | D Corr | Distance Correct to 3 meters | | | | | | Pk Lim | Peak Field Strength Limit | | | | | | | |
| Read | Analyzer Reading | | | Avg | Average Field Strength @ 3 m | | | | | | Avg Mar | Margin vs. Average Limit | | | | | | | |
| AF | Antenna Factor | | | Peak | Calculated Peak Field Strength | | | | | | Pk Mar | Margin vs. Peak Limit | | | | | | | |
| CL | Cable Loss | | | HPF | High Pass Filter | | | | | | | | | | | | | | |

9.31. WORST-CASE BELOW 1 GHz (2.4 GHz BAND)

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

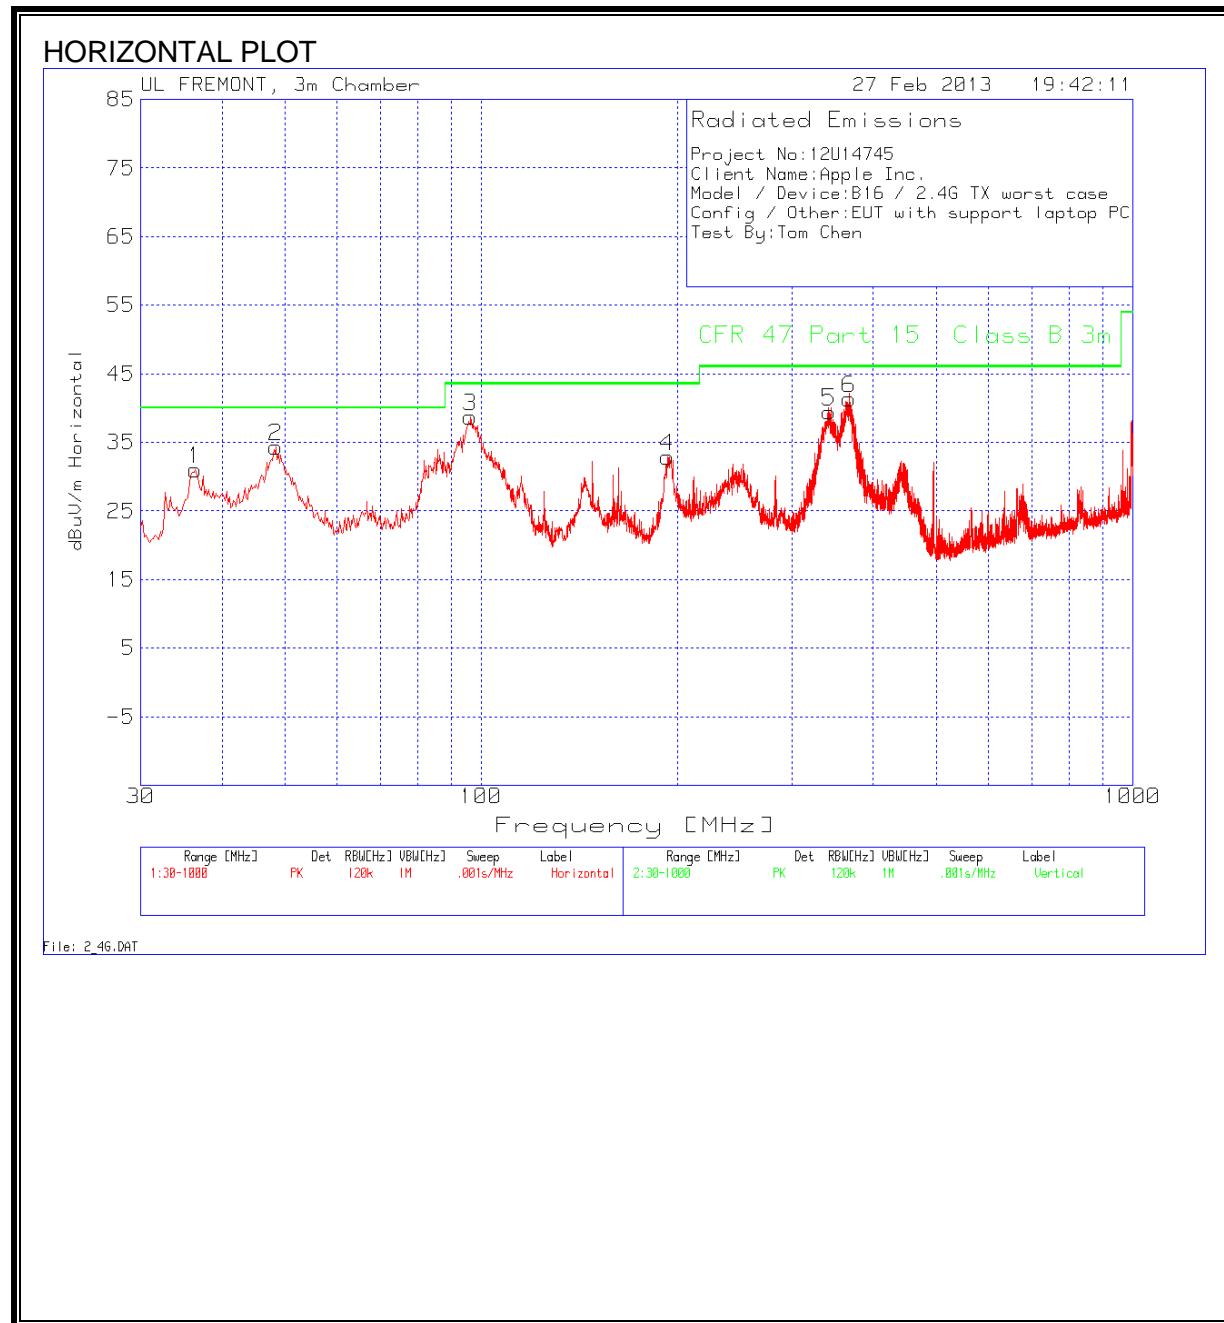

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

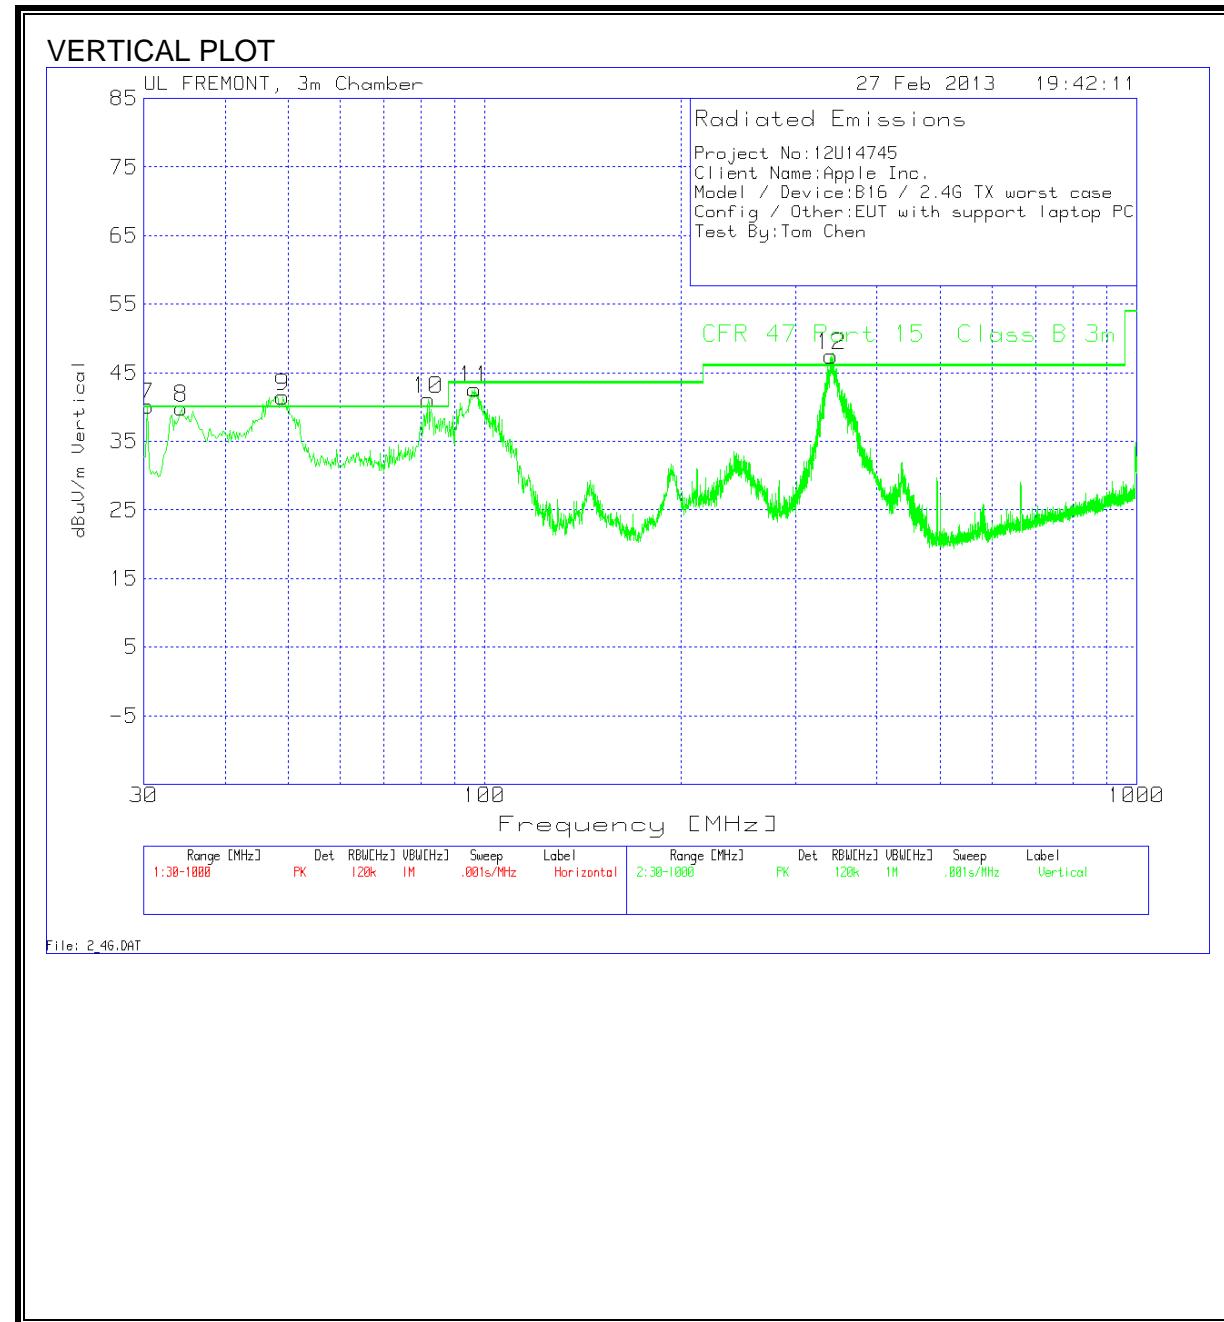

HORIZONTAL AND VERTICAL DATA

Project No:12U14745

Client Name:Apple Inc.

Model / Device:B16 / 2.4G TX worst case

Config / Other:EUT with support laptop PC

Test By:Tom Chen

Horizontal 30 - 1000MHz


| Marker No. | Test Frequency | Meter Reading | Detector | T130 8-14-12 (dB) | 3m Loop (dB) | dBuV/m | CFR 47 Part 15 Class B 3m | Margin | Polarity |
|------------|----------------|---------------|----------|-------------------|--------------|--------|---------------------------|--------|----------|
| 1 | 36.3969 | 42.11 | PK | 16.3 | -27.4 | 31.01 | 40 | -8.99 | Horz |
| 2 | 48.4153 | 53.55 | PK | 8.1 | -27.3 | 34.35 | 40 | -5.65 | Horz |
| 3 | 96.295 | 56.29 | PK | 9.2 | -26.8 | 38.69 | 43.5 | -4.81 | Horz |
| 4 | 193.2174 | 47.2 | PK | 11.7 | -26 | 32.9 | 43.5 | -10.6 | Horz |
| 5 | 342.478 | 50.64 | PK | 14.1 | -25.3 | 39.44 | 46 | -6.56 | Horz |
| 6 | 367.2902 | 51.95 | PK | 14.9 | -25.5 | 41.35 | 46 | -4.65 | Horz |

Vertical 30 - 1000MHz


| Marker No. | Test Frequency | Meter Reading | Detector | T130 8-14-12 (dB) | 3m Loop (dB) | dBuV/m | CFR 47 Part 15 Class B 3m | Margin | Polarity |
|------------|----------------|---------------|----------|-------------------|--------------|--------|---------------------------|--------|----------|
| 7 | 30.8 | 34.57 | QP | 20.3 | -27.5 | 27.37 | 40 | -12.63 | Vert |
| 8 | 33.9802 | 44.23 | QP | 18 | -27.5 | 34.73 | 40 | -5.27 | Vert |
| 9 | 48.8976 | 56.45 | QP | 7.9 | -27.3 | 37.05 | 40 | -2.95 | Vert |
| 10 | 81.8909 | 52.65 | QP | 7.3 | -27 | 32.95 | 40 | -7.05 | Vert |
| 11 | 96.017 | 55.88 | QP | 9.1 | -26.8 | 38.18 | 43.5 | -5.32 | Vert |
| 12 | 340.346 | 53.57 | QP | 14 | -25.3 | 42.27 | 46 | -3.73 | Vert |

9.32. BAND WORST-CASE BELOW 1 GHz (5 GHz BANDS)

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

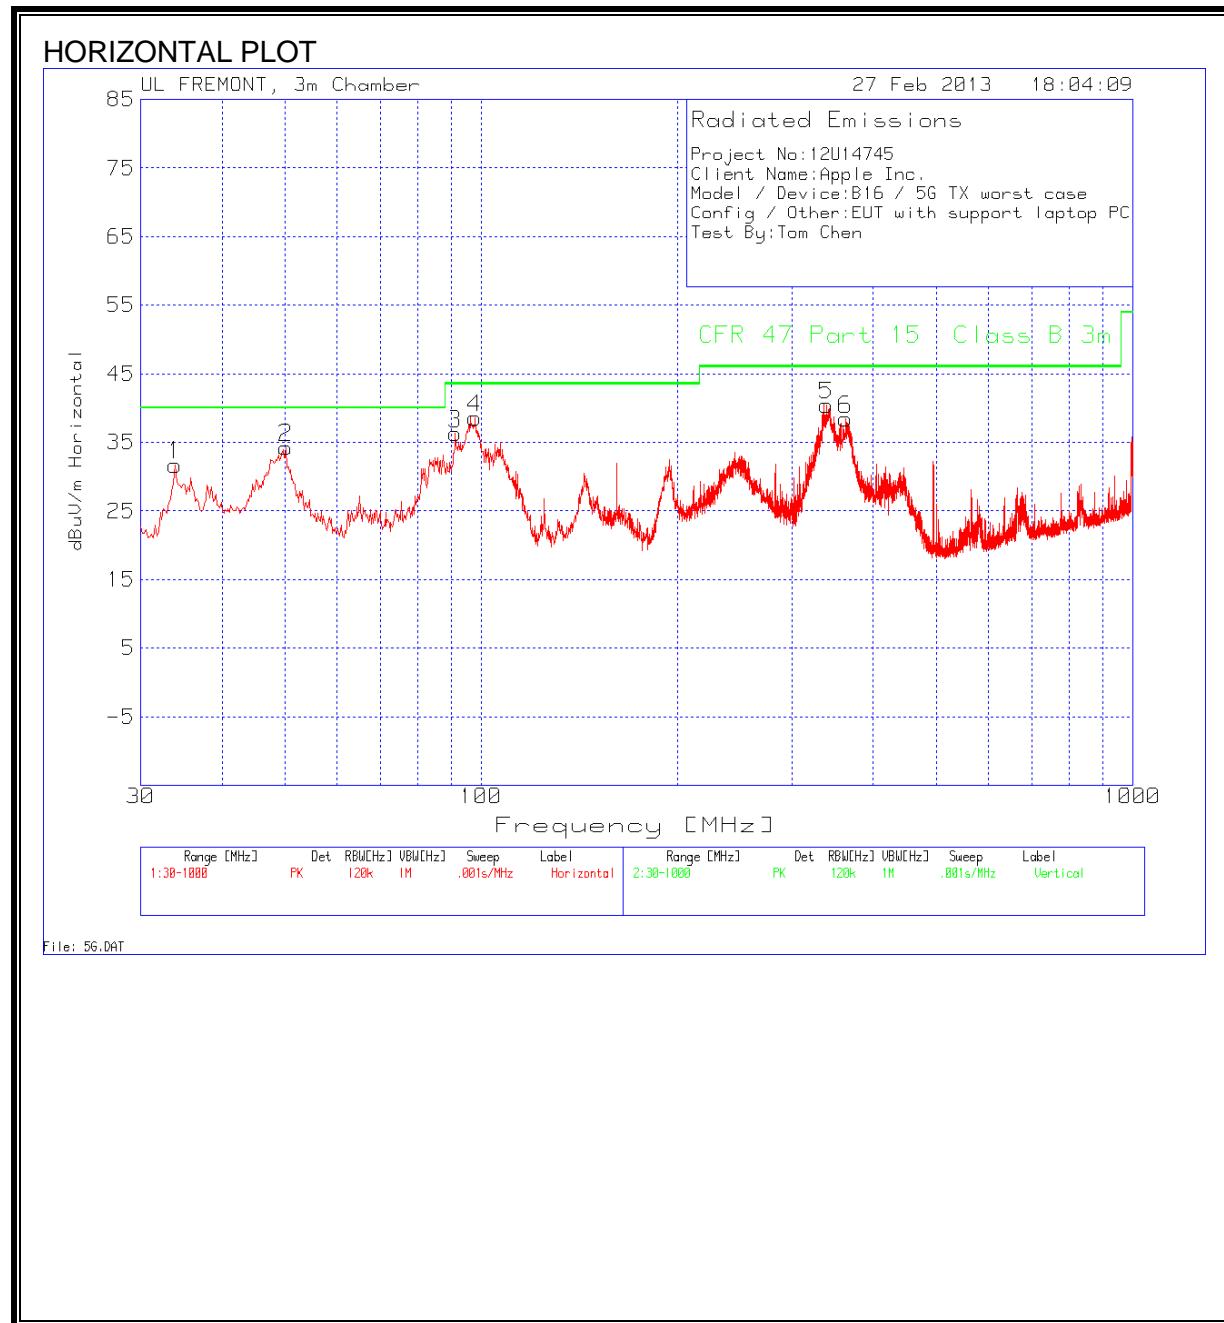

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

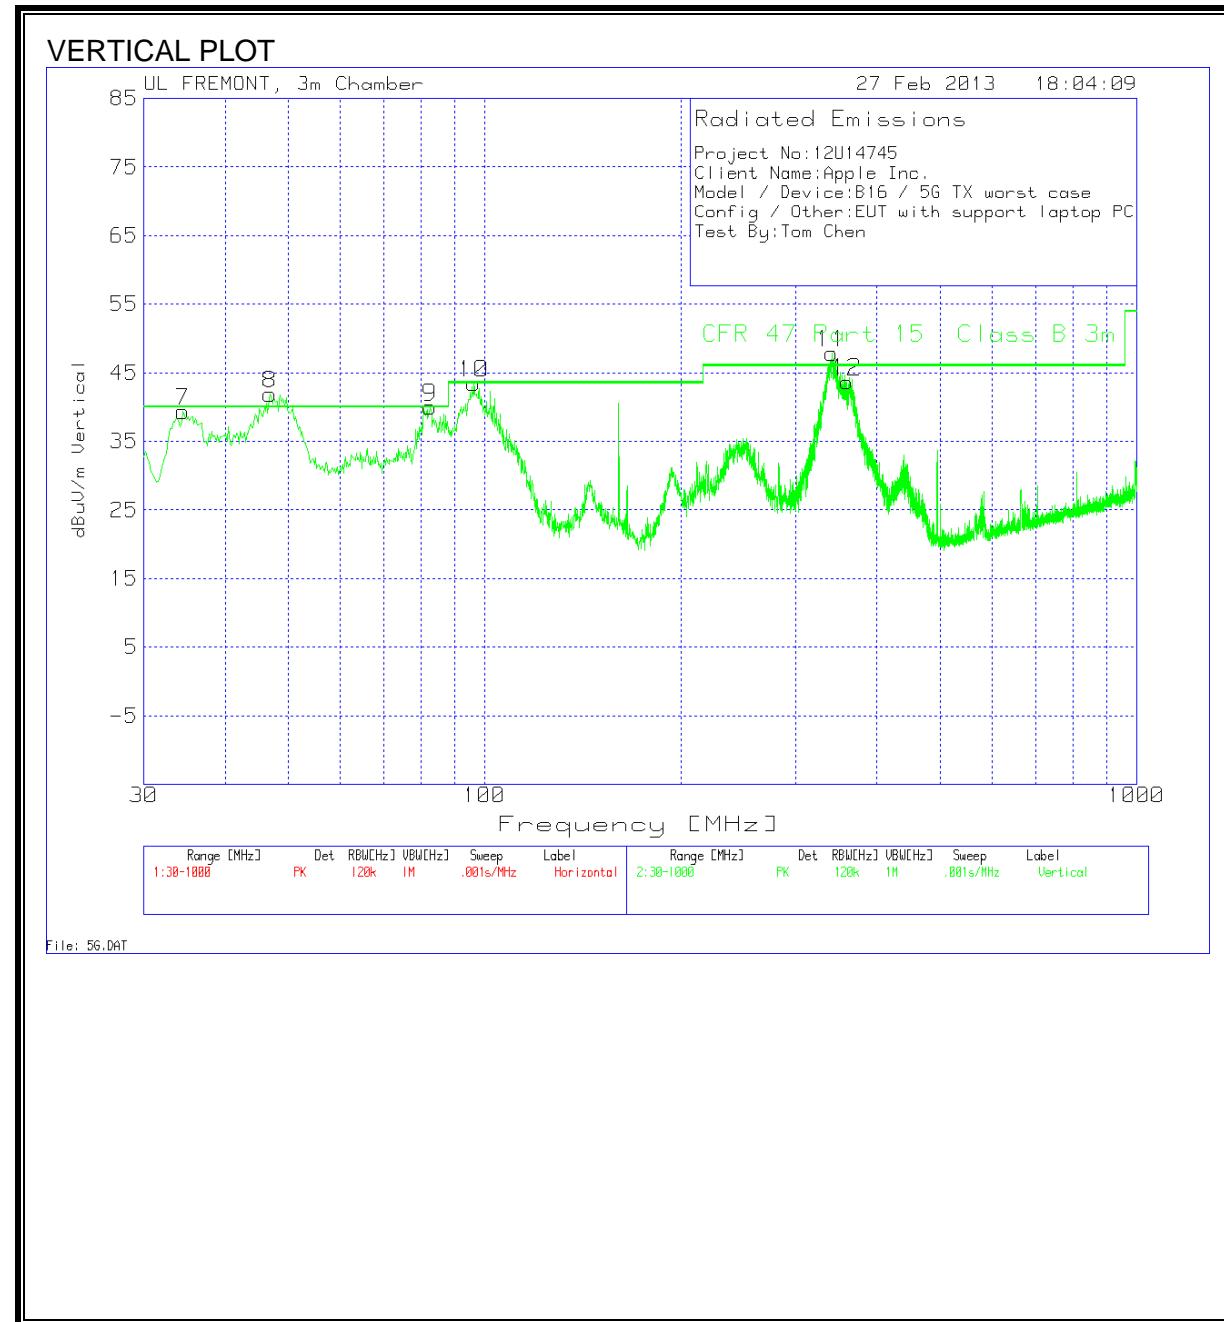

HORIZONTAL AND VERTICAL DATA

Project No:12U14745

Client Name:Apple Inc.

Model / Device:B16 / 5G TX worst case

Config / Other:EUT with support laptop PC

Test By:Tom Chen

Horizontal 30 - 1000MHz

| Marker No. | Test Frequency | Meter Reading | Detector | T130 8-14-12 (dB) | 3m Loop (dB) | dBuV/m | CFR 47 Part 15 Class B 3m | Margin | Polarity |
|------------|----------------|---------------|----------|-------------------|--------------|--------|---------------------------|--------|----------|
| 1 | 33.8769 | 41.12 | PK | 18.1 | -27.5 | 31.72 | 40 | -8.28 | Horz |
| 2 | 50.1599 | 54.15 | PK | 7.4 | -27.3 | 34.25 | 40 | -5.75 | Horz |
| 3 | 91.255 | 55.28 | PK | 7.9 | -26.9 | 36.28 | 43.5 | -7.22 | Horz |
| 4 | 97.8457 | 55.75 | PK | 9.6 | -26.8 | 38.55 | 43.5 | -4.95 | Horz |
| 5 | 338.9888 | 51.75 | PK | 14 | -25.3 | 40.45 | 46 | -5.55 | Horz |
| 6 | 362.8317 | 49 | PK | 14.8 | -25.4 | 38.4 | 46 | -7.6 | Horz |

Vertical 30 - 1000MHz

| Marker No. | Test Frequency | Meter Reading | Detector | T130 8-14-12 (dB) | 3m Loop (dB) | dBuV/m | CFR 47 Part 15 Class B 3m | Margin | Polarity |
|------------|----------------|---------------|----------|-------------------|--------------|--------|---------------------------|--------|----------|
| 7 | 34.9151 | 39.72 | QP | 17.4 | -27.5 | 29.62 | 40 | -10.38 | Vert |
| 8 | 48.201 | 27.07 | QP | 8.2 | -27.3 | 7.97 | 40 | -32.03 | Vert |
| 9 | 82.966 | 53.87 | QP | 7.2 | -27 | 34.07 | 40 | -5.93 | Vert |
| 10 | 95.473 | 51.22 | QP | 8.9 | -26.8 | 33.32 | 43.5 | -10.18 | Vert |
| 11 | 340.97 | 23.59 | QP | 14 | -25.3 | 12.29 | 46 | -33.71 | Vert |
| 12 | 359.4594 | 53.31 | QP | 14.7 | -25.4 | 42.61 | 46 | -3.39 | Vert |

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|-----------------------------|------------------------|----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 | 56 to 46 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS FOR 2.4G BAND

| | | | | | | | | | | | |
|---|--|--|--|--|--|--|--|--|--|--|--|
| Project No:12U14745 | | | | | | | | | | | |
| Client Name:Apple Inc. | | | | | | | | | | | |
| Model/Device:B16 / 3x3 Base Station /2.4G | | | | | | | | | | | |
| Test Volt/Freq:120 VAC/60 Hz, TX Worst Case | | | | | | | | | | | |
| Test By:Tom Chen | | | | | | | | | | | |
| | | | | | | | | | | | |


Line-L1 .15 - 30MHz

| Marker No. | Test Frequency | Meter Reading | Detector | T24 IL L1.TXT | LC Cables 1&3.TXT | dB(uVolts) | CFR 47 Part 15 Class B QP | Margin | CFR 47 Part 15 Class B Avg | Margin |
|------------|----------------|---------------|----------|---------------|-------------------|------------|---------------------------|--------|----------------------------|--------|
| 1 | 0.159 | 47.05 | PK | 0.1 | 0 | 47.15 | 65.5 | -18.35 | 55.5 | -8.35 |
| 2 | 0.159 | 31.3 | Av | 0.1 | 0 | 31.4 | 65.5 | -34.1 | 55.5 | -24.1 |
| 3 | 0.4065 | 33.99 | PK | 0.1 | 0 | 34.09 | 57.7 | -23.61 | 47.7 | -13.61 |
| 4 | 0.4065 | 23.56 | Av | 0.1 | 0 | 23.66 | 57.7 | -34.04 | 47.7 | -24.04 |
| 5 | 7.737 | 38.96 | PK | 0.1 | 0.1 | 39.16 | 60 | -20.84 | 50 | -10.84 |
| 6 | 7.737 | 25.19 | Av | 0.1 | 0.1 | 25.39 | 60 | -34.61 | 50 | -24.61 |


Line-L2 .15 - 30MHz

| Marker No. | Test Frequency | Meter Reading | Detector | T24 IL L2.TXT | LC Cables 2&3.TXT | dB(uVolts) | CFR 47 Part 15 Class B QP | Margin | CFR 47 Part 15 Class B Avg | Margin |
|------------|----------------|---------------|----------|---------------|-------------------|------------|---------------------------|--------|----------------------------|--------|
| 7 | 0.1815 | 43.86 | PK | 0.1 | 0 | 43.96 | 64.4 | -20.44 | 54.4 | -10.44 |
| 8 | 0.1815 | 28.33 | Av | 0.1 | 0 | 28.43 | 64.4 | -35.97 | 54.4 | -25.97 |
| 9 | 0.411 | 30.86 | PK | 0.1 | 0 | 30.96 | 57.6 | -26.64 | 47.6 | -16.64 |
| 10 | 0.411 | 18.85 | Av | 0.1 | 0 | 18.95 | 57.6 | -38.65 | 47.6 | -28.65 |
| 11 | 7.8225 | 35.33 | PK | 0.1 | 0.1 | 35.53 | 60 | -24.47 | 50 | -14.47 |
| 12 | 7.8225 | 20.93 | Av | 0.1 | 0.1 | 21.13 | 60 | -38.87 | 50 | -28.87 |

LINE 1 RESULTS

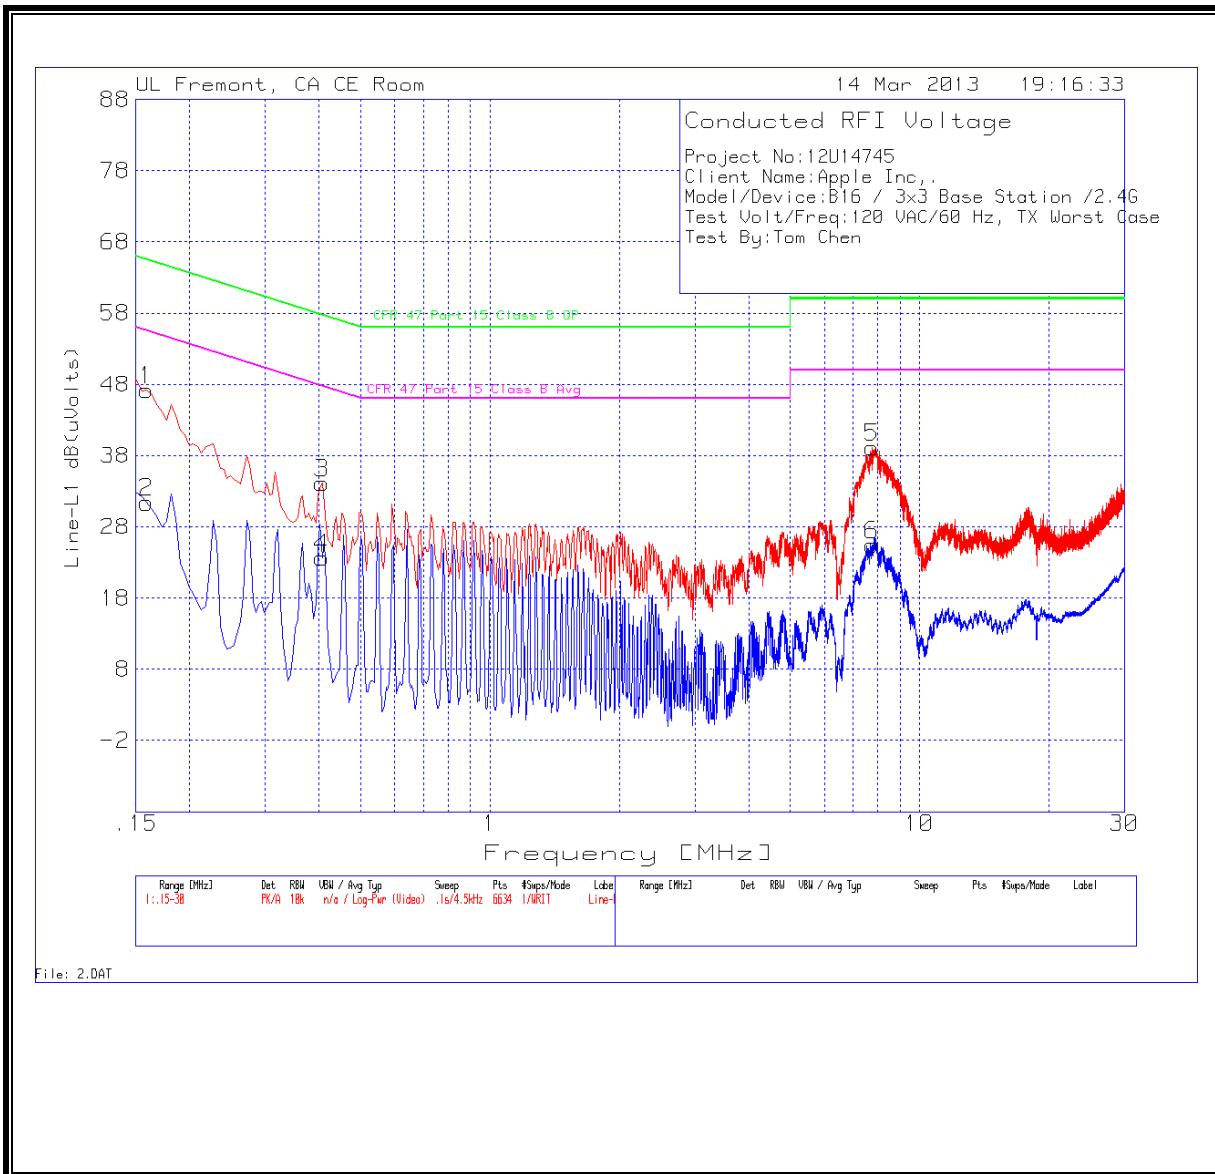

LINE 2 RESULTS

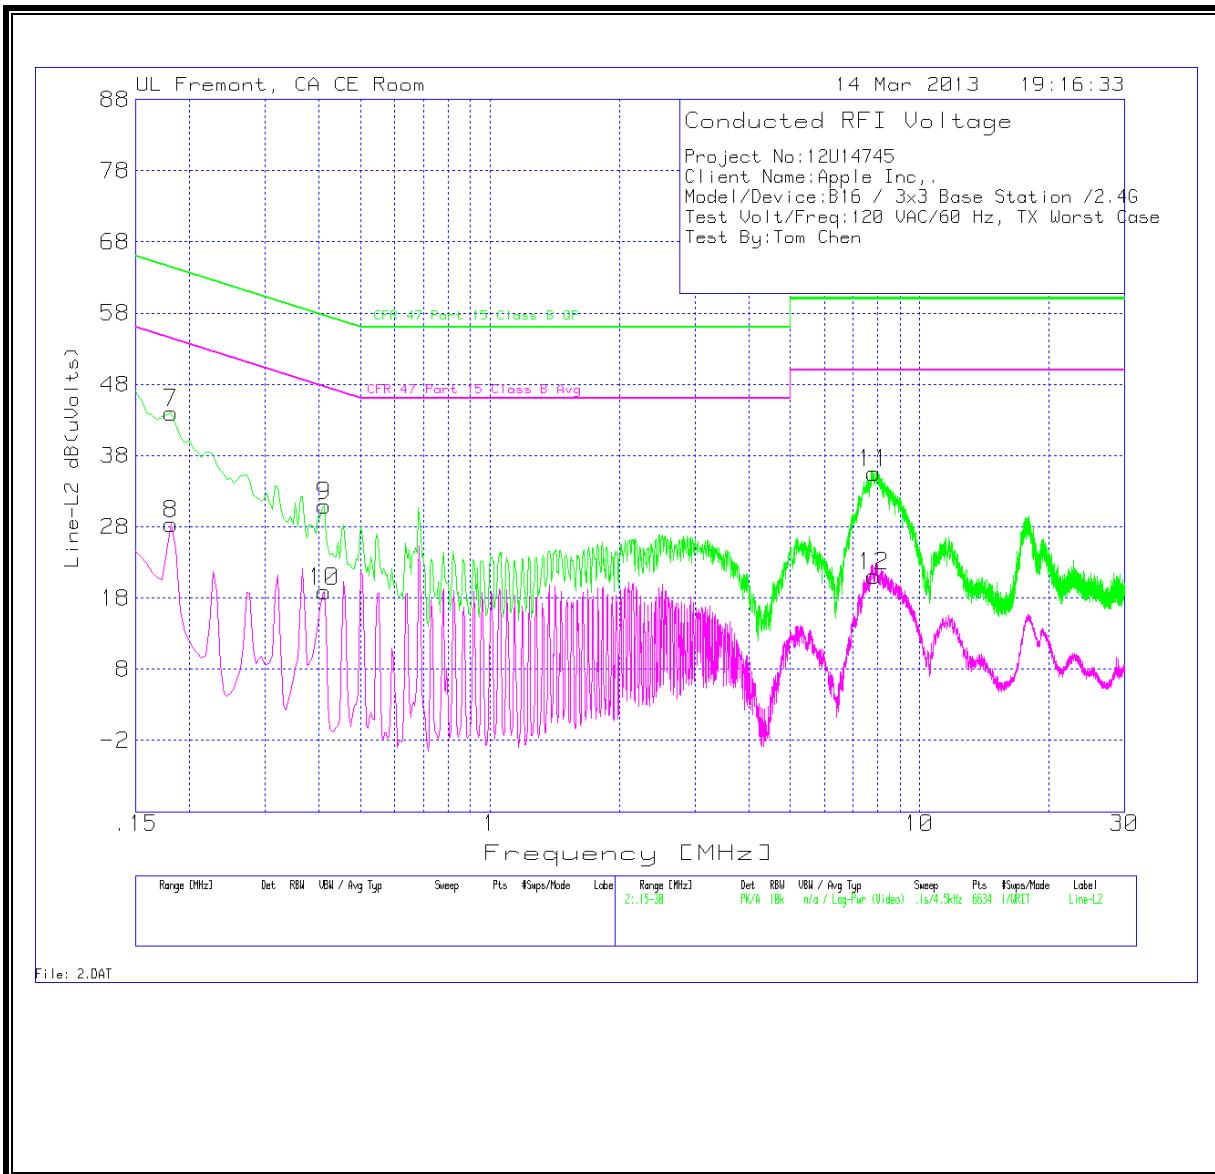

6 WORST EMISSIONS FOR 5.8G BAND

| | | | | | | | | | | | |
|---|--|--|--|--|--|--|--|--|--|--|--|
| Project No:12U14745 | | | | | | | | | | | |
| Client Name:Apple Inc., | | | | | | | | | | | |
| Model/Device:B16 / 3x3 Base Station /5G | | | | | | | | | | | |
| Test Volt/Freq:120 VAC/60 Hz, TX Worst Case | | | | | | | | | | | |
| Test By:Tom Chen | | | | | | | | | | | |
| | | | | | | | | | | | |


Line-L1 .15 - 30MHz

| Marker No. | Test Frequency | Meter Reading | Detector | T24 IL L1.TXT | LC Cables 1&3.TXT | dB(uVolts) | CFR 47 Part 15 Class B QP | Margin | CFR 47 Part 15 Class B Avg | Margin |
|------------|----------------|---------------|----------|---------------|-------------------|------------|---------------------------|--------|----------------------------|--------|
| 1 | 0.159 | 46.19 | PK | 0.1 | 0 | 46.29 | 65.5 | -19.21 | 55.5 | -9.21 |
| 2 | 0.159 | 32.67 | Av | 0.1 | 0 | 32.77 | 65.5 | -32.73 | 55.5 | -22.73 |
| 3 | 0.402 | 32.5 | PK | 0.1 | 0 | 32.6 | 57.8 | -25.2 | 47.8 | -15.2 |
| 4 | 0.402 | 28.48 | Av | 0.1 | 0 | 28.58 | 57.8 | -29.22 | 47.8 | -19.22 |
| 5 | 7.71 | 37.82 | PK | 0.1 | 0.1 | 38.02 | 60 | -21.98 | 50 | -11.98 |
| 6 | 7.71 | 26.15 | Av | 0.1 | 0.1 | 26.35 | 60 | -33.65 | 50 | -23.65 |

Line-L2 .15 - 30MHz

| Marker No. | Test Frequency | Meter Reading | Detector | T24 IL L2.TXT | LC Cables 2&3.TXT | dB(uVolts) | CFR 47 Part 15 Class B QP | Margin | CFR 47 Part 15 Class B Avg | Margin |
|------------|----------------|---------------|----------|---------------|-------------------|------------|---------------------------|--------|----------------------------|--------|
| 7 | 0.159 | 45.11 | PK | 0.1 | 0 | 45.21 | 65.5 | -20.29 | 55.5 | -10.29 |
| 8 | 0.159 | 24.45 | Av | 0.1 | 0 | 24.55 | 65.5 | -40.95 | 55.5 | -30.95 |
| 9 | 0.3795 | 30.14 | PK | 0.1 | 0 | 30.24 | 58.3 | -28.06 | 48.3 | -18.06 |
| 10 | 0.3795 | 19.04 | Av | 0.1 | 0 | 19.14 | 58.3 | -39.16 | 48.3 | -29.16 |
| 11 | 7.863 | 35.41 | PK | 0.1 | 0.1 | 35.61 | 60 | -24.39 | 50 | -14.39 |
| 12 | 7.863 | 22.68 | Av | 0.1 | 0.1 | 22.88 | 60 | -37.12 | 50 | -27.12 |

LINE 1 RESULTS

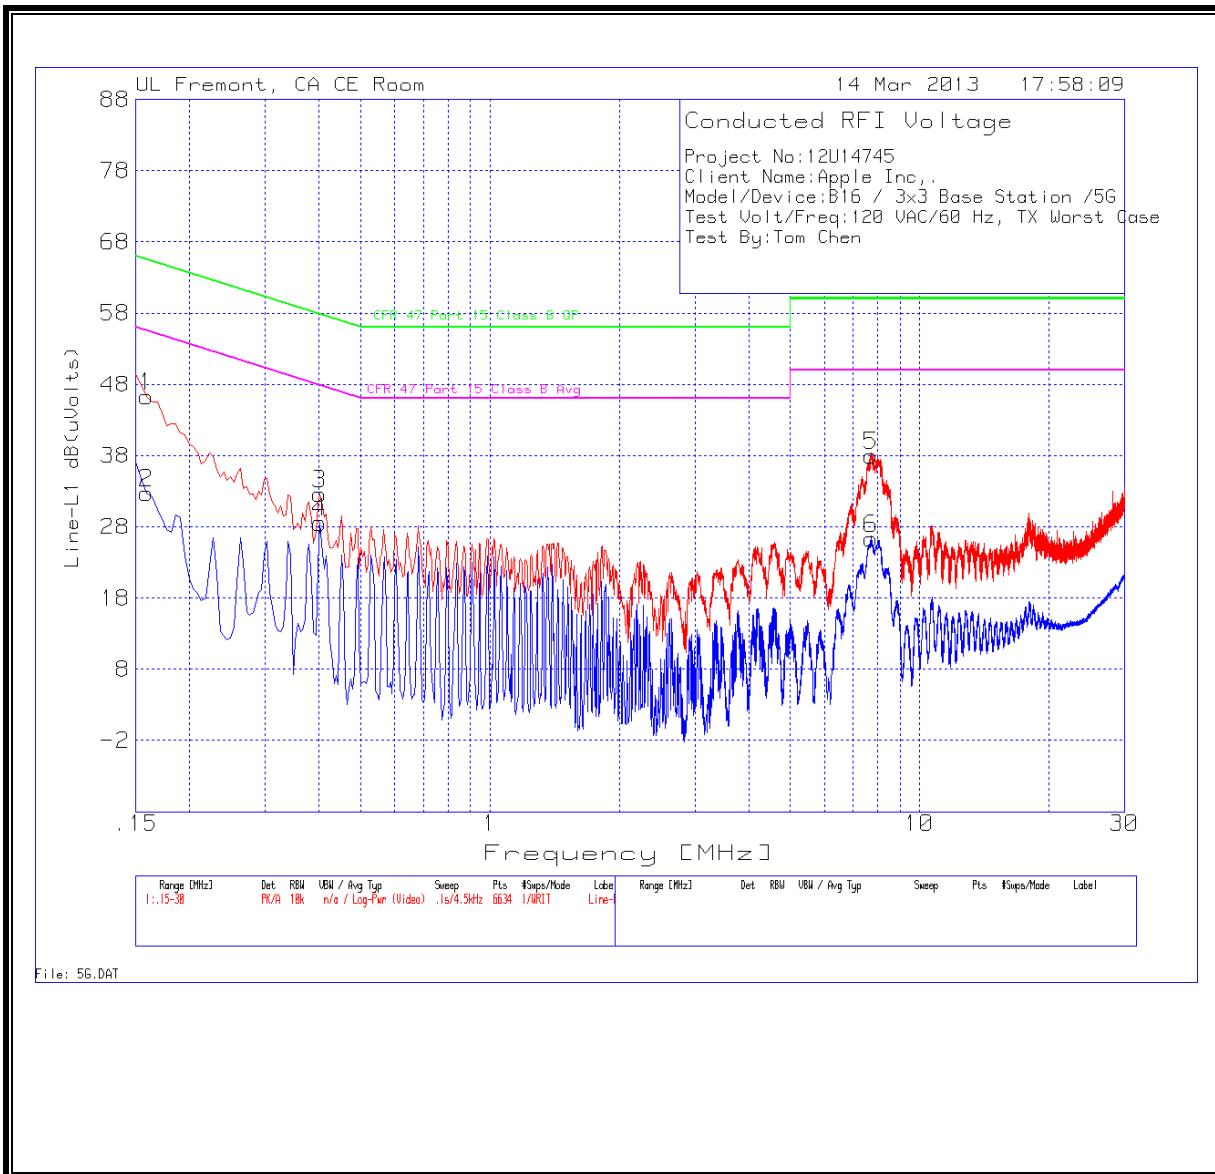

LINE 2 RESULTS

