



**99% BANDWIDTH, Chain 0**

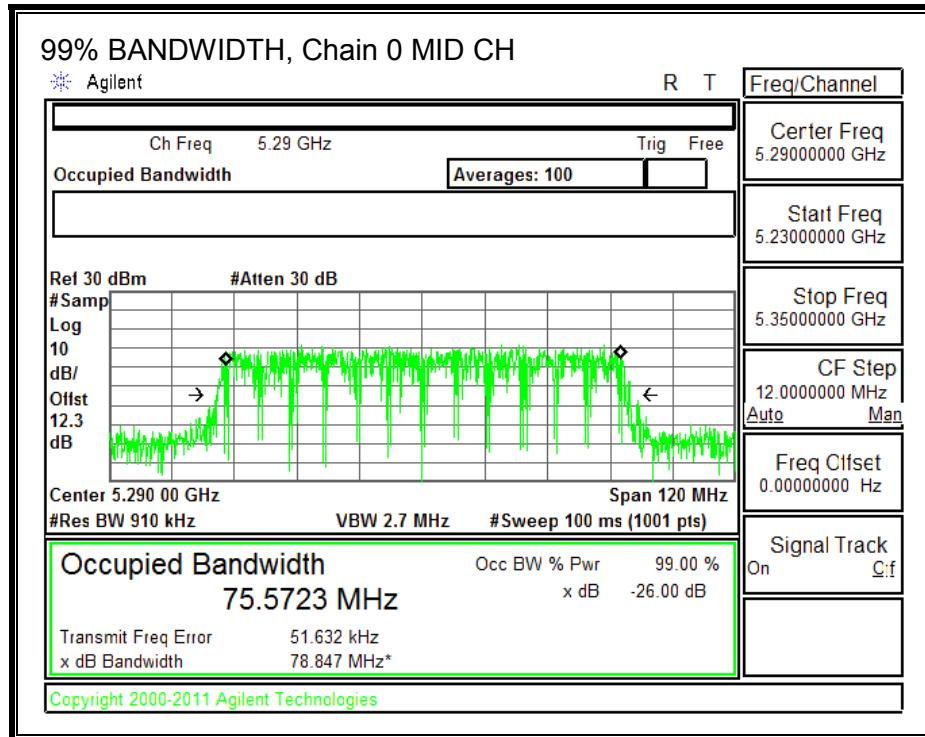

**99% BANDWIDTH, Chain 1**

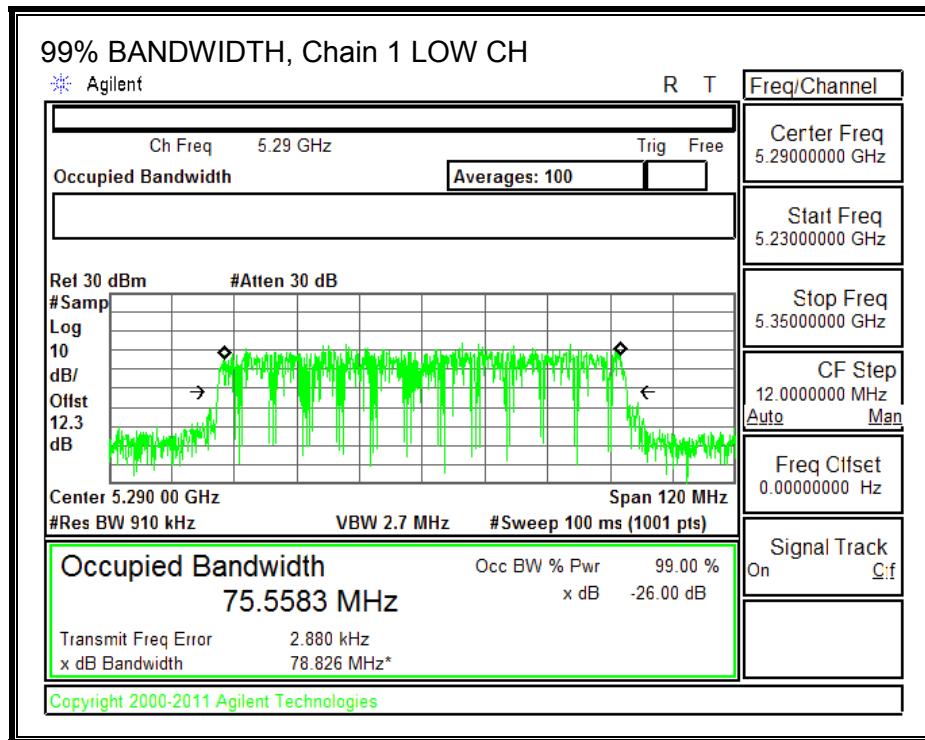

### 9.23.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
3.05	3.33	3.19

## RESULTS

### Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	82.20	3.19	3.19	24.00	11.00

Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	9.19	9.27	12.46	24.00	-11.54


### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	-7.70	-6.92	-4.06	11.00	-15.06

**PSD, Chain 0**

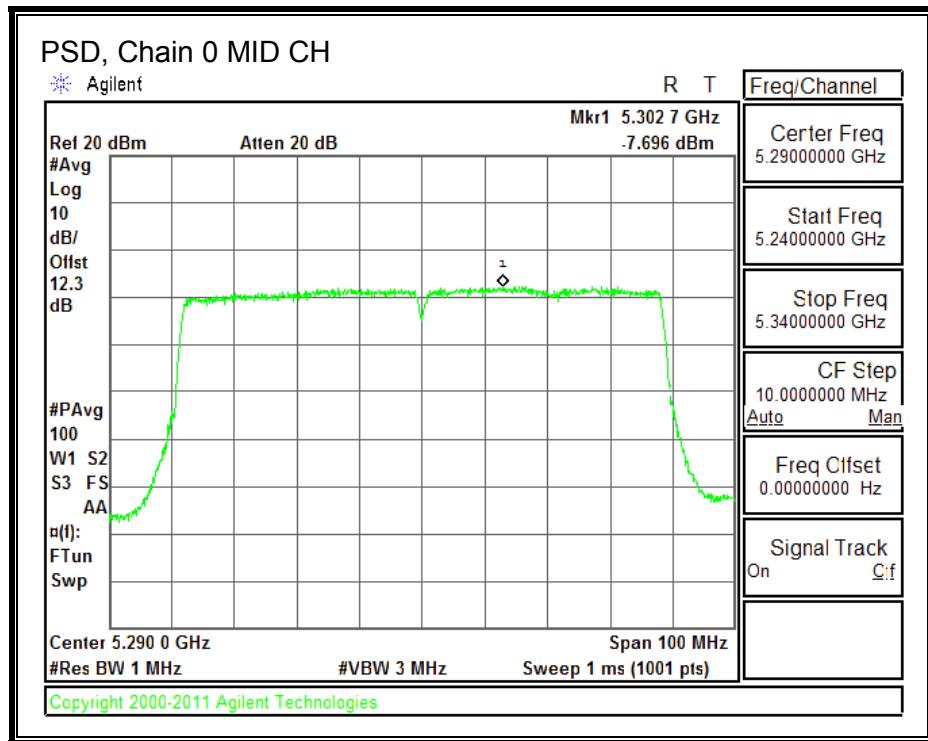

**PSD, Chain 1**

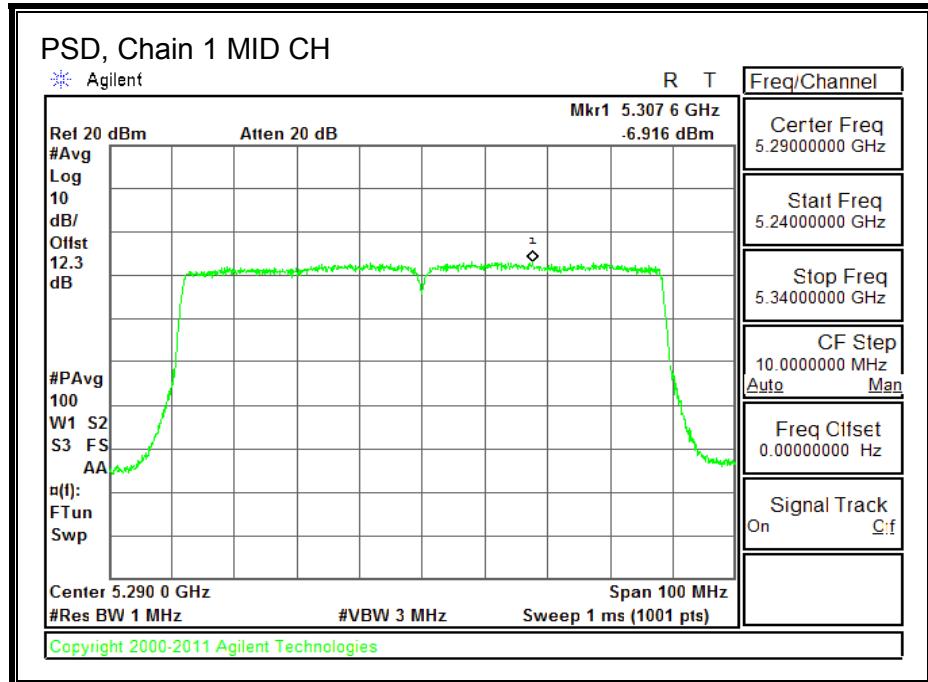

## 9.24. 802.11ac VHT80 2TX BF IN THE 5.3 GHz BAND

Refer to Section 9.22, 802.11ac 80MHz 2TX CDD MODE IN THE 5.3 GHz BAND

The power per chain used for 802.11ac 80MHz 2TX CDD IN THE 5.3 GHz mode is the same power per chain that will be for 802.11ac 80MHz 2TX BF IN THE 5.3 GHz mode. However, since BF is correlated and CDD is uncorrelated for output power, the section below for output power using correlated antenna gain for this mode shows it is still compliant.

### 9.24.1. OUTPUT POWER

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
3.05	3.33	6.20

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Mid	5290	82.08	6.20	23.80

Duty Cycle CF (dB)	0.26	Included in Calculations of Corr'd Power
--------------------	------	--

### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	9.20	9.28	12.51	23.80	-11.29

## 9.25. 802.11a & 802.11ac 1TX MODE IN THE 5.6 GHz BAND

### 9.25.1. 26 dB BANDWIDTH



#### LIMITS



None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	21.72
Mid	5600	21.75
High	5700	21.66
144	5720	21.81

**26 dB BANDWIDTH**

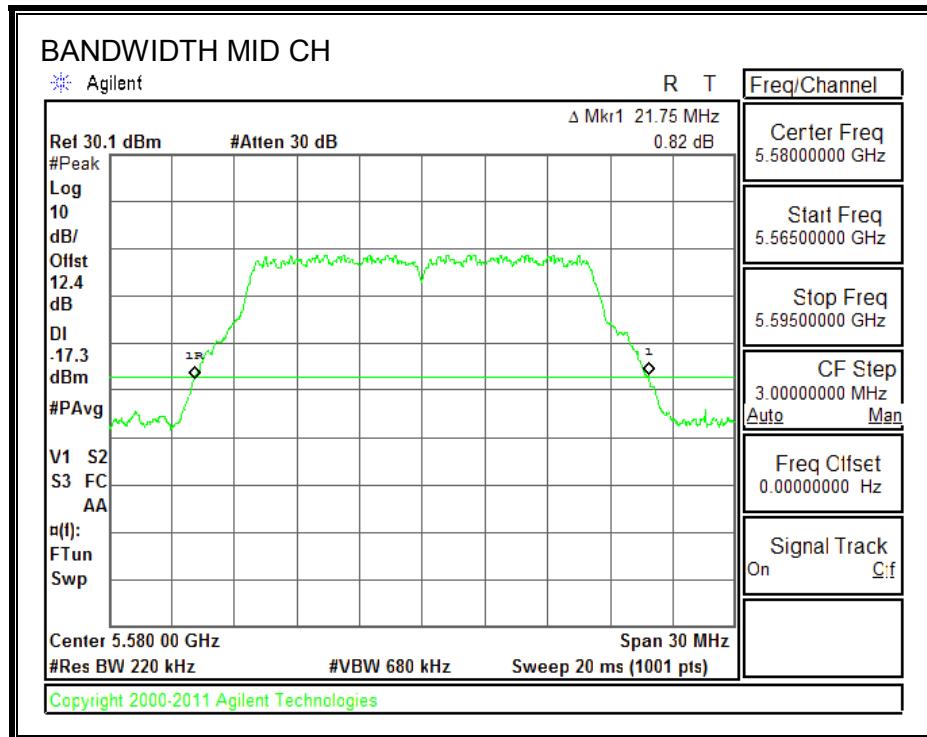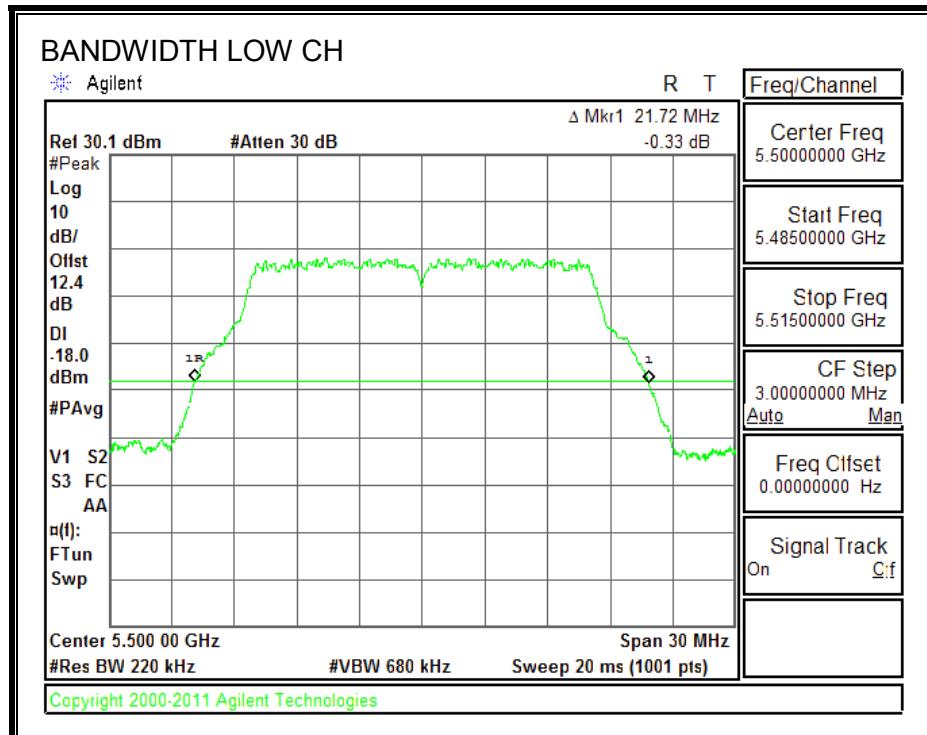

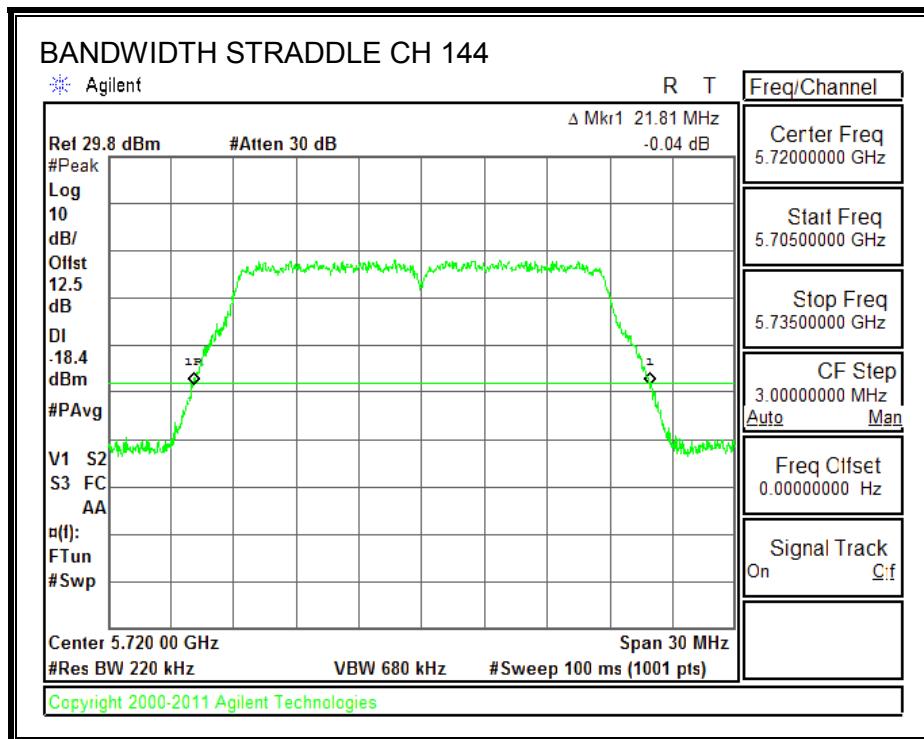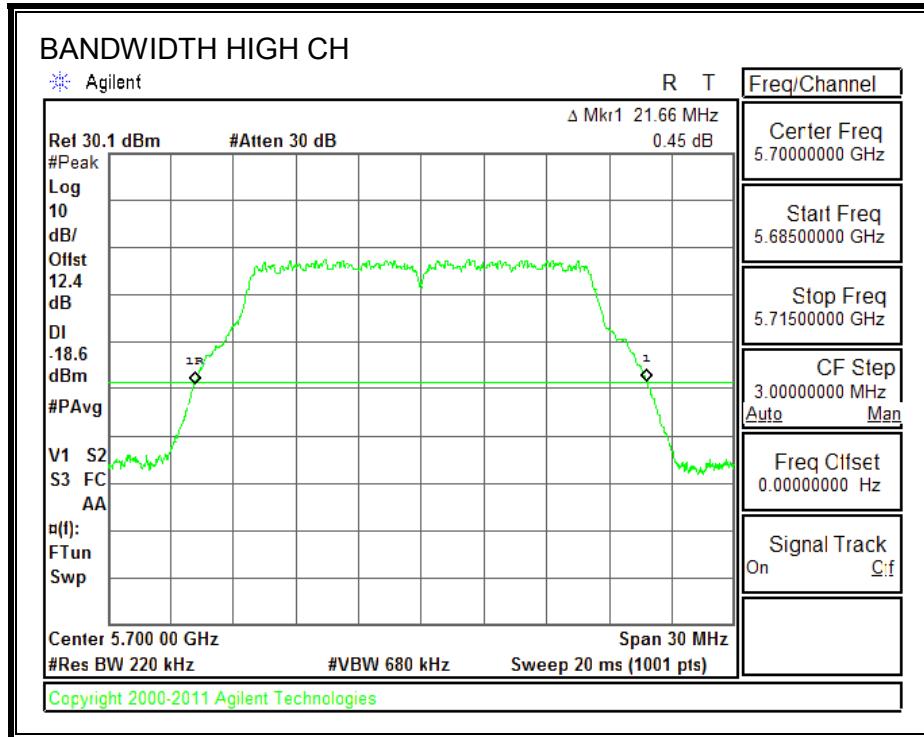

## 9.25.2. 99% BANDWIDTH



### LIMITS



None; for reporting purposes only.

### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	16.4953
Mid	5600	16.5020
High	5700	16.4974
144	5720	17.7072

**99% BANDWIDTH**

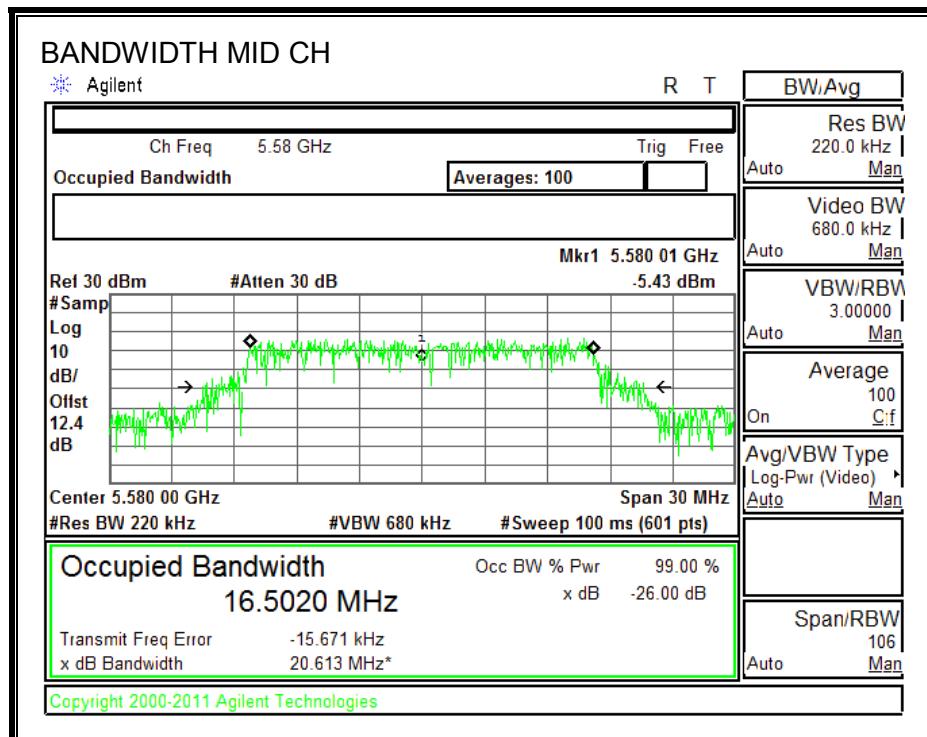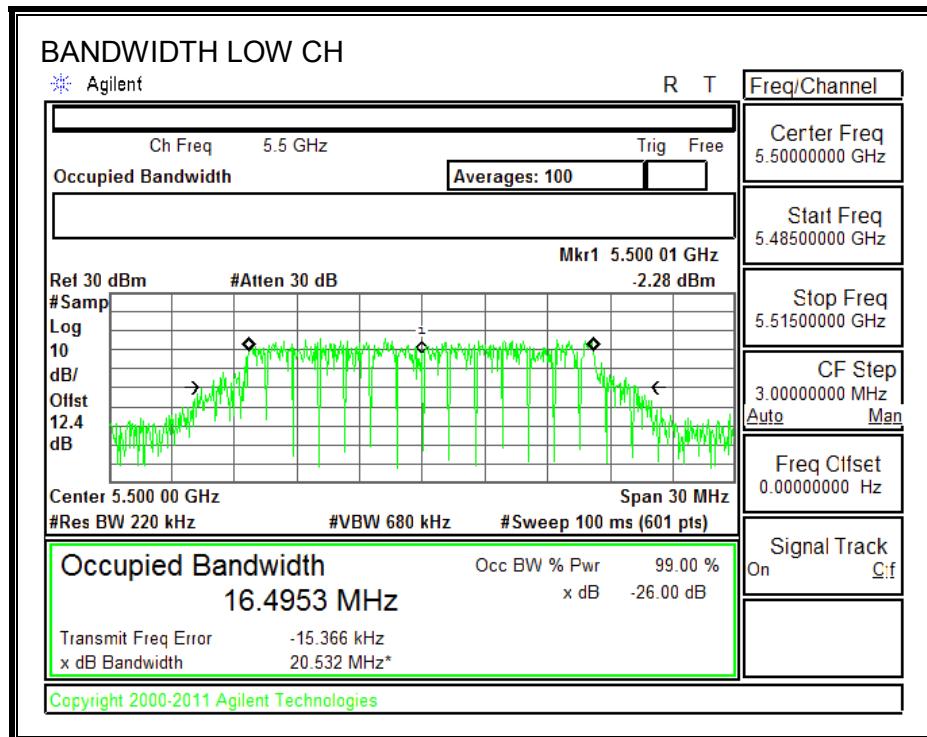

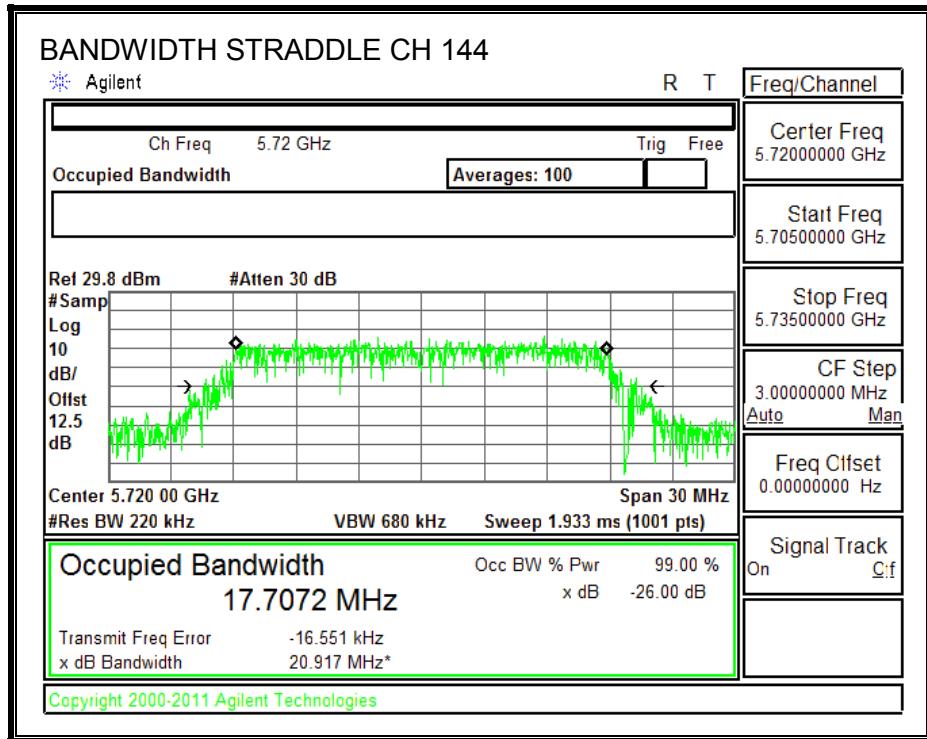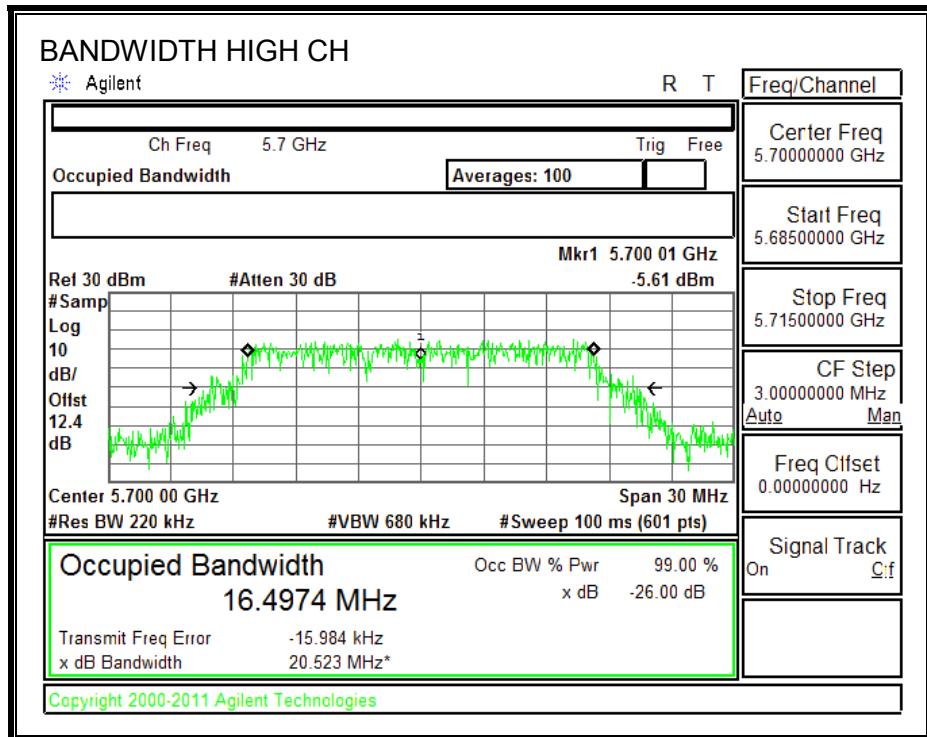

### 9.25.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### ANTENNA 0

Antenna	Gain	(dBi)
		5.00

#### ANTENNA 1

Antenna	Gain	(dBi)
		4.57

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	21.72	5.00	24.00	11.00
Mid	5580	21.75	5.00	24.00	11.00
High	5700	21.65	5.00	24.00	11.00
144	5720	21.81	5.00	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



### Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	17.94	17.94	24.00	-6.06
Mid	5580	17.96	17.96	24.00	-6.04
High	5700	17.45	17.45	24.00	-6.55
144	5720	17.50	17.50	24.00	-6.50

### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	6.92	6.92	11.00	-4.08
Mid	5580	7.18	7.18	11.00	-3.82
High	5700	6.95	6.95	11.00	-4.05

**PSD, Chain 0**

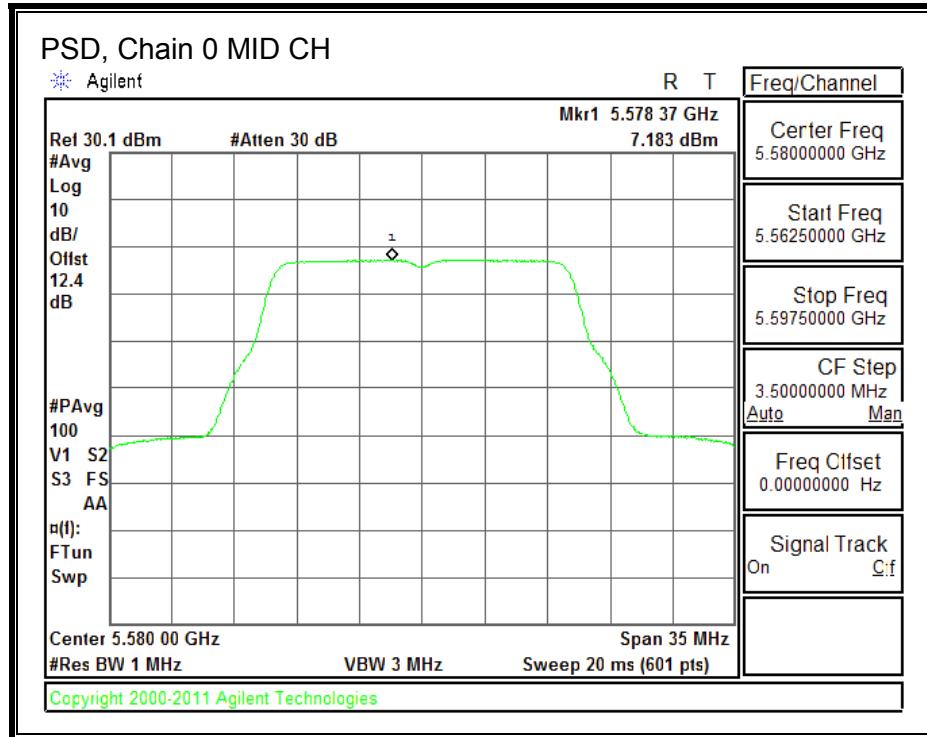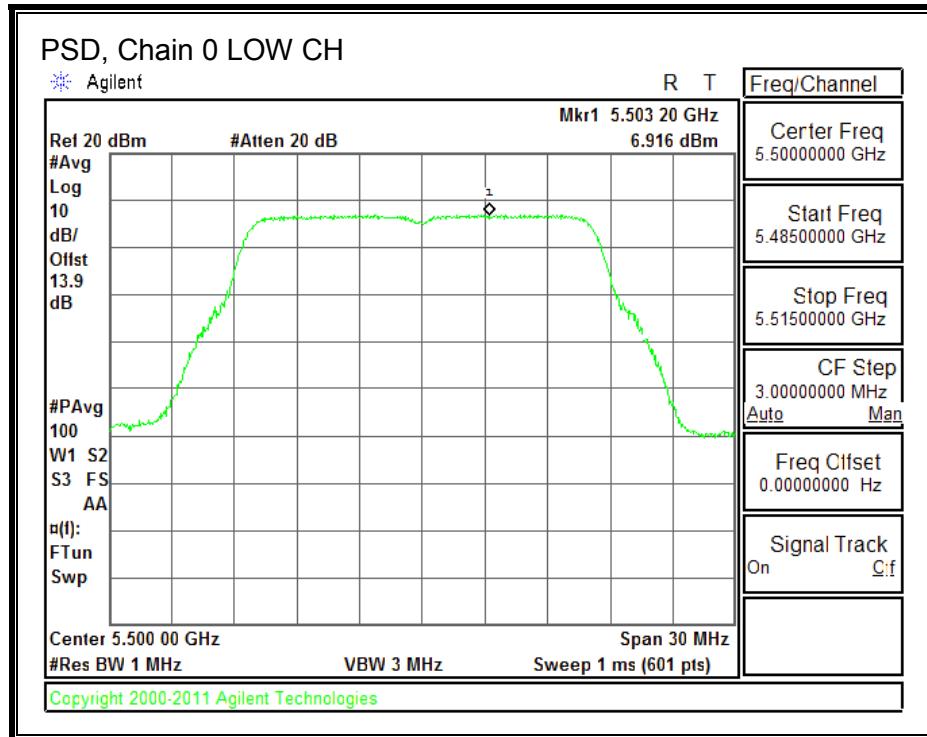

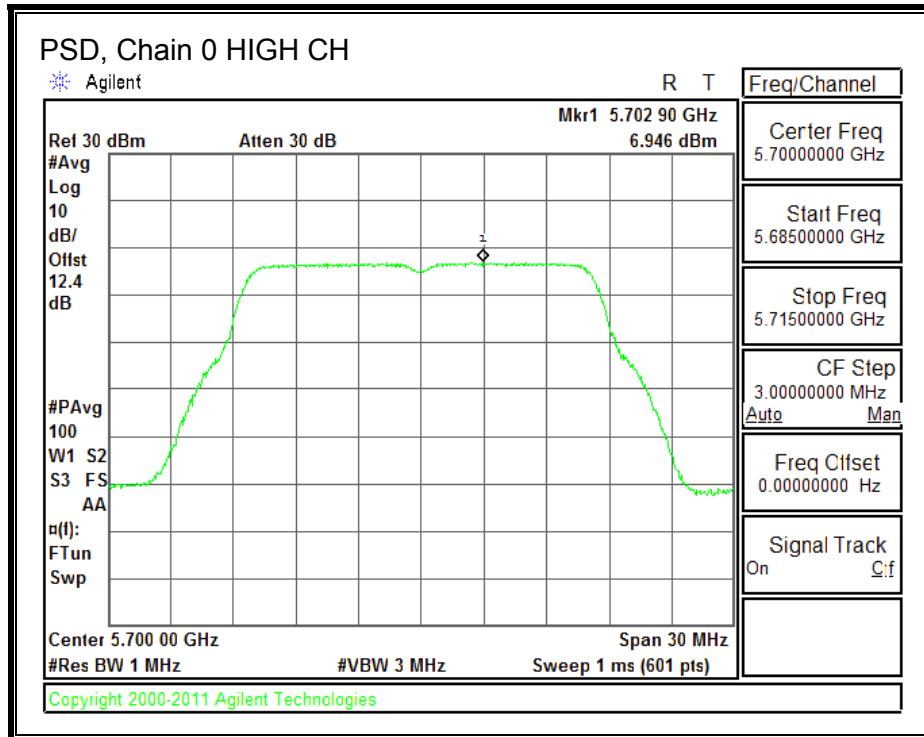

## STRADDLE CHANNEL 144 RESULTS

### UNII-2C BAND

#### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	15.91	5.00	5.00	23.02	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

#### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	17.12	17.12	23.02	-5.90

#### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	6.82	6.82	11.00	-4.18

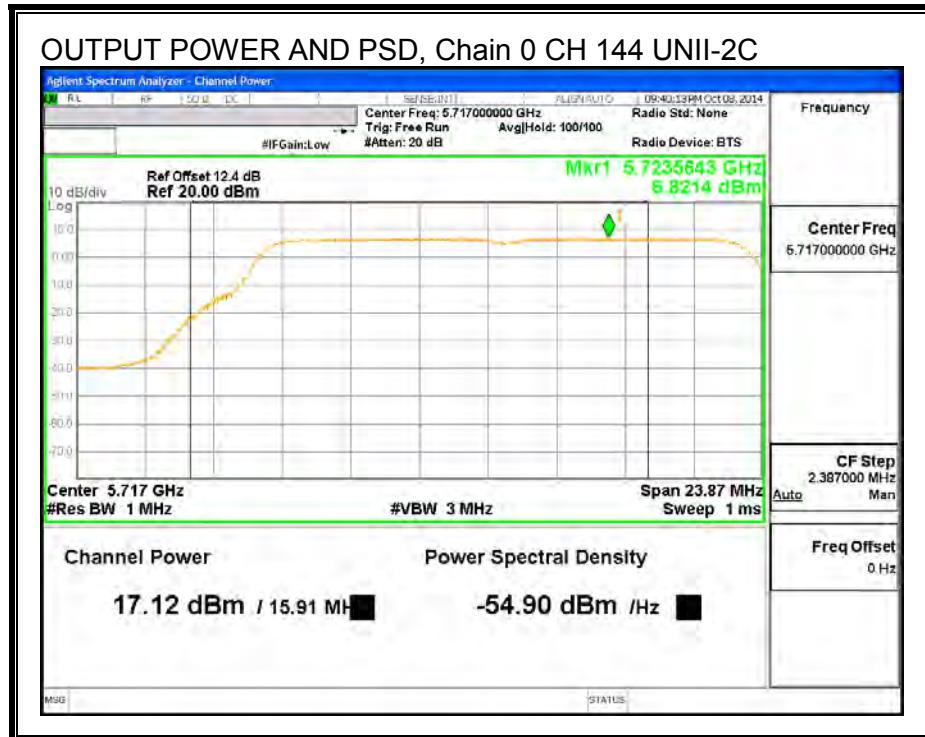

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	4.78	30.00	30.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	11.07	11.07	30.00	-18.93

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	3.78	3.78	30.00	-26.22

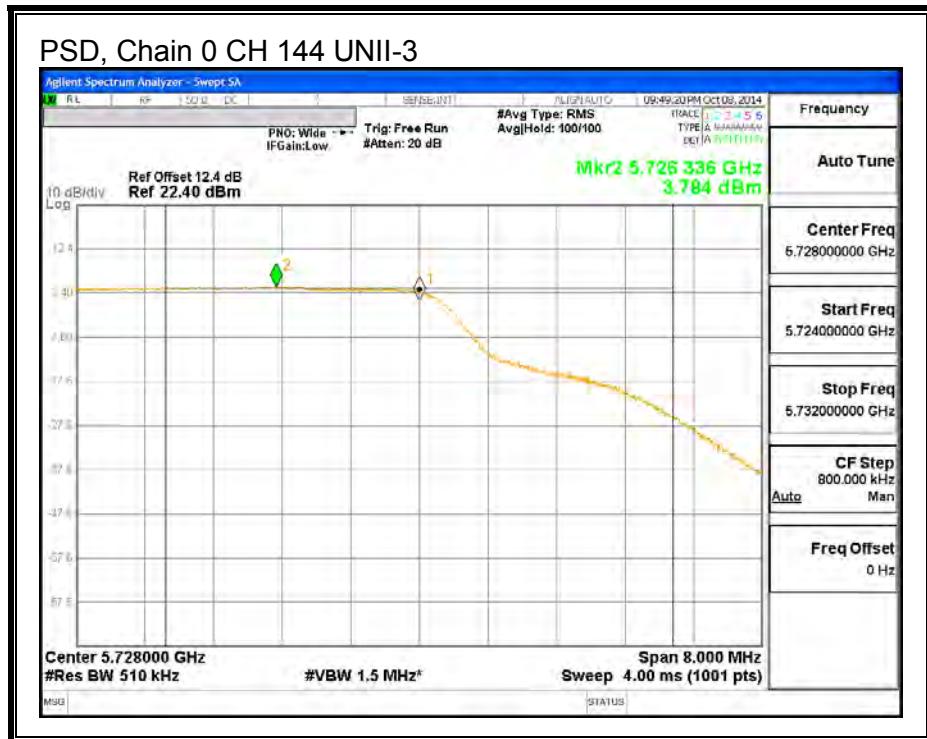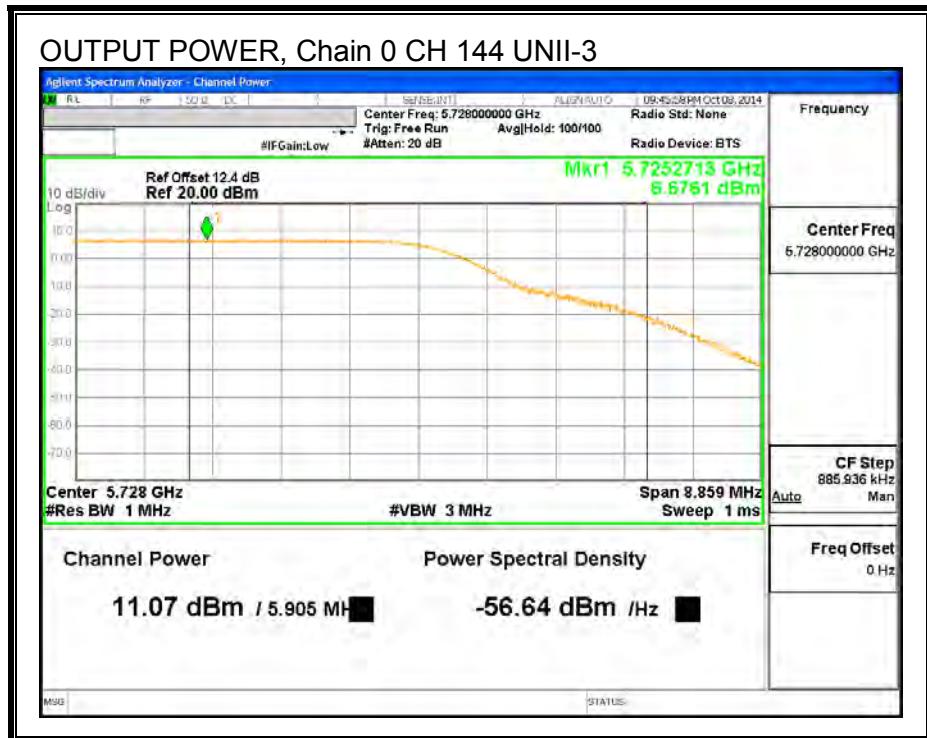

## 9.26. 802.11n HT20 2TX CDD MODE IN THE 5.6 GHz BAND

### 9.26.1. 26 dB BANDWIDTH



#### LIMITS



None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5500	21.80	21.95
Mid	5580	22.05	21.95
High	5700	21.95	21.90
144	5720	21.90	21.84



**26 dB BANDWIDTH, Chain 0**

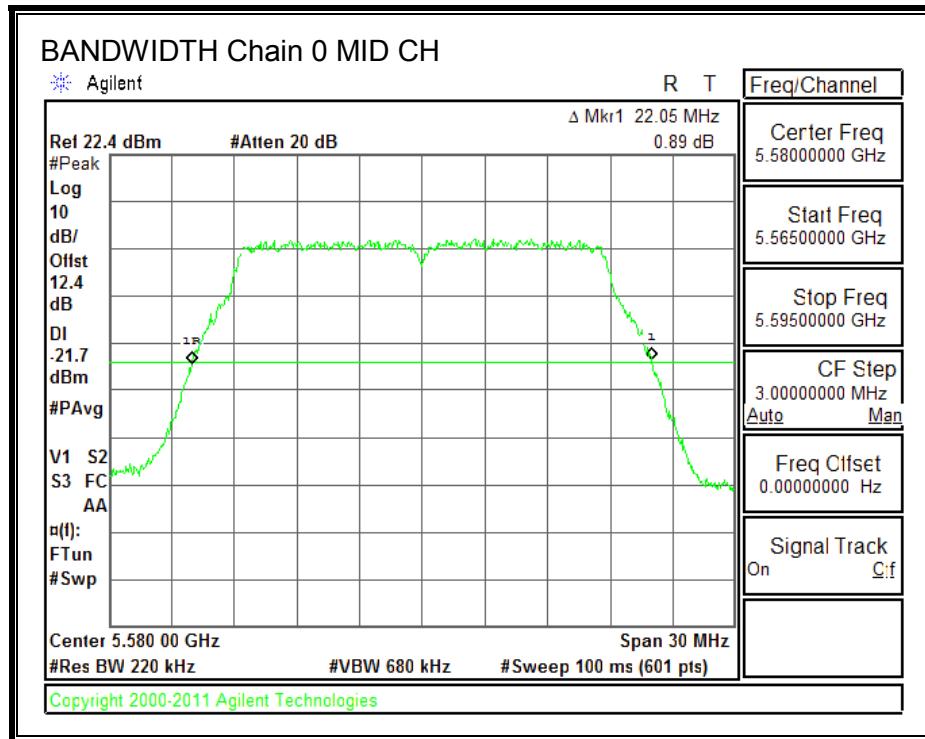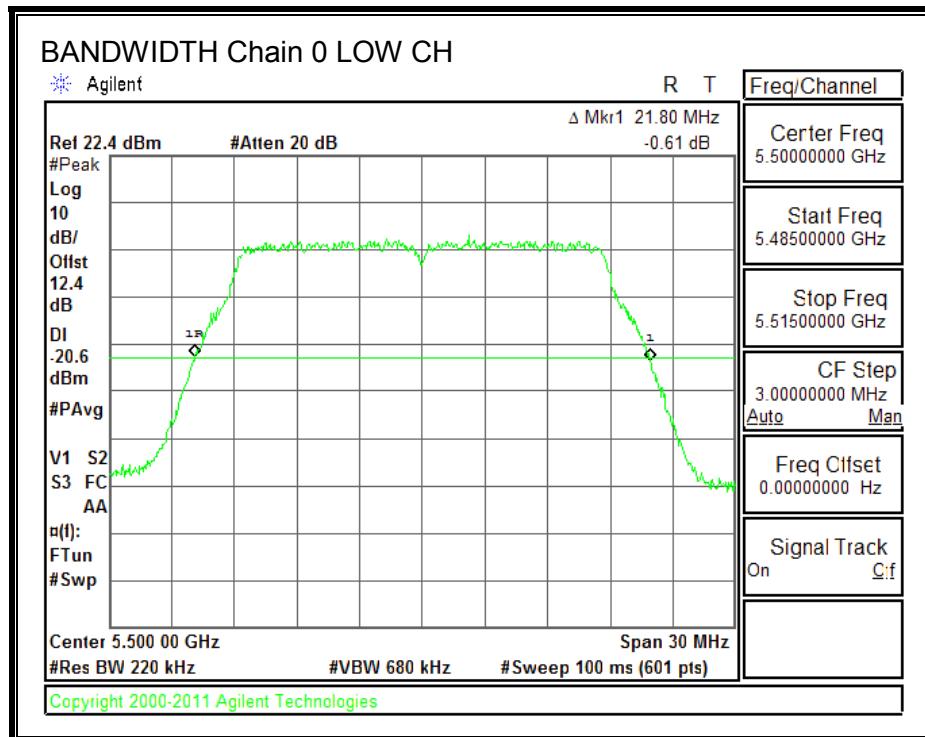

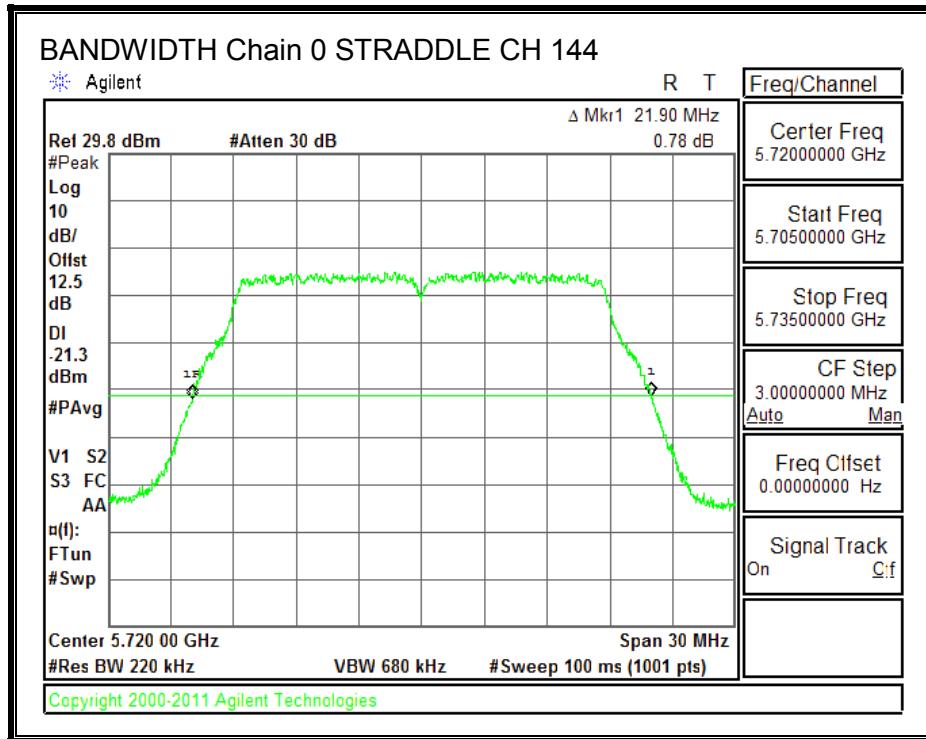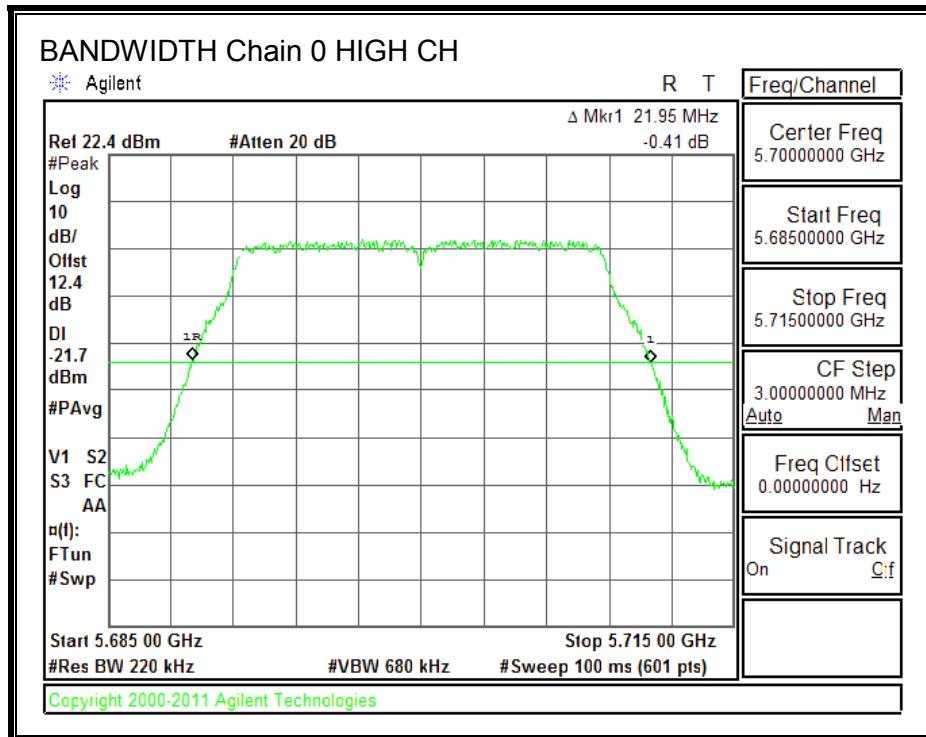

**26 dB BANDWIDTH, Chain 1**

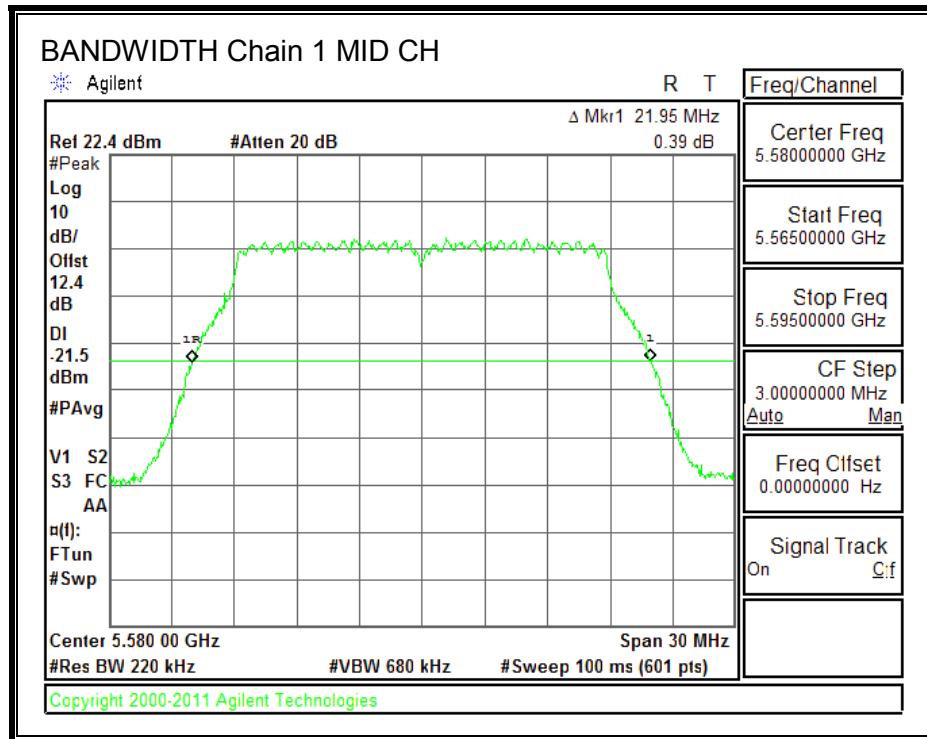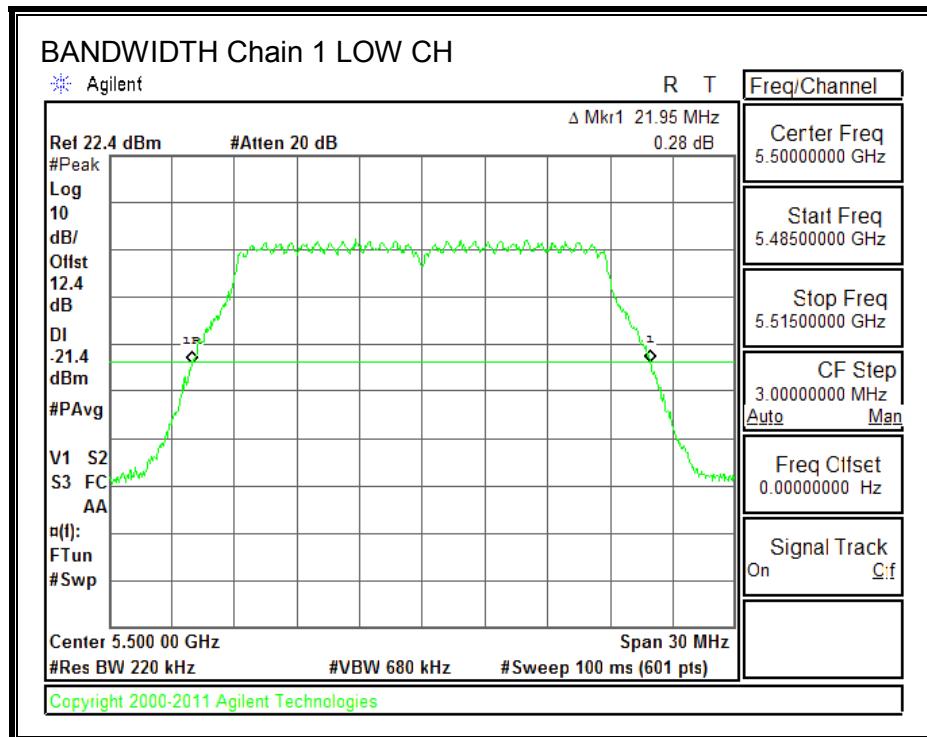

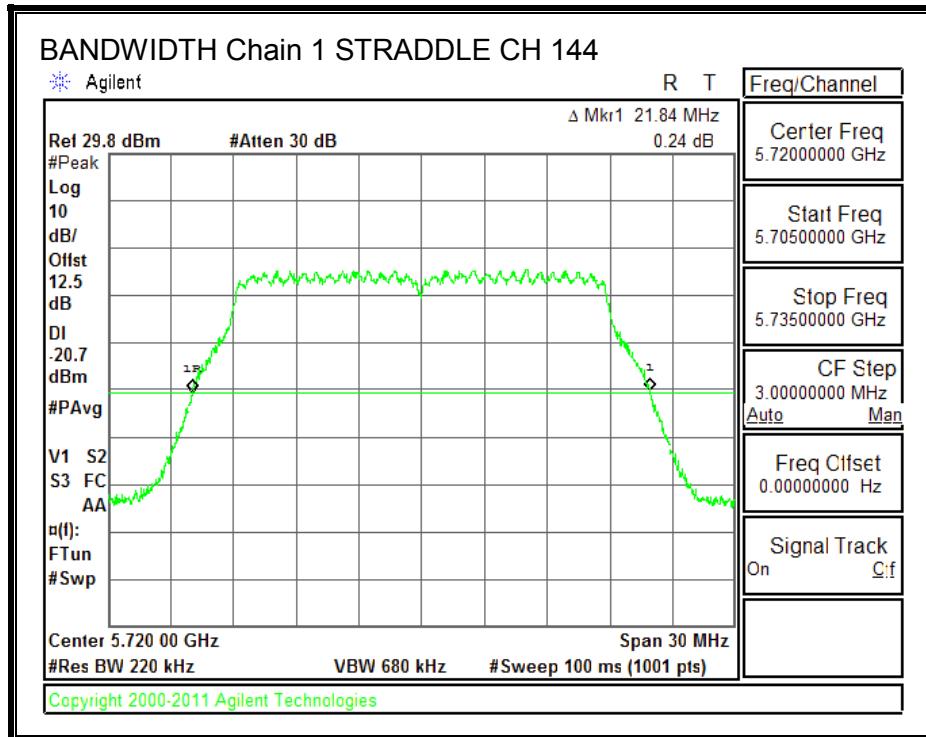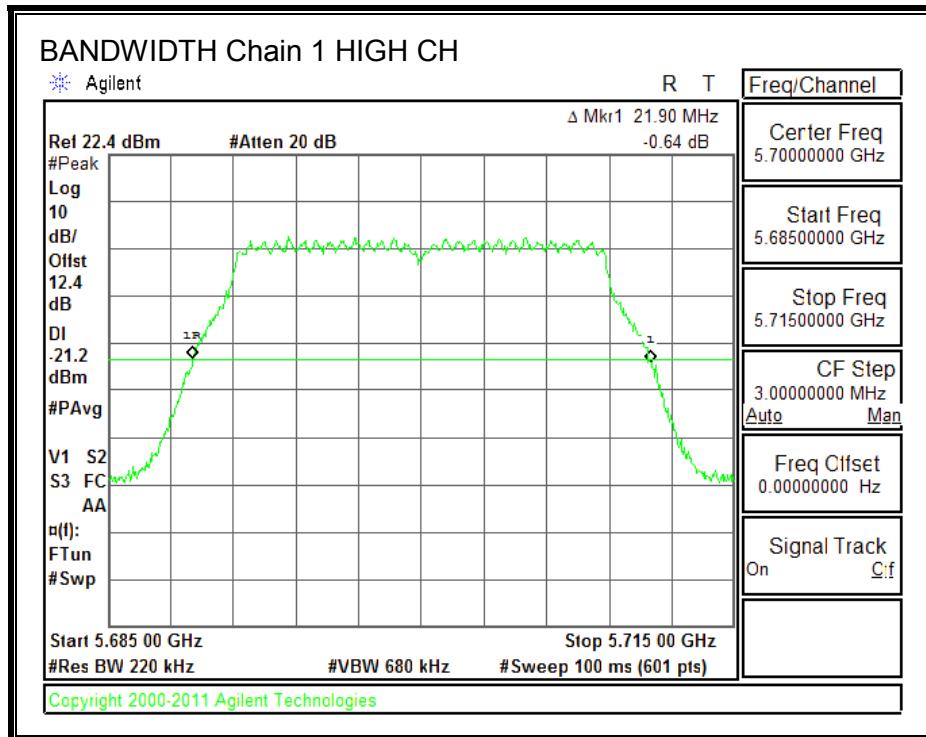

## 9.26.2. 99% BANDWIDTH



### LIMITS



None; for reporting purposes only.

### RESULTS



Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5500	17.6848	17.6815
Mid	5580	17.6947	17.6760
High	5700	17.6815	17.6783
144	5720	17.6972	17.6807



**99% BANDWIDTH, Chain 0**

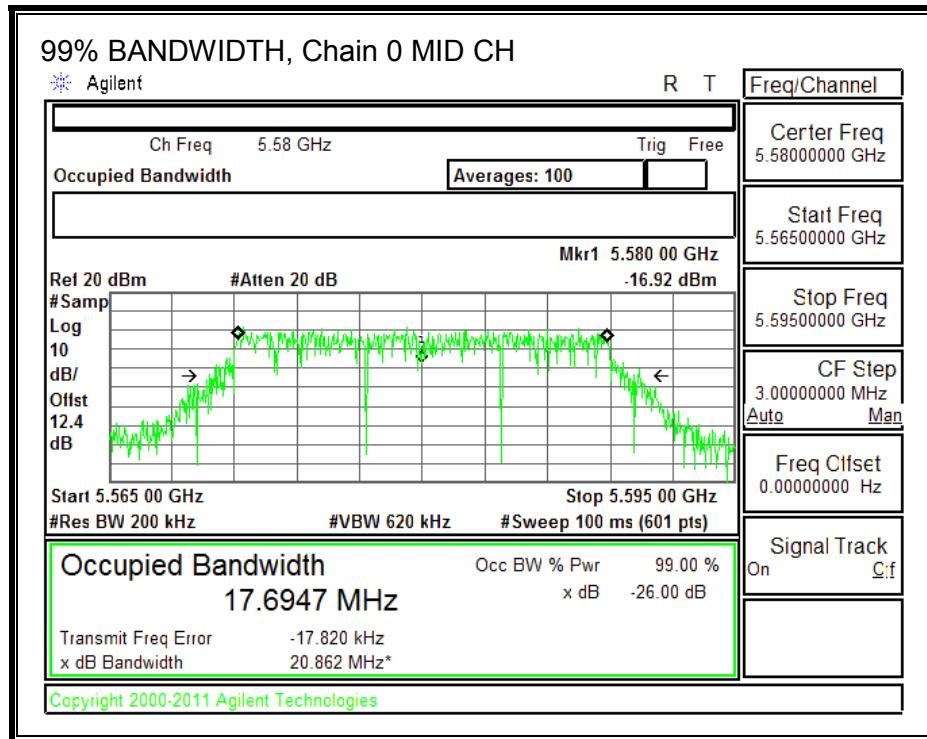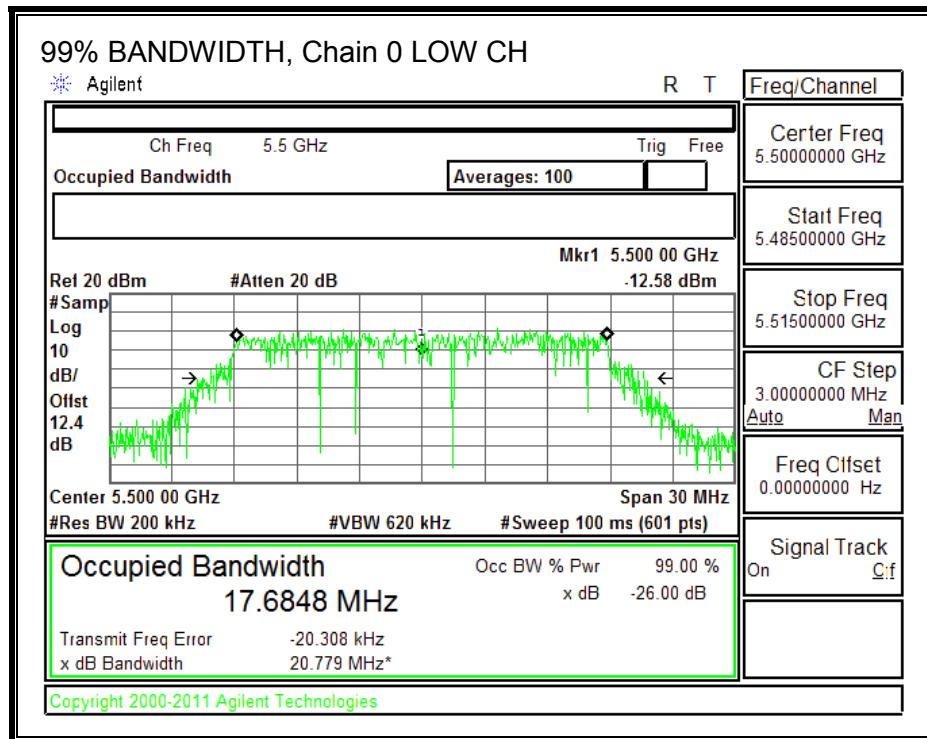

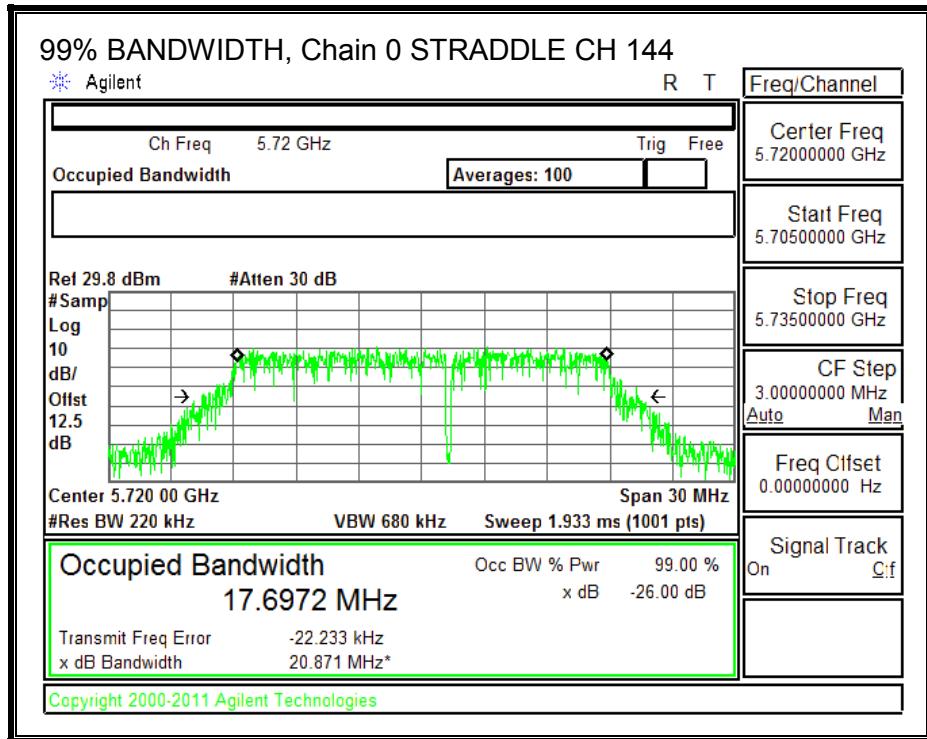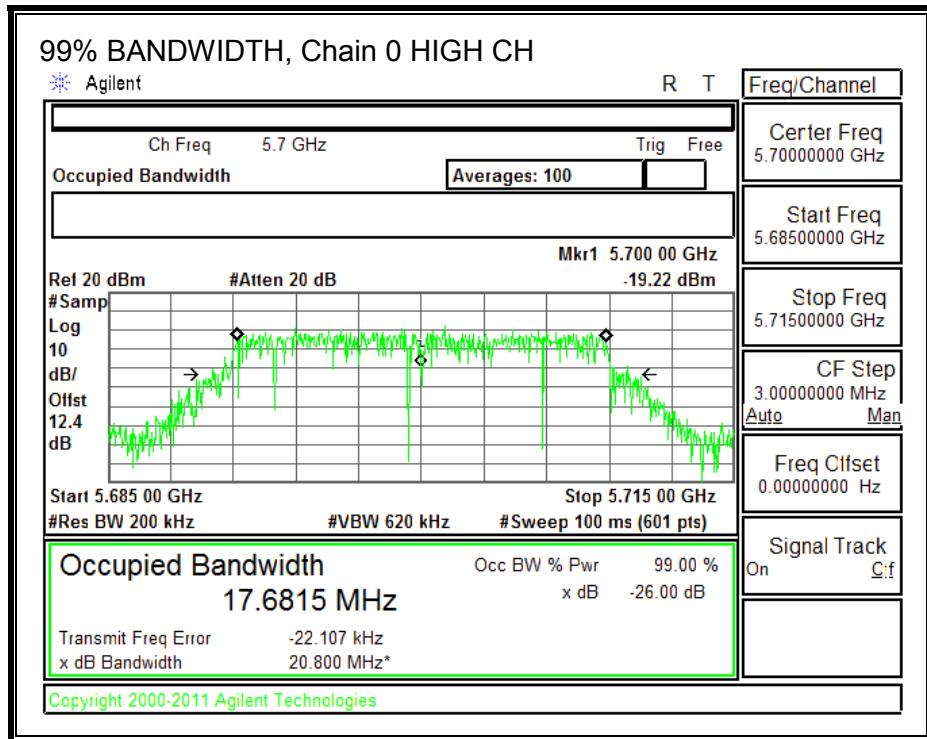

**99% BANDWIDTH, Chain 1**

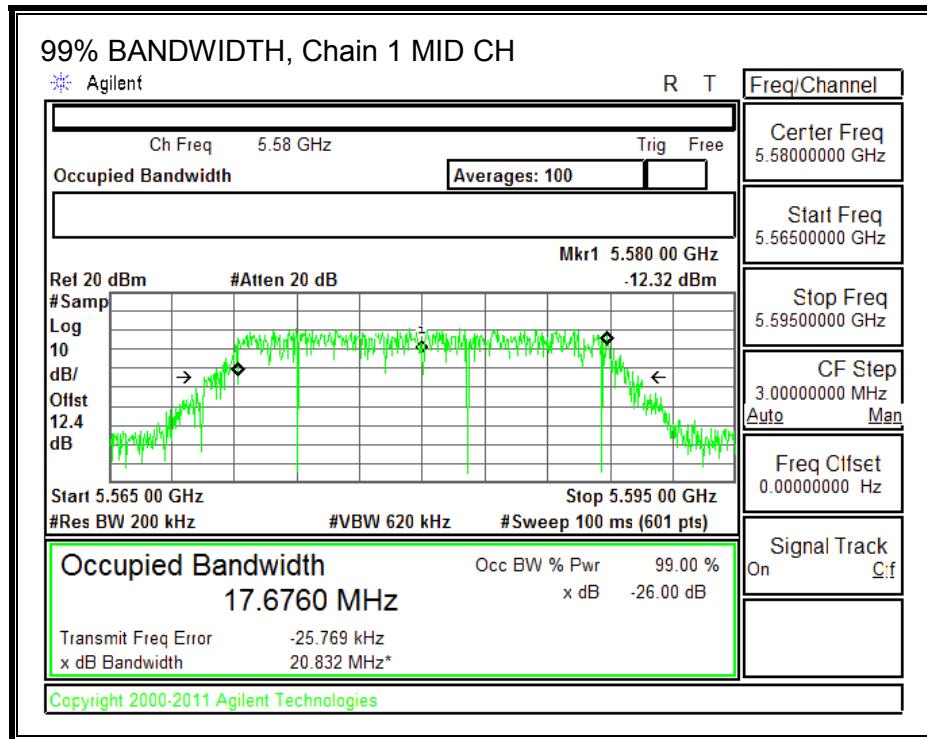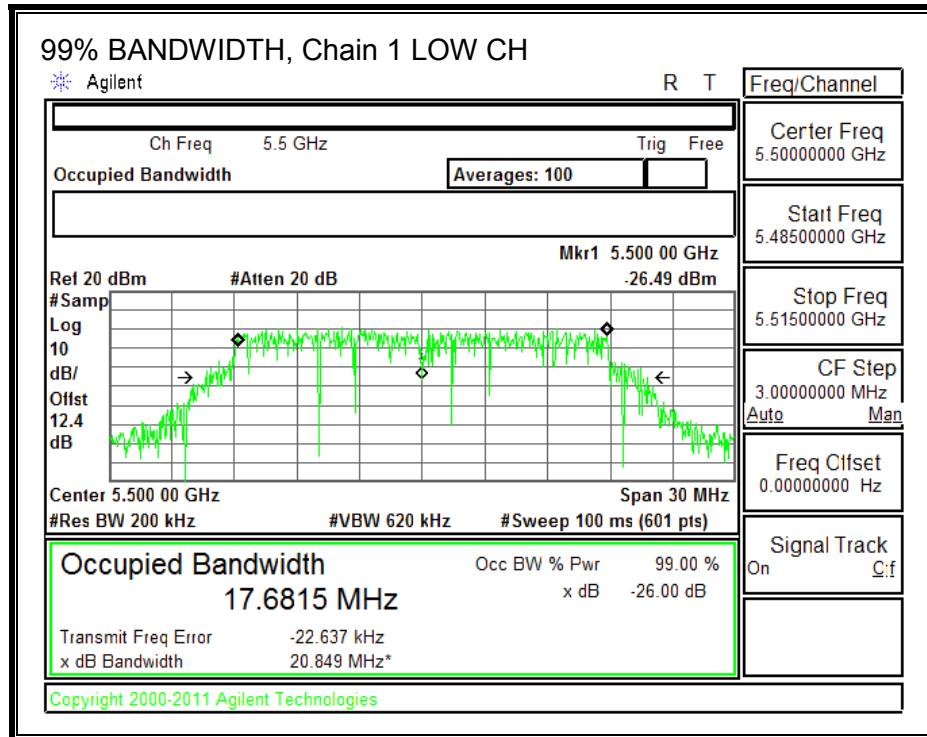

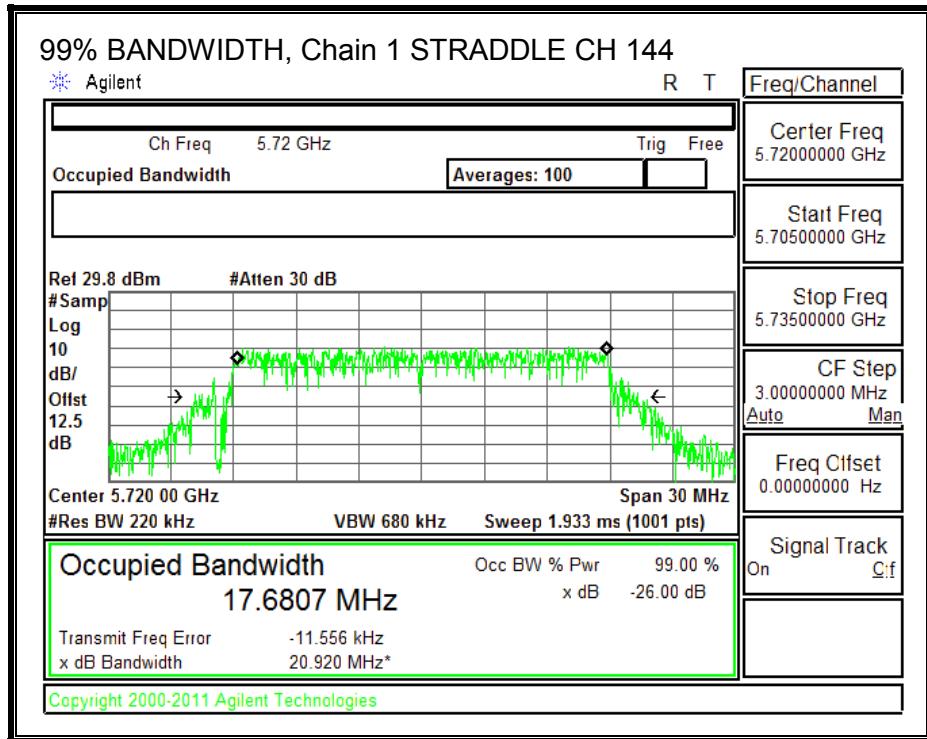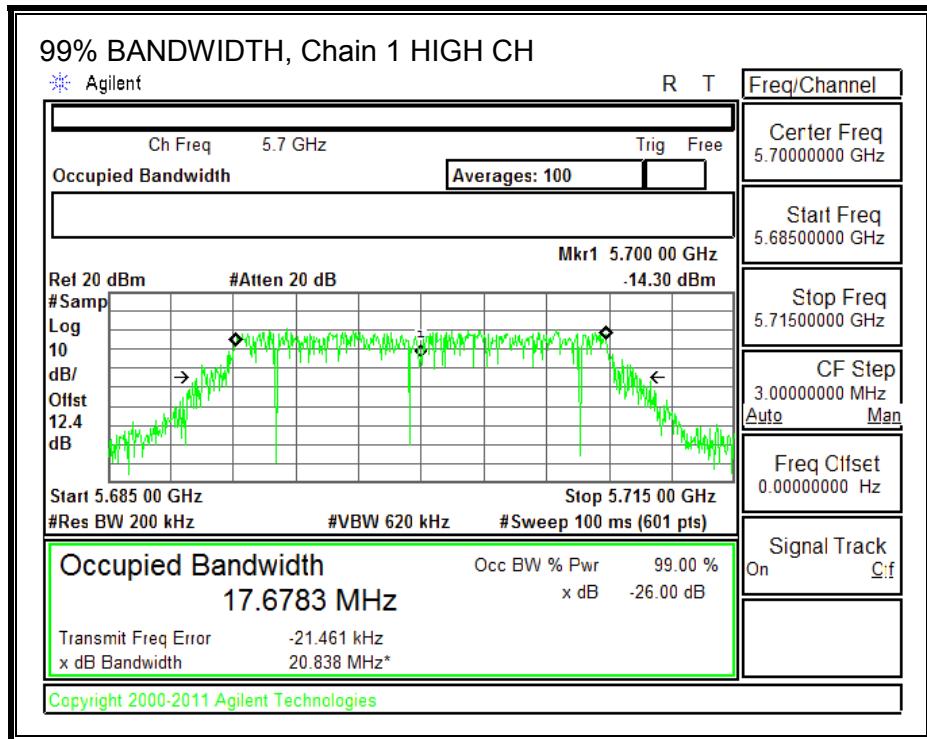

### 9.26.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
5.00	4.57	4.79

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
5.00	4.57	7.80

## RESULTS

### Antenna Gain, and Limits

Frequency (MHz)	Min 26 dB BW (MHz)	Direction Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
5500	21.80	4.79	7.80	24.00	9.20
5580	21.95	4.79	7.80	24.00	9.20
5700	21.95	4.79	7.80	24.00	9.20
5720	21.90	4.79	7.80	24.00	9.20

cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------	------	--



### Power Results


Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
5500	14.25	14.39	17.33	24.00	-6.67
5580	14.24	14.29	17.28	24.00	-6.72
5700	14.25	14.23	17.25	24.00	-6.75
5720	14.50	14.48	17.50	24.00	-6.50

### Limits


Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
5500	4.23	4.15	7.20	9.20	-2.00
5580	3.93	4.00	6.98	9.20	-2.22
5700	4.07	4.09	7.09	9.20	-2.11



**PSD, Chain 0**

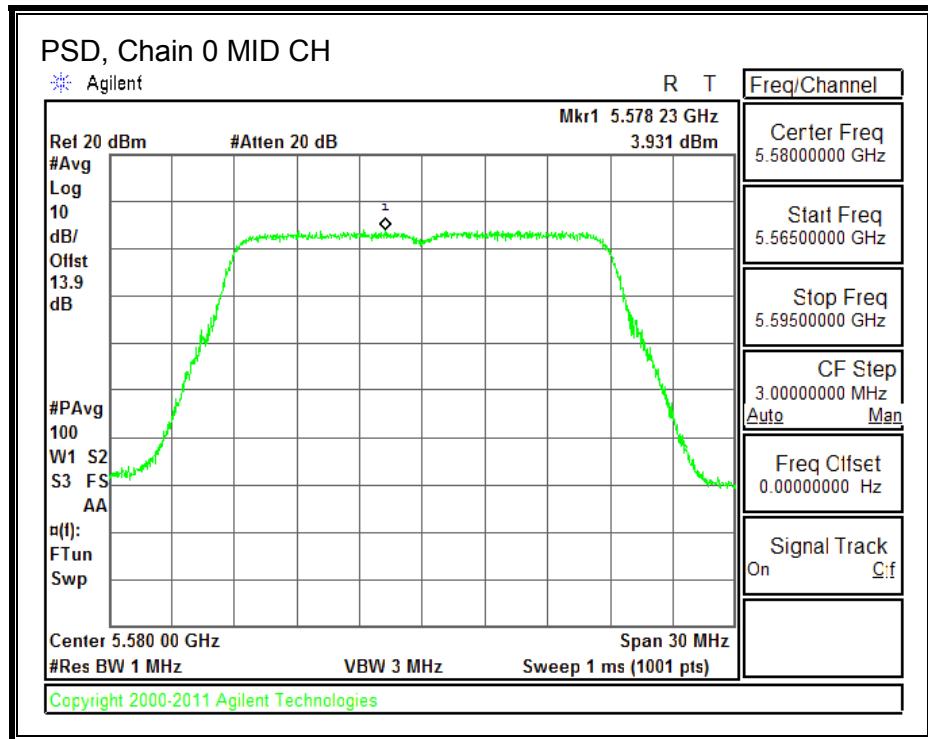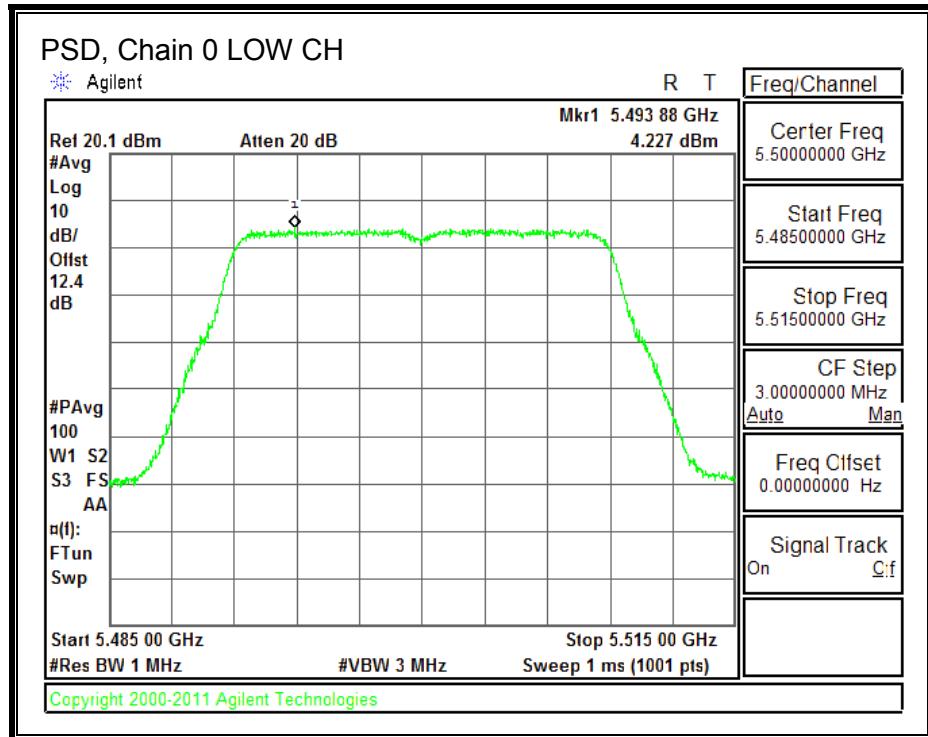

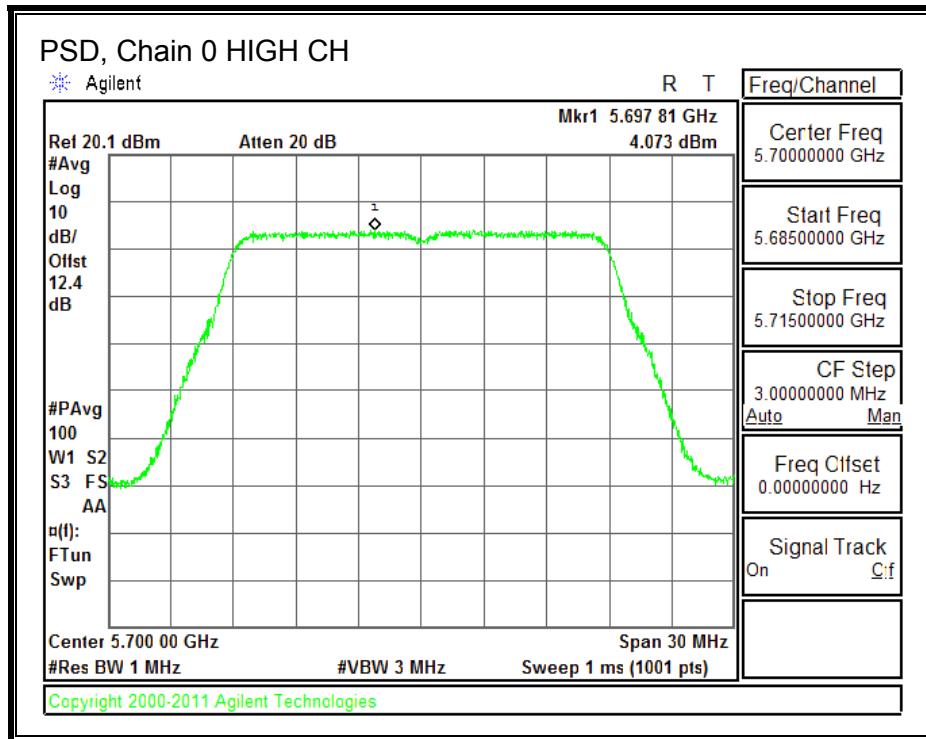

### PSD, Chain 1

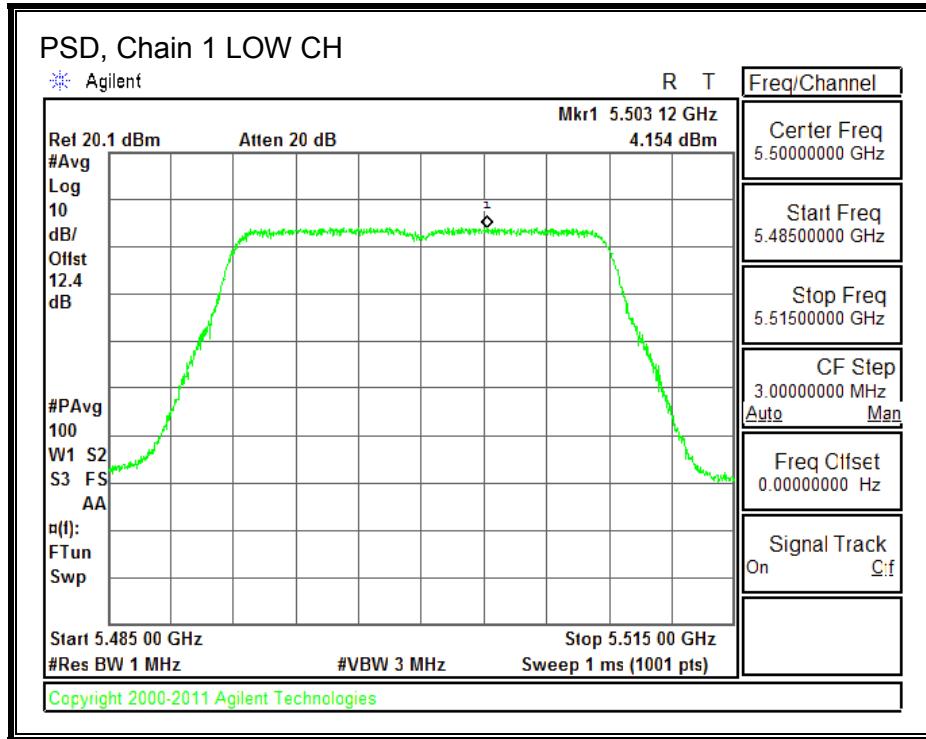

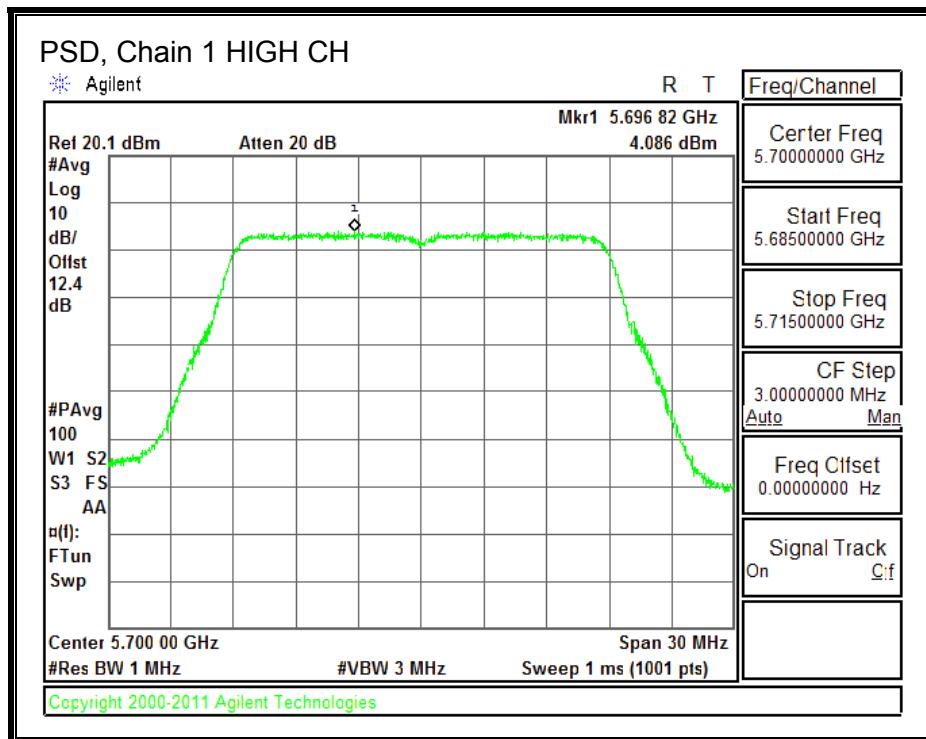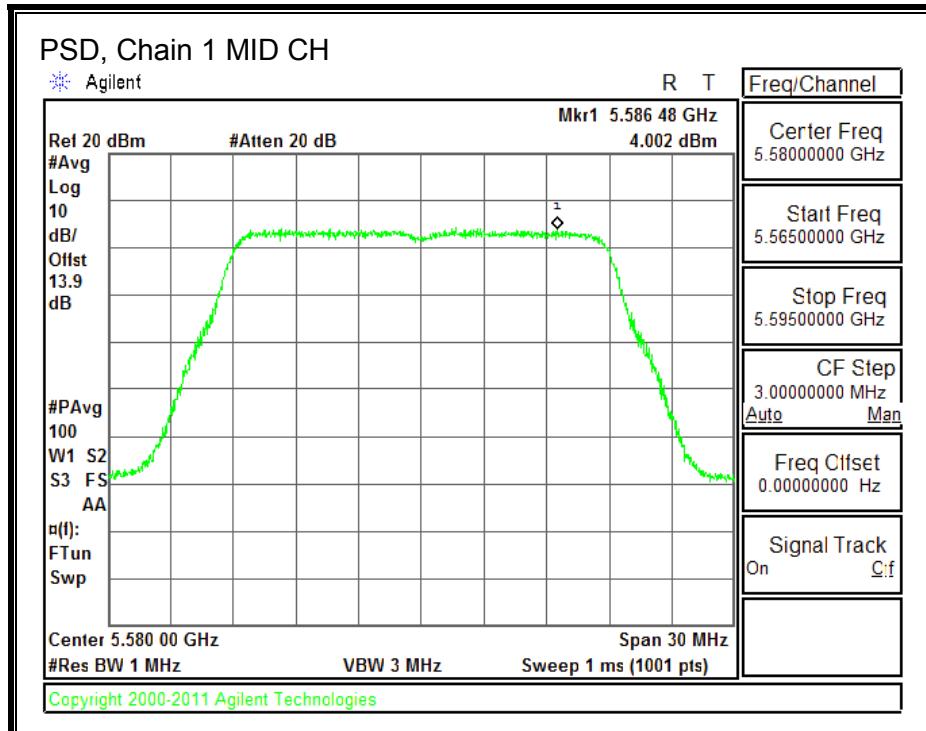

**STRADDLE CHANNEL 144 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	15.92	4.79	7.80	23.02	9.20



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	13.36	13.42	16.40	23.02	-6.62

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	3.09	3.09	6.10	9.20	-3.10

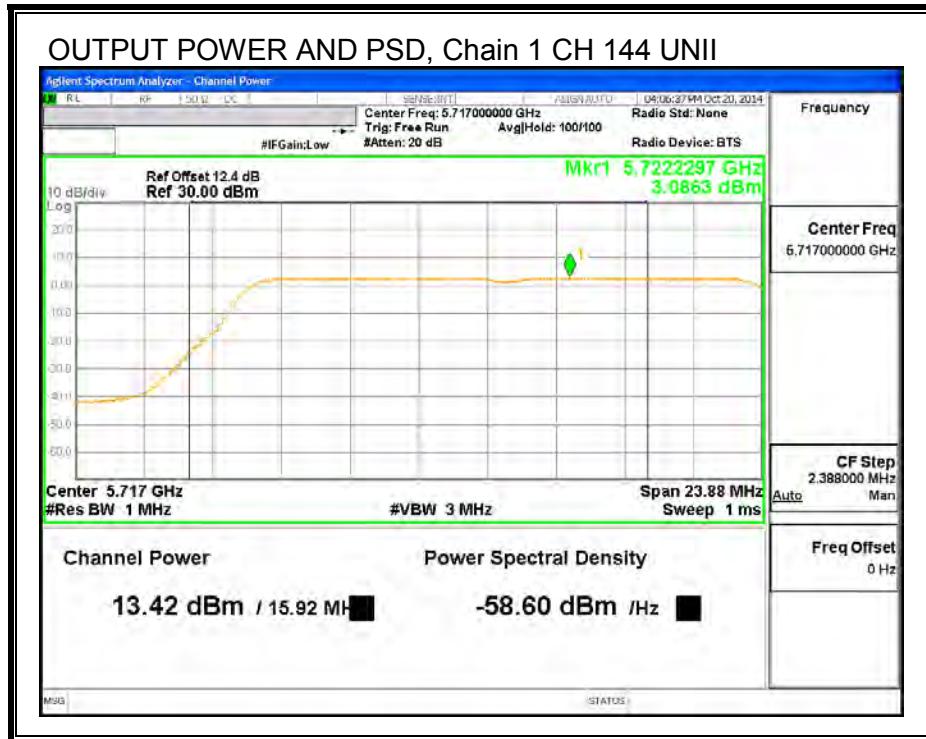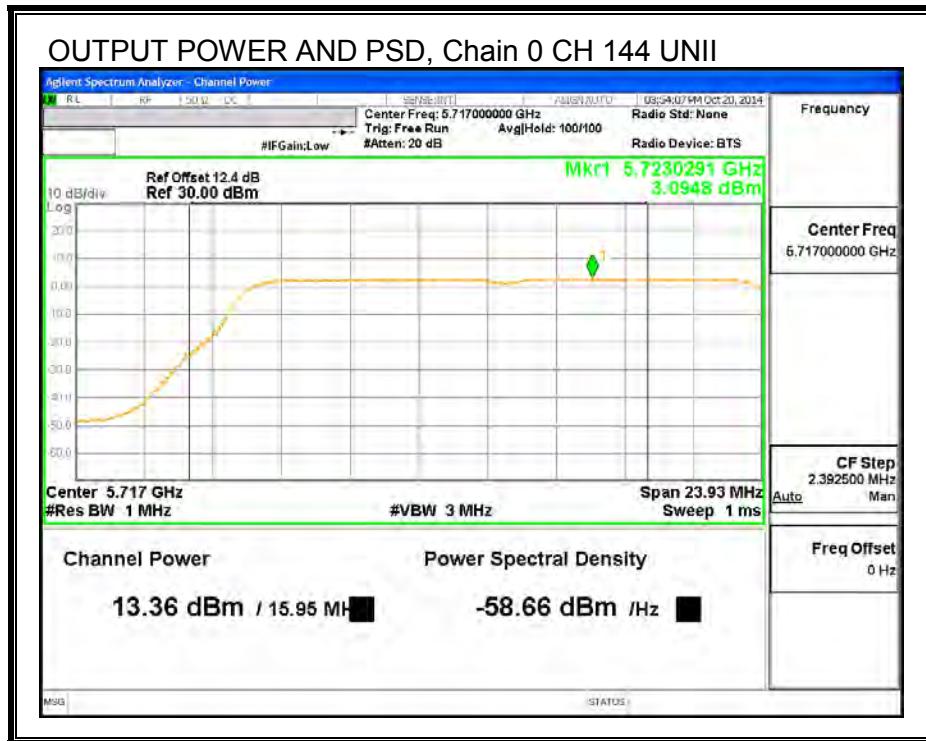

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	4.79	7.80	30.00	28.20



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	7.84	7.80	10.83	30.00	-19.17

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	-0.093	-0.364	2.78	28.20	-25.42

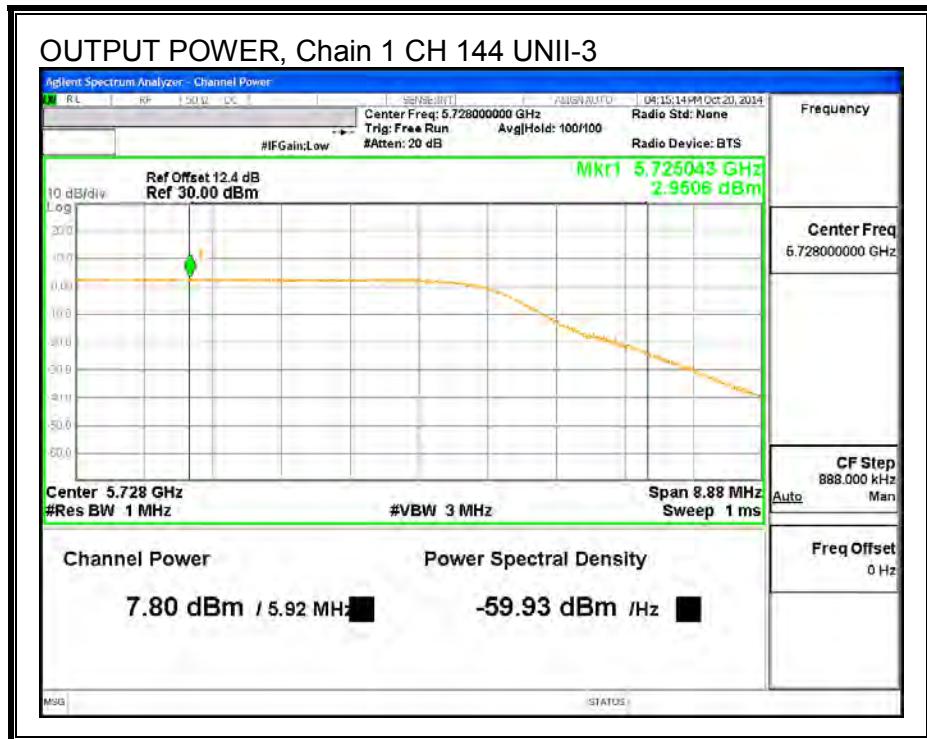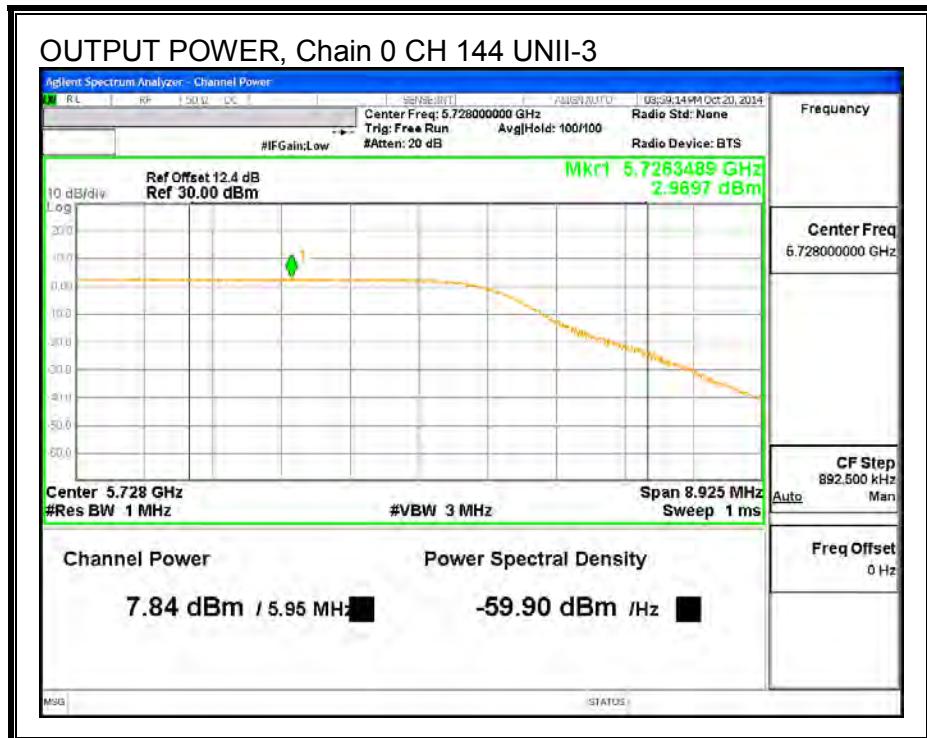

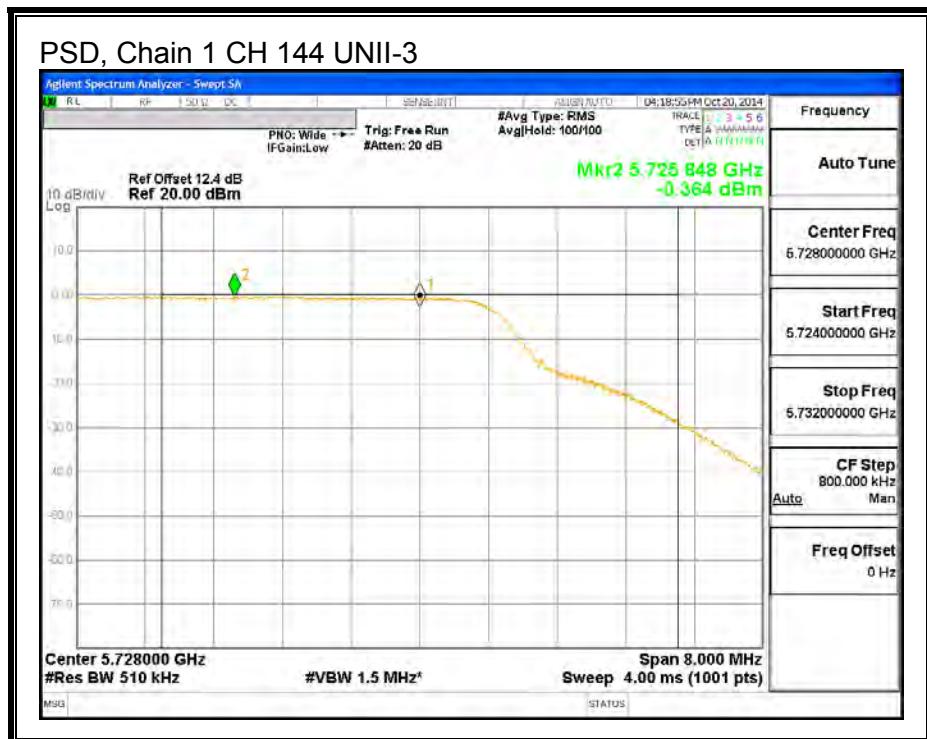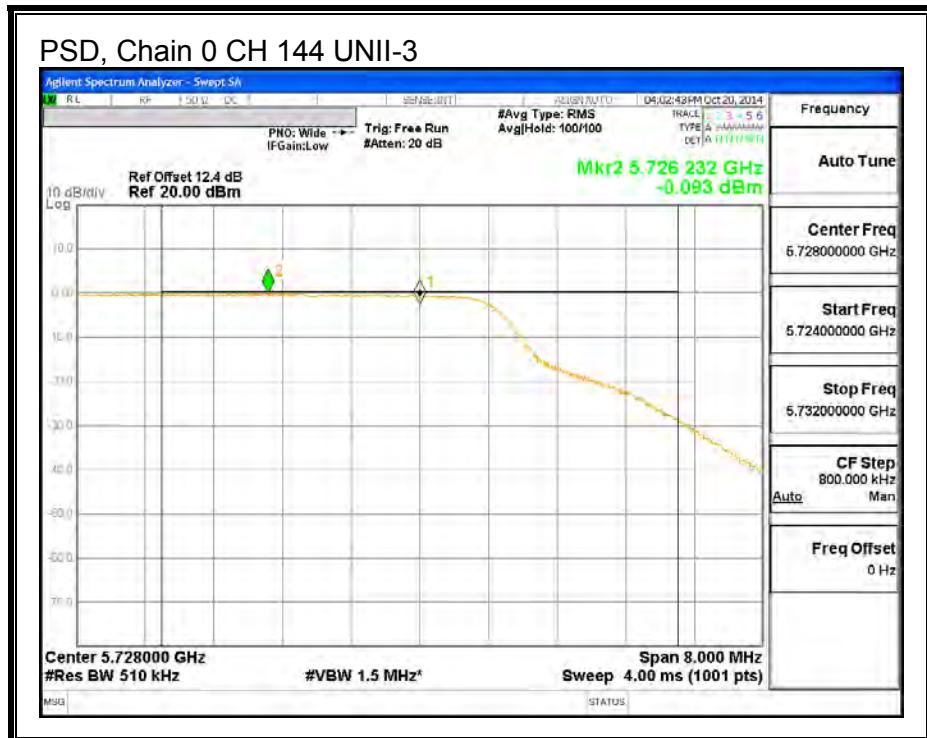

## 9.27. 802.11n HT20 2TX STBC MODE IN THE 5.6 GHz BAND

### 9.27.1. 26 dB BANDWIDTH



#### LIMITS



None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5500	21.87	21.84
Mid	5580	21.96	21.87
High	5700	21.90	21.84
144	5720	21.78	21.78



**26 dB BANDWIDTH, Chain 0**

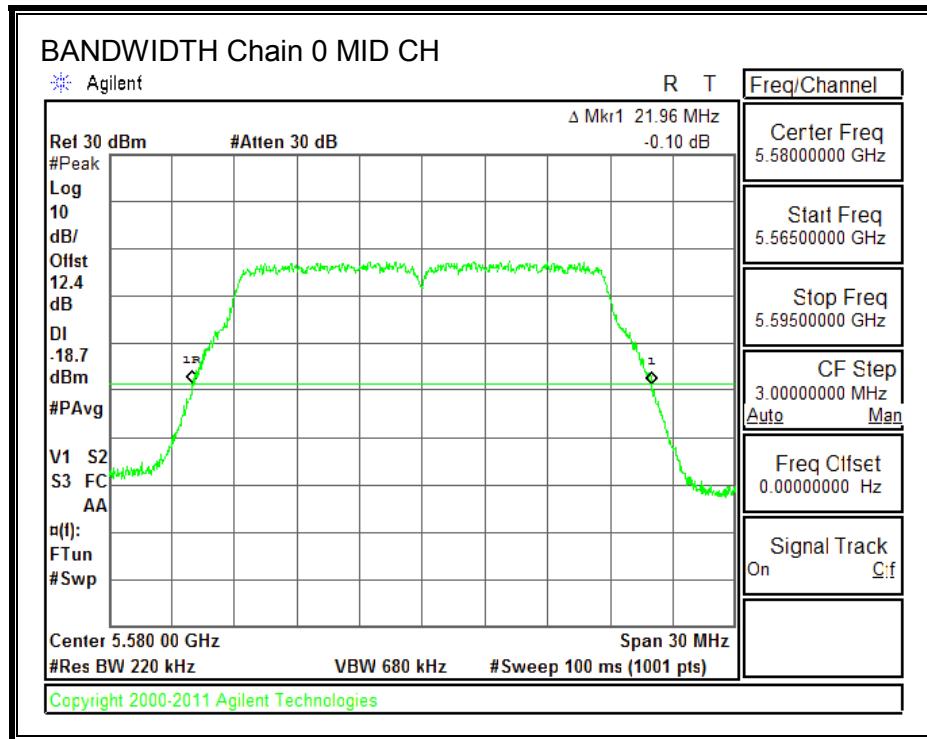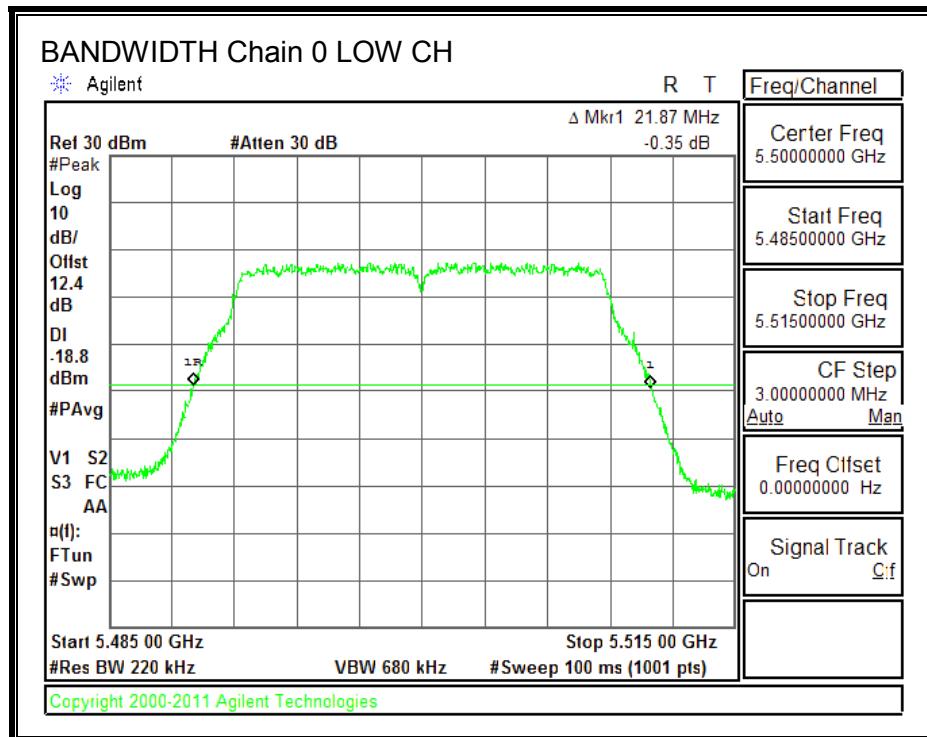

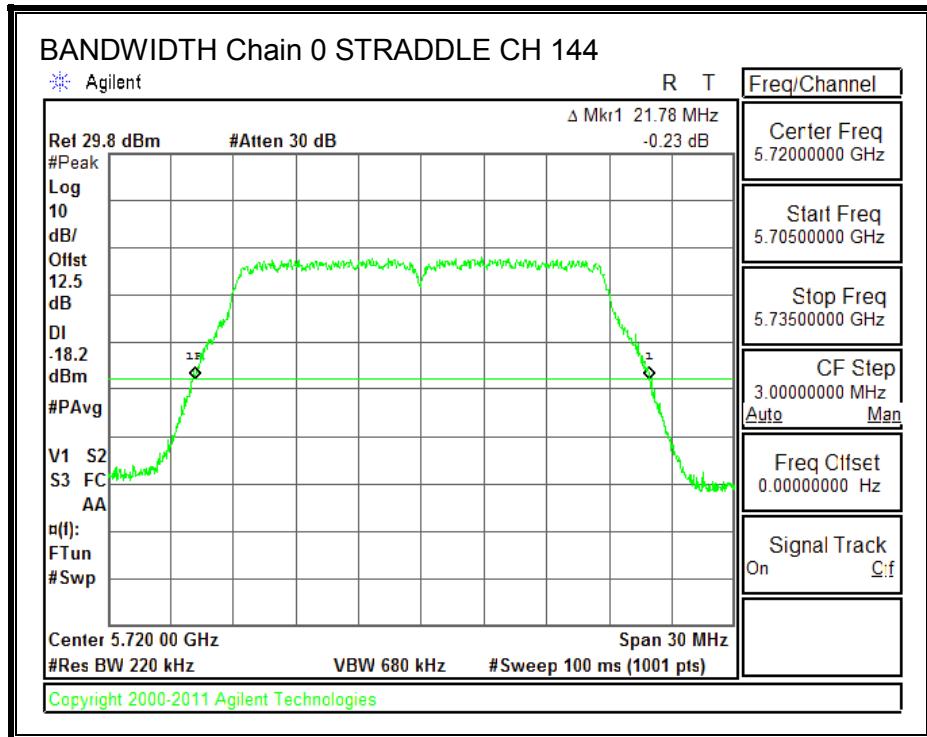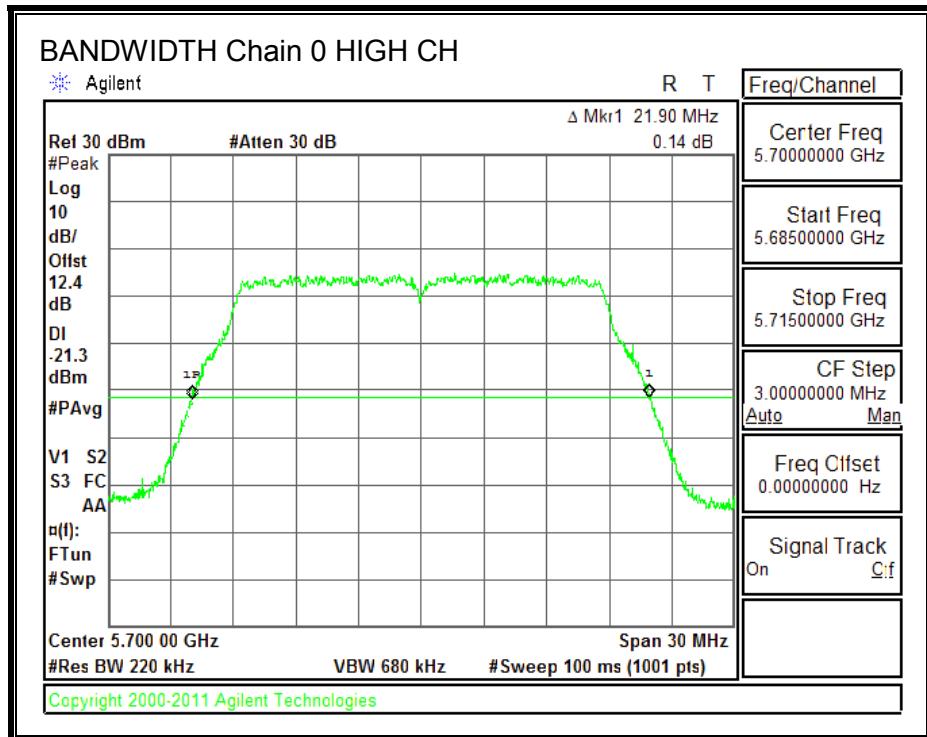

**26 dB BANDWIDTH, Chain 1**

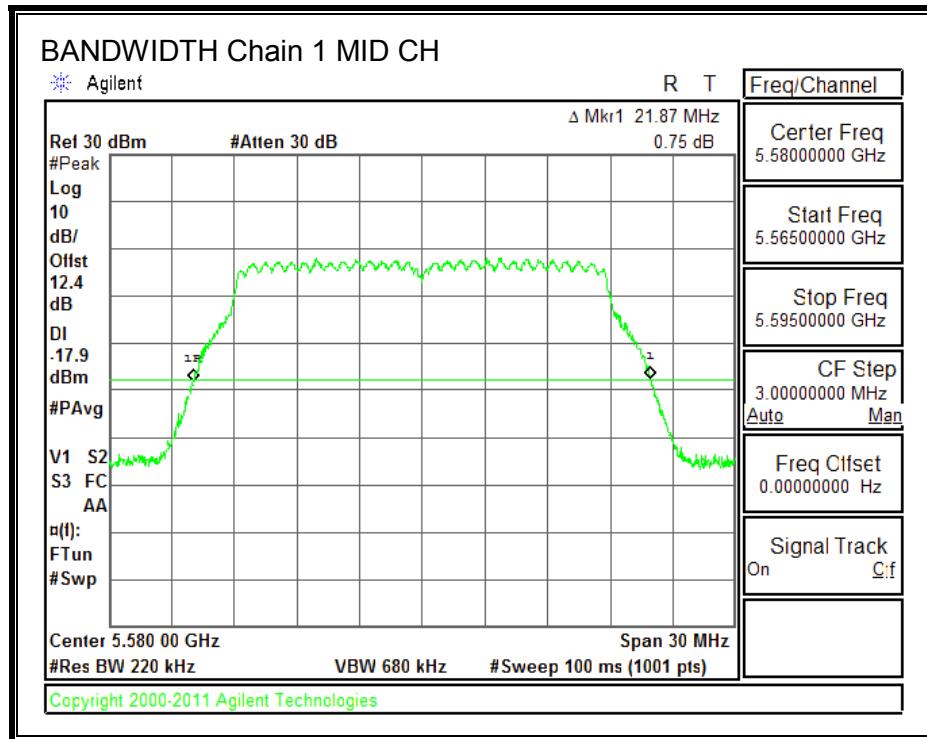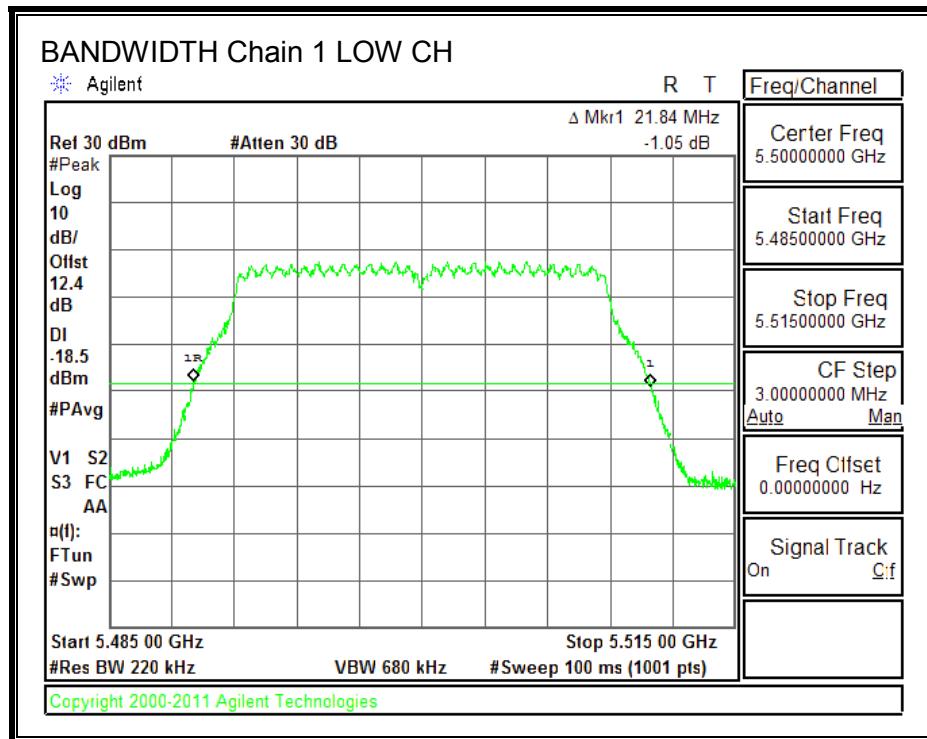

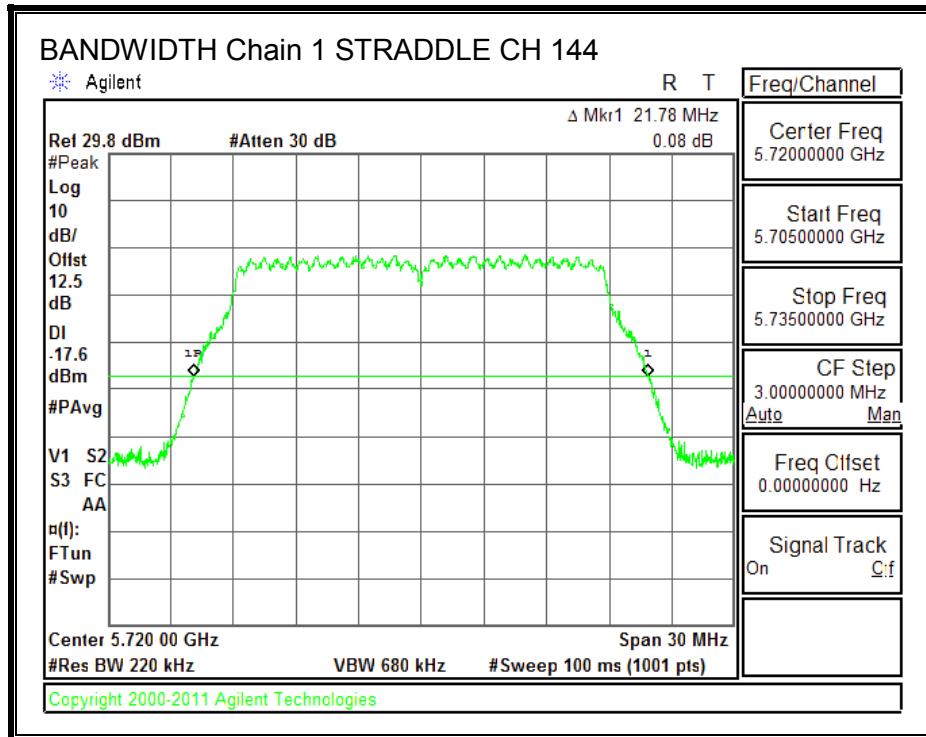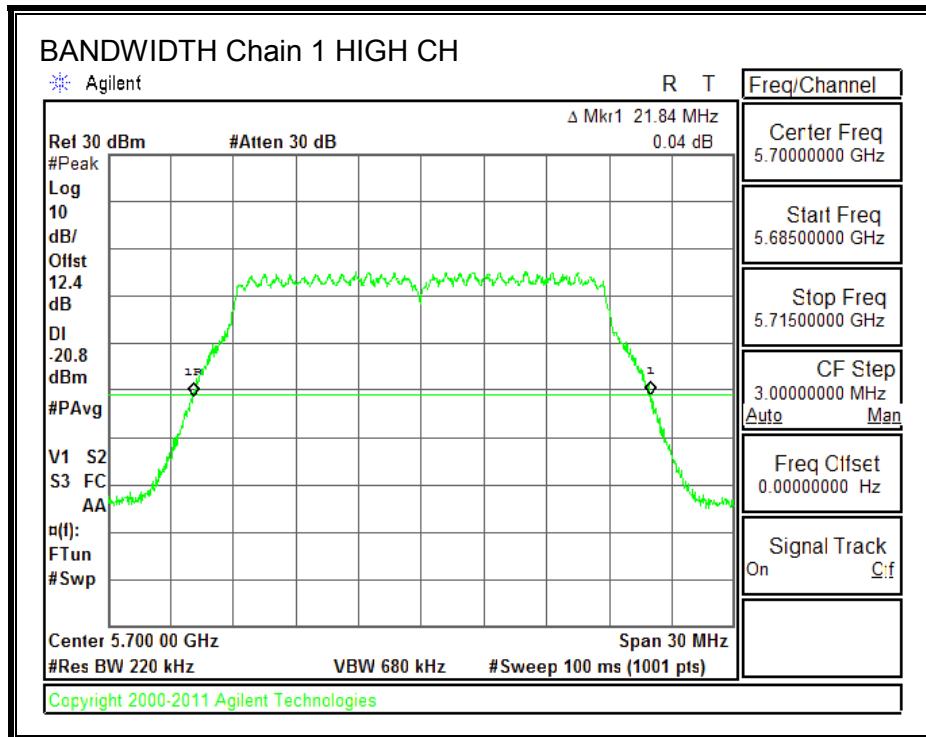

## 9.27.2. 99% BANDWIDTH



### LIMITS



None; for reporting purposes only.

### RESULTS



Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5500	17.7199	17.7227
Mid	5580	17.7215	17.7215
High	5700	17.7103	17.7403
144	5720	17.7143	17.6811



**99% BANDWIDTH, Chain 0**

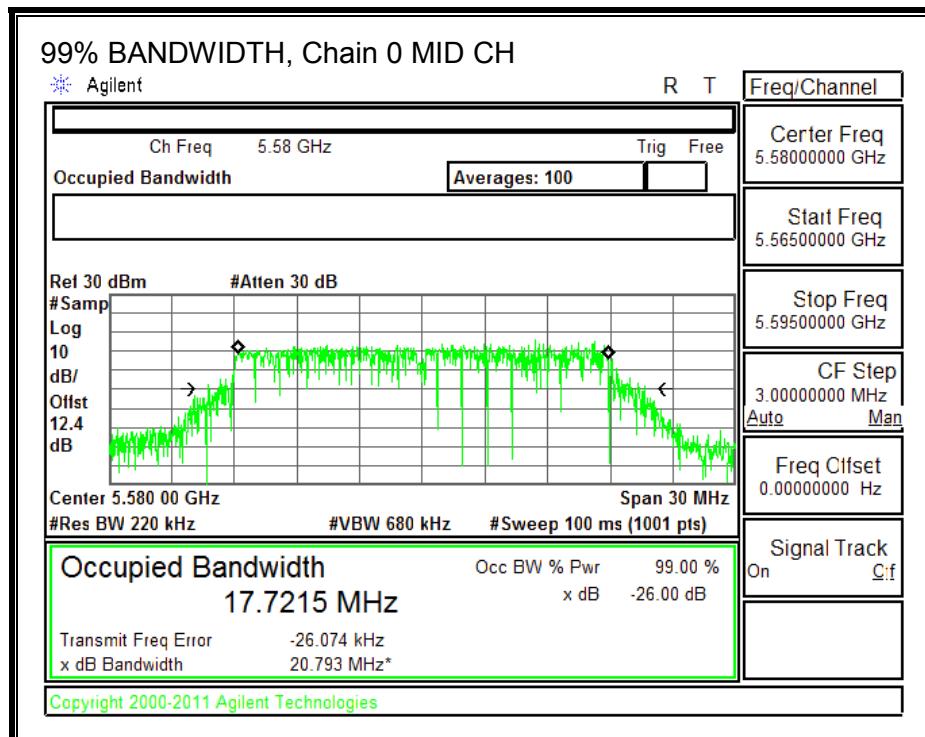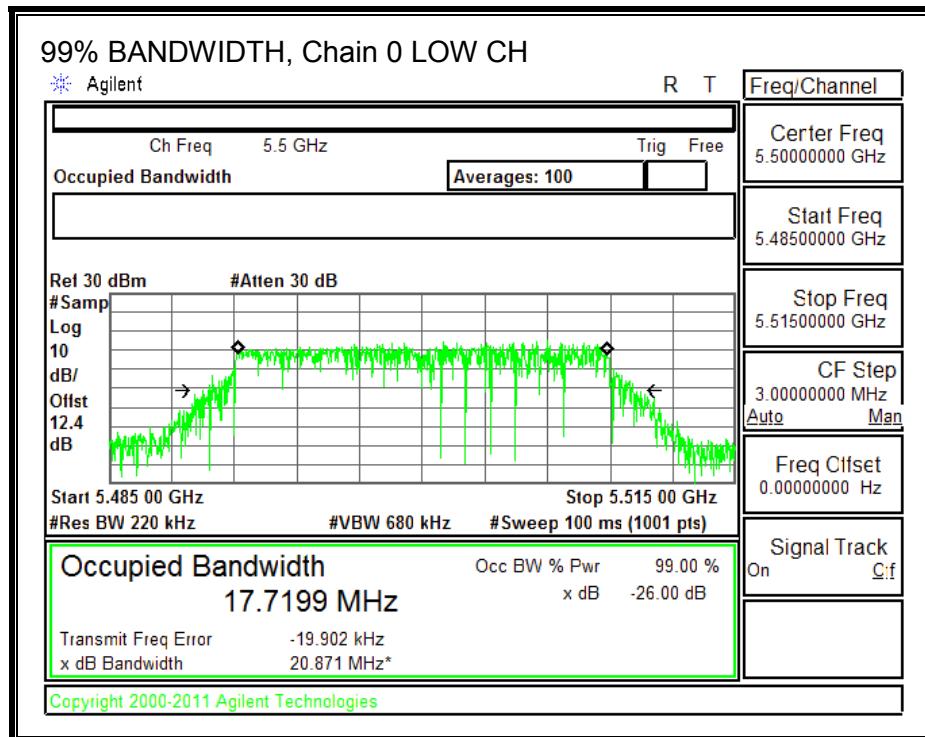

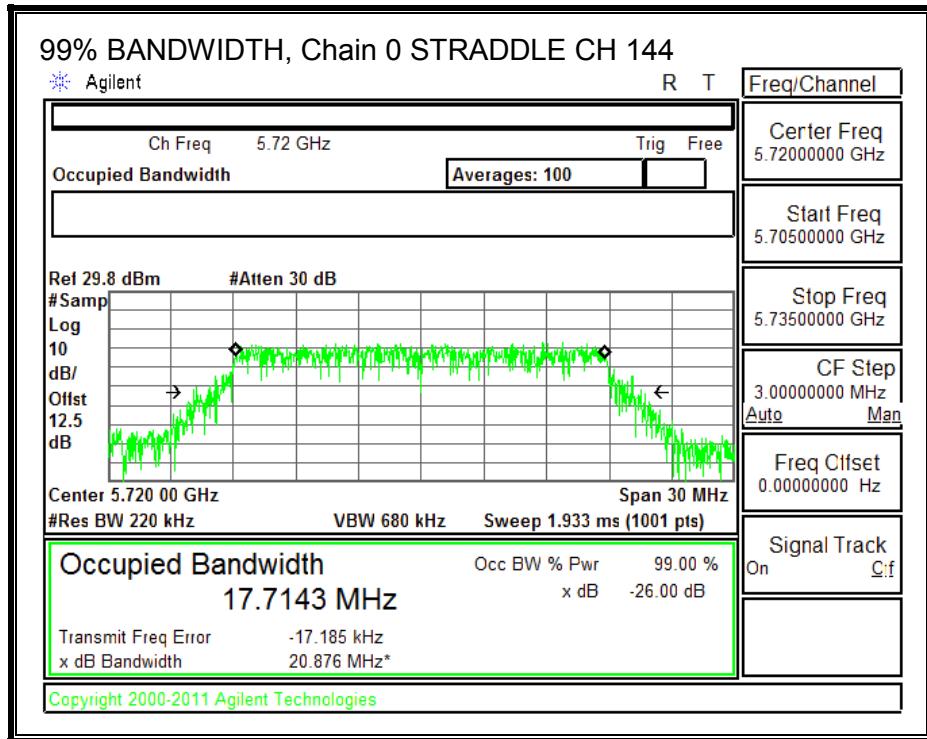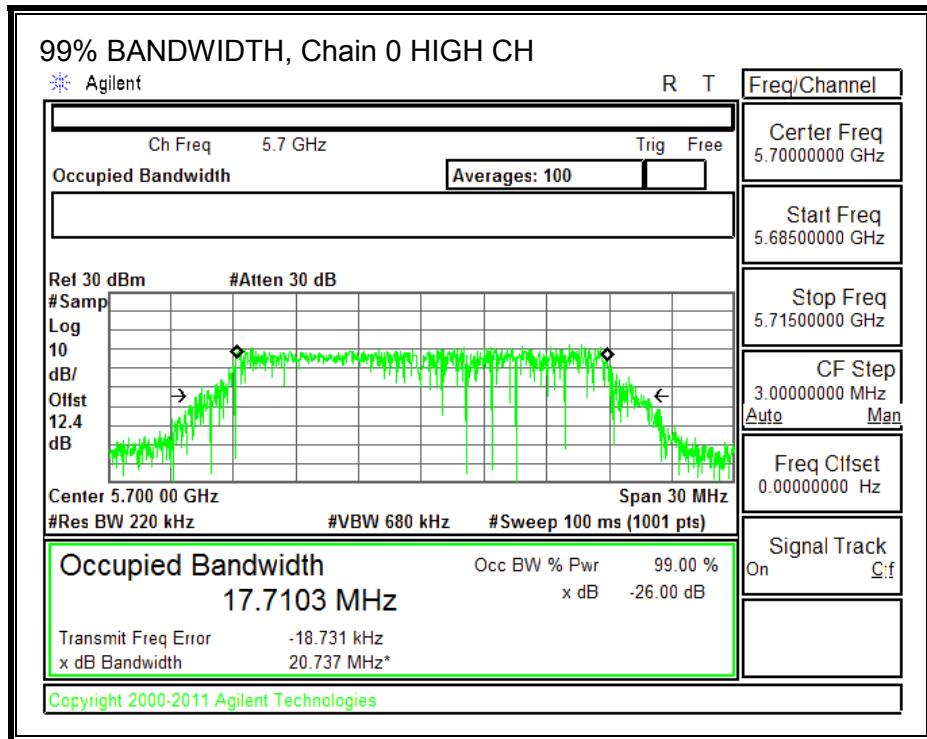

99% BANDWIDTH, Chain 1

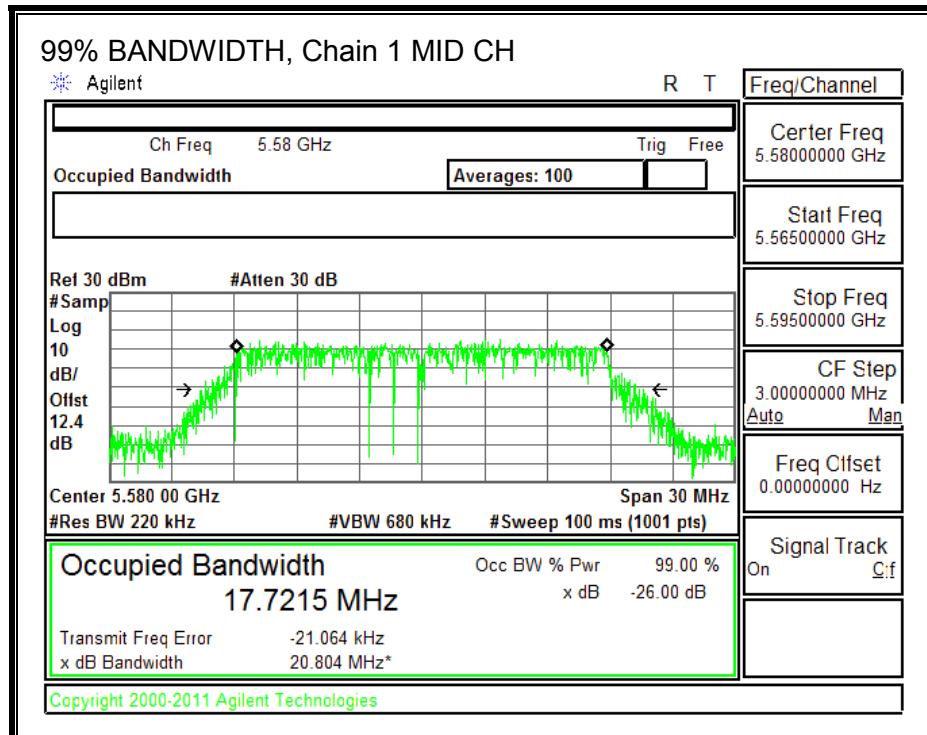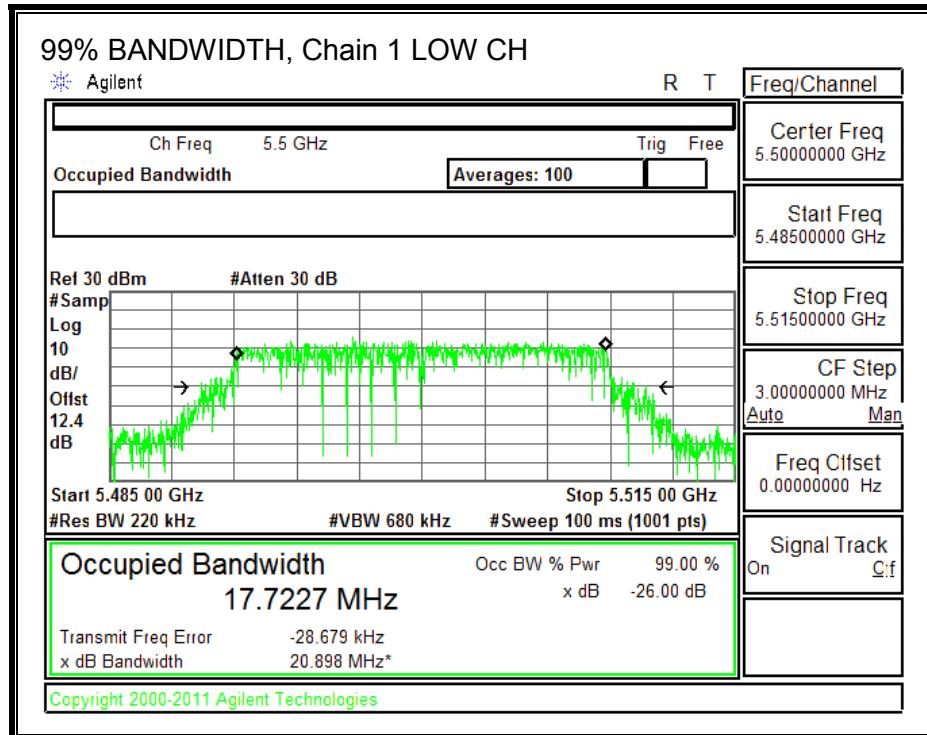

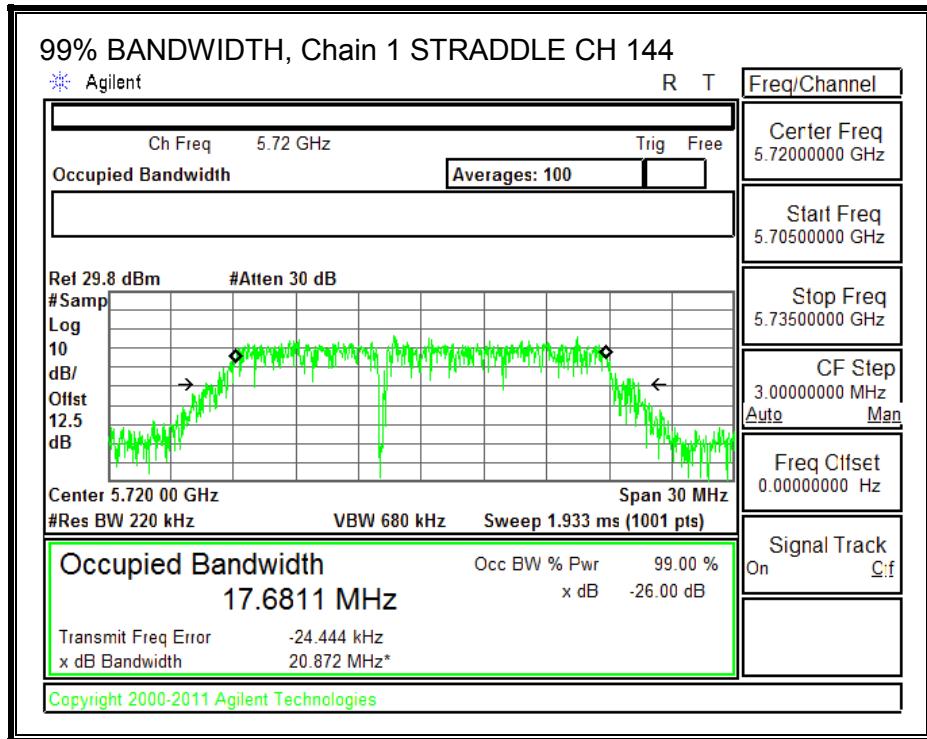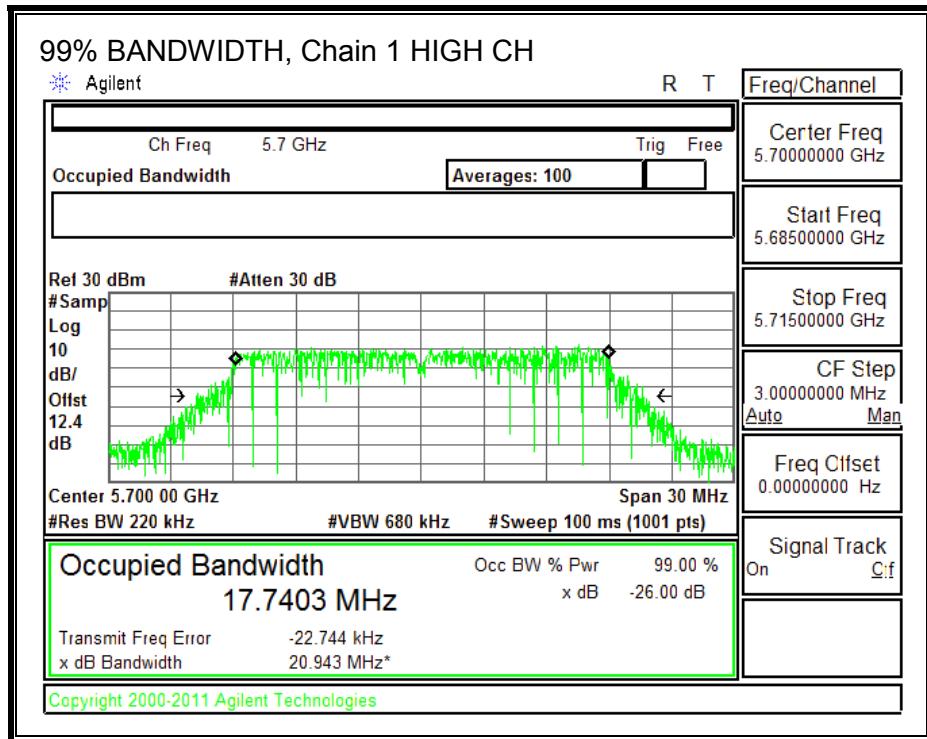

### 9.27.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
5.00	4.57	4.79

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Direction Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	21.84	4.79	4.79	24.00	11.00
Mid	5600	21.87	4.79	4.79	24.00	11.00
High	5700	21.84	4.79	4.79	24.00	11.00
144	5720	21.78	4.79	4.79	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



### Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	16.80	16.81	19.82	24.00	-4.18
Mid	5600	16.95	16.98	19.98	24.00	-4.02
High	5700	16.30	16.27	19.30	24.00	-4.70
144	5720	16.48	16.50	19.50	24.00	-4.50

### PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	4.27	6.32	8.42	11.00	-2.58
Mid	5600	6.28	6.52	9.41	11.00	-1.59
High	5700	5.89	6.76	9.36	11.00	-1.64



**PSD, Chain 0**

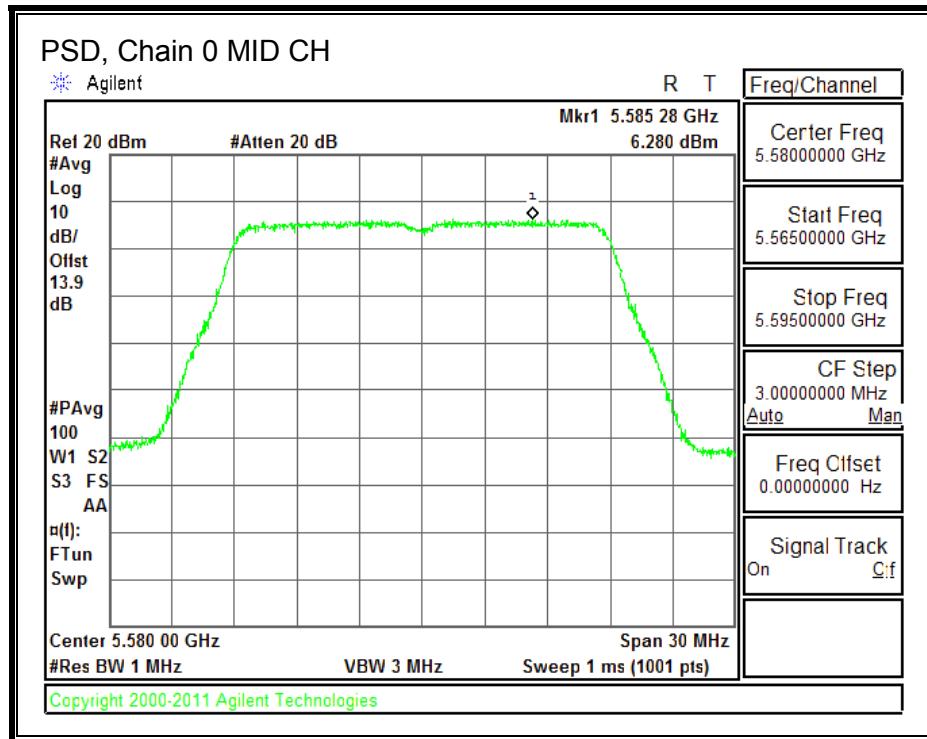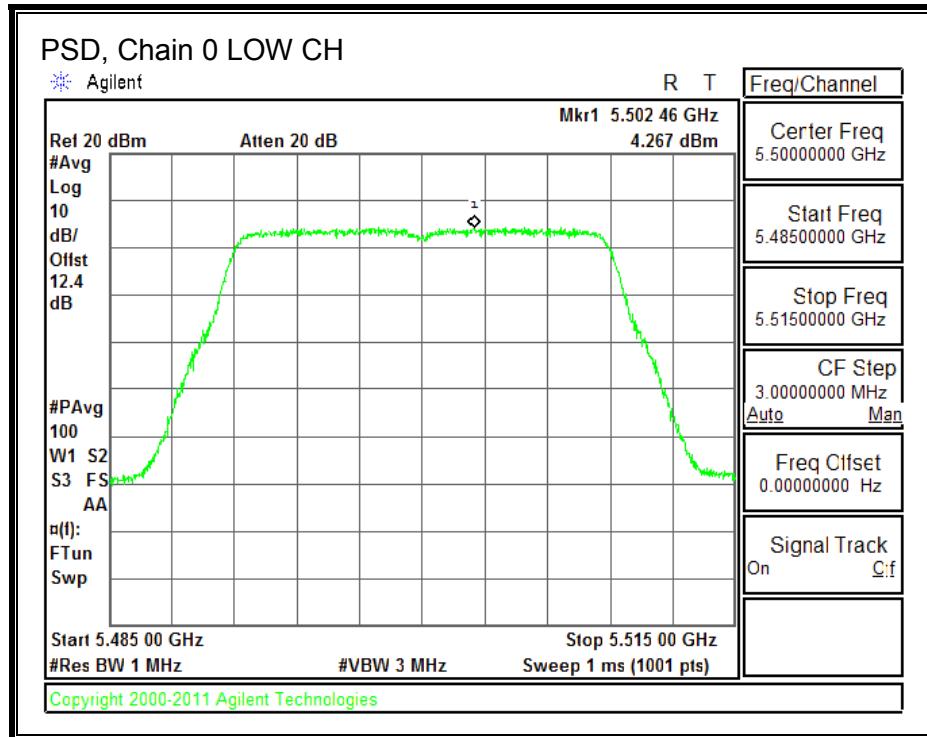

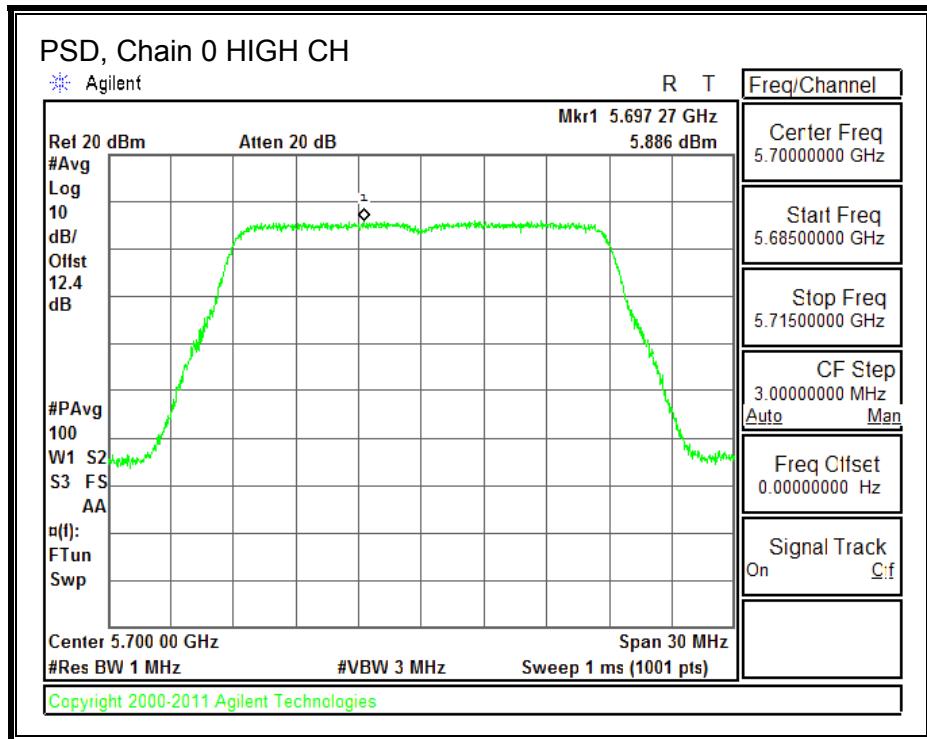

### PSD, Chain 1

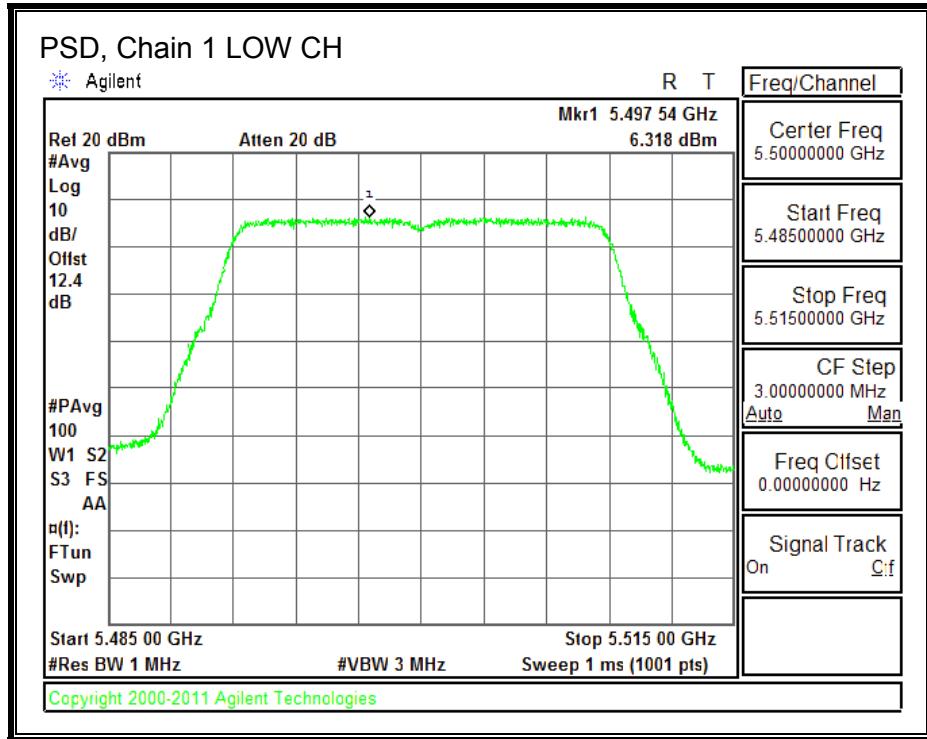

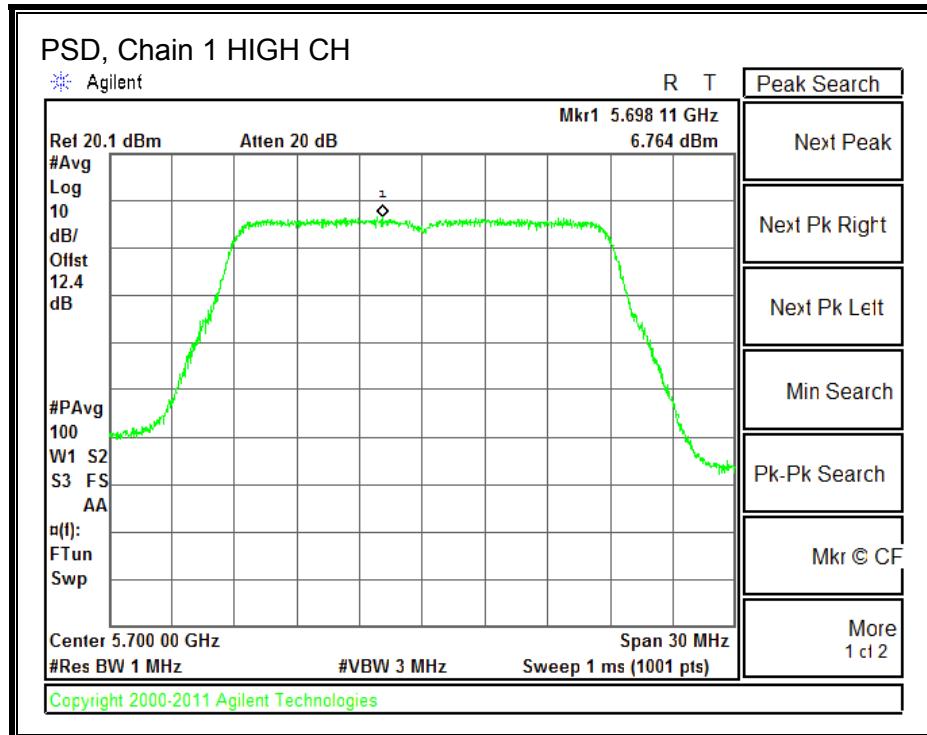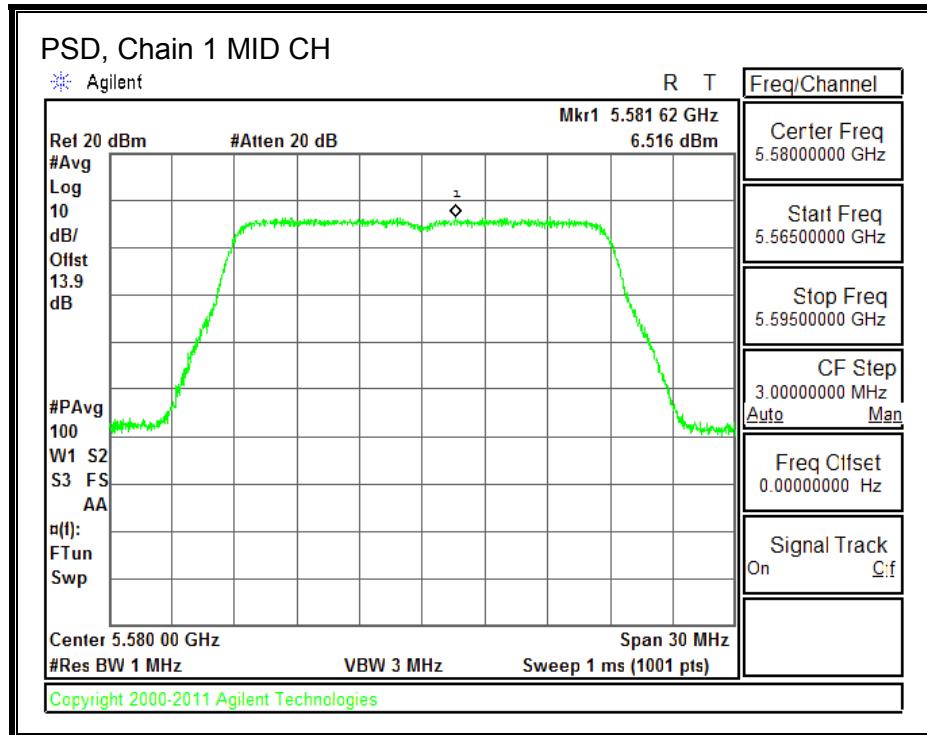

**STRADDLE CHANNEL 144 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	15.89	4.79	4.79	23.01	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	15.85	16.01	18.94	23.01	-4.07

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	5.62	5.62	8.63	11.00	-2.37

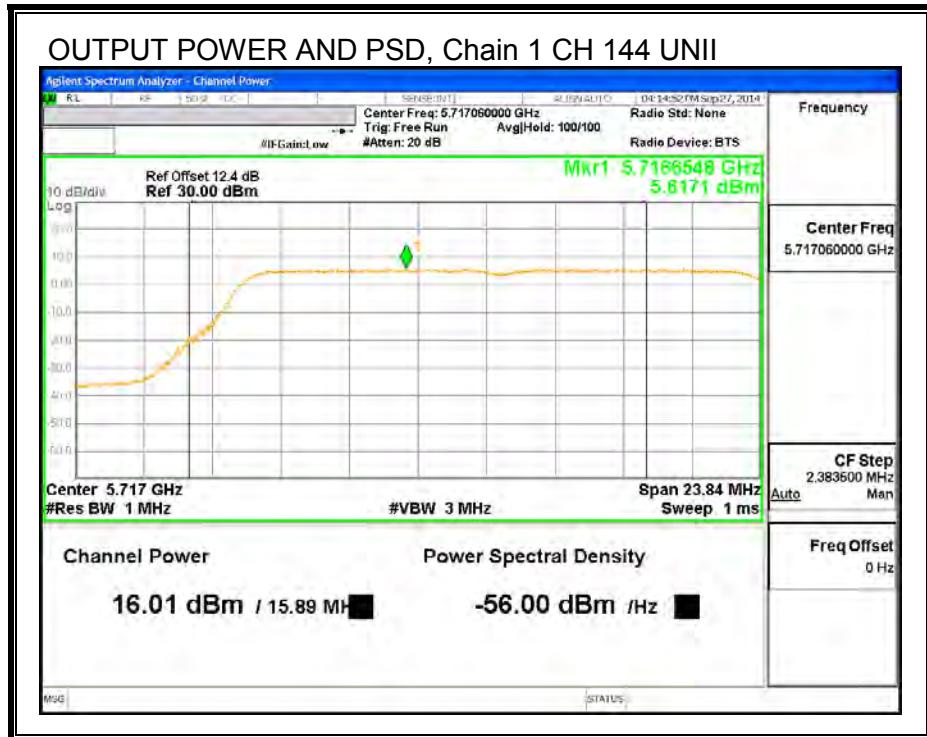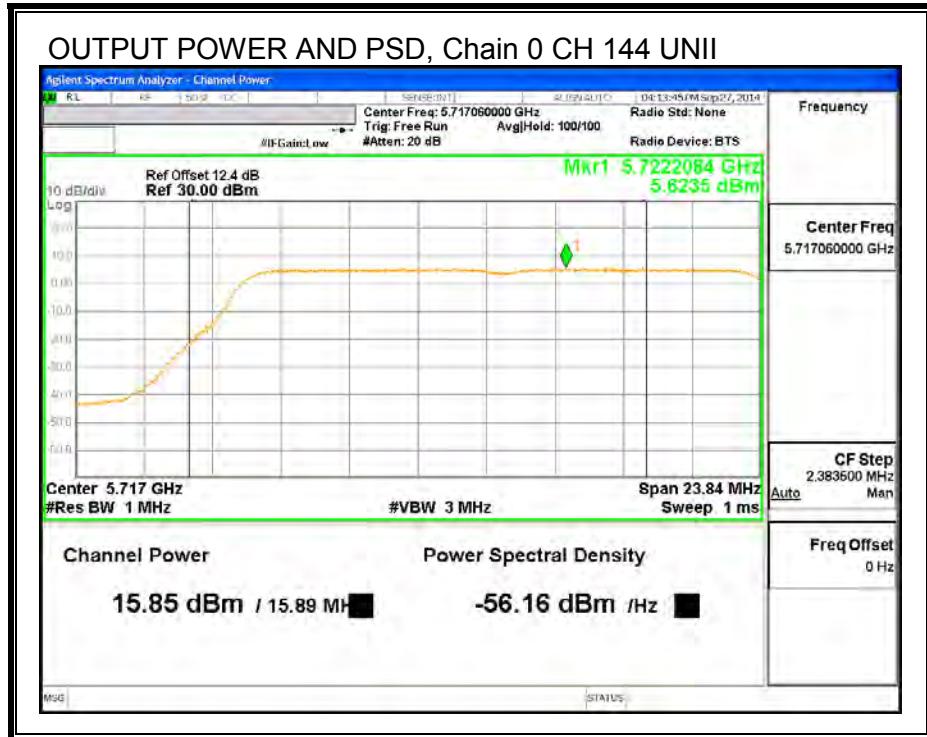

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	4.79	30.00	30.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	10.36	10.45	13.42	30.00	-16.58

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	2.33	2.01	5.18	30.00	-24.82

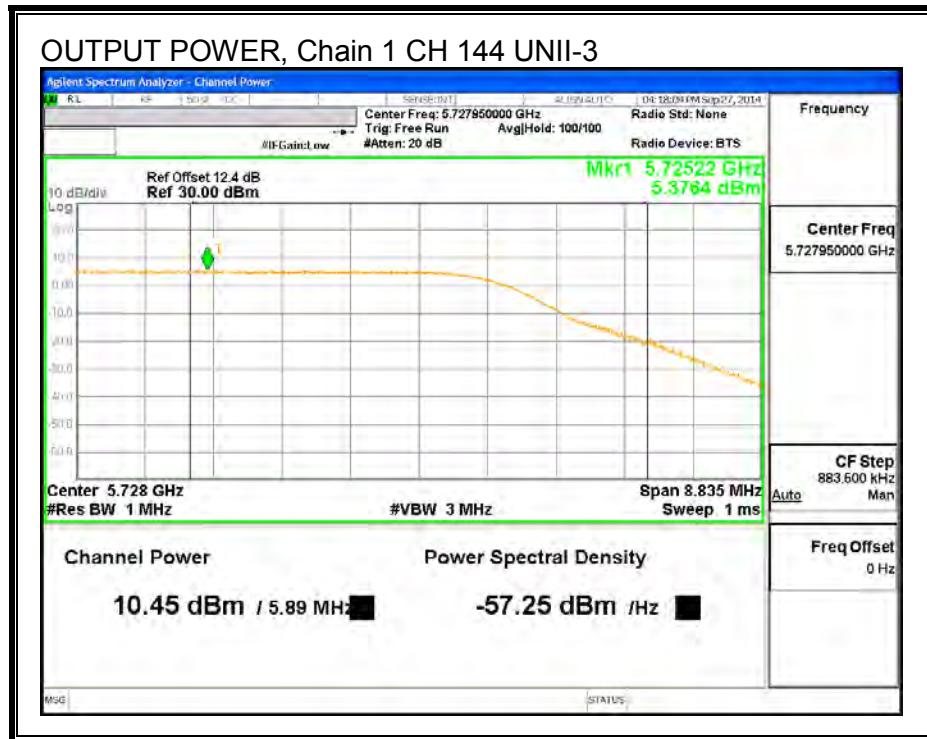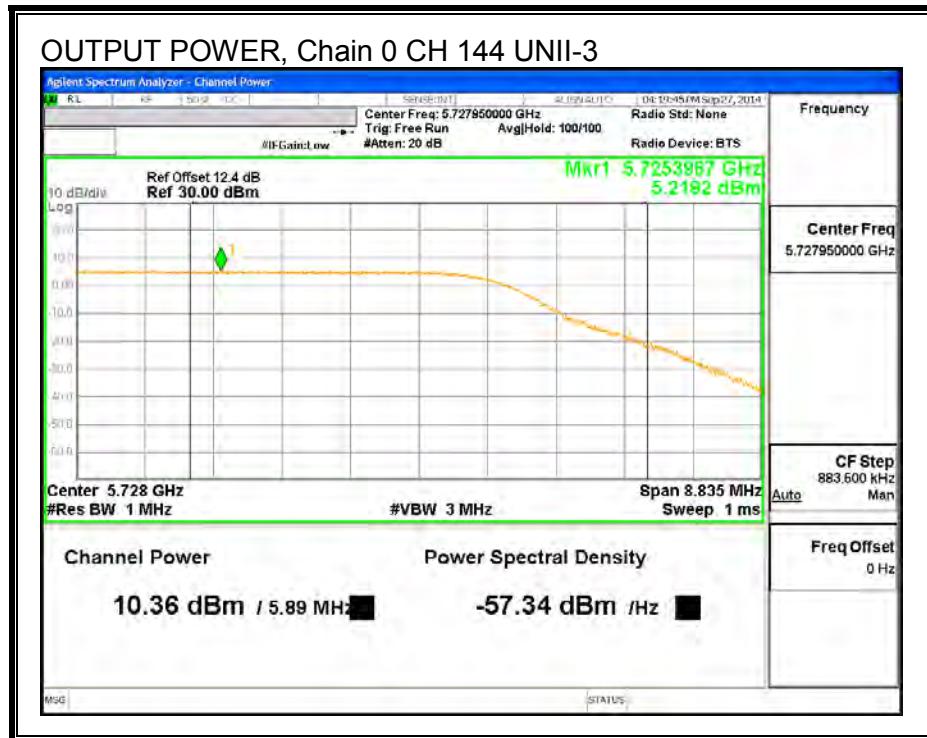

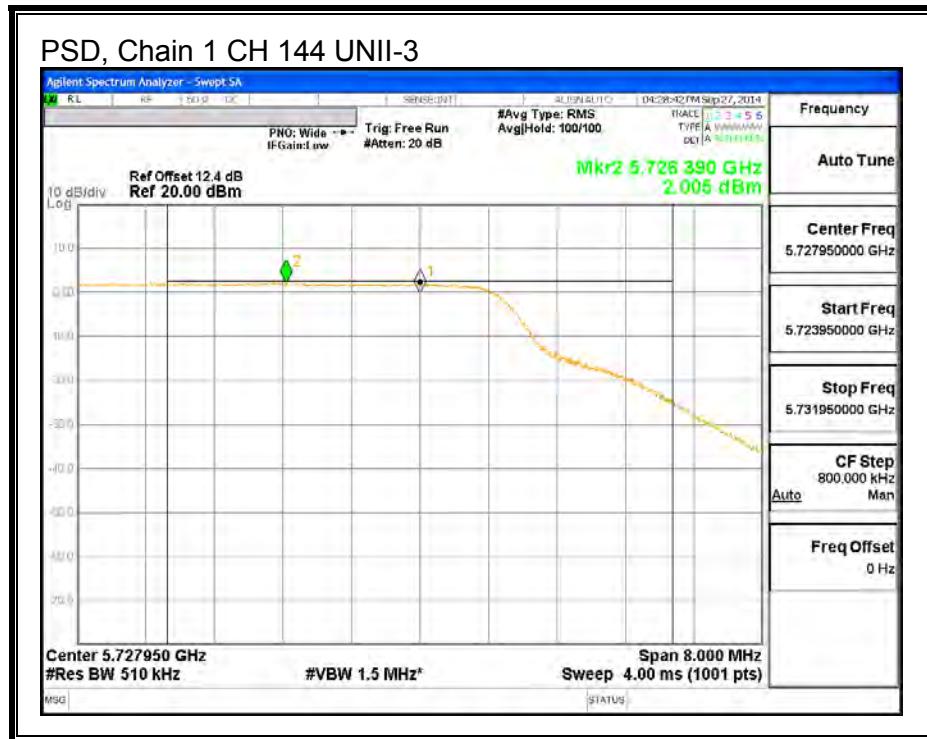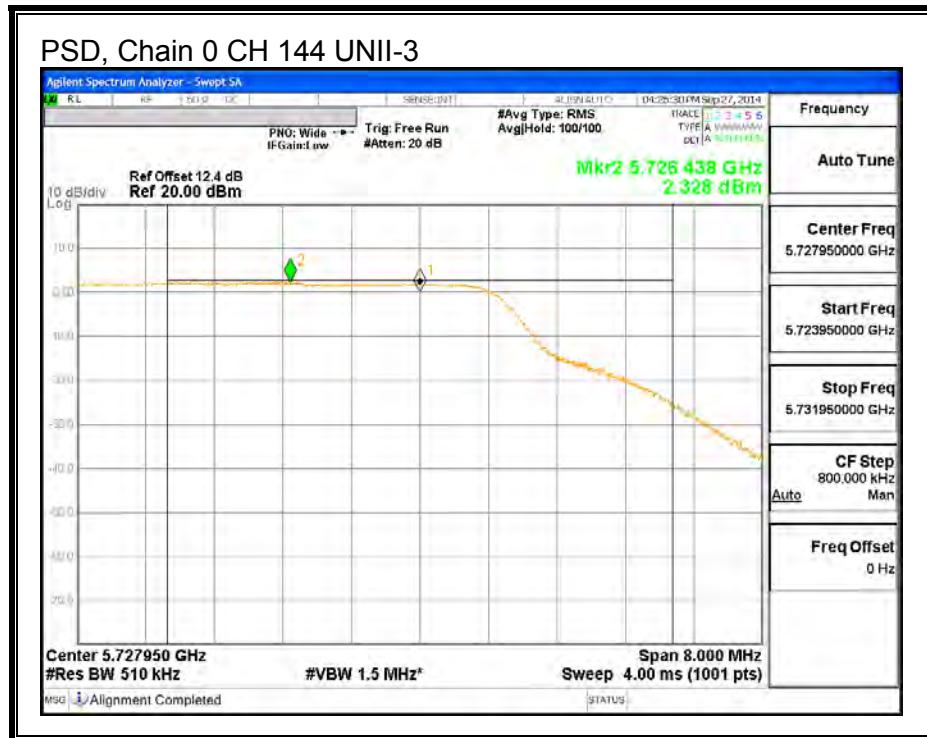

## 9.28. 802.11ac VHT20 2TX BF IN THE 5.6 GHz BAND

Refer to Section 9.26, 802.11n HT20 2TX CDD MODE IN THE 5.6 GHz BAND

The power per chain used for 802.11n HT20 2TX CDD IN THE 5.6 GHz mode is the same power per chain that will be for 802.11n HT20 2TX BF IN THE 5.6 GHz mode. However, since BF is correlated and CDD is uncorrelated for output power, the section below for output power using correlated antenna gain for this mode shows it is still compliant.

### 9.28.1. OUTPUT POWER

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
5.00	4.57	7.80

## RESULTS

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Direction Gain for Power (dBi)	Power Limit (dBm)
Low	5500	21.80	7.80	22.20
Mid	5600	21.95	7.80	22.20
High	5700	21.95	7.80	22.20
144	5720	21.90	7.80	22.20

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power
--------------------	------	--

### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	14.25	14.39	17.45	22.20	-4.75
Mid	5600	14.24	14.29	17.40	22.20	-4.80
High	5700	14.25	14.23	17.37	22.20	-4.83
144	5720	14.50	14.48	17.62	22.20	-4.58

**STRADDLE CHANNEL 144 RESULTS**

**UNII-2C BAND**



**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	15.92	7.80	7.80	21.22	9.20

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	13.36	13.42	16.52	21.22	-4.70

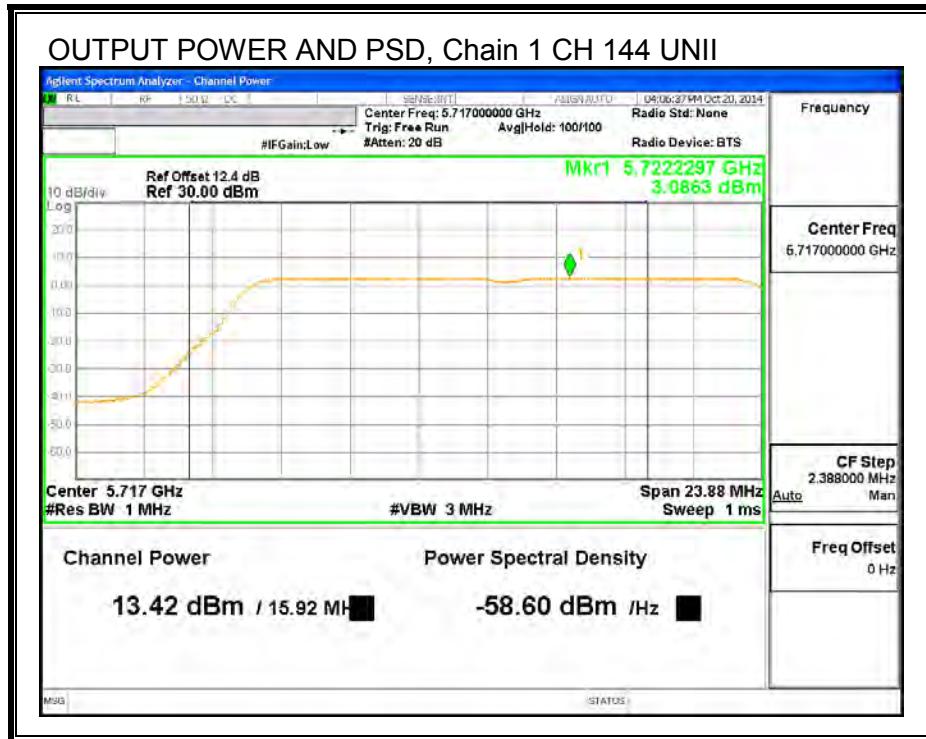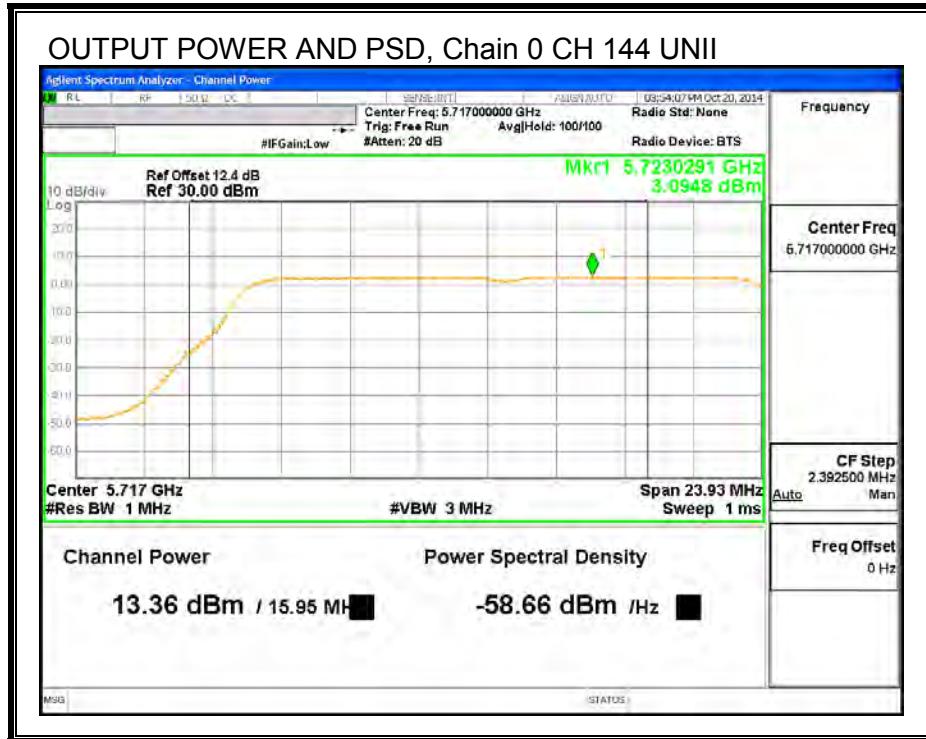

**UNII-3 BAND**



**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	7.80	28.20	28.20

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	7.84	7.80	10.95	28.20	-17.25

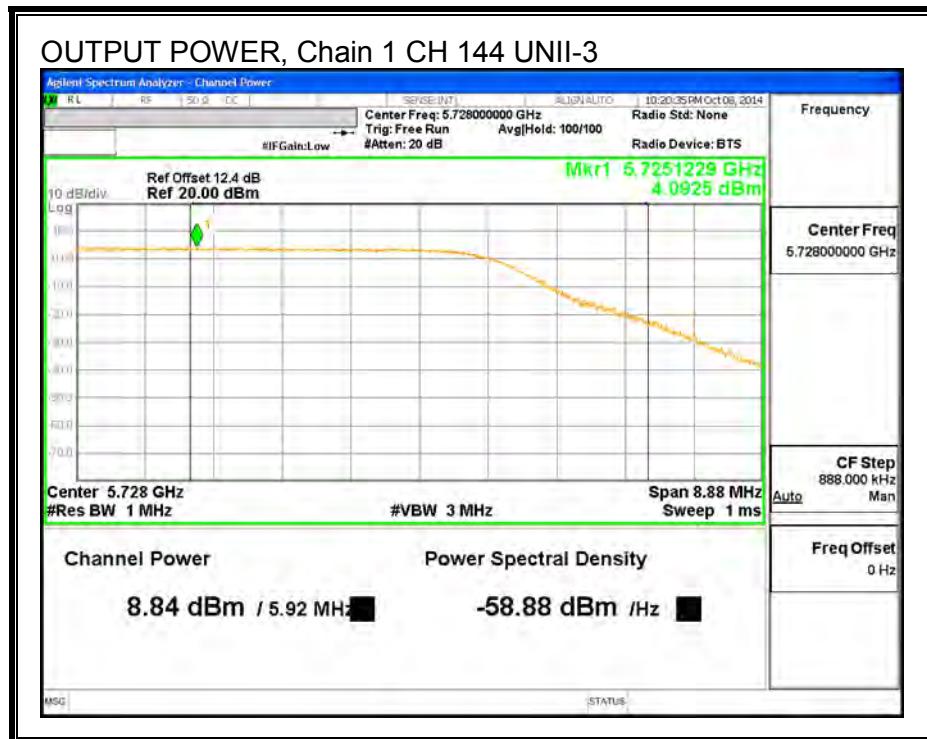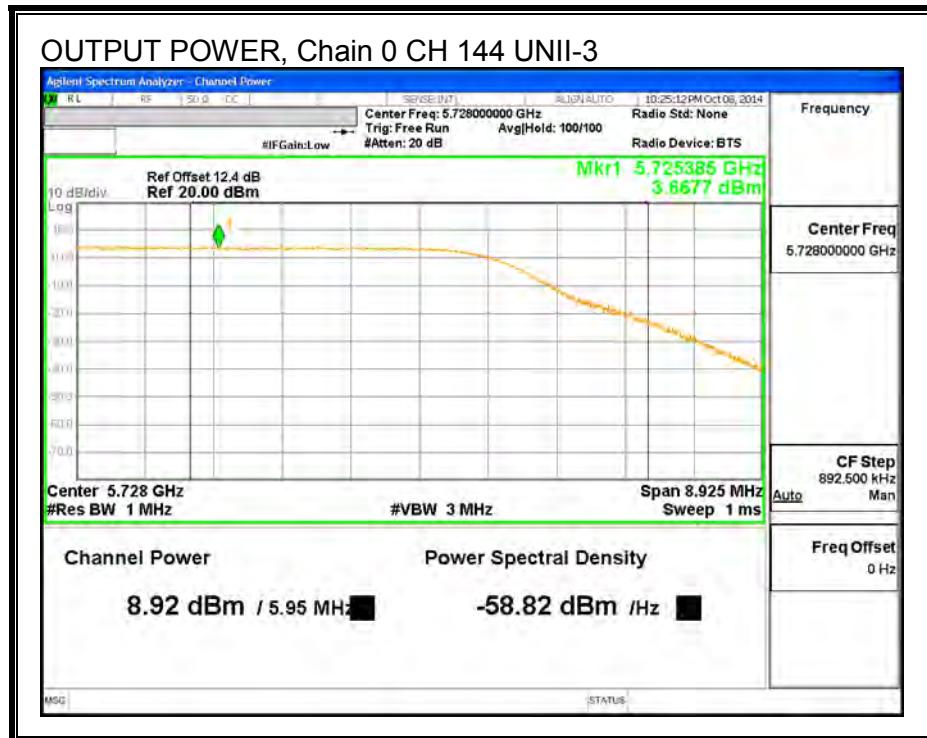

## 9.29. 802.11n HT40 1TX MODE IN THE 5.6 GHz BAND

### 9.29.1. 26 dB BANDWIDTH



#### LIMITS



None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5510	40.38
Mid	5550	40.38
High	5670	40.20
142	5710	40.38

**26 dB BANDWIDTH**

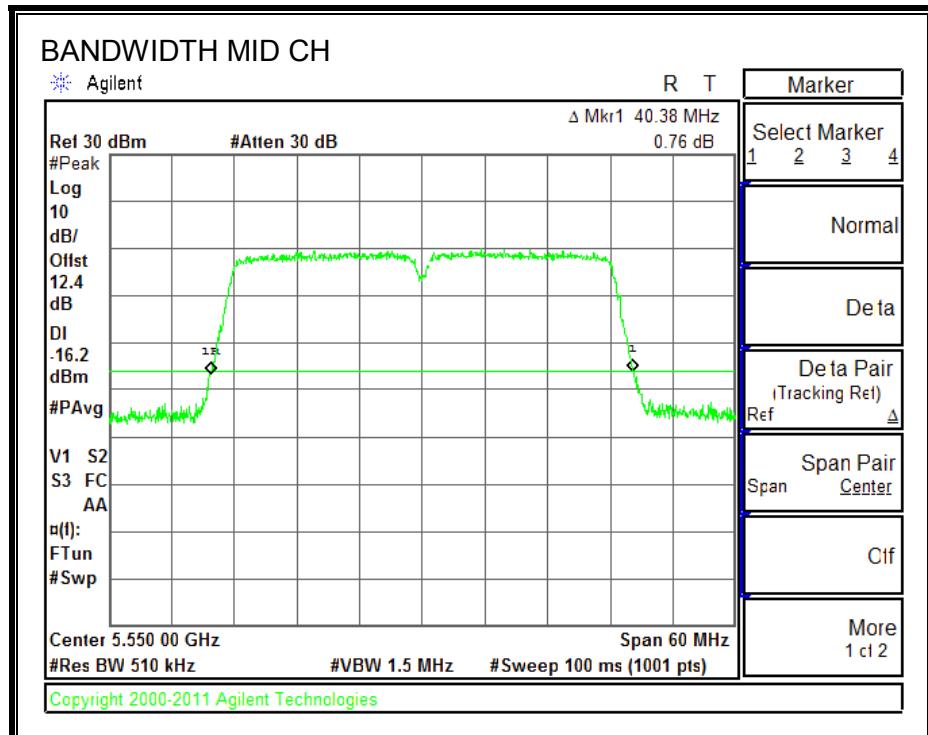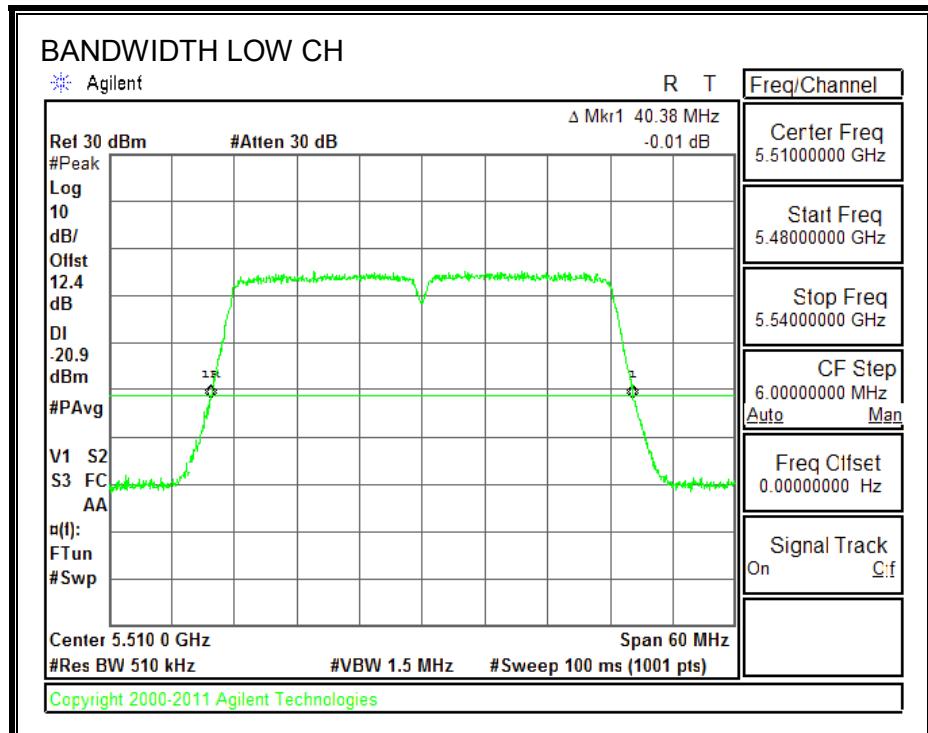

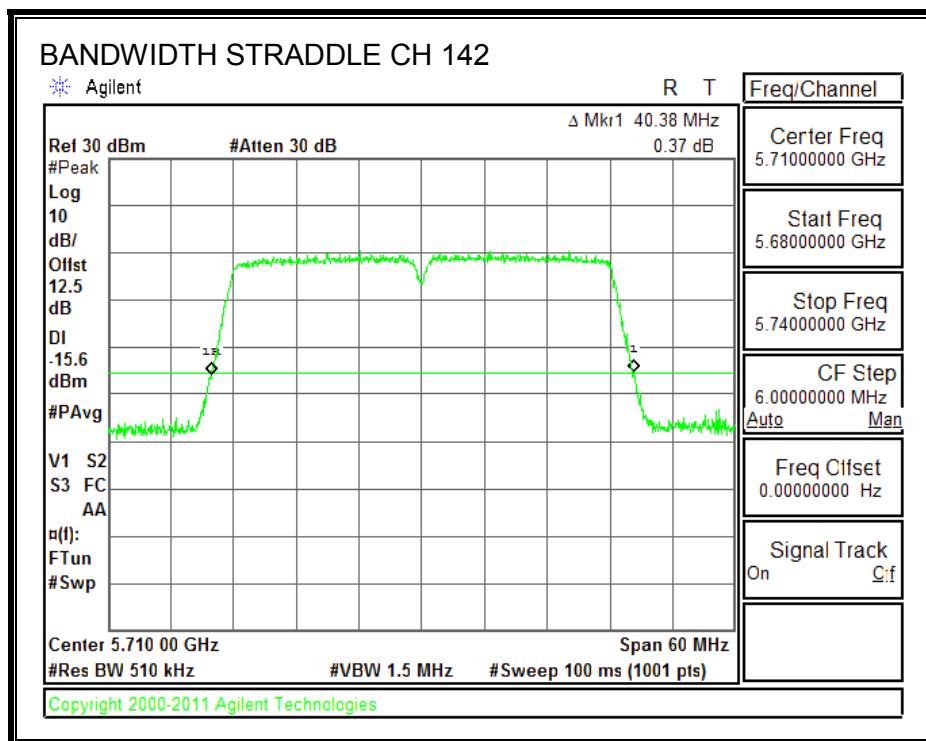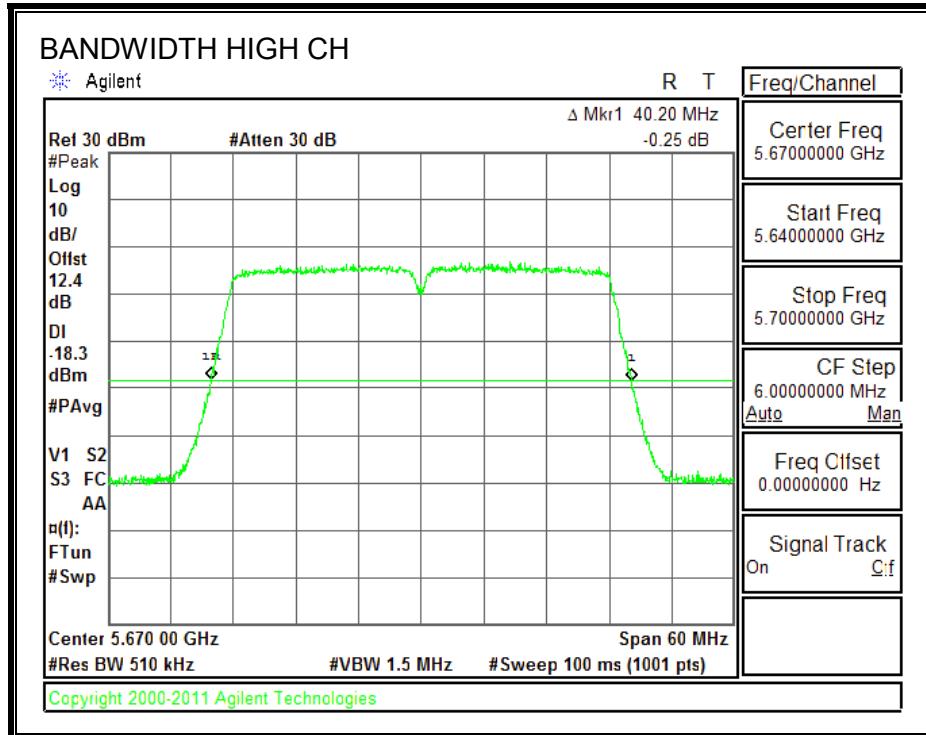

## 9.29.2. 99% BANDWIDTH



### LIMITS



None; for reporting purposes only.

### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5510	36.2027
Mid	5550	36.2177
High	5670	36.2106
142	5710	36.2153

**99% BANDWIDTH**

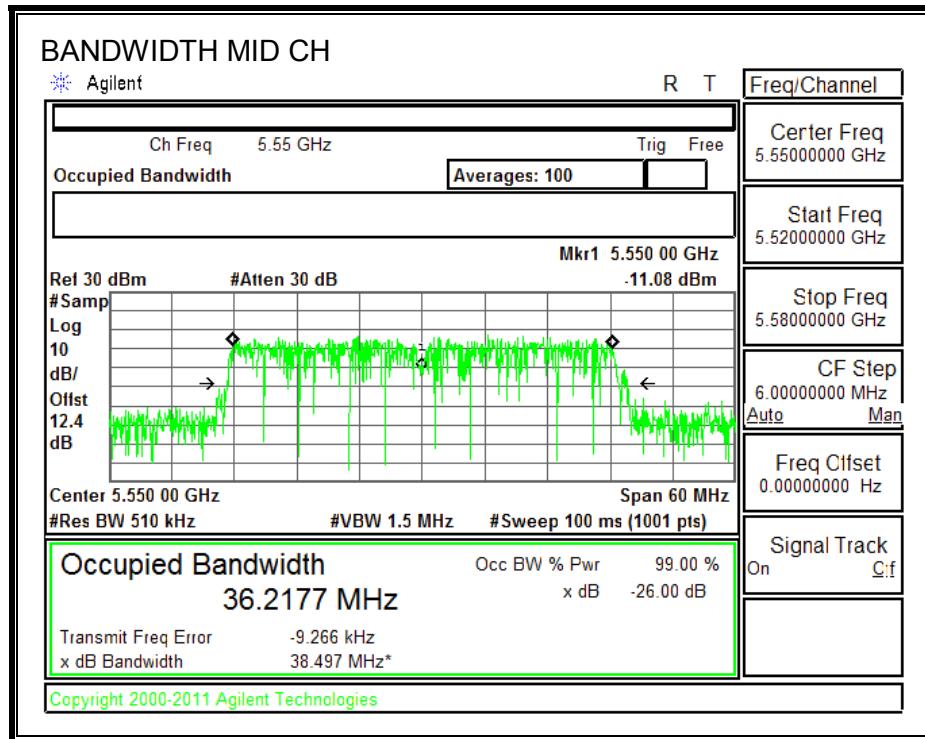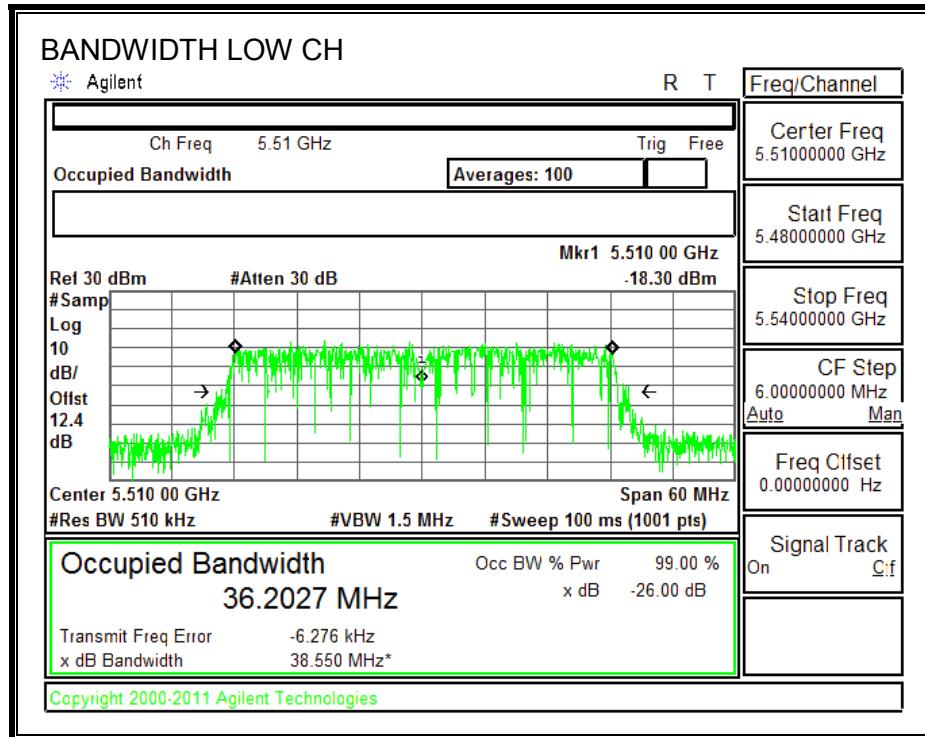

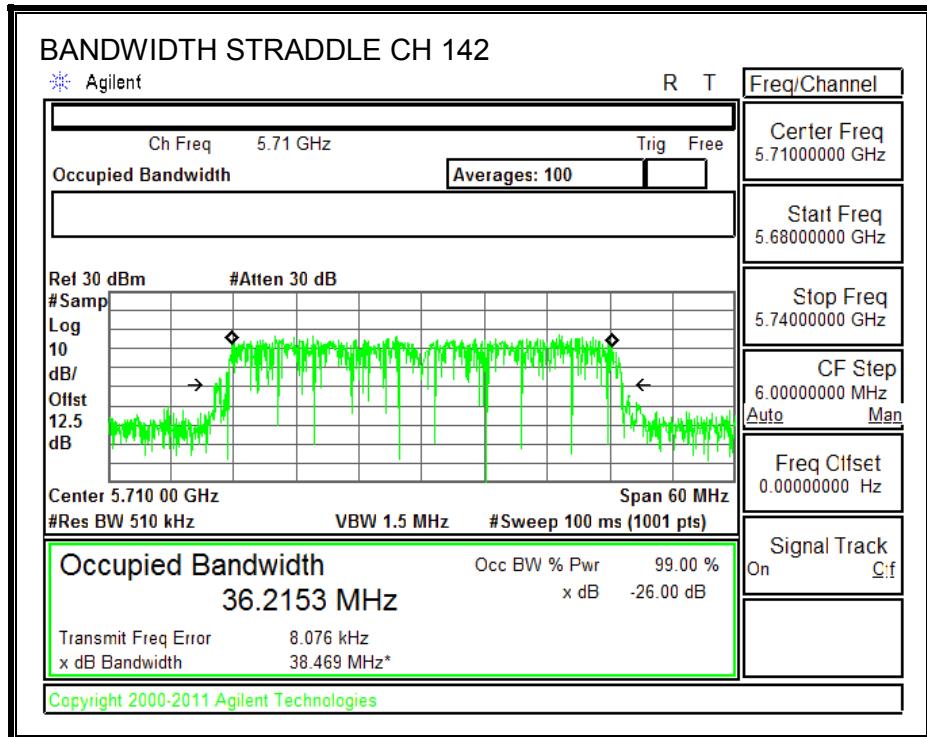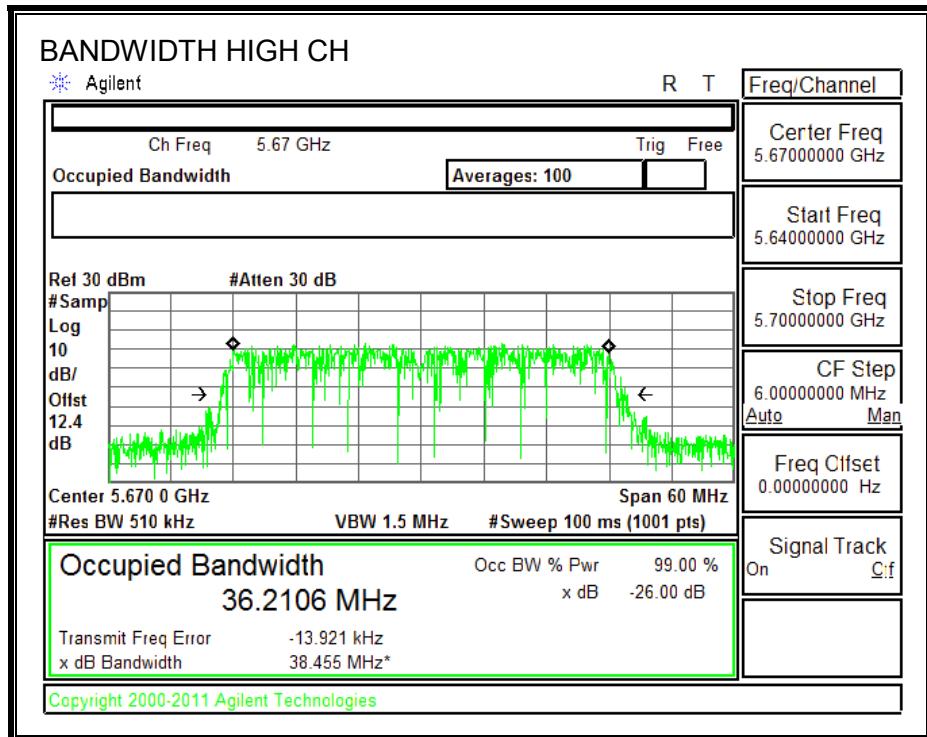

### 9.29.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### ANTENNA 0

Antenna Gain (dBi)
5.00

#### ANTENNA 1

Antenna Gain (dBi)
4.57

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.38	5.00	24.00	11.00
Mid	5590	40.38	5.00	24.00	11.00
High	5670	40.20	5.00	24.00	11.00
142	5710	40.38	5.00	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



### Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	15.97	15.97	24.00	-8.03
Mid	5550	17.97	17.97	24.00	-6.03
High	5670	17.98	17.98	24.00	-6.02
142	5710	18.00	18.00	24.00	-6.00

### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	2.90	2.90	11.00	-8.10
Mid	5550	4.97	4.97	11.00	-6.03
High	5670	4.67	4.67	11.00	-6.33

**PSD, Chain 0**

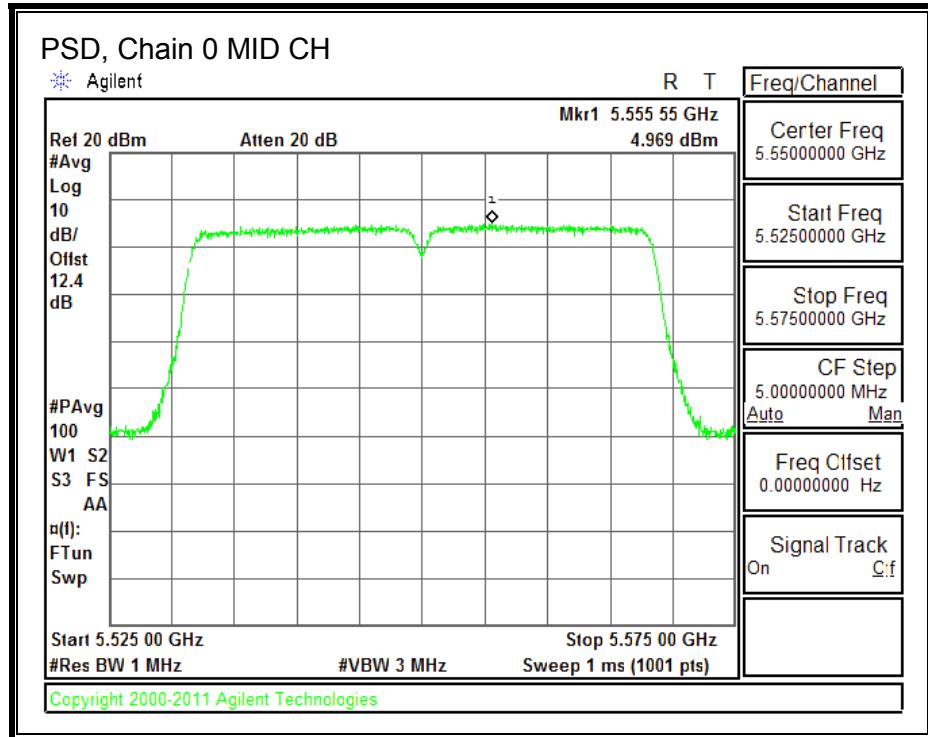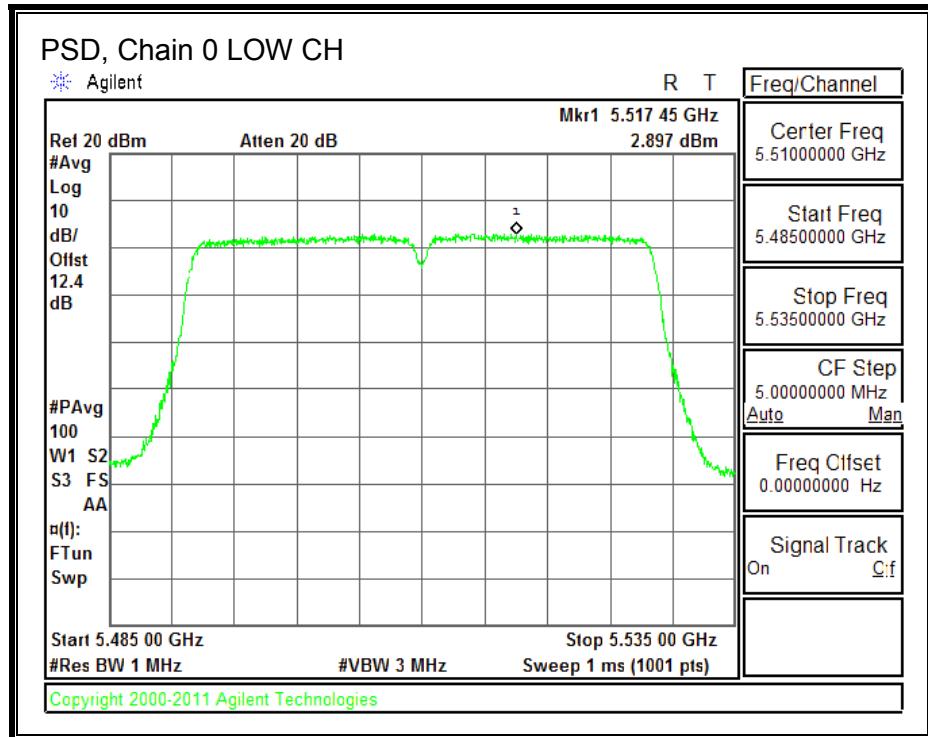

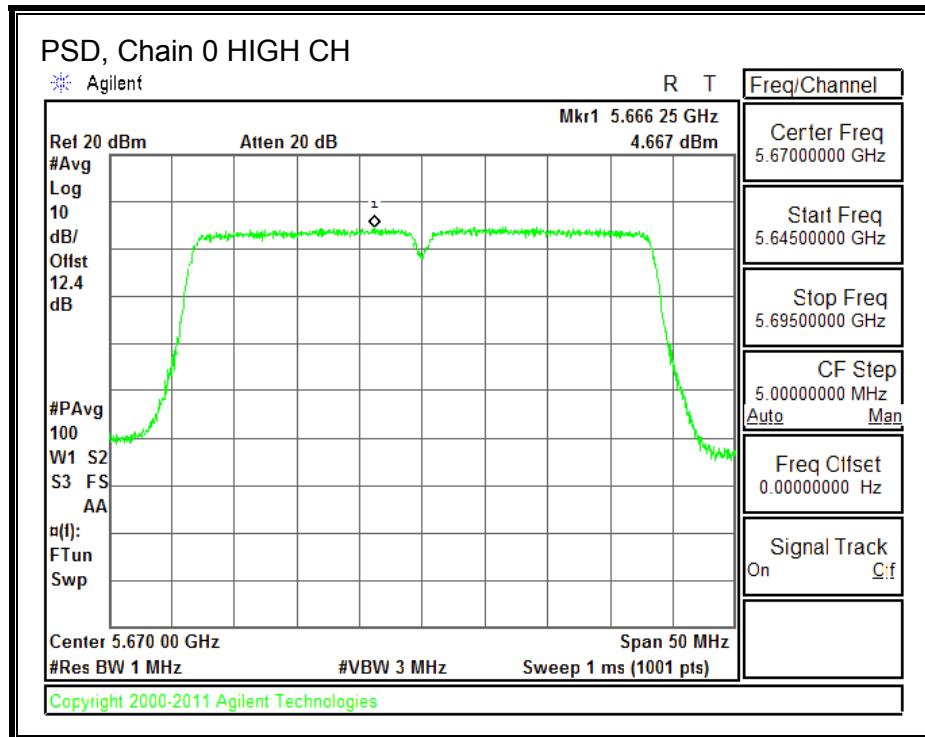

**STRADDLE CH 142 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	35.19	5.00	5.00	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	17.50	17.50	24.00	-6.50

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	3.455	3.46	11.00	-7.54

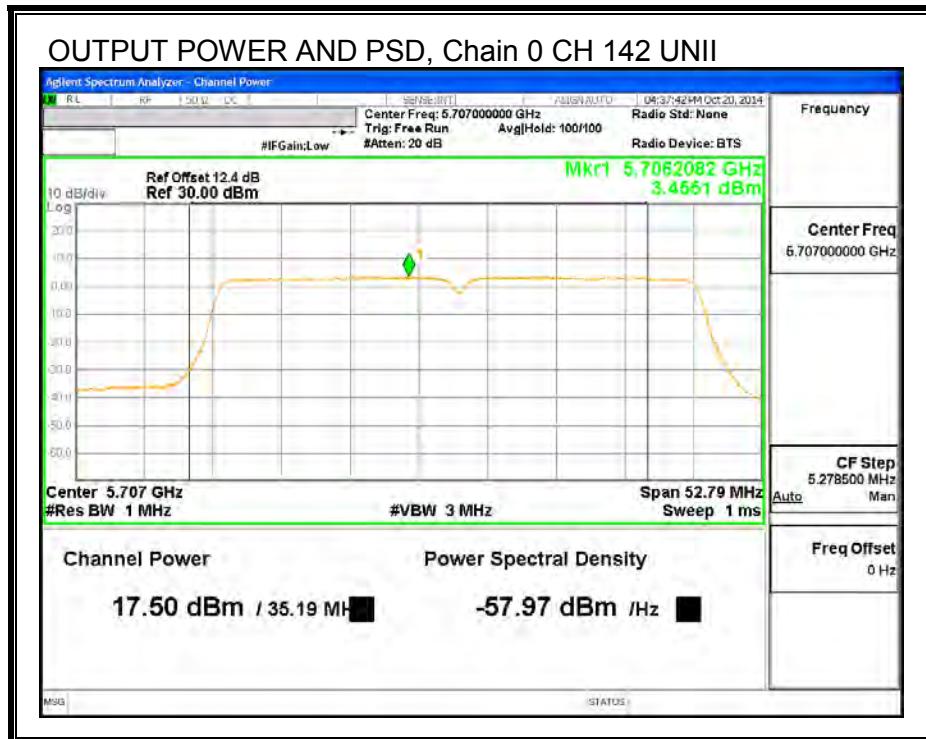

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	5.00	30.00	30.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	6.82	6.82	30.00	-23.18

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	1.20	1.20	30.00	-28.80

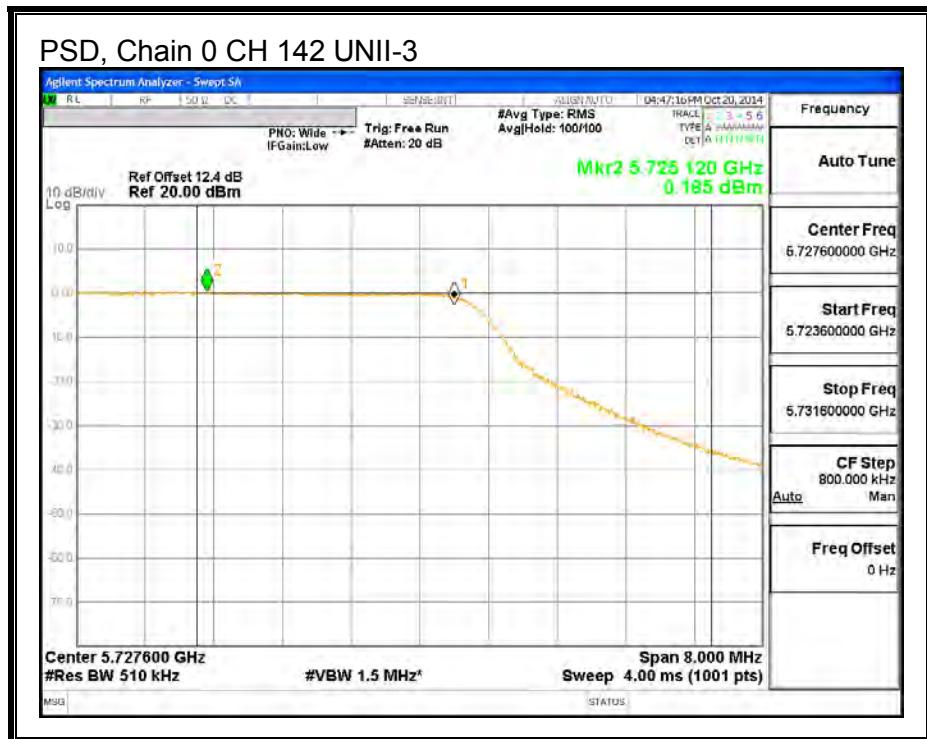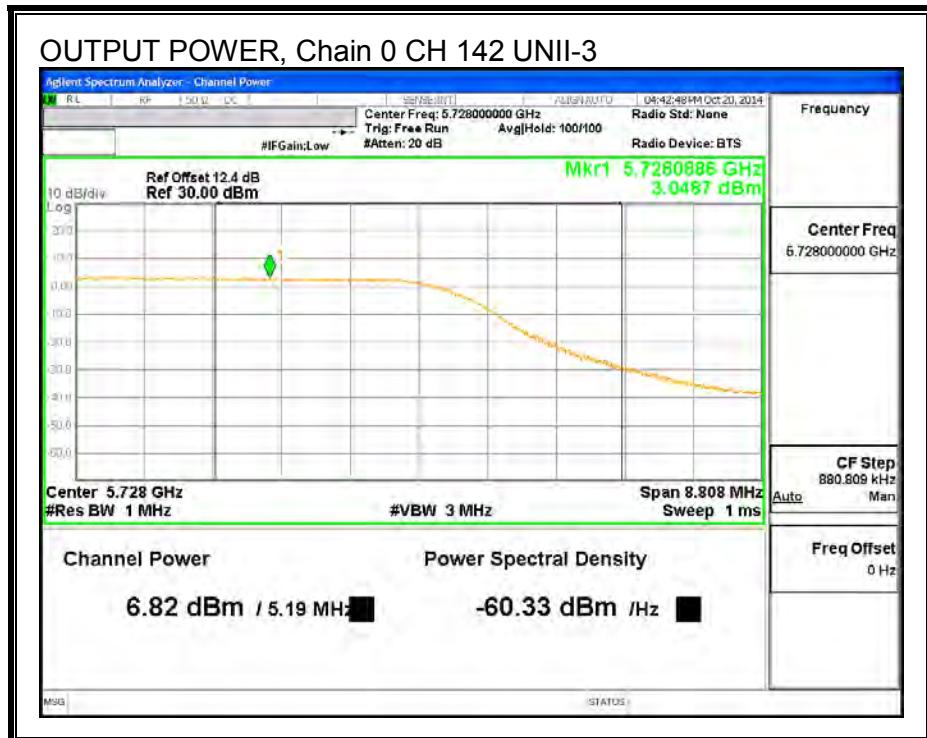

## 9.30. 802.11n HT40 2TX CDD MODE IN THE 5.6 GHz BAND

### 9.30.1. 26 dB BANDWIDTH



#### LIMITS



None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5510	40.02	40.68
Mid	5550	40.56	40.08
High	5670	40.38	40.02
142	5710	40.38	40.08



**26 dB BANDWIDTH, Chain 0**

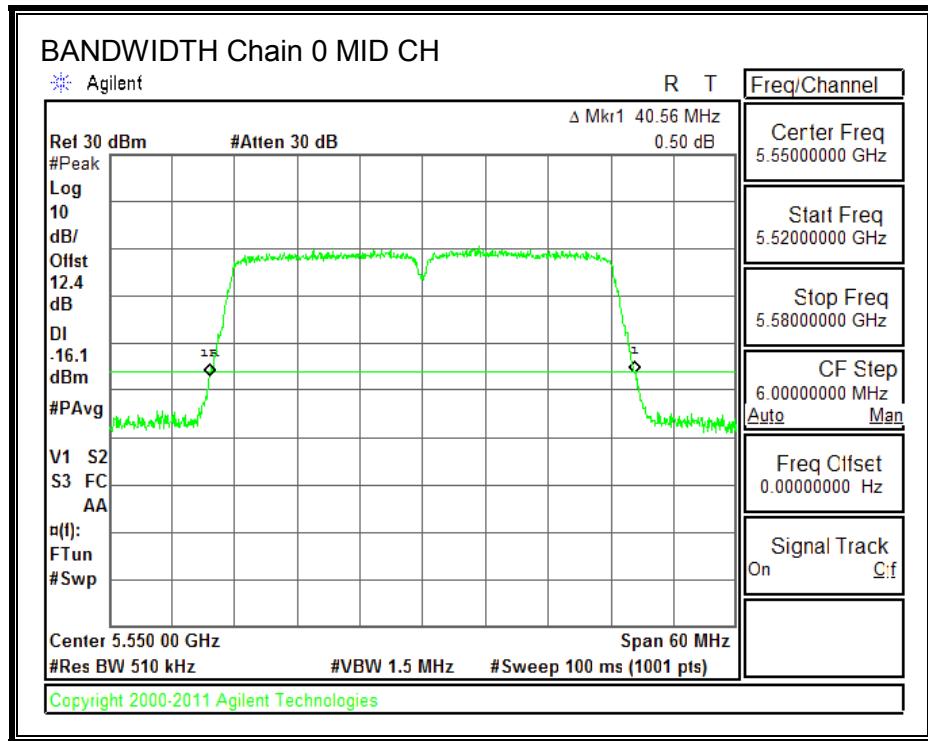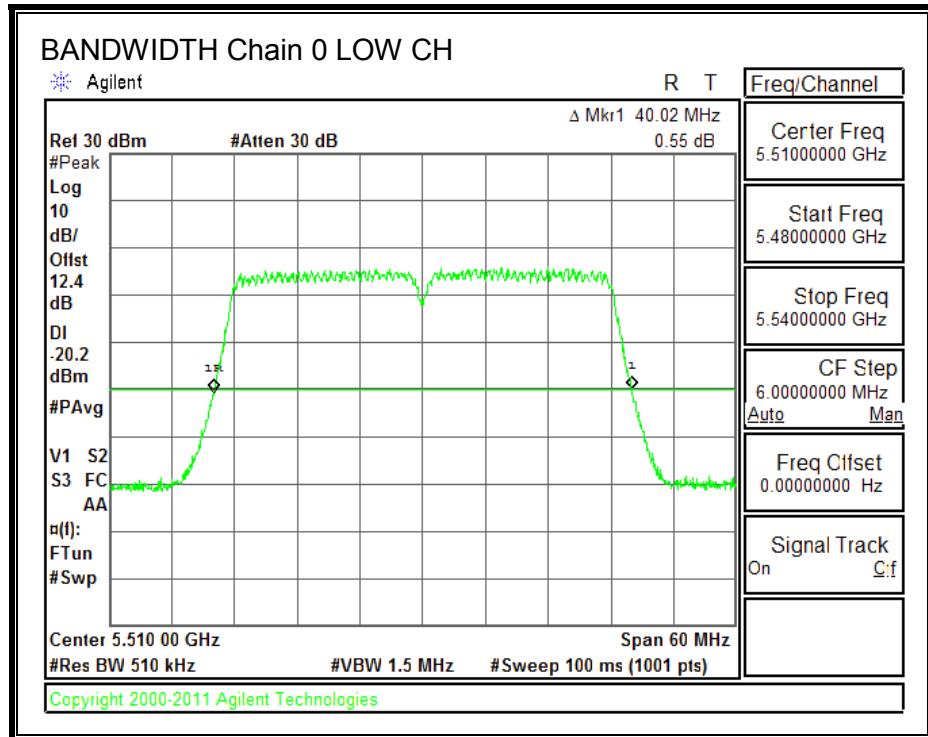

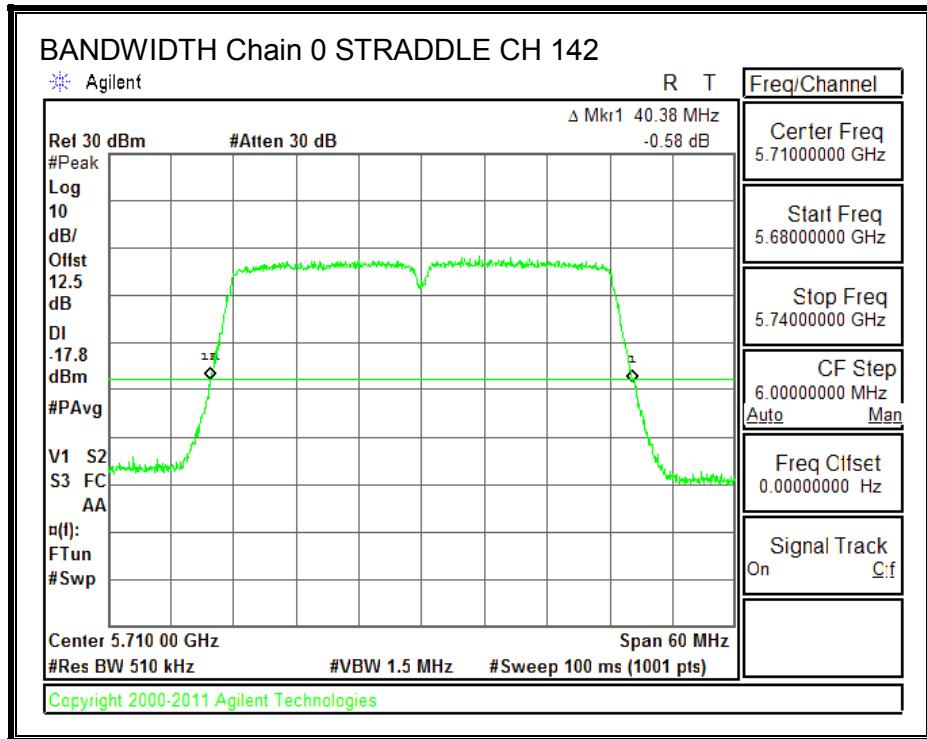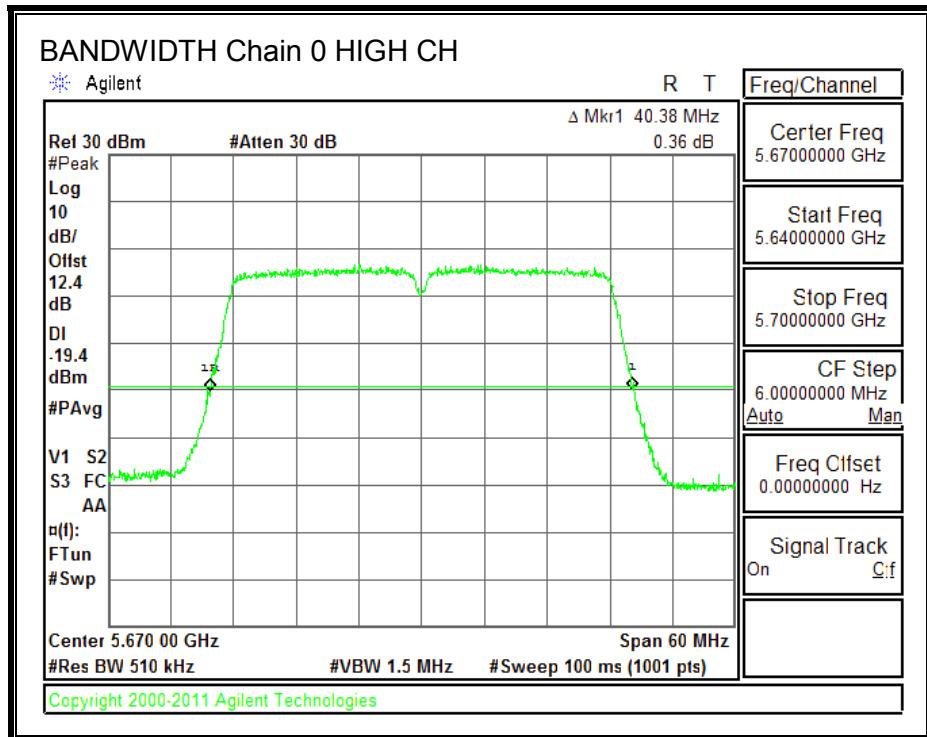

**26 dB BANDWIDTH, Chain 1**

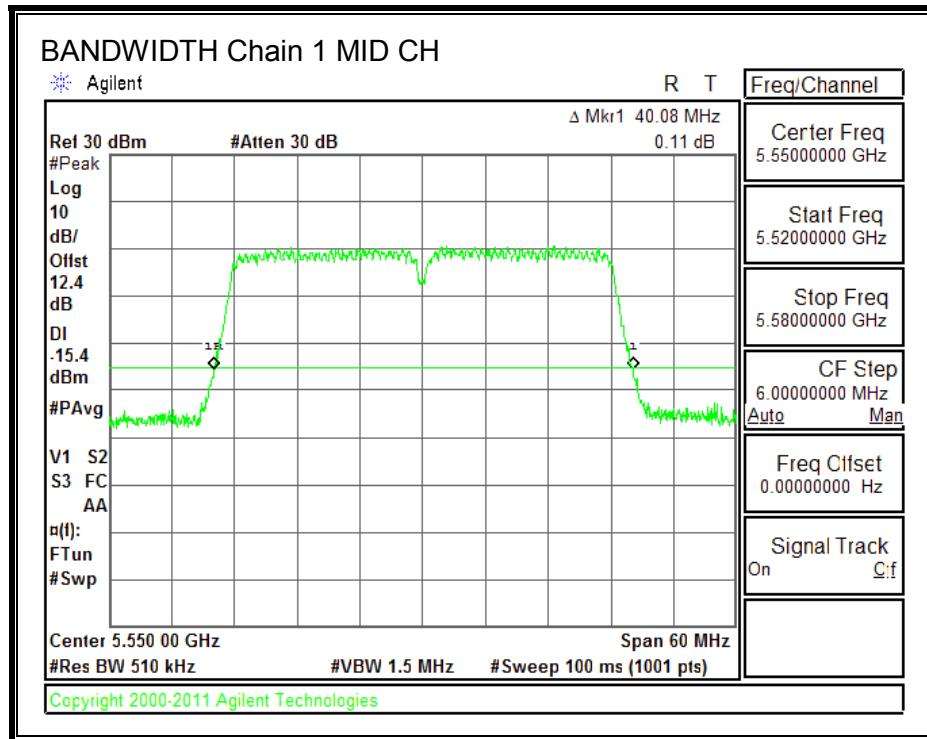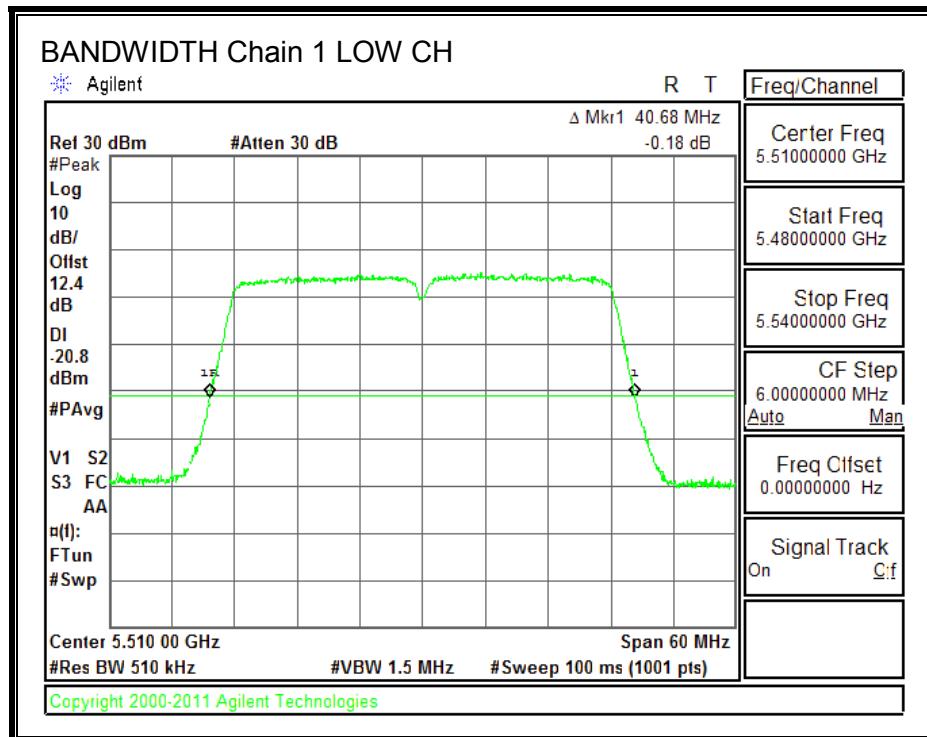

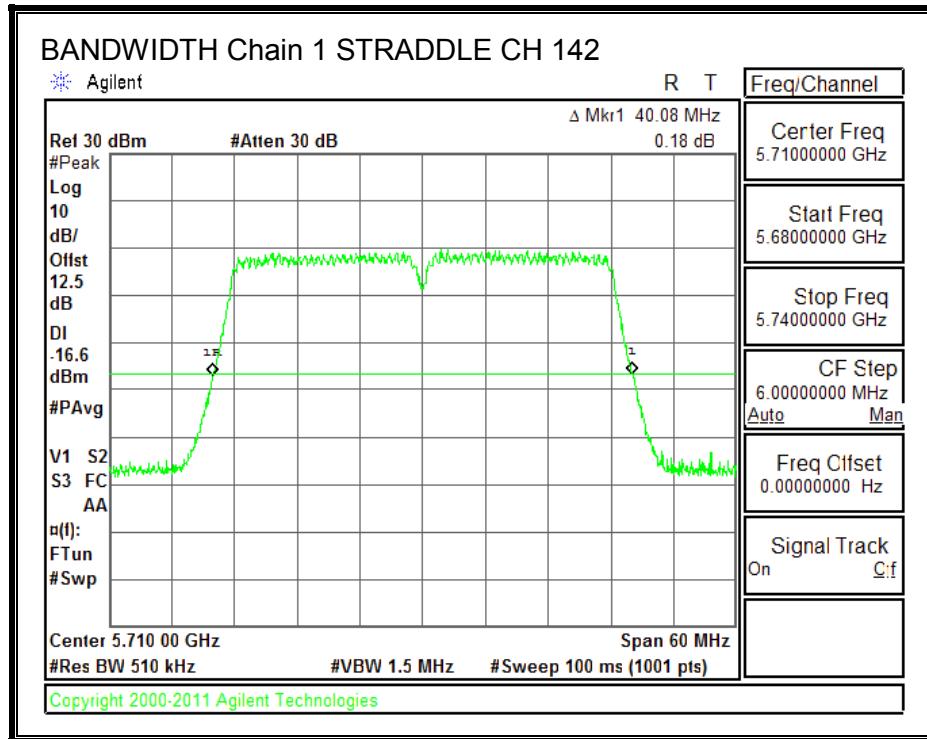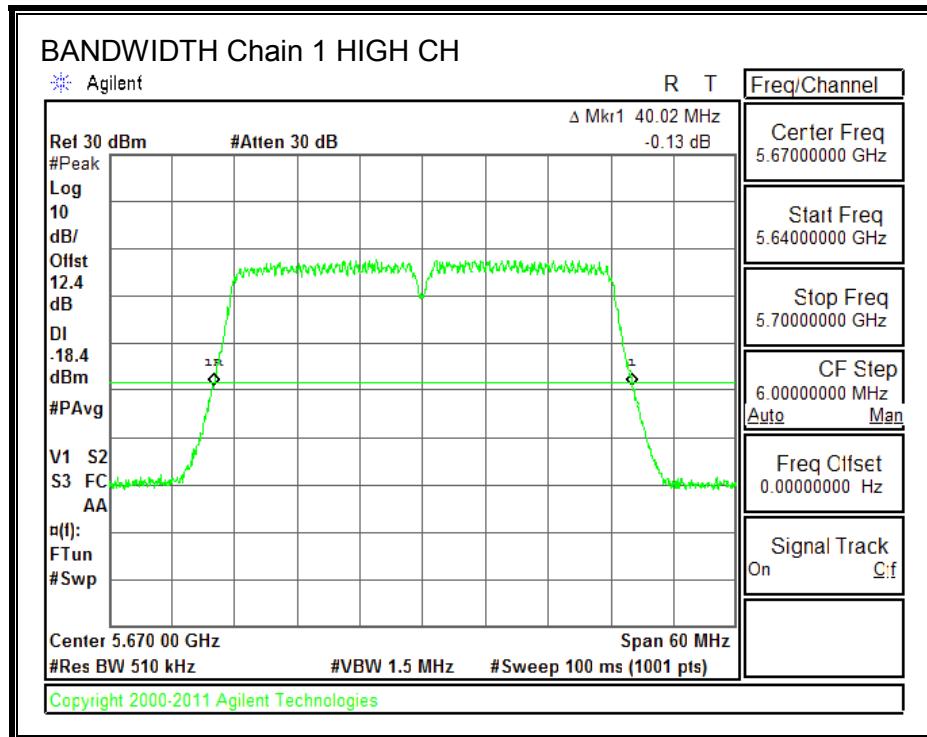

### 9.30.2. 99% BANDWIDTH



#### LIMITS



None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5510	36.1659	36.1627
Mid	5550	36.1634	36.1892
High	5670	36.1255	36.1368
142	5710	36.1930	36.1955



**99% BANDWIDTH, Chain 0**

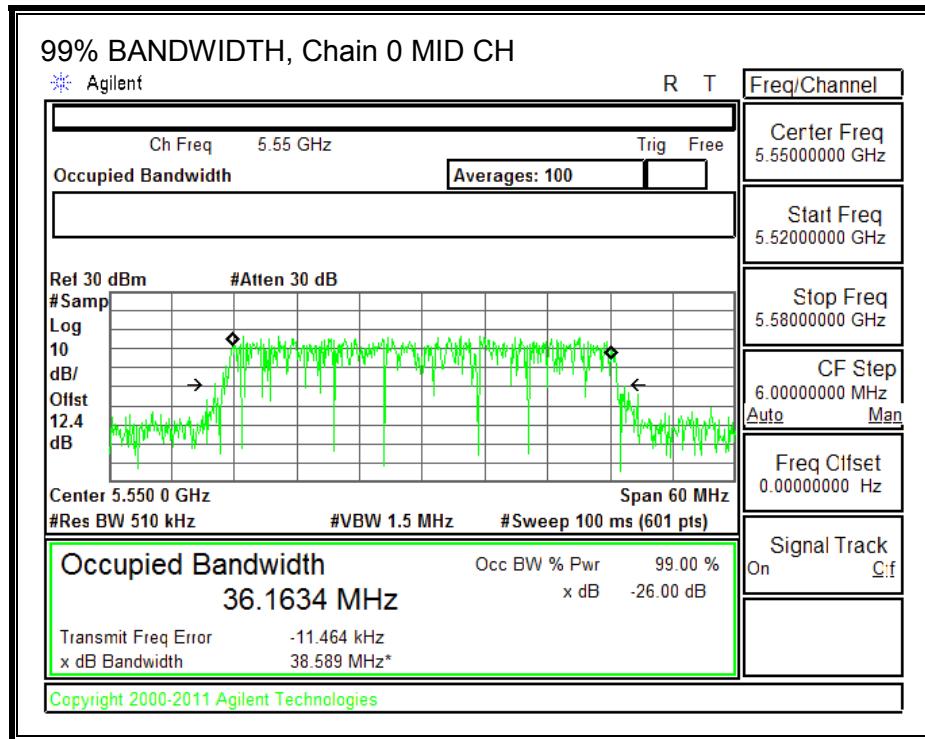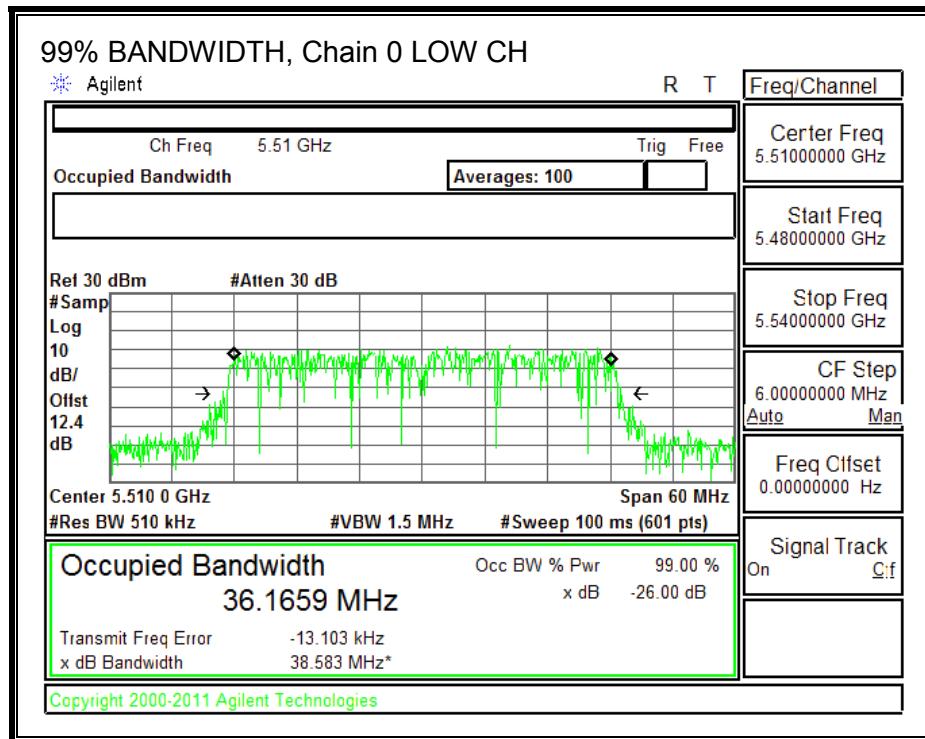

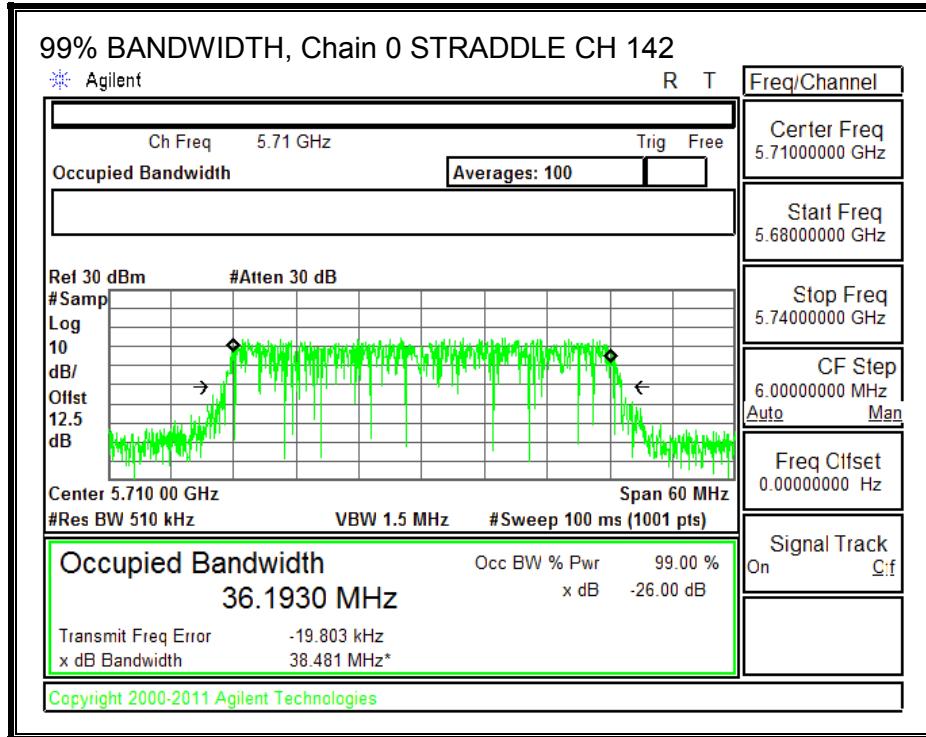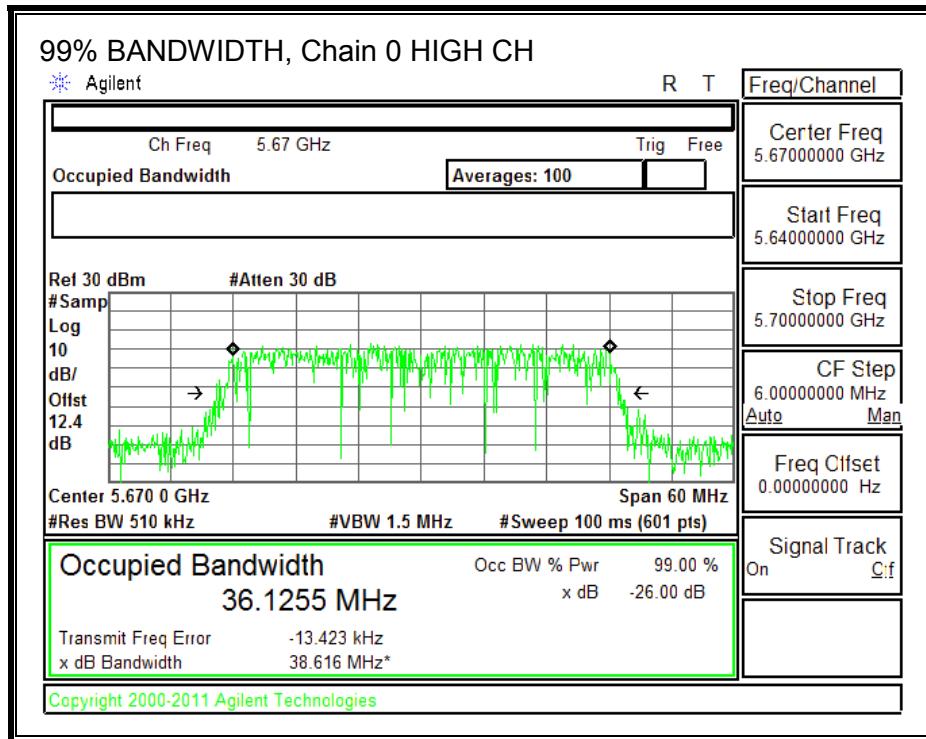

**99% BANDWIDTH, Chain 1**

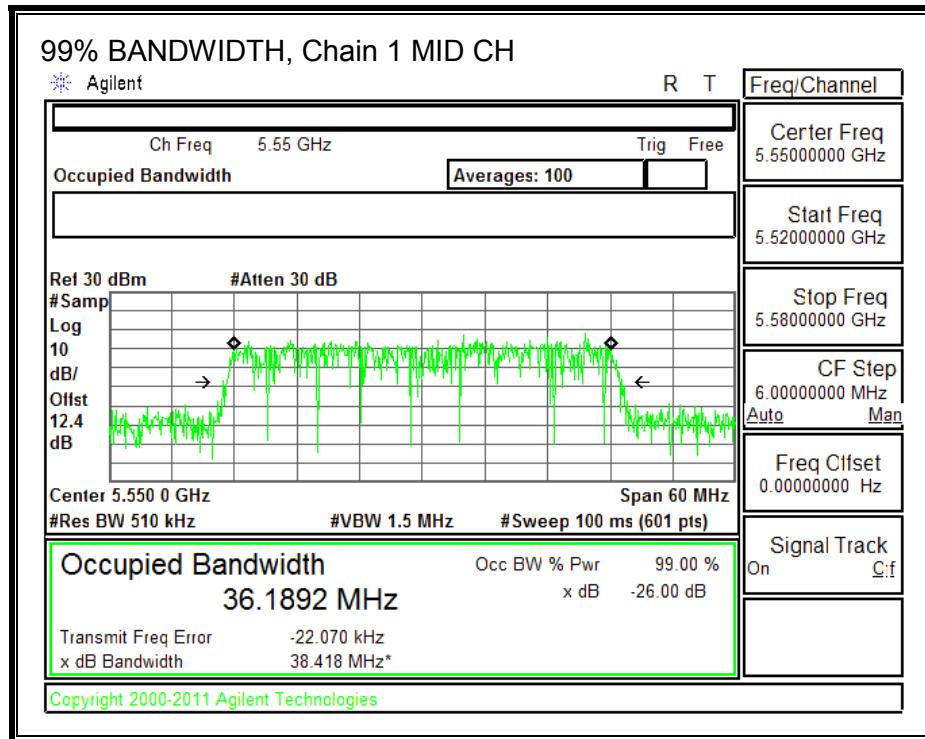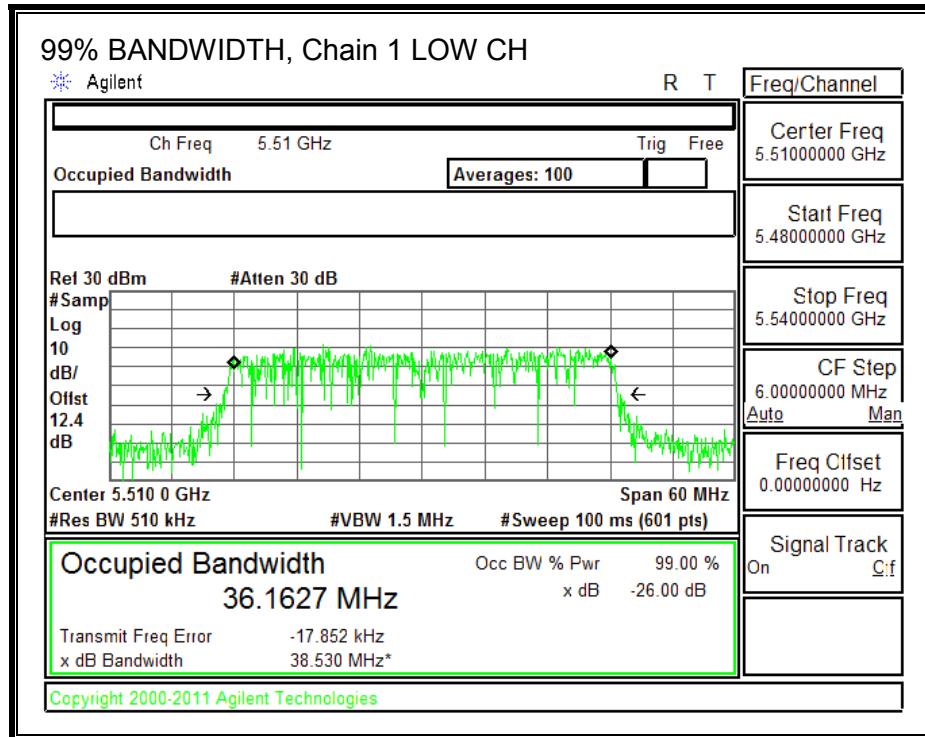

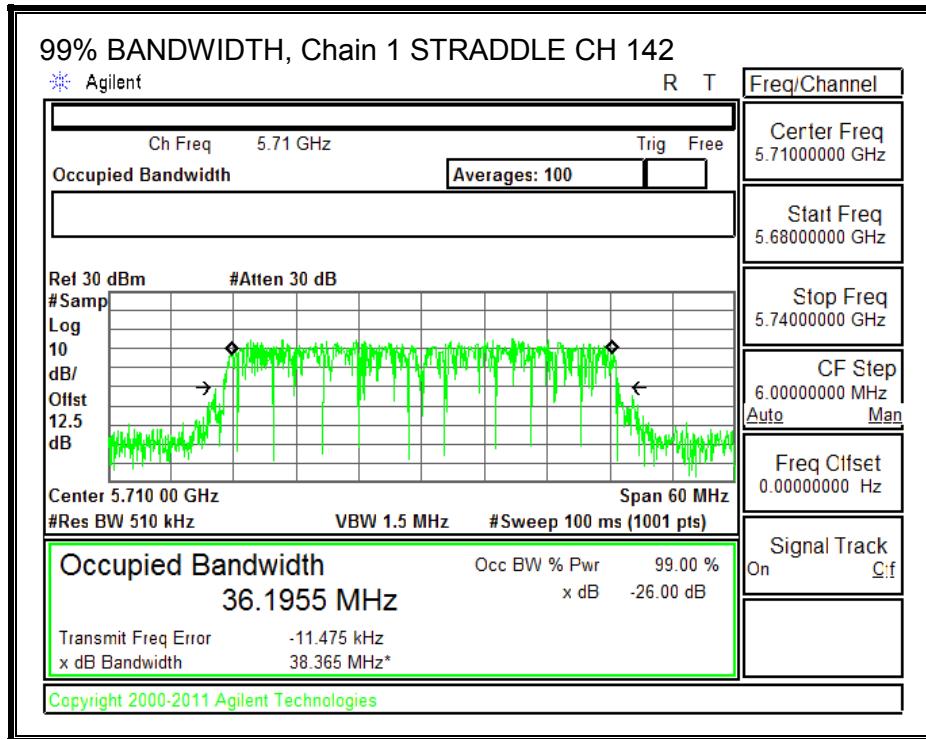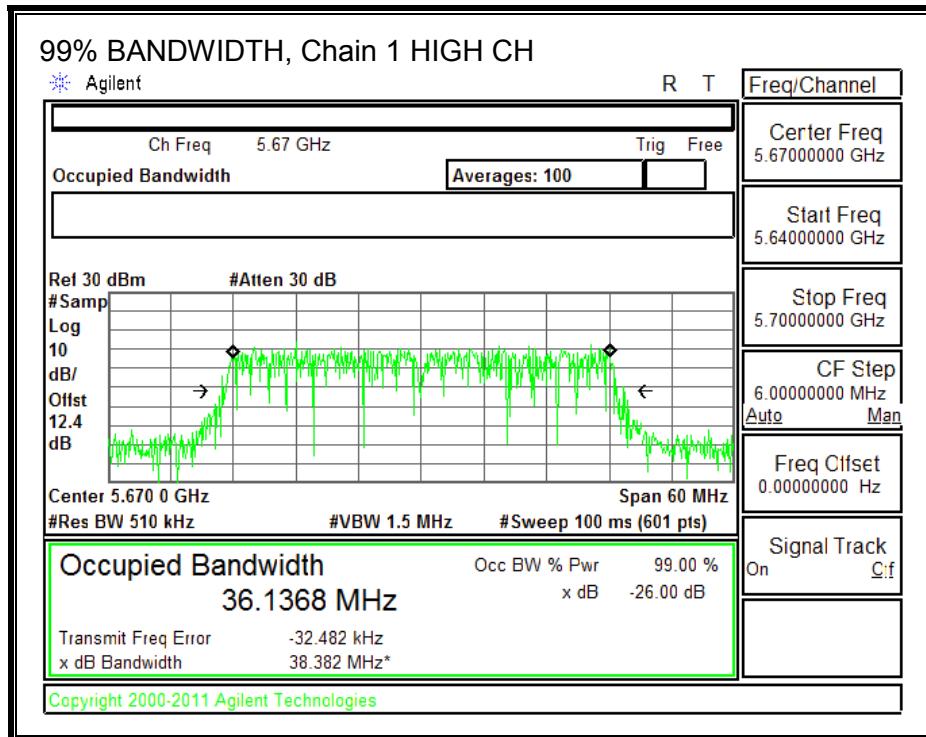

### 9.30.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
5.00	4.57	4.79

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
5.00	4.57	7.80

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.68	4.79	7.80	24.00	9.20
Mid	5550	40.56	4.79	7.80	24.00	9.20
High	5670	40.38	4.79	7.80	24.00	9.20
142	5710	40.38	4.79	7.80	24.00	9.20

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



### Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.94	12.97	15.97	24.00	-8.03
Mid	5550	16.98	16.93	19.97	24.00	-4.03
High	5670	16.93	16.94	19.95	24.00	-4.05
142	5710	16.98	17.00	20.00	24.00	-4.00

### PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	-1.01	-0.90	2.05	9.20	-7.15
Mid	5550	4.29	4.38	7.35	9.20	-1.85
High	5670	3.77	3.78	6.79	9.20	-2.41



**PSD, Chain 0**

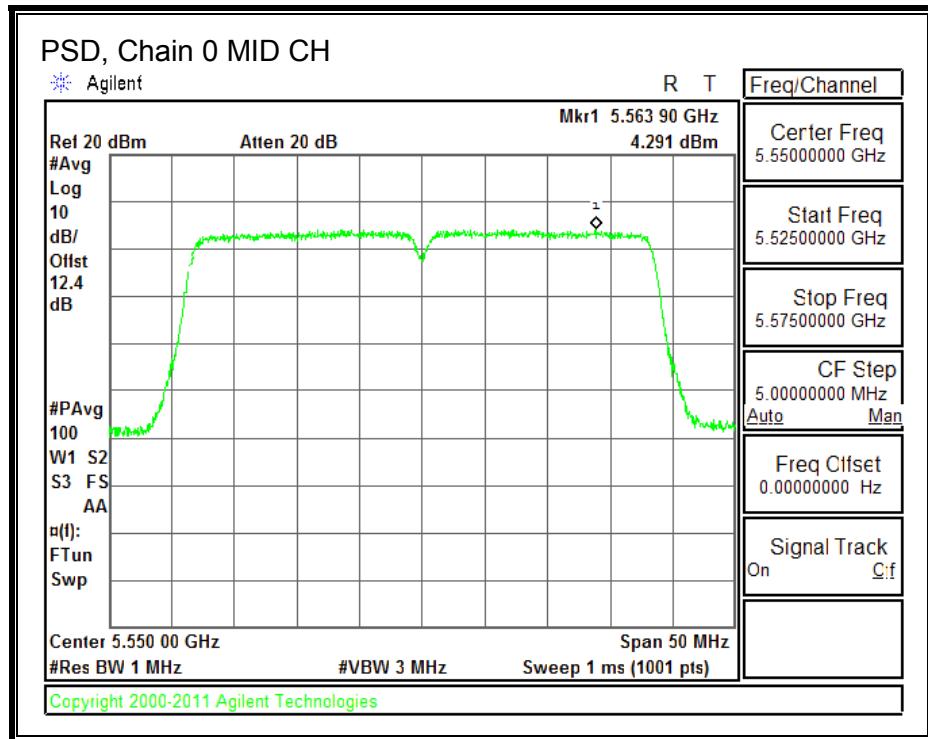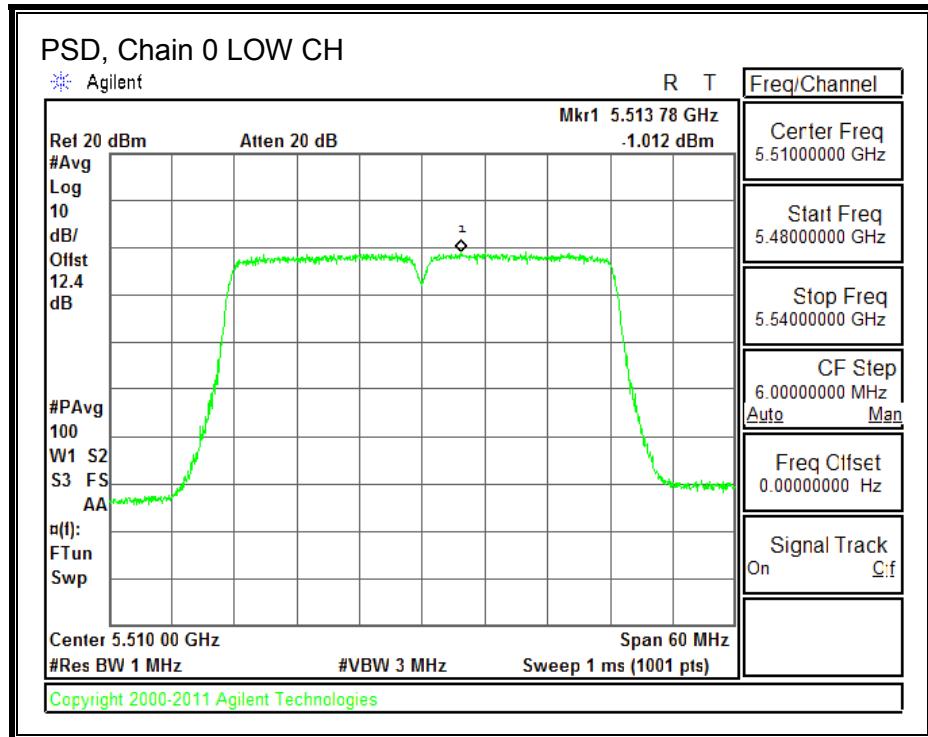

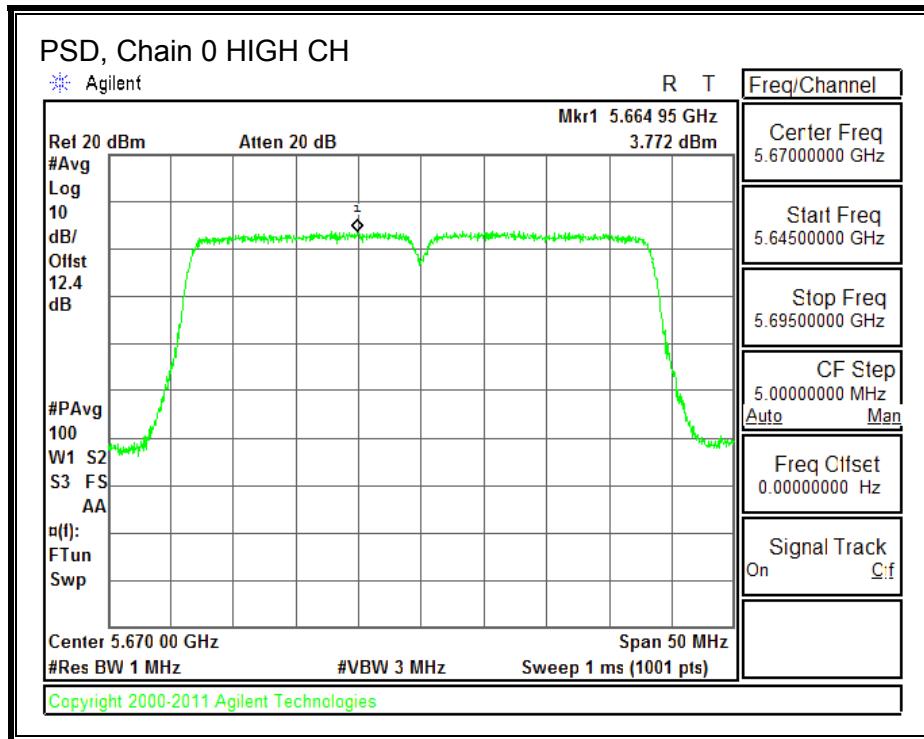

### PSD, Chain 1

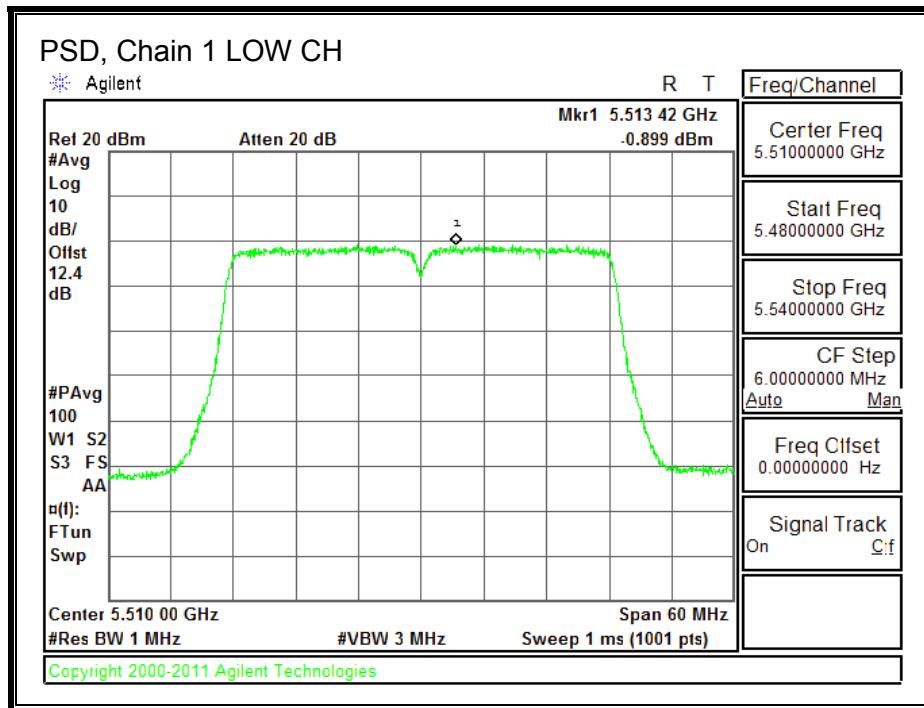

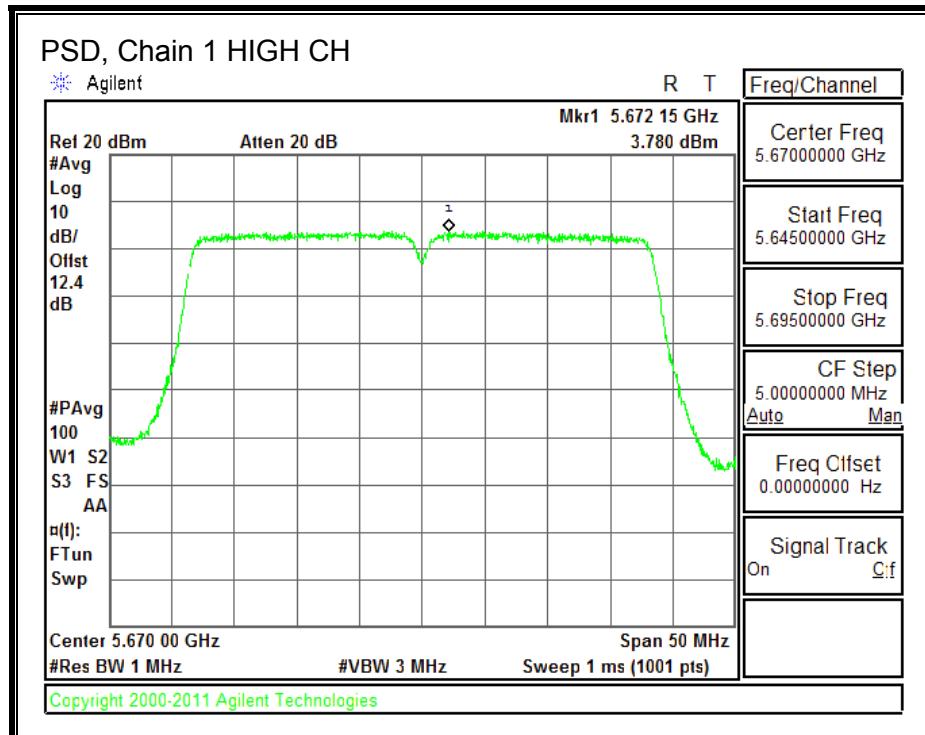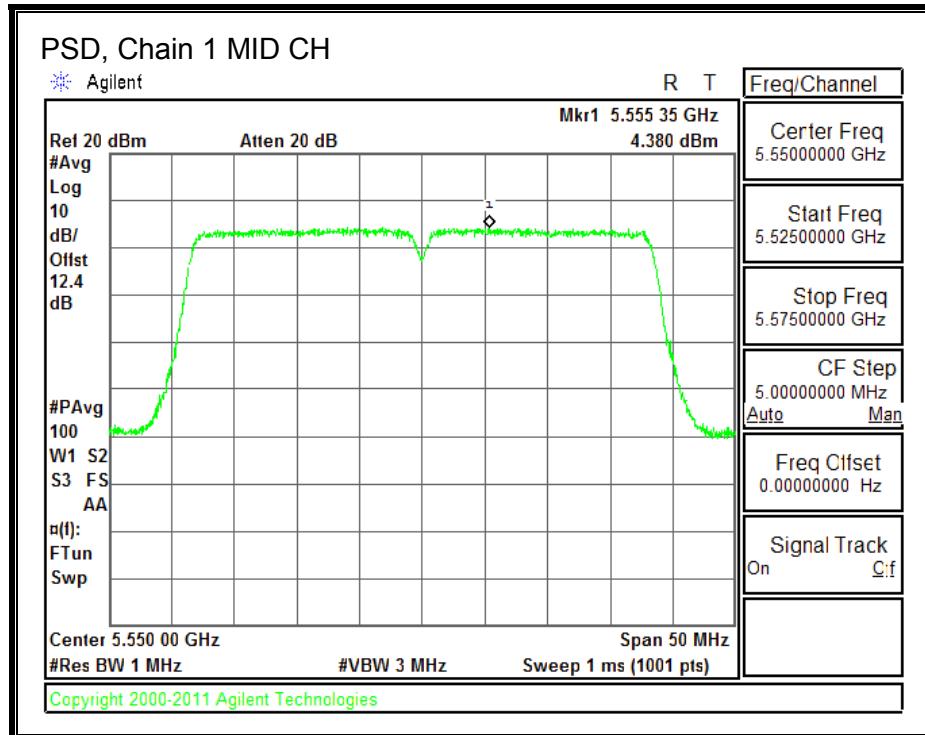

**STRADDLE CHANNEL 142 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	35.04	4.79	7.80	24.00	9.20



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	16.47	16.38	19.44	24.00	-4.56

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	2.55	2.56	5.56	9.20	-3.64

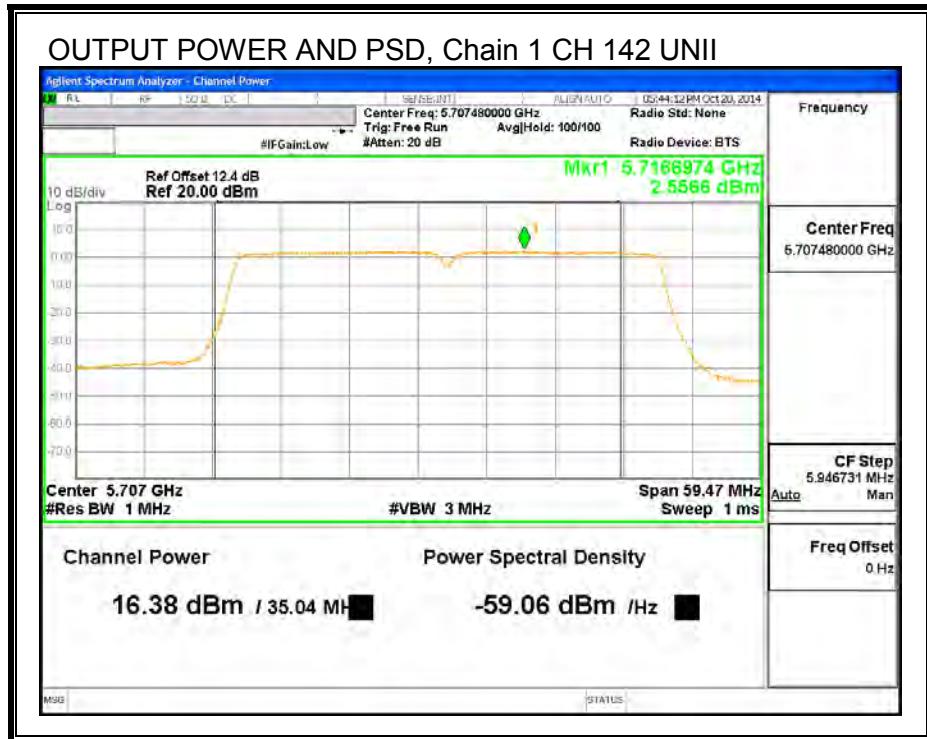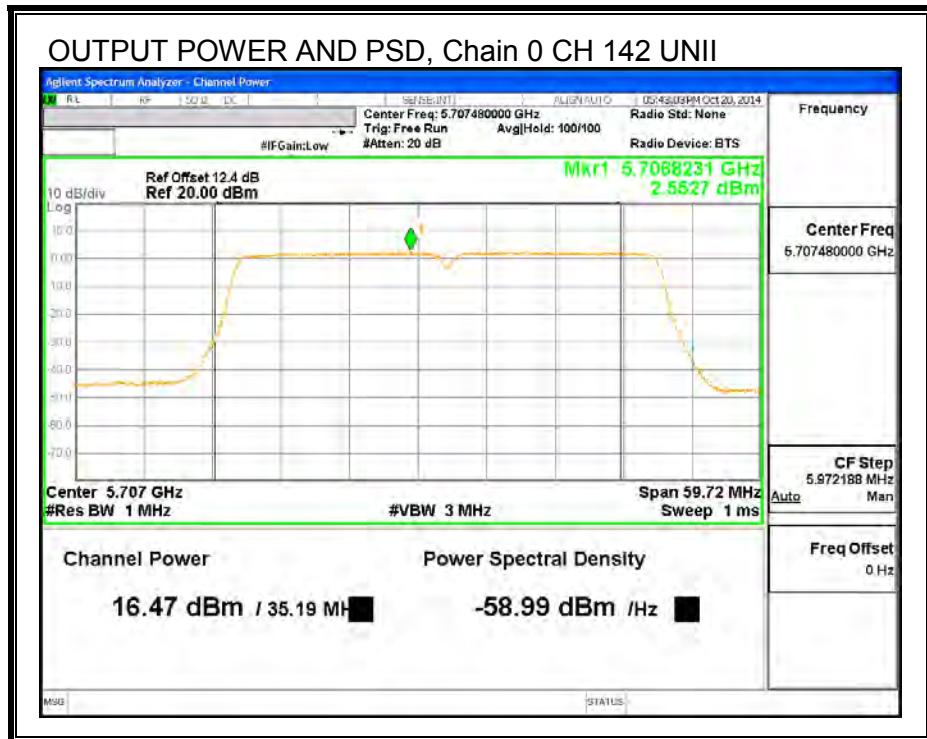

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	4.79	7.80	30.00	28.20



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin
142	5710	6.11	6.14	9.14	30.00	-20.86

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin
142	5710	-1.09	-1.06	1.94	28.20	-26.26

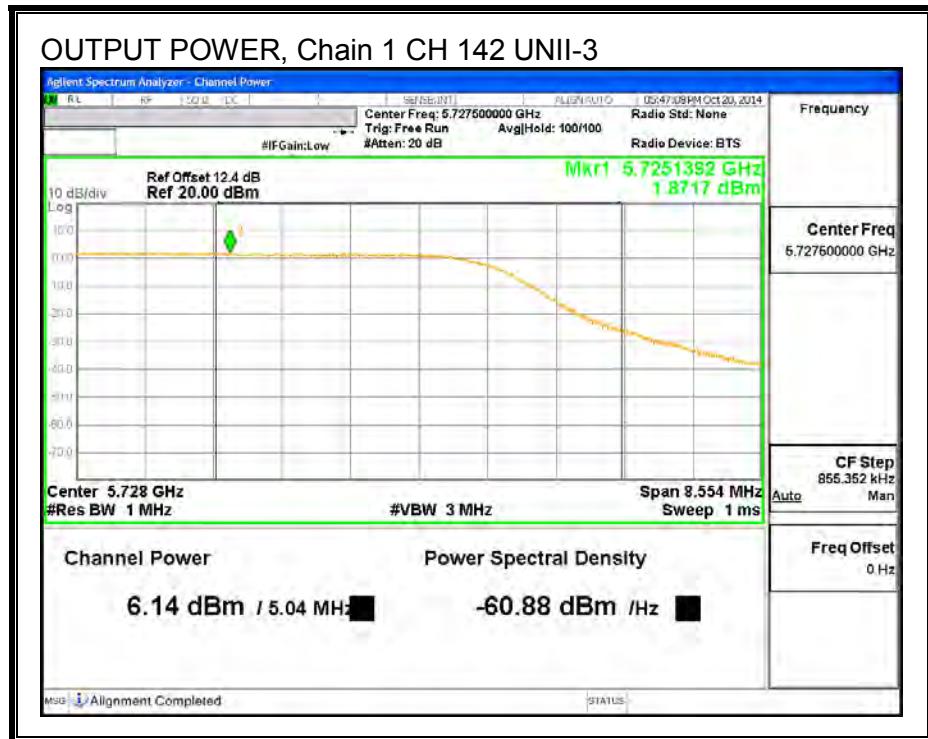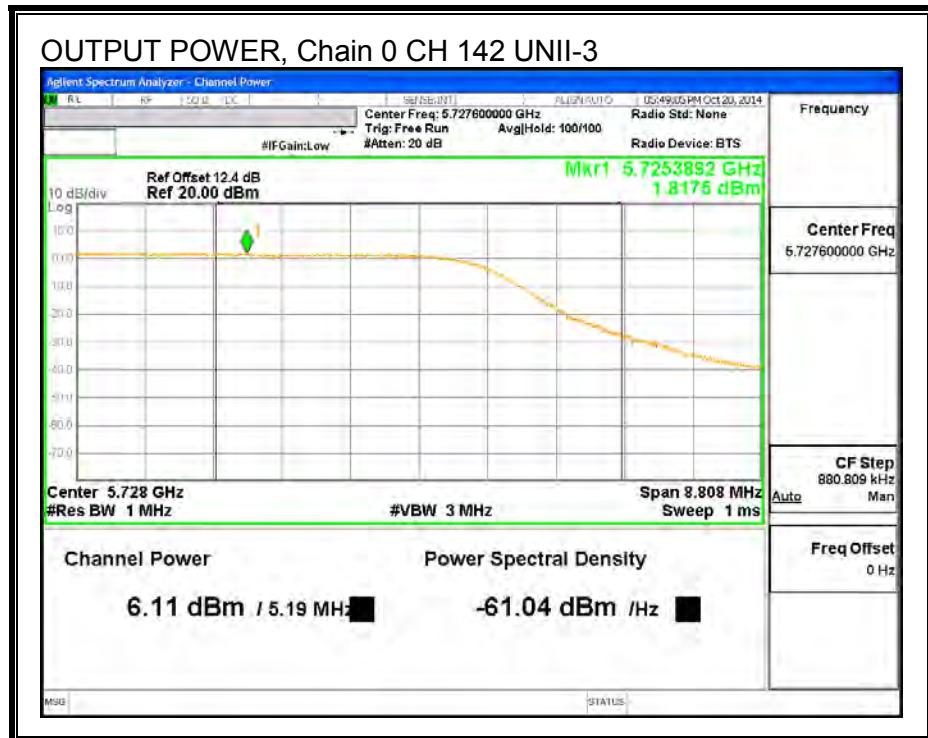

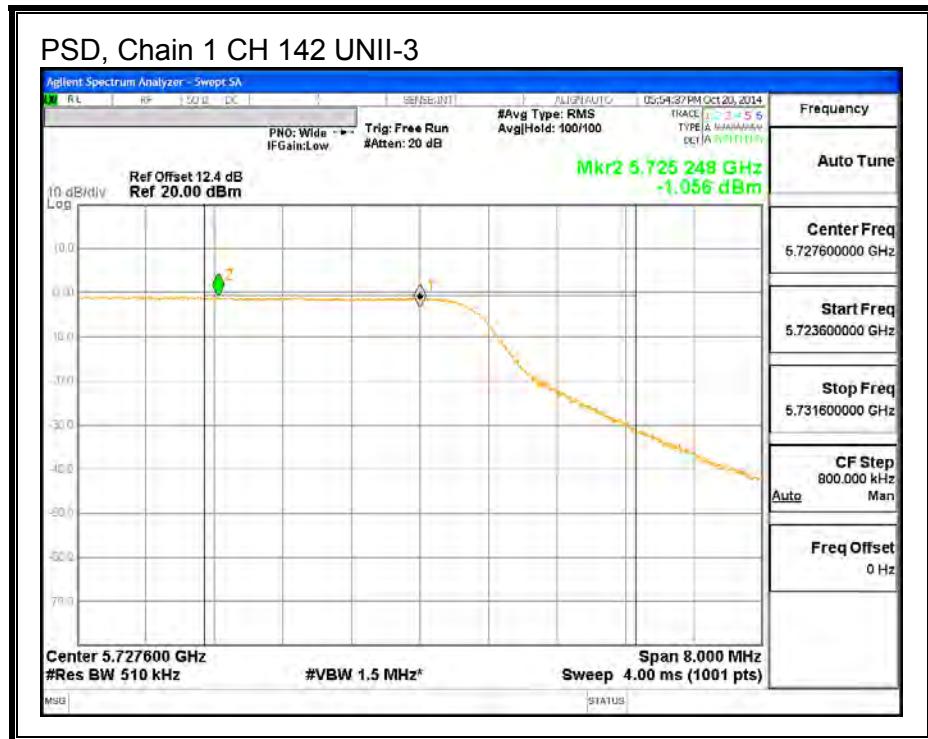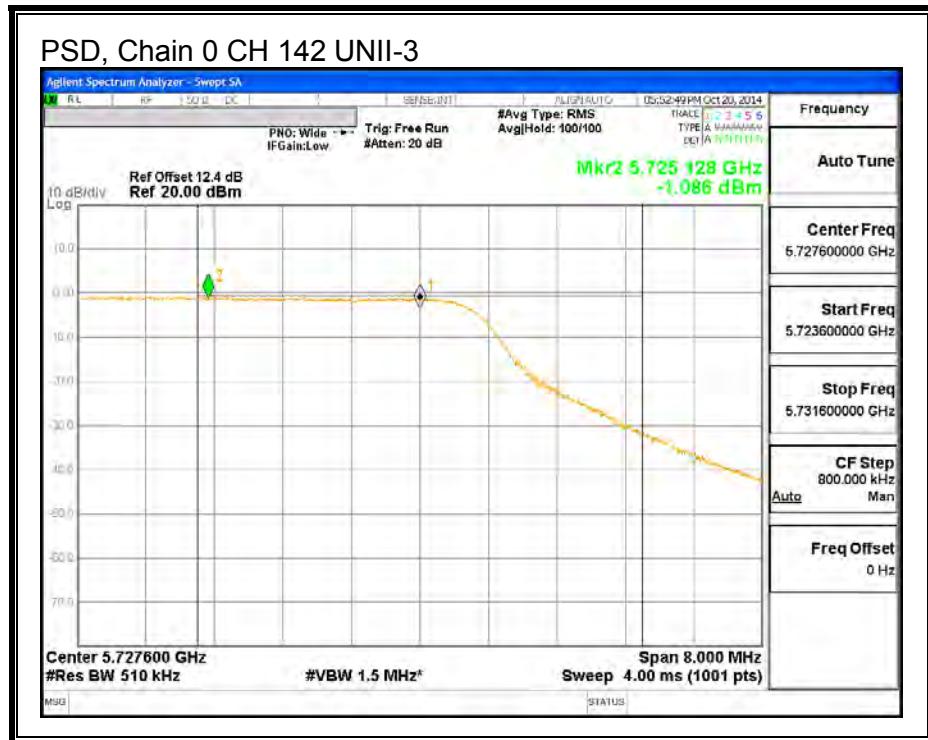

## 9.31. 802.11n HT40 2TX STBC MODE IN THE 5.6 GHz BAND

### 9.31.1. 26 dB BANDWIDTH



#### LIMITS



None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5510	40.68	40.08
Mid	5550	40.38	40.14
High	5670	40.86	40.08
142	5710	40.32	40.14



**26 dB BANDWIDTH, Chain 0**

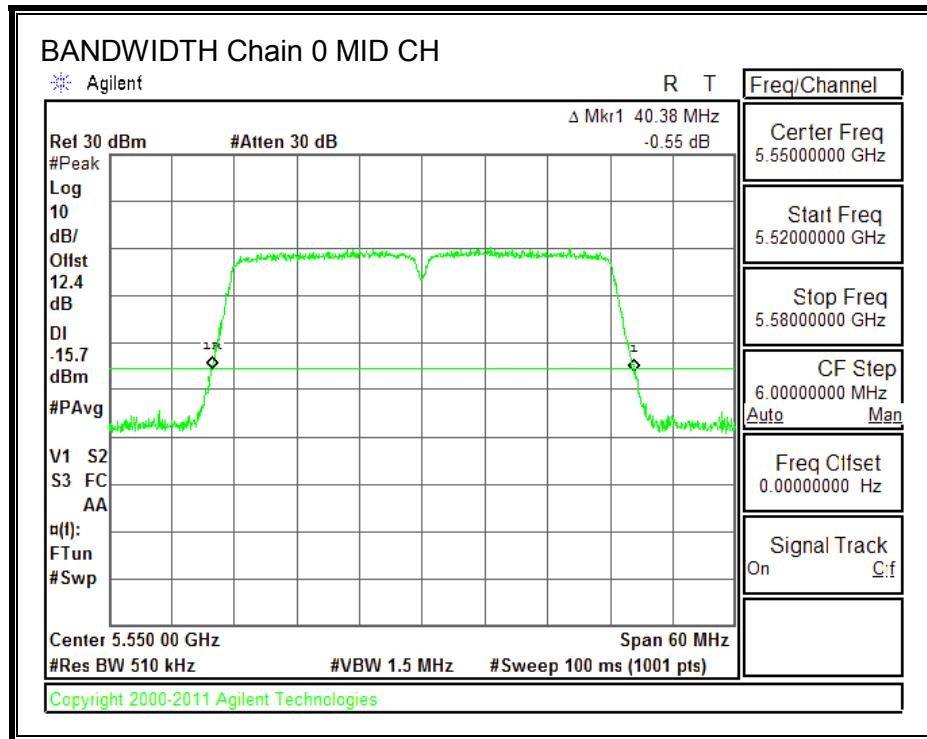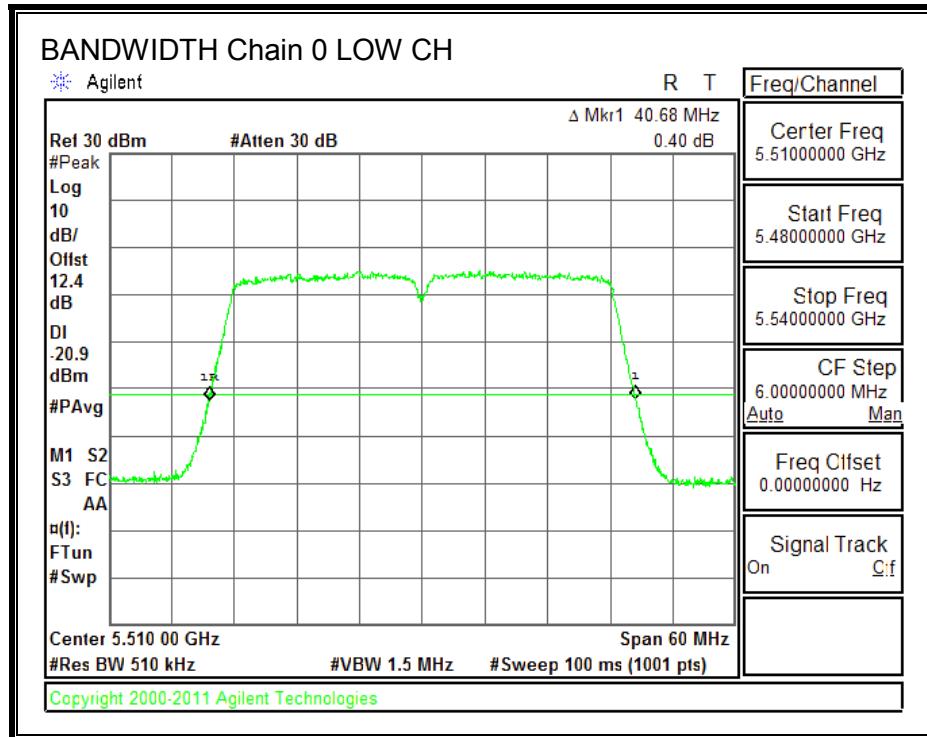

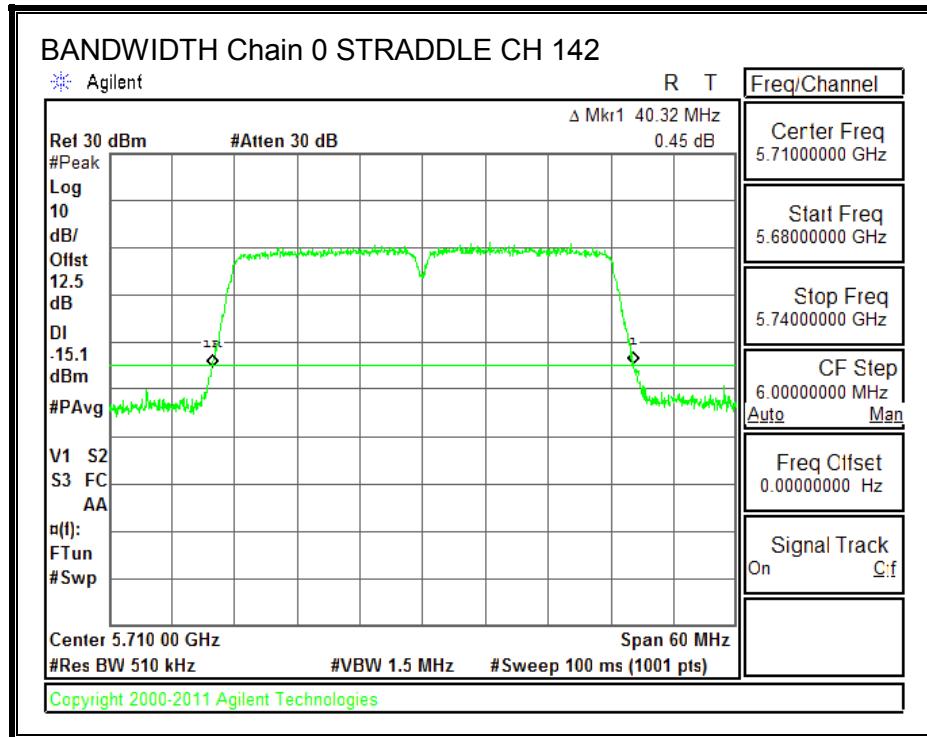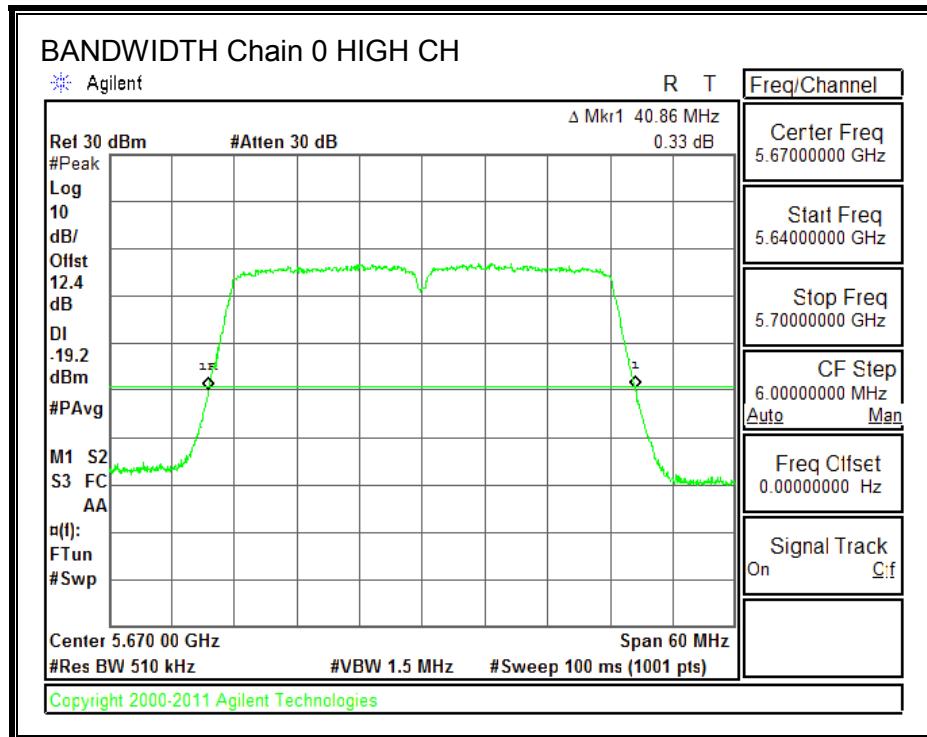

**26 dB BANDWIDTH, Chain 1**

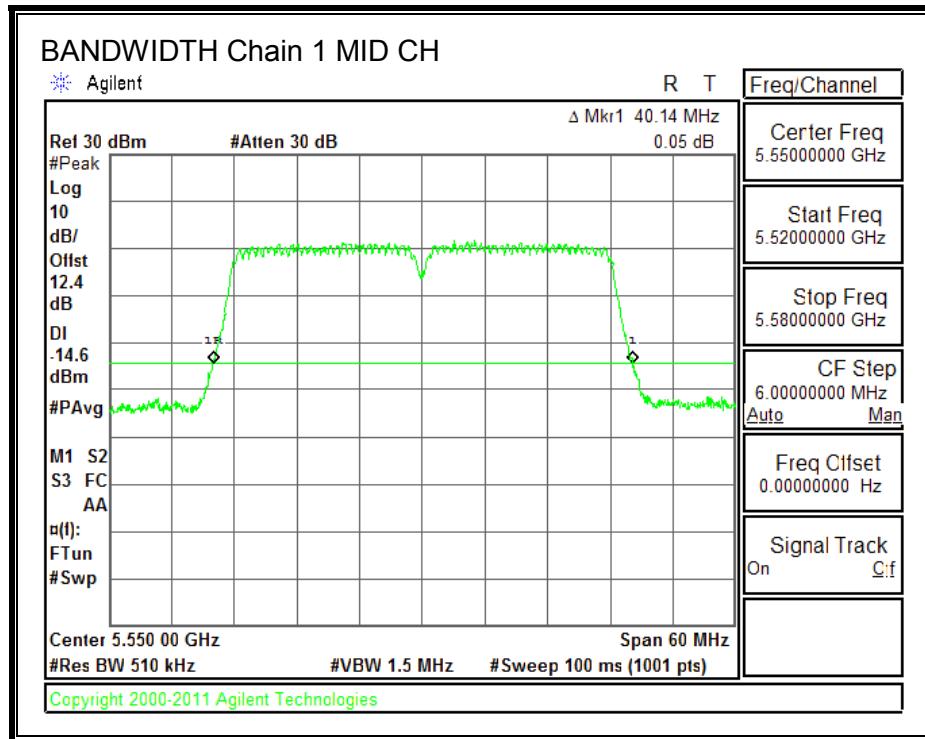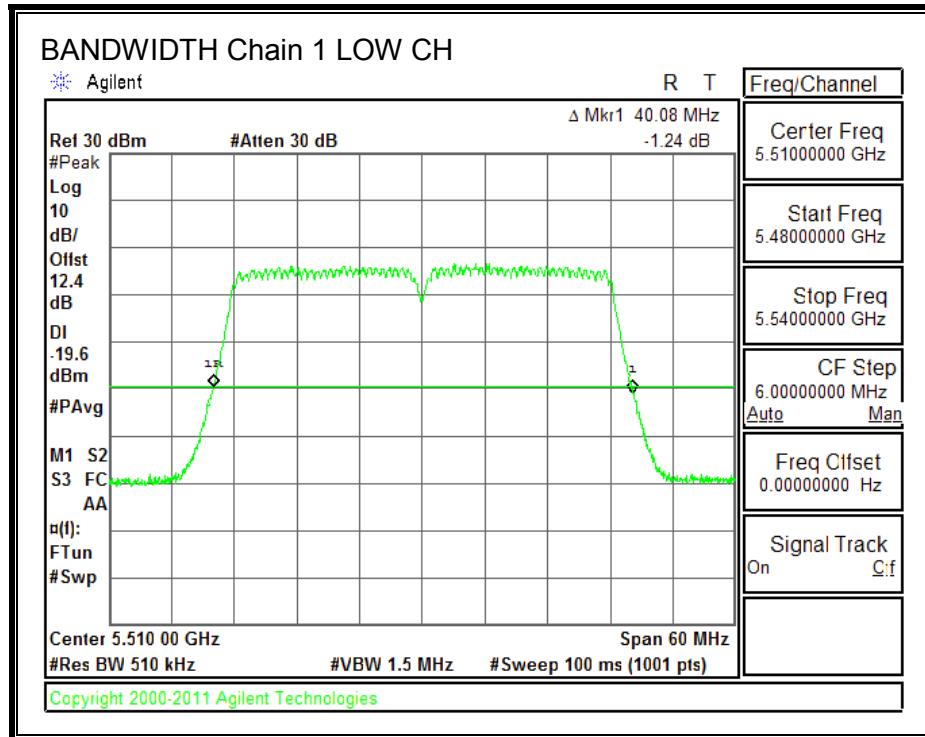

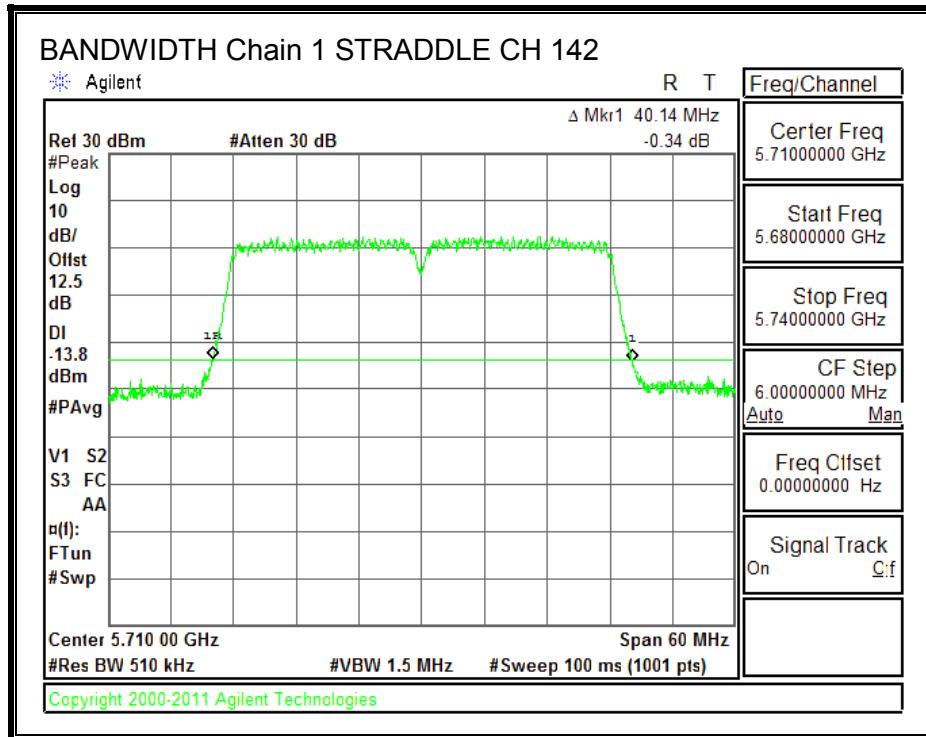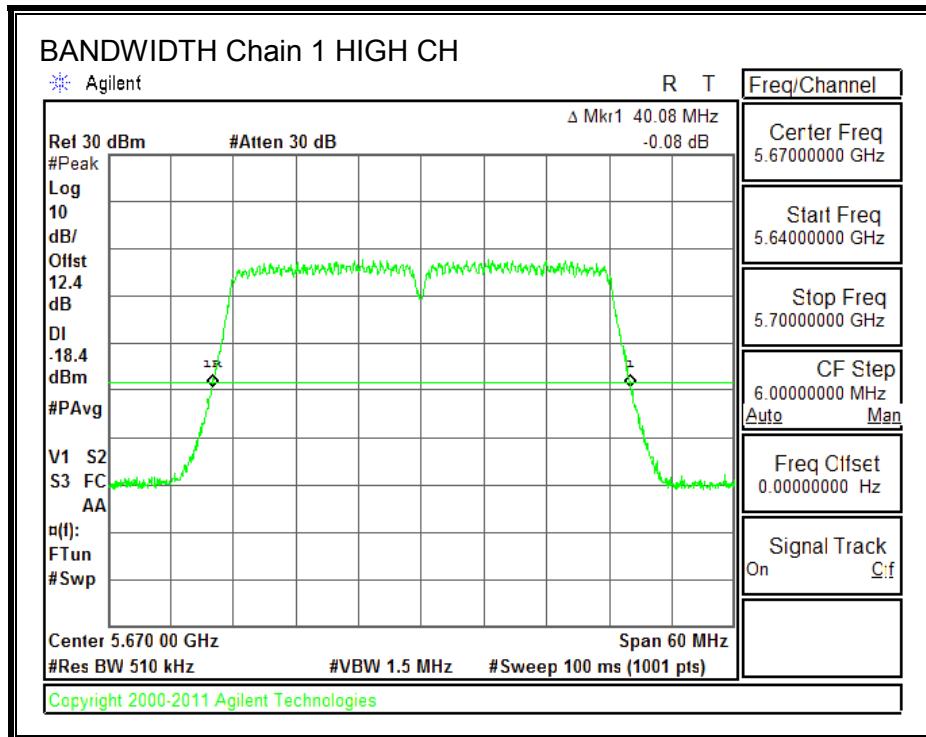

### 9.31.2. 99% BANDWIDTH



#### LIMITS



None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5510	36.1495	36.1713
Mid	5550	36.1681	36.1738
High	5670	36.1685	36.1574
142	5710	36.1926	36.2123



**99% BANDWIDTH, Chain 0**

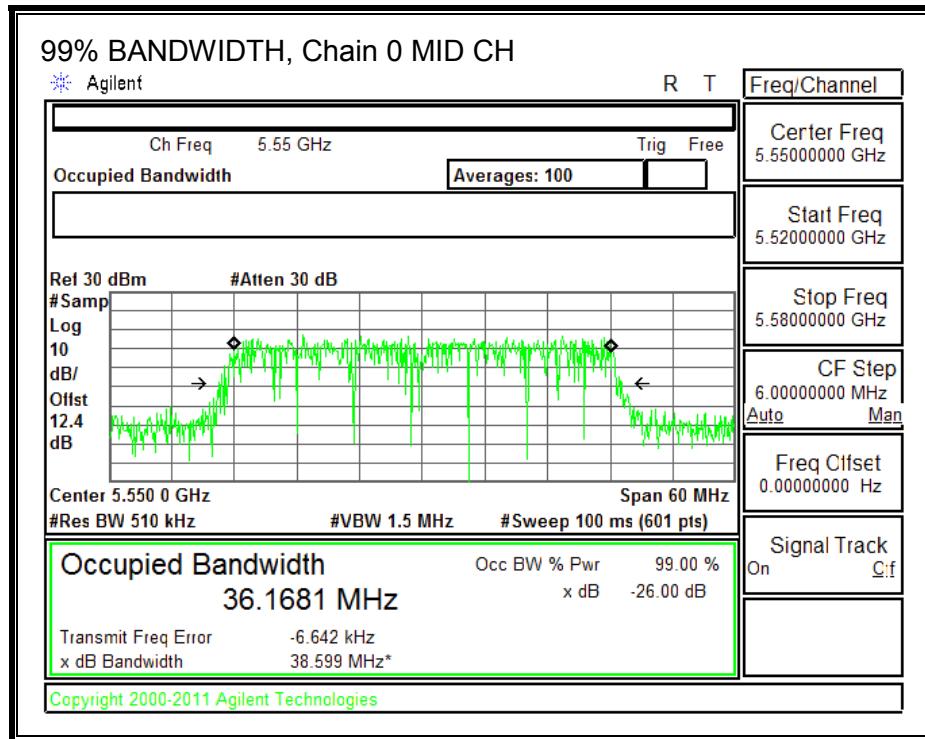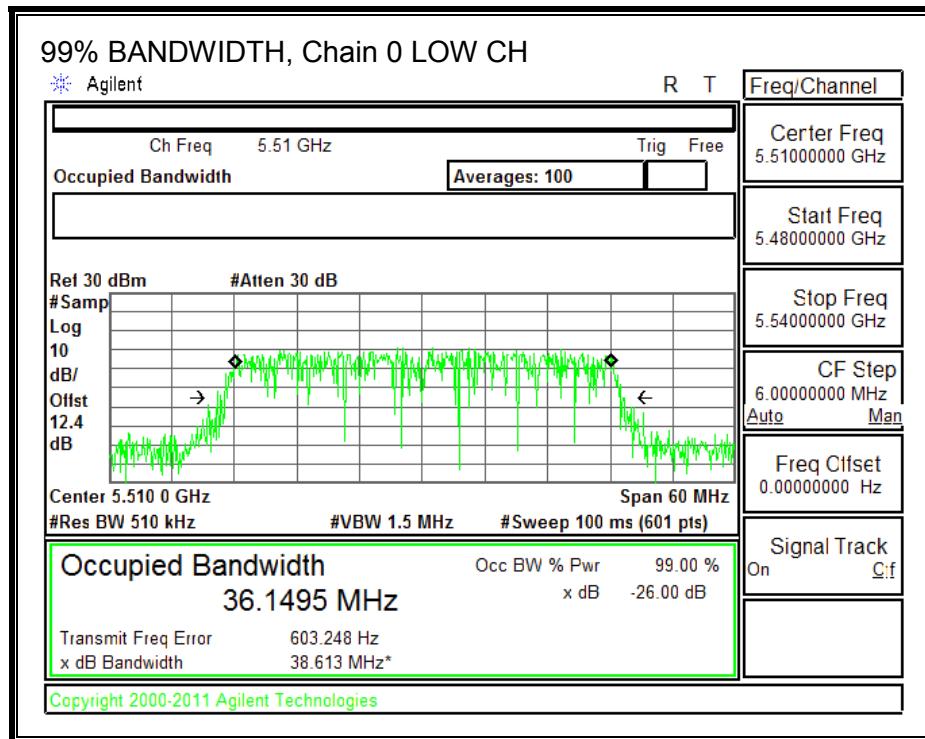

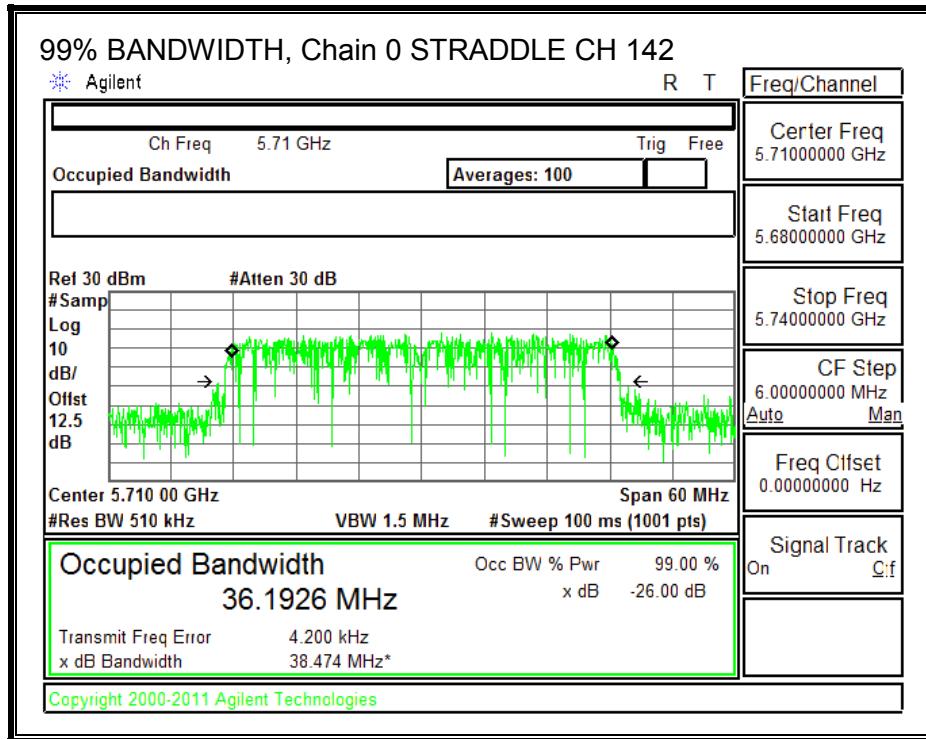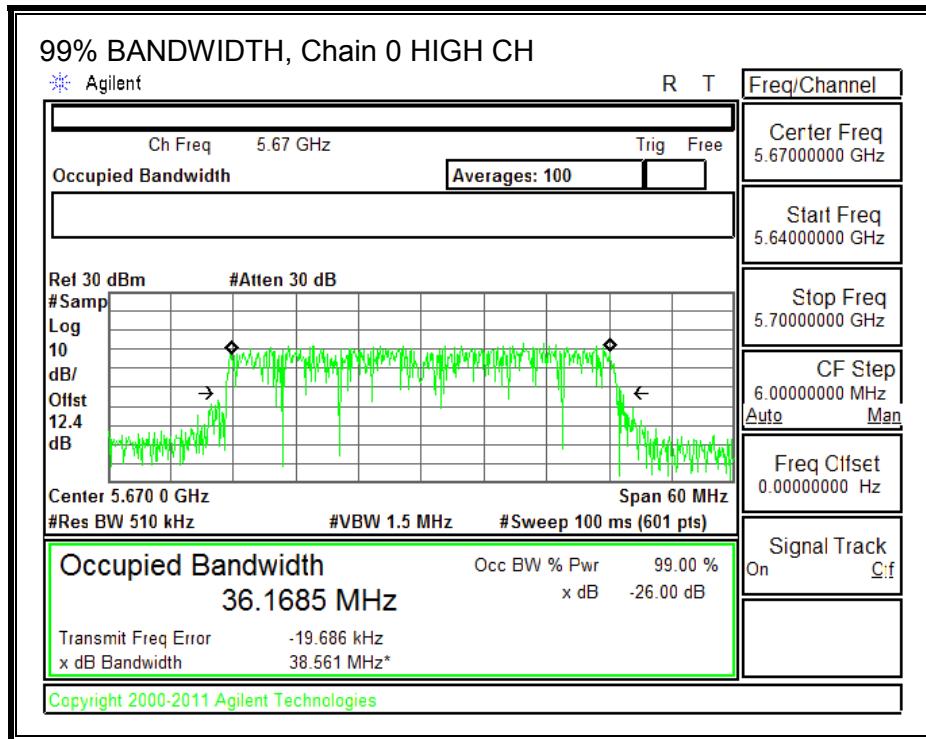

**99% BANDWIDTH, Chain 1**

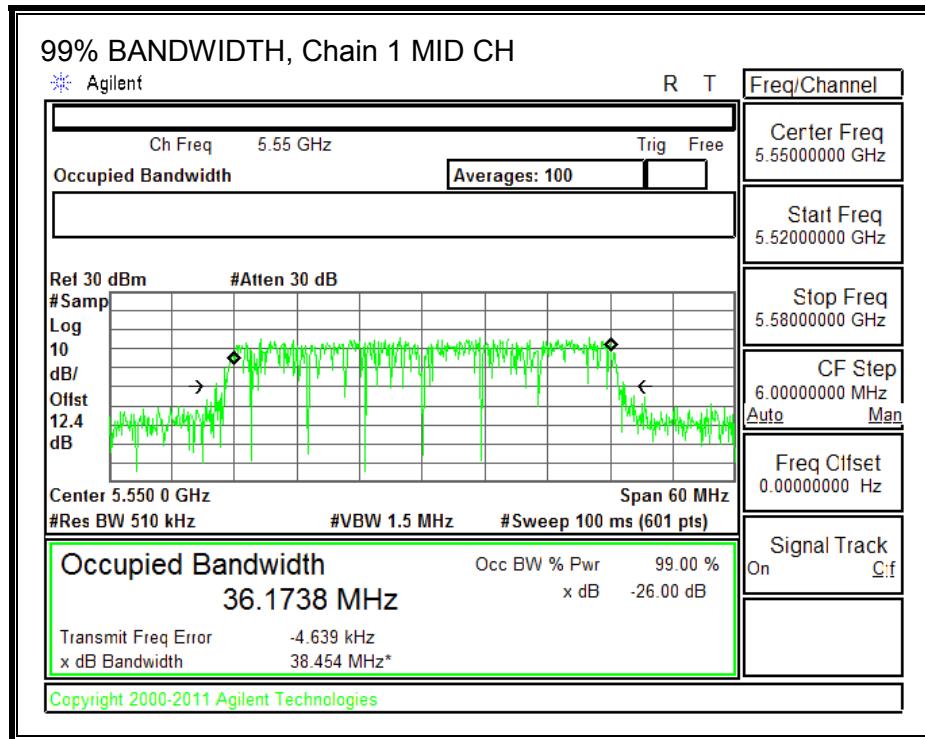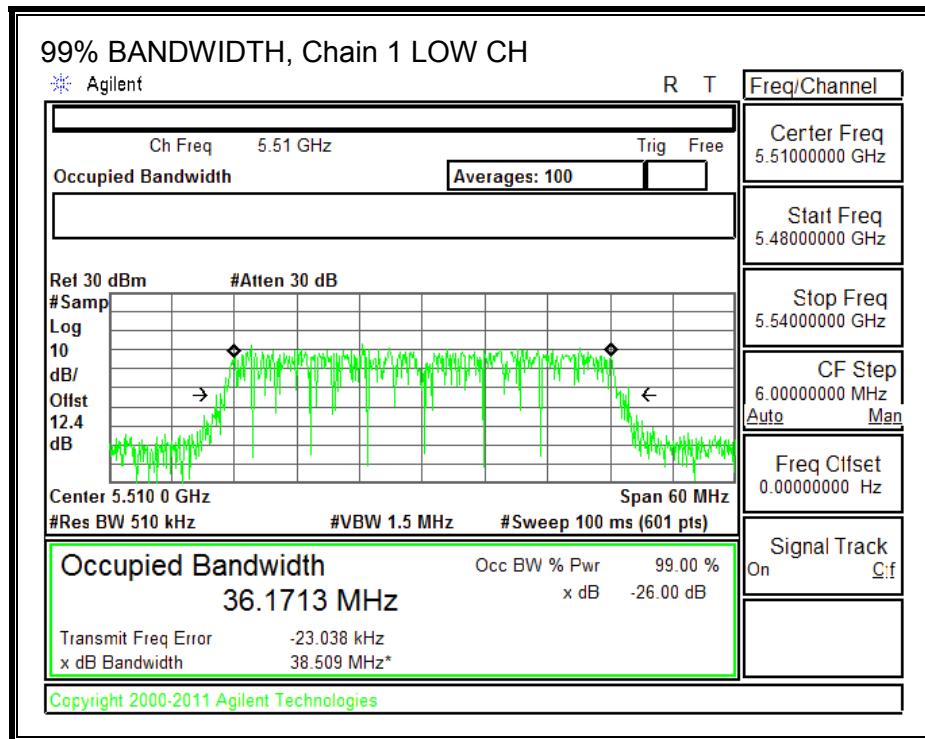

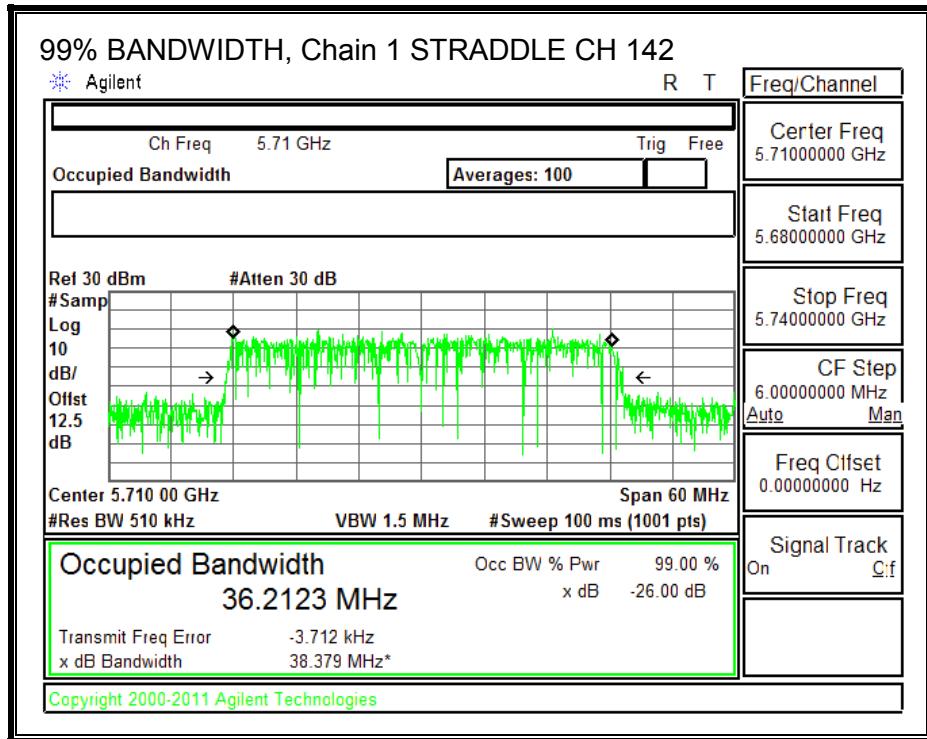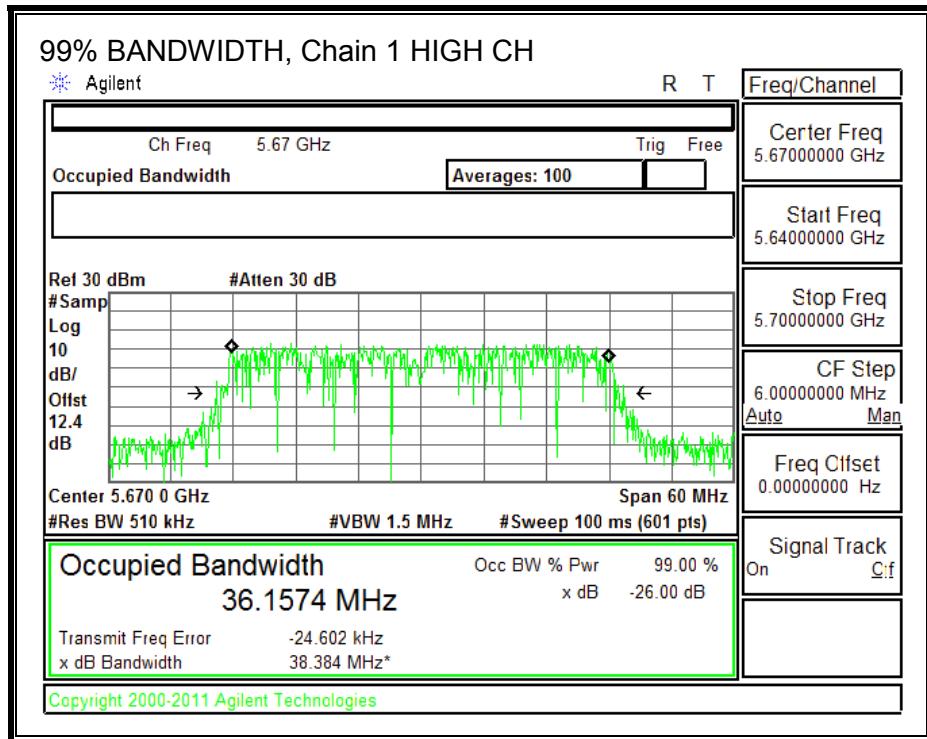

### 9.31.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
5.00	4.57	4.79

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.68	4.79	4.79	24.00	11.00
Mid	5550	40.38	4.79	4.79	24.00	11.00
High	5670	40.86	4.79	4.79	24.00	11.00
142	5710	40.32	4.79	4.79	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



### Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.70	12.85	15.79	24.00	-8.21
Mid	5550	17.74	17.99	20.88	24.00	-3.12
High	5670	16.92	16.98	19.96	24.00	-4.04
142	5710	16.95	17.00	19.99	24.00	-4.01

### PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	-0.79	-0.66	2.29	11.00	-8.71
Mid	5550	4.30	4.38	7.35	11.00	-3.65
High	5670	3.91	3.46	6.70	11.00	-4.30



**PSD, Chain 0**

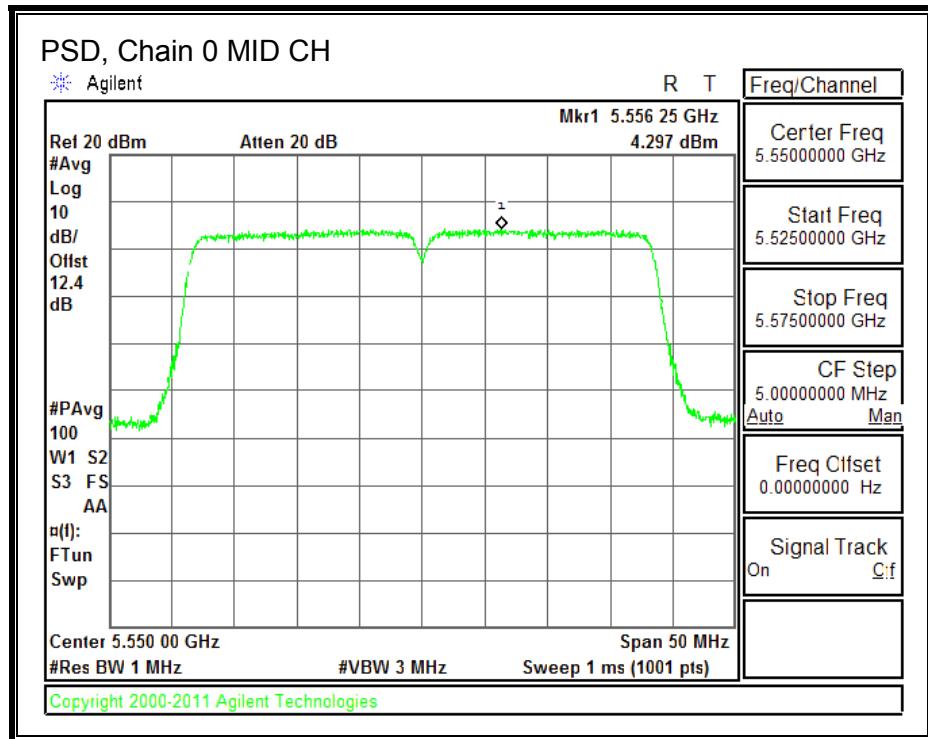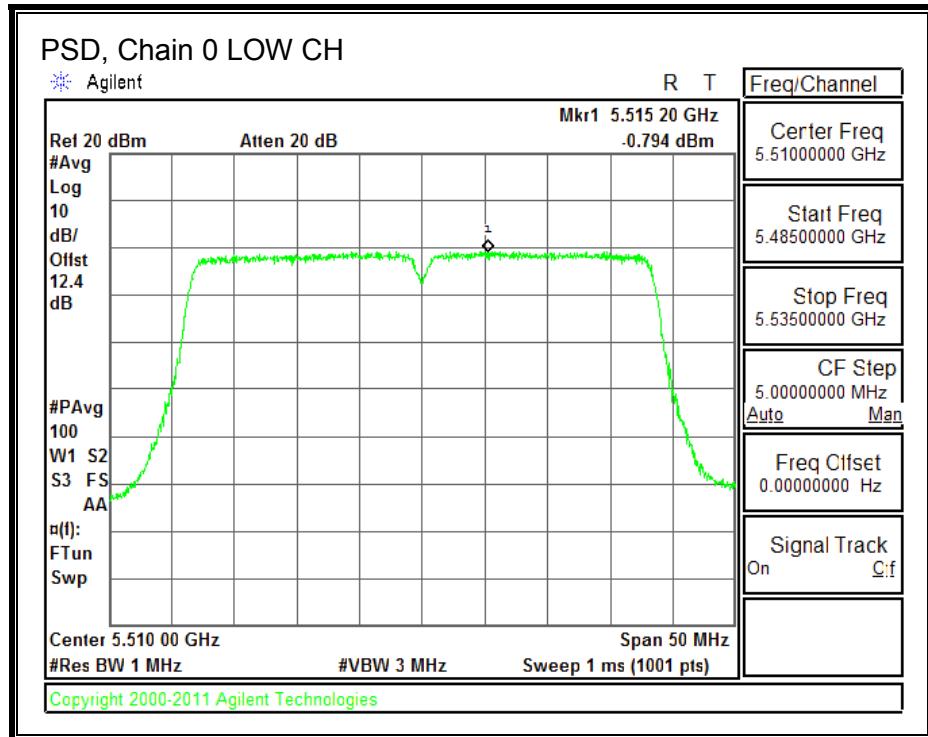

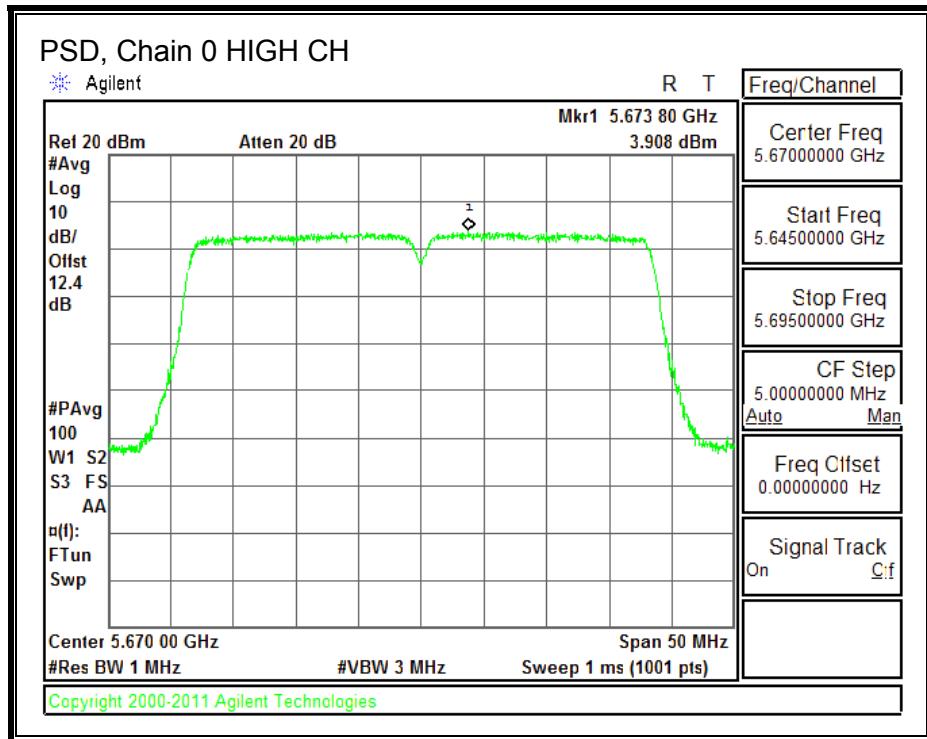

### PSD, Chain 1

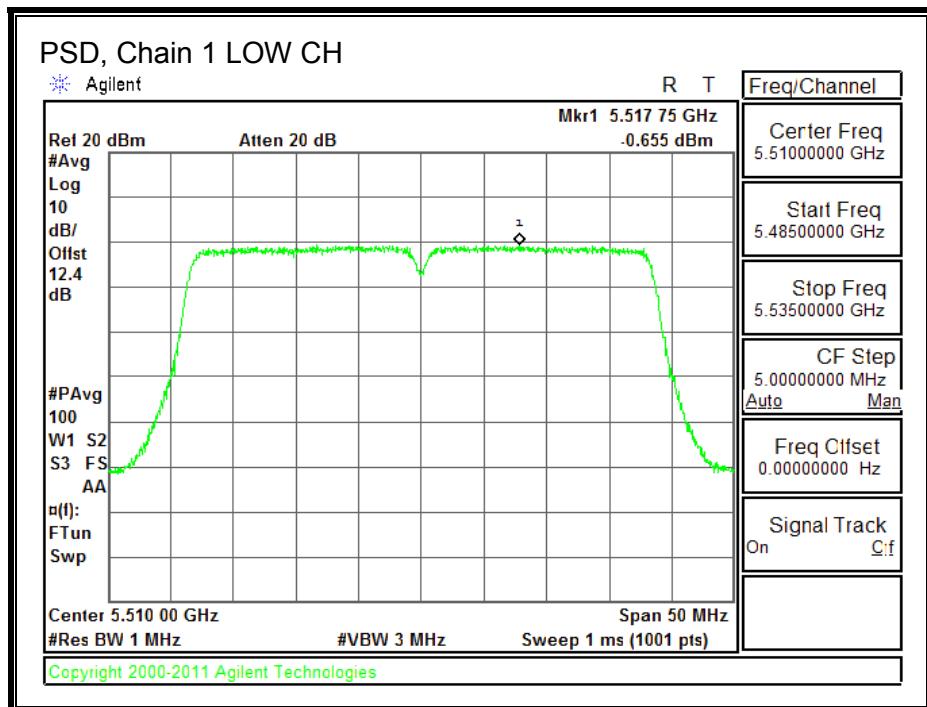

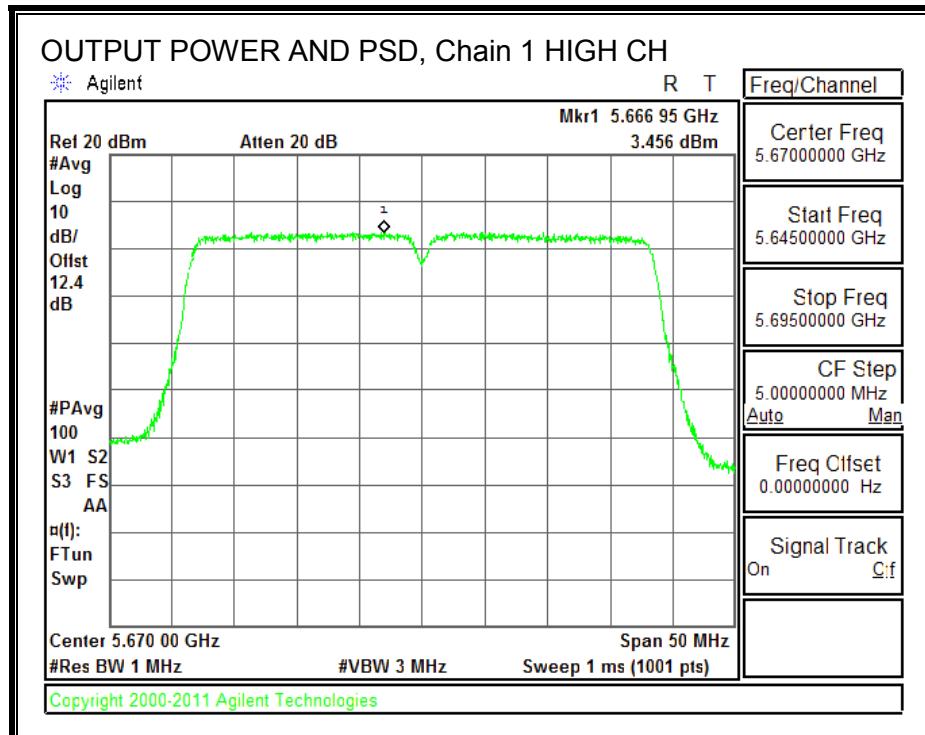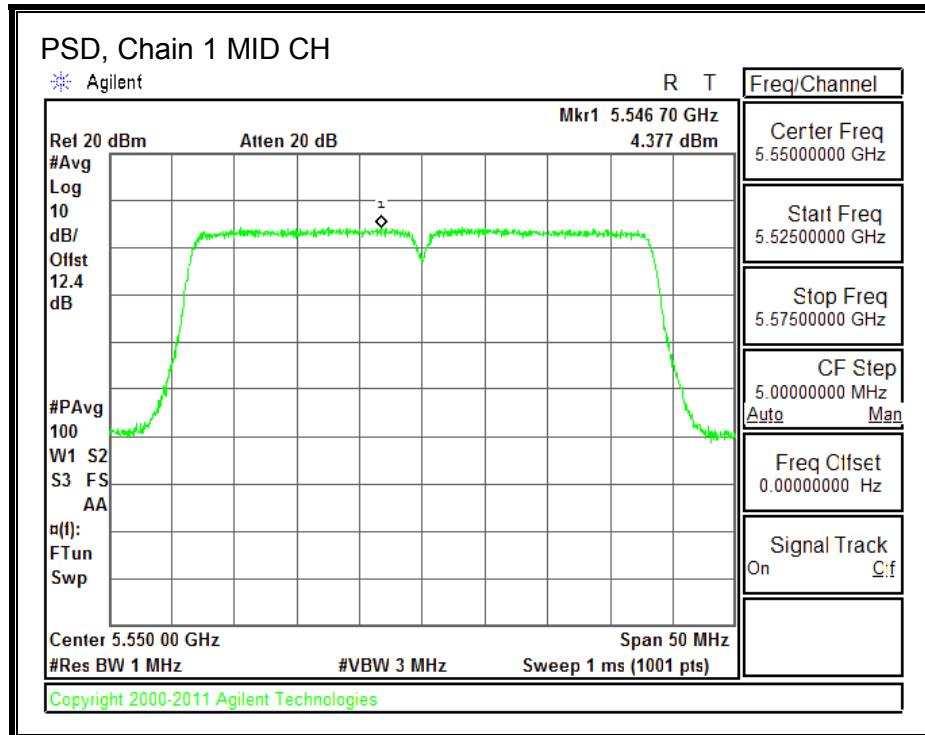

**STRADDLE CHANNEL 142 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	35.07	4.79	4.79	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	16.42	16.44	19.44	24.00	-4.56

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	2.49	2.38	5.44	11.00	-5.56

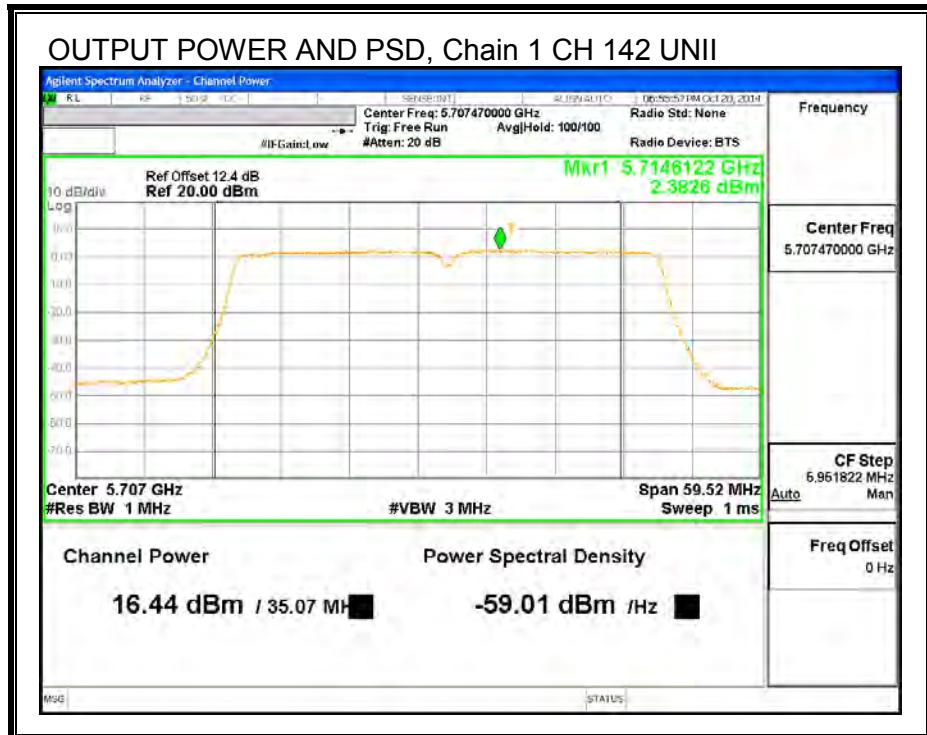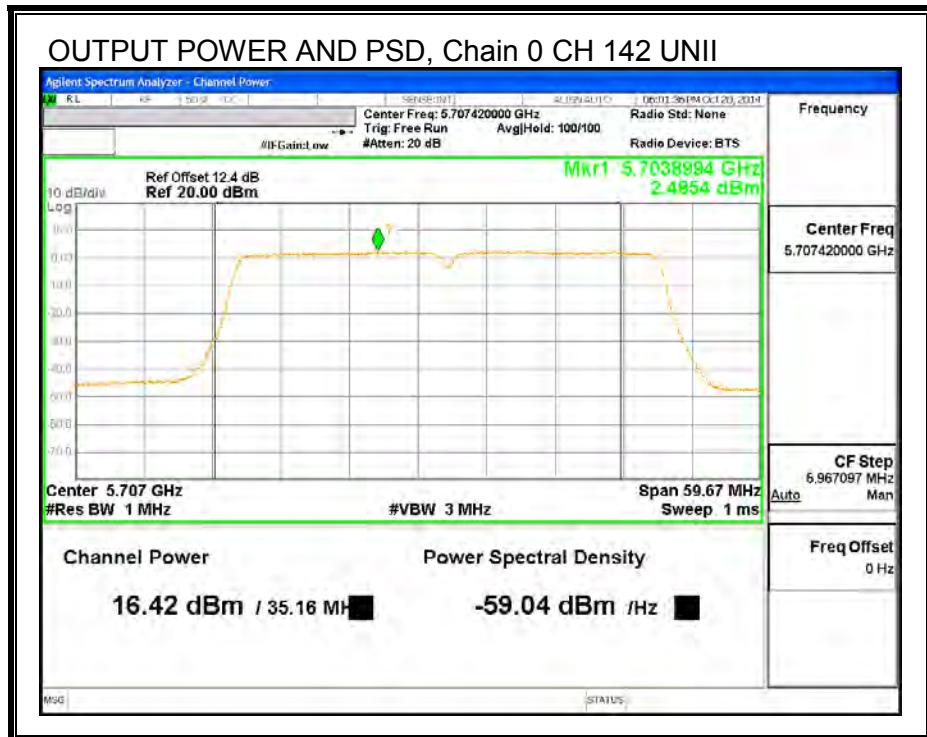

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	4.79	30.00	30.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	6.13	6.15	9.15	30.00	-20.85

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-1.16	-1.02	1.92	30.00	-28.08

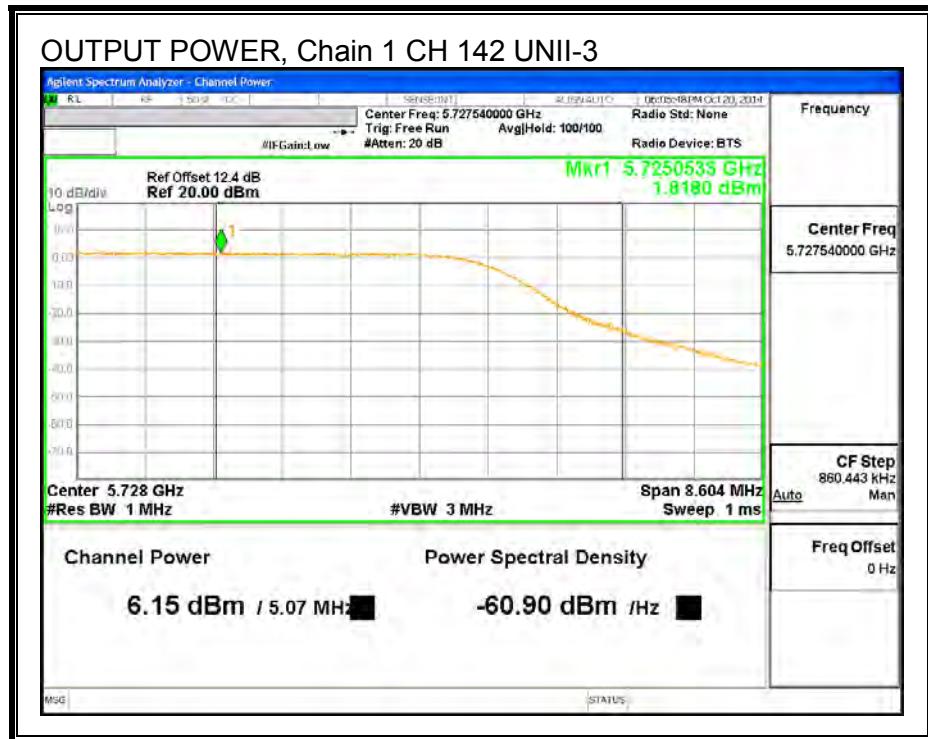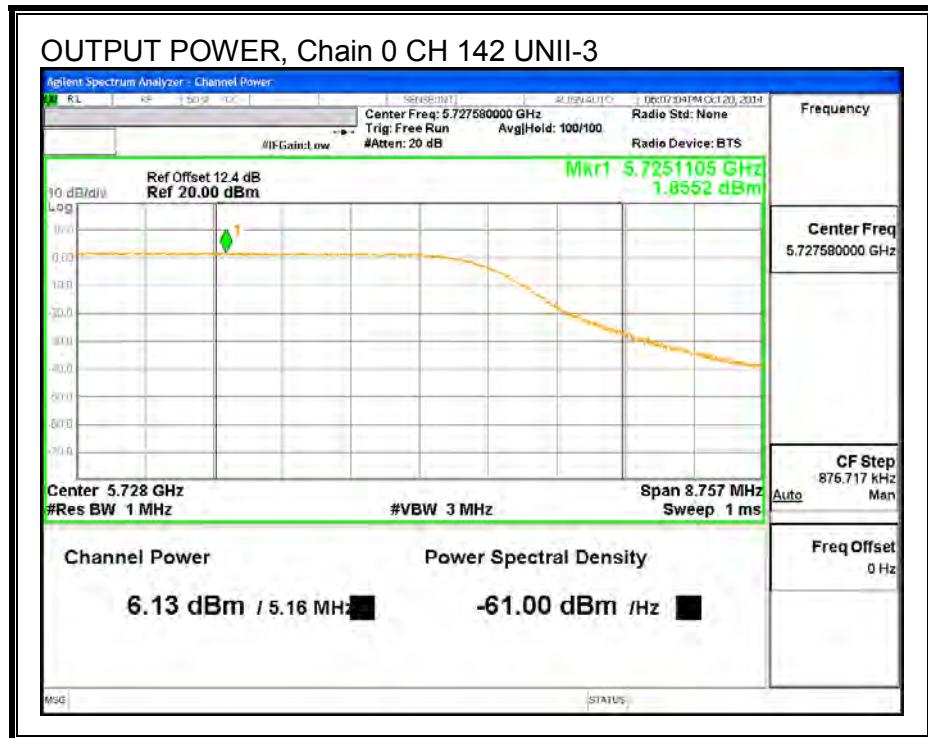

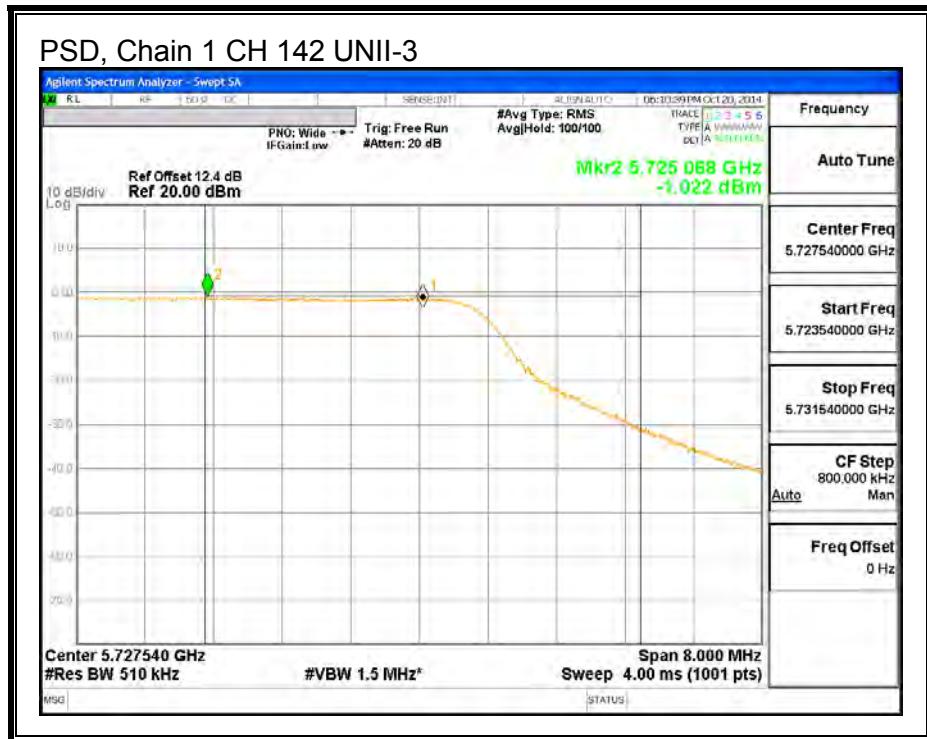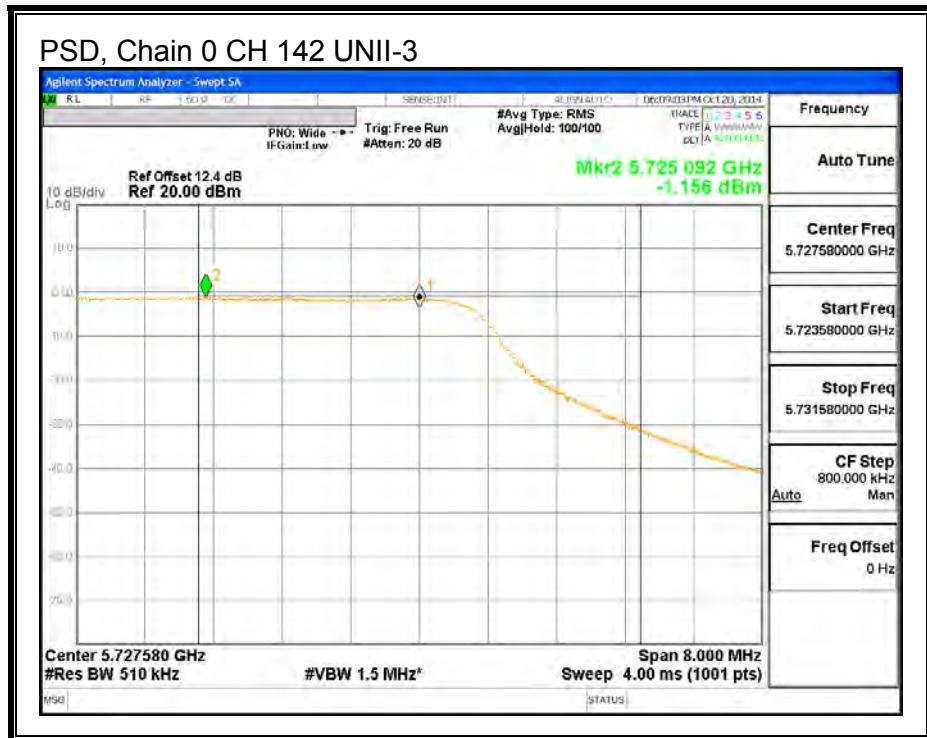

## 9.32. 802.11ac VHT40 2TX BF IN THE 5.6 GHz BAND

Refer to Section 9.30, 802.11n HT40 2TX CDD MODE IN THE 5.6 GHz BAND

The power per chain used for 802.11n HT40 2TX CDD IN THE 5.6 GHz mode is the same power per chain that will be for 802.11n HT40 2TX BF IN THE 5.6 GHz mode. However, since BF is correlated and CDD is uncorrelated for output power, the section below for output power using correlated antenna gain for this mode shows it is still compliant.

### 9.32.1. OUTPUT POWER

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
5.00	4.57	7.80

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5510	40.68	7.80	22.20
Mid	5550	40.56	7.80	22.20
High	5670	40.38	7.80	22.20
142	5710	40.38	7.80	22.20

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power
--------------------	------	--

### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.94	12.97	16.09	22.20	-6.11
Mid	5550	16.98	16.93	20.09	22.20	-2.11
High	5670	16.93	16.94	20.07	22.20	-2.13
142	5710	16.98	17.00	20.12	22.20	-2.08

**STRADDLE CHANNEL 142 RESULTS**

**UNII-2C BAND**



**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	35.04	7.80	7.80	22.20	9.20

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	16.47	16.38	19.56	22.20	-2.64

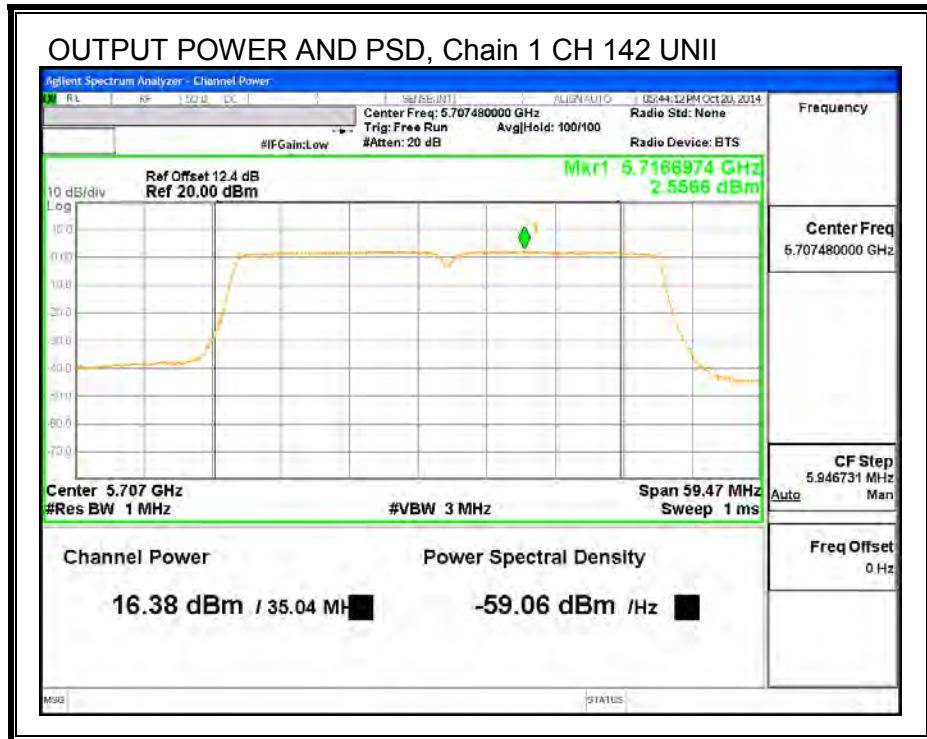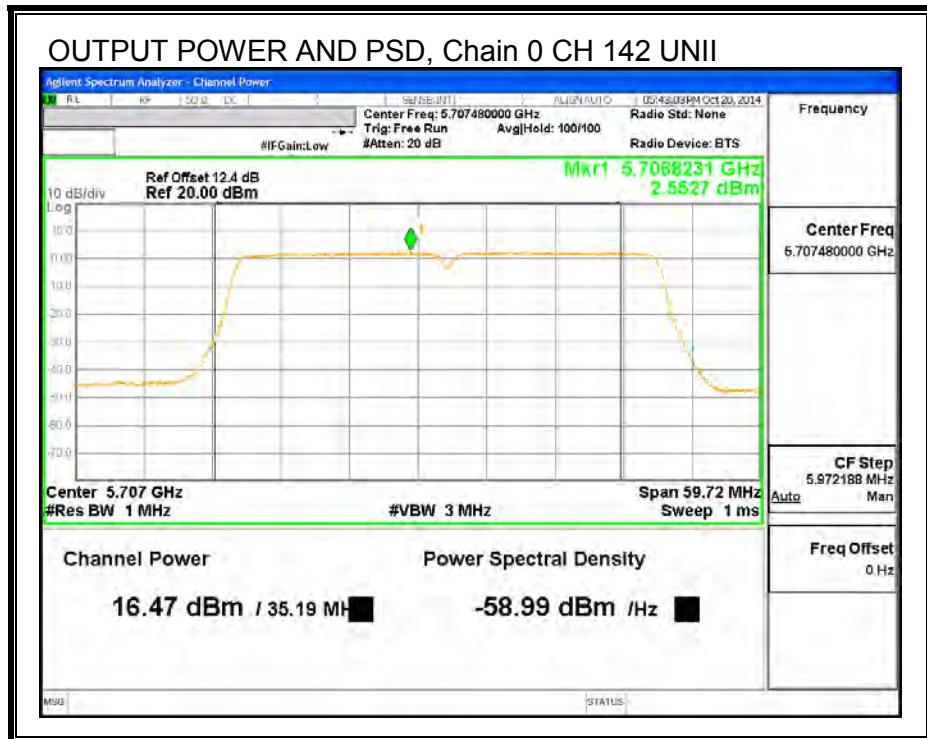

**UNII-3 BAND**



**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	7.80	28.20	28.20

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	6.11	6.14	9.26	28.20	-18.94

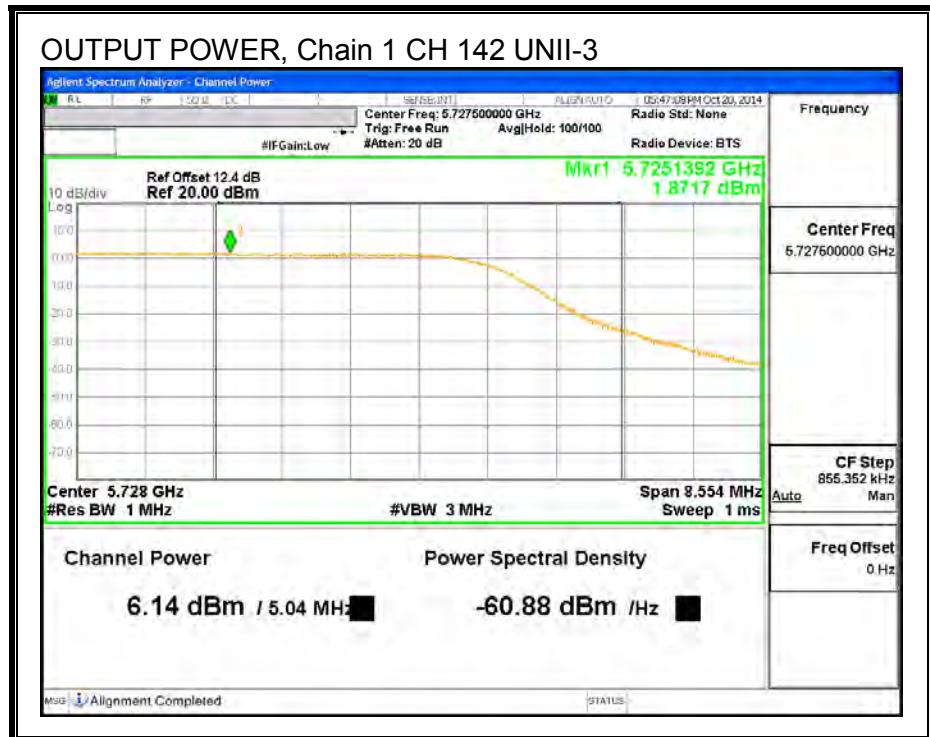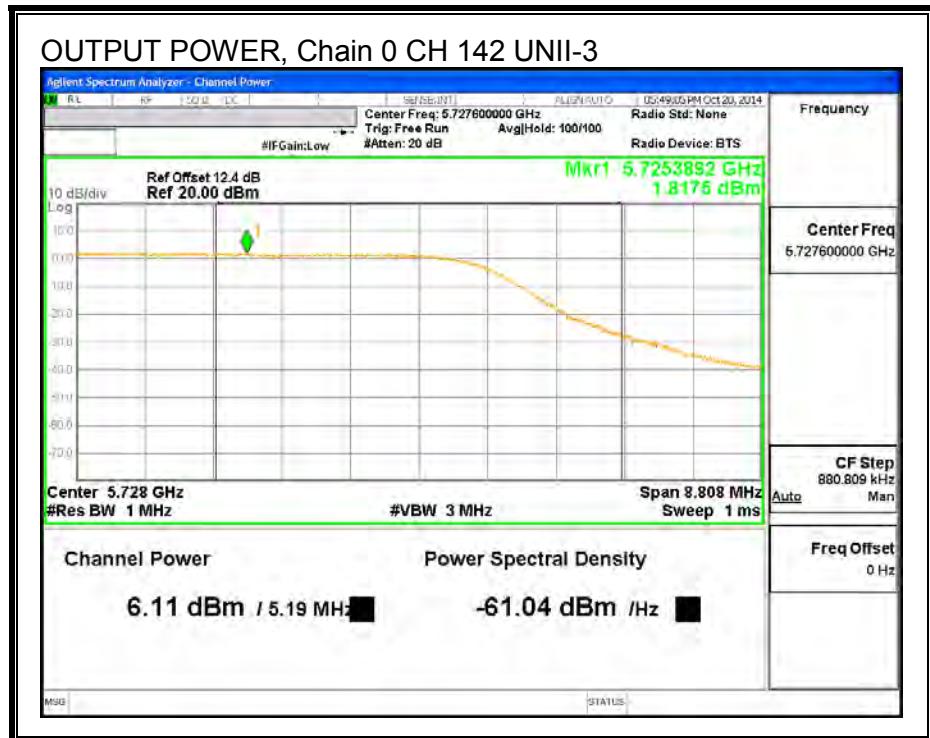

## 9.33. 802.11ac VHT80 1TX MODE IN THE 5.6 GHz BAND

### 9.33.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5530	82.20
Mid	5610	82.40
High	5690	81.84

**26 dB BANDWIDTH**

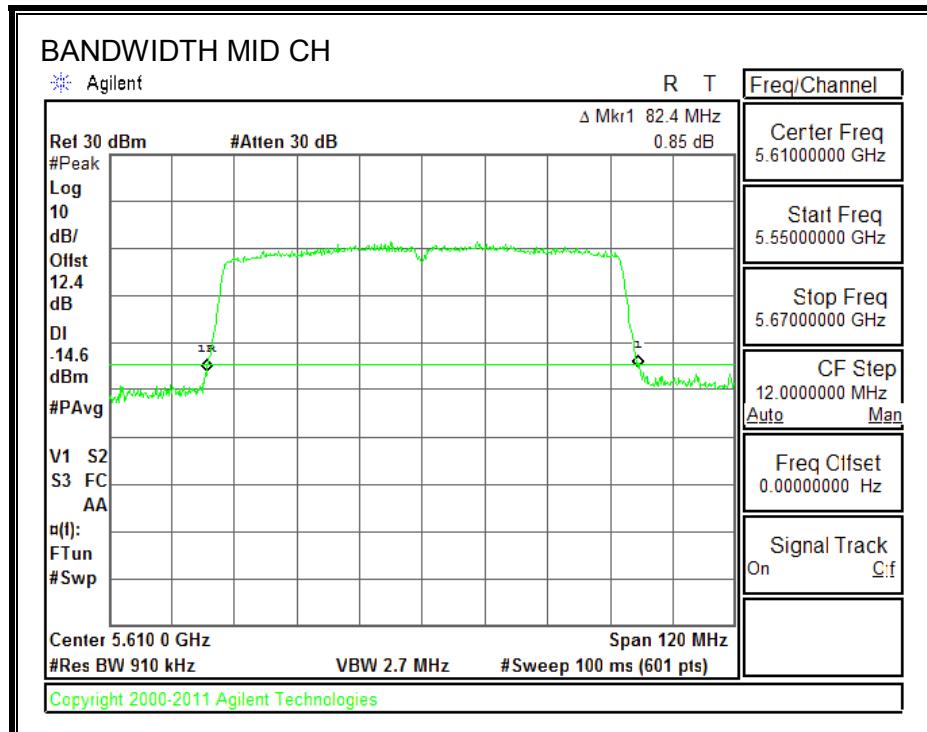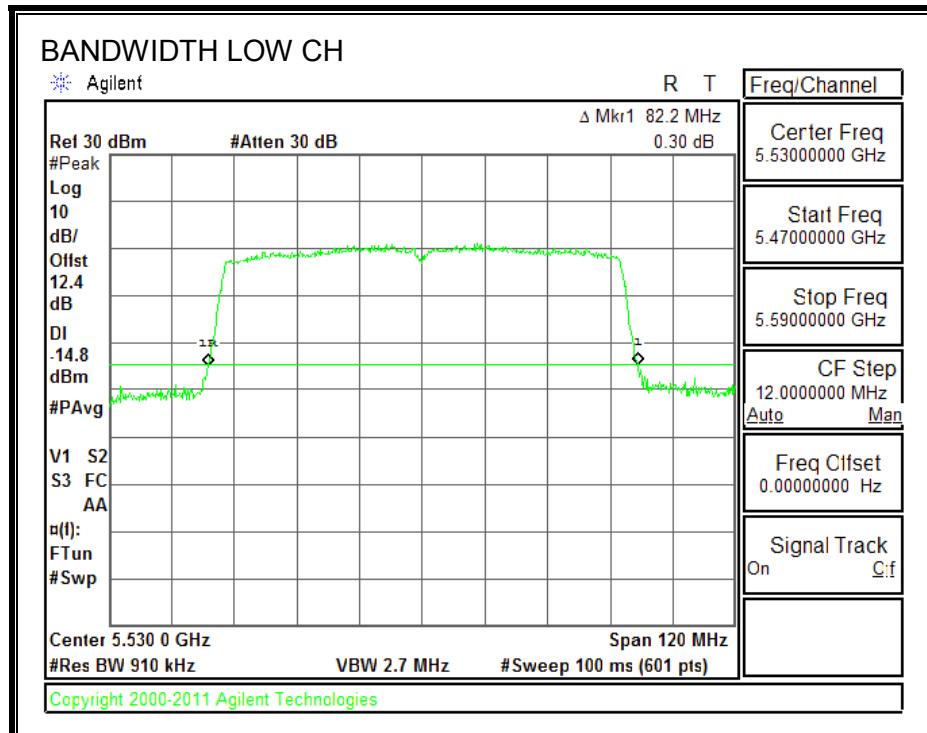

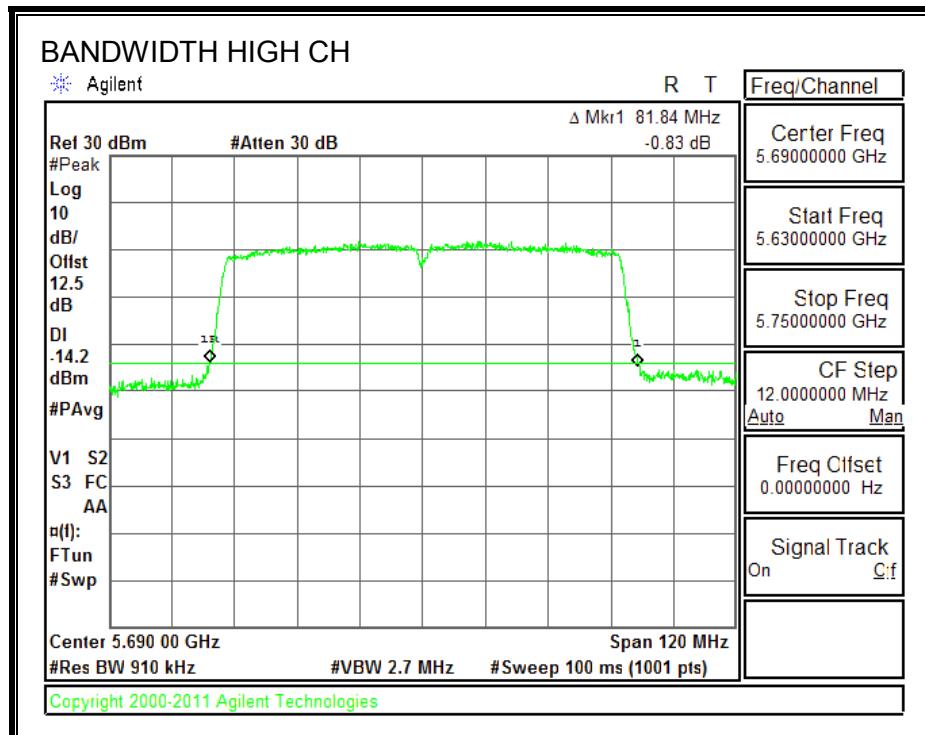

### 9.33.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5530	75.3901
Mid	5610	75.4267
High	5690	75.5125

**99% BANDWIDTH**

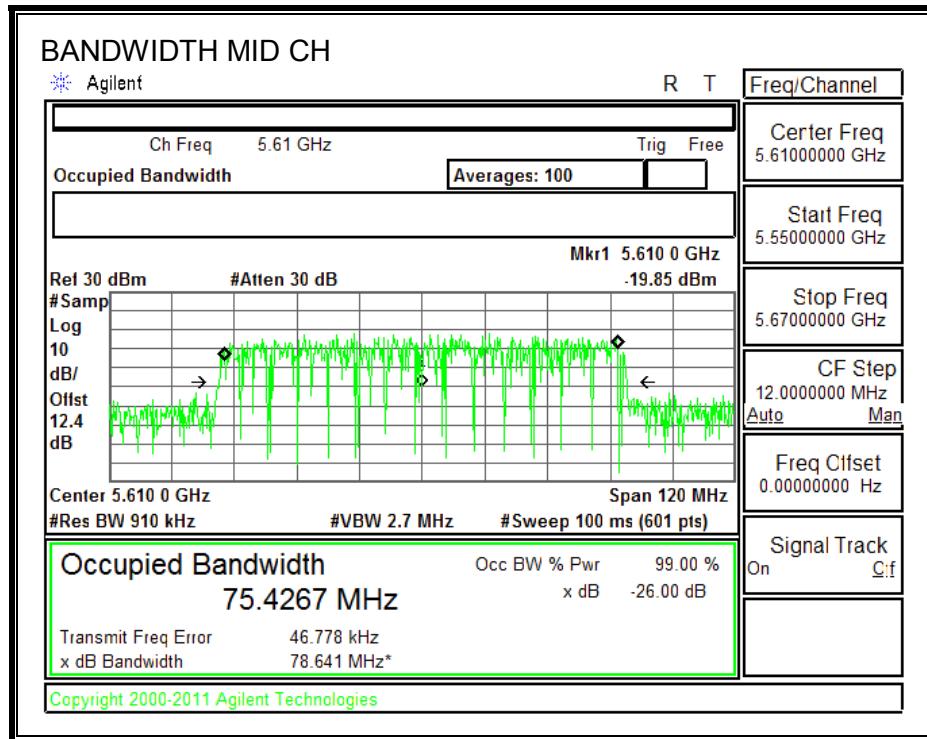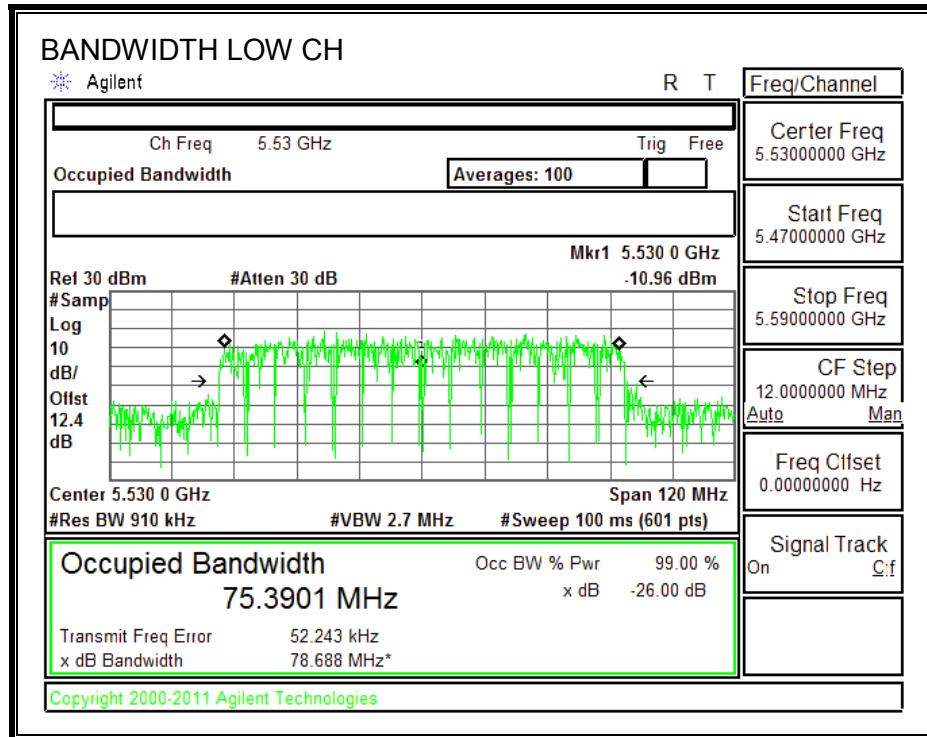

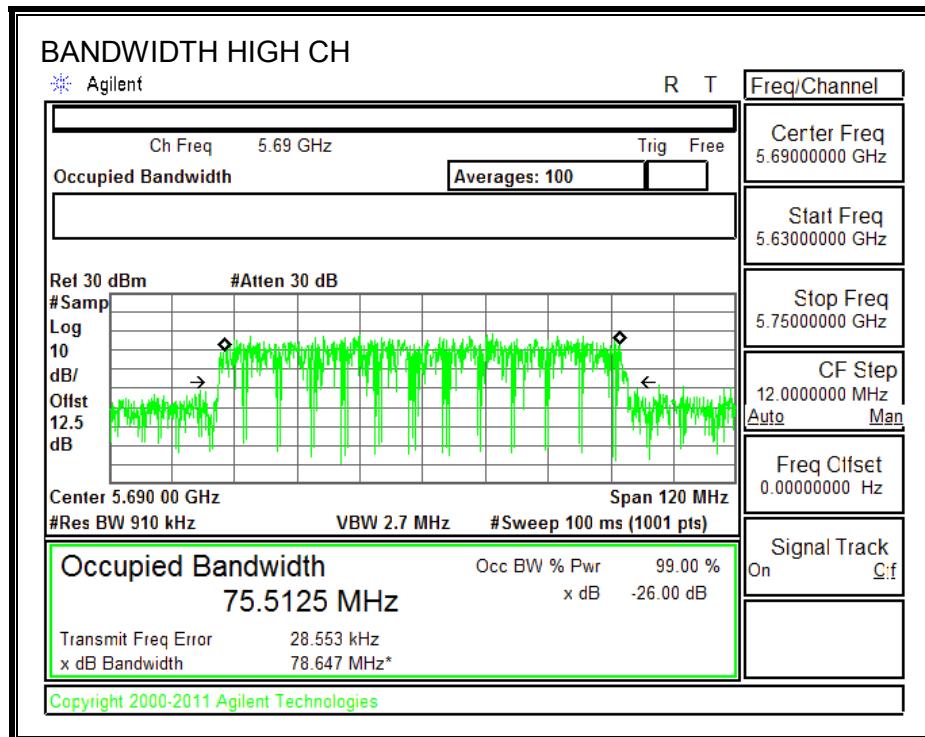

### 9.33.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### ANTENNA 0

Antenna Gain (dBi)
5.00

#### ANTENNA 1

Antenna Gain (dBi)
4.57

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	82.20	5.00	24.00	11.00
Mid	5610	82.40	5.00	24.00	11.00
High	5690	81.84	5.00	24.00	11.00

Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	11.75	11.97	24.00	-12.03
Mid	5610	17.74	17.96	24.00	-6.04
High	5690	17.78	18.00	24.00	-6.00

### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5530	-1.24	-1.02	11.00	-12.02
Mid	5610	1.11	1.33	11.00	-9.68

**PSD, Chain 0**

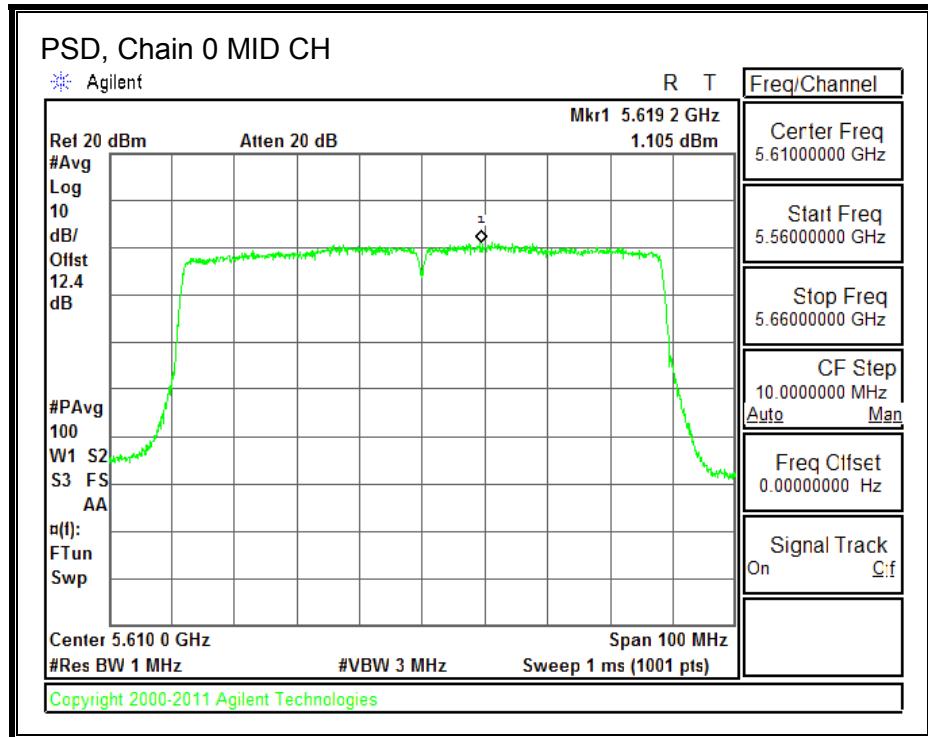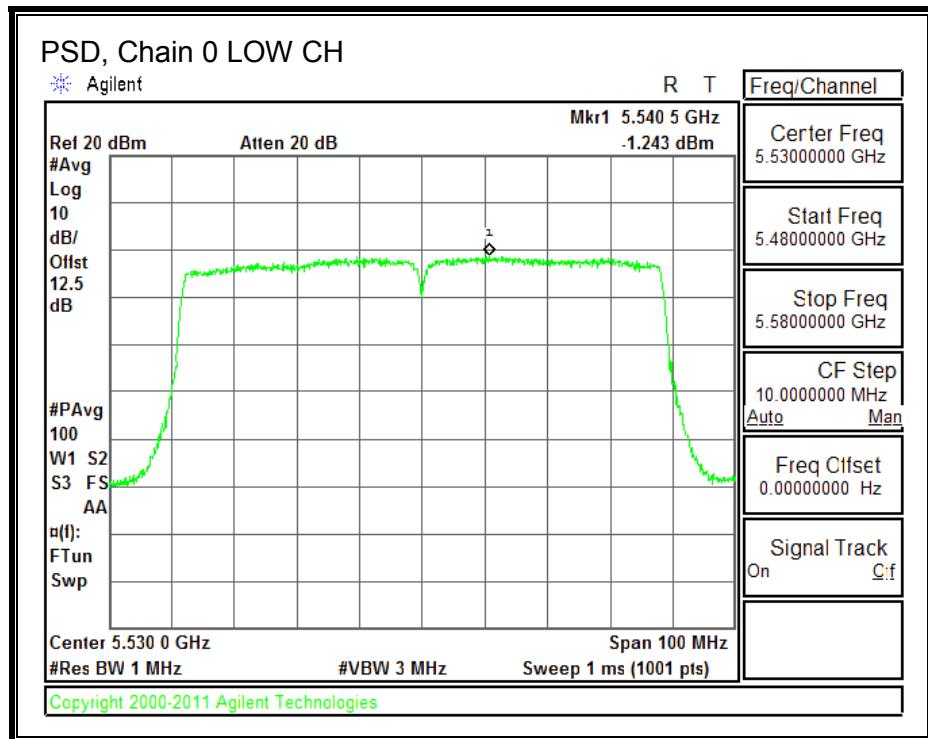

**STRADDLE CHANNEL 138 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	75.92	5.00	5.00	24.00	11.00


Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	17.76	17.98	24.00	-6.02

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	1.25	1.47	11.00	-9.53

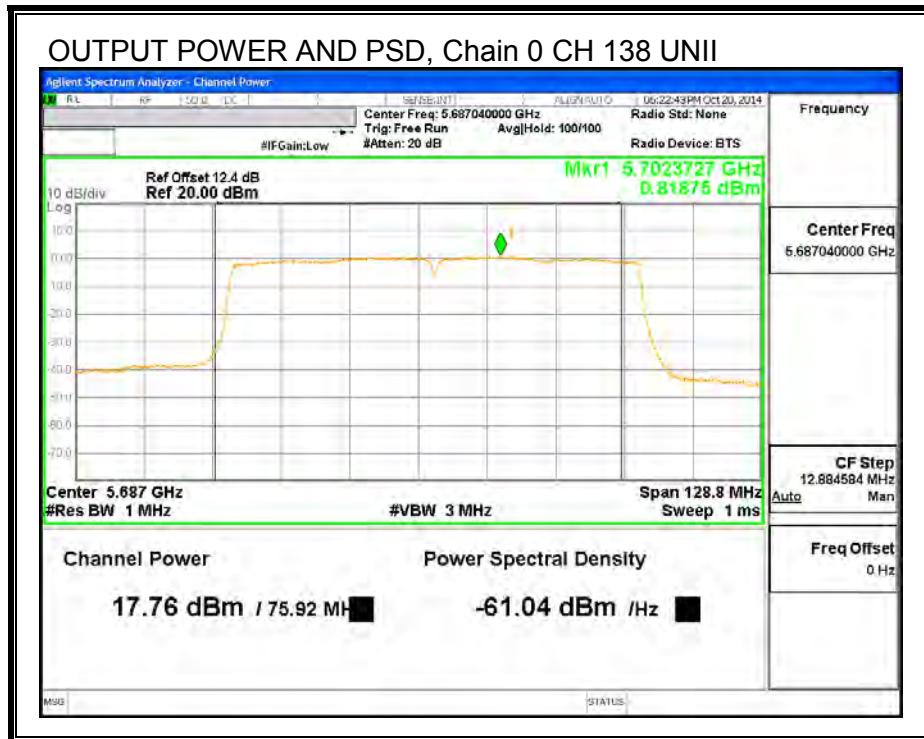

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	5.00	30.00	30.00



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	3.51	3.73	30.00	-26.27

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-3.67	-3.45	30.00	-33.45

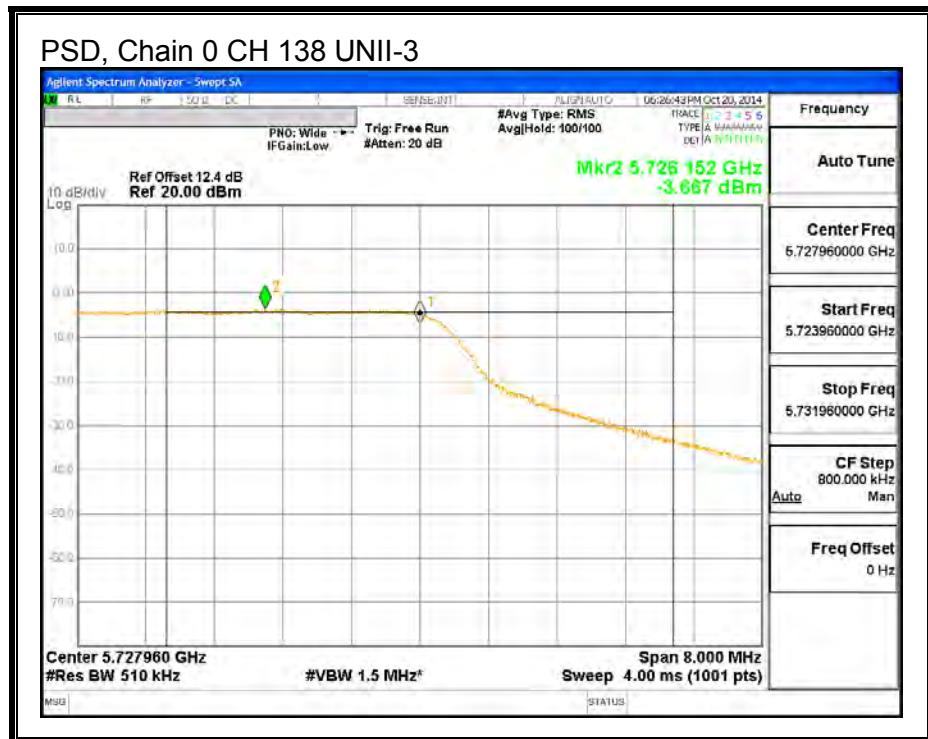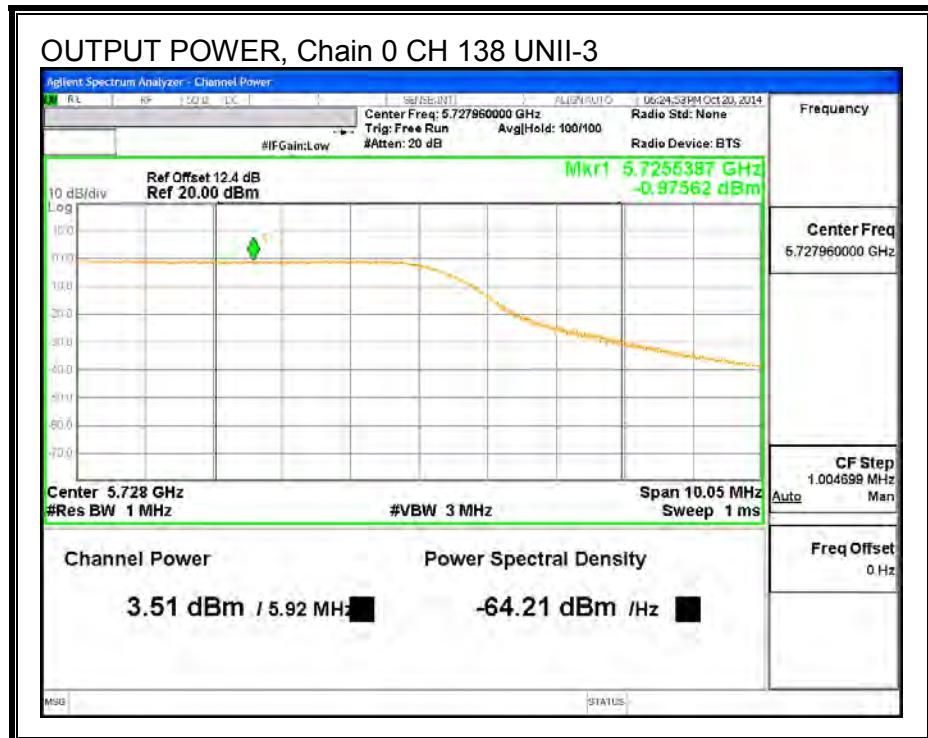

## 9.34. 802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND

### 9.34.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5530	82.20	82.00
Mid	5610	82.20	82.00
High	5690	82.20	81.84


**26 dB BANDWIDTH, Chain 0**

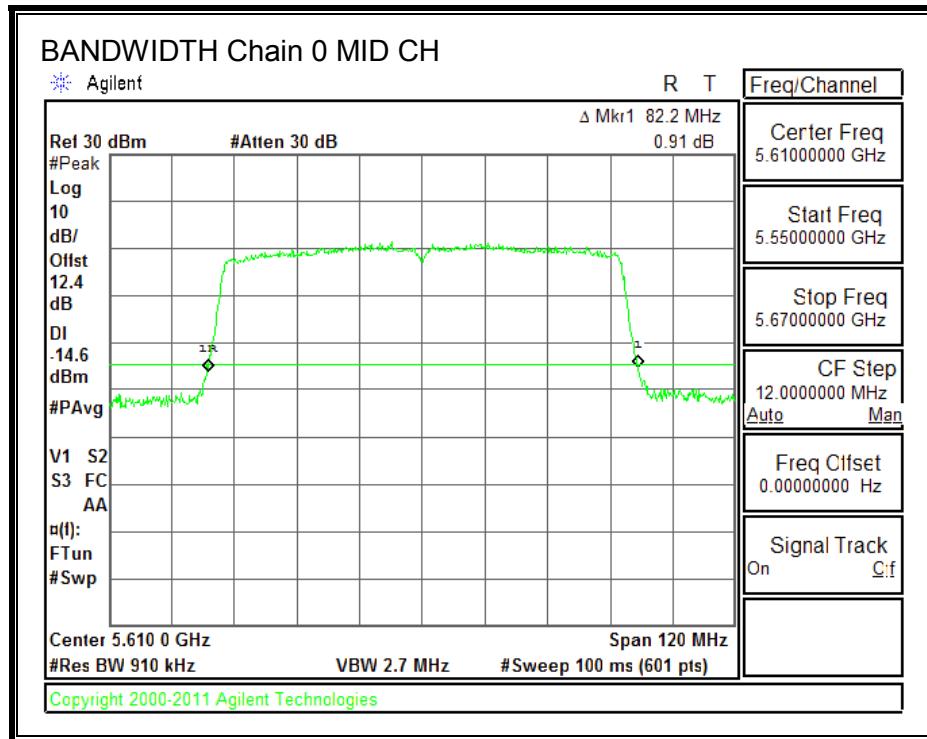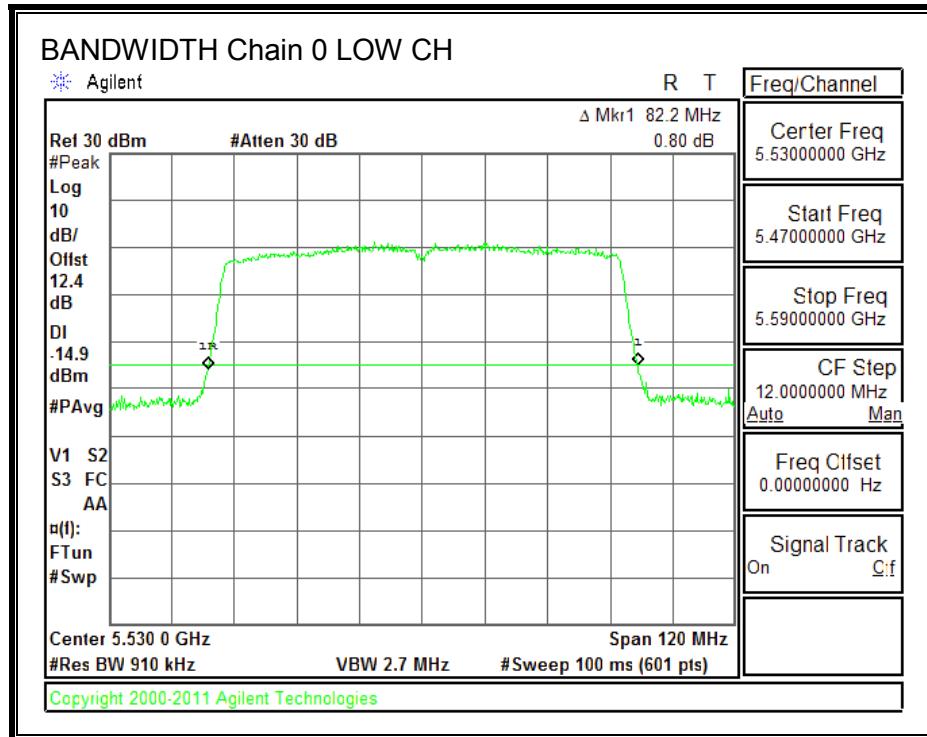

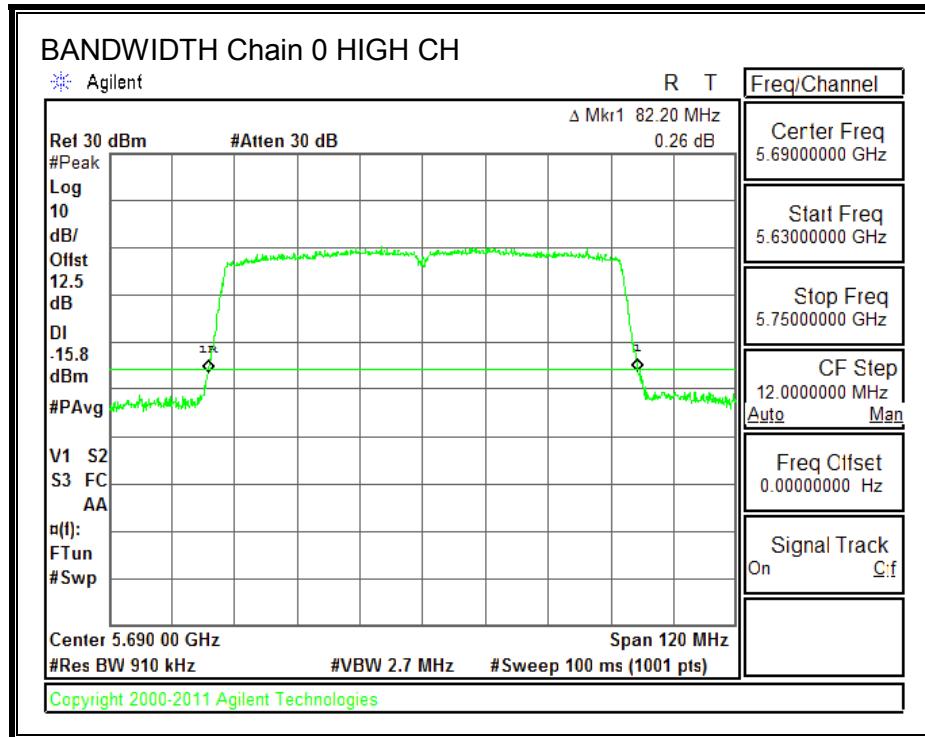

**26 dB BANDWIDTH, Chain 1**

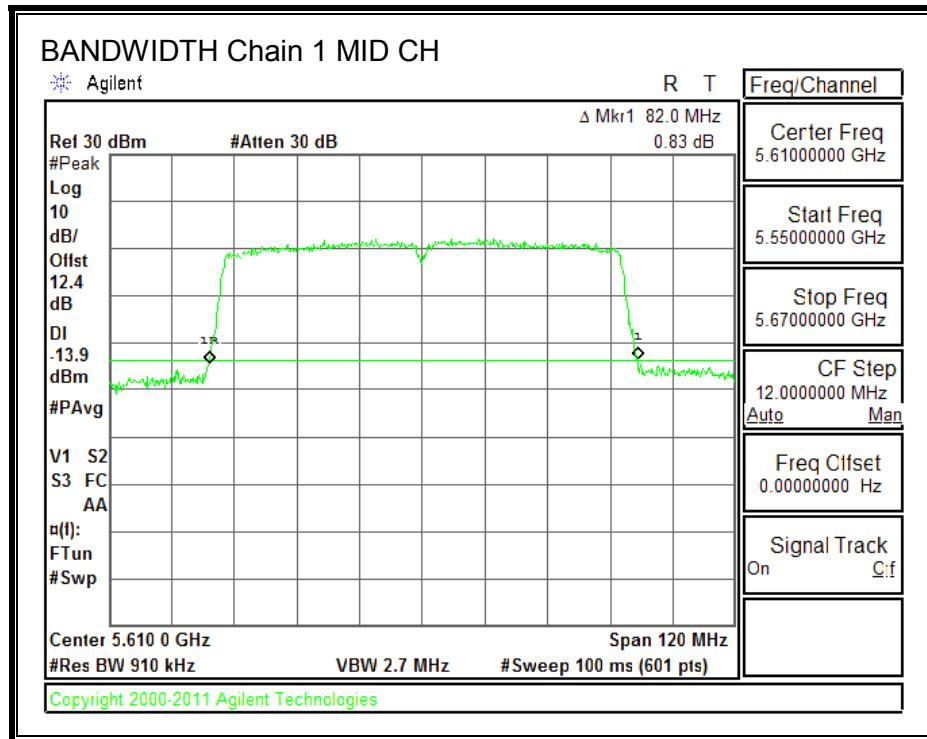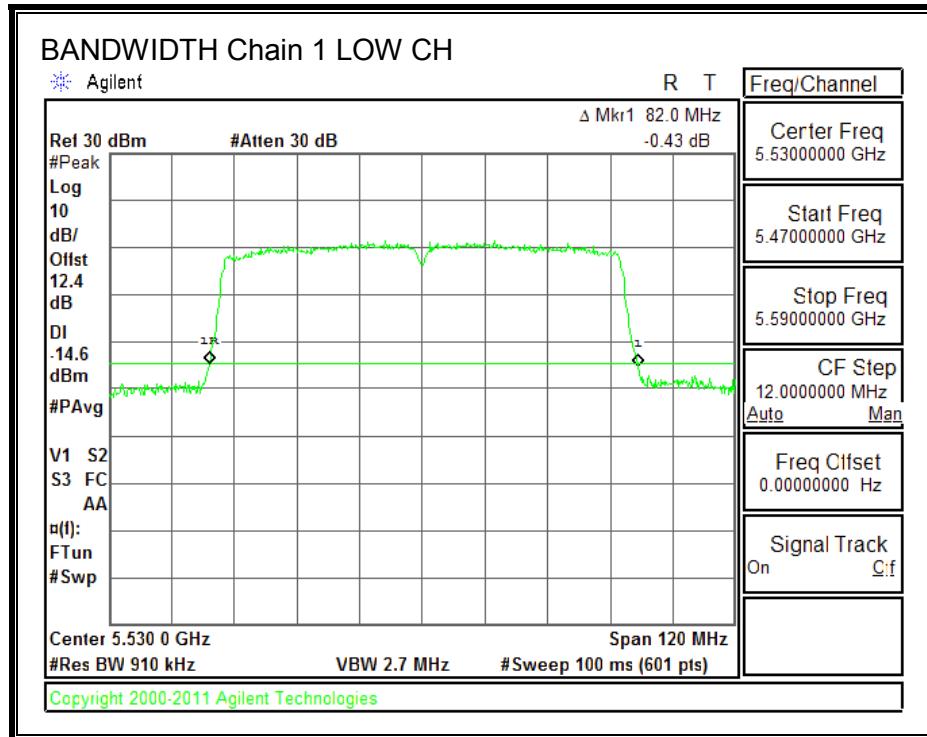

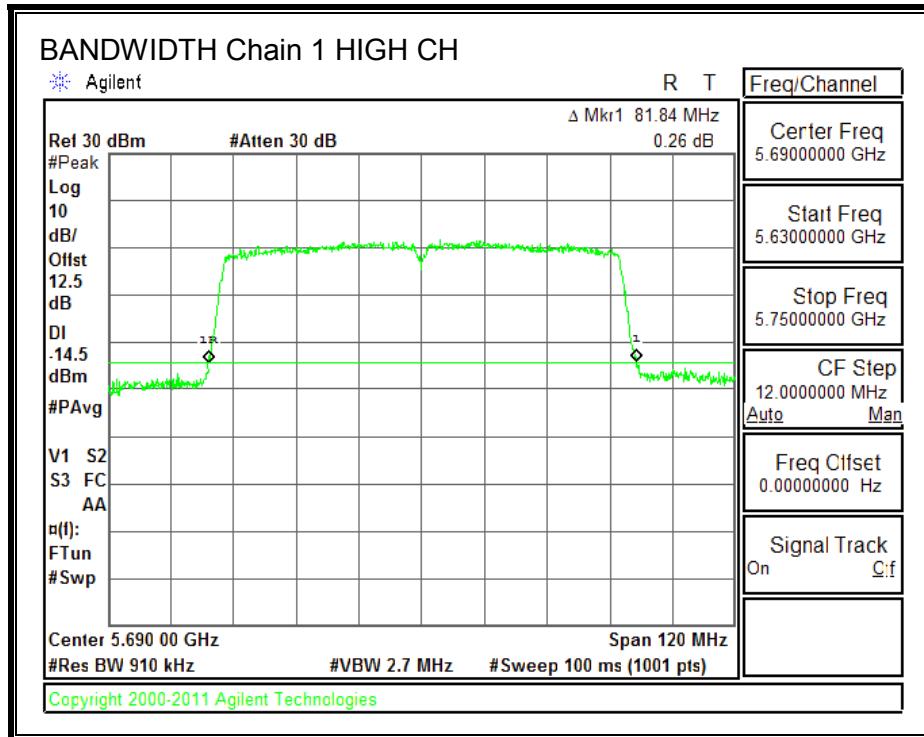

### 9.34.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5530	75.3195	75.3402
Mid	5610	75.3783	75.4174
High	5690	75.4839	75.5309


**99% BANDWIDTH, Chain 0**

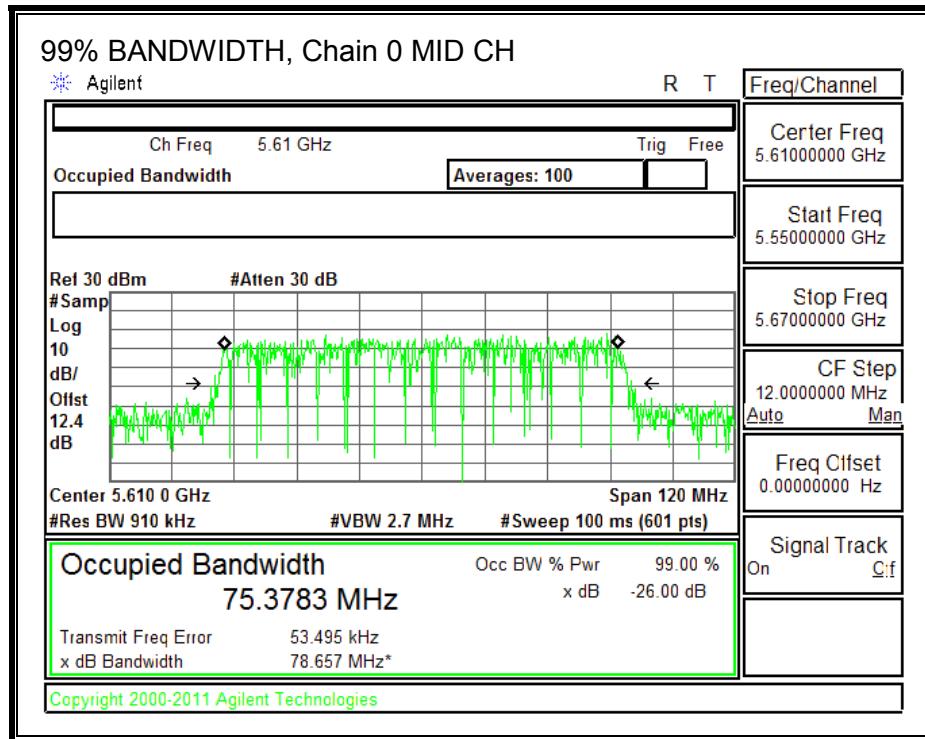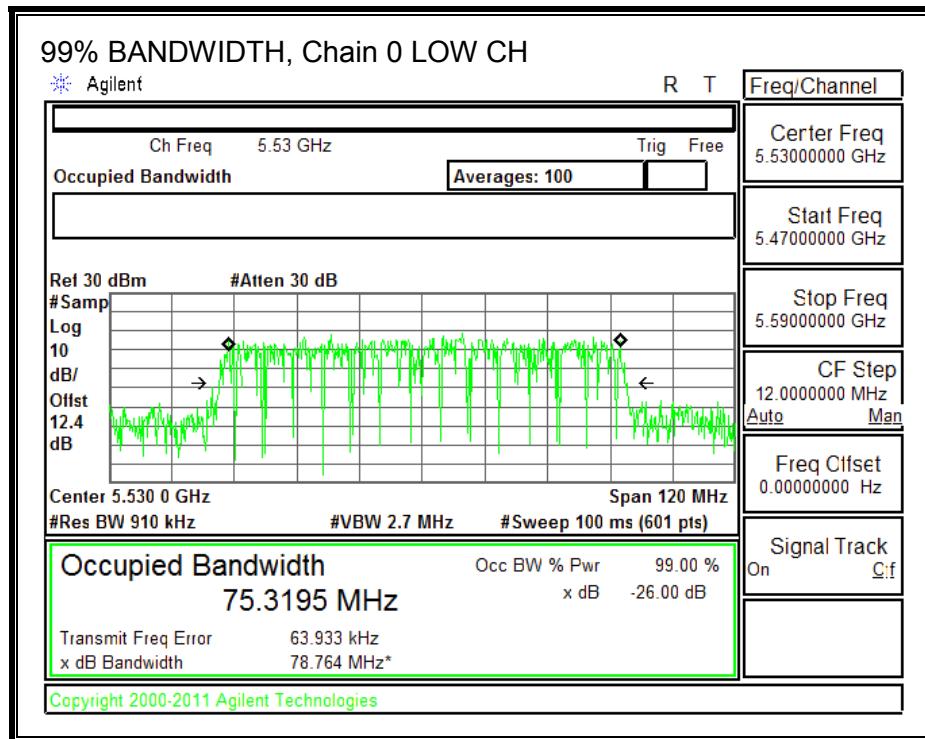

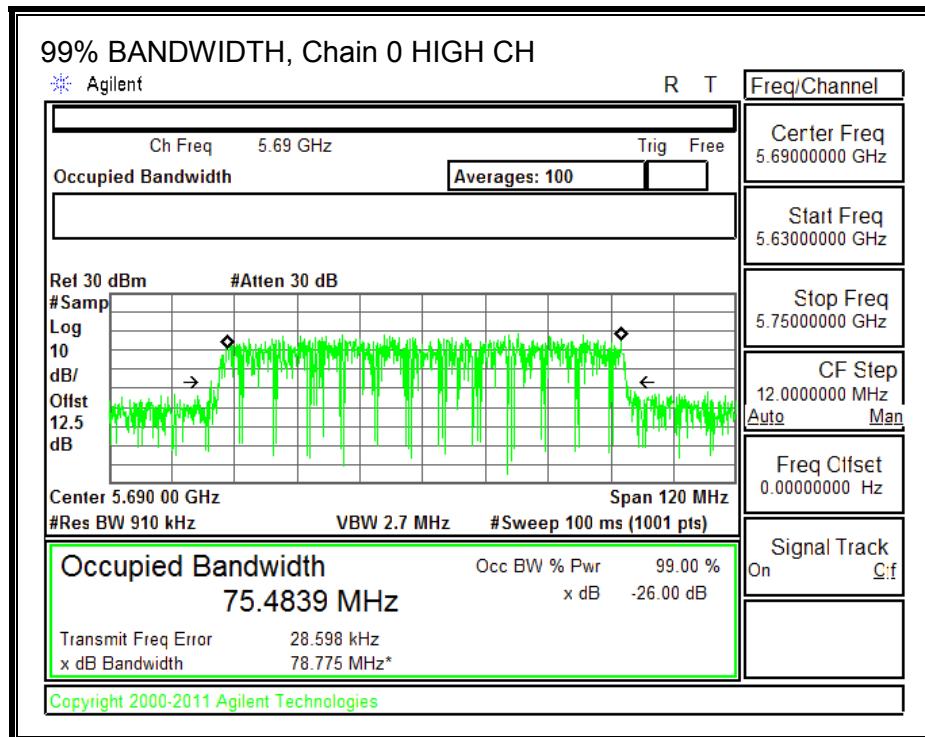

**99% BANDWIDTH, Chain 1**

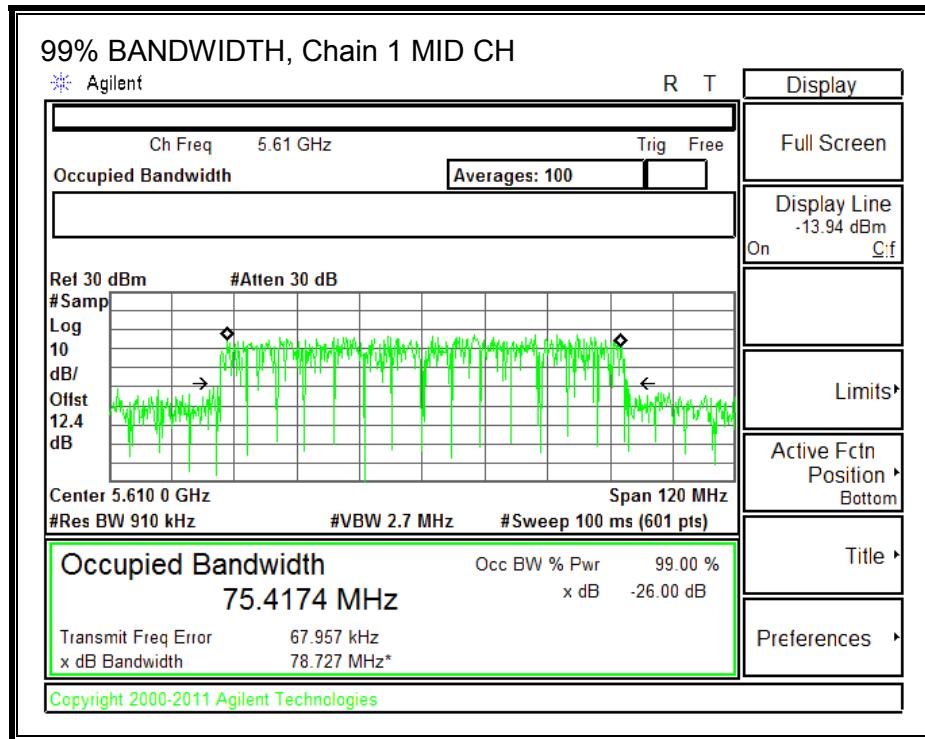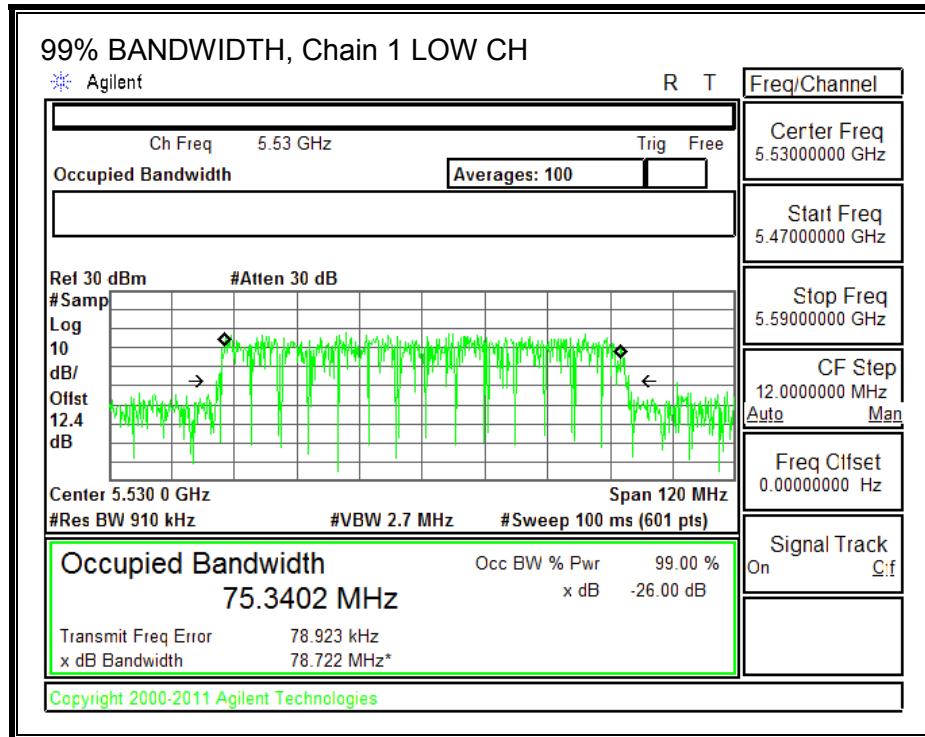

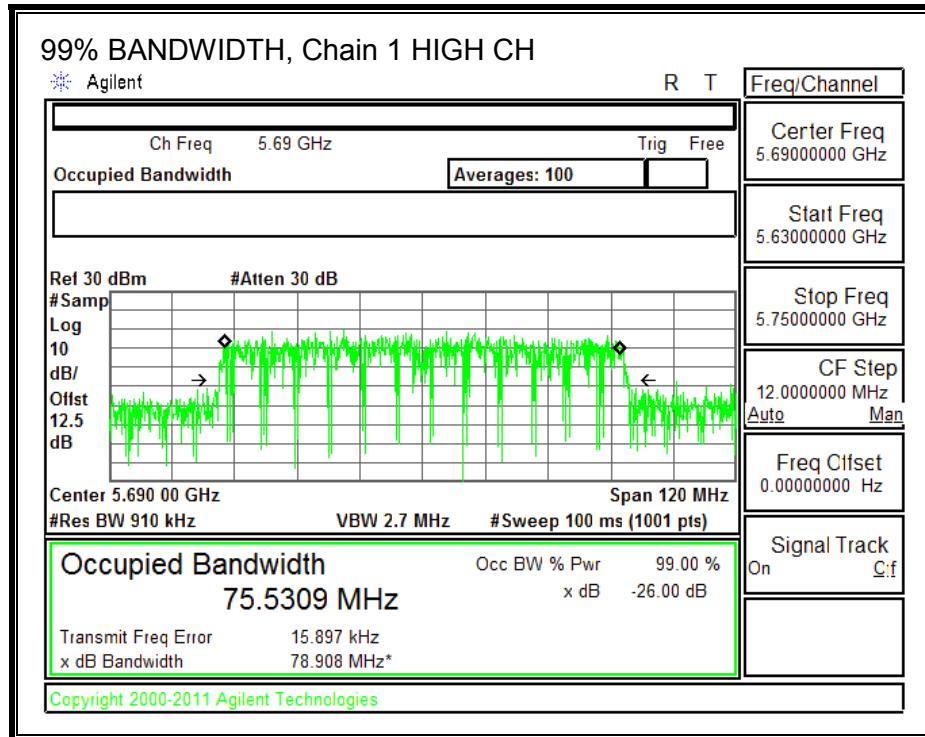

### 9.34.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
5.00	4.57	4.79

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
5.00	4.57	7.80

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	82.20	4.79	7.80	24.00	9.20
Mid	5610	82.20	4.79	7.80	24.00	9.20
High	5690	82.20	4.79	7.80	24.00	9.20

Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	10.76	10.78	14.00	24.00	-10.00
Mid	5610	17.70	17.79	20.98	24.00	-3.02
High	5690	17.76	17.78	21.00	24.00	-3.00



### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5530	-5.85	-5.68	-2.53	9.20	-11.73
Mid	5610	0.70	1.07	4.12	9.20	-5.08

**PSD, Chain 0**

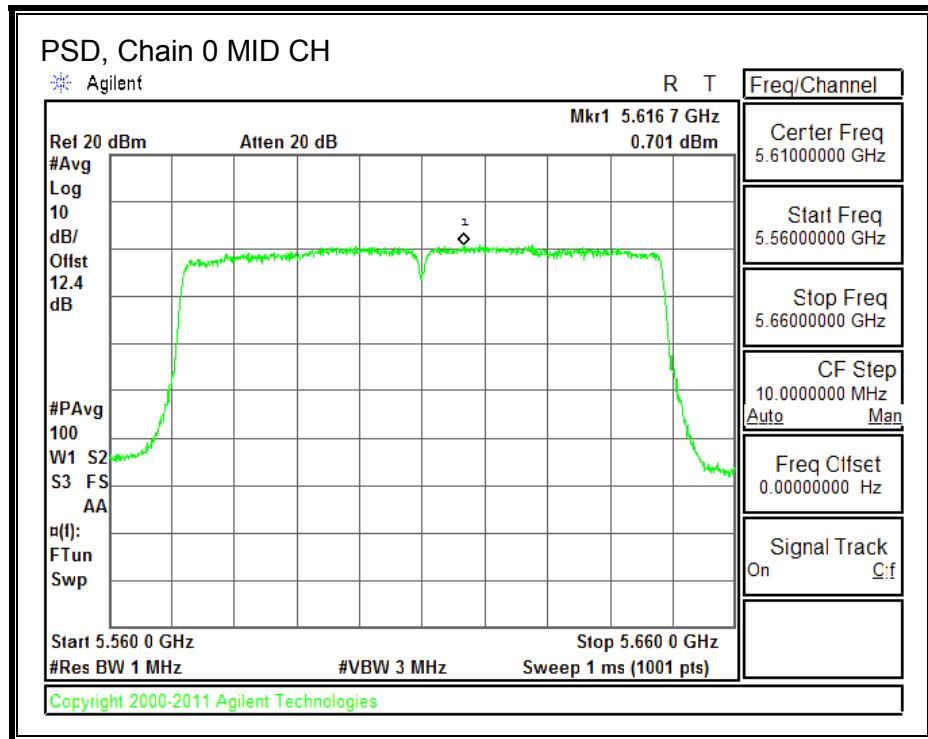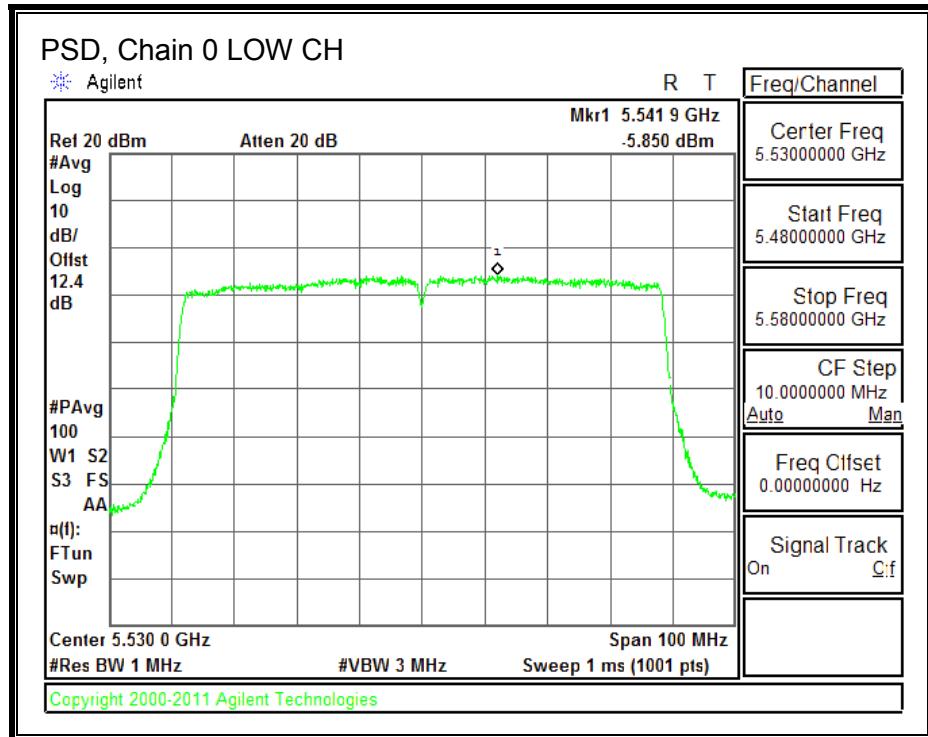

**PSD, Chain 1**

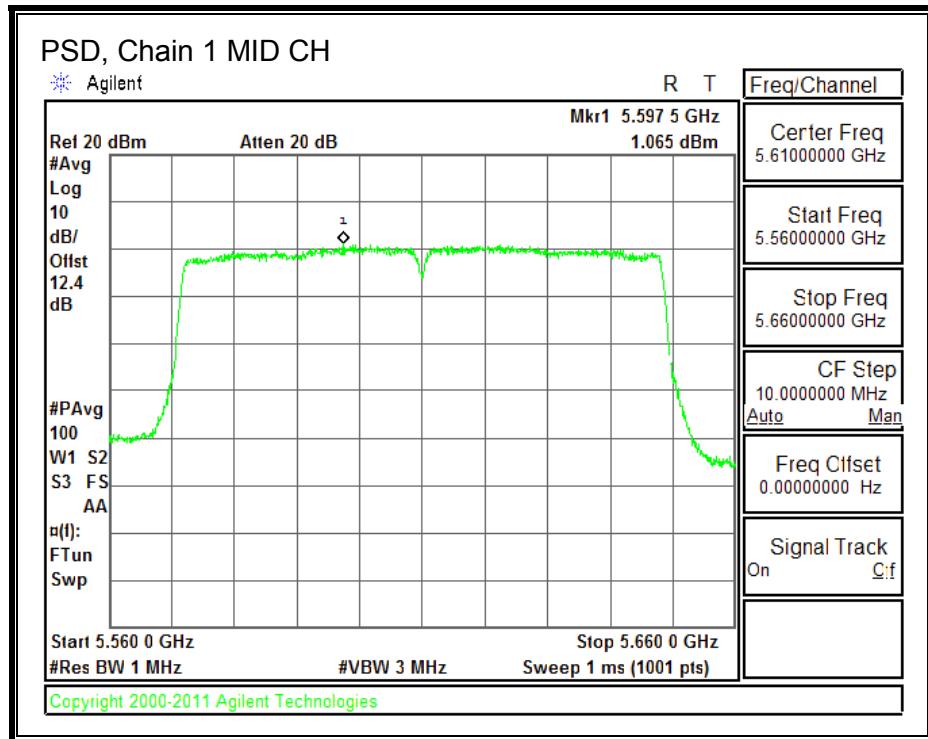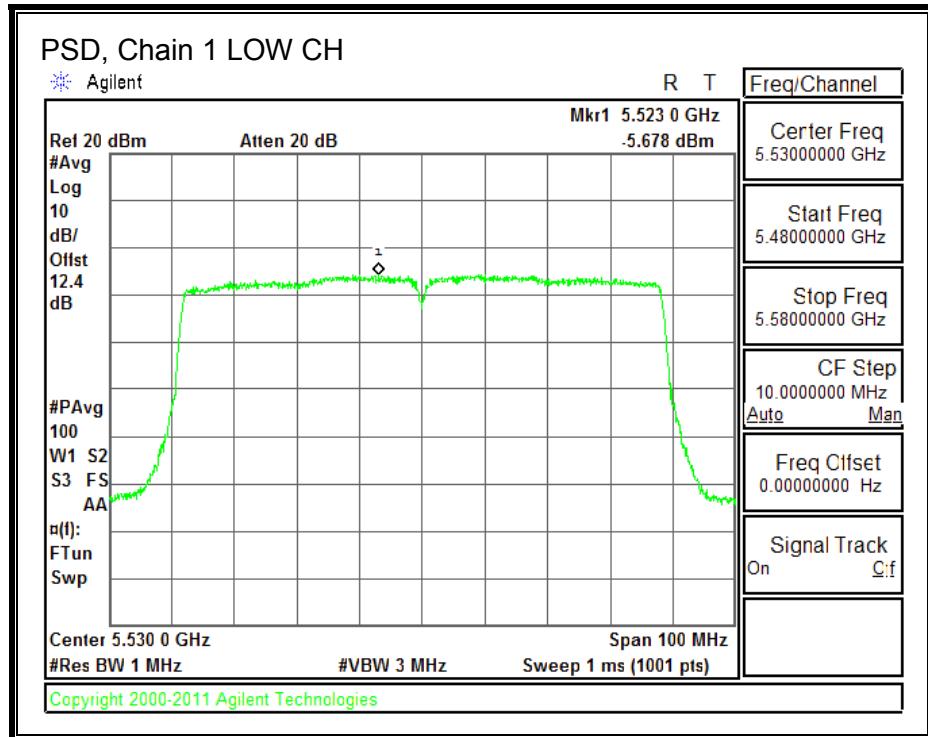

**STRADDLE CHANNEL 138 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	75.10	4.79	7.80	24.00	9.20



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	17.59	17.81	20.93	24.00	-3.07

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	0.83	0.83	4.06	9.20	-5.14

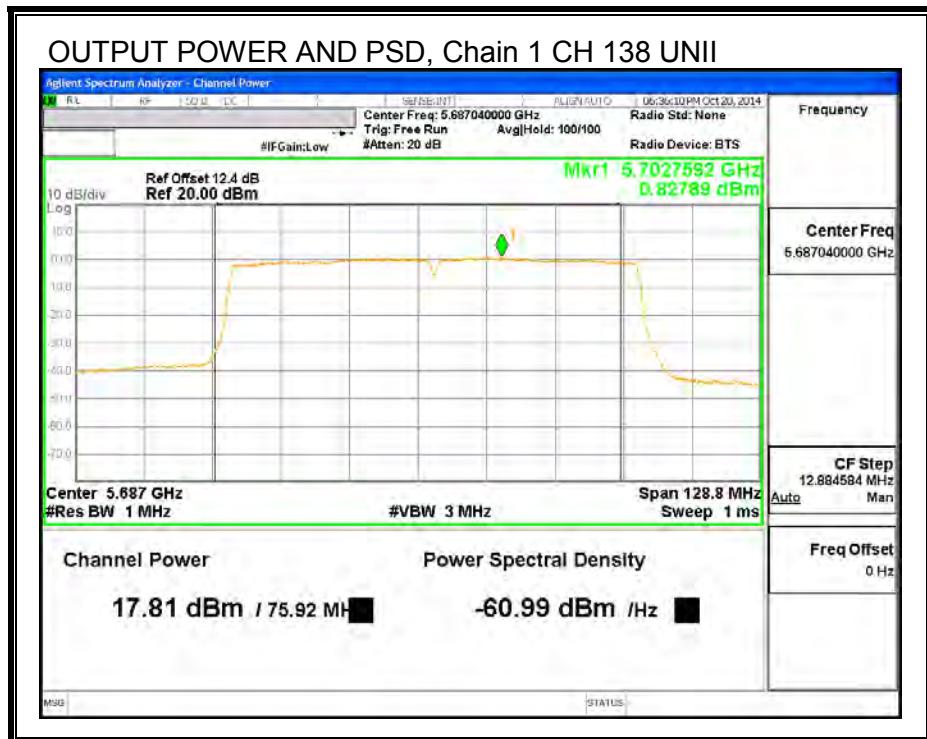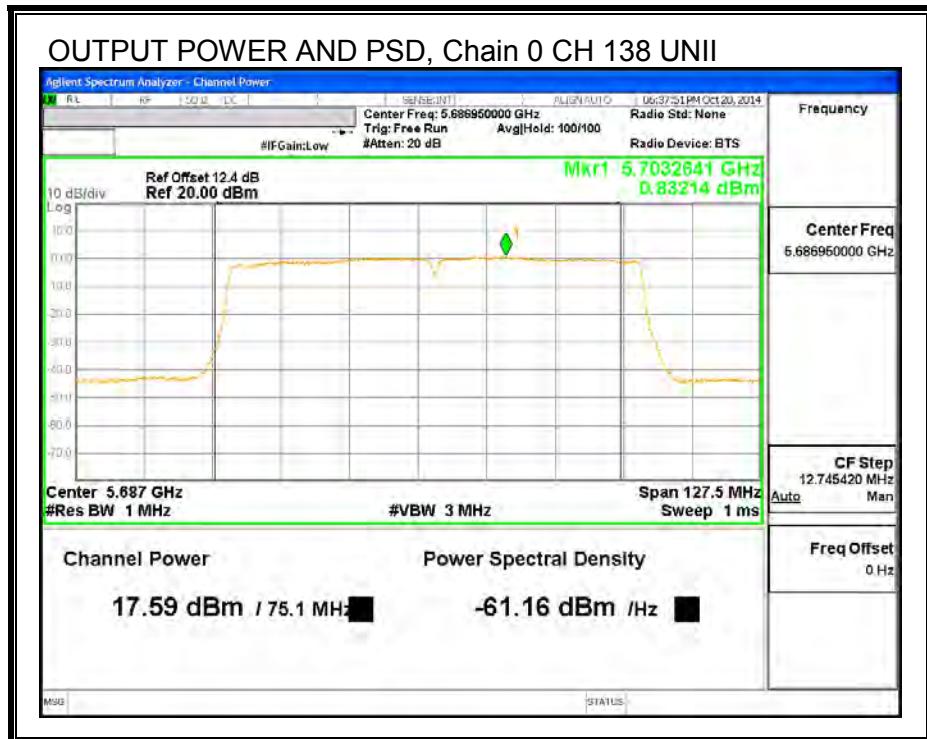

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	4.79	7.80	30.00	28.20



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	3.76	3.63	6.93	30.00	-23.07

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-3.42	-3.41	-0.19	28.20	-28.39

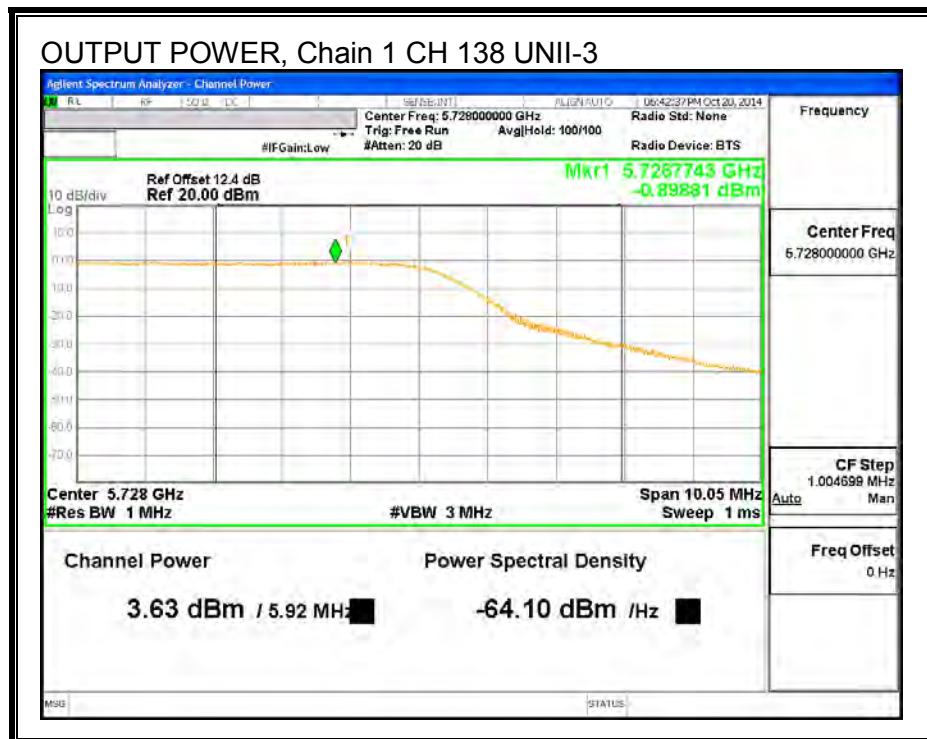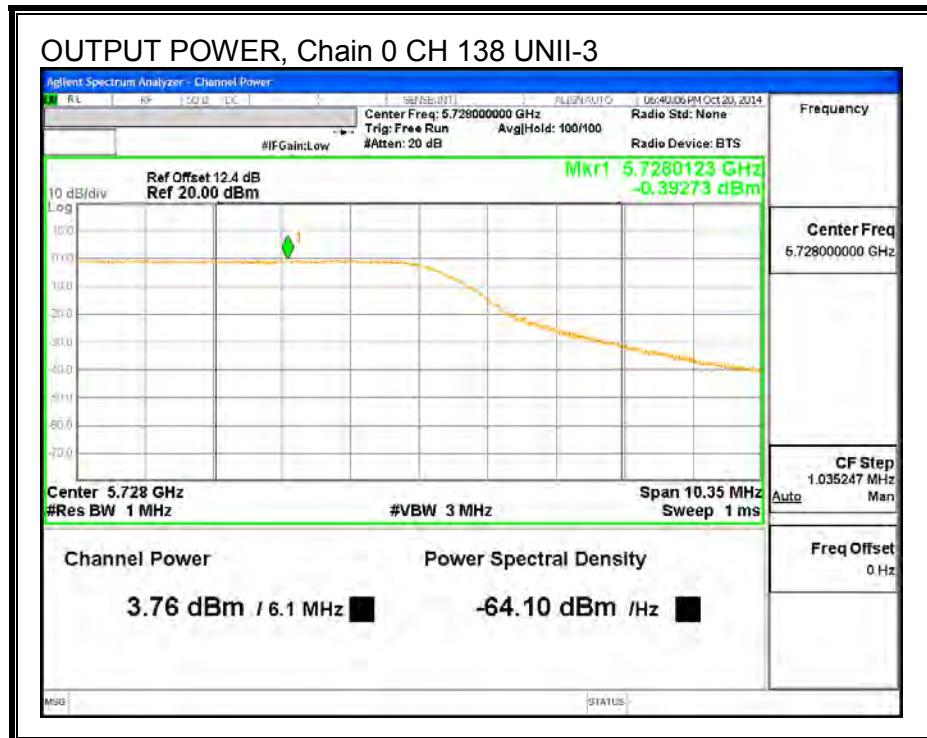

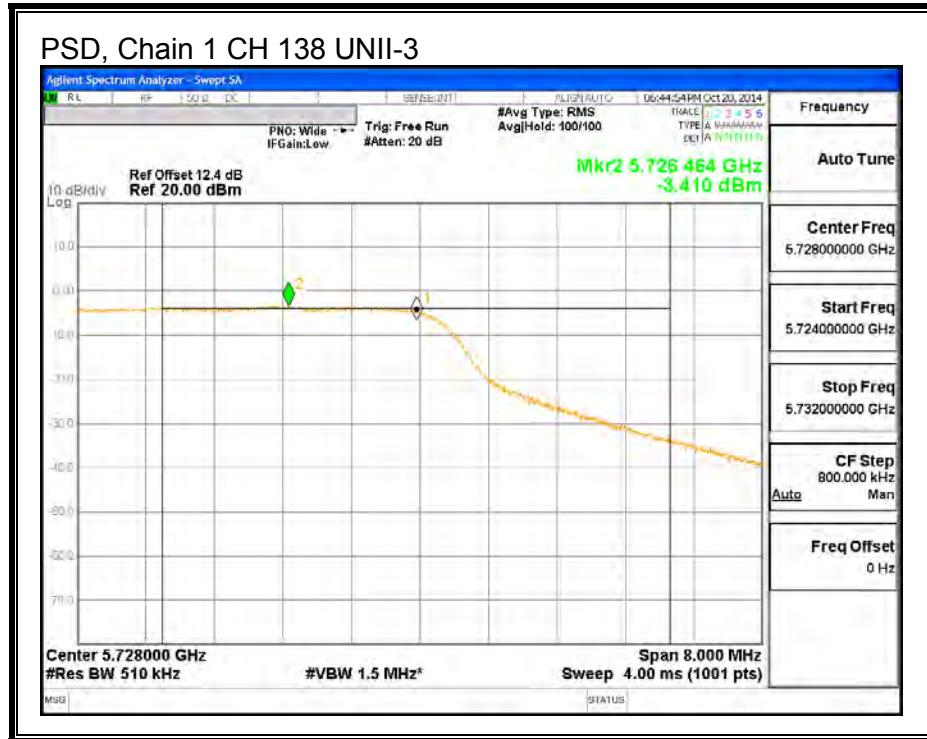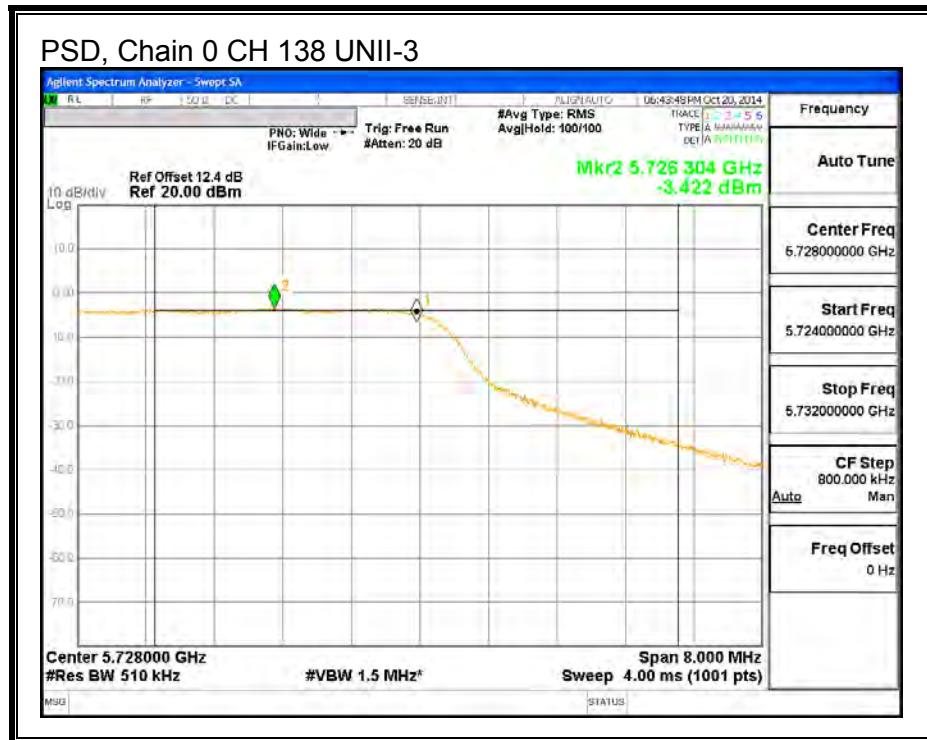

## 9.35. 802.11ac VHT80 2TX STBC MODE IN THE 5.6 GHz BAND

### 9.35.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5530	82.20	82.20
Mid	5610	82.20	81.60
High	5690	81.84	81.72


**26 dB BANDWIDTH, Chain 0**

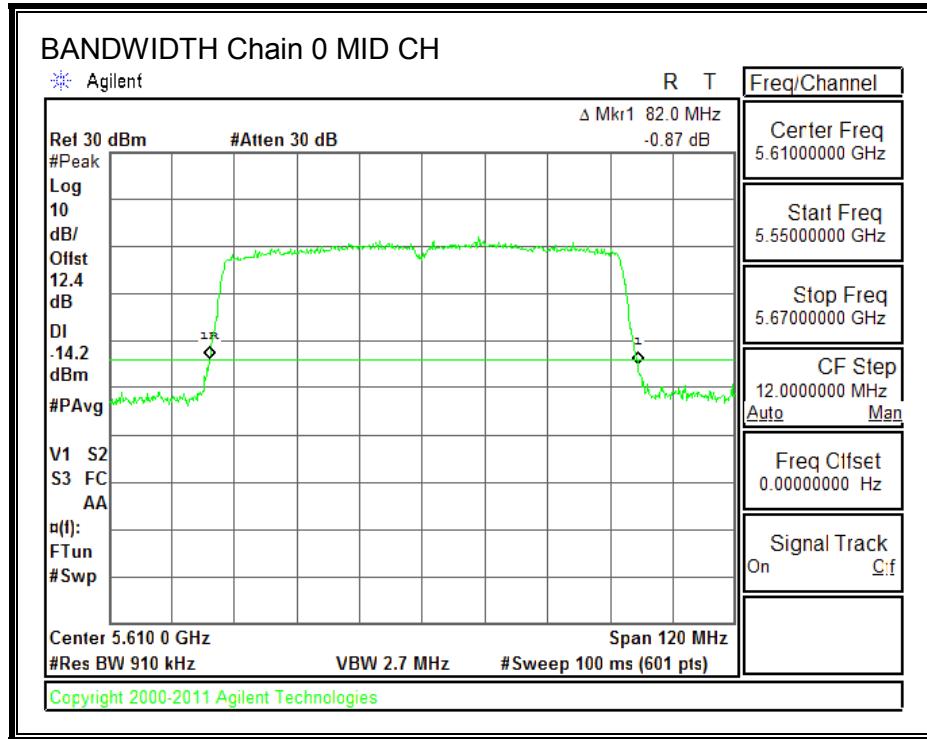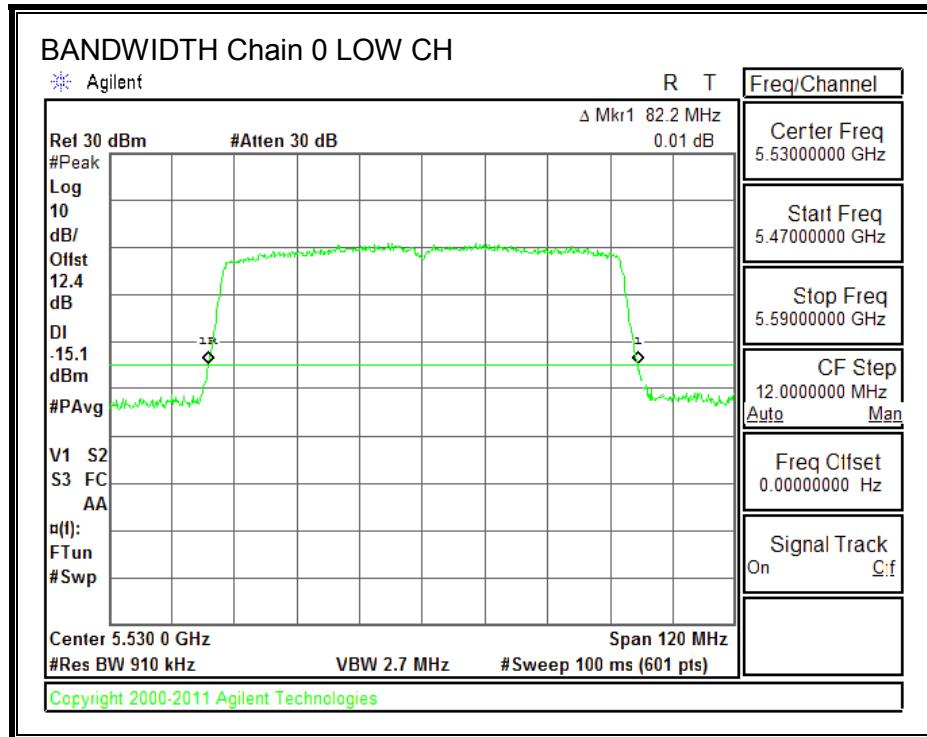

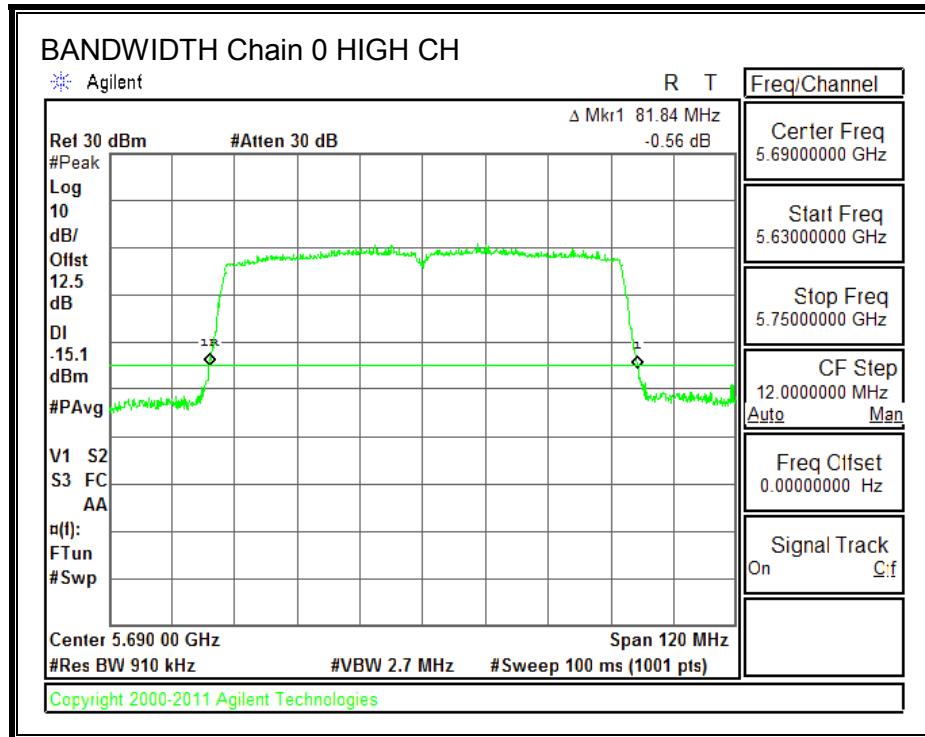

**26 dB BANDWIDTH, Chain 1**

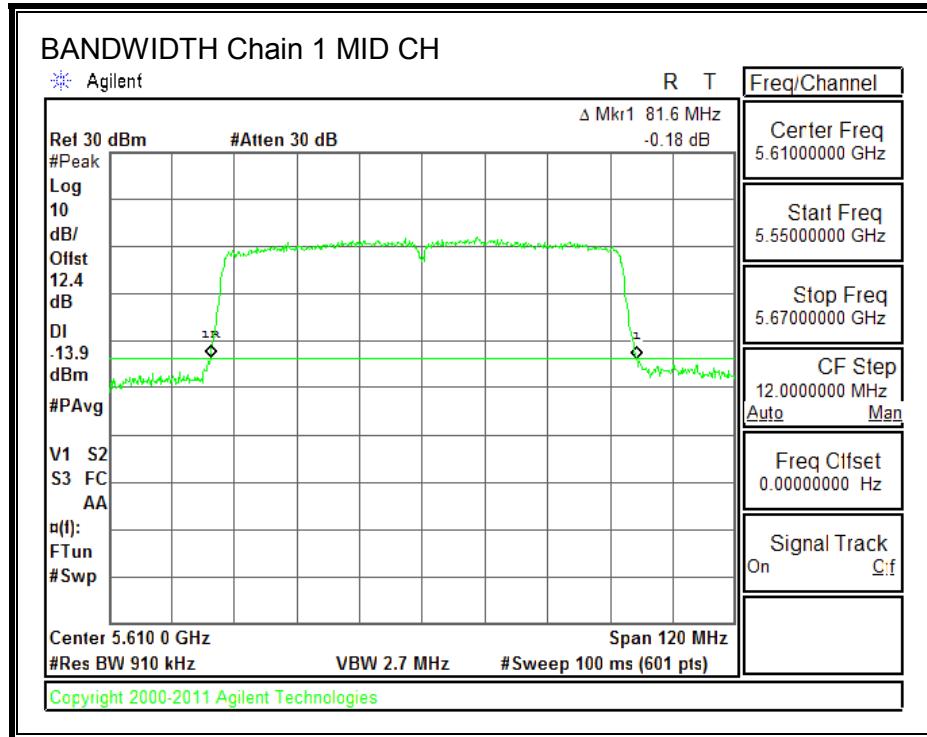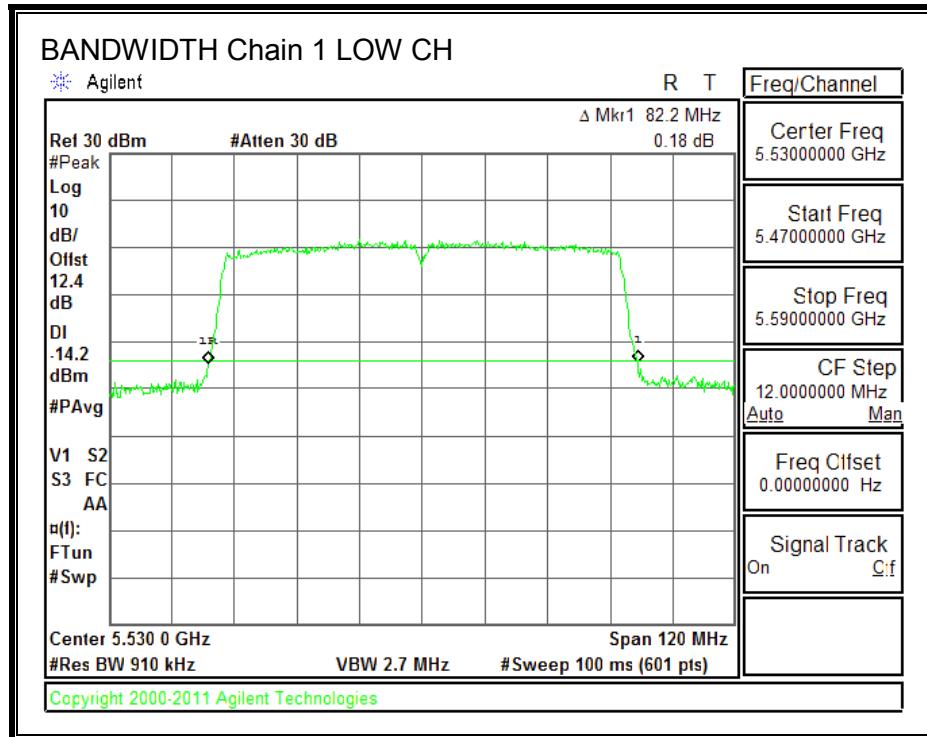

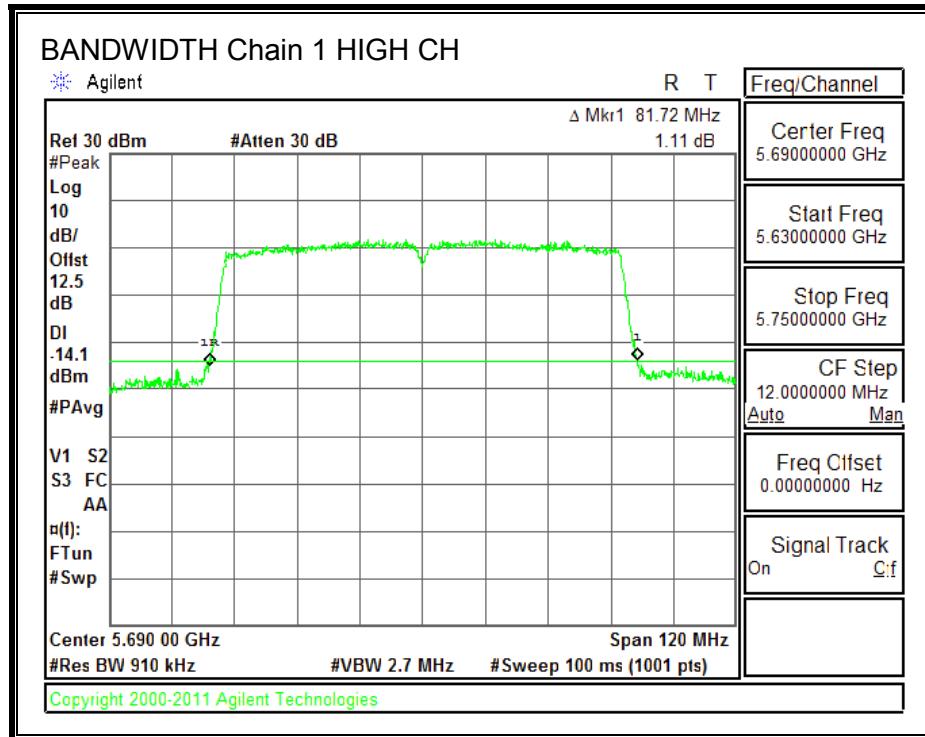

### 9.35.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS



Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5530	75.3283	75.3801
Mid	5610	75.3371	75.3643
High	5690	75.4320	75.4493


**99% BANDWIDTH, Chain 0**

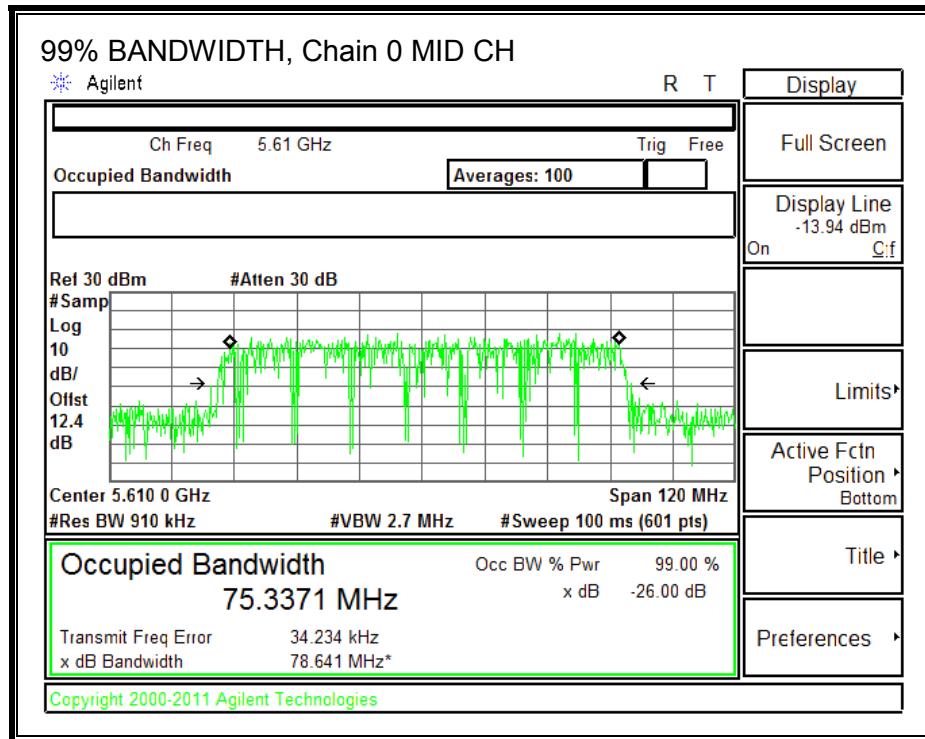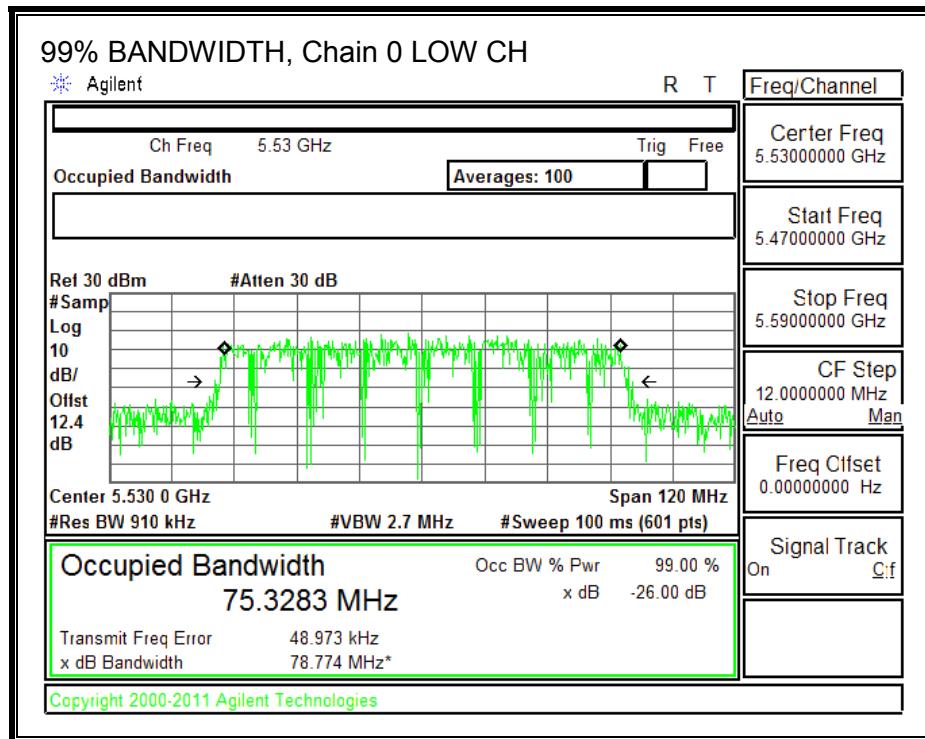

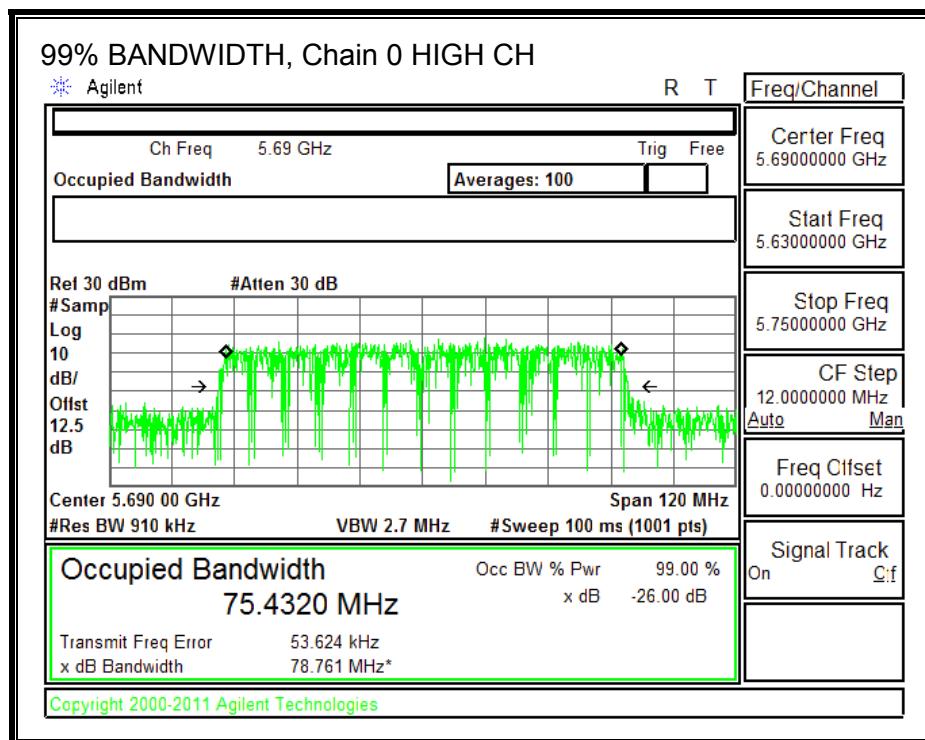

**99% BANDWIDTH, Chain 1**

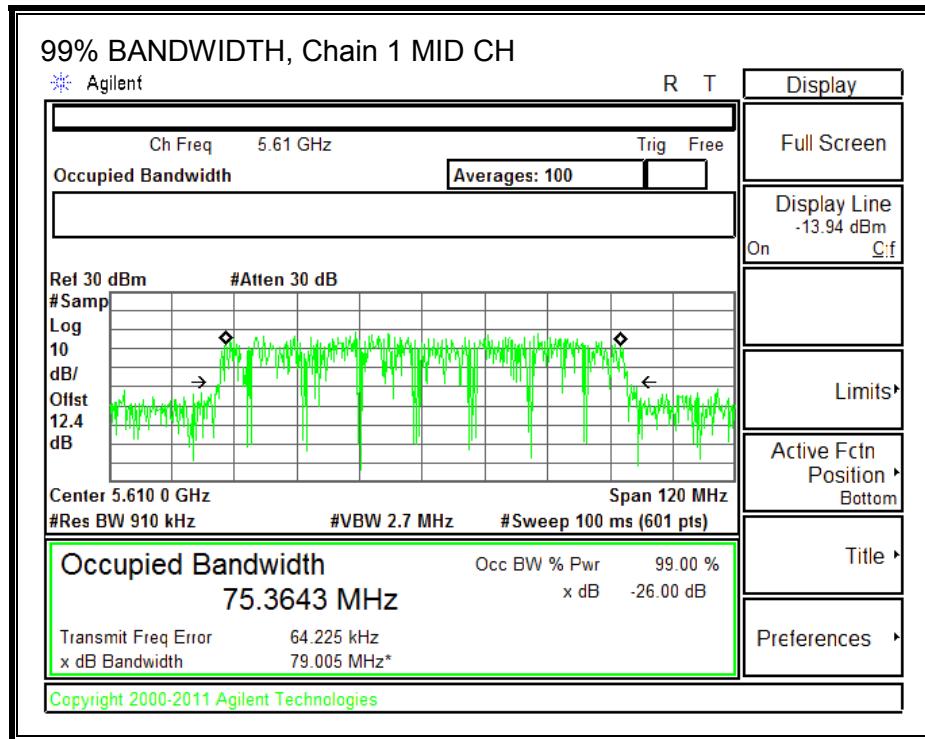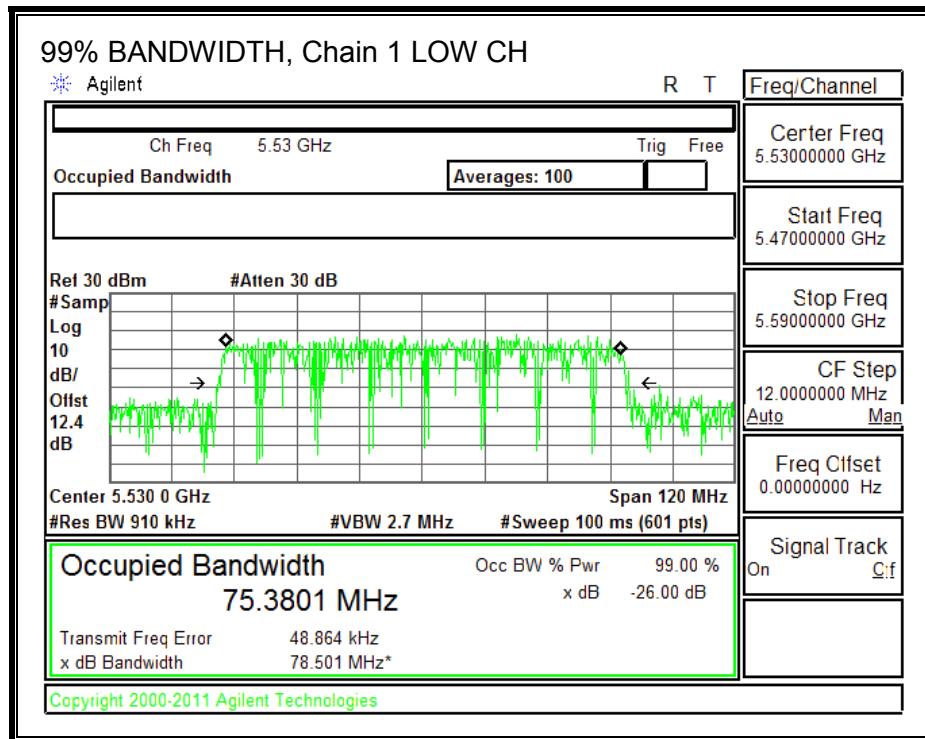

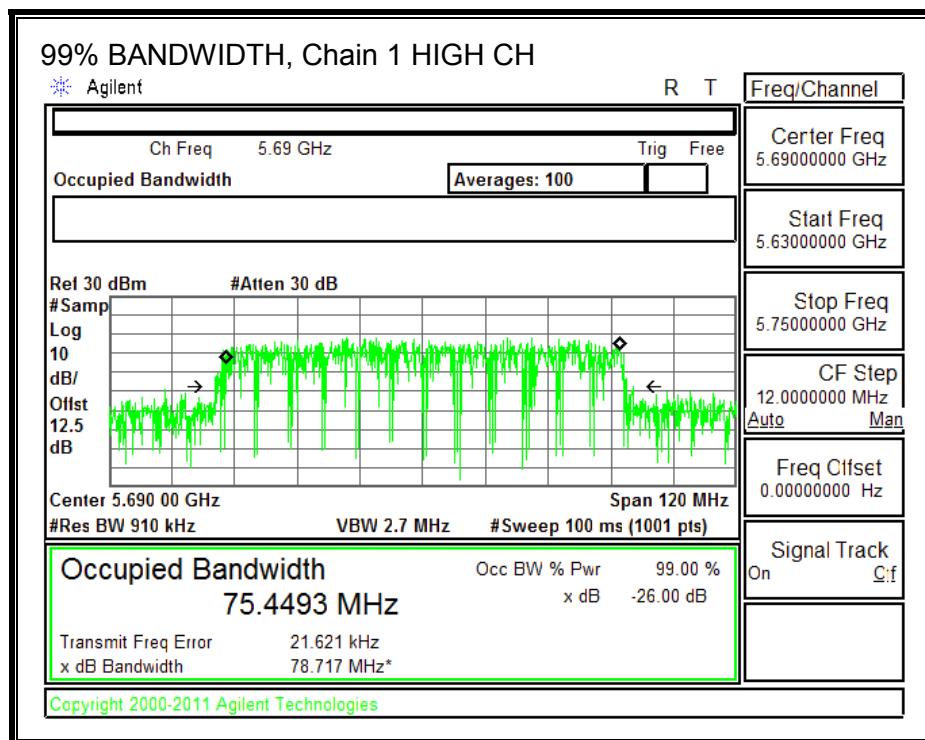

### 9.35.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
5.00	4.57	4.79

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	82.20	4.79	4.79	24.00	11.00
Mid	5610	82.20	4.79	4.79	24.00	11.00
High	5690	81.84	4.79	4.79	24.00	11.00

Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	10.75	10.78	14.00	24.00	-10.00
Mid	5610	17.73	17.72	20.96	24.00	-3.04
High	5690	17.76	17.77	21.00	24.00	-3.00



### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5530	-5.22	-4.63	-1.69	11.00	-12.69
Mid	5610	0.96	0.87	4.14	11.00	-6.86

**OUTPUT POWER AND PSD, Chain 0**

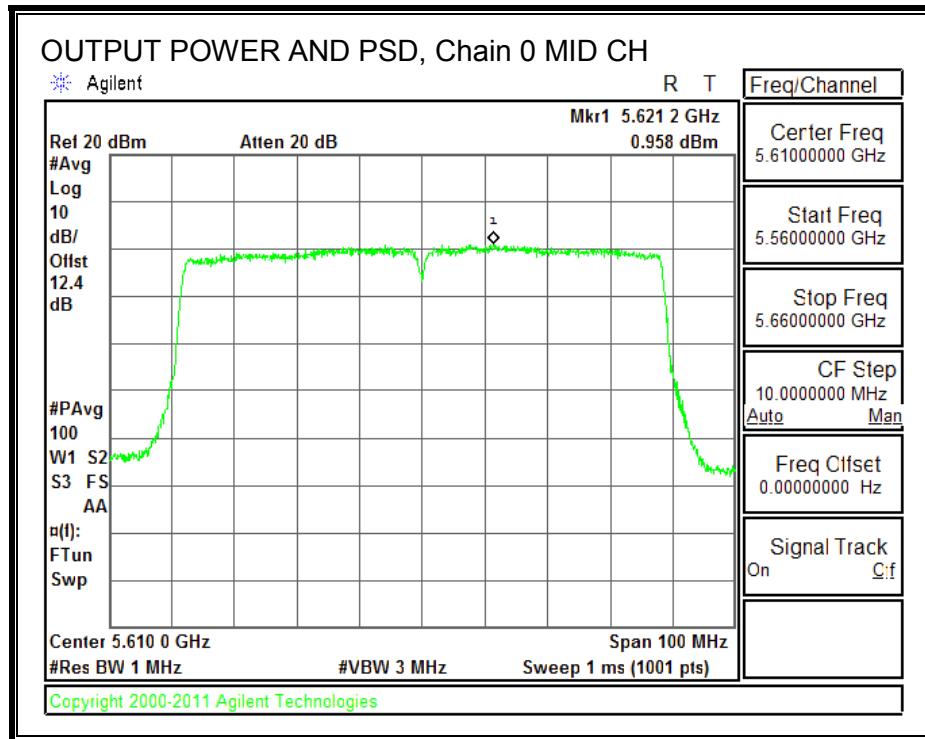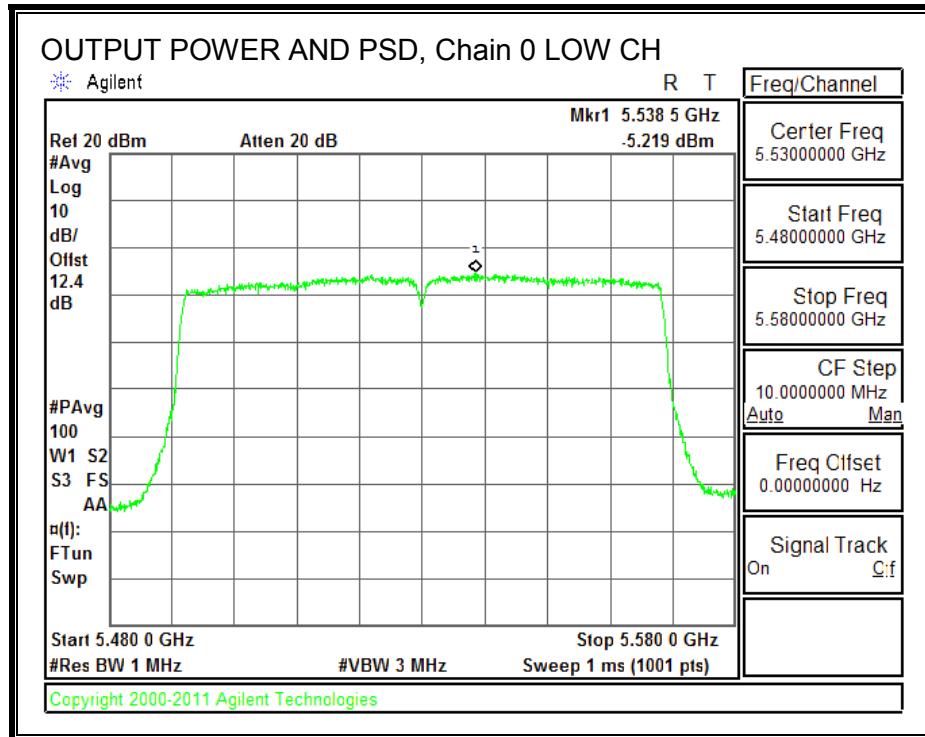

**OUTPUT POWER AND PSD, Chain 1**

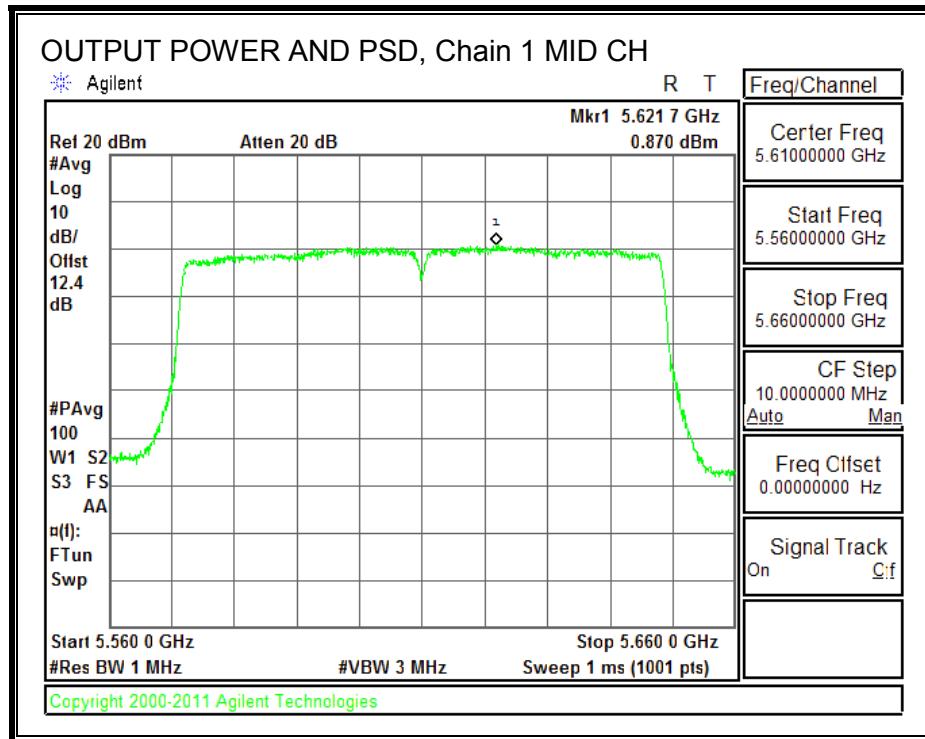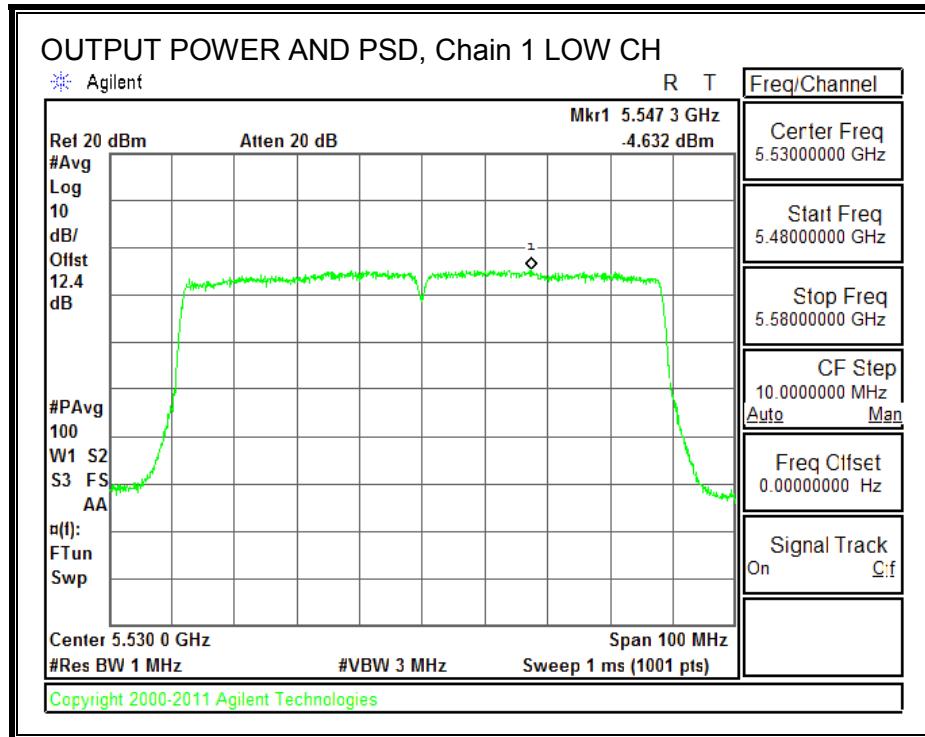

**STRADDLE CHANNEL 138 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	75.86	4.79	4.79	24.00	11.00



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	17.89	17.71	21.03	24.00	-2.97

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	1.19	1.01	4.33	11.00	-6.67

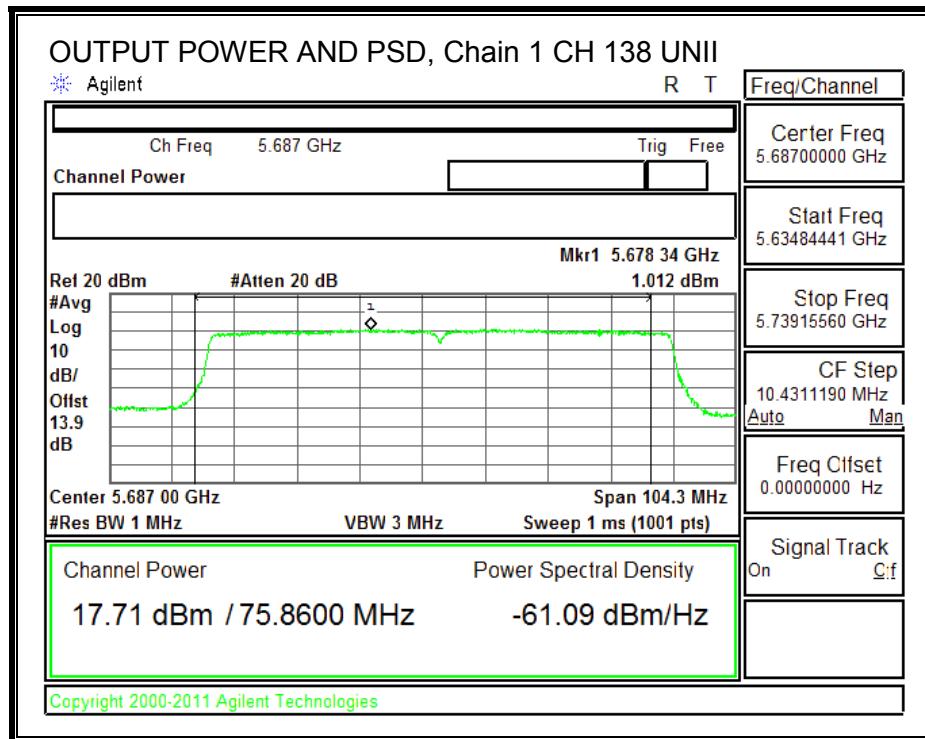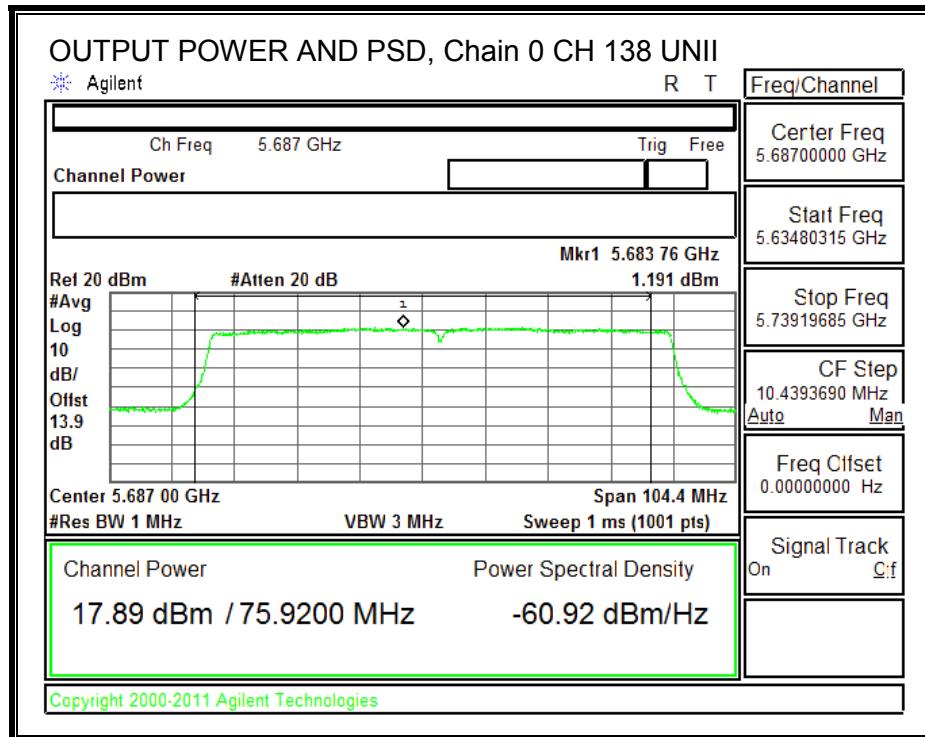

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	4.79	30.00	30.00



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	3.49	3.47	6.71	30.00	-23.29

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-3.05	-3.09	0.16	30.00	-29.84

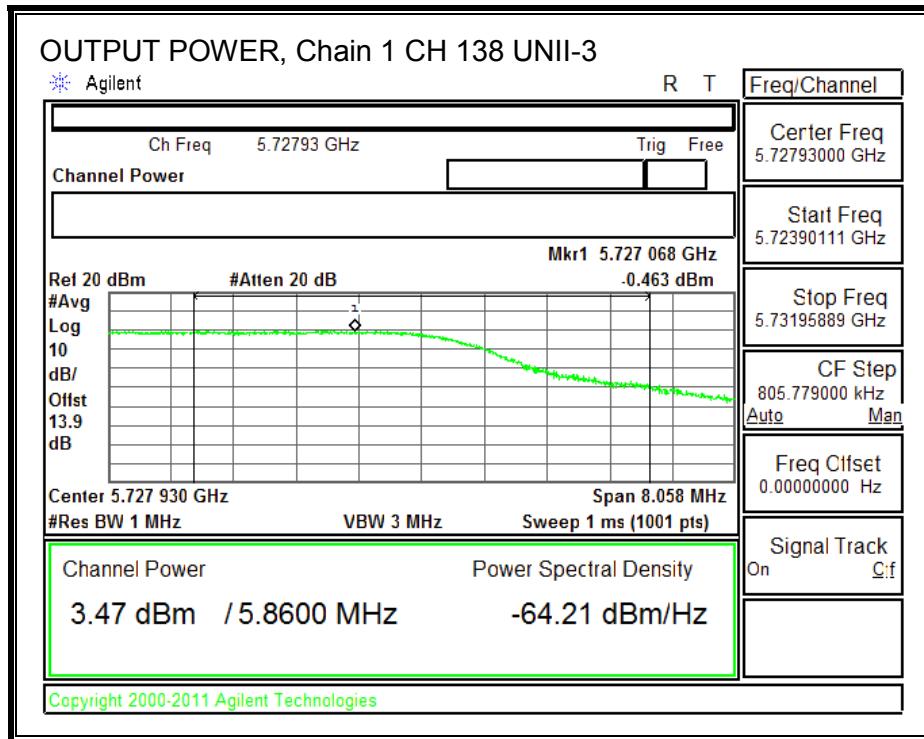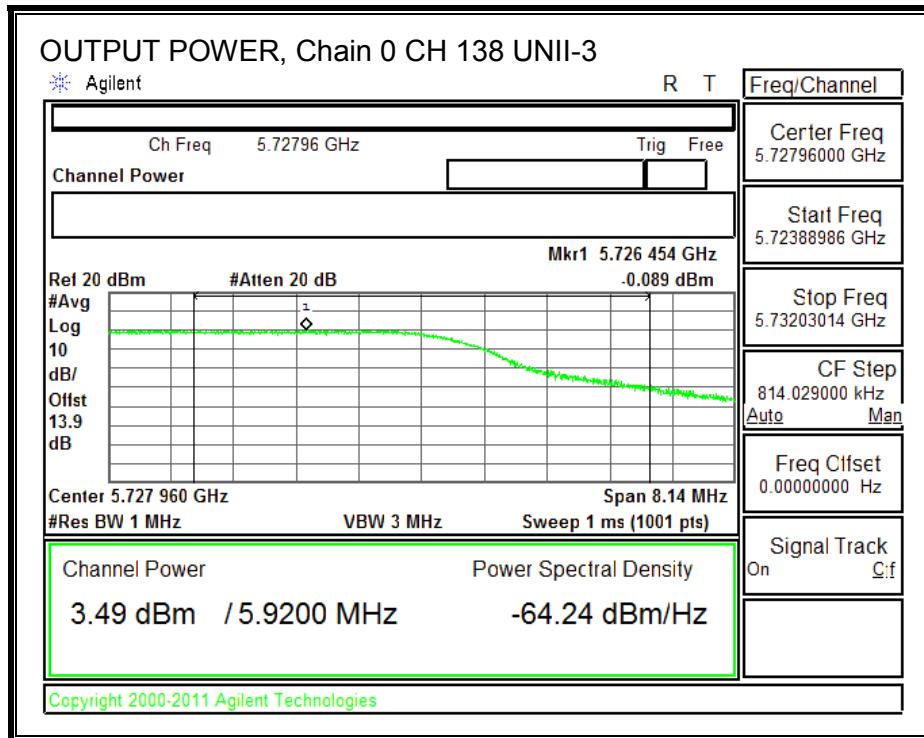

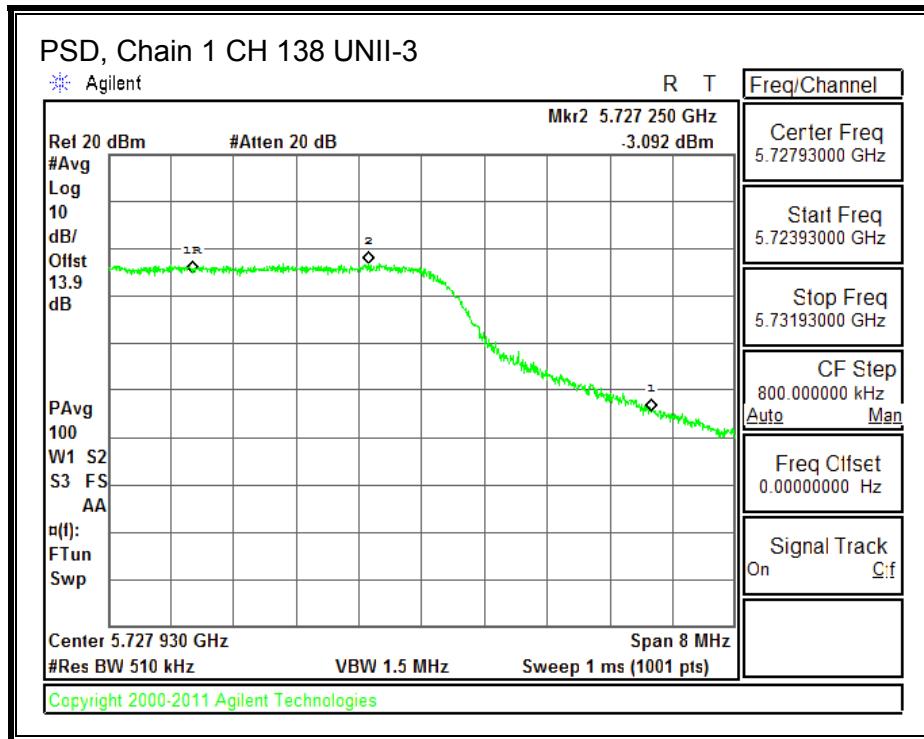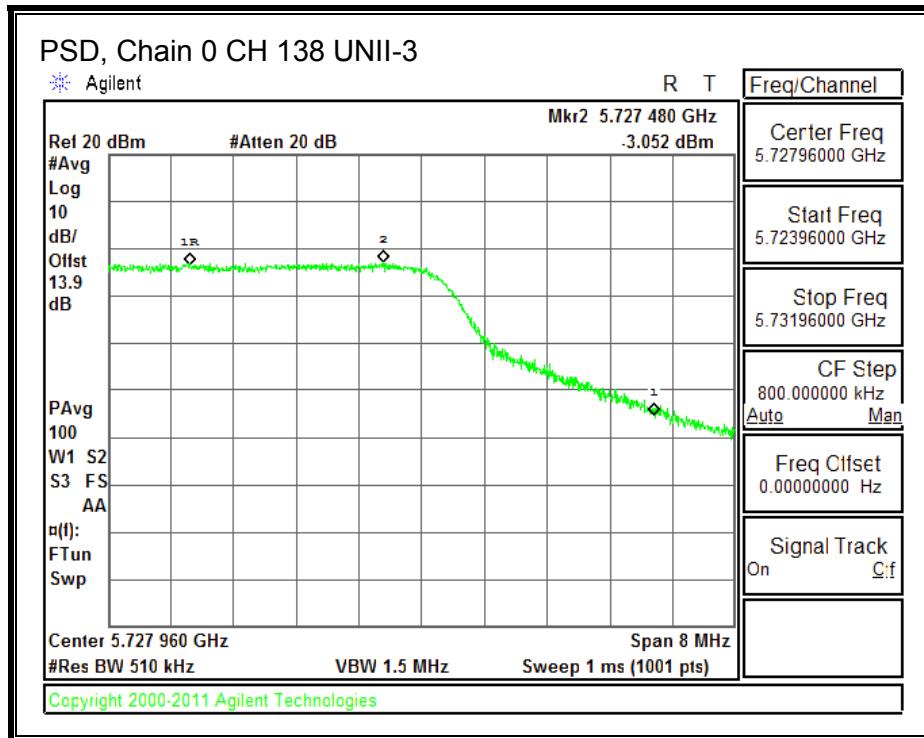

## 9.36. 802.11ac VHT80 2TX BF IN THE 5.6 GHz BAND

### 9.36.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
5.00	4.57	7.80

## RESULTS

### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5610	81.48	7.80	7.80	22.20	9.20

Duty Cycle CF (dB)	0.26	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5610	16.97	17.00	20.26	22.20	-1.94


### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5610	-0.03	-0.34	3.09	9.20	-6.11

## PSD, Chain 0

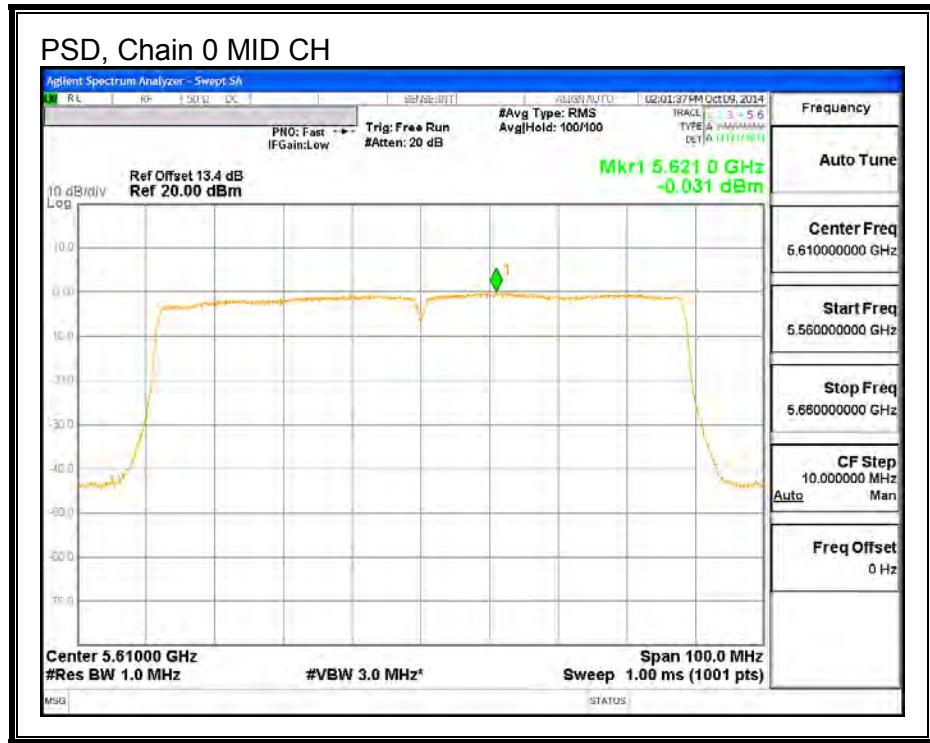

## PSD, Chain 1

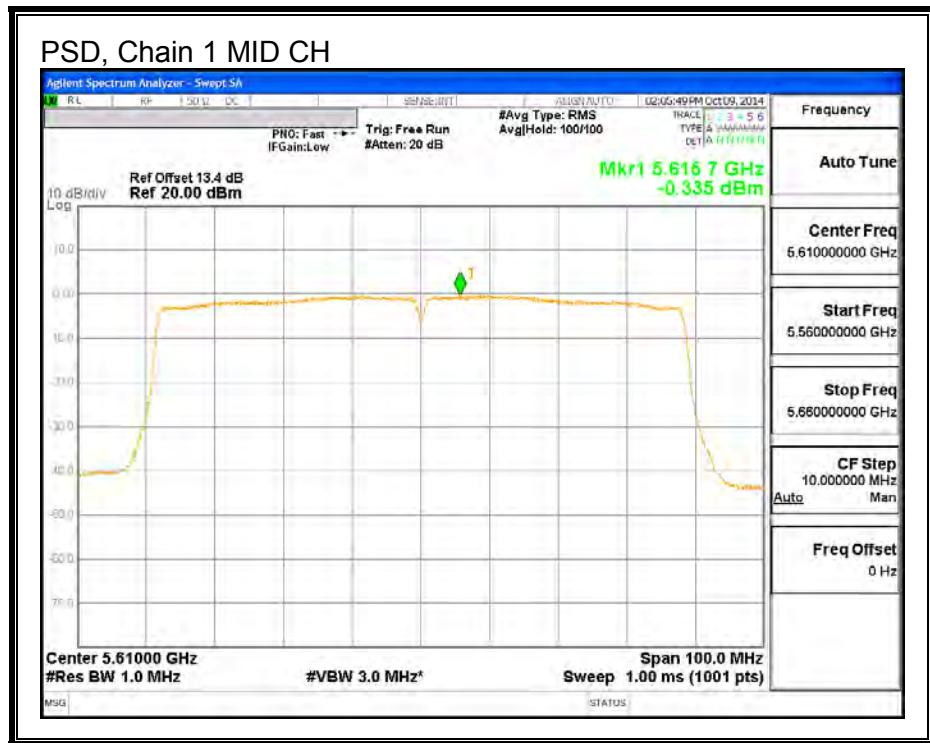

**STRADDLE CHANNEL 138 RESULTS**

**UNII-2C BAND**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	75.74	7.80	7.80	22.20	9.20



Duty Cycle CF (dB)	0.26	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	16.86	16.87	20.14	22.20	-2.06

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-0.08	-0.32	3.07	9.20	-6.13

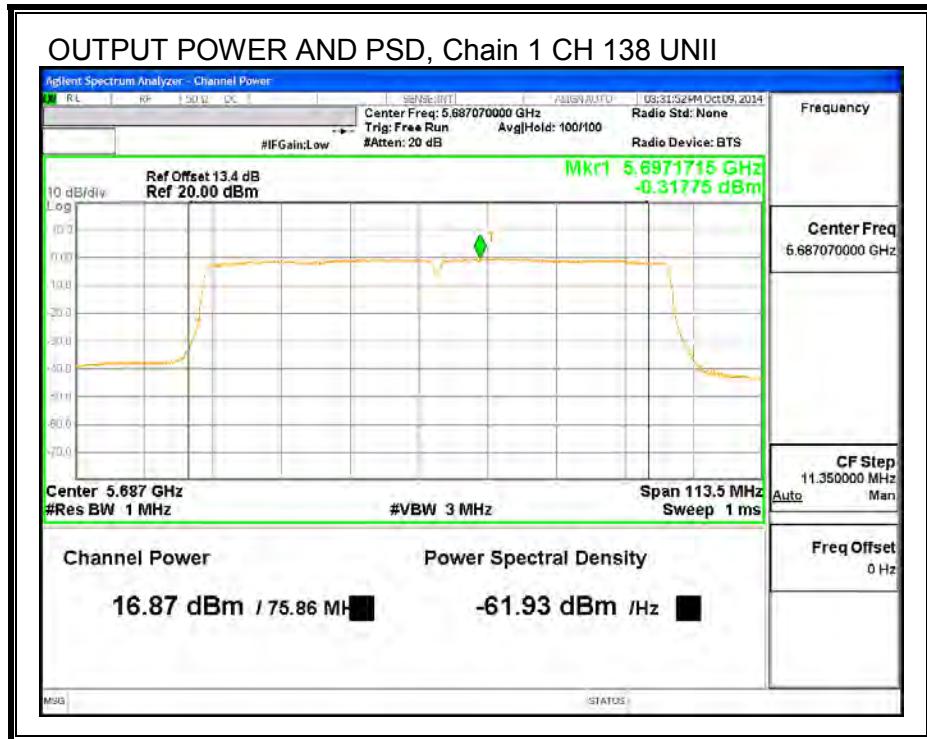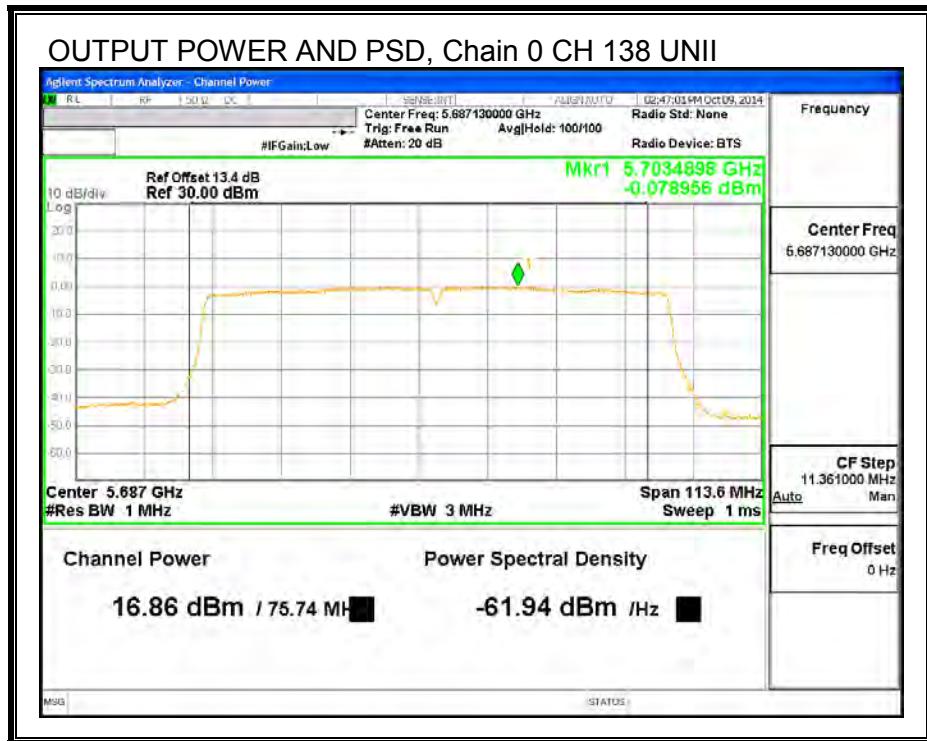

**UNII-3 BAND**

**Antenna Gain and Limit**

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	7.80	28.20	28.20



Duty Cycle CF (dB)	0.26	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	2.22	2.41	5.59	28.20	-22.61

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-5.28	-5.04	-1.88	28.20	-30.08

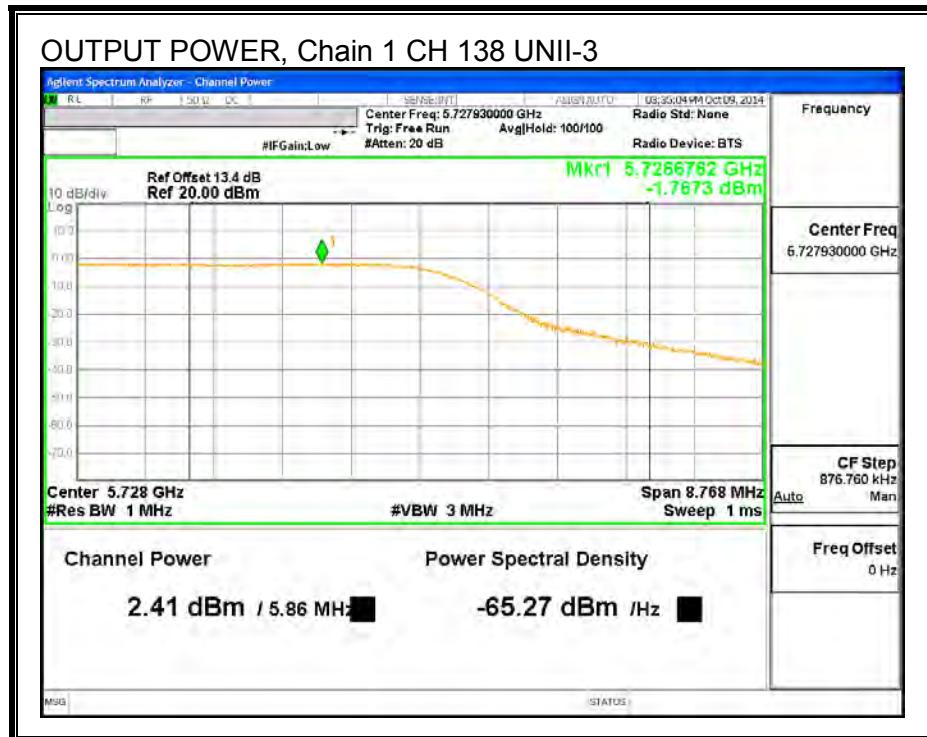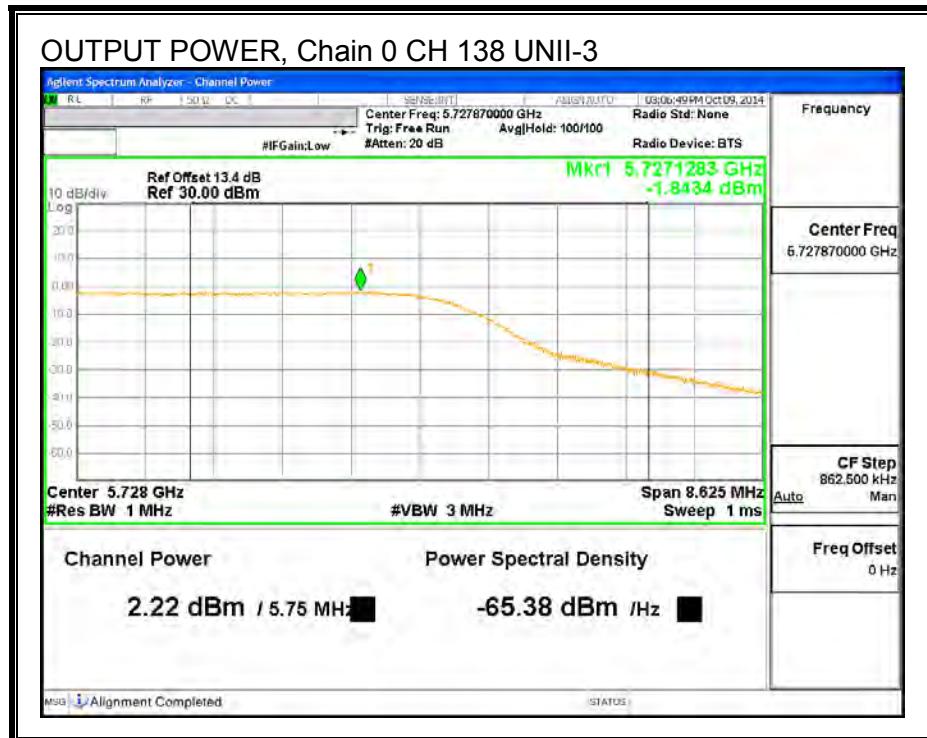

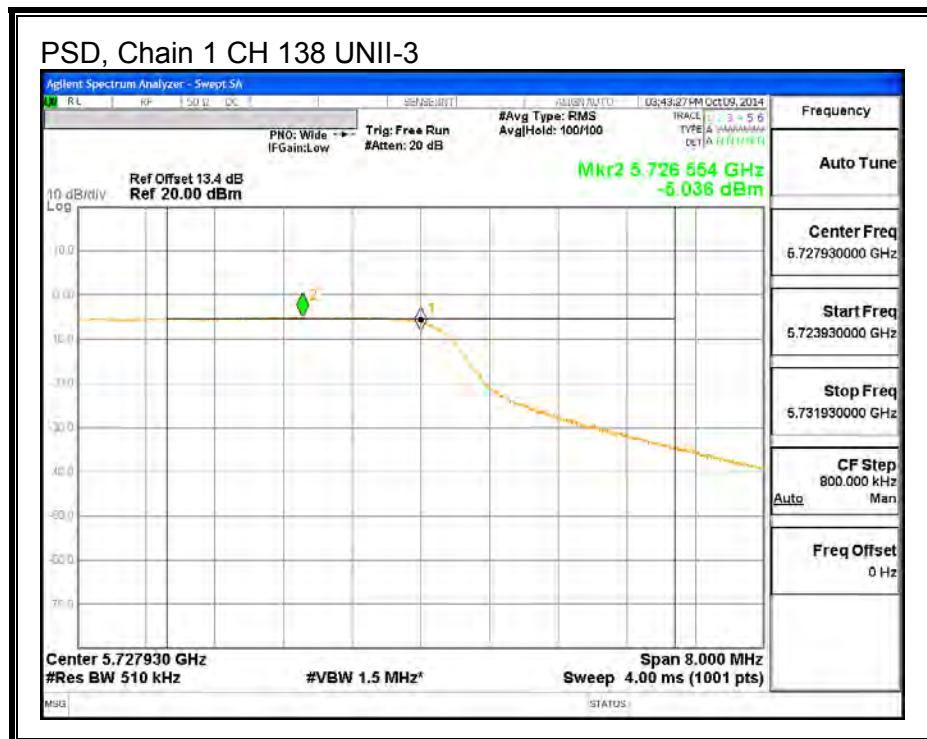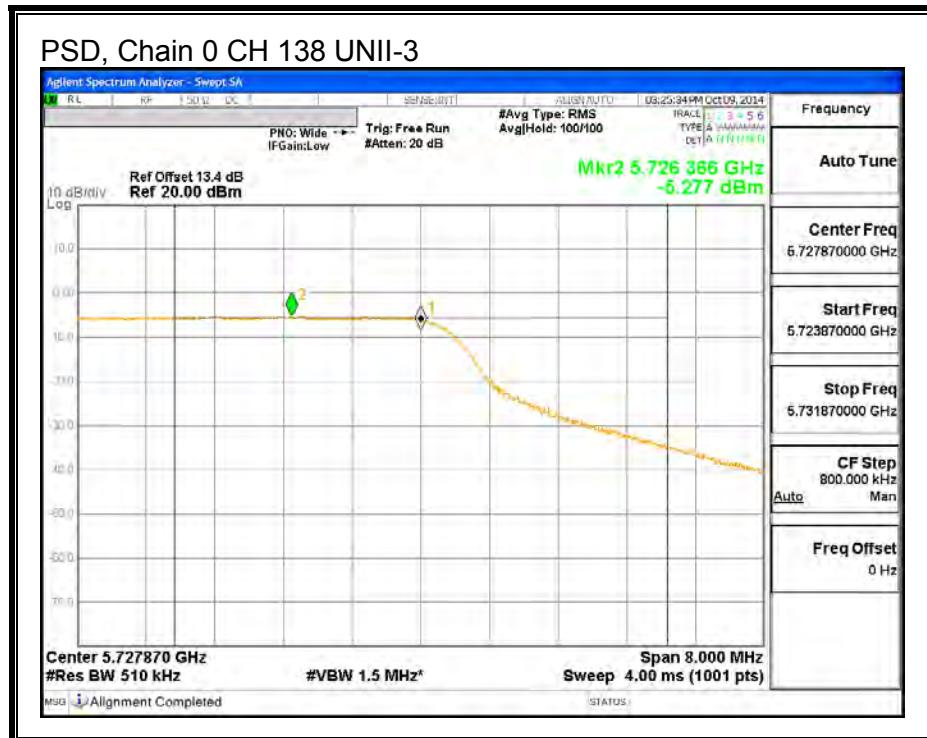

## 9.37. 802.11a 1TX MODE IN THE 5.8 GHz BAND

### 9.37.1. 6 dB BANDWIDTH

#### LIMITS



FCC §15.407 (e)


The minimum 6 dB bandwidth shall be at least 500 kHz.

#### RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	16.400	0.5
Mid	5785	16.450	0.5
High	5825	16.375	0.5

**6 dB BANDWIDTH**

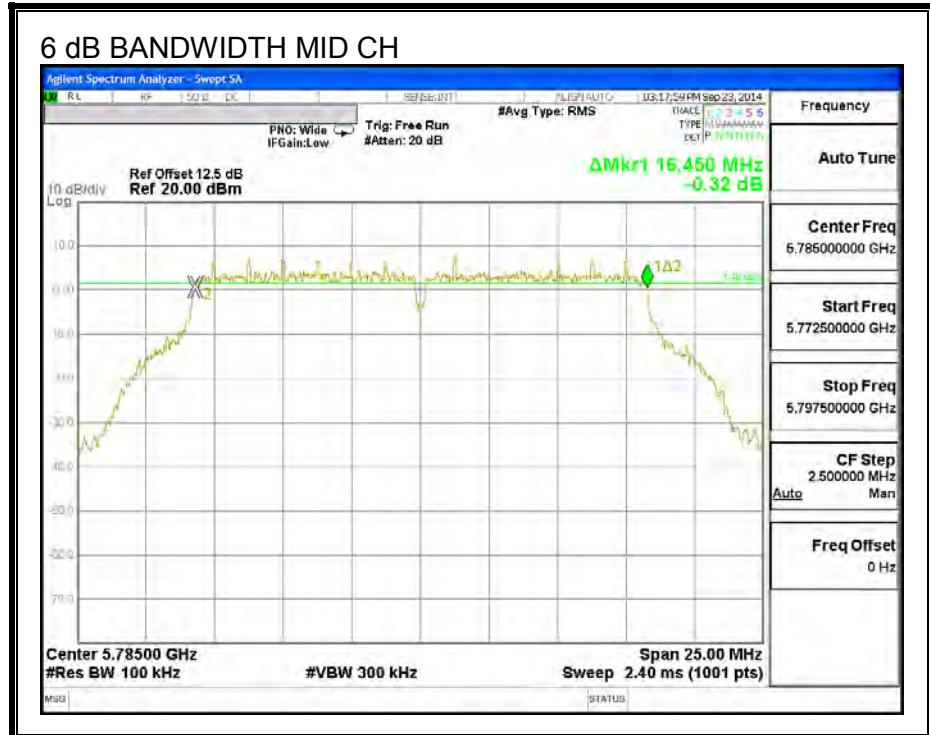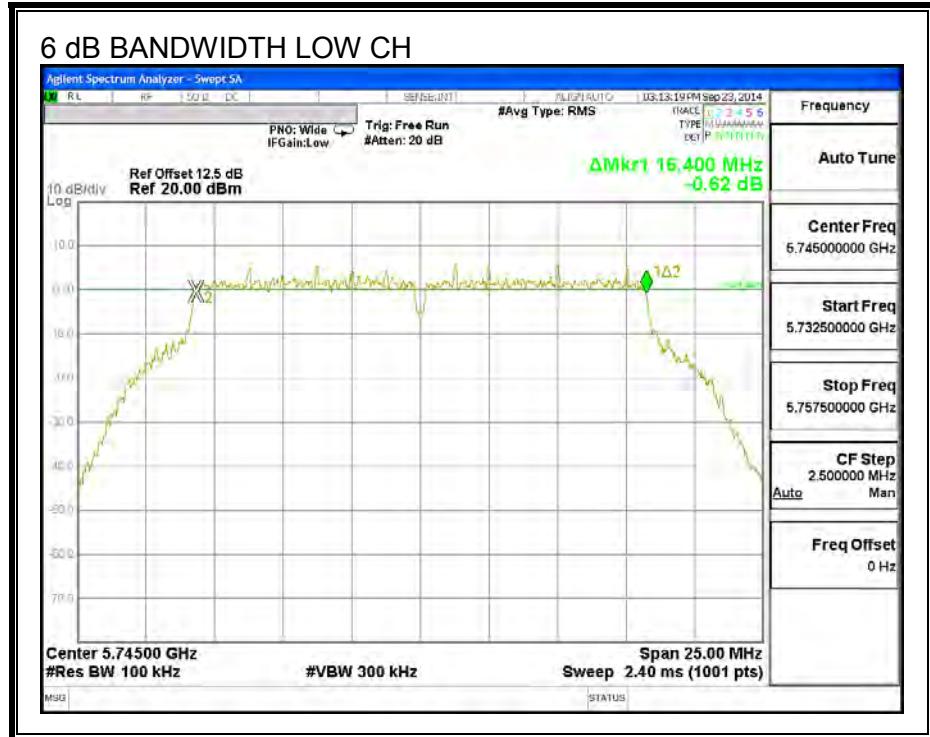

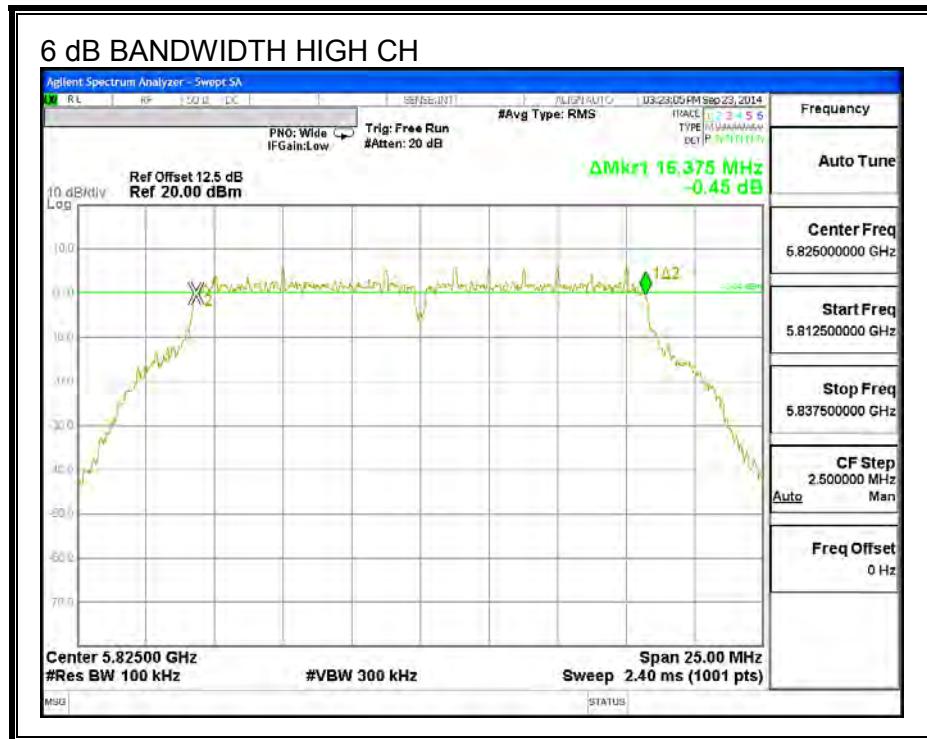

### 9.37.2. 26 dB BANDWIDTH



#### LIMITS


None, for reporting purposes only

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5745	21.7500
Mid	5785	21.7000
High	5825	21.7000

## **26 dB BANDWIDTH**

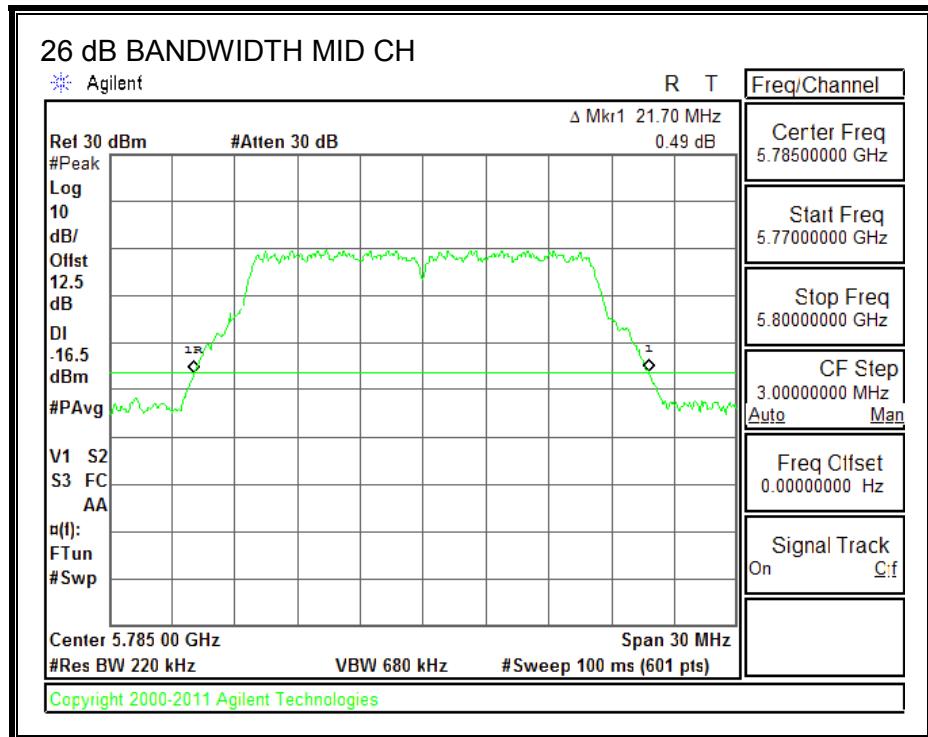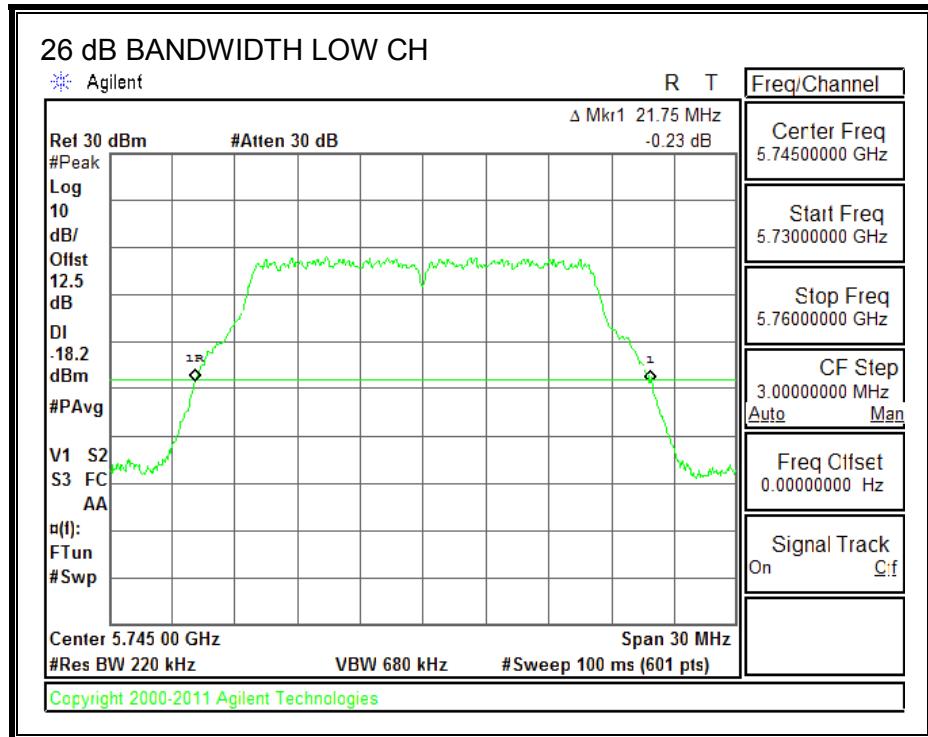

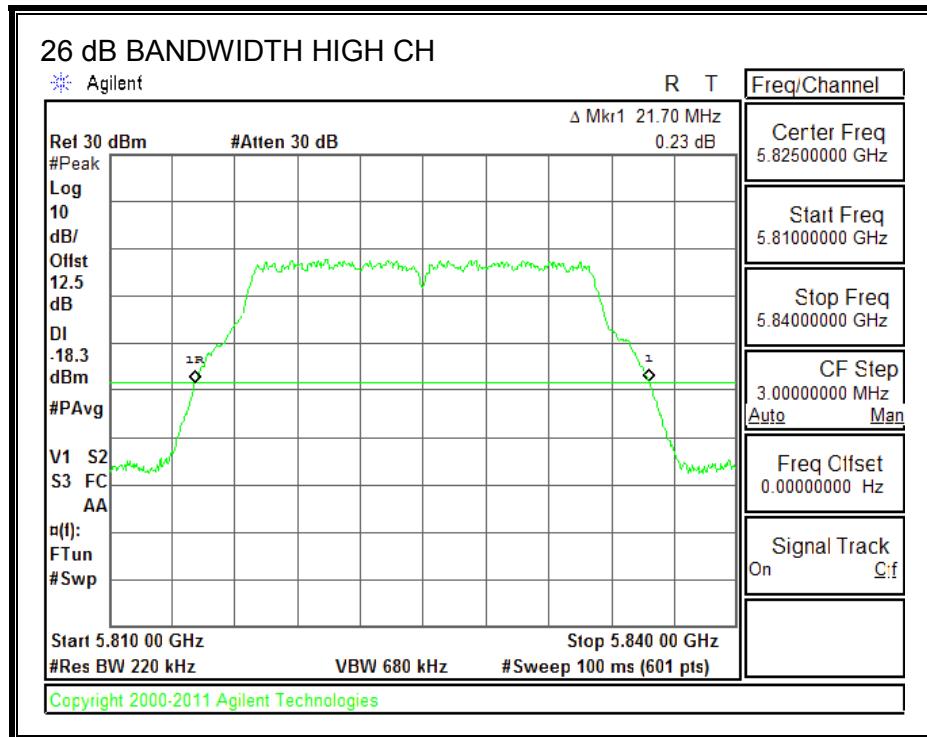

### 9.37.3. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	16.4997
Mid	5785	16.5123
High	5825	16.5096

**99% BANDWIDTH**

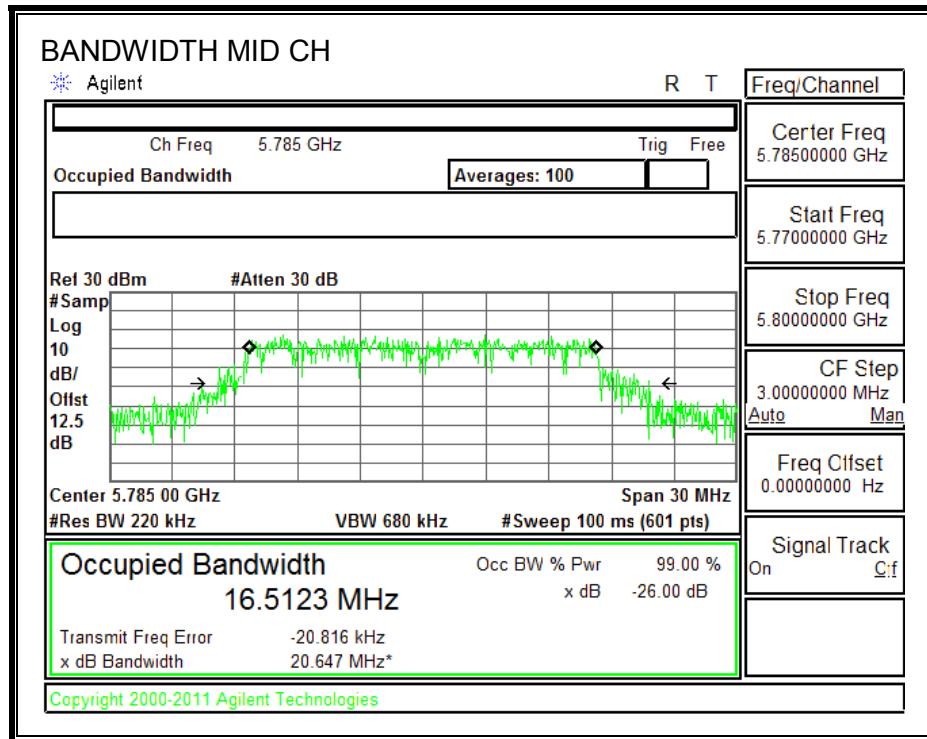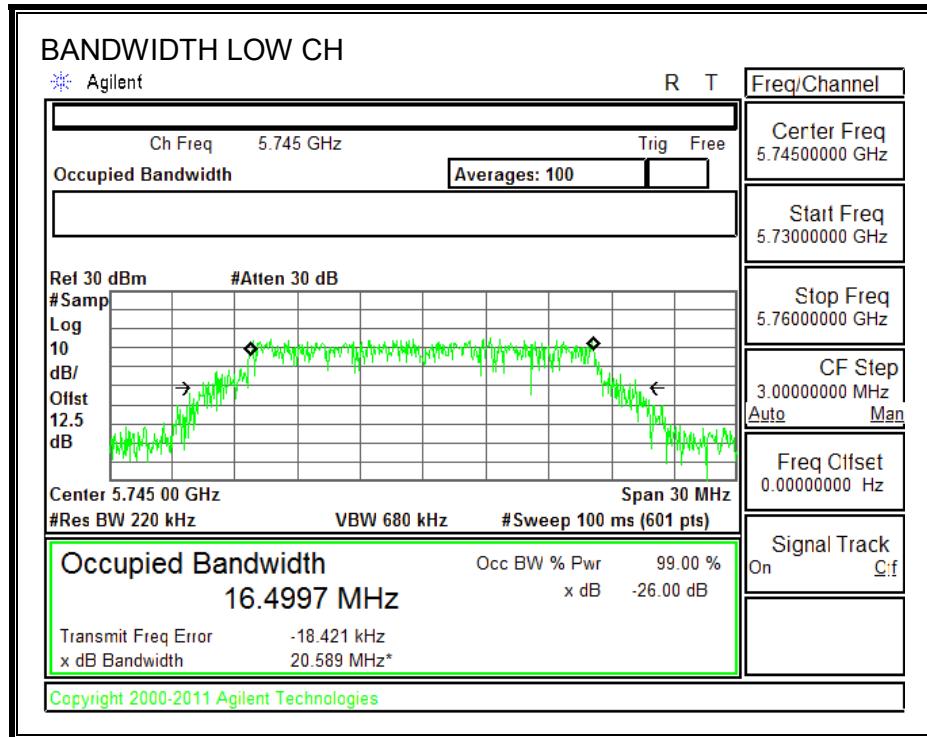

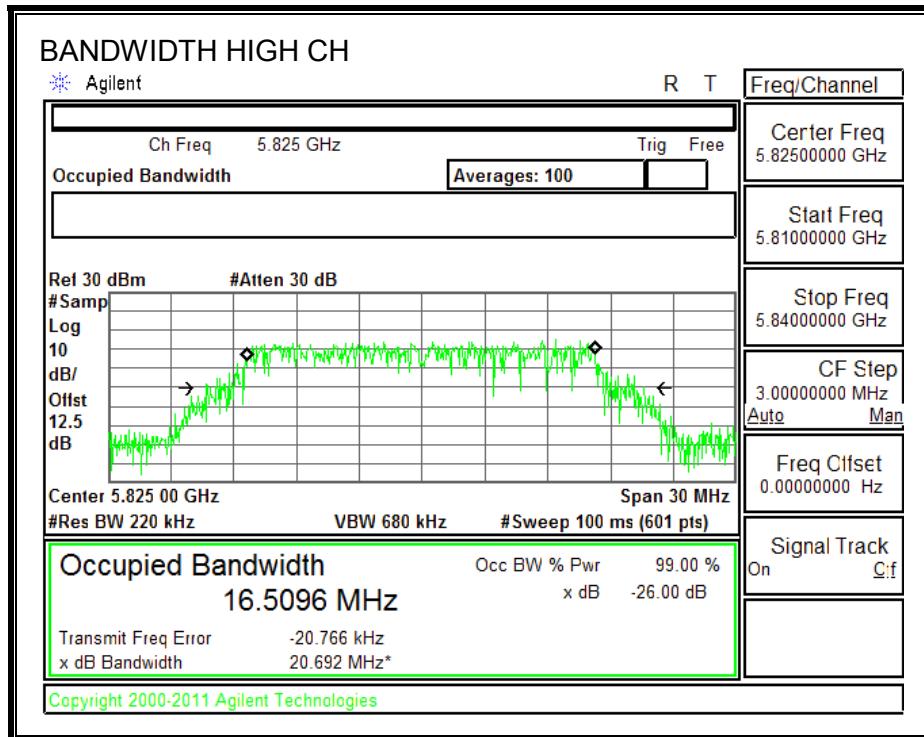

#### 9.37.4. OUTPUT POWER

##### LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

##### ANTENNA 0

Antenna	Gain	(dBi)
		4.78

##### ANTENNA 1

Antenna	Gain	(dBi)
		5.26

## RESULTS

### Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5745	5.26	30.00
Mid	5785	5.26	30.00
High	5825	5.26	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

### Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	17.98	17.98	30.00	-12.02
Mid	5785	18.00	18.00	30.00	-12.00
High	5825	17.89	17.89	30.00	-12.11

### 9.37.5. MAXIMUM POWER SPECTRAL DENSITY (PSD)

#### LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### ANTENNA 0

Antenna Gain (dBi)
4.78

#### ANTENNA 1

Antenna Gain (dBi)
5.26

## RESULTS

### Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5745	5.26	30.00
Mid	5785	5.26	30.00
High	5825	5.26	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

### PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5745	4.51	4.51	30.00	-25.49
Mid	5785	4.10	4.10	30.00	-25.90
High	5825	4.21	4.21	30.00	-25.79

**PSD, Chain 1**

