

8.41.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	5260	16.96	16.86	19.92
Mid	5300	16.93	16.99	19.97
High	5320	14.45	14.50	17.49

8.41.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna B	Antenna A	Uncorrelated Chains Directional Gain (dBi)
Gain (dBi)	Gain (dBi)	Gain (dBi)
3.02	2.23	2.64

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.78	17.888	2.64	2.64	23.53	11.00
Mid	5300	21.81	17.905	2.64	2.64	23.53	11.00
High	5320	21.81	17.808	2.64	2.64	23.51	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.96	16.86	19.92	23.53	-3.61
Mid	5300	16.93	16.99	19.97	23.53	-3.56
High	5320	14.45	14.50	17.49	23.51	-6.02

PSD Results


Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	4.38	4.55	7.48	11.00	-3.52
Mid	5300	4.21	4.63	7.44	11.00	-3.56
High	5320	2.98	2.97	5.99	11.00	-5.01



PSD, ANTENNA - B

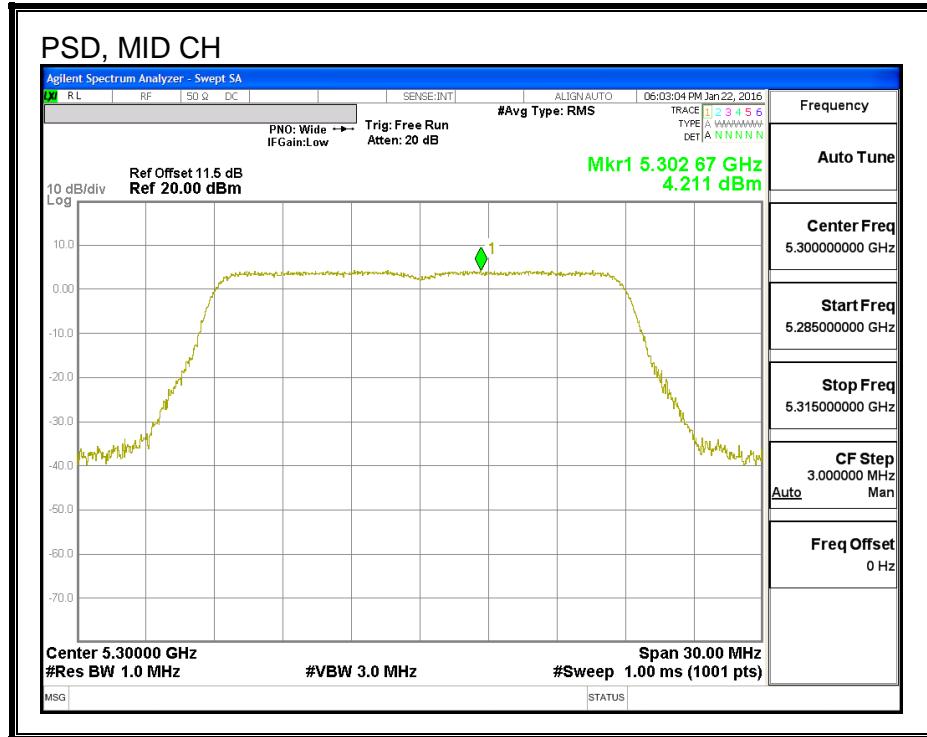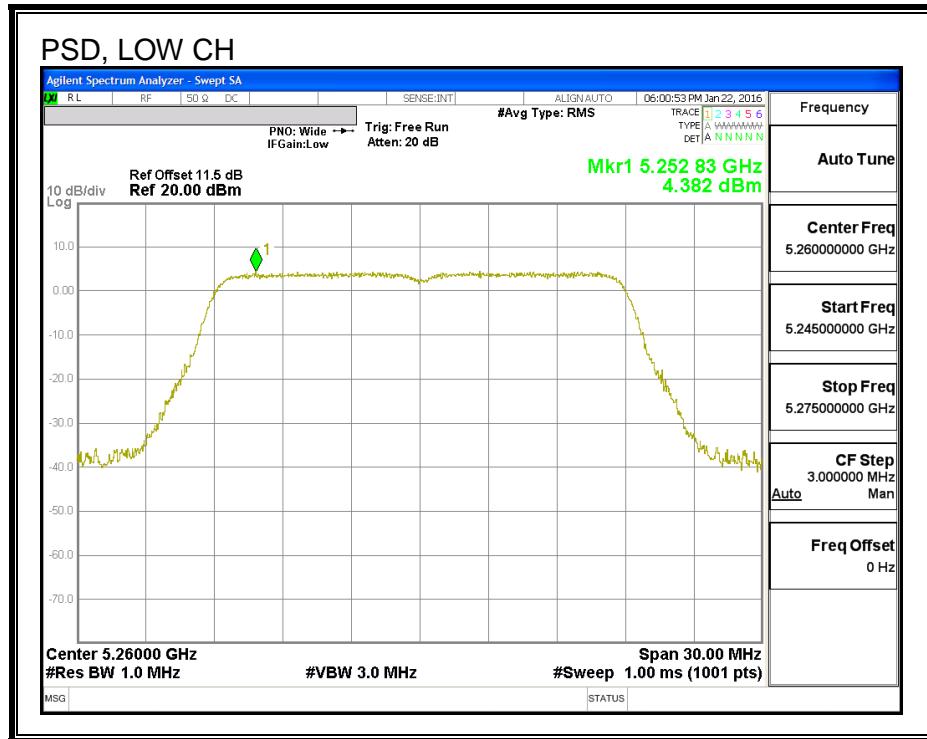

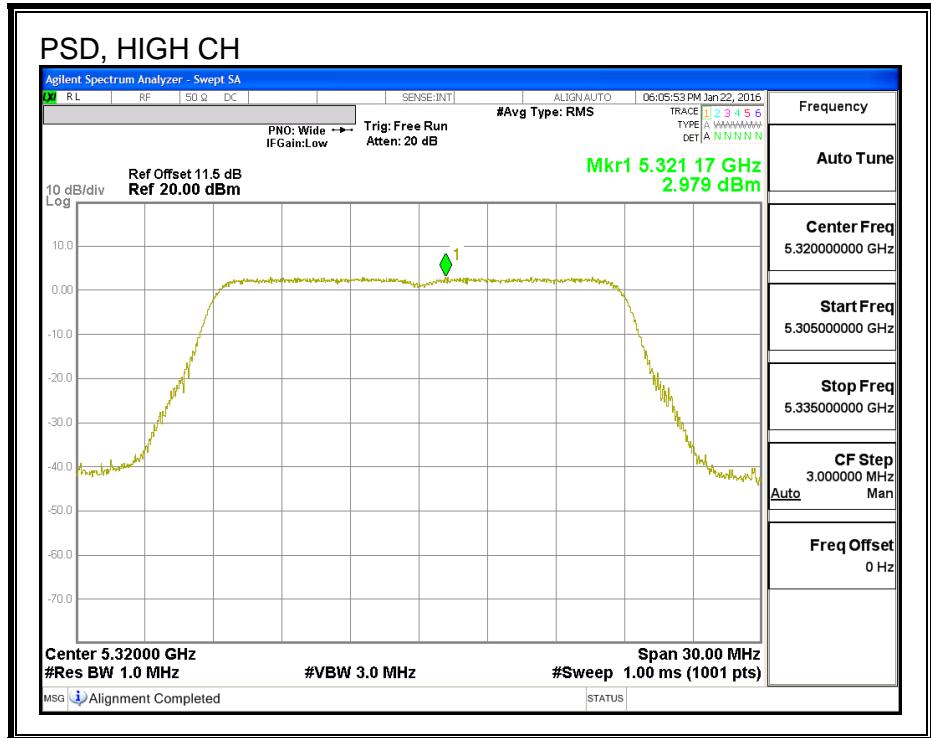

PSD, ANTENNA - A

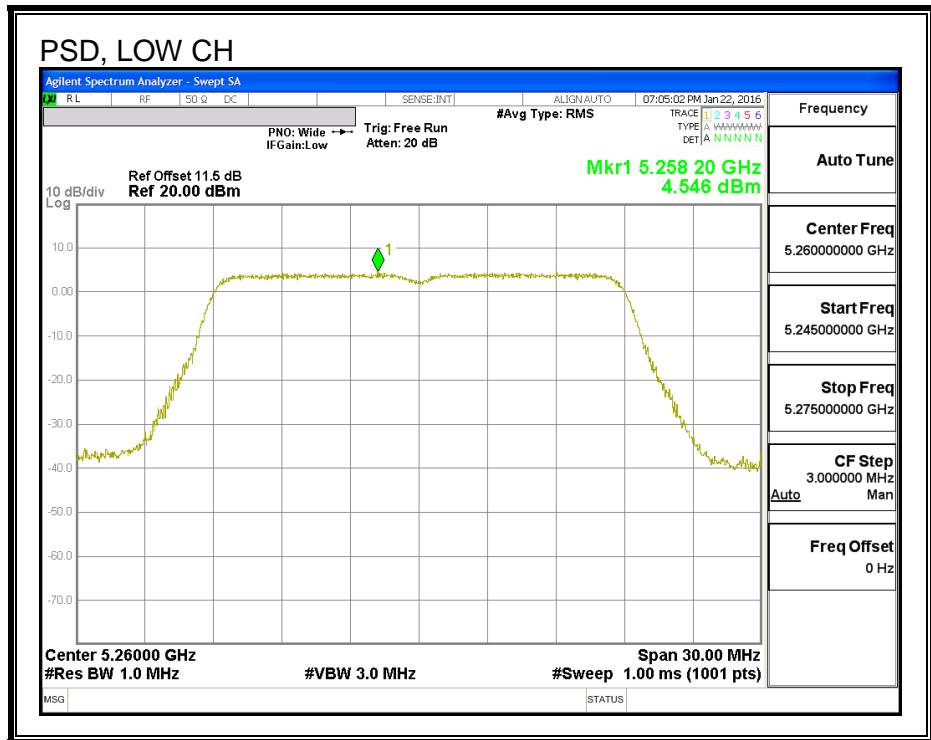

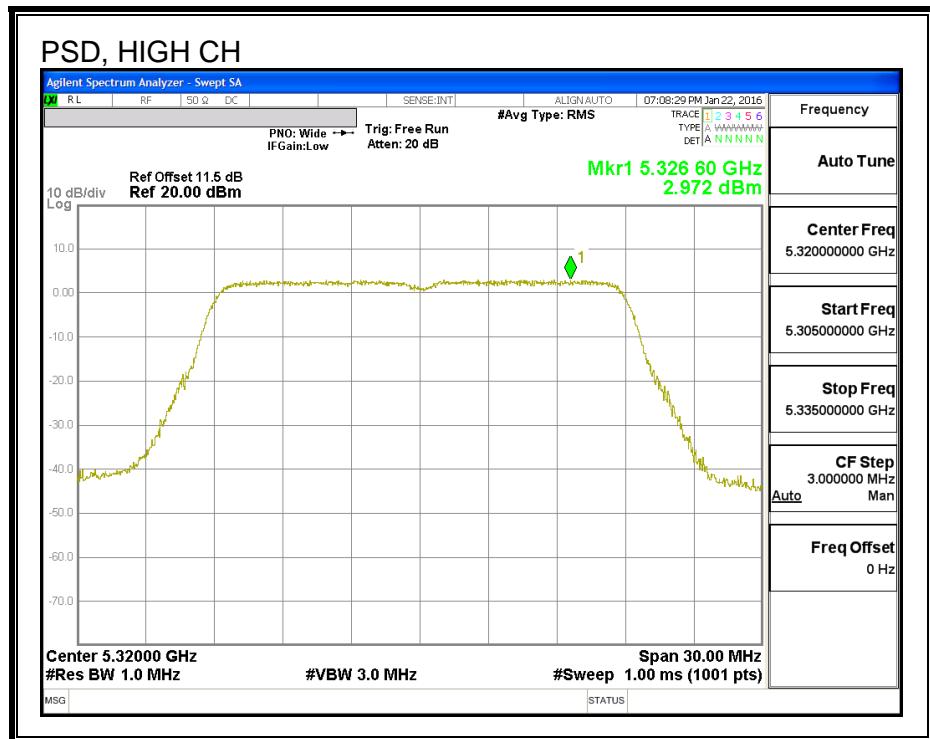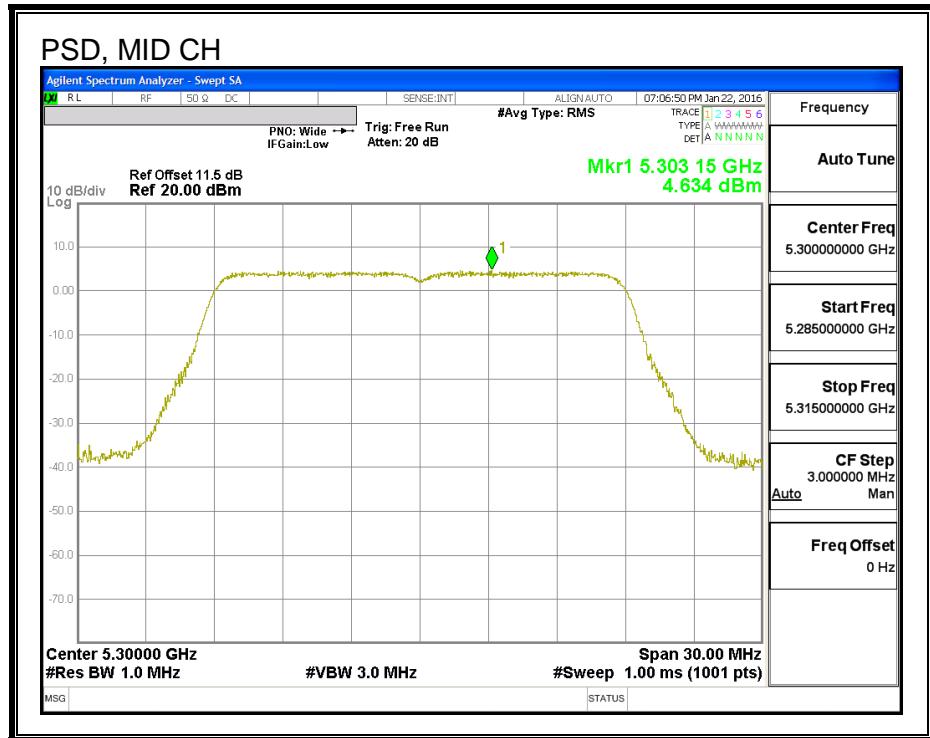

8.42. 802.11n HT20 ANTENNA A+C STBC MODE IN THE 5.3 GHz BAND

8.42.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna C (MHz)
Low	5260	22.11	21.81
Mid	5300	22.03	21.71
High	5320	22.10	21.68



26 DB BANDWIDTH, ANTENNA - A

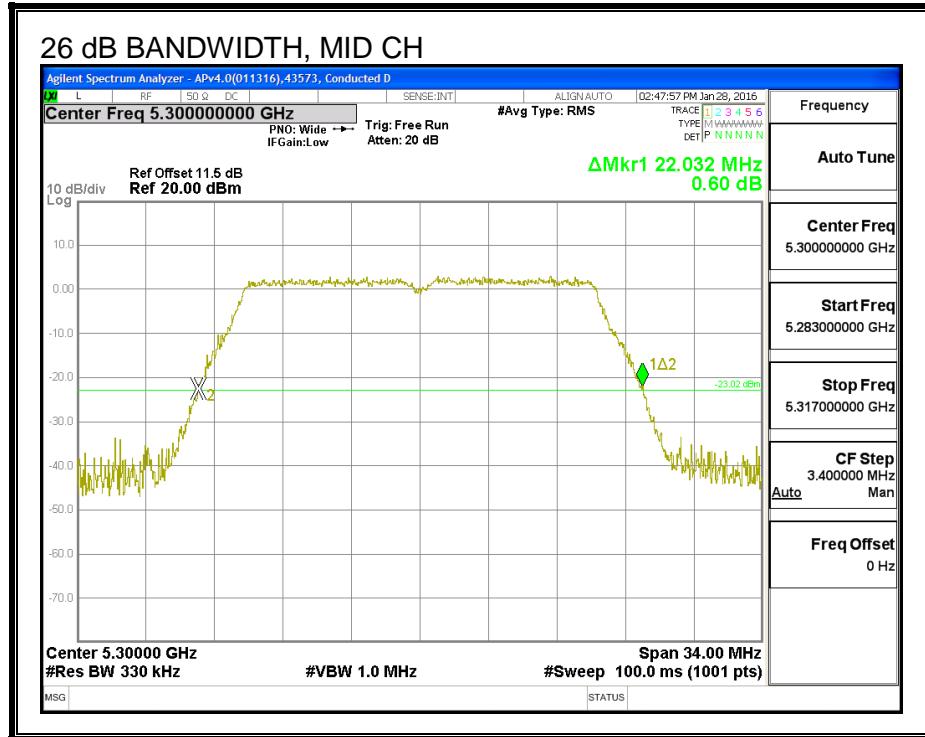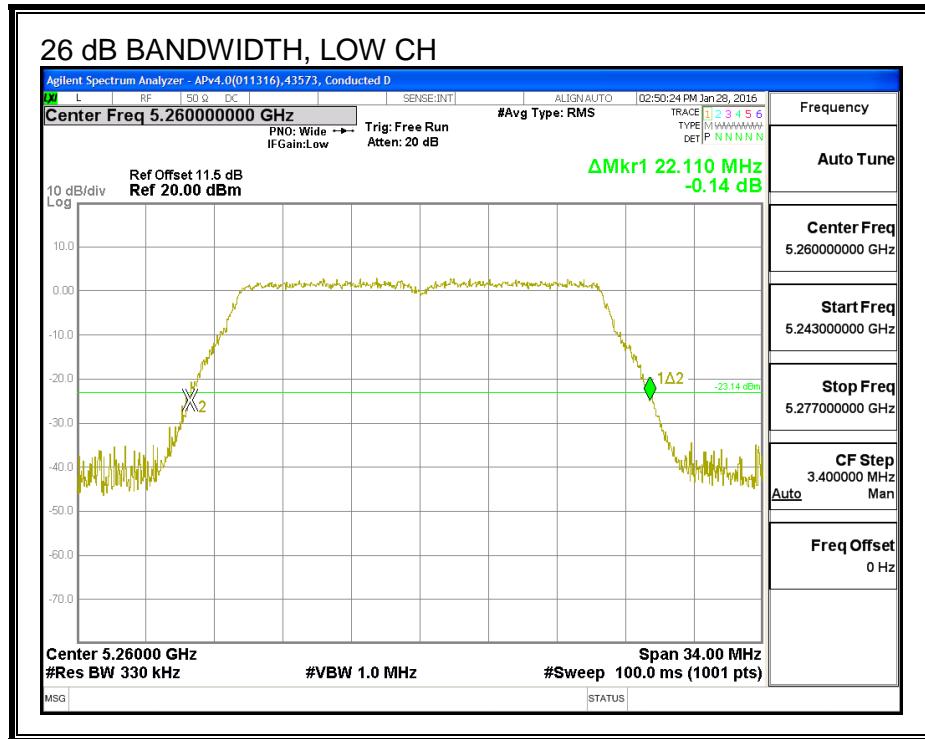

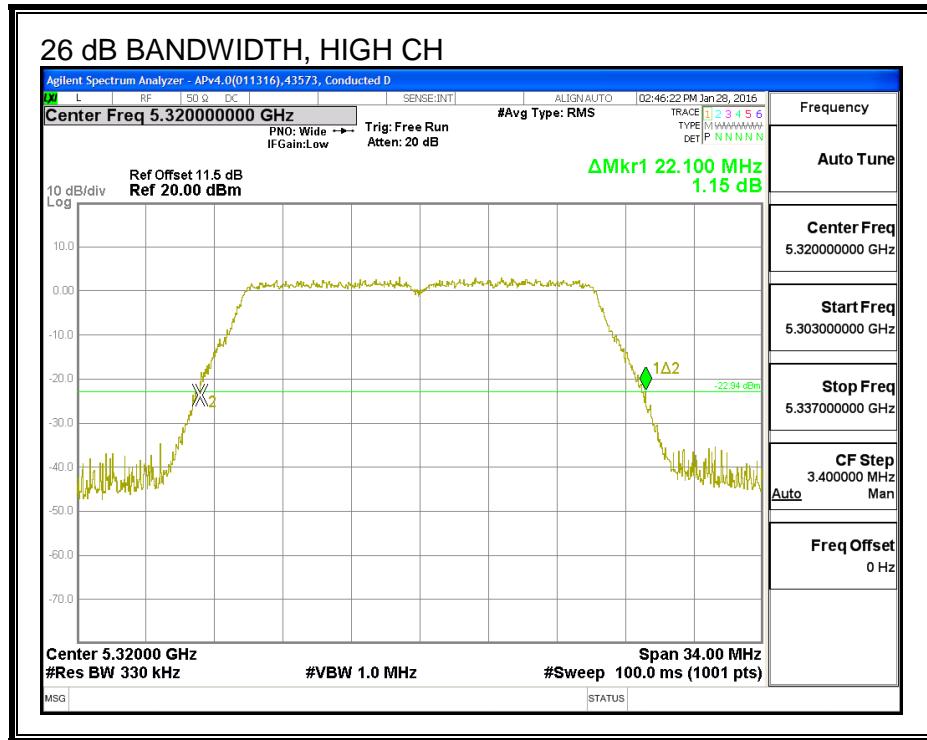

26 DB BANDWIDTH, ANTENNA - C

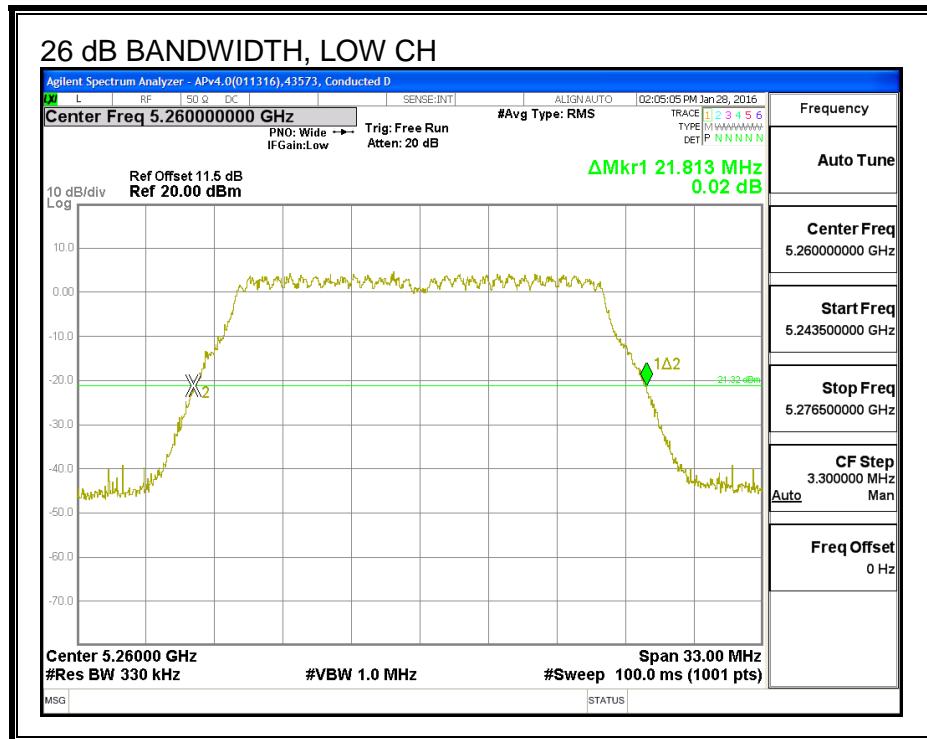

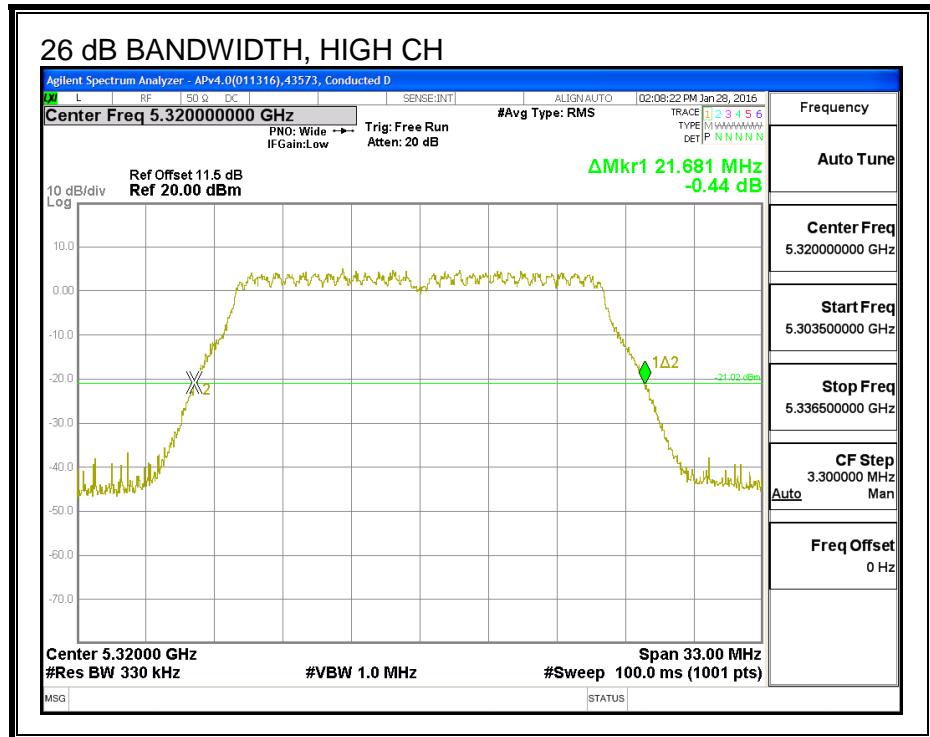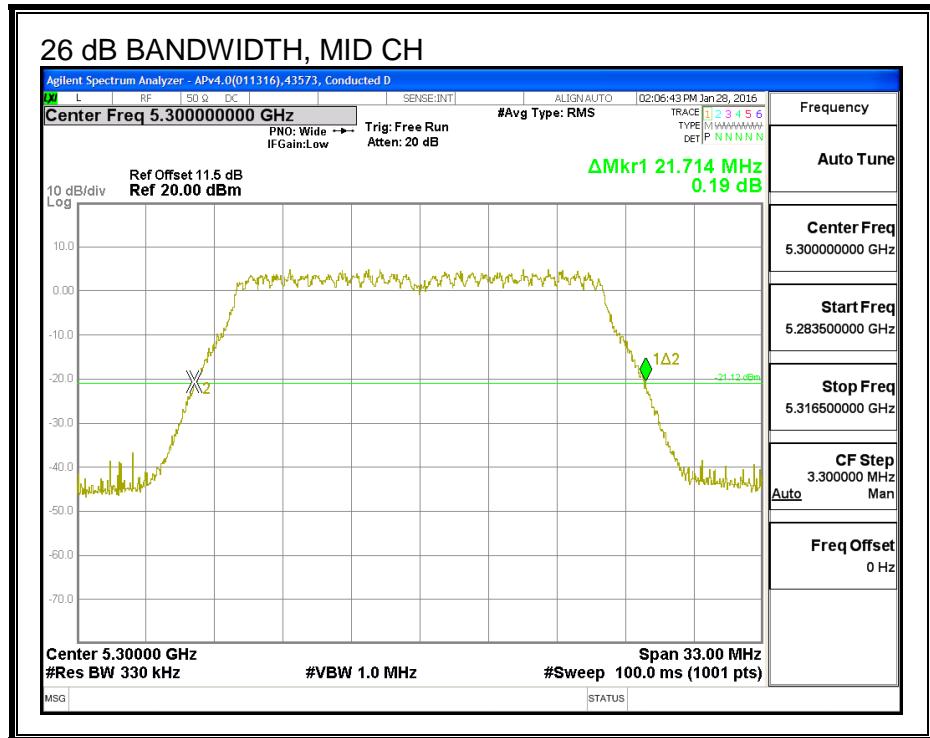

8.42.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna C (MHz)
Low	5260	17.845	17.930
Mid	5300	17.859	17.743
High	5320	17.776	17.765



99% BANDWIDTH, ANTENNA - A

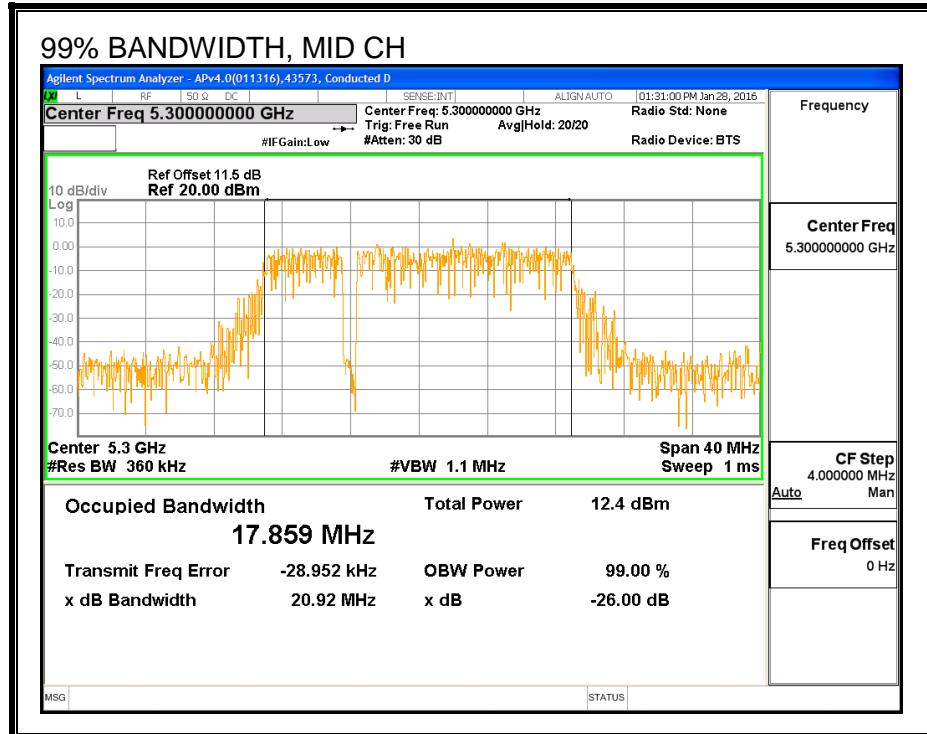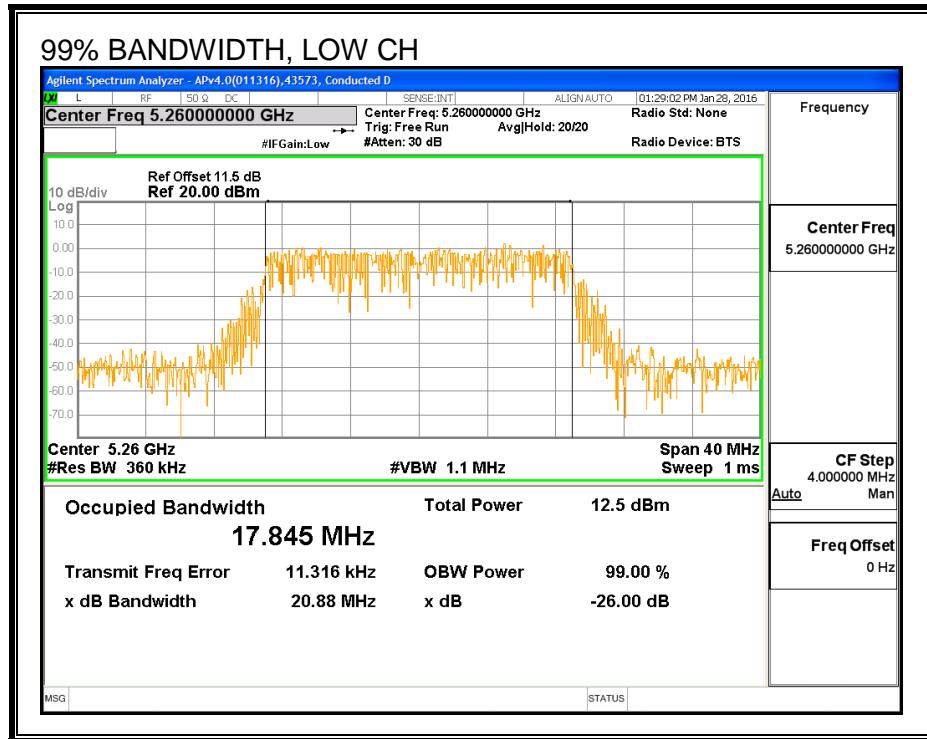

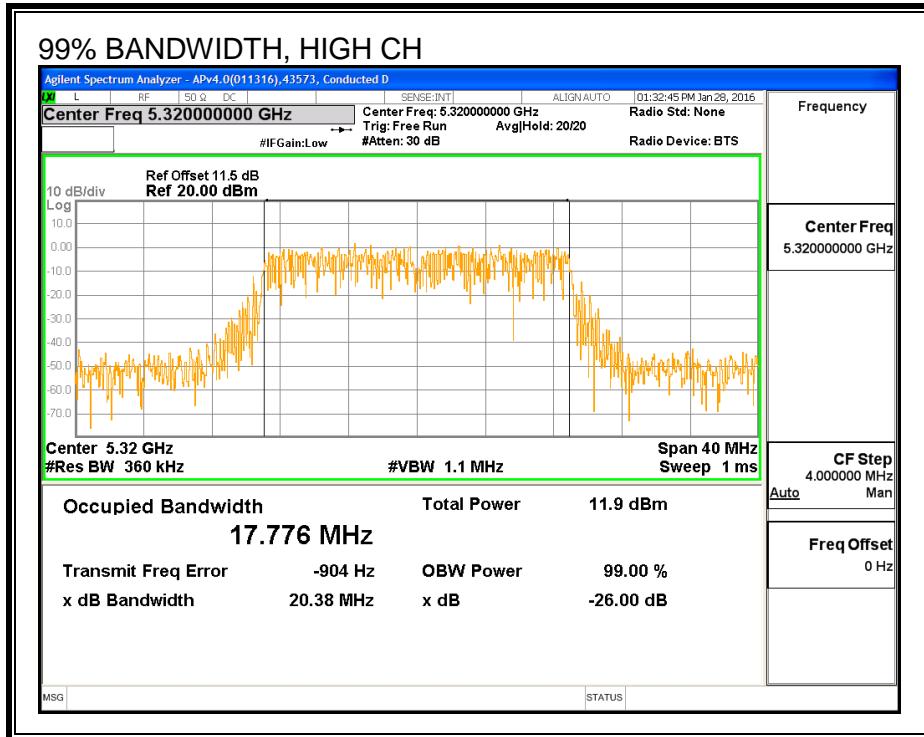

99% BANDWIDTH, ANTENNA - C

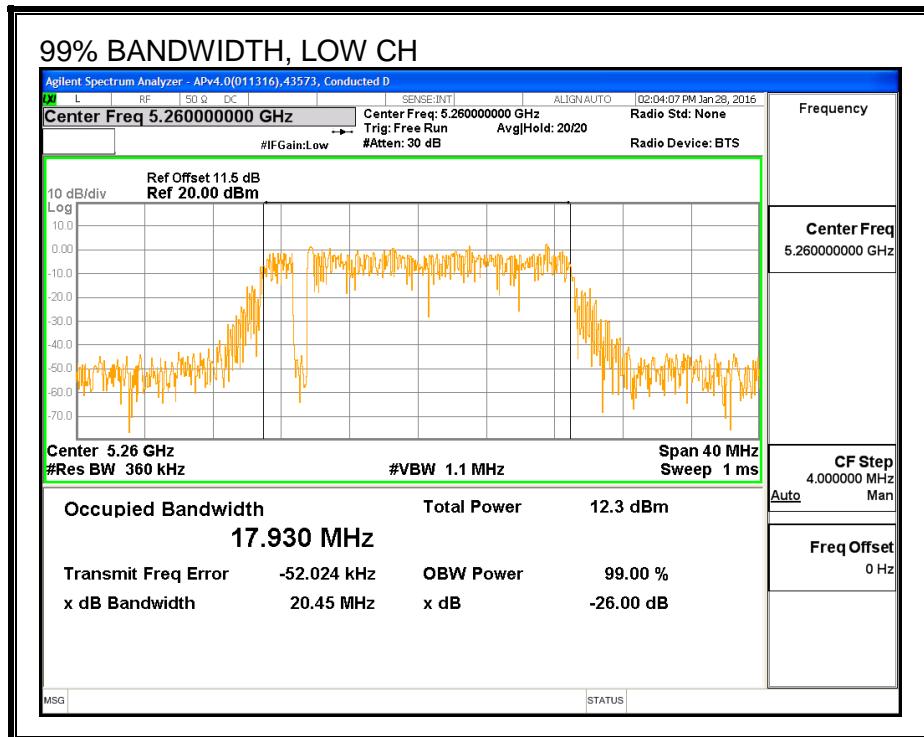

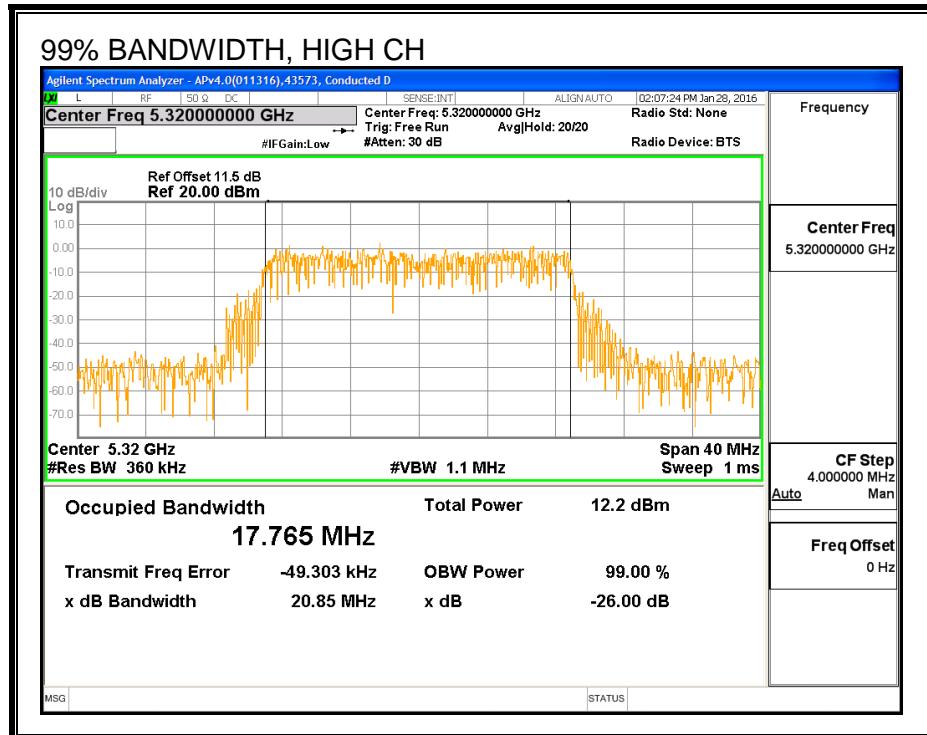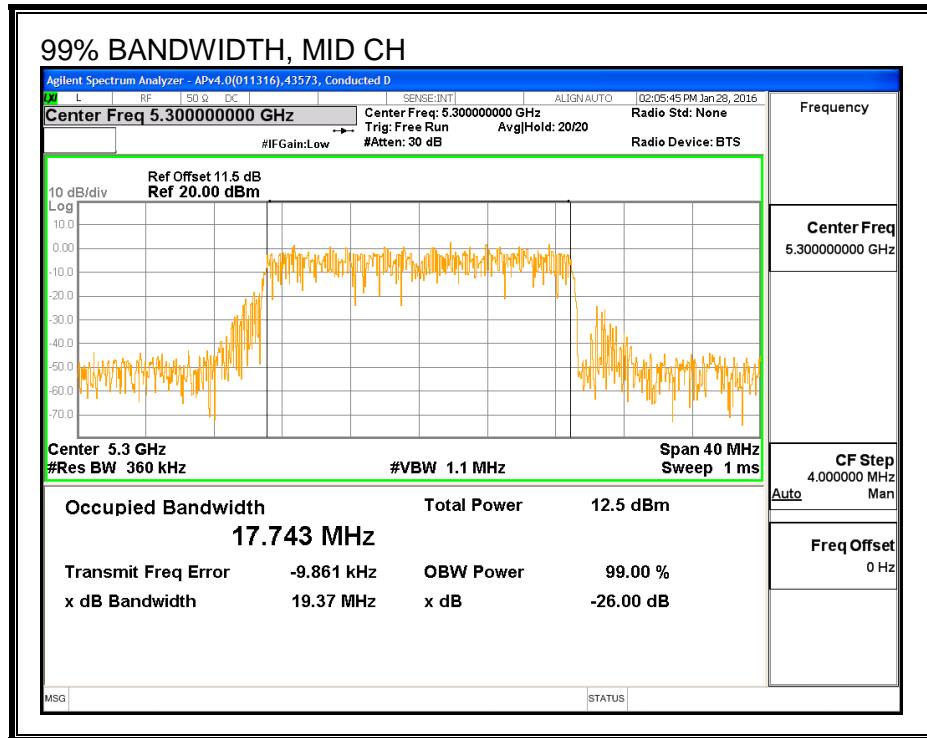

8.42.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Antenna A Power (dBm)	Antenna C Power (dBm)	Total Power (dBm)
Low	5260	16.91	15.40	19.23
Mid	5300	16.88	15.47	19.24
High	5320	14.41	14.40	17.42

8.42.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A	Antenna C	Uncorrelated Chains Directional Gain (dBi)
Gain (dBi)	Gain (dBi)	Gain (dBi)
2.23	2.12	2.18

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.11	17.930	2.18	2.18	23.54	11.00
Mid	5300	22.03	17.859	2.18	2.18	23.52	11.00
High	5320	22.10	17.776	2.18	2.18	23.50	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna C Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.91	15.40	19.23	23.54	-4.31
Mid	5300	16.88	15.47	19.24	23.52	-4.28
High	5320	14.41	14.40	17.42	23.50	-6.08

PSD Results


Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna C Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	5.58	3.82	7.80	11.00	-3.20
Mid	5300	5.39	4.09	7.80	11.00	-3.20
High	5320	3.08	2.86	5.98	11.00	-5.02



PSD, ANTENNA - A

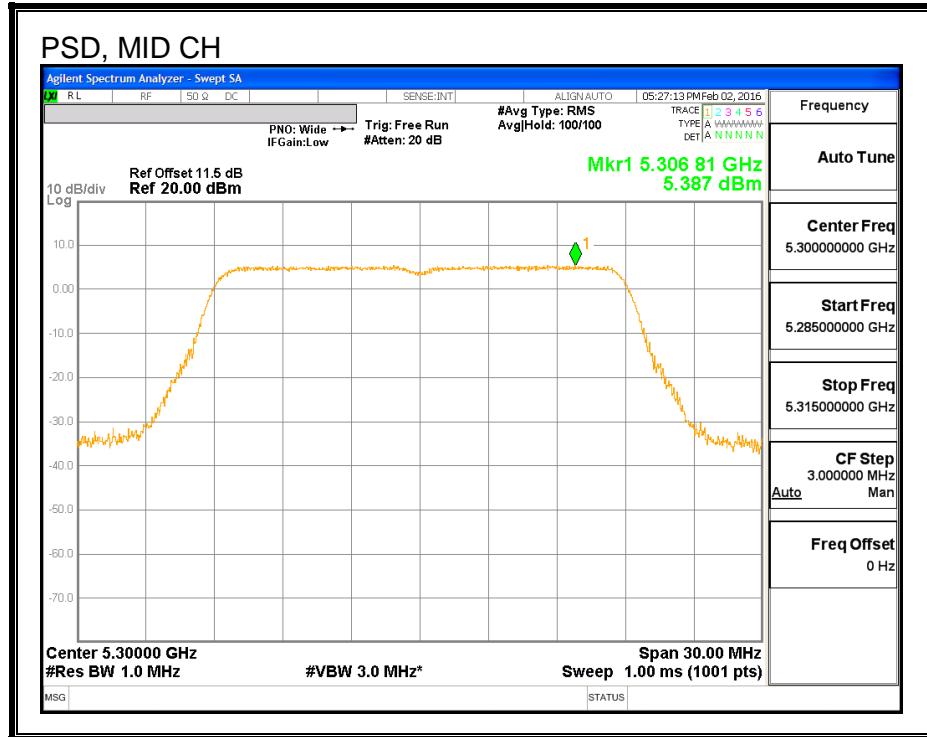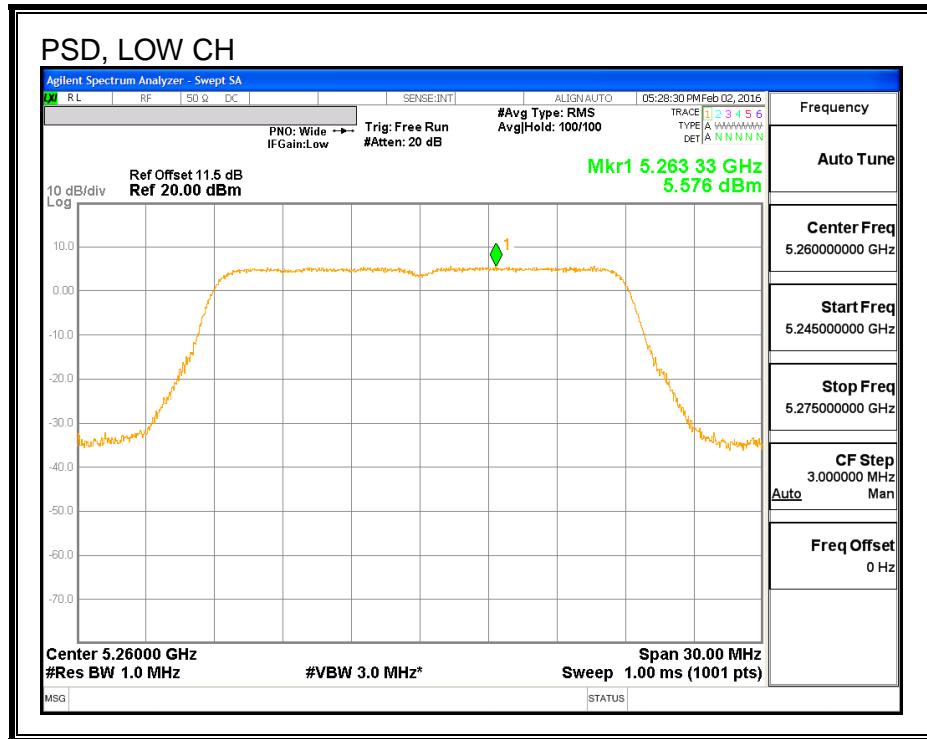

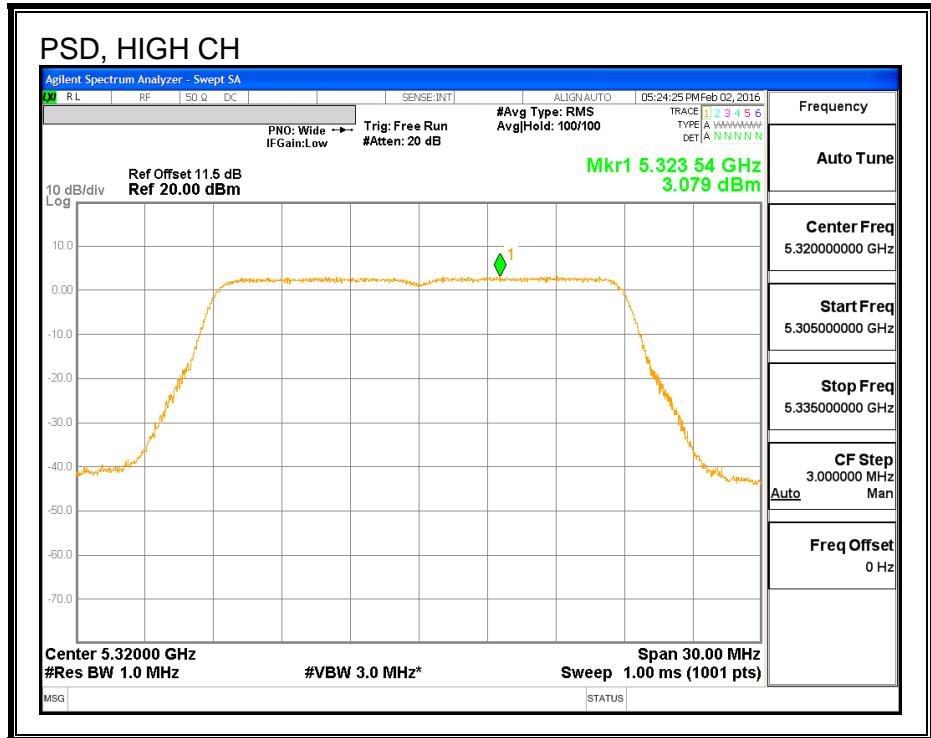

PSD, ANTENNA - C

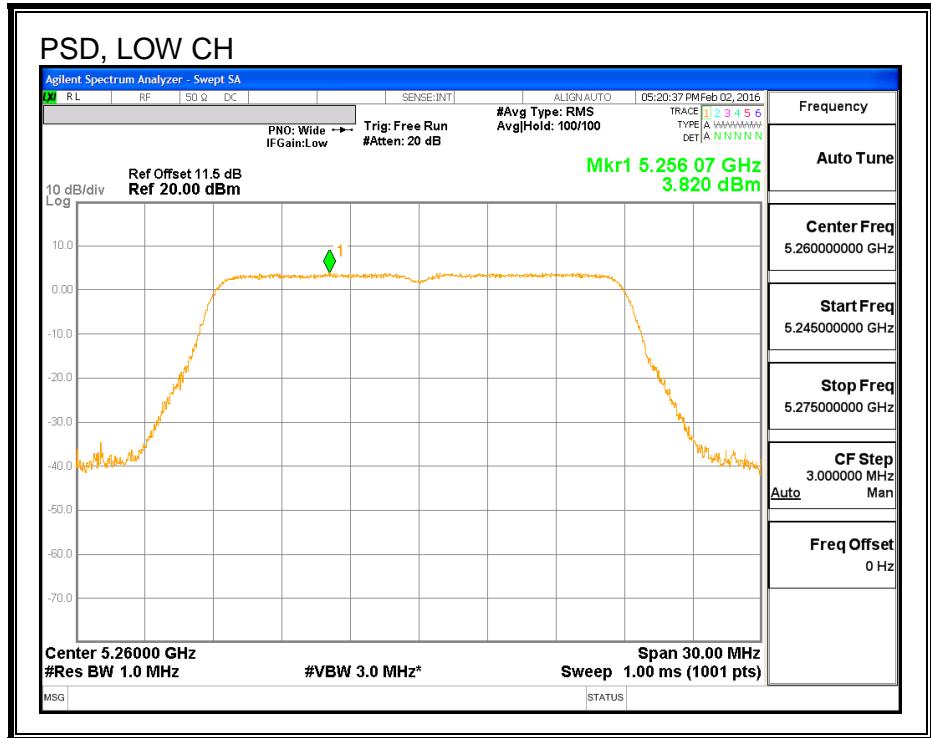

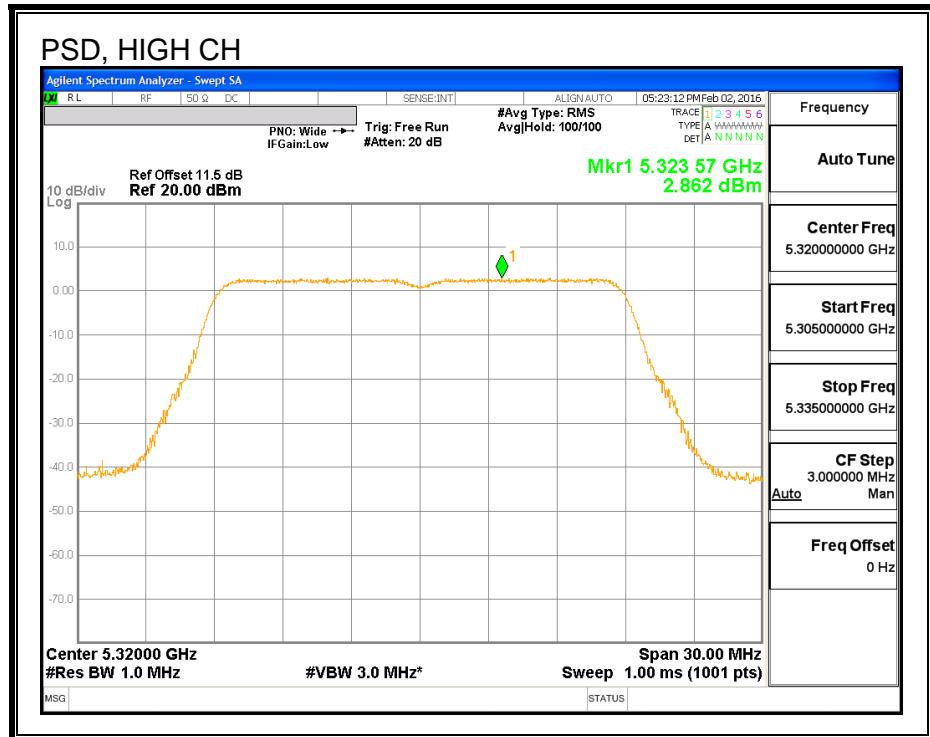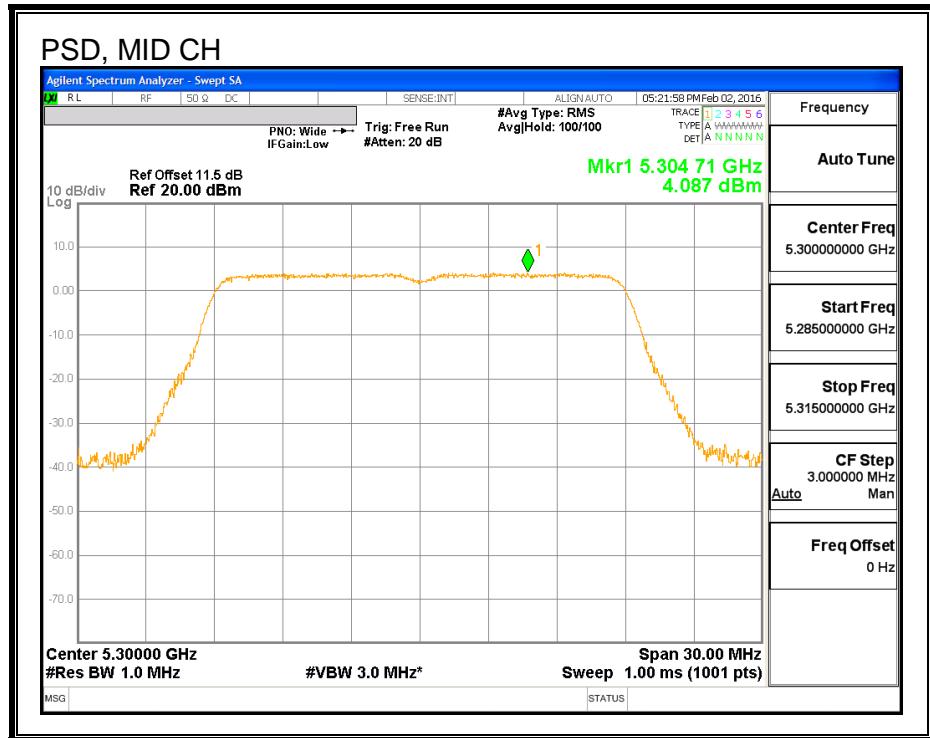

8.43. 802.11n HT20 ANTENNA B+A SDM MODE IN THE 5.3 GHz BAND

Noted: Covered by 802.11n HT20 ANTENNA B+A STBC MODE IN THE 5.3 GHz BAND

8.44. 802.11n HT20 ANTENNA A+C SDM MODE IN THE 5.3 GHz BAND

Noted: Covered by 802.11n HT20 ANTENNA A+C STBC MODE IN THE 5.3 GHz BAND

8.45. 802.11n HT40 ANTENNA - B MODE IN THE 5.3 GHz BAND

8.45.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.26
High	5310	39.84

26 dB BANDWIDTH

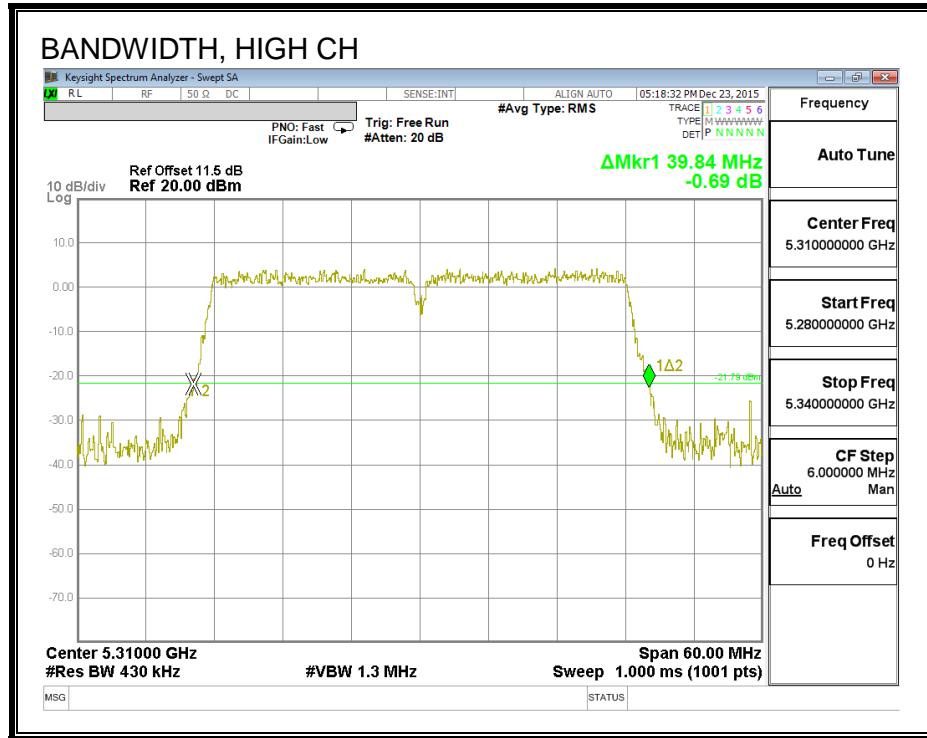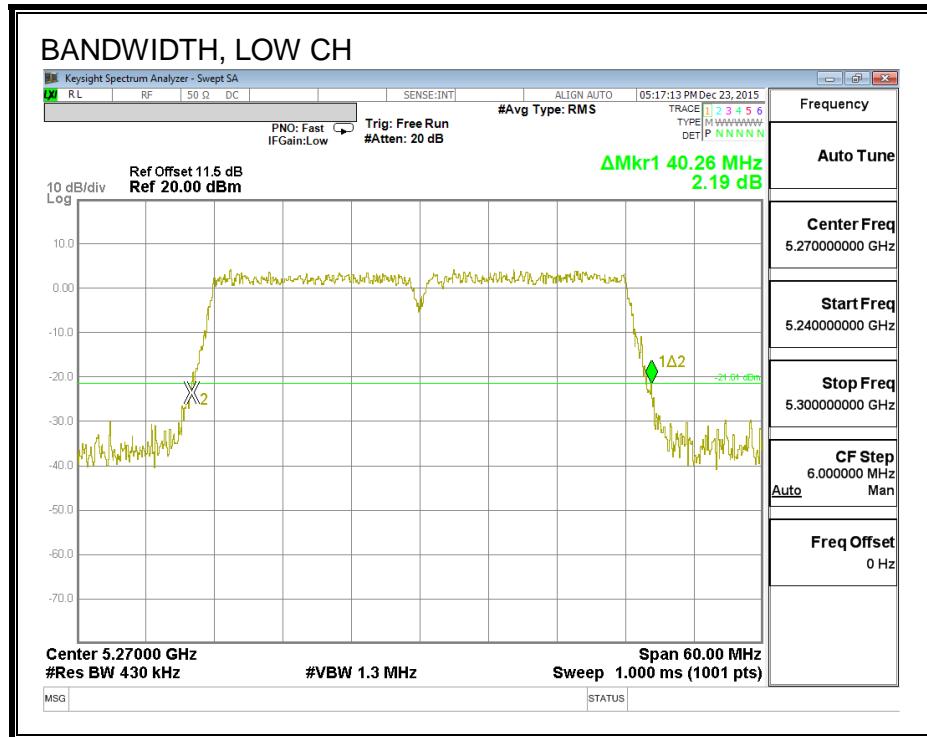

8.45.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.288
High	5310	36.087

99% BANDWIDTH

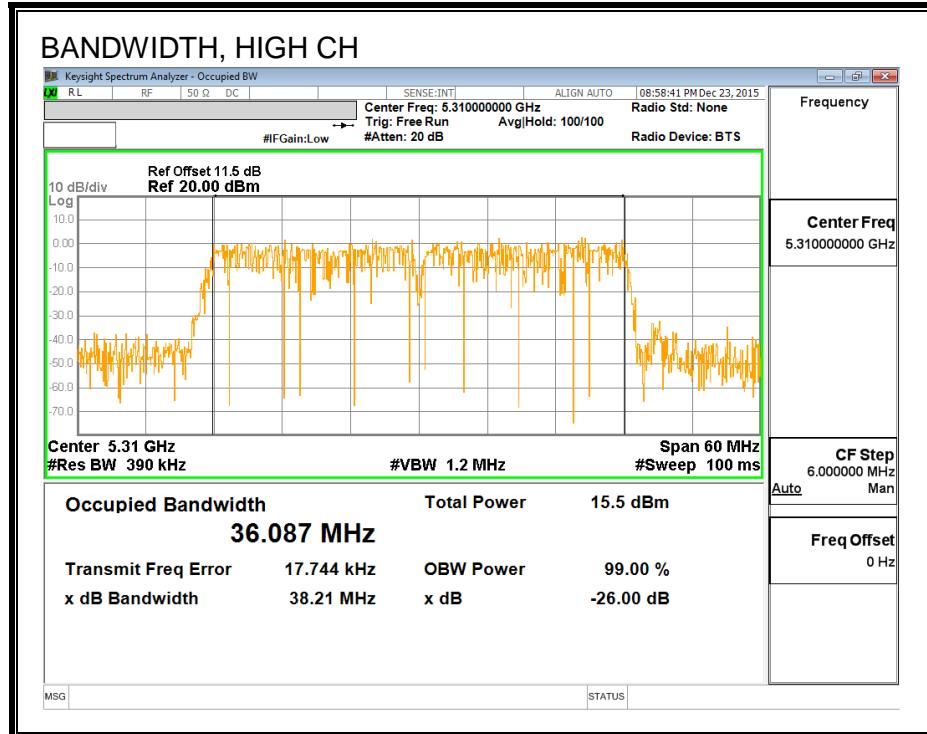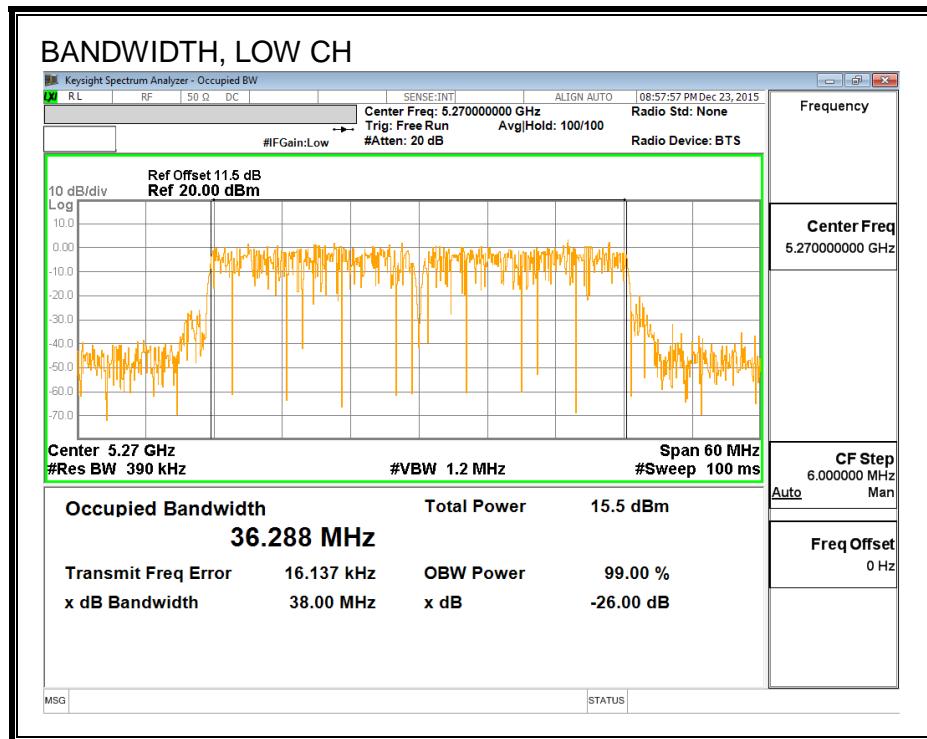

8.45.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5270	16.95
High	5310	14.98

8.45.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.26	36.288	3.02	24.00	11.00
High	5310	39.84	36.087	3.02	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PPSD
--------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	16.95	16.95	24.00	-7.05
High	5310	14.98	14.98	24.00	-9.02

PSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	2.49	2.49	11.00	-8.51
High	5310	0.51	0.51	11.00	-10.49

PSD

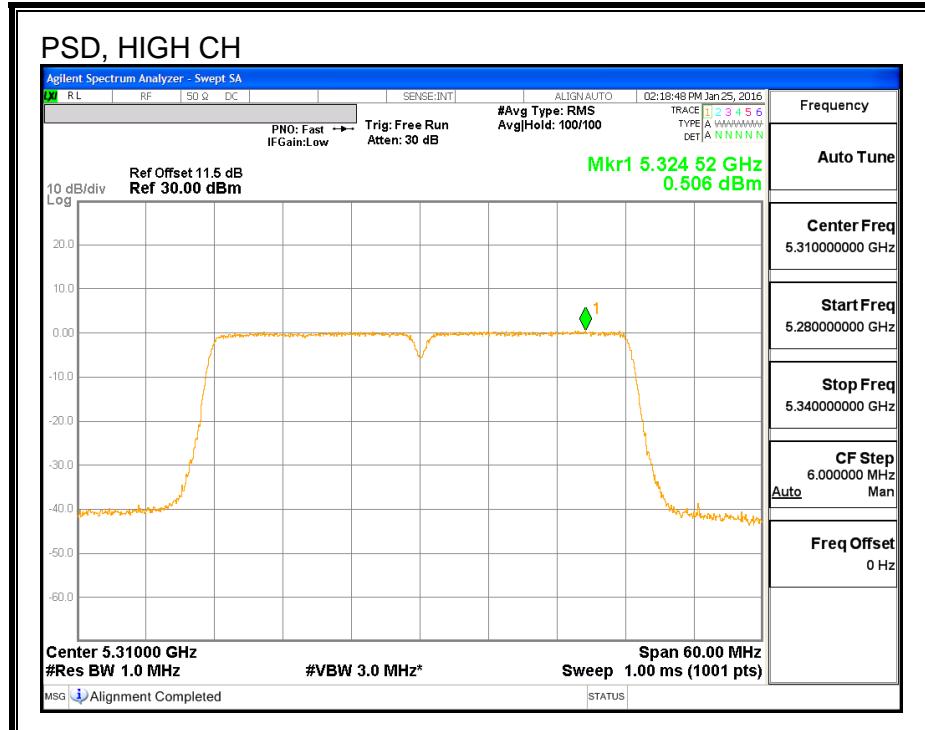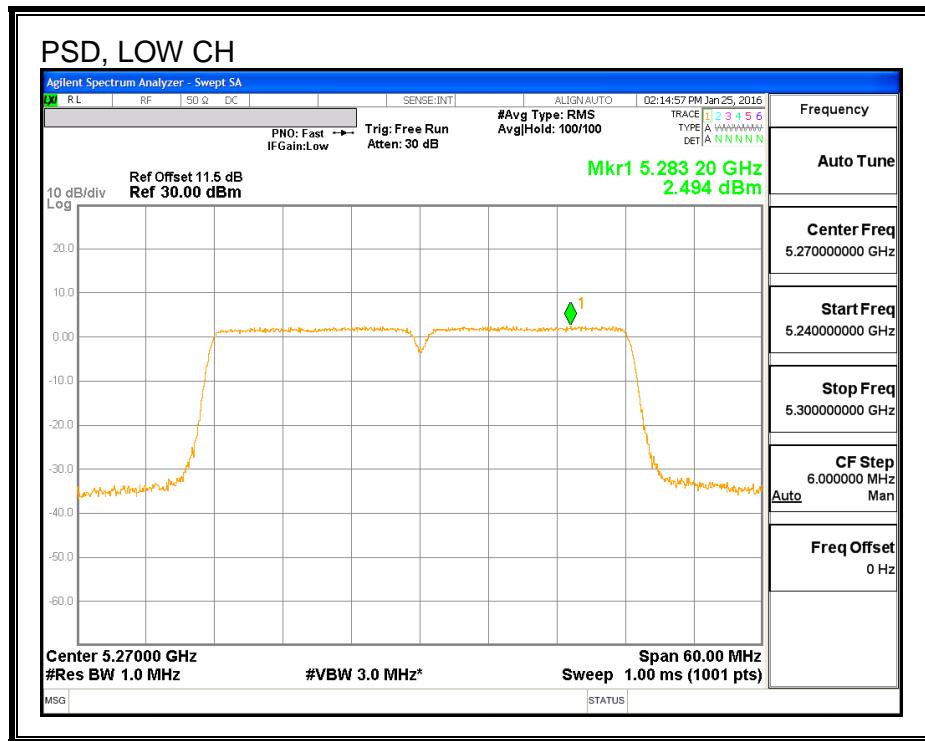

8.46. 802.11n HT40 ANTENNA - A MODE IN THE 5.3 GHz BAND

8.46.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.44
High	5310	40.20

26 dB BANDWIDTH

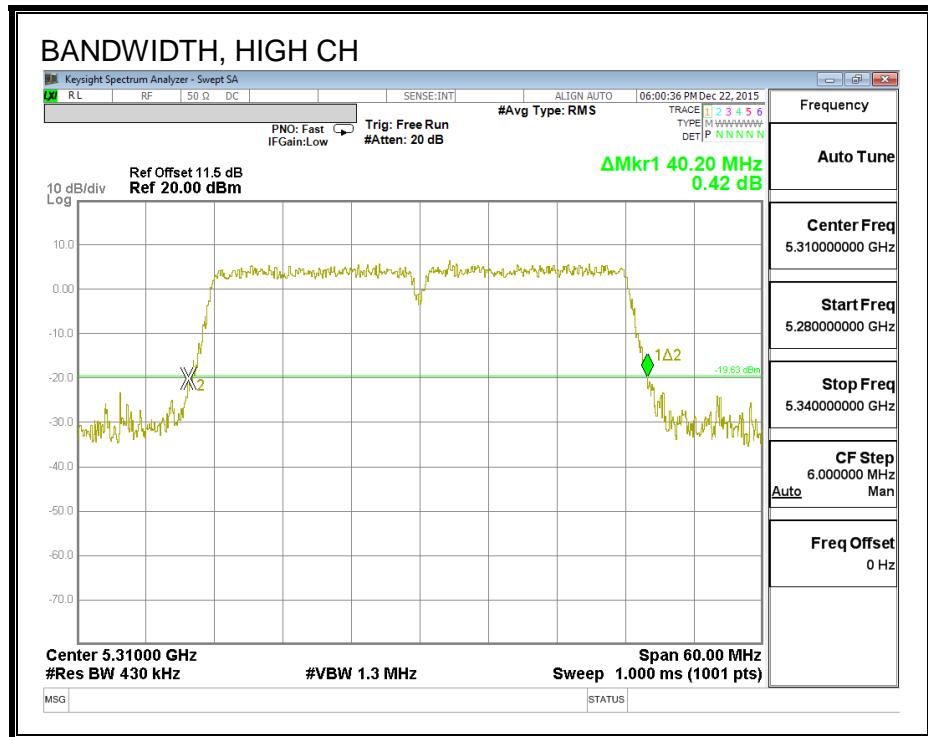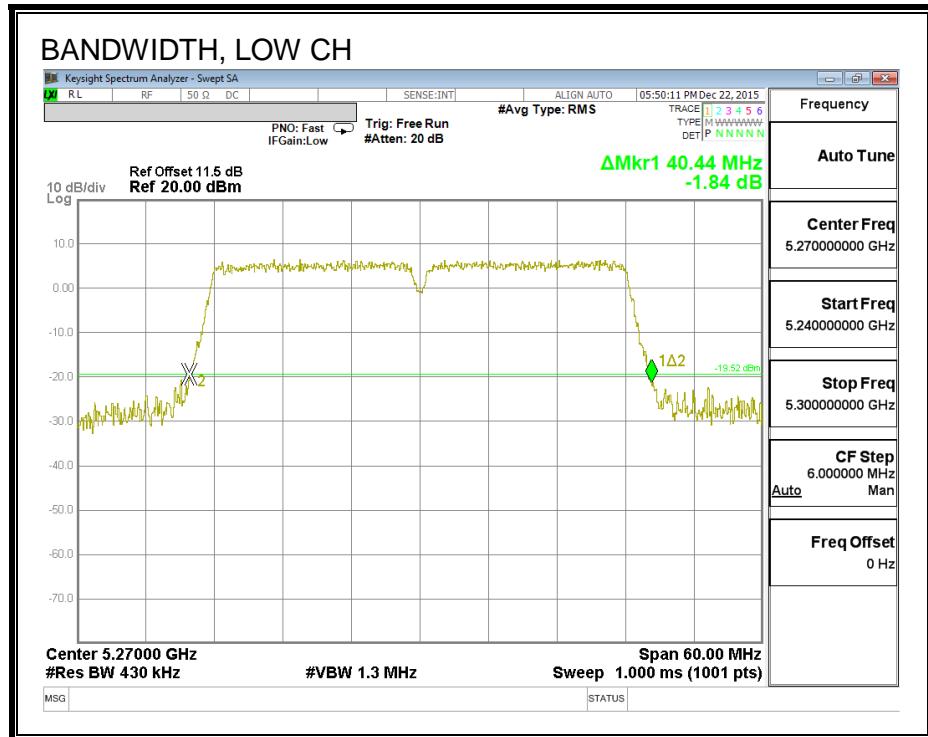

8.46.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.224
High	5310	36.270

99% BANDWIDTH

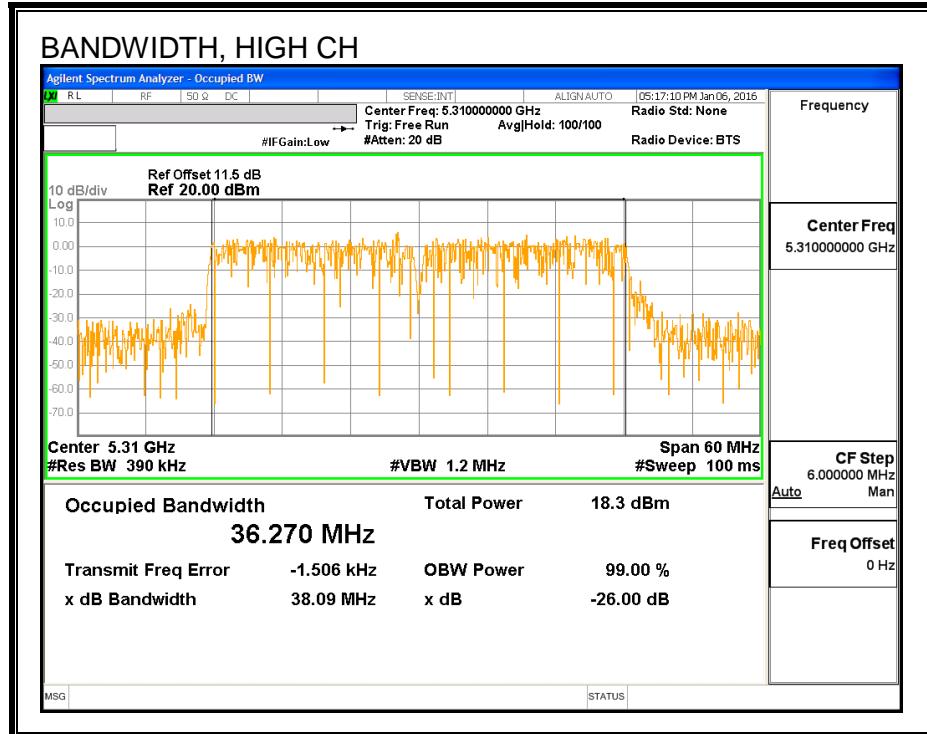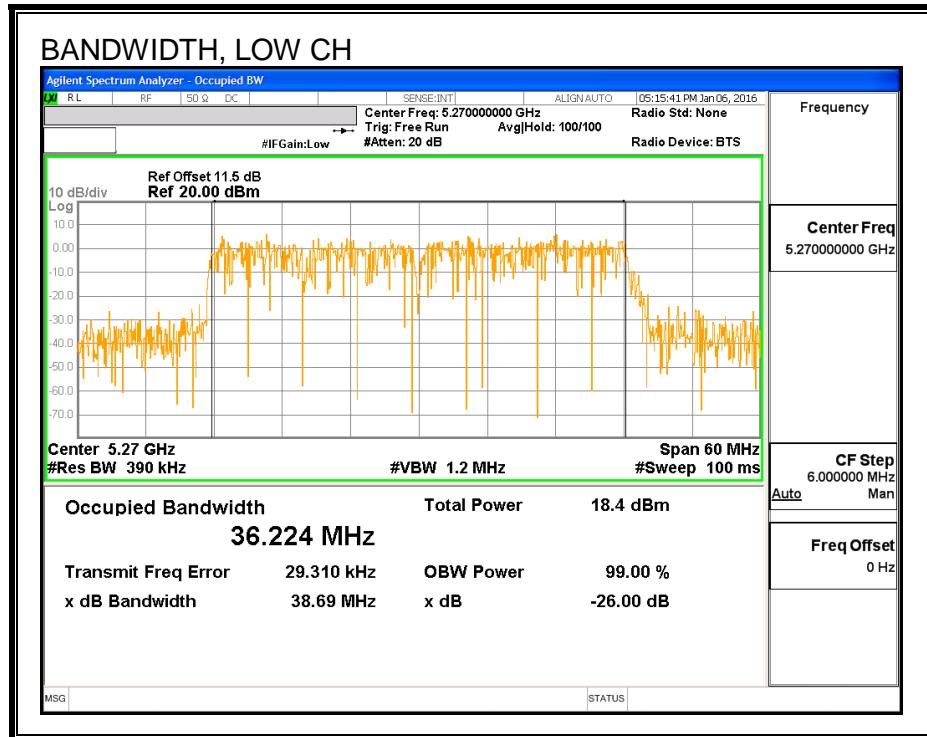

8.46.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5270	17.31
High	5310	14.95

8.46.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.44	36.224	2.23	24.00	11.00
High	5310	40.20	36.270	2.23	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	17.31	17.31	24.00	-6.69
High	5310	14.95	14.95	24.00	-9.05

PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	2.82	2.82	11.00	-8.18
High	5310	0.60	0.60	11.00	-10.40

PSD

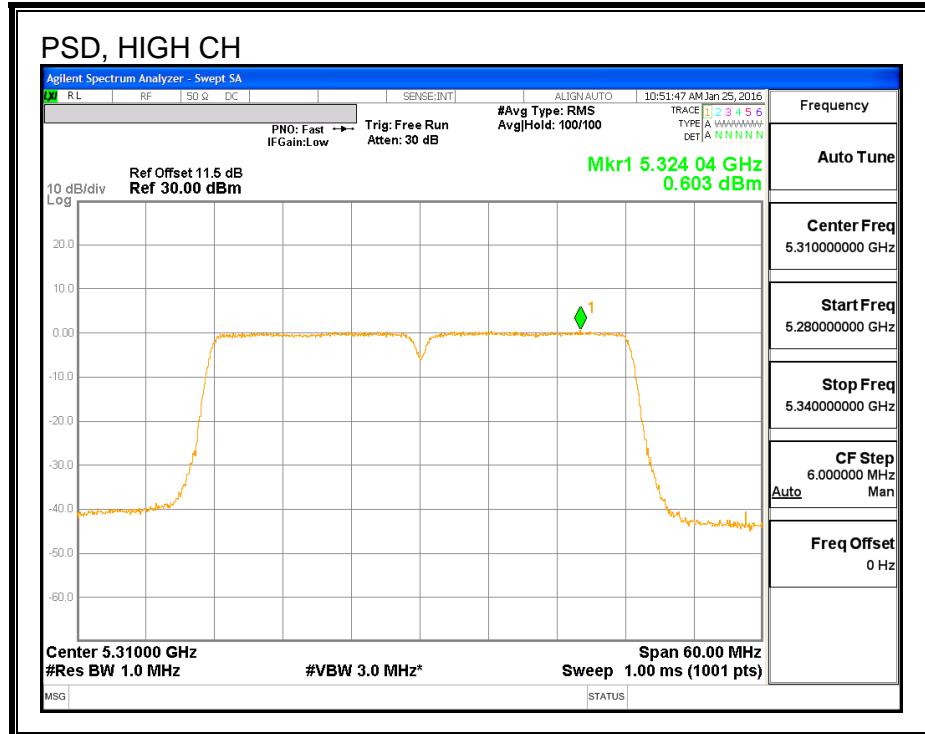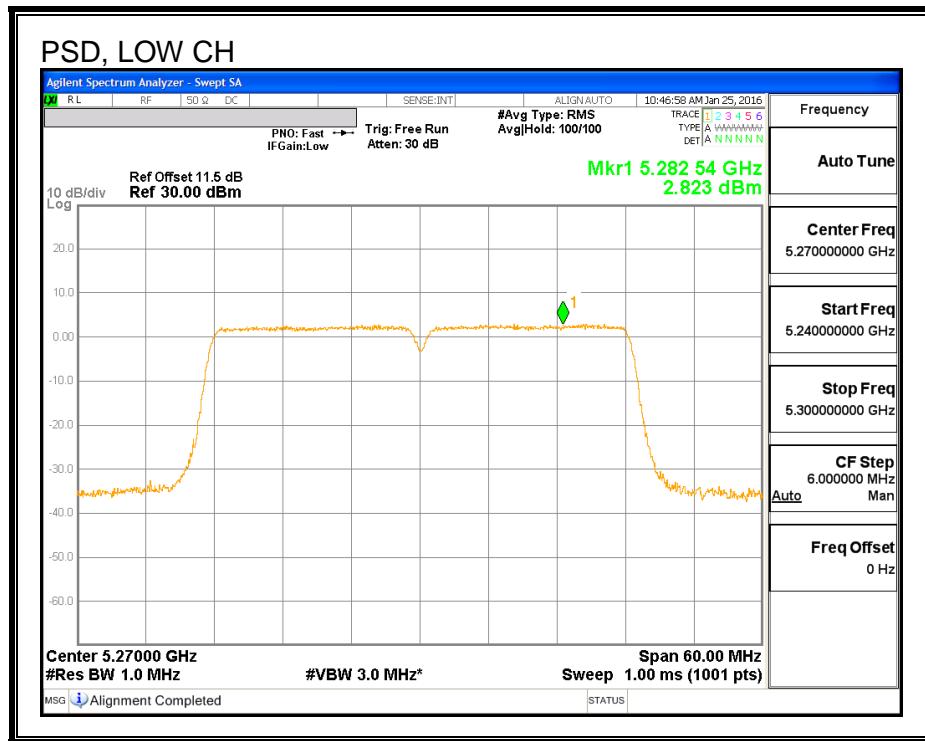

8.47. 802.11n HT40 ANTENNA - C MODE IN THE 5.3 GHz BAND

8.47.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.57
High	5310	40.57

26 dB BANDWIDTH

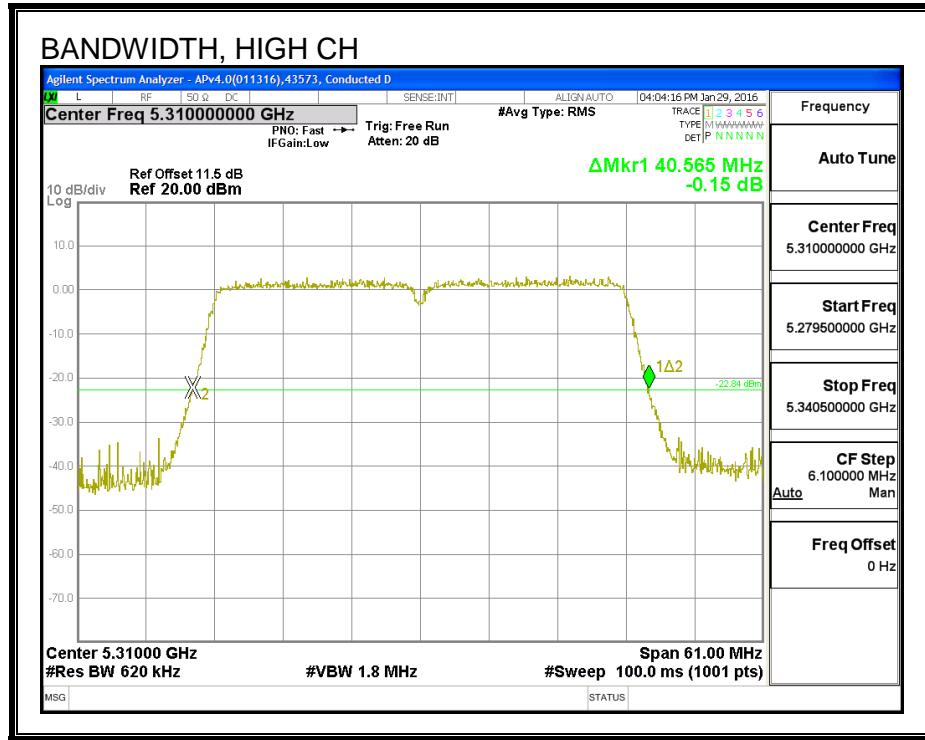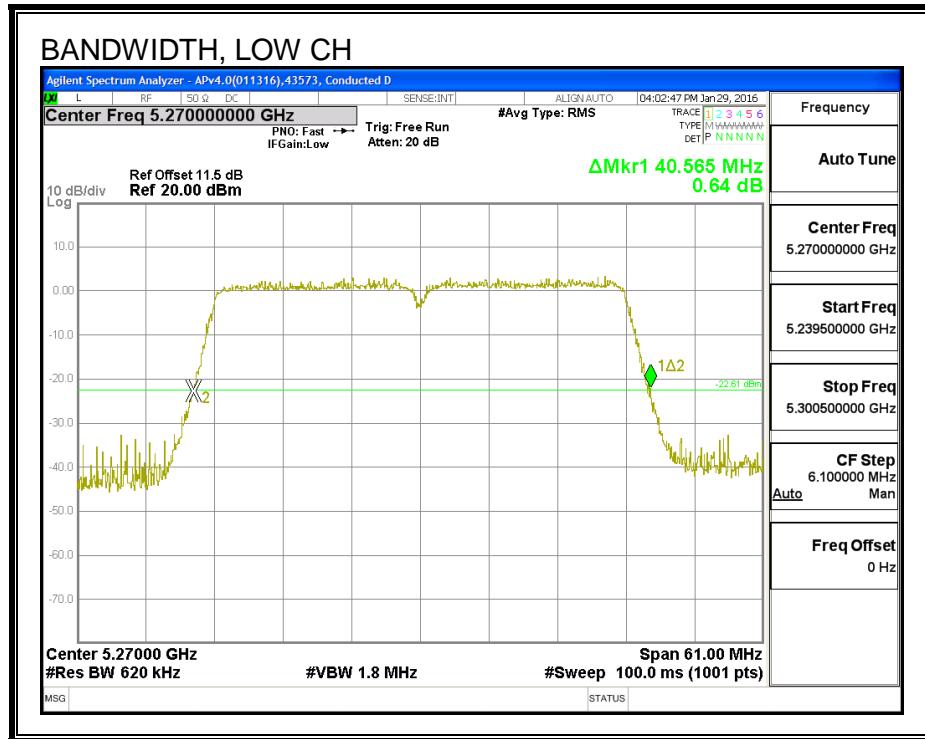

8.47.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.432
High	5310	36.428

99% BANDWIDTH

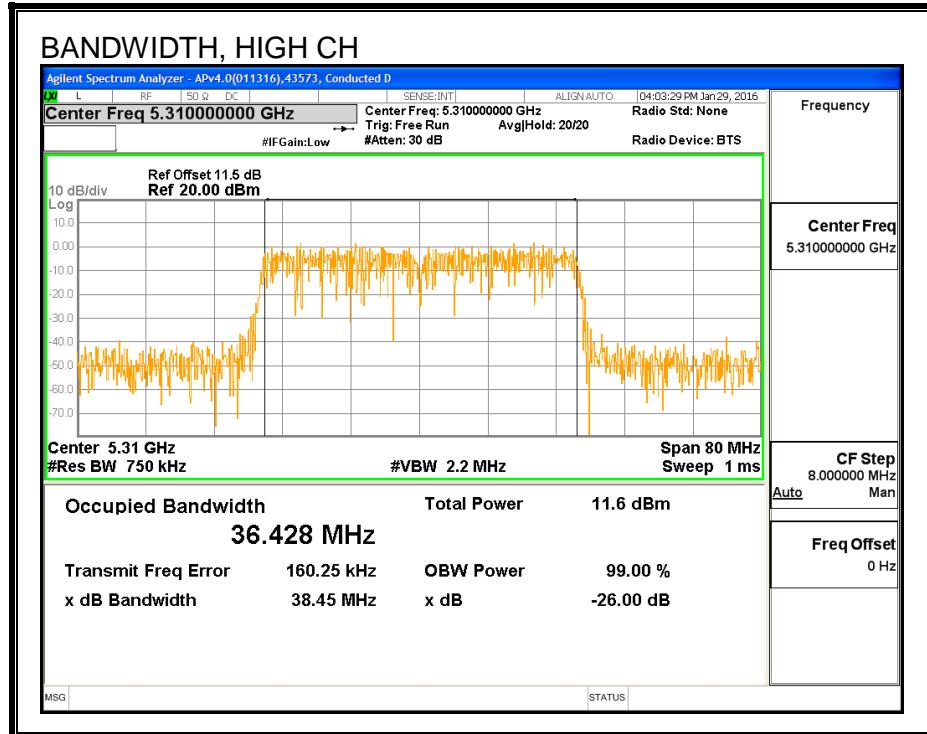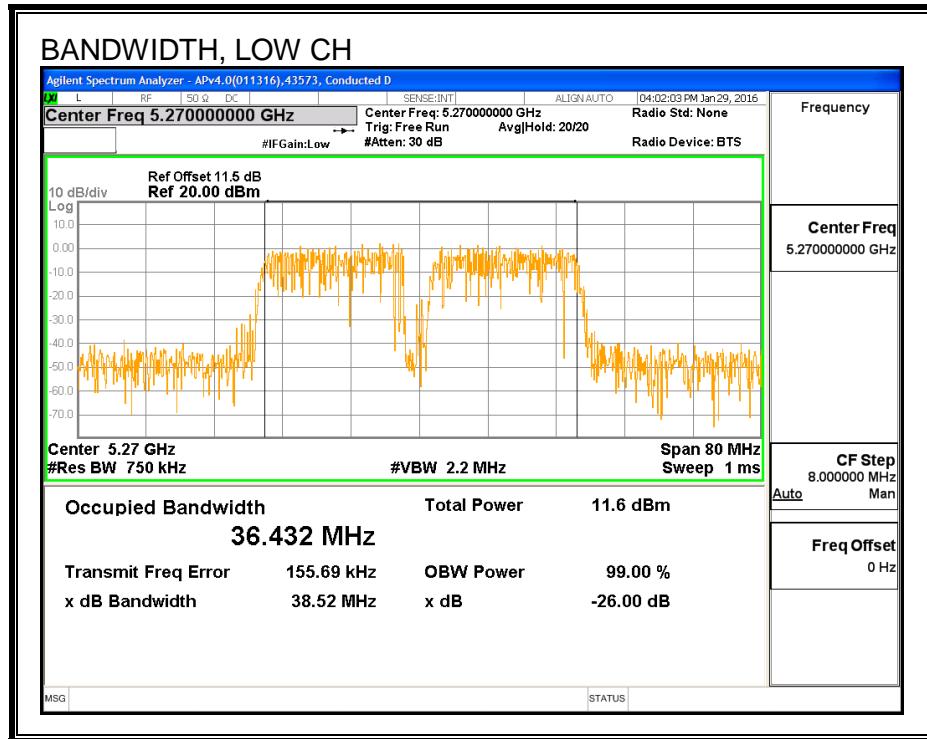

8.47.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5270	15.47
High	5310	14.99

8.47.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.57	36.432	2.12	24.00	11.00
High	5310	40.57	36.428	2.12	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Antenna C Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.47	15.47	24.00	-8.53
High	5310	14.99	14.99	24.00	-9.01

PSD Results

Channel	Frequency (MHz)	Antenna C Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	0.97	0.97	11.00	-10.03
High	5310	0.55	0.55	11.00	-10.45

PSD

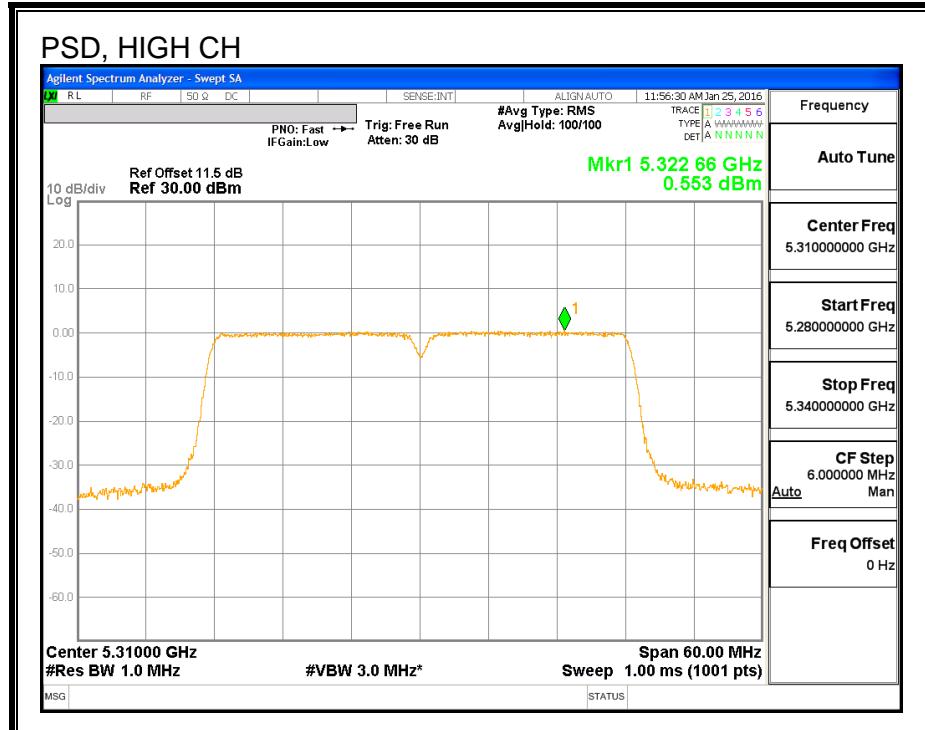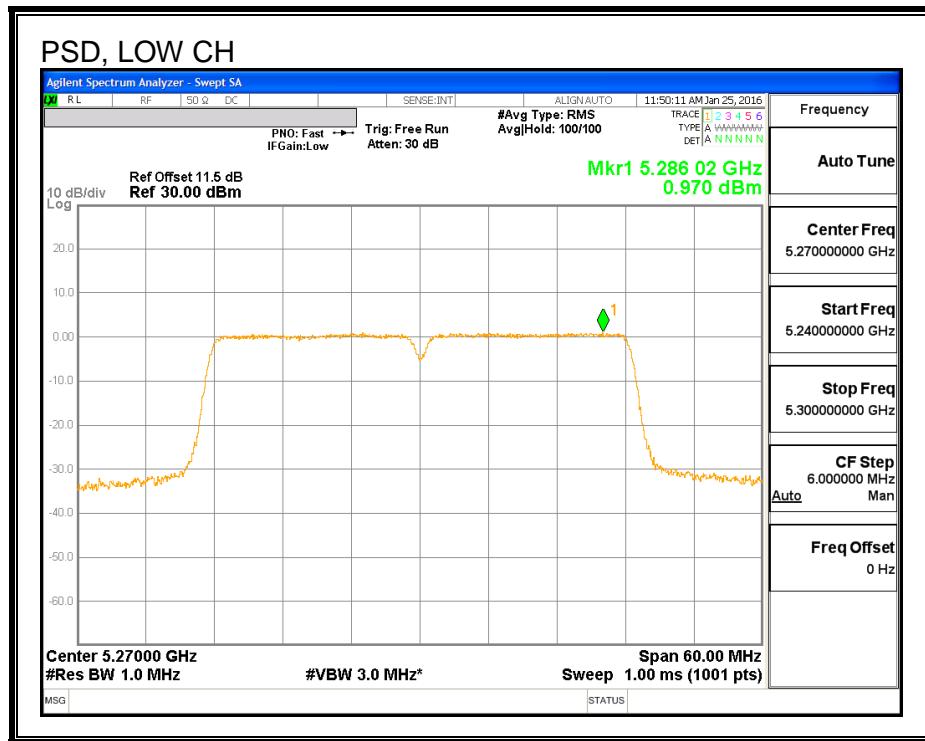

8.48. 802.11n HT40 ANTENNA B+A CDD MODE IN THE 5.3 GHz BAND

8.48.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna B (MHz)	26 dB BW Antenna A (MHz)
Low	5270	40.08	39.36
High	5310	39.84	39.42

26 DB BANDWIDTH, ANTENNA - B

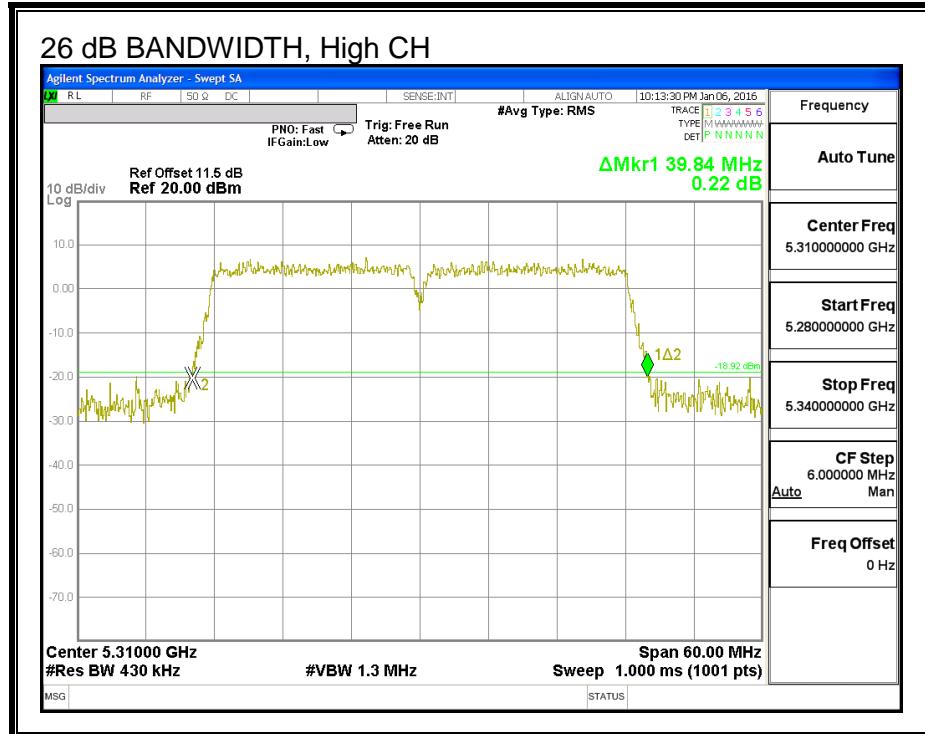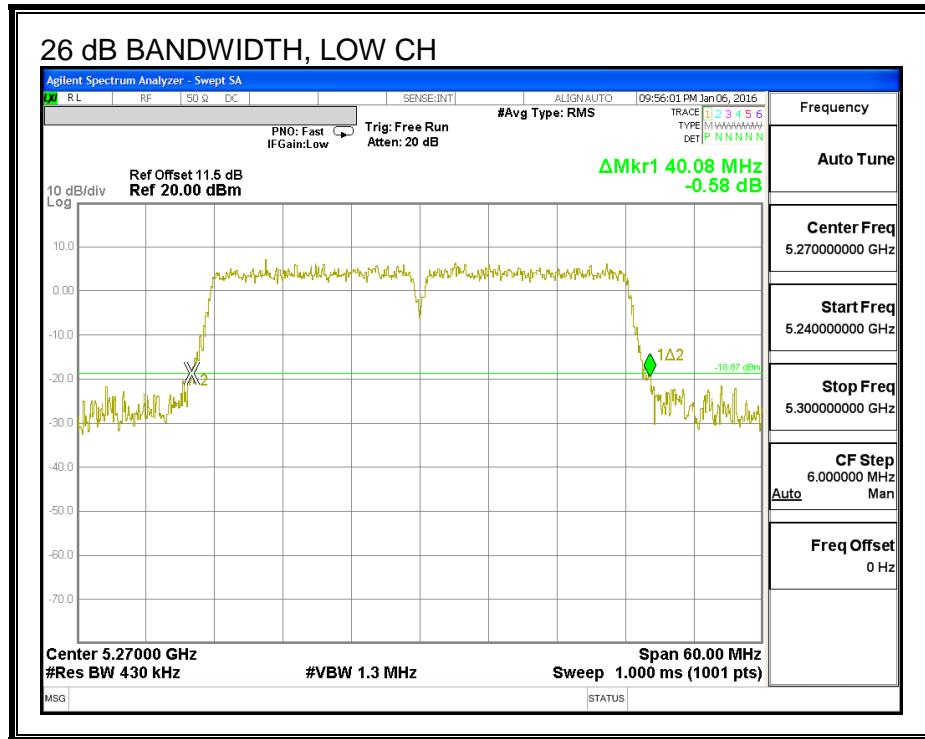

26 DB BANDWIDTH, ANTENNA - A

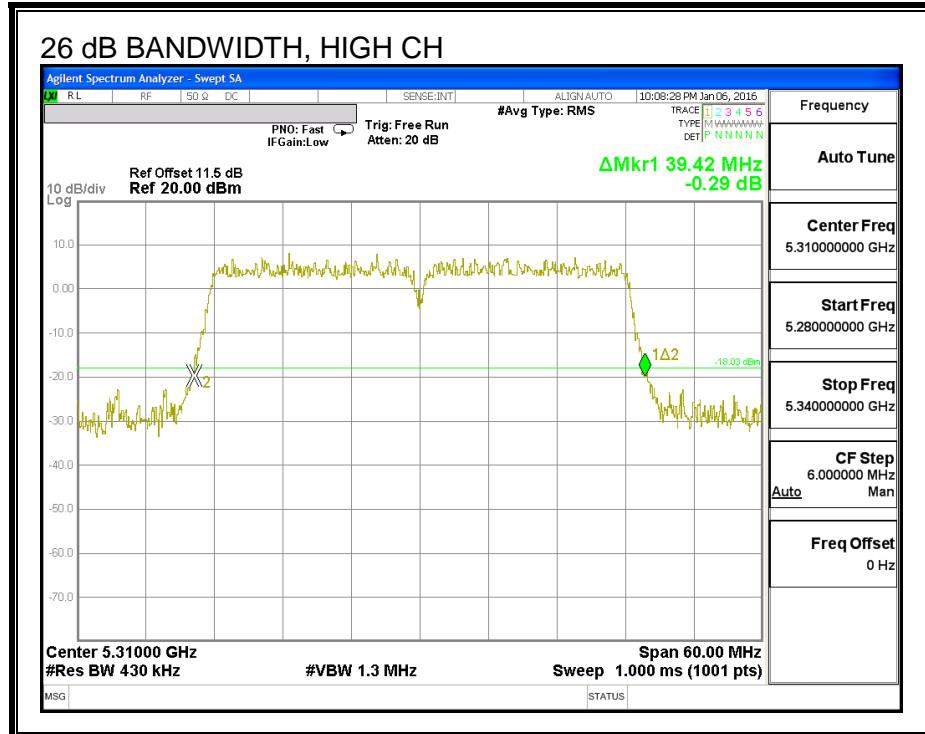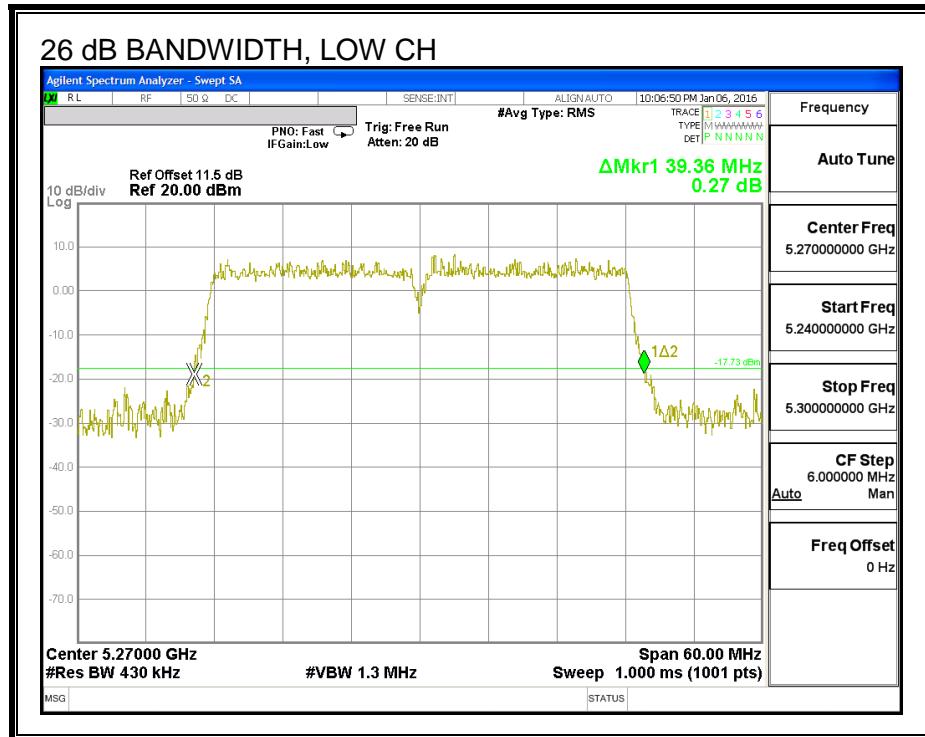

8.48.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Antenna B (MHz)	99% BW Antenna A (MHz)
Low	5270	36.129	36.226
High	5310	36.324	36.241

99% BANDWIDTH, ANTENNA - B

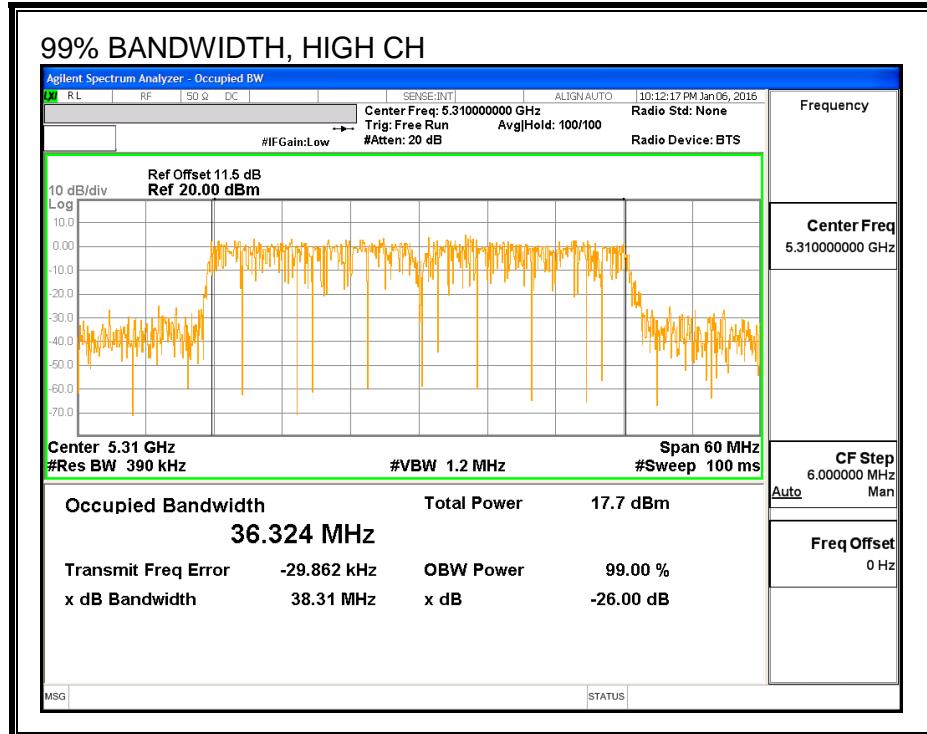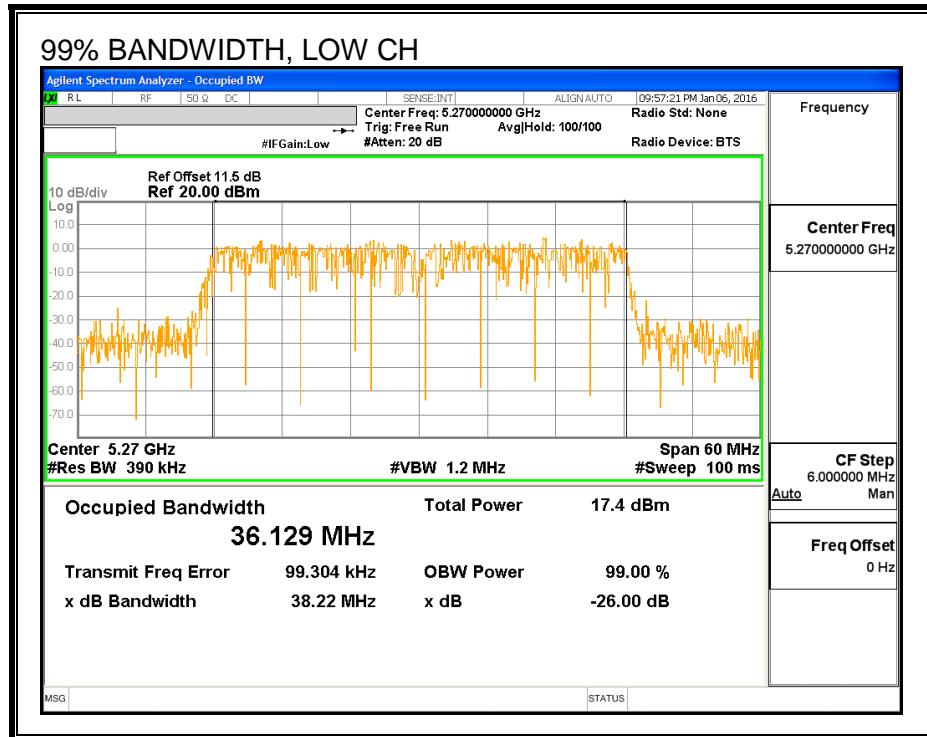

99% BANDWIDTH, ANTENNA - A

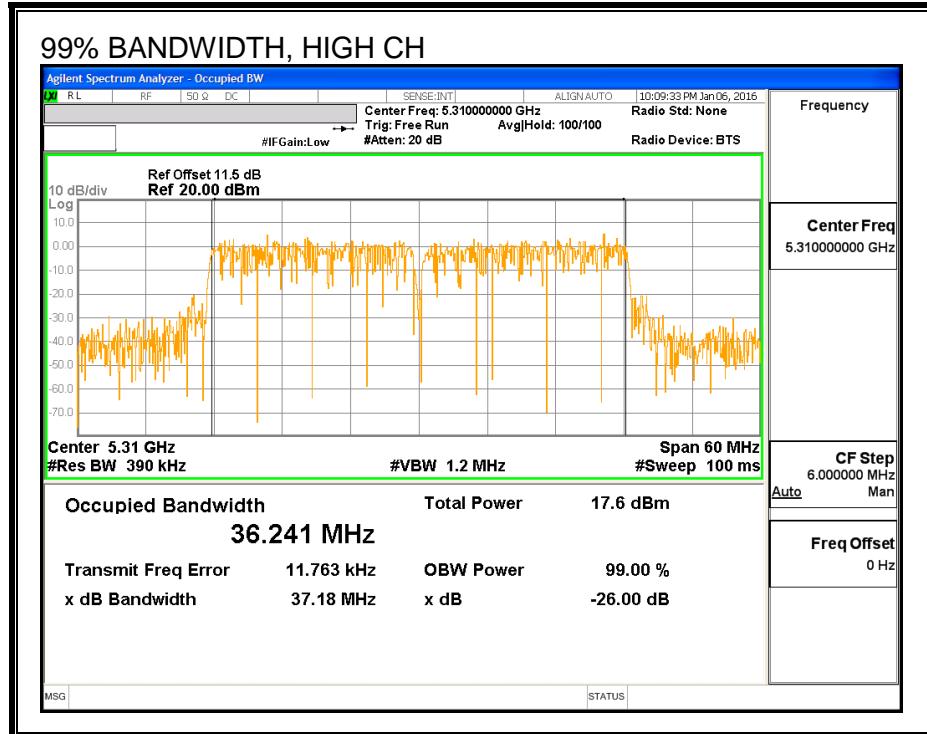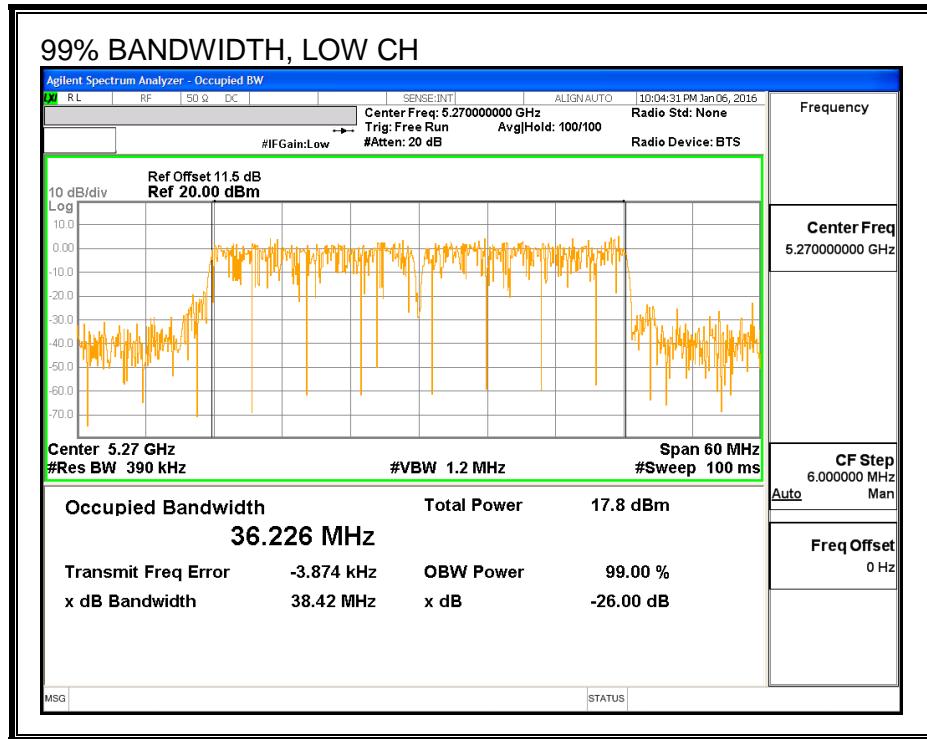

8.48.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	5270	15.95	15.99	18.98
High	5310	13.93	13.83	16.89

8.48.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna B	Antenna A	Uncorrelated Chains Directional Gain (dBi)
Gain (dBi)	Gain (dBi)	Gain (dBi)
3.02	2.23	2.64

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Antenna B	Antenna A	Correlated Chains Directional Gain (dBi)
Gain (dBi)	Gain (dBi)	Gain (dBi)
3.02	2.23	5.64

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.08	36.226	2.64	5.64	24.00	11.00
High	5310	39.84	36.324	2.64	5.64	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.95	15.99	18.98	24.00	-5.02
High	5310	13.93	13.83	16.89	24.00	-7.11



PSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	1.53	1.46	4.51	11.00	-6.49
High	5310	-0.41	-0.58	2.52	11.00	-8.48

PSD, ANTENNA - B

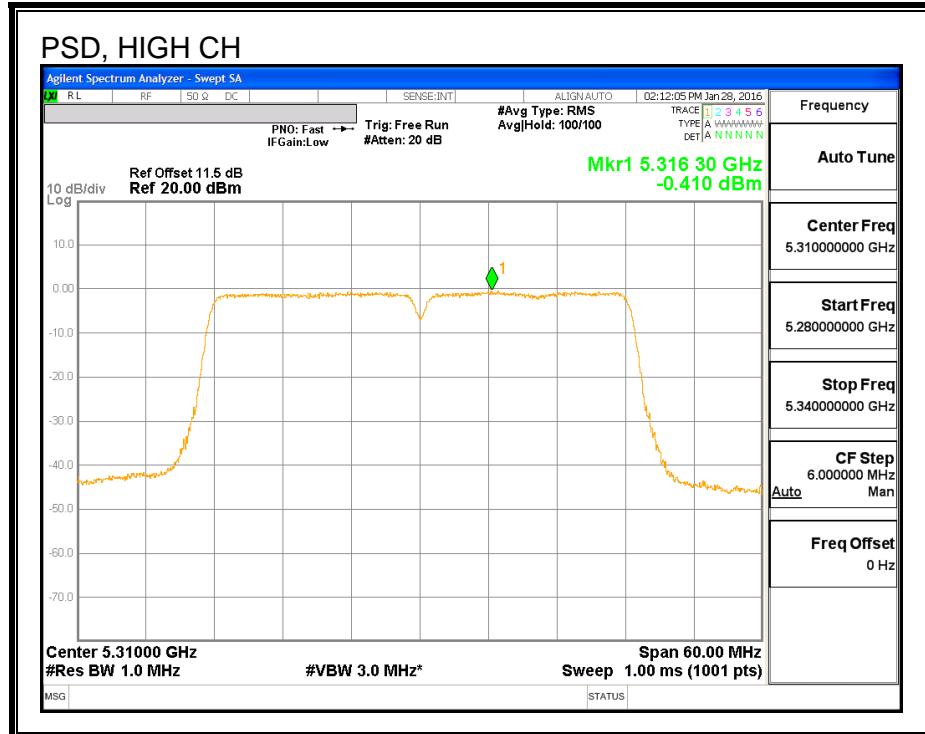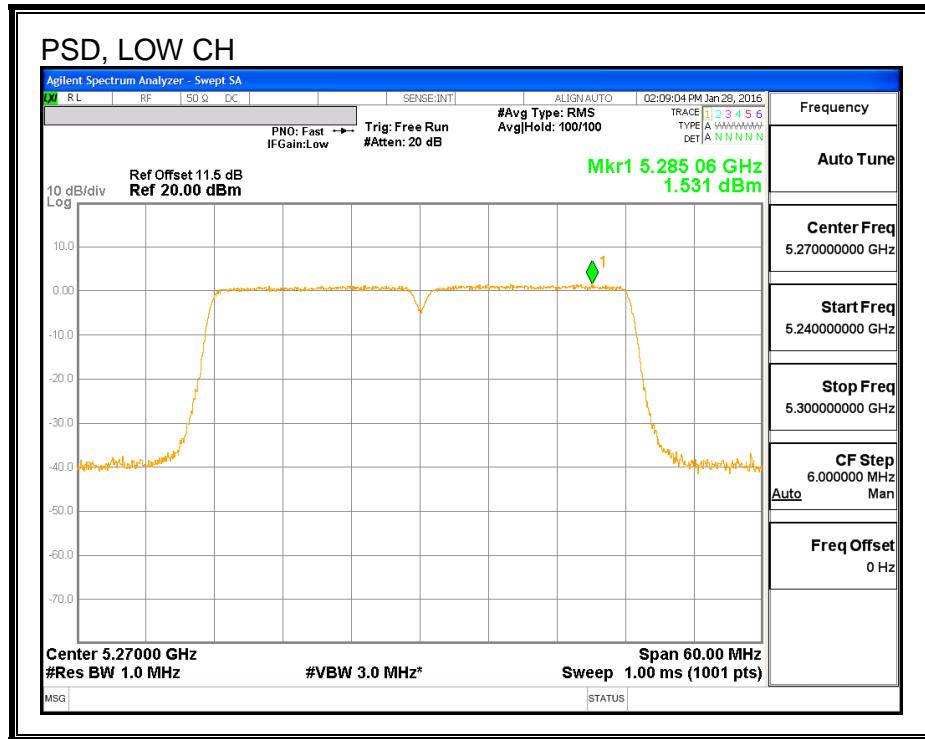

PSD, ANTENNA - A

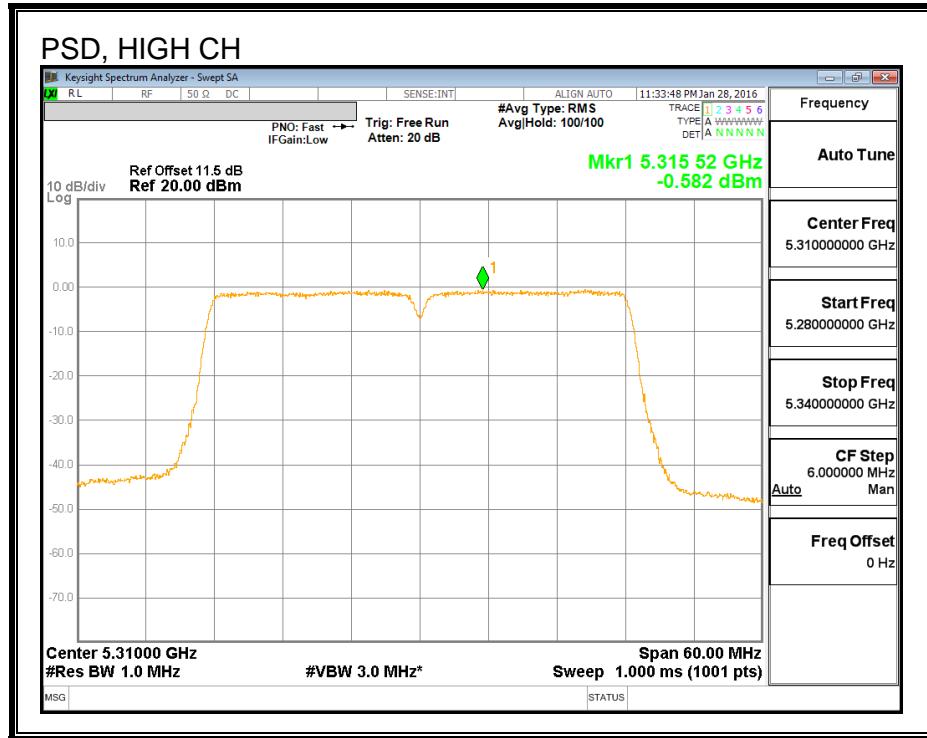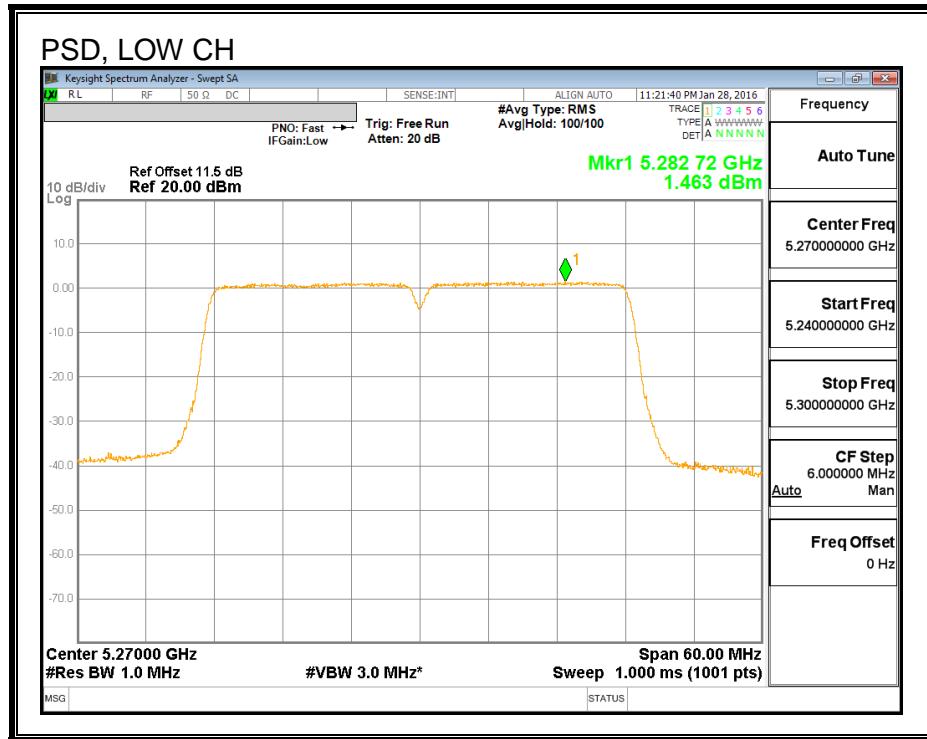

8.49. 802.11n HT40 ANTENNA A+C CDD MODE IN THE 5.3 GHz BAND

8.49.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna C (MHz)
Low	5270	40.44	40.08
High	5310	40.38	40.02

26 DB BANDWIDTH, ANTENNA - A

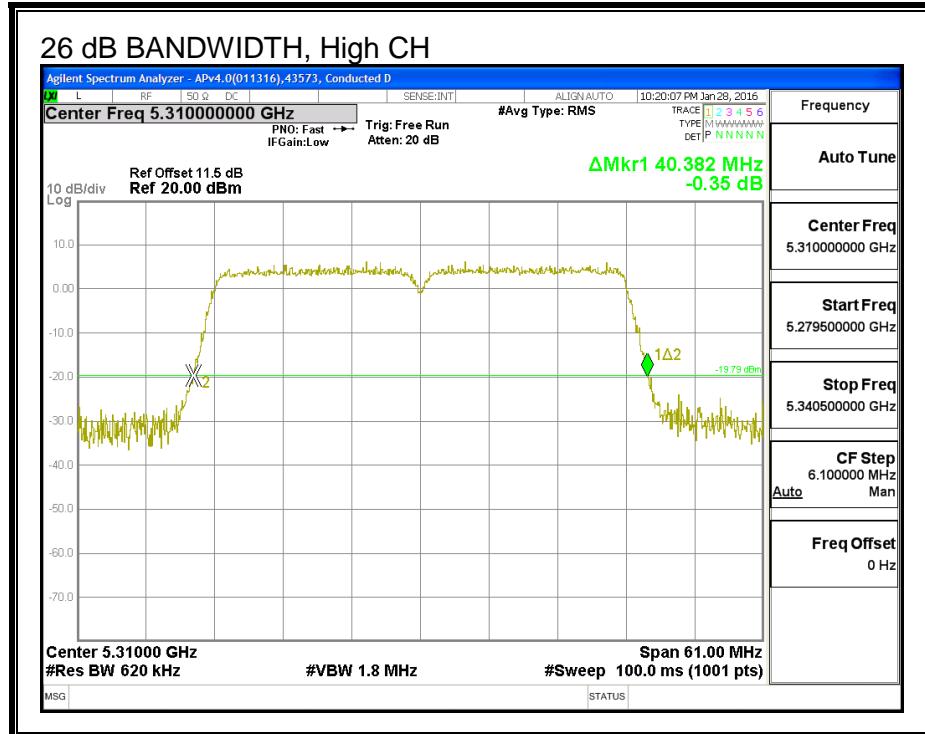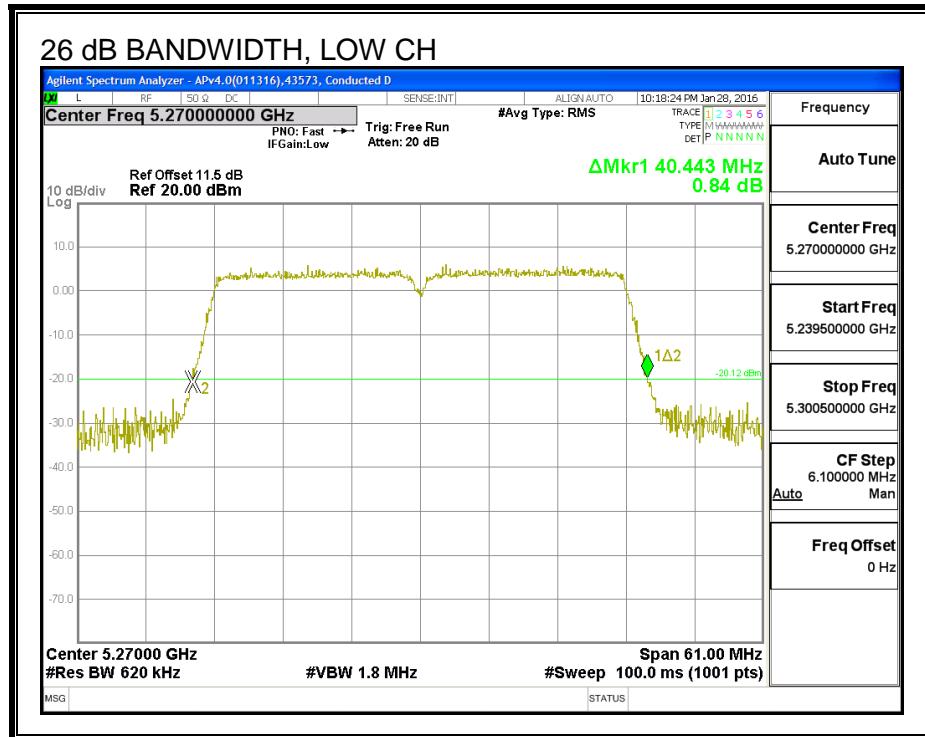

26 DB BANDWIDTH, ANTENNA - C

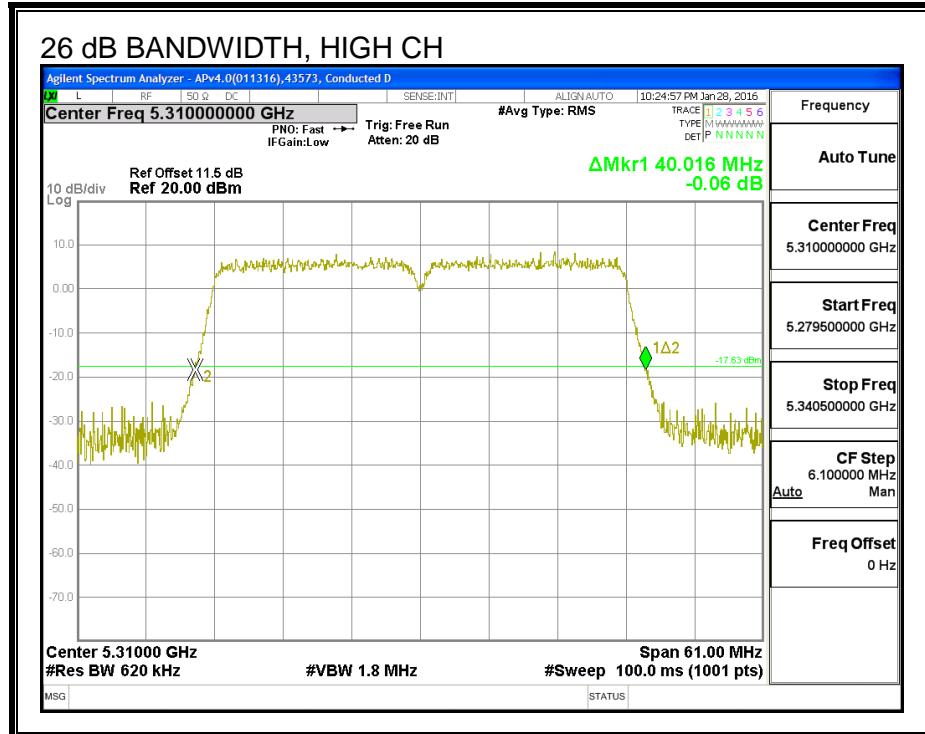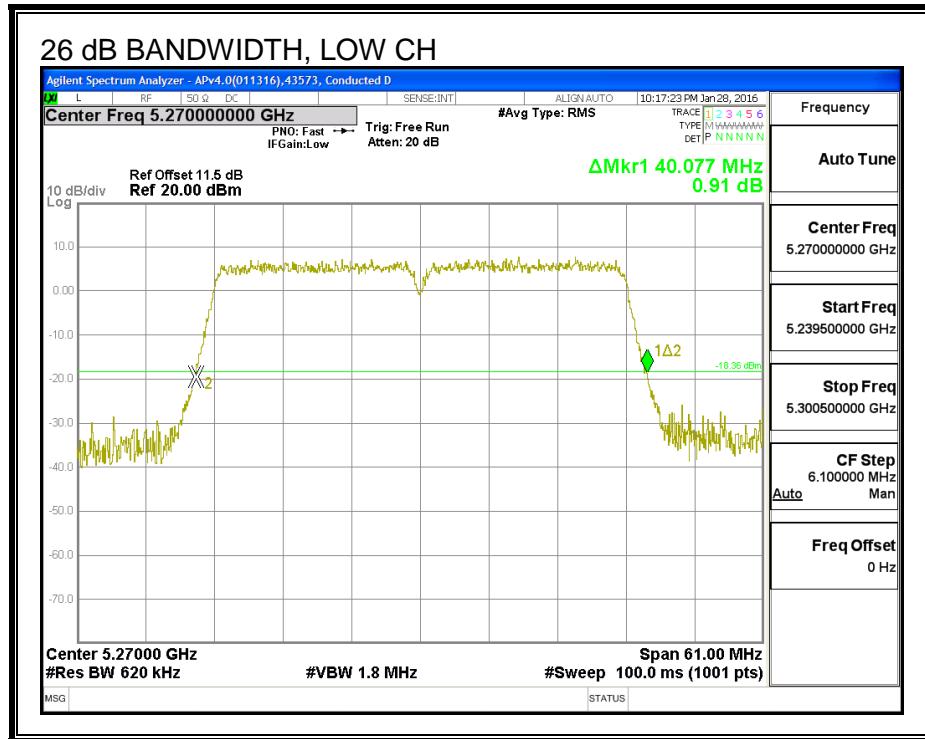

8.49.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna C (MHz)
Low	5270	36.407	36.142
High	5310	36.327	36.406

99% BANDWIDTH, ANTENNA - A

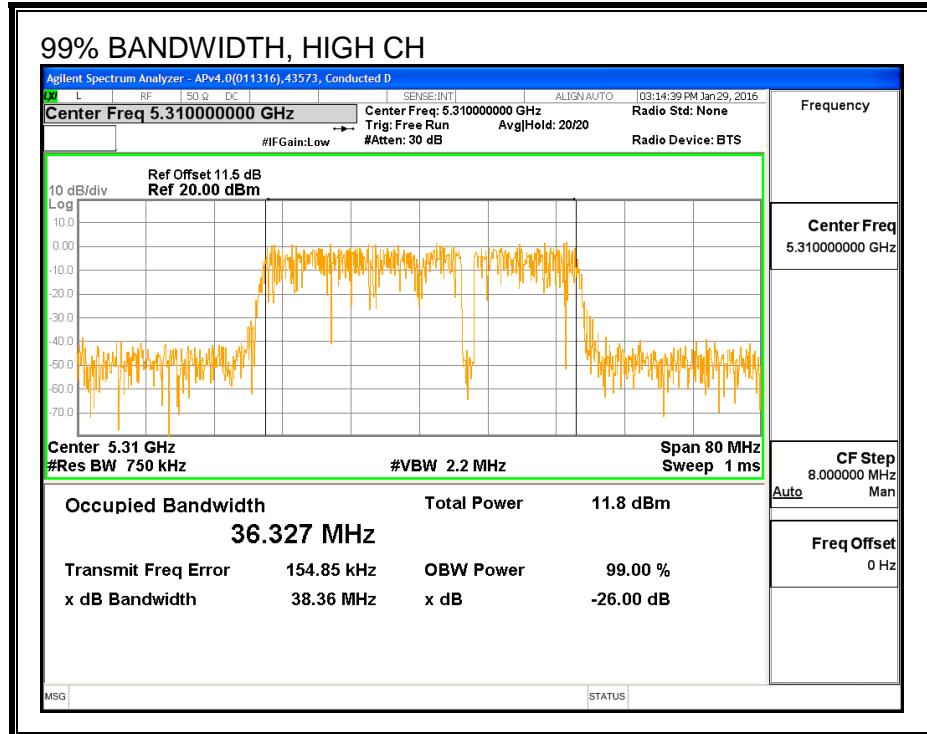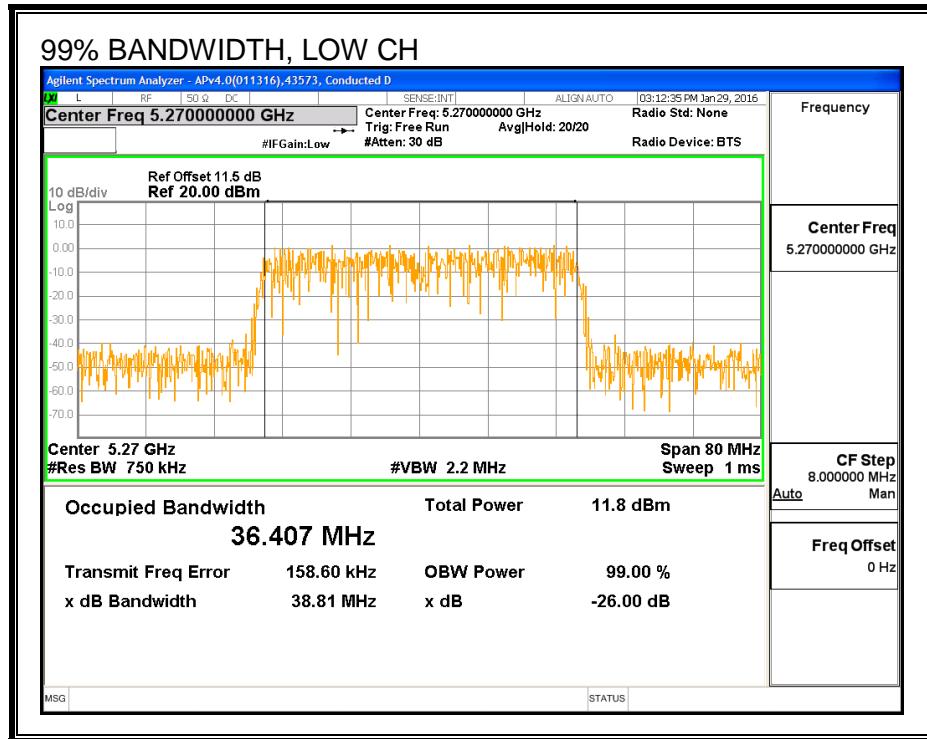

99% BANDWIDTH, ANTENNA - C

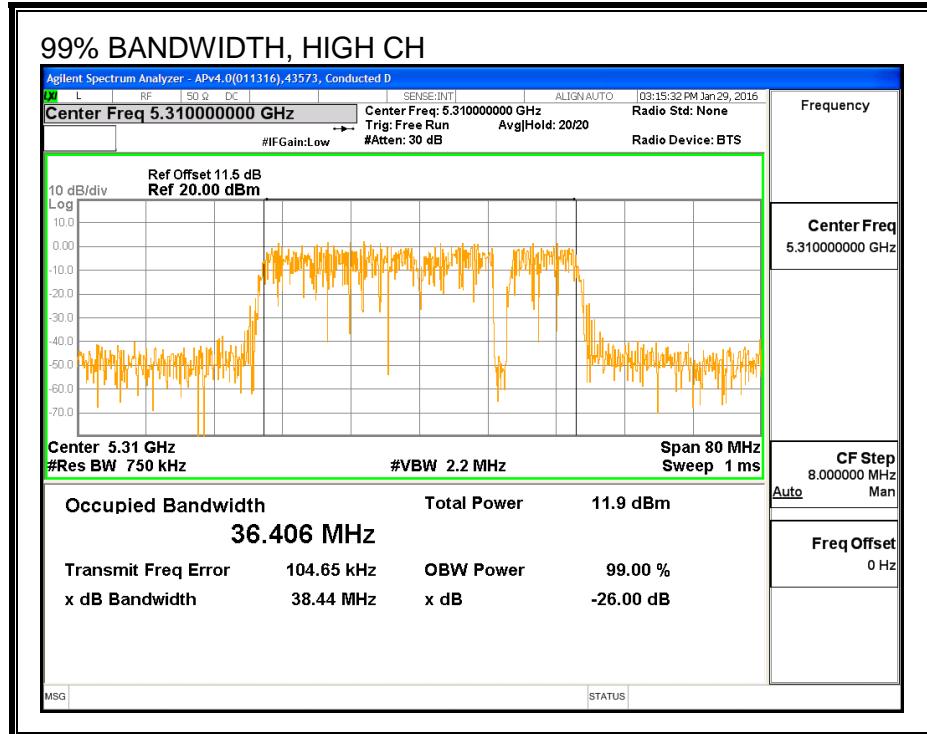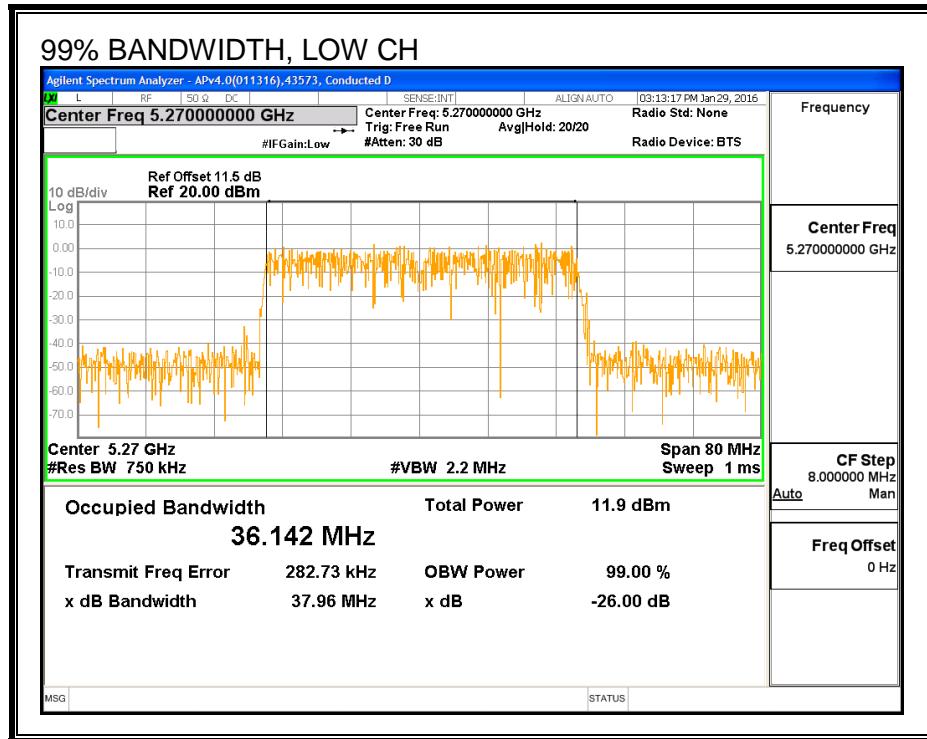

8.49.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Antenna A Power (dBm)	Antenna C Power (dBm)	Total Power (dBm)
Low	5270	15.98	15.41	18.71
High	5310	13.88	13.91	16.91

8.49.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A	Antenna C	Uncorrelated Chains Directional Gain (dBi)
Gain (dBi)	Gain (dBi)	Gain (dBi)
2.23	2.12	2.18

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A	Antenna C	Correlated Chains Directional Gain (dBi)
Gain (dBi)	Gain (dBi)	Gain (dBi)
2.23	2.12	5.19

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.44	36.407	2.18	5.19	24.00	11.00
High	5310	40.38	36.406	2.18	5.19	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna C Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.98	15.41	18.71	24.00	-5.29
High	5310	13.88	13.91	16.91	24.00	-7.09



PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna C Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	1.61	0.99	4.32	11.00	-6.68
High	5310	-0.54	-0.70	2.39	11.00	-8.61

PSD, ANTENNA - A

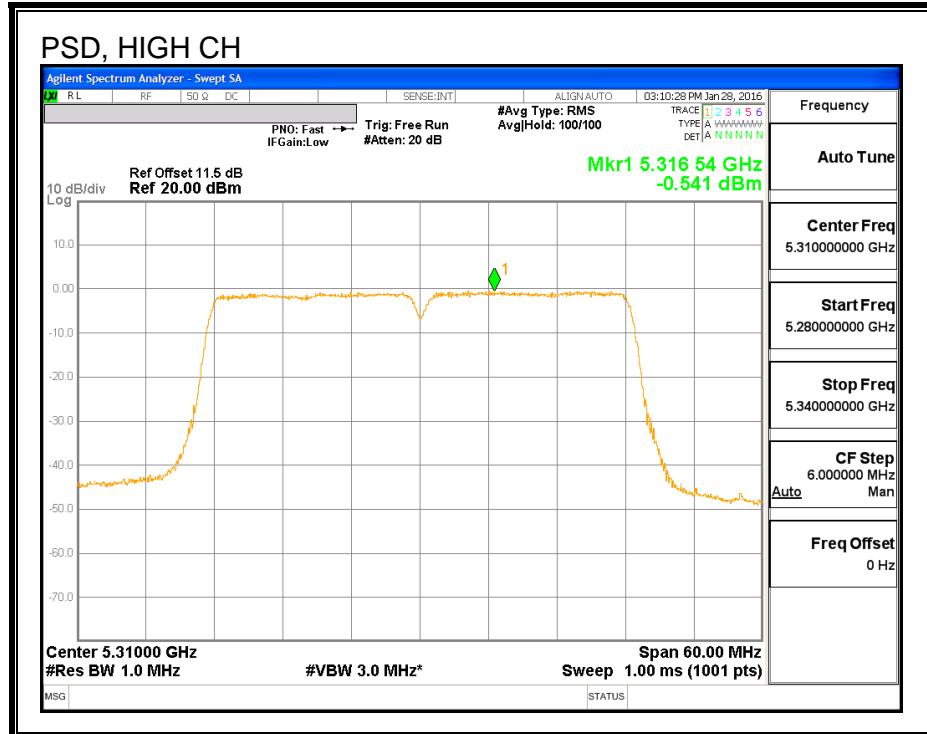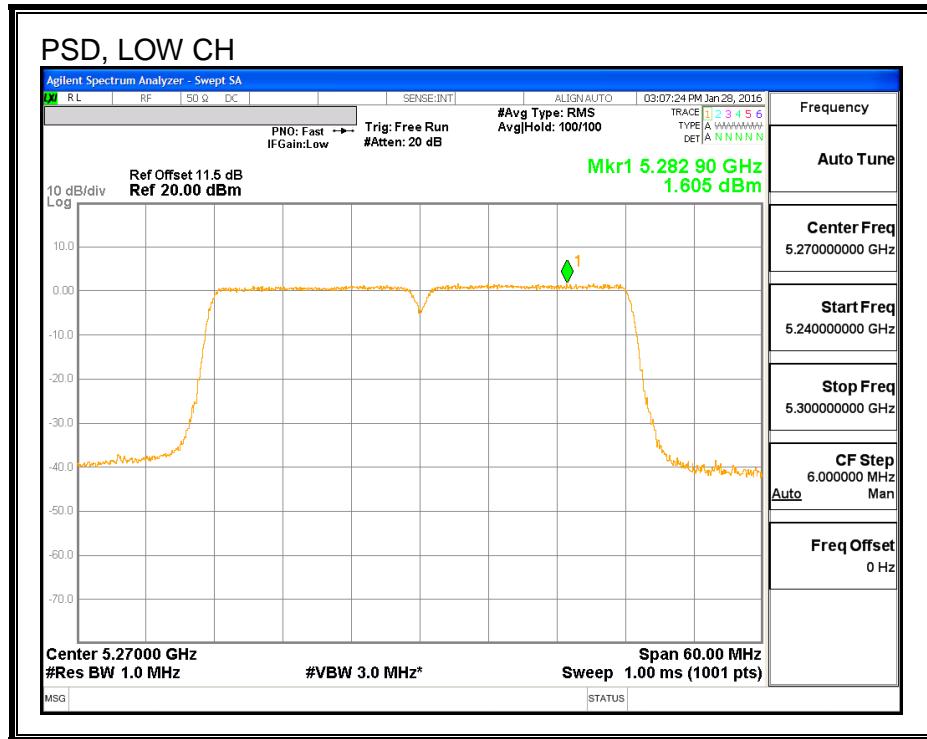

PSD, ANTENNA - C

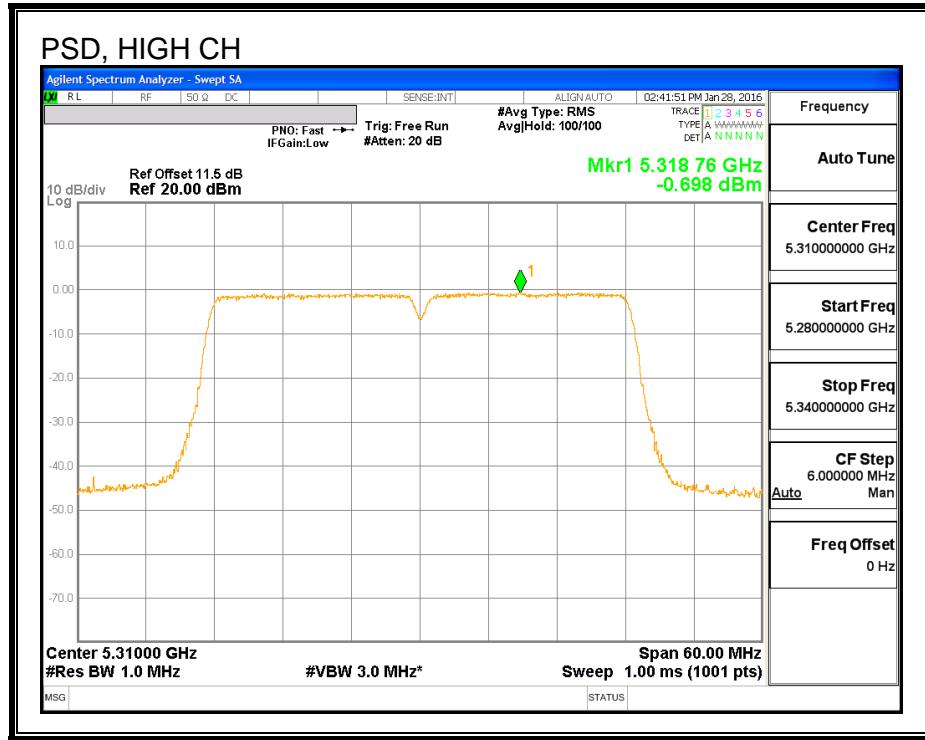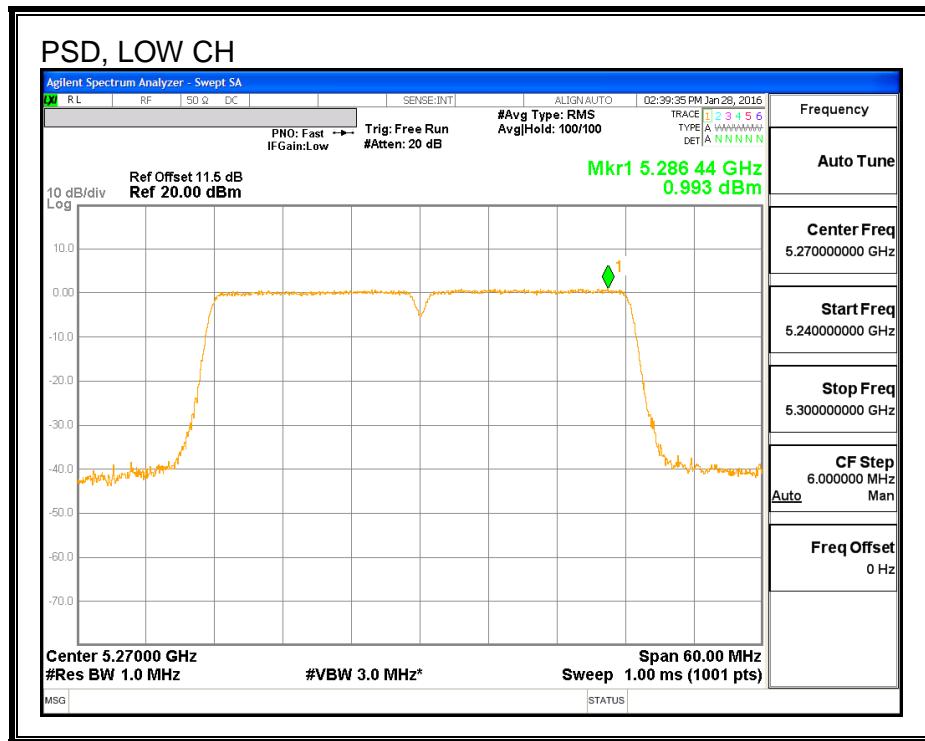

8.50. 802.11n HT40 ANTENNA B+A STBC MODE IN THE 5.3 GHz BAND

8.50.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna B (MHz)	26 dB BW Antenna A (MHz)
Low	5270	40.57	40.08
High	5310	40.32	40.14

26 DB BANDWIDTH, ANTENNA - B

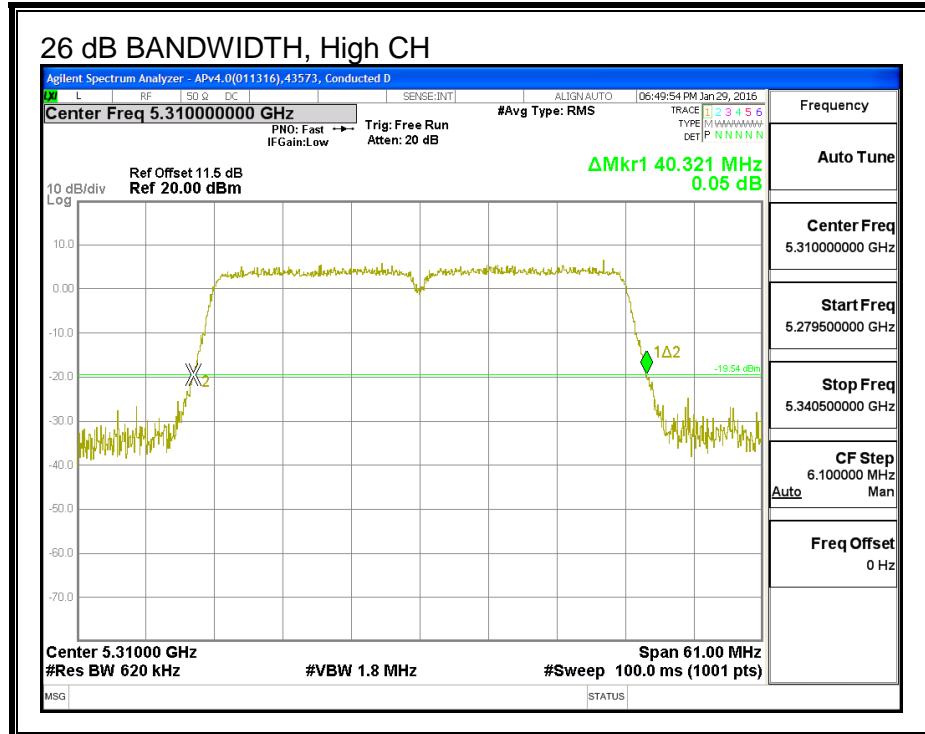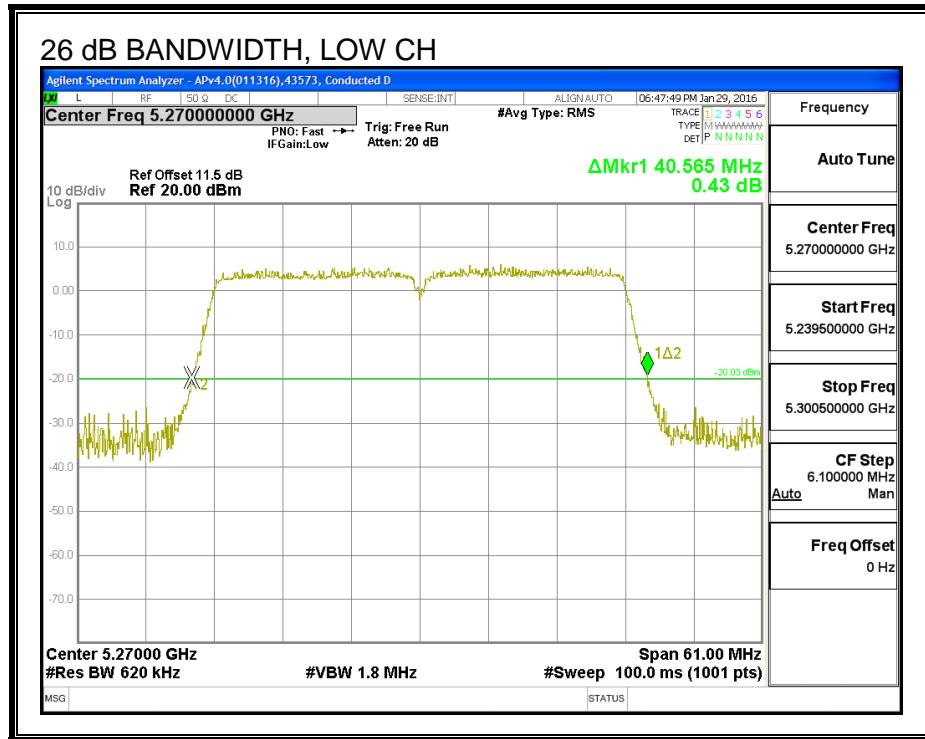

26 DB BANDWIDTH, ANTENNA - A

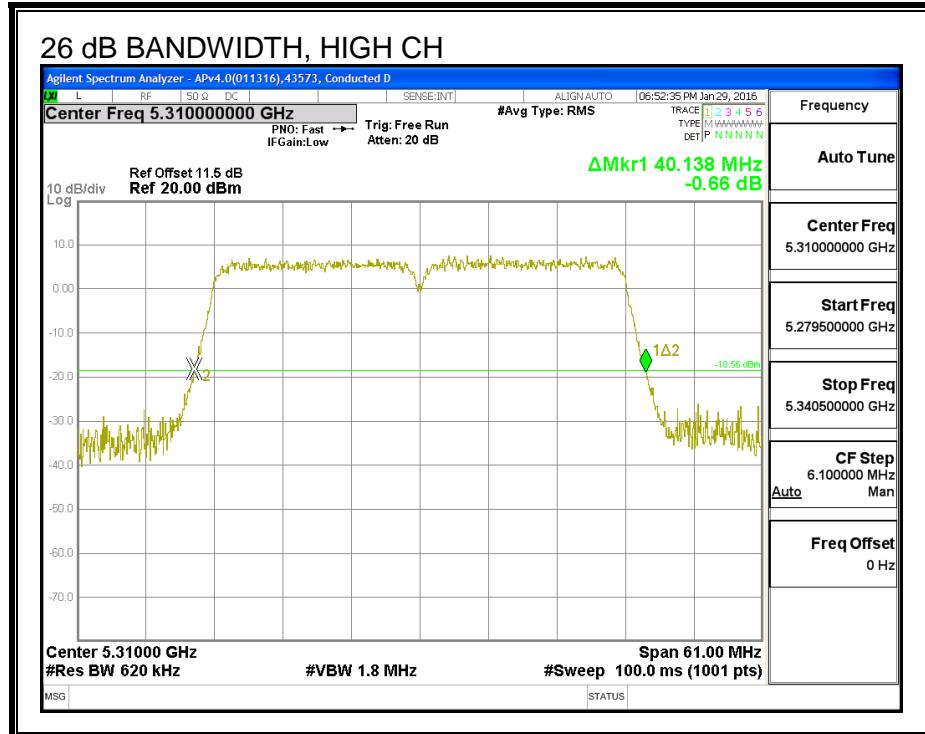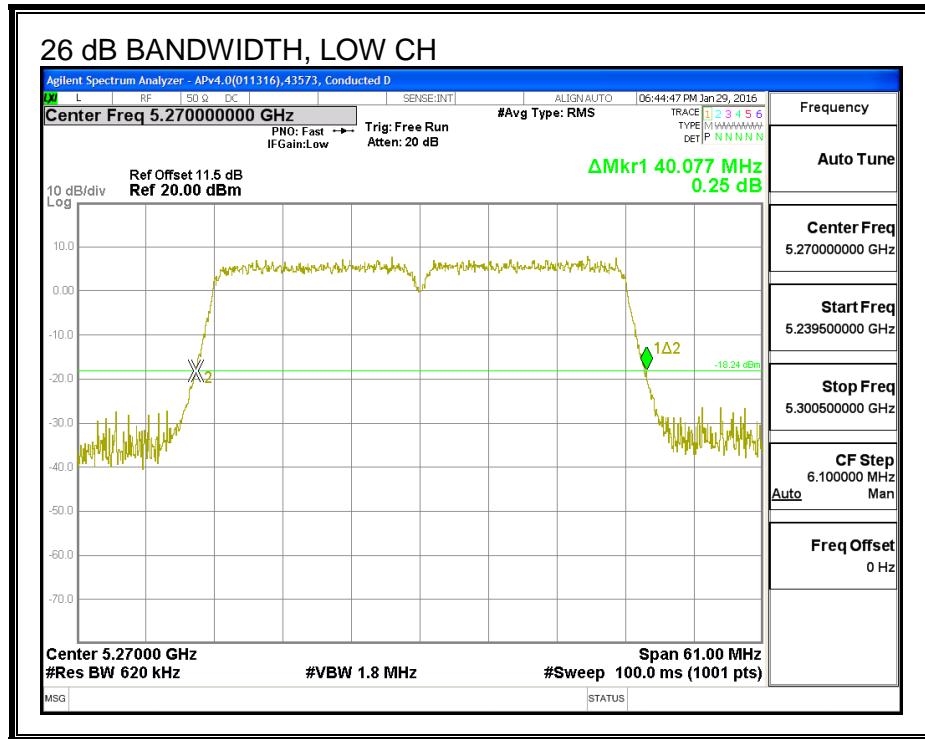

8.50.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Antenna B (MHz)	99% BW Antenna A (MHz)
Low	5270	36.472	36.332
High	5310	36.551	36.525

99% BANDWIDTH, ANTENNA - B

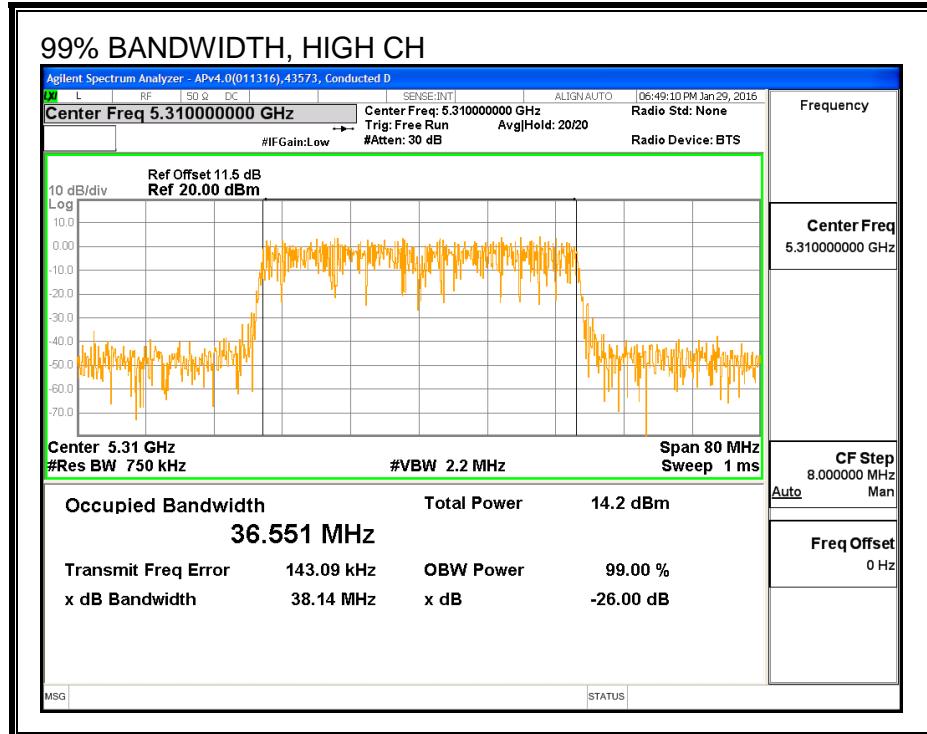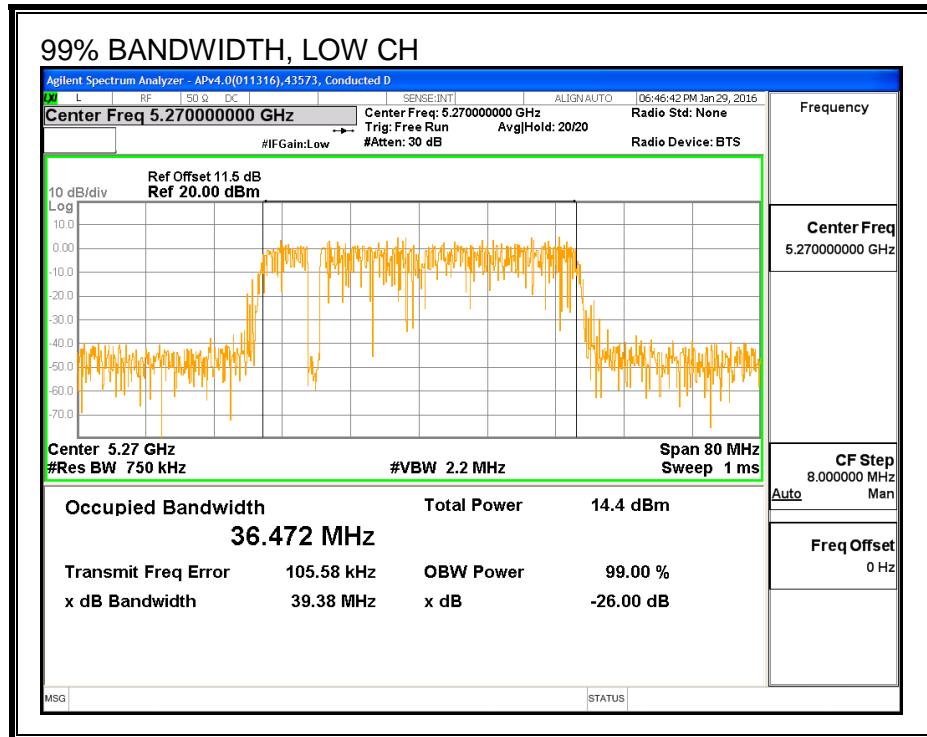

99% BANDWIDTH, ANTENNA - A

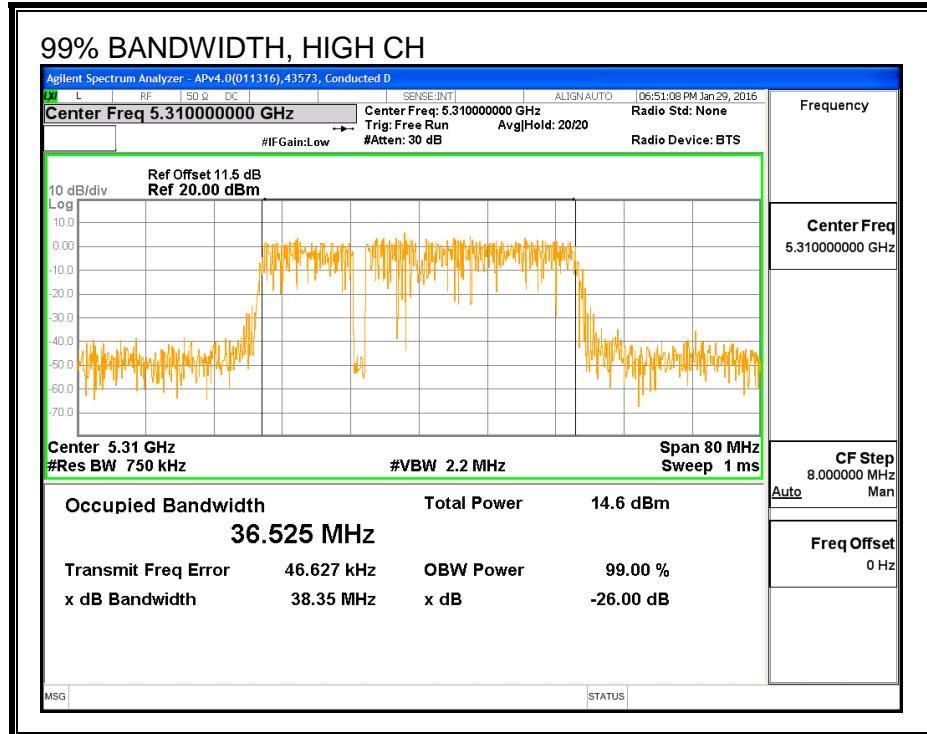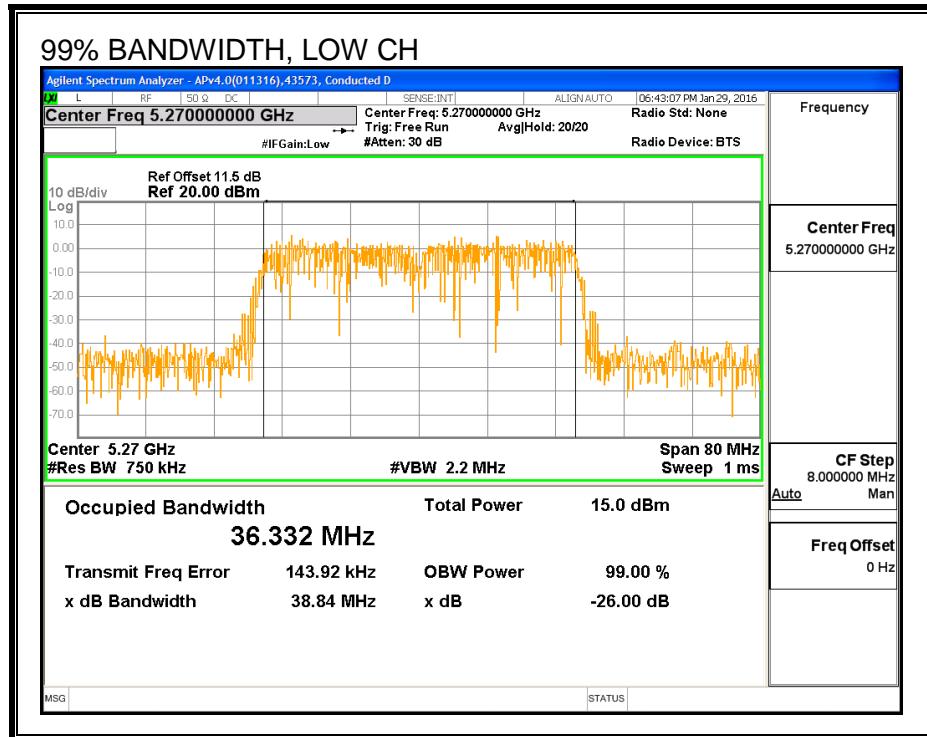

8.50.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Antenna B Power (dBm)	Antenna A Power (dBm)	Total Power (dBm)
Low	5270	17.00	16.98	20.00
High	5310	13.95	13.93	16.95

8.50.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna B	Antenna A	Uncorrelated Chains Directional Gain (dBi)
Gain (dBi)	Gain (dBi)	Gain (dBi)
3.02	2.23	2.64

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.57	36.472	2.64	2.64	24.00	11.00
High	5310	40.32	36.551	2.64	2.64	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	17.00	16.98	20.00	24.00	-4.00
High	5310	13.95	13.93	16.95	24.00	-7.05



PSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	2.67	2.60	5.64	11.00	-5.36
High	5310	-0.46	-0.36	2.60	11.00	-8.40

PSD, ANTENNA - B

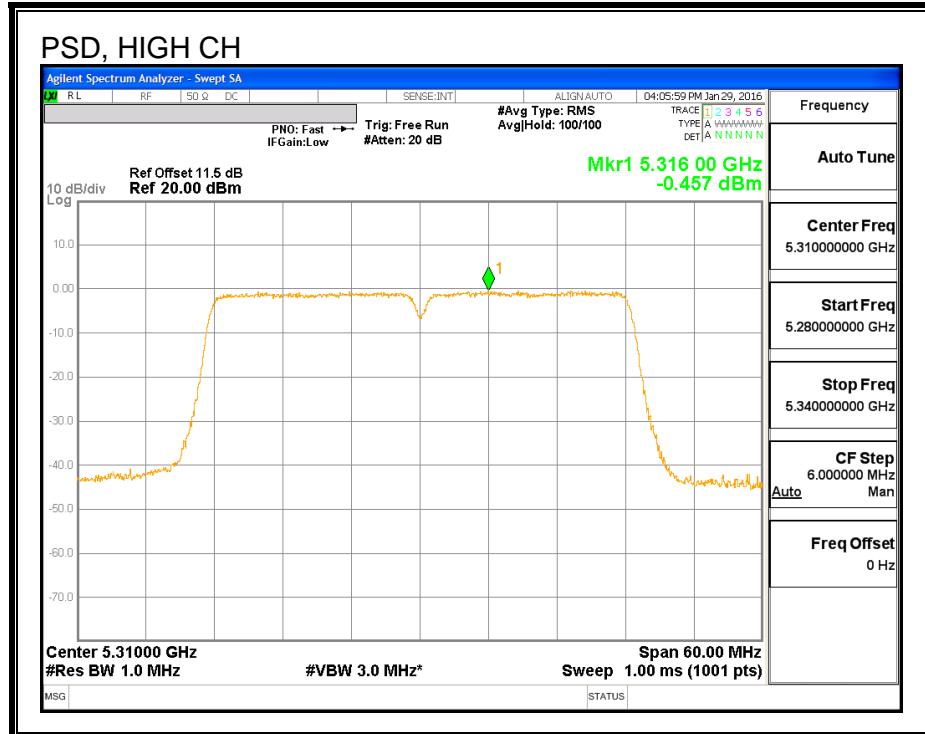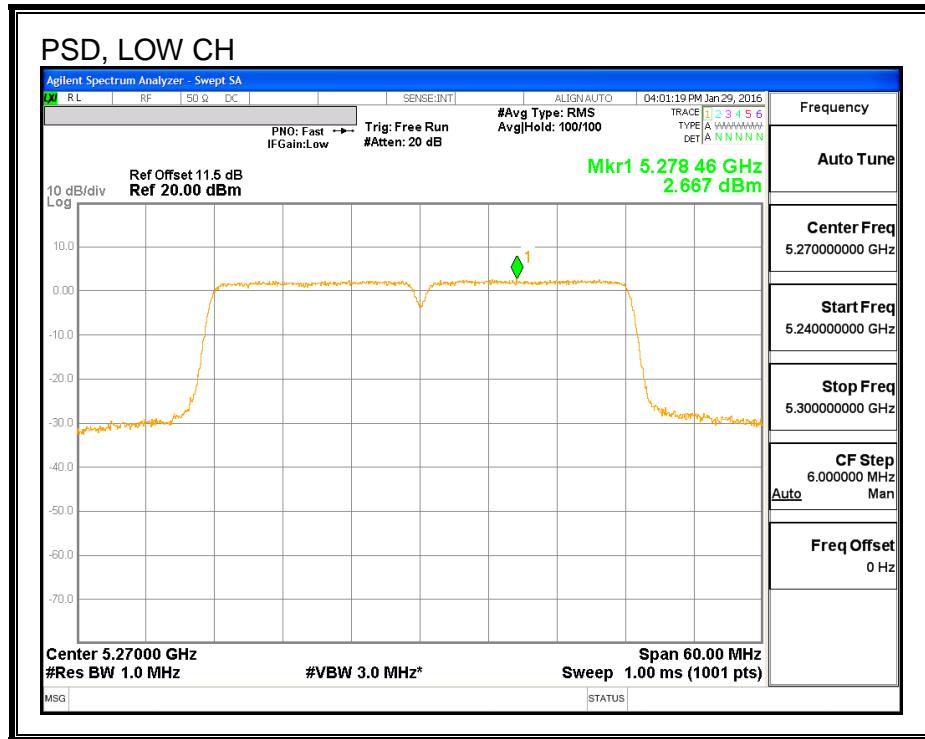

PSD, ANTENNA - A

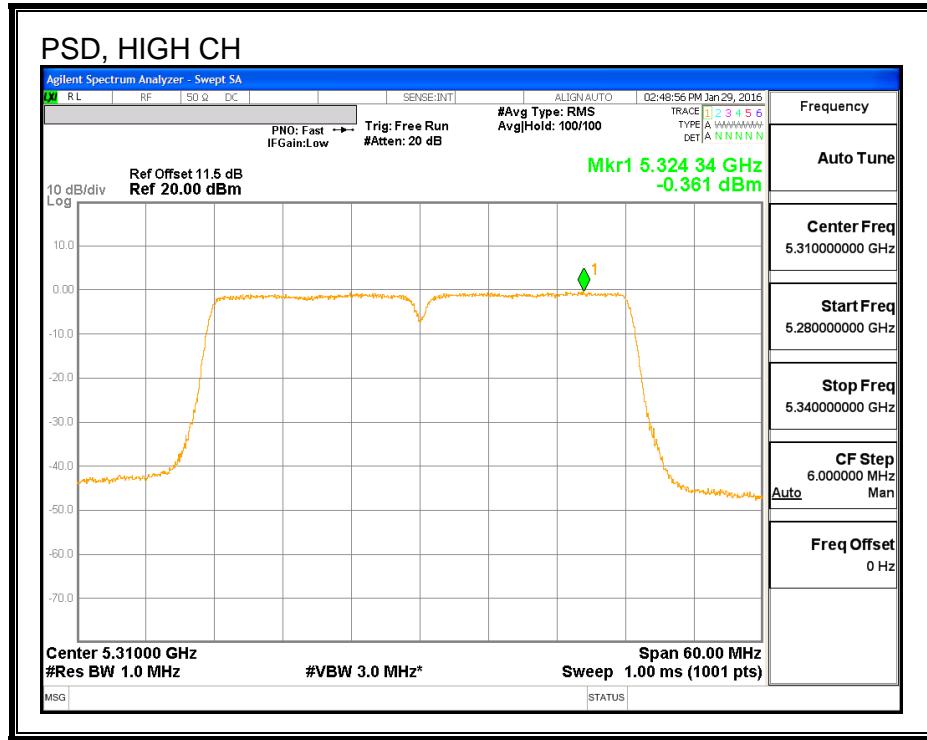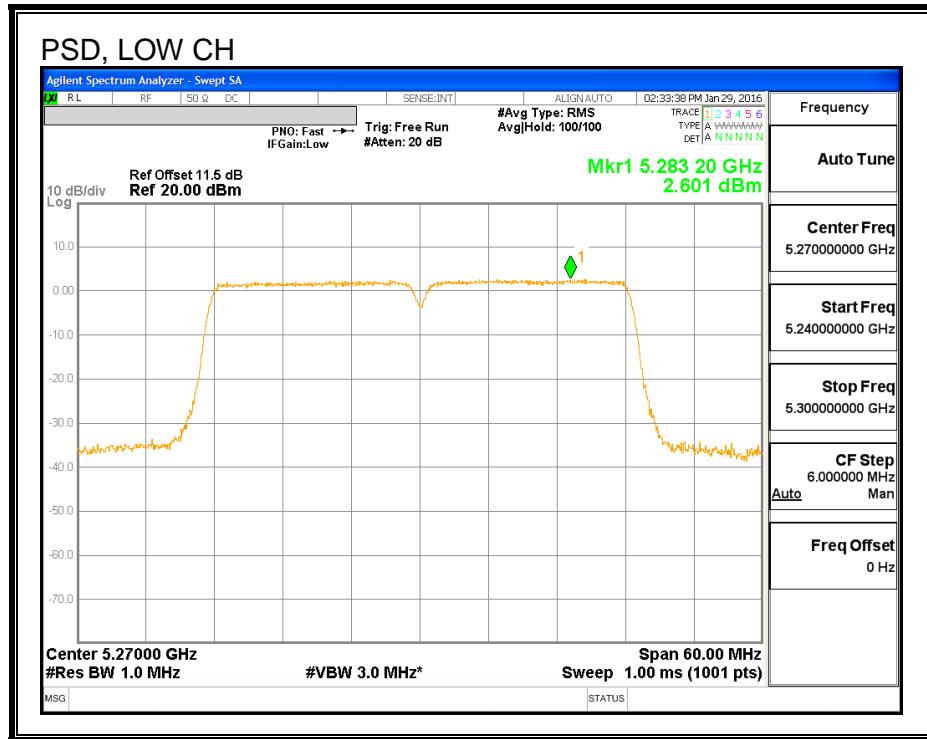

8.51. 802.11n HT40 ANTENNA A+C STBC MODE IN THE 5.3 GHz BAND

8.51.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna C (MHz)
Low	5270	40.44	40.08
High	5310	40.57	40.08

26 DB BANDWIDTH, ANTENNA - A

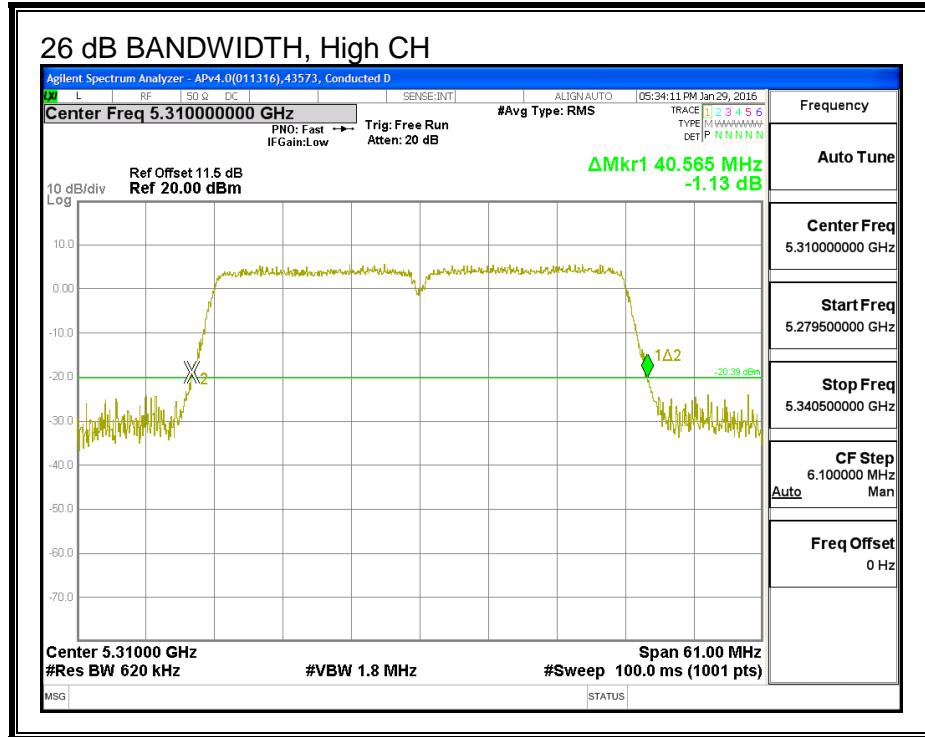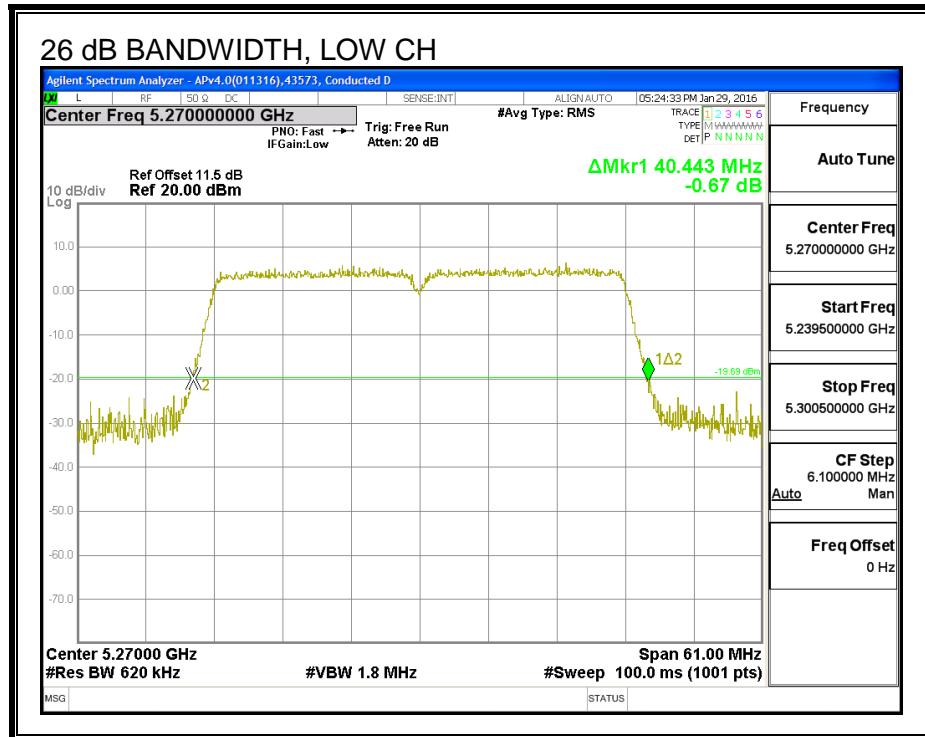

26 DB BANDWIDTH, ANTENNA - C

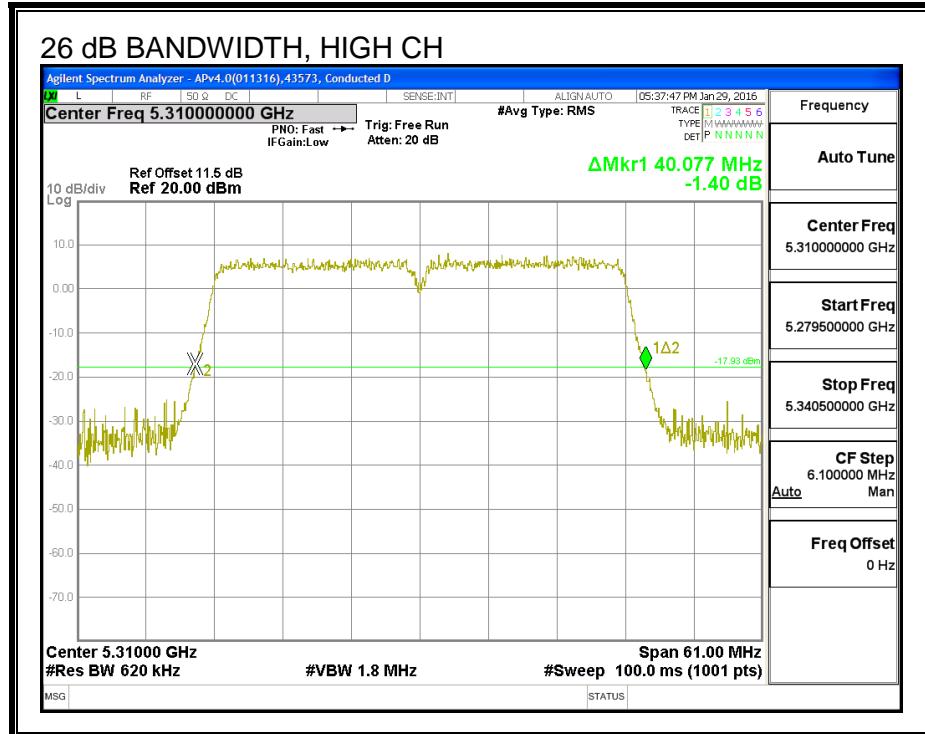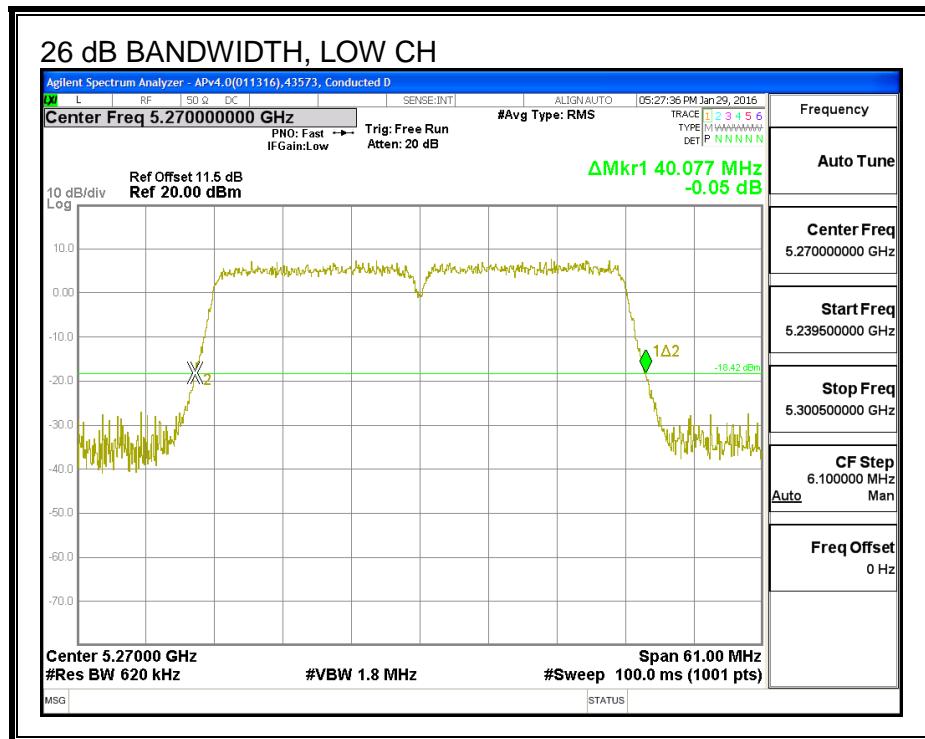

8.51.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna C (MHz)
Low	5270	36.296	36.294
High	5310	36.467	36.615

99% BANDWIDTH, ANTENNA - A

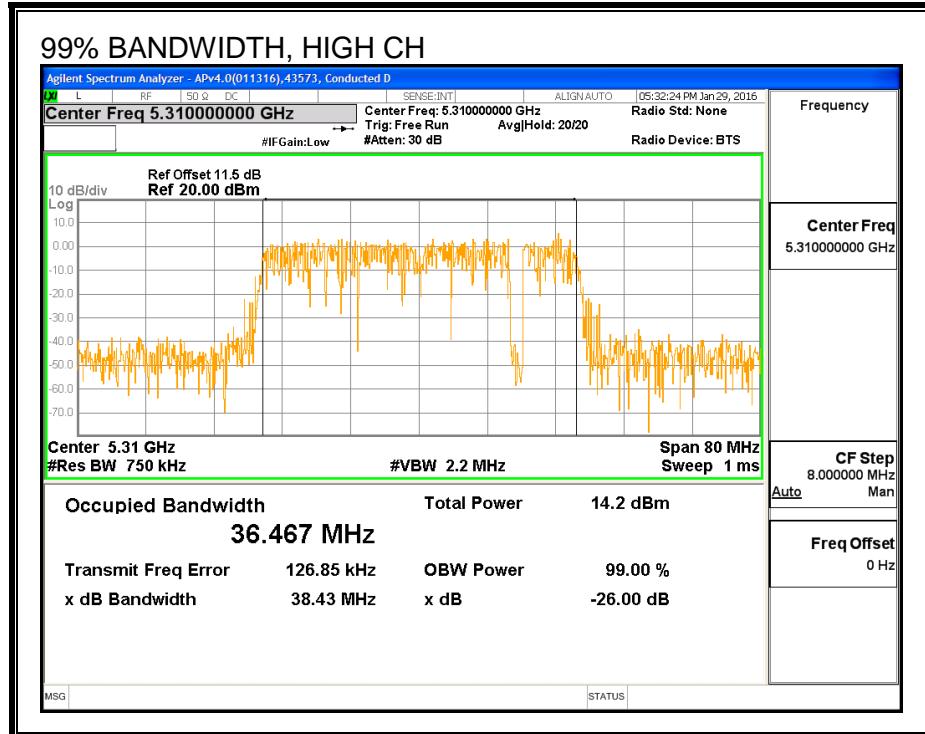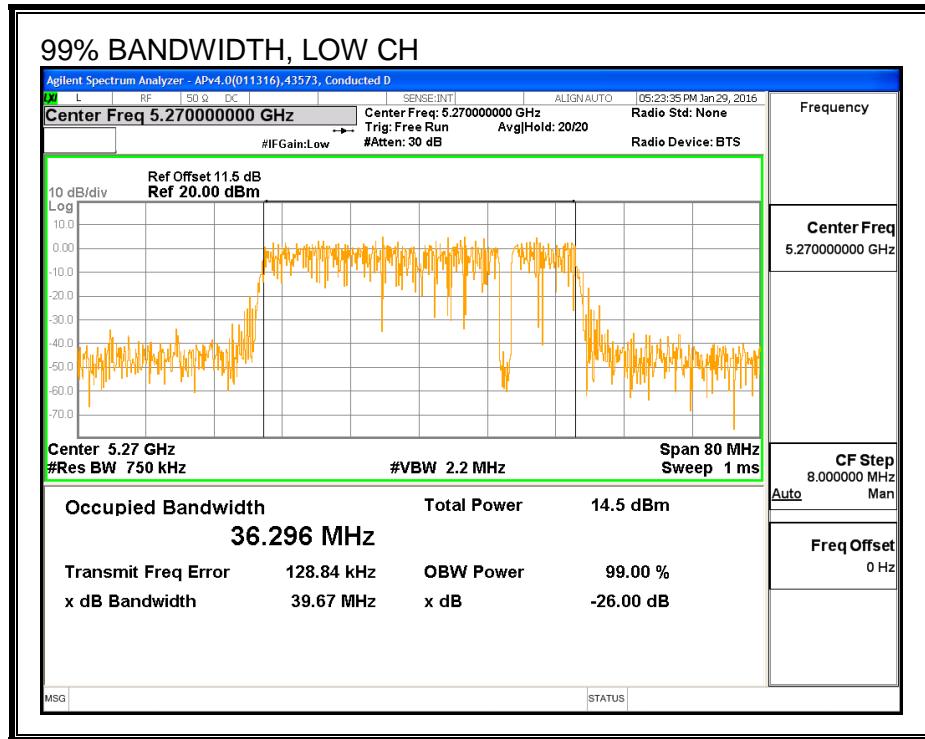

99% BANDWIDTH, ANTENNA - C

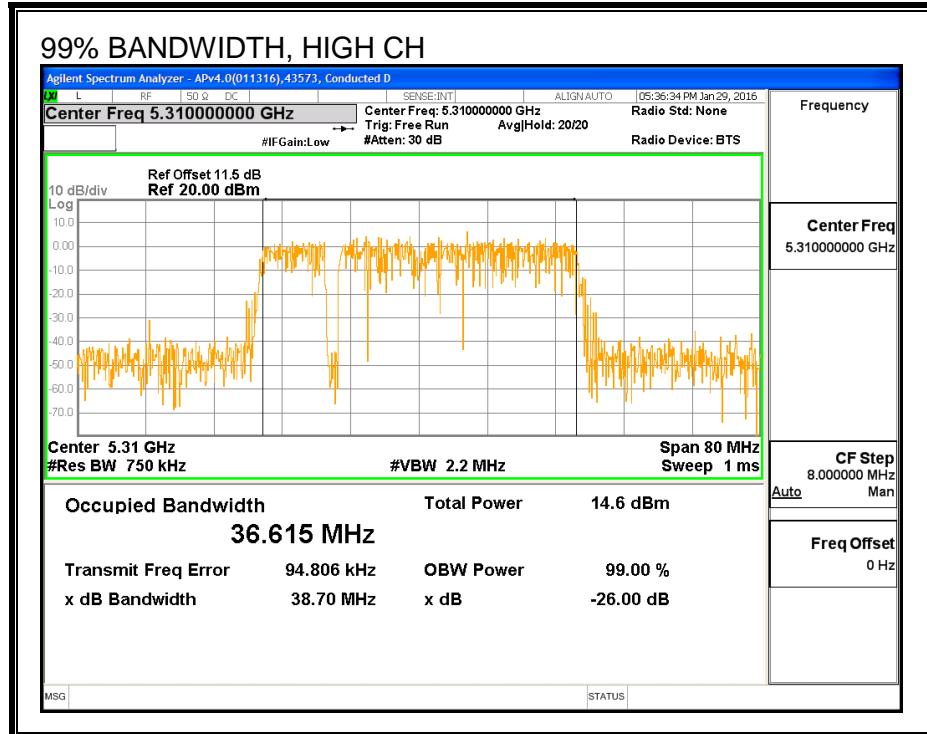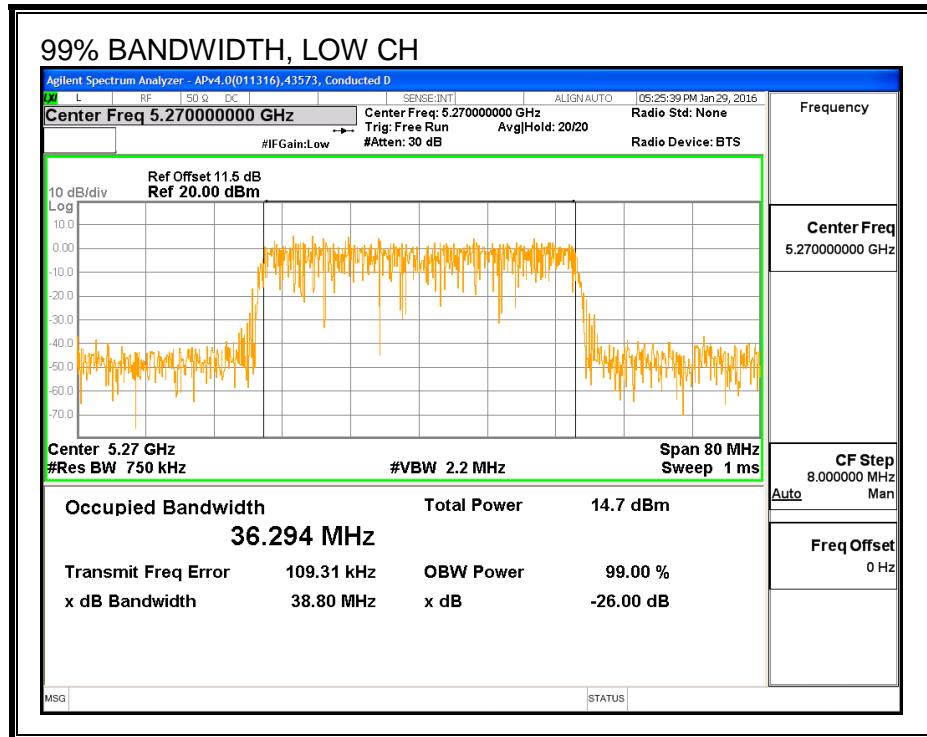

8.51.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Antenna A Power (dBm)	Antenna C Power (dBm)	Total Power (dBm)
Low	5270	17.00	15.33	19.26
High	5310	13.82	13.86	16.85

8.51.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A	Antenna C	Uncorrelated Chains Directional Gain (dBi)
Gain (dBi)	Gain (dBi)	Gain (dBi)
2.23	2.12	2.18

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.44	36.296	2.18	2.18	24.00	11.00
High	5310	40.57	36.615	2.18	2.18	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna C Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	17.00	15.33	19.26	24.00	-4.74
High	5310	13.82	13.86	16.85	24.00	-7.15



PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna C Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	2.54	0.89	4.80	11.00	-6.20
High	5310	-0.65	-0.62	2.38	11.00	-8.62

PSD, ANTENNA - A

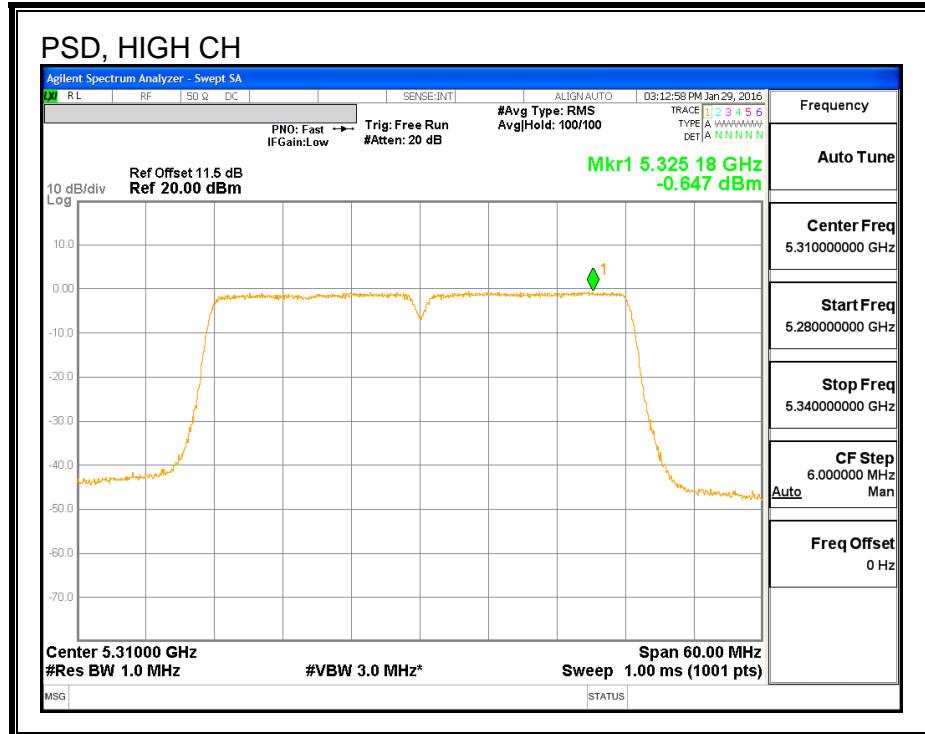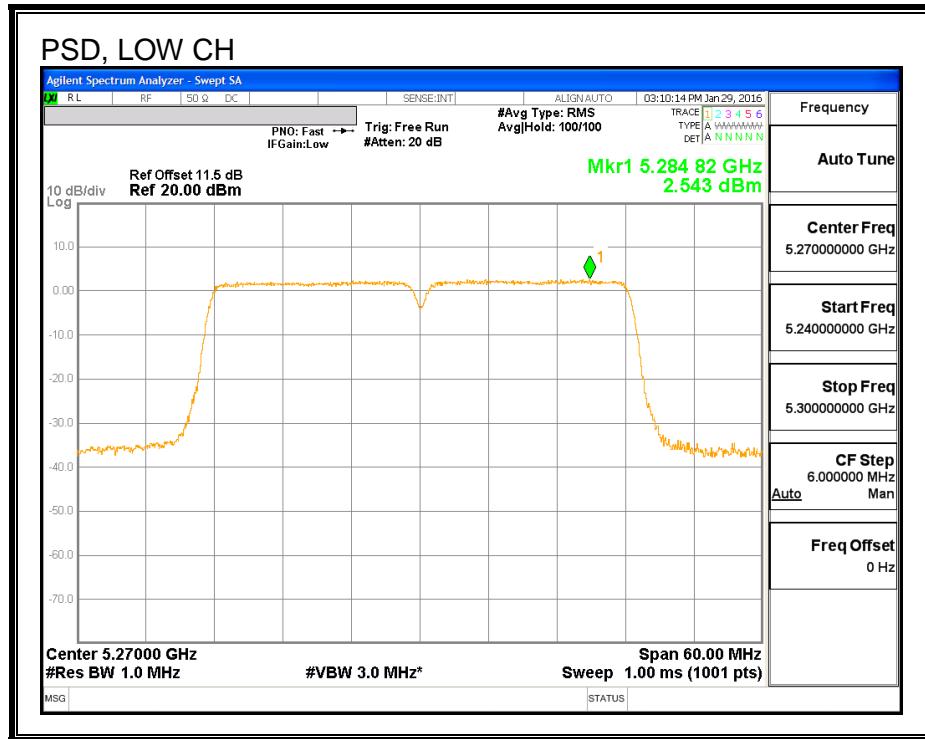

PSD, ANTENNA - C

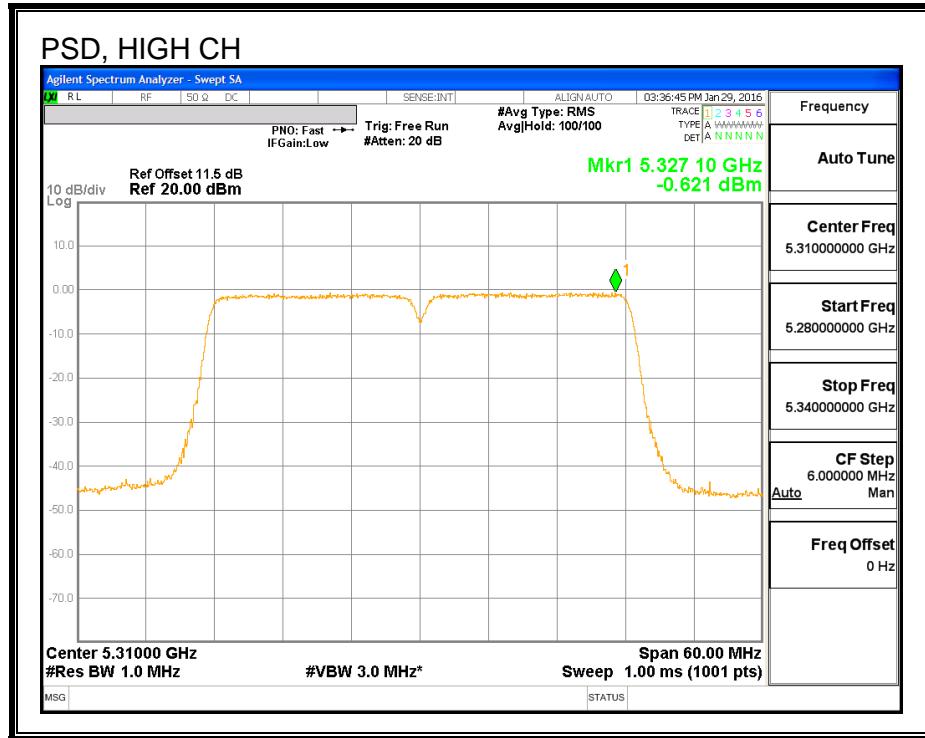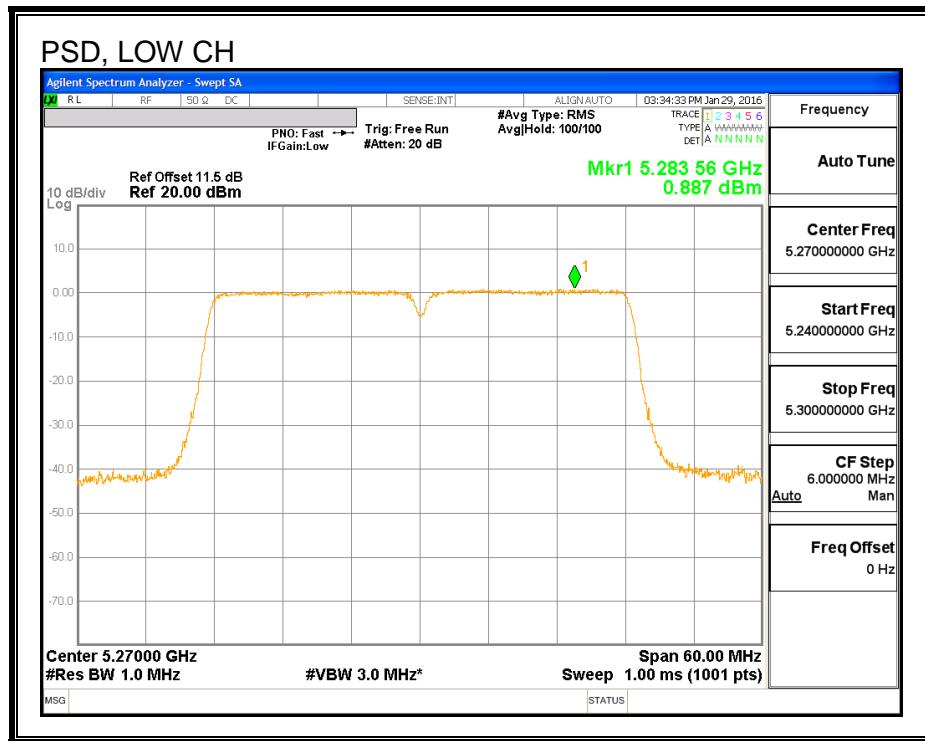

8.52. 802.11n HT40 ANTENNA B+A SDM MODE IN THE 5.3 GHz BAND

Noted: Covered by 802.11n HT40 ANTENNA B+A STBC MODE IN THE 5.3 GHz BAND

8.53. 802.11n HT40 ANTENNA A+C SDM MODE IN THE 5.3 GHz BAND

Noted: Covered by 802.11n HT40 ANTENNA A+C STBC MODE IN THE 5.3 GHz BAND

8.54. 802.11ac VHT80 ANTENNA - B MODE IN THE 5.3 GHz BAND

8.54.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5290	82.56

26 dB BANDWIDTH

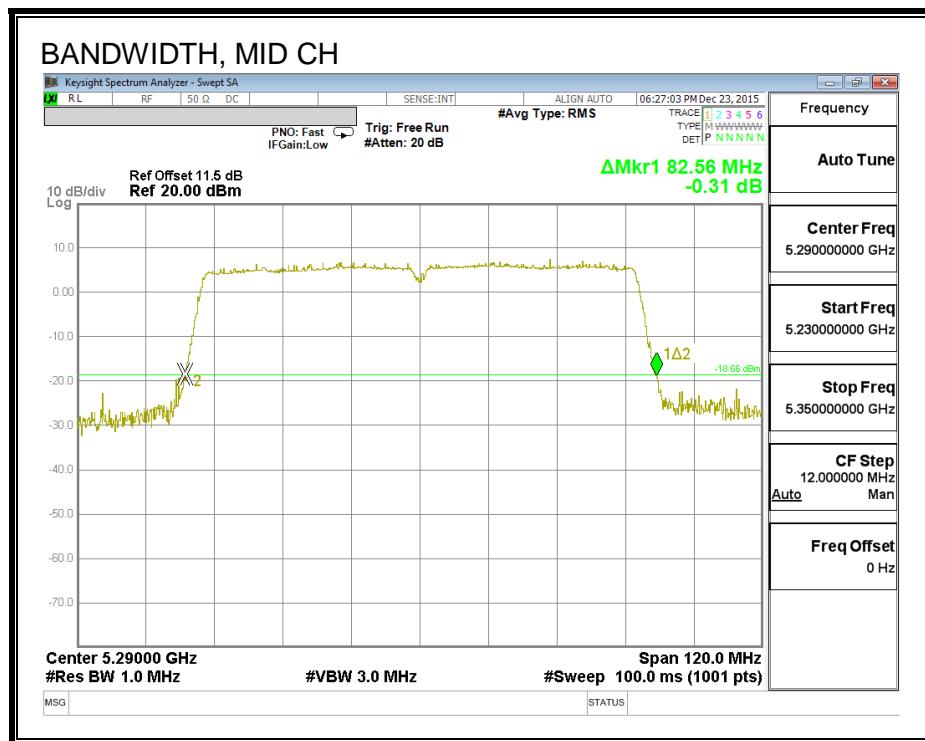

8.54.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5290	75.623

99% BANDWIDTH

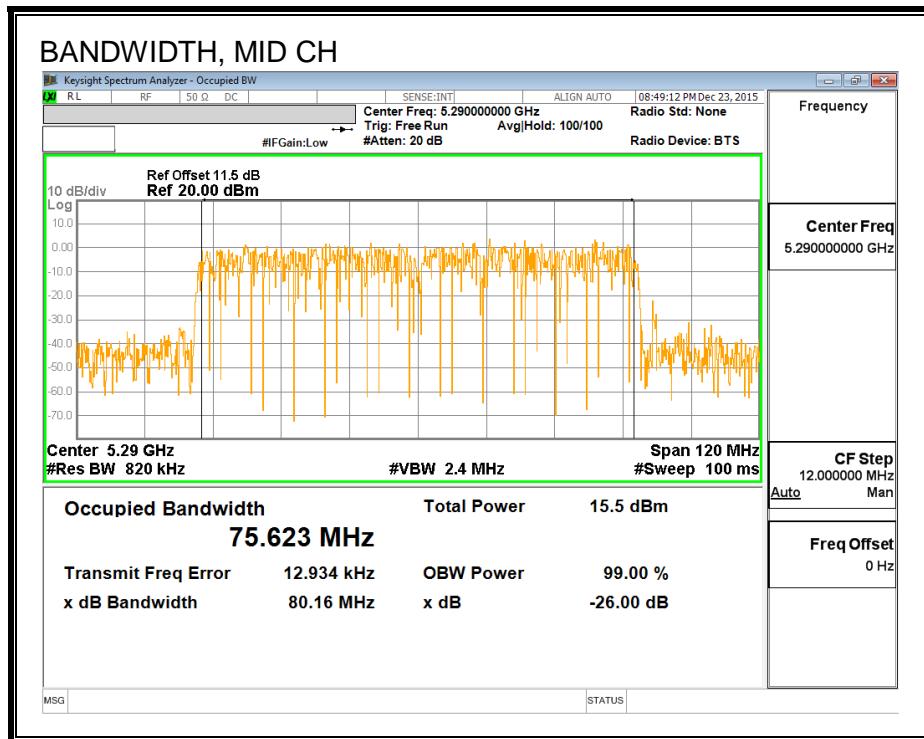

8.54.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5290	13.46

8.54.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	82.56	75.623	3.02	24.00	11.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	13.46	13.46	24.00	-10.54

PPSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	-3.90	-3.74	11.00	-14.74

PSD

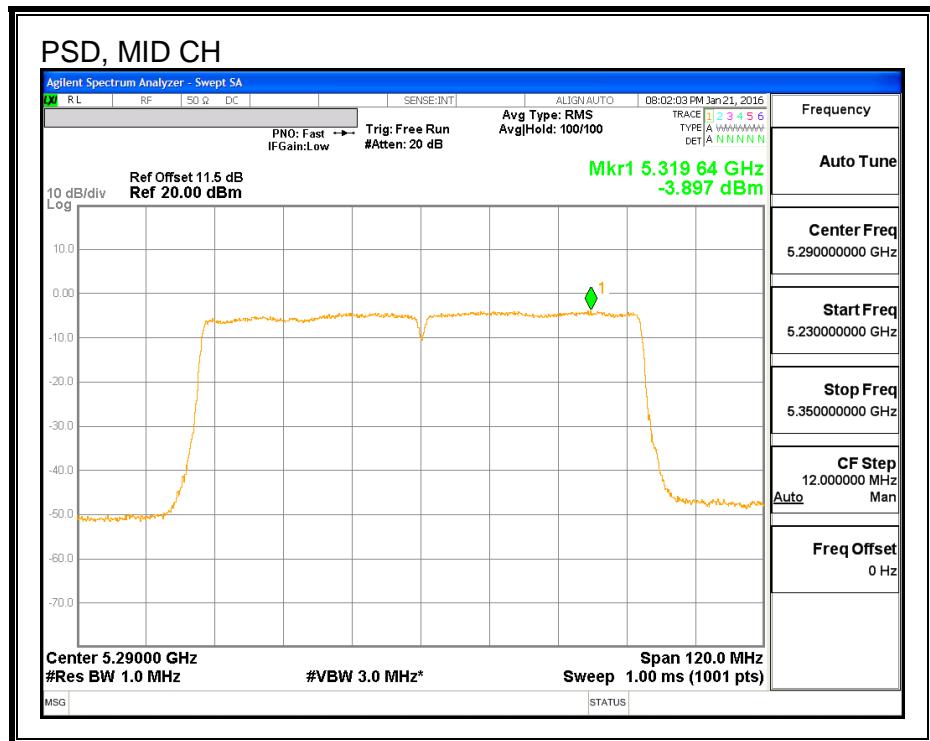

8.55. 802.11ac VHT80 ANTENNA - A MODE IN THE 5.3 GHz BAND

8.55.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5290	83.40

26 dB BANDWIDTH

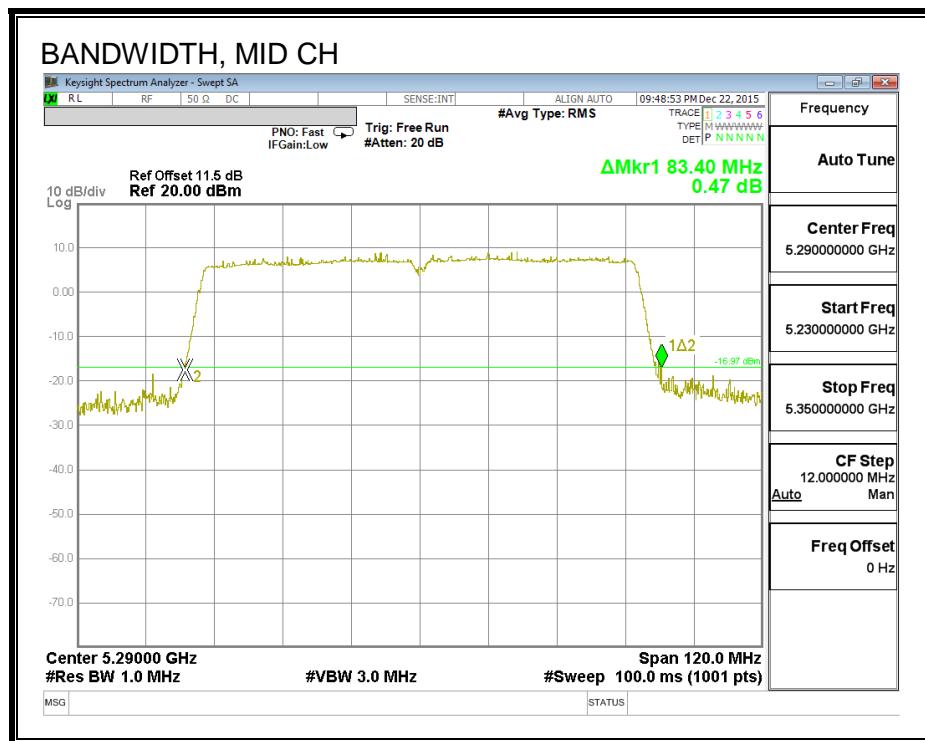

8.55.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5290	75.616

99% BANDWIDTH

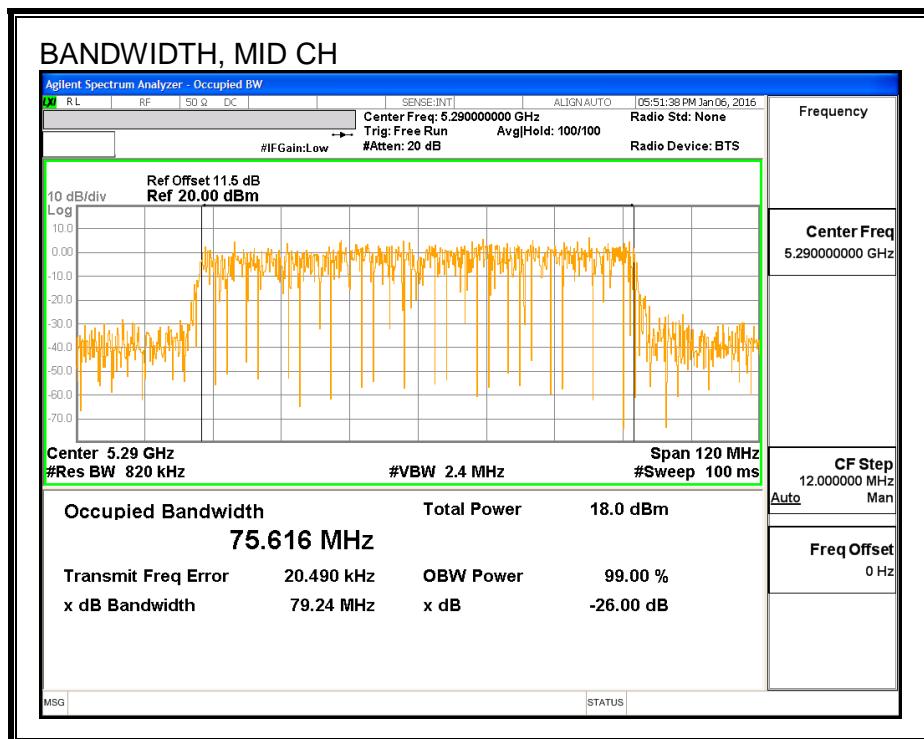

8.55.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5290	13.50

8.55.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	83.40	75.616	2.23	24.00	11.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	13.50	13.50	24.00	-10.50

PPSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	-3.85	-3.69	11.00	-14.69

PSD

