



CERTIFICATION TEST REPORT

Report Number. : 16U23818-E4V5

Applicant : APPLE, INC
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Model : A1709, A1852

FCC ID : BCGA1709

EUT Description : TABLET DEVICE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:
March 06, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	02/03/2017	Initial Issue	Chin Pang
V2	02/16/2017	Updated antenna names	Tina Chu
V3	02/17/2017	Add Model Number	Chin Pang
V4	03/02/2017	Address TCB's Questions	Chin Pang
V5	03/06/2017	Address TCB's Questions	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	11
2. TEST METHODOLOGY	12
3. FACILITIES AND ACCREDITATION	12
4. CALIBRATION AND UNCERTAINTY	13
4.1. MEASURING INSTRUMENT CALIBRATION	13
4.2. SAMPLE CALCULATION	13
4.3. MEASUREMENT UNCERTAINTY	13
5. EQUIPMENT UNDER TEST.....	14
5.1. DESCRIPTION OF EUT.....	14
5.2. DESCRIPTION OF MODELS DIFFERENCES	14
5.3. MAXIMUM OUTPUT POWER	14
5.4. DESCRIPTION OF AVAILABLE ANTENNAS.....	17
5.5. SOFTWARE AND FIRMWARE	17
5.6. WORST-CASE CONFIGURATION AND MODE.....	18
5.7. DESCRIPTION OF TEST SETUP	19
6. TEST AND MEASUREMENT EQUIPMENT	25
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	26
7.1. ON TIME AND DUTY CYCLE.....	26
7.2. MEASUREMENT METHODS.....	30
8. ANTENNA PORT TEST RESULTS.....	31
8.1. 802.11n HT20 ANTENNA A MODE IN THE 5.2 GHz BAND.....	31
8.1.1. 26 dB BANDWIDTH	31
8.1.2. 99% BANDWIDTH.....	34
8.1.3. AVERAGE POWER.....	37
8.1.4. OUTPUT POWER AND PSD	38
8.2. 802.11n HT20 ANTENNA B MODE IN THE 5.2 GHz BAND.....	42
8.2.1. 26 dB BANDWIDTH	42
8.2.2. 99% BANDWIDTH.....	45
8.2.3. AVERAGE POWER.....	48
8.2.4. OUTPUT POWER AND PSD	49
8.3. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND.....	53
8.3.1. 26 dB BANDWIDTH	53
8.3.2. 99% BANDWIDTH.....	57
8.3.3. AVERAGE POWER.....	61
8.3.4. OUTPUT POWER AND PSD	62
8.4. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND.....	68
8.4.1. 26 dB BANDWIDTH	68

8.4.2.	99% BANDWIDTH.....	72
8.4.3.	AVERAGE POWER.....	76
8.4.4.	OUTPUT POWER AND PSD	77
8.5.	<i>802.11n HT40 ANTENNA A MODE IN THE 5.2 GHz BAND.....</i>	<i>82</i>
8.5.1.	26 dB BANDWIDTH	82
8.5.2.	99% BANDWIDTH.....	84
8.5.3.	AVERAGE POWER.....	86
8.5.4.	OUTPUT POWER AND PSD	87
8.6.	<i>802.11n HT40 ANTENNA B MODE IN THE 5.2 GHz BAND.....</i>	<i>90</i>
8.6.1.	26 dB BANDWIDTH	90
8.6.2.	99% BANDWIDTH.....	92
8.6.3.	AVERAGE POWER.....	94
8.6.4.	OUTPUT POWER AND PSD	95
8.7.	<i>802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND.....</i>	<i>98</i>
8.7.1.	26 dB BANDWIDTH	98
8.7.2.	99% BANDWIDTH.....	101
8.7.3.	AVERAGE POWER.....	104
8.7.4.	OUTPUT POWER AND PSD	105
8.8.	<i>802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND ...</i>	<i>110</i>
8.9.	<i>802.11ac VHT80 ANTENNA A MODE IN THE 5.2 GHz BAND.....</i>	<i>111</i>
8.9.1.	26 dB BANDWIDTH	111
8.9.2.	99% BANDWIDTH.....	112
8.9.3.	AVERAGE POWER.....	113
8.9.4.	OUTPUT POWER AND PSD	114
8.10.	<i>802.11ac VHT80 ANTENNA B MODE IN THE 5.2 GHz BAND.....</i>	<i>117</i>
8.10.1.	26 dB BANDWIDTH.....	117
8.10.2.	99% BANDWIDTH.....	118
8.10.3.	AVERAGE POWER	119
8.10.4.	OUTPUT POWER AND PSD	120
8.11.	<i>802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND</i> <i>123</i>	
8.11.1.	26 dB BANDWIDTH.....	123
8.11.2.	99% BANDWIDTH.....	125
8.11.3.	AVERAGE POWER.....	127
8.11.4.	OUTPUT POWER AND PSD	128
8.12.	<i>802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND</i> <i>132</i>	
8.13.	<i>802.11n HT20 ANTENNA A MODE IN THE 5.3 GHz BAND</i>	<i>133</i>
8.13.1.	26 dB BANDWIDTH.....	133
8.13.2.	99% BANDWIDTH	136
8.13.3.	AVERAGE POWER	139
8.13.4.	OUTPUT POWER AND PSD	140
8.14.	<i>802.11n HT20 ANTENNA B MODE IN THE 5.3 GHz BAND</i>	<i>144</i>
8.14.1.	26 dB BANDWIDTH.....	144
8.14.2.	99% BANDWIDTH.....	147
8.14.3.	AVERAGE POWER	150
8.14.4.	OUTPUT POWER AND PSD	151
8.15.	<i>802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND .</i>	<i>155</i>

8.15.1.	26 dB BANDWIDTH	155
8.15.2.	99% BANDWIDTH	159
8.15.3.	AVERAGE POWER	163
8.15.4.	OUTPUT POWER AND PSD	164
8.16.	802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND	169
8.17.	802.11n HT40 ANTENNA A MODE IN THE 5.3 GHz BAND	170
8.17.1.	26 dB BANDWIDTH	170
8.17.2.	99% BANDWIDTH	172
8.17.3.	AVERAGE POWER	174
8.17.4.	OUTPUT POWER AND PSD	175
8.18.	802.11n HT40 ANTENNA B MODE IN THE 5.3 GHz BAND	178
8.18.1.	26 dB BANDWIDTH	178
8.18.2.	99% BANDWIDTH	180
8.18.3.	AVERAGE POWER	182
8.18.4.	OUTPUT POWER AND PSD	183
8.19.	802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND .	186
8.19.1.	26 dB BANDWIDTH	186
8.19.2.	99% BANDWIDTH	189
8.19.3.	AVERAGE POWER	192
8.19.4.	OUTPUT POWER AND PSD	193
8.20.	802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND	197
8.21.	802.11ac VHT80 ANTENNA A MODE IN THE 5.3 GHz BAND	198
8.21.1.	26 dB BANDWIDTH	198
8.21.2.	99% BANDWIDTH	199
8.21.3.	AVERAGE POWER	200
8.21.4.	OUTPUT POWER AND PSD	201
8.22.	802.11ac VHT80 ANTENNA B MODE IN THE 5.3 GHz BAND	204
8.22.1.	26 dB BANDWIDTH	204
8.22.2.	99% BANDWIDTH	205
8.22.3.	AVERAGE POWER	206
8.22.4.	OUTPUT POWER AND PSD	207
8.23.	802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND 210	
8.23.1.	26 dB BANDWIDTH	210
8.23.2.	99% BANDWIDTH	212
8.23.3.	AVERAGE POWER	214
8.23.4.	OUTPUT POWER AND PSD	215
8.24.	802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND 218	
8.25.	802.11n HT20 ANTENNA A MODE IN THE 5.6 GHz BAND	219
8.25.1.	26 dB BANDWIDTH	219
8.25.2.	99% BANDWIDTH	222
8.25.3.	AVERAGE POWER	225
8.25.4.	OUTPUT POWER AND PSD	226
8.26.	802.11ac VHT20 ANTENNA A STRADDLE CHANNEL 144 RESULTS	230
8.26.1.	OUTPUT POWER AND PSD	230
8.26.2.	6 dB BANDWIDTH	234

8.27.	802.11n HT20 ANTENNA B MODE IN THE 5.6 GHz BAND	235
8.27.1.	26 dB BANDWIDTH	235
8.27.2.	99% BANDWIDTH	238
8.27.3.	AVERAGE POWER	241
8.27.4.	OUTPUT POWER AND PSD	242
8.28.	802.11ac VHT20 ANTENNA B STRADDLE CHANNEL 144 RESULTS	246
8.28.1.	OUTPUT POWER AND PSD	246
8.28.2.	6 dB BANDWIDTH	250
8.29.	802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND .	251
8.29.1.	26 dB BANDWIDTH	251
8.29.2.	99% BANDWIDTH	256
8.29.3.	AVERAGE POWER	261
8.29.4.	OUTPUT POWER AND PSD	262
8.30.	802.11ac VHT20 2Tx (ANTENNA A + ANTENNA B) CDD STRADDLE CHANNEL 144 RESULTS	268
8.30.1.	OUTPUT POWER AND PSD	268
8.30.2.	6 dB BANDWIDTH	274
8.31.	802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND	276
8.32.	802.11n HT40 ANTENNA A MODE IN THE 5.6 GHz BAND	277
8.32.1.	26 dB BANDWIDTH	277
8.32.2.	99% BANDWIDTH	280
8.32.3.	AVERAGE POWER	283
8.32.4.	OUTPUT POWER AND PSD	284
8.33.	802.11ac VHT40 ANTENNA A STRADDLE CH 142 RESULTS	288
8.33.1.	OUTPUT POWER AND PSD	288
8.33.2.	6 dB BANDWIDTH	292
8.34.	802.11n HT40 ANTENNA B MODE IN THE 5.6 GHz BAND	293
8.34.1.	26 dB BANDWIDTH	293
8.34.2.	99% BANDWIDTH	296
8.34.3.	AVERAGE POWER	299
8.34.4.	OUTPUT POWER AND PSD	300
8.35.	802.11ac VHT40 ANTENNA B STRADDLE CH 142 RESULTS	304
8.35.1.	OUTPUT POWER AND PSD	304
8.35.2.	6 dB BANDWIDTH	308
8.36.	802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND .	309
8.36.1.	26 dB BANDWIDTH	309
8.36.2.	99% BANDWIDTH	314
8.36.3.	AVERAGE POWER	319
8.36.4.	OUTPUT POWER AND PSD	320
8.37.	802.11ac VHT40 2Tx (ANTENNA A + ANTENNA B) CDD STRADDLE CHANNEL 142 RESULTS	326
8.37.1.	OUTPUT POWER AND PSD	326
8.37.2.	6 dB BANDWIDTH	332
8.38.	802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND	334
8.39.	802.11ac VHT80 ANTENNA A MODE IN THE 5.6 GHz BAND	335
8.39.1.	26 dB BANDWIDTH	335
8.39.2.	99% BANDWIDTH	338

8.39.3.	AVERAGE POWER	341
8.39.4.	OUTPUT POWER AND PSD	342
8.40.	STRADDLE CHANNEL 138 RESULTS.....	345
8.40.1.	OUTPUT POWER AND PSD	345
8.40.2.	6 dB BANDWIDTH.....	349
8.41.	802.11ac VHT80 ANTENNA B MODE IN THE 5.6 GHz BAND	350
8.41.1.	26 dB BANDWIDTH.....	350
8.41.2.	99% BANDWIDTH	353
8.41.3.	AVERAGE POWER	356
8.41.4.	OUTPUT POWER AND PSD	357
8.42.	STRADDLE CHANNEL 138 RESULTS.....	360
8.42.1.	OUTPUT POWER AND PSD	360
8.42.2.	6 dB BANDWIDTH.....	364
8.43.	802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND 365	
8.43.1.	26 dB BANDWIDTH.....	365
8.43.2.	99% BANDWIDTH	369
8.43.3.	AVERAGE POWER	373
8.43.4.	OUTPUT POWER AND PSD	374
8.44.	STRADDLE CHANNEL 138 RESULTS.....	379
8.44.1.	OUTPUT POWER AND PSD	379
8.44.2.	6 dB BANDWIDTH.....	385
8.45.	802.11n VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND 387	
8.46.	802.11n HT20 ANTENNA A MODE IN THE 5.8 GHz BAND	388
8.46.1.	6 dB BANDWIDTH.....	388
8.46.2.	26 dB BANDWIDTH.....	391
8.46.3.	99% BANDWIDTH	394
8.46.4.	AVERAGE POWER	397
8.46.5.	OUTPUT POWER.....	398
8.46.6.	PSD	400
8.47.	802.11n HT20 ANTENNA B MODE IN THE 5.8 GHz BAND	403
8.47.1.	6 dB BANDWIDTH.....	403
8.47.2.	26 dB BANDWIDTH.....	406
8.47.3.	99% BANDWIDTH	409
8.47.4.	AVERAGE POWER	412
8.47.5.	OUTPUT POWER.....	413
8.47.6.	PSD	415
8.48.	802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND .	418
8.48.1.	6 dB BANDWIDTH.....	418
8.48.2.	26 dB BANDWIDTH.....	422
8.48.3.	99% BANDWIDTH	426
8.48.4.	AVERAGE POWER	430
8.48.5.	OUTPUT POWER.....	431
8.48.6.	PSD	433
8.49.	802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND	438
8.50.	802.11n HT40 ANTENNA A MODE IN THE 5.8 GHz BAND	439
8.50.1.	6 dB BANDWIDTH.....	439

8.50.2.	26 dB BANDWIDTH	441
8.50.3.	99% BANDWIDTH	443
8.50.4.	AVERAGE POWER	445
8.50.5.	OUTPUT POWER.....	446
8.50.6.	PSD	448
8.51.	802.11n HT40 ANTENNA B MODE IN THE 5.8 GHz BAND	451
8.51.1.	6 dB BANDWIDTH.....	451
8.51.2.	26 dB BANDWIDTH.....	453
8.51.3.	99% BANDWIDTH	455
8.51.4.	AVERAGE POWER	457
8.51.5.	OUTPUT POWER.....	458
8.51.6.	PSD	460
8.52.	802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND .	463
8.52.1.	6 dB BANDWIDTH.....	463
8.52.2.	26 dB BANDWIDTH.....	466
8.52.3.	99% BANDWIDTH	469
8.52.4.	AVERAGE POWER	472
8.52.5.	OUTPUT POWER.....	473
8.52.6.	PSD	475
8.53.	802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND	479
8.54.	802.11ac VHT80 ANTENNA A MODE IN THE 5.8 GHz BAND	480
8.54.1.	6 dB BANDWIDTH.....	480
8.54.2.	26 dB BANDWIDTH.....	481
8.54.3.	99% BANDWIDTH	482
8.54.4.	AVERAGE POWER	483
8.54.5.	OUTPUT POWER.....	484
8.54.6.	PSD	486
8.55.	802.11ac VHT80 ANTENNA B MODE IN THE 5.8 GHz BAND	488
8.55.1.	6 dB BANDWIDTH.....	488
8.55.2.	26 dB BANDWIDTH.....	489
8.55.3.	99% BANDWIDTH	490
8.55.4.	AVERAGE POWER	491
8.55.5.	OUTPUT POWER.....	492
8.55.6.	PSD	494
8.56.	802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND 496	
8.56.1.	6 dB BANDWIDTH.....	496
8.56.2.	26 dB BANDWIDTH.....	498
8.56.3.	99% BANDWIDTH	500
8.56.4.	AVERAGE POWER	502
8.56.5.	OUTPUT POWER.....	503
8.56.6.	PSD	505
8.57.	802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND 508	
9.	RADIATED TEST RESULTS	509
9.1.	LIMITS AND PROCEDURE.....	509
9.2.	TRANSMITTER ABOVE 1GHz.....	510
9.2.1.	11n HT20 ANTENNA A SISO MODE IN THE 5.2GHz BAND	510

9.2.2.	11n HT20 ANTENNA B SISO MODE IN THE 5.2GHz BAND	518
9.2.3.	11n HT20 2TX CDD MIMO MODE IN THE 5.2GHz BAND	526
9.2.4.	11n HT40 ANTENNA A SISO MODE IN THE 5.2GHz BAND	534
9.2.5.	11n HT40 ANTENNA B SISO MODE IN THE 5.2GHz BAND	540
9.2.6.	11n HT40 2TX CDD MIMO MODE IN THE 5.2GHz BAND	546
9.2.7.	11ac HT80 ANTENNA A SISO MODE IN THE 5.2GHz BAND	552
9.2.8.	11ac HT80 ANTENNA B SISO MODE IN THE 5.2GHz BAND	556
9.2.9.	11ac HT80 2TX CDD MIMO MODE IN THE 5.2GHz BAND	560
9.2.10.	11n HT20 ANTENNA A SISO MODE IN THE 5.3GHz BAND	564
9.2.11.	11n HT20 ANTENNA B SISO MODE IN THE 5.3GHz BAND	572
9.2.12.	11n HT20 2TX CDD MIMO MODE IN THE 5.3GHz BAND	580
9.2.13.	11n HT40 ANTENNA A SISO MODE IN THE 5.3GHz BAND	588
9.2.14.	11n HT40 ANTENNA B SISO MODE IN THE 5.3GHz BAND	594
9.2.15.	11n HT40 2TX CDD MIMO MODE IN THE 5.3GHz BAND	600
9.2.16.	11ac HT80 ANTENNA A SISO MODE IN THE 5.3GHz BAND	606
9.2.17.	11ac HT80 ANTENNA B SISO MODE IN THE 5.3GHz BAND	610
9.2.18.	11ac HT80 2TX CDD MIMO MODE IN THE 5.3GHz BAND	614
9.2.19.	11n HT20 ANTENNA A SISO MODE IN THE 5.6GHz BAND	618
9.2.20.	11n HT20 ANTENNA A SISO STRADDLE CHANNEL 144	628
9.2.21.	11n HT20 ANTENNA B SISO MODE IN THE 5.6GHz BAND	630
9.2.22.	11ac HT20 ANTENNA B SISO STRADDLE CHANNEL 144	640
9.2.23.	11n HT20 2TX CDD MIMO MODE IN THE 5.6GHz BAND	642
9.2.24.	11ac HT20 2TX CDD MIMO STRADDLE CHANNEL 144	652
9.2.25.	11n HT40 ANTENNA A SISO MODE IN THE 5.6GHz BAND	654
9.2.26.	11n HT40 ANTENNA A SISO STRADDLE CHANNEL 142	664
9.2.27.	11n HT40 ANTENNA B SISO MODE IN THE 5.6GHz BAND	666
9.2.28.	11n HT40 ANTENNA B SISO STRADDLE CHANNEL 142	676
9.2.29.	11n HT40 2TX CDD MIMO MODE IN THE 5.6GHz BAND	678
9.2.30.	11ac HT40 2TX CDD MIMO STRADDLE CHANNEL 142	688
9.2.31.	11ac HT80 ANTENNA A SISO MODE IN THE 5.6GHz BAND	690
9.2.32.	11ac HT80 ANTENNA A SISO STRADDLE CHANNEL 138	696
9.2.33.	11ac HT80 ANTENNA B SISO MODE IN THE 5.6GHz BAND	698
9.2.34.	11ac HT80 ANTENNA B SISO STRADDLE CHANNEL 138	704
9.2.35.	11ac HT80 2TX CDD MIMO MODE IN THE 5.6GHz BAND	706
9.2.36.	11ac HT80 2TX CDD MIMO STRADDLE CHANNEL 138	712
9.2.37.	11n HT20 ANTENNA A SISO MODE IN THE 5.8GHz BAND	714
9.2.38.	11n HT20 ANTENNA B SISO MODE IN THE 5.8GHz BAND	724
9.2.39.	11n HT20 2TX CDD MIMO MODE IN THE 5.8GHz BAND	734
9.2.40.	11n HT40 ANTENNA A SISO MODE IN THE 5.8GHz BAND	744
9.2.41.	11n HT40 ANTENNA B SISO MODE IN THE 5.8GHz BAND	752
9.2.42.	11n HT40 2TX CDD MIMO MODE IN THE 5.8GHz BAND	760
9.2.43.	11ac HT80 ANTENNA A SISO MODE IN THE 5.8GHz BAND	768
9.2.44.	11ac HT80 ANTENNA B SISO MODE IN THE 5.8GHz BAND	774
9.2.45.	11ac HT80 2TX CDD MIMO MODE IN THE 5.8GHz BAND	780
9.3.	WORST-CASE CO-LOCATION	786
9.4.	WORST-CASE BELOW 1 GHz	788
9.5.	WORST-CASE 18 to 26 GHz	790
9.6.	WORST-CASE 26 to 40 GHz	792
10.	AC POWER LINE CONDUCTED EMISSIONS	794
10.1.	EUT POWERED BY AC/DC ADAPTER VIA USB CABLE	795

10.2.	EUT POWERED BY HOST PC VIA USB CABLE	797
11.	DYNAMIC FREQUENCY SELECTION.....	799
11.1.	OVERVIEW	799
11.1.1.	LIMITS.....	799
11.1.2.	TEST AND MEASUREMENT SYSTEM.....	803
11.1.3.	TEST AND MEASUREMENT SOFTWARE.....	805
11.1.4.	SETUP OF EUT (CLIENT MODE)	806
11.1.5.	SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE).....	807
11.1.6.	DESCRIPTION OF EUT	808
11.2.	CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH	810
11.2.1.	TEST CHANNEL.....	810
11.2.2.	RADAR WAVEFORM AND TRAFFIC	810
11.2.3.	OVERLAPPING CHANNEL TESTS.....	813
11.2.4.	MOVE AND CLOSING TIME	813
11.3.	CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH	817
11.3.1.	TEST CHANNEL.....	817
11.3.2.	RADAR WAVEFORM AND TRAFFIC	817
11.3.3.	OVERLAPPING CHANNEL TESTS.....	820
11.3.4.	MOVE AND CLOSING TIME	820
11.4.	CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH	824
11.4.1.	TEST CHANNEL.....	824
11.4.2.	RADAR WAVEFORM AND TRAFFIC	824
11.4.3.	OVERLAPPING CHANNEL TESTS.....	827
11.4.4.	MOVE AND CLOSING TIME	827
11.4.5.	10-MINUTE CLIENT Tx MONITORING PERIOD.....	831
11.5.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH 832	
11.5.1.	TEST CHANNEL.....	832
11.5.2.	RADAR WAVEFORM AND TRAFFIC	832
11.5.3.	OVERLAPPING CHANNEL TESTS.....	835
11.5.4.	MOVE AND CLOSING TIME	835
11.6.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH 839	
11.6.1.	TEST CHANNEL.....	839
11.6.2.	RADAR WAVEFORM AND TRAFFIC	839
11.6.3.	OVERLAPPING CHANNEL TESTS.....	842
11.6.4.	MOVE AND CLOSING TIME	842
11.7.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH 846	
11.7.1.	TEST CHANNEL.....	846
11.7.2.	RADAR WAVEFORM AND TRAFFIC	846
11.7.3.	OVERLAPPING CHANNEL TESTS.....	849
11.7.4.	MOVE AND CLOSING TIME	849
11.7.5.	10-MINUTE CLIENT Tx MONITORING PERIOD.....	853
12.	SETUP PHOTOS.....	854

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: TABLET DEVICE

MODEL: A1709, A1852

SERIAL NUMBER: DLXSR04VHQG (CONDUCTED); DLXSG09THLXJ (RADIATED)
DLXSR07YHQG8 (DFS)

DATE TESTED: DECEMBER 27, 2016 – FEBRUARY 01, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:



CHIN PANG
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

JINGANG LI
EMC LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v02/D03 v01r02/D06 v02/ D07 v01r01, FCC KDB 789033 D02 v01r03, FCC KDB 644545 D03 v01, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (IC:2324B-1)	☒ Chamber D (IC:2324B-4)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC:2324B-5)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:2324B-6)
	☒ Chamber G (IC:2324B-7)
	☐ Chamber H (IC:2324B-8)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a tablet with multimedia functions (music, application support, and video), Cellular GSM/GPRS/EGPRS/CDMA2000 1xRTT/1x Advanced/EVDO Rev.A/EVDO Rev.B /WCDMA /HSPA+/DC- HSDPA/LTE FDD & Carrier Aggregation/TDD/TD-SCDMA radio, IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. DESCRIPTION OF MODELS DIFFERENCES

Both Model A1709 and A1852 have identical PCB layout, design and functionality, except that A1709 supports second electronic-UICC based SIM or “soft SIM” (called eSIM) beside the regular UICC based SIM and A1852 will come with eSIM removed. RF and electromagnetic characteristic are independent of the eSIM element. Both Models have exactly same technology and band support. Model A1709 is used for EMC/RSE and that data will be used for both Models

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum average conducted output power as follows:

NOTE: Covered modes are test reduction modes. The output powers on the “covered modes are equal to or less than the mode referenced and use the same modulation.

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	17.00	50.12
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.48	88.72
	802.11n HT20 2TX STBC	19.73	93.97
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
5190 - 5230	802.11n HT40 SISO	16.80	47.86
	802.11n HT40 2TX CDD	19.77	94.84
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5210	802.11ac VHT80 SISO	14.00	25.12
	802.11ac VHT80 2TX CDD	15.45	35.08
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	16.40	43.65
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.36	86.30
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
5270 - 5310	802.11n HT40 SISO	16.46	44.26
	802.11n HT40 2TX CDD	19.43	87.70
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5290	802.11ac VHT80 SISO	13.00	19.95
	802.11ac VHT80 2TX CDD	14.49	28.12
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
5500 - 5700	802.11n HT20 SISO	15.00	31.62
5720	802.11ac VHT20 SISO (based on UNII-2C band output power)	13.23	21.04
5500 - 5700	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
5500 - 5700	802.11n HT20 2TX CDD	17.87	61.24
5720	802.11ac VHT20 2TX CDD (based on UNII-2C band output power)	15.91	38.99
5500 - 5700	802.11n HT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
5500 - 5700	802.11ac VHT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
5500 - 5700	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
5500 - 5700	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
5720	802.11ac VHT20 2TX STBC/SDM (based on UNII-2C band output power)	Covered by 802.11n HT20 2TX CDD	
5510 - 5670	802.11n HT40 SISO	14.96	31.33
5710	802.11ac VHT40 SISO (based on UNII-2C band output power)	13.96	24.89
5510 - 5670	802.11n HT40 2TX CDD	17.99	62.95
5710	802.11ac VHT40 2TX CDD (based on UNII-2C band output power)	16.97	49.77
5510 - 5670	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
5710	802.11ac VHT40 2TX STBC (based on UNII-2C band output power)	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5710	802.11ac VHT40 2TX SDM (based on UNII-2C band output power)	Covered by 802.11n HT40 2TX CDD	
5530-5610	802.11ac VHT80 SISO	15.00	31.62
5690	802.11ac VHT80 SISO (based on UNII-2C band output power)	14.53	28.38
5530-5610	802.11ac VHT80 2TX CDD	17.95	62.37
5690	802.11ac VHT80 2TX CDD (based on UNII-2C band output power)	17.37	54.58
5530-5610	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
5690	802.11ac VHT80 2TX STBC(based on UNII-2C band output power)	Covered by 802.11ac VHT80 2TX CDD	
5530-5610	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	
5690	802.11ac VHT80 2TX SDM (based on UNII-2C band output power)	Covered by 802.11ac VHT80 2TX CDD	

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	15.00	31.62
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	17.73	59.29
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
5755 - 5795	802.11n HT40 SISO	14.98	31.48
	802.11n HT40 2TX CDD	17.77	59.84
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5775	802.11ac VHT80 SISO	14.92	31.05
	802.11ac VHT80 2TX CDD	17.74	59.43
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	Antenna A	Antenna B
5.2	1.66	2.65
5.3	2.28	2.81
5.5	3.69	3.10
5.8	3.40	3.18

5.5. SOFTWARE AND FIRMWARE

The software installed in the EUT during testing was 14E232.

5.6. WORST-CASE CONFIGURATION AND MODE

For radiated harmonics spurious below 1GHz, 18-40GHz and power line conducted emissions were performed with the EUT set at the CDD mode at highest power setting among the CDD/STBC/SDM modes as worst-case scenario.

The output power for PSD and spurious tests was set higher than maximum for the purposes of testing only.

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either Antenna A, or Antenna B. All antenna ports have the same power; output power and PSD measurement for SISO modes on both antennas are reported. For 2TX MIMO modes, Antenna A/Antenna B, used at the same time.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that (see table below) was worst-case orientations. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2-5.8	1TX SISO	Antenna A	Landscape
		Antenna B	Landscape
	2TX MIMO	Antenna A + Antenna B	Landscape

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in BT/BLE and WLAN 5 GHz bands. Baseline testing was performed on various configurations to determine the worst case on radiated emissions.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	A1286	7313700NAGW	N/A
Laptop AC/DC adapter	Apple	A1343	C062172045DDJ94A6	N/A
Earphone	Apple	NA	NA	N/A
EUT AC/DC adapter	Apple	A1357	W010A051	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (RADIATED BELOW 1 GHZ AND AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	shielded	1	N/A


I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGURATION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

TEST SETUP - CONDUCTED TESTS

The EUT was connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

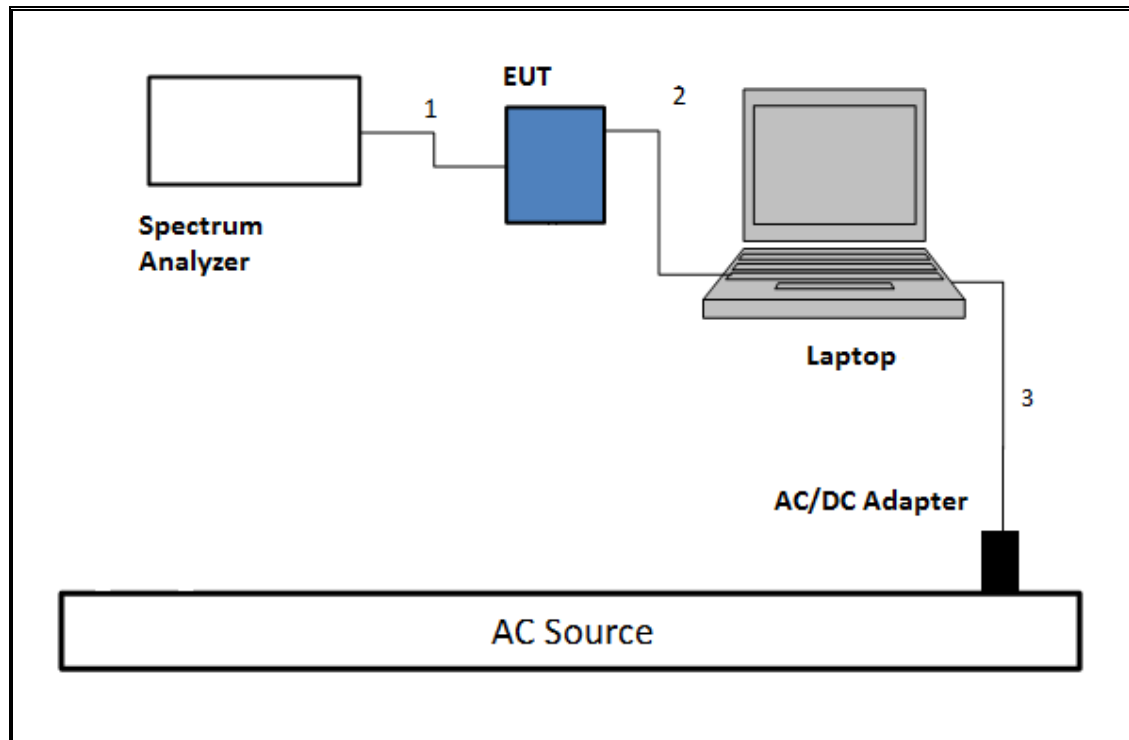

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.


SETUP DIAGRAM

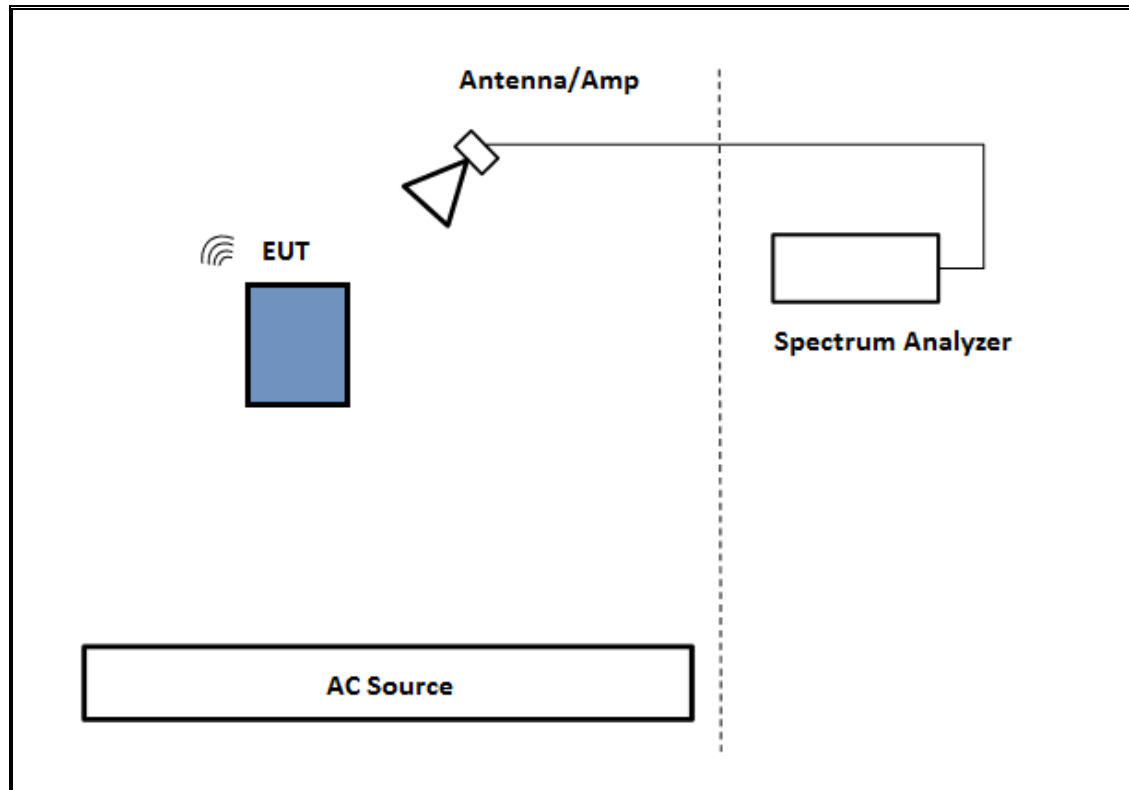

TEST SETUP- BELOW 1GHz

The EUT was powered by AC/DC adapter and connected with earphone. Test software exercised the EUT.


SETUP DIAGRAM

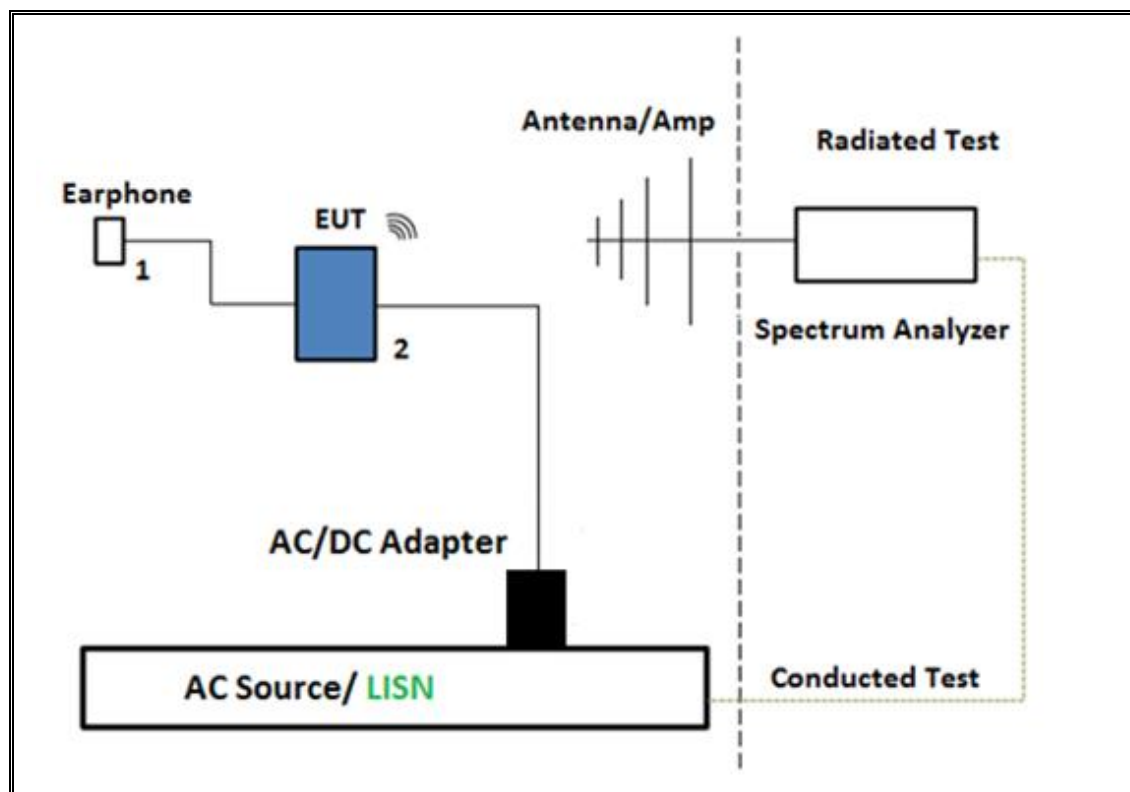

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.


SETUP DIAGRAM

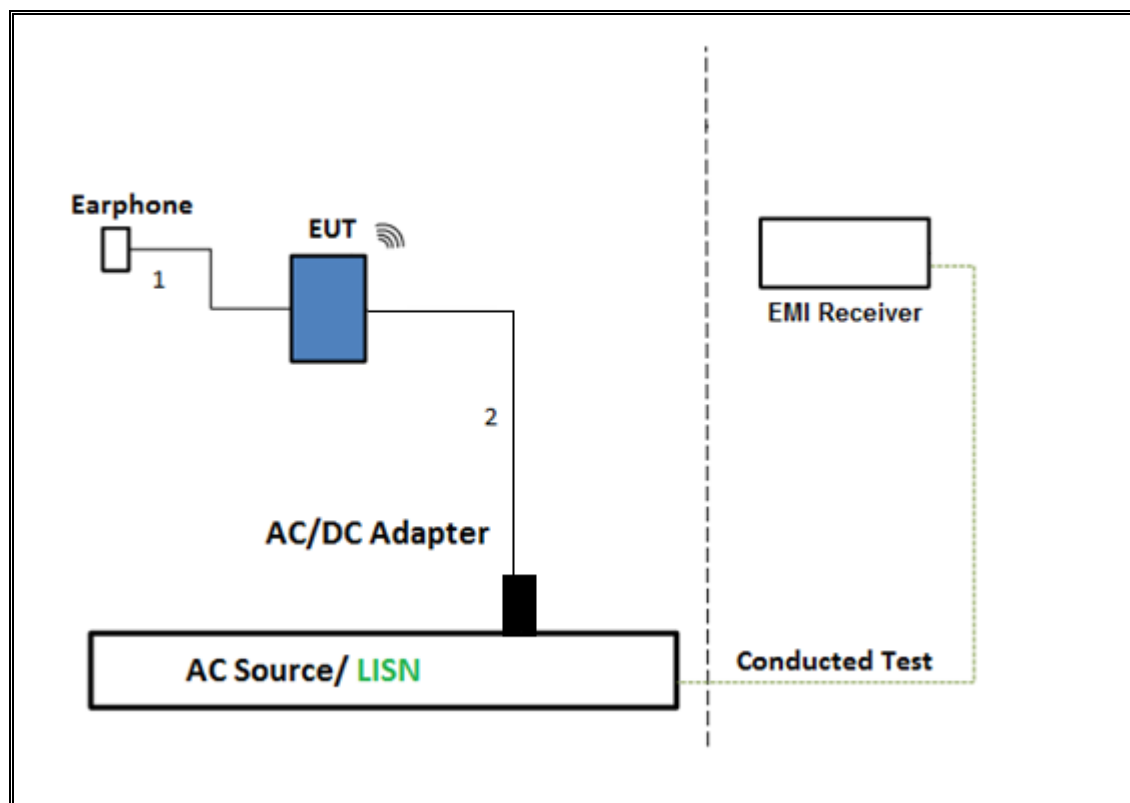

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

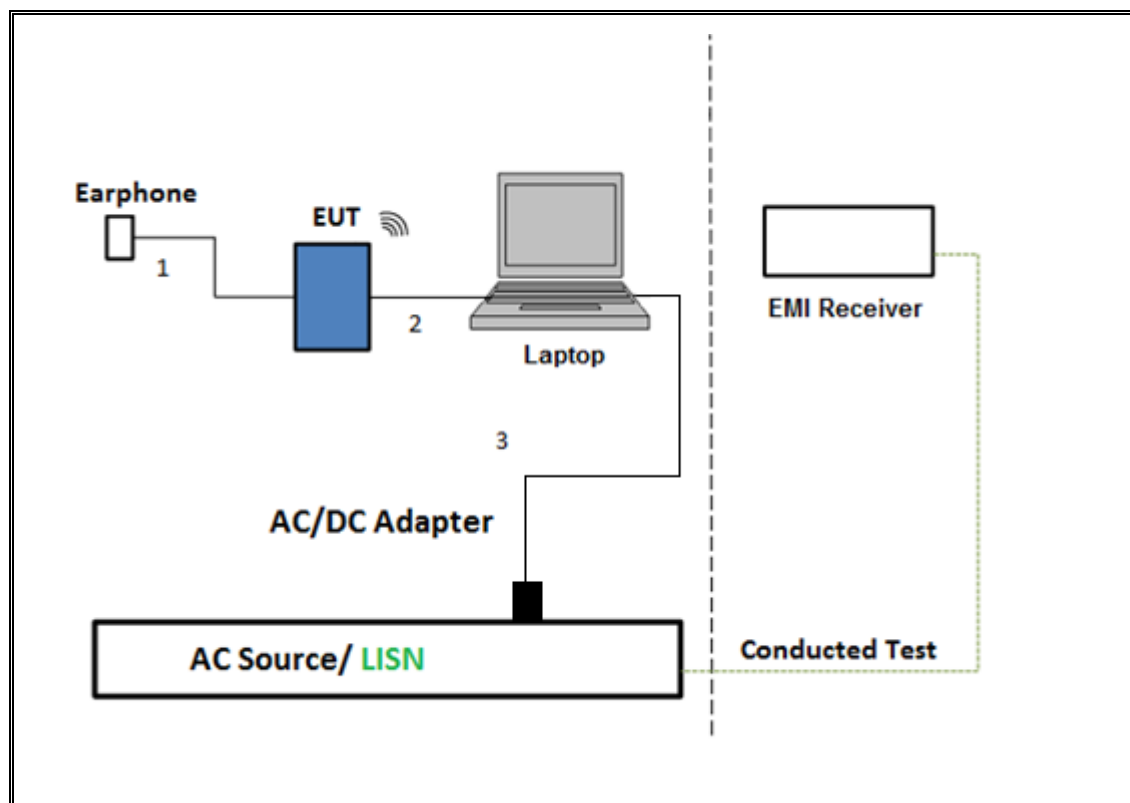

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Power Meter, P-series single channel	Agilent	N1911A	T227	10/11/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	T1228	06/20/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	02/22/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T407	04/04/2017
RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	T740	11/29/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma Instrument	310	T286	05/04/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T905	06/21/2017
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T300	11/10/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T426	9/23/2017
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T243	10/11/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T285	6/20/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1613	9/23/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T899	5/26/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T834	6/17/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A-544	T1210	6/30/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T339	09/22/2017
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4446A	T123	10/20/2017
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T447	06/16/2017
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T402	7/5/2017
Antenna, Horn 26.5GHz to 40GHz	ARA	MWH-2640/B	T446	05/25/2017
Amplifier, 26.5GHz to 40GHz	Miteq	NSP 4000 SP2	T88	04/07/2017
AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1124	10/07/2017
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/08/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

NOTE: *testing is completed before equipment calibration expiration date.

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

7.1. ON TIME AND DUTY CYCLE

LIMITS



None; for reporting purposes only.



PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.

RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.920	1.941	0.989	98.92%	0.00	0.010
802.11n HT20 CDD 2TX	1.914	1.938	0.988	98.76%	0.00	0.010
802.11n HT40 1TX	0.942	0.966	0.975	97.52%	0.11	1.062
802.11n HT40 CDD 2TX	0.944	0.966	0.977	97.72%	0.10	1.059
802.11ac VHT80 1TX	0.460	0.482	0.954	95.44%	0.20	2.174
802.11ac VHT80 CDD 2TX	0.460	0.481	0.956	95.63%	0.19	2.174

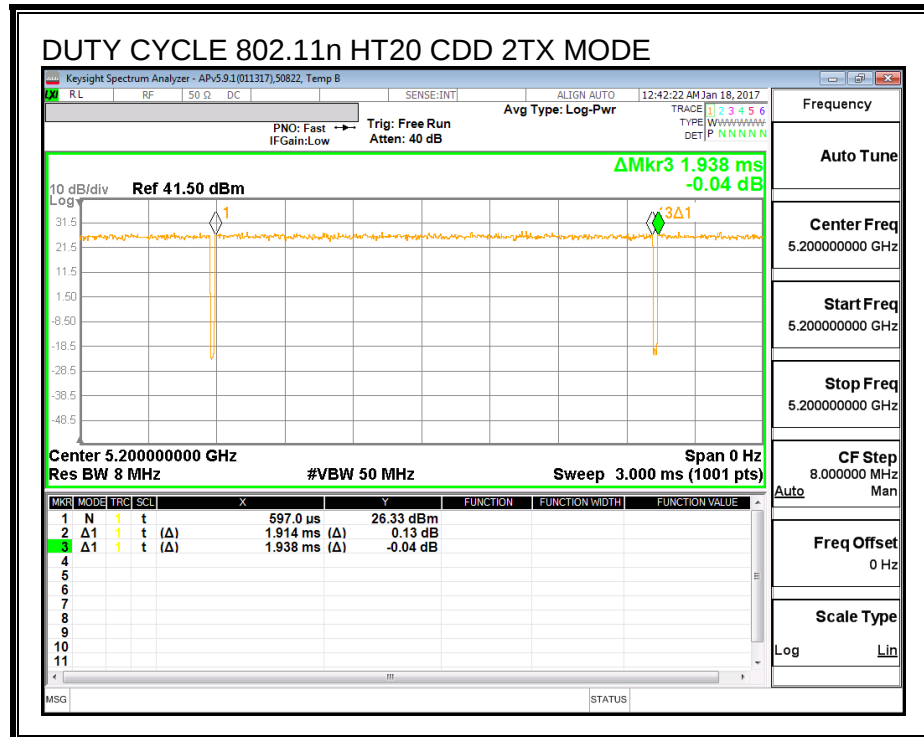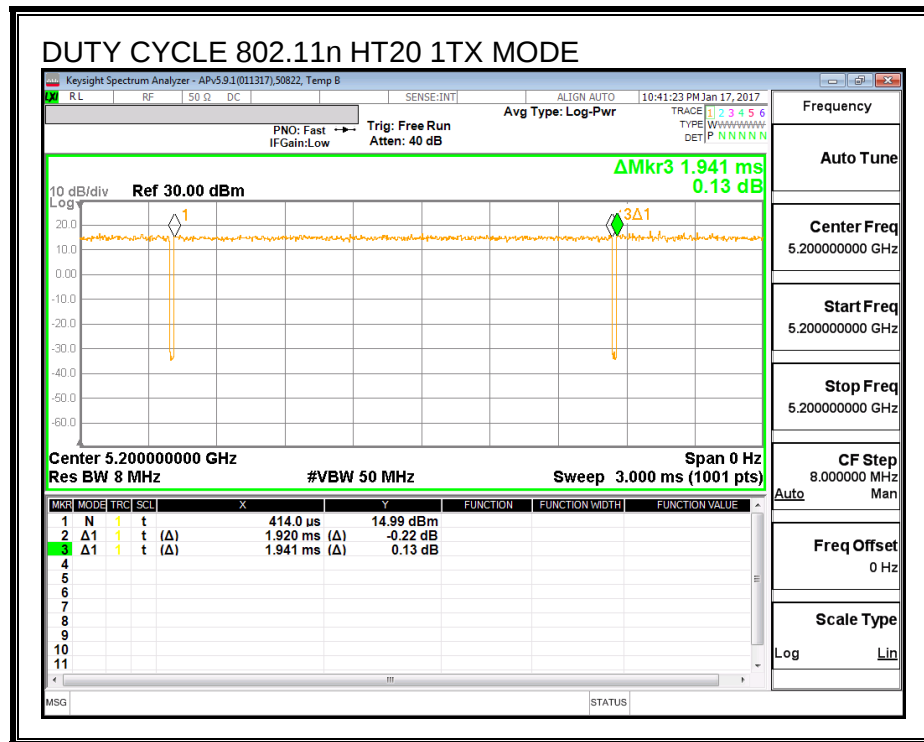

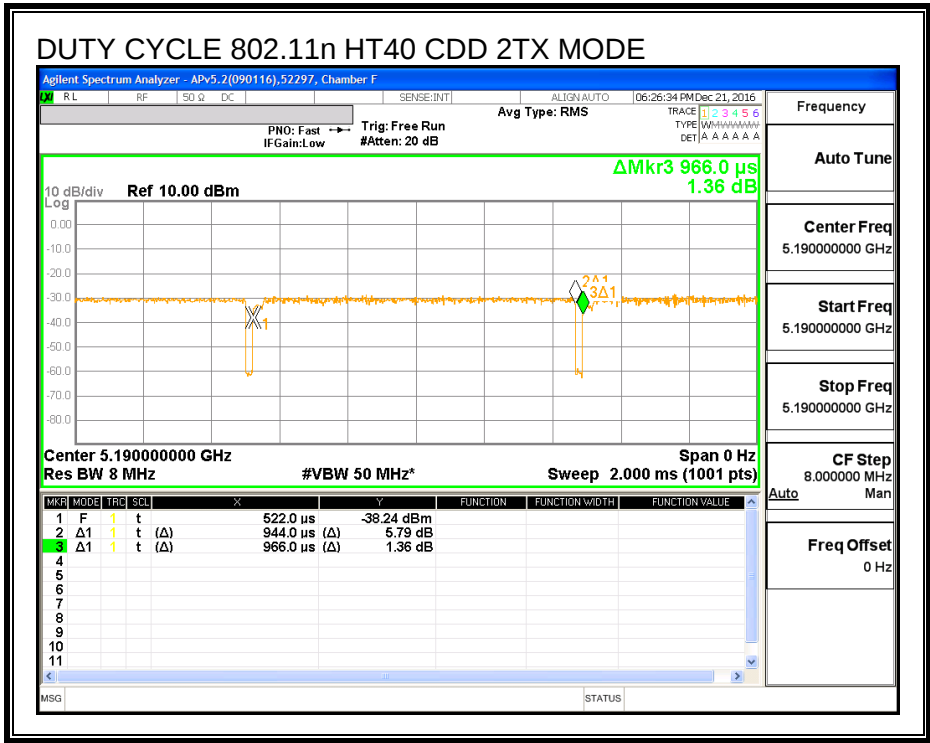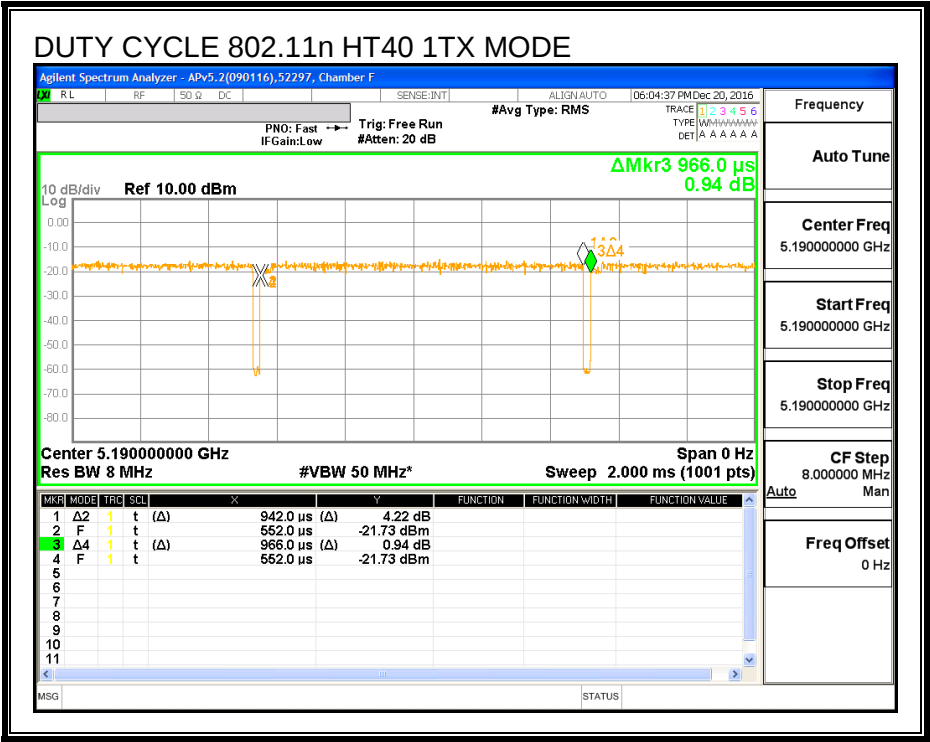

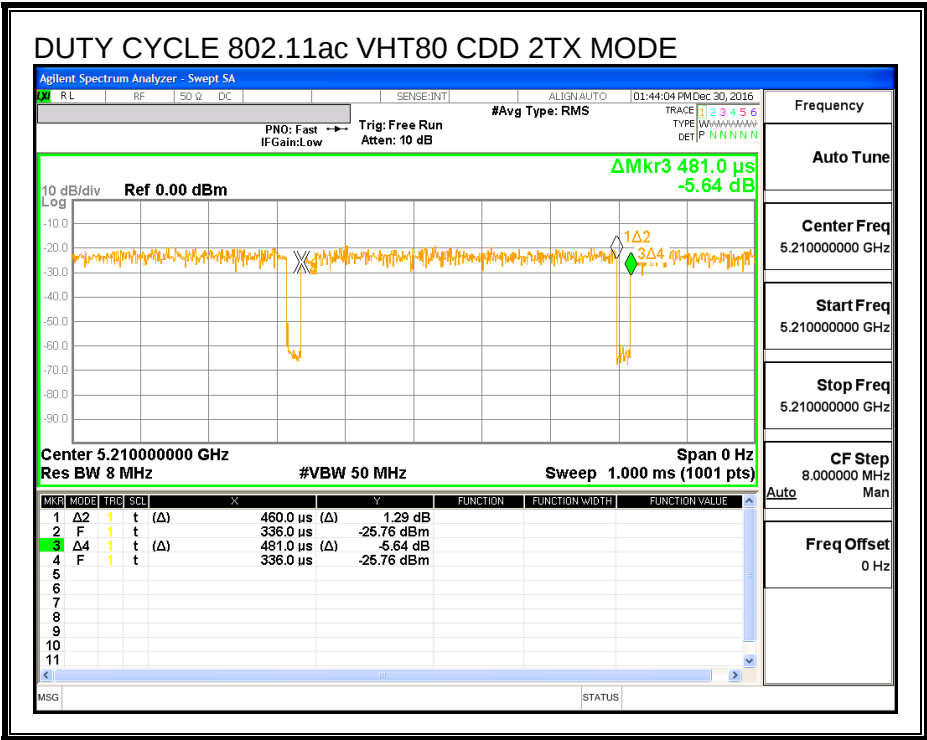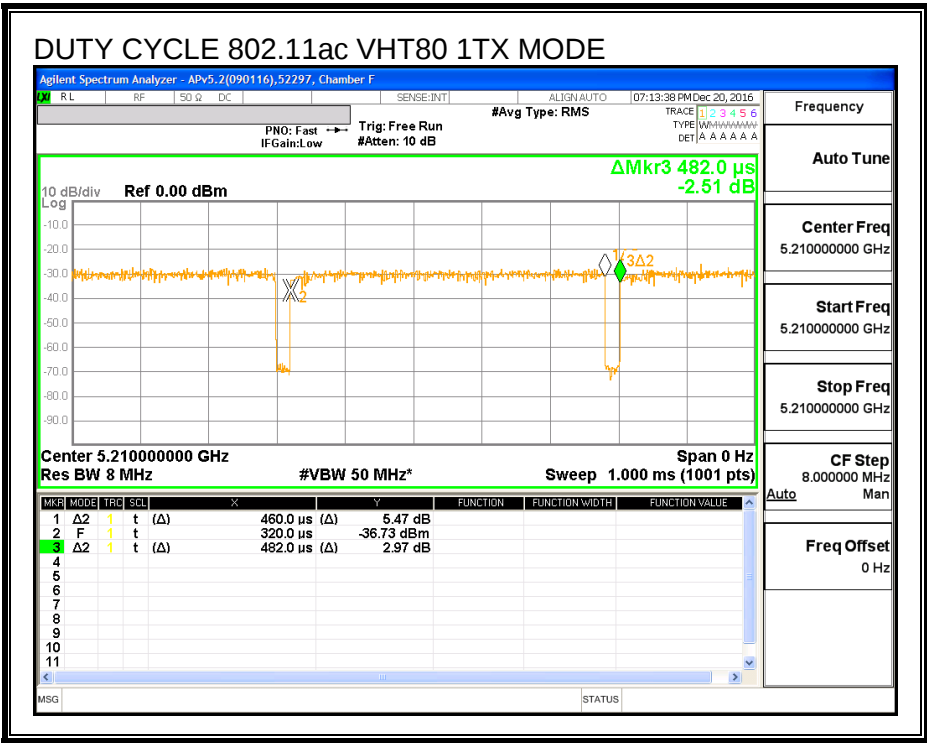

7.2. MEASUREMENT METHODS

6 dB Emission BW: KDB 789033 D02 v01r03, Section C.

26 dB Emission BW: KDB 789033 D02 v01r03, Section C.

99% Occupied BW: KDB 789033 D02 v01r03, Section D.

Conducted Output Power: KDB 789033 D02 v01r03, Section E.3.b (Method PM-G).

Power Spectral Density: KDB 789033 D02 v01r03, Section F (Method SA-2).

Unwanted emissions in restricted bands: KDB 789033 D02 v01r03, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01r03, Sections G.3, G.4, and G.5.

8. ANTENNA PORT TEST RESULTS

8.1. 802.11n HT20 ANTENNA A MODE IN THE 5.2 GHz BAND

8.1.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.04
Mid	5200	22.12
High	5240	22.04

26 dB BANDWIDTH

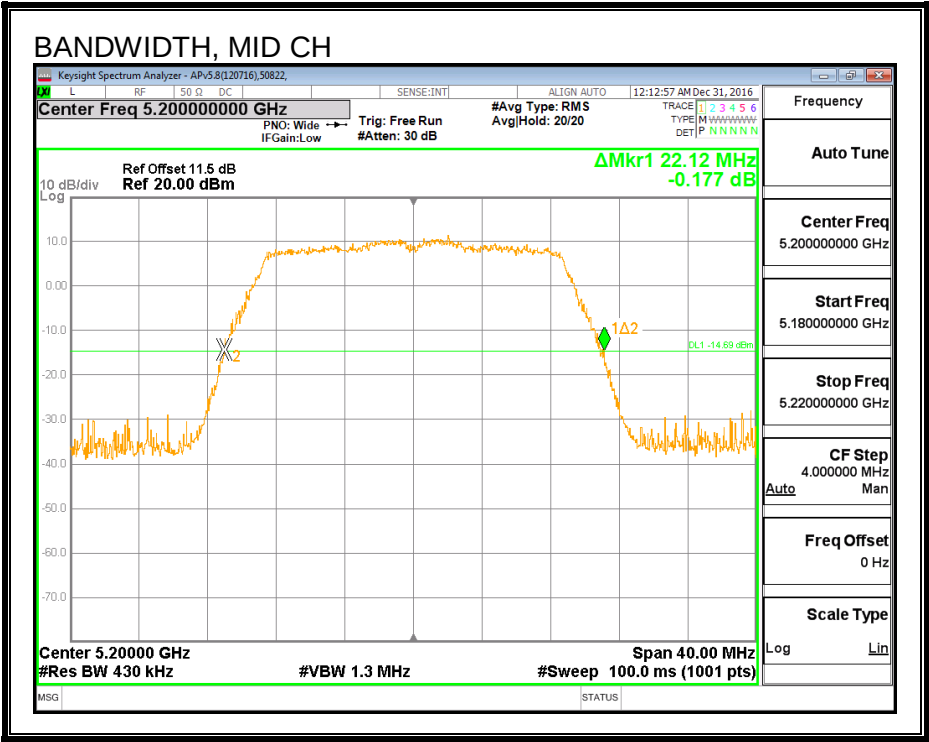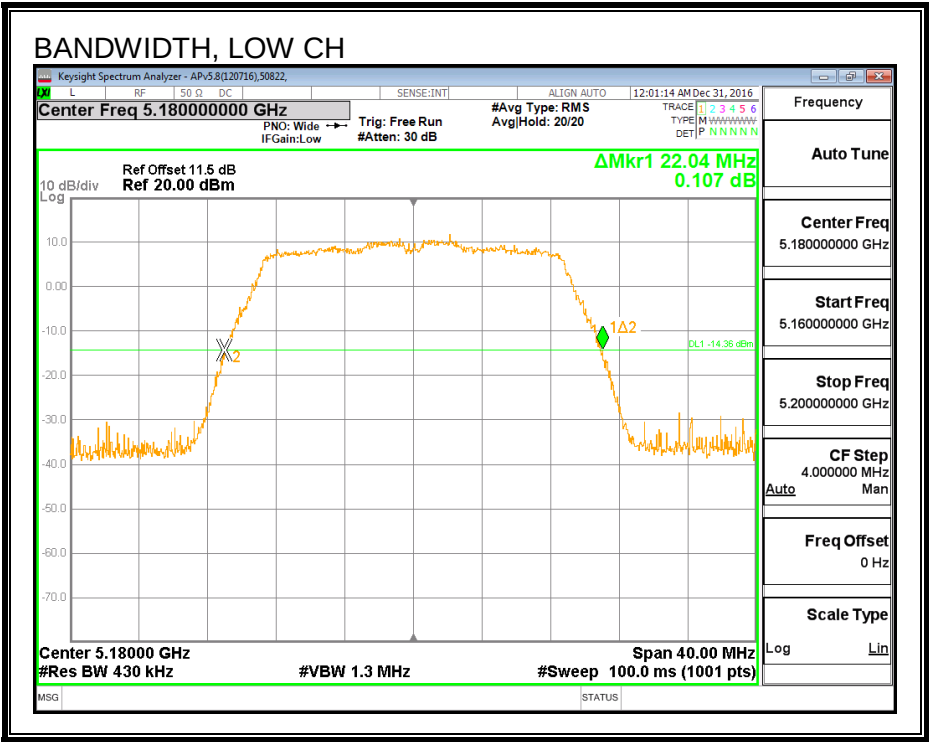

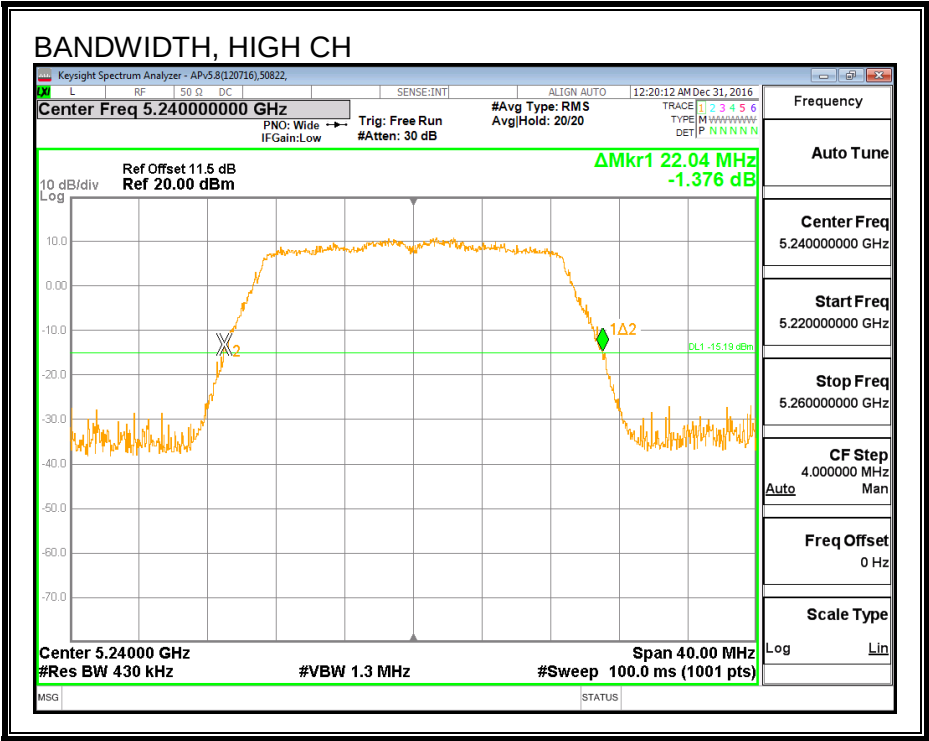

8.1.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.718
Mid	5200	17.754
High	5240	17.782

99% BANDWIDTH

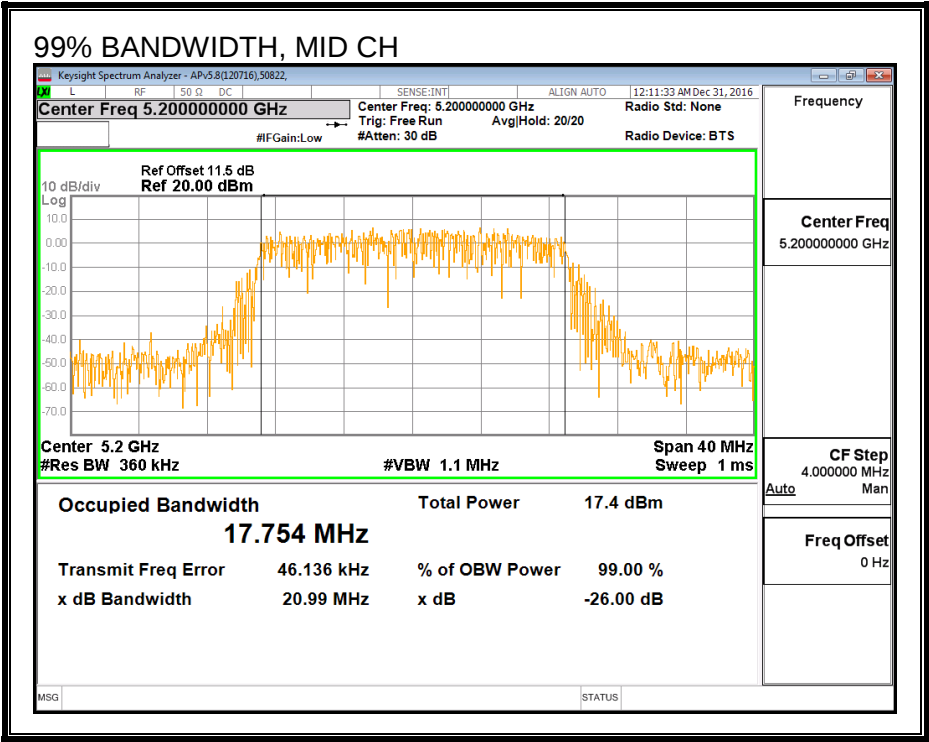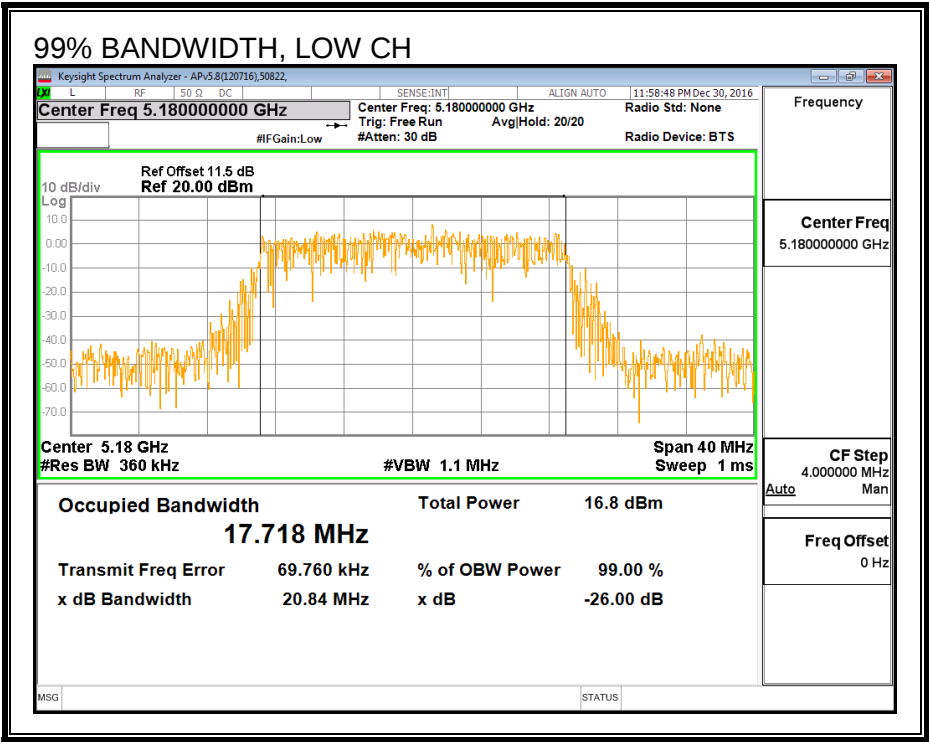

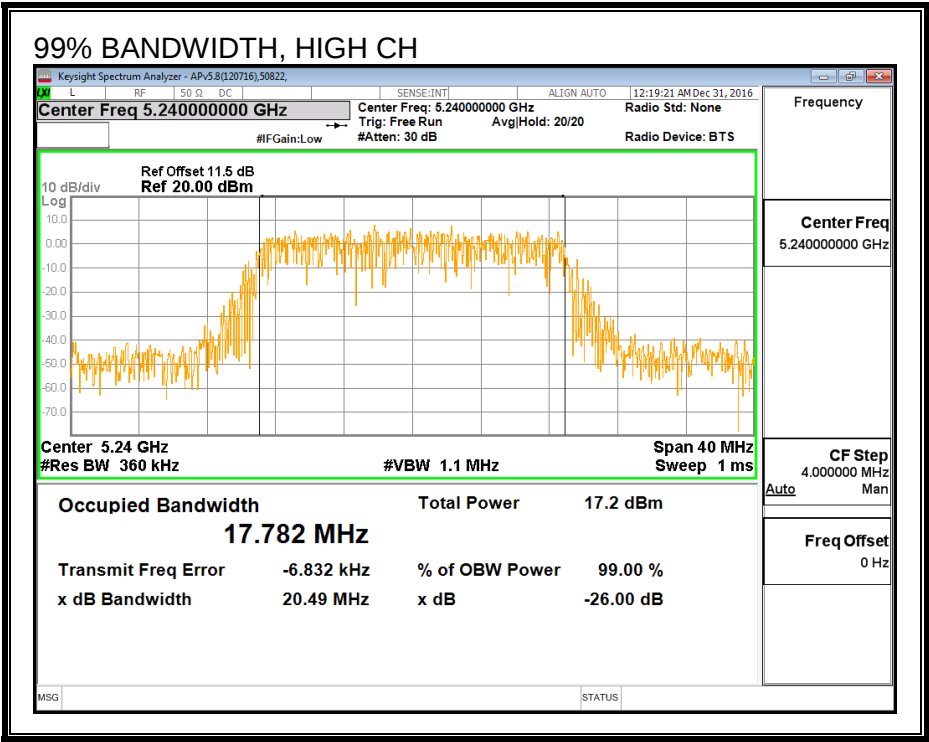

8.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	45256	Date:	1/20/17
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.96
Mid	5200	16.44
High	5240	16.30

8.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	45256	Date:	1/20/17
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	1.66	1.66	24.00	11.00
Mid	5200	1.66	1.66	24.00	11.00
High	5240	1.66	1.66	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Ant A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.96	15.96	24.00	-8.04
Mid	5200	16.44	16.44	24.00	-7.56
High	5240	16.30	16.30	24.00	-7.70

PSD Results

Channel	Frequency (MHz)	Ant A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.63	6.63	11.00	-4.38
Mid	5200	6.44	6.44	11.00	-4.56
High	5240	6.46	6.46	11.00	-4.54

PSD

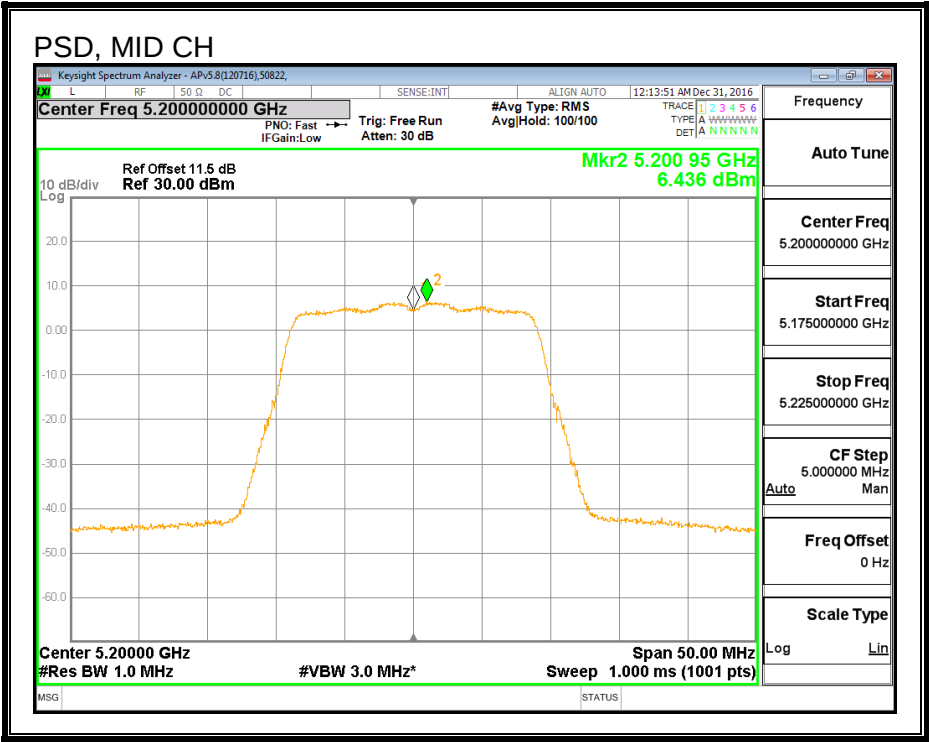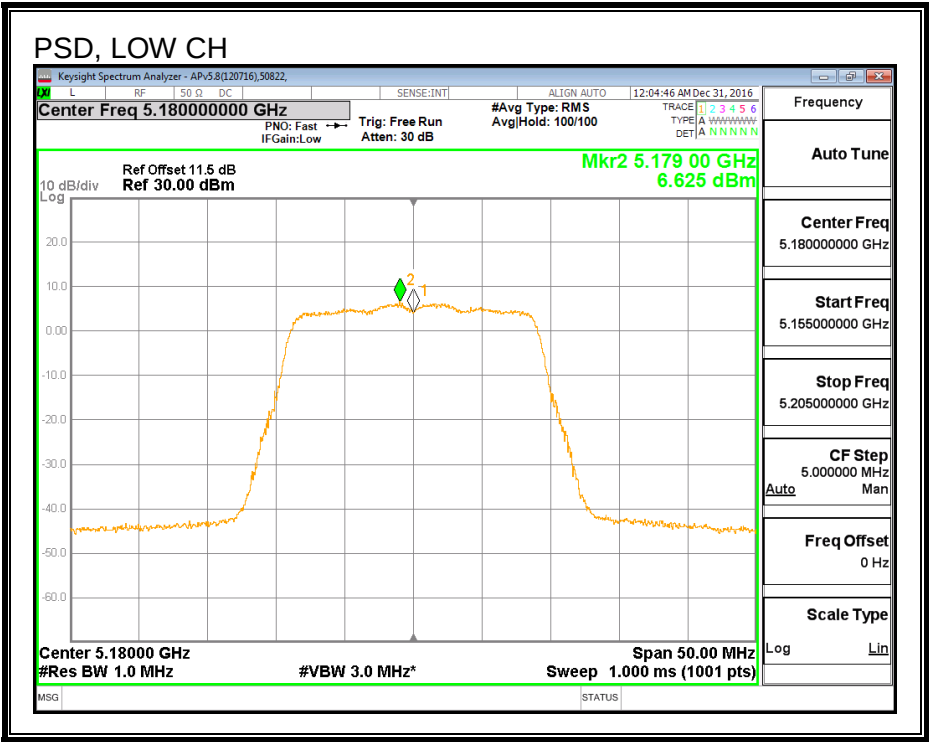

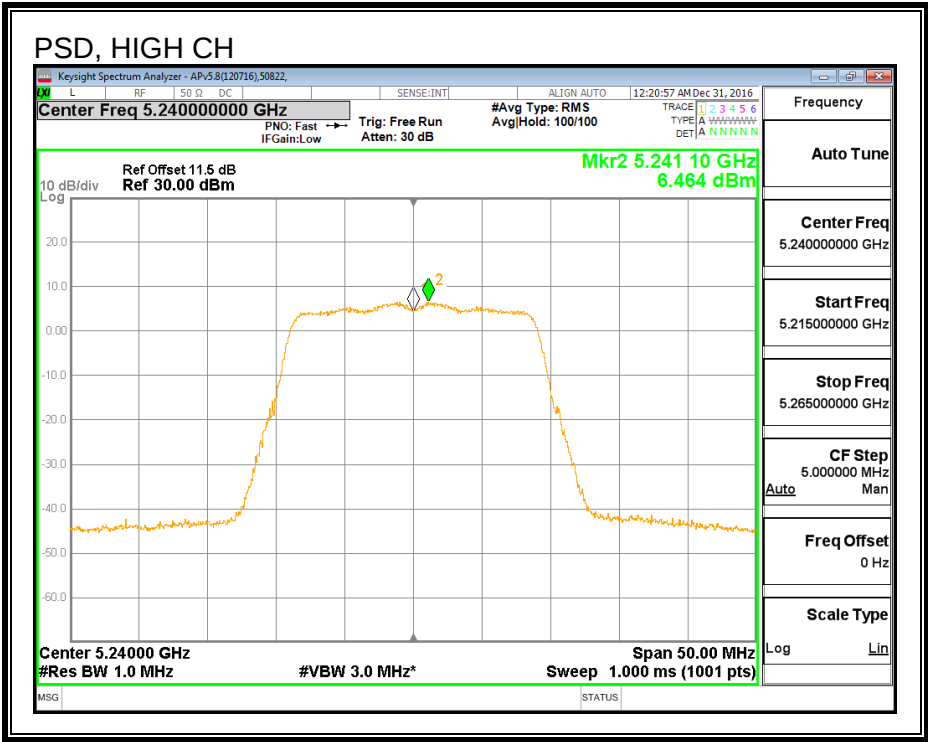

8.2. 802.11n HT20 ANTENNA B MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.00
Mid	5200	21.84
High	5240	22.12

26 dB BANDWIDTH

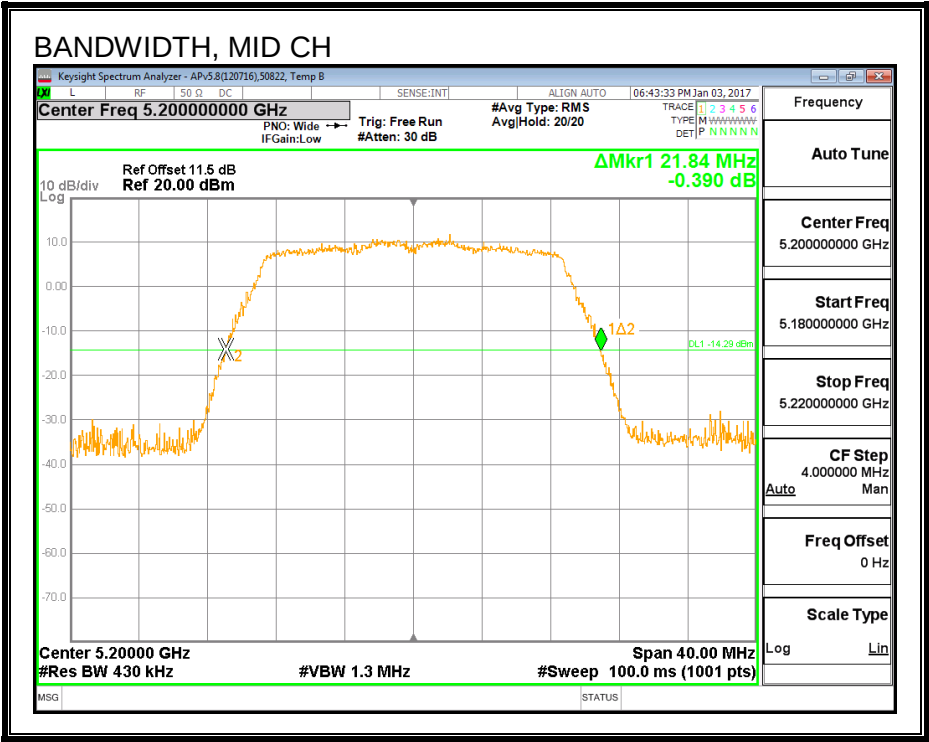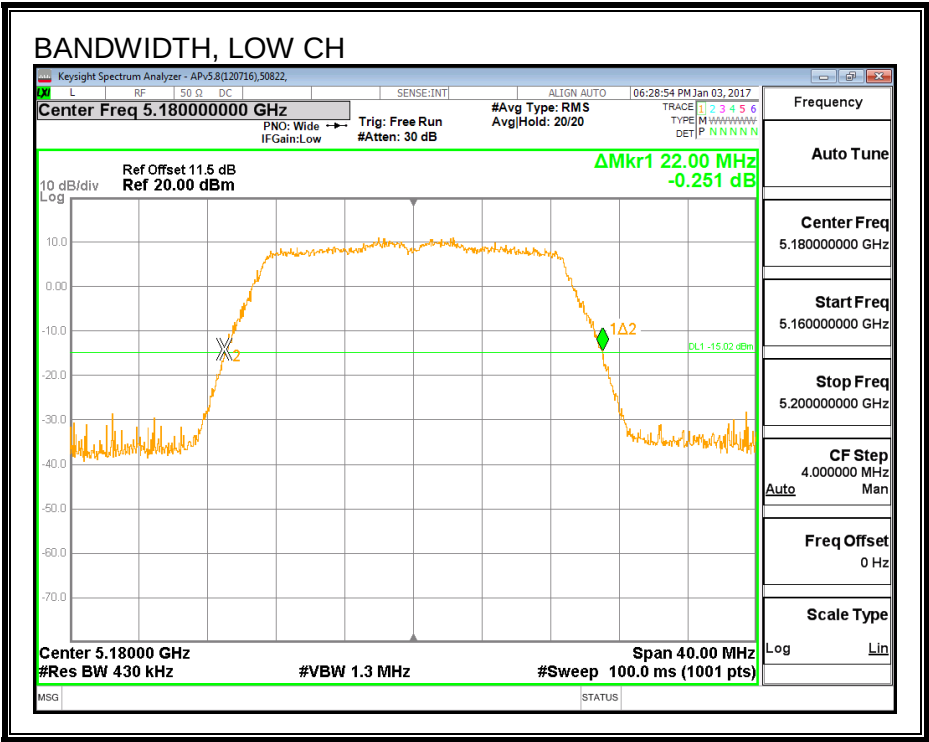

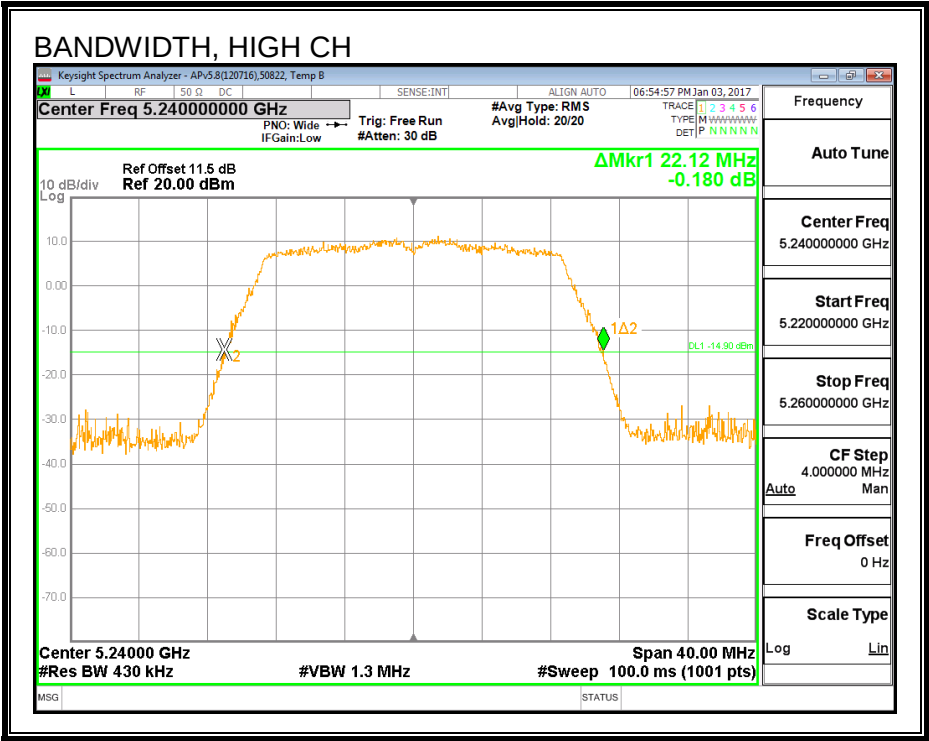

8.2.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.735
Mid	5200	17.654
High	5240	17.670

99% BANDWIDTH

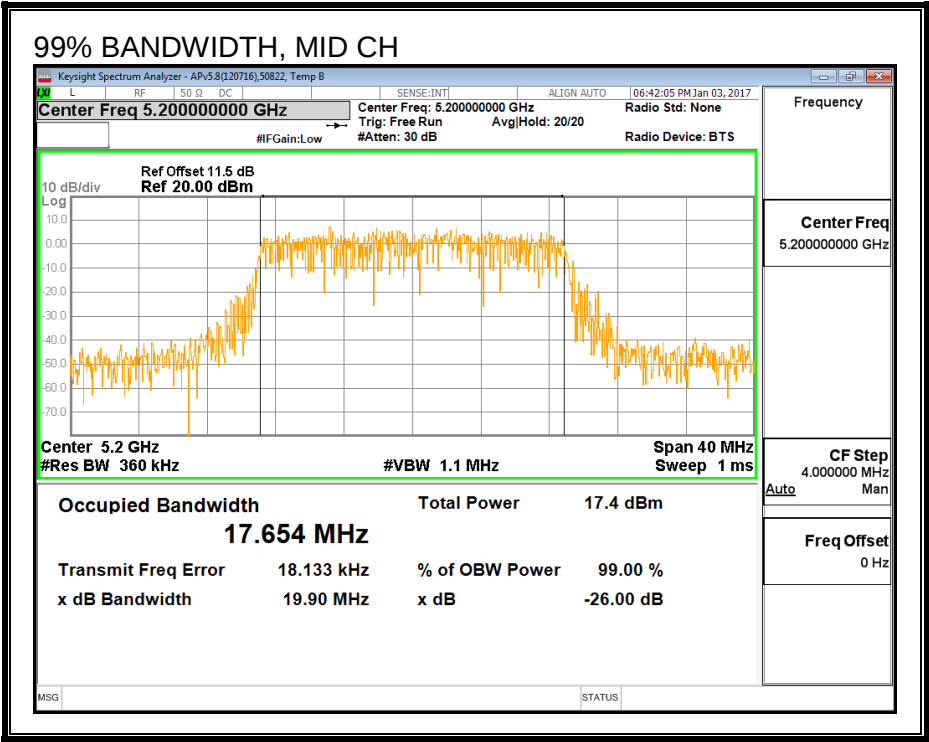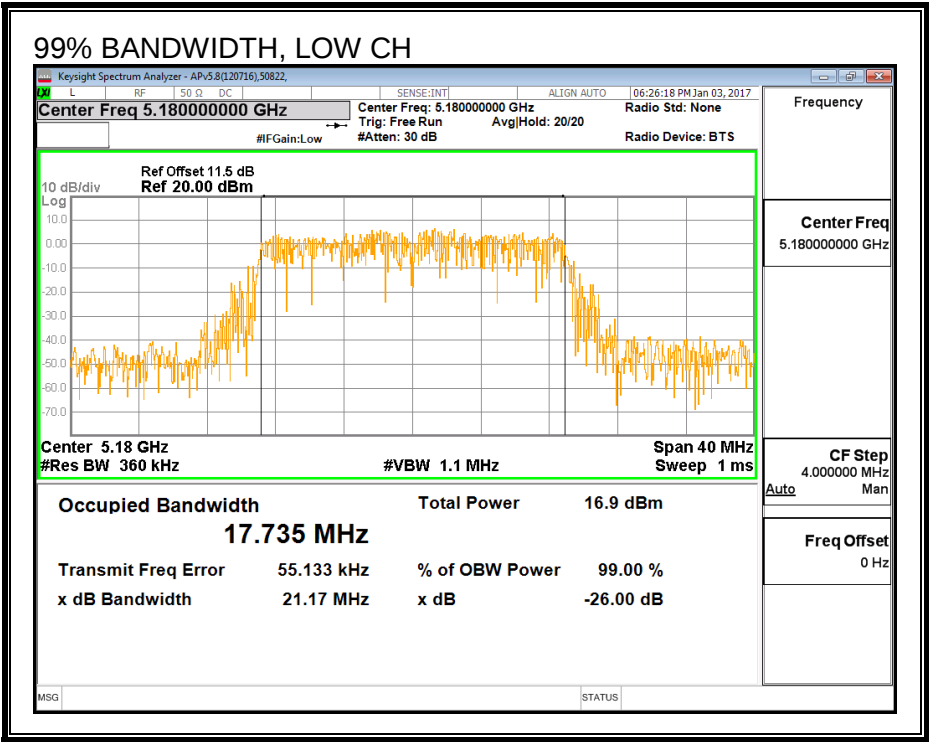

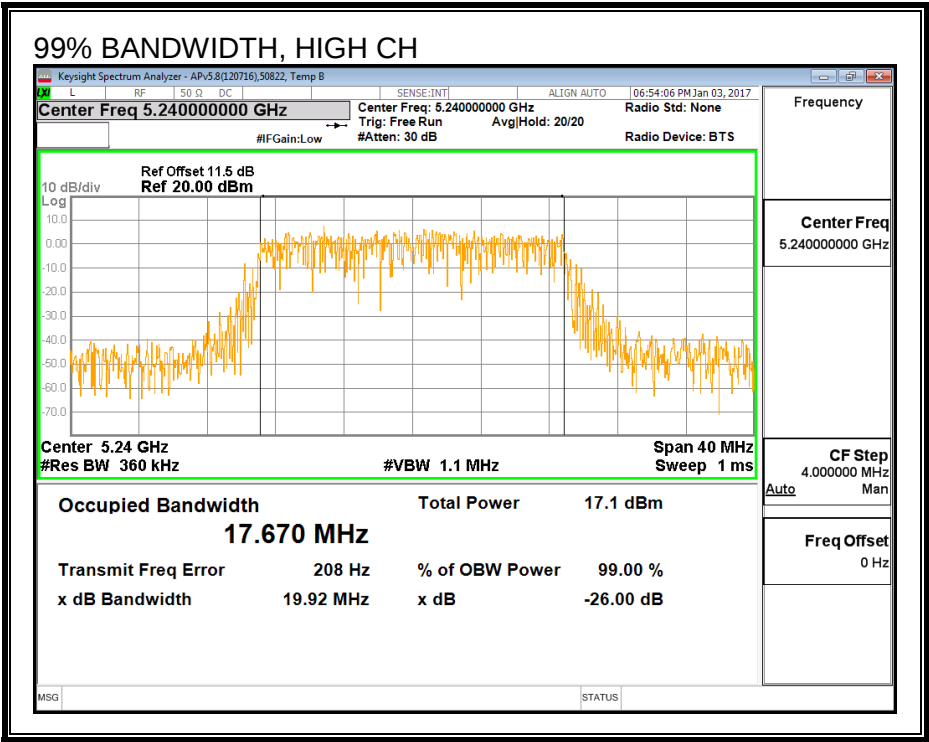

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	45256	Date:	1/20/17
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.84
Mid	5200	16.79
High	5240	17.00

8.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	45256	Date:	1/20/17
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	2.65	2.65	24.00	11.00
Mid	5200	2.65	2.65	24.00	11.00
High	5240	2.65	2.65	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Ant B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.84	15.84	24.00	-8.16
Mid	5200	16.79	16.79	24.00	-7.21
High	5240	17.00	17.00	24.00	-7.00

PSD Results

Channel	Frequency (MHz)	Ant B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.69	6.69	11.00	-4.31
Mid	5200	6.62	6.62	11.00	-4.39
High	5240	6.41	6.41	11.00	-4.59

PSD

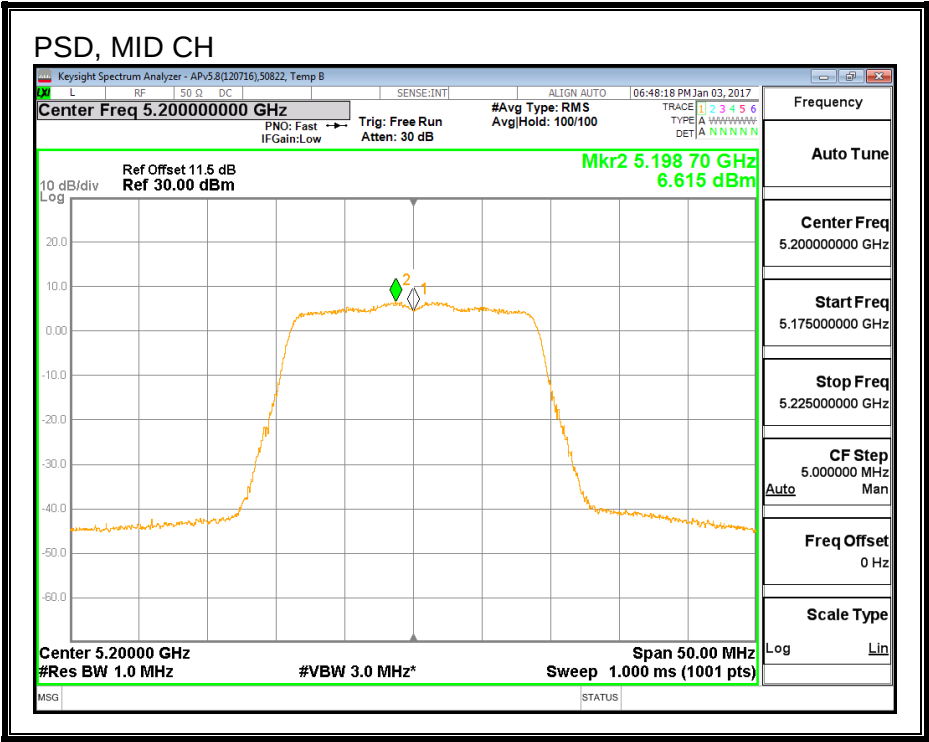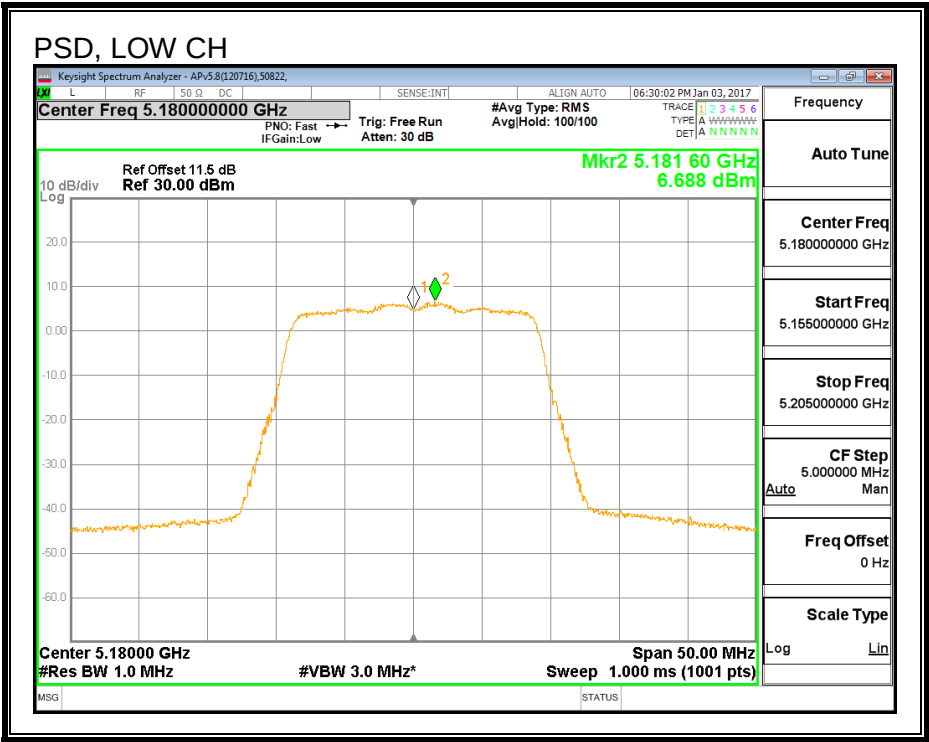

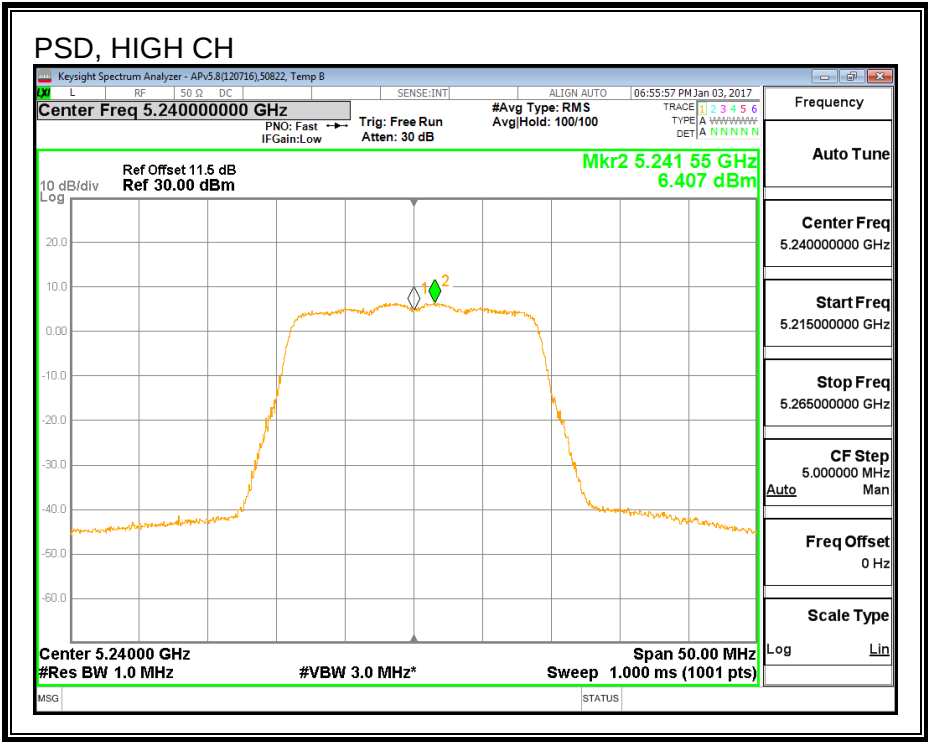

8.3. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND



8.3.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.


RESULTS



Channel	Frequency (MHz)	26 dB BW Ant A (MHz)	26 dB BW Ant B (MHz)
Low	5180	21.96	21.56
Mid	5200	21.96	21.60
High	5240	22.04	21.56

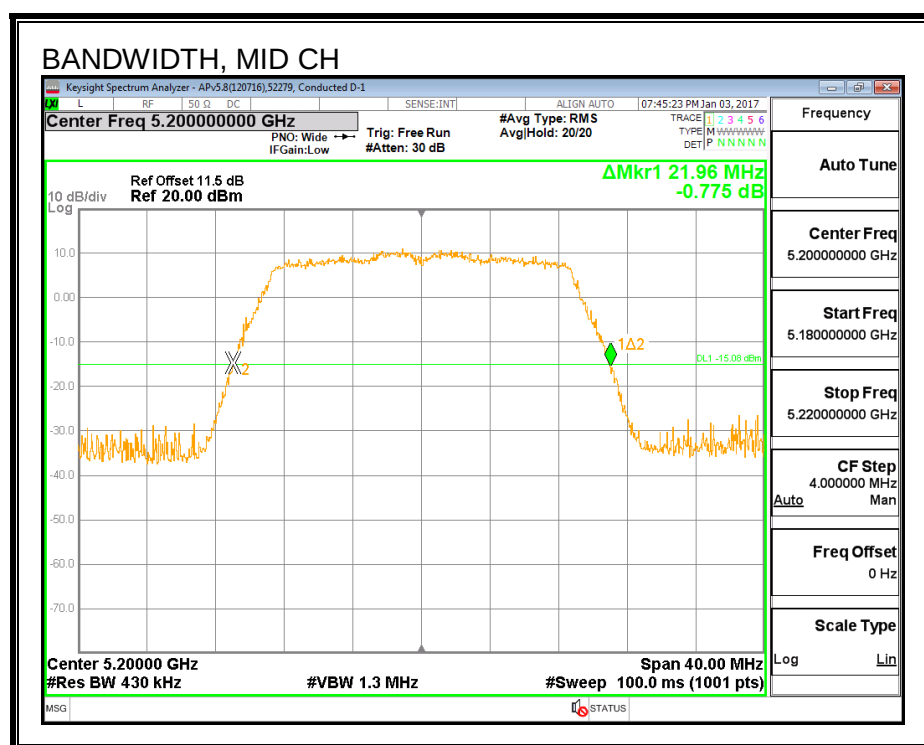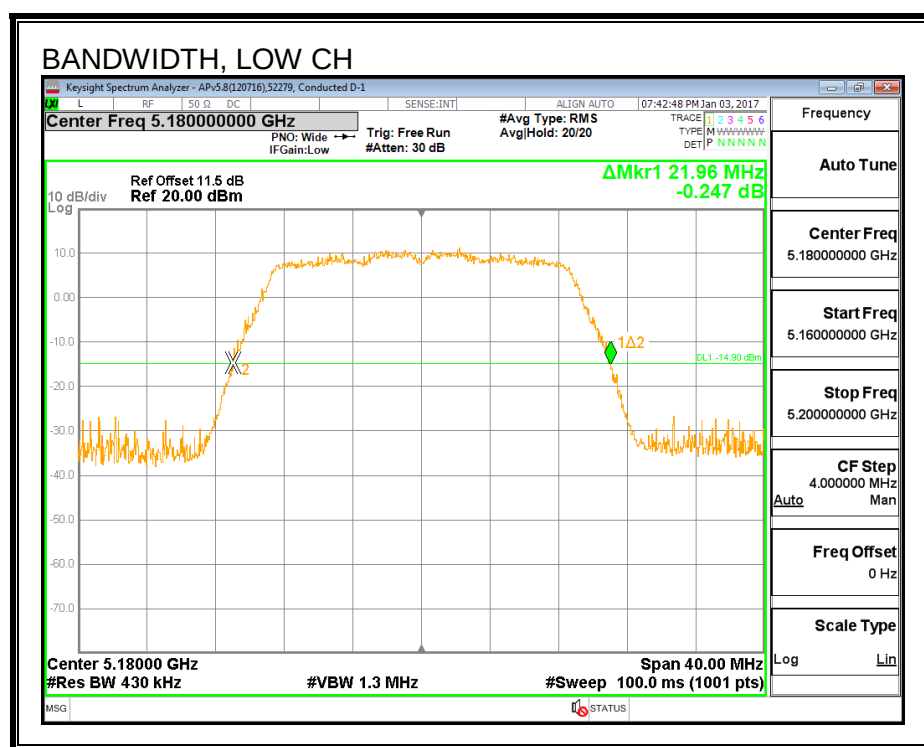

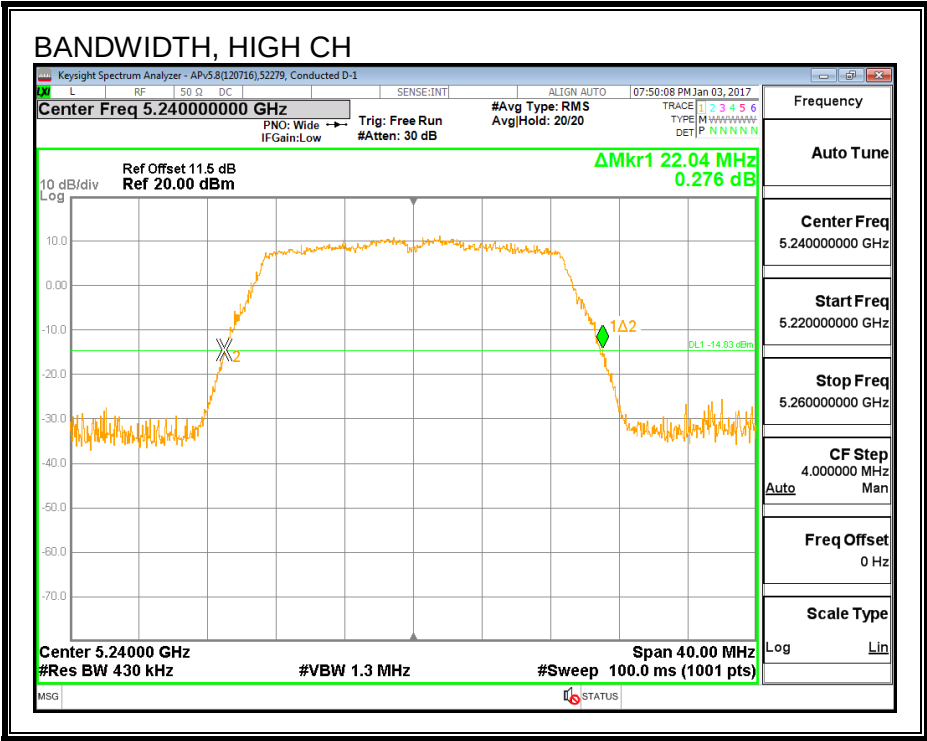

26 DB BANDWIDTH, ANTENNA B

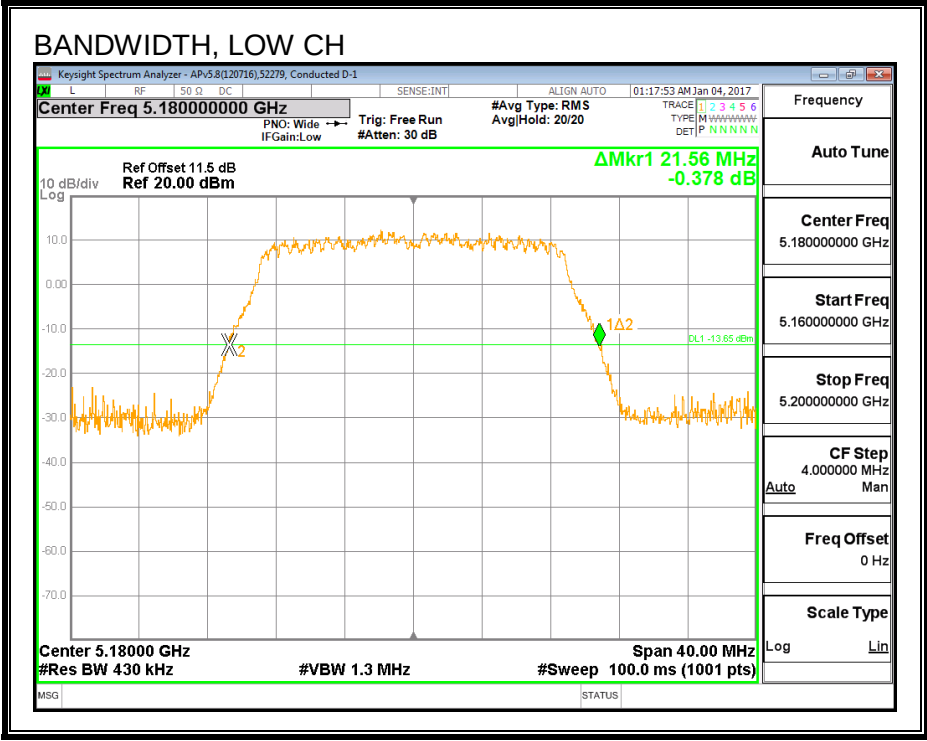

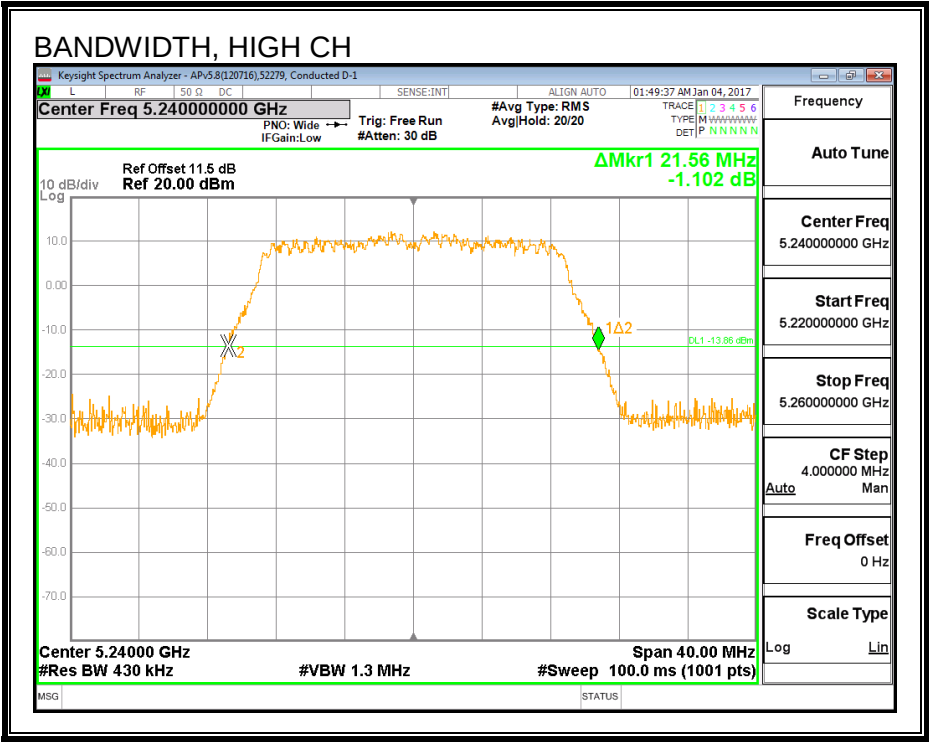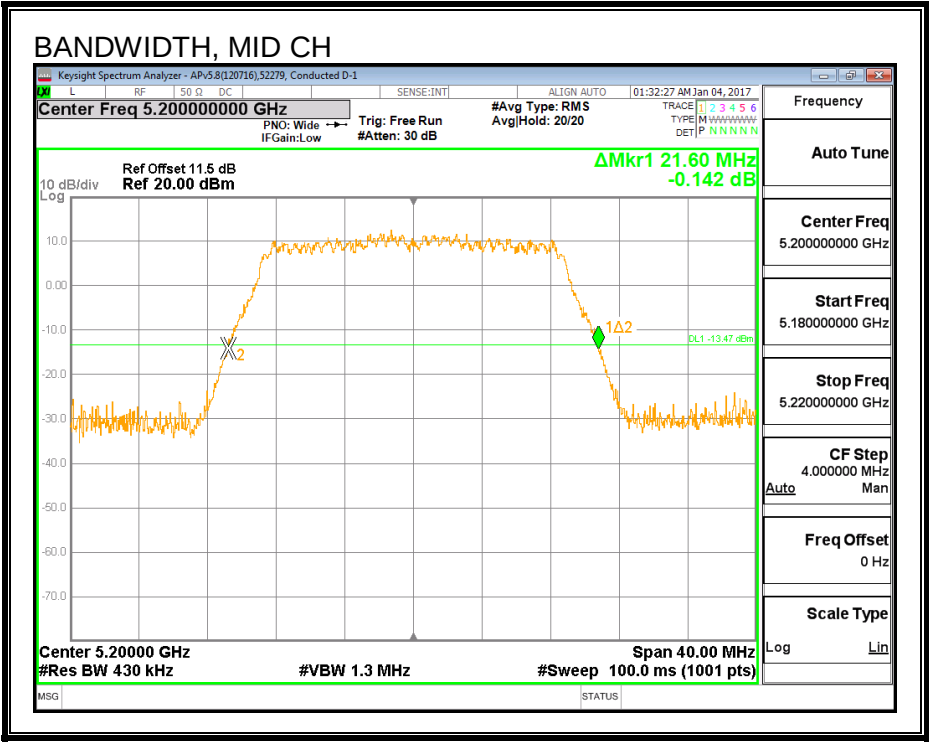

8.3.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Ant A (MHz)	99% BW Ant B (MHz)
Low	5180	17.634	17.624
Mid	5200	17.687	17.807
High	5240	17.721	17.708



99% BANDWIDTH, ANTENNA A

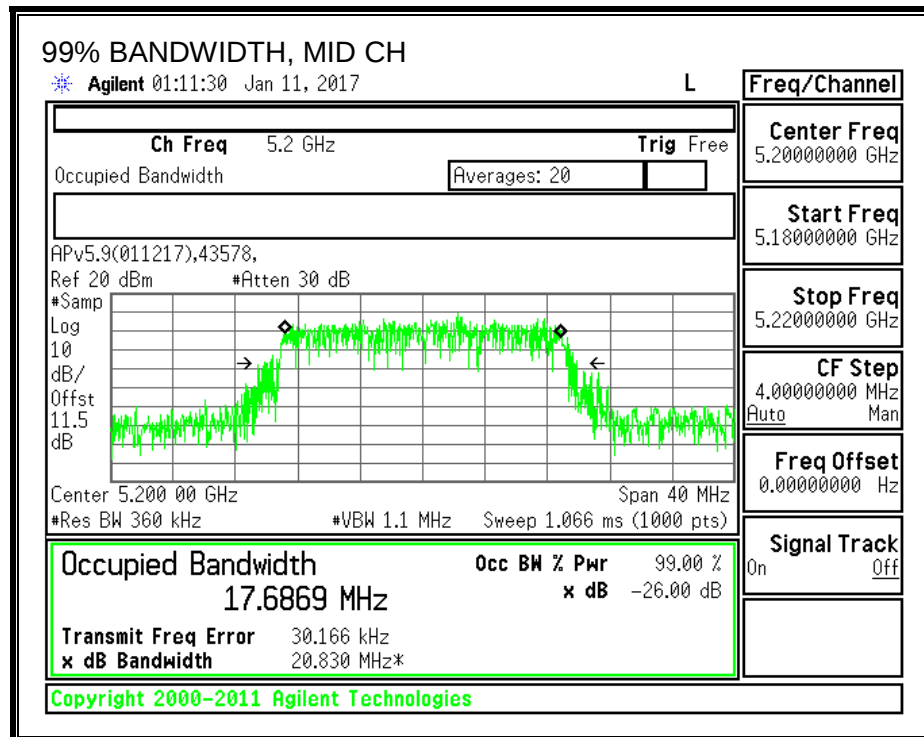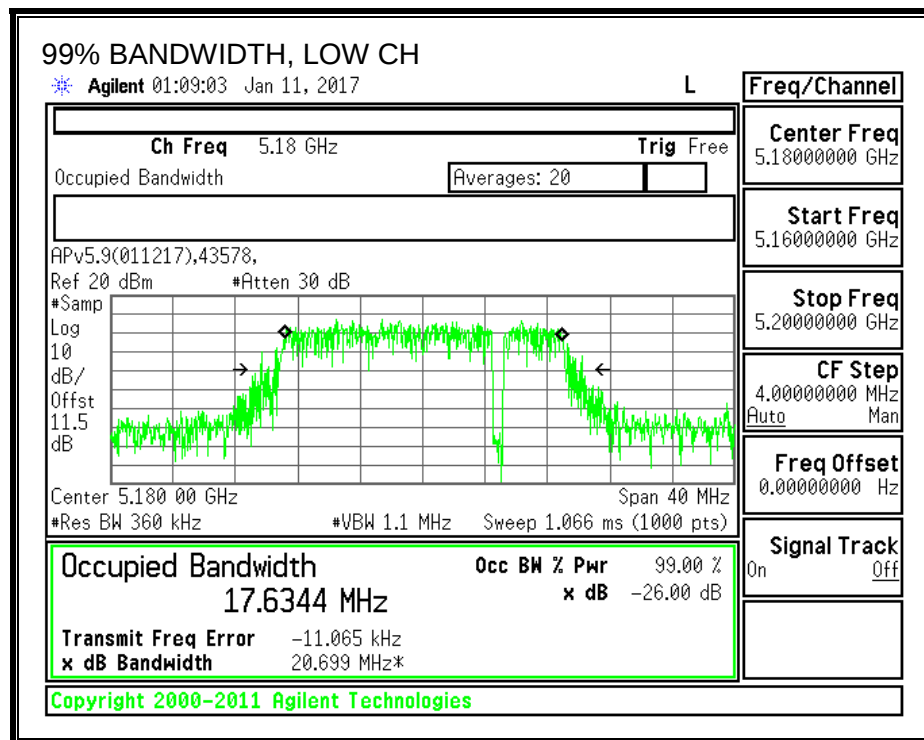

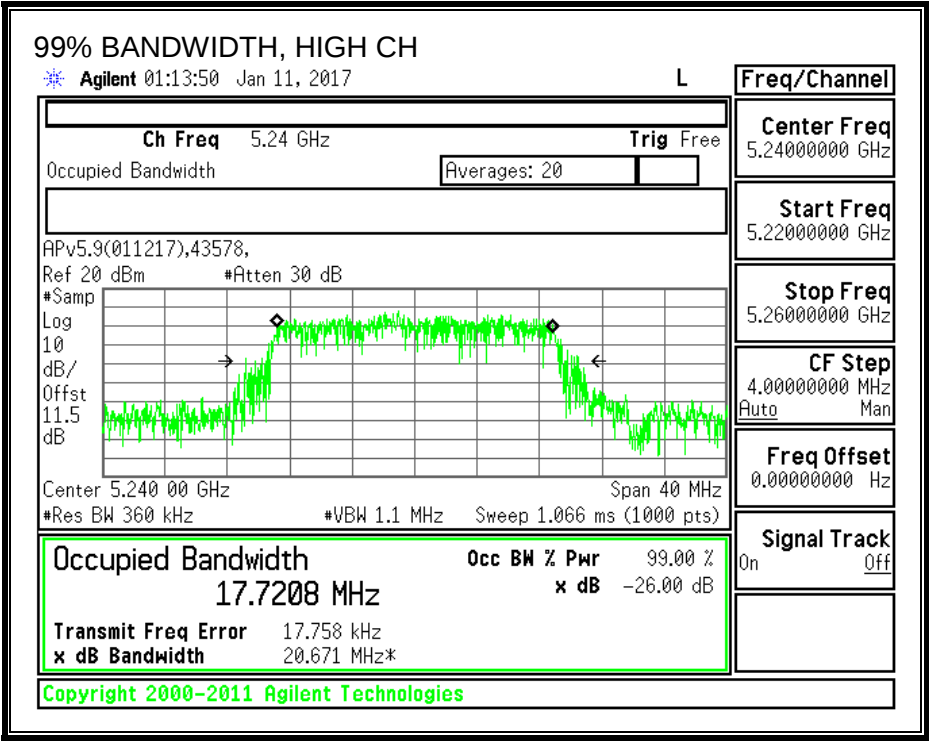

99% BANDWIDTH, ANTENNA B

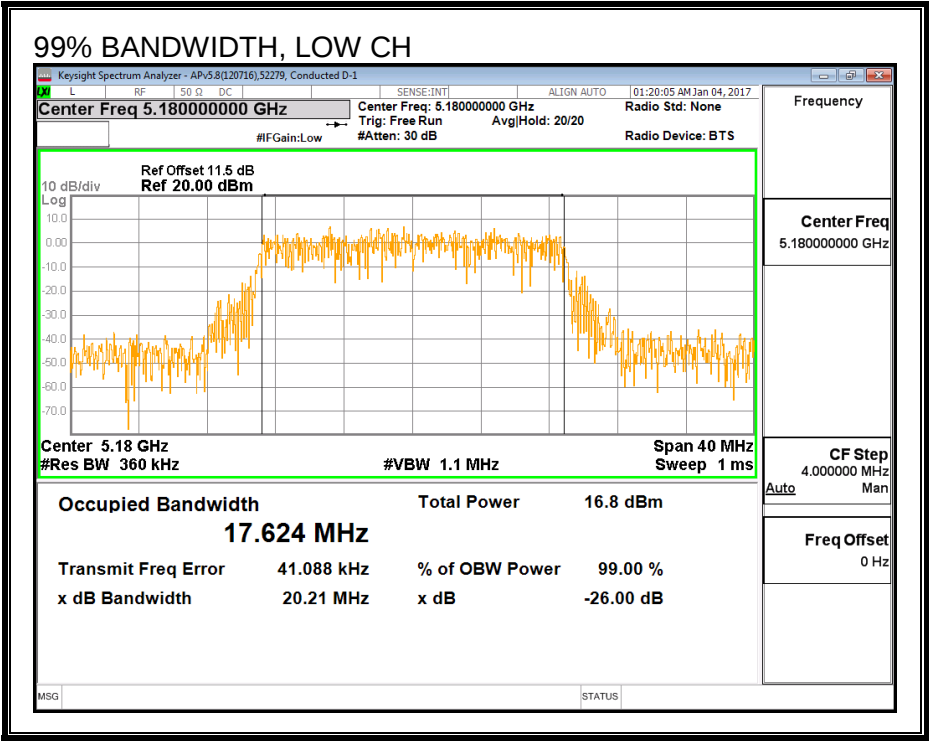

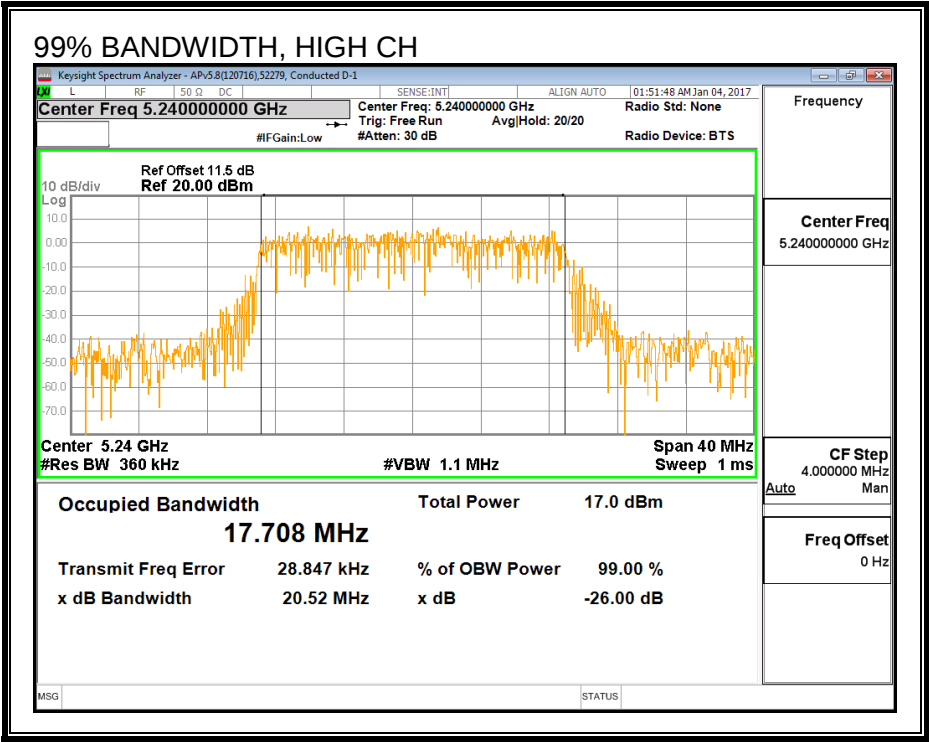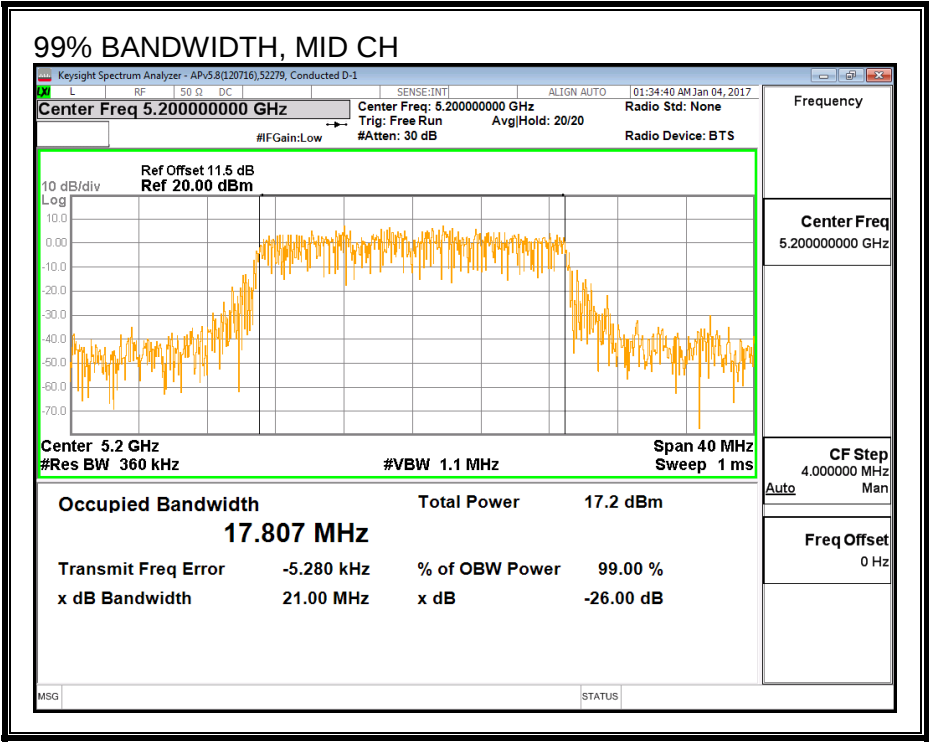

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	45256	Date:	1/20/17
------------	-------	--------------	---------

Average Power Results

Channel	Frequency (MHz)	Ant A Power (dBm)	Ant B Power (dBm)	Total Power (dBm)
Low	5180	14.97	14.77	17.88
Mid	5200	16.44	16.50	19.48
High	5240	16.42	16.30	19.37

8.3.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Ant A Antenna Gain (dBi)	Ant B Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
1.66	2.65	2.18

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Ant A Antenna Gain (dBi)	Ant B Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
1.66	2.65	5.18

RESULTS

ID:	45256	Date:	1/20/17
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	2.18	5.18	24.00	11.00
Mid	5200	2.18	5.18	24.00	11.00
High	5240	2.18	5.18	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Ant A Meas Power (dBm)	Ant B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.97	14.77	17.88	24.00	-6.12
Mid	5200	16.44	16.50	19.48	24.00	-4.52
High	5240	16.42	16.30	19.37	24.00	-4.63

PSD Results


Channel	Frequency (MHz)	Ant A Meas PSD (dBm)	Ant B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.30	6.30	9.31	11.00	-1.69
Mid	5200	6.44	6.29	9.38	11.00	-1.62
High	5240	6.37	6.33	9.36	11.00	-1.64



PSD, ANTENNA A

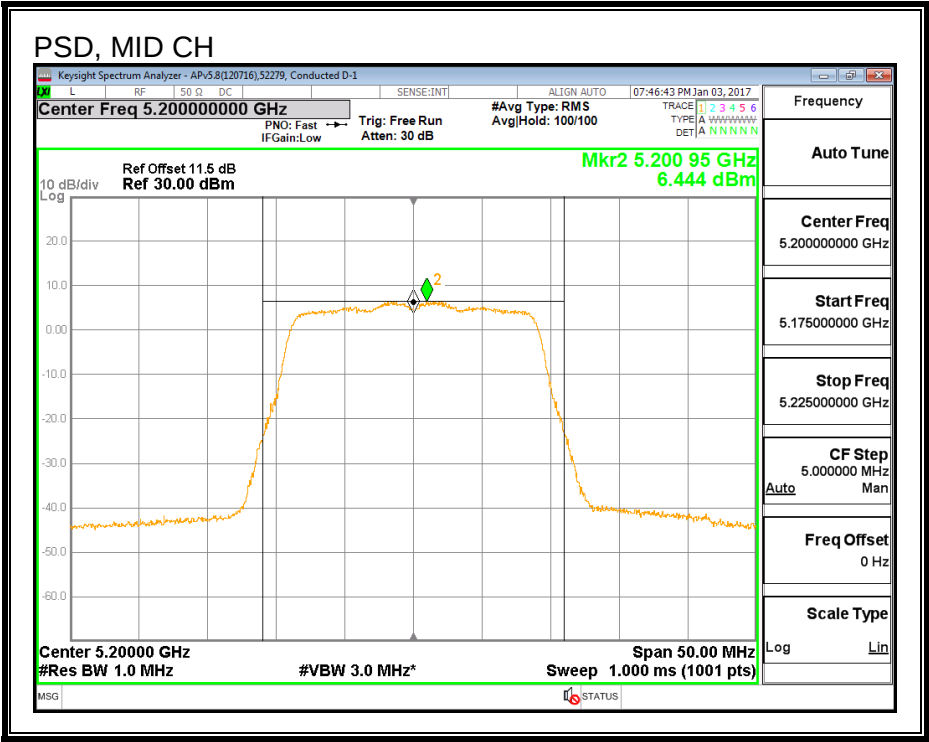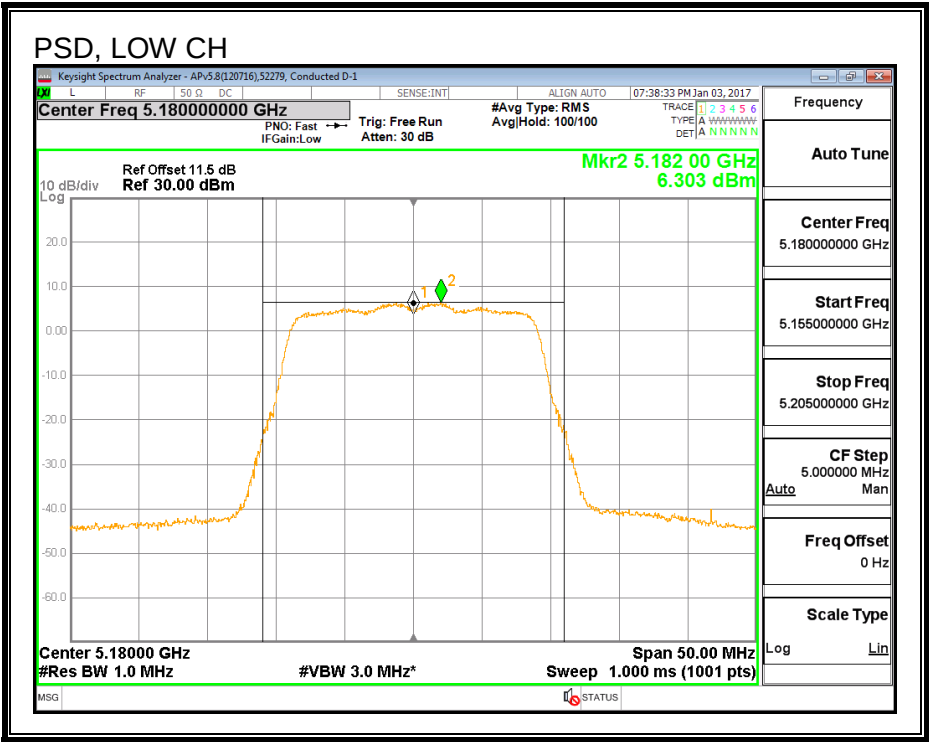

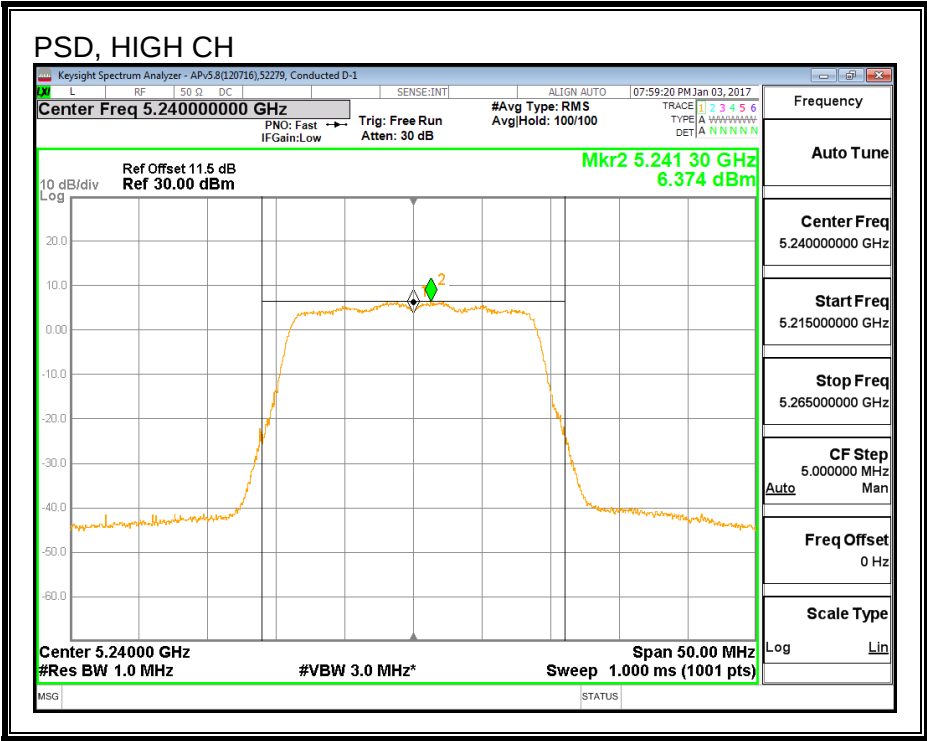

PSD, ANTENNA B

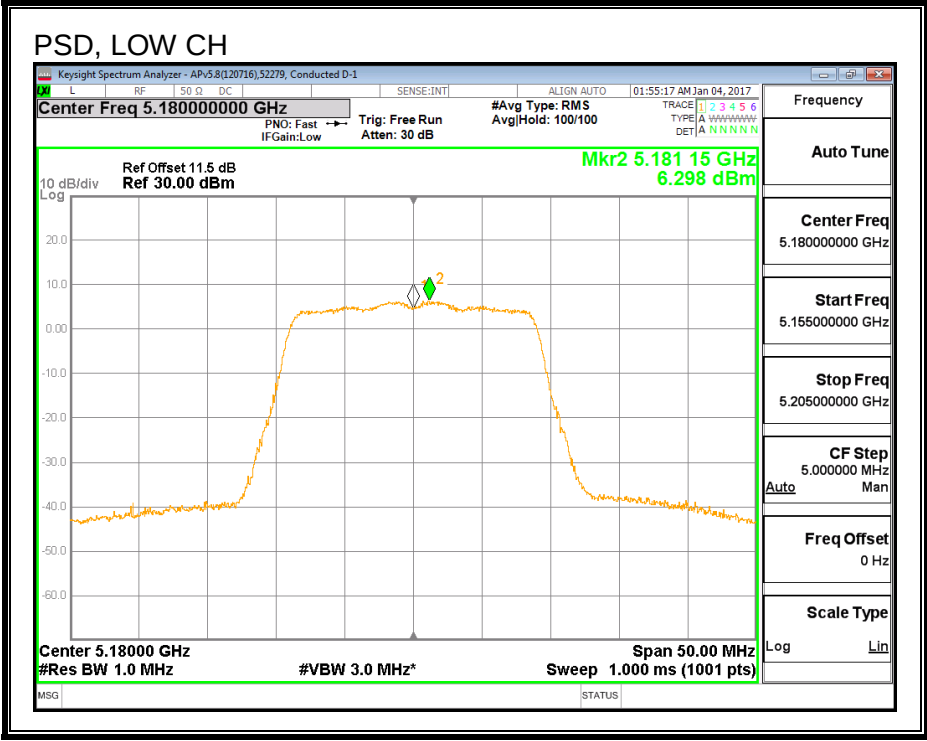

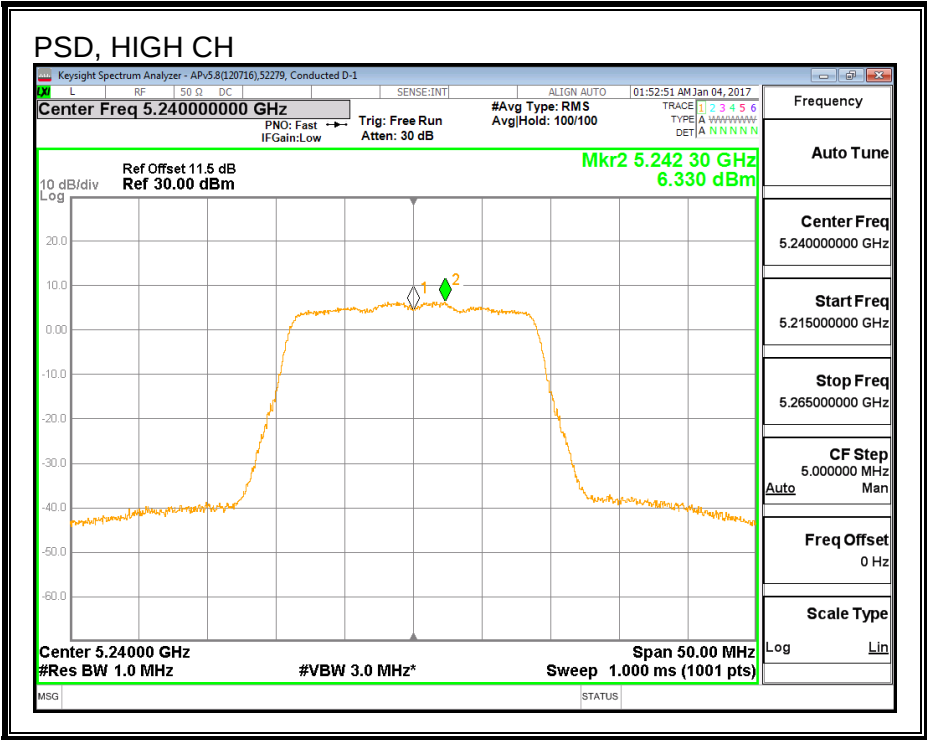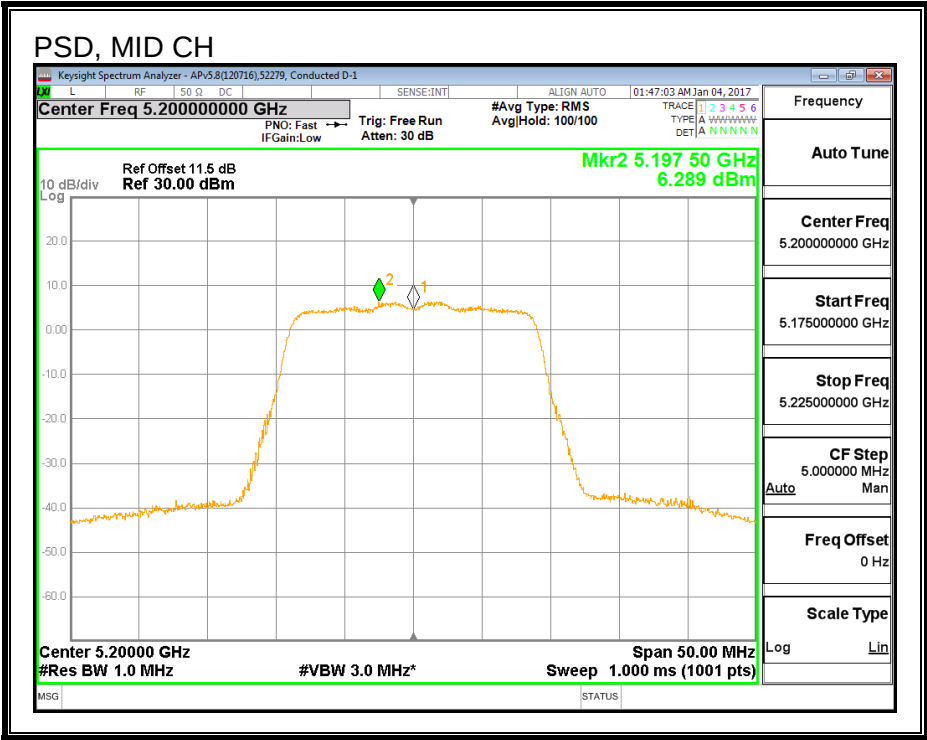

8.4. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND

8.4.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Ant A (MHz)	26 dB BW Ant B (MHz)
Low	5180	21.84	21.68
Mid	5200	21.88	21.72
High	5240	21.96	21.64



26 DB BANDWIDTH, ANTENNA A

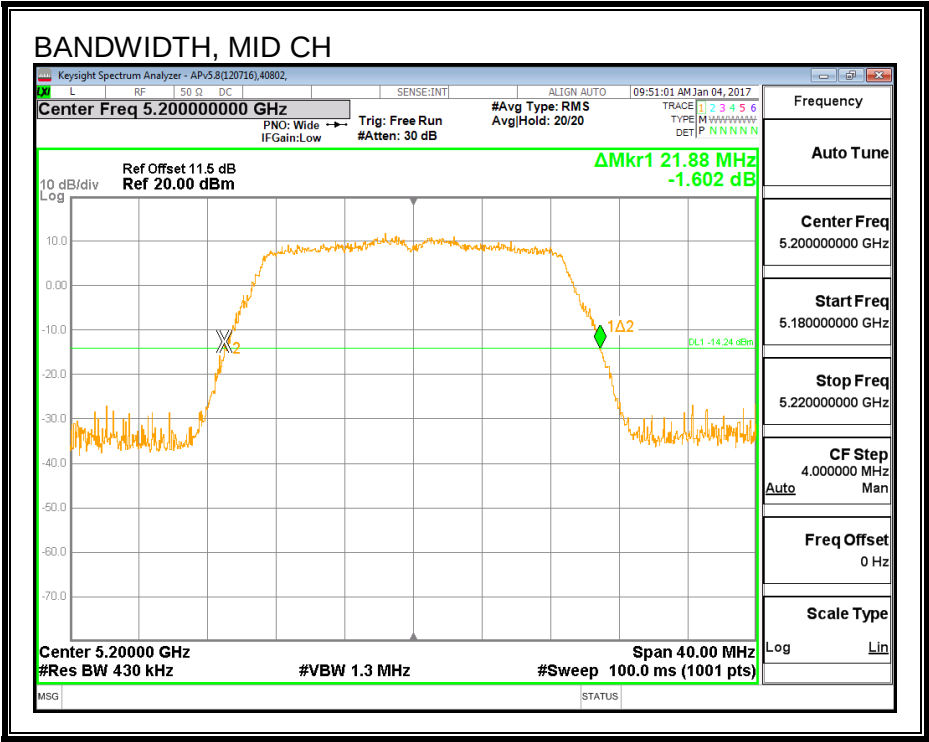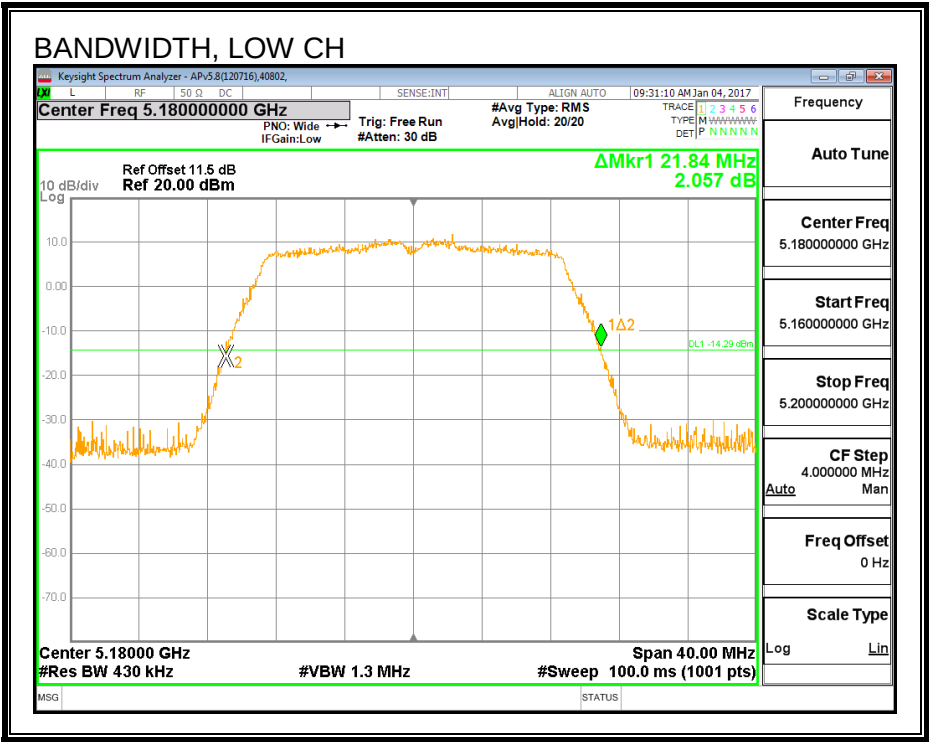

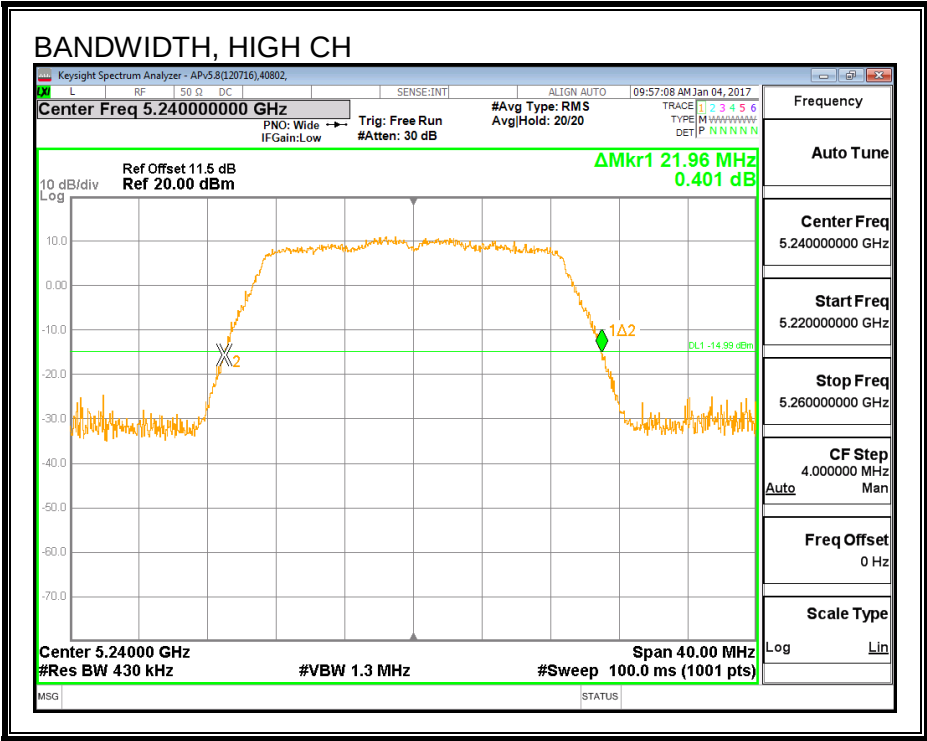

26 DB BANDWIDTH, ANTENNA B

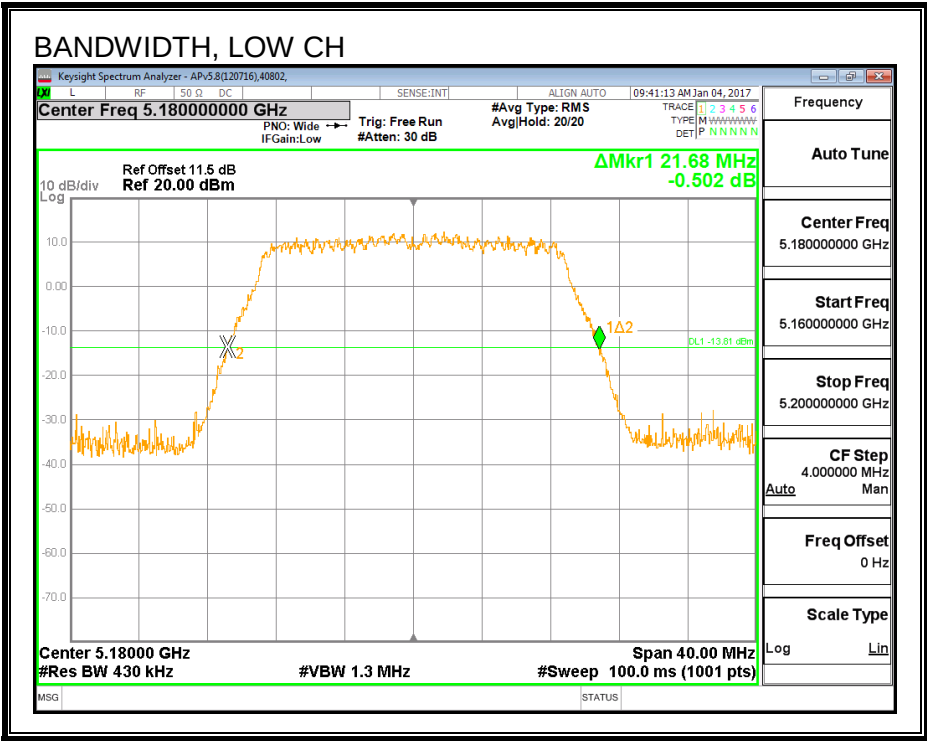

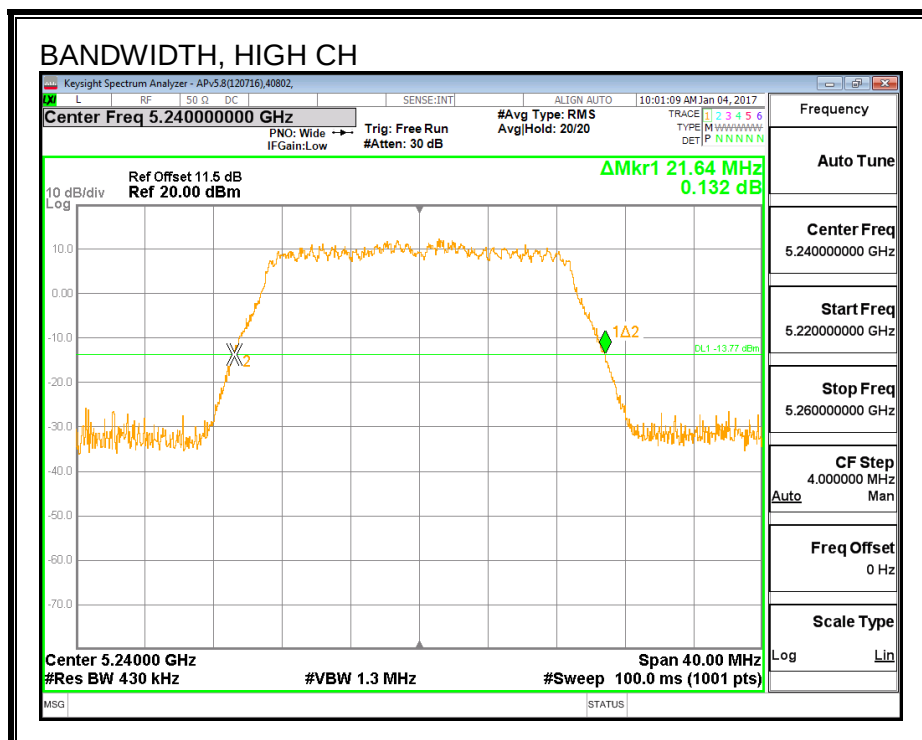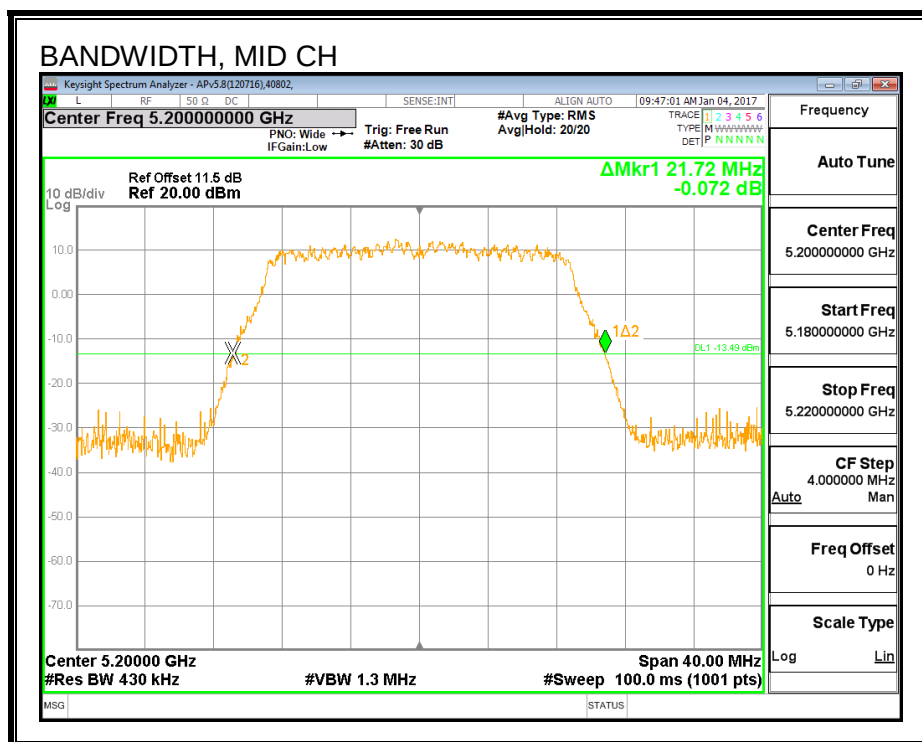

8.4.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Ant A (MHz)	99% BW Ant B (MHz)
Low	5180	17.756	17.687
Mid	5200	17.810	17.747
High	5240	17.623	17.646



99% BANDWIDTH, ANTENNA A

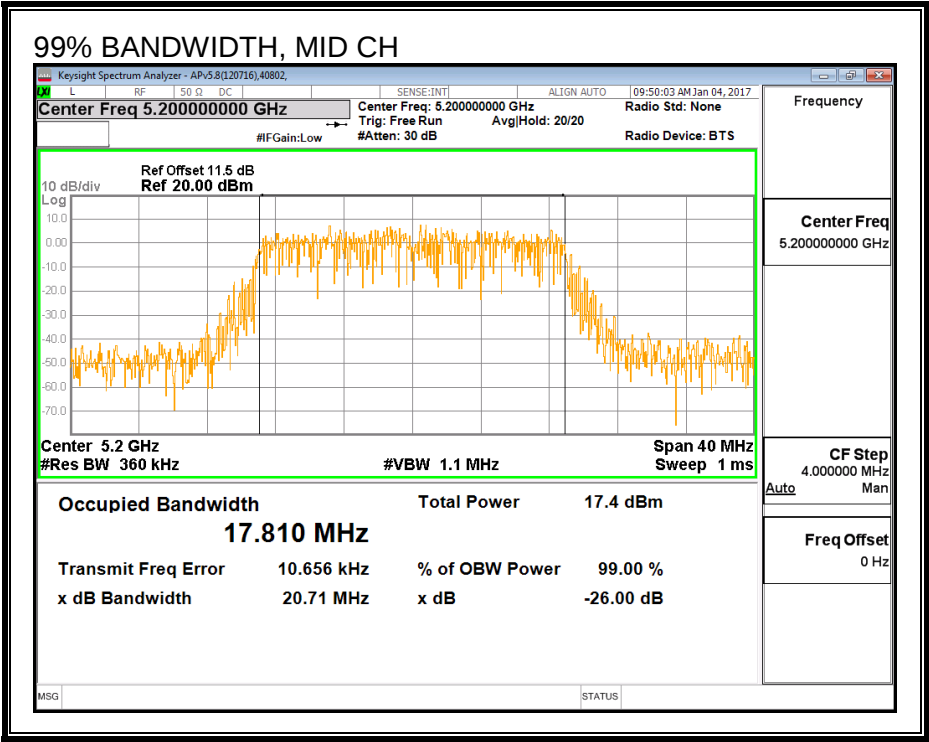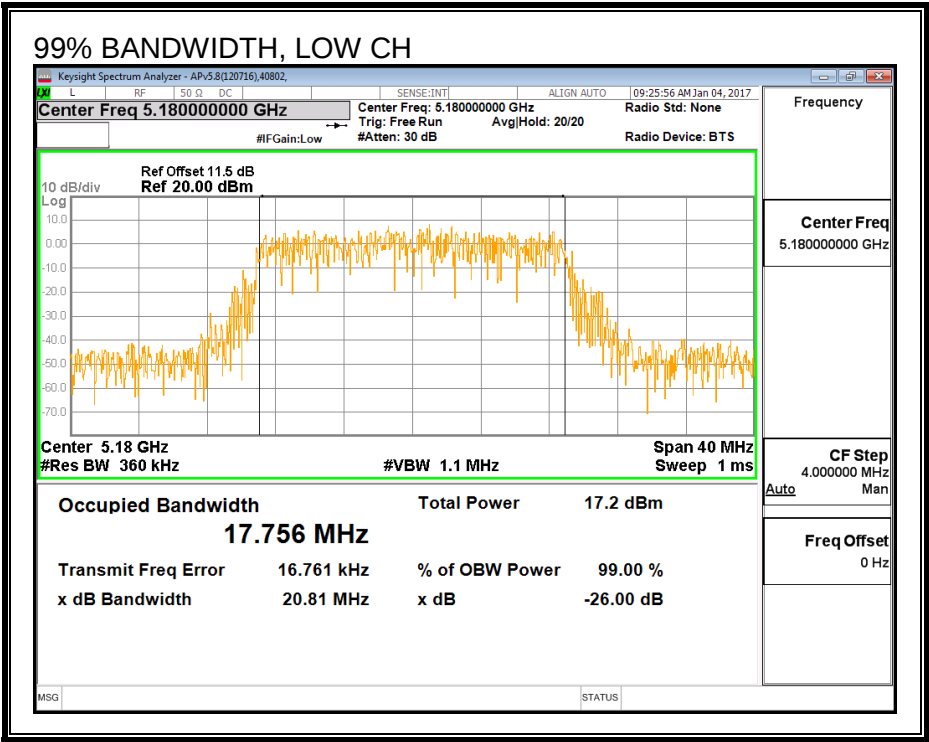

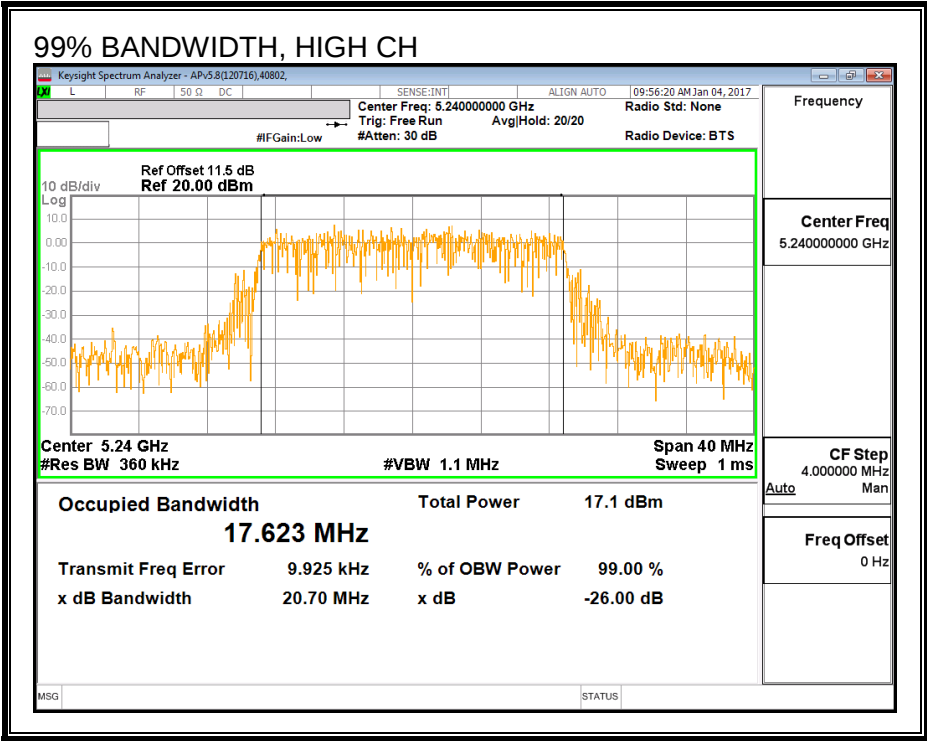

99% BANDWIDTH, ANTENNA B

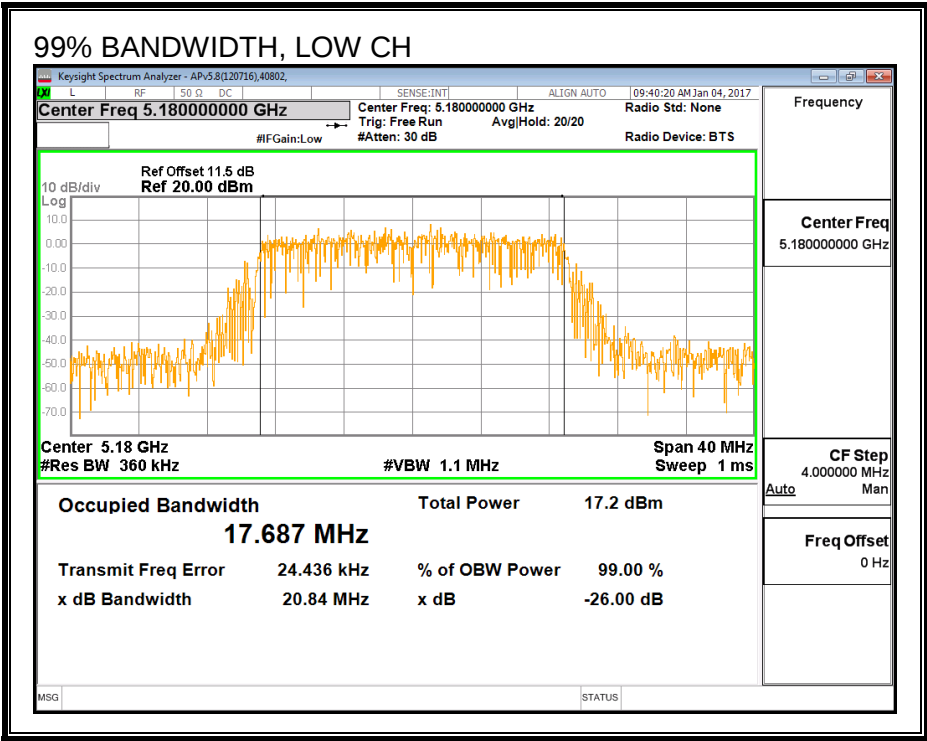

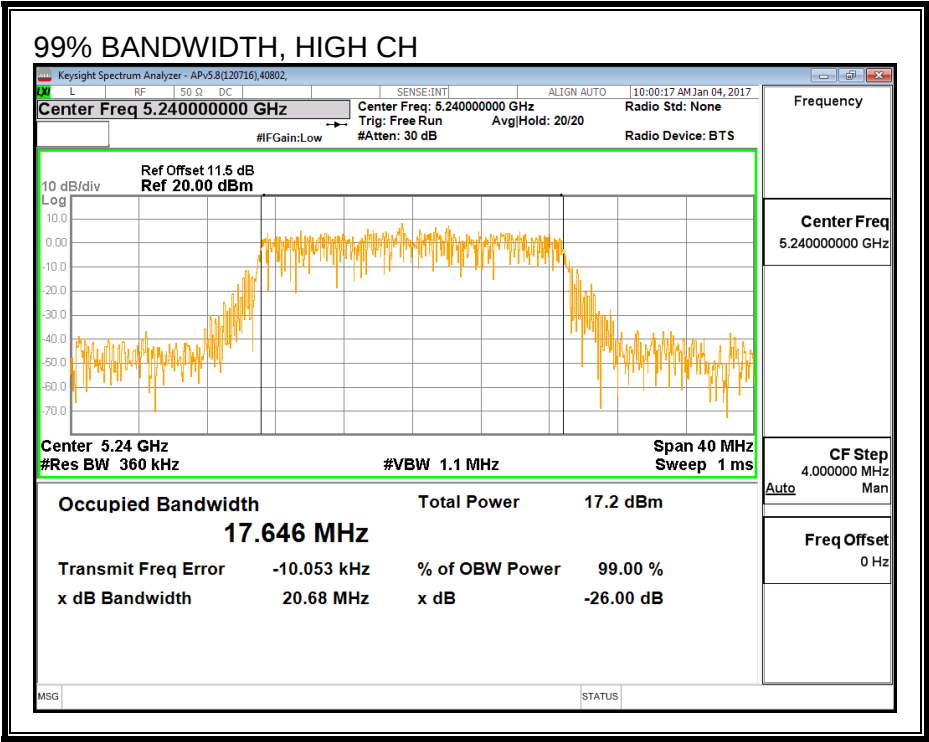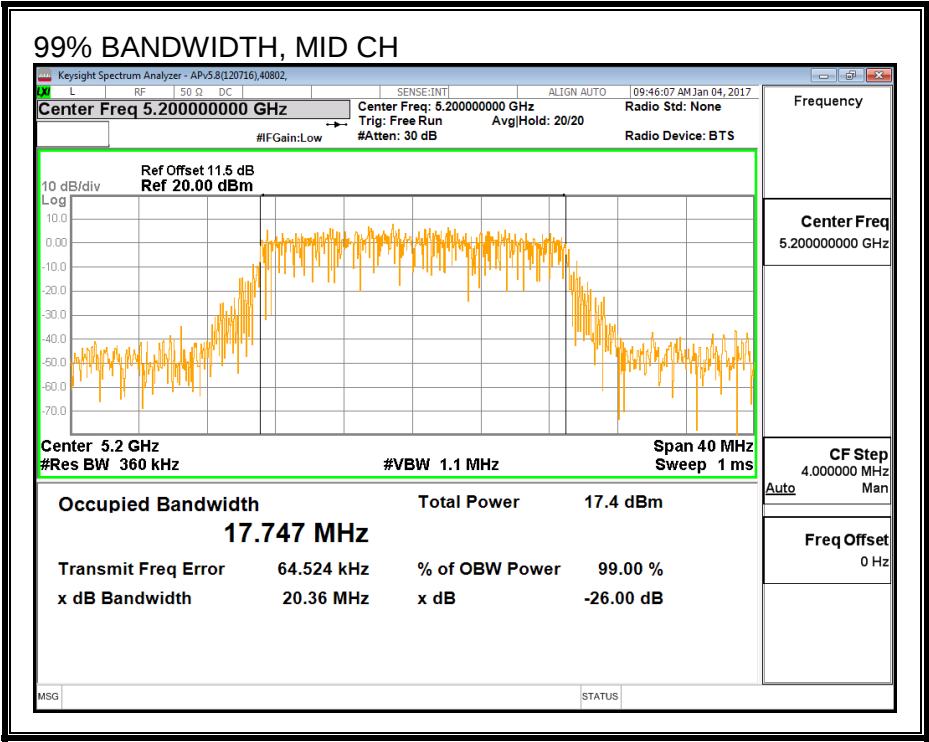

8.4.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	1/30/17
------------	-------	--------------	---------

Average Power Results

Channel	Frequency (MHz)	Ant A Power (dBm)	Ant B Power (dBm)	Total Power (dBm)
Low	5180	14.97	14.77	17.88
Mid	5200	16.44	16.98	19.73
High	5240	16.42	16.85	19.65

8.4.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Ant A Antenna Gain (dBi)	Ant B Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
1.66	2.65	2.18

RESULTS

ID:	39472	Date:	1/30/17
-----	-------	-------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	2.18	2.18	24.00	11.00
Mid	5200	2.18	2.18	24.00	11.00
High	5240	2.18	2.18	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Ant A Meas Power (dBm)	Ant B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.97	14.77	17.88	24.00	-6.12
Mid	5200	16.44	16.98	19.73	24.00	-4.27
High	5240	16.42	16.85	19.65	24.00	-4.35

PSD Results


Channel	Frequency (MHz)	Ant A Meas PSD (dBm)	Ant B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.44	6.60	9.53	11.00	-1.47
Mid	5200	7.03	6.69	9.87	11.00	-1.13
High	5240	6.83	6.51	9.68	11.00	-1.32



PSD, ANTENNA A

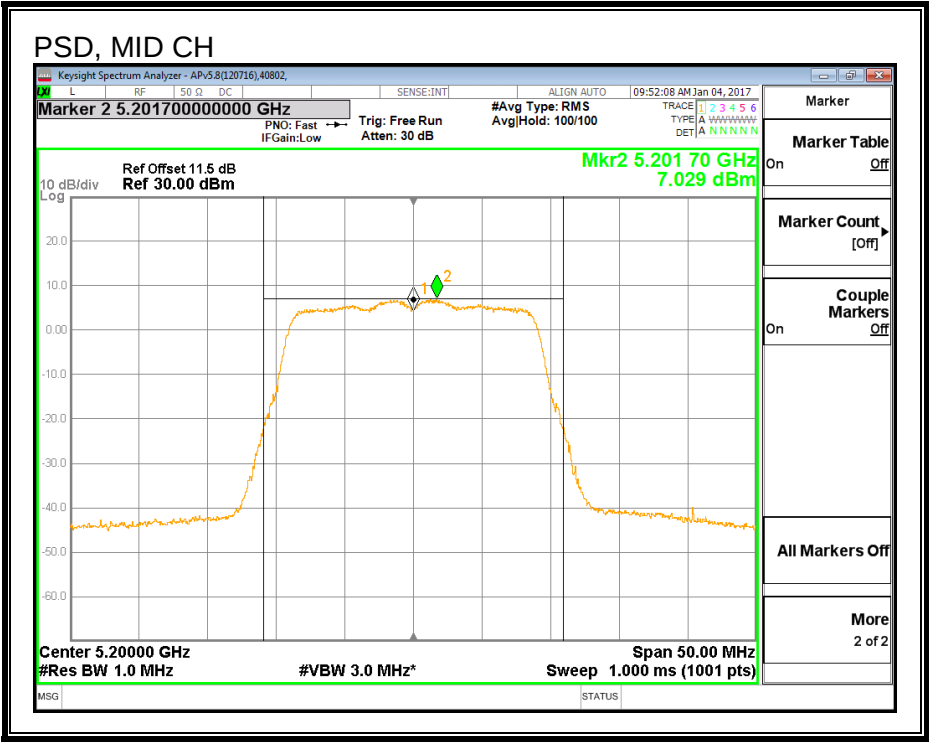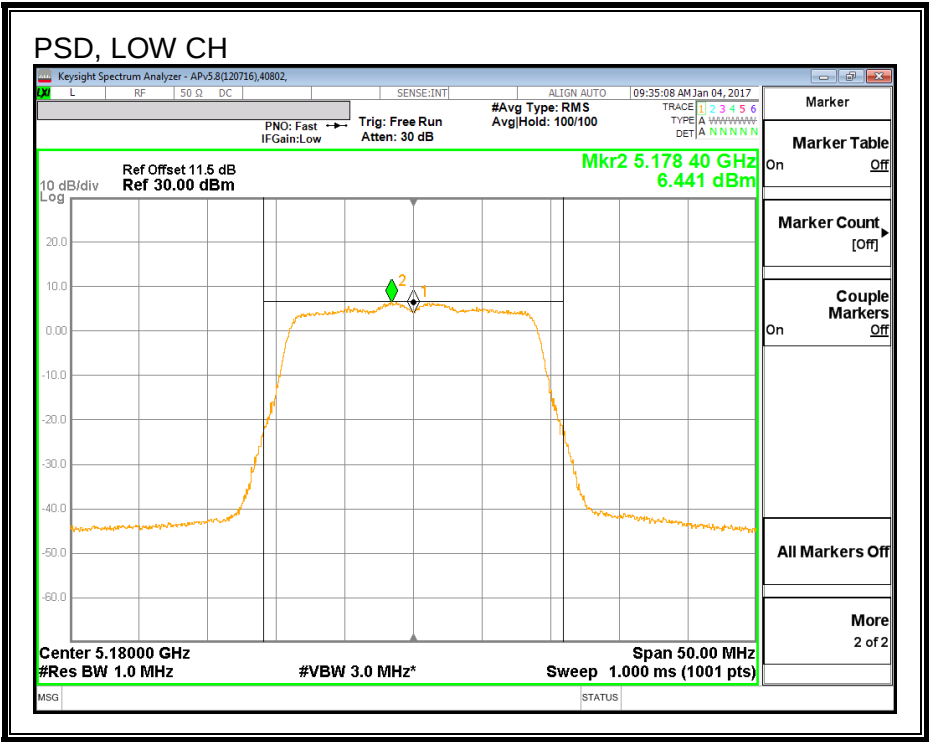

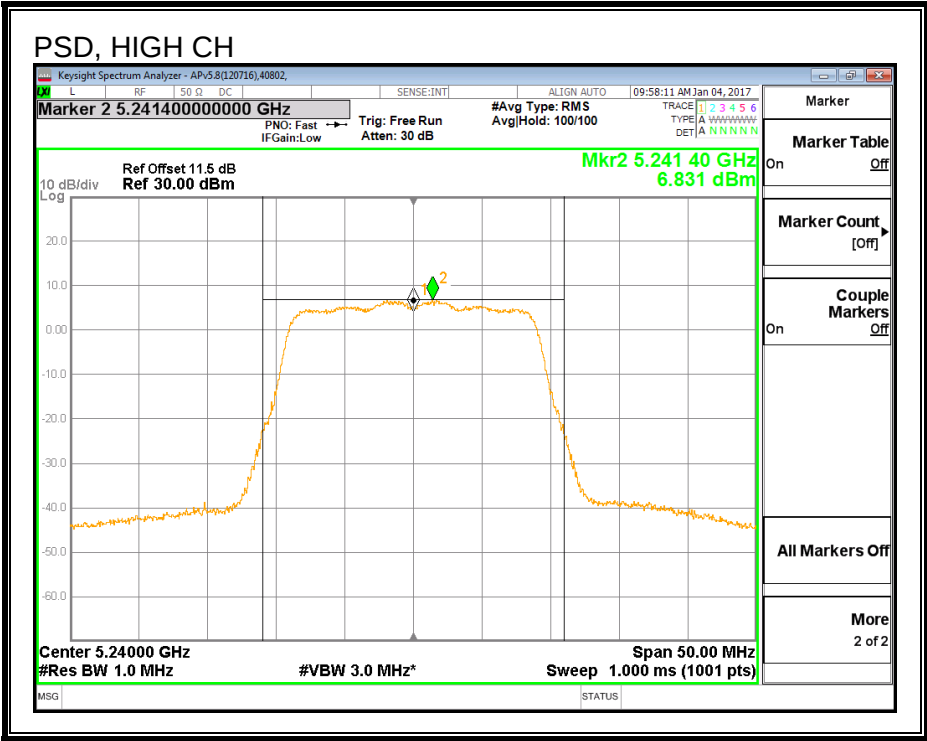

PSD, ANTENNA B

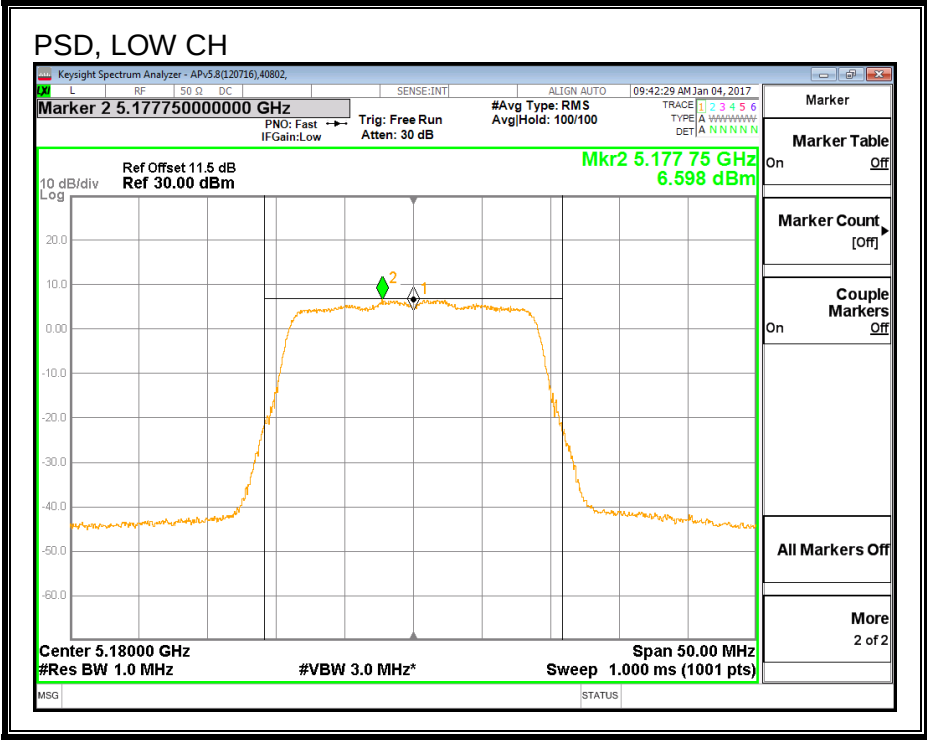

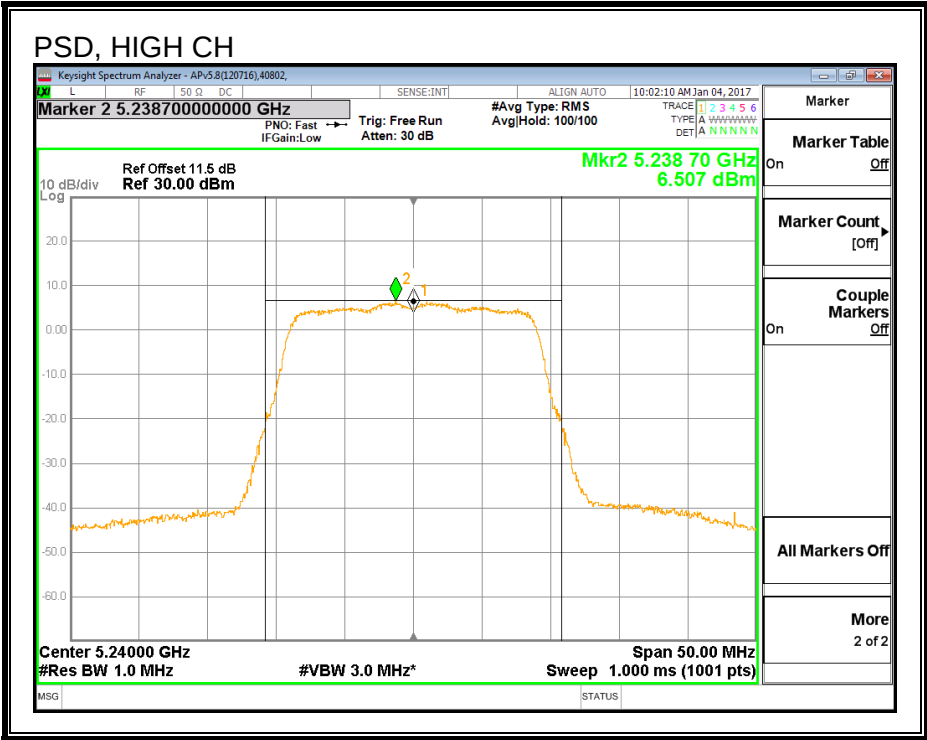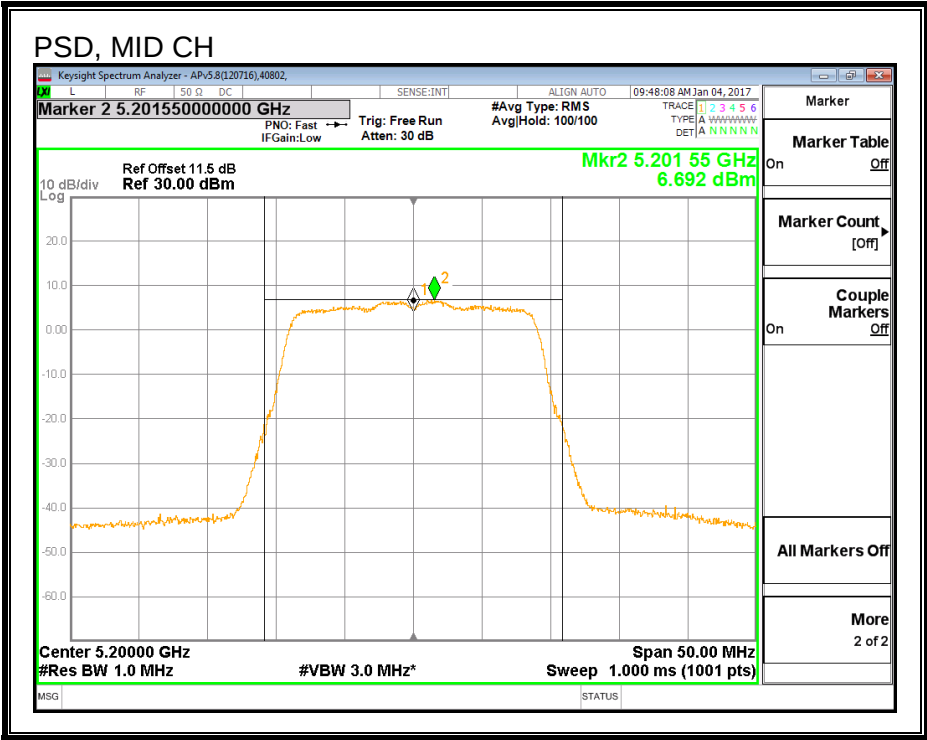

8.5. 802.11n HT40 ANTENNA A MODE IN THE 5.2 GHz BAND

8.5.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.56
High	5230	40.72

26 dB BANDWIDTH

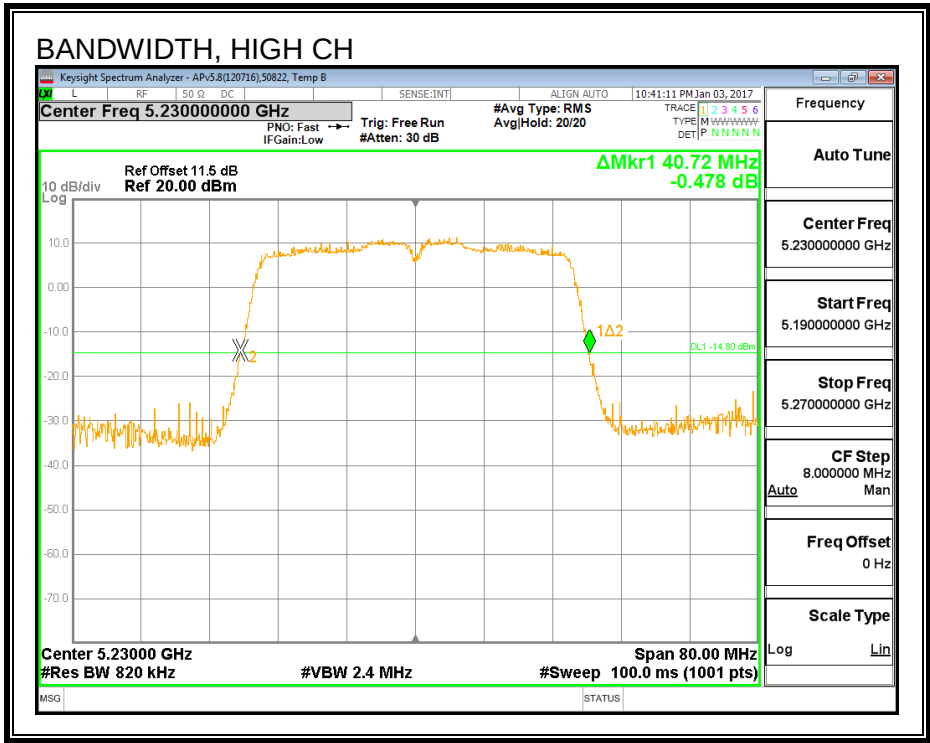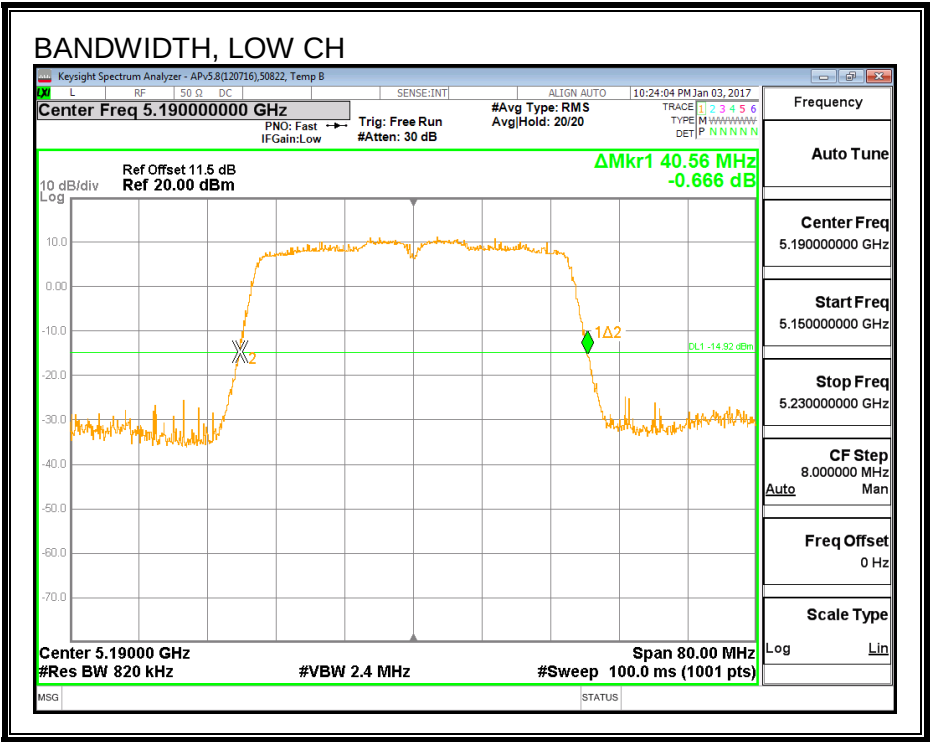

8.5.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.209
High	5230	36.178

99% BANDWIDTH

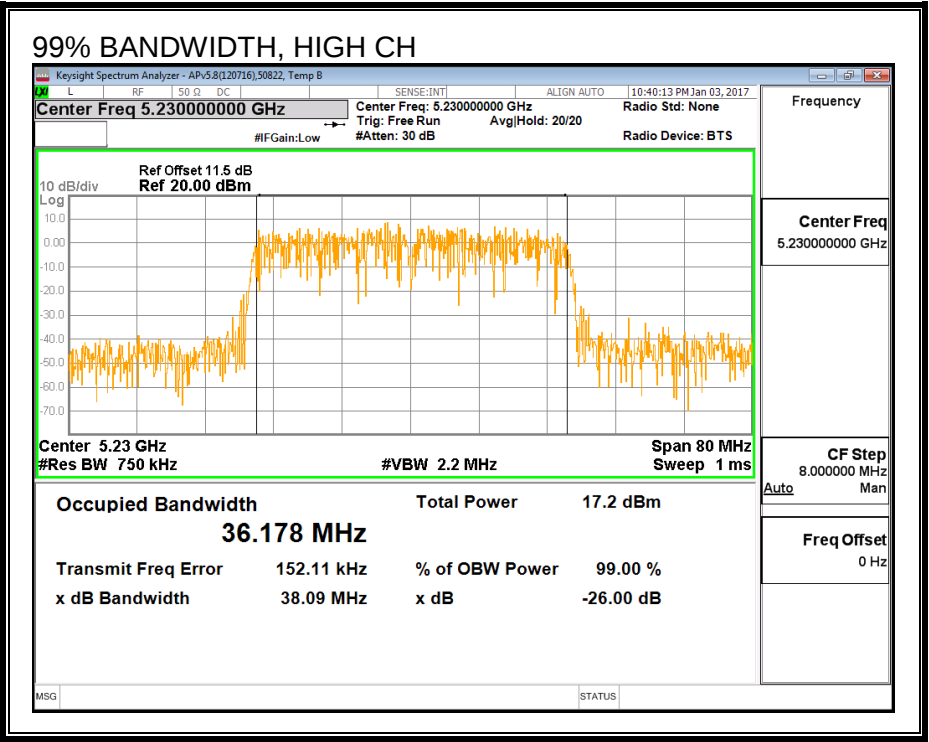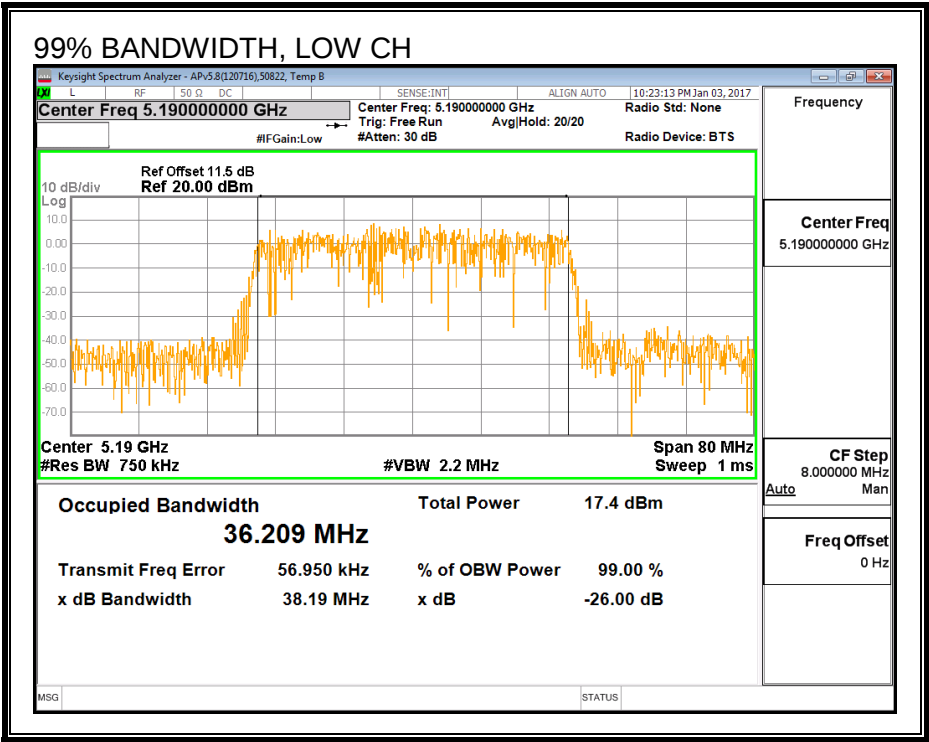

8.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	40802	Date:	1/21/17
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	14.26
High	5230	16.50

8.5.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39472	Date:	1/30/17
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	1.66	1.66	24.00	11.00
High	5230	1.66	1.66	24.00	11.00

Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Ant A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.26	14.26	24.00	-9.74
High	5230	16.50	16.50	24.00	-7.50

PSD Results

Channel	Frequency (MHz)	Ant A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	3.45	3.56	11.00	-7.44
High	5230	3.55	3.66	11.00	-7.34

PSD

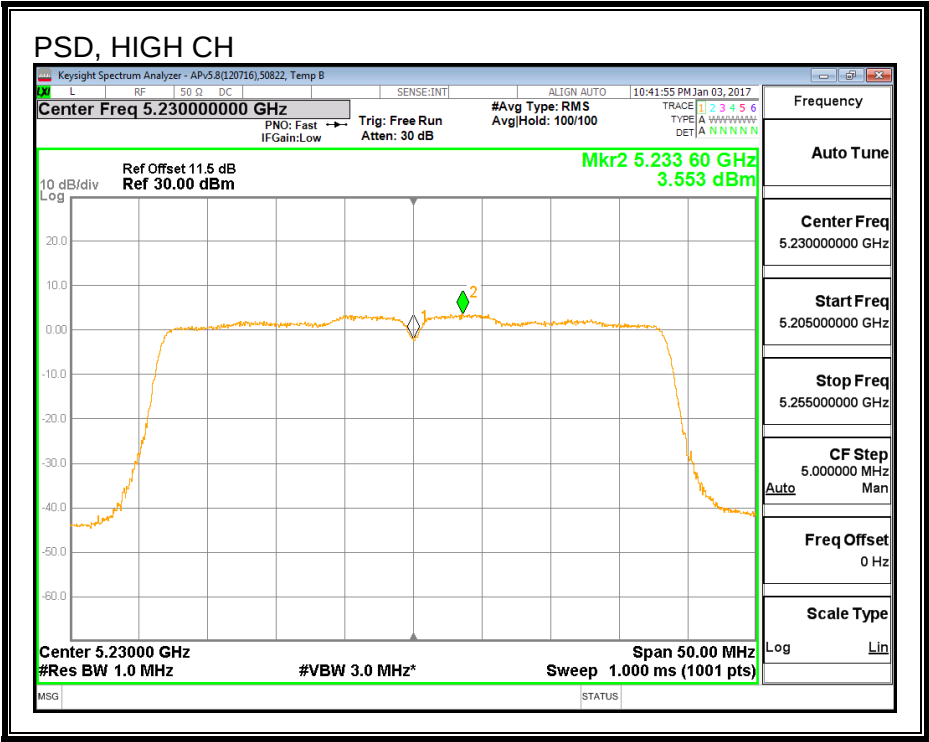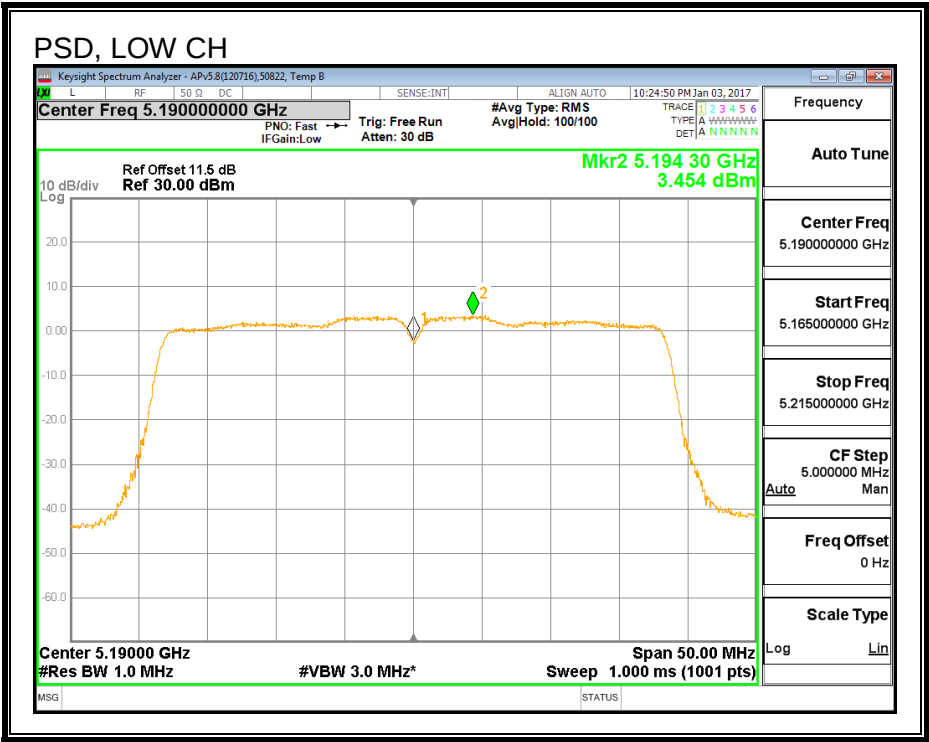

8.6. 802.11n HT40 ANTENNA B MODE IN THE 5.2 GHz BAND



8.6.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.64
High	5230	40.56

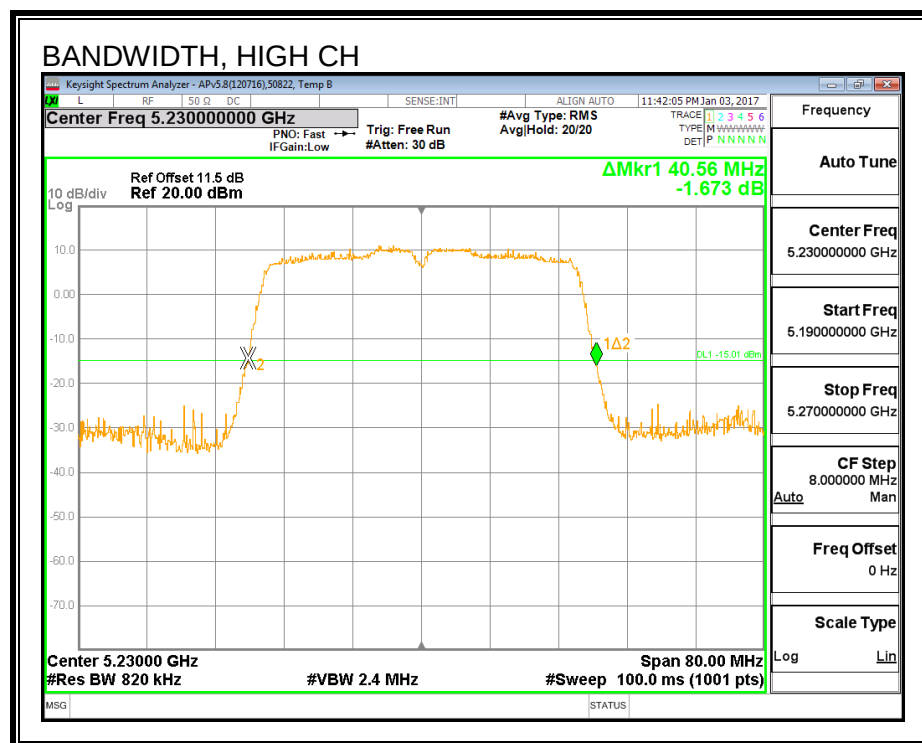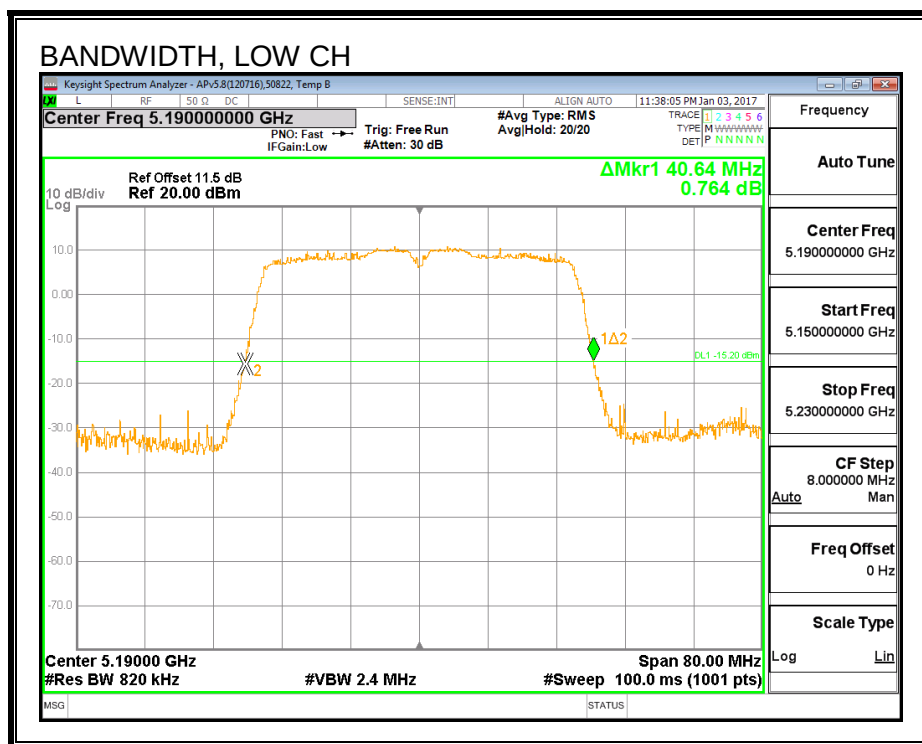

8.6.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.225
High	5230	36.372

99% BANDWIDTH

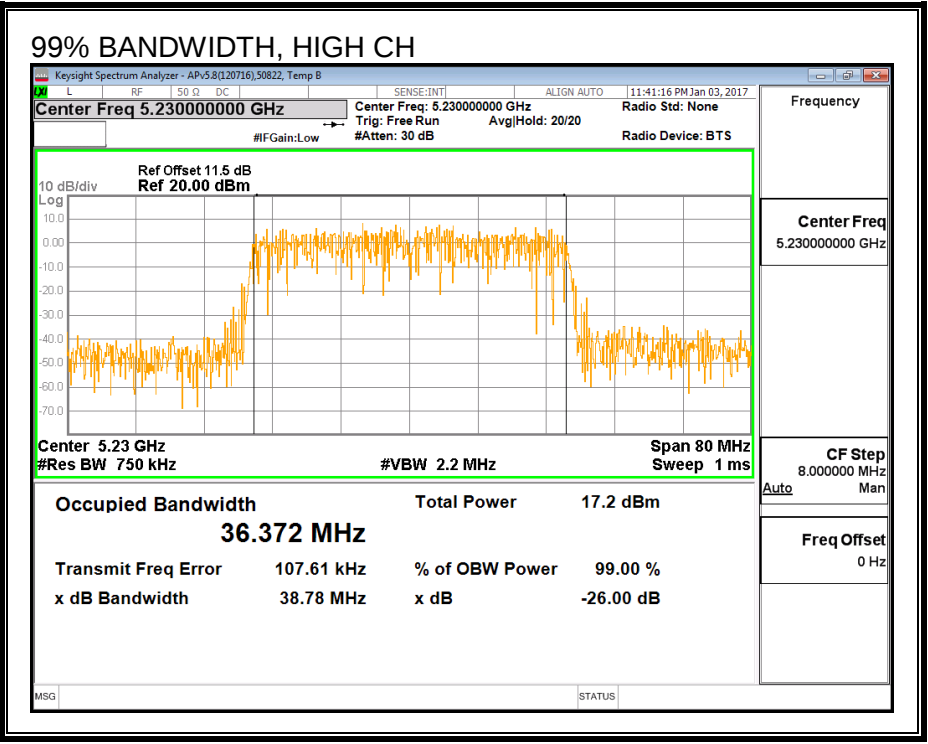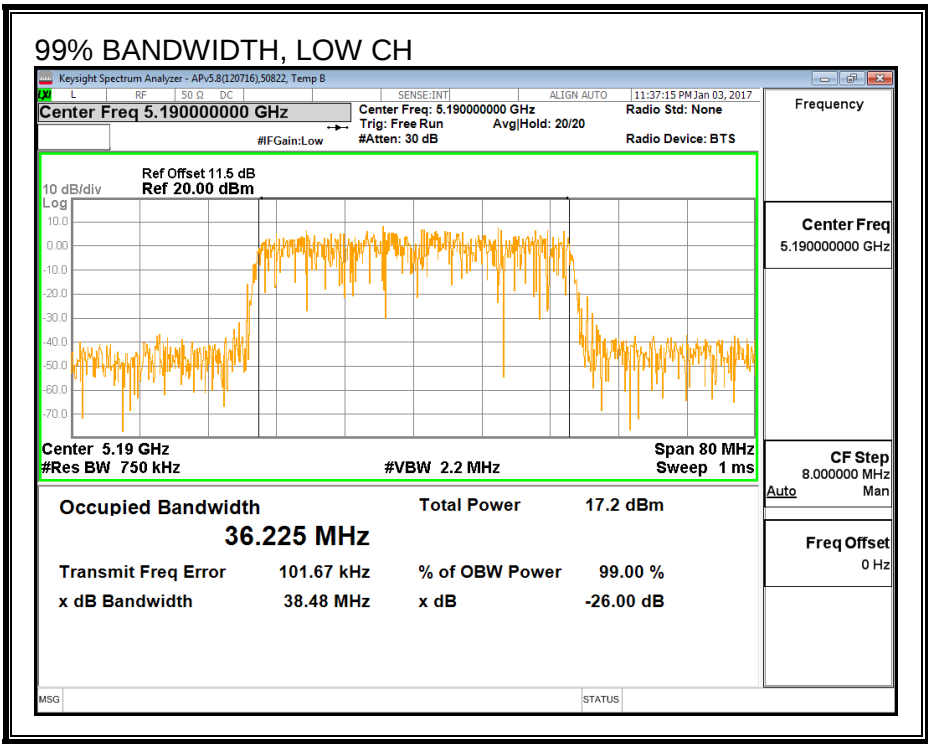

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	1/30/17
------------	-------	--------------	---------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	14.46
High	5230	16.80

8.6.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39472	Date:	1/30/17
------------	-------	--------------	---------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	2.65	2.65	24.00	11.00
High	5230	2.65	2.65	24.00	11.00

Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Ant B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.46	14.46	24.00	-9.54
High	5230	16.80	16.80	24.00	-7.20

PSD Results

Channel	Frequency (MHz)	Ant B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	3.54	3.65	11.00	-7.35
High	5230	3.52	3.63	11.00	-7.37

PSD

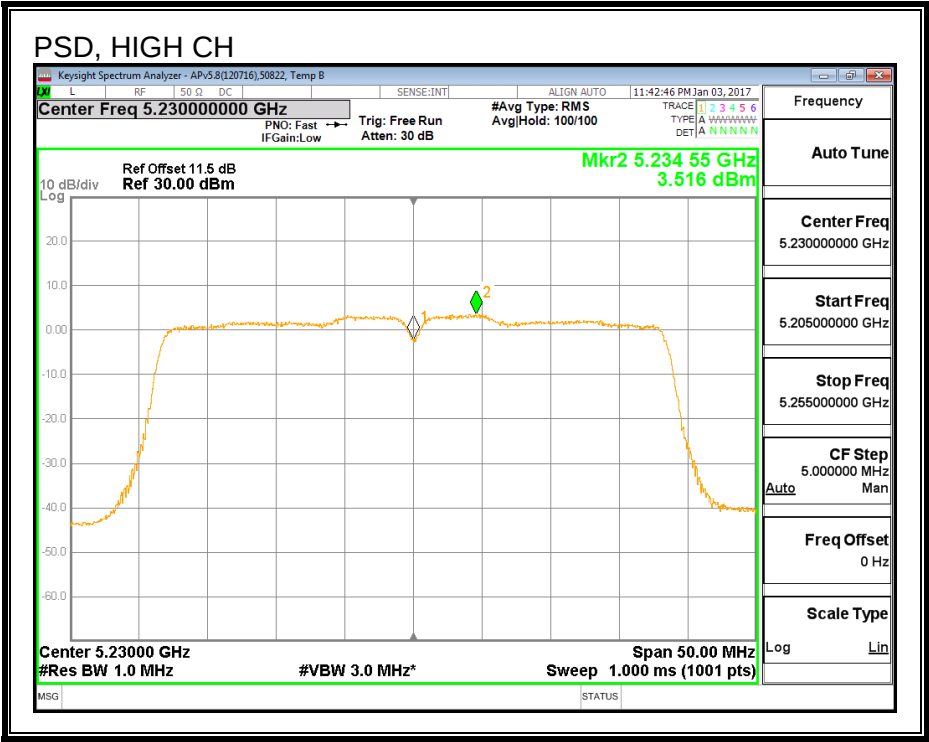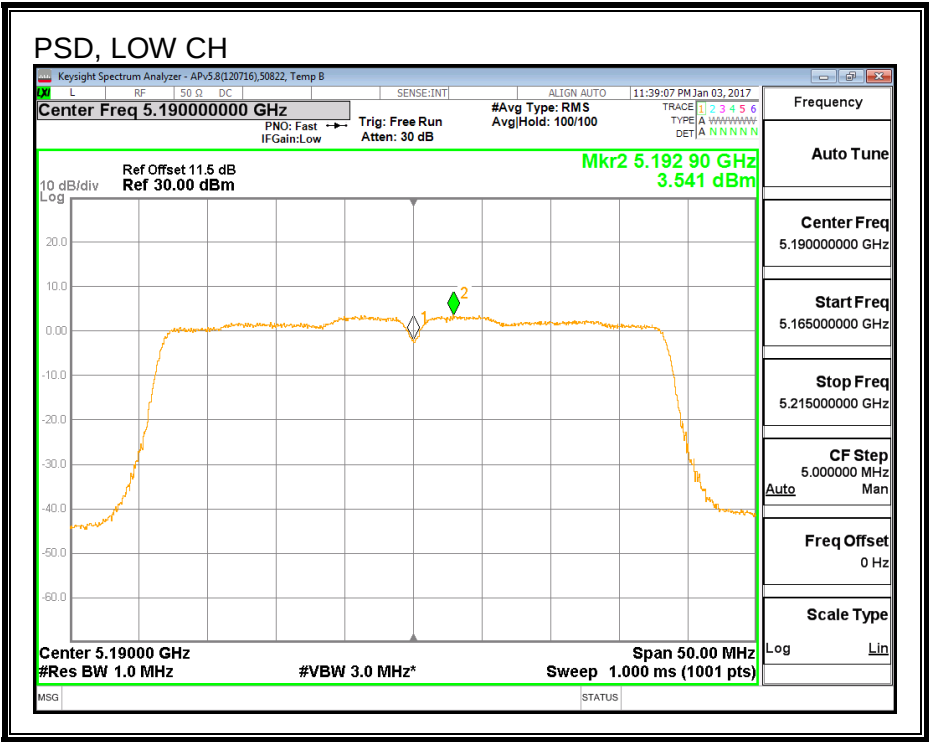

8.7. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

8.7.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Ant A (MHz)	26 dB BW Ant B (MHz)
Low	5190	40.16	40.56
High	5230	40.32	40.64

26 DB BANDWIDTH, ANTENNA A

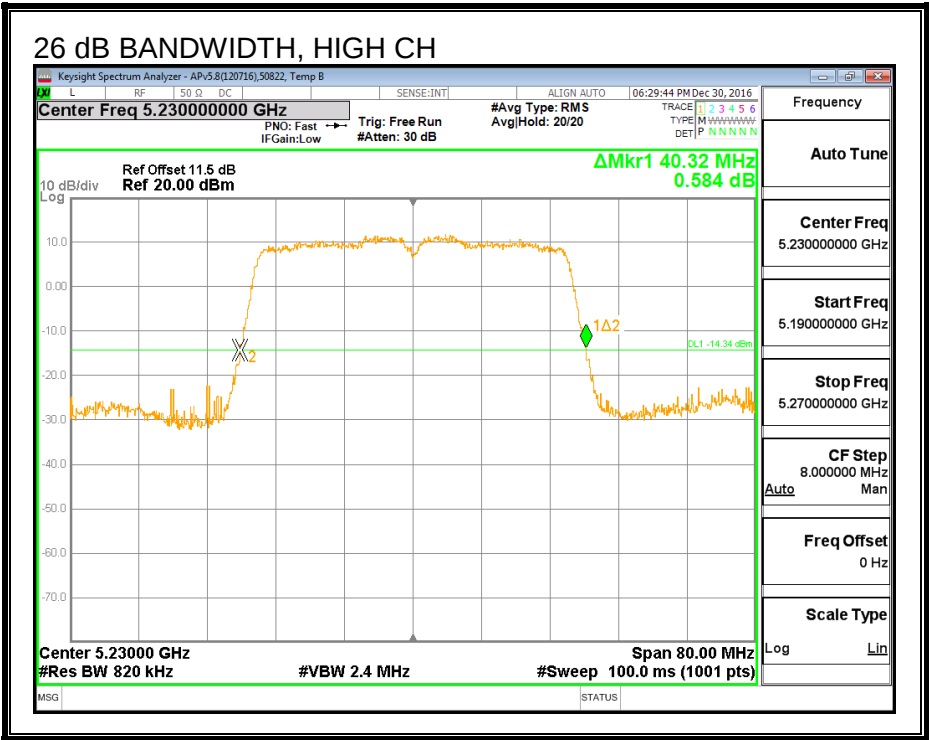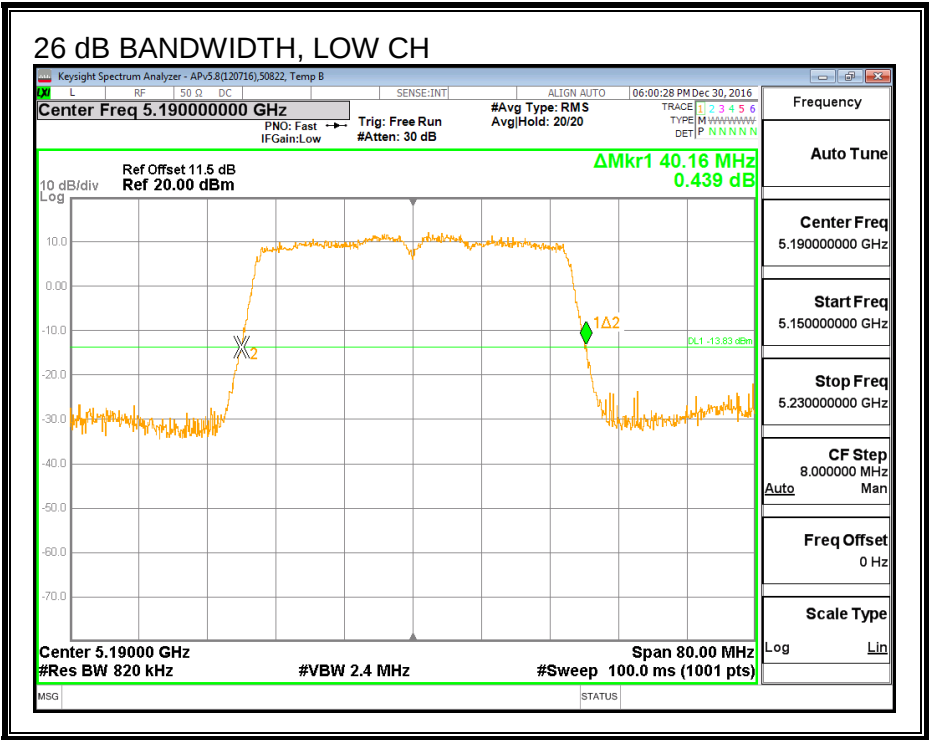

26 DB BANDWIDTH, ANTENNA B

