

9. ANTENNA PORT TEST RESULTS

9.1. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (7) (8)
RSS-248 4.5.3 and 4.5.5

Band 5.925-7.125 GHz

(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

4.5.3 Power limits for low-power client devices

The following limits shall apply to low-power client devices:

- the maximum e.i.r.p. spectral density shall not exceed -1 dBm/MHz and
- the maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 24 dBm

4.5.5 Power limits for standard client devices

The following limits shall apply to standard client devices:

- the maximum e.i.r.p. spectral density shall not exceed 17 dBm/MHz
- the maximum e.i.r.p. over the 5925-6875 MHz frequency band shall not exceed 30 dBm and
- the maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point

TEST PROCEDURE

The measurement method used for output power is KDB 789033 D02 v02r01, Section E.3.b (Method PM-G).

The measurement method used for power spectral density is KDB 789033 D02 v02r01, Section F

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter. For PSD, EUT was connected to a spectrum analyzer for measurement.

DIRECTIONAL ANTENNA GAIN

Since NSS=1 and $N_{ant} < 4$, Tx chains are uncorrelated for power and correlated for PSD.

The directional gains are as follows:

Frequency Range (MHz)	Maximum Gain Chain 0 (dBi)	Maximum Gain Chain 1 (dBi)	MIMO Uncorrelated Gain (dBi)	MIMO Correlated Gain (dBi)
5925-7125 (low gain)	5.2	5.2	5.2	8.21
5925-7125 (mid gain)	7.3	7.3	7.3	10.31
5925-6525 UNII 5/6 (high gain)	8.6	8.6	8.6	11.61
6525-7125 UNII 7/8 (high gain)	8.2	8.2	8.2	11.21

Antenna gains for MIMO operations are calculated using the formulae from KDB 662911 D01 Multiple Transmitter Output v02r01 section F. As the two antennas have the same gain equations 2)a)(i) and 2)a)(ii) for correlated and uncorrelated transmissions respectively are used.

Correlated directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi, where $N_{ANT} = 2$ for a 2x2 MIMO device

Uncorrelated directional gain = G_{ANT}

Test Information

Test Engineer:	85502, 104463/85502, 105900/84740, 84740, 33499/84740
Test Date:	2025-01-10 to 2025-02-11

9.1.1. 802.11a MODE 2TX IN THE UNII-5 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	30.00	17.00
Mid	6175	5.20	8.21	30.00	17.00
High	6415	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	16.69	17.24	25.18	30.00	-4.82
Mid	6175	16.87	16.96	25.13	30.00	-4.87
High	6415	17.34	17.77	25.77	30.00	-4.23

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	24.00	-1.00
Mid	6175	5.20	8.21	24.00	-1.00
High	6415	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-2.39	-2.03	6.00	24.00	-18.00
Mid	6175	-2.16	-1.21	6.55	24.00	-17.45
High	6415	-1.52	-0.69	7.13	24.00	-16.87

9.1.2. 802.11be EHT20 MODE 2TX IN THE UNII-5 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	30.00	17.00
Mid	6175	5.20	8.21	30.00	17.00
High	6415	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	8.23	8.81	16.74	30.00	-13.26
Mid	6175	8.66	9.15	17.12	30.00	-12.88
High	6415	8.75	9.24	17.21	30.00	-12.79

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	24.00	-1.00
Mid	6175	5.20	8.21	24.00	-1.00
High	6415	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-10.29	-9.99	-1.93	24.00	-25.93
Mid	6175	-10.27	-9.58	-1.70	24.00	-25.70
High	6415	-9.62	-9.17	-1.18	24.00	-25.18

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	30.00	17.00
Mid	6175	5.20	8.21	30.00	17.00
High	6415	5.20	8.21	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	11.51	11.98	19.96	30.00	-10.04
Mid	6175	11.97	12.16	20.28	30.00	-9.72
High	6415	11.89	12.26	20.29	30.00	-9.71

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5955	4.67	4.94	16.03	17.00	-0.97
Mid	6175	4.88	5.17	16.25	17.00	-0.75
High	6415	4.84	5.28	16.29	17.00	-0.71

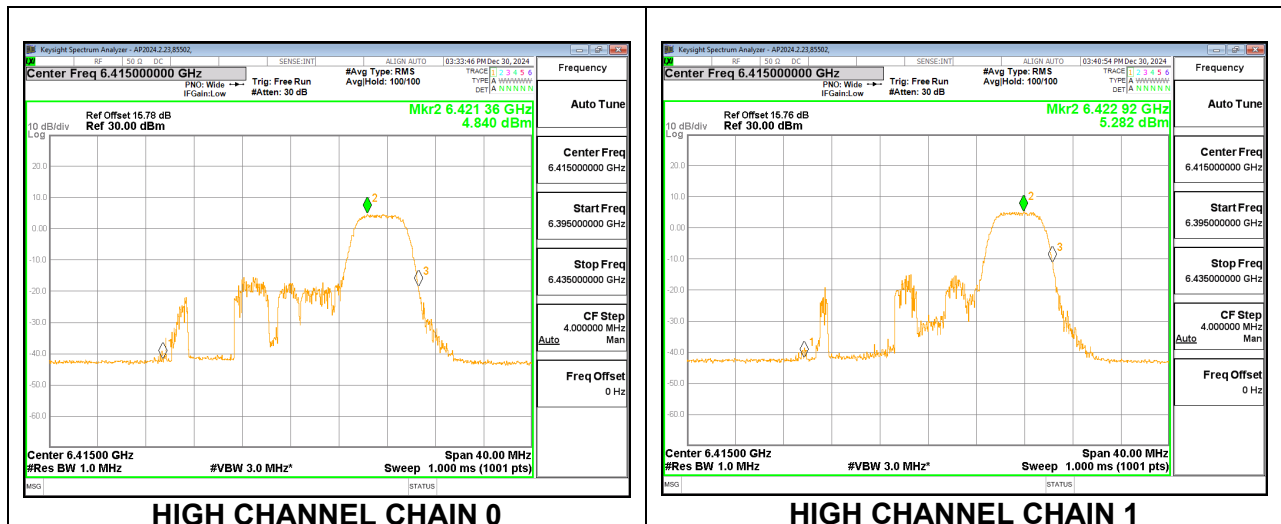

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	24.00	-1.00
Mid	6175	5.20	8.21	24.00	-1.00
High	6415	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-7.42	-6.99	1.01	24.00	-22.99
Mid	6175	-7.70	-6.82	0.97	24.00	-23.03
High	6415	-6.73	-6.24	1.73	24.00	-22.27

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	30.00	17.00
Mid	6175	5.20	8.21	30.00	17.00
High	6415	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	11.73	12.36	20.27	30.00	-9.73
Mid	6175	12.02	12.28	20.36	30.00	-9.64
High	6415	12.21	12.61	20.62	30.00	-9.38

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	24.00	-1.00
Mid	6175	5.20	8.21	24.00	-1.00
High	6415	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-7.61	-7.04	0.89	24.00	-23.11
Mid	6175	-7.54	-6.72	1.10	24.00	-22.90
High	6415	-6.89	-6.24	1.66	24.00	-22.34

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	30.00	17.00
Mid	6175	5.20	8.21	30.00	17.00
High	6415	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	14.58	15.43	23.24	30.00	-6.76
Mid	6175	14.81	15.12	23.18	30.00	-6.82
High	6415	14.52	15.70	23.36	30.00	-6.64

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	24.00	-1.00
Mid	6175	5.20	8.21	24.00	-1.00
High	6415	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-4.98	-4.60	3.42	24.00	-20.58
Mid	6175	-5.00	-4.27	3.59	24.00	-20.41
High	6415	-4.34	-3.79	4.15	24.00	-19.85

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	30.00	17.00
Mid	6175	5.20	8.21	30.00	17.00
High	6415	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	14.52	15.42	23.20	30.00	-6.80
Mid	6175	14.80	15.17	23.20	30.00	-6.80
High	6415	15.12	15.73	23.65	30.00	-6.35

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	24.00	-1.00
Mid	6175	5.20	8.21	24.00	-1.00
High	6415	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-5.05	-4.65	3.36	24.00	-20.64
Mid	6175	-5.04	-4.23	3.59	24.00	-20.41
High	6415	-4.23	-3.73	4.24	24.00	-19.76

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	30.00	17.00
Mid	6175	5.20	8.21	30.00	17.00
High	6415	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	16.79	17.26	25.24	30.00	-4.76
Mid	6175	16.79	16.92	25.07	30.00	-4.93
High	6415	17.28	17.75	25.73	30.00	-4.27

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	5.20	8.21	24.00	-1.00
Mid	6175	5.20	8.21	24.00	-1.00
High	6415	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-1.68	-1.04	6.86	24.00	-17.14
Mid	6175	-1.59	-0.58	7.15	24.00	-16.85
High	6415	-0.63	0.21	8.02	24.00	-15.98

9.1.3. 802.11be EHT40 MODE 2TX IN THE UNII-5 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5965	5.20	8.21	30.00	17.00
Mid	6165	5.20	8.21	30.00	17.00
High	6405	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5965	17.18	18.11	25.88	30.00	-4.12
Mid	6165	17.38	17.77	25.79	30.00	-4.21
High	6405	17.76	18.25	26.22	30.00	-3.78

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5965	5.20	8.21	24.00	-1.00
Mid	6165	5.20	8.21	24.00	-1.00
High	6405	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5965	1.07	1.62	9.56	24.00	-14.44
Mid	6165	1.25	2.09	9.90	24.00	-14.10
High	6405	2.07	2.59	10.55	24.00	-13.45

9.1.4. 802.11be EHT80 MODE 2TX IN THE UNII-5 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS) MRU LOW – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	5.20	8.21	30.00	17.00
Mid	6145	5.20	8.21	30.00	17.00
High	6385	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	17.27	18.05	25.89	30.00	-4.11
Mid	6145	17.27	17.69	25.70	30.00	-4.30
High	6385	17.74	18.34	26.26	30.00	-3.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS) MRU LOW – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	5.20	8.21	24.00	-1.00
Mid	6145	5.20	8.21	24.00	-1.00
High	6385	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	1.14	1.58	9.58	24.00	-14.42
Mid	6145	1.35	1.98	9.89	24.00	-14.11
High	6385	2.15	2.79	10.69	24.00	-13.31

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) MRU3 – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	5.20	8.21	30.00	17.00
Mid	6145	5.20	8.21	30.00	17.00
High	6385	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	17.41	18.11	25.98	30.00	-4.02
Mid	6145	17.27	17.65	25.67	30.00	-4.33
High	6385	17.76	18.46	26.33	30.00	-3.67

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) MRU3 – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	5.20	8.21	24.00	-1.00
Mid	6145	5.20	8.21	24.00	-1.00
High	6385	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	0.92	1.62	9.49	24.00	-14.51
Mid	6145	1.19	2.31	10.00	24.00	-14.00
High	6385	2.22	2.81	10.74	24.00	-13.26

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) MRU2 – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	5.20	8.21	30.00	17.00
Mid	6145	5.20	8.21	30.00	17.00
High	6385	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	17.43	18.03	25.95	30.00	-4.05
Mid	6145	17.35	17.78	25.78	30.00	-4.22
High	6385	17.88	18.44	26.38	30.00	-3.62

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) MRU2 – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	5.20	8.21	24.00	-1.00
Mid	6145	5.20	8.21	24.00	-1.00
High	6385	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	1.66	2.49	10.31	24.00	-13.69
Mid	6145	2.44	2.43	10.65	24.00	-13.35
High	6385	2.36	2.09	10.44	24.00	-13.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	5.20	8.21	30.00	17.00
Mid	6145	5.20	8.21	30.00	17.00
High	6385	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	16.13	16.78	24.68	30.00	-5.32
Mid	6145	17.18	17.52	25.56	30.00	-4.44
High	6385	17.19	17.78	25.71	30.00	-4.29

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	5.20	8.21	24.00	-1.00
Mid	6145	5.20	8.21	24.00	-1.00
High	6385	5.20	8.21	24.00	-1.00


Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	4.91	5.91	13.65	24.00	-10.35
Mid	6145	4.92	5.58	13.47	24.00	-10.53
High	6385	5.42	6.54	14.23	24.00	-9.77

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5985	-13.20	-12.60	-1.58	-1.00	-0.58
Mid	6145	-13.74	-12.82	-1.94	-1.00	-0.94
High	6385	-13.36	-12.51	-1.61	-1.00	-0.61

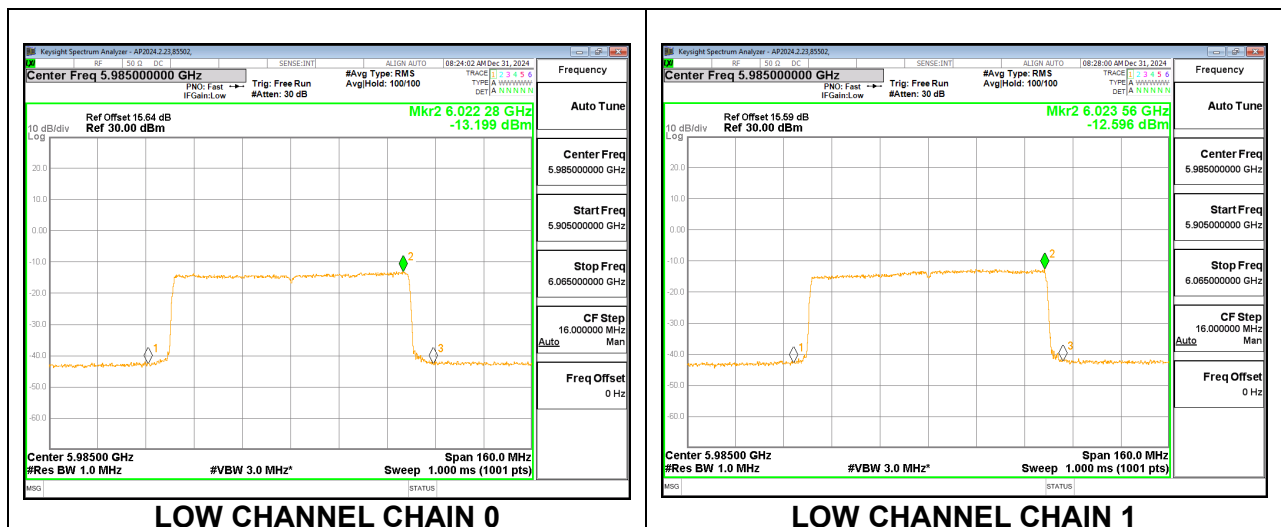

9.1.5. 802.11be EHT160 MODE 2TX IN THE UNII-5 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	16.31	17.10	24.93	30.00	-5.07
Mid	6185	17.35	17.84	25.81	30.00	-4.19
High	6345	17.76	18.31	26.25	30.00	-3.75

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	5.33	5.86	13.81	24.00	-10.19
Mid	6185	5.31	5.51	13.62	24.00	-10.38
High	6345	5.77	6.47	14.34	24.00	-9.66

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	16.24	17.10	24.90	30.00	-5.10
Mid	6185	17.30	17.76	25.75	30.00	-4.25
High	6345	17.77	18.31	26.26	30.00	-3.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	5.42	5.86	13.86	24.00	-10.14
Mid	6185	5.41	5.58	13.71	24.00	-10.29
High	6345	5.75	6.43	14.31	24.00	-9.69

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	16.30	16.96	24.85	30.00	-5.15
Mid	6185	17.27	17.76	25.73	30.00	-4.27
High	6345	17.66	18.23	26.16	30.00	-3.84

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	5.30	5.79	13.76	24.00	-10.24
Mid	6185	5.18	5.52	13.56	24.00	-10.44
High	6345	5.82	6.48	14.37	24.00	-9.63

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.80	16.51	24.38	30.00	-5.62
Mid	6185	16.70	17.23	25.18	30.00	-4.82
High	6345	17.17	17.82	25.72	30.00	-4.28

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.87	5.25	13.27	24.00	-10.73
Mid	6185	4.90	4.98	13.15	24.00	-10.85
High	6345	6.36	6.04	14.41	24.00	-9.59

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.78	16.59	24.41	30.00	-5.59
Mid	6185	16.80	17.17	25.20	30.00	-4.80
High	6345	17.18	17.85	25.74	30.00	-4.26

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.85	5.30	13.29	24.00	-10.71
Mid	6185	4.84	4.98	13.12	24.00	-10.88
High	6345	5.29	5.96	13.85	24.00	-10.15

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.89	16.73	24.54	30.00	-5.46
Mid	6185	16.61	17.35	25.21	30.00	-4.79
High	6345	17.24	17.98	25.84	30.00	-4.16

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.82	5.30	13.28	24.00	-10.72
Mid	6185	4.90	5.00	13.16	24.00	-10.84
High	6345	5.35	5.96	13.88	24.00	-10.12

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.89	16.58	24.46	30.00	-5.54
Mid	6185	16.82	17.26	25.26	30.00	-4.74
High	6345	17.14	17.86	25.73	30.00	-4.27

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.80	5.28	13.26	24.00	-10.74
Mid	6185	4.82	4.99	13.12	24.00	-10.88
High	6345	5.37	5.98	13.90	24.00	-10.10

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.90	16.51	24.43	30.00	-5.57
Mid	6185	15.77	16.31	24.26	30.00	-5.74
High	6345	16.10	16.76	24.65	30.00	-5.35

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.91	5.29	13.31	24.00	-10.69
Mid	6185	4.82	5.03	13.14	24.00	-10.86
High	6345	5.22	5.98	13.83	24.00	-10.17

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.29	16.58	24.19	30.00	-5.81
Mid	6185	16.77	17.20	25.20	30.00	-4.80
High	6345	17.16	17.81	25.71	30.00	-4.29

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.82	5.27	13.26	24.00	-10.74
Mid	6185	4.89	4.97	13.14	24.00	-10.86
High	6345	5.25	5.99	13.85	24.00	-10.15

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.78	16.51	24.37	30.00	-5.63
Mid	6185	16.76	17.23	25.21	30.00	-4.79
High	6345	17.21	17.91	25.78	30.00	-4.22

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.91	5.25	13.29	24.00	-10.71
Mid	6185	4.88	4.97	13.14	24.00	-10.86
High	6345	5.32	5.97	13.87	24.00	-10.13

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x 996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	30.00	17.00
Mid	6185	5.20	8.21	30.00	17.00
High	6345	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.72	16.44	24.31	30.00	-5.69
Mid	6185	15.68	16.18	24.15	30.00	-5.85
High	6345	18.21	19.01	26.84	30.00	-3.16

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	5.20	8.21	24.00	-1.00
Mid	6185	5.20	8.21	24.00	-1.00
High	6345	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	5.22	5.74	13.70	24.00	-10.30
Mid	6185	5.34	5.45	13.61	24.00	-10.39
High	6345	5.74	6.40	14.29	24.00	-9.71

9.1.6. 802.11be EHT320 MODE 2TX IN THE UNII-5 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) MRU6 – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.88	16.51	24.42	30.00	-5.58
High	6265	16.05	16.57	24.53	30.00	-5.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) MRU6 – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.35	8.72	16.75	24.00	-7.25
High	6265	8.53	8.87	16.91	24.00	-7.09

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.87	16.52	24.42	30.00	-5.58
High	6265	16.04	16.57	24.52	30.00	-5.48

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.24	8.68	16.68	24.00	-7.32
High	6265	8.46	8.89	16.89	24.00	-7.11

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	13.91	14.47	22.41	30.00	-7.59
High	6265	14.10	14.66	22.60	30.00	-7.40

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	6.55	6.91	14.94	24.00	-9.06
High	6265	6.65	6.96	15.02	24.00	-8.98

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.87	16.43	24.37	30.00	-5.63
High	6265	16.08	16.56	24.54	30.00	-5.46

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.20	8.59	16.61	24.00	-7.39
High	6265	8.54	8.97	16.97	24.00	-7.03

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.83	16.47	24.37	30.00	-5.63
High	6265	16.04	16.65	24.57	30.00	-5.43

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.25	8.70	16.69	24.00	-7.31
High	6265	8.51	8.94	16.94	24.00	-7.06

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.73	16.30	24.23	30.00	-5.77
High	6265	15.92	16.47	24.41	30.00	-5.59

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.10	8.54	16.54	24.00	-7.46
High	6265	8.33	8.82	16.79	24.00	-7.21

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.65	16.32	24.21	30.00	-5.79
High	6265	16.23	16.73	24.70	30.00	-5.30

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.00	8.47	16.45	24.00	-7.55
High	6265	8.32	8.76	16.76	24.00	-7.24

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.75	16.40	24.30	30.00	-5.70
High	6265	16.00	16.57	24.50	30.00	-5.50

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.03	8.49	16.48	24.00	-7.52
High	6265	8.33	8.74	16.75	24.00	-7.25

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.45	16.05	23.97	30.00	-6.03
High	6265	15.97	16.47	24.44	30.00	-5.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.03	8.66	16.57	24.00	-7.43
High	6265	8.34	8.84	16.81	24.00	-7.19

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.93	16.56	24.47	30.00	-5.53
High	6265	16.09	16.69	24.61	30.00	-5.39

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.51	8.56	16.75	24.00	-7.25
High	6265	8.35	8.78	16.78	24.00	-7.22

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.66	16.24	24.17	30.00	-5.83
High	6265	16.02	16.54	24.50	30.00	-5.50

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.97	8.46	16.43	24.00	-7.57
High	6265	8.39	8.85	16.84	24.00	-7.16

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.87	16.46	24.39	30.00	-5.61
High	6265	15.92	16.44	24.40	30.00	-5.60

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.06	8.44	16.46	24.00	-7.54
High	6265	8.36	8.84	16.82	24.00	-7.18

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.79	16.51	24.38	30.00	-5.62
High	6265	15.80	16.41	24.33	30.00	-5.67

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.07	8.57	16.54	24.00	-7.46
High	6265	4.40	8.86	15.39	24.00	-8.61

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.85	16.44	24.37	30.00	-5.63
High	6265	16.07	16.70	24.61	30.00	-5.39

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.12	8.57	16.56	24.00	-7.44
High	6265	8.51	8.84	16.89	24.00	-7.11

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.81	16.43	24.34	30.00	-5.66
High	6265	15.90	16.39	24.36	30.00	-5.64

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	8.04	8.54	16.51	24.00	-7.49
High	6265	8.48	8.78	16.84	24.00	-7.16

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	30.00	17.00
High	6265	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	18.71	18.86	27.00	30.00	-3.00
High	6265	17.40	17.80	25.81	30.00	-4.19

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	5.20	8.21	24.00	-1.00
High	6265	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	10.54	11.00	18.99	24.00	-5.01
High	6265	10.86	11.15	19.22	24.00	-4.78

9.1.7. 802.11a MODE 2TX IN THE UNII-5 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	30.00	17.00
Mid	6175	7.30	10.31	30.00	17.00
High	6415	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	14.11	14.84	24.80	30.00	-5.20
Mid	6175	14.85	15.02	25.25	30.00	-4.75
High	6415	14.68	15.06	25.18	30.00	-4.82

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	24.00	-1.00
Mid	6175	7.30	10.31	24.00	-1.00
High	6415	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-3.97	-4.01	6.32	24.00	-17.68
Mid	6175	-4.01	-3.51	6.56	24.00	-17.44
High	6415	-3.19	-2.19	7.65	24.00	-16.35

9.1.8. 802.11be EHT20 MODE 2TX IN THE UNII-5 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	30.00	17.00
Mid	6175	7.30	10.31	30.00	17.00
High	6415	7.30	10.31	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	5.52	5.14	15.64	30.00	-14.36
Mid	6175	6.93	7.38	17.47	30.00	-12.53
High	6415	6.15	6.43	16.60	30.00	-13.40

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5955	2.95	3.31	16.45	17.00	-0.55
Mid	6175	2.43	3.01	16.05	17.00	-0.95
High	6415	2.98	3.03	16.32	17.00	-0.68

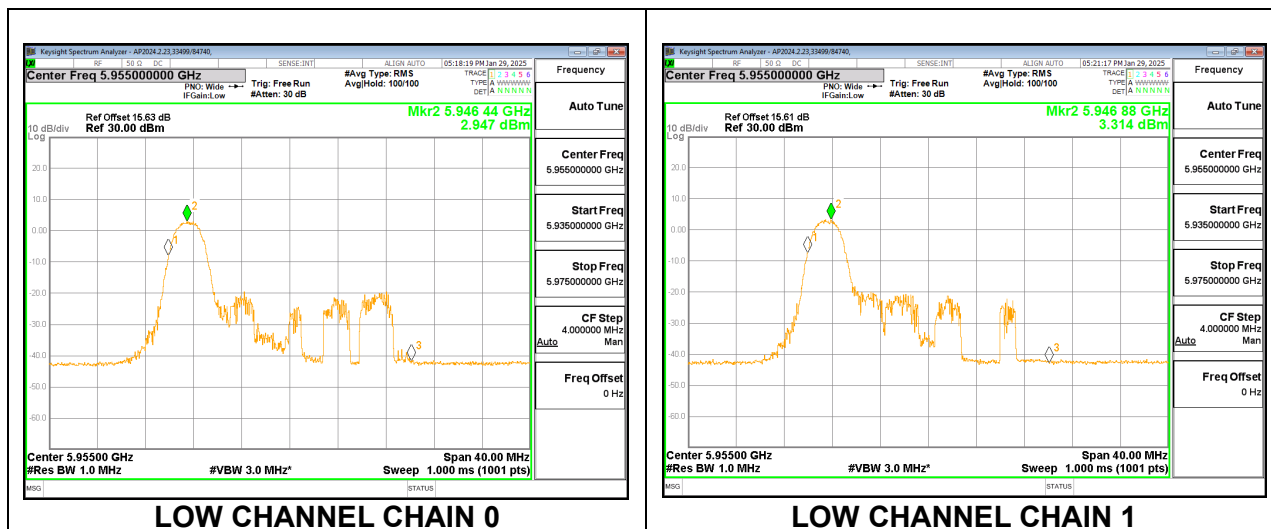

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits


Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	24.00	-1.00
Mid	6175	7.30	10.31	24.00	-1.00
High	6415	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-12.12	-12.00	-1.75	24.00	-25.75
Mid	6175	-12.60	-11.92	-1.94	24.00	-25.94
High	6415	-11.41	-11.37	-1.08	24.00	-25.08

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5955	-15.34	-15.19	-1.94	-1.00	-0.94
Mid	6175	-17.08	-16.39	-3.40	-1.00	-2.40
High	6415	-14.93	-14.79	-1.54	-1.00	-0.54

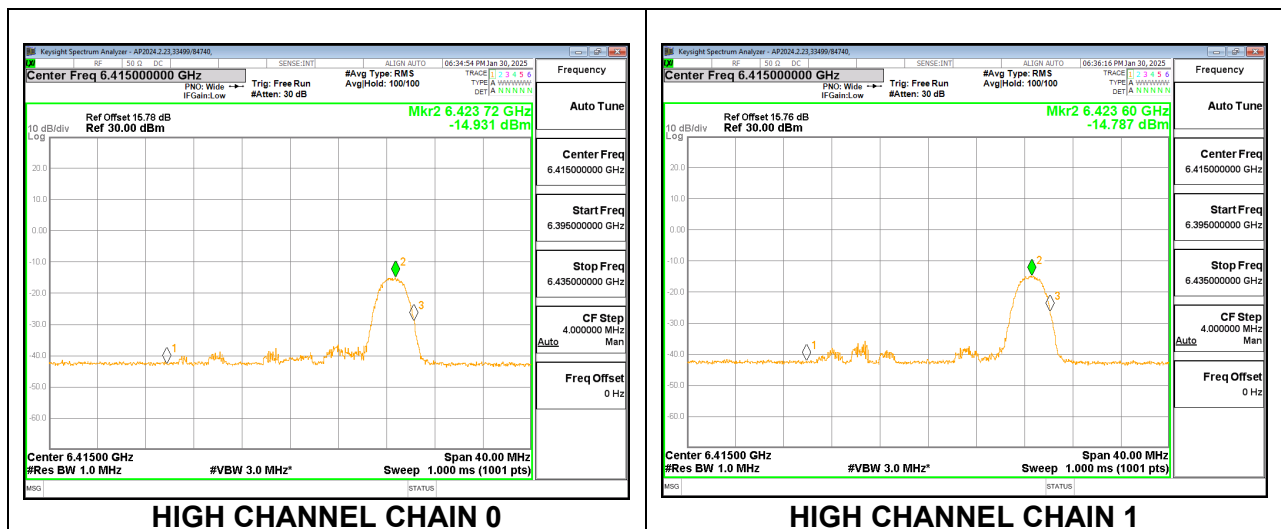

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	30.00	17.00
Mid	6175	7.30	10.31	30.00	17.00
High	6415	7.30	10.31	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	8.47	8.31	18.70	30.00	-11.30
Mid	6175	9.13	9.70	19.73	30.00	-10.27
High	6415	8.48	8.25	18.68	30.00	-11.32

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5955	2.56	3.20	16.44	17.00	-0.56
Mid	6175	2.92	3.31	16.44	17.00	-0.56
High	6415	3.02	3.19	16.43	17.00	-0.57

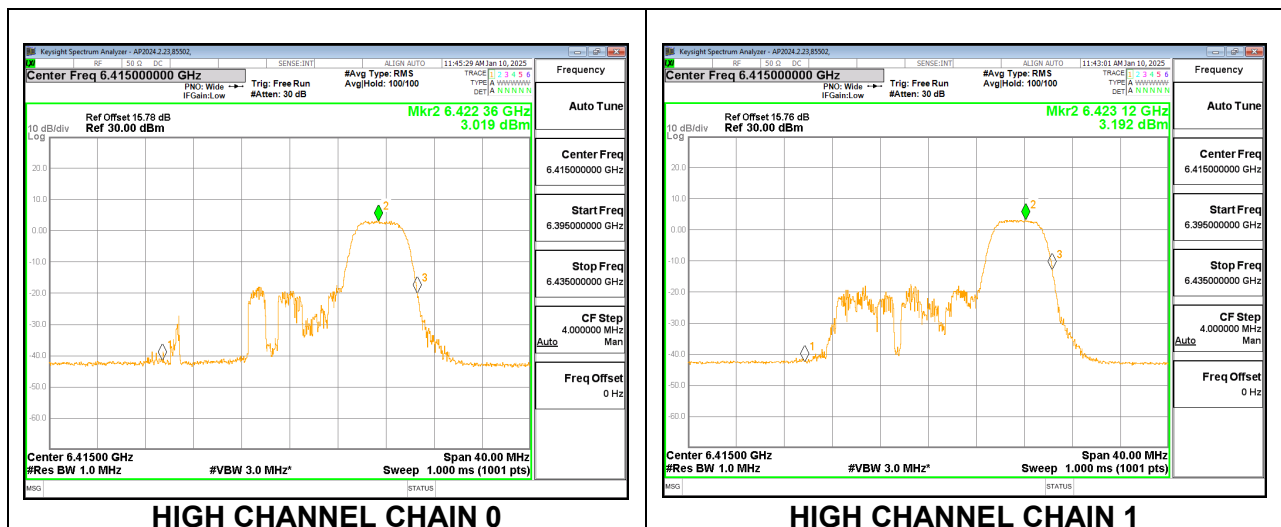

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	24.00	-1.00
Mid	6175	7.30	10.31	24.00	-1.00
High	6415	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-9.64	-9.62	0.68	24.00	-23.32
Mid	6175	-9.47	-8.80	1.19	24.00	-22.81
High	6415	-8.50	-8.35	1.89	24.00	-22.11

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5955	-16.00	-14.30	-1.75	-1.00	-0.75
Mid	6175	-16.05	-14.26	-1.74	-1.00	-0.74
High	6415	-16.00	-14.43	-1.82	-1.00	-0.82

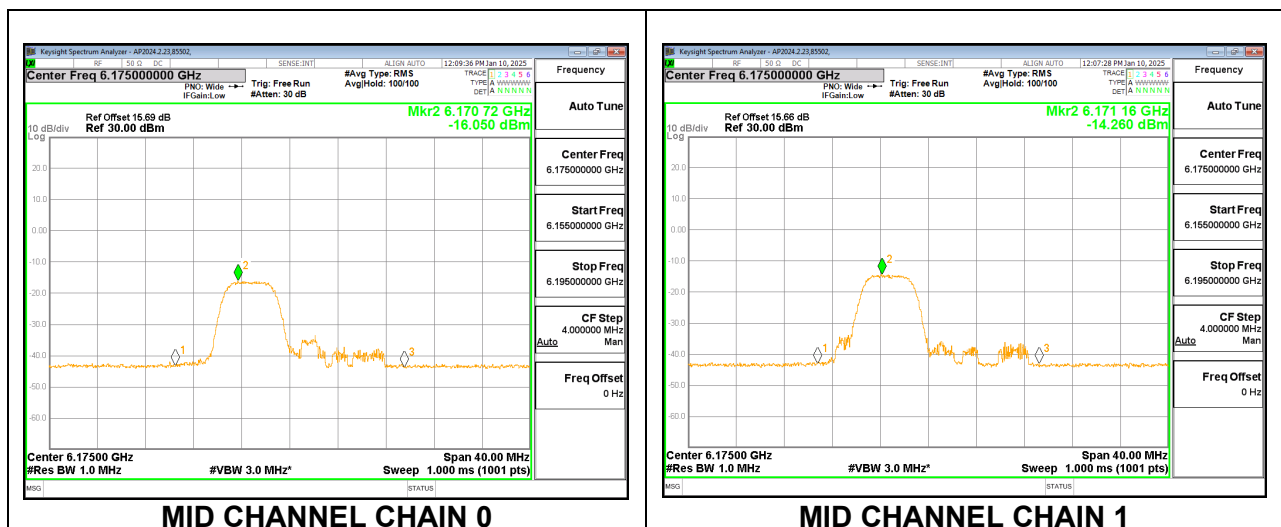

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	30.00	17.00
Mid	6175	7.30	10.31	30.00	17.00
High	6415	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	8.54	9.37	19.29	30.00	-10.71
Mid	6175	9.79	9.70	20.06	30.00	-9.94
High	6415	9.57	9.37	19.78	30.00	-10.22

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	24.00	-1.00
Mid	6175	7.30	10.31	24.00	-1.00
High	6415	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-9.88	-9.72	0.51	24.00	-23.49
Mid	6175	-9.39	-8.66	1.30	24.00	-22.70
High	6415	-9.64	-9.55	0.72	24.00	-23.28

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	30.00	17.00
Mid	6175	7.30	10.31	30.00	17.00
High	6415	7.30	10.31	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	11.46	11.40	21.74	30.00	-8.26
Mid	6175	11.66	11.45	21.87	30.00	-8.13
High	6415	11.39	11.18	21.60	30.00	-8.40

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5955	2.47	3.48	16.33	17.00	-0.67
Mid	6175	2.74	3.37	16.39	17.00	-0.61
High	6415	3.11	3.25	16.50	17.00	-0.50

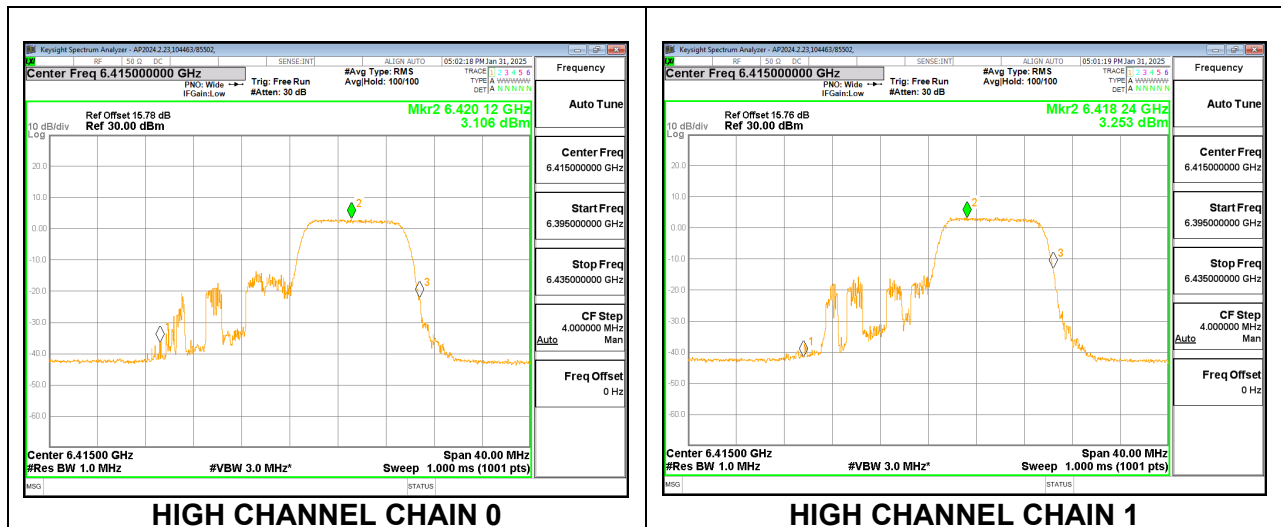

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	24.00	-1.00
Mid	6175	7.30	10.31	24.00	-1.00
High	6415	7.30	10.31	24.00	-1.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-6.18	-6.61	3.92	24.00	-20.08
Mid	6175	-6.82	-6.26	3.78	24.00	-20.22
High	6415	-6.08	-5.91	4.32	24.00	-19.68

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5955	-15.58	-14.87	-1.89	-1.00	-0.89
Mid	6175	-15.71	-14.97	-2.00	-1.00	-1.00
High	6415	-15.37	-14.99	-1.85	-1.00	-0.85

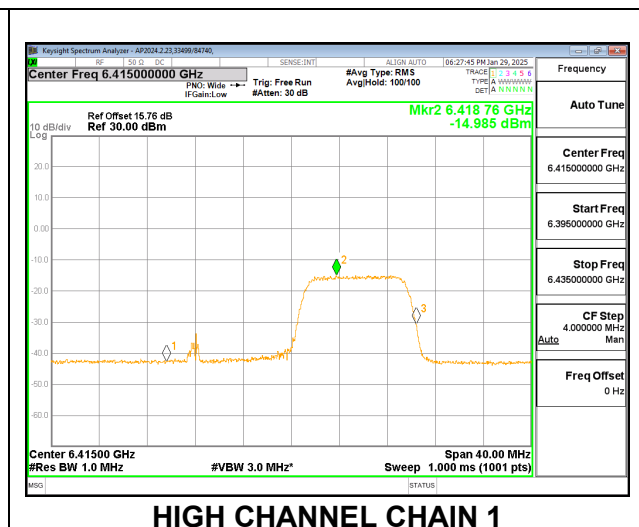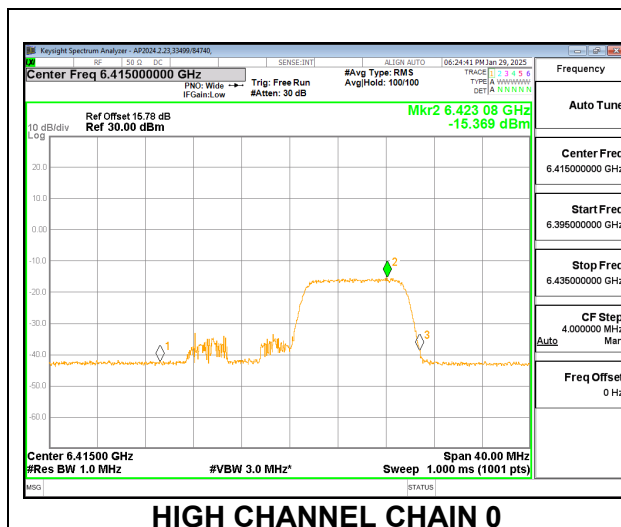

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	30.00	17.00
Mid	6175	7.30	10.31	30.00	17.00
High	6415	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	11.74	11.80	22.08	30.00	-7.92
Mid	6175	12.15	11.91	22.34	30.00	-7.66
High	6415	11.89	11.86	22.19	30.00	-7.81

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	24.00	-1.00
Mid	6175	7.30	10.31	24.00	-1.00
High	6415	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-6.84	-6.70	3.54	24.00	-20.46
Mid	6175	-6.84	-6.16	3.82	24.00	-20.18
High	6415	-6.09	-5.99	4.27	24.00	-19.73

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	30.00	17.00
Mid	6175	7.30	10.31	30.00	17.00
High	6415	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	14.54	14.57	24.87	30.00	-5.13
Mid	6175	14.95	14.68	25.13	30.00	-4.87
High	6415	14.19	14.26	24.54	30.00	-5.46

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	7.30	10.31	24.00	-1.00
Mid	6175	7.30	10.31	24.00	-1.00
High	6415	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-4.38	-4.30	5.97	24.00	-18.03
Mid	6175	-4.41	-3.77	6.23	24.00	-17.77
High	6415	-3.63	-3.33	6.83	24.00	-17.17

9.1.9. 802.11be EHT40 MODE 2TX IN THE UNII-5 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5965	7.30	10.31	30.00	17.00
Mid	6165	7.30	10.31	30.00	17.00
High	6405	7.30	10.31	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5965	17.42	17.33	27.69	30.00	-2.31
Mid	6165	17.83	17.55	28.00	30.00	-2.00
High	6405	17.43	17.50	27.78	30.00	-2.22

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5965	1.87	2.67	15.61	17.00	-1.39
Mid	6165	1.62	1.68	14.97	17.00	-2.03
High	6405	1.34	1.88	14.94	17.00	-2.06

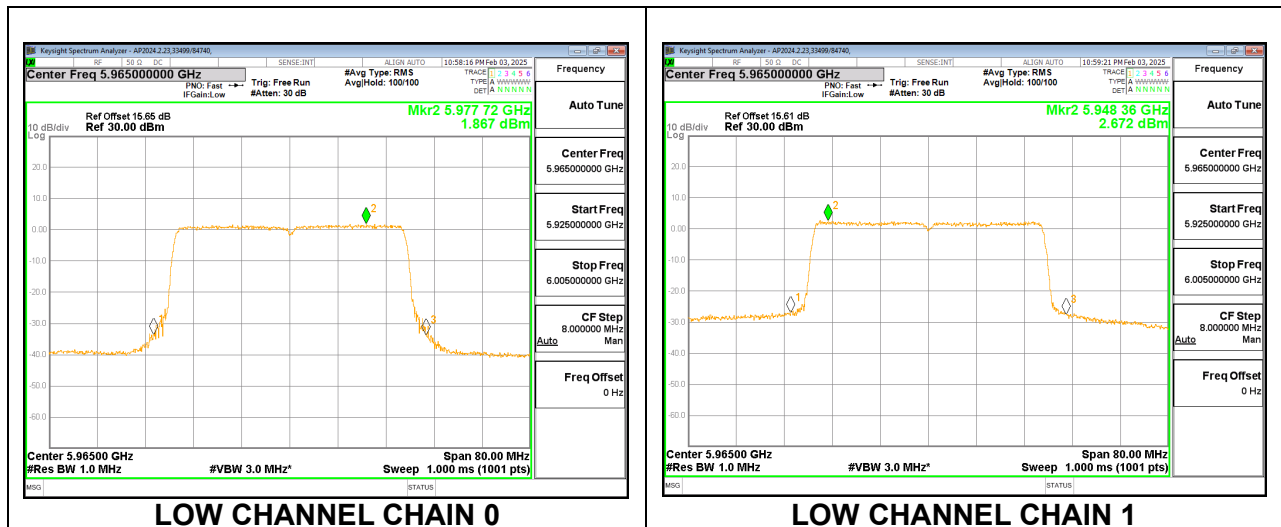

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5965	7.30	10.31	24.00	-1.00
Mid	6165	7.30	10.31	24.00	-1.00
High	6405	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5965	0.10	0.30	10.51	24.00	-13.49
Mid	6165	0.35	0.98	10.99	24.00	-13.01
High	6405	1.01	1.43	11.54	24.00	-12.46

9.1.10. 802.11be EHT80 MODE 2TX IN THE UNII-5 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	7.30	10.31	30.00	17.00
Mid	6145	7.30	10.31	30.00	17.00
High	6385	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	17.29	17.24	27.58	30.00	-2.42
Mid	6145	17.66	17.43	27.86	30.00	-2.14
High	6385	17.44	17.40	27.73	30.00	-2.27

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	7.30	10.31	24.00	-1.00
Mid	6145	7.30	10.31	24.00	-1.00
High	6385	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	0.22	0.48	10.66	24.00	-13.34
Mid	6145	0.31	1.09	11.03	24.00	-12.97
High	6385	1.24	1.67	11.77	24.00	-12.23

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	7.30	10.31	30.00	17.00
Mid	6145	7.30	10.31	30.00	17.00
High	6385	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	17.22	17.26	27.55	30.00	-2.45
Mid	6145	17.61	17.44	27.84	30.00	-2.16
High	6385	17.36	17.37	27.68	30.00	-2.32

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	7.30	10.31	24.00	-1.00
Mid	6145	7.30	10.31	24.00	-1.00
High	6385	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	0.64	0.94	11.10	24.00	-12.90
Mid	6145	-0.64	0.20	10.11	24.00	-13.89
High	6385	0.81	1.11	11.27	24.00	-12.73

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	7.30	10.31	30.00	17.00
Mid	6145	7.30	10.31	30.00	17.00
High	6385	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	17.25	17.25	27.56	30.00	-2.44
Mid	6145	17.58	17.38	27.79	30.00	-2.21
High	6385	17.37	17.30	27.65	30.00	-2.35

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	7.30	10.31	24.00	-1.00
Mid	6145	7.30	10.31	24.00	-1.00
High	6385	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	-0.02	0.43	10.52	24.00	-13.48
Mid	6145	-0.04	0.72	10.67	24.00	-13.33
High	6385	1.10	1.58	11.66	24.00	-12.34

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	7.30	10.31	30.00	17.00
Mid	6145	7.30	10.31	30.00	17.00
High	6385	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	15.92	15.78	26.16	30.00	-3.84
Mid	6145	16.24	15.90	26.38	30.00	-3.62
High	6385	17.35	17.40	27.69	30.00	-2.31

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	7.30	10.31	24.00	-1.00
Mid	6145	7.30	10.31	24.00	-1.00
High	6385	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	5.06	4.90	15.29	24.00	-8.71
Mid	6145	4.89	4.55	15.03	24.00	-8.97
High	6385	4.17	4.22	14.51	24.00	-9.49

9.1.11. 802.11be EHT160 MODE 2TX IN THE UNII-5 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.76	15.63	26.01	30.00	-3.99
Mid	6185	16.24	16.02	26.44	30.00	-3.56
High	6345	15.33	15.57	25.76	30.00	-4.24

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	5.04	4.91	15.29	24.00	-8.71
Mid	6185	4.99	4.75	15.18	24.00	-8.82
High	6345	4.71	4.84	15.09	24.00	-8.91

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.86	15.67	26.08	30.00	-3.92
Mid	6185	16.40	16.08	26.55	30.00	-3.45
High	6345	15.35	15.63	25.80	30.00	-4.20

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	5.02	4.91	15.28	24.00	-8.72
Mid	6185	4.98	4.69	15.15	24.00	-8.85
High	6345	4.64	4.85	15.06	24.00	-8.94

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.76	15.58	25.98	30.00	-4.02
Mid	6185	16.29	16.02	26.47	30.00	-3.53
High	6345	15.45	15.52	25.80	30.00	-4.20

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	5.08	4.88	15.29	24.00	-8.71
Mid	6185	5.04	4.73	15.20	24.00	-8.80
High	6345	4.65	4.80	15.04	24.00	-8.96

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.81	15.39	25.42	30.00	-4.58
Mid	6185	15.37	15.83	25.92	30.00	-4.08
High	6345	15.29	15.63	25.77	30.00	-4.23

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.27	4.80	14.85	24.00	-9.15
Mid	6185	4.30	4.51	14.72	24.00	-9.28
High	6345	4.63	4.96	15.11	24.00	-8.89

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.80	15.54	25.50	30.00	-4.50
Mid	6185	15.43	15.75	25.90	30.00	-4.10
High	6345	15.29	15.73	25.83	30.00	-4.17

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.19	4.71	14.77	24.00	-9.23
Mid	6185	4.36	4.42	14.70	24.00	-9.30
High	6345	4.64	4.87	15.07	24.00	-8.93

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.92	15.43	25.49	30.00	-4.51
Mid	6185	15.39	15.72	25.87	30.00	-4.13
High	6345	15.27	15.60	25.75	30.00	-4.25

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.29	4.68	14.80	24.00	-9.20
Mid	6185	4.26	4.36	14.62	24.00	-9.38
High	6345	4.72	4.81	15.08	24.00	-8.92

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.80	15.54	25.50	30.00	-4.50
Mid	6185	15.43	15.75	25.90	30.00	-4.10
High	6345	15.29	15.73	25.83	30.00	-4.17

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.19	4.71	14.77	24.00	-9.23
Mid	6185	4.36	4.42	14.70	24.00	-9.30
High	6345	4.64	4.87	15.07	24.00	-8.93

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.80	15.38	25.41	30.00	-4.59
Mid	6185	15.32	15.65	25.80	30.00	-4.20
High	6345	15.25	15.60	25.74	30.00	-4.26

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.25	4.77	14.83	24.00	-9.17
Mid	6185	4.38	4.48	14.74	24.00	-9.26
High	6345	4.67	4.75	15.02	24.00	-8.98

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.92	15.46	25.51	30.00	-4.49
Mid	6185	15.29	15.59	25.75	30.00	-4.25
High	6345	15.29	15.75	25.84	30.00	-4.16

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.30	4.82	14.88	24.00	-9.12
Mid	6185	4.25	4.43	14.65	24.00	-9.35
High	6345	4.66	4.97	15.13	24.00	-8.87

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.88	15.50	25.51	30.00	-4.49
Mid	6185	15.27	15.59	25.74	30.00	-4.26
High	6345	15.25	15.69	25.79	30.00	-4.21

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.28	4.68	14.79	24.00	-9.21
Mid	6185	4.28	4.43	14.67	24.00	-9.33
High	6345	4.73	4.83	15.09	24.00	-8.91

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x 996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	30.00	17.00
Mid	6185	7.30	10.31	30.00	17.00
High	6345	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	15.23	15.95	25.92	30.00	-4.08
Mid	6185	13.92	12.67	23.65	30.00	-6.35
High	6345	17.60	16.81	27.53	30.00	-2.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	7.30	10.31	24.00	-1.00
Mid	6185	7.30	10.31	24.00	-1.00
High	6345	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	7.80	7.03	17.74	24.00	-6.26
Mid	6185	7.83	6.77	17.64	24.00	-6.36
High	6345	7.75	6.91	17.66	24.00	-6.34

9.1.12. 802.11be EHT320 MODE 2TX IN THE UNII-5 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.36	15.70	25.84	30.00	-4.16
High	6265	13.66	13.64	23.96	30.00	-6.04

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.53	7.51	17.83	24.00	-6.17
High	6265	7.30	7.41	17.67	24.00	-6.33

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	16.01	15.80	26.22	30.00	-3.78
High	6265	13.57	13.67	23.93	30.00	-6.07

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.56	7.51	17.85	24.00	-6.15
High	6265	7.26	7.41	17.65	24.00	-6.35

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	16.04	15.85	26.26	30.00	-3.74
High	6265	13.67	13.67	23.98	30.00	-6.02

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.53	7.50	17.83	24.00	-6.17
High	6265	7.30	7.40	17.66	24.00	-6.34

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.89	15.75	26.13	30.00	-3.87
High	6265	13.64	13.67	23.97	30.00	-6.03

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.55	7.49	17.83	24.00	-6.17
High	6265	7.31	7.39	17.66	24.00	-6.34

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.93	15.77	26.16	30.00	-3.84
High	6265	13.67	13.60	23.95	30.00	-6.05

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.50	7.53	17.83	24.00	-6.17
High	6265	4.95	4.95	15.26	24.00	-8.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.84	15.71	26.09	30.00	-3.91
High	6265	13.50	13.48	23.80	30.00	-6.20

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.35	7.32	17.65	24.00	-6.35
High	6265	7.12	7.23	17.49	24.00	-6.51

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.70	15.55	25.94	30.00	-4.06
High	6265	13.42	13.46	23.75	30.00	-6.25

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.35	7.25	17.61	24.00	-6.39
High	6265	7.13	7.15	17.45	24.00	-6.55

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.74	15.68	26.02	30.00	-3.98
High	6265	13.42	13.39	23.72	30.00	-6.28

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.30	7.27	17.60	24.00	-6.40
High	6265	7.09	7.18	17.45	24.00	-6.55

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.89	15.68	26.10	30.00	-3.90
High	6265	13.57	13.52	23.86	30.00	-6.14

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.45	7.43	17.75	24.00	-6.25
High	6265	7.22	7.34	17.59	24.00	-6.41

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.85	15.72	26.10	30.00	-3.90
High	6265	13.56	13.61	23.90	30.00	-6.10

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.44	7.42	17.74	24.00	-6.26
High	6265	7.20	7.33	17.58	24.00	-6.42

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.85	15.69	26.08	30.00	-3.92
High	6265	13.58	13.53	23.87	30.00	-6.13

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.42	7.41	17.73	24.00	-6.27
High	6265	7.22	7.30	17.57	24.00	-6.43

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.81	15.60	26.02	30.00	-3.98
High	6265	13.45	13.47	23.77	30.00	-6.23

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.48	7.38	17.74	24.00	-6.26
High	6265	7.25	7.27	17.57	24.00	-6.43

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.86	15.67	26.08	30.00	-3.92
High	6265	13.56	13.61	23.90	30.00	-6.10

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.47	7.39	17.74	24.00	-6.26
High	6265	7.21	7.31	17.57	24.00	-6.43

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.80	15.66	26.04	30.00	-3.96
High	6265	13.57	13.52	23.86	30.00	-6.14

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.50	7.44	17.78	24.00	-6.22
High	6265	7.22	7.29	17.57	24.00	-6.43

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	15.85	15.76	26.12	30.00	-3.88
High	6265	13.55	13.57	23.87	30.00	-6.13

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.47	7.41	17.75	24.00	-6.25
High	6265	7.22	7.30	17.57	24.00	-6.43

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	30.00	17.00
High	6265	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	17.28	17.65	27.78	30.00	-2.22
High	6265	16.50	16.70	26.91	30.00	-3.09

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	7.30	10.31	24.00	-1.00
High	6265	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	11.45	9.88	21.05	24.00	-2.95
High	6265	11.06	9.77	20.77	24.00	-3.23

9.1.13. 802.11a MODE 2TX IN THE UNII-5 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	30.00	17.00
Mid	6175	8.60	11.61	30.00	17.00
High	6415	8.60	11.61	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	12.95	13.79	25.00	30.00	-5.00
Mid	6175	13.18	13.43	24.92	30.00	-5.08
High	6415	13.62	14.15	25.50	30.00	-4.50

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5955	1.52	1.84	16.30	17.00	-0.70
Mid	6175	1.54	1.85	16.32	17.00	-0.68
High	6415	1.49	1.85	16.30	17.00	-0.70

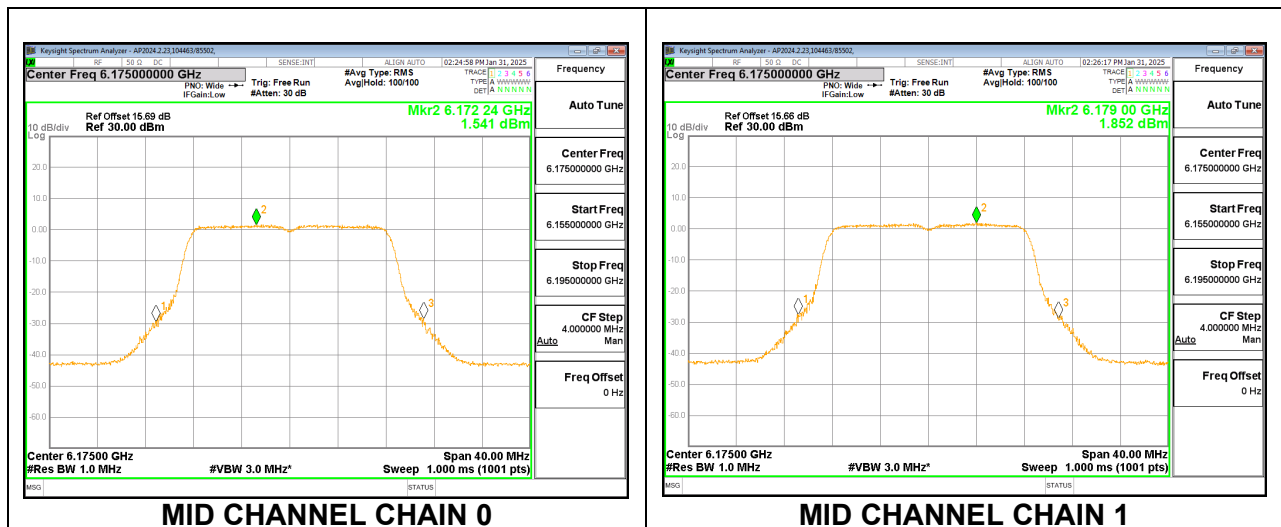

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	24.00	-1.00
Mid	6175	8.60	11.61	24.00	-1.00
High	6415	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-5.76	-5.22	6.13	24.00	-17.87
Mid	6175	-5.82	-4.95	6.25	24.00	-17.75
High	6415	-4.98	-4.43	6.91	24.00	-17.09

9.1.14. 802.11be EHT20 MODE 2TX IN THE UNII-5 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	30.00	17.00
Mid	6175	8.60	11.61	30.00	17.00
High	6415	8.60	11.61	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	3.81	4.43	15.74	30.00	-14.26
Mid	6175	3.99	4.20	15.71	30.00	-14.29
High	6415	4.43	5.05	16.36	30.00	-13.64

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5955	0.93	1.58	15.88	17.00	-1.12
Mid	6175	0.92	1.32	15.75	17.00	-1.25
High	6415	0.85	1.19	15.64	17.00	-1.36

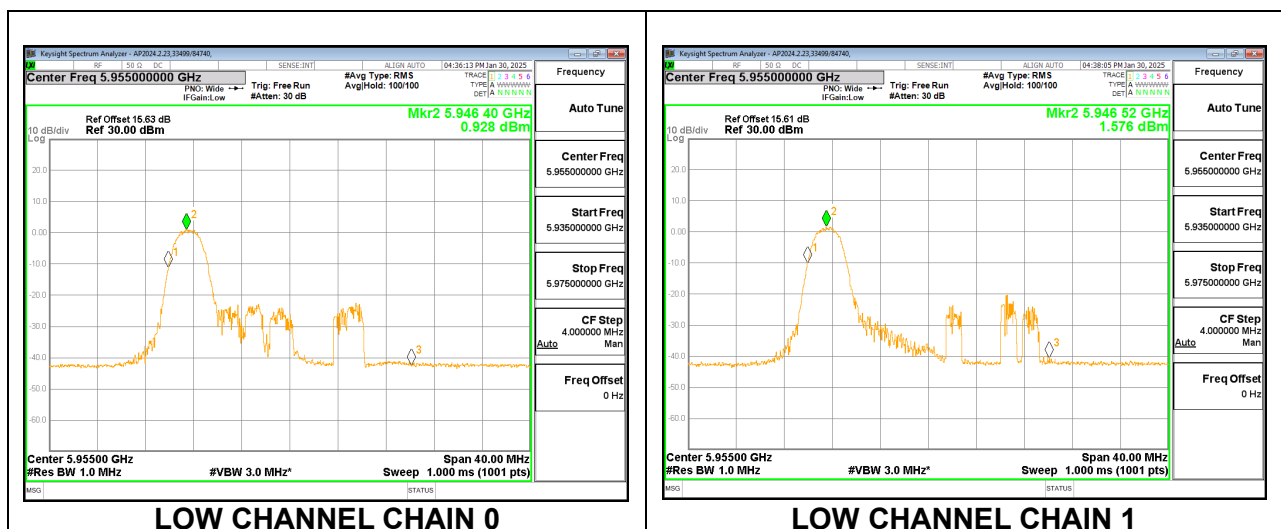

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	24.00	-1.00
Mid	6175	8.60	11.61	24.00	-1.00
High	6415	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-14.22	-13.79	-2.39	24.00	-26.39
Mid	6175	-14.78	-13.73	-2.61	24.00	-26.61
High	6415	-13.51	-13.03	-1.65	24.00	-25.65

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	30.00	17.00
Mid	6175	8.60	11.61	30.00	17.00
High	6415	8.60	11.61	30.00	17.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	7.52	7.79	19.27	30.00	-10.73
Mid	6175	7.95	8.23	19.70	30.00	-10.30
High	6415	7.75	8.43	19.71	30.00	-10.29

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5955	1.51	1.42	16.08	17.00	-0.92
Mid	6175	1.53	1.76	16.27	17.00	-0.73
High	6415	1.62	1.39	16.13	17.00	-0.87

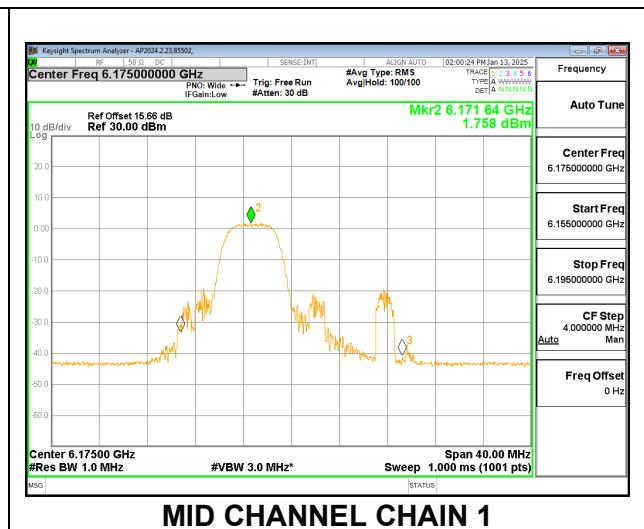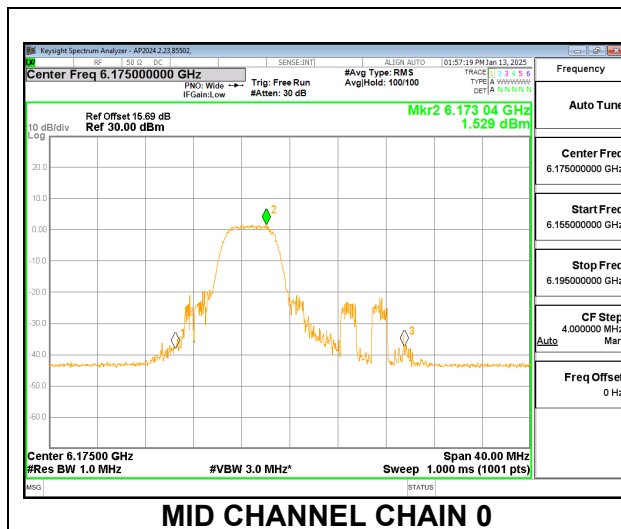

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	24.00	-1.00
Mid	6175	8.60	11.61	24.00	-1.00
High	6415	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-11.29	-10.80	0.57	24.00	-23.43
Mid	6175	-11.61	-10.61	0.53	24.00	-23.47
High	6415	-10.67	-10.21	1.18	24.00	-22.82

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	30.00	17.00
Mid	6175	8.60	11.61	30.00	17.00
High	6415	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	7.78	8.30	19.66	30.00	-10.34
Mid	6175	7.98	8.16	19.68	30.00	-10.32
High	6415	8.09	9.17	20.27	30.00	-9.73

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	24.00	-1.00
Mid	6175	8.60	11.61	24.00	-1.00
High	6415	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-11.49	-10.84	0.46	24.00	-23.54
Mid	6175	-11.50	-10.53	0.62	24.00	-23.38
High	6415	-10.73	-10.25	1.13	24.00	-22.87

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	30.00	17.00
Mid	6175	8.60	11.61	30.00	17.00
High	6415	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	9.09	9.82	21.08	30.00	-8.92
Mid	6175	9.14	9.66	21.02	30.00	-8.98
High	6415	9.49	10.05	21.39	30.00	-8.61

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	24.00	-1.00
Mid	6175	8.60	11.61	24.00	-1.00
High	6415	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-11.43	-10.84	0.49	24.00	-23.51
Mid	6175	-11.50	-10.55	0.61	24.00	-23.39
High	6415	-10.67	-10.21	1.18	24.00	-22.82

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	30.00	17.00
Mid	6175	8.60	11.61	30.00	17.00
High	6415	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	9.11	9.82	21.09	30.00	-8.91
Mid	6175	9.16	9.60	21.00	30.00	-9.00
High	6415	9.56	10.11	21.45	30.00	-8.55

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	24.00	-1.00
Mid	6175	8.60	11.61	24.00	-1.00
High	6415	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-8.47	-7.89	3.44	24.00	-20.56
Mid	6175	-8.55	-7.58	3.57	24.00	-20.43
High	6415	-7.76	-7.23	4.12	24.00	-19.88

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	30.00	17.00
Mid	6175	8.60	11.61	30.00	17.00
High	6415	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	13.01	13.87	25.07	30.00	-4.93
Mid	6175	13.77	13.97	25.48	30.00	-4.52
High	6415	13.64	14.24	25.56	30.00	-4.44

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5955	8.60	11.61	24.00	-1.00
Mid	6175	8.60	11.61	24.00	-1.00
High	6415	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	-6.07	-5.55	5.81	24.00	-18.19
Mid	6175	-6.07	-5.13	6.04	24.00	-17.96
High	6415	-5.23	-4.76	6.62	24.00	-17.38

9.1.15. 802.11be EHT40 MODE 2TX IN THE UNII-5 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5965	8.60	11.61	30.00	17.00
Mid	6165	8.60	11.61	30.00	17.00
High	6405	8.60	11.61	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5965	16.13	17.07	28.24	30.00	-1.76
Mid	6165	17.83	17.55	29.30	30.00	-0.70
High	6405	17.43	17.50	29.08	30.00	-0.92

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5965	1.49	1.58	16.15	17.00	-0.85
Mid	6165	1.33	2.03	16.31	17.00	-0.69
High	6405	1.78	1.92	16.47	17.00	-0.53

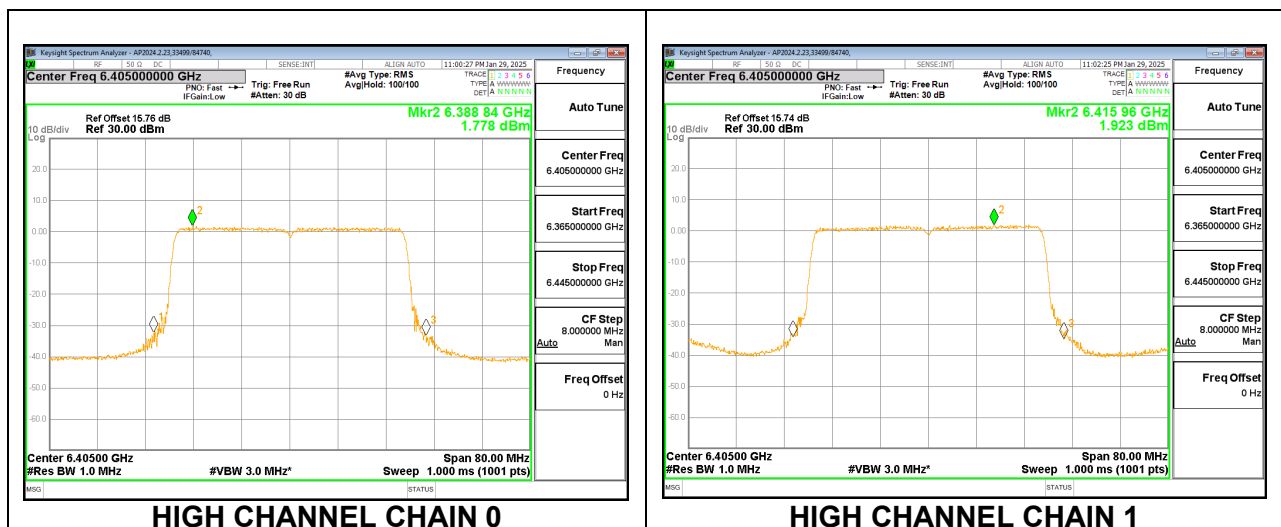

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5965	8.60	11.61	24.00	-1.00
Mid	6165	8.60	11.61	24.00	-1.00
High	6405	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5965	-1.91	-1.50	9.91	24.00	-14.09
Mid	6165	-1.90	-1.14	10.11	24.00	-13.89
High	6405	-1.26	-0.62	10.68	24.00	-13.32

9.1.16. 802.11be EHT80 MODE 2TX IN THE UNII-5 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	8.60	11.61	30.00	17.00
Mid	6145	8.60	11.61	30.00	17.00
High	6385	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	16.26	17.21	28.37	30.00	-1.63
Mid	6145	17.66	17.43	29.16	30.00	-0.84
High	6385	17.44	17.40	29.03	30.00	-0.97

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	8.60	11.61	24.00	-1.00
Mid	6145	8.60	11.61	24.00	-1.00
High	6385	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	-1.85	-1.42	9.98	24.00	-14.02
Mid	6145	-1.97	-1.27	10.00	24.00	-14.00
High	6385	-1.14	-0.60	10.75	24.00	-13.25

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	8.60	11.61	30.00	17.00
Mid	6145	8.60	11.61	30.00	17.00
High	6385	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	16.28	17.15	28.35	30.00	-1.65
Mid	6145	17.61	17.44	29.14	30.00	-0.86
High	6385	17.36	17.37	28.98	30.00	-1.02

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	8.60	11.61	24.00	-1.00
Mid	6145	8.60	11.61	24.00	-1.00
High	6385	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	-1.93	-1.53	9.88	24.00	-14.12
Mid	6145	-2.10	-1.34	9.91	24.00	-14.09
High	6385	-1.20	-0.58	10.73	24.00	-13.27

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	8.60	11.61	30.00	17.00
Mid	6145	8.60	11.61	30.00	17.00
High	6385	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	16.29	17.11	28.33	30.00	-1.67
Mid	6145	17.58	17.38	29.09	30.00	-0.91
High	6385	17.37	17.30	28.95	30.00	-1.05

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	8.60	11.61	24.00	-1.00
Mid	6145	8.60	11.61	24.00	-1.00
High	6385	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	-2.02	-1.59	9.81	24.00	-14.19
Mid	6145	-2.04	-1.30	9.96	24.00	-14.04
High	6385	-1.20	-0.55	10.75	24.00	-13.25

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	8.60	11.61	30.00	17.00
Mid	6145	8.60	11.61	30.00	17.00
High	6385	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	14.59	15.50	26.68	30.00	-3.32
Mid	6145	15.61	16.20	27.53	30.00	-2.47
High	6385	17.35	17.40	28.99	30.00	-1.01

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	5985	8.60	11.61	24.00	-1.00
Mid	6145	8.60	11.61	24.00	-1.00
High	6385	8.60	11.61	24.00	-1.00


Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5985	0.99	1.67	12.95	24.00	-11.05
Mid	6145	1.30	2.14	13.35	24.00	-10.65
High	6385	2.16	2.72	14.06	24.00	-9.94

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	5985	-18.79	-17.38	-3.32	-1.00	-2.32
Mid	6145	-20.03	-17.08	-3.60	-1.00	-2.60
High	6385	-19.62	-16.89	-3.34	-1.00	-2.34

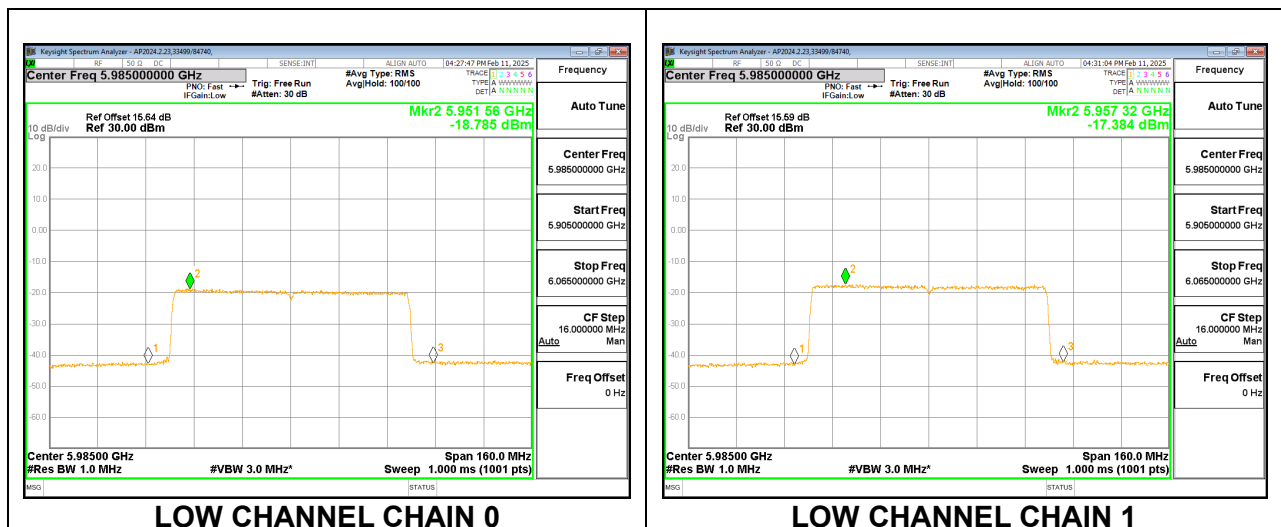

9.1.17. 802.11be EHT160 MODE 2TX IN THE UNII-5 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.84	15.76	26.93	30.00	-3.07
Mid	6185	16.24	16.02	27.74	30.00	-2.26
High	6345	15.33	15.57	27.06	30.00	-2.94

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	1.03	2.18	13.25	24.00	-10.75
Mid	6185	1.75	2.58	13.80	24.00	-10.20
High	6345	2.45	2.97	14.33	24.00	-9.67

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.82	15.65	26.87	30.00	-3.13
Mid	6185	16.40	16.08	27.85	30.00	-2.15
High	6345	15.35	15.63	27.10	30.00	-2.90

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	0.74	1.89	12.96	24.00	-11.04
Mid	6185	1.52	2.28	13.53	24.00	-10.47
High	6345	2.18	2.63	14.02	24.00	-9.98

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.82	15.60	26.84	30.00	-3.16
Mid	6185	16.29	16.02	27.77	30.00	-2.23
High	6345	15.45	15.52	27.10	30.00	-2.90

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	0.61	1.75	12.83	24.00	-11.17
Mid	6185	1.51	2.38	13.58	24.00	-10.42
High	6345	2.18	2.68	14.05	24.00	-9.95

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.37	15.17	26.40	30.00	-3.60
Mid	6185	15.37	15.83	27.22	30.00	-2.78
High	6345	15.29	15.63	27.07	30.00	-2.93

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	0.49	1.60	12.69	24.00	-11.31
Mid	6185	1.31	2.14	13.36	24.00	-10.64
High	6345	1.99	2.49	13.86	24.00	-10.14

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.31	15.16	26.37	30.00	-3.63
Mid	6185	15.43	15.75	27.20	30.00	-2.80
High	6345	15.29	15.73	27.13	30.00	-2.87

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	0.51	1.68	12.74	24.00	-11.26
Mid	6185	1.24	2.13	13.32	24.00	-10.68
High	6345	1.90	2.46	13.80	24.00	-10.20

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.38	15.22	26.43	30.00	-3.57
Mid	6185	15.39	15.72	27.17	30.00	-2.83
High	6345	15.27	15.60	27.05	30.00	-2.95

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	0.23	1.43	12.48	24.00	-11.52
Mid	6185	1.15	1.99	13.20	24.00	-10.80
High	6345	1.70	2.27	13.60	24.00	-10.40

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.38	15.13	26.38	30.00	-3.62
Mid	6185	15.39	15.61	27.11	30.00	-2.89
High	6345	15.24	15.59	27.03	30.00	-2.97

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	0.44	1.59	12.66	24.00	-11.34
Mid	6185	1.27	2.07	13.30	24.00	-10.70
High	6345	1.85	2.39	13.74	24.00	-10.26

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.35	15.11	26.36	30.00	-3.64
Mid	6185	15.32	15.65	27.10	30.00	-2.90
High	6345	15.25	15.60	27.04	30.00	-2.96

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	0.38	1.48	12.58	24.00	-11.42
Mid	6185	1.37	2.14	13.38	24.00	-10.62
High	6345	1.97	2.51	13.86	24.00	-10.14

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.29	15.16	26.36	30.00	-3.64
Mid	6185	15.29	15.59	27.05	30.00	-2.95
High	6345	15.29	15.75	27.14	30.00	-2.86

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	0.40	1.44	12.56	24.00	-11.44
Mid	6185	1.33	2.04	13.31	24.00	-10.69
High	6345	1.95	2.43	13.81	24.00	-10.19

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.33	15.12	26.35	30.00	-3.65
Mid	6185	15.27	15.59	27.04	30.00	-2.96
High	6345	15.25	15.69	27.09	30.00	-2.91

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	0.25	1.42	12.48	24.00	-11.52
Mid	6185	1.24	1.93	13.21	24.00	-10.79
High	6345	1.78	2.31	13.66	24.00	-10.34

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x 996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	30.00	17.00
Mid	6185	8.60	11.61	30.00	17.00
High	6345	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	14.71	15.63	26.80	30.00	-3.20
Mid	6185	13.92	12.67	24.95	30.00	-5.05
High	6345	17.60	16.81	28.83	30.00	-1.17

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6025	8.60	11.61	24.00	-1.00
Mid	6185	8.60	11.61	24.00	-1.00
High	6345	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6025	4.70	5.45	16.70	24.00	-7.30
Mid	6185	4.72	5.11	16.53	24.00	-7.47
High	6345	5.13	6.03	17.21	24.00	-6.79

9.1.18. 802.11be EHT320 MODE 2TX IN THE UNII-5 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.31	14.81	26.18	30.00	-3.82
High	6265	13.66	13.64	25.26	30.00	-4.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.99	5.61	16.92	24.00	-7.08
High	6265	5.27	6.13	17.33	24.00	-6.67

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.43	14.90	26.28	30.00	-3.72
High	6265	13.57	13.67	25.23	30.00	-4.77

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.98	5.61	16.92	24.00	-7.08
High	6265	5.12	6.15	17.28	24.00	-6.72

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.39	14.78	26.20	30.00	-3.80
High	6265	13.67	13.67	25.28	30.00	-4.72

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	5.00	5.51	16.87	24.00	-7.13
High	6265	5.15	6.17	17.30	24.00	-6.70

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.34	14.82	26.20	30.00	-3.80
High	6265	13.64	13.67	25.27	30.00	-4.73

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.96	5.54	16.87	24.00	-7.13
High	6265	5.14	6.15	17.28	24.00	-6.72

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.26	14.85	26.18	30.00	-3.82
High	6265	13.67	13.60	25.25	30.00	-4.75

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.96	5.58	16.89	24.00	-7.11
High	6265	5.29	6.20	17.38	24.00	-6.62

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.29	14.62	26.07	30.00	-3.93
High	6265	13.50	13.48	25.10	30.00	-4.90

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.85	5.41	16.75	24.00	-7.25
High	6265	5.09	6.04	17.20	24.00	-6.80

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	13.88	14.09	25.60	30.00	-4.40
High	6265	13.42	13.46	25.05	30.00	-4.95

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.72	5.40	16.68	24.00	-7.32
High	6265	4.97	5.97	17.11	24.00	-6.89

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	13.80	14.27	25.65	30.00	-4.35
High	6265	13.42	13.39	25.02	30.00	-4.98

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.81	5.40	16.73	24.00	-7.27
High	6265	4.99	6.01	17.14	24.00	-6.86

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.38	14.92	26.27	30.00	-3.73
High	6265	13.57	13.52	25.16	30.00	-4.84

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.92	5.46	16.81	24.00	-7.19
High	6265	5.17	6.07	17.25	24.00	-6.75

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.82	15.02	26.53	30.00	-3.47
High	6265	13.56	13.61	25.20	30.00	-4.80

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.87	5.49	16.80	24.00	-7.20
High	6265	5.05	6.12	17.23	24.00	-6.77

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.43	14.76	26.21	30.00	-3.79
High	6265	13.58	13.53	25.17	30.00	-4.83

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.87	5.42	16.76	24.00	-7.24
High	6265	5.01	6.01	17.15	24.00	-6.85

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.34	14.81	26.19	30.00	-3.81
High	6265	13.45	13.47	25.07	30.00	-4.93

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.85	5.42	16.75	24.00	-7.25
High	6265	5.05	6.06	17.19	24.00	-6.81

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.10	15.00	26.18	30.00	-3.82
High	6265	13.56	13.61	25.20	30.00	-4.80

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.85	5.41	16.75	24.00	-7.25
High	6265	5.02	6.06	17.18	24.00	-6.82

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	13.88	14.40	25.76	30.00	-4.24
High	6265	13.57	13.52	25.16	30.00	-4.84

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.86	5.44	16.77	24.00	-7.23
High	6265	5.23	6.02	17.25	24.00	-6.75

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	14.44	14.93	26.30	30.00	-3.70
High	6265	13.55	13.57	25.17	30.00	-4.83

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	4.88	5.48	16.80	24.00	-7.20
High	6265	5.04	6.05	17.18	24.00	-6.82

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	30.00	17.00
High	6265	8.60	11.61	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	17.28	17.65	29.08	30.00	-0.92
High	6265	16.50	16.70	28.21	30.00	-1.79

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6105	8.60	11.61	24.00	-1.00
High	6265	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6105	7.64	8.00	19.43	24.00	-4.57
High	6265	7.50	8.16	19.45	24.00	-4.55

9.1.19. 802.11a MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	5.20	8.21	24.00	-1.00
Mid	6475	5.20	8.21	24.00	-1.00
High	6515	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-1.80	-0.82	6.93	24.00	-17.07
Mid	6475	-1.99	-0.91	6.79	24.00	-17.21
High	6515	-1.98	-0.94	6.78	24.00	-17.22

9.1.20. 802.11be EHT20 MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	5.20	8.21	24.00	-1.00
Mid	6475	5.20	8.21	24.00	-1.00
High	6515	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-10.83	-9.90	-2.13	24.00	-26.13
Mid	6475	-9.25	-7.63	-0.15	24.00	-24.15
High	6515	-11.45	-10.03	-2.47	24.00	-26.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	5.20	8.21	24.00	-1.00
Mid	6475	5.20	8.21	24.00	-1.00
High	6515	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-7.76	-6.63	1.05	24.00	-22.95
Mid	6475	-6.68	-5.11	2.39	24.00	-21.61
High	6515	-8.20	-6.85	0.74	24.00	-23.26

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	5.20	8.21	24.00	-1.00
Mid	6475	5.20	8.21	24.00	-1.00
High	6515	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-6.67	-5.49	2.17	24.00	-21.83
Mid	6475	-7.04	-5.42	2.06	24.00	-21.94
High	6515	-7.18	-5.76	1.80	24.00	-22.20

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	5.20	8.21	24.00	-1.00
Mid	6475	5.20	8.21	24.00	-1.00
High	6515	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-5.05	-3.78	3.84	24.00	-20.16
Mid	6475	-5.33	-3.74	3.75	24.00	-20.25
High	6515	-5.46	-4.08	3.49	24.00	-20.51

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	5.20	8.21	24.00	-1.00
Mid	6475	5.20	8.21	24.00	-1.00
High	6515	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-4.55	-3.28	4.34	24.00	-19.66
Mid	6475	-4.81	-3.35	4.19	24.00	-19.81
High	6515	-4.95	-3.50	4.05	24.00	-19.95

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	5.20	8.21	24.00	-1.00
Mid	6475	5.20	8.21	24.00	-1.00
High	6515	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-2.36	-1.16	6.49	24.00	-17.51
Mid	6475	-2.65	-1.13	6.39	24.00	-17.61
High	6515	-2.79	-1.23	6.27	24.00	-17.73

9.1.21. 802.11be EHT40 MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6445	5.20	8.21	24.00	-1.00
Mid	6485	5.20	8.21	24.00	-1.00
High	6525	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6445	2.13	2.21	10.38	24.00	-13.62
Mid	6485	2.00	2.13	10.28	24.00	-13.72
High	6525	2.07	1.80	10.15	24.00	-13.85

9.1.22. 802.11be EHT80 MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	5.20	8.21	24.00	-1.00
High	6545	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	2.24	2.24	10.45	24.00	-13.55
High	6545	1.81	1.63	9.93	24.00	-14.07

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	5.20	8.21	24.00	-1.00
High	6545	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	1.93	2.01	10.18	24.00	-13.82
High	6545	1.81	1.60	9.92	24.00	-14.08

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	5.20	8.21	24.00	-1.00
High	6545	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	1.89	1.94	10.13	24.00	-13.87
High	6545	1.70	1.41	9.77	24.00	-14.23

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	5.20	8.21	24.00	-1.00
High	6545	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	1.93	2.10	10.23	24.00	-13.77
High	6545	1.73	1.50	9.83	24.00	-14.17

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	5.20	8.21	24.00	-1.00
High	6545	5.20	8.21	24.00	-1.00



Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	4.34	5.12	12.96	24.00	-11.04
High	6545	4.75	4.62	12.90	24.00	-11.10

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6465	-13.00	-13.62	-1.99	-1.00	-0.99
High	6545	-13.18	-13.78	-2.16	-1.00	-1.16

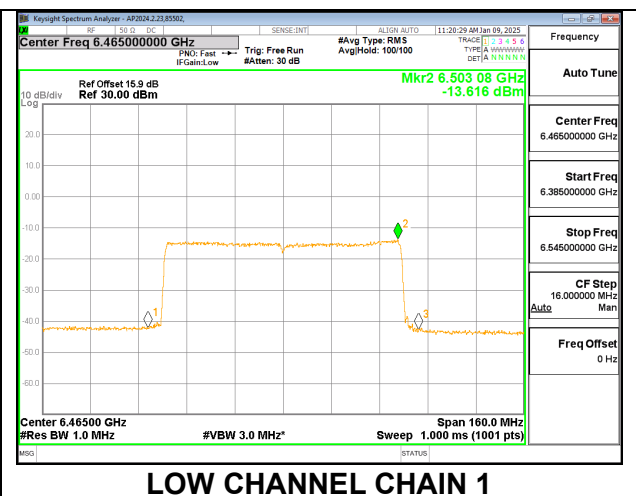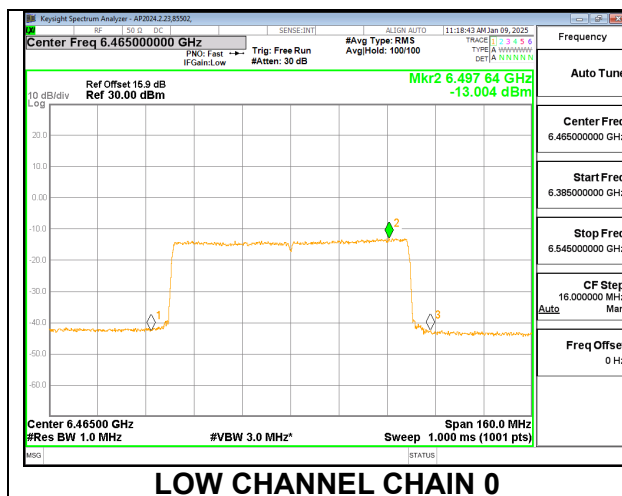

9.1.23. 802.11be EHT160 MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.98	4.90	13.15	24.00	-10.85

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.74	4.62	12.89	24.00	-11.11

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	3.65	3.48	11.78	24.00	-12.22

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.65	4.38	12.73	24.00	-11.27

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) PUNCTURED 0x80
MODE – LOW POWER INDOOR**

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.77	3.19	12.26	24.00	-11.74

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) PUNCTURED 0x01
MODE – LOW POWER INDOOR**

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.80	3.06	12.23	24.00	-11.77

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.80	3.22	12.29	24.00	-11.71

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.65	2.94	12.09	24.00	-11.91

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.76	3.03	12.19	24.00	-11.81

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.75	3.01	12.18	24.00	-11.82

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.70	2.97	12.13	24.00	-11.87

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.74	2.96	12.15	24.00	-11.85

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	8.26	6.86	15.83	24.00	-8.17

9.1.24. 802.11be EHT320 MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS LOW MRU 6) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	8.96	8.67	17.03	24.00	-6.97
High	6585	8.35	8.17	16.47	24.00	-7.53

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS LOW MRU1) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.23	8.90	17.28	24.00	-6.72
High	6585	8.64	8.36	16.71	24.00	-7.29

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS HIGH MRU 7) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.04	8.51	16.99	24.00	-7.01
High	6585	8.17	7.90	16.25	24.00	-7.75

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS HIGH MRU12) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	10.02	7.45	17.13	24.00	-6.87
High	6585	9.27	6.95	16.47	24.00	-7.53

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS LOW MRU5) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.05	8.66	17.07	24.00	-6.93
High	6585	8.32	8.21	16.48	24.00	-7.52

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS HIGH MRU11) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.91	7.44	17.06	24.00	-6.94
High	6585	9.38	6.96	16.55	24.00	-7.45

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.26	8.82	17.26	24.00	-6.74
High	6585	8.54	8.21	16.59	24.00	-7.41

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.91	7.35	17.03	24.00	-6.97
High	6585	9.24	6.80	16.40	24.00	-7.60

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS LOW MRU3) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.20	8.77	17.20	24.00	-6.80
High	6585	8.48	8.20	16.55	24.00	-7.45

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS HIGH MRU9) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.85	7.36	16.99	24.00	-7.01
High	6585	9.27	6.85	16.44	24.00	-7.56

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2 LOW MRU4)
– LOW POWER INDOOR**

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.40	8.80	17.32	24.00	-6.68
High	6585	8.60	8.35	16.69	24.00	-7.31

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2 HIGH
MRU10) – LOW POWER INDOOR**

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.93	7.46	17.08	24.00	-6.92
High	6585	9.33	6.95	16.51	24.00	-7.49

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.25	8.62	17.16	24.00	-6.84
High	6585	8.53	8.12	16.54	24.00	-7.46

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.13	8.47	17.02	24.00	-6.98
High	6585	8.27	7.90	16.30	24.00	-7.70

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.07	8.41	16.96	24.00	-7.04
High	6585	8.33	7.95	16.35	24.00	-7.65

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.20	8.59	17.12	24.00	-6.88
High	6585	8.52	8.13	16.54	24.00	-7.46

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.34	8.70	17.24	24.00	-6.76
High	6585	8.55	8.19	16.58	24.00	-7.42

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.27	8.67	17.19	24.00	-6.81
High	6585	8.46	8.08	16.48	24.00	-7.52

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.05	8.67	17.07	24.00	-6.93
High	6585	8.66	8.19	16.64	24.00	-7.36

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.23	8.59	17.13	24.00	-6.87
High	6585	8.24	8.11	16.39	24.00	-7.61

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	8.92	8.61	16.98	24.00	-7.02
High	6585	8.24	8.12	16.39	24.00	-7.61

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	8.93	8.59	16.97	24.00	-7.03
High	6585	8.24	8.13	16.40	24.00	-7.60

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	9.05	8.66	17.07	24.00	-6.93
High	6585	8.32	8.21	16.48	24.00	-7.52

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	8.96	8.67	17.03	24.00	-6.97
High	6585	8.35	8.17	16.47	24.00	-7.53

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	5.20	8.21	24.00	-1.00
High	6585	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	12.46	10.43	19.77	24.00	-4.23
High	6585	11.73	9.84	19.10	24.00	-4.90

9.1.25. 802.11a MODE 2TX IN THE UNII-6 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	7.30	10.31	24.00	-1.00
Mid	6475	7.30	10.31	24.00	-1.00
High	6515	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-3.742	-2.853	7.04	24.00	-16.96
Mid	6475	-3.870	-2.996	6.90	24.00	-17.10
High	6515	-4.008	-2.933	6.87	24.00	-17.13

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6435	-15.51	-14.81	-1.83	-1.00	-0.83
Mid	6475	-15.68	-14.71	-1.85	-1.00	-0.85
High	6515	-15.85	-15.03	-2.10	-1.00	-1.10

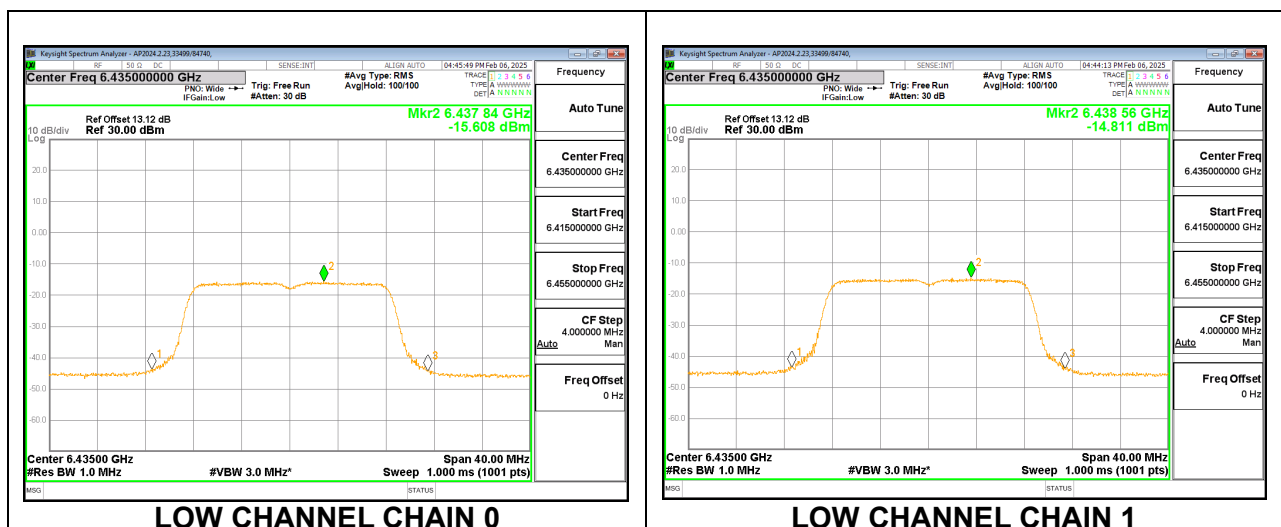

9.1.26. 802.11be EHT20 MODE 2TX IN THE UNII-6 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	7.30	10.31	24.00	-1.00
Mid	6475	7.30	10.31	24.00	-1.00
High	6515	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-11.971	-11.036	-1.17	24.00	-25.17
Mid	6475	-11.561	-10.406	-0.63	24.00	-24.63
High	6515	-12.154	-11.218	-1.35	24.00	-25.35

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6435	-15.58	-14.66	-13.25	-1.00	-12.25
Mid	6475	-15.72	-14.90	-13.45	-1.00	-12.45
High	6515	-15.45	-14.58	-12.61	-1.00	-11.61

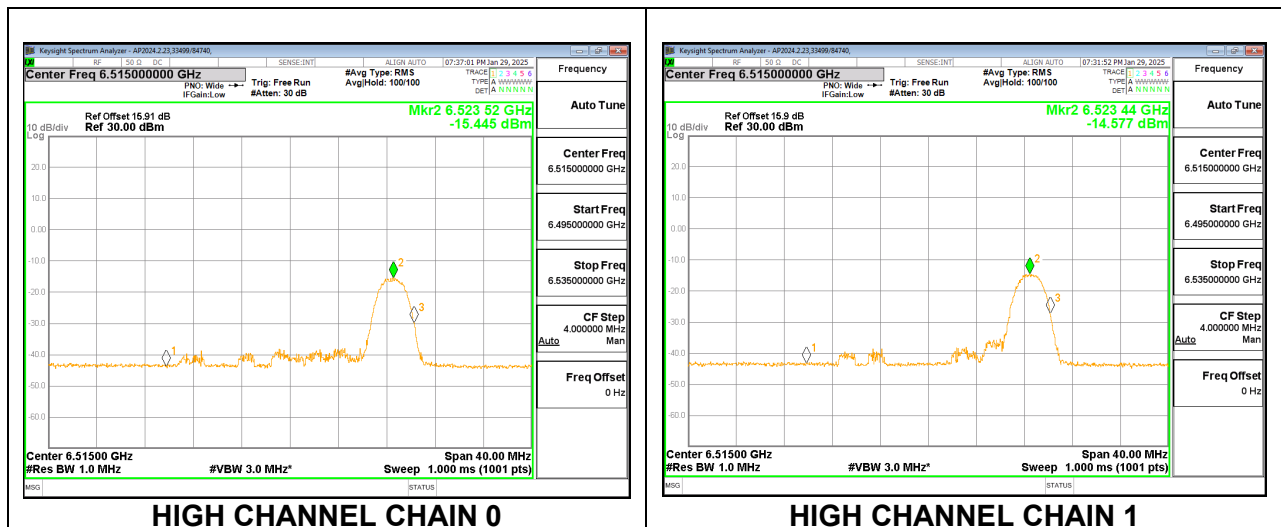

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	7.30	10.31	24.00	-1.00
Mid	6475	7.30	10.31	24.00	-1.00
High	6515	7.30	10.31	24.00	-1.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-9.67	-8.61	1.21	24.00	-22.79
Mid	6475	-9.87	-8.70	1.06	24.00	-22.94
High	6515	-10.26	-9.18	0.62	24.00	-23.38

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6435	-15.99	-14.19	-1.68	-1.00	-0.68
Mid	6475	-15.67	-14.26	-1.59	-1.00	-0.59
High	6515	-16.42	-13.79	-1.59	-1.00	-0.59

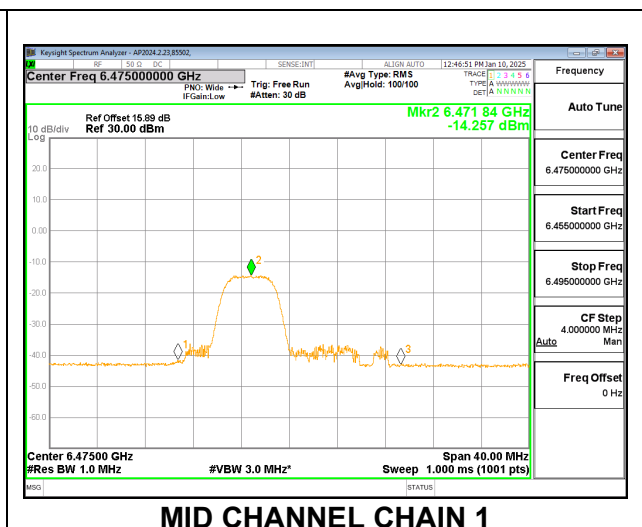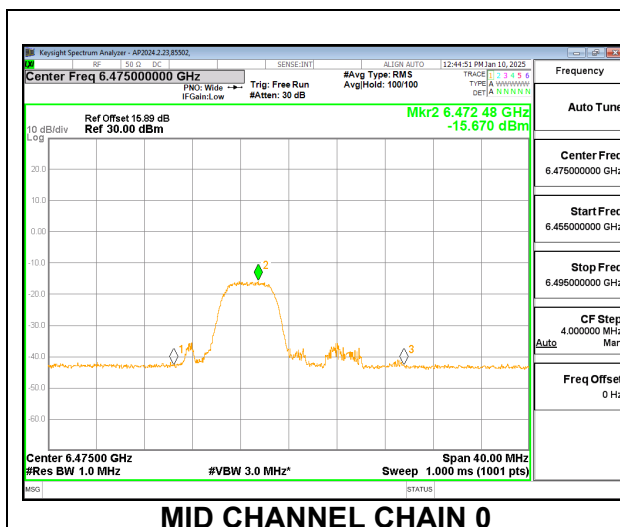

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	7.30	10.31	24.00	-1.00
Mid	6475	7.30	10.31	24.00	-1.00
High	6515	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-9.74	-8.66	1.15	24.00	-22.85
Mid	6475	-9.77	-8.71	1.10	24.00	-22.90
High	6515	-10.40	-9.41	0.44	24.00	-23.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	7.30	10.31	24.00	-1.00
Mid	6475	7.30	10.31	24.00	-1.00
High	6515	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-6.74	-5.57	4.19	24.00	-19.81
Mid	6475	-6.74	-5.61	4.17	24.00	-19.83
High	6515	-6.83	-5.80	4.03	24.00	-19.97

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6435	-15.59	-14.65	-1.77	-1.00	-0.77
Mid	6475	-15.26	-14.45	-1.52	-1.00	-0.52
High	6515	-15.33	-14.48	-1.56	-1.00	-0.56

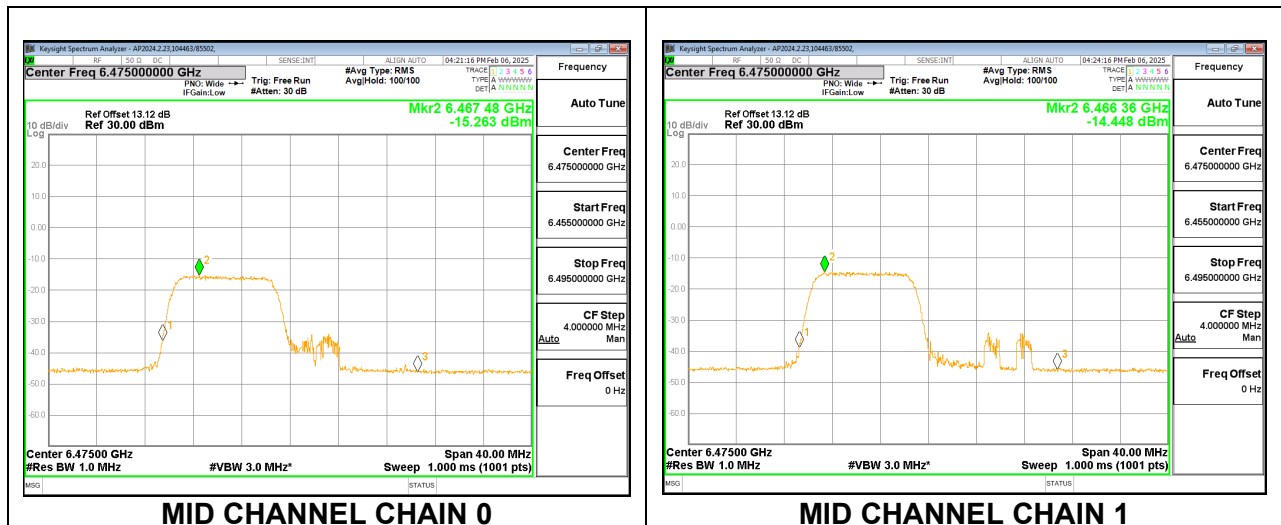

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	7.30	10.31	24.00	-1.00
Mid	6475	7.30	10.31	24.00	-1.00
High	6515	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-6.77	-5.69	4.11	24.00	-19.89
Mid	6475	-6.81	-5.69	4.09	24.00	-19.91
High	6515	-6.91	-5.80	3.99	24.00	-20.01

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	7.30	10.31	24.00	-1.00
Mid	6475	7.30	10.31	24.00	-1.00
High	6515	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-4.15	-3.11	6.71	24.00	-17.29
Mid	6475	-4.39	-3.38	6.46	24.00	-17.54
High	6515	-4.49	-3.38	6.41	24.00	-17.59

9.1.27. 802.11be EHT40 MODE 2TX IN THE UNII-6 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6445	7.30	10.31	24.00	-1.00
Mid	6485	7.30	10.31	24.00	-1.00
High	6525	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6445	-0.09	-0.70	9.92	24.00	-14.08
Mid	6485	-0.15	-0.71	9.89	24.00	-14.11
High	6525	-0.27	-0.70	9.83	24.00	-14.17

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6445	-15.54	-14.68	-1.77	-1.00	-0.77
Mid	6485	-15.45	-14.84	-1.82	-1.00	-0.82
High	6525	-15.19	-14.52	-1.52	-1.00	-0.52

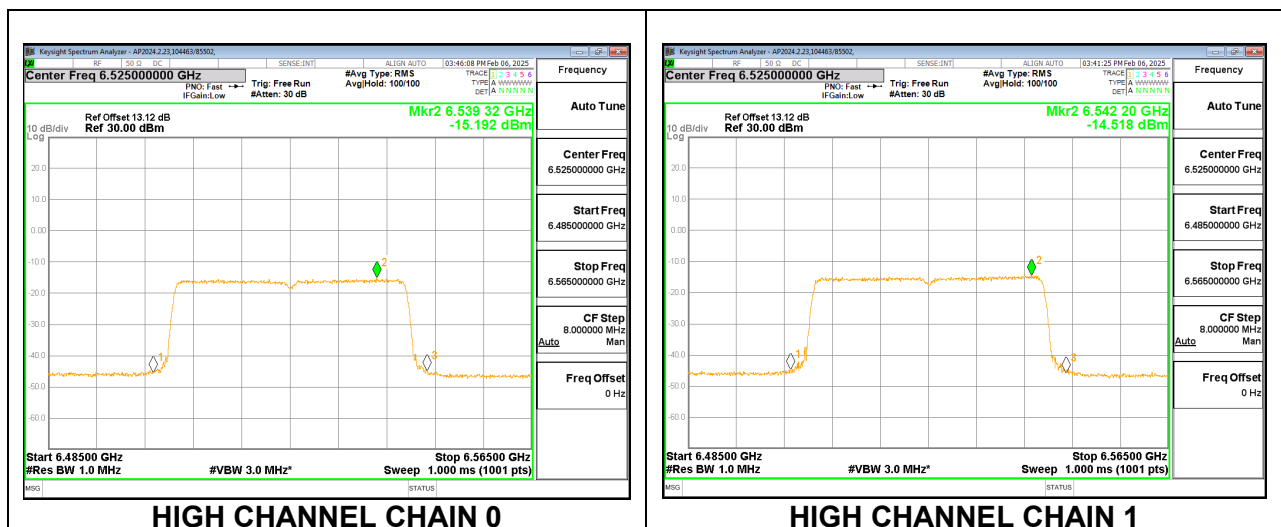

9.1.28. 802.11be EHT80 MODE 2TX IN THE UNII-6 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	7.30	10.31	24.00	-1.00
High	6545	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	-0.08	0.83	10.71	24.00	-13.29
High	6545	-0.27	0.49	10.44	24.00	-13.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	7.30	10.31	24.00	-1.00
High	6545	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	-0.19	0.83	10.66	24.00	-13.34
High	6545	-0.30	0.65	10.51	24.00	-13.49

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	7.30	10.31	24.00	-1.00
High	6545	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	-0.20	0.84	10.66	24.00	-13.34
High	6545	-0.25	0.62	10.52	24.00	-13.48

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	7.30	10.31	24.00	-1.00
High	6545	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	-0.18	0.85	10.67	24.00	-13.33
High	6545	-0.31	0.62	10.49	24.00	-13.51

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	7.30	10.31	24.00	-1.00
High	6545	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	2.20	3.22	13.05	24.00	-10.95
High	6545	2.28	3.00	12.97	24.00	-11.03

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6465	-16.42	-15.25	-2.39	-1.00	-1.39
High	6545	-16.09	-14.68	-1.91	-1.00	-0.91

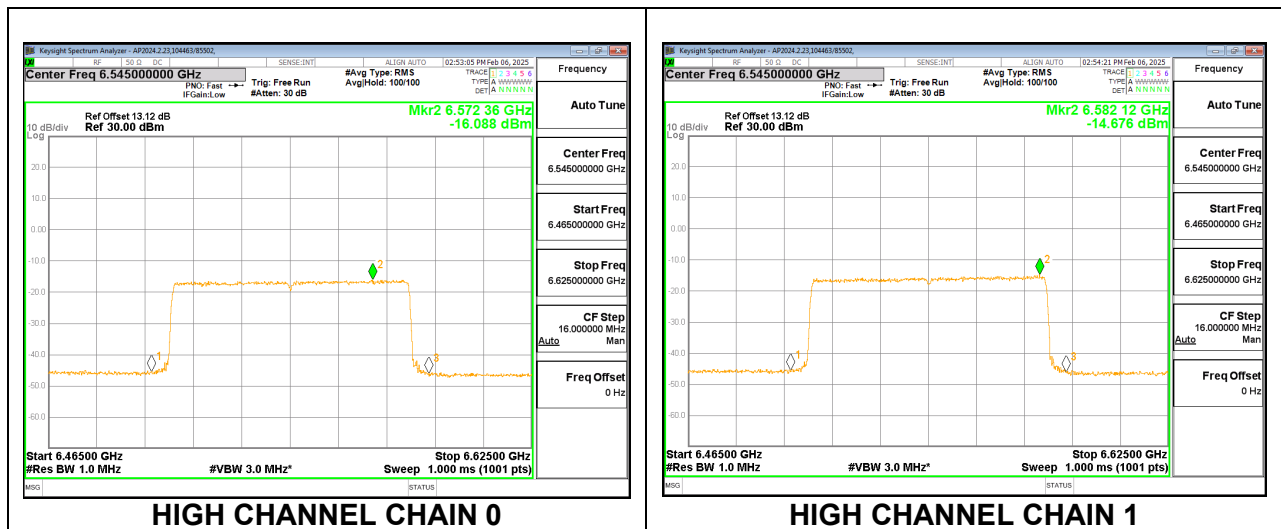

9.1.29. 802.11be EHT160 MODE 2TX IN THE UNII-6 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.81	3.59	13.53	24.00	-10.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.64	3.75	13.54	24.00	-10.46

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.44	3.45	13.28	24.00	-10.72

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.38	3.44	13.25	24.00	-10.75

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) PUNCTURED 0x80
- LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.17	2.97	12.90	24.00	-11.10

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) PUNCTURED 0x01
- LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.08	3.05	12.90	24.00	-11.10

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.17	3.02	12.92	24.00	-11.08

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.05	2.81	12.76	24.00	-11.24

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.18	2.94	12.89	24.00	-11.11

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.14	3.09	12.95	24.00	-11.05

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.10	3.00	12.88	24.00	-11.12

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.99	2.90	12.78	24.00	-11.22

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	4.49	5.73	15.46	24.00	-8.54

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	6505	-15.79	-14.79	-1.94	-1.00	-0.94

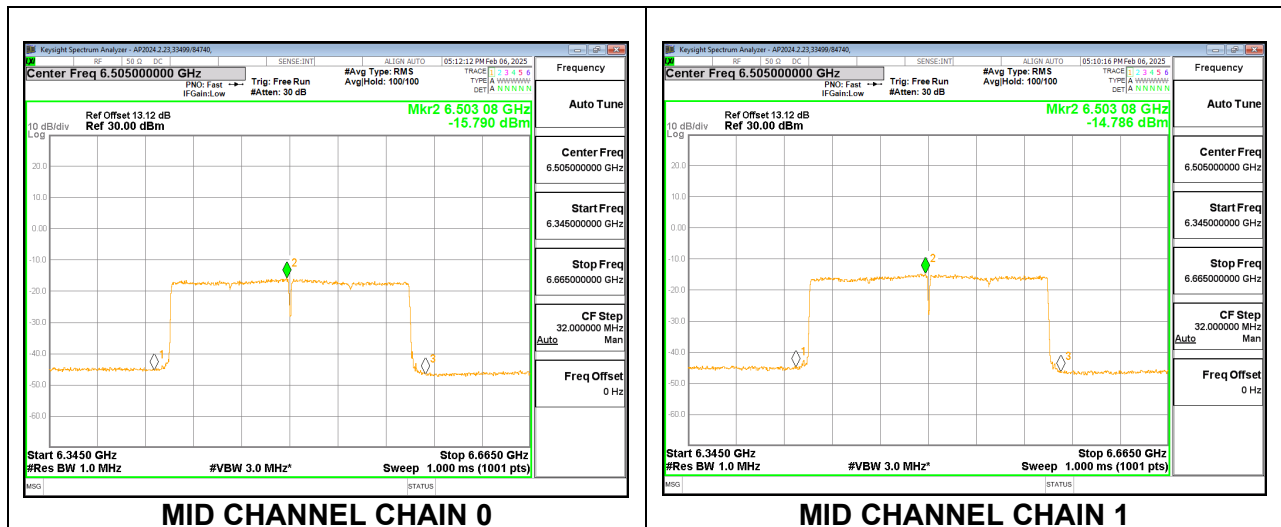

9.1.30. 802.11be EHT320 MODE 2TX IN THE UNII-6 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS LOW MRU 6) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.52	8.75	18.49	24.00	-5.51
High	6585	4.80	6.05	15.78	24.00	-8.22

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS LOW MRU1) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.54	8.56	18.39	24.00	-5.61
High	6585	4.64	5.84	15.59	24.00	-8.41

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS HIGH MRU 7) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.06	8.35	18.06	24.00	-5.94
High	6585	4.29	5.61	15.31	24.00	-8.69

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS HIGH MRU12) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.29	8.47	18.23	24.00	-5.77
High	6585	4.44	5.68	15.41	24.00	-8.59

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS LOW MRU5) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.46	8.62	18.39	24.00	-5.61
High	6585	4.76	6.01	15.74	24.00	-8.26

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS HIGH MRU11) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.22	8.44	18.18	24.00	-5.82
High	6585	4.42	5.69	15.41	24.00	-8.59

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.40	8.60	18.35	24.00	-5.65
High	6585	4.64	5.91	15.63	24.00	-8.37

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.77	6.42	16.42	24.00	-7.58
High	6585	2.72	2.89	13.12	24.00	-10.88

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS LOW MRU3) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.35	8.58	18.32	24.00	-5.68
High	6585	4.82	5.89	15.70	24.00	-8.30

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS HIGH MRU9) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.17	8.34	18.10	24.00	-5.90
High	6585	4.51	5.69	15.45	24.00	-8.55

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2 LOW MRU4)
– LOW POWER INDOOR**

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.51	8.62	18.41	24.00	-5.59
High	6585	4.76	5.98	15.72	24.00	-8.28

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2 HIGH
MRU10) – LOW POWER INDOOR**

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.22	8.40	18.16	24.00	-5.84
High	6585	4.41	5.71	15.42	24.00	-8.58

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.26	8.42	18.19	24.00	-5.81
High	6585	4.56	5.79	15.53	24.00	-8.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.04	8.21	17.97	24.00	-6.03
High	6585	4.22	5.50	15.22	24.00	-8.78

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.00	8.23	17.97	24.00	-6.03
High	6585	4.36	5.63	15.35	24.00	-8.65

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.14	8.30	18.07	24.00	-5.93
High	6585	4.50	5.73	15.47	24.00	-8.53

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.26	8.44	18.20	24.00	-5.80
High	6585	4.51	5.84	15.54	24.00	-8.46

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.23	8.39	18.16	24.00	-5.84
High	6585	4.41	5.71	15.42	24.00	-8.58

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.28	8.49	18.24	24.00	-5.76
High	6585	4.51	5.85	15.54	24.00	-8.46

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.17	8.38	18.13	24.00	-5.87
High	6585	4.44	5.73	15.44	24.00	-8.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.16	8.37	18.12	24.00	-5.88
High	6585	4.41	5.71	15.42	24.00	-8.58

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.20	8.42	18.16	24.00	-5.84
High	6585	4.51	5.74	15.48	24.00	-8.52

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.21	8.41	18.16	24.00	-5.84
High	6585	4.56	5.80	15.53	24.00	-8.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.16	8.45	18.16	24.00	-5.84
High	6585	4.53	5.81	15.53	24.00	-8.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	7.30	10.31	24.00	-1.00
High	6585	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	8.02	9.25	18.99	24.00	-5.01
High	6585	8.23	9.19	19.05	24.00	-4.95

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	6425	-15.35	-14.59	-1.63	-1.00	-0.63
High	6585	-15.58	-14.58	-1.73	-1.00	-0.73

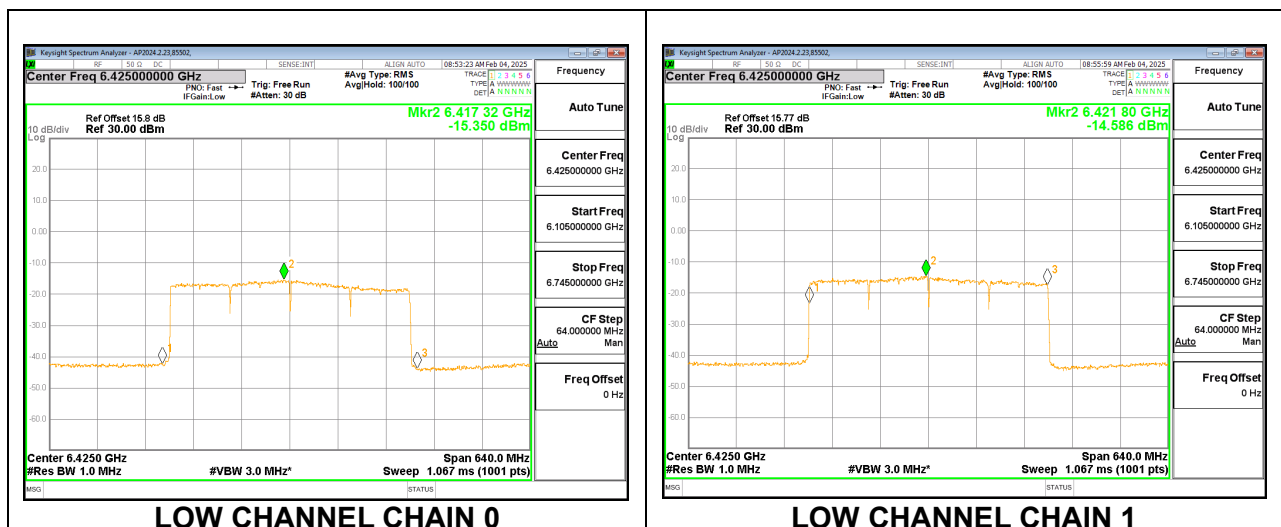

9.1.31. 802.11a MODE 2TX IN THE UNII-6 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	8.60	11.61	24.00	-1.00
Mid	6475	8.60	11.61	24.00	-1.00
High	6515	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-4.77	-4.18	7.15	24.00	-16.85
Mid	6475	-4.81	-4.27	7.08	24.00	-16.92
High	6515	-4.99	-4.23	7.02	24.00	-16.98

9.1.32. 802.11be EHT20 MODE 2TX IN THE UNII-6 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	8.60	11.61	24.00	-1.00
Mid	6475	8.60	11.61	24.00	-1.00
High	6515	8.60	11.61	24.00	-1.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-13.39	-12.91	-1.53	24.00	-25.53
Mid	6475	-13.44	-12.96	-1.58	24.00	-25.58
High	6515	-13.60	-13.07	-1.72	24.00	-25.72

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6435	-17.15	-17.17	-2.54	-1.00	-1.54
Mid	6475	-17.38	-15.29	-1.59	-1.00	-0.59
High	6515	-17.13	-16.30	-2.07	-1.00	-1.07

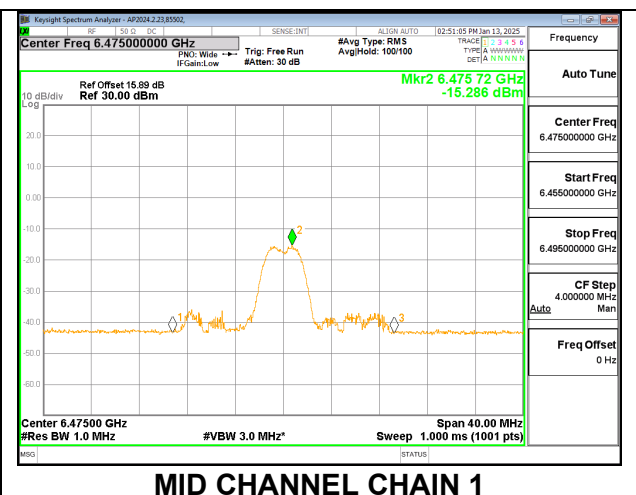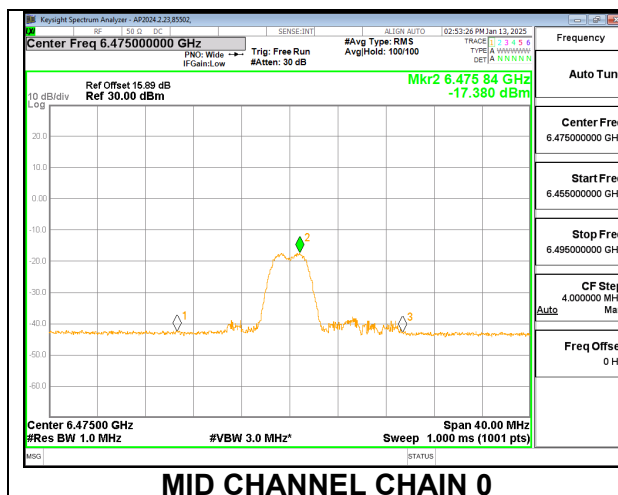

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	8.60	11.61	24.00	-1.00
Mid	6475	8.60	11.61	24.00	-1.00
High	6515	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-10.55	-9.92	1.39	24.00	-22.61
Mid	6475	-10.88	-10.03	1.18	24.00	-22.82
High	6515	-10.73	-10.02	1.25	24.00	-22.75

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	8.60	11.61	24.00	-1.00
Mid	6475	8.60	11.61	24.00	-1.00
High	6515	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-10.80	-9.92	1.27	24.00	-22.73
Mid	6475	-10.79	-10.00	1.23	24.00	-22.77
High	6515	-10.84	-10.22	1.09	24.00	-22.91

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	8.60	11.61	24.00	-1.00
Mid	6475	8.60	11.61	24.00	-1.00
High	6515	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-7.69	-6.96	4.30	24.00	-19.70
Mid	6475	-7.70	-7.05	4.25	24.00	-19.75
High	6515	-7.89	-7.13	4.12	24.00	-19.88

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	8.60	11.61	24.00	-1.00
Mid	6475	8.60	11.61	24.00	-1.00
High	6515	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-7.82	-6.79	4.34	24.00	-19.66
Mid	6475	-7.75	-7.12	4.19	24.00	-19.81
High	6515	-7.88	-7.25	4.06	24.00	-19.94

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6435	8.60	11.61	24.00	-1.00
Mid	6475	8.60	11.61	24.00	-1.00
High	6515	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	-5.17	-4.40	6.84	24.00	-17.16
Mid	6475	-5.31	-4.60	6.67	24.00	-17.33
High	6515	-5.32	-4.68	6.62	24.00	-17.38

9.1.33. 802.11be EHT40 MODE 2TX IN THE UNII-6 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6445	8.60	11.61	24.00	-1.00
Mid	6485	8.60	11.61	24.00	-1.00
High	6525	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6445	-1.22	-0.52	10.75	24.00	-13.25
Mid	6485	-1.23	-0.63	10.69	24.00	-13.31
High	6525	-1.23	-0.60	10.71	24.00	-13.29

9.1.34. 802.11be EHT80 MODE 2TX IN THE UNII-6 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	8.60	11.61	24.00	-1.00
High	6545	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	-1.13	-0.60	10.75	24.00	-13.25
High	6545	-1.28	-0.81	10.57	24.00	-13.43

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	8.60	11.61	24.00	-1.00
High	6545	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	-1.26	-0.59	10.70	24.00	-13.30
High	6545	-1.34	-0.70	10.60	24.00	-13.40

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	8.60	11.61	24.00	-1.00
High	6545	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	-1.21	-0.53	10.75	24.00	-13.25
High	6545	-1.22	-0.91	10.55	24.00	-13.45

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	8.60	11.61	24.00	-1.00
High	6545	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	-1.11	-0.06	11.06	24.00	-12.94
High	6545	-1.30	-0.75	10.59	24.00	-13.41

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6465	8.60	11.61	24.00	-1.00
High	6545	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6465	1.75	2.40	13.70	24.00	-10.30
High	6545	1.61	2.18	13.51	24.00	-10.49

9.1.35. 802.11be EHT160 MODE 2TX IN THE UNII-6 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	2.14	2.67	14.02	24.00	-9.98

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.96	2.89	14.06	24.00	-9.94

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.85	2.52	13.81	24.00	-10.19

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.87	2.49	13.80	24.00	-10.20

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) PUNCTURED 0x80
- LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.72	2.25	13.60	24.00	-10.40

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) PUNCTURED 0x01
- LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.48	2.19	13.46	24.00	-10.54

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.61	2.24	13.55	24.00	-10.45

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.47	1.99	13.35	24.00	-10.65

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.69	2.26	13.59	24.00	-10.41

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.77	2.26	13.63	24.00	-10.37

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.53	2.15	13.46	24.00	-10.54

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	1.47	2.00	13.35	24.00	-10.65

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Mid	6505	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6505	5.34	5.98	17.28	24.00	-6.72

9.1.36. 802.11be EHT320 MODE 2TX IN THE UNII-6 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS LOW MRU 6) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.44	5.37	17.02	24.00	-6.98
High	6585	5.75	6.20	17.59	24.00	-6.41

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS LOW MRU1) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	4.87	5.57	16.84	24.00	-7.16
High	6585	5.56	6.25	17.53	24.00	-6.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS HIGH MRU 7) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	4.89	5.08	16.60	24.00	-7.40
High	6585	5.23	5.75	17.11	24.00	-6.89

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS HIGH MRU12) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.91	6.56	17.86	24.00	-6.14
High	6585	5.53	6.25	17.52	24.00	-6.48

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS LOW MRU5) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.26	5.26	16.87	24.00	-7.13
High	6585	5.72	6.18	17.57	24.00	-6.43

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS HIGH MRU11) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.91	6.54	17.85	24.00	-6.15
High	6585	5.64	6.04	17.45	24.00	-6.55

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.45	5.40	17.04	24.00	-6.96
High	6585	5.45	5.99	17.34	24.00	-6.66

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.84	6.47	17.78	24.00	-6.22
High	6585	5.54	5.99	17.38	24.00	-6.62

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS LOW MRU3) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.29	5.32	16.92	24.00	-7.08
High	6585	5.57	6.07	17.44	24.00	-6.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS HIGH MRU9) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.83	6.45	17.76	24.00	-6.24
High	6585	5.60	6.17	17.50	24.00	-6.50

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2 LOW MRU4)
– LOW POWER INDOOR**

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.16	5.19	16.79	24.00	-7.21
High	6585	5.55	5.98	17.38	24.00	-6.62

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2 HIGH
MRU10) – LOW POWER INDOOR**

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.83	6.50	17.79	24.00	-6.21
High	6585	5.78	6.32	17.67	24.00	-6.33

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.36	5.19	16.89	24.00	-7.11
High	6585	5.41	5.95	17.30	24.00	-6.70

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.31	5.24	16.89	24.00	-7.11
High	6585	5.20	5.19	16.81	24.00	-7.19

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	4.94	4.85	16.51	24.00	-7.49
High	6585	5.33	5.89	17.23	24.00	-6.77

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	4.79	4.74	16.38	24.00	-7.62
High	6585	5.36	5.94	17.27	24.00	-6.73

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.27	5.25	16.87	24.00	-7.13
High	6585	5.43	6.04	17.36	24.00	-6.64

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.37	5.38	16.99	24.00	-7.01
High	6585	5.39	5.79	17.20	24.00	-6.80

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.45	5.51	17.09	24.00	-6.91
High	6585	5.61	6.24	17.55	24.00	-6.45

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.23	5.37	16.91	24.00	-7.09
High	6585	5.40	5.94	17.29	24.00	-6.71

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.11	5.21	16.77	24.00	-7.23
High	6585	5.26	5.77	17.13	24.00	-6.87

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.27	5.29	16.89	24.00	-7.11
High	6585	5.29	5.87	17.20	24.00	-6.80

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.48	5.47	17.09	24.00	-6.91
High	6585	5.34	5.96	17.27	24.00	-6.73

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	5.66	6.31	17.61	24.00	-6.39
High	6585	5.39	5.89	17.26	24.00	-6.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6425	8.60	11.61	24.00	-1.00
High	6585	8.60	11.61	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6425	7.51	8.58	19.69	24.00	-4.31
High	6585	7.44	8.19	19.44	24.00	-4.56

9.1.37. 802.11a MODE 2TX IN THE UNII-7 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	30.00	17.00
Mid	6715	5.20	8.21	30.00	17.00
High	6855	5.20	8.21	30.00	17.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	16.83	17.03	25.14	30.00	-4.86
Mid	6715	16.33	16.30	24.53	30.00	-5.47
High	6855	13.70	13.84	21.98	30.00	-8.02

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	4.92	5.53	16.46	17.00	-0.54
Mid	6715	4.54	4.50	15.74	17.00	-1.26
High	6855	4.63	4.36	15.71	17.00	-1.29

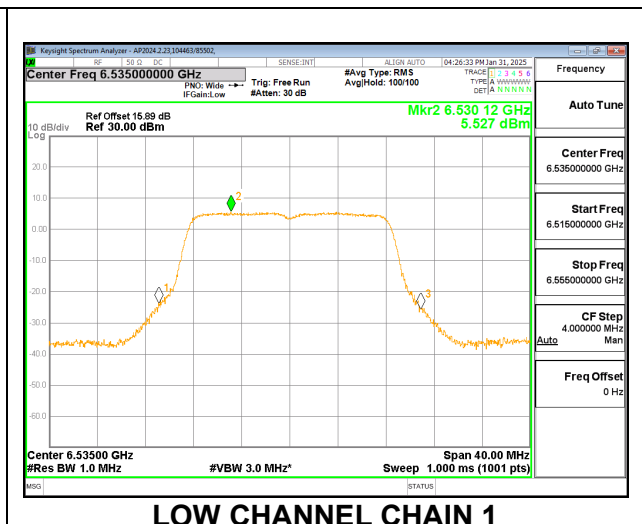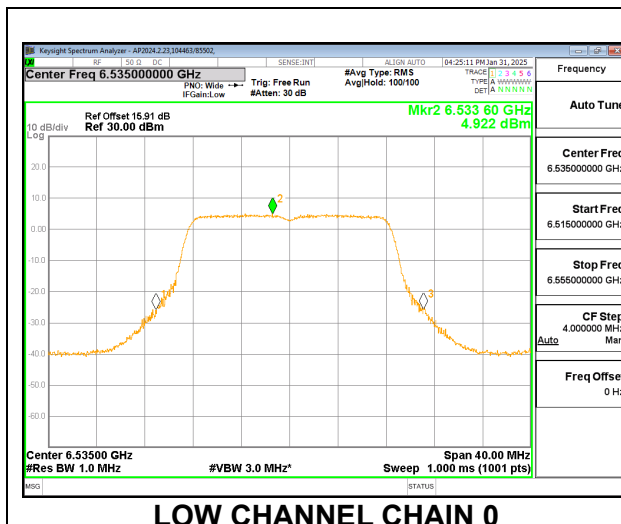

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	24.00	-1.00
Mid	6715	5.20	8.21	24.00	-1.00
High	6855	5.20	8.21	24.00	-1.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-0.83	1.89	8.95	24.00	-15.05
Mid	6715	-1.14	1.88	8.84	24.00	-15.16
High	6855	-1.35	1.64	8.61	24.00	-15.39

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	-13.27	-12.60	-1.70	-1.00	-0.70
Mid	6715	-12.75	-12.88	-1.59	-1.00	-0.59
High	6855	-12.68	-12.97	-1.60	-1.00	-0.60

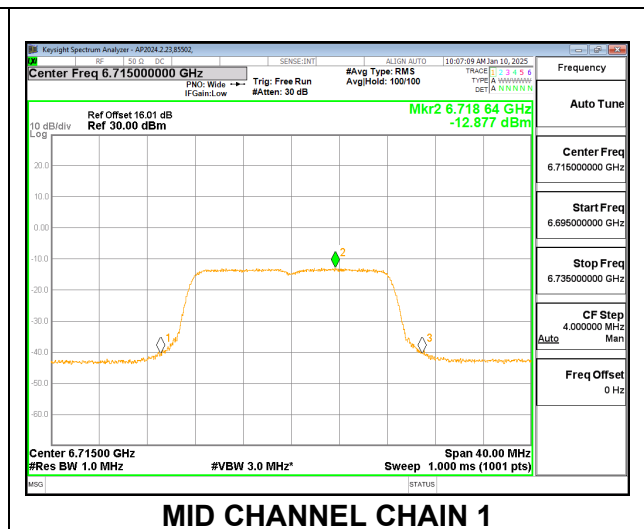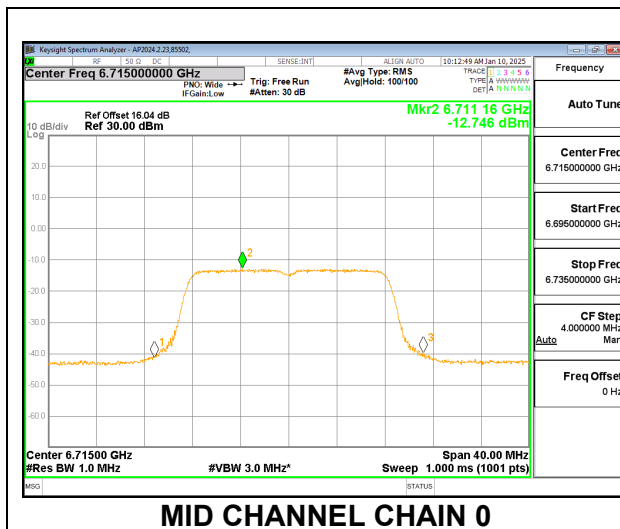

9.1.38. 802.11be EHT20 MODE 2TX IN THE UNII-7 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits


Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	30.00	17.00
Mid	6715	5.20	8.21	30.00	17.00
High	6855	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	7.66	8.26	16.18	30.00	-13.82
Mid	6715	8.35	8.60	16.69	30.00	-13.31
High	6855	5.31	5.41	13.57	30.00	-16.43

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	4.69	5.32	16.23	17.00	-0.77
Mid	6715	4.49	4.76	15.84	17.00	-1.16
High	6855	5.21	5.10	16.37	17.00	-0.63

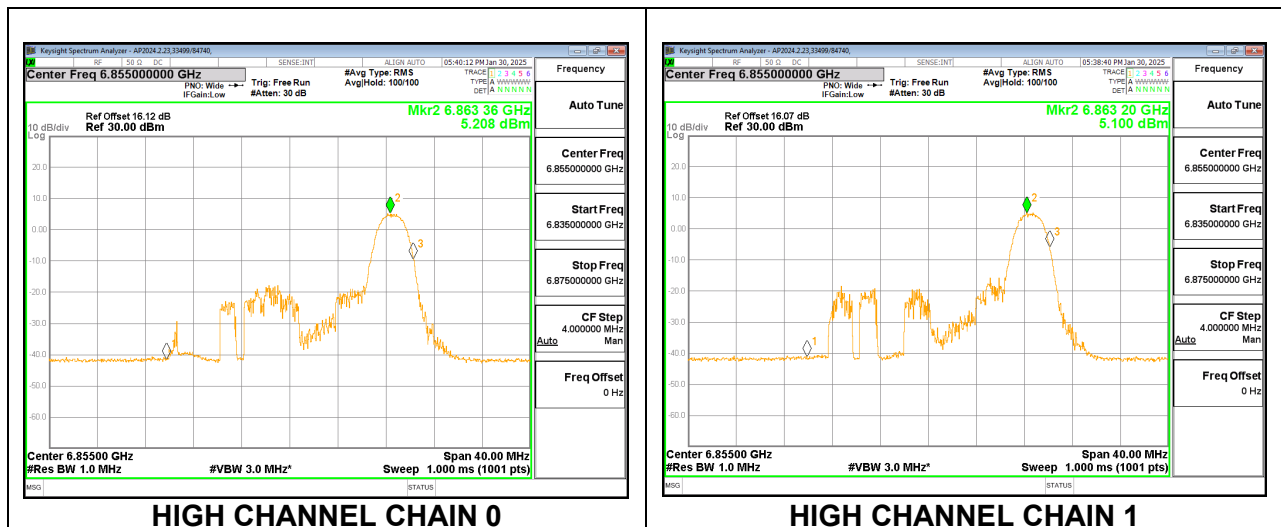

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	24.00	-1.00
Mid	6715	5.20	8.21	24.00	-1.00
High	6855	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-9.73	-8.78	-1.02	24.00	-25.02
Mid	6715	-9.70	-9.54	-1.41	24.00	-25.41
High	6855	-9.51	-9.41	-1.25	24.00	-25.25

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	30.00	17.00
Mid	6715	5.20	8.21	30.00	17.00
High	6855	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	10.89	11.50	19.42	30.00	-10.58
Mid	6715	11.37	11.43	19.61	30.00	-10.39
High	6855	8.13	8.47	16.51	30.00	-13.49

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	24.00	-1.00
Mid	6715	5.20	8.21	24.00	-1.00
High	6855	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-6.75	-5.91	1.90	24.00	-22.10
Mid	6715	-6.55	-6.26	1.81	24.00	-22.19
High	6855	-6.64	-6.49	1.65	24.00	-22.35

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	30.00	17.00
Mid	6715	5.20	8.21	30.00	17.00
High	6855	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	11.16	11.93	19.77	30.00	-10.23
Mid	6715	11.34	11.42	19.59	30.00	-10.41
High	6855	8.59	8.54	16.78	30.00	-13.22

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	24.00	-1.00
Mid	6715	5.20	8.21	24.00	-1.00
High	6855	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-6.84	-6.03	1.79	24.00	-22.21
Mid	6715	-6.55	-6.15	1.86	24.00	-22.14
High	6855	-6.82	-6.57	1.52	24.00	-22.48

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	30.00	17.00
Mid	6715	5.20	8.21	30.00	17.00
High	6855	5.20	8.21	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	13.53	14.37	22.18	30.00	-7.82
Mid	6715	13.73	13.83	21.99	30.00	-8.01
High	6855	11.75	11.64	19.91	30.00	-10.09

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	4.67	5.59	16.37	17.00	-0.63
Mid	6715	4.62	5.45	16.28	17.00	-0.72
High	6855	5.10	4.95	16.25	17.00	-0.75

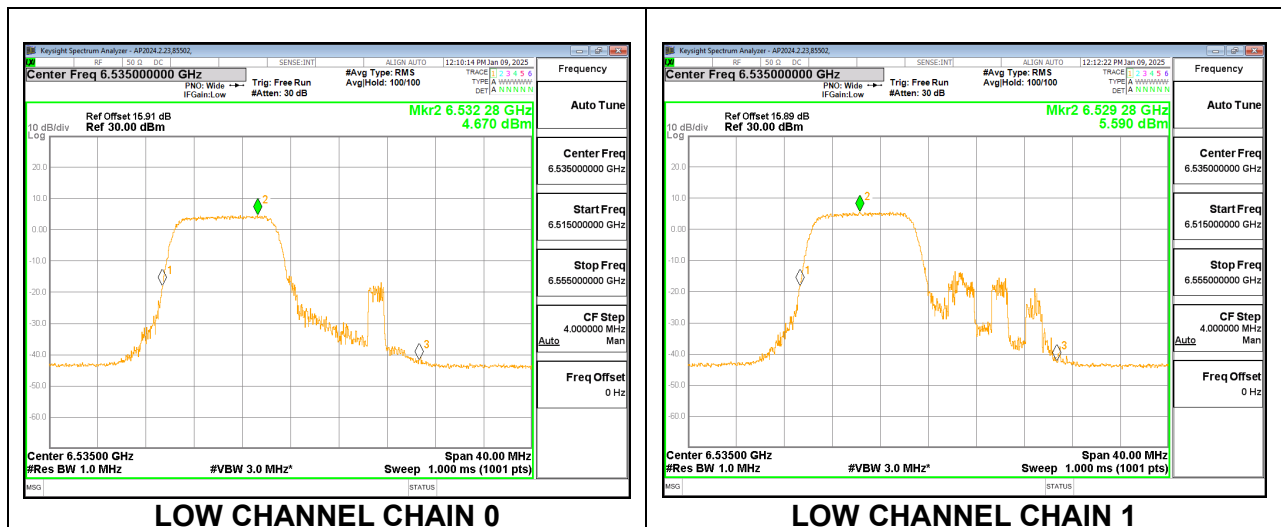

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	24.00	-1.00
Mid	6715	5.20	8.21	24.00	-1.00
High	6855	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-4.18	-3.40	4.44	24.00	-19.56
Mid	6715	-3.99	-3.75	4.34	24.00	-19.66
High	6855	-4.25	-4.12	4.03	24.00	-19.97

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	30.00	17.00
Mid	6715	5.20	8.21	30.00	17.00
High	6855	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	13.54	14.36	22.18	30.00	-7.82
Mid	6715	11.68	13.93	21.16	30.00	-8.84
High	6855	11.72	11.75	19.95	30.00	-10.05

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	24.00	-1.00
Mid	6715	5.20	8.21	24.00	-1.00
High	6855	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-4.15	-3.36	4.47	24.00	-19.53
Mid	6715	-3.96	-3.72	4.37	24.00	-19.63
High	6855	-4.26	-4.07	4.05	24.00	-19.95

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	30.00	17.00
Mid	6715	5.20	8.21	30.00	17.00
High	6855	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	16.60	17.09	25.06	30.00	-4.94
Mid	6715	16.22	16.29	24.47	30.00	-5.53
High	6855	13.64	13.76	21.91	30.00	-8.09

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	5.20	8.21	24.00	-1.00
Mid	6715	5.20	8.21	24.00	-1.00
High	6855	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-1.74	-1.25	6.72	24.00	-17.28
Mid	6715	-1.47	-1.57	6.69	24.00	-17.31
High	6855	-1.72	-1.76	6.47	24.00	-17.53

9.1.39. 802.11be EHT40 MODE 2TX IN THE UNII-7 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6565	5.20	8.21	30.00	17.00
Mid	6685	5.20	8.21	30.00	17.00
High	6845	5.20	8.21	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas. Power (dBm)	Chain 1 Meas. Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6565	17.08	17.82	25.68	30.00	-4.32
Mid	6685	16.77	17.29	25.25	30.00	-4.75
High	6845	16.93	17.09	25.22	30.00	-4.78

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas. PSD (dBm)	Chain 1 Meas. PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6565	1.94	2.57	13.49	17.00	-3.51
Mid	6685	1.71	2.57	13.38	17.00	-3.62
High	6845	1.52	1.60	12.78	17.00	-4.22

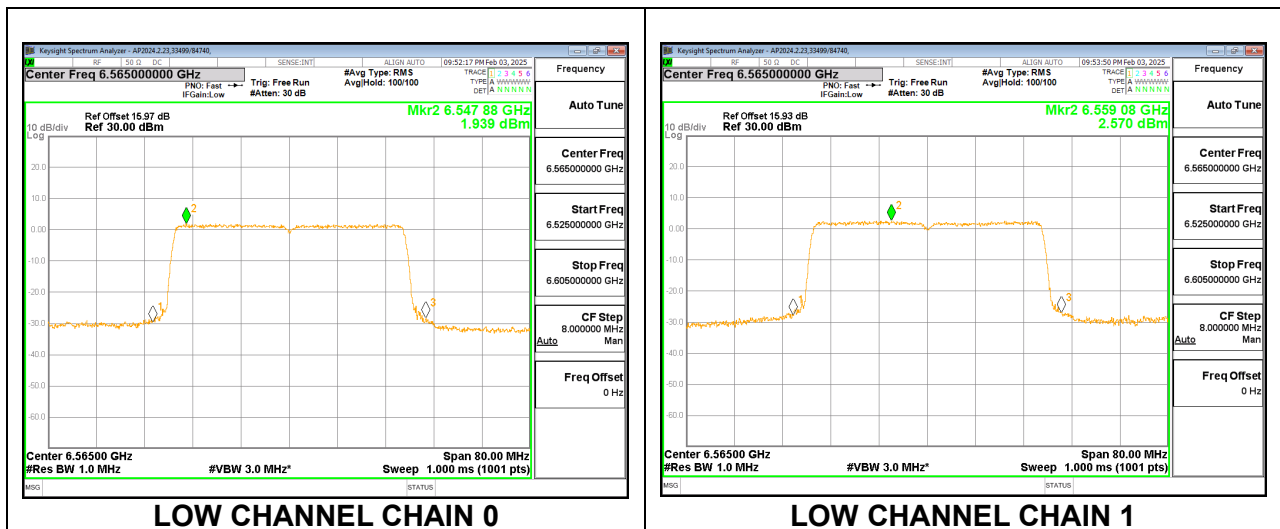

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6565	5.20	8.21	24.00	-1.00
Mid	6685	5.20	8.21	24.00	-1.00
High	6845	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6565	1.83	2.52	10.40	24.00	-13.60
Mid	6685	1.94	2.41	10.39	24.00	-13.61
High	6845	2.12	1.93	10.24	24.00	-13.76

9.1.40. 802.11be EHT80 MODE 2TX IN THE UNII-7 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	5.20	8.21	30.00	17.00
Mid	6705	5.20	8.21	30.00	17.00
High	6785	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	16.84	17.52	25.40	30.00	-4.60
Mid	6705	16.84	16.98	25.12	30.00	-4.88
High	6785	16.85	16.98	25.13	30.00	-4.87

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	5.20	8.21	24.00	-1.00
Mid	6705	5.20	8.21	24.00	-1.00
High	6785	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	1.58	2.37	10.20	24.00	-13.80
Mid	6705	2.38	2.45	10.63	24.00	-13.37
High	6785	2.39	2.05	10.43	24.00	-13.57

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	5.20	8.21	30.00	17.00
Mid	6705	5.20	8.21	30.00	17.00
High	6785	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	16.79	17.46	25.35	30.00	-4.65
Mid	6705	16.96	17.22	25.30	30.00	-4.70
High	6785	16.90	17.06	25.19	30.00	-4.81

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	5.20	8.21	24.00	-1.00
Mid	6705	5.20	8.21	24.00	-1.00
High	6785	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	1.89	2.59	10.46	24.00	-13.54
Mid	6705	2.47	2.46	10.68	24.00	-13.32
High	6785	2.31	2.14	10.44	24.00	-13.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	5.20	8.21	30.00	17.00
Mid	6705	5.20	8.21	30.00	17.00
High	6785	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	16.94	17.52	25.45	30.00	-4.55
Mid	6705	16.76	16.99	25.09	30.00	-4.91
High	6785	16.78	16.92	25.06	30.00	-4.94

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	5.20	8.21	24.00	-1.00
Mid	6705	5.20	8.21	24.00	-1.00
High	6785	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	1.66	2.34	10.22	24.00	-13.78
Mid	6705	2.44	2.47	10.67	24.00	-13.33
High	6785	2.42	2.17	10.51	24.00	-13.49

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	5.20	8.21	30.00	17.00
Mid	6705	5.20	8.21	30.00	17.00
High	6785	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	16.90	17.58	25.46	30.00	-4.54
Mid	6705	16.93	17.07	25.21	30.00	-4.79
High	6785	16.86	17.04	25.16	30.00	-4.84

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	5.20	8.21	24.00	-1.00
Mid	6705	5.20	8.21	24.00	-1.00
High	6785	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	1.66	2.49	10.31	24.00	-13.69
Mid	6705	2.44	2.43	10.65	24.00	-13.35
High	6785	2.36	2.09	10.44	24.00	-13.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	5.20	8.21	30.00	17.00
Mid	6705	5.20	8.21	30.00	17.00
High	6785	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	15.13	15.80	23.69	30.00	-6.31
Mid	6705	17.34	17.50	25.63	30.00	-4.37
High	6785	17.25	17.34	25.51	30.00	-4.49

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	5.20	8.21	24.00	-1.00
Mid	6705	5.20	8.21	24.00	-1.00
High	6785	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	5.97	6.52	14.46	24.00	-9.54
Mid	6705	5.69	5.88	14.00	24.00	-10.00
High	6785	5.63	5.86	13.96	24.00	-10.04

9.1.41. 802.11be EHT160 MODE 2TX IN THE UNII-7 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.12	15.81	23.69	30.00	-6.31

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.84	6.51	14.40	24.00	-9.60

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.13	15.86	23.72	30.00	-6.28

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.83	6.36	14.31	24.00	-9.69

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.29	15.90	23.82	30.00	-6.18

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.83	6.55	14.42	24.00	-9.58

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.16	15.90	23.76	30.00	-6.24

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.83	6.43	14.35	24.00	-9.65

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.61	15.25	23.15	30.00	-6.85

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.59	6.03	14.03	24.00	-9.97

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.74	15.34	23.26	30.00	-6.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.63	6.07	14.07	24.00	-9.93

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.67	15.30	23.21	30.00	-6.79

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.61	5.93	13.98	24.00	-10.02

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS LOW) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.57	15.20	23.11	30.00	-6.89

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.66	6.04	14.06	24.00	-9.94

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS HIGH) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.68	15.24	23.18	30.00	-6.82

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.58	6.05	14.03	24.00	-9.97

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.67	15.33	23.22	30.00	-6.78

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.69	6.12	14.12	24.00	-9.88

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.80	15.21	23.22	30.00	-6.78

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.65	6.10	14.09	24.00	-9.91

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.73	15.34	23.26	30.00	-6.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.57	6.00	14.00	24.00	-10.00

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	16.23	16.77	24.72	30.00	-5.28

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	8.40	8.98	16.91	24.00	-7.09

9.1.42. 802.11a MODE 2TX IN THE UNII-7 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	30.00	17.00
Mid	6715	7.30	10.31	30.00	17.00
High	6855	7.30	10.31	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	14.05	15.02	24.87	30.00	-5.13
Mid	6715	14.73	14.73	25.04	30.00	-4.96
High	6855	15.17	15.24	25.52	30.00	-4.48

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	2.54	3.66	16.46	17.00	-0.54
Mid	6715	2.35	3.39	16.22	17.00	-0.78
High	6855	2.73	3.22	16.30	17.00	-0.70

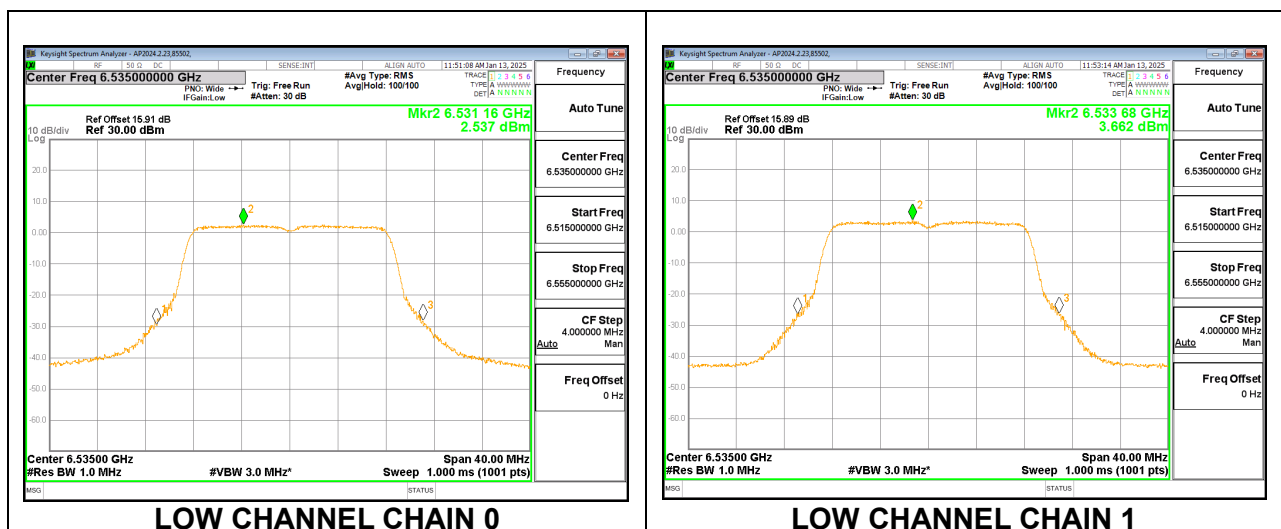

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	24.00	-1.00
Mid	6715	7.30	10.31	24.00	-1.00
High	6855	7.30	10.31	24.00	-1.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-3.45	-2.65	7.28	24.00	-16.72
Mid	6715	-3.08	-3.08	7.23	24.00	-16.77
High	6855	-3.39	-3.33	6.95	24.00	-17.05

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	-15.50	-14.52	-1.66	-1.00	-0.66
Mid	6715	-15.03	-15.03	-1.71	-1.00	-0.71
High	6855	-15.44	-15.66	-2.23	-1.00	-1.23

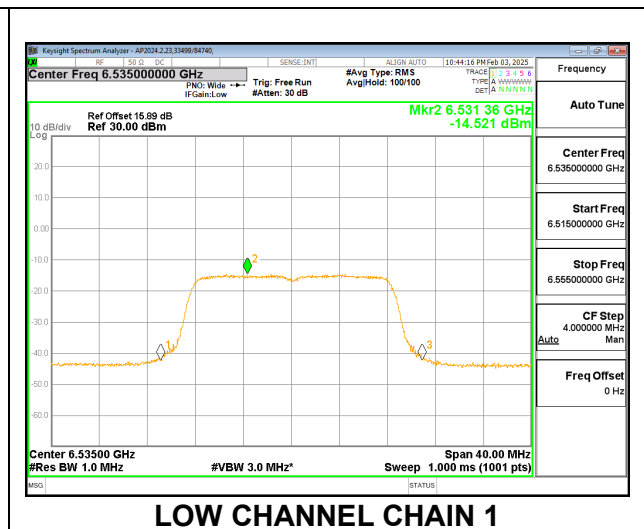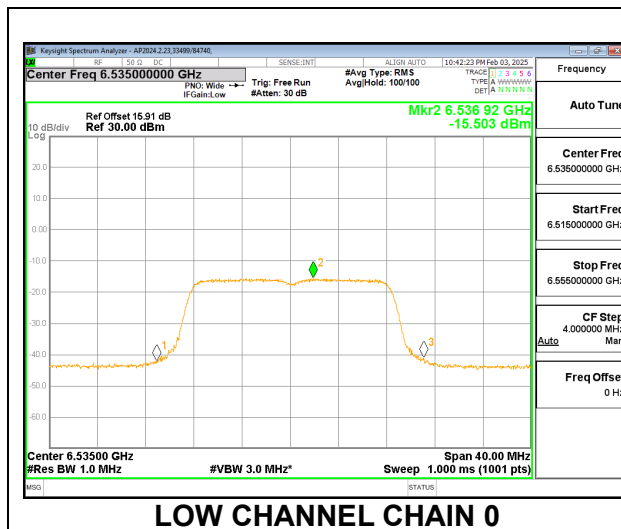

9.1.43. 802.11be EHT20 MODE 2TX IN THE UNII-7 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	30.00	17.00
Mid	6715	7.30	10.31	30.00	17.00
High	6855	7.30	10.31	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	5.78	5.19	15.81	30.00	-14.19
Mid	6715	5.28	5.58	15.74	30.00	-14.26

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	2.56	3.40	16.32	17.00	-0.68
Mid	6715	1.66	1.54	14.92	17.00	-2.08
High	6855	2.25	2.22	15.55	17.00	-1.45

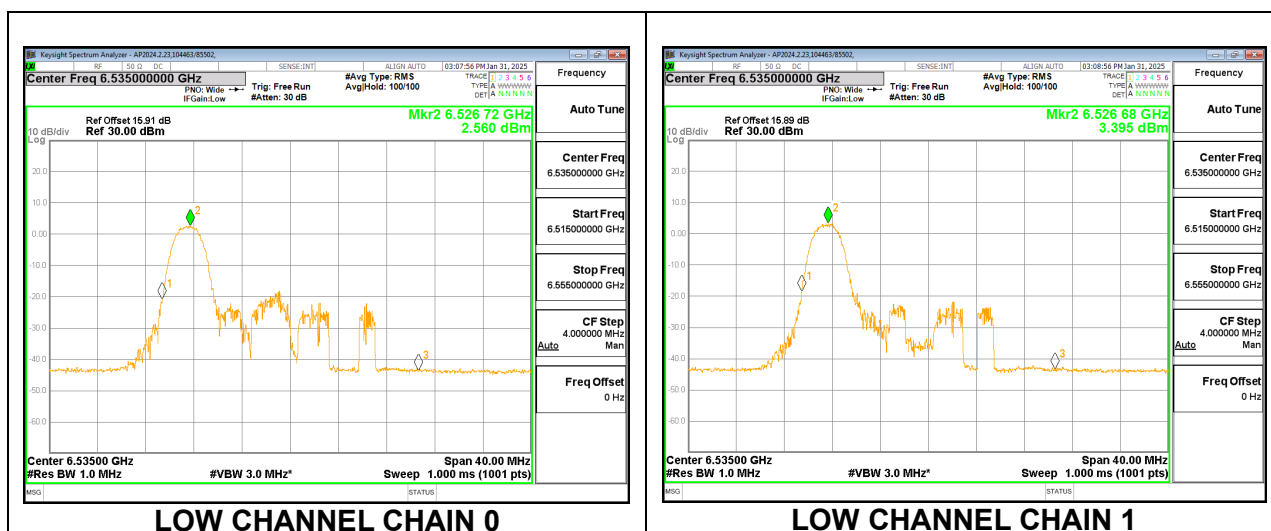

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	24.00	-1.00
Mid	6715	7.30	10.31	24.00	-1.00
High	6855	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-12.34	-11.40	-1.53	24.00	-25.53
Mid	6715	-11.24	-11.12	-0.87	24.00	-24.87
High	6855	-12.11	-12.01	-1.75	24.00	-25.75

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	-15.52	-14.62	-1.73	-1.00	-0.73
Mid	6715	-15.55	-15.25	-2.07	-1.00	-1.07
High	6855	-15.08	-14.75	-1.59	-1.00	-0.59

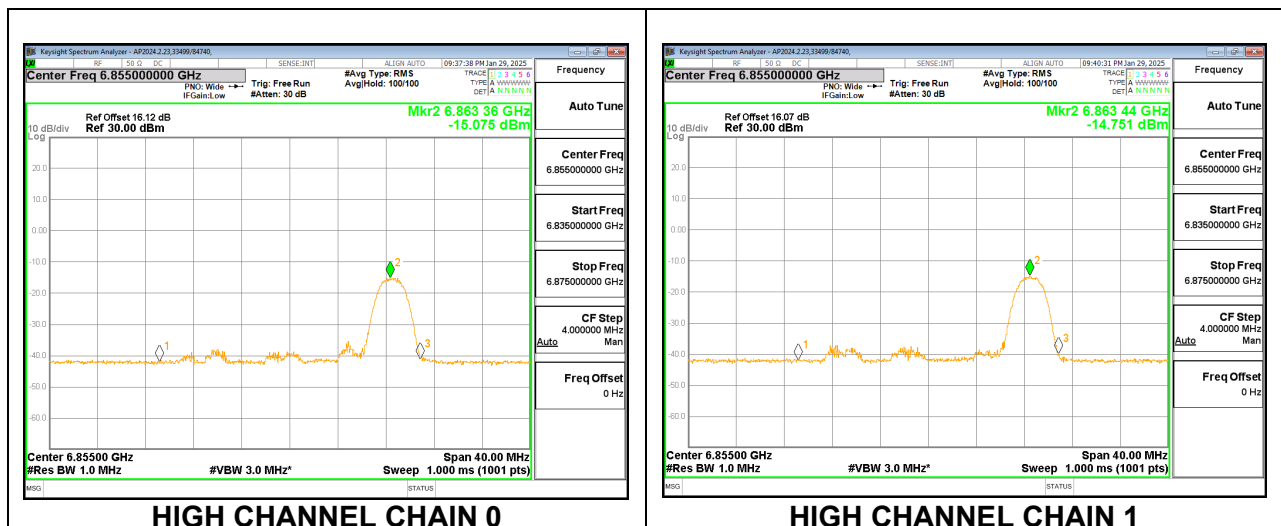

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	30.00	17.00
Mid	6715	7.30	10.31	30.00	17.00
High	6855	7.30	10.31	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	8.41	8.81	18.92	30.00	-11.08
Mid	6715	8.59	8.93	19.07	30.00	-10.93
High	6855	8.78	8.96	19.18	30.00	-10.82

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	2.60	2.81	16.03	17.00	-0.97
Mid	6715	2.78	3.05	16.23	17.00	-0.77
High	6855	3.09	2.95	16.34	17.00	-0.66

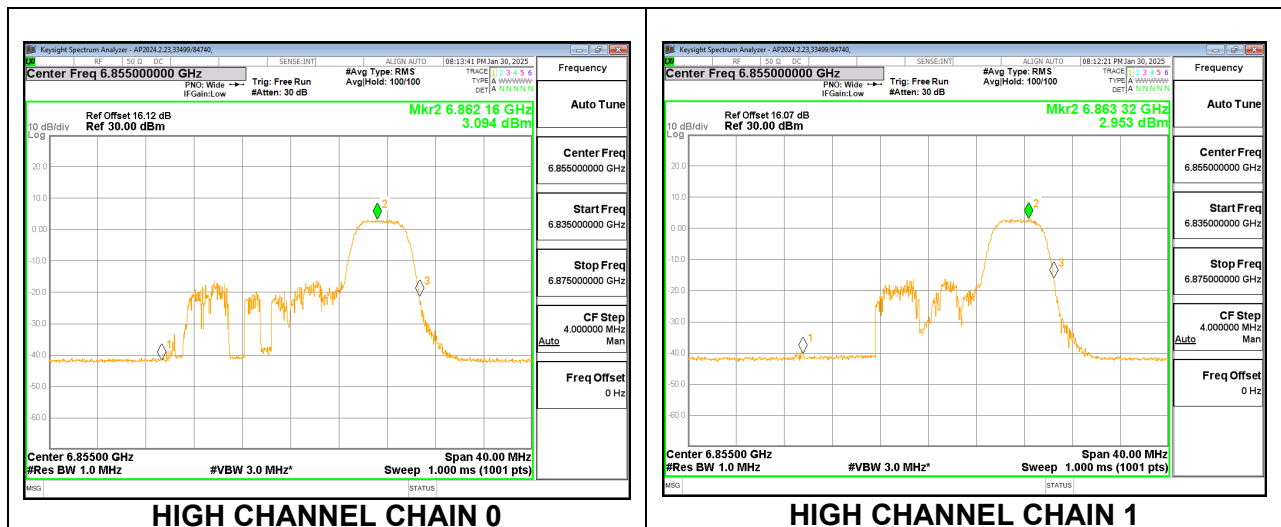

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	24.00	-1.00
Mid	6715	7.30	10.31	24.00	-1.00
High	6855	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-9.80	-8.98	0.94	24.00	-23.06
Mid	6715	-9.64	-9.43	0.78	24.00	-23.22
High	6855	-9.72	-9.54	0.68	24.00	-23.32

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	-16.36	-13.82	-1.59	-1.00	-0.59
Mid	6715	-15.68	-14.38	-1.66	-1.00	-0.66
High	6855	-15.65	-14.14	-1.51	-1.00	-0.51

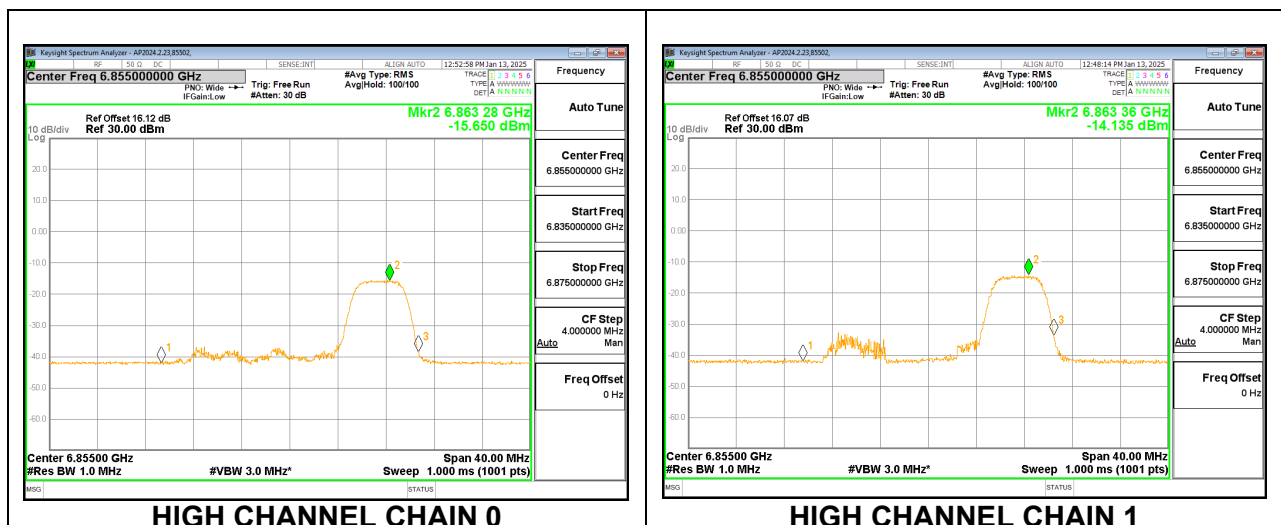

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	30.00	17.00
Mid	6715	7.30	10.31	30.00	17.00
High	6855	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	8.68	9.07	19.19	30.00	-10.81
Mid	6715	5.76	6.01	16.20	30.00	-13.80
High	6855	11.07	11.18	21.44	30.00	-8.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	24.00	-1.00
Mid	6715	7.30	10.31	24.00	-1.00
High	6855	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-9.95	-8.99	0.87	24.00	-23.13
Mid	6715	-9.57	-9.27	0.89	24.00	-23.11
High	6855	-9.86	-9.70	0.53	24.00	-23.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	30.00	17.00
Mid	6715	7.30	10.31	30.00	17.00
High	6855	7.30	10.31	30.00	17.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	11.52	12.22	22.19	30.00	-7.81
Mid	6715	11.71	11.93	22.13	30.00	-7.87
High	6855	11.07	11.18	21.44	30.00	-8.56

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	2.72	3.16	16.26	17.00	-0.74
Mid	6715	3.10	2.45	16.11	17.00	-0.89
High	6855	2.92	2.25	15.92	17.00	-1.08

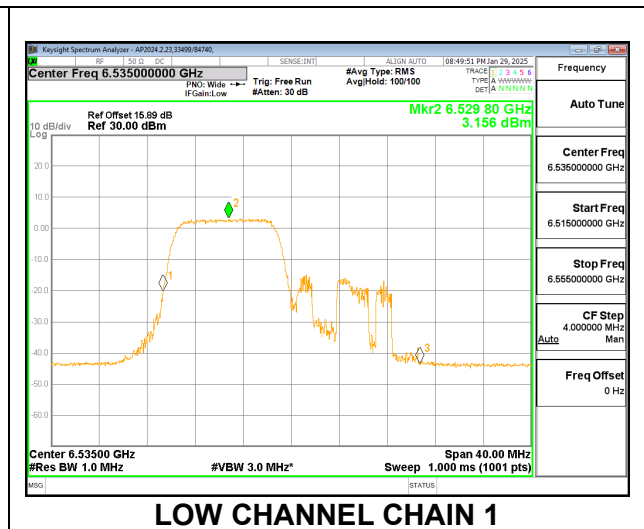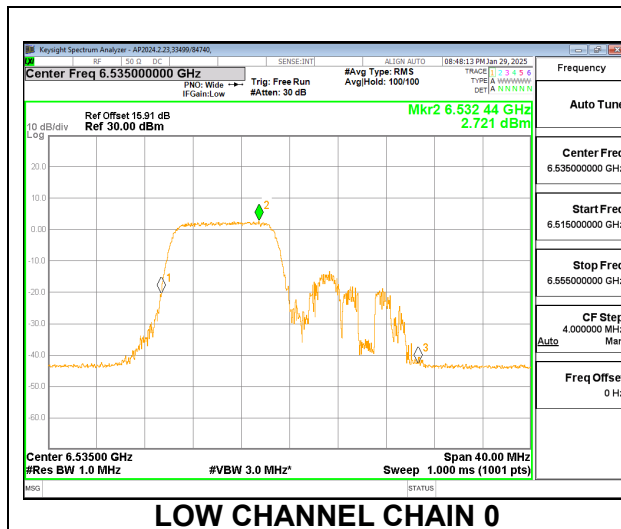

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	24.00	-1.00
Mid	6715	7.30	10.31	24.00	-1.00
High	6855	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-6.87	-5.96	3.92	24.00	-20.08
Mid	6715	-5.97	-5.71	4.47	24.00	-19.53
High	6855	-6.22	-6.19	4.11	24.00	-19.89

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	-15.86	-14.64	-1.89	-1.00	-0.89
Mid	6715	-15.14	-15.16	-1.83	-1.00	-0.83
High	6855	-15.21	-15.41	-1.99	-1.00	-0.99

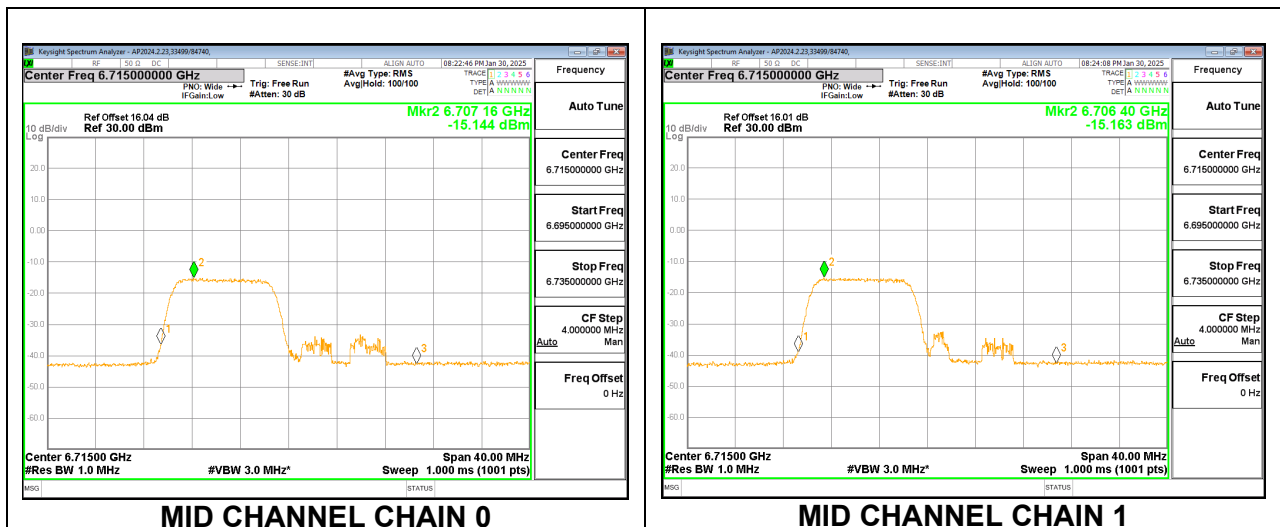

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	30.00	17.00
Mid	6715	7.30	10.31	30.00	17.00
High	6855	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	11.57	12.16	22.19	30.00	-7.81
Mid	6715	11.73	11.93	22.14	30.00	-7.86
High	6855	11.08	11.17	21.44	30.00	-8.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	24.00	-1.00
Mid	6715	7.30	10.31	24.00	-1.00
High	6855	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-6.87	-5.96	3.92	24.00	-20.08
Mid	6715	-5.97	-5.71	4.47	24.00	-19.53
High	6855	-6.22	-6.19	4.11	24.00	-19.89

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	30.00	17.00
Mid	6715	7.30	10.31	30.00	17.00
High	6855	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	14.49	15.09	25.11	30.00	-4.89
Mid	6715	14.74	14.65	25.01	30.00	-4.99
High	6855	13.66	13.75	24.02	30.00	-5.98

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	7.30	10.31	24.00	-1.00
Mid	6715	7.30	10.31	24.00	-1.00
High	6855	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-3.88	-3.06	6.86	24.00	-17.14
Mid	6715	-3.45	-3.44	6.87	24.00	-17.13
High	6855	-3.77	-3.76	6.55	24.00	-17.45

9.1.44. 802.11be EHT40 MODE 2TX IN THE UNII-7 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6565	7.30	10.31	30.00	17.00
Mid	6685	7.30	10.31	30.00	17.00
High	6845	7.30	10.31	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas. Power (dBm)	Chain 1 Meas. Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6565	17.08	17.82	27.78	30.00	-2.22
Mid	6685	16.77	17.29	27.35	30.00	-2.65
High	6845	16.93	17.09	27.32	30.00	-2.68

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas. PSD (dBm)	Chain 1 Meas. PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6565	1.87	2.66	15.60	17.00	-1.40
Mid	6685	1.66	2.68	15.52	17.00	-1.48
High	6845	1.30	1.56	14.75	17.00	-2.25

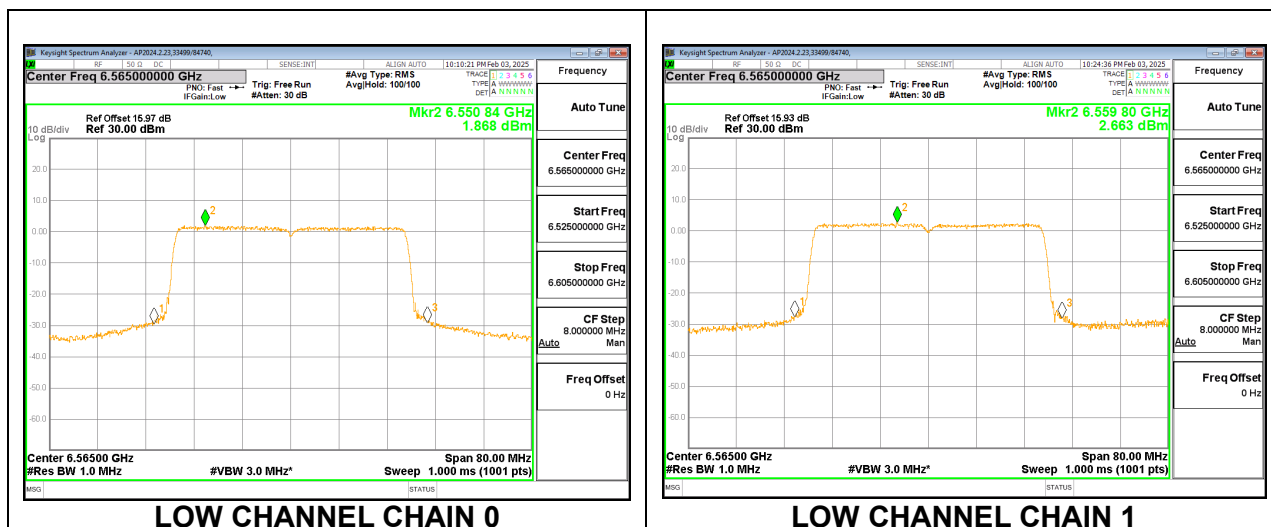

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits


Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6565	7.30	10.31	24.00	-1.00
Mid	6685	7.30	10.31	24.00	-1.00
High	6845	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6565	0.08	1.10	10.93	24.00	-13.07
Mid	6685	0.15	1.01	10.91	24.00	-13.09
High	6845	0.93	0.97	11.26	24.00	-12.74

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6565	-15.49	-14.71	-1.76	-1.00	-0.76
Mid	6685	-15.03	-14.69	-1.54	-1.00	-0.54
High	6845	-15.02	-14.99	-1.69	-1.00	-0.69

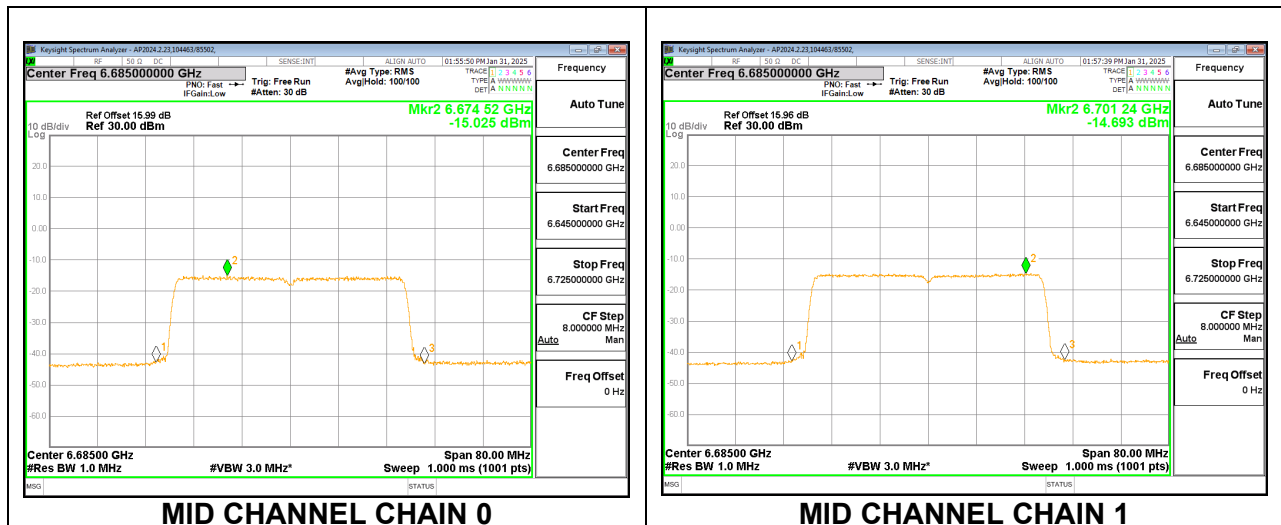

9.1.45. 802.11be EHT80 MODE 2TX IN THE UNII-7 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	7.30	10.31	30.00	17.00
Mid	6705	7.30	10.31	30.00	17.00
High	6785	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	16.84	17.52	27.50	30.00	-2.50
Mid	6705	16.84	16.98	27.22	30.00	-2.78
High	6785	16.85	16.98	27.23	30.00	-2.77

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	7.30	10.31	24.00	-1.00
Mid	6705	7.30	10.31	24.00	-1.00
High	6785	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	-0.11	0.81	10.68	24.00	-13.32
Mid	6705	0.79	0.90	11.16	24.00	-12.84
High	6785	0.68	0.52	10.91	24.00	-13.09

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	7.30	10.31	30.00	17.00
Mid	6705	7.30	10.31	30.00	17.00
High	6785	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	16.79	17.46	27.45	30.00	-2.55
Mid	6705	16.96	17.22	27.40	30.00	-2.60
High	6785	16.90	17.06	27.29	30.00	-2.71

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	7.30	10.31	24.00	-1.00
Mid	6705	7.30	10.31	24.00	-1.00
High	6785	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	-0.07	0.98	10.80	24.00	-13.20
Mid	6705	0.73	1.00	11.18	24.00	-12.82
High	6785	0.60	0.42	10.82	24.00	-13.18

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	7.30	10.31	30.00	17.00
Mid	6705	7.30	10.31	30.00	17.00
High	6785	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	16.94	17.52	27.55	30.00	-2.45
Mid	6705	16.76	16.99	27.19	30.00	-2.81
High	6785	16.78	16.92	27.16	30.00	-2.84

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	7.30	10.31	24.00	-1.00
Mid	6705	7.30	10.31	24.00	-1.00
High	6785	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	-0.57	0.32	10.21	24.00	-13.79
Mid	6705	0.25	0.38	10.63	24.00	-13.37
High	6785	0.04	-0.06	10.30	24.00	-13.70

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	7.30	10.31	30.00	17.00
Mid	6705	7.30	10.31	30.00	17.00
High	6785	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	16.90	17.58	27.56	30.00	-2.44
Mid	6705	16.93	17.07	27.31	30.00	-2.69
High	6785	16.86	17.04	27.26	30.00	-2.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	7.30	10.31	24.00	-1.00
Mid	6705	7.30	10.31	24.00	-1.00
High	6785	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	-0.14	0.81	10.67	24.00	-13.33
Mid	6705	0.66	0.95	11.12	24.00	-12.88
High	6785	0.68	0.52	10.91	24.00	-13.09

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	7.30	10.31	30.00	17.00
Mid	6705	7.30	10.31	30.00	17.00
High	6785	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	15.13	15.80	25.79	30.00	-4.21
Mid	6705	17.34	17.50	27.73	30.00	-2.27
High	6785	17.25	17.34	27.61	30.00	-2.39

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	7.30	10.31	24.00	-1.00
Mid	6705	7.30	10.31	24.00	-1.00
High	6785	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	3.92	5.15	14.89	24.00	-9.11
Mid	6705	4.16	4.37	14.58	24.00	-9.42
High	6785	4.00	4.22	14.42	24.00	-9.58

9.1.46. 802.11be EHT160 MODE 2TX IN THE UNII-7 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.12	15.81	25.79	30.00	-4.21

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	4.03	5.03	14.87	24.00	-9.13

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.13	15.86	25.82	30.00	-4.18

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	3.92	5.18	14.91	24.00	-9.09

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.29	15.90	25.92	30.00	-4.08

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	4.08	5.11	14.94	24.00	-9.06

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.16	15.90	25.86	30.00	-4.14

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	4.03	5.20	14.96	24.00	-9.04

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.61	15.25	25.25	30.00	-4.75

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	3.47	4.58	14.37	24.00	-9.63

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.74	15.34	25.36	30.00	-4.64

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	3.39	4.39	14.23	24.00	-9.77

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.67	15.33	25.32	30.00	-4.68

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	3.45	4.46	14.29	24.00	-9.71

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS LOW) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.57	15.20	25.21	30.00	-4.79

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	3.62	4.65	14.48	24.00	-9.52

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS HIGH) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.68	15.24	25.28	30.00	-4.72

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	3.37	4.53	14.30	24.00	-9.70

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.67	15.33	25.32	30.00	-4.68

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	3.45	4.46	14.29	24.00	-9.71

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.80	15.21	25.32	30.00	-4.68

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	3.55	4.56	14.39	24.00	-9.61

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.73	15.34	25.36	30.00	-4.64

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	3.49	4.53	14.35	24.00	-9.65

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	16.23	16.77	26.82	30.00	-3.18

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	7.06	7.84	17.78	24.00	-6.22

9.1.47. 802.11a MODE 2TX IN THE UNII-7 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	30.00	17.00
Mid	6715	8.20	11.21	30.00	17.00
High	6855	8.20	11.21	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	14.15	14.62	25.60	30.00	-4.40
Mid	6715	13.76	13.62	24.90	30.00	-5.10
High	6855	13.63	13.65	24.85	30.00	-5.15

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	1.82	2.67	16.48	17.00	-0.52
Mid	6715	1.86	1.96	16.13	17.00	-0.87
High	6855	1.70	1.75	15.94	17.00	-1.06

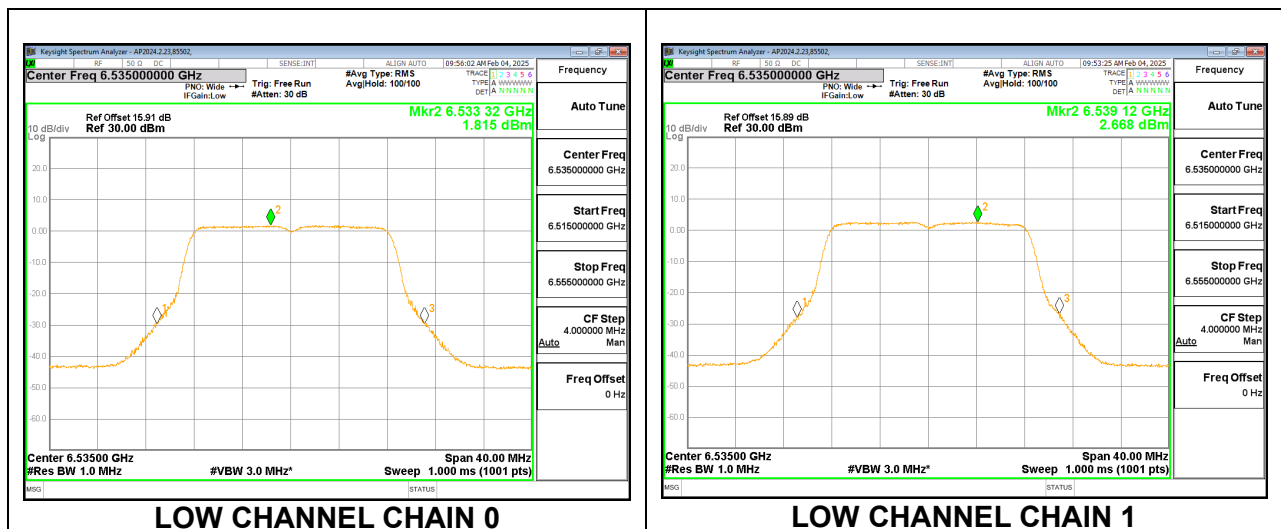

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	24.00	-1.00
Mid	6715	8.20	11.21	24.00	-1.00
High	6855	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-4.98	-4.57	6.44	24.00	-17.56
Mid	6715	-4.66	-4.85	6.46	24.00	-17.54
High	6855	-5.02	-4.99	6.21	24.00	-17.79

9.1.48. 802.11be EHT20 MODE 2TX IN THE UNII-7 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	30.00	17.00
Mid	6715	8.20	11.21	30.00	17.00
High	6855	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	5.82	6.30	17.28	30.00	-12.72
Mid	6715	5.52	5.50	16.72	30.00	-13.28
High	6855	5.37	5.38	16.59	30.00	-13.41

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	24.00	-1.00
Mid	6715	8.20	11.21	24.00	-1.00
High	6855	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-12.77	-12.09	-1.21	24.00	-25.21
Mid	6715	-12.71	-12.76	-1.52	24.00	-25.52
High	6855	-12.67	-11.63	-0.91	24.00	-24.91

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	30.00	17.00
Mid	6715	8.20	11.21	30.00	17.00
High	6855	8.20	11.21	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	7.87	8.52	19.42	30.00	-10.58
Mid	6715	8.23	8.31	19.48	30.00	-10.52
High	6855	8.62	8.86	19.95	30.00	-10.05

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	1.74	2.60	16.41	17.00	-0.59
Mid	6715	1.79	2.66	16.46	17.00	-0.54
High	6855	2.07	2.18	16.34	17.00	-0.66

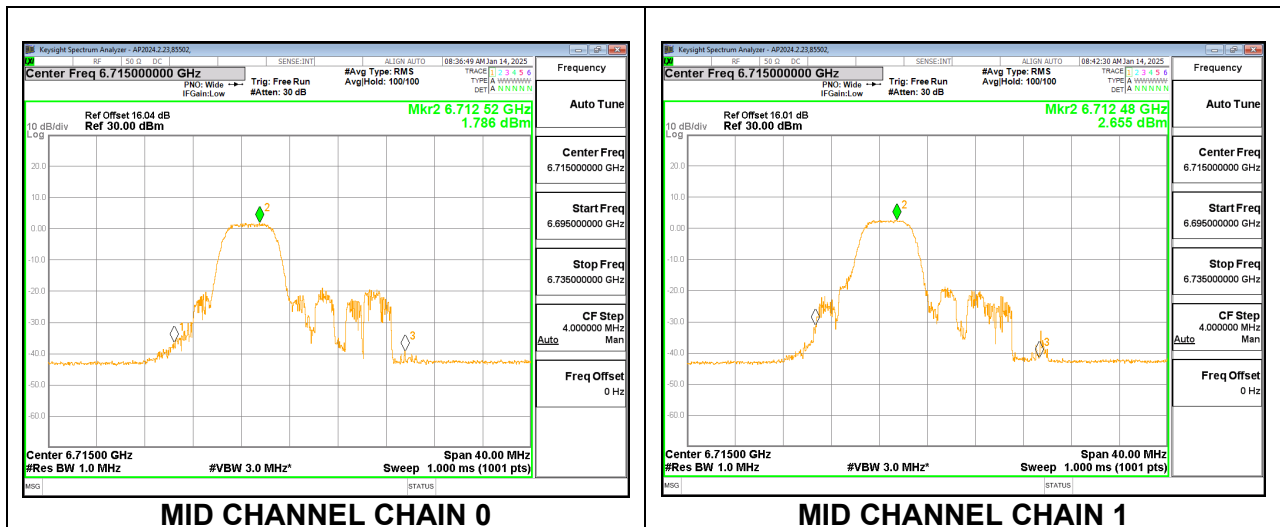

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	24.00	-1.00
Mid	6715	8.20	11.21	24.00	-1.00
High	6855	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-9.76	-9.15	1.77	24.00	-22.23
Mid	6715	-9.60	-9.58	1.62	24.00	-22.38
High	6855	-9.73	-9.80	1.45	24.00	-22.55

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequenc (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	30.00	17.00
Mid	6715	8.20	11.21	30.00	17.00
High	6855	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequenc (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	8.06	8.77	19.64	30.00	-10.36
Mid	6715	8.17	8.25	19.42	30.00	-10.58
High	6855	8.62	8.60	19.82	30.00	-10.18

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	24.00	-1.00
Mid	6715	8.20	11.21	24.00	-1.00
High	6855	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-9.91	-9.20	1.67	24.00	-22.33
Mid	6715	-9.54	-9.40	1.74	24.00	-22.26
High	6855	-9.78	-9.85	1.40	24.00	-22.60

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	30.00	17.00
Mid	6715	8.20	11.21	30.00	17.00
High	6855	8.20	11.21	30.00	17.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	10.64	11.18	22.13	30.00	-7.87
Mid	6715	11.05	11.07	22.27	30.00	-7.73
High	6855	10.56	11.61	22.33	30.00	-7.67

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	1.59	2.52	16.30	17.00	-0.70
Mid	6715	1.91	2.01	16.18	17.00	-0.82
High	6855	1.80	1.65	15.95	17.00	-1.05

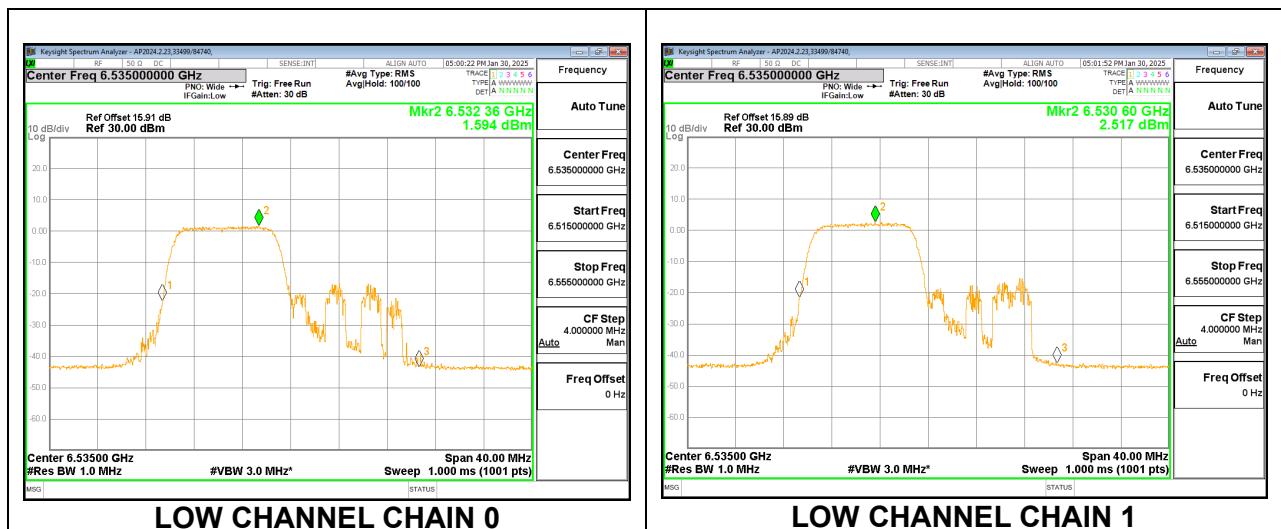

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	24.00	-1.00
Mid	6715	8.20	11.21	24.00	-1.00
High	6855	8.20	11.21	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-7.84	-7.13	3.74	24.00	-20.26
Mid	6715	-7.46	-7.34	3.81	24.00	-20.19
High	6855	-7.74	-7.84	3.42	24.00	-20.58

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6535	-17.29	-16.11	-2.44	-1.00	-1.44
Mid	6715	-16.23	-15.86	-1.82	-1.00	-0.82
High	6855	-15.96	-15.99	-1.75	-1.00	-0.75

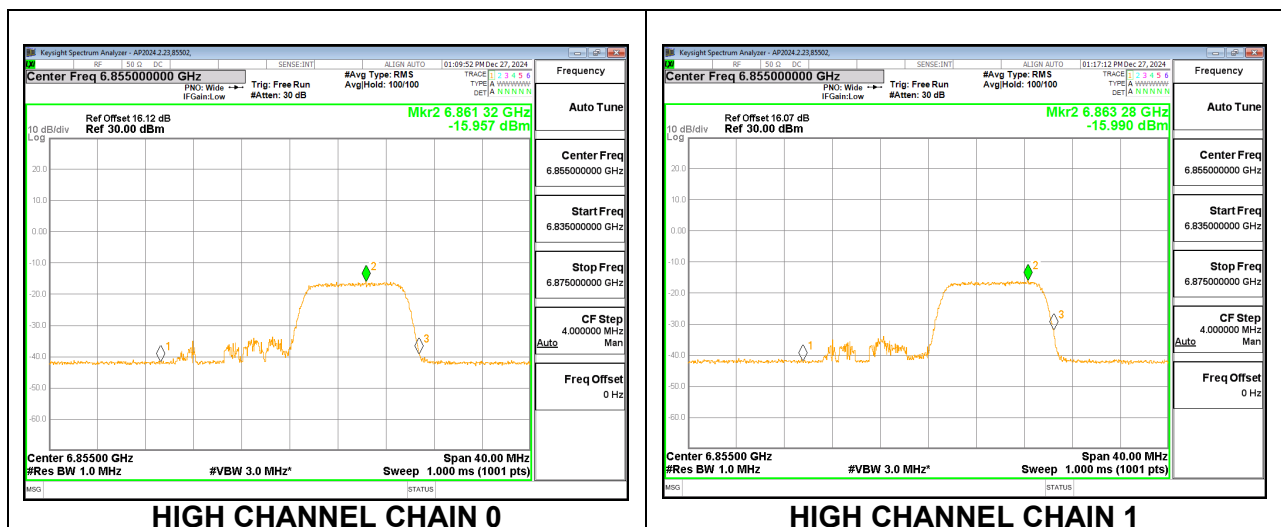

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	30.00	17.00
Mid	6715	8.20	11.21	30.00	17.00
High	6855	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	10.85	11.39	22.34	30.00	-7.66
Mid	6715	10.84	10.91	22.09	30.00	-7.91
High	6855	10.69	10.71	21.91	30.00	-8.09

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	24.00	-1.00
Mid	6715	8.20	11.21	24.00	-1.00
High	6855	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-7.95	-7.12	3.70	24.00	-20.30
Mid	6715	-7.48	-7.49	3.73	24.00	-20.27
High	6855	-7.90	-7.84	3.34	24.00	-20.66

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	30.00	17.00
Mid	6715	8.20	11.21	30.00	17.00
High	6855	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	14.12	14.62	25.59	30.00	-4.41
Mid	6715	13.75	13.55	24.86	30.00	-5.14
High	6855	13.92	14.11	25.23	30.00	-4.77

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6535	8.20	11.21	24.00	-1.00
Mid	6715	8.20	11.21	24.00	-1.00
High	6855	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	-5.26	-4.76	6.21	24.00	-17.79
Mid	6715	-5.07	-5.10	6.13	24.00	-17.87
High	6855	-5.40	-5.20	5.91	24.00	-18.09

9.1.49. 802.11be EHT40 MODE 2TX IN THE UNII-7 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6565	8.20	11.21	30.00	17.00
Mid	6865	8.20	11.21	30.00	17.00
High	6845	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas. Power (dBm)	Chain 1 Meas. Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6565	17.57	18.28	29.15	30.00	-0.85
Mid	6865	17.27	17.72	28.71	30.00	-1.29
High	6845	17.26	17.38	28.53	30.00	-1.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6565	8.20	11.21	24.00	-1.00
Mid	6685	8.20	11.21	24.00	-1.00
High	6845	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6565	-1.26	-0.68	10.25	24.00	-13.75
Mid	6685	-1.20	-0.79	10.22	24.00	-13.78
High	6845	-1.11	-1.36	9.98	24.00	-14.02

9.1.50. 802.11be EHT80 MODE 2TX IN THE UNII-7 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	8.20	11.21	30.00	17.00
Mid	6705	8.20	11.21	30.00	17.00
High	6785	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	17.48	17.79	28.85	30.00	-1.15
Mid	6705	17.42	17.36	28.60	30.00	-1.40
High	6785	17.23	17.34	28.50	30.00	-1.50

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	8.20	11.21	24.00	-1.00
Mid	6705	8.20	11.21	24.00	-1.00
High	6785	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	-1.38	-0.94	10.06	24.00	-13.94
Mid	6705	-0.93	-0.91	10.29	24.00	-13.71
High	6785	-0.93	-1.29	10.10	24.00	-13.90

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	8.20	11.21	30.00	17.00
Mid	6705	8.20	11.21	30.00	17.00
High	6785	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	17.23	17.81	28.74	30.00	-1.26
Mid	6705	17.42	17.55	28.70	30.00	-1.30
High	6785	17.75	17.89	29.03	30.00	-0.97

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	8.20	11.21	24.00	-1.00
Mid	6705	8.20	11.21	24.00	-1.00
High	6785	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	-1.38	-0.87	10.09	24.00	-13.91
Mid	6705	-0.83	-0.89	10.35	24.00	-13.65
High	6785	-0.86	-1.29	10.14	24.00	-13.86

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	8.20	11.21	30.00	17.00
Mid	6705	8.20	11.21	30.00	17.00
High	6785	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	17.38	17.90	28.86	30.00	-1.14
Mid	6705	17.42	17.38	28.61	30.00	-1.39
High	6785	17.17	17.31	28.45	30.00	-1.55

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	8.20	11.21	24.00	-1.00
Mid	6705	8.20	11.21	24.00	-1.00
High	6785	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	-1.36	-1.05	10.01	24.00	-13.99
Mid	6705	-0.76	-0.92	10.37	24.00	-13.63
High	6785	-0.88	-1.23	10.16	24.00	-13.84

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	8.20	11.21	30.00	17.00
Mid	6705	8.20	11.21	30.00	17.00
High	6785	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	17.22	17.85	28.76	30.00	-1.24
Mid	6705	17.36	17.35	28.57	30.00	-1.43
High	6785	17.15	17.32	28.45	30.00	-1.55

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	8.20	11.21	24.00	-1.00
Mid	6705	8.20	11.21	24.00	-1.00
High	6785	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	-1.37	-0.93	10.07	24.00	-13.93
Mid	6705	-0.67	-0.85	10.45	24.00	-13.55
High	6785	-0.69	-1.01	10.36	24.00	-13.64

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6625	8.20	11.21	30.00	17.00
Mid	6705	8.20	11.21	30.00	17.00
High	6785	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	15.13	15.80	26.69	30.00	-3.31
Mid	6705	17.34	17.50	28.63	30.00	-1.37
High	6785	17.25	17.34	28.51	30.00	-1.49

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6625	8.20	11.21	24.00	-1.00
Mid	6705	8.20	11.21	24.00	-1.00
High	6785	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6625	1.56	2.08	13.04	24.00	-10.96
Mid	6705	2.35	2.10	13.44	24.00	-10.56
High	6785	2.23	1.76	13.21	24.00	-10.79

9.1.51. 802.11be EHT160 MODE 2TX IN THE UNII-7 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.12	15.81	26.69	30.00	-3.31

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	2.00	2.37	13.40	24.00	-10.60

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.13	15.86	26.72	30.00	-3.28

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	2.09	2.51	13.52	24.00	-10.48

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.29	15.90	26.82	30.00	-3.18

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	1.58	2.11	13.06	24.00	-10.94

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	15.16	15.90	26.76	30.00	-3.24

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	1.66	2.20	13.15	24.00	-10.85

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.61	15.25	26.15	30.00	-3.85

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	1.47	2.00	12.95	24.00	-11.05

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.74	15.34	26.26	30.00	-3.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	1.35	1.72	12.75	24.00	-11.25

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.67	15.30	26.21	30.00	-3.79

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	1.29	1.69	12.70	24.00	-11.30

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS LOW) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.57	15.20	26.11	30.00	-3.89

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS LOW) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	1.13	1.49	12.52	24.00	-11.48

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS HIGH) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.68	15.24	26.18	30.00	-3.82

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS HIGH) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	1.61	1.94	12.99	24.00	-11.01

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.67	15.33	26.22	30.00	-3.78

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	1.55	1.91	12.94	24.00	-11.06

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.80	15.21	26.22	30.00	-3.78

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	1.27	1.55	12.62	24.00	-11.38

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	14.73	15.34	26.26	30.00	-3.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	1.47	1.73	12.81	24.00	-11.19

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – STANDARD POWER

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	30.00	17.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	16.17	16.69	27.65	30.00	-2.35

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Mid	6665	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Mid	6665	5.19	5.61	16.62	24.00	-7.38