

9.1.52. 802.11a MODE 2TX IN THE UNII-8 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	5.20	8.21	24.00	-1.00
Mid	6995	5.20	8.21	24.00	-1.00
High	7115	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-1.34	-1.58	6.75	24.00	-17.25
Mid	6995	-1.50	-1.33	6.80	24.00	-17.20
High	7115	-5.12	-4.34	3.50	24.00	-20.50

9.1.53. 802.11be EHT20 MODE 2TX IN THE UNII-8 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	5.20	8.21	24.00	-1.00
Mid	6995	5.20	8.21	24.00	-1.00
High	7115	5.20	8.21	24.00	-1.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-9.85	-10.08	-1.75	24.00	-25.75
Mid	6995	-10.70	-10.34	-2.31	24.00	-26.31
High	7115	-15.19	-14.54	-6.64	24.00	-30.64

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6875	-13.41	-13.07	-2.01	-1.00	-1.01
Mid	6995	-14.54	-13.87	-2.97	-1.00	-1.97
High	7115	-13.42	-12.40	-1.66	-1.00	-0.66

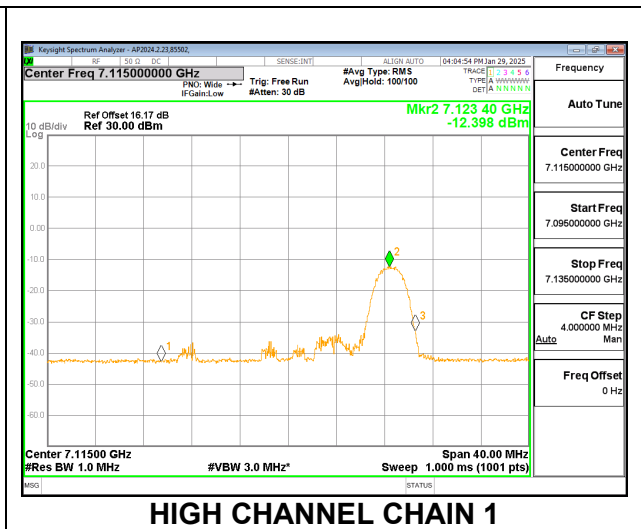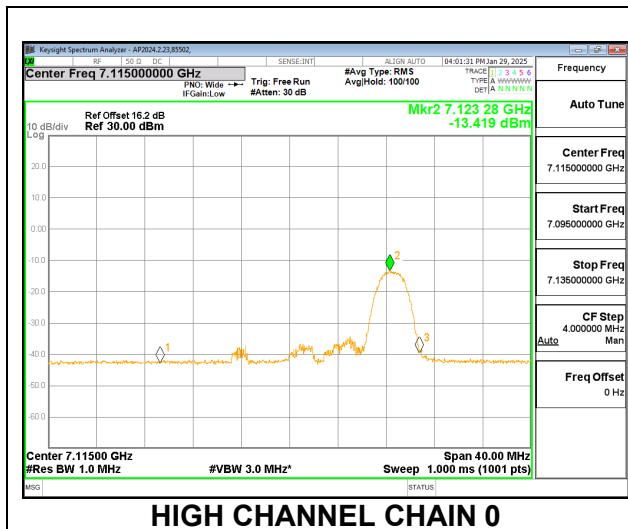

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	5.20	8.21	24.00	-1.00
Mid	6995	5.20	8.21	24.00	-1.00
High	7115	5.20	8.21	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-6.58	-6.64	1.60	24.00	-22.40
Mid	6995	-7.02	-6.76	1.32	24.00	-22.68
High	7115	-12.22	-11.73	-3.76	24.00	-27.76

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6875	-12.79	-12.68	-1.51	-1.00	-0.51
Mid	6995	-13.04	-12.50	-1.54	-1.00	-0.54
High	7115	-13.76	-12.08	-1.62	-1.00	-0.62

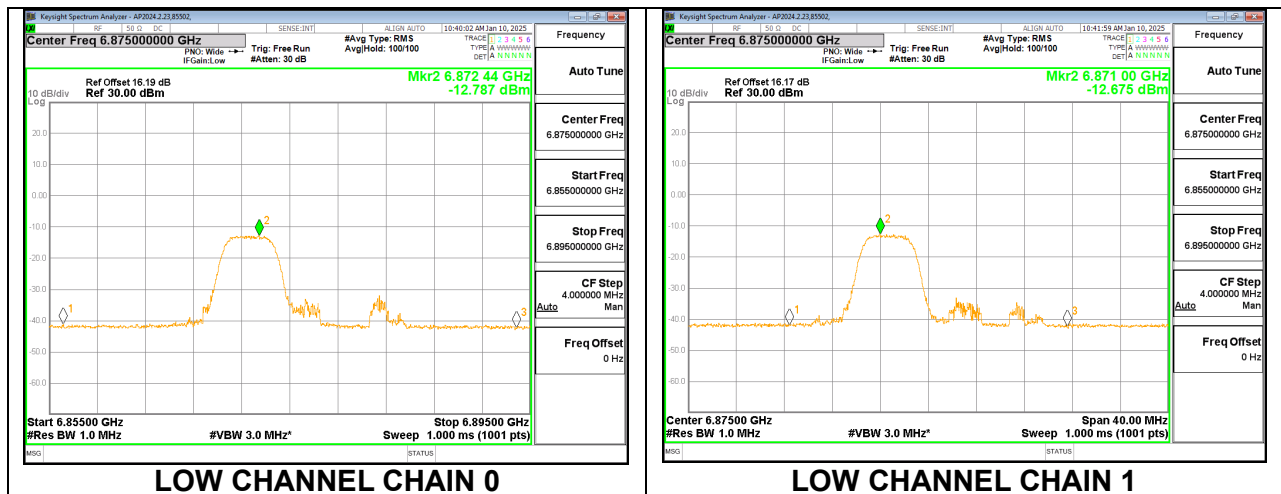

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	5.20	8.21	24.00	-1.00
Mid	6995	5.20	8.21	24.00	-1.00
High	7115	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-6.71	-6.87	1.42	24.00	-22.58
Mid	6995	-6.85	-6.73	1.42	24.00	-22.58
High	7115	-12.38	-11.91	-3.93	24.00	-27.93

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	5.20	8.21	24.00	-1.00
Mid	6995	5.20	8.21	24.00	-1.00
High	7115	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-4.14	-4.30	3.99	24.00	-20.01
Mid	6995	-4.26	-4.11	4.03	24.00	-19.97
High	7115	-10.94	-10.35	-2.42	24.00	-26.42

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	5.20	8.21	24.00	-1.00
Mid	6995	5.20	8.21	24.00	-1.00
High	7115	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-4.19	-4.23	4.00	24.00	-20.00
Mid	6995	-4.29	-4.02	4.06	24.00	-19.94
High	7115	-10.97	-10.36	-2.44	24.00	-26.44

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	5.20	8.21	24.00	-1.00
Mid	6995	5.20	8.21	24.00	-1.00
High	7115	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-1.72	-1.86	6.42	24.00	-17.58
Mid	6995	-1.85	-1.62	6.48	24.00	-17.52
High	7115	-1.71	-1.33	6.69	24.00	-17.31

9.1.54. 802.11be EHT40 MODE 2TX IN THE UNII-8 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6885	5.20	8.21	24.00	-1.00
Mid	6965	5.20	8.21	24.00	-1.00
High	7085	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6885	1.99	1.60	10.01	24.00	-13.99
Mid	6965	1.82	2.04	10.14	24.00	-13.86
High	7085	1.89	2.17	10.24	24.00	-13.76

9.1.55. 802.11be EHT80 MODE 2TX IN THE UNII-8 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	5.20	8.21	24.00	-1.00
Mid	6945	5.20	8.21	24.00	-1.00
High	7025	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	2.04	1.78	10.12	24.00	-13.88
Mid	6945	1.89	2.18	10.25	24.00	-13.75
High	7025	2.32	2.23	10.49	24.00	-13.51

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	5.20	8.21	24.00	-1.00
Mid	6945	5.20	8.21	24.00	-1.00
High	7025	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	2.10	1.80	10.16	24.00	-13.84
Mid	6945	1.91	2.14	10.24	24.00	-13.76
High	7025	2.26	2.25	10.47	24.00	-13.53

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	5.20	8.21	24.00	-1.00
Mid	6945	5.20	8.21	24.00	-1.00
High	7025	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	2.07	1.81	10.15	24.00	-13.85
Mid	6945	2.00	2.10	10.26	24.00	-13.74
High	7025	2.22	2.26	10.45	24.00	-13.55

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	5.20	8.21	24.00	-1.00
Mid	6945	5.20	8.21	24.00	-1.00
High	7025	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	5.85	6.11	14.19	24.00	-9.81
Mid	6945	5.99	6.30	14.36	24.00	-9.64
High	7025	6.19	6.19	14.40	24.00	-9.60

9.1.56. 802.11be EHT160 MODE 2TX IN THE UNII-8 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.94	5.85	14.11	24.00	-9.89
High	6985	6.12	5.52	14.04	24.00	-9.96

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.81	5.78	14.01	24.00	-9.99
High	6985	6.20	6.59	14.61	24.00	-9.39

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.89	5.88	14.10	24.00	-9.90
High	6985	6.17	6.51	14.55	24.00	-9.45

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.62	5.47	13.76	24.00	-10.24
High	6985	5.98	5.83	14.12	24.00	-9.88

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.71	5.50	13.82	24.00	-10.18
High	6985	5.96	5.88	14.13	24.00	-9.87

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.65	5.43	13.75	24.00	-10.25
High	6985	5.88	5.93	14.12	24.00	-9.88

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.53	5.52	13.74	24.00	-10.26
High	6985	5.93	5.96	14.16	24.00	-9.84

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.79	5.52	13.87	24.00	-10.13
High	6985	6.08	6.11	14.31	24.00	-9.69

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.58	5.41	13.71	24.00	-10.29
High	6985	6.03	6.07	14.26	24.00	-9.74

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.82	5.50	13.87	24.00	-10.13
High	6985	5.98	5.98	14.19	24.00	-9.81

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	5.20	8.21	24.00	-1.00
High	6985	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	8.47	8.29	16.59	24.00	-7.41
High	6985	6.02	5.90	14.17	24.00	-9.83

9.1.57. 802.11be EHT320 MODE 2TX IN THE UNII-8 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.57	8.70	16.85	24.00	-7.15
High	6905	8.69	9.01	17.06	24.00	-6.94

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.52	8.50	16.72	24.00	-7.28
High	6905	8.54	8.94	16.95	24.00	-7.05

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.87	8.90	17.10	24.00	-6.90
High	6905	9.01	9.26	17.35	24.00	-6.65

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	6.79	6.81	15.01	24.00	-8.99
High	6905	6.64	6.96	15.01	24.00	-8.99

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	6.79	6.77	14.99	24.00	-9.01
High	6905	6.90	7.16	15.24	24.00	-8.76

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.42	8.44	16.64	24.00	-7.36
High	6905	8.56	8.84	16.91	24.00	-7.09

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	7.64	7.71	15.89	24.00	-8.11
High	6905	7.75	7.83	16.00	24.00	-8.00

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.60	8.49	16.76	24.00	-7.24
High	6905	8.45	8.75	16.81	24.00	-7.19

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.90	8.68	17.00	24.00	-7.00
High	6905	8.66	8.98	17.03	24.00	-6.97

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.53	8.42	16.69	24.00	-7.31
High	6905	8.69	9.10	17.11	24.00	-6.89

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.53	8.58	16.77	24.00	-7.23
High	6905	8.64	8.98	17.02	24.00	-6.98

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.84	8.74	17.00	24.00	-7.00
High	6905	8.89	9.30	17.31	24.00	-6.69

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.71	8.73	16.93	24.00	-7.07
High	6905	8.69	9.05	17.08	24.00	-6.92

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.85	8.81	17.04	24.00	-6.96
High	6905	8.60	8.83	16.93	24.00	-7.07

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	8.52	8.50	16.72	24.00	-7.28
High	6905	8.54	8.94	16.95	24.00	-7.05

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	5.20	8.21	24.00	-1.00
High	6905	5.20	8.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	11.11	10.92	19.23	24.00	-4.77
High	6905	11.04	11.21	19.34	24.00	-4.66

9.1.58. 802.11a MODE 2TX IN THE UNII-8 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	7.30	10.31	24.00	-1.00
Mid	6995	7.30	10.31	24.00	-1.00
High	7115	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-3.51	-3.38	6.87	24.00	-17.13
Mid	6995	-3.80	-3.00	6.93	24.00	-17.07
High	7115	-5.52	-4.44	5.36	24.00	-18.64

9.1.59. 802.11be EHT20 MODE 2TX IN THE UNII-8 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	7.30	10.31	24.00	-1.00
Mid	6995	7.30	10.31	24.00	-1.00
High	7115	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-11.50	-10.84	-0.85	24.00	-24.85
Mid	6995	-12.22	-11.19	-1.36	24.00	-25.36
High	7115	-16.83	-15.43	-5.76	24.00	-29.76

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	7.30	10.31	24.00	-1.00
Mid	6995	7.30	10.31	24.00	-1.00
High	7115	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-8.49	-7.95	2.10	24.00	-21.90
Mid	6995	-8.97	-7.99	1.86	24.00	-22.14
High	7115	-15.24	-14.03	-4.28	24.00	-28.28

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	7.30	10.31	24.00	-1.00
Mid	6995	7.30	10.31	24.00	-1.00
High	7115	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-8.73	-8.03	1.94	24.00	-22.06
Mid	6995	-8.81	-7.82	2.02	24.00	-21.98
High	7115	-15.37	-14.24	-4.46	24.00	-28.46

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	7.30	10.31	24.00	-1.00
Mid	6995	7.30	10.31	24.00	-1.00
High	7115	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-6.13	-5.48	4.52	24.00	-19.48
Mid	6995	-6.22	-5.21	4.62	24.00	-19.38
High	7115	-14.39	-13.16	-3.42	24.00	-27.42

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	7.30	10.31	24.00	-1.00
Mid	6995	7.30	10.31	24.00	-1.00
High	7115	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-6.15	-5.52	4.49	24.00	-19.51
Mid	6995	-6.16	-5.28	4.61	24.00	-19.39
High	7115	-14.40	-13.19	-3.44	24.00	-27.44

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	7.30	10.31	24.00	-1.00
Mid	6995	7.30	10.31	24.00	-1.00
High	7115	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-4.28	-3.69	6.34	24.00	-17.66
Mid	6995	-4.25	-3.44	6.48	24.00	-17.52
High	7115	-10.42	-9.27	0.50	24.00	-23.50

9.1.60. 802.11be EHT40 MODE 2TX IN THE UNII-8 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6885	7.30	10.31	24.00	-1.00
Mid	7005	7.30	10.31	24.00	-1.00
High	7085	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6885	0.30	0.94	10.94	24.00	-13.06
Mid	7005	0.14	1.42	11.14	24.00	-12.86
High	7085	0.36	1.45	11.25	24.00	-12.75

9.1.61. 802.11be EHT80 MODE 2TX IN THE UNII-8 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	7.30	10.31	24.00	-1.00
Mid	6945	7.30	10.31	24.00	-1.00
High	7025	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	0.87	0.86	11.18	24.00	-12.82
Mid	6945	1.39	0.64	11.34	24.00	-12.66
High	7025	1.42	1.08	11.56	24.00	-12.44

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	7.30	10.31	24.00	-1.00
Mid	6945	7.30	10.31	24.00	-1.00
High	7025	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	0.86	0.91	11.20	24.00	-12.80
Mid	6945	1.32	0.77	11.36	24.00	-12.64
High	7025	1.38	1.10	11.55	24.00	-12.45

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	7.30	10.31	24.00	-1.00
Mid	6945	7.30	10.31	24.00	-1.00
High	7025	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	0.90	0.82	11.17	24.00	-12.83
Mid	6945	1.31	0.69	11.32	24.00	-12.68
High	7025	1.40	0.98	11.51	24.00	-12.49

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	7.30	10.31	24.00	-1.00
Mid	6945	7.30	10.31	24.00	-1.00
High	7025	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	4.38	4.02	14.51	24.00	-9.49
Mid	6945	5.12	4.14	14.97	24.00	-9.03
High	7025	4.95	4.72	15.15	24.00	-8.85

9.1.62. 802.11be EHT160 MODE 2TX IN THE UNII-8 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	4.12	4.10	14.42	24.00	-9.58
High	6985	5.10	4.25	15.01	24.00	-8.99

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	4.16	4.07	14.43	24.00	-9.57
High	6985	5.23	4.34	15.12	24.00	-8.88

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	4.16	4.10	14.44	24.00	-9.56
High	6985	5.16	4.19	15.01	24.00	-8.99

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	3.85	3.92	14.20	24.00	-9.80
High	6985	4.06	4.88	14.80	24.00	-9.20

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	3.60	3.77	14.00	24.00	-10.00
High	6985	3.70	4.51	14.43	24.00	-9.57

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	3.68	3.74	14.02	24.00	-9.98
High	6985	4.06	4.98	14.85	24.00	-9.15

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	3.73	3.75	14.05	24.00	-9.95
High	6985	3.91	4.63	14.60	24.00	-9.40

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	3.66	3.96	14.12	24.00	-9.88
High	6985	4.01	4.76	14.71	24.00	-9.29

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	3.65	3.73	14.00	24.00	-10.00
High	6985	3.97	4.69	14.66	24.00	-9.34

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	3.87	3.89	14.19	24.00	-9.81
High	6985	4.08	4.88	14.81	24.00	-9.19

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	7.30	10.31	24.00	-1.00
High	6985	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.93	5.62	16.09	24.00	-7.91
High	6985	5.55	5.15	15.66	24.00	-8.34

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	6825	-15.19	-14.77	-1.66	-1.00	-0.66
High	6985	-15.73	-15.42	-2.25	-1.00	-1.25

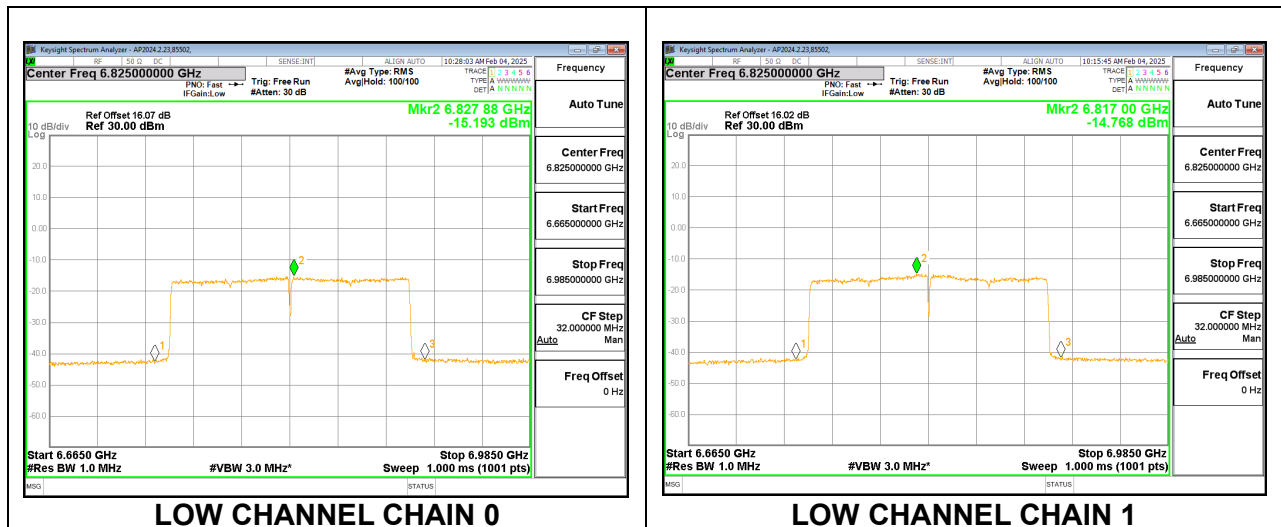

9.1.63. 802.11be EHT320 MODE 2TX IN THE UNII-8 BAND (MID GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	7.21	7.64	17.74	24.00	-6.26
High	6905	6.09	6.65	16.69	24.00	-7.31

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.48	5.84	15.97	24.00	-8.03
High	6905	4.12	4.69	14.72	24.00	-9.28

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.50	5.64	15.88	24.00	-8.12
High	6905	3.86	4.37	14.43	24.00	-9.57

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.50	5.73	15.93	24.00	-8.07
High	6905	3.88	4.44	14.48	24.00	-9.52

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.18	5.43	15.62	24.00	-8.38
High	6905	3.91	4.50	14.53	24.00	-9.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	7.28	6.82	17.37	24.00	-6.63
High	6905	6.29	5.60	16.27	24.00	-7.73

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	7.34	6.84	17.41	24.00	-6.59
High	6905	6.29	5.62	16.28	24.00	-7.72

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	7.26	6.87	17.38	24.00	-6.62
High	6905	6.27	5.59	16.25	24.00	-7.75

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	7.38	6.92	17.47	24.00	-6.53
High	6905	6.47	5.80	16.46	24.00	-7.54

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	7.27	7.47	17.68	24.00	-6.32
High	6905	5.93	6.38	16.47	24.00	-7.53

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	6.99	7.36	17.49	24.00	-6.51
High	6905	6.04	6.51	16.59	24.00	-7.41

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	7.24	7.49	17.68	24.00	-6.32
High	6905	6.12	6.68	16.72	24.00	-7.28

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	6.95	7.29	17.43	24.00	-6.57
High	6905	6.06	6.65	16.68	24.00	-7.32

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	7.18	7.45	17.63	24.00	-6.37
High	6905	5.79	6.36	16.39	24.00	-7.61

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	6.63	6.94	17.10	24.00	-6.90
High	6905	5.59	6.16	16.19	24.00	-7.81

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	7.30	10.31	24.00	-1.00
High	6905	7.30	10.31	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	9.86	10.09	20.29	24.00	-3.71
High	6905	9.47	10.12	20.12	24.00	-3.88

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6745	-15.09	-16.93	-2.60	-1.00	-1.60
High	6905	-16.67	-14.73	-2.27	-1.00	-1.27

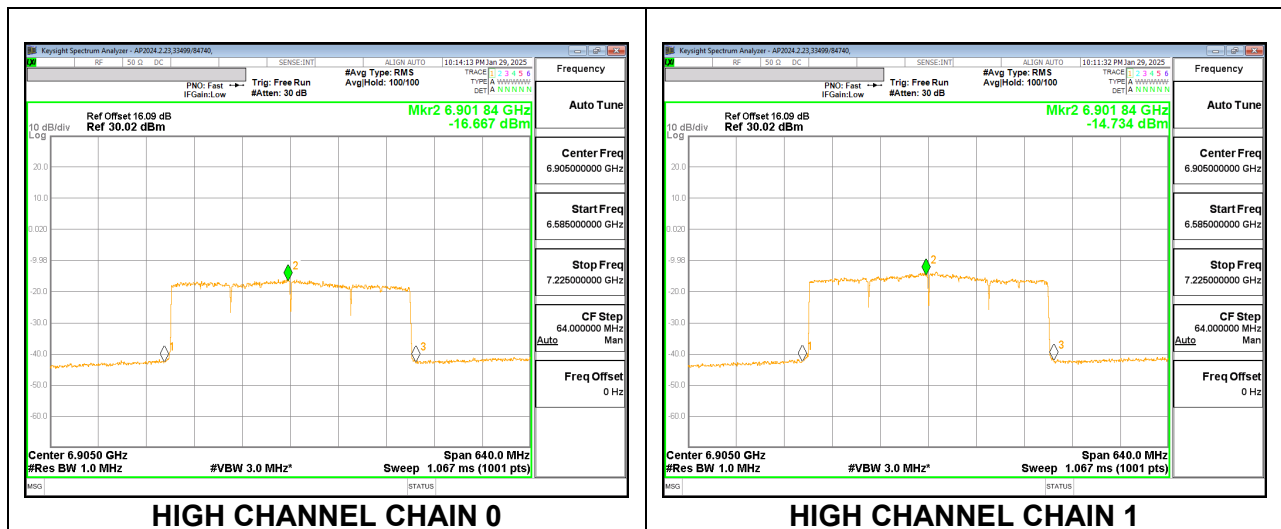

9.1.64. 802.11a MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	8.20	11.21	24.00	-1.00
Mid	6995	8.20	11.21	24.00	-1.00
High	7115	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-4.96	-4.96	6.25	24.00	-17.75
Mid	6995	-4.97	-4.60	6.43	24.00	-17.57
High	7115	-5.10	-4.31	6.52	24.00	-17.48

9.1.65. 802.11be EHT20 MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	8.20	11.21	24.00	-1.00
Mid	6995	8.20	11.21	24.00	-1.00
High	7115	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-16.54	-16.41	-5.26	24.00	-29.26
Mid	6995	-17.23	-16.63	-5.71	24.00	-29.71
High	7115	-16.83	-15.93	-5.15	24.00	-29.15

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	8.20	11.21	24.00	-1.00
Mid	6995	8.20	11.21	24.00	-1.00
High	7115	8.20	11.21	24.00	-1.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-13.56	-13.54	-2.34	24.00	-26.34
Mid	6995	-13.98	-13.60	-2.58	24.00	-26.58
High	7115	-13.76	-12.98	-2.14	24.00	-26.14

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd EIRP PSD (dBm)	PSD Limit EIRP (dBm)	PSD Margin (dB)
Low	6875	-19.15	-17.70	-4.15	-1.00	-3.15
Mid	6995	-19.37	-17.57	-4.16	-1.00	-3.16
High	7115	-19.15	-18.01	-4.32	-1.00	-3.32

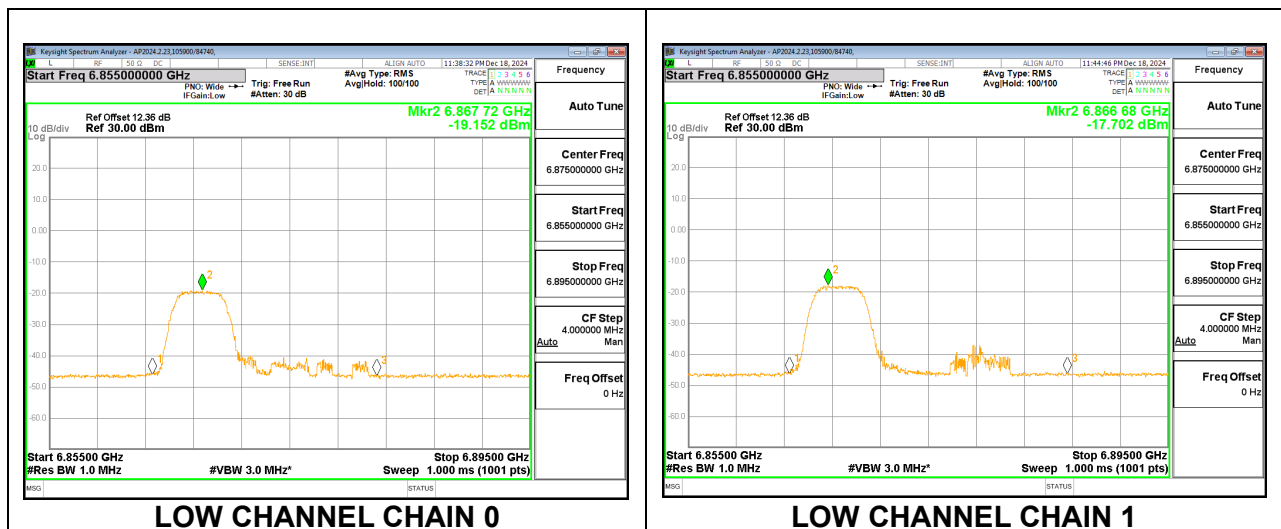

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	8.20	11.21	24.00	-1.00
Mid	6995	8.20	11.21	24.00	-1.00
High	7115	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-13.77	-13.59	-2.47	24.00	-26.47
Mid	6995	-13.89	-13.38	-2.42	24.00	-26.42
High	7115	-13.92	-13.31	-2.39	24.00	-26.39

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	8.20	11.21	24.00	-1.00
Mid	6995	8.20	11.21	24.00	-1.00
High	7115	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-13.26	-13.13	-1.98	24.00	-25.98
Mid	6995	-13.37	-12.89	-1.91	24.00	-25.91
High	7115	-13.90	-13.17	-2.31	24.00	-26.31

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	8.20	11.21	24.00	-1.00
Mid	6995	8.20	11.21	24.00	-1.00
High	7115	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-13.77	-13.59	-2.47	24.00	-26.47
Mid	6995	-13.89	-13.38	-2.42	24.00	-26.42
High	7115	-15.36	-14.73	-3.82	24.00	-27.82

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6875	8.20	11.21	24.00	-1.00
Mid	6995	8.20	11.21	24.00	-1.00
High	7115	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6875	-10.33	-10.40	0.85	24.00	-23.15
Mid	6995	-10.45	-10.15	0.91	24.00	-23.09
High	7115	-10.50	-9.75	1.10	24.00	-22.90

9.1.66. 802.11be EHT40 MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	e.i.r.p. Power Limit (dBm)	PSD Limit (dBm)
Low	6885	8.20	11.21	24.00	-1.00
Mid	7005	8.20	11.21	24.00	-1.00
High	7085	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6885	-1.14	-1.33	9.98	24.00	-14.02
Mid	7005	-1.31	-1.14	9.99	24.00	-14.01
High	7085	-1.19	-0.69	10.28	24.00	-13.72

9.1.67. 802.11be EHT80 MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	8.20	11.21	24.00	-1.00
Mid	6945	8.20	11.21	24.00	-1.00
High	7025	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	-1.01	-1.28	10.07	24.00	-13.93
Mid	6945	-1.19	-1.02	10.11	24.00	-13.89
High	7025	-0.89	-0.74	10.40	24.00	-13.60

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	8.20	11.21	24.00	-1.00
Mid	6945	8.20	11.21	24.00	-1.00
High	7025	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	-1.00	-1.78	9.84	24.00	-14.16
Mid	6945	-1.18	-0.92	10.16	24.00	-13.84
High	7025	-0.91	-0.73	10.39	24.00	-13.61

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	8.20	11.21	24.00	-1.00
Mid	6945	8.20	11.21	24.00	-1.00
High	7025	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	-1.03	-1.17	10.11	24.00	-13.89
Mid	6945	-1.15	-0.88	10.20	24.00	-13.80
High	7025	-0.89	-0.70	10.42	24.00	-13.58

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6865	8.20	11.21	24.00	-1.00
Mid	6945	8.20	11.21	24.00	-1.00
High	7025	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6865	2.03	1.75	13.10	24.00	-10.90
Mid	6945	1.88	2.25	13.28	24.00	-10.72
High	7025	2.28	2.27	13.49	24.00	-10.51

9.1.68. 802.11be EHT160 MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	2.50	2.14	13.53	24.00	-10.47
High	6985	2.10	2.35	13.44	24.00	-10.56

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	1.75	1.40	12.79	24.00	-11.21
High	6985	1.26	1.49	12.59	24.00	-11.41

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	2.28	1.87	13.29	24.00	-10.71
High	6985	1.76	2.04	13.11	24.00	-10.89

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	2.05	1.65	13.06	24.00	-10.94
High	6985	1.59	1.75	12.88	24.00	-11.12

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	2.03	1.61	13.04	24.00	-10.96
High	6985	1.52	1.74	12.84	24.00	-11.16

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	1.82	1.52	12.88	24.00	-11.12
High	6985	1.37	1.70	12.75	24.00	-11.25

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	2.05	1.77	13.12	24.00	-10.88
High	6985	1.61	1.76	12.90	24.00	-11.10

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	2.07	1.68	13.09	24.00	-10.91
High	6985	1.63	1.72	12.89	24.00	-11.11

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	1.96	1.65	13.02	24.00	-10.98
High	6985	1.56	1.65	12.82	24.00	-11.18

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	2.07	1.68	13.09	24.00	-10.91
High	6985	1.63	1.72	12.89	24.00	-11.11

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6825	8.20	11.21	24.00	-1.00
High	6985	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6825	5.23	5.06	16.36	24.00	-7.64
High	6985	5.45	5.44	16.66	24.00	-7.34

9.1.69. 802.11be EHT320 MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.46	5.47	16.68	24.00	-7.32
High	6905	5.36	5.62	16.70	24.00	-7.30

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	3.10	2.47	14.01	24.00	-9.99
High	6905	2.96	2.38	13.89	24.00	-10.11

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.43	5.30	16.58	24.00	-7.42
High	6905	5.49	5.63	16.77	24.00	-7.23

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.34	5.13	16.45	24.00	-7.55
High	6905	5.37	5.70	16.75	24.00	-7.25

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.41	5.35	16.59	24.00	-7.41
High	6905	5.43	5.61	16.73	24.00	-7.27

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	4.96	4.93	16.16	24.00	-7.84
High	6905	5.07	5.35	16.42	24.00	-7.58

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.04	5.09	16.28	24.00	-7.72
High	6905	5.04	5.25	16.36	24.00	-7.64

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.13	5.05	16.30	24.00	-7.70
High	6905	5.19	5.47	16.54	24.00	-7.46

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.15	5.21	16.39	24.00	-7.61
High	6905	5.20	5.57	16.60	24.00	-7.40

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.25	5.17	16.42	24.00	-7.58
High	6905	5.13	5.59	16.58	24.00	-7.42

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.23	5.11	16.38	24.00	-7.62
High	6905	5.27	5.56	16.63	24.00	-7.37

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.21	5.23	16.43	24.00	-7.57
High	6905	5.14	5.50	16.53	24.00	-7.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.14	5.20	16.38	24.00	-7.62
High	6905	5.17	5.47	16.53	24.00	-7.47

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.23	5.08	16.37	24.00	-7.63
High	6905	5.10	5.55	16.54	24.00	-7.46

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	5.21	5.21	16.42	24.00	-7.58
High	6905	5.13	5.36	16.46	24.00	-7.54

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T – LOW POWER INDOOR

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	EIRP Power Limit (dBm)	PSD Limit (dBm)
Low	6745	8.20	11.21	24.00	-1.00
High	6905	8.20	11.21	24.00	-1.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6745	7.43	7.65	18.75	24.00	-5.25
High	6905	7.43	7.67	18.76	24.00	-5.24