


Scan Settings (2 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	AUTO LN	OFF
1M	30M	10k	9k	QP+AV	20ms	AUTO LN	OFF

Transducer No.	Start	Stop	Name
12	150k	30M	CECF

Final Measurement: x QP / + AV
 Meas Time: 1 s
 Subranges: 16
 Acc Margin: 30dB

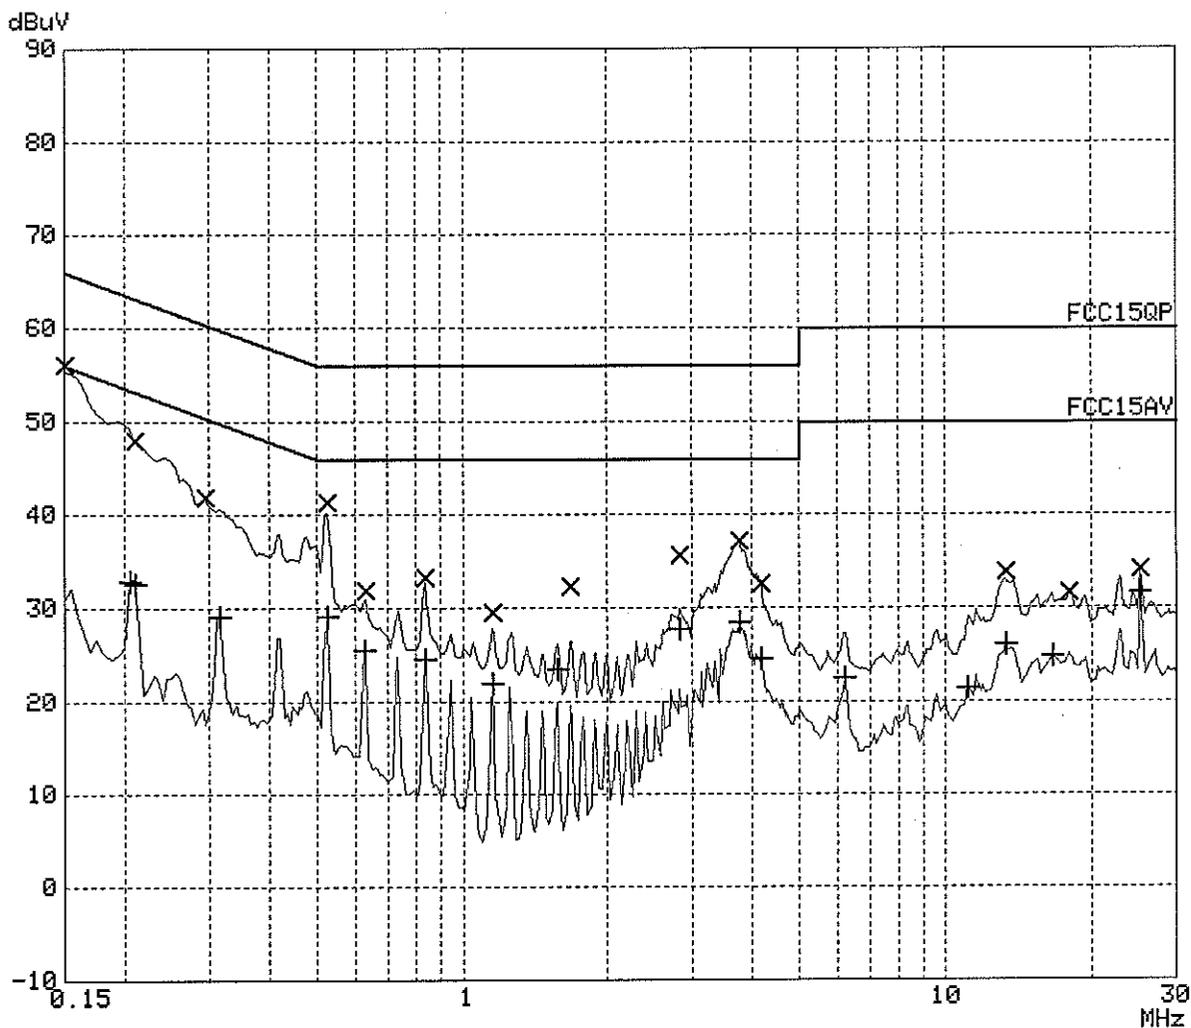

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.15000	56.2	-9.7	L1	gnd
0.21000	48.0	-15.1	N	gnd
0.29500	41.9	-18.4	N	gnd
0.52500	41.4	-14.5	L1	gnd
0.63000	32.0	-23.9	N	gnd
0.83500	33.3	-22.6	L1	gnd
1.15000	29.6	-26.3	N	gnd
1.67000	32.4	-23.5	N	gnd
2.83000	35.7	-20.2	N	gnd
3.77000	37.3	-18.7	L1	gnd
4.17000	32.7	-23.2	L1	gnd
13.29000	33.8	-26.1	N	gnd
17.87000	31.6	-28.3	L1	gnd
25.16000	34.1	-25.8	L1	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.20500	32.8	-20.5	L1	gnd
0.21000	32.7	-20.5	L1	gnd
0.31500	29.2	-20.5	L1	gnd
0.52500	29.2	-16.7	L1	gnd
0.62500	25.6	-20.4	L1	gnd
0.83500	24.6	-21.3	L1	gnd
1.15000	21.9	-24.0	L1	gnd
1.57000	23.5	-22.4	N	gnd
2.82000	27.7	-18.2	N	gnd
3.76000	28.5	-17.4	L1	gnd
4.17000	24.5	-21.4	L1	gnd
6.21000	22.5	-27.4	N	gnd
11.08000	21.5	-28.4	L1	gnd
13.28000	26.1	-23.8	N	gnd
16.57000	24.8	-25.1	L1	gnd
25.16000	31.6	-18.3	L1	gnd

* limit exceeded