

LTE Conducted Power (ENDC)							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		20.01		0
		1	24		19.98		0
		1	49		19.80		0
		25	0		18.97		1
		25	12		18.95		1
		25	25		18.86		1
		50	0		18.89		1
10M	16QAM	1	0		19.30		1
		1	24		19.26		1
		1	49		19.23		1
		25	0		17.85		2
		25	12		17.77		2
		25	25		17.74		2
		50	0		17.78		2
10M	64QAM	1	0		18.19		2
		1	24		18.17		2
		1	49		18.13		2
		25	0		16.91		3
		25	12		16.84		3
		25	25		16.77		3
		50	0		16.83		3
10M	256QAM	1	0		15.14		5
		1	24		15.10		5
		1	49		15.07		5
		25	0		14.80		5
		25	12		14.74		5
		25	25		14.71		5
		50	0		14.76		5
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	19.89	19.96	19.95	0
		1	12	19.95	19.88	19.86	0
		1	24	19.64	19.79	19.57	0
		12	0	18.76	18.82	18.74	1
		12	6	18.92	18.89	18.84	1
		12	13	18.75	18.81	18.66	1
		25	0	18.73	18.80	18.65	1
5M	16QAM	1	0	19.20	19.29	19.03	1
		1	12	19.12	19.16	19.11	1
		1	24	19.13	19.20	19.04	1
		12	0	17.77	17.84	17.74	2
		12	6	17.61	17.76	17.56	2
		12	13	17.69	17.72	17.68	2
		25	0	17.65	17.74	17.55	2
5M	64QAM	1	0	18.02	18.13	17.99	2
		1	12	18.01	18.15	17.93	2
		1	24	18.07	18.08	17.97	2
		12	0	16.82	16.86	16.83	3
		12	6	16.67	16.82	16.65	3
		12	13	16.69	16.73	16.58	3
		25	0	16.66	16.80	16.62	3
5M	256QAM	1	0	15.06	15.07	14.95	5
		1	12	15.03	15.10	14.89	5
		1	24	14.88	15.01	14.90	5
		12	0	14.65	14.74	14.60	5
		12	6	14.67	14.71	14.56	5
		12	13	14.54	14.65	14.54	5
		25	0	14.74	14.76	14.64	5

LTE Conducted Power (ENDC)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		20.01		0
		1	24		19.92		0
		1	49		19.94		0
		25	0		18.98		1
		25	12		18.95		1
		25	25		18.91		1
		50	0		19.01		1
10M	16QAM	1	0		19.21		1
		1	24		19.15		1
		1	49		19.10		1
		25	0		17.93		2
		25	12		17.88		2
		25	25		17.85		2
		50	0		17.97		2
10M	64QAM	1	0		18.08		2
		1	24		18.04		2
		1	49		18.00		2
		25	0		16.94		3
		25	12		16.90		3
		25	25		16.88		3
		50	0		16.90		3
10M	256QAM	1	0		15.02		5
		1	24		14.97		5
		1	49		14.94		5
		25	0		14.95		5
		25	12		14.92		5
		25	25		14.88		5
		50	0		14.94		5
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	19.96	19.97	19.84	0
		1	12	19.82	19.82	19.74	0
		1	24	19.80	19.91	19.74	0
		12	0	18.94	18.92	18.86	1
		12	6	18.81	18.85	18.86	1
		12	13	18.88	18.85	18.80	1
		25	0	18.90	19.00	18.76	1
5M	16QAM	1	0	19.11	19.14	19.00	1
		1	12	19.10	19.13	19.00	1
		1	24	18.94	19.07	18.95	1
		12	0	17.89	17.85	17.77	2
		12	6	17.72	17.85	17.66	2
		12	13	17.73	17.78	17.75	2
		25	0	17.79	17.92	17.72	2
5M	64QAM	1	0	18.04	18.02	17.99	2
		1	12	17.96	18.00	17.90	2
		1	24	17.90	17.99	17.86	2
		12	0	16.86	16.94	16.80	3
		12	6	16.77	16.89	16.69	3
		12	13	16.76	16.79	16.75	3
		25	0	16.84	16.90	16.77	3
5M	256QAM	1	0	14.86	14.93	14.76	5
		1	12	14.86	14.87	14.84	5
		1	24	14.87	14.90	14.74	5
		12	0	14.89	14.92	14.76	5
		12	6	14.87	14.90	14.69	5
		12	13	14.72	14.85	14.61	5
		25	0	14.76	14.94	14.74	5

LTE Conducted Power (ENDC)							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	20.11	20.09	20.06	0
		1	24	19.99	19.94	19.87	0
		1	49	19.84	19.77	19.74	0
		25	0	18.93	18.91	18.88	1
		25	12	18.87	18.77	18.67	1
		25	25	18.82	18.78	18.75	1
		50	0	18.83	18.81	18.79	1
10M	16QAM	1	0	19.44	19.35	19.31	1
		1	24	19.38	19.34	19.31	1
		1	49	19.34	19.30	19.24	1
		25	0	17.98	17.89	17.84	2
		25	12	17.95	17.88	17.84	2
		25	25	17.93	17.83	17.74	2
		50	0	17.89	17.79	17.75	2
10M	64QAM	1	0	18.26	18.26	18.25	2
		1	24	18.21	18.11	18.10	2
		1	49	18.18	18.09	18.06	2
		25	0	17.01	16.91	16.86	3
		25	12	16.98	16.92	16.91	3
		25	25	16.95	16.86	16.77	3
		50	0	16.89	16.86	16.76	3
10M	256QAM	1	0	15.16	15.16	15.10	5
		1	24	15.11	15.10	15.00	5
		1	49	15.08	14.98	14.95	5
		25	0	14.85	14.85	14.77	5
		25	12	14.81	14.79	14.72	5
		25	25	14.77	14.71	14.61	5
		50	0	14.79	14.76	14.75	5
BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	
5M	QPSK	1	0	20.09	19.93	19.87	0
		1	12	19.94	19.93	19.83	0
		1	24	19.74	19.72	19.73	0
		12	0	18.90	18.83	18.92	1
		12	6	18.87	18.73	18.64	1
		12	13	18.73	18.76	18.75	1
		25	0	18.80	18.73	18.78	1
5M	16QAM	1	0	19.39	19.27	19.28	1
		1	12	19.29	19.30	19.27	1
		1	24	19.26	19.25	19.22	1
		12	0	17.95	17.88	17.84	2
		12	6	17.91	17.82	17.81	2
		12	13	17.89	17.82	17.64	2
		25	0	17.86	17.77	17.68	2
5M	64QAM	1	0	18.19	18.21	18.17	2
		1	12	18.20	18.07	18.03	2
		1	24	18.12	17.99	17.96	2
		12	0	16.92	16.87	16.79	3
		12	6	16.92	16.89	16.87	3
		12	13	16.90	16.76	16.71	3
		25	0	16.82	16.86	16.76	3
5M	256QAM	1	0	15.15	15.13	15.00	5
		1	12	15.10	15.09	14.98	5
		1	24	15.02	14.90	14.88	5
		12	0	14.75	14.81	14.74	5
		12	6	14.81	14.79	14.72	5
		12	13	14.73	14.65	14.59	5
		25	0	14.78	14.66	14.75	5

LTE Conducted Power (ENDC)							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	19.87	20.04	20.15	0
		1	50	19.86	20.02	20.13	0
		1	99	19.83	19.97	20.11	0
		50	0	19.01	19.22	19.30	1
		50	25	18.92	19.08	19.27	1
		50	50	18.90	19.15	19.25	1
		100	0	18.99	19.24	19.26	1
20M	16QAM	1	0	19.00	19.19	19.31	1
		1	50	18.98	19.23	19.26	1
		1	99	18.86	19.03	19.20	1
		50	0	17.97	18.17	18.27	2
		50	25	17.93	18.18	18.24	2
		50	50	17.95	18.13	18.21	2
		100	0	17.97	18.19	18.25	2
20M	64QAM	1	0	17.87	18.03	18.22	2
		1	50	17.86	18.06	18.19	2
		1	99	17.87	18.06	18.16	2
		50	0	17.05	17.21	17.30	3
		50	25	16.96	17.17	17.27	3
		50	50	16.89	17.04	17.22	3
		100	0	16.91	17.11	17.24	3
20M	256QAM	1	0	14.88	15.13	15.22	5
		1	50	14.84	15.00	15.19	5
		1	99	14.82	14.99	15.14	5
		50	0	14.79	15.03	15.19	5
		50	25	14.75	15.07	15.17	5
		50	50	14.71	15.03	15.13	5
		100	0	14.79	14.94	15.12	5
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	19.74	19.90	20.12	0
		1	37	19.74	19.89	20.04	0
		1	74	19.80	19.92	20.06	0
		36	0	18.92	19.21	19.26	1
		36	19	18.87	19.08	19.27	1
		36	39	18.86	19.08	19.23	1
		75	0	18.89	19.14	19.16	1
15M	16QAM	1	0	18.98	19.18	19.28	1
		1	37	18.92	19.23	19.17	1
		1	74	18.78	18.93	19.18	1
		36	0	17.89	18.07	18.23	2
		36	19	17.84	18.09	18.23	2
		36	39	17.90	18.03	18.16	2
		75	0	17.94	18.18	18.22	2
15M	64QAM	1	0	17.80	17.93	18.21	2
		1	37	17.82	18.00	18.11	2
		1	74	17.79	17.98	18.08	2
		36	0	17.02	17.17	17.25	3
		36	19	16.88	17.16	17.23	3
		36	39	16.87	16.94	17.16	3
		75	0	16.83	17.02	17.19	3
15M	256QAM	1	0	14.82	15.13	15.16	5
		1	37	14.82	14.94	15.15	5
		1	74	14.81	14.93	15.10	5
		36	0	14.71	14.96	15.15	5
		36	19	14.67	15.05	15.17	5
		36	39	14.61	14.97	15.07	5
		75	0	14.72	14.87	15.03	5

LTE Conducted Power (ENDC)							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	19.74	19.88	20.12	0
		1	24	19.82	19.94	20.10	0
		1	49	19.77	19.96	20.09	0
		25	0	19.01	19.21	19.28	1
		25	12	18.85	18.98	19.27	1
		25	25	18.88	19.11	19.15	1
		50	0	18.90	19.15	19.21	1
10M	16QAM	1	0	18.90	19.11	19.23	1
		1	24	18.97	19.17	19.25	1
		1	49	18.81	18.98	19.11	1
		25	0	17.96	18.13	18.22	2
		25	12	17.86	18.15	18.24	2
		25	25	17.89	18.11	18.16	2
		50	0	17.90	18.11	18.24	2
10M	64QAM	1	0	17.85	18.00	18.19	2
		1	24	17.80	18.00	18.15	2
		1	49	17.85	17.97	18.13	2
		25	0	16.99	17.17	17.30	3
		25	12	16.89	17.10	17.21	3
		25	25	16.81	16.94	17.19	3
		50	0	16.86	17.07	17.14	3
10M	256QAM	1	0	14.85	15.06	15.18	5
		1	24	14.80	14.97	15.16	5
		1	49	14.76	14.91	15.05	5
		25	0	14.71	14.99	15.16	5
		25	12	14.67	15.00	15.09	5
		25	25	14.64	14.99	15.04	5
		50	0	14.78	14.90	15.07	5
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	19.69	19.87	20.09	0
		1	12	19.78	19.95	20.12	0
		1	24	19.74	19.93	20.09	0
		12	0	18.98	19.17	19.23	1
		12	6	18.88	19.00	19.26	1
		12	13	18.85	19.06	19.18	1
		25	0	18.89	19.15	19.20	1
5M	16QAM	1	0	18.97	19.11	19.26	1
		1	12	18.96	19.21	19.24	1
		1	24	18.81	19.01	19.18	1
		12	0	17.89	18.17	18.27	2
		12	6	17.84	18.12	18.18	2
		12	13	17.85	18.12	18.12	2
		25	0	17.89	18.17	18.22	2
5M	64QAM	1	0	17.78	18.03	18.15	2
		1	12	17.79	17.96	18.17	2
		1	24	17.83	17.96	18.16	2
		12	0	17.01	17.18	17.24	3
		12	6	16.93	17.11	17.19	3
		12	13	16.80	17.01	17.17	3
		25	0	16.83	17.05	17.20	3
5M	256QAM	1	0	14.85	15.07	15.14	5
		1	12	14.76	14.90	15.19	5
		1	24	14.73	14.92	15.08	5
		12	0	14.78	15.03	15.13	5
		12	6	14.75	14.97	15.12	5
		12	13	14.71	14.93	15.05	5
		25	0	14.78	14.87	15.05	5

LTE Conducted Power (ENDC)							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	19.76	19.94	20.06	0
		1	7	19.73	19.96	20.04	0
		1	14	19.76	19.96	20.11	0
		8	0	18.97	19.16	19.21	1
		8	3	18.86	19.03	19.24	1
		8	7	18.87	19.10	19.16	1
		15	0	18.96	19.21	19.25	1
3M	16QAM	1	0	18.96	19.19	19.25	1
		1	7	18.90	19.22	19.21	1
		1	14	18.85	19.01	19.17	1
		8	0	17.88	18.17	18.26	2
		8	3	17.91	18.09	18.24	2
		8	7	17.88	18.06	18.15	2
		15	0	17.90	18.14	18.24	2
3M	64QAM	1	0	17.84	18.01	18.16	2
		1	7	17.84	18.05	18.14	2
		1	14	17.86	18.00	18.09	2
		8	0	17.03	17.11	17.26	3
		8	3	16.92	17.09	17.27	3
		8	7	16.87	16.98	17.19	3
		15	0	16.81	17.05	17.17	3
3M	256QAM	1	0	14.88	15.10	15.15	5
		1	7	14.78	14.90	15.09	5
		1	14	14.77	14.97	15.05	5
		8	0	14.71	14.95	15.09	5
		8	3	14.67	14.98	15.14	5
		8	7	14.63	14.97	15.08	5
		15	0	14.72	14.91	15.05	5
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	19.67	19.84	19.99	0
		1	2	19.77	19.87	19.96	0
		1	5	19.72	19.79	19.94	0
		3	0	19.63	19.86	19.92	0
		3	1	19.62	19.83	19.91	0
		3	3	19.59	19.80	19.85	0
		6	0	18.92	19.16	19.18	1
1.4M	16QAM	1	0	18.89	18.96	19.15	1
		1	2	18.80	19.18	19.13	1
		1	5	18.69	18.88	19.14	1
		3	0	18.87	19.08	19.20	1
		3	1	18.72	18.98	19.07	1
		3	3	18.82	18.95	19.05	1
		6	0	17.91	18.06	18.15	2
1.4M	64QAM	1	0	17.67	17.83	18.17	2
		1	2	17.67	17.95	18.17	2
		1	5	17.65	17.97	18.00	2
		3	0	18.01	18.07	18.15	2
		3	1	17.83	18.02	18.20	2
		3	3	17.72	17.89	18.09	2
		6	0	16.70	16.93	17.15	3
1.4M	256QAM	1	0	14.74	14.91	15.04	5
		1	2	14.74	14.93	15.11	5
		1	5	14.70	14.85	14.95	5
		3	0	14.62	14.88	15.00	5
		3	1	14.52	14.94	15.03	5
		3	3	14.62	14.86	15.09	5
		6	0	14.69	14.85	14.92	5

LTE Conducted Power (ENDC)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	20.55	20.52	20.51	0
		1	37	20.43	20.33	20.24	0
		1	74	20.39	20.29	20.15	0
		36	0	19.58	19.48	19.40	1
		36	19	19.56	19.46	19.32	1
		36	39	19.50	19.40	19.21	1
		75	0	19.55	19.45	19.32	1
15M	16QAM	1	0	19.83	19.73	19.35	1
		1	37	19.80	19.70	19.25	1
		1	74	19.77	19.67	19.15	1
		36	0	18.56	18.46	18.36	2
		36	19	18.53	18.43	18.26	2
		36	39	18.52	18.42	18.29	2
		75	0	18.54	18.44	18.34	2
15M	64QAM	1	0	18.66	18.56	18.38	2
		1	37	18.64	18.54	18.25	2
		1	74	18.62	18.52	18.16	2
		36	0	17.60	17.50	17.34	3
		36	19	17.58	17.48	17.27	3
		36	39	17.52	17.42	17.26	3
		75	0	17.55	17.45	17.37	3
15M	256QAM	1	0	15.63	15.53	15.27	5
		1	37	15.60	15.50	15.17	5
		1	74	15.58	15.48	15.26	5
		36	0	15.59	15.49	15.34	5
		36	19	15.55	15.45	15.25	5
		36	39	15.52	15.42	15.20	5
		75	0	15.56	15.46	15.40	5
BW	MCS Index	Channel		26740	26840	26990	3GPP MPR
		Frequency (MHz)		819	829	844	
10M	QPSK	1	0	20.33	20.29	20.30	0
		1	24	20.23	20.17	20.15	0
		1	49	20.22	20.05	20.14	0
		25	0	19.40	19.27	19.30	1
		25	12	19.34	19.08	19.23	1
		25	25	19.29	19.01	19.19	1
		50	0	19.39	19.20	19.22	1
10M	16QAM	1	0	19.35	19.30	19.36	1
		1	24	19.26	19.17	19.20	1
		1	49	19.23	19.05	19.10	1
		25	0	18.32	18.30	18.37	2
		25	12	18.29	18.12	18.26	2
		25	25	18.22	18.02	18.20	2
		50	0	18.39	18.17	18.32	2
10M	64QAM	1	0	18.30	18.23	18.34	2
		1	24	18.17	18.10	18.17	2
		1	49	18.21	18.01	18.12	2
		25	0	17.41	17.32	17.37	3
		25	12	17.29	17.10	17.27	3
		25	25	17.28	17.08	17.17	3
		50	0	17.40	17.21	17.29	3
10M	256QAM	1	0	15.26	15.23	15.32	5
		1	24	15.22	15.05	15.25	5
		1	49	15.29	14.99	15.06	5
		25	0	15.33	15.33	15.35	5
		25	12	15.26	15.12	15.26	5
		25	25	15.23	15.08	15.29	5
		50	0	15.41	15.19	15.32	5

LTE Conducted Power (ENDC)							
LTE Band 26							
BW	MCS Index	Channel		26715	26815	27015	3GPP MPR
		Frequency (MHz)		816.5	826.5	846.5	
5M	QPSK	1	0	20.32	20.33	20.31	0
		1	12	20.26	20.15	20.20	0
		1	24	20.15	20.09	20.08	0
		12	0	19.32	19.26	19.39	1
		12	6	19.30	19.17	19.22	1
		12	13	19.26	18.99	19.15	1
		25	0	19.42	19.20	19.29	1
5M	16QAM	1	0	19.36	19.29	19.31	1
		1	12	19.18	19.17	19.22	1
		1	24	19.18	19.09	19.10	1
		12	0	18.41	18.27	18.36	2
		12	6	18.30	18.07	18.31	2
		12	13	18.20	18.07	18.11	2
		25	0	18.37	18.22	18.28	2
5M	64QAM	1	0	18.31	18.33	18.30	2
		1	12	18.20	18.10	18.14	2
		1	24	18.23	18.05	18.06	2
		12	0	17.34	17.30	17.32	3
		12	6	17.36	17.14	17.22	3
		12	13	17.20	17.02	17.20	3
		25	0	17.41	17.17	17.31	3
5M	256QAM	1	0	15.29	15.23	15.27	5
		1	12	15.16	15.11	15.18	5
		1	24	15.23	14.95	15.14	5
		12	0	15.30	15.37	15.26	5
		12	6	15.20	15.08	15.22	5
		12	13	15.20	15.09	15.29	5
		25	0	15.42	15.17	15.29	5
BW	MCS Index	Channel		26705	26805	27025	3GPP MPR
		Frequency (MHz)		815.5	825.5	847.5	
3M	QPSK	1	0	20.34	20.33	20.31	0
		1	7	20.19	20.16	20.15	0
		1	14	20.16	20.02	20.12	0
		8	0	19.39	19.29	19.38	1
		8	3	19.32	19.12	19.32	1
		8	7	19.27	19.07	19.21	1
		15	0	19.34	19.17	19.26	1
3M	16QAM	1	0	19.33	19.30	19.32	1
		1	7	19.22	19.20	19.16	1
		1	14	19.13	19.06	19.15	1
		8	0	18.31	18.26	18.40	2
		8	3	18.36	18.16	18.29	2
		8	7	18.20	17.98	18.14	2
		15	0	18.32	18.22	18.32	2
3M	64QAM	1	0	18.29	18.26	18.32	2
		1	7	18.24	18.11	18.16	2
		1	14	18.18	18.01	18.14	2
		8	0	17.35	17.32	17.40	3
		8	3	17.29	17.10	17.32	3
		8	7	17.23	17.04	17.14	3
		15	0	17.41	17.19	17.26	3
3M	256QAM	1	0	15.30	15.24	15.26	5
		1	7	15.18	15.14	15.18	5
		1	14	15.24	14.94	15.08	5
		8	0	15.35	15.35	15.35	5
		8	3	15.23	15.11	15.26	5
		8	7	15.24	15.10	15.24	5
		15	0	15.40	15.18	15.25	5

LTE Conducted Power (ENDC)							
LTE Band 26							
BW	MCS Index	Channel		26697	26797	27033	3GPP MPR
		Frequency (MHz)		814.7	824.7	848.3	
1.4M	QPSK	1	0	20.22	20.14	20.16	0
		1	2	20.21	20.12	20.10	0
		1	5	20.10	20.06	20.01	0
		3	0	20.16	20.14	20.16	0
		3	1	20.14	19.98	20.09	0
		3	3	20.09	19.90	19.99	0
		6	0	19.19	19.03	19.12	1
1.4M	16QAM	1	0	19.19	19.12	19.13	1
		1	2	19.61	19.47	19.56	1
		1	5	19.49	19.41	19.47	1
		3	0	19.16	19.18	19.21	1
		3	1	19.12	19.00	19.12	1
		3	3	19.15	18.94	19.00	1
1.4M	64QAM	6	0	18.24	18.04	18.12	2
		1	0	18.20	18.08	18.14	2
		1	2	18.57	18.53	18.59	2
		1	5	18.57	18.42	18.47	2
		3	0	18.21	18.12	18.17	2
		3	1	18.19	17.97	18.13	2
		3	3	18.14	17.92	17.96	2
1.4M	256QAM	6	0	17.24	17.04	17.07	3
		1	0	15.11	15.09	15.12	5
		1	2	15.07	14.92	15.03	5
		1	5	15.13	14.88	14.92	5
		3	0	15.21	15.15	15.12	5
		3	1	15.12	15.01	15.01	5
		3	3	15.12	14.92	15.04	5
1.4M	256QAM	6	0	15.27	15.05	15.09	5

LTE Conducted Power (ENDC)							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		18.73		0
		1	24		18.71		0
		1	49		18.63		0
		25	0		17.78		1
		25	12		17.69		1
		25	25		17.58		1
		50	0		17.66		1
10M	16QAM	1	0		18.05		1
		1	24		18.02		1
		1	49		17.98		1
		25	0		16.77		2
		25	12		16.74		2
		25	25		16.72		2
		50	0		16.63		2
10M	64QAM	1	0		16.86		2
		1	24		16.81		2
		1	49		16.76		2
		25	0		15.75		3
		25	12		15.72		3
		25	25		15.68		3
		50	0		15.67		3
10M	256QAM	1	0		13.75		5
		1	24		13.71		5
		1	49		13.67		5
		25	0		13.65		5
		25	12		13.62		5
		25	25		13.58		5
		50	0		13.54		5
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	18.56	18.65	18.57	0
		1	12	18.53	18.65	18.53	0
		1	24	18.49	18.60	18.48	0
		12	0	17.62	17.72	17.66	1
		12	6	17.60	17.68	17.62	1
		12	13	17.37	17.50	17.42	1
		25	0	17.54	17.58	17.59	1
5M	16QAM	1	0	17.83	18.03	17.89	1
		1	12	17.85	17.95	17.85	1
		1	24	17.87	17.89	17.88	1
		12	0	16.53	16.72	16.60	2
		12	6	16.56	16.74	16.63	2
		12	13	16.51	16.69	16.53	2
		25	0	16.42	16.53	16.56	2
5M	64QAM	1	0	16.80	16.79	16.83	2
		1	12	16.65	16.78	16.67	2
		1	24	16.59	16.71	16.58	2
		12	0	15.62	15.75	15.64	3
		12	6	15.57	15.64	15.61	3
		12	13	15.52	15.60	15.58	3
		25	0	15.50	15.58	15.55	3
5M	256QAM	1	0	13.64	13.68	13.70	5
		1	12	13.52	13.63	13.51	5
		1	24	13.53	13.64	13.57	5
		12	0	13.51	13.64	13.47	5
		12	6	13.45	13.59	13.44	5
		12	13	13.40	13.58	13.48	5
		25	0	13.44	13.46	13.46	5

LTE Conducted Power (ENDC)							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	20.23	20.28	20.11	0
		1	50	20.22	20.18	20.08	0
		1	99	20.05	20.01	19.94	0
		50	0	19.32	19.38	19.25	1
		50	25	19.35	19.25	19.15	1
		50	50	19.21	19.19	19.13	1
		100	0	19.26	19.26	19.25	1
20M	16QAM	1	0	19.39	19.37	19.36	1
		1	50	19.32	19.28	19.19	1
		1	99	19.21	19.13	19.08	1
		50	0	18.38	18.36	18.28	2
		50	25	18.35	18.35	18.26	2
		50	50	18.25	18.21	18.19	2
		100	0	18.31	18.21	18.13	2
20M	64QAM	1	0	17.96	17.94	17.91	2
		1	50	17.91	17.84	17.74	2
		1	99	17.75	17.66	17.57	2
		50	0	16.86	16.77	16.69	3
		50	25	16.71	16.66	16.66	3
		50	50	16.64	16.65	16.60	3
		100	0	16.74	16.62	16.59	3
20M	256QAM	1	0	15.35	15.25	15.16	5
		1	50	15.25	15.17	15.10	5
		1	99	15.22	15.15	15.12	5
		50	0	15.19	15.17	15.09	5
		50	25	15.16	15.14	15.05	5
		50	50	15.14	15.09	15.06	5
		100	0	15.20	15.10	15.05	5
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	20.25	20.10	20.08	0
		1	37	20.17	20.08	20.00	0
		1	74	19.99	19.99	19.92	0
		36	0	19.29	19.23	19.22	1
		36	19	19.27	19.17	19.08	1
		36	39	19.16	19.17	19.03	1
		75	0	19.16	19.26	19.20	1
15M	16QAM	1	0	19.37	19.34	19.36	1
		1	37	19.22	19.28	19.14	1
		1	74	19.12	19.03	19.05	1
		36	0	18.34	18.32	18.24	2
		36	19	18.27	18.30	18.26	2
		36	39	18.24	18.12	18.19	2
		75	0	18.31	18.17	18.10	2
15M	64QAM	1	0	17.88	17.91	17.83	2
		1	37	17.90	17.83	17.69	2
		1	74	17.73	17.59	17.52	2
		36	0	16.76	16.73	16.69	3
		36	19	16.71	16.66	16.56	3
		36	39	16.56	16.64	16.52	3
		75	0	16.68	16.60	16.54	3
15M	256QAM	1	0	15.35	15.22	15.12	5
		1	37	15.18	15.12	15.01	5
		1	74	15.16	15.11	15.07	5
		36	0	15.19	15.17	15.04	5
		36	19	15.13	15.11	14.95	5
		36	39	15.14	15.04	15.03	5
		75	0	15.15	15.01	14.97	5

LTE Conducted Power (ENDC)							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	20.20	20.17	20.03	0
		1	24	20.20	20.12	19.98	0
		1	49	20.04	19.91	19.89	0
		25	0	19.36	19.24	19.15	1
		25	12	19.31	19.22	19.05	1
		25	25	19.17	19.16	19.10	1
		50	0	19.21	19.18	19.19	1
10M	16QAM	1	0	19.37	19.31	19.36	1
		1	24	19.32	19.26	19.12	1
		1	49	19.13	19.09	19.06	1
		25	0	18.30	18.32	18.18	2
		25	12	18.28	18.25	18.20	2
		25	25	18.19	18.21	18.18	2
		50	0	18.29	18.20	18.10	2
10M	64QAM	1	0	17.90	17.93	17.85	2
		1	24	17.82	17.78	17.71	2
		1	49	17.73	17.60	17.48	2
		25	0	16.85	16.75	16.60	3
		25	12	16.67	16.61	16.59	3
		25	25	16.54	16.56	16.51	3
		50	0	16.73	16.60	16.54	3
10M	256QAM	1	0	15.27	15.21	15.09	5
		1	24	15.22	15.16	15.01	5
		1	49	15.15	15.09	15.12	5
		25	0	15.18	15.09	14.99	5
		25	12	15.15	15.12	15.03	5
		25	25	15.08	15.08	15.06	5
		50	0	15.19	15.01	14.96	5
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	20.19	20.17	20.06	0
		1	12	20.21	20.11	20.07	0
		1	24	20.05	19.93	19.93	0
		12	0	19.29	19.21	19.18	1
		12	6	19.32	19.16	19.07	1
		12	13	19.11	19.10	19.11	1
		25	0	19.19	19.17	19.24	1
5M	16QAM	1	0	19.36	19.34	19.30	1
		1	12	19.31	19.22	19.11	1
		1	24	19.12	19.04	19.08	1
		12	0	18.28	18.36	18.18	2
		12	6	18.27	18.32	18.20	2
		12	13	18.21	18.18	18.12	2
		25	0	18.22	18.15	18.03	2
5M	64QAM	1	0	17.88	17.92	17.89	2
		1	12	17.81	17.77	17.73	2
		1	24	17.74	17.63	17.51	2
		12	0	16.83	16.72	16.61	3
		12	6	16.67	16.59	16.56	3
		12	13	16.56	16.63	16.52	3
		25	0	16.74	16.54	16.51	3
5M	256QAM	1	0	15.26	15.24	15.09	5
		1	12	15.21	15.17	15.04	5
		1	24	15.19	15.13	15.11	5
		12	0	15.17	15.07	15.02	5
		12	6	15.13	15.08	14.98	5
		12	13	15.09	15.09	14.99	5
		25	0	15.17	15.10	15.03	5

LTE Conducted Power (ENDC)									
LTE Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	19.46	19.82	19.87	19.99	19.95	0
		1	50	19.40	19.75	19.81	19.93	19.89	0
		1	99	19.38	19.73	19.79	19.91	19.87	0
		50	0	18.43	18.78	18.84	18.96	18.92	1
		50	25	18.41	18.76	18.82	18.94	18.90	1
		50	50	18.37	18.72	18.78	18.90	18.86	1
		100	0	18.33	18.68	18.74	18.86	18.82	1
20M	16QAM	1	0	18.47	18.82	18.88	19.00	18.96	1
		1	50	18.42	18.77	18.83	18.95	18.91	1
		1	99	18.40	18.75	18.81	18.93	18.89	1
		50	0	17.44	17.79	17.85	17.97	17.93	2
		50	25	17.39	17.74	17.80	17.92	17.88	2
		50	50	17.37	17.72	17.78	17.90	17.86	2
		100	0	17.38	17.73	17.79	17.91	17.87	2
20M	64QAM	1	0	17.43	17.78	17.84	17.96	17.92	2
		1	50	17.41	17.76	17.82	17.94	17.90	2
		1	99	17.36	17.71	17.77	17.89	17.85	2
		50	0	16.48	16.83	16.89	17.01	16.97	3
		50	25	16.44	16.79	16.85	16.97	16.93	3
		50	50	16.39	16.74	16.80	16.92	16.88	3
		100	0	16.46	16.81	16.87	16.99	16.95	3
20M	256QAM	1	0	14.57	14.92	14.98	15.10	15.06	5
		1	50	14.53	14.88	14.94	15.06	15.02	5
		1	99	14.48	14.83	14.89	15.01	14.97	5
		50	0	14.40	14.75	14.81	14.93	14.89	5
		50	25	14.46	14.81	14.87	14.99	14.95	5
		50	50	14.39	14.74	14.80	14.92	14.88	5
		100	0	14.37	14.72	14.78	14.90	14.86	5
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	19.37	19.79	19.85	19.93	19.89	0
		1	37	19.39	19.71	19.77	19.87	19.83	0
		1	74	19.34	19.64	19.70	19.83	19.79	0
		36	0	18.35	18.76	18.82	18.88	18.84	1
		36	19	18.37	18.76	18.82	18.91	18.87	1
		36	39	18.37	18.65	18.71	18.90	18.86	1
		75	0	18.27	18.58	18.64	18.86	18.82	1
15M	16QAM	1	0	18.44	18.75	18.81	18.96	18.92	1
		1	37	18.40	18.73	18.79	18.89	18.85	1
		1	74	18.31	18.65	18.71	18.87	18.83	1
		36	0	17.36	17.76	17.82	17.87	17.83	2
		36	19	17.32	17.72	17.78	17.91	17.87	2
		36	39	17.30	17.71	17.77	17.82	17.78	2
		75	0	17.33	17.66	17.72	17.85	17.81	2
15M	64QAM	1	0	17.40	17.74	17.80	17.91	17.87	2
		1	37	17.41	17.74	17.80	17.84	17.80	2
		1	74	17.35	17.63	17.69	17.80	17.76	2
		36	0	16.46	16.76	16.82	16.98	16.94	3
		36	19	16.43	16.69	16.75	16.92	16.88	3
		36	39	16.30	16.71	16.77	16.89	16.85	3
		75	0	16.42	16.71	16.77	16.95	16.91	3
15M	256QAM	1	0	14.52	14.90	14.96	15.07	15.03	5
		1	37	14.51	14.81	14.87	15.03	14.99	5
		1	74	14.40	14.79	14.85	15.00	14.96	5
		36	0	14.38	14.65	14.71	14.87	14.83	5
		36	19	14.45	14.74	14.80	14.97	14.93	5
		36	39	14.34	14.70	14.76	14.86	14.82	5
		75	0	14.34	14.67	14.73	14.82	14.78	5

LTE Conducted Power (ENDC)									
LTE Band 41									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	19.35	19.75	19.81	19.86	19.82	0
		1	24	19.33	19.63	19.69	19.82	19.78	0
		1	49	19.29	19.61	19.67	19.79	19.75	0
		25	0	18.35	18.74	18.80	18.80	18.76	1
		25	12	18.36	18.75	18.81	18.83	18.79	1
		25	25	18.24	18.53	18.59	18.81	18.77	1
		50	0	18.14	18.57	18.63	18.78	18.74	1
10M	16QAM	1	0	18.41	18.67	18.73	18.85	18.81	1
		1	24	18.38	18.67	18.73	18.77	18.73	1
		1	49	18.16	18.51	18.57	18.78	18.74	1
		25	0	17.31	17.65	17.71	17.86	17.82	2
		25	12	17.17	17.70	17.76	17.86	17.82	2
		25	25	17.19	17.67	17.73	17.81	17.77	2
		50	0	17.32	17.62	17.68	17.70	17.66	2
10M	64QAM	1	0	17.26	17.74	17.80	17.81	17.77	2
		1	24	17.31	17.70	17.76	17.76	17.72	2
		1	49	17.31	17.51	17.57	17.74	17.70	2
		25	0	16.37	16.74	16.80	16.90	16.86	3
		25	12	16.39	16.54	16.60	16.87	16.83	3
		25	25	16.22	16.69	16.75	16.80	16.76	3
		50	0	16.28	16.60	16.66	16.81	16.77	3
10M	256QAM	1	0	14.41	14.75	14.81	14.96	14.92	5
		1	24	14.47	14.72	14.78	15.02	14.98	5
		1	49	14.35	14.79	14.85	14.88	14.84	5
		25	0	14.28	14.55	14.61	14.86	14.82	5
		25	12	14.36	14.71	14.77	14.94	14.90	5
		25	25	14.25	14.58	14.64	14.85	14.81	5
		50	0	14.20	14.53	14.59	14.80	14.76	5
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	19.43	19.76	19.82	19.90	19.86	0
		1	12	19.24	19.56	19.62	19.82	19.78	0
		1	24	19.27	19.58	19.64	19.83	19.79	0
		12	0	18.26	18.66	18.72	18.79	18.75	1
		12	6	18.27	18.66	18.72	18.84	18.80	1
		12	13	18.20	18.64	18.70	18.88	18.84	1
		25	0	18.20	18.65	18.71	18.71	18.67	1
5M	16QAM	1	0	18.29	18.72	18.78	18.91	18.87	1
		1	12	18.28	18.68	18.74	18.80	18.76	1
		1	24	18.37	18.66	18.72	18.91	18.87	1
		12	0	17.28	17.66	17.72	17.85	17.81	2
		12	6	17.24	17.55	17.61	17.79	17.75	2
		12	13	17.13	17.54	17.60	17.74	17.70	2
		25	0	17.25	17.61	17.67	17.84	17.80	2
5M	64QAM	1	0	17.28	17.63	17.69	17.84	17.80	2
		1	12	17.30	17.54	17.60	17.84	17.80	2
		1	24	17.29	17.69	17.75	17.82	17.78	2
		12	0	16.39	16.66	16.72	16.91	16.87	3
		12	6	16.41	16.70	16.76	16.87	16.83	3
		12	13	16.29	16.52	16.58	16.90	16.86	3
		25	0	16.31	16.70	16.76	16.96	16.92	3
5M	256QAM	1	0	14.50	14.74	14.80	14.93	14.89	5
		1	12	14.39	14.85	14.91	14.88	14.84	5
		1	24	14.40	14.74	14.80	14.81	14.77	5
		12	0	14.18	14.57	14.63	14.81	14.77	5
		12	6	14.30	14.67	14.73	14.90	14.86	5
		12	13	14.23	14.60	14.66	14.87	14.83	5
		25	0	14.27	14.59	14.65	14.68	14.64	5

LTE Conducted Power (ENDC)									
LTE Band 41 PC2									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	22.70	22.79	22.84	23.03	22.91	0
		1	50	22.51	22.70	22.75	22.96	22.82	0
		1	99	22.49	22.42	22.47	22.69	22.54	0
		50	0	21.99	21.85	21.90	22.09	21.97	1
		50	25	21.90	21.68	21.73	21.98	21.80	1
		50	50	21.76	21.65	21.70	21.89	21.77	1
		100	0	21.72	21.68	21.73	21.93	21.80	1
20M	16QAM	1	0	21.62	21.82	21.87	22.19	21.94	1
		1	50	21.58	21.73	21.78	22.06	21.85	1
		1	99	21.51	21.39	21.44	21.99	21.51	1
		50	0	20.80	20.83	20.88	21.10	20.95	2
		50	25	20.86	20.73	20.78	21.02	20.85	2
		50	50	20.85	20.60	20.65	20.94	20.72	2
		100	0	20.78	20.65	20.70	20.96	20.77	2
20M	64QAM	1	0	20.61	20.80	20.85	21.02	20.92	2
		1	50	20.51	20.67	20.72	20.94	20.79	2
		1	99	20.53	20.45	20.50	20.86	20.57	2
		50	0	19.78	19.85	19.90	20.03	19.97	3
		50	25	19.91	19.72	19.77	19.98	19.84	3
		50	50	19.85	19.65	19.70	19.92	19.77	3
		100	0	19.70	19.66	19.71	19.97	19.78	3
20M	256QAM	1	0	17.60	17.94	17.99	18.02	18.06	5
		1	50	17.79	17.77	17.82	17.97	17.89	5
		1	99	17.68	17.76	17.81	17.93	17.88	5
		50	0	17.53	17.84	17.89	18.02	17.96	5
		50	25	17.83	17.78	17.83	17.94	17.90	5
		50	50	17.82	17.65	17.70	17.86	17.77	5
		100	0	17.73	17.70	17.75	17.92	17.82	5
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	22.48	22.58	22.63	22.74	22.70	0
		1	37	22.48	22.51	22.56	22.70	22.63	0
		1	74	22.42	22.51	22.56	22.35	22.63	0
		36	0	21.94	21.86	21.91	21.85	21.98	1
		36	19	21.83	21.82	21.87	21.59	21.94	1
		36	39	21.73	21.70	21.75	21.56	21.82	1
		75	0	21.63	21.71	21.76	21.62	21.83	1
15M	16QAM	1	0	21.43	21.51	21.56	21.73	21.63	1
		1	37	21.44	21.58	21.63	21.60	21.70	1
		1	74	21.45	21.49	21.54	21.42	21.61	1
		36	0	20.89	20.84	20.89	20.78	20.96	2
		36	19	20.89	20.78	20.83	20.59	20.90	2
		36	39	20.66	20.74	20.79	20.57	20.86	2
		75	0	20.64	20.69	20.74	20.59	20.81	2
15M	64QAM	1	0	20.44	20.51	20.56	20.75	20.63	2
		1	37	20.45	20.53	20.58	20.64	20.65	2
		1	74	20.45	20.56	20.61	20.42	20.68	2
		36	0	19.96	19.81	19.86	19.83	19.93	3
		36	19	19.82	19.80	19.85	19.67	19.92	3
		36	39	19.68	19.74	19.79	19.61	19.86	3
		75	0	19.67	19.61	19.66	19.67	19.73	3
15M	256QAM	1	0	17.56	17.80	17.85	17.77	17.92	5
		1	37	17.55	17.76	17.81	17.70	17.88	5
		1	74	17.50	17.50	17.55	17.31	17.62	5
		36	0	17.72	17.86	17.91	17.79	17.98	5
		36	19	17.85	17.77	17.82	17.66	17.89	5
		36	39	17.83	17.68	17.73	17.60	17.80	5
		75	0	17.74	17.77	17.82	17.64	17.89	5

LTE Conducted Power (ENDC)									
LTE Band 41 PC2									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	22.48	22.51	22.56	22.75	22.63	0
		1	24	22.41	22.53	22.58	22.62	22.65	0
		1	49	22.48	22.48	22.53	22.38	22.60	0
		25	0	21.90	21.90	21.95	21.85	22.02	1
		25	12	21.87	21.76	21.81	21.58	21.88	1
		25	25	21.69	21.78	21.83	21.60	21.90	1
		50	0	21.72	21.61	21.66	21.59	21.73	1
10M	16QAM	1	0	21.44	21.56	21.61	21.74	21.68	1
		1	24	21.44	21.53	21.58	21.60	21.65	1
		1	49	21.42	21.47	21.52	21.36	21.59	1
		25	0	20.96	20.89	20.94	20.77	21.01	2
		25	12	20.86	20.81	20.86	20.66	20.93	2
		25	25	20.76	20.69	20.74	20.62	20.81	2
		50	0	20.62	20.71	20.76	20.63	20.83	2
10M	64QAM	1	0	20.48	20.52	20.57	20.74	20.64	2
		1	24	20.42	20.54	20.59	20.61	20.66	2
		1	49	20.44	20.47	20.52	20.40	20.59	2
		25	0	19.89	19.83	19.88	19.82	19.95	3
		25	12	19.85	19.78	19.83	19.63	19.90	3
		25	25	19.71	19.75	19.80	19.60	19.87	3
		50	0	19.65	19.71	19.76	19.65	19.83	3
10M	256QAM	1	0	17.58	17.80	17.85	17.80	17.92	5
		1	24	17.50	17.76	17.81	17.67	17.88	5
		1	49	17.42	17.51	17.56	17.37	17.63	5
		25	0	17.79	17.82	17.87	17.77	17.94	5
		25	12	17.83	17.76	17.81	17.68	17.88	5
		25	25	17.83	17.68	17.73	17.54	17.80	5
		50	0	17.71	17.73	17.78	17.65	17.85	5
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	22.51	22.59	22.64	22.72	22.71	0
		1	12	22.49	22.56	22.61	22.60	22.68	0
		1	24	22.44	22.48	22.53	22.38	22.60	0
		12	0	21.94	21.84	21.89	21.84	21.96	1
		12	6	21.82	21.82	21.87	21.63	21.94	1
		12	13	21.73	21.74	21.79	21.64	21.86	1
		25	0	21.69	21.68	21.73	21.65	21.80	1
5M	16QAM	1	0	21.51	21.51	21.56	21.74	21.63	1
		1	12	21.48	21.50	21.55	21.70	21.62	1
		1	24	21.46	21.53	21.58	21.41	21.65	1
		12	0	20.89	20.81	20.86	20.80	20.93	2
		12	6	20.89	20.85	20.90	20.58	20.97	2
		12	13	20.67	20.74	20.79	20.63	20.86	2
		25	0	20.65	20.64	20.69	20.62	20.76	2
5M	64QAM	1	0	20.46	20.51	20.56	20.71	20.63	2
		1	12	20.44	20.51	20.56	20.63	20.63	2
		1	24	20.48	20.49	20.54	20.40	20.61	2
		12	0	19.96	19.85	19.90	19.75	19.97	3
		12	6	19.82	19.84	19.89	19.67	19.96	3
		12	13	19.76	19.71	19.76	19.64	19.83	3
		25	0	19.65	19.63	19.68	19.64	19.75	3
5M	256QAM	1	0	17.59	17.72	17.77	17.81	17.84	5
		1	12	17.52	17.77	17.82	17.67	17.89	5
		1	24	17.44	17.55	17.60	17.37	17.67	5
		12	0	17.73	17.89	17.94	17.83	18.01	5
		12	6	17.81	17.77	17.82	17.73	17.89	5
		12	13	17.85	17.72	17.77	17.54	17.84	5
		25	0	17.78	17.78	17.83	17.55	17.90	5

LTE Conducted Power (ENDC)								
LTE Band 48								
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	18.15	18.14	18.12	17.92	0
		1	50	18.08	18.06	18.03	17.87	0
		1	99	17.87	17.85	17.82	17.66	0
		50	0	17.08	17.06	17.03	16.87	1
		50	25	17.05	17.03	17.00	16.84	1
		50	50	16.98	16.96	16.93	16.77	1
		100	0	17.03	17.01	16.98	16.82	1
20M	16QAM	1	0	17.19	17.17	17.14	16.98	1
		1	50	17.08	17.06	17.03	16.87	1
		1	99	16.97	16.95	16.92	16.76	1
		50	0	16.12	16.10	16.07	15.91	2
		50	25	16.08	16.06	16.03	15.87	2
		50	50	16.04	16.02	15.99	15.83	2
		100	0	16.05	16.03	16.00	15.84	2
20M	64QAM	1	0	15.63	15.61	15.58	15.42	2
		1	50	15.51	15.49	15.46	15.30	2
		1	99	15.45	15.43	15.40	15.24	2
		50	0	15.09	15.07	15.04	14.88	3
		50	25	15.06	15.04	15.01	14.85	3
		50	50	15.02	15.00	14.97	14.81	3
		100	0	15.04	15.02	14.99	14.83	3
20M	256QAM	1	0	13.05	13.03	13.00	12.84	5
		1	50	13.02	13.00	12.97	12.81	5
		1	99	12.99	12.97	12.94	12.78	5
		50	0	12.98	12.96	12.93	12.77	5
		50	25	12.92	12.90	12.87	12.71	5
		50	50	12.87	12.85	12.82	12.66	5
		100	0	12.89	12.87	12.84	12.68	5
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	18.02	18.00	17.97	17.81	0
		1	37	18.02	18.00	17.97	17.81	0
		1	74	17.86	17.84	17.81	17.65	0
		36	0	17.04	17.02	16.99	16.83	1
		36	19	17.04	17.02	16.99	16.83	1
		36	39	16.98	16.96	16.93	16.77	1
		75	0	17.01	16.99	16.96	16.80	1
15M	16QAM	1	0	17.08	17.06	17.03	16.87	1
		1	37	17.01	16.99	16.96	16.80	1
		1	74	16.81	16.79	16.76	16.60	1
		36	0	16.00	15.98	15.95	15.79	2
		36	19	15.96	15.94	15.91	15.75	2
		36	39	15.94	15.92	15.89	15.73	2
		75	0	15.98	15.96	15.93	15.77	2
15M	64QAM	1	0	16.04	16.02	15.99	15.83	2
		1	37	15.98	15.96	15.93	15.77	2
		1	74	15.83	15.81	15.78	15.62	2
		36	0	15.06	15.04	15.01	14.85	3
		36	19	14.99	14.97	14.94	14.78	3
		36	39	14.90	14.88	14.85	14.69	3
		75	0	15.01	14.99	14.96	14.80	3
15M	256QAM	1	0	13.15	13.13	13.10	12.94	5
		1	37	13.01	12.99	12.96	12.80	5
		1	74	12.97	12.95	12.92	12.76	5
		36	0	13.09	13.07	13.04	12.88	5
		36	19	13.01	12.99	12.96	12.80	5
		36	39	13.01	12.99	12.96	12.80	5
		75	0	12.97	12.95	12.92	12.76	5

LTE Conducted Power (ENDC)								
LTE Band 48								
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	18.09	18.07	18.04	17.88	0
		1	24	18.02	18.00	17.97	17.81	0
		1	49	17.82	17.80	17.77	17.61	0
		25	0	17.02	17.00	16.97	16.81	1
		25	12	17.02	17.00	16.97	16.81	1
		25	25	16.90	16.88	16.85	16.69	1
		50	0	16.96	16.94	16.91	16.75	1
10M	16QAM	1	0	17.00	16.98	16.95	16.79	1
		1	24	17.06	17.04	17.01	16.85	1
		1	49	16.83	16.81	16.78	16.62	1
		25	0	16.00	15.98	15.95	15.79	2
		25	12	15.98	15.96	15.93	15.77	2
		25	25	15.95	15.93	15.90	15.74	2
		50	0	15.99	15.97	15.94	15.78	2
10M	64QAM	1	0	16.08	16.06	16.03	15.87	2
		1	24	16.08	16.06	16.03	15.87	2
		1	49	15.81	15.79	15.76	15.60	2
		25	0	15.08	15.06	15.03	14.87	3
		25	12	15.02	15.00	14.97	14.81	3
		25	25	14.97	14.95	14.92	14.76	3
		50	0	14.99	14.97	14.94	14.78	3
10M	256QAM	1	0	13.09	13.07	13.04	12.88	5
		1	24	13.01	12.99	12.96	12.80	5
		1	49	12.89	12.87	12.84	12.68	5
		25	0	13.06	13.04	13.01	12.85	5
		25	12	13.06	13.04	13.01	12.85	5
		25	25	12.99	12.97	12.94	12.78	5
		50	0	13.05	13.03	13.00	12.84	5
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	18.01	17.99	17.96	17.80	0
		1	12	17.98	17.96	17.93	17.77	0
		1	24	17.82	17.80	17.77	17.61	0
		12	0	17.06	17.04	17.01	16.85	1
		12	6	16.97	16.95	16.92	16.76	1
		12	13	16.94	16.92	16.89	16.73	1
		25	0	17.02	17.00	16.97	16.81	1
5M	16QAM	1	0	17.05	17.03	17.00	16.84	1
		1	12	17.00	16.98	16.95	16.79	1
		1	24	16.77	16.75	16.72	16.56	1
		12	0	15.98	15.96	15.93	15.77	2
		12	6	15.95	15.93	15.90	15.74	2
		12	13	15.92	15.90	15.87	15.71	2
		25	0	16.03	16.01	15.98	15.82	2
5M	64QAM	1	0	16.00	15.98	15.95	15.79	2
		1	12	16.00	15.98	15.95	15.79	2
		1	24	15.82	15.80	15.77	15.61	2
		12	0	14.98	14.96	14.93	14.77	3
		12	6	14.99	14.97	14.94	14.78	3
		12	13	14.95	14.93	14.90	14.74	3
		25	0	15.01	14.99	14.96	14.80	3
5M	256QAM	1	0	13.09	13.07	13.04	12.88	5
		1	12	13.04	13.02	12.99	12.83	5
		1	24	12.91	12.89	12.86	12.70	5
		12	0	13.07	13.05	13.02	12.86	5
		12	6	13.04	13.02	12.99	12.83	5
		12	13	13.00	12.98	12.95	12.79	5
		25	0	12.98	12.96	12.93	12.77	5

LTE Conducted Power (ENDC)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	19.54	19.49	19.52	0
		1	50	19.50	19.40	19.43	0
		1	99	19.41	19.32	19.41	0
		50	0	18.61	18.51	18.59	1
		50	25	18.57	18.47	18.55	1
		50	50	18.50	18.40	18.44	1
		100	0	18.54	18.37	18.44	1
20M	16QAM	1	0	18.75	18.72	18.73	1
		1	50	18.70	18.51	18.61	1
		1	99	18.56	18.46	18.48	1
		50	0	17.53	17.47	17.49	2
		50	25	17.51	17.33	17.43	2
		50	50	17.47	17.39	17.43	2
		100	0	17.48	17.35	17.44	2
20M	64QAM	1	0	17.61	17.51	17.56	2
		1	50	17.57	17.49	17.51	2
		1	99	17.53	17.47	17.49	2
		50	0	16.51	16.45	16.49	3
		50	25	16.48	16.42	16.42	3
		50	50	16.43	16.34	16.35	3
		100	0	16.45	16.35	16.41	3
20M	256QAM	1	0	14.49	14.36	14.40	5
		1	50	14.47	14.37	14.42	5
		1	99	14.45	14.38	14.40	5
		50	0	14.40	14.33	14.38	5
		50	25	14.37	14.26	14.27	5
		50	50	14.35	14.25	14.29	5
		100	0	14.36	14.31	14.36	5
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	19.43	19.35	19.43	0
		1	37	19.40	19.34	19.34	0
		1	74	19.41	19.24	19.38	0
		36	0	18.55	18.47	18.58	1
		36	19	18.52	18.47	18.46	1
		36	39	18.40	18.31	18.44	1
		75	0	18.51	18.33	18.35	1
15M	16QAM	1	0	18.65	18.70	18.67	1
		1	37	18.68	18.47	18.53	1
		1	74	18.48	18.46	18.42	1
		36	0	17.47	17.37	17.42	2
		36	19	17.41	17.23	17.33	2
		36	39	17.47	17.36	17.41	2
		75	0	17.44	17.31	17.42	2
15M	64QAM	1	0	17.56	17.46	17.56	2
		1	37	17.55	17.41	17.43	2
		1	74	17.52	17.39	17.46	2
		36	0	16.47	16.35	16.40	3
		36	19	16.40	16.42	16.36	3
		36	39	16.37	16.26	16.30	3
		75	0	16.36	16.35	16.37	3
15M	256QAM	1	0	14.44	14.29	14.34	5
		1	37	14.40	14.33	14.39	5
		1	74	14.41	14.36	14.35	5
		36	0	14.40	14.27	14.28	5
		36	19	14.30	14.25	14.25	5
		36	39	14.34	14.15	14.21	5
		75	0	14.31	14.24	14.32	5

LTE Conducted Power (ENDC)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	19.44	19.36	19.47	0
		1	24	19.41	19.36	19.35	0
		1	49	19.36	19.27	19.32	0
		25	0	18.57	18.48	18.57	1
		25	12	18.49	18.43	18.45	1
		25	25	18.40	18.40	18.42	1
		50	0	18.53	18.35	18.44	1
10M	16QAM	1	0	18.72	18.65	18.63	1
		1	24	18.65	18.44	18.51	1
		1	49	18.55	18.46	18.41	1
		25	0	17.52	17.44	17.39	2
		25	12	17.47	17.30	17.36	2
		25	25	17.43	17.36	17.35	2
		50	0	17.46	17.30	17.37	2
10M	64QAM	1	0	17.52	17.48	17.48	2
		1	24	17.48	17.41	17.46	2
		1	49	17.43	17.45	17.45	2
		25	0	16.50	16.39	16.41	3
		25	12	16.47	16.37	16.35	3
		25	25	16.35	16.32	16.32	3
		50	0	16.43	16.27	16.38	3
10M	256QAM	1	0	14.42	14.30	14.33	5
		1	24	14.46	14.32	14.39	5
		1	49	14.38	14.36	14.37	5
		25	0	14.31	14.28	14.30	5
		25	12	14.31	14.18	14.17	5
		25	25	14.32	14.19	14.25	5
		50	0	14.29	14.25	14.28	5
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	19.50	19.39	19.42	0
		1	12	19.48	19.41	19.39	0
		1	24	19.32	19.26	19.38	0
		12	0	18.60	18.44	18.49	1
		12	6	18.53	18.38	18.47	1
		12	13	18.45	18.39	18.37	1
		25	0	18.44	18.28	18.36	1
5M	16QAM	1	0	18.72	18.65	18.72	1
		1	12	18.63	18.45	18.51	1
		1	24	18.51	18.37	18.38	1
		12	0	17.44	17.40	17.39	2
		12	6	17.44	17.27	17.39	2
		12	13	17.38	17.30	17.33	2
		25	0	17.45	17.32	17.34	2
5M	64QAM	1	0	17.54	17.46	17.53	2
		1	12	17.52	17.39	17.44	2
		1	24	17.43	17.45	17.47	2
		12	0	16.47	16.45	16.46	3
		12	6	16.46	16.42	16.35	3
		12	13	16.42	16.32	16.27	3
		25	0	16.39	16.28	16.32	3
5M	256QAM	1	0	14.39	14.36	14.33	5
		1	12	14.43	14.27	14.41	5
		1	24	14.36	14.32	14.33	5
		12	0	14.37	14.32	14.32	5
		12	6	14.31	14.23	14.22	5
		12	13	14.26	14.24	14.23	5
		25	0	14.36	14.31	14.30	5

LTE Conducted Power (ENDC)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	19.47	19.38	19.45	0
		1	7	19.50	19.42	19.37	0
		1	14	19.40	19.26	19.41	0
		8	0	18.52	18.43	18.59	1
		8	3	18.51	18.40	18.52	1
		8	7	18.45	18.34	18.34	1
		15	0	18.45	18.29	18.43	1
3M	16QAM	1	0	18.69	18.63	18.69	1
		1	7	18.64	18.45	18.57	1
		1	14	18.47	18.45	18.41	1
		8	0	17.50	17.39	17.49	2
		8	3	17.50	17.23	17.39	2
		8	7	17.44	17.31	17.34	2
		15	0	17.38	17.35	17.43	2
3M	64QAM	1	0	17.53	17.45	17.55	2
		1	7	17.52	17.46	17.48	2
		1	14	17.46	17.37	17.47	2
		8	0	16.42	16.35	16.44	3
		8	3	16.43	16.34	16.36	3
		8	7	16.38	16.27	16.27	3
		15	0	16.39	16.30	16.32	3
3M	256QAM	1	0	14.42	14.32	14.36	5
		1	7	14.38	14.28	14.34	5
		1	14	14.43	14.33	14.34	5
		8	0	14.32	14.32	14.36	5
		8	3	14.31	14.23	14.22	5
		8	7	14.33	14.15	14.19	5
		15	0	14.28	14.29	14.27	5
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	19.39	19.29	19.33	0
		1	2	19.37	19.42	19.38	0
		1	5	19.35	19.17	19.25	0
		3	0	19.33	19.44	19.47	0
		3	1	19.32	19.23	19.44	0
		3	3	19.39	19.30	19.28	0
		6	0	18.35	18.14	18.29	1
1.4M	16QAM	1	0	18.54	18.54	18.64	1
		1	2	18.59	18.47	18.44	1
		1	5	18.42	18.41	18.35	1
		3	0	18.35	18.29	18.35	1
		3	1	18.32	18.30	18.38	1
		3	3	18.38	18.20	18.38	1
		6	0	17.46	17.24	17.27	2
1.4M	64QAM	1	0	17.41	17.31	17.48	2
		1	2	17.44	17.40	17.28	2
		1	5	17.38	17.37	17.37	2
		3	0	17.27	17.35	17.41	2
		3	1	17.33	17.26	17.31	2
		3	3	17.25	17.25	17.30	2
		6	0	16.30	16.12	16.34	3
1.4M	256QAM	1	0	14.45	14.26	14.34	5
		1	2	14.23	14.25	14.18	5
		1	5	14.23	14.19	14.19	5
		3	0	14.27	14.23	14.27	5
		3	1	14.20	14.15	14.14	5
		3	3	14.21	14.15	14.19	5
		6	0	14.20	14.19	14.17	5

LTE Conducted Power (ENDC)							
LTE Band 71							
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	20.06	20.16	20.21	0
		1	50	20.04	20.14	20.19	0
		1	99	20.07	20.10	20.15	0
		50	0	19.24	19.26	19.37	1
		50	25	19.28	19.27	19.33	1
		50	50	19.20	19.19	19.27	1
		100	0	19.17	19.13	19.30	1
20M	16QAM	1	0	19.28	19.31	19.36	1
		1	50	19.24	19.27	19.29	1
		1	99	19.15	19.18	19.22	1
		50	0	18.32	18.28	18.43	2
		50	25	18.24	18.23	18.39	2
		50	50	18.23	18.27	18.34	2
		100	0	18.26	18.30	18.32	2
20M	64QAM	1	0	18.20	18.20	18.29	2
		1	50	18.16	18.11	18.26	2
		1	99	18.14	18.09	18.19	2
		50	0	17.19	17.16	17.34	3
		50	25	17.19	17.17	17.33	3
		50	50	17.16	17.17	17.30	3
		100	0	17.21	17.23	17.29	3
20M	256QAM	1	0	16.18	16.14	16.29	5
		1	50	16.15	16.12	16.26	5
		1	99	16.14	16.17	16.24	5
		50	0	16.14	16.18	16.23	5
		50	25	16.06	16.08	16.19	5
		50	50	16.00	15.98	16.13	5
		100	0	16.01	15.98	16.16	5
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	QPSK	1	0	20.08	20.13	20.19	0
		1	37	20.07	20.11	20.17	0
		1	74	20.05	20.12	20.09	0
		36	0	19.16	19.26	19.32	1
		36	19	19.22	19.24	19.27	1
		36	39	19.16	19.19	19.25	1
		75	0	19.08	19.19	19.29	1
15M	16QAM	1	0	19.26	19.29	19.30	1
		1	37	19.21	19.21	19.26	1
		1	74	19.10	19.12	19.16	1
		36	0	18.28	18.24	18.37	2
		36	19	18.17	18.14	18.35	2
		36	39	18.16	18.18	18.26	2
		75	0	18.22	18.22	18.27	2
15M	64QAM	1	0	18.12	18.11	18.28	2
		1	37	18.06	18.10	18.20	2
		1	74	18.08	18.09	18.09	2
		36	0	17.16	17.16	17.29	3
		36	19	17.10	17.09	17.27	3
		36	39	17.15	17.17	17.23	3
		75	0	17.12	17.19	17.23	3
15M	256QAM	1	0	16.18	16.07	16.29	5
		1	37	16.10	16.04	16.25	5
		1	74	16.11	16.08	16.23	5
		36	0	16.08	16.09	16.23	5
		36	19	15.96	16.06	16.17	5
		36	39	15.96	15.88	16.08	5
		75	0	15.98	15.97	16.14	5

LTE Conducted Power (ENDC)							
LTE Band 71							
BW	MCS Index	Channel		133172	133297	133422	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	QPSK	1	0	20.09	20.13	20.18	0
		1	24	20.08	20.11	20.16	0
		1	49	20.04	20.09	20.12	0
		25	0	19.17	19.20	19.31	1
		25	12	19.24	19.17	19.27	1
		25	25	19.14	19.09	19.19	1
		50	0	19.13	19.19	19.28	1
10M	16QAM	1	0	19.18	19.24	19.30	1
		1	24	19.15	19.26	19.23	1
		1	49	19.13	19.15	19.17	1
		25	0	18.31	18.27	18.33	2
		25	12	18.23	18.21	18.35	2
		25	25	18.19	18.21	18.31	2
		50	0	18.24	18.21	18.22	2
10M	64QAM	1	0	18.17	18.15	18.26	2
		1	24	18.13	18.13	18.25	2
		1	49	18.09	18.09	18.10	2
		25	0	17.18	17.16	17.33	3
		25	12	17.12	17.11	17.23	3
		25	25	17.13	17.15	17.26	3
		50	0	17.11	17.17	17.20	3
10M	256QAM	1	0	16.09	16.06	16.25	5
		1	24	16.06	16.07	16.21	5
		1	49	16.11	16.12	16.19	5
		25	0	16.08	16.14	16.21	5
		25	12	16.04	16.05	16.19	5
		25	25	15.94	15.97	16.13	5
		50	0	15.93	15.98	16.10	5
BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	20.05	20.15	20.16	0
		1	12	20.07	20.09	20.17	0
		1	24	20.07	20.10	20.15	0
		12	0	19.16	19.17	19.33	1
		12	6	19.18	19.20	19.30	1
		12	13	19.17	19.16	19.20	1
		25	0	19.13	19.20	19.27	1
5M	16QAM	1	0	19.28	19.26	19.32	1
		1	12	19.17	19.21	19.27	1
		1	24	19.11	19.14	19.20	1
		12	0	18.28	18.21	18.43	2
		12	6	18.22	18.14	18.29	2
		12	13	18.21	18.17	18.33	2
		25	0	18.16	18.28	18.29	2
5M	64QAM	1	0	18.13	18.14	18.28	2
		1	12	18.08	18.11	18.17	2
		1	24	18.04	18.14	18.19	2
		12	0	17.09	17.12	17.26	3
		12	6	17.15	17.14	17.27	3
		12	13	17.16	17.09	17.25	3
		25	0	17.19	17.21	17.27	3
5M	256QAM	1	0	16.18	16.06	16.23	5
		1	12	16.11	16.06	16.16	5
		1	24	16.04	16.10	16.14	5
		12	0	16.11	16.17	16.19	5
		12	6	16.03	16.01	16.12	5
		12	13	15.92	15.98	16.04	5
		25	0	15.93	15.97	16.06	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	14.96	14.98	14.99	0
		1	50	14.93	14.95	14.96	0
		1	99	14.91	14.93	14.94	0
		50	0	13.96	13.98	13.99	1
		50	25	13.92	13.94	13.95	1
		50	50	13.90	13.92	13.93	1
		100	0	13.95	13.97	13.98	1
20M	16QAM	1	0	13.91	13.94	13.93	1
		1	50	13.88	13.94	13.90	1
		1	99	13.92	13.92	13.90	1
		50	0	11.86	11.92	11.87	2
		50	25	11.86	11.88	11.89	2
		50	50	11.85	11.86	11.92	2
		100	0	11.86	11.89	11.87	2
20M	64QAM	1	0	11.88	11.87	11.92	2
		1	50	11.88	11.91	11.86	2
		1	99	11.91	11.88	11.86	2
		50	0	11.85	11.87	11.89	3
		50	25	11.90	11.89	11.90	3
		50	50	11.86	11.89	11.88	3
		100	0	11.89	11.88	11.84	3
20M	256QAM	1	0	9.86	9.85	9.88	5
		1	50	9.90	9.88	9.89	5
		1	99	9.89	9.86	9.91	5
		50	0	9.90	9.91	9.85	5
		50	25	9.87	9.88	9.88	5
		50	50	9.87	9.89	9.85	5
		100	0	9.88	9.90	9.89	5
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	14.63	14.87	14.75	0
		1	37	14.90	14.86	14.89	0
		1	74	14.82	14.84	14.88	0
		36	0	13.88	13.97	13.93	1
		36	19	13.91	13.88	13.90	1
		36	39	13.83	13.91	13.85	1
		75	0	13.90	13.91	13.91	1
15M	16QAM	1	0	13.81	13.88	13.91	1
		1	37	13.78	13.91	13.87	1
		1	74	13.87	13.91	13.86	1
		36	0	11.80	11.85	11.87	2
		36	19	11.79	11.78	11.84	2
		36	39	11.77	11.76	11.92	2
		75	0	11.82	11.81	11.77	2
15M	64QAM	1	0	11.87	11.80	11.83	2
		1	37	11.78	11.89	11.80	2
		1	74	11.91	11.87	11.76	2
		36	0	11.76	11.83	11.79	3
		36	19	11.80	11.88	11.80	3
		36	39	11.76	11.85	11.80	3
		75	0	11.85	11.87	11.82	3
15M	256QAM	1	0	9.83	9.84	9.86	5
		1	37	9.90	9.84	9.85	5
		1	74	9.80	9.85	9.90	5
		36	0	9.83	9.84	9.75	5
		36	19	9.78	9.87	9.88	5
		36	39	9.79	9.89	9.81	5
		75	0	9.85	9.84	9.84	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	14.65	14.84	14.79	0
		1	24	14.93	14.95	14.96	0
		1	49	14.90	14.88	14.85	0
		25	0	13.95	13.90	13.98	1
		25	12	13.82	13.87	13.93	1
		25	25	13.81	13.86	13.89	1
		50	0	13.88	13.94	13.93	1
10M	16QAM	1	0	13.91	13.85	13.85	1
		1	24	13.87	13.87	13.88	1
		1	49	13.84	13.85	13.81	1
		25	0	11.78	11.83	11.77	2
		25	12	11.85	11.85	11.87	2
		25	25	11.83	11.84	11.84	2
		50	0	11.82	11.88	11.82	2
10M	64QAM	1	0	11.80	11.86	11.92	2
		1	24	11.79	11.86	11.82	2
		1	49	11.86	11.85	11.85	2
		25	0	11.78	11.84	11.86	3
		25	12	11.84	11.85	11.89	3
		25	25	11.77	11.83	11.78	3
		50	0	11.87	11.81	11.77	3
10M	256QAM	1	0	9.83	9.77	9.82	5
		1	24	9.89	9.82	9.82	5
		1	49	9.85	9.78	9.89	5
		25	0	9.88	9.86	9.84	5
		25	12	9.78	9.86	9.81	5
		25	25	9.86	9.88	9.83	5
		50	0	9.86	9.86	9.84	5
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	14.62	14.83	14.78	0
		1	12	14.83	14.85	14.96	0
		1	24	14.83	14.92	14.90	0
		12	0	13.88	13.89	13.90	1
		12	6	13.90	13.90	13.86	1
		12	13	13.83	13.92	13.87	1
		25	0	13.87	13.91	13.88	1
5M	16QAM	1	0	13.83	13.84	13.84	1
		1	12	13.79	13.92	13.80	1
		1	24	13.82	13.87	13.86	1
		12	0	11.78	11.85	11.82	2
		12	6	11.76	11.79	11.81	2
		12	13	11.83	11.85	11.82	2
		25	0	11.81	11.88	11.78	2
5M	64QAM	1	0	11.88	11.81	11.83	2
		1	12	11.83	11.81	11.76	2
		1	24	11.87	11.86	11.84	2
		12	0	11.78	11.78	11.82	3
		12	6	11.81	11.86	11.88	3
		12	13	11.85	11.81	11.86	3
		25	0	11.83	11.86	11.76	3
5M	256QAM	1	0	9.76	9.81	9.87	5
		1	12	9.86	9.87	9.80	5
		1	24	9.80	9.84	9.88	5
		12	0	9.81	9.87	9.75	5
		12	6	9.83	9.83	9.86	5
		12	13	9.80	9.85	9.81	5
		25	0	9.78	9.85	9.87	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	14.62	14.79	14.82	0
		1	7	14.91	14.86	14.89	0
		1	14	14.85	14.90	14.85	0
		8	0	13.95	13.97	13.97	1
		8	3	13.92	13.90	13.87	1
		8	7	13.88	13.90	13.85	1
		15	0	13.85	13.87	13.97	1
3M	16QAM	1	0	13.84	13.88	13.89	1
		1	7	13.85	13.94	13.80	1
		1	14	13.83	13.85	13.85	1
		8	0	11.82	11.89	11.77	2
		8	3	11.80	11.81	11.86	2
		8	7	11.81	11.86	11.85	2
		15	0	11.81	11.86	11.84	2
3M	64QAM	1	0	11.87	11.86	11.86	2
		1	7	11.78	11.84	11.82	2
		1	14	11.84	11.80	11.78	2
		8	0	11.85	11.85	11.84	3
		8	3	11.80	11.87	11.88	3
		8	7	11.78	11.79	11.84	3
		15	0	11.86	11.80	11.78	3
3M	256QAM	1	0	9.79	9.77	9.82	5
		1	7	9.84	9.81	9.81	5
		1	14	9.86	9.82	9.88	5
		8	0	9.81	9.81	9.75	5
		8	3	9.87	9.86	9.80	5
		8	7	9.87	9.80	9.85	5
		15	0	9.88	9.84	9.80	5
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	14.84	14.85	14.87	0
		1	2	14.91	14.86	14.85	0
		1	5	14.85	14.91	14.86	0
		3	0	14.86	14.90	14.90	0
		3	1	14.91	14.89	14.85	0
		3	3	14.87	14.90	14.87	0
		6	0	13.83	13.89	13.85	1
1.4M	16QAM	1	0	13.84	13.82	13.86	1
		1	2	13.86	13.89	13.84	1
		1	5	13.88	13.83	13.86	1
		3	0	13.87	13.86	13.83	1
		3	1	13.89	13.82	13.85	1
		3	3	13.87	13.89	13.86	1
		6	0	12.88	12.85	12.91	2
1.4M	64QAM	1	0	12.90	12.87	12.86	2
		1	2	12.87	12.86	12.88	2
		1	5	12.90	12.88	12.88	2
		3	0	12.90	12.88	12.89	2
		3	1	12.85	12.90	12.90	2
		3	3	12.87	12.91	12.87	2
		6	0	11.91	11.94	11.95	3
1.4M	256QAM	1	0	9.88	9.88	9.88	5
		1	2	9.86	9.91	9.89	5
		1	5	9.87	9.87	9.87	5
		3	0	9.89	9.87	9.87	5
		3	1	9.87	9.85	9.90	5
		3	3	9.86	9.89	9.89	5
		6	0	9.84	9.84	9.88	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	15.99	15.97	15.98	0
		1	50	15.93	15.91	15.92	0
		1	99	15.92	15.90	15.91	0
		50	0	14.99	14.97	14.98	1
		50	25	14.95	14.93	14.94	1
		50	50	14.94	14.92	14.93	1
		100	0	14.98	14.96	14.97	1
20M	16QAM	1	0	14.85	14.89	14.85	1
		1	50	14.89	14.90	14.82	1
		1	99	14.82	14.84	14.83	1
		50	0	13.88	13.86	13.88	2
		50	25	13.84	13.86	13.85	2
		50	50	13.86	13.91	13.93	2
		100	0	13.84	13.90	13.88	2
20M	64QAM	1	0	13.90	13.85	13.85	2
		1	50	13.90	13.85	13.91	2
		1	99	13.90	13.86	13.84	2
		50	0	12.91	12.86	12.92	3
		50	25	12.92	12.92	12.90	3
		50	50	12.86	12.89	12.89	3
		100	0	12.87	12.91	12.88	3
20M	256QAM	1	0	10.92	10.88	10.89	5
		1	50	10.91	10.91	10.94	5
		1	99	10.91	10.92	10.94	5
		50	0	10.94	10.89	10.95	5
		50	25	10.95	10.94	10.88	5
		50	50	10.89	10.91	10.89	5
		100	0	10.89	10.90	10.89	5
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	15.98	15.95	15.95	0
		1	37	15.93	15.90	15.83	0
		1	74	15.82	15.85	15.86	0
		36	0	14.98	14.93	14.99	1
		36	19	14.95	14.83	14.85	1
		36	39	14.93	14.89	14.84	1
		75	0	14.97	14.88	14.95	1
15M	16QAM	1	0	14.83	14.79	14.77	1
		1	37	14.88	14.81	14.82	1
		1	74	14.73	14.84	14.79	1
		36	0	13.82	13.81	13.78	2
		36	19	13.83	13.79	13.79	2
		36	39	13.82	13.90	13.91	2
		75	0	13.79	13.86	13.86	2
15M	64QAM	1	0	13.90	13.75	13.82	2
		1	37	13.89	13.82	13.83	2
		1	74	13.85	13.81	13.76	2
		36	0	12.81	12.77	12.88	3
		36	19	12.86	12.89	12.87	3
		36	39	12.79	12.84	12.87	3
		75	0	12.78	12.81	12.80	3
15M	256QAM	1	0	10.90	10.78	10.89	5
		1	37	10.86	10.83	10.87	5
		1	74	10.87	10.88	10.94	5
		36	0	10.86	10.86	10.94	5
		36	19	10.86	10.91	10.83	5
		36	39	10.86	10.81	10.81	5
		75	0	10.84	10.87	10.79	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	15.95	15.95	15.87	0
		1	24	15.85	15.91	15.90	0
		1	49	15.83	15.83	15.82	0
		25	0	14.96	14.90	14.93	1
		25	12	14.90	14.89	14.81	1
		25	25	14.93	14.90	14.85	1
		50	0	14.95	14.96	14.93	1
10M	16QAM	1	0	14.81	14.80	14.78	1
		1	24	14.88	14.88	14.78	1
		1	49	14.75	14.80	14.76	1
		25	0	13.86	13.81	13.80	2
		25	12	13.78	13.84	13.80	2
		25	25	13.77	13.83	13.88	2
		50	0	13.76	13.80	13.85	2
10M	64QAM	1	0	13.81	13.84	13.80	2
		1	24	13.80	13.75	13.89	2
		1	49	13.86	13.78	13.84	2
		25	0	12.82	12.85	12.86	3
		25	12	12.92	12.89	12.83	3
		25	25	12.82	12.84	12.85	3
		50	0	12.80	12.87	12.83	3
10M	256QAM	1	0	10.85	10.80	10.81	5
		1	24	10.83	10.91	10.84	5
		1	49	10.85	10.86	10.91	5
		25	0	10.89	10.85	10.86	5
		25	12	10.95	10.85	10.85	5
		25	25	10.85	10.83	10.84	5
		50	0	10.83	10.85	10.89	5
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	15.94	15.94	15.96	0
		1	12	15.89	15.82	15.87	0
		1	24	15.84	15.87	15.81	0
		12	0	14.98	14.97	14.97	1
		12	6	14.87	14.86	14.81	1
		12	13	14.86	14.82	14.85	1
		25	0	14.96	14.96	14.91	1
5M	16QAM	1	0	14.79	14.86	14.85	1
		1	12	14.81	14.86	14.75	1
		1	24	14.80	14.83	14.83	1
		12	0	13.79	13.76	13.81	2
		12	6	13.84	13.86	13.80	2
		12	13	13.85	13.82	13.86	2
		25	0	13.82	13.80	13.87	2
5M	64QAM	1	0	13.82	13.79	13.78	2
		1	12	13.89	13.80	13.87	2
		1	24	13.82	13.77	13.80	2
		12	0	12.88	12.85	12.88	3
		12	6	12.89	12.84	12.82	3
		12	13	12.79	12.79	12.84	3
		25	0	12.80	12.87	12.86	3
5M	256QAM	1	0	10.90	10.81	10.85	5
		1	12	10.86	10.84	10.87	5
		1	24	10.84	10.86	10.90	5
		12	0	10.94	10.86	10.89	5
		12	6	10.90	10.87	10.86	5
		12	13	10.87	10.87	10.84	5
		25	0	10.83	10.86	10.81	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	15.91	15.93	15.87	0
		1	7	15.84	15.88	15.89	0
		1	14	15.86	15.89	15.82	0
		8	0	14.94	14.93	14.91	1
		8	3	14.92	14.86	14.83	1
		8	7	14.86	14.82	14.85	1
		15	0	14.97	14.86	14.95	1
3M	16QAM	1	0	14.76	14.86	14.83	1
		1	7	14.84	14.81	14.75	1
		1	14	14.81	14.76	14.73	1
		8	0	13.78	13.82	13.86	2
		8	3	13.84	13.84	13.76	2
		8	7	13.86	13.86	13.89	2
		15	0	13.79	13.87	13.86	2
3M	64QAM	1	0	13.89	13.83	13.81	2
		1	7	13.83	13.85	13.91	2
		1	14	13.88	13.77	13.78	2
		8	0	12.81	12.84	12.86	3
		8	3	12.83	12.82	12.84	3
		8	7	12.81	12.83	12.79	3
		15	0	12.84	12.86	12.88	3
3M	256QAM	1	0	10.84	10.87	10.81	5
		1	7	10.88	10.82	10.94	5
		1	14	10.85	10.85	10.87	5
		8	0	10.91	10.88	10.85	5
		8	3	10.90	10.87	10.85	5
		8	7	10.82	10.89	10.80	5
		15	0	10.79	10.88	10.84	5
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	15.91	15.84	15.86	0
		1	2	15.89	15.88	15.84	0
		1	5	15.85	15.89	15.87	0
		3	0	15.89	15.89	15.87	0
		3	1	15.89	15.86	15.90	0
		3	3	15.84	15.89	15.85	0
		6	0	14.86	14.86	14.82	1
1.4M	16QAM	1	0	14.87	14.84	14.89	1
		1	2	14.88	14.88	14.86	1
		1	5	14.83	14.86	14.86	1
		3	0	14.84	14.89	14.84	1
		3	1	14.89	14.87	14.84	1
		3	3	14.82	14.86	14.86	1
		6	0	13.91	13.87	13.90	2
1.4M	64QAM	1	0	13.91	13.91	13.91	2
		1	2	13.89	13.87	13.88	2
		1	5	13.87	13.91	13.86	2
		3	0	13.91	13.91	13.88	2
		3	1	13.89	13.84	13.90	2
		3	3	13.85	13.85	13.89	2
		6	0	12.89	12.92	12.88	3
1.4M	256QAM	1	0	10.84	10.85	10.81	5
		1	2	10.84	10.81	10.82	5
		1	5	10.82	10.84	10.85	5
		3	0	10.83	10.88	10.81	5
		3	1	10.87	10.86	10.83	5
		3	3	10.81	10.82	10.81	5
		6	0	10.81	10.82	10.84	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	16.99	16.97	16.95	0
		1	24	16.94	16.92	16.90	0
		1	49	16.92	16.90	16.88	0
		25	0	15.99	15.97	15.95	1
		25	12	15.97	15.95	15.93	1
		25	25	15.96	15.94	15.92	1
		50	0	15.98	15.96	15.94	1
10M	16QAM	1	0	15.84	15.92	15.86	1
		1	24	15.84	15.88	15.86	1
		1	49	15.83	15.82	15.84	1
		25	0	14.85	14.88	14.87	2
		25	12	14.91	14.83	14.88	2
		25	25	14.84	14.92	14.87	2
		50	0	14.84	14.91	14.89	2
10M	64QAM	1	0	14.86	14.90	14.84	2
		1	24	14.89	14.84	14.92	2
		1	49	14.88	14.84	14.83	2
		25	0	13.83	13.85	13.90	3
		25	12	13.87	13.83	13.82	3
		25	25	13.84	13.82	13.84	3
		50	0	13.92	13.89	13.91	3
10M	256QAM	1	0	11.87	11.88	11.72	5
		1	24	11.83	11.81	11.77	5
		1	49	11.82	11.81	11.80	5
		25	0	11.82	11.80	11.74	5
		25	12	11.90	11.81	11.76	5
		25	25	11.82	11.82	11.88	5
		50	0	11.83	11.85	11.78	5
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	16.89	16.88	16.88	0
		1	12	16.87	16.89	16.85	0
		1	24	16.84	16.88	16.78	0
		12	0	15.90	15.90	15.95	1
		12	6	15.93	15.88	15.87	1
		12	13	15.88	15.89	15.85	1
		25	0	15.97	15.94	15.86	1
5M	16QAM	1	0	15.74	15.83	15.79	1
		1	12	15.74	15.80	15.80	1
		1	24	15.79	15.77	15.74	1
		12	0	14.78	14.79	14.87	2
		12	6	14.91	14.80	14.82	2
		12	13	14.78	14.83	14.79	2
		25	0	14.79	14.83	14.87	2
5M	64QAM	1	0	14.78	14.87	14.84	2
		1	12	14.89	14.76	14.83	2
		1	24	14.80	14.81	14.79	2
		12	0	13.82	13.77	13.83	3
		12	6	13.86	13.80	13.75	3
		12	13	13.81	13.80	13.77	3
		25	0	13.91	13.85	13.88	3
5M	256QAM	1	0	11.90	11.87	11.73	5
		1	12	11.85	11.90	11.83	5
		1	24	11.81	11.78	11.83	5
		12	0	11.74	11.86	11.79	5
		12	6	11.81	11.78	11.82	5
		12	13	11.82	11.79	11.86	5
		25	0	11.83	11.83	11.81	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 5							
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	16.86	16.93	16.91	0
		1	7	16.71	16.78	16.82	0
		1	14	16.74	16.76	16.79	0
		8	0	15.77	15.83	15.85	1
		8	3	15.82	15.83	15.80	1
		8	7	15.73	15.83	15.82	1
		15	0	15.87	15.85	15.90	1
3M	16QAM	1	0	15.71	15.82	15.79	1
		1	7	15.80	15.73	15.66	1
		1	14	15.78	15.70	15.80	1
		8	0	14.80	14.73	14.74	2
		8	3	14.74	14.69	14.72	2
		8	7	14.72	14.69	14.82	2
		15	0	14.67	14.77	14.72	2
3M	64QAM	1	0	14.70	14.84	14.71	2
		1	7	14.74	14.72	14.79	2
		1	14	14.75	14.79	14.68	2
		8	0	13.66	13.69	13.78	3
		8	3	13.70	13.69	13.70	3
		8	7	13.71	13.72	13.73	3
		15	0	13.69	13.79	13.75	3
3M	256QAM	1	0	11.92	11.91	11.82	5
		1	7	11.85	11.91	11.87	5
		1	14	11.82	11.86	11.83	5
		8	0	11.83	11.86	11.84	5
		8	3	11.91	11.83	11.83	5
		8	7	11.84	11.89	11.90	5
		15	0	11.86	11.89	11.87	5
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	16.85	16.91	16.87	0
		1	2	16.82	16.83	16.86	0
		1	5	16.91	16.83	16.82	0
		3	0	16.85	16.90	16.81	0
		3	1	16.81	16.82	16.82	0
		3	3	16.86	16.89	16.89	0
		6	0	15.84	15.81	15.84	1
1.4M	16QAM	1	0	15.81	15.91	15.83	1
		1	2	15.87	15.87	15.81	1
		1	5	15.85	15.91	15.83	1
		3	0	15.87	15.91	15.82	1
		3	1	15.91	15.85	15.89	1
		3	3	15.89	15.90	15.87	1
		6	0	14.91	14.91	14.89	2
1.4M	64QAM	1	0	14.88	14.88	14.88	2
		1	2	14.86	14.88	14.87	2
		1	5	14.82	14.87	14.89	2
		3	0	14.92	14.85	14.82	2
		3	1	14.84	14.88	14.91	2
		3	3	14.89	14.85	14.91	2
		6	0	13.91	13.85	13.87	3
1.4M	256QAM	1	0	11.87	11.82	11.85	5
		1	2	11.85	11.86	11.89	5
		1	5	11.84	11.92	11.84	5
		3	0	11.89	11.91	11.84	5
		3	1	11.87	11.87	11.90	5
		3	3	11.90	11.86	11.89	5
		6	0	11.84	11.89	11.91	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	12.97	12.93	13.04	0
		1	50	12.96	12.92	13.03	0
		1	99	12.92	12.88	12.99	0
		50	0	12.07	12.03	12.14	1
		50	25	12.02	11.98	12.09	1
		50	50	12.00	11.96	12.07	1
		100	0	11.99	11.95	12.06	1
20M	16QAM	1	0	11.95	12.03	12.05	1
		1	50	12.05	11.99	12.02	1
		1	99	12.05	11.98	11.96	1
		50	0	10.98	10.99	10.98	2
		50	25	11.00	11.04	11.07	2
		50	50	11.07	10.98	10.99	2
		100	0	11.02	11.02	11.05	2
20M	64QAM	1	0	11.04	11.07	11.07	2
		1	50	10.98	10.97	11.05	2
		1	99	11.01	10.97	11.00	2
		50	0	9.97	10.02	9.95	3
		50	25	10.02	10.01	9.95	3
		50	50	9.97	9.99	10.02	3
		100	0	9.94	9.99	10.02	3
20M	256QAM	1	0	7.98	8.01	7.95	5
		1	50	8.02	7.92	8.00	5
		1	99	7.95	7.95	8.00	5
		50	0	8.02	7.94	7.97	5
		50	25	7.95	7.94	7.92	5
		50	50	7.92	8.00	7.96	5
		100	0	7.92	8.00	7.98	5
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	12.97	12.86	12.96	0
		1	37	12.92	12.86	12.93	0
		1	74	12.87	12.88	12.91	0
		36	0	12.01	11.94	12.13	1
		36	19	11.94	11.88	12.00	1
		36	39	11.90	11.93	11.97	1
		75	0	11.95	11.87	12.00	1
15M	16QAM	1	0	12.04	11.99	11.96	1
		1	37	12.04	11.98	12.03	1
		1	74	11.97	11.96	12.03	1
		36	0	10.97	11.01	11.05	2
		36	19	11.06	11.01	11.05	2
		36	39	11.05	11.01	11.00	2
		75	0	11.05	11.02	11.00	2
15M	64QAM	1	0	11.02	10.98	11.00	2
		1	37	10.97	10.99	10.98	2
		1	74	11.03	11.05	11.04	2
		36	0	9.97	9.94	9.94	3
		36	19	9.93	10.00	9.93	3
		36	39	9.97	9.99	9.95	3
		75	0	9.93	10.01	9.96	3
15M	256QAM	1	0	7.95	7.92	7.87	5
		1	37	8.01	7.84	7.94	5
		1	74	7.85	7.89	7.97	5
		36	0	8.00	7.88	7.91	5
		36	19	7.86	7.84	7.92	5
		36	39	7.88	7.99	7.88	5
		75	0	7.84	7.92	7.88	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	12.94	12.81	12.90	0
		1	24	12.82	12.83	12.91	0
		1	49	12.80	12.82	12.82	0
		25	0	11.92	11.93	12.10	1
		25	12	11.92	11.80	11.90	1
		25	25	11.75	11.80	11.83	1
		50	0	11.90	11.79	11.93	1
10M	16QAM	1	0	11.99	11.93	11.83	1
		1	24	11.89	11.92	11.92	1
		1	49	11.93	11.94	11.92	1
		25	0	10.89	10.93	10.94	2
		25	12	10.93	10.97	10.94	2
		25	25	10.97	10.88	10.89	2
		50	0	11.05	10.87	10.92	2
10M	64QAM	1	0	10.96	10.92	10.93	2
		1	24	10.95	10.90	10.87	2
		1	49	11.01	10.97	10.90	2
		25	0	9.92	9.89	9.82	3
		25	12	9.81	9.98	9.78	3
		25	25	9.91	9.99	9.81	3
		50	0	9.88	9.91	9.91	3
10M	256QAM	1	0	7.92	7.94	7.88	5
		1	24	7.98	7.82	7.98	5
		1	49	7.88	7.93	7.93	5
		25	0	7.96	7.92	7.94	5
		25	12	7.86	7.92	7.83	5
		25	25	7.92	7.99	7.93	5
		50	0	7.92	7.91	7.97	5
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	12.85	12.72	12.91	0
		1	12	12.89	12.81	12.74	0
		1	24	12.83	12.87	12.70	0
		12	0	11.97	11.85	12.02	1
		12	6	11.86	11.75	11.87	1
		12	13	11.81	11.89	11.91	1
		25	0	11.86	11.84	11.91	1
5M	16QAM	1	0	12.01	11.84	11.87	1
		1	12	12.00	11.88	12.00	1
		1	24	11.93	11.83	11.88	1
		12	0	10.97	10.89	11.02	2
		12	6	10.98	10.98	10.97	2
		12	13	10.91	10.92	10.96	2
		25	0	10.92	10.96	10.90	2
5M	64QAM	1	0	11.02	10.85	10.96	2
		1	12	10.95	10.85	10.95	2
		1	24	10.93	10.93	10.91	2
		12	0	9.96	9.93	9.90	3
		12	6	9.79	9.92	9.78	3
		12	13	9.91	9.99	9.82	3
		25	0	9.90	9.94	9.90	3
5M	256QAM	1	0	7.98	7.98	7.93	5
		1	12	7.92	7.89	7.97	5
		1	24	7.94	7.94	7.95	5
		12	0	7.97	7.86	7.94	5
		12	6	7.85	7.84	7.85	5
		12	13	7.84	7.98	7.94	5
		25	0	7.82	7.93	7.98	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	19.83	19.73	19.75	0
		1	24	19.81	19.71	19.73	0
		1	49	19.78	19.68	19.70	0
		25	0	18.79	18.69	18.71	1
		25	12	18.75	18.65	18.67	1
		25	25	18.73	18.63	18.65	1
		50	0	18.66	18.56	18.58	1
10M	16QAM	1	0	18.56	18.65	18.62	1
		1	24	18.61	18.64	18.59	1
		1	49	18.59	18.61	18.59	1
		25	0	17.64	17.66	17.56	2
		25	12	17.58	17.62	17.57	2
		25	25	17.57	17.61	17.66	2
		50	0	17.58	17.66	17.58	2
10M	64QAM	1	0	17.66	17.65	17.61	2
		1	24	17.66	17.66	17.66	2
		1	49	17.61	17.57	17.57	2
		25	0	16.54	16.55	16.59	3
		25	12	16.51	16.52	16.60	3
		25	25	16.55	16.58	16.51	3
		50	0	16.59	16.61	16.56	3
10M	256QAM	1	0	14.69	14.68	14.68	5
		1	24	14.68	14.68	14.67	5
		1	49	14.65	14.70	14.72	5
		25	0	14.70	14.67	14.66	5
		25	12	14.72	14.71	14.68	5
		25	25	14.63	14.64	14.64	5
		50	0	14.66	14.64	14.66	5
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	19.73	19.64	19.68	0
		1	12	19.73	19.67	19.64	0
		1	24	19.76	19.59	19.67	0
		12	0	18.78	18.67	18.68	1
		12	6	18.74	18.56	18.62	1
		12	13	18.63	18.56	18.64	1
		25	0	18.60	18.51	18.52	1
5M	16QAM	1	0	18.63	18.63	18.63	1
		1	12	18.56	18.64	18.65	1
		1	24	18.55	18.55	18.56	1
		12	0	17.58	17.65	17.62	2
		12	6	17.58	17.61	17.62	2
		12	13	17.56	17.59	17.56	2
		25	0	17.59	17.58	17.61	2
5M	64QAM	1	0	17.66	17.58	17.66	2
		1	12	17.60	17.57	17.61	2
		1	24	17.65	17.61	17.61	2
		12	0	16.55	16.58	16.59	3
		12	6	16.59	16.54	16.59	3
		12	13	16.56	16.55	16.52	3
		25	0	16.59	16.57	16.51	3
5M	256QAM	1	0	14.70	14.71	14.64	5
		1	12	14.65	14.70	14.71	5
		1	24	14.70	14.71	14.67	5
		12	0	14.67	14.65	14.66	5
		12	6	14.68	14.63	14.67	5
		12	13	14.66	14.68	14.72	5
		25	0	14.67	14.68	14.73	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 12							
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		700.5	707.5	714.5	
3M	QPSK	1	0	19.72	19.55	19.67	0
		1	7	19.65	19.52	19.55	0
		1	14	19.66	19.59	19.62	0
		8	0	18.63	18.59	18.68	1
		8	3	18.67	18.54	18.61	1
		8	7	18.60	18.42	18.56	1
		15	0	18.57	18.44	18.38	1
3M	16QAM	1	0	18.55	18.57	18.61	1
		1	7	18.56	18.56	18.50	1
		1	14	18.46	18.47	18.49	1
		8	0	17.58	17.65	17.54	2
		8	3	17.49	17.48	17.47	2
		8	7	17.45	17.54	17.54	2
		15	0	17.50	17.46	17.46	2
3M	64QAM	1	0	17.56	17.56	17.60	2
		1	7	17.60	17.51	17.49	2
		1	14	17.63	17.61	17.56	2
		8	0	16.40	16.44	16.51	3
		8	3	16.54	16.51	16.51	3
		8	7	16.53	16.40	16.45	3
		15	0	16.47	16.52	16.46	3
3M	256QAM	1	0	14.68	14.71	14.59	5
		1	7	14.59	14.68	14.70	5
		1	14	14.69	14.67	14.64	5
		8	0	14.65	14.59	14.58	5
		8	3	14.61	14.53	14.61	5
		8	7	14.64	14.65	14.69	5
		15	0	14.60	14.58	14.73	5
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	19.55	19.62	19.49	0
		1	2	19.59	19.63	19.65	0
		1	5	19.52	19.60	19.68	0
		3	0	19.64	19.56	19.58	0
		3	1	19.48	19.47	19.49	0
		3	3	19.61	19.60	19.52	0
		6	0	18.48	18.62	18.57	1
1.4M	16QAM	1	0	18.51	18.51	18.50	1
		1	2	18.53	18.66	18.50	1
		1	5	18.56	18.47	18.61	1
		3	0	18.60	18.54	18.53	1
		3	1	18.57	18.53	18.62	1
		3	3	18.51	18.55	18.53	1
		6	0	17.48	17.47	17.54	2
1.4M	64QAM	1	0	17.50	17.44	17.44	2
		1	2	17.41	17.52	17.59	2
		1	5	17.53	17.55	17.48	2
		3	0	17.56	17.51	17.48	2
		3	1	17.49	17.58	17.50	2
		3	3	17.41	17.57	17.47	2
		6	0	16.42	16.31	16.33	3
1.4M	256QAM	1	0	14.58	14.64	14.68	5
		1	2	14.66	14.61	14.60	5
		1	5	14.64	14.59	14.63	5
		3	0	14.59	14.62	14.69	5
		3	1	14.70	14.64	14.64	5
		3	3	14.62	14.62	14.59	5
		6	0	14.61	14.60	14.67	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		19.05		0
		1	24		19.04		0
		1	49		19.01		0
		25	0		18.02		1
		25	12		17.98		1
		25	25		17.96		1
		50	0		17.97		1
10M	16QAM	1	0		17.93		1
		1	24		17.96		1
		1	49		17.89		1
		25	0		16.98		2
		25	12		16.98		2
		25	25		16.92		2
		50	0		16.90		2
10M	64QAM	1	0		16.96		2
		1	24		16.89		2
		1	49		16.88		2
		25	0		15.89		3
		25	12		15.92		3
		25	25		15.88		3
		50	0		15.93		3
10M	256QAM	1	0		14.01		5
		1	24		14.06		5
		1	49		14.01		5
		25	0		14.06		5
		25	12		14.01		5
		25	25		14.08		5
		50	0		13.99		5
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	18.90	18.84	18.98	0
		1	12	18.93	18.87	18.87	0
		1	24	18.93	18.89	18.96	0
		12	0	17.84	17.87	17.98	1
		12	6	17.78	17.80	17.89	1
		12	13	17.84	17.72	17.84	1
		25	0	17.81	17.82	17.82	1
5M	16QAM	1	0	17.89	17.90	17.78	1
		1	12	17.73	17.92	17.79	1
		1	24	17.80	17.85	17.80	1
		12	0	16.94	16.83	16.77	2
		12	6	16.80	16.96	16.85	2
		12	13	16.87	16.80	16.85	2
		25	0	16.75	16.76	16.78	2
5M	64QAM	1	0	16.89	16.87	16.81	2
		1	12	16.91	16.79	16.96	2
		1	24	16.86	16.87	16.80	2
		12	0	15.94	15.88	15.77	3
		12	6	15.84	15.91	15.94	3
		12	13	15.86	15.82	15.83	3
		25	0	15.82	15.85	15.87	3
5M	256QAM	1	0	14.03	14.00	13.97	5
		1	12	13.90	13.98	13.98	5
		1	24	14.02	13.92	14.00	5
		12	0	13.96	14.01	13.98	5
		12	6	14.00	13.98	14.06	5
		12	13	13.99	14.00	13.96	5
		25	0	13.97	13.91	13.95	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		19.45		0
		1	24		19.42		0
		1	49		19.40		0
		25	0		18.37		1
		25	12		18.34		1
		25	25		18.31		1
		50	0		18.36		1
10M	16QAM	1	0		18.30		1
		1	24		18.29		1
		1	49		18.30		1
		25	0		17.28		2
		25	12		17.29		2
		25	25		17.25		2
		50	0		17.23		2
10M	64QAM	1	0		17.29		2
		1	24		17.28		2
		1	49		17.25		2
		25	0		16.23		3
		25	12		16.20		3
		25	25		16.21		3
		50	0		16.24		3
10M	256QAM	1	0		14.30		5
		1	24		14.29		5
		1	49		14.32		5
		25	0		14.36		5
		25	12		14.29		5
		25	25		14.32		5
		50	0		14.31		5
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	19.36	19.36	19.41	0
		1	12	19.23	19.24	19.26	0
		1	24	19.34	19.21	19.28	0
		12	0	18.31	18.24	18.31	1
		12	6	18.21	18.20	18.17	1
		12	13	18.13	18.13	18.19	1
		25	0	18.27	18.15	18.14	1
5M	16QAM	1	0	18.26	18.31	18.18	1
		1	12	18.21	18.25	18.12	1
		1	24	18.25	18.20	18.16	1
		12	0	17.17	17.16	17.24	2
		12	6	17.16	17.18	17.12	2
		12	13	17.13	17.29	17.22	2
		25	0	17.19	17.30	17.14	2
5M	64QAM	1	0	17.26	17.14	17.18	2
		1	12	17.15	17.20	17.27	2
		1	24	17.10	17.25	17.15	2
		12	0	16.14	16.16	16.20	3
		12	6	16.06	16.18	16.17	3
		12	13	16.09	16.22	16.10	3
		25	0	16.20	16.19	16.06	3
5M	256QAM	1	0	14.20	14.20	14.30	5
		1	12	14.18	14.20	14.22	5
		1	24	14.27	14.24	14.29	5
		12	0	14.23	14.35	14.27	5
		12	6	14.32	14.21	14.23	5
		12	13	14.22	14.23	14.28	5
		25	0	14.26	14.23	14.26	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	19.83	19.77	19.76	0
		1	24	19.81	19.75	19.74	0
		1	49	19.75	19.69	19.68	0
		25	0	18.64	18.58	18.57	1
		25	12	18.59	18.53	18.52	1
		25	25	18.56	18.50	18.49	1
		50	0	18.62	18.56	18.55	1
10M	16QAM	1	0	18.54	18.52	18.49	1
		1	24	18.47	18.54	18.47	1
		1	49	18.49	18.55	18.48	1
		25	0	17.43	17.49	17.47	2
		25	12	17.45	17.46	17.49	2
		25	25	17.48	17.52	17.47	2
		50	0	17.45	17.49	17.48	2
10M	64QAM	1	0	17.44	17.44	17.49	2
		1	24	17.49	17.50	17.42	2
		1	49	17.52	17.46	17.47	2
		25	0	16.50	16.46	16.53	3
		25	12	16.43	16.50	16.53	3
		25	25	16.49	16.51	16.46	3
		50	0	16.46	16.49	16.47	3
10M	256QAM	1	0	14.74	14.73	14.74	5
		1	24	14.69	14.69	14.75	5
		1	49	14.68	14.72	14.73	5
		25	0	14.73	14.70	14.71	5
		25	12	14.75	14.71	14.73	5
		25	25	14.74	14.68	14.70	5
		50	0	14.66	14.75	14.75	5
BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	
5M	QPSK	1	0	19.74	19.66	19.66	0
		1	12	19.75	19.67	19.73	0
		1	24	19.67	19.60	19.66	0
		12	0	18.52	18.35	18.48	1
		12	6	18.41	18.40	18.50	1
		12	13	18.31	18.33	18.42	1
		25	0	18.54	18.42	18.40	1
5M	16QAM	1	0	18.42	18.38	18.48	1
		1	12	18.32	18.41	18.38	1
		1	24	18.42	18.46	18.40	1
		12	0	17.38	17.40	17.47	2
		12	6	17.41	17.46	17.45	2
		12	13	17.44	17.44	17.37	2
		25	0	17.38	17.47	17.47	2
5M	64QAM	1	0	17.43	17.35	17.38	2
		1	12	17.49	17.41	17.37	2
		1	24	17.40	17.40	17.33	2
		12	0	16.38	16.35	16.43	3
		12	6	16.34	16.47	16.50	3
		12	13	16.46	16.49	16.39	3
		25	0	16.34	16.48	16.32	3
5M	256QAM	1	0	14.70	14.64	14.64	5
		1	12	14.66	14.60	14.73	5
		1	24	14.65	14.69	14.69	5
		12	0	14.69	14.63	14.64	5
		12	6	14.68	14.68	14.70	5
		12	13	14.64	14.67	14.70	5
		25	0	14.66	14.69	14.65	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	13.91	14.02	14.14	0
		1	50	13.89	14.00	14.12	0
		1	99	13.86	13.97	14.09	0
		50	0	12.83	12.94	13.06	1
		50	25	12.81	12.92	13.04	1
		50	50	12.78	12.89	13.01	1
		100	0	12.80	12.91	13.03	1
20M	16QAM	1	0	12.82	12.87	12.90	1
		1	50	12.84	12.83	12.92	1
		1	99	12.86	12.85	12.84	1
		50	0	11.84	11.85	11.85	2
		50	25	11.92	11.87	11.84	2
		50	50	11.93	11.87	11.87	2
		100	0	11.87	11.86	11.92	2
20M	64QAM	1	0	11.91	11.86	11.87	2
		1	50	11.83	11.91	11.91	2
		1	99	11.93	11.85	11.88	2
		50	0	10.89	10.87	10.88	3
		50	25	10.83	10.90	10.90	3
		50	50	10.83	10.91	10.84	3
		100	0	10.81	10.84	10.81	3
20M	256QAM	1	0	8.89	8.94	8.96	5
		1	50	8.91	8.90	8.89	5
		1	99	8.96	8.93	8.94	5
		50	0	8.96	8.90	8.94	5
		50	25	8.89	8.99	8.93	5
		50	50	8.92	8.95	8.89	5
		100	0	8.90	8.89	8.95	5
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	13.87	13.91	14.04	0
		1	37	13.80	13.99	13.97	0
		1	74	13.71	13.84	14.00	0
		36	0	12.72	12.79	12.95	1
		36	19	12.66	12.74	12.87	1
		36	39	12.57	12.70	12.77	1
		75	0	12.72	12.79	12.94	1
15M	16QAM	1	0	12.69	12.76	12.76	1
		1	37	12.77	12.83	12.88	1
		1	74	12.85	12.82	12.84	1
		36	0	11.73	11.70	11.85	2
		36	19	11.77	11.82	11.76	2
		36	39	11.79	11.77	11.87	2
		75	0	11.74	11.79	11.86	2
15M	64QAM	1	0	11.85	11.77	11.85	2
		1	37	11.79	11.86	11.81	2
		1	74	11.89	11.77	11.87	2
		36	0	10.85	10.77	10.85	3
		36	19	10.74	10.83	10.77	3
		36	39	10.73	10.76	10.69	3
		75	0	10.68	10.77	10.71	3
15M	256QAM	1	0	8.85	8.90	8.91	5
		1	37	8.87	8.85	8.81	5
		1	74	8.88	8.89	8.91	5
		36	0	8.93	8.80	8.91	5
		36	19	8.89	8.92	8.91	5
		36	39	8.89	8.92	8.89	5
		75	0	8.84	8.89	8.92	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	13.88	13.89	13.92	0
		1	24	13.88	13.86	13.92	0
		1	49	13.74	13.80	13.90	0
		25	0	12.73	12.85	12.86	1
		25	12	12.79	12.73	12.79	1
		25	25	12.58	12.74	12.77	1
		50	0	12.75	12.68	12.91	1
10M	16QAM	1	0	12.72	12.77	12.81	1
		1	24	12.76	12.72	12.89	1
		1	49	12.73	12.77	12.69	1
		25	0	11.76	11.85	11.85	2
		25	12	11.88	11.72	11.84	2
		25	25	11.88	11.79	11.76	2
		50	0	11.84	11.85	11.85	2
10M	64QAM	1	0	11.79	11.85	11.79	2
		1	24	11.68	11.77	11.89	2
		1	49	11.92	11.80	11.85	2
		25	0	10.87	10.86	10.78	3
		25	12	10.78	10.87	10.75	3
		25	25	10.83	10.76	10.73	3
		50	0	10.73	10.77	10.66	3
10M	256QAM	1	0	8.84	8.92	8.95	5
		1	24	8.88	8.80	8.89	5
		1	49	8.93	8.90	8.93	5
		25	0	8.96	8.80	8.85	5
		25	12	8.87	8.98	8.93	5
		25	25	8.92	8.91	8.83	5
		50	0	8.82	8.85	8.94	5
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	13.77	13.93	13.97	0
		1	12	13.80	13.99	14.08	0
		1	24	13.70	13.90	13.90	0
		12	0	12.76	12.88	12.98	1
		12	6	12.79	12.73	12.87	1
		12	13	12.67	12.79	12.85	1
		25	0	12.66	12.81	12.90	1
5M	16QAM	1	0	12.71	12.80	12.84	1
		1	12	12.79	12.77	12.84	1
		1	24	12.72	12.85	12.74	1
		12	0	11.78	11.70	11.78	2
		12	6	11.78	11.81	11.84	2
		12	13	11.81	11.87	11.84	2
		25	0	11.79	11.83	11.82	2
5M	64QAM	1	0	11.77	11.73	11.80	2
		1	12	11.83	11.84	11.86	2
		1	24	11.83	11.76	11.85	2
		12	0	10.88	10.79	10.80	3
		12	6	10.81	10.81	10.76	3
		12	13	10.71	10.91	10.84	3
		25	0	10.78	10.80	10.66	3
5M	256QAM	1	0	8.86	8.94	8.92	5
		1	12	8.84	8.85	8.83	5
		1	24	8.92	8.89	8.85	5
		12	0	8.94	8.86	8.90	5
		12	6	8.87	8.95	8.87	5
		12	13	8.83	8.88	8.86	5
		25	0	8.82	8.84	8.85	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	13.90	13.81	13.97	0
		1	7	13.79	13.99	13.77	0
		1	14	13.65	13.94	13.93	0
		8	0	12.62	12.84	12.81	1
		8	3	12.78	12.89	12.82	1
		8	7	12.57	12.71	12.87	1
		15	0	12.66	12.80	12.85	1
3M	16QAM	1	0	12.61	12.82	12.69	1
		1	7	12.79	12.69	12.88	1
		1	14	12.65	12.66	12.77	1
		8	0	11.63	11.69	11.66	2
		8	3	11.76	11.83	11.70	2
		8	7	11.90	11.85	11.81	2
		15	0	11.72	11.78	11.73	2
3M	64QAM	1	0	11.76	11.61	11.70	2
		1	7	11.65	11.81	11.72	2
		1	14	11.78	11.69	11.72	2
		8	0	10.77	10.73	10.78	3
		8	3	10.61	10.78	10.72	3
		8	7	10.82	10.68	10.70	3
		15	0	10.64	10.64	10.72	3
3M	256QAM	1	0	8.83	8.85	8.93	5
		1	7	8.88	8.87	8.97	5
		1	14	8.89	8.88	8.85	5
		8	0	8.82	8.87	8.85	5
		8	3	8.92	8.82	8.87	5
		8	7	8.94	8.86	8.87	5
		15	0	8.95	8.91	8.88	5
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	13.83	13.72	13.70	0
		1	2	13.73	13.76	13.73	0
		1	5	13.79	13.79	13.76	0
		3	0	13.81	13.83	13.71	0
		3	1	13.80	13.73	13.72	0
		3	3	13.69	13.79	13.74	0
		6	0	12.83	12.76	12.70	1
1.4M	16QAM	1	0	12.67	12.75	12.73	1
		1	2	12.71	12.72	12.71	1
		1	5	12.83	12.66	12.83	1
		3	0	12.86	12.81	12.71	1
		3	1	12.72	12.75	12.85	1
		3	3	12.82	12.74	12.73	1
		6	0	11.75	11.77	11.67	2
1.4M	64QAM	1	0	11.65	11.71	11.77	2
		1	2	11.70	11.72	11.73	2
		1	5	11.75	11.66	11.75	2
		3	0	11.84	11.83	11.68	2
		3	1	11.68	11.68	11.76	2
		3	3	11.64	11.78	11.71	2
		6	0	10.80	10.64	10.66	3
1.4M	256QAM	1	0	8.90	8.95	8.89	5
		1	2	8.90	8.91	8.83	5
		1	5	8.91	8.87	8.86	5
		3	0	8.89	8.92	8.85	5
		3	1	8.92	8.91	8.87	5
		3	3	8.86	8.97	8.91	5
		6	0	8.96	8.97	8.89	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	18.18	18.15	18.14	0
		1	37	18.15	18.12	18.11	0
		1	74	18.12	18.09	18.08	0
		36	0	17.16	17.13	17.12	1
		36	19	17.12	17.09	17.08	1
		36	39	17.08	17.05	17.04	1
		75	0	17.14	17.11	17.10	1
15M	16QAM	1	0	17.07	17.11	17.09	1
		1	37	17.08	17.10	17.10	1
		1	74	17.12	17.12	17.09	1
		36	0	16.11	16.10	16.02	2
		36	19	16.02	16.08	16.02	2
		36	39	16.05	16.07	16.05	2
		75	0	16.05	16.02	16.11	2
15M	64QAM	1	0	16.02	16.04	16.10	2
		1	37	16.11	16.11	16.06	2
		1	74	16.04	16.03	16.02	2
		36	0	15.07	15.03	15.07	3
		36	19	15.08	15.06	15.09	3
		36	39	15.02	14.99	15.09	3
		75	0	15.08	15.06	15.00	3
15M	256QAM	1	0	12.98	12.97	13.04	5
		1	37	13.01	13.02	13.06	5
		1	74	12.99	12.97	12.98	5
		36	0	12.99	13.06	13.04	5
		36	19	12.98	13.06	12.97	5
		36	39	13.06	13.00	13.00	5
		75	0	13.02	13.00	13.02	5
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	18.06	18.05	18.06	0
		1	24	18.04	18.02	17.95	0
		1	49	18.04	17.95	18.00	0
		25	0	17.15	16.99	17.09	1
		25	12	16.92	16.90	16.93	1
		25	25	16.97	16.92	16.98	1
		50	0	16.94	16.99	17.10	1
10M	16QAM	1	0	16.99	17.02	17.00	1
		1	24	17.05	16.96	16.97	1
		1	49	16.96	16.99	16.91	1
		25	0	16.06	15.96	15.88	2
		25	12	15.87	15.96	15.83	2
		25	25	15.92	15.86	15.89	2
		50	0	15.96	15.92	16.06	2
10M	64QAM	1	0	15.92	15.99	15.99	2
		1	24	15.95	16.03	15.94	2
		1	49	15.95	15.93	15.89	2
		25	0	14.90	15.00	14.92	3
		25	12	14.86	14.90	14.94	3
		25	25	14.88	14.98	14.93	3
		50	0	15.03	14.94	14.82	3
10M	256QAM	1	0	12.92	12.92	12.95	5
		1	24	13.01	12.95	13.02	5
		1	49	12.98	12.97	12.90	5
		25	0	12.99	12.96	13.01	5
		25	12	12.88	13.05	12.92	5
		25	25	12.99	12.90	12.98	5
		50	0	13.02	12.91	12.93	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	18.02	17.98	17.95	0
		1	12	18.07	18.09	17.81	0
		1	24	17.97	18.03	17.85	0
		12	0	17.06	16.91	17.05	1
		12	6	16.89	17.00	16.86	1
		12	13	16.84	16.93	16.88	1
		25	0	16.93	16.96	16.97	1
5M	16QAM	1	0	16.90	17.02	17.05	1
		1	12	17.06	16.96	17.00	1
		1	24	17.10	16.95	16.86	1
		12	0	16.06	15.95	15.93	2
		12	6	15.97	16.00	15.86	2
		12	13	15.89	15.96	15.83	2
		25	0	15.96	15.92	15.97	2
5M	64QAM	1	0	15.80	15.89	16.04	2
		1	12	15.96	16.02	15.95	2
		1	24	15.95	15.82	15.99	2
		12	0	14.90	14.92	14.82	3
		12	6	14.99	15.02	14.93	3
		12	13	14.97	14.92	14.92	3
		25	0	15.01	14.89	14.84	3
5M	256QAM	1	0	12.92	12.93	13.03	5
		1	12	13.01	12.95	13.05	5
		1	24	12.89	12.90	12.92	5
		12	0	12.93	13.05	12.98	5
		12	6	12.97	12.96	12.90	5
		12	13	13.00	12.99	12.99	5
		25	0	13.00	12.98	12.93	5
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	17.96	17.98	18.04	0
		1	7	18.10	18.09	17.95	0
		1	14	18.08	17.93	17.95	0
		8	0	17.16	17.01	16.97	1
		8	3	17.00	16.97	16.96	1
		8	7	16.91	16.87	16.93	1
		15	0	17.00	17.05	17.10	1
3M	16QAM	1	0	17.01	17.02	17.04	1
		1	7	17.06	16.95	17.06	1
		1	14	17.01	17.02	16.88	1
		8	0	16.00	15.99	15.95	2
		8	3	15.91	16.00	15.79	2
		8	7	15.89	15.94	15.82	2
		15	0	15.91	15.93	16.01	2
3M	64QAM	1	0	15.90	16.00	16.04	2
		1	7	15.88	16.04	16.00	2
		1	14	15.97	15.80	15.87	2
		8	0	14.95	15.03	14.85	3
		8	3	14.87	15.02	14.91	3
		8	7	14.93	14.97	15.04	3
		15	0	14.99	15.01	14.81	3
3M	256QAM	1	0	12.88	12.87	12.94	5
		1	7	12.95	12.97	12.96	5
		1	14	12.98	12.96	12.92	5
		8	0	12.96	13.06	12.97	5
		8	3	12.97	13.01	12.91	5
		8	7	12.97	12.99	12.91	5
		15	0	12.98	13.00	12.97	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	17.96	18.00	17.88	0
		1	2	17.85	18.05	17.87	0
		1	5	17.87	17.96	17.94	0
		3	0	17.96	18.00	17.99	0
		3	1	17.89	17.94	17.99	0
		3	3	17.96	17.89	17.93	0
		6	0	16.99	16.93	16.91	1
1.4M	16QAM	1	0	16.99	16.89	17.01	1
		1	2	16.90	16.88	16.92	1
		1	5	16.90	16.99	16.91	1
		3	0	16.83	16.96	16.90	1
		3	1	16.90	16.86	16.83	1
		3	3	16.97	16.93	16.84	1
		6	0	15.97	15.94	15.91	2
1.4M	64QAM	1	0	15.88	15.91	15.98	2
		1	2	15.94	15.88	16.01	2
		1	5	15.86	15.89	15.97	2
		3	0	15.95	15.91	15.86	2
		3	1	15.98	15.87	15.91	2
		3	3	15.96	15.85	15.90	2
		6	0	14.94	14.90	14.82	3
1.4M	256QAM	1	0	12.97	13.03	13.05	5
		1	2	13.00	12.99	12.96	5
		1	5	13.05	13.04	12.97	5
		3	0	12.98	13.05	13.05	5
		3	1	12.98	13.01	13.02	5
		3	3	13.00	13.02	13.01	5
		6	0	13.04	13.06	13.06	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		14.13		0
		1	24		14.09		0
		1	49		14.05		0
		25	0		12.98		1
		25	12		12.96		1
		25	25		12.94		1
		50	0		12.93		1
10M	16QAM	1	0		12.85		1
		1	24		12.89		1
		1	49		12.81		1
		25	0		11.84		2
		25	12		11.92		2
		25	25		11.90		2
		50	0		11.88		2
10M	64QAM	1	0		11.87		2
		1	24		11.82		2
		1	49		11.89		2
		25	0		10.83		3
		25	12		10.79		3
		25	25		10.87		3
		50	0		10.83		3
10M	256QAM	1	0		8.96		5
		1	24		9.00		5
		1	49		9.05		5
		25	0		8.99		5
		25	12		9.00		5
		25	25		9.03		5
		50	0		8.95		5
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	13.86	14.07	13.87	0
		1	12	13.93	13.86	13.95	0
		1	24	13.96	13.92	13.86	0
		12	0	12.81	12.88	12.72	1
		12	6	12.81	12.92	12.79	1
		12	13	12.87	12.78	12.81	1
		25	0	12.73	12.81	12.82	1
5M	16QAM	1	0	12.71	12.79	12.83	1
		1	12	12.75	12.85	12.85	1
		1	24	12.85	12.66	12.79	1
		12	0	11.75	11.78	11.83	2
		12	6	11.91	11.87	11.77	2
		12	13	11.77	11.86	11.71	2
		25	0	11.79	11.88	11.78	2
5M	64QAM	1	0	11.90	11.72	11.78	2
		1	12	11.71	11.81	11.77	2
		1	24	11.82	11.83	11.72	2
		12	0	10.73	10.71	10.77	3
		12	6	10.83	10.77	10.71	3
		12	13	10.65	10.84	10.80	3
		25	0	10.71	10.70	10.71	3
5M	256QAM	1	0	8.96	8.88	8.99	5
		1	12	8.97	8.90	8.96	5
		1	24	8.92	8.97	9.01	5
		12	0	8.86	8.91	8.95	5
		12	6	8.95	8.90	9.02	5
		12	13	8.99	9.01	9.02	5
		25	0	8.86	8.91	8.99	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	16.72	16.91	16.89	0
		1	50	16.68	16.87	16.85	0
		1	99	16.66	16.85	16.83	0
		50	0	15.77	15.96	15.94	1
		50	25	15.76	15.95	15.93	1
		50	50	15.75	15.94	15.92	1
		100	0	15.72	15.91	15.89	1
20M	16QAM	1	0	15.65	15.74	15.74	1
		1	50	15.68	15.73	15.70	1
		1	99	15.74	15.75	15.67	1
		50	0	14.74	14.76	14.68	2
		50	25	14.69	14.75	14.73	2
		50	50	14.68	14.72	14.72	2
		100	0	14.73	14.68	14.70	2
20M	64QAM	1	0	14.74	14.73	14.76	2
		1	50	14.74	14.71	14.73	2
		1	99	14.69	14.67	14.67	2
		50	0	13.74	13.74	13.75	3
		50	25	13.73	13.71	13.75	3
		50	50	13.72	13.66	13.68	3
		100	0	13.76	13.69	13.72	3
20M	256QAM	1	0	11.86	11.82	11.80	5
		1	50	11.80	11.82	11.86	5
		1	99	11.89	11.82	11.85	5
		50	0	11.80	11.83	11.81	5
		50	25	11.81	11.82	11.82	5
		50	50	11.82	11.81	11.79	5
		100	0	11.84	11.83	11.84	5
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	16.61	16.75	16.83	0
		1	37	16.50	16.76	16.76	0
		1	74	16.61	16.67	16.77	0
		36	0	15.71	15.96	15.81	1
		36	19	15.69	15.80	15.79	1
		36	39	15.59	15.73	15.91	1
		75	0	15.61	15.76	15.80	1
15M	16QAM	1	0	15.52	15.62	15.74	1
		1	37	15.50	15.48	15.60	1
		1	74	15.61	15.66	15.44	1
		36	0	14.57	14.61	14.64	2
		36	19	14.50	14.62	14.51	2
		36	39	14.57	14.67	14.59	2
		75	0	14.65	14.57	14.65	2
15M	64QAM	1	0	14.63	14.66	14.65	2
		1	37	14.55	14.61	14.60	2
		1	74	14.51	14.49	14.48	2
		36	0	13.64	13.56	13.56	3
		36	19	13.68	13.55	13.54	3
		36	39	13.51	13.50	13.60	3
		75	0	13.63	13.61	13.64	3
15M	256QAM	1	0	11.81	11.78	11.73	5
		1	37	11.79	11.84	11.79	5
		1	74	11.73	11.74	11.77	5
		36	0	11.86	11.81	11.79	5
		36	19	11.78	11.83	11.79	5
		36	39	11.80	11.82	11.76	5
		75	0	11.84	11.79	11.77	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	16.56	16.84	16.71	0
		1	24	16.63	16.69	16.64	0
		1	49	16.57	16.65	16.71	0
		25	0	15.68	15.88	15.71	1
		25	12	15.72	15.80	15.66	1
		25	25	15.70	15.85	15.80	1
		50	0	15.59	15.76	15.65	1
10M	16QAM	1	0	15.55	15.62	15.59	1
		1	24	15.46	15.48	15.56	1
		1	49	15.55	15.53	15.48	1
		25	0	14.55	14.61	14.64	2
		25	12	14.56	14.72	14.66	2
		25	25	14.64	14.60	14.69	2
		50	0	14.58	14.61	14.53	2
10M	64QAM	1	0	14.59	14.61	14.61	2
		1	24	14.54	14.68	14.68	2
		1	49	14.51	14.58	14.58	2
		25	0	13.68	13.55	13.56	3
		25	12	13.67	13.63	13.58	3
		25	25	13.50	13.45	13.61	3
		50	0	13.67	13.52	13.63	3
10M	256QAM	1	0	11.85	11.84	11.80	5
		1	24	11.80	11.82	11.78	5
		1	49	11.73	11.70	11.72	5
		25	0	11.77	11.80	11.79	5
		25	12	11.73	11.75	11.78	5
		25	25	11.78	11.80	11.76	5
		50	0	11.79	11.80	11.75	5
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	16.57	16.81	16.75	0
		1	12	16.56	16.74	16.78	0
		1	24	16.61	16.75	16.69	0
		12	0	15.64	15.93	15.80	1
		12	6	15.62	15.89	15.85	1
		12	13	15.71	15.72	15.86	1
		25	0	15.61	15.90	15.82	1
5M	16QAM	1	0	15.52	15.66	15.66	1
		1	12	15.46	15.58	15.58	1
		1	24	15.53	15.57	15.54	1
		12	0	14.53	14.55	14.63	2
		12	6	14.56	14.71	14.55	2
		12	13	14.60	14.63	14.55	2
		25	0	14.70	14.56	14.65	2
5M	64QAM	1	0	14.50	14.54	14.65	2
		1	12	14.60	14.63	14.67	2
		1	24	14.59	14.61	14.59	2
		12	0	13.70	13.53	13.68	3
		12	6	13.60	13.61	13.60	3
		12	13	13.58	13.58	13.53	3
		25	0	13.71	13.62	13.62	3
5M	256QAM	1	0	11.81	11.79	11.79	5
		1	12	11.75	11.75	11.74	5
		1	24	11.76	11.77	11.79	5
		12	0	11.87	11.82	11.83	5
		12	6	11.73	11.81	11.84	5
		12	13	11.78	11.86	11.72	5
		25	0	11.80	11.78	11.79	5

LTE Conducted Power_ENDC_Laptop_Ant 0

LTE Band 41

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	19.62	18.99	18.64	19.64	19.61	0
		1	50	19.57	18.94	18.59	19.59	19.56	0
		1	99	19.56	18.93	18.58	19.58	19.55	0
		50	0	18.52	17.89	17.54	18.54	18.51	1
		50	25	18.50	17.87	17.52	18.52	18.49	1
		50	50	18.47	17.84	17.49	18.49	18.46	1
		100	0	18.44	17.81	17.46	18.46	18.43	1
20M	16QAM	1	0	18.33	17.70	17.38	18.44	18.32	1
		1	50	18.42	17.79	17.43	18.37	18.40	1
		1	99	18.40	17.70	17.35	18.43	18.34	1
		50	0	17.36	16.78	16.44	17.40	17.36	2
		50	25	17.34	16.78	16.39	17.45	17.41	2
		50	50	17.37	16.72	16.43	17.37	17.33	2
		100	0	17.39	16.71	16.44	17.44	17.39	2
20M	64QAM	1	0	17.36	16.69	16.39	17.41	17.42	2
		1	50	17.32	16.72	16.40	17.45	17.35	2
		1	99	17.32	16.73	16.37	17.40	17.37	2
		50	0	16.40	15.77	15.36	16.41	16.32	3
		50	25	16.40	15.79	15.42	16.39	16.35	3
		50	50	16.37	15.69	15.42	16.40	16.37	3
		100	0	16.40	15.75	15.43	16.36	16.41	3
20M	256QAM	1	0	14.53	13.94	13.57	14.56	14.61	5
		1	50	14.60	13.97	13.55	14.63	14.55	5
		1	99	14.53	13.94	13.61	14.57	14.57	5
		50	0	14.59	13.99	13.56	14.59	14.60	5
		50	25	14.55	13.89	13.54	14.60	14.60	5
		50	50	14.60	13.99	13.59	14.61	14.56	5
		100	0	14.55	13.92	13.61	14.55	14.56	5
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	19.48	18.88	18.46	19.60	19.57	0
		1	37	19.52	18.84	18.41	19.44	19.37	0
		1	74	19.37	18.86	18.42	19.44	19.41	0
		36	0	18.42	17.76	17.34	18.43	18.42	1
		36	19	18.37	17.81	17.41	18.47	18.37	1
		36	39	18.32	17.73	17.34	18.39	18.34	1
		75	0	18.30	17.76	17.27	18.32	18.33	1
15M	16QAM	1	0	18.18	17.50	17.27	18.35	18.24	1
		1	37	18.29	17.70	17.31	18.28	18.33	1
		1	74	18.20	17.55	17.21	18.29	18.24	1
		36	0	17.18	16.72	16.39	17.34	17.27	2
		36	19	17.16	16.54	16.26	17.45	17.22	2
		36	39	17.24	16.51	16.32	17.23	17.20	2
		75	0	17.29	16.53	16.41	17.32	17.21	2
15M	64QAM	1	0	17.22	16.64	16.27	17.36	17.30	2
		1	37	17.20	16.68	16.31	17.28	17.28	2
		1	74	17.15	16.61	16.18	17.31	17.30	2
		36	0	16.33	15.69	15.28	16.24	16.20	3
		36	19	16.16	15.61	15.40	16.24	16.35	3
		36	39	16.25	15.56	15.31	16.24	16.28	3
		75	0	16.29	15.70	15.32	16.24	16.25	3
15M	256QAM	1	0	14.53	13.87	13.52	14.54	14.55	5
		1	37	14.60	13.87	13.46	14.58	14.46	5
		1	74	14.49	13.94	13.58	14.57	14.49	5
		36	0	14.51	13.93	13.49	14.50	14.58	5
		36	19	14.45	13.81	13.47	14.55	14.54	5
		36	39	14.52	13.98	13.53	14.55	14.51	5
		75	0	14.54	13.92	13.56	14.49	14.54	5

LTE Conducted Power_ENDC_Laptop_Ant 0									
LTE Band 41									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	19.38	18.87	18.37	19.50	19.52	0
		1	24	19.49	18.79	18.40	19.39	19.30	0
		1	49	19.38	18.84	18.33	19.43	19.38	0
		25	0	18.30	17.76	17.24	18.34	18.40	1
		25	12	18.30	17.75	17.36	18.41	18.32	1
		25	25	18.45	17.73	17.26	18.36	18.33	1
		50	0	18.25	17.66	17.23	18.23	18.31	1
10M	16QAM	1	0	18.20	17.54	17.23	18.26	18.18	1
		1	24	18.21	17.71	17.28	18.23	18.33	1
		1	49	18.16	17.62	17.16	18.29	18.14	1
		25	0	17.28	16.63	16.29	17.29	17.25	2
		25	12	17.24	16.54	16.19	17.38	17.17	2
		25	25	17.17	16.65	16.23	17.13	17.15	2
		50	0	17.24	16.66	16.34	17.32	17.18	2
10M	64QAM	1	0	17.23	16.61	16.18	17.35	17.21	2
		1	24	17.16	16.55	16.29	17.19	17.23	2
		1	49	17.09	16.56	16.11	17.22	17.27	2
		25	0	16.33	15.69	15.27	16.14	16.19	3
		25	12	16.22	15.75	15.39	16.19	16.27	3
		25	25	16.31	15.51	15.31	16.15	16.21	3
		50	0	16.31	15.58	15.32	16.23	16.23	3
10M	256QAM	1	0	14.53	13.85	13.51	14.56	14.51	5
		1	24	14.54	13.94	13.48	14.56	14.54	5
		1	49	14.47	13.92	13.61	14.51	14.48	5
		25	0	14.55	13.91	13.55	14.54	14.56	5
		25	12	14.51	13.86	13.52	14.60	14.58	5
		25	25	14.57	13.95	13.53	14.56	14.51	5
		50	0	14.55	13.91	13.54	14.46	14.51	5
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	19.45	18.88	18.29	19.40	19.43	0
		1	12	19.38	18.75	18.36	19.36	19.26	0
		1	24	19.43	18.74	18.25	19.39	19.33	0
		12	0	18.42	17.79	17.21	18.24	18.38	1
		12	6	18.41	17.80	17.34	18.31	18.24	1
		12	13	18.34	17.76	17.25	18.26	18.31	1
		25	0	18.20	17.73	17.17	18.21	18.22	1
5M	16QAM	1	0	18.10	17.58	17.19	18.18	18.17	1
		1	12	18.33	17.66	17.19	18.20	18.23	1
		1	24	18.21	17.61	17.14	18.25	18.13	1
		12	0	17.29	16.73	16.28	17.21	17.19	2
		12	6	17.13	16.53	16.16	17.38	17.12	2
		12	13	17.29	16.63	16.23	17.07	17.10	2
		25	0	17.28	16.56	16.29	17.25	17.18	2
5M	64QAM	1	0	17.33	16.59	16.10	17.27	17.13	2
		1	12	17.23	16.63	16.23	17.18	17.17	2
		1	24	17.11	16.65	16.10	17.14	17.26	2
		12	0	16.24	15.58	15.18	16.04	16.13	3
		12	6	16.26	15.67	15.32	16.15	16.26	3
		12	13	16.22	15.57	15.28	16.15	16.15	3
		25	0	16.28	15.69	15.32	16.19	16.21	3
5M	256QAM	1	0	14.56	13.90	13.46	14.52	14.60	5
		1	12	14.53	13.94	13.54	14.63	14.52	5
		1	24	14.52	13.86	13.59	14.53	14.41	5
		12	0	14.55	13.96	13.52	14.54	14.49	5
		12	6	14.48	13.88	13.51	14.58	14.52	5
		12	13	14.61	13.86	13.57	14.58	14.49	5
		25	0	14.54	13.91	13.52	14.57	14.52	5

LTE Conducted Power_ENDC_Laptop_Ant 0

LTE Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	16.36	16.11	16.18	16.33	0
		1	50	16.33	16.08	16.15	16.30	0
		1	99	16.31	16.06	16.13	16.28	0
		50	0	15.41	15.16	15.23	15.38	1
		50	25	15.36	15.11	15.18	15.33	1
		50	50	15.35	15.10	15.17	15.32	1
		100	0	15.38	15.13	15.20	15.35	1
20M	16QAM	1	0	15.27	15.02	15.11	15.27	1
		1	50	15.37	15.08	15.12	15.34	1
		1	99	15.29	15.09	15.12	15.34	1
		50	0	14.32	14.04	14.13	14.33	2
		50	25	14.30	14.11	14.15	14.24	2
		50	50	14.29	14.06	14.09	14.24	2
		100	0	14.32	14.01	14.18	14.27	2
20M	64QAM	1	0	14.33	14.04	14.15	14.27	2
		1	50	14.33	14.01	14.13	14.31	2
		1	99	14.32	14.08	14.18	14.25	2
		50	0	13.28	13.02	13.12	13.33	3
		50	25	13.33	13.02	13.12	13.23	3
		50	50	13.32	13.02	13.15	13.31	3
		100	0	13.28	13.05	13.08	13.26	3
20M	256QAM	1	0	10.68	10.67	10.61	10.63	5
		1	50	10.63	10.70	10.64	10.68	5
		1	99	10.64	10.61	10.61	10.68	5
		50	0	10.63	10.70	10.64	10.63	5
		50	25	10.63	10.70	10.61	10.71	5
		50	50	10.65	10.69	10.62	10.61	5
		100	0	10.61	10.70	10.63	10.62	5
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	16.35	16.05	15.97	16.22	0
		1	37	16.25	15.99	16.05	16.24	0
		1	74	16.19	15.86	16.02	16.12	0
		36	0	15.32	15.09	15.09	15.22	1
		36	19	15.15	14.93	14.97	15.22	1
		36	39	15.29	15.09	15.09	15.16	1
		75	0	15.27	14.98	15.10	15.30	1
15M	16QAM	1	0	15.12	14.98	14.99	15.19	1
		1	37	15.26	14.92	14.99	15.20	1
		1	74	15.08	14.99	14.98	15.22	1
		36	0	14.10	13.89	13.88	14.26	2
		36	19	14.26	14.04	13.93	14.14	2
		36	39	14.18	13.91	14.06	14.13	2
		75	0	14.23	13.82	14.10	14.23	2
15M	64QAM	1	0	14.31	13.86	14.01	14.17	2
		1	37	14.11	13.85	13.90	14.19	2
		1	74	14.19	13.99	14.06	14.07	2
		36	0	13.20	12.91	13.01	13.26	3
		36	19	13.13	12.78	12.99	13.12	3
		36	39	13.25	12.83	13.00	13.26	3
		75	0	13.25	12.89	12.99	13.16	3
15M	256QAM	1	0	10.64	10.61	10.61	10.53	5
		1	37	10.57	10.65	10.58	10.58	5
		1	74	10.63	10.53	10.56	10.68	5
		36	0	10.59	10.67	10.55	10.58	5
		36	19	10.58	10.66	10.61	10.71	5
		36	39	10.61	10.62	10.59	10.55	5
		75	0	10.55	10.65	10.53	10.56	5

LTE Conducted Power_ENDC_Laptop_Ant 0

LTE Band 48

BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	16.33	15.93	15.91	16.13	0
		1	24	16.21	15.87	15.97	16.20	0
		1	49	16.27	15.93	15.95	16.02	0
		25	0	15.27	14.99	15.04	15.14	1
		25	12	15.17	15.03	14.95	15.17	1
		25	25	15.25	14.95	15.03	15.07	1
		50	0	15.23	14.94	14.99	15.23	1
10M	16QAM	1	0	15.25	14.95	14.96	15.16	1
		1	24	15.22	14.94	14.88	15.18	1
		1	49	15.15	14.94	14.90	15.16	1
		25	0	14.15	13.79	14.03	14.18	2
		25	12	14.24	13.95	13.94	14.10	2
		25	25	14.05	14.03	14.03	14.07	2
		50	0	14.24	13.84	13.98	14.20	2
10M	64QAM	1	0	14.31	13.88	13.96	14.07	2
		1	24	14.19	13.94	13.90	14.12	2
		1	49	14.19	13.93	14.13	13.99	2
		25	0	13.15	12.92	13.04	13.19	3
		25	12	13.15	12.81	13.02	13.02	3
		25	25	13.17	12.84	12.96	13.16	3
		50	0	13.14	12.94	12.96	13.14	3
10M	256QAM	1	0	10.66	10.62	10.55	10.56	5
		1	24	10.56	10.70	10.62	10.59	5
		1	49	10.62	10.60	10.55	10.65	5
		25	0	10.60	10.64	10.57	10.62	5
		25	12	10.62	10.60	10.58	10.66	5
		25	25	10.60	10.62	10.62	10.51	5
		50	0	10.57	10.70	10.63	10.57	5
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	16.29	15.91	16.04	16.12	0
		1	12	16.27	15.94	16.12	16.18	0
		1	24	16.24	15.94	16.04	15.93	0
		12	0	15.36	15.00	15.12	15.13	1
		12	6	15.22	14.98	15.07	15.11	1
		12	13	15.16	14.96	15.11	15.02	1
		25	0	15.23	15.01	15.11	15.23	1
5M	16QAM	1	0	15.11	14.99	15.00	15.08	1
		1	12	15.25	14.95	14.96	15.11	1
		1	24	15.14	14.97	14.88	15.08	1
		12	0	14.10	13.81	13.88	14.18	2
		12	6	14.27	13.97	14.01	14.06	2
		12	13	14.19	13.97	13.91	14.06	2
		25	0	14.18	13.81	14.00	14.18	2
5M	64QAM	1	0	14.22	13.86	14.07	14.04	2
		1	12	14.12	13.88	13.92	14.03	2
		1	24	14.12	14.00	14.14	13.93	2
		12	0	13.26	12.99	12.93	13.18	3
		12	6	13.14	12.79	12.98	13.00	3
		12	13	13.30	12.82	12.94	13.11	3
		25	0	13.20	12.96	12.98	13.04	3
5M	256QAM	1	0	10.59	10.61	10.56	10.58	5
		1	12	10.54	10.64	10.58	10.58	5
		1	24	10.54	10.56	10.60	10.62	5
		12	0	10.53	10.66	10.55	10.56	5
		12	6	10.62	10.69	10.57	10.62	5
		12	13	10.59	10.65	10.54	10.56	5
		25	0	10.56	10.67	10.59	10.53	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	14.77	14.71	14.67	0
		1	50	14.75	14.69	14.65	0
		1	99	14.72	14.66	14.62	0
		50	0	13.61	13.55	13.51	1
		50	25	13.58	13.52	13.48	1
		50	50	13.57	13.51	13.47	1
		100	0	13.59	13.53	13.49	1
20M	16QAM	1	0	13.49	13.49	13.38	1
		1	50	13.57	13.46	13.40	1
		1	99	13.53	13.50	13.42	1
		50	0	12.47	12.50	12.38	2
		50	25	12.50	12.49	12.45	2
		50	50	12.55	12.45	12.46	2
		100	0	12.52	12.51	12.41	2
20M	64QAM	1	0	12.49	12.41	12.43	2
		1	50	12.53	12.49	12.38	2
		1	99	12.57	12.44	12.44	2
		50	0	11.47	11.40	11.39	3
		50	25	11.52	11.47	11.42	3
		50	50	11.48	11.47	11.42	3
		100	0	11.51	11.47	11.39	3
20M	256QAM	1	0	9.64	9.66	9.67	5
		1	50	9.69	9.63	9.61	5
		1	99	9.66	9.66	9.67	5
		50	0	9.69	9.63	9.66	5
		50	25	9.67	9.61	9.67	5
		50	50	9.68	9.59	9.69	5
		100	0	9.61	9.66	9.65	5
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	14.57	14.59	14.58	0
		1	37	14.66	14.60	14.45	0
		1	74	14.61	14.45	14.41	0
		36	0	13.42	13.50	13.43	1
		36	19	13.37	13.41	13.33	1
		36	39	13.52	13.46	13.38	1
		75	0	13.46	13.47	13.31	1
15M	16QAM	1	0	13.40	13.40	13.28	1
		1	37	13.56	13.29	13.35	1
		1	74	13.32	13.44	13.24	1
		36	0	12.27	12.37	12.29	2
		36	19	12.47	12.31	12.28	2
		36	39	12.53	12.36	12.32	2
		75	0	12.33	12.37	12.32	2
15M	64QAM	1	0	12.37	12.30	12.27	2
		1	37	12.39	12.31	12.27	2
		1	74	12.44	12.31	12.30	2
		36	0	11.44	11.27	11.20	3
		36	19	11.45	11.32	11.26	3
		36	39	11.44	11.36	11.38	3
		75	0	11.41	11.32	11.24	3
15M	256QAM	1	0	9.59	9.57	9.64	5
		1	37	9.68	9.60	9.58	5
		1	74	9.57	9.66	9.66	5
		36	0	9.64	9.54	9.61	5
		36	19	9.60	9.59	9.57	5
		36	39	9.64	9.56	9.69	5
		75	0	9.52	9.63	9.57	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	14.63	14.57	14.56	0
		1	24	14.64	14.59	14.44	0
		1	49	14.57	14.51	14.37	0
		25	0	13.50	13.48	13.34	1
		25	12	13.38	13.43	13.22	1
		25	25	13.52	13.46	13.32	1
		50	0	13.44	13.40	13.20	1
10M	16QAM	1	0	13.27	13.42	13.16	1
		1	24	13.47	13.43	13.25	1
		1	49	13.43	13.43	13.26	1
		25	0	12.32	12.40	12.27	2
		25	12	12.42	12.34	12.28	2
		25	25	12.47	12.33	12.39	2
		50	0	12.30	12.40	12.26	2
10M	64QAM	1	0	12.37	12.29	12.18	2
		1	24	12.41	12.34	12.27	2
		1	49	12.49	12.40	12.43	2
		25	0	11.36	11.30	11.32	3
		25	12	11.41	11.30	11.30	3
		25	25	11.40	11.31	11.25	3
		50	0	11.29	11.41	11.26	3
10M	256QAM	1	0	9.58	9.61	9.57	5
		1	24	9.61	9.62	9.53	5
		1	49	9.64	9.64	9.67	5
		25	0	9.67	9.57	9.65	5
		25	12	9.58	9.54	9.63	5
		25	25	9.64	9.49	9.65	5
		50	0	9.56	9.61	9.56	5
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	14.66	14.64	14.54	0
		1	12	14.64	14.62	14.51	0
		1	24	14.59	14.46	14.52	0
		12	0	13.48	13.37	13.32	1
		12	6	13.50	13.47	13.30	1
		12	13	13.51	13.46	13.31	1
		25	0	13.53	13.41	13.36	1
5M	16QAM	1	0	13.27	13.34	13.21	1
		1	12	13.57	13.32	13.21	1
		1	24	13.35	13.40	13.24	1
		12	0	12.25	12.26	12.30	2
		12	6	12.42	12.46	12.27	2
		12	13	12.53	12.34	12.40	2
		25	0	12.40	12.39	12.25	2
5M	64QAM	1	0	12.28	12.31	12.28	2
		1	12	12.52	12.41	12.25	2
		1	24	12.49	12.33	12.38	2
		12	0	11.31	11.20	11.24	3
		12	6	11.45	11.38	11.20	3
		12	13	11.37	11.28	11.30	3
		25	0	11.40	11.36	11.15	3
5M	256QAM	1	0	9.66	9.52	9.52	5
		1	12	9.57	9.55	9.49	5
		1	24	9.56	9.62	9.52	5
		12	0	9.54	9.63	9.60	5
		12	6	9.65	9.65	9.50	5
		12	13	9.52	9.60	9.56	5
		25	0	9.54	9.55	9.62	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	14.71	14.64	14.48	0
		1	7	14.64	14.58	14.48	0
		1	14	14.49	14.52	14.45	0
		8	0	13.52	13.46	13.25	1
		8	3	13.53	13.40	13.19	1
		8	7	13.43	13.31	13.37	1
		15	0	13.43	13.49	13.32	1
3M	16QAM	1	0	13.42	13.45	13.29	1
		1	7	13.46	13.43	13.27	1
		1	14	13.47	13.48	13.38	1
		8	0	12.34	12.30	12.29	2
		8	3	12.33	12.33	12.29	2
		8	7	12.42	12.35	12.32	2
		15	0	12.43	12.44	12.17	2
3M	64QAM	1	0	12.37	12.36	12.37	2
		1	7	12.40	12.41	12.31	2
		1	14	12.49	12.28	12.38	2
		8	0	11.35	11.27	11.33	3
		8	3	11.34	11.33	11.21	3
		8	7	11.44	11.36	11.24	3
		15	0	11.30	11.29	11.26	3
3M	256QAM	1	0	9.62	9.56	9.50	5
		1	7	9.55	9.52	9.59	5
		1	14	9.55	9.61	9.54	5
		8	0	9.57	9.67	9.60	5
		8	3	9.58	9.64	9.51	5
		8	7	9.60	9.63	9.55	5
		15	0	9.56	9.52	9.54	5
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	14.56	14.65	14.51	0
		1	2	14.70	14.55	14.48	0
		1	5	14.64	14.53	14.57	0
		3	0	14.55	14.54	14.54	0
		3	1	14.49	14.49	14.56	0
		3	3	14.62	14.43	14.56	0
		6	0	13.64	13.49	13.52	1
1.4M	16QAM	1	0	13.53	13.43	13.55	1
		1	2	13.48	13.55	13.42	1
		1	5	13.62	13.48	13.54	1
		3	0	13.58	13.48	13.47	1
		3	1	13.61	13.45	13.43	1
		3	3	13.51	13.49	13.47	1
		6	0	12.55	12.45	12.44	2
1.4M	64QAM	1	0	12.58	12.56	12.47	2
		1	2	12.45	12.45	12.51	2
		1	5	12.53	12.44	12.38	2
		3	0	12.59	12.45	12.48	2
		3	1	12.61	12.45	12.45	2
		3	3	12.57	12.48	12.49	2
		6	0	11.43	11.48	11.40	3
1.4M	256QAM	1	0	9.62	9.52	9.56	5
		1	2	9.59	9.60	9.49	5
		1	5	9.60	9.62	9.53	5
		3	0	9.58	9.58	9.59	5
		3	1	9.58	9.59	9.53	5
		3	3	9.59	9.65	9.59	5
		6	0	9.59	9.50	9.60	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 71							
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	19.93	19.96	19.99	0
		1	50	19.91	19.94	19.97	0
		1	99	19.89	19.92	19.95	0
		50	0	18.93	18.96	18.99	1
		50	25	18.90	18.93	18.96	1
		50	50	18.88	18.91	18.94	1
		100	0	18.90	18.93	18.96	1
20M	16QAM	1	0	18.80	18.85	18.83	1
		1	50	18.84	18.82	18.89	1
		1	99	18.80	18.83	18.85	1
		50	0	17.81	17.78	17.88	2
		50	25	17.83	17.88	17.85	2
		50	50	17.78	17.81	17.87	2
		100	0	17.84	17.84	17.86	2
20M	64QAM	1	0	17.83	17.82	17.84	2
		1	50	17.86	17.83	17.88	2
		1	99	17.79	17.86	17.85	2
		50	0	16.82	16.88	16.84	3
		50	25	16.88	16.87	16.85	3
		50	50	16.82	16.79	16.87	3
		100	0	16.82	16.80	16.83	3
20M	256QAM	1	0	14.75	14.76	14.81	5
		1	50	14.79	14.72	14.72	5
		1	99	14.72	14.78	14.81	5
		50	0	14.71	14.79	14.75	5
		50	25	14.72	14.79	14.72	5
		50	50	14.74	14.79	14.71	5
		100	0	14.73	14.79	14.78	5
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	QPSK	1	0	19.91	19.89	19.89	0
		1	37	19.84	19.86	19.88	0
		1	74	19.86	19.89	19.88	0
		36	0	18.93	18.92	18.93	1
		36	19	18.84	18.85	18.90	1
		36	39	18.80	18.86	18.89	1
		75	0	18.84	18.87	18.93	1
15M	16QAM	1	0	18.78	18.77	18.82	1
		1	37	18.79	18.82	18.86	1
		1	74	18.77	18.83	18.83	1
		36	0	17.72	17.77	17.78	2
		36	19	17.76	17.78	17.77	2
		36	39	17.75	17.74	17.78	2
		75	0	17.84	17.80	17.81	2
15M	64QAM	1	0	17.81	17.82	17.74	2
		1	37	17.83	17.77	17.85	2
		1	74	17.72	17.84	17.77	2
		36	0	16.73	16.80	16.84	3
		36	19	16.80	16.86	16.81	3
		36	39	16.73	16.75	16.82	3
		75	0	16.80	16.72	16.77	3
15M	256QAM	1	0	14.78	14.80	14.78	5
		1	37	14.74	14.80	14.79	5
		1	74	14.71	14.75	14.78	5
		36	0	14.78	14.80	14.81	5
		36	19	14.75	14.74	14.78	5
		36	39	14.80	14.79	14.78	5
		75	0	14.73	14.77	14.76	5

LTE Conducted Power_ENDC_Laptop_Ant 0							
LTE Band 71							
BW	MCS Index	Channel		133172	133297	133422	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	QPSK	1	0	19.80	19.84	19.79	0
		1	24	19.70	19.76	19.75	0
		1	49	19.79	19.83	19.75	0
		25	0	18.83	18.92	18.88	1
		25	12	18.84	18.77	18.87	1
		25	25	18.66	18.81	18.77	1
		50	0	18.79	18.72	18.81	1
10M	16QAM	1	0	18.76	18.71	18.72	1
		1	24	18.74	18.81	18.82	1
		1	49	18.70	18.74	18.83	1
		25	0	17.68	17.70	17.66	2
		25	12	17.65	17.66	17.71	2
		25	25	17.61	17.69	17.66	2
		50	0	17.70	17.68	17.77	2
10M	64QAM	1	0	17.69	17.77	17.66	2
		1	24	17.75	17.62	17.81	2
		1	49	17.71	17.77	17.71	2
		25	0	16.68	16.75	16.82	3
		25	12	16.75	16.77	16.80	3
		25	25	16.61	16.73	16.77	3
		50	0	16.76	16.63	16.69	3
10M	256QAM	1	0	14.69	14.71	14.76	5
		1	24	14.71	14.73	14.70	5
		1	49	14.63	14.75	14.68	5
		25	0	14.70	14.79	14.72	5
		25	12	14.68	14.70	14.68	5
		25	25	14.74	14.74	14.70	5
		50	0	14.65	14.77	14.74	5
BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	19.85	19.88	19.79	0
		1	12	19.80	19.83	19.75	0
		1	24	19.85	19.78	19.65	0
		12	0	18.82	18.77	18.80	1
		12	6	18.72	18.83	18.74	1
		12	13	18.73	18.83	18.71	1
		25	0	18.69	18.84	18.81	1
5M	16QAM	1	0	18.78	18.63	18.79	1
		1	12	18.78	18.80	18.77	1
		1	24	18.67	18.79	18.78	1
		12	0	17.61	17.76	17.73	2
		12	6	17.63	17.66	17.70	2
		12	13	17.62	17.73	17.66	2
		25	0	17.71	17.77	17.70	2
5M	64QAM	1	0	17.71	17.78	17.65	2
		1	12	17.80	17.64	17.76	2
		1	24	17.58	17.76	17.73	2
		12	0	16.62	16.79	16.71	3
		12	6	16.77	16.74	16.81	3
		12	13	16.70	16.71	16.81	3
		25	0	16.76	16.68	16.72	3
5M	256QAM	1	0	14.75	14.77	14.71	5
		1	12	14.68	14.73	14.78	5
		1	24	14.70	14.73	14.74	5
		12	0	14.70	14.70	14.80	5
		12	6	14.70	14.74	14.69	5
		12	13	14.76	14.69	14.77	5
		25	0	14.63	14.70	14.66	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	14.56	14.67	14.84	0
		1	50	14.54	14.65	14.82	0
		1	99	14.51	14.62	14.79	0
		50	0	13.53	13.64	13.81	1
		50	25	13.50	13.61	13.78	1
		50	50	13.47	13.58	13.75	1
		100	0	13.51	13.62	13.79	1
20M	16QAM	1	0	13.32	13.35	13.50	1
		1	50	13.29	13.30	13.65	1
		1	99	13.21	13.44	13.56	1
		50	0	12.32	12.42	12.63	2
		50	25	12.34	12.35	12.52	2
		50	50	12.24	12.46	12.53	2
		100	0	12.26	12.43	12.59	2
20M	64QAM	1	0	12.21	12.45	12.60	2
		1	50	12.26	12.40	12.59	2
		1	99	12.32	12.36	12.65	2
		50	0	11.34	11.47	11.54	3
		50	25	11.28	11.55	11.64	3
		50	50	11.23	11.57	11.59	3
		100	0	11.24	11.52	11.62	3
20M	256QAM	1	0	9.47	9.58	9.81	5
		1	50	9.56	9.58	9.83	5
		1	99	9.46	9.60	9.79	5
		50	0	9.54	9.61	9.83	5
		50	25	9.46	9.62	9.79	5
		50	50	9.54	9.62	9.83	5
		100	0	9.46	9.61	9.82	5
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	14.55	14.62	14.83	0
		1	37	14.46	14.59	14.77	0
		1	74	14.51	14.60	14.76	0
		36	0	13.48	13.60	13.71	1
		36	19	13.47	13.54	13.75	1
		36	39	13.45	13.54	13.66	1
		75	0	13.50	13.55	13.72	1
15M	16QAM	1	0	13.31	13.35	13.47	1
		1	37	13.25	13.30	13.56	1
		1	74	13.18	13.42	13.55	1
		36	0	12.30	12.39	12.58	2
		36	19	12.29	12.28	12.47	2
		36	39	12.24	12.37	12.45	2
		75	0	12.21	12.38	12.51	2
15M	64QAM	1	0	12.12	12.42	12.55	2
		1	37	12.17	12.35	12.51	2
		1	74	12.27	12.33	12.60	2
		36	0	11.25	11.47	11.54	3
		36	19	11.22	11.52	11.61	3
		36	39	11.17	11.55	11.58	3
		75	0	11.20	11.47	11.58	3
15M	256QAM	1	0	9.52	9.65	9.77	5
		1	37	9.50	9.64	9.80	5
		1	74	9.52	9.59	9.80	5
		36	0	9.55	9.60	9.84	5
		36	19	9.53	9.67	9.75	5
		36	39	9.56	9.58	9.80	5
		75	0	9.55	9.66	9.80	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	14.52	14.49	14.79	0
		1	24	14.43	14.55	14.68	0
		1	49	14.37	14.47	14.64	0
		25	0	13.39	13.55	13.59	1
		25	12	13.32	13.42	13.64	1
		25	25	13.30	13.50	13.64	1
		50	0	13.39	13.40	13.66	1
10M	16QAM	1	0	13.27	13.32	13.44	1
		1	24	13.12	13.26	13.53	1
		1	49	13.13	13.42	13.41	1
		25	0	12.19	12.32	12.53	2
		25	12	12.18	12.24	12.37	2
		25	25	12.17	12.34	12.45	2
		50	0	12.18	12.26	12.39	2
10M	64QAM	1	0	11.98	12.27	12.44	2
		1	24	12.12	12.30	12.36	2
		1	49	12.25	12.32	12.50	2
		25	0	11.24	11.35	11.46	3
		25	12	11.22	11.45	11.47	3
		25	25	11.11	11.49	11.49	3
		50	0	11.14	11.34	11.47	3
10M	256QAM	1	0	9.51	9.64	9.71	5
		1	24	9.48	9.63	9.74	5
		1	49	9.49	9.49	9.73	5
		25	0	9.45	9.59	9.75	5
		25	12	9.45	9.57	9.72	5
		25	25	9.55	9.50	9.76	5
		50	0	9.51	9.57	9.73	5
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	14.50	14.50	14.73	0
		1	12	14.40	14.47	14.67	0
		1	24	14.51	14.45	14.53	0
		12	0	13.46	13.49	13.47	1
		12	6	13.46	13.47	13.58	1
		12	13	13.37	13.42	13.50	1
		25	0	13.45	13.51	13.55	1
5M	16QAM	1	0	13.17	13.33	13.46	1
		1	12	13.20	13.23	13.46	1
		1	24	13.14	13.29	13.55	1
		12	0	12.28	12.36	12.50	2
		12	6	12.28	12.23	12.46	2
		12	13	12.20	12.24	12.38	2
		25	0	12.09	12.26	12.40	2
5M	64QAM	1	0	12.07	12.42	12.43	2
		1	12	12.02	12.30	12.39	2
		1	24	12.21	12.33	12.60	2
		12	0	11.11	11.46	11.39	3
		12	6	11.15	11.52	11.56	3
		12	13	11.02	11.53	11.48	3
		25	0	11.17	11.43	11.51	3
5M	256QAM	1	0	9.43	9.60	9.77	5
		1	12	9.46	9.58	9.78	5
		1	24	9.42	9.56	9.75	5
		12	0	9.50	9.57	9.77	5
		12	6	9.49	9.62	9.68	5
		12	13	9.54	9.51	9.74	5
		25	0	9.53	9.66	9.76	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	14.42	14.52	14.71	0
		1	7	14.38	14.44	14.75	0
		1	14	14.47	14.60	14.66	0
		8	0	13.36	13.45	13.69	1
		8	3	13.35	13.52	13.62	1
		8	7	13.35	13.50	13.55	1
		15	0	13.35	13.54	13.58	1
3M	16QAM	1	0	13.27	13.25	13.35	1
		1	7	13.22	13.18	13.51	1
		1	14	13.11	13.27	13.51	1
		8	0	12.23	12.28	12.48	2
		8	3	12.17	12.24	12.32	2
		8	7	12.21	12.22	12.38	2
		15	0	12.13	12.30	12.50	2
3M	64QAM	1	0	12.02	12.27	12.48	2
		1	7	12.04	12.25	12.45	2
		1	14	12.19	12.29	12.49	2
		8	0	11.19	11.35	11.52	3
		8	3	11.21	11.47	11.48	3
		8	7	11.16	11.43	11.47	3
		15	0	11.20	11.36	11.44	3
3M	256QAM	1	0	9.51	9.61	9.70	5
		1	7	9.43	9.57	9.71	5
		1	14	9.43	9.58	9.73	5
		8	0	9.51	9.54	9.83	5
		8	3	9.44	9.62	9.66	5
		8	7	9.54	9.53	9.70	5
		15	0	9.47	9.58	9.71	5
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	14.46	14.63	14.66	0
		1	2	14.38	14.57	14.74	0
		1	5	14.36	14.52	14.60	0
		3	0	14.39	14.39	14.43	0
		3	1	14.26	14.34	14.36	0
		3	3	14.36	14.34	14.29	0
		6	0	13.31	13.44	13.40	1
1.4M	16QAM	1	0	13.38	13.41	13.34	1
		1	2	13.29	13.37	13.29	1
		1	5	13.38	13.36	13.39	1
		3	0	13.30	13.40	13.37	1
		3	1	13.34	13.44	13.34	1
		3	3	13.33	13.25	13.36	1
		6	0	12.33	12.35	12.38	2
1.4M	64QAM	1	0	12.28	12.29	12.41	2
		1	2	12.34	12.30	12.43	2
		1	5	12.37	12.39	12.37	2
		3	0	12.37	12.31	12.32	2
		3	1	12.31	12.32	12.38	2
		3	3	12.34	12.39	12.34	2
		6	0	12.35	12.33	12.31	3
1.4M	256QAM	1	0	9.42	9.57	9.75	5
		1	2	9.37	9.63	9.74	5
		1	5	9.47	9.60	9.71	5
		3	0	9.47	9.58	9.72	5
		3	1	9.41	9.64	9.74	5
		3	3	9.46	9.52	9.76	5
		6	0	9.47	9.52	9.73	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	18.79	18.65	18.71	0
		1	50	18.75	18.61	18.67	0
		1	99	18.71	18.57	18.63	0
		50	0	17.67	17.53	17.59	1
		50	25	17.65	17.51	17.57	1
		50	50	17.64	17.50	17.56	1
		100	0	17.65	17.51	17.57	1
20M	16QAM	1	0	17.60	17.43	17.55	1
		1	50	17.63	17.47	17.47	1
		1	99	17.61	17.49	17.45	1
		50	0	16.60	16.44	16.54	2
		50	25	16.62	16.46	16.55	2
		50	50	16.57	16.45	16.53	2
		100	0	16.57	16.39	16.45	2
20M	64QAM	1	0	16.54	16.48	16.55	2
		1	50	16.56	16.40	16.50	2
		1	99	16.58	16.47	16.53	2
		50	0	15.58	15.44	15.55	3
		50	25	15.62	15.41	15.45	3
		50	50	15.63	15.45	15.50	3
		100	0	15.55	15.41	15.48	3
20M	256QAM	1	0	13.75	13.64	13.63	5
		1	50	13.74	13.56	13.63	5
		1	99	13.78	13.62	13.61	5
		50	0	13.76	13.60	13.64	5
		50	25	13.77	13.55	13.69	5
		50	50	13.73	13.65	13.70	5
		100	0	13.72	13.59	13.69	5
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	18.76	18.56	18.67	0
		1	37	18.68	18.60	18.57	0
		1	74	18.61	18.47	18.54	0
		36	0	17.57	17.43	17.53	1
		36	19	17.57	17.49	17.50	1
		36	39	17.64	17.47	17.47	1
		75	0	17.65	17.47	17.50	1
15M	16QAM	1	0	17.55	17.42	17.46	1
		1	37	17.53	17.40	17.43	1
		1	74	17.61	17.45	17.41	1
		36	0	16.56	16.43	16.45	2
		36	19	16.59	16.37	16.52	2
		36	39	16.53	16.37	16.47	2
		75	0	16.47	16.31	16.39	2
15M	64QAM	1	0	16.50	16.46	16.46	2
		1	37	16.46	16.36	16.47	2
		1	74	16.53	16.43	16.43	2
		36	0	15.52	15.35	15.54	3
		36	19	15.54	15.39	15.40	3
		36	39	15.61	15.45	15.44	3
		75	0	15.51	15.37	15.38	3
15M	256QAM	1	0	13.66	13.58	13.58	5
		1	37	13.67	13.58	13.63	5
		1	74	13.75	13.54	13.56	5
		36	0	13.74	13.54	13.57	5
		36	19	13.66	13.55	13.62	5
		36	39	13.65	13.58	13.66	5
		75	0	13.62	13.58	13.58	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	18.71	18.53	18.58	0
		1	24	18.57	18.60	18.54	0
		1	49	18.58	18.47	18.47	0
		25	0	17.55	17.38	17.39	1
		25	12	17.45	17.45	17.37	1
		25	25	17.57	17.39	17.46	1
		50	0	17.61	17.37	17.41	1
10M	16QAM	1	0	17.55	17.27	17.40	1
		1	24	17.42	17.26	17.37	1
		1	49	17.46	17.43	17.34	1
		25	0	16.41	16.28	16.31	2
		25	12	16.56	16.27	16.41	2
		25	25	16.45	16.27	16.47	2
		50	0	16.33	16.25	16.29	2
10M	64QAM	1	0	16.49	16.43	16.44	2
		1	24	16.35	16.23	16.44	2
		1	49	16.53	16.39	16.29	2
		25	0	15.43	15.28	15.49	3
		25	12	15.53	15.35	15.29	3
		25	25	15.54	15.38	15.29	3
		50	0	15.46	15.25	15.34	3
10M	256QAM	1	0	13.70	13.63	13.58	5
		1	24	13.67	13.62	13.67	5
		1	49	13.72	13.53	13.56	5
		25	0	13.66	13.56	13.58	5
		25	12	13.67	13.55	13.68	5
		25	25	13.60	13.63	13.65	5
		50	0	13.62	13.58	13.62	5
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	18.70	18.45	18.46	0
		1	12	18.53	18.55	18.45	0
		1	24	18.56	18.47	18.32	0
		12	0	17.42	17.29	17.29	1
		12	6	17.45	17.42	17.26	1
		12	13	17.58	17.46	17.41	1
		25	0	17.50	17.43	17.30	1
5M	16QAM	1	0	17.54	17.31	17.37	1
		1	12	17.53	17.38	17.39	1
		1	24	17.53	17.44	17.30	1
		12	0	16.46	16.31	16.35	2
		12	6	16.59	16.34	16.39	2
		12	13	16.51	16.35	16.39	2
		25	0	16.42	16.20	16.38	2
5M	64QAM	1	0	16.35	16.37	16.32	2
		1	12	16.33	16.36	16.43	2
		1	24	16.38	16.35	16.38	2
		12	0	15.45	15.34	15.46	3
		12	6	15.45	15.33	15.39	3
		12	13	15.49	15.35	15.41	3
		25	0	15.46	15.34	15.35	3
5M	256QAM	1	0	13.69	13.62	13.60	5
		1	12	13.70	13.64	13.67	5
		1	24	13.66	13.61	13.62	5
		12	0	13.71	13.53	13.64	5
		12	6	13.68	13.61	13.66	5
		12	13	13.63	13.59	13.63	5
		25	0	13.63	13.53	13.63	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	18.76	18.51	18.59	0
		1	7	18.58	18.57	18.56	0
		1	14	18.48	18.32	18.47	0
		8	0	17.57	17.36	17.41	1
		8	3	17.51	17.48	17.38	1
		8	7	17.55	17.47	17.44	1
		15	0	17.61	17.36	17.49	1
3M	16QAM	1	0	17.40	17.40	17.36	1
		1	7	17.44	17.33	17.42	1
		1	14	17.55	17.41	17.36	1
		8	0	16.41	16.38	16.31	2
		8	3	16.49	16.36	16.44	2
		8	7	16.46	16.26	16.44	2
		15	0	16.34	16.19	16.29	2
3M	64QAM	1	0	16.41	16.38	16.38	2
		1	7	16.38	16.30	16.44	2
		1	14	16.50	16.34	16.32	2
		8	0	15.43	15.30	15.41	3
		8	3	15.46	15.35	15.26	3
		8	7	15.56	15.40	15.32	3
		15	0	15.43	15.31	15.28	3
3M	256QAM	1	0	13.68	13.57	13.58	5
		1	7	13.71	13.61	13.65	5
		1	14	13.67	13.58	13.58	5
		8	0	13.68	13.52	13.63	5
		8	3	13.74	13.55	13.68	5
		8	7	13.67	13.59	13.67	5
		15	0	13.61	13.48	13.59	5
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	18.59	18.55	18.53	0
		1	2	18.64	18.56	18.46	0
		1	5	18.53	18.47	18.54	0
		3	0	18.57	18.41	18.51	0
		3	1	18.52	18.39	18.45	0
		3	3	18.60	18.40	18.43	0
		6	0	17.51	17.37	17.46	1
1.4M	16QAM	1	0	17.61	17.35	17.39	1
		1	2	17.65	17.45	17.55	1
		1	5	17.63	17.51	17.52	1
		3	0	17.48	17.54	17.46	1
		3	1	17.62	17.52	17.58	1
		3	3	17.65	17.36	17.50	1
		6	0	16.59	16.38	16.50	2
1.4M	64QAM	1	0	16.60	16.36	16.43	2
		1	2	16.57	16.42	16.47	2
		1	5	16.56	16.46	16.52	2
		3	0	16.68	16.47	16.44	2
		3	1	16.46	16.37	16.52	2
		3	3	16.62	16.40	16.49	2
		6	0	15.59	15.45	15.46	3
1.4M	256QAM	1	0	13.63	13.56	13.59	5
		1	2	13.64	13.61	13.70	5
		1	5	13.72	13.60	13.53	5
		3	0	13.69	13.59	13.61	5
		3	1	13.66	13.59	13.67	5
		3	3	13.63	13.59	13.66	5
		6	0	13.64	13.54	13.62	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	15.57	15.65	15.78	0
		1	50	15.54	15.62	15.75	0
		1	99	15.50	15.58	15.71	0
		50	0	14.67	14.75	14.88	1
		50	25	14.64	14.72	14.85	1
		50	50	14.61	14.69	14.82	1
		100	0	14.54	14.62	14.75	1
20M	16QAM	1	0	14.39	14.51	14.62	1
		1	50	14.52	14.47	14.58	1
		1	99	14.46	14.53	14.53	1
		50	0	13.44	13.60	13.63	2
		50	25	13.44	13.43	13.72	2
		50	50	13.34	13.44	13.64	2
		100	0	13.35	13.45	13.63	2
20M	64QAM	1	0	13.50	13.48	13.54	2
		1	50	13.44	13.40	13.58	2
		1	99	13.34	13.57	13.62	2
		50	0	12.34	12.58	12.59	3
		50	25	12.48	12.49	12.55	3
		50	50	12.41	12.51	12.61	3
		100	0	12.31	12.53	12.61	3
20M	256QAM	1	0	10.54	10.60	10.78	5
		1	50	10.51	10.61	10.78	5
		1	99	10.49	10.55	10.71	5
		50	0	10.50	10.58	10.69	5
		50	25	10.56	10.64	10.75	5
		50	50	10.57	10.65	10.70	5
		100	0	10.50	10.65	10.76	5
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	15.56	15.65	15.69	0
		1	37	15.47	15.54	15.70	0
		1	74	15.44	15.48	15.61	0
		36	0	14.65	14.75	14.86	1
		36	19	14.56	14.69	14.76	1
		36	39	14.52	14.62	14.75	1
		75	0	14.46	14.62	14.74	1
15M	16QAM	1	0	14.32	14.48	14.59	1
		1	37	14.47	14.45	14.56	1
		1	74	14.44	14.48	14.45	1
		36	0	13.37	13.55	13.57	2
		36	19	13.34	13.33	13.66	2
		36	39	13.25	13.34	13.57	2
		75	0	13.25	13.35	13.63	2
15M	64QAM	1	0	13.42	13.46	13.53	2
		1	37	13.35	13.40	13.55	2
		1	74	13.29	13.50	13.62	2
		36	0	12.34	12.48	12.50	3
		36	19	12.40	12.43	12.45	3
		36	39	12.37	12.47	12.55	3
		75	0	12.28	12.53	12.61	3
15M	256QAM	1	0	10.45	10.54	10.69	5
		1	37	10.42	10.55	10.76	5
		1	74	10.47	10.50	10.70	5
		36	0	10.49	10.52	10.61	5
		36	19	10.48	10.57	10.68	5
		36	39	10.52	10.62	10.70	5
		75	0	10.40	10.55	10.67	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	15.44	15.59	15.60	0
		1	24	15.42	15.49	15.62	0
		1	49	15.36	15.39	15.56	0
		25	0	14.54	14.70	14.81	1
		25	12	14.49	14.54	14.64	1
		25	25	14.44	14.52	14.61	1
		50	0	14.38	14.62	14.74	1
10M	16QAM	1	0	14.29	14.48	14.57	1
		1	24	14.35	14.36	14.42	1
		1	49	14.43	14.35	14.38	1
		25	0	13.30	13.49	13.46	2
		25	12	13.28	13.20	13.51	2
		25	25	13.21	13.21	13.46	2
		50	0	13.24	13.31	13.55	2
10M	64QAM	1	0	13.35	13.44	13.45	2
		1	24	13.35	13.31	13.46	2
		1	49	13.16	13.36	13.58	2
		25	0	12.24	12.41	12.49	3
		25	12	12.35	12.40	12.34	3
		25	25	12.32	12.33	12.43	3
		50	0	12.27	12.42	12.51	3
10M	256QAM	1	0	10.46	10.59	10.78	5
		1	24	10.44	10.56	10.69	5
		1	49	10.44	10.52	10.64	5
		25	0	10.44	10.48	10.69	5
		25	12	10.48	10.57	10.67	5
		25	25	10.56	10.62	10.60	5
		50	0	10.46	10.57	10.71	5
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	15.56	15.56	15.59	0
		1	12	15.36	15.54	15.60	0
		1	24	15.35	15.46	15.56	0
		12	0	14.54	14.69	14.67	1
		12	6	14.50	14.67	14.53	1
		12	13	14.50	14.57	14.49	1
		25	0	14.36	14.56	14.69	1
5M	16QAM	1	0	14.19	14.33	14.50	1
		1	12	14.35	14.41	14.56	1
		1	24	14.35	14.46	14.45	1
		12	0	13.28	13.44	13.48	2
		12	6	13.33	13.32	13.65	2
		12	13	13.11	13.29	13.50	2
		25	0	13.24	13.33	13.49	2
5M	64QAM	1	0	13.34	13.34	13.52	2
		1	12	13.34	13.34	13.42	2
		1	24	13.15	13.41	13.59	2
		12	0	12.22	12.41	12.35	3
		12	6	12.34	12.36	12.39	3
		12	13	12.35	12.37	12.48	3
		25	0	12.14	12.44	12.60	3
5M	256QAM	1	0	10.44	10.52	10.69	5
		1	12	10.47	10.54	10.70	5
		1	24	10.49	10.53	10.63	5
		12	0	10.45	10.54	10.62	5
		12	6	10.56	10.64	10.69	5
		12	13	10.50	10.60	10.70	5
		25	0	10.47	10.58	10.76	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	14.81	14.94	15.10	0
		1	50	14.79	14.92	15.08	0
		1	99	14.76	14.89	15.05	0
		50	0	13.78	13.91	14.07	1
		50	25	13.76	13.89	14.05	1
		50	50	13.73	13.86	14.02	1
		100	0	13.74	13.87	14.03	1
20M	16QAM	1	0	13.67	13.66	13.64	1
		1	50	13.65	13.67	13.73	1
		1	99	13.70	13.66	13.70	1
		50	0	12.73	12.64	12.73	2
		50	25	12.65	12.64	12.64	2
		50	50	12.72	12.73	12.65	2
		100	0	12.67	12.68	12.66	2
20M	64QAM	1	0	12.63	12.64	12.70	2
		1	50	12.69	12.68	12.72	2
		1	99	12.72	12.71	12.69	2
		50	0	11.66	11.69	11.65	3
		50	25	11.67	11.63	11.68	3
		50	50	11.64	11.72	11.67	3
		100	0	11.70	11.72	11.65	3
20M	256QAM	1	0	10.02	10.03	10.03	5
		1	50	10.02	10.03	10.03	5
		1	99	10.02	10.02	10.05	5
		50	0	10.00	10.03	9.98	5
		50	25	10.05	10.05	10.05	5
		50	50	9.95	10.02	10.05	5
		100	0	10.01	10.00	9.97	5
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	14.76	14.91	15.05	0
		1	37	14.76	14.86	15.04	0
		1	74	14.74	14.85	15.04	0
		36	0	13.74	13.81	14.01	1
		36	19	13.67	13.84	13.96	1
		36	39	13.66	13.83	13.94	1
		75	0	13.64	13.81	13.95	1
15M	16QAM	1	0	13.67	13.60	13.61	1
		1	37	13.58	13.60	13.73	1
		1	74	13.63	13.59	13.60	1
		36	0	12.68	12.57	12.69	2
		36	19	12.55	12.63	12.64	2
		36	39	12.65	12.66	12.56	2
		75	0	12.64	12.66	12.60	2
15M	64QAM	1	0	12.59	12.55	12.62	2
		1	37	12.69	12.61	12.64	2
		1	74	12.67	12.69	12.61	2
		36	0	11.57	11.65	11.59	3
		36	19	11.64	11.54	11.66	3
		36	39	11.58	11.66	11.57	3
		75	0	11.64	11.65	11.63	3
15M	256QAM	1	0	10.00	10.02	9.98	5
		1	37	9.98	10.00	9.94	5
		1	74	9.96	9.97	10.02	5
		36	0	9.94	9.96	9.93	5
		36	19	10.00	10.05	10.02	5
		36	39	9.90	9.99	10.02	5
		75	0	10.01	9.97	9.94	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	14.64	14.80	15.06	0
		1	24	14.73	14.78	15.02	0
		1	49	14.70	14.85	15.03	0
		25	0	13.68	13.66	13.94	1
		25	12	13.58	13.77	13.87	1
		25	25	13.66	13.69	13.92	1
		50	0	13.57	13.80	13.95	1
10M	16QAM	1	0	13.60	13.53	13.48	1
		1	24	13.46	13.54	13.65	1
		1	49	13.53	13.47	13.59	1
		25	0	12.55	12.56	12.65	2
		25	12	12.55	12.56	12.58	2
		25	25	12.59	12.60	12.43	2
		50	0	12.51	12.62	12.59	2
10M	64QAM	1	0	12.46	12.44	12.50	2
		1	24	12.57	12.61	12.59	2
		1	49	12.55	12.55	12.56	2
		25	0	11.48	11.63	11.50	3
		25	12	11.50	11.46	11.62	3
		25	25	11.54	11.53	11.43	3
		50	0	11.62	11.50	11.62	3
10M	256QAM	1	0	10.02	9.95	10.01	5
		1	24	10.02	9.95	9.94	5
		1	49	10.02	9.94	10.01	5
		25	0	10.00	9.96	9.90	5
		25	12	10.04	9.97	9.95	5
		25	25	9.85	9.97	10.03	5
		50	0	9.99	9.90	9.90	5
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	14.70	14.80	15.03	0
		1	12	14.74	14.82	14.95	0
		1	24	14.69	14.77	14.88	0
		12	0	13.64	13.74	13.85	1
		12	6	13.60	13.82	13.77	1
		12	13	13.61	13.73	13.80	1
		25	0	13.61	13.69	13.86	1
5M	16QAM	1	0	13.67	13.49	13.58	1
		1	12	13.50	13.52	13.66	1
		1	24	13.51	13.59	13.47	1
		12	0	12.54	12.44	12.54	2
		12	6	12.41	12.62	12.57	2
		12	13	12.56	12.64	12.52	2
		25	0	12.58	12.62	12.47	2
5M	64QAM	1	0	12.44	12.41	12.54	2
		1	12	12.54	12.60	12.60	2
		1	24	12.55	12.68	12.52	2
		12	0	11.46	11.57	11.51	3
		12	6	11.58	11.50	11.62	3
		12	13	11.50	11.65	11.52	3
		25	0	11.54	11.57	11.60	3
5M	256QAM	1	0	10.02	10.03	9.97	5
		1	12	10.01	10.03	9.98	5
		1	24	10.02	10.00	9.97	5
		12	0	9.90	9.95	9.94	5
		12	6	10.00	9.97	10.02	5
		12	13	9.86	9.93	10.05	5
		25	0	9.96	9.97	9.92	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	14.70	14.77	15.02	0
		1	7	14.76	14.86	14.94	0
		1	14	14.72	14.73	14.97	0
		8	0	13.61	13.68	13.99	1
		8	3	13.53	13.81	13.81	1
		8	7	13.60	13.77	13.92	1
		15	0	13.56	13.78	13.93	1
3M	16QAM	1	0	13.54	13.60	13.49	1
		1	7	13.45	13.46	13.69	1
		1	14	13.58	13.56	13.48	1
		8	0	12.67	12.50	12.66	2
		8	3	12.49	12.58	12.63	2
		8	7	12.57	12.55	12.47	2
		15	0	12.55	12.63	12.45	2
3M	64QAM	1	0	12.49	12.41	12.62	2
		1	7	12.68	12.52	12.58	2
		1	14	12.53	12.56	12.55	2
		8	0	11.46	11.60	11.53	3
		8	3	11.60	11.52	11.60	3
		8	7	11.55	11.57	11.57	3
		15	0	11.55	11.55	11.51	3
3M	256QAM	1	0	10.02	9.97	9.94	5
		1	7	9.97	9.93	9.99	5
		1	14	10.00	9.93	10.02	5
		8	0	9.98	9.96	9.91	5
		8	3	9.99	9.95	9.96	5
		8	7	9.93	9.92	10.00	5
		15	0	9.93	9.94	9.94	5
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	14.76	14.75	14.90	0
		1	2	14.70	14.81	14.93	0
		1	5	14.61	14.64	14.90	0
		3	0	14.56	14.56	14.71	0
		3	1	14.74	14.68	14.68	0
		3	3	14.57	14.67	14.67	0
		6	0	13.74	13.60	13.67	1
1.4M	16QAM	1	0	13.62	13.63	13.59	1
		1	2	13.61	13.71	13.68	1
		1	5	13.61	13.61	13.68	1
		3	0	13.62	13.59	13.57	1
		3	1	13.56	13.69	13.53	1
		3	3	13.53	13.66	13.66	1
		6	0	12.57	12.72	12.67	2
1.4M	64QAM	1	0	12.64	12.63	12.68	2
		1	2	12.71	12.64	12.61	2
		1	5	12.71	12.57	12.65	2
		3	0	12.65	12.62	12.64	2
		3	1	12.60	12.69	12.58	2
		3	3	12.68	12.60	12.57	2
		6	0	11.46	11.64	11.53	3
1.4M	256QAM	1	0	10.00	9.95	9.99	5
		1	2	9.93	9.98	9.96	5
		1	5	9.99	10.00	10.00	5
		3	0	10.00	9.98	9.93	5
		3	1	10.01	10.03	9.99	5
		3	3	9.85	9.95	10.00	5
		6	0	9.98	9.96	9.94	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
1860	QPSK	1	0		18.52		0
		1	24		18.48		0
		1	49		18.45		0
		25	0		17.44		1
		25	12		17.42		1
		25	25		17.40		1
		50	0		17.41		1
10M	16QAM	1	0		17.31		1
		1	24		17.29		1
		1	49		17.29		1
		25	0		16.26		2
		25	12		16.27		2
		25	25		16.30		2
		50	0		16.32		2
10M	64QAM	1	0		16.30		2
		1	24		16.31		2
		1	49		16.27		2
		25	0		15.32		3
		25	12		15.28		3
		25	25		15.33		3
		50	0		15.24		3
10M	256QAM	1	0		13.34		5
		1	24		13.42		5
		1	49		13.41		5
		25	0		13.38		5
		25	12		13.38		5
		25	25		13.44		5
		50	0		13.41		5
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	18.43	18.44	18.39	0
		1	12	18.34	18.45	18.40	0
		1	24	18.33	18.43	18.32	0
		12	0	17.36	17.39	17.36	1
		12	6	17.31	17.36	17.30	1
		12	13	17.27	17.35	17.33	1
		25	0	17.27	17.38	17.30	1
5M	16QAM	1	0	17.23	17.23	17.26	1
		1	12	17.30	17.20	17.22	1
		1	24	17.23	17.21	17.26	1
		12	0	16.21	16.24	16.21	2
		12	6	16.30	16.20	16.25	2
		12	13	16.24	16.23	16.29	2
		25	0	16.16	16.27	16.26	2
5M	64QAM	1	0	16.30	16.29	16.27	2
		1	12	16.27	16.31	16.19	2
		1	24	16.23	16.22	16.26	2
		12	0	15.24	15.26	15.18	3
		12	6	15.27	15.18	15.26	3
		12	13	15.20	15.27	15.31	3
		25	0	15.21	15.14	15.32	3
5M	256QAM	1	0	13.37	13.40	13.36	5
		1	12	13.37	13.37	13.39	5
		1	24	13.36	13.30	13.35	5
		12	0	13.41	13.37	13.31	5
		12	6	13.28	13.38	13.43	5
		12	13	13.41	13.30	13.34	5
		25	0	13.36	13.29	13.38	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	19.77	19.87	19.81	0
		1	50	19.75	19.85	19.79	0
		1	99	19.71	19.81	19.75	0
		50	0	18.77	18.87	18.81	1
		50	25	18.75	18.85	18.79	1
		50	50	18.72	18.82	18.76	1
		100	0	18.73	18.83	18.77	1
20M	16QAM	1	0	18.64	18.70	18.65	1
		1	50	18.63	18.63	18.69	1
		1	99	18.70	18.71	18.67	1
		50	0	17.67	17.70	17.72	2
		50	25	17.71	17.69	17.62	2
		50	50	17.72	17.64	17.64	2
		100	0	17.69	17.70	17.66	2
20M	64QAM	1	0	17.68	17.72	17.63	2
		1	50	17.71	17.62	17.70	2
		1	99	17.71	17.63	17.64	2
		50	0	16.71	16.72	16.67	3
		50	25	16.72	16.62	16.70	3
		50	50	16.65	16.65	16.66	3
		100	0	16.67	16.62	16.65	3
20M	256QAM	1	0	14.76	14.75	14.76	5
		1	50	14.71	14.71	14.80	5
		1	99	14.74	14.75	14.78	5
		50	0	14.72	14.76	14.75	5
		50	25	14.78	14.76	14.81	5
		50	50	14.76	14.71	14.75	5
		100	0	14.77	14.78	14.71	5
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	19.71	19.81	19.76	0
		1	37	19.69	19.82	19.78	0
		1	74	19.62	19.80	19.68	0
		36	0	18.71	18.79	18.71	1
		36	19	18.72	18.85	18.77	1
		36	39	18.65	18.75	18.72	1
		75	0	18.73	18.79	18.77	1
15M	16QAM	1	0	18.56	18.66	18.55	1
		1	37	18.61	18.59	18.63	1
		1	74	18.66	18.68	18.59	1
		36	0	17.66	17.68	17.68	2
		36	19	17.64	17.65	17.60	2
		36	39	17.68	17.55	17.59	2
		75	0	17.65	17.65	17.60	2
15M	64QAM	1	0	17.66	17.67	17.54	2
		1	37	17.63	17.54	17.69	2
		1	74	17.67	17.58	17.55	2
		36	0	16.63	16.68	16.58	3
		36	19	16.65	16.52	16.67	3
		36	39	16.57	16.63	16.59	3
		75	0	16.67	16.52	16.55	3
15M	256QAM	1	0	14.67	14.75	14.76	5
		1	37	14.70	14.69	14.78	5
		1	74	14.65	14.69	14.74	5
		36	0	14.63	14.74	14.66	5
		36	19	14.74	14.69	14.76	5
		36	39	14.68	14.65	14.70	5
		75	0	14.70	14.76	14.63	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	19.66	19.76	19.64	0
		1	24	19.66	19.78	19.69	0
		1	49	19.52	19.66	19.63	0
		25	0	18.66	18.77	18.65	1
		25	12	18.65	18.73	18.65	1
		25	25	18.50	18.60	18.69	1
		50	0	18.60	18.75	18.65	1
10M	16QAM	1	0	18.53	18.56	18.49	1
		1	24	18.61	18.53	18.49	1
		1	49	18.59	18.59	18.52	1
		25	0	17.63	17.68	17.62	2
		25	12	17.51	17.54	17.55	2
		25	25	17.67	17.53	17.54	2
		50	0	17.57	17.54	17.54	2
10M	64QAM	1	0	17.66	17.53	17.40	2
		1	24	17.56	17.42	17.61	2
		1	49	17.60	17.50	17.48	2
		25	0	16.50	16.58	16.45	3
		25	12	16.61	16.42	16.61	3
		25	25	16.48	16.48	16.54	3
		50	0	16.57	16.40	16.45	3
10M	256QAM	1	0	14.74	14.74	14.69	5
		1	24	14.61	14.69	14.76	5
		1	49	14.66	14.75	14.75	5
		25	0	14.64	14.74	14.74	5
		25	12	14.73	14.71	14.71	5
		25	25	14.70	14.66	14.73	5
		50	0	14.67	14.71	14.65	5
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	19.68	19.75	19.51	0
		1	12	19.55	19.75	19.58	0
		1	24	19.59	19.73	19.53	0
		12	0	18.63	18.70	18.55	1
		12	6	18.57	18.83	18.64	1
		12	13	18.61	18.68	18.61	1
		25	0	18.58	18.78	18.54	1
5M	16QAM	1	0	18.56	18.66	18.49	1
		1	12	18.54	18.56	18.61	1
		1	24	18.53	18.62	18.47	1
		12	0	17.59	17.67	17.61	2
		12	6	17.54	17.54	17.59	2
		12	13	17.64	17.53	17.51	2
		25	0	17.61	17.65	17.52	2
5M	64QAM	1	0	17.61	17.63	17.54	2
		1	12	17.62	17.39	17.68	2
		1	24	17.52	17.48	17.51	2
		12	0	16.60	16.66	16.58	3
		12	6	16.53	16.52	16.61	3
		12	13	16.55	16.62	16.56	3
		25	0	16.67	16.41	16.46	3
5M	256QAM	1	0	14.72	14.74	14.67	5
		1	12	14.64	14.61	14.71	5
		1	24	14.66	14.69	14.74	5
		12	0	14.69	14.74	14.68	5
		12	6	14.73	14.69	14.77	5
		12	13	14.70	14.62	14.75	5
		25	0	14.73	14.77	14.61	5

LTE Conducted Power_ENDC_Laptop_Ant 2

LTE Band 41

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	19.66	19.67	19.71	19.99	19.92	0
		1	50	19.63	19.64	19.68	19.96	19.89	0
		1	99	19.61	19.62	19.66	19.94	19.87	0
		50	0	18.66	18.67	18.71	18.99	18.92	1
		50	25	18.62	18.63	18.67	18.95	18.88	1
		50	50	18.59	18.60	18.64	18.92	18.85	1
		100	0	18.63	18.64	18.68	18.96	18.89	1
20M	16QAM	1	0	18.53	18.56	18.59	18.94	18.84	1
		1	50	18.61	18.55	18.56	18.91	18.78	1
		1	99	18.58	18.55	18.62	18.91	18.79	1
		50	0	17.54	17.57	17.63	17.92	17.86	2
		50	25	17.61	17.60	17.61	17.88	17.80	2
		50	50	17.57	17.57	17.59	17.86	17.83	2
		100	0	17.60	17.52	17.58	17.87	17.78	2
20M	64QAM	1	0	17.52	17.58	17.61	17.87	17.86	2
		1	50	17.57	17.59	17.62	17.92	17.83	2
		1	99	17.61	17.59	17.61	17.92	17.81	2
		50	0	16.52	16.61	16.56	16.91	16.79	3
		50	25	16.51	16.59	16.63	16.84	16.86	3
		50	50	16.54	16.62	16.58	16.84	16.81	3
		100	0	16.54	16.56	16.62	16.93	16.81	3
20M	256QAM	1	0	14.57	14.59	14.61	14.89	14.91	5
		1	50	14.59	14.59	14.63	14.97	14.85	5
		1	99	14.56	14.57	14.71	14.90	14.90	5
		50	0	14.58	14.65	14.63	14.99	14.88	5
		50	25	14.57	14.67	14.70	14.97	14.83	5
		50	50	14.61	14.57	14.63	14.99	14.91	5
		100	0	14.57	14.57	14.68	14.89	14.87	5
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	19.62	19.66	19.70	19.98	19.82	0
		1	37	19.63	19.61	19.60	19.87	19.83	0
		1	74	19.52	19.54	19.63	19.85	19.81	0
		36	0	18.59	18.65	18.64	18.89	18.85	1
		36	19	18.61	18.56	18.62	18.86	18.79	1
		36	39	18.54	18.54	18.56	18.86	18.77	1
		75	0	18.63	18.60	18.59	18.86	18.84	1
15M	16QAM	1	0	18.47	18.55	18.50	18.92	18.75	1
		1	37	18.59	18.50	18.48	18.86	18.71	1
		1	74	18.54	18.53	18.61	18.85	18.76	1
		36	0	17.50	17.53	17.55	17.85	17.76	2
		36	19	17.58	17.53	17.56	17.86	17.75	2
		36	39	17.52	17.54	17.59	17.77	17.83	2
		75	0	17.55	17.43	17.55	17.80	17.75	2
15M	64QAM	1	0	17.48	17.49	17.61	17.81	17.77	2
		1	37	17.50	17.50	17.53	17.88	17.73	2
		1	74	17.60	17.56	17.52	17.92	17.73	2
		36	0	16.44	16.56	16.48	16.84	16.70	3
		36	19	16.42	16.59	16.55	16.75	16.77	3
		36	39	16.44	16.59	16.51	16.75	16.76	3
		75	0	16.45	16.54	16.52	16.92	16.72	3
15M	256QAM	1	0	14.54	14.56	14.54	14.79	14.87	5
		1	37	14.58	14.55	14.54	14.90	14.76	5
		1	74	14.53	14.48	14.64	14.81	14.84	5
		36	0	14.58	14.56	14.63	14.94	14.87	5
		36	19	14.47	14.64	14.69	14.96	14.75	5
		36	39	14.51	14.53	14.63	14.94	14.81	5
		75	0	14.49	14.53	14.60	14.83	14.81	5

LTE Conducted Power_ENDC_Laptop_Ant 2									
LTE Band 41									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	19.62	19.57	19.64	19.95	19.72	0
		1	24	19.62	19.56	19.51	19.81	19.79	0
		1	49	19.50	19.40	19.61	19.76	19.74	0
		25	0	18.45	18.60	18.58	18.87	18.78	1
		25	12	18.54	18.43	18.56	18.82	18.71	1
		25	25	18.46	18.45	18.48	18.76	18.69	1
		50	0	18.63	18.53	18.57	18.82	18.79	1
10M	16QAM	1	0	18.34	18.54	18.44	18.91	18.65	1
		1	24	18.44	18.37	18.44	18.85	18.69	1
		1	49	18.46	18.44	18.60	18.78	18.73	1
		25	0	17.49	17.48	17.45	17.79	17.68	2
		25	12	17.53	17.44	17.56	17.76	17.72	2
		25	25	17.40	17.50	17.49	17.69	17.77	2
		50	0	17.40	17.35	17.53	17.70	17.74	2
10M	64QAM	1	0	17.39	17.38	17.58	17.77	17.73	2
		1	24	17.43	17.50	17.48	17.86	17.68	2
		1	49	17.50	17.50	17.43	17.89	17.71	2
		25	0	16.42	16.53	16.42	16.76	16.61	3
		25	12	16.36	16.59	16.48	16.73	16.70	3
		25	25	16.33	16.45	16.50	16.68	16.70	3
		50	0	16.42	16.39	16.45	16.87	16.62	3
10M	256QAM	1	0	14.47	14.55	14.53	14.89	14.84	5
		1	24	14.52	14.55	14.58	14.91	14.83	5
		1	49	14.48	14.52	14.65	14.84	14.80	5
		25	0	14.55	14.60	14.62	14.99	14.86	5
		25	12	14.56	14.67	14.64	14.90	14.74	5
		25	25	14.52	14.52	14.54	14.94	14.84	5
		50	0	14.51	14.47	14.65	14.87	14.86	5
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	19.54	19.42	19.56	19.89	19.68	0
		1	12	19.54	19.42	19.45	19.72	19.78	0
		1	24	19.42	19.33	19.57	19.72	19.67	0
		12	0	18.46	18.45	18.48	18.81	18.71	1
		12	6	18.48	18.42	18.49	18.77	18.69	1
		12	13	18.41	18.34	18.45	18.69	18.65	1
		25	0	18.56	18.39	18.57	18.79	18.71	1
5M	16QAM	1	0	18.43	18.41	18.40	18.84	18.60	1
		1	12	18.58	18.42	18.41	18.82	18.59	1
		1	24	18.47	18.50	18.52	18.72	18.68	1
		12	0	17.39	17.53	17.40	17.77	17.65	2
		12	6	17.53	17.43	17.55	17.68	17.63	2
		12	13	17.52	17.54	17.48	17.65	17.73	2
		25	0	17.42	17.42	17.49	17.68	17.73	2
5M	64QAM	1	0	17.45	17.49	17.53	17.71	17.73	2
		1	12	17.48	17.46	17.41	17.85	17.66	2
		1	24	17.51	17.56	17.43	17.87	17.64	2
		12	0	16.43	16.56	16.38	16.70	16.55	3
		12	6	16.41	16.58	16.39	16.69	16.66	3
		12	13	16.39	16.44	16.41	16.58	16.65	3
		25	0	16.43	16.49	16.36	16.80	16.58	3
5M	256QAM	1	0	14.47	14.50	14.54	14.85	14.91	5
		1	12	14.59	14.52	14.63	14.89	14.81	5
		1	24	14.54	14.51	14.65	14.80	14.82	5
		12	0	14.49	14.64	14.54	14.93	14.83	5
		12	6	14.54	14.65	14.61	14.87	14.83	5
		12	13	14.53	14.53	14.58	14.91	14.88	5
		25	0	14.51	14.53	14.65	14.89	14.78	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	19.48	19.43	19.36	0
		1	50	19.44	19.39	19.32	0
		1	99	19.41	19.36	19.29	0
		50	0	18.52	18.47	18.40	1
		50	25	18.50	18.45	18.38	1
		50	50	18.47	18.42	18.35	1
		100	0	18.48	18.43	18.36	1
20M	16QAM	1	0	18.39	18.32	18.32	1
		1	50	18.43	18.41	18.24	1
		1	99	18.45	18.37	18.31	1
		50	0	17.41	17.37	17.26	2
		50	25	17.45	17.36	17.31	2
		50	50	17.38	17.40	17.27	2
		100	0	17.40	17.32	17.30	2
20M	64QAM	1	0	17.45	17.35	17.29	2
		1	50	17.39	17.39	17.24	2
		1	99	17.40	17.33	17.25	2
		50	0	16.41	16.39	16.28	3
		50	25	16.43	16.34	16.24	3
		50	50	16.38	16.32	16.25	3
		100	0	16.45	16.35	16.24	3
20M	256QAM	1	0	14.42	14.43	14.28	5
		1	50	14.48	14.37	14.33	5
		1	99	14.42	14.39	14.27	5
		50	0	14.41	14.37	14.30	5
		50	25	14.48	14.41	14.32	5
		50	50	14.46	14.40	14.34	5
		100	0	14.38	14.35	14.27	5
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	19.45	19.42	19.31	0
		1	37	19.34	19.35	19.26	0
		1	74	19.31	19.31	19.23	0
		36	0	18.49	18.45	18.30	1
		36	19	18.46	18.43	18.31	1
		36	39	18.45	18.34	18.26	1
		75	0	18.42	18.42	18.35	1
15M	16QAM	1	0	18.29	18.23	18.22	1
		1	37	18.42	18.31	18.14	1
		1	74	18.43	18.30	18.23	1
		36	0	17.37	17.28	17.25	2
		36	19	17.37	17.30	17.22	2
		36	39	17.33	17.34	17.20	2
		75	0	17.37	17.25	17.21	2
15M	64QAM	1	0	17.44	17.29	17.22	2
		1	37	17.38	17.37	17.16	2
		1	74	17.38	17.29	17.21	2
		36	0	16.32	16.30	16.25	3
		36	19	16.38	16.30	16.23	3
		36	39	16.28	16.25	16.22	3
		75	0	16.40	16.34	16.23	3
15M	256QAM	1	0	14.35	14.43	14.23	5
		1	37	14.48	14.34	14.27	5
		1	74	14.36	14.38	14.18	5
		36	0	14.34	14.30	14.27	5
		36	19	14.39	14.38	14.24	5
		36	39	14.44	14.35	14.34	5
		Report No.: SFBEDW-WTW-P221101675		1	0	14.28	14.26

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	19.32	19.35	19.11	0
		1	24	19.29	19.33	19.08	0
		1	49	19.31	19.17	19.14	0
		25	0	18.36	18.43	18.13	1
		25	12	18.38	18.39	18.12	1
		25	25	18.41	18.25	18.13	1
		50	0	18.39	18.28	18.10	1
10M	16QAM	1	0	18.29	18.12	18.09	1
		1	24	18.27	18.29	18.12	1
		1	49	18.28	18.28	18.22	1
		25	0	17.28	17.19	17.25	2
		25	12	17.37	17.26	17.09	2
		25	25	17.31	17.28	17.09	2
		50	0	17.22	17.20	17.13	2
10M	64QAM	1	0	17.35	17.17	17.17	2
		1	24	17.33	17.26	17.16	2
		1	49	17.25	17.20	17.17	2
		25	0	16.25	16.17	16.13	3
		25	12	16.24	16.28	16.13	3
		25	25	16.23	16.10	16.15	3
		50	0	16.34	16.22	16.20	3
10M	256QAM	1	0	14.37	14.40	14.25	5
		1	24	14.45	14.37	14.33	5
		1	49	14.34	14.35	14.25	5
		25	0	14.31	14.31	14.20	5
		25	12	14.38	14.37	14.24	5
		25	25	14.37	14.35	14.34	5
		50	0	14.29	14.28	14.20	5
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	19.38	19.39	19.17	0
		1	12	19.34	19.28	19.22	0
		1	24	19.31	19.30	19.21	0
		12	0	18.42	18.43	18.18	1
		12	6	18.33	18.36	18.28	1
		12	13	18.41	18.24	18.17	1
		25	0	18.27	18.41	18.33	1
5M	16QAM	1	0	18.15	18.16	18.21	1
		1	12	18.28	18.24	18.09	1
		1	24	18.29	18.22	18.09	1
		12	0	17.22	17.25	17.24	2
		12	6	17.24	17.29	17.07	2
		12	13	17.22	17.33	17.15	2
		25	0	17.30	17.20	17.19	2
5M	64QAM	1	0	17.33	17.17	17.15	2
		1	12	17.26	17.25	17.04	2
		1	24	17.31	17.24	17.20	2
		12	0	16.25	16.23	16.16	3
		12	6	16.30	16.21	16.13	3
		12	13	16.21	16.15	16.10	3
		25	0	16.35	16.21	16.12	3
5M	256QAM	1	0	14.40	14.35	14.21	5
		1	12	14.38	14.29	14.33	5
		1	24	14.34	14.34	14.23	5
		12	0	14.36	14.31	14.21	5
		12	6	14.44	14.39	14.23	5
		12	13	14.44	14.37	14.30	5
		25	0	14.31	14.25	14.21	5

LTE Conducted Power_ENDC_Laptop_Ant 2							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	19.40	19.40	19.21	0
		1	7	19.35	19.25	19.12	0
		1	14	19.18	19.29	19.14	0
		8	0	18.37	18.36	18.27	1
		8	3	18.26	18.30	18.29	1
		8	7	18.36	18.31	18.20	1
		15	0	18.26	18.36	18.25	1
3M	16QAM	1	0	18.34	18.20	18.11	1
		1	7	18.33	18.29	18.08	1
		1	14	18.36	18.33	18.19	1
		8	0	17.27	17.18	17.09	2
		8	3	17.38	17.23	17.25	2
		8	7	17.21	17.21	17.13	2
		15	0	17.33	17.17	17.11	2
3M	64QAM	1	0	17.31	17.19	17.14	2
		1	7	17.29	17.26	17.01	2
		1	14	17.31	17.18	17.19	2
		8	0	16.24	16.37	16.22	3
		8	3	16.31	16.14	16.13	3
		8	7	16.25	16.23	16.17	3
		15	0	16.35	16.25	16.10	3
3M	256QAM	1	0	14.32	14.34	14.26	5
		1	7	14.48	14.30	14.28	5
		1	14	14.35	14.39	14.18	5
		8	0	14.39	14.31	14.24	5
		8	3	14.42	14.41	14.31	5
		8	7	14.41	14.35	14.27	5
		15	0	14.30	14.35	14.21	5
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	19.45	19.32	19.23	0
		1	2	19.41	19.31	19.31	0
		1	5	19.39	19.34	19.25	0
		3	0	19.32	19.32	19.13	0
		3	1	19.23	19.28	19.29	0
		3	3	19.32	19.32	19.28	0
		6	0	18.39	18.39	18.46	1
1.4M	16QAM	1	0	18.38	18.49	18.48	1
		1	2	18.34	18.39	18.42	1
		1	5	18.36	18.40	18.41	1
		3	0	18.33	18.31	18.38	1
		3	1	18.33	18.42	18.38	1
		3	3	18.46	18.44	18.44	1
		6	0	17.43	17.35	17.45	2
1.4M	64QAM	1	0	17.38	17.35	17.46	2
		1	2	17.39	17.30	17.46	2
		1	5	17.43	17.28	17.43	2
		3	0	17.36	17.30	17.41	2
		3	1	17.33	17.34	17.35	2
		3	3	17.34	17.43	17.36	2
		6	0	16.25	16.46	16.50	3
1.4M	256QAM	1	0	14.41	14.35	14.24	5
		1	2	14.43	14.35	14.24	5
		1	5	14.42	14.29	14.21	5
		3	0	14.32	14.36	14.27	5
		3	1	14.44	14.40	14.23	5
		3	3	14.45	14.38	14.24	5
		6	0	14.29	14.30	14.18	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	12.75	12.69	12.85	0
		1	50	12.69	12.63	12.79	0
		1	99	12.65	12.59	12.75	0
		50	0	11.85	11.79	11.95	1
		50	25	11.84	11.78	11.94	1
		50	50	11.82	11.76	11.92	1
		100	0	11.81	11.75	11.91	1
20M	16QAM	1	0	11.70	11.69	11.71	1
		1	50	11.74	11.74	11.64	1
		1	99	11.71	11.66	11.66	1
		50	0	10.72	10.67	10.64	2
		50	25	10.69	10.72	10.69	2
		50	50	10.66	10.72	10.73	2
		100	0	10.70	10.68	10.71	2
20M	64QAM	1	0	10.73	10.71	10.65	2
		1	50	10.68	10.72	10.72	2
		1	99	10.65	10.64	10.69	2
		50	0	9.71	9.68	9.70	3
		50	25	9.69	9.71	9.72	3
		50	50	9.69	9.64	9.68	3
		100	0	9.65	9.67	9.67	3
20M	256QAM	1	0	7.75	7.66	7.76	5
		1	50	7.70	7.74	7.72	5
		1	99	7.70	7.66	7.73	5
		50	0	7.69	7.73	7.67	5
		50	25	7.68	7.66	7.68	5
		50	50	7.71	7.74	7.75	5
		100	0	7.68	7.71	7.76	5
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	12.62	12.53	12.67	0
		1	37	12.51	12.50	12.58	0
		1	74	12.41	12.55	12.68	0
		36	0	11.72	11.68	11.85	1
		36	19	11.72	11.78	11.82	1
		36	39	11.75	11.71	11.81	1
		75	0	11.64	11.60	11.76	1
15M	16QAM	1	0	11.55	11.60	11.66	1
		1	37	11.64	11.59	11.53	1
		1	74	11.67	11.52	11.43	1
		36	0	10.63	10.50	10.52	2
		36	19	10.60	10.55	10.50	2
		36	39	10.50	10.55	10.64	2
		75	0	10.67	10.44	10.57	2
15M	64QAM	1	0	10.71	10.57	10.59	2
		1	37	10.49	10.59	10.59	2
		1	74	10.53	10.52	10.47	2
		36	0	9.50	9.57	9.54	3
		36	19	9.55	9.59	9.61	3
		36	39	9.59	9.44	9.51	3
		75	0	9.54	9.54	9.47	3
15M	256QAM	1	0	7.74	7.61	7.76	5
		1	37	7.68	7.71	7.62	5
		1	74	7.64	7.65	7.69	5
		36	0	7.67	7.67	7.61	5
		36	19	7.59	7.66	7.65	5
		36	39	7.69	7.68	7.66	5
		36	0	7.60	7.66	7.67	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	12.67	12.66	12.59	0
		1	24	12.48	12.52	12.48	0
		1	49	12.52	12.45	12.55	0
		25	0	11.66	11.59	11.81	1
		25	12	11.72	11.66	11.69	1
		25	25	11.76	11.63	11.78	1
		50	0	11.69	11.62	11.67	1
10M	16QAM	1	0	11.61	11.63	11.56	1
		1	24	11.69	11.56	11.51	1
		1	49	11.58	11.49	11.51	1
		25	0	10.65	10.51	10.54	2
		25	12	10.56	10.67	10.57	2
		25	25	10.52	10.70	10.57	2
		50	0	10.59	10.45	10.57	2
10M	64QAM	1	0	10.59	10.65	10.59	2
		1	24	10.58	10.68	10.56	2
		1	49	10.51	10.39	10.59	2
		25	0	9.58	9.63	9.60	3
		25	12	9.62	9.65	9.55	3
		25	25	9.57	9.41	9.48	3
		50	0	9.46	9.63	9.60	3
10M	256QAM	1	0	7.69	7.57	7.68	5
		1	24	7.66	7.74	7.63	5
		1	49	7.62	7.64	7.63	5
		25	0	7.64	7.71	7.63	5
		25	12	7.64	7.56	7.60	5
		25	25	7.63	7.67	7.74	5
		50	0	7.66	7.67	7.68	5
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	12.68	12.62	12.65	0
		1	12	12.50	12.48	12.58	0
		1	24	12.56	12.42	12.74	0
		12	0	11.65	11.71	11.85	1
		12	6	11.74	11.78	11.81	1
		12	13	11.80	11.64	11.87	1
		25	0	11.73	11.69	11.67	1
5M	16QAM	1	0	11.63	11.53	11.63	1
		1	12	11.57	11.65	11.55	1
		1	24	11.68	11.56	11.55	1
		12	0	10.69	10.53	10.53	2
		12	6	10.62	10.68	10.59	2
		12	13	10.50	10.69	10.65	2
		25	0	10.57	10.54	10.47	2
5M	64QAM	1	0	10.58	10.67	10.51	2
		1	12	10.58	10.64	10.62	2
		1	24	10.45	10.49	10.54	2
		12	0	9.49	9.62	9.54	3
		12	6	9.62	9.58	9.48	3
		12	13	9.53	9.50	9.49	3
		25	0	9.47	9.63	9.54	3
5M	256QAM	1	0	7.71	7.56	7.71	5
		1	12	7.70	7.68	7.67	5
		1	24	7.66	7.59	7.64	5
		12	0	7.62	7.68	7.64	5
		12	6	7.68	7.62	7.67	5
		12	13	7.70	7.65	7.69	5
		25	0	7.64	7.63	7.68	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	12.65	12.62	12.77	0
		1	7	12.60	12.55	12.69	0
		1	14	12.55	12.53	12.65	0
		8	0	11.85	11.69	11.95	1
		8	3	11.78	11.69	11.94	1
		8	7	11.76	11.76	11.86	1
		15	0	11.74	11.75	11.86	1
3M	16QAM	1	0	11.69	11.67	11.64	1
		1	7	11.73	11.70	11.63	1
		1	14	11.68	11.59	11.59	1
		8	0	10.72	10.67	10.54	2
		8	3	10.65	10.63	10.62	2
		8	7	10.61	10.63	10.68	2
		15	0	10.62	10.64	10.70	2
3M	64QAM	1	0	10.68	10.67	10.62	2
		1	7	10.66	10.70	10.72	2
		1	14	10.55	10.62	10.59	2
		8	0	9.61	9.68	9.60	3
		8	3	9.68	9.61	9.67	3
		8	7	9.69	9.56	9.62	3
		15	0	9.64	9.63	9.57	3
3M	256QAM	1	0	7.75	7.73	7.76	5
		1	7	7.67	7.72	7.74	5
		1	14	7.72	7.76	7.68	5
		8	0	7.67	7.71	7.75	5
		8	3	7.71	7.66	7.72	5
		8	7	7.76	7.75	7.67	5
		15	0	7.67	7.71	7.71	5
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	12.67	12.57	12.74	0
		1	2	12.48	12.43	12.65	0
		1	5	12.46	12.39	12.59	0
		3	0	12.66	12.56	12.62	0
		3	1	12.66	12.66	12.56	0
		3	3	12.65	12.49	12.57	0
		6	0	11.64	11.54	11.62	1
1.4M	16QAM	1	0	11.56	11.60	11.62	1
		1	2	11.53	11.60	11.51	1
		1	5	11.63	11.63	11.69	1
		3	0	11.65	11.61	11.55	1
		3	1	11.63	11.65	11.58	1
		3	3	11.60	11.62	11.62	1
		6	0	10.59	10.66	10.53	2
1.4M	64QAM	1	0	10.62	10.59	10.51	2
		1	2	10.56	10.47	10.51	2
		1	5	10.64	10.56	10.58	2
		3	0	10.57	10.64	10.69	2
		3	1	10.50	10.59	10.63	2
		3	3	10.63	10.57	10.57	2
		6	0	9.63	9.60	9.58	3
1.4M	256QAM	1	0	7.66	7.66	7.67	5
		1	2	7.67	7.67	7.59	5
		1	5	7.72	7.69	7.65	5
		3	0	7.68	7.74	7.65	5
		3	1	7.59	7.63	7.71	5
		3	3	7.66	7.60	7.57	5
		6	0	7.73	7.68	7.65	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	14.93	14.82	14.71	0
		1	50	14.86	14.75	14.64	0
		1	99	14.84	14.73	14.62	0
		50	0	13.77	13.66	13.55	1
		50	25	13.75	13.64	13.53	1
		50	50	13.73	13.62	13.51	1
		100	0	13.74	13.63	13.52	1
20M	16QAM	1	0	13.45	13.51	13.47	1
		1	50	13.43	13.44	13.50	1
		1	99	13.51	13.51	13.44	1
		50	0	12.49	12.52	12.44	2
		50	25	12.46	12.53	12.46	2
		50	50	12.48	12.45	12.45	2
		100	0	12.45	12.53	12.52	2
20M	64QAM	1	0	12.49	12.45	12.51	2
		1	50	12.45	12.49	12.46	2
		1	99	12.50	12.44	12.51	2
		50	0	11.46	11.47	11.52	3
		50	25	11.53	11.47	11.52	3
		50	50	11.53	11.51	11.47	3
		100	0	11.55	11.47	11.51	3
20M	256QAM	1	0	9.96	9.93	9.87	5
		1	50	9.87	9.87	9.90	5
		1	99	9.90	9.92	9.96	5
		50	0	9.88	9.87	9.89	5
		50	25	9.93	9.91	9.87	5
		50	50	9.95	9.93	9.87	5
		100	0	9.88	9.87	9.92	5
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	14.65	14.77	14.85	0
		1	37	14.64	14.66	14.84	0
		1	74	14.56	14.68	14.82	0
		36	0	13.45	13.65	13.73	1
		36	19	13.45	13.63	13.69	1
		36	39	13.49	13.60	13.67	1
		75	0	13.44	13.57	13.68	1
15M	16QAM	1	0	13.40	13.50	13.44	1
		1	37	13.37	13.42	13.42	1
		1	74	13.42	13.44	13.36	1
		36	0	12.40	12.42	12.36	2
		36	19	12.36	12.52	12.39	2
		36	39	12.40	12.38	12.37	2
		75	0	12.43	12.43	12.48	2
15M	64QAM	1	0	12.46	12.44	12.42	2
		1	37	12.42	12.49	12.39	2
		1	74	12.40	12.38	12.51	2
		36	0	11.45	11.46	11.46	3
		36	19	11.49	11.40	11.47	3
		36	39	11.47	11.44	11.45	3
		75	0	11.51	11.42	11.44	3
15M	256QAM	1	0	9.89	9.95	9.94	5
		1	37	9.85	9.93	9.84	5
		1	74	9.91	9.84	9.83	5
		36	0	9.83	9.89	9.84	5
		36	19	9.94	9.85	9.86	5
		36	39	9.87	9.83	9.80	5
		75	0	9.85	9.92	9.79	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	14.55	14.68	14.89	0
		1	24	14.54	14.58	14.75	0
		1	49	14.53	14.68	14.70	0
		25	0	13.32	13.52	13.62	1
		25	12	13.37	13.58	13.65	1
		25	25	13.47	13.60	13.55	1
		50	0	13.40	13.51	13.63	1
10M	16QAM	1	0	13.30	13.47	13.44	1
		1	24	13.37	13.40	13.28	1
		1	49	13.31	13.32	13.23	1
		25	0	12.27	12.36	12.35	2
		25	12	12.31	12.49	12.30	2
		25	25	12.30	12.25	12.36	2
		50	0	12.43	12.33	12.47	2
10M	64QAM	1	0	12.38	12.37	12.34	2
		1	24	12.39	12.38	12.34	2
		1	49	12.30	12.36	12.36	2
		25	0	11.30	11.33	11.37	3
		25	12	11.46	11.35	11.36	3
		25	25	11.46	11.40	11.31	3
		50	0	11.47	11.29	11.34	3
10M	256QAM	1	0	9.82	9.86	9.90	5
		1	24	9.82	9.86	9.84	5
		1	49	9.89	9.85	9.92	5
		25	0	9.82	9.85	9.81	5
		25	12	9.86	9.88	9.76	5
		25	25	9.80	9.85	9.85	5
		50	0	9.85	9.87	9.86	5
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	14.53	14.67	14.88	0
		1	12	14.61	14.58	14.70	0
		1	24	14.56	14.59	14.62	0
		12	0	13.37	13.60	13.62	1
		12	6	13.31	13.62	13.54	1
		12	13	13.47	13.50	13.43	1
		25	0	13.42	13.53	13.57	1
5M	16QAM	1	0	13.34	13.36	13.31	1
		1	12	13.25	13.41	13.42	1
		1	24	13.30	13.34	13.23	1
		12	0	12.38	12.39	12.22	2
		12	6	12.26	12.43	12.35	2
		12	13	12.39	12.28	12.30	2
		25	0	12.36	12.35	12.38	2
5M	64QAM	1	0	12.34	12.34	12.39	2
		1	12	12.36	12.34	12.26	2
		1	24	12.28	12.33	12.49	2
		12	0	11.32	11.38	11.40	3
		12	6	11.38	11.36	11.36	3
		12	13	11.45	11.38	11.45	3
		25	0	11.51	11.41	11.35	3
5M	256QAM	1	0	9.85	9.92	9.87	5
		1	12	9.92	9.88	9.82	5
		1	24	9.91	9.81	9.92	5
		12	0	9.79	9.93	9.82	5
		12	6	9.89	9.82	9.80	5
		12	13	9.85	9.84	9.81	5
		25	0	9.89	9.86	9.76	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	14.56	14.64	14.82	0
		1	7	14.64	14.55	14.78	0
		1	14	14.42	14.59	14.73	0
		8	0	13.43	13.54	13.61	1
		8	3	13.38	13.62	13.67	1
		8	7	13.36	13.46	13.54	1
		15	0	13.37	13.51	13.68	1
3M	16QAM	1	0	13.30	13.35	13.42	1
		1	7	13.35	13.33	13.42	1
		1	14	13.32	13.41	13.23	1
		8	0	12.27	12.38	12.21	2
		8	3	12.35	12.39	12.36	2
		8	7	12.35	12.35	12.36	2
		15	0	12.31	12.33	12.44	2
3M	64QAM	1	0	12.36	12.41	12.29	2
		1	7	12.27	12.43	12.25	2
		1	14	12.37	12.28	12.37	2
		8	0	11.40	11.39	11.45	3
		8	3	11.38	11.31	11.32	3
		8	7	11.45	11.44	11.37	3
		15	0	11.41	11.32	11.31	3
3M	256QAM	1	0	9.83	9.89	9.92	5
		1	7	9.86	9.82	9.89	5
		1	14	9.94	9.94	9.81	5
		8	0	9.94	9.88	9.91	5
		8	3	9.85	9.92	9.92	5
		8	7	9.84	9.83	9.82	5
		15	0	9.93	9.87	9.87	5
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	14.70	14.69	14.81	0
		1	2	14.56	14.57	14.71	0
		1	5	14.49	14.60	14.72	0
		3	0	14.49	14.45	14.45	0
		3	1	14.47	14.44	14.55	0
		3	3	14.47	14.55	14.44	0
		6	0	13.54	13.47	13.56	1
1.4M	16QAM	1	0	13.61	13.53	13.63	1
		1	2	13.61	13.47	13.47	1
		1	5	13.50	13.44	13.62	1
		3	0	13.49	13.62	13.51	1
		3	1	13.52	13.51	13.43	1
		3	3	13.56	13.47	13.52	1
		6	0	12.56	12.59	12.55	2
1.4M	64QAM	1	0	12.47	12.52	12.46	2
		1	2	12.47	12.47	12.59	2
		1	5	12.53	12.43	12.58	2
		3	0	12.46	12.56	12.45	2
		3	1	12.55	12.59	12.43	2
		3	3	12.53	12.46	12.55	2
		6	0	11.41	11.52	11.52	3
1.4M	256QAM	1	0	9.73	9.80	9.79	5
		1	2	9.78	9.77	9.81	5
		1	5	9.74	9.74	9.74	5
		3	0	9.77	9.74	9.73	5
		3	1	9.78	9.76	9.72	5
		3	3	9.79	9.75	9.73	5
		6	0	9.78	9.76	9.73	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	14.96	14.95	14.93	0
		1	24	14.94	14.93	14.91	0
		1	49	14.91	14.90	14.88	0
		25	0	13.95	13.94	13.92	1
		25	12	13.94	13.93	13.91	1
		25	25	13.92	13.91	13.89	1
		50	0	13.94	13.93	13.91	1
10M	16QAM	1	0	13.85	13.85	13.79	1
		1	24	13.79	13.83	13.88	1
		1	49	13.88	13.79	13.88	1
		25	0	12.86	12.81	12.87	2
		25	12	12.85	12.88	12.87	2
		25	25	12.84	12.89	12.83	2
		50	0	12.86	12.84	12.80	2
10M	64QAM	1	0	12.86	12.88	12.85	2
		1	24	12.80	12.88	12.80	2
		1	49	12.89	12.81	12.80	2
		25	0	11.86	11.86	11.86	3
		25	12	11.82	11.86	11.79	3
		25	25	11.81	11.88	11.82	3
		50	0	11.83	11.87	11.82	3
10M	256QAM	1	0	9.89	9.83	9.92	5
		1	24	9.90	9.84	9.88	5
		1	49	9.89	9.87	9.88	5
		25	0	9.89	9.91	9.92	5
		25	12	9.82	9.83	9.85	5
		25	25	9.90	9.89	9.85	5
		50	0	9.84	9.88	9.86	5
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	14.87	14.95	14.90	0
		1	12	14.88	14.87	14.81	0
		1	24	14.85	14.90	14.83	0
		12	0	13.86	13.85	13.84	1
		12	6	13.93	13.84	13.88	1
		12	13	13.90	13.88	13.79	1
		25	0	13.86	13.92	13.86	1
5M	16QAM	1	0	13.83	13.76	13.74	1
		1	12	13.70	13.81	13.88	1
		1	24	13.88	13.72	13.83	1
		12	0	12.86	12.81	12.77	2
		12	6	12.76	12.78	12.80	2
		12	13	12.77	12.87	12.74	2
		25	0	12.86	12.75	12.72	2
5M	64QAM	1	0	12.86	12.88	12.84	2
		1	12	12.80	12.79	12.77	2
		1	24	12.84	12.81	12.78	2
		12	0	11.85	11.84	11.83	3
		12	6	11.78	11.81	11.76	3
		12	13	11.80	11.82	11.78	3
		25	0	11.83	11.77	11.74	3
5M	256QAM	1	0	9.76	9.84	9.83	5
		1	12	9.85	9.85	9.83	5
		1	24	9.82	9.75	9.81	5
		12	0	9.78	9.85	9.78	5
		12	6	9.81	9.77	9.79	5
		12	13	9.76	9.86	9.85	5
		25	0	9.88	9.85	9.91	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 5							
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	14.81	14.91	14.81	0
		1	7	14.84	14.80	14.59	0
		1	14	14.72	14.87	14.69	0
		8	0	13.86	13.74	13.73	1
		8	3	13.93	13.74	13.72	1
		8	7	13.80	13.81	13.71	1
		15	0	13.77	13.88	13.65	1
3M	16QAM	1	0	13.75	13.65	13.71	1
		1	7	13.60	13.81	13.88	1
		1	14	13.87	13.69	13.72	1
		8	0	12.79	12.70	12.73	2
		8	3	12.73	12.70	12.79	2
		8	7	12.62	12.84	12.65	2
		15	0	12.80	12.60	12.72	2
3M	64QAM	1	0	12.72	12.84	12.72	2
		1	7	12.78	12.68	12.76	2
		1	14	12.76	12.73	12.68	2
		8	0	11.77	11.70	11.72	3
		8	3	11.68	11.67	11.67	3
		8	7	11.78	11.74	11.73	3
		15	0	11.73	11.62	11.74	3
3M	256QAM	1	0	9.77	9.78	9.83	5
		1	7	9.90	9.83	9.84	5
		1	14	9.86	9.78	9.77	5
		8	0	9.87	9.79	9.82	5
		8	3	9.85	9.76	9.82	5
		8	7	9.74	9.86	9.78	5
		15	0	9.84	9.90	9.84	5
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	14.84	14.76	14.77	0
		1	2	14.78	14.86	14.78	0
		1	5	14.86	14.85	14.82	0
		3	0	14.71	14.73	14.73	0
		3	1	14.68	14.80	14.77	0
		3	3	14.67	14.79	14.75	0
		6	0	13.79	13.71	13.81	1
1.4M	16QAM	1	0	13.63	13.78	13.77	1
		1	2	13.71	13.76	13.79	1
		1	5	13.72	13.73	13.69	1
		3	0	13.75	13.82	13.68	1
		3	1	13.74	13.70	13.76	1
		3	3	13.69	13.83	13.80	1
		6	0	12.79	12.81	12.71	2
1.4M	64QAM	1	0	12.74	12.70	12.79	2
		1	2	12.66	12.72	12.75	2
		1	5	12.74	12.66	12.68	2
		3	0	12.72	12.74	12.66	2
		3	1	12.87	12.75	12.77	2
		3	3	12.65	12.79	12.80	2
		6	0	11.64	11.63	11.68	3
1.4M	256QAM	1	0	9.89	9.88	9.87	5
		1	2	9.83	9.84	9.86	5
		1	5	9.91	9.89	9.88	5
		3	0	9.88	9.89	9.83	5
		3	1	9.91	9.87	9.84	5
		3	3	9.92	9.85	9.89	5
		6	0	9.88	9.86	9.85	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	9.73	9.61	9.76	0
		1	50	9.71	9.59	9.74	0
		1	99	9.68	9.56	9.71	0
		50	0	8.75	8.63	8.78	1
		50	25	8.72	8.60	8.75	1
		50	50	8.70	8.58	8.73	1
		100	0	8.72	8.60	8.75	1
20M	16QAM	1	0	8.58	8.53	8.59	1
		1	50	8.54	8.53	8.57	1
		1	99	8.55	8.54	8.54	1
		50	0	7.55	7.54	7.57	2
		50	25	7.57	7.57	7.62	2
		50	50	7.53	7.60	7.59	2
		100	0	7.57	7.52	7.54	2
20M	64QAM	1	0	7.62	7.54	7.56	2
		1	50	7.54	7.55	7.57	2
		1	99	7.55	7.55	7.55	2
		50	0	6.52	6.60	6.52	3
		50	25	6.59	6.55	6.55	3
		50	50	6.53	6.61	6.59	3
		100	0	6.62	6.60	6.57	3
20M	256QAM	1	0	4.55	4.60	4.56	5
		1	50	4.56	4.63	4.62	5
		1	99	4.56	4.58	4.62	5
		50	0	4.57	4.62	4.61	5
		50	25	4.63	4.63	4.62	5
		50	50	4.65	4.58	4.61	5
		100	0	4.64	4.61	4.57	5
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	9.67	9.52	9.73	0
		1	37	9.67	9.56	9.64	0
		1	74	9.62	9.49	9.71	0
		36	0	8.75	8.63	8.73	1
		36	19	8.71	8.56	8.69	1
		36	39	8.70	8.48	8.64	1
		75	0	8.62	8.59	8.67	1
15M	16QAM	1	0	8.49	8.47	8.58	1
		1	37	8.53	8.51	8.56	1
		1	74	8.46	8.44	8.52	1
		36	0	7.49	7.50	7.57	2
		36	19	7.55	7.53	7.53	2
		36	39	7.50	7.53	7.55	2
		75	0	7.56	7.44	7.52	2
15M	64QAM	1	0	7.60	7.45	7.51	2
		1	37	7.54	7.48	7.49	2
		1	74	7.49	7.46	7.46	2
		36	0	6.49	6.54	6.49	3
		36	19	6.59	6.53	6.53	3
		36	39	6.50	6.61	6.49	3
		75	0	6.60	6.55	6.55	3
15M	256QAM	1	0	4.57	4.65	4.62	5
		1	37	4.55	4.61	4.55	5
		1	74	4.63	4.59	4.61	5
		36	0	4.64	4.61	4.57	5
		36	19	4.56	4.63	4.60	5
		36	39	4.65	4.55	4.57	5
		75	0	4.55	4.62	4.64	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	9.57	9.50	9.63	0
		1	24	9.65	9.44	9.58	0
		1	49	9.55	9.41	9.67	0
		25	0	8.71	8.59	8.62	1
		25	12	8.65	8.53	8.60	1
		25	25	8.55	8.40	8.50	1
		50	0	8.54	8.49	8.65	1
10M	16QAM	1	0	8.42	8.37	8.51	1
		1	24	8.45	8.42	8.51	1
		1	49	8.39	8.29	8.50	1
		25	0	7.37	7.42	7.48	2
		25	12	7.52	7.43	7.43	2
		25	25	7.37	7.45	7.42	2
		50	0	7.51	7.29	7.39	2
10M	64QAM	1	0	7.52	7.42	7.43	2
		1	24	7.41	7.47	7.37	2
		1	49	7.38	7.38	7.40	2
		25	0	6.36	6.47	6.47	3
		25	12	6.53	6.52	6.50	3
		25	25	6.38	6.51	6.37	3
		50	0	6.49	6.51	6.45	3
10M	256QAM	1	0	4.48	4.65	4.61	5
		1	24	4.46	4.53	4.51	5
		1	49	4.59	4.58	4.52	5
		25	0	4.56	4.52	4.57	5
		25	12	4.52	4.56	4.51	5
		25	25	4.56	4.46	4.54	5
		50	0	4.54	4.54	4.57	5
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	9.62	9.40	9.51	0
		1	12	9.53	9.49	9.50	0
		1	24	9.54	9.44	9.52	0
		12	0	8.75	8.59	8.60	1
		12	6	8.65	8.45	8.50	1
		12	13	8.61	8.46	8.47	1
		25	0	8.52	8.44	8.62	1
5M	16QAM	1	0	8.41	8.40	8.51	1
		1	12	8.51	8.50	8.47	1
		1	24	8.43	8.36	8.37	1
		12	0	7.39	7.40	7.42	2
		12	6	7.46	7.41	7.49	2
		12	13	7.46	7.42	7.42	2
		25	0	7.50	7.34	7.46	2
5M	64QAM	1	0	7.57	7.33	7.36	2
		1	12	7.47	7.48	7.37	2
		1	24	7.48	7.40	7.33	2
		12	0	6.35	6.41	6.44	3
		12	6	6.56	6.49	6.39	3
		12	13	6.41	6.53	6.46	3
		25	0	6.58	6.40	6.52	3
5M	256QAM	1	0	4.49	4.64	4.55	5
		1	12	4.50	4.54	4.53	5
		1	24	4.57	4.57	4.60	5
		12	0	4.54	4.53	4.56	5
		12	6	4.48	4.60	4.58	5
		12	13	4.59	4.45	4.50	5
		25	0	4.48	4.62	4.58	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	16.49	16.35	16.32	0
		1	24	16.47	16.33	16.30	0
		1	49	16.45	16.31	16.28	0
		25	0	15.48	15.34	15.31	1
		25	12	15.45	15.31	15.28	1
		25	25	15.43	15.29	15.26	1
		50	0	15.42	15.28	15.25	1
10M	16QAM	1	0	15.16	15.22	15.14	1
		1	24	15.24	15.16	15.21	1
		1	49	15.15	15.20	15.17	1
		25	0	14.22	14.22	14.20	2
		25	12	14.22	14.19	14.23	2
		25	25	14.17	14.22	14.15	2
		50	0	14.24	14.15	14.18	2
10M	64QAM	1	0	14.14	14.14	14.16	2
		1	24	14.15	14.22	14.20	2
		1	49	14.23	14.23	14.21	2
		25	0	13.14	13.18	13.22	3
		25	12	13.16	13.19	13.18	3
		25	25	13.19	13.17	13.17	3
		50	0	13.19	13.24	13.23	3
10M	256QAM	1	0	11.34	11.35	11.33	5
		1	24	11.32	11.34	11.41	5
		1	49	11.33	11.32	11.41	5
		25	0	11.41	11.36	11.37	5
		25	12	11.37	11.32	11.35	5
		25	25	11.42	11.35	11.39	5
		50	0	11.38	11.33	11.42	5
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	16.40	16.28	16.32	0
		1	12	16.41	16.26	16.21	0
		1	24	16.36	16.31	16.24	0
		12	0	15.38	15.30	15.31	1
		12	6	15.35	15.22	15.24	1
		12	13	15.34	15.26	15.18	1
		25	0	15.39	15.19	15.24	1
5M	16QAM	1	0	15.09	15.22	15.04	1
		1	12	15.22	15.14	15.14	1
		1	24	15.08	15.19	15.08	1
		12	0	14.19	14.18	14.16	2
		12	6	14.17	14.16	14.20	2
		12	13	14.10	14.18	14.07	2
		25	0	14.16	14.09	14.14	2
5M	64QAM	1	0	14.13	14.14	14.10	2
		1	12	14.05	14.16	14.18	2
		1	24	14.15	14.22	14.15	2
		12	0	13.07	13.14	13.21	3
		12	6	13.14	13.18	13.18	3
		12	13	13.13	13.11	13.16	3
		25	0	13.19	13.17	13.17	3
5M	256QAM	1	0	11.24	11.30	11.29	5
		1	12	11.26	11.30	11.32	5
		1	24	11.30	11.25	11.40	5
		12	0	11.39	11.34	11.31	5
		12	6	11.29	11.23	11.33	5
		12	13	11.34	11.27	11.33	5
		25	0	11.29	11.26	11.40	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 12							
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		700.5	707.5	714.5	
3M	QPSK	1	0	16.26	16.18	16.20	0
		1	7	16.36	16.19	16.12	0
		1	14	16.30	16.28	16.21	0
		8	0	15.27	15.19	15.27	1
		8	3	15.21	15.14	15.23	1
		8	7	15.24	15.14	15.18	1
		15	0	15.37	15.09	15.13	1
3M	16QAM	1	0	15.05	15.15	14.90	1
		1	7	15.19	15.03	15.07	1
		1	14	14.93	15.05	15.03	1
		8	0	14.11	14.16	14.15	2
		8	3	14.15	14.16	14.11	2
		8	7	14.07	14.08	13.98	2
		15	0	14.04	14.01	14.08	2
3M	64QAM	1	0	13.99	14.02	13.98	2
		1	7	14.03	14.09	14.04	2
		1	14	14.07	14.16	14.12	2
		8	0	13.03	13.01	13.11	3
		8	3	13.09	13.05	13.05	3
		8	7	13.06	12.96	13.03	3
		15	0	13.19	13.15	13.10	3
3M	256QAM	1	0	11.27	11.31	11.31	5
		1	7	11.24	11.32	11.40	5
		1	14	11.28	11.28	11.40	5
		8	0	11.38	11.29	11.32	5
		8	3	11.29	11.28	11.33	5
		8	7	11.37	11.29	11.36	5
		15	0	11.38	11.24	11.33	5
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	16.30	16.16	16.25	0
		1	2	16.28	16.19	16.20	0
		1	5	16.30	16.26	16.21	0
		3	0	16.11	16.20	16.09	0
		3	1	16.19	16.11	16.08	0
		3	3	16.05	16.03	16.21	0
		6	0	15.09	15.12	15.11	1
1.4M	16QAM	1	0	15.08	15.20	15.18	1
		1	2	15.10	15.12	15.09	1
		1	5	15.03	15.23	15.09	1
		3	0	15.06	15.13	15.17	1
		3	1	15.15	15.09	15.10	1
		3	3	15.21	15.09	15.07	1
		6	0	14.06	14.05	14.16	2
1.4M	64QAM	1	0	14.20	14.15	14.15	2
		1	2	14.09	14.23	14.10	2
		1	5	14.17	14.16	14.22	2
		3	0	14.22	14.09	14.16	2
		3	1	14.05	14.17	14.13	2
		3	3	14.06	14.17	14.02	2
		6	0	14.08	14.10	14.04	3
1.4M	256QAM	1	0	11.33	11.35	11.24	5
		1	2	11.30	11.29	11.36	5
		1	5	11.29	11.30	11.41	5
		3	0	11.31	11.32	11.37	5
		3	1	11.29	11.25	11.29	5
		3	3	11.38	11.34	11.35	5
		6	0	11.35	11.30	11.35	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		15.95		0
		1	24		15.93		0
		1	49		15.91		0
		25	0		14.86		1
		25	12		14.84		1
		25	25		14.81		1
		50	0		14.82		1
10M	16QAM	1	0		14.66		1
		1	24		14.67		1
		1	49		14.75		1
		25	0		13.72		2
		25	12		13.76		2
		25	25		13.73		2
		50	0		13.66		2
10M	64QAM	1	0		13.70		2
		1	24		13.72		2
		1	49		13.74		2
		25	0		12.73		3
		25	12		12.69		3
		25	25		12.67		3
		50	0		12.72		3
10M	256QAM	1	0		10.84		5
		1	24		10.81		5
		1	49		10.81		5
		25	0		10.83		5
		25	12		10.90		5
		25	25		10.91		5
		50	0		10.83		5
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	15.82	15.94	15.86	0
		1	12	15.80	15.92	15.82	0
		1	24	15.84	15.90	15.87	0
		12	0	14.76	14.86	14.75	1
		12	6	14.73	14.74	14.77	1
		12	13	14.71	14.73	14.76	1
		25	0	14.76	14.81	14.77	1
5M	16QAM	1	0	14.70	14.61	14.63	1
		1	12	14.65	14.67	14.70	1
		1	24	14.64	14.67	14.71	1
		12	0	13.66	13.64	13.68	2
		12	6	13.67	13.75	13.75	2
		12	13	13.63	13.66	13.66	2
		25	0	13.60	13.61	13.65	2
5M	64QAM	1	0	13.68	13.68	13.67	2
		1	12	13.67	13.72	13.70	2
		1	24	13.69	13.66	13.59	2
		12	0	12.74	12.65	12.64	3
		12	6	12.66	12.65	12.75	3
		12	13	12.60	12.63	12.70	3
		25	0	12.62	12.70	12.64	3
5M	256QAM	1	0	10.71	10.81	10.79	5
		1	12	10.80	10.81	10.73	5
		1	24	10.71	10.83	10.75	5
		12	0	10.77	10.84	10.79	5
		12	6	10.74	10.83	10.91	5
		12	13	10.80	10.79	10.87	5
		25	0	10.79	10.87	10.85	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		15.98		0
		1	24		15.95		0
		1	49		15.91		0
		25	0		14.95		1
		25	12		14.92		1
		25	25		14.91		1
		50	0		14.93		1
10M	16QAM	1	0		14.86		1
		1	24		14.80		1
		1	49		14.78		1
		25	0		13.86		2
		25	12		13.82		2
		25	25		13.76		2
		50	0		13.82		2
10M	64QAM	1	0		13.78		2
		1	24		13.77		2
		1	49		13.85		2
		25	0		12.80		3
		25	12		12.77		3
		25	25		12.84		3
		50	0		12.81		3
10M	256QAM	1	0		10.94		5
		1	24		10.90		5
		1	49		10.86		5
		25	0		10.88		5
		25	12		10.94		5
		25	25		10.92		5
		50	0		10.90		5
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	15.86	15.97	15.89	0
		1	12	15.83	15.89	15.91	0
		1	24	15.77	15.91	15.82	0
		12	0	14.83	14.87	14.83	1
		12	6	14.83	14.83	14.87	1
		12	13	14.77	14.84	14.78	1
		25	0	14.87	14.87	14.81	1
5M	16QAM	1	0	14.79	14.81	14.77	1
		1	12	14.75	14.77	14.69	1
		1	24	14.74	14.72	14.77	1
		12	0	13.70	13.84	13.75	2
		12	6	13.78	13.79	13.74	2
		12	13	13.73	13.72	13.76	2
		25	0	13.79	13.78	13.73	2
5M	64QAM	1	0	13.79	13.72	13.83	2
		1	12	13.75	13.69	13.77	2
		1	24	13.81	13.78	13.67	2
		12	0	12.76	12.76	12.85	3
		12	6	12.76	12.71	12.74	3
		12	13	12.71	12.80	12.74	3
		25	0	12.72	12.71	12.69	3
5M	256QAM	1	0	10.86	10.90	10.95	5
		1	12	10.91	10.91	10.85	5
		1	24	10.95	10.92	10.88	5
		12	0	10.90	10.91	10.94	5
		12	6	10.88	10.85	10.87	5
		12	13	10.92	10.95	10.91	5
		25	0	10.90	10.90	10.95	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	16.45	16.41	16.44	0
		1	24	16.43	16.39	16.42	0
		1	49	16.41	16.37	16.40	0
		25	0	15.31	15.27	15.30	1
		25	12	15.28	15.24	15.27	1
		25	25	15.26	15.22	15.25	1
		50	0	15.29	15.25	15.28	1
10M	16QAM	1	0	15.20	15.16	15.24	1
		1	24	15.21	15.22	15.19	1
		1	49	15.24	15.22	15.24	1
		25	0	14.15	14.22	14.21	2
		25	12	14.23	14.16	14.16	2
		25	25	14.16	14.15	14.22	2
		50	0	14.16	14.17	14.15	2
10M	64QAM	1	0	14.17	14.20	14.23	2
		1	24	14.14	14.15	14.18	2
		1	49	14.16	14.24	14.14	2
		25	0	13.18	13.21	13.15	3
		25	12	13.15	13.23	13.24	3
		25	25	13.20	13.18	13.22	3
		50	0	13.17	13.19	13.15	3
10M	256QAM	1	0	11.36	11.38	11.31	5
		1	24	11.31	11.35	11.34	5
		1	49	11.32	11.37	11.36	5
		25	0	11.38	11.33	11.37	5
		25	12	11.35	11.33	11.39	5
		25	25	11.36	11.36	11.30	5
		50	0	11.31	11.37	11.29	5
BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	
5M	QPSK	1	0	16.34	16.30	16.30	0
		1	12	16.19	16.24	16.29	0
		1	24	16.18	16.29	16.35	0
		12	0	15.26	15.20	15.13	1
		12	6	15.23	15.06	15.14	1
		12	13	15.10	15.11	15.16	1
		25	0	15.14	15.13	15.12	1
5M	16QAM	1	0	15.15	15.00	15.09	1
		1	12	15.07	15.06	15.09	1
		1	24	15.19	15.07	15.01	1
		12	0	13.90	14.05	14.00	2
		12	6	14.11	14.13	13.94	2
		12	13	14.06	13.94	14.06	2
		25	0	13.98	14.03	13.98	2
5M	64QAM	1	0	13.98	14.01	14.06	2
		1	12	14.02	14.00	14.06	2
		1	24	13.98	14.17	14.04	2
		12	0	13.07	13.07	13.08	3
		12	6	13.03	13.23	13.12	3
		12	13	13.03	13.05	13.16	3
		25	0	13.09	13.14	12.98	3
5M	256QAM	1	0	11.32	11.35	11.27	5
		1	12	11.27	11.34	11.31	5
		1	24	11.25	11.34	11.36	5
		12	0	11.28	11.23	11.35	5
		12	6	11.30	11.30	11.35	5
		12	13	11.28	11.27	11.21	5
		25	0	11.24	11.31	11.21	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	13.68	13.74	13.84	0
		1	50	13.63	13.69	13.79	0
		1	99	13.59	13.65	13.75	0
		50	0	12.71	12.77	12.87	1
		50	25	12.68	12.74	12.84	1
		50	50	12.66	12.72	12.82	1
		100	0	12.67	12.73	12.83	1
20M	16QAM	1	0	12.68	12.67	12.68	1
		1	50	12.63	12.69	12.70	1
		1	99	12.71	12.69	12.66	1
		50	0	11.71	11.65	11.71	2
		50	25	11.71	11.61	11.62	2
		50	50	11.66	11.71	11.69	2
		100	0	11.61	11.61	11.61	2
20M	64QAM	1	0	11.62	11.71	11.61	2
		1	50	11.65	11.68	11.69	2
		1	99	11.71	11.64	11.66	2
		50	0	10.71	10.65	10.66	3
		50	25	10.65	10.69	10.65	3
		50	50	10.71	10.70	10.62	3
		100	0	10.68	10.70	10.71	3
20M	256QAM	1	0	8.72	8.77	8.75	5
		1	50	8.80	8.78	8.76	5
		1	99	8.81	8.81	8.80	5
		50	0	8.75	8.77	8.74	5
		50	25	8.78	8.75	8.76	5
		50	50	8.77	8.80	8.80	5
		100	0	8.78	8.75	8.81	5
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	13.62	13.71	13.75	0
		1	37	13.46	13.56	13.68	0
		1	74	13.48	13.49	13.71	0
		36	0	12.55	12.56	12.70	1
		36	19	12.51	12.65	12.76	1
		36	39	12.55	12.56	12.69	1
		75	0	12.59	12.56	12.73	1
15M	16QAM	1	0	12.57	12.45	12.47	1
		1	37	12.53	12.46	12.67	1
		1	74	12.58	12.54	12.57	1
		36	0	11.53	11.53	11.64	2
		36	19	11.66	11.45	11.48	2
		36	39	11.58	11.62	11.59	2
		75	0	11.51	11.49	11.54	2
15M	64QAM	1	0	11.47	11.61	11.40	2
		1	37	11.56	11.61	11.51	2
		1	74	11.64	11.47	11.46	2
		36	0	10.62	10.56	10.48	3
		36	19	10.51	10.59	10.55	3
		36	39	10.50	10.66	10.45	3
		75	0	10.51	10.55	10.67	3
15M	256QAM	1	0	8.71	8.68	8.65	5
		1	37	8.70	8.75	8.67	5
		1	74	8.71	8.71	8.80	5
		36	0	8.71	8.71	8.72	5
		36	19	8.74	8.71	8.72	5
		36	39	8.75	8.74	8.79	5
		75	0	8.73	8.66	8.81	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	13.62	13.73	13.66	0
		1	24	13.53	13.55	13.68	0
		1	49	13.44	13.44	13.61	0
		25	0	12.51	12.60	12.67	1
		25	12	12.47	12.70	12.67	1
		25	25	12.54	12.59	12.57	1
		50	0	12.48	12.67	12.69	1
10M	16QAM	1	0	12.48	12.52	12.52	1
		1	24	12.40	12.48	12.59	1
		1	49	12.69	12.53	12.52	1
		25	0	11.62	11.58	11.68	2
		25	12	11.64	11.45	11.51	2
		25	25	11.52	11.62	11.51	2
		50	0	11.61	11.47	11.44	2
10M	64QAM	1	0	11.52	11.47	11.36	2
		1	24	11.44	11.54	11.61	2
		1	49	11.63	11.61	11.45	2
		25	0	10.57	10.54	10.58	3
		25	12	10.49	10.58	10.51	3
		25	25	10.53	10.64	10.53	3
		50	0	10.56	10.57	10.56	3
10M	256QAM	1	0	8.63	8.76	8.75	5
		1	24	8.74	8.77	8.73	5
		1	49	8.74	8.72	8.80	5
		25	0	8.66	8.74	8.66	5
		25	12	8.70	8.66	8.70	5
		25	25	8.68	8.71	8.77	5
		50	0	8.72	8.69	8.75	5
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	13.56	13.68	13.76	0
		1	12	13.52	13.56	13.68	0
		1	24	13.37	13.53	13.61	0
		12	0	12.51	12.64	12.70	1
		12	6	12.46	12.61	12.81	1
		12	13	12.53	12.67	12.72	1
		25	0	12.49	12.61	12.66	1
5M	16QAM	1	0	12.46	12.46	12.61	1
		1	12	12.50	12.53	12.66	1
		1	24	12.62	12.49	12.43	1
		12	0	11.58	11.49	11.60	2
		12	6	11.67	11.54	11.56	2
		12	13	11.59	11.65	11.62	2
		25	0	11.46	11.52	11.43	2
5M	64QAM	1	0	11.44	11.54	11.49	2
		1	12	11.48	11.59	11.51	2
		1	24	11.60	11.53	11.55	2
		12	0	10.50	10.59	10.58	3
		12	6	10.60	10.58	10.54	3
		12	13	10.58	10.52	10.51	3
		25	0	10.53	10.60	10.57	3
5M	256QAM	1	0	8.66	8.76	8.75	5
		1	12	8.77	8.68	8.73	5
		1	24	8.72	8.75	8.72	5
		12	0	8.72	8.74	8.70	5
		12	6	8.76	8.70	8.67	5
		12	13	8.67	8.73	8.73	5
		25	0	8.72	8.69	8.80	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	13.59	13.58	13.69	0
		1	7	13.51	13.55	13.64	0
		1	14	13.35	13.42	13.67	0
		8	0	12.57	12.61	12.72	1
		8	3	12.65	12.58	12.65	1
		8	7	12.48	12.53	12.77	1
		15	0	12.58	12.60	12.62	1
3M	16QAM	1	0	12.49	12.53	12.50	1
		1	7	12.45	12.55	12.61	1
		1	14	12.65	12.54	12.61	1
		8	0	11.66	11.50	11.51	2
		8	3	11.62	11.45	11.50	2
		8	7	11.63	11.54	11.63	2
		15	0	11.58	11.38	11.53	2
3M	64QAM	1	0	11.53	11.56	11.50	2
		1	7	11.46	11.52	11.62	2
		1	14	11.53	11.49	11.56	2
		8	0	10.66	10.46	10.53	3
		8	3	10.56	10.62	10.49	3
		8	7	10.54	10.65	10.54	3
		15	0	10.56	10.69	10.59	3
3M	256QAM	1	0	8.65	8.67	8.65	5
		1	7	8.77	8.68	8.75	5
		1	14	8.76	8.81	8.77	5
		8	0	8.65	8.75	8.70	5
		8	3	8.72	8.73	8.67	5
		8	7	8.73	8.78	8.75	5
		15	0	8.78	8.65	8.71	5
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	13.47	13.65	13.70	0
		1	2	13.50	13.57	13.75	0
		1	5	13.53	13.51	13.68	0
		3	0	13.39	13.50	13.50	0
		3	1	13.48	13.54	13.48	0
		3	3	13.51	13.40	13.44	0
		6	0	12.49	12.55	12.54	1
1.4M	16QAM	1	0	12.42	12.59	12.39	1
		1	2	12.43	12.48	12.43	1
		1	5	12.44	12.47	12.53	1
		3	0	12.48	12.48	12.42	1
		3	1	12.49	12.50	12.48	1
		3	3	12.51	12.45	12.49	1
		6	0	11.50	11.50	11.56	2
1.4M	64QAM	1	0	11.56	11.43	11.46	2
		1	2	11.50	11.58	11.50	2
		1	5	11.51	11.42	11.48	2
		3	0	11.58	11.47	11.59	2
		3	1	11.51	11.48	11.46	2
		3	3	11.57	11.49	11.58	2
		6	0	10.45	10.56	10.71	3
1.4M	256QAM	1	0	8.67	8.70	8.74	5
		1	2	8.70	8.68	8.70	5
		1	5	8.79	8.79	8.77	5
		3	0	8.66	8.70	8.73	5
		3	1	8.70	8.75	8.72	5
		3	3	8.67	8.79	8.75	5
		6	0	8.77	8.73	8.71	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	15.07	15.02	14.97	0
		1	37	15.04	14.99	14.94	0
		1	74	15.01	14.96	14.91	0
		36	0	14.07	14.02	13.97	1
		36	19	14.04	13.99	13.94	1
		36	39	14.02	13.97	13.92	1
		75	0	14.03	13.98	13.93	1
15M	16QAM	1	0	13.88	13.82	13.84	1
		1	37	13.88	13.84	13.84	1
		1	74	13.87	13.86	13.91	1
		36	0	12.90	12.83	12.89	2
		36	19	12.89	12.88	12.89	2
		36	39	12.91	12.91	12.85	2
		75	0	12.89	12.87	12.85	2
15M	64QAM	1	0	12.86	12.87	12.86	2
		1	37	12.90	12.82	12.87	2
		1	74	12.91	12.86	12.90	2
		36	0	11.91	11.92	11.86	3
		36	19	11.92	11.91	11.83	3
		36	39	11.88	11.88	11.92	3
		75	0	11.88	11.84	11.85	3
15M	256QAM	1	0	9.94	9.92	9.93	5
		1	37	10.00	9.93	9.94	5
		1	74	9.98	9.97	9.92	5
		36	0	9.93	9.98	9.92	5
		36	19	9.97	10.00	9.94	5
		36	39	9.95	10.01	9.94	5
		75	0	9.99	10.02	9.96	5
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	15.00	15.01	14.92	0
		1	24	14.98	14.94	14.91	0
		1	49	14.99	14.86	14.89	0
		25	0	13.98	14.01	13.88	1
		25	12	13.99	13.96	13.85	1
		25	25	14.01	13.94	13.82	1
		50	0	13.99	13.90	13.92	1
10M	16QAM	1	0	13.88	13.81	13.75	1
		1	24	13.80	13.79	13.74	1
		1	49	13.78	13.78	13.82	1
		25	0	12.80	12.76	12.86	2
		25	12	12.79	12.83	12.82	2
		25	25	12.90	12.89	12.85	2
		50	0	12.84	12.82	12.83	2
10M	64QAM	1	0	12.79	12.87	12.76	2
		1	24	12.84	12.72	12.83	2
		1	49	12.87	12.79	12.83	2
		25	0	11.85	11.88	11.79	3
		25	12	11.89	11.88	11.80	3
		25	25	11.82	11.78	11.85	3
		50	0	11.88	11.79	11.75	3
10M	256QAM	1	0	9.85	9.86	9.89	5
		1	24	9.92	9.83	9.85	5
		1	49	9.90	9.94	9.86	5
		25	0	9.84	9.92	9.86	5
		25	12	9.88	9.94	9.84	5
		25	25	9.85	9.97	9.88	5
		25	0	9.97	9.99	9.92	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	14.85	14.95	14.83	0
		1	12	14.85	14.92	14.76	0
		1	24	14.87	14.81	14.86	0
		12	0	13.91	13.91	13.80	1
		12	6	13.93	13.85	13.74	1
		12	13	13.91	13.86	13.73	1
		25	0	13.89	13.88	13.90	1
5M	16QAM	1	0	13.73	13.70	13.75	1
		1	12	13.73	13.73	13.73	1
		1	24	13.68	13.69	13.69	1
		12	0	12.66	12.75	12.80	2
		12	6	12.71	12.80	12.78	2
		12	13	12.82	12.80	12.83	2
		25	0	12.84	12.76	12.74	2
5M	64QAM	1	0	12.67	12.75	12.73	2
		1	12	12.78	12.61	12.80	2
		1	24	12.81	12.75	12.72	2
		12	0	11.76	11.75	11.74	3
		12	6	11.79	11.74	11.78	3
		12	13	11.78	11.64	11.70	3
		25	0	11.81	11.74	11.72	3
5M	256QAM	1	0	9.92	9.85	9.85	5
		1	12	9.91	9.87	9.89	5
		1	24	9.94	9.97	9.85	5
		12	0	9.92	9.92	9.90	5
		12	6	9.88	9.91	9.94	5
		12	13	9.86	10.00	9.84	5
		25	0	9.98	9.98	9.86	5
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	14.89	14.88	14.73	0
		1	7	14.84	14.87	14.73	0
		1	14	14.84	14.84	14.72	0
		8	0	13.90	14.01	13.77	1
		8	3	13.87	13.93	13.59	1
		8	7	14.01	13.83	13.66	1
		15	0	13.90	13.86	13.78	1
3M	16QAM	1	0	13.82	13.72	13.69	1
		1	7	13.79	13.78	13.66	1
		1	14	13.66	13.67	13.81	1
		8	0	12.80	12.71	12.73	2
		8	3	12.71	12.78	12.67	2
		8	7	12.83	12.76	12.85	2
		15	0	12.69	12.67	12.73	2
3M	64QAM	1	0	12.70	12.85	12.66	2
		1	7	12.79	12.59	12.81	2
		1	14	12.81	12.69	12.80	2
		8	0	11.74	11.88	11.64	3
		8	3	11.79	11.86	11.70	3
		8	7	11.68	11.71	11.73	3
		15	0	11.85	11.71	11.75	3
3M	256QAM	1	0	9.87	9.88	9.83	5
		1	7	9.98	9.84	9.84	5
		1	14	9.91	9.93	9.87	5
		8	0	9.85	9.93	9.88	5
		8	3	9.92	9.99	9.90	5
		8	7	9.95	9.99	9.84	5
		15	0	9.97	10.02	9.92	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	15.02	14.91	14.84	0
		1	2	14.91	14.89	14.71	0
		1	5	14.90	14.94	14.87	0
		3	0	14.86	14.80	14.88	0
		3	1	14.77	14.85	14.91	0
		3	3	14.83	14.83	14.85	0
		6	0	13.81	13.81	13.81	1
1.4M	16QAM	1	0	13.79	13.77	13.73	1
		1	2	13.84	13.87	13.88	1
		1	5	13.79	13.80	13.72	1
		3	0	13.75	13.79	13.80	1
		3	1	13.76	13.88	13.84	1
		3	3	13.76	13.87	13.77	1
		6	0	12.81	12.88	12.84	2
1.4M	64QAM	1	0	12.73	12.82	12.81	2
		1	2	12.81	12.78	12.87	2
		1	5	12.69	12.81	12.85	2
		3	0	12.74	12.75	12.74	2
		3	1	12.71	12.80	12.86	2
		3	3	12.67	12.90	12.72	2
		6	0	11.84	11.75	11.83	3
1.4M	256QAM	1	0	9.88	9.82	9.91	5
		1	2	9.99	9.85	9.84	5
		1	5	9.97	9.90	9.82	5
		3	0	9.91	9.98	9.84	5
		3	1	9.87	9.97	9.91	5
		3	3	9.92	9.91	9.86	5
		6	0	9.94	9.94	9.91	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		10.88		0
		1	24		10.85		0
		1	49		10.81		0
		25	0		9.74		1
		25	12		9.72		1
		25	25		9.71		1
		50	0		9.69		1
10M	16QAM	1	0		9.58		1
		1	24		9.53		1
		1	49		9.56		1
		25	0		8.51		2
		25	12		8.61		2
		25	25		8.54		2
		50	0		8.58		2
10M	64QAM	1	0		8.54		2
		1	24		8.52		2
		1	49		8.57		2
		25	0		7.59		3
		25	12		7.57		3
		25	25		7.51		3
		50	0		7.52		3
10M	256QAM	1	0		5.67		5
		1	24		5.69		5
		1	49		5.68		5
		25	0		5.68		5
		25	12		5.63		5
		25	25		5.62		5
		50	0		5.68		5
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	10.82	10.87	10.81	0
		1	12	10.72	10.80	10.74	0
		1	24	10.66	10.73	10.77	0
		12	0	9.64	9.62	9.58	1
		12	6	9.64	9.66	9.64	1
		12	13	9.64	9.61	9.59	1
		25	0	9.57	9.65	9.63	1
5M	16QAM	1	0	9.57	9.52	9.52	1
		1	12	9.51	9.44	9.52	1
		1	24	9.47	9.50	9.43	1
		12	0	8.48	8.45	8.59	2
		12	6	8.56	8.60	8.47	2
		12	13	8.56	8.48	8.54	2
		25	0	8.42	8.54	8.56	2
5M	64QAM	1	0	8.53	8.53	8.52	2
		1	12	8.54	8.49	8.47	2
		1	24	8.44	8.49	8.49	2
		12	0	7.50	7.51	7.47	3
		12	6	7.45	7.50	7.54	3
		12	13	7.45	7.47	7.56	3
		25	0	7.52	7.52	7.54	3
5M	256QAM	1	0	5.63	5.62	5.57	5
		1	12	5.59	5.63	5.64	5
		1	24	5.57	5.66	5.64	5
		12	0	5.65	5.65	5.58	5
		12	6	5.64	5.56	5.68	5
		12	13	5.63	5.54	5.60	5
		25	0	5.54	5.64	5.59	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	13.73	13.78	13.75	0
		1	50	13.68	13.73	13.70	0
		1	99	13.66	13.71	13.68	0
		50	0	12.77	12.82	12.79	1
		50	25	12.74	12.79	12.76	1
		50	50	12.70	12.75	12.72	1
		100	0	12.74	12.79	12.76	1
20M	16QAM	1	0	12.70	12.72	12.73	1
		1	50	12.66	12.66	12.66	1
		1	99	12.65	12.67	12.69	1
		50	0	11.72	11.70	11.67	2
		50	25	11.71	11.71	11.64	2
		50	50	11.64	11.68	11.65	2
		100	0	11.70	11.72	11.70	2
20M	64QAM	1	0	11.63	11.72	11.67	2
		1	50	11.70	11.73	11.68	2
		1	99	11.70	11.71	11.72	2
		50	0	10.67	10.69	10.69	3
		50	25	10.66	10.69	10.73	3
		50	50	10.64	10.66	10.68	3
		100	0	10.67	10.73	10.66	3
20M	256QAM	1	0	8.69	8.74	8.68	5
		1	50	8.66	8.72	8.72	5
		1	99	8.71	8.67	8.73	5
		50	0	8.67	8.71	8.75	5
		50	25	8.67	8.73	8.66	5
		50	50	8.67	8.69	8.75	5
		100	0	8.69	8.71	8.74	5
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	13.65	13.72	13.74	0
		1	37	13.60	13.64	13.61	0
		1	74	13.65	13.69	13.58	0
		36	0	12.76	12.75	12.79	1
		36	19	12.65	12.72	12.72	1
		36	39	12.68	12.73	12.64	1
		75	0	12.69	12.77	12.75	1
15M	16QAM	1	0	12.62	12.67	12.72	1
		1	37	12.66	12.66	12.59	1
		1	74	12.61	12.65	12.59	1
		36	0	11.69	11.69	11.59	2
		36	19	11.61	11.68	11.60	2
		36	39	11.55	11.64	11.60	2
		75	0	11.60	11.65	11.63	2
15M	64QAM	1	0	11.58	11.69	11.57	2
		1	37	11.62	11.64	11.66	2
		1	74	11.68	11.65	11.67	2
		36	0	10.58	10.65	10.59	3
		36	19	10.59	10.68	10.69	3
		36	39	10.59	10.57	10.66	3
		75	0	10.63	10.68	10.64	3
15M	256QAM	1	0	8.66	8.72	8.65	5
		1	37	8.56	8.66	8.68	5
		1	74	8.62	8.63	8.64	5
		36	0	8.63	8.62	8.66	5
		36	19	8.61	8.65	8.65	5
		36	39	8.65	8.63	8.70	5
		75	0	8.62	8.68	8.73	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	13.63	13.59	13.74	0
		1	24	13.56	13.59	13.54	0
		1	49	13.65	13.64	13.43	0
		25	0	12.76	12.60	12.64	1
		25	12	12.55	12.65	12.59	1
		25	25	12.67	12.71	12.56	1
		50	0	12.55	12.65	12.69	1
10M	16QAM	1	0	12.59	12.54	12.62	1
		1	24	12.66	12.52	12.50	1
		1	49	12.61	12.58	12.51	1
		25	0	11.60	11.66	11.48	2
		25	12	11.59	11.63	11.57	2
		25	25	11.41	11.59	11.49	2
		50	0	11.48	11.56	11.50	2
10M	64QAM	1	0	11.52	11.67	11.51	2
		1	24	11.58	11.62	11.52	2
		1	49	11.53	11.64	11.60	2
		25	0	10.43	10.59	10.50	3
		25	12	10.46	10.66	10.67	3
		25	25	10.59	10.44	10.61	3
		50	0	10.63	10.64	10.64	3
10M	256QAM	1	0	8.66	8.74	8.62	5
		1	24	8.61	8.71	8.64	5
		1	49	8.66	8.62	8.72	5
		25	0	8.60	8.66	8.67	5
		25	12	8.62	8.64	8.64	5
		25	25	8.57	8.65	8.72	5
		50	0	8.67	8.61	8.67	5
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	13.55	13.68	13.61	0
		1	12	13.58	13.54	13.50	0
		1	24	13.58	13.58	13.35	0
		12	0	12.66	12.74	12.49	1
		12	6	12.63	12.69	12.49	1
		12	13	12.58	12.67	12.42	1
		25	0	12.54	12.74	12.57	1
5M	16QAM	1	0	12.49	12.66	12.68	1
		1	12	12.61	12.59	12.51	1
		1	24	12.54	12.53	12.48	1
		12	0	11.55	11.63	11.51	2
		12	6	11.48	11.53	11.50	2
		12	13	11.44	11.50	11.53	2
		25	0	11.47	11.65	11.48	2
5M	64QAM	1	0	11.55	11.54	11.49	2
		1	12	11.60	11.58	11.58	2
		1	24	11.60	11.53	11.52	2
		12	0	10.51	10.51	10.52	3
		12	6	10.49	10.66	10.59	3
		12	13	10.56	10.48	10.56	3
		25	0	10.61	10.61	10.63	3
5M	256QAM	1	0	8.67	8.74	8.67	5
		1	12	8.56	8.71	8.66	5
		1	24	8.67	8.60	8.65	5
		12	0	8.59	8.62	8.68	5
		12	6	8.58	8.71	8.65	5
		12	13	8.61	8.66	8.73	5
		25	0	8.67	8.62	8.64	5

LTE Conducted Power_ENDC_Tablet_Ant 0									
LTE Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	16.85	16.64	16.32	17.35	17.33	0
		1	50	16.84	16.63	16.31	17.34	17.32	0
		1	99	16.81	16.60	16.28	17.31	17.29	0
		50	0	15.84	15.63	15.31	16.34	16.32	1
		50	25	15.82	15.61	15.29	16.32	16.30	1
		50	50	15.79	15.58	15.26	16.29	16.27	1
		100	0	15.81	15.60	15.28	16.31	16.29	1
20M	16QAM	1	0	15.72	15.53	15.21	16.19	16.20	1
		1	50	15.70	15.53	15.18	16.19	16.19	1
		1	99	15.70	15.48	15.16	16.25	16.25	1
		50	0	14.74	14.50	14.20	15.26	15.23	2
		50	25	14.73	14.53	14.19	15.24	15.25	2
		50	50	14.76	14.58	14.25	15.20	15.20	2
		100	0	14.72	14.55	14.24	15.26	15.22	2
20M	64QAM	1	0	14.74	14.53	14.25	15.20	15.25	2
		1	50	14.79	14.48	14.20	15.19	15.25	2
		1	99	14.75	14.57	14.23	15.29	15.27	2
		50	0	13.69	13.53	13.26	14.26	14.25	3
		50	25	13.74	13.52	13.22	14.21	14.18	3
		50	50	13.79	13.53	13.25	14.28	14.25	3
		100	0	13.74	13.48	13.16	14.29	14.24	3
20M	256QAM	1	0	11.80	11.61	11.22	12.27	12.28	5
		1	50	11.85	11.63	11.26	12.26	12.23	5
		1	99	11.84	11.60	11.31	12.25	12.26	5
		50	0	11.77	11.64	11.30	12.29	12.33	5
		50	25	11.77	11.62	11.25	12.28	12.29	5
		50	50	11.77	11.54	11.30	12.31	12.24	5
		100	0	11.80	11.61	11.32	12.31	12.32	5
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	16.79	16.59	16.22	17.31	17.33	0
		1	37	16.82	16.63	16.21	17.27	17.26	0
		1	74	16.81	16.59	16.22	17.29	17.26	0
		36	0	15.79	15.61	15.28	16.25	16.26	1
		36	19	15.82	15.58	15.25	16.27	16.22	1
		36	39	15.71	15.54	15.17	16.20	16.23	1
		75	0	15.75	15.50	15.21	16.27	16.19	1
15M	16QAM	1	0	15.65	15.51	15.20	16.10	16.20	1
		1	37	15.70	15.44	15.12	16.10	16.17	1
		1	74	15.60	15.45	15.12	16.25	16.18	1
		36	0	14.68	14.42	14.11	15.22	15.20	2
		36	19	14.73	14.48	14.14	15.24	15.19	2
		36	39	14.76	14.49	14.20	15.12	15.16	2
		75	0	14.68	14.54	14.23	15.16	15.21	2
15M	64QAM	1	0	14.68	14.50	14.17	15.12	15.17	2
		1	37	14.70	14.48	14.11	15.11	15.18	2
		1	74	14.68	14.48	14.20	15.29	15.21	2
		36	0	13.68	13.47	13.16	14.26	14.17	3
		36	19	13.70	13.43	13.12	14.13	14.15	3
		36	39	13.78	13.50	13.16	14.26	14.18	3
		75	0	13.66	13.39	13.11	14.20	14.14	3
15M	256QAM	1	0	11.79	11.60	11.26	12.29	12.28	5
		1	37	11.78	11.59	11.28	12.26	12.29	5
		1	74	11.77	11.55	11.31	12.25	12.26	5
		36	0	11.75	11.61	11.28	12.33	12.28	5
		36	19	11.75	11.64	11.28	12.29	12.32	5
		36	39	11.81	11.64	11.31	12.29	12.25	5
		75	0	11.75	11.54	11.25	12.33	12.23	5

LTE Conducted Power_ENDC_Tablet_Ant 0									
LTE Band 41									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	16.66	16.48	16.22	17.28	17.33	0
		1	24	16.71	16.62	16.12	17.26	17.18	0
		1	49	16.81	16.56	16.21	17.21	17.18	0
		25	0	15.71	15.54	15.26	16.17	16.23	1
		25	12	15.81	15.58	15.20	16.21	16.17	1
		25	25	15.60	15.49	15.13	16.20	16.16	1
		50	0	15.72	15.46	15.14	16.25	16.14	1
10M	16QAM	1	0	15.58	15.40	15.18	16.08	16.20	1
		1	24	15.62	15.36	15.10	16.09	16.16	1
		1	49	15.50	15.36	15.12	16.15	16.14	1
		25	0	14.62	14.27	14.04	15.12	15.13	2
		25	12	14.60	14.34	14.10	15.22	15.19	2
		25	25	14.69	14.36	14.16	15.06	15.06	2
		50	0	14.61	14.41	14.20	15.10	15.21	2
10M	64QAM	1	0	14.63	14.46	14.08	15.12	15.10	2
		1	24	14.60	14.39	14.07	15.10	15.08	2
		1	49	14.63	14.42	14.17	15.21	15.21	2
		25	0	13.57	13.40	13.10	14.16	14.09	3
		25	12	13.59	13.33	13.11	14.10	14.14	3
		25	25	13.70	13.42	13.08	14.25	14.18	3
		50	0	13.56	13.31	13.11	14.11	14.14	3
10M	256QAM	1	0	11.79	11.53	11.18	12.24	12.19	5
		1	24	11.69	11.55	11.24	12.26	12.20	5
		1	49	11.70	11.52	11.23	12.23	12.18	5
		25	0	11.72	11.55	11.24	12.23	12.22	5
		25	12	11.74	11.59	11.28	12.21	12.22	5
		25	25	11.78	11.58	11.30	12.23	12.25	5
		50	0	11.70	11.52	11.24	12.25	12.19	5
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	16.72	16.45	16.18	17.28	17.23	0
		1	12	16.67	16.58	16.12	17.23	17.15	0
		1	24	16.71	16.53	16.19	17.12	17.10	0
		12	0	15.64	15.48	15.19	16.15	16.22	1
		12	6	15.72	15.50	15.17	16.15	16.08	1
		12	13	15.61	15.42	15.03	16.16	16.12	1
		25	0	15.64	15.33	15.12	16.17	16.08	1
5M	16QAM	1	0	15.65	15.38	15.11	16.05	16.13	1
		1	12	15.70	15.32	15.02	16.07	16.09	1
		1	24	15.46	15.40	15.11	16.15	16.10	1
		12	0	14.57	14.42	14.02	15.04	15.11	2
		12	6	14.65	14.44	14.05	15.14	15.11	2
		12	13	14.61	14.43	14.10	15.04	15.04	2
		25	0	14.60	14.54	14.13	15.07	15.18	2
5M	64QAM	1	0	14.53	14.49	14.06	15.12	15.04	2
		1	12	14.70	14.33	14.06	15.07	15.08	2
		1	24	14.58	14.33	14.11	15.11	15.18	2
		12	0	13.67	13.34	13.00	14.14	14.01	3
		12	6	13.70	13.36	13.07	14.10	14.09	3
		12	13	13.65	13.48	13.01	14.21	14.15	3
		25	0	13.63	13.29	13.10	14.02	14.08	3
5M	256QAM	1	0	11.79	11.60	11.25	12.21	12.26	5
		1	12	11.73	11.56	11.28	12.22	12.20	5
		1	24	11.74	11.52	11.29	12.18	12.20	5
		12	0	11.70	11.59	11.20	12.28	12.18	5
		12	6	11.65	11.58	11.25	12.19	12.25	5
		12	13	11.71	11.62	11.26	12.25	12.19	5
		25	0	11.75	11.51	11.21	12.27	12.20	5

LTE Conducted Power_ENDC_Tablet_Ant 0

LTE Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	12.78	12.21	12.15	12.45	0
		1	50	12.75	12.18	12.12	12.42	0
		1	99	12.71	12.14	12.08	12.38	0
		50	0	11.72	11.15	11.09	11.39	1
		50	25	11.70	11.13	11.07	11.37	1
		50	50	11.69	11.12	11.06	11.36	1
		100	0	11.68	11.11	11.05	11.35	1
20M	16QAM	1	0	11.66	11.06	10.98	11.26	1
		1	50	11.63	11.02	10.96	11.29	1
		1	99	11.56	11.08	11.03	11.28	1
		50	0	10.66	10.06	10.01	10.26	2
		50	25	10.65	10.08	10.00	10.32	2
		50	50	10.58	10.00	9.95	10.30	2
		100	0	10.61	10.03	9.95	10.28	2
20M	64QAM	1	0	10.66	10.08	10.00	10.28	2
		1	50	10.64	10.03	9.97	10.26	2
		1	99	10.61	10.09	9.96	10.32	2
		50	0	9.57	9.03	9.01	9.33	3
		50	25	9.63	9.06	8.95	9.27	3
		50	50	9.62	9.00	8.96	9.31	3
		100	0	9.56	8.99	9.01	9.26	3
20M	256QAM	1	0	7.14	7.27	7.08	7.15	5
		1	50	7.19	7.15	7.18	7.24	5
		1	99	7.19	7.22	7.21	7.19	5
		50	0	7.10	7.17	7.16	7.19	5
		50	25	7.12	7.20	7.20	7.10	5
		50	50	7.27	7.15	7.16	7.19	5
		100	0	7.23	7.21	7.22	7.18	5
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	12.71	12.17	12.15	12.35	0
		1	37	12.66	12.11	12.10	12.33	0
		1	74	12.67	12.08	11.99	12.31	0
		36	0	11.65	11.09	11.08	11.29	1
		36	19	11.62	11.03	11.04	11.27	1
		36	39	11.66	11.10	11.00	11.34	1
		75	0	11.63	11.06	11.02	11.27	1
15M	16QAM	1	0	11.64	11.01	10.93	11.24	1
		1	37	11.60	10.92	10.95	11.25	1
		1	74	11.52	10.98	11.01	11.28	1
		36	0	10.66	10.02	10.00	10.24	2
		36	19	10.61	10.06	9.94	10.29	2
		36	39	10.48	9.97	9.93	10.28	2
		75	0	10.51	9.94	9.89	10.19	2
15M	64QAM	1	0	10.59	10.00	9.93	10.25	2
		1	37	10.62	9.93	9.88	10.20	2
		1	74	10.52	10.09	9.91	10.27	2
		36	0	9.55	8.93	8.98	9.26	3
		36	19	9.59	9.02	8.92	9.17	3
		36	39	9.59	8.99	8.96	9.24	3
		75	0	9.47	8.90	8.93	9.19	3
15M	256QAM	1	0	7.10	7.24	7.16	7.21	5
		1	37	7.12	7.17	7.15	7.18	5
		1	74	7.14	7.22	7.18	7.16	5
		36	0	7.20	7.15	7.20	7.18	5
		36	19	7.18	7.24	7.16	7.09	5
		36	39	7.27	7.11	7.21	7.10	5
		75	0	7.17	7.15	7.24	7.25	5

LTE Conducted Power_ENDC_Tablet_Ant 0								
LTE Band 48								
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	12.66	12.06	12.04	12.18	0
		1	24	12.66	11.99	11.95	12.28	0
		1	49	12.61	11.93	11.89	12.21	0
		25	0	11.54	11.00	11.07	11.25	1
		25	12	11.58	10.91	10.84	11.17	1
		25	25	11.64	10.99	10.83	11.19	1
		50	0	11.58	10.94	10.90	11.18	1
10M	16QAM	1	0	11.62	10.95	10.83	11.15	1
		1	24	11.58	10.81	10.84	11.23	1
		1	49	11.50	10.98	10.89	11.21	1
		25	0	10.51	9.93	9.90	10.13	2
		25	12	10.50	9.98	9.87	10.10	2
		25	25	10.39	9.87	9.81	10.08	2
		50	0	10.42	9.88	9.87	10.11	2
10M	64QAM	1	0	10.53	9.98	9.92	10.18	2
		1	24	10.56	9.85	9.86	10.07	2
		1	49	10.47	10.08	9.77	10.17	2
		25	0	9.50	8.90	8.92	9.15	3
		25	12	9.47	8.98	8.80	9.10	3
		25	25	9.51	8.97	8.96	9.16	3
		50	0	9.44	8.90	8.91	9.16	3
10M	256QAM	1	0	7.18	7.22	7.14	7.13	5
		1	24	7.16	7.17	7.20	7.21	5
		1	49	7.20	7.22	7.19	7.14	5
		25	0	7.13	7.15	7.24	7.14	5
		25	12	7.17	7.17	7.11	7.15	5
		25	25	7.24	7.14	7.26	7.17	5
		50	0	7.26	7.17	7.25	7.25	5
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	12.56	12.17	12.08	12.08	0
		1	12	12.66	12.00	12.00	12.25	0
		1	24	12.67	11.99	11.86	12.18	0
		12	0	11.50	11.08	11.01	11.23	1
		12	6	11.59	10.90	11.02	11.10	1
		12	13	11.66	11.00	10.87	11.18	1
		25	0	11.55	10.91	10.87	11.14	1
5M	16QAM	1	0	11.60	10.88	10.82	11.13	1
		1	12	11.55	10.84	10.82	11.19	1
		1	24	11.52	10.84	10.97	11.11	1
		12	0	10.52	9.91	9.99	10.12	2
		12	6	10.47	10.05	9.86	10.00	2
		12	13	10.44	9.90	9.89	10.04	2
		25	0	10.50	9.82	9.79	10.05	2
5M	64QAM	1	0	10.52	9.98	9.86	10.17	2
		1	12	10.53	9.81	9.86	10.01	2
		1	24	10.39	10.07	9.78	10.11	2
		12	0	9.53	8.84	8.98	9.12	3
		12	6	9.47	9.00	8.77	9.06	3
		12	13	9.50	8.95	8.87	9.07	3
		25	0	9.36	8.76	8.90	9.12	3
5M	256QAM	1	0	7.14	7.22	7.16	7.17	5
		1	12	7.13	7.18	7.22	7.22	5
		1	24	7.18	7.18	7.23	7.13	5
		12	0	7.17	7.14	7.25	7.11	5
		12	6	7.14	7.25	7.16	7.12	5
		12	13	7.28	7.16	7.23	7.15	5
		25	0	7.25	7.17	7.27	7.21	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	14.77	14.71	14.67	0
		1	50	14.75	14.69	14.65	0
		1	99	14.72	14.66	14.62	0
		50	0	13.61	13.55	13.51	1
		50	25	13.58	13.52	13.48	1
		50	50	13.57	13.51	13.47	1
		100	0	13.59	13.53	13.49	1
20M	16QAM	1	0	13.49	13.49	13.38	1
		1	50	13.57	13.46	13.40	1
		1	99	13.53	13.50	13.42	1
		50	0	12.47	12.50	12.38	2
		50	25	12.50	12.49	12.45	2
		50	50	12.55	12.45	12.46	2
		100	0	12.52	12.51	12.41	2
20M	64QAM	1	0	12.49	12.41	12.43	2
		1	50	12.53	12.49	12.38	2
		1	99	12.57	12.44	12.44	2
		50	0	11.47	11.40	11.39	3
		50	25	11.52	11.47	11.42	3
		50	50	11.48	11.47	11.42	3
		100	0	11.51	11.47	11.39	3
20M	256QAM	1	0	9.64	9.66	9.67	5
		1	50	9.69	9.63	9.61	5
		1	99	9.66	9.66	9.67	5
		50	0	9.69	9.63	9.66	5
		50	25	9.67	9.61	9.67	5
		50	50	9.68	9.59	9.69	5
		100	0	9.61	9.66	9.65	5
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	14.57	14.59	14.58	0
		1	37	14.66	14.60	14.45	0
		1	74	14.61	14.45	14.41	0
		36	0	13.42	13.50	13.43	1
		36	19	13.37	13.41	13.33	1
		36	39	13.52	13.46	13.38	1
		75	0	13.46	13.47	13.31	1
15M	16QAM	1	0	13.40	13.40	13.28	1
		1	37	13.56	13.29	13.35	1
		1	74	13.32	13.44	13.24	1
		36	0	12.27	12.37	12.29	2
		36	19	12.47	12.31	12.28	2
		36	39	12.53	12.36	12.32	2
		75	0	12.33	12.37	12.32	2
15M	64QAM	1	0	12.37	12.30	12.27	2
		1	37	12.39	12.31	12.27	2
		1	74	12.44	12.31	12.30	2
		36	0	11.44	11.27	11.20	3
		36	19	11.45	11.32	11.26	3
		36	39	11.44	11.36	11.38	3
		75	0	11.41	11.32	11.24	3
15M	256QAM	1	0	9.59	9.57	9.64	5
		1	37	9.68	9.60	9.58	5
		1	74	9.57	9.66	9.66	5
		36	0	9.64	9.54	9.61	5
		36	19	9.60	9.59	9.57	5
		36	39	9.64	9.56	9.69	5
		75	0	9.52	9.63	9.57	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	14.63	14.57	14.56	0
		1	24	14.64	14.59	14.44	0
		1	49	14.57	14.51	14.37	0
		25	0	13.50	13.48	13.34	1
		25	12	13.38	13.43	13.22	1
		25	25	13.52	13.46	13.32	1
		50	0	13.44	13.40	13.20	1
10M	16QAM	1	0	13.27	13.42	13.16	1
		1	24	13.47	13.43	13.25	1
		1	49	13.43	13.43	13.26	1
		25	0	12.32	12.40	12.27	2
		25	12	12.42	12.34	12.28	2
		25	25	12.47	12.33	12.39	2
		50	0	12.30	12.40	12.26	2
10M	64QAM	1	0	12.37	12.29	12.18	2
		1	24	12.41	12.34	12.27	2
		1	49	12.49	12.40	12.43	2
		25	0	11.36	11.30	11.32	3
		25	12	11.41	11.30	11.30	3
		25	25	11.40	11.31	11.25	3
		50	0	11.29	11.41	11.26	3
10M	256QAM	1	0	9.58	9.61	9.57	5
		1	24	9.61	9.62	9.53	5
		1	49	9.64	9.64	9.67	5
		25	0	9.67	9.57	9.65	5
		25	12	9.58	9.54	9.63	5
		25	25	9.64	9.49	9.65	5
		50	0	9.56	9.61	9.56	5
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	14.66	14.64	14.54	0
		1	12	14.64	14.62	14.51	0
		1	24	14.59	14.46	14.52	0
		12	0	13.48	13.37	13.32	1
		12	6	13.50	13.47	13.30	1
		12	13	13.51	13.46	13.31	1
		25	0	13.53	13.41	13.36	1
5M	16QAM	1	0	13.27	13.34	13.21	1
		1	12	13.57	13.32	13.21	1
		1	24	13.35	13.40	13.24	1
		12	0	12.25	12.26	12.30	2
		12	6	12.42	12.46	12.27	2
		12	13	12.53	12.34	12.40	2
		25	0	12.40	12.39	12.25	2
5M	64QAM	1	0	12.28	12.31	12.28	2
		1	12	12.52	12.41	12.25	2
		1	24	12.49	12.33	12.38	2
		12	0	11.31	11.20	11.24	3
		12	6	11.45	11.38	11.20	3
		12	13	11.37	11.28	11.30	3
		25	0	11.40	11.36	11.15	3
5M	256QAM	1	0	9.66	9.52	9.52	5
		1	12	9.57	9.55	9.49	5
		1	24	9.56	9.62	9.52	5
		12	0	9.54	9.63	9.60	5
		12	6	9.65	9.65	9.50	5
		12	13	9.52	9.60	9.56	5
		25	0	9.54	9.55	9.62	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	14.71	14.64	14.48	0
		1	7	14.64	14.58	14.48	0
		1	14	14.49	14.52	14.45	0
		8	0	13.52	13.46	13.25	1
		8	3	13.53	13.40	13.19	1
		8	7	13.43	13.31	13.37	1
		15	0	13.43	13.49	13.32	1
3M	16QAM	1	0	13.42	13.45	13.29	1
		1	7	13.46	13.43	13.27	1
		1	14	13.47	13.48	13.38	1
		8	0	12.34	12.30	12.29	2
		8	3	12.33	12.33	12.29	2
		8	7	12.42	12.35	12.32	2
		15	0	12.43	12.44	12.17	2
3M	64QAM	1	0	12.37	12.36	12.37	2
		1	7	12.40	12.41	12.31	2
		1	14	12.49	12.28	12.38	2
		8	0	11.35	11.27	11.33	3
		8	3	11.34	11.33	11.21	3
		8	7	11.44	11.36	11.24	3
		15	0	11.30	11.29	11.26	3
3M	256QAM	1	0	9.62	9.56	9.50	5
		1	7	9.55	9.52	9.59	5
		1	14	9.55	9.61	9.54	5
		8	0	9.57	9.67	9.60	5
		8	3	9.58	9.64	9.51	5
		8	7	9.60	9.63	9.55	5
		15	0	9.56	9.52	9.54	5
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	14.56	14.65	14.51	0
		1	2	14.70	14.55	14.48	0
		1	5	14.64	14.53	14.57	0
		3	0	14.55	14.54	14.54	0
		3	1	14.49	14.49	14.56	0
		3	3	14.62	14.43	14.56	0
		6	0	13.64	13.49	13.52	1
1.4M	16QAM	1	0	13.53	13.43	13.55	1
		1	2	13.48	13.55	13.42	1
		1	5	13.62	13.48	13.54	1
		3	0	13.58	13.48	13.47	1
		3	1	13.61	13.45	13.43	1
		3	3	13.51	13.49	13.47	1
		6	0	12.55	12.45	12.44	2
1.4M	64QAM	1	0	12.58	12.56	12.47	2
		1	2	12.45	12.45	12.51	2
		1	5	12.53	12.44	12.38	2
		3	0	12.59	12.45	12.48	2
		3	1	12.61	12.45	12.45	2
		3	3	12.57	12.48	12.49	2
		6	0	11.43	11.48	11.40	3
1.4M	256QAM	1	0	9.62	9.52	9.56	5
		1	2	9.59	9.60	9.49	5
		1	5	9.60	9.62	9.53	5
		3	0	9.58	9.58	9.59	5
		3	1	9.58	9.59	9.53	5
		3	3	9.59	9.65	9.59	5
		6	0	9.59	9.50	9.60	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 71							
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	16.95	17.06	17.23	0
		1	50	16.91	17.02	17.19	0
		1	99	16.87	16.98	17.15	0
		50	0	15.98	16.09	16.26	1
		50	25	15.87	15.98	16.15	1
		50	50	15.85	15.96	16.13	1
		100	0	15.94	16.05	16.22	1
20M	16QAM	1	0	15.93	15.88	15.90	1
		1	50	15.90	15.89	15.85	1
		1	99	15.90	15.85	15.87	1
		50	0	14.87	14.86	14.90	2
		50	25	14.92	14.90	14.92	2
		50	50	14.91	14.90	14.83	2
		100	0	14.93	14.92	14.93	2
20M	64QAM	1	0	14.91	14.84	14.90	2
		1	50	14.92	14.85	14.87	2
		1	99	14.93	14.91	14.83	2
		50	0	13.87	13.83	13.84	3
		50	25	13.88	13.92	13.92	3
		50	50	13.85	13.89	13.86	3
		100	0	13.84	13.84	13.90	3
20M	256QAM	1	0	12.01	12.05	12.09	5
		1	50	12.01	12.05	12.07	5
		1	99	12.02	12.02	12.01	5
		50	0	12.04	12.09	12.00	5
		50	25	12.00	12.03	12.08	5
		50	50	12.02	11.99	12.00	5
		100	0	12.06	12.02	12.08	5
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	QPSK	1	0	16.85	16.90	17.20	0
		1	37	16.86	16.83	17.04	0
		1	74	16.79	16.90	17.02	0
		36	0	15.86	15.92	16.19	1
		36	19	15.74	15.89	16.09	1
		36	39	15.75	15.88	15.97	1
		75	0	15.76	15.85	16.14	1
15M	16QAM	1	0	15.77	15.74	15.80	1
		1	37	15.86	15.81	15.64	1
		1	74	15.85	15.73	15.70	1
		36	0	14.85	14.73	14.79	2
		36	19	14.85	14.68	14.68	2
		36	39	14.81	14.86	14.70	2
		75	0	14.81	14.80	14.79	2
15M	64QAM	1	0	14.80	14.76	14.72	2
		1	37	14.88	14.62	14.69	2
		1	74	14.75	14.79	14.70	2
		36	0	13.77	13.64	13.79	3
		36	19	13.71	13.70	13.78	3
		36	39	13.74	13.74	13.77	3
		75	0	13.72	13.69	13.71	3
15M	256QAM	1	0	11.98	12.04	12.05	5
		1	37	11.96	11.96	12.05	5
		1	74	11.98	11.93	11.95	5
		36	0	12.02	12.03	11.98	5
		36	19	11.99	12.02	12.07	5
		36	39	11.96	11.97	11.95	5
		75	0	12.00	11.99	12.03	5

LTE Conducted Power_ENDC_Tablet_Ant 0							
LTE Band 71							
BW	MCS Index	Channel		133172	133297	133422	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	QPSK	1	0	16.80	17.00	17.17	0
		1	24	16.84	16.88	17.02	0
		1	49	16.71	16.96	16.99	0
		25	0	15.81	15.95	16.09	1
		25	12	15.72	15.74	15.97	1
		25	25	15.65	15.86	15.84	1
		50	0	15.74	15.86	16.10	1
10M	16QAM	1	0	15.82	15.79	15.88	1
		1	24	15.85	15.77	15.61	1
		1	49	15.88	15.74	15.80	1
		25	0	14.74	14.64	14.70	2
		25	12	14.76	14.81	14.73	2
		25	25	14.87	14.73	14.68	2
		50	0	14.78	14.78	14.87	2
10M	64QAM	1	0	14.88	14.75	14.79	2
		1	24	14.80	14.64	14.74	2
		1	49	14.75	14.76	14.74	2
		25	0	13.74	13.73	13.75	3
		25	12	13.80	13.71	13.72	3
		25	25	13.76	13.71	13.79	3
		50	0	13.64	13.75	13.70	3
10M	256QAM	1	0	11.99	12.01	12.05	5
		1	24	11.91	11.95	11.98	5
		1	49	11.99	11.92	11.93	5
		25	0	12.02	12.04	11.94	5
		25	12	11.94	11.99	12.01	5
		25	25	11.98	11.93	11.93	5
		50	0	12.06	12.02	12.04	5
BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	16.85	17.00	17.09	0
		1	12	16.76	16.85	17.14	0
		1	24	16.74	16.88	16.93	0
		12	0	15.91	16.01	16.05	1
		12	6	15.68	15.74	16.00	1
		12	13	15.69	15.78	16.01	1
		25	0	15.77	15.83	16.14	1
5M	16QAM	1	0	15.83	15.75	15.84	1
		1	12	15.76	15.84	15.69	1
		1	24	15.89	15.78	15.73	1
		12	0	14.79	14.69	14.73	2
		12	6	14.71	14.80	14.83	2
		12	13	14.81	14.77	14.78	2
		25	0	14.80	14.82	14.79	2
5M	64QAM	1	0	14.74	14.68	14.74	2
		1	12	14.82	14.74	14.71	2
		1	24	14.82	14.87	14.75	2
		12	0	13.73	13.69	13.73	3
		12	6	13.83	13.81	13.78	3
		12	13	13.78	13.70	13.66	3
		25	0	13.69	13.68	13.84	3
5M	256QAM	1	0	12.01	12.03	12.02	5
		1	12	11.93	11.99	12.07	5
		1	24	12.02	11.92	11.97	5
		12	0	11.98	12.09	11.99	5
		12	6	11.91	11.95	12.05	5
		12	13	12.00	11.99	11.99	5
		25	0	12.05	11.97	12.00	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	13.48	13.78	13.81	0
		1	50	13.43	13.73	13.76	0
		1	99	13.41	13.71	13.74	0
		50	0	11.85	12.15	12.18	1
		50	25	11.82	12.12	12.15	1
		50	50	11.80	12.10	12.13	1
		100	0	11.82	12.12	12.15	1
20M	16QAM	1	0	11.78	12.02	12.06	1
		1	50	11.76	12.08	12.13	1
		1	99	11.79	12.05	12.07	1
		50	0	10.79	11.10	11.12	2
		50	25	10.80	11.02	11.12	2
		50	50	10.78	11.09	11.07	2
		100	0	10.75	11.07	11.04	2
20M	64QAM	1	0	10.77	11.03	11.13	2
		1	50	10.78	11.07	11.11	2
		1	99	10.75	11.01	11.05	2
		50	0	9.71	10.10	10.06	3
		50	25	9.77	10.10	10.04	3
		50	50	9.79	10.00	10.08	3
		100	0	9.80	10.03	10.06	3
20M	256QAM	1	0	8.44	8.70	8.80	5
		1	50	8.43	8.77	8.77	5
		1	99	8.44	8.74	8.80	5
		50	0	8.41	8.69	8.76	5
		50	25	8.46	8.78	8.81	5
		50	50	8.40	8.73	8.79	5
		100	0	8.44	8.71	8.71	5
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	13.39	13.68	13.78	0
		1	37	13.38	13.65	13.71	0
		1	74	13.34	13.65	13.73	0
		36	0	11.79	12.12	12.09	1
		36	19	11.82	12.09	12.07	1
		36	39	11.74	12.04	12.12	1
		75	0	11.78	12.06	12.05	1
15M	16QAM	1	0	11.78	11.92	11.97	1
		1	37	11.70	12.05	12.03	1
		1	74	11.69	12.00	12.01	1
		36	0	10.77	11.00	11.12	2
		36	19	10.80	10.98	11.11	2
		36	39	10.69	11.03	11.07	2
		75	0	10.65	11.05	10.99	2
15M	64QAM	1	0	10.67	11.03	11.06	2
		1	37	10.69	11.00	11.06	2
		1	74	10.69	11.01	11.05	2
		36	0	9.71	10.01	10.00	3
		36	19	9.77	10.03	9.94	3
		36	39	9.73	9.90	10.02	3
		75	0	9.76	9.94	9.96	3
15M	256QAM	1	0	8.43	8.68	8.74	5
		1	37	8.38	8.67	8.69	5
		1	74	8.37	8.74	8.79	5
		36	0	8.36	8.68	8.70	5
		36	19	8.44	8.78	8.80	5
		36	39	8.36	8.65	8.77	5
		36	0	8.42	8.61	8.69	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	13.26	13.59	13.65	0
		1	24	13.35	13.60	13.63	0
		1	49	13.32	13.55	13.65	0
		25	0	11.70	12.00	11.96	1
		25	12	11.67	12.05	11.93	1
		25	25	11.70	11.94	12.08	1
		50	0	11.75	12.03	11.93	1
10M	16QAM	1	0	11.71	11.83	11.89	1
		1	24	11.66	11.94	12.01	1
		1	49	11.55	11.98	11.90	1
		25	0	10.64	10.91	11.11	2
		25	12	10.67	10.94	11.01	2
		25	25	10.65	10.99	10.93	2
		50	0	10.59	11.04	10.95	2
10M	64QAM	1	0	10.58	11.03	10.94	2
		1	24	10.63	10.87	11.04	2
		1	49	10.54	10.91	11.02	2
		25	0	9.63	10.00	10.00	3
		25	12	9.75	9.99	9.92	3
		25	25	9.67	9.75	9.97	3
		50	0	9.67	9.81	9.84	3
10M	256QAM	1	0	8.40	8.68	8.79	5
		1	24	8.38	8.67	8.68	5
		1	49	8.34	8.69	8.76	5
		25	0	8.40	8.62	8.66	5
		25	12	8.39	8.69	8.72	5
		25	25	8.34	8.71	8.71	5
		50	0	8.44	8.71	8.69	5
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	13.37	13.67	13.58	0
		1	12	13.23	13.51	13.57	0
		1	24	13.28	13.64	13.55	0
		12	0	11.79	12.08	11.94	1
		12	6	11.73	12.07	11.90	1
		12	13	11.64	11.96	12.01	1
		25	0	11.72	11.97	11.82	1
5M	16QAM	1	0	11.73	11.85	11.89	1
		1	12	11.65	11.98	11.88	1
		1	24	11.64	11.95	11.86	1
		12	0	10.66	10.93	11.04	2
		12	6	10.65	10.95	11.01	2
		12	13	10.54	10.92	10.96	2
		25	0	10.51	11.00	10.85	2
5M	64QAM	1	0	10.57	11.03	10.91	2
		1	12	10.55	10.96	11.05	2
		1	24	10.69	10.91	11.02	2
		12	0	9.65	9.88	9.94	3
		12	6	9.76	9.96	9.93	3
		12	13	9.71	9.77	10.01	3
		25	0	9.62	9.82	9.91	3
5M	256QAM	1	0	8.41	8.60	8.74	5
		1	12	8.35	8.75	8.68	5
		1	24	8.38	8.64	8.80	5
		12	0	8.39	8.64	8.70	5
		12	6	8.46	8.76	8.81	5
		12	13	8.30	8.73	8.79	5
		25	0	8.38	8.65	8.61	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	13.27	13.57	13.69	0
		1	7	13.36	13.50	13.58	0
		1	14	13.23	13.64	13.58	0
		8	0	11.73	12.12	11.97	1
		8	3	11.75	12.02	12.05	1
		8	7	11.63	11.96	12.11	1
		15	0	11.63	12.02	12.05	1
3M	16QAM	1	0	11.70	11.92	11.87	1
		1	7	11.58	11.98	12.03	1
		1	14	11.60	11.90	12.01	1
		8	0	10.64	10.97	11.12	2
		8	3	10.78	10.92	11.02	2
		8	7	10.55	10.92	10.96	2
		15	0	10.57	11.04	10.91	2
3M	64QAM	1	0	10.52	10.97	11.06	2
		1	7	10.58	10.89	10.91	2
		1	14	10.55	10.90	11.00	2
		8	0	9.57	9.89	10.00	3
		8	3	9.64	9.95	9.80	3
		8	7	9.70	9.79	9.91	3
		15	0	9.66	9.93	9.89	3
3M	256QAM	1	0	8.35	8.64	8.71	5
		1	7	8.34	8.73	8.77	5
		1	14	8.39	8.67	8.74	5
		8	0	8.37	8.64	8.73	5
		8	3	8.40	8.68	8.78	5
		8	7	8.32	8.66	8.71	5
		15	0	8.34	8.63	8.66	5
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	13.33	13.75	13.78	0
		1	2	13.39	13.63	13.72	0
		1	5	13.37	13.61	13.55	0
		3	0	13.36	13.71	13.57	0
		3	1	13.41	13.56	13.63	0
		3	3	13.25	13.75	13.64	0
		6	0	12.26	12.54	12.68	1
1.4M	16QAM	1	0	12.33	12.66	12.73	1
		1	2	12.29	12.67	12.62	1
		1	5	12.40	12.59	12.70	1
		3	0	12.35	12.63	12.63	1
		3	1	12.37	12.70	12.56	1
		3	3	12.28	12.66	12.65	1
		6	0	11.42	11.61	11.65	2
1.4M	64QAM	1	0	11.25	11.67	11.58	2
		1	2	11.34	11.64	11.77	2
		1	5	11.34	11.66	11.65	2
		3	0	11.38	11.74	11.72	2
		3	1	11.41	11.63	11.72	2
		3	3	11.35	11.62	11.74	2
		6	0	10.30	10.63	10.74	3
1.4M	256QAM	1	0	8.39	8.67	8.77	5
		1	2	8.37	8.74	8.69	5
		1	5	8.43	8.71	8.80	5
		3	0	8.40	8.66	8.70	5
		3	1	8.45	8.70	8.80	5
		3	3	8.32	8.72	8.77	5
		6	0	8.37	8.61	8.61	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	17.61	17.56	17.54	0
		1	50	17.58	17.53	17.51	0
		1	99	17.54	17.49	17.47	0
		50	0	16.35	16.30	16.28	1
		50	25	16.32	16.27	16.25	1
		50	50	16.27	16.22	16.20	1
		100	0	16.29	16.24	16.22	1
20M	16QAM	1	0	16.19	16.22	16.12	1
		1	50	16.17	16.14	16.19	1
		1	99	16.19	16.13	16.16	1
		50	0	15.20	15.19	15.13	2
		50	25	15.25	15.20	15.16	2
		50	50	15.26	15.14	15.11	2
		100	0	15.22	15.13	15.17	2
20M	64QAM	1	0	15.25	15.18	15.12	2
		1	50	15.23	15.20	15.19	2
		1	99	15.24	15.17	15.17	2
		50	0	14.26	14.22	14.15	3
		50	25	14.26	14.12	14.15	3
		50	50	14.27	14.15	14.15	3
		100	0	14.26	14.14	14.13	3
20M	256QAM	1	0	12.61	12.51	12.54	5
		1	50	12.56	12.53	12.48	5
		1	99	12.56	12.50	12.45	5
		50	0	12.57	12.55	12.45	5
		50	25	12.59	12.48	12.45	5
		50	50	12.56	12.54	12.50	5
		100	0	12.54	12.56	12.47	5
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	17.53	17.54	17.48	0
		1	37	17.50	17.48	17.50	0
		1	74	17.48	17.44	17.38	0
		36	0	16.25	16.23	16.20	1
		36	19	16.28	16.24	16.24	1
		36	39	16.27	16.21	16.20	1
		75	0	16.21	16.24	16.14	1
15M	16QAM	1	0	16.18	16.19	16.04	1
		1	37	16.12	16.10	16.18	1
		1	74	16.14	16.05	16.07	1
		36	0	15.17	15.10	15.06	2
		36	19	15.23	15.10	15.12	2
		36	39	15.18	15.06	15.07	2
		75	0	15.13	15.03	15.17	2
15M	64QAM	1	0	15.16	15.08	15.12	2
		1	37	15.13	15.20	15.19	2
		1	74	15.22	15.09	15.13	2
		36	0	14.16	14.18	14.05	3
		36	19	14.22	14.09	14.07	3
		36	39	14.19	14.09	14.11	3
		75	0	14.21	14.09	14.09	3
15M	256QAM	1	0	12.61	12.45	12.54	5
		1	37	12.54	12.43	12.38	5
		1	74	12.49	12.45	12.43	5
		36	0	12.53	12.46	12.42	5
		36	19	12.52	12.39	12.36	5
		36	39	12.51	12.54	12.49	5
		75	0	12.53	12.56	12.37	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	17.52	17.50	17.47	0
		1	24	17.49	17.49	17.44	0
		1	49	17.46	17.48	17.39	0
		25	0	16.27	16.22	16.23	1
		25	12	16.22	16.23	16.23	1
		25	25	16.18	16.19	16.14	1
		50	0	16.25	16.21	16.13	1
10M	16QAM	1	0	16.17	16.15	16.12	1
		1	24	16.15	16.08	16.19	1
		1	49	16.10	16.10	16.14	1
		25	0	15.13	15.10	15.08	2
		25	12	15.22	15.12	15.16	2
		25	25	15.24	15.07	15.10	2
		50	0	15.15	15.07	15.16	2
10M	64QAM	1	0	15.24	15.17	15.09	2
		1	24	15.13	15.18	15.09	2
		1	49	15.21	15.07	15.15	2
		25	0	14.22	14.17	14.13	3
		25	12	14.20	14.05	14.11	3
		25	25	14.26	14.14	14.07	3
		50	0	14.19	14.08	14.04	3
10M	256QAM	1	0	12.59	12.43	12.44	5
		1	24	12.49	12.44	12.46	5
		1	49	12.51	12.46	12.43	5
		25	0	12.50	12.49	12.40	5
		25	12	12.55	12.40	12.39	5
		25	25	12.47	12.49	12.49	5
		50	0	12.53	12.55	12.45	5
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	17.50	17.41	17.37	0
		1	12	17.46	17.49	17.40	0
		1	24	17.39	17.45	17.26	0
		12	0	16.12	16.17	16.22	1
		12	6	16.12	16.15	16.16	1
		12	13	16.14	16.04	16.04	1
		25	0	16.23	16.12	16.07	1
5M	16QAM	1	0	16.11	16.09	16.06	1
		1	12	16.12	15.99	16.09	1
		1	24	15.95	15.97	16.14	1
		12	0	15.04	15.04	14.96	2
		12	6	15.09	14.98	15.08	2
		12	13	15.10	15.03	14.95	2
		25	0	15.10	14.99	15.06	2
5M	64QAM	1	0	15.15	15.14	15.03	2
		1	12	14.98	15.14	15.09	2
		1	24	15.07	15.01	15.05	2
		12	0	14.10	14.11	14.07	3
		12	6	14.13	13.93	14.01	3
		12	13	14.22	14.13	14.01	3
		25	0	14.11	13.98	13.89	3
5M	256QAM	1	0	12.58	12.48	12.53	5
		1	12	12.52	12.45	12.40	5
		1	24	12.52	12.46	12.44	5
		12	0	12.55	12.51	12.44	5
		12	6	12.56	12.47	12.40	5
		12	13	12.48	12.51	12.40	5
		25	0	12.52	12.47	12.37	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	17.46	17.47	17.32	0
		1	7	17.44	17.36	17.40	0
		1	14	17.31	17.44	17.18	0
		8	0	16.22	16.12	16.22	1
		8	3	16.17	16.17	16.16	1
		8	7	16.06	16.05	15.89	1
		15	0	16.22	16.16	15.99	1
3M	16QAM	1	0	16.11	16.06	16.01	1
		1	7	16.04	16.08	16.14	1
		1	14	16.05	16.00	16.00	1
		8	0	15.01	14.97	14.97	2
		8	3	15.10	15.05	15.07	2
		8	7	15.21	15.02	15.06	2
		15	0	15.06	14.92	15.01	2
3M	64QAM	1	0	15.24	15.11	15.04	2
		1	7	15.04	15.11	15.08	2
		1	14	15.13	14.98	15.07	2
		8	0	14.21	14.09	14.12	3
		8	3	14.08	13.91	14.01	3
		8	7	14.24	14.01	14.04	3
		15	0	14.18	13.97	13.98	3
3M	256QAM	1	0	12.53	12.47	12.53	5
		1	7	12.55	12.53	12.48	5
		1	14	12.54	12.49	12.35	5
		8	0	12.57	12.54	12.45	5
		8	3	12.58	12.42	12.45	5
		8	7	12.55	12.53	12.50	5
		15	0	12.45	12.52	12.39	5
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	17.45	17.46	17.46	0
		1	2	17.48	17.37	17.35	0
		1	5	17.56	17.35	17.50	0
		3	0	17.50	17.50	17.31	0
		3	1	17.45	17.37	17.45	0
		3	3	17.47	17.37	17.38	0
		6	0	16.44	16.55	16.36	1
1.4M	16QAM	1	0	16.46	16.49	16.40	1
		1	2	16.59	16.52	16.48	1
		1	5	16.60	16.41	16.53	1
		3	0	16.45	16.45	16.52	1
		3	1	16.50	16.46	16.51	1
		3	3	16.48	16.41	16.44	1
		6	0	15.44	15.38	15.42	2
1.4M	64QAM	1	0	15.50	15.33	15.32	2
		1	2	15.42	15.44	15.44	2
		1	5	15.47	15.42	15.40	2
		3	0	15.50	15.41	15.48	2
		3	1	15.41	15.41	15.53	2
		3	3	15.52	15.41	15.40	2
		6	0	14.51	14.44	14.49	3
1.4M	256QAM	1	0	12.57	12.48	12.52	5
		1	2	12.53	12.47	12.40	5
		1	5	12.54	12.48	12.37	5
		3	0	12.48	12.47	12.44	5
		3	1	12.58	12.40	12.37	5
		3	3	12.52	12.45	12.40	5
		6	0	12.51	12.50	12.40	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	14.27	14.23	14.31	0
		1	50	14.24	14.20	14.28	0
		1	99	14.21	14.17	14.25	0
		50	0	13.31	13.27	13.35	1
		50	25	13.29	13.25	13.33	1
		50	50	13.24	13.20	13.28	1
		100	0	13.18	13.14	13.22	1
20M	16QAM	1	0	13.12	13.08	13.12	1
		1	50	13.07	13.07	13.09	1
		1	99	13.05	13.09	13.07	1
		50	0	12.13	12.04	12.09	2
		50	25	12.08	12.09	12.11	2
		50	50	12.11	12.09	12.10	2
		100	0	12.13	12.06	12.09	2
20M	64QAM	1	0	12.06	12.04	12.11	2
		1	50	12.10	12.08	12.07	2
		1	99	12.08	12.07	12.07	2
		50	0	11.04	11.08	11.09	3
		50	25	11.11	11.08	11.06	3
		50	50	11.06	11.05	11.11	3
		100	0	11.04	11.06	11.11	3
20M	256QAM	1	0	9.17	9.14	9.16	5
		1	50	9.16	9.19	9.20	5
		1	99	9.12	9.12	9.18	5
		50	0	9.14	9.15	9.18	5
		50	25	9.14	9.19	9.19	5
		50	50	9.18	9.22	9.14	5
		100	0	9.13	9.14	9.21	5
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	14.21	14.00	14.20	0
		1	37	14.15	14.05	14.09	0
		1	74	14.21	14.03	14.17	0
		36	0	13.09	13.16	13.13	1
		36	19	13.13	13.08	13.20	1
		36	39	13.15	13.08	13.11	1
		75	0	13.01	13.03	13.13	1
15M	16QAM	1	0	13.01	13.05	13.01	1
		1	37	12.97	12.92	13.00	1
		1	74	12.96	13.04	12.93	1
		36	0	12.01	12.03	11.99	2
		36	19	12.05	11.95	12.00	2
		36	39	11.98	12.05	11.93	2
		75	0	12.06	11.88	11.91	2
15M	64QAM	1	0	11.97	11.88	11.93	2
		1	37	12.03	11.90	11.85	2
		1	74	12.07	11.98	11.97	2
		36	0	10.89	11.08	11.08	3
		36	19	10.98	10.94	10.89	3
		36	39	10.92	10.92	11.06	3
		75	0	10.89	10.90	10.90	3
15M	256QAM	1	0	9.09	9.14	9.07	5
		1	37	9.07	9.13	9.16	5
		1	74	9.02	9.05	9.12	5
		36	0	9.08	9.15	9.14	5
		36	19	9.14	9.18	9.18	5
		36	39	9.14	9.17	9.10	5
		75	0	9.03	9.13	9.18	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	14.19	14.19	14.27	0
		1	24	14.18	14.12	14.23	0
		1	49	14.21	14.13	14.15	0
		25	0	13.31	13.24	13.32	1
		25	12	13.23	13.25	13.30	1
		25	25	13.24	13.15	13.26	1
		50	0	13.10	13.05	13.14	1
10M	16QAM	1	0	13.09	13.08	13.09	1
		1	24	13.03	13.01	13.02	1
		1	49	13.05	13.01	12.99	1
		25	0	12.11	12.04	12.03	2
		25	12	12.01	12.01	12.06	2
		25	25	12.06	12.05	12.07	2
		50	0	12.13	12.00	12.05	2
10M	64QAM	1	0	12.04	11.99	12.05	2
		1	24	12.03	12.08	12.04	2
		1	49	12.03	12.05	12.00	2
		25	0	10.98	11.00	11.06	3
		25	12	11.08	11.01	11.00	3
		25	25	11.00	10.99	11.03	3
		50	0	11.03	10.97	11.06	3
10M	256QAM	1	0	9.11	9.06	9.13	5
		1	24	9.09	9.17	9.20	5
		1	49	9.04	9.09	9.18	5
		25	0	9.09	9.15	9.14	5
		25	12	9.08	9.09	9.16	5
		25	25	9.08	9.14	9.13	5
		50	0	9.11	9.09	9.12	5
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	14.15	14.16	14.18	0
		1	12	14.03	13.97	14.09	0
		1	24	14.16	14.05	14.14	0
		12	0	13.31	13.20	13.27	1
		12	6	13.10	13.18	13.18	1
		12	13	13.13	13.10	13.11	1
		25	0	12.99	12.98	13.07	1
5M	16QAM	1	0	13.04	12.97	13.07	1
		1	12	12.94	12.87	12.97	1
		1	24	12.93	13.00	12.89	1
		12	0	12.10	12.00	12.03	2
		12	6	11.99	11.87	11.92	2
		12	13	11.98	11.95	12.06	2
		25	0	12.09	11.96	11.99	2
5M	64QAM	1	0	12.00	11.95	11.99	2
		1	12	12.01	12.00	11.93	2
		1	24	11.97	12.03	11.92	2
		12	0	10.88	11.00	10.97	3
		12	6	11.08	10.87	10.86	3
		12	13	10.86	10.96	10.96	3
		25	0	10.98	10.91	11.03	3
5M	256QAM	1	0	9.10	9.06	9.07	5
		1	12	9.07	9.15	9.15	5
		1	24	9.07	9.04	9.16	5
		12	0	9.13	9.05	9.17	5
		12	6	9.10	9.19	9.14	5
		12	13	9.12	9.19	9.08	5
		25	0	9.08	9.12	9.16	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	13.61	13.91	13.95	0
		1	50	13.59	13.89	13.93	0
		1	99	13.57	13.87	13.91	0
		50	0	12.53	12.83	12.87	1
		50	25	12.51	12.81	12.85	1
		50	50	12.47	12.77	12.81	1
		100	0	12.48	12.78	12.82	1
20M	16QAM	1	0	12.38	12.70	12.74	1
		1	50	12.43	12.66	12.75	1
		1	99	12.46	12.70	12.80	1
		50	0	11.37	11.75	11.70	2
		50	25	11.44	11.72	11.72	2
		50	50	11.38	11.73	11.75	2
		100	0	11.38	11.73	11.75	2
20M	64QAM	1	0	11.41	11.68	11.80	2
		1	50	11.36	11.71	11.75	2
		1	99	11.37	11.76	11.73	2
		50	0	10.46	10.74	10.78	3
		50	25	10.42	10.72	10.75	3
		50	50	10.38	10.67	10.77	3
		100	0	10.38	10.67	10.78	3
20M	256QAM	1	0	8.51	8.90	8.95	5
		1	50	8.60	8.89	8.86	5
		1	99	8.53	8.84	8.95	5
		50	0	8.60	8.91	8.87	5
		50	25	8.60	8.88	8.86	5
		50	50	8.53	8.85	8.94	5
		100	0	8.52	8.91	8.92	5
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	13.55	13.83	13.93	0
		1	37	13.51	13.80	13.91	0
		1	74	13.50	13.79	13.85	0
		36	0	12.51	12.78	12.77	1
		36	19	12.47	12.75	12.80	1
		36	39	12.45	12.74	12.76	1
		75	0	12.48	12.73	12.79	1
15M	16QAM	1	0	12.29	12.66	12.74	1
		1	37	12.39	12.61	12.73	1
		1	74	12.39	12.70	12.71	1
		36	0	11.28	11.69	11.68	2
		36	19	11.34	11.62	11.69	2
		36	39	11.29	11.68	11.71	2
		75	0	11.34	11.73	11.75	2
15M	64QAM	1	0	11.33	11.64	11.72	2
		1	37	11.32	11.68	11.71	2
		1	74	11.32	11.73	11.70	2
		36	0	10.38	10.70	10.69	3
		36	19	10.34	10.67	10.73	3
		36	39	10.37	10.64	10.70	3
		75	0	10.35	10.66	10.77	3
15M	256QAM	1	0	8.49	8.81	8.91	5
		1	37	8.55	8.88	8.81	5
		1	74	8.43	8.76	8.92	5
		36	0	8.51	8.88	8.83	5
		36	19	8.53	8.80	8.80	5
		36	39	8.52	8.83	8.86	5
		75	0	8.51	8.86	8.84	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	13.48	13.79	13.69	0
		1	24	13.48	13.82	13.67	0
		1	49	13.35	13.83	13.74	0
		25	0	12.31	12.67	12.72	1
		25	12	12.35	12.69	12.69	1
		25	25	12.32	12.67	12.60	1
		50	0	12.47	12.60	12.66	1
10M	16QAM	1	0	12.21	12.56	12.64	1
		1	24	12.36	12.63	12.70	1
		1	49	12.24	12.59	12.69	1
		25	0	11.30	11.58	11.49	2
		25	12	11.27	11.52	11.49	2
		25	25	11.28	11.65	11.74	2
		50	0	11.31	11.52	11.69	2
10M	64QAM	1	0	11.37	11.53	11.67	2
		1	24	11.23	11.55	11.75	2
		1	49	11.25	11.63	11.68	2
		25	0	10.34	10.63	10.72	3
		25	12	10.25	10.68	10.69	3
		25	25	10.21	10.53	10.67	3
		50	0	10.18	10.66	10.57	3
10M	256QAM	1	0	8.47	8.86	8.88	5
		1	24	8.50	8.81	8.79	5
		1	49	8.51	8.74	8.93	5
		25	0	8.53	8.90	8.87	5
		25	12	8.57	8.80	8.82	5
		25	25	8.48	8.85	8.84	5
		50	0	8.47	8.90	8.91	5
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	13.46	13.76	13.88	0
		1	12	13.46	13.69	13.78	0
		1	24	13.36	13.80	13.85	0
		12	0	12.40	12.67	12.74	1
		12	6	12.45	12.75	12.70	1
		12	13	12.40	12.65	12.75	1
		25	0	12.46	12.66	12.69	1
5M	16QAM	1	0	12.21	12.52	12.67	1
		1	12	12.34	12.64	12.56	1
		1	24	12.25	12.55	12.69	1
		12	0	11.23	11.60	11.60	2
		12	6	11.23	11.64	11.54	2
		12	13	11.27	11.69	11.64	2
		25	0	11.25	11.63	11.57	2
5M	64QAM	1	0	11.27	11.50	11.69	2
		1	12	11.14	11.60	11.66	2
		1	24	11.20	11.68	11.55	2
		12	0	10.34	10.71	10.60	3
		12	6	10.28	10.66	10.64	3
		12	13	10.25	10.50	10.61	3
		25	0	10.18	10.65	10.66	3
5M	256QAM	1	0	8.41	8.87	8.87	5
		1	12	8.55	8.80	8.81	5
		1	24	8.46	8.82	8.91	5
		12	0	8.59	8.85	8.81	5
		12	6	8.51	8.87	8.76	5
		12	13	8.53	8.82	8.90	5
		25	0	8.42	8.81	8.84	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	13.50	13.75	13.78	0
		1	7	13.37	13.73	13.85	0
		1	14	13.37	13.73	13.84	0
		8	0	12.43	12.70	12.80	1
		8	3	12.29	12.72	12.74	1
		8	7	12.29	12.64	12.77	1
		15	0	12.30	12.68	12.64	1
3M	16QAM	1	0	12.29	12.54	12.61	1
		1	7	12.31	12.57	12.57	1
		1	14	12.44	12.69	12.64	1
		8	0	11.26	11.73	11.57	2
		8	3	11.34	11.57	11.63	2
		8	7	11.23	11.58	11.68	2
		15	0	11.25	11.56	11.67	2
3M	64QAM	1	0	11.37	11.53	11.64	2
		1	7	11.31	11.61	11.65	2
		1	14	11.22	11.70	11.55	2
		8	0	10.33	10.61	10.60	3
		8	3	10.35	10.49	10.68	3
		8	7	10.16	10.49	10.60	3
		15	0	10.28	10.58	10.61	3
3M	256QAM	1	0	8.44	8.90	8.86	5
		1	7	8.59	8.87	8.80	5
		1	14	8.53	8.81	8.85	5
		8	0	8.57	8.86	8.85	5
		8	3	8.57	8.82	8.81	5
		8	7	8.52	8.84	8.91	5
		15	0	8.46	8.83	8.87	5
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	13.36	13.68	13.79	0
		1	2	13.53	13.66	13.71	0
		1	5	13.48	13.80	13.82	0
		3	0	13.59	13.82	13.85	0
		3	1	13.37	13.74	13.77	0
		3	3	13.51	13.75	13.77	0
		6	0	12.53	12.75	12.74	1
1.4M	16QAM	1	0	12.37	12.76	12.77	1
		1	2	12.59	12.74	12.88	1
		1	5	12.46	12.72	12.80	1
		3	0	12.48	12.80	12.83	1
		3	1	12.48	12.80	12.84	1
		3	3	12.47	12.78	12.88	1
		6	0	11.41	11.79	11.75	2
1.4M	64QAM	1	0	11.42	11.75	11.90	2
		1	2	11.57	11.67	11.86	2
		1	5	11.43	11.77	11.87	2
		3	0	11.54	11.74	11.76	2
		3	1	11.57	11.80	11.80	2
		3	3	11.44	11.83	11.82	2
		6	0	10.50	10.74	10.74	3
1.4M	256QAM	1	0	8.42	8.87	8.85	5
		1	2	8.59	8.81	8.84	5
		1	5	8.45	8.81	8.87	5
		3	0	8.54	8.82	8.85	5
		3	1	8.50	8.87	8.78	5
		3	3	8.49	8.83	8.92	5
		6	0	8.51	8.87	8.83	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		18.52		0
		1	24		18.48		0
		1	49		18.45		0
		25	0		17.44		1
		25	12		17.42		1
		25	25		17.40		1
		50	0		17.41		1
10M	16QAM	1	0		17.31		1
		1	24		17.29		1
		1	49		17.29		1
		25	0		16.26		2
		25	12		16.27		2
		25	25		16.30		2
		50	0		16.32		2
10M	64QAM	1	0		16.30		2
		1	24		16.31		2
		1	49		16.27		2
		25	0		15.32		3
		25	12		15.28		3
		25	25		15.33		3
		50	0		15.24		3
10M	256QAM	1	0		13.34		5
		1	24		13.42		5
		1	49		13.41		5
		25	0		13.38		5
		25	12		13.38		5
		25	25		13.44		5
		50	0		13.41		5
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	18.43	18.44	18.39	0
		1	12	18.34	18.45	18.40	0
		1	24	18.33	18.43	18.32	0
		12	0	17.36	17.39	17.36	1
		12	6	17.31	17.36	17.30	1
		12	13	17.27	17.35	17.33	1
		25	0	17.27	17.38	17.30	1
5M	16QAM	1	0	17.23	17.23	17.26	1
		1	12	17.30	17.20	17.22	1
		1	24	17.23	17.21	17.26	1
		12	0	16.21	16.24	16.21	2
		12	6	16.30	16.20	16.25	2
		12	13	16.24	16.23	16.29	2
		25	0	16.16	16.27	16.26	2
5M	64QAM	1	0	16.30	16.29	16.27	2
		1	12	16.27	16.31	16.19	2
		1	24	16.23	16.22	16.26	2
		12	0	15.24	15.26	15.18	3
		12	6	15.27	15.18	15.26	3
		12	13	15.20	15.27	15.31	3
		25	0	15.21	15.14	15.32	3
5M	256QAM	1	0	13.37	13.40	13.36	5
		1	12	13.37	13.37	13.39	5
		1	24	13.36	13.30	13.35	5
		12	0	13.41	13.37	13.31	5
		12	6	13.28	13.38	13.43	5
		12	13	13.41	13.30	13.34	5
		25	0	13.36	13.29	13.38	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	18.41	18.45	18.36	0
		1	50	18.39	18.43	18.34	0
		1	99	18.37	18.41	18.32	0
		50	0	17.24	17.28	17.19	1
		50	25	17.21	17.25	17.16	1
		50	50	17.19	17.23	17.14	1
		100	0	17.21	17.25	17.16	1
20M	16QAM	1	0	17.19	17.20	17.10	1
		1	50	17.19	17.22	17.13	1
		1	99	17.15	17.20	17.06	1
		50	0	16.11	16.23	16.08	2
		50	25	16.13	16.21	16.04	2
		50	50	16.12	16.18	16.14	2
		100	0	16.15	16.15	16.13	2
20M	64QAM	1	0	16.14	16.21	16.12	2
		1	50	16.15	16.18	16.14	2
		1	99	16.18	16.23	16.05	2
		50	0	15.10	15.17	15.14	3
		50	25	15.17	15.18	15.09	3
		50	50	15.12	15.16	15.07	3
		100	0	15.19	15.16	15.04	3
20M	256QAM	1	0	13.38	13.36	13.29	5
		1	50	13.35	13.45	13.34	5
		1	99	13.36	13.35	13.28	5
		50	0	13.35	13.43	13.31	5
		50	25	13.32	13.35	13.27	5
		50	50	13.39	13.37	13.29	5
		100	0	13.37	13.36	13.35	5
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	18.39	18.44	18.36	0
		1	37	18.36	18.34	18.29	0
		1	74	18.37	18.39	18.29	0
		36	0	17.19	17.24	17.16	1
		36	19	17.18	17.16	17.06	1
		36	39	17.19	17.16	17.11	1
		75	0	17.21	17.20	17.14	1
15M	16QAM	1	0	17.18	17.16	17.04	1
		1	37	17.14	17.20	17.06	1
		1	74	17.10	17.17	17.06	1
		36	0	16.06	16.14	16.06	2
		36	19	16.06	16.15	15.97	2
		36	39	16.09	16.16	16.05	2
		75	0	16.07	16.15	16.03	2
15M	64QAM	1	0	16.09	16.17	16.06	2
		1	37	16.11	16.09	16.09	2
		1	74	16.15	16.23	15.96	2
		36	0	15.00	15.11	15.06	3
		36	19	15.12	15.14	15.07	3
		36	39	15.09	15.07	15.01	3
		75	0	15.09	15.06	14.95	3
15M	256QAM	1	0	13.32	13.32	13.20	5
		1	37	13.31	13.38	13.31	5
		1	74	13.28	13.29	13.22	5
		36	0	13.33	13.34	13.21	5
		36	19	13.28	13.32	13.26	5
		36	39	13.31	13.29	13.26	5
		75	0	13.27	13.26	13.25	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	18.37	18.30	18.25	0
		1	24	18.22	18.32	18.14	0
		1	49	18.37	18.36	18.27	0
		25	0	17.04	17.15	17.11	1
		25	12	17.16	17.06	17.04	1
		25	25	17.06	17.15	17.09	1
		50	0	17.06	17.10	17.14	1
10M	16QAM	1	0	17.14	17.02	17.00	1
		1	24	17.01	17.14	16.97	1
		1	49	16.98	17.05	17.00	1
		25	0	15.92	15.99	16.00	2
		25	12	15.99	16.02	15.89	2
		25	25	15.95	16.09	16.03	2
		50	0	16.00	16.11	16.01	2
10M	64QAM	1	0	15.97	16.16	16.04	2
		1	24	15.98	15.98	16.07	2
		1	49	16.11	16.09	15.94	2
		25	0	14.97	15.03	14.94	3
		25	12	14.97	15.05	14.96	3
		25	25	14.94	15.05	14.94	3
		50	0	15.07	14.93	14.89	3
10M	256QAM	1	0	13.31	13.32	13.25	5
		1	24	13.30	13.39	13.28	5
		1	49	13.36	13.35	13.19	5
		25	0	13.34	13.42	13.30	5
		25	12	13.32	13.29	13.26	5
		25	25	13.37	13.27	13.26	5
		50	0	13.29	13.35	13.26	5
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	18.26	18.39	18.12	0
		1	12	18.26	18.25	18.11	0
		1	24	18.30	18.34	18.16	0
		12	0	17.07	17.11	17.07	1
		12	6	17.11	17.16	17.04	1
		12	13	17.19	17.01	17.04	1
		25	0	17.08	17.09	17.05	1
5M	16QAM	1	0	17.10	17.11	16.95	1
		1	12	17.02	17.09	17.04	1
		1	24	17.07	17.03	16.96	1
		12	0	15.97	15.99	15.99	2
		12	6	16.03	16.15	15.92	2
		12	13	16.04	16.12	16.03	2
		25	0	16.06	16.12	16.00	2
5M	64QAM	1	0	16.09	16.07	16.05	2
		1	12	16.08	15.98	16.08	2
		1	24	16.01	16.12	15.90	2
		12	0	14.86	15.08	14.91	3
		12	6	15.01	15.03	14.99	3
		12	13	15.04	15.01	14.99	3
		25	0	14.95	14.92	14.85	3
5M	256QAM	1	0	13.32	13.31	13.29	5
		1	12	13.28	13.35	13.26	5
		1	24	13.35	13.35	13.27	5
		12	0	13.35	13.43	13.22	5
		12	6	13.31	13.32	13.20	5
		12	13	13.33	13.36	13.19	5
		25	0	13.29	13.31	13.28	5

LTE Conducted Power_ENDC_Tablet_Ant 2									
LTE Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	14.63	14.82	14.83	15.15	15.03	0
		1	50	14.61	14.80	14.81	15.13	15.01	0
		1	99	14.59	14.78	14.79	15.11	14.99	0
		50	0	13.57	13.76	13.77	14.09	13.97	1
		50	25	13.54	13.73	13.74	14.06	13.94	1
		50	50	13.52	13.71	13.72	14.04	13.92	1
		100	0	13.53	13.72	13.73	14.05	13.93	1
20M	16QAM	1	0	13.42	13.64	13.61	13.96	13.85	1
		1	50	13.47	13.63	13.69	13.96	13.87	1
		1	99	13.49	13.65	13.67	14.00	13.85	1
		50	0	12.50	12.65	12.66	12.95	12.91	2
		50	25	12.43	12.63	12.66	12.99	12.83	2
		50	50	12.45	12.68	12.71	13.01	12.89	2
		100	0	12.41	12.69	12.68	12.98	12.84	2
20M	64QAM	1	0	12.46	12.65	12.67	13.03	12.87	2
		1	50	12.46	12.67	12.61	13.01	12.86	2
		1	99	12.49	12.66	12.71	12.97	12.91	2
		50	0	11.46	11.60	11.66	11.95	11.89	3
		50	25	11.51	11.62	11.63	11.96	11.82	3
		50	50	11.48	11.62	11.62	12.03	11.88	3
		100	0	11.43	11.67	11.63	12.00	11.88	3
20M	256QAM	1	0	9.60	9.78	9.76	10.10	9.93	5
		1	50	9.57	9.73	9.76	10.09	9.95	5
		1	99	9.62	9.80	9.75	10.06	9.94	5
		50	0	9.60	9.82	9.80	10.09	9.97	5
		50	25	9.58	9.82	9.73	10.08	10.03	5
		50	50	9.62	9.82	9.81	10.12	9.97	5
		100	0	9.53	9.79	9.76	10.15	9.93	5
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	14.62	14.74	14.76	15.06	14.98	0
		1	37	14.56	14.73	14.81	15.11	14.97	0
		1	74	14.55	14.75	14.69	15.06	14.92	0
		36	0	13.57	13.66	13.70	14.03	13.92	1
		36	19	13.50	13.67	13.64	14.06	13.93	1
		36	39	13.46	13.66	13.67	13.99	13.92	1
		75	0	13.49	13.65	13.72	14.05	13.83	1
15M	16QAM	1	0	13.35	13.56	13.61	13.94	13.84	1
		1	37	13.42	13.59	13.63	13.91	13.86	1
		1	74	13.46	13.62	13.59	13.99	13.75	1
		36	0	12.43	12.61	12.65	12.95	12.81	2
		36	19	12.41	12.61	12.65	12.97	12.81	2
		36	39	12.38	12.61	12.61	12.93	12.81	2
		75	0	12.36	12.61	12.63	12.96	12.79	2
15M	64QAM	1	0	12.44	12.65	12.57	13.03	12.81	2
		1	37	12.37	12.63	12.52	12.92	12.77	2
		1	74	12.45	12.61	12.67	12.90	12.91	2
		36	0	11.43	11.60	11.64	11.93	11.79	3
		36	19	11.41	11.54	11.62	11.87	11.78	3
		36	39	11.47	11.59	11.60	11.95	11.78	3
		75	0	11.36	11.62	11.55	11.95	11.80	3
15M	256QAM	1	0	9.58	9.71	9.70	10.10	9.90	5
		1	37	9.55	9.63	9.69	10.05	9.95	5
		1	74	9.52	9.76	9.67	10.03	9.87	5
		36	0	9.52	9.72	9.70	10.06	9.95	5
		36	19	9.49	9.76	9.70	10.04	9.98	5
		36	39	9.61	9.72	9.81	10.08	9.97	5
		75	0	9.44	9.78	9.75	10.13	9.93	5

LTE Conducted Power_ENDC_Tablet_Ant 2									
LTE Band 41									
BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	14.60	14.62	14.59	14.94	14.85	0
		1	24	14.50	14.59	14.64	15.00	14.77	0
		1	49	14.45	14.55	14.53	14.93	14.91	0
		25	0	13.56	13.45	13.60	13.91	13.79	1
		25	12	13.50	13.54	13.56	13.90	13.83	1
		25	25	13.33	13.43	13.52	13.89	13.86	1
		50	0	13.46	13.50	13.56	13.88	13.73	1
10M	16QAM	1	0	13.26	13.43	13.51	13.86	13.79	1
		1	24	13.34	13.48	13.47	13.78	13.84	1
		1	49	13.46	13.58	13.41	13.97	13.73	1
		25	0	12.38	12.47	12.60	12.77	12.70	2
		25	12	12.41	12.46	12.57	12.89	12.67	2
		25	25	12.26	12.58	12.57	12.92	12.67	2
		50	0	12.21	12.50	12.48	12.89	12.66	2
10M	64QAM	1	0	12.44	12.51	12.39	12.87	12.69	2
		1	24	12.36	12.57	12.44	12.88	12.66	2
		1	49	12.39	12.52	12.52	12.78	12.79	2
		25	0	11.35	11.48	11.47	11.84	11.69	3
		25	12	11.27	11.39	11.51	11.84	11.71	3
		25	25	11.40	11.47	11.41	11.80	11.67	3
		50	0	11.32	11.47	11.51	11.88	11.60	3
10M	256QAM	1	0	9.57	9.74	9.69	10.05	9.92	5
		1	24	9.53	9.64	9.69	10.04	9.85	5
		1	49	9.52	9.80	9.70	9.97	9.89	5
		25	0	9.57	9.79	9.80	10.01	9.88	5
		25	12	9.49	9.81	9.69	10.00	9.94	5
		25	25	9.54	9.80	9.79	10.08	9.87	5
		50	0	9.45	9.74	9.69	10.08	9.87	5
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	14.49	14.73	14.57	14.89	14.75	0
		1	12	14.44	14.61	14.58	15.00	14.73	0
		1	24	14.45	14.73	14.52	14.89	14.90	0
		12	0	13.45	13.64	13.50	13.83	13.78	1
		12	6	13.39	13.59	13.47	13.88	13.79	1
		12	13	13.39	13.53	13.46	13.79	13.76	1
		25	0	13.48	13.52	13.52	13.82	13.70	1
5M	16QAM	1	0	13.23	13.47	13.46	13.86	13.69	1
		1	12	13.34	13.58	13.44	13.68	13.76	1
		1	24	13.45	13.50	13.34	13.95	13.65	1
		12	0	12.28	12.50	12.56	12.71	12.65	2
		12	6	12.27	12.59	12.50	12.89	12.57	2
		12	13	12.34	12.55	12.48	12.83	12.64	2
		25	0	12.28	12.53	12.48	12.81	12.63	2
5M	64QAM	1	0	12.44	12.56	12.33	12.87	12.69	2
		1	12	12.22	12.60	12.39	12.80	12.63	2
		1	24	12.31	12.53	12.50	12.76	12.70	2
		12	0	11.33	11.59	11.42	11.79	11.65	3
		12	6	11.31	11.53	11.47	11.81	11.64	3
		12	13	11.41	11.54	11.40	11.78	11.65	3
		25	0	11.36	11.56	11.45	11.78	11.53	3
5M	256QAM	1	0	9.56	9.68	9.73	10.03	9.88	5
		1	12	9.50	9.68	9.71	10.02	9.93	5
		1	24	9.56	9.78	9.72	9.99	9.85	5
		12	0	9.50	9.80	9.74	9.99	9.97	5
		12	6	9.56	9.77	9.65	10.06	9.94	5
		12	13	9.54	9.82	9.74	10.08	9.93	5
		25	0	9.52	9.75	9.69	10.05	9.85	5

LTE Conducted Power_ENDC_Tablet_Ant 2

LTE Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	10.12	10.05	10.11	10.02	0
		1	50	10.09	10.02	10.08	9.99	0
		1	99	10.05	9.98	10.04	9.95	0
		50	0	8.97	8.90	8.96	8.87	1
		50	25	8.95	8.88	8.94	8.85	1
		50	50	8.92	8.85	8.91	8.82	1
		100	0	8.95	8.88	8.94	8.85	1
20M	16QAM	1	0	8.92	8.84	8.92	8.81	1
		1	50	8.92	8.81	8.84	8.74	1
		1	99	8.83	8.76	8.85	8.74	1
		50	0	7.91	7.77	7.85	7.79	2
		50	25	7.91	7.78	7.84	7.81	2
		50	50	7.83	7.77	7.82	7.76	2
		100	0	7.90	7.78	7.83	7.82	2
20M	64QAM	1	0	7.88	7.76	7.89	7.77	2
		1	50	7.83	7.77	7.91	7.80	2
		1	99	7.90	7.85	7.86	7.83	2
		50	0	6.84	6.78	6.87	6.81	3
		50	25	6.90	6.76	6.86	6.74	3
		50	50	6.87	6.84	6.92	6.80	3
		100	0	6.85	6.84	6.86	6.77	3
20M	256QAM	1	0	5.07	5.04	5.04	5.00	5
		1	50	5.10	5.02	5.07	4.99	5
		1	99	5.10	5.04	5.09	5.02	5
		50	0	5.03	5.01	5.03	4.97	5
		50	25	5.05	5.03	5.07	4.96	5
		50	50	5.04	5.02	5.02	4.94	5
		100	0	5.10	4.96	5.03	5.00	5
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	10.11	10.05	10.07	9.93	0
		1	37	10.02	9.97	10.05	9.96	0
		1	74	9.96	9.90	9.97	9.87	0
		36	0	8.94	8.81	8.96	8.78	1
		36	19	8.93	8.83	8.87	8.79	1
		36	39	8.85	8.80	8.90	8.75	1
		75	0	8.93	8.87	8.86	8.77	1
15M	16QAM	1	0	8.92	8.81	8.84	8.71	1
		1	37	8.89	8.80	8.82	8.69	1
		1	74	8.74	8.71	8.81	8.69	1
		36	0	7.90	7.75	7.82	7.78	2
		36	19	7.87	7.68	7.84	7.80	2
		36	39	7.82	7.71	7.73	7.67	2
		75	0	7.82	7.71	7.79	7.73	2
15M	64QAM	1	0	7.82	7.74	7.88	7.77	2
		1	37	7.74	7.77	7.84	7.70	2
		1	74	7.84	7.82	7.81	7.80	2
		36	0	6.83	6.72	6.78	6.76	3
		36	19	6.89	6.71	6.86	6.64	3
		36	39	6.82	6.78	6.84	6.77	3
		75	0	6.79	6.83	6.84	6.77	3
15M	256QAM	1	0	5.04	5.00	4.97	5.00	5
		1	37	5.10	5.00	5.01	4.90	5
		1	74	5.05	5.01	4.99	4.92	5
		36	0	4.93	4.92	5.02	4.96	5
		36	19	5.03	5.02	4.97	4.93	5
		36	39	5.03	4.93	4.92	4.84	5
		75	0	5.01	4.89	4.93	4.98	5

LTE Conducted Power_ENDC_Tablet_Ant 2								
LTE Band 48								
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	9.98	9.96	9.98	9.83	0
		1	24	9.92	9.96	9.96	9.87	0
		1	49	9.90	9.81	9.82	9.82	0
		25	0	8.79	8.72	8.94	8.72	1
		25	12	8.88	8.69	8.84	8.71	1
		25	25	8.74	8.71	8.84	8.68	1
		50	0	8.86	8.74	8.72	8.75	1
10M	16QAM	1	0	8.84	8.80	8.78	8.65	1
		1	24	8.86	8.76	8.79	8.62	1
		1	49	8.61	8.69	8.68	8.66	1
		25	0	7.85	7.75	7.73	7.77	2
		25	12	7.81	7.62	7.82	7.73	2
		25	25	7.76	7.71	7.64	7.63	2
		50	0	7.72	7.68	7.66	7.70	2
10M	64QAM	1	0	7.67	7.59	7.88	7.72	2
		1	24	7.70	7.73	7.71	7.63	2
		1	49	7.81	7.69	7.66	7.71	2
		25	0	6.69	6.62	6.65	6.66	3
		25	12	6.78	6.65	6.82	6.61	3
		25	25	6.80	6.64	6.79	6.67	3
		50	0	6.71	6.78	6.75	6.76	3
10M	256QAM	1	0	5.03	5.02	5.00	4.99	5
		1	24	5.06	4.98	5.04	4.97	5
		1	49	5.10	5.03	5.02	5.00	5
		25	0	5.00	4.91	4.99	4.94	5
		25	12	4.99	4.97	5.05	4.89	5
		25	25	4.95	4.92	4.99	4.91	5
		50	0	5.01	4.96	5.01	4.96	5
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	9.99	9.90	9.96	9.78	0
		1	12	9.94	9.91	9.84	9.77	0
		1	24	9.88	9.88	9.77	9.80	0
		12	0	8.89	8.79	8.92	8.64	1
		12	6	8.88	8.81	8.80	8.68	1
		12	13	8.76	8.69	8.83	8.59	1
		25	0	8.89	8.78	8.58	8.72	1
5M	16QAM	1	0	8.77	8.71	8.82	8.61	1
		1	12	8.84	8.68	8.78	8.54	1
		1	24	8.67	8.65	8.81	8.57	1
		12	0	7.84	7.67	7.81	7.75	2
		12	6	7.81	7.58	7.69	7.67	2
		12	13	7.75	7.58	7.72	7.54	2
		25	0	7.82	7.60	7.76	7.69	2
5M	64QAM	1	0	7.82	7.63	7.87	7.70	2
		1	12	7.71	7.62	7.71	7.59	2
		1	24	7.74	7.76	7.69	7.62	2
		12	0	6.83	6.58	6.72	6.65	3
		12	6	6.78	6.68	6.74	6.55	3
		12	13	6.76	6.63	6.84	6.58	3
		25	0	6.79	6.74	6.71	6.76	3
5M	256QAM	1	0	5.00	5.04	5.02	4.95	5
		1	12	5.03	5.01	5.02	4.95	5
		1	24	5.02	5.04	5.06	4.98	5
		12	0	4.96	5.00	4.96	4.93	5
		12	6	5.02	4.94	5.04	4.87	5
		12	13	4.97	4.94	4.94	4.93	5
		25	0	5.06	4.87	4.97	4.91	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	17.51	17.46	17.45	0
		1	50	17.48	17.43	17.42	0
		1	99	17.45	17.40	17.39	0
		50	0	16.57	16.52	16.51	1
		50	25	16.54	16.49	16.48	1
		50	50	16.52	16.47	16.46	1
		100	0	16.55	16.50	16.49	1
20M	16QAM	1	0	16.53	16.47	16.40	1
		1	50	16.48	16.38	16.43	1
		1	99	16.51	16.46	16.45	1
		50	0	15.53	15.44	15.44	2
		50	25	15.44	15.47	15.38	2
		50	50	15.44	15.44	15.38	2
		100	0	15.49	15.41	15.46	2
20M	64QAM	1	0	15.44	15.48	15.42	2
		1	50	15.51	15.43	15.47	2
		1	99	15.52	15.47	15.42	2
		50	0	14.44	14.39	14.38	3
		50	25	14.46	14.38	14.43	3
		50	50	14.53	14.41	14.37	3
		100	0	14.49	14.39	14.37	3
20M	256QAM	1	0	12.47	12.44	12.36	5
		1	50	12.44	12.36	12.41	5
		1	99	12.44	12.39	12.35	5
		50	0	12.47	12.36	12.36	5
		50	25	12.50	12.39	12.38	5
		50	50	12.45	12.38	12.44	5
		100	0	12.50	12.44	12.41	5
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	17.40	17.35	17.33	0
		1	37	17.37	17.37	17.26	0
		1	74	17.32	17.19	17.19	0
		36	0	16.46	16.44	16.36	1
		36	19	16.48	16.29	16.20	1
		36	39	16.34	16.25	16.19	1
		75	0	16.43	16.38	16.23	1
15M	16QAM	1	0	16.41	16.38	16.29	1
		1	37	16.36	16.25	16.25	1
		1	74	16.35	16.36	16.34	1
		36	0	15.53	15.24	15.33	2
		36	19	15.35	15.42	15.23	2
		36	39	15.32	15.33	15.22	2
		75	0	15.40	15.34	15.34	2
15M	64QAM	1	0	15.40	15.29	15.31	2
		1	37	15.28	15.29	15.32	2
		1	74	15.37	15.32	15.23	2
		36	0	14.26	14.25	14.32	3
		36	19	14.42	14.22	14.23	3
		36	39	14.34	14.30	14.32	3
		75	0	14.38	14.35	14.24	3
15M	256QAM	1	0	12.41	12.42	12.26	5
		1	37	12.40	12.31	12.36	5
		1	74	12.34	12.31	12.35	5
		36	0	12.41	12.32	12.27	5
		36	19	12.42	12.37	12.36	5
		36	39	12.45	12.35	12.43	5
		75	0	12.44	12.42	12.34	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	17.44	17.36	17.40	0
		1	24	17.33	17.34	17.22	0
		1	49	17.22	17.25	17.31	0
		25	0	16.53	16.43	16.36	1
		25	12	16.50	16.38	16.26	1
		25	25	16.45	16.37	16.35	1
		50	0	16.48	16.44	16.40	1
10M	16QAM	1	0	16.39	16.36	16.21	1
		1	24	16.42	16.15	16.26	1
		1	49	16.44	16.34	16.25	1
		25	0	15.50	15.24	15.33	2
		25	12	15.28	15.34	15.30	2
		25	25	15.27	15.22	15.18	2
		50	0	15.26	15.33	15.36	2
10M	64QAM	1	0	15.29	15.38	15.33	2
		1	24	15.39	15.30	15.34	2
		1	49	15.40	15.40	15.29	2
		25	0	14.28	14.25	14.29	3
		25	12	14.32	14.27	14.25	3
		25	25	14.37	14.31	14.28	3
		50	0	14.36	14.36	14.17	3
10M	256QAM	1	0	12.45	12.35	12.35	5
		1	24	12.34	12.29	12.37	5
		1	49	12.38	12.36	12.28	5
		25	0	12.46	12.28	12.26	5
		25	12	12.46	12.34	12.32	5
		25	25	12.45	12.28	12.35	5
		50	0	12.41	12.40	12.39	5
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	17.49	17.32	17.36	0
		1	12	17.44	17.32	17.29	0
		1	24	17.27	17.18	17.31	0
		12	0	16.46	16.40	16.50	1
		12	6	16.45	16.29	16.30	1
		12	13	16.31	16.33	16.27	1
		25	0	16.47	16.44	16.32	1
5M	16QAM	1	0	16.31	16.30	16.21	1
		1	12	16.45	16.18	16.29	1
		1	24	16.32	16.31	16.37	1
		12	0	15.41	15.31	15.36	2
		12	6	15.31	15.43	15.24	2
		12	13	15.28	15.26	15.17	2
		25	0	15.39	15.29	15.35	2
5M	64QAM	1	0	15.28	15.28	15.35	2
		1	12	15.40	15.37	15.34	2
		1	24	15.30	15.39	15.38	2
		12	0	14.31	14.31	14.26	3
		12	6	14.37	14.18	14.28	3
		12	13	14.48	14.25	14.32	3
		25	0	14.34	14.34	14.14	3
5M	256QAM	1	0	12.41	12.44	12.31	5
		1	12	12.36	12.26	12.38	5
		1	24	12.36	12.35	12.35	5
		12	0	12.37	12.29	12.35	5
		12	6	12.48	12.31	12.37	5
		12	13	12.44	12.36	12.40	5
		25	0	12.50	12.44	12.33	5

LTE Conducted Power_ENDC_Tablet_Ant 2							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	17.49	17.43	17.41	0
		1	7	17.45	17.37	17.35	0
		1	14	17.35	17.31	17.31	0
		8	0	16.55	16.46	16.50	1
		8	3	16.51	16.40	16.40	1
		8	7	16.46	16.38	16.36	1
		15	0	16.48	16.45	16.46	1
3M	16QAM	1	0	16.44	16.41	16.33	1
		1	7	16.48	16.30	16.35	1
		1	14	16.44	16.37	16.38	1
		8	0	15.53	15.39	15.36	2
		8	3	15.42	15.44	15.32	2
		8	7	15.38	15.35	15.30	2
		15	0	15.41	15.39	15.39	2
3M	64QAM	1	0	15.43	15.38	15.42	2
		1	7	15.43	15.43	15.38	2
		1	14	15.44	15.44	15.38	2
		8	0	14.40	14.34	14.37	3
		8	3	14.45	14.29	14.35	3
		8	7	14.48	14.40	14.34	3
		15	0	14.46	14.38	14.27	3
3M	256QAM	1	0	12.47	12.36	12.28	5
		1	7	12.38	12.35	12.34	5
		1	14	12.43	12.31	12.30	5
		8	0	12.38	12.33	12.36	5
		8	3	12.41	12.31	12.35	5
		8	7	12.44	12.37	12.35	5
		15	0	12.50	12.35	12.33	5
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	17.50	17.32	17.34	0
		1	2	17.32	17.36	17.24	0
		1	5	17.29	17.30	17.35	0
		3	0	17.27	17.35	17.26	0
		3	1	17.34	17.28	17.35	0
		3	3	17.26	17.30	17.26	0
		6	0	16.31	16.42	16.22	1
1.4M	16QAM	1	0	16.35	16.29	16.31	1
		1	2	16.32	16.42	16.29	1
		1	5	16.35	16.36	16.36	1
		3	0	16.36	16.32	16.32	1
		3	1	16.25	16.29	16.25	1
		3	3	16.33	16.36	16.30	1
		6	0	15.40	15.39	15.39	2
1.4M	64QAM	1	0	15.50	15.40	15.48	2
		1	2	15.46	15.38	15.39	2
		1	5	15.33	15.33	15.33	2
		3	0	15.37	15.45	15.51	2
		3	1	15.38	15.42	15.34	2
		3	3	15.37	15.44	15.42	2
		6	0	14.36	14.37	14.41	3
1.4M	256QAM	1	0	12.42	12.44	12.33	5
		1	2	12.44	12.28	12.36	5
		1	5	12.41	12.36	12.26	5
		3	0	12.42	12.36	12.27	5
		3	1	12.44	12.38	12.33	5
		3	3	12.38	12.34	12.42	5
		6	0	12.40	12.35	12.34	5

NR Conducted Power_ENDC_SA

NR Band 2

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	20.61	20.67	20.72	0
20M	DFT-S QPSK	1	1	20.63	20.68	20.75	0
		1	53	20.55	20.60	20.67	0
		1	104	20.60	20.65	20.72	0
		50	0	19.57	19.62	19.69	1
		50	28	20.56	20.61	20.68	0
		50	56	19.53	19.58	19.65	1
		100	0	19.50	19.55	19.62	1
20M	DFT-S 16QAM	1	1	19.50	19.55	19.62	1
20M	DFT-S 64QAM	1	1	18.07	18.12	18.19	2.5
20M	DFT-S 256QAM	1	1	15.97	16.02	16.09	4.5
20M	CP QPSK	1	1	19.13	19.18	19.25	1.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	20.60	20.60	20.64	0
15M	DFT-S QPSK	1	1	20.62	20.65	20.73	0
		1	40	20.50	20.57	20.67	0
		1	77	20.54	20.64	20.62	0
		36	0	19.57	19.53	19.61	1
		36	22	20.55	20.53	20.59	0
		36	43	19.52	19.54	19.61	1
		75	0	19.41	19.48	19.62	1
15M	DFT-S 16QAM	1	1	19.48	19.47	19.58	1
15M	DFT-S 64QAM	1	1	18.05	18.12	18.17	2.5
15M	DFT-S 256QAM	1	1	15.97	16.00	16.08	4.5
15M	CP QPSK	1	1	19.11	19.12	19.20	1.5

NR Conducted Power_ENDC_SA

NR Band 2

BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	20.55	20.60	20.71	0
10M	DFT-S QPSK	1	1	20.59	20.59	20.67	0
		1	26	20.48	20.59	20.61	0
		1	50	20.53	20.64	20.66	0
		25	0	19.57	19.58	19.60	1
		25	14	20.54	20.53	20.59	0
		25	27	19.48	19.57	19.55	1
		50	0	19.44	19.52	19.52	1
10M	DFT-S 16QAM	1	1	19.47	19.50	19.56	1
10M	DFT-S 64QAM	1	1	17.99	18.06	18.10	2.5
10M	DFT-S 256QAM	1	1	15.96	16.02	16.02	4.5
10M	CP QPSK	1	1	19.08	19.09	19.18	1.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	20.60	20.57	20.62	0
5M	DFT-S QPSK	1	1	20.61	20.66	20.70	0
		1	13	20.50	20.50	20.57	0
		1	23	20.59	20.65	20.63	0
		12	0	19.51	19.52	19.63	1
		12	7	20.55	20.60	20.63	0
		12	13	19.50	19.58	19.64	1
		25	0	19.47	19.50	19.58	1
5M	DFT-S 16QAM	1	1	19.44	19.48	19.59	1
5M	DFT-S 64QAM	1	1	18.07	18.11	18.14	2.5
5M	DFT-S 256QAM	1	1	15.95	15.96	16.05	4.5
5M	CP QPSK	1	1	19.13	19.13	19.15	1.5

NR Conducted Power_ENDC_SA

NR Band 5

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	19.36	19.43	19.17	0
20M	DFT-S QPSK	1	1	19.45	19.56	19.37	0
		1	53	19.35	19.47	19.32	0
		1	104	19.40	19.52	19.37	0
		50	0	18.37	18.49	18.34	1
		50	28	19.36	19.48	19.33	0
		50	56	18.33	18.45	18.30	1
		100	0	18.30	18.42	18.27	1
20M	DFT-S 16QAM	1	1	18.30	18.42	18.27	1
20M	DFT-S 64QAM	1	1	16.87	16.99	16.84	2.5
20M	DFT-S 256QAM	1	1	14.77	14.89	14.74	4.5
20M	CP QPSK	1	1	17.93	18.05	17.90	1.5
BW	MCS Index	Channel		166300	167300	168300	3GPP MPR
		Frequency (MHz)		831.5	836.5	841.5	
15M	DFT-S PI/2 BPSK	1	1	19.40	19.47	19.29	0
15M	DFT-S QPSK	1	1	19.42	19.52	19.38	0
		1	40	19.30	19.44	19.32	0
		1	77	19.34	19.51	19.27	0
		36	0	18.37	18.40	18.26	1
		36	22	19.35	19.40	19.24	0
		36	43	18.32	18.41	18.26	1
		75	0	18.21	18.35	18.27	1
15M	DFT-S 16QAM	1	1	18.28	18.34	18.23	1
15M	DFT-S 64QAM	1	1	16.85	16.99	16.82	2.5
15M	DFT-S 256QAM	1	1	14.77	14.87	14.73	4.5
15M	CP QPSK	1	1	17.91	17.99	17.85	1.5

NR Conducted Power_ENDC_SA

NR Band 5

BW	MCS Index	Channel		165800	167300	168800	3GPP MPR
		Frequency (MHz)		829	836.5	844	
10M	DFT-S PI/2 BPSK	1	1	19.35	19.47	19.36	0
10M	DFT-S QPSK	1	1	19.39	19.46	19.32	0
		1	26	19.28	19.46	19.26	0
		1	50	19.33	19.51	19.31	0
		25	0	18.37	18.45	18.25	1
		25	14	19.34	19.40	19.24	0
		25	27	18.28	18.44	18.20	1
		50	0	18.24	18.39	18.17	1
10M	DFT-S 16QAM	1	1	18.27	18.37	18.21	1
10M	DFT-S 64QAM	1	1	16.79	16.93	16.75	2.5
10M	DFT-S 256QAM	1	1	14.76	14.89	14.67	4.5
10M	CP QPSK	1	1	17.88	17.96	17.83	1.5
BW	MCS Index	Channel		165300	167300	169300	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	DFT-S PI/2 BPSK	1	1	19.40	19.44	19.27	0
5M	DFT-S QPSK	1	1	19.41	19.53	19.35	0
		1	13	19.30	19.37	19.22	0
		1	23	19.39	19.52	19.28	0
		12	0	18.31	18.39	18.28	1
		12	7	19.35	19.47	19.28	0
		12	13	18.30	18.45	18.29	1
		25	0	18.27	18.37	18.23	1
5M	DFT-S 16QAM	1	1	18.24	18.35	18.24	1
5M	DFT-S 64QAM	1	1	16.87	16.98	16.79	2.5
5M	DFT-S 256QAM	1	1	14.75	14.83	14.70	4.5
5M	CP QPSK	1	1	17.93	18.00	17.80	1.5

NR Conducted Power_ENDC_SA

NR Band 7

BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	20.02	20.28	20.30	0
20M	DFT-S QPSK	1	1	20.18	20.26	20.44	0
		1	53	20.15	20.16	20.32	0
		1	104	20.12	20.23	20.26	0
		50	0	19.33	19.51	19.61	1
		50	28	20.12	20.16	20.32	0
		50	56	19.37	19.49	19.59	1
		100	0	19.54	19.44	19.64	1
20M	DFT-S 16QAM	1	1	19.54	19.71	19.71	1
20M	DFT-S 64QAM	1	1	17.81	17.85	18.01	2.5
20M	DFT-S 256QAM	1	1	15.94	16.01	16.13	4.5
20M	CP QPSK	1	1	18.96	18.98	19.13	1.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	20.07	20.18	20.27	0
15M	DFT-S QPSK	1	1	20.18	20.24	20.42	0
		1	40	20.14	20.26	20.43	0
		1	77	20.12	20.14	20.31	0
		36	0	19.38	19.45	19.64	1
		36	22	20.16	20.19	20.41	0
		36	43	19.36	19.50	19.54	1
		75	0	19.45	19.41	19.58	1
15M	DFT-S 16QAM	1	1	19.59	19.66	19.79	1
15M	DFT-S 64QAM	1	1	17.84	17.80	17.98	2.5
15M	DFT-S 256QAM	1	1	15.95	16.02	16.12	4.5
15M	CP QPSK	1	1	18.92	19.02	19.13	1.5

NR Conducted Power_ENDC_SA

NR Band 7

BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	20.04	20.09	20.32	0
10M	DFT-S QPSK	1	1	20.03	20.21	20.38	0
		1	26	20.17	20.01	20.35	0
		1	50	20.12	20.21	20.30	0
		25	0	19.32	19.49	19.55	1
		25	14	20.10	20.20	20.26	0
		25	27	19.16	19.30	19.44	1
		50	0	19.35	19.40	19.46	1
10M	DFT-S 16QAM	1	1	19.41	19.58	19.72	1
10M	DFT-S 64QAM	1	1	17.78	17.86	17.95	2.5
10M	DFT-S 256QAM	1	1	15.95	16.08	15.99	4.5
10M	CP QPSK	1	1	18.87	19.09	19.12	1.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	20.16	20.17	20.25	0
5M	DFT-S QPSK	1	1	20.12	20.26	20.29	0
		1	13	20.17	20.25	20.37	0
		1	23	19.99	20.14	20.06	0
		12	0	19.35	19.32	19.57	1
		12	7	20.03	20.11	20.22	0
		12	13	19.22	19.34	19.33	1
		25	0	19.46	19.30	19.47	1
5M	DFT-S 16QAM	1	1	19.46	19.67	19.75	1
5M	DFT-S 64QAM	1	1	17.75	17.70	17.83	2.5
5M	DFT-S 256QAM	1	1	15.76	15.95	15.95	4.5
5M	CP QPSK	1	1	18.88	19.03	19.07	1.5

NR Conducted Power_ENDC_SA

NR Band 25

BW	MCS Index	Channel		372000	376500	381000	3GPP MPR
		Frequency (MHz)		1860	1882.5	1905	
20M	DFT-S PI/2 BPSK	1	1	19.56	19.65	20.08	0
20M	DFT-S QPSK	1	1	19.59	19.69	20.11	0
		1	53	19.54	19.59	20.03	0
		1	104	19.53	19.56	20.00	0
		50	0	18.52	18.57	19.01	1
		50	28	19.56	19.62	20.06	0
		50	56	18.53	18.52	18.93	1
		100	0	18.55	18.59	19.03	1
20M	DFT-S 16QAM	1	1	18.52	18.53	18.90	1
20M	DFT-S 64QAM	1	1	17.03	17.13	17.57	2.5
20M	DFT-S 256QAM	1	1	15.02	15.03	15.47	4.5
20M	CP QPSK	1	1	18.11	18.21	18.65	1.5
BW	MCS Index	Channel		371500	376500	381500	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	DFT-S PI/2 BPSK	1	1	19.52	19.65	20.08	0
15M	DFT-S QPSK	1	1	19.59	19.69	20.06	0
		1	40	19.54	19.56	19.95	0
		1	77	19.52	19.50	19.98	0
		36	0	18.51	18.50	18.97	1
		36	22	19.53	19.55	20.06	0
		36	43	18.53	18.52	18.84	1
		75	0	18.52	18.53	19.02	1
15M	DFT-S 16QAM	1	1	18.53	18.54	18.90	1
15M	DFT-S 64QAM	1	1	17.02	17.12	17.55	2.5
15M	DFT-S 256QAM	1	1	15.02	15.03	15.42	4.5
15M	CP QPSK	1	1	18.05	18.12	18.63	1.5

NR Conducted Power_ENDC_SA

NR Band 25

BW	MCS Index	Channel		371000	376500	382000	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	DFT-S PI/2 BPSK	1	1	19.53	19.64	20.03	0
10M	DFT-S QPSK	1	1	19.52	19.61	20.02	0
		1	26	19.54	19.54	19.97	0
		1	50	19.54	19.53	19.97	0
		25	0	18.55	18.54	18.97	1
		25	14	19.52	19.61	20.04	0
		25	27	18.54	18.52	18.88	1
		50	0	18.53	18.53	19.02	1
10M	DFT-S 16QAM	1	1	18.53	18.55	18.89	1
10M	DFT-S 64QAM	1	1	17.02	17.06	17.54	2.5
10M	DFT-S 256QAM	1	1	15.03	15.02	15.40	4.5
10M	CP QPSK	1	1	18.10	18.17	18.59	1.5
BW	MCS Index	Channel		370500	376500	382500	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	DFT-S PI/2 BPSK	1	1	19.52	19.59	20.05	0
5M	DFT-S QPSK	1	1	19.57	19.68	20.06	0
		1	13	19.53	19.59	19.96	0
		1	23	19.52	19.54	19.97	0
		12	0	19.52	18.53	19.00	1
		12	7	19.51	19.62	20.03	0
		12	13	18.51	18.53	18.84	1
		25	0	18.52	18.51	18.97	1
5M	DFT-S 16QAM	1	1	18.55	18.53	18.90	1
5M	DFT-S 64QAM	1	1	17.06	17.09	17.56	2.5
5M	DFT-S 256QAM	1	1	15.03	15.02	15.45	4.5
5M	CP QPSK	1	1	18.11	18.13	18.61	1.5

NR Conducted Power_ENDC_SA

NR Band 30

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			462000		
		Frequency (MHz)			2310		
10M	DFT-S PI/2 BPSK	1	1		18.45		0
10M	DFT-S QPSK	1	1		18.49		0
		1	26		18.43		0
		1	50		18.45		0
		25	0		17.51		1
		25	14		18.46		0
		25	27		17.49		1
		50	0		17.52		1
10M	DFT-S 16QAM	1	1		17.48		1
10M	DFT-S 64QAM	1	1		16.02		2.5
10M	DFT-S 256QAM	1	1		13.96		4.5
10M	CP QPSK	1	1		17.08		1.5
BW	MCS Index	Channel		461500	462000	462500	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	DFT-S PI/2 BPSK	1	1	18.39	18.42	18.36	0
5M	DFT-S QPSK	1	1	18.42	18.46	18.45	0
		1	13	18.31	18.36	18.34	0
		1	23	18.38	18.37	18.38	0
		12	0	17.37	17.45	17.43	1
		12	7	18.32	18.45	18.40	0
		12	13	17.38	17.39	17.42	1
		25	0	17.45	17.51	17.38	1
5M	DFT-S 16QAM	1	1	17.37	17.41	17.37	1
5M	DFT-S 64QAM	1	1	15.97	15.96	15.96	2.5
5M	DFT-S 256QAM	1	1	13.90	13.90	13.90	4.5
5M	CP QPSK	1	1	16.94	17.02	16.96	1.5

NR Conducted Power_ENDC_SA

NR Band 66

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		346000	349000	352000	
		Frequency (MHz)		1730	1745	1760	
40M	DFT-S PI/2 BPSK	1	1	19.07	19.14	19.11	0
40M	DFT-S QPSK	1	1	19.09	19.16	19.13	0
		1	108	19.05	19.12	19.09	0
		1	214	19.02	19.09	19.06	0
		108	0	18.02	18.05	18.04	1
		108	54	19.06	19.13	19.10	0
		108	108	18.02	18.04	18.03	1
		216	0	18.01	18.06	18.03	1
40M	DFT-S 16QAM	1	1	18.01	18.03	18.02	1
40M	DFT-S 64QAM	1	1	16.56	16.63	16.60	2.5
40M	DFT-S 256QAM	1	1	14.51	14.54	14.52	4.5
40M	CP QPSK	1	1	17.55	17.62	17.59	1.5
BW	MCS Index	Channel		345000	349000	353000	3GPP MPR
		Frequency (MHz)		1725	1745	1765	
30M	DFT-S PI/2 BPSK	1	1	19.02	19.07	19.07	0
30M	DFT-S QPSK	1	1	19.02	19.15	19.08	0
		1	80	19.01	19.05	19.03	0
		1	158	19.01	19.09	19.02	0
		80	0	18.02	18.04	18.02	1
		80	40	19.01	19.03	19.07	0
		80	80	18.02	18.02	18.02	1
		160	0	18.01	18.06	18.03	1
30M	DFT-S 16QAM	1	1	18.05	18.01	18.01	1
30M	DFT-S 64QAM	1	1	16.56	16.55	16.55	2.5
30M	DFT-S 256QAM	1	1	14.52	14.51	14.53	4.5
30M	CP QPSK	1	1	17.54	17.57	17.55	1.5

NR Conducted Power_ENDC_SA

NR Band 66

BW	MCS Index	Channel		344500	349000	353500	3GPP MPR
		Frequency (MHz)		1722.5	1745	1767.5	
25M	DFT-S PI/2 BPSK	1	1	19.02	19.14	19.11	0
25M	DFT-S QPSK	1	1	19.06	19.14	19.08	0
		1	67	19.05	19.03	19.02	0
		1	131	19.03	19.08	19.01	0
		64	0	18.02	18.03	18.03	1
		64	35	19.02	19.13	19.10	0
		64	69	18.02	18.02	18.03	1
		128	0	18.04	18.02	18.02	1
25M	DFT-S 16QAM	1	1	18.05	18.03	18.06	1
25M	DFT-S 64QAM	1	1	16.50	16.54	16.59	2.5
25M	DFT-S 256QAM	1	1	14.51	14.52	14.52	4.5
25M	CP QPSK	1	1	17.53	17.53	17.58	1.5
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	19.06	19.06	19.02	0
20M	DFT-S QPSK	1	1	19.05	19.13	19.04	0
		1	53	19.02	19.07	19.07	0
		1	104	19.01	19.04	19.03	0
		50	0	18.02	18.03	18.02	1
		50	28	19.02	19.10	19.01	0
		50	56	18.03	18.05	18.02	1
		100	0	18.01	18.06	18.04	1
20M	DFT-S 16QAM	1	1	18.05	18.01	18.02	1
20M	DFT-S 64QAM	1	1	16.54	16.63	16.54	2.5
20M	DFT-S 256QAM	1	1	14.53	14.51	14.52	4.5
20M	CP QPSK	1	1	17.52	17.52	17.54	1.5

NR Conducted Power_ENDC_SA

NR Band 66

BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	19.02	19.12	19.07	0
15M	DFT-S QPSK	1	1	19.02	19.10	19.05	0
		1	40	19.03	19.08	19.06	0
		1	77	19.01	19.04	19.01	0
		36	0	18.01	18.05	18.02	1
		36	22	19.01	19.05	19.10	0
		36	43	18.06	18.01	18.02	1
		75	0	18.05	18.04	18.06	1
15M	DFT-S 16QAM	1	1	18.02	18.04	18.03	1
15M	DFT-S 64QAM	1	1	16.51	16.62	16.59	2.5
15M	DFT-S 256QAM	1	1	14.51	14.53	14.52	4.5
15M	CP QPSK	1	1	17.52	17.57	17.53	1.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	19.02	19.11	19.11	0
10M	DFT-S QPSK	1	1	19.03	19.13	19.10	0
		1	26	19.01	19.09	19.05	0
		1	50	19.02	19.06	19.04	0
		25	0	18.02	18.04	18.05	1
		25	14	19.05	19.06	19.05	0
		25	27	18.03	18.06	18.02	1
		50	0	18.07	18.03	18.02	1
10M	DFT-S 16QAM	1	1	18.01	18.02	18.02	1
10M	DFT-S 64QAM	1	1	16.53	16.63	16.51	2.5
10M	DFT-S 256QAM	1	1	14.51	14.52	14.53	4.5
10M	CP QPSK	1	1	17.51	17.57	17.58	1.5

NR Conducted Power_ENDC_SA

NR Band 66

BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	19.03	19.07	19.04	0
5M	DFT-S QPSK	1	1	19.05	19.06	19.05	0
		1	13	19.02	19.07	19.02	0
		1	23	19.03	19.07	19.01	0
		12	0	18.05	18.02	18.03	1
		12	7	19.04	19.06	19.01	0
		12	13	18.06	18.04	18.02	1
		25	0	18.01	18.02	18.01	1
5M	DFT-S 16QAM	1	1	19.02	18.02	18.01	1
5M	DFT-S 64QAM	1	1	16.52	16.58	16.58	2.5
5M	DFT-S 256QAM	1	1	14.52	14.53	14.52	4.5
5M	CP QPSK	1	1	17.53	17.56	17.54	1.5

NR Conducted Power_ENDC_SA

NR Band 71

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		134600	136100	137600	
		Frequency (MHz)		673	680.5	688	
20M	DFT-S PI/2 BPSK	1	1	20.13	20.10	20.19	0
20M	DFT-S QPSK	1	1	20.18	20.15	20.24	0
		1	53	20.12	20.09	20.18	0
		1	104	20.09	20.06	20.15	0
		50	0	19.12	19.09	19.18	1
		50	28	20.15	20.12	20.21	0
		50	56	19.08	19.05	19.14	1
		100	0	19.13	19.10	19.19	1
20M	DFT-S 16QAM	1	1	19.06	19.03	19.12	1
20M	DFT-S 64QAM	1	1	17.83	17.80	17.89	2.5
20M	DFT-S 256QAM	1	1	15.78	15.75	15.84	4.5
20M	CP QPSK	1	1	18.66	18.63	18.72	1.5
BW	MCS Index	Channel		134100	136100	138100	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	DFT-S PI/2 BPSK	1	1	20.11	20.02	20.09	0
15M	DFT-S QPSK	1	1	20.18	20.05	20.18	0
		1	40	20.02	19.99	20.10	0
		1	77	20.00	20.03	20.13	0
		36	0	19.09	19.01	19.17	1
		36	22	20.14	20.06	20.12	0
		36	43	19.05	18.99	19.14	1
		75	0	19.09	19.07	19.09	1
15M	DFT-S 16QAM	1	1	18.99	18.93	19.08	1
15M	DFT-S 64QAM	1	1	17.80	17.77	17.87	2.5
15M	DFT-S 256QAM	1	1	15.75	15.73	15.79	4.5
15M	CP QPSK	1	1	18.61	18.62	18.68	1.5

NR Conducted Power_ENDC_SA

NR Band 71

BW	MCS Index	Channel		133600	136100	138600	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	DFT-S PI/2 BPSK	1	1	20.12	20.04	20.19	0
10M	DFT-S QPSK	1	1	20.09	20.13	20.22	0
		1	26	20.07	20.04	20.10	0
		1	50	20.00	19.98	20.06	0
		25	0	19.09	19.01	19.15	1
		25	14	20.09	20.03	20.14	0
		25	27	19.03	18.98	19.11	1
		50	0	19.07	19.09	19.13	1
10M	DFT-S 16QAM	1	1	19.05	19.03	19.04	1
10M	DFT-S 64QAM	1	1	17.81	17.73	17.82	2.5
10M	DFT-S 256QAM	1	1	15.73	15.72	15.79	4.5
10M	CP QPSK	1	1	18.56	18.61	18.68	1.5
BW	MCS Index	Channel		133100	136100	139100	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	DFT-S PI/2 BPSK	1	1	20.10	20.07	20.16	0
5M	DFT-S QPSK	1	1	20.18	20.14	20.15	0
		1	13	20.06	20.03	20.14	0
		1	23	20.07	20.01	20.07	0
		12	0	19.05	19.06	19.13	1
		12	7	20.09	20.03	20.12	0
		12	13	19.02	19.01	19.04	1
		25	0	19.11	19.05	19.11	1
5M	DFT-S 16QAM	1	1	19.03	19.03	19.12	1
5M	DFT-S 64QAM	1	1	17.82	17.78	17.89	2.5
5M	DFT-S 256QAM	1	1	15.73	15.66	15.76	4.5
5M	CP QPSK	1	1	18.58	18.58	18.65	1.5

NR Conducted Power_ENDC_SA

NR Band 38

BW	MCS Index	Channel		516000	519000	522000	3GPP MPR
		Frequency (MHz)		2580	2595	2610	
20M	DFT-S PI/2 BPSK	1	1	19.61	19.53	19.55	0
20M	DFT-S QPSK	1	1	19.63	19.55	19.57	0
		1	26	19.57	19.52	19.53	0
		1	49	19.55	19.51	19.52	0
		25	0	18.55	18.52	18.54	1
		25	13	19.58	19.51	19.52	0
		25	26	18.54	18.51	18.53	1
		50	0	18.56	18.52	18.51	1
20M	DFT-S 16QAM	1	1	18.52	18.52	18.51	1
20M	DFT-S 64QAM	1	1	17.04	17.03	17.02	2.5
20M	DFT-S 256QAM	1	1	15.06	15.02	15.01	4.5
20M	CP QPSK	1	1	18.03	18.01	18.02	1.5
BW	MCS Index	Channel		515500	519000	522500	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	DFT-S PI/2 BPSK	1	1	19.55	19.51	19.51	0
15M	DFT-S QPSK	1	1	19.55	19.53	19.52	0
		1	19	19.52	19.51	19.54	0
		1	36	19.51	19.54	19.52	0
		18	0	18.52	18.53	18.54	1
		18	10	19.52	19.51	19.52	0
		18	20	18.53	18.51	18.55	1
		36	0	18.55	18.56	18.55	1
15M	DFT-S 16QAM	1	1	18.51	18.53	18.54	1
15M	DFT-S 64QAM	1	1	17.01	17.02	17.03	2.5
15M	DFT-S 256QAM	1	1	15.01	15.02	15.01	4.5
15M	CP QPSK	1	1	18.03	18.02	18.01	1.5

NR Conducted Power_ENDC_SA

NR Band 38

BW	MCS Index	Channel		515000	519000	523000	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	DFT-S PI/2 BPSK	1	1	19.56	19.52	19.53	0
10M	DFT-S QPSK	1	1	19.62	19.51	19.51	0
		1	11	19.52	19.53	19.50	0
		1	22	19.51	19.53	19.51	0
		12	0	18.52	18.53	18.53	1
		12	6	19.51	19.54	19.51	0
		12	12	18.51	18.53	18.54	1
		24	0	18.56	18.52	18.54	1
10M	DFT-S 16QAM	1	1	18.55	18.52	18.52	1
10M	DFT-S 64QAM	1	1	17.02	17.02	17.03	2.5
10M	DFT-S 256QAM	1	1	15.02	15.06	15.02	4.5
10M	CP QPSK	1	1	18.02	18.01	18.01	1.5

NR Conducted Power_ENDC_SA

NR Band 41

BW	MCS Index	Channel		507204	509304	518598	500298	529998	3GPP MPR
		Frequency (MHz)		2536.02	2546.52	2592.99	2621.49	2649.99	
80M	DFT-S PI/2 BPSK	1	1	22.03	22.12	22.10	22.07	22.02	0
80M	DFT-S QPSK	1	1	22.04	22.14	22.12	22.09	22.04	0
		1	109	22.02	22.08	22.06	22.03	22.01	0
		1	215	22.01	22.05	22.03	22.02	22.03	0
		108	0	21.02	21.06	21.05	21.03	21.02	1
		108	55	22.01	22.09	22.07	22.04	22.02	0
		108	109	21.02	21.04	21.02	21.03	21.02	1
		216	0	21.03	21.07	21.05	21.02	21.03	1
80M	DFT-S 16QAM	1	1	21.01	21.02	21.02	21.03	21.02	1
80M	DFT-S 64QAM	1	1	19.53	19.53	19.51	19.57	19.53	2.5
80M	DFT-S 256QAM	1	1	17.52	17.56	17.54	17.51	17.52	4.5
80M	CP QPSK	1	1	20.53	20.57	20.55	20.54	20.56	1.5
BW	MCS Index	Channel		506202	512400	518598	524802	531000	3GPP MPR
		Frequency (MHz)		2531.01	2562	2592.99	2624.01	2655	
70M	DFT-S PI/2 BPSK	1	1	22.02	22.12	22.01	22.03	22.04	0
70M	DFT-S QPSK	1	1	22.03	22.10	22.03	22.05	22.02	0
		1	95	22.03	22.08	22.03	22.01	22.01	0
		1	187	22.03	22.01	22.04	22.06	22.04	0
		90	0	21.03	21.02	21.04	21.02	21.03	1
		90	50	22.06	22.02	22.02	22.04	22.01	0
		90	99	21.03	21.05	21.02	21.06	21.01	1
		180	0	21.03	21.02	21.04	21.02	21.03	1
70M	DFT-S 16QAM	1	1	21.02	21.05	21.02	21.01	21.03	1
70M	DFT-S 64QAM	1	1	19.52	19.56	19.54	19.52	19.53	2.5
70M	DFT-S 256QAM	1	1	17.53	17.52	17.54	17.51	17.51	4.5
70M	CP QPSK	1	1	20.53	20.52	20.51	20.52	20.53	1.5

NR Conducted Power_ENDC_SA

NR Band 41

BW	MCS Index	Channel		505200	511896	518598	525294	531996	3GPP MPR
		Frequency (MHz)		2526	2559.48	2592.99	2626.48	2659.98	
60M	DFT-S PI/2 BPSK	1	1	22.02	22.04	22.09	22.03	22.04	0
60M	DFT-S QPSK	1	1	22.03	22.04	22.02	22.01	22.02	0
		1	81	22.05	22.06	22.01	22.02	22.01	0
		1	160	22.02	22.03	22.04	22.01	22.02	0
		81	0	21.02	21.02	21.03	21.01	21.06	1
		81	41	22.03	22.05	22.03	22.02	22.02	0
		81	81	21.02	21.03	21.01	21.03	21.02	1
		162	0	21.01	21.03	21.02	21.01	21.03	1
60M	DFT-S 16QAM	1	1	21.03	21.03	21.05	21.05	21.01	1
60M	DFT-S 64QAM	1	1	19.53	19.51	19.54	19.53	19.52	2.5
60M	DFT-S 256QAM	1	1	17.56	17.52	17.54	17.53	17.52	4.5
60M	CP QPSK	1	1	20.53	20.55	20.54	20.51	20.56	1.5
BW	MCS Index	Channel		504204	511404	518598	525798	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.02	2592.99	2628.99	2664.99	
50M	DFT-S PI/2 BPSK	1	1	22.01	22.05	22.07	22.06	22.02	0
50M	DFT-S QPSK	1	1	22.03	22.08	22.09	22.05	22.03	0
		1	67	22.04	22.02	22.03	22.03	22.02	0
		1	131	22.03	22.05	22.04	22.01	22.04	0
		64	0	21.02	21.01	21.03	21.04	21.02	1
		64	35	22.01	22.07	22.03	22.01	22.03	0
		64	69	21.02	21.03	21.05	21.02	21.03	1
		128	0	21.03	21.06	21.02	21.02	21.04	1
50M	DFT-S 16QAM	1	1	21.02	21.05	21.01	21.03	21.02	1
50M	DFT-S 64QAM	1	1	19.53	19.52	19.51	19.57	19.52	2.5
50M	DFT-S 256QAM	1	1	17.56	17.53	17.52	17.51	17.57	4.5
50M	CP QPSK	1	1	20.52	20.56	20.51	20.54	20.51	1.5

NR Conducted Power_ENDC_SA

NR Band 41

BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	22.01	22.11	22.08	22.01	22.01	0
40M	DFT-S QPSK	1	1	22.03	22.09	22.07	22.05	22.01	0
		1	53	22.02	22.03	22.04	22.01	22.02	0
		1	104	22.01	22.06	22.05	22.04	22.03	0
		50	0	21.01	21.05	21.03	21.02	21.03	1
		50	28	22.01	22.03	22.01	22.02	22.04	0
		50	56	21.03	21.02	21.05	21.01	21.01	1
		100	0	21.01	21.03	21.02	21.04	21.01	1
40M	DFT-S 16QAM	1	1	21.03	21.05	21.01	21.02	21.06	1
40M	DFT-S 64QAM	1	1	19.53	19.53	19.51	19.52	19.53	2.5
40M	DFT-S 256QAM	1	1	17.56	17.52	17.54	17.51	17.52	4.5
40M	CP QPSK	1	1	20.53	20.54	20.54	20.51	20.56	1.5
BW	MCS Index	Channel		502200	510396	518598	526794	534996	3GPP MPR
		Frequency (MHz)		2511	2551.98	2592.99	2633.97	2674.98	
30M	DFT-S PI/2 BPSK	1	1	22.04	22.12	22.02	22.03	22.04	0
30M	DFT-S QPSK	1	1	22.03	22.04	22.08	22.07	22.02	0
		1	39	22.02	22.08	22.01	22.01	22.01	0
		1	76	22.03	22.03	22.02	22.04	22.01	0
		36	0	21.02	21.02	21.03	21.04	21.05	1
		36	21	22.06	22.04	22.01	22.02	22.03	0
		36	42	21.01	21.03	21.02	21.02	21.05	1
		75	0	21.01	21.02	21.03	21.01	21.02	1
30M	DFT-S 16QAM	1	1	21.04	21.05	21.02	21.04	21.05	1
30M	DFT-S 64QAM	1	1	19.53	19.54	19.52	19.51	19.54	2.5
30M	DFT-S 256QAM	1	1	17.52	17.56	17.53	17.54	17.51	4.5
30M	CP QPSK	1	1	20.53	20.51	20.51	20.52	20.51	1.5

NR Conducted Power_ENDC_SA

NR Band 41

BW	MCS Index	Channel		501204	509898	518598	527298	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.49	2592.99	2636.49	2679.99	
20M	DFT-S PI/2 BPSK	1	1	22.02	22.05	22.06	22.03	22.03	0
20M	DFT-S QPSK	1	1	22.03	22.13	22.08	22.03	22.02	0
		1	26	22.04	22.06	22.05	22.03	22.03	0
		1	49	22.01	22.04	22.02	22.03	22.01	0
		25	0	21.03	21.03	21.05	21.03	21.02	1
		25	13	22.03	22.04	22.02	22.04	22.02	0
		25	26	21.01	21.02	21.02	21.01	21.03	1
		50	0	21.02	21.01	21.03	21.04	21.02	1
20M	DFT-S 16QAM	1	1	21.03	21.02	21.04	21.02	21.01	1
20M	DFT-S 64QAM	1	1	19.52	19.52	19.53	19.55	19.51	2.5
20M	DFT-S 256QAM	1	1	17.52	17.51	17.51	17.53	17.54	4.5
20M	CP QPSK	1	1	20.52	20.51	20.51	20.52	20.53	1.5
BW	MCS Index	Channel		500700	509646	518598	527544	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.23	2592.99	2637.72	2682.48	
15M	DFT-S PI/2 BPSK	1	1	22.03	22.08	22.03	22.05	22.02	0
15M	DFT-S QPSK	1	1	22.03	22.13	22.05	22.03	22.02	0
		1	19	22.01	22.08	22.02	22.01	22.03	0
		1	36	22.03	22.01	22.04	22.03	22.01	0
		18	0	21.03	21.04	21.02	21.04	21.02	1
		18	10	22.06	22.03	22.04	22.02	22.03	0
		18	20	21.03	21.04	21.02	21.03	21.02	1
		36	0	21.02	21.04	21.01	21.06	21.02	1
15M	DFT-S 16QAM	1	1	21.02	21.03	21.01	21.05	21.02	1
15M	DFT-S 64QAM	1	1	19.51	19.52	19.52	19.56	19.52	2.5
15M	DFT-S 256QAM	1	1	17.52	17.53	17.52	17.54	17.52	4.5
15M	CP QPSK	1	1	20.51	20.52	20.51	20.52	20.51	1.5

NR Conducted Power_ENDC_SA

NR Band 41

BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	22.03	22.10	22.01	22.02	22.03	0
10M	DFT-S QPSK	1	1	22.03	22.10	22.07	22.05	22.02	0
		1	11	22.03	22.08	22.01	22.02	22.03	0
		1	22	22.01	22.03	22.01	22.04	22.01	0
		12	0	21.03	21.01	21.02	21.05	21.02	1
		12	6	22.03	22.05	22.06	22.04	22.02	0
		12	12	21.02	21.03	21.01	21.02	21.03	1
		24	0	21.06	21.01	21.05	21.02	21.02	1
10M	DFT-S 16QAM	1	1	21.01	21.05	21.02	21.01	21.03	1
10M	DFT-S 64QAM	1	1	19.52	19.52	19.53	19.53	19.56	2.5
10M	DFT-S 256QAM	1	1	17.52	17.54	17.53	17.51	17.51	4.5
10M	CP QPSK	1	1	20.51	20.52	20.52	20.53	20.52	1.5

NR Conducted Power_ENDC_SA

NR Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		640000	641110	642222	643332	
		Frequency (MHz)		3600	3616.65	3633.33	3649.98	
100M	DFT-S PI/2 BPSK	1	1	18.47	18.53	18.40	18.50	0
100M	DFT-S QPSK	1	1	18.49	18.55	18.42	18.52	0
		1	137	18.43	18.49	18.36	18.46	0
		1	271	18.41	18.47	18.34	18.44	0
		135	0	17.55	17.61	17.48	17.58	1
		135	69	18.46	18.52	18.39	18.49	0
		135	138	17.58	17.64	17.51	17.61	1
		270	0	17.60	17.66	17.53	17.63	1
100M	DFT-S 16QAM	1	1	17.53	17.59	17.46	17.56	1
100M	DFT-S 64QAM	1	1	15.91	15.97	15.84	15.94	2.5
100M	DFT-S 256QAM	1	1	13.98	14.04	13.91	14.01	4.5
100M	CP QPSK	1	1	16.86	16.92	16.79	16.89	1.5
BW	MCS Index	Channel		639668	641000	642332	643666	3GPP MPR
		Frequency (MHz)		3595.02	3615	3634.98	3654.99	
90M	DFT-S PI/2 BPSK	1	1	18.46	18.43	18.31	18.45	0
90M	DFT-S QPSK	1	1	18.46	18.48	18.33	18.44	0
		1	123	18.41	18.39	18.30	18.37	0
		1	243	18.36	18.39	18.30	18.37	0
		120	0	17.55	17.57	17.45	17.58	1
		120	63	18.41	18.52	18.36	18.39	0
		120	125	17.49	17.63	17.51	17.58	1
		243	0	17.54	17.57	17.50	17.56	1
90M	DFT-S 16QAM	1	1	17.48	17.50	17.46	17.53	1
90M	DFT-S 64QAM	1	1	15.81	15.95	15.78	15.94	2.5
90M	DFT-S 256QAM	1	1	13.97	13.97	13.85	13.99	4.5
90M	CP QPSK	1	1	16.80	16.83	16.73	16.87	1.5

NR Conducted Power_ENDC_SA

NR Band 48

BW	MCS Index	Channel		639334	640888	642444	644000	3GPP MPR
		Frequency (MHz)		3590.01	3613.32	3636.66	3660	
80M	DFT-S PI/2 BPSK	1	1	18.44	18.48	18.40	18.42	0
80M	DFT-S QPSK	1	1	18.44	18.47	18.33	18.45	0
		1	109	18.38	18.45	18.27	18.46	0
		1	215	18.38	18.43	18.24	18.42	0
		108	0	17.55	17.59	17.38	17.58	1
		108	55	18.38	18.46	18.37	18.49	0
		108	109	17.51	17.62	17.42	17.51	1
		216	0	17.58	17.59	17.46	17.56	1
80M	DFT-S 16QAM	1	1	17.50	17.52	17.41	17.56	1
80M	DFT-S 64QAM	1	1	15.82	15.89	15.76	15.90	2.5
80M	DFT-S 256QAM	1	1	13.89	13.99	13.86	14.01	4.5
80M	CP QPSK	1	1	16.86	16.86	16.77	16.88	1.5
BW	MCS Index	Channel		639000	640778	642548	644332	3GPP MPR
		Frequency (MHz)		3585	3611.67	3638.22	3664.98	
70M	DFT-S PI/2 BPSK	1	1	18.44	18.53	18.37	18.40	0
70M	DFT-S QPSK	1	1	18.40	18.45	18.38	18.48	0
		1	95	18.43	18.46	18.30	18.46	0
		1	187	18.41	18.37	18.31	18.37	0
		90	0	17.47	17.58	17.39	17.58	1
		90	50	18.42	18.50	18.31	18.48	0
		90	99	17.48	17.58	17.47	17.56	1
		180	0	17.54	17.58	17.53	17.57	1
70M	DFT-S 16QAM	1	1	17.47	17.49	17.38	17.50	1
70M	DFT-S 64QAM	1	1	15.82	15.89	15.84	15.91	2.5
70M	DFT-S 256QAM	1	1	13.89	13.98	13.89	13.92	4.5
70M	CP QPSK	1	1	16.81	16.84	16.74	16.81	1.5

NR Conducted Power_ENDC_SA

NR Band 48

BW	MCS Index	Channel		638668	640666	642666	644666	3GPP MPR
		Frequency (MHz)		3580.02	3609.99	3639.99	3669.99	
60M	DFT-S PI/2 BPSK	1	1	18.39	18.48	18.33	18.49	0
60M	DFT-S QPSK	1	1	18.45	18.47	18.39	18.48	0
		1	81	18.36	18.43	18.29	18.42	0
		1	160	18.32	18.37	18.27	18.40	0
		81	0	17.47	17.57	17.38	17.57	1
		81	41	18.38	18.43	18.35	18.40	0
		81	81	17.56	17.57	17.51	17.56	1
		162	0	17.59	17.60	17.49	17.56	1
60M	DFT-S 16QAM	1	1	17.47	17.55	17.40	17.46	1
60M	DFT-S 64QAM	1	1	15.91	15.96	15.74	15.92	2.5
60M	DFT-S 256QAM	1	1	13.97	14.02	13.86	13.95	4.5
60M	CP QPSK	1	1	16.80	16.91	16.74	16.84	1.5
BW	MCS Index	Channel		638334	640556	642778	645000	3GPP MPR
		Frequency (MHz)		3575.01	3608.34	3641.67	3675	
50M	DFT-S PI/2 BPSK	1	1	18.37	18.47	18.37	18.41	0
50M	DFT-S QPSK	1	1	18.45	18.50	18.34	18.45	0
		1	67	18.42	18.46	18.32	18.38	0
		1	131	18.37	18.46	18.31	18.34	0
		64	0	17.45	17.56	17.40	17.54	1
		64	35	18.36	18.50	18.31	18.46	0
		64	69	17.51	17.56	17.47	17.60	1
		128	0	17.55	17.62	17.47	17.54	1
50M	DFT-S 16QAM	1	1	17.45	17.49	17.39	17.55	1
50M	DFT-S 64QAM	1	1	15.87	15.88	15.84	15.89	2.5
50M	DFT-S 256QAM	1	1	13.93	13.97	13.86	14.01	4.5
50M	CP QPSK	1	1	16.80	16.85	16.70	16.82	1.5

NR Conducted Power_ENDC_SA

NR Band 48

BW	MCS Index	Channel		638000	640444	642888	645332	3GPP MPR
		Frequency (MHz)		3570	3606.66	3643.32	3679.98	
40M	DFT-S PI/2 BPSK	1	1	18.40	18.45	18.39	18.43	0
40M	DFT-S QPSK	1	1	18.45	18.47	18.33	18.52	0
		1	53	18.36	18.48	18.29	18.44	0
		1	104	18.34	18.37	18.33	18.34	0
		50	0	17.50	17.58	17.41	17.58	1
		50	28	18.41	18.43	18.34	18.48	0
		50	56	17.53	17.59	17.43	17.55	1
		100	0	17.55	17.65	17.44	17.59	1
40M	DFT-S 16QAM	1	1	17.43	17.53	17.44	17.55	1
40M	DFT-S 64QAM	1	1	15.90	15.90	15.74	15.92	2.5
40M	DFT-S 256QAM	1	1	13.93	14.02	13.82	13.96	4.5
40M	CP QPSK	1	1	16.86	16.90	16.77	16.80	1.5
BW	MCS Index	Channel		637334	640222	643110	646000	3GPP MPR
		Frequency (MHz)		3560.01	3603.33	3646.65	3690	
20M	DFT-S PI/2 BPSK	1	1	18.43	18.53	18.33	18.47	0
20M	DFT-S QPSK	1	1	18.43	18.54	18.36	18.45	0
		1	26	18.37	18.45	18.30	18.41	0
		1	49	18.33	18.41	18.27	18.36	0
		25	0	17.52	17.52	17.42	17.56	1
		25	13	18.45	18.42	18.29	18.39	0
		25	26	17.58	17.62	17.48	17.52	1
		50	0	17.59	17.66	17.50	17.62	1
20M	DFT-S 16QAM	1	1	17.53	17.52	17.42	17.49	1
20M	DFT-S 64QAM	1	1	15.88	15.90	15.83	15.90	2.5
20M	DFT-S 256QAM	1	1	13.94	13.97	13.84	13.94	4.5
20M	CP QPSK	1	1	16.84	16.92	16.71	16.83	1.5

NR Conducted Power_ENDC_SA

NR Band 48

BW	MCS Index	Channel		637168	640168	643166	646166	3GPP MPR
		Frequency (MHz)		3557.52	3602.52	3647.49	3692.49	
15M	DFT-S PI/2 BPSK	1	1	18.43	18.44	18.38	18.46	0
15M	DFT-S QPSK	1	1	18.49	18.48	18.34	18.45	0
		1	19	18.38	18.46	18.32	18.45	0
		1	36	18.41	18.40	18.26	18.34	0
		18	0	17.48	17.56	17.41	17.55	1
		18	10	18.43	18.51	18.34	18.42	0
		18	20	17.50	17.59	17.46	17.55	1
		36	0	17.50	17.59	17.44	17.61	1
15M	DFT-S 16QAM	1	1	17.47	17.50	17.38	17.52	1
15M	DFT-S 64QAM	1	1	15.89	15.88	15.80	15.92	2.5
15M	DFT-S 256QAM	1	1	13.90	14.01	13.87	13.93	4.5
15M	CP QPSK	1	1	16.84	16.90	16.74	16.85	1.5
BW	MCS Index	Channel		637000	640110	643222	646332	3GPP MPR
		Frequency (MHz)		3555	3601.65	3648.33	3694.98	
10M	DFT-S PI/2 BPSK	1	1	18.45	18.50	18.39	18.50	0
10M	DFT-S QPSK	1	1	18.43	18.45	18.34	18.48	0
		1	11	18.39	18.49	18.28	18.41	0
		1	22	18.34	18.41	18.28	18.42	0
		12	0	17.51	17.53	17.38	17.48	1
		12	6	18.42	18.44	18.38	18.48	0
		12	12	17.50	17.62	17.48	17.57	1
		24	0	17.55	17.58	17.45	17.62	1
10M	DFT-S 16QAM	1	1	17.50	17.57	17.37	17.53	1
10M	DFT-S 64QAM	1	1	15.88	15.87	15.79	15.93	2.5
10M	DFT-S 256QAM	1	1	13.89	13.98	13.91	13.93	4.5
10M	CP QPSK	1	1	16.76	16.92	16.78	16.84	1.5

NR Conducted Power_ENDC_SA

NR Band 77

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	22.83	22.64	22.85	22.82	23.02	0
100M	DFT-S QPSK	1	1	22.86	22.67	22.88	22.85	23.05	0
		1	137	22.80	22.61	22.82	22.79	22.99	0
		1	271	22.79	22.60	22.81	22.78	22.98	0
		135	0	21.85	21.66	21.87	21.84	22.04	1
		135	69	22.84	22.65	22.86	22.83	23.03	0
		135	138	21.83	21.64	21.85	21.82	22.02	1
		270	0	21.86	21.67	21.88	21.85	22.05	1
100M	DFT-S 16QAM	1	1	21.80	21.61	21.82	21.79	21.99	1
100M	DFT-S 64QAM	1	1	20.34	20.15	20.36	20.33	20.53	2.5
100M	DFT-S 256QAM	1	1	18.35	18.16	18.37	18.34	18.54	4.5
100M	CP QPSK	1	1	21.39	21.20	21.41	21.38	21.58	1.5
BW	MCS Index	Channel		649668	652834	656000	659166	662332	3GPP MPR
		Frequency (MHz)		3745.02	3792.51	3840	3887.49	3934.98	
90M	DFT-S PI/2 BPSK	1	1	22.75	22.62	22.76	22.82	23.02	0
90M	DFT-S QPSK	1	1	22.85	22.61	22.86	22.78	22.99	0
		1	123	22.73	22.58	22.72	22.77	22.99	0
		1	243	22.74	22.55	22.80	22.78	22.98	0
		120	0	21.80	21.62	21.84	21.81	22.00	1
		120	63	22.78	22.55	22.81	22.79	23.01	0
		120	125	21.73	21.64	21.75	21.76	22.01	1
		243	0	21.80	21.65	21.82	21.76	22.02	1
90M	DFT-S 16QAM	1	1	21.76	21.61	21.77	21.78	21.99	1
90M	DFT-S 64QAM	1	1	20.24	20.08	20.34	20.28	20.53	2.5
90M	DFT-S 256QAM	1	1	18.28	18.12	18.36	18.25	18.52	4.5
90M	CP QPSK	1	1	21.30	21.11	21.34	21.29	21.55	1.5

NR Conducted Power_ENDC_SA

NR Band 77

BW	MCS Index	Channel		649334	652666	656000	659334	662666	3GPP MPR
		Frequency (MHz)		3740.01	3789.99	3840	3890.01	3939.99	
80M	DFT-S PI/2 BPSK	1	1	22.79	22.58	22.80	22.74	22.95	0
80M	DFT-S QPSK	1	1	22.80	22.57	22.85	22.81	22.99	0
		1	109	22.77	22.60	22.78	22.69	22.99	0
		1	215	22.73	22.53	22.71	22.78	22.89	0
		108	0	21.82	21.59	21.78	21.78	21.97	1
		108	55	22.79	22.58	22.80	22.79	22.95	0
		108	109	21.75	21.59	21.75	21.74	22.02	1
		216	0	21.86	21.64	21.83	21.85	21.95	1
80M	DFT-S 16QAM	1	1	21.80	21.52	21.82	21.71	21.92	1
80M	DFT-S 64QAM	1	1	20.30	20.11	20.28	20.33	20.45	2.5
80M	DFT-S 256QAM	1	1	18.26	18.15	18.30	18.27	18.47	4.5
80M	CP QPSK	1	1	21.30	21.10	21.36	21.29	21.49	1.5
BW	MCS Index	Channel		649000	652500	656000	659500	663000	3GPP MPR
		Frequency (MHz)		3735	3787.5	3840	3892.5	3945	
70M	DFT-S PI/2 BPSK	1	1	22.78	22.63	22.85	22.79	23.02	0
70M	DFT-S QPSK	1	1	22.77	22.61	22.88	22.83	23.02	0
		1	95	22.71	22.52	22.80	22.71	22.91	0
		1	187	22.72	22.54	22.79	22.70	22.91	0
		90	0	21.76	21.58	21.79	21.77	22.00	1
		90	50	22.77	22.64	22.83	22.82	23.03	0
		90	99	21.73	21.54	21.78	21.79	22.00	1
		180	0	21.77	21.62	21.84	21.75	22.00	1
70M	DFT-S 16QAM	1	1	21.78	21.56	21.77	21.73	21.92	1
70M	DFT-S 64QAM	1	1	20.33	20.06	20.35	20.30	20.49	2.5
70M	DFT-S 256QAM	1	1	18.30	18.08	18.37	18.30	18.51	4.5
70M	CP QPSK	1	1	21.31	21.17	21.33	21.31	21.58	1.5

NR Conducted Power_ENDC_SA

NR Band 77

BW	MCS Index	Channel		648668	652334	656000	659666	663332	3GPP MPR
		Frequency (MHz)		3730.02	3785.01	3840	3894.99	3949.98	
60M	DFT-S PI/2 BPSK	1	1	22.76	22.54	22.82	22.77	23.00	0
60M	DFT-S QPSK	1	1	22.81	22.58	22.80	22.77	22.96	0
		1	81	22.72	22.52	22.76	22.79	22.90	0
		1	160	22.69	22.59	22.76	22.71	22.89	0
		81	0	21.77	21.65	21.82	21.84	21.97	1
		81	41	22.80	22.59	22.85	22.76	23.03	0
		81	81	21.74	21.55	21.75	21.77	21.92	1
		162	0	21.83	21.59	21.80	21.84	22.03	1
60M	DFT-S 16QAM	1	1	21.80	21.59	21.82	21.70	21.91	1
60M	DFT-S 64QAM	1	1	20.30	20.10	20.30	20.29	20.47	2.5
60M	DFT-S 256QAM	1	1	18.30	18.12	18.27	18.27	18.50	4.5
60M	CP QPSK	1	1	21.32	21.16	21.38	21.36	21.53	1.5
BW	MCS Index	Channel		648334	652166	656000	659834	663666	3GPP MPR
		Frequency (MHz)		3725.01	3782.49	3840	3897.51	3954.99	
50M	DFT-S PI/2 BPSK	1	1	22.73	22.60	22.83	22.76	22.92	0
50M	DFT-S QPSK	1	1	22.84	22.61	22.87	22.85	23.02	0
		1	67	22.78	22.54	22.79	22.69	22.97	0
		1	131	22.77	22.57	22.73	22.70	22.97	0
		64	0	21.83	21.62	21.80	21.80	21.94	1
		64	35	22.77	22.58	22.82	22.73	23.02	0
		64	69	21.74	21.59	21.81	21.75	21.94	1
		128	0	21.81	21.66	21.81	21.82	22.02	1
50M	DFT-S 16QAM	1	1	21.78	21.61	21.77	21.77	21.97	1
50M	DFT-S 64QAM	1	1	20.25	20.06	20.34	20.31	20.51	2.5
50M	DFT-S 256QAM	1	1	18.28	18.06	18.36	18.24	18.44	4.5
50M	CP QPSK	1	1	21.37	21.15	21.35	21.38	21.56	1.5

NR Conducted Power_ENDC_SA

NR Band 77

BW	MCS Index	Channel		648000	652000	656000	660000	664000	3GPP MPR
		Frequency (MHz)		3720	3780	3840	3900	3960	
40M	DFT-S PI/2 BPSK	1	1	22.81	22.62	22.85	22.82	22.96	0
40M	DFT-S QPSK	1	1	22.78	22.66	22.80	22.83	22.99	0
		1	53	22.74	22.58	22.80	22.75	22.96	0
		1	104	22.71	22.51	22.76	22.76	22.93	0
		50	0	21.84	21.56	21.82	21.78	22.01	1
		50	28	22.80	22.62	22.80	22.76	23.02	0
		50	56	21.82	21.59	21.78	21.72	22.01	1
		100	0	21.78	21.64	21.78	21.81	21.95	1
40M	DFT-S 16QAM	1	1	21.77	21.60	21.76	21.74	21.93	1
40M	DFT-S 64QAM	1	1	20.31	20.10	20.30	20.33	20.45	2.5
40M	DFT-S 256QAM	1	1	18.34	18.14	18.36	18.24	18.44	4.5
40M	CP QPSK	1	1	21.30	21.15	21.39	21.34	21.51	1.5
BW	MCS Index	Channel		647668	651834	656000	660166	664332	3GPP MPR
		Frequency (MHz)		3715.02	3777.51	3840	3902.49	3964.98	
30M	DFT-S PI/2 BPSK	1	1	22.83	22.56	22.83	22.82	22.96	0
30M	DFT-S QPSK	1	1	22.81	22.67	22.88	22.83	23.04	0
		1	39	22.77	22.51	22.74	22.77	22.90	0
		1	76	22.76	22.60	22.77	22.68	22.93	0
		36	0	21.83	21.66	21.80	21.81	21.99	1
		36	21	22.74	22.60	22.79	22.75	22.95	0
		36	42	21.79	21.55	21.75	21.77	22.02	1
		75	0	21.82	21.58	21.79	21.82	21.97	1
30M	DFT-S 16QAM	1	1	21.77	21.60	21.72	21.70	21.98	1
30M	DFT-S 64QAM	1	1	20.32	20.13	20.35	20.23	20.50	2.5
30M	DFT-S 256QAM	1	1	18.35	18.08	18.37	18.26	18.52	4.5
30M	CP QPSK	1	1	21.38	21.20	21.38	21.33	21.51	1.5

NR Conducted Power_ENDC_SA

NR Band 77

BW	MCS Index	Channel		647500	651750	656000	660250	664500	3GPP MPR
		Frequency (MHz)		3712.5	3776.25	3840	3903.75	3967.5	
25M	DFT-S PI/2 BPSK	1	1	22.74	22.56	22.85	22.78	22.98	0
25M	DFT-S QPSK	1	1	22.85	22.59	22.84	22.84	23.01	0
		1	33	22.79	22.58	22.79	22.70	22.91	0
		1	63	22.71	22.51	22.77	22.71	22.94	0
		32	0	21.81	21.56	21.85	21.83	22.02	1
		32	17	22.77	22.61	22.80	22.77	22.98	0
		32	33	21.83	21.61	21.81	21.81	21.94	1
		64	0	21.77	21.58	21.88	21.84	22.03	1
25M	DFT-S 16QAM	1	1	21.80	21.52	21.72	21.77	21.89	1
25M	DFT-S 64QAM	1	1	20.30	20.06	20.34	20.30	20.44	2.5
25M	DFT-S 256QAM	1	1	18.31	18.09	18.36	18.30	18.47	4.5
25M	CP QPSK	1	1	21.38	21.14	21.31	21.30	21.49	1.5
BW	MCS Index	Channel		647334	651666	656000	660266	664666	3GPP MPR
		Frequency (MHz)		3710.01	3774.99	3840	3903.99	3969.99	
20M	DFT-S PI/2 BPSK	1	1	22.76	22.57	22.77	22.77	22.93	0
20M	DFT-S QPSK	1	1	22.79	22.59	22.79	22.83	22.98	0
		1	26	22.77	22.58	22.78	22.73	22.91	0
		1	49	22.73	22.58	22.73	22.71	22.93	0
		25	0	21.78	21.62	21.77	21.75	22.01	1
		25	13	22.76	22.58	22.78	22.77	22.97	0
		25	26	21.81	21.56	21.77	21.73	22.00	1
		50	0	21.81	21.60	21.84	21.84	22.04	1
20M	DFT-S 16QAM	1	1	21.75	21.53	21.72	21.72	21.92	1
20M	DFT-S 64QAM	1	1	20.27	20.11	20.27	20.25	20.45	2.5
20M	DFT-S 256QAM	1	1	18.28	18.15	18.32	18.27	18.47	4.5
20M	CP QPSK	1	1	21.30	21.20	21.31	21.35	21.55	1.5

NR Conducted Power_ENDC_SA

NR Band 77

BW	MCS Index	Channel		647168	651584	656000	660416	664832	3GPP MPR
		Frequency (MHz)		3707.52	3773.76	3840	3906.24	3972.48	
15M	DFT-S PI/2 BPSK	1	1	22.76	22.56	22.80	22.76	22.99	0
15M	DFT-S QPSK	1	1	22.79	22.57	22.82	22.75	22.97	0
		1	19	22.73	22.53	22.75	22.70	22.93	0
		1	36	22.74	22.55	22.77	22.70	22.89	0
		18	0	21.84	21.57	21.79	21.81	22.02	1
		18	10	22.79	22.64	22.86	22.81	22.97	0
		18	20	21.73	21.61	21.79	21.74	21.96	1
		36	0	21.83	21.62	21.80	21.84	21.99	1
15M	DFT-S 16QAM	1	1	21.79	21.58	21.79	21.79	21.97	1
15M	DFT-S 64QAM	1	1	20.31	20.05	20.34	20.26	20.48	2.5
15M	DFT-S 256QAM	1	1	18.28	18.08	18.35	18.25	18.52	4.5
15M	CP QPSK	1	1	21.29	21.18	21.41	21.34	21.51	1.5
BW	MCS Index	Channel		647000	651500	656000	660500	665000	3GPP MPR
		Frequency (MHz)		3705	3772.5	3840	3907.5	3975	
10M	DFT-S PI/2 BPSK	1	1	22.78	22.59	22.81	22.80	22.95	0
10M	DFT-S QPSK	1	1	22.81	22.59	22.88	22.85	22.97	0
		1	11	22.77	22.55	22.77	22.73	22.93	0
		1	22	22.74	22.56	22.79	22.71	22.91	0
		12	0	21.80	21.61	21.83	21.84	22.01	1
		12	6	22.82	22.58	22.83	22.76	22.93	0
		12	12	21.74	21.57	21.80	21.82	21.92	1
		24	0	21.82	21.66	21.85	21.85	22.02	1
10M	DFT-S 16QAM	1	1	21.75	21.54	21.72	21.75	21.95	1
10M	DFT-S 64QAM	1	1	20.29	20.06	20.31	20.23	20.53	2.5
10M	DFT-S 256QAM	1	1	18.30	18.11	18.30	18.34	18.49	4.5
10M	CP QPSK	1	1	21.35	21.11	21.36	21.32	21.49	1.5

NR Conducted Power_ENDC_SA

NR Band 78

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		20.68		0
100M	DFT-S QPSK	1	1		20.72		0
		1	137		20.65		0
		1	271		20.66		0
		135	0		19.68		1
		135	69		20.69		0
		135	138		19.65		1
		270	0		19.69		1
100M	DFT-S 16QAM	1	1		19.62		1
100M	DFT-S 64QAM	1	1		18.19		2.5
100M	DFT-S 256QAM	1	1		16.14		4.5
100M	CP QPSK	1	1		19.25		1.5
BW	MCS Index	Channel		649668	650000	650332	3GPP MPR
		Frequency (MHz)		3745.02	3750	3754.98	
90M	DFT-S PI/2 BPSK	1	1	20.60	20.62	20.65	0
90M	DFT-S QPSK	1	1	20.65	20.68	20.62	0
		1	123	20.55	20.58	20.62	0
		1	243	20.52	20.64	20.60	0
		120	0	19.59	19.58	19.57	1
		120	63	20.57	20.59	20.66	0
		120	125	19.51	19.55	19.53	1
		243	0	19.62	19.69	19.66	1
90M	DFT-S 16QAM	1	1	19.48	19.56	19.52	1
90M	DFT-S 64QAM	1	1	18.13	18.17	18.10	2.5
90M	DFT-S 256QAM	1	1	15.99	16.07	16.11	4.5
90M	CP QPSK	1	1	19.16	19.23	19.13	1.5

NR Conducted Power_ENDC_SA

NR Band 78

BW	MCS Index	Channel		649334	650000	650666	3GPP MPR
		Frequency (MHz)		3740.01	3750	3759.99	
80M	DFT-S PI/2 BPSK	1	1	20.58	20.66	20.60	0
80M	DFT-S QPSK	1	1	20.57	20.71	20.63	0
		1	109	20.50	20.65	20.54	0
		1	215	20.59	20.62	20.63	0
		108	0	19.52	19.66	19.58	1
		108	55	20.57	20.62	20.57	0
		108	109	19.56	19.59	19.61	1
		216	0	19.61	19.62	19.62	1
80M	DFT-S 16QAM	1	1	19.50	19.60	19.56	1
80M	DFT-S 64QAM	1	1	18.06	18.10	18.13	2.5
80M	DFT-S 256QAM	1	1	16.03	16.04	16.07	4.5
80M	CP QPSK	1	1	19.12	19.25	19.18	1.5
BW	MCS Index	Channel		649000	650000	651000	3GPP MPR
		Frequency (MHz)		3735	3750	3765	
70M	DFT-S PI/2 BPSK	1	1	20.59	20.47	20.62	0
70M	DFT-S QPSK	1	1	20.63	20.51	20.60	0
		1	95	20.56	20.44	20.57	0
		1	187	20.52	20.40	20.61	0
		90	0	19.52	19.40	19.58	1
		90	50	20.63	20.51	20.59	0
		90	99	19.56	19.44	19.56	1
		180	0	19.55	19.43	19.56	1
70M	DFT-S 16QAM	1	1	19.55	19.43	19.59	1
70M	DFT-S 64QAM	1	1	18.07	17.95	18.11	2.5
70M	DFT-S 256QAM	1	1	15.99	15.87	16.05	4.5
70M	CP QPSK	1	1	19.10	18.98	19.22	1.5

NR Conducted Power_ENDC_SA

NR Band 78

BW	MCS Index	Channel		648668	650000	651332	3GPP MPR
		Frequency (MHz)		3730.02	3750	3769.98	
60M	DFT-S PI/2 BPSK	1	1	20.61	20.58	20.60	0
60M	DFT-S QPSK	1	1	20.57	20.65	20.67	0
		1	81	20.53	20.61	20.57	0
		1	160	20.56	20.65	20.59	0
		81	0	19.54	19.66	19.58	1
		81	41	20.55	20.66	20.64	0
		81	81	19.50	19.62	19.52	1
		162	0	19.57	19.59	19.66	1
60M	DFT-S 16QAM	1	1	19.52	19.57	19.53	1
60M	DFT-S 64QAM	1	1	18.11	18.14	18.13	2.5
60M	DFT-S 256QAM	1	1	16.08	16.13	16.05	4.5
60M	CP QPSK	1	1	19.14	19.21	19.15	1.5
BW	MCS Index	Channel		648334	650000	651666	3GPP MPR
		Frequency (MHz)		3725.01	3750	3774.99	
50M	DFT-S PI/2 BPSK	1	1	20.54	20.61	20.55	0
50M	DFT-S QPSK	1	1	20.56	20.71	20.63	0
		1	67	20.57	20.63	20.52	0
		1	131	20.50	20.66	20.55	0
		64	0	19.60	19.59	19.62	1
		64	35	20.59	20.60	20.63	0
		64	69	19.52	19.58	19.56	1
		128	0	19.55	19.65	19.58	1
50M	DFT-S 16QAM	1	1	19.53	19.57	19.52	1
50M	DFT-S 64QAM	1	1	18.03	18.15	18.10	2.5
50M	DFT-S 256QAM	1	1	16.05	16.13	16.08	4.5
50M	CP QPSK	1	1	19.19	19.20	19.19	1.5

NR Conducted Power_ENDC_SA

NR Band 78

BW	MCS Index	Channel		648000	650000	652000	3GPP MPR
		Frequency (MHz)		3720	3750	3780	
40M	DFT-S PI/2 BPSK	1	1	20.61	20.59	20.59	0
40M	DFT-S QPSK	1	1	20.65	20.71	20.67	0
		1	53	20.50	20.61	20.54	0
		1	104	20.58	20.62	20.61	0
		50	0	19.60	19.59	19.58	1
		50	28	20.61	20.61	20.65	0
		50	56	19.56	19.60	19.62	1
		100	0	19.62	19.60	19.58	1
40M	DFT-S 16QAM	1	1	19.54	19.55	19.55	1
40M	DFT-S 64QAM	1	1	18.04	18.11	18.10	2.5
40M	DFT-S 256QAM	1	1	16.05	16.08	16.07	4.5
40M	CP QPSK	1	1	19.13	19.25	19.21	1.5
BW	MCS Index	Channel		647668	650000	652332	3GPP MPR
		Frequency (MHz)		3715.02	3750	3784.98	
30M	DFT-S PI/2 BPSK	1	1	20.59	20.63	20.64	0
30M	DFT-S QPSK	1	1	20.66	20.66	20.66	0
		1	39	20.55	20.58	20.54	0
		1	76	20.50	20.56	20.59	0
		36	0	19.61	19.60	19.59	1
		36	21	20.63	20.65	20.63	0
		36	42	19.55	19.58	19.62	1
		75	0	19.59	19.68	19.61	1
30M	DFT-S 16QAM	1	1	19.49	19.57	19.58	1
30M	DFT-S 64QAM	1	1	18.12	18.09	18.07	2.5
30M	DFT-S 256QAM	1	1	16.00	16.08	16.01	4.5
30M	CP QPSK	1	1	19.19	19.15	19.15	1.5

NR Conducted Power_ENDC_SA

NR Band 78

BW	MCS Index	Channel		647500	650000	652500	3GPP MPR
		Frequency (MHz)		3712.5	3750	3787.5	
25M	DFT-S PI/2 BPSK	1	1	20.58	20.65	20.57	0
25M	DFT-S QPSK	1	1	20.61	20.66	20.66	0
		1	33	20.55	20.64	20.59	0
		1	63	20.57	20.59	20.55	0
		32	0	19.56	19.67	19.58	1
		32	17	20.56	20.69	20.66	0
		32	33	19.57	19.58	19.57	1
		64	0	19.54	19.62	19.64	1
25M	DFT-S 16QAM	1	1	19.52	19.53	19.59	1
25M	DFT-S 64QAM	1	1	18.10	18.09	18.10	2.5
25M	DFT-S 256QAM	1	1	16.05	16.11	16.04	4.5
25M	CP QPSK	1	1	19.12	19.17	19.21	1.5
BW	MCS Index	Channel		647334	650000	652666	3GPP MPR
		Frequency (MHz)		3710.01	3750	3789.99	
20M	DFT-S PI/2 BPSK	1	1	20.59	20.64	20.55	0
20M	DFT-S QPSK	1	1	20.62	20.64	20.60	0
		1	26	20.53	20.63	20.56	0
		1	49	20.57	20.61	20.53	0
		25	0	19.53	19.68	19.57	1
		25	13	20.55	20.62	20.58	0
		25	26	19.57	19.59	19.57	1
		50	0	19.60	19.61	19.66	1
20M	DFT-S 16QAM	1	1	19.49	19.61	19.53	1
20M	DFT-S 64QAM	1	1	18.13	18.13	18.10	2.5
20M	DFT-S 256QAM	1	1	16.01	16.04	16.01	4.5
20M	CP QPSK	1	1	19.19	19.25	19.12	1.5

NR Conducted Power_ENDC_SA

NR Band 78

BW	MCS Index	Channel		647168	650000	652832	3GPP MPR
		Frequency (MHz)		3707.52	3750	3792.48	
15M	DFT-S PI/2 BPSK	1	1	20.57	20.64	20.63	0
15M	DFT-S QPSK	1	1	20.64	20.68	20.67	0
		1	19	20.59	20.64	20.53	0
		1	36	20.50	20.56	20.53	0
		18	0	19.56	19.64	19.65	1
		18	10	20.60	20.69	20.58	0
		18	20	19.57	19.59	19.61	1
		36	0	19.57	19.68	19.66	1
15M	DFT-S 16QAM	1	1	19.55	19.62	19.52	1
15M	DFT-S 64QAM	1	1	18.10	18.09	18.06	2.5
15M	DFT-S 256QAM	1	1	16.07	16.14	16.07	4.5
15M	CP QPSK	1	1	19.14	19.19	19.21	1.5
BW	MCS Index	Channel		647000	650000	653000	3GPP MPR
		Frequency (MHz)		3705	3750	3795	
10M	DFT-S PI/2 BPSK	1	1	20.60	20.61	20.63	0
10M	DFT-S QPSK	1	1	20.61	20.63	20.62	0
		1	11	20.56	20.61	20.58	0
		1	22	20.51	20.62	20.56	0
		12	0	19.56	19.62	19.62	1
		12	6	20.60	20.60	20.64	0
		12	12	19.55	19.59	19.53	1
		24	0	19.55	19.69	19.56	1
10M	DFT-S 16QAM	1	1	19.52	19.52	19.51	1
10M	DFT-S 64QAM	1	1	18.05	18.16	18.15	2.5
10M	DFT-S 256QAM	1	1	15.98	16.08	16.08	4.5
10M	CP QPSK	1	1	19.10	19.15	19.14	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 2

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	14.12	14.31	14.38	0
20M	DFT-S QPSK	1	1	14.16	14.39	14.45	0
		1	53	14.07	14.22	14.39	0
		1	104	14.12	14.27	14.44	0
		50	0	13.21	13.44	13.49	1
		50	28	14.08	14.23	14.40	0
		50	56	13.05	13.20	13.37	1
		100	0	13.32	13.37	13.47	1
20M	DFT-S 16QAM	1	1	13.02	13.17	13.34	1
20M	DFT-S 64QAM	1	1	11.59	11.74	11.91	2.5
20M	DFT-S 256QAM	1	1	9.49	9.64	9.81	4.5
20M	CP QPSK	1	1	12.65	12.80	12.97	1.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	14.12	14.22	14.36	0
15M	DFT-S QPSK	1	1	14.14	14.27	14.45	0
		1	40	14.02	14.19	14.39	0
		1	77	14.06	14.26	14.34	0
		36	0	13.09	13.15	13.33	1
		36	22	14.07	14.15	14.31	0
		36	43	13.04	13.16	13.33	1
		75	0	12.93	13.10	13.34	1
15M	DFT-S 16QAM	1	1	13.00	13.09	13.30	1
15M	DFT-S 64QAM	1	1	11.57	11.74	11.89	2.5
15M	DFT-S 256QAM	1	1	9.49	9.62	9.80	4.5
15M	CP QPSK	1	1	12.63	12.74	12.92	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 2

BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	14.07	14.22	14.43	0
10M	DFT-S QPSK	1	1	14.11	14.21	14.39	0
		1	26	14.00	14.21	14.33	0
		1	50	14.05	14.26	14.38	0
		25	0	13.09	13.20	13.32	1
		25	14	14.06	14.15	14.31	0
		25	27	13.00	13.19	13.27	1
		50	0	12.96	13.14	13.24	1
10M	DFT-S 16QAM	1	1	12.99	13.12	13.28	1
10M	DFT-S 64QAM	1	1	11.51	11.68	11.82	2.5
10M	DFT-S 256QAM	1	1	9.48	9.64	9.74	4.5
10M	CP QPSK	1	1	12.60	12.71	12.90	1.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	14.12	14.19	14.34	0
5M	DFT-S QPSK	1	1	14.13	14.28	14.42	0
		1	13	14.02	14.12	14.29	0
		1	23	14.11	14.27	14.35	0
		12	0	13.03	13.14	13.35	1
		12	7	14.07	14.22	14.35	0
		12	13	13.02	13.20	13.36	1
		25	0	12.99	13.12	13.30	1
5M	DFT-S 16QAM	1	1	12.96	13.10	13.31	1
5M	DFT-S 64QAM	1	1	11.59	11.73	11.86	2.5
5M	DFT-S 256QAM	1	1	9.47	9.58	9.77	4.5
5M	CP QPSK	1	1	12.65	12.75	12.87	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 5

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	18.33	18.40	18.32	0
20M	DFT-S QPSK	1	1	18.33	18.49	18.44	0
		1	53	18.28	18.40	18.25	0
		1	104	18.33	18.45	18.30	0
		50	0	17.30	17.51	17.27	1
		50	28	18.29	18.41	18.26	0
		50	56	17.26	17.38	17.23	1
		100	0	17.23	17.43	17.20	1
20M	DFT-S 16QAM	1	1	17.23	17.35	17.20	1
20M	DFT-S 64QAM	1	1	15.80	15.92	15.77	2.5
20M	DFT-S 256QAM	1	1	13.70	13.82	13.67	4.5
20M	CP QPSK	1	1	16.86	16.98	16.83	1.5
BW	MCS Index	Channel		166300	167300	168300	3GPP MPR
		Frequency (MHz)		831.5	836.5	841.5	
15M	DFT-S PI/2 BPSK	1	1	18.29	18.32	18.22	0
15M	DFT-S QPSK	1	1	18.35	18.45	18.31	0
		1	40	18.23	18.37	18.25	0
		1	77	18.27	18.44	18.20	0
		36	0	17.30	17.33	17.19	1
		36	22	18.28	18.33	18.17	0
		36	43	17.25	17.34	17.19	1
		75	0	17.14	17.28	17.20	1
15M	DFT-S 16QAM	1	1	17.21	17.27	17.16	1
15M	DFT-S 64QAM	1	1	15.78	15.92	15.75	2.5
15M	DFT-S 256QAM	1	1	13.70	13.80	13.66	4.5
15M	CP QPSK	1	1	16.84	16.92	16.78	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 5

BW	MCS Index	Channel		165800	167300	168800	3GPP MPR
		Frequency (MHz)		829	836.5	844	
10M	DFT-S PI/2 BPSK	1	1	18.28	18.40	18.29	0
10M	DFT-S QPSK	1	1	18.32	18.39	18.25	0
		1	26	18.21	18.39	18.19	0
		1	50	18.26	18.44	18.24	0
		25	0	17.30	17.38	17.18	1
		25	14	18.27	18.33	18.17	0
		25	27	17.21	17.37	17.13	1
		50	0	17.17	17.32	17.10	1
10M	DFT-S 16QAM	1	1	17.20	17.30	17.14	1
10M	DFT-S 64QAM	1	1	15.72	15.86	15.68	2.5
10M	DFT-S 256QAM	1	1	13.69	13.82	13.60	4.5
10M	CP QPSK	1	1	16.81	16.89	16.76	1.5
BW	MCS Index	Channel		165300	167300	169300	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	DFT-S PI/2 BPSK	1	1	18.33	18.37	18.20	0
5M	DFT-S QPSK	1	1	18.34	18.46	18.28	0
		1	13	18.23	18.30	18.15	0
		1	23	18.32	18.45	18.21	0
		12	0	17.24	17.32	17.21	1
		12	7	18.28	18.40	18.21	0
		12	13	17.23	17.38	17.22	1
		25	0	17.20	17.30	17.16	1
5M	DFT-S 16QAM	1	1	17.17	17.28	17.17	1
5M	DFT-S 64QAM	1	1	15.80	15.91	15.72	2.5
5M	DFT-S 256QAM	1	1	13.68	13.76	13.63	4.5
5M	CP QPSK	1	1	16.86	16.93	16.73	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 7

BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	12.86	13.02	13.04	0
20M	DFT-S QPSK	1	1	13.03	13.09	13.18	0
		1	53	12.89	12.90	13.06	0
		1	104	12.86	12.97	13.00	0
		50	0	12.07	12.25	12.35	1
		50	28	12.86	12.90	13.06	0
		50	56	12.11	12.23	12.33	1
		100	0	12.28	12.18	12.38	1
20M	DFT-S 16QAM	1	1	12.28	12.45	12.45	1
20M	DFT-S 64QAM	1	1	10.55	10.59	10.75	2.5
20M	DFT-S 256QAM	1	1	8.68	8.75	8.87	4.5
20M	CP QPSK	1	1	11.70	11.72	11.87	1.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	12.81	12.92	13.01	0
15M	DFT-S QPSK	1	1	12.92	12.98	13.16	0
		1	40	12.88	13.00	13.17	0
		1	77	12.86	12.88	13.05	0
		36	0	12.12	12.19	12.38	1
		36	22	12.90	12.93	13.15	0
		36	43	12.10	12.24	12.28	1
		75	0	12.19	12.15	12.32	1
15M	DFT-S 16QAM	1	1	12.33	12.40	12.53	1
15M	DFT-S 64QAM	1	1	10.58	10.54	10.72	2.5
15M	DFT-S 256QAM	1	1	8.69	8.76	8.86	4.5
15M	CP QPSK	1	1	11.66	11.76	11.87	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 7

BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	12.78	12.83	13.06	0
10M	DFT-S QPSK	1	1	12.77	12.95	13.12	0
		1	26	12.91	12.75	13.09	0
		1	50	12.86	12.95	13.04	0
		25	0	12.06	12.23	12.29	1
		25	14	12.84	12.94	13.00	0
		25	27	11.90	12.04	12.18	1
		50	0	12.09	12.14	12.20	1
10M	DFT-S 16QAM	1	1	12.15	12.32	12.46	1
10M	DFT-S 64QAM	1	1	10.52	10.60	10.69	2.5
10M	DFT-S 256QAM	1	1	8.69	8.82	8.73	4.5
10M	CP QPSK	1	1	11.61	11.83	11.86	1.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	12.90	12.91	12.99	0
5M	DFT-S QPSK	1	1	12.86	13.00	13.03	0
		1	13	12.91	12.99	13.11	0
		1	23	12.73	12.88	12.80	0
		12	0	12.09	12.06	12.31	1
		12	7	12.77	12.85	12.96	0
		12	13	11.96	12.08	12.07	1
		25	0	12.20	12.04	12.21	1
5M	DFT-S 16QAM	1	1	12.20	12.41	12.49	1
5M	DFT-S 64QAM	1	1	10.49	10.44	10.57	2.5
5M	DFT-S 256QAM	1	1	8.50	8.69	8.69	4.5
5M	CP QPSK	1	1	11.62	11.77	11.81	1.5

NR Conducted Power_ENDC_Laptop_Ant 0							
NR Band 25							
BW	MCS Index	Channel		372000	376500	381000	3GPP MPR
		Frequency (MHz)		1860	1882.5	1905	
20M	DFT-S PI/2 BPSK	1	1	13.56	13.65	14.08	0
20M	DFT-S QPSK	1	1	13.64	13.75	14.11	0
		1	53	13.54	13.59	14.03	0
		1	104	13.53	13.56	14.00	0
		50	0	12.52	12.57	13.01	1
		50	28	13.56	13.62	14.06	0
		50	56	12.53	12.52	12.93	1
		100	0	12.55	12.59	13.03	1
20M	DFT-S 16QAM	1	1	12.52	12.53	12.90	1
20M	DFT-S 64QAM	1	1	11.03	11.13	11.57	2.5
20M	DFT-S 256QAM	1	1	9.02	9.03	9.47	4.5
20M	CP QPSK	1	1	12.11	12.21	12.65	1.5
BW	MCS Index	Channel		371500	376500	381500	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	DFT-S PI/2 BPSK	1	1	13.52	13.65	14.08	0
15M	DFT-S QPSK	1	1	13.59	13.69	14.06	0
		1	40	13.54	13.56	13.95	0
		1	77	13.52	13.50	13.98	0
		36	0	12.51	12.50	12.97	1
		36	22	13.53	13.55	14.06	0
		36	43	12.53	12.52	12.84	1
		75	0	12.52	12.53	13.02	1
15M	DFT-S 16QAM	1	1	12.53	12.54	12.90	1
15M	DFT-S 64QAM	1	1	11.02	11.12	11.55	2.5
15M	DFT-S 256QAM	1	1	9.02	9.03	9.42	4.5
15M	CP QPSK	1	1	12.05	12.12	12.63	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 25

BW	MCS Index	Channel		371000	376500	382000	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	DFT-S PI/2 BPSK	1	1	13.53	13.64	14.03	0
10M	DFT-S QPSK	1	1	13.52	13.61	14.02	0
		1	26	13.54	13.54	13.97	0
		1	50	13.54	13.53	13.97	0
		25	0	12.55	12.54	12.97	1
		25	14	13.52	13.61	14.04	0
		25	27	12.54	12.52	12.88	1
		50	0	12.53	12.53	13.02	1
10M	DFT-S 16QAM	1	1	12.53	12.55	12.89	1
10M	DFT-S 64QAM	1	1	11.02	11.06	11.54	2.5
10M	DFT-S 256QAM	1	1	9.03	9.02	9.40	4.5
10M	CP QPSK	1	1	12.10	12.17	12.59	1.5
BW	MCS Index	Channel		370500	376500	382500	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	DFT-S PI/2 BPSK	1	1	13.52	13.59	14.05	0
5M	DFT-S QPSK	1	1	13.57	13.68	14.06	0
		1	13	13.53	13.59	13.96	0
		1	23	13.52	13.54	13.97	0
		12	0	13.52	12.53	13.00	1
		12	7	13.51	13.62	14.03	0
		12	13	12.51	12.53	12.84	1
		25	0	12.52	12.51	12.97	1
5M	DFT-S 16QAM	1	1	12.55	12.53	12.90	1
5M	DFT-S 64QAM	1	1	11.06	11.09	11.56	2.5
5M	DFT-S 256QAM	1	1	9.03	9.02	9.45	4.5
5M	CP QPSK	1	1	12.11	12.13	12.61	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 30

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			462000		
		Frequency (MHz)			2310		
10M	DFT-S PI/2 BPSK	1	1		13.88		0
10M	DFT-S QPSK	1	1		13.92		0
		1	26		13.86		0
		1	50		13.88		0
		25	0		12.94		1
		25	14		13.89		0
		25	27		12.92		1
		50	0		12.95		1
10M	DFT-S 16QAM	1	1		12.91		1
10M	DFT-S 64QAM	1	1		11.45		2.5
10M	DFT-S 256QAM	1	1		9.39		4.5
10M	CP QPSK	1	1		12.51		1.5
BW	MCS Index	Channel		461500	462000	462500	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	DFT-S PI/2 BPSK	1	1	13.82	13.85	13.79	0
5M	DFT-S QPSK	1	1	13.85	13.89	13.88	0
		1	13	13.74	13.79	13.77	0
		1	23	13.81	13.80	13.81	0
		12	0	12.80	12.88	12.86	1
		12	7	13.75	13.88	13.83	0
		12	13	12.81	12.82	12.85	1
		25	0	12.88	12.94	12.81	1
5M	DFT-S 16QAM	1	1	12.80	12.84	12.80	1
5M	DFT-S 64QAM	1	1	11.40	11.39	11.39	2.5
5M	DFT-S 256QAM	1	1	9.33	9.33	9.33	4.5
5M	CP QPSK	1	1	12.37	12.45	12.39	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 66

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		346000	349000	352000	
		Frequency (MHz)		1730	1745	1760	
40M	DFT-S PI/2 BPSK	1	1	15.78	15.95	15.92	0
40M	DFT-S QPSK	1	1	15.86	15.97	15.94	0
		1	108	15.86	15.93	15.90	0
		1	214	15.83	15.90	15.87	0
		108	0	14.83	14.86	14.85	1
		108	54	15.87	15.94	15.91	0
		108	108	14.83	14.85	14.84	1
		216	0	14.82	14.87	14.84	1
40M	DFT-S 16QAM	1	1	14.82	14.84	14.83	1
40M	DFT-S 64QAM	1	1	13.37	13.44	13.41	2.5
40M	DFT-S 256QAM	1	1	11.32	11.35	11.33	4.5
40M	CP QPSK	1	1	14.36	14.43	14.40	1.5
BW	MCS Index	Channel		345000	349000	353000	3GPP MPR
		Frequency (MHz)		1725	1745	1765	
30M	DFT-S PI/2 BPSK	1	1	15.83	15.88	15.88	0
30M	DFT-S QPSK	1	1	15.81	15.96	15.89	0
		1	80	15.82	15.86	15.81	0
		1	158	15.82	15.90	15.81	0
		80	0	14.83	14.85	14.83	1
		80	40	15.82	15.84	15.88	0
		80	80	14.83	14.81	14.83	1
		160	0	14.81	14.87	14.84	1
30M	DFT-S 16QAM	1	1	14.86	14.82	14.81	1
30M	DFT-S 64QAM	1	1	13.37	13.36	13.36	2.5
30M	DFT-S 256QAM	1	1	11.33	11.32	11.34	4.5
30M	CP QPSK	1	1	14.35	14.38	14.36	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 66

BW	MCS Index	Channel		344500	349000	353500	3GPP MPR
		Frequency (MHz)		1722.5	1745	1767.5	
25M	DFT-S PI/2 BPSK	1	1	15.83	15.95	15.92	0
25M	DFT-S QPSK	1	1	15.87	15.95	15.89	0
		1	67	15.86	15.84	15.81	0
		1	131	15.84	15.89	15.82	0
		64	0	14.83	14.84	14.84	1
		64	35	15.83	15.94	15.91	0
		64	69	14.81	14.83	14.84	1
		128	0	14.85	14.83	14.83	1
25M	DFT-S 16QAM	1	1	14.86	14.84	14.87	1
25M	DFT-S 64QAM	1	1	13.31	13.35	13.40	2.5
25M	DFT-S 256QAM	1	1	11.32	11.33	11.33	4.5
25M	CP QPSK	1	1	14.34	14.34	14.39	1.5
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	15.87	15.87	15.83	0
20M	DFT-S QPSK	1	1	15.86	15.94	15.85	0
		1	53	15.83	15.88	15.88	0
		1	104	15.82	15.85	15.84	0
		50	0	14.83	14.84	14.83	1
		50	28	15.83	15.91	15.82	0
		50	56	14.84	14.86	14.83	1
		100	0	14.82	14.87	14.85	1
20M	DFT-S 16QAM	1	1	14.86	14.82	14.83	1
20M	DFT-S 64QAM	1	1	13.35	13.44	13.35	2.5
20M	DFT-S 256QAM	1	1	11.34	11.32	11.31	4.5
20M	CP QPSK	1	1	14.33	14.33	14.35	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 66

BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	15.83	15.93	15.88	0
15M	DFT-S QPSK	1	1	15.83	15.91	15.86	0
		1	40	15.84	15.89	15.87	0
		1	77	15.82	15.85	15.82	0
		36	0	14.82	14.86	14.83	1
		36	22	15.82	15.86	15.91	0
		36	43	14.87	14.82	14.83	1
		75	0	14.86	14.85	14.87	1
15M	DFT-S 16QAM	1	1	14.83	14.85	14.84	1
15M	DFT-S 64QAM	1	1	13.32	13.43	13.40	2.5
15M	DFT-S 256QAM	1	1	11.32	11.34	11.33	4.5
15M	CP QPSK	1	1	14.31	14.38	14.34	1.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	15.83	15.92	15.92	0
10M	DFT-S QPSK	1	1	15.84	15.94	15.91	0
		1	26	15.82	15.90	15.86	0
		1	50	15.83	15.87	15.85	0
		25	0	14.83	14.85	14.86	1
		25	14	15.86	15.87	15.86	0
		25	27	14.84	14.87	14.81	1
		50	0	14.88	14.84	14.83	1
10M	DFT-S 16QAM	1	1	14.81	14.83	14.83	1
10M	DFT-S 64QAM	1	1	13.34	13.44	13.32	2.5
10M	DFT-S 256QAM	1	1	11.32	11.33	11.34	4.5
10M	CP QPSK	1	1	14.32	14.38	14.39	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 66

BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	15.84	15.88	15.85	0
5M	DFT-S QPSK	1	1	15.86	15.87	15.86	0
		1	13	15.81	15.88	15.83	0
		1	23	15.84	15.88	15.82	0
		12	0	14.86	14.83	14.84	1
		12	7	15.85	15.87	15.82	0
		12	13	14.87	14.85	14.83	1
		25	0	14.82	14.81	14.82	1
5M	DFT-S 16QAM	1	1	15.83	14.83	14.81	1
5M	DFT-S 64QAM	1	1	13.33	13.39	13.39	2.5
5M	DFT-S 256QAM	1	1	11.33	11.34	11.33	4.5
5M	CP QPSK	1	1	14.34	14.37	14.35	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 71

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		134600	136100	137600	
		Frequency (MHz)		673	680.5	688	
20M	DFT-S PI/2 BPSK	1	1	19.24	19.21	19.30	0
20M	DFT-S QPSK	1	1	19.25	19.23	19.35	0
		1	53	19.23	19.20	19.29	0
		1	104	19.20	19.17	19.26	0
		50	0	18.23	18.20	18.29	1
		50	28	19.26	19.23	19.32	0
		50	56	18.19	18.16	18.25	1
		100	0	18.24	18.21	18.30	1
20M	DFT-S 16QAM	1	1	18.17	18.14	18.23	1
20M	DFT-S 64QAM	1	1	16.94	16.91	17.00	2.5
20M	DFT-S 256QAM	1	1	14.89	14.86	14.95	4.5
20M	CP QPSK	1	1	17.77	17.74	17.83	1.5
BW	MCS Index	Channel		134100	136100	138100	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	DFT-S PI/2 BPSK	1	1	19.22	19.13	19.20	0
15M	DFT-S QPSK	1	1	19.29	19.16	19.29	0
		1	40	19.13	19.10	19.21	0
		1	77	19.11	19.14	19.24	0
		36	0	18.20	18.12	18.28	1
		36	22	19.25	19.17	19.23	0
		36	43	18.16	18.10	18.25	1
		75	0	18.20	18.18	18.20	1
15M	DFT-S 16QAM	1	1	18.10	18.04	18.19	1
15M	DFT-S 64QAM	1	1	16.91	16.88	16.98	2.5
15M	DFT-S 256QAM	1	1	14.86	14.84	14.90	4.5
15M	CP QPSK	1	1	17.72	17.73	17.79	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 71

BW	MCS Index	Channel		133600	136100	138600	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	DFT-S PI/2 BPSK	1	1	19.23	19.15	19.30	0
10M	DFT-S QPSK	1	1	19.20	19.24	19.33	0
		1	26	19.18	19.15	19.21	0
		1	50	19.11	19.09	19.17	0
		25	0	18.20	18.12	18.26	1
		25	14	19.20	19.14	19.25	0
		25	27	18.14	18.09	18.22	1
		50	0	18.18	18.20	18.24	1
10M	DFT-S 16QAM	1	1	18.16	18.14	18.15	1
10M	DFT-S 64QAM	1	1	16.92	16.84	16.93	2.5
10M	DFT-S 256QAM	1	1	14.84	14.83	14.90	4.5
10M	CP QPSK	1	1	17.67	17.72	17.79	1.5
BW	MCS Index	Channel		133100	136100	139100	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	DFT-S PI/2 BPSK	1	1	19.21	19.18	19.27	0
5M	DFT-S QPSK	1	1	19.29	19.25	19.26	0
		1	13	19.17	19.14	19.25	0
		1	23	19.18	19.12	19.18	0
		12	0	18.16	18.17	18.24	1
		12	7	19.20	19.14	19.23	0
		12	13	18.13	18.12	18.15	1
		25	0	18.22	18.16	18.22	1
5M	DFT-S 16QAM	1	1	18.14	18.14	18.23	1
5M	DFT-S 64QAM	1	1	16.93	16.89	17.00	2.5
5M	DFT-S 256QAM	1	1	14.84	14.77	14.87	4.5
5M	CP QPSK	1	1	17.69	17.69	17.76	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 38

BW	MCS Index	Channel		516000	519000	522000	3GPP MPR
		Frequency (MHz)		2580	2595	2610	
20M	DFT-S PI/2 BPSK	1	1	14.44	14.19	14.44	0
20M	DFT-S QPSK	1	1	14.47	14.21	14.46	0
		1	26	14.40	14.18	14.42	0
		1	49	14.38	14.17	14.41	0
		25	0	13.38	13.18	13.43	1
		25	13	14.41	14.17	14.41	0
		25	26	13.37	13.17	13.42	1
		50	0	13.40	13.18	13.39	1
20M	DFT-S 16QAM	1	1	13.35	13.18	13.40	1
20M	DFT-S 64QAM	1	1	11.87	11.69	11.91	2.5
20M	DFT-S 256QAM	1	1	9.89	9.68	9.90	4.5
20M	CP QPSK	1	1	12.86	12.67	12.91	1.5
BW	MCS Index	Channel		515500	519000	522500	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	DFT-S PI/2 BPSK	1	1	14.38	14.17	14.40	0
15M	DFT-S QPSK	1	1	14.38	14.19	14.41	0
		1	19	14.35	14.17	14.43	0
		1	36	14.34	14.20	14.41	0
		18	0	13.35	13.19	13.43	1
		18	10	14.35	14.17	14.41	0
		18	20	13.36	13.17	13.44	1
		36	0	13.38	13.22	13.44	1
15M	DFT-S 16QAM	1	1	13.34	13.19	13.43	1
15M	DFT-S 64QAM	1	1	11.84	11.68	11.92	2.5
15M	DFT-S 256QAM	1	1	9.84	9.68	9.90	4.5
15M	CP QPSK	1	1	12.86	12.68	12.90	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 38

BW	MCS Index	Channel		515000	519000	523000	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	DFT-S PI/2 BPSK	1	1	14.39	14.18	14.42	0
10M	DFT-S QPSK	1	1	14.45	14.17	14.40	0
		1	11	14.35	14.19	14.39	0
		1	22	14.34	14.19	14.40	0
		12	0	13.35	13.19	13.42	1
		12	6	14.34	14.20	14.40	0
		12	12	13.34	13.19	13.43	1
		24	0	13.39	13.18	13.43	1
10M	DFT-S 16QAM	1	1	13.38	13.18	13.41	1
10M	DFT-S 64QAM	1	1	11.85	11.68	11.92	2.5
10M	DFT-S 256QAM	1	1	9.85	9.72	9.91	4.5
10M	CP QPSK	1	1	12.85	12.67	12.90	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 41

BW	MCS Index	Channel		507204	509304	518598	500298	529998	3GPP MPR
		Frequency (MHz)		2536.02	2546.52	2592.99	2621.49	2649.99	
80M	DFT-S PI/2 BPSK	1	1	15.82	15.90	15.64	15.57	15.81	0
80M	DFT-S QPSK	1	1	15.83	15.92	15.66	15.57	15.83	0
		1	109	15.81	15.86	15.60	15.53	15.80	0
		1	215	15.80	15.83	15.57	15.52	15.82	0
		108	0	14.81	14.84	14.59	14.53	14.81	1
		108	55	15.80	15.87	15.61	15.54	15.81	0
		108	109	14.81	14.82	14.56	14.53	14.81	1
		216	0	14.82	14.85	14.59	14.52	14.82	1
80M	DFT-S 16QAM	1	1	14.80	14.80	14.56	14.53	14.81	1
80M	DFT-S 64QAM	1	1	13.32	13.31	13.05	13.07	13.32	2.5
80M	DFT-S 256QAM	1	1	11.31	11.34	11.08	11.01	11.31	4.5
80M	CP QPSK	1	1	14.32	14.35	14.09	14.04	14.35	1.5
BW	MCS Index	Channel		506202	512400	518598	524802	531000	3GPP MPR
		Frequency (MHz)		2531.01	2562	2592.99	2624.01	2655	
70M	DFT-S PI/2 BPSK	1	1	15.81	15.90	15.55	15.53	15.83	0
70M	DFT-S QPSK	1	1	15.82	15.88	15.57	15.55	15.81	0
		1	95	15.82	15.86	15.57	15.51	15.80	0
		1	187	15.82	15.79	15.58	15.56	15.83	0
		90	0	14.82	14.80	14.58	14.52	14.82	1
		90	50	15.85	15.80	15.56	15.54	15.80	0
		90	99	14.82	14.83	14.56	14.56	14.80	1
		180	0	14.82	14.80	14.58	14.52	14.82	1
70M	DFT-S 16QAM	1	1	14.81	14.83	14.56	14.51	14.82	1
70M	DFT-S 64QAM	1	1	13.31	13.34	13.08	13.02	13.32	2.5
70M	DFT-S 256QAM	1	1	11.32	11.30	11.08	11.01	11.30	4.5
70M	CP QPSK	1	1	14.32	14.30	14.05	14.02	14.32	1.5

NR Conducted Power_ENDC_Laptop_Ant 0									
NR Band 41									
BW	MCS Index	Channel		505200	511896	518598	525294	531996	3GPP MPR
		Frequency (MHz)		2526	2559.48	2592.99	2626.48	2659.98	
60M	DFT-S PI/2 BPSK	1	1	15.81	15.82	15.63	15.53	15.83	0
60M	DFT-S QPSK	1	1	15.82	15.82	15.56	15.51	15.81	0
		1	81	15.84	15.84	15.55	15.52	15.80	0
		1	160	15.81	15.81	15.58	15.51	15.81	0
		81	0	14.81	14.80	14.57	14.51	14.85	1
		81	41	15.82	15.83	15.57	15.52	15.81	0
		81	81	14.81	14.81	14.55	14.53	14.81	1
		162	0	14.80	14.81	14.56	14.51	14.82	1
60M	DFT-S 16QAM	1	1	14.82	14.81	14.59	14.55	14.80	1
60M	DFT-S 64QAM	1	1	13.32	13.29	13.08	13.03	13.31	2.5
60M	DFT-S 256QAM	1	1	11.35	11.30	11.08	11.03	11.31	4.5
60M	CP QPSK	1	1	14.32	14.33	14.08	14.01	14.35	1.5
BW	MCS Index	Channel		504204	511404	518598	525798	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.02	2592.99	2628.99	2664.99	
50M	DFT-S PI/2 BPSK	1	1	15.80	15.83	15.61	15.56	15.81	0
50M	DFT-S QPSK	1	1	15.82	15.86	15.63	15.55	15.82	0
		1	67	15.83	15.80	15.57	15.53	15.81	0
		1	131	15.82	15.83	15.58	15.51	15.83	0
		64	0	14.81	14.79	14.57	14.54	14.81	1
		64	35	15.80	15.85	15.57	15.51	15.82	0
		64	69	14.81	14.81	14.59	14.52	14.82	1
		128	0	14.82	14.84	14.56	14.52	14.83	1
50M	DFT-S 16QAM	1	1	14.81	14.83	14.55	14.53	14.81	1
50M	DFT-S 64QAM	1	1	13.32	13.30	13.05	13.07	13.31	2.5
50M	DFT-S 256QAM	1	1	11.35	11.31	11.06	11.01	11.36	4.5
50M	CP QPSK	1	1	14.31	14.34	14.05	14.04	14.30	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 41

BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	15.80	15.89	15.62	15.51	15.80	0
40M	DFT-S QPSK	1	1	15.82	15.87	15.61	15.55	15.80	0
		1	53	15.81	15.81	15.58	15.51	15.81	0
		1	104	15.80	15.84	15.59	15.54	15.82	0
		50	0	14.80	14.83	14.57	14.52	14.82	1
		50	28	15.80	15.81	15.55	15.52	15.83	0
		50	56	14.82	14.80	14.59	14.51	14.80	1
		100	0	14.80	14.81	14.56	14.54	14.80	1
40M	DFT-S 16QAM	1	1	14.82	14.83	14.55	14.52	14.85	1
40M	DFT-S 64QAM	1	1	13.32	13.31	13.05	13.02	13.32	2.5
40M	DFT-S 256QAM	1	1	11.35	11.30	11.08	11.01	11.31	4.5
40M	CP QPSK	1	1	14.32	14.32	14.08	14.01	14.35	1.5
BW	MCS Index	Channel		502200	510396	518598	526794	534996	3GPP MPR
		Frequency (MHz)		2511	2551.98	2592.99	2633.97	2674.98	
30M	DFT-S PI/2 BPSK	1	1	15.83	15.90	15.56	15.53	15.83	0
30M	DFT-S QPSK	1	1	15.82	15.82	15.62	15.57	15.81	0
		1	39	15.81	15.86	15.55	15.51	15.80	0
		1	76	15.82	15.81	15.56	15.54	15.80	0
		36	0	14.81	14.80	14.57	14.54	14.84	1
		36	21	15.85	15.82	15.55	15.52	15.82	0
		36	42	14.80	14.81	14.56	14.52	14.84	1
		75	0	14.80	14.80	14.57	14.51	14.81	1
30M	DFT-S 16QAM	1	1	14.83	14.83	14.56	14.54	14.84	1
30M	DFT-S 64QAM	1	1	13.32	13.32	13.06	13.01	13.33	2.5
30M	DFT-S 256QAM	1	1	11.31	11.34	11.07	11.04	11.30	4.5
30M	CP QPSK	1	1	14.32	14.29	14.05	14.02	14.30	1.5

NR Conducted Power_ENDC_Laptop_Ant 0									
NR Band 41									
BW	MCS Index	Channel		501204	509898	518598	527298	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.49	2592.99	2636.49	2679.99	
20M	DFT-S PI/2 BPSK	1	1	15.81	15.83	15.60	15.53	15.82	0
20M	DFT-S QPSK	1	1	15.82	15.91	15.62	15.53	15.81	0
		1	26	15.83	15.84	15.59	15.53	15.82	0
		1	49	15.80	15.82	15.56	15.53	15.80	0
		25	0	14.82	14.81	14.59	14.53	14.81	1
		25	13	15.82	15.82	15.56	15.54	15.81	0
		25	26	14.80	14.80	14.56	14.51	14.82	1
		50	0	14.81	14.79	14.57	14.54	14.81	1
20M	DFT-S 16QAM	1	1	14.82	14.80	14.58	14.52	14.80	1
20M	DFT-S 64QAM	1	1	13.31	13.30	13.07	13.05	13.30	2.5
20M	DFT-S 256QAM	1	1	11.31	11.29	11.05	11.03	11.33	4.5
20M	CP QPSK	1	1	14.31	14.29	14.05	14.02	14.32	1.5
BW	MCS Index	Channel		500700	509646	518598	527544	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.23	2592.99	2637.72	2682.48	
15M	DFT-S PI/2 BPSK	1	1	15.82	15.86	15.57	15.55	15.81	0
15M	DFT-S QPSK	1	1	15.82	15.91	15.59	15.53	15.81	0
		1	19	15.80	15.86	15.56	15.51	15.82	0
		1	36	15.82	15.79	15.58	15.53	15.80	0
		18	0	14.82	14.82	14.56	14.54	14.81	1
		18	10	15.85	15.81	15.58	15.52	15.82	0
		18	20	14.82	14.82	14.56	14.53	14.81	1
		36	0	14.81	14.82	14.55	14.56	14.81	1
15M	DFT-S 16QAM	1	1	14.81	14.81	14.55	14.55	14.81	1
15M	DFT-S 64QAM	1	1	13.30	13.30	13.06	13.06	13.31	2.5
15M	DFT-S 256QAM	1	1	11.31	11.31	11.06	11.04	11.31	4.5
15M	CP QPSK	1	1	14.30	14.30	14.05	14.02	14.30	1.5

NR Conducted Power_ENDC_Laptop_Ant 0									
NR Band 41									
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	15.82	15.88	15.55	15.52	15.82	0
10M	DFT-S QPSK	1	1	15.82	15.88	15.61	15.55	15.81	0
		1	11	15.82	15.86	15.55	15.52	15.82	0
		1	22	15.80	15.81	15.55	15.54	15.80	0
		12	0	14.82	14.79	14.56	14.55	14.81	1
		12	6	15.82	15.83	15.60	15.54	15.81	0
		12	12	14.81	14.81	14.55	14.52	14.82	1
		24	0	14.85	14.79	14.59	14.52	14.81	1
10M	DFT-S 16QAM	1	1	14.80	14.83	14.56	14.51	14.82	1
10M	DFT-S 64QAM	1	1	13.31	13.30	13.07	13.03	13.35	2.5
10M	DFT-S 256QAM	1	1	11.31	11.32	11.07	11.01	11.30	4.5
10M	CP QPSK	1	1	14.30	14.30	14.06	14.03	14.31	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		640000	641110	642222	643332	
		Frequency (MHz)		3600	3616.65	3633.33	3649.98	
100M	DFT-S PI/2 BPSK	1	1	12.36	12.46	12.02	12.44	0
100M	DFT-S QPSK	1	1	12.38	12.48	12.07	12.46	0
		1	137	12.32	12.42	12.01	12.40	0
		1	271	12.30	12.40	11.99	12.38	0
		135	0	11.44	11.54	11.13	11.52	1
		135	69	12.35	12.45	12.04	12.43	0
		135	138	11.47	11.57	11.16	11.55	1
		270	0	11.49	11.59	11.18	11.57	1
100M	DFT-S 16QAM	1	1	11.42	11.52	11.11	11.50	1
100M	DFT-S 64QAM	1	1	9.80	9.90	9.49	9.88	2.5
100M	DFT-S 256QAM	1	1	7.87	7.97	7.56	7.95	4.5
100M	CP QPSK	1	1	10.75	10.85	10.44	10.83	1.5
BW	MCS Index	Channel		639668	641000	642332	643666	3GPP MPR
		Frequency (MHz)		3595.02	3615	3634.98	3654.99	
90M	DFT-S PI/2 BPSK	1	1	12.35	12.36	11.96	12.39	0
90M	DFT-S QPSK	1	1	12.35	12.41	11.98	12.38	0
		1	123	12.30	12.32	11.95	12.31	0
		1	243	12.25	12.32	11.95	12.31	0
		120	0	11.44	11.50	11.10	11.52	1
		120	63	12.30	12.45	12.01	12.33	0
		120	125	11.38	11.56	11.16	11.52	1
		243	0	11.43	11.50	11.15	11.50	1
90M	DFT-S 16QAM	1	1	11.37	11.43	11.11	11.47	1
90M	DFT-S 64QAM	1	1	9.70	9.88	9.43	9.88	2.5
90M	DFT-S 256QAM	1	1	7.86	7.90	7.50	7.93	4.5
90M	CP QPSK	1	1	10.69	10.76	10.38	10.81	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 48

BW	MCS Index	Channel		639334	640888	642444	644000	3GPP MPR
		Frequency (MHz)		3590.01	3613.32	3636.66	3660	
80M	DFT-S PI/2 BPSK	1	1	12.33	12.41	12.05	12.36	0
80M	DFT-S QPSK	1	1	12.33	12.40	11.98	12.39	0
		1	109	12.27	12.38	11.92	12.40	0
		1	215	12.27	12.36	11.89	12.36	0
		108	0	11.44	11.52	11.03	11.52	1
		108	55	12.27	12.39	12.02	12.43	0
		108	109	11.40	11.55	11.07	11.45	1
		216	0	11.47	11.52	11.11	11.50	1
80M	DFT-S 16QAM	1	1	11.39	11.45	11.06	11.50	1
80M	DFT-S 64QAM	1	1	9.71	9.82	9.41	9.84	2.5
80M	DFT-S 256QAM	1	1	7.78	7.92	7.51	7.95	4.5
80M	CP QPSK	1	1	10.75	10.79	10.42	10.82	1.5
BW	MCS Index	Channel		639000	640778	642548	644332	3GPP MPR
		Frequency (MHz)		3585	3611.67	3638.22	3664.98	
70M	DFT-S PI/2 BPSK	1	1	12.33	12.46	12.02	12.34	0
70M	DFT-S QPSK	1	1	12.29	12.38	12.03	12.42	0
		1	95	12.32	12.39	11.95	12.40	0
		1	187	12.30	12.30	11.96	12.31	0
		90	0	11.36	11.51	11.04	11.52	1
		90	50	12.31	12.43	11.96	12.42	0
		90	99	11.37	11.51	11.12	11.50	1
		180	0	11.43	11.51	11.18	11.51	1
70M	DFT-S 16QAM	1	1	11.36	11.42	11.03	11.44	1
70M	DFT-S 64QAM	1	1	9.71	9.82	9.49	9.85	2.5
70M	DFT-S 256QAM	1	1	7.78	7.91	7.54	7.86	4.5
70M	CP QPSK	1	1	10.70	10.77	10.39	10.75	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 48

BW	MCS Index	Channel		638668	640666	642666	644666	3GPP MPR
		Frequency (MHz)		3580.02	3609.99	3639.99	3669.99	
60M	DFT-S PI/2 BPSK	1	1	12.28	12.41	11.98	12.43	0
60M	DFT-S QPSK	1	1	12.34	12.40	12.04	12.42	0
		1	81	12.25	12.36	11.94	12.36	0
		1	160	12.21	12.30	11.92	12.34	0
		81	0	11.36	11.50	11.03	11.51	1
		81	41	12.27	12.36	12.00	12.34	0
		81	81	11.45	11.50	11.16	11.50	1
		162	0	11.48	11.53	11.14	11.50	1
60M	DFT-S 16QAM	1	1	11.36	11.48	11.05	11.40	1
60M	DFT-S 64QAM	1	1	9.80	9.89	9.39	9.86	2.5
60M	DFT-S 256QAM	1	1	7.86	7.95	7.51	7.89	4.5
60M	CP QPSK	1	1	10.69	10.84	10.39	10.78	1.5
BW	MCS Index	Channel		638334	640556	642778	645000	3GPP MPR
		Frequency (MHz)		3575.01	3608.34	3641.67	3675	
50M	DFT-S PI/2 BPSK	1	1	12.26	12.40	12.02	12.35	0
50M	DFT-S QPSK	1	1	12.34	12.43	11.99	12.39	0
		1	67	12.31	12.39	11.97	12.32	0
		1	131	12.26	12.39	11.96	12.28	0
		64	0	11.34	11.49	11.05	11.48	1
		64	35	12.25	12.43	11.96	12.40	0
		64	69	11.40	11.49	11.12	11.54	1
		128	0	11.44	11.55	11.12	11.48	1
50M	DFT-S 16QAM	1	1	11.34	11.42	11.04	11.49	1
50M	DFT-S 64QAM	1	1	9.76	9.81	9.49	9.83	2.5
50M	DFT-S 256QAM	1	1	7.82	7.90	7.51	7.95	4.5
50M	CP QPSK	1	1	10.69	10.78	10.35	10.76	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 48

BW	MCS Index	Channel		638000	640444	642888	645332	3GPP MPR
		Frequency (MHz)		3570	3606.66	3643.32	3679.98	
40M	DFT-S PI/2 BPSK	1	1	12.29	12.38	12.04	12.37	0
40M	DFT-S QPSK	1	1	12.34	12.40	11.98	12.46	0
		1	53	12.25	12.41	11.94	12.38	0
		1	104	12.23	12.30	11.98	12.28	0
		50	0	11.39	11.51	11.06	11.52	1
		50	28	12.30	12.36	11.99	12.42	0
		50	56	11.42	11.52	11.08	11.49	1
		100	0	11.44	11.58	11.09	11.53	1
40M	DFT-S 16QAM	1	1	11.32	11.46	11.09	11.49	1
40M	DFT-S 64QAM	1	1	9.79	9.83	9.39	9.86	2.5
40M	DFT-S 256QAM	1	1	7.82	7.95	7.47	7.90	4.5
40M	CP QPSK	1	1	10.75	10.83	10.42	10.74	1.5
BW	MCS Index	Channel		637334	640222	643110	646000	3GPP MPR
		Frequency (MHz)		3560.01	3603.33	3646.65	3690	
20M	DFT-S PI/2 BPSK	1	1	12.32	12.46	11.98	12.41	0
20M	DFT-S QPSK	1	1	12.32	12.47	12.01	12.39	0
		1	26	12.26	12.38	11.95	12.35	0
		1	49	12.22	12.34	11.92	12.30	0
		25	0	11.41	11.45	11.07	11.50	1
		25	13	12.34	12.35	11.94	12.33	0
		25	26	11.47	11.55	11.13	11.46	1
		50	0	11.48	11.59	11.15	11.56	1
20M	DFT-S 16QAM	1	1	11.42	11.45	11.07	11.43	1
20M	DFT-S 64QAM	1	1	9.77	9.83	9.48	9.84	2.5
20M	DFT-S 256QAM	1	1	7.83	7.90	7.49	7.88	4.5
20M	CP QPSK	1	1	10.73	10.85	10.36	10.77	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 48

BW	MCS Index	Channel		637168	640168	643166	646166	3GPP MPR
		Frequency (MHz)		3557.52	3602.52	3647.49	3692.49	
15M	DFT-S PI/2 BPSK	1	1	12.32	12.37	12.03	12.40	0
15M	DFT-S QPSK	1	1	12.38	12.41	11.99	12.39	0
		1	19	12.27	12.39	11.97	12.39	0
		1	36	12.30	12.33	11.91	12.28	0
		18	0	11.37	11.49	11.06	11.49	1
		18	10	12.32	12.44	11.99	12.36	0
		18	20	11.39	11.52	11.11	11.49	1
		36	0	11.39	11.52	11.09	11.55	1
15M	DFT-S 16QAM	1	1	11.36	11.43	11.03	11.46	1
15M	DFT-S 64QAM	1	1	9.78	9.81	9.45	9.86	2.5
15M	DFT-S 256QAM	1	1	7.79	7.94	7.52	7.87	4.5
15M	CP QPSK	1	1	10.73	10.83	10.39	10.79	1.5
BW	MCS Index	Channel		637000	640110	643222	646332	3GPP MPR
		Frequency (MHz)		3555	3601.65	3648.33	3694.98	
10M	DFT-S PI/2 BPSK	1	1	12.34	12.43	12.04	12.44	0
10M	DFT-S QPSK	1	1	12.32	12.38	11.99	12.42	0
		1	11	12.28	12.42	11.93	12.35	0
		1	22	12.23	12.34	11.93	12.36	0
		12	0	11.40	11.46	11.03	11.42	1
		12	6	12.31	12.37	12.03	12.42	0
		12	12	11.39	11.55	11.13	11.51	1
		24	0	11.44	11.51	11.10	11.56	1
10M	DFT-S 16QAM	1	1	11.39	11.50	11.02	11.47	1
10M	DFT-S 64QAM	1	1	9.77	9.80	9.44	9.87	2.5
10M	DFT-S 256QAM	1	1	7.78	7.91	7.56	7.87	4.5
10M	CP QPSK	1	1	10.65	10.85	10.43	10.78	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 77

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	11.19	11.01	11.13	11.08	11.46	0
100M	DFT-S QPSK	1	1	11.22	11.04	11.16	11.11	11.49	0
		1	137	11.16	10.98	11.10	11.05	11.43	0
		1	271	11.15	10.97	11.09	11.04	11.42	0
		135	0	10.21	10.03	10.15	10.10	10.48	1
		135	69	11.20	11.02	11.14	11.09	11.47	0
		135	138	10.19	10.01	10.13	10.08	10.46	1
		270	0	10.22	10.04	10.16	10.11	10.49	1
100M	DFT-S 16QAM	1	1	10.16	9.98	10.10	10.05	10.43	1
100M	DFT-S 64QAM	1	1	8.70	8.52	8.64	8.59	8.97	2.5
100M	DFT-S 256QAM	1	1	6.71	6.53	6.65	6.60	6.98	4.5
100M	CP QPSK	1	1	9.75	9.57	9.69	9.64	10.02	1.5
BW	MCS Index	Channel		649668	652834	656000	659166	662332	3GPP MPR
		Frequency (MHz)		3745.02	3792.51	3840	3887.49	3934.98	
90M	DFT-S PI/2 BPSK	1	1	11.11	10.99	11.04	11.08	11.46	0
90M	DFT-S QPSK	1	1	11.21	10.98	11.14	11.04	11.43	0
		1	123	11.09	10.95	11.00	11.03	11.43	0
		1	243	11.10	10.92	11.08	11.04	11.42	0
		120	0	10.16	9.99	10.12	10.07	10.44	1
		120	63	11.14	10.92	11.09	11.05	11.45	0
		120	125	10.09	10.01	10.03	10.02	10.45	1
		243	0	10.16	10.02	10.10	10.02	10.46	1
90M	DFT-S 16QAM	1	1	10.12	9.98	10.05	10.04	10.43	1
90M	DFT-S 64QAM	1	1	8.60	8.45	8.62	8.54	8.97	2.5
90M	DFT-S 256QAM	1	1	6.64	6.49	6.64	6.51	6.96	4.5
90M	CP QPSK	1	1	9.66	9.48	9.62	9.55	9.99	1.5

NR Conducted Power_ENDC_Laptop_Ant 0									
NR Band 77									
BW	MCS Index	Channel		649334	652666	656000	659334	662666	3GPP MPR
		Frequency (MHz)		3740.01	3789.99	3840	3890.01	3939.99	
80M	DFT-S PI/2 BPSK	1	1	11.15	10.95	11.08	11.00	11.39	0
80M	DFT-S QPSK	1	1	11.16	10.94	11.13	11.07	11.43	0
		1	109	11.13	10.97	11.06	10.95	11.43	0
		1	215	11.09	10.90	10.99	11.04	11.33	0
		108	0	10.18	9.96	10.06	10.04	10.41	1
		108	55	11.15	10.95	11.08	11.05	11.39	0
		108	109	10.11	9.96	10.03	10.00	10.46	1
		216	0	10.22	10.01	10.11	10.11	10.39	1
80M	DFT-S 16QAM	1	1	10.16	9.89	10.10	9.97	10.36	1
80M	DFT-S 64QAM	1	1	8.66	8.48	8.56	8.59	8.89	2.5
80M	DFT-S 256QAM	1	1	6.62	6.52	6.58	6.53	6.91	4.5
80M	CP QPSK	1	1	9.66	9.47	9.64	9.55	9.93	1.5
BW	MCS Index	Channel		649000	652500	656000	659500	663000	3GPP MPR
		Frequency (MHz)		3735	3787.5	3840	3892.5	3945	
70M	DFT-S PI/2 BPSK	1	1	11.14	11.00	11.13	11.05	11.46	0
70M	DFT-S QPSK	1	1	11.13	10.98	11.16	11.09	11.46	0
		1	95	11.07	10.89	11.08	10.97	11.35	0
		1	187	11.08	10.91	11.07	10.96	11.35	0
		90	0	10.12	9.95	10.07	10.03	10.44	1
		90	50	11.13	11.01	11.11	11.08	11.47	0
		90	99	10.09	9.91	10.06	10.05	10.44	1
		180	0	10.13	9.99	10.12	10.01	10.44	1
70M	DFT-S 16QAM	1	1	10.14	9.93	10.05	9.99	10.36	1
70M	DFT-S 64QAM	1	1	8.69	8.43	8.63	8.56	8.93	2.5
70M	DFT-S 256QAM	1	1	6.66	6.45	6.65	6.56	6.95	4.5
70M	CP QPSK	1	1	9.67	9.54	9.61	9.57	10.02	1.5

NR Conducted Power_ENDC_Laptop_Ant 0									
NR Band 77									
BW	MCS Index	Channel		648668	652334	656000	659666	663332	3GPP MPR
		Frequency (MHz)		3730.02	3785.01	3840	3894.99	3949.98	
60M	DFT-S PI/2 BPSK	1	1	11.12	10.91	11.10	11.03	11.44	0
60M	DFT-S QPSK	1	1	11.17	10.95	11.08	11.03	11.40	0
		1	81	11.08	10.89	11.04	11.05	11.34	0
		1	160	11.05	10.96	11.04	10.97	11.33	0
		81	0	10.13	10.02	10.10	10.10	10.41	1
		81	41	11.16	10.96	11.13	11.02	11.47	0
		81	81	10.10	9.92	10.03	10.03	10.36	1
		162	0	10.19	9.96	10.08	10.10	10.47	1
60M	DFT-S 16QAM	1	1	10.16	9.96	10.10	9.96	10.35	1
60M	DFT-S 64QAM	1	1	8.66	8.47	8.58	8.55	8.91	2.5
60M	DFT-S 256QAM	1	1	6.66	6.49	6.55	6.53	6.94	4.5
60M	CP QPSK	1	1	9.68	9.53	9.66	9.62	9.97	1.5
BW	MCS Index	Channel		648334	652166	656000	659834	663666	3GPP MPR
		Frequency (MHz)		3725.01	3782.49	3840	3897.51	3954.99	
50M	DFT-S PI/2 BPSK	1	1	11.09	10.97	11.11	11.02	11.36	0
50M	DFT-S QPSK	1	1	11.20	10.98	11.15	11.11	11.46	0
		1	67	11.14	10.91	11.07	10.95	11.41	0
		1	131	11.13	10.94	11.01	10.96	11.41	0
		64	0	10.19	9.99	10.08	10.06	10.38	1
		64	35	11.13	10.95	11.10	10.99	11.46	0
		64	69	10.10	9.96	10.09	10.01	10.38	1
		128	0	10.17	10.03	10.09	10.08	10.46	1
50M	DFT-S 16QAM	1	1	10.14	9.98	10.05	10.03	10.41	1
50M	DFT-S 64QAM	1	1	8.61	8.43	8.62	8.57	8.95	2.5
50M	DFT-S 256QAM	1	1	6.64	6.43	6.64	6.50	6.88	4.5
50M	CP QPSK	1	1	9.73	9.52	9.63	9.64	10.00	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 77

BW	MCS Index	Channel		648000	652000	656000	660000	664000	3GPP MPR
		Frequency (MHz)		3720	3780	3840	3900	3960	
40M	DFT-S PI/2 BPSK	1	1	11.17	10.99	11.13	11.08	11.40	0
40M	DFT-S QPSK	1	1	11.14	11.03	11.08	11.09	11.43	0
		1	53	11.10	10.95	11.08	11.01	11.40	0
		1	104	11.07	10.88	11.04	11.02	11.37	0
		50	0	10.20	9.93	10.10	10.04	10.45	1
		50	28	11.16	10.99	11.08	11.02	11.46	0
		50	56	10.18	9.96	10.06	9.98	10.45	1
		100	0	10.14	10.01	10.06	10.07	10.39	1
40M	DFT-S 16QAM	1	1	10.13	9.97	10.04	10.00	10.37	1
40M	DFT-S 64QAM	1	1	8.67	8.47	8.58	8.59	8.89	2.5
40M	DFT-S 256QAM	1	1	6.70	6.51	6.64	6.50	6.88	4.5
40M	CP QPSK	1	1	9.66	9.52	9.67	9.60	9.95	1.5
BW	MCS Index	Channel		647668	651834	656000	660166	664332	3GPP MPR
		Frequency (MHz)		3715.02	3777.51	3840	3902.49	3964.98	
30M	DFT-S PI/2 BPSK	1	1	11.19	10.93	11.11	11.08	11.40	0
30M	DFT-S QPSK	1	1	11.17	11.04	11.16	11.09	11.48	0
		1	39	11.13	10.88	11.02	11.03	11.34	0
		1	76	11.12	10.97	11.05	10.94	11.37	0
		36	0	10.19	10.03	10.08	10.07	10.43	1
		36	21	11.10	10.97	11.07	11.01	11.39	0
		36	42	10.15	9.92	10.03	10.03	10.46	1
		75	0	10.18	9.95	10.07	10.08	10.41	1
30M	DFT-S 16QAM	1	1	10.13	9.97	10.00	9.96	10.42	1
30M	DFT-S 64QAM	1	1	8.68	8.50	8.63	8.49	8.94	2.5
30M	DFT-S 256QAM	1	1	6.71	6.45	6.65	6.52	6.96	4.5
30M	CP QPSK	1	1	9.74	9.57	9.66	9.59	9.95	1.5

NR Conducted Power_ENDC_Laptop_Ant 0									
NR Band 77									
BW	MCS Index	Channel		647500	651750	656000	660250	664500	3GPP MPR
		Frequency (MHz)		3712.5	3776.25	3840	3903.75	3967.5	
25M	DFT-S PI/2 BPSK	1	1	11.10	10.93	11.13	11.04	11.42	0
25M	DFT-S QPSK	1	1	11.21	10.96	11.12	11.10	11.45	0
		1	33	11.15	10.95	11.07	10.96	11.35	0
		1	63	11.07	10.88	11.05	10.97	11.38	0
		32	0	10.17	9.93	10.13	10.09	10.46	1
		32	17	11.13	10.98	11.08	11.03	11.42	0
		32	33	10.19	9.98	10.09	10.07	10.38	1
		64	0	10.13	9.95	10.16	10.10	10.47	1
25M	DFT-S 16QAM	1	1	10.16	9.89	10.00	10.03	10.33	1
25M	DFT-S 64QAM	1	1	8.66	8.43	8.62	8.56	8.88	2.5
25M	DFT-S 256QAM	1	1	6.67	6.46	6.64	6.56	6.91	4.5
25M	CP QPSK	1	1	9.74	9.51	9.59	9.56	9.93	1.5
BW	MCS Index	Channel		647334	651666	656000	660266	664666	3GPP MPR
		Frequency (MHz)		3710.01	3774.99	3840	3903.99	3969.99	
20M	DFT-S PI/2 BPSK	1	1	11.12	10.94	11.05	11.03	11.37	0
20M	DFT-S QPSK	1	1	11.15	10.96	11.07	11.09	11.42	0
		1	26	11.13	10.95	11.06	10.99	11.35	0
		1	49	11.09	10.95	11.01	10.97	11.37	0
		25	0	10.14	9.99	10.05	10.01	10.45	1
		25	13	11.12	10.95	11.06	11.03	11.41	0
		25	26	10.17	9.93	10.05	9.99	10.44	1
		50	0	10.17	9.97	10.12	10.10	10.48	1
20M	DFT-S 16QAM	1	1	10.11	9.90	10.00	9.98	10.36	1
20M	DFT-S 64QAM	1	1	8.63	8.48	8.55	8.51	8.89	2.5
20M	DFT-S 256QAM	1	1	6.64	6.52	6.60	6.53	6.91	4.5
20M	CP QPSK	1	1	9.66	9.57	9.59	9.61	9.99	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 77

BW	MCS Index	Channel		647168	651584	656000	660416	664832	3GPP MPR
		Frequency (MHz)		3707.52	3773.76	3840	3906.24	3972.48	
15M	DFT-S PI/2 BPSK	1	1	11.12	10.93	11.08	11.02	11.43	0
15M	DFT-S QPSK	1	1	11.15	10.94	11.10	11.01	11.41	0
		1	19	11.09	10.90	11.03	10.96	11.37	0
		1	36	11.10	10.92	11.05	10.96	11.33	0
		18	0	10.20	9.94	10.07	10.07	10.46	1
		18	10	11.15	11.01	11.14	11.07	11.41	0
		18	20	10.09	9.98	10.07	10.00	10.40	1
		36	0	10.19	9.99	10.08	10.10	10.43	1
15M	DFT-S 16QAM	1	1	10.15	9.95	10.07	10.05	10.41	1
15M	DFT-S 64QAM	1	1	8.67	8.42	8.62	8.52	8.92	2.5
15M	DFT-S 256QAM	1	1	6.64	6.45	6.63	6.51	6.96	4.5
15M	CP QPSK	1	1	9.65	9.55	9.69	9.60	9.95	1.5
BW	MCS Index	Channel		647000	651500	656000	660500	665000	3GPP MPR
		Frequency (MHz)		3705	3772.5	3840	3907.5	3975	
10M	DFT-S PI/2 BPSK	1	1	11.14	10.96	11.09	11.06	11.39	0
10M	DFT-S QPSK	1	1	11.17	10.96	11.16	11.11	11.41	0
		1	11	11.13	10.92	11.05	10.99	11.37	0
		1	22	11.10	10.93	11.07	10.97	11.35	0
		12	0	10.16	9.98	10.11	10.10	10.45	1
		12	6	11.18	10.95	11.11	11.02	11.37	0
		12	12	10.10	9.94	10.08	10.08	10.36	1
		24	0	10.18	10.03	10.13	10.11	10.46	1
10M	DFT-S 16QAM	1	1	10.11	9.91	10.00	10.01	10.39	1
10M	DFT-S 64QAM	1	1	8.65	8.43	8.59	8.49	8.97	2.5
10M	DFT-S 256QAM	1	1	6.66	6.48	6.58	6.60	6.93	4.5
10M	CP QPSK	1	1	9.71	9.48	9.64	9.58	9.93	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 78

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		12.44		0
100M	DFT-S QPSK	1	1		12.48		0
		1	137		12.41		0
		1	271		12.42		0
		135	0		11.44		1
		135	69		12.45		0
		135	138		11.41		1
		270	0		11.45		1
100M	DFT-S 16QAM	1	1		11.38		1
100M	DFT-S 64QAM	1	1		9.95		2.5
100M	DFT-S 256QAM	1	1		7.90		4.5
100M	CP QPSK	1	1		11.01		1.5
BW	MCS Index	Channel		649668	650000	650332	3GPP MPR
		Frequency (MHz)		3745.02	3750	3754.98	
90M	DFT-S PI/2 BPSK	1	1	12.36	12.38	12.41	0
90M	DFT-S QPSK	1	1	12.41	12.44	12.38	0
		1	123	12.31	12.34	12.38	0
		1	243	12.28	12.40	12.36	0
		120	0	11.35	11.34	11.33	1
		120	63	12.33	12.35	12.42	0
		120	125	11.27	11.31	11.29	1
		243	0	11.38	11.45	11.42	1
90M	DFT-S 16QAM	1	1	11.24	11.32	11.28	1
90M	DFT-S 64QAM	1	1	9.89	9.93	9.86	2.5
90M	DFT-S 256QAM	1	1	7.75	7.83	7.87	4.5
90M	CP QPSK	1	1	10.92	10.99	10.89	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 78

BW	MCS Index	Channel		649334	650000	650666	3GPP MPR
		Frequency (MHz)		3740.01	3750	3759.99	
80M	DFT-S PI/2 BPSK	1	1	12.34	12.42	12.36	0
80M	DFT-S QPSK	1	1	12.33	12.47	12.39	0
		1	109	12.26	12.41	12.30	0
		1	215	12.35	12.38	12.39	0
		108	0	11.28	11.42	11.34	1
		108	55	12.33	12.38	12.33	0
		108	109	11.32	11.35	11.37	1
		216	0	11.37	11.38	11.38	1
80M	DFT-S 16QAM	1	1	11.26	11.36	11.32	1
80M	DFT-S 64QAM	1	1	9.82	9.86	9.89	2.5
80M	DFT-S 256QAM	1	1	7.79	7.80	7.83	4.5
80M	CP QPSK	1	1	10.88	11.01	10.94	1.5
BW	MCS Index	Channel		649000	650000	651000	3GPP MPR
		Frequency (MHz)		3735	3750	3765	
70M	DFT-S PI/2 BPSK	1	1	12.35	12.39	12.38	0
70M	DFT-S QPSK	1	1	12.39	12.43	12.36	0
		1	95	12.32	12.36	12.33	0
		1	187	12.28	12.32	12.37	0
		90	0	11.28	11.32	11.34	1
		90	50	12.39	12.43	12.35	0
		90	99	11.32	11.36	11.32	1
		180	0	11.31	11.35	11.32	1
70M	DFT-S 16QAM	1	1	11.31	11.35	11.35	1
70M	DFT-S 64QAM	1	1	9.83	9.87	9.87	2.5
70M	DFT-S 256QAM	1	1	7.75	7.79	7.81	4.5
70M	CP QPSK	1	1	10.86	10.90	10.98	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 78

BW	MCS Index	Channel		648668	650000	651332	3GPP MPR
		Frequency (MHz)		3730.02	3750	3769.98	
60M	DFT-S PI/2 BPSK	1	1	12.37	12.34	12.36	0
60M	DFT-S QPSK	1	1	12.33	12.41	12.43	0
		1	81	12.29	12.37	12.33	0
		1	160	12.32	12.41	12.35	0
		81	0	11.30	11.42	11.34	1
		81	41	12.31	12.42	12.40	0
		81	81	11.26	11.38	11.28	1
		162	0	11.33	11.35	11.42	1
60M	DFT-S 16QAM	1	1	11.28	11.33	11.29	1
60M	DFT-S 64QAM	1	1	9.87	9.90	9.89	2.5
60M	DFT-S 256QAM	1	1	7.84	7.89	7.81	4.5
60M	CP QPSK	1	1	10.90	10.97	10.91	1.5
BW	MCS Index	Channel		648334	650000	651666	3GPP MPR
		Frequency (MHz)		3725.01	3750	3774.99	
50M	DFT-S PI/2 BPSK	1	1	12.30	12.37	12.31	0
50M	DFT-S QPSK	1	1	12.32	12.47	12.39	0
		1	67	12.33	12.39	12.28	0
		1	131	12.26	12.42	12.31	0
		64	0	11.36	11.35	11.38	1
		64	35	12.35	12.36	12.39	0
		64	69	11.28	11.34	11.32	1
		128	0	11.31	11.41	11.34	1
50M	DFT-S 16QAM	1	1	11.29	11.33	11.28	1
50M	DFT-S 64QAM	1	1	9.79	9.91	9.86	2.5
50M	DFT-S 256QAM	1	1	7.81	7.89	7.84	4.5
50M	CP QPSK	1	1	10.95	10.96	10.95	1.5

NR Conducted Power_ENDC_Laptop_Ant 0							
NR Band 78							
BW	MCS Index	Channel		648000	650000	652000	3GPP MPR
		Frequency (MHz)		3720	3750	3780	
40M	DFT-S PI/2 BPSK	1	1	12.37	12.35	12.35	0
40M	DFT-S QPSK	1	1	12.41	12.47	12.43	0
		1	53	12.26	12.37	12.30	0
		1	104	12.34	12.38	12.37	0
		50	0	11.36	11.35	11.34	1
		50	28	12.37	12.37	12.41	0
		50	56	11.32	11.36	11.38	1
		100	0	11.38	11.36	11.34	1
40M	DFT-S 16QAM	1	1	11.30	11.31	11.31	1
40M	DFT-S 64QAM	1	1	9.80	9.87	9.86	2.5
40M	DFT-S 256QAM	1	1	7.81	7.84	7.83	4.5
40M	CP QPSK	1	1	10.89	11.01	10.97	1.5
BW	MCS Index	Channel		647668	650000	652332	3GPP MPR
		Frequency (MHz)		3715.02	3750	3784.98	
30M	DFT-S PI/2 BPSK	1	1	12.35	12.39	12.40	0
30M	DFT-S QPSK	1	1	12.42	12.42	12.42	0
		1	39	12.31	12.34	12.30	0
		1	76	12.26	12.32	12.35	0
		36	0	11.37	11.36	11.35	1
		36	21	12.39	12.41	12.39	0
		36	42	11.31	11.34	11.38	1
		75	0	11.35	11.44	11.37	1
30M	DFT-S 16QAM	1	1	11.25	11.33	11.34	1
30M	DFT-S 64QAM	1	1	9.88	9.85	9.83	2.5
30M	DFT-S 256QAM	1	1	7.76	7.84	7.77	4.5
30M	CP QPSK	1	1	10.95	10.91	10.91	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 78

BW	MCS Index	Channel		647500	650000	652500	3GPP MPR
		Frequency (MHz)		3712.5	3750	3787.5	
25M	DFT-S PI/2 BPSK	1	1	12.34	12.41	12.33	0
25M	DFT-S QPSK	1	1	12.37	12.42	12.42	0
		1	33	12.31	12.40	12.35	0
		1	63	12.33	12.35	12.31	0
		32	0	11.32	11.43	11.34	1
		32	17	12.32	12.45	12.42	0
		32	33	11.33	11.34	11.33	1
		64	0	11.30	11.38	11.40	1
25M	DFT-S 16QAM	1	1	11.28	11.29	11.35	1
25M	DFT-S 64QAM	1	1	9.86	9.85	9.86	2.5
25M	DFT-S 256QAM	1	1	7.81	7.87	7.80	4.5
25M	CP QPSK	1	1	10.88	10.93	10.97	1.5
BW	MCS Index	Channel		647334	650000	652666	3GPP MPR
		Frequency (MHz)		3710.01	3750	3789.99	
20M	DFT-S PI/2 BPSK	1	1	12.35	12.40	12.31	0
20M	DFT-S QPSK	1	1	12.38	12.40	12.36	0
		1	26	12.29	12.39	12.32	0
		1	49	12.33	12.37	12.29	0
		25	0	11.29	11.44	11.33	1
		25	13	12.31	12.38	12.34	0
		25	26	11.33	11.35	11.33	1
		50	0	11.36	11.37	11.42	1
20M	DFT-S 16QAM	1	1	11.25	11.37	11.29	1
20M	DFT-S 64QAM	1	1	9.89	9.89	9.86	2.5
20M	DFT-S 256QAM	1	1	7.77	7.80	7.77	4.5
20M	CP QPSK	1	1	10.95	11.01	10.88	1.5

NR Conducted Power_ENDC_Laptop_Ant 0

NR Band 78

BW	MCS Index	Channel		647168	650000	652832	3GPP MPR
		Frequency (MHz)		3707.52	3750	3792.48	
15M	DFT-S PI/2 BPSK	1	1	12.33	12.40	12.39	0
15M	DFT-S QPSK	1	1	12.40	12.44	12.43	0
		1	19	12.35	12.40	12.29	0
		1	36	12.26	12.32	12.29	0
		18	0	11.32	11.40	11.41	1
		18	10	12.36	12.45	12.34	0
		18	20	11.33	11.35	11.37	1
		36	0	11.33	11.44	11.42	1
15M	DFT-S 16QAM	1	1	11.31	11.38	11.28	1
15M	DFT-S 64QAM	1	1	9.86	9.85	9.82	2.5
15M	DFT-S 256QAM	1	1	7.83	7.90	7.83	4.5
15M	CP QPSK	1	1	10.90	10.95	10.97	1.5
BW	MCS Index	Channel		647000	650000	653000	3GPP MPR
		Frequency (MHz)		3705	3750	3795	
10M	DFT-S PI/2 BPSK	1	1	12.36	12.37	12.32	0
10M	DFT-S QPSK	1	1	12.37	12.39	12.38	0
		1	11	12.32	12.37	12.34	0
		1	22	12.27	12.38	12.32	0
		12	0	11.32	11.38	11.38	1
		12	6	12.36	12.36	12.40	0
		12	12	11.31	11.35	11.29	1
		24	0	11.31	11.45	11.32	1
10M	DFT-S 16QAM	1	1	11.28	11.28	11.27	1
10M	DFT-S 64QAM	1	1	9.81	9.92	9.91	2.5
10M	DFT-S 256QAM	1	1	7.74	7.84	7.84	4.5
10M	CP QPSK	1	1	10.86	10.91	10.90	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 2

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	15.85	15.88	15.95	0
20M	DFT-S QPSK	1	1	15.89	15.92	15.99	0
		1	53	15.87	15.90	15.97	0
		1	104	15.84	15.87	15.94	0
		50	0	14.82	14.85	14.92	1
		50	28	15.79	15.82	15.89	0
		50	56	14.76	14.79	14.86	1
		100	0	14.75	14.78	14.85	1
20M	DFT-S 16QAM	1	1	14.72	14.75	14.82	1
20M	DFT-S 64QAM	1	1	13.35	13.38	13.45	2.5
20M	DFT-S 256QAM	1	1	11.31	11.34	11.41	4.5
20M	CP QPSK	1	1	14.33	14.36	14.43	1.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	15.83	15.82	15.92	0
15M	DFT-S QPSK	1	1	15.81	15.87	15.92	0
		1	40	15.77	15.82	15.95	0
		1	77	15.76	15.81	15.91	0
		36	0	14.74	14.76	14.87	1
		36	22	15.70	15.81	15.81	0
		36	43	14.68	14.75	14.84	1
		75	0	14.71	14.68	14.82	1
15M	DFT-S 16QAM	1	1	14.63	14.70	14.74	1
15M	DFT-S 64QAM	1	1	13.27	13.32	13.42	2.5
15M	DFT-S 256QAM	1	1	11.25	11.34	11.35	4.5
15M	CP QPSK	1	1	14.23	14.33	14.39	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 2

BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	15.77	15.70	15.80	0
10M	DFT-S QPSK	1	1	15.81	15.73	15.80	0
		1	26	15.69	15.74	15.91	0
		1	50	15.67	15.72	15.84	0
		25	0	14.70	14.66	14.84	1
		25	14	15.68	15.80	15.68	0
		25	27	14.67	14.74	14.71	1
		50	0	14.71	14.58	14.79	1
10M	DFT-S 16QAM	1	1	14.63	14.63	14.65	1
10M	DFT-S 64QAM	1	1	13.22	13.28	13.30	2.5
10M	DFT-S 256QAM	1	1	11.20	11.30	11.22	4.5
10M	CP QPSK	1	1	14.23	14.21	14.34	1.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	15.71	15.74	15.66	0
5M	DFT-S QPSK	1	1	15.67	15.75	15.73	0
		1	13	15.73	15.80	15.85	0
		1	23	15.65	15.76	15.79	0
		12	0	14.65	14.71	14.78	1
		12	7	15.67	15.80	15.62	0
		12	13	14.53	14.62	14.62	1
		25	0	14.63	14.64	14.75	1
5M	DFT-S 16QAM	1	1	14.58	14.67	14.60	1
5M	DFT-S 64QAM	1	1	13.15	13.19	13.40	2.5
5M	DFT-S 256QAM	1	1	11.25	11.23	11.28	4.5
5M	CP QPSK	1	1	14.08	14.29	14.27	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 7

BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	15.85	15.92	16.38	0
20M	DFT-S QPSK	1	1	15.89	15.96	16.42	0
		1	53	15.84	15.91	16.37	0
		1	104	15.82	15.89	16.35	0
		50	0	14.88	14.95	15.41	1
		50	28	15.85	15.92	16.38	0
		50	56	14.86	14.93	15.39	1
		100	0	14.82	14.89	15.35	1
20M	DFT-S 16QAM	1	1	14.80	14.87	15.33	1
20M	DFT-S 64QAM	1	1	13.32	13.39	13.85	2.5
20M	DFT-S 256QAM	1	1	11.30	11.37	11.83	4.5
20M	CP QPSK	1	1	14.33	14.40	14.86	1.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	15.84	15.83	16.33	0
15M	DFT-S QPSK	1	1	15.81	15.87	16.39	0
		1	40	15.84	15.87	16.37	0
		1	77	15.78	15.81	16.30	0
		36	0	14.80	14.91	15.39	1
		36	22	15.79	15.82	16.33	0
		36	43	14.82	14.93	15.38	1
		75	0	14.80	14.81	15.25	1
15M	DFT-S 16QAM	1	1	14.70	14.80	15.28	1
15M	DFT-S 64QAM	1	1	13.24	13.30	13.75	2.5
15M	DFT-S 256QAM	1	1	11.29	11.28	11.74	4.5
15M	CP QPSK	1	1	14.23	14.39	14.82	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 7

BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	15.80	15.74	16.30	0
10M	DFT-S QPSK	1	1	15.80	15.79	16.36	0
		1	26	15.69	15.85	16.31	0
		1	50	15.67	15.81	16.23	0
		25	0	14.66	14.88	15.26	1
		25	14	15.75	15.71	16.26	0
		25	27	14.70	14.85	15.29	1
		50	0	14.77	14.67	15.25	1
10M	DFT-S 16QAM	1	1	14.69	14.67	15.25	1
10M	DFT-S 64QAM	1	1	13.23	13.23	13.67	2.5
10M	DFT-S 256QAM	1	1	11.21	11.14	11.59	4.5
10M	CP QPSK	1	1	14.18	14.28	14.68	1.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	15.74	15.74	16.26	0
5M	DFT-S QPSK	1	1	15.67	15.73	16.21	0
		1	13	15.81	15.72	16.16	0
		1	23	15.70	15.68	16.21	0
		12	0	14.73	14.81	15.23	1
		12	7	15.74	15.68	16.11	0
		12	13	14.74	14.86	15.14	1
		25	0	14.79	14.79	15.24	1
5M	DFT-S 16QAM	1	1	14.68	14.78	15.22	1
5M	DFT-S 64QAM	1	1	13.13	13.29	13.62	2.5
5M	DFT-S 256QAM	1	1	11.18	11.19	11.71	4.5
5M	CP QPSK	1	1	14.15	14.29	14.70	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 25

BW	MCS Index	Channel		372000	376500	381000	3GPP MPR
		Frequency (MHz)		1860	1882.5	1905	
20M	DFT-S PI/2 BPSK	1	1	15.80	15.84	15.94	0
20M	DFT-S QPSK	1	1	15.85	15.89	15.99	0
		1	53	15.81	15.85	15.95	0
		1	104	15.79	15.83	15.93	0
		50	0	14.81	14.85	14.95	1
		50	28	15.77	15.81	15.91	0
		50	56	14.78	14.82	14.92	1
		100	0	14.77	14.81	14.91	1
20M	DFT-S 16QAM	1	1	14.75	14.79	14.89	1
20M	DFT-S 64QAM	1	1	13.27	13.31	13.41	2.5
20M	DFT-S 256QAM	1	1	11.25	11.29	11.39	4.5
20M	CP QPSK	1	1	14.28	14.32	14.42	1.5
BW	MCS Index	Channel		371500	376500	381500	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	DFT-S PI/2 BPSK	1	1	15.70	15.79	15.90	0
15M	DFT-S QPSK	1	1	15.78	15.89	15.91	0
		1	40	15.80	15.83	15.89	0
		1	77	15.75	15.83	15.84	0
		36	0	14.75	14.75	14.93	1
		36	22	15.68	15.75	15.83	0
		36	43	14.69	14.72	14.85	1
		75	0	14.67	14.75	14.82	1
15M	DFT-S 16QAM	1	1	14.75	14.74	14.81	1
15M	DFT-S 64QAM	1	1	13.17	13.30	13.31	2.5
15M	DFT-S 256QAM	1	1	11.22	11.27	11.29	4.5
15M	CP QPSK	1	1	14.19	14.24	14.32	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 25

BW	MCS Index	Channel		371000	376500	382000	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	DFT-S PI/2 BPSK	1	1	15.67	15.66	15.80	0
10M	DFT-S QPSK	1	1	15.63	15.78	15.87	0
		1	26	15.71	15.71	15.84	0
		1	50	15.69	15.78	15.70	0
		25	0	14.67	14.69	14.92	1
		25	14	15.58	15.64	15.80	0
		25	27	14.63	14.61	14.72	1
		50	0	14.56	14.66	14.73	1
10M	DFT-S 16QAM	1	1	14.61	14.59	14.79	1
10M	DFT-S 64QAM	1	1	13.08	13.18	13.30	2.5
10M	DFT-S 256QAM	1	1	11.20	11.20	11.26	4.5
10M	CP QPSK	1	1	14.17	14.15	14.24	1.5
BW	MCS Index	Channel		370500	376500	382500	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	DFT-S PI/2 BPSK	1	1	15.67	15.66	15.75	0
5M	DFT-S QPSK	1	1	15.78	15.79	15.81	0
		1	13	15.78	15.77	15.79	0
		1	23	15.64	15.76	15.55	0
		12	0	14.72	14.66	14.80	1
		12	7	15.63	15.72	15.73	0
		12	13	14.57	14.70	14.60	1
		25	0	14.60	14.62	14.76	1
5M	DFT-S 16QAM	1	1	14.61	14.65	14.70	1
5M	DFT-S 64QAM	1	1	13.02	13.22	13.23	2.5
5M	DFT-S 256QAM	1	1	11.08	11.17	11.16	4.5
5M	CP QPSK	1	1	14.05	14.19	14.17	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 30

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			462000		
		Frequency (MHz)			2310		
10M	DFT-S PI/2 BPSK	1	1		18.75		0
10M	DFT-S QPSK	1	1		18.78		0
		1	26		18.74		0
		1	50		18.71		0
		25	0		17.75		1
		25	14		18.76		0
		25	27		17.73		1
		50	0		17.69		1
10M	DFT-S 16QAM	1	1		17.65		1
10M	DFT-S 64QAM	1	1		16.22		2.5
10M	DFT-S 256QAM	1	1		14.19		4.5
10M	CP QPSK	1	1		17.24		1.5
BW	MCS Index	Channel		461500	462000	462500	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	DFT-S PI/2 BPSK	1	1	18.66	18.75	18.61	0
5M	DFT-S QPSK	1	1	18.64	18.76	18.65	0
		1	13	18.57	18.68	18.60	0
		1	23	18.55	18.67	18.61	0
		12	0	17.67	17.66	17.69	1
		12	7	18.69	18.72	18.71	0
		12	13	17.59	17.64	17.66	1
		25	0	17.59	17.68	17.62	1
5M	DFT-S 16QAM	1	1	17.58	17.56	17.52	1
5M	DFT-S 64QAM	1	1	16.05	16.22	16.11	2.5
5M	DFT-S 256QAM	1	1	14.09	14.15	14.12	4.5
5M	CP QPSK	1	1	17.08	17.17	17.19	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 66

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		346000	349000	352000	
		Frequency (MHz)		1730	1745	1760	
40M	DFT-S PI/2 BPSK	1	1	18.32	18.45	17.80	0
40M	DFT-S QPSK	1	1	18.34	18.47	17.82	0
		1	108	18.30	18.43	17.78	0
		1	214	18.28	18.41	17.76	0
		108	0	17.36	17.49	16.84	1
		108	54	18.26	18.39	17.74	0
		108	108	17.32	17.45	16.80	1
		216	0	17.31	17.44	16.79	1
40M	DFT-S 16QAM	1	1	17.28	17.41	16.76	1
40M	DFT-S 64QAM	1	1	15.79	15.92	15.27	2.5
40M	DFT-S 256QAM	1	1	13.80	13.93	13.28	4.5
40M	CP QPSK	1	1	16.76	16.89	16.24	1.5
BW	MCS Index	Channel		345000	349000	353000	3GPP MPR
		Frequency (MHz)		1725	1745	1765	
30M	DFT-S PI/2 BPSK	1	1	18.23	18.41	17.73	0
30M	DFT-S QPSK	1	1	18.33	18.41	17.76	0
		1	80	18.20	18.42	17.78	0
		1	158	18.23	18.34	17.68	0
		80	0	17.28	17.39	16.77	1
		80	40	18.20	18.34	17.73	0
		80	80	17.26	17.45	16.70	1
		160	0	17.24	17.38	16.78	1
30M	DFT-S 16QAM	1	1	17.20	17.31	16.67	1
30M	DFT-S 64QAM	1	1	15.78	15.83	15.24	2.5
30M	DFT-S 256QAM	1	1	13.79	13.88	13.18	4.5
30M	CP QPSK	1	1	16.74	16.87	16.17	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 66

BW	MCS Index	Channel		344500	349000	353500	3GPP MPR
		Frequency (MHz)		1722.5	1745	1767.5	
25M	DFT-S PI/2 BPSK	1	1	18.22	18.39	17.66	0
25M	DFT-S QPSK	1	1	18.22	18.36	17.73	0
		1	67	18.20	18.30	17.78	0
		1	131	18.12	18.25	17.56	0
		64	0	17.14	17.27	16.62	1
		64	35	18.09	18.33	17.60	0
		64	69	17.17	17.31	16.67	1
		128	0	17.24	17.31	16.69	1
25M	DFT-S 16QAM	1	1	17.13	17.18	16.59	1
25M	DFT-S 64QAM	1	1	15.72	15.68	15.18	2.5
25M	DFT-S 256QAM	1	1	13.65	13.78	13.15	4.5
25M	CP QPSK	1	1	16.70	16.72	16.11	1.5
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	18.17	18.28	17.51	0
20M	DFT-S QPSK	1	1	18.21	18.31	17.66	0
		1	53	18.09	18.30	17.67	0
		1	104	18.18	18.27	17.55	0
		50	0	17.19	17.32	16.53	1
		50	28	18.19	18.20	17.45	0
		50	56	17.22	17.39	16.64	1
		100	0	17.11	17.29	16.69	1
20M	DFT-S 16QAM	1	1	17.16	17.29	16.57	1
20M	DFT-S 64QAM	1	1	15.77	15.69	15.24	2.5
20M	DFT-S 256QAM	1	1	13.78	13.79	13.16	4.5
20M	CP QPSK	1	1	16.68	16.84	16.04	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 66

BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	18.14	18.33	17.58	0
15M	DFT-S QPSK	1	1	18.19	18.29	17.73	0
		1	40	18.12	18.39	17.72	0
		1	77	18.16	18.33	17.58	0
		36	0	17.14	17.34	16.64	1
		36	22	18.17	18.27	17.59	0
		36	43	17.19	17.37	16.65	1
		75	0	17.10	17.30	16.74	1
15M	DFT-S 16QAM	1	1	17.15	17.21	16.61	1
15M	DFT-S 64QAM	1	1	15.74	15.83	15.14	2.5
15M	DFT-S 256QAM	1	1	13.79	13.85	13.04	4.5
15M	CP QPSK	1	1	16.74	16.80	16.15	1.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	18.22	18.26	17.73	0
10M	DFT-S QPSK	1	1	18.20	18.37	17.71	0
		1	26	18.13	18.33	17.65	0
		1	50	18.15	18.32	17.61	0
		25	0	17.16	17.33	16.63	1
		25	14	18.20	18.19	17.68	0
		25	27	17.23	17.37	16.63	1
		50	0	17.24	17.24	16.72	1
10M	DFT-S 16QAM	1	1	17.11	17.28	16.64	1
10M	DFT-S 64QAM	1	1	15.66	15.70	15.13	2.5
10M	DFT-S 256QAM	1	1	13.74	13.77	13.07	4.5
10M	CP QPSK	1	1	16.72	16.73	16.09	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 66

BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	18.17	18.34	17.67	0
5M	DFT-S QPSK	1	1	18.25	18.26	17.77	0
		1	13	18.19	18.32	17.61	0
		1	23	18.23	18.35	17.63	0
		12	0	17.17	17.38	16.80	1
		12	7	18.13	18.28	17.54	0
		12	13	17.13	17.35	16.64	1
		25	0	17.22	17.37	16.63	1
5M	DFT-S 16QAM	1	1	17.17	17.28	16.71	1
5M	DFT-S 64QAM	1	1	15.72	15.78	15.10	2.5
5M	DFT-S 256QAM	1	1	13.67	13.79	13.12	4.5
5M	CP QPSK	1	1	16.68	16.79	16.02	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 38

BW	MCS Index	Channel		516000	519000	522000	3GPP MPR
		Frequency (MHz)		2580	2595	2610	
20M	DFT-S PI/2 BPSK	1	1	16.42	16.30	16.35	0
20M	DFT-S QPSK	1	1	16.45	16.32	16.37	0
		1	26	16.39	16.27	16.32	0
		1	49	16.36	16.24	16.29	0
		25	0	15.42	15.30	15.35	1
		25	13	16.42	16.30	16.35	0
		25	26	15.38	15.26	15.31	1
		50	0	15.35	15.23	15.28	1
20M	DFT-S 16QAM	1	1	15.33	15.21	15.26	1
20M	DFT-S 64QAM	1	1	13.89	13.77	13.82	2.5
20M	DFT-S 256QAM	1	1	11.85	11.73	11.78	4.5
20M	CP QPSK	1	1	14.92	14.80	14.85	1.5
BW	MCS Index	Channel		515500	519000	522500	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	DFT-S PI/2 BPSK	1	1	16.34	16.22	16.35	0
15M	DFT-S QPSK	1	1	16.44	16.24	16.36	0
		1	19	16.30	16.19	16.22	0
		1	36	16.35	16.24	16.28	0
		18	0	15.40	15.30	15.34	1
		18	10	16.33	16.22	16.27	0
		18	20	15.35	15.21	15.22	1
		36	0	15.27	15.14	15.28	1
15M	DFT-S 16QAM	1	1	15.33	15.20	15.24	1
15M	DFT-S 64QAM	1	1	13.87	13.72	13.81	2.5
15M	DFT-S 256QAM	1	1	11.76	11.71	11.72	4.5
15M	CP QPSK	1	1	14.86	14.75	14.84	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 38

BW	MCS Index	Channel		515000	519000	523000	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	DFT-S PI/2 BPSK	1	1	16.30	16.21	16.26	0
10M	DFT-S QPSK	1	1	16.36	16.15	16.27	0
		1	11	16.25	16.18	16.11	0
		1	22	16.28	16.20	16.17	0
		12	0	15.26	15.19	15.22	1
		12	6	16.18	16.07	16.17	0
		12	12	15.25	15.06	15.10	1
		24	0	15.18	15.13	15.19	1
10M	DFT-S 16QAM	1	1	15.20	15.12	15.18	1
10M	DFT-S 64QAM	1	1	13.82	13.61	13.74	2.5
10M	DFT-S 256QAM	1	1	11.72	11.60	11.65	4.5
10M	CP QPSK	1	1	14.86	14.71	14.70	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 41

BW	MCS Index	Channel		507204	509304	518598	500298	529998	3GPP MPR
		Frequency (MHz)		2536.02	2546.52	2592.99	2621.49	2649.99	
80M	DFT-S PI/2 BPSK	1	1	21.67	21.91	21.73	21.89	21.82	0
80M	DFT-S QPSK	1	1	21.71	21.95	21.77	21.93	21.86	0
		1	109	21.68	21.92	21.74	21.90	21.83	0
		1	215	21.64	21.88	21.70	21.86	21.79	0
		108	0	20.65	20.89	20.71	20.87	20.80	1
		108	55	21.69	21.93	21.75	21.91	21.84	0
		108	109	20.62	20.86	20.68	20.84	20.77	1
		216	0	20.61	20.85	20.67	20.83	20.76	1
80M	DFT-S 16QAM	1	1	20.57	20.81	20.63	20.79	20.72	1
80M	DFT-S 64QAM	1	1	19.18	19.42	19.24	19.40	19.33	2.5
80M	DFT-S 256QAM	1	1	17.19	17.43	17.25	17.41	17.34	4.5
80M	CP QPSK	1	1	20.14	20.38	20.20	20.36	20.29	1.5
BW	MCS Index	Channel		506202	512400	518598	524802	531000	3GPP MPR
		Frequency (MHz)		2531.01	2562	2592.99	2624.01	2655	
70M	DFT-S PI/2 BPSK	1	1	21.65	21.86	21.69	21.81	21.77	0
70M	DFT-S QPSK	1	1	21.63	21.94	21.76	21.83	21.80	0
		1	95	21.58	21.88	21.65	21.84	21.76	0
		1	187	21.60	21.79	21.65	21.86	21.77	0
		90	0	20.58	20.81	20.70	20.79	20.72	1
		90	50	21.63	21.87	21.71	21.81	21.75	0
		90	99	20.54	20.79	20.67	20.76	20.70	1
		180	0	20.54	20.84	20.60	20.73	20.75	1
70M	DFT-S 16QAM	1	1	20.56	20.78	20.57	20.76	20.65	1
70M	DFT-S 64QAM	1	1	19.16	19.39	19.19	19.33	19.29	2.5
70M	DFT-S 256QAM	1	1	17.11	17.37	17.24	17.31	17.30	4.5
70M	CP QPSK	1	1	20.04	20.36	20.19	20.33	20.29	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 41

BW	MCS Index	Channel		505200	511896	518598	525294	531996	3GPP MPR
		Frequency (MHz)		2526	2559.48	2592.99	2626.48	2659.98	
60M	DFT-S PI/2 BPSK	1	1	21.61	21.86	21.59	21.73	21.73	0
60M	DFT-S QPSK	1	1	21.55	21.87	21.70	21.73	21.72	0
		1	81	21.44	21.87	21.61	21.79	21.76	0
		1	160	21.49	21.76	21.57	21.83	21.69	0
		81	0	20.44	20.80	20.70	20.78	20.70	1
		81	41	21.62	21.83	21.71	21.80	21.68	0
		81	81	20.45	20.65	20.62	20.75	20.62	1
		162	0	20.50	20.75	20.56	20.68	20.74	1
60M	DFT-S 16QAM	1	1	20.54	20.73	20.53	20.72	20.55	1
60M	DFT-S 64QAM	1	1	19.08	19.35	19.14	19.23	19.25	2.5
60M	DFT-S 256QAM	1	1	17.02	17.33	17.15	17.26	17.23	4.5
60M	CP QPSK	1	1	19.94	20.22	20.14	20.32	20.23	1.5
BW	MCS Index	Channel		504204	511404	518598	525798	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.02	2592.99	2628.99	2664.99	
50M	DFT-S PI/2 BPSK	1	1	21.59	21.84	21.49	21.68	21.67	0
50M	DFT-S QPSK	1	1	21.50	21.94	21.67	21.66	21.63	0
		1	67	21.58	21.80	21.56	21.77	21.72	0
		1	131	21.57	21.68	21.54	21.82	21.61	0
		64	0	20.44	20.71	20.69	20.74	20.64	1
		64	35	21.53	21.76	21.68	21.79	21.62	0
		64	69	20.44	20.74	20.51	20.71	20.58	1
		128	0	20.43	20.84	20.57	20.66	20.70	1
50M	DFT-S 16QAM	1	1	20.41	20.75	20.47	20.66	20.55	1
50M	DFT-S 64QAM	1	1	19.05	19.38	19.07	19.17	19.23	2.5
50M	DFT-S 256QAM	1	1	17.02	17.31	17.13	17.20	17.21	4.5
50M	CP QPSK	1	1	20.02	20.25	20.14	20.23	20.20	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 41

BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	21.57	21.71	21.63	21.64	21.59	0
40M	DFT-S QPSK	1	1	21.60	21.89	21.65	21.61	21.59	0
		1	53	21.54	21.88	21.53	21.73	21.67	0
		1	104	21.53	21.68	21.62	21.75	21.52	0
		50	0	20.51	20.73	20.63	20.68	20.54	1
		50	28	21.50	21.77	21.69	21.69	21.62	0
		50	56	20.48	20.69	20.57	20.63	20.54	1
		100	0	20.42	20.70	20.45	20.58	20.62	1
40M	DFT-S 16QAM	1	1	20.45	20.74	20.55	20.57	20.48	1
40M	DFT-S 64QAM	1	1	19.01	19.27	19.17	19.15	19.17	2.5
40M	DFT-S 256QAM	1	1	17.04	17.27	17.12	17.13	17.11	4.5
40M	CP QPSK	1	1	20.01	20.34	20.12	20.13	20.12	1.5
BW	MCS Index	Channel		502200	510396	518598	526794	534996	3GPP MPR
		Frequency (MHz)		2511	2551.98	2592.99	2633.97	2674.98	
30M	DFT-S PI/2 BPSK	1	1	21.52	21.72	21.66	21.60	21.54	0
30M	DFT-S QPSK	1	1	21.51	21.81	21.68	21.57	21.57	0
		1	39	21.46	21.77	21.56	21.71	21.65	0
		1	76	21.47	21.79	21.56	21.72	21.47	0
		36	0	20.43	20.68	20.59	20.63	20.45	1
		36	21	21.57	21.78	21.61	21.64	21.56	0
		36	42	20.52	20.66	20.63	20.56	20.51	1
		75	0	20.40	20.70	20.45	20.57	20.62	1
30M	DFT-S 16QAM	1	1	20.52	20.69	20.54	20.55	20.38	1
30M	DFT-S 64QAM	1	1	19.03	19.37	19.18	19.08	19.11	2.5
30M	DFT-S 256QAM	1	1	17.07	17.33	17.23	17.03	17.07	4.5
30M	CP QPSK	1	1	19.93	20.28	20.14	20.11	20.12	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 41

BW	MCS Index	Channel		501204	509898	518598	527298	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.49	2592.99	2636.49	2679.99	
20M	DFT-S PI/2 BPSK	1	1	21.65	21.88	21.68	21.87	21.76	0
20M	DFT-S QPSK	1	1	21.69	21.93	21.69	21.90	21.83	0
		1	26	21.63	21.83	21.70	21.86	21.76	0
		1	49	21.55	21.79	21.63	21.81	21.71	0
		25	0	20.65	20.81	20.66	20.78	20.72	1
		25	13	21.61	21.84	21.71	21.84	21.77	0
		25	26	20.62	20.86	20.62	20.77	20.71	1
		50	0	20.55	20.77	20.60	20.79	20.73	1
20M	DFT-S 16QAM	1	1	20.50	20.73	20.56	20.76	20.63	1
20M	DFT-S 64QAM	1	1	19.13	19.32	19.19	19.33	19.28	2.5
20M	DFT-S 256QAM	1	1	17.13	17.34	17.21	17.41	17.26	4.5
20M	CP QPSK	1	1	20.11	20.32	20.15	20.35	20.25	1.5
BW	MCS Index	Channel		500700	509646	518598	527544	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.23	2592.99	2637.72	2682.48	
15M	DFT-S PI/2 BPSK	1	1	21.65	21.84	21.59	21.87	21.75	0
15M	DFT-S QPSK	1	1	21.66	21.91	21.64	21.90	21.79	0
		1	19	21.60	21.75	21.66	21.82	21.68	0
		1	36	21.52	21.75	21.50	21.81	21.64	0
		18	0	20.52	20.79	20.65	20.68	20.64	1
		18	10	21.60	21.71	21.68	21.79	21.73	0
		18	20	20.61	20.86	20.52	20.77	20.70	1
		36	0	20.42	20.67	20.54	20.76	20.69	1
15M	DFT-S 16QAM	1	1	20.35	20.72	20.55	20.72	20.61	1
15M	DFT-S 64QAM	1	1	19.01	19.19	19.04	19.28	19.24	2.5
15M	DFT-S 256QAM	1	1	17.02	17.23	17.09	17.40	17.23	4.5
15M	CP QPSK	1	1	20.04	20.28	20.09	20.34	20.20	1.5

NR Conducted Power_ENDC_Laptop_Ant 2									
NR Band 41									
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	21.58	21.75	21.46	21.79	21.69	0
10M	DFT-S QPSK	1	1	21.58	21.83	21.50	21.81	21.73	0
		1	11	21.62	21.74	21.58	21.72	21.66	0
		1	22	21.49	21.64	21.39	21.79	21.58	0
		12	0	20.56	20.73	20.57	20.59	20.63	1
		12	6	21.48	21.69	21.55	21.72	21.66	0
		12	12	20.53	20.79	20.44	20.73	20.65	1
		24	0	20.51	20.67	20.48	20.71	20.66	1
10M	DFT-S 16QAM	1	1	20.40	20.66	20.55	20.67	20.58	1
10M	DFT-S 64QAM	1	1	19.00	19.17	19.16	19.20	19.23	2.5
10M	DFT-S 256QAM	1	1	17.02	17.27	17.09	17.31	17.22	4.5
10M	CP QPSK	1	1	20.11	20.26	20.01	20.24	20.12	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		640000	641110	642222	643332	
		Frequency (MHz)		3600	3616.65	3633.33	3649.98	
100M	DFT-S PI/2 BPSK	1	1	17.77	17.85	17.70	17.74	0
100M	DFT-S QPSK	1	1	17.81	17.89	17.74	17.78	0
		1	137	17.75	17.83	17.68	17.72	0
		1	271	17.71	17.79	17.64	17.68	0
		135	0	16.77	16.85	16.70	16.74	1
		135	69	17.78	17.86	17.71	17.75	0
		135	138	16.75	16.83	16.68	16.72	1
		270	0	16.73	16.81	16.66	16.70	1
100M	DFT-S 16QAM	1	1	16.69	16.77	16.62	16.66	1
100M	DFT-S 64QAM	1	1	15.29	15.37	15.22	15.26	2.5
100M	DFT-S 256QAM	1	1	13.27	13.35	13.20	13.24	4.5
100M	CP QPSK	1	1	16.32	16.40	16.25	16.29	1.5
BW	MCS Index	Channel		639668	641000	642332	643666	3GPP MPR
		Frequency (MHz)		3595.02	3615	3634.98	3654.99	
90M	DFT-S PI/2 BPSK	1	1	17.71	17.78	17.69	17.71	0
90M	DFT-S QPSK	1	1	17.78	17.87	17.67	17.70	0
		1	123	17.70	17.82	17.68	17.68	0
		1	243	17.64	17.78	17.63	17.68	0
		120	0	16.71	16.75	16.64	16.72	1
		120	63	17.77	17.78	17.61	17.72	0
		120	125	16.72	16.77	16.63	16.72	1
		243	0	16.64	16.81	16.59	16.62	1
90M	DFT-S 16QAM	1	1	16.62	16.71	16.59	16.60	1
90M	DFT-S 64QAM	1	1	15.24	15.29	15.13	15.16	2.5
90M	DFT-S 256QAM	1	1	13.21	13.28	13.14	13.22	4.5
90M	CP QPSK	1	1	16.28	16.31	16.20	16.29	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 48

BW	MCS Index	Channel		639334	640888	642444	644000	3GPP MPR
		Frequency (MHz)		3590.01	3613.32	3636.66	3660	
80M	DFT-S PI/2 BPSK	1	1	17.58	17.78	17.68	17.67	0
80M	DFT-S QPSK	1	1	17.73	17.79	17.54	17.70	0
		1	109	17.64	17.73	17.62	17.59	0
		1	215	17.61	17.74	17.60	17.63	0
		108	0	16.70	16.74	16.64	16.68	1
		108	55	17.69	17.77	17.52	17.67	0
		108	109	16.71	16.62	16.50	16.67	1
		216	0	16.61	16.75	16.49	16.61	1
80M	DFT-S 16QAM	1	1	16.48	16.63	16.46	16.56	1
80M	DFT-S 64QAM	1	1	15.19	15.26	15.05	15.16	2.5
80M	DFT-S 256QAM	1	1	13.13	13.17	13.05	13.12	4.5
80M	CP QPSK	1	1	16.18	16.24	16.20	16.23	1.5
BW	MCS Index	Channel		639000	640778	642548	644332	3GPP MPR
		Frequency (MHz)		3585	3611.67	3638.22	3664.98	
70M	DFT-S PI/2 BPSK	1	1	17.71	17.65	17.62	17.61	0
70M	DFT-S QPSK	1	1	17.72	17.75	17.40	17.70	0
		1	95	17.62	17.72	17.55	17.53	0
		1	187	17.49	17.71	17.60	17.56	0
		90	0	16.64	16.73	16.64	16.64	1
		90	50	17.63	17.69	17.44	17.67	0
		90	99	16.67	16.62	16.50	16.60	1
		180	0	16.52	16.81	16.49	16.56	1
70M	DFT-S 16QAM	1	1	16.53	16.65	16.50	16.52	1
70M	DFT-S 64QAM	1	1	15.17	15.15	14.98	15.16	2.5
70M	DFT-S 256QAM	1	1	13.15	13.14	13.00	13.11	4.5
70M	CP QPSK	1	1	16.23	16.19	16.16	16.14	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 48

BW	MCS Index	Channel		638668	640666	642666	644666	3GPP MPR
		Frequency (MHz)		3580.02	3609.99	3639.99	3669.99	
60M	DFT-S PI/2 BPSK	1	1	17.67	17.63	17.61	17.51	0
60M	DFT-S QPSK	1	1	17.72	17.80	17.60	17.69	0
		1	81	17.60	17.72	17.63	17.45	0
		1	160	17.59	17.70	17.54	17.52	0
		81	0	16.57	16.73	16.52	16.63	1
		81	41	17.66	17.63	17.58	17.64	0
		81	81	16.65	16.68	16.58	16.53	1
		162	0	16.63	16.70	16.57	16.46	1
60M	DFT-S 16QAM	1	1	16.54	16.56	16.46	16.42	1
60M	DFT-S 64QAM	1	1	15.16	15.25	15.00	15.11	2.5
60M	DFT-S 256QAM	1	1	13.19	13.23	13.05	13.09	4.5
60M	CP QPSK	1	1	16.18	16.22	16.13	16.12	1.5
BW	MCS Index	Channel		638334	640556	642778	645000	3GPP MPR
		Frequency (MHz)		3575.01	3608.34	3641.67	3675	
50M	DFT-S PI/2 BPSK	1	1	17.58	17.70	17.59	17.50	0
50M	DFT-S QPSK	1	1	17.63	17.80	17.60	17.68	0
		1	67	17.59	17.70	17.62	17.40	0
		1	131	17.56	17.63	17.60	17.44	0
		64	0	16.63	16.71	16.59	16.53	1
		64	35	17.62	17.74	17.51	17.62	0
		64	69	16.67	16.76	16.57	16.43	1
		128	0	16.49	16.80	16.53	16.41	1
50M	DFT-S 16QAM	1	1	16.53	16.68	16.56	16.39	1
50M	DFT-S 64QAM	1	1	15.14	15.16	14.99	15.03	2.5
50M	DFT-S 256QAM	1	1	13.19	13.22	13.00	12.99	4.5
50M	CP QPSK	1	1	16.17	16.27	16.11	16.06	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 48

BW	MCS Index	Channel		638000	640444	642888	645332	3GPP MPR
		Frequency (MHz)		3570	3606.66	3643.32	3679.98	
40M	DFT-S PI/2 BPSK	1	1	17.69	17.76	17.68	17.73	0
40M	DFT-S QPSK	1	1	17.74	17.84	17.65	17.77	0
		1	53	17.68	17.74	17.61	17.72	0
		1	104	17.66	17.77	17.55	17.61	0
		50	0	16.74	16.83	16.61	16.66	1
		50	28	17.76	17.82	17.70	17.67	0
		50	56	16.71	16.76	16.67	16.69	1
		100	0	16.66	16.81	16.60	16.60	1
40M	DFT-S 16QAM	1	1	16.60	16.69	16.59	16.56	1
40M	DFT-S 64QAM	1	1	15.27	15.29	15.15	15.18	2.5
40M	DFT-S 256QAM	1	1	13.27	13.35	13.18	13.14	4.5
40M	CP QPSK	1	1	16.25	16.35	16.17	16.20	1.5
BW	MCS Index	Channel		637334	640222	643110	646000	3GPP MPR
		Frequency (MHz)		3560.01	3603.33	3646.65	3690	
20M	DFT-S PI/2 BPSK	1	1	17.64	17.73	17.53	17.66	0
20M	DFT-S QPSK	1	1	17.66	17.82	17.53	17.72	0
		1	26	17.58	17.73	17.57	17.67	0
		1	49	17.62	17.75	17.47	17.58	0
		25	0	16.60	16.77	16.56	16.56	1
		25	13	17.69	17.71	17.55	17.59	0
		25	26	16.59	16.72	16.54	16.60	1
		50	0	16.59	16.72	16.49	16.51	1
20M	DFT-S 16QAM	1	1	16.58	16.59	16.52	16.48	1
20M	DFT-S 64QAM	1	1	15.19	15.19	15.02	15.16	2.5
20M	DFT-S 256QAM	1	1	13.18	13.34	13.12	13.11	4.5
20M	CP QPSK	1	1	16.24	16.23	16.02	16.13	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 48

BW	MCS Index	Channel		637168	640168	643166	646166	3GPP MPR
		Frequency (MHz)		3557.52	3602.52	3647.49	3692.49	
15M	DFT-S PI/2 BPSK	1	1	17.65	17.71	17.53	17.65	0
15M	DFT-S QPSK	1	1	17.66	17.79	17.40	17.72	0
		1	19	17.64	17.66	17.44	17.64	0
		1	36	17.54	17.66	17.34	17.52	0
		18	0	16.72	16.73	16.52	16.47	1
		18	10	17.65	17.73	17.50	17.51	0
		18	20	16.63	16.65	16.46	16.54	1
		36	0	16.57	16.72	16.51	16.49	1
15M	DFT-S 16QAM	1	1	16.49	16.66	16.58	16.38	1
15M	DFT-S 64QAM	1	1	15.15	15.23	15.04	15.10	2.5
15M	DFT-S 256QAM	1	1	13.19	13.21	13.05	13.08	4.5
15M	CP QPSK	1	1	16.20	16.30	16.17	16.06	1.5
BW	MCS Index	Channel		637000	640110	643222	646332	3GPP MPR
		Frequency (MHz)		3555	3601.65	3648.33	3694.98	
10M	DFT-S PI/2 BPSK	1	1	17.62	17.67	17.54	17.61	0
10M	DFT-S QPSK	1	1	17.74	17.70	17.65	17.71	0
		1	11	17.55	17.70	17.53	17.63	0
		1	22	17.59	17.75	17.49	17.42	0
		12	0	16.70	16.74	16.58	16.46	1
		12	6	17.62	17.78	17.57	17.48	0
		12	12	16.71	16.73	16.59	16.50	1
		24	0	16.58	16.69	16.46	16.46	1
10M	DFT-S 16QAM	1	1	16.54	16.65	16.56	16.30	1
10M	DFT-S 64QAM	1	1	15.18	15.20	15.14	15.05	2.5
10M	DFT-S 256QAM	1	1	13.15	13.32	13.05	12.99	4.5
10M	CP QPSK	1	1	16.23	16.31	16.04	16.06	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 77

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	22.58	22.32	22.24	22.66	22.68	0
100M	DFT-S QPSK	1	1	22.61	22.35	22.27	22.69	22.71	0
		1	137	22.59	22.33	22.25	22.67	22.69	0
		1	271	22.55	22.29	22.21	22.63	22.65	0
		135	0	21.57	21.31	21.23	21.65	21.67	1
		135	69	22.53	22.27	22.19	22.61	22.63	0
		135	138	21.55	21.29	21.21	21.63	21.65	1
		270	0	21.51	21.25	21.17	21.59	21.61	1
100M	DFT-S 16QAM	1	1	21.49	21.23	21.15	21.57	21.59	1
100M	DFT-S 64QAM	1	1	20.12	19.86	19.78	20.20	20.22	2.5
100M	DFT-S 256QAM	1	1	18.14	17.88	17.80	18.22	18.24	4.5
100M	CP QPSK	1	1	21.21	20.95	20.87	21.29	21.31	1.5
BW	MCS Index	Channel		649668	652834	656000	659166	662332	3GPP MPR
		Frequency (MHz)		3745.02	3792.51	3840	3887.49	3934.98	
90M	DFT-S PI/2 BPSK	1	1	22.51	22.32	22.15	22.64	22.62	0
90M	DFT-S QPSK	1	1	22.57	22.34	22.24	22.67	22.70	0
		1	123	22.54	22.32	22.25	22.57	22.62	0
		1	243	22.45	22.21	22.17	22.60	22.55	0
		120	0	21.55	21.24	21.21	21.57	21.60	1
		120	63	22.48	22.23	22.17	22.58	22.55	0
		120	125	21.49	21.25	21.14	21.63	21.64	1
		243	0	21.45	21.19	21.17	21.52	21.53	1
90M	DFT-S 16QAM	1	1	21.46	21.22	21.10	21.50	21.51	1
90M	DFT-S 64QAM	1	1	20.10	19.78	19.72	20.16	20.12	2.5
90M	DFT-S 256QAM	1	1	18.04	17.83	17.75	18.19	18.21	4.5
90M	CP QPSK	1	1	21.11	20.85	20.86	21.19	21.23	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 77

BW	MCS Index	Channel		649334	652666	656000	659334	662666	3GPP MPR
		Frequency (MHz)		3740.01	3789.99	3840	3890.01	3939.99	
80M	DFT-S PI/2 BPSK	1	1	22.38	22.18	22.12	22.59	22.54	0
80M	DFT-S QPSK	1	1	22.49	22.29	22.22	22.63	22.62	0
		1	109	22.39	22.31	22.13	22.57	22.61	0
		1	215	22.33	22.12	22.17	22.50	22.52	0
		108	0	21.46	21.10	21.12	21.47	21.51	1
		108	55	22.44	22.20	22.14	22.55	22.48	0
		108	109	21.47	21.13	20.99	21.62	21.63	1
		216	0	21.31	21.12	21.05	21.48	21.52	1
80M	DFT-S 16QAM	1	1	21.44	21.19	20.99	21.49	21.48	1
80M	DFT-S 64QAM	1	1	19.99	19.78	19.58	20.07	20.10	2.5
80M	DFT-S 256QAM	1	1	18.04	17.81	17.66	18.09	18.11	4.5
80M	CP QPSK	1	1	21.06	20.83	20.76	21.15	21.13	1.5
BW	MCS Index	Channel		649000	652500	656000	659500	663000	3GPP MPR
		Frequency (MHz)		3735	3787.5	3840	3892.5	3945	
70M	DFT-S PI/2 BPSK	1	1	22.50	22.23	22.10	22.53	22.46	0
70M	DFT-S QPSK	1	1	22.43	22.29	22.21	22.58	22.58	0
		1	95	22.50	22.25	22.03	22.56	22.53	0
		1	187	22.44	22.07	22.06	22.48	22.42	0
		90	0	21.54	21.18	21.11	21.37	21.41	1
		90	50	22.33	22.12	22.12	22.54	22.39	0
		90	99	21.39	21.14	20.88	21.62	21.58	1
		180	0	21.44	21.12	21.17	21.48	21.49	1
70M	DFT-S 16QAM	1	1	21.31	21.19	20.97	21.49	21.38	1
70M	DFT-S 64QAM	1	1	19.97	19.63	19.62	20.05	20.10	2.5
70M	DFT-S 256QAM	1	1	18.03	17.68	17.60	18.01	18.06	4.5
70M	CP QPSK	1	1	20.98	20.81	20.74	21.06	21.04	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 77

BW	MCS Index	Channel		648668	652334	656000	659666	663332	3GPP MPR
		Frequency (MHz)		3730.02	3785.01	3840	3894.99	3949.98	
60M	DFT-S PI/2 BPSK	1	1	22.49	22.23	22.03	22.49	22.46	0
60M	DFT-S QPSK	1	1	22.49	22.29	22.18	22.57	22.52	0
		1	81	22.50	22.31	22.15	22.55	22.50	0
		1	160	22.32	22.16	22.14	22.43	22.32	0
		81	0	21.44	21.18	21.17	21.29	21.41	1
		81	41	22.41	22.11	22.05	22.52	22.34	0
		81	81	21.49	21.22	21.10	21.55	21.54	1
		162	0	21.34	21.18	21.10	21.42	21.46	1
60M	DFT-S 16QAM	1	1	21.32	21.14	20.95	21.44	21.31	1
60M	DFT-S 64QAM	1	1	20.00	19.73	19.64	19.96	20.04	2.5
60M	DFT-S 256QAM	1	1	18.00	17.75	17.74	17.92	18.03	4.5
60M	CP QPSK	1	1	21.10	20.73	20.83	20.99	20.94	1.5
BW	MCS Index	Channel		648334	652166	656000	659834	663666	3GPP MPR
		Frequency (MHz)		3725.01	3782.49	3840	3897.51	3954.99	
50M	DFT-S PI/2 BPSK	1	1	22.48	22.17	22.15	22.42	22.44	0
50M	DFT-S QPSK	1	1	22.48	22.34	22.18	22.48	22.43	0
		1	67	22.44	22.17	22.10	22.52	22.40	0
		1	131	22.36	22.12	22.09	22.35	22.24	0
		64	0	21.44	21.12	21.15	21.26	21.31	1
		64	35	22.43	22.22	22.02	22.52	22.31	0
		64	69	21.35	21.24	21.14	21.51	21.52	1
		128	0	21.38	21.08	21.09	21.37	21.45	1
50M	DFT-S 16QAM	1	1	21.32	21.22	21.02	21.39	21.29	1
50M	DFT-S 64QAM	1	1	20.03	19.66	19.58	19.87	19.94	2.5
50M	DFT-S 256QAM	1	1	17.96	17.81	17.67	17.82	18.02	4.5
50M	CP QPSK	1	1	20.96	20.72	20.78	20.95	20.85	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 77

BW	MCS Index	Channel		648000	652000	656000	660000	664000	3GPP MPR
		Frequency (MHz)		3720	3780	3840	3900	3960	
40M	DFT-S PI/2 BPSK	1	1	22.52	22.30	22.17	22.66	22.67	0
40M	DFT-S QPSK	1	1	22.57	22.27	22.24	22.67	22.65	0
		1	53	22.55	22.26	22.18	22.57	22.63	0
		1	104	22.52	22.22	22.20	22.60	22.64	0
		50	0	21.50	21.29	21.20	21.63	21.63	1
		50	28	22.52	22.25	22.17	22.55	22.58	0
		50	56	21.55	21.21	21.15	21.58	21.56	1
		100	0	21.41	21.21	21.16	21.54	21.58	1
40M	DFT-S 16QAM	1	1	21.45	21.17	21.07	21.53	21.50	1
40M	DFT-S 64QAM	1	1	20.03	19.83	19.72	20.19	20.22	2.5
40M	DFT-S 256QAM	1	1	18.14	17.86	17.75	18.15	18.14	4.5
40M	CP QPSK	1	1	21.19	20.94	20.86	21.27	21.24	1.5
BW	MCS Index	Channel		647668	651834	656000	660166	664332	3GPP MPR
		Frequency (MHz)		3715.02	3777.51	3840	3902.49	3964.98	
30M	DFT-S PI/2 BPSK	1	1	22.45	22.17	22.14	22.62	22.64	0
30M	DFT-S QPSK	1	1	22.42	22.26	22.20	22.65	22.67	0
		1	39	22.40	22.25	22.03	22.53	22.53	0
		1	76	22.38	22.09	22.15	22.59	22.54	0
		36	0	21.42	21.14	21.10	21.55	21.60	1
		36	21	22.50	22.24	22.16	22.51	22.50	0
		36	42	21.54	21.09	21.01	21.57	21.46	1
		75	0	21.34	21.13	21.14	21.44	21.48	1
30M	DFT-S 16QAM	1	1	21.42	21.03	21.00	21.46	21.42	1
30M	DFT-S 64QAM	1	1	20.02	19.79	19.68	20.13	20.19	2.5
30M	DFT-S 256QAM	1	1	18.05	17.78	17.74	18.11	18.07	4.5
30M	CP QPSK	1	1	21.13	20.89	20.71	21.22	21.22	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 77

BW	MCS Index	Channel		647500	651750	656000	660250	664500	3GPP MPR
		Frequency (MHz)		3712.5	3776.25	3840	3903.75	3967.5	
25M	DFT-S PI/2 BPSK	1	1	22.38	22.22	22.08	22.55	22.58	0
25M	DFT-S QPSK	1	1	22.55	22.18	22.09	22.59	22.60	0
		1	33	22.53	22.22	21.97	22.50	22.44	0
		1	63	22.49	22.20	22.03	22.57	22.44	0
		32	0	21.45	21.21	20.95	21.45	21.60	1
		32	17	22.49	22.14	22.12	22.51	22.42	0
		32	33	21.44	21.06	20.96	21.47	21.43	1
		64	0	21.41	21.06	21.03	21.34	21.38	1
25M	DFT-S 16QAM	1	1	21.35	21.16	21.03	21.42	21.34	1
25M	DFT-S 64QAM	1	1	20.00	19.71	19.71	20.09	20.14	2.5
25M	DFT-S 256QAM	1	1	18.10	17.72	17.68	18.07	18.03	4.5
25M	CP QPSK	1	1	21.04	20.83	20.80	21.15	21.17	1.5
BW	MCS Index	Channel		647334	651666	656000	660266	664666	3GPP MPR
		Frequency (MHz)		3710.01	3774.99	3840	3903.99	3969.99	
20M	DFT-S PI/2 BPSK	1	1	22.46	22.19	22.16	22.45	22.56	0
20M	DFT-S QPSK	1	1	22.44	22.13	22.19	22.49	22.59	0
		1	26	22.46	22.17	22.17	22.49	22.36	0
		1	49	22.42	22.20	22.17	22.56	22.42	0
		25	0	21.49	21.23	21.11	21.37	21.57	1
		25	13	22.40	22.16	22.04	22.42	22.42	0
		25	26	21.51	21.16	21.08	21.39	21.38	1
		50	0	21.33	21.08	21.16	21.30	21.28	1
20M	DFT-S 16QAM	1	1	21.39	21.15	20.94	21.36	21.32	1
20M	DFT-S 64QAM	1	1	19.88	19.81	19.61	20.05	20.08	2.5
20M	DFT-S 256QAM	1	1	18.11	17.76	17.72	18.07	17.97	4.5
20M	CP QPSK	1	1	21.14	20.85	20.78	21.12	21.15	1.5

NR Conducted Power_ENDC_Laptop_Ant 2									
NR Band 77									
BW	MCS Index	Channel		647168	651584	656000	660416	664832	3GPP MPR
		Frequency (MHz)		3707.52	3773.76	3840	3906.24	3972.48	
15M	DFT-S PI/2 BPSK	1	1	22.37	22.21	22.12	22.41	22.51	0
15M	DFT-S QPSK	1	1	22.55	22.25	22.19	22.43	22.56	0
		1	19	22.40	22.24	22.13	22.48	22.28	0
		1	36	22.52	22.18	22.14	22.54	22.39	0
		18	0	21.50	21.28	21.11	21.36	21.57	1
		18	10	22.47	22.20	22.13	22.38	22.38	0
		18	20	21.46	21.17	21.05	21.35	21.38	1
		36	0	21.27	21.07	21.04	21.25	21.28	1
15M	DFT-S 16QAM	1	1	21.36	21.13	20.92	21.35	21.22	1
15M	DFT-S 64QAM	1	1	19.92	19.80	19.69	19.96	20.01	2.5
15M	DFT-S 256QAM	1	1	18.14	17.81	17.65	18.02	17.88	4.5
15M	CP QPSK	1	1	21.13	20.82	20.86	21.04	21.08	1.5
BW	MCS Index	Channel		647000	651500	656000	660500	665000	3GPP MPR
		Frequency (MHz)		3705	3772.5	3840	3907.5	3975	
10M	DFT-S PI/2 BPSK	1	1	22.44	22.26	22.07	22.45	22.37	0
10M	DFT-S QPSK	1	1	22.50	22.26	22.13	22.50	22.46	0
		1	11	22.44	22.13	22.22	22.50	22.48	0
		1	22	22.44	22.27	22.00	22.26	22.31	0
		12	0	21.41	21.16	21.08	21.37	21.40	1
		12	6	22.46	22.23	22.05	22.32	22.47	0
		12	12	21.49	21.21	21.13	21.44	21.45	1
		24	0	21.34	21.22	21.01	21.29	21.43	1
10M	DFT-S 16QAM	1	1	21.45	21.01	20.96	21.37	21.23	1
10M	DFT-S 64QAM	1	1	19.99	19.67	19.68	19.94	19.94	2.5
10M	DFT-S 256QAM	1	1	18.04	17.84	17.57	18.00	17.87	4.5
10M	CP QPSK	1	1	21.08	20.82	20.81	21.08	21.01	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 78

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		20.68		0
100M	DFT-S QPSK	1	1		20.72		0
		1	137		20.65		0
		1	271		20.66		0
		135	0		19.68		1
		135	69		20.69		0
		135	138		19.65		1
		270	0		19.69		1
100M	DFT-S 16QAM	1	1		19.62		1
100M	DFT-S 64QAM	1	1		18.19		2.5
100M	DFT-S 256QAM	1	1		16.14		4.5
100M	CP QPSK	1	1		19.25		1.5
BW	MCS Index	Channel		649668	650000	650332	3GPP MPR
		Frequency (MHz)		3745.02	3750	3754.98	
90M	DFT-S PI/2 BPSK	1	1	20.60	20.62	20.65	0
90M	DFT-S QPSK	1	1	20.65	20.68	20.62	0
		1	123	20.55	20.58	20.62	0
		1	243	20.52	20.64	20.60	0
		120	0	19.59	19.58	19.57	1
		120	63	20.57	20.59	20.66	0
		120	125	19.51	19.55	19.53	1
		243	0	19.62	19.69	19.66	1
90M	DFT-S 16QAM	1	1	19.48	19.56	19.52	1
90M	DFT-S 64QAM	1	1	18.13	18.17	18.10	2.5
90M	DFT-S 256QAM	1	1	15.99	16.07	16.11	4.5
90M	CP QPSK	1	1	19.16	19.23	19.13	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 78

BW	MCS Index	Channel		649334	650000	650666	3GPP MPR
		Frequency (MHz)		3740.01	3750	3759.99	
80M	DFT-S PI/2 BPSK	1	1	20.58	20.66	20.60	0
80M	DFT-S QPSK	1	1	20.57	20.71	20.63	0
		1	109	20.50	20.65	20.54	0
		1	215	20.59	20.62	20.63	0
		108	0	19.52	19.66	19.58	1
		108	55	20.57	20.62	20.57	0
		108	109	19.56	19.59	19.61	1
		216	0	19.61	19.62	19.62	1
80M	DFT-S 16QAM	1	1	19.50	19.60	19.56	1
80M	DFT-S 64QAM	1	1	18.06	18.10	18.13	2.5
80M	DFT-S 256QAM	1	1	16.03	16.04	16.07	4.5
80M	CP QPSK	1	1	19.12	19.25	19.18	1.5
BW	MCS Index	Channel		649000	650000	651000	3GPP MPR
		Frequency (MHz)		3735	3750	3765	
70M	DFT-S PI/2 BPSK	1	1	20.59	20.55	20.62	0
70M	DFT-S QPSK	1	1	20.63	20.59	20.60	0
		1	95	20.56	20.52	20.57	0
		1	187	20.52	20.48	20.61	0
		90	0	19.52	19.48	19.58	1
		90	50	20.63	20.59	20.59	0
		90	99	19.56	19.52	19.56	1
		180	0	19.55	19.51	19.56	1
70M	DFT-S 16QAM	1	1	19.55	19.51	19.59	1
70M	DFT-S 64QAM	1	1	18.07	18.03	18.11	2.5
70M	DFT-S 256QAM	1	1	15.99	15.95	16.05	4.5
70M	CP QPSK	1	1	19.10	19.06	19.22	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 78

BW	MCS Index	Channel		648668	650000	651332	3GPP MPR
		Frequency (MHz)		3730.02	3750	3769.98	
60M	DFT-S PI/2 BPSK	1	1	20.61	20.58	20.60	0
60M	DFT-S QPSK	1	1	20.57	20.65	20.67	0
		1	81	20.53	20.61	20.57	0
		1	160	20.56	20.65	20.59	0
		81	0	19.54	19.66	19.58	1
		81	41	20.55	20.66	20.64	0
		81	81	19.50	19.62	19.52	1
		162	0	19.57	19.59	19.66	1
60M	DFT-S 16QAM	1	1	19.52	19.57	19.53	1
60M	DFT-S 64QAM	1	1	18.11	18.14	18.13	2.5
60M	DFT-S 256QAM	1	1	16.08	16.13	16.05	4.5
60M	CP QPSK	1	1	19.14	19.21	19.15	1.5
BW	MCS Index	Channel		648334	650000	651666	3GPP MPR
		Frequency (MHz)		3725.01	3750	3774.99	
50M	DFT-S PI/2 BPSK	1	1	20.54	20.61	20.55	0
50M	DFT-S QPSK	1	1	20.56	20.71	20.63	0
		1	67	20.57	20.63	20.52	0
		1	131	20.50	20.66	20.55	0
		64	0	19.60	19.59	19.62	1
		64	35	20.59	20.60	20.63	0
		64	69	19.52	19.58	19.56	1
		128	0	19.55	19.65	19.58	1
50M	DFT-S 16QAM	1	1	19.53	19.57	19.52	1
50M	DFT-S 64QAM	1	1	18.03	18.15	18.10	2.5
50M	DFT-S 256QAM	1	1	16.05	16.13	16.08	4.5
50M	CP QPSK	1	1	19.19	19.20	19.19	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 78

BW	MCS Index	Channel		648000	650000	652000	3GPP MPR
		Frequency (MHz)		3720	3750	3780	
40M	DFT-S PI/2 BPSK	1	1	20.61	20.59	20.59	0
40M	DFT-S QPSK	1	1	20.65	20.71	20.67	0
		1	53	20.50	20.61	20.54	0
		1	104	20.58	20.62	20.61	0
		50	0	19.60	19.59	19.58	1
		50	28	20.61	20.61	20.65	0
		50	56	19.56	19.60	19.62	1
		100	0	19.62	19.60	19.58	1
40M	DFT-S 16QAM	1	1	19.54	19.55	19.55	1
40M	DFT-S 64QAM	1	1	18.04	18.11	18.10	2.5
40M	DFT-S 256QAM	1	1	16.05	16.08	16.07	4.5
40M	CP QPSK	1	1	19.13	19.25	19.21	1.5
BW	MCS Index	Channel		647668	650000	652332	3GPP MPR
		Frequency (MHz)		3715.02	3750	3784.98	
30M	DFT-S PI/2 BPSK	1	1	20.59	20.63	20.64	0
30M	DFT-S QPSK	1	1	20.66	20.66	20.66	0
		1	39	20.55	20.58	20.54	0
		1	76	20.50	20.56	20.59	0
		36	0	19.61	19.60	19.59	1
		36	21	20.63	20.65	20.63	0
		36	42	19.55	19.58	19.62	1
		75	0	19.59	19.68	19.61	1
30M	DFT-S 16QAM	1	1	19.49	19.57	19.58	1
30M	DFT-S 64QAM	1	1	18.12	18.09	18.07	2.5
30M	DFT-S 256QAM	1	1	16.00	16.08	16.01	4.5
30M	CP QPSK	1	1	19.19	19.15	19.15	1.5

NR Conducted Power_ENDC_Laptop_Ant 2

NR Band 78

BW	MCS Index	Channel		647500	650000	652500	3GPP MPR
		Frequency (MHz)		3712.5	3750	3787.5	
25M	DFT-S PI/2 BPSK	1	1	20.58	20.65	20.57	0
25M	DFT-S QPSK	1	1	20.61	20.66	20.66	0
		1	33	20.55	20.64	20.59	0
		1	63	20.57	20.59	20.55	0
		32	0	19.56	19.67	19.58	1
		32	17	20.56	20.69	20.66	0
		32	33	19.57	19.58	19.57	1
		64	0	19.54	19.62	19.64	1
25M	DFT-S 16QAM	1	1	19.52	19.53	19.59	1
25M	DFT-S 64QAM	1	1	18.10	18.09	18.10	2.5
25M	DFT-S 256QAM	1	1	16.05	16.11	16.04	4.5
25M	CP QPSK	1	1	19.12	19.17	19.21	1.5
BW	MCS Index	Channel		647334	650000	652666	3GPP MPR
		Frequency (MHz)		3710.01	3750	3789.99	
20M	DFT-S PI/2 BPSK	1	1	20.59	20.64	20.55	0
20M	DFT-S QPSK	1	1	20.62	20.64	20.60	0
		1	26	20.53	20.63	20.56	0
		1	49	20.57	20.61	20.53	0
		25	0	19.53	19.68	19.57	1
		25	13	20.55	20.62	20.58	0
		25	26	19.57	19.59	19.57	1
		50	0	19.60	19.61	19.66	1
20M	DFT-S 16QAM	1	1	19.49	19.61	19.53	1
20M	DFT-S 64QAM	1	1	18.13	18.13	18.10	2.5
20M	DFT-S 256QAM	1	1	16.01	16.04	16.01	4.5
20M	CP QPSK	1	1	19.19	19.25	19.12	1.5

NR Conducted Power_ENDC_Laptop_Ant 2							
NR Band 78							
BW	MCS Index	Channel		647168	650000	652832	3GPP MPR
		Frequency (MHz)		3707.52	3750	3792.48	
15M	DFT-S PI/2 BPSK	1	1	20.57	20.64	20.63	0
15M	DFT-S QPSK	1	1	20.64	20.68	20.67	0
		1	19	20.59	20.64	20.53	0
		1	36	20.50	20.56	20.53	0
		18	0	19.56	19.64	19.65	1
		18	10	20.60	20.69	20.58	0
		18	20	19.57	19.59	19.61	1
		36	0	19.57	19.68	19.66	1
15M	DFT-S 16QAM	1	1	19.55	19.62	19.52	1
15M	DFT-S 64QAM	1	1	18.10	18.09	18.06	2.5
15M	DFT-S 256QAM	1	1	16.07	16.14	16.07	4.5
15M	CP QPSK	1	1	19.14	19.19	19.21	1.5
BW	MCS Index	Channel		647000	650000	653000	3GPP MPR
		Frequency (MHz)		3705	3750	3795	
10M	DFT-S PI/2 BPSK	1	1	20.60	20.61	20.63	0
10M	DFT-S QPSK	1	1	20.61	20.63	20.62	0
		1	11	20.56	20.61	20.58	0
		1	22	20.51	20.62	20.56	0
		12	0	19.56	19.62	19.62	1
		12	6	20.60	20.60	20.64	0
		12	12	19.55	19.59	19.53	1
		24	0	19.55	19.69	19.56	1
10M	DFT-S 16QAM	1	1	19.52	19.52	19.51	1
10M	DFT-S 64QAM	1	1	18.05	18.16	18.15	2.5
10M	DFT-S 256QAM	1	1	15.98	16.08	16.08	4.5
10M	CP QPSK	1	1	19.10	19.15	19.14	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 2

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	10.82	10.93	11.44	0
20M	DFT-S QPSK	1	1	10.87	10.99	11.47	0
		1	53	10.79	10.91	11.39	0
		1	104	10.84	10.96	11.44	0
		50	0	9.81	9.93	10.41	1
		50	28	10.80	10.92	11.40	0
		50	56	9.77	9.89	10.37	1
		100	0	9.74	9.86	10.34	1
20M	DFT-S 16QAM	1	1	9.74	9.86	10.34	1
20M	DFT-S 64QAM	1	1	8.31	8.43	8.91	2.5
20M	DFT-S 256QAM	1	1	6.21	6.33	6.81	4.5
20M	CP QPSK	1	1	9.37	9.49	9.97	1.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	10.84	10.91	11.36	0
15M	DFT-S QPSK	1	1	10.86	10.96	11.45	0
		1	40	10.74	10.88	11.39	0
		1	77	10.78	10.95	11.34	0
		36	0	9.81	9.84	10.33	1
		36	22	10.79	10.84	11.31	0
		36	43	9.76	9.85	10.33	1
		75	0	9.65	9.79	10.34	1
15M	DFT-S 16QAM	1	1	9.72	9.78	10.30	1
15M	DFT-S 64QAM	1	1	8.29	8.43	8.89	2.5
15M	DFT-S 256QAM	1	1	6.21	6.31	6.80	4.5
15M	CP QPSK	1	1	9.35	9.43	9.92	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 2

BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	10.79	10.91	11.43	0
10M	DFT-S QPSK	1	1	10.83	10.90	11.39	0
		1	26	10.72	10.90	11.33	0
		1	50	10.77	10.95	11.38	0
		25	0	9.81	9.89	10.32	1
		25	14	10.78	10.84	11.31	0
		25	27	9.72	9.88	10.27	1
		50	0	9.68	9.83	10.24	1
10M	DFT-S 16QAM	1	1	9.71	9.81	10.28	1
10M	DFT-S 64QAM	1	1	8.23	8.37	8.82	2.5
10M	DFT-S 256QAM	1	1	6.20	6.33	6.74	4.5
10M	CP QPSK	1	1	9.32	9.40	9.90	1.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	10.84	10.88	11.34	0
5M	DFT-S QPSK	1	1	10.85	10.97	11.42	0
		1	13	10.74	10.81	11.29	0
		1	23	10.83	10.96	11.35	0
		12	0	9.75	9.83	10.35	1
		12	7	10.79	10.91	11.35	0
		12	13	9.74	9.89	10.36	1
		25	0	9.71	9.81	10.30	1
5M	DFT-S 16QAM	1	1	9.68	9.79	10.31	1
5M	DFT-S 64QAM	1	1	8.31	8.42	8.86	2.5
5M	DFT-S 256QAM	1	1	6.19	6.27	6.77	4.5
5M	CP QPSK	1	1	9.37	9.44	9.87	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 5

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	14.57	14.66	14.49	0
20M	DFT-S QPSK	1	1	14.66	14.79	14.68	0
		1	53	14.56	14.70	14.64	0
		1	104	14.61	14.75	14.69	0
		50	0	13.58	13.72	13.66	1
		50	28	14.57	14.71	14.65	0
		50	56	13.54	13.68	13.62	1
		100	0	13.51	13.65	13.59	1
20M	DFT-S 16QAM	1	1	13.51	13.65	13.59	1
20M	DFT-S 64QAM	1	1	12.08	12.22	12.16	2.5
20M	DFT-S 256QAM	1	1	9.98	10.12	10.06	4.5
20M	CP QPSK	1	1	13.14	13.28	13.22	1.5
BW	MCS Index	Channel		166300	167300	168300	3GPP MPR
		Frequency (MHz)		831.5	836.5	841.5	
15M	DFT-S PI/2 BPSK	1	1	14.61	14.70	14.61	0
15M	DFT-S QPSK	1	1	14.63	14.75	14.70	0
		1	40	14.51	14.67	14.64	0
		1	77	14.55	14.74	14.59	0
		36	0	13.58	13.63	13.58	1
		36	22	14.56	14.63	14.56	0
		36	43	13.53	13.64	13.58	1
		75	0	13.42	13.58	13.59	1
15M	DFT-S 16QAM	1	1	13.49	13.57	13.55	1
15M	DFT-S 64QAM	1	1	12.06	12.22	12.14	2.5
15M	DFT-S 256QAM	1	1	9.98	10.10	10.05	4.5
15M	CP QPSK	1	1	13.12	13.22	13.17	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 5

BW	MCS Index	Channel		165800	167300	168800	3GPP MPR
		Frequency (MHz)		829	836.5	844	
10M	DFT-S PI/2 BPSK	1	1	14.56	14.70	14.68	0
10M	DFT-S QPSK	1	1	14.60	14.69	14.64	0
		1	26	14.49	14.69	14.58	0
		1	50	14.54	14.74	14.63	0
		25	0	13.58	13.68	13.57	1
		25	14	14.55	14.63	14.56	0
		25	27	13.49	13.67	13.52	1
		50	0	13.45	13.62	13.49	1
10M	DFT-S 16QAM	1	1	13.48	13.60	13.53	1
10M	DFT-S 64QAM	1	1	12.00	12.16	12.07	2.5
10M	DFT-S 256QAM	1	1	9.97	10.12	9.99	4.5
10M	CP QPSK	1	1	13.09	13.19	13.15	1.5
BW	MCS Index	Channel		165300	167300	169300	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	DFT-S PI/2 BPSK	1	1	14.61	14.67	14.59	0
5M	DFT-S QPSK	1	1	14.62	14.76	14.67	0
		1	13	14.51	14.60	14.54	0
		1	23	14.60	14.75	14.60	0
		12	0	13.52	13.62	13.60	1
		12	7	14.56	14.70	14.60	0
		12	13	13.51	13.68	13.61	1
		25	0	13.48	13.60	13.55	1
5M	DFT-S 16QAM	1	1	13.45	13.58	13.56	1
5M	DFT-S 64QAM	1	1	12.08	12.21	12.11	2.5
5M	DFT-S 256QAM	1	1	9.96	10.06	10.02	4.5
5M	CP QPSK	1	1	13.14	13.23	13.12	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 7

BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	9.27	9.31	9.42	0
20M	DFT-S QPSK	1	1	9.34	9.36	9.49	0
		1	53	9.22	9.27	9.41	0
		1	104	9.26	9.30	9.38	0
		50	0	8.18	8.36	8.44	1
		50	28	9.07	9.26	9.36	0
		50	56	8.13	8.15	8.34	1
		100	0	8.21	8.19	8.38	1
20M	DFT-S 16QAM	1	1	8.26	8.32	8.45	1
20M	DFT-S 64QAM	1	1	6.54	6.55	6.75	2.5
20M	DFT-S 256QAM	1	1	4.72	4.76	4.87	4.5
20M	CP QPSK	1	1	7.71	7.77	7.87	1.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	9.12	9.22	9.30	
15M	DFT-S QPSK	1	1	9.20	9.29	9.42	0
		1	40	9.02	9.06	9.40	0
		1	77	9.11	9.20	9.34	0
		36	0	8.03	8.24	8.33	1
		36	22	8.95	9.16	9.21	0
		36	43	8.02	8.06	8.19	1
		75	0	8.14	8.15	8.27	1
15M	DFT-S 16QAM	1	1	8.14	8.15	8.41	1
15M	DFT-S 64QAM	1	1	6.38	6.30	6.71	2.5
15M	DFT-S 256QAM	1	1	4.52	4.63	4.75	4.5
15M	CP QPSK	1	1	7.63	7.70	7.81	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 7

BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	9.03	9.15	9.29	0
10M	DFT-S QPSK	1	1	9.19	9.16	9.34	0
		1	26	9.16	9.04	9.29	0
		1	50	9.16	9.14	9.28	0
		25	0	8.14	8.27	8.36	1
		25	14	8.93	9.09	9.13	0
		25	27	8.05	8.08	8.19	1
		50	0	8.06	8.02	8.20	1
10M	DFT-S 16QAM	1	1	8.11	8.25	8.33	1
10M	DFT-S 64QAM	1	1	6.45	6.37	6.72	2.5
10M	DFT-S 256QAM	1	1	4.58	4.65	4.69	4.5
10M	CP QPSK	1	1	7.57	7.54	7.77	1.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	9.14	9.24	9.32	0
5M	DFT-S QPSK	1	1	9.16	9.20	9.42	0
		1	13	9.08	9.03	9.35	0
		1	23	9.10	9.18	9.28	0
		12	0	8.00	8.25	8.39	1
		12	7	9.00	9.18	9.25	0
		12	13	7.89	8.01	8.16	1
		25	0	8.08	8.06	8.21	1
5M	DFT-S 16QAM	1	1	8.09	8.13	8.28	1
5M	DFT-S 64QAM	1	1	6.42	6.45	6.59	2.5
5M	DFT-S 256QAM	1	1	4.67	4.54	4.78	4.5
5M	CP QPSK	1	1	7.57	7.71	7.72	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 25

BW	MCS Index	Channel		372000	376500	381000	3GPP MPR
		Frequency (MHz)		1860	1882.5	1905	
20M	DFT-S PI/2 BPSK	1	1	9.79	9.88	10.11	0
20M	DFT-S QPSK	1	1	9.85	9.92	10.14	0
		1	53	9.77	9.82	10.06	0
		1	104	9.76	9.79	10.03	0
		50	0	8.75	8.80	9.04	1
		50	28	9.79	9.85	10.09	0
		50	56	8.76	8.75	8.96	1
		100	0	8.78	8.82	9.06	1
20M	DFT-S 16QAM	1	1	8.75	8.76	8.93	1
20M	DFT-S 64QAM	1	1	7.26	7.36	7.60	2.5
20M	DFT-S 256QAM	1	1	5.25	5.26	5.50	4.5
20M	CP QPSK	1	1	8.34	8.44	8.68	1.5
BW	MCS Index	Channel		371500	376500	381500	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	DFT-S PI/2 BPSK	1	1	9.75	9.88	10.11	0
15M	DFT-S QPSK	1	1	9.82	9.92	10.09	0
		1	40	9.77	9.79	9.98	0
		1	77	9.75	9.73	10.01	0
		36	0	8.74	8.73	9.00	1
		36	22	9.76	9.78	10.09	0
		36	43	8.76	8.75	8.87	1
		75	0	8.75	8.76	9.05	1
15M	DFT-S 16QAM	1	1	8.76	8.77	8.93	1
15M	DFT-S 64QAM	1	1	7.25	7.35	7.58	2.5
15M	DFT-S 256QAM	1	1	5.25	5.26	5.45	4.5
15M	CP QPSK	1	1	8.28	8.35	8.66	1.5

NR Conducted Power_ENDC_Tablet_Ant 0							
NR Band 25							
BW	MCS Index	Channel		371000	376500	382000	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	DFT-S PI/2 BPSK	1	1	9.76	9.87	10.06	0
10M	DFT-S QPSK	1	1	9.75	9.84	10.05	0
		1	26	9.77	9.77	10.00	0
		1	50	9.77	9.76	10.00	0
		25	0	8.78	8.77	9.00	1
		25	14	9.75	9.84	10.07	0
		25	27	8.77	8.75	8.91	1
		50	0	8.76	8.76	9.05	1
10M	DFT-S 16QAM	1	1	8.76	8.78	8.92	1
10M	DFT-S 64QAM	1	1	7.25	7.29	7.57	2.5
10M	DFT-S 256QAM	1	1	5.26	5.25	5.43	4.5
10M	CP QPSK	1	1	8.33	8.40	8.62	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 25

BW	MCS Index	Channel		370500	376500	382500	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	DFT-S PI/2 BPSK	1	1	9.75	9.82	10.08	0
5M	DFT-S QPSK	1	1	9.80	9.91	10.09	0
		1	13	9.76	9.82	9.99	0
		1	23	9.75	9.77	10.00	0
		12	0	9.75	8.76	9.03	1
		12	7	9.74	9.85	10.06	0
		12	13	8.74	8.76	8.87	1
		25	0	8.75	8.74	9.00	1
5M	DFT-S 16QAM	1	1	8.78	8.76	8.93	1
5M	DFT-S 64QAM	1	1	7.29	7.32	7.59	2.5
5M	DFT-S 256QAM	1	1	5.26	5.25	5.48	4.5
5M	CP QPSK	1	1	8.34	8.36	8.64	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 30

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			462000		
		Frequency (MHz)			2310		
10M	DFT-S PI/2 BPSK	1	1		9.88		0
10M	DFT-S QPSK	1	1		9.98		0
		1	26		9.93		0
		1	50		9.89		0
		25	0		8.99		1
		25	14		9.87		0
		25	27		8.91		1
		50	0		8.93		1
10M	DFT-S 16QAM	1	1		8.89		1
10M	DFT-S 64QAM	1	1		7.43		2.5
10M	DFT-S 256QAM	1	1		5.37		4.5
10M	CP QPSK	1	1		8.49		1.5
BW	MCS Index	Channel		461500	462000	462500	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	DFT-S PI/2 BPSK	1	1	9.66	9.84	9.72	0
5M	DFT-S QPSK	1	1	9.76	9.95	9.85	0
		1	13	9.78	9.86	9.88	0
		1	23	9.67	9.83	9.79	0
		12	0	8.93	8.94	8.88	1
		12	7	9.78	9.87	9.82	0
		12	13	8.69	8.89	8.84	1
		25	0	8.79	8.93	8.84	1
5M	DFT-S 16QAM	1	1	8.72	8.83	8.73	1
5M	DFT-S 64QAM	1	1	7.24	7.35	7.29	2.5
5M	DFT-S 256QAM	1	1	5.18	5.30	5.22	4.5
5M	CP QPSK	1	1	8.28	8.42	8.37	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 66

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		346000	349000	352000	
		Frequency (MHz)		1730	1745	1760	
40M	DFT-S PI/2 BPSK	1	1	11.76	11.93	11.82	0
40M	DFT-S QPSK	1	1	11.78	11.95	11.84	0
		1	108	11.74	11.91	11.80	0
		1	214	11.71	11.88	11.77	0
		108	0	10.71	10.84	10.75	1
		108	54	11.75	11.92	11.81	0
		108	108	10.71	10.83	10.74	1
		216	0	10.70	10.85	10.74	1
40M	DFT-S 16QAM	1	1	10.70	10.82	10.73	1
40M	DFT-S 64QAM	1	1	9.25	9.42	9.31	2.5
40M	DFT-S 256QAM	1	1	7.20	7.33	7.23	4.5
40M	CP QPSK	1	1	10.24	10.41	10.30	1.5
BW	MCS Index	Channel		345000	349000	353000	3GPP MPR
		Frequency (MHz)		1725	1745	1765	
30M	DFT-S PI/2 BPSK	1	1	11.71	11.86	11.78	0
30M	DFT-S QPSK	1	1	11.69	11.94	11.79	0
		1	80	11.70	11.84	11.71	0
		1	158	11.70	11.88	11.71	0
		80	0	10.71	10.83	10.73	1
		80	40	11.70	11.82	11.78	0
		80	80	10.71	10.79	10.73	1
		160	0	10.69	10.85	10.74	1
30M	DFT-S 16QAM	1	1	10.74	10.80	10.71	1
30M	DFT-S 64QAM	1	1	9.25	9.34	9.26	2.5
30M	DFT-S 256QAM	1	1	7.21	7.30	7.24	4.5
30M	CP QPSK	1	1	10.23	10.36	10.26	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 66

BW	MCS Index	Channel		344500	349000	353500	3GPP MPR
		Frequency (MHz)		1722.5	1745	1767.5	
25M	DFT-S PI/2 BPSK	1	1	11.71	11.93	11.82	0
25M	DFT-S QPSK	1	1	11.75	11.93	11.79	0
		1	67	11.74	11.82	11.71	0
		1	131	11.72	11.87	11.72	0
		64	0	10.71	10.82	10.74	1
		64	35	11.71	11.92	11.81	0
		64	69	10.69	10.81	10.74	1
		128	0	10.73	10.81	10.73	1
25M	DFT-S 16QAM	1	1	10.74	10.82	10.77	1
25M	DFT-S 64QAM	1	1	9.19	9.33	9.30	2.5
25M	DFT-S 256QAM	1	1	7.20	7.31	7.23	4.5
25M	CP QPSK	1	1	10.22	10.32	10.29	1.5
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	11.75	11.85	11.73	0
20M	DFT-S QPSK	1	1	11.74	11.92	11.75	0
		1	53	11.71	11.86	11.78	0
		1	104	11.70	11.83	11.74	0
		50	0	10.71	10.82	10.73	1
		50	28	11.71	11.89	11.72	0
		50	56	10.72	10.84	10.73	1
		100	0	10.70	10.85	10.75	1
20M	DFT-S 16QAM	1	1	10.74	10.80	10.73	1
20M	DFT-S 64QAM	1	1	9.23	9.42	9.25	2.5
20M	DFT-S 256QAM	1	1	7.22	7.30	7.21	4.5
20M	CP QPSK	1	1	10.21	10.31	10.25	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 66

BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	11.71	11.91	11.78	0
15M	DFT-S QPSK	1	1	11.71	11.89	11.76	0
		1	40	11.72	11.87	11.77	0
		1	77	11.70	11.83	11.72	0
		36	0	10.70	10.84	10.73	1
		36	22	11.70	11.84	11.81	0
		36	43	10.75	10.80	10.73	1
		75	0	10.74	10.83	10.77	1
15M	DFT-S 16QAM	1	1	10.71	10.83	10.74	1
15M	DFT-S 64QAM	1	1	9.20	9.41	9.30	2.5
15M	DFT-S 256QAM	1	1	7.20	7.32	7.23	4.5
15M	CP QPSK	1	1	10.19	10.36	10.24	1.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	11.71	11.90	11.82	0
10M	DFT-S QPSK	1	1	11.72	11.92	11.81	0
		1	26	11.70	11.88	11.76	0
		1	50	11.71	11.85	11.75	0
		25	0	10.71	10.83	10.76	1
		25	14	11.74	11.85	11.76	0
		25	27	10.72	10.85	10.71	1
		50	0	10.76	10.82	10.73	1
10M	DFT-S 16QAM	1	1	10.69	10.81	10.73	1
10M	DFT-S 64QAM	1	1	9.22	9.42	9.22	2.5
10M	DFT-S 256QAM	1	1	7.20	7.31	7.24	4.5
10M	CP QPSK	1	1	10.20	10.36	10.29	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 66

BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	11.72	11.86	11.75	0
5M	DFT-S QPSK	1	1	11.74	11.85	11.76	0
		1	13	11.69	11.86	11.73	0
		1	23	11.72	11.86	11.72	0
		12	0	10.74	10.81	10.74	1
		12	7	11.73	11.85	11.72	0
		12	13	10.75	10.83	10.73	1
		25	0	10.70	10.79	10.72	1
5M	DFT-S 16QAM	1	1	11.71	10.81	10.71	1
5M	DFT-S 64QAM	1	1	9.21	9.37	9.29	2.5
5M	DFT-S 256QAM	1	1	7.21	7.32	7.23	4.5
5M	CP QPSK	1	1	10.22	10.35	10.25	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 71

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		134600	136100	137600	
		Frequency (MHz)		673	680.5	688	
20M	DFT-S PI/2 BPSK	1	1	17.26	17.24	17.30	0
20M	DFT-S QPSK	1	1	17.31	17.29	17.35	0
		1	53	17.25	17.23	17.29	0
		1	104	17.22	17.20	17.26	0
		50	0	16.25	16.23	16.29	1
		50	28	17.28	17.26	17.32	0
		50	56	16.21	16.19	16.25	1
		100	0	16.26	16.24	16.30	1
20M	DFT-S 16QAM	1	1	16.19	16.17	16.23	1
20M	DFT-S 64QAM	1	1	14.96	14.94	14.89	2.5
20M	DFT-S 256QAM	1	1	12.91	12.89	12.95	4.5
20M	CP QPSK	1	1	15.79	15.77	15.83	1.5
BW	MCS Index	Channel		134100	136100	138100	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	DFT-S PI/2 BPSK	1	1	17.24	17.16	17.20	0
15M	DFT-S QPSK	1	1	17.31	17.19	17.29	0
		1	40	17.15	17.13	17.21	0
		1	77	17.13	17.17	17.24	0
		36	0	16.22	16.15	16.28	1
		36	22	17.27	17.20	17.23	0
		36	43	16.18	16.13	16.25	1
		75	0	16.22	16.21	16.20	1
15M	DFT-S 16QAM	1	1	16.12	16.07	16.19	1
15M	DFT-S 64QAM	1	1	14.93	14.91	14.98	2.5
15M	DFT-S 256QAM	1	1	12.88	12.87	12.90	4.5
15M	CP QPSK	1	1	15.74	15.76	15.79	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 71

BW	MCS Index	Channel		133600	136100	138600	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	DFT-S PI/2 BPSK	1	1	17.25	17.18	17.30	0
10M	DFT-S QPSK	1	1	17.22	17.27	17.33	0
		1	26	17.20	17.18	17.21	0
		1	50	17.13	17.12	17.17	0
		25	0	16.22	16.15	16.26	1
		25	14	17.22	17.17	17.25	0
		25	27	16.16	16.12	16.22	1
		50	0	16.20	16.23	16.24	1
10M	DFT-S 16QAM	1	1	16.18	16.17	16.15	1
10M	DFT-S 64QAM	1	1	14.94	14.87	14.93	2.5
10M	DFT-S 256QAM	1	1	12.86	12.86	12.90	4.5
10M	CP QPSK	1	1	15.69	15.75	15.79	1.5
BW	MCS Index	Channel		133100	136100	139100	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	DFT-S PI/2 BPSK	1	1	17.23	17.21	17.27	0
5M	DFT-S QPSK	1	1	17.31	17.28	17.26	0
		1	13	17.19	17.17	17.25	0
		1	23	17.20	17.15	17.18	0
		12	0	16.18	16.20	16.24	1
		12	7	17.22	17.17	17.23	0
		12	13	16.15	16.15	16.15	1
		25	0	16.24	16.19	16.22	1
5M	DFT-S 16QAM	1	1	16.16	16.17	16.23	1
5M	DFT-S 64QAM	1	1	14.95	14.92	14.86	2.5
5M	DFT-S 256QAM	1	1	12.86	12.80	12.87	4.5
5M	CP QPSK	1	1	15.71	15.72	15.76	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 38

BW	MCS Index	Channel		516000	519000	522000	3GPP MPR
		Frequency (MHz)		2580	2595	2610	
20M	DFT-S PI/2 BPSK	1	1	11.39	11.26	11.32	0
20M	DFT-S QPSK	1	1	11.41	11.28	11.34	0
		1	26	11.37	11.24	11.30	0
		1	49	11.34	11.21	11.27	0
		25	0	10.29	10.16	10.22	1
		25	13	11.38	11.25	11.31	0
		25	26	10.27	10.14	10.20	1
		50	0	10.25	10.12	10.18	1
20M	DFT-S 16QAM	1	1	10.21	10.08	10.14	1
20M	DFT-S 64QAM	1	1	8.73	8.60	8.66	2.5
20M	DFT-S 256QAM	1	1	6.67	6.54	6.60	4.5
20M	CP QPSK	1	1	9.65	9.52	9.58	1.5
BW	MCS Index	Channel		515500	519000	522500	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	DFT-S PI/2 BPSK	1	1	11.37	11.19	11.31	0
15M	DFT-S QPSK	1	1	11.37	11.24	11.29	0
		1	19	11.34	11.15	11.20	0
		1	36	11.29	11.14	11.23	0
		18	0	10.29	10.13	10.18	1
		18	10	11.33	11.17	11.27	0
		18	20	10.20	10.06	10.18	1
		36	0	10.16	10.08	10.17	1
15M	DFT-S 16QAM	1	1	10.11	10.07	10.10	1
15M	DFT-S 64QAM	1	1	8.67	8.55	8.62	2.5
15M	DFT-S 256QAM	1	1	6.60	6.48	6.60	4.5
15M	CP QPSK	1	1	9.65	9.48	9.52	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 38

BW	MCS Index	Channel		515000	519000	523000	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	DFT-S PI/2 BPSK	1	1	11.30	11.18	11.25	0
10M	DFT-S QPSK	1	1	11.32	11.13	11.24	0
		1	11	11.28	11.02	11.19	0
		1	22	11.18	11.06	11.20	0
		12	0	10.17	10.00	10.12	1
		12	6	11.25	11.17	11.13	0
		12	12	10.07	10.01	10.06	1
		24	0	10.10	10.00	10.11	1
10M	DFT-S 16QAM	1	1	10.11	9.96	10.08	1
10M	DFT-S 64QAM	1	1	8.58	8.51	8.60	2.5
10M	DFT-S 256QAM	1	1	6.55	6.38	6.50	4.5
10M	CP QPSK	1	1	9.63	9.35	9.39	1.5

NR Conducted Power_ENDC_Tablet_Ant 0									
NR Band 41									
BW	MCS Index	Channel		507204	509304	518598	500298	529998	3GPP MPR
		Frequency (MHz)		2536.02	2546.52	2592.99	2621.49	2649.99	
80M	DFT-S PI/2 BPSK	1	1	12.39	12.95	12.79	12.61	12.93	0
80M	DFT-S QPSK	1	1	12.41	12.97	12.81	12.63	12.95	0
		1	109	12.30	12.86	12.70	12.52	12.84	0
		1	215	12.29	12.85	12.69	12.51	12.83	0
		108	0	11.23	11.79	11.63	11.45	11.77	1
		108	55	12.32	12.88	12.72	12.54	12.86	0
		108	109	11.19	11.75	11.59	11.41	11.73	1
		216	0	11.20	11.76	11.60	11.42	11.74	1
80M	DFT-S 16QAM	1	1	11.15	11.71	11.55	11.37	11.69	1
80M	DFT-S 64QAM	1	1	9.83	10.39	10.23	10.05	10.37	2.5
80M	DFT-S 256QAM	1	1	7.86	8.42	8.26	8.08	8.40	4.5
80M	CP QPSK	1	1	10.82	11.38	11.22	11.04	11.36	1.5
BW	MCS Index	Channel		506202	512400	518598	524802	531000	3GPP MPR
		Frequency (MHz)		2531.01	2562	2592.99	2624.01	2655	
70M	DFT-S PI/2 BPSK	1	1	12.35	12.95	12.78	12.59	12.84	0
70M	DFT-S QPSK	1	1	12.34	12.90	12.74	12.59	12.95	0
		1	95	12.24	12.82	12.61	12.46	12.78	0
		1	187	12.28	12.85	12.59	12.44	12.77	0
		90	0	11.21	11.76	11.60	11.36	11.70	1
		90	50	12.32	12.82	12.64	12.46	12.78	0
		90	99	11.15	11.66	11.57	11.34	11.66	1
		180	0	11.12	11.68	11.51	11.42	11.72	1
70M	DFT-S 16QAM	1	1	11.05	11.66	11.49	11.30	11.64	1
70M	DFT-S 64QAM	1	1	9.79	10.38	10.21	10.01	10.30	2.5
70M	DFT-S 256QAM	1	1	7.84	8.41	8.19	8.01	8.30	4.5
70M	CP QPSK	1	1	10.73	11.29	11.17	10.99	11.31	1.5

NR Conducted Power_ENDC_Tablet_Ant 0									
NR Band 41									
BW	MCS Index	Channel		505200	511896	518598	525294	531996	3GPP MPR
		Frequency (MHz)		2526	2559.48	2592.99	2626.48	2659.98	
60M	DFT-S PI/2 BPSK	1	1	12.26	12.94	12.67	12.49	12.79	0
60M	DFT-S QPSK	1	1	12.26	12.83	12.63	12.51	12.91	0
		1	81	12.09	12.67	12.55	12.41	12.77	0
		1	160	12.26	12.81	12.49	12.43	12.77	0
		81	0	11.21	11.70	11.55	11.27	11.68	1
		81	41	12.27	12.73	12.57	12.41	12.78	0
		81	81	11.07	11.55	11.51	11.29	11.63	1
		162	0	11.00	11.62	11.47	11.33	11.67	1
60M	DFT-S 16QAM	1	1	10.98	11.61	11.38	11.26	11.59	1
60M	DFT-S 64QAM	1	1	9.70	10.33	10.13	10.00	10.29	2.5
60M	DFT-S 256QAM	1	1	7.72	8.39	8.19	8.00	8.24	4.5
60M	CP QPSK	1	1	10.62	11.21	11.12	10.90	11.31	1.5
BW	MCS Index	Channel		504204	511404	518598	525798	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.02	2592.99	2628.99	2664.99	
50M	DFT-S PI/2 BPSK	1	1	12.29	12.92	12.63	12.41	12.73	0
50M	DFT-S QPSK	1	1	12.23	12.78	12.59	12.45	12.89	0
		1	67	12.22	12.69	12.51	12.37	12.69	0
		1	131	12.13	12.84	12.41	12.34	12.74	0
		64	0	11.11	11.71	11.40	11.26	11.62	1
		64	35	12.24	12.82	12.47	12.36	12.69	0
		64	69	11.03	11.62	11.51	11.23	11.62	1
		128	0	11.08	11.59	11.41	11.23	11.61	1
50M	DFT-S 16QAM	1	1	10.95	11.57	11.39	11.21	11.51	1
50M	DFT-S 64QAM	1	1	9.74	10.28	10.08	9.96	10.20	2.5
50M	DFT-S 256QAM	1	1	7.69	8.26	8.13	7.90	8.20	4.5
50M	CP QPSK	1	1	10.73	11.22	11.14	10.80	11.25	1.5

NR Conducted Power_ENDC_Tablet_Ant 0									
NR Band 41									
BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	12.23	12.87	12.72	12.39	12.66	0
40M	DFT-S QPSK	1	1	12.20	12.77	12.73	12.44	12.88	0
		1	53	12.17	12.82	12.51	12.30	12.66	0
		1	104	12.27	12.83	12.55	12.28	12.70	0
		50	0	11.16	11.62	11.53	11.22	11.52	1
		50	28	12.25	12.74	12.57	12.28	12.67	0
		50	56	11.11	11.63	11.53	11.14	11.55	1
		100	0	11.05	11.58	11.41	11.20	11.59	1
40M	DFT-S 16QAM	1	1	10.95	11.56	11.38	11.13	11.41	1
40M	DFT-S 64QAM	1	1	9.67	10.32	10.10	9.89	10.13	2.5
40M	DFT-S 256QAM	1	1	7.81	8.27	8.07	7.86	8.15	4.5
40M	CP QPSK	1	1	10.67	11.15	11.05	10.73	11.19	1.5
BW	MCS Index	Channel		502200	510396	518598	526794	534996	3GPP MPR
		Frequency (MHz)		2511	2551.98	2592.99	2633.97	2674.98	
30M	DFT-S PI/2 BPSK	1	1	12.30	12.94	12.67	12.32	12.61	0
30M	DFT-S QPSK	1	1	12.34	12.82	12.62	12.43	12.81	0
		1	39	12.15	12.76	12.55	12.25	12.61	0
		1	76	12.26	12.77	12.57	12.23	12.66	0
		36	0	11.08	11.62	11.50	11.13	11.51	1
		36	21	12.17	12.72	12.49	12.25	12.61	0
		36	42	11.04	11.53	11.42	11.12	11.45	1
		75	0	10.99	11.63	11.44	11.16	11.55	1
30M	DFT-S 16QAM	1	1	10.96	11.58	11.40	11.08	11.32	1
30M	DFT-S 64QAM	1	1	9.68	10.26	10.12	9.80	10.07	2.5
30M	DFT-S 256QAM	1	1	7.71	8.41	8.07	7.86	8.11	4.5
30M	CP QPSK	1	1	10.65	11.25	11.06	10.71	11.15	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 41

BW	MCS Index	Channel		501204	509898	518598	527298	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.49	2592.99	2636.49	2679.99	
20M	DFT-S PI/2 BPSK	1	1	12.30	12.88	12.72	12.53	12.91	0
20M	DFT-S QPSK	1	1	12.32	12.87	12.73	12.61	12.90	0
		1	26	12.23	12.81	12.70	12.45	12.84	0
		1	49	12.28	12.84	12.69	12.50	12.81	0
		25	0	11.16	11.79	11.57	11.40	11.77	1
		25	13	12.22	12.82	12.70	12.46	12.86	0
		25	26	11.17	11.65	11.59	11.40	11.65	1
		50	0	11.13	11.68	11.52	11.34	11.71	1
20M	DFT-S 16QAM	1	1	11.09	11.63	11.55	11.27	11.60	1
20M	DFT-S 64QAM	1	1	9.73	10.34	10.23	9.96	10.36	2.5
20M	DFT-S 256QAM	1	1	7.80	8.41	8.20	8.04	8.35	4.5
20M	CP QPSK	1	1	10.78	11.30	11.15	11.01	11.35	1.5
BW	MCS Index	Channel		500700	509646	518598	527544	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.23	2592.99	2637.72	2682.48	
15M	DFT-S PI/2 BPSK	1	1	12.24	12.76	12.59	12.50	12.82	0
15M	DFT-S QPSK	1	1	12.29	12.78	12.58	12.53	12.90	0
		1	19	12.22	12.67	12.66	12.41	12.78	0
		1	36	12.24	12.76	12.64	12.47	12.79	0
		18	0	11.04	11.64	11.55	11.31	11.72	1
		18	10	12.09	12.75	12.55	12.43	12.84	0
		18	20	11.17	11.64	11.55	11.38	11.58	1
		36	0	11.13	11.57	11.43	11.30	11.61	1
15M	DFT-S 16QAM	1	1	11.09	11.50	11.43	11.18	11.50	1
15M	DFT-S 64QAM	1	1	9.71	10.33	10.17	9.92	10.29	2.5
15M	DFT-S 256QAM	1	1	7.73	8.36	8.17	7.99	8.35	4.5
15M	CP QPSK	1	1	10.74	11.28	11.00	11.01	11.25	1.5

NR Conducted Power_ENDC_Tablet_Ant 0									
NR Band 41									
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	12.28	12.83	12.58	12.42	12.75	0
10M	DFT-S QPSK	1	1	12.17	12.80	12.44	12.50	12.80	0
		1	11	12.16	12.70	12.64	12.38	12.70	0
		1	22	12.15	12.76	12.54	12.46	12.77	0
		12	0	11.16	11.68	11.43	11.29	11.70	1
		12	6	12.12	12.67	12.45	12.35	12.76	0
		12	12	11.15	11.59	11.44	11.38	11.52	1
		24	0	11.05	11.68	11.38	11.25	11.58	1
10M	DFT-S 16QAM	1	1	11.07	11.48	11.42	11.08	11.45	1
10M	DFT-S 64QAM	1	1	9.61	10.32	10.19	9.84	10.21	2.5
10M	DFT-S 256QAM	1	1	7.77	8.37	8.08	7.90	8.35	4.5
10M	CP QPSK	1	1	10.77	11.28	11.13	10.98	11.15	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		640000	641110	642222	643332	
		Frequency (MHz)		3600	3616.65	3633.33	3649.98	
100M	DFT-S PI/2 BPSK	1	1	10.31	10.36	9.94	10.22	0
100M	DFT-S QPSK	1	1	10.41	10.46	10.04	10.32	0
		1	137	10.29	10.34	9.92	10.20	0
		1	271	10.26	10.31	9.89	10.17	0
		135	0	9.33	9.38	8.96	9.24	1
		135	69	10.23	10.28	9.86	10.14	0
		135	138	9.30	9.35	8.93	9.21	1
		270	0	9.26	9.31	8.89	9.17	1
100M	DFT-S 16QAM	1	1	9.22	9.27	8.85	9.13	1
100M	DFT-S 64QAM	1	1	7.33	7.38	6.96	7.24	2.5
100M	DFT-S 256QAM	1	1	5.71	5.76	5.34	5.62	4.5
100M	CP QPSK	1	1	8.80	8.85	8.43	8.71	1.5
BW	MCS Index	Channel		639668	641000	642332	643666	3GPP MPR
		Frequency (MHz)		3595.02	3615	3634.98	3654.99	
90M	DFT-S PI/2 BPSK	1	1	10.27	10.34	9.88	10.15	0
90M	DFT-S QPSK	1	1	10.38	10.37	9.95	10.30	0
		1	123	10.19	10.27	9.88	10.12	0
		1	243	10.25	10.21	9.85	10.07	0
		120	0	9.33	9.34	8.86	9.22	1
		120	63	10.21	10.26	9.82	10.10	0
		120	125	9.21	9.31	8.93	9.14	1
		243	0	9.21	9.31	8.86	9.11	1
90M	DFT-S 16QAM	1	1	9.15	9.20	8.80	9.12	1
90M	DFT-S 64QAM	1	1	7.33	7.33	6.94	7.16	2.5
90M	DFT-S 256QAM	1	1	5.68	5.72	5.31	5.52	4.5
90M	CP QPSK	1	1	8.78	8.77	8.38	8.66	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 48

BW	MCS Index	Channel		639334	640888	642444	644000	3GPP MPR
		Frequency (MHz)		3590.01	3613.32	3636.66	3660	
80M	DFT-S PI/2 BPSK	1	1	10.13	10.28	9.79	10.11	0
80M	DFT-S QPSK	1	1	10.24	10.24	9.95	10.30	0
		1	109	10.05	10.16	9.76	10.08	0
		1	215	10.15	10.07	9.71	10.04	0
		108	0	9.30	9.20	8.84	9.22	1
		108	55	10.09	10.22	9.67	10.01	0
		108	109	9.07	9.29	8.84	9.04	1
		216	0	9.17	9.27	8.72	9.05	1
80M	DFT-S 16QAM	1	1	9.09	9.18	8.73	9.06	1
80M	DFT-S 64QAM	1	1	7.18	7.26	6.91	7.16	2.5
80M	DFT-S 256QAM	1	1	5.61	5.69	5.29	5.47	4.5
80M	CP QPSK	1	1	8.75	8.67	8.29	8.56	1.5
BW	MCS Index	Channel		639000	640778	642548	644332	3GPP MPR
		Frequency (MHz)		3585	3611.67	3638.22	3664.98	
70M	DFT-S PI/2 BPSK	1	1	10.26	10.28	9.77	10.03	0
70M	DFT-S QPSK	1	1	10.37	10.29	9.80	10.29	0
		1	95	10.13	10.18	9.74	9.99	0
		1	187	10.21	10.10	9.71	9.94	0
		90	0	9.25	9.33	8.79	9.18	1
		90	50	10.13	10.19	9.54	10.01	0
		90	99	9.20	9.21	8.76	8.99	1
		180	0	9.13	9.24	8.81	9.03	1
70M	DFT-S 16QAM	1	1	9.11	9.06	8.72	9.03	1
70M	DFT-S 64QAM	1	1	7.33	7.21	6.83	7.08	2.5
70M	DFT-S 256QAM	1	1	5.53	5.61	5.26	5.43	4.5
70M	CP QPSK	1	1	8.71	8.76	8.23	8.55	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 48

BW	MCS Index	Channel		638668	640666	642666	644666	3GPP MPR
		Frequency (MHz)		3580.02	3609.99	3639.99	3669.99	
60M	DFT-S PI/2 BPSK	1	1	10.16	10.33	9.83	10.02	0
60M	DFT-S QPSK	1	1	10.28	10.35	9.86	10.29	0
		1	81	10.09	10.27	9.83	9.91	0
		1	160	10.21	10.16	9.77	9.93	0
		81	0	9.29	9.22	8.71	9.09	1
		81	41	10.20	10.20	9.75	9.99	0
		81	81	9.20	9.20	8.88	8.96	1
		162	0	9.08	9.21	8.79	9.03	1
60M	DFT-S 16QAM	1	1	9.13	9.05	8.75	8.97	1
60M	DFT-S 64QAM	1	1	7.26	7.32	6.88	7.06	2.5
60M	DFT-S 256QAM	1	1	5.59	5.60	5.23	5.34	4.5
60M	CP QPSK	1	1	8.64	8.62	8.33	8.53	1.5
BW	MCS Index	Channel		638334	640556	642778	645000	3GPP MPR
		Frequency (MHz)		3575.01	3608.34	3641.67	3675	
50M	DFT-S PI/2 BPSK	1	1	10.22	10.30	9.89	10.22	0
50M	DFT-S QPSK	1	1	10.37	10.39	10.01	10.27	0
		1	67	10.22	10.31	9.83	10.12	0
		1	131	10.18	10.24	9.79	10.11	0
		64	0	9.24	9.32	8.89	9.24	1
		64	35	10.20	10.18	9.85	10.12	0
		64	69	9.23	9.29	8.91	9.21	1
		128	0	9.19	9.25	8.86	9.08	1
50M	DFT-S 16QAM	1	1	9.12	9.24	8.85	9.03	1
50M	DFT-S 64QAM	1	1	7.33	7.33	6.94	7.20	2.5
50M	DFT-S 256QAM	1	1	5.70	5.73	5.24	5.55	4.5
50M	CP QPSK	1	1	8.74	8.81	8.34	8.70	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 48

BW	MCS Index	Channel		638000	640444	642888	645332	3GPP MPR
		Frequency (MHz)		3570	3606.66	3643.32	3679.98	
40M	DFT-S PI/2 BPSK	1	1	10.25	10.25	9.88	9.96	0
40M	DFT-S QPSK	1	1	10.31	10.37	9.84	10.20	0
		1	53	10.19	10.22	9.85	9.91	0
		1	104	10.23	10.18	9.73	9.84	0
		50	0	9.27	9.19	8.82	9.00	1
		50	28	10.11	10.15	9.68	9.97	0
		50	56	9.16	9.27	8.89	8.96	1
		100	0	9.21	9.29	8.81	9.00	1
40M	DFT-S 16QAM	1	1	9.06	9.12	8.80	8.87	1
40M	DFT-S 64QAM	1	1	7.31	7.28	6.82	6.99	2.5
40M	DFT-S 256QAM	1	1	5.67	5.61	5.24	5.28	4.5
40M	CP QPSK	1	1	8.66	8.64	8.26	8.50	1.5
BW	MCS Index	Channel		637334	640222	643110	646000	3GPP MPR
		Frequency (MHz)		3560.01	3603.33	3646.65	3690	
20M	DFT-S PI/2 BPSK	1	1	10.19	10.29	9.81	10.12	0
20M	DFT-S QPSK	1	1	10.24	10.39	9.91	10.22	0
		1	26	10.21	10.17	9.73	10.08	0
		1	49	10.06	10.20	9.69	10.02	0
		25	0	9.19	9.26	8.77	9.19	1
		25	13	10.14	10.16	9.83	10.08	0
		25	26	9.20	9.23	8.79	9.16	1
		50	0	9.17	9.17	8.73	9.01	1
20M	DFT-S 16QAM	1	1	9.00	9.12	8.78	8.98	1
20M	DFT-S 64QAM	1	1	7.25	7.21	6.92	7.11	2.5
20M	DFT-S 256QAM	1	1	5.64	5.72	5.18	5.50	4.5
20M	CP QPSK	1	1	8.68	8.70	8.30	8.66	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 48

BW	MCS Index	Channel		637168	640168	643166	646166	3GPP MPR
		Frequency (MHz)		3557.52	3602.52	3647.49	3692.49	
15M	DFT-S PI/2 BPSK	1	1	10.19	10.23	9.71	10.05	0
15M	DFT-S QPSK	1	1	10.25	10.30	9.85	10.15	0
		1	19	10.15	10.22	9.65	10.03	0
		1	36	10.11	10.18	9.69	9.97	0
		18	0	9.15	9.18	8.63	9.12	1
		18	10	10.05	10.09	9.80	10.00	0
		18	20	9.08	9.20	8.77	9.13	1
		36	0	9.15	9.11	8.72	8.96	1
15M	DFT-S 16QAM	1	1	9.00	9.24	8.85	8.98	1
15M	DFT-S 64QAM	1	1	7.23	7.33	6.80	7.11	2.5
15M	DFT-S 256QAM	1	1	5.60	5.62	5.17	5.48	4.5
15M	CP QPSK	1	1	8.67	8.72	8.28	8.61	1.5
BW	MCS Index	Channel		637000	640110	643222	646332	3GPP MPR
		Frequency (MHz)		3555	3601.65	3648.33	3694.98	
10M	DFT-S PI/2 BPSK	1	1	10.07	10.27	9.80	10.02	0
10M	DFT-S QPSK	1	1	10.29	10.37	9.93	10.13	0
		1	11	10.12	10.16	9.78	9.93	0
		1	22	10.12	10.22	9.73	9.87	0
		12	0	9.13	9.18	8.77	9.10	1
		12	6	10.16	10.06	9.75	9.93	0
		12	12	9.21	9.18	8.79	9.03	1
		24	0	9.17	9.11	8.74	8.88	1
10M	DFT-S 16QAM	1	1	8.98	9.14	8.85	8.92	1
10M	DFT-S 64QAM	1	1	7.24	7.33	6.88	7.04	2.5
10M	DFT-S 256QAM	1	1	5.65	5.65	5.19	5.42	4.5
10M	CP QPSK	1	1	8.62	8.73	8.32	8.56	1.5

NR Conducted Power_ENDC_Tablet_Ant 0									
NR Band 77									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	9.79	9.86	9.69	9.65	9.96	0
100M	DFT-S QPSK	1	1	9.81	9.88	9.71	9.67	9.99	0
		1	137	9.78	9.85	9.68	9.64	9.95	0
		1	271	9.76	9.83	9.66	9.62	9.93	0
		135	0	8.72	8.79	8.62	8.58	8.89	1
		135	69	9.79	9.86	9.69	9.65	9.96	0
		135	138	8.70	8.77	8.60	8.56	8.87	1
		270	0	8.68	8.75	8.58	8.54	8.85	1
100M	DFT-S 16QAM	1	1	8.64	8.71	8.54	8.50	8.81	1
100M	DFT-S 64QAM	1	1	7.25	7.32	7.15	7.11	7.42	2.5
100M	DFT-S 256QAM	1	1	5.18	5.25	5.08	5.04	5.35	4.5
100M	CP QPSK	1	1	8.28	8.35	8.18	8.14	8.45	1.5
BW	MCS Index	Channel		649668	652834	656000	659166	662332	3GPP MPR
		Frequency (MHz)		3745.02	3792.51	3840	3887.49	3934.98	
90M	DFT-S PI/2 BPSK	1	1	9.72	9.81	9.61	9.60	9.94	0
90M	DFT-S QPSK	1	1	9.78	9.83	9.65	9.58	9.90	0
		1	123	9.70	9.78	9.67	9.60	9.85	0
		1	243	9.68	9.75	9.56	9.55	9.86	0
		120	0	8.63	8.78	8.52	8.50	8.88	1
		120	63	9.70	9.79	9.67	9.57	9.94	0
		120	125	8.61	8.67	8.59	8.54	8.87	1
		243	0	8.66	8.70	8.56	8.47	8.79	1
90M	DFT-S 16QAM	1	1	8.56	8.66	8.46	8.43	8.74	1
90M	DFT-S 64QAM	1	1	7.18	7.28	7.13	7.06	7.42	2.5
90M	DFT-S 256QAM	1	1	5.16	5.16	5.04	4.95	5.29	4.5
90M	CP QPSK	1	1	8.23	8.29	8.13	8.13	8.38	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 77

BW	MCS Index	Channel		649334	652666	656000	659334	662666	3GPP MPR
		Frequency (MHz)		3740.01	3789.99	3840	3890.01	3939.99	
80M	DFT-S PI/2 BPSK	1	1	9.57	9.76	9.60	9.57	9.87	0
80M	DFT-S QPSK	1	1	9.66	9.81	9.54	9.58	9.84	0
		1	109	9.60	9.71	9.61	9.60	9.78	0
		1	215	9.59	9.66	9.48	9.52	9.85	0
		108	0	8.63	8.70	8.50	8.43	8.81	1
		108	55	9.62	9.72	9.67	9.47	9.88	0
		108	109	8.60	8.65	8.58	8.44	8.81	1
		216	0	8.56	8.55	8.54	8.43	8.69	1
80M	DFT-S 16QAM	1	1	8.50	8.58	8.41	8.36	8.68	1
80M	DFT-S 64QAM	1	1	7.17	7.20	7.09	6.98	7.34	2.5
80M	DFT-S 256QAM	1	1	5.06	5.13	4.89	4.87	5.22	4.5
80M	CP QPSK	1	1	8.13	8.16	8.12	8.05	8.28	1.5
BW	MCS Index	Channel		649000	652500	656000	659500	663000	3GPP MPR
		Frequency (MHz)		3735	3787.5	3840	3892.5	3945	
70M	DFT-S PI/2 BPSK	1	1	9.65	9.68	9.46	9.47	9.81	0
70M	DFT-S QPSK	1	1	9.69	9.77	9.50	9.54	9.78	0
		1	95	9.66	9.68	9.58	9.56	9.75	0
		1	187	9.58	9.60	9.39	9.51	9.83	0
		90	0	8.59	8.73	8.35	8.37	8.71	1
		90	50	9.66	9.78	9.56	9.39	9.86	0
		90	99	8.46	8.64	8.58	8.38	8.77	1
		180	0	8.60	8.64	8.56	8.37	8.59	1
70M	DFT-S 16QAM	1	1	8.54	8.57	8.43	8.29	8.58	1
70M	DFT-S 64QAM	1	1	7.04	7.21	7.04	6.95	7.27	2.5
70M	DFT-S 256QAM	1	1	5.05	5.03	5.02	4.78	5.19	4.5
70M	CP QPSK	1	1	8.21	8.24	7.99	8.02	8.23	1.5

NR Conducted Power_ENDC_Tablet_Ant 0									
NR Band 77									
BW	MCS Index	Channel		648668	652334	656000	659666	663332	3GPP MPR
		Frequency (MHz)		3730.02	3785.01	3840	3894.99	3949.98	
60M	DFT-S PI/2 BPSK	1	1	9.71	9.70	9.60	9.40	9.72	0
60M	DFT-S QPSK	1	1	9.77	9.75	9.63	9.48	9.74	0
		1	81	9.68	9.71	9.60	9.52	9.67	0
		1	160	9.68	9.74	9.51	9.51	9.79	0
		81	0	8.55	8.66	8.44	8.30	8.65	1
		81	41	9.68	9.73	9.61	9.39	9.79	0
		81	81	8.60	8.53	8.58	8.31	8.75	1
		162	0	8.54	8.56	8.48	8.35	8.49	1
60M	DFT-S 16QAM	1	1	8.56	8.56	8.33	8.20	8.48	1
60M	DFT-S 64QAM	1	1	7.09	7.20	7.09	6.87	7.20	2.5
60M	DFT-S 256QAM	1	1	5.03	5.08	4.94	4.69	5.09	4.5
60M	CP QPSK	1	1	8.10	8.27	8.10	7.98	8.18	1.5
BW	MCS Index	Channel		648334	652166	656000	659834	663666	3GPP MPR
		Frequency (MHz)		3725.01	3782.49	3840	3897.51	3954.99	
50M	DFT-S PI/2 BPSK	1	1	9.60	9.79	9.50	9.30	9.67	0
50M	DFT-S QPSK	1	1	9.71	9.78	9.55	9.47	9.69	0
		1	67	9.68	9.76	9.64	9.50	9.61	0
		1	131	9.65	9.63	9.52	9.48	9.73	0
		64	0	8.63	8.77	8.51	8.28	8.61	1
		64	35	9.64	9.78	9.52	9.34	9.72	0
		64	69	8.54	8.56	8.52	8.26	8.68	1
		128	0	8.60	8.65	8.45	8.34	8.40	1
50M	DFT-S 16QAM	1	1	8.47	8.53	8.38	8.17	8.39	1
50M	DFT-S 64QAM	1	1	7.05	7.14	6.98	6.87	7.20	2.5
50M	DFT-S 256QAM	1	1	5.09	5.14	4.89	4.67	4.99	4.5
50M	CP QPSK	1	1	8.15	8.29	8.08	7.88	8.09	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 77

BW	MCS Index	Channel		648000	652000	656000	660000	664000	3GPP MPR
		Frequency (MHz)		3720	3780	3840	3900	3960	
40M	DFT-S PI/2 BPSK	1	1	9.74	9.74	9.55	9.45	9.75	0
40M	DFT-S QPSK	1	1	9.58	9.80	9.54	9.48	9.81	0
		1	53	9.59	9.73	9.58	9.40	9.78	0
		1	104	9.63	9.72	9.56	9.36	9.77	0
		50	0	8.49	8.68	8.53	8.31	8.75	1
		50	28	9.73	9.84	9.69	9.46	9.74	0
		50	56	8.59	8.62	8.49	8.33	8.57	1
		100	0	8.57	8.66	8.35	8.34	8.59	1
40M	DFT-S 16QAM	1	1	8.51	8.51	8.35	8.31	8.45	1
40M	DFT-S 64QAM	1	1	7.11	7.20	6.99	6.78	7.19	2.5
40M	DFT-S 256QAM	1	1	5.08	5.20	4.95	4.88	5.14	4.5
40M	CP QPSK	1	1	8.21	8.26	8.01	7.89	8.20	1.5
BW	MCS Index	Channel		647668	651834	656000	660166	664332	3GPP MPR
		Frequency (MHz)		3715.02	3777.51	3840	3902.49	3964.98	
30M	DFT-S PI/2 BPSK	1	1	9.64	9.76	9.63	9.53	9.76	0
30M	DFT-S QPSK	1	1	9.62	9.73	9.54	9.56	9.83	0
		1	39	9.56	9.69	9.65	9.45	9.82	0
		1	76	9.66	9.72	9.50	9.45	9.82	0
		36	0	8.58	8.64	8.54	8.33	8.76	1
		36	21	9.66	9.78	9.58	9.49	9.75	0
		36	42	8.60	8.63	8.45	8.42	8.66	1
		75	0	8.62	8.62	8.39	8.40	8.59	1
30M	DFT-S 16QAM	1	1	8.43	8.59	8.37	8.38	8.47	1
30M	DFT-S 64QAM	1	1	7.20	7.12	7.11	6.84	7.19	2.5
30M	DFT-S 256QAM	1	1	5.01	5.21	4.90	4.90	5.20	4.5
30M	CP QPSK	1	1	8.15	8.21	8.09	7.94	8.23	1.5

NR Conducted Power_ENDC_Tablet_Ant 0									
NR Band 77									
BW	MCS Index	Channel		647500	651750	656000	660250	664500	3GPP MPR
		Frequency (MHz)		3712.5	3776.25	3840	3903.75	3967.5	
25M	DFT-S PI/2 BPSK	1	1	9.70	9.64	9.54	9.56	9.83	0
25M	DFT-S QPSK	1	1	9.66	9.75	9.46	9.56	9.85	0
		1	33	9.68	9.74	9.52	9.54	9.87	0
		1	63	9.70	9.69	9.48	9.51	9.82	0
		32	0	8.53	8.62	8.42	8.38	8.81	1
		32	17	9.64	9.72	9.50	9.52	9.78	0
		32	33	8.53	8.63	8.35	8.43	8.74	1
		64	0	8.59	8.65	8.41	8.40	8.69	1
25M	DFT-S 16QAM	1	1	8.56	8.64	8.38	8.41	8.56	1
25M	DFT-S 64QAM	1	1	7.07	7.16	7.06	6.93	7.27	2.5
25M	DFT-S 256QAM	1	1	5.06	5.16	4.99	4.91	5.21	4.5
25M	CP QPSK	1	1	8.15	8.18	8.02	8.00	8.30	1.5
BW	MCS Index	Channel		647334	651666	656000	660266	664666	3GPP MPR
		Frequency (MHz)		3710.01	3774.99	3840	3903.99	3969.99	
20M	DFT-S PI/2 BPSK	1	1	9.73	9.73	9.61	9.65	9.85	0
20M	DFT-S QPSK	1	1	9.59	9.78	9.58	9.62	9.94	0
		1	26	9.70	9.62	9.60	9.55	9.91	0
		1	49	9.67	9.69	9.49	9.56	9.85	0
		25	0	8.51	8.68	8.47	8.48	8.81	1
		25	13	9.77	9.83	9.64	9.60	9.82	0
		25	26	8.47	8.60	8.44	8.50	8.74	1
		50	0	8.55	8.54	8.47	8.46	8.78	1
20M	DFT-S 16QAM	1	1	8.55	8.65	8.38	8.45	8.62	1
20M	DFT-S 64QAM	1	1	7.18	7.18	7.05	6.98	7.28	2.5
20M	DFT-S 256QAM	1	1	4.96	5.24	5.04	4.92	5.25	4.5
20M	CP QPSK	1	1	8.19	8.28	7.98	8.09	8.37	1.5

NR Conducted Power_ENDC_Tablet_Ant 0									
NR Band 77									
BW	MCS Index	Channel		647168	651584	656000	660416	664832	3GPP MPR
		Frequency (MHz)		3707.52	3773.76	3840	3906.24	3972.48	
15M	DFT-S PI/2 BPSK	1	1	9.77	9.78	9.63	9.65	9.93	0
15M	DFT-S QPSK	1	1	9.72	9.82	9.67	9.62	9.98	0
		1	19	9.70	9.75	9.66	9.59	9.93	0
		1	36	9.75	9.78	9.63	9.61	9.88	0
		18	0	8.62	8.73	8.54	8.57	8.85	1
		18	10	9.77	9.86	9.69	9.64	9.90	0
		18	20	8.62	8.73	8.57	8.54	8.79	1
		36	0	8.64	8.68	8.49	8.49	8.84	1
15M	DFT-S 16QAM	1	1	8.57	8.65	8.50	8.47	8.72	1
15M	DFT-S 64QAM	1	1	7.20	7.22	7.13	7.03	7.36	2.5
15M	DFT-S 256QAM	1	1	5.10	5.24	5.05	5.02	5.33	4.5
15M	CP QPSK	1	1	8.28	8.33	8.12	8.09	8.45	1.5
BW	MCS Index	Channel		647000	651500	656000	660500	665000	3GPP MPR
		Frequency (MHz)		3705	3772.5	3840	3907.5	3975	
10M	DFT-S PI/2 BPSK	1	1	9.78	9.80	9.66	9.57	9.89	0
10M	DFT-S QPSK	1	1	9.74	9.82	9.62	9.65	9.98	0
		1	11	9.78	9.84	9.67	9.64	9.85	0
		1	22	9.74	9.75	9.62	9.59	9.91	0
		12	0	8.64	8.75	8.62	8.52	8.86	1
		12	6	9.70	9.77	9.68	9.59	9.90	0
		12	12	8.67	8.77	8.51	8.55	8.85	1
		24	0	8.63	8.69	8.55	8.44	8.77	1
10M	DFT-S 16QAM	1	1	8.64	8.62	8.51	8.47	8.80	1
10M	DFT-S 64QAM	1	1	7.16	7.31	7.12	7.08	7.41	2.5
10M	DFT-S 256QAM	1	1	5.08	5.20	5.03	4.97	5.33	4.5
10M	CP QPSK	1	1	8.23	8.31	8.08	8.09	8.45	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 78

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		8.52		0
100M	DFT-S QPSK	1	1		8.53		0
		1	137		8.49		0
		1	271		8.46		0
		135	0		7.55		1
		135	69		8.51		0
		135	138		7.52		1
		270	0		7.48		1
100M	DFT-S 16QAM	1	1		7.45		1
100M	DFT-S 64QAM	1	1		6.06		2.5
100M	DFT-S 256QAM	1	1		4.12		4.5
100M	CP QPSK	1	1		7.04		1.5
BW	MCS Index	Channel		649668	650000	650332	3GPP MPR
		Frequency (MHz)		3745.02	3750	3754.98	
90M	DFT-S PI/2 BPSK	1	1	8.43	8.48	8.38	0
90M	DFT-S QPSK	1	1	8.44	8.46	8.44	0
		1	123	8.38	8.45	8.32	0
		1	243	8.39	8.42	8.37	0
		120	0	7.41	7.51	7.40	1
		120	63	8.38	8.51	8.41	0
		120	125	7.47	7.43	7.43	1
		243	0	7.41	7.38	7.35	1
90M	DFT-S 16QAM	1	1	7.37	7.42	7.30	1
90M	DFT-S 64QAM	1	1	6.02	5.96	5.95	2.5
90M	DFT-S 256QAM	1	1	3.99	4.07	4.04	4.5
90M	CP QPSK	1	1	6.95	7.03	6.86	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 78

BW	MCS Index	Channel		649334	650000	650666	3GPP MPR
		Frequency (MHz)		3740.01	3750	3759.99	
80M	DFT-S PI/2 BPSK	1	1	8.42	8.37	8.34	0
80M	DFT-S QPSK	1	1	8.43	8.32	8.31	0
		1	109	8.29	8.43	8.28	0
		1	215	8.26	8.38	8.34	0
		108	0	7.31	7.41	7.37	1
		108	55	8.30	8.41	8.29	0
		108	109	7.40	7.37	7.34	1
		216	0	7.33	7.27	7.26	1
80M	DFT-S 16QAM	1	1	7.37	7.31	7.25	1
80M	DFT-S 64QAM	1	1	5.87	5.89	5.93	2.5
80M	DFT-S 256QAM	1	1	3.84	4.06	4.00	4.5
80M	CP QPSK	1	1	6.84	6.97	6.85	1.5
BW	MCS Index	Channel		649000	650000	651000	3GPP MPR
		Frequency (MHz)		3735	3750	3765	
70M	DFT-S PI/2 BPSK	1	1	8.38	8.34	8.24	0
70M	DFT-S QPSK	1	1	8.30	8.26	8.28	0
		1	95	8.28	8.24	8.18	0
		1	187	8.38	8.34	8.24	0
		90	0	7.37	7.33	7.23	1
		90	50	8.34	8.30	8.18	0
		90	99	7.37	7.33	7.31	1
		180	0	7.41	7.37	7.26	1
70M	DFT-S 16QAM	1	1	7.36	7.32	7.15	1
70M	DFT-S 64QAM	1	1	6.00	5.96	5.90	2.5
70M	DFT-S 256QAM	1	1	3.98	3.94	3.92	4.5
70M	CP QPSK	1	1	6.83	6.79	6.74	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 78

BW	MCS Index	Channel		648668	650000	651332	3GPP MPR
		Frequency (MHz)		3730.02	3750	3769.98	
60M	DFT-S PI/2 BPSK	1	1	8.39	8.41	8.34	0
60M	DFT-S QPSK	1	1	8.35	8.45	8.33	0
		1	81	8.28	8.31	8.25	0
		1	160	8.25	8.32	8.27	0
		81	0	7.29	7.44	7.28	1
		81	41	8.27	8.38	8.31	0
		81	81	7.38	7.42	7.31	1
		162	0	7.41	7.32	7.24	1
60M	DFT-S 16QAM	1	1	7.23	7.33	7.24	1
60M	DFT-S 64QAM	1	1	5.88	5.88	5.91	2.5
60M	DFT-S 256QAM	1	1	3.91	4.00	3.97	4.5
60M	CP QPSK	1	1	6.82	7.00	6.76	1.5
BW	MCS Index	Channel		648334	650000	651666	3GPP MPR
		Frequency (MHz)		3725.01	3750	3774.99	
50M	DFT-S PI/2 BPSK	1	1	8.35	8.39	8.24	0
50M	DFT-S QPSK	1	1	8.37	8.37	8.44	0
		1	67	8.30	8.41	8.31	0
		1	131	8.36	8.32	8.25	0
		64	0	7.27	7.49	7.30	1
		64	35	8.29	8.48	8.34	0
		64	69	7.42	7.38	7.43	1
		128	0	7.39	7.36	7.20	1
50M	DFT-S 16QAM	1	1	7.24	7.35	7.21	1
50M	DFT-S 64QAM	1	1	5.99	5.88	5.83	2.5
50M	DFT-S 256QAM	1	1	3.98	3.94	3.92	4.5
50M	CP QPSK	1	1	6.85	6.93	6.71	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 78

BW	MCS Index	Channel		648000	650000	652000	3GPP MPR
		Frequency (MHz)		3720	3750	3780	
40M	DFT-S PI/2 BPSK	1	1	8.40	8.37	8.21	0
40M	DFT-S QPSK	1	1	8.34	8.35	8.40	0
		1	53	8.29	8.35	8.23	0
		1	104	8.25	8.32	8.30	0
		50	0	7.33	7.30	7.34	1
		50	28	8.34	8.27	8.25	0
		50	56	7.33	7.46	7.23	1
		100	0	7.34	7.40	7.25	1
40M	DFT-S 16QAM	1	1	7.20	7.32	7.17	1
40M	DFT-S 64QAM	1	1	5.93	5.87	5.89	2.5
40M	DFT-S 256QAM	1	1	4.05	4.03	3.89	4.5
40M	CP QPSK	1	1	6.95	6.95	6.80	1.5
BW	MCS Index	Channel		647668	650000	652332	3GPP MPR
		Frequency (MHz)		3715.02	3750	3784.98	
30M	DFT-S PI/2 BPSK	1	1	8.26	8.35	8.36	0
30M	DFT-S QPSK	1	1	8.39	8.37	8.38	0
		1	39	8.42	8.37	8.28	0
		1	76	8.36	8.29	8.37	0
		36	0	7.31	7.41	7.34	1
		36	21	8.40	8.33	8.18	0
		36	42	7.38	7.32	7.28	1
		75	0	7.33	7.31	7.23	1
30M	DFT-S 16QAM	1	1	7.18	7.37	7.19	1
30M	DFT-S 64QAM	1	1	5.87	5.89	5.85	2.5
30M	DFT-S 256QAM	1	1	3.95	3.98	3.83	4.5
30M	CP QPSK	1	1	6.92	6.94	6.84	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 78

BW	MCS Index	Channel		647500	650000	652500	3GPP MPR
		Frequency (MHz)		3712.5	3750	3787.5	
25M	DFT-S PI/2 BPSK	1	1	8.40	8.33	8.17	0
25M	DFT-S QPSK	1	1	8.31	8.43	8.29	0
		1	33	8.30	8.38	8.32	0
		1	63	8.34	8.36	8.19	0
		32	0	7.32	7.33	7.27	1
		32	17	8.36	8.39	8.15	0
		32	33	7.42	7.38	7.21	1
		64	0	7.39	7.37	7.31	1
25M	DFT-S 16QAM	1	1	7.27	7.40	7.22	1
25M	DFT-S 64QAM	1	1	5.93	5.86	5.83	2.5
25M	DFT-S 256QAM	1	1	4.05	3.92	3.94	4.5
25M	CP QPSK	1	1	6.95	6.93	6.89	1.5
BW	MCS Index	Channel		647334	650000	652666	3GPP MPR
		Frequency (MHz)		3710.01	3750	3789.99	
20M	DFT-S PI/2 BPSK	1	1	8.25	8.34	8.31	0
20M	DFT-S QPSK	1	1	8.38	8.35	8.43	0
		1	26	8.29	8.31	8.34	0
		1	49	8.24	8.30	8.34	0
		25	0	7.33	7.45	7.33	1
		25	13	8.36	8.36	8.26	0
		25	26	7.36	7.38	7.31	1
		50	0	7.39	7.39	7.20	1
20M	DFT-S 16QAM	1	1	7.27	7.41	7.25	1
20M	DFT-S 64QAM	1	1	5.91	5.85	5.83	2.5
20M	DFT-S 256QAM	1	1	3.96	4.02	3.80	4.5
20M	CP QPSK	1	1	6.91	6.88	6.83	1.5

NR Conducted Power_ENDC_Tablet_Ant 0

NR Band 78

BW	MCS Index	Channel		647168	650000	652832	3GPP MPR
		Frequency (MHz)		3707.52	3750	3792.48	
15M	DFT-S PI/2 BPSK	1	1	8.40	8.47	8.36	0
15M	DFT-S QPSK	1	1	8.44	8.43	8.44	0
		1	19	8.43	8.43	8.37	0
		1	36	8.37	8.37	8.37	0
		18	0	7.41	7.45	7.38	1
		18	10	8.44	8.42	8.33	0
		18	20	7.48	7.46	7.38	1
		36	0	7.42	7.45	7.35	1
15M	DFT-S 16QAM	1	1	7.31	7.42	7.28	1
15M	DFT-S 64QAM	1	1	5.98	5.98	5.97	2.5
15M	DFT-S 256QAM	1	1	4.07	4.07	3.95	4.5
15M	CP QPSK	1	1	6.95	6.98	6.90	1.5
BW	MCS Index	Channel		647000	650000	653000	3GPP MPR
		Frequency (MHz)		3705	3750	3795	
10M	DFT-S PI/2 BPSK	1	1	8.47	8.48	8.42	0
10M	DFT-S QPSK	1	1	8.45	8.46	8.36	0
		1	11	8.41	8.41	8.38	0
		1	22	8.41	8.43	8.32	0
		12	0	7.48	7.51	7.39	1
		12	6	8.43	8.50	8.35	0
		12	12	7.46	7.49	7.36	1
		24	0	7.34	7.40	7.32	1
10M	DFT-S 16QAM	1	1	7.33	7.37	7.34	1
10M	DFT-S 64QAM	1	1	6.00	6.01	5.89	2.5
10M	DFT-S 256QAM	1	1	4.02	4.07	4.01	4.5
10M	CP QPSK	1	1	6.95	6.98	6.86	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 2

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	13.88	13.92	13.95	0
20M	DFT-S QPSK	1	1	13.92	13.96	13.99	0
		1	53	13.82	13.86	13.89	0
		1	104	13.78	13.82	13.85	0
		50	0	12.79	12.83	12.86	1
		50	28	13.85	13.89	13.92	0
		50	56	12.77	12.81	12.84	1
		100	0	12.75	12.79	12.82	1
20M	DFT-S 16QAM	1	1	12.72	12.76	12.79	1
20M	DFT-S 64QAM	1	1	11.30	11.34	11.37	2.5
20M	DFT-S 256QAM	1	1	9.35	9.39	9.42	4.5
20M	CP QPSK	1	1	12.32	12.36	12.39	1.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	13.86	13.82	13.90	0
15M	DFT-S QPSK	1	1	13.90	13.89	13.94	0
		1	40	13.78	13.82	13.82	0
		1	77	13.70	13.82	13.75	0
		36	0	12.75	12.75	12.78	1
		36	22	13.76	13.87	13.86	0
		36	43	12.74	12.81	12.81	1
		75	0	12.73	12.69	12.80	1
15M	DFT-S 16QAM	1	1	12.69	12.70	12.78	1
15M	DFT-S 64QAM	1	1	11.29	11.30	11.34	2.5
15M	DFT-S 256QAM	1	1	9.28	9.34	9.36	4.5
15M	CP QPSK	1	1	12.25	12.35	12.34	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 2

BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	13.79	13.75	13.83	0
10M	DFT-S QPSK	1	1	13.82	13.82	13.82	0
		1	26	13.73	13.75	13.67	0
		1	50	13.61	13.76	13.75	0
		25	0	12.69	12.64	12.76	1
		25	14	13.69	13.77	13.77	0
		25	27	12.73	12.71	12.79	1
		50	0	12.60	12.62	12.69	1
10M	DFT-S 16QAM	1	1	12.58	12.59	12.77	1
10M	DFT-S 64QAM	1	1	11.19	11.25	11.22	2.5
10M	DFT-S 256QAM	1	1	9.24	9.31	9.33	4.5
10M	CP QPSK	1	1	12.15	12.35	12.31	1.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	13.85	13.70	13.68	0
5M	DFT-S QPSK	1	1	13.87	13.82	13.77	0
		1	13	13.76	13.80	13.55	0
		1	23	13.63	13.69	13.75	0
		12	0	12.74	12.75	12.71	1
		12	7	13.75	13.86	13.73	0
		12	13	12.60	12.78	12.69	1
		25	0	12.68	12.60	12.77	1
5M	DFT-S 16QAM	1	1	12.60	12.65	12.64	1
5M	DFT-S 64QAM	1	1	11.20	11.16	11.30	2.5
5M	DFT-S 256QAM	1	1	9.23	9.27	9.24	4.5
5M	CP QPSK	1	1	12.15	12.24	12.32	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 7

BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	15.89	15.92	15.95	0
20M	DFT-S QPSK	1	1	15.91	15.94	15.97	0
		1	53	15.88	15.91	15.94	0
		1	104	15.85	15.88	15.91	0
		50	0	14.88	14.91	14.94	1
		50	28	15.89	15.92	15.95	0
		50	56	14.87	14.90	14.93	1
		100	0	14.85	14.88	14.91	1
20M	DFT-S 16QAM	1	1	14.83	14.86	14.89	1
20M	DFT-S 64QAM	1	1	13.36	13.39	13.42	2.5
20M	DFT-S 256QAM	1	1	11.41	11.44	11.47	4.5
20M	CP QPSK	1	1	14.33	14.36	14.39	1.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	15.84	15.82	15.92	0
15M	DFT-S QPSK	1	1	15.89	15.92	15.91	0
		1	40	15.80	15.88	15.84	0
		1	77	15.77	15.82	15.83	0
		36	0	14.84	14.81	14.88	1
		36	22	15.83	15.85	15.93	0
		36	43	14.83	14.90	14.90	1
		75	0	14.77	14.88	14.89	1
15M	DFT-S 16QAM	1	1	14.80	14.80	14.88	1
15M	DFT-S 64QAM	1	1	13.27	13.36	13.42	2.5
15M	DFT-S 256QAM	1	1	11.40	11.41	11.38	4.5
15M	CP QPSK	1	1	14.25	14.34	14.33	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 7

BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	15.81	15.75	15.81	0
10M	DFT-S QPSK	1	1	15.79	15.77	15.87	0
		1	26	15.74	15.83	15.73	0
		1	50	15.74	15.80	15.78	0
		25	0	14.84	14.81	14.74	1
		25	14	15.69	15.79	15.82	0
		25	27	14.68	14.84	14.86	1
		50	0	14.72	14.80	14.87	1
10M	DFT-S 16QAM	1	1	14.80	14.70	14.87	1
10M	DFT-S 64QAM	1	1	13.15	13.29	13.38	2.5
10M	DFT-S 256QAM	1	1	11.28	11.26	11.28	4.5
10M	CP QPSK	1	1	14.20	14.28	14.25	1.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	15.70	15.75	15.71	0
5M	DFT-S QPSK	1	1	15.83	15.92	15.83	0
		1	13	15.65	15.73	15.63	0
		1	23	15.71	15.70	15.64	0
		12	0	14.69	14.79	14.72	1
		12	7	15.79	15.74	15.70	0
		12	13	14.76	14.79	14.72	1
		25	0	14.69	14.78	14.82	1
5M	DFT-S 16QAM	1	1	14.71	14.76	14.86	1
5M	DFT-S 64QAM	1	1	13.15	13.31	13.27	2.5
5M	DFT-S 256QAM	1	1	11.37	11.28	11.37	4.5
5M	CP QPSK	1	1	14.25	14.19	14.29	1.5

NR Conducted Power_ENDC_Tablet_Ant 2							
NR Band 25							
BW	MCS Index	Channel		372000	376500	381000	3GPP MPR
		Frequency (MHz)		1860	1882.5	1905	
20M	DFT-S PI/2 BPSK	1	1	13.88	13.90	14.18	0
20M	DFT-S QPSK	1	1	13.91	13.93	14.21	0
		1	53	13.85	13.87	14.15	0
		1	104	13.83	13.85	14.13	0
		50	0	12.79	12.81	13.09	1
		50	28	13.86	13.88	14.16	0
		50	56	12.75	12.77	13.05	1
		100	0	12.72	12.74	13.02	1
20M	DFT-S 16QAM	1	1	12.69	12.71	12.99	1
20M	DFT-S 64QAM	1	1	10.79	10.81	11.09	2.5
20M	DFT-S 256QAM	1	1	8.81	8.83	9.11	4.5
20M	CP QPSK	1	1	11.75	11.77	12.05	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 25

BW	MCS Index	Channel		371500	376500	381500	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	DFT-S PI/2 BPSK	1	1	13.84	13.89	14.18	0
15M	DFT-S QPSK	1	1	13.91	13.86	14.14	0
		1	40	13.76	13.81	14.12	0
		1	77	13.83	13.77	14.06	0
		36	0	12.70	12.72	13.09	1
		36	22	13.80	13.84	14.13	0
		36	43	12.71	12.67	13.03	1
		75	0	12.72	12.69	13.01	1
15M	DFT-S 16QAM	1	1	12.66	12.66	12.93	1
15M	DFT-S 64QAM	1	1	10.72	10.73	11.04	2.5
15M	DFT-S 256QAM	1	1	8.78	8.83	9.06	4.5
15M	CP QPSK	1	1	11.72	11.69	12.05	1.5
BW	MCS Index	Channel		371000	376500	382000	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	DFT-S PI/2 BPSK	1	1	13.69	13.89	14.11	0
10M	DFT-S QPSK	1	1	13.84	13.85	14.01	0
		1	26	13.63	13.66	14.07	0
		1	50	13.80	13.62	14.00	0
		25	0	12.65	12.65	13.03	1
		25	14	13.69	13.76	14.09	0
		25	27	12.58	12.60	12.92	1
		50	0	12.59	12.69	12.99	1
10M	DFT-S 16QAM	1	1	12.65	12.54	12.80	1
10M	DFT-S 64QAM	1	1	10.69	10.58	11.02	2.5
10M	DFT-S 256QAM	1	1	8.64	8.76	8.96	4.5
10M	CP QPSK	1	1	11.72	11.59	12.02	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 25

BW	MCS Index	Channel		370500	376500	382500	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	DFT-S PI/2 BPSK	1	1	13.70	13.82	14.02	0
5M	DFT-S QPSK	1	1	13.76	13.74	13.98	0
		1	13	13.69	13.72	13.97	0
		1	23	13.72	13.63	13.91	0
		12	0	12.59	12.63	12.97	1
		12	7	13.80	13.71	14.07	0
		12	13	12.66	12.67	12.85	1
		25	0	12.69	12.55	13.00	1
5M	DFT-S 16QAM	1	1	12.54	12.61	12.83	1
5M	DFT-S 64QAM	1	1	10.67	10.68	10.97	2.5
5M	DFT-S 256QAM	1	1	8.78	8.80	9.01	4.5
5M	CP QPSK	1	1	11.63	11.56	12.03	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 30

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			462000		
		Frequency (MHz)			2310		
10M	DFT-S PI/2 BPSK	1	1		18.75		0
10M	DFT-S QPSK	1	1		18.78		0
		1	26		18.74		0
		1	50		18.71		0
		25	0		17.75		1
		25	14		18.76		0
		25	27		17.73		1
		50	0		17.69		1
10M	DFT-S 16QAM	1	1		17.65		1
10M	DFT-S 64QAM	1	1		16.22		2.5
10M	DFT-S 256QAM	1	1		14.19		4.5
10M	CP QPSK	1	1		17.24		1.5
BW	MCS Index	Channel		461500	462000	462500	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	DFT-S PI/2 BPSK	1	1	18.66	18.75	18.61	0
5M	DFT-S QPSK	1	1	18.64	18.76	18.65	0
		1	13	18.57	18.68	18.60	0
		1	23	18.55	18.67	18.61	0
		12	0	17.67	17.66	17.69	1
		12	7	18.69	18.72	18.71	0
		12	13	17.59	17.64	17.66	1
		25	0	17.59	17.68	17.62	1
5M	DFT-S 16QAM	1	1	17.58	17.56	17.52	1
5M	DFT-S 64QAM	1	1	16.05	16.22	16.11	2.5
5M	DFT-S 256QAM	1	1	14.09	14.15	14.12	4.5
5M	CP QPSK	1	1	17.08	17.17	17.19	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 66

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		346000	349000	352000	
		Frequency (MHz)		1730	1745	1760	
40M	DFT-S PI/2 BPSK	1	1	15.84	15.94	16.86	0
40M	DFT-S QPSK	1	1	15.87	15.97	16.89	0
		1	108	15.82	15.92	16.84	0
		1	214	15.80	15.90	16.82	0
		108	0	15.18	15.26	15.92	1
		108	54	15.84	15.94	16.86	0
		108	108	14.83	14.93	15.85	1
		216	0	14.82	14.92	15.84	1
40M	DFT-S 16QAM	1	1	15.67	15.77	16.69	1
40M	DFT-S 64QAM	1	1	13.34	13.44	14.36	2.5
40M	DFT-S 256QAM	1	1	11.41	11.51	12.43	4.5
40M	CP QPSK	1	1	14.39	14.49	15.41	1.5
BW	MCS Index	Channel		345000	349000	353000	3GPP MPR
		Frequency (MHz)		1725	1745	1765	
30M	DFT-S PI/2 BPSK	1	1	15.74	15.91	16.78	0
30M	DFT-S QPSK	1	1	15.82	15.87	16.86	0
		1	80	15.79	15.90	16.80	0
		1	158	15.76	15.86	16.78	0
		80	0	15.13	15.23	15.89	1
		80	40	15.84	15.92	16.79	0
		80	80	14.73	14.86	15.78	1
		160	0	14.79	14.87	15.84	1
30M	DFT-S 16QAM	1	1	15.66	15.68	16.64	1
30M	DFT-S 64QAM	1	1	13.31	13.41	14.31	2.5
30M	DFT-S 256QAM	1	1	11.31	11.51	12.40	4.5
30M	CP QPSK	1	1	14.33	14.40	15.38	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 66

BW	MCS Index	Channel		344500	349000	353500	3GPP MPR
		Frequency (MHz)		1722.5	1745	1767.5	
25M	DFT-S PI/2 BPSK	1	1	15.72	15.77	16.69	0
25M	DFT-S QPSK	1	1	15.78	15.79	16.83	0
		1	67	15.65	15.77	16.69	0
		1	131	15.76	15.79	16.77	0
		64	0	15.11	15.08	15.83	1
		64	35	15.75	15.83	16.69	0
		64	69	14.72	14.78	15.63	1
		128	0	14.74	14.72	15.69	1
25M	DFT-S 16QAM	1	1	15.59	15.53	16.49	1
25M	DFT-S 64QAM	1	1	13.16	13.33	14.28	2.5
25M	DFT-S 256QAM	1	1	11.29	11.38	12.32	4.5
25M	CP QPSK	1	1	14.27	14.38	15.33	1.5
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	15.78	15.92	16.78	0
20M	DFT-S QPSK	1	1	15.79	15.95	16.79	0
		1	53	15.74	15.82	16.83	0
		1	104	15.73	15.84	16.72	0
		50	0	15.16	15.25	15.83	1
		50	28	15.76	15.85	16.77	0
		50	56	14.82	14.83	15.84	1
		100	0	14.80	14.89	15.76	1
20M	DFT-S 16QAM	1	1	15.65	15.72	16.60	1
20M	DFT-S 64QAM	1	1	13.30	13.43	14.29	2.5
20M	DFT-S 256QAM	1	1	11.32	11.48	12.38	4.5
20M	CP QPSK	1	1	14.39	14.39	15.40	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 66

BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	15.73	15.84	16.64	0
15M	DFT-S QPSK	1	1	15.67	15.89	16.69	0
		1	40	15.71	15.79	16.73	0
		1	77	15.63	15.76	16.63	0
		36	0	15.03	15.24	15.70	1
		36	22	15.75	15.76	16.76	0
		36	43	14.82	14.69	15.69	1
		75	0	14.78	14.89	15.65	1
15M	DFT-S 16QAM	1	1	15.52	15.59	16.58	1
15M	DFT-S 64QAM	1	1	13.23	13.33	14.29	2.5
15M	DFT-S 256QAM	1	1	11.20	11.46	12.23	4.5
15M	CP QPSK	1	1	14.32	14.35	15.26	1.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	15.68	15.81	16.74	0
10M	DFT-S QPSK	1	1	15.77	15.74	16.79	0
		1	26	15.67	15.79	16.66	0
		1	50	15.76	15.81	16.64	0
		25	0	15.11	15.19	15.82	1
		25	14	15.69	15.82	16.83	0
		25	27	14.77	14.90	15.69	1
		50	0	14.61	14.84	15.68	1
10M	DFT-S 16QAM	1	1	15.52	15.66	16.62	1
10M	DFT-S 64QAM	1	1	13.21	13.25	14.18	2.5
10M	DFT-S 256QAM	1	1	11.27	11.51	12.34	4.5
10M	CP QPSK	1	1	14.19	14.41	15.28	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 66

BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	15.79	15.87	16.79	0
5M	DFT-S QPSK	1	1	15.80	15.87	16.79	0
		1	13	15.73	15.82	16.80	0
		1	23	15.77	15.85	16.76	0
		12	0	15.17	15.19	15.86	1
		12	7	15.79	15.85	16.83	0
		12	13	14.83	14.93	15.75	1
		25	0	14.76	14.87	15.75	1
5M	DFT-S 16QAM	1	1	15.58	15.72	16.68	1
5M	DFT-S 64QAM	1	1	13.30	13.36	14.31	2.5
5M	DFT-S 256QAM	1	1	11.32	11.51	12.34	4.5
5M	CP QPSK	1	1	14.33	14.49	15.33	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 38

BW	MCS Index	Channel		516000	519000	522000	3GPP MPR
		Frequency (MHz)		2580	2595	2610	
20M	DFT-S PI/2 BPSK	1	1	14.45	14.20	14.18	0
20M	DFT-S QPSK	1	1	14.49	14.24	14.22	0
		1	26	14.42	14.17	14.15	0
		1	49	14.39	14.14	14.12	0
		25	0	13.42	13.17	13.15	1
		25	13	14.44	14.19	14.17	0
		25	26	13.41	13.16	13.14	1
		50	0	13.38	13.13	13.11	1
20M	DFT-S 16QAM	1	1	13.35	13.10	13.08	1
20M	DFT-S 64QAM	1	1	11.92	11.67	11.65	2.5
20M	DFT-S 256QAM	1	1	9.89	9.64	9.62	4.5
20M	CP QPSK	1	1	12.94	12.69	12.67	1.5
BW	MCS Index	Channel		515500	519000	522500	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	DFT-S PI/2 BPSK	1	1	14.42	14.13	14.13	0
15M	DFT-S QPSK	1	1	14.40	14.18	14.20	0
		1	19	14.35	14.14	14.15	0
		1	36	14.36	14.12	14.05	0
		18	0	13.34	13.15	13.08	1
		18	10	14.35	14.09	14.09	0
		18	20	13.40	13.10	13.12	1
		36	0	13.28	13.09	13.08	1
15M	DFT-S 16QAM	1	1	13.34	13.08	13.05	1
15M	DFT-S 64QAM	1	1	11.92	11.57	11.61	2.5
15M	DFT-S 256QAM	1	1	9.81	9.60	9.59	4.5
15M	CP QPSK	1	1	12.91	12.65	12.59	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 38

BW	MCS Index	Channel		515000	519000	523000	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	DFT-S PI/2 BPSK	1	1	14.30	14.08	14.12	0
10M	DFT-S QPSK	1	1	14.39	14.16	14.19	0
		1	11	14.28	14.02	14.12	0
		1	22	14.25	14.01	13.94	0
		12	0	13.27	13.05	13.05	1
		12	6	14.25	13.96	14.05	0
		12	12	13.31	13.05	13.01	1
		24	0	13.28	12.96	13.04	1
10M	DFT-S 16QAM	1	1	13.30	12.96	13.03	1
10M	DFT-S 64QAM	1	1	11.84	11.57	11.60	2.5
10M	DFT-S 256QAM	1	1	9.73	9.50	9.55	4.5
10M	CP QPSK	1	1	12.79	12.64	12.53	1.5

NR Conducted Power_ENDC_Tablet_Ant 2									
NR Band 41									
BW	Index	Frequency (MHz)		2536.02	2546.52	2592.99	2621.49	2649.99	MPR
80M	DFT-S PI/2 BPSK	1	1	20.85	20.94	20.86	20.91	20.88	0
80M	DFT-S QPSK	1	1	20.88	20.97	20.89	20.94	20.91	0
		1	109	20.84	20.93	20.85	20.90	20.87	0
		1	215	20.83	20.92	20.84	20.89	20.86	0
		108	0	19.86	19.95	19.87	19.92	19.89	1
		108	55	20.80	20.89	20.81	20.86	20.83	0
		108	109	19.85	19.94	19.86	19.91	19.88	1
		216	0	19.83	19.92	19.84	19.89	19.86	1
80M	DFT-S 16QAM	1	1	19.82	19.91	19.83	19.88	19.85	1
80M	DFT-S 64QAM	1	1	18.34	18.43	18.35	18.40	18.37	2.5
80M	DFT-S 256QAM	1	1	16.36	16.45	16.37	16.42	16.39	4.5
80M	CP QPSK	1	1	19.32	19.41	19.33	19.38	19.35	1.5
BW	MCS Index	Channel		506202	512400	518598	524802	531000	3GPP MPR
		Frequency (MHz)		2531.01	2562	2592.99	2624.01	2655	
70M	DFT-S PI/2 BPSK	1	1	20.75	20.91	20.81	20.88	20.85	0
70M	DFT-S QPSK	1	1	20.87	20.95	20.85	20.92	20.94	0
		1	95	20.84	20.93	20.79	20.88	20.89	0
		1	187	20.82	20.85	20.75	20.80	20.81	0
		90	0	19.86	19.89	19.77	19.90	19.90	1
		90	50	20.76	20.85	20.74	20.85	20.78	0
		90	99	19.84	19.84	19.78	19.85	19.85	1
		180	0	19.82	19.86	19.84	19.81	19.80	1
70M	DFT-S 16QAM	1	1	19.75	19.81	19.83	19.85	19.87	1
70M	DFT-S 64QAM	1	1	18.25	18.39	18.29	18.35	18.30	2.5
70M	DFT-S 256QAM	1	1	16.29	16.35	16.33	16.33	16.34	4.5
70M	CP QPSK	1	1	19.27	19.39	19.33	19.30	19.32	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 41

BW	MCS Index	Channel		505200	511896	518598	525294	531996	3GPP MPR
		Frequency (MHz)		2526	2559.48	2592.99	2626.48	2659.98	
60M	DFT-S PI/2 BPSK	1	1	20.62	20.88	20.72	20.80	20.79	0
60M	DFT-S QPSK	1	1	20.84	20.92	20.77	20.92	20.90	0
		1	81	20.74	20.85	20.75	20.88	20.83	0
		1	160	20.79	20.74	20.73	20.72	20.79	0
		81	0	19.80	19.83	19.63	19.90	19.88	1
		81	41	20.74	20.72	20.67	20.77	20.72	0
		81	81	19.76	19.81	19.76	19.85	19.83	1
		162	0	19.76	19.81	19.81	19.79	19.71	1
60M	DFT-S 16QAM	1	1	19.71	19.69	19.69	19.83	19.84	1
60M	DFT-S 64QAM	1	1	18.24	18.36	18.29	18.30	18.29	2.5
60M	DFT-S 256QAM	1	1	16.22	16.30	16.32	16.27	16.28	4.5
60M	CP QPSK	1	1	19.19	19.39	19.32	19.29	19.26	1.5
BW	MCS Index	Channel		504204	511404	518598	525798	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.02	2592.99	2628.99	2664.99	
50M	DFT-S PI/2 BPSK	1	1	20.70	20.83	20.66	20.70	20.69	0
50M	DFT-S QPSK	1	1	20.82	20.82	20.70	20.85	20.81	0
		1	67	20.74	20.90	20.74	20.86	20.80	0
		1	131	20.78	20.81	20.67	20.71	20.71	0
		64	0	19.79	19.79	19.57	19.83	19.86	1
		64	35	20.62	20.83	20.67	20.69	20.65	0
		64	69	19.78	19.84	19.70	19.75	19.78	1
		128	0	19.67	19.86	19.83	19.77	19.65	1
50M	DFT-S 16QAM	1	1	19.61	19.70	19.77	19.82	19.75	1
50M	DFT-S 64QAM	1	1	18.25	18.25	18.16	18.22	18.27	2.5
50M	DFT-S 256QAM	1	1	16.21	16.27	16.27	16.25	16.27	4.5
50M	CP QPSK	1	1	19.13	19.26	19.25	19.25	19.16	1.5

NR Conducted Power_ENDC_Tablet_Ant 2									
NR Band 41									
BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	20.67	20.76	20.68	20.70	20.64	0
40M	DFT-S QPSK	1	1	20.76	20.83	20.74	20.84	20.80	0
		1	53	20.82	20.82	20.70	20.83	20.72	0
		1	104	20.78	20.76	20.73	20.64	20.63	0
		50	0	19.84	19.89	19.70	19.74	19.79	1
		50	28	20.66	20.83	20.62	20.68	20.65	0
		50	56	19.71	19.80	19.70	19.74	19.68	1
		100	0	19.67	19.78	19.84	19.72	19.63	1
40M	DFT-S 16QAM	1	1	19.70	19.71	19.75	19.82	19.73	1
40M	DFT-S 64QAM	1	1	18.17	18.39	18.22	18.17	18.25	2.5
40M	DFT-S 256QAM	1	1	16.27	16.24	16.27	16.23	16.27	4.5
40M	CP QPSK	1	1	19.24	19.37	19.23	19.15	19.15	1.5
BW	MCS Index	Channel		502200	510396	518598	526794	534996	3GPP MPR
		Frequency (MHz)		2511	2551.98	2592.99	2633.97	2674.98	
30M	DFT-S PI/2 BPSK	1	1	20.75	20.86	20.75	20.60	20.64	0
30M	DFT-S QPSK	1	1	20.84	20.83	20.72	20.77	20.72	0
		1	39	20.71	20.88	20.70	20.78	20.64	0
		1	76	20.74	20.75	20.67	20.61	20.60	0
		36	0	19.75	19.89	19.62	19.66	19.73	1
		36	21	20.72	20.84	20.73	20.67	20.65	0
		36	42	19.80	19.69	19.65	19.68	19.66	1
		75	0	19.76	19.82	19.71	19.65	19.60	1
30M	DFT-S 16QAM	1	1	19.60	19.70	19.73	19.73	19.64	1
30M	DFT-S 64QAM	1	1	18.16	18.24	18.28	18.07	18.25	2.5
30M	DFT-S 256QAM	1	1	16.16	16.27	16.25	16.21	16.20	4.5
30M	CP QPSK	1	1	19.15	19.28	19.23	19.15	19.15	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 41

BW	MCS Index	Channel		501204	509898	518598	527298	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.49	2592.99	2636.49	2679.99	
20M	DFT-S PI/2 BPSK	1	1	20.64	20.80	20.69	20.57	20.69	0
20M	DFT-S QPSK	1	1	20.76	20.75	20.81	20.73	20.67	0
		1	26	20.63	20.81	20.75	20.47	20.55	0
		1	49	20.64	20.77	20.71	20.58	20.64	0
		25	0	19.70	19.91	19.84	19.61	19.63	1
		25	13	20.72	20.72	20.67	20.52	20.60	0
		25	26	19.65	19.81	19.65	19.64	19.69	1
		50	0	19.64	19.75	19.61	19.58	19.73	1
20M	DFT-S 16QAM	1	1	19.70	19.91	19.70	19.55	19.57	1
20M	DFT-S 64QAM	1	1	18.22	18.33	18.27	18.12	18.12	2.5
20M	DFT-S 256QAM	1	1	16.15	16.37	16.36	16.24	16.28	4.5
20M	CP QPSK	1	1	19.25	19.30	19.23	19.17	19.12	1.5
BW	MCS Index	Channel		500700	509646	518598	527544	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.23	2592.99	2637.72	2682.48	
15M	DFT-S PI/2 BPSK	1	1	20.78	20.88	20.72	20.64	20.69	0
15M	DFT-S QPSK	1	1	20.72	20.89	20.74	20.78	20.69	0
		1	19	20.72	20.76	20.74	20.57	20.65	0
		1	36	20.68	20.79	20.63	20.64	20.64	0
		18	0	19.75	19.91	19.81	19.68	19.72	1
		18	10	20.73	20.72	20.66	20.59	20.67	0
		18	20	19.71	19.81	19.62	19.71	19.76	1
		36	0	19.65	19.80	19.62	19.64	19.73	1
15M	DFT-S 16QAM	1	1	19.72	19.85	19.64	19.63	19.66	1
15M	DFT-S 64QAM	1	1	18.24	18.28	18.23	18.22	18.18	2.5
15M	DFT-S 256QAM	1	1	16.29	16.36	16.30	16.25	16.28	4.5
15M	CP QPSK	1	1	19.22	19.26	19.23	19.25	19.15	1.5

NR Conducted Power_ENDC_Tablet_Ant 2									
NR Band 41									
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	20.74	20.79	20.55	20.70	20.74	0
10M	DFT-S QPSK	1	1	20.71	20.83	20.71	20.87	20.75	0
		1	11	20.67	20.75	20.72	20.67	20.69	0
		1	22	20.73	20.75	20.53	20.70	20.72	0
		12	0	19.76	19.87	19.77	19.69	19.78	1
		12	6	20.69	20.76	20.57	20.67	20.70	0
		12	12	19.62	19.91	19.60	19.76	19.83	1
		24	0	19.61	19.77	19.74	19.74	19.80	1
10M	DFT-S 16QAM	1	1	19.69	19.78	19.69	19.70	19.67	1
10M	DFT-S 64QAM	1	1	18.28	18.30	18.17	18.32	18.18	2.5
10M	DFT-S 256QAM	1	1	16.25	16.40	16.31	16.27	16.33	4.5
10M	CP QPSK	1	1	19.21	19.35	19.14	19.25	19.21	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		640000	641110	642222	643332	
		Frequency (MHz)		3600	3616.65	3633.33	3649.98	
100M	DFT-S PI/2 BPSK	1	1	12.90	12.93	12.71	12.81	0
100M	DFT-S QPSK	1	1	12.94	12.97	12.75	12.85	0
		1	137	12.85	12.88	12.66	12.76	0
		1	271	12.81	12.84	12.62	12.72	0
		135	0	11.92	11.95	11.73	11.83	1
		135	69	12.89	12.92	12.70	12.80	0
		135	138	11.90	11.93	11.71	11.81	1
		270	0	11.88	11.91	11.69	11.79	1
100M	DFT-S 16QAM	1	1	11.84	11.87	11.65	11.75	1
100M	DFT-S 64QAM	1	1	10.83	10.86	10.64	10.74	2.5
100M	DFT-S 256QAM	1	1	8.86	8.89	8.67	8.77	4.5
100M	CP QPSK	1	1	11.90	11.93	11.71	11.81	1.5
BW	MCS Index	Channel		639668	641000	642332	643666	3GPP MPR
		Frequency (MHz)		3595.02	3615	3634.98	3654.99	
90M	DFT-S PI/2 BPSK	1	1	12.84	12.87	12.71	12.77	0
90M	DFT-S QPSK	1	1	12.86	12.96	12.65	12.84	0
		1	123	12.81	12.84	12.62	12.68	0
		1	243	12.75	12.82	12.62	12.68	0
		120	0	11.83	11.88	11.71	11.81	1
		120	63	12.85	12.91	12.69	12.71	0
		120	125	11.84	11.90	11.69	11.78	1
		243	0	11.78	11.82	11.62	11.70	1
90M	DFT-S 16QAM	1	1	11.80	11.83	11.61	11.74	1
90M	DFT-S 64QAM	1	1	10.80	10.82	10.61	10.68	2.5
90M	DFT-S 256QAM	1	1	8.81	8.81	8.59	8.72	4.5
90M	CP QPSK	1	1	11.85	11.83	11.70	11.79	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 48

BW	MCS Index	Channel		639334	640888	642444	644000	3GPP MPR
		Frequency (MHz)		3590.01	3613.32	3636.66	3660	
80M	DFT-S PI/2 BPSK	1	1	12.76	12.74	12.57	12.70	0
80M	DFT-S QPSK	1	1	12.79	12.83	12.62	12.76	0
		1	109	12.76	12.77	12.59	12.63	0
		1	215	12.68	12.70	12.52	12.66	0
		108	0	11.82	11.81	11.64	11.81	1
		108	55	12.71	12.87	12.61	12.62	0
		108	109	11.81	11.82	11.61	11.76	1
		216	0	11.69	11.76	11.62	11.65	1
80M	DFT-S 16QAM	1	1	11.72	11.68	11.54	11.68	1
80M	DFT-S 64QAM	1	1	10.75	10.67	10.53	10.66	2.5
80M	DFT-S 256QAM	1	1	8.80	8.74	8.56	8.63	4.5
80M	CP QPSK	1	1	11.70	11.76	11.56	11.72	1.5
BW	MCS Index	Channel		639000	640778	642548	644332	3GPP MPR
		Frequency (MHz)		3585	3611.67	3638.22	3664.98	
70M	DFT-S PI/2 BPSK	1	1	12.72	12.78	12.46	12.67	0
70M	DFT-S QPSK	1	1	12.76	12.89	12.60	12.76	0
		1	95	12.77	12.72	12.59	12.60	0
		1	187	12.60	12.77	12.50	12.59	0
		90	0	11.83	11.86	11.59	11.74	1
		90	50	12.71	12.87	12.54	12.52	0
		90	99	11.76	11.79	11.47	11.70	1
		180	0	11.77	11.71	11.49	11.58	1
70M	DFT-S 16QAM	1	1	11.72	11.69	11.49	11.66	1
70M	DFT-S 64QAM	1	1	10.75	10.71	10.47	10.60	2.5
70M	DFT-S 256QAM	1	1	8.80	8.77	8.58	8.56	4.5
70M	CP QPSK	1	1	11.73	11.76	11.56	11.72	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 48

BW	MCS Index	Channel		638668	640666	642666	644666	3GPP MPR
		Frequency (MHz)		3580.02	3609.99	3639.99	3669.99	
60M	DFT-S PI/2 BPSK	1	1	12.70	12.74	12.63	12.65	0
60M	DFT-S QPSK	1	1	12.82	12.89	12.59	12.76	0
		1	81	12.79	12.70	12.51	12.54	0
		1	160	12.75	12.72	12.53	12.50	0
		81	0	11.71	11.74	11.56	11.72	1
		81	41	12.85	12.76	12.54	12.42	0
		81	81	11.73	11.79	11.57	11.68	1
		162	0	11.66	11.77	11.56	11.55	1
60M	DFT-S 16QAM	1	1	11.72	11.83	11.51	11.65	1
60M	DFT-S 64QAM	1	1	10.69	10.73	10.59	10.52	2.5
60M	DFT-S 256QAM	1	1	8.75	8.78	8.47	8.46	4.5
60M	CP QPSK	1	1	11.74	11.81	11.68	11.67	1.5
BW	MCS Index	Channel		638334	640556	642778	645000	3GPP MPR
		Frequency (MHz)		3575.01	3608.34	3641.67	3675	
50M	DFT-S PI/2 BPSK	1	1	12.70	12.87	12.66	12.56	0
50M	DFT-S QPSK	1	1	12.76	12.86	12.54	12.75	0
		1	67	12.80	12.72	12.61	12.49	0
		1	131	12.66	12.71	12.55	12.45	0
		64	0	11.77	11.86	11.60	11.66	1
		64	35	12.78	12.83	12.59	12.41	0
		64	69	11.80	11.86	11.68	11.61	1
		128	0	11.77	11.68	11.55	11.53	1
50M	DFT-S 16QAM	1	1	11.79	11.75	11.54	11.61	1
50M	DFT-S 64QAM	1	1	10.68	10.71	10.56	10.46	2.5
50M	DFT-S 256QAM	1	1	8.76	8.73	8.45	8.45	4.5
50M	CP QPSK	1	1	11.74	11.82	11.61	11.67	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 48

BW	MCS Index	Channel		638000	640444	642888	645332	3GPP MPR
		Frequency (MHz)		3570	3606.66	3643.32	3679.98	
40M	DFT-S PI/2 BPSK	1	1	12.85	12.84	12.66	12.76	0
40M	DFT-S QPSK	1	1	12.86	12.90	12.75	12.79	0
		1	53	12.79	12.83	12.64	12.68	0
		1	104	12.78	12.74	12.54	12.71	0
		50	0	11.89	11.91	11.69	11.76	1
		50	28	12.84	12.90	12.63	12.71	0
		50	56	11.88	11.89	11.65	11.81	1
		100	0	11.79	11.86	11.66	11.73	1
40M	DFT-S 16QAM	1	1	11.83	11.87	11.61	11.65	1
40M	DFT-S 64QAM	1	1	10.80	10.76	10.56	10.70	2.5
40M	DFT-S 256QAM	1	1	8.79	8.80	8.65	8.77	4.5
40M	CP QPSK	1	1	11.85	11.92	11.61	11.72	1.5
BW	MCS Index	Channel		637334	640222	643110	646000	3GPP MPR
		Frequency (MHz)		3560.01	3603.33	3646.65	3690	
20M	DFT-S PI/2 BPSK	1	1	12.82	12.75	12.62	12.66	0
20M	DFT-S QPSK	1	1	12.84	12.89	12.72	12.77	0
		1	26	12.64	12.74	12.59	12.66	0
		1	49	12.67	12.69	12.53	12.62	0
		25	0	11.89	11.81	11.67	11.66	1
		25	13	12.75	12.80	12.63	12.70	0
		25	26	11.81	11.80	11.53	11.74	1
		50	0	11.69	11.79	11.58	11.65	1
20M	DFT-S 16QAM	1	1	11.79	11.82	11.56	11.64	1
20M	DFT-S 64QAM	1	1	10.75	10.71	10.55	10.70	2.5
20M	DFT-S 256QAM	1	1	8.79	8.67	8.61	8.71	4.5
20M	CP QPSK	1	1	11.82	11.91	11.59	11.71	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 48

BW	MCS Index	Channel		637168	640168	643166	646166	3GPP MPR
		Frequency (MHz)		3557.52	3602.52	3647.49	3692.49	
15M	DFT-S PI/2 BPSK	1	1	12.76	12.73	12.62	12.56	0
15M	DFT-S QPSK	1	1	12.82	12.88	12.65	12.67	0
		1	19	12.70	12.83	12.59	12.59	0
		1	36	12.64	12.69	12.41	12.58	0
		18	0	11.87	11.79	11.63	11.63	1
		18	10	12.76	12.83	12.59	12.60	0
		18	20	11.88	11.78	11.42	11.64	1
		36	0	11.65	11.71	11.52	11.65	1
15M	DFT-S 16QAM	1	1	11.72	11.82	11.61	11.57	1
15M	DFT-S 64QAM	1	1	10.77	10.70	10.42	10.60	2.5
15M	DFT-S 256QAM	1	1	8.75	8.73	8.52	8.67	4.5
15M	CP QPSK	1	1	11.77	11.89	11.60	11.63	1.5
BW	MCS Index	Channel		637000	640110	643222	646332	3GPP MPR
		Frequency (MHz)		3555	3601.65	3648.33	3694.98	
10M	DFT-S PI/2 BPSK	1	1	12.80	12.70	12.65	12.52	0
10M	DFT-S QPSK	1	1	12.77	12.75	12.61	12.62	0
		1	11	12.68	12.77	12.64	12.51	0
		1	22	12.65	12.62	12.51	12.54	0
		12	0	11.85	11.84	11.56	11.54	1
		12	6	12.73	12.86	12.61	12.52	0
		12	12	11.80	11.89	11.56	11.55	1
		24	0	11.79	11.83	11.56	11.63	1
10M	DFT-S 16QAM	1	1	11.78	11.81	11.46	11.47	1
10M	DFT-S 64QAM	1	1	10.73	10.65	10.42	10.55	2.5
10M	DFT-S 256QAM	1	1	8.70	8.71	8.58	8.64	4.5
10M	CP QPSK	1	1	11.73	11.82	11.53	11.62	1.5

NR Conducted Power_ENDC_Tablet_Ant 2									
NR Band 77									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		650000	653000	656000	659000	662000	
		Frequency (MHz)		3750	3795	3840	3885	3930	
100M	DFT-S PI/2 BPSK	1	1	15.43	15.66	15.69	15.71	15.84	0
100M	DFT-S QPSK	1	1	15.45	15.68	15.71	15.73	15.86	0
		1	137	15.40	15.63	15.66	15.68	15.81	0
		1	271	15.38	15.61	15.64	15.66	15.79	0
		135	0	14.41	14.64	14.67	14.69	14.82	1
		135	69	15.44	15.67	15.70	15.72	15.85	0
		135	138	14.37	14.60	14.63	14.65	14.78	1
		270	0	14.34	14.57	14.60	14.62	14.75	1
100M	DFT-S 16QAM	1	1	14.33	14.56	14.59	14.61	14.74	1
100M	DFT-S 64QAM	1	1	12.93	13.16	13.19	13.21	13.34	2.5
100M	DFT-S 256QAM	1	1	10.97	11.20	11.23	11.25	11.38	4.5
100M	CP QPSK	1	1	13.91	14.14	14.17	14.19	14.32	1.5
BW	MCS Index	Channel		649668	652834	656000	659166	662332	3GPP MPR
		Frequency (MHz)		3745.02	3792.51	3840	3887.49	3934.98	
90M	DFT-S PI/2 BPSK	1	1	15.34	15.56	15.65	15.64	15.74	0
90M	DFT-S QPSK	1	1	15.37	15.60	15.65	15.64	15.80	0
		1	123	15.34	15.63	15.63	15.63	15.78	0
		1	243	15.32	15.53	15.61	15.62	15.76	0
		120	0	14.35	14.54	14.63	14.65	14.74	1
		120	63	15.37	15.61	15.65	15.65	15.78	0
		120	125	14.29	14.55	14.62	14.55	14.77	1
		243	0	14.30	14.50	14.59	14.62	14.69	1
90M	DFT-S 16QAM	1	1	14.31	14.53	14.49	14.55	14.67	1
90M	DFT-S 64QAM	1	1	12.89	13.10	13.10	13.12	13.31	2.5
90M	DFT-S 256QAM	1	1	10.92	11.17	11.13	11.15	11.31	4.5
90M	CP QPSK	1	1	13.87	14.11	14.10	14.10	14.32	1.5

NR Conducted Power_ENDC_Tablet_Ant 2									
NR Band 77									
BW	MCS Index	Channel		649334	652666	656000	659334	662666	3GPP MPR
		Frequency (MHz)		3740.01	3789.99	3840	3890.01	3939.99	
80M	DFT-S PI/2 BPSK	1	1	15.21	15.53	15.57	15.54	15.73	0
80M	DFT-S QPSK	1	1	15.31	15.51	15.52	15.61	15.79	0
		1	109	15.28	15.60	15.48	15.57	15.70	0
		1	215	15.29	15.43	15.50	15.62	15.73	0
		108	0	14.20	14.43	14.48	14.59	14.71	1
		108	55	15.27	15.55	15.58	15.61	15.70	0
		108	109	14.18	14.45	14.54	14.47	14.70	1
		216	0	14.20	14.37	14.48	14.59	14.60	1
80M	DFT-S 16QAM	1	1	14.31	14.51	14.43	14.48	14.62	1
80M	DFT-S 64QAM	1	1	12.78	13.02	13.05	13.06	13.27	2.5
80M	DFT-S 256QAM	1	1	10.92	11.02	11.04	11.13	11.30	4.5
80M	CP QPSK	1	1	13.83	14.01	13.97	14.02	14.25	1.5
BW	MCS Index	Channel		649000	652500	656000	659500	663000	3GPP MPR
		Frequency (MHz)		3735	3787.5	3840	3892.5	3945	
70M	DFT-S PI/2 BPSK	1	1	15.29	15.48	15.49	15.51	15.71	0
70M	DFT-S QPSK	1	1	15.35	15.59	15.50	15.58	15.73	0
		1	95	15.33	15.63	15.43	15.48	15.65	0
		1	187	15.32	15.43	15.44	15.52	15.67	0
		90	0	14.28	14.41	14.40	14.51	14.70	1
		90	50	15.22	15.57	15.46	15.61	15.66	0
		90	99	14.23	14.47	14.47	14.44	14.61	1
		180	0	14.25	14.42	14.59	14.53	14.58	1
70M	DFT-S 16QAM	1	1	14.16	14.48	14.47	14.45	14.56	1
70M	DFT-S 64QAM	1	1	12.89	13.10	13.02	13.02	13.21	2.5
70M	DFT-S 256QAM	1	1	10.83	11.17	11.05	11.07	11.25	4.5
70M	CP QPSK	1	1	13.83	13.99	13.97	13.94	14.18	1.5

NR Conducted Power_ENDC_Tablet_Ant 2									
NR Band 77									
BW	MCS Index	Channel		648668	652334	656000	659666	663332	3GPP MPR
		Frequency (MHz)		3730.02	3785.01	3840	3894.99	3949.98	
60M	DFT-S PI/2 BPSK	1	1	15.19	15.55	15.50	15.49	15.67	0
60M	DFT-S QPSK	1	1	15.22	15.55	15.53	15.50	15.70	0
		1	81	15.32	15.52	15.61	15.39	15.60	0
		1	160	15.31	15.41	15.46	15.42	15.58	0
		81	0	14.32	14.45	14.59	14.47	14.60	1
		81	41	15.24	15.57	15.62	15.57	15.64	0
		81	81	14.14	14.53	14.55	14.44	14.53	1
		162	0	14.15	14.39	14.50	14.47	14.49	1
60M	DFT-S 16QAM	1	1	14.24	14.46	14.40	14.40	14.53	1
60M	DFT-S 64QAM	1	1	12.84	13.03	12.96	12.98	13.11	2.5
60M	DFT-S 256QAM	1	1	10.89	11.09	11.10	11.03	11.21	4.5
60M	CP QPSK	1	1	13.76	13.97	13.97	13.84	14.10	1.5
BW	MCS Index	Channel		648334	652166	656000	659834	663666	3GPP MPR
		Frequency (MHz)		3725.01	3782.49	3840	3897.51	3954.99	
50M	DFT-S PI/2 BPSK	1	1	15.22	15.54	15.59	15.42	15.57	0
50M	DFT-S QPSK	1	1	15.31	15.46	15.61	15.47	15.69	0
		1	67	15.30	15.50	15.49	15.32	15.57	0
		1	131	15.17	15.51	15.53	15.41	15.55	0
		64	0	14.22	14.42	14.62	14.38	14.55	1
		64	35	15.25	15.56	15.65	15.49	15.64	0
		64	69	14.25	14.47	14.50	14.41	14.46	1
		128	0	14.15	14.46	14.46	14.47	14.42	1
50M	DFT-S 16QAM	1	1	14.28	14.45	14.46	14.30	14.47	1
50M	DFT-S 64QAM	1	1	12.88	13.07	13.07	12.98	13.09	2.5
50M	DFT-S 256QAM	1	1	10.92	11.03	11.07	10.94	11.18	4.5
50M	CP QPSK	1	1	13.76	14.05	14.01	13.76	14.07	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 77

BW	MCS Index	Channel		648000	652000	656000	660000	664000	3GPP MPR
		Frequency (MHz)		3720	3780	3840	3900	3960	
40M	DFT-S PI/2 BPSK	1	1	15.31	15.61	15.61	15.45	15.58	0
40M	DFT-S QPSK	1	1	15.24	15.52	15.59	15.50	15.51	0
		1	53	15.24	15.42	15.57	15.27	15.54	0
		1	104	15.31	15.47	15.54	15.41	15.42	0
		50	0	14.23	14.55	14.58	14.44	14.54	1
		50	28	15.41	15.57	15.53	15.43	15.66	0
		50	56	14.19	14.56	14.46	14.51	14.48	1
		100	0	14.33	14.49	14.58	14.43	14.47	1
40M	DFT-S 16QAM	1	1	14.17	14.45	14.49	14.41	14.42	1
40M	DFT-S 64QAM	1	1	12.88	13.00	13.00	12.81	13.05	2.5
40M	DFT-S 256QAM	1	1	10.95	11.06	11.01	10.97	11.28	4.5
40M	CP QPSK	1	1	13.74	14.00	13.95	13.95	13.95	1.5
BW	MCS Index	Channel		647668	651834	656000	660166	664332	3GPP MPR
		Frequency (MHz)		3715.02	3777.51	3840	3902.49	3964.98	
30M	DFT-S PI/2 BPSK	1	1	15.34	15.53	15.64	15.55	15.67	0
30M	DFT-S QPSK	1	1	15.30	15.54	15.53	15.53	15.56	0
		1	39	15.29	15.49	15.49	15.35	15.58	0
		1	76	15.22	15.45	15.58	15.46	15.52	0
		36	0	14.27	14.58	14.55	14.45	14.55	1
		36	21	15.42	15.54	15.65	15.52	15.68	0
		36	42	14.17	14.54	14.43	14.58	14.55	1
		75	0	14.30	14.41	14.50	14.44	14.56	1
30M	DFT-S 16QAM	1	1	14.30	14.44	14.44	14.47	14.47	1
30M	DFT-S 64QAM	1	1	12.84	13.04	13.13	12.90	13.09	2.5
30M	DFT-S 256QAM	1	1	10.96	11.01	11.06	11.07	11.33	4.5
30M	CP QPSK	1	1	13.85	14.05	14.06	14.00	14.03	1.5

NR Conducted Power_ENDC_Tablet_Ant 2									
NR Band 77									
BW	MCS Index	Channel		647500	651750	656000	660250	664500	3GPP MPR
		Frequency (MHz)		3712.5	3776.25	3840	3903.75	3967.5	
25M	DFT-S PI/2 BPSK	1	1	15.30	15.64	15.40	15.59	15.71	0
25M	DFT-S QPSK	1	1	15.36	15.56	15.45	15.63	15.62	0
		1	33	15.29	15.47	15.45	15.43	15.61	0
		1	63	15.29	15.38	15.52	15.49	15.58	0
		32	0	14.23	14.57	14.49	14.51	14.63	1
		32	17	15.32	15.67	15.58	15.54	15.74	0
		32	33	14.17	14.56	14.49	14.60	14.60	1
		64	0	14.20	14.47	14.56	14.50	14.57	1
25M	DFT-S 16QAM	1	1	14.18	14.38	14.47	14.49	14.55	1
25M	DFT-S 64QAM	1	1	12.74	13.11	13.06	13.00	13.18	2.5
25M	DFT-S 256QAM	1	1	10.84	11.06	11.04	11.07	11.37	4.5
25M	CP QPSK	1	1	13.83	14.06	14.07	14.08	14.06	1.5
BW	MCS Index	Channel		647334	651666	656000	660266	664666	3GPP MPR
		Frequency (MHz)		3710.01	3774.99	3840	3903.99	3969.99	
20M	DFT-S PI/2 BPSK	1	1	15.29	15.66	15.55	15.65	15.76	0
20M	DFT-S QPSK	1	1	15.32	15.55	15.57	15.68	15.68	0
		1	26	15.27	15.46	15.53	15.51	15.63	0
		1	49	15.24	15.43	15.52	15.53	15.68	0
		25	0	14.28	14.58	14.55	14.59	14.66	1
		25	13	15.29	15.57	15.65	15.55	15.82	0
		25	26	14.13	14.59	14.49	14.63	14.64	1
		50	0	14.30	14.48	14.55	14.57	14.61	1
20M	DFT-S 16QAM	1	1	14.21	14.53	14.44	14.58	14.62	1
20M	DFT-S 64QAM	1	1	12.79	13.10	13.11	13.10	13.23	2.5
20M	DFT-S 256QAM	1	1	10.91	10.99	11.11	11.12	11.38	4.5
20M	CP QPSK	1	1	13.74	13.94	14.06	14.15	14.14	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 77

BW	MCS Index	Channel		647168	651584	656000	660416	664832	3GPP MPR
		Frequency (MHz)		3707.52	3773.76	3840	3906.24	3972.48	
15M	DFT-S PI/2 BPSK	1	1	15.40	15.66	15.65	15.68	15.80	0
15M	DFT-S QPSK	1	1	15.36	15.60	15.67	15.68	15.77	0
		1	19	15.36	15.57	15.61	15.59	15.71	0
		1	36	15.36	15.53	15.60	15.62	15.74	0
		18	0	14.34	14.62	14.58	14.66	14.74	1
		18	10	15.42	15.67	15.68	15.63	15.84	0
		18	20	14.28	14.60	14.53	14.64	14.74	1
		36	0	14.33	14.51	14.58	14.61	14.66	1
15M	DFT-S 16QAM	1	1	14.32	14.53	14.52	14.58	14.65	1
15M	DFT-S 64QAM	1	1	12.88	13.14	13.15	13.17	13.30	2.5
15M	DFT-S 256QAM	1	1	10.96	11.12	11.14	11.17	11.38	4.5
15M	CP QPSK	1	1	13.86	14.09	14.08	14.16	14.23	1.5
BW	MCS Index	Channel		647000	651500	656000	660500	665000	3GPP MPR
		Frequency (MHz)		3705	3772.5	3840	3907.5	3975	
10M	DFT-S PI/2 BPSK	1	1	15.33	15.65	15.60	15.69	15.81	0
10M	DFT-S QPSK	1	1	15.39	15.58	15.65	15.70	15.85	0
		1	11	15.31	15.58	15.66	15.60	15.71	0
		1	22	15.29	15.51	15.56	15.58	15.75	0
		12	0	14.33	14.62	14.57	14.62	14.81	1
		12	6	15.38	15.61	15.68	15.64	15.77	0
		12	12	14.31	14.51	14.53	14.62	14.75	1
		24	0	14.33	14.54	14.53	14.52	14.68	1
10M	DFT-S 16QAM	1	1	14.33	14.49	14.50	14.51	14.74	1
10M	DFT-S 64QAM	1	1	12.90	13.11	13.19	13.13	13.27	2.5
10M	DFT-S 256QAM	1	1	10.87	11.14	11.18	11.16	11.35	4.5
10M	CP QPSK	1	1	13.83	14.12	14.09	14.11	14.25	1.5

NR Conducted Power_ENDC_Tablet_Ant 2							
NR Band 78							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			650000		
		Frequency (MHz)			3750		
100M	DFT-S PI/2 BPSK	1	1		17.45		0
100M	DFT-S QPSK	1	1		17.49		0
		1	137		17.43		0
		1	271		17.41		0
		135	0		16.46		1
		135	69		17.34		0
		135	138		16.44		1
		270	0		16.42		1
100M	DFT-S 16QAM	1	1		16.39		1
100M	DFT-S 64QAM	1	1		15.05		2.5
100M	DFT-S 256QAM	1	1		13.11		4.5
100M	CP QPSK	1	1		16.01		1.5
BW	MCS Index	Channel		649668	650000	650332	3GPP MPR
		Frequency (MHz)		3745.02	3750	3754.98	
90M	DFT-S PI/2 BPSK	1	1	17.38	17.45	17.29	0
90M	DFT-S QPSK	1	1	17.44	17.46	17.27	0
		1	123	17.38	17.36	17.30	0
		1	243	17.31	17.41	17.21	0
		120	0	16.39	16.41	16.23	1
		120	63	17.24	17.31	17.18	0
		120	125	16.40	16.43	16.21	1
		243	0	16.33	16.32	16.24	1
90M	DFT-S 16QAM	1	1	16.27	16.39	16.24	1
90M	DFT-S 64QAM	1	1	15.01	15.01	14.88	2.5
90M	DFT-S 256QAM	1	1	12.99	13.08	12.88	4.5
90M	CP QPSK	1	1	15.92	15.91	15.79	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 78

BW	MCS Index	Channel		649334	650000	650666	3GPP MPR
		Frequency (MHz)		3740.01	3750	3759.99	
80M	DFT-S PI/2 BPSK	1	1	17.38	17.30	17.24	0
80M	DFT-S QPSK	1	1	17.30	17.31	17.12	0
		1	109	17.25	17.30	17.30	0
		1	215	17.22	17.33	17.08	0
		108	0	16.29	16.36	16.23	1
		108	55	17.16	17.26	17.14	0
		108	109	16.39	16.38	16.21	1
		216	0	16.27	16.29	16.19	1
80M	DFT-S 16QAM	1	1	16.26	16.32	16.22	1
80M	DFT-S 64QAM	1	1	14.87	15.01	14.85	2.5
80M	DFT-S 256QAM	1	1	12.93	12.99	12.83	4.5
80M	CP QPSK	1	1	15.81	15.90	15.72	1.5
BW	MCS Index	Channel		649000	650000	651000	3GPP MPR
		Frequency (MHz)		3735	3750	3765	
70M	DFT-S PI/2 BPSK	1	1	17.28	17.24	17.23	0
70M	DFT-S QPSK	1	1	17.40	17.36	17.11	0
		1	95	17.31	17.27	17.22	0
		1	187	17.16	17.12	17.03	0
		90	0	16.35	16.31	16.09	1
		90	50	17.16	17.12	16.99	0
		90	99	16.30	16.26	16.15	1
		180	0	16.22	16.18	16.16	1
70M	DFT-S 16QAM	1	1	16.15	16.11	16.23	1
70M	DFT-S 64QAM	1	1	14.94	14.90	14.75	2.5
70M	DFT-S 256QAM	1	1	12.98	12.94	12.83	4.5
70M	CP QPSK	1	1	15.80	15.76	15.68	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 78

BW	MCS Index	Channel		648668	650000	651332	3GPP MPR
		Frequency (MHz)		3730.02	3750	3769.98	
60M	DFT-S PI/2 BPSK	1	1	17.34	17.32	17.15	0
60M	DFT-S QPSK	1	1	17.29	17.35	17.26	0
		1	81	17.26	17.28	17.19	0
		1	160	17.28	17.31	17.10	0
		81	0	16.28	16.26	16.09	1
		81	41	17.17	17.27	17.15	0
		81	81	16.29	16.40	16.21	1
		162	0	16.28	16.25	16.17	1
60M	DFT-S 16QAM	1	1	16.27	16.27	16.12	1
60M	DFT-S 64QAM	1	1	14.89	14.94	14.87	2.5
60M	DFT-S 256QAM	1	1	12.98	12.99	12.79	4.5
60M	CP QPSK	1	1	15.86	15.78	15.74	1.5
BW	MCS Index	Channel		648334	650000	651666	3GPP MPR
		Frequency (MHz)		3725.01	3750	3774.99	
50M	DFT-S PI/2 BPSK	1	1	17.23	17.37	17.19	0
50M	DFT-S QPSK	1	1	17.40	17.45	17.20	0
		1	67	17.30	17.27	17.21	0
		1	131	17.20	17.39	17.09	0
		64	0	16.38	16.26	16.08	1
		64	35	17.19	17.22	17.17	0
		64	69	16.26	16.32	16.07	1
		128	0	16.28	16.29	16.20	1
50M	DFT-S 16QAM	1	1	16.25	16.31	16.15	1
50M	DFT-S 64QAM	1	1	14.86	14.89	14.76	2.5
50M	DFT-S 256QAM	1	1	12.85	12.95	12.74	4.5
50M	CP QPSK	1	1	15.81	15.76	15.73	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 78

BW	MCS Index	Channel		648000	650000	652000	3GPP MPR
		Frequency (MHz)		3720	3750	3780	
40M	DFT-S PI/2 BPSK	1	1	17.34	17.43	17.28	0
40M	DFT-S QPSK	1	1	17.45	17.45	17.33	0
		1	53	17.31	17.37	17.22	0
		1	104	17.30	17.33	17.20	0
		50	0	16.42	16.41	16.30	1
		50	28	17.26	17.24	17.18	0
		50	56	16.37	16.41	16.21	1
		100	0	16.28	16.34	16.29	1
40M	DFT-S 16QAM	1	1	16.33	16.29	16.25	1
40M	DFT-S 64QAM	1	1	14.97	15.00	14.92	2.5
40M	DFT-S 256QAM	1	1	12.98	13.06	12.95	4.5
40M	CP QPSK	1	1	15.96	15.91	15.78	1.5
BW	MCS Index	Channel		647668	650000	652332	3GPP MPR
		Frequency (MHz)		3715.02	3750	3784.98	
30M	DFT-S PI/2 BPSK	1	1	17.27	17.39	17.22	0
30M	DFT-S QPSK	1	1	17.33	17.37	17.26	0
		1	39	17.30	17.35	17.17	0
		1	76	17.22	17.31	17.09	0
		36	0	16.42	16.29	16.15	1
		36	21	17.17	17.15	17.11	0
		36	42	16.34	16.39	16.19	1
		75	0	16.16	16.21	16.24	1
30M	DFT-S 16QAM	1	1	16.31	16.25	16.20	1
30M	DFT-S 64QAM	1	1	14.90	14.91	14.90	2.5
30M	DFT-S 256QAM	1	1	12.98	13.02	12.91	4.5
30M	CP QPSK	1	1	15.93	15.83	15.74	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 78

BW	MCS Index	Channel		647500	650000	652500	3GPP MPR
		Frequency (MHz)		3712.5	3750	3787.5	
25M	DFT-S PI/2 BPSK	1	1	17.31	17.43	17.09	0
25M	DFT-S QPSK	1	1	17.42	17.44	17.22	0
		1	33	17.19	17.32	17.17	0
		1	63	17.22	17.20	17.09	0
		32	0	16.28	16.28	16.15	1
		32	17	17.21	17.15	16.99	0
		32	33	16.30	16.33	16.07	1
		64	0	16.15	16.20	16.15	1
25M	DFT-S 16QAM	1	1	16.18	16.16	16.23	1
25M	DFT-S 64QAM	1	1	14.97	14.93	14.89	2.5
25M	DFT-S 256QAM	1	1	12.95	12.91	12.85	4.5
25M	CP QPSK	1	1	15.93	15.79	15.69	1.5
BW	MCS Index	Channel		647334	650000	652666	3GPP MPR
		Frequency (MHz)		3710.01	3750	3789.99	
20M	DFT-S PI/2 BPSK	1	1	17.25	17.40	17.28	0
20M	DFT-S QPSK	1	1	17.30	17.35	17.33	0
		1	26	17.21	17.33	17.11	0
		1	49	17.16	17.19	17.09	0
		25	0	16.28	16.40	16.26	1
		25	13	17.13	17.15	17.05	0
		25	26	16.26	16.31	16.11	1
		50	0	16.20	16.21	16.22	1
20M	DFT-S 16QAM	1	1	16.31	16.20	16.15	1
20M	DFT-S 64QAM	1	1	14.90	14.86	14.82	2.5
20M	DFT-S 256QAM	1	1	12.95	12.97	12.80	4.5
20M	CP QPSK	1	1	15.91	15.84	15.72	1.5

NR Conducted Power_ENDC_Tablet_Ant 2

NR Band 78

BW	MCS Index	Channel		647177	650009	652841	3GPP MPR
		Frequency (MHz)		3716.52	3759	3801.48	
15M	DFT-S PI/2 BPSK	1	1	17.19	17.28	17.22	0
15M	DFT-S QPSK	1	1	17.33	17.31	17.20	0
		1	19	17.17	17.26	17.13	0
		1	36	17.18	17.21	17.20	0
		18	0	16.33	16.33	16.27	1
		18	10	17.18	17.18	17.04	0
		18	20	16.22	16.26	16.08	1
		36	0	16.14	16.31	16.16	1
15M	DFT-S 16QAM	1	1	16.20	16.14	16.14	1
15M	DFT-S 64QAM	1	1	14.93	14.97	14.89	2.5
15M	DFT-S 256QAM	1	1	12.89	13.05	12.94	4.5
15M	CP QPSK	1	1	15.96	15.81	15.68	1.5
BW	MCS Index	Channel		647000	650000	653000	3GPP MPR
		Frequency (MHz)		3705	3750	3795	
10M	DFT-S PI/2 BPSK	1	1	17.31	17.27	17.24	0
10M	DFT-S QPSK	1	1	17.29	17.29	17.18	0
		1	11	17.35	17.36	17.06	0
		1	22	17.28	17.34	16.99	0
		12	0	16.34	16.31	16.10	1
		12	6	17.10	17.18	17.10	0
		12	12	16.34	16.31	16.16	1
		24	0	16.14	16.33	16.28	1
10M	DFT-S 16QAM	1	1	16.20	16.28	16.22	1
10M	DFT-S 64QAM	1	1	14.84	14.99	14.90	2.5
10M	DFT-S 256QAM	1	1	12.91	12.99	12.83	4.5
10M	CP QPSK	1	1	15.95	15.81	15.70	1.5

Uplink Carrier Aggregation Scenarios Conducted Power (Full)

Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
Intra Band Contiguous	CA_5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	25	16.70
					1	49						1	0			25	24.09
		5	10	QPSK	1	0	20475	841.45	5	10	QPSK	1	49	20574	841.45	25	16.58
					1	49						1	0			25	24.01
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	25	16.59
					1	49						1	0			25	23.86
	CA_38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2599.8	24	15.29
					1	99						1	0			24	22.82
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	24	15.34
					1	99						1	0			24	22.90
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	24	15.28
					1	99						1	0			24	22.88
	CA_41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	24	17.15
					1	99						1	0			24	21.98
		41	20	QPSK	1	0	40086	2539.6	41	20	QPSK	1	99	40284	2559.4	24	17.40
					1	99						1	0			24	22.33
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	24	17.43
					1	99						1	0			24	22.38
		41	20	QPSK	1	0	40956	2626.6	41	20	QPSK	1	99	41154	2646.4	24	17.66
					1	99						1	0			24	22.53
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	24	17.63
					1	99						1	0			24	22.50
	CA_48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	22	15.79
					1	99						1	0			22	20.54
		48	20	QPSK	1	0	55671	3593.1	48	20	QPSK	1	99	55869	3612.9	22	15.75
					1	99						1	0			22	20.38
		48	20	QPSK	1	0	56111	3637.1	48	20	QPSK	1	99	56309	3656.9	22	15.70
					1	99						1	0			22	20.45
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	22	15.50
					1	99						1	0			22	20.26
	CA_66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	24	17.14
					1	49						1	0			24	22.05
		66	10	QPSK	1	0	132273	1740.05	66	10	QPSK	1	49	132371	1749.95	24	17.11
					1	49						1	0			24	21.97
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	24	17.09
					1	49						1	0			24	21.99

Uplink Carrier Aggregation Scenarios Conducted Power (Full)

Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
	CA_66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	24	17.26
					1	99						1	0			24	22.18
		66	20	QPSK	1	0	132223	1735.1	66	20	QPSK	1	99	132421	1754.9	24	17.07
					1	99						1	0			24	21.93
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	24	17.07
					1	99						1	0			24	21.99
	CA_2A-5A	2	20	QPSK	1	0	18700	1860	5	10	QPSK	1	99	20525	836.5	24	23.00
					1	99						1	0			24	22.94
		2	20	QPSK	1	0	18900	1880	5	10	QPSK	1	99	20525	836.5	24	23.17
					1	99						1	0			24	22.91
		2	20	QPSK	1	0	19100	1900	5	10	QPSK	1	99	20525	836.5	24	23.22
					1	99						1	0			24	22.99
	CA_2A-12A	2	20	QPSK	1	0	18700	1860	12	10	QPSK	1	49	23095	707.5	24	23.06
					1	99						1	0			24	22.96
		2	20	QPSK	1	0	18900	1880	12	10	QPSK	1	49	23095	707.5	24	23.18
					1	99						1	0			24	22.98
		2	20	QPSK	1	0	19100	1900	12	10	QPSK	1	49	23095	707.5	24	23.21
					1	99						1	0			24	23.07
	CA_2A-13A	2	20	QPSK	1	0	18700	1860	13	10	QPSK	1	49	23230	782	24	23.05
					1	99						1	0			24	22.93
		2	20	QPSK	1	0	18900	1880	13	10	QPSK	1	49	23230	782	24	23.13
					1	99						1	0			24	22.99
		2	20	QPSK	1	0	19100	1900	13	10	QPSK	1	49	23230	782	24	23.21
					1	99						1	0			24	23.05
	CA_2A-14A	2	20	QPSK	1	0	18700	1860	14	10	QPSK	1	49	23300	793	24	23.04
					1	99						1	0			24	22.92
		2	20	QPSK	1	0	18900	1880	14	10	QPSK	1	49	23300	793	24	23.11
					1	99						1	0			24	22.97
		2	20	QPSK	1	0	19100	1900	14	10	QPSK	1	49	23300	793	24	23.22
					1	99						1	0			24	23.04
	CA_2A-48A	2	20	QPSK	1	0	18700	1860	48	20	QPSK	1	99	55780	3603	24	23.02
					1	99						1	0			24	22.93
		2	20	QPSK	1	0	18900	1880	48	20	QPSK	1	99	55780	3603	24	23.14
					1	99						1	0			24	22.98
		2	20	QPSK	1	0	19100	1900	48	20	QPSK	1	99	55780	3603	24	23.23
					1	99						1	0			24	23.06

Uplink Carrier Aggregation Scenarios Conducted Power (Full)

Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
Inter Band	CA_4A-5A	4	20	QPSK	1	0	20050	1720	5	10	QPSK	1	99	20525	836.5	24	22.43
					1	99						1	0			24	22.35
		4	20	QPSK	1	0	20175	1732.5	5	10	QPSK	1	99	20525	836.5	24	22.35
					1	99						1	0			24	22.33
		4	20	QPSK	1	0	20300	1745	5	10	QPSK	1	99	20525	836.5	24	22.41
					1	99						1	0			24	22.35
	CA_4A-12A	4	20	QPSK	1	0	20050	1720	12	10	QPSK	1	49	23095	707.5	24	22.43
					1	99						1	0			24	22.37
		4	20	QPSK	1	0	20175	1732.5	12	10	QPSK	1	49	23095	707.5	24	22.35
					1	99						1	0			24	22.31
		4	20	QPSK	1	0	20300	1745	12	10	QPSK	1	49	23095	707.5	24	22.42
					1	99						1	0			24	22.35
	CA_4A-13A	4	20	QPSK	1	0	20050	1720	13	10	QPSK	1	49	23230	782	24	22.46
					1	99						1	0			24	22.36
		4	20	QPSK	1	0	20175	1732.5	13	10	QPSK	1	49	23230	782	24	22.36
					1	99						1	0			24	22.32
		4	20	QPSK	1	0	20300	1745	13	10	QPSK	1	49	23230	782	24	22.40
					1	99						1	0			24	22.37
	CA_5A-7A	5	10	QPSK	1	0	20450	829	7	20	QPSK	1	99	21100	2535	25	24.77
					1	49						1	0			25	24.74
		5	10	QPSK	1	0	20525	836.5	7	20	QPSK	1	99	21100	2535	25	24.70
					1	49						1	0			25	24.69
		5	10	QPSK	1	0	20600	844	7	20	QPSK	1	99	21100	2535	25	24.62
					1	49						1	0			25	24.64
	CA_5A-30A	5	10	QPSK	1	0	20450	829	30	10	QPSK	1	49	27710	2310	25	24.76
					1	49						1	0			25	24.75
		5	10	QPSK	1	0	20525	836.5	30	10	QPSK	1	49	27710	2310	25	24.71
					1	49						1	0			25	24.70
		5	10	QPSK	1	0	20600	844	30	10	QPSK	1	49	27710	2310	25	24.59
					1	49						1	0			25	24.66
	CA_5A-48A	5	10	QPSK	1	0	20450	829	48	20	QPSK	1	99	55780	3603	25	24.75
					1	49						1	0			25	24.74
		5	10	QPSK	1	0	20525	836.5	48	20	QPSK	1	99	55780	3603	25	24.70
					1	49						1	0			25	24.70
		5	10	QPSK	1	0	20600	844	48	20	QPSK	1	99	55780	3603	25	24.64
					1	49						1	0			25	24.64

Uplink Carrier Aggregation Scenarios Conducted Power (Full)																	
Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
	CA_5A-66A	5	10	QPSK	1	0	20450	829	66	20	QPSK	1	99	132322	1745	25	24.77
					1	49						1	0			25	24.75
		5	10	QPSK	1	0	20525	836.5	66	20	QPSK	1	99	132322	1745	25	24.71
					1	49						1	0			25	24.71
		5	10	QPSK	1	0	20600	844	66	20	QPSK	1	99	132322	1745	25	24.68
					1	49						1	0			25	24.63
	CA_12A-30A	12	10	QPSK	1	0	23060	704	30	10	QPSK	1	49	27710	2310	24	23.26
					1	49						1	0			24	23.06
		12	10	QPSK	1	0	23095	707.5	30	10	QPSK	1	49	27710	2310	24	23.13
					1	49						1	0			24	23.00
		12	10	QPSK	1	0	23130	711	30	10	QPSK	1	49	27710	2310	24	23.05
					1	49						1	0			24	22.89
	CA_12A-66A	12	10	QPSK	1	0	23060	704	66	20	QPSK	1	99	132322	1745	24	23.23
					1	49						1	0			24	23.06
		12	10	QPSK	1	0	23095	707.5	66	20	QPSK	1	99	132322	1745	24	23.09
					1	49						1	0			24	22.98
		12	10	QPSK	1	0	23130	711	66	20	QPSK	1	99	132322	1745	24	23.03
					1	49						1	0			24	22.87
	CA_13A-48A	13	10	QPSK	1	0	23230	782	48	20	QPSK	1	99	55780	3603	24	22.85
					1	49						1	0			24	22.74
	CA_13A-66A	13	10	QPSK	1	0	23230	782	66	20	QPSK	1	99	132322	1745	24	22.89
					1	49						1	0			24	22.72
	CA_14A-30A	14	10	QPSK	1	0	23300	793	30	10	QPSK	1	49	27710	2310	24	22.92
					1	49						1	0			24	22.88
	CA_14A-66A	14	10	QPSK	1	0	23300	793	66	20	QPSK	1	99	132322	1745	24	22.91
					1	49						1	0			24	22.90
	CA_25A-26A	25	20	QPSK	1	0	26140	1860	26	20	QPSK	1	99	26865	831.5	24	22.81
					1	99						1	0			24	22.66
		25	20	QPSK	1	0	26365	1882.5	26	20	QPSK	1	99	26865	831.5	24	22.95
					1	99						1	0			24	22.83
		25	20	QPSK	1	0	26590	1905	26	20	QPSK	1	99	26865	831.5	24	23.10
					1	99						1	0			24	22.97
	CA_48A-66A	48	20	QPSK	1	0	55340	3560	66	20	QPSK	1	99	132322	1745	22	21.05
					1	99						1	0			22	20.80
		48	20	QPSK	1	0	55780	3603	66	20	QPSK	1	99	132322	1745	22	21.04
					1	99						1	0			22	20.79
		48	20	QPSK	1	0	56210	3647	66	20	QPSK	1	99	132322	1745	22	21.01
					1	99						1	0			22	20.75
		48	20	QPSK	1	0	56640	3690	66	20	QPSK	1	99	132322	1745	22	20.81
					1	99						1	0			22	20.62

Uplink Carrier Aggregation Scenarios Conducted Power_Laptop_Ant 0

Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
Intra Band Contiguous	CA_5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	20	11.70
					1	49						1	0			20	19.09
		5	10	QPSK	1	0	20475	841.45	5	10	QPSK	1	49	20574	841.45	20	11.58
					1	49						1	0			20	19.01
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	20	11.59
					1	49						1	0			20	18.86
	CA_38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2599.8	20	10.79
					1	99						1	0			20	18.32
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	20	10.84
					1	99						1	0			20	18.40
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	20	10.78
					1	99						1	0			20	18.38
	CA_41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	23	16.15
					1	99						1	0			23	20.98
		41	20	QPSK	1	0	40086	2539.6	41	20	QPSK	1	99	40284	2559.4	23	16.40
					1	99						1	0			23	21.33
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	23	16.43
					1	99						1	0			23	21.38
		41	20	QPSK	1	0	40956	2626.6	41	20	QPSK	1	99	41154	2646.4	23	16.66
					1	99						1	0			23	21.53
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	23	16.63
					1	99						1	0			23	21.50
	CA_48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	19.5	13.29
					1	99						1	0			19.5	18.04
		48	20	QPSK	1	0	55671	3593.1	48	20	QPSK	1	99	55869	3612.9	19.5	13.25
					1	99						1	0			19.5	17.88
		48	20	QPSK	1	0	56111	3637.1	48	20	QPSK	1	99	56309	3656.9	19.5	13.20
					1	99						1	0			19.5	17.96
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	19.5	13.00
					1	99						1	0			19.5	17.76
	CA_66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	18.5	11.64
					1	49						1	0			18.5	16.55
		66	10	QPSK	1	0	132273	1740.05	66	10	QPSK	1	49	132371	1749.95	18.5	11.61
					1	49						1	0			18.5	16.47
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	18.5	11.59
					1	49						1	0			18.5	16.49

Uplink Carrier Aggregation Scenarios Conducted Power_Laptop_Ant 0

Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
	CA_66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	18.5	11.76
					1	99						1	0			18.5	16.68
		66	20	QPSK	1	0	132223	1735.1	66	20	QPSK	1	99	132421	1754.9	18.5	11.57
					1	99						1	0			18.5	16.43
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	18.5	11.57
					1	99						1	0			18.5	16.49
	CA_2A-5A	2	20	QPSK	1	0	18700	1860	5	10	QPSK	1	99	20525	836.5	18	17.00
					1	99						1	0			18	16.94
		2	20	QPSK	1	0	18900	1880	5	10	QPSK	1	99	20525	836.5	18	17.17
					1	99						1	0			18	16.91
		2	20	QPSK	1	0	19100	1900	5	10	QPSK	1	99	20525	836.5	18	17.22
					1	99						1	0			18	16.99
	CA_2A-12A	2	20	QPSK	1	0	18700	1860	12	10	QPSK	1	49	23095	707.5	18	17.06
					1	99						1	0			18	16.96
		2	20	QPSK	1	0	18900	1880	12	10	QPSK	1	49	23095	707.5	18	17.18
					1	99						1	0			18	16.98
		2	20	QPSK	1	0	19100	1900	12	10	QPSK	1	49	23095	707.5	18	17.21
					1	99						1	0			18	17.07
	CA_2A-13A	2	20	QPSK	1	0	18700	1860	13	10	QPSK	1	49	23230	782	18	17.05
					1	99						1	0			18	16.93
		2	20	QPSK	1	0	18900	1880	13	10	QPSK	1	49	23230	782	18	17.13
					1	99						1	0			18	16.99
		2	20	QPSK	1	0	19100	1900	13	10	QPSK	1	49	23230	782	18	17.21
					1	99						1	0			18	17.05
	CA_2A-14A	2	20	QPSK	1	0	18700	1860	14	10	QPSK	1	49	23300	793	18	17.04
					1	99						1	0			18	16.92
		2	20	QPSK	1	0	18900	1880	14	10	QPSK	1	49	23300	793	18	17.11
					1	99						1	0			18	16.97
		2	20	QPSK	1	0	19100	1900	14	10	QPSK	1	49	23300	793	18	17.22
					1	99						1	0			18	17.04
	CA_2A-48A	2	20	QPSK	1	0	18700	1860	48	20	QPSK	1	99	55780	3603	18	17.02
					1	99						1	0			18	16.93
		2	20	QPSK	1	0	18900	1880	48	20	QPSK	1	99	55780	3603	18	17.14
					1	99						1	0			18	16.98
		2	20	QPSK	1	0	19100	1900	48	20	QPSK	1	99	55780	3603	18	17.23
					1	99						1	0			18	17.06

Uplink Carrier Aggregation Scenarios Conducted Power_Laptop_Ant 0

Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
Inter Band	CA_4A-5A	4	20	QPSK	1	0	20050	1720	5	10	QPSK	1	99	20525	836.5	19	17.43
					1	99						1	0			19	17.35
		4	20	QPSK	1	0	20175	1732.5	5	10	QPSK	1	99	20525	836.5	19	17.35
					1	99						1	0			19	17.33
		4	20	QPSK	1	0	20300	1745	5	10	QPSK	1	99	20525	836.5	19	17.41
					1	99						1	0			19	17.35
	CA_4A-12A	4	20	QPSK	1	0	20050	1720	12	10	QPSK	1	49	23095	707.5	19	17.43
					1	99						1	0			19	17.37
		4	20	QPSK	1	0	20175	1732.5	12	10	QPSK	1	49	23095	707.5	19	17.35
					1	99						1	0			19	17.31
		4	20	QPSK	1	0	20300	1745	12	10	QPSK	1	49	23095	707.5	19	17.42
					1	99						1	0			19	17.35
	CA_4A-13A	4	20	QPSK	1	0	20050	1720	13	10	QPSK	1	49	23230	782	19	17.46
					1	99						1	0			19	17.36
		4	20	QPSK	1	0	20175	1732.5	13	10	QPSK	1	49	23230	782	19	17.36
					1	99						1	0			19	17.32
		4	20	QPSK	1	0	20300	1745	13	10	QPSK	1	49	23230	782	19	17.40
					1	99						1	0			19	17.37
	CA_5A-7A	5	10	QPSK	1	0	20450	829	7	20	QPSK	1	99	21100	2535	20	19.77
					1	49						1	0			20	19.74
		5	10	QPSK	1	0	20525	836.5	7	20	QPSK	1	99	21100	2535	20	19.70
					1	49						1	0			20	19.69
		5	10	QPSK	1	0	20600	844	7	20	QPSK	1	99	21100	2535	20	19.62
					1	49						1	0			20	19.64
	CA_5A-30A	5	10	QPSK	1	0	20450	829	30	10	QPSK	1	49	27710	2310	20	19.76
					1	49						1	0			20	19.75
		5	10	QPSK	1	0	20525	836.5	30	10	QPSK	1	49	27710	2310	20	19.71
					1	49						1	0			20	19.70
		5	10	QPSK	1	0	20600	844	30	10	QPSK	1	49	27710	2310	20	19.59
					1	49						1	0			20	19.66
	CA_5A-48A	5	10	QPSK	1	0	20450	829	48	20	QPSK	1	99	55780	3603	20	14.75
					1	49						1	0			20	14.74
		5	10	QPSK	1	0	20525	836.5	48	20	QPSK	1	99	55780	3603	20	14.70
					1	49						1	0			20	14.70
		5	10	QPSK	1	0	20600	844	48	20	QPSK	1	99	55780	3603	20	14.64
					1	49						1	0			20	14.64

Uplink Carrier Aggregation Scenarios Conducted Power_Laptop_Ant 0

Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
	CA_5A-66A	5	10	QPSK	1	0	20450	829	66	20	QPSK	1	99	132322	1745	20	14.77
					1	49						1	0			20	14.75
		5	10	QPSK	1	0	20525	836.5	66	20	QPSK	1	99	132322	1745	20	14.71
					1	49						1	0			20	14.71
		5	10	QPSK	1	0	20600	844	66	20	QPSK	1	99	132322	1745	20	14.68
					1	49						1	0			20	14.63
	CA_12A-30A	12	10	QPSK	1	0	23060	704	30	10	QPSK	1	49	27710	2310	23	22.26
					1	49						1	0			23	22.06
		12	10	QPSK	1	0	23095	707.5	30	10	QPSK	1	49	27710	2310	23	22.13
					1	49						1	0			23	22.01
		12	10	QPSK	1	0	23130	711	30	10	QPSK	1	49	27710	2310	23	22.05
					1	49						1	0			23	21.89
	CA_12A-66A	12	10	QPSK	1	0	23060	704	66	20	QPSK	1	99	132322	1745	23	22.23
					1	49						1	0			23	22.06
		12	10	QPSK	1	0	23095	707.5	66	20	QPSK	1	99	132322	1745	23	22.09
					1	49						1	0			23	21.98
		12	10	QPSK	1	0	23130	711	66	20	QPSK	1	99	132322	1745	23	22.03
					1	49						1	0			23	21.87
	CA_13A-48A	13	10	QPSK	1	0	23230	782	48	20	QPSK	1	99	55780	3603	23	21.85
					1	49						1	0			23	21.74
	CA_13A-66A	13	10	QPSK	1	0	23230	782	66	20	QPSK	1	99	132322	1745	23	21.89
					1	49						1	0			23	21.72
	CA_14A-30A	14	10	QPSK	1	0	23300	793	30	10	QPSK	1	49	27710	2310	23	21.92
					1	49						1	0			23	21.88
	CA_14A-66A	14	10	QPSK	1	0	23300	793	66	20	QPSK	1	99	132322	1745	23	21.91
					1	49						1	0			23	21.90
	CA_25A-26A	25	20	QPSK	1	0	26140	1860	26	20	QPSK	1	99	26865	831.5	17.5	16.31
					1	99						1	0			17.5	16.16
		25	20	QPSK	1	0	26365	1882.5	26	20	QPSK	1	99	26865	831.5	17.5	16.45
					1	99						1	0			17.5	16.33
		25	20	QPSK	1	0	26590	1905	26	20	QPSK	1	99	26865	831.5	17.5	16.60
					1	99						1	0			17.5	16.47
	CA_48A-66A	48	20	QPSK	1	0	55340	3560	66	20	QPSK	1	99	132322	1745	19.5	18.50
					1	99						1	0			19.5	18.30
		48	20	QPSK	1	0	55780	3603	66	20	QPSK	1	99	132322	1745	19.5	18.54
					1	99						1	0			19.5	18.29
		48	20	QPSK	1	0	56210	3647	66	20	QPSK	1	99	132322	1745	19.5	18.51
					1	99						1	0			19.5	18.25
		48	20	QPSK	1	0	56640	3690	66	20	QPSK	1	99	132322	1745	19.5	18.31
					1	99						1	0			19.5	18.12

Uplink Carrier Aggregation Scenarios Conducted Power_Laptop_Ant 2

Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
Intra Band Contiguous	CA_38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2599.8	23	14.79
					1	99						1	0			23	22.32
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	23	14.84
					1	99						1	0			23	22.40
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	23	14.78
					1	99						1	0			23	22.38
	CA_41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	23	17.15
					1	99						1	0			23	21.98
		41	20	QPSK	1	0	40086	2539.6	41	20	QPSK	1	99	40284	2559.4	23	17.40
					1	99						1	0			23	22.33
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	23	17.43
					1	99						1	0			23	22.38
		41	20	QPSK	1	0	40956	2626.6	41	20	QPSK	1	99	41154	2646.4	23	17.66
					1	99						1	0			23	22.53
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	23	17.63
					1	99						1	0			23	22.50
	CA_66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	22.5	17.14
					1	49						1	0			22.5	22.05
		66	10	QPSK	1	0	132273	1740.05	66	10	QPSK	1	49	132371	1749.95	22.5	17.11
					1	49						1	0			22.5	21.97
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	22.5	17.09
					1	49						1	0			22.5	21.99
	CA_66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	22.5	17.26
					1	99						1	0			22.5	22.18
		66	20	QPSK	1	0	132223	1735.1	66	20	QPSK	1	99	132421	1754.9	22.5	17.07
					1	99						1	0			22.5	21.93
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	22.5	17.07
					1	99						1	0			22.5	21.99
	CA_2A-5A	2	20	QPSK	1	0	18700	1860	5	10	QPSK	1	99	20525	836.5	18.5	17.00
					1	99						1	0			18.5	16.94
		2	20	QPSK	1	0	18900	1880	5	10	QPSK	1	99	20525	836.5	18.5	17.17
					1	99						1	0			18.5	16.91
		2	20	QPSK	1	0	19100	1900	5	10	QPSK	1	99	20525	836.5	18.5	17.22
					1	99						1	0			18.5	16.99
	CA_2A-12A	2	20	QPSK	1	0	18700	1860	12	10	QPSK	1	49	23095	707.5	18.5	17.06
					1	99						1	0			18.5	16.96
		2	20	QPSK	1	0	18900	1880	12	10	QPSK	1	49	23095	707.5	18.5	17.18
					1	99						1	0			18.5	16.98
		2	20	QPSK	1	0	19100	1900	12	10	QPSK	1	49	23095	707.5	18.5	17.21
					1	99						1	0			18.5	17.07

Uplink Carrier Aggregation Scenarios Conducted Power_Laptop_Ant 2

Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
Inter Band	CA_2A-13A	2	20	QPSK	1	0	18700	1860	13	10	QPSK	1	49	23230	782	18.5	17.05
					1	99						1	0			18.5	16.93
		2	20	QPSK	1	0	18900	1880	13	10	QPSK	1	49	23230	782	18.5	17.13
					1	99						1	0			18.5	16.99
		2	20	QPSK	1	0	19100	1900	13	10	QPSK	1	49	23230	782	18.5	17.21
					1	99						1	0			18.5	17.05
	CA_2A-14A	2	20	QPSK	1	0	18700	1860	14	10	QPSK	1	49	23300	793	18.5	17.04
					1	99						1	0			18.5	16.92
		2	20	QPSK	1	0	18900	1880	14	10	QPSK	1	49	23300	793	18.5	17.11
					1	99						1	0			18.5	16.97
		2	20	QPSK	1	0	19100	1900	14	10	QPSK	1	49	23300	793	18.5	17.22
					1	99						1	0			18.5	17.04
	CA_2A-48A	2	20	QPSK	1	0	18700	1860	48	20	QPSK	1	99	55780	3603	18.5	17.02
					1	99						1	0			18.5	16.93
		2	20	QPSK	1	0	18900	1880	48	20	QPSK	1	99	55780	3603	18.5	17.14
					1	99						1	0			18.5	16.98
		2	20	QPSK	1	0	19100	1900	48	20	QPSK	1	99	55780	3603	18.5	17.23
					1	99						1	0			18.5	17.06
	CA_4A-5A	4	20	QPSK	1	0	20050	1720	5	10	QPSK	1	99	20525	836.5	22	20.43
					1	99						1	0			22	20.35
		4	20	QPSK	1	0	20175	1732.5	5	10	QPSK	1	99	20525	836.5	22	20.35
					1	99						1	0			22	20.33
		4	20	QPSK	1	0	20300	1745	5	10	QPSK	1	99	20525	836.5	22	20.41
					1	99						1	0			22	20.35
	CA_4A-12A	4	20	QPSK	1	0	20050	1720	12	10	QPSK	1	49	23095	707.5	22	20.43
					1	99						1	0			22	20.37
		4	20	QPSK	1	0	20175	1732.5	12	10	QPSK	1	49	23095	707.5	22	20.35
					1	99						1	0			22	20.31
		4	20	QPSK	1	0	20300	1745	12	10	QPSK	1	49	23095	707.5	22	20.42
					1	99						1	0			22	20.35
	CA_4A-13A	4	20	QPSK	1	0	20050	1720	13	10	QPSK	1	49	23230	782	22	20.46
					1	99						1	0			22	20.36
		4	20	QPSK	1	0	20175	1732.5	13	10	QPSK	1	49	23230	782	22	20.36
					1	99						1	0			22	20.32
		4	20	QPSK	1	0	20300	1745	13	10	QPSK	1	49	23230	782	22	20.40
					1	99						1	0			22	20.37

Uplink Carrier Aggregation Scenarios Conducted Power_Laptop_Ant 2																	
Confugure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
	CA_25A-26A	25	20	QPSK	1	0	26140	1860	26	20	QPSK	1	99	26865	831.5	18.5	17.20
					1	99						1	0				17.05
		25	20	QPSK	1	0	26365	1882.5	26	20	QPSK	1	99	26865	831.5	18.5	17.34
					1	99						1	0				17.22
		25	20	QPSK	1	0	26590	1905	26	20	QPSK	1	99	26865	831.5	18.5	17.49
					1	99						1	0				17.36
		25	20	QPSK	1	0	26140	1860	26	20	QPSK	1	99	26865	831.5	18.5	17.20
					1	99						1	0				17.05
		25	20	QPSK	1	0	26365	1882.5	26	20	QPSK	1	99	26865	831.5	18.5	17.34
					1	99						1	0				17.22

Uplink Carrier Aggregation Scenarios Conducted Power_Tablet_Ant 0																	
Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
Intra Band Contiguous	CA_5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	18	9.73
					1	49						1	0			18	17.12
		5	10	QPSK	1	0	20475	841.45	5	10	QPSK	1	49	20574	841.45	18	9.61
					1	49						1	0			18	17.04
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	18	9.62
					1	49						1	0			18	16.89
	CA_38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2599.8	17.5	8.82
					1	99						1	0			17.5	16.35
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	17.5	8.87
					1	99						1	0			17.5	16.43
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	17.5	8.81
					1	99						1	0			17.5	16.41
	CA_41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	20.5	13.69
					1	99						1	0			20.5	18.52
		41	20	QPSK	1	0	40086	2539.6	41	20	QPSK	1	99	40284	2559.4	20.5	13.94
					1	99						1	0			20.5	18.87
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	20.5	13.97
					1	99						1	0			20.5	18.92
		41	20	QPSK	1	0	40956	2626.6	41	20	QPSK	1	99	41154	2646.4	20.5	14.20
					1	99						1	0			20.5	19.07
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	20.5	14.17
					1	99						1	0			20.5	19.04
	CA_48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	16.5	10.31
					1	99						1	0			16.5	15.06
		48	20	QPSK	1	0	55671	3593.1	48	20	QPSK	1	99	55869	3612.9	16.5	10.27
					1	99						1	0			16.5	14.90
		48	20	QPSK	1	0	56111	3637.1	48	20	QPSK	1	99	56309	3656.9	16.5	10.22
					1	99						1	0			16.5	14.97
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	16.5	10.02
					1	99						1	0			16.5	14.78
	CA_66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	18.5	11.68
					1	49						1	0			18.5	16.59
		66	10	QPSK	1	0	132273	1740.05	66	10	QPSK	1	49	132371	1749.95	18.5	11.65
					1	49						1	0			18.5	16.51
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	18.5	11.63
					1	49						1	0			18.5	16.53

Uplink Carrier Aggregation Scenarios Conducted Power_Tablet_Ant 0																	
Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
	CA_66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	18.5	11.80
					1	99						1	0			18.5	16.72
		66	20	QPSK	1	0	132223	1735.1	66	20	QPSK	1	99	132421	1754.9	18.5	11.61
					1	99						1	0			18.5	16.47
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	18.5	11.61
					1	99						1	0			18.5	16.53
	CA_2A-5A	2	20	QPSK	1	0	18700	1860	5	10	QPSK	1	99	20525	836.5	16	15.02
					1	99						1	0			16	14.96
		2	20	QPSK	1	0	18900	1880	5	10	QPSK	1	99	20525	836.5	16	15.19
					1	99						1	0			16	14.93
		2	20	QPSK	1	0	19100	1900	5	10	QPSK	1	99	20525	836.5	16	15.24
					1	99						1	0			16	15.01
	CA_2A-12A	2	20	QPSK	1	0	18700	1860	12	10	QPSK	1	49	23095	707.5	16	15.08
					1	99						1	0			16	14.98
		2	20	QPSK	1	0	18900	1880	12	10	QPSK	1	49	23095	707.5	16	15.20
					1	99						1	0			16	15.00
		2	20	QPSK	1	0	19100	1900	12	10	QPSK	1	49	23095	707.5	16	15.23
					1	99						1	0			16	15.09
	CA_2A-13A	2	20	QPSK	1	0	18700	1860	13	10	QPSK	1	49	23230	782	16	15.07
					1	99						1	0			16	14.95
		2	20	QPSK	1	0	18900	1880	13	10	QPSK	1	49	23230	782	16	15.15
					1	99						1	0			16	15.01
		2	20	QPSK	1	0	19100	1900	13	10	QPSK	1	49	23230	782	16	15.23
					1	99						1	0			16	15.07
	CA_2A-14A	2	20	QPSK	1	0	18700	1860	14	10	QPSK	1	49	23300	793	16	15.06
					1	99						1	0			16	14.94
		2	20	QPSK	1	0	18900	1880	14	10	QPSK	1	49	23300	793	16	15.13
					1	99						1	0			16	14.99
		2	20	QPSK	1	0	19100	1900	14	10	QPSK	1	49	23300	793	16	15.24
					1	99						1	0			16	15.06
	CA_2A-48A	2	20	QPSK	1	0	18700	1860	48	20	QPSK	1	99	55780	3603	16	15.04
					1	99						1	0			16	14.95
		2	20	QPSK	1	0	18900	1880	48	20	QPSK	1	99	55780	3603	16	15.16
					1	99						1	0			16	15.00
		2	20	QPSK	1	0	19100	1900	48	20	QPSK	1	99	55780	3603	16	15.25
					1	99						1	0			16	15.08

Uplink Carrier Aggregation Scenarios Conducted Power_Tablet_Ant 0																	
Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
Inter Band	CA_4A-5A	4	20	QPSK	1	0	20050	1720	5	10	QPSK	1	99	20525	836.5	18.5	16.96
					1	99						1	0			18.5	16.88
		4	20	QPSK	1	0	20175	1732.5	5	10	QPSK	1	99	20525	836.5	18.5	16.88
					1	99						1	0			18.5	16.86
		4	20	QPSK	1	0	20300	1745	5	10	QPSK	1	99	20525	836.5	18.5	16.94
					1	99						1	0			18.5	16.88
	CA_4A-12A	4	20	QPSK	1	0	20050	1720	12	10	QPSK	1	49	23095	707.5	18.5	16.96
					1	99						1	0			18.5	16.90
		4	20	QPSK	1	0	20175	1732.5	12	10	QPSK	1	49	23095	707.5	18.5	16.88
					1	99						1	0			18.5	16.84
		4	20	QPSK	1	0	20300	1745	12	10	QPSK	1	49	23095	707.5	18.5	16.95
					1	99						1	0			18.5	16.88
	CA_4A-13A	4	20	QPSK	1	0	20050	1720	13	10	QPSK	1	49	23230	782	18.5	16.99
					1	99						1	0			18.5	16.89
		4	20	QPSK	1	0	20175	1732.5	13	10	QPSK	1	49	23230	782	18.5	16.89
					1	99						1	0			18.5	16.85
		4	20	QPSK	1	0	20300	1745	13	10	QPSK	1	49	23230	782	18.5	16.93
					1	99						1	0			18.5	16.90
	CA_5A-7A	5	10	QPSK	1	0	20450	829	7	20	QPSK	1	99	21100	2535	18	17.79
					1	49						1	0			18	17.76
		5	10	QPSK	1	0	20525	836.5	7	20	QPSK	1	99	21100	2535	18	17.72
					1	49						1	0			18	17.71
		5	10	QPSK	1	0	20600	844	7	20	QPSK	1	99	21100	2535	18	17.64
					1	49						1	0			18	17.66
	CA_5A-30A	5	10	QPSK	1	0	20450	829	30	10	QPSK	1	49	27710	2310	18	17.78
					1	49						1	0			18	17.77
		5	10	QPSK	1	0	20525	836.5	30	10	QPSK	1	49	27710	2310	18	17.73
					1	49						1	0			18	17.72
		5	10	QPSK	1	0	20600	844	30	10	QPSK	1	49	27710	2310	18	17.61
					1	49						1	0			18	17.68
	CA_5A-48A	5	10	QPSK	1	0	20450	829	48	20	QPSK	1	99	55780	3603	18	17.77
					1	49						1	0			18	17.76
		5	10	QPSK	1	0	20525	836.5	48	20	QPSK	1	99	55780	3603	18	17.72
					1	49						1	0			18	17.72
		5	10	QPSK	1	0	20600	844	48	20	QPSK	1	99	55780	3603	18	17.66
					1	49						1	0			18	17.66

Uplink Carrier Aggregation Scenarios Conducted Power_Tablet_Ant 0																	
Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
	CA_5A-66A	5	10	QPSK	1	0	20450	829	66	20	QPSK	1	99	132322	1745	18	17.79
					1	49						1	0			18	17.77
		5	10	QPSK	1	0	20525	836.5	66	20	QPSK	1	99	132322	1745	18	17.73
					1	49						1	0			18	17.73
		5	10	QPSK	1	0	20600	844	66	20	QPSK	1	99	132322	1745	18	17.70
					1	49						1	0			18	17.65
	CA_12A-30A	12	10	QPSK	1	0	23060	704	30	10	QPSK	1	49	27710	2310	19.5	18.79
					1	49						1	0			19.5	18.59
		12	10	QPSK	1	0	23095	707.5	30	10	QPSK	1	49	27710	2310	19.5	18.66
					1	49						1	0			19.5	18.53
		12	10	QPSK	1	0	23130	711	30	10	QPSK	1	49	27710	2310	19.5	18.58
					1	49						1	0			19.5	18.42
	CA_12A-66A	12	10	QPSK	1	0	23060	704	66	20	QPSK	1	99	132322	1745	19.5	18.76
					1	49						1	0			19.5	18.59
		12	10	QPSK	1	0	23095	707.5	66	20	QPSK	1	99	132322	1745	19.5	18.62
					1	49						1	0			19.5	18.51
		12	10	QPSK	1	0	23130	711	66	20	QPSK	1	99	132322	1745	19.5	18.56
					1	49						1	0			19.5	18.40
	CA_13A-48A	13	10	QPSK	1	0	23230	782	48	20	QPSK	1	99	55780	3603	19	17.91
					1	49						1	0			19	17.80
	CA_13A-66A	13	10	QPSK	1	0	23230	782	66	20	QPSK	1	99	132322	1745	19	17.95
					1	49						1	0			19	17.78
	CA_14A-30A	14	10	QPSK	1	0	23300	793	30	10	QPSK	1	49	27710	2310	19	17.98
					1	49						1	0			19	17.94
	CA_14A-66A	14	10	QPSK	1	0	23300	793	66	20	QPSK	1	99	132322	1745	19	17.97
					1	49						1	0			19	17.96
	CA_25A-26A	25	20	QPSK	1	0	26140	1860	26	20	QPSK	1	99	26865	831.5	17	15.85
					1	99						1	0			17	15.70
		25	20	QPSK	1	0	26365	1882.5	26	20	QPSK	1	99	26865	831.5	17	15.99
					1	99						1	0			17	15.87
		25	20	QPSK	1	0	26590	1905	26	20	QPSK	1	99	26865	831.5	17	16.14
					1	99						1	0			17	16.01
	CA_48A-66A	48	20	QPSK	1	0	55340	3560	66	20	QPSK	1	99	132322	1745	16.5	15.68
					1	99						1	0			16.5	15.64
		48	20	QPSK	1	0	55780	3603	66	20	QPSK	1	99	132322	1745	16.5	15.11
					1	99						1	0			16.5	15.08
		48	20	QPSK	1	0	56210	3647	66	20	QPSK	1	99	132322	1745	16.5	15.04
					1	99						1	0			16.5	15.01
		48	20	QPSK	1	0	56640	3690	66	20	QPSK	1	99	132322	1745	16.5	15.34
					1	99						1	0			16.5	15.34

Uplink Carrier Aggregation Scenarios Conducted Power_Tablet_Ant 2																	
Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
Intra Band Contiguous	CA_38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2599.8	21.5	12.80
					1	99						1	0			21.5	20.33
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	21.5	12.85
					1	99						1	0			21.5	20.41
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	21.5	12.79
					1	99						1	0			21.5	20.39
	CA_41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	18.5	11.71
					1	99						1	0			18.5	16.54
		41	20	QPSK	1	0	40086	2539.6	41	20	QPSK	1	99	40284	2559.4	18.5	11.96
					1	99						1	0			18.5	16.89
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	18.5	11.99
					1	99						1	0			18.5	16.94
		41	20	QPSK	1	0	40956	2626.6	41	20	QPSK	1	99	41154	2646.4	18.5	12.22
					1	99						1	0			18.5	17.09
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	18.5	12.19
					1	99						1	0			18.5	17.06
	CA_48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	13.5	7.35
					1	99						1	0			13.5	12.10
		48	20	QPSK	1	0	55671	3593.1	48	20	QPSK	1	99	55869	3612.9	13.5	7.31
					1	99						1	0			13.5	11.94
		48	20	QPSK	1	0	56111	3637.1	48	20	QPSK	1	99	56309	3656.9	13.5	7.26
					1	99						1	0			13.5	12.01
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	13.5	7.06
					1	99						1	0			13.5	11.82
	CA_66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	21	14.16
					1	49						1	0			21	19.07
		66	10	QPSK	1	0	132273	1740.05	66	10	QPSK	1	49	132371	1749.95	21	14.13
					1	49						1	0			21	18.99
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	21	14.11
					1	49						1	0			21	19.01
	CA_66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	21	14.28
					1	99						1	0			21	19.20
		66	20	QPSK	1	0	132223	1735.1	66	20	QPSK	1	99	132421	1754.9	21	14.09
					1	99						1	0			21	18.95
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	21	14.09
					1	99						1	0			21	19.01

Uplink Carrier Aggregation Scenarios Conducted Power_Tablet_Ant 2																	
Configure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
Inter Band	CA_2A-5A	2	20	QPSK	1	0	18700	1860	5	10	QPSK	1	99	20525	836.5	17	16.01
					1	99						1	0			17	15.94
		2	20	QPSK	1	0	18900	1880	5	10	QPSK	1	99	20525	836.5	17	16.17
					1	99						1	0			17	15.91
		2	20	QPSK	1	0	19100	1900	5	10	QPSK	1	99	20525	836.5	17	16.22
					1	99						1	0			17	15.99
	CA_2A-12A	2	20	QPSK	1	0	18700	1860	12	10	QPSK	1	49	23095	707.5	17	16.06
					1	99						1	0			17	15.96
		2	20	QPSK	1	0	18900	1880	12	10	QPSK	1	49	23095	707.5	17	16.18
					1	99						1	0			17	15.98
		2	20	QPSK	1	0	19100	1900	12	10	QPSK	1	49	23095	707.5	17	16.21
					1	99						1	0			17	16.07
	CA_2A-13A	2	20	QPSK	1	0	18700	1860	13	10	QPSK	1	49	23230	782	17	16.05
					1	99						1	0			17	15.93
		2	20	QPSK	1	0	18900	1880	13	10	QPSK	1	49	23230	782	17	16.13
					1	99						1	0			17	15.99
		2	20	QPSK	1	0	19100	1900	13	10	QPSK	1	49	23230	782	17	16.21
					1	99						1	0			17	16.05
	CA_2A-14A	2	20	QPSK	1	0	18700	1860	14	10	QPSK	1	49	23300	793	17	16.04
					1	99						1	0			17	15.92
		2	20	QPSK	1	0	18900	1880	14	10	QPSK	1	49	23300	793	17	16.11
					1	99						1	0			17	15.97
		2	20	QPSK	1	0	19100	1900	14	10	QPSK	1	49	23300	793	17	16.22
					1	99						1	0			17	16.04
	CA_2A-48A	2	20	QPSK	1	0	18700	1860	48	20	QPSK	1	99	55780	3603	17	16.02
					1	99						1	0			17	15.93
		2	20	QPSK	1	0	18900	1880	48	20	QPSK	1	99	55780	3603	17	16.14
					1	99						1	0			17	15.98
		2	20	QPSK	1	0	19100	1900	48	20	QPSK	1	99	55780	3603	17	16.23
					1	99						1	0			17	16.06
	CA_4A-5A	4	20	QPSK	1	0	20050	1720	5	10	QPSK	1	99	20525	836.5	21	19.39
					1	99						1	0			21	19.31
		4	20	QPSK	1	0	20175	1732.5	5	10	QPSK	1	99	20525	836.5	21	19.31
					1	99						1	0			21	19.29
		4	20	QPSK	1	0	20300	1745	5	10	QPSK	1	99	20525	836.5	21	19.37
					1	99						1	0			21	19.31

Uplink Carrier Aggregation Scenarios Conducted Power_Tablet_Ant 2

Confugure	Combination	PCC							SCC							Measurement Power	
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Tx Power with UL-CA Active (dBm)
																	Total
	CA_4A-12A	4	20	QPSK	1	0	20050	1720	12	10	QPSK	1	49	23095	707.5	21	19.39
					1	99						1	0			21	19.33
		4	20	QPSK	1	0	20175	1732.5	12	10	QPSK	1	49	23095	707.5	21	19.31
					1	99						1	0			21	19.27
		4	20	QPSK	1	0	20300	1745	12	10	QPSK	1	49	23095	707.5	21	19.38
					1	99						1	0			21	19.31
	CA_4A-13A	4	20	QPSK	1	0	20050	1720	13	10	QPSK	1	49	23230	782	21	19.42
					1	99						1	0			21	19.32
		4	20	QPSK	1	0	20175	1732.5	13	10	QPSK	1	49	23230	782	21	19.32
					1	99						1	0			21	19.28
		4	20	QPSK	1	0	20300	1745	13	10	QPSK	1	49	23230	782	21	19.36
					1	99						1	0			21	19.33
	CA_25A-26A	25	20	QPSK	1	0	26140	1860	26	20	QPSK	1	99	26865	831.5	17	15.93
					1	99						1	0			17	15.78
		25	20	QPSK	1	0	26365	1882.5	26	20	QPSK	1	99	26865	831.5	17	16.07
					1	99						1	0			17	15.95
		25	20	QPSK	1	0	26590	1905	26	20	QPSK	1	99	26865	831.5	17	16.22
					1	99						1	0			17	16.09
	CA_48A-66A	48	20	QPSK	1	0	55340	3560	66	20	QPSK	1	99	132322	1745	13.5	12.82
					1	99						1	0			13.5	12.78
		48	20	QPSK	1	0	55780	3603	66	20	QPSK	1	99	132322	1745	13.5	12.25
					1	99						1	0			13.5	12.22
		48	20	QPSK	1	0	56210	3647	66	20	QPSK	1	99	132322	1745	13.5	12.18
					1	99						1	0			13.5	12.15
		48	20	QPSK	1	0	56640	3690	66	20	QPSK	1	99	132322	1745	13.5	12.48
					1	99						1	0			13.5	12.48

Conducted Power_Laptop			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	16.92
	6	2437	16.99
	11	2462	16.97
	12	2467	16.95
	13	2472	16.94
802.11g	1	2412	16.94
	6	2437	16.84
	11	2462	16.92
	12	2467	16.88
	13	2472	16.94
802.11n HT20	1	2412	16.86
	6	2437	16.87
	11	2462	16.89
	12	2467	16.86
	13	2472	16.93
802.11n HT40	3	2422	16.89
	6	2437	16.93
	9	2452	16.94
	10	2457	16.86
	11	2462	16.94
802.11ac VHT20	1	2412	16.93
	6	2437	16.94
	11	2462	16.94
	12	2467	16.93
	13	2472	16.84
802.11ac VHT40	3	2422	16.86
	6	2437	16.84
	9	2452	16.87
	10	2457	16.92
	11	2462	16.92
802.11ax HE20	1	2412	16.94
	6	2437	16.84
	11	2462	16.92
	12	2467	16.89
	13	2472	16.89
802.11ax HE40	3	2422	16.92
	6	2437	16.88
	9	2452	16.84
	10	2457	16.84
	11	2462	16.91

Conducted Power_Laptop			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	16.95
	6	2437	16.99
	11	2462	16.97
	12	2467	16.95
	13	2472	16.98
802.11g	1	2412	16.85
	6	2437	16.83
	11	2462	16.81
	12	2467	16.95
	13	2472	16.94
802.11n HT20	1	2412	16.83
	6	2437	16.87
	11	2462	16.95
	12	2467	16.81
	13	2472	16.88
802.11n HT40	3	2422	16.83
	6	2437	16.88
	9	2452	16.89
	10	2457	16.86
	11	2462	16.84
802.11ac VHT20	1	2412	16.91
	6	2437	16.83
	11	2462	16.87
	12	2467	16.85
	13	2472	16.91
802.11ac VHT40	3	2422	16.87
	6	2437	16.81
	9	2452	16.84
	10	2457	16.81
	11	2462	16.87
802.11ax HE20	1	2412	16.91
	6	2437	16.9
	11	2462	16.87
	12	2467	16.82
	13	2472	16.87
802.11ax HE40	3	2422	16.83
	6	2437	16.82
	9	2452	16.87
	10	2457	16.86
	11	2462	16.88

Conducted Power_Laptop					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11g	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11n HT20	1	2412	13.82	13.79	16.82
	6	2437	13.87	13.84	16.87
	11	2462	13.88	13.86	16.88
	12	2467	13.88	13.85	16.88
	13	2472	13.87	13.86	16.88
802.11n HT40	3	2422	13.95	13.93	16.95
	6	2437	13.99	13.96	16.99
	9	2452	13.97	13.94	16.97
	10	2457	13.95	13.89	16.93
	11	2462	13.96	13.94	16.96
802.11ac VHT20	1	2412	13.85	13.82	16.85
	6	2437	13.83	13.8	16.83
	11	2462	13.91	13.88	16.91
	12	2467	13.82	13.8	16.82
	13	2472	13.85	13.82	16.85
802.11ac VHT40	3	2422	13.83	13.8	16.83
	6	2437	13.86	13.83	16.86
	9	2452	13.88	13.86	16.88
	10	2457	13.89	13.86	16.89
	11	2462	13.87	13.86	16.88
802.11ax HE20	1	2412	13.83	13.8	16.83
	6	2437	13.87	13.84	16.87
	11	2462	13.89	13.86	16.89
	12	2467	13.89	13.86	16.89
	13	2472	13.82	13.79	16.82
802.11ax HE40	3	2422	13.88	13.85	16.88
	6	2437	13.85	13.84	16.86
	9	2452	13.88	13.85	16.88
	10	2457	13.91	13.88	16.91
	11	2462	13.88	13.85	16.88

Conducted Power_Laptop			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	9.79
	39	2441	10.23
	78	2480	10.35
LE	0	2402	9.25
	19	2440	9.57
	39	2480	9.99

Conducted Power_Laptop			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	12.86
	40	5200	12.91
	44	5220	12.94
	48	5240	12.84
802.11n HT20	36	5180	12.94
	40	5200	12.88
	44	5220	12.87
	48	5240	12.93
802.11n HT40	38	5190	12.92
	46	5230	12.86
802.11ac VHT20	36	5180	12.93
	40	5200	12.85
	44	5220	12.87
	48	5240	12.93
802.11ac VHT40	38	5190	12.92
	46	5230	12.93
802.11ac VHT80	42	5210	12.95
802.11ax HE20	36	5180	12.91
	40	5200	12.93
	44	5220	12.92
	48	5240	12.85
802.11ax HE40	38	5190	12.92
	46	5230	12.93
802.11ax HE80	42	5210	12.94

Conducted Power_Laptop			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	12.81
	40	5200	12.89
	44	5220	12.88
	48	5240	12.84
802.11n HT20	36	5180	12.88
	40	5200	12.87
	44	5220	12.91
	48	5240	12.87
802.11n HT40	38	5190	12.89
	46	5230	12.9
802.11ac VHT20	36	5180	12.85
	40	5200	12.89
	44	5220	12.83
	48	5240	12.82
802.11ac VHT40	38	5190	12.82
	46	5230	12.84
802.11ac VHT80	42	5210	12.95
802.11ax HE20	36	5180	12.82
	40	5200	12.91
	44	5220	12.92
	48	5240	12.81
802.11ax HE40	38	5190	12.89
	46	5230	12.84
802.11ax HE80	42	5210	12.91

Conducted Power_Laptop					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180			
	40	5200			
	44	5220			
	48	5240			
802.11n HT20	36	5180	12.74	12.87	15.82
	40	5200	12.76	12.91	15.85
	44	5220	12.75	12.82	15.8
	48	5240	12.73	12.91	15.83
802.11n HT40	38	5190	12.77	12.86	15.83
	46	5230	12.72	12.81	15.78
802.11ac VHT20	36	5180	12.77	12.81	15.8
	40	5200	12.74	12.89	15.83
	44	5220	12.78	12.81	15.81
	48	5240	12.72	12.84	15.79
802.11ac VHT40	38	5190	12.76	12.81	15.8
	46	5230	12.79	12.82	15.82
802.11ac VHT80	42	5210	12.81	12.96	15.9
802.11ax HE20	36	5180	12.74	12.87	15.82
	40	5200	12.76	12.84	15.81
	44	5220	12.75	12.88	15.83
	48	5240	12.76	12.91	15.85
802.11ax HE40	38	5190	12.78	12.83	15.82
	46	5230	12.75	12.91	15.84
802.11ax HE80	42	5210	12.72	12.89	15.82

Conducted Power_Laptop			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	12.93
	56	5280	12.84
	60	5300	12.91
	64	5320	12.94
802.11n HT20	52	5260	12.84
	56	5280	12.92
	60	5300	12.88
	64	5320	12.84
802.11n HT40	54	5270	12.92
	62	5310	12.86
802.11ac VHT20	52	5260	12.94
	56	5280	12.84
	60	5300	12.88
	64	5320	12.94
802.11ac VHT40	54	5270	12.85
	62	5310	12.89
802.11ac VHT80	58	5290	12.87
802.11ac VHT160	50	5250	12.98
802.11ax HE20	52	5260	12.91
	56	5280	12.85
	60	5300	12.93
	64	5320	12.92
802.11ax HE40	54	5270	12.89
	62	5310	12.93
802.11ax HE80	58	5290	12.85
802.11ax HE160	50	5250	12.91

Conducted Power_Laptop			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	12.82
	56	5280	12.87
	60	5300	12.87
	64	5320	12.82
802.11n HT20	52	5260	12.84
	56	5280	12.91
	60	5300	12.86
	64	5320	12.87
802.11n HT40	54	5270	12.85
	62	5310	12.84
802.11ac VHT20	52	5260	12.88
	56	5280	12.82
	60	5300	12.91
	64	5320	12.81
802.11ac VHT40	54	5270	12.86
	62	5310	12.81
802.11ac VHT80	58	5290	12.88
802.11ac VHT160	50	5250	12.98
802.11ax HE20	52	5260	12.87
	56	5280	12.83
	60	5300	12.88
	64	5320	12.81
802.11ax HE40	54	5270	12.87
	62	5310	12.81
802.11ax HE80	58	5290	12.82
802.11ax HE160	50	5250	12.85

Conducted Power_Laptop					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260			
	56	5280			
	60	5300			
	64	5320			
802.11n HT20	52	5260	12.86	12.88	15.88
	56	5280	12.85	12.91	15.89
	60	5300	12.81	12.82	15.83
	64	5320	12.87	12.85	15.87
802.11n HT40	54	5270	12.82	12.84	15.84
	62	5310	12.85	12.83	15.85
802.11ac VHT20	52	5260	12.82	12.85	15.85
	56	5280	12.82	12.83	15.84
	60	5300	12.84	12.92	15.89
	64	5320	12.81	12.9	15.87
802.11ac VHT40	54	5270	12.89	12.85	15.88
	62	5310	12.9	12.92	15.92
802.11ac VHT80	58	5290	12.86	12.86	15.87
802.11ac VHT160	50	5250	12.94	12.99	15.98
802.11ax HE20	52	5260	12.87	12.92	15.91
	56	5280	12.89	12.91	15.91
	60	5300	12.87	12.82	15.86
	64	5320	12.82	12.88	15.86
802.11ax HE40	54	5270	12.9	12.91	15.92
	62	5310	12.91	12.86	15.9
802.11ax HE80	58	5290	12.88	12.84	15.87
802.11ax HE160	50	5250	12.87	12.85	15.87

Conducted Power_Laptop			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	12.94
	116	5580	12.87
	120	5600	12.86
	124	5620	12.94
	132	5660	12.87
	140	5700	12.92
	144	5720	12.86
802.11n HT20	100	5500	12.84
	116	5580	12.94
	120	5600	12.89
	124	5620	12.92
	132	5660	12.86
	140	5700	12.89
	144	5720	12.93
802.11n HT40	102	5510	12.89
	110	5550	12.93
	118	5590	12.92
	126	5630	12.85
	134	5670	12.89
	142	5710	12.93
802.11ac VHT20	100	5500	12.91
	116	5580	12.92
	120	5600	12.88
	124	5620	12.89
	132	5660	12.88
	140	5700	12.94
	144	5720	12.87
802.11ac VHT40	102	5510	12.89
	110	5550	12.85
	118	5590	12.88
	126	5630	12.87
	134	5670	12.92
	142	5710	12.86
802.11ac VHT80	106	5530	12.99
	122	5610	12.94
	138	5690	12.97
802.11ac VHT160	114	5570	12.98
802.11ax HE20	100	5500	12.84
	116	5580	12.9
	120	5600	12.93
	124	5620	12.91
	132	5660	12.88
	140	5700	12.84
	144	5720	12.87
802.11ax HE40	102	5510	12.93
	110	5550	12.87
	118	5590	12.84
	126	5630	12.94
	134	5670	12.91
	142	5710	12.91
802.11ax HE80	106	5530	12.85
	122	5610	12.92
	138	5690	12.88
802.11ax HE160	114	5570	12.93

Conducted Power_Laptop			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	12.89
	116	5580	12.82
	120	5600	12.92
	124	5620	12.85
	132	5660	12.89
	140	5700	12.85
	144	5720	12.86
802.11n HT20	100	5500	12.82
	116	5580	12.91
	120	5600	12.82
	124	5620	12.91
	132	5660	12.85
	140	5700	12.83
	144	5720	12.91
802.11n HT40	102	5510	12.88
	110	5550	12.88
	118	5590	12.88
	126	5630	12.84
	134	5670	12.86
	142	5710	12.84
802.11ac VHT20	100	5500	12.87
	116	5580	12.83
	120	5600	12.91
	124	5620	12.89
	132	5660	12.86
	140	5700	12.87
	144	5720	12.85
802.11ac VHT40	102	5510	12.89
	110	5550	12.85
	118	5590	12.83
	126	5630	12.86
	134	5670	12.89
	142	5710	12.81
802.11ac VHT80	106	5530	12.98
	122	5610	12.93
	138	5690	12.96
802.11ac VHT160	114	5570	12.97
802.11ax HE20	100	5500	12.91
	116	5580	12.88
	120	5600	12.87
	124	5620	12.82
	132	5660	12.87
	140	5700	12.85
	144	5720	12.88
802.11ax HE40	102	5510	12.83
	110	5550	12.92
	118	5590	12.85
	126	5630	12.82
	134	5670	12.82
802.11ax HE80	142	5710	12.83
	106	5530	12.86
	122	5610	12.83
802.11ax HE160	138	5690	12.84
	114	5570	12.92

Conducted Power_Laptop					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500			
	116	5580			
	120	5600			
	124	5620			
	132	5660			
	140	5700			
	144	5720			
802.11n HT20	100	5500	12.82	12.9	15.87
	116	5580	12.83	12.83	15.84
	120	5600	12.84	12.88	15.87
	124	5620	12.87	12.89	15.89
	132	5660	12.87	12.8	15.85
	140	5700	12.91	12.84	15.89
	144	5720	12.89	12.9	15.91
802.11n HT40	102	5510	12.9	12.9	15.91
	110	5550	12.86	12.87	15.88
	118	5590	12.84	12.83	15.85
	126	5630	12.82	12.81	15.83
	134	5670	12.91	12.87	15.9
	142	5710	12.88	12.86	15.88
802.11ac VHT20	100	5500	12.82	12.88	15.86
	116	5580	12.85	12.83	15.85
	120	5600	12.83	12.86	15.86
	124	5620	12.89	12.9	15.91
	132	5660	12.83	12.84	15.85
	140	5700	12.88	12.89	15.9
	144	5720	12.83	12.89	15.87
802.11ac VHT40	102	5510	12.91	12.84	15.89
	110	5550	12.84	12.85	15.86
	118	5590	12.84	12.86	15.86
	126	5630	12.87	12.88	15.89
	134	5670	12.89	12.8	15.86
	142	5710	12.87	12.85	15.87
802.11ac VHT80	106	5530	12.98	12.96	15.98
	122	5610	12.96	12.91	15.95
	138	5690	12.97	12.94	15.97
802.11ac VHT160	114	5570	12.96	12.87	15.93
802.11ax HE20	100	5500	12.91	12.87	15.9
	116	5580	12.85	12.8	15.84
	120	5600	12.85	12.84	15.86
	124	5620	12.91	12.85	15.89
	132	5660	12.9	12.84	15.88
	140	5700	12.9	12.81	15.87
	144	5720	12.82	12.83	15.84
802.11ax HE40	102	5510	12.88	12.81	15.86
	110	5550	12.83	12.88	15.87
	118	5590	12.84	12.88	15.87
	126	5630	12.91	12.85	15.89
	134	5670	12.87	12.86	15.88
802.11ax HE80	142	5710	12.91	12.85	15.89
	106	5530	12.85	12.86	15.87
	122	5610	12.82	12.81	15.83
802.11ax HE160	138	5690	12.86	12.89	15.89
	114	5570	12.85	12.88	15.88

Conducted Power_Laptop			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	12.37
	153	5765	12.43
	157	5785	12.43
	161	5805	12.42
	165	5825	12.34
802.11n HT20	149	5745	12.43
	153	5765	12.44
	157	5785	12.34
	161	5805	12.41
	165	5825	12.39
802.11n HT40	151	5755	12.34
	159	5795	12.43
802.11ac VHT20	149	5745	12.43
	153	5765	12.36
	157	5785	12.37
	161	5805	12.42
	165	5825	12.39
802.11ac VHT40	151	5755	12.35
	159	5795	12.36
802.11ac VHT80	155	5775	12.49
802.11ax HE20	149	5745	12.36
	153	5765	12.35
	157	5785	12.37
	161	5805	12.42
	165	5825	12.38
802.11ax HE40	151	5755	12.37
	159	5795	12.38
802.11ax HE80	155	5775	12.34

Conducted Power_Laptop			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	12.35
	153	5765	12.38
	157	5785	12.4
	161	5805	12.31
	165	5825	12.32
802.11n HT20	149	5745	12.34
	153	5765	12.35
	157	5785	12.4
	161	5805	12.41
	165	5825	12.41
802.11n HT40	151	5755	12.34
	159	5795	12.32
802.11ac VHT20	149	5745	12.37
	153	5765	12.36
	157	5785	12.39
	161	5805	12.32
	165	5825	12.4
802.11ac VHT40	151	5755	12.38
	159	5795	12.35
802.11ac VHT80	155	5775	12.43
802.11ax HE20	149	5745	12.39
	153	5765	12.37
	157	5785	12.31
	161	5805	12.31
	165	5825	12.39
802.11ax HE40	151	5755	12.31
	159	5795	12.32
802.11ax HE80	155	5775	12.38

Conducted Power_Laptop					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745			
	153	5765			
	157	5785			
	161	5805			
	165	5825			
802.11n HT20	149	5745	12.27	12.38	15.34
	153	5765	12.31	12.36	15.35
	157	5785	12.24	12.32	15.29
	161	5805	12.32	12.37	15.36
	165	5825	12.31	12.4	15.37
802.11n HT40	151	5755	12.25	12.3	15.29
	159	5795	12.27	12.37	15.33
802.11ac VHT20	149	5745	12.27	12.33	15.31
	153	5765	12.28	12.37	15.34
	157	5785	12.3	12.39	15.36
	161	5805	12.32	12.34	15.34
	165	5825	12.23	12.4	15.33
802.11ac VHT40	151	5755	12.28	12.33	15.32
	159	5795	12.24	12.3	15.28
802.11ac VHT80	155	5775	12.36	12.45	15.42
802.11ax HE20	149	5745	12.32	12.34	15.34
	153	5765	12.3	12.32	15.32
	157	5785	12.28	12.32	15.31
	161	5805	12.32	12.34	15.34
	165	5825	12.31	12.31	15.32
802.11ax HE40	151	5755	12.28	12.33	15.32
	159	5795	12.23	12.36	15.31
802.11ax HE80	155	5775	12.23	12.33	15.29

Conducted Power_Laptop			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	1	5955	11.36
	5	5975	11.37
	9	5995	11.41
	13	6015	11.42
	17	6035	11.36
	21	6055	11.43
	25	6075	11.39
	29	6095	11.42
	33	6115	11.36
	37	6135	11.35
	41	6155	11.38
	45	6175	11.36
	49	6195	11.44
	53	6215	11.38
	57	6235	11.43
	61	6255	11.43
	65	6275	11.35
	69	6295	11.41
	73	6315	11.35
	77	6335	11.36
	81	6355	11.42
	85	6375	11.42
	89	6395	11.36
	93	6415	11.43
802.11ax HE40	3	5965	11.37
	11	6005	11.36
	19	6045	11.34
	27	6085	11.44
	35	6125	11.35
	43	6165	11.39
	51	6205	11.42
	59	6245	11.36
	67	6285	11.37
	75	6325	11.38
	83	6365	11.41
	91	6405	11.43
802.11ax HE80	7	5985	11.37
	23	6065	11.44
	39	6145	11.37
	55	6225	11.43
	71	6305	11.36
	87	6385	11.44
802.11ax HE160	15	6025	11.46
	47	6185	11.47
	79	6345	11.44

Conducted Power_Laptop			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	1	5955	13.35
	5	5975	13.41
	9	5995	13.33
	13	6015	13.32
	17	6035	13.42
	21	6055	13.39
	25	6075	13.45
	29	6095	13.33
	33	6115	13.36
	37	6135	13.41
	41	6155	13.37
	45	6175	13.38
	49	6195	13.33
	53	6215	13.35
	57	6235	13.43
	61	6255	13.33
	65	6275	13.36
	69	6295	13.38
	73	6315	13.36
	77	6335	13.39
	81	6355	13.32
	85	6375	13.34
	89	6395	13.39
	93	6415	13.37
802.11ax HE40	3	5965	13.35
	11	6005	13.34
	19	6045	13.36
	27	6085	13.33
	35	6125	13.45
	43	6165	13.41
	51	6205	13.36
	59	6245	13.41
	67	6285	13.41
	75	6325	13.31
	83	6365	13.37
	91	6405	13.39
802.11ax HE80	7	5985	13.42
	23	6065	13.32
	39	6145	13.36
	55	6225	13.34
	71	6305	13.32
	87	6385	13.35
802.11ax HE160	15	6025	13.46
	47	6185	13.49
	79	6345	13.44

Conducted Power_Laptop					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	1	5955	10.36	10.31	13.35
	5	5975	10.36	10.33	13.36
	9	5995	10.39	10.37	13.39
	13	6015	10.36	10.4	13.39
	17	6035	10.31	10.4	13.37
	21	6055	10.34	10.34	13.35
	25	6075	10.33	10.3	13.33
	29	6095	10.35	10.35	13.36
	33	6115	10.35	10.33	13.35
	37	6135	10.38	10.36	13.38
	41	6155	10.32	10.3	13.32
	45	6175	10.33	10.32	13.34
	49	6195	10.35	10.37	13.37
	53	6215	10.38	10.4	13.4
	57	6235	10.36	10.39	13.39
	61	6255	10.39	10.36	13.39
	65	6275	10.37	10.38	13.39
	69	6295	10.33	10.39	13.37
	73	6315	10.33	10.31	13.33
	77	6335	10.31	10.3	13.32
	81	6355	10.31	10.35	13.34
	85	6375	10.4	10.37	13.4
	89	6395	10.31	10.35	13.34
	93	6415	10.34	10.3	13.33
802.11ax HE40	3	5965	10.32	10.35	13.35
	11	6005	10.3	10.39	13.36
	19	6045	10.4	10.39	13.41
	27	6085	10.4	10.34	13.38
	35	6125	10.37	10.31	13.35
	43	6165	10.34	10.36	13.36
	51	6205	10.39	10.39	13.4
	59	6245	10.36	10.38	13.38
	67	6285	10.39	10.33	13.37
	75	6325	10.3	10.4	13.36
	83	6365	10.32	10.36	13.35
	91	6405	10.39	10.33	13.37
802.11ax HE80	7	5985	10.3	10.35	13.34
	23	6065	10.38	10.37	13.39
	39	6145	10.36	10.37	13.38
	55	6225	10.33	10.39	13.37
	71	6305	10.38	10.36	13.38
	87	6385	10.3	10.39	13.36
802.11ax HE160	15	6025	10.41	10.48	13.46
	47	6185	10.48	10.44	13.47
	79	6345	10.46	10.41	13.45

Conducted Power_Laptop			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	97	6435	10.42
	101	6455	10.37
	105	6475	10.34
	109	6495	10.35
	113	6515	10.41
	117	6535	10.44
802.11ax HE40	99	6445	10.39
	107	6485	10.34
	115	6525	10.42
802.11ax HE80	103	6465	10.34
	119	6545	10.39
802.11ax HE160	111	6505	10.46

Conducted Power_Laptop			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	97	6435	12.32
	101	6455	12.34
	105	6475	12.37
	109	6495	12.32
	113	6515	12.35
	117	6535	12.31
802.11ax HE40	99	6445	12.4
	107	6485	12.35
	115	6525	12.35
802.11ax HE80	103	6465	12.37
	119	6545	12.39
802.11ax HE160	111	6505	12.48

Conducted Power_Laptop					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	97	6435	9.41	9.36	12.4
	101	6455	9.41	9.35	12.39
	105	6475	9.36	9.4	12.39
	109	6495	9.4	9.3	12.36
	113	6515	9.42	9.39	12.42
	117	6535	9.34	9.38	12.37
802.11ax HE40	99	6445	9.39	9.35	12.38
	107	6485	9.33	9.35	12.35
	115	6525	9.34	9.37	12.37
802.11ax HE80	103	6465	9.41	9.4	12.42
	119	6545	9.33	9.4	12.38
802.11ax HE160	111	6505	9.49	9.44	12.48

Conducted Power_Laptop			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	121	6555	10.37
	125	6575	10.42
	129	6595	10.38
	133	6615	10.39
	137	6635	10.4
	141	6655	10.44
	145	6675	10.39
	149	6695	10.37
	153	6715	10.34
	157	6735	10.42
	161	6755	10.42
	165	6775	10.38
	169	6795	10.39
	173	6815	10.37
	177	6835	10.37
	181	6855	10.38
	185	6875	10.36
802.11ax HE40	123	6565	10.34
	131	6605	10.44
	139	6645	10.41
	147	6685	10.34
	155	6725	10.41
	163	6765	10.35
	171	6805	10.38
	179	6845	10.35
802.11ax HE80	187	6885	10.34
	135	6625	10.34
	151	6705	10.38
	167	6785	10.4
802.11ax HE160	183	6865	10.34
	143	6665	10.48
	175	6825	10.46

Conducted Power_Laptop			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	121	6555	12.33
	125	6575	12.41
	129	6595	12.32
	133	6615	12.32
	137	6635	12.38
	141	6655	12.36
	145	6675	12.41
	149	6695	12.4
	153	6715	12.34
	157	6735	12.34
	161	6755	12.33
	165	6775	12.33
	169	6795	12.32
	173	6815	12.31
	177	6835	12.32
	181	6855	12.35
	185	6875	12.34
802.11ax HE40	123	6565	12.35
	131	6605	12.36
	139	6645	12.36
	147	6685	12.32
	155	6725	12.35
	163	6765	12.35
	171	6805	12.41
	179	6845	12.31
802.11ax HE80	187	6885	12.39
	135	6625	12.36
	151	6705	12.38
	167	6785	12.33
802.11ax HE160	183	6865	12.32
	143	6665	12.48
	175	6825	12.42

Conducted Power_Laptop					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	121	6555	9.32	9.33	12.34
	125	6575	9.34	9.25	12.31
	129	6595	9.36	9.28	12.33
	133	6615	9.37	9.31	12.35
	137	6635	9.42	9.33	12.39
	141	6655	9.4	9.26	12.34
	145	6675	9.35	9.25	12.31
	149	6695	9.32	9.26	12.3
	153	6715	9.33	9.27	12.31
	157	6735	9.4	9.34	12.38
	161	6755	9.36	9.35	12.37
	165	6775	9.37	9.28	12.34
	169	6795	9.42	9.34	12.39
	173	6815	9.34	9.33	12.35
	177	6835	9.39	9.31	12.36
	181	6855	9.36	9.34	12.36
	185	6875	9.32	9.35	12.35
802.11ax HE40	123	6565	9.39	9.25	12.33
	131	6605	9.39	9.32	12.37
	139	6645	9.42	9.33	12.39
	147	6685	9.36	9.25	12.32
	155	6725	9.35	9.27	12.32
	163	6765	9.39	9.34	12.38
	171	6805	9.34	9.38	12.37
	179	6845	9.36	9.31	12.35
802.11ax HE80	187	6885	9.36	9.33	12.36
	135	6625	9.42	9.34	12.39
	151	6705	9.35	9.34	12.36
	167	6785	9.4	9.37	12.4
802.11ax HE160	183	6865	9.38	9.28	12.34
	143	6665	9.49	9.42	12.47
	175	6825	9.44	9.38	12.42

Conducted Power_Laptop			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	189	6895	9.89
	193	6915	9.84
	197	6935	9.85
	201	6955	9.88
	205	6975	9.91
	209	6995	9.93
	213	7015	9.93
	217	7035	9.92
	221	7055	9.86
	225	7075	9.91
	229	7095	9.88
	233	7115	9.91
802.11ax HE40	195	6925	9.89
	203	6965	9.87
	211	7005	9.84
	219	7045	9.91
	227	7085	9.88
802.11ax HE80	199	6945	9.84
	215	7025	9.92
802.11ax HE160	207	6985	9.94

Conducted Power_Laptop			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	189	6895	13.32
	193	6915	13.35
	197	6935	13.41
	201	6955	13.41
	205	6975	13.39
	209	6995	13.33
	213	7015	13.33
	217	7035	13.41
	221	7055	13.35
	225	7075	13.33
	229	7095	13.37
	233	7115	13.31
802.11ax HE40	195	6925	13.31
	203	6965	13.34
	211	7005	13.38
	219	7045	13.39
	227	7085	13.39
802.11ax HE80	199	6945	13.31
	215	7025	13.33
802.11ax HE160	207	6985	13.44

Conducted Power_Laptop					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	189	6895	9.82	9.85	12.85
	193	6915	9.92	9.83	12.89
	197	6935	9.92	9.87	12.91
	201	6955	9.87	9.88	12.89
	205	6975	9.9	9.89	12.91
	209	6995	9.92	9.84	12.89
	213	7015	9.83	9.91	12.88
	217	7035	9.85	9.88	12.88
	221	7055	9.84	9.92	12.89
	225	7075	9.92	9.84	12.89
	229	7095	9.84	9.83	12.85
	233	7115	9.83	9.88	12.87
802.11ax HE40	195	6925	9.85	9.91	12.89
	203	6965	9.91	9.9	12.92
	211	7005	9.83	9.84	12.85
	219	7045	9.82	9.9	12.87
	227	7085	9.89	9.92	12.92
802.11ax HE80	199	6945	9.83	9.92	12.89
	215	7025	9.84	9.86	12.86
802.11ax HE160	207	6985	9.95	9.94	12.96

Conducted Power_Tablet			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	18.42
	6	2437	18.49
	11	2462	18.46
	12	2467	18.48
	13	2472	18.46
802.11g	1	2412	18.41
	6	2437	18.32
	11	2462	18.37
	12	2467	18.4
	13	2472	18.42
802.11n HT20	1	2412	18.33
	6	2437	18.34
	11	2462	18.42
	12	2467	18.38
	13	2472	18.41
802.11n HT40	3	2422	18.34
	6	2437	18.36
	9	2452	18.34
	10	2457	18.35
	11	2462	18.34
802.11ac VHT20	1	2412	18.35
	6	2437	18.35
	11	2462	18.34
	12	2467	18.39
	13	2472	18.35
802.11ac VHT40	3	2422	18.34
	6	2437	18.32
	9	2452	18.39
	10	2457	18.42
	11	2462	18.34
802.11ax HE20	1	2412	18.39
	6	2437	18.34
	11	2462	18.41
	12	2467	18.39
	13	2472	18.42
802.11ax HE40	3	2422	18.38
	6	2437	18.41
	9	2452	18.35
	10	2457	18.39
	11	2462	18.41

Conducted Power_Tablet			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	18.47
	6	2437	18.49
	11	2462	18.45
	12	2467	18.46
	13	2472	18.48
802.11g	1	2412	18.42
	6	2437	18.42
	11	2462	18.37
	12	2467	18.36
	13	2472	18.32
802.11n HT20	1	2412	18.42
	6	2437	18.37
	11	2462	18.41
	12	2467	18.38
	13	2472	18.42
802.11n HT40	3	2422	18.35
	6	2437	18.32
	9	2452	18.42
	10	2457	18.39
	11	2462	18.35
802.11ac VHT20	1	2412	18.42
	6	2437	18.35
	11	2462	18.4
	12	2467	18.34
	13	2472	18.42
802.11ac VHT40	3	2422	18.35
	6	2437	18.37
	9	2452	18.42
	10	2457	18.4
	11	2462	18.36
802.11ax HE20	1	2412	18.42
	6	2437	18.32
	11	2462	18.32
	12	2467	18.34
	13	2472	18.34
802.11ax HE40	3	2422	18.32
	6	2437	18.37
	9	2452	18.33
	10	2457	18.32
	11	2462	18.42

Conducted Power_Tablet					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11g	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11n HT20	1	2412	15.32	15.38	18.36
	6	2437	15.31	15.39	18.36
	11	2462	15.36	15.33	18.36
	12	2467	15.38	15.38	18.39
	13	2472	15.38	15.34	18.37
802.11n HT40	3	2422	15.45	15.45	18.46
	6	2437	15.47	15.48	18.49
	9	2452	15.47	15.44	18.47
	10	2457	15.46	15.43	18.46
	11	2462	15.42	15.45	18.45
802.11ac VHT20	1	2412	15.39	15.36	18.39
	6	2437	15.34	15.34	18.35
	11	2462	15.38	15.34	18.37
	12	2467	15.32	15.39	18.37
	13	2472	15.39	15.32	18.37
802.11ac VHT40	3	2422	15.35	15.34	18.36
	6	2437	15.33	15.38	18.37
	9	2452	15.31	15.35	18.34
	10	2457	15.3	15.31	18.32
	11	2462	15.32	15.37	18.36
802.11ax HE20	1	2412	15.4	15.31	18.37
	6	2437	15.4	15.36	18.39
	11	2462	15.39	15.39	18.40
	12	2467	15.37	15.36	18.38
	13	2472	15.35	15.37	18.37
802.11ax HE40	3	2422	15.36	15.38	18.38
	6	2437	15.32	15.38	18.36
	9	2452	15.33	15.37	18.36
	10	2457	15.37	15.35	18.37
	11	2462	15.39	15.36	18.39

Conducted Power_Tablet			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	9.79
	39	2441	10.23
	78	2480	10.35
LE	0	2402	9.25
	19	2440	9.57
	39	2480	9.99

Conducted Power_Tablet			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	11.39
	40	5200	11.38
	44	5220	11.32
	48	5240	11.35
802.11n HT20	36	5180	11.33
	40	5200	11.36
	44	5220	11.36
	48	5240	11.38
802.11n HT40	38	5190	11.43
	46	5230	11.45
802.11ac VHT20	36	5180	11.38
	40	5200	11.38
	44	5220	11.38
	48	5240	11.37
802.11ac VHT40	38	5190	11.4
	46	5230	11.37
802.11ac VHT80	42	5210	11.48
802.11ax HE20	36	5180	11.32
	40	5200	11.36
	44	5220	11.34
	48	5240	11.35
802.11ax HE40	38	5190	11.41
	46	5230	11.35
802.11ax HE80	42	5210	11.33

Conducted Power_Tablet			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	11.41
	40	5200	11.38
	44	5220	11.42
	48	5240	11.39
802.11n HT20	36	5180	11.38
	40	5200	11.42
	44	5220	11.37
	48	5240	11.32
802.11n HT40	38	5190	11.38
	46	5230	11.38
802.11ac VHT20	36	5180	11.39
	40	5200	11.34
	44	5220	11.41
	48	5240	11.42
802.11ac VHT40	38	5190	11.35
	46	5230	11.43
802.11ac VHT80	42	5210	11.45
802.11ax HE20	36	5180	11.42
	40	5200	11.33
	44	5220	11.42
	48	5240	11.39
802.11ax HE40	38	5190	11.41
	46	5230	11.32
802.11ax HE80	42	5210	11.39

Conducted Power_Tablet					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180			
	40	5200			
	44	5220			
	48	5240			
802.11n HT20	36	5180	8.29	8.38	11.35
	40	5200	8.23	8.41	11.33
	44	5220	8.24	8.36	11.31
	48	5240	8.23	8.36	11.31
802.11n HT40	38	5190	8.31	8.32	11.33
	46	5230	8.32	8.32	11.33
802.11ac VHT20	36	5180	8.3	8.37	11.35
	40	5200	8.22	8.35	11.3
	44	5220	8.3	8.32	11.32
	48	5240	8.31	8.34	11.34
802.11ac VHT40	38	5190	8.26	8.33	11.31
	46	5230	8.26	8.39	11.34
802.11ac VHT80	42	5210	8.34	8.49	11.43
802.11ax HE20	36	5180	8.32	8.39	11.37
	40	5200	8.27	8.4	11.35
	44	5220	8.24	8.38	11.32
	48	5240	8.27	8.42	11.36
802.11ax HE40	38	5190	8.3	8.35	11.34
	46	5230	8.31	8.42	11.38
802.11ax HE80	42	5210	8.23	8.4	11.33

Conducted Power_Tablet			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	11.4
	56	5280	11.37
	60	5300	11.41
	64	5320	11.41
802.11n HT20	52	5260	11.34
	56	5280	11.34
	60	5300	11.35
	64	5320	11.32
802.11n HT40	54	5270	11.37
	62	5310	11.38
802.11ac VHT20	52	5260	11.37
	56	5280	11.32
	60	5300	11.42
	64	5320	11.32
802.11ac VHT40	54	5270	11.4
	62	5310	11.38
802.11ac VHT80	58	5290	11.34
802.11ac VHT160	50	5250	11.48
802.11ax HE20	52	5260	11.42
	56	5280	11.43
	60	5300	11.38
	64	5320	11.42
802.11ax HE40	54	5270	11.35
	62	5310	11.37
802.11ax HE80	58	5290	11.39
802.11ax HE160	50	5250	11.36

Conducted Power_Tablet			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	11.35
	56	5280	11.31
	60	5300	11.36
	64	5320	11.37
802.11n HT20	52	5260	11.31
	56	5280	11.35
	60	5300	11.31
	64	5320	11.32
802.11n HT40	54	5270	11.39
	62	5310	11.33
802.11ac VHT20	52	5260	11.41
	56	5280	11.4
	60	5300	11.36
	64	5320	11.37
802.11ac VHT40	54	5270	11.39
	62	5310	11.3
802.11ac VHT80	58	5290	11.38
802.11ac VHT160	50	5250	11.44
802.11ax HE20	52	5260	11.41
	56	5280	11.37
	60	5300	11.31
	64	5320	11.35
802.11ax HE40	54	5270	11.34
	62	5310	11.38
802.11ax HE80	58	5290	11.33
802.11ax HE160	50	5250	11.34

Conducted Power_Tablet					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260			
	56	5280			
	60	5300			
	64	5320			
802.11n HT20	52	5260	8.39	8.34	11.38
	56	5280	8.34	8.35	11.36
	60	5300	8.32	8.33	11.34
	64	5320	8.37	8.37	11.38
802.11n HT40	54	5270	8.34	8.33	11.35
	62	5310	8.41	8.34	11.39
802.11ac VHT20	52	5260	8.34	8.38	11.37
	56	5280	8.39	8.4	11.41
	60	5300	8.32	8.34	11.34
	64	5320	8.41	8.33	11.38
802.11ac VHT40	54	5270	8.36	8.34	11.36
	62	5310	8.35	8.35	11.36
802.11ac VHT80	58	5290	8.39	8.39	11.4
802.11ac VHT160	50	5250	8.48	8.47	11.49
802.11ax HE20	52	5260	8.32	8.39	11.37
	56	5280	8.36	8.38	11.38
	60	5300	8.39	8.36	11.39
	64	5320	8.34	8.33	11.35
802.11ax HE40	54	5270	8.35	8.34	11.36
	62	5310	8.4	8.41	11.42
802.11ax HE80	58	5290	8.32	8.34	11.34
802.11ax HE160	50	5250	8.44	8.46	11.46

Conducted Power_Tablet			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	11.33
	116	5580	11.36
	120	5600	11.35
	124	5620	11.34
	132	5660	11.33
	140	5700	11.38
	144	5720	11.35
802.11n HT20	100	5500	11.38
	116	5580	11.39
	120	5600	11.36
	124	5620	11.36
	132	5660	11.3
	140	5700	11.3
	144	5720	11.33
802.11n HT40	102	5510	11.39
	110	5550	11.3
	118	5590	11.31
	126	5630	11.34
	134	5670	11.39
	142	5710	11.39
802.11ac VHT20	100	5500	11.3
	116	5580	11.32
	120	5600	11.36
	124	5620	11.33
	132	5660	11.32
	140	5700	11.35
802.11ac VHT40	144	5720	11.38
	102	5510	11.39
	110	5550	11.34
	118	5590	11.31
	126	5630	11.4
	134	5670	11.36
802.11ac VHT80	142	5710	11.3
	106	5530	11.47
	122	5610	11.41
802.11ac VHT160	138	5690	11.44
	114	5570	11.45
802.11ax HE20	100	5500	11.31
	116	5580	11.37
	120	5600	11.3
	124	5620	11.37
	132	5660	11.36
	140	5700	11.4
	144	5720	11.32
802.11ax HE40	102	5510	11.39
	110	5550	11.32
	118	5590	11.3
	126	5630	11.37
	134	5670	11.4
802.11ax HE80	142	5710	11.38
	106	5530	11.32
	122	5610	11.36
802.11ax HE160	138	5690	11.35
	114	5570	11.32

Conducted Power_Tablet			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	12.89
	116	5580	12.82
	120	5600	12.92
	124	5620	12.85
	132	5660	12.89
	140	5700	12.85
	144	5720	12.86
802.11n HT20	100	5500	12.82
	116	5580	12.91
	120	5600	12.82
	124	5620	12.91
	132	5660	12.85
	140	5700	12.83
	144	5720	12.91
802.11n HT40	102	5510	12.88
	110	5550	12.88
	118	5590	12.88
	126	5630	12.84
	134	5670	12.86
	142	5710	12.84
802.11ac VHT20	100	5500	12.87
	116	5580	12.83
	120	5600	12.91
	124	5620	12.89
	132	5660	12.86
	140	5700	12.87
	144	5720	12.85
802.11ac VHT40	102	5510	12.89
	110	5550	12.85
	118	5590	12.83
	126	5630	12.86
	134	5670	12.89
	142	5710	12.81
802.11ac VHT80	106	5530	12.98
	122	5610	12.93
	138	5690	12.96
802.11ac VHT160	114	5570	12.97
802.11ax HE20	100	5500	12.91
	116	5580	12.88
	120	5600	12.87
	124	5620	12.82
	132	5660	12.87
	140	5700	12.85
	144	5720	12.88
802.11ax HE40	102	5510	12.83
	110	5550	12.92
	118	5590	12.85
	126	5630	12.82
	134	5670	12.82
802.11ax HE80	142	5710	12.83
	106	5530	12.86
	122	5610	12.83
802.11ax HE160	138	5690	12.84
	114	5570	12.92

Conducted Power_Tablet					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500			
	116	5580			
	120	5600			
	124	5620			
	132	5660			
	140	5700			
	144	5720			
802.11n HT20	100	5500	11.37	11.31	14.35
	116	5580	11.33	11.38	14.37
	120	5600	11.35	11.34	14.36
	124	5620	11.36	11.39	14.39
	132	5660	11.36	11.32	14.35
	140	5700	11.33	11.36	14.36
	144	5720	11.36	11.39	14.39
802.11n HT40	102	5510	11.33	11.32	14.34
	110	5550	11.29	11.39	14.35
	118	5590	11.35	11.37	14.37
	126	5630	11.32	11.34	14.34
	134	5670	11.32	11.31	14.33
	142	5710	11.36	11.39	14.39
802.11ac VHT20	100	5500	11.31	11.37	14.35
	116	5580	11.35	11.33	14.35
	120	5600	11.35	11.31	14.34
	124	5620	11.37	11.34	14.37
	132	5660	11.32	11.37	14.36
	140	5700	11.36	11.37	14.38
	144	5720	11.32	11.45	14.4
802.11ac VHT40	102	5510	11.38	11.35	14.38
	110	5550	11.28	11.33	14.32
	118	5590	11.32	11.37	14.36
	126	5630	11.35	11.35	14.36
	134	5670	11.31	11.38	14.36
	142	5710	11.37	11.39	14.39
802.11ac VHT80	106	5530	11.48	11.49	14.5
	122	5610	11.42	11.45	14.45
	138	5690	11.38	11.47	14.44
802.11ac VHT160	114	5570	11.46	11.41	14.45
802.11ax HE20	100	5500	11.37	11.34	14.37
	116	5580	11.29	11.35	14.33
	120	5600	11.29	11.31	14.31
	124	5620	11.36	11.38	14.38
	132	5660	11.36	11.31	14.35
	140	5700	11.33	11.36	14.36
	144	5720	11.31	11.31	14.32
802.11ax HE40	102	5510	11.34	11.44	14.4
	110	5550	11.28	11.37	14.34
	118	5590	11.28	11.36	14.33
	126	5630	11.28	11.45	14.38
	134	5670	11.29	11.36	14.34
802.11ax HE80	106	5530	11.38	11.38	14.39
	122	5610	11.35	11.36	14.37
	138	5690	11.37	11.33	14.36
802.11ax HE160	114	5570	11.31	11.35	14.34

Conducted Power_Tablet			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	12.86
	153	5765	12.8
	157	5785	12.85
	161	5805	12.84
	165	5825	12.82
802.11n HT20	149	5745	12.9
	153	5765	12.82
	157	5785	12.84
	161	5805	12.84
	165	5825	12.9
802.11n HT40	151	5755	12.85
	159	5795	12.88
802.11ac VHT20	149	5745	12.87
	153	5765	12.9
	157	5785	12.88
	161	5805	12.82
	165	5825	12.81
802.11ac VHT40	151	5755	12.85
	159	5795	12.89
802.11ac VHT80	155	5775	12.98
802.11ax HE20	149	5745	12.83
	153	5765	12.8
	157	5785	12.82
	161	5805	12.9
	165	5825	12.89
802.11ax HE40	151	5755	12.81
	159	5795	12.88
802.11ax HE80	155	5775	12.86

Conducted Power_Tablet			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	12.87
	153	5765	12.83
	157	5785	12.83
	161	5805	12.9
	165	5825	12.81
802.11n HT20	149	5745	12.87
	153	5765	12.84
	157	5785	12.84
	161	5805	12.85
	165	5825	12.85
802.11n HT40	151	5755	12.88
	159	5795	12.83
802.11ac VHT20	149	5745	12.88
	153	5765	12.8
	157	5785	12.83
	161	5805	12.89
	165	5825	12.83
802.11ac VHT40	151	5755	12.81
	159	5795	12.84
802.11ac VHT80	155	5775	12.95
802.11ax HE20	149	5745	12.87
	153	5765	12.8
	157	5785	12.82
	161	5805	12.82
	165	5825	12.89
802.11ax HE40	151	5755	12.84
	159	5795	12.82
802.11ax HE80	155	5775	12.89

Conducted Power_Tablet					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745			
	153	5765			
	157	5785			
	161	5805			
	165	5825			
802.11n HT20	149	5745	12.93	12.84	15.9
	153	5765	12.92	12.86	15.9
	157	5785	12.91	12.88	15.91
	161	5805	12.84	12.83	15.85
	165	5825	12.91	12.84	15.89
802.11n HT40	151	5755	12.84	12.87	15.87
	159	5795	12.87	12.84	15.87
802.11ac VHT20	149	5745	12.88	12.8	15.85
	153	5765	12.84	12.9	15.88
	157	5785	12.92	12.88	15.91
	161	5805	12.93	12.82	15.89
	165	5825	12.83	12.86	15.86
802.11ac VHT40	151	5755	12.86	12.9	15.89
	159	5795	12.88	12.82	15.86
802.11ac VHT80	155	5775	12.98	12.92	15.96
802.11ax HE20	149	5745	12.88	12.9	15.9
	153	5765	12.88	12.89	15.9
	157	5785	12.86	12.86	15.87
	161	5805	12.88	12.81	15.86
	165	5825	12.89	12.8	15.86
802.11ax HE40	151	5755	12.92	12.85	15.9
	159	5795	12.86	12.86	15.87
802.11ax HE80	155	5775	12.89	12.87	15.89

Conducted Power_Tablet			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	1	5955	13.36
	5	5975	13.37
	9	5995	13.41
	13	6015	13.42
	17	6035	13.36
	21	6055	13.43
	25	6075	13.39
	29	6095	13.42
	33	6115	13.36
	37	6135	13.35
	41	6155	13.38
	45	6175	13.36
	49	6195	13.44
	53	6215	13.38
	57	6235	13.43
	61	6255	13.43
	65	6275	13.35
	69	6295	13.41
	73	6315	13.35
	77	6335	13.36
	81	6355	13.42
	85	6375	13.42
	89	6395	13.36
	93	6415	13.43
802.11ax HE40	3	5965	13.37
	11	6005	13.36
	19	6045	13.34
	27	6085	13.44
	35	6125	13.35
	43	6165	13.39
	51	6205	13.42
	59	6245	13.36
	67	6285	13.37
	75	6325	13.38
	83	6365	13.41
	91	6405	13.43
802.11ax HE80	7	5985	13.37
	23	6065	13.44
	39	6145	13.37
	55	6225	13.43
	71	6305	13.36
	87	6385	13.44
802.11ax HE160	15	6025	13.46
	47	6185	13.48
	79	6345	13.44

Conducted Power_Tablet			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	1	5955	13.35
	5	5975	13.41
	9	5995	13.33
	13	6015	13.32
	17	6035	13.42
	21	6055	13.39
	25	6075	13.45
	29	6095	13.33
	33	6115	13.36
	37	6135	13.41
	41	6155	13.37
	45	6175	13.38
	49	6195	13.33
	53	6215	13.35
	57	6235	13.43
	61	6255	13.33
	65	6275	13.36
	69	6295	13.38
	73	6315	13.36
	77	6335	13.39
	81	6355	13.32
	85	6375	13.34
	89	6395	13.39
	93	6415	13.37
802.11ax HE40	3	5965	13.35
	11	6005	13.34
	19	6045	13.36
	27	6085	13.33
	35	6125	13.45
	43	6165	13.41
	51	6205	13.36
	59	6245	13.41
	67	6285	13.41
	75	6325	13.31
	83	6365	13.37
	91	6405	13.39
802.11ax HE80	7	5985	13.42
	23	6065	13.32
	39	6145	13.36
	55	6225	13.34
	71	6305	13.32
	87	6385	13.35
802.11ax HE160	15	6025	13.46
	47	6185	13.49
	79	6345	13.44

Conducted Power_Tablet					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	1	5955	10.36	10.31	13.35
	5	5975	10.36	10.33	13.36
	9	5995	10.39	10.37	13.39
	13	6015	10.36	10.4	13.39
	17	6035	10.31	10.4	13.37
	21	6055	10.34	10.34	13.35
	25	6075	10.33	10.3	13.33
	29	6095	10.35	10.35	13.36
	33	6115	10.35	10.33	13.35
	37	6135	10.38	10.36	13.38
	41	6155	10.32	10.3	13.32
	45	6175	10.33	10.32	13.34
	49	6195	10.35	10.37	13.37
	53	6215	10.38	10.4	13.4
	57	6235	10.36	10.39	13.39
	61	6255	10.39	10.36	13.39
	65	6275	10.37	10.38	13.39
	69	6295	10.33	10.39	13.37
	73	6315	10.33	10.31	13.33
	77	6335	10.31	10.3	13.32
	81	6355	10.31	10.35	13.34
	85	6375	10.4	10.37	13.4
	89	6395	10.31	10.35	13.34
	93	6415	10.34	10.3	13.33
802.11ax HE40	3	5965	10.32	10.35	13.35
	11	6005	10.3	10.39	13.36
	19	6045	10.4	10.39	13.41
	27	6085	10.4	10.34	13.38
	35	6125	10.37	10.31	13.35
	43	6165	10.34	10.36	13.36
	51	6205	10.39	10.39	13.4
	59	6245	10.36	10.38	13.38
	67	6285	10.39	10.33	13.37
	75	6325	10.3	10.4	13.36
	83	6365	10.32	10.36	13.35
	91	6405	10.39	10.33	13.37
802.11ax HE80	7	5985	10.3	10.35	13.34
	23	6065	10.38	10.37	13.39
	39	6145	10.36	10.37	13.38
	55	6225	10.33	10.39	13.37
	71	6305	10.38	10.36	13.38
	87	6385	10.3	10.39	13.36
802.11ax HE160	15	6025	10.41	10.48	13.46
	47	6185	10.48	10.46	13.48
	79	6345	10.46	10.41	13.45

Conducted Power_Tablet			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	97	6435	13.33
	101	6455	13.39
	105	6475	13.35
	109	6495	13.34
	113	6515	13.4
	117	6535	13.31
802.11ax HE40	99	6445	13.38
	107	6485	13.37
	115	6525	13.36
802.11ax HE80	103	6465	13.33
	119	6545	13.34
802.11ax HE160	111	6505	13.47

Conducted Power_Tablet			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	97	6435	13.31
	101	6455	13.33
	105	6475	13.35
	109	6495	13.31
	113	6515	13.31
	117	6535	13.33
802.11ax HE40	99	6445	13.35
	107	6485	13.31
	115	6525	13.34
802.11ax HE80	103	6465	13.34
	119	6545	13.36
802.11ax HE160	111	6505	13.43

Conducted Power_Tablet					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	97	6435	10.32	10.38	13.36
	101	6455	10.4	10.33	13.38
	105	6475	10.37	10.4	13.4
	109	6495	10.39	10.34	13.38
	113	6515	10.4	10.37	13.4
	117	6535	10.32	10.37	13.36
802.11ax HE40	99	6445	10.4	10.38	13.4
	107	6485	10.35	10.33	13.35
	115	6525	10.35	10.32	13.35
802.11ax HE80	103	6465	10.3	10.41	13.37
	119	6545	10.4	10.42	13.42
802.11ax HE160	111	6505	10.42	10.47	13.46

Conducted Power_Tablet			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	121	6555	13.31
	125	6575	13.39
	129	6595	13.37
	133	6615	13.38
	137	6635	13.35
	141	6655	13.35
	145	6675	13.33
	149	6695	13.4
	153	6715	13.35
	157	6735	13.34
	161	6755	13.39
	165	6775	13.38
	169	6795	13.3
	173	6815	13.31
	177	6835	13.33
	181	6855	13.37
	185	6875	13.3
802.11ax HE40	123	6565	13.38
	131	6605	13.32
	139	6645	13.37
	147	6685	13.39
	155	6725	13.34
	163	6765	13.39
	171	6805	13.33
	179	6845	13.3
802.11ax HE80	187	6885	13.38
	135	6625	13.3
	151	6705	13.36
	167	6785	13.35
802.11ax HE160	183	6865	13.3
	143	6665	13.46
	175	6825	13.44

Conducted Power_Tablet			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	121	6555	13.32
	125	6575	13.37
	129	6595	13.39
	133	6615	13.31
	137	6635	13.31
	141	6655	13.35
	145	6675	13.34
	149	6695	13.39
	153	6715	13.31
	157	6735	13.36
	161	6755	13.31
	165	6775	13.31
	169	6795	13.38
	173	6815	13.36
	177	6835	13.3
	181	6855	13.3
	185	6875	13.36
802.11ax HE40	123	6565	13.39
	131	6605	13.36
	139	6645	13.38
	147	6685	13.39
	155	6725	13.39
	163	6765	13.33
	171	6805	13.38
	179	6845	13.3
802.11ax HE80	187	6885	13.37
	135	6625	13.3
	151	6705	13.4
	167	6785	13.37
802.11ax HE160	183	6865	13.34
	143	6665	13.46
	175	6825	13.42

Conducted Power_Tablet					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	121	6555	10.35	10.31	13.34
	125	6575	10.42	10.34	13.39
	129	6595	10.41	10.32	13.38
	133	6615	10.38	10.31	13.36
	137	6635	10.39	10.31	13.36
	141	6655	10.38	10.35	13.38
	145	6675	10.37	10.41	13.4
	149	6695	10.42	10.35	13.4
	153	6715	10.39	10.36	13.39
	157	6735	10.34	10.3	13.33
	161	6755	10.32	10.34	13.34
	165	6775	10.34	10.36	13.36
	169	6795	10.32	10.39	13.37
	173	6815	10.41	10.4	13.42
	177	6835	10.34	10.38	13.37
	181	6855	10.4	10.34	13.38
	185	6875	10.33	10.39	13.37
802.11ax HE40	123	6565	10.34	10.34	13.35
	131	6605	10.37	10.4	13.4
	139	6645	10.38	10.38	13.39
	147	6685	10.35	10.35	13.36
	155	6725	10.41	10.33	13.38
	163	6765	10.42	10.39	13.42
	171	6805	10.33	10.37	13.36
	179	6845	10.39	10.33	13.37
802.11ax HE80	187	6885	10.37	10.31	13.35
	135	6625	10.41	10.34	13.39
	151	6705	10.34	10.31	13.34
	167	6785	10.33	10.34	13.35
802.11ax HE160	183	6865	10.3	10.33	13.33
	143	6665	10.47	10.45	13.47
	175	6825	10.43	10.41	13.43

Conducted Power_Tablet			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	189	6895	13.39
	193	6915	13.34
	197	6935	13.35
	201	6955	13.38
	205	6975	13.41
	209	6995	13.43
	213	7015	13.43
	217	7035	13.42
	221	7055	13.36
	225	7075	13.41
	229	7095	13.38
	233	7115	13.41
802.11ax HE40	195	6925	13.39
	203	6965	13.37
	211	7005	13.34
	219	7045	13.41
	227	7085	13.38
802.11ax HE80	199	6945	13.34
	215	7025	13.42
802.11ax HE160	207	6985	13.44

Conducted Power_Tablet			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	189	6895	13.32
	193	6915	13.35
	197	6935	13.41
	201	6955	13.41
	205	6975	13.39
	209	6995	13.33
	213	7015	13.33
	217	7035	13.41
	221	7055	13.35
	225	7075	13.33
	229	7095	13.37
	233	7115	13.31
802.11ax HE40	195	6925	13.31
	203	6965	13.34
	211	7005	13.38
	219	7045	13.39
	227	7085	13.39
802.11ax HE80	199	6945	13.31
	215	7025	13.33
802.11ax HE160	207	6985	13.44

Conducted Power_Tablet					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	189	6895	10.32	10.35	13.35
	193	6915	10.42	10.33	13.39
	197	6935	10.42	10.37	13.41
	201	6955	10.37	10.38	13.39
	205	6975	10.4	10.39	13.41
	209	6995	10.42	10.34	13.39
	213	7015	10.33	10.41	13.38
	217	7035	10.35	10.38	13.38
	221	7055	10.34	10.42	13.39
	225	7075	10.42	10.34	13.39
	229	7095	10.34	10.33	13.35
	233	7115	10.33	10.38	13.37
802.11ax HE40	195	6925	10.35	10.41	13.39
	203	6965	10.41	10.4	13.42
	211	7005	10.33	10.34	13.35
	219	7045	10.32	10.4	13.37
	227	7085	10.39	10.42	13.42
802.11ax HE80	199	6945	10.33	10.42	13.39
	215	7025	10.34	10.36	13.36
802.11ax HE160	207	6985	10.45	10.44	13.46

Appendix F. SAR and Incident Power Density Test Result

SAR Results for Body Exposure Condition.

Note:

1. SAR testing for WLAN was performed on the maximum power mode.
2. SAR testing for LTE / NR was performed on the maximum power mode.
3. The "< 0.001" means there is no SAR value or the SAR is too low to be measured.
4. Per KDB 388624 APPENDIX OVER6G, the minimum of 5 channels to perform IPD across U-NII 5,6,7 and 8. and measured results were scaled by factor 1.545 to reported power density when measurement uncertainty exceed 30%.

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WCDMA II	RMC12.2K	Bottom for Laptop	5	9538			1	Ant 0	w/o	-	1.00	24.50	23.49	1.26	0.06	0.245	0.31
	WCDMA II	RMC12.2K	Rear Face	10	9538			1	Ant 0	w/o	-	1.00	24.50	23.49	1.26	0.06	0.254	0.32
	WCDMA II	RMC12.2K	Left Side	0	9538			1	Ant 0	w/o	-	1.00	24.50	23.49	1.26	0	<0.001	0.00
	WCDMA II	RMC12.2K	Right Side	0	9538			1	Ant 0	w/o	-	1.00	24.50	23.49	1.26	0	<0.001	0.00
	WCDMA II	RMC12.2K	Top Side	0	9538			1	Ant 0	w/o	-	1.00	24.50	23.49	1.26	0	<0.001	0.00
	WCDMA II	RMC12.2K	Bottom Side	5	9538			1	Ant 0	w/o	-	1.00	24.50	23.49	1.26	-0.06	0.126	0.16
	WCDMA II	RMC12.2K	Bottom for Laptop	0	9538			1	Ant 0	w/	-	1.00	17.50	16.95	1.14	0.06	0.212	0.24
1	WCDMA II	RMC12.2K	Rear Face	0	9538			1	Ant 0	w/	-	1.00	15.50	14.92	1.14	0.08	0.352	0.40
	WCDMA II	RMC12.2K	Bottom Side	0	9538			1	Ant 0	w/	-	1.00	15.50	14.92	1.14	0.18	0.04	0.05
	WCDMA II	RMC12.2K	Rear Face	0	9262			1	Ant 0	w/	-	1.00	15.50	14.72	1.20	0.01	0.263	0.32
	WCDMA II	RMC12.2K	Rear Face	0	9400			1	Ant 0	w/	-	1.00	15.50	14.78	1.18	0.18	0.295	0.35
	WCDMA II	RMC12.2K	Rear Face	0	9538			2	Ant 0	w/	-	1.00	15.50	14.92	1.14	-0.02	0.33	0.38
	WCDMA IV	RMC12.2K	Bottom for Laptop	5	1312			1	Ant 0	w/o	-	1.00	24.50	23.48	1.26	-0.06	0.226	0.28
	WCDMA IV	RMC12.2K	Rear Face	10	1312			1	Ant 0	w/o	-	1.00	24.50	23.48	1.26	0.17	0.105	0.13
	WCDMA IV	RMC12.2K	Left Side	0	1312			1	Ant 0	w/o	-	1.00	24.50	23.48	1.26	0	<0.001	0.00
	WCDMA IV	RMC12.2K	Right Side	0	1312			1	Ant 0	w/o	-	1.00	24.50	23.48	1.26	0	<0.001	0.00
	WCDMA IV	RMC12.2K	Top Side	0	1312			1	Ant 0	w/o	-	1.00	24.50	23.48	1.26	0	<0.001	0.00
	WCDMA IV	RMC12.2K	Bottom Side	5	1312			1	Ant 0	w/o	-	1.00	24.50	23.48	1.26	-0.16	0.102	0.13
	WCDMA IV	RMC12.2K	Bottom for Laptop	0	1312			1	Ant 0	w/	-	1.00	18.50	17.98	1.13	-0.15	0.182	0.21
2	WCDMA IV	RMC12.2K	Rear Face	0	1312			1	Ant 0	w/	-	1.00	17.00	16.97	1.01	-0.03	0.288	0.29
	WCDMA IV	RMC12.2K	Bottom Side	0	1312			1	Ant 0	w/	-	1.00	17.00	16.97	1.01	0.06	0.075	0.08
	WCDMA IV	RMC12.2K	Rear Face	0	1413			1	Ant 0	w/	-	1.00	17.00	16.95	1.01	0.16	0.255	0.26
	WCDMA IV	RMC12.2K	Rear Face	0	1513			1	Ant 0	w/	-	1.00	17.00	16.85	1.04	0.16	0.268	0.28
	WCDMA IV	RMC12.2K	Rear Face	0	1312			2	Ant 0	w/	-	1.00	17.00	16.97	1.01	-0.01	0.274	0.28
	WCDMA V	RMC12.2K	Bottom for Laptop	5	4182			1	Ant 0	w/o	-	1.00	24.50	22.69	1.52	0.09	0.332	0.50
	WCDMA V	RMC12.2K	Rear Face	10	4182			1	Ant 0	w/o	-	1.00	24.50	22.69	1.52	0.13	0.198	0.30
	WCDMA V	RMC12.2K	Left Side	0	4182			1	Ant 0	w/o	-	1.00	24.50	22.69	1.52	0	<0.001	0.00
	WCDMA V	RMC12.2K	Right Side	0	4182			1	Ant 0	w/o	-	1.00	24.50	22.69	1.52	0	<0.001	0.00
	WCDMA V	RMC12.2K	Top Side	0	4182			1	Ant 0	w/o	-	1.00	24.50	22.69	1.52	0	<0.001	0.00
	WCDMA V	RMC12.2K	Bottom Side	5	4182			1	Ant 0	w/o	-	1.00	24.50	22.69	1.52	-0.11	0.264	0.40
	WCDMA V	RMC12.2K	Bottom for Laptop	0	4182			1	Ant 0	w/	-	1.00	21.00	20.47	1.13	0.04	0.453	0.51
	WCDMA V	RMC12.2K	Rear Face	0	4182			1	Ant 0	w/	-	1.00	18.50	17.69	1.21	0.15	0.373	0.45
	WCDMA V	RMC12.2K	Bottom Side	0	4182			1	Ant 0	w/	-	1.00	18.50	17.69	1.21	-0.07	0.134	0.16
3	WCDMA V	RMC12.2K	Bottom for Laptop	0	4132			1	Ant 0	w/	-	1.00	21.00	20.46	1.13	-0.17	0.476	0.54
	WCDMA V	RMC12.2K	Bottom for Laptop	0	4233			1	Ant 0	w/	-	1.00	21.00	20.43	1.14	0.05	0.437	0.50
	WCDMA V	RMC12.2K	Bottom for Laptop	0	4132			2	Ant 0	w/	-	1.00	21.00	20.46	1.13	-0.02	0.463	0.52

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 2	QPSK20M	Bottom for Laptop	5	19100	1	0	1	Ant 0	w/o	-	1.00	24.00	23.36	1.16	-0.11	0.113	0.13
	LTE 2	QPSK20M	Rear Face	10	19100	1	0	1	Ant 0	w/o	-	1.00	24.00	23.36	1.16	0.08	0.09	0.10
	LTE 2	QPSK20M	Left Side	0	19100	1	0	1	Ant 0	w/o	-	1.00	24.00	23.36	1.16	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	0	19100	1	0	1	Ant 0	w/o	-	1.00	24.00	23.36	1.16	0	<0.001	0.00
	LTE 2	QPSK20M	Top Side	0	19100	1	0	1	Ant 0	w/o	-	1.00	24.00	23.36	1.16	0	<0.001	0.00
	LTE 2	QPSK20M	Bottom Side	5	19100	1	0	1	Ant 0	w/o	-	1.00	24.00	23.36	1.16	0.14	0.042	0.05
	LTE 2	QPSK20M	Bottom for Laptop	5	19100	50	0	1	Ant 0	w/o	-	1.00	23.00	22.41	1.15	-0.04	0.084	0.10
	LTE 2	QPSK20M	Rear Face	10	19100	50	0	1	Ant 0	w/o	-	1.00	23.00	22.41	1.15	-0.03	0.075	0.09
	LTE 2	QPSK20M	Left Side	0	19100	50	0	1	Ant 0	w/o	-	1.00	23.00	22.41	1.15	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	0	19100	50	0	1	Ant 0	w/o	-	1.00	23.00	22.41	1.15	0	<0.001	0.00
	LTE 2	QPSK20M	Top Side	0	19100	50	0	1	Ant 0	w/o	-	1.00	23.00	22.41	1.15	0	<0.001	0.00
	LTE 2	QPSK20M	Bottom Side	5	19100	50	0	1	Ant 0	w/o	-	1.00	23.00	22.41	1.15	0.05	0.034	0.04
	LTE 2	QPSK20M	Bottom for Laptop	5	19100	1	0	1	Ant 2	w/o	-	1.00	24.00	23.36	1.16	0.04	0.458	0.53
	LTE 2	QPSK20M	Rear Face	10	19100	1	0	1	Ant 2	w/o	-	1.00	24.00	23.36	1.16	0.14	0.273	0.32
	LTE 2	QPSK20M	Left Side	0	19100	1	0	1	Ant 2	w/o	-	1.00	24.00	23.36	1.16	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	0	19100	1	0	1	Ant 2	w/o	-	1.00	24.00	23.36	1.16	0	<0.001	0.00
	LTE 2	QPSK20M	Top Side	0	19100	1	0	1	Ant 2	w/o	-	1.00	24.00	23.36	1.16	0	<0.001	0.00
	LTE 2	QPSK20M	Bottom Side	5	19100	1	0	1	Ant 2	w/o	-	1.00	24.00	23.36	1.16	-0.01	0.225	0.26
	LTE 2	QPSK20M	Bottom for Laptop	5	19100	50	0	1	Ant 2	w/o	-	1.00	23.00	22.41	1.15	0.15	0.371	0.43
	LTE 2	QPSK20M	Rear Face	10	19100	50	0	1	Ant 2	w/o	-	1.00	23.00	22.41	1.15	0.15	0.226	0.26
	LTE 2	QPSK20M	Left Side	0	19100	50	0	1	Ant 2	w/o	-	1.00	23.00	22.41	1.15	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	0	19100	50	0	1	Ant 2	w/o	-	1.00	23.00	22.41	1.15	0	<0.001	0.00
	LTE 2	QPSK20M	Top Side	0	19100	50	0	1	Ant 2	w/o	-	1.00	23.00	22.41	1.15	0	<0.001	0.00
	LTE 2	QPSK20M	Bottom Side	5	19100	50	0	1	Ant 2	w/o	-	1.00	23.00	22.41	1.15	0.06	0.175	0.20
	LTE 2	QPSK20M	Bottom for Laptop	0	19100	1	0	1	Ant 0	w/	-	1.00	18.00	17.99	1.00	0.01	0.157	0.16
	LTE 2	QPSK20M	Rear Face	0	19100	1	0	1	Ant 0	w/	-	1.00	16.00	15.85	1.04	-0.16	0.244	0.25
	LTE 2	QPSK20M	Bottom Side	0	19100	1	0	1	Ant 0	w/	-	1.00	16.00	15.85	1.04	-0.04	0.038	0.04
	LTE 2	QPSK20M	Bottom for Laptop	0	19100	50	0	1	Ant 0	w/	-	1.00	17.00	16.99	1.00	0.16	0.123	0.12
	LTE 2	QPSK20M	Rear Face	0	19100	50	0	1	Ant 0	w/	-	1.00	15.00	14.95	1.01	0.11	0.188	0.19
	LTE 2	QPSK20M	Bottom Side	0	19100	50	0	1	Ant 0	w/	-	1.00	15.00	14.95	1.01	-0.14	0.035	0.04
	LTE 2	QPSK20M	Bottom for Laptop	0	19100	1	0	1	Ant 2	w/	-	1.00	18.50	17.84	1.16	-0.18	0.432	0.50
	LTE 2	QPSK20M	Rear Face	0	19100	1	0	1	Ant 2	w/	-	1.00	17.00	16.81	1.04	-0.19	0.465	0.48
	LTE 2	QPSK20M	Bottom Side	0	19100	1	0	1	Ant 2	w/	-	1.00	17.00	16.81	1.04	-0.18	0.188	0.20
	LTE 2	QPSK20M	Bottom for Laptop	0	19100	50	0	1	Ant 2	w/	-	1.00	17.50	16.81	1.17	0.18	0.358	0.42
	LTE 2	QPSK20M	Rear Face	0	19100	50	0	1	Ant 2	w/	-	1.00	16.00	15.18	1.21	-0.15	0.428	0.52
	LTE 2	QPSK20M	Bottom Side	0	19100	50	0	1	Ant 2	w/	-	1.00	16.00	15.18	1.21	-0.15	0.137	0.17
	LTE 2	QPSK20M	Bottom for Laptop	5	18700	1	0	1	Ant 2	w/o	-	1.00	24.00	23.16	1.21	-0.02	0.451	0.55
4	LTE 2	QPSK20M	Bottom for Laptop	5	18900	1	0	1	Ant 2	w/o	-	1.00	24.00	23.28	1.18	0.04	0.512	0.60
	LTE 2	QPSK20M	Bottom for Laptop	5	18900	1	0	2	Ant 2	w/o	-	1.00	24.00	23.28	1.18	0.06	0.431	0.51

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 2 ENDC	QPSK20M	Bottom for Laptop	5	18900	1	0	1	Ant 2	w/o	-	1.00	21.00	20.28	1.18	-0.04	0.188	0.22
	LTE 4	QPSK20M	Bottom for Laptop	5	20050	1	0	1	Ant 0	w/o	-	1.00	24.00	22.57	1.39	0.04	0.157	0.22
	LTE 4	QPSK20M	Rear Face	10	20050	1	0	1	Ant 0	w/o	-	1.00	24.00	22.57	1.39	0.08	0.091	0.13
	LTE 4	QPSK20M	Left Side	0	20050	1	0	1	Ant 0	w/o	-	1.00	24.00	22.57	1.39	0	<0.001	0.00
	LTE 4	QPSK20M	Right Side	0	20050	1	0	1	Ant 0	w/o	-	1.00	24.00	22.57	1.39	0	<0.001	0.00
	LTE 4	QPSK20M	Top Side	0	20050	1	0	1	Ant 0	w/o	-	1.00	24.00	22.57	1.39	0	<0.001	0.00
	LTE 4	QPSK20M	Bottom Side	5	20050	1	0	1	Ant 0	w/o	-	1.00	24.00	22.57	1.39	0.13	0.068	0.09
	LTE 4	QPSK20M	Bottom for Laptop	5	20050	50	0	1	Ant 0	w/o	-	1.00	23.00	21.59	1.38	0.03	0.119	0.16
	LTE 4	QPSK20M	Rear Face	10	20050	50	0	1	Ant 0	w/o	-	1.00	23.00	21.59	1.38	-0.16	0.066	0.09
	LTE 4	QPSK20M	Left Side	0	20050	50	0	1	Ant 0	w/o	-	1.00	23.00	21.59	1.38	0	<0.001	0.00
	LTE 4	QPSK20M	Right Side	0	20050	50	0	1	Ant 0	w/o	-	1.00	23.00	21.59	1.38	0	<0.001	0.00
	LTE 4	QPSK20M	Top Side	0	20050	50	0	1	Ant 0	w/o	-	1.00	23.00	21.59	1.38	0	<0.001	0.00
	LTE 4	QPSK20M	Bottom Side	5	20050	50	0	1	Ant 0	w/o	-	1.00	23.00	21.59	1.38	0.16	0.053	0.07
	LTE 4	QPSK20M	Bottom for Laptop	5	20050	1	0	1	Ant 2	w/o	-	1.00	24.00	22.57	1.39	0.03	0.258	0.36
	LTE 4	QPSK20M	Rear Face	10	20050	1	0	1	Ant 2	w/o	-	1.00	24.00	22.57	1.39	0.19	0.097	0.13
	LTE 4	QPSK20M	Left Side	0	20050	1	0	1	Ant 2	w/o	-	1.00	24.00	22.57	1.39	0	<0.001	0.00
	LTE 4	QPSK20M	Right Side	0	20050	1	0	1	Ant 2	w/o	-	1.00	24.00	22.57	1.39	0	<0.001	0.00
	LTE 4	QPSK20M	Top Side	0	20050	1	0	1	Ant 2	w/o	-	1.00	24.00	22.57	1.39	0	<0.001	0.00
	LTE 4	QPSK20M	Bottom Side	5	20050	1	0	1	Ant 2	w/o	-	1.00	24.00	22.57	1.39	0.17	0.048	0.07
	LTE 4	QPSK20M	Bottom for Laptop	5	20050	50	0	1	Ant 2	w/o	-	1.00	23.00	21.59	1.38	0.16	0.211	0.29
	LTE 4	QPSK20M	Rear Face	10	20050	50	0	1	Ant 2	w/o	-	1.00	23.00	21.59	1.38	-0.07	0.081	0.11
	LTE 4	QPSK20M	Left Side	0	20050	50	0	1	Ant 2	w/o	-	1.00	23.00	21.59	1.38	0	<0.001	0.00
	LTE 4	QPSK20M	Right Side	0	20050	50	0	1	Ant 2	w/o	-	1.00	23.00	21.59	1.38	0	<0.001	0.00
	LTE 4	QPSK20M	Top Side	0	20050	50	0	1	Ant 2	w/o	-	1.00	23.00	21.59	1.38	0	<0.001	0.00
	LTE 4	QPSK20M	Bottom Side	5	20050	50	0	1	Ant 2	w/o	-	1.00	23.00	21.59	1.38	-0.13	0.038	0.05
	LTE 4	QPSK20M	Bottom for Laptop	0	20050	1	0	1	Ant 0	w/	-	1.00	19.00	18.99	1.00	0.04	0.172	0.17
	LTE 4	QPSK20M	Rear Face	0	20050	1	0	1	Ant 0	w/	-	1.00	18.50	17.93	1.14	0.04	0.261	0.30
	LTE 4	QPSK20M	Bottom Side	0	20050	1	0	1	Ant 0	w/	-	1.00	18.50	17.93	1.14	-0.12	0.072	0.08
	LTE 4	QPSK20M	Bottom for Laptop	0	20050	50	0	1	Ant 0	w/	-	1.00	18.00	17.99	1.00	-0.14	0.139	0.14
	LTE 4	QPSK20M	Rear Face	0	20050	50	0	1	Ant 0	w/	-	1.00	17.50	16.77	1.18	0.04	0.21	0.25
	LTE 4	QPSK20M	Bottom Side	0	20050	50	0	1	Ant 0	w/	-	1.00	17.50	16.77	1.18	0.05	0.054	0.06
	LTE 4	QPSK20M	Bottom for Laptop	0	20050	1	0	1	Ant 2	w/	-	1.00	22.00	21.79	1.05	-0.14	0.658	0.69
	LTE 4	QPSK20M	Rear Face	0	20050	1	0	1	Ant 2	w/	-	1.00	21.00	20.61	1.09	0.19	0.609	0.66
	LTE 4	QPSK20M	Bottom Side	0	20050	1	0	1	Ant 2	w/	-	1.00	21.00	20.61	1.09	-0.17	0.151	0.16
	LTE 4	QPSK20M	Bottom for Laptop	0	20050	50	0	1	Ant 2	w/	-	1.00	21.00	20.67	1.08	0.19	0.554	0.60
	LTE 4	QPSK20M	Rear Face	0	20050	50	0	1	Ant 2	w/	-	1.00	20.00	19.35	1.16	0.13	0.5	0.58
	LTE 4	QPSK20M	Bottom Side	0	20050	50	0	1	Ant 2	w/	-	1.00	20.00	19.35	1.16	-0.01	0.125	0.15
	LTE 4	QPSK20M	Bottom for Laptop	0	20050	100	0	1	Ant 2	w/	-	1.00	21.00	20.65	1.08	-0.18	0.572	0.62

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
5	LTE 4	QPSK20M	Bottom for Laptop	0	20175	1	0	1	Ant 2	w/	-	1.00	22.00	21.65	1.08	-0.14	0.72	0.78
	LTE 4	QPSK20M	Bottom for Laptop	0	20300	1	0	1	Ant 2	w/	-	1.00	22.00	21.71	1.07	-0.02	0.797	0.85
	LTE 4	QPSK20M	Bottom for Laptop	0	20300	1	0	2	Ant 2	w/	-	1.00	22.00	21.71	1.07	0.05	0.745	0.80
	LTE 4	QPSK20M	Bottom for Laptop	0	20050	1	0	2	Ant 2	w/	-	1.00	22.00	21.79	1.05	0.14	0.616	0.65
	LTE 4	QPSK20M	Bottom for Laptop	0	20175	1	0	2	Ant 2	w/	-	1.00	22.00	21.65	1.08	0.11	0.674	0.73
	LTE 4 ENDC	QPSK20M	Bottom for Laptop	0	20300	1	0	1	Ant 2	w/	-	1.00	19.00	18.71	1.07	-0.09	0.272	0.29
	LTE 5	QPSK10M	Bottom for Laptop	5	20450	1	0	1	Ant 0	w/o	-	1.00	25.00	24.88	1.03	0.11	0.483	0.50
	LTE 5	QPSK10M	Rear Face	10	20450	1	0	1	Ant 0	w/o	-	1.00	25.00	24.88	1.03	0.03	0.358	0.37
	LTE 5	QPSK10M	Left Side	0	20450	1	0	1	Ant 0	w/o	-	1.00	25.00	24.88	1.03	0	<0.001	0.00
	LTE 5	QPSK10M	Right Side	0	20450	1	0	1	Ant 0	w/o	-	1.00	25.00	24.88	1.03	0	<0.001	0.00
	LTE 5	QPSK10M	Top Side	0	20450	1	0	1	Ant 0	w/o	-	1.00	25.00	24.88	1.03	0	<0.001	0.00
	LTE 5	QPSK10M	Bottom Side	5	20450	1	0	1	Ant 0	w/o	-	1.00	25.00	24.88	1.03	0.03	0.377	0.39
	LTE 5	QPSK10M	Bottom for Laptop	5	20450	25	0	1	Ant 0	w/o	-	1.00	24.00	23.82	1.04	0.04	0.451	0.47
	LTE 5	QPSK10M	Rear Face	10	20450	25	0	1	Ant 0	w/o	-	1.00	24.00	23.82	1.04	0.07	0.278	0.29
	LTE 5	QPSK10M	Left Side	0	20450	25	0	1	Ant 0	w/o	-	1.00	24.00	23.82	1.04	0	<0.001	0.00
	LTE 5	QPSK10M	Right Side	0	20450	25	0	1	Ant 0	w/o	-	1.00	24.00	23.82	1.04	0	<0.001	0.00
	LTE 5	QPSK10M	Top Side	0	20450	25	0	1	Ant 0	w/o	-	1.00	24.00	23.82	1.04	0	<0.001	0.00
	LTE 5	QPSK10M	Bottom Side	5	20450	25	0	1	Ant 0	w/o	-	1.00	24.00	23.82	1.04	0.01	0.369	0.38
	LTE 5	QPSK10M	Bottom for Laptop	0	20450	1	0	1	Ant 0	w/	-	1.00	20.00	19.99	1.00	-0.03	0.481	0.48
	LTE 5	QPSK10M	Rear Face	0	20450	1	0	1	Ant 0	w/	-	1.00	18.00	17.96	1.01	-0.18	0.5	0.51
	LTE 5	QPSK10M	Bottom Side	0	20450	1	0	1	Ant 0	w/	-	1.00	18.00	17.96	1.01	-0.09	0.221	0.22
	LTE 5	QPSK10M	Bottom for Laptop	0	20450	25	0	1	Ant 0	w/	-	1.00	19.00	18.99	1.00	0.02	0.392	0.39
	LTE 5	QPSK10M	Rear Face	0	20450	25	0	1	Ant 0	w/	-	1.00	17.00	16.95	1.01	-0.03	0.387	0.39
	LTE 5	QPSK10M	Bottom Side	0	20450	25	0	1	Ant 0	w/	-	1.00	17.00	16.95	1.01	-0.16	0.172	0.17
6	LTE 5	QPSK10M	Rear Face	0	20525	1	0	1	Ant 0	w/	-	1.00	18.00	17.95	1.01	-0.06	0.511	0.52
	LTE 5	QPSK10M	Rear Face	0	20600	1	0	1	Ant 0	w/	-	1.00	18.00	17.93	1.02	0.03	0.433	0.44
	LTE 5	QPSK10M	Rear Face	0	20525	1	0	2	Ant 0	w/	-	1.00	18.00	17.95	1.01	-0.02	0.475	0.48
	LTE 5	QPSK10M	Rear Face	0	PCC:20450 SCC:20549	PCC:1 SCC:1	PCC:49 SCC:0	1	Ant 0	w/	-	1.00	18.00	17.12	1.22	0.03	0.301	0.37
	LTE 5 ENDC	QPSK10M	Rear Face	0	20525	1	0	1	Ant 0	w/	-	1.00	15.00	14.95	1.01	-0.04	0.143	0.14

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 7	QPSK20M	Bottom for Laptop	5	21350	1	0	1	Ant 0	w/o	-	1.00	24.00	22.86	1.30	0.11	0.173	0.22
	LTE 7	QPSK20M	Rear Face	10	21350	1	0	1	Ant 0	w/o	-	1.00	24.00	22.86	1.30	-0.08	0.035	0.05
	LTE 7	QPSK20M	Left Side	0	21350	1	0	1	Ant 0	w/o	-	1.00	24.00	22.86	1.30	0	<0.001	0.00
	LTE 7	QPSK20M	Right Side	0	21350	1	0	1	Ant 0	w/o	-	1.00	24.00	22.86	1.30	0	<0.001	0.00
	LTE 7	QPSK20M	Top Side	0	21350	1	0	1	Ant 0	w/o	-	1.00	24.00	22.86	1.30	0	<0.001	0.00
	LTE 7	QPSK20M	Bottom Side	5	21350	1	0	1	Ant 0	w/o	-	1.00	24.00	22.86	1.30	0.13	0.053	0.07
	LTE 7	QPSK20M	Bottom for Laptop	5	21350	50	0	1	Ant 0	w/o	-	1.00	23.00	21.91	1.29	0.02	0.144	0.19
	LTE 7	QPSK20M	Rear Face	10	21350	50	0	1	Ant 0	w/o	-	1.00	23.00	21.91	1.29	0	<0.001	0.00
	LTE 7	QPSK20M	Left Side	0	21350	50	0	1	Ant 0	w/o	-	1.00	23.00	21.91	1.29	0	<0.001	0.00
	LTE 7	QPSK20M	Right Side	0	21350	50	0	1	Ant 0	w/o	-	1.00	23.00	21.91	1.29	0	<0.001	0.00
	LTE 7	QPSK20M	Top Side	0	21350	50	0	1	Ant 0	w/o	-	1.00	23.00	21.91	1.29	0	<0.001	0.00
	LTE 7	QPSK20M	Bottom Side	5	21350	50	0	1	Ant 0	w/o	-	1.00	23.00	21.91	1.29	-0.01	0.043	0.06
7	LTE 7	QPSK20M	Bottom for Laptop	5	21350	1	0	1	Ant 2	w/o	-	1.00	24.00	22.86	1.30	0.08	0.587	0.76
	LTE 7	QPSK20M	Rear Face	10	21350	1	0	1	Ant 2	w/o	-	1.00	24.00	22.86	1.30	0.15	0.296	0.38
	LTE 7	QPSK20M	Left Side	0	21350	1	0	1	Ant 2	w/o	-	1.00	24.00	22.86	1.30	0	<0.001	0.00
	LTE 7	QPSK20M	Right Side	0	21350	1	0	1	Ant 2	w/o	-	1.00	24.00	22.86	1.30	0	<0.001	0.00
	LTE 7	QPSK20M	Top Side	0	21350	1	0	1	Ant 2	w/o	-	1.00	24.00	22.86	1.30	0	<0.001	0.00
	LTE 7	QPSK20M	Bottom Side	5	21350	1	0	1	Ant 2	w/o	-	1.00	24.00	22.86	1.30	-0.09	0.272	0.35
	LTE 7	QPSK20M	Bottom for Laptop	5	21350	50	0	1	Ant 2	w/o	-	1.00	23.00	21.91	1.29	-0.02	0.463	0.60
	LTE 7	QPSK20M	Rear Face	10	21350	50	0	1	Ant 2	w/o	-	1.00	23.00	21.91	1.29	-0.06	0.26	0.34
	LTE 7	QPSK20M	Left Side	0	21350	50	0	1	Ant 2	w/o	-	1.00	23.00	21.91	1.29	0	<0.001	0.00
	LTE 7	QPSK20M	Right Side	0	21350	50	0	1	Ant 2	w/o	-	1.00	23.00	21.91	1.29	0	<0.001	0.00
	LTE 7	QPSK20M	Top Side	0	21350	50	0	1	Ant 2	w/o	-	1.00	23.00	21.91	1.29	0	<0.001	0.00
	LTE 7	QPSK20M	Bottom Side	5	21350	50	0	1	Ant 2	w/o	-	1.00	23.00	21.91	1.29	0.06	0.156	0.20
	LTE 7	QPSK20M	Bottom for Laptop	0	21350	1	0	1	Ant 0	w/	-	1.00	16.50	16.04	1.11	-0.05	0.164	0.18
	LTE 7	QPSK20M	Rear Face	0	21350	1	0	1	Ant 0	w/	-	1.00	13.50	12.76	1.19	0	<0.001	0.00
	LTE 7	QPSK20M	Bottom Side	0	21350	1	0	1	Ant 0	w/	-	1.00	13.50	12.76	1.19	0	<0.001	0.00
	LTE 7	QPSK20M	Bottom for Laptop	0	21350	50	0	1	Ant 0	w/	-	1.00	15.50	15.14	1.09	0.02	0.139	0.15
	LTE 7	QPSK20M	Rear Face	0	21350	50	0	1	Ant 0	w/	-	1.00	12.50	11.78	1.18	0	<0.001	0.00
	LTE 7	QPSK20M	Bottom Side	0	21350	50	0	1	Ant 0	w/	-	1.00	12.50	11.78	1.18	0	<0.001	0.00
	LTE 7	QPSK20M	Bottom for Laptop	0	21350	1	0	1	Ant 2	w/	-	1.00	19.00	18.78	1.05	-0.12	0.601	0.63
	LTE 7	QPSK20M	Rear Face	0	21350	1	0	1	Ant 2	w/	-	1.00	18.00	17.31	1.17	0.06	0.61	0.71
	LTE 7	QPSK20M	Bottom Side	0	21350	1	0	1	Ant 2	w/	-	1.00	18.00	17.31	1.17	0.07	0.266	0.31
	LTE 7	QPSK20M	Bottom for Laptop	0	21350	50	0	1	Ant 2	w/	-	1.00	18.00	17.88	1.03	-0.12	0.506	0.52
	LTE 7	QPSK20M	Rear Face	0	21350	50	0	1	Ant 2	w/	-	1.00	17.00	16.35	1.16	-0.02	0.484	0.56
	LTE 7	QPSK20M	Bottom Side	0	21350	50	0	1	Ant 2	w/	-	1.00	17.00	16.35	1.16	0.06	0.208	0.24
	LTE 7	QPSK20M	Bottom for Laptop	5	20850	1	0	1	Ant 2	w/o	-	1.00	24.00	22.82	1.31	-0.09	0.416	0.54
	LTE 7	QPSK20M	Bottom for Laptop	5	21100	1	0	1	Ant 2	w/o	-	1.00	24.00	22.76	1.33	-0.08	0.497	0.66
	LTE 7	QPSK20M	Bottom for Laptop	5	21350	1	0	2	Ant 2	w/o	-	1.00	24.00	22.86	1.30	-0.12	0.569	0.74

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 7 ENDC	QPSK20M	Bottom for Laptop	5	21350	1	0	1	Ant 2	w/o	-	1.00	21.00	19.86	1.30	0.04	0.235	0.31
	LTE 12	QPSK10M	Bottom for Laptop	5	23060	1	0	1	Ant 0	w/o	-	1.00	24.00	23.40	1.15	0.06	0.269	0.31
	LTE 12	QPSK10M	Rear Face	10	23060	1	0	1	Ant 0	w/o	-	1.00	24.00	23.40	1.15	-0.11	0.153	0.18
	LTE 12	QPSK10M	Left Side	0	23060	1	0	1	Ant 0	w/o	-	1.00	24.00	23.40	1.15	0	<0.001	0.00
	LTE 12	QPSK10M	Right Side	0	23060	1	0	1	Ant 0	w/o	-	1.00	24.00	23.40	1.15	0	<0.001	0.00
	LTE 12	QPSK10M	Top Side	0	23060	1	0	1	Ant 0	w/o	-	1.00	24.00	23.40	1.15	0	<0.001	0.00
	LTE 12	QPSK10M	Bottom Side	5	23060	1	0	1	Ant 0	w/o	-	1.00	24.00	23.40	1.15	0.16	0.209	0.24
	LTE 12	QPSK10M	Bottom for Laptop	5	23060	25	0	1	Ant 0	w/o	-	1.00	23.00	22.20	1.20	-0.14	0.225	0.27
	LTE 12	QPSK10M	Rear Face	10	23060	25	0	1	Ant 0	w/o	-	1.00	23.00	22.20	1.20	0.07	0.132	0.16
	LTE 12	QPSK10M	Left Side	0	23060	25	0	1	Ant 0	w/o	-	1.00	23.00	22.20	1.20	0	<0.001	0.00
	LTE 12	QPSK10M	Right Side	0	23060	25	0	1	Ant 0	w/o	-	1.00	23.00	22.20	1.20	0	<0.001	0.00
	LTE 12	QPSK10M	Top Side	0	23060	25	0	1	Ant 0	w/o	-	1.00	23.00	22.20	1.20	0	<0.001	0.00
	LTE 12	QPSK10M	Bottom Side	5	23060	25	0	1	Ant 0	w/o	-	1.00	23.00	22.20	1.20	-0.16	0.141	0.17
	LTE 12	QPSK10M	Bottom for Laptop	0	23060	1	0	1	Ant 0	w/	-	1.00	23.00	22.83	1.04	-0.15	0.657	0.68
	LTE 12	QPSK10M	Rear Face	0	23060	1	0	1	Ant 0	w/	-	1.00	19.50	19.49	1.00	0.08	0.679	0.68
	LTE 12	QPSK10M	Bottom Side	0	23060	1	0	1	Ant 0	w/	-	1.00	19.50	19.49	1.00	-0.18	0.434	0.43
	LTE 12	QPSK10M	Bottom for Laptop	0	23060	25	0	1	Ant 0	w/	-	1.00	22.00	21.79	1.05	-0.18	0.542	0.57
	LTE 12	QPSK10M	Rear Face	0	23060	25	0	1	Ant 0	w/	-	1.00	18.50	18.48	1.00	0.17	0.595	0.60
	LTE 12	QPSK10M	Bottom Side	0	23060	25	0	1	Ant 0	w/	-	1.00	18.50	18.48	1.00	0.14	0.48	0.48
8	LTE 12	QPSK10M	Rear Face	0	23095	1	0	1	Ant 0	w/	-	1.00	19.50	19.35	1.04	-0.08	0.706	0.73
	LTE 12	QPSK10M	Rear Face	0	23130	1	0	1	Ant 0	w/	-	1.00	19.50	19.32	1.04	0.16	0.678	0.71
	LTE 12	QPSK10M	Rear Face	0	23095	1	0	2	Ant 0	w/	-	1.00	19.50	19.35	1.04	0.08	0.671	0.70
	LTE 12 ENDC	QPSK10M	Rear Face	0	23095	1	0	1	Ant 0	w/	-	1.00	16.50	16.35	1.04	-0.01	0.204	0.21

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 13	QPSK10M	Bottom for Laptop	5	23230	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	-0.03	0.324	0.41
	LTE 13	QPSK10M	Rear Face	10	23230	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	-0.12	0.3	0.38
	LTE 13	QPSK10M	Left Side	0	23230	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	0	<0.001	0.00
	LTE 13	QPSK10M	Right Side	0	23230	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	0	<0.001	0.00
	LTE 13	QPSK10M	Top Side	0	23230	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	0	<0.001	0.00
	LTE 13	QPSK10M	Bottom Side	5	23230	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	0.16	0.322	0.41
	LTE 13	QPSK10M	Bottom for Laptop	5	23230	25	0	1	Ant 0	w/o	-	1.00	23.00	21.97	1.27	0.15	0.255	0.32
	LTE 13	QPSK10M	Rear Face	10	23230	25	0	1	Ant 0	w/o	-	1.00	23.00	21.97	1.27	0.05	0.229	0.29
	LTE 13	QPSK10M	Left Side	0	23230	25	0	1	Ant 0	w/o	-	1.00	23.00	21.97	1.27	0	<0.001	0.00
	LTE 13	QPSK10M	Right Side	0	23230	25	0	1	Ant 0	w/o	-	1.00	23.00	21.97	1.27	0	<0.001	0.00
	LTE 13	QPSK10M	Top Side	0	23230	25	0	1	Ant 0	w/o	-	1.00	23.00	21.97	1.27	0	<0.001	0.00
	LTE 13	QPSK10M	Bottom Side	5	23230	25	0	1	Ant 0	w/o	-	1.00	23.00	21.97	1.27	0.08	0.241	0.31
	LTE 13	QPSK10M	Bottom for Laptop	0	23230	1	0	1	Ant 0	w/	-	1.00	23.00	22.05	1.24	-0.03	0.472	0.59
9	LTE 13	QPSK10M	Rear Face	0	23230	1	0	1	Ant 0	w/	-	1.00	19.00	18.95	1.01	-0.05	0.648	0.65
	LTE 13	QPSK10M	Bottom Side	0	23230	1	0	1	Ant 0	w/	-	1.00	19.00	18.95	1.01	-0.11	0.307	0.31
	LTE 13	QPSK10M	Bottom for Laptop	0	23230	25	0	1	Ant 0	w/	-	1.00	22.00	21.02	1.25	0.09	0.37	0.46
	LTE 13	QPSK10M	Rear Face	0	23230	25	0	1	Ant 0	w/	-	1.00	18.00	17.86	1.03	-0.04	0.433	0.45
	LTE 13	QPSK10M	Bottom Side	0	23230	25	0	1	Ant 0	w/	-	1.00	18.00	17.86	1.03	-0.19	0.246	0.25
	LTE 13	QPSK10M	Rear Face	0	23230	1	0	2	Ant 0	w/	-	1.00	19.00	18.95	1.01	-0.01	0.624	0.63
	LTE 13 ENDC	QPSK10M	Rear Face	0	23230	1	0	1	Ant 0	w/	-	1.00	16.00	15.95	1.01	0.04	0.212	0.21
	LTE 14	QPSK10M	Bottom for Laptop	5	23330	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	0.04	0.287	0.36
	LTE 14	QPSK10M	Rear Face	10	23330	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	0.05	0.295	0.37
	LTE 14	QPSK10M	Left Side	0	23330	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	0	<0.001	0.00
	LTE 14	QPSK10M	Right Side	0	23330	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	0	<0.001	0.00
	LTE 14	QPSK10M	Top Side	0	23330	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	0	<0.001	0.00
	LTE 14	QPSK10M	Bottom Side	5	23330	1	0	1	Ant 0	w/o	-	1.00	24.00	23.01	1.26	0.18	0.309	0.39
	LTE 14	QPSK10M	Bottom for Laptop	5	23330	25	0	1	Ant 0	w/o	-	1.00	23.00	21.98	1.26	0.01	0.223	0.28
	LTE 14	QPSK10M	Rear Face	10	23330	25	0	1	Ant 0	w/o	-	1.00	23.00	21.98	1.26	-0.13	0.231	0.29
	LTE 14	QPSK10M	Left Side	0	23330	25	0	1	Ant 0	w/o	-	1.00	23.00	21.98	1.26	0	<0.001	0.00
	LTE 14	QPSK10M	Right Side	0	23330	25	0	1	Ant 0	w/o	-	1.00	23.00	21.98	1.26	0	<0.001	0.00
	LTE 14	QPSK10M	Top Side	0	23330	25	0	1	Ant 0	w/o	-	1.00	23.00	21.98	1.26	0	<0.001	0.00
	LTE 14	QPSK10M	Bottom Side	5	23330	25	0	1	Ant 0	w/o	-	1.00	23.00	21.98	1.26	-0.05	0.186	0.23
10	LTE 14	QPSK10M	Bottom for Laptop	0	23330	1	0	1	Ant 0	w/	-	1.00	22.50	22.45	1.01	-0.07	0.596	0.60
	LTE 14	QPSK10M	Rear Face	0	23330	1	0	1	Ant 0	w/	-	1.00	19.00	18.98	1.00	-0.05	0.487	0.49
	LTE 14	QPSK10M	Bottom Side	0	23330	1	0	1	Ant 0	w/	-	1.00	19.00	18.98	1.00	-0.18	0.408	0.41
	LTE 14	QPSK10M	Bottom for Laptop	0	23330	25	0	1	Ant 0	w/	-	1.00	21.50	21.37	1.03	0.09	0.469	0.48
	LTE 14	QPSK10M	Rear Face	0	23330	25	0	1	Ant 0	w/	-	1.00	18.00	17.95	1.01	0.11	0.409	0.41
	LTE 14	QPSK10M	Bottom Side	0	23330	25	0	1	Ant 0	w/	-	1.00	18.00	17.95	1.01	0.09	0.211	0.21

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 14	QPSK10M	Bottom for Laptop	0	23330	1	0	2	Ant 0	w/	-	1.00	22.50	22.45	1.01	-0.01	0.582	0.59
	LTE 14 ENDC	QPSK10M	Bottom for Laptop	0	23330	1	0	1	Ant 0	w/	-	1.00	19.50	19.45	1.01	-0.04	0.212	0.21
	LTE 17	QPSK10M	Bottom for Laptop	5	23780	1	0	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	0.07	0.334	0.41
	LTE 17	QPSK10M	Rear Face	10	23780	1	0	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	0.07	0.182	0.22
	LTE 17	QPSK10M	Left Side	0	23780	1	0	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	0	<0.001	0.00
	LTE 17	QPSK10M	Right Side	0	23780	1	0	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	0	<0.001	0.00
	LTE 17	QPSK10M	Top Side	0	23780	1	0	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	0	<0.001	0.00
	LTE 17	QPSK10M	Bottom Side	5	23780	1	0	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	-0.13	0.201	0.25
	LTE 17	QPSK10M	Bottom for Laptop	5	23780	25	0	1	Ant 0	w/o	-	1.00	23.00	21.93	1.28	0.04	0.267	0.34
	LTE 17	QPSK10M	Rear Face	10	23780	25	0	1	Ant 0	w/o	-	1.00	23.00	21.93	1.28	-0.17	0.159	0.20
	LTE 17	QPSK10M	Left Side	0	23780	25	0	1	Ant 0	w/o	-	1.00	23.00	21.93	1.28	0	<0.001	0.00
	LTE 17	QPSK10M	Right Side	0	23780	25	0	1	Ant 0	w/o	-	1.00	23.00	21.93	1.28	0	<0.001	0.00
	LTE 17	QPSK10M	Top Side	0	23780	25	0	1	Ant 0	w/o	-	1.00	23.00	21.93	1.28	0	<0.001	0.00
	LTE 17	QPSK10M	Bottom Side	5	23780	25	0	1	Ant 0	w/o	-	1.00	23.00	21.93	1.28	0.15	0.17	0.22
11	LTE 17	QPSK10M	Bottom for Laptop	0	23780	1	0	1	Ant 0	w/	-	1.00	23.00	22.83	1.04	-0.13	0.846	0.88
	LTE 17	QPSK10M	Rear Face	0	23780	1	0	1	Ant 0	w/	-	1.00	19.50	19.45	1.01	-0.03	0.734	0.74
	LTE 17	QPSK10M	Bottom Side	0	23780	1	0	1	Ant 0	w/	-	1.00	19.50	19.45	1.01	0.15	0.531	0.54
	LTE 17	QPSK10M	Bottom for Laptop	0	23780	25	0	1	Ant 0	w/	-	1.00	22.00	21.64	1.09	-0.08	0.65	0.71
	LTE 17	QPSK10M	Rear Face	0	23780	25	0	1	Ant 0	w/	-	1.00	18.50	18.31	1.04	-0.14	0.584	0.61
	LTE 17	QPSK10M	Bottom Side	0	23780	25	0	1	Ant 0	w/	-	1.00	18.50	18.31	1.04	0.05	0.353	0.37
	LTE 17	QPSK10M	Bottom for Laptop	0	23780	50	0	1	Ant 0	w/	-	1.00	22.00	21.62	1.09	0.12	0.661	0.72
	LTE 17	QPSK10M	Bottom for Laptop	0	23790	1	0	1	Ant 0	w/	-	1.00	23.00	22.77	1.05	-0.09	0.818	0.86
	LTE 17	QPSK10M	Bottom for Laptop	0	23800	1	0	1	Ant 0	w/	-	1.00	23.00	22.76	1.06	-0.12	0.806	0.85
	LTE 17	QPSK10M	Bottom for Laptop	0	23780	1	0	2	Ant 0	w/	-	1.00	23.00	22.83	1.04	0.07	0.813	0.85
	LTE 17	QPSK10M	Bottom for Laptop	0	23790	1	0	2	Ant 0	w/	-	1.00	23.00	22.77	1.05	-0.15	0.788	0.83
	LTE 17	QPSK10M	Bottom for Laptop	0	23800	1	0	2	Ant 0	w/	-	1.00	23.00	22.76	1.06	0.12	0.775	0.82
	LTE 17 ENDC	QPSK10M	Bottom for Laptop	0	23780	1	0	1	Ant 0	w/	-	1.00	20.00	19.83	1.04	0.06	0.405	0.42
	LTE 17	QPSK10M	Bottom for Laptop	0	23780	1	0	1	Ant 0	w/	-	1.00	23.00	22.83	1.04	0.05	0.823	0.86

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 25	QPSK20M	Bottom for Laptop	5	26590	1	0	1	Ant 0	w/o	-	1.00	24.00	23.15	1.22	0.13	0.242	0.30
	LTE 25	QPSK20M	Rear Face	10	26590	1	0	1	Ant 0	w/o	-	1.00	24.00	23.15	1.22	0.19	0.181	0.22
	LTE 25	QPSK20M	Left Side	0	26590	1	0	1	Ant 0	w/o	-	1.00	24.00	23.15	1.22	0	<0.001	0.00
	LTE 25	QPSK20M	Right Side	0	26590	1	0	1	Ant 0	w/o	-	1.00	24.00	23.15	1.22	0	<0.001	0.00
	LTE 25	QPSK20M	Top Side	0	26590	1	0	1	Ant 0	w/o	-	1.00	24.00	23.15	1.22	0	<0.001	0.00
	LTE 25	QPSK20M	Bottom Side	5	26590	1	0	1	Ant 0	w/o	-	1.00	24.00	23.15	1.22	-0.14	0.075	0.09
	LTE 25	QPSK20M	Bottom for Laptop	5	26590	50	0	1	Ant 0	w/o	-	1.00	23.00	22.30	1.17	0.14	0.207	0.24
	LTE 25	QPSK20M	Rear Face	10	26590	50	0	1	Ant 0	w/o	-	1.00	23.00	22.30	1.17	0.02	0.149	0.17
	LTE 25	QPSK20M	Left Side	0	26590	50	0	1	Ant 0	w/o	-	1.00	23.00	22.30	1.17	0	<0.001	0.00
	LTE 25	QPSK20M	Right Side	0	26590	50	0	1	Ant 0	w/o	-	1.00	23.00	22.30	1.17	0	<0.001	0.00
	LTE 25	QPSK20M	Top Side	0	26590	50	0	1	Ant 0	w/o	-	1.00	23.00	22.30	1.17	0	<0.001	0.00
	LTE 25	QPSK20M	Bottom Side	5	26590	50	0	1	Ant 0	w/o	-	1.00	23.00	22.30	1.17	0.13	0.066	0.08
	LTE 25	QPSK20M	Bottom for Laptop	5	26590	1	0	1	Ant 2	w/o	-	1.00	24.00	23.15	1.22	0.16	0.582	0.71
	LTE 25	QPSK20M	Rear Face	10	26590	1	0	1	Ant 2	w/o	-	1.00	24.00	23.15	1.22	0.14	0.422	0.51
	LTE 25	QPSK20M	Left Side	0	26590	1	0	1	Ant 2	w/o	-	1.00	24.00	23.15	1.22	0	<0.001	0.00
	LTE 25	QPSK20M	Right Side	0	26590	1	0	1	Ant 2	w/o	-	1.00	24.00	23.15	1.22	0	<0.001	0.00
	LTE 25	QPSK20M	Top Side	0	26590	1	0	1	Ant 2	w/o	-	1.00	24.00	23.15	1.22	0	<0.001	0.00
	LTE 25	QPSK20M	Bottom Side	5	26590	1	0	1	Ant 2	w/o	-	1.00	24.00	23.15	1.22	0.12	0.337	0.41
	LTE 25	QPSK20M	Bottom for Laptop	5	26590	50	0	1	Ant 2	w/o	-	1.00	23.00	22.30	1.17	0.11	0.433	0.51
	LTE 25	QPSK20M	Rear Face	10	26590	50	0	1	Ant 2	w/o	-	1.00	23.00	22.30	1.17	-0.16	0.364	0.43
	LTE 25	QPSK20M	Left Side	0	26590	50	0	1	Ant 2	w/o	-	1.00	23.00	22.30	1.17	0	<0.001	0.00
	LTE 25	QPSK20M	Right Side	0	26590	50	0	1	Ant 2	w/o	-	1.00	23.00	22.30	1.17	0	<0.001	0.00
	LTE 25	QPSK20M	Top Side	0	26590	50	0	1	Ant 2	w/o	-	1.00	23.00	22.30	1.17	0	<0.001	0.00
	LTE 25	QPSK20M	Bottom Side	5	26590	50	0	1	Ant 2	w/o	-	1.00	23.00	22.30	1.17	-0.03	0.297	0.35
	LTE 25	QPSK20M	Bottom for Laptop	0	26590	1	0	1	Ant 0	w/	-	1.00	17.50	17.14	1.09	0.18	0.174	0.19
	LTE 25	QPSK20M	Rear Face	0	26590	1	0	1	Ant 0	w/	-	1.00	17.00	16.84	1.04	0.05	0.404	0.42
	LTE 25	QPSK20M	Bottom Side	0	26590	1	0	1	Ant 0	w/	-	1.00	17.00	16.84	1.04	-0.11	0.036	0.04
	LTE 25	QPSK20M	Bottom for Laptop	0	26590	50	0	1	Ant 0	w/	-	1.00	16.50	16.06	1.11	0.02	0.135	0.15
	LTE 25	QPSK20M	Rear Face	0	26590	50	0	1	Ant 0	w/	-	1.00	16.00	15.87	1.03	0.02	0.368	0.38
	LTE 25	QPSK20M	Bottom Side	0	26590	50	0	1	Ant 0	w/	-	1.00	16.00	15.87	1.03	0.04	0.036	0.04
	LTE 25	QPSK20M	Bottom for Laptop	0	26590	1	0	1	Ant 2	w/	-	1.00	18.50	18.10	1.10	0.02	0.474	0.52
	LTE 25	QPSK20M	Rear Face	0	26590	1	0	1	Ant 2	w/	-	1.00	17.00	16.95	1.01	-0.04	0.694	0.70
	LTE 25	QPSK20M	Bottom Side	0	26590	1	0	1	Ant 2	w/	-	1.00	17.00	16.95	1.01	0.18	0.25	0.25
	LTE 25	QPSK20M	Bottom for Laptop	0	26590	50	0	1	Ant 2	w/	-	1.00	17.50	17.07	1.10	0.06	0.38	0.42
	LTE 25	QPSK20M	Rear Face	0	26590	50	0	1	Ant 2	w/	-	1.00	16.00	15.87	1.03	0.15	0.545	0.56
	LTE 25	QPSK20M	Bottom Side	0	26590	50	0	1	Ant 2	w/	-	1.00	16.00	15.87	1.03	-0.05	0.217	0.22
12	LTE 25	QPSK20M	Bottom for Laptop	5	26140	1	0	1	Ant 2	w/o	-	1.00	24.00	22.87	1.30	-0.04	0.554	0.72
	LTE 25	QPSK20M	Bottom for Laptop	5	26365	1	0	1	Ant 2	w/o	-	1.00	24.00	23.04	1.25	0.06	0.545	0.68
	LTE 25	QPSK20M	Bottom for Laptop	5	26140	1	0	2	Ant 2	w/o	-	1.00	24.00	22.87	1.30	-0.18	0.541	0.70

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 25 ENDC	QPSK20M	Bottom for Laptop	5	26140	1	0	1	Ant 2	w/o	-	1.00	21.00	19.87	1.30	-0.13	0.205	0.27
	LTE 26	QPSK15M	Bottom for Laptop	5	26765	1	0	1	Ant 0	w/o	-	1.00	25.00	23.55	1.40	0.02	0.299	0.42
	LTE 26	QPSK15M	Rear Face	10	26765	1	0	1	Ant 0	w/o	-	1.00	25.00	23.55	1.40	0.06	0.2	0.28
	LTE 26	QPSK15M	Left Side	0	26765	1	0	1	Ant 0	w/o	-	1.00	25.00	23.55	1.40	0	<0.001	0.00
	LTE 26	QPSK15M	Right Side	0	26765	1	0	1	Ant 0	w/o	-	1.00	25.00	23.55	1.40	0	<0.001	0.00
	LTE 26	QPSK15M	Top Side	0	26765	1	0	1	Ant 0	w/o	-	1.00	25.00	23.55	1.40	0	<0.001	0.00
	LTE 26	QPSK15M	Bottom Side	5	26765	1	0	1	Ant 0	w/o	-	1.00	25.00	23.55	1.40	-0.16	0.216	0.30
	LTE 26	QPSK15M	Bottom for Laptop	5	26765	36	0	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	-0.12	0.24	0.33
	LTE 26	QPSK15M	Rear Face	10	26765	36	0	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	0.13	0.161	0.22
	LTE 26	QPSK15M	Left Side	0	26765	36	0	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	0	<0.001	0.00
	LTE 26	QPSK15M	Right Side	0	26765	36	0	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	0	<0.001	0.00
	LTE 26	QPSK15M	Top Side	0	26765	36	0	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	0	<0.001	0.00
	LTE 26	QPSK15M	Bottom Side	5	26765	36	0	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	-0.11	0.157	0.22
	LTE 26	QPSK15M	Bottom for Laptop	0	26765	1	0	1	Ant 0	w/	-	1.00	21.50	21.18	1.08	0.11	0.499	0.54
	LTE 26	QPSK15M	Rear Face	0	26765	1	0	1	Ant 0	w/	-	1.00	18.50	18.07	1.10	-0.07	0.427	0.47
	LTE 26	QPSK15M	Bottom Side	0	26765	1	0	1	Ant 0	w/	-	1.00	18.50	18.07	1.10	-0.09	0.174	0.19
	LTE 26	QPSK15M	Bottom for Laptop	0	26765	36	0	1	Ant 0	w/	-	1.00	20.50	20.16	1.08	-0.08	0.421	0.45
	LTE 26	QPSK15M	Rear Face	0	26765	36	0	1	Ant 0	w/	-	1.00	17.50	17.07	1.10	-0.06	0.345	0.38
	LTE 26	QPSK15M	Bottom Side	0	26765	36	0	1	Ant 0	w/	-	1.00	17.50	17.07	1.10	0.13	0.186	0.20
13	LTE 26	QPSK15M	Bottom for Laptop	0	26865	1	0	1	Ant 0	w/	-	1.00	21.50	21.15	1.08	-0.16	0.556	0.60
	LTE 26	QPSK15M	Bottom for Laptop	0	26965	1	0	1	Ant 0	w/	-	1.00	21.50	21.14	1.09	-0.17	0.533	0.58
	LTE 26	QPSK15M	Bottom for Laptop	0	26865	1	0	2	Ant 0	w/	-	1.00	21.50	21.15	1.08	0.01	0.535	0.58
	LTE 26 ENDC	QPSK15M	Bottom for Laptop	0	26865	1	0	1	Ant 0	w/	-	1.00	18.50	18.15	1.08	-0.18	0.204	0.22

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 30	QPSK10M	Bottom for Laptop	5	27710	1	0	1	Ant 0	w/o	-	1.00	23.00	21.73	1.34	0.01	0.067	0.09
	LTE 30	QPSK10M	Rear Face	10	27710	1	0	1	Ant 0	w/o	-	1.00	23.00	21.73	1.34	-0.11	0.034	0.05
	LTE 30	QPSK10M	Left Side	0	27710	1	0	1	Ant 0	w/o	-	1.00	23.00	21.73	1.34	0	<0.001	0.00
	LTE 30	QPSK10M	Right Side	0	27710	1	0	1	Ant 0	w/o	-	1.00	23.00	21.73	1.34	0	<0.001	0.00
	LTE 30	QPSK10M	Top Side	0	27710	1	0	1	Ant 0	w/o	-	1.00	23.00	21.73	1.34	0	<0.001	0.00
	LTE 30	QPSK10M	Bottom Side	5	27710	1	0	1	Ant 0	w/o	-	1.00	23.00	21.73	1.34	0	<0.001	0.00
	LTE 30	QPSK10M	Bottom for Laptop	5	27710	25	0	1	Ant 0	w/o	-	1.00	22.00	20.78	1.32	-0.15	0.053	0.07
	LTE 30	QPSK10M	Rear Face	10	27710	25	0	1	Ant 0	w/o	-	1.00	22.00	20.78	1.32	0	<0.001	0.00
	LTE 30	QPSK10M	Left Side	0	27710	25	0	1	Ant 0	w/o	-	1.00	22.00	20.78	1.32	0	<0.001	0.00
	LTE 30	QPSK10M	Right Side	0	27710	25	0	1	Ant 0	w/o	-	1.00	22.00	20.78	1.32	0	<0.001	0.00
	LTE 30	QPSK10M	Top Side	0	27710	25	0	1	Ant 0	w/o	-	1.00	22.00	20.78	1.32	0	<0.001	0.00
	LTE 30	QPSK10M	Bottom Side	5	27710	25	0	1	Ant 0	w/o	-	1.00	22.00	20.78	1.32	0	<0.001	0.00
	LTE 30	QPSK10M	Bottom for Laptop	5	27710	1	0	1	Ant 2	w/o	-	1.00	23.00	21.73	1.34	0.08	0.178	0.24
	LTE 30	QPSK10M	Rear Face	10	27710	1	0	1	Ant 2	w/o	-	1.00	23.00	21.73	1.34	0.05	0.058	0.08
	LTE 30	QPSK10M	Left Side	0	27710	1	0	1	Ant 2	w/o	-	1.00	23.00	21.73	1.34	0	<0.001	0.00
	LTE 30	QPSK10M	Right Side	0	27710	1	0	1	Ant 2	w/o	-	1.00	23.00	21.73	1.34	0	<0.001	0.00
	LTE 30	QPSK10M	Top Side	0	27710	1	0	1	Ant 2	w/o	-	1.00	23.00	21.73	1.34	0	<0.001	0.00
	LTE 30	QPSK10M	Bottom Side	5	27710	1	0	1	Ant 2	w/o	-	1.00	23.00	21.73	1.34	0.13	0.08	0.11
	LTE 30	QPSK10M	Bottom for Laptop	5	27710	25	0	1	Ant 2	w/o	-	1.00	22.00	20.78	1.32	-0.08	0.14	0.18
	LTE 30	QPSK10M	Rear Face	10	27710	25	0	1	Ant 2	w/o	-	1.00	22.00	20.78	1.32	0.13	0.052	0.07
	LTE 30	QPSK10M	Left Side	0	27710	25	0	1	Ant 2	w/o	-	1.00	22.00	20.78	1.32	0	<0.001	0.00
	LTE 30	QPSK10M	Right Side	0	27710	25	0	1	Ant 2	w/o	-	1.00	22.00	20.78	1.32	0	<0.001	0.00
	LTE 30	QPSK10M	Top Side	0	27710	25	0	1	Ant 2	w/o	-	1.00	22.00	20.78	1.32	0	<0.001	0.00
	LTE 30	QPSK10M	Bottom Side	5	27710	25	0	1	Ant 2	w/o	-	1.00	22.00	20.78	1.32	-0.12	0.069	0.09
	LTE 30	QPSK10M	Bottom for Laptop	0	27710	1	0	1	Ant 0	w/	-	1.00	17.50	17.13	1.09	-0.17	0.092	0.10
	LTE 30	QPSK10M	Rear Face	0	27710	1	0	1	Ant 0	w/	-	1.00	14.50	13.88	1.15	-0.13	0.05	0.06
	LTE 30	QPSK10M	Bottom Side	0	27710	1	0	1	Ant 0	w/	-	1.00	14.50	13.88	1.15	0	<0.001	0.00
	LTE 30	QPSK10M	Bottom for Laptop	0	27710	25	0	1	Ant 0	w/	-	1.00	16.50	15.98	1.13	-0.16	0.073	0.08
	LTE 30	QPSK10M	Rear Face	0	27710	25	0	1	Ant 0	w/	-	1.00	13.50	12.74	1.19	0.17	0.046	0.05
	LTE 30	QPSK10M	Bottom Side	0	27710	25	0	1	Ant 0	w/	-	1.00	13.50	12.74	1.19	0	<0.001	0.00
14	LTE 30	QPSK10M	Bottom for Laptop	0	27710	1	0	1	Ant 2	w/	-	1.00	22.00	21.52	1.12	0.04	0.595	0.67
	LTE 30	QPSK10M	Rear Face	0	27710	1	0	1	Ant 2	w/	-	1.00	22.00	21.52	1.12	0.09	0.499	0.56
	LTE 30	QPSK10M	Bottom Side	0	27710	1	0	1	Ant 2	w/	-	1.00	22.00	21.52	1.12	0.03	0.27	0.30
	LTE 30	QPSK10M	Bottom for Laptop	0	27710	25	0	1	Ant 2	w/	-	1.00	21.00	20.44	1.14	-0.02	0.475	0.54
	LTE 30	QPSK10M	Rear Face	0	27710	25	0	1	Ant 2	w/	-	1.00	21.00	20.44	1.14	0.12	0.398	0.45
	LTE 30	QPSK10M	Bottom Side	0	27710	25	0	1	Ant 2	w/	-	1.00	21.00	20.44	1.14	-0.11	0.207	0.24
	LTE 30	QPSK10M	Bottom for Laptop	0	27710	1	0	2	Ant 2	w/	-	1.00	22.00	21.52	1.12	-0.13	0.576	0.65
	LTE 30 ENDC	QPSK10M	Bottom for Laptop	0	27710	1	0	1	Ant 2	w/	-	1.00	19.00	18.52	1.12	-0.09	0.228	0.26

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 38	QPSK20M	Bottom for Laptop	5	38000	1	0	1	Ant 0	w/o	-	1.00	24.00	23.28	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Rear Face	10	38000	1	0	1	Ant 0	w/o	-	1.00	24.00	23.28	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Left Side	0	38000	1	0	1	Ant 0	w/o	-	1.00	24.00	23.28	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Right Side	0	38000	1	0	1	Ant 0	w/o	-	1.00	24.00	23.28	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Top Side	0	38000	1	0	1	Ant 0	w/o	-	1.00	24.00	23.28	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom Side	5	38000	1	0	1	Ant 0	w/o	-	1.00	24.00	23.28	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom for Laptop	5	38000	50	0	1	Ant 0	w/o	-	1.00	23.00	22.38	1.15	0	<0.001	0.00
	LTE 38	QPSK20M	Rear Face	10	38000	50	0	1	Ant 0	w/o	-	1.00	23.00	22.38	1.15	0	<0.001	0.00
	LTE 38	QPSK20M	Left Side	0	38000	50	0	1	Ant 0	w/o	-	1.00	23.00	22.38	1.15	0	<0.001	0.00
	LTE 38	QPSK20M	Right Side	0	38000	50	0	1	Ant 0	w/o	-	1.00	23.00	22.38	1.15	0	<0.001	0.00
	LTE 38	QPSK20M	Top Side	0	38000	50	0	1	Ant 0	w/o	-	1.00	23.00	22.38	1.15	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom Side	5	38000	50	0	1	Ant 0	w/o	-	1.00	23.00	22.38	1.15	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom for Laptop	5	38000	1	0	1	Ant 2	w/o	-	1.00	24.00	23.28	1.18	0.18	0.279	0.33
	LTE 38	QPSK20M	Rear Face	10	38000	1	0	1	Ant 2	w/o	-	1.00	24.00	23.28	1.18	0.08	0.197	0.23
	LTE 38	QPSK20M	Left Side	0	38000	1	0	1	Ant 2	w/o	-	1.00	24.00	23.28	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Right Side	0	38000	1	0	1	Ant 2	w/o	-	1.00	24.00	23.28	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Top Side	0	38000	1	0	1	Ant 2	w/o	-	1.00	24.00	23.28	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom Side	5	38000	1	0	1	Ant 2	w/o	-	1.00	24.00	23.28	1.18	-0.14	0.114	0.13
	LTE 38	QPSK20M	Bottom for Laptop	5	38000	50	0	1	Ant 2	w/o	-	1.00	23.00	22.38	1.15	0.12	0.212	0.24
	LTE 38	QPSK20M	Rear Face	10	38000	50	0	1	Ant 2	w/o	-	1.00	23.00	22.38	1.15	0.05	0.168	0.19
	LTE 38	QPSK20M	Left Side	0	38000	50	0	1	Ant 2	w/o	-	1.00	23.00	22.38	1.15	0	<0.001	0.00
	LTE 38	QPSK20M	Right Side	0	38000	50	0	1	Ant 2	w/o	-	1.00	23.00	22.38	1.15	0	<0.001	0.00
	LTE 38	QPSK20M	Top Side	0	38000	50	0	1	Ant 2	w/o	-	1.00	23.00	22.38	1.15	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom Side	5	38000	50	0	1	Ant 2	w/o	-	1.00	23.00	22.38	1.15	-0.14	0.2	0.23
	LTE 38	QPSK20M	Bottom for Laptop	0	38000	1	0	1	Ant 0	w/	-	1.00	20.00	19.91	1.02	-0.11	0.071	0.07
	LTE 38	QPSK20M	Rear Face	0	38000	1	0	1	Ant 0	w/	-	1.00	17.50	16.78	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom Side	0	38000	1	0	1	Ant 0	w/	-	1.00	17.50	16.78	1.18	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom for Laptop	0	38000	50	0	1	Ant 0	w/	-	1.00	19.00	18.96	1.01	0.14	0.059	0.06
	LTE 38	QPSK20M	Rear Face	0	38000	50	0	1	Ant 0	w/	-	1.00	16.50	15.82	1.17	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom Side	0	38000	50	0	1	Ant 0	w/	-	1.00	16.50	15.82	1.17	0	<0.001	0.00
	LTE 38	QPSK20M	Bottom for Laptop	0	38000	1	0	1	Ant 2	w/	-	1.00	23.00	22.87	1.03	-0.17	0.935	0.96
	LTE 38	QPSK20M	Rear Face	0	38000	1	0	1	Ant 2	w/	-	1.00	21.50	21.45	1.01	-0.12	0.867	0.88
	LTE 38	QPSK20M	Bottom Side	0	38000	1	0	1	Ant 2	w/	-	1.00	21.50	21.45	1.01	0.04	0.149	0.15
	LTE 38	QPSK20M	Bottom for Laptop	0	38000	50	0	1	Ant 2	w/	-	1.00	22.00	21.87	1.03	0.06	0.714	0.74
	LTE 38	QPSK20M	Rear Face	0	38000	50	0	1	Ant 2	w/	-	1.00	20.50	20.28	1.05	-0.16	0.663	0.70
	LTE 38	QPSK20M	Bottom Side	0	38000	50	0	1	Ant 2	w/	-	1.00	20.50	20.28	1.05	-0.16	0.234	0.25
	LTE 38	QPSK20M	Bottom for Laptop	0	38000	100	0	1	Ant 2	w/	-	1.00	22.00	21.83	1.04	0.06	0.704	0.73
	LTE 38	QPSK20M	Rear Face	0	38000	100	0	1	Ant 2	w/	-	1.00	20.50	20.25	1.06	-0.05	0.652	0.69
	LTE 38	QPSK20M	Bottom for Laptop	0	37850	1	0	1	Ant 2	w/	-	1.00	23.00	22.77	1.05	0.04	0.876	0.92

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
15	LTE 38	QPSK20M	Bottom for Laptop	0	38150	1	0	1	Ant 2	w/	-	1.00	23.00	22.81	1.04	0.03	0.88	0.92
	LTE 38	QPSK20M	Rear Face	0	37850	1	0	1	Ant 2	w/	-	1.00	21.50	21.41	1.02	-0.05	0.949	0.97
	LTE 38	QPSK20M	Rear Face	0	38150	1	0	1	Ant 2	w/	-	1.00	21.50	21.36	1.03	0.12	0.801	0.83
	LTE 38	QPSK20M	Rear Face	0	37850	1	0	2	Ant 2	w/	-	1.00	21.50	21.41	1.02	0.04	0.841	0.86
	LTE 38	QPSK20M	Rear Face	0	38000	1	0	2	Ant 2	w/	-	1.00	21.50	21.45	1.01	0.11	0.701	0.71
	LTE 38	QPSK20M	Rear Face	0	38150	1	0	2	Ant 2	w/	-	1.00	21.50	21.36	1.03	-0.02	0.833	0.86
	LTE 38	QPSK20M	Rear Face	0	PCC:37901 SCC:38099	PCC:1 SCC:1	PCC:99 SCC:0	1	Ant 2	w/	-	1.00	21.50	20.41	1.29	0.11	0.558	0.72
	LTE 38 ENDC	QPSK20M	Rear Face	0	37850	1	0	1	Ant 2	w/	-	1.00	18.50	18.41	1.02	-0.07	0.356	0.36
	LTE 38	QPSK20M	Rear Face	0	37850	1	0	1	Ant 2	w/	-	1.00	21.50	21.41	1.02	0.07	0.911	0.93
	LTE 41	QPSK20M	Bottom for Laptop	5	41055	1	0	1	Ant 0	w/o	-	1.00	24.00	22.99	1.26	-0.01	0.143	0.18
	LTE 41	QPSK20M	Rear Face	10	41055	1	0	1	Ant 0	w/o	-	1.00	24.00	22.99	1.26	-0.06	0.123	0.15
	LTE 41	QPSK20M	Left Side	0	41055	1	0	1	Ant 0	w/o	-	1.00	24.00	22.99	1.26	0	<0.001	0.00
	LTE 41	QPSK20M	Right Side	0	41055	1	0	1	Ant 0	w/o	-	1.00	24.00	22.99	1.26	0	<0.001	0.00
	LTE 41	QPSK20M	Top Side	0	41055	1	0	1	Ant 0	w/o	-	1.00	24.00	22.99	1.26	0	<0.001	0.00
	LTE 41	QPSK20M	Bottom Side	5	41055	1	0	1	Ant 0	w/o	-	1.00	24.00	22.99	1.26	0.06	0.059	0.07
	LTE 41	QPSK20M	Bottom for Laptop	5	41055	50	0	1	Ant 0	w/o	-	1.00	23.00	21.96	1.27	-0.14	0.112	0.14
	LTE 41	QPSK20M	Rear Face	10	41055	50	0	1	Ant 0	w/o	-	1.00	23.00	21.96	1.27	0.02	0.098	0.12
	LTE 41	QPSK20M	Left Side	0	41055	50	0	1	Ant 0	w/o	-	1.00	23.00	21.96	1.27	0	<0.001	0.00
	LTE 41	QPSK20M	Right Side	0	41055	50	0	1	Ant 0	w/o	-	1.00	23.00	21.96	1.27	0	<0.001	0.00
	LTE 41	QPSK20M	Top Side	0	41055	50	0	1	Ant 0	w/o	-	1.00	23.00	21.96	1.27	0	<0.001	0.00
	LTE 41	QPSK20M	Bottom Side	5	41055	50	0	1	Ant 0	w/o	-	1.00	23.00	21.96	1.27	-0.06	0.047	0.06
	LTE 41	QPSK20M	Bottom for Laptop	5	41055	1	0	1	Ant 2	w/o	-	1.00	24.00	22.99	1.26	-0.04	0.175	0.22
	LTE 41	QPSK20M	Rear Face	10	41055	1	0	1	Ant 2	w/o	-	1.00	24.00	22.99	1.26	0.06	0.123	0.15
	LTE 41	QPSK20M	Left Side	0	41055	1	0	1	Ant 2	w/o	-	1.00	24.00	22.99	1.26	0	<0.001	0.00
	LTE 41	QPSK20M	Right Side	0	41055	1	0	1	Ant 2	w/o	-	1.00	24.00	22.99	1.26	0	<0.001	0.00
	LTE 41	QPSK20M	Top Side	0	41055	1	0	1	Ant 2	w/o	-	1.00	24.00	22.99	1.26	0	<0.001	0.00
	LTE 41	QPSK20M	Bottom Side	5	41055	1	0	1	Ant 2	w/o	-	1.00	24.00	22.99	1.26	0.05	0.042	0.05
	LTE 41	QPSK20M	Bottom for Laptop	5	41055	50	0	1	Ant 2	w/o	-	1.00	23.00	21.96	1.27	-0.14	0.132	0.17
	LTE 41	QPSK20M	Rear Face	10	41055	50	0	1	Ant 2	w/o	-	1.00	23.00	21.96	1.27	0.12	0.098	0.12
	LTE 41	QPSK20M	Left Side	0	41055	50	0	1	Ant 2	w/o	-	1.00	23.00	21.96	1.27	0	<0.001	0.00
	LTE 41	QPSK20M	Right Side	0	41055	50	0	1	Ant 2	w/o	-	1.00	23.00	21.96	1.27	0	<0.001	0.00
	LTE 41	QPSK20M	Top Side	0	41055	50	0	1	Ant 2	w/o	-	1.00	23.00	21.96	1.27	0	<0.001	0.00
	LTE 41	QPSK20M	Bottom Side	5	41055	50	0	1	Ant 2	w/o	-	1.00	23.00	21.96	1.27	-0.17	0.029	0.04
	LTE 41	QPSK20M	Bottom for Laptop	0	41055	1	0	1	Ant 0	w/	-	1.00	23.00	22.64	1.09	0.04	0.205	0.22
	LTE 41	QPSK20M	Rear Face	0	41055	1	0	1	Ant 0	w/	-	1.00	20.50	20.35	1.04	0.18	0.054	0.06
	LTE 41	QPSK20M	Bottom Side	0	41055	1	0	1	Ant 0	w/	-	1.00	20.50	20.35	1.04	-0.18	0.052	0.05
	LTE 41	QPSK20M	Bottom for Laptop	0	41055	50	0	1	Ant 0	w/	-	1.00	22.00	21.54	1.11	-0.19	0.137	0.15

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 41	QPSK20M	Rear Face	0	41055	50	0	1	Ant 0	w/	-	1.00	19.50	19.34	1.04	0.07	0.047	0.05
	LTE 41	QPSK20M	Bottom Side	0	41055	50	0	1	Ant 0	w/	-	1.00	19.50	19.34	1.04	0.11	0.044	0.05
	LTE 41	QPSK20M	Bottom for Laptop	0	41055	1	0	1	Ant 2	w/	-	1.00	23.00	22.99	1.00	-0.09	0.595	0.60
	LTE 41	QPSK20M	Rear Face	0	41055	1	0	1	Ant 2	w/	-	1.00	18.50	18.15	1.08	0.03	0.213	0.23
	LTE 41	QPSK20M	Bottom Side	0	41055	1	0	1	Ant 2	w/	-	1.00	18.50	18.15	1.08	-0.18	0.073	0.08
	LTE 41	QPSK20M	Bottom for Laptop	0	41055	50	0	1	Ant 2	w/	-	1.00	22.00	21.99	1.00	-0.16	0.46	0.46
	LTE 41	QPSK20M	Rear Face	0	41055	50	0	1	Ant 2	w/	-	1.00	17.50	17.09	1.10	0.13	0.178	0.20
	LTE 41	QPSK20M	Bottom Side	0	41055	50	0	1	Ant 2	w/	-	1.00	17.50	17.09	1.10	-0.12	0.052	0.06
	LTE 41	QPSK20M	Bottom for Laptop	0	41055	100	0	1	Ant 2	w/	-	1.00	22.00	21.96	1.01	0.14	0.452	0.46
	LTE 41	QPSK20M	Bottom for Laptop	0	39750	1	0	1	Ant 2	w/	-	1.00	23.00	22.66	1.08	-0.14	0.734	0.79
16	LTE 41	QPSK20M	Bottom for Laptop	0	40185	1	0	1	Ant 2	w/	-	1.00	23.00	22.67	1.08	0.01	0.809	0.87
	LTE 41	QPSK20M	Bottom for Laptop	0	40620	1	0	1	Ant 2	w/	-	1.00	23.00	22.71	1.07	0.1	0.713	0.76
	LTE 41	QPSK20M	Bottom for Laptop	0	41490	1	0	1	Ant 2	w/	-	1.00	23.00	22.92	1.02	0.12	0.51	0.52
	LTE 41	QPSK20M	Bottom for Laptop	0	40185	1	0	2	Ant 2	w/	-	1.00	23.00	22.67	1.08	0.08	0.767	0.83
	LTE 41	QPSK20M	Bottom for Laptop	0	39750	1	0	2	Ant 2	w/	-	1.00	23.00	22.66	1.08	-0.02	0.697	0.75
	LTE 41	QPSK20M	Bottom for Laptop	0	40620	1	0	2	Ant 2	w/	-	1.00	23.00	22.71	1.07	-0.07	0.676	0.72
	LTE 41	QPSK20M	Bottom for Laptop	0	41055	1	0	2	Ant 2	w/	-	1.00	23.00	22.99	1.00	0.02	0.564	0.56
	LTE 41	QPSK20M	Bottom for Laptop	0	41490	1	0	2	Ant 2	w/	-	1.00	23.00	22.92	1.02	0.11	0.484	0.49
	LTE 41 PC2	QPSK20M	Bottom for Laptop	5	41055	1	0	1	Ant 2	w/o	-	1.00	27.00	26.03	1.25	0.04	0.221	0.28
	LTE 41	QPSK20M	Bottom for Laptop	0	PCC:40956 SCC:41154	PCC:1 SCC:1	PCC:99 SCC:0	1	Ant 2	w/	-	1.00	23.00	22.53	1.11	0.14	0.476	0.53
	LTE 41 ENDC	QPSK20M	Bottom for Laptop	0	40185	1	0	1	Ant 2	w/	-	1.00	20.00	19.67	1.08	-0.15	0.241	0.26
	LTE 41	QPSK20M	Bottom for Laptop	0	40185	1	0	1	Ant 2	w/	-	1.00	23.00	22.67	1.08	-0.17	0.792	0.86

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 48	QPSK20M	Bottom for Laptop	5	55340	1	0	1	Ant 0	w/o	-	1.00	22.00	21.15	1.22	0.08	0.127	0.15
	LTE 48	QPSK20M	Rear Face	10	55340	1	0	1	Ant 0	w/o	-	1.00	22.00	21.15	1.22	0.02	0.093	0.11
	LTE 48	QPSK20M	Left Side	0	55340	1	0	1	Ant 0	w/o	-	1.00	22.00	21.15	1.22	0	<0.001	0.00
	LTE 48	QPSK20M	Right Side	0	55340	1	0	1	Ant 0	w/o	-	1.00	22.00	21.15	1.22	0	<0.001	0.00
	LTE 48	QPSK20M	Top Side	0	55340	1	0	1	Ant 0	w/o	-	1.00	22.00	21.15	1.22	0	<0.001	0.00
	LTE 48	QPSK20M	Bottom Side	5	55340	1	0	1	Ant 0	w/o	-	1.00	22.00	21.15	1.22	0.03	0.087	0.11
	LTE 48	QPSK20M	Bottom for Laptop	5	55340	50	0	1	Ant 0	w/o	-	1.00	21.00	20.08	1.24	-0.19	0.105	0.13
	LTE 48	QPSK20M	Rear Face	10	55340	50	0	1	Ant 0	w/o	-	1.00	21.00	20.08	1.24	-0.03	0.078	0.10
	LTE 48	QPSK20M	Left Side	0	55340	50	0	1	Ant 0	w/o	-	1.00	21.00	20.08	1.24	0	<0.001	0.00
	LTE 48	QPSK20M	Right Side	0	55340	50	0	1	Ant 0	w/o	-	1.00	21.00	20.08	1.24	0	<0.001	0.00
	LTE 48	QPSK20M	Top Side	0	55340	50	0	1	Ant 0	w/o	-	1.00	21.00	20.08	1.24	0	<0.001	0.00
	LTE 48	QPSK20M	Bottom Side	5	55340	50	0	1	Ant 0	w/o	-	1.00	21.00	20.08	1.24	0.02	0.066	0.08
	LTE 48	QPSK20M	Bottom for Laptop	0	55340	1	0	1	Ant 2	w/o	-	1.00	22.00	21.15	1.22	0.13	0.158	0.19
	LTE 48	QPSK20M	Rear Face	10	55340	1	0	1	Ant 2	w/o	-	1.00	22.00	21.15	1.22	0.05	0.078	0.10
	LTE 48	QPSK20M	Left Side	0	55340	1	0	1	Ant 2	w/o	-	1.00	22.00	21.15	1.22	0	<0.001	0.00
	LTE 48	QPSK20M	Right Side	0	55340	1	0	1	Ant 2	w/o	-	1.00	22.00	21.15	1.22	0	<0.001	0.00
	LTE 48	QPSK20M	Top Side	0	55340	1	0	1	Ant 2	w/o	-	1.00	22.00	21.15	1.22	0	<0.001	0.00
	LTE 48	QPSK20M	Bottom Side	5	55340	1	0	1	Ant 2	w/o	-	1.00	22.00	21.15	1.22	0.06	0.105	0.13
	LTE 48	QPSK20M	Bottom for Laptop	0	55340	50	0	1	Ant 2	w/o	-	1.00	21.00	20.08	1.24	0.04	0.129	0.16
	LTE 48	QPSK20M	Rear Face	10	55340	50	0	1	Ant 2	w/o	-	1.00	21.00	20.08	1.24	0.03	0.06	0.07
	LTE 48	QPSK20M	Left Side	0	55340	50	0	1	Ant 2	w/o	-	1.00	21.00	20.08	1.24	0	<0.001	0.00
	LTE 48	QPSK20M	Right Side	0	55340	50	0	1	Ant 2	w/o	-	1.00	21.00	20.08	1.24	0	<0.001	0.00
	LTE 48	QPSK20M	Top Side	0	55340	50	0	1	Ant 2	w/o	-	1.00	21.00	20.08	1.24	0	<0.001	0.00
	LTE 48	QPSK20M	Bottom Side	5	55340	50	0	1	Ant 2	w/o	-	1.00	21.00	20.08	1.24	0.13	0.097	0.12
17	LTE 48	QPSK20M	Bottom for Laptop	0	55340	1	0	1	Ant 0	w/	-	1.00	19.50	19.36	1.03	-0.16	0.583	0.60
	LTE 48	QPSK20M	Rear Face	0	55340	1	0	1	Ant 0	w/	-	1.00	16.50	15.78	1.18	0.17	0.359	0.42
	LTE 48	QPSK20M	Bottom Side	0	55340	1	0	1	Ant 0	w/	-	1.00	16.50	15.78	1.18	0.19	0.325	0.38
	LTE 48	QPSK20M	Bottom for Laptop	0	55340	50	0	1	Ant 0	w/	-	1.00	18.50	18.41	1.02	0.14	0.48	0.49
	LTE 48	QPSK20M	Rear Face	0	55340	50	0	1	Ant 0	w/	-	1.00	15.50	14.72	1.20	0.13	0.312	0.37
	LTE 48	QPSK20M	Bottom Side	0	55340	50	0	1	Ant 0	w/	-	1.00	15.50	14.72	1.20	-0.07	0.211	0.25
	LTE 48	QPSK20M	Rear Face	0	55340	1	0	1	Ant 2	w/	-	1.00	13.50	13.12	1.09	-0.12	0.177	0.19
	LTE 48	QPSK20M	Bottom Side	0	55340	1	0	1	Ant 2	w/	-	1.00	13.50	13.12	1.09	-0.08	0.045	0.05
	LTE 48	QPSK20M	Rear Face	0	55340	50	0	1	Ant 2	w/	-	1.00	12.50	11.97	1.13	-0.16	0.137	0.15
	LTE 48	QPSK20M	Bottom Side	0	55340	50	0	1	Ant 2	w/	-	1.00	12.50	11.97	1.13	0.11	0.039	0.04
	LTE 48	QPSK20M	Bottom for Laptop	0	55780	1	0	1	Ant 0	w/	-	1.00	19.50	19.11	1.09	0.11	0.519	0.57
	LTE 48	QPSK20M	Bottom for Laptop	0	56210	1	0	1	Ant 0	w/	-	1.00	19.50	19.18	1.08	0.17	0.528	0.57
	LTE 48	QPSK20M	Bottom for Laptop	0	56640	1	0	1	Ant 0	w/	-	1.00	19.50	19.33	1.04	0.17	0.496	0.52
	LTE 48	QPSK20M	Bottom for Laptop	0	55340	1	0	2	Ant 0	w/	-	1.00	19.50	19.36	1.03	-0.11	0.546	0.56

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 48	QPSK20M	Bottom for Laptop	0	PCC:55340 SCC:55538	PCC:1 SCC:1	PCC:99 SCC:0	1	Ant 0	w/	-	1.00	19.50	18.04	1.40	0.03	0.366	0.51
	LTE 48 ENDC	QPSK20M	Bottom for Laptop	0	55340	1	0	1	Ant 0	w/	-	1.00	16.50	16.36	1.03	0.04	0.207	0.21
	LTE 66	QPSK20M	Bottom for Laptop	5	132072	1	0	1	Ant 0	w/o	-	1.00	24.00	22.54	1.40	-0.11	0.238	0.33
	LTE 66	QPSK20M	Rear Face	10	132072	1	0	1	Ant 0	w/o	-	1.00	24.00	22.54	1.40	0.18	0.09	0.13
	LTE 66	QPSK20M	Left Side	0	132072	1	0	1	Ant 0	w/o	-	1.00	24.00	22.54	1.40	0	<0.001	0.00
	LTE 66	QPSK20M	Right Side	0	132072	1	0	1	Ant 0	w/o	-	1.00	24.00	22.54	1.40	0	<0.001	0.00
	LTE 66	QPSK20M	Top Side	0	132072	1	0	1	Ant 0	w/o	-	1.00	24.00	22.54	1.40	0	<0.001	0.00
	LTE 66	QPSK20M	Bottom Side	5	132072	1	0	1	Ant 0	w/o	-	1.00	24.00	22.54	1.40	0.05	0.084	0.12
	LTE 66	QPSK20M	Bottom for Laptop	5	132072	50	0	1	Ant 0	w/o	-	1.00	23.00	21.61	1.38	-0.15	0.177	0.24
	LTE 66	QPSK20M	Rear Face	10	132072	50	0	1	Ant 0	w/o	-	1.00	23.00	21.61	1.38	0.18	0.068	0.09
	LTE 66	QPSK20M	Left Side	0	132072	50	0	1	Ant 0	w/o	-	1.00	23.00	21.61	1.38	0	<0.001	0.00
	LTE 66	QPSK20M	Right Side	0	132072	50	0	1	Ant 0	w/o	-	1.00	23.00	21.61	1.38	0	<0.001	0.00
	LTE 66	QPSK20M	Top Side	0	132072	50	0	1	Ant 0	w/o	-	1.00	23.00	21.61	1.38	0	<0.001	0.00
	LTE 66	QPSK20M	Bottom Side	5	132072	50	0	1	Ant 0	w/o	-	1.00	23.00	21.61	1.38	0.16	0.061	0.08
	LTE 66	QPSK20M	Bottom for Laptop	5	132072	1	0	1	Ant 2	w/o	-	1.00	24.00	22.54	1.40	-0.17	0.346	0.48
	LTE 66	QPSK20M	Rear Face	10	132072	1	0	1	Ant 2	w/o	-	1.00	24.00	22.54	1.40	-0.05	0.121	0.17
	LTE 66	QPSK20M	Left Side	0	132072	1	0	1	Ant 2	w/o	-	1.00	24.00	22.54	1.40	0	<0.001	0.00
	LTE 66	QPSK20M	Right Side	0	132072	1	0	1	Ant 2	w/o	-	1.00	24.00	22.54	1.40	0	<0.001	0.00
	LTE 66	QPSK20M	Top Side	0	132072	1	0	1	Ant 2	w/o	-	1.00	24.00	22.54	1.40	0	<0.001	0.00
	LTE 66	QPSK20M	Bottom Side	5	132072	1	0	1	Ant 2	w/o	-	1.00	24.00	22.54	1.40	0.15	0.079	0.11
	LTE 66	QPSK20M	Bottom for Laptop	5	132072	50	0	1	Ant 2	w/o	-	1.00	23.00	21.61	1.38	-0.04	0.286	0.39
	LTE 66	QPSK20M	Rear Face	10	132072	50	0	1	Ant 2	w/o	-	1.00	23.00	21.61	1.38	0.04	0.099	0.14
	LTE 66	QPSK20M	Left Side	0	132072	50	0	1	Ant 2	w/o	-	1.00	23.00	21.61	1.38	0	<0.001	0.00
	LTE 66	QPSK20M	Right Side	0	132072	50	0	1	Ant 2	w/o	-	1.00	23.00	21.61	1.38	0	<0.001	0.00
	LTE 66	QPSK20M	Top Side	0	132072	50	0	1	Ant 2	w/o	-	1.00	23.00	21.61	1.38	0	<0.001	0.00
	LTE 66	QPSK20M	Bottom Side	5	132072	50	0	1	Ant 2	w/o	-	1.00	23.00	21.61	1.38	0.04	0.057	0.08
	LTE 66	QPSK20M	Bottom for Laptop	0	132072	1	0	1	Ant 0	w/	-	1.00	18.50	17.77	1.18	-0.11	0.144	0.17
	LTE 66	QPSK20M	Rear Face	0	132072	1	0	1	Ant 0	w/	-	1.00	18.50	17.77	1.18	0.01	0.282	0.33
	LTE 66	QPSK20M	Bottom Side	0	132072	1	0	1	Ant 0	w/	-	1.00	18.50	17.77	1.18	-0.07	0.072	0.08
	LTE 66	QPSK20M	Bottom for Laptop	0	132072	50	0	1	Ant 0	w/	-	1.00	17.50	16.61	1.23	-0.13	0.101	0.12
	LTE 66	QPSK20M	Rear Face	0	132072	50	0	1	Ant 0	w/	-	1.00	17.50	16.61	1.23	-0.11	0.189	0.23
	LTE 66	QPSK20M	Bottom Side	0	132072	50	0	1	Ant 0	w/	-	1.00	17.50	16.61	1.23	-0.06	0.057	0.07
	LTE 66	QPSK20M	Bottom for Laptop	0	132072	1	0	1	Ant 2	w/	-	1.00	22.50	22.48	1.00	-0.06	0.67	0.67
	LTE 66	QPSK20M	Rear Face	0	132072	1	0	1	Ant 2	w/	-	1.00	21.00	20.51	1.12	-0.18	0.582	0.65
	LTE 66	QPSK20M	Bottom Side	0	132072	1	0	1	Ant 2	w/	-	1.00	21.00	20.51	1.12	0.14	0.189	0.21
	LTE 66	QPSK20M	Bottom for Laptop	0	132072	50	0	1	Ant 2	w/	-	1.00	21.50	21.50	1.00	-0.07	0.588	0.59
	LTE 66	QPSK20M	Rear Face	0	132072	50	0	1	Ant 2	w/	-	1.00	20.00	19.57	1.10	0.16	0.468	0.51

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 66	QPSK20M	Bottom Side	0	132072	50	0	1	Ant 2	w/	-	1.00	20.00	19.57	1.10	-0.09	0.14	0.15
	LTE 66	QPSK20M	Bottom for Laptop	0	132072	100	0	1	Ant 2	w/	-	1.00	21.50	21.48	1.00	-0.03	0.503	0.50
	LTE 66	QPSK20M	Bottom for Laptop	0	132322	1	0	1	Ant 2	w/	-	1.00	22.50	22.43	1.02	-0.03	0.817	0.83
18	LTE 66	QPSK20M	Bottom for Laptop	0	132572	1	0	1	Ant 2	w/	-	1.00	22.50	22.36	1.03	-0.04	0.99	1.02
	LTE 66	QPSK20M	Bottom for Laptop	0	132572	1	0	2	Ant 2	w/	-	1.00	22.50	22.36	1.03	0.07	0.93	0.96
	LTE 66	QPSK20M	Bottom for Laptop	0	132072	1	0	2	Ant 2	w/	-	1.00	22.50	22.48	1.00	0.05	0.629	0.63
	LTE 66	QPSK20M	Bottom for Laptop	0	132322	1	0	2	Ant 2	w/	-	1.00	22.50	22.43	1.02	-0.09	0.765	0.78
	LTE 66	QPSK20M	Bottom for Laptop	0	PCC:132072 SCC:132270	PCC:1 SCC:1	PCC:99 SCC:0	1	Ant 2	w/	-	1.00	22.50	22.18	1.08	0.04	0.583	0.63
	LTE 66 ENDC	QPSK20M	Bottom for Laptop	0	132572	1	0	1	Ant 2	w/	-	1.00	19.50	19.36	1.03	-0.12	0.255	0.26
	LTE 66	QPSK20M	Bottom for Laptop	0	132572	1	0	1	Ant 2	w/	-	1.00	22.50	22.36	1.03	0.05	0.94	0.97
	LTE 71	QPSK20M	Bottom for Laptop	5	133372	1	0	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	-0.06	0.22	0.26
	LTE 71	QPSK20M	Rear Face	10	133372	1	0	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	-0.16	0.096	0.12
	LTE 71	QPSK20M	Left Side	0	133372	1	0	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	0	<0.001	0.00
	LTE 71	QPSK20M	Right Side	0	133372	1	0	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	0	<0.001	0.00
	LTE 71	QPSK20M	Top Side	0	133372	1	0	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	0	<0.001	0.00
	LTE 71	QPSK20M	Bottom Side	5	133372	1	0	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	-0.15	0.129	0.15
	LTE 71	QPSK20M	Bottom for Laptop	5	133372	50	0	1	Ant 0	w/o	-	1.00	23.00	22.37	1.16	0.08	0.183	0.21
	LTE 71	QPSK20M	Rear Face	10	133372	50	0	1	Ant 0	w/o	-	1.00	23.00	22.37	1.16	0.05	0.199	0.23
	LTE 71	QPSK20M	Left Side	0	133372	50	0	1	Ant 0	w/o	-	1.00	23.00	22.37	1.16	0	<0.001	0.00
	LTE 71	QPSK20M	Right Side	0	133372	50	0	1	Ant 0	w/o	-	1.00	23.00	22.37	1.16	0	<0.001	0.00
	LTE 71	QPSK20M	Top Side	0	133372	50	0	1	Ant 0	w/o	-	1.00	23.00	22.37	1.16	0	<0.001	0.00
	LTE 71	QPSK20M	Bottom Side	5	133372	50	0	1	Ant 0	w/o	-	1.00	23.00	22.37	1.16	0.14	0.164	0.19
	LTE 71	QPSK20M	Bottom for Laptop	0	133372	1	0	1	Ant 0	w/	-	1.00	23.00	22.99	1.00	0.11	0.599	0.60
19	LTE 71	QPSK20M	Rear Face	0	133372	1	0	1	Ant 0	w/	-	1.00	20.50	20.23	1.06	-0.11	0.657	0.70
	LTE 71	QPSK20M	Bottom Side	0	133372	1	0	1	Ant 0	w/	-	1.00	20.50	20.23	1.06	0.12	0.301	0.32
	LTE 71	QPSK20M	Bottom for Laptop	0	133372	50	0	1	Ant 0	w/	-	1.00	22.00	21.99	1.00	0.07	0.587	0.59
	LTE 71	QPSK20M	Rear Face	0	133372	50	0	1	Ant 0	w/	-	1.00	19.50	19.26	1.06	-0.19	0.623	0.66
	LTE 71	QPSK20M	Bottom Side	0	133372	50	0	1	Ant 0	w/	-	1.00	19.50	19.26	1.06	-0.14	0.283	0.30
	LTE 71	QPSK20M	Rear Face	0	133222	1	0	1	Ant 0	w/	-	1.00	20.50	19.95	1.14	-0.05	0.47	0.54
	LTE 71	QPSK20M	Rear Face	0	133297	1	0	1	Ant 0	w/	-	1.00	20.50	20.06	1.11	0.19	0.471	0.52
	LTE 71	QPSK20M	Rear Face	0	133372	1	0	2	Ant 0	w/	-	1.00	20.50	20.23	1.06	-0.08	0.607	0.64
	LTE 71	QPSK20M	Rear Face	0	133372	1	0	1	Ant 0	w/	-	1.00	17.50	17.23	1.06	0.09	0.321	0.34

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	5	380000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.75	1.06	-0.12	0.143	0.15
	5GNR-n2	DFT-S QPSK20M	Rear Face	10	380000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.75	1.06	0.18	0.106	0.11
	5GNR-n2	DFT-S QPSK20M	Left Side	0	380000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.75	1.06	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Right Side	0	380000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.75	1.06	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Top Side	0	380000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.75	1.06	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Bottom Side	5	380000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.75	1.06	0.17	0.045	0.05
	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	5	380000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.68	1.08	0.13	0.139	0.15
	5GNR-n2	DFT-S QPSK20M	Rear Face	10	380000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.68	1.08	-0.11	0.095	0.10
	5GNR-n2	DFT-S QPSK20M	Left Side	0	380000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.68	1.08	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Right Side	0	380000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.68	1.08	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Top Side	0	380000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.68	1.08	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Bottom Side	5	380000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.68	1.08	-0.17	0.033	0.04
	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	5	380000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.75	1.06	0.15	0.454	0.48
	5GNR-n2	DFT-S QPSK20M	Rear Face	10	380000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.75	1.06	-0.04	0.314	0.33
	5GNR-n2	DFT-S QPSK20M	Left Side	0	380000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.75	1.06	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Right Side	0	380000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.75	1.06	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Top Side	0	380000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.75	1.06	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Bottom Side	5	380000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.75	1.06	0.01	0.258	0.27
	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	5	380000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.68	1.08	-0.14	0.413	0.45
	5GNR-n2	DFT-S QPSK20M	Rear Face	10	380000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.68	1.08	0.16	0.307	0.33
	5GNR-n2	DFT-S QPSK20M	Left Side	0	380000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.68	1.08	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Right Side	0	380000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.68	1.08	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Top Side	0	380000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.68	1.08	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Bottom Side	5	380000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.68	1.08	-0.17	0.244	0.26
	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	0	380000	1	1	1	Ant 0	w/	-	1.00	17.50	17.45	1.01	0.15	0.168	0.17
	5GNR-n2	DFT-S QPSK20M	Rear Face	0	380000	1	1	1	Ant 0	w/	-	1.00	14.50	14.47	1.01	-0.14	0.187	0.19
	5GNR-n2	DFT-S QPSK20M	Bottom Side	0	380000	1	1	1	Ant 0	w/	-	1.00	14.50	14.47	1.01	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	0	380000	50	28	1	Ant 0	w/	-	1.00	17.50	17.40	1.02	-0.12	0.167	0.17
	5GNR-n2	DFT-S QPSK20M	Rear Face	0	380000	50	28	1	Ant 0	w/	-	1.00	14.50	14.40	1.02	0.18	0.184	0.19
	5GNR-n2	DFT-S QPSK20M	Bottom Side	0	380000	50	28	1	Ant 0	w/	-	1.00	14.50	14.40	1.02	0	<0.001	0.00
	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	0	380000	1	1	1	Ant 2	w/	-	1.00	19.00	18.99	1.00	0.05	0.458	0.46
	5GNR-n2	DFT-S QPSK20M	Rear Face	0	380000	1	1	1	Ant 2	w/	-	1.00	17.00	16.99	1.00	0.06	0.444	0.44
	5GNR-n2	DFT-S QPSK20M	Bottom Side	0	380000	1	1	1	Ant 2	w/	-	1.00	17.00	16.99	1.00	0.19	0.164	0.16
	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	0	380000	50	28	1	Ant 2	w/	-	1.00	19.00	18.89	1.03	-0.14	0.454	0.47
	5GNR-n2	DFT-S QPSK20M	Rear Face	0	380000	50	28	1	Ant 2	w/	-	1.00	17.00	16.92	1.02	0.13	0.463	0.47
	5GNR-n2	DFT-S QPSK20M	Bottom Side	0	380000	50	28	1	Ant 2	w/	-	1.00	17.00	16.92	1.02	0.01	0.163	0.17
20	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	5	372000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.63	1.09	0.04	0.512	0.56
	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	5	376000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.68	1.08	-0.01	0.389	0.42
	5GNR-n2	DFT-S QPSK20M	Bottom for Laptop	5	372000	1	1	2	Ant 2	w/o	-	1.00	24.00	23.63	1.09	-0.19	0.437	0.48

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n2 ENDC	DFT-S QPSK20M	Bottom for Laptop	5	372000	1	1	1	Ant 2	w/o	-	1.00	21.00	20.63	1.09	0.02	0.159	0.17
	5GNR-n5	DFT-S QPSK20M	Bottom for Laptop	5	167300	1	1	1	Ant 0	w/o	-	1.00	24.00	22.56	1.39	0.19	0.348	0.48
	5GNR-n5	DFT-S QPSK20M	Rear Face	10	167300	1	1	1	Ant 0	w/o	-	1.00	24.00	22.56	1.39	-0.04	0.258	0.36
	5GNR-n5	DFT-S QPSK20M	Left Side	0	167300	1	1	1	Ant 0	w/o	-	1.00	24.00	22.56	1.39	0	<0.001	0.00
	5GNR-n5	DFT-S QPSK20M	Right Side	0	167300	1	1	1	Ant 0	w/o	-	1.00	24.00	22.56	1.39	0	<0.001	0.00
	5GNR-n5	DFT-S QPSK20M	Top Side	0	167300	1	1	1	Ant 0	w/o	-	1.00	24.00	22.56	1.39	0	<0.001	0.00
	5GNR-n5	DFT-S QPSK20M	Bottom Side	5	167300	1	1	1	Ant 0	w/o	-	1.00	24.00	22.56	1.39	0.16	0.242	0.34
	5GNR-n5	DFT-S QPSK20M	Bottom for Laptop	5	167300	50	28	1	Ant 0	w/o	-	1.00	24.00	22.48	1.42	-0.07	0.341	0.48
	5GNR-n5	DFT-S QPSK20M	Rear Face	10	167300	50	28	1	Ant 0	w/o	-	1.00	24.00	22.48	1.42	0.03	0.255	0.36
	5GNR-n5	DFT-S QPSK20M	Left Side	0	167300	50	28	1	Ant 0	w/o	-	1.00	24.00	22.48	1.42	0	<0.001	0.00
	5GNR-n5	DFT-S QPSK20M	Right Side	0	167300	50	28	1	Ant 0	w/o	-	1.00	24.00	22.48	1.42	0	<0.001	0.00
	5GNR-n5	DFT-S QPSK20M	Top Side	0	167300	50	28	1	Ant 0	w/o	-	1.00	24.00	22.48	1.42	0	<0.001	0.00
	5GNR-n5	DFT-S QPSK20M	Bottom Side	5	167300	50	28	1	Ant 0	w/o	-	1.00	24.00	22.48	1.42	0.18	0.227	0.32
	5GNR-n5	DFT-S QPSK20M	Bottom for Laptop	0	167300	1	1	1	Ant 0	w/	-	1.00	21.50	21.49	1.00	0.03	0.456	0.46
	5GNR-n5	DFT-S QPSK20M	Rear Face	0	167300	1	1	1	Ant 0	w/	-	1.00	18.00	17.79	1.05	0.01	0.367	0.39
	5GNR-n5	DFT-S QPSK20M	Bottom Side	0	167300	1	1	1	Ant 0	w/	-	1.00	18.00	17.79	1.05	0.15	0.162	0.17
	5GNR-n5	DFT-S QPSK20M	Bottom for Laptop	0	167300	50	28	1	Ant 0	w/	-	1.00	21.50	21.41	1.02	0.01	0.439	0.45
	5GNR-n5	DFT-S QPSK20M	Rear Face	0	167300	50	28	1	Ant 0	w/	-	1.00	18.00	17.71	1.07	0.11	0.364	0.39
	5GNR-n5	DFT-S QPSK20M	Bottom Side	0	167300	50	28	1	Ant 0	w/	-	1.00	18.00	17.71	1.07	-0.02	0.154	0.16
21	5GNR-n5	DFT-S QPSK20M	Bottom for Laptop	5	166800	1	1	1	Ant 0	w/o	-	1.00	24.00	22.45	1.43	-0.06	0.351	0.50
	5GNR-n5	DFT-S QPSK20M	Bottom for Laptop	5	167800	1	1	1	Ant 0	w/o	-	1.00	24.00	22.37	1.46	0.12	0.332	0.48
	5GNR-n5	DFT-S QPSK20M	Bottom for Laptop	5	166800	1	1	2	Ant 0	w/o	-	1.00	24.00	22.45	1.43	0.08	0.338	0.48
	5GNR-n5 ENDC	DFT-S QPSK20M	Bottom for Laptop	5	166800	1	1	1	Ant 0	w/o	-	1.00	21.00	19.45	1.43	0.06	0.083	0.12
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	5	512000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.44	1.14	0.11	0.198	0.23
	5GNR-n7	DFT-S QPSK20M	Rear Face	10	512000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.44	1.14	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Left Side	0	512000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.44	1.14	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Right Side	0	512000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.44	1.14	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Top Side	0	512000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.44	1.14	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Bottom Side	5	512000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.44	1.14	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	5	512000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.32	1.17	0.09	0.184	0.22
	5GNR-n7	DFT-S QPSK20M	Rear Face	10	512000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.32	1.17	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Left Side	0	512000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.32	1.17	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Right Side	0	512000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.32	1.17	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Top Side	0	512000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.32	1.17	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Bottom Side	5	512000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.32	1.17	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	5	512000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.44	1.14	0.08	0.632	0.72
	5GNR-n7	DFT-S QPSK20M	Rear Face	10	512000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.44	1.14	0.05	0.299	0.34

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n7	DFT-S QPSK20M	Left Side	0	512000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.44	1.14	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Right Side	0	512000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.44	1.14	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Top Side	0	512000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.44	1.14	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Bottom Side	5	512000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.44	1.14	-0.09	0.327	0.37
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	5	512000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.32	1.17	0.06	0.63	0.74
	5GNR-n7	DFT-S QPSK20M	Rear Face	10	512000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.32	1.17	-0.02	0.291	0.34
	5GNR-n7	DFT-S QPSK20M	Left Side	0	512000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.32	1.17	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Right Side	0	512000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.32	1.17	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Top Side	0	512000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.32	1.17	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Bottom Side	5	512000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.32	1.17	0.16	0.311	0.36
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	0	512000	1	1	1	Ant 0	w/	-	1.00	16.50	16.18	1.08	0.13	0.245	0.26
	5GNR-n7	DFT-S QPSK20M	Rear Face	0	512000	1	1	1	Ant 0	w/	-	1.00	12.50	12.49	1.00	-0.17	0.04	0.04
	5GNR-n7	DFT-S QPSK20M	Bottom Side	0	512000	1	1	1	Ant 0	w/	-	1.00	12.50	12.49	1.00	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	0	512000	50	28	1	Ant 0	w/	-	1.00	16.50	16.06	1.11	-0.05	0.233	0.26
	5GNR-n7	DFT-S QPSK20M	Rear Face	0	512000	50	28	1	Ant 0	w/	-	1.00	12.50	12.36	1.03	0.02	0.038	0.04
	5GNR-n7	DFT-S QPSK20M	Bottom Side	0	512000	50	28	1	Ant 0	w/	-	1.00	12.50	12.36	1.03	0	<0.001	0.00
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	0	512000	1	1	1	Ant 2	w/	-	1.00	19.50	19.42	1.02	-0.06	0.741	0.76
	5GNR-n7	DFT-S QPSK20M	Rear Face	0	512000	1	1	1	Ant 2	w/	-	1.00	19.00	18.97	1.01	-0.08	0.659	0.67
	5GNR-n7	DFT-S QPSK20M	Bottom Side	0	512000	1	1	1	Ant 2	w/	-	1.00	19.00	18.97	1.01	-0.15	0.235	0.24
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	0	512000	50	28	1	Ant 2	w/	-	1.00	19.50	19.38	1.03	0.07	0.733	0.75
	5GNR-n7	DFT-S QPSK20M	Rear Face	0	512000	50	28	1	Ant 2	w/	-	1.00	19.00	18.95	1.01	0.18	0.653	0.66
	5GNR-n7	DFT-S QPSK20M	Bottom Side	0	512000	50	28	1	Ant 2	w/	-	1.00	19.00	18.95	1.01	0.03	0.224	0.23
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	0	512000	100	0	1	Ant 2	w/	-	1.00	18.50	18.35	1.04	0.07	0.672	0.70
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	0	502000	1	1	1	Ant 2	w/	-	1.00	19.50	18.89	1.15	-0.07	0.642	0.74
22	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	0	507000	1	1	1	Ant 2	w/	-	1.00	19.50	18.96	1.13	0.02	0.734	0.83
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	0	507000	1	1	2	Ant 2	w/	-	1.00	19.50	18.96	1.13	0.04	0.667	0.75
	5GNR-n7	DFT-S QPSK20M	Bottom for Laptop	0	507000	1	1	1	Ant 2	w/	-	1.00	16.50	15.96	1.13	0.04	0.354	0.40

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	381000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	-0.07	0.27	0.33
	5GNR-n25	DFT-S QPSK20M	Rear Face	10	381000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	0.09	0.165	0.20
	5GNR-n25	DFT-S QPSK20M	Left Side	0	381000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Right Side	0	381000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Top Side	0	381000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Bottom Side	5	381000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.11	1.23	0.11	0.104	0.13
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	381000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.06	1.24	0.02	0.257	0.32
	5GNR-n25	DFT-S QPSK20M	Rear Face	10	381000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.06	1.24	-0.16	0.164	0.20
	5GNR-n25	DFT-S QPSK20M	Left Side	0	381000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.06	1.24	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Right Side	0	381000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.06	1.24	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Top Side	0	381000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.06	1.24	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Bottom Side	5	381000	50	28	1	Ant 0	w/o	-	1.00	24.00	23.06	1.24	0.07	0.1	0.12
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	381000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.11	1.23	0.05	0.691	0.85
	5GNR-n25	DFT-S QPSK20M	Rear Face	10	381000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.11	1.23	-0.07	0.497	0.61
	5GNR-n25	DFT-S QPSK20M	Left Side	0	381000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.11	1.23	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Right Side	0	381000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.11	1.23	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Top Side	0	381000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.11	1.23	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Bottom Side	5	381000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.11	1.23	-0.18	0.393	0.48
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	381000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.06	1.24	0.04	0.682	0.85
	5GNR-n25	DFT-S QPSK20M	Rear Face	10	381000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.06	1.24	-0.03	0.485	0.60
	5GNR-n25	DFT-S QPSK20M	Left Side	0	381000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.06	1.24	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Right Side	0	381000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.06	1.24	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Top Side	0	381000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.06	1.24	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Bottom Side	5	381000	50	28	1	Ant 2	w/o	-	1.00	24.00	23.06	1.24	0.15	0.384	0.48
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	381000	100	0	1	Ant 2	w/o	-	1.00	23.00	22.03	1.25	0.11	0.579	0.72
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	0	381000	1	1	1	Ant 0	w/	-	1.00	17.50	17.11	1.09	-0.02	0.228	0.25
	5GNR-n25	DFT-S QPSK20M	Rear Face	0	381000	1	1	1	Ant 0	w/	-	1.00	13.50	13.14	1.09	-0.17	0.174	0.19
	5GNR-n25	DFT-S QPSK20M	Bottom Side	0	381000	1	1	1	Ant 0	w/	-	1.00	13.50	13.14	1.09	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	0	381000	50	28	1	Ant 0	w/	-	1.00	17.50	17.06	1.11	-0.05	0.212	0.24
	5GNR-n25	DFT-S QPSK20M	Rear Face	0	381000	50	28	1	Ant 0	w/	-	1.00	13.50	13.09	1.10	0.16	0.164	0.18
	5GNR-n25	DFT-S QPSK20M	Bottom Side	0	381000	50	28	1	Ant 0	w/	-	1.00	13.50	13.09	1.10	0	<0.001	0.00
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	0	381000	1	1	1	Ant 2	w/	-	1.00	19.00	18.99	1.00	-0.03	0.57	0.57
	5GNR-n25	DFT-S QPSK20M	Rear Face	0	381000	1	1	1	Ant 2	w/	-	1.00	17.50	17.21	1.07	-0.08	0.66	0.71
	5GNR-n25	DFT-S QPSK20M	Bottom Side	0	381000	1	1	1	Ant 2	w/	-	1.00	17.50	17.21	1.07	0.13	0.212	0.23
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	0	381000	50	28	1	Ant 2	w/	-	1.00	19.00	18.91	1.02	0.03	0.566	0.58
	5GNR-n25	DFT-S QPSK20M	Rear Face	0	381000	50	28	1	Ant 2	w/	-	1.00	17.50	17.16	1.08	-0.18	0.649	0.70
	5GNR-n25	DFT-S QPSK20M	Bottom Side	0	381000	50	28	1	Ant 2	w/	-	1.00	17.50	17.16	1.08	0.09	0.2	0.22
23	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	372000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.59	1.38	0.03	0.698	0.96
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	376500	1	1	1	Ant 2	w/o	-	1.00	24.00	22.69	1.35	0.13	0.669	0.90

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	372000	50	28	1	Ant 2	w/o	-	1.00	24.00	22.56	1.39	-0.06	0.686	0.95
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	376500	50	28	1	Ant 2	w/o	-	1.00	24.00	22.62	1.37	0.19	0.661	0.91
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	372000	1	1	2	Ant 2	w/o	-	1.00	24.00	22.59	1.38	0.09	0.671	0.93
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	376500	1	1	2	Ant 2	w/o	-	1.00	24.00	22.69	1.35	0.05	0.643	0.87
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	381000	1	1	2	Ant 2	w/o	-	1.00	24.00	23.11	1.23	-0.02	0.664	0.82
	5GNR-n25	DFT-S QPSK20M	Bottom for Laptop	5	372000	1	1	1	Ant 2	w/o	-	1.00	21.00	19.59	1.38	0.05	0.343	0.47
	5GNR-n30	DFT-S QPSK10M	Bottom for Laptop	5	462000	1	1	1	Ant 0	w/o	-	1.00	23.00	21.49	1.42	-0.19	0.103	0.15
	5GNR-n30	DFT-S QPSK10M	Rear Face	10	462000	1	1	1	Ant 0	w/o	-	1.00	23.00	21.49	1.42	-0.16	0.047	0.07
	5GNR-n30	DFT-S QPSK10M	Left Side	0	462000	1	1	1	Ant 0	w/o	-	1.00	23.00	21.49	1.42	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Right Side	0	462000	1	1	1	Ant 0	w/o	-	1.00	23.00	21.49	1.42	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Top Side	0	462000	1	1	1	Ant 0	w/o	-	1.00	23.00	21.49	1.42	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Bottom Side	5	462000	1	1	1	Ant 0	w/o	-	1.00	23.00	21.49	1.42	-0.06	0.042	0.06
	5GNR-n30	DFT-S QPSK10M	Bottom for Laptop	5	462000	25	14	1	Ant 0	w/o	-	1.00	23.00	21.46	1.43	0.17	0.1	0.14
	5GNR-n30	DFT-S QPSK10M	Rear Face	10	462000	25	14	1	Ant 0	w/o	-	1.00	23.00	21.46	1.43	0.19	0.047	0.07
	5GNR-n30	DFT-S QPSK10M	Left Side	0	462000	25	14	1	Ant 0	w/o	-	1.00	23.00	21.46	1.43	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Right Side	0	462000	25	14	1	Ant 0	w/o	-	1.00	23.00	21.46	1.43	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Top Side	0	462000	25	14	1	Ant 0	w/o	-	1.00	23.00	21.46	1.43	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Bottom Side	5	462000	25	14	1	Ant 0	w/o	-	1.00	23.00	21.46	1.43	0.08	0.04	0.06
	5GNR-n30	DFT-S QPSK10M	Bottom for Laptop	5	462000	1	1	1	Ant 2	w/o	-	1.00	23.00	21.49	1.42	0.17	0.169	0.24
	5GNR-n30	DFT-S QPSK10M	Rear Face	10	462000	1	1	1	Ant 2	w/o	-	1.00	23.00	21.49	1.42	-0.14	0.045	0.06
	5GNR-n30	DFT-S QPSK10M	Left Side	0	462000	1	1	1	Ant 2	w/o	-	1.00	23.00	21.49	1.42	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Right Side	0	462000	1	1	1	Ant 2	w/o	-	1.00	23.00	21.49	1.42	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Top Side	0	462000	1	1	1	Ant 2	w/o	-	1.00	23.00	21.49	1.42	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Bottom Side	5	462000	1	1	1	Ant 2	w/o	-	1.00	23.00	21.49	1.42	0.13	0.107	0.15
	5GNR-n30	DFT-S QPSK10M	Bottom for Laptop	5	462000	25	14	1	Ant 2	w/o	-	1.00	23.00	21.46	1.43	-0.08	0.164	0.23
	5GNR-n30	DFT-S QPSK10M	Rear Face	10	462000	25	14	1	Ant 2	w/o	-	1.00	23.00	21.46	1.43	0.11	0.046	0.07
	5GNR-n30	DFT-S QPSK10M	Left Side	0	462000	25	14	1	Ant 2	w/o	-	1.00	23.00	21.46	1.43	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Right Side	0	462000	25	14	1	Ant 2	w/o	-	1.00	23.00	21.46	1.43	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Top Side	0	462000	25	14	1	Ant 2	w/o	-	1.00	23.00	21.46	1.43	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Bottom Side	5	462000	25	14	1	Ant 2	w/o	-	1.00	23.00	21.46	1.43	-0.11	0.089	0.13
	5GNR-n30	DFT-S QPSK10M	Bottom for Laptop	0	462000	1	1	1	Ant 0	w/	-	1.00	17.00	16.92	1.02	0.19	0.098	0.10
	5GNR-n30	DFT-S QPSK10M	Rear Face	0	462000	1	1	1	Ant 0	w/	-	1.00	13.00	12.98	1.00	-0.02	0.032	0.03
	5GNR-n30	DFT-S QPSK10M	Bottom Side	0	462000	1	1	1	Ant 0	w/	-	1.00	13.00	12.98	1.00	0	<0.001	0.00
	5GNR-n30	DFT-S QPSK10M	Bottom for Laptop	0	462000	25	14	1	Ant 0	w/	-	1.00	17.00	16.89	1.03	-0.09	0.094	0.10
	5GNR-n30	DFT-S QPSK10M	Rear Face	0	462000	25	14	1	Ant 0	w/	-	1.00	13.00	12.87	1.03	0.07	0.037	0.04
	5GNR-n30	DFT-S QPSK10M	Bottom Side	0	462000	25	14	1	Ant 0	w/	-	1.00	13.00	12.87	1.03	0	<0.001	0.00
24	5GNR-n30	DFT-S QPSK10M	Bottom for Laptop	0	462000	1	1	1	Ant 2	w/	-	1.00	22.00	21.78	1.05	0.02	0.554	0.58
	5GNR-n30	DFT-S QPSK10M	Rear Face	0	462000	1	1	1	Ant 2	w/	-	1.00	22.00	21.78	1.05	0.18	0.464	0.49

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n30	DFT-S QPSK10M	Bottom Side	0	462000	1	1	1	Ant 2	w/	-	1.00	22.00	21.78	1.05	-0.16	0.262	0.28
	5GNR-n30	DFT-S QPSK10M	Bottom for Laptop	0	462000	25	14	1	Ant 2	w/	-	1.00	22.00	21.76	1.06	-0.09	0.541	0.57
	5GNR-n30	DFT-S QPSK10M	Rear Face	0	462000	25	14	1	Ant 2	w/	-	1.00	22.00	21.76	1.06	0.12	0.38	0.40
	5GNR-n30	DFT-S QPSK10M	Bottom Side	0	462000	25	14	1	Ant 2	w/	-	1.00	22.00	21.76	1.06	-0.13	0.234	0.25
	5GNR-n30	DFT-S QPSK10M	Bottom for Laptop	0	462000	1	1	2	Ant 2	w/	-	1.00	22.00	21.78	1.05	-0.15	0.539	0.57
	5GNR-n30	DFT-S QPSK10M	Bottom for Laptop	0	462000	1	1	1	Ant 2	w/	-	1.00	19.00	18.78	1.05	0.03	0.272	0.29
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	516000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.63	1.37	0.18	0.289	0.40
	5GNR-n38	DFT-S QPSK20M	Rear Face	10	516000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.63	1.37	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Left Side	0	516000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.63	1.37	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Right Side	0	516000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.63	1.37	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Top Side	0	516000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.63	1.37	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Bottom Side	5	516000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.63	1.37	-0.11	0.058	0.08
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	516000	25	13	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	0.13	0.274	0.38
	5GNR-n38	DFT-S QPSK20M	Rear Face	10	516000	25	13	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Left Side	0	516000	25	13	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Right Side	0	516000	25	13	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Top Side	0	516000	25	13	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Bottom Side	5	516000	25	13	1	Ant 0	w/o	-	1.00	24.00	22.58	1.39	-0.09	0.062	0.09
25	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	516000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.63	1.37	0.04	0.715	0.98
	5GNR-n38	DFT-S QPSK20M	Rear Face	10	516000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.63	1.37	-0.15	0.382	0.52
	5GNR-n38	DFT-S QPSK20M	Left Side	0	516000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.63	1.37	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Right Side	0	516000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.63	1.37	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Top Side	0	516000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.63	1.37	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Bottom Side	5	516000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.63	1.37	-0.15	0.377	0.52
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	516000	25	13	1	Ant 2	w/o	-	1.00	24.00	22.58	1.39	0.16	0.646	0.90
	5GNR-n38	DFT-S QPSK20M	Rear Face	10	516000	25	13	1	Ant 2	w/o	-	1.00	24.00	22.58	1.39	-0.19	0.373	0.52
	5GNR-n38	DFT-S QPSK20M	Left Side	0	516000	25	13	1	Ant 2	w/o	-	1.00	24.00	22.58	1.39	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Right Side	0	516000	25	13	1	Ant 2	w/o	-	1.00	24.00	22.58	1.39	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Top Side	0	516000	25	13	1	Ant 2	w/o	-	1.00	24.00	22.58	1.39	0	<0.001	0.00
	5GNR-n38	DFT-S QPSK20M	Bottom Side	5	516000	25	13	1	Ant 2	w/o	-	1.00	24.00	22.58	1.39	0.05	0.422	0.59
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	516000	50	0	1	Ant 2	w/o	-	1.00	23.00	21.56	1.39	-0.09	0.57	0.79
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	0	516000	1	1	1	Ant 0	w/	-	1.00	17.50	17.47	1.01	0.01	0.629	0.64
	5GNR-n38	DFT-S QPSK20M	Rear Face	0	516000	1	1	1	Ant 0	w/	-	1.00	14.50	14.41	1.02	-0.01	0.061	0.06
	5GNR-n38	DFT-S QPSK20M	Bottom Side	0	516000	1	1	1	Ant 0	w/	-	1.00	14.50	14.41	1.02	0.17	0.062	0.06
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	0	516000	25	13	1	Ant 0	w/	-	1.00	17.50	17.41	1.02	-0.07	0.448	0.46
	5GNR-n38	DFT-S QPSK20M	Rear Face	0	516000	25	13	1	Ant 0	w/	-	1.00	14.50	14.38	1.03	0.19	0.069	0.07
	5GNR-n38	DFT-S QPSK20M	Bottom Side	0	516000	25	13	1	Ant 0	w/	-	1.00	14.50	14.38	1.03	0.12	0.06	0.06
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	0	516000	1	1	1	Ant 2	w/	-	1.00	19.50	19.45	1.01	-0.08	0.834	0.84

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n38	DFT-S QPSK20M	Rear Face	0	516000	1	1	1	Ant 2	w/	-	1.00	18.00	17.49	1.12	-0.15	0.586	0.66
	5GNR-n38	DFT-S QPSK20M	Bottom Side	0	516000	1	1	1	Ant 2	w/	-	1.00	18.00	17.49	1.12	-0.15	0.251	0.28
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	0	516000	25	13	1	Ant 2	w/	-	1.00	19.50	19.42	1.02	-0.11	0.779	0.79
	5GNR-n38	DFT-S QPSK20M	Rear Face	0	516000	25	13	1	Ant 2	w/	-	1.00	18.00	17.44	1.14	-0.13	0.549	0.63
	5GNR-n38	DFT-S QPSK20M	Bottom Side	0	516000	25	13	1	Ant 2	w/	-	1.00	18.00	17.44	1.14	0.06	0.229	0.26
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	0	516000	50	0	1	Ant 2	w/	-	1.00	18.50	18.35	1.04	0.05	0.707	0.74
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	519000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.55	1.40	-0.19	0.667	0.93
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	522000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.57	1.39	-0.16	0.401	0.56
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	519000	25	13	1	Ant 2	w/o	-	1.00	24.00	22.51	1.41	-0.06	0.603	0.85
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	522000	25	13	1	Ant 2	w/o	-	1.00	24.00	22.52	1.41	0.04	0.363	0.51
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	0	519000	1	1	1	Ant 2	w/	-	1.00	19.50	19.32	1.04	0.02	0.783	0.81
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	0	522000	1	1	1	Ant 2	w/	-	1.00	19.50	19.37	1.03	-0.05	0.479	0.49
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	516000	1	1	2	Ant 2	w/o	-	1.00	24.00	22.63	1.37	0.07	0.673	0.92
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	519000	1	1	2	Ant 2	w/o	-	1.00	24.00	22.55	1.40	0.05	0.627	0.88
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	522000	1	1	2	Ant 2	w/o	-	1.00	24.00	22.57	1.39	-0.04	0.378	0.53
	5GNR-n38	DFT-S QPSK20M	Bottom for Laptop	5	516000	1	1	1	Ant 2	w/o	-	1.00	21.00	19.63	1.37	0.09	0.351	0.48

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	5	509304	1	1	1	Ant 0	w/o	-	1.00	27.00	25.14	1.53	0.14	0.027	0.04
	5GNR-n41	DFT-S QPSK80M	Rear Face	10	509304	1	1	1	Ant 0	w/o	-	1.00	27.00	25.14	1.53	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Left Side	0	509304	1	1	1	Ant 0	w/o	-	1.00	27.00	25.14	1.53	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Right Side	0	509304	1	1	1	Ant 0	w/o	-	1.00	27.00	25.14	1.53	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Top Side	0	509304	1	1	1	Ant 0	w/o	-	1.00	27.00	25.14	1.53	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Bottom Side	5	509304	1	1	1	Ant 0	w/o	-	1.00	27.00	25.14	1.53	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	5	509304	108	55	1	Ant 0	w/o	-	1.00	27.00	25.09	1.55	0.15	0.024	0.04
	5GNR-n41	DFT-S QPSK80M	Rear Face	10	509304	108	55	1	Ant 0	w/o	-	1.00	27.00	25.09	1.55	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Left Side		509304	108	55	1	Ant 0	w/o	-	1.00	27.00	25.09	1.55	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Right Side	0	509304	108	55	1	Ant 0	w/o	-	1.00	27.00	25.09	1.55	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Top Side	0	509304	108	55	1	Ant 0	w/o	-	1.00	27.00	25.09	1.55	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Bottom Side	5	509304	108	55	1	Ant 0	w/o	-	1.00	27.00	25.09	1.55	0.09	0.022	0.03
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	5	509304	1	1	1	Ant 2	w/o	-	1.00	27.00	25.14	1.53	-0.19	0.163	0.25
	5GNR-n41	DFT-S QPSK80M	Rear Face	10	509304	1	1	1	Ant 2	w/o	-	1.00	27.00	25.14	1.53	0.17	0.069	0.11
	5GNR-n41	DFT-S QPSK80M	Left Side	0	509304	1	1	1	Ant 2	w/o	-	1.00	27.00	25.14	1.53	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Right Side	0	509304	1	1	1	Ant 2	w/o	-	1.00	27.00	25.14	1.53	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Top Side	0	509304	1	1	1	Ant 2	w/o	-	1.00	27.00	25.14	1.53	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Bottom Side	5	509304	1	1	1	Ant 2	w/o	-	1.00	27.00	25.14	1.53	0.05	0.064	0.10
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	5	509304	108	55	1	Ant 2	w/o	-	1.00	27.00	25.09	1.55	0.04	0.157	0.24
	5GNR-n41	DFT-S QPSK80M	Rear Face	10	509304	108	55	1	Ant 2	w/o	-	1.00	27.00	25.09	1.55	0.17	0.068	0.11
	5GNR-n41	DFT-S QPSK80M	Left Side	0	509304	108	55	1	Ant 2	w/o	-	1.00	27.00	25.09	1.55	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Right Side	0	509304	108	55	1	Ant 2	w/o	-	1.00	27.00	25.09	1.55	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Top Side	0	509304	108	55	1	Ant 2	w/o	-	1.00	27.00	25.09	1.55	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Bottom Side	5	509304	108	55	1	Ant 2	w/o	-	1.00	27.00	25.09	1.55	0.15	0.058	0.09
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	0	509304	1	1	1	Ant 0	w/	-	1.00	19.50	18.92	1.14	0.19	0.03	0.03
	5GNR-n41	DFT-S QPSK80M	Rear Face	0	509304	1	1	1	Ant 0	w/	-	1.00	16.00	15.97	1.01	0.02	0.009	0.01
	5GNR-n41	DFT-S QPSK80M	Bottom Side	0	509304	1	1	1	Ant 0	w/	-	1.00	16.00	15.97	1.01	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	0	509304	108	55	1	Ant 0	w/	-	1.00	19.50	18.87	1.16	-0.02	0.024	0.03
	5GNR-n41	DFT-S QPSK80M	Rear Face	0	509304	108	55	1	Ant 0	w/	-	1.00	16.00	15.88	1.03	0	<0.001	0.00
	5GNR-n41	DFT-S QPSK80M	Bottom Side	0	509304	108	55	1	Ant 0	w/	-	1.00	16.00	15.88	1.03	0	<0.001	0.00
27	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	0	509304	1	1	1	Ant 2	w/	-	1.00	25.00	24.95	1.01	-0.03	0.536	0.54
	5GNR-n41	DFT-S QPSK80M	Rear Face	0	509304	1	1	1	Ant 2	w/	-	1.00	24.50	23.97	1.13	0.02	0.389	0.44
	5GNR-n41	DFT-S QPSK80M	Bottom Side	0	509304	1	1	1	Ant 2	w/	-	1.00	24.50	23.97	1.13	0.03	0.104	0.12
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	0	509304	108	55	1	Ant 2	w/	-	1.00	25.00	24.93	1.02	-0.07	0.524	0.53
	5GNR-n41	DFT-S QPSK80M	Rear Face	0	509304	108	55	1	Ant 2	w/	-	1.00	24.50	23.89	1.15	-0.11	0.387	0.45
	5GNR-n41	DFT-S QPSK80M	Bottom Side	0	509304	108	55	1	Ant 2	w/	-	1.00	24.50	23.89	1.15	0.04	0.092	0.11
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	0	507204	1	1	1	Ant 2	w/	-	1.00	25.00	24.71	1.07	-0.15	0.466	0.50
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	0	518598	1	1	1	Ant 2	w/	-	1.00	25.00	24.77	1.05	0.11	0.466	0.49
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	0	500298	1	1	1	Ant 2	w/	-	1.00	25.00	24.93	1.02	0.08	0.277	0.28

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	0	529998	1	1	1	Ant 2	w/	-	1.00	25.00	24.86	1.03	0.05	0.275	0.28
	5GNR-n41	DFT-S QPSK80M	Bottom for Laptop	0	509304	1	1	2	Ant 2	w/	-	1.00	25.00	24.95	1.01	0.19	0.518	0.52
	5GNR-n41 ENDC	DFT-S QPSK80M	Bottom for Laptop	0	509304	1	1	1	Ant 2	w/	-	1.00	22.00	21.95	1.01	0.09	0.182	0.18
	5GNR-n48	DFT-S QPSK100M	Bottom for Laptop	5	641110	1	1	1	Ant 0	w/o	-	1.00	22.00	21.55	1.11	-0.11	0.525	0.58
	5GNR-n48	DFT-S QPSK100M	Rear Face	10	641110	1	1	1	Ant 0	w/o	-	1.00	22.00	21.55	1.11	-0.02	0.386	0.43
	5GNR-n48	DFT-S QPSK100M	Left Side	0	641110	1	1	1	Ant 0	w/o	-	1.00	22.00	21.55	1.11	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Right Side	0	641110	1	1	1	Ant 0	w/o	-	1.00	22.00	21.55	1.11	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Top Side	0	641110	1	1	1	Ant 0	w/o	-	1.00	22.00	21.55	1.11	0	<0.001	0.00
28	5GNR-n48	DFT-S QPSK100M	Bottom Side	5	641110	1	1	1	Ant 0	w/o	-	1.00	22.00	21.55	1.11	-0.05	0.702	0.78
	5GNR-n48	DFT-S QPSK100M	Bottom for Laptop	5	641110	135	69	1	Ant 0	w/o	-	1.00	22.00	21.52	1.12	-0.01	0.523	0.59
	5GNR-n48	DFT-S QPSK100M	Rear Face	10	641110	135	69	1	Ant 0	w/o	-	1.00	22.00	21.52	1.12	-0.07	0.385	0.43
	5GNR-n48	DFT-S QPSK100M	Left Side	0	641110	135	69	1	Ant 0	w/o	-	1.00	22.00	21.52	1.12	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Right Side	0	641110	135	69	1	Ant 0	w/o	-	1.00	22.00	21.52	1.12	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Top Side	0	641110	135	69	1	Ant 0	w/o	-	1.00	22.00	21.52	1.12	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Bottom Side	5	641110	135	69	1	Ant 0	w/o	-	1.00	22.00	21.52	1.12	-0.07	0.604	0.68
	5GNR-n48	DFT-S QPSK100M	Bottom for Laptop	5	641110	1	1	1	Ant 2	w/o	-	1.00	22.00	21.55	1.11	0.02	0.24	0.27
	5GNR-n48	DFT-S QPSK100M	Rear Face	10	641110	1	1	1	Ant 2	w/o	-	1.00	22.00	21.55	1.11	0.16	0.156	0.17
	5GNR-n48	DFT-S QPSK100M	Left Side	0	641110	1	1	1	Ant 2	w/o	-	1.00	22.00	21.55	1.11	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Right Side	0	641110	1	1	1	Ant 2	w/o	-	1.00	22.00	21.55	1.11	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Top Side	0	641110	1	1	1	Ant 2	w/o	-	1.00	22.00	21.55	1.11	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Bottom Side	5	641110	1	1	1	Ant 2	w/o	-	1.00	22.00	21.55	1.11	-0.03	0.154	0.17
	5GNR-n48	DFT-S QPSK100M	Bottom for Laptop	5	641110	135	69	1	Ant 2	w/o	-	1.00	22.00	21.52	1.12	0.03	0.239	0.27
	5GNR-n48	DFT-S QPSK100M	Rear Face	10	641110	135	69	1	Ant 2	w/o	-	1.00	22.00	21.52	1.12	0.12	0.15	0.17
	5GNR-n48	DFT-S QPSK100M	Left Side	0	641110	135	69	1	Ant 2	w/o	-	1.00	22.00	21.52	1.12	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Right Side	0	641110	135	69	1	Ant 2	w/o	-	1.00	22.00	21.52	1.12	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Top Side	0	641110	135	69	1	Ant 2	w/o	-	1.00	22.00	21.52	1.12	0	<0.001	0.00
	5GNR-n48	DFT-S QPSK100M	Bottom Side	5	641110	135	69	1	Ant 2	w/o	-	1.00	22.00	21.52	1.12	-0.12	0.15	0.17
	5GNR-n48	DFT-S QPSK100M	Bottom for Laptop	0	641110	1	1	1	Ant 0	w/	-	1.00	15.50	15.48	1.00	-0.11	0.393	0.39
	5GNR-n48	DFT-S QPSK100M	Rear Face	0	641110	1	1	1	Ant 0	w/	-	1.00	13.50	13.46	1.01	0.04	0.303	0.31
	5GNR-n48	DFT-S QPSK100M	Bottom Side	0	641110	1	1	1	Ant 0	w/	-	1.00	13.50	13.46	1.01	0.04	0.305	0.31
	5GNR-n48	DFT-S QPSK100M	Bottom for Laptop	0	641110	135	69	1	Ant 0	w/	-	1.00	15.50	15.45	1.01	0.19	0.39	0.39
	5GNR-n48	DFT-S QPSK100M	Rear Face	0	641110	135	69	1	Ant 0	w/	-	1.00	13.50	13.28	1.05	-0.09	0.298	0.31
	5GNR-n48	DFT-S QPSK100M	Bottom Side	0	641110	135	69	1	Ant 0	w/	-	1.00	13.50	13.28	1.05	-0.19	0.226	0.24
	5GNR-n48	DFT-S QPSK100M	Bottom for Laptop	0	641110	1	1	1	Ant 2	w/	-	1.00	21.00	20.89	1.03	-0.05	0.442	0.46
	5GNR-n48	DFT-S QPSK100M	Rear Face	0	641110	1	1	1	Ant 2	w/	-	1.00	16.50	15.97	1.13	-0.07	0.374	0.42
	5GNR-n48	DFT-S QPSK100M	Bottom Side	0	641110	1	1	1	Ant 2	w/	-	1.00	16.50	15.97	1.13	0.06	0.098	0.11
	5GNR-n48	DFT-S QPSK100M	Bottom for Laptop	0	641110	135	69	1	Ant 2	w/	-	1.00	21.00	20.86	1.03	0.12	0.436	0.45
	5GNR-n48	DFT-S QPSK100M	Rear Face	0	641110	135	69	1	Ant 2	w/	-	1.00	16.50	15.92	1.14	0.03	0.361	0.41

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n48	DFT-S QPSK100M	Bottom Side	0	641110	135	69	1	Ant 2	w/	-	1.00	16.50	15.92	1.14	-0.09	0.07	0.08
	5GNR-n48	DFT-S QPSK100M	Bottom Side	5	640000	1	1	1	Ant 0	w/o	-	1.00	22.00	21.49	1.12	0.04	0.644	0.72
	5GNR-n48	DFT-S QPSK100M	Bottom Side	5	642222	1	1	1	Ant 0	w/o	-	1.00	22.00	21.42	1.14	-0.11	0.604	0.69
	5GNR-n48	DFT-S QPSK100M	Bottom Side	5	643332	1	1	1	Ant 0	w/o	-	1.00	22.00	21.52	1.12	-0.15	0.644	0.72
	5GNR-n48	DFT-S QPSK100M	Bottom Side	5	641110	1	1	2	Ant 0	w/o	-	1.00	22.00	21.55	1.11	-0.12	0.661	0.73
	5GNR-n48	DFT-S QPSK100M	Bottom Side	5	641110	1	1	1	Ant 0	w/o	-	1.00	19.00	18.53	1.11	0.09	0.343	0.38
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	5	349000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.16	1.53	0.13	0.15	0.23
	5GNR-n66	DFT-S QPSK40M	Rear Face	10	349000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.16	1.53	0.01	0.057	0.09
	5GNR-n66	DFT-S QPSK40M	Left Side	0	349000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.16	1.53	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Right Side	0	349000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.16	1.53	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Top Side	0	349000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.16	1.53	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Bottom Side	5	349000	1	1	1	Ant 0	w/o	-	1.00	24.00	22.16	1.53	0.03	0.041	0.06
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	5	349000	108	54	1	Ant 0	w/o	-	1.00	24.00	22.13	1.54	0.09	0.128	0.20
	5GNR-n66	DFT-S QPSK40M	Rear Face	10	349000	108	54	1	Ant 0	w/o	-	1.00	24.00	22.13	1.54	0.14	0.047	0.07
	5GNR-n66	DFT-S QPSK40M	Left Side	0	349000	108	54	1	Ant 0	w/o	-	1.00	24.00	22.13	1.54	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Right Side	0	349000	108	54	1	Ant 0	w/o	-	1.00	24.00	22.13	1.54	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Top Side	0	349000	108	54	1	Ant 0	w/o	-	1.00	24.00	22.13	1.54	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Bottom Side	5	349000	108	54	1	Ant 0	w/o	-	1.00	24.00	22.13	1.54	0.15	0.035	0.05
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	5	349000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.16	1.53	0.19	0.359	0.55
	5GNR-n66	DFT-S QPSK40M	Rear Face	10	349000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.16	1.53	-0.09	0.137	0.21
	5GNR-n66	DFT-S QPSK40M	Left Side	0	349000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.16	1.53	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Right Side	0	349000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.16	1.53	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Top Side	0	349000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.16	1.53	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Bottom Side	5	349000	1	1	1	Ant 2	w/o	-	1.00	24.00	22.16	1.53	0.03	0.085	0.13
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	5	349000	108	54	1	Ant 2	w/o	-	1.00	24.00	22.13	1.54	-0.09	0.357	0.55
	5GNR-n66	DFT-S QPSK40M	Rear Face	10	349000	108	54	1	Ant 2	w/o	-	1.00	24.00	22.13	1.54	-0.18	0.115	0.18
	5GNR-n66	DFT-S QPSK40M	Left Side	0	349000	108	54	1	Ant 2	w/o	-	1.00	24.00	22.13	1.54	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Right Side	0	349000	108	54	1	Ant 2	w/o	-	1.00	24.00	22.13	1.54	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Top Side	0	349000	108	54	1	Ant 2	w/o	-	1.00	24.00	22.13	1.54	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Bottom Side	5	349000	108	54	1	Ant 2	w/o	-	1.00	24.00	22.13	1.54	0.04	0.067	0.10
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	5	349000	216	0	1	Ant 2	w/o	-	1.00	23.00	21.06	1.56	0.04	0.298	0.46
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	349000	1	1	1	Ant 0	w/	-	1.00	19.50	18.97	1.13	-0.08	0.132	0.15
	5GNR-n66	DFT-S QPSK40M	Rear Face	0	349000	1	1	1	Ant 0	w/	-	1.00	15.50	14.95	1.14	0.18	0.118	0.13
	5GNR-n66	DFT-S QPSK40M	Bottom Side	0	349000	1	1	1	Ant 0	w/	-	1.00	15.50	14.95	1.14	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	349000	108	54	1	Ant 0	w/	-	1.00	19.50	18.94	1.14	0.06	0.128	0.15
	5GNR-n66	DFT-S QPSK40M	Rear Face	0	349000	108	54	1	Ant 0	w/	-	1.00	15.50	14.92	1.14	0.17	0.092	0.10
	5GNR-n66	DFT-S QPSK40M	Bottom Side	0	349000	108	54	1	Ant 0	w/	-	1.00	15.50	14.92	1.14	0	<0.001	0.00
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	349000	1	1	1	Ant 2	w/	-	1.00	21.50	21.47	1.01	-0.02	0.612	0.62

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n66	DFT-S QPSK40M	Rear Face	0	349000	1	1	1	Ant 2	w/	-	1.00	20.00	19.97	1.01	-0.11	0.503	0.51
	5GNR-n66	DFT-S QPSK40M	Bottom Side	0	349000	1	1	1	Ant 2	w/	-	1.00	20.00	19.97	1.01	-0.15	0.157	0.16
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	349000	108	54	1	Ant 2	w/	-	1.00	21.50	21.39	1.03	0.06	0.609	0.63
	5GNR-n66	DFT-S QPSK40M	Rear Face	0	349000	108	54	1	Ant 2	w/	-	1.00	20.00	19.94	1.01	0.06	0.501	0.51
	5GNR-n66	DFT-S QPSK40M	Bottom Side	0	349000	108	54	1	Ant 2	w/	-	1.00	20.00	19.94	1.01	-0.04	0.156	0.16
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	349000	216	0	1	Ant 2	w/	-	1.00	20.50	20.44	1.01	-0.16	0.606	0.61
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	346000	1	1	1	Ant 2	w/	-	1.00	21.50	21.34	1.04	0.05	0.553	0.58
29	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	352000	1	1	1	Ant 2	w/	-	1.00	21.50	20.82	1.17	-0.07	0.737	0.86
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	346000	108	54	1	Ant 2	w/	-	1.00	21.50	21.26	1.06	-0.08	0.549	0.58
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	352000	108	54	1	Ant 2	w/	-	1.00	21.50	20.74	1.19	0.16	0.718	0.85
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	352000	1	1	2	Ant 2	w/	-	1.00	21.50	20.82	1.17	0.12	0.711	0.83
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	346000	1	1	2	Ant 2	w/	-	1.00	21.50	21.34	1.04	0.01	0.532	0.55
	5GNR-n66	DFT-S QPSK40M	Bottom for Laptop	0	349000	1	1	2	Ant 2	w/	-	1.00	21.50	21.47	1.01	-0.02	0.59	0.60
	5GNR-n66 ENDC	DFT-S QPSK40M	Bottom for Laptop	0	352000	1	1	1	Ant 2	w/	-	1.00	18.50	17.82	1.17	0.08	0.244	0.29
	5GNR-n71	DFT-S QPSK20M	Bottom for Laptop	5	137600	1	1	1	Ant 0	w/o	-	1.00	24.00	23.24	1.19	-0.15	0.253	0.30
	5GNR-n71	DFT-S QPSK20M	Rear Face	10	137600	1	1	1	Ant 0	w/o	-	1.00	24.00	23.24	1.19	-0.18	0.172	0.20
	5GNR-n71	DFT-S QPSK20M	Left Side	0	137600	1	1	1	Ant 0	w/o	-	1.00	24.00	23.24	1.19	0	<0.001	0.00
	5GNR-n71	DFT-S QPSK20M	Right Side	0	137600	1	1	1	Ant 0	w/o	-	1.00	24.00	23.24	1.19	0	<0.001	0.00
	5GNR-n71	DFT-S QPSK20M	Top Side	0	137600	1	1	1	Ant 0	w/o	-	1.00	24.00	23.24	1.19	0	<0.001	0.00
	5GNR-n71	DFT-S QPSK20M	Bottom Side	5	137600	1	1	1	Ant 0	w/o	-	1.00	24.00	23.24	1.19	0.16	0.197	0.23
	5GNR-n71	DFT-S QPSK20M	Bottom for Laptop	5	137600	50	28	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	0.07	0.214	0.26
	5GNR-n71	DFT-S QPSK20M	Rear Face	10	137600	50	28	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	0.15	0.133	0.16
	5GNR-n71	DFT-S QPSK20M	Left Side	0	137600	50	28	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	0	<0.001	0.00
	5GNR-n71	DFT-S QPSK20M	Right Side	0	137600	50	28	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	0	<0.001	0.00
	5GNR-n71	DFT-S QPSK20M	Top Side	0	137600	50	28	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	0	<0.001	0.00
	5GNR-n71	DFT-S QPSK20M	Bottom Side	5	137600	50	28	1	Ant 0	w/o	-	1.00	24.00	23.21	1.20	-0.16	0.194	0.23
	5GNR-n71	DFT-S QPSK20M	Bottom for Laptop	0	137600	1	1	1	Ant 0	w/	-	1.00	23.00	22.35	1.16	-0.08	0.485	0.56
30	5GNR-n71	DFT-S QPSK20M	Rear Face	0	137600	1	1	1	Ant 0	w/	-	1.00	20.50	20.35	1.04	-0.07	0.638	0.66
	5GNR-n71	DFT-S QPSK20M	Bottom Side	0	137600	1	1	1	Ant 0	w/	-	1.00	20.50	20.35	1.04	0.11	0.289	0.30
	5GNR-n71	DFT-S QPSK20M	Bottom for Laptop	0	137600	50	28	1	Ant 0	w/	-	1.00	23.00	22.32	1.17	-0.04	0.477	0.56
	5GNR-n71	DFT-S QPSK20M	Rear Face	0	137600	50	28	1	Ant 0	w/	-	1.00	20.50	20.32	1.04	-0.05	0.632	0.66
	5GNR-n71	DFT-S QPSK20M	Bottom Side	0	137600	50	28	1	Ant 0	w/	-	1.00	20.50	20.32	1.04	-0.17	0.284	0.30
	5GNR-n71	DFT-S QPSK20M	Rear Face	0	134600	1	1	1	Ant 0	w/	-	1.00	20.50	20.31	1.04	-0.01	0.519	0.54
	5GNR-n71	DFT-S QPSK20M	Rear Face	0	136100	1	1	1	Ant 0	w/	-	1.00	20.50	20.29	1.05	-0.04	0.574	0.60
	5GNR-n71	DFT-S QPSK20M	Rear Face	0	137600	1	1	2	Ant 0	w/	-	1.00	20.50	20.35	1.04	-0.01	0.622	0.65
	5GNR-n71 ENDC	DFT-S QPSK20M	Rear Face	0	137600	1	1	1	Ant 0	w/	-	1.00	17.50	17.35	1.04	0.08	0.206	0.21

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n77	DFT-S QPSK100M	Bottom for Laptop	5	662000	1	1	1	Ant 0	w/o	-	1.00	27.00	26.05	1.24	0.08	0.193	0.24
	5GNR-n77	DFT-S QPSK100M	Rear Face	10	662000	1	1	1	Ant 0	w/o	-	1.00	27.00	26.05	1.24	-0.01	0.074	0.09
	5GNR-n77	DFT-S QPSK100M	Left Side	0	662000	1	1	1	Ant 0	w/o	-	1.00	27.00	26.05	1.24	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Right Side	0	662000	1	1	1	Ant 0	w/o	-	1.00	27.00	26.05	1.24	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Top Side	0	662000	1	1	1	Ant 0	w/o	-	1.00	27.00	26.05	1.24	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Bottom Side	5	662000	1	1	1	Ant 0	w/o	-	1.00	27.00	26.05	1.24	0.14	0.114	0.14
	5GNR-n77	DFT-S QPSK100M	Bottom for Laptop	5	662000	135	69	1	Ant 0	w/o	-	1.00	27.00	26.03	1.25	0.15	0.193	0.24
	5GNR-n77	DFT-S QPSK100M	Rear Face	10	662000	135	69	1	Ant 0	w/o	-	1.00	27.00	26.03	1.25	0.14	0.07	0.09
	5GNR-n77	DFT-S QPSK100M	Left Side	0	662000	135	69	1	Ant 0	w/o	-	1.00	27.00	26.03	1.25	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Right Side	0	662000	135	69	1	Ant 0	w/o	-	1.00	27.00	26.03	1.25	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Top Side	0	662000	135	69	1	Ant 0	w/o	-	1.00	27.00	26.03	1.25	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Bottom Side	5	662000	135	69	1	Ant 0	w/o	-	1.00	27.00	26.03	1.25	0.02	0.113	0.14
	5GNR-n77	DFT-S QPSK100M	Bottom for Laptop	5	662000	1	1	1	Ant 2	w/o	-	1.00	27.00	26.05	1.24	-0.18	0.295	0.37
	5GNR-n77	DFT-S QPSK100M	Rear Face	10	662000	1	1	1	Ant 2	w/o	-	1.00	27.00	26.05	1.24	-0.04	0.169	0.21
	5GNR-n77	DFT-S QPSK100M	Left Side	0	662000	1	1	1	Ant 2	w/o	-	1.00	27.00	26.05	1.24	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Right Side	0	662000	1	1	1	Ant 2	w/o	-	1.00	27.00	26.05	1.24	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Top Side	0	662000	1	1	1	Ant 2	w/o	-	1.00	27.00	26.05	1.24	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Bottom Side	5	662000	1	1	1	Ant 2	w/o	-	1.00	27.00	26.05	1.24	0.05	0.283	0.35
	5GNR-n77	DFT-S QPSK100M	Bottom for Laptop	5	662000	135	69	1	Ant 2	w/o	-	1.00	27.00	26.03	1.25	-0.15	0.294	0.37
	5GNR-n77	DFT-S QPSK100M	Rear Face	10	662000	135	69	1	Ant 2	w/o	-	1.00	27.00	26.03	1.25	-0.07	0.166	0.21
	5GNR-n77	DFT-S QPSK100M	Left Side	0	662000	135	69	1	Ant 2	w/o	-	1.00	27.00	26.03	1.25	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Right Side	0	662000	135	69	1	Ant 2	w/o	-	1.00	27.00	26.03	1.25	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Top Side	0	662000	135	69	1	Ant 2	w/o	-	1.00	27.00	26.03	1.25	0	<0.001	0.00
	5GNR-n77	DFT-S QPSK100M	Bottom Side	5	662000	135	69	1	Ant 2	w/o	-	1.00	27.00	26.03	1.25	0.02	0.28	0.35
	5GNR-n77	DFT-S QPSK100M	Bottom for Laptop	0	662000	1	1	1	Ant 0	w/	-	1.00	14.50	14.49	1.00	0.09	0.07	0.07
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	662000	1	1	1	Ant 0	w/	-	1.00	13.00	12.99	1.00	0.04	0.105	0.11
	5GNR-n77	DFT-S QPSK100M	Bottom Side	0	662000	1	1	1	Ant 0	w/	-	1.00	13.00	12.99	1.00	0.14	0.028	0.03
	5GNR-n77	DFT-S QPSK100M	Bottom for Laptop	0	662000	135	69	1	Ant 0	w/	-	1.00	14.50	14.47	1.01	-0.17	0.066	0.07
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	662000	135	69	1	Ant 0	w/	-	1.00	13.00	12.96	1.01	0.19	0.092	0.09
	5GNR-n77	DFT-S QPSK100M	Bottom Side	0	662000	135	69	1	Ant 0	w/	-	1.00	13.00	12.96	1.01	-0.07	0.027	0.03
	5GNR-n77	DFT-S QPSK100M	Bottom for Laptop	0	662000	1	1	1	Ant 2	w/	-	1.00	26.00	25.71	1.07	0.04	0.567	0.61
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	662000	1	1	1	Ant 2	w/	-	1.00	19.00	18.86	1.03	-0.12	0.812	0.84
	5GNR-n77	DFT-S QPSK100M	Bottom Side	0	662000	1	1	1	Ant 2	w/	-	1.00	19.00	18.86	1.03	-0.13	0.327	0.34
	5GNR-n77	DFT-S QPSK100M	Bottom for Laptop	0	662000	135	69	1	Ant 2	w/	-	1.00	26.00	25.63	1.09	0.03	0.564	0.61
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	662000	135	69	1	Ant 2	w/	-	1.00	19.00	18.85	1.04	0.04	0.797	0.83
	5GNR-n77	DFT-S QPSK100M	Bottom Side	0	662000	135	69	1	Ant 2	w/	-	1.00	19.00	18.85	1.04	0.19	0.324	0.34
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	662000	270	0	1	Ant 2	w/	-	1.00	18.00	17.75	1.06	-0.15	0.635	0.67
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	650000	1	1	1	Ant 2	w/	-	1.00	19.00	18.45	1.14	-0.07	0.631	0.72
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	653000	1	1	1	Ant 2	w/	-	1.00	19.00	18.68	1.08	-0.03	0.617	0.67

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
31	5GNR-n77	DFT-S QPSK100M	Rear Face	0	656000	1	1	1	Ant 2	w/	-	1.00	19.00	18.71	1.07	-0.11	0.729	0.78
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	659000	1	1	1	Ant 2	w/	-	1.00	19.00	18.73	1.06	-0.02	0.816	0.86
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	650000	135	69	1	Ant 2	w/	-	1.00	19.00	18.44	1.14	-0.02	0.628	0.72
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	653000	135	69	1	Ant 2	w/	-	1.00	19.00	18.67	1.08	0.04	0.606	0.65
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	656000	135	69	1	Ant 2	w/	-	1.00	19.00	18.70	1.07	-0.11	0.725	0.78
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	659000	135	69	1	Ant 2	w/	-	1.00	19.00	18.72	1.07	0.11	0.799	0.85
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	659000	1	1	2	Ant 2	w/	-	1.00	19.00	18.73	1.06	0.04	0.797	0.84
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	650000	1	1	2	Ant 2	w/	-	1.00	19.00	18.45	1.14	-0.1	0.616	0.70
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	653000	1	1	2	Ant 2	w/	-	1.00	19.00	18.68	1.08	-0.03	0.602	0.65
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	656000	1	1	2	Ant 2	w/	-	1.00	19.00	18.71	1.07	-0.05	0.71	0.76
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	662000	1	1	2	Ant 2	w/	-	1.00	19.00	18.86	1.03	0.02	0.793	0.82
	5GNR-n77 ENDC	DFT-S QPSK100M	Rear Face	0	659000	1	1	1	Ant 2	w/	-	1.00	16.00	15.73	1.06	-0.07	0.228	0.24
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	659000	1	1	1	Ant 2	w/	-	1.00	19.00	18.73	1.06	0.04	0.798	0.85
	5GNR-n78	DFT-S QPSK100M	Bottom for Laptop	5	650000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.72	1.07	0.18	0.186	0.20
	5GNR-n78	DFT-S QPSK100M	Rear Face	10	650000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.72	1.07	-0.17	0.171	0.18
	5GNR-n78	DFT-S QPSK100M	Left Side	0	650000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.72	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Right Side	0	650000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.72	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Top Side	0	650000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.72	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Bottom Side	5	650000	1	1	1	Ant 0	w/o	-	1.00	24.00	23.72	1.07	0.19	0.194	0.21
	5GNR-n78	DFT-S QPSK100M	Bottom for Laptop	5	650000	135	69	1	Ant 0	w/o	-	1.00	24.00	23.69	1.07	0.17	0.167	0.18
	5GNR-n78	DFT-S QPSK100M	Rear Face	10	650000	135	69	1	Ant 0	w/o	-	1.00	24.00	23.69	1.07	-0.03	0.163	0.17
	5GNR-n78	DFT-S QPSK100M	Left Side	0	650000	135	69	1	Ant 0	w/o	-	1.00	24.00	23.69	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Right Side	0	650000	135	69	1	Ant 0	w/o	-	1.00	24.00	23.69	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Top Side	0	650000	135	69	1	Ant 0	w/o	-	1.00	24.00	23.69	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Bottom Side	5	650000	135	69	1	Ant 0	w/o	-	1.00	24.00	23.69	1.07	0.04	0.192	0.21
	5GNR-n78	DFT-S QPSK100M	Bottom for Laptop	5	650000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.72	1.07	-0.11	0.205	0.22
	5GNR-n78	DFT-S QPSK100M	Rear Face	10	650000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.72	1.07	-0.03	0.084	0.09
	5GNR-n78	DFT-S QPSK100M	Left Side	0	650000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.72	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Right Side	0	650000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.72	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Top Side	0	650000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.72	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Bottom Side	5	650000	1	1	1	Ant 2	w/o	-	1.00	24.00	23.72	1.07	-0.13	0.088	0.09
	5GNR-n78	DFT-S QPSK100M	Bottom for Laptop	5	650000	135	69	1	Ant 2	w/o	-	1.00	24.00	23.69	1.07	-0.04	0.203	0.22
	5GNR-n78	DFT-S QPSK100M	Rear Face	10	650000	135	69	1	Ant 2	w/o	-	1.00	24.00	23.69	1.07	-0.14	0.081	0.09
	5GNR-n78	DFT-S QPSK100M	Left Side	0	650000	135	69	1	Ant 2	w/o	-	1.00	24.00	23.69	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Right Side	0	650000	135	69	1	Ant 2	w/o	-	1.00	24.00	23.69	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Top Side	0	650000	135	69	1	Ant 2	w/o	-	1.00	24.00	23.69	1.07	0	<0.001	0.00
	5GNR-n78	DFT-S QPSK100M	Bottom Side	5	650000	135	69	1	Ant 2	w/o	-	1.00	24.00	23.69	1.07	-0.12	0.087	0.09
	5GNR-n78	DFT-S QPSK100M	Bottom for Laptop	0	650000	1	1	1	Ant 0	w/	-	1.00	15.50	15.48	1.00	-0.16	0.083	0.08

Body SAR Test Result

Body SAR Test Result																		
System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5GNR-n78	DFT-S QPSK100M	Rear Face	0	650000	1	1	1	Ant 0	w/	-	1.00	12.00	11.53	1.11	0.03	0.063	0.07
	5GNR-n78	DFT-S QPSK100M	Bottom Side	0	650000	1	1	1	Ant 0	w/	-	1.00	12.00	11.53	1.11	0.14	0.028	0.03
	5GNR-n78	DFT-S QPSK100M	Bottom for Laptop	0	650000	135	69	1	Ant 0	w/	-	1.00	15.50	15.45	1.01	-0.06	0.077	0.08
	5GNR-n78	DFT-S QPSK100M	Rear Face	0	650000	135	69	1	Ant 0	w/	-	1.00	12.00	11.51	1.12	-0.16	0.06	0.07
	5GNR-n78	DFT-S QPSK100M	Bottom Side	0	650000	135	69	1	Ant 0	w/	-	1.00	12.00	11.51	1.12	-0.07	0.017	0.02
	5GNR-n78	DFT-S QPSK100M	Bottom for Laptop	0	650000	1	1	1	Ant 2	w/	-	1.00	24.00	23.72	1.07	-0.16	0.38	0.41
32	5GNR-n78	DFT-S QPSK100M	Rear Face	0	650000	1	1	1	Ant 2	w/	-	1.00	21.50	20.49	1.26	-0.05	0.442	0.56
	5GNR-n78	DFT-S QPSK100M	Bottom Side	0	650000	1	1	1	Ant 2	w/	-	1.00	21.50	20.49	1.26	0.02	0.145	0.18
	5GNR-n78	DFT-S QPSK100M	Bottom for Laptop	0	650000	135	69	1	Ant 2	w/	-	1.00	24.00	23.69	1.07	0.04	0.378	0.40
	5GNR-n78	DFT-S QPSK100M	Rear Face	0	650000	135	69	1	Ant 2	w/	-	1.00	21.50	20.34	1.31	-0.04	0.422	0.55
	5GNR-n78	DFT-S QPSK100M	Bottom Side	0	650000	135	69	1	Ant 2	w/	-	1.00	21.50	20.34	1.31	0.12	0.144	0.19
	5GNR-n78	DFT-S QPSK100M	Rear Face	0	650000	1	1	2	Ant 2	w/	-	1.00	21.50	20.49	1.26	-0.02	0.432	0.54
	5GNR-n78 ENDC	DFT-S QPSK100M	Rear Face	0	650000	1	1	1	Ant 2	w/	-	1.00	18.50	17.49	1.26	0.04	0.104	0.13

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Bottom for Laptop	0	6			1	Ant 0		99.10	1.01	17.00	16.99	1.00	-0.08	0.371	0.37
	WLAN2.4G	802.11b	Rear Face	0	6			1	Ant 0		99.10	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Left Side	0	6			1	Ant 0		99.10	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	0	6			1	Ant 0		99.10	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Top Side	0	6			1	Ant 0		99.10	1.01	18.50	18.49	1.00	0.17	0.1	0.10
	WLAN2.4G	802.11b	Bottom Side	0	6			1	Ant 0		99.10	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom for Laptop	0	6			1	Ant 1		98.90	1.01	17.00	16.99	1.00	0.02	0.469	0.47
	WLAN2.4G	802.11b	Rear Face	0	6			1	Ant 1		98.90	1.01	18.50	18.49	1.00	-0.15	0.035	0.04
	WLAN2.4G	802.11b	Left Side	0	6			1	Ant 1		98.90	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	0	6			1	Ant 1		98.90	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Top Side	0	6			1	Ant 1		98.90	1.01	18.50	18.49	1.00	-0.08	0.054	0.05
	WLAN2.4G	802.11b	Bottom Side	0	6			1	Ant 1		98.90	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	6			1	Ant 0+1		99.50	1.01	17.00	16.99	1.00	0.02	0.237	0.24
	WLAN2.4G	802.11n HT40	Rear Face	0	6			1	Ant 0+1		99.50	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11n HT40	Left Side	0	6			1	Ant 0+1		99.50	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11n HT40	Right Side	0	6			1	Ant 0+1		99.50	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11n HT40	Top Side	0	6			1	Ant 0+1		99.50	1.01	18.50	18.49	1.00	0.08	0.045	0.05
	WLAN2.4G	802.11n HT40	Bottom Side	0	6			1	Ant 0+1		99.50	1.01	18.50	18.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom for Laptop	0	1			1	Ant 1		98.90	1.01	17.00	16.95	1.01	0.14	0.387	0.39
33	WLAN2.4G	802.11b	Bottom for Laptop	0	11			1	Ant 1		98.90	1.01	17.00	16.97	1.01	-0.15	0.519	0.53
	WLAN2.4G	802.11b	Bottom for Laptop	0	12			1	Ant 1		98.90	1.01	17.00	16.95	1.01	-0.12	0.505	0.52
	WLAN2.4G	802.11b	Bottom for Laptop	0	13			1	Ant 1		98.90	1.01	17.00	16.98	1.00	-0.07	0.485	0.49
	WLAN2.4G	802.11b	Bottom for Laptop	0	11			2	Ant 1		98.90	1.01	17.00	16.97	1.01	-0.07	0.489	0.50

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50			1	Ant 0		97.00	1.03	13.00	12.98	1.00	-0.08	0.807	0.83
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50			1	Ant 0		97.00	1.03	11.50	11.48	1.00	0.04	0.109	0.11
	WLAN5.3G	802.11ac VHT160	Left Side	0	50			1	Ant 0		97.00	1.03	11.50	11.48	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Right Side	0	50			1	Ant 0		97.00	1.03	11.50	11.48	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Top Side	0	50			1	Ant 0		97.00	1.03	11.50	11.48	1.00	0.05	0.795	0.82
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50			1	Ant 0		97.00	1.03	11.50	11.48	1.00	0	<0.001	0.00
34	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50			1	Ant 1		98.00	1.02	13.00	12.98	1.00	-0.14	0.953	0.97
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50			1	Ant 1		98.00	1.02	11.50	11.44	1.01	0.05	0.235	0.24
	WLAN5.3G	802.11ac VHT160	Left Side	0	50			1	Ant 1		98.00	1.02	11.50	11.44	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Right Side	0	50			1	Ant 1		98.00	1.02	11.50	11.44	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Top Side	0	50			1	Ant 1		98.00	1.02	11.50	11.44	1.01	-0.09	0.854	0.88
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50			1	Ant 1		98.00	1.02	11.50	11.44	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50			1	Ant 0+1		98.57	1.01	16.00	15.98	1.00	-0.13	0.876	0.88
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50			1	Ant 0+1		98.57	1.01	11.50	11.49	1.00	0.06	0.126	0.13
	WLAN5.3G	802.11ac VHT160	Left Side	0	50			1	Ant 0+1		98.57	1.01	11.50	11.49	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Right Side	0	50			1	Ant 0+1		98.57	1.01	11.50	11.49	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Top Side	0	50			1	Ant 0+1		98.57	1.01	11.50	11.49	1.00	-0.05	0.358	0.36
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50			1	Ant 0+1		98.57	1.01	11.50	11.49	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50			2	Ant 1		98.00	1.02	13.00	12.98	1.00	0.06	0.914	0.93
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50			1	Ant 1		98.00	1.02	13.00	12.98	1.00	0.04	0.945	0.96

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114			1	Ant 0		97.00	1.03	13.00	12.98	1.00	0.05	0.571	0.59
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114			1	Ant 0		97.00	1.03	11.50	11.45	1.01	-0.02	0.077	0.08
	WLAN5.6G	802.11ac VHT160	Left Side	0	114			1	Ant 0		97.00	1.03	11.50	11.45	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Right Side	0	114			1	Ant 0		97.00	1.03	11.50	11.45	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Top Side	0	114			1	Ant 0		97.00	1.03	11.50	11.45	1.01	0.14	0.603	0.63
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114			1	Ant 0		97.00	1.03	11.50	11.45	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114			1	Ant 1		98.00	1.02	13.00	12.97	1.01	0.06	0.858	0.88
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114			1	Ant 1		98.00	1.02	13.00	12.97	1.01	-0.05	0.222	0.23
	WLAN5.6G	802.11ac VHT160	Left Side	0	114			1	Ant 1		98.00	1.02	13.00	12.97	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Right Side	0	114			1	Ant 1		98.00	1.02	13.00	12.97	1.01	0	<0.001	0.00
35	WLAN5.6G	802.11ac VHT160	Top Side	0	114			1	Ant 1		98.00	1.02	13.00	12.97	1.01	-0.12	1.05	1.08
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114			1	Ant 1		98.00	1.02	13.00	12.97	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114			1	Ant 0+1		98.57	1.01	16.00	15.93	1.02	-0.06	0.746	0.77
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114			1	Ant 0+1		98.57	1.01	14.50	14.45	1.01	-0.02	0.214	0.22
	WLAN5.6G	802.11ac VHT160	Left Side	0	114			1	Ant 0+1		98.57	1.01	14.50	14.45	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Right Side	0	114			1	Ant 0+1		98.57	1.01	14.50	14.45	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Top Side	0	114			1	Ant 0+1		98.57	1.01	14.50	14.45	1.01	0.05	0.766	0.78
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114			1	Ant 0+1		98.57	1.01	14.50	14.45	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Top Side	0	114			2	Ant 1		98.00	1.02	13.00	12.97	1.01	0.03	1.01	1.04
	WLAN5.6G	802.11ac VHT160	Top Side	0	114			1	Ant 1		98.00	1.02	13.00	12.97	1.01	0.03	1.03	1.06

Body SAR Test Result

System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155			1	Ant 0		98.30	1.02	12.50	12.49	1.00	0.04	0.559	0.57
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155			1	Ant 0		98.30	1.02	13.00	12.98	1.00	-0.02	0.104	0.11
	WLAN5.8G	802.11ac VHT80	Left Side	0	155			1	Ant 0		98.30	1.02	13.00	12.98	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side	0	155			1	Ant 0		98.30	1.02	13.00	12.98	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155			1	Ant 0		98.30	1.02	13.00	12.98	1.00	0.12	0.806	0.82
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155			1	Ant 0		98.30	1.02	13.00	12.98	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155			1	Ant 1		98.30	1.02	12.50	12.43	1.02	0.03	0.448	0.47
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155			1	Ant 1		98.30	1.02	13.00	12.95	1.01	-0.09	0.171	0.18
	WLAN5.8G	802.11ac VHT80	Left Side	0	155			1	Ant 1		98.30	1.02	13.00	12.95	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side	0	155			1	Ant 1		98.30	1.02	13.00	12.95	1.01	0	<0.001	0.00
37	WLAN5.8G	802.11ac VHT80	Top Side	0	155			1	Ant 1		98.30	1.02	13.00	12.95	1.01	0.06	0.868	0.89
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155			1	Ant 1		98.30	1.02	13.00	12.95	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155			1	Ant 0+1		98.70	1.01	15.50	15.42	1.02	-0.02	0.437	0.45
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155			1	Ant 0+1		98.70	1.01	16.00	15.96	1.01	0.03	0.156	0.16
	WLAN5.8G	802.11ac VHT80	Left Side	0	155			1	Ant 0+1		98.70	1.01	16.00	15.96	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side	0	155			1	Ant 0+1		98.70	1.01	16.00	15.96	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155			1	Ant 0+1		98.70	1.01	16.00	15.96	1.01	0.01	0.697	0.71
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155			1	Ant 0+1		98.70	1.01	16.00	15.96	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155			2	Ant 1		98.30	1.02	13.00	12.95	1.01	0.05	0.843	0.87
	WLAN5.8G	802.11ac VHT80	Top Side	0	155			1	Ant 1		98.30	1.02	13.00	12.95	1.01	0.04	0.851	0.88



Body SAR Test Result

Body SAR Test Result																		
System & Position								DUT Configuration			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	BT	BDR	Bottom for Laptop	0	78			1	Ant 1		77.07	1.30	10.50	10.35	1.04	0.14	0.035	0.05
	BT	BDR	Rear Face	0	78			1	Ant 1		77.07	1.30	10.50	10.35	1.04	0	<0.001	0.00
	BT	BDR	Left Side	0	78			1	Ant 1		77.07	1.30	10.50	10.35	1.04	0	<0.001	0.00
	BT	BDR	Right Side	0	78			1	Ant 1		77.07	1.30	10.50	10.35	1.04	0	<0.001	0.00
	BT	BDR	Top Side	0	78			1	Ant 1		77.07	1.30	10.50	10.35	1.04	0	<0.001	0.00
	BT	BDR	Bottom Side	0	78			1	Ant 1		77.07	1.30	10.50	10.35	1.04	0	<0.001	0.00
	BT	BDR	Bottom for Laptop	0	0			1	Ant 1		77.07	1.30	10.50	9.79	1.18	-0.01	0.053	0.08
39	BT	BDR	Bottom for Laptop	0	39			1	Ant 1		77.07	1.30	10.50	10.23	1.06	-0.04	0.06	0.08
	BT	BDR	Bottom for Laptop	0	39			2	Ant 1		77.07	1.30	10.50	10.23	1.06	0.07	0.046	0.06



BUREAU
VERITAS

SAR and Power Density Test Result																										
System & Position						DUT Configuration		SAR										Power Density								
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Measured APD W/m² (4cm²)	Scaled APD W/m² (4cm²)	Grid Step [λ]	iPD [W/m2]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm2]	Power Drift [dB]	Normal psPD [W/m2]	Scaled Normal psPD [W/m2]	Total psPD [W/m2]	Scaled Total psPD [W/m2]
40	UNII-5	802.11ax HE160	Bottom for Laptop	0	47	1	Ant 0	96.90	1.03	11.50	11.47	1.01	0.04	0.876	0.91	5.11	5.32	0.0515	8.67	1.545	4.00	0.15	1.62	2.58	1.79	2.88
	UNII-5	802.11ax HE160	Rear Face	0	47	1	Ant 0	96.90	1.03	13.50	13.48	1.00	0.01	0.238	0.25	1.37	1.41									
	UNII-5	802.11ax HE160	Left Side	0	47	1	Ant 0	96.90	1.03	13.50	13.48	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11ax HE160	Right Side	0	47	1	Ant 0	96.90	1.03	13.50	13.48	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11ax HE160	Top Side	0	47	1	Ant 0	96.90	1.03	13.50	13.48	1.00	0.12	0.183	0.19	1.06	1.09									
	UNII-5	802.11ax HE160	Bottom Side	0	47	1	Ant 0	96.90	1.03	13.50	13.48	1.00	0.12	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11ax HE160	Bottom for Laptop	0	47	1	Ant 1	97.40	1.03	13.50	13.49	1.00	-0.06	0.623	0.64	3.6	3.71									
	UNII-5	802.11ax HE160	Rear Face	0	47	1	Ant 1	97.40	1.03	13.50	13.49	1.00	-0.04	0.256	0.26	1.48	1.52									
	UNII-5	802.11ax HE160	Left Side	0	47	1	Ant 1	97.40	1.03	13.50	13.49	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11ax HE160	Right Side	0	47	1	Ant 1	97.40	1.03	13.50	13.49	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11ax HE160	Top Side	0	47	1	Ant 1	97.40	1.03	13.50	13.49	1.00	0.14	0.249	0.26	1.43	1.47									
	UNII-5	802.11ax HE160	Bottom Side	0	47	1	Ant 1	97.40	1.03	13.50	13.49	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11ax HE160	Bottom for Laptop	0	47	1	Ant 0+1	97.40	1.03	13.50	13.47	1.01	0.05	0.375	0.39	2.17	2.26									
	UNII-5	802.11ax HE160	Rear Face	0	47	1	Ant 0+1	97.40	1.03	13.50	13.48	1.00	0.16	0.128	0.13	0.74	0.76									
	UNII-5	802.11ax HE160	Left Side	0	47	1	Ant 0+1	97.40	1.03	13.50	13.48	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11ax HE160	Right Side	0	47	1	Ant 0+1	97.40	1.03	13.50	13.48	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11ax HE160	Top Side	0	47	1	Ant 0+1	97.40	1.03	13.50	13.48	1.00	0.05	0.153	0.16	0.884	0.91									
	UNII-5	802.11ax HE160	Bottom Side	0	47	1	Ant 0+1	97.40	1.03	13.50	13.48	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11ax HE160	Bottom for Laptop	0	15	1	Ant 0	96.90	1.03	11.50	11.46	1.01	0.18	0.782	0.81	4.51	4.69	0.0502	7.65	1.545	4.00	0.03	1.42	2.26	1.53	2.46
	UNII-5	802.11ax HE160	Bottom for Laptop	0	79	1	Ant 0	96.90	1.03	11.50	11.44	1.01	-0.13	0.808	0.84	4.66	4.85	0.0529	7.91	1.545	4.00	0.11	1.47	2.34	1.58	2.54
	UNII-6	802.11ax HE160	Bottom for Laptop	0	111	1	Ant 0	96.90	1.03	10.50	10.46	1.01	-0.12	0.789	0.82	4.55	4.73	0.0542	7.73	1.545	4.00	0.05	1.44	2.29	1.55	2.49
	UNII-7	802.11ax HE160	Bottom for Laptop	0	143	1	Ant 0	96.90	1.03	10.50	10.48	1.00	-0.08	0.535	0.55	3.09	3.18									
	UNII-7	802.11ax HE160	Bottom for Laptop	0	175	1	Ant 0	96.90	1.03	10.50	10.46	1.01	-0.19	0.656	0.68	3.78	3.93									
	UNII-8	802.11ax HE160	Bottom for Laptop	0	207	1	Ant 0	96.90	1.03	10.00	9.94	1.01	0.19	0.752	0.78	4.34	4.51									
	UNII-5	802.11ax HE160	Bottom for Laptop	0	47	2	Ant 0	96.90	1.03	11.50	11.47	1.01	0.05	0.802	0.83	4.62	4.81	0.0515	7.85	1.545	4.00	0.09	1.46	2.32	1.57	2.52
	UNII-5	802.11ax HE160	Bottom for Laptop	0	15	2	Ant 0	96.90	1.03	11.50	11.46	1.01	0.14	0.712	0.74	4.11	4.28									
	UNII-5	802.11ax HE160	Bottom for Laptop	0	79	2	Ant 0	96.90	1.03	11.50	11.44	1.01	-0.16	0.739	0.77	4.26	4.43									
	UNII-6	802.11ax HE160	Bottom for Laptop	0	111	2	Ant 0	96.90	1.03	10.50	10.46	1.01	0.09	0.719	0.75	4.15	4.32									
	UNII-7	802.11ax HE160	Bottom for Laptop	0	143	2	Ant 0	96.90	1.03	10.50	10.48	1.00	0.03	0.465	0.48	2.68	2.76									
	UNII-7	802.11ax HE160	Bottom for Laptop	0	175	2	Ant 0	96.90	1.03	10.50	10.46	1.01	-0.06	0.586	0.61	3.37	3.51									
	UNII-8	802.11ax HE160	Bottom for Laptop	0	207	2	Ant 0	96.90	1.03	10.00	9.94	1.01	-0.03	0.683	0.71	3.94	4.10									
	UNII-5	802.11ax HE160	Bottom for Laptop	0	47	1	Ant 0	96.90	1.03	11.50	11.47	1.01	0.08	0.805	0.84	4.58	4.76									

Appendix G. SAR Measurement Variability

SAR repeated measurement are shown as below.

Repeated SAR							
Plot	Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio
R11	LTE 17	QPSK10M	Bottom for Laptop	23780	0.846	0.823	1.03
R15	LTE 38	QPSK20M	Rear Face	37850	0.949	0.911	1.04
R16	LTE 41	QPSK20M	Bottom for Laptop	40185	0.809	0.792	1.02
R18	LTE 66	QPSK20M	Bottom for Laptop	132572	0.99	0.94	1.05
R31	5GNR-n77	DFT-S QPSK100M	Rear Face	659000	0.816	0.798	1.02
R34	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	50	0.953	0.945	1.01
R35	WLAN5.6G	802.11ac VHT160	Top Side	114	1.05	1.03	1.02
R37	WLAN5.8G	802.11ac VHT80	Top Side	155	0.868	0.851	1.02
R40	UNII-5	802.11ax HE160	Bottom for Laptop	47	0.876	0.805	1.09

Appendix H. Analysis of Simultaneous Transmission.

The analysis of simultaneous transmission SAR are shown as below.

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
A	WWAN + WLAN 2.4G_Ant 0	Yes
B	WWAN + WLAN 2.4G_Ant 1	Yes
C	WWAN + WLAN 2.4G_Ant 0+1	Yes
D	WWAN + WLAN 5G_Ant 0	Yes
E	WWAN + WLAN 5G_Ant 1	Yes
F	WWAN + WLAN 5G_Ant 0+1	Yes
G	WWAN + BT_Ant1	Yes
H	WWAN + WLAN 2.4G_Ant 0+BT_Ant1	Yes
I	WWAN + WLAN 5G_Ant 0+BT_Ant1	Yes
J	WWAN + WLAN 5G_Ant 0+1+BT_Ant1	Yes
K	WWAN + WLAN 6G_Ant 0	Yes
L	WWAN + WLAN 6G_Ant 1	Yes
M	WWAN + WLAN 6G_Ant 0+1	Yes
N	WWAN + WLAN 6G_Ant 0+BT_Ant1	Yes
O	WWAN + WLAN 6G_Ant 0+1+BT_Ant1	Yes

Notes

1. The WLAN 2.4G and WLAN 5G and WLAN 6G cannot transmit simultaneously.
2. Simultaneous TX Combination A can be covered by H
3. Simultaneous TX Combination D can be covered by I
4. Simultaneous TX Combination F can be covered by J
5. Simultaneous TX Combination G can be covered by H
6. Simultaneous TX Combination K can be covered by N
7. Simultaneous TX Combination M can be covered by O

Simultaneous Transmission SAR Evaluation (Body)																					
Band	Position	1	2	3	4	5	6	7	8	9	10	11	B(1+3)	C(1+4)	E(1+6)	H(1+2+11)	I(1+5+11)	J(1+7+11)	L(1+9)	N(1+8+11)	O(1+10+11)
		Max WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg									
WCDMA II	Bottom for Laptop	0.31	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	0.84	0.55	1.28	0.76	1.22	1.27	0.95	1.30	0.78
	Rear Face	0.40	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.44	0.40	0.64	0.40	0.51	0.62	0.66	0.65	0.53
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
WCDMA IV	Bottom Side	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16
	Bottom for Laptop	0.28	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	0.81	0.52	1.25	0.73	1.19	1.24	0.92	1.27	0.75
	Rear Face	0.29	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.33	0.29	0.53	0.29	0.40	0.51	0.55	0.54	0.42
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
WCDMA V	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
	Bottom for Laptop	0.54	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.07	0.78	1.51	0.99	1.45	1.50	1.18	1.53	1.01
	Rear Face	0.45	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.49	0.45	0.69	0.45	0.56	0.67	0.71	0.70	0.58
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 2	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26
	Bottom for Laptop	0.85	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.38	1.09	1.82	1.30	1.76	1.81	1.49	1.84	1.32
	Rear Face	0.66	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.70	0.66	0.90	0.66	0.77	0.88	0.92	0.91	0.79
LTE 4	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16
	Bottom for Laptop	0.50	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.03	0.74	1.47	0.95	1.41	1.46	1.14	1.49	0.97
LTE 5	Rear Face	0.52	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.56	0.52	0.76	0.52	0.63	0.74	0.78	0.77	0.65
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39
LTE 7	Bottom for Laptop	0.76	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.29	1.00	1.73	1.21	1.67	1.72	1.40	1.75	1.23
	Rear Face	0.71	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.75	0.71	0.95	0.71	0.82	0.93	0.97	0.96	0.84
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
LTE 12	Bottom Side	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35
	Bottom for Laptop	0.68	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.21	0.92	1.65	1.13	1.59	1.64	1.32	1.67	1.15
	Rear Face	0.73	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.77	0.73	0.97	0.73	0.84	0.95	0.99	0.98	0.86
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 13	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	0.48	0.48	0.48	0.48	0.48	0.48	0.48	0.48
	Bottom for Laptop	0.59	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.12	0.83	1.56	1.04	1.50	1.55	1.23	1.58	1.06
	Rear Face	0.65	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.69	0.65	0.89	0.65	0.76	0.87	0.91	0.90	0.78
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 13	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41

Simultaneous Transmission SAR Evaluation (Body)																					
Band	Position	1	2	3	4	5	6	7	8	9	10	11	B(1+3)	C(1+4)	E(1+6)	H(1+2+11)	I(1+5+11)	J(1+7+11)	L(1+9)	N(1+8+11)	O(1+10+11)
		Max WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg									
LTE 14	Bottom for Laptop	0.60	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.13	0.84	1.57	1.05	1.51	1.56	1.24	1.59	1.07
	Rear Face	0.49	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.53	0.49	0.73	0.49	0.60	0.71	0.75	0.74	0.62
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
LTE 17	Bottom Side	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41
	Bottom for Laptop	0.88	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.41	1.12	1.85	1.33	1.79	1.84	1.52	1.87	1.35
	Rear Face	0.74	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.78	0.74	0.98	0.74	0.85	0.96	1.00	0.99	0.87
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 25	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54
	Bottom for Laptop	0.72	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.25	0.96	1.69	1.17	1.63	1.68	1.36	1.71	1.19
	Rear Face	0.70	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.74	0.70	0.94	0.70	0.81	0.92	0.96	0.95	0.83
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 26	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30
	Bottom for Laptop	0.67	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.20	0.91	1.64	1.12	1.58	1.63	1.31	1.66	1.14
	Rear Face	0.56	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.60	0.56	0.80	0.56	0.67	0.78	0.82	0.81	0.69
LTE 30	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30
	Bottom for Laptop	0.96	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.49	1.20	1.93	1.41	1.87	1.92	1.60	1.95	1.43
LTE 38	Rear Face	0.97	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	1.01	0.97	1.21	0.97	1.08	1.19	1.23	1.22	1.10
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
LTE 41	Bottom for Laptop	0.87	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.40	1.11	1.84	1.32	1.78	1.83	1.51	1.86	1.34
	Rear Face	0.23	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.27	0.23	0.47	0.23	0.34	0.45	0.49	0.48	0.36
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
LTE 48	Bottom Side	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08
	Bottom for Laptop	0.60	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.13	0.84	1.57	1.05	1.51	1.56	1.24	1.59	1.07
	Rear Face	0.42	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.46	0.42	0.66	0.42	0.53	0.64	0.68	0.67	0.55
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 66	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38
	Bottom for Laptop	1.02	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.55	1.26	1.99	1.47	1.93	1.98	1.66	2.01	1.49
	Rear Face	0.65	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.69	0.65	0.89	0.65	0.76	0.87	0.91	0.90	0.78
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 66	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21

Simultaneous Transmission SAR Evaluation (Body)																					
Band	Position	1	2	3	4	5	6	7	8	9	10	11	B(1+3)	C(1+4)	E(1+6)	H(1+2+11)	I(1+5+11)	J(1+7+11)	L(1+9)	N(1+8+11)	O(1+10+11)
		Max WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg									
LTE 71	Bottom for Laptop	0.60	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.13	0.84	1.57	1.05	1.51	1.56	1.24	1.59	1.07
	Rear Face	0.70	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.74	0.70	0.94	0.70	0.81	0.92	0.96	0.95	0.83
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
5G NR-n2	Bottom Side	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.32
	Bottom for Laptop	0.56	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.09	0.80	1.53	1.01	1.47	1.52	1.20	1.55	1.03
	Rear Face	0.47	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.51	0.47	0.71	0.47	0.58	0.69	0.73	0.72	0.60
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5G NR-n5	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27
	Bottom for Laptop	0.50	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.03	0.74	1.47	0.95	1.41	1.46	1.14	1.49	0.97
	Rear Face	0.39	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.43	0.39	0.63	0.39	0.50	0.61	0.65	0.64	0.52
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5G NR-n7	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.37
	Bottom for Laptop	0.96	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.49	1.20	1.93	1.41	1.87	1.92	1.60	1.95	1.43
	Rear Face	0.71	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.75	0.71	0.95	0.71	0.82	0.93	0.97	0.96	0.84
5G NR-n25	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	0.48	0.48	0.48	0.48	0.48	0.48	0.48	0.48
	Bottom for Laptop	0.58	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.11	0.82	1.55	1.03	1.49	1.54	1.22	1.57	1.05
5G NR-n30	Rear Face	0.49	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.53	0.49	0.73	0.49	0.60	0.71	0.75	0.74	0.62
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
5G NR-n38	Bottom for Laptop	0.98	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.51	1.22	1.95	1.43	1.89	1.94	1.62	1.97	1.45
	Rear Face	0.66	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.70	0.66	0.90	0.66	0.77	0.88	0.92	0.91	0.79
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
5G NR-n41	Bottom Side	0.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.59	0.59	0.59	0.59	0.59	0.59	0.59	0.59	0.59
	Bottom for Laptop	0.54	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.07	0.78	1.51	0.99	1.45	1.50	1.18	1.53	1.01
	Rear Face	0.45	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.49	0.45	0.69	0.45	0.56	0.67	0.71	0.70	0.58
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5G NR-n48	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12
	Bottom for Laptop	0.59	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.12	0.83	1.56	1.04	1.50	1.55	1.23	1.58	1.06
	Rear Face	0.43	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.47	0.43	0.67	0.43	0.54	0.65	0.69	0.68	0.56
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5G NR-n48	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78

Simultaneous Transmission SAR Evaluation (Body)																					
Band	Position	1	2	3	4	5	6	7	8	9	10	11	B(1+3)	C(1+4)	E(1+6)	H(1+2+11)	I(1+5+11)	J(1+7+11)	L(1+9)	N(1+8+11)	O(1+10+11)
		Max WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg									
SGNR-n66	Bottom for Laptop	0.86	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.39	1.10	1.83	1.31	1.77	1.82	1.50	1.85	1.33
	Rear Face	0.51	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.55	0.51	0.75	0.51	0.62	0.73	0.77	0.76	0.64
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16
SGNR-n71	Bottom for Laptop	0.56	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.09	0.80	1.53	1.01	1.47	1.52	1.20	1.55	1.03
	Rear Face	0.66	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.70	0.66	0.90	0.66	0.77	0.88	0.92	0.91	0.79
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30
SGNR-n77	Bottom for Laptop	0.61	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	1.14	0.85	1.58	1.06	1.52	1.57	1.25	1.60	1.08
	Rear Face	0.86	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.90	0.86	1.10	0.86	0.97	1.08	1.12	1.11	0.99
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35
SGNR-n78	Bottom for Laptop	0.41	0.37	0.53	0.24	0.83	0.97	0.88	0.91	0.64	0.39	0.08	0.94	0.65	1.38	0.86	1.32	1.37	1.05	1.40	0.88
	Rear Face	0.56	0.00	0.04	0.00	0.11	0.24	0.22	0.25	0.26	0.13	0.00	0.60	0.56	0.80	0.56	0.67	0.78	0.82	0.81	0.69
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.10	0.05	0.05	0.82	1.08	0.78	0.19	0.26	0.16	0.00	0.05	0.05	1.08	0.10	0.82	0.78	0.26	0.19	0.16
	Bottom Side	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21

Total Exposure Ratio (Body)									
Band	Position	1	8	9	10	11	L(1+9)	N(1+8+11)	O(1+10+11)
		Max WWAN	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
		1g SAR W/kg	W/m ²	W/m ²	W/m ²	1g SAR W/kg			
WCDMA II	Bottom for Laptop	0.31	2.88	0.00	0.00	0.08	0.19	0.53	0.24
	Rear Face	0.40	0.00	0.00	0.00	0.00	0.25	0.25	0.25
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.16	0.00	0.00	0.00	0.00	0.10	0.10	0.10
WCDMA IV	Bottom for Laptop	0.28	2.88	0.00	0.00	0.08	0.18	0.51	0.23
	Rear Face	0.29	0.00	0.00	0.00	0.00	0.18	0.18	0.18
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.13	0.00	0.00	0.00	0.00	0.08	0.08	0.08
WCDMA V	Bottom for Laptop	0.54	2.88	0.00	0.00	0.08	0.34	0.68	0.39
	Rear Face	0.45	0.00	0.00	0.00	0.00	0.28	0.28	0.28
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.40	0.00	0.00	0.00	0.00	0.25	0.25	0.25
LTE 2	Bottom for Laptop	0.60	2.88	0.00	0.00	0.08	0.38	0.71	0.43
	Rear Face	0.52	0.00	0.00	0.00	0.00	0.33	0.33	0.33
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.26	0.00	0.00	0.00	0.00	0.16	0.16	0.16
LTE 4	Bottom for Laptop	0.85	2.88	0.00	0.00	0.08	0.53	0.87	0.58
	Rear Face	0.66	0.00	0.00	0.00	0.00	0.41	0.41	0.41
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.16	0.00	0.00	0.00	0.00	0.10	0.10	0.10
LTE 5	Bottom for Laptop	0.50	2.88	0.00	0.00	0.08	0.31	0.65	0.36
	Rear Face	0.52	0.00	0.00	0.00	0.00	0.33	0.33	0.33
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.39	0.00	0.00	0.00	0.00	0.24	0.24	0.24
LTE 7	Bottom for Laptop	0.76	2.88	0.00	0.00	0.08	0.48	0.81	0.53
	Rear Face	0.71	0.00	0.00	0.00	0.00	0.44	0.44	0.44
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.35	0.00	0.00	0.00	0.00	0.22	0.22	0.22
LTE 12	Bottom for Laptop	0.68	2.88	0.00	0.00	0.08	0.43	0.76	0.48
	Rear Face	0.73	0.00	0.00	0.00	0.00	0.46	0.46	0.46
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.48	0.00	0.00	0.00	0.00	0.30	0.30	0.30
LTE 13	Bottom for Laptop	0.59	2.88	0.00	0.00	0.08	0.37	0.71	0.42
	Rear Face	0.65	0.00	0.00	0.00	0.00	0.41	0.41	0.41
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.41	0.00	0.00	0.00	0.00	0.26	0.26	0.26

Total Exposure Ratio (Body)									
Band	Position	1	8	9	10	11	L(1+9)	N(1+8+11)	O(1+10+11)
		Max WWAN	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
		1g SAR W/kg	W/m ²	W/m ²	W/m ²	1g SAR W/kg			
LTE 14	Bottom for Laptop	0.60	2.88	0.00	0.00	0.08	0.38	0.71	0.43
	Rear Face	0.49	0.00	0.00	0.00	0.00	0.31	0.31	0.31
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.41	0.00	0.00	0.00	0.00	0.26	0.26	0.26
LTE 17	Bottom for Laptop	0.88	2.88	0.00	0.00	0.08	0.55	0.89	0.60
	Rear Face	0.74	0.00	0.00	0.00	0.00	0.46	0.46	0.46
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.54	0.00	0.00	0.00	0.00	0.34	0.34	0.34
LTE 25	Bottom for Laptop	0.72	2.88	0.00	0.00	0.08	0.45	0.79	0.50
	Rear Face	0.70	0.00	0.00	0.00	0.00	0.44	0.44	0.44
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.41	0.00	0.00	0.00	0.00	0.26	0.26	0.26
LTE 26	Bottom for Laptop	0.60	2.88	0.00	0.00	0.08	0.38	0.71	0.43
	Rear Face	0.47	0.00	0.00	0.00	0.00	0.29	0.29	0.29
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.30	0.00	0.00	0.00	0.00	0.19	0.19	0.19
LTE 30	Bottom for Laptop	0.67	2.88	0.00	0.00	0.08	0.42	0.76	0.47
	Rear Face	0.56	0.00	0.00	0.00	0.00	0.35	0.35	0.35
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.30	0.00	0.00	0.00	0.00	0.19	0.19	0.19
LTE 38	Bottom for Laptop	0.96	2.88	0.00	0.00	0.08	0.60	0.94	0.65
	Rear Face	0.97	0.00	0.00	0.00	0.00	0.61	0.61	0.61
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.25	0.00	0.00	0.00	0.00	0.16	0.16	0.16
LTE 41	Bottom for Laptop	0.87	2.88	0.00	0.00	0.08	0.54	0.88	0.59
	Rear Face	0.23	0.00	0.00	0.00	0.00	0.14	0.14	0.14
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.08	0.00	0.00	0.00	0.00	0.05	0.05	0.05
LTE 48	Bottom for Laptop	0.60	2.88	0.00	0.00	0.08	0.38	0.71	0.43
	Rear Face	0.42	0.00	0.00	0.00	0.00	0.26	0.26	0.26
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.38	0.00	0.00	0.00	0.00	0.24	0.24	0.24
LTE 66	Bottom for Laptop	1.02	2.88	0.00	0.00	0.08	0.64	0.98	0.69
	Rear Face	0.65	0.00	0.00	0.00	0.00	0.41	0.41	0.41
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.21	0.00	0.00	0.00	0.00	0.13	0.13	0.13

Total Exposure Ratio (Body)									
Band	Position	1	8	9	10	11	L(1+9)	N(1+8+11)	O(1+10+11)
		Max WWAN	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
		1g SAR W/kg	W/m ²	W/m ²	W/m ²	1g SAR W/kg			
LTE 71	Bottom for Laptop	0.60	2.88	0.00	0.00	0.08	0.38	0.71	0.43
	Rear Face	0.70	0.00	0.00	0.00	0.00	0.44	0.44	0.44
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.32	0.00	0.00	0.00	0.00	0.20	0.20	0.20
5GNR-n2	Bottom for Laptop	0.56	2.88	0.00	0.00	0.08	0.35	0.69	0.40
	Rear Face	0.47	0.00	0.00	0.00	0.00	0.29	0.29	0.29
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.27	0.00	0.00	0.00	0.00	0.17	0.17	0.17
5GNR-n5	Bottom for Laptop	0.50	2.88	0.00	0.00	0.08	0.31	0.65	0.36
	Rear Face	0.39	0.00	0.00	0.00	0.00	0.24	0.24	0.24
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.34	0.00	0.00	0.00	0.00	0.21	0.21	0.21
5GNR-n7	Bottom for Laptop	0.83	2.88	0.00	0.00	0.08	0.52	0.86	0.57
	Rear Face	0.67	0.00	0.00	0.00	0.00	0.42	0.42	0.42
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.37	0.00	0.00	0.00	0.00	0.23	0.23	0.23
5GNR-n25	Bottom for Laptop	0.96	2.88	0.00	0.00	0.08	0.60	0.94	0.65
	Rear Face	0.71	0.00	0.00	0.00	0.00	0.44	0.44	0.44
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.48	0.00	0.00	0.00	0.00	0.30	0.30	0.30
5GNR-n30	Bottom for Laptop	0.58	2.88	0.00	0.00	0.08	0.36	0.70	0.41
	Rear Face	0.49	0.00	0.00	0.00	0.00	0.31	0.31	0.31
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.28	0.00	0.00	0.00	0.00	0.18	0.18	0.18
5GNR-n38	Bottom for Laptop	0.98	2.88	0.00	0.00	0.08	0.61	0.95	0.66
	Rear Face	0.66	0.00	0.00	0.00	0.00	0.41	0.41	0.41
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.59	0.00	0.00	0.00	0.00	0.37	0.37	0.37
5GNR-n41	Bottom for Laptop	0.54	2.88	0.00	0.00	0.08	0.34	0.68	0.39
	Rear Face	0.45	0.00	0.00	0.00	0.00	0.28	0.28	0.28
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.12	0.00	0.00	0.00	0.00	0.08	0.08	0.08
5GNR-n48	Bottom for Laptop	0.59	2.88	0.00	0.00	0.08	0.37	0.71	0.42
	Rear Face	0.43	0.00	0.00	0.00	0.00	0.27	0.27	0.27
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.78	0.00	0.00	0.00	0.00	0.49	0.49	0.49

Total Exposure Ratio (Body)									
Band	Position	1	8	9	10	11	L(1+9)	N(1+8+11)	O(1+10+11)
		Max WWAN	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
		1g SAR W/kg	W/m ²	W/m ²	W/m ²	1g SAR W/kg			
5GNR-n66	Bottom for Laptop	0.86	2.88	0.00	0.00	0.08	0.54	0.88	0.59
	Rear Face	0.51	0.00	0.00	0.00	0.00	0.32	0.32	0.32
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.16	0.00	0.00	0.00	0.00	0.10	0.10	0.10
5GNR-n71	Bottom for Laptop	0.56	2.88	0.00	0.00	0.08	0.35	0.69	0.40
	Rear Face	0.66	0.00	0.00	0.00	0.00	0.41	0.41	0.41
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.30	0.00	0.00	0.00	0.00	0.19	0.19	0.19
5GNR-n77	Bottom for Laptop	0.61	2.88	0.00	0.00	0.08	0.38	0.72	0.43
	Rear Face	0.86	0.00	0.00	0.00	0.00	0.54	0.54	0.54
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.35	0.00	0.00	0.00	0.00	0.22	0.22	0.22
5GNR-n78	Bottom for Laptop	0.41	2.88	0.00	0.00	0.08	0.26	0.59	0.31
	Rear Face	0.56	0.00	0.00	0.00	0.00	0.35	0.35	0.35
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Bottom Side	0.21	0.00	0.00	0.00	0.00	0.13	0.13	0.13

Simultaneous Transmission SAR Evaluation (Body_ENDC_LTE+5GNR)																								
Band	Band	Position	1	2	3	4	5	6	7	8	9	10	11	12	B(1+2+4)	C(1+2+5)	E(1+2+7)	H(1+2+3+12)	I(1+2+6+12)	J(1+2+8+12)	L(1+2+10)	N(1+2+9+12)	O(1+2+11+12)	
			Max WWAN	Max NR	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	WLAN 5GHz Ant 0	WLAN 5GHz Ant 1	WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	BT Ant 1	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
			1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	10g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg
LTE 2	5GNR-n5	Body	0.22	0.12	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.87	0.58	1.42	0.79	1.25	1.30	0.98	1.33	0.81	
LTE 2	5GNR-n71	Body	0.22	0.21	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.96	0.67	1.51	0.88	1.34	1.39	1.13	1.42	0.90	
LTE 2	5GNR-n77	Body	0.22	0.24	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.99	0.70	1.54	0.91	1.37	1.42	1.16	1.45	0.93	
LTE 2	5GNR-n78	Body	0.22	0.13	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.88	0.59	1.43	0.80	1.26	1.31	1.05	1.34	0.82	
LTE 5	5GNR-n2	Body	0.14	0.17	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.84	0.55	1.39	0.76	1.22	1.27	1.01	1.30	0.78	
LTE 5	5GNR-n66	Body	0.14	0.29	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.96	0.67	1.51	0.88	1.34	1.39	1.13	1.42	0.90	
LTE 5	5GNR-n77	Body	0.14	0.24	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.91	0.62	1.46	0.83	1.29	1.34	1.08	1.37	0.85	
LTE 5	5GNR-n78	Body	0.14	0.13	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.80	0.51	1.35	0.72	1.18	1.23	0.97	1.26	0.74	
LTE 7	5GNR-n78	Body	0.31	0.13	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.97	0.68	1.52	0.89	1.35	1.40	1.14	1.43	0.91	
LTE 12	5GNR-n2	Body	0.21	0.17	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.91	0.62	1.46	0.83	1.29	1.34	1.08	1.37	0.85	
LTE 12	5GNR-n66	Body	0.21	0.29	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	1.03	0.74	1.58	0.95	1.41	1.46	1.20	1.49	0.97	
LTE 12	5GNR-n77	Body	0.21	0.24	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.98	0.69	1.53	0.90	1.36	1.41	1.15	1.44	0.92	
LTE 13	5GNR-n2	Body	0.21	0.17	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.91	0.62	1.46	0.83	1.29	1.34	1.08	1.37	0.85	
LTE 13	5GNR-n66	Body	0.21	0.29	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	1.03	0.74	1.58	0.95	1.41	1.46	1.20	1.49	0.97	
LTE 13	5GNR-n77	Body	0.21	0.24	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.98	0.69	1.53	0.90	1.36	1.41	1.15	1.44	0.92	
LTE 14	5GNR-n2	Body	0.21	0.17	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.91	0.62	1.46	0.83	1.29	1.34	1.08	1.37	0.85	
LTE 14	5GNR-n66	Body	0.21	0.29	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	1.03	0.74	1.58	0.95	1.41	1.46	1.20	1.49	0.97	
LTE 14	5GNR-n77	Body	0.21	0.24	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.98	0.69	1.53	0.90	1.36	1.41	1.15	1.44	0.92	
LTE 25	5GNR-n41	Body	0.27	0.18	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.98	0.69	1.53	0.90	1.36	1.41	1.15	1.44	0.92	
LTE 26	5GNR-n78	Body	0.22	0.13	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.88	0.59	1.43	0.80	1.26	1.31	1.05	1.34	0.82	
LTE 30	5GNR-n5	Body	0.26	0.12	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.91	0.62	1.46	0.83	1.29	1.34	1.08	1.37	0.85	
LTE 30	5GNR-n77	Body	0.26	0.24	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	1.03	0.74	1.58	0.95	1.41	1.46	1.20	1.49	0.97	
LTE 38	5GNR-n78	Body	0.36	0.13	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	1.02	0.73	1.57	0.94	1.40	1.45	1.19	1.48	0.96	
LTE 41	5GNR-n41	Body	0.26	0.18	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.97	0.68	1.52	0.89	1.35	1.40	1.14	1.43	0.91	
LTE 41	5GNR-n77	Body	0.26	0.24	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	1.03	0.74	1.58	0.95	1.41	1.46	1.20	1.49	0.97	
LTE 48	5GNR-n5	Body	0.21	0.12	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.86	0.57	1.41	0.78	1.24	1.29	1.03	1.32	0.80	
LTE 48	5GNR-n66	Body	0.21	0.29	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	1.03	0.74	1.58	0.95	1.41	1.46	1.20	1.49	0.97	
LTE 66	5GNR-n5	Body	0.26	0.12	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	0.91	0.62	1.46	0.83	1.29	1.34	1.08	1.37	0.85	
LTE 66	5GNR-n71	Body	0.26	0.21	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	1.00	0.71	1.55	0.92	1.38	1.43	1.17	1.46	0.94	
LTE 66	5GNR-n77	Body	0.26	0.24	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.70	0.39	0.08	1.03	0.74	1.58	0.95	1.41	1.46	1.20	1.49	0.97	


Total Exposure Ratio (Body_ENDC_LTE+5GNR)											
Band	Band	Position	1	2	9	10	11	12	L(1+2+10)	N(1+2+9+12)	O(1+2+11+12)
			Max WWAN	Max NR	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	BT Ant 1	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
			1g SAR W/kg	1g SAR W/kg	W/m ²	W/m ²	W/m ²	1g SAR W/kg			
LTE 2	5GNR-n5	Body	0.22	0.12	2.88	0.00	0.00	0.08	0.21	0.55	0.26
LTE 2	5GNR-n71	Body	0.22	0.21	2.88	0.00	0.00	0.08	0.27	0.61	0.32
LTE 2	5GNR-n77	Body	0.22	0.24	2.88	0.00	0.00	0.08	0.29	0.63	0.34
LTE 2	5GNR-n78	Body	0.22	0.13	2.88	0.00	0.00	0.08	0.22	0.56	0.27
LTE 5	5GNR-n2	Body	0.14	0.17	2.88	0.00	0.00	0.08	0.19	0.53	0.24
LTE 5	5GNR-n66	Body	0.14	0.29	2.88	0.00	0.00	0.08	0.27	0.61	0.32
LTE 5	5GNR-n77	Body	0.14	0.24	2.88	0.00	0.00	0.08	0.24	0.58	0.29
LTE 5	5GNR-n78	Body	0.14	0.13	2.88	0.00	0.00	0.08	0.17	0.51	0.22
LTE 7	5GNR-n78	Body	0.31	0.13	2.88	0.00	0.00	0.08	0.28	0.61	0.33
LTE 12	5GNR-n2	Body	0.21	0.17	2.88	0.00	0.00	0.08	0.24	0.58	0.29
LTE 12	5GNR-n66	Body	0.21	0.29	2.88	0.00	0.00	0.08	0.31	0.65	0.36
LTE 12	5GNR-n77	Body	0.21	0.24	2.88	0.00	0.00	0.08	0.28	0.62	0.33
LTE 13	5GNR-n2	Body	0.21	0.17	2.88	0.00	0.00	0.08	0.24	0.58	0.29
LTE 13	5GNR-n66	Body	0.21	0.29	2.88	0.00	0.00	0.08	0.31	0.65	0.36
LTE 13	5GNR-n77	Body	0.21	0.24	2.88	0.00	0.00	0.08	0.28	0.62	0.33
LTE 14	5GNR-n2	Body	0.21	0.17	2.88	0.00	0.00	0.08	0.24	0.58	0.29
LTE 14	5GNR-n66	Body	0.21	0.29	2.88	0.00	0.00	0.08	0.31	0.65	0.36
LTE 14	5GNR-n77	Body	0.21	0.24	2.88	0.00	0.00	0.08	0.28	0.62	0.33
LTE 25	5GNR-n41	Body	0.27	0.18	2.88	0.00	0.00	0.08	0.28	0.62	0.33
LTE 26	5GNR-n78	Body	0.22	0.13	2.88	0.00	0.00	0.08	0.22	0.56	0.27
LTE 30	5GNR-n5	Body	0.26	0.12	2.88	0.00	0.00	0.08	0.24	0.58	0.29
LTE 30	5GNR-n77	Body	0.26	0.24	2.88	0.00	0.00	0.08	0.31	0.65	0.36
LTE 38	5GNR-n78	Body	0.36	0.13	2.88	0.00	0.00	0.08	0.31	0.64	0.36
LTE 41	5GNR-n41	Body	0.26	0.18	2.88	0.00	0.00	0.08	0.28	0.61	0.33
LTE 41	5GNR-n77	Body	0.26	0.24	2.88	0.00	0.00	0.08	0.31	0.65	0.36
LTE 48	5GNR-n5	Body	0.21	0.12	2.88	0.00	0.00	0.08	0.21	0.54	0.26
LTE 48	5GNR-n66	Body	0.21	0.29	2.88	0.00	0.00	0.08	0.31	0.65	0.36
LTE 66	5GNR-n5	Body	0.26	0.12	2.88	0.00	0.00	0.08	0.24	0.58	0.29
LTE 66	5GNR-n71	Body	0.26	0.21	2.88	0.00	0.00	0.08	0.29	0.63	0.34
LTE 66	5GNR-n77	Body	0.26	0.24	2.88	0.00	0.00	0.08	0.31	0.65	0.36


Simultaneous Transmission SAR Evaluation (Body_CA_LTE+LTE)																							
Inter-Band Uplink CA		Position	1	2	3	4	5	6	7	8	9	10	11	12	B(1+2+4)	C(1+2+5)	E(1+2+7)	H(1+2+3+12)	I(1+2+6+12)	J(1+2+8+12)	L(1+2+10)	N(1+2+9+12)	O(1+2+11+12)
			Max LTE PCC	Max LTE SCC	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	WLAN 5GHz Ant 0	WLAN 5GHz Ant 1	WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	BT Ant 1	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
			1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg
LTE 2	LTE 5	Body	0.22	0.14	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.89	0.60	1.44	0.81	1.27	1.32	1.00	1.35	0.83
LTE 2	LTE 12	Body	0.22	0.21	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.96	0.67	1.51	0.88	1.34	1.39	1.07	1.42	0.90
LTE 2	LTE 13	Body	0.22	0.21	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.96	0.67	1.51	0.88	1.34	1.39	1.07	1.42	0.90
LTE 2	LTE 14	Body	0.22	0.21	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.96	0.67	1.51	0.88	1.34	1.39	1.07	1.42	0.90
LTE 2	LTE 48	Body	0.22	0.21	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.96	0.67	1.51	0.88	1.34	1.39	1.07	1.42	0.90
LTE 4	LTE 5	Body	0.29	0.14	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.96	0.67	1.51	0.88	1.34	1.39	1.07	1.42	0.90
LTE 4	LTE 12	Body	0.29	0.21	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	1.03	0.74	1.58	0.95	1.41	1.46	1.14	1.49	0.97
LTE 4	LTE 13	Body	0.29	0.21	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	1.03	0.74	1.58	0.95	1.41	1.46	1.14	1.49	0.97
LTE 5	LTE 7	Body	0.14	0.31	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.98	0.69	1.53	0.90	1.36	1.41	1.09	1.44	0.92
LTE 5	LTE 30	Body	0.14	0.26	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.93	0.64	1.48	0.85	1.31	1.36	1.04	1.39	0.87
LTE 5	LTE 48	Body	0.14	0.21	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.88	0.59	1.43	0.80	1.26	1.31	0.99	1.34	0.82
LTE 5	LTE 66	Body	0.14	0.26	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.93	0.64	1.48	0.85	1.31	1.36	1.04	1.39	0.87
LTE 12	LTE 30	Body	0.21	0.26	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	1.00	0.71	1.55	0.92	1.38	1.43	1.11	1.46	0.94
LTE 12	LTE 66	Body	0.21	0.26	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	1.00	0.71	1.55	0.92	1.38	1.43	1.11	1.46	0.94
LTE 13	LTE 48	Body	0.21	0.21	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	0.95	0.66	1.50	0.87	1.33	1.38	1.06	1.41	0.89
LTE 13	LTE 66	Body	0.21	0.26	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	1.00	0.71	1.55	0.92	1.38	1.43	1.11	1.46	0.94
LTE 14	LTE 30	Body	0.21	0.26	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	1.00	0.71	1.55	0.92	1.38	1.43	1.11	1.46	0.94
LTE 14	LTE 66	Body	0.21	0.26	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	1.00	0.71	1.55	0.92	1.38	1.43	1.11	1.46	0.94
LTE 25	LTE 26	Body	0.27	0.22	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	1.02	0.73	1.57	0.94	1.40	1.45	1.13	1.48	0.96
LTE 48	LTE 66	Body	0.21	0.26	0.37	0.53	0.24	0.83	1.08	0.88	0.91	0.64	0.39	0.08	1.00	0.71	1.55	0.92	1.38	1.43	1.11	1.46	0.94


Total Exposure Ratio (Body_CA_LTE+LTE)											
Inter-Band Uplink CA		Position	1	2	9	10	11	12	L(1+2+10)	N(1+2+9+12)	O(1+2+11+12)
			Max LTE PCC	Max LTE SCC	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	BT Ant 1	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
			1g SAR W/kg	1g SAR W/kg	W/m ²	W/m ²	W/m ²	1g SAR W/kg			
LTE 2	LTE 5	Body	0.22	0.14	2.88	0.64	0.39	0.08	0.29	0.56	0.45
LTE 2	LTE 12	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.33	0.61	0.56
LTE 2	LTE 13	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 2	LTE 14	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 2	LTE 48	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 4	LTE 5	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 4	LTE 12	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 4	LTE 13	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 5	LTE 7	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 5	LTE 30	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 5	LTE 48	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 5	LTE 66	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 12	LTE 30	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 12	LTE 66	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 13	LTE 48	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 13	LTE 66	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 14	LTE 30	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 14	LTE 66	Body	0.00	0.00	0.00	0.00	0.00	0.08	0.00	0.05	0.05
LTE 25	LTE 26	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.05	0.05
LTE 48	LTE 66	Body	0.22	0.21	2.88	0.64	0.39	0.08	0.00	0.00	0.00


Appendix I. SAR to Peak Location Separation Ratio Analysis.


The result of SAR to Peak Location Separation Ratio Analysis are shown as below.

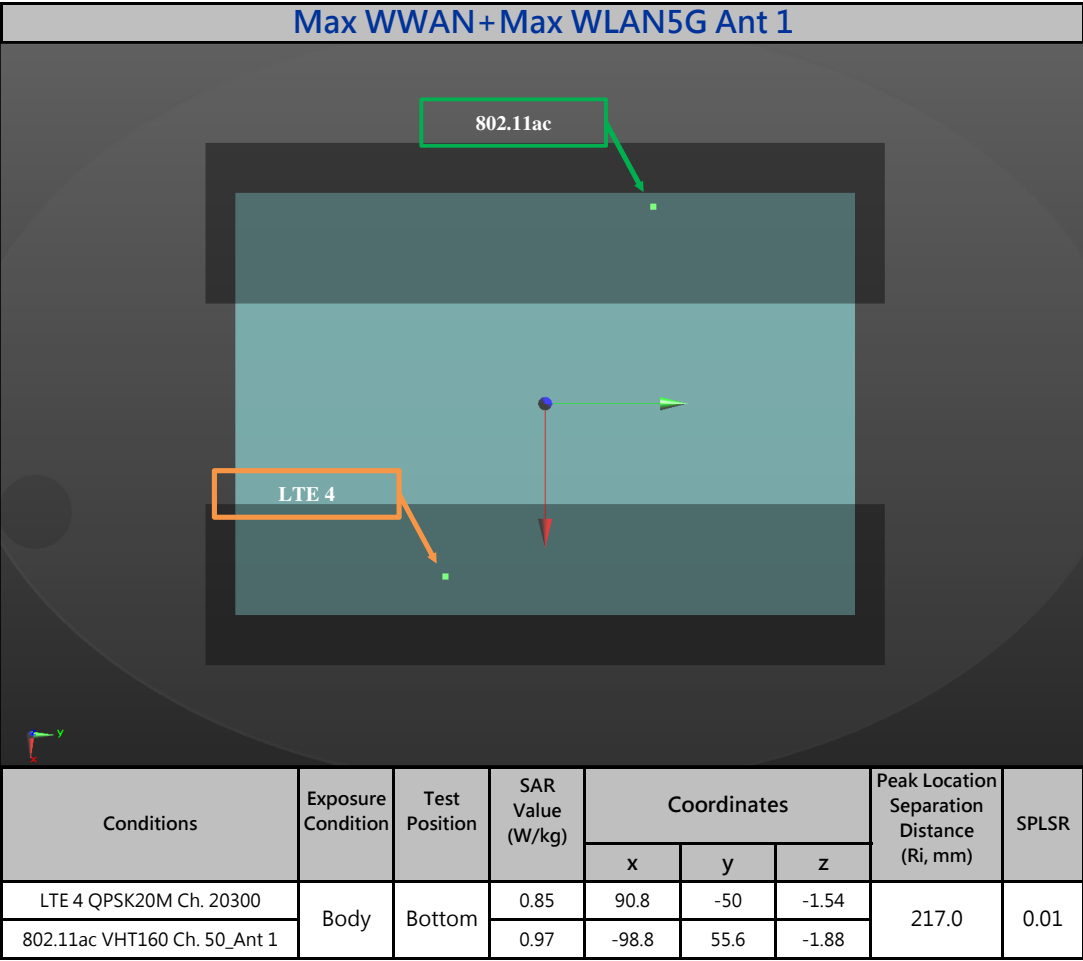


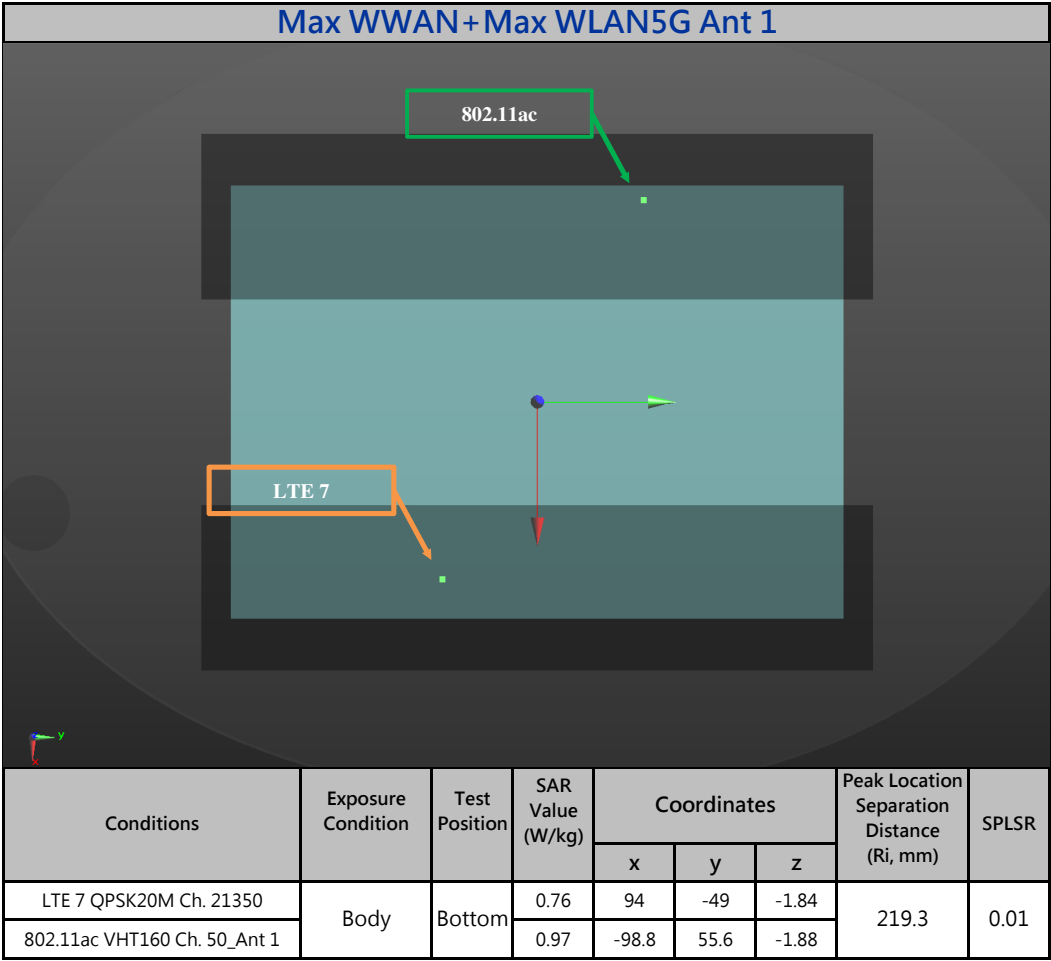


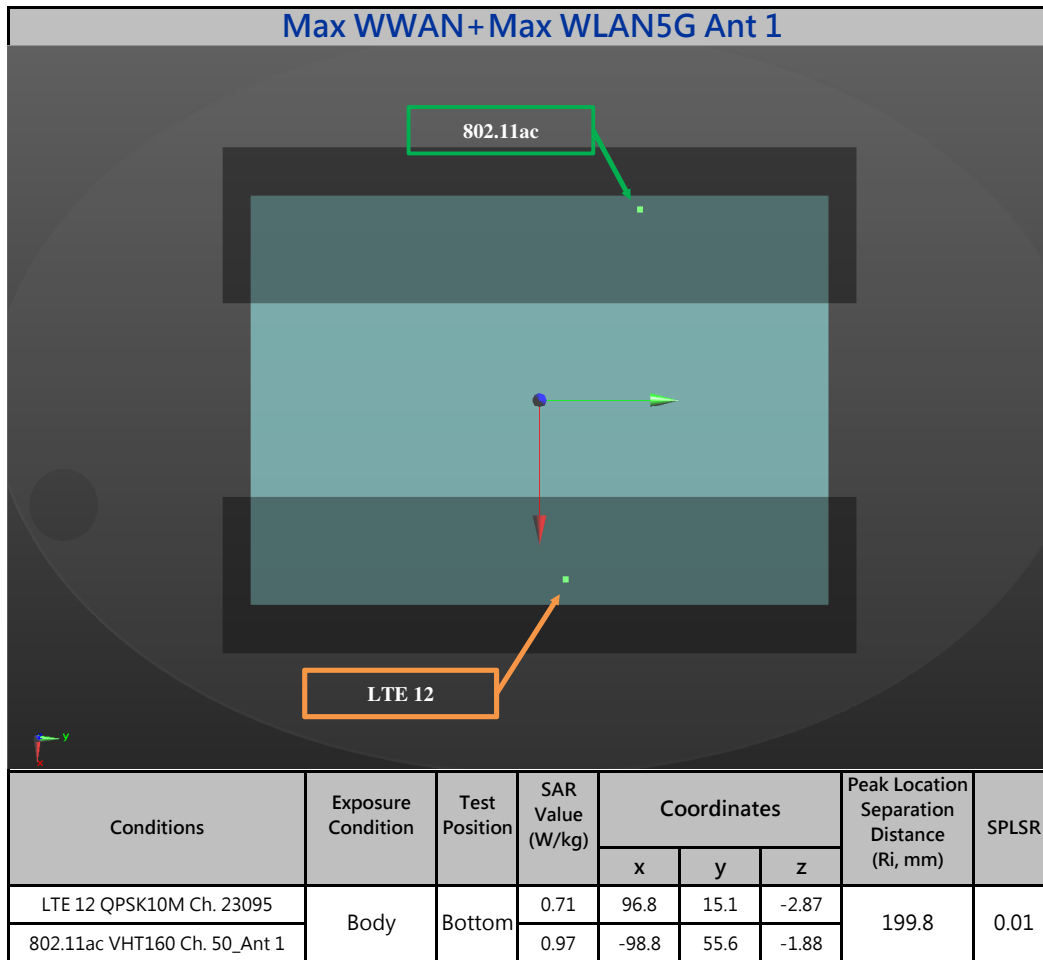


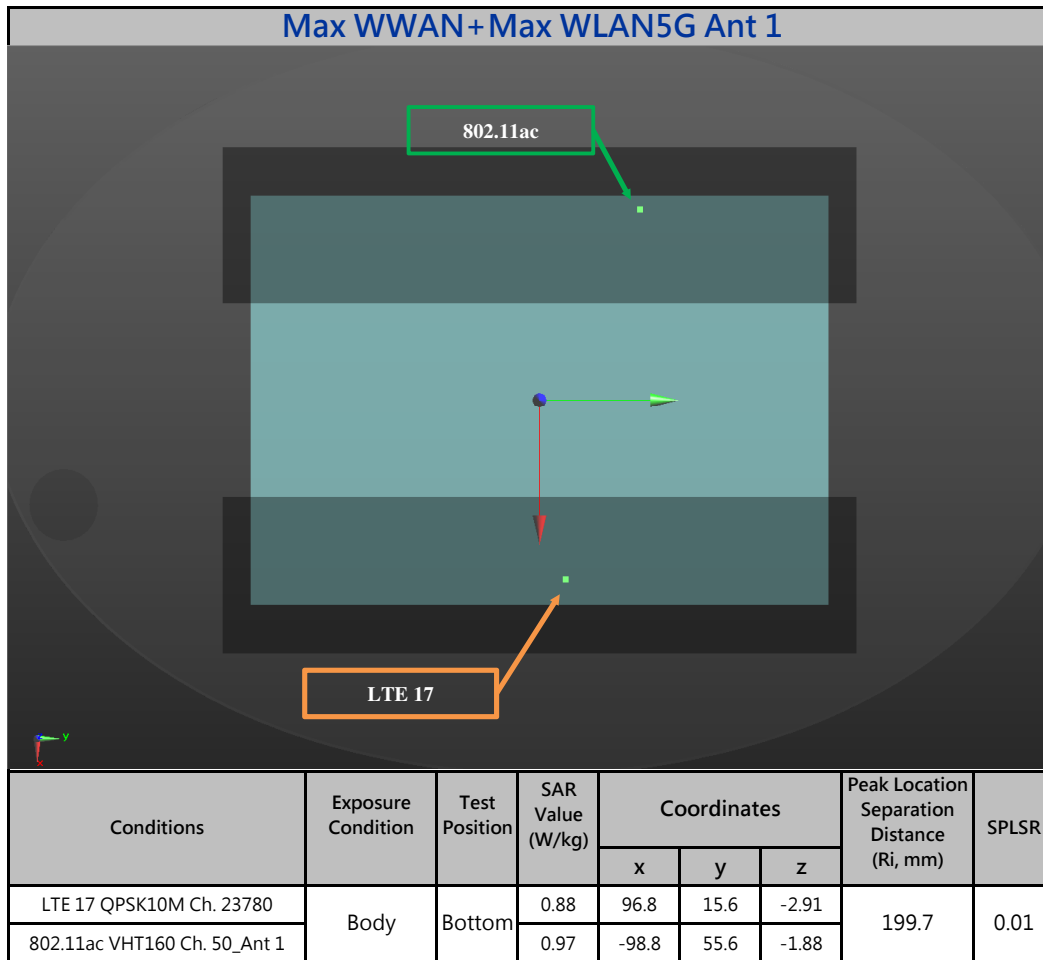


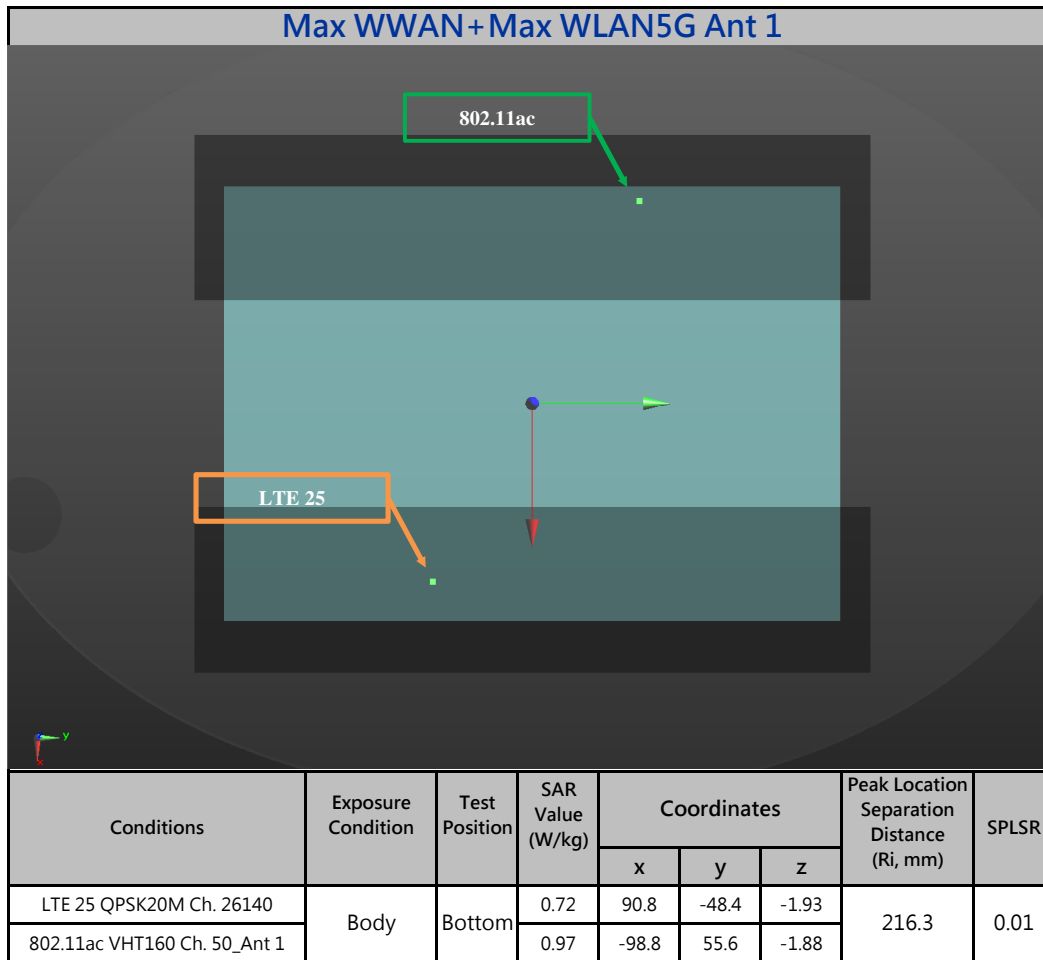


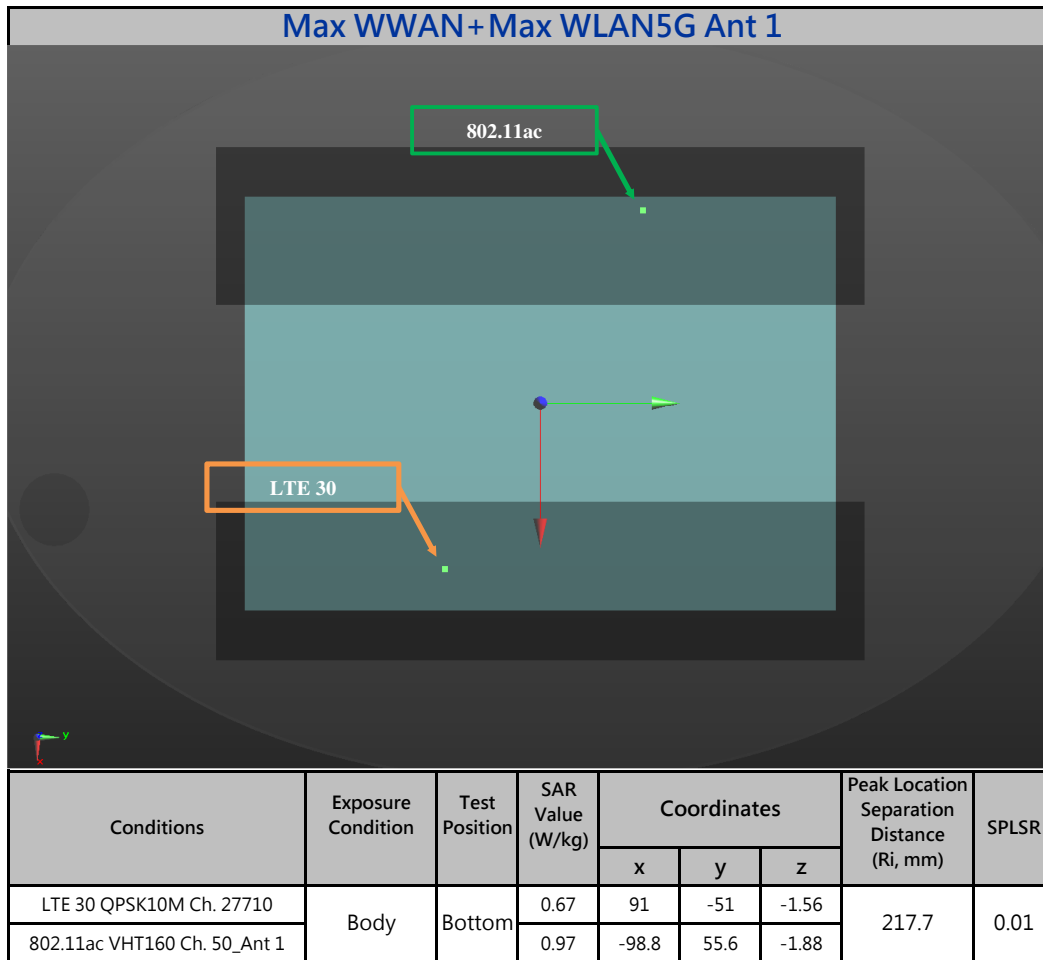


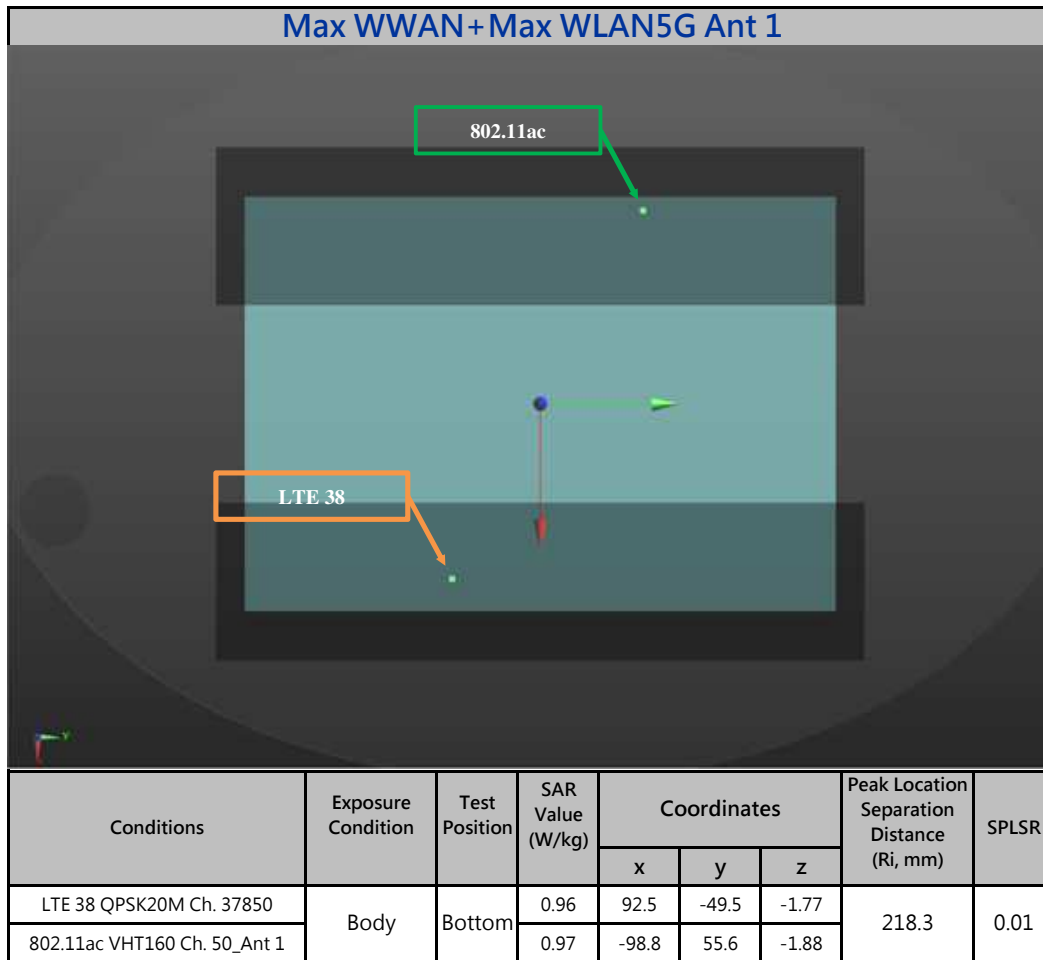


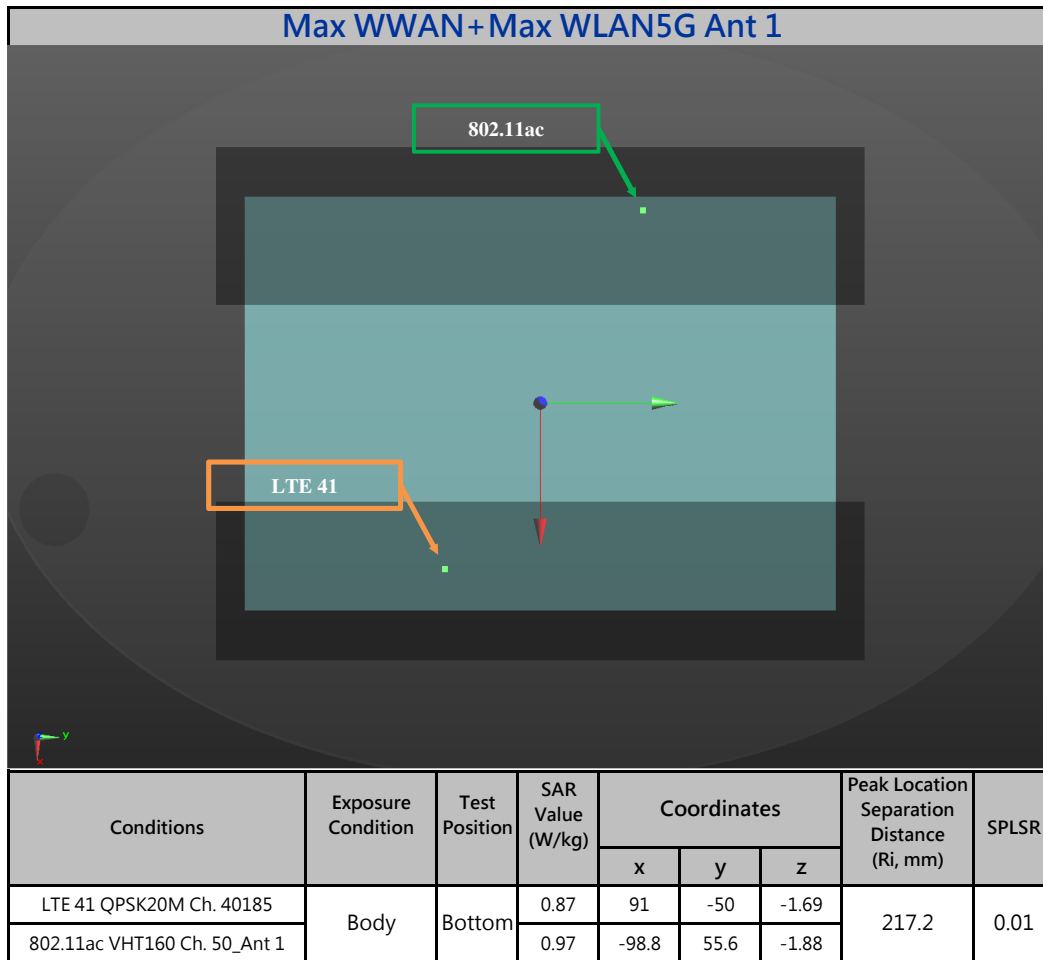


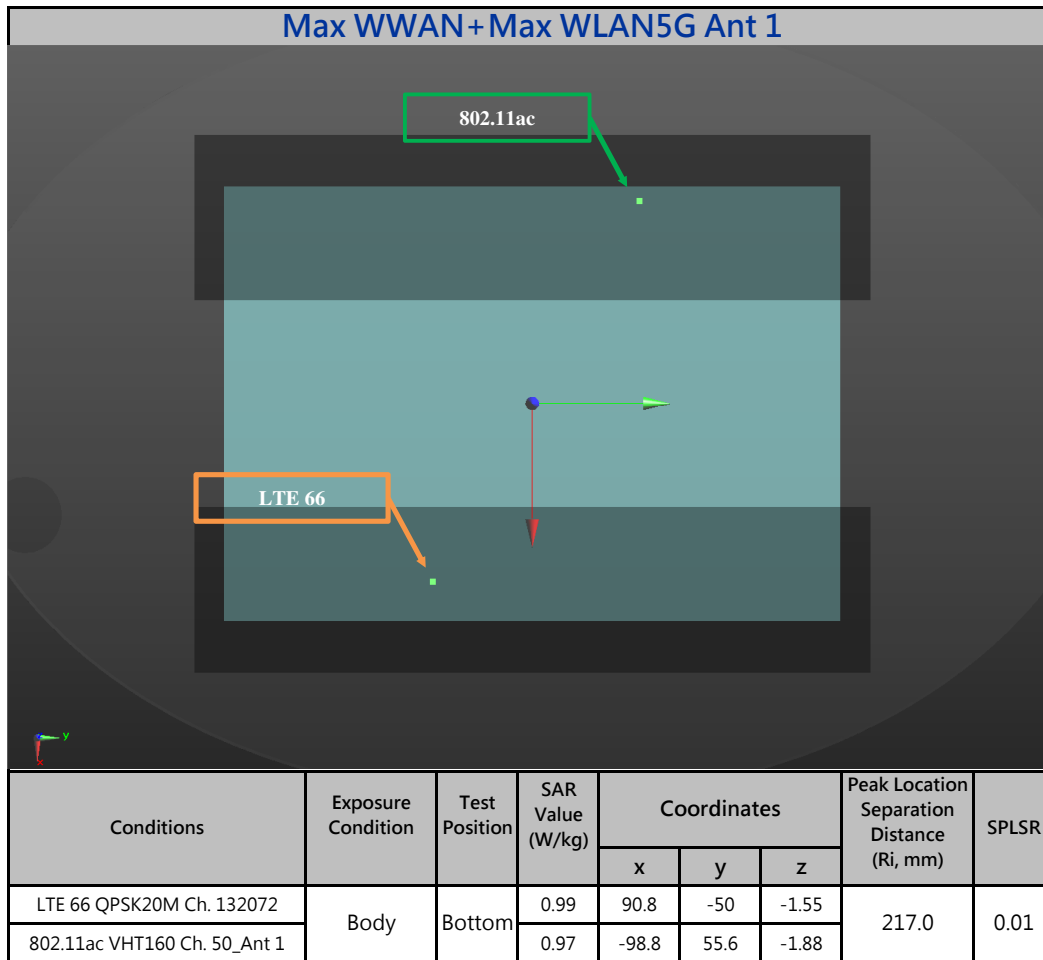


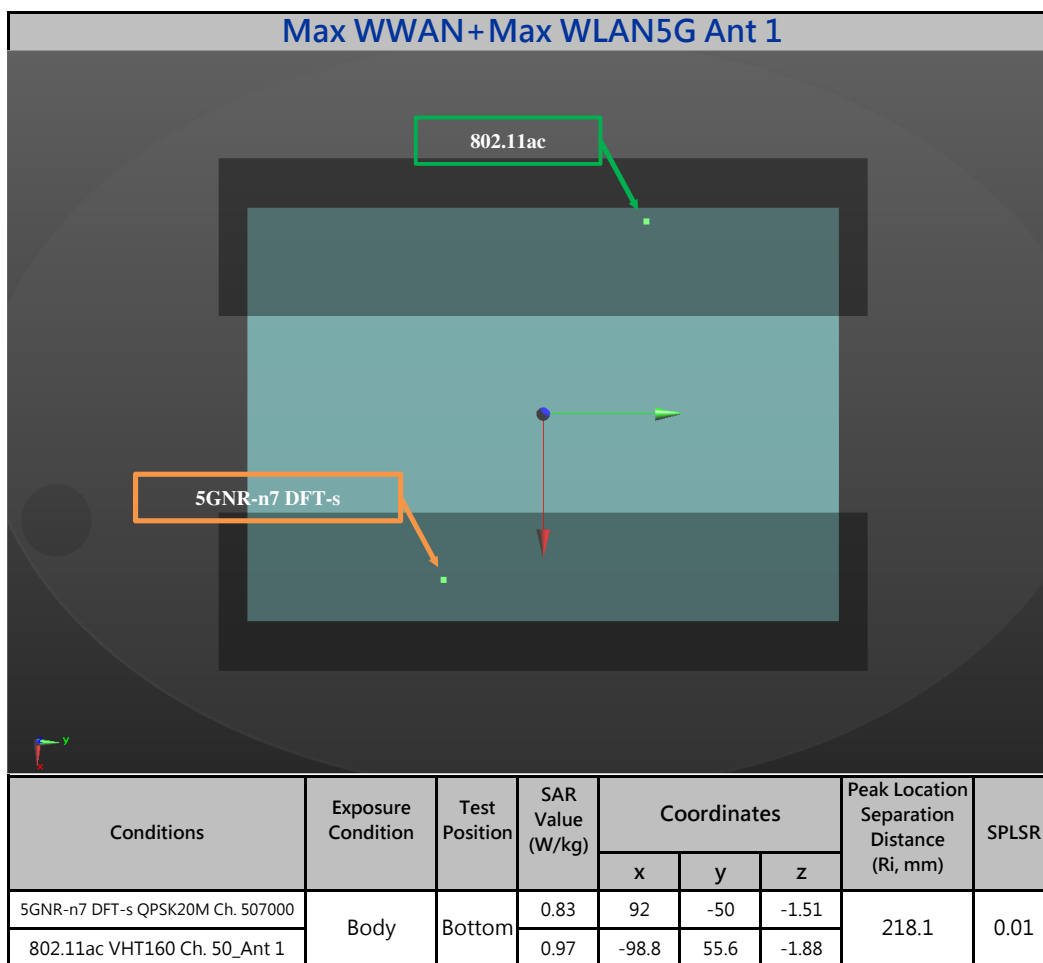


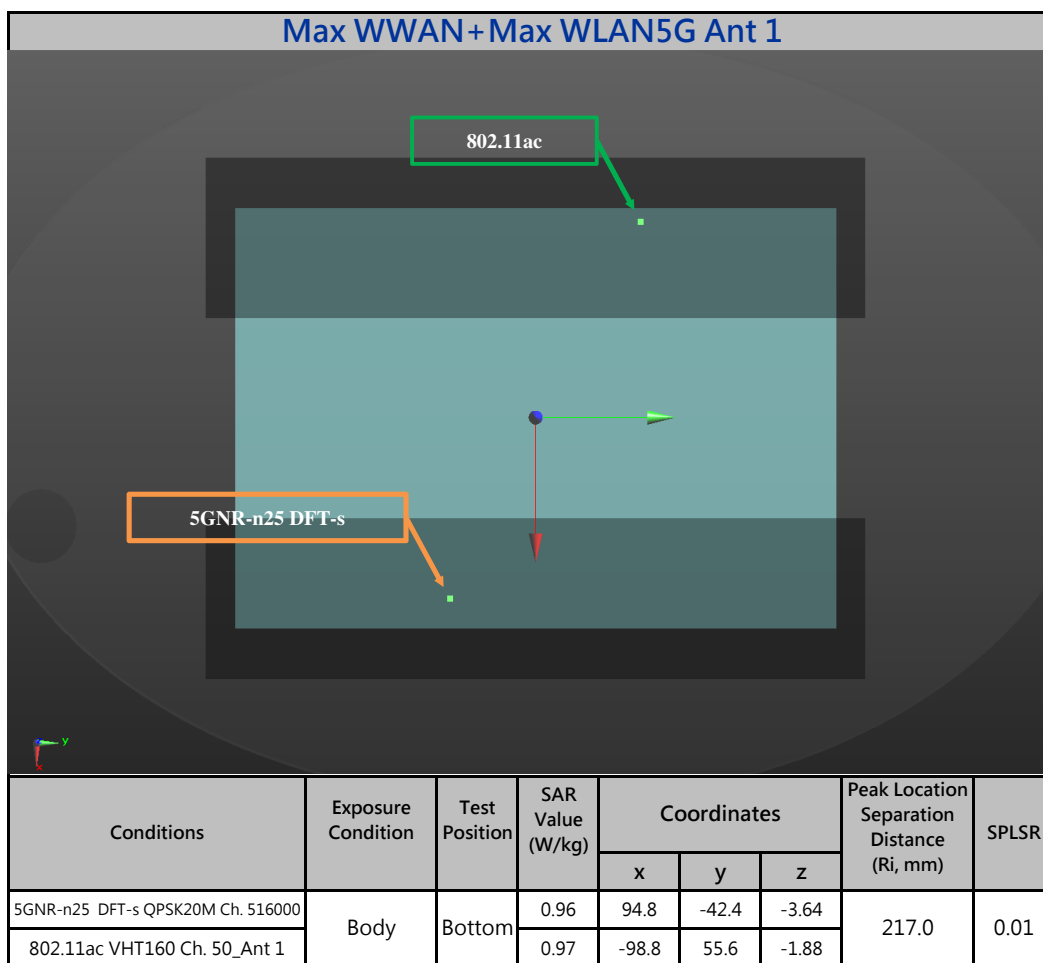


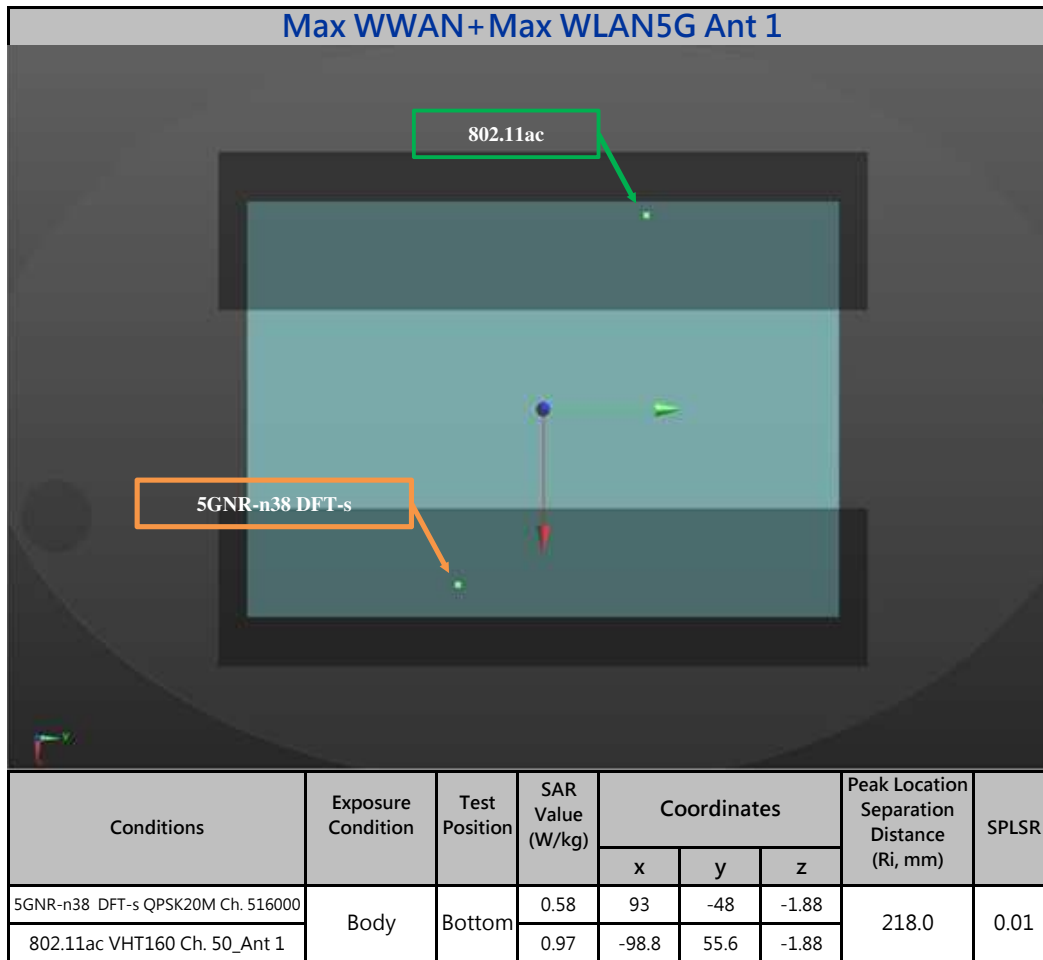


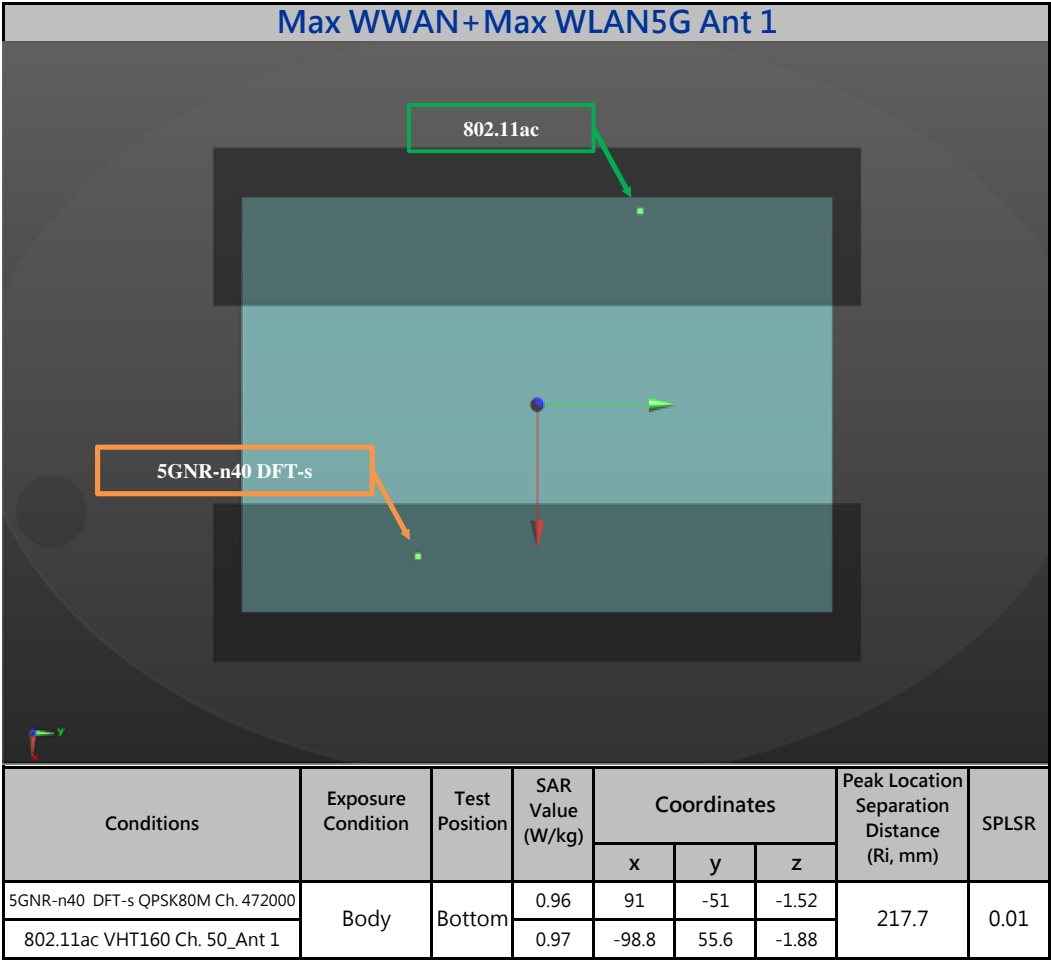


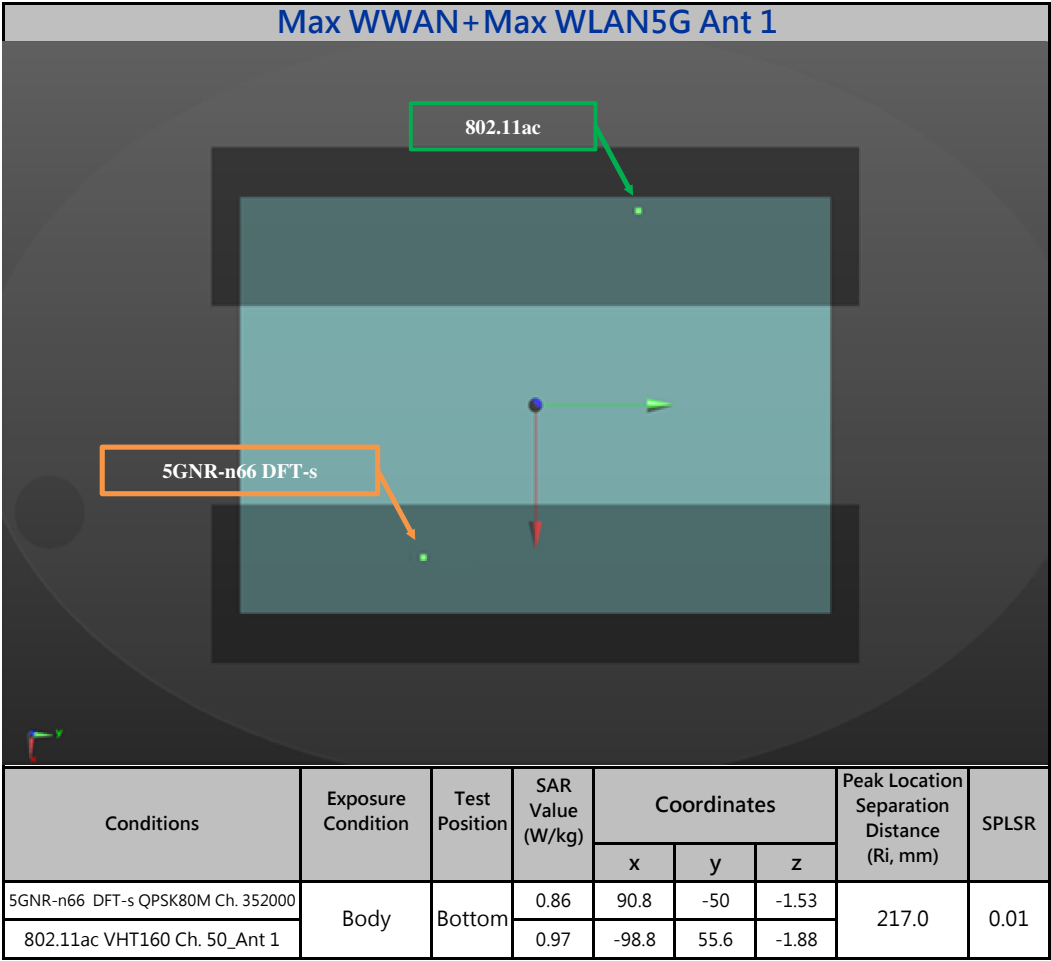


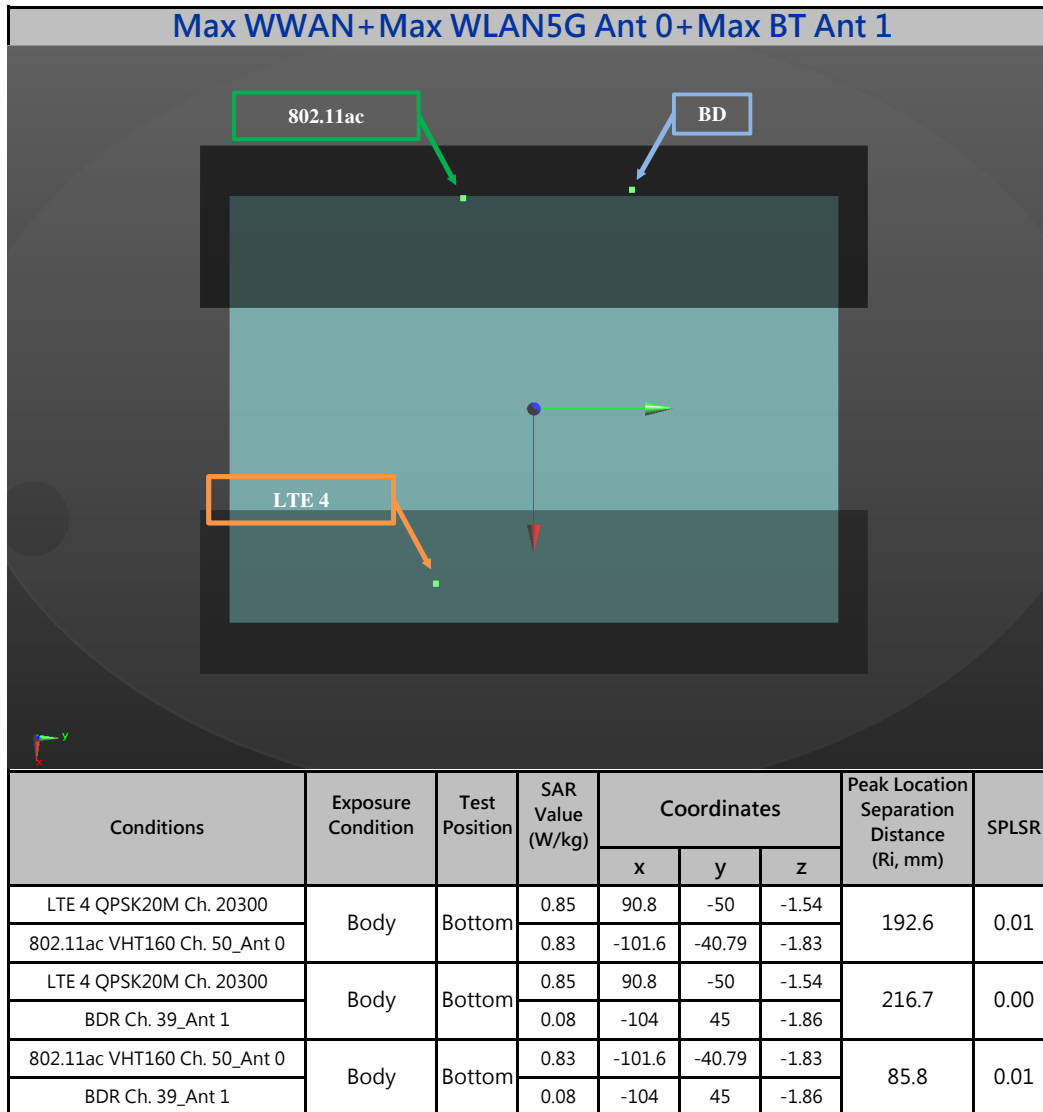


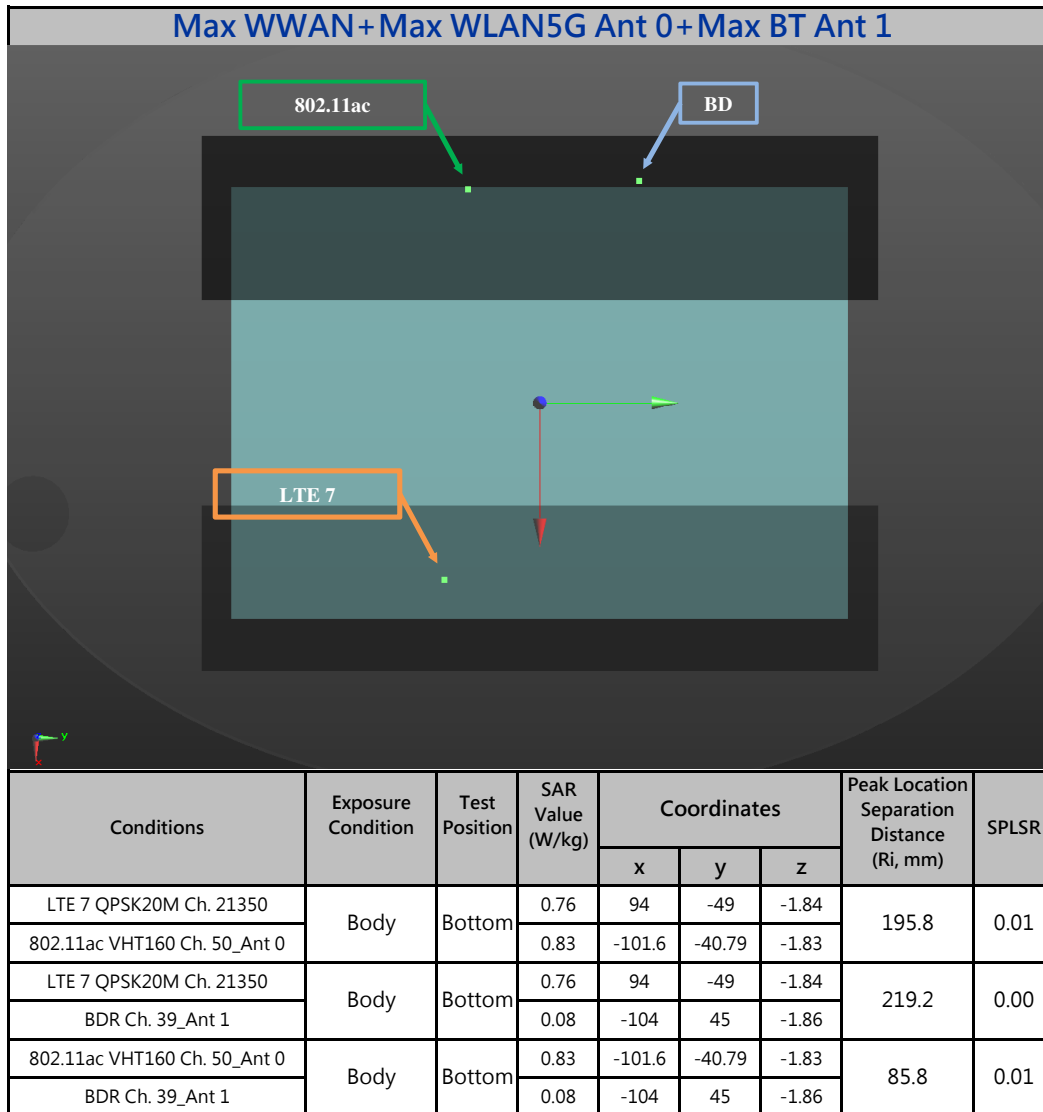


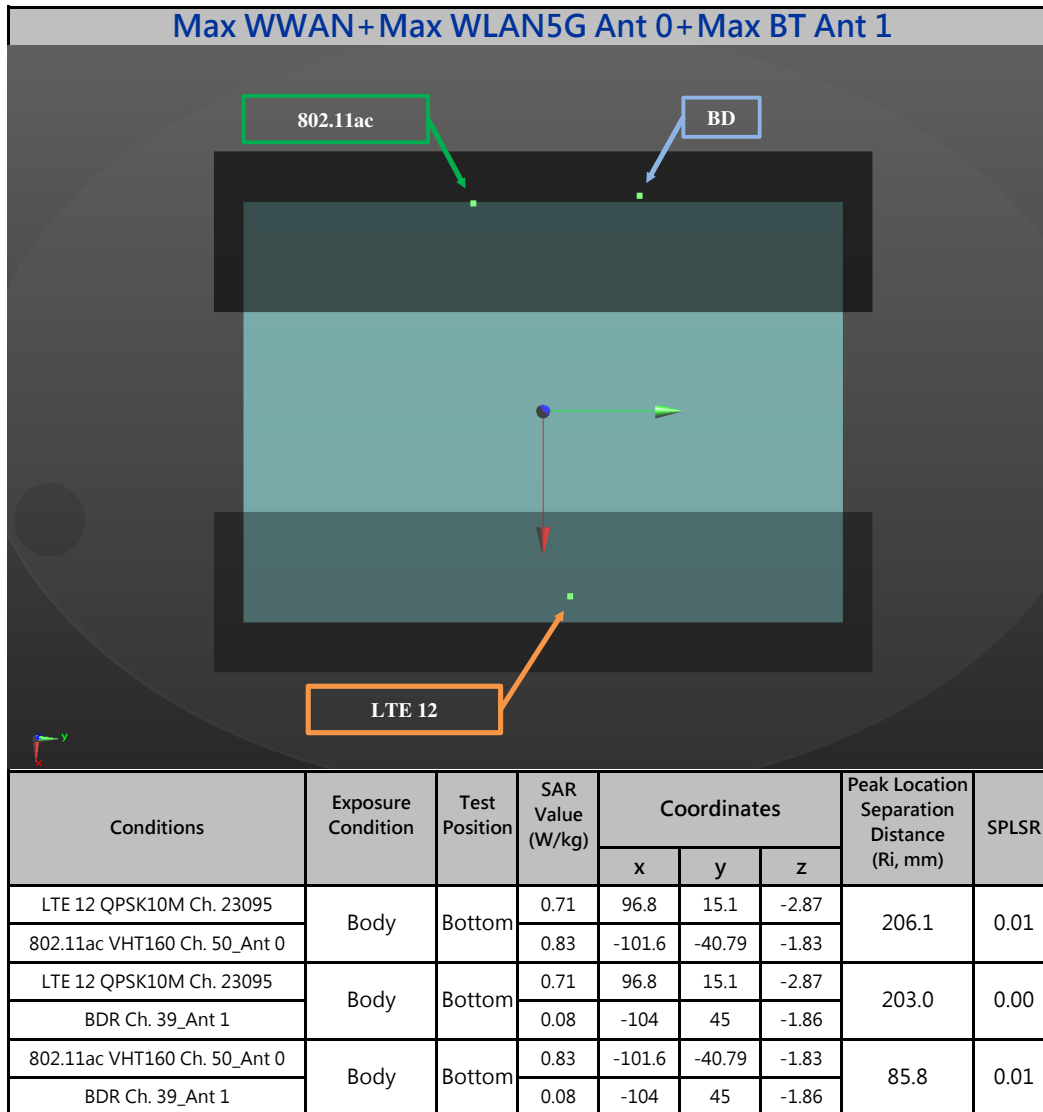


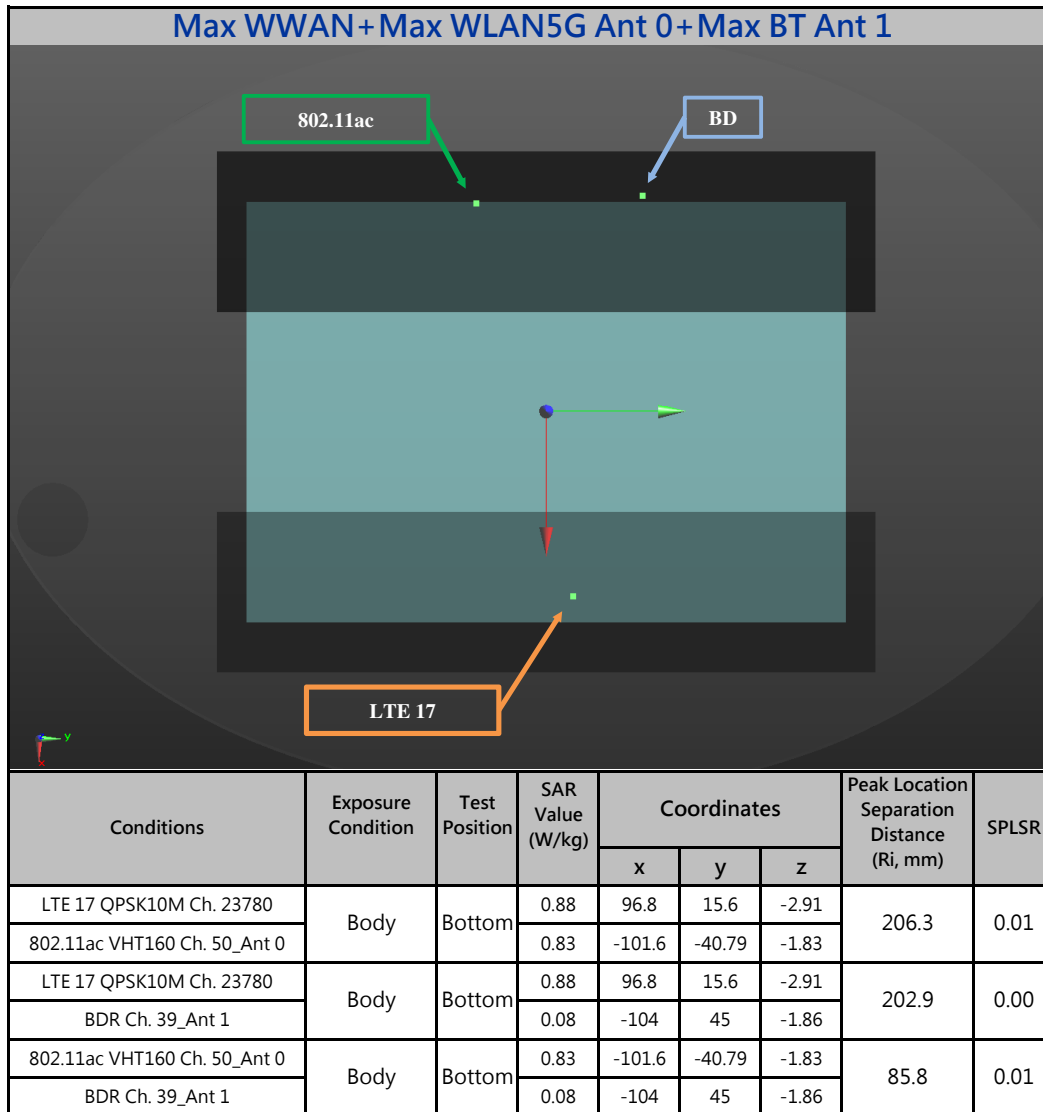


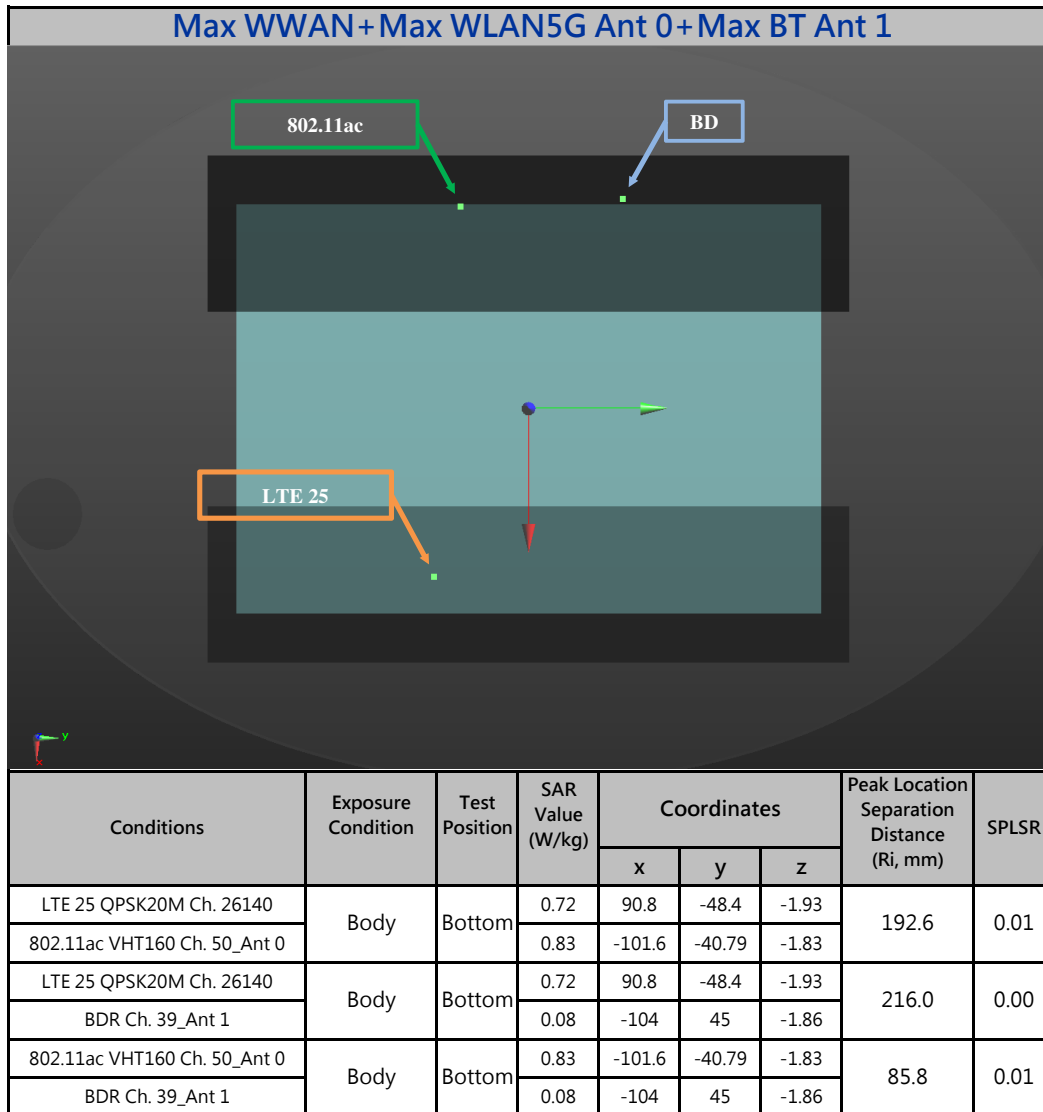


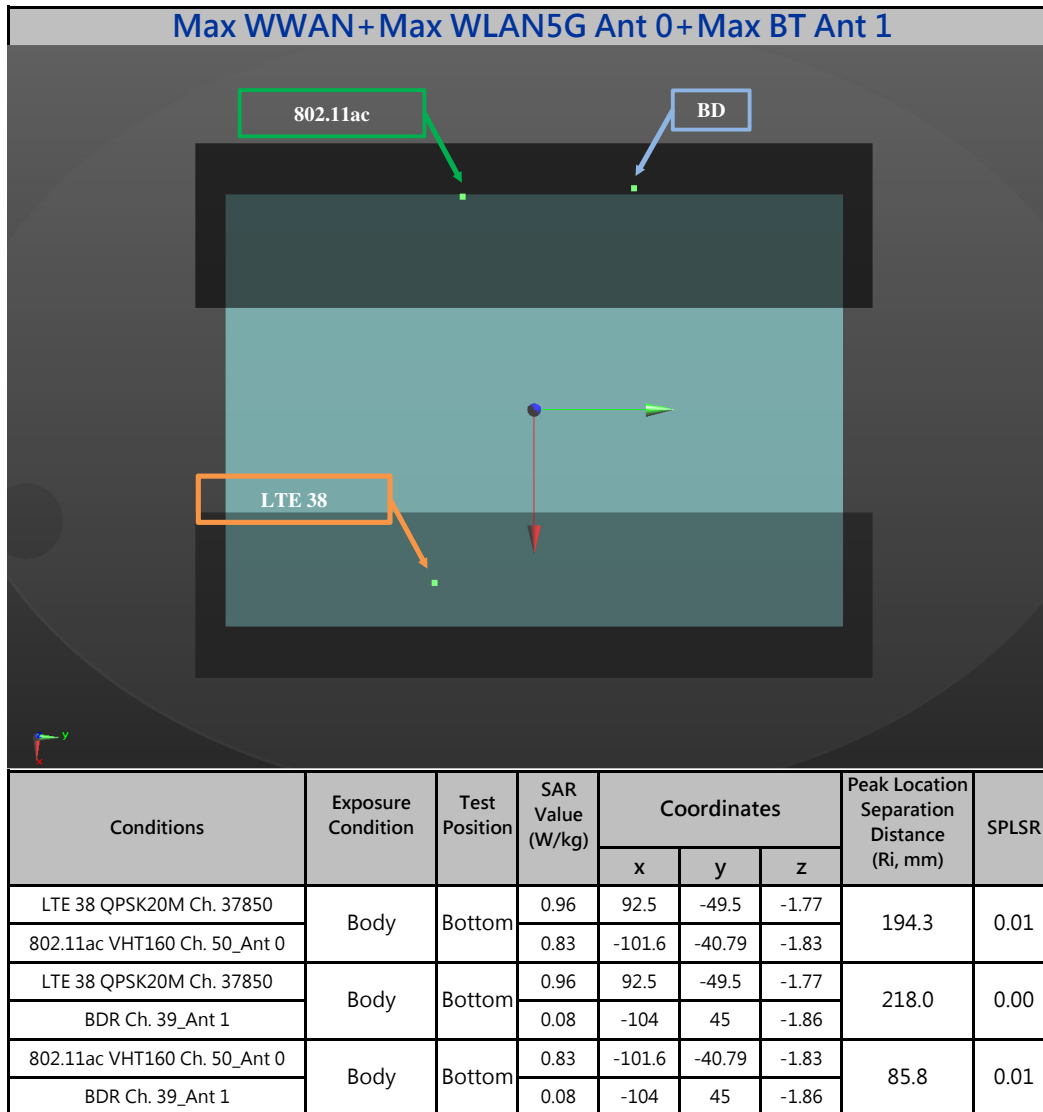


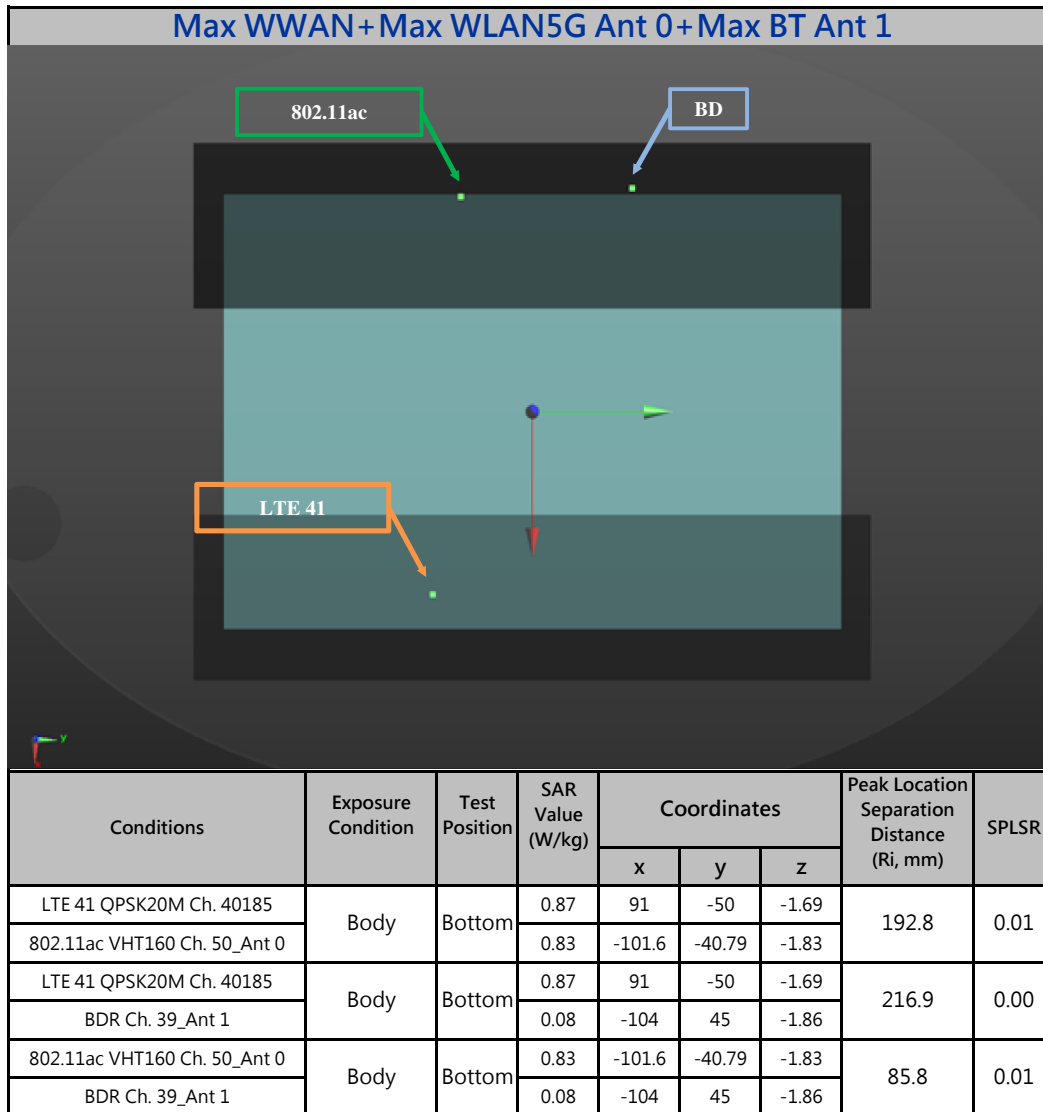


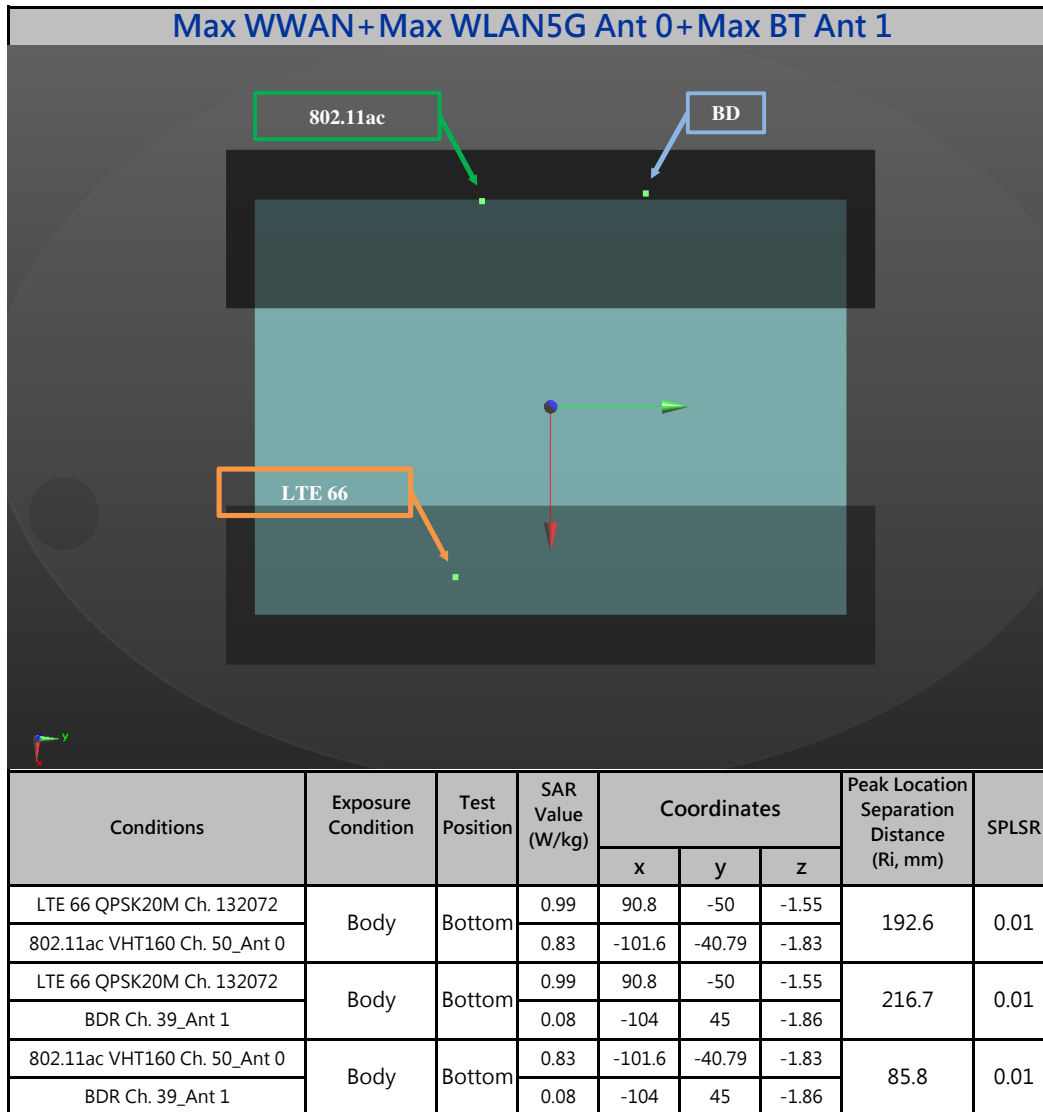


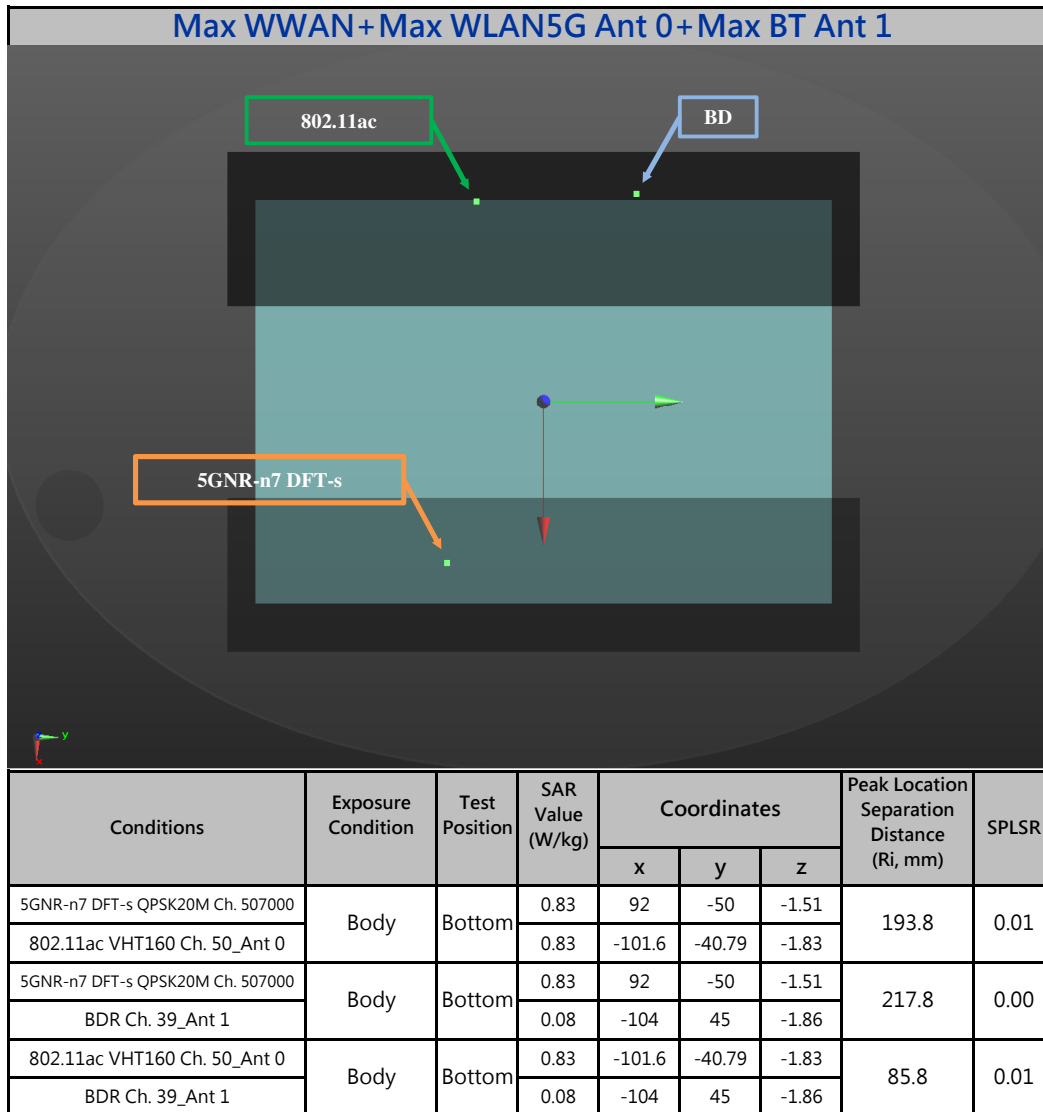


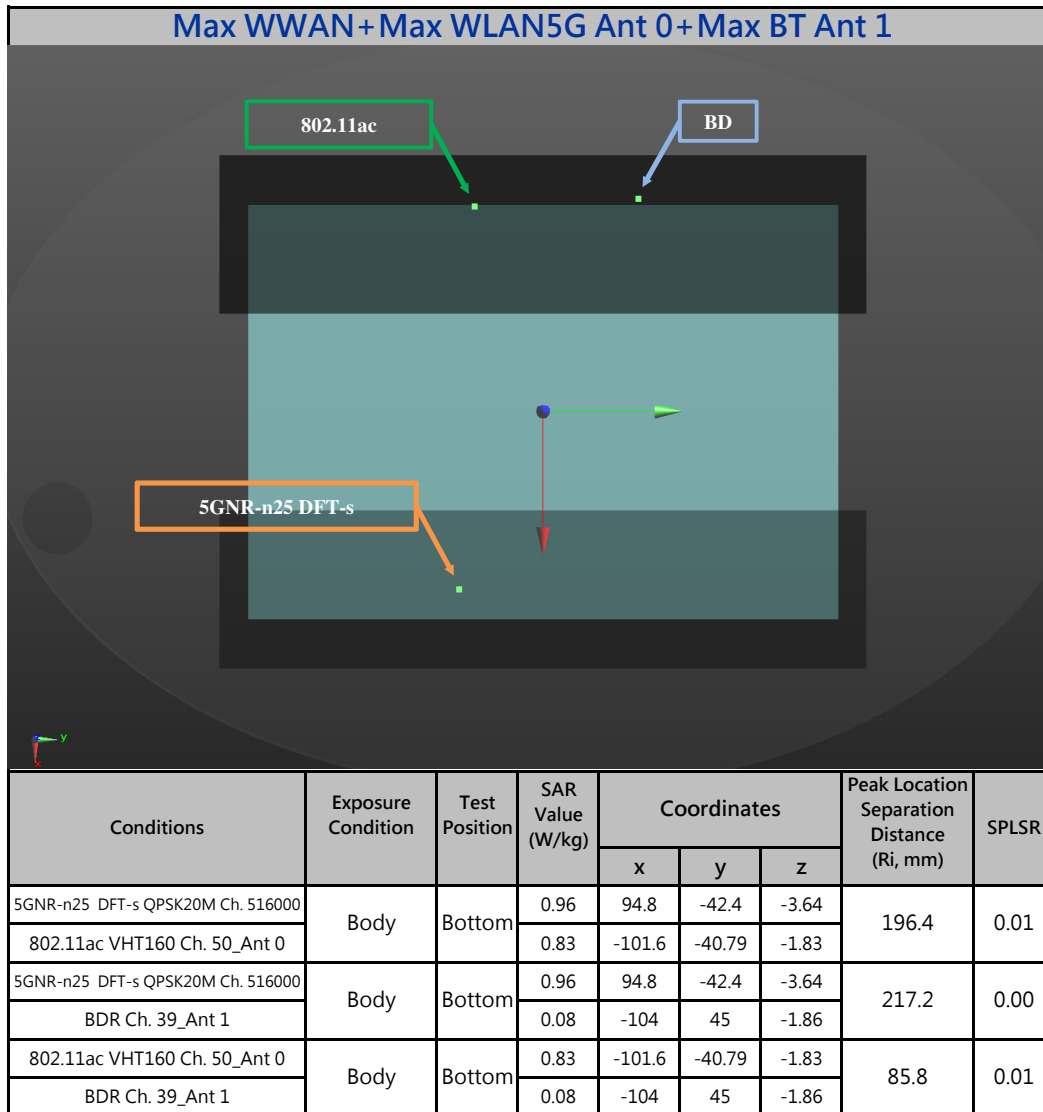


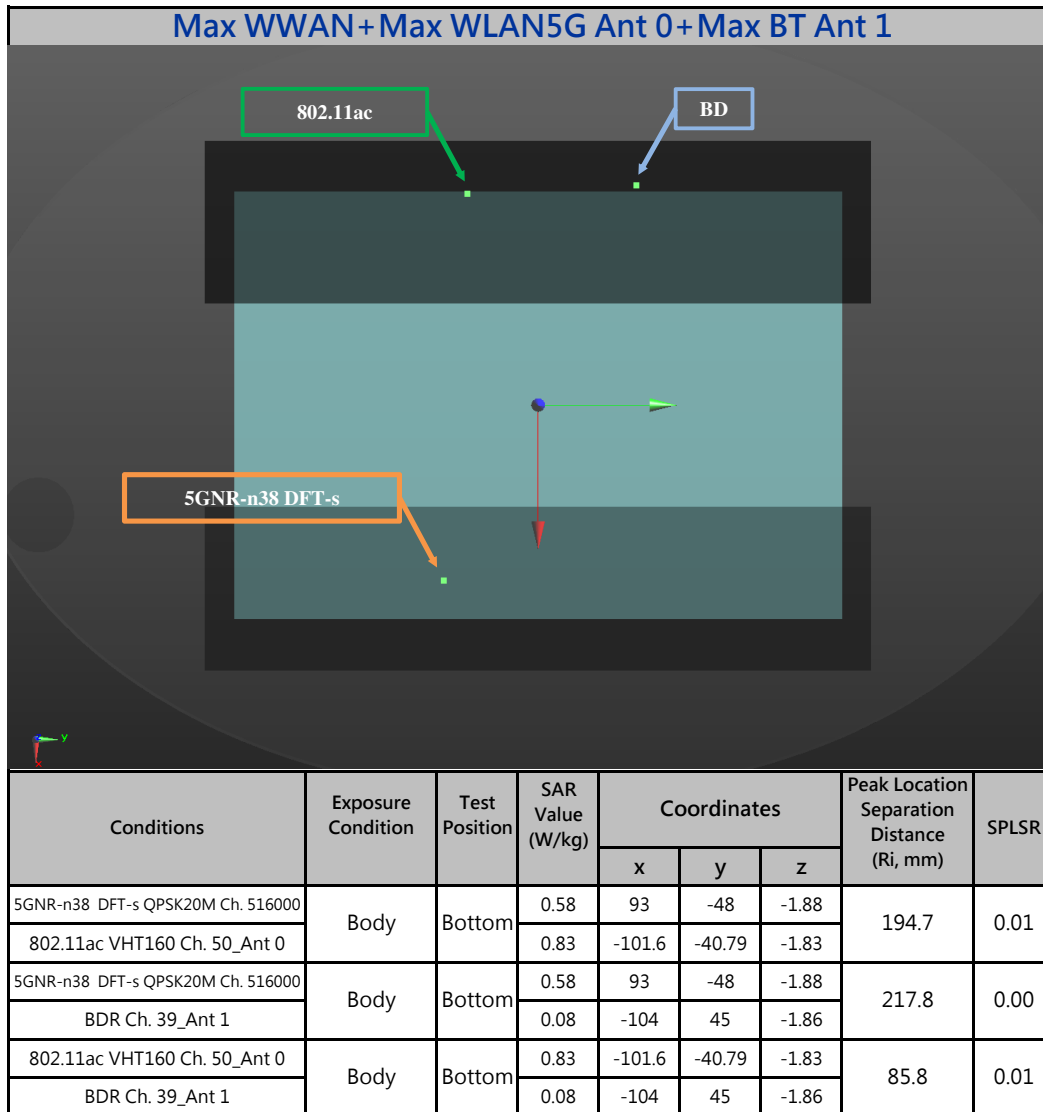


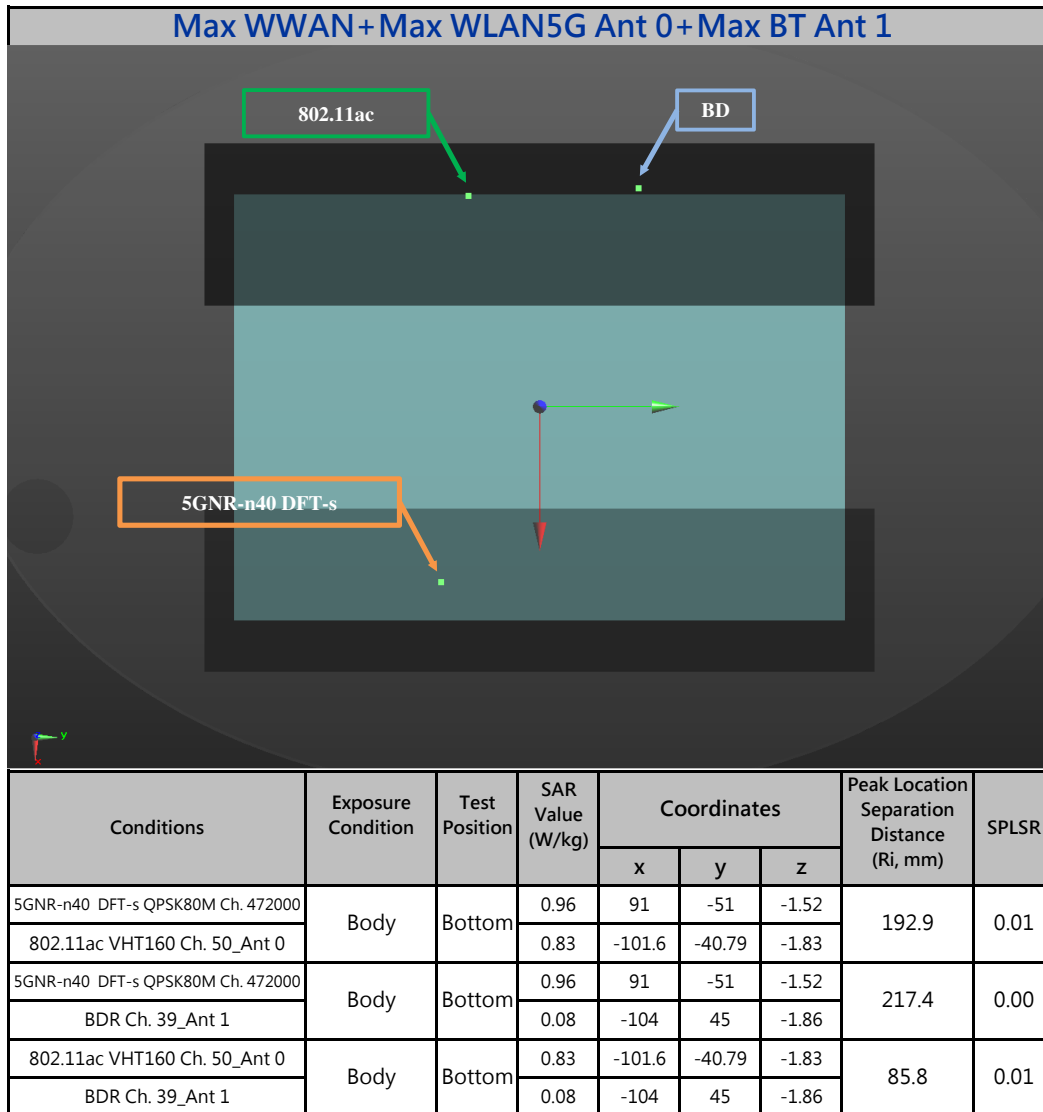


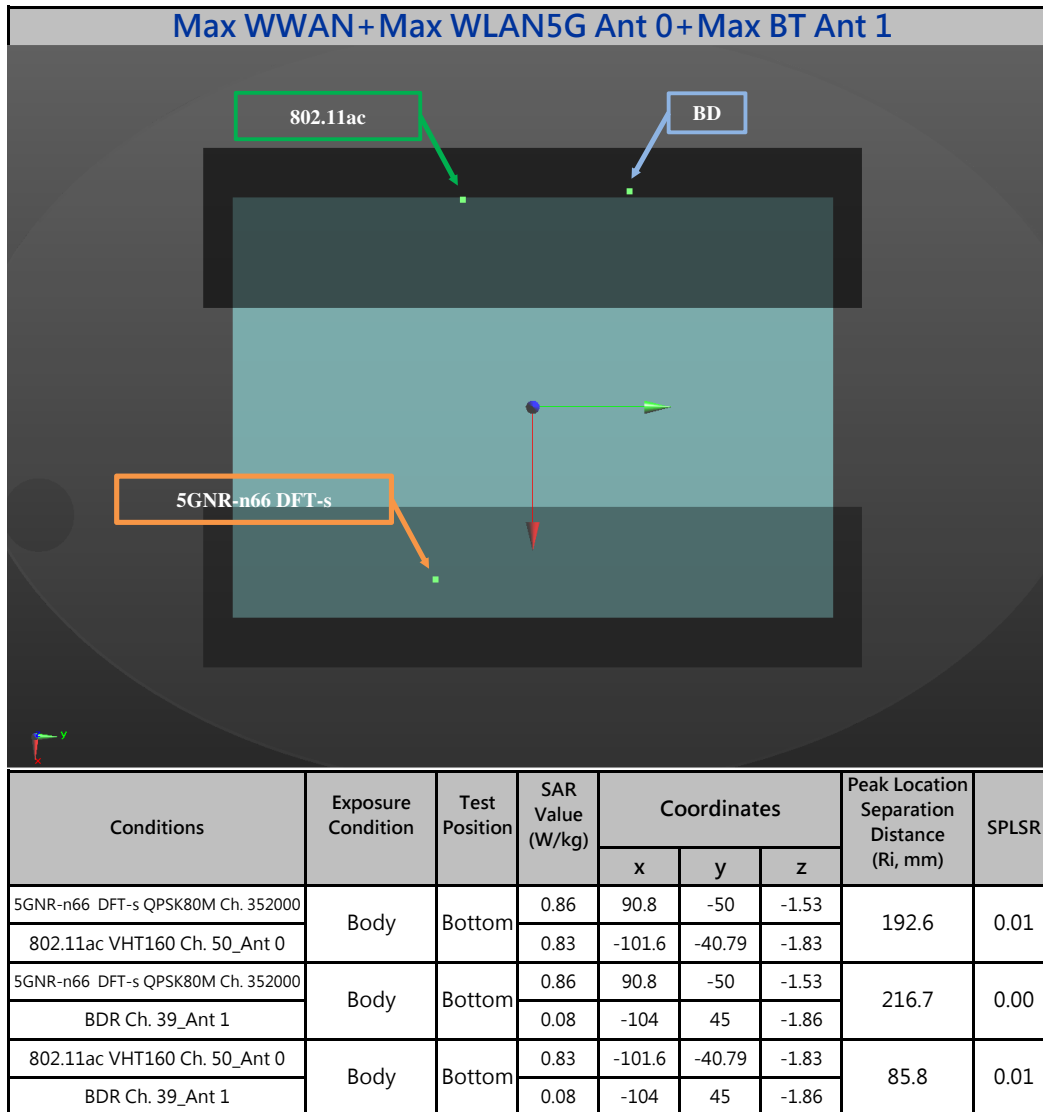


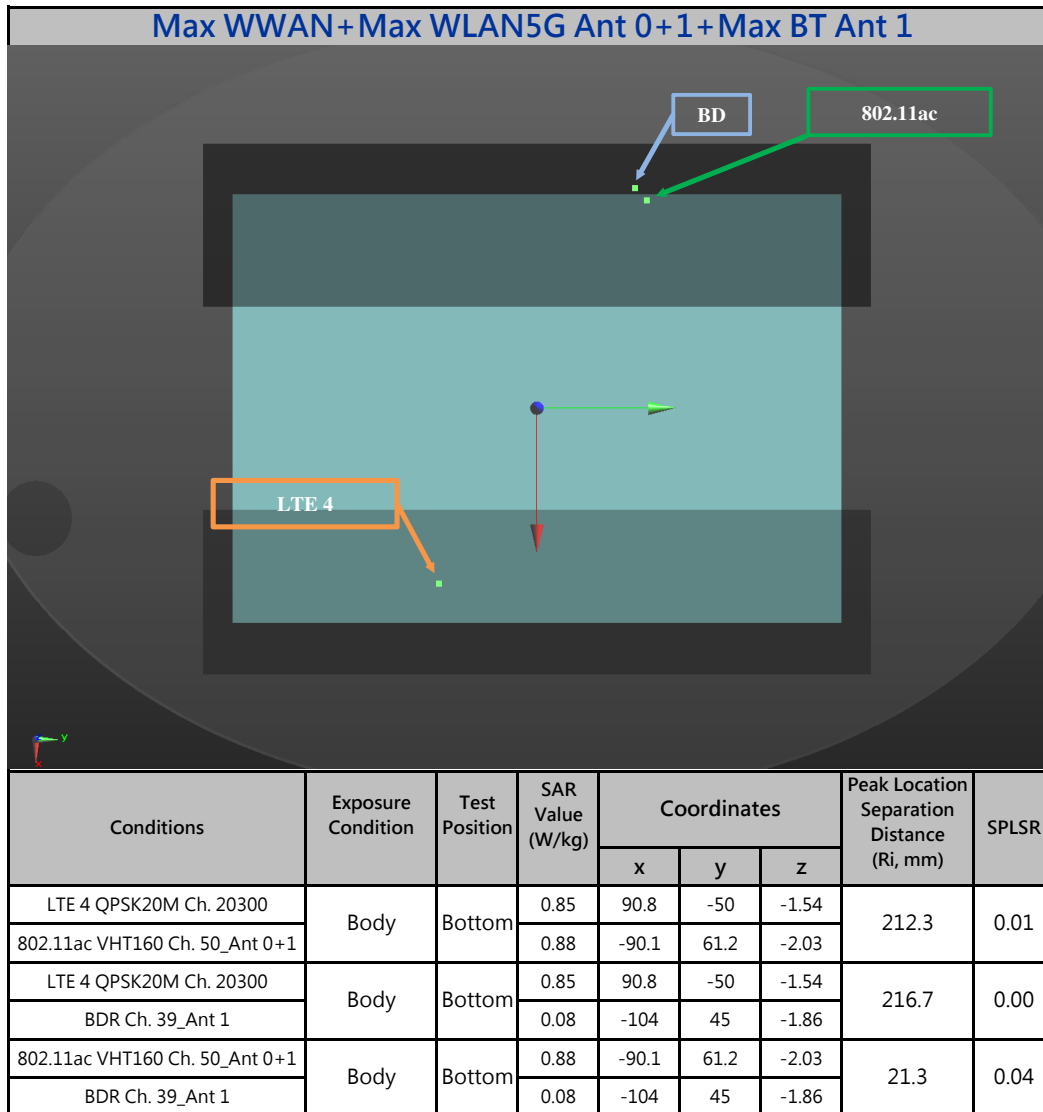


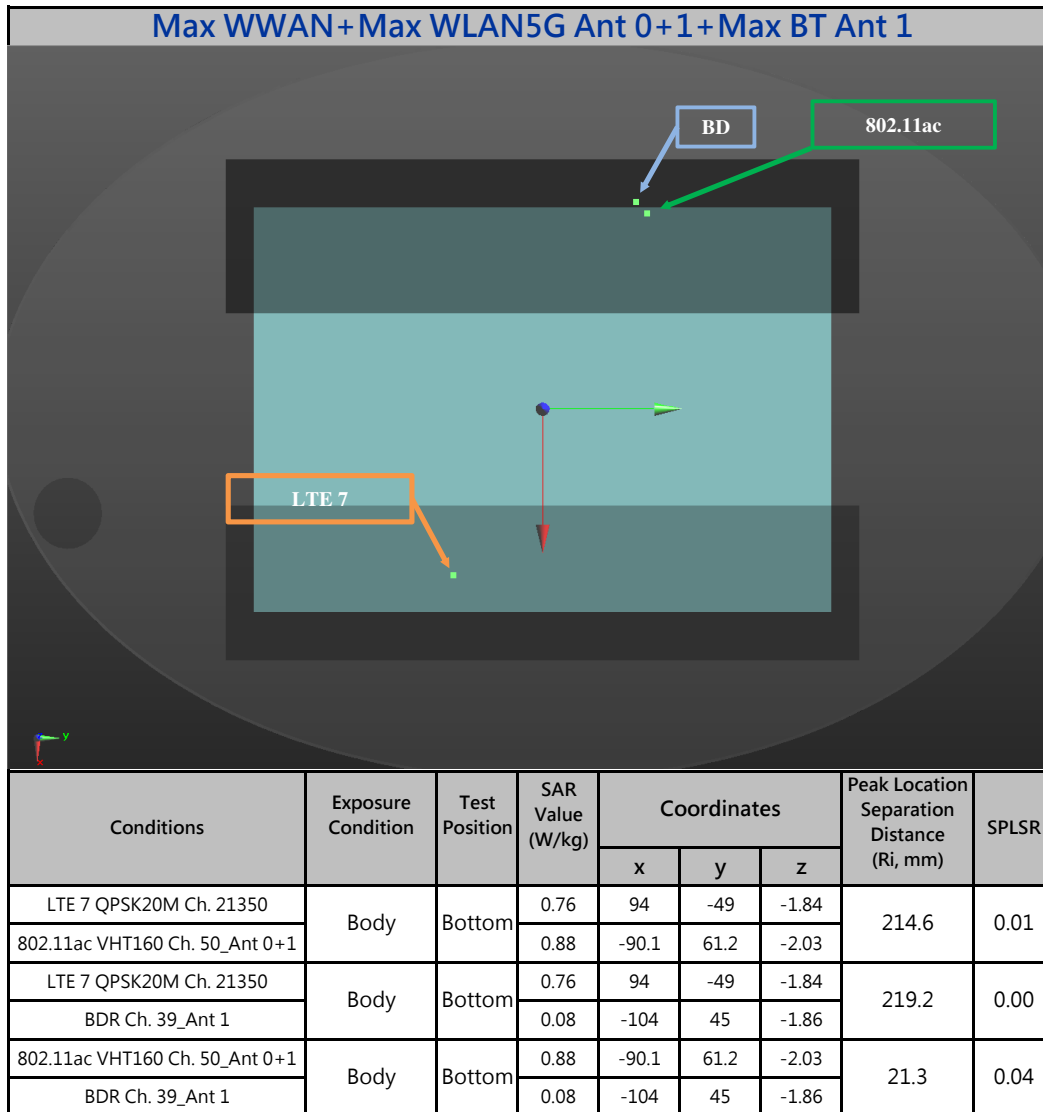


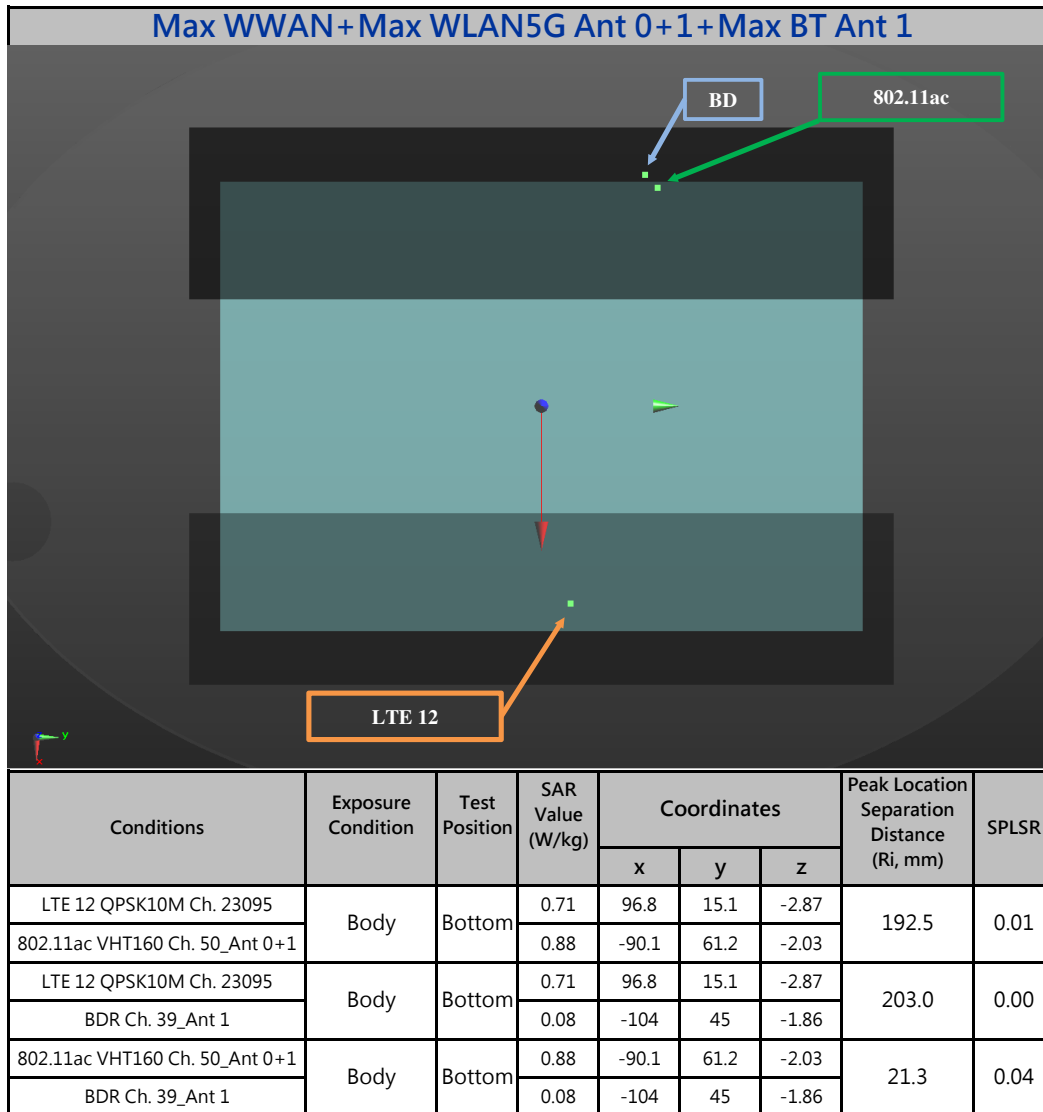


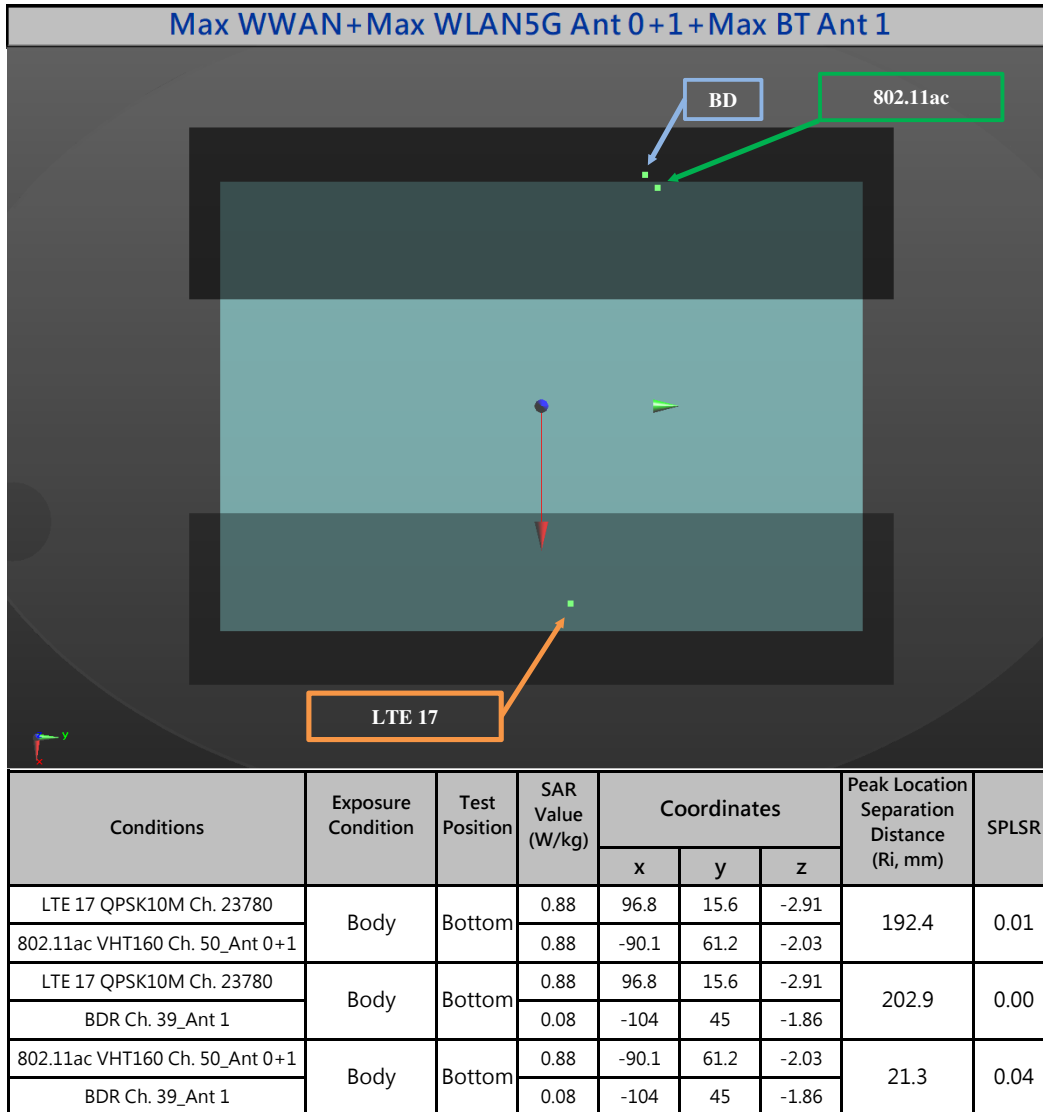


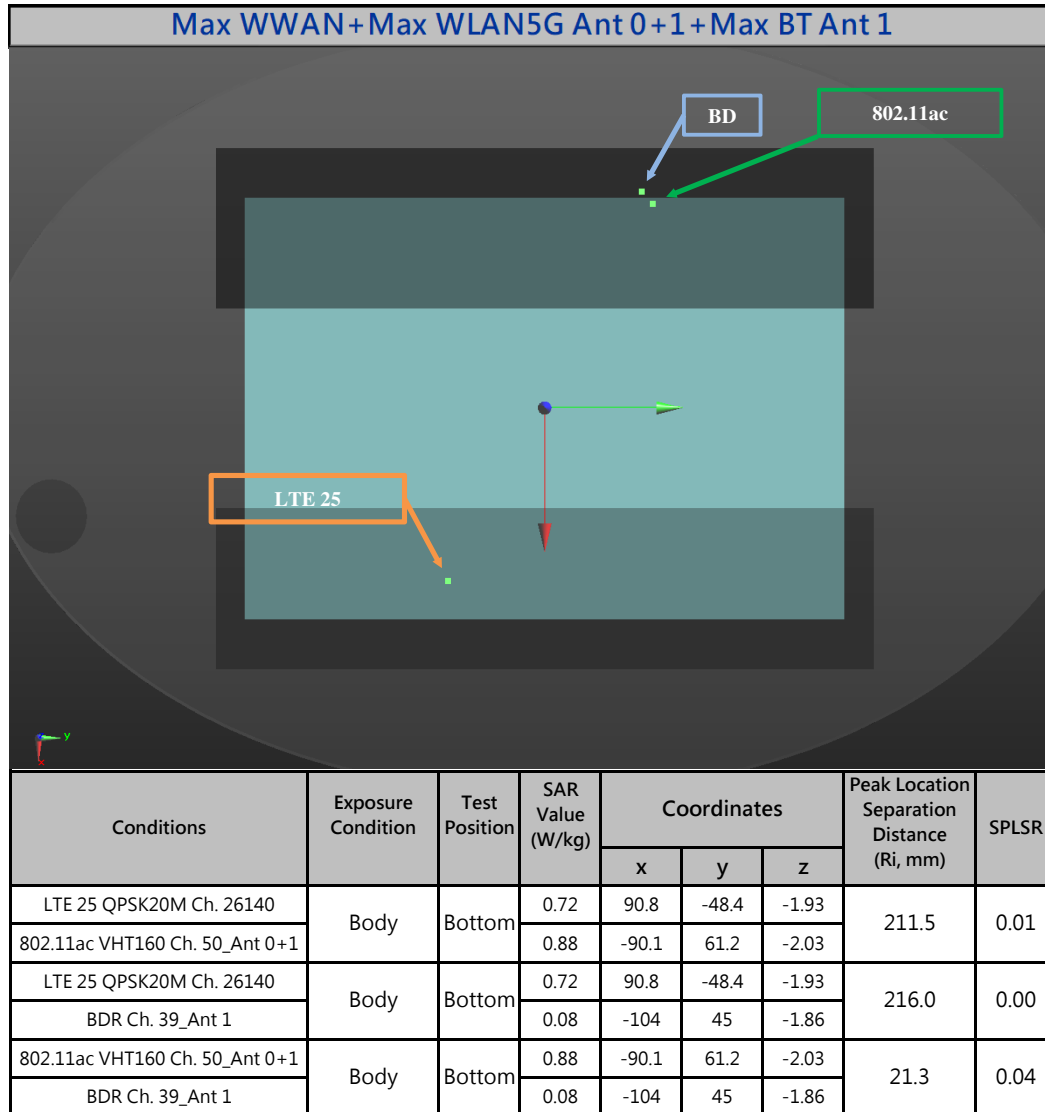


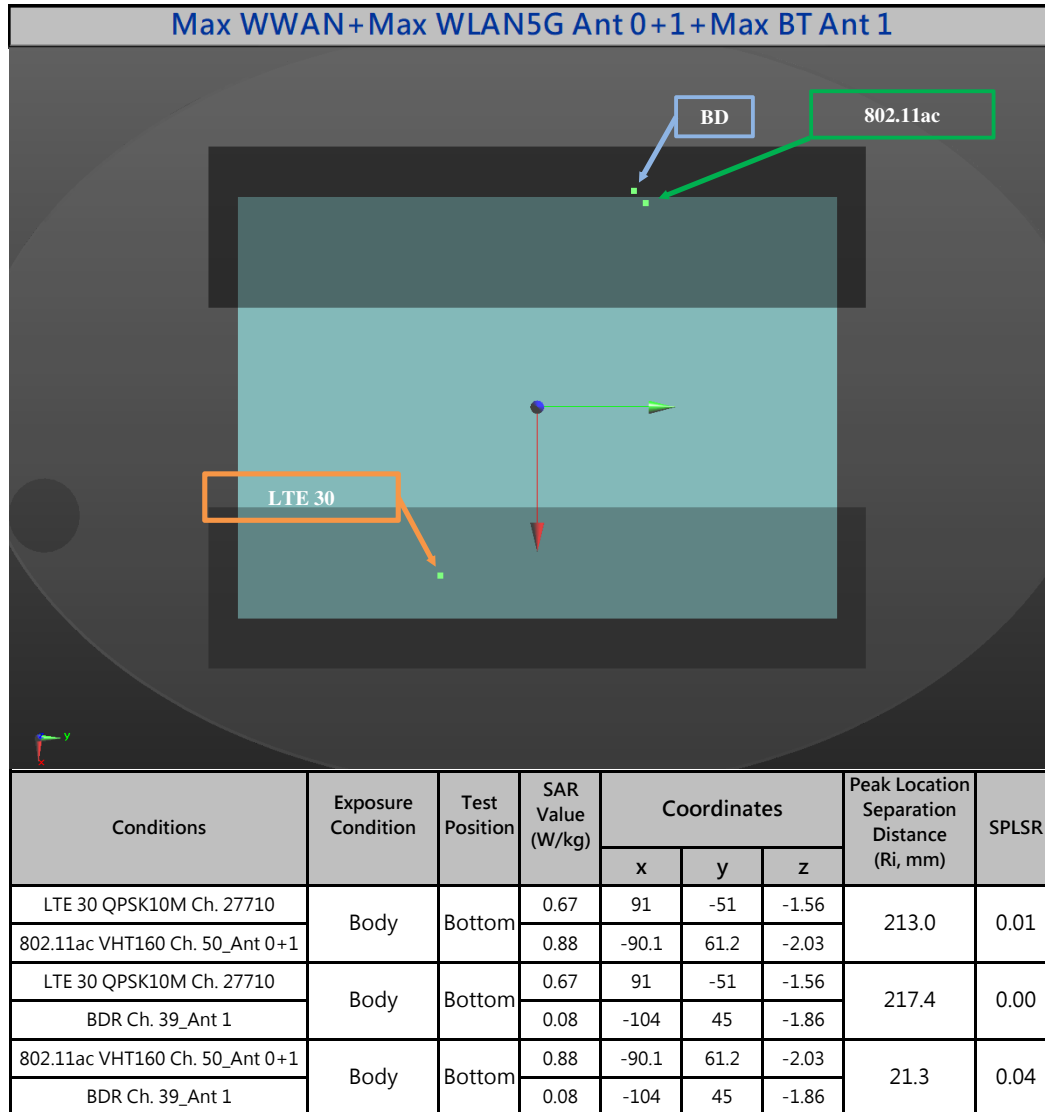


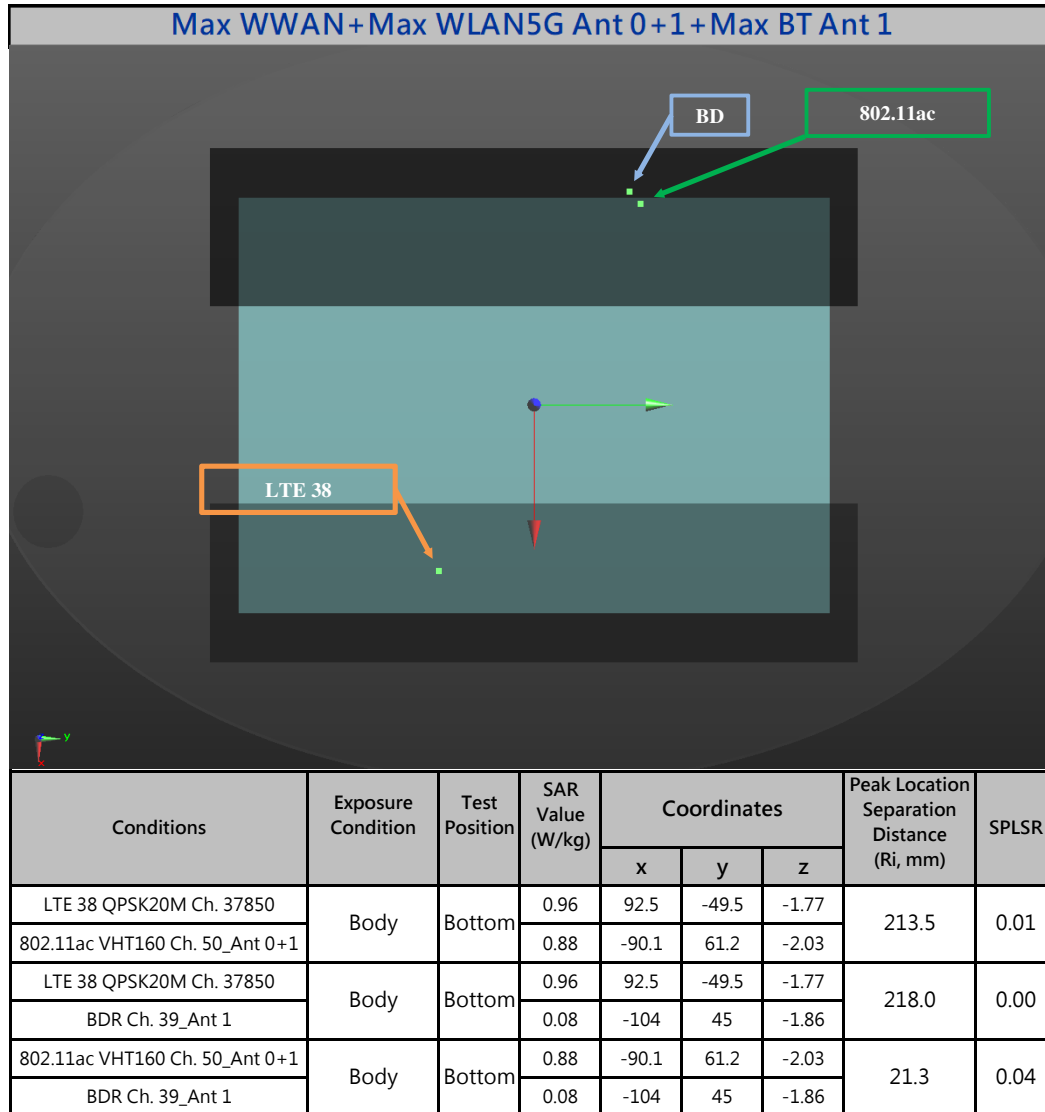


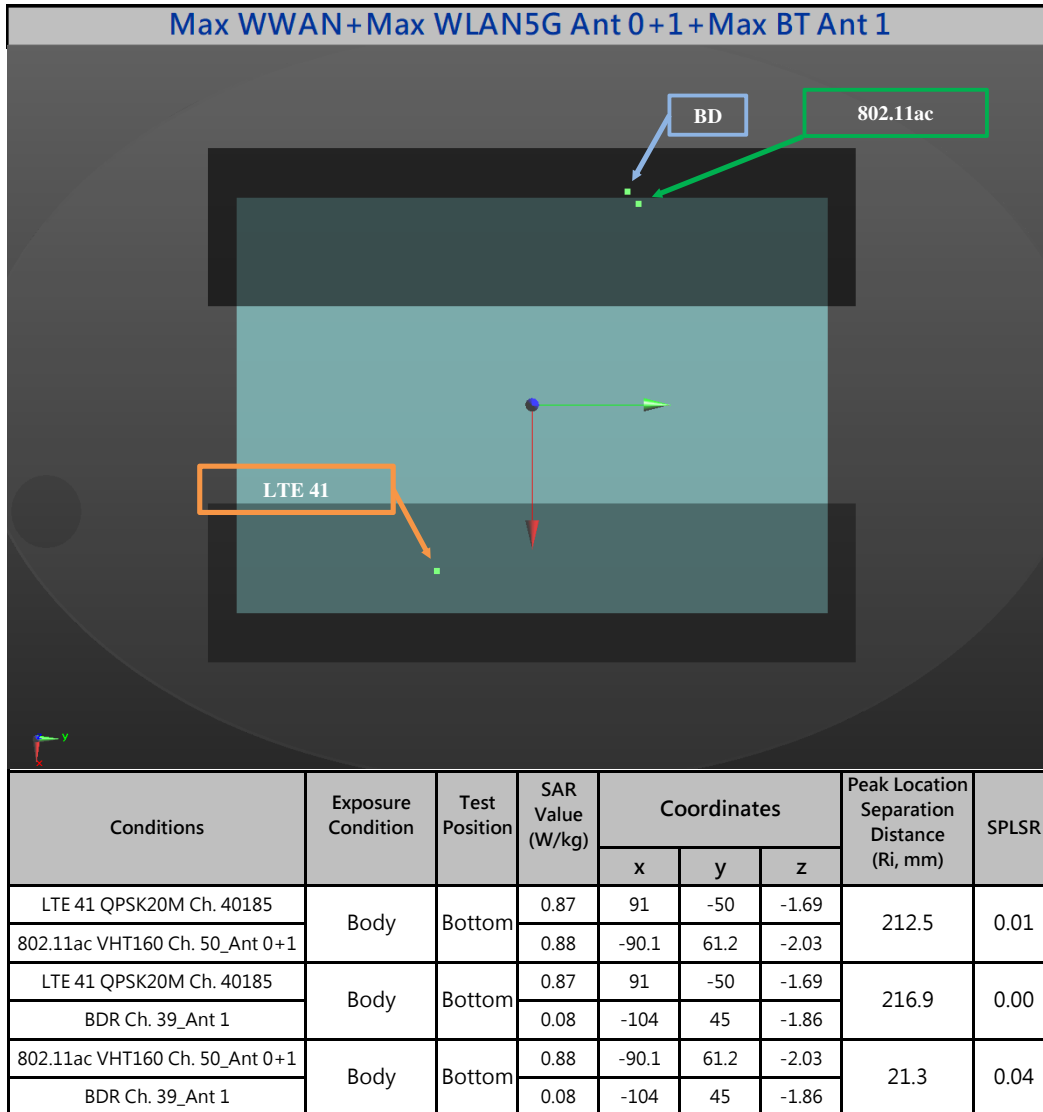


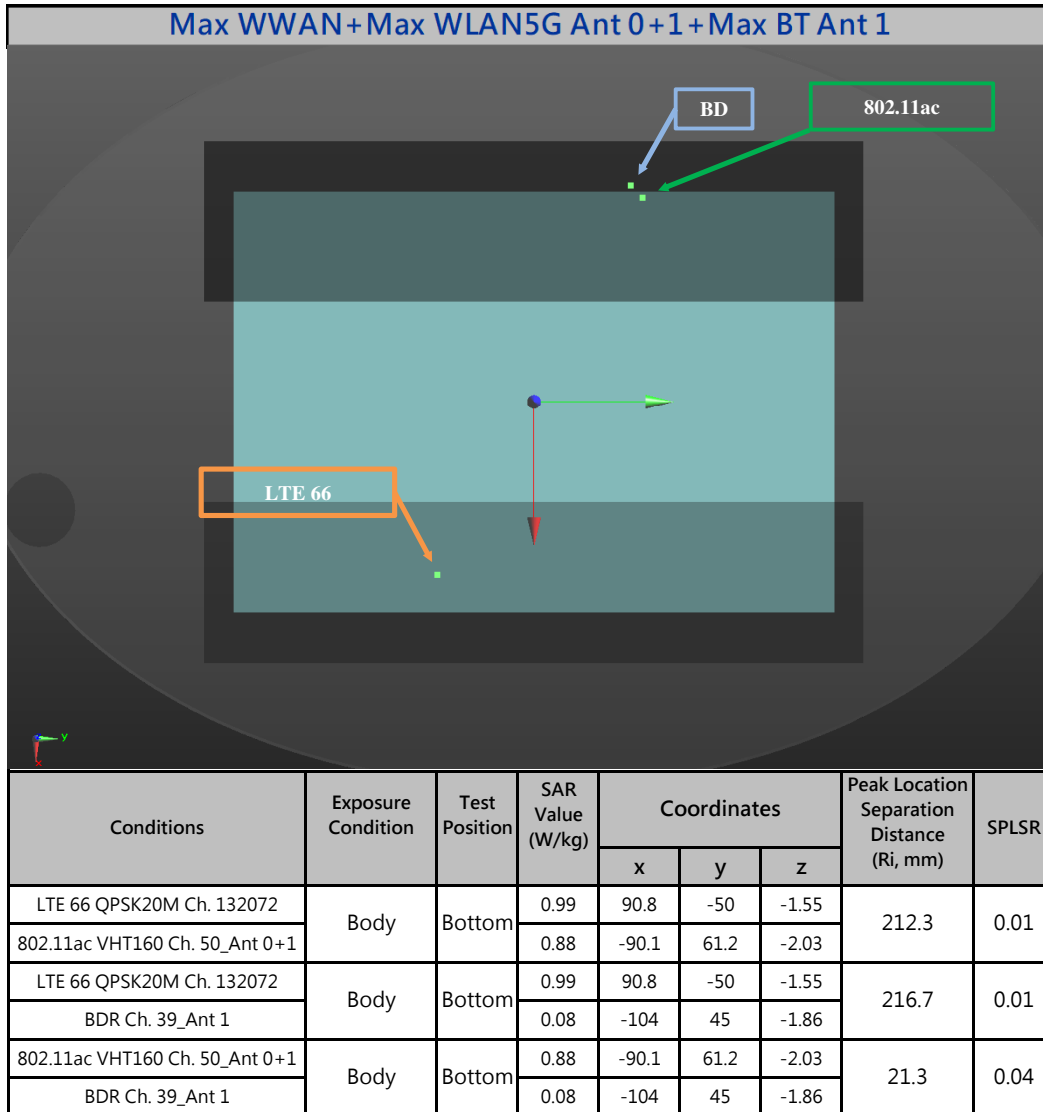


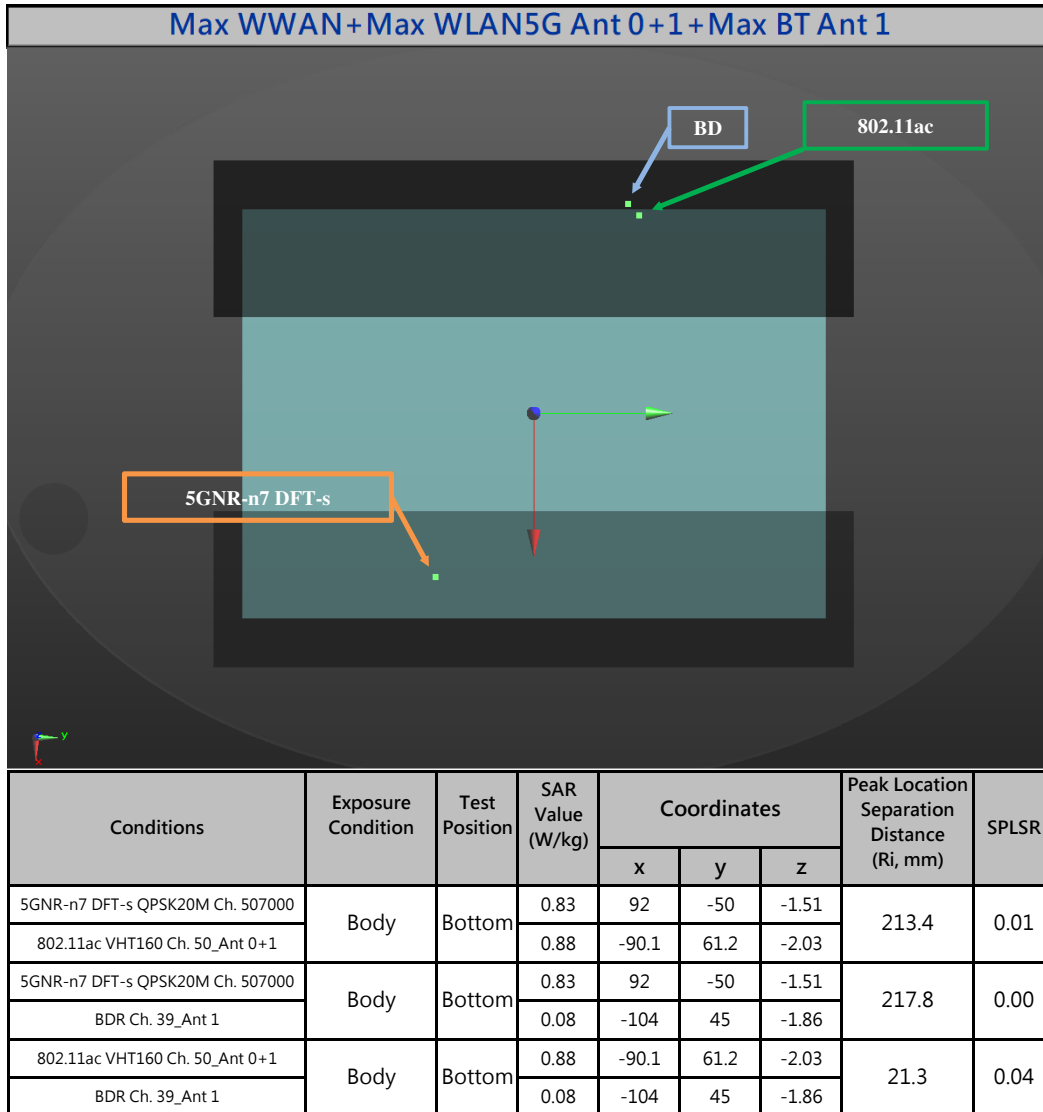


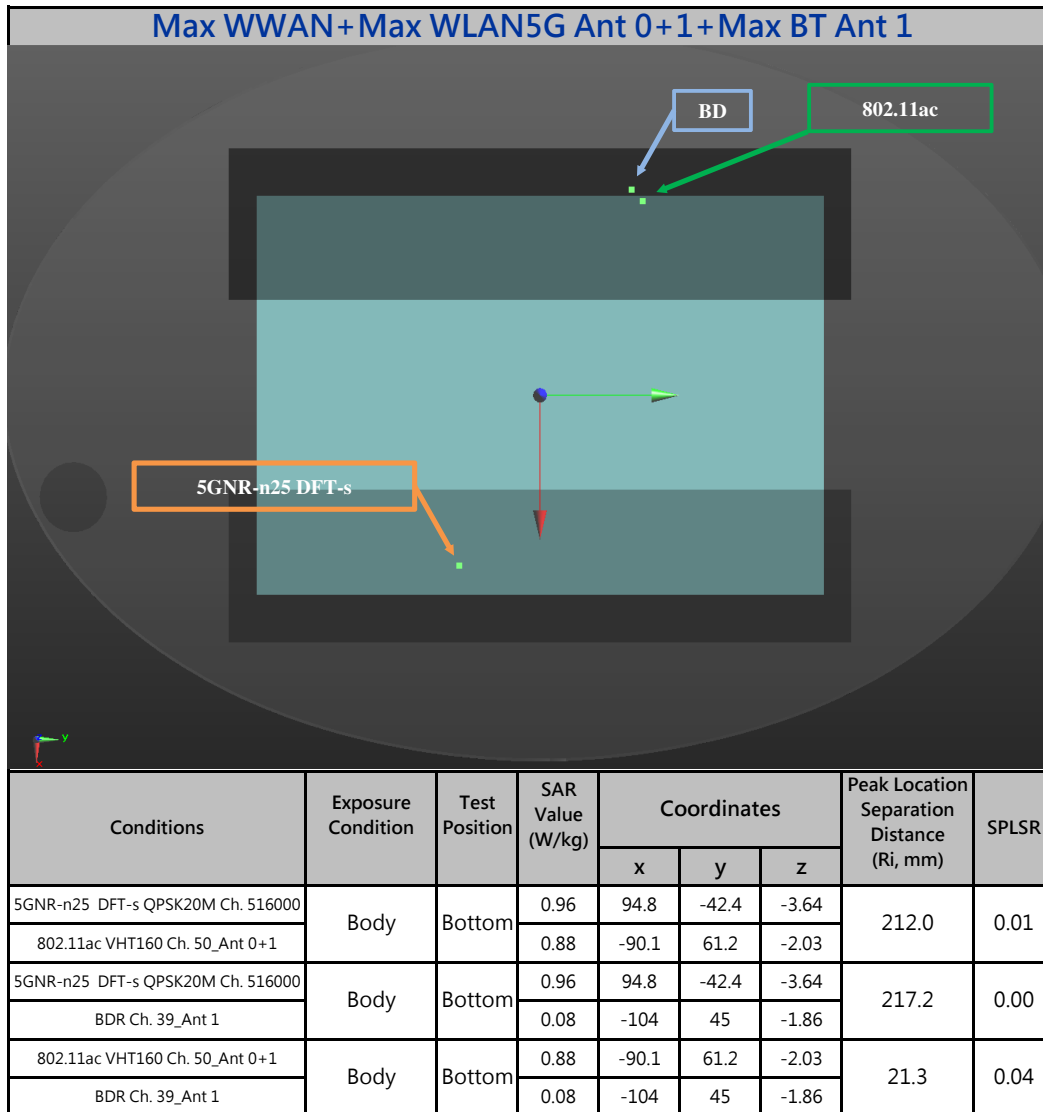


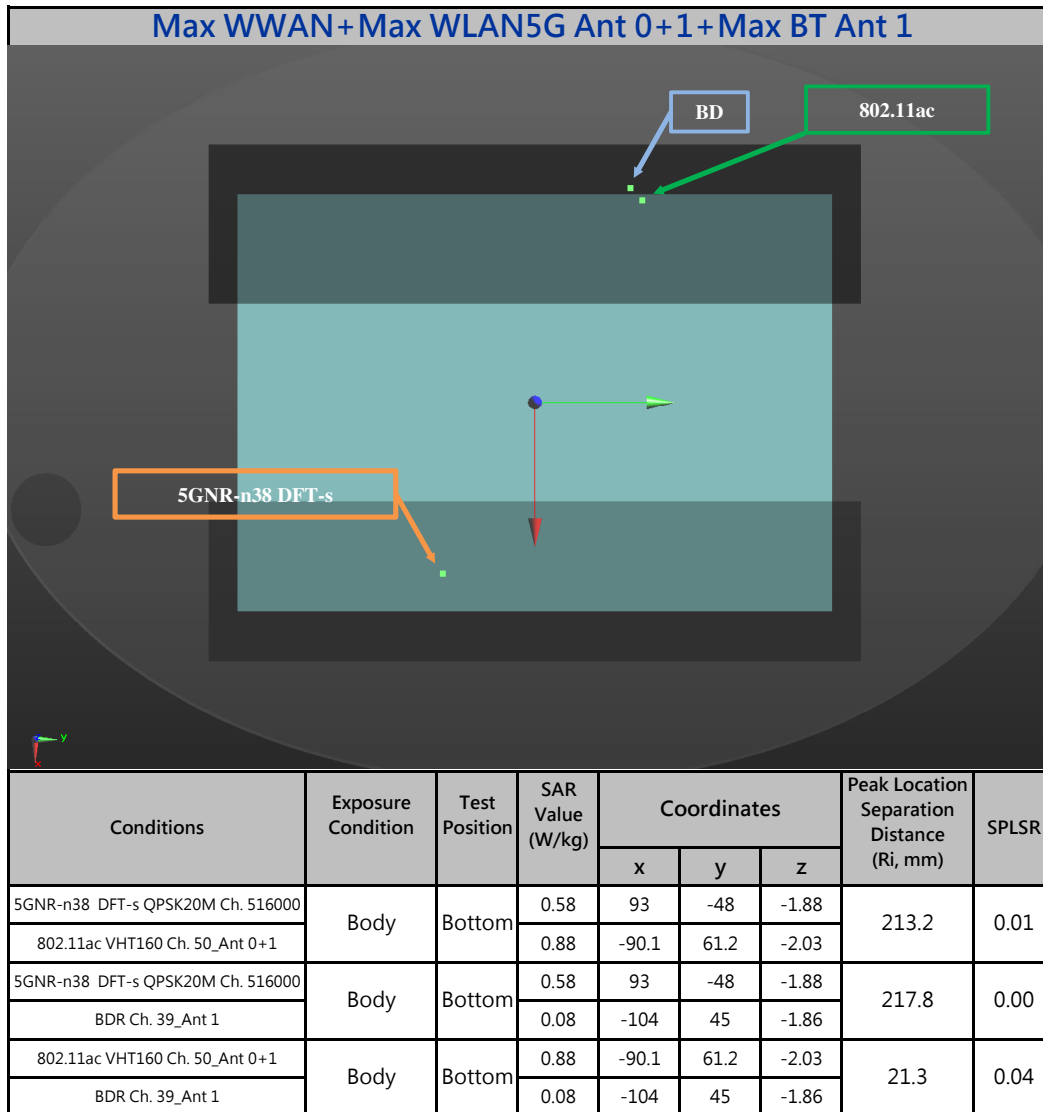


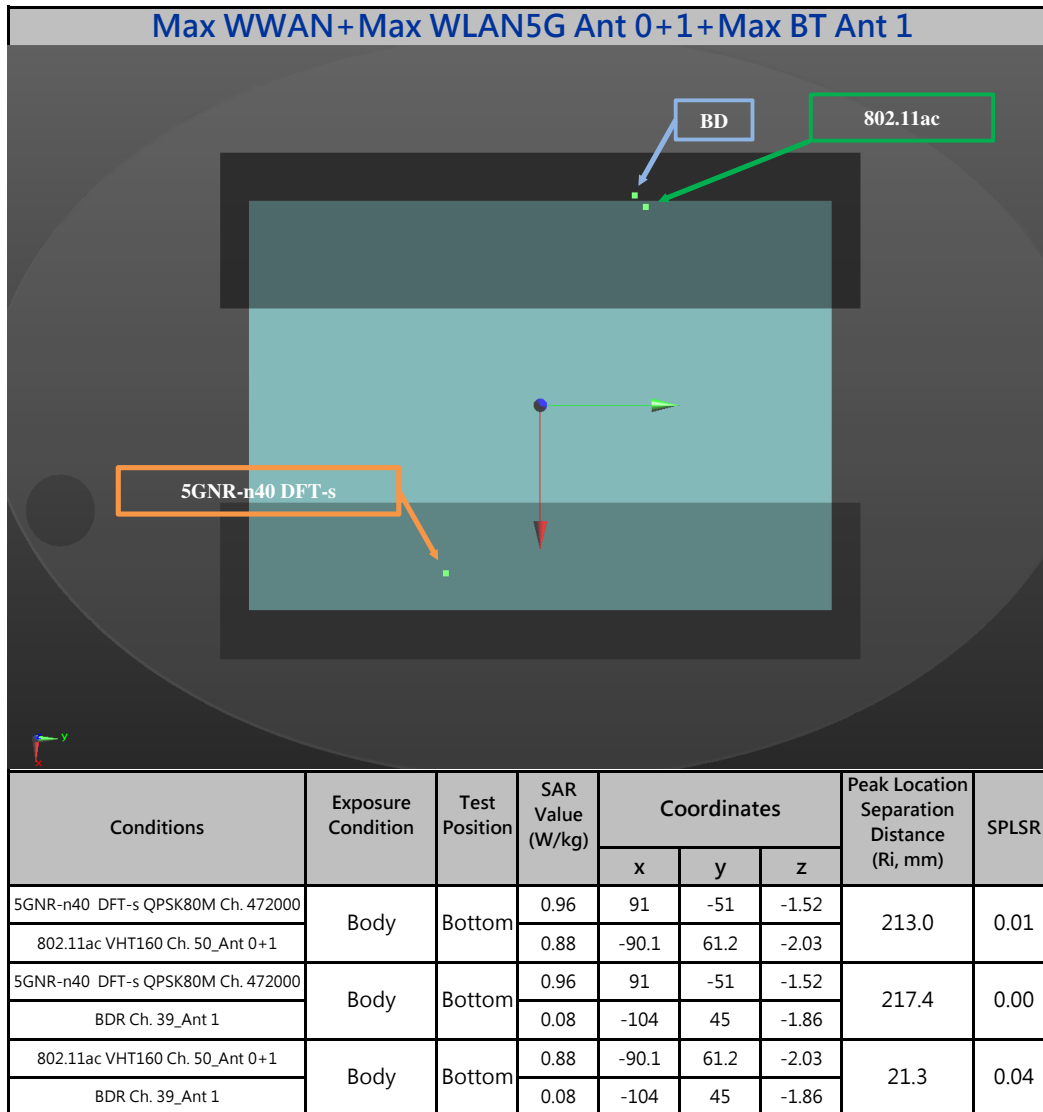


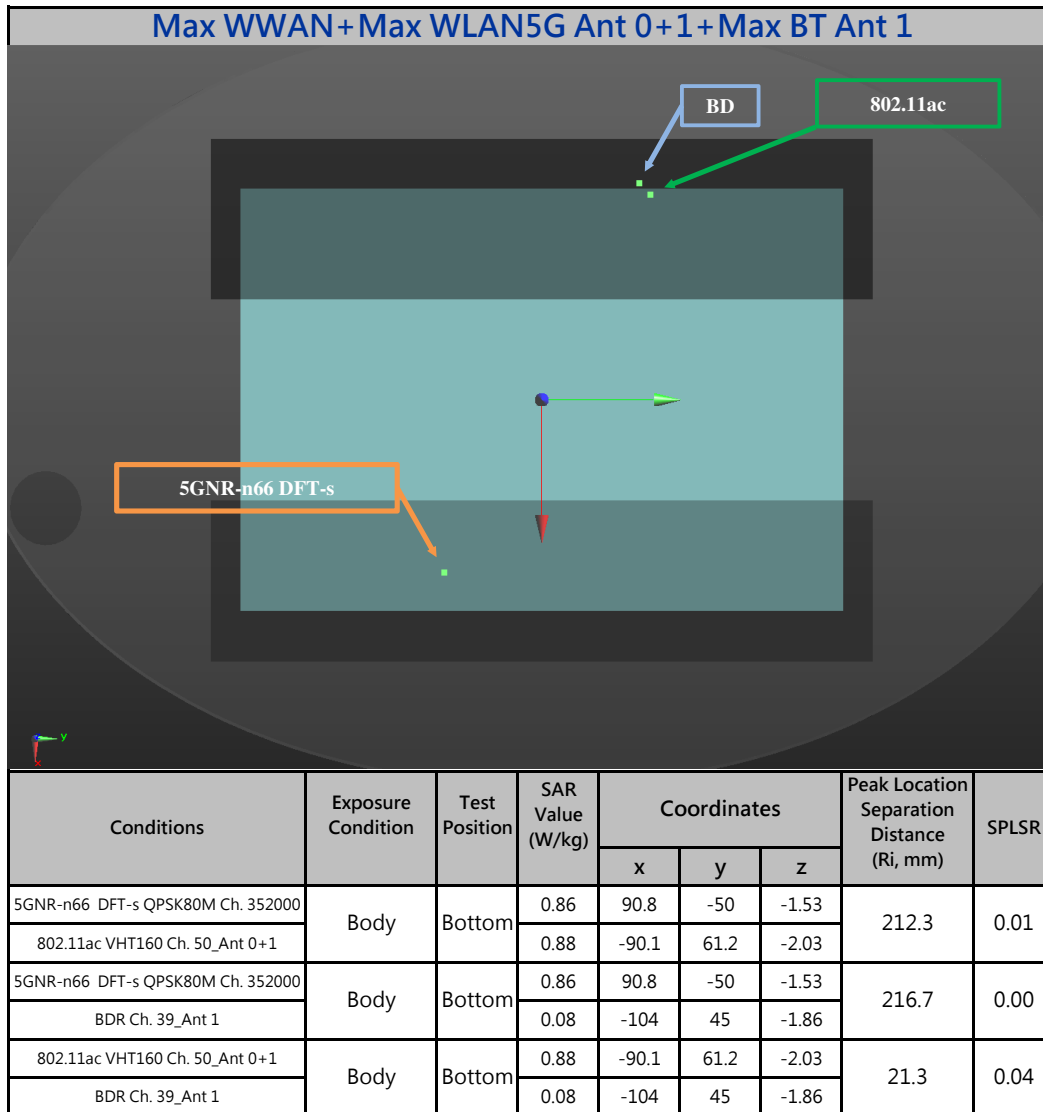


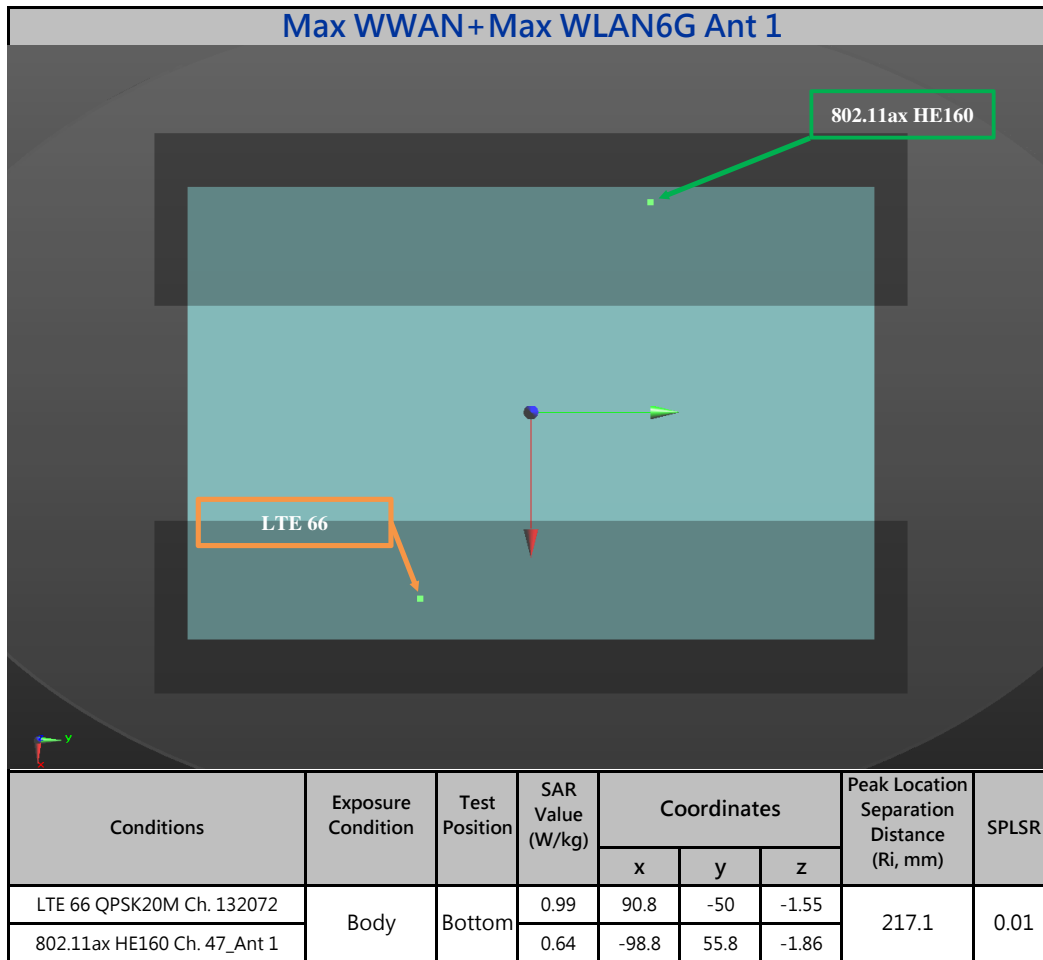


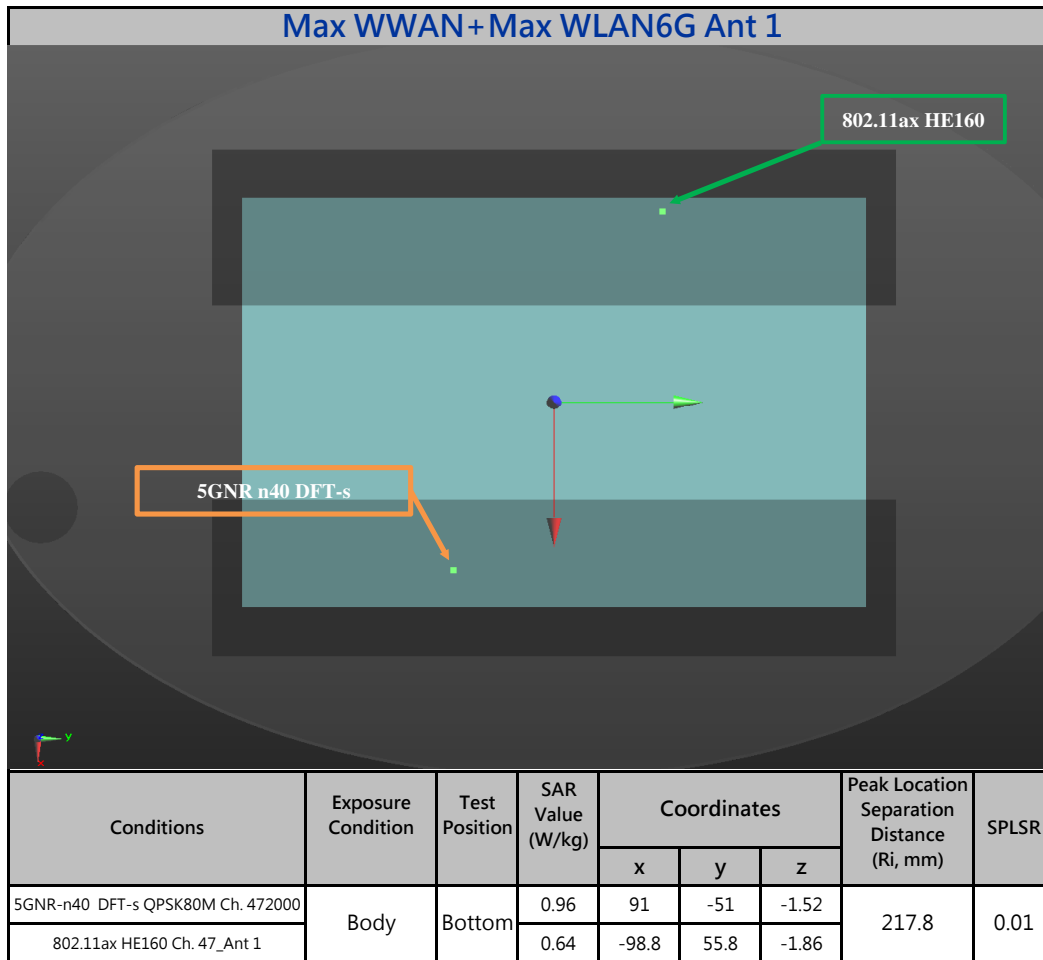


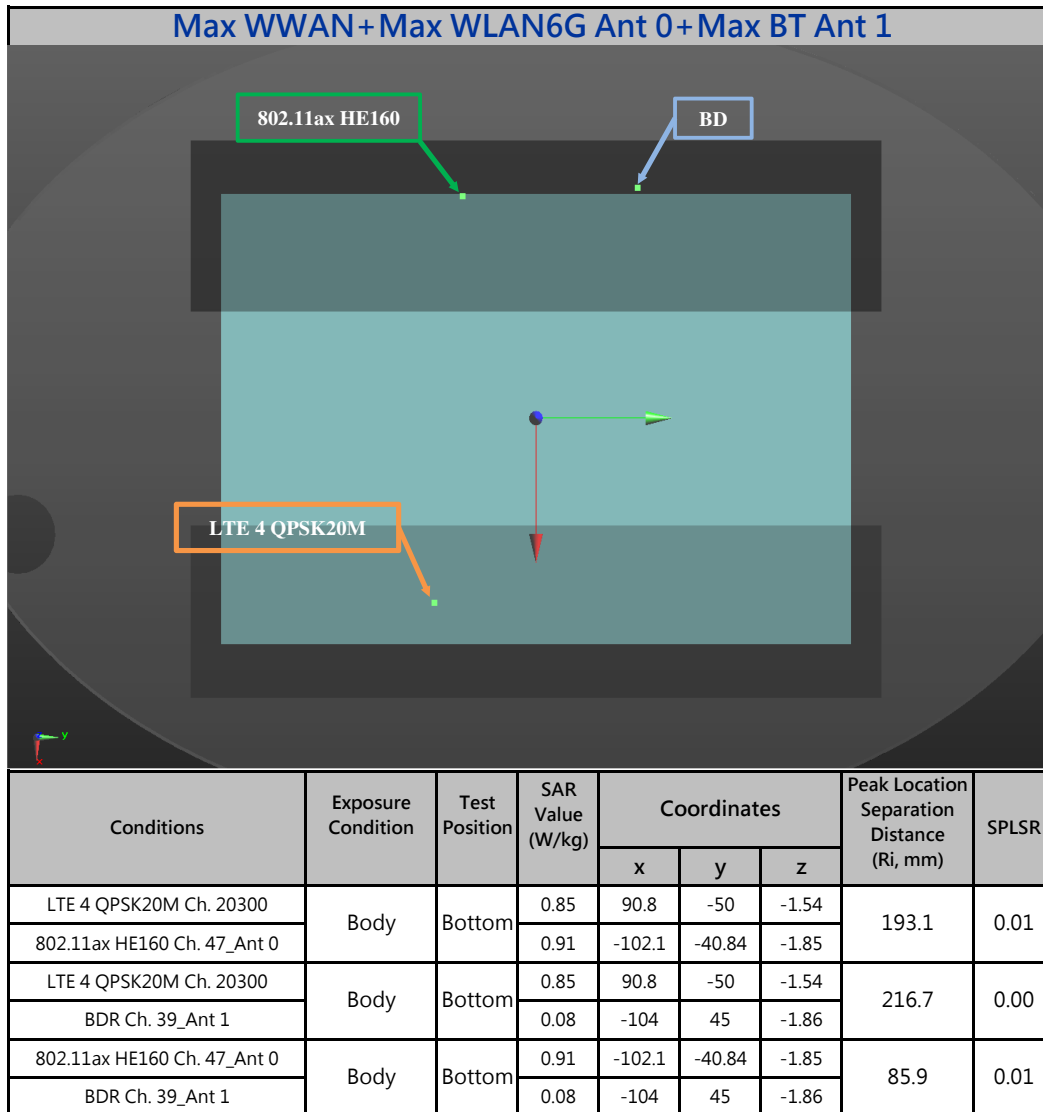


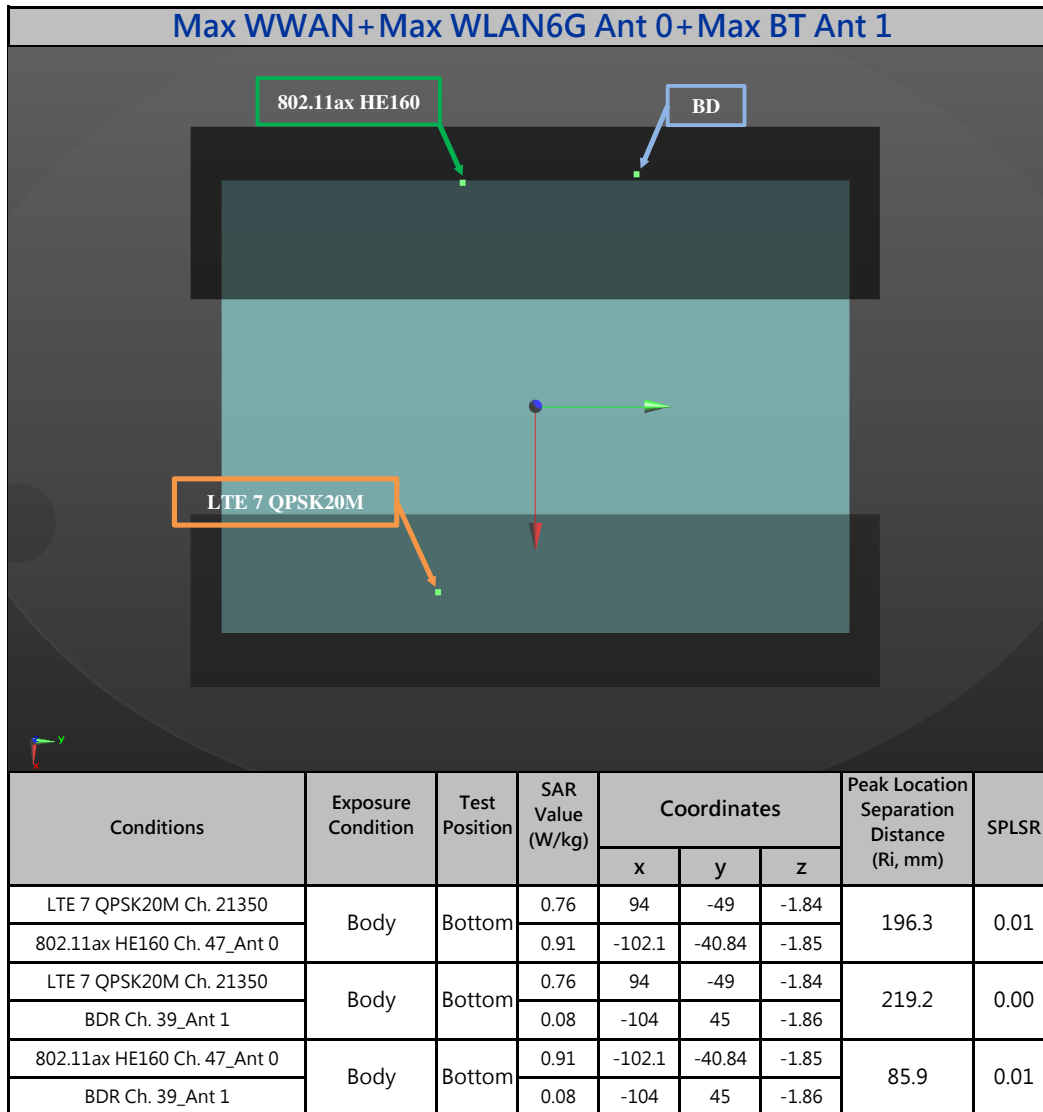


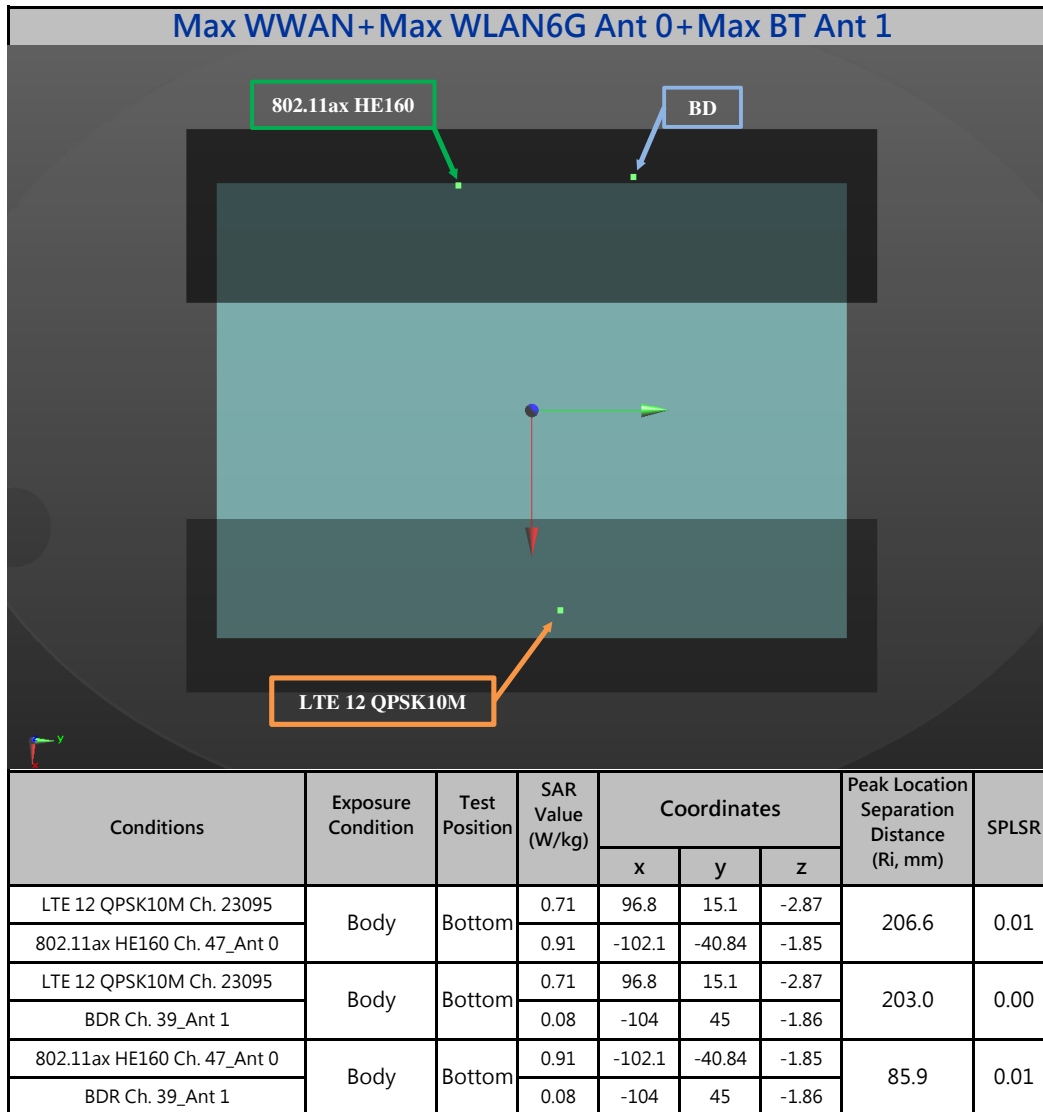


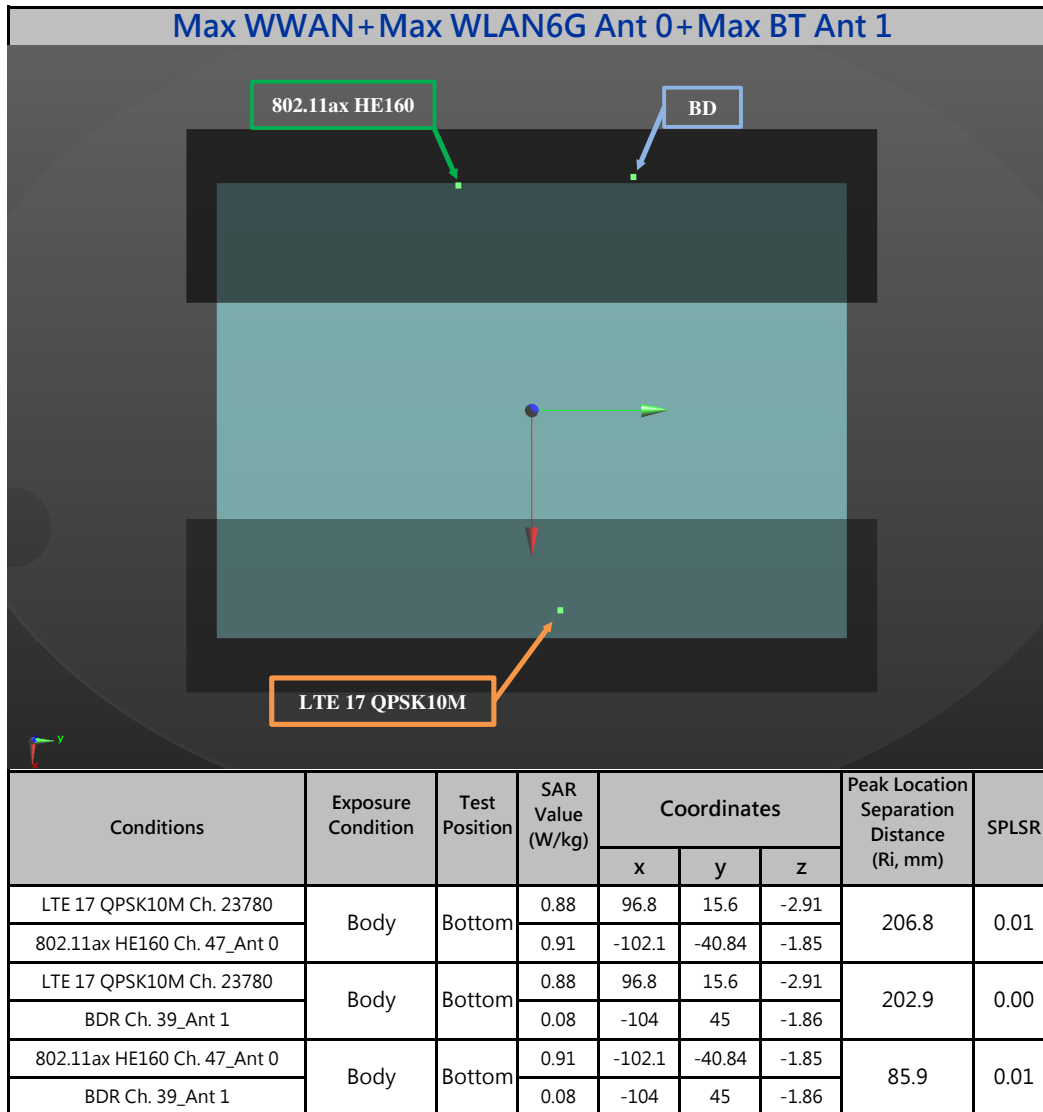


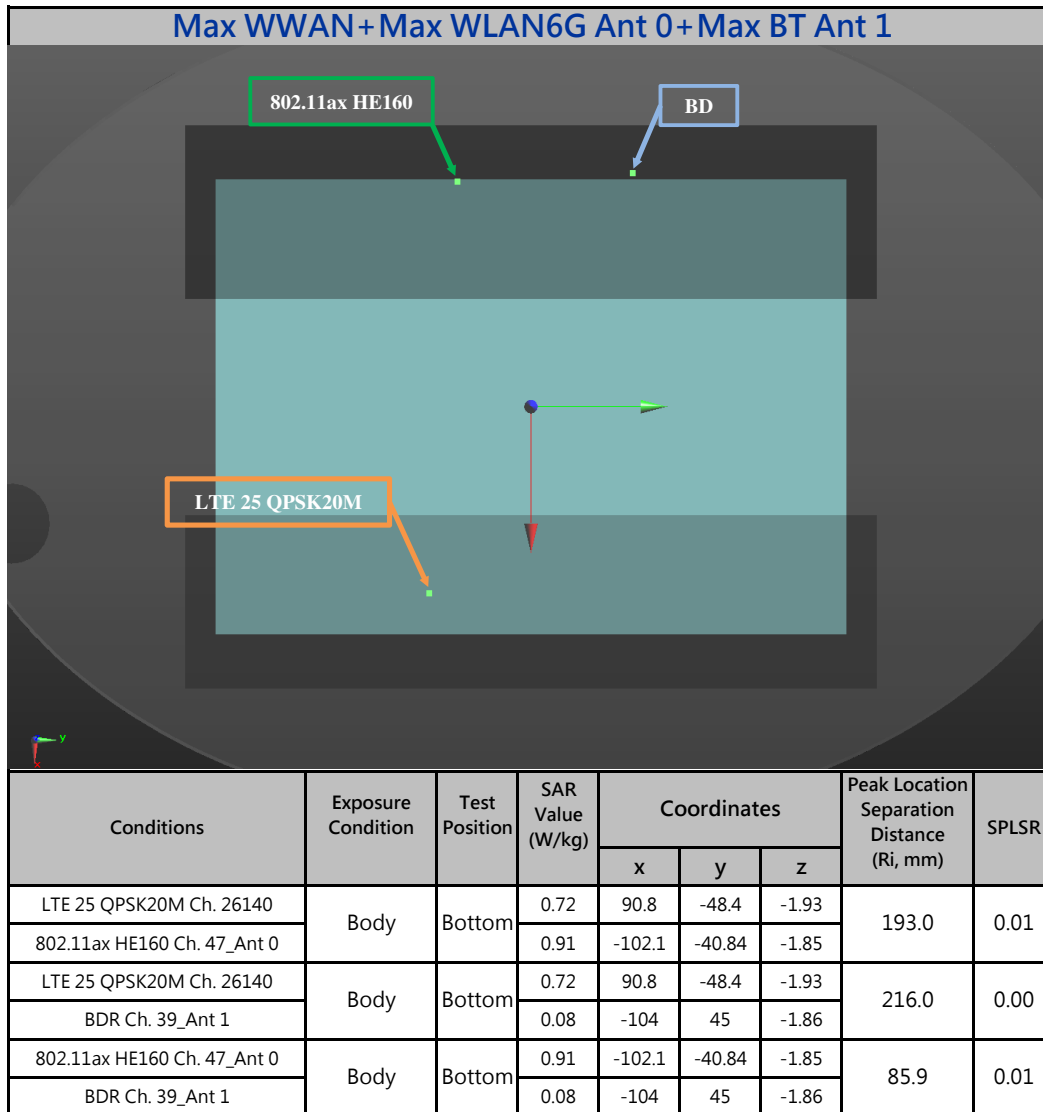


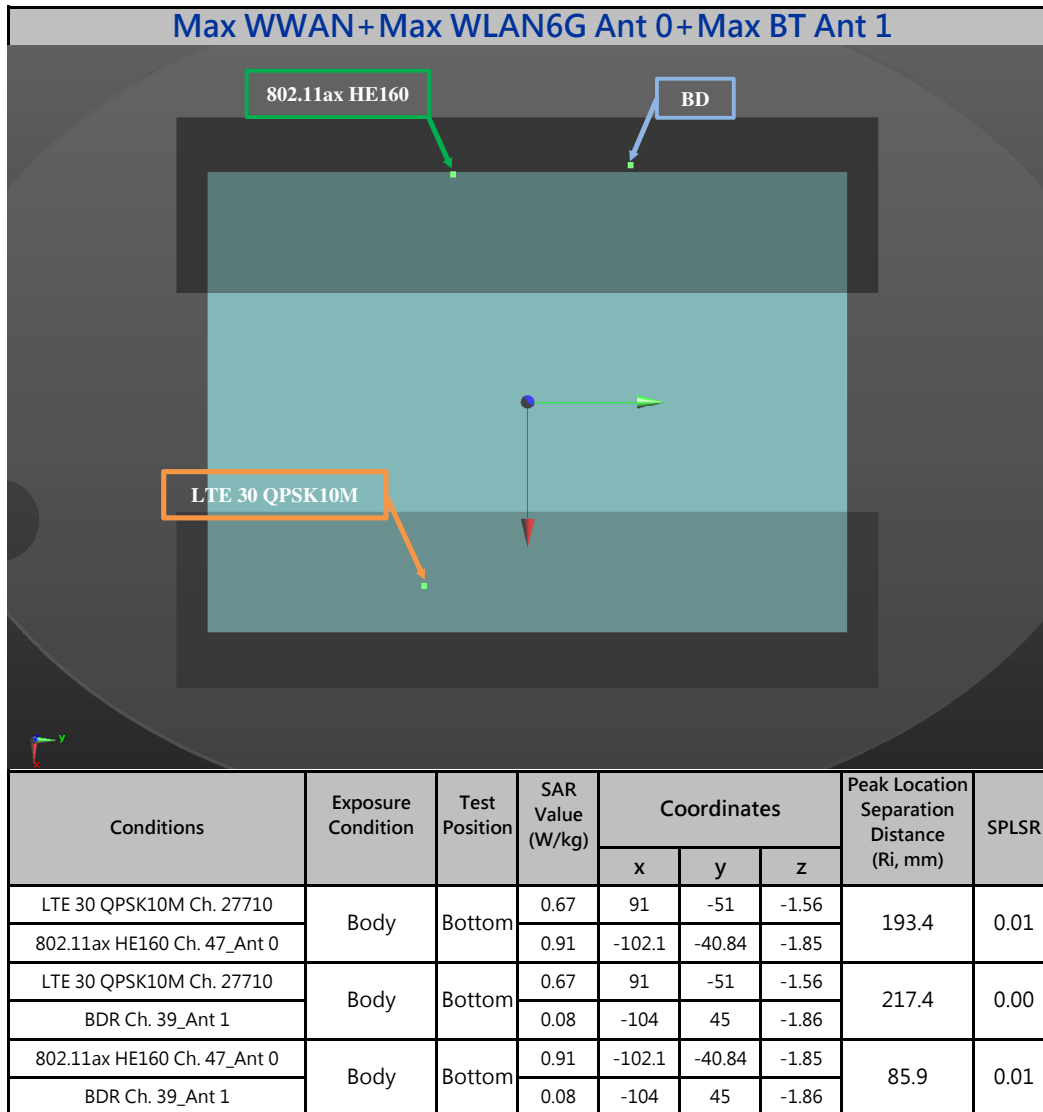


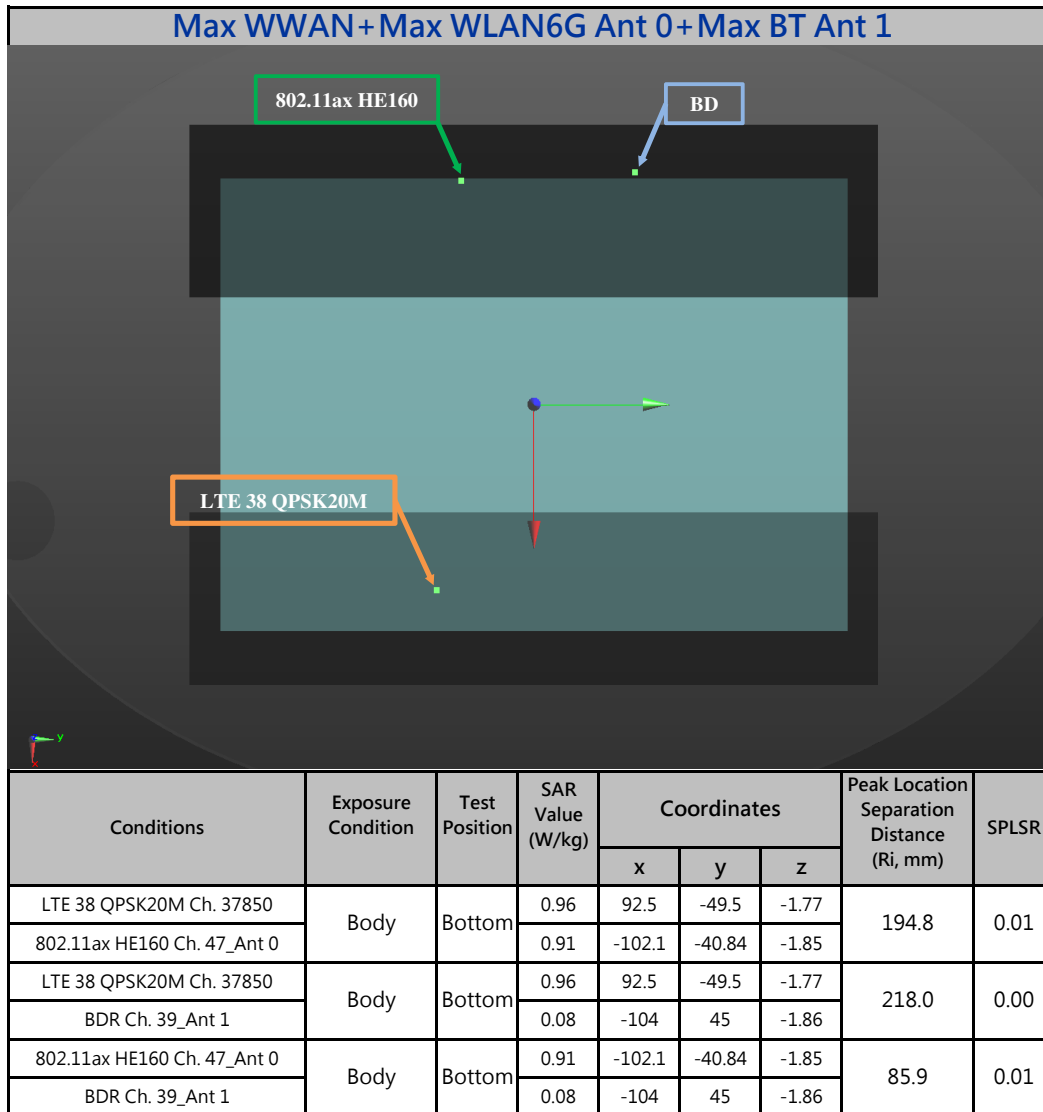


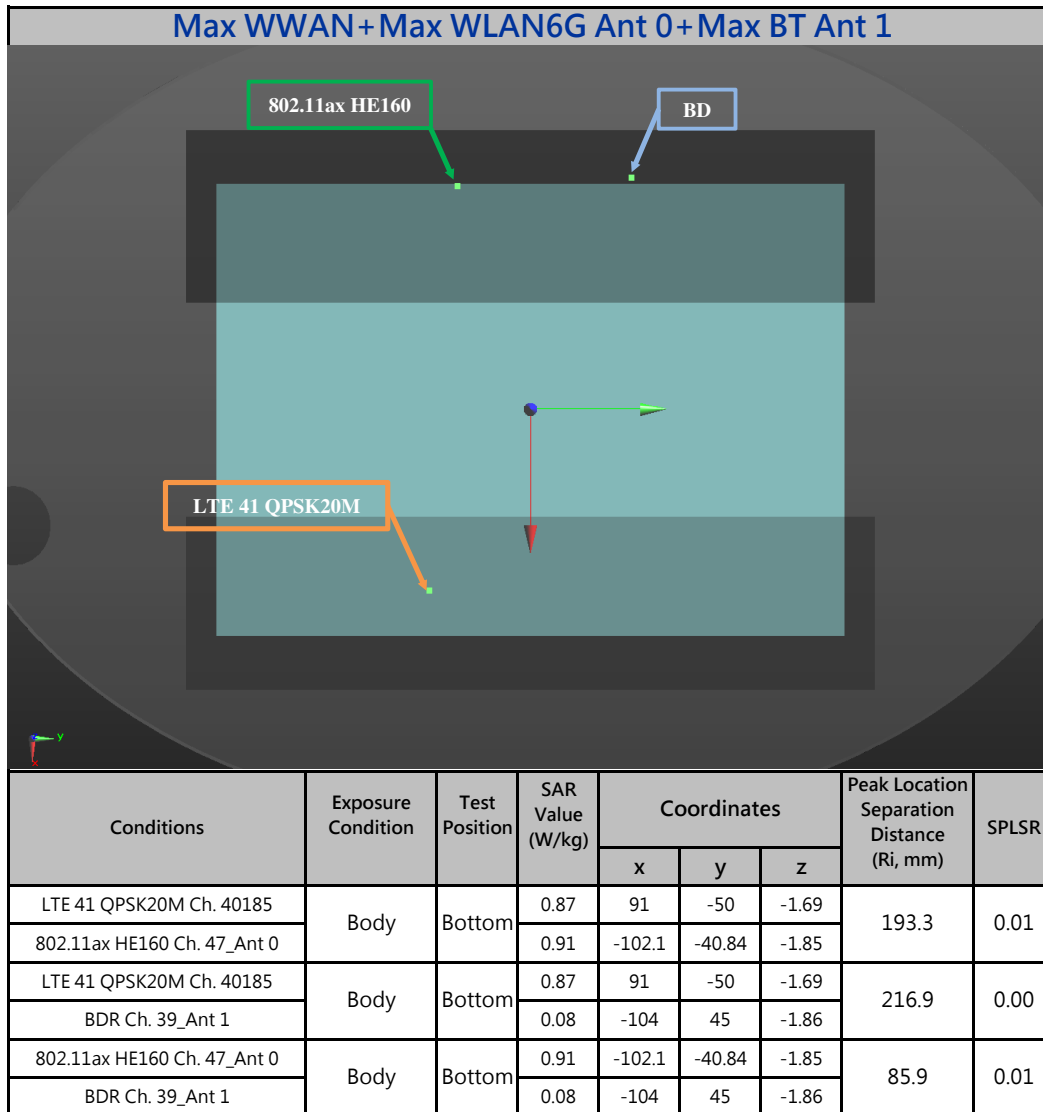


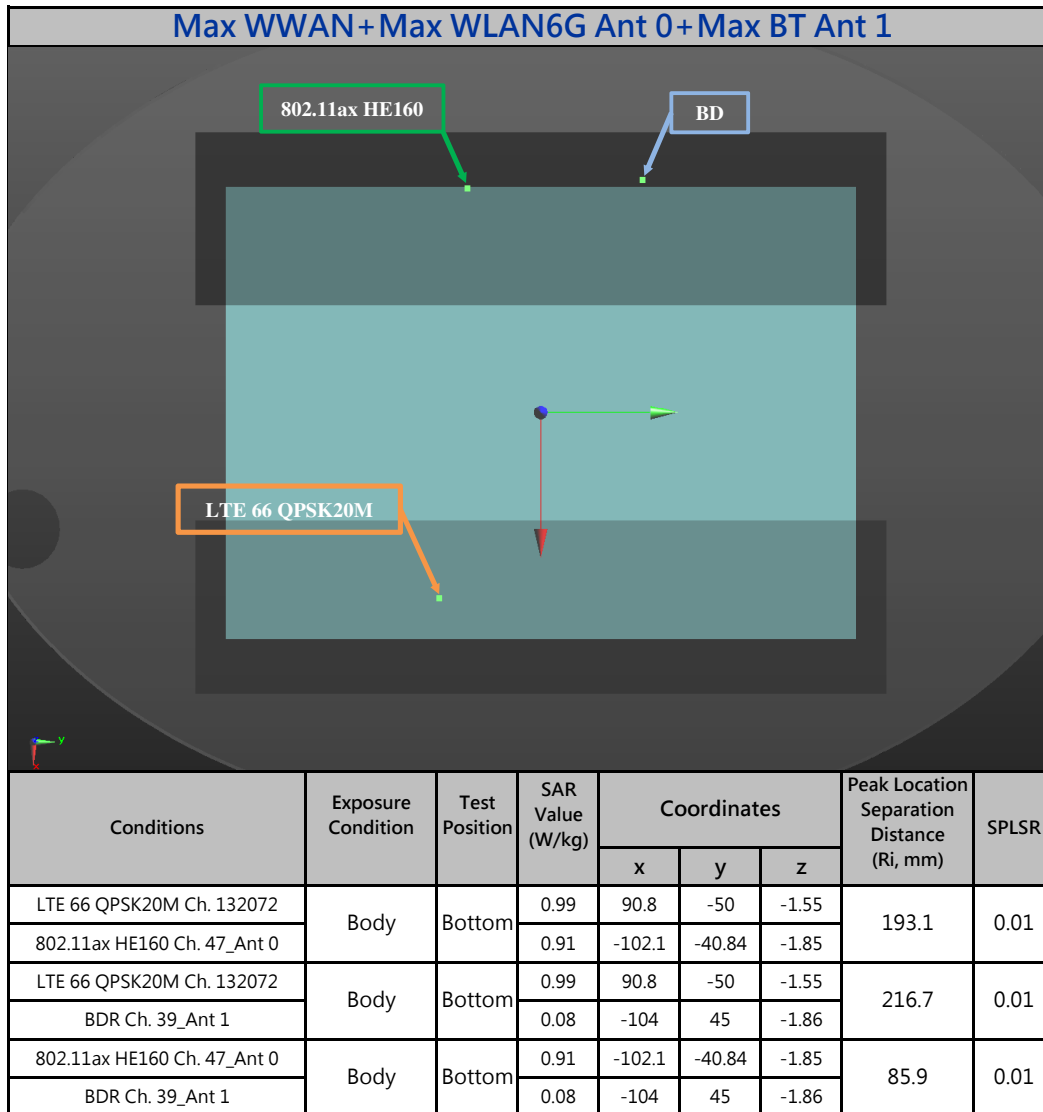


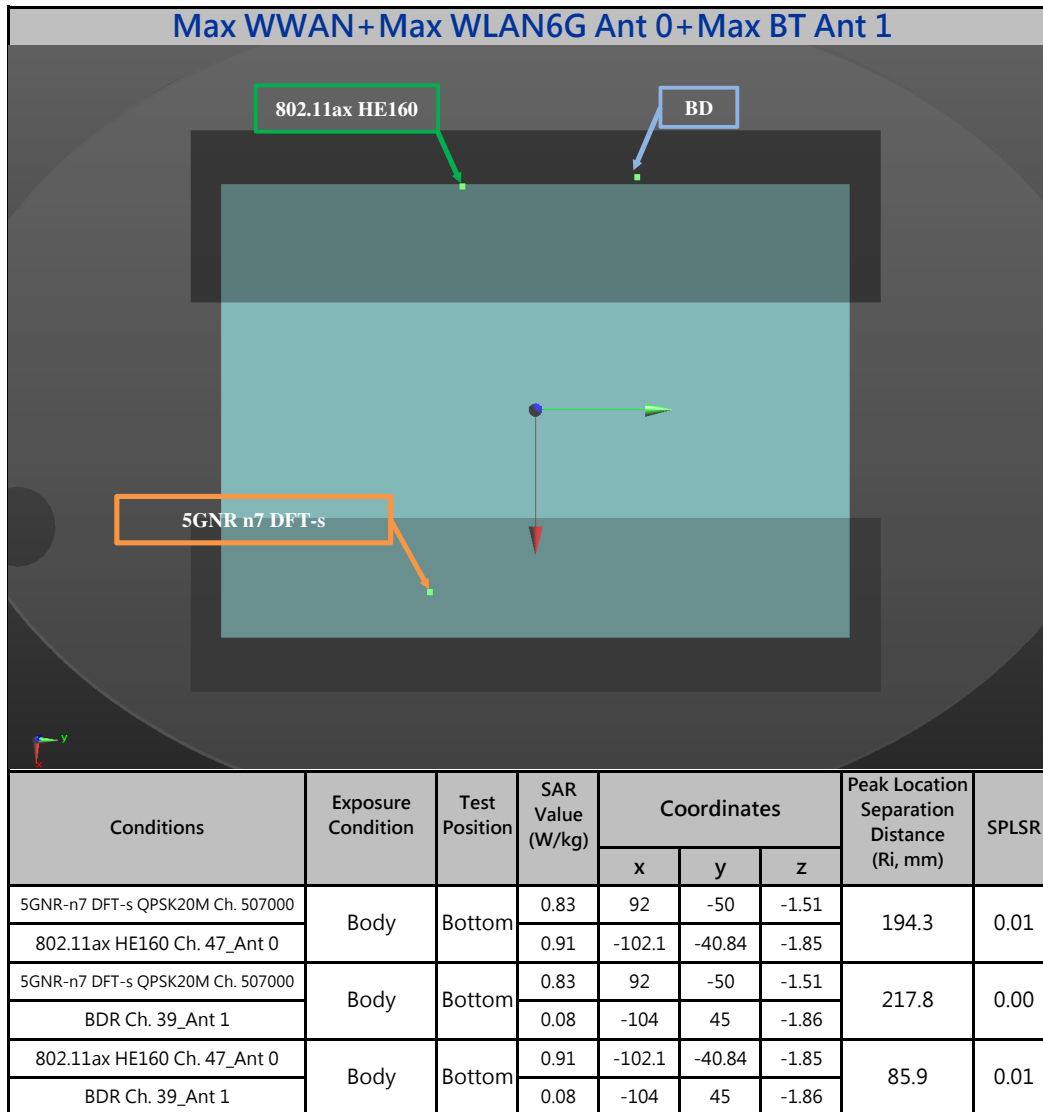

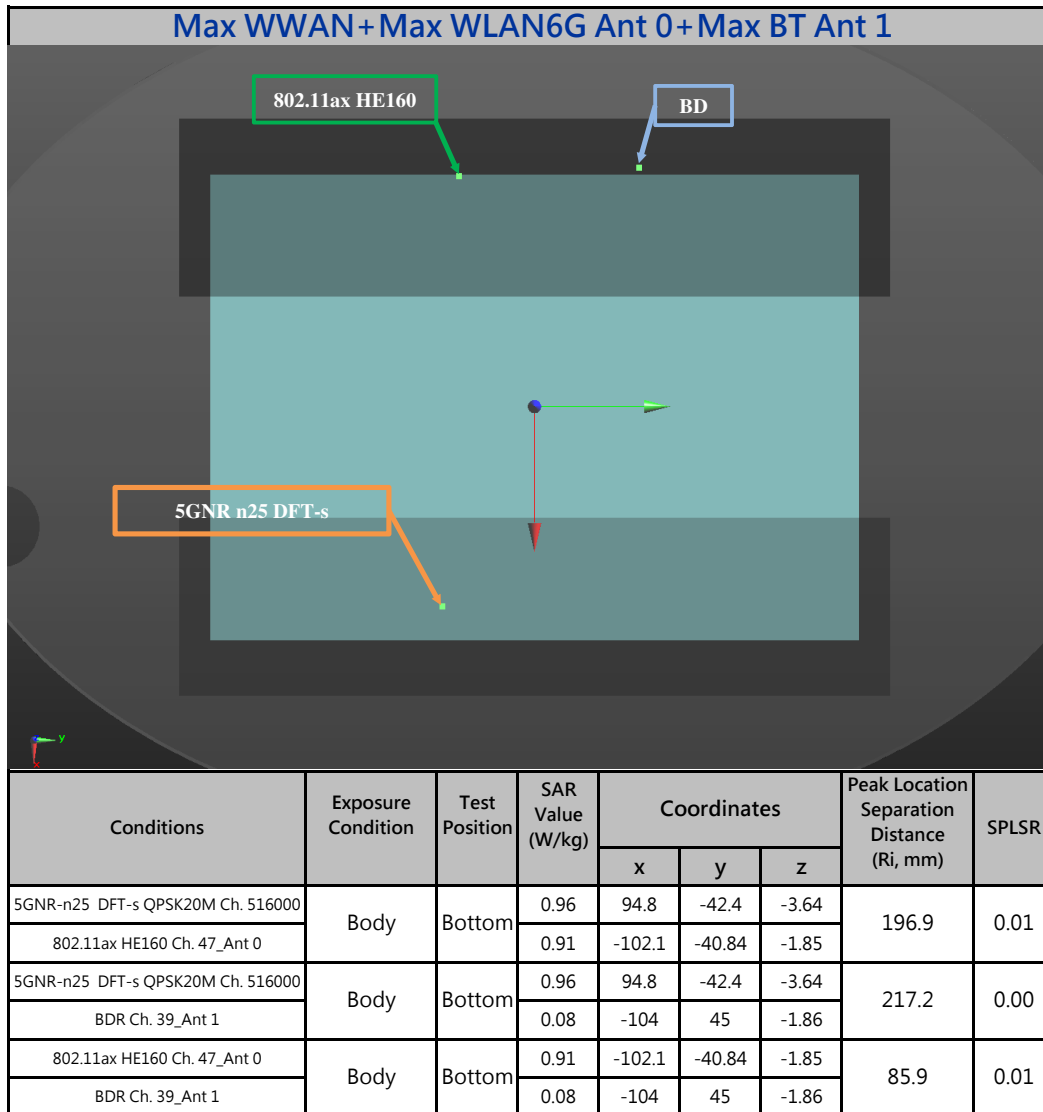

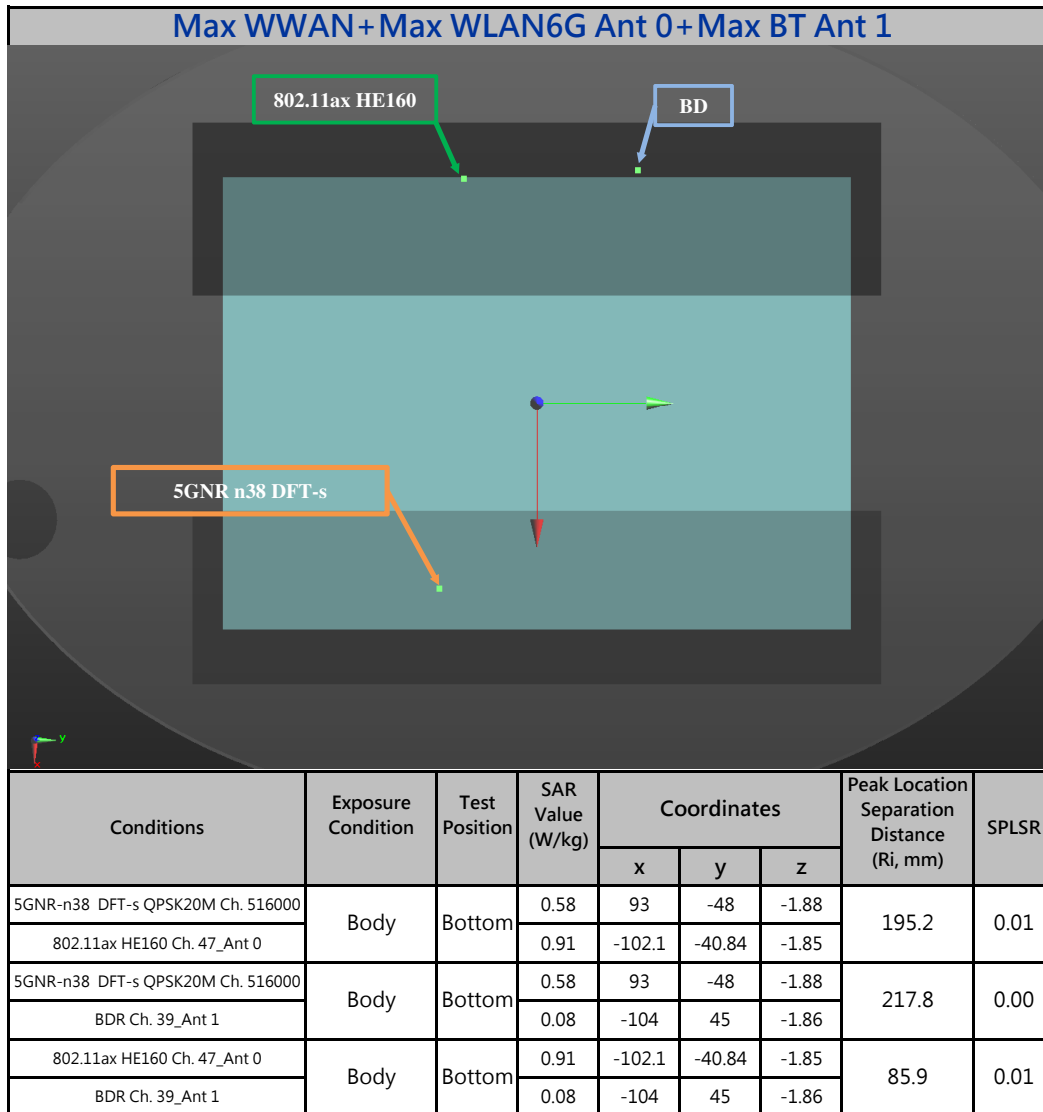

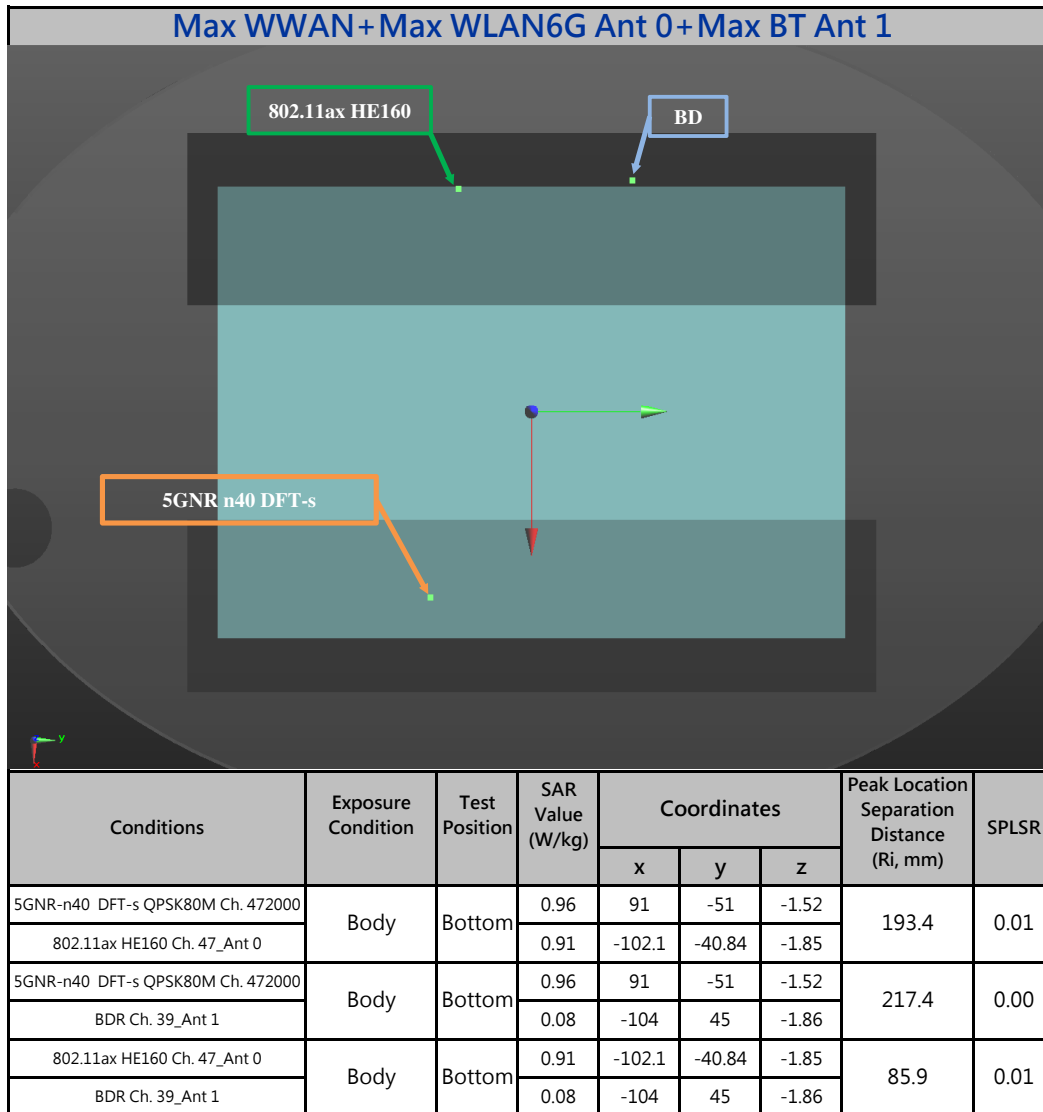

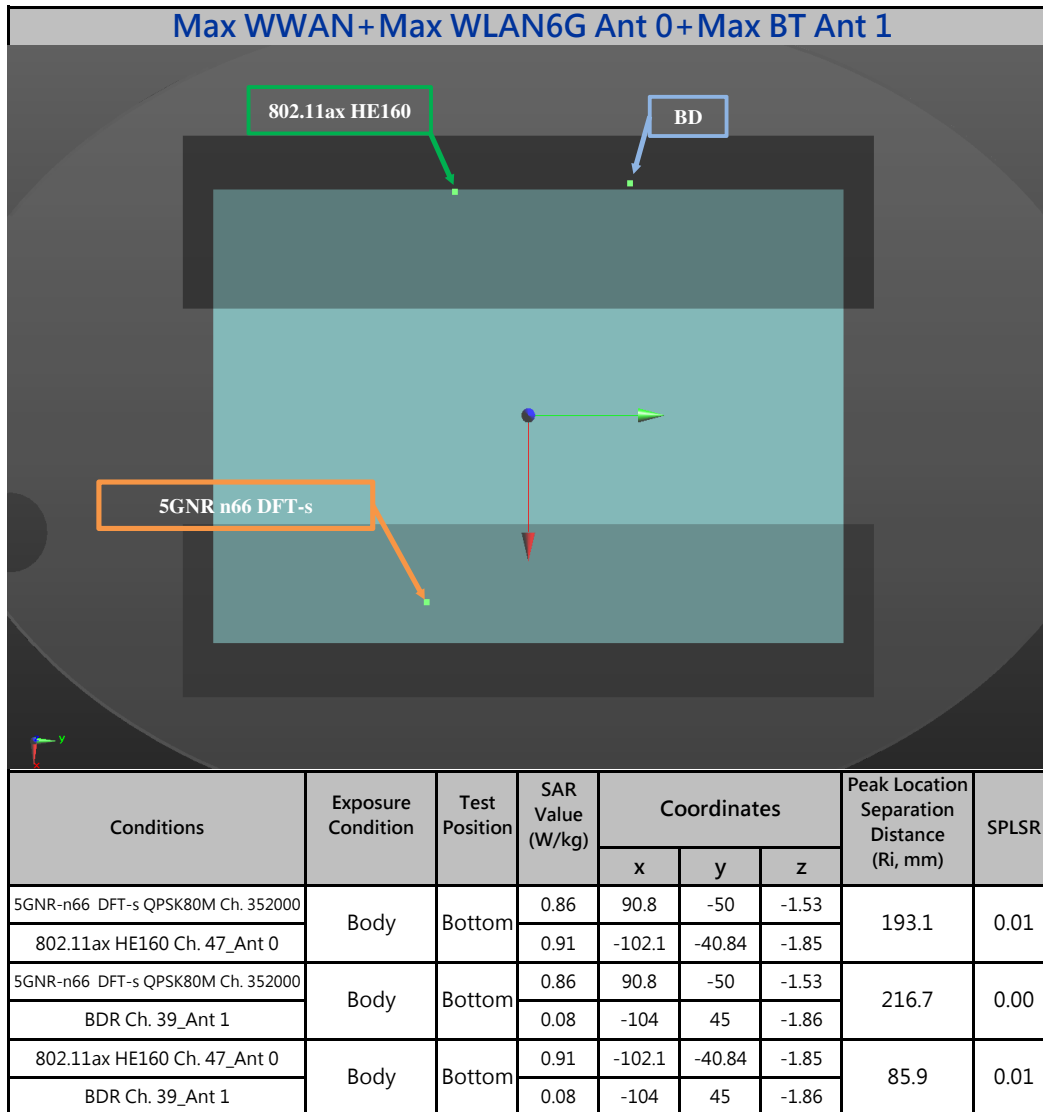

Appendix L. Verifying the Mechanism Operation of Gravity-sensor

The power verified by LCD angle changed are shown as below.

1.Hall Effect and Gravity-Sensor (WLAN 2.4G_802.11b_Ant 0_Ch6)

Orientation 1	<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																																					
Laptop mode	Degree	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360
	Power	17.6	16	16	16	16	16	16	16	16	16	16	16.1	16.1	16.1	16.1	16.1	16.1	16.1	16.1	16.1	16.1	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6
Range of trigger angle	 Move back by 5 degree, until close mode is reobtained.																																					
0~190	Degree	0	5	10	15	20	25	30		195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295		330	335	340	345	350	355	360
	Power										16.1	17.6																										
	<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps																																					
	Degree	0	1	2	3	4	5	6		195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215		354	355	356	357	358	359	360
	Power										16.1	16.1	16.1	16.1	16.1	16.1	16.1	16.1	17.6	17.6	17.6	17.6	17.5	17.5	17.5	17.5	17.5											
	<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																																					
	Degree	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360
	Power																						17.5	17.6	17.6	17.6	17.5	17.5	17.5	17.5	17.5	17.6	17.6	17.6	17.6	17.6	17.6	17.6
Orientation 2	<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																																					
Tablet mode	Degree	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200	190	180	170	160	150	140	130	120	110	100	90	80	70	60	50	40	30	20	10	0
	Power	17.5	17.5	17.5	17.5	17.5	17.5	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	17.6	16	16	16	16	16	16	16	16	16	16	16.1	16.1	16.1	16.1	16.1	16.1	16.1	16.1	16.1	16.1	17.6
Range of trigger angle	 Move back by 5 degree, until close mode is reobtained.																																					
190~360	Degree	360	355	350	345	340	335	330		295	290	285	280	275	270	265	260	255	250	245	240	235	230	225	220	215	210	205	200	195		30	25	20	15	10	5	0
	Power																												17.6	16								
	<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps																																					
	Degree	360	359	358	357	356	355	354		210	209	208	207	206	205	204	203	202	201	200	199	198	197	196	195	194	193	192	191	190		6	5	4	3	2	1	0
	Power																	17.6	17.6	17.6	17.6	15.9	15.9	15.9	15.9													
	<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																																					
	Degree	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200	190	180	170	160	150	140	130	120	110	100	90	80	70	60	50	40	30	20	10	0
	Power																		15.8	15.9	15.9	15.9	16.1	16.1	16.1	16.1	16.1	16.1	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	17.6

1.Hall Effect and Gravity-Sensor (WLAN 2.4G 802.11b Ant 1 Ch6)

Orientation 1	<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																																						
Laptop mode	Degree	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	
Range of trigger angle	Power	17.3	15.9	15.9	15.9	15.9	15.9	15.9	15.7	15.8	15.8	15.8	15.8	15.8	15.9	15.9	15.9	15.9	15.9	15.9	17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.5	17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.4
0~180	 Move back by 5 degree, until close mode is reobtained.																																						
	Degree	0	5	10	15	20	25	30		180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280		330	335	340	345	350	355	360	
	Power									15.8	17.4																												
	<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps																																						
	Degree	0	1	2	3	4	5	6		180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200		354	355	356	357	358	359	360	
	Power												15.9	15.9	15.9	15.9	15.9	15.9	15.9	17.4	17.4	17.4	17.4																
	<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																																						
	Degree	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	
	Power																				17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.5	17.4	17.4	17.4	17.4	17.4	17.4	17.4	14.4	17.4	
	Orientation 2	<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																																					
Tablet mode	Degree	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200	190	180	170	160	150	140	130	120	110	100	90	80	70	60	50	40	30	20	10	0	
Range of trigger angle	Power	17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.4	17.5	17.4	17.4	17.4	17.4	17.4	17.4	17.4	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.7	15.8	15.8	15.8	15.8	15.8	15.9	15.9	15.9	15.9	15.9	15.9	17.3	
	 Move back by 5 degree, until close mode is reobtained.																																						
	Degree	360	355	350	345	340	335	330		260	255	250	245	240	235	230	225	220	215	210	205	200	195	190	185	180	175	170	165	160		30	25	20	15	10	5	0	
	Power																								17.4	16													
	<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps																																						
	Degree	360	359	358	357	356	355	354		200	199	198	197	196	195	194	193	192	191	190	189	188	187	186	185	184	183	182	181	180		6	5	4	3	2	1	0	
	Power														17.4	17.4	17.4	17.4	17.4	17.4	17.5	15.9	15.8	15.9	15.8	15.9	15.9	15.9	15.9										
	<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																																						
	Degree	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200	190	180	170	160	150	140	130	120	110	100	90	80	70	60	50	40	30	20	10	0	
	Power																						15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	17.3	

1.Hall Effect and Gravity-Sensor (WLAN 5.3G_802.11a_Ant 0_Ch52)

Orientation 1	<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																																						
Laptop mode	Degree	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	
	Power	16.7	11.5	11.5	11.5	11.5	11.6	11.6	11.6	11.6	11.6	11.6	11.5	11.5	11.5	11.5	11.5	11.5	11.6	11.6	9.63	9.63	9.63	9.63	9.67	9.67	9.61	9.61	9.61	9.61	9.62	9.62	9.62	9.63	9.75	9.65	9.65	9.65	
Range of trigger angle	 Move back by 5 degree, until close mode is reobtained.																																						
0~180	Degree	0	5	10	15	20	25	30		195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295		330	335	340	345	350	355	360	
	Power									11.7	9.53																												
	<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps																																						
	Degree	0	1	2	3	4	5	6		195	196	197	198	199	200	201	202	234	235	236	237	238	239	240	241	242	243	244	245	246		354	355	356	357	358	359	360	
	Power									11.7	11.7	11.7	11.6	11.7	9.63	9.57	9.57	9.57	9.64																				
	<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																																						
	Degree	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	
	Power																					9.63	9.57	9.57	9.57	9.64	9.61	9.61	9.61	9.61	9.62	9.62	9.57	9.57	9.64	9.61	9.61	9.68	
Orientation 2	<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																																						
Tablet mode	Degree	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200	190	180	170	160	150	140	130	120	110	100	90	80	70	60	50	40	30	20	10	0	
	Power	9.57	9.57	9.57	9.64	9.61	9.61	9.61	9.61	9.62	9.62	9.57	9.57	9.64	9.61	9.61	9.71	9.68	11.5	11.5	11.5	11.5	11.6	11.6	11.6	11.6	11.6	11.5	11.5	11.5	11.5	11.6	11.6	11.5	11.7	11.5	16.7		
Range of trigger angle	 Move back by 5 degree, until close mode is reobtained.																																						
	Degree	360	355	350	345	340	335	330		295	290	285	280	275	270	265	260	255	250	245	240	235	230	225	220	215	210	205	200	195		30	25	20	15	10	5	0	
	Power																												9.58	11.7									
	<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps																																						
	Degree	360	359	358	357	356	355	354		210	209	208	207	206	205	204	203	202	201	200	199	198	197	196	195	194	193	192	191	190		6	5	4	3	2	1	0	
	Power																		9.63	9.63	9.61	11.6	11.6	11.6	11.6														
	<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																																						
	Degree	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200	190	180	170	160	150	140	130	120	110	100	90	80	70	60	50	40	30	20	10	0	
	Power																		11.6	11.5	11.5	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.5	11.5	11.5	11.5	11.6	11.6	11.6	11.6	16.6		

1.Hall Effect and Gravity-Sensor (WLAN 5.3G_802.11a_Ant 1_Ch52)

Orientation 1	<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																																						
Laptop mode	Degree	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	
	Power	16.7	11.6	11.6	11.6	11.6	11.6	11.7	11.7	11.6	11.6	11.6	11.6	11.6	11.6	11.5	11.5	11.5	11.5	11.6	11.7	9.67	9.67	9.67	9.67	9.71	9.71	9.65	9.65	9.65	9.65	9.66	9.66	9.67	9.79	9.69	9.69	9.69	
Range of trigger angle	 Move back by 5 degree, until close mode is reobtained.																																						
0~180	Degree	0	5	10	15	20	25	30		195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295		330	335	340	345	350	355	360	
	Power									11.7	9.57																												
	<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps																																						
	Degree	0	1	2	3	4	5	6		195	196	197	198	199	200	201	202	234	235	236	237	238	239	240	241	242	243	244	245	246		354	355	356	357	358	359	360	
	Power									11.7	11.7	11.7	11.6	11.7	9.63	9.57	9.57	9.57	9.64																				
	<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																																						
	Degree	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	
	Power																					9.67	9.61	9.61	9.61	9.68	9.65	9.64	9.64	9.64	9.65	9.65	9.6	9.6	9.68	9.65	9.65	9.72	
Orientation 2	<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																																						
Tablet mode	Degree	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200	190	180	170	160	150	140	130	120	110	100	90	80	70	60	50	40	30	20	10	0	
	Power	9.54	9.54	9.54	9.61	9.58	9.58	9.58	9.58	9.59	9.59	9.54	9.54	9.61	9.58	9.58	9.68	9.65	11.5	11.5	11.5	11.5	11.6	11.6	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.6	11.6	11.5	11.7	11.5	16.7	
Range of trigger angle	 Move back by 5 degree, until close mode is reobtained.																																						
	Degree	360	355	350	345	340	335	330		295	290	285	280	275	270	265	260	255	250	245	240	235	230	225	220	215	210	205	200	195		30	25	20	15	10	5	0	
	Power																												9.55	11.6									
	<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps																																						
	Degree	360	359	358	357	356	355	354		210	209	208	207	206	205	204	203	202	201	200	199	198	197	196	195	194	193	192	191	190		6	5	4	3	2	1	0	
	Power																		9.6	9.6	9.58	11.6	11.6	11.6	11.5														
	<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																																						
	Degree	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200	190	180	170	160	150	140	130	120	110	100	90	80	70	60	50	40	30	20	10	0	
	Power																		11.6	11.5	11.5	11.6	11.6	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	16.6	