



# FCC SAR TEST REPORT

**FCC ID** : E2KFM350GL  
**Equipment** : 5G Module  
**Brand Name** : Fibocom Wireless Inc.  
**Model Name** : FM350-GL  
**Applicant** : Dell Inc.  
One Dell Way Round Rock, TX 78682, USA  
**Manufacturer** : Dell Inc.  
One Dell Way Round Rock, TX 78682, USA  
**Standard** : FCC 47 CFR Part 2 (2.1093)

The product was received on Nov. 11, 2022 and testing was started from Apr. 07, 2023 and completed on Apr. 07, 2023. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.

Cona Huang

Approved by: Cona Huang / Deputy Manager



**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



## Table of Contents

1. Statement of Compliance .....	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information .....	5
3.2 General LTE SAR Test and Reporting Considerations .....	7
3.3 General 5G NR SAR Test and Reporting Considerations.....	10
4. Proximity Sensor Triggering Test.....	12
5. RF Exposure Limits.....	17
5.1 Uncontrolled Environment.....	17
5.2 Controlled Environment.....	17
6. Specific Absorption Rate (SAR).....	18
6.1 Introduction .....	18
6.2 SAR Definition.....	18
7. System Description and Setup .....	19
7.1 Test Site Location .....	19
7.2 E-Field Probe .....	20
7.3 Data Acquisition Electronics (DAE) .....	20
7.4 Phantom.....	21
7.5 Device Holder.....	22
8. Measurement Procedures .....	23
8.1 Spatial Peak SAR Evaluation.....	23
8.2 Power Reference Measurement.....	24
8.3 Area Scan .....	24
8.4 Zoom Scan.....	25
8.5 Volume Scan Procedures .....	25
8.6 Power Drift Monitoring.....	25
9. Test Equipment List .....	26
10. System Verification .....	27
10.1 Tissue Verification.....	27
10.2 System Performance Check Results.....	27
11. RF Exposure Positions .....	27
11.1 SAR Testing for Tablet.....	27
12. 5G NR Output Power (Unit: dBm) .....	28
13. Antenna Location.....	32
14. SAR Test Results .....	35
14.1 Body SAR .....	36
14.2 Repeated SAR Measurement .....	36
15. Simultaneous Transmission Analysis.....	37
15.1 Body Exposure Conditions .....	38
15.2 SPLSR Evaluation and Analysis .....	40
16. Uncertainty Assessment .....	47
17. References.....	47
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



## History of this test report



## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Dell Inc., 5G Module, FM350-GL, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)
		Body	1g SAR (W/kg)	
		1g SAR (W/kg)	1g SAR (W/kg)	
Licensed	WCDMA	WCDMA II	1.15	1.56
		WCDMA IV	1.00	
		WCDMA V	0.98	
		LTE Band 7	1.20	
	LTE	LTE Band 12 / 17	1.12	
		LTE Band 13	1.21	
		LTE Band 14	1.20	
		LTE Band 2 / 25	1.32	
		LTE Band 5 / 26	1.02	
		LTE Band 30	1.04	
		LTE Band 38 / 41	1.24	
		LTE Band 48	1.28	
		LTE Band 4 / 66	1.20	
		LTE Band 71	1.28	
		FR1 n2	1.05	
		FR1 n5	1.07	
		FR1 n7	0.92	
	FR1	FR1 n25	1.09	
		FR1 n30	0.79	
		FR1 n38 / n41	1.27	
		FR1 n48	1.15	
		FR1 n66	1.11	
		FR1 n71	1.13	
		FR1 n77 / n78	1.39	
Date of Testing:		2023/4/7		

Sportun Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang

Report Producer: Paula Chen

## 2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02



### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Product Feature & Specification	
Equipment Name	5G Module
Brand Name	Fibocom Wireless Inc.
Model Name	FM350-GL
FCC ID	E2KFM350GL
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz, 3450MHz ~ 3550MHz 5G NR n78: 3700 MHz ~ 3800 MHz, 3450MHz ~ 3550MHz
Mode	RMC 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM
Remark:	1. Based on the original filing Sporton SAR report No.: FA2N0217 to enable 5G NR n48 operation in this report. 2. This device has two antenna vendors; RF exposure evaluation selects Auden as the main test, Speed will spot check worst case found in Auden. 3. This device is convertible type notebook PC, and there have Laptop and Tablet two usage way, when end user is used different mode which the device will according current mode to limit different maximum power. 4. When the EN-DC is active only operating at WWAN Main and MIMO2 antenna combination and the Sim-Tx analysis include in section15.

WWAN Antenna Information (Laptop)				
Main Antenna	Manufacturer	Wistron Corporation	Peak gain(dBi)	3.22
	Part number	77H24	Type	Monopole coupling
MIMO 2 Antenna	Manufacturer	Wistron Corporation	Peak gain(dBi)	1.74
	Part number	77HC0	Type	Monopole coupling
WWAN Antenna Information (Tablet)				
Main Antenna	Manufacturer	Wistron Corporation	Peak gain(dBi)	1.4
	Part number	77H24	Type	Monopole coupling
MIMO 2 Antenna	Manufacturer	Wistron Corporation	Peak gain(dBi)	-0.27
	Part number	77HC0	Type	Monopole coupling



Host Information	
Equipment Name	Portable Computer
Brand Name	DELL
Model Name	P182G
Integrated WLAN Module 1	Brand Name: Intel® Wireless-6E AX211 Model Name: AX211NGW
Integrated WLAN Module 2	Brand Name: REALTEK Model Name: RTL8852BE
Integrated NFC Module	Brand Name: Dell Model Name: DWRFID2201
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC: ASK
EUT Stage	Identical Prototype
Remark:	<p>1. The Intel AX211NGW WLAN/BT module is integrated into this host. The WLAN 2.4GHz, 5GHz and Bluetooth SAR results are referenced from Intel SAR report, report number: 221026-01.TR02 (FCC ID: PD9AX211NG), WLAN 5.9GHz SAR referred to report No.: 221026-01.TR05 (FCC ID: PD9AX211NG), WLAN 6GHz SAR referred to new report No.: 221026-01.TR03 (FCC ID: PD9AX211NG) and these SAR results are also used to perform simultaneous transmission analysis.</p> <p>2. The REALTEK RTL8852BE WLAN/Bluetooth module is also integrated into this host, WLAN/Bluetooth SAR testing data, which can be referred to Sporton SAR Test Report, Report No.: FA2N0214 (FCC ID: E2K-RTL8852BE) and the result is used to do simultaneous transmission analysis.</p>

WLAN Antenna Information (Laptop)										
1	Ant. Type	PIFA			2	Ant. Type	PIFA			
	Model No.	Wistron P/N : 0772W9				Model No.	Wistron P/N : 08V97D			
	Peak Gain (dBi)					Peak Gain (dBi)				
	2400~2483.5MHz	2.93	5470~5725MHz	4.19		2400~2483.5MHz	2.04	5470~5725MHz	3	
	5150~5250MHz	2.92	5725~5850MHz	4.19		5150~5250MHz	2.47	5725~5850MHz	3	
	5250~5350MHz	2.92	5850~5895MHz	3.25		5250~5350MHz	2.47	5925~7125MHz	2.84	
WLAN Antenna Information (Tablet)										
1	Ant. Type	PIFA			2	Ant. Type	PIFA			
	Model No.	Wistron P/N : 0772W9				Model No.	Wistron P/N : 08V97D			
	Peak Gain (dBi)					Peak Gain (dBi)				
	2400~2483.5MHz	0.76	5470~5725MHz	1.74		2400~2483.5MHz	0.23	5470~5725MHz	4.16	
	5150~5250MHz	2.72	5725~5850MHz	1.04		5150~5250MHz	2.74	5725~5850MHz	4.19	
	5250~5350MHz	2.91	5925~7125MHz	1.17		5250~5350MHz	2.96	5925~7125MHz	3.8	

**3.2 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05											
FCC ID	E2KFM350GL										
Equipment Name	5G Module										
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz										
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz										
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM										
LTE Voice / Data requirements	Data only										
LTE MPR permanently built-in by design	<b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b>										
	Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )									
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz					
	QPSK	> 5	> 4	> 8	> 12	> 16					
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16					
	16 QAM	> 5	> 4	> 8	> 12	> 16					
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16					
LTE A-MPR	64 QAM	> 5	> 4	> 8	> 12	> 16					
	256 QAM	≥ 1									
In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)											
A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.											
Power reduction applied to satisfy SAR compliance	Yes, Proximity Sensor.										
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to the original report, report no.: FA2N0217.										
LTE Carrier Aggregation Additional Information	This device supports maximum of 5 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICL, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.										



Transmission (H, M, L) channel numbers and frequencies in each LTE band																
LTE Band 2																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860				
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880				
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900				
LTE Band 4																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720				
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5				
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745				
LTE Band 5																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829								
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5								
H	20643	848.3	20635	847.5	20625	846.5	20600	844								
LTE Band 7																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz									
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510								
M	21100	2535	21100	2535	21100	2535	21100	2535								
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560								
LTE Band 12																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz									
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704								
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5								
H	23173	715.3	23165	714.5	23155	713.5	23130	711								
LTE Band 13																
	Bandwidth 5 MHz				Bandwidth 10 MHz											
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)									
L	23205		779.5		23230		782									
M	23230		782													
H	23255		784.5													
LTE Band 14																
	Bandwidth 5 MHz				Bandwidth 10 MHz											
	Channel #		Channel #		23330		793									
L	23305		790.5													
M	23330		793													
H	23355		795.5													
LTE Band 17																
	Bandwidth 5 MHz				Bandwidth 10 MHz											
	Channel #		Freq.(MHz)		23800		711									
L	23755		706.5													
M	23790		710													
H	23825		713.5													



LTE Band 25														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860		
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880		
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905		
LTE Band 26														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5				
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5				
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5				
LTE Band 30														
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz					
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Freq.(MHz)					
L	27685		2307.5		27710		2310							
M	27710		2310											
H	27735		2312.5											
LTE Band 38														
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580						
M	38000	2595	38000	2595	38000	2595	38000	2595						
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610						
LTE Band 41														
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506						
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5						
M	40620	2593	40620	2593	40620	2593	40620	2593						
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5						
M	41565	2687.5	41540	2685	41515	2682.5	41490	2680						
LTE Band 48														
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560						
L	55810	3607	55815	3607.5	55820	3608	55830	3609						
M	56170	3643	56165	3642.5	56160	3642	56150	3641						
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690						
LTE Band 66														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720		
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745		
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770		
LTE Band 71														
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	133147	665.5	133172	668	133197	670.5	133222	673						
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5						
H	133447	695.5	133422	693	133397	690.5	133372	688						

**3.3 General 5G NR SAR Test and Reporting Considerations**

5G NR Information							
FCC ID	E2KFM350GL						
Equipment Name	5G Module						
Operating Frequency Range of each 5G NR transmission band	5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n25: 1850 MHz ~ 1915 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n71: 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz, 3450MHz ~ 3550MHz 5G NR n78: 3700 MHz ~ 3800 MHz, 3450MHz ~ 3550MHz						
Channel Bandwidth	5G NR n2: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n5: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n7: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n25: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n30: 5MHz, 10MHz 5G NR n38: 10MHz, 15MHz, 20MHz 5G NR n41: 10MHz, 15MHz, 20MHz, 40MHz, 50MHz, 60MHz, 80MHz, 90MHz, 100MHz 5G NR n48: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz 5G NR n66: 5MHz, 10MHz, 15MHz, 20MHz, 40MHz 5G NR n71: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n77/n78: 10MHz, 15MHz, 20MHz, 40MHz, 50MHz, 60MHz, 80MHz, 90MHz, 100MHz						
SCS	FDD/TDD: SCS15KHz and SCS30KHz						
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM QPSK / 16QAM / 64QAM / 256QAM						
A-MPR (Additional MPR) disabled for SAR Testing?	Yes						
LTE Anchor Bands for n2	LTE B12/13						
LTE Anchor Bands for n5	LTE B2/7/30/48/66						
LTE Anchor Bands for n41	LTE B2/41/66						
LTE Anchor Bands for n48	LTE B2/66						
LTE Anchor Bands for n66	LTE B5/12/13/48						
LTE Anchor Bands for n71	LTE B2						
LTE Anchor Bands for n77	LTE B2/5/12/13/14/30/41/66						
LTE Anchor Bands for n78	LTE B2/5/7/38						
NR Band 2							
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #
L	370500	1852.5	371000	1855	371500	1857.5	372000
M	376000	1880	376000	1880	376000	1880	376000
H	381500	1907.5	381000	1905	380500	1902.5	380000
NR Band 5							
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #
L	165300	826.5	165800	829	166300	831.5	166800
M	167300	836.5	167300	836.5	167300	836.5	167300
H	169300	846.5	168800	844	168300	841.5	167800
NR Band 7							
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #
L	500500	2502.5	501000	2505	501500	2507.5	502000
M	507000	2535	507000	2535	507000	2535	507000
H	513500	2567.5	513000	2565	512500	2562.5	512000
NR Band 25							
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #
L	370500	1852.5	371000	1855	371500	1857.5	372000
M	376500	1882.5	376500	1882.5	376500	1882.5	376500
H	382500	1912.5	382000	1910	381500	1907.5	381000

**FCC SAR TEST REPORT****Report No. : FA2N0217-01**

NR Band 30																													
	Bandwidth 5MHz							Bandwidth 10MHz																					
	Ch. #		Freq. (MHz)			Ch. #		Freq. (MHz)			Ch. #		Freq. (MHz)																
L	461500		2307.5																										
M	462000		2310											2310															
H	462500		2312.5																										
NR Band 38																													
	Bandwidth 10MHz				Bandwidth 15MHz				Bandwidth 20MHz																				
	Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)																		
L	515004		2575.02		515502		2577.51		516000		2580																		
M	519000		2595		519000		2595		519000		2595																		
H	522996		2614.98		522498		2612.49		522000		2610																		
NR Band 41																													
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth20MHz		Bandwidth40MHz		Bandwidth50MHz		Bandwidth60MHz		Bandwidth80MHz		Bandwidth90MHz	Bandwidth100MHz													
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)													
L	500202	2501.01	500700	2503.5	501204	2506.02	503202	2516.01	504204	2521.02	505200	2526	507204	2536.02	508200	2541	509202	2546.01											
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99											
H	537000	2685	536496	2682.48	535998	2679.99	534000	2670	532998	2664.99	531996	2659.98	529998	2649.99	528996	2644.98	528000	2640											
NR Band 48																													
	Bandwidth10MHz			Bandwidth 15MHz			Bandwidth20MHz			Bandwidth30MHz			Bandwidth40MHz																
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)													
L	637000	3555		637168		3557.52	637334		3560.01	637668		3565.02	638000		3570														
M	641666	3624.99		641666		3624.99	641666		3624.99	641666		3624.99	641666		3624.99														
H	646332	3694.98		646166		3692.49	646000		3690	645666		3684.99	645332		3679.98														
NR Band 66																													
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz			Bandwidth 40MHz																
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)													
L	342500	1712.5		343000		1715	343500		1717.5	344000		1720	346000		1730														
M	349000	1745		349000		1745	349000		1745	349000		1745	349000		1745														
H	355500	1777.5		355000		1775	354500		1772.5	354000		1770	352000		1760														
NR Band 71																													
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz			Bandwidth 40MHz																
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)													
L	133100	665.5		133600		668	13410		670.5	134600		673																	
M	136100	680.5		136100		680.5	136100		680.5	136100		680.5	136100		680.5														
H	139100	695.5		138600		693	13810		690.5	137600		688	137600		688														
NR Band 77																													
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz												
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)													
L	647000	3705	647168	3707.52	647334	3710.01	648000	3720	648334	3725.01	648668	3730.02	649334	3740.01	649668	3745.02	650000	3750											
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840											
H	665000	3975	664832	3972.48	664666	3969.99	664000	3960	663666	3954.99	663332	3949.98	662666	3939.99	662332	3934.98	662000	3930											
NR Band 78																													
	Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz			Bandwidth 40MHz			Bandwidth 50MHz			Bandwidth 60MHz			Bandwidth 80MHz			Bandwidth 90MHz			Bandwidth 100MHz				
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)			
L	647000	3705	647168	3707.52	647334	3710.01	648000	3720	648334	3725.01	648668	3730.02	649334	3740.01	649668	3745.02													
M	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750			
H	653000	3795	652832	3792.48	652666	3789.99	652000	3780	651666	3774.99	651332	3769.98	650666	3759.99	650332	3754.98													
NR Band 77/78(3450MHz ~ 3550MHz)																													
	Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz			Bandwidth 40MHz			Bandwidth 50MHz			Bandwidth 60MHz			Bandwidth 80MHz			Bandwidth 90MHz			Bandwidth 100MHz				
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)			
L	630334	3455.01	630500	3457.5	630668	3460.02	631334	3470.01	631668	3475.02	632000	3480	632668	3490.02	633000	3495													
M	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98			
H	636332	3544.98	636166	3542.49	636000	3540	635332	3529.98	635000	3525	634666	3519.99	634000	3510	633666	3504.99													


## 4. Proximity Sensor Triggering Test

### <Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

For the device is fully integrated, touch sensing capacitive sensor. It uses a charge transfer capacitive acquisition method that is capable of near range proximity detection. In this device offers a state of the art capacitive sensing engine with an embedded sampling capacitor and voltage regulator allowing the overall solution cost to be reduced and improving system immunity in noisy environments.

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated as following, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

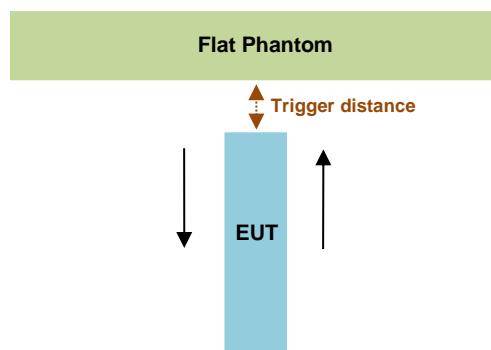


MIMO 2 Antenna				
Proximity Sensor Trigger Distance (mm)				
Position	Edge 1		Edge 4	
	moving toward	moving away	moving toward	moving away
Minimum	20	20	5	6

### <Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

Since the antenna and sensor are collocated and all of the peak SAR location is overlapping with the sensor pad for this device, therefore, According to KDB 616217 section6.3, these procedures do not apply and are not required for this device. Due to the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor on this device.

**<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>**

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at above separation distance. Rotating the tablet around the edge next to the phantom in  $\leq 10^\circ$  increments until the tablet is  $\pm 45^\circ$  from the vertical position at  $0^\circ$ , and the maximum output power remains in the reduced mode.

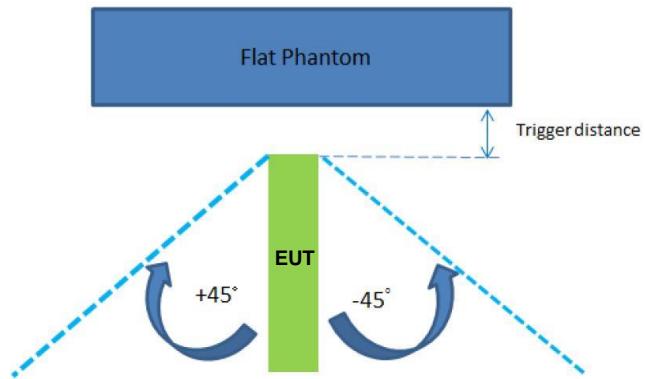

MIMO2 Antenna				
The Sensor Trigger Distance (mm)				
Position	Edge 1		Edge 4	
	+45	-45	45	-45
Minimum	25	28	16	18

Proximity sensor power reduction



Exposure Position / wireless mode	Bottom Face / Edge 1 / Edge 4 <sup>(1)</sup>
FR1 n48 MIMO2	3.5 dB



**Remark:**

1. <sup>(1)</sup>: Reduced maximum limit applied by activation of proximity sensor.
2. Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown as below.
3. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:

**(a) MIMO2**

- Edge1: [19 mm](#)
- Edge4: [4 mm](#)

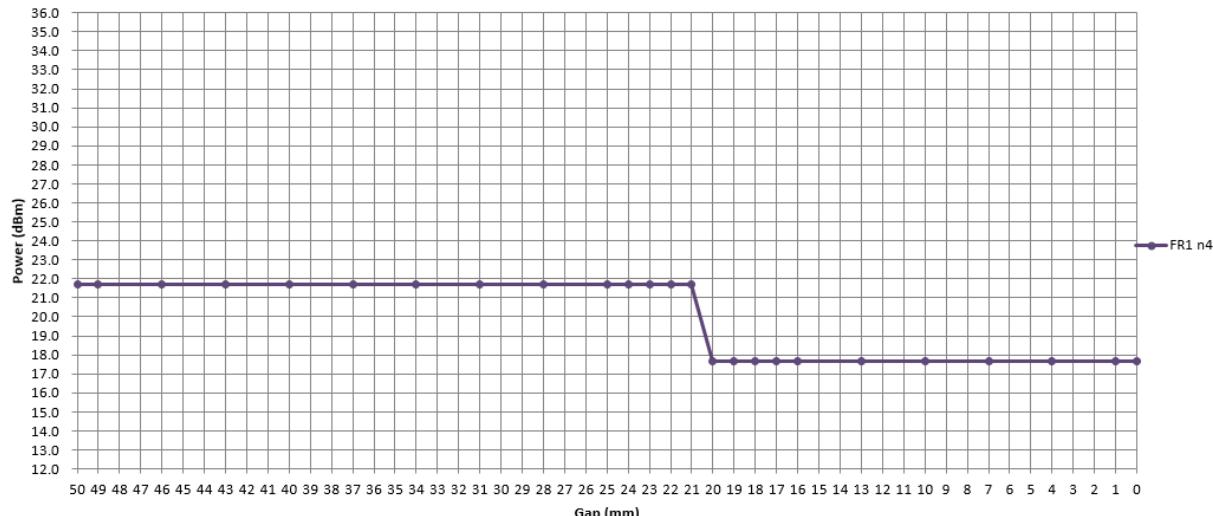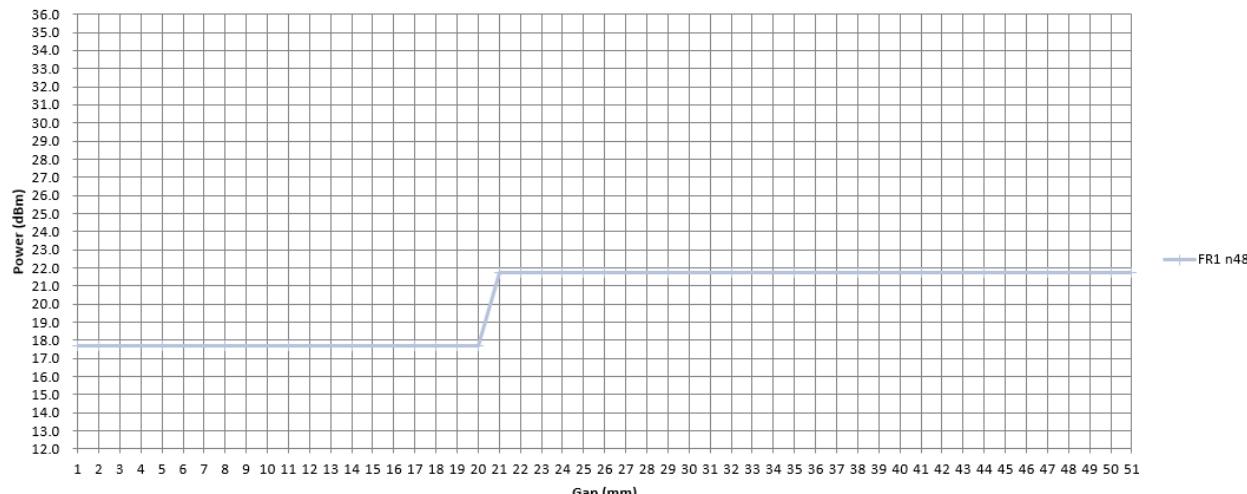Power Measurement during Sensor Trigger distance testing**<MIMO 2 Antenna>****Edge 1  
(moving toward phantom)****Edge 1  
(moving away phantom)**

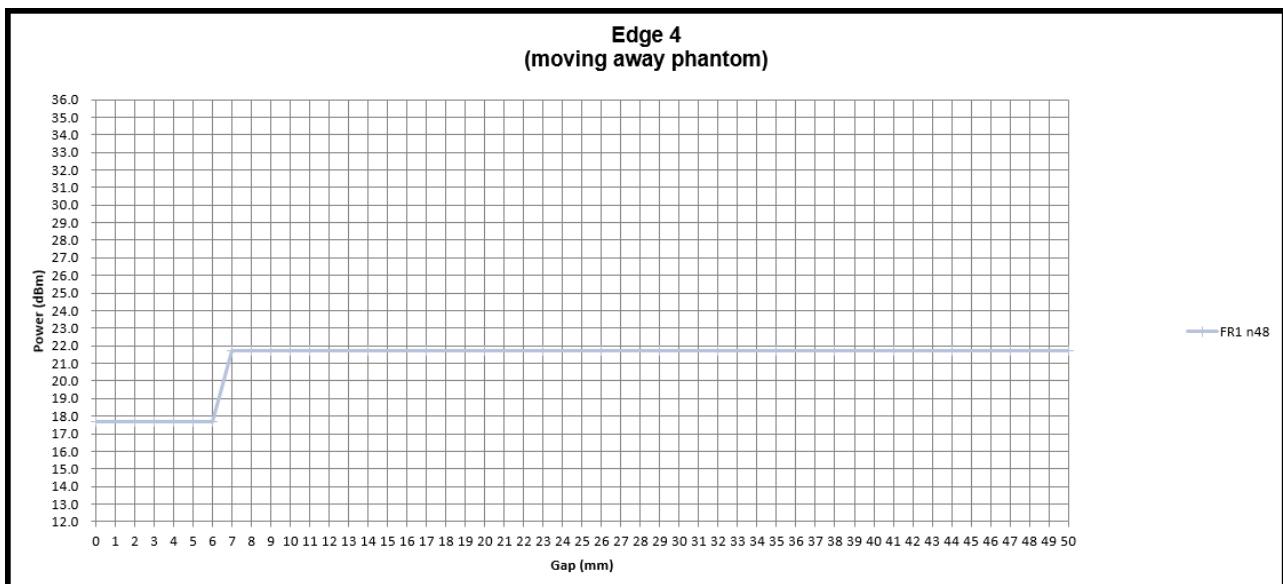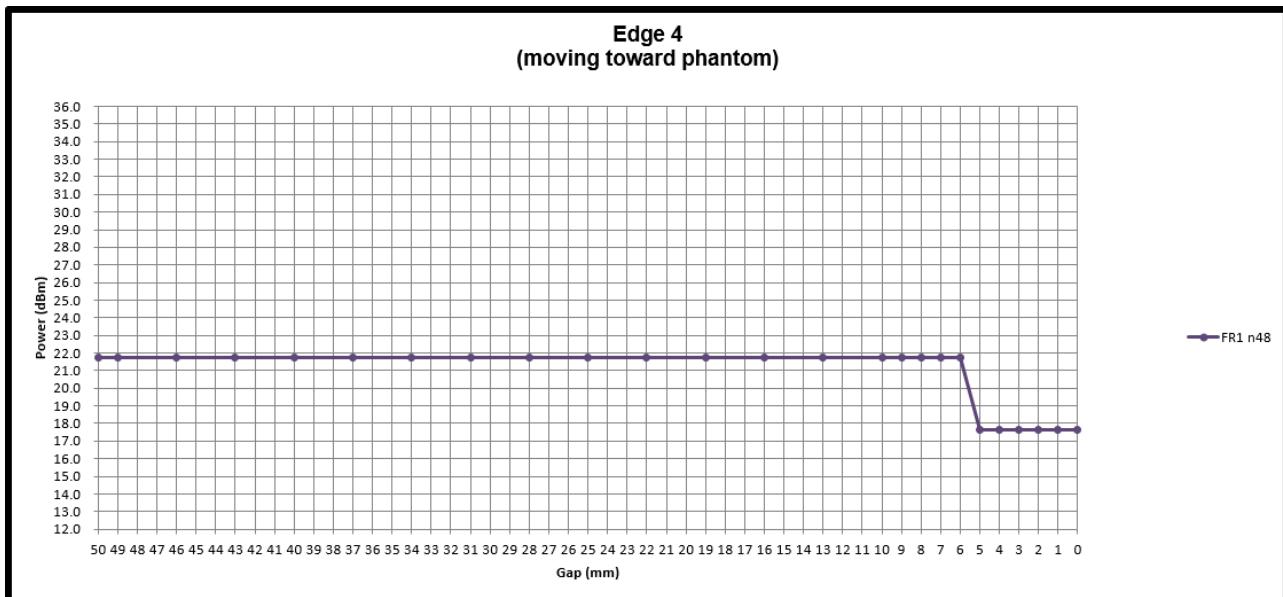



## 5. RF Exposure Limits

### 5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



## 6. Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and  $E$  is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

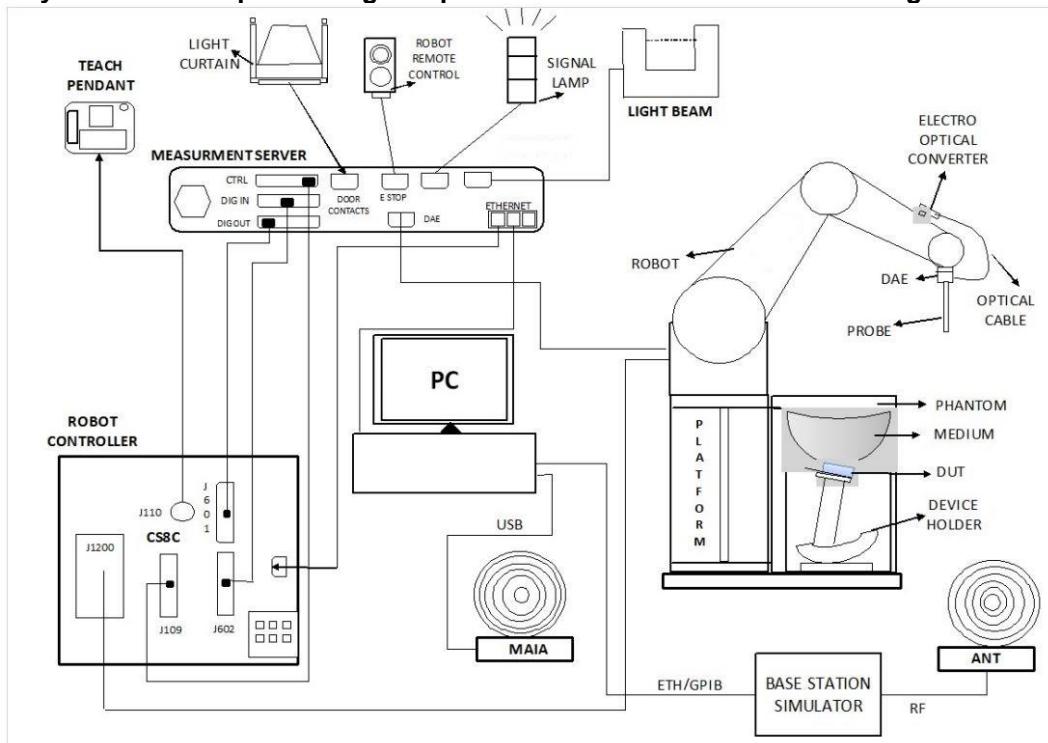

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 7.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY

## 7.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### <ES3DV3 Probe>

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

### <EX3DV4 Probe>

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

## 7.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


## 7.4 Phantom

### <SAM Twin Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	 A photograph of the SAM Twin Phantom. It is a rectangular phantom housed in a clear acrylic shell with a white base. A black device holder is positioned inside the shell. A white cover is visible above the phantom.
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

### <ELI Phantom>
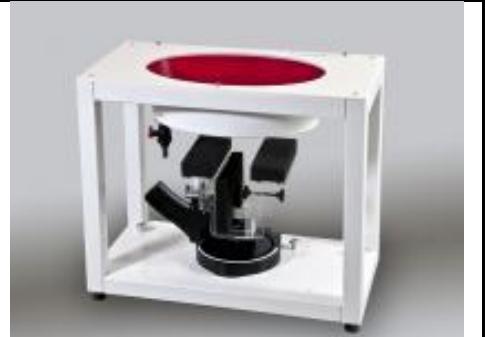
<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	 A photograph of the ELI Phantom. It is a cube-shaped phantom with a red circular top. A black device holder is positioned inside the phantom. A white cover is visible above the phantom.
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.



## 7.5 Device Holder

### <Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held  
Transmitters



Mounting Device Adaptor for Wide-  
Phones

### <Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



## **8. Measurement Procedures**

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



## **8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## **8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}$ , $\Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



## 8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$  graded grid	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
Minimum zoom scan volume	$x, y, z$	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

\* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is  $\leq 1.4$  W/kg,  $\leq 8$  mm,  $\leq 7$  mm and  $\leq 5$  mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

## 8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan are completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 8.6 Power Drift Monitoring

All SAR testing is under the EUT installed full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



## 9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	3700MHz System Validation Kit	D3700V2	1006	Jun. 20, 2022	Jun. 19, 2023
SPEAG	Data Acquisition Electronics	DAE4	1697	Dec. 15, 2022	Dec. 14, 2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	7694	Nov. 15, 2022	Nov. 14, 2023
Testo	Hygro meter	608-H1	45196600	Nov. 02, 2022	Nov. 01, 2023
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 12, 2022	Oct. 11, 2023
Keysight	ENA Network Analyzer	E5071C	MY46316648	Jul. 25, 2022	Jul. 24, 2023
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 28, 2022	Sep. 27, 2023
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3252	Jul. 25, 2022	Jul. 24, 2023
Anritsu	Power Meter	ML2495A	1419002	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Power Sensor	MA2411B	1911176	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Power Meter	ML2495A	1804003	Oct. 17, 2022	Oct. 16, 2023
Anritsu	Power Sensor	MA2411B	1726150	Oct. 17, 2022	Oct. 16, 2023
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 10, 2023	Jan. 09, 2024
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 19, 2021	Aug. 17, 2023
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 14, 2022	Oct. 13, 2023
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Sep. 15, 2022	Sep. 14, 2023
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

## 10. System Verification

### 10.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing.

#### < Tissue Dielectric Parameter Check Results >

Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
3700	22.5	3.169	37.274	3.12	37.70	1.57	-1.13	$\pm 5$	2023/4/7

### 10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR09	2023/4/7	3700	100	D3700V2-1006	EX3DV4 - SN7694	DAE4 Sn1697	6.350	65.600	63.5	-3.20

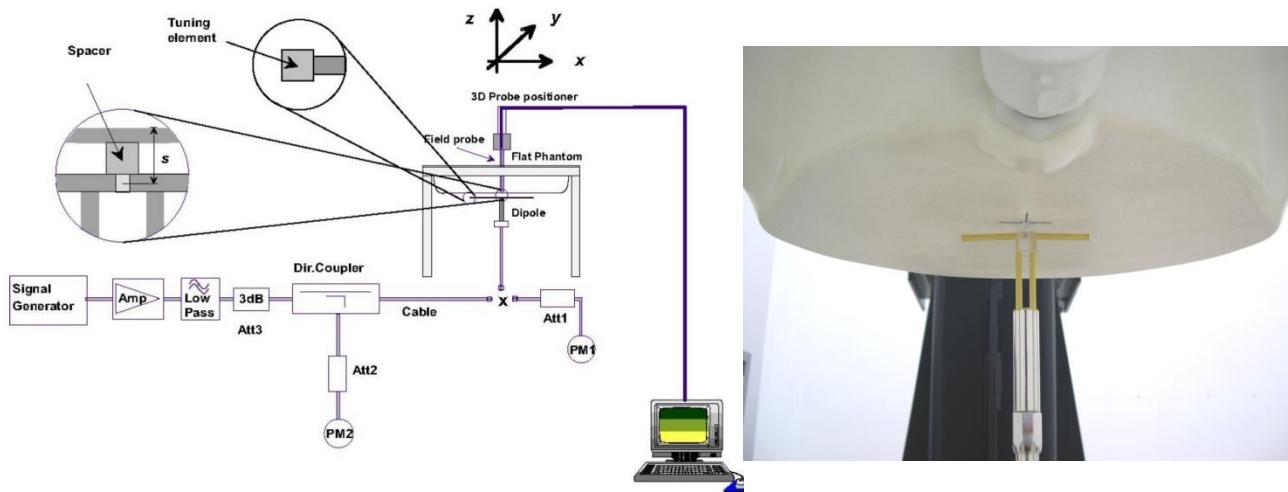


Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

## 11. RF Exposure Positions

### 11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.



## 12. 5G NR Output Power (Unit: dBm)

**General Note:**

1. The device support SCS 15KHz and 30KHz for NR FDD and TDD and have the same maximum power, in this report only select SCS 15KHz for NR FDD and SCS 30KHz for NR TDD power measurement, due to SCS 15KHz for FDD and SCS 30KHz for TDD have highest support bandwidth, and the NR SAR is < 1g SAR 1.45W/kg. Output power and SAR measurement for SCS30KHz for FDD and SCS15KHz for TDD shall be not necessary.
2. Referencing the procedure in KDB 941225, the test procedures are outlined as below
  - a. For DFT-OFDM output power measurement, full measurement was done for Pi/2 BPSK and QPSK and for the largest supported bandwidth, repeat test for 16QAM/64QAM/256QAM under 1RB 1Offset configuration. For smaller bandwidth, measure conducted power for Pi/2 BPSK and 1RB 1Offset configuration.
  - b. According to the tune-up, CP-OFDM output power is not  $\frac{1}{2}$  dB higher than DFT-OFDM mode, and the reported SAR of DFT-OFDM mode reported SAR is  $\leq 1.45$  W/kg, SAR test and thus conducted power for CP-OFDM mode is not required.
  - c. To start SAR test for the largest channel bandwidth for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. Also do SAR test for 50% RB allocation for PI/2 BPSK SAR testing using 1RB PI/2 BPSK allocation procedure
  - d. For PI/2 BPSK with 100% RB allocation, SAR test is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
  - e. For higher modulation QPSK/16QAM/64QAM/256QAM, according to tune-up document the power level is not  $\frac{1}{2}$  dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
  - f. Smaller bandwidth output power for each RB allocation configuration for this device is not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg, smaller bandwidth SAR testing is not required for this device.
  - g. The NR n5/41/66/71/77 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth.
  - h. The NR n38 SAR test was covered by NR n41; due to SAR test for overlapping LTE bands can be reduced if the maximum power including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion and the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
3. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission. And only for TDD power class2 was performed using Factory Test Mode software to establish the connection and perform SAR with 50% transmission.

**<3GPP 38.101 MPR for EN-DC>**

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5 <sup>1</sup> ≤ 0.5 <sup>2</sup>	≤ 1.2 <sup>1</sup> ≤ 0.5 <sup>2</sup>	≤ 0.2 <sup>1</sup> 0 <sup>2</sup>
	QPSK		≤ 1	0
	16 QAM		≤ 2	≤ 1
	64 QAM			≤ 2.5
	256 QAM			≤ 4.5
CP-OFDM	QPSK		≤ 3	≤ 1.5
	16 QAM		≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5		≤ 2.5
	256 QAM		≤ 4.5	
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

**FCC SAR TEST REPORT****Report No. : FA2N0217-01****<FR1 n48 MIMO2 Ant Default Power>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				638000	641666	645332	
Frequency (MHz)				3570	3624.99	3679.98	22.0
40	PI/2 BPSK	1	1	20.83	21.05	21.09	
40	PI/2 BPSK	1	53	21.60	21.72	21.37	
40	PI/2 BPSK	1	104	21.02	20.99	20.69	
40	PI/2 BPSK	50	0	21.44	21.57	21.51	
40	PI/2 BPSK	50	28	21.70	21.71	21.55	
40	PI/2 BPSK	50	56	21.46	21.42	21.15	
40	PI/2 BPSK	100	0	21.51	21.45	21.27	22.0
40	QPSK	1	1	20.90	20.95	21.05	
40	QPSK	1	53	21.61	21.64	21.35	
40	QPSK	1	104	20.89	20.94	20.69	
40	QPSK	50	0	21.43	21.48	21.49	
40	QPSK	50	28	21.71	21.71	21.53	
40	QPSK	50	56	21.55	21.37	21.20	
40	QPSK	100	0	21.41	21.48	21.30	
40	16QAM	1	1	20.82	20.99	21.00	22.0
40	64QAM	1	1	18.99	19.15	19.20	21.0
40	256QAM	1	1	17.42	17.57	17.72	19.0
Channel				637668	641666	645666	Tune-up limit (dBm)
Frequency (MHz)				3565.02	3624.99	3684.99	
30	PI/2 BPSK	1	1	20.72	20.95	21.01	22.0
Channel				637334	641666	646000	Tune-up limit (dBm)
Frequency (MHz)				3560.01	3624.99	3690	
20	PI/2 BPSK	1	1	20.90	21.06	21.09	22.0
Channel				637168	641666	646166	Tune-up limit (dBm)
Frequency (MHz)				3557.52	3624.99	3692.49	
15	PI/2 BPSK	1	1	20.89	21.08	21.11	22.0
Channel				637000	641666	646332	Tune-up limit (dBm)
Frequency (MHz)				3555	3624.99	3694.98	
10	PI/2 BPSK	1	1	20.91	21.09	21.15	22.0

**FCC SAR TEST REPORT**

Report No. : FA2N0217-01

**<FR1 n48 MIMO2 Ant Reduced Power>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				638000	641666	645332	
Frequency (MHz)				3570	3624.99	3679.98	
40	PI/2 BPSK	1	1	16.77	16.88	17.02	18.5
40	PI/2 BPSK	1	53	17.51	17.66	17.39	
40	PI/2 BPSK	1	104	16.98	16.83	16.73	
40	PI/2 BPSK	50	0	17.26	17.49	17.40	
40	PI/2 BPSK	50	28	17.59	17.63	17.52	18.5
40	PI/2 BPSK	50	56	17.39	17.25	17.09	18.5
40	PI/2 BPSK	100	0	17.31	17.33	17.29	
40	QPSK	1	1	16.68	16.85	17.02	
40	QPSK	1	53	17.48	17.42	17.29	18.5
40	QPSK	1	104	16.88	16.77	16.70	
40	QPSK	50	0	17.32	17.46	17.40	
40	QPSK	50	28	17.54	17.60	17.46	
40	QPSK	50	56	17.42	17.20	17.13	18.5
40	QPSK	100	0	17.34	17.30	17.32	
40	16QAM	1	1	16.64	16.85	16.84	
40	64QAM	1	1	16.54	16.66	16.70	
40	256QAM	1	1	16.82	16.56	17.11	18.5
Channel				637668	641666	645666	Tune-up limit (dBm)
Frequency (MHz)				3565.02	3624.99	3684.99	
30	PI/2 BPSK	1	1	16.72	16.85	17.00	18.5
Channel				637334	641666	646000	Tune-up limit (dBm)
Frequency (MHz)				3560.01	3624.99	3690	
20	PI/2 BPSK	1	1	16.75	16.93	17.02	18.5
Channel				637168	641666	646166	Tune-up limit (dBm)
Frequency (MHz)				3557.52	3624.99	3692.49	
15	PI/2 BPSK	1	1	16.77	16.95	17.04	18.5
Channel				637000	641666	646332	Tune-up limit (dBm)
Frequency (MHz)				3555	3624.99	3694.98	
10	PI/2 BPSK	1	1	16.77	16.97	17.04	18.5



### 13. Antenna Location

<For Tablet>




Front View

The separation distance for antenna to edge :

Antenna	To Edge1 (mm)	To Edge2 (mm)	To Edge3 (mm)	To Edge4 (mm)
WWAN Main/MIMO3 Antenna	< 5	9.55	196.20	182.15
WWAN Aux/MIMO2 Antenna	< 5	181.95	196.20	9.75
WLAN Antenna 1	197.50	76.35	< 5	194.35
WLAN/BT Antenna 2	59.59	5.75	126.75	291.45

&lt;For Laptop&gt;

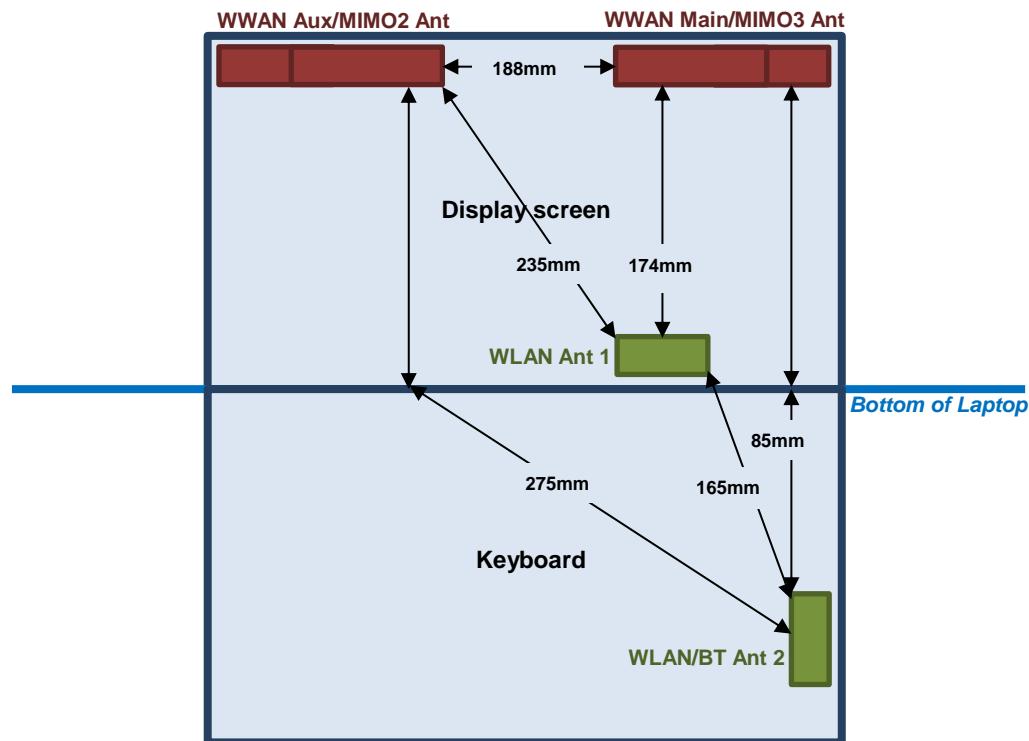

The separation distance for antenna to edge :

Antenna	To Bottom of Laptop (mm)
WWAN Main/MIMO3 Antenna	200.39
WWAN Aux/MIMO2 Antenna	200.39
WLAN Antenna 1	< 5
WLAN/BT Antenna 2	< 5

**<SAR test exclusion table>****General Note:**

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:  
[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] · [√f(GHz)] ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
  - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
  - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	FR1 Band n48
	Calculated Frequency (MHz)	3695
	Maximum power (dBm)	22.0
	Maximum rated power(mW)	158.49
Bottom Face	Separation distance(mm)	5.0
	exclusion threshold	60.9
	Testing required?	Yes
Edge 1	Separation distance(mm)	5.0
	exclusion threshold	60.9
	Testing required?	Yes
Edge 2	Separation distance(mm)	181.95
	exclusion threshold	1398.0
	Testing required?	No
Edge 3	Separation distance(mm)	196.20
	exclusion threshold	1540.0
	Testing required?	No
Edge 4	Separation distance(mm)	9.75
	exclusion threshold	31.3
	Testing required?	Yes
Bottom of Laptop	Separation distance(mm)	200.39
	exclusion threshold	1582.0
	Testing required?	No



## **14. SAR Test Results**

**General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - c. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$
  - $\leq 0.6 \text{ W/kg}$  or  $1.5 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between  $100 \text{ MHz}$  and  $200 \text{ MHz}$
  - $\leq 0.4 \text{ W/kg}$  or  $1.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200 \text{ MHz}$
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8 \text{ W/kg}$ .
4. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in sensor trigger distance was performed according to section 4. The test results just verification the sensor trigger distance to meet KDB 616217 requirement, when in normal usage will not operate at trigger distance, therefore, these results were not using performed Sim-Tx analysis.

**5G NR Note:**

1. Referencing the procedure in KDB 941225, the test procedures are outlined as below:
  - a. To start SAR test for the largest channel bandwidth for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. Also do SAR test for 50% RB allocation for PI/2 BPSK SAR testing using 1RB PI/2 BPSK allocation procedure
  - b. For PI/2 BPSK with 100% RB allocation, SAR test is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8 \text{ W/kg}$ . Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45 \text{ W/kg}$ , the remaining required test channels must also be tested.
  - c. For higher modulation QPSK/16QAM/64QAM/256QAM, according to tune-up document the power level is not  $\frac{1}{2} \text{ dB}$  higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than  $1.45 \text{ W/kg}$ , QPSK/16QAM/64QAM/256QAM SAR testing are not required.
  - d. Smaller bandwidth output power for each RB allocation configuration for this device is not  $\frac{1}{2} \text{ dB}$  higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45 \text{ W/kg}$ , smaller bandwidth SAR testing is not required for this device

**14.1 Body SAR****<5G NR SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n48_Ant MIMO2	40M	BPSK	1	53	Bottom Face	0mm	ON	641666	3624.99	Auden	17.66	18.50	1.213	0.04	0.239	0.290
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Bottom Face	0mm	ON	641666	3624.99	Auden	17.63	18.50	1.222	-0.06	0.271	0.331
	FR1 n48_Ant MIMO2	40M	BPSK	1	53	Edge 1	0mm	ON	641666	3624.99	Auden	17.66	18.50	1.213	0.03	0.908	1.102
	FR1 n48_Ant MIMO2	40M	BPSK	1	53	Edge 1	0mm	ON	638000	3570	Auden	17.51	18.50	1.256	-0.07	0.891	1.119
	FR1 n48_Ant MIMO2	40M	BPSK	1	53	Edge 1	0mm	ON	645332	3679.98	Auden	17.39	18.50	1.291	-0.05	0.856	1.105
01	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 1	0mm	ON	641666	3624.99	Auden	17.63	18.50	1.222	-0.05	0.942	1.151
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 1	0mm	ON	638000	3570	Auden	17.59	18.50	1.233	0.03	0.931	1.148
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 1	0mm	ON	645332	3679.98	Auden	17.52	18.50	1.253	0.09	0.909	1.139
	FR1 n48_Ant MIMO2	40M	BPSK	100	0	Edge 1	0mm	ON	641666	3624.99	Auden	17.33	18.50	1.309	0.06	0.863	1.130
	FR1 n48_Ant MIMO2	40M	BPSK	1	53	Edge 4	0mm	ON	641666	3624.99	Auden	17.66	18.50	1.213	0.01	0.271	0.329
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 4	0mm	ON	641666	3624.99	Auden	17.63	18.50	1.222	0.05	0.278	0.340
	FR1 n48_Ant MIMO2	40M	BPSK	1	53	Edge 1	19mm	OFF	641666	3624.99	Auden	21.72	22.00	1.067	-0.15	0.125	0.133
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 1	19mm	OFF	641666	3624.99	Auden	21.71	22.00	1.069	0.01	0.155	0.166
	FR1 n48_Ant MIMO2	40M	BPSK	1	53	Edge 4	4mm	OFF	641666	3624.99	Auden	21.72	22.00	1.067	-0.11	0.184	0.196
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 4	4mm	OFF	641666	3624.99	Auden	21.71	22.00	1.069	-0.06	0.223	0.238
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 1	0mm	ON	641666	3624.99	Speed	17.63	18.50	1.222	0.09	0.652	0.797

**14.2 Repeated SAR Measurement**

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 1	0mm	ON	641666	3624.99	Auden	17.63	18.50	1.222	-0.05	0.942	-	1.151
2nd	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 1	0mm	ON	641666	3624.99	Auden	17.63	18.50	1.222	-0.05	0.898	1.049	1.097

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8\text{W/kg}$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45\text{W/kg}$ , only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



## 15. Simultaneous Transmission Analysis

WWAN + WLAN <Intel AX211NGW>		
NO.	Simultaneous Transmission Configurations	Body
1.	WWAN Main + WWAN MIMO 2 + 2.4GHz WLAN Ant 1 + Bluetooth Ant 2	Yes
2.	WWAN Main + WWAN MIMO 2 + 2.4GHz WLAN Ant 1 + 2.4GHz WLAN Ant 2	Yes
3.	WWAN Main + WWAN MIMO 2 + WLAN5/6GHz Ant 1 + WLAN5/6GHz Ant 2 + Bluetooth Ant 2	Yes
4.	WWAN MIMO 3 + 2.4GHz WLAN Ant 1 + 2.4GHz WLAN Ant 2	Yes
5.	WWAN MIMO 3 + 2.4GHz WLAN Ant 1 + Bluetooth Ant 2	Yes
6.	WWAN MIMO 3 + WLAN5/6GHz Ant 1 + WLAN5/6GHz Ant 2 + Bluetooth Ant 2	Yes
7.	WWAN Aux + 2.4GHz WLAN Ant 1 + 2.4GHz WLAN Ant 2	Yes
8.	WWAN Aux + 2.4GHz WLAN Ant 1 + Bluetooth Ant 2	Yes
9.	WWAN Aux + WLAN5/6GHz Ant 1 + WLAN5/6GHz Ant 2 + Bluetooth Ant 2	Yes

WWAN + WLAN <REALTEK RTL8852BE>		
NO.	Simultaneous Transmission Configurations	Body
1.	WWAN Main + WWAN MIMO 2 + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2	Yes
2.	WWAN Main + WWAN MIMO 2 + WLAN5GHz Ant 1 + WLAN5GHz Ant 2 + Bluetooth Ant 2	Yes
3.	WWAN MIMO 3 + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2	Yes
4.	WWAN MIMO 3 + WLAN5GHz Ant 1 + WLAN5GHz Ant 2 + Bluetooth Ant 2	Yes
5.	WWAN Aux + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2	Yes
6.	WWAN Aux + WLAN5GHz Ant 1 + WLAN5GHz Ant 2 + Bluetooth Ant 2	Yes

**General Note:**

1. The Intel AX211NGW WLAN/BT module is integrated into this host. The WLAN 2.4GHz, 5GHz and Bluetooth SAR results are referenced from Intel SAR report, report number: 221026-01.TR02 (FCC ID: PD9AX211NG), WLAN 5.9GHz SAR referred to report No.: 221026-01.TR05 (FCC ID: PD9AX211NG), WLAN 6GHz SAR referred to new report No.: 221026-01.TR03 (FCC ID: PD9AX211NG) and these SAR results are also used to perform simultaneous transmission analysis.
2. The REALTEK RTL8852BE WLAN/Bluetooth module is also integrated into this host, WLAN/Bluetooth SAR testing data, which can be referred to Sporton SAR Test Report, Report No.: FA2N0214 (FCC ID: E2K-RTL8852BE) and the result is used to do simultaneous transmission analysis.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii) SPLSR =  $(\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where  $(x1, y1, z1)$  and  $(x2, y2, z2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If SPLSR  $\leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
  - v) The SPLSR calculated results please refer to section 16.2.

**15.1 Body Exposure Conditions****WWAN Main + WWAN MIMO2 + WLAN <Intel AX211NGW> + Bluetooth**

Exposure Position	0	1	2	3	4	5	6	0+1+2+3 Summed 1g SAR (W/kg)	0+1+4+5+6 Summed 1g SAR (W/kg)	0+1+2+6 Summed 1g SAR (W/kg)	SPLSR	Case No	
	Maximum WWAN Main	Maximum WWAN Mimo2	WLAN2.4GHz Ant 1	WLAN2.4GHz Ant 2	WLAN5/6GHz Ant 1	WLAN5/6GHz Ant 2	Bluetooth Ant 2						
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
Bottom Face at 0mm	0.562	1.057	0.050	0.030	0.070	1.140	0.010	1.699	2.839	1.679	0.030	Case 10	
Edge 1 at 0mm	1.317	1.284						2.601	2.601	2.601	0.020	Case 9	
Edge 2 at 0mm	0.257		0.400	0.010	0.400	0.740	0.010	0.667	1.407	0.667			
Edge 3 at 0mm			0.350	0.400	1.010	0.400	0.400	0.750	1.810	0.750	0.030	refer to Intel report section B.5.3	
Edge 4 at 0mm		1.045						1.045	1.045	1.045			
Bottom of Laptop at 0mm			0.440	0.010	1.130	0.420	0.010	0.450	1.560	0.450			

**WWAN MIMO3 / WWAN Aux + WLAN <Intel AX211NGW> + Bluetooth**

Exposure Position	0	2	3	4	5	6	0+2+3 Summed 1g SAR (W/kg)	0+4+5+6 Summed 1g SAR (W/kg)	0+2+6 Summed 1g SAR (W/kg)	SPLSR	Case No	
	Maximum WWAN	WLAN2.4GHz Ant 1	WLAN2.4GHz Ant 2	WLAN5/6GHz Ant 1	WLAN5/6GHz Ant 2	Bluetooth Ant 2						
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
Bottom Face at 0mm	0.077	0.050	0.030	0.070	1.140	0.010	0.157	1.297	0.137			
Edge 1 at 0mm	0.239						0.239	0.239	0.239			
Edge 2 at 0mm	0.366	0.400	0.010	0.400	0.740	0.010	0.776	1.516	0.776			
Edge 3 at 0mm		0.350	0.400	1.010	0.400	0.400	0.750	1.810	0.750	0.030	refer to Intel report section B.5.3	
Edge 4 at 0mm							0.000	0.000	0.000			
Bottom of Laptop at 0mm		0.440	0.010	1.130	0.420	0.010	0.450	1.560	0.450			
Bottom Face at 0mm	0.185	0.050	0.030	0.070	1.140	0.010	0.265	1.405	0.245			
Edge 1 at 0mm	1.391						1.391	1.391	1.391			
Edge 2 at 0mm		0.400	0.010	0.400	0.740	0.010	0.410	1.150	0.410			
Edge 3 at 0mm		0.350	0.400	1.010	0.400	0.400	0.750	1.810	0.750	0.03	refer to Intel report section B.5.3	
Edge 4 at 0mm	0.040						0.040	0.040	0.040			
Bottom of Laptop at 0mm		0.440	0.010	1.130	0.420	0.010	0.450	1.560	0.450			



## WWAN Main + WWAN MIMO2 + WLAN &lt;REALTEK RTL8852BE&gt; + Bluetooth

Exposure Position	0	1	2	3	4	5	6	0+1+2+3 Summed 1g SAR (W/kg)	0+1+4+5+6 Summed 1g SAR (W/kg)	SPLSR	Case No
	Maximum WWAN Main	Maximum WWAN MIMO2	WLAN2.4GHz Ant 1	WLAN2.4GHz Ant 2	WLAN5GHz Ant 1	WLAN5GHz Ant 2	Bluetooth Ant 2				
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
Bottom Face at 0mm	0.562	1.057	0.046	1.082	0.125	1.193	0.376	2.747	3.313	0.04	Case 3
Edge 1 at 0mm	1.317	1.284						2.601	2.601	0.02	Case 1
Edge 2 at 0mm	0.257			0.402		0.723	0.189	0.659	1.169		
Edge 3 at 0mm			0.476		1.150			0.476	1.150		
Edge 4 at 0mm		1.045						1.045	1.045		
Bottom of Laptop at 0mm			0.197	0.251	0.851	1.092	0.064	0.448	2.007	0.02	Case 2

## WWAN MIMO3 / WWAN Aux + WLAN &lt;REALTEK RTL8852BE&gt; + Bluetooth

WWAN Band	Exposure Position	0	2	3	4	5	6	0+2+3 Summed 1g SAR (W/kg)	0+4+5+6 Summed 1g SAR (W/kg)	SPLSR	Case No
		Maximum WWAN	WLAN2.4GHz Ant 1	WLAN2.4GHz Ant 2	WLAN5GHz Ant 1	WLAN5GHz Ant 2	Bluetooth Ant 2				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
Maximum WWAN MIMO3 Ant	Bottom Face at 0mm	0.077	0.046	1.082	0.125	1.193	0.376	1.205	1.771	0.040	Case 4
	Edge 1 at 0mm	0.239						0.239	0.239		
	Edge 2 at 0mm	0.366		0.402		0.723	0.189	0.768	1.278		
	Edge 3 at 0mm		0.476		1.150			0.476	1.150		
	Edge 4 at 0mm							0.000	0.000		
	Bottom of Laptop at 0mm		0.197	0.251	0.851	1.092	0.064	0.448	2.007	0.02	Case 2
Maximum WWAN Aux Ant	Bottom Face at 0mm	0.185	0.046	1.082	0.125	1.193	0.376	1.313	1.879	0.01	Case 5
	Edge 1 at 0mm	1.391						1.391	1.391		
	Edge 2 at 0mm			0.402		0.723	0.189	0.402	0.912		
	Edge 3 at 0mm		0.476		1.150			0.476	1.150		
	Edge 4 at 0mm	0.040						0.040	0.040		
	Bottom of Laptop at 0mm		0.197	0.251	0.851	1.092	0.064	0.448	2.007	0.02	Case 2



## 15.2 SPLSR Evaluation and Analysis


### General Note:

1. According to antenna location, the minimum distance between each transmit antenna is using for SPLSR analysis.
2. Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Therefore, the adjacent transmit antennas will be summed first, and then the SPLSR calculation will be evaluated with the farther transmitted antennas.
3. SPLSR =  $(\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$ . If SPLSR  $\leq 0.04$ , simultaneously transmission SAR measurement is not necessary

Case	Band	Position	SAR (W/kg)	Gap (mm)	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
9	LTE Band 25_Main	Edge 1	1.317	0mm	188.0	2.60	0.02	Not required
	LTE Band 48_MIMO2		1.284	0mm				




Case 10	Band	Position	SAR (W/kg)	Gap (mm)	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
LTE B30_Mian	Bottom Face	0.562	0mm	188.0	1.62	0.01	Not required	
n77_MIMO2								
LTE B30_Mian	Bottom Face	0.562	0mm	174.0	0.63	0.00	Not required	
WLAN5GHz Ant 1								
LTE B30_Mian	Bottom Face	0.562	0mm	85.0	1.71	0.03	Not required	
WLAN5GHz Ant 2+ Bluetooth Ant 2								
n77_MIMO2	Bottom Face	1.057	0mm	235.0	1.13	0.01	Not required	
WLAN5GHz Ant 1								
n77_MIMO2	Bottom Face	1.057	0mm	275.0	2.21	0.01	Not required	
WLAN5GHz Ant 2+ Bluetooth Ant 2								
WLAN5GHz Ant 1	Bottom Face	0.07	0mm	165.0	1.22	0.01	Not required	
WLAN5GHz Ant 2+ Bluetooth Ant 2								
LTE B30_Mian	Bottom Face	0.562	0mm	174.0	0.61	0.00	Not required	
WLAN2.4GHz_Ant 1								
LTE B30_Mian	Bottom Face	0.562	0mm	85.0	0.59	0.01	Not required	
WLAN2.4GHz_Ant 2								
n77_MIMO2	Bottom Face	1.057	0mm	235.0	1.11	0.00	Not required	
WLAN2.4GHz_Ant 1								
n77_MIMO2	Bottom Face	1.057	0mm	275.0	1.09	0.00	Not required	
WLAN2.4GHz_Ant 2								
WLAN2.4GHz_Ant 1	Bottom Face	0.05	0mm	165.0	0.08	0.00	Not required	
WLAN2.4GHz_Ant 2								
LTE B30_Mian	Bottom Face	0.562	0mm	85.0	0.57	0.01	Not required	
Bluetooth Ant 2								
n77_MIMO2	Bottom Face	1.057	0mm	275.0	1.07	0.00	Not required	
Bluetooth Ant 2								

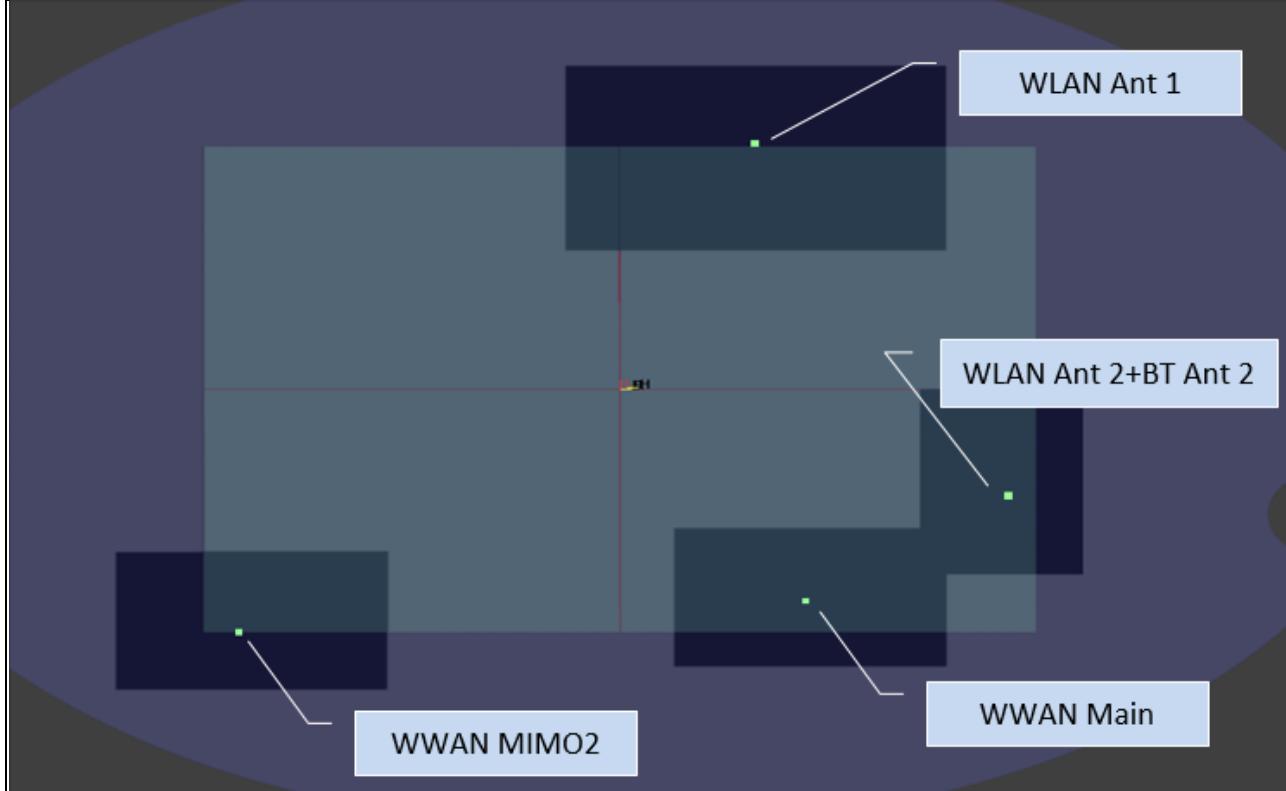



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
1	LTE Band 25_Main	Edge 1	1.317	0	1.6	98.5	-0.82	231.9	2.60	0.02	Not required
	LTE Band 48_MIMO2		1.284	0	1.3	-133.4	3.73				

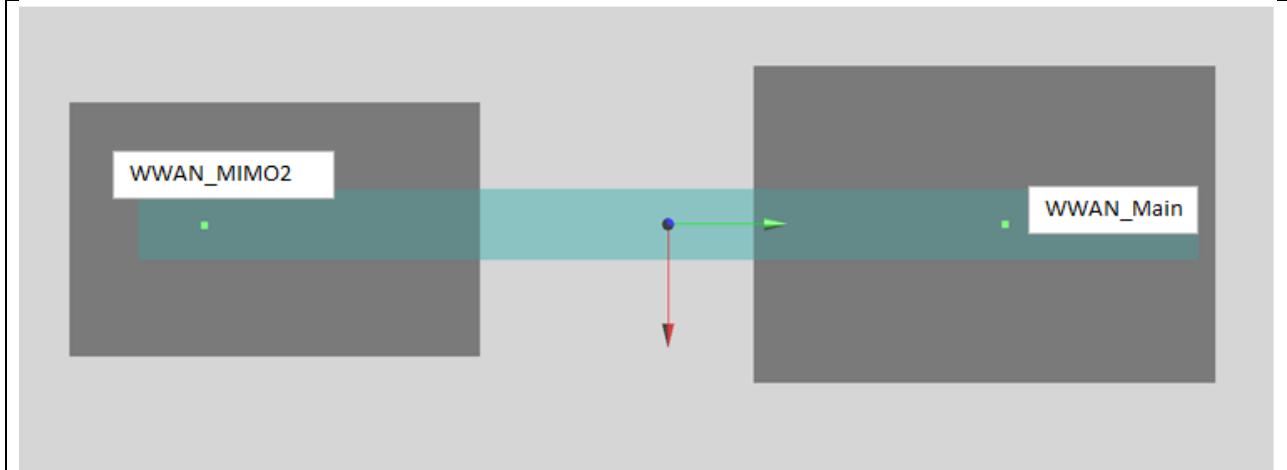


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
2	WLAN5GHz Ant 1	Bottom of Laptop	0.851	0mm	111.4	40	2.19	179.9	2.01	0.02	Not required
	WLAN5GHz Ant 2+ Bluetooth Ant 2		1.156	0mm	-32.6	147.8	0.15				






Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
3	LTE B30_Mian	Bottom Face	0.562	0mm	83	72.5	-179.7	217.1	1.62	0.01	Not required
	n77_MIMO2		1.057	0mm	105	-143.5	-179.4				
3	LTE B30_Mian	Bottom Face	0.562	0mm	83	72.5	-179.7	189.7	0.69	0.00	Not required
	WLAN5GHz Ant 1		0.125	0mm	-104.6	44.4	-177				
3	LTE B30_Mian	Bottom Face	0.562	0mm	83	72.5	-179.7	71.9	2.13	0.04	Not required
	WLAN5GHz Ant 2+Bluetooth Ant 2		1.569	0mm	43.4	132.5	-177				
3	n77_MIMO2	Bottom Face	1.057	0mm	105	-143.5	-179.4	281.5	1.18	0.00	Not required
	WLAN5GHz Ant 1		0.125	0mm	-104.6	44.4	-177				
3	n77_MIMO2	Bottom Face	1.057	0mm	105	-143.5	-179.4	282.8	2.63	0.02	Not required
	WLAN5GHz Ant 2+Bluetooth Ant 2		1.569	0mm	43.4	132.5	-177				
3	WLAN5GHz Ant 1	Bottom Face	0.125	0mm	-104.6	44.4	-177	172.2	1.69	0.01	Not required
	WLAN5GHz Ant 2+Bluetooth Ant 2		1.569	0mm	43.4	132.5	-177				
3	LTE B30_Mian	Bottom Face	0.562	0mm	83	72.5	-179.7	195.3	0.61	0.00	Not required
	WLAN2.4GHz_Ant 1		0.046	0mm	-105	125.5	-177				
3	LTE B30_Mian	Bottom Face	0.562	0mm	83	72.5	-179.7	71.3	1.64	0.03	Not required
	WLAN2.4GHz_Ant 2		1.082	0mm	50.7	136	-177				
3	n77_MIMO2	Bottom Face	1.057	0mm	105	-143.5	-179.4	341.3	1.10	0.00	Not required
	WLAN2.4GHz_Ant 1		0.046	0mm	-105	125.5	-177				
3	n77_MIMO2	Bottom Face	1.057	0mm	105	-143.5	-179.4	284.7	2.14	0.01	Not required
	WLAN2.4GHz_Ant 2		1.082	0mm	50.7	136	-177				
3	WLAN2.4GHz_Ant 1	Bottom Face	0.046	0mm	-105	125.5	-177	156.1	1.13	0.01	Not required
	WLAN2.4GHz_Ant 2		1.082	0mm	50.7	136	-177				

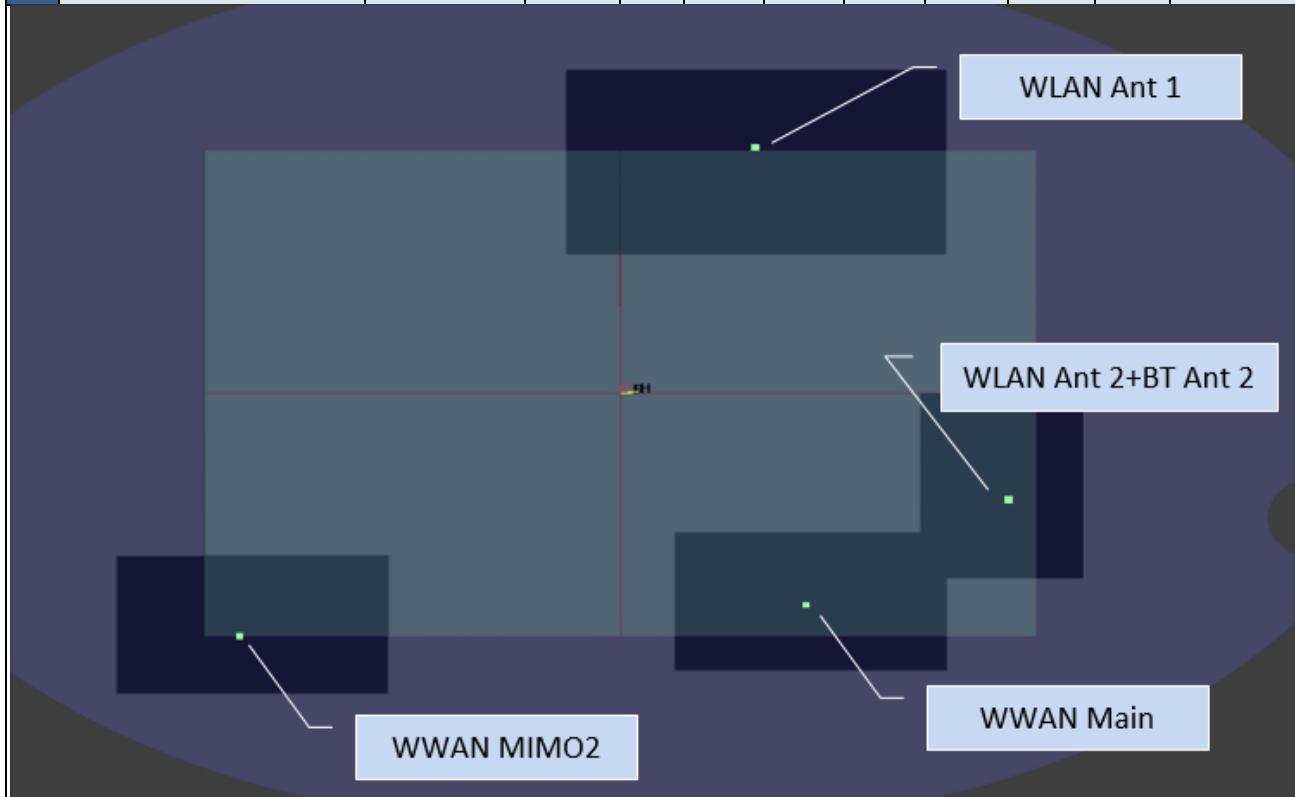




Case 2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
WLAN5GHz Ant 1	Bottom of Laptop	0.851	0mm	111.4	40	2.19	179.9	2.01	0.02	Not required	
			1.156	0mm	-32.6	147.8	0.15				

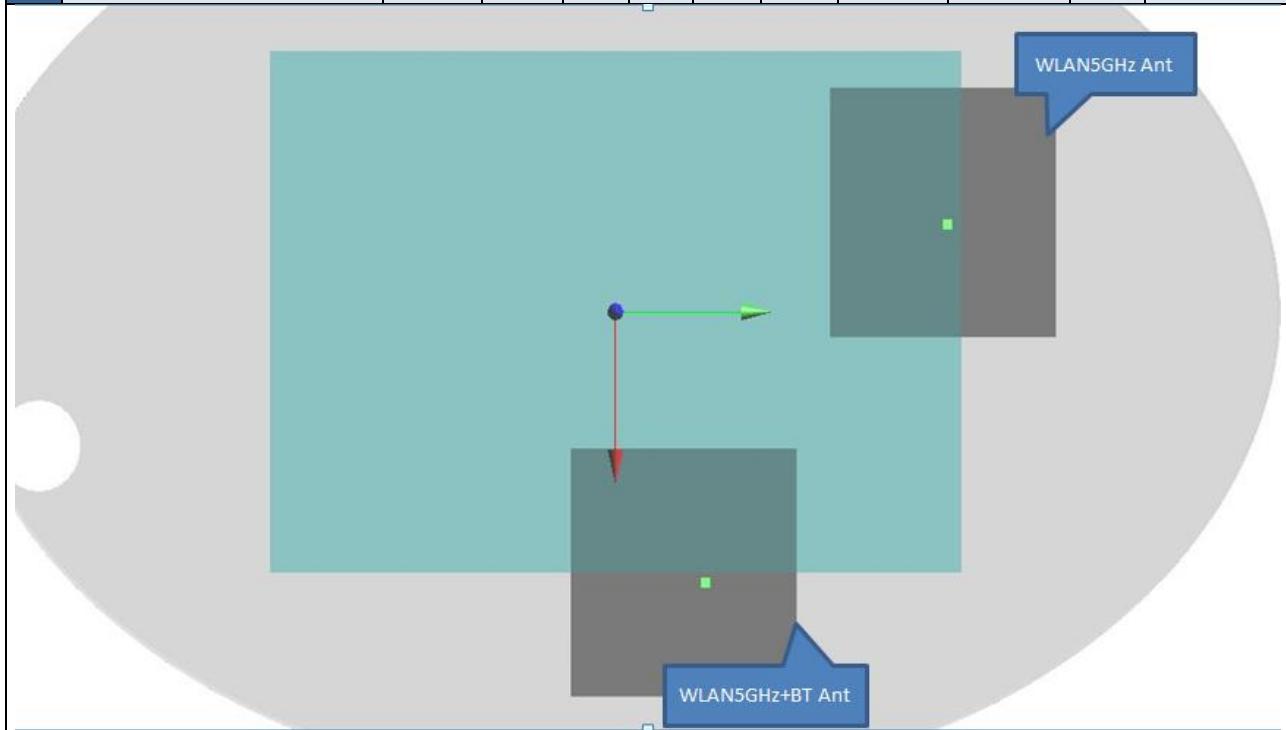




Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
4	FR1 n41_MIMO3	Bottom Face	0.077	0mm	95.1	127.4	-177	216.3	0.20	0.00	Not required
	WLAN5GHz Ant 1		0.125	0mm	-104.6	44.4	-177				
	FR1 n41_MIMO3	Bottom Face	0.077	0mm	95.1	127.4	-177	52.0	1.65	0.04	Not required
	WLAN5GHz Ant 2+ Bluetooth Ant 2		1.569	0mm	43.4	132.5	-177				
	WLAN5GHz Ant 1	Bottom Face	0.125	0mm	-104.6	44.4	-177	172.2	1.69	0.01	Not required
	WLAN5GHz Ant 2+ Bluetooth Ant 2		1.569	0mm	43.4	132.5	-177				

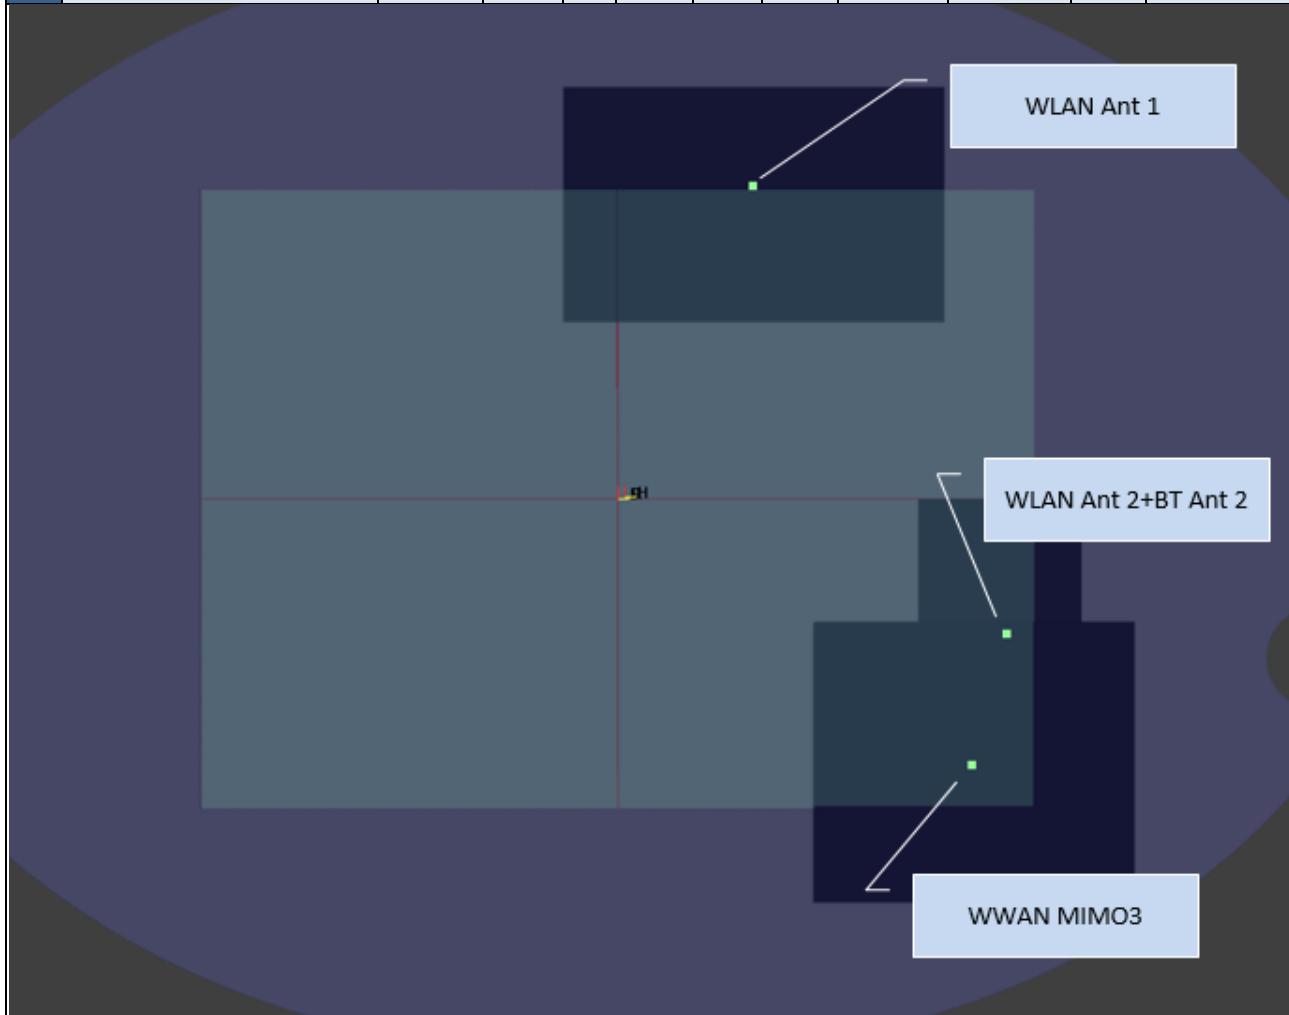



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
5	FR1 n41_Aux	Bottom Face	0.185	0mm	104	-64.2	-173.8	235.2	0.31	0.00	Not required
	WLAN5GHz Ant 1		0.125	0mm	-104.6	44.4	-177				
	FR1 n41_Aux	Bottom Face	0.185	0mm	104	-64.2	-173.8	205.8	1.75	0.01	Not required
	WLAN5GHz Ant 2+ Bluetooth Ant 2		1.569	0mm	43.4	132.5	-177				
	WLAN5GHz Ant 1	Bottom Face	0.125	0mm	-104.6	44.4	-177	172.2	1.69	0.01	Not required
	WLAN5GHz Ant 2+ Bluetooth Ant 2		1.569	0mm	43.4	132.5	-177				

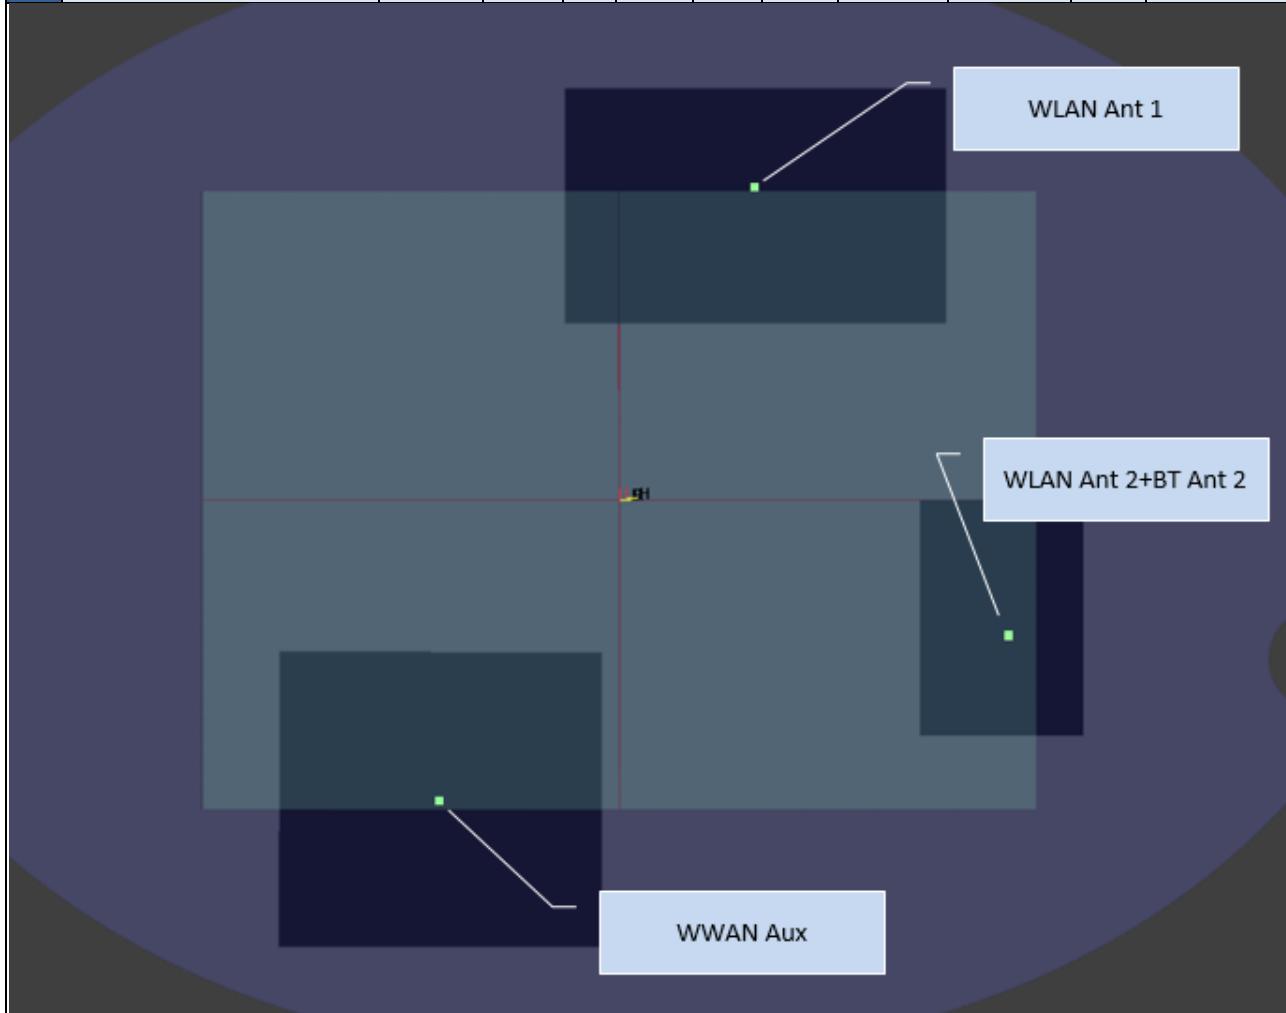

Test Engineer : Chris Yang, Shane Song, Kevin Guo and Jeff Tsao



## **16. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## **17. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [6] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [7] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [8] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [9] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.