

Annex A. Plots of SAR and Power Density System Verification

The plots for system verification are shown as follows.

Measurement Report for Device

S01 System Check_H6.5GHz_211124

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Speag 6.5GHz System Valisation Kit	50.0 x 10.0 x 8.0		6.5GHzV2 Valisation Kit

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		,	6500.0,	5.65	6.15	34.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T72N2, 2021-Nov-24	EX3DV4 - SN7472, 2021-06-03	DAE4 Sn1277, 2021-01-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	52.5 x 82.5	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2021-11-24	2021-11-24
psSAR1g [W/Kg]	23.7	29.5
psSAR10g [W/Kg]	4.96	5.44
Power Drift [dB]	0.02	0.00

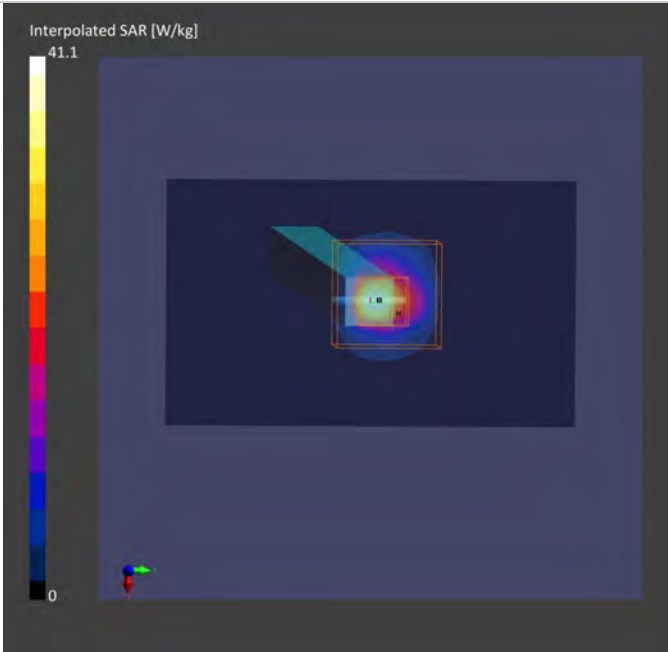

Measurement Report for Device

S02 System Check_H6.5GHz_211124

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Speag 6.5GHz System Valisation Kit	50.0 x 10.0 x 8.0		6.5GHzV2 Valisation Kit

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		,	6500.0,	5.65	6.15	34.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T72N2, 2021-Nov-24	EX3DV4 - SN7472, 2021-06-03	DAE4 Sn1277, 2021-01-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	52.5 x 82.5	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2021-11-24	2021-11-24
psSAR1g [W/Kg]	23.7	29.5
psSAR10g [W/Kg]	4.96	5.44
Power Drift [dB]	0.02	0.00

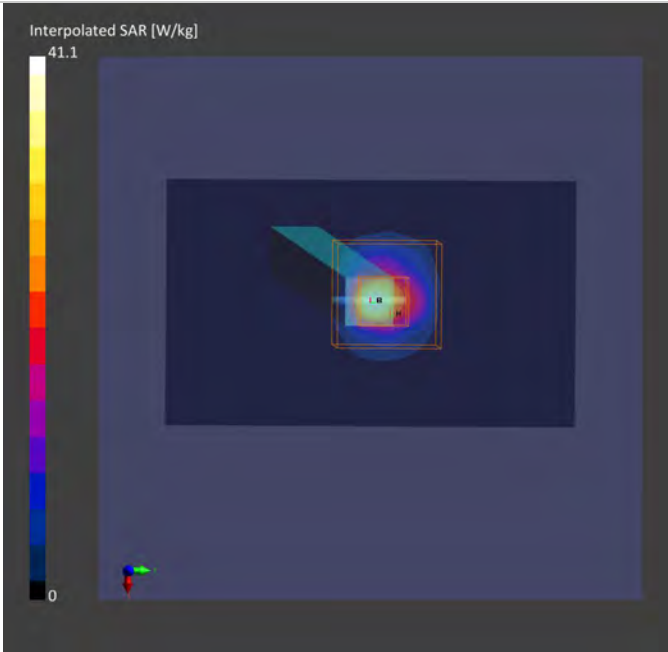

Test Lab: Bureau Veritas ADT SAR/HAC/PD Testing Lab

Power Density Plot No.:

S01 PD_System Check_10 GHz_2021.11.24

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG	100.0 x 100.0 x 172.0	SN: 1025	5G Verification Source 10 GHz

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5GAir	Front 10.00	Validation band	CW	10000.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air---	EUmmWV4 - SN9438_F1-55GHz, 2021-07-26	DAE4 Sn1277, 2021-01-19

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

	5G Scan
Date	2021-11-24
Avg. Area [cm ²]	4.00
pStotavg[W/m ²]	42.1
pSnavg [W/m ²]	41.8
E _{peak} [V/m]	136
Power Drift [dB]	0.01

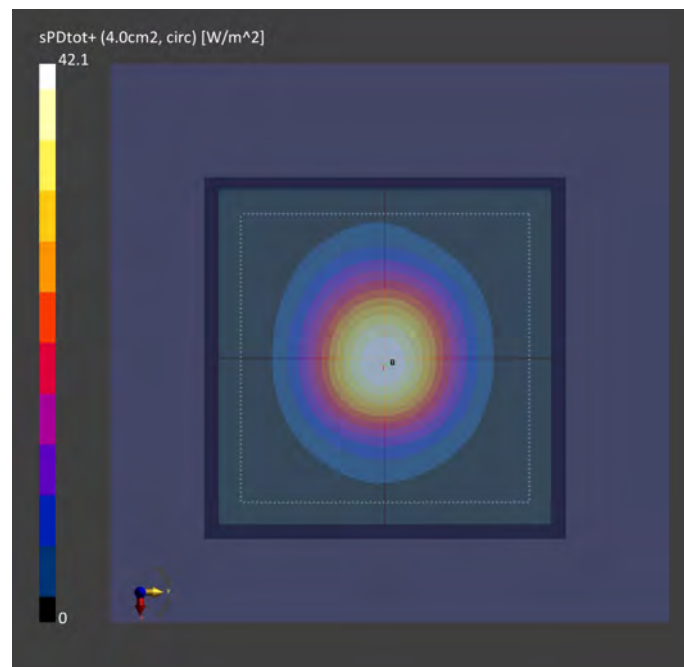

Test Lab: Bureau Veritas ADT SAR/HAC/PD Testing Lab

Power Density Plot No.:

S02 PD_System Check_10 GHz_2021.11.24

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG	100.0 x 100.0 x 172.0	SN: 1025	5G Verification Source 10 GHz

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5GAir	Front 10.00	Validation band	CW	10000.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air---	EUmmWV4 - SN9438_F1-55GHz, 2021-07-26	DAE4 Sn1277, 2021-01-19

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

	5G Scan
Date	2021-11-24
Avg. Area [cm ²]	4.00
pStotavg[W/m ²]	42.1
pSnavg [W/m ²]	41.8
E _{peak} [V/m]	136
Power Drift [dB]	0.01

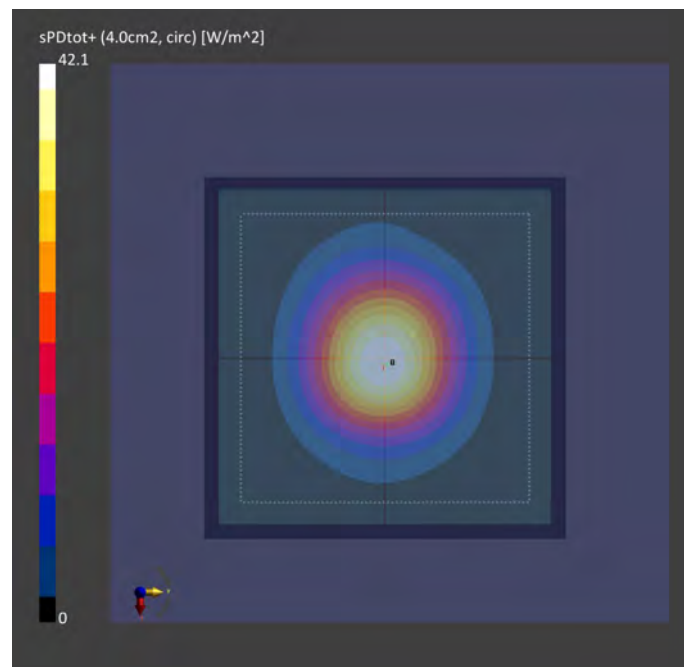

Annex B. Plots of SAR and Power Density Measurement

The plots for highest measured SAR and Power Density in each exposure configuration, wireless mode and frequency band combination are shown as follows.

Measurement Report

P01 UNII-5_802.11ax HE160_Top Side_0mm_Ch15_Sample2_Ant 0_P-Sensor_w

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P21080879	316.0 x 214.0 x 20.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Side, 0.00	U-NII-5	WLAN, 10755-AAB	6025.0, 15	5.65	5.60	34.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T72N2, 2021-Nov-24	EX3DV4 - SN7472, 2021-06-03	DAE4 Sn1277, 2021-01-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2021-11-24	2021-11-24
psSAR1g [W/Kg]	0.616	0.709
psSAR10g [W/Kg]	0.178	0.186
Power Drift [dB]	0.03	0.05

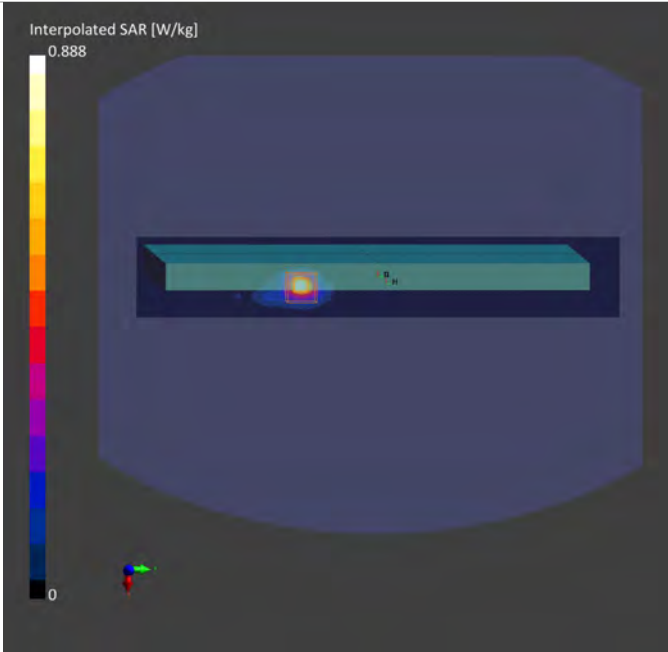

Measurement Report

P02 UNII-5_802.11ax HE160_Bottom_0mm_Ch79_Sample2_Ant 1_P-Sensor_w

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P21080879	316.0 x 214.0 x 20.0		Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom, 0.00	U-NII-5	WLAN, 10755-AAB	6345.0, 79	5.65	5.92	33.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T72N2, 2021-Nov-24	EX3DV4 - SN7472, 2021-06-03	DAE4 Sn1277, 2021-01-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	75.0 x 285.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2021-11-24	2021-11-24
psSAR1g [W/Kg]	0.367	0.405
psSAR10g [W/Kg]	0.093	0.093
Power Drift [dB]	0.16	-0.07

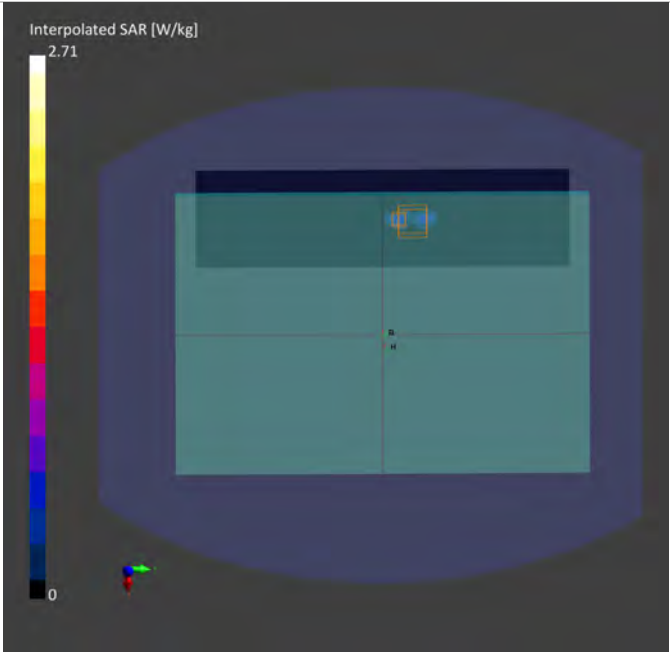

Test Lab: Bureau Veritas ADT SAR/HAC/PD Testing Lab

Power Density Plot No.:

P01 UNII-5_802.11ax HE160_Top Side_0mm_Ch15_Sample2_Ant 0_P-Sensow_w

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P21080879	316.0 x 214.0 x 20.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5GAir	Top Side 2.00	U-NII-5	WLAN 10755	6025.0 15	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air---	EUmmWV4 - SN9438_F1-55GHz, 2021-07-26	DAE4 Sn1277, 2021-01-19

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Date	2021-11-24
Avg. Area [cm ²]	4.00
pStotavg[W/m ²]	2.11
pSnavg [W/m ²]	1.65
E _{peak} [V/m]	39.1
Power Drift [dB]	0.15

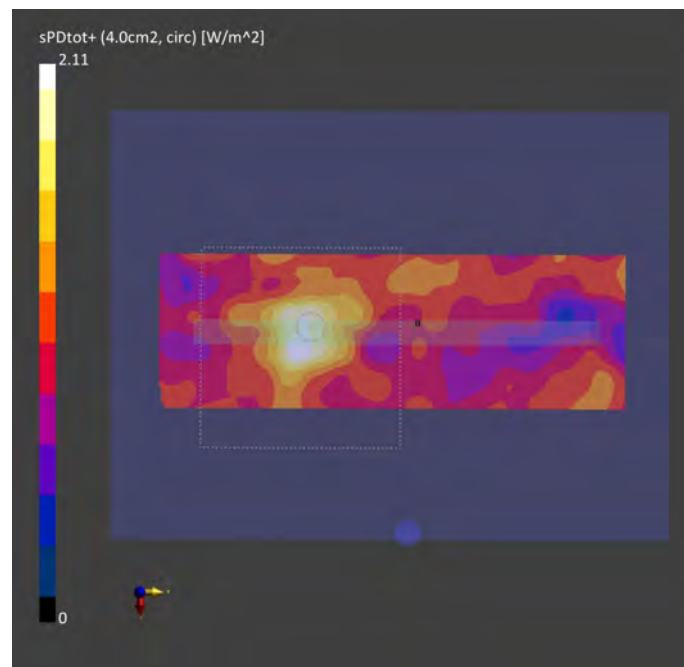

Test Lab: Bureau Veritas ADT SAR/HAC/PD Testing Lab

Power Density Plot No.:

P02 UNII-5_802.11ax HE160_Bottom_0mm_Ch79_Sample2_Ant 1_P-Sensow_w

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P21080879	316.0 x 214.0 x 20.0		Laptop

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5GAir	Bottom 2.00	U-NII-5	WLAN 10755	6345.0 79	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air---	EUmmWV4 - SN9438_F1-55GHz, 2021-07-26	DAE4 Sn1277, 2021-01-19

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Date	2021-11-24
Avg. Area [cm ²]	4.00
pStotavg[W/m ²]	2.54
pSnavg [W/m ²]	2.33
E _{peak} [V/m]	46.2
Power Drift [dB]	-0.18

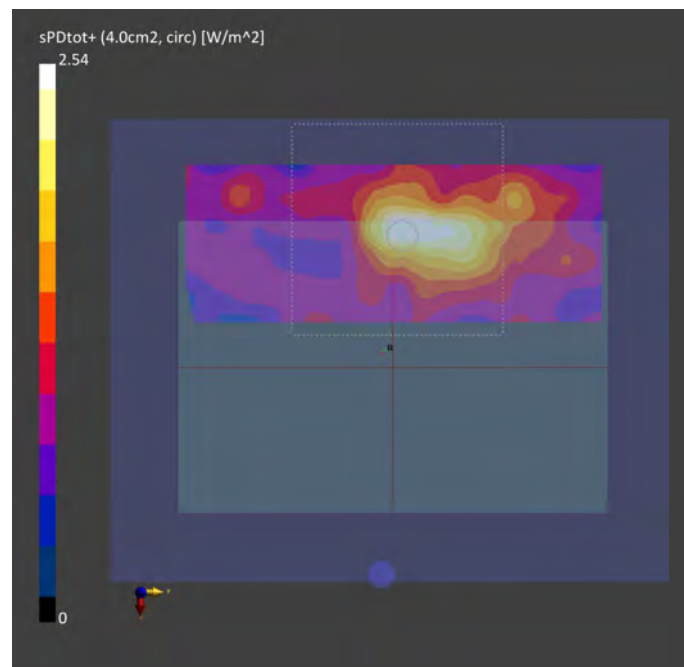

Annex C. Tissue & System Verification

The measuring results for tissue simulating liquid and system check are shown as below.

Note:

1. For Section 4.3, the dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within $\pm 10\%$ of the target values. Liquid temperature during the SAR testing has kept within $\pm 2^\circ\text{C}$.
2. For Section 4.4, The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.
3. For Section 4.5, Comparing to the reference SAR value provided by SPEAG in dipole calibration certificate, the deviation of system check results is within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots please refer to Annex A of this report.

Tissue Verification									Validation for CW			Validation for Modulation				System Validation					Note			
Plot No.	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Targeted Conductivity (σ)	Targeted Permittivity (ε _r)	Deviation Conductivity (σ)	Deviation Permittivity (ε _r)	Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	Date	Frequency (MHz)	Targeted 1g SAR (W/kg)	Measured 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dB)
S01	6500	23.3	6.15	34.2	6.07	34.5	1.32	-0.87	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 24, 2021	6500	290.00	29.5	295.00	1.72	1029	7472	1277	20
S02	6500	23.3	6.15	34.2	6.07	34.5	1.32	-0.87	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 24, 2021	6500	290.00	29.5	295.00	1.72	1029	7472	1277	20

Plot No.	Test Date	Frequency [GHz]	mmWave Probe S/N	Verification Source S/N	Averaging Area [cm ²]	Distance [mm]	Target Power Density [W/m ²]	Measured Power Density [W/m ²]	Deviation [%]
S01	Nov. 24, 2021	10	9438	1025	4	10.0	42.7	42.1	-1.41%
S02	Nov. 24, 2021	10	9438	1025	4	10.0	42.7	42.1	-1.41%

Annex D. Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

WLAN Tune-up Power (Laptop Full)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	5.0	5.0	2.0	2.0	5.0
	5	5975	5.0	5.0	2.0	2.0	5.0
	9	5995	5.0	5.0	2.0	2.0	5.0
	13	6015	5.0	5.0	2.0	2.0	5.0
	17	6035	5.0	5.0	2.0	2.0	5.0
	21	6055	5.0	5.0	2.0	2.0	5.0
	25	6075	5.0	5.0	2.0	2.0	5.0
	29	6095	5.0	5.0	2.0	2.0	5.0
	33	6115	5.0	5.0	2.0	2.0	5.0
	37	6135	5.0	5.0	2.0	2.0	5.0
	41	6155	5.0	5.0	2.0	2.0	5.0
	45	6175	5.0	5.0	2.0	2.0	5.0
	49	6195	5.0	5.0	2.0	2.0	5.0
	53	6215	5.0	5.0	2.0	2.0	5.0
	57	6235	5.0	5.0	2.0	2.0	5.0
	61	6255	5.0	5.0	2.0	2.0	5.0
	65	6275	5.0	5.0	2.0	2.0	5.0
	69	6295	5.0	5.0	2.0	2.0	5.0
	73	6315	5.0	5.0	2.0	2.0	5.0
	77	6335	5.0	5.0	2.0	2.0	5.0
	81	6355	5.0	5.0	2.0	2.0	5.0
	85	6375	5.0	5.0	2.0	2.0	5.0
	89	6395	5.0	5.0	2.0	2.0	5.0
	93	6415	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	3	5965	8.0	8.0	5.0	5.0	8.0
	11	6005	8.0	8.0	5.0	5.0	8.0
	19	6045	8.0	8.0	5.0	5.0	8.0
	27	6085	8.0	8.0	5.0	5.0	8.0
	35	6125	8.0	8.0	5.0	5.0	8.0
	43	6165	8.0	8.0	5.0	5.0	8.0
	51	6205	8.0	8.0	5.0	5.0	8.0
	59	6245	8.0	8.0	5.0	5.0	8.0
	67	6285	8.0	8.0	5.0	5.0	8.0
	75	6325	8.0	8.0	5.0	5.0	8.0
	83	6365	8.0	8.0	5.0	5.0	8.0
	91	6405	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	7	5985	10.5	10.5	7.5	7.5	10.5
	23	6065	10.5	10.5	7.5	7.5	10.5
	39	6145	10.5	10.5	7.5	7.5	10.5
	55	6225	10.5	10.5	7.5	7.5	10.5
	71	6305	10.5	10.5	7.5	7.5	10.5
	87	6385	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	15	6025	13.5	13.5	10.5	10.5	13.5
	47	6185	13.5	13.5	10.5	10.5	13.5
	79	6345	13.5	13.5	10.5	10.5	13.5

WLAN Tune-up Power (Laptop Full)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	97	6435	5.0	5.0	2.0	2.0	5.0
	101	6455	5.0	5.0	2.0	2.0	5.0
	105	6475	5.0	5.0	2.0	2.0	5.0
	109	6495	5.0	5.0	2.0	2.0	5.0
	113	6515	5.0	5.0	2.0	2.0	5.0
	117	6535	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	99	6445	8.0	8.0	5.0	5.0	8.0
	107	6485	8.0	8.0	5.0	5.0	8.0
	115	6525	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	103	6465	10.5	10.5	7.5	7.5	10.5
	119	6545	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	111	6505	13.5	13.5	10.5	10.5	13.5

WLAN Tune-up Power (Laptop Full)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	121	6555	5.0	5.0	2.0	2.0	5.0
	125	6575	5.0	5.0	2.0	2.0	5.0
	129	6595	5.0	5.0	2.0	2.0	5.0
	133	6615	5.0	5.0	2.0	2.0	5.0
	137	6635	5.0	5.0	2.0	2.0	5.0
	141	6655	5.0	5.0	2.0	2.0	5.0
	145	6675	5.0	5.0	2.0	2.0	5.0
	149	6695	5.0	5.0	2.0	2.0	5.0
	153	6715	5.0	5.0	2.0	2.0	5.0
	157	6735	5.0	5.0	2.0	2.0	5.0
	161	6755	5.0	5.0	2.0	2.0	5.0
	165	6775	5.0	5.0	2.0	2.0	5.0
	169	6795	5.0	5.0	2.0	2.0	5.0
	173	6815	5.0	5.0	2.0	2.0	5.0
	177	6835	5.0	5.0	2.0	2.0	5.0
	181	6855	5.0	5.0	2.0	2.0	5.0
	185	6875	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	123	6565	8.0	8.0	5.0	5.0	8.0
	131	6605	8.0	8.0	5.0	5.0	8.0
	139	6645	8.0	8.0	5.0	5.0	8.0
	147	6685	8.0	8.0	5.0	5.0	8.0
	155	6725	8.0	8.0	5.0	5.0	8.0
	163	6765	8.0	8.0	5.0	5.0	8.0
	171	6805	8.0	8.0	5.0	5.0	8.0
	179	6845	8.0	8.0	5.0	5.0	8.0
	187	6885	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	135	6625	10.5	10.5	7.5	7.5	10.5
	151	6705	10.5	10.5	7.5	7.5	10.5
	167	6785	10.5	10.5	7.5	7.5	10.5
	183	6865	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	143	6665	13.5	13.5	10.5	10.5	13.5
	175	6825	13.5	13.5	10.5	10.5	13.5

WLAN Tune-up Power (Laptop Full)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	189	6895	5.0	5.0	2.0	2.0	5.0
	193	6915	5.0	5.0	2.0	2.0	5.0
	197	6935	5.0	5.0	2.0	2.0	5.0
	201	6955	5.0	5.0	2.0	2.0	5.0
	205	6975	5.0	5.0	2.0	2.0	5.0
	209	6995	5.0	5.0	2.0	2.0	5.0
	213	7015	5.0	5.0	2.0	2.0	5.0
	217	7035	5.0	5.0	2.0	2.0	5.0
	221	7055	5.0	5.0	2.0	2.0	5.0
	225	7075	5.0	5.0	2.0	2.0	5.0
	229	7095	5.0	5.0	2.0	2.0	5.0
	233	7115	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	195	6925	8.0	8.0	5.0	5.0	8.0
	203	6965	8.0	8.0	5.0	5.0	8.0
	211	7005	8.0	8.0	5.0	5.0	8.0
	219	7045	8.0	8.0	5.0	5.0	8.0
	227	7085	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	199	6945	10.5	10.5	7.5	7.5	10.5
	215	7025	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	207	6985	13.5	13.5	10.5	10.5	13.5

WLAN Tune-up Power (Tablet Full)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	5.0	5.0	2.0	2.0	5.0
	5	5975	5.0	5.0	2.0	2.0	5.0
	9	5995	5.0	5.0	2.0	2.0	5.0
	13	6015	5.0	5.0	2.0	2.0	5.0
	17	6035	5.0	5.0	2.0	2.0	5.0
	21	6055	5.0	5.0	2.0	2.0	5.0
	25	6075	5.0	5.0	2.0	2.0	5.0
	29	6095	5.0	5.0	2.0	2.0	5.0
	33	6115	5.0	5.0	2.0	2.0	5.0
	37	6135	5.0	5.0	2.0	2.0	5.0
	41	6155	5.0	5.0	2.0	2.0	5.0
	45	6175	5.0	5.0	2.0	2.0	5.0
	49	6195	5.0	5.0	2.0	2.0	5.0
	53	6215	5.0	5.0	2.0	2.0	5.0
	57	6235	5.0	5.0	2.0	2.0	5.0
	61	6255	5.0	5.0	2.0	2.0	5.0
	65	6275	5.0	5.0	2.0	2.0	5.0
	69	6295	5.0	5.0	2.0	2.0	5.0
	73	6315	5.0	5.0	2.0	2.0	5.0
	77	6335	5.0	5.0	2.0	2.0	5.0
	81	6355	5.0	5.0	2.0	2.0	5.0
	85	6375	5.0	5.0	2.0	2.0	5.0
	89	6395	5.0	5.0	2.0	2.0	5.0
	93	6415	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	3	5965	8.0	8.0	5.0	5.0	8.0
	11	6005	8.0	8.0	5.0	5.0	8.0
	19	6045	8.0	8.0	5.0	5.0	8.0
	27	6085	8.0	8.0	5.0	5.0	8.0
	35	6125	8.0	8.0	5.0	5.0	8.0
	43	6165	8.0	8.0	5.0	5.0	8.0
	51	6205	8.0	8.0	5.0	5.0	8.0
	59	6245	8.0	8.0	5.0	5.0	8.0
	67	6285	8.0	8.0	5.0	5.0	8.0
	75	6325	8.0	8.0	5.0	5.0	8.0
	83	6365	8.0	8.0	5.0	5.0	8.0
	91	6405	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	7	5985	10.5	10.5	7.5	7.5	10.5
	23	6065	10.5	10.5	7.5	7.5	10.5
	39	6145	10.5	10.5	7.5	7.5	10.5
	55	6225	10.5	10.5	7.5	7.5	10.5
	71	6305	10.5	10.5	7.5	7.5	10.5
	87	6385	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	15	6025	13.5	13.5	10.5	10.5	13.5
	47	6185	13.5	13.5	10.5	10.5	13.5
	79	6345	13.5	13.5	10.5	10.5	13.5

WLAN Tune-up Power (Tablet Full)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	97	6435	5.0	5.0	2.0	2.0	5.0
	101	6455	5.0	5.0	2.0	2.0	5.0
	105	6475	5.0	5.0	2.0	2.0	5.0
	109	6495	5.0	5.0	2.0	2.0	5.0
	113	6515	5.0	5.0	2.0	2.0	5.0
	117	6535	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	99	6445	8.0	8.0	5.0	5.0	8.0
	107	6485	8.0	8.0	5.0	5.0	8.0
	115	6525	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	103	6465	10.5	10.5	7.5	7.5	10.5
	119	6545	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	111	6505	13.5	13.5	10.5	10.5	13.5

WLAN Tune-up Power (Tablet Full)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	121	6555	5.0	5.0	2.0	2.0	5.0
	125	6575	5.0	5.0	2.0	2.0	5.0
	129	6595	5.0	5.0	2.0	2.0	5.0
	133	6615	5.0	5.0	2.0	2.0	5.0
	137	6635	5.0	5.0	2.0	2.0	5.0
	141	6655	5.0	5.0	2.0	2.0	5.0
	145	6675	5.0	5.0	2.0	2.0	5.0
	149	6695	5.0	5.0	2.0	2.0	5.0
	153	6715	5.0	5.0	2.0	2.0	5.0
	157	6735	5.0	5.0	2.0	2.0	5.0
	161	6755	5.0	5.0	2.0	2.0	5.0
	165	6775	5.0	5.0	2.0	2.0	5.0
	169	6795	5.0	5.0	2.0	2.0	5.0
	173	6815	5.0	5.0	2.0	2.0	5.0
	177	6835	5.0	5.0	2.0	2.0	5.0
	181	6855	5.0	5.0	2.0	2.0	5.0
	185	6875	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	123	6565	8.0	8.0	5.0	5.0	8.0
	131	6605	8.0	8.0	5.0	5.0	8.0
	139	6645	8.0	8.0	5.0	5.0	8.0
	147	6685	8.0	8.0	5.0	5.0	8.0
	155	6725	8.0	8.0	5.0	5.0	8.0
	163	6765	8.0	8.0	5.0	5.0	8.0
	171	6805	8.0	8.0	5.0	5.0	8.0
	179	6845	8.0	8.0	5.0	5.0	8.0
	187	6885	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	135	6625	10.5	10.5	7.5	7.5	10.5
	151	6705	10.5	10.5	7.5	7.5	10.5
	167	6785	10.5	10.5	7.5	7.5	10.5
	183	6865	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	143	6665	13.0	13.0	10.0	10.0	13.0
	175	6825	13.0	13.0	10.0	10.0	13.0

WLAN Tune-up Power (Tablet Full)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	189	6895	5.0	5.0	2.0	2.0	5.0
	193	6915	5.0	5.0	2.0	2.0	5.0
	197	6935	5.0	5.0	2.0	2.0	5.0
	201	6955	5.0	5.0	2.0	2.0	5.0
	205	6975	5.0	5.0	2.0	2.0	5.0
	209	6995	5.0	5.0	2.0	2.0	5.0
	213	7015	5.0	5.0	2.0	2.0	5.0
	217	7035	5.0	5.0	2.0	2.0	5.0
	221	7055	5.0	5.0	2.0	2.0	5.0
	225	7075	5.0	5.0	2.0	2.0	5.0
	229	7095	5.0	5.0	2.0	2.0	5.0
	233	7115	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	195	6925	8.0	8.0	5.0	5.0	8.0
	203	6965	8.0	8.0	5.0	5.0	8.0
	211	7005	8.0	8.0	5.0	5.0	8.0
	219	7045	8.0	8.0	5.0	5.0	8.0
	227	7085	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	199	6945	10.5	10.5	7.5	7.5	10.5
	215	7025	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	207	6985	12.5	12.5	9.5	9.5	12.5

WLAN Tune-up Power (Laptop Reduction)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	5.0	5.0	2.0	2.0	5.0
	5	5975	5.0	5.0	2.0	2.0	5.0
	9	5995	5.0	5.0	2.0	2.0	5.0
	13	6015	5.0	5.0	2.0	2.0	5.0
	17	6035	5.0	5.0	2.0	2.0	5.0
	21	6055	5.0	5.0	2.0	2.0	5.0
	25	6075	5.0	5.0	2.0	2.0	5.0
	29	6095	5.0	5.0	2.0	2.0	5.0
	33	6115	5.0	5.0	2.0	2.0	5.0
	37	6135	5.0	5.0	2.0	2.0	5.0
	41	6155	5.0	5.0	2.0	2.0	5.0
	45	6175	5.0	5.0	2.0	2.0	5.0
	49	6195	5.0	5.0	2.0	2.0	5.0
	53	6215	5.0	5.0	2.0	2.0	5.0
	57	6235	5.0	5.0	2.0	2.0	5.0
	61	6255	5.0	5.0	2.0	2.0	5.0
	65	6275	5.0	5.0	2.0	2.0	5.0
	69	6295	5.0	5.0	2.0	2.0	5.0
	73	6315	5.0	5.0	2.0	2.0	5.0
	77	6335	5.0	5.0	2.0	2.0	5.0
	81	6355	5.0	5.0	2.0	2.0	5.0
	85	6375	5.0	5.0	2.0	2.0	5.0
	89	6395	5.0	5.0	2.0	2.0	5.0
	93	6415	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	3	5965	8.0	8.0	5.0	5.0	8.0
	11	6005	8.0	8.0	5.0	5.0	8.0
	19	6045	8.0	8.0	5.0	5.0	8.0
	27	6085	8.0	8.0	5.0	5.0	8.0
	35	6125	8.0	8.0	5.0	5.0	8.0
	43	6165	8.0	8.0	5.0	5.0	8.0
	51	6205	8.0	8.0	5.0	5.0	8.0
	59	6245	8.0	8.0	5.0	5.0	8.0
	67	6285	8.0	8.0	5.0	5.0	8.0
	75	6325	8.0	8.0	5.0	5.0	8.0
	83	6365	8.0	8.0	5.0	5.0	8.0
	91	6405	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	7	5985	10.0	10.0	7.0	7.0	10.0
	23	6065	10.0	10.0	7.0	7.0	10.0
	39	6145	10.0	10.0	7.0	7.0	10.0
	55	6225	10.0	10.0	7.0	7.0	10.0
	71	6305	10.0	10.0	7.0	7.0	10.0
	87	6385	10.0	10.0	7.0	7.0	10.0
802.11ax HE160	15	6025	10.0	10.0	7.0	7.0	10.0
	47	6185	10.0	10.0	7.0	7.0	10.0
	79	6345	10.0	10.0	7.0	7.0	10.0

WLAN Tune-up Power (Laptop Reduction)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	97	6435	5.0	5.0	2.0	2.0	5.0
	101	6455	5.0	5.0	2.0	2.0	5.0
	105	6475	5.0	5.0	2.0	2.0	5.0
	109	6495	5.0	5.0	2.0	2.0	5.0
	113	6515	5.0	5.0	2.0	2.0	5.0
	117	6535	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	99	6445	8.0	8.0	5.0	5.0	8.0
	107	6485	8.0	8.0	5.0	5.0	8.0
	115	6525	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	103	6465	8.5	8.5	5.5	5.5	8.5
	119	6545	8.5	8.5	5.5	5.5	8.5
802.11ax HE160	111	6505	8.5	8.5	5.5	5.5	8.5

WLAN Tune-up Power (Laptop Reduction)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	121	6555	5.0	5.0	2.0	2.0	5.0
	125	6575	5.0	5.0	2.0	2.0	5.0
	129	6595	5.0	5.0	2.0	2.0	5.0
	133	6615	5.0	5.0	2.0	2.0	5.0
	137	6635	5.0	5.0	2.0	2.0	5.0
	141	6655	5.0	5.0	2.0	2.0	5.0
	145	6675	5.0	5.0	2.0	2.0	5.0
	149	6695	5.0	5.0	2.0	2.0	5.0
	153	6715	5.0	5.0	2.0	2.0	5.0
	157	6735	5.0	5.0	2.0	2.0	5.0
	161	6755	5.0	5.0	2.0	2.0	5.0
	165	6775	5.0	5.0	2.0	2.0	5.0
	169	6795	5.0	5.0	2.0	2.0	5.0
	173	6815	5.0	5.0	2.0	2.0	5.0
	177	6835	5.0	5.0	2.0	2.0	5.0
	181	6855	5.0	5.0	2.0	2.0	5.0
	185	6875	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	123	6565	8.0	8.0	5.0	5.0	8.0
	131	6605	8.0	8.0	5.0	5.0	8.0
	139	6645	8.0	8.0	5.0	5.0	8.0
	147	6685	8.0	8.0	5.0	5.0	8.0
	155	6725	8.0	8.0	5.0	5.0	8.0
	163	6765	8.0	8.0	5.0	5.0	8.0
	171	6805	8.0	8.0	5.0	5.0	8.0
	179	6845	8.0	8.0	5.0	5.0	8.0
	187	6885	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	135	6625	8.5	8.5	5.5	5.5	8.5
	151	6705	8.5	8.5	5.5	5.5	8.5
	167	6785	8.5	8.5	5.5	5.5	8.5
	183	6865	8.5	8.5	5.5	5.5	8.5
802.11ax HE160	143	6665	8.5	8.5	5.5	5.5	8.5
	175	6825	8.5	8.5	5.5	5.5	8.5

WLAN Tune-up Power (Laptop Reduction)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	189	6895	5.0	5.0	2.0	2.0	5.0
	193	6915	5.0	5.0	2.0	2.0	5.0
	197	6935	5.0	5.0	2.0	2.0	5.0
	201	6955	5.0	5.0	2.0	2.0	5.0
	205	6975	5.0	5.0	2.0	2.0	5.0
	209	6995	5.0	5.0	2.0	2.0	5.0
	213	7015	5.0	5.0	2.0	2.0	5.0
	217	7035	5.0	5.0	2.0	2.0	5.0
	221	7055	5.0	5.0	2.0	2.0	5.0
	225	7075	5.0	5.0	2.0	2.0	5.0
	229	7095	5.0	5.0	2.0	2.0	5.0
	233	7115	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	195	6925	8.0	8.0	5.0	5.0	8.0
	203	6965	8.0	8.0	5.0	5.0	8.0
	211	7005	8.0	8.0	5.0	5.0	8.0
	219	7045	8.0	8.0	5.0	5.0	8.0
	227	7085	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	199	6945	9.5	9.5	6.5	6.5	9.5
	215	7025	9.5	9.5	6.5	6.5	9.5
802.11ax HE160	207	6985	9.5	9.5	6.5	6.5	9.5

WLAN Tune-up Power (Tablet Reduction)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	5.0	5.0	2.0	2.0	5.0
	5	5975	5.0	5.0	2.0	2.0	5.0
	9	5995	5.0	5.0	2.0	2.0	5.0
	13	6015	5.0	5.0	2.0	2.0	5.0
	17	6035	5.0	5.0	2.0	2.0	5.0
	21	6055	5.0	5.0	2.0	2.0	5.0
	25	6075	5.0	5.0	2.0	2.0	5.0
	29	6095	5.0	5.0	2.0	2.0	5.0
	33	6115	5.0	5.0	2.0	2.0	5.0
	37	6135	5.0	5.0	2.0	2.0	5.0
	41	6155	5.0	5.0	2.0	2.0	5.0
	45	6175	5.0	5.0	2.0	2.0	5.0
	49	6195	5.0	5.0	2.0	2.0	5.0
	53	6215	5.0	5.0	2.0	2.0	5.0
	57	6235	5.0	5.0	2.0	2.0	5.0
	61	6255	5.0	5.0	2.0	2.0	5.0
	65	6275	5.0	5.0	2.0	2.0	5.0
	69	6295	5.0	5.0	2.0	2.0	5.0
	73	6315	5.0	5.0	2.0	2.0	5.0
	77	6335	5.0	5.0	2.0	2.0	5.0
	81	6355	5.0	5.0	2.0	2.0	5.0
	85	6375	5.0	5.0	2.0	2.0	5.0
	89	6395	5.0	5.0	2.0	2.0	5.0
	93	6415	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	3	5965	8.0	8.0	5.0	5.0	8.0
	11	6005	8.0	8.0	5.0	5.0	8.0
	19	6045	8.0	8.0	5.0	5.0	8.0
	27	6085	8.0	8.0	5.0	5.0	8.0
	35	6125	8.0	8.0	5.0	5.0	8.0
	43	6165	8.0	8.0	5.0	5.0	8.0
	51	6205	8.0	8.0	5.0	5.0	8.0
	59	6245	8.0	8.0	5.0	5.0	8.0
	67	6285	8.0	8.0	5.0	5.0	8.0
	75	6325	8.0	8.0	5.0	5.0	8.0
	83	6365	8.0	8.0	5.0	5.0	8.0
	91	6405	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	7	5985	10.5	10.5	7.5	7.5	10.5
	23	6065	10.5	10.5	7.5	7.5	10.5
	39	6145	10.5	10.5	7.5	7.5	10.5
	55	6225	10.5	10.5	7.5	7.5	10.5
	71	6305	10.5	10.5	7.5	7.5	10.5
	87	6385	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	15	6025	12.5	12.5	9.5	9.5	12.5
	47	6185	12.5	12.5	9.5	9.5	12.5
	79	6345	12.5	12.5	9.5	9.5	12.5

WLAN Tune-up Power (Tablet Reduction)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	97	6435	5.0	5.0	2.0	2.0	5.0
	101	6455	5.0	5.0	2.0	2.0	5.0
	105	6475	5.0	5.0	2.0	2.0	5.0
	109	6495	5.0	5.0	2.0	2.0	5.0
	113	6515	5.0	5.0	2.0	2.0	5.0
	117	6535	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	99	6445	8.0	8.0	5.0	5.0	8.0
	107	6485	8.0	8.0	5.0	5.0	8.0
	115	6525	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	103	6465	10.5	10.5	7.5	7.5	10.5
	119	6545	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	111	6505	12.5	12.5	9.5	9.5	12.5

WLAN Tune-up Power (Tablet Reduction)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	121	6555	5.0	5.0	2.0	2.0	5.0
	125	6575	5.0	5.0	2.0	2.0	5.0
	129	6595	5.0	5.0	2.0	2.0	5.0
	133	6615	5.0	5.0	2.0	2.0	5.0
	137	6635	5.0	5.0	2.0	2.0	5.0
	141	6655	5.0	5.0	2.0	2.0	5.0
	145	6675	5.0	5.0	2.0	2.0	5.0
	149	6695	5.0	5.0	2.0	2.0	5.0
	153	6715	5.0	5.0	2.0	2.0	5.0
	157	6735	5.0	5.0	2.0	2.0	5.0
	161	6755	5.0	5.0	2.0	2.0	5.0
	165	6775	5.0	5.0	2.0	2.0	5.0
	169	6795	5.0	5.0	2.0	2.0	5.0
	173	6815	5.0	5.0	2.0	2.0	5.0
	177	6835	5.0	5.0	2.0	2.0	5.0
	181	6855	5.0	5.0	2.0	2.0	5.0
	185	6875	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	123	6565	8.0	8.0	5.0	5.0	8.0
	131	6605	8.0	8.0	5.0	5.0	8.0
	139	6645	8.0	8.0	5.0	5.0	8.0
	147	6685	8.0	8.0	5.0	5.0	8.0
	155	6725	8.0	8.0	5.0	5.0	8.0
	163	6765	8.0	8.0	5.0	5.0	8.0
	171	6805	8.0	8.0	5.0	5.0	8.0
	179	6845	8.0	8.0	5.0	5.0	8.0
	187	6885	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	135	6625	10.5	10.5	7.5	7.5	10.5
	151	6705	10.5	10.5	7.5	7.5	10.5
	167	6785	10.5	10.5	7.5	7.5	10.5
	183	6865	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	143	6665	12.0	12.0	9.0	9.0	12.0
	175	6825	12.0	12.0	9.0	9.0	12.0

WLAN Tune-up Power (Tablet Reduction)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	189	6895	5.0	5.0	2.0	2.0	5.0
	193	6915	5.0	5.0	2.0	2.0	5.0
	197	6935	5.0	5.0	2.0	2.0	5.0
	201	6955	5.0	5.0	2.0	2.0	5.0
	205	6975	5.0	5.0	2.0	2.0	5.0
	209	6995	5.0	5.0	2.0	2.0	5.0
	213	7015	5.0	5.0	2.0	2.0	5.0
	217	7035	5.0	5.0	2.0	2.0	5.0
	221	7055	5.0	5.0	2.0	2.0	5.0
	225	7075	5.0	5.0	2.0	2.0	5.0
	229	7095	5.0	5.0	2.0	2.0	5.0
	233	7115	5.0	5.0	2.0	2.0	5.0
802.11ax HE40	195	6925	8.0	8.0	5.0	5.0	8.0
	203	6965	8.0	8.0	5.0	5.0	8.0
	211	7005	8.0	8.0	5.0	5.0	8.0
	219	7045	8.0	8.0	5.0	5.0	8.0
	227	7085	8.0	8.0	5.0	5.0	8.0
802.11ax HE80	199	6945	10.5	10.5	7.5	7.5	10.5
	215	7025	10.5	10.5	7.5	7.5	10.5
802.11ax HE160	207	6985	11.5	11.5	8.5	8.5	11.5

Annex E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

WLAN Conducted Power (Laptop Mode Full)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	15	6025	13.48
	47	6185	13.47
	79	6345	13.49

UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	111	6505	13.39

UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	143	6665	13.47
	175	6825	13.41

UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	207	6985	13.46

WLAN Conducted Power (Laptop Mode Full)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	15	6025	13.43
	47	6185	13.45
	79	6345	13.48

UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	111	6505	13.44

UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	143	6665	13.44
	175	6825	13.45

UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	207	6985	13.46

WLAN Conducted Power (Laptop Mode Full)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	15	6025	10.43	10.47	13.46
	47	6185	10.48	10.42	13.46
	79	6345	10.45	10.49	13.48

UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	111	6505	10.41	10.47	13.45

UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	143	6665	10.46	10.36	13.42
	175	6825	10.48	10.41	13.46

UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	207	6985	10.49	10.43	13.47

WLAN Conducted Power (Tablet Mode Full)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	15	6025	13.48
	47	6185	13.47
	79	6345	13.49

UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	111	6505	13.39

UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	143	6665	12.88
	175	6825	12.99

UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	207	6985	12.45

WLAN Conducted Power (Tablet Mode Full)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	15	6025	13.43
	47	6185	13.45
	79	6345	13.48

UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	111	6505	13.44

UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	143	6665	12.84
	175	6825	12.87

UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	207	6985	12.44

WLAN Conducted Power (Tablet Mode Full)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	15	6025	10.43	10.47	13.46
	47	6185	10.48	10.42	13.46
	79	6345	10.45	10.49	13.48

UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	111	6505	10.41	10.47	13.45

UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	143	6665	9.95	9.89	12.93
	175	6825	9.99	9.98	13

UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	207	6985	9.49	9.44	12.48

WLAN Conducted Power (Laptop Mode Reduction)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	15	6025	9.81
	47	6185	9.98
	79	6345	9.99

UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	111	6505	8.32

UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	143	6665	8.43
	175	6825	8.48

UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	207	6985	9.49

WLAN Conducted Power (Laptop Mode Reduction)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	15	6025	9.92
	47	6185	9.97
	79	6345	9.98

UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	111	6505	8.44

UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	143	6665	8.47
	175	6825	8.49

UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	207	6985	9.49

WLAN Conducted Power (Laptop Mode Reduction)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	15	6025	6.86	6.88	9.88
	47	6185	6.88	6.91	9.91
	79	6345	6.97	6.95	9.97

UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	111	6505	5.48	5.47	8.49

UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	143	6665	5.46	5.49	8.49
	175	6825	5.49	5.48	8.5

UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	207	6985	6.46	6.44	9.46

WLAN Conducted Power (Tablet Mode Reduction)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	15	6025	12.46
	47	6185	12.41
	79	6345	12.49

UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	111	6505	12.39

UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	143	6665	11.98
	175	6825	11.94

UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE160	207	6985	11.44

WLAN Conducted Power (Tablet Mode Reduction)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	15	6025	12.41
	47	6185	12.43
	79	6345	12.46

UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	111	6505	12.42

UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	143	6665	11.95
	175	6825	11.99

UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE160	207	6985	11.47

WLAN Conducted Power (Tablet Mode Reduction)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	15	6025	9.37	9.49	12.44
	47	6185	9.41	9.47	12.45
	79	6345	9.45	9.48	12.48

UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	111	6505	9.49	9.42	12.47

UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	143	6665	8.92	8.83	11.89
	175	6825	8.91	8.91	11.92

UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE160	207	6985	8.47	8.46	11.48

Annex F. SAR and Power Density Test Result

SAR Results for Body Exposure Condition.

Note:

1. SAR testing for WLAN was performed on the maximum power mode.
2. The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

Tablet SAR and Power Density Test Result																											
System & Position						DUT & Accessory			SAR							Power Density											
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Measured APD W/m ² (4cm ²)	Grid Step [λ]	iPD [W/m2]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm2]	Power Drift [dB]	Normal psPD [W/m2]	Scaled Normal psPD [W/m2]	Total psPD [W/m2]	Scaled Total psPD [W/m2]	
		UNII-5	802.11ax HE160	Rear Face	0	79	1	Ant 0	w/o	98.50	1.02	13.50	13.49	1.00	0.08	0.136	0.14	1.36	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Left Side	0	79	1	Ant 0	w/o	98.50	1.02	13.50	13.49	1.00	-0.06	0.021	0.02	0.27	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Right Side	0	79	1	Ant 0	w/o	98.50	1.02	13.50	13.49	1.00	0	<0.001	0.00	0	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Top Side	2	79	1	Ant 0	w/o	98.50	1.02	13.50	13.49	1.00	0.13	0.138	0.14	1.64	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Bottom Side	0	79	1	Ant 0	w/o	98.50	1.02	13.50	13.49	1.00	0	<0.001	0.00	0	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Rear Face	0	79	1	Ant 1	w/o	96.70	1.03	13.50	13.48	1.00	-0.06	0.089	0.09	1.09	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Left Side	0	79	1	Ant 1	w/o	96.70	1.03	13.50	13.48	1.00	0	<0.001	0.00	0	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Right Side	0	79	1	Ant 1	w/o	96.70	1.03	13.50	13.48	1.00	0	<0.001	0.00	0	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Top Side	2	79	1	Ant 1	w/o	96.70	1.03	13.50	13.48	1.00	-0.03	0.148	0.15	1.7	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Bottom Side	0	79	1	Ant 1	w/o	96.70	1.03	13.50	13.48	1.00	0	<0.001	0.00	0	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Rear Face	0	79	1	Ant 0+1	w/o	98.90	1.01	13.50	13.48	1.00	0.11	0.221	0.22	1.21	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Left Side	0	79	1	Ant 0+1	w/o	98.90	1.01	13.50	13.48	1.00	0	<0.001	0.00	0	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Right Side	0	79	1	Ant 0+1	w/o	98.90	1.01	13.50	13.48	1.00	0	<0.001	0.00	0	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Top Side	2	79	1	Ant 0+1	w/o	98.90	1.01	13.50	13.48	1.00	-0.03	0.178	0.18	1.16	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Bottom Side	0	79	1	Ant 0+1	w/o	98.90	1.01	13.50	13.48	1.00	0	<0.001	0.00	0	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Top Side	0	79	1	Ant 0	w/	98.50	1.02	12.50	12.49	1.00	-0.02	0.236	0.24	1.96	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Top Side	0	79	1	Ant 1	w/	96.70	1.03	12.50	12.46	1.01	0.17	0.191	0.20	1.03	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Top Side	0	79	1	Ant 0+1	w/	98.90	1.01	12.50	12.48	1.00	-0.09	0.224	0.23	1.48	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Top Side	0	15	1	Ant 0	w/	98.50	1.02	12.50	12.46	1.01	-0.06	0.245	0.25	1.72	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Top Side	0	47	1	Ant 0	w/	98.50	1.02	12.50	12.41	1.02	0.15	0.208	0.22	2.26	0.25	-	4.00	-	-	-	-	-	
		UNII-6	802.11ax HE160	Top Side	0	111	1	Ant 0	w/	98.50	1.02	12.50	12.39	1.03	0.05	0.23	0.24	2.61	0.25	-	4.00	-	-	-	-	-	
		UNII-7	802.11ax HE160	Top Side	0	143	1	Ant 0	w/	98.50	1.02	12.00	11.98	1.00	-0.06	0.23	0.23	2.92	0.25	-	4.00	-	-	-	-	-	
		UNII-7	802.11ax HE160	Top Side	0	175	1	Ant 0	w/	98.50	1.02	12.00	11.94	1.01	0.03	0.235	0.24	2.97	0.25	-	4.00	-	-	-	-	-	
		UNII-8	802.11ax HE160	Top Side	0	207	1	Ant 0	w/	98.50	1.02	11.50	11.44	1.01	0.07	0.17	0.18	2.07	0.25	-	4.00	-	-	-	-	-	
1		UNII-5	802.11ax HE160	Top Side	0	15	2	Ant 0	w/	98.50	1.02	12.50	12.46	1.01	0.05	0.709	0.73	6.07	0.25	4.64	1.545	4.00	0.15	1.65	2.6	2.11	3.33
		UNII-5	802.11ax HE160	Top Side	0	15	3	Ant 0	w/	98.50	1.02	12.50	12.46	1.01	-0.17	0.503	0.52	3.51	0.25	-	4.00	-	-	-	-	-	
		UNII-5	802.11ax HE160	Top Side	0	15	4	Ant 0	w/	98.50	1.02	12.50	12.46	1.01	-0.04	0.425	0.44	3.07	0.25	-	4.00	-	-	-	-	-	
																			-				-	-	-	-	

Laptop SAR and Power Density Test Result																										
System & Position						DUT & Accessory			SAR								Power Density									
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	P-Sensor	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Measured APD W/m² (4cm²)	Grid Step [λ]	iPD [W/m2]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm2]	Power Drift [dB]	Normal psPD [W/m2]	Scaled Normal psPD [W/m2]	Total psPD [W/m2]	Scaled Total psPD [W/m2]
	UNII-5	802.11ax HE160	Bottom	0	79	1	Ant 0	w/	98.50	1.02	10.00	9.99	1.00	-0.08	0.368	0.38	2.78	0.25		-	4.00		-		-	
	UNII-5	802.11ax HE160	Bottom	0	79	1	Ant 1	w/	96.70	1.03	10.00	9.98	1.00	0.05	0.395	0.41	2.65	0.25		-	4.00		-		-	
	UNII-5	802.11ax HE160	Bottom	0	79	1	Ant 0+1	w/	98.90	1.01	10.00	9.97	1.01	0.14	0.216	0.22	1.55	0.25		-	4.00		-		-	
	UNII-5	802.11ax HE160	Bottom	0	15	1	Ant 1	w/	96.70	1.03	10.00	9.92	1.02	0.03	0.317	0.33	1.95	0.25		-	4.00		-		-	
	UNII-5	802.11ax HE160	Bottom	0	47	1	Ant 1	w/	96.70	1.03	10.00	9.97	1.01	-0.12	0.398	0.41	2.65	0.25		-	4.00		-		-	
	UNII-6	802.11ax HE160	Bottom	0	111	1	Ant 1	w/	96.70	1.03	8.50	8.44	1.01	0.05	0.25	0.26	1.65	0.25		-	4.00		-		-	
	UNII-7	802.11ax HE160	Bottom	0	143	1	Ant 1	w/	96.70	1.03	8.50	8.47	1.01	0.07	0.238	0.25	1.56	0.25		-	4.00		-		-	
	UNII-7	802.11ax HE160	Bottom	0	175	1	Ant 1	w/	96.70	1.03	8.50	8.49	1.00	0.09	0.214	0.22	1.14	0.25		-	4.00		-		-	
	UNII-8	802.11ax HE160	Bottom	0	207	1	Ant 1	w/	96.70	1.03	9.50	9.49	1.00	-0.11	0.162	0.17	1.08	0.25		-	4.00		-		-	
2	UNII-5	802.11ax HE160	Bottom	0	79	2	Ant 1	w/	96.70	1.03	10.00	9.98	1.00	-0.07	0.405	0.42	3.15	0.25	6.77	1.545	4.00	-0.18	2.33	3.71	2.54	4.04
	UNII-5	802.11ax HE160	Bottom	0	79	3	Ant 1	w/	96.70	1.03	10.00	9.98	1.00	0.02	0.357	0.37	2.27	0.25		-	4.00		-		-	
	UNII-5	802.11ax HE160	Bottom	0	79	4	Ant 1	w/	96.70	1.03	10.00	9.98	1.00	-0.14	0.323	0.33	2.08	0.25		-	4.00		-		-	

Annex G. SAR Measurement Variability

Since all the measured SAR_{1g} are less than 0.8 W/kg, the repeated measurement is not required.

Annex H. Analysis of Simultaneous Transmission SAR

The analysis of simultaneous transmission SAR are shown as below.

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
A	WWAN+WIFI6E_Ant0	Yes
B	WWAN+WIFI6E_Ant1	Yes
C	WWAN+WIFI6E_Ant0+1	Yes
D	WWAN+WIFI6E_Ant0 + BT_Ant1	Yes
E	WWAN+WIFI6E_Ant0+1 + BT_Ant1	Yes

Notes

1. The WLAN 2.4G and WLAN 5G cannot transmit simultaneously.
2. Simultaneous TX Combination A can be covered by D
3. Simultaneous TX Combination C can be covered by E

Simultaneous Transmission SAR Evaluation (Tablet)									
Band	Position	1	2	3	4	5	B (1+3)	D (1+2+5)	E (1+4+5)
		Max WWAN	WIFI6E Ant 0	WIFI6E Ant 1	WIFI6E Ant 0+1	BT Ant 1	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg			
WCDMA II	Rear Face	0.75	0.14	0.09	0.22	0.00	0.84	0.89	0.97
	Left Side	0.07	0.02	0.00	0.00	0.00	0.07	0.09	0.07
	Right Side	0.39	0.00	0.00	0.00	0.00	0.39	0.39	0.39
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.13	0.00	0.00	0.00	0.00	0.13	0.13	0.13
WCDMA IV	Rear Face	0.48	0.14	0.09	0.22	0.00	0.57	0.62	0.70
	Left Side	0.05	0.02	0.00	0.00	0.00	0.05	0.07	0.05
	Right Side	0.33	0.00	0.00	0.00	0.00	0.33	0.33	0.33
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.08	0.00	0.00	0.00	0.00	0.08	0.08	0.08
WCDMA V	Rear Face	0.39	0.14	0.09	0.22	0.00	0.48	0.53	0.61
	Left Side	0.00	0.02	0.00	0.00	0.00	0.00	0.02	0.00
	Right Side	0.03	0.00	0.00	0.00	0.00	0.03	0.03	0.03
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.25	0.00	0.00	0.00	0.00	0.25	0.25	0.25
LTE 2	Rear Face	0.59	0.14	0.09	0.22	0.00	0.68	0.73	0.81
	Left Side	0.12	0.02	0.00	0.00	0.00	0.12	0.14	0.12
	Right Side	0.59	0.00	0.00	0.00	0.00	0.59	0.59	0.59
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.15	0.00	0.00	0.00	0.00	0.15	0.15	0.15
LTE 4	Rear Face	0.54	0.14	0.09	0.22	0.00	0.63	0.68	0.76
	Left Side	0.06	0.02	0.00	0.00	0.00	0.06	0.08	0.06
	Right Side	0.45	0.00	0.00	0.00	0.00	0.45	0.45	0.45
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.10	0.00	0.00	0.00	0.00	0.10	0.10	0.10
LTE 5	Rear Face	0.40	0.14	0.09	0.22	0.00	0.49	0.54	0.62
	Left Side	0.00	0.02	0.00	0.00	0.00	0.00	0.02	0.00
	Right Side	0.03	0.00	0.00	0.00	0.00	0.03	0.03	0.03
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.24	0.00	0.00	0.00	0.00	0.24	0.24	0.24
LTE 7	Rear Face	0.22	0.14	0.09	0.22	0.00	0.31	0.36	0.44
	Left Side	0.03	0.02	0.00	0.00	0.00	0.03	0.05	0.03
	Right Side	0.02	0.00	0.00	0.00	0.00	0.02	0.02	0.02
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.15	0.00	0.00	0.00	0.00	0.15	0.15	0.15
LTE 12	Rear Face	0.35	0.14	0.09	0.22	0.00	0.44	0.49	0.57
	Left Side	0.00	0.02	0.00	0.00	0.00	0.00	0.02	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.18	0.00	0.00	0.00	0.00	0.18	0.18	0.18
LTE 13	Rear Face	0.76	0.14	0.09	0.22	0.00	0.85	0.90	0.98
	Left Side	0.00	0.02	0.00	0.00	0.00	0.00	0.02	0.00
	Right Side	0.09	0.00	0.00	0.00	0.00	0.09	0.09	0.09
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.65	0.00	0.00	0.00	0.00	0.65	0.65	0.65
LTE 14	Rear Face	0.73	0.14	0.09	0.22	0.00	0.82	0.87	0.95
	Left Side	0.00	0.02	0.00	0.00	0.00	0.00	0.02	0.00
	Right Side	0.08	0.00	0.00	0.00	0.00	0.08	0.08	0.08
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.58	0.00	0.00	0.00	0.00	0.58	0.58	0.58
LTE 17	Rear Face	0.47	0.14	0.09	0.22	0.00	0.56	0.61	0.69
	Left Side	0.00	0.02	0.00	0.00	0.00	0.00	0.02	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.29	0.00	0.00	0.00	0.00	0.29	0.29	0.29

Simultaneous Transmission SAR Evaluation (Tablet)									
Band	Position	1	2	3	4	5	B (1+3)	D (1+2+5)	E (1+4+5)
		Max WWAN	WIFI6E Ant 0	WIFI6E Ant 1	WIFI6E Ant 0+1	BT Ant 1	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg			
LTE 25	Rear Face	0.60	0.14	0.09	0.22	0.00	0.69	0.74	0.82
	Left Side	0.06	0.02	0.00	0.00	0.00	0.06	0.08	0.06
	Right Side	0.45	0.00	0.00	0.00	0.00	0.45	0.45	0.45
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.14	0.00	0.00	0.00	0.00	0.14	0.14	0.14
LTE 26	Rear Face	0.79	0.14	0.09	0.22	0.00	0.88	0.93	1.01
	Left Side	0.00	0.02	0.00	0.00	0.00	0.00	0.02	0.00
	Right Side	0.07	0.00	0.00	0.00	0.00	0.07	0.07	0.07
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.55	0.00	0.00	0.00	0.00	0.55	0.55	0.55
LTE 30	Rear Face	0.31	0.14	0.09	0.22	0.00	0.40	0.45	0.53
	Left Side	0.21	0.02	0.00	0.00	0.00	0.21	0.23	0.21
	Right Side	0.10	0.00	0.00	0.00	0.00	0.10	0.10	0.10
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.05	0.00	0.00	0.00	0.00	0.05	0.05	0.05
LTE 38	Rear Face	0.32	0.14	0.09	0.22	0.00	0.41	0.46	0.54
	Left Side	0.01	0.02	0.00	0.00	0.00	0.01	0.03	0.01
	Right Side	0.02	0.00	0.00	0.00	0.00	0.02	0.02	0.02
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.24	0.00	0.00	0.00	0.00	0.24	0.24	0.24
LTE 41	Rear Face	0.16	0.14	0.09	0.22	0.00	0.25	0.30	0.38
	Left Side	0.02	0.02	0.00	0.00	0.00	0.02	0.04	0.02
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.18	0.00	0.00	0.00	0.00	0.18	0.18	0.18
LTE 66	Rear Face	0.40	0.14	0.09	0.22	0.00	0.49	0.54	0.62
	Left Side	0.07	0.02	0.00	0.00	0.00	0.07	0.09	0.07
	Right Side	0.23	0.00	0.00	0.00	0.00	0.23	0.23	0.23
	Top Side	0.00	0.73	0.20	0.23	0.25	0.20	0.98	0.48
	Bottom Side	0.07	0.00	0.00	0.00	0.00	0.07	0.07	0.07

Simultaneous Transmission SAR Evaluation (Laptop)

Band	Position	1	2	3	4	5	B (1+3)	D (1+2+5)	E (1+4+5)
		Max WWAN	WIFI6E Ant 0	WIFI6E Ant 1	WIFI6E Ant 0+1	BT Ant 1	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg			
WCDMA II	Bottom	0.49	0.38	0.42	0.22	0.29	0.91	1.16	1.00
WCDMA IV	Bottom	0.29	0.38	0.42	0.22	0.29	0.71	0.96	0.80
WCDMA V	Bottom	0.59	0.38	0.42	0.22	0.29	1.01	1.26	1.10
LTE 2	Bottom	0.44	0.38	0.42	0.22	0.29	0.86	1.11	0.95
LTE 4	Bottom	0.28	0.38	0.42	0.22	0.29	0.70	0.95	0.79
LTE 5	Bottom	0.53	0.38	0.42	0.22	0.29	0.95	1.20	1.04
LTE 7	Bottom	0.55	0.38	0.42	0.22	0.29	0.97	1.22	1.06
LTE 12	Bottom	0.21	0.38	0.42	0.22	0.29	0.63	0.88	0.72
LTE 13	Bottom	0.47	0.38	0.42	0.22	0.29	0.89	1.14	0.98
LTE 14	Bottom	0.48	0.38	0.42	0.22	0.29	0.90	1.15	0.99
LTE 17	Bottom	0.21	0.38	0.42	0.22	0.29	0.63	0.88	0.72
LTE 25	Bottom	0.39	0.38	0.42	0.22	0.29	0.81	1.06	0.90
LTE 26	Bottom	0.54	0.38	0.42	0.22	0.29	0.96	1.21	1.05
LTE 30	Bottom	0.45	0.38	0.42	0.22	0.29	0.87	1.12	0.96
LTE 38	Bottom	0.19	0.38	0.42	0.22	0.29	0.61	0.86	0.70
LTE 41	Bottom	0.19	0.38	0.42	0.22	0.29	0.61	0.86	0.70
LTE 66	Bottom	0.25	0.38	0.42	0.22	0.29	0.67	0.92	0.76

Annex I. SAR to Peak Location Separation Ratio Analysis.

Since sum of simultaneous transmission SAR is less than the SAR limit for Body : SAR_{1g} 1.6 W/kg. There is no requirement for SAR to Peak Location Separation Ratio Analysis.

Annex J. Calibration of Test Equipment List

Calibration of Test Equipment List are shown as below.

Equipment for SAR Test

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D6.5GHzV2	1029	Feb. 10, 2021	1 Year
System Verification Source	SPEAG	5G Verification Source 10 GHz	1025	Jan. 19, 2021	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7472	Jun. 03, 2021	1 Year
E-Field Probe	SPEAG	EUmmWV4	9438	Jul. 26, 2021	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1277	Jan. 19, 2021	1 Year
Spectrum Analyzer	R&S	FSL6	102006	Apr. 06, 2021	1 Year
Universal Wireless Test Set	Anritsu	MT8870A/MU887000A	6262296569	Aug. 18, 2021	1 Year
Thermometer	YFE	YF-160A	191100743	Apr. 12, 2021	1 Year
Dielectric Assessment Kit	SPEAG	DAKS-3.5	1151	Jul. 14, 2021	1 Year
Powersource1	SPEAG	SE_UMS_160 BA	4010	Jul. 13, 2021	1 Year