



Model: iW24

ALARM SET ☰ ☰

- Press to Preview and Arm/Disarm Alarm
- Press & Hold to Set Alarm
- Use +/- to set hour and press **alarm** to confirm
- Use +/- to set minute and press **alarm** to confirm
- Use +/- to set schedule (7 days, weekdays, weekends) and press **alarm** to confirm (alarm is 7 days until a date is set; See **Date Set** below)
- When alarm sounds, press **alarm** to disable and reset for the next day

SET (=/+)

- Press to increase/decrease settings

SNOOZE/DIMMER ZZZ

- Press to Snooze Alarm
- Press & Hold to Adjust Snooze Duration (adjust 1-29 min with +/- and press Snooze to confirm)
- Press and release to dim display: Auto1, Auto2, Auto3, 2, Lo, and OFF

DATE SET/DST (DAYLIGHT SAVINGS)

- Press & Hold to Set Date
- Use +/- to select year and press **date set** to confirm
- Use +/- to set the month and press **date set** to confirm
- Use +/- to set the day and press **date set** to confirm
- Short press will show DST status on display. Short press toggles Auto/OFF

TIME SET

- Press & Hold to Set Clock
- Use +/- to select 12/24 hour mode and press **time set** to confirm
- Use +/- to set the hour and press **time set** to confirm. PM Indicator will display for PM time. (There is no AM Indicator)
- Use +/- to set the minute and press **time set** to confirm

WIRELESS CHARGING

Supports:

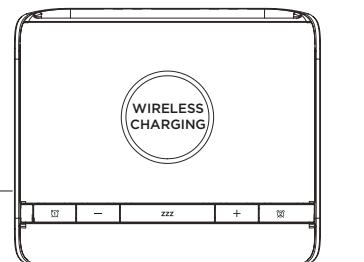
- Qi compatible phones (also works with plastic cases up to 3mm thick)
- AirPods with wireless charging case

Place Qi compatible device face up on the charging rest. Wireless Charging Indicator will show charging status:

- Rapid blinking ⚡ : Device is not charging (reposition device)
- Slow blinking ⚡ : Device is charging
- Solid ⚡ : Device is fully charged

Note: Icon may continue to blink slowly when iOS devices are fully charged.

CAUTION: Remove phone's metal protective case before charging. Do not place magnetic or metal objects on charger during charging. Qi compatible phones with metallic looking finishes will charge normally.

**POWERVALET
2-in-1 Wireless Charger**

LIGHT SENSOR
display will auto-dim to match light environment

WIRELESS CHARGING LED

PM Indicator
Low Backup
Battery Indicator
Wireless Charging
Indicator


1008

Alarm 1 Indicator
Alarm 2 Indicator

**BOTTOM OF UNIT**

Battery Backup Compartment*
(remove pull tab before use)*

*When Low Backup Battery icon appears on the display, install a new CR2450 battery

**REAR CONTROLS**

USB-A Charging (5W) DC Jack (9V/2.5A) Date Set/ Time Set DST

Connect AC adapter to DC Jack, and plug into outlet.

For questions and additional information,
please scan the QR code or visit:

www.ihome.com/help/iw24

**⚠ WARNING:**

- Do not ingest the battery. Chemical Burn Hazard. This product contains a coin/button cell battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- Keep new and used batteries away from children. If the battery compartment does not close securely, stop using the product and seek it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- CAUTION - RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. REPLACE ONLY WITH THE SAME OR EQUIVALENT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

IMPORTANT SAFETY INSTRUCTIONS

- Please heed all warnings, read and follow all instructions and keep these instructions handy for future reference.
1. Do not use this product near water.
 2. Unplug unit and clean only with damp cloth. Stronger cleaning agents, such as Benzene, thinner or similar materials can damage the surface of the unit.
 3. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
 4. Heat - This product should be situated away from heat sources such as radiators, heat registers, stoves or other appliances (including amplifiers) that produce heat.
 5. Only use attachments/accessories specified by the manufacturer.
 6. Unplug this product during lightning storms or when unused for long periods of time.
 7. Damage Requiring Service - This product should be serviced by qualified service personnel when:
 - Plug has been damaged.
 - Objects have fallen into or liquid has been spilled into the enclosure.
 - The unit has been exposed to rain. The unit has been dropped or the enclosure damaged.
 - The unit exhibits a marked change in performance or does not operate normally.
 8. No user serviceable parts, such as light bulb, should be placed on this product.
 9. Attention should be drawn to the environmental aspects of battery disposal. Many electronics retailers now recycle batteries and other electronic components at no charge. To find a drop-off location near you, visit www.call2recycle.com
 10. This product is suitable for use in tropical and/or moderate climates.

WARNING:

- To reduce the risk of fire or electric shock, do not expose this product to rain or moisture.
- Do not dispose of batteries in the household trash or fire.
- The mains plug or power adaptor is used as the disconnect device, it shall remain readily operable.

FCC Information

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device complies with Part 15 of the FCC Rules, operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to other equipment, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment should be installed and operated with minimum distance 20cm (8 inches) between the radiator & your body.

ISED Information

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.

- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

This device complies with ISED RF exposure requirement, users can obtain Canadian information on RF exposure and compliance. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Cet équipement est conforme aux limites d'exposition aux radiations IC CNR-102 établies pour un environnement non contrôlé.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage.

- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. L'appareil est conforme aux exigences d'exposition RF ISED, les utilisateurs peuvent obtenir des informations canadiennes sur l'exposition aux RF et la conformité.

Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

Tout changement ou modification non expressément approuvé par la partie responsable de la conformité peut annuler l'autorité de l'utilisateur à utiliser l'équipement.

CAN ICES-3 (B) / NMB-3(B), CAN RSS-216 / CNR-216

IW24-020822-A

1 YEAR
WARRANTY
© 2022 SDI Technologies, Inc.
All rights reserved

Printed in China