



A Division of Vislink, Inc.

Microwave Radio Communications  
101 Billerica Avenue, Bldg 6  
N. Billerica, MA 01862-1256 USA

August 10, 2011


**Applicant:** Microwave Radio Communication.

101 Billerica Avenue, Building 6  
North Billerica, MA 01862  
Tel. 978-671-5700  
Attn: Sal Blatti, Compliance Manager

**FCC ID:** FC3HDX064D

**Technical Description:**


The HDX1100 FC3HDX064D is a compact, mobile transmitter, designed to be adaptable to a wide range of field applications; particularly those requiring ruggedized, vehicular mounted equipment. The transmitter accepts a wide range of SMPTE based video input signals, including HD-SDI, SDI, ASI, and NTSC. Raw video, audio, and data are delivered to an integral MPEG-2 Encoder which feeds a COFDM-DVB-T modulator, operating in the 2K carrier mode, to produce a 1705 carrier spectrum. The I and Q outputs of the COFDM modulator are supplied directly to an RF generator and up-converted to the operating band from 6425 to 6525 MHz at an RF power level of +14dBm. A 25 dB gain RF amplifier follows the exciter to boost the final RF output power to + 39dBm (8.0 Watt). The exciter RF drive level is factory set to limit the RF output from the PA to 8.0 Watt or less.

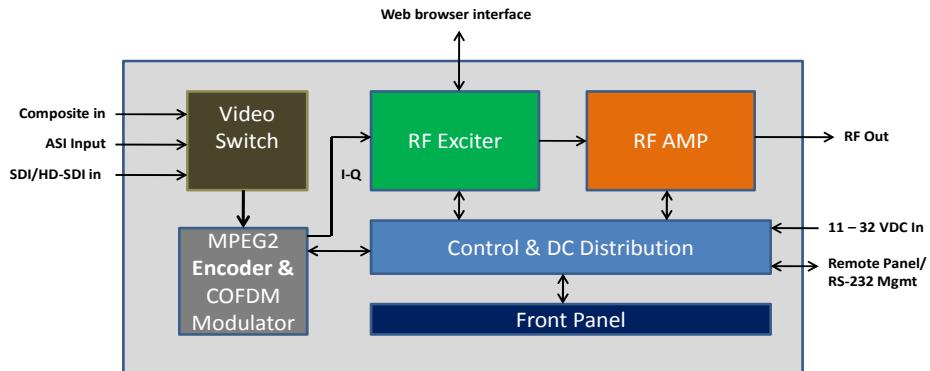

HDX1100 Functional Block Diagram

Figure 1

The specific operating frequency is determined by a high stability wide band VCO. The VCO set-up voltage is controlled by a microprocessor that is factory programmed to provide channel plans in accordance with the rules as specified in §74.602(h)(4)(i)(2)&(3), §78.18(b)(5), and §101.147(j)(2), (3), and (7). :

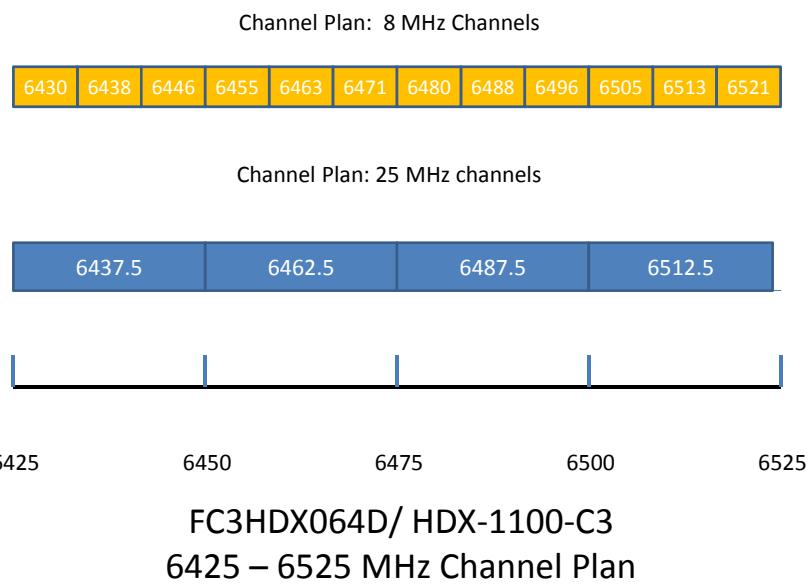

**Table 1 - HDX-1100C3 Factory channel plan center frequencies**

Digital modulation of the COFDM carriers changes between QPSK, 16QAM, and 64QAM as determined by user bit rate requirements. The symbol rate is set to maintain the occupied bandwidth mask to be in compliance with the ETSI EN 300 744 V1.51 standards for either a 6 or 8 MHz COFDM pedestal as shown in the chart above, and to be in compliance with the emission bandwidth limits as required in § 74.637(a)(2)(i), 78.103(e), and 101.111(a)(2)(i).

An LCD touch screen display located on the front panel of the transmitter is used to control basic transmission parameters and provide operational status of internal systems. The transmitter can also be operated from an external remote panel via hard wired RS-232 link.

Additional information may be found in the HDX-1100 User and Technical Manual, included with this application.