

---

REPORT ON  
Radio testing of the VERTEX STANDARD VX-929-G7-5  
In accordance with ANSI/TIA/EIA-603, RSS-119

Report number TA000181

November 2004

## GENERAL INFORMATION

MODEL NAME:	VX-929-G7-5
FCC ID:	K6610334720
IC ID:	511B-10334720
MANUFACTURER:	Vertex Standard Co., Ltd.
TRADE NAME:	VERTEX STANDARD
EUT DESCRIPTION:	VHF FM Transceiver
SERIAL NUMBER:	4M000006
VOLTAGE REQUIREMENTS:	7.4 [V] DC
NUMBER OF CHANNELS:	
SPECIFICATION ARE REFERENCED ANSI/TIA/EIA-603	
	RSS-119

## TRANSMITTERS

TYPE OF EMISSION:	16K0F3E , 11K0F3E
FREQUENCY RANGE:	450 to 512 [MHz]
POWER OUTPUT RATING:	1 to 5 [W]
	<input type="checkbox"/> Switchable
	<input checked="" type="checkbox"/> Variable
	<input type="checkbox"/> N/A
MAXIMUM POWER RATING:	300 [W]
INPUT IMPEDANCE (MIC):	600 [ $\Omega$ ]
OUTPUT IMPEDANCE (RF):	50 [ $\Omega$ ]
Collector Voltage:	7.4 [V]
Collector Current:	1.3 [A]

## RECEIVERS

FREQUENCY RANGE:	450 to 512 [MHz]
INTERMEDIATE FREQUENCIES:	1st -50.85 [MHz]
	2nd -450 [kHz]
INPUT IMPEDANCE (RF):	50 [ $\Omega$ ]
OUTPUT IMPEDANCE (SP):	16 [ $\Omega$ ]
AUDIO OUTPUT POWER:	0.5 [W]

This report was prepared by Vertex Standard Co., Ltd.

Test performed by M.Kurihara

Date 24 / November /2004

## VX-929-G7-5 Channel Settings

CH No.	Shown on LCD	Transmit Frequency [MHz]	Receive Frequency [MHz]	CH Spacing	Power	
					High	Low
1	450.0MHz Wid	450.000	450.000	25k	5W	
2	4810MHz Wid	481.000	481.000	25k	5W	
3	512.0MHz Wid	512.000	512.000	25k	5W	
4	450.0MHz Nar	450.000	450.000	12.5k	5W	
5	481.0MHz Nar	481.000	481.000	12.5k	5W	
6	512.0MHz Nar	512.000	512.000	12.5k	5W	
7	450.0MHz W-L	450.000	450.000	25k		1W
8	481.0MHz W-L	481.000	481.000	25k		1W
9	520.0MHz W-L	512.000	512.000	25k		1W
10	450.0MHz N-L	450.000	450.000	12.5k		1W
11	481.0MHz N-L	481.000	481.000	12.5k		1W
12	512.0MHz N-L	512.000	512.000	12.5k		1W
13	Sub 134.0MHz	450.000	134.000	25k		1W
14	Sub 154.0MHz	481.000	154.000	25k		1W
15	Sub 174.1MHz	512.000	174.000	25k		1W
16						
17						
18						
19						
20						

NAME OF TEST: R.F. Power Output (Conducted)  
SPECIFICATION: 47 CFR 2.1046 (a)  
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.1  
TEST EQUIPMENT: As per attached page

#### MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the modulated output power was measured by means of an R.F. power meter.
2. Measurement accuracy is  $\pm 4\%$

#### MEASUREMENT RESULTS

NOMINAL, MHz	CHANNEL	R.F. POWER, WATTS	
		LOW	HIGH
450.000	1	0.910	4.800
481.000	2	1.110	5.200
512.000	3	0.980	4.780


NAME OF TEST: R.F. Power Output (Radiated)

#### High Power

FREQUENCY TUNED, MHz	LEVEL, dBm
450.0000	37.1
481.0000	37.6
512.0000	35.3

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R.F. POWER OUTPUT  
TEST 2: FREQUENCY STABILITY

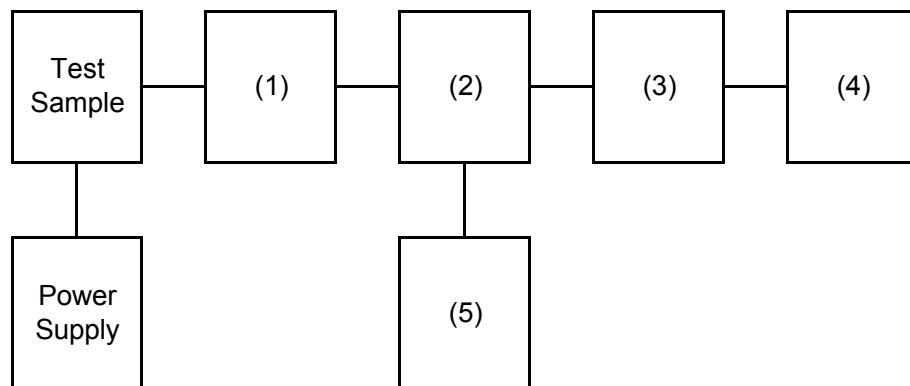

Instruments	Description	Serial Number
(1) COAXIAL ATTENUATOR	WEINSCHELL 49-10-43	***
(2) RF COUPLER	ADVANTEST TR4153	***
(3) POWER SENSOR	Agilent 8482B	***
(4) POWER METER	Agilent 8901B POWER MODE	***
(5) FREQUENCY COUNTER	Agilent 8901B FREQUENCY MODI	***

NAME OF TEST: Unwanted Emissions (Conducted)  
SPECIFICATION: 47 CFR 2.1051  
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.13  
TEST EQUIPMENT: As per attached page


#### MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
  - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS:

FREQUENCY OF CARRIER, MHz = 450 , 481 , 512  
SPECTRUM SEARCHED, GHz = 0 to  $10 \times F_c$   
MAXIMUM RESPONSE, Hz = 2700  
ALL OTHER EMISSIONS =  $\geq 20\text{dB}$  BELOW LIMIT

TRANSMITTER SPURIOUS EMISSION

TEST 1: OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
TEST 2: OUT-OF-BAND SPURIOUS

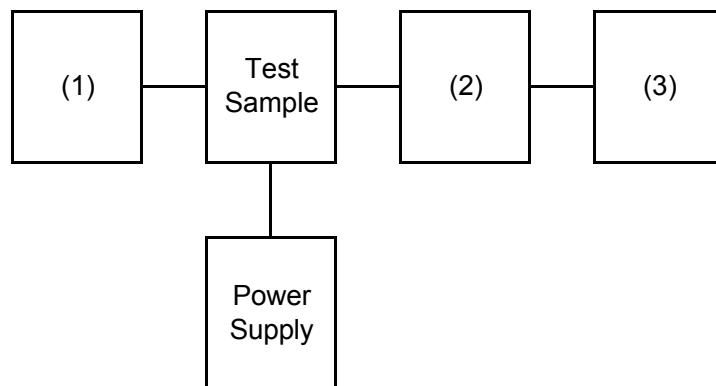

Instruments	Description	Serial Number
(1) AUDIO GENERATOR	Agilent 8903B	***
(2) COAXUAL ATTENUATOR	WEINSCHELL 49-10-43	***
(2) COAXUAL ATTENUATOR	Agilent 8498A	***
(3) SPECTRUM ANALYZER	ADVANTEST TR4173	***

NAME OF TEST: Unwanted Emissions (Conducted)

LIMIT'S), dBc:  $-(50+10x\text{LOG}(P)) = -57$  ( 5 Watts )  
 $-(50+10x\text{LOG}(P)) = -50$  ( 1 Watts )

High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
512.0000	1024.0000	-39.5	-76.5	19.5
481.0000	1924.0000	-36.8	-73.8	16.8

NAME OF TEST: Unwanted Emissions (Conducted)

LIMIT'S), dBc:  $-(50+10x\text{LOG}(P)) = -57$  ( 5 Watts )  
 $-(50+10x\text{LOG}(P)) = -50$  ( 1 Watts )

Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
-------------------------	----------------------------	---------------	---------------	---------------

No emissions were detected at a level greater than 20 dB below the limit.


NAME OF TEST: Field Strength of Spurious Radiation  
SPECIFICATION: 47 CFR 2.1053 (a)  
GUIDE: ANSI/TIA/EIA-603, Paragraph 1.2.12

### MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.1 Method of measurement


- A) Connect the equipment as illustrated.
- B) Adjust the spectrum analyzer for the following settings:
  - 1) Resolution Bandwidth  $\leq 3\text{kHz}$
  - 2) Video Bandwidth  $\geq 10\text{kHz}$
  - 3) Sweep Speed  $\leq 2000\text{Hz/second}$
  - 4) Detector Mode = Positive Peak
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

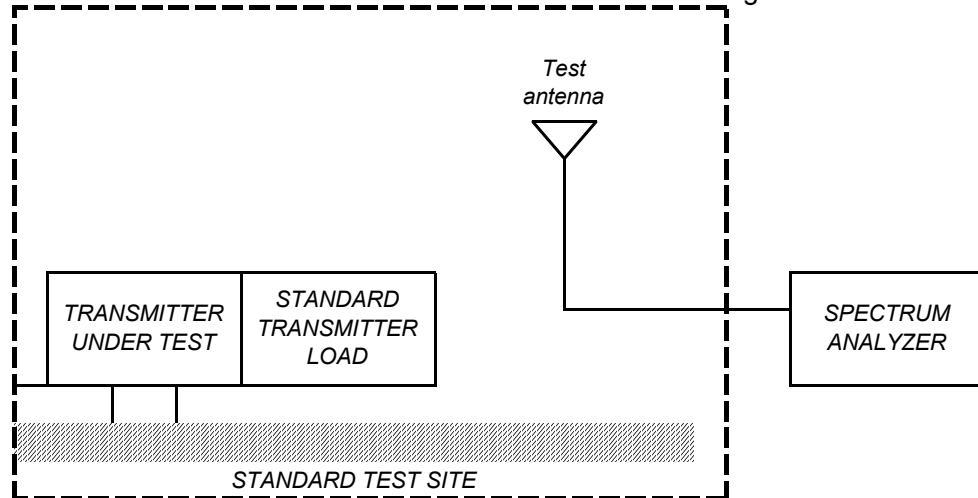

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity.

NAME OF TEST: Field Strength of Spurious Radiation

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically

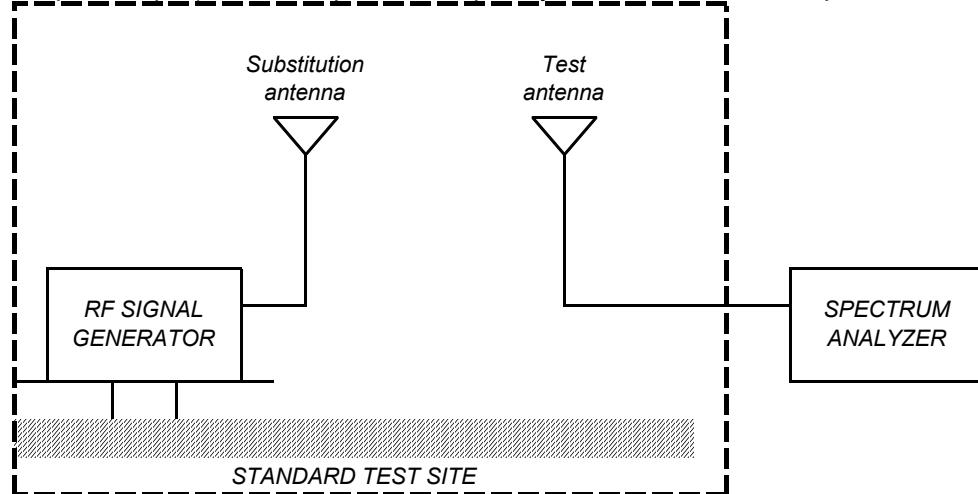

G) Reconnect the equipment as illustrated.

H) Keep the spectrum analyzer adjusted as in step B).

I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved).  
The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3m above the ground.

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previous recorded maximum reading for the set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in step J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =  $10\log(\text{TX power in watts}/0.001)$  - the levels in step L)

NAME OF TEST: Field Strength of Spurious Radiation

Note: It is permissible that other antennas provided can be referenced to a dipole.

Instruments	Description	Serial Number
TRANSDUCER	Schaffner-Chase CBL6143	***
TRANSDUCER	EMCO 3115	***
AMPLIFIER	Agilent 8447D	***
AMPLIFIER	Agilent 8449B	***
SPECTRUM ANALYZER	Agilent 8561B	***

NAME OF TEST: Field Strength of Spurious Radiation

LIMIT'S), dBc:  $-(50+10xLOG(P)) = -57$  ( 5 Watts )  
 $-(50+10xLOG(P)) = -50$  ( 1 Watts )

## High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	C.F., dB	ERP, dBm	ERP, dBc
450.0000	900.0000	37.3	34.3	-35.4	-72.4
481.0000	962.0000	44.7	32.9	-29.4	-66.4
512.0000	1024.0000	81.1	-0.2	-26.1	-63.1
450.0000	1350.0000	62.8	4.2	-40.0	-77.0
481.0000	1443.0000	74.9	4.8	-27.3	-64.3
512.0000	1536.0000	68.1	5.2	-33.7	-70.7
481.0000	1924.0000	66.9	7.5	-32.6	-69.6
512.0000	2560.0000	62.9	10.9	-33.2	-70.2
450.0000	2700.0000	58.9	11.8	-36.3	-73.3

NAME OF TEST: Field Strength of Spurious Radiation

LIMIT'S), dBc:  $-(50+10xLOG(P)) = -57$  ( 5 Watts )  
 $-(50+10xLOG(P)) = -50$  ( 1 Watts )

## Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	C.F., dB	ERP, dBm	ERP, dBc
450.0000	900.0000	42.2	34.3	-30.5	-60.5
481.0000	962.0000	44.0	32.9	-30.1	-60.1
512.0000	1024.0000	76.7	-0.2	-30.5	-60.5
450.0000	1350.0000	74.3	4.2	-28.5	-58.5
450.0000	1443.0000	73.2	4.8	-29.0	-59.0
512.0000	1536.0000	66.6	5.2	-35.2	-65.2
450.0000	1924.0000	61.3	7.5	-38.2	-68.2
450.0000	2700.0000	58.4	11.8	-36.8	-66.8



NAME OF TEST: Emission Masks (Occupied Bandwidth)  
SPECIFICATION: 47 CFR 2.1049 (c) (1)  
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.11  
TEST EQUIPMENT: As per previous page

#### MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the spectrum analyzer connected.
2. For EUT's supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 2.5/\pm 1.5$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16dB.
3. For EUT's supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The occupied bandwidth was measured with the spectrum analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

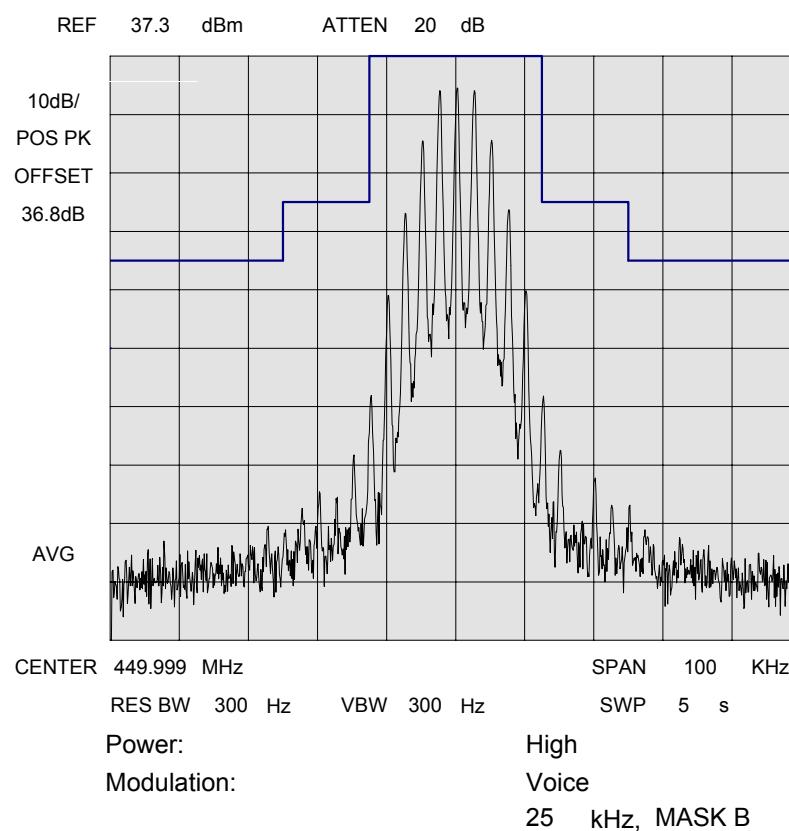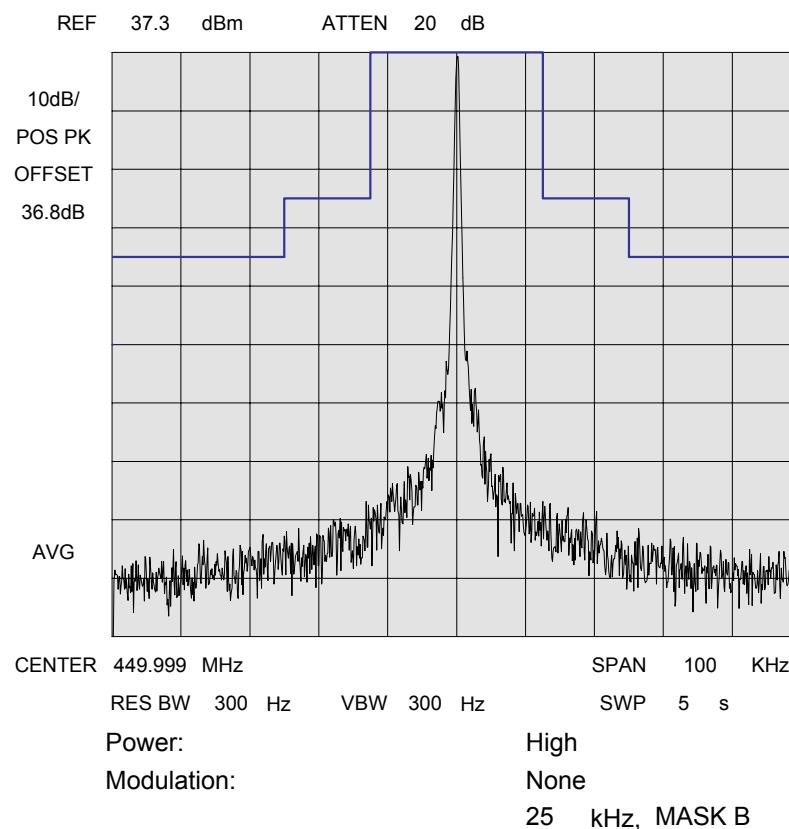



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

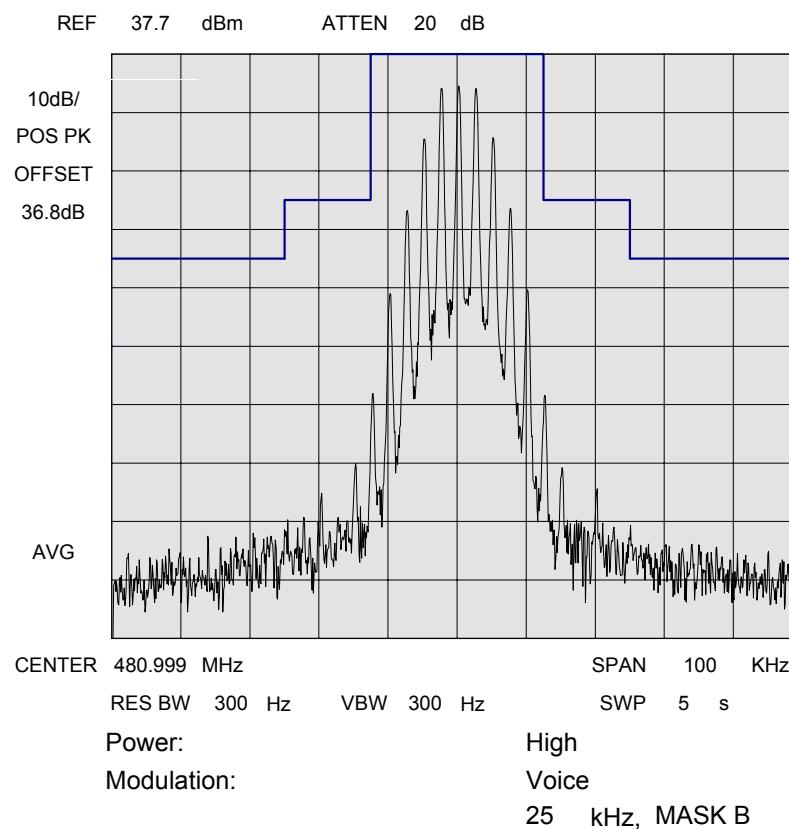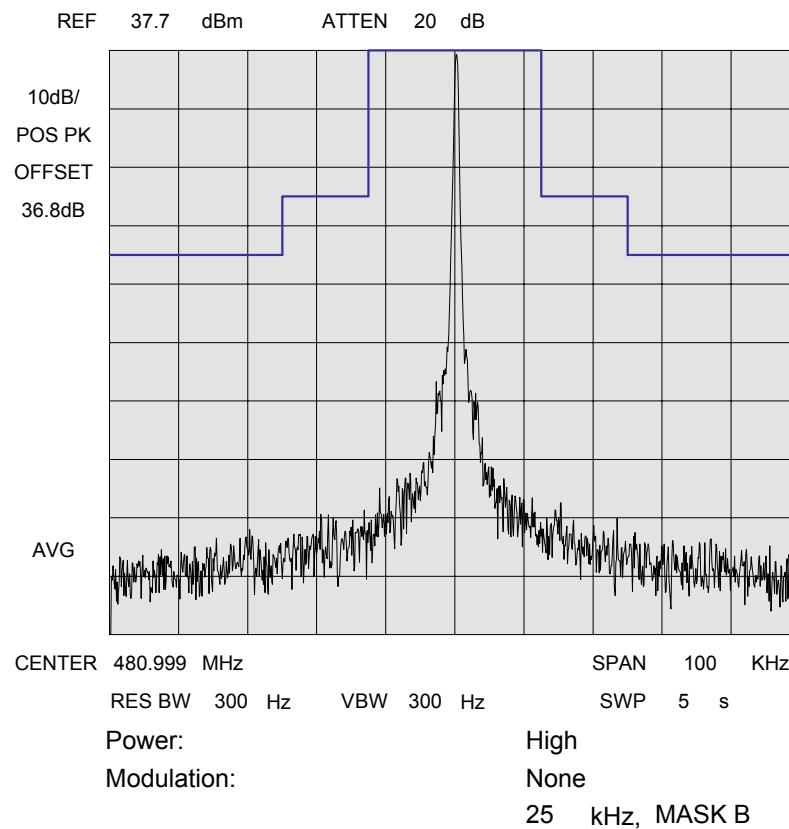



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

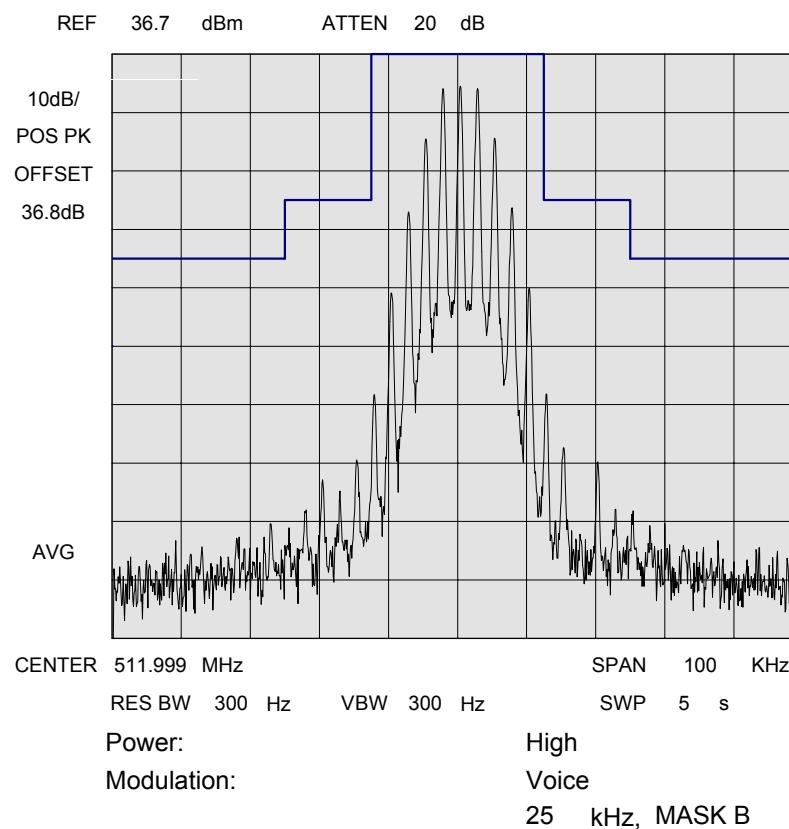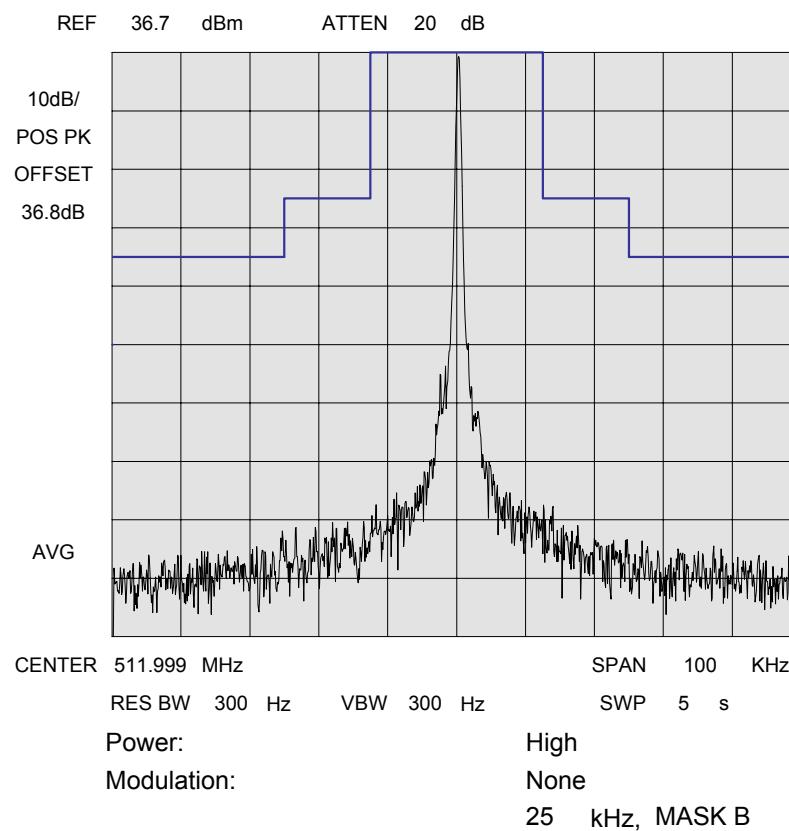



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 2 : Low Power

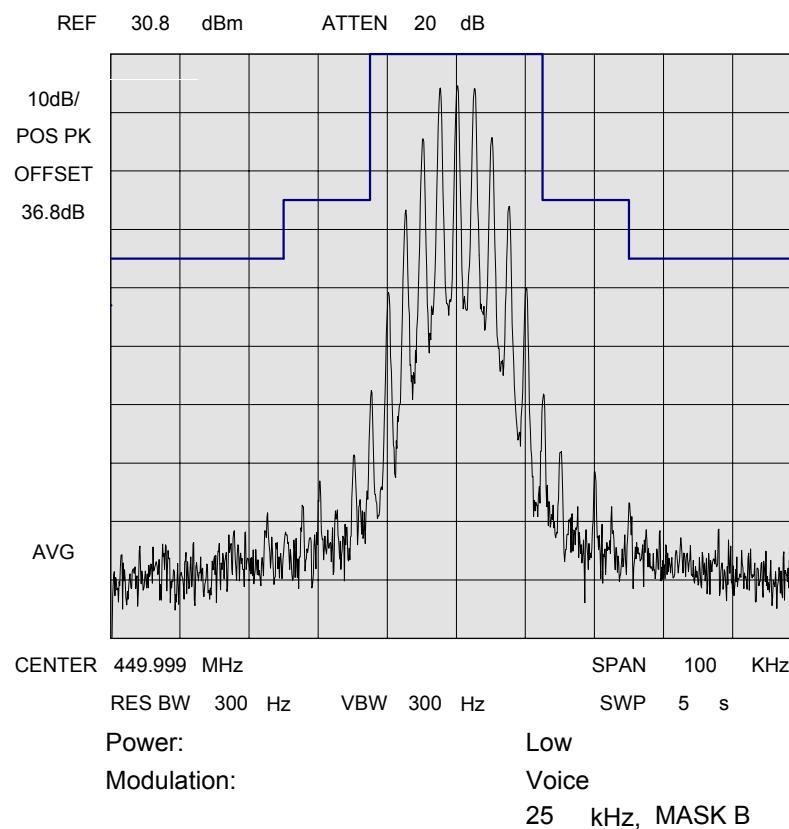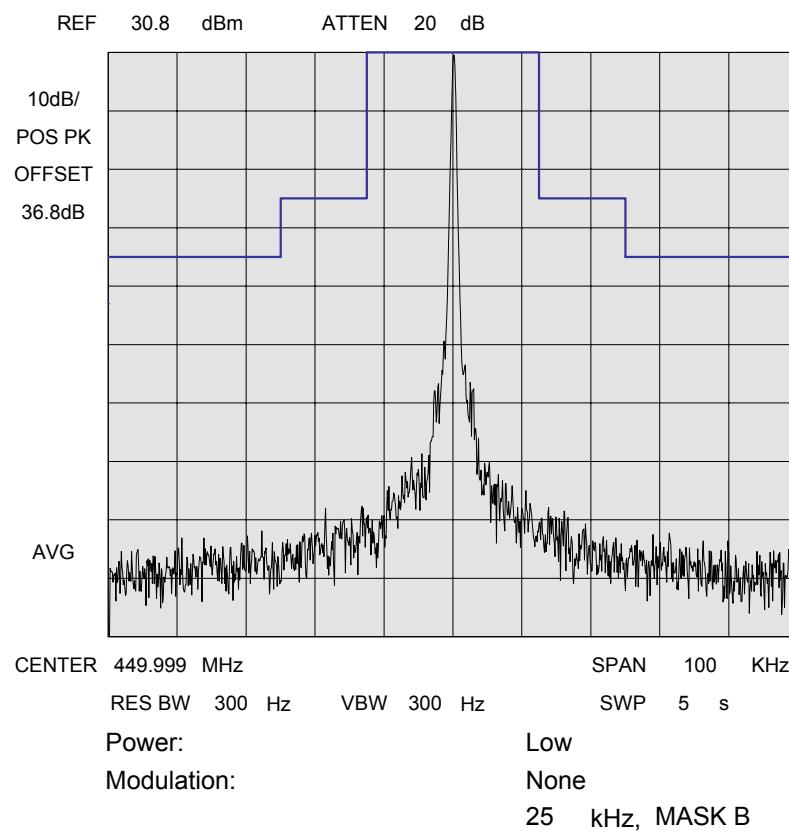



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 2 : Low Power

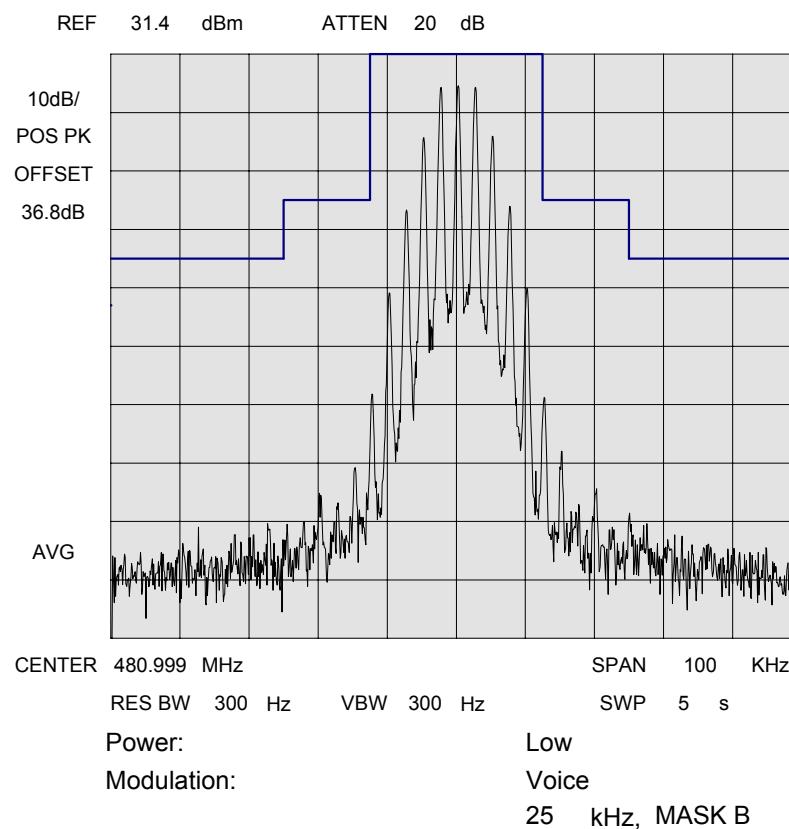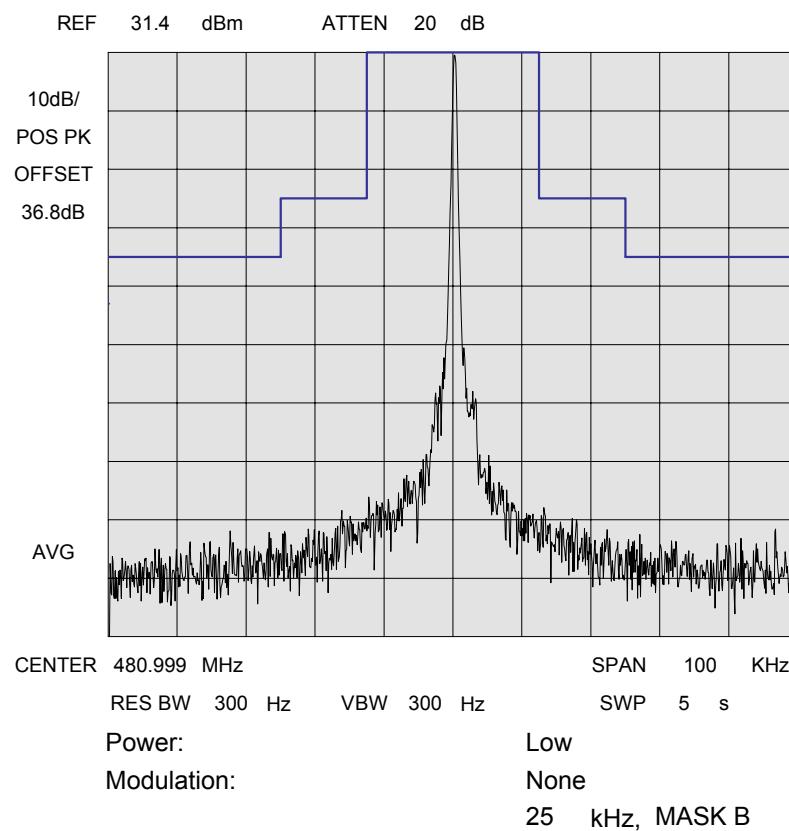



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 2 : Low Power

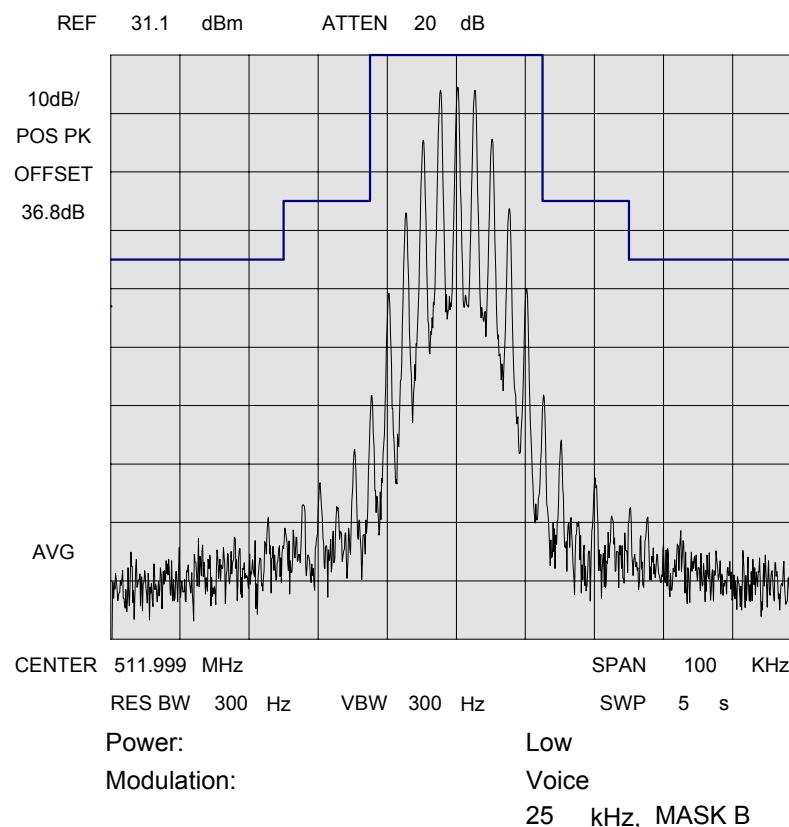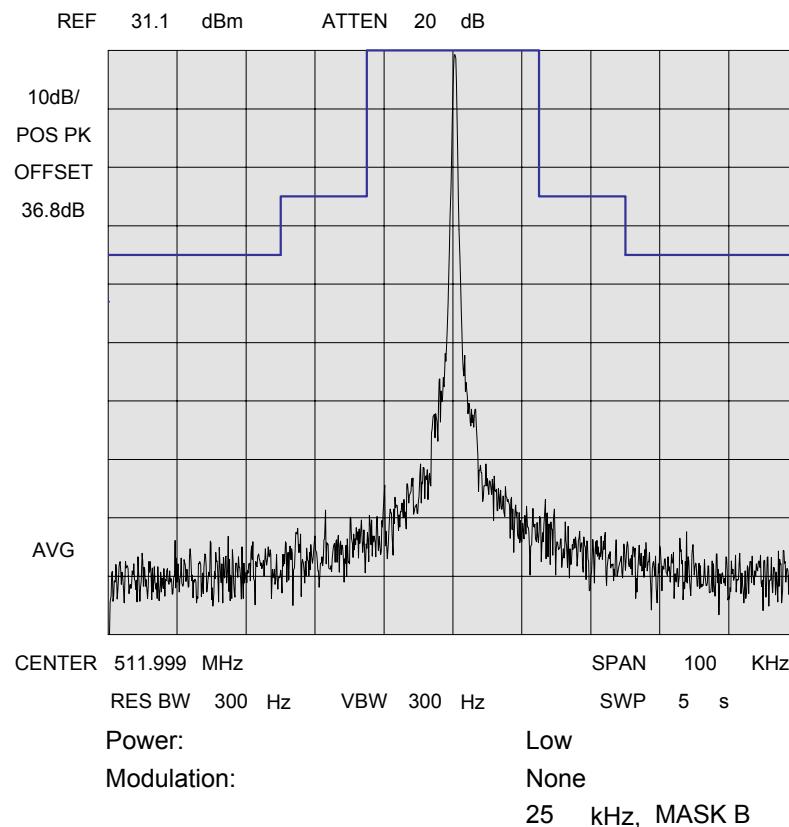



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

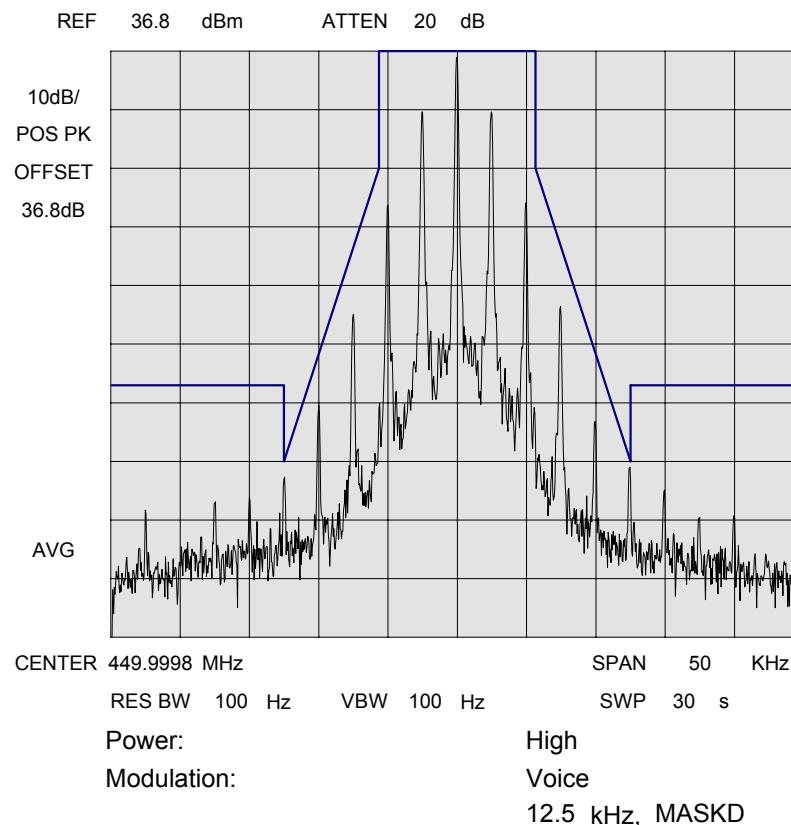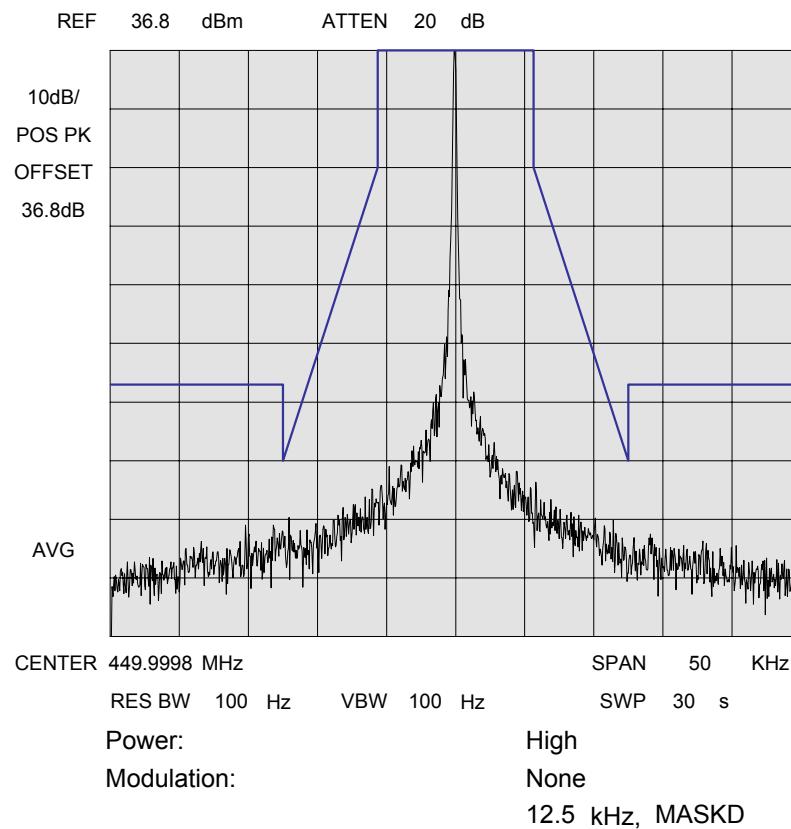



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

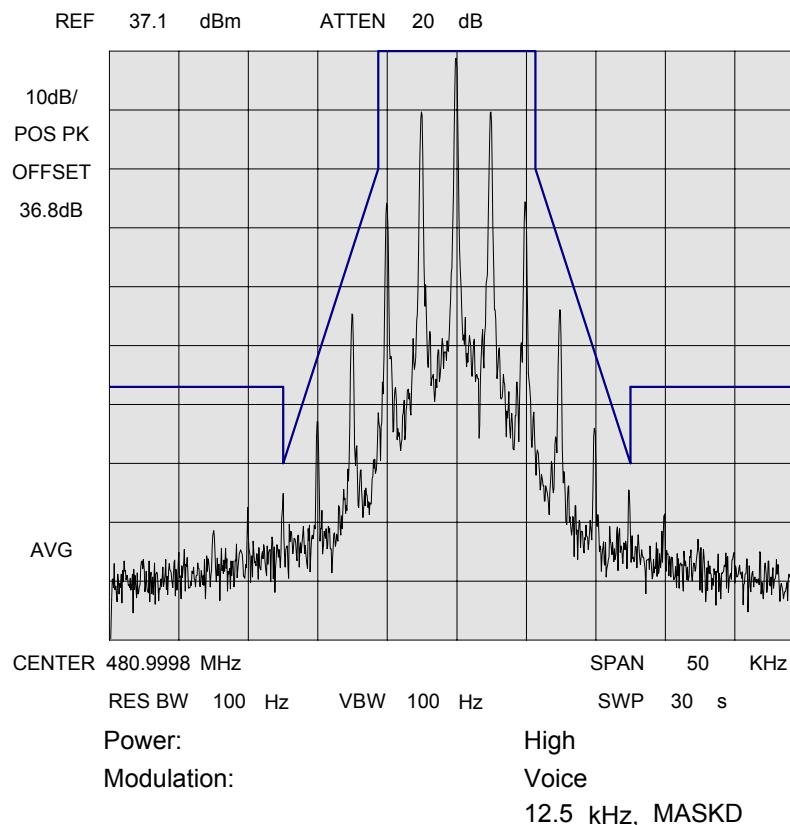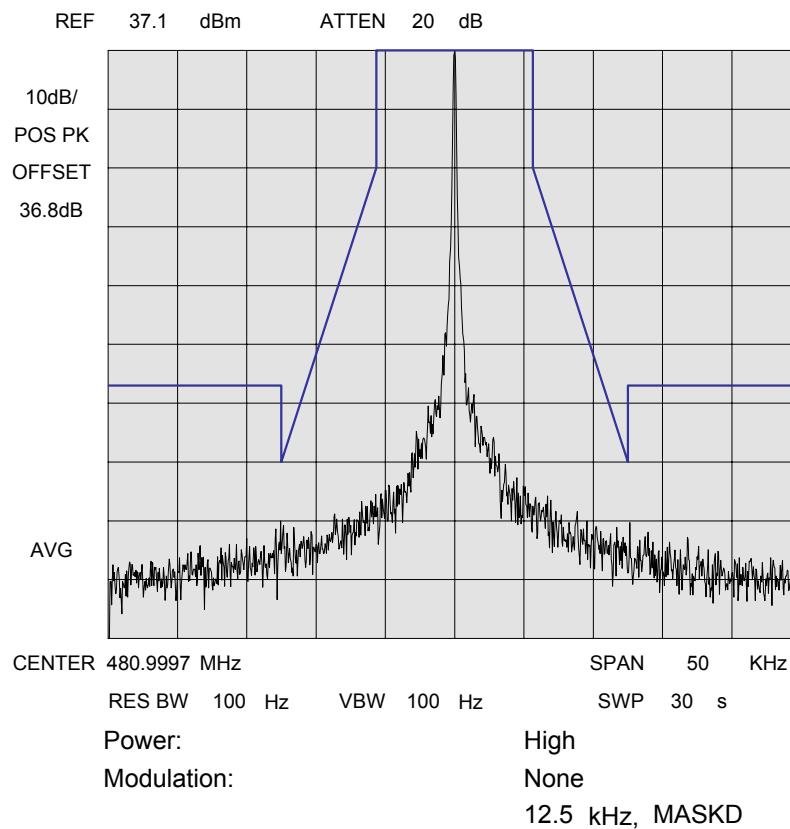



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

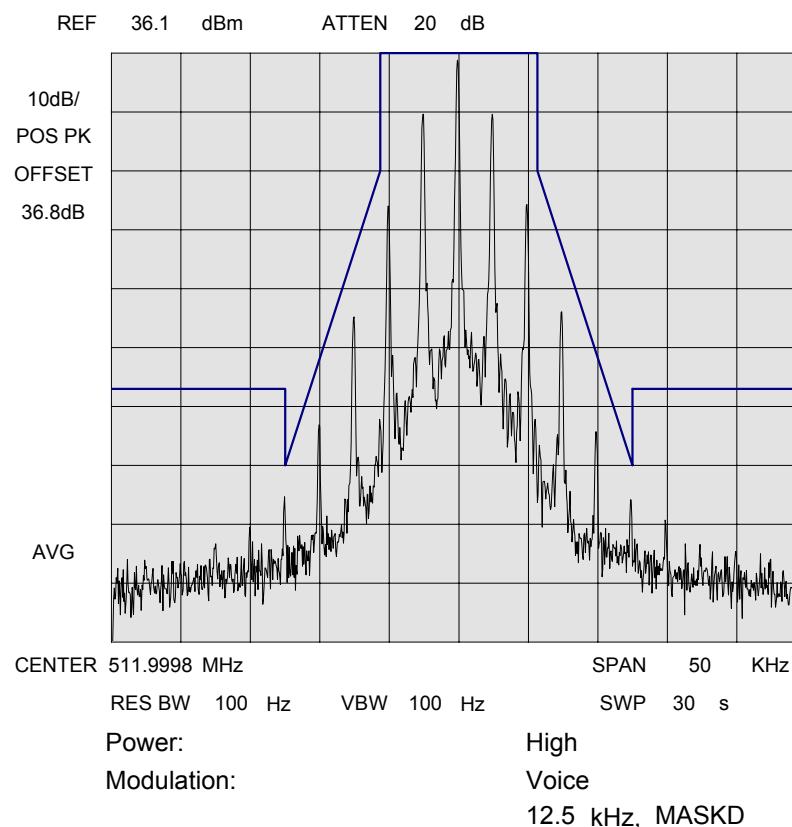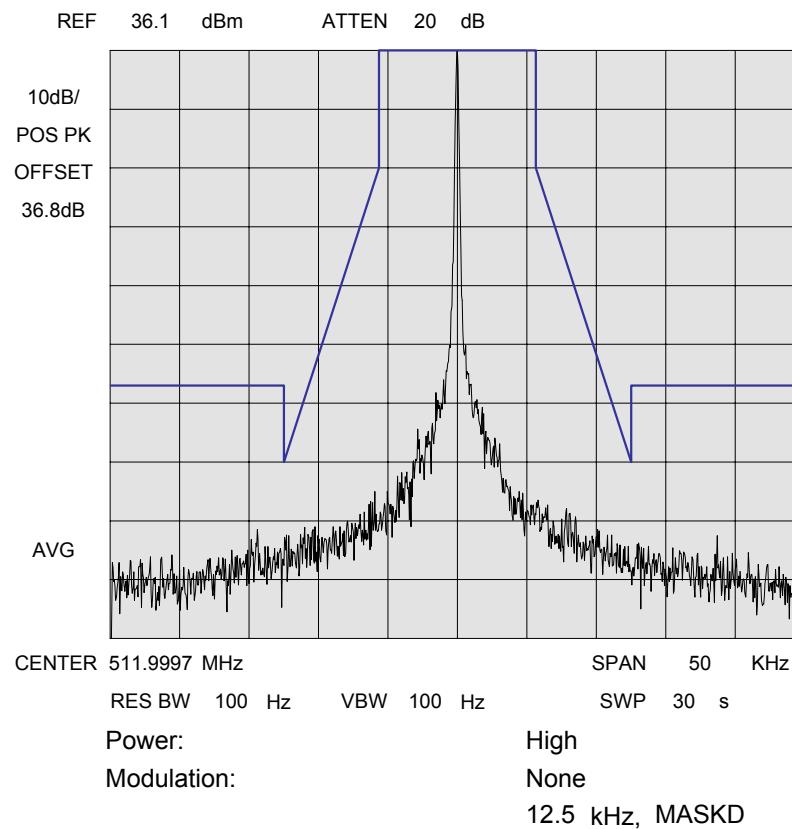



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 2 : Low Power

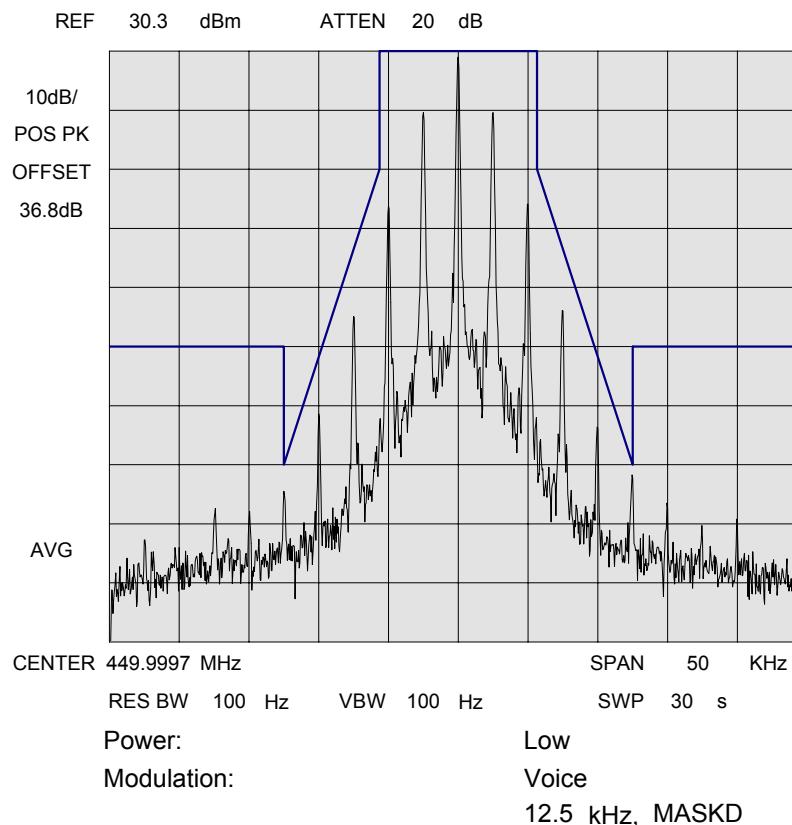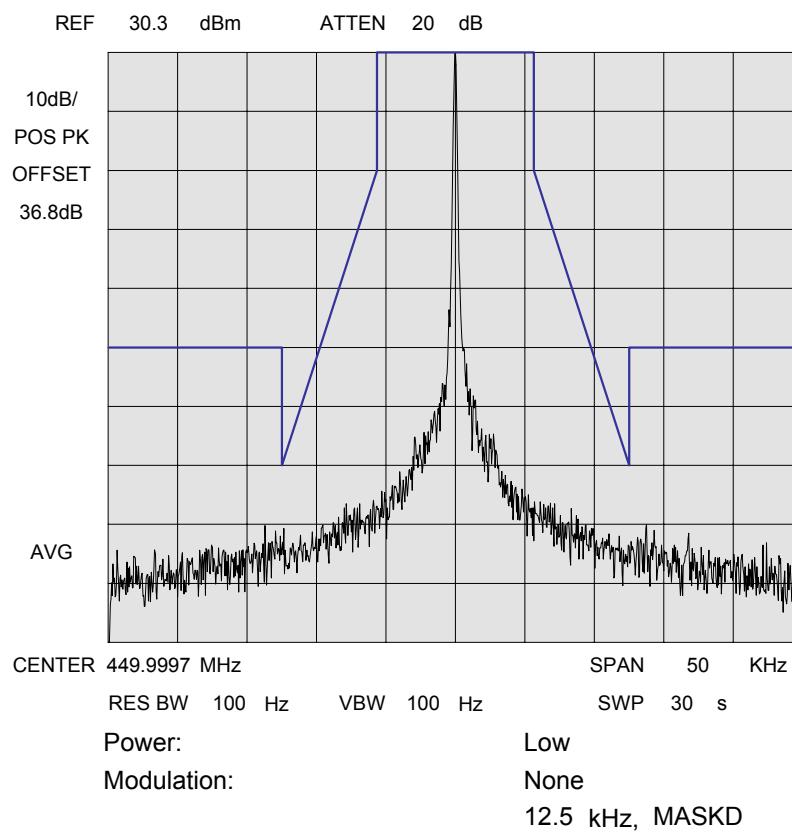



NAME OF TEST: Emission Masks (Occupied Bandwidth)


STATE: 2 : Low Power

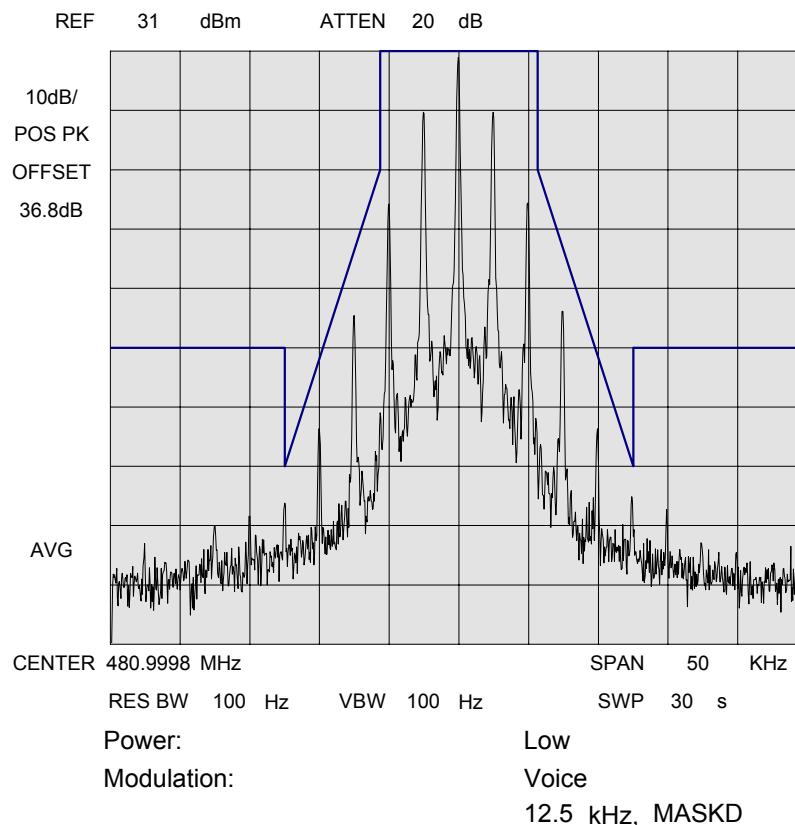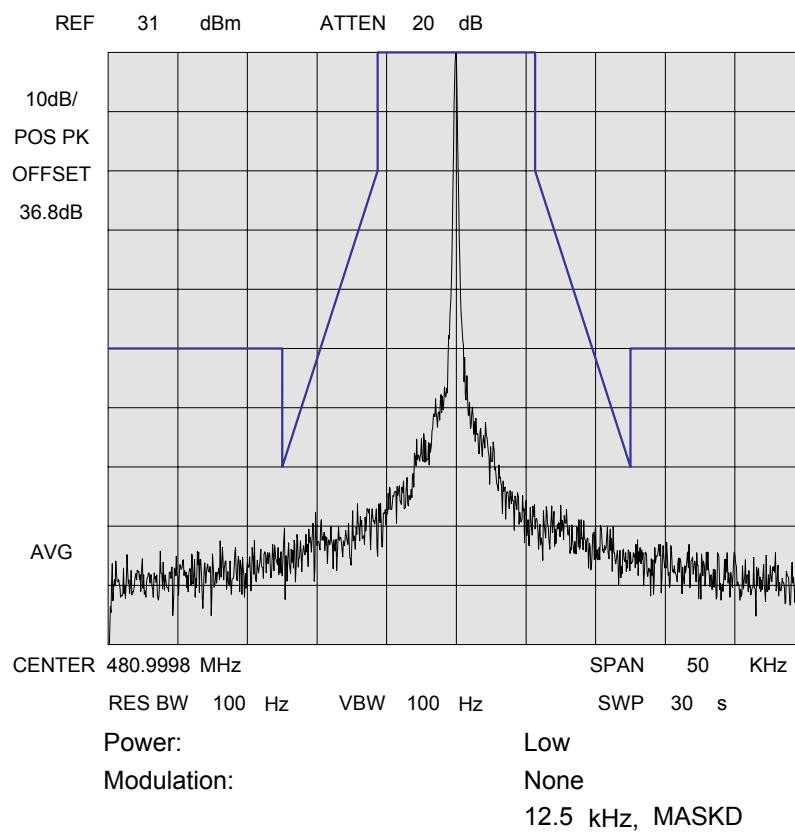

NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 2 : Low Power

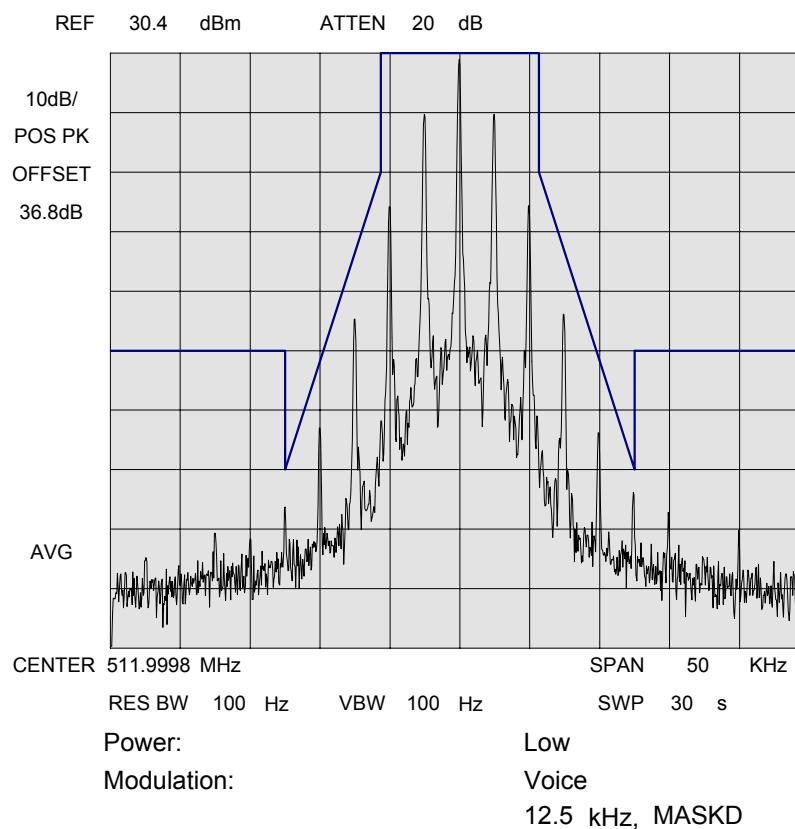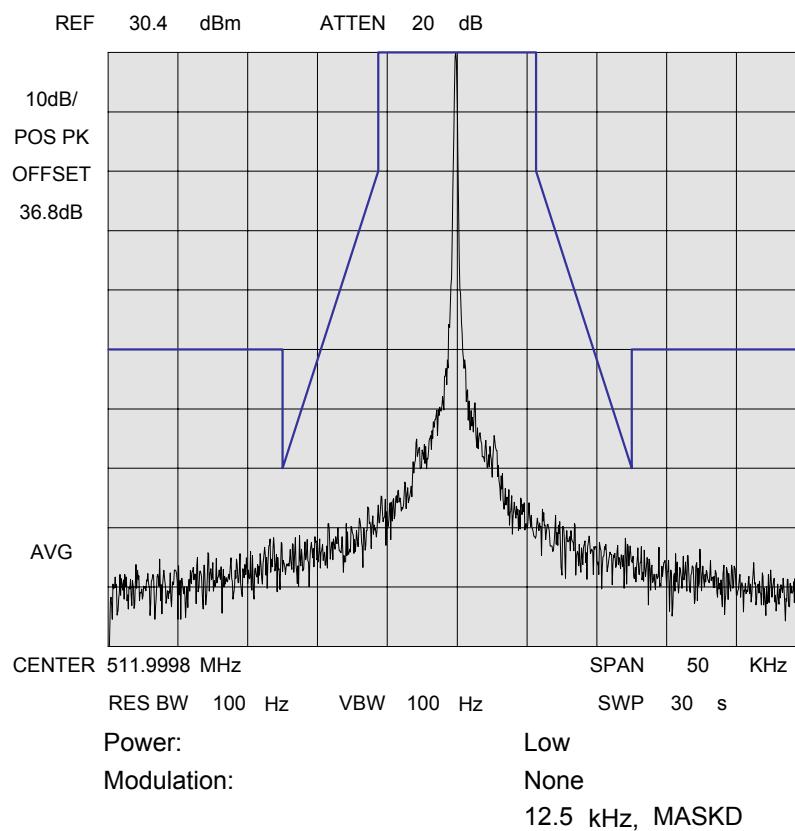


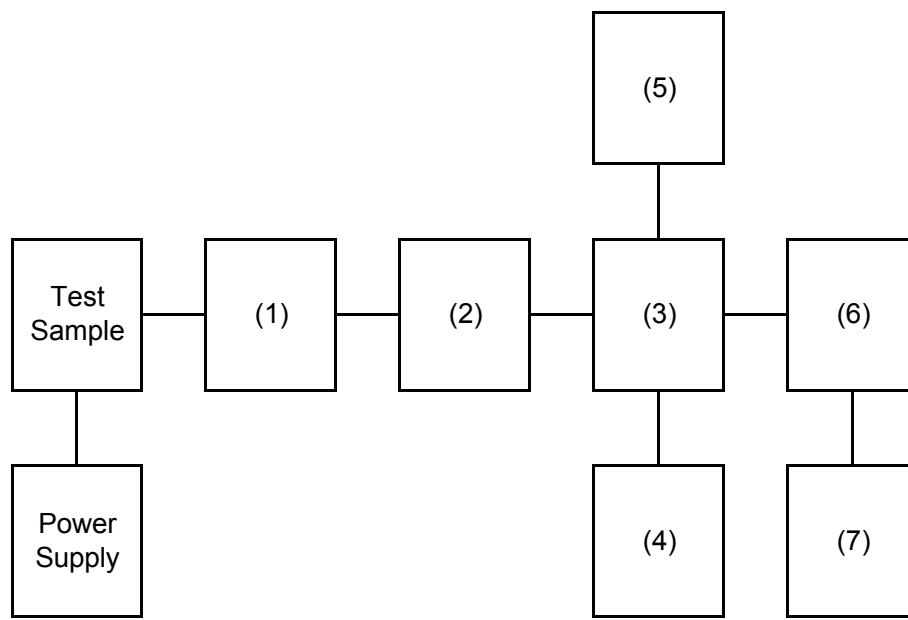TRANSIENT FREQUENCY BEHAVIOR

Instruments	Description	Serial Number
(1) COAXUAL ATTENUATOR	WEINSCHELL 49-10-43	***
(2) COAXUAL ATTENUATOR	WEINSCHELL 49-10-43	***
(3) COMBINER	IWATSU B-504D	***
(4) CRYSTAL DETECTOR	Agilent 8470B	***
(5) RF SIGNAL GENERATOR	Agilent 8642B	***
(5) MODULATION ANALYZER	Agilent 8901B	***
(5) SCOPE	Agilent 54504A	***


## NAME OF TEST: Transient Frequency Behaviour

STATE: 1 : High Power

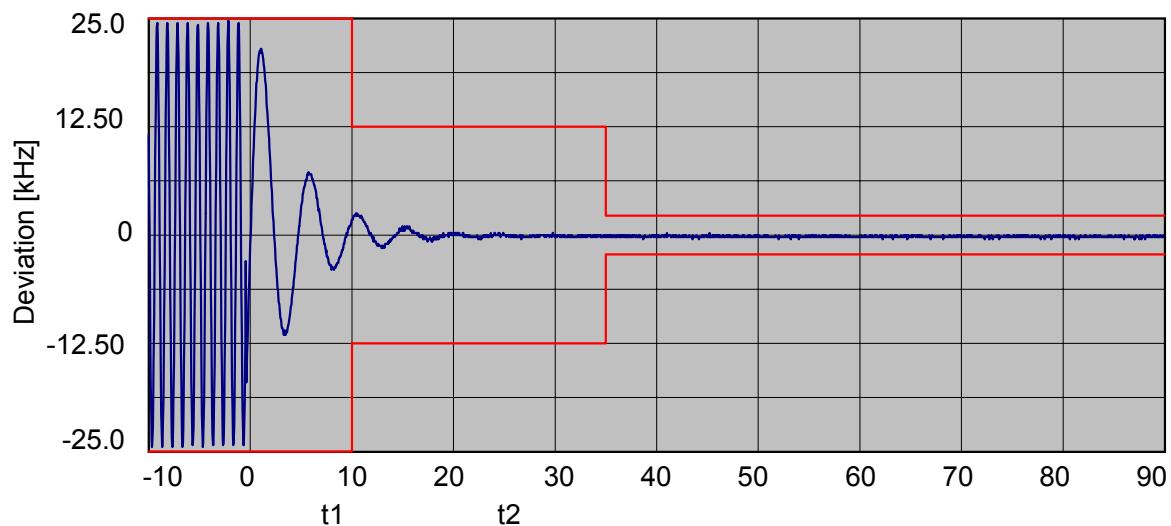

Time [ms]

Model Name:	VX-929-G7-5	Type:	Mobile/Portable
Serial Number:	4M000006	Trigger Direction:	Rise
Test Frequency:	450	Ref. Standard	EIA
Channel Spacing:	25		

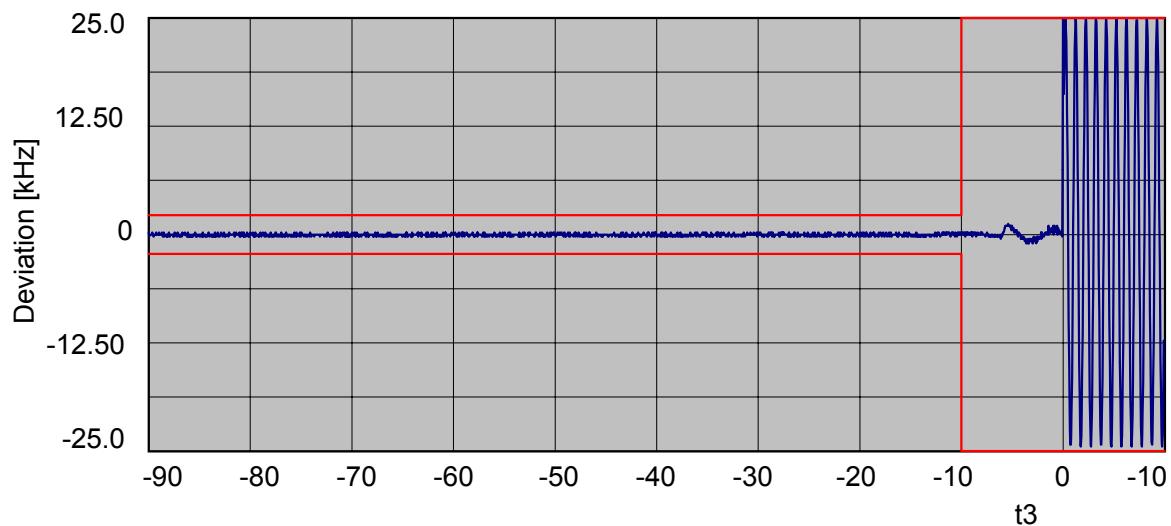


Time [ms]

Model Name:	VX-929-G7-5	Type:	Mobile/Portable
Serial Number:	4M000006	Trigger Direction:	Fall
Test Frequency:	450	Ref. Standard	EIA
Channel Spacing:	25		


NAME OF TEST: Transient Frequency Behaviour

STATE: 1 : High Power

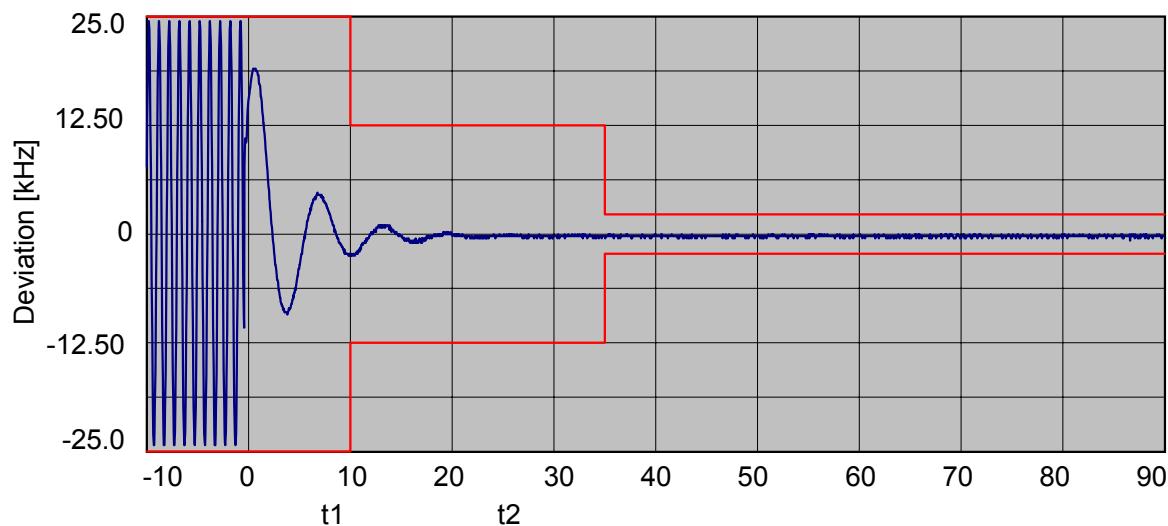

Time [ms]

Model Name:	VX-929-G7-5	Type:	Mobile/Portable
Serial Number:	4M000006	Trigger Direction:	Rise
Test Frequency:	481	Ref. Standard	EIA
Channel Spacing:	25		

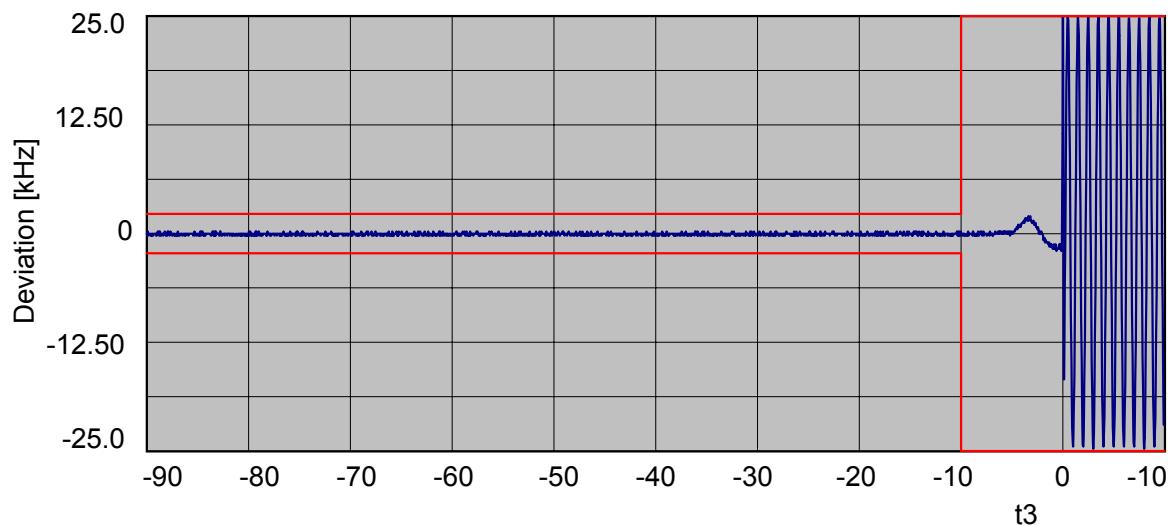


Time [ms]

Model Name:	VX-929-G7-5	Type:	Mobile/Portable
Serial Number:	4M000006	Trigger Direction:	Fall
Test Frequency:	481	Ref. Standard	EIA
Channel Spacing:	25		


NAME OF TEST: Transient Frequency Behaviour

STATE: 1 : High Power

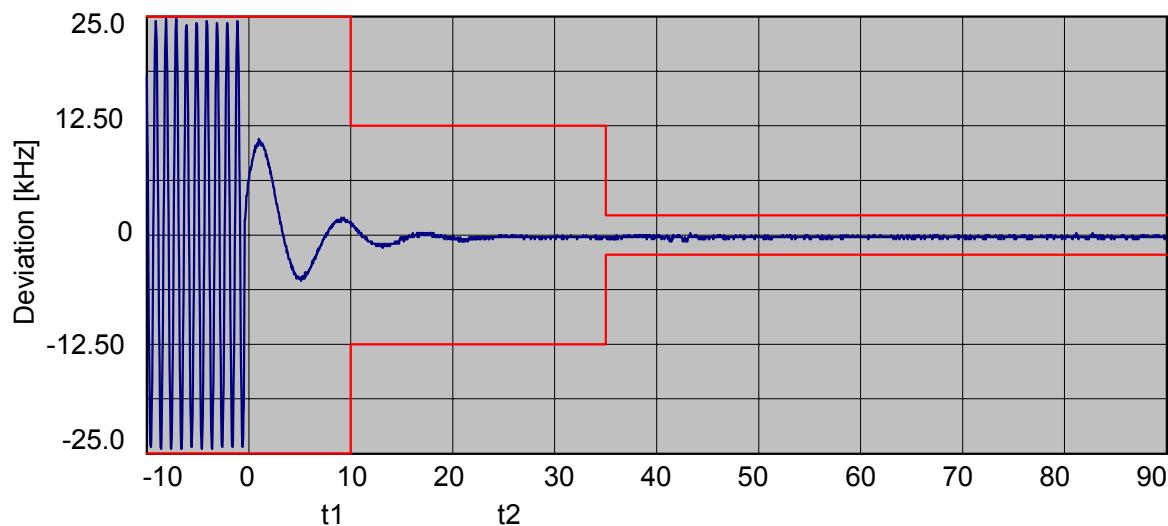

Time [ms]

Model Name:	VX-929-G7-5	Type:	Mobile/Portable
Serial Number:	4M000006	Trigger Direction:	Rise
Test Frequency:	512	Ref. Standard	EIA
Channel Spacing:	25		

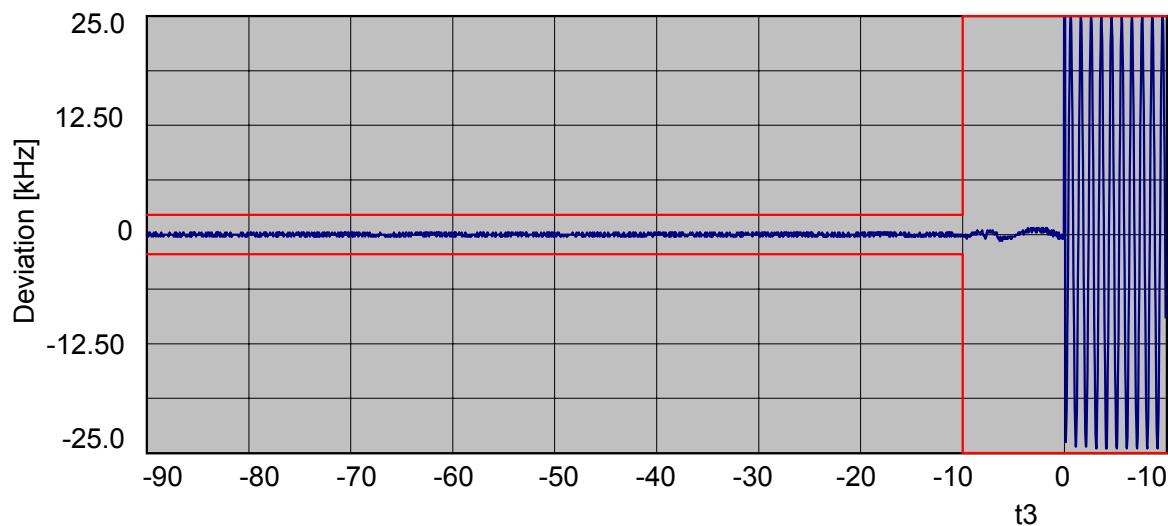


Time [ms]


Model Name:	VX-929-G7-5	Type:	Mobile/Portable
Serial Number:	4M000006	Trigger Direction:	Fall
Test Frequency:	512	Ref. Standard	EIA
Channel Spacing:	25		

NAME OF TEST: Transient Frequency Behaviour

STATE: 1 : High Power

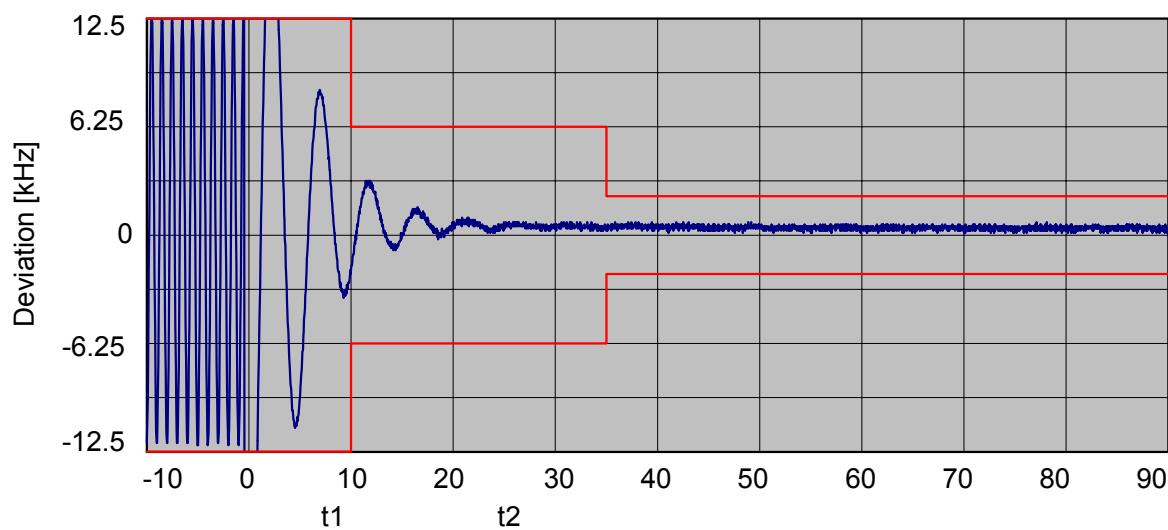


Model Name:		VX-929-G7-5	Type:	Mobile/Portable
Serial Number:		4M000006	Trigger Direction:	Rise
Test Frequency:		450	Ref. Standard	EIA
Channel Spacing:		12.5		

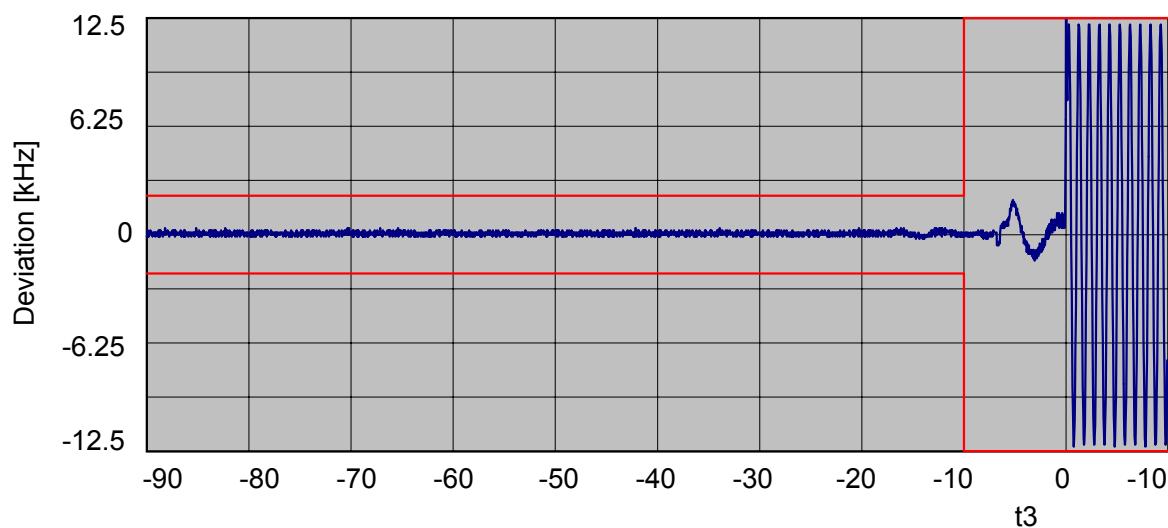


Model Name:		VX-929-G7-5	Type:	Mobile/Portable
Serial Number:		4M000006	Trigger Direction:	Fall
Test Frequency:		450	Ref. Standard	EIA
Channel Spacing:		12.5		

NAME OF TEST: Transient Frequency Behaviour

STATE: 1 : High Power

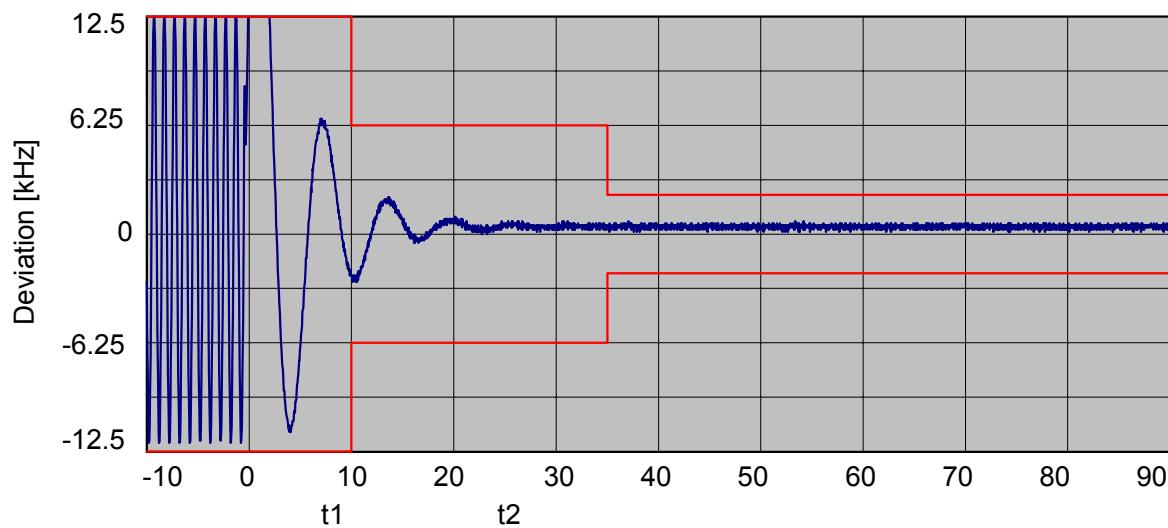


Time [ms]		
Model Name:	VX-929-G7-5	Type:
Serial Number:	4M000006	Trigger Direction:
Test Frequency:	481	Ref. Standard
Channel Spacing:	12.5	EIA

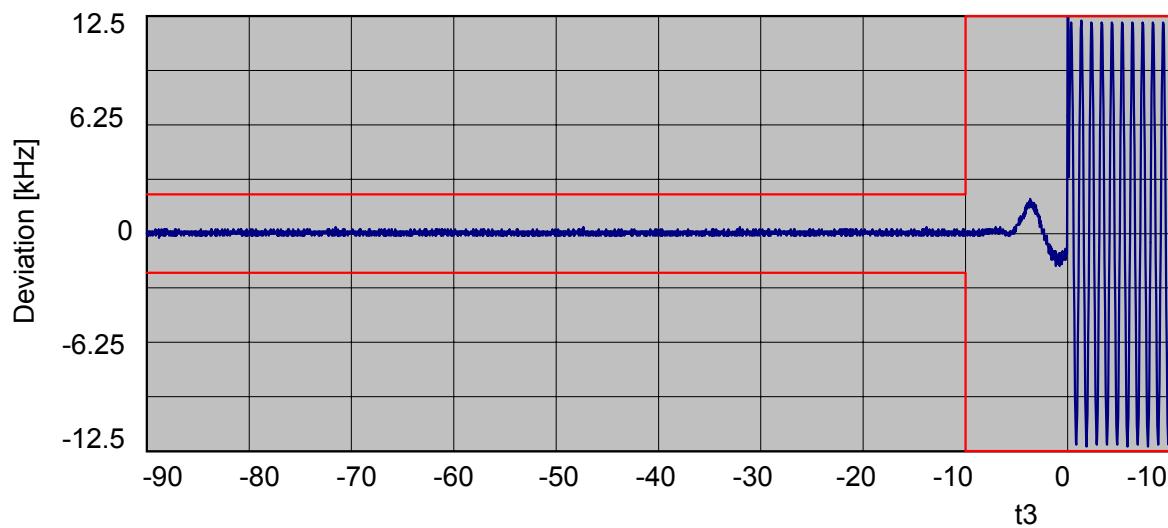


Time [ms]		
Model Name:	VX-929-G7-5	Type:
Serial Number:	4M000006	Trigger Direction:
Test Frequency:	481	Ref. Standard
Channel Spacing:	12.5	EIA

NAME OF TEST: Transient Frequency Behaviour

STATE: 1 : High Power

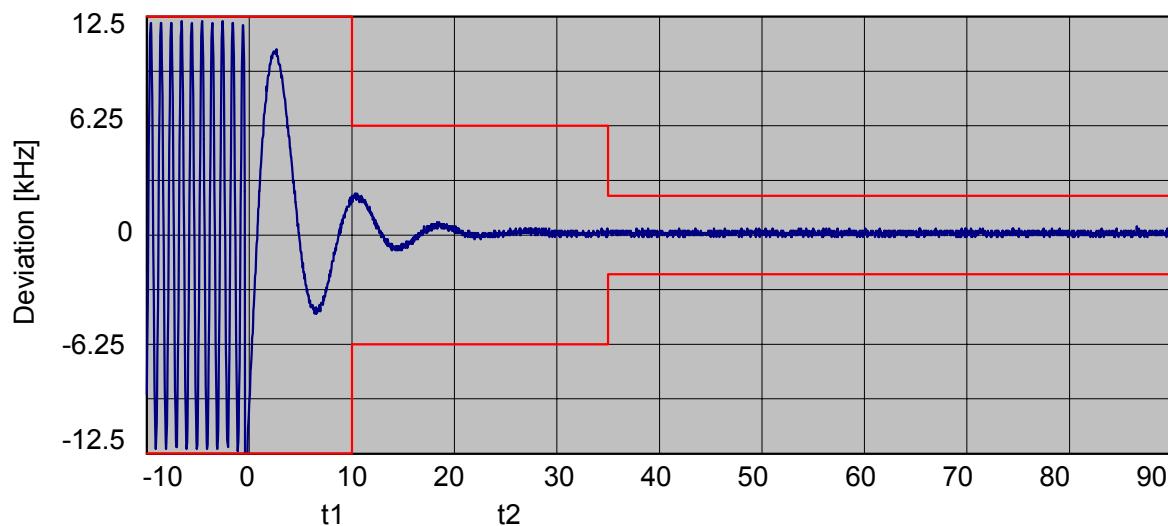

Model Name:	VX-929-G7-5	Type:	Mobile/Portable
Serial Number:	4M000006	Trigger Direction:	Rise
Test Frequency:	512	Ref. Standard	EIA
Channel Spacing:	12.5		

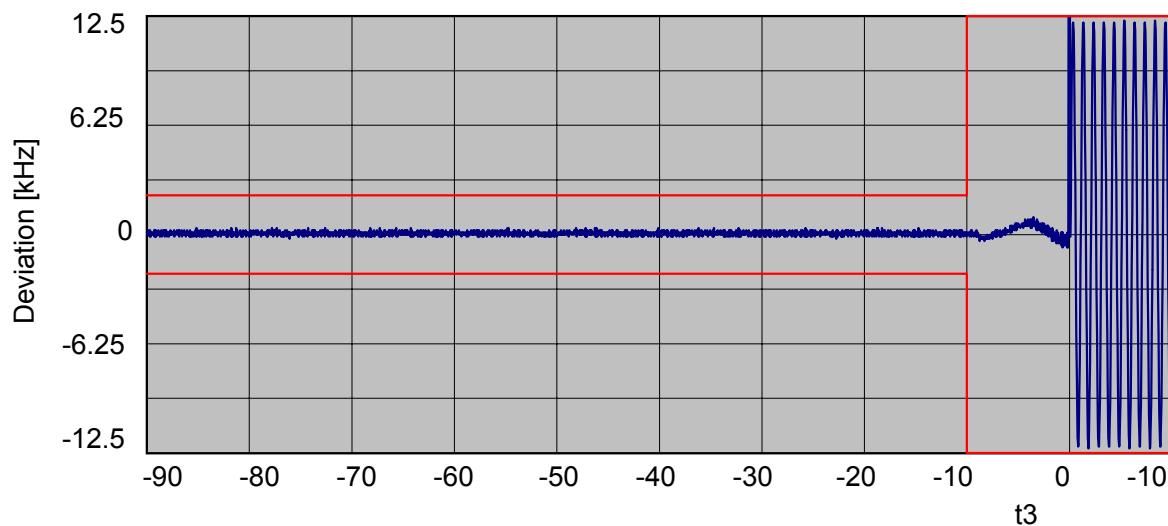

Model Name:	VX-929-G7-5	Type:	Mobile/Portable
Serial Number:	4M000006	Trigger Direction:	Fall
Test Frequency:	512	Ref. Standard	EIA
Channel Spacing:	12.5		

NAME OF TEST: Audio Low Pass Filter (Voice Input)  
SPECIFICATION: 47 CFR 2.1047 (a)  
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.15  
TEST EQUIPMENT: As per attached page

#### MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input of the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

#### TRANSMITTER TEST SET-UP


TEST A: MODULATION CAPABILITY / DISTORTION

TEST B: AUDIO FREQUENCY RESPONSE

TEST C: HUM AND NOISE LEVEL

TEST D: RESPONSE OF LOW PASS FILTER


TEST E: MODULATION KIMITING

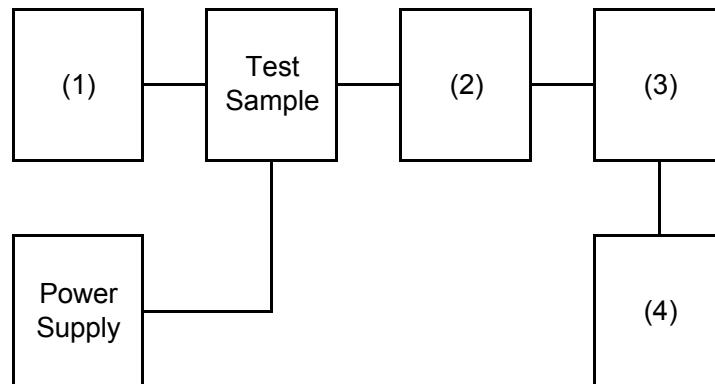

Instruments	Description	Serial Number
(1) AUDIO GENERATOR	Agilent 8903B	***
(2) COAXIAL ATTENUATOR	Agilent 8498A	***
(3) MODULATION ANALYZER	Agilent 8901B	***
(4) AUDIO ANALYZER	Agilent 8903B	***

NAME OF TEST: Audio Low Pass Filter (Voice Input)

STATE: 0 : General

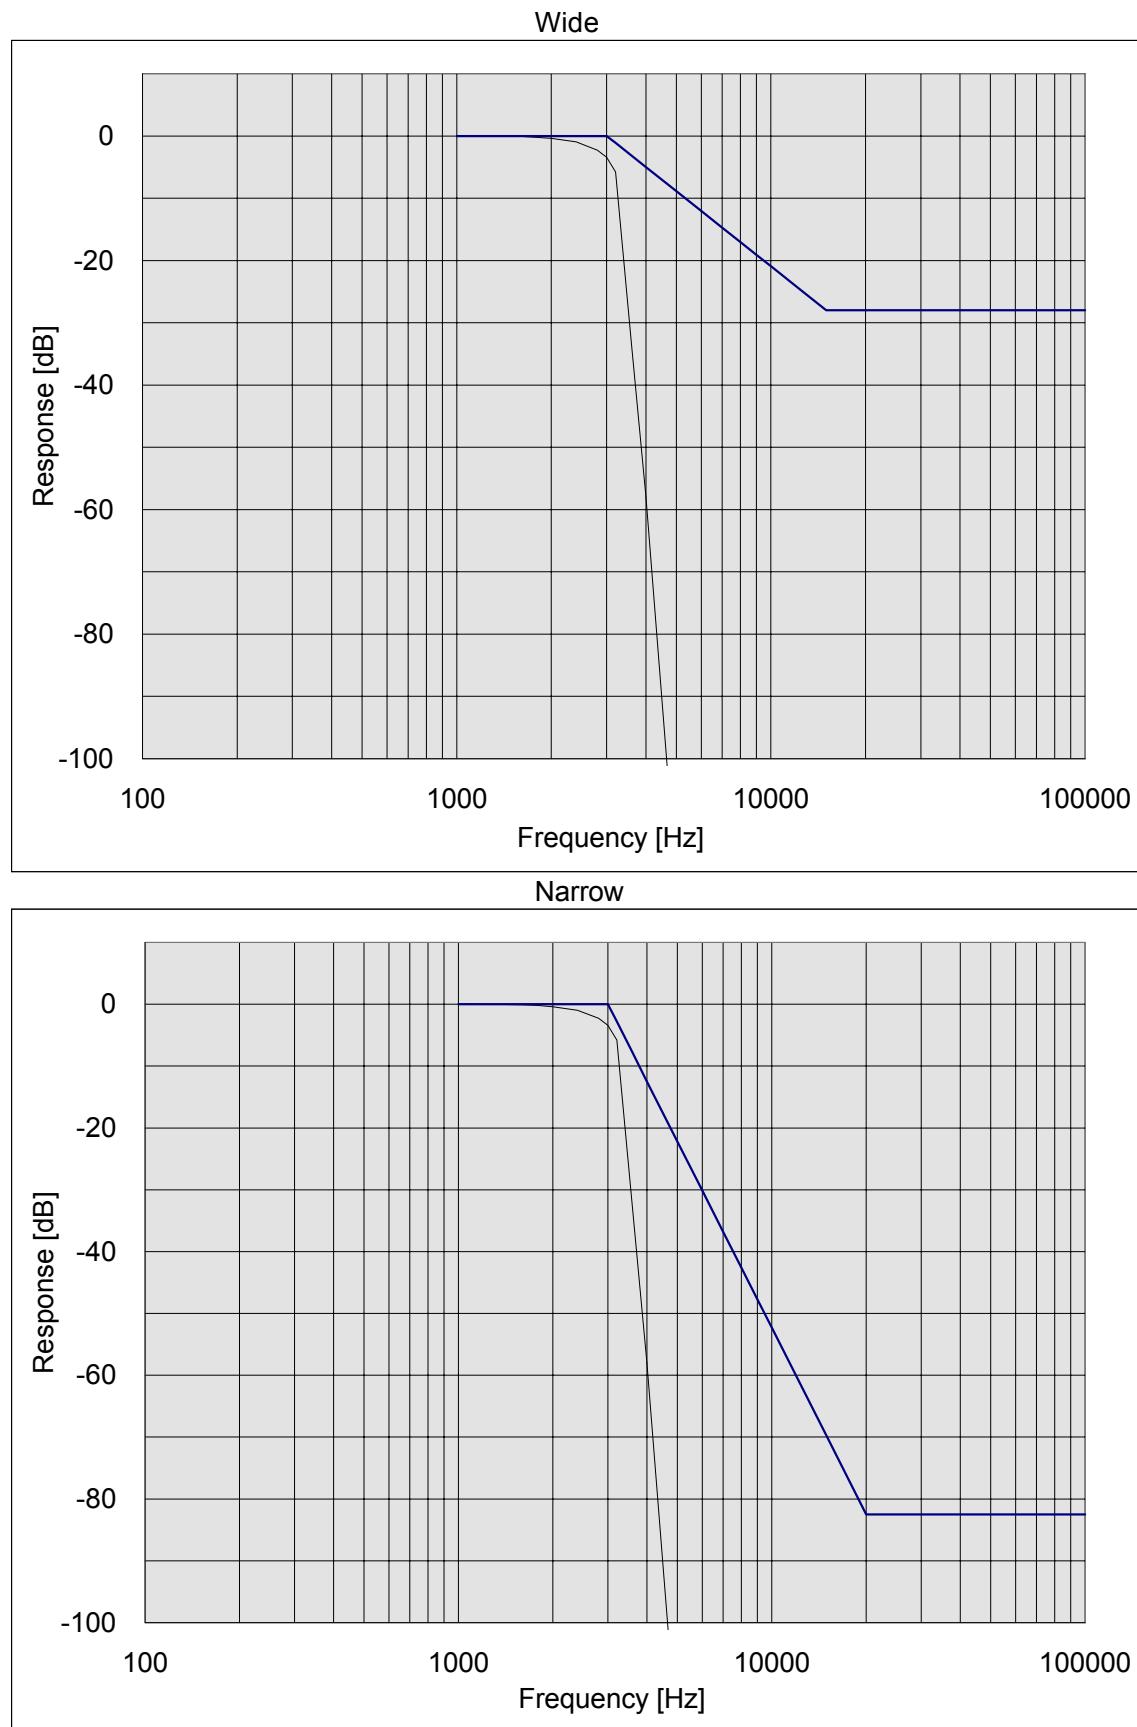


NAME OF TEST: Audio Frequency Response  
SPECIFICATION: 47 CFR 2.1047 (a)  
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.6  
TEST EQUIPMENT: As per previous page

#### MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1kHz, and this point was taken as the 0dB reference level.
4. Which input levels hold constant and below limiting at all frequencies, the audio signal generator was varied from 100Hz to 5kHz.
5. The response in dB relative to 1kHz was then measured, using the Agilent 8901B modulation analyzer.
6. MEASUREMENT RESULTS: ATTACHED

NAME OF TEST: Audio Frequency Response

STATE: 0 : General

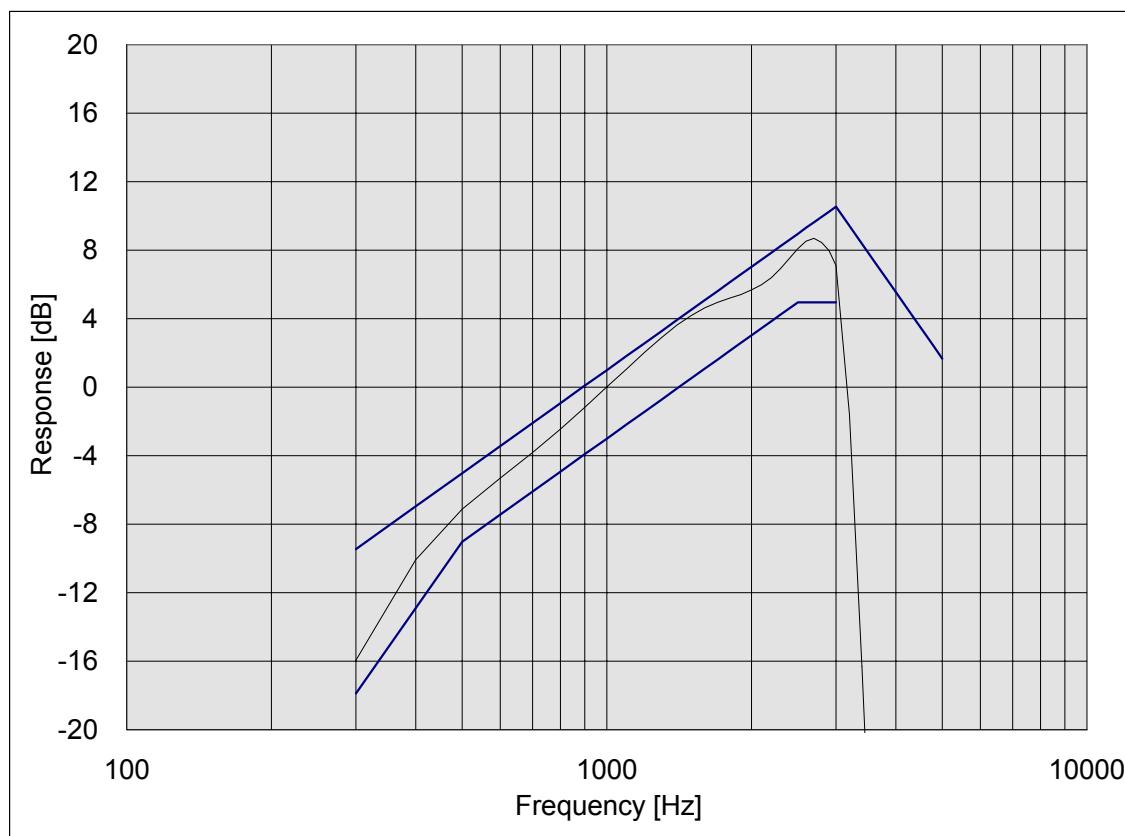

PEAK AUDIO FREQUENCY : 2700 [Hz]

NAME OF TEST: Modulation Limiting  
SPECIFICATION: 47 CFR 2.1047 (b)  
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.3  
TEST EQUIPMENT: As per previous page

#### MEASUREMENT PROCEDURE


1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit".
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an Agilent 8901B modulation analyzer.
3. The input level was varied from 30% modulation ( $\pm 1.5\text{kHz}$  deviation) to at least 20dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

NAME OF TEST: Modulation Limiting


STATE: 0 : General

Positive Peak      Wide

0 dB = 4.5 [mV]

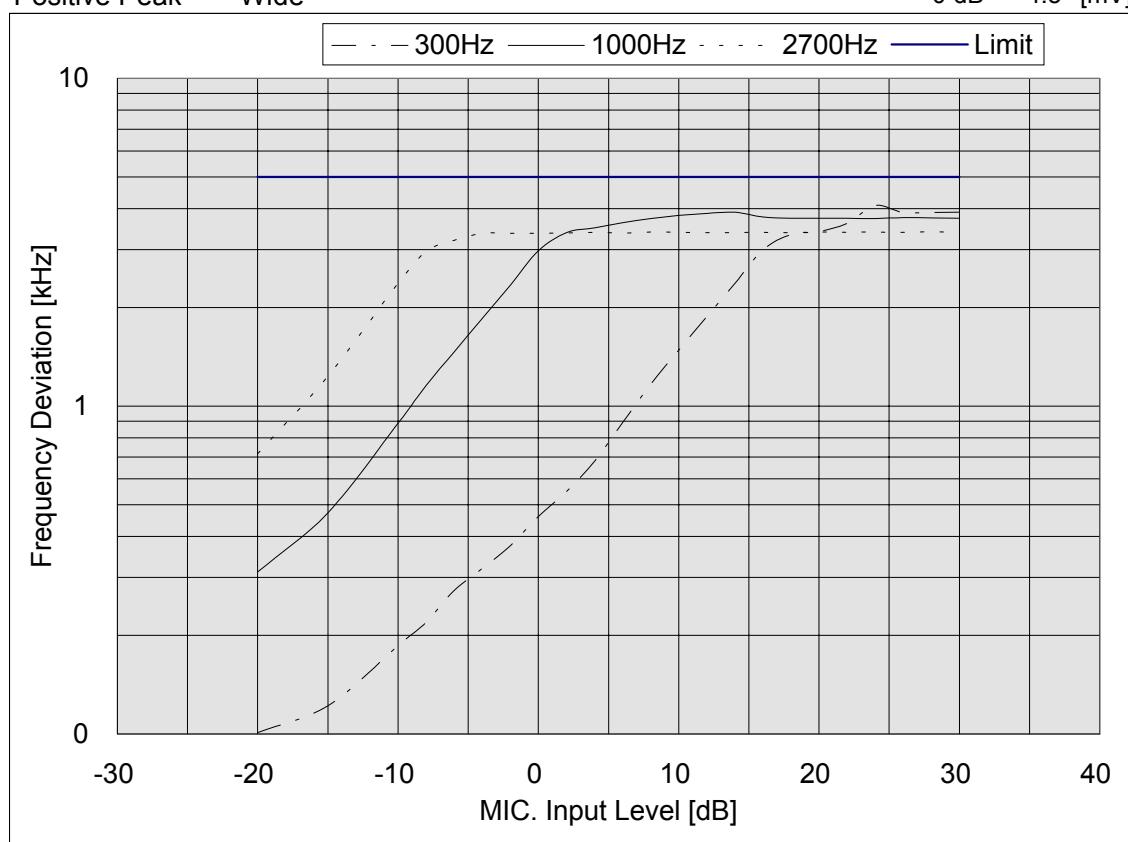

Negative Peak      Wide

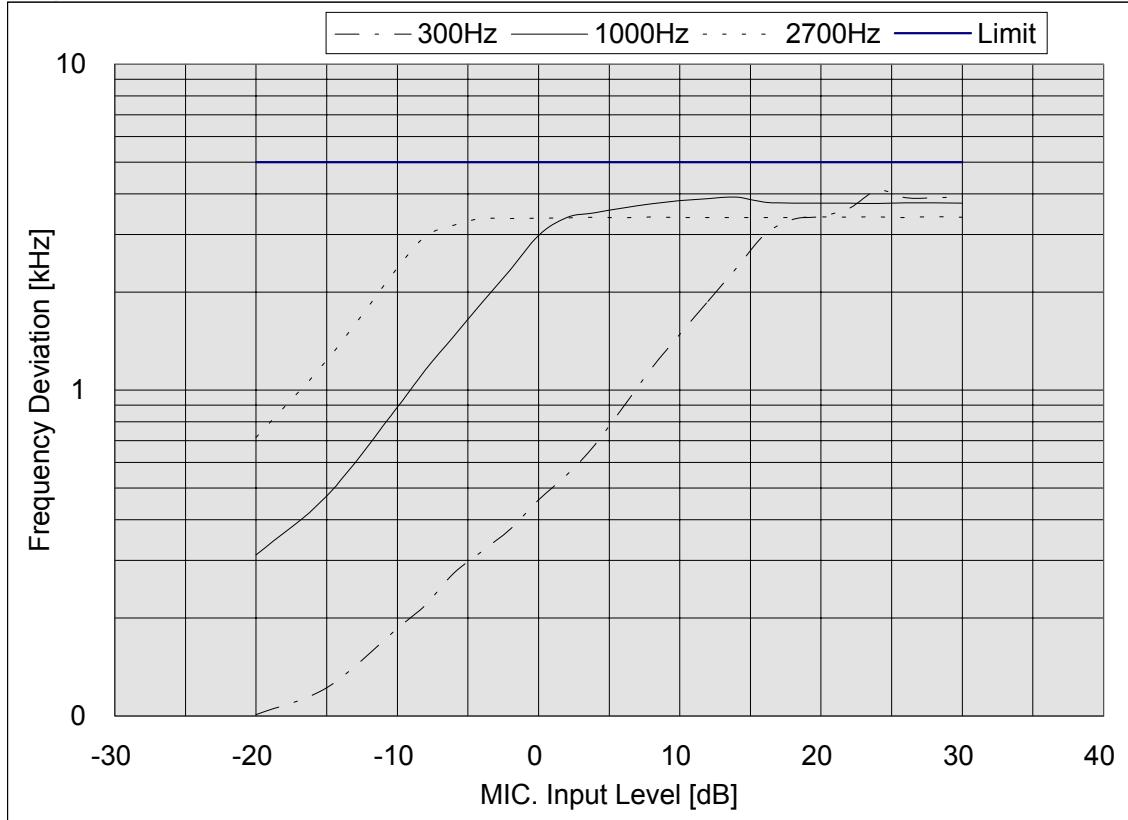


NAME OF TEST: Modulation Limiting


STATE: 0 : General

Positive Peak Narrow

0 dB = 4.5 [mV]

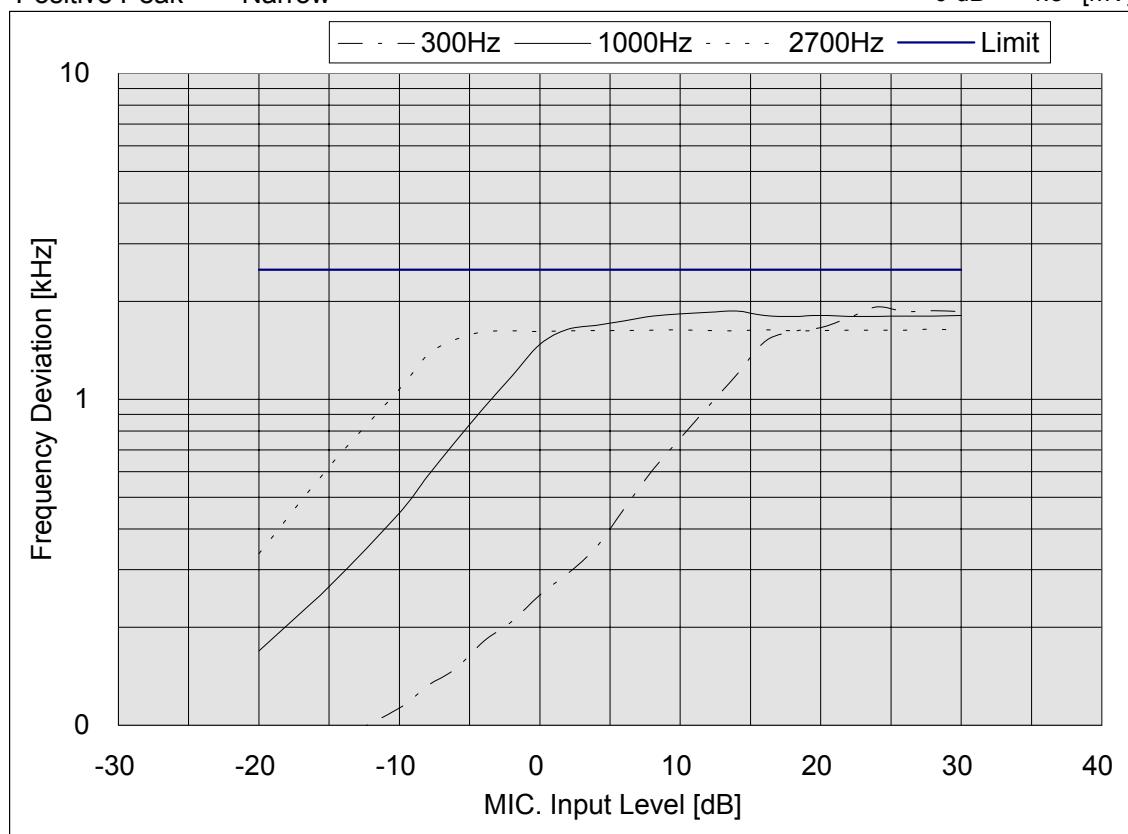

Negative Peak Narrow

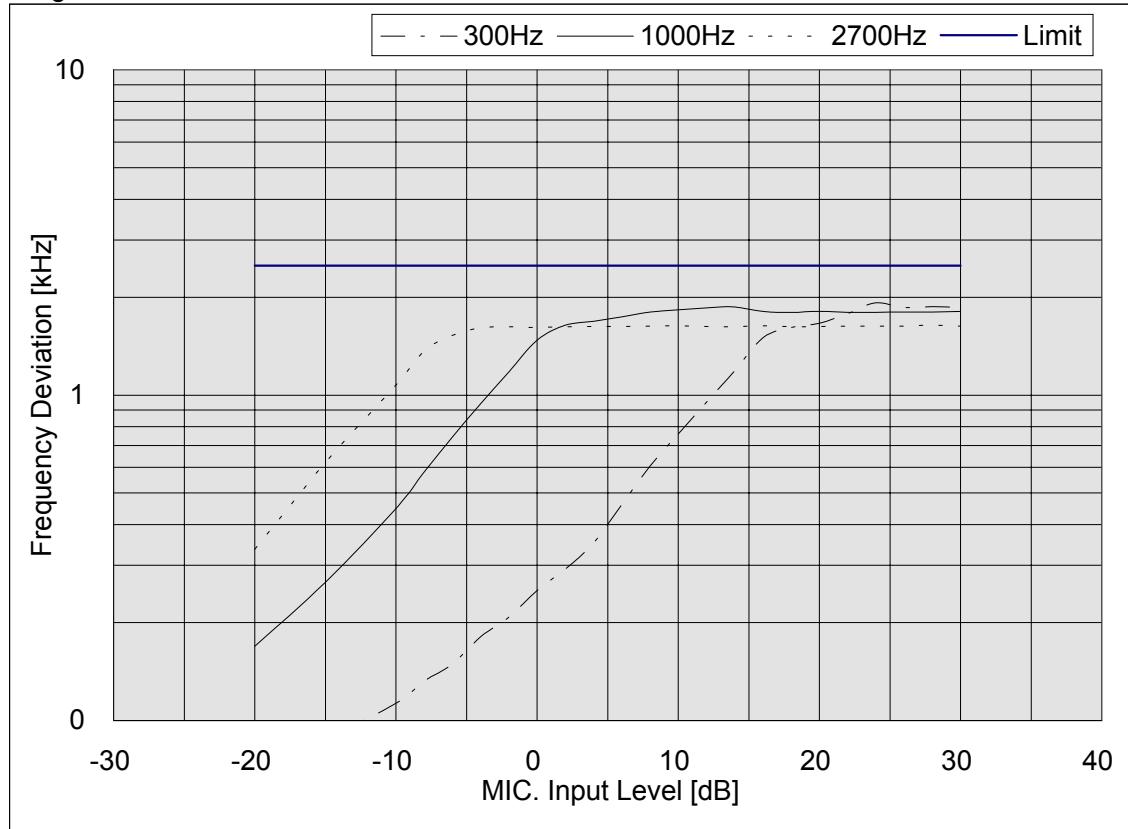


NAME OF TEST: Frequency Stability (Temperature Variation)  
SPECIFICATION: 47 CFR 2.1055 (a) (1)  
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.2  
TEST CONDITIONS: As indicated  
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP


TEST A: OPERATIONAL STABILITY  
TEST B: CARRIER FREQUENCY STABILITY  
TEST C: OPERATIONAL PERFORMANCE STABILITY  
TEST D: HUMIDITY  
TEST E: VIBRATION  
TEST F: ENVIRONMENTAL TEMPERATURE  
TEST G: FREQUENCY STABILITY, TEMPERATURE VARIATION  
TEST H: FREQUENCY STABILITY, VOLTAGE VARIATION

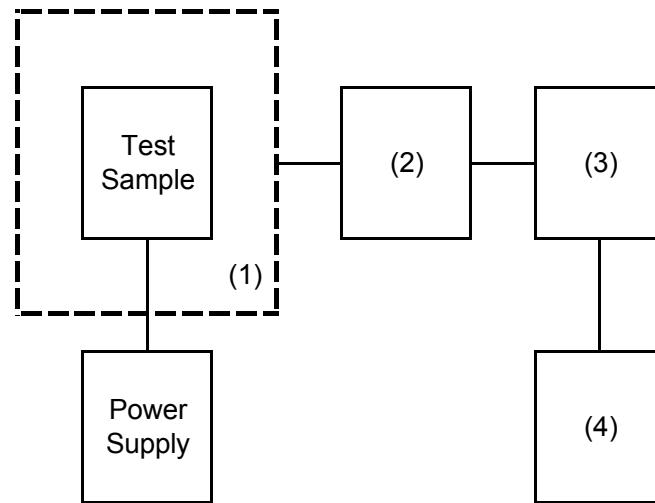

Instruments	Description	Serial Number
(1) TEMPERATURE CHAMBER	ETAC FX4100	***
(2) COAXIAL ATTENUATOR	Weinschel 53-30-33	***
(3) POWER METER	Agilent 436A	***
(4) FREQUENCY COUNTER	Agilent 8901B FREQUENCY MODI	***

NAME OF TEST: Frequency Stability (Temperature Variation)

STATE: 0 : General

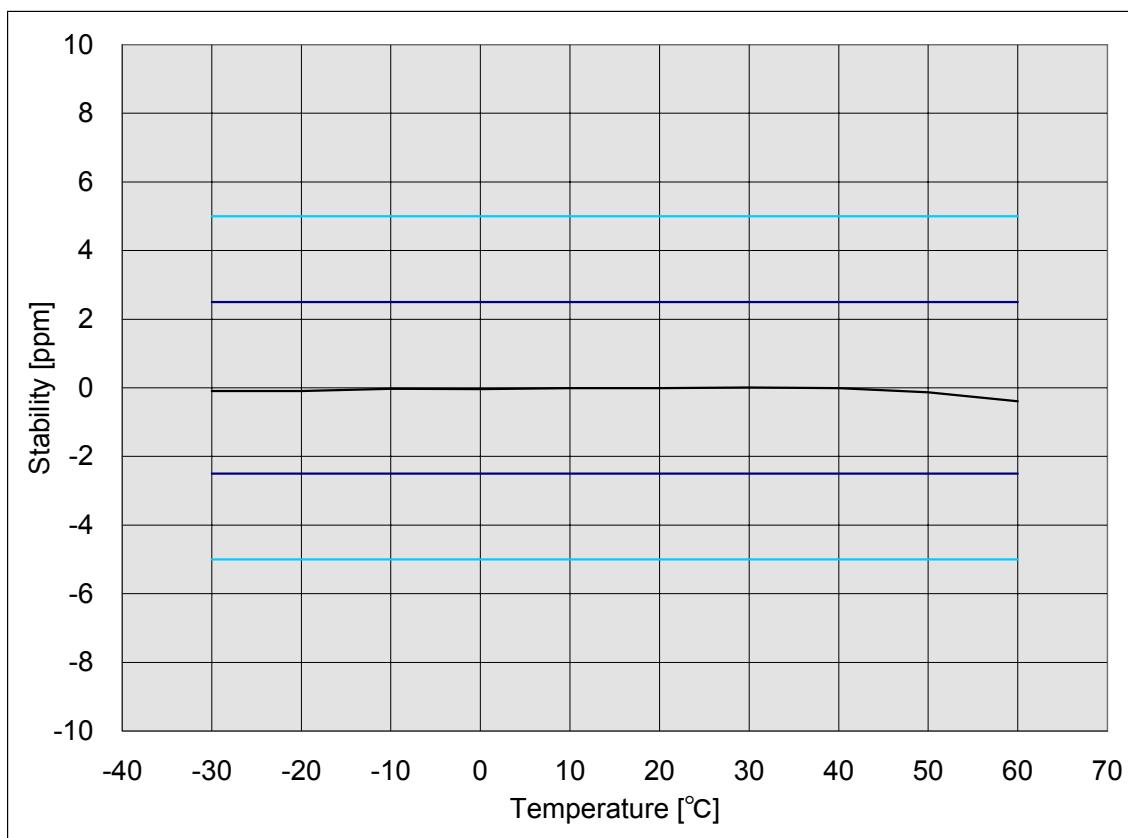

NAME OF TEST: Frequency Stability (Voltage Variation)  
SPECIFICATION: 47 CFR 2.1055 (b)  
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.2  
TEST EQUIPMENT: As per previous page

#### MEASUREMENT PROCEDURE


1. The EUT was placed in a temperature chamber at  $25\pm5^{\circ}\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

STATE: 0 : General

LIMIT', ppm = 2.5  
 LIMIT', Hz = 1203

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	6.29	481.000190	190	0.40
100	7.40	481.000190	190	0.40
115	8.51	481.000180	180	0.37

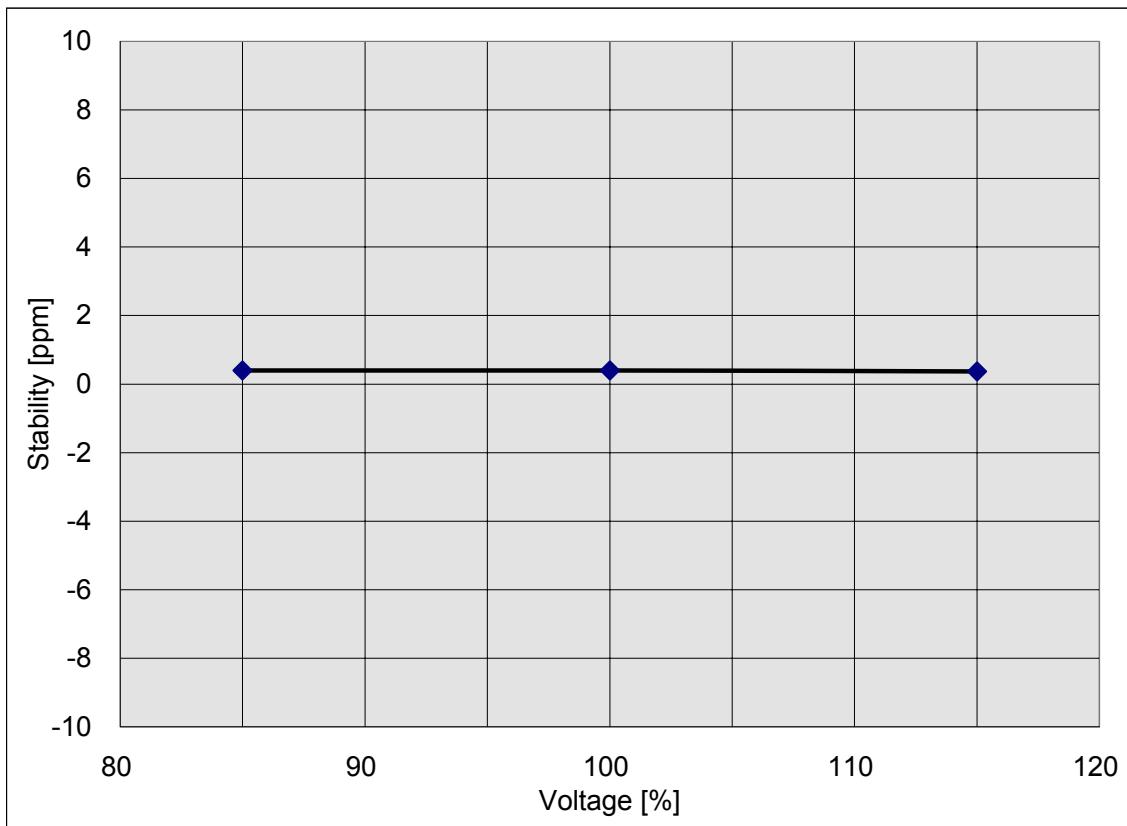

NAME OF TEST:      Necessary Bandwidth and Emission Bandwidth  
SPECIFICATION:      47 CFR 2.202 (g)

MODULATION    =    16K0F3E

NECESSARY BANDWIDTH CALUCULATION:

MAXIMUM MODULATION (M), kHz    =    3  
MAXIMUM DEVIATION (D), kHz    =    5  
CONSTANT FACTOR (K)    =    1  
NECESSARY BANDWIDTH (BN), kHz =     $(2 \times M) + (2 \times D \times K)$   
    =    16

MODULATION    =    11K0F3E

NECESSARY BANDWIDTH CALUCULATION:

MAXIMUM MODULATION (M), kHz    =    3  
MAXIMUM DEVIATION (D), kHz    =    3  
CONSTANT FACTOR (K)    =    1  
NECESSARY BANDWIDTH (BN), kHz =     $(2 \times M) + (2 \times D \times K)$   
    =    11

NAME OF TEST: Receiver Spurious Emissions (Conducted)

STATE: 0 : General

All other emissions in the required measurement range were more than 20dB below the required limits.

MEASUREMENT RESULTS

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, nW
134.000	184.850	-62.2	0.6026
154.000	204.850	-72.0	0.0631
481.000	430.150	-76.6	0.0219
174.000	449.700	-75.4	0.0288
450.000	1995.750	-74.7	0.0343

NAME OF TEST: Receiver Spurious Emissions (Radiated)

STATE: 0 : General

All other emissions in the required measurement range were more than 20dB below the required limits.

MEASUREMENT RESULTS

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBuV	@m	CF, dB	uV/m
174.000	224.800	29.3	3	-2.7	32.0
134.000	369.700	29.7	3	-4.4	34.1
450.000	399.150	35.9	3	-4.2	40.1
154.000	409.700	30.5	3	-4.3	34.8
481.000	430.150	31.7	3	-4.4	36.1
512.000	461.150	29.3	3	-3.3	32.6
481.000	1290.450	32.1	3	-9.2	41.3
450.000	1596.600	39.2	3	-6.4	45.6
481.000	1720.600	40.5	3	-5.6	46.1