

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 1 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Annex A: Measurement data and plots

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 2 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

A.1 Dipole validation plots

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 3 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/11/2010 1:19:04 PM

Test Laboratory: RIM Testing Services

HAC_E_Dipole_835MHz

DUT: HAC-Dipole 835 MHz; Type: D835V3

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - measurement distance from the probe sensor center to

CD835 Dipole = 10mm/Hearing Aid Compatibility Test (5x37x1):

Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 103.5 V/m; Power Drift = 0.023 dB

Maximum value of Total (measured) = 166.2 V/m

E Scan - measurement distance from the probe sensor center to

CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 4 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 168.7 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 103.5 V/m; Power Drift = 0.023 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 160.3 M4	Grid 2 161.2 M4	Grid 3 146.0 M4
Grid 4 91.9 M4	Grid 5 91.9 M4	Grid 6 80.1 M4
Grid 7 168.7 M4	Grid 8 168.7 M4	Grid 9 146.6 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 5 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

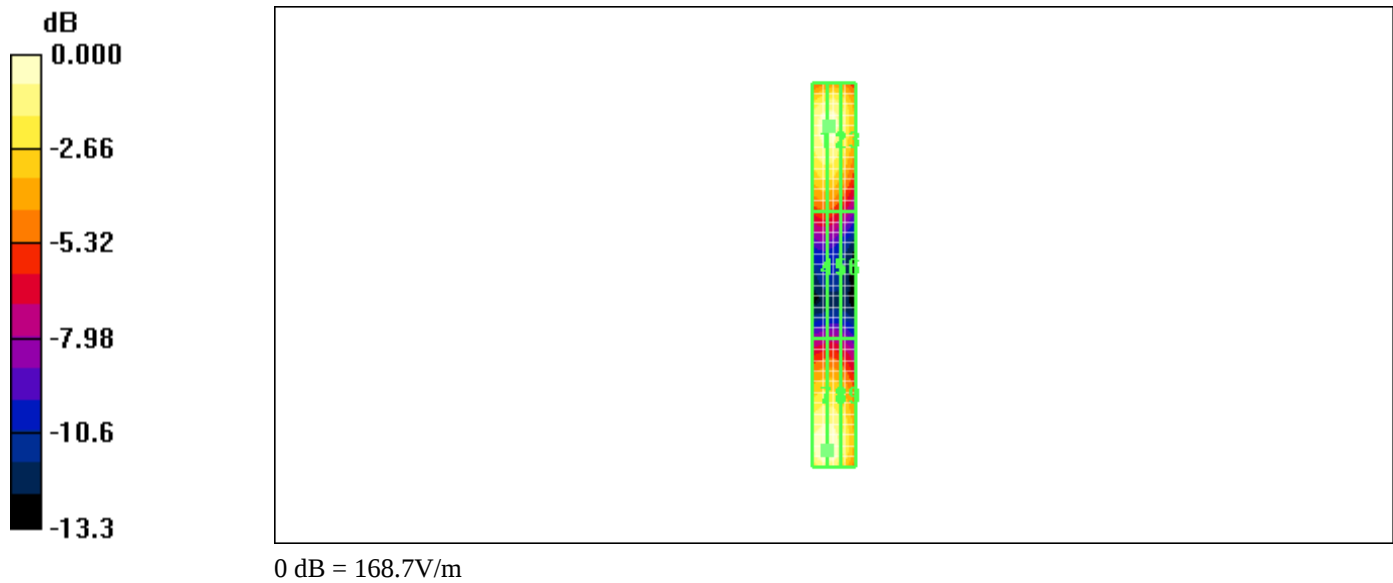

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 6 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/11/2010 1:31:19 PM

Test Laboratory: RIM Testing Services

HAC_E_Dipole_1880MHz

DUT: HAC Dipole 1880 MHz; Type: CD1880V3

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (5x19x1):

Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 141.6 V/m; Power Drift = 0.039 dB

Maximum value of Total (measured) = 126.4 V/m

E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 7 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 128.9 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 141.6 V/m; Power Drift = 0.039 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

Grid 1 123.3 M2	Grid 2 123.4 M2	Grid 3 112.4 M2
Grid 4 90.8 M3	Grid 5 90.7 M3	Grid 6 81.4 M3
Grid 7 128.8 M2	Grid 8 128.9 M2	Grid 9 114.0 M2

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 8 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

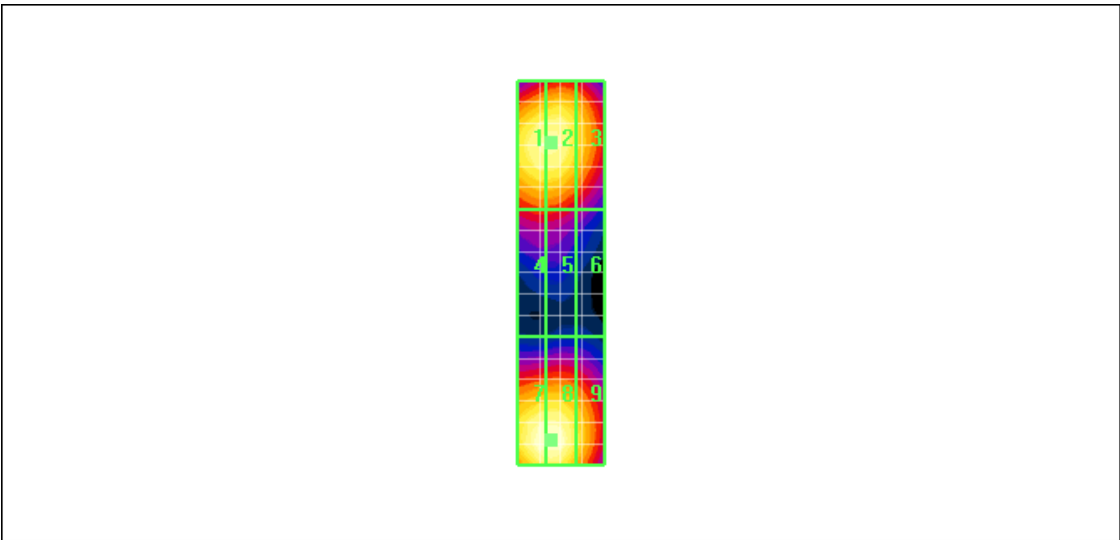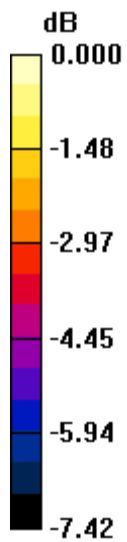

0 dB = 128.9V/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 9 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/11/2010 2:55:21 PM

Test Laboratory: RIM Testing Services

HAC_H_Dipole_835MHz

DUT: HAC-Dipole 835 MHz; Type: D835V3

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - measurement distance from the probe sensor center to

CD835 Dipole = 10mm/Hearing Aid Compatibility Test (5x13x1):

Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.478 A/m; Power Drift = -0.024 dB

Maximum value of Total (measured) = 0.464 A/m

H Scan - measurement distance from the probe sensor center to

CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x121x1):

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 10 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.469 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 0.478 A/m; Power Drift = -0.024 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.455 M4	Grid 2 0.455 M4	Grid 3 0.401 M4
Grid 4 0.469 M4	Grid 5 0.469 M4	Grid 6 0.409 M4
Grid 7 0.469 M4	Grid 8 0.469 M4	Grid 9 0.404 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 11 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

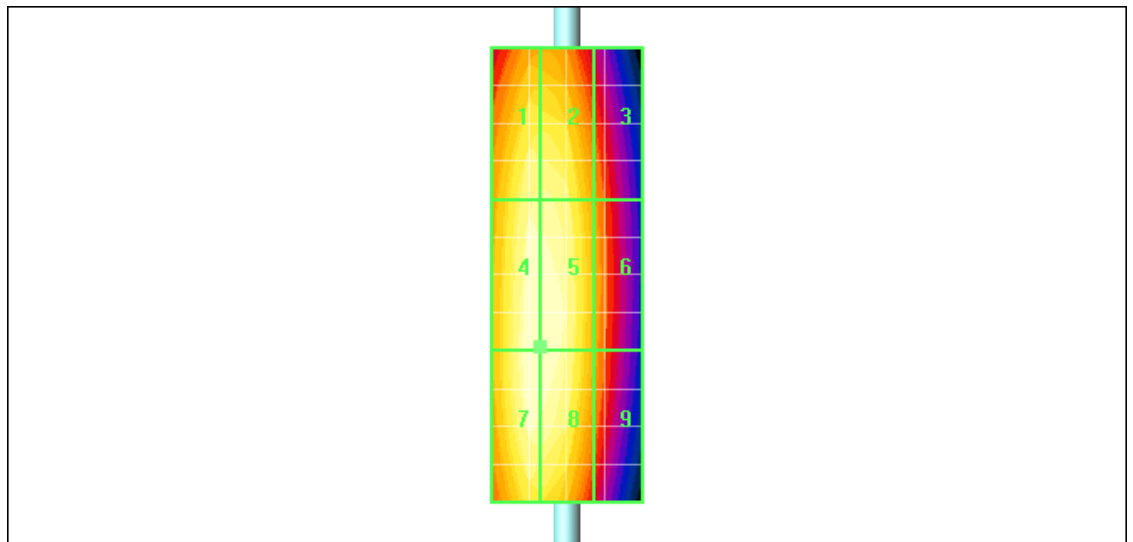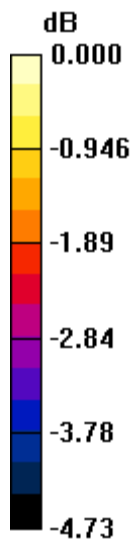

0 dB = 0.469A/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 12 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/11/2010 3:06:44 PM

Test Laboratory: RIM Testing Services

HAC_H_Dipole_1880MHz

DUT: HAC Dipole 1880 MHz; Type: CD1880V3

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - measurement distance from the probe sensor center to

CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (5x11x1):

Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.449 A/m; Power Drift = 0.023 dB

Maximum value of Total (measured) = 0.434 A/m

H Scan - measurement distance from the probe sensor center to

CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x101x1):

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 13 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.440 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 0.449 A/m; Power Drift = 0.023 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.419 M2	Grid 2 0.419 M2	Grid 3 0.369 M2
Grid 4 0.440 M2	Grid 5 0.440 M2	Grid 6 0.388 M2
Grid 7 0.436 M2	Grid 8 0.436 M2	Grid 9 0.380 M2

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 14 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

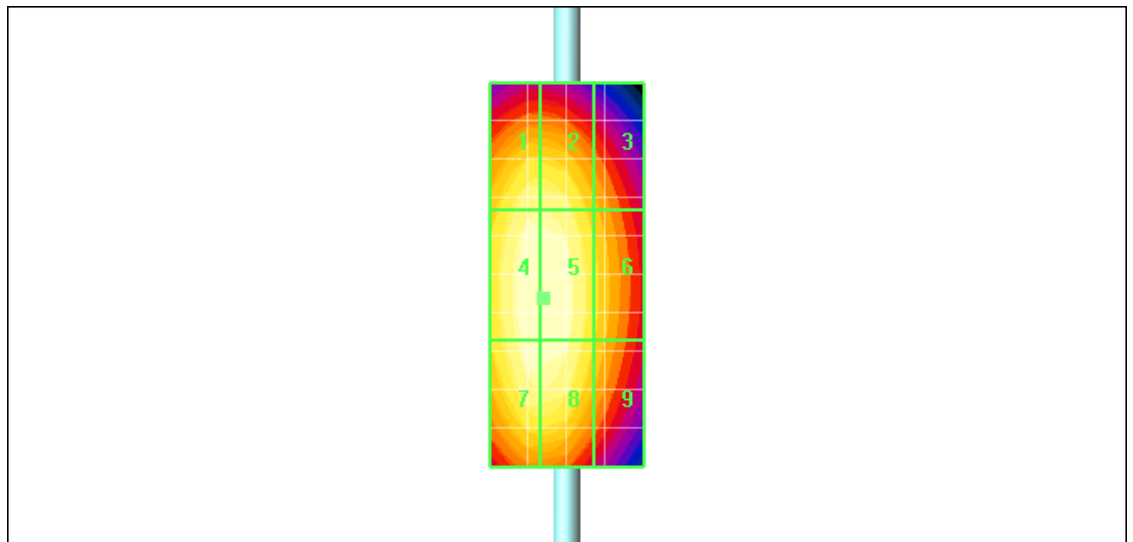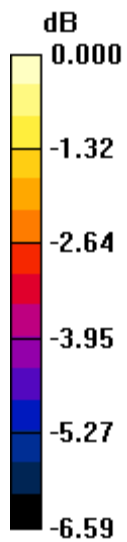


0 dB = 0.440A/m


	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 15 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Justification of Step Size and Interpolation

This section demonstrates that a 5mm step size with interpolation provides sufficient resolution for RF emissions measurements. The DASY 4 uses interpolation algorithms to derive 9 interpolated points between every measured point.

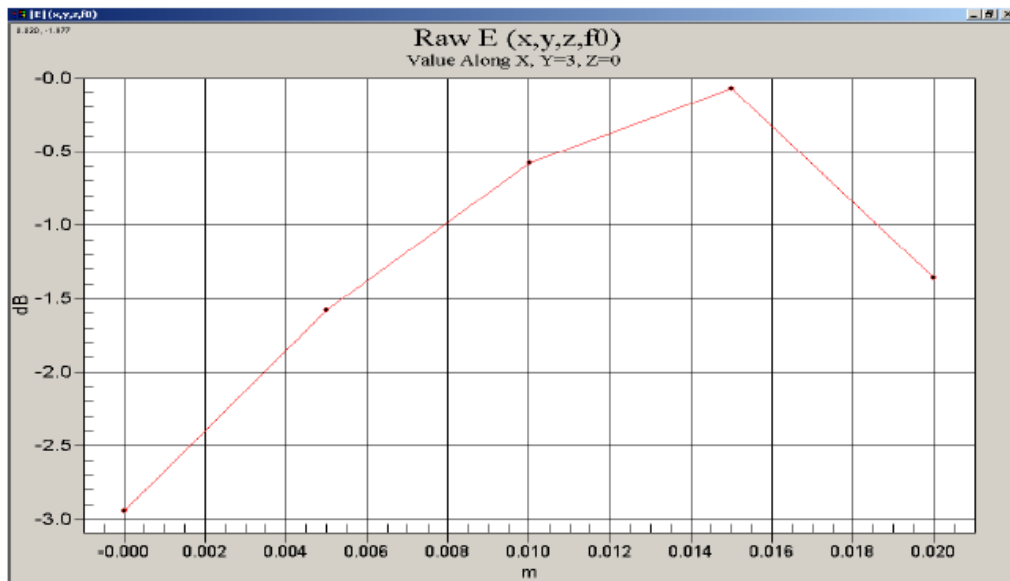


The figure above shows the raw measured field strength perpendicular to the length of the validation dipole. The TCB guidance slides require the 3dB width to be much larger than the step size. The width between -3dB points is > 21mm, at least 4 times the step size.

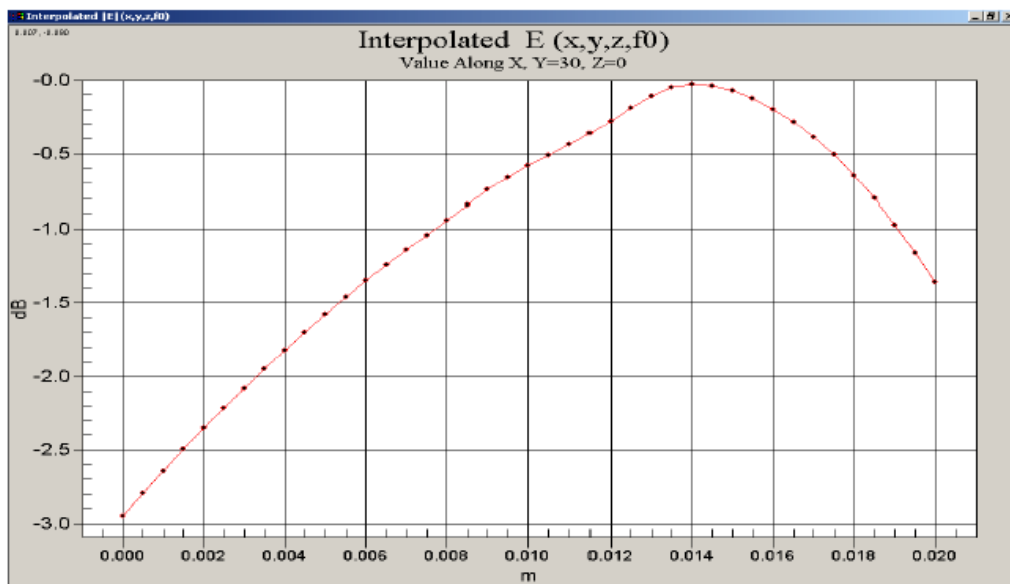

This figure shows the interpolated field strength perpendicular to the dipole. The interpolated points follow the raw points with no inconsistencies.

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 16 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

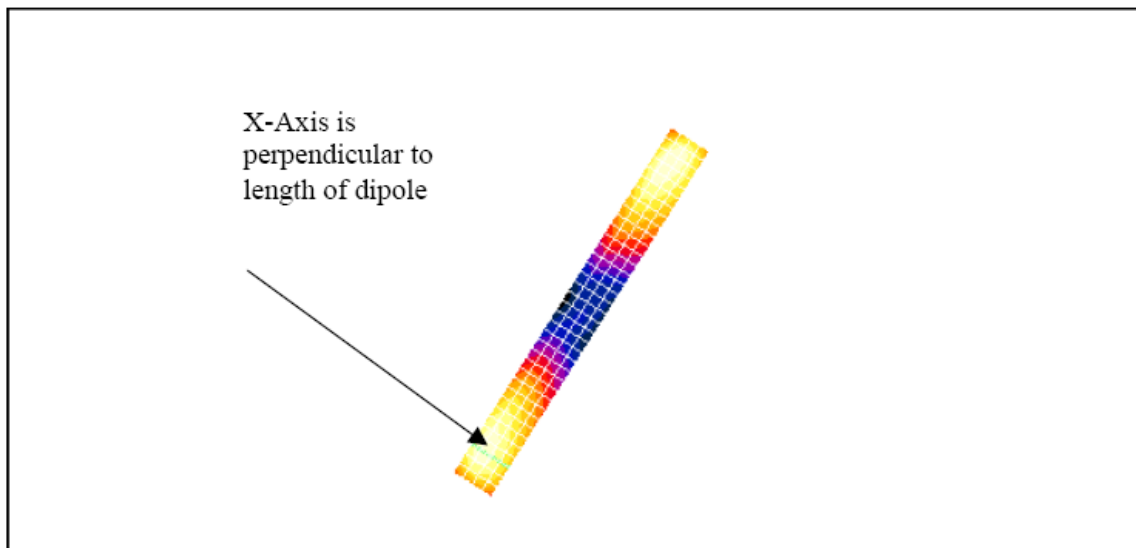

The green line in this figure shows the axis along which the points lie.

Comparison of 5mm and 2mm step sizes

An additional set of measurements was taken: dipole validations were performed using 5mm and 2mm step sizes. The delta between the two readings is insignificant for both field types ($< 0.4\%$ for E and 0% for H), demonstrating that 5mm is sufficient. The plots follow.

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 17 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 14/07/2005 11:35:24 AM

Page 1 of 2

Date/Time: 14/07/2005 11:35:24 AM

Lab: RIM Testing Services (RTS)

Dipole Validation 1880 MHz_E-Field 07_14_05

DUT: HAC Dipole 1880 MHz; Type: CD1880V3

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2285; ConvF(1, 1, 1); Calibrated: 10/12/2004
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn472; Calibrated: 03/01/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (5x19x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of Total (measured) = 134.8 V/m

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of Total field (slot averaged) = 131.0 V/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

E in V/m (Time averaged) E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
123.2	138.1	138.4	123.2	138.1	138.4
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
80.9	92.3	92.2	80.9	92.3	92.2
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
119.8	131.0	130.7	119.8	131.0	130.7


Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 18 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 14/07/2005 11:35:24 AM

Page 2 of 2

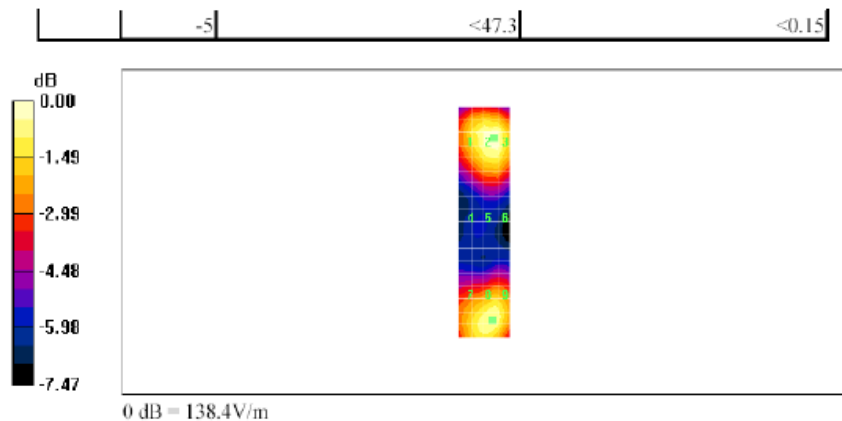

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 19 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 14/07/2005 11:44:51 AM

Page 1 of 2

Date/Time: 14/07/2005 11:44:51 AM

Lab: RIM Testing Services (RTS)

Dipole Validation 1880 MHz_2mm step_E-Field 07_14_05

DUT: HAC Dipole 1880 MHz; Type: CD1880V3

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2285; ConvF(1, 1, 1); Calibrated: 10/12/2004
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn472; Calibrated: 03/01/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (11x46x1):

Measurement grid: dx=2mm, dy=2mm

Maximum value of Total (measured) = 138.0 V/m

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (101x451x1):

Measurement grid: dx=2mm, dy=2mm

Maximum value of Total field (slot averaged) = 131.2 V/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

E in V/m (Time averaged) E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
123.1	138.6	138.6	123.1	138.6	138.6
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
81.4	92.1	91.6	81.4	92.1	91.6
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
121.3	131.2	131.0	121.3	131.2	131.0


Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 20 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 14/07/2005 11:44:51 AM

Page 2 of 2

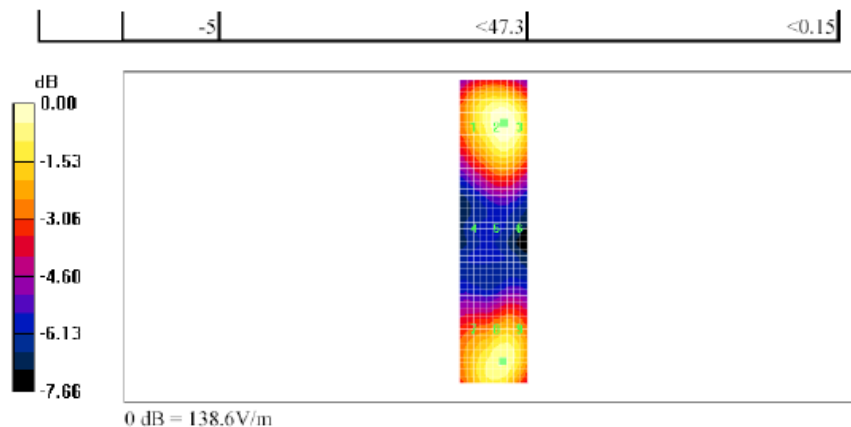

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 21 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 14/07/2005 12:43:02 PM

Page 1 of 2

Date/Time: 14/07/2005 12:43:02 PM

Lab: RIM Testing Services (RTS)

HAC_H_Dipole_CW 1880_5 mm step_07_14_05

DUT: HAC Dipole 1880 MHz; Type: CD1880V3

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

DASY4 Configuration:

- Probe: H3DV6 - SN6105; ; Calibrated: 10/12/2004
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn472; Calibrated: 03/01/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (5x19x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of Total (measured) = 0.406 A/m

H Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of Total field (slot averaged) = 0.406 A/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.342	0.359	0.344	0.342	0.359	0.344
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.389	0.406	0.389	0.389	0.406	0.389
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.363	0.378	0.363	0.363	0.378	0.363


Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19

file://C:\Program%20Files\DASY4\Print_Templates\HAC_H_Dipole_CW%201880_5%... 14/07/2005

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 22 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 14/07/2005 12:43:02 PM

Page 2 of 2

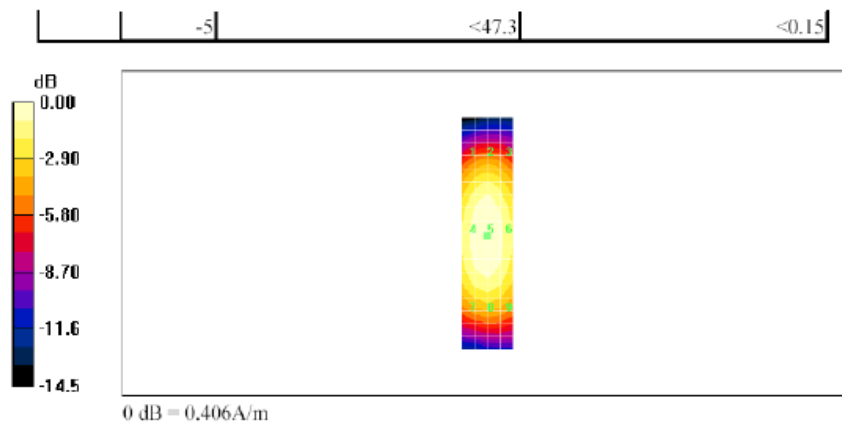

file://C:\Program%20Files\DASY4\Print_Templates\HAC_H_Dipole_CW%201880_5%... 14/07/2005

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 23 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 14/07/2005 12:53:40 PM

Page 1 of 2

Date/Time: 14/07/2005 12:53:40 PM

Lab: RIM Testing Services (RTS)

HAC_H_Dipole_CW 1880_2 mm step_07_14_05

DUT: HAC Dipole 1880 MHz; Type: CD1880V3

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

DASY4 Configuration:

- Probe: H3DV6 - SN6105; ; Calibrated: 10/12/2004
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn472; Calibrated: 03/01/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (11x46x1):

Measurement grid: dx=2mm, dy=2mm

Maximum value of Total (measured) = 0.406 A/m

H Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (101x451x1):

Measurement grid: dx=2mm, dy=2mm

Maximum value of Total field (slot averaged) = 0.406 A/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.347	0.361	0.348	0.347	0.361	0.348
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.394	0.406	0.391	0.394	0.406	0.391
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.367	0.380	0.365	0.367	0.380	0.365


Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19

file://C:\Program%20Files\DASY4\Print_Templates\HAC_H_Dipole_CW%201880_2%... 14/07/2005

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 24 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 14/07/2005 12:53:40 PM

Page 2 of 2

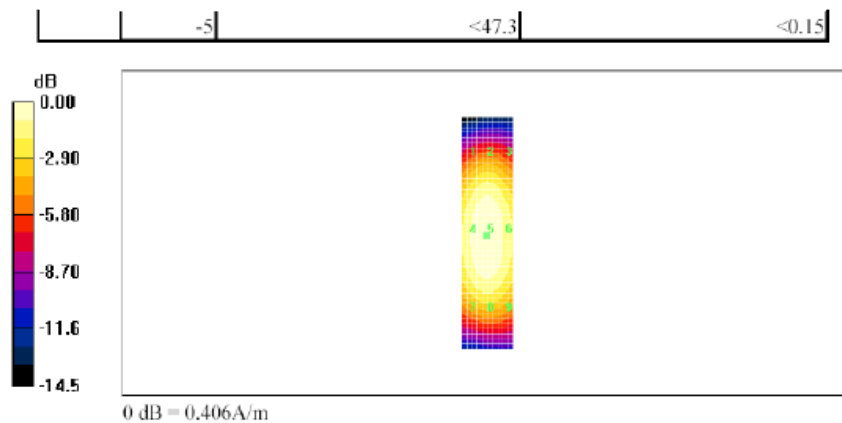

file://C:\Program%20Files\DASY4\Print_Templates\HAC_H_Dipole_CW%201880_2%... 14/07/2005

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 25 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

A.2 RF emission field plots

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 26 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 6:50:53 PM

Test Laboratory: RIM Testing Services

HAC_E_CDMA_800_low_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 800; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 117.7 V/m; Power Drift = 0.010 dB

Maximum value of Total (measured) = 91.0 V/m

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 27 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 91.9 V/m

Probe Modulation Factor = 1.01

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 117.7 V/m; Power Drift = 0.010 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 85.1 M4	Grid 2 88.6 M4	Grid 3 81.2 M4
Grid 4 86.9 M4	Grid 5 91.9 M4	Grid 6 84.5 M4
Grid 7 85.8 M4	Grid 8 90.8 M4	Grid 9 83.6 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 28 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

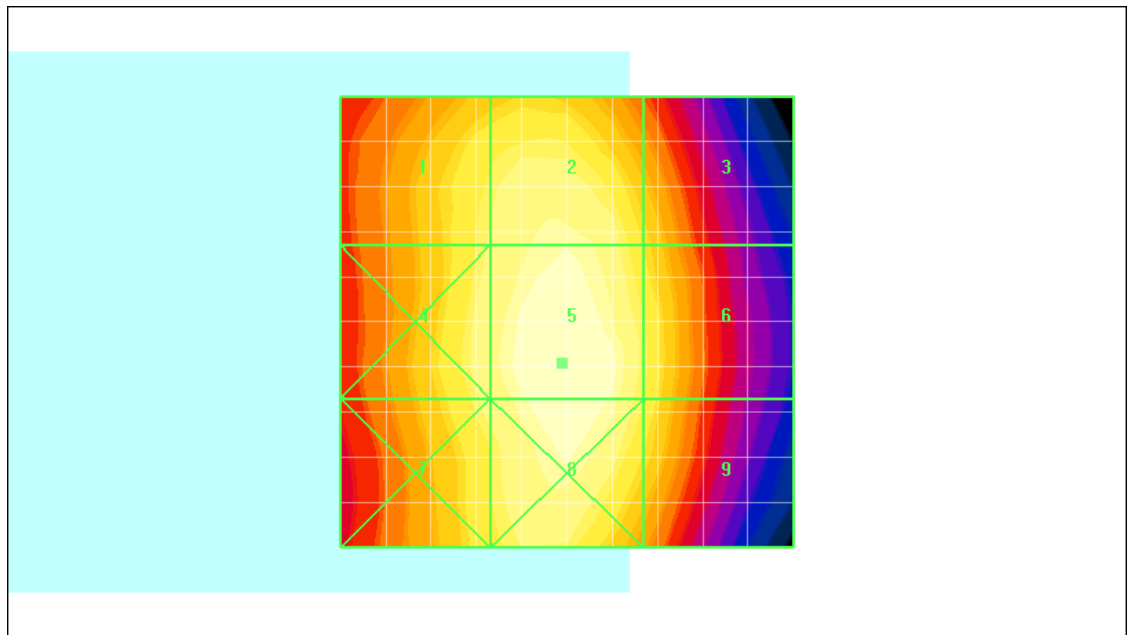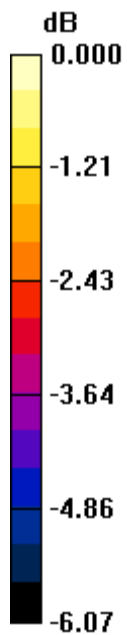

0 dB = 91.9V/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 29 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 6:55:42 PM

Test Laboratory: RIM Testing Services

HAC_E_CDMA_800_mid_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 106.9 V/m; Power Drift = -0.120 dB

Maximum value of Total (measured) = 81.3 V/m

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 30 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 82.2 V/m

Probe Modulation Factor = 1.01

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 106.9 V/m; Power Drift = -0.120 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 75.3 M4	Grid 2 79.2 M4	Grid 3 74.8 M4
Grid 4 75.9 M4	Grid 5 82.2 M4	Grid 6 77.9 M4
Grid 7 75.7 M4	Grid 8 81.7 M4	Grid 9 76.8 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 31 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

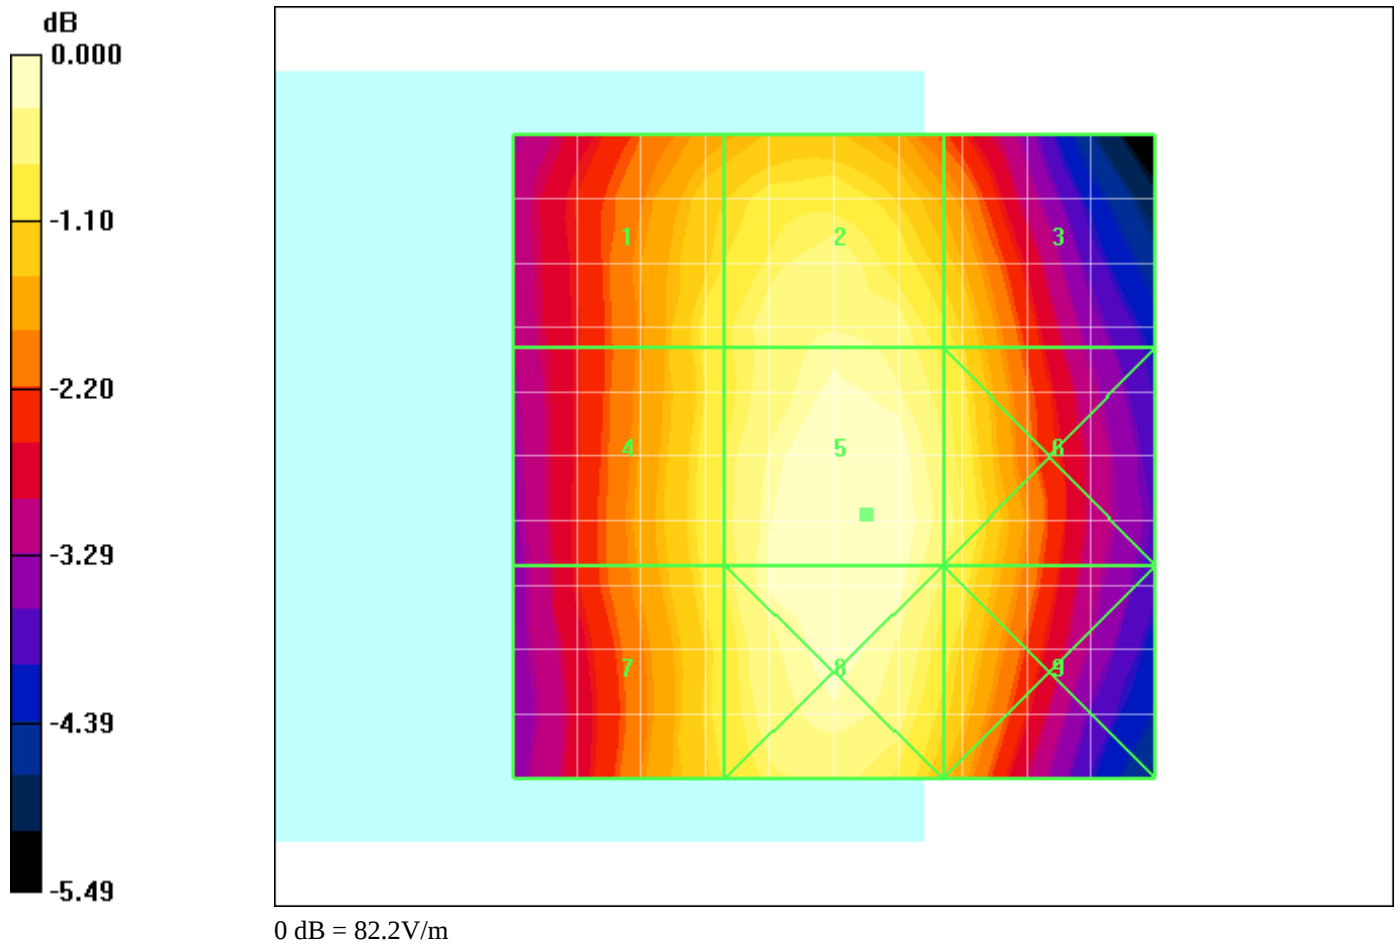

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 32 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 7:00:30 PM

Test Laboratory: RIM Testing Services

HAC_E_CDMA_800_high_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 800; Frequency: 848.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 118.2 V/m; Power Drift = -0.061 dB

Maximum value of Total (measured) = 90.6 V/m

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 33 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 91.7 V/m

Probe Modulation Factor = 1.01

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 118.2 V/m; Power Drift = -0.061 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 83.5 M4	Grid 2 89.3 M4	Grid 3 83.9 M4
Grid 4 84.5 M4	Grid 5 91.7 M4	Grid 6 85.9 M4
Grid 7 83.2 M4	Grid 8 90.5 M4	Grid 9 84.3 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 34 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

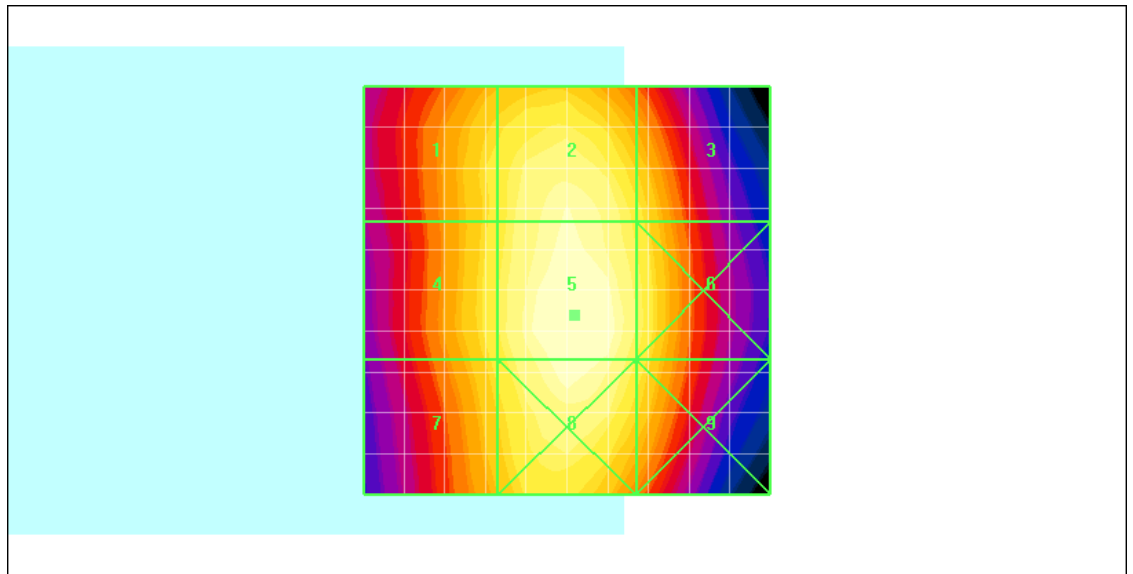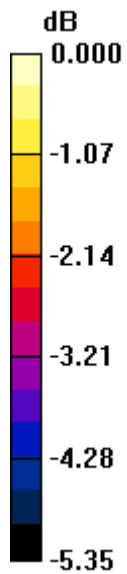

0 dB = 91.7V/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 35 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 6:42:14 PM

Test Laboratory: RIM Testing Services

HAC_E_CDMA_800_low_chan_one_eight

DUT: BlackBerry Smartphone; Type

Communication System: CDMA 800 1/8 th; Frequency: 824.7 MHz;Duty Cycle: 1:8.3

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 42.1 V/m; Power Drift = 0.045 dB

Maximum value of Total (measured) = 34.4 V/m

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 36 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

dx=5mm, dy=5mm

Maximum value of peak Total field = 86.5 V/m

Probe Modulation Factor = 2.53

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 42.1 V/m; Power Drift = 0.045 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 79.6 M4	Grid 2 86.0 M4	Grid 3 73.2 M4
Grid 4 87.5 M4	Grid 5 86.5 M4	Grid 6 75.4 M4
Grid 7 84.2 M4	Grid 8 83.3 M4	Grid 9 74.7 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 37 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

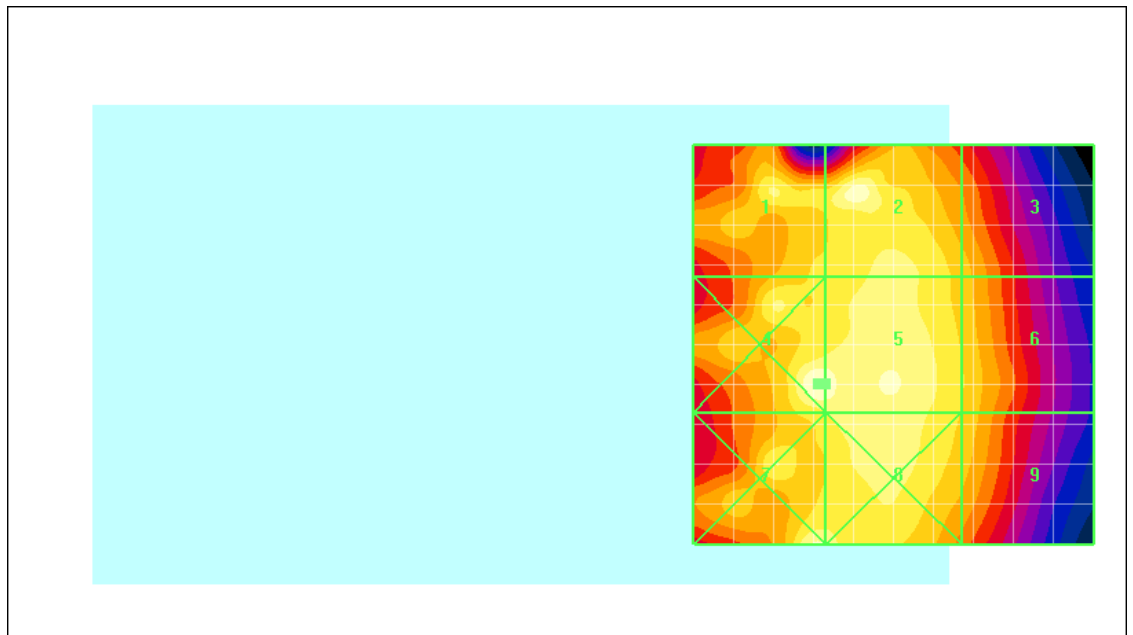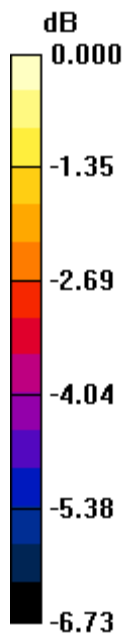

0 dB = 87.5V/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 38 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 7:07:50 PM

Test Laboratory: RIM Testing Services

HAC_E_CDMA_800_low_chan_T_Coil_Center

DUT: BlackBerry Smartphone

Communication System: CDMA 800; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 115.7 V/m; Power Drift = -0.090 dB

Maximum value of Total (measured) = 88.1 V/m

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 39 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 87.8 V/m

Probe Modulation Factor = 1.01

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 115.7 V/m; Power Drift = -0.090 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 82.5 M4	Grid 2 83.2 M4	Grid 3 68.8 M4
Grid 4 86.0 M4	Grid 5 87.8 M4	Grid 6 76.0 M4
Grid 7 87.3 M4	Grid 8 89.1 M4	Grid 9 77.0 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 40 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

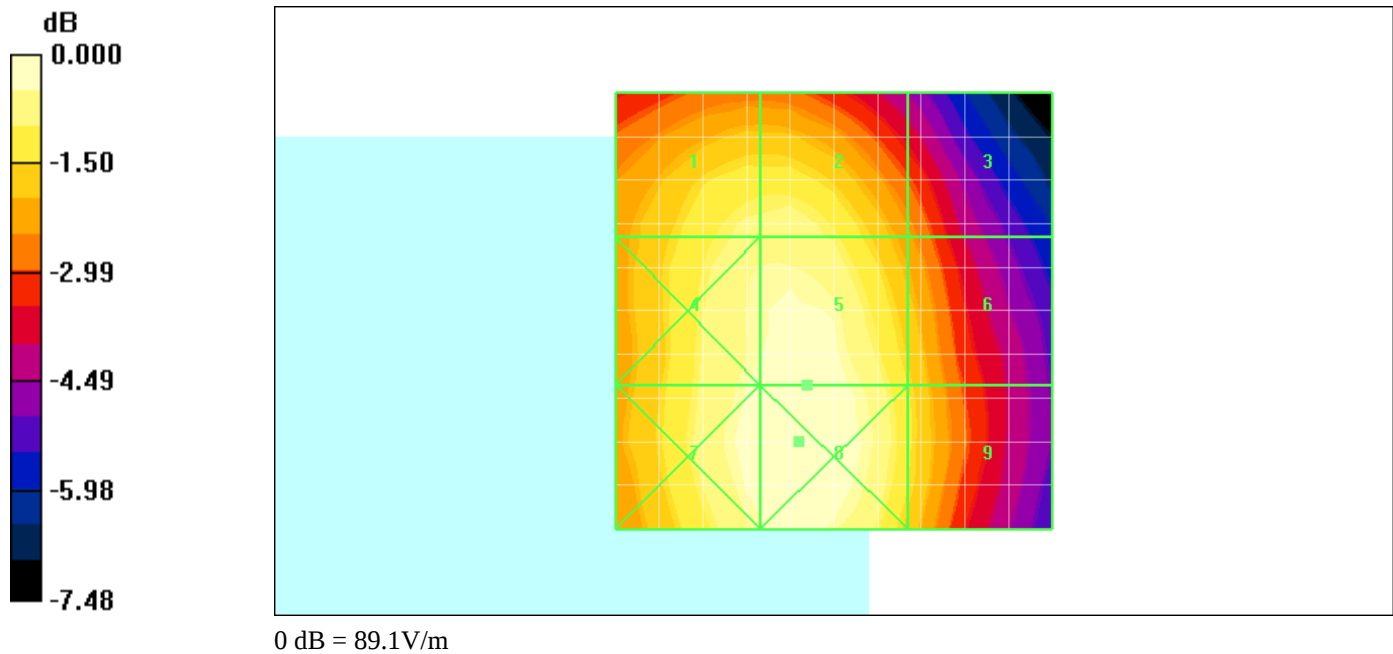

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 41 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 7:14:32 PM

Test Laboratory: RIM Testing Services

HAC_E_CDMA_1900_low_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 50.6 V/m; Power Drift = -0.001 dB

Maximum value of Total (measured) = 53.8 V/m

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 42 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 47.6 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 50.6 V/m; Power Drift = -0.001 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 47.0 M4	Grid 2 53.1 M4	Grid 3 50.7 M4
Grid 4 39.2 M4	Grid 5 47.6 M4	Grid 6 46.1 M4
Grid 7 31.3 M4	Grid 8 32.4 M4	Grid 9 32.2 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 43 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

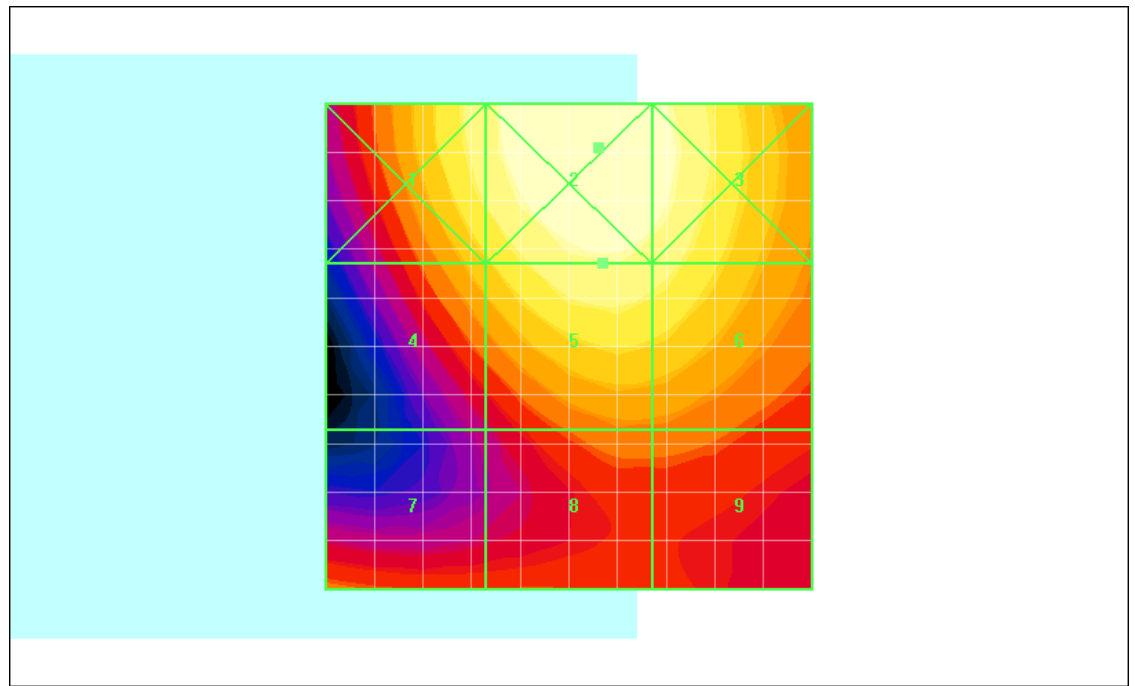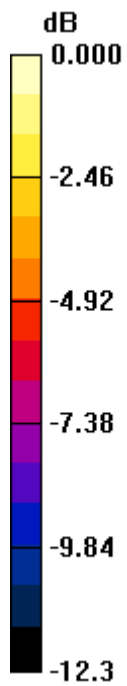

0 dB = 53.1V/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 44 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 7:19:31 PM

Test Laboratory: RIM Testing Services

HAC_E_CDMA_1900_mid_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 31.8 V/m; Power Drift = 0.014 dB

Maximum value of Total (measured) = 37.6 V/m

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 45 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 32.0 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 31.8 V/m; Power Drift = 0.014 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 33.1 M4	Grid 2 37.1 M4	Grid 3 35.2 M4
Grid 4 26.6 M4	Grid 5 32.0 M4	Grid 6 31.4 M4
Grid 7 24.8 M4	Grid 8 25.2 M4	Grid 9 23.7 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 46 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

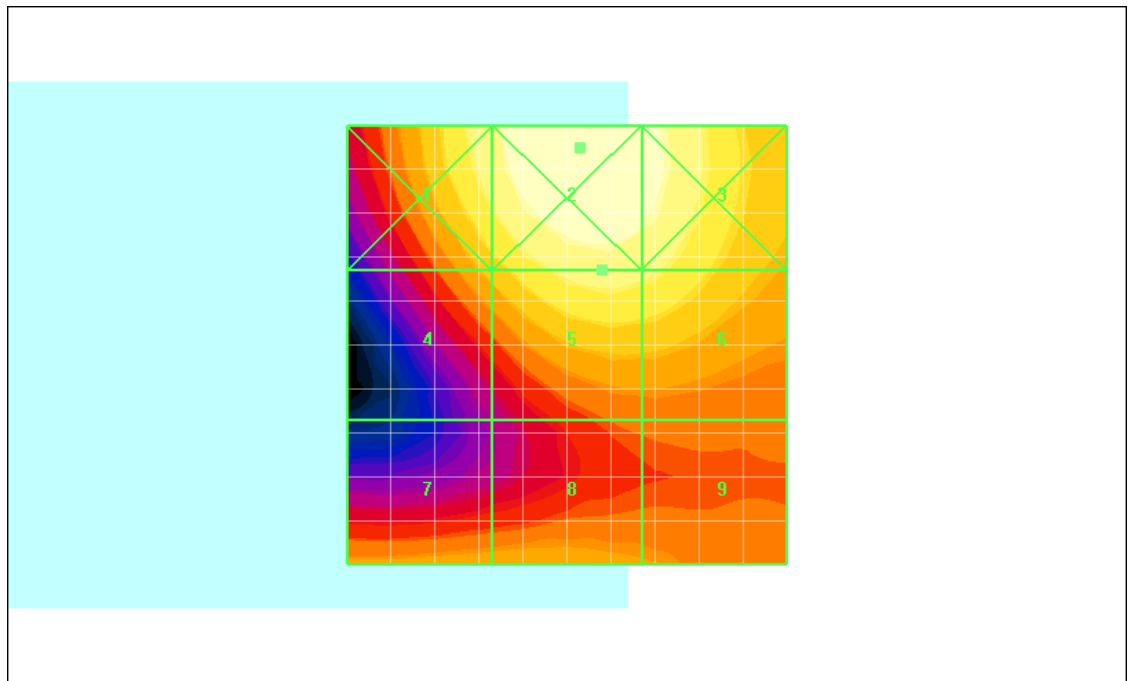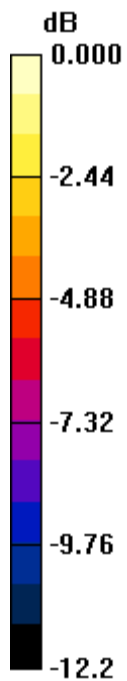

0 dB = 37.1V/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 47 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 7:24:39 PM

Test Laboratory: RIM Testing Services

HAC_E_CDMA_1900_high_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 1900; Frequency: 1908.5 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 29.1 V/m; Power Drift = -0.167 dB

Maximum value of Total (measured) = 34.2 V/m

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 48 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 28.8 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 29.1 V/m; Power Drift = -0.167 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 31.5 M4	Grid 2 33.6 M4	Grid 3 31.6 M4
Grid 4 25.0 M4	Grid 5 28.8 M4	Grid 6 28.1 M4
Grid 7 24.5 M4	Grid 8 25.1 M4	Grid 9 23.1 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 49 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

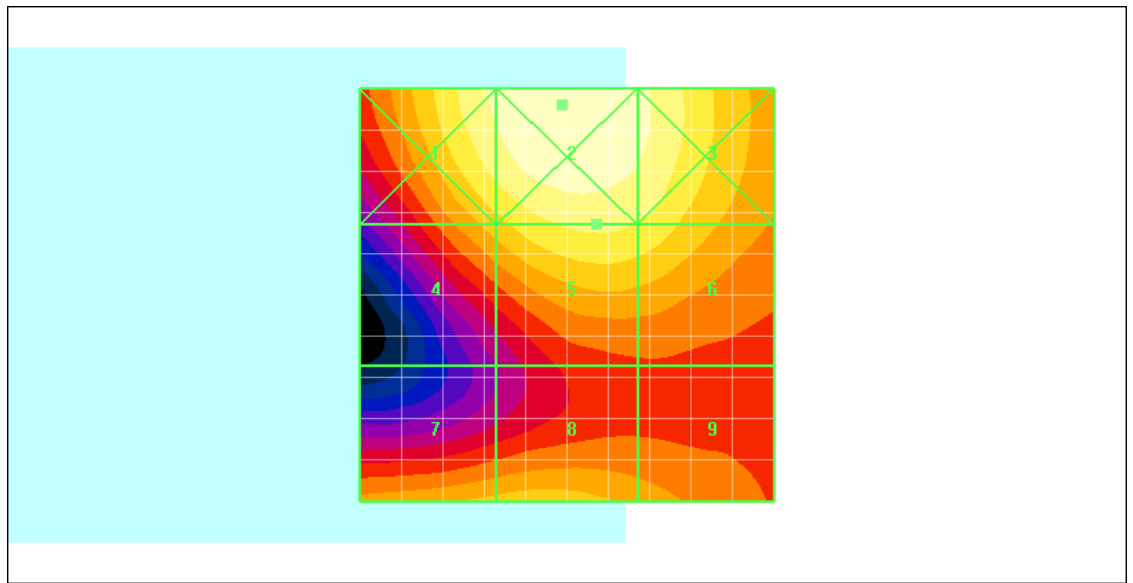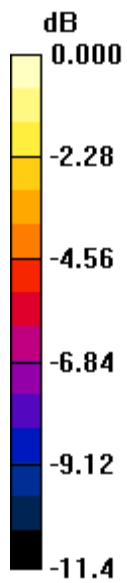

0 dB = 33.6V/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 50 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 7:30:22 PM

Test Laboratory: RIM Testing Services

HAC_E_CDMA_1900_low_chan_one_eighth

DUT: BlackBerry Smartphone

Communication System: CDMA 1900 1/8 th; Frequency: 1851.25 MHz;Duty

Cycle: 1:8.3

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 17.4 V/m; Power Drift = 0.058 dB

Maximum value of Total (measured) = 20.5 V/m

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 51 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

dx=5mm, dy=5mm

Maximum value of peak Total field = 44.1 V/m

Probe Modulation Factor = 2.49

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 17.4 V/m; Power Drift = 0.058 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 46.2 M4	Grid 2 51.2 M4	Grid 3 49.7 M4
Grid 4 34.7 M4	Grid 5 44.1 M4	Grid 6 40.5 M4
Grid 7 31.0 M4	Grid 8 31.1 M4	Grid 9 28.3 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 52 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

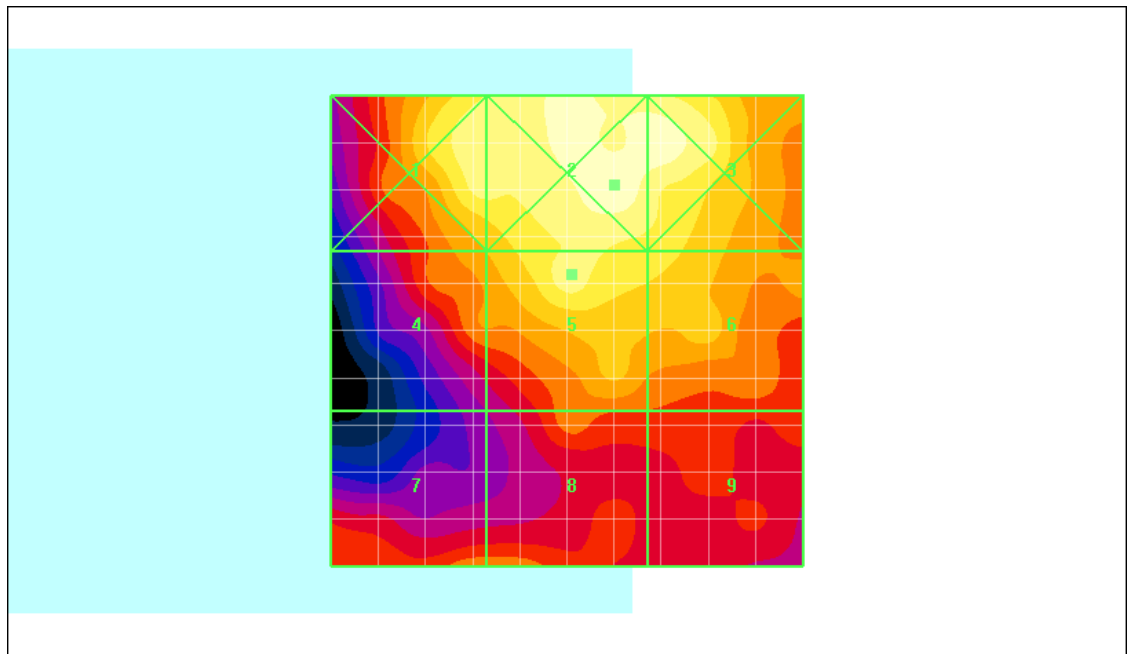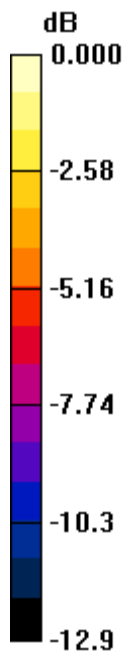

0 dB = 51.2V/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 53 (85)
	Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61
		FCC ID L6ARCL20CW	

Date/Time: 8/16/2010 7:36:26 PM

Test Laboratory: RIM Testing Services

HAC_E_CDMA_1900_low_chan_T_Coil_Center

DUT: BlackBerry Smartphone

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 49.1 V/m; Power Drift = 0.029 dB

Maximum value of Total (measured) = 53.0 V/m

E Scan - ER3D - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 54 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 51.8 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 49.1 V/m; Power Drift = 0.029 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1 49.6 M4	Grid 2 52.2 M4	Grid 3 47.1 M4
Grid 4 48.7 M4	Grid 5 51.8 M4	Grid 6 47.1 M4
Grid 7 35.2 M4	Grid 8 41.0 M4	Grid 9 38.9 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 55 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

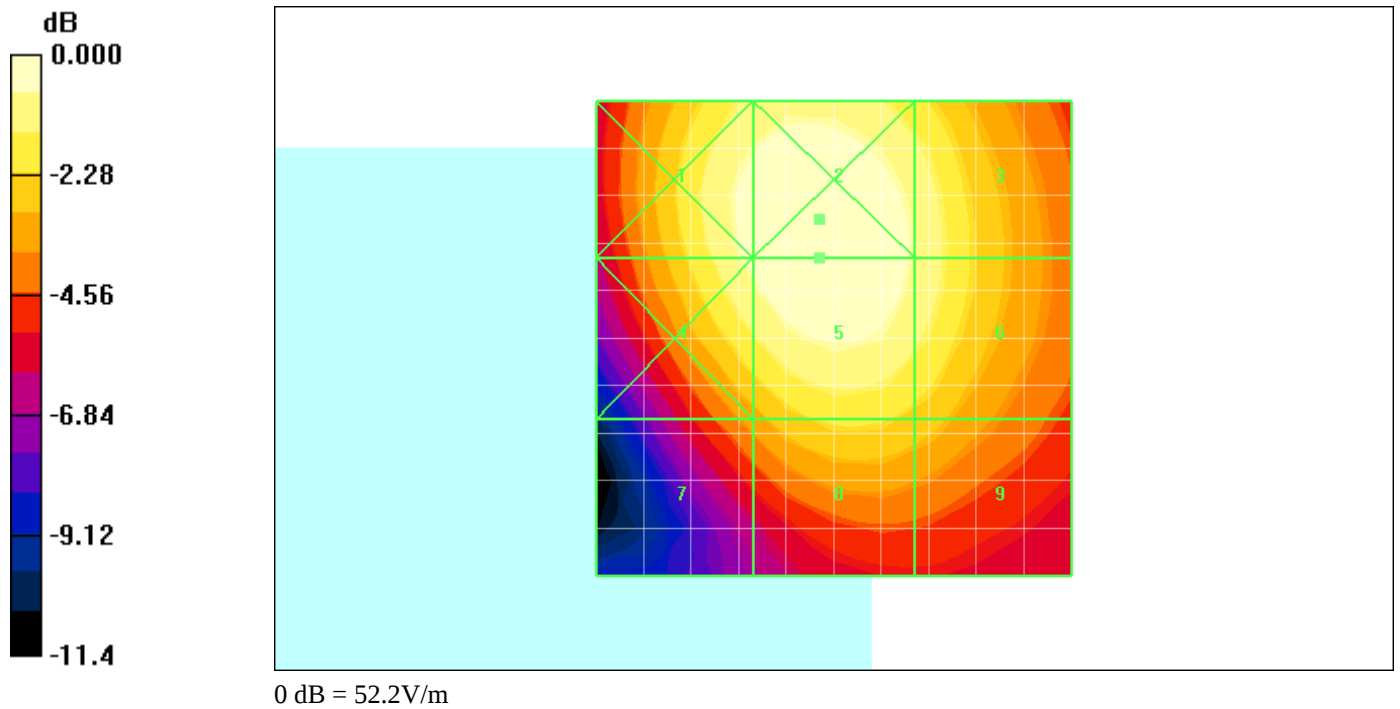

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 56 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 11:40:45 PM

Test Laboratory: RIM Testing Services

HAC_H_CDMA_800_low_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 800; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.086 A/m; Power Drift = -0.088 dB

Maximum value of Total (measured) = 0.177 A/m

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 57 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 0.125 A/m

Probe Modulation Factor = 1.01

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 0.086 A/m; Power Drift = -0.088 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.179 M4	Grid 2 0.125 M4	Grid 3 0.074 M4
Grid 4 0.167 M4	Grid 5 0.115 M4	Grid 6 0.066 M4
Grid 7 0.178 M4	Grid 8 0.122 M4	Grid 9 0.071 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 58 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

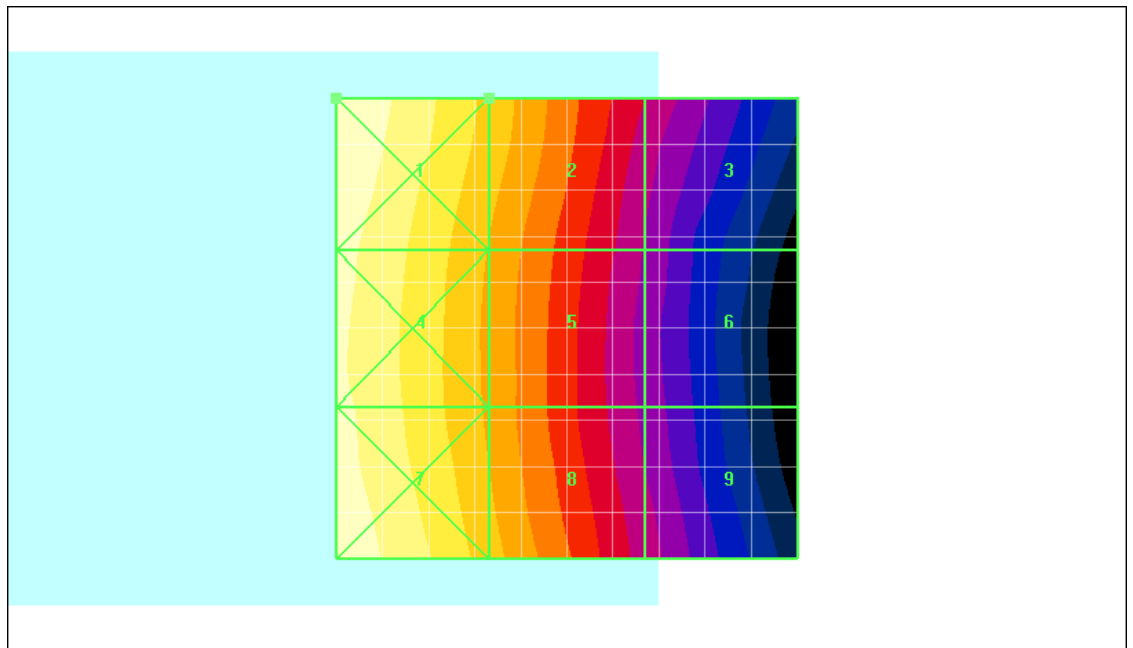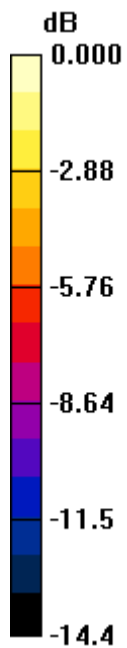

0 dB = 0.179A/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 59 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 11:45:57 PM

Test Laboratory: RIM Testing Services

HAC_H_CDMA_800_mid_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.082 A/m; Power Drift = 0.034 dB

Maximum value of Total (measured) = 0.163 A/m

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 60 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 0.165 A/m

Probe Modulation Factor = 1.01

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 0.082 A/m; Power Drift = 0.034 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.165 M4	Grid 2 0.117 M4	Grid 3 0.073 M4
Grid 4 0.151 M4	Grid 5 0.107 M4	Grid 6 0.064 M4
Grid 7 0.160 M4	Grid 8 0.111 M4	Grid 9 0.066 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 61 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

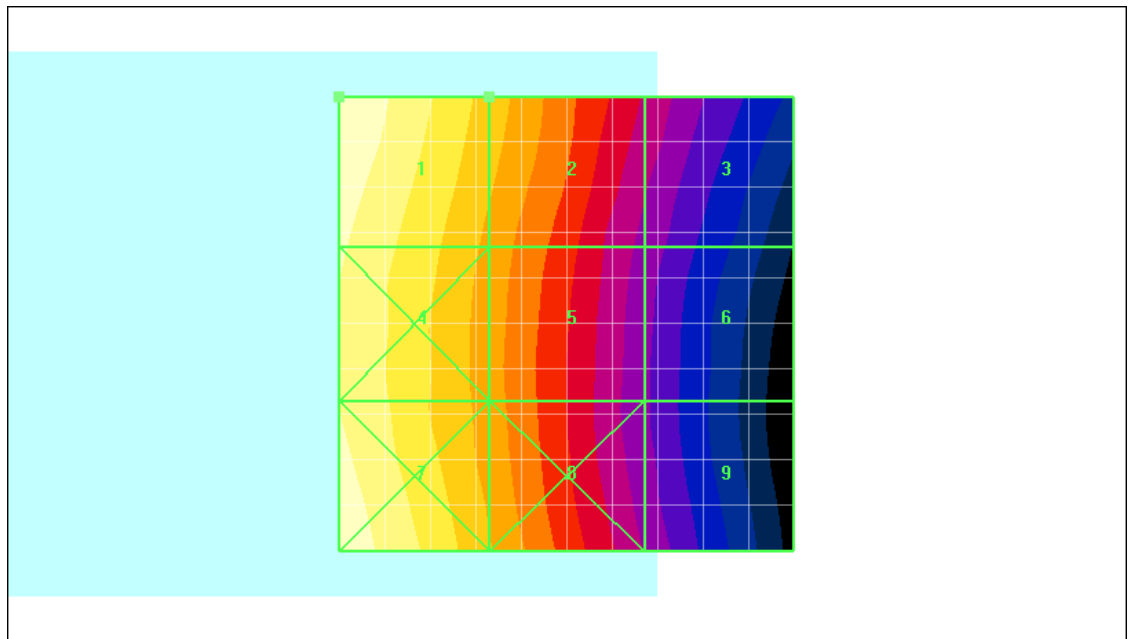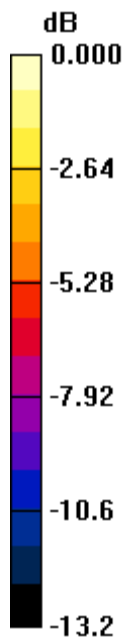

0 dB = 0.165A/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 62 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 11:52:26 PM

Test Laboratory: RIM Testing Services

HAC_H_CDMA_800_high_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 800; Frequency: 848.52 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.098 A/m; Power Drift = 0.262 dB

Maximum value of Total (measured) = 0.191 A/m

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 63 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 0.180 A/m

Probe Modulation Factor = 1.01

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 0.098 A/m; Power Drift = 0.262 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.180 M4	Grid 2 0.128 M4	Grid 3 0.080 M4
Grid 4 0.175 M4	Grid 5 0.126 M4	Grid 6 0.081 M4
Grid 7 0.193 M4	Grid 8 0.139 M4	Grid 9 0.090 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 64 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

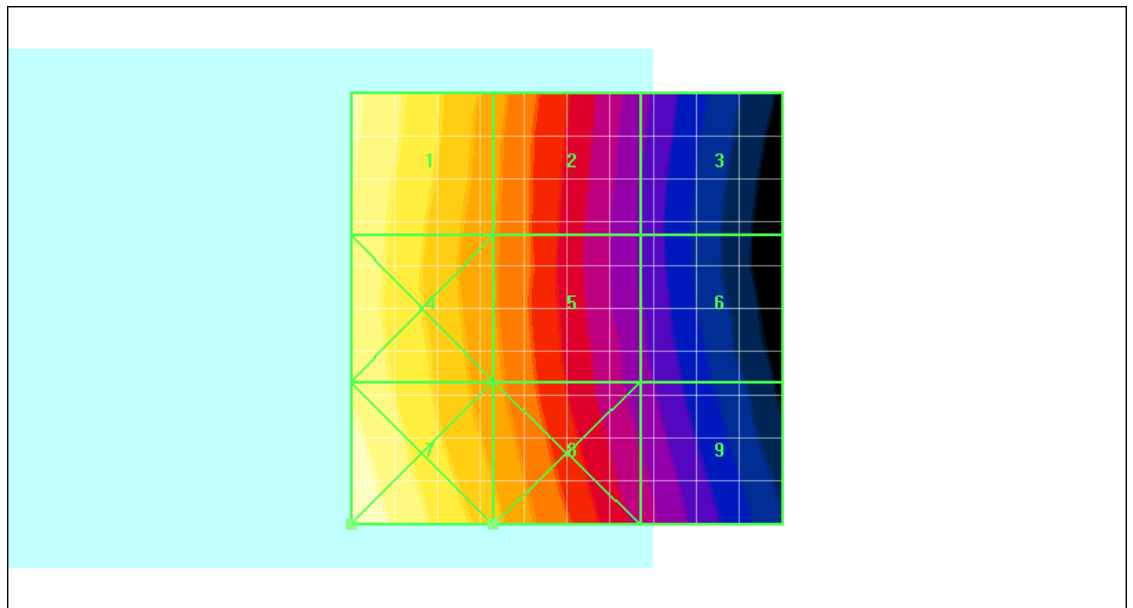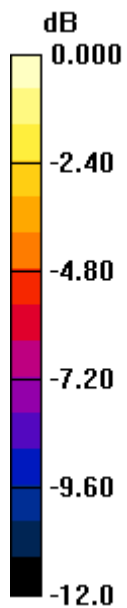

0 dB = 0.193A/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 65 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 11:57:58 PM

Test Laboratory: RIM Testing Services

HAC_H_CDMA_800_high_chan_one_eighth

DUT: BlackBerry Smartphone

Communication System: CDMA 800 1/8 th; Frequency: 848.52 MHz;Duty Cycle: 1:8.3

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.036 A/m; Power Drift = 0.106 dB

Maximum value of Total (measured) = 0.068 A/m

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 66 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.124 A/m

Probe Modulation Factor = 2.46

Device Reference Point: 0.000, 0.000, -6.30 mm



Reference Value = 0.036 A/m; Power Drift = 0.106 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.162 M4	Grid 2 0.122 M4	Grid 3 0.077 M4
Grid 4 0.155 M4	Grid 5 0.122 M4	Grid 6 0.072 M4
Grid 7 0.168 M4	Grid 8 0.124 M4	Grid 9 0.082 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 67 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

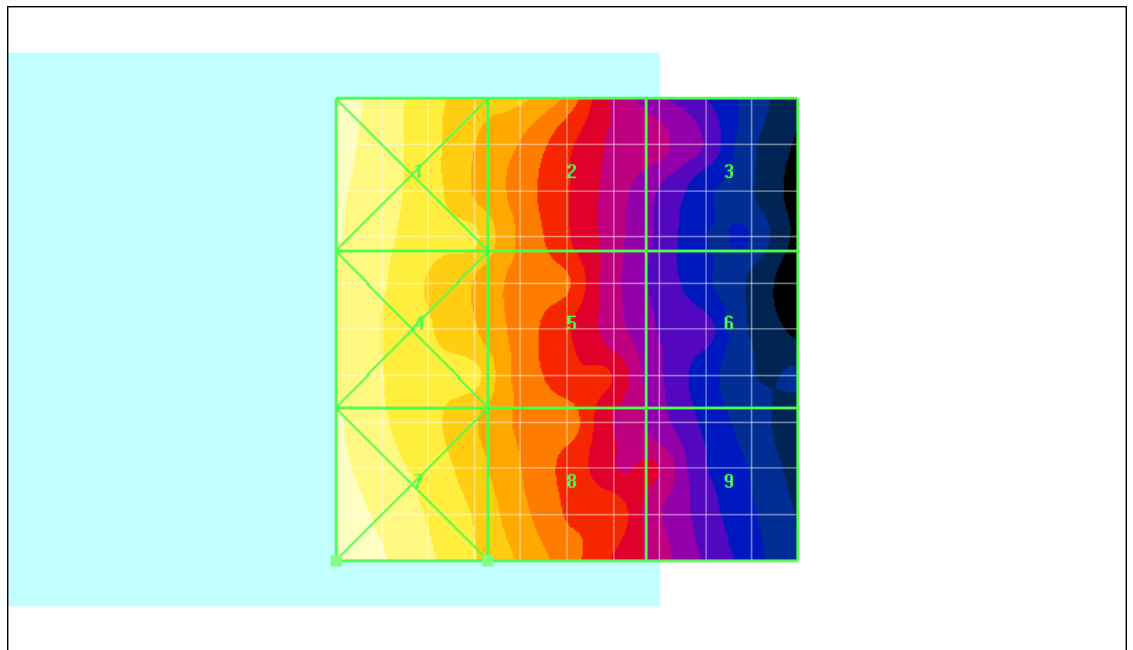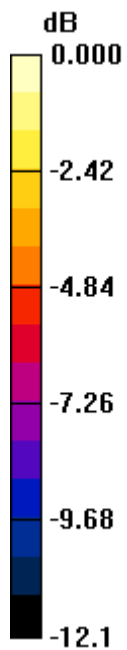

0 dB = 0.168A/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 68 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/17/2010 12:04:29 AM

Test Laboratory: RIM Testing Services

HAC_H_CDMA_800_high_chan_T_Coil_Canter

DUT: BlackBerry Smartphone

Communication System: CDMA 800; Frequency: 848.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.100 A/m; Power Drift = -0.028 dB

Maximum value of Total (measured) = 0.171 A/m

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 69 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 0.120 A/m

Probe Modulation Factor = 1.01

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.100 A/m; Power Drift = -0.028 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.173 M4	Grid 2 0.120 M4	Grid 3 0.076 M4
Grid 4 0.171 M4	Grid 5 0.118 M4	Grid 6 0.072 M4
Grid 7 0.171 M4	Grid 8 0.120 M4	Grid 9 0.077 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 70 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

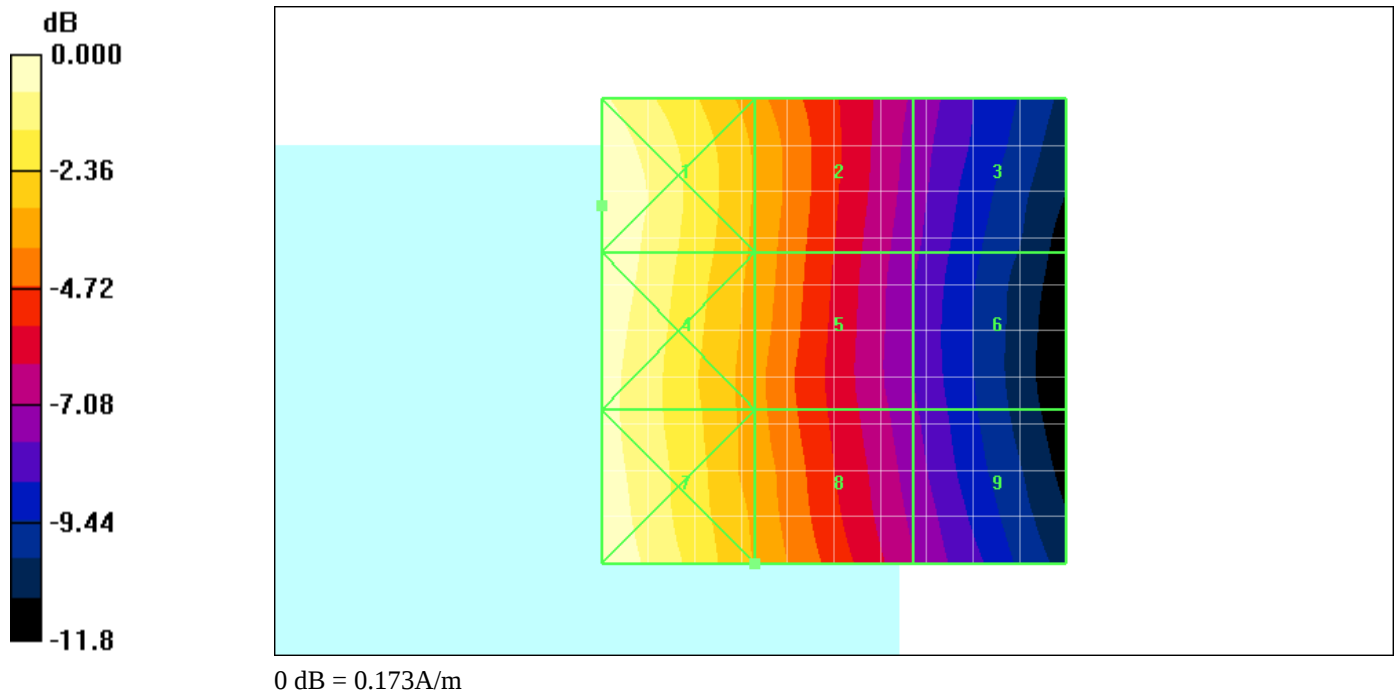

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 71 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 7:45:23 PM

Test Laboratory: RIM Testing Services

HAC_H_CDMA_1900_low_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.125 A/m; Power Drift = -0.073 dB

Maximum value of Total (measured) = 0.144 A/m

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 72 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 0.112 A/m

Probe Modulation Factor = 0.960

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.125 A/m; Power Drift = -0.073 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.138 M4	Grid 2 0.106 M4	Grid 3 0.085 M4
Grid 4 0.108 M4	Grid 5 0.111 M4	Grid 6 0.106 M4
Grid 7 0.109 M4	Grid 8 0.112 M4	Grid 9 0.108 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 73 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

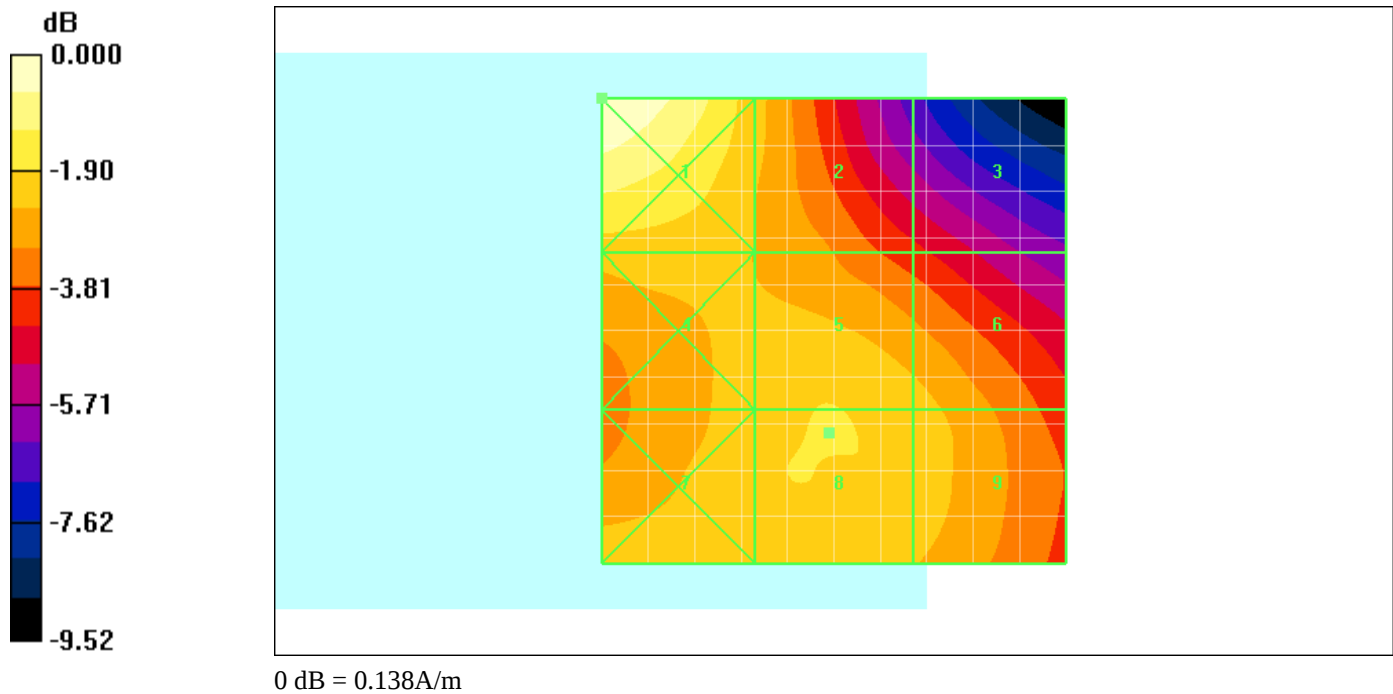

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 74 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 7:51:44 PM

Test Laboratory: RIM Testing Services

HAC_H_CDMA_1900_mid_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.096 A/m; Power Drift = 0.044 dB

Maximum value of Total (measured) = 0.097 A/m

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 75 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 0.086 A/m

Probe Modulation Factor = 0.960

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.096 A/m; Power Drift = 0.044 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.093 M4	Grid 2 0.073 M4	Grid 3 0.069 M4
Grid 4 0.080 M4	Grid 5 0.086 M4	Grid 6 0.083 M4
Grid 7 0.089 M4	Grid 8 0.086 M4	Grid 9 0.084 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 76 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

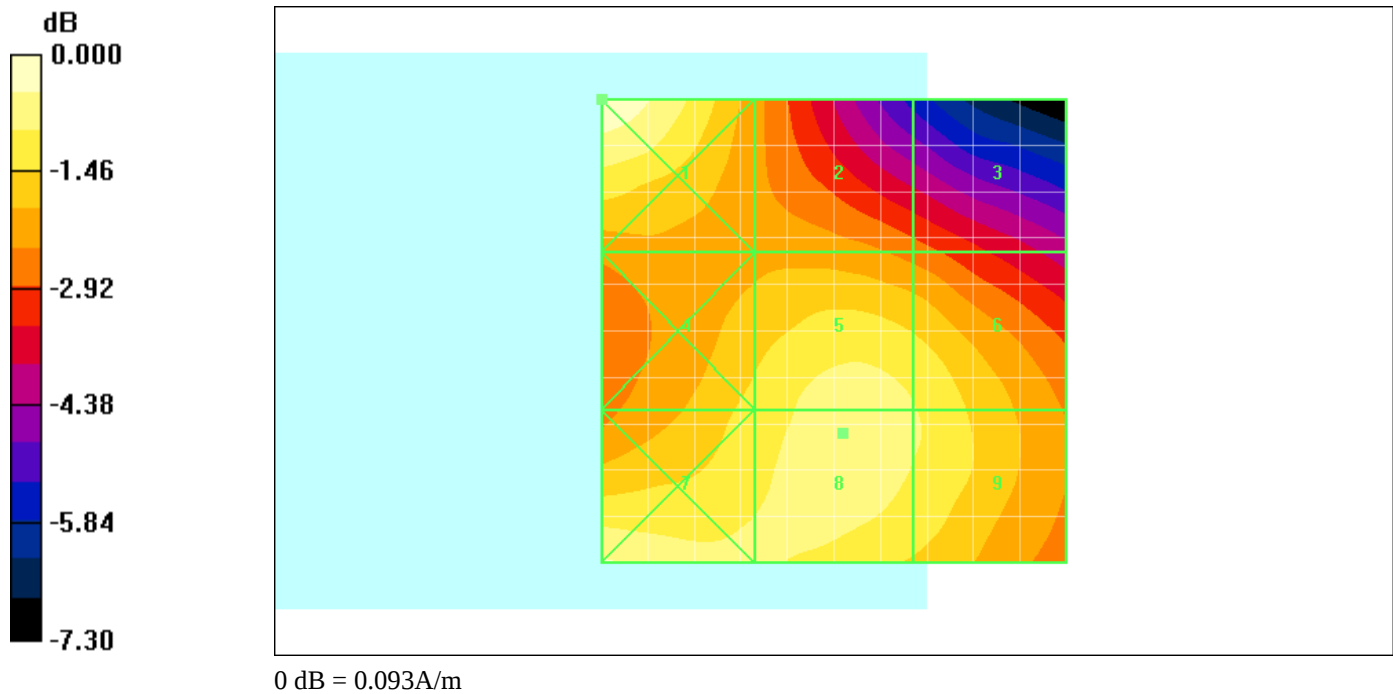

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 77 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 7:56:41 PM

Test Laboratory: RIM Testing Services

HAC_H_CDMA_1900_high_chan

DUT: BlackBerry Smartphone

Communication System: CDMA 1900; Frequency: 1908.5 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.091 A/m; Power Drift = 0.246 dB

Maximum value of Total (measured) = 0.093 A/m

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 78 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 0.081 A/m

Probe Modulation Factor = 0.960

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.091 A/m; Power Drift = 0.246 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.088 M4	Grid 2 0.071 M4	Grid 3 0.062 M4
Grid 4 0.079 M4	Grid 5 0.080 M4	Grid 6 0.075 M4
Grid 7 0.090 M4	Grid 8 0.081 M4	Grid 9 0.075 M4

Author Data
Daoud Attayi

Dates of Test
Aug. 11-16, Sep 09, 2010

Report No
RTS-2068-1008-61

FCC ID
L6ARCL20CW

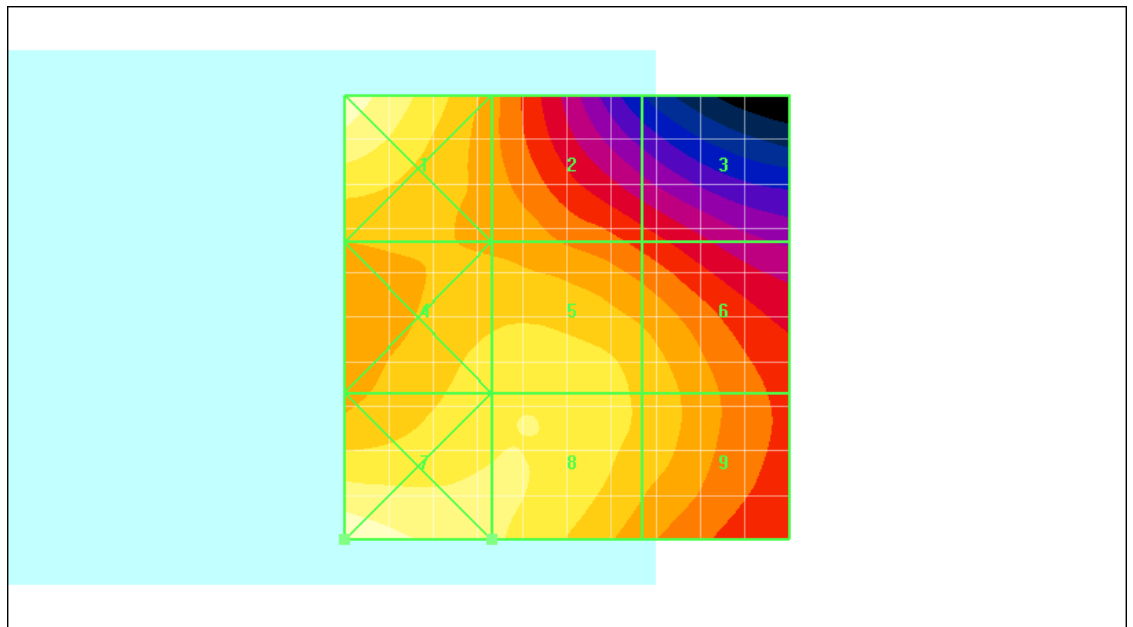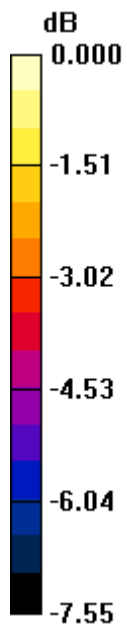

0 dB = 0.090A/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 80 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 8:01:54 PM

Test Laboratory: RIM Testing Services

HAC_H_CDMA_1900_low_chan_one_eighth

DUT: BlackBerry Smartphone

Communication System: CDMA 1900 1/8th; Frequency: 1851.25 MHz;Duty

Cycle: 1:8.3

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.043 A/m; Power Drift = 0.012 dB

Maximum value of Total (measured) = 0.052 A/m

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 81 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

Maximum value of peak Total field = 0.109 A/m

Probe Modulation Factor = 2.32

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.043 A/m; Power Drift = 0.012 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak H-field in A/m



Grid 1 0.122 M4	Grid 2 0.102 M4	Grid 3 0.074 M4
Grid 4 0.105 M4	Grid 5 0.104 M4	Grid 6 0.093 M4
Grid 7 0.108 M4	Grid 8 0.109 M4	Grid 9 0.094 M4

Author Data
Daoud Attayi

Dates of Test
Aug. 11-16, Sep 09, 2010

Report No
RTS-2068-1008-61

FCC ID
L6ARCL20CW

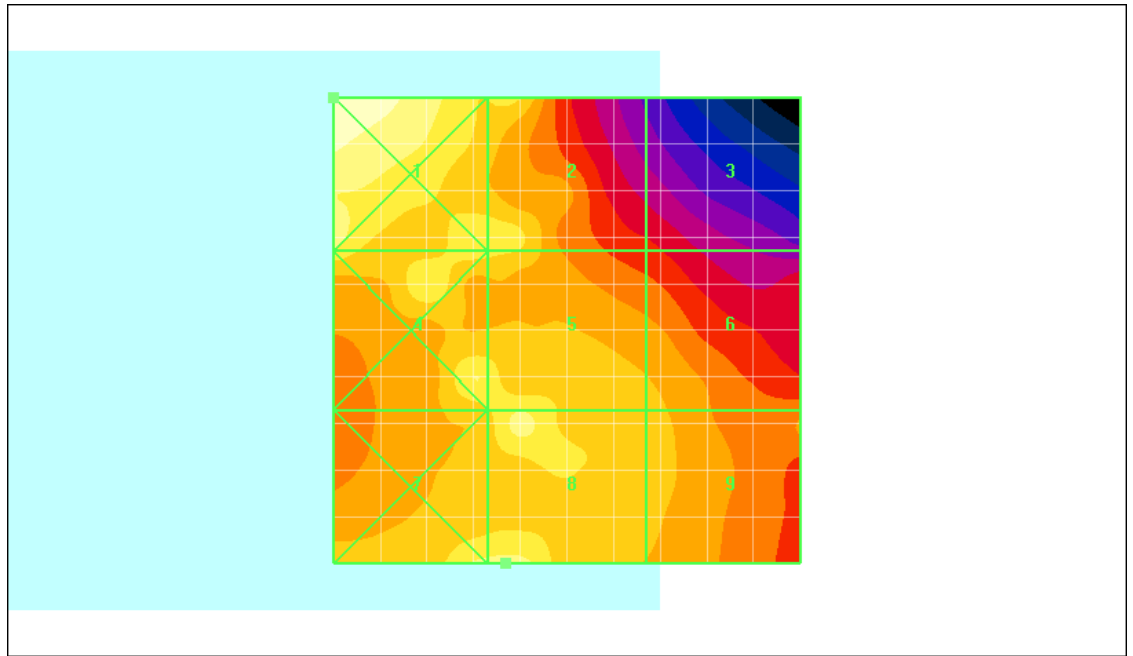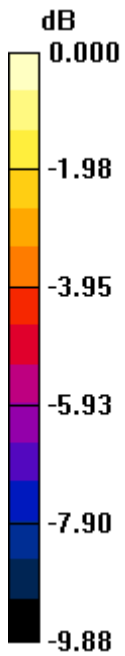

0 dB = 0.122A/m

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 83 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Date/Time: 8/16/2010 8:08:01 PM

Test Laboratory: RIM Testing Services

HAC_H_CDMA_1900_low_chan_T_Coil_Center

DUT: BlackBerry Smartphone

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6168; ; Calibrated: 3/12/2010
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (11x11x1): Measurement grid:

dx=5mm, dy=5mm

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.124 A/m; Power Drift = 0.029 dB

Maximum value of Total (measured) = 0.143 A/m

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the

Device/Hearing Aid Compatibility Test (101x101x1): Measurement grid:

dx=5mm, dy=5mm

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 84 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

Maximum value of peak Total field = 0.113 A/m

Probe Modulation Factor = 0.960

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.124 A/m; Power Drift = 0.029 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1 0.138 M4	Grid 2 0.100 M4	Grid 3 0.066 M4
Grid 4 0.126 M4	Grid 5 0.105 M4	Grid 6 0.092 M4
Grid 7 0.111 M4	Grid 8 0.113 M4	Grid 9 0.105 M4

	Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RCL22CW		Page 85 (85)
Author Data Daoud Attayi	Dates of Test Aug. 11-16, Sep 09, 2010	Report No RTS-2068-1008-61	FCC ID L6ARCL20CW

