Dynamic Frequency Selection (DFS) Test Report

AIR-CAP3702P-B-K9

FCC ID: LDK102087P

Also covers:
AIR-SAP3702P-B-K9

5250-5350, 5470-5725 MHz

Against the following Specifications:

CFR47 Part 15.407

RSS247

Cisco Systems
170 West Tasman Drive
San Jose, CA 95134

	
Author: Jose Aguirre **Tested By**	**Approved By:** Jim Nicolson **Title:** Technical Leader, Engineering **Revision:** 2

This report replaces any previously entered test report under EDCS – **1245885**.This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407 RSS-247

RSS-247 section A9.3a allows the use of applicable FCC KDBs
Measurements were made in accordance with

- KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r02

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.

b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.

c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).

d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

e) All AC testing was performed at one or more of the following supply voltages:
110V 60 Hz (+/-20%)

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

Emission level [dBuV] = Indicated voltage level [dBuV] + Cable Loss [dB] + Other correction factors [dB]

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

Level in uV/m = Common Antilogarithm [(X dBuV/m)/20] = Y uV/m

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10-7
temperature measurements	± 0.54º
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

2.2 Date of testing

02-December-15

2.3 Report Issue Date

10-December-2015

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,
125 West Tasman Drive
San Jose, CA 95134, USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1

Test Engineers

Jose Aguirre

2.5 Equipment Assessed (EUT)

AIR-CAP3702y-B-K9

Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407 RSS-247	Dynamic Frequency Selection (DFS) Detection Threshold	Pass
FCC 15.407 RSS-247	Channel Availability Check Time	Pass
FCC 15.407 RSS-247	Channel Move Time	Pass
FCC 15.407 RSS-247	Channel Closing Time	Pass
FCC 15.407 RSS-247	Non-Occupancy Period	Pass
FCC 15.407 RSS-247	U-NII Detection Bandwidth	Pass

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardwar Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP3702y-B-K9	Cisco Systems	P2	15.3	AP3G2-K9W7-M	FTX1850R0FC
S02	AIR-PWR-C	Meanwell	A0	NA	NA	EB46E93226
S03	AIR-CAP3702y-B-K9	Cisco Systems	P2	15.3	AP3G2-K9W7-M	FTW1906NUYD

4.2 System Details

System Number	Description	Samples	System under test	Support equipment
1	AIR-CAP3702y-B-K9	S01	☑	☐
	Support Power Supply	S02	☐	☑
	Support Client Equipment	S03	☐	☑

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting

All measurements were made in accordance with

- KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r02

Appendix A: Dynamic Frequency Selection (DFS)

15.407: U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

U-NII devices operating in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

A.1 UNII Device Description

1. The AIR-CAP3702y-B-K9 Cisco Aironet 802.11ac Module operates in the following bands:
   a. 5150-5250 MHz
   b. 5250-5350 MHz
   c. 5470-5725 MHz
   d. 5725-5850 MHz

2. The maximum EIRP of the 5GHz equipment is 29 dBm, and the minimum possible EIRP is 10 dBm.

   Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -63 dBm threshold level (-64dBm +1 dB) during calibration of the test setup.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)	Antenna Gain >30 degrees (dBi)
2.4/5 GHz	AIR-ANT2524DB-R	Dual-resonant black dipole	2 / 4	NA
	AIR-ANT2524DW-R	Dual-resonant white dipole	2 / 4	NA
	AIR-ANT2524DG-R	Dual-resonant gray dipole	2 / 4	NA
	AIR-ANT2524V4C-R	Dual-resonant ceiling mount omni (4-pack)	2 / 4	NA
	AIR-ANT2544V4M-R8	Dual-resonant omni (4-pack)	3 / 2	1
	AIR-ANT2544V4M-R	Dual-resonant omni (4-pack)	4 / 4	1
	AIR-ANT2566P4W-R	Dual-resonant "directional" antenna (4-pack)	6 / 6	3
	AIR-ANT2566D4M-R	Dual-Band Polarization-Diverse Directional Array	6 / 6	3
	AIR-ANT2547V-N	Dual Band Omni	4 / 7	-7
	AIR-ANT2513P4M-N	Dual-resonant cross-pol "directional" antenna (4-pack)	13 / 13	-7

3. System testing was performed with the designated MPEG test file that streams full motion video at 30 frames per second from the Master to the Client IP based system.

4. The Master requires 106.5 seconds to complete its power-on cycle.

5. Information regarding the parameters of the detected Radar Waveforms is not available to the end user.

6. For the 5250-5350 MHz and 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

A.2 DFS Detection Thresholds

1. **Interference Threshold values, Master or Client incorporating In-Service Monitoring**

Maximum Transmit Power	**Value (See Notes 1, 2, and 3)**
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. **Note 2:** Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. **Note3:** EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

2. **DFS Response requirement values**

Parameter	**Value**
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short Pulse Radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required 905642 UNII DFS DR01-41759 Page 11 to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, any one of radar types 0 - 4 can be used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic. The 99% power bandwidth is measured with 100 kHz resolution bandwidth.

A.3 Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

1. Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Numbers of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360}\right) \cdot \left(\frac{19 \cdot 10^6}{\mathrm{PRI}_{\mu\mathrm{sec}}}\right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 shall only be used for the channel availability and detection bandwidth tests. It should be noted that any of the radar test waveforms 0 – 4 can be used for the channel availability and detection bandwidth tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 µsec is selected, the number of pulses would be $\text{Roundup}\left\{\left(\frac{1}{360}\right)\cdot\left(\frac{19\cdot10^6}{3066}\right)\right\} = \text{Roundup}\{17.2\} = 18$

Table 5a – Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355.0	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139.0	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate (82.9% + 60% + 90% + 88%)/4 = 80.2%			

2. Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per *Burst*	Number of *Bursts*	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000- 2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length (12,000,000 / Burst_Count) microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and [(12,000,000 / Burst_Count) – (Total Burst Length) + (One Random PRI Interval)] microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

1) The total test signal length is 12 seconds.
2) 8 Bursts are randomly generated for the Burst_Count.
3) Burst 1 has 2 randomly generated pulses.
4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
5) The PRI is randomly selected to be at 1213 microseconds.
6) Bursts 2 through 8 are generated using steps 3 – 5.
7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical Representation of a Long Pulse radar Test Waveform

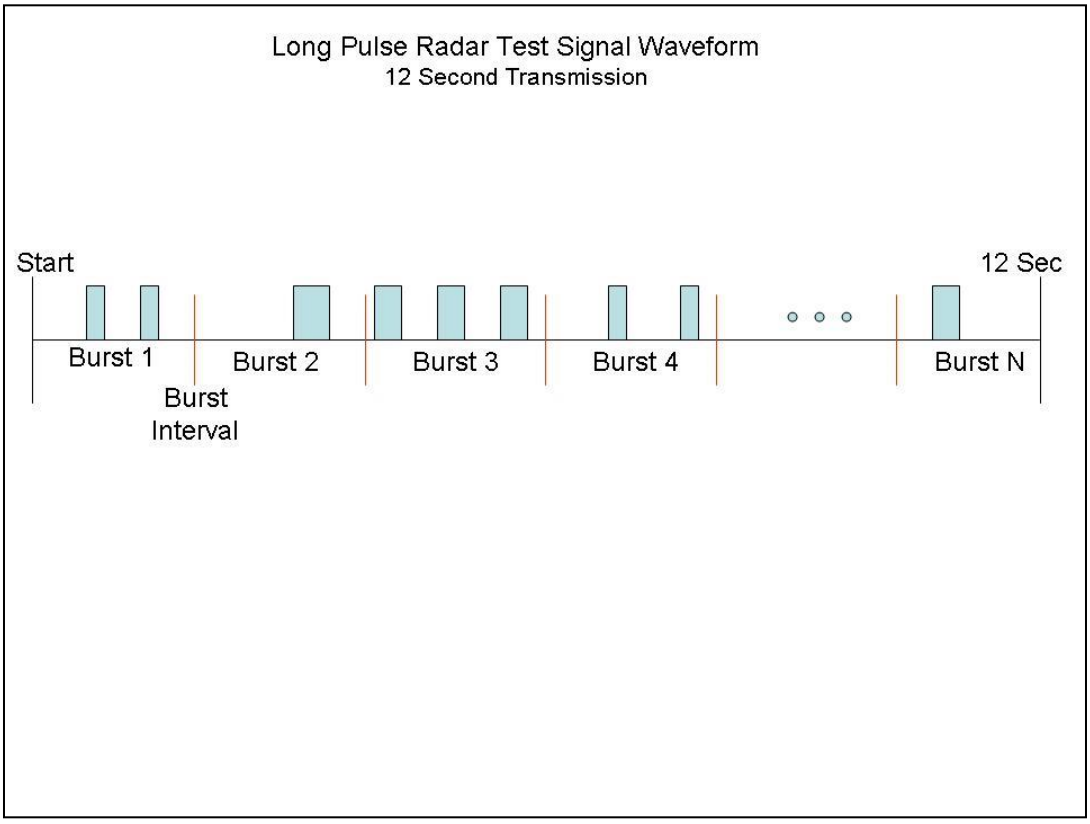

3. Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected[1] from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

Appendix B: Dynamic Frequency Selection / Test Results

Standards Reference:
FCC 15.407 / RSS-247

Test Procedure

Ref. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r02

Test parameters
Span = 0 Hz RBW ≥ 3 MHz VBW ≥ 3 MHz Detector = Peak Trace = Single Sweep

System Number	Description	Samples	System under test	Support equipment
1	AIR-CAP3702y-B-K9	S01	☑	☐
	Support Power Supply	S02	☐	☑
	Support Client Equipment	S03	☐	☑

Tested By :	**Date of testing:**
Jose Aguirre	02-December-15
Test Result : PASS	

See Appendix C for list of test equipment

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.

The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -63dBm.

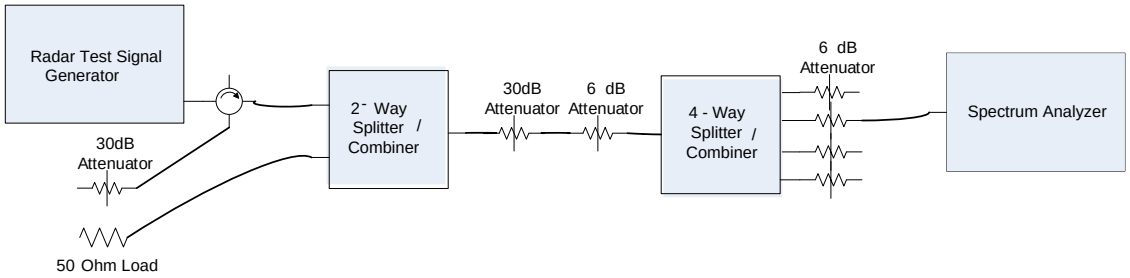

Conducted Calibration Setup

Following are the calibration plots for each of the required radar waveforms.

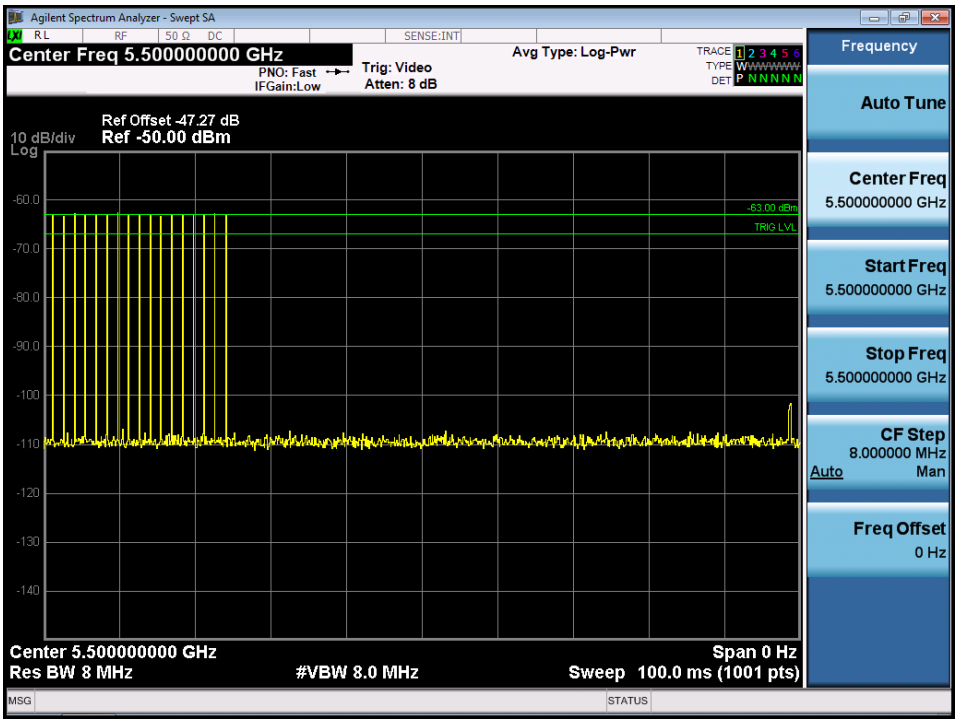

USA Bin 0 Radar Calibration

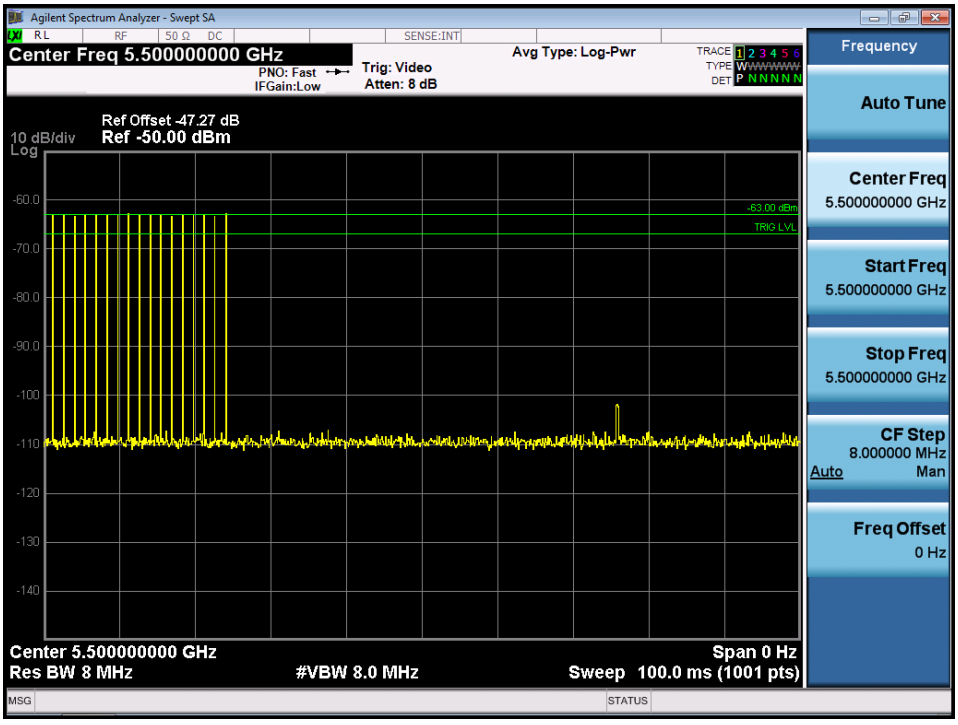

USA Bin 1A Radar Calibration

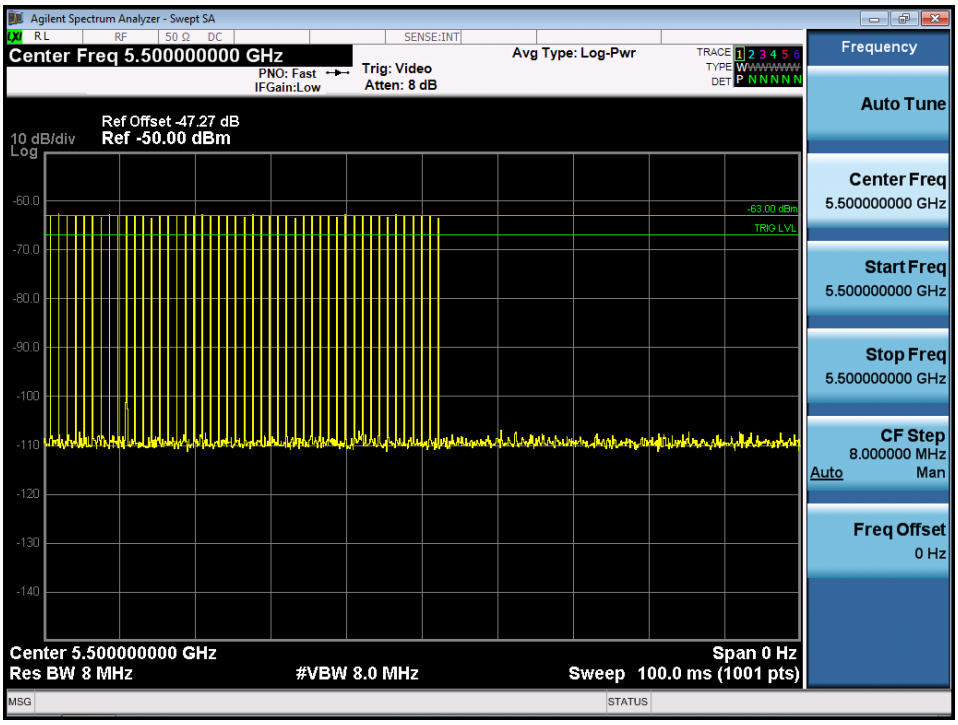

USA Bin 1B Radar Calibration

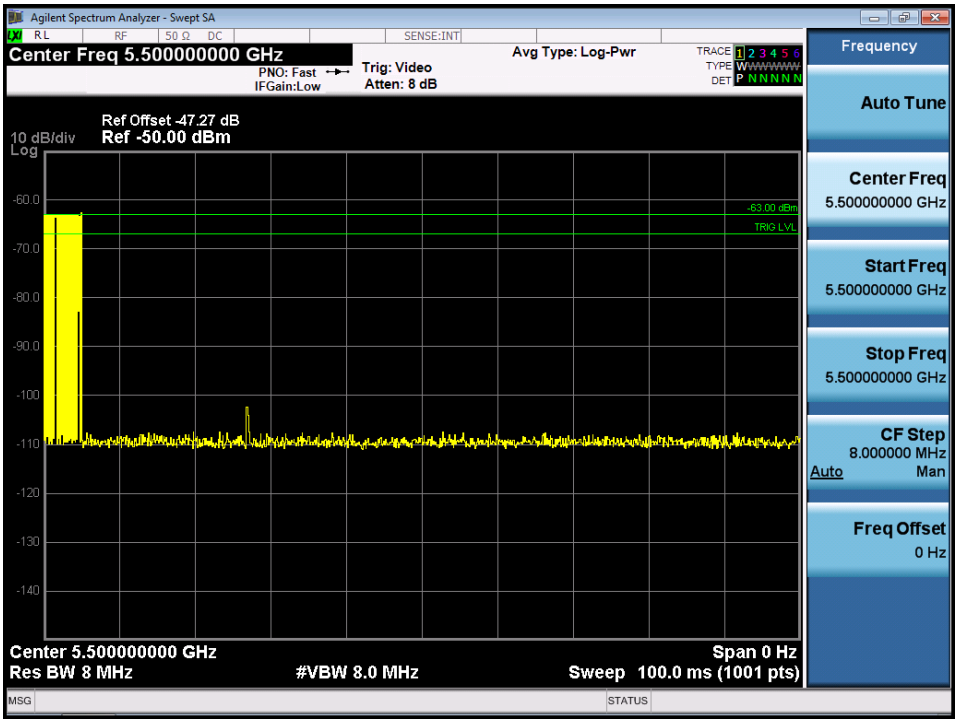

USA Bin 2 Radar Calibration

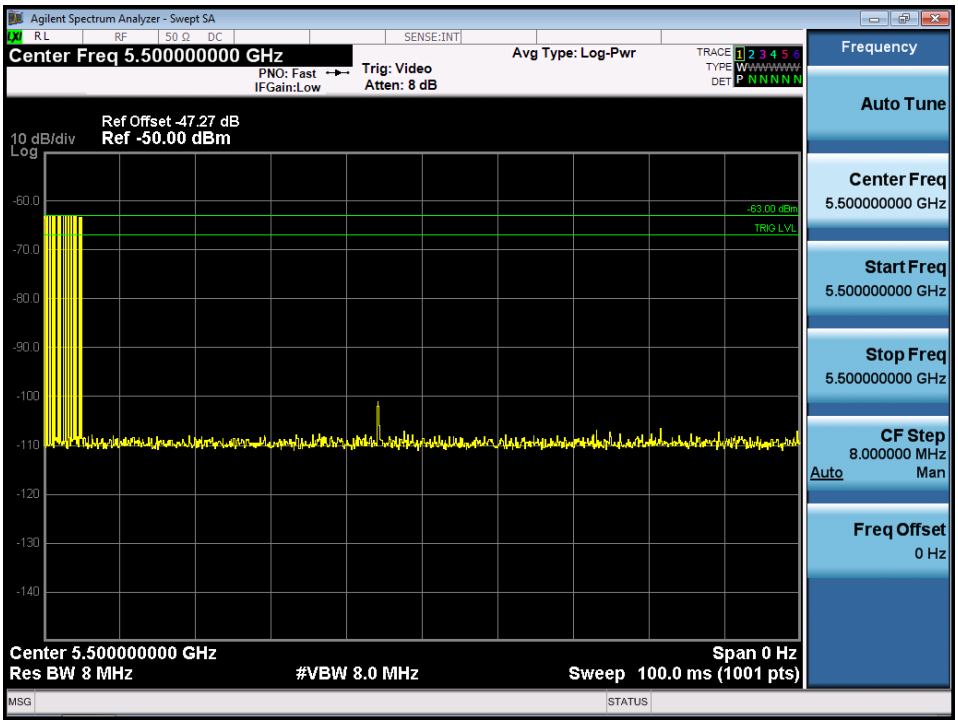

USA Bin 3 Radar Calibration

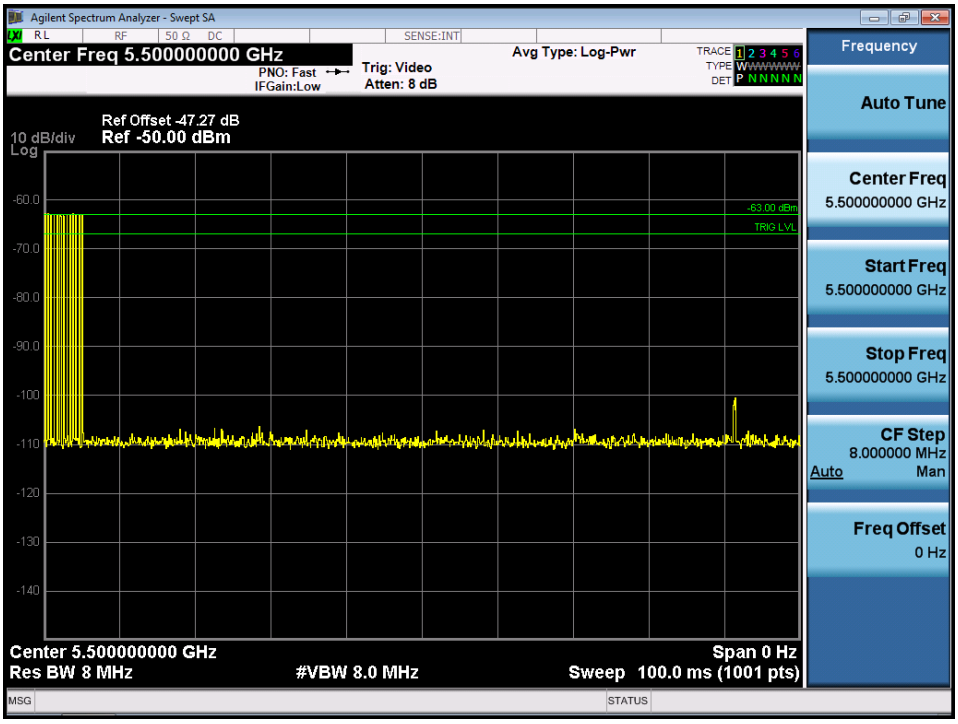

USA Bin 4 Radar Calibration

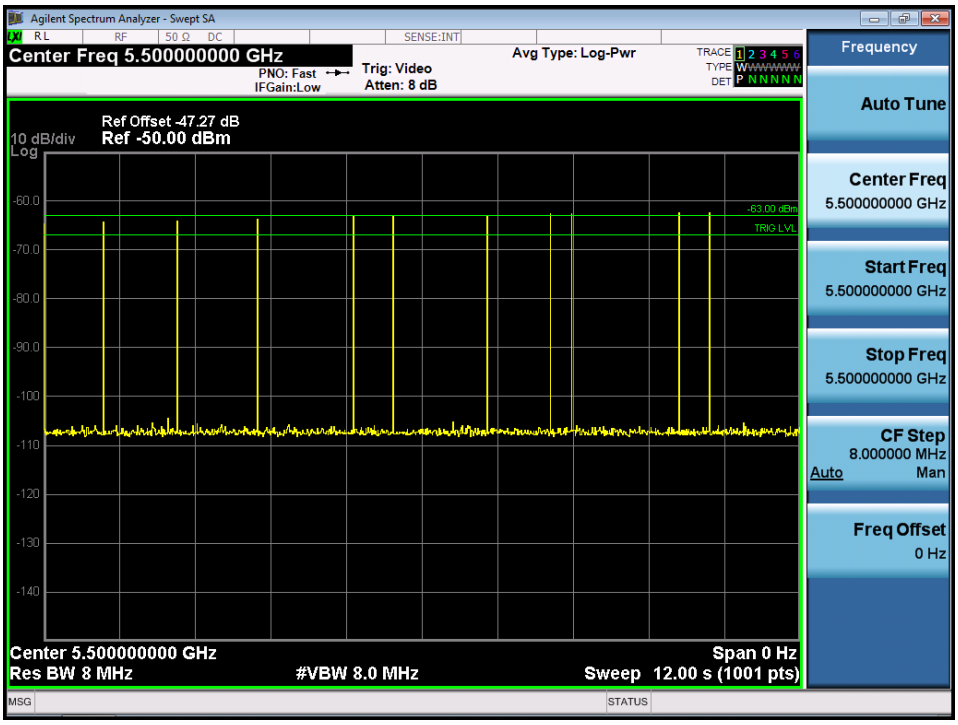

USA Bin 5 Radar Calibration

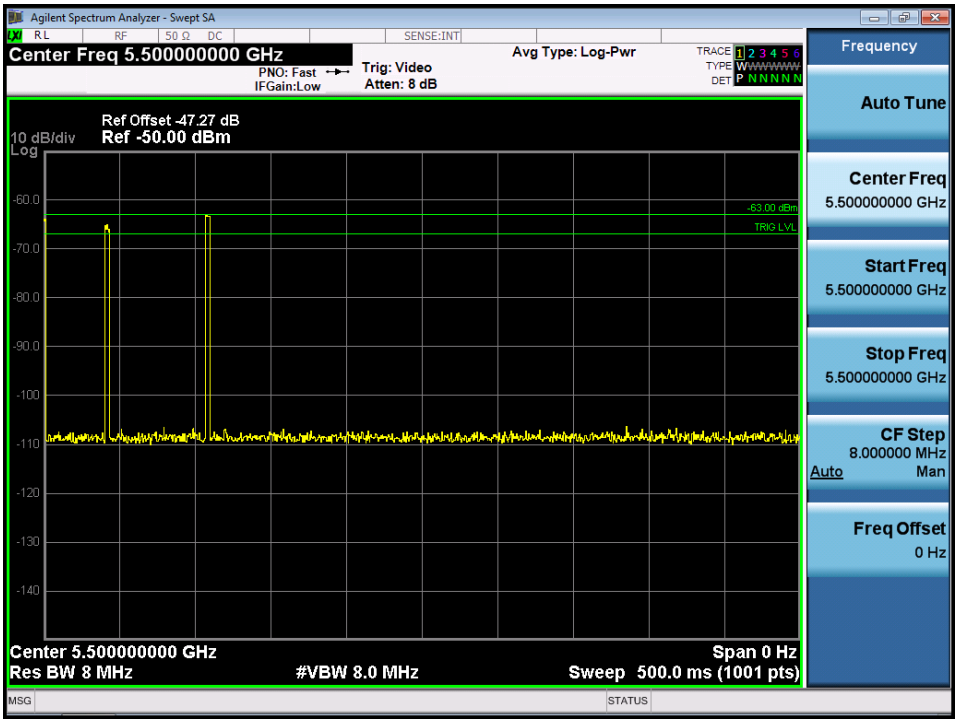

USA Frequency Hopping Radar Calibration

B.1 Test Procedure/Results

A spectrum analyzer is used as a monitor to verify that the UUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the

Non-Occupancy Period after the detection and Channel move. It is also used to monitor UUT transmissions during the Channel Availability Check Time.

Following is the test setup used to generate the Radar Waveforms, and for all DFS tests described herein.

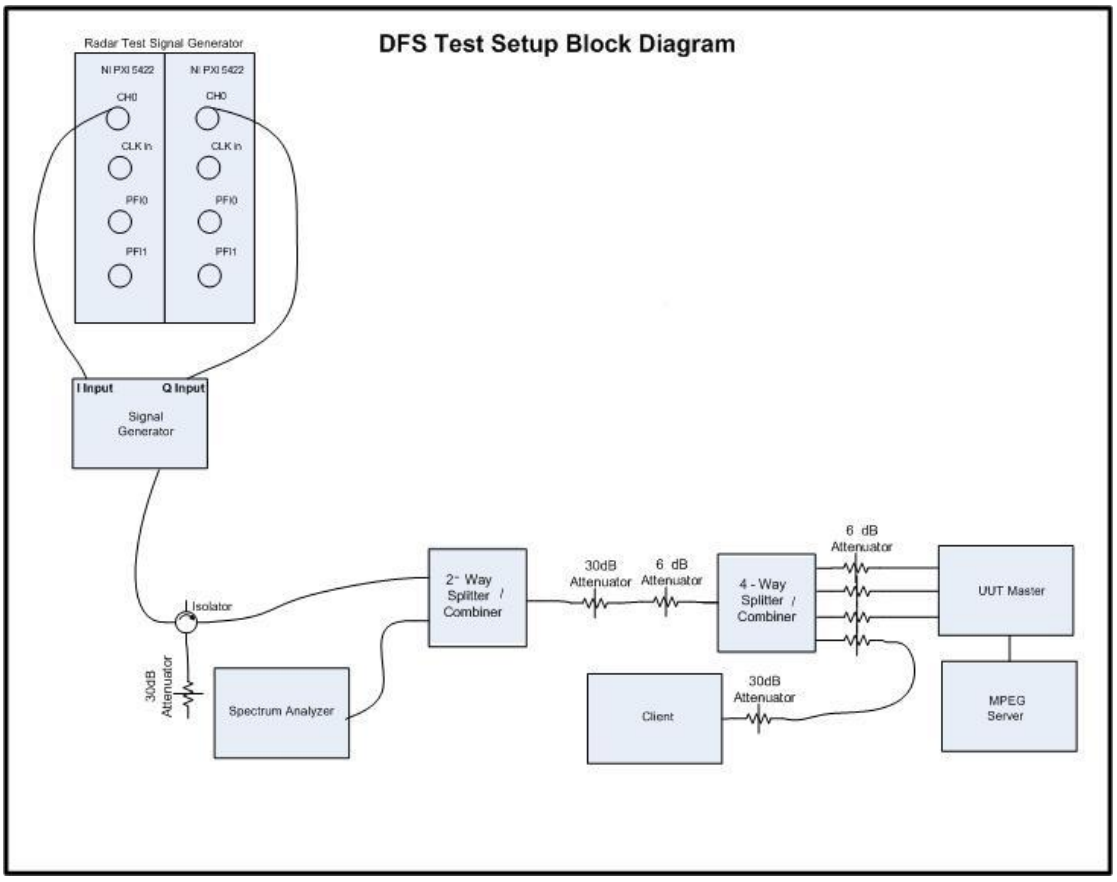

Conducted Setup: Radar Test Waveforms are injected into the Master

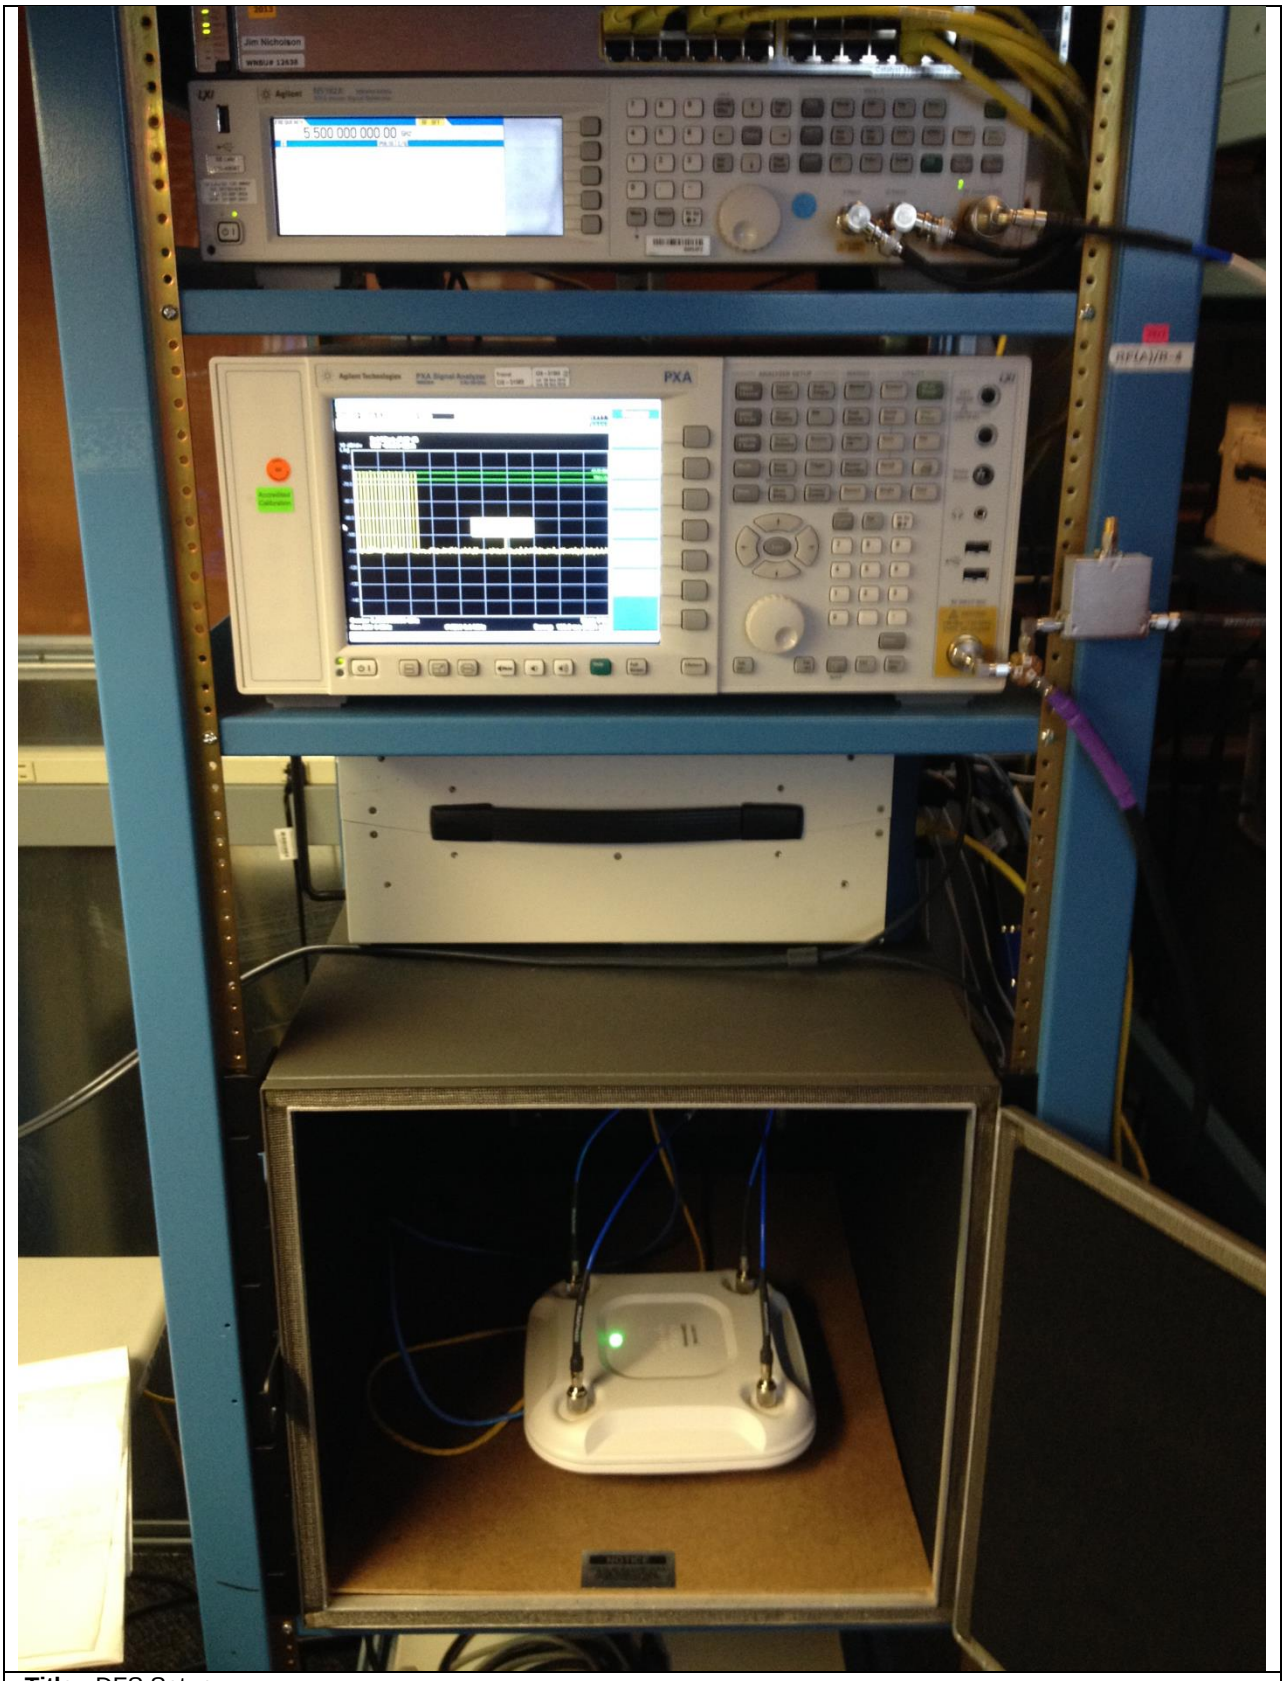

Title: DFS Setup

B.2 UNII Detection Bandwidth

Test Procedure

Ref. KDB 905462 D02 UNII section 7.8.1

All UNII 20 MHz channels for this device have identical Channel bandwidths, all 40 MHz channels have identical Channel bandwidths, and all 80 MHz channels have identical Channel bandwidths. Therefore, all DFS testing was done at 5500 MHz. The 99% channel bandwidth for 20MHz signals is 18 MHz, the the 99% channel bandwidth for 40MHz signals is 36 MHz, and the 99% channel bandwidth for 80MHz signals is 76. (See the 26dB BW section of the RF report for further measurement details).

The generating equipment is configured as shown in the Conducted Test Setup above. A single *Burst* of the desired radar profile is produced at 5500MHz at a -63dBm level. The UUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the UUT is noted. The UUT must detect the Radar Waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as Fh.

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as Fl.

The U-NII Detection Bandwidth is calculated as follows:

U-NII Detection Bandwidth = $F_H - F_L$

The U-NII Detection Bandwidth must be at least 100% of the UUT transmitter 99% power bandwidth (18 MHz for 20MHz signals, 36 MHz for 40 MHz signals, and 76 MHz for 80 MHz signals); otherwise, the UUT does not comply with DFS requirements.

For the chirped Bin 5 radar, the U-NII Detection Bandwidth must be at least 80% of the UUT transmitter 99% power bandwidth (14 MHz for 20MHz signals, 28 MHz for 40 MHz signals, and 60 MHz for 80 MHz signals); otherwise, the UUT does not comply with DFS requirements.

UNII Detection Bandwidth Results, 20MHz Signal Bandwidth

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100	20	17
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 0 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100	20	17
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 1A Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100	20	17
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 1B Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100	20	17
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 2 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100	20	17
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 3 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	0	0	0	0	0	0	0	0	0	0	0		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100	18	17
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	0	0	0	0	0	0	0	0	0	0	0		

USA Bin 4 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	0	1	1	1	1	1	90		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	0	90		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100	20	17
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 5 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	0	1	1	1	0	1	80		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	0	1	1	1	1	1	1	1	1	90		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100	18	17
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		

USA Frequency Hopping Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100	40	36
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 0 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100	40	36
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 1A Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100	40	36
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 1B Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100	40	36
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 2 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	0	0	0	1	0	0	0	0	0	0	10		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100	38	36
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	0	0	1	0	0	0	0	0	0	1	20		

USA Bin 3 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	0	0	0	0	0	0	0	0	0	0	0		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100	38	36
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	0	0	0	0	0	0	0	0	0	0	0		

USA Bin 4 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	0	90		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100	40	36
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 5 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100		
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100	40	36
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		

USA Frequency Hopping Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	0	1	1	0	1	1	1	1	1	1	80	78	76
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		
5531	1	1	1	1	1	1	1	1	1	1	100		

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5532	1	1	1	1	1	1	1	1	1	1	100		
5533	1	1	1	1	1	1	1	1	1	1	100		
5534	1	1	1	1	1	1	1	1	1	1	100		
5535	1	1	1	1	1	1	1	1	1	1	100		
5536	1	1	1	1	1	1	1	1	1	1	100		
5537	1	1	1	1	1	1	1	1	1	1	100		
5538	1	1	1	1	1	1	1	1	1	1	100		
5539	1	1	1	1	1	1	1	1	1	1	100		
5540	1	1	1	1	1	1	1	1	1	1	100		
5541	1	1	1	1	1	1	1	1	1	1	100		
5542	1	1	1	1	1	1	1	1	1	1	100		
5543	1	1	1	1	1	1	1	1	1	1	100		
5544	1	1	1	1	1	1	1	1	1	1	100		
5545	1	1	1	1	1	1	1	1	1	1	100		
5546	1	1	1	1	1	1	1	1	1	1	100		
5547	1	1	1	1	1	1	1	1	1	1	100		
5548	1	1	1	1	1	1	1	1	1	1	100		
5549	1	1	1	1	1	1	1	1	1	1	100		
5550	1	1	1	1	1	1	1	1	1	1	100		
5551	1	1	1	1	1	1	1	1	1	1	100	78	76
5552	1	1	1	1	1	1	1	1	1	1	100		
5553	1	1	1	1	1	1	1	1	1	1	100		
5554	1	1	1	1	1	1	1	1	1	1	100		
5555	1	1	1	1	1	1	1	1	1	1	100		
5556	1	1	1	1	1	1	1	1	1	1	100		
5557	1	1	1	1	1	1	1	1	1	1	100		
5558	1	1	1	1	1	1	1	1	1	1	100		
5559	1	1	1	1	1	1	1	1	1	1	100		
5560	1	1	1	1	1	1	1	1	1	1	100		
5561	1	1	1	1	1	1	1	1	1	1	100		
5562	1	1	1	1	1	1	1	1	1	1	100		
5563	1	1	1	1	1	1	1	1	1	1	100		
5564	1	1	1	1	1	1	1	1	1	1	100		
5565	1	1	1	1	1	1	1	1	1	1	100		
5566	1	1	1	1	1	1	1	1	1	1	100		
5567	1	1	1	1	1	1	1	1	1	1	100		
5568	1	1	1	1	1	1	1	1	1	1	100		
5569	1	1	1	1	1	1	1	1	1	1	100		
5570	0	0	0	1	0	0	1	0	0	0	20		

USA Bin 0 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	0	1	1	1	0	1	0	1	1	1	70	78	76
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		
5531	1	1	1	1	1	1	1	1	1	1	100		

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5532	1	1	1	1	1	1	1	1	1	1	100		
5533	1	1	1	1	1	1	1	1	1	1	100		
5534	1	1	1	1	1	1	1	1	1	1	100		
5535	1	1	1	1	1	1	1	1	1	1	100		
5536	1	1	1	1	1	1	1	1	1	1	100		
5537	1	1	1	1	1	1	1	1	1	1	100		
5538	1	1	1	1	1	1	1	1	1	1	100		
5539	1	1	1	1	1	1	1	1	1	1	100		
5540	1	1	1	1	1	1	1	1	1	1	100		
5541	1	1	1	1	1	1	1	1	1	1	100		
5542	1	1	1	1	1	1	1	1	1	1	100		
5543	1	1	1	1	1	1	1	1	1	1	100		
5544	1	1	1	1	1	1	1	1	1	1	100		
5545	1	1	1	1	1	1	1	1	1	1	100		
5546	1	1	1	1	1	1	1	1	1	1	100		
5547	1	1	1	1	1	1	1	1	1	1	100		
5548	1	1	1	1	1	1	1	1	1	1	100		
5549	1	1	1	1	1	1	1	1	1	1	100		
5550	1	1	1	1	1	1	1	1	1	1	100		
5551	1	1	1	1	1	1	1	1	1	1	100	78	76
5552	1	1	1	1	1	1	1	1	1	1	100		
5553	1	1	1	1	1	1	1	1	1	1	100		
5554	1	1	1	1	1	1	1	1	1	1	100		
5555	1	1	1	1	1	1	1	1	1	1	100		
5556	1	1	1	1	1	1	1	1	1	1	100		
5557	1	1	1	1	1	1	1	1	1	1	100		
5558	1	1	1	1	1	1	1	1	1	1	100		
5559	1	1	1	1	1	1	1	1	1	1	100		
5560	1	1	1	1	1	1	1	1	1	1	100		
5561	1	1	1	1	1	1	1	1	1	1	100		
5562	1	1	1	1	1	1	1	1	1	1	100		
5563	1	1	1	1	1	1	1	1	1	1	100		
5564	1	1	1	1	1	1	1	1	1	1	100		
5565	1	1	1	1	1	1	1	1	1	1	100		
5566	1	1	1	1	1	1	1	1	1	1	100		
5567	1	1	1	1	1	1	1	1	1	1	100		
5568	1	1	1	1	1	1	1	1	1	1	100		
5569	1	1	1	1	1	1	1	1	1	1	100		
5570	1	0	0	0	0	0	0	0	1	0	20		

USA Bin 1A Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	0	1	1	0	0	1	1	1	70	78	76
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		
5531	1	1	1	1	1	1	1	1	1	1	100		

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5532	1	1	1	1	1	1	1	1	1	1	100		
5533	1	1	1	1	1	1	1	1	1	1	100		
5534	1	1	1	1	1	1	1	1	1	1	100		
5535	1	1	1	1	1	1	1	1	1	1	100		
5536	1	1	1	1	1	1	1	1	1	1	100		
5537	1	1	1	1	1	1	1	1	1	1	100		
5538	1	1	1	1	1	1	1	1	1	1	100		
5539	1	1	1	1	1	1	1	1	1	1	100		
5540	1	1	1	1	1	1	1	1	1	1	100		
5541	1	1	1	1	1	1	1	1	1	1	100		
5542	1	1	1	1	1	1	1	1	1	1	100		
5543	1	1	1	1	1	1	1	1	1	1	100		
5544	1	1	1	1	1	1	1	1	1	1	100		
5545	1	1	1	1	1	1	1	1	1	1	100		
5546	1	1	1	1	1	1	1	1	1	1	100		
5547	1	1	1	1	1	1	1	1	1	1	100		
5548	1	1	1	1	1	1	1	1	1	1	100		
5549	1	1	1	1	1	1	1	1	1	1	100		
5550	1	1	1	1	1	1	1	1	1	1	100		
5551	1	1	1	1	1	1	1	1	1	1	100	78	76
5552	1	1	1	1	1	1	1	1	1	1	100		
5553	1	1	1	1	1	1	1	1	1	1	100		
5554	1	1	1	1	1	1	1	1	1	1	100		
5555	1	1	1	1	1	1	1	1	1	1	100		
5556	1	1	1	1	1	1	1	1	1	1	100		
5557	1	1	1	1	1	1	1	1	1	1	100		
5558	1	1	1	1	1	1	1	1	1	1	100		
5559	1	1	1	1	1	1	1	1	1	1	100		
5560	1	1	1	1	1	1	1	1	1	1	100		
5561	1	1	1	1	1	1	1	1	1	1	100		
5562	1	1	1	1	1	1	1	1	1	1	100		
5563	1	1	1	1	1	1	1	1	1	1	100		
5564	1	1	1	1	1	1	1	1	1	1	100		
5565	1	1	1	1	1	1	1	1	1	1	100		
5566	1	1	1	1	1	1	1	1	1	1	100		
5567	1	1	1	1	1	1	1	1	1	1	100		
5568	1	1	1	1	1	1	1	1	1	1	100		
5569	1	1	1	1	1	1	1	1	1	1	100		
5570	1	1	1	0	1	0	0	0	1	0	50		

USA Bin 1B Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	0	1	1	0	1	1	1	1	1	1	80	78	76
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		
5531	1	1	1	1	1	1	1	1	1	1	100		

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5532	1	1	1	1	1	1	1	1	1	1	100		
5533	1	1	1	1	1	1	1	1	1	1	100		
5534	1	1	1	1	1	1	1	1	1	1	100		
5535	1	1	1	1	1	1	1	1	1	1	100		
5536	1	1	1	1	1	1	1	1	1	1	100		
5537	1	1	1	1	1	1	1	1	1	1	100		
5538	1	1	1	1	1	1	1	1	1	1	100		
5539	1	1	1	1	1	1	1	1	1	1	100		
5540	1	1	1	1	1	1	1	1	1	1	100		
5541	1	1	1	1	1	1	1	1	1	1	100		
5542	1	1	1	1	1	1	1	1	1	1	100		
5543	1	1	1	1	1	1	1	1	1	1	100		
5544	1	1	1	1	1	1	1	1	1	1	100		
5545	1	1	1	1	1	1	1	1	1	1	100		
5546	1	1	1	1	1	1	1	1	1	1	100		
5547	1	1	1	1	1	1	1	1	1	1	100		
5548	1	1	1	1	1	1	1	1	1	1	100		
5549	1	1	1	1	1	1	1	1	1	1	100		
5550	1	1	1	1	1	1	1	1	1	1	100		
5551	1	1	1	1	1	1	1	1	1	1	100	78	76
5552	1	1	1	1	1	1	1	1	1	1	100		
5553	1	1	1	1	1	1	1	1	1	1	100		
5554	1	1	1	1	1	1	1	1	1	1	100		
5555	1	1	1	1	1	1	1	1	1	1	100		
5556	1	1	1	1	1	1	1	1	1	1	100		
5557	1	1	1	1	1	1	1	1	1	1	100		
5558	1	1	1	1	1	1	1	1	1	1	100		
5559	1	1	1	1	1	1	1	1	1	1	100		
5560	1	1	1	1	1	1	1	1	1	1	100		
5561	1	1	1	1	1	1	1	1	1	1	100		
5562	1	1	1	1	1	1	1	1	1	1	100		
5563	1	1	1	1	1	1	1	1	1	1	100		
5564	1	1	1	1	1	1	1	1	1	1	100		
5565	1	1	1	1	1	1	1	1	1	1	100		
5566	1	1	1	1	1	1	1	1	1	1	100		
5567	1	1	1	1	1	1	1	1	1	1	100		
5568	1	1	1	1	1	1	1	1	1	1	100		
5569	1	1	1	1	1	1	1	1	1	1	100		
5570	1	0	0	1	0	1	1	0	0	0	40		

USA Bin 2 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	0	0	0	0	0	0	0	0	0	0	0	76	76
5491	0	0	0	0	0	0	0	0	0	0	0		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	0	1	90		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		
5531	1	1	1	1	1	1	1	1	1	1	100		

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5532	1	1	1	1	1	1	1	1	1	1	100		
5533	1	1	1	1	1	1	0	1	1	1	90		
5534	1	1	1	1	1	1	1	1	1	1	100		
5535	1	1	1	1	1	1	1	1	1	1	100		
5536	1	1	1	1	1	1	1	1	1	1	100		
5537	1	1	1	1	1	1	1	1	1	1	100		
5538	1	1	1	1	1	1	1	1	1	1	100		
5539	1	1	1	1	1	1	1	1	1	1	100		
5540	1	1	1	1	1	1	1	1	1	1	100		
5541	1	1	1	1	1	1	1	1	1	1	100		
5542	1	1	1	1	1	1	1	1	1	1	100		
5543	1	1	1	1	1	1	1	1	1	1	100		
5544	1	1	1	1	1	1	1	1	1	1	100		
5545	1	1	1	1	1	1	1	1	1	1	100		
5546	1	1	1	1	1	1	1	1	1	1	100		
5547	1	1	1	1	1	1	1	1	1	1	100		
5548	1	1	1	1	1	1	1	1	1	1	100		
5549	1	1	1	1	1	1	1	1	1	1	100		
5550	1	1	1	1	1	1	1	1	1	1	100		
5551	1	1	1	1	1	1	1	1	1	1	100	76	76
5552	1	1	1	1	1	1	1	1	1	1	100		
5553	1	1	1	1	1	1	1	1	1	1	100		
5554	1	1	1	1	1	1	1	1	1	1	100		
5555	1	1	1	1	1	1	1	1	1	1	100		
5556	1	1	1	1	1	1	1	1	1	1	100		
5557	1	1	1	1	1	1	1	1	1	1	100		
5558	1	1	1	1	1	1	1	1	1	1	100		
5559	1	1	1	1	1	1	1	1	1	1	100		
5560	1	1	1	1	1	1	1	1	1	1	100		
5561	1	1	1	1	1	1	1	1	1	1	100		
5562	1	1	1	1	1	1	1	1	1	1	100		
5563	1	1	1	1	1	1	1	1	1	1	100		
5564	1	1	1	1	1	1	1	1	1	1	100		
5565	1	1	1	1	1	1	1	1	1	1	100		
5566	1	1	1	1	1	1	1	1	1	1	100		
5567	1	1	1	1	1	1	1	1	1	1	100		
5568	1	1	1	1	1	1	1	1	1	1	100		
5569	0	0	0	0	0	0	0	0	0	0	0		
5570	0	0	0	0	0	0	0	0	0	0	0		

USA Bin 3 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	0	0	0	0	0	0	0	0	0	0	0	76	76
5491	0	0	0	0	0	0	0	0	0	0	0		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		
5531	1	1	1	1	1	1	1	1	1	1	100		

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5532	1	1	1	1	1	1	1	1	1	1	100		
5533	1	1	1	1	1	1	1	1	1	1	100		
5534	1	1	1	1	1	1	1	1	1	1	100		
5535	1	1	1	1	1	1	1	1	1	1	100		
5536	1	1	1	1	1	1	1	1	1	1	100		
5537	1	1	1	1	1	1	1	1	1	1	100		
5538	1	1	1	1	1	1	1	1	1	1	100		
5539	1	1	1	1	1	1	1	1	1	1	100		
5540	1	1	1	1	1	1	1	1	1	1	100		
5541	1	1	1	1	1	1	1	1	1	1	100		
5542	1	1	1	1	1	1	1	1	1	1	100		
5543	1	1	1	1	1	1	1	1	1	1	100		
5544	1	1	1	1	1	1	1	1	1	1	100		
5545	1	1	1	1	1	1	1	1	1	1	100		
5546	1	1	1	1	1	1	1	1	1	1	100		
5547	1	1	1	1	1	1	1	1	1	1	100		
5548	1	1	1	1	1	1	1	1	1	1	100		
5549	1	1	1	1	1	1	1	1	1	1	100		
5550	1	1	1	1	1	1	1	1	1	1	100		
5551	1	1	1	1	1	1	1	1	1	1	100	76	76
5552	1	1	1	1	1	1	1	1	1	1	100		
5553	1	1	1	1	1	1	1	1	1	1	100		
5554	1	1	1	1	1	1	1	1	1	1	100		
5555	1	1	1	1	1	1	1	1	1	1	100		
5556	1	1	1	1	1	1	1	1	1	1	100		
5557	1	1	1	1	1	1	1	1	1	1	100		
5558	1	1	1	1	1	1	1	1	1	1	100		
5559	1	1	1	1	1	1	1	1	1	1	100		
5560	1	1	1	1	1	1	1	1	1	1	100		
5561	1	1	1	1	1	1	1	1	1	1	100		
5562	1	1	1	1	1	1	1	1	1	1	100		
5563	1	1	1	1	1	1	1	1	1	1	100		
5564	1	1	1	1	1	1	1	1	1	1	100		
5565	1	1	1	1	1	1	1	1	1	1	100		
5566	1	1	1	1	1	1	1	1	1	1	100		
5567	1	1	1	1	1	1	1	1	1	1	100		
5568	1	1	1	1	1	1	1	1	1	1	100		
5569	0	0	0	0	0	0	0	0	0	0	0		
5570	0	0	0	0	0	0	0	0	0	0	0		

USA Bin 4 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100	80	76
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		
5531	1	1	1	1	1	1	1	1	1	1	100		

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5532	1	1	1	1	1	1	1	1	1	1	100		
5533	1	1	1	1	1	1	1	1	1	1	100		
5534	1	1	1	1	1	1	1	1	1	1	100		
5535	1	1	1	1	1	1	1	1	1	1	100		
5536	1	1	1	1	1	1	1	1	1	1	100		
5537	1	1	1	1	1	1	1	1	1	1	100		
5538	1	1	1	1	1	1	1	1	1	1	100		
5539	1	1	1	1	1	1	1	1	1	1	100		
5540	1	1	1	1	1	1	1	1	1	1	100		
5541	1	1	1	1	1	1	1	1	1	1	100		
5542	1	1	1	1	1	1	1	1	1	1	100		
5543	1	1	1	1	1	1	1	1	1	1	100		
5544	1	1	1	1	1	1	1	1	1	1	100		
5545	1	1	1	1	1	1	1	1	1	1	100		
5546	1	1	1	1	1	1	1	1	1	1	100		
5547	1	1	1	1	1	1	1	1	1	1	100		
5548	1	1	1	1	1	1	1	1	1	1	100		
5549	1	1	1	1	1	1	1	1	1	1	100		
5550	1	1	1	1	1	1	1	1	1	1	100		
5551	1	1	1	1	1	1	1	1	1	1	100	80	76
5552	1	1	1	1	1	1	1	1	1	1	100		
5553	1	1	1	1	1	1	1	1	1	1	100		
5554	1	1	1	1	1	1	1	1	1	1	100		
5555	1	1	1	1	1	1	1	1	1	1	100		
5556	1	1	1	1	1	1	1	1	1	1	100		
5557	1	1	1	1	1	1	1	1	1	1	100		
5558	1	1	1	1	1	1	1	1	1	1	100		
5559	1	1	1	1	1	1	1	1	1	1	100		
5560	1	1	1	1	1	1	1	1	1	1	100		
5561	1	1	1	1	1	1	1	1	1	1	100		
5562	1	1	1	1	1	1	1	1	1	1	100		
5563	1	1	1	1	1	1	1	1	1	1	100		
5564	1	1	1	1	1	1	1	1	1	1	100		
5565	1	1	1	1	1	1	1	1	1	1	100		
5566	1	1	1	1	1	1	1	1	1	1	100		
5567	1	1	1	1	1	1	1	1	1	1	100		
5568	1	1	1	1	1	1	1	1	1	1	100		
5569	1	1	1	1	1	1	1	1	1	1	100		
5570	1	1	1	1	1	1	1	1	1	1	100		

USA Bin 5 Radar

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5490	1	1	1	1	1	1	1	1	1	1	100	80	76
5491	1	1	1	1	1	1	1	1	1	1	100		
5492	1	1	1	1	1	1	1	1	1	1	100		
5493	1	1	1	1	1	1	1	1	1	1	100		
5494	1	1	1	1	1	1	1	1	1	1	100		
5495	1	1	1	1	1	1	1	1	1	1	100		
5496	1	1	1	1	1	1	1	1	1	1	100		
5497	1	1	1	1	1	1	1	1	1	1	100		
5498	1	1	1	1	1	1	1	1	1	1	100		
5499	1	1	1	1	1	1	1	1	1	1	100		
5500	1	1	1	1	1	1	1	1	1	1	100		
5501	1	1	1	1	1	1	1	1	1	1	100		
5502	1	1	1	1	1	1	1	1	1	1	100		
5503	1	1	1	1	1	1	1	1	1	1	100		
5504	1	1	1	1	1	1	1	1	1	1	100		
5505	1	1	1	1	1	1	1	1	1	1	100		
5506	1	1	1	1	1	1	1	1	1	1	100		
5507	1	1	1	1	1	1	1	1	1	1	100		
5508	1	1	1	1	1	1	1	1	1	1	100		
5509	1	1	1	1	1	1	1	1	1	1	100		
5510	1	1	1	1	1	1	1	1	1	1	100		
5511	1	1	1	1	1	1	1	1	1	1	100		
5512	1	1	1	1	1	1	1	1	1	1	100		
5513	1	1	1	1	1	1	1	1	1	1	100		
5514	1	1	1	1	1	1	1	1	1	1	100		
5515	1	1	1	1	1	1	1	1	1	1	100		
5516	1	1	1	1	1	1	1	1	1	1	100		
5517	1	1	1	1	1	1	1	1	1	1	100		
5518	1	1	1	1	1	1	1	1	1	1	100		
5519	1	1	1	1	1	1	1	1	1	1	100		
5520	1	1	1	1	1	1	1	1	1	1	100		
5521	1	1	1	1	1	1	1	1	1	1	100		
5522	1	1	1	1	1	1	1	1	1	1	100		
5523	1	1	1	1	1	1	1	1	1	1	100		
5524	1	1	1	1	1	1	1	1	1	1	100		
5525	1	1	1	1	1	1	1	1	1	1	100		
5526	1	1	1	1	1	1	1	1	1	1	100		
5527	1	1	1	1	1	1	1	1	1	1	100		
5528	1	1	1	1	1	1	1	1	1	1	100		
5529	1	1	1	1	1	1	1	1	1	1	100		
5530	1	1	1	1	1	1	1	1	1	1	100		
5531	1	1	1	1	1	1	1	1	1	1	100		

	DFS Detection Trials (1=Detection, Blank= No Detection)												
Radar Frequency	**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**Detection Rate (%)**	**Detection Bandwidth (MHz)**	**Limit (MHz)**
5532	1	1	1	1	1	1	1	1	1	1	100		
5533	1	1	1	1	1	1	1	1	1	1	100		
5534	1	1	1	1	1	1	1	1	1	1	100		
5535	1	1	1	1	1	1	1	1	1	1	100		
5536	1	1	1	1	1	1	1	1	1	1	100		
5537	1	1	1	1	1	1	1	1	1	1	100		
5538	1	1	1	1	1	1	1	1	1	1	100		
5539	1	1	1	1	1	1	1	1	1	1	100		
5540	1	1	1	1	1	1	1	1	1	1	100		
5541	1	1	1	1	1	1	1	1	1	1	100		
5542	1	1	1	1	1	1	1	1	1	1	100		
5543	1	1	1	1	1	1	1	1	1	1	100		
5544	1	1	1	1	1	1	1	1	1	1	100		
5545	1	1	1	1	1	1	1	1	1	1	100		
5546	1	1	1	1	1	1	1	1	1	1	100		
5547	1	1	1	1	1	1	1	1	1	1	100		
5548	1	1	1	1	1	1	1	1	1	1	100		
5549	1	1	1	1	1	1	1	1	1	1	100		
5550	1	1	1	1	1	1	1	1	1	1	100		
5551	1	1	1	1	1	1	1	1	1	1	100	80	76
5552	1	1	1	1	1	1	1	1	1	1	100		
5553	1	1	1	1	1	1	1	1	1	1	100		
5554	1	1	1	1	1	1	1	1	1	1	100		
5555	1	1	1	1	1	1	1	1	1	1	100		
5556	1	1	1	1	1	1	1	1	1	1	100		
5557	1	1	1	1	1	1	1	1	1	1	100		
5558	1	1	1	1	1	1	1	1	1	1	100		
5559	1	1	1	1	1	1	1	1	1	1	100		
5560	1	1	1	1	1	1	1	1	1	1	100		
5561	1	1	1	1	1	1	1	1	1	1	100		
5562	1	1	1	1	1	1	1	1	1	1	100		
5563	1	1	1	1	1	1	1	1	1	1	100		
5564	1	1	1	1	1	1	1	1	1	1	100		
5565	1	1	1	1	1	1	1	1	1	1	100		
5566	1	1	1	1	1	1	1	1	1	1	100		
5567	1	1	1	1	1	1	1	1	1	1	100		
5568	1	1	1	1	1	1	1	1	1	1	100		
5569	1	1	1	1	1	1	1	1	1	1	100		
5570	1	1	1	1	1	1	1	1	1	1	100		

USA Frequency Hopping Radar

B.3 Initial Channel Availability Check Time

The tests that the UUT does not emit beacon, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms.

The U-NII device is powered on and instructed to operate at 5500 MHz. At the same time the UUT is powered on, the spectrum analyzer is set to zero span mode with a 3 MHz resolution bandwidth at 5500MHz with a 2.5 minute sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The UUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

The initial power up time of the UUT is indicated by marker 1 in the plot. Initial beacons/data transmissions are indicated by marker 2.

Initial Channel Availability Check Time

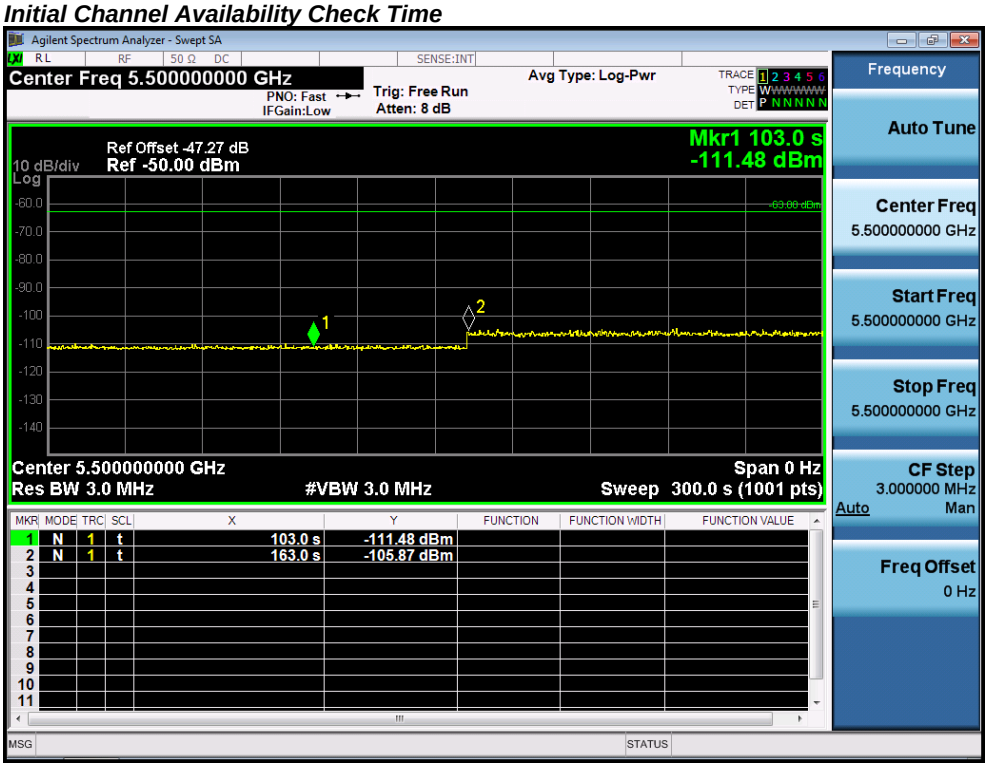

B.4 Radar Burst at the Beginning of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-63dBm) occurs at the beginning of the Channel Availability Check Time.

The UUT is powered on at T_0. T_1 denotes the instant when the UUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T_1 and will end no sooner than T_1 + 60 seconds.

A single Burst of short pulse of radar type 0 at -63 dBm will commence within a 6 second window starting at T_1.

Visual indication on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5500MHz will continue for 2.5 minutes after the radar Burst has been generated.

Verify that during the 2.5 minute measurement window no UUT transmissions occurred at 5500MHz.

Radar Burst at the Beginning of the Channel Availability Check Time

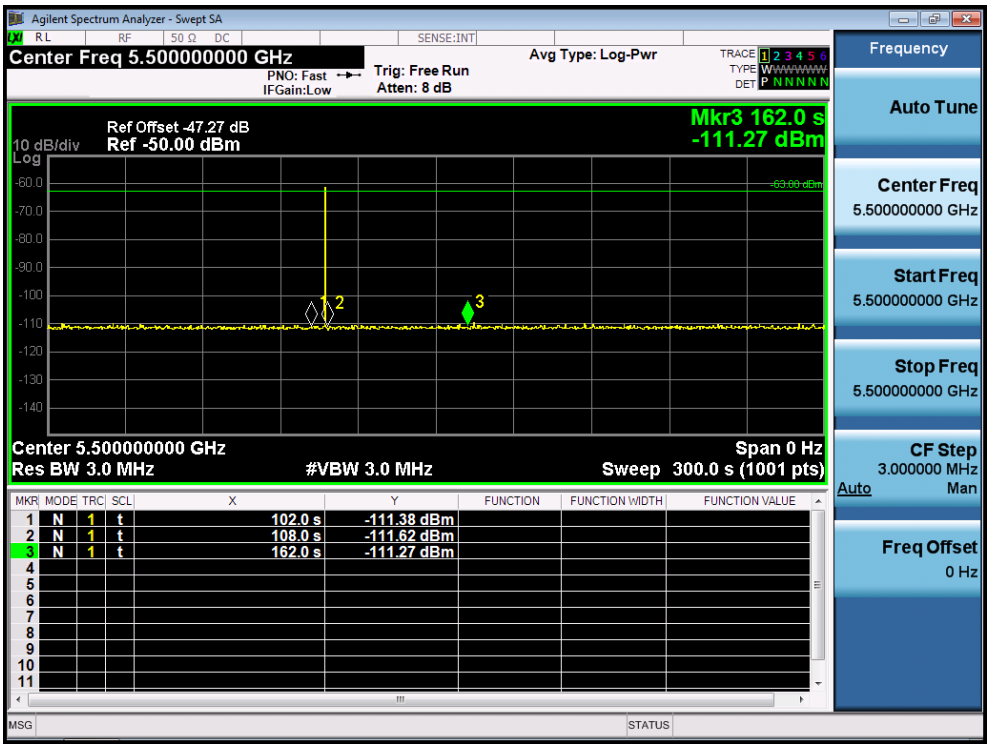

B.5 Radar Burst at the End of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-63dBm) occurs at the end of the Channel Availability Check Time.

The UUT is powered on at T_0. T_1 denotes the instant when the UUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T_1 and will end no sooner than T_1 + 60 seconds.

A single Burst of short pulse of radar type 0 at -63 dBm will commence within a 6 second window starting at T_1+ 54 seconds.

Visual indication on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5500MHz will continue for 2.5 minutes after the radar Burst has been generated.

Verify that during the 2.5 minute measurement window no UUT transmissions occurred at 5500MHz.

Radar Burst at the End of the Channel Availability Check Time

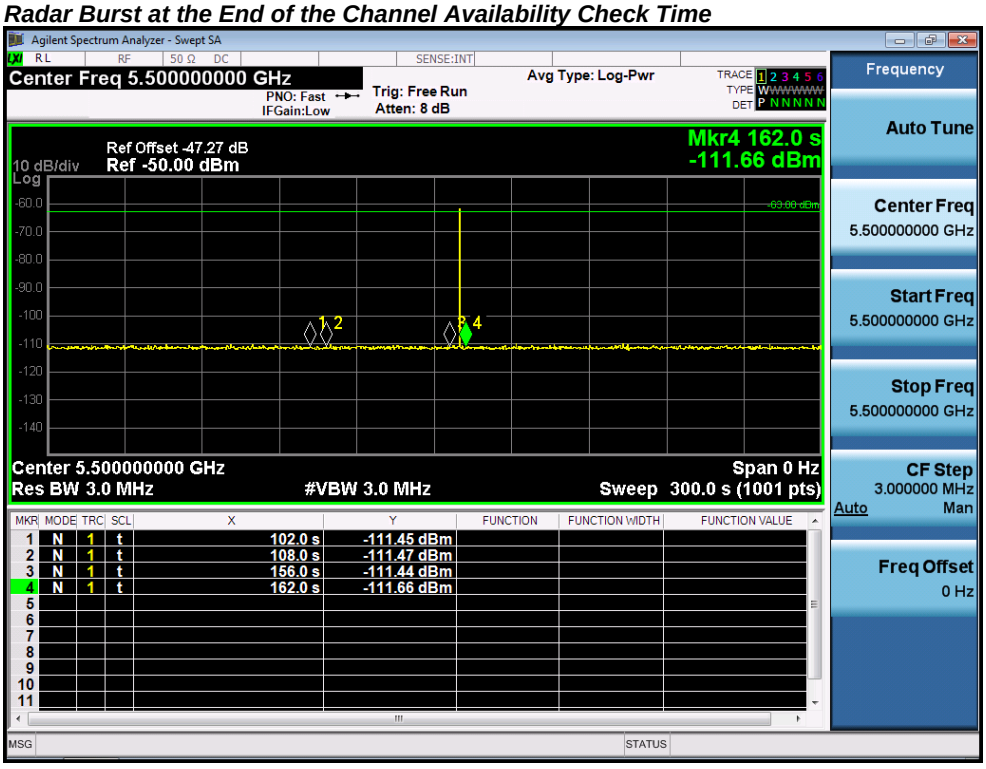

B.6 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

These tests define how the following DFS parameters are verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5500 MHz. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

At time T_0 the Radar Waveform generator sends a Burst of pulses for radar type 0 at -63dBm.

Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time results to the limits defined in the *DFS Response requirement values table*.

The following plot demonstrates a channel close time of 50ms, with an aggregate of no more than 60 ms. Type 0 radar was used for this data.

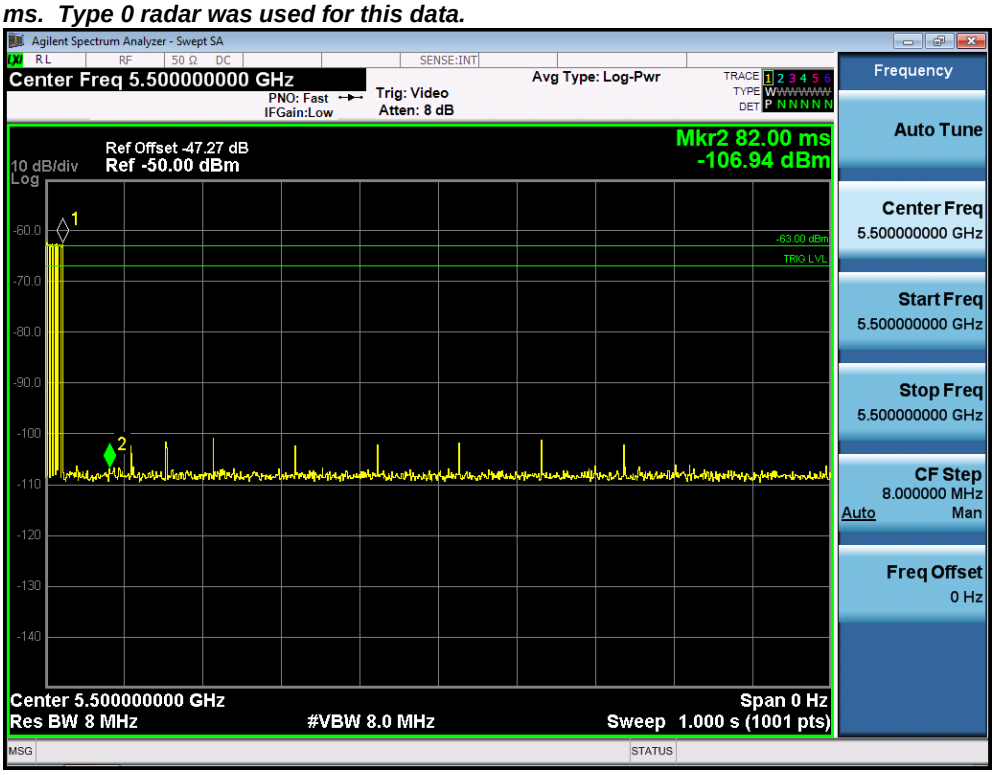

Channel Move Time, Channel Closing Transmission Time for USA Bin 2

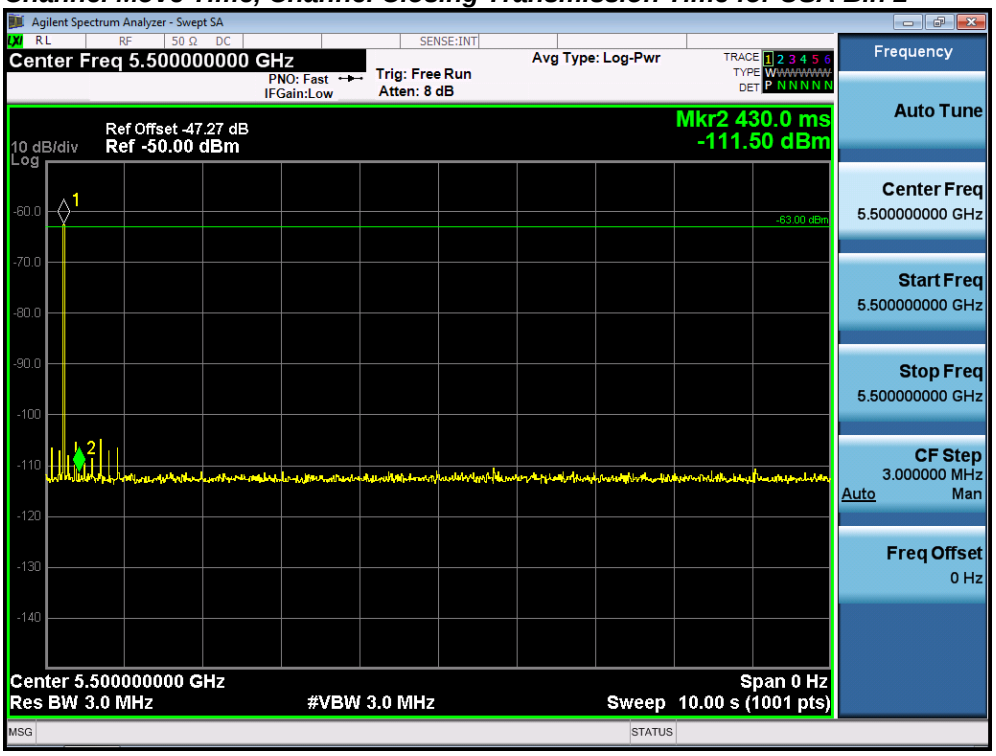

Measure the UUT for more than 30 minutes following the channel close/move time to verify that the UUT does not resume any transmissions on this Channel.

30 Minute Non-Occupancy Period (using Type 0 radar)

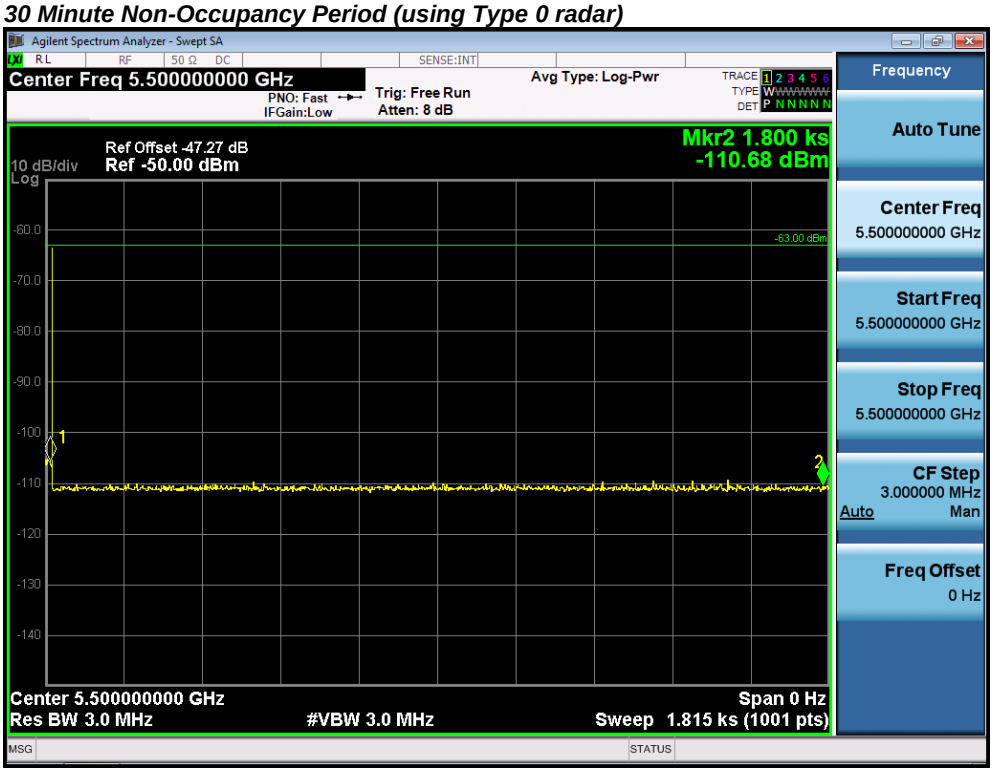

B.7 Statistical Performance Check

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5500 MHz. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6 at -63dbm. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

$$\frac{TotalWaveformDetections}{TotalWaveformTrials} \times 100$$ = Probability of Detection Radar Waveform

The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the *Radar Test Waveforms* section. The data represents the worst case detection for 20 MHz, 40 MHz, and 80 MHz signal bandwidths.

USA Bin 1A/1B Radar Statistical Performance

Trial #	Pulses	PW	PRI	1=Detection 0=No Detection	Detection Percentage	Limit
1	72	1	738	1	100.0%	60.0%
2	81	1	658	1		
3	65	1	818	1		
4	89	1	598	1		
5	99	1	538	1		
6	59	1	898	1		
7	62	1	858	1		
8	68	1	778	1		
9	57	1	938	1		
10	58	1	918	1		
11	18	1	3066	1		
12	72	1	738	1		
13	65	1	818	1		
14	92	1	578	1		
15	59	1	898	1		
16	29	1	1869	1		
17	22	1	2505	1		
18	37	1	1455	1		
19	49	1	1079	1		
20	67	1	799	1		
21	33	1	1601	1		
22	64	1	831	1		
23	54	1	991	1		
24	36	1	1474	1		
25	28	1	1916	1		
26	53	1	1002	1		
27	24	1	2214	1		
28	30	1	1802	1		
29	22	1	2452	1		
30	27	1	1989	1		

USA Bin 2 Radar Statistical Performance

Trial #	Pulses	PW	PRI	1=Detection 0=No Detection	Detection Percentage	Limit
1	24	1.6	191	1		
2	27	1.2	195	1		
3	28	1.3	203	1		
4	27	2.6	204	1		
5	25	3.3	151	1		
6	26	3.4	179	1		
7	23	4.8	155	1		
8	29	2.4	221	0		
9	28	5	178	0		
10	27	4.3	158	1		
11	27	4.4	176	1		
12	29	3.3	191	0		
13	25	3.6	151	1		
14	23	4.8	209	1		
15	24	4.8	216	1		
16	28	3.2	228	1	73.3%	60.0%
17	23	1	209	0		
18	28	2.4	178	1		
19	27	4.4	175	1		
20	24	4.9	186	0		
21	23	4.7	196	1		
22	29	2.4	218	0		
23	29	1.2	188	0		
24	23	1.7	190	1		
25	25	3.5	164	1		
26	23	3.5	200	1		
27	27	2.7	173	1		
28	26	1	205	1		
29	27	4.5	202	1		
30	26	1.3	171	0		

USA Bin 3 Radar Statistical Performance

Trial #	Pulses	PW	PRI	1=Detection 0=No Detection	Detection Percentage	Limit
1	18	6.3	289	0	73.3%	60.0%
2	16	9.6	242	1		
3	18	9.9	370	0		
4	17	9.9	230	1		
5	17	6.3	415	1		
6	17	9.5	240	1		
7	17	8.8	489	1		
8	16	6.2	353	0		
9	18	8.3	226	1		
10	16	9.5	461	0		
11	18	7.5	335	0		
12	16	7	355	1		
13	18	9.9	200	1		
14	17	8.4	370	1		
15	16	8.7	203	0		
16	17	9	406	1		
17	18	6.3	308	0		
18	16	8.7	218	1		
19	16	7.3	467	1		
20	17	9.8	425	1		
21	18	9.1	307	1		
22	18	7.9	482	1		
23	18	9.7	487	1		
24	17	9.8	407	0		
25	18	7.6	385	1		
26	18	8.2	226	1		
27	17	9.7	495	1		
28	16	9	288	1		
29	18	9.1	350	1		
30	16	7	230	1		

USA Bin 4 Radar Statistical Performance

Trial #	Pulses	PW	PRI	1=Detection 0=No Detection	Detection Percentage	Limit
1	15	17.2	256	1	80.0%	60.0%
2	16	17.2	459	1		
3	12	11.4	225	1		
4	16	13.8	392	1		
5	16	15.7	421	1		
6	13	19.1	366	1		
7	16	12.6	495	0		
8	14	19.5	457	1		
9	16	17.8	412	1		
10	15	13.8	237	0		
11	12	12.6	272	1		
12	13	14	424	1		
13	13	18.3	208	1		
14	16	16.8	363	1		
15	12	15.3	499	0		
16	13	17.3	376	0		
17	16	18.2	493	1		
18	12	12.5	339	1		
19	14	18.9	360	1		
20	14	11.8	455	1		
21	12	15	426	1		
22	16	19.7	294	1		
23	12	17	373	1		
24	12	17.2	394	0		
25	15	15.9	209	1		
26	15	19.2	240	1		
27	14	17.4	232	1		
28	15	16.5	473	1		
29	16	12	463	1		
30	14	15.5	233	0		

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and is calculated as follows:

$$\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$$ = (100.0%+73.3%+73.3%+80.0)/4 = 81.7% (>80%)

*See the Bin5 Radar Characteristics at the end of this report.

USA Bin 5 Radar Statistical Performance

Trial #	Name	1=Detection 0=No Detection	Detection Percentage	Limit
1	USA Bin 5 Radar Test 1	0.557538		
2	USA Bin 5 Radar Test 2	0.355142	1	
3	USA Bin 5 Radar Test 3	0.09489	1	
4	USA Bin 5 Radar Test 4	0.243505	1	
5	USA Bin 5 Radar Test 5	0.541369	1	
6	USA Bin 5 Radar Test 6	0.639452	1	
7	USA Bin 5 Radar Test 7	0.31269	1	
8	USA Bin 5 Radar Test 8	0.522967	1	
9	USA Bin 5 Radar Test 9	0.547706	1	
10	USA Bin 5 Radar Test 10	0.26351	1	
11	USA Bin 5 Radar Test 11	0.049368	1	
12	USA Bin 5 Radar Test 12	0.824792	1	
13	USA Bin 5 Radar Test 13	0.178605	1	
14	USA Bin 5 Radar Test 14	0.329917	1	
15	USA Bin 5 Radar Test 15	0.520776	1	
16	USA Bin 5 Radar Test 16	0.087832	1	100.0%
17	USA Bin 5 Radar Test 17	0.980697	1	
18	USA Bin 5 Radar Test 18	0.546591	1	
19	USA Bin 5 Radar Test 19	0.637906	1	
20	USA Bin 5 Radar Test 20	0.44482	1	
21	USA Bin 5 Radar Test 21	0.308053	1	
22	USA Bin 5 Radar Test 22	0.086716	1	
23	USA Bin 5 Radar Test 23	0.47666	1	
24	USA Bin 5 Radar Test 24	0.130671	1	
25	USA Bin 5 Radar Test 25	0.108586	1	
26	USA Bin 5 Radar Test 26	0.064714	1	
27	USA Bin 5 Radar Test 27	0.564627	1	
28	USA Bin 5 Radar Test 28	0.060637	1	
29	USA Bin 5 Radar Test 29	0.242808	1	
30	USA Bin 5 Radar Test 30	0.362634	1	

USA Bin 5 Trial #1

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	Pulse Start (S)
1	1	5498.7	18	95				0.557538
2	3	5498.7	18	75		1107	1565	1.324387
3	3	5498.7	18	55		1224	1154	2.252749
4	2	5498.7	18	90		1122		3.88282
5	2	5498.7	18	100		1556		4.617833
6	3	5498.7	18	80		1980	1015	6.195384
7	1	5498.7	18	95				7.55254
8	1	5498.7	18	75				7.915974
9	2	5498.7	18	80		1841		9.644719
10	3	5498.7	18	95		1878	1097	9.873939
11	1	5498.7	18	90				11.230069

USA Bin 5 Trial #2

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	Pulse Start (S)
1	1	5494.7	8	55				0.355142
2	1	5494.7	8	60				0.938437
3	1	5494.7	8	95				1.728562
4	1	5494.7	8	50				2.356006
5	1	5494.7	8	75				2.582455
6	3	5494.7	8	90		1534	1396	3.381986
7	2	5494.7	8	65		1651		4.040992
8	1	5494.7	8	50				4.570926
9	2	5494.7	8	75		1732		4.855772
10	1	5494.7	8	50				5.730502
11	1	5494.7	8	85				6.36914
12	1	5494.7	8	100				6.749511
13	1	5494.7	8	80				7.748224
14	1	5494.7	8	100				8.316496
15	2	5494.7	8	100		1360		8.636252
16	2	5494.7	8	65		1284		9.067025
17	2	5494.7	8	65		1561		10.171559
18	1	5494.7	8	90				10.331739

19	2	5494.7	8	85	1336			
	10.971507							
20	2	5494.7	8	65	1471			
	11.495635							

USA Bin 5 Trial #3

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	
	Pulse Start (S)							
1	1	5499.1	19	70				0.09489
2	1	5499.1	19	55				
	2.443051							
3	2	5499.1	19	80	1180			
	3.923617							
4	2	5499.1	19	100	1515			
	4.512087							
5	2	5499.1	19	75	1080			
	5.839142							
6	2	5499.1	19	90	1438			
	7.633625							
7	2	5499.1	19	90	1769			
	8.293674							
8	1	5499.1	19	100				
	10.455353							
9	2	5499.1	19	65	1218			
	11.154018							

USA Bin 5 Trial #4

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	
	Pulse Start (S)							
1	3	5497.9	16	70	1913		1782	
	0.243505							
2	1	5497.9	16	90				
	1.186233							
3	2	5497.9	16	60	1120			
	1.464933							
4	3	5497.9	16	60	1512		1537	
	2.245878							
5	1	5497.9	16	80				
	2.903056							
6	3	5497.9	16	50	1451		1615	
	3.644377							
7	3	5497.9	16	75	1906		1144	
	4.304878							
8	2	5497.9	16	65	1819			4.55892
9	1	5497.9	16	85				
	5.441826							
10	3	5497.9	16	55	1382		1194	
	5.904774							
11	3	5497.9	16	60	1096		1975	
	6.742632							
12	3	5497.9	16	95	1939		1239	
	7.027598							
13	3	5497.9	16	50	1114		1573	
	8.089678							
14	3	5497.9	16	60	1140		1937	
	8.478288							
15	3	5497.9	16	50	1263		1469	
	9.433406							
16	3	5497.9	16	50	1041		1369	9.92737
17	2	5497.9	16	80	1244			
	10.384314							
18	3	5497.9	16	70	1401		1513	
	11.115814							

19	3	5497.9	16	55	1172	1237	
	11.420191						

USA Bin 5 Trial #5

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)	PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	
	Pulse Start (S)						
1	2	5496.7	13	80	1496		
	0.541369						
2	1	5496.7	13	100			
	0.984343						
3	3	5496.7	13	100	1086	1036	
	1.389152						
4	3	5496.7	13	75	1736	1836	
	2.170943						
5	1	5496.7	13	50			
	2.762671						
6	1	5496.7	13	60			
	3.608121						
7	2	5496.7	13	60	1331		
	4.277218						
8	1	5496.7	13	100			
	5.156755						
9	1	5496.7	13	80			
	5.523548						
10	2	5496.7	13	65	1970		
	6.357488						
11	3	5496.7	13	50	1119	1490	
	6.719058						
12	2	5496.7	13	100	1504		
	7.712452						
13	1	5496.7	13	70			
	8.043744						
14	3	5496.7	13	100	1211	1849	
	9.211274						
15	3	5496.7	13	55	1193	1902	
	9.346321						
16	3	5496.7	13	70	1509	1613	
	10.102185						
17	2	5496.7	13	55	1070		
	11.244179						
18	3	5496.7	13	85	1900	1868	
	11.547083						

USA Bin 5 Trial #6

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)	PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	
	Pulse Start (S)						
1	2	5497.9	16	80	1038		
	0.639452						
2	1	5497.9	16	80			
	1.538205						
3	2	5497.9	16	60	1400		
	1.816007						
4	1	5497.9	16	95			
	2.733344						
5	2	5497.9	16	65	1785		
	3.248387						
6	2	5497.9	16	75	1609		
	4.664609						
7	3	5497.9	16	50	1368	1850	
	5.252519						
8	3	5497.9	16	55	1821	1799	
	6.173844						
9	2	5497.9	16	100	1779		
	6.843363						

10	1	5497.9	16	60				
	7.294342							
11	2	5497.9	16	100		1928		
	8.717161							
12	1	5497.9	16	55				
	9.176985							
13	1	5497.9	16	85				
	10.114673							
14	1	5497.9	16	85				
	10.558163							
15	2	5497.9	16	50		1634		
	11.782462							

USA Bin 5 Trial #7

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	
	Pulse Start (S)							
1	2	5493.9	6	75		1169		0.31269
2	1	5493.9	6	80				1.28477
3	3	5493.9	6	90		1797	1524	
	3.279039							
4	1	5493.9	6	80				
	3.943712							
5	3	5493.9	6	85		1167	1121	
	5.994955							
6	3	5493.9	6	75		1971	1709	
	6.815206							
7	3	5493.9	6	75		1185	1859	7.88185
8	3	5493.9	6	95		1742	1194	
	9.480673							
9	1	5493.9	6	75				9.79127
10	3	5493.9	6	95		1974	1795	
	10.855734							

USA Bin 5 Trial #8

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	
	Pulse Start (S)							
1	3	5497.5	15	55		1382	1342	
	0.522967							
2	3	5497.5	15	60		1959	1571	
	0.951262							
3	2	5497.5	15	80		1525		
	1.674195							
4	3	5497.5	15	50		1619	1874	2.58872
5	1	5497.5	15	55				
	3.542223							
6	2	5497.5	15	65		1320		
	3.990565							
7	2	5497.5	15	75		1927		
	5.037583							
8	1	5497.5	15	95				
	5.766325							
9	2	5497.5	15	85		1737		
	6.120006							
10	3	5497.5	15	65		1291	1325	
	6.888777							
11	2	5497.5	15	85		1947		
	8.082186							
12	1	5497.5	15	85				
	8.644788							
13	1	5497.5	15	60				
	9.058275							
14	3	5497.5	15	50		1789	1337	
	9.957968							

15	3	5497.5	15	95	1861	1067	
	11.11922						
16	3	5497.5	15	50	1967	1437	
	11.857335						

USA Bin 5 Trial #9

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)
	Pulse Start (S)						
1	1	5493.5	5	75			
	0.547706						
2	1	5493.5	5	80			
	2.721554						
3	1	5493.5	5	55			
	4.414568						
4	3	5493.5	5	85	1321	1826	
	4.757077						
5	2	5493.5	5	60	1808		
	6.765906						
6	3	5493.5	5	100	1449	1173	
	8.233273						
7	2	5493.5	5	100	1341		
	9.867155						
8	1	5493.5	5	50			
	11.919871						

USA Bin 5 Trial #10

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)
	Pulse Start (S)						
1	2	5500	9	55	1780		0.26351
2	2	5500	9	100	1739		
	2.126873						
3	2	5500	9	55	1480		
	3.085658						
4	3	5500	9	55	1364	1326	
	3.751129						
5	1	5500	9	90			4.87289
6	1	5500	9	85			
	6.584458						
7	3	5500	9	60	1004	1380	
	7.207172						
8	2	5500	9	75	1373		
	8.771091						
9	3	5500	9	85	1330	1599	
	10.110308						
10	1	5500	9	65			
	11.872366						

USA Bin 5 Trial #11

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)
	Pulse Start (S)						
1	1	5500	7	90			
	0.049368						
2	3	5500	7	85	1916	1761	
	0.945085						
3	1	5500	7	60			
	1.208415						
4	2	5500	7	90	1451		
	1.857969						
5	3	5500	7	95	1891	1075	
	2.574039						
6	2	5500	7	100	1391		
	3.384269						
7	2	5500	7	75	1333		
	3.650896						

8	2	5500	7	90	1795			
	4.520657							
9	1	5500	7	75				
	4.997907							
10	3	5500	7	85	1483	1690		
	5.898136							
11	1	5500	7	90				
	6.043372							
12	3	5500	7	55	1694	1993		
	6.913555							
13	3	5500	7	75	1235	1358		
	7.674635							
14	1	5500	7	70				7.92771
15	3	5500	7	75	1878	1075		
	8.782432							
16	3	5500	7	85	1630	1300		
	9.450947							
17	3	5500	7	75	1464	1552		
	10.171363							
18	1	5500	7	65				
	10.230601							
19	2	5500	7	65	1850			
	11.250075							
20	3	5500	7	70	1836	1323		
	11.444941							

USA Bin 5 Trial #12

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	
	Pulse Start (S)							
1	1	5500	9	85				
	0.824792							
2	1	5500	9	90				
	1.909437							
3	2	5500	9	50	1151			
	2.768501							
4	3	5500	9	100	1524	1939		
	3.356727							
5	3	5500	9	80	1337	1448		
	4.809769							
6	1	5500	9	95				
	5.399266							
7	3	5500	9	85	1282	1560		
	6.562965							
8	3	5500	9	95	1507	1980		
	7.179457							
9	1	5500	9	80				
	8.792038							
10	3	5500	9	55	1230	1565		
	9.397838							
11	3	5500	9	80	1389	1374		
	10.020521							
12	1	5500	9	90				
	11.455505							

USA Bin 5 Trial #13

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	
	Pulse Start (S)							
1	1	5500	9	75				
	0.178605							
2	2	5500	9	55	1781			
	0.925483							
3	2	5500	9	90	1094			
	1.960646							

4	2	5500	9	75	1997			2.412551
5	2	5500	9	65	1470			3.095285
6	1	5500	9	55				3.621538
7	3	5500	9	100	1472	1141		4.205187
8	3	5500	9	80	1148	1734		4.750896
9	1	5500	9	70				5.336286
10	2	5500	9	80	1164		6.50367	
11	1	5500	9	75				6.694559
12	1	5500	9	80				7.835627
13	2	5500	9	65	1439		8.49336	
14	3	5500	9	55	1906	1487		9.018846
15	3	5500	9	50	1544	1734	9.53253	
16	3	5500	9	85	1378	1158		10.462734
17	3	5500	9	95	1909	1210		11.177017
18	1	5500	9	70				11.47216

USA Bin 5 Trial #14

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)	PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)		Pulse Start (S)
1	3	5500	18	70	1036	1712		0.329917
2	3	5500	18	55	1062	1598		1.223086
3	3	5500	18	95	1882	1877		1.308942
4	3	5500	18	55	1947	1217		2.491519
5	2	5500	18	100	1722			2.851203
6	2	5500	18	70	1417			3.418636
7	2	5500	18	65	1563			3.935704
8	1	5500	18	80				4.922434
9	1	5500	18	60			5.44445	
10	1	5500	18	90			5.93774	
11	2	5500	18	85	1136			6.467341
12	1	5500	18	95				7.028648
13	3	5500	18	90	1247	1223		7.898071
14	1	5500	18	80				8.542686
15	2	5500	18	75	1027			9.432928
16	2	5500	18	75	1693			9.759372
17	1	5500	18	65				10.314344

18	3	5500	18	80		1277	1552	
	11.320789							
19	2	5500	18	70		1508		
	11.617762							

USA Bin 5 Trial #15

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)		Inter-pulse spacing (uS)
	Pulse Start (S)							
1	1	5500	5	95				
	0.520776							
2	1	5500	5	70				
	0.968551							
3	2	5500	5	95		1061		1.40804
4	2	5500	5	60		1450		
	2.002354							
5	3	5500	5	50		1712	1135	
	2.651615							
6	3	5500	5	85		1695	1654	
	3.409787							
7	1	5500	5	85				
	3.682302							
8	2	5500	5	50		1862		
	4.552484							
9	2	5500	5	50		1979		
	4.953789							
10	1	5500	5	55				
	5.440546							
11	1	5500	5	85				
	6.572098							
12	1	5500	5	55				6.88821
13	3	5500	5	50		1101	1419	
	7.392703							
14	3	5500	5	95		1103	1340	
	8.357921							
15	3	5500	5	95		1465	1710	8.9329
16	2	5500	5	95		1897		
	9.055537							
17	2	5500	5	70		1651		
	9.748034							
18	3	5500	5	90		1631	1283	
	10.20659							
19	1	5500	5	65				
	11.370467							
20	3	5500	5	90		1358	1934	
	11.908929							

USA Bin 5 Trial #16

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)		Inter-pulse spacing (uS)
	Pulse Start (S)							
1	3	5500	12	70		1375	1609	
	0.087832							
2	3	5500	12	65		1629	1872	
	0.983715							
3	1	5500	12	60				
	2.594671							
4	3	5500	12	90		1569	1609	3.56308
5	3	5500	12	85		1628	1538	
	4.390936							
6	1	5500	12	90				
	5.363878							
7	2	5500	12	80		1744		
	5.985467							
8	1	5500	12	100				
	7.214755							

9	2	5500	12	50	1394			
	7.848059							
10	1	5500	12	100				
	8.734788							
11	2	5500	12	60	1116			
	10.145814							
12	1	5500	12	70				
	10.47576							
13	1	5500	12	50				
	11.577113							

USA Bin 5 Trial #17

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	
	Pulse Start (S)							
1	3	5500	20	65	1801	1983		
	0.980697							
2	3	5500	20	80	1361	1427		
	1.786739							
3	2	5500	20	75	1704			
	4.025053							
4	1	5500	20	95				4.59376
5	3	5500	20	50	1771	1395		
	6.663674							
6	2	5500	20	75	1510			
	7.871237							
7	2	5500	20	75	1107			
	9.083499							
8	2	5500	20	70	1690			
	11.49789							

USA Bin 5 Trial #18

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	
	Pulse Start (S)							
1	3	5500	7	100	1538	1729		
	0.546591							
2	2	5500	7	60	1768			
	1.076081							
3	1	5500	7	50				1.71479
4	3	5500	7	90	1602	1069		
	1.913124							
5	3	5500	7	60	1468	1679		
	2.850234							
6	1	5500	7	100				
	3.161766							
7	1	5500	7	90				
	4.079147							
8	2	5500	7	75	1500			
	4.466964							
9	1	5500	7	75				4.86708
10	2	5500	7	75	1785			
	5.444725							
11	2	5500	7	75	1855			6.33836
12	3	5500	7	70	1293	1837		
	7.006584							
13	3	5500	7	50	1959	1390		
	7.503298							
14	3	5500	7	60	1082	1094		
	8.253374							
15	3	5500	7	85	1398	1662		
	8.496085							
16	3	5500	7	100	1650	1348		
	9.343928							
17	1	5500	7	90				
	10.123047							

18	1	5500	7	50			
	10.232223						
19	3	5500	7	80	1955	1564	
	10.838117						
20	3	5500	7	65	1277	1740	
	11.725124						

USA Bin 5 Trial #19

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)
	Pulse Start (S)						
1	3	5500	17	55	1799	1625	
	0.637906						
2	1	5500	17	50			
	0.670985						
3	3	5500	17	85	1461	1486	
	1.334962						
4	3	5500	17	50	1861	1082	2.05542
5	3	5500	17	60	1425	1200	
	3.159602						
6	1	5500	17	80			
	3.827589						
7	2	5500	17	55	1192		4.42415
8	2	5500	17	80	1350		
	5.142544						
9	3	5500	17	75	1014	1035	
	5.428281						
10	3	5500	17	85	1831	1535	6.44092
11	2	5500	17	90	1712		
	7.235542						
12	2	5500	17	80	1559		7.67018
13	2	5500	17	80	1712		
	8.473991						
14	2	5500	17	90	1934		
	9.179545						
15	1	5500	17	95			
	9.427179						
16	3	5500	17	55	1711	1484	
	10.249638						
17	2	5500	17	55	1816		
	11.184934						
18	1	5500	17	95			
	11.464467						

USA Bin 5 Trial #20

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)
	Pulse Start (S)						
1	1	5505.7	7	80			0.44482
2	3	5505.7	7	95	1316	1539	
	1.983112						
3	2	5505.7	7	75	1800		
	3.478571						
4	1	5505.7	7	90			
	4.225189						
5	3	5505.7	7	60	1172	1724	
	6.266327						
6	1	5505.7	7	100			
	7.543269						
7	3	5505.7	7	55	1056	1909	
	8.691032						
8	3	5505.7	7	85	1663	1893	
	10.458989						
9	3	5505.7	7	55	1503	1272	
	11.551391						

USA Bin 5 Trial #21

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)		Inter-pulse spacing (uS)
	Pulse Start (S)							
1	1	5501.3	18	65				
	0.308053							
2	1	5501.3	18	90				
	1.398212							
3	2	5501.3	18	60		1681		
	1.915212							
4	2	5501.3	18	65		1251		2.71035
5	1	5501.3	18	75				
	3.039548							
6	2	5501.3	18	70		1141		
	4.182466							
7	2	5501.3	18	85		1249		
	5.044475							
8	3	5501.3	18	65		1187	1400	
	5.550032							
9	3	5501.3	18	70		1016	1374	6.14058
10	1	5501.3	18	70				
	7.166559							
11	1	5501.3	18	100				
	7.893587							
12	3	5501.3	18	90		1075	1279	
	8.276834							
13	3	5501.3	18	80		1970	1643	9.02315
14	2	5501.3	18	75		1376		
	9.873422							
15	1	5501.3	18	100				
	11.148672							
16	1	5501.3	18	90				
	11.292238							

USA Bin 5 Trial #22

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)		Inter-pulse spacing (uS)
	Pulse Start (S)							
1	1	5503.3	13	100				
	0.086716							
2	2	5503.3	13	50		1649		
	1.312196							
3	2	5503.3	13	80		1714		
	1.962676							
4	2	5503.3	13	90		1278		
	3.261119							
5	3	5503.3	13	85		1933	1211	3.46399
6	2	5503.3	13	70		1959		
	4.841864							
7	1	5503.3	13	95				
	5.763317							
8	2	5503.3	13	100		1867		
	6.235495							
9	1	5503.3	13	70				
	7.316914							
10	2	5503.3	13	70		1578		
	7.902612							
11	2	5503.3	13	60		1824		
	9.036753							
12	2	5503.3	13	65		1088		
	9.692902							
13	3	5503.3	13	70		1989	1518	
	10.647095							
14	3	5503.3	13	65		1618	1788	
	11.664985							

USA Bin 5 Trial #23

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)		Inter-pulse spacing (uS)
	Pulse Start (S)							
1	1	5504.1	11	100				0.47666
2	2	5504.1	11	85		1834		
	1.600232							
3	1	5504.1	11	55				
	2.230242							
4	3	5504.1	11	80		1878	1191	
	3.154435							
5	1	5504.1	11	50				
	4.583868							
6	3	5504.1	11	60		1321	1989	
	4.903075							
7	2	5504.1	11	70		1832		
	5.628491							
8	2	5504.1	11	95		1329		
	6.537412							
9	2	5504.1	11	75		1430		7.58415
10	3	5504.1	11	90		1666	1111	
	9.005612							
11	2	5504.1	11	60		1702		
	9.670648							
12	2	5504.1	11	50		1516		
	10.529851							
13	3	5504.1	11	90		1087	1205	
	11.88401							

USA Bin 5 Trial #24

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)		Inter-pulse spacing (uS)
	Pulse Start (S)							
1	2	5503.3	13	80		1276		
	0.130671							
2	2	5503.3	13	50		1845		
	0.960592							
3	1	5503.3	13	95				
	1.732395							
4	1	5503.3	13	85				
	1.959536							
5	3	5503.3	13	90		1638	1921	
	2.928177							
6	2	5503.3	13	65		1628		
	3.760693							
7	1	5503.3	13	100				
	3.920163							
8	2	5503.3	13	75		1389		
	4.459174							
9	1	5503.3	13	55				
	5.163978							
10	3	5503.3	13	50		1840	1882	
	6.057497							
11	1	5503.3	13	55				
	6.373144							
12	1	5503.3	13	70				
	6.986286							
13	1	5503.3	13	90				
	7.861238							
14	1	5503.3	13	70				
	8.820694							
15	3	5503.3	13	60		1696	1460	
	9.367003							
16	2	5503.3	13	65		1069		
	9.595306							

17	1	5503.3	13	50			
	10.463989						
18	1	5503.3	13	65			
	10.890536						
19	2	5503.3	13	55	1365		
	11.717062						

USA Bin 5 Trial #25

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)
	Pulse Start (S)						
1	2	5504.5	10	60	1568		
	0.108586						
2	3	5504.5	10	90	1655	1736	
	0.821321						
3	3	5504.5	10	75	1299	1263	
	1.276551						
4	1	5504.5	10	75			
	2.489636						
5	1	5504.5	10	90			
	2.578074						
6	3	5504.5	10	85	1601	1979	
	3.685812						
7	1	5504.5	10	95			
	4.289705						
8	3	5504.5	10	95	1603	1420	
	5.036241						
9	2	5504.5	10	90	1284		
	5.091988						
10	2	5504.5	10	65	1292		
	6.172268						
11	2	5504.5	10	100	1730		
	6.746758						
12	1	5504.5	10	65			
	6.988095						
13	3	5504.5	10	100	1738	1263	
	7.711353						
14	2	5504.5	10	50	1427		
	8.236551						
15	3	5504.5	10	85	1271	1032	
	9.093536						
16	1	5504.5	10	60			
	9.580843						
17	2	5504.5	10	55	1702		
	10.601098						
18	1	5504.5	10	95			
	10.744203						
19	2	5504.5	10	70	1988		
	11.794542						

USA Bin 5 Trial #26

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)
	Pulse Start (S)						
1	3	5505.7	7	90	1011	1648	
	0.064714						
2	3	5505.7	7	90	1896	1892	
	1.531968						
3	2	5505.7	7	80	1932		
	1.921469						
4	3	5505.7	7	85	1324	1681	
	3.285242						
5	1	5505.7	7	80			
	3.863626						
6	3	5505.7	7	70	1198	1027	
	4.668437						

7	2	5505.7	7	55	1256		5.692409
8	2	5505.7	7	85	1689		6.905485
9	1	5505.7	7	55			8.095232
10	1	5505.7	7	60			8.823034
11	3	5505.7	7	60	1480	1872	9.616464
12	2	5505.7	7	100	1215		10.901277
13	3	5505.7	7	70	1850	1257	11.253638

USA Bin 5 Trial #27

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	Pulse Start (S)
1	2	5503.3	13	80	1661			0.564627
2	1	5503.3	13	75				0.913655
3	3	5503.3	13	75	1961	1740		1.331688
4	2	5503.3	13	50	1106			2.221662
5	3	5503.3	13	100	1931	1709		2.908934
6	1	5503.3	13	80				3.278696
7	1	5503.3	13	65				3.818188
8	3	5503.3	13	60	1248	1791		4.511015
9	1	5503.3	13	80				5.037392
10	3	5503.3	13	95	1196	1195		5.620116
11	1	5503.3	13	50				6.089781
12	3	5503.3	13	85	1699	1410		7.114468
13	2	5503.3	13	60	1661			7.760138
14	3	5503.3	13	55	1114	1540		7.858455
15	3	5503.3	13	60	1301	1842		8.449588
16	3	5503.3	13	90	1898	1040		9.257805
17	1	5503.3	13	60				9.929058
18	2	5503.3	13	75	1281			10.308097
19	3	5503.3	13	80	1550	1511		11.159091
20	1	5503.3	13	90				11.44422

USA Bin 5 Trial #28

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)		PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)	Pulse Start (S)
1	3	5504.5	10	65	1135	1240		0.060637

2	2	5504.5	10	55	1425			1.200589
3	2	5504.5	10	85	1419			1.938272
4	2	5504.5	10	55	1149			2.208317
5	3	5504.5	10	65	1382	1664		3.120892
6	3	5504.5	10	75	1533	1129		3.854063
7	3	5504.5	10	55	1386	1054		4.475108
8	2	5504.5	10	95	1822			5.324572
9	2	5504.5	10	95	1996		6.08462	
10	2	5504.5	10	85	1133			7.001185
11	2	5504.5	10	65	1630			7.335523
12	3	5504.5	10	60	1969	1762		8.388507
13	2	5504.5	10	95	1080			9.072777
14	3	5504.5	10	75	1921	1369		9.781956
15	1	5504.5	10	95				10.158278
16	1	5504.5	10	85				11.074762
17	1	5504.5	10	70				11.371735

USA Bin 5 Trial #29

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)	PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)		Pulse Start (S)
1	3	5503.3	13	50	1888	1618		0.242808
2	1	5503.3	13	55				1.151507
3	2	5503.3	13	100	1566			1.686264
4	3	5503.3	13	100	1344	1652		2.544849
5	2	5503.3	13	65	1910			2.778809
6	3	5503.3	13	55	1851	1406	3.6575	
7	1	5503.3	13	100				4.479003
8	1	5503.3	13	55				5.049422
9	3	5503.3	13	60	1587	1028		5.855437
10	2	5503.3	13	80	1613			6.197429
11	2	5503.3	13	95	1923			6.731922
12	3	5503.3	13	50	1137	1546		7.581273
13	3	5503.3	13	85	1189	1065		8.445823
14	3	5503.3	13	55	1850	1886		9.151001

15	3	5503.3	13	100	1197	1287
	9.566604					
16	1	5503.3	13	50		
	10.290877					
17	2	5503.3	13	50	1141	
	11.293512					
18	3	5503.3	13	95	1020	1075
	11.780568					

USA Bin 5 Trial #30

Burst #	Pulses	Frequency (MHz)	Chirp (MHz)	PW (uS)	Inter-pulse spacing (uS)	Inter-pulse spacing (uS)
	Pulse Start (S)					
1	2	5496.3	12	80	1812	
	0.362634					
2	1	5496.3	12	70		
	0.674689					
3	1	5496.3	12	75		
	1.435634					
4	1	5496.3	12	65		
	2.098304					
5	2	5496.3	12	75	1725	
	2.599167					
6	2	5496.3	12	55	1220	
	3.371616					
7	1	5496.3	12	80		
	3.937407					
8	2	5496.3	12	90	1683	
	4.964664					
9	2	5496.3	12	85	1885	
	5.287461					
10	1	5496.3	12	90		
	5.936552					
11	2	5496.3	12	90	1085	
	6.402385					
12	2	5496.3	12	85	1595	
	7.323662					
13	2	5496.3	12	85	1879	
	7.713119					
14	2	5496.3	12	60	1125	
	8.472074					
15	2	5496.3	12	65	1968	
	8.948455					
16	2	5496.3	12	60	1513	
	9.524601					
17	2	5496.3	12	100	1335	
	10.61421					
18	3	5496.3	12	100	1336	1227
	11.049943					
19	2	5496.3	12	50	1377	
	11.649123					

*See the Bin6 Radar Characteristics at the end of this report.

USA Frequency Hopping Radar Statistical Performance

Trial #	Name	1=Detection 0=No Detection	Detection Percentage	Limit
1	USA Bin 6 Radar Test 1	1	90.0%	70.0%
2	USA Bin 6 Radar Test 2	1		
3	USA Bin 6 Radar Test 3	1		
4	USA Bin 6 Radar Test 4	1		
5	USA Bin 6 Radar Test 5	1		
6	USA Bin 6 Radar Test 6	1		
7	USA Bin 6 Radar Test 7	0		
8	USA Bin 6 Radar Test 8	1		
9	USA Bin 6 Radar Test 9	1		
10	USA Bin 6 Radar Test 10	1		
11	USA Bin 6 Radar Test 11	0		
12	USA Bin 6 Radar Test 12	1		
13	USA Bin 6 Radar Test 13	1		
14	USA Bin 6 Radar Test 14	0		
15	USA Bin 6 Radar Test 15	1		
16	USA Bin 6 Radar Test 16	1		
17	USA Bin 6 Radar Test 17	1		
18	USA Bin 6 Radar Test 18	1		
19	USA Bin 6 Radar Test 19	1		
20	USA Bin 6 Radar Test 20	1		
21	USA Bin 6 Radar Test 21	1		
22	USA Bin 6 Radar Test 22	1		
23	USA Bin 6 Radar Test 23	1		
24	USA Bin 6 Radar Test 24	1		
25	USA Bin 6 Radar Test 25	1		
26	USA Bin 6 Radar Test 26	1		
27	USA Bin 6 Radar Test 27	1		
28	USA Bin 6 Radar Test 28	1		
29	USA Bin 6 Radar Test 29	1		
30	USA Bin 6 Radar Test 30	1		

USA Frequency Hopping Trial #1

Hop #	Freq (GHz)	Pulse Start (mS)
9	5493	27
46	5492	138
64	5498	192
97	5505	291

USA Frequency Hopping Trial #2

Hop #	Freq (GHz)	Pulse Start (mS)
31	5502	93
45	5501	135
71	5499	213
73	5492	219
87	5507	261

USA Frequency Hopping Trial #3

Hop #	Freq (GHz)	Pulse Start (mS)
5	5501	15
9	5502	27
20	5506	60
49	5504	147
62	5503	186

USA Frequency Hopping Trial #4

Hop #	Freq (GHz)	Pulse Start (mS)
34	5508	102
69	5503	207
92	5502	276
96	5493	288

USA Frequency Hopping Trial #5

Hop #	Freq (GHz)	Pulse Start (mS)
6	5496	18
28	5501	84
29	5495	87
69	5508	207
90	5500	270

USA Frequency Hopping Trial #6

Hop #	Freq (GHz)	Pulse Start (mS)
18	5498	54

USA Frequency Hopping Trial #7

Hop #	Freq (GHz)	Pulse Start (mS)
27	5500	81
43	5504	129

USA Frequency Hopping Trial #8

Hop #	Freq (GHz)	Pulse Start (mS)
3	5493	9
79	5500	237
81	5501	243
84	5492	252

USA Frequency Hopping Trial #9

Hop #	Freq (GHz)	Pulse Start (mS)
8	5492	24

44	5502	132
54	5506	162
70	5503	210
85	5507	255

USA Frequency Hopping Trial #10

Hop #	Freq (GHz)	Pulse Start (mS)
7	5496	21
13	5500	39
22	5502	66
71	5503	213
74	5505	222

USA Frequency Hopping Trial #11

Hop #	Freq (GHz)	Pulse Start (mS)
44	5502	132
73	5499	219
78	5498	234

USA Frequency Hopping Trial #12

Hop #	Freq (GHz)	Pulse Start (mS)
12	5501	36
14	5504	42
73	5507	219
76	5508	228

USA Frequency Hopping Trial #13

Hop #	Freq (GHz)	Pulse Start (mS)
6	5502	18
74	5499	222
94	5501	282

USA Frequency Hopping Trial #14

Hop #	Freq (GHz)	Pulse Start (mS)
14	5508	42
18	5501	54

USA Frequency Hopping Trial #15

Hop #	Freq (GHz)	Pulse Start (mS)
90	5493	270

USA Frequency Hopping Trial #16

Hop #	Freq (GHz)	Pulse Start (mS)
3	5498	9
10	5493	30
28	5507	84
33	5494	99

USA Frequency Hopping Trial #17

Hop #	Freq (GHz)	Pulse Start (mS)
7	5493	21
23	5498	69
47	5496	141
70	5500	210
87	5501	261
88	5507	264

USA Frequency Hopping Trial #18

Hop #	Freq (GHz)	Pulse Start (mS)
0	5503	0
43	5499	129
68	5508	204
88	5507	264

USA Frequency Hopping Trial #19

Hop #	Freq (GHz)	Pulse Start (mS)
14	5498	42
24	5492	72
82	5494	246
86	5496	258
97	5507	291

USA Frequency Hopping Trial #20

Hop #	Freq (GHz)	Pulse Start (mS)
3	5505	9
40	5502	120
45	5503	135

USA Frequency Hopping Trial #21

Hop #	Freq (GHz)	Pulse Start (mS)
12	5498	36
54	5508	162
58	5506	174

USA Frequency Hopping Trial #22

Hop #	Freq (GHz)	Pulse Start (mS)
16	5500	48
38	5505	114
48	5508	144
69	5506	207
71	5494	213
95	5496	285

USA Frequency Hopping Trial #23

Hop #	Freq (GHz)	Pulse Start (mS)
0	5500	0
67	5506	201

USA Frequency Hopping Trial #24

Hop #	Freq (GHz)	Pulse Start (mS)
38	5506	114
45	5498	135
78	5501	234

USA Frequency Hopping Trial #25

Hop #	Freq (GHz)	Pulse Start (mS)
59	5492	177

USA Frequency Hopping Trial #26

Hop #	Freq (GHz)	Pulse Start (mS)
17	5502	51
44	5499	132

USA Frequency Hopping Trial #27

Hop #	Freq (GHz)	Pulse Start (mS)
21	5501	63

48	5492	144
62	5507	186
94	5500	282

USA Frequency Hopping Trial #28

Hop #	Freq (GHz)	Pulse Start (mS)
3	5503	9
17	5502	51
18	5508	54
38	5498	114
91	5500	273

USA Frequency Hopping Trial #29

Hop #	Freq (GHz)	Pulse Start (mS)
17	5506	51
44	5500	132
90	5493	270

USA Frequency Hopping Trial #30

Hop #	Freq (GHz)	Pulse Start (mS)
19	5495	57
49	5496	147
87	5502	261

Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due
CIS-54303	Keysight / N5182B	MXG Signal Generator	09-Mar-15	09-Mar-16
CIS-49514	National Instruments /PXI-1042	DFS Automation System	Cal before Use	Cal before Use
	National Instruments /PXI-5422	16-Bit 200MS/s AWG	Cal before Use	Cal before Use
	National Instruments /PXI-5422	16-Bit 200MS/s AWG	Cal before Use	Cal before Use
	National Instruments /PXI-2796	40GHz Dual 6x1 Multiplex	Cal before Use	Cal before Use
CIS050721	N9030A Keysight	PXA Signal Analyzer	13-Apr-15	13-Apr-16
CIS054662	SF18-S1S1-36 MegaPhase	SMA 36" cable	24-Jun-15	24-Jun-16
CIS054661	BWS30-W2 Aeroflex	SMA 30dB Attenuator	24-Jun-15	24-Jun-16
CIS054660	BWS20-W2 Aeroflex	SMA 20dB Attenuator	24-Jun-15	24-Jun-16
CIS054659	PS4-09-452/4S Pulsar	Splitter	24-Jun-15	24-Jun-16
CIS054657	ZFSC-2-10G Mini-Circuits	Splitter	24-Jun-15	24-Jun-16
CIS054678	RA08-S1S1-12 MegaPhase	SMA 12" Cable	24-Jun-15	24-Jun-16
CIS054668	RA08-S1S1-18 MegaPhase	SMA 18" Cable	24-Jun-15	24-Jun-16
CIS054667	RA08-S1S1-18 MegaPhase	SMA 18" Cable	24-Jun-15	24-Jun-16
CIS054665	RA08-S1S1-24 MegaPhase	SMA 24" Cable	24-Jun-15	24-Jun-16
CIS054663	F120-S1S1-48 MegaPhase	SMA 48" Cable	24-Jun-15	24-Jun-16
CIS054686	NI PXI-2796 National Instruments	Plug-in switch module	6-Oct-15	6-Oct-16
CIS-49514	National Instruments /PXI-1042	DFS Automation System	Cal before Use	Cal before Use
CIS-49514	National Instruments /PXI-5422	16-Bit 200MS/s AWG	Cal before Use	Cal before Use
CIS-49514	National Instruments /PXI-5422	16-Bit 200MS/s AWG	Cal before Use	Cal before Use
CIS054658	D3C2060 Ditom	Circulator	20-Oct-15	20-Oct-16

END