

FCC DFS Test Report

Equipment : Computer
Brand Name : Advantech
Model No. : DLT-V4108xxxxxxxxxx (where "x" may be any alphanumeric character, "-" or blank.)
FCC ID : M82-DLV4108
Standard : 47 CFR FCC Part 15.407
RF Specification : DFS
Frequency : 5250 MHz – 5350 MHz
5470 MHz – 5725 MHz
Applicant / Manufacturer : Advantech Co., Ltd.
No.1, Alley 20, Lane 26, Rueiguang Rd., Neihu District, Taipei City, Taiwan, R.O.C.

The product sample received on Dec. 26, 2016 and completely tested on Dec. 27, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in KDB 905462 D02 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Phoenix Chen / Assistant Manager





Table of Contents

| | | |
|----------|--|-----------|
| 1 | GENERAL DESCRIPTION | 5 |
| 1.1 | Information..... | 5 |
| 1.2 | Testing Applied Standards | 6 |
| 1.3 | Testing Location Information | 6 |
| 1.4 | Measurement Uncertainty | 7 |
| 2 | TEST CONFIGURATION OF EUT..... | 8 |
| 2.1 | DFS and TPC Information | 8 |
| 2.2 | The Worst Case Measurement Configuration..... | 8 |
| 2.3 | Accessory and Support Equipment..... | 8 |
| 3 | DYNAMIC FREQUENCY SELECTION (DFS) TEST RESULT | 9 |
| 3.1 | General DFS Information | 9 |
| 3.2 | Radar Test Waveform Calibration | 11 |
| 3.3 | In-service Monitoring | 15 |
| 4 | TEST EQUIPMENT AND CALIBRATION DATA..... | 19 |

APPENDIX A. TEST PHOTOS



Summary of Test Result

| Conformance Test Specifications | | | | | |
|---------------------------------|------------------|--|---|------------------------------------|----------|
| Report Clause | Ref. Std. Clause | Description | Measured | Limit | Result |
| - | 7.8.1 | DFS: UNII Detection Bandwidth Measurement | N/A (Client w/o test) | 80% of the 99% BW | N/A |
| - | 7.8.2.1 | DFS: Initial Channel Availability Check Time | N/A (Client w/o test) | CAC ≥ 60 sec | N/A |
| - | 7.8.2.2 | DFS: Radar Burst at the Beginning of the Channel Availability Check Time | N/A (Client w/o test) | Detection Threshold: -64 dBm | N/A |
| - | 7.8.2.3 | DFS: Radar Burst at the End of the Channel Availability Check Time | N/A (Client w/o test) | Detection Threshold: -64 dBm | N/A |
| 3.3 | 7.8.3 | DFS: In-Service Monitoring for Channel Move Time (CMT) | CMT < 10sec | CMT ≤ 10sec | Complied |
| 3.3 | 7.8.3 | DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT) | CCTT < 60 ms | CCTT ≤ 60 ms starting at CMT 200ms | Complied |
| 3.3 | 7.8.3 | DFS: In-Service Monitoring for Non-Occupancy Period (NOP) | NOP > 30 min | NOP ≥ 30 min | Complied |
| - | 7.8.4 | DFS: Statistical Performance Check | N/A (Client w/o test) | Table 5 - 7 (KDB 905462) | N/A |
| 3.1.4 | 8.1 | User Access Restrictions | Manufacturer attestation NOT accessible to user | DFS controls | Complied |



Revision History

| Report No. | Version | Description | Issued Date |
|-------------------|----------------|-------------------------|--------------------|
| FZ6N1001AW | Rev. 01 | Initial issue of report | Mar. 29, 2017 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

1 General Description

1.1 Information

1.1.1 RF General Information

| IEEE Std. 802.11 | Channel Bandwidth (MHz) |
|------------------|-------------------------|
| 11a, n (HT20) | 20 |
| n (HT40) | 40 |

Note 1: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Information

| Antenna Category | |
|-------------------------------------|---|
| <input type="checkbox"/> | Equipment placed on the market without antennas |
| <input checked="" type="checkbox"/> | Integral antenna (antenna permanently attached) |
| <input checked="" type="checkbox"/> | Temporary RF connector provided |
| <input type="checkbox"/> | No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path. |
| <input checked="" type="checkbox"/> | External antenna (dedicated antennas) |
| <input checked="" type="checkbox"/> | Single power level with corresponding antenna(s). |
| <input type="checkbox"/> | Multiple power level and corresponding antenna(s). |

| Antenna General Information | | | | |
|-----------------------------|-----------|------------------------|-----------------|------------------------|
| No. | Ant. Cat. | Ant. Type | Model | G _{ANT} (dBi) |
| 1 | External | PIFA (connector : Yes) | MA231.LBC.002 | 2.84 |
| 2 | Integral | PCB (connector : Yes) | DL-WFAK79377500 | 6.50 |

For conducted tests, antenna ports are used for the tests and Master lowest antenna gain 2dBi that was used to set the DFS Detection Threshold level during calibration of the test setup.



1.1.3 Type of EUT

| Identify EUT | |
|-------------------------------------|---|
| Presentation of Equipment | <input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype |
| Type of EUT | |
| <input checked="" type="checkbox"/> | Stand-alone |
| <input type="checkbox"/> | Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: |
| <input type="checkbox"/> | Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: |
| <input type="checkbox"/> | Other: |

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ KDB 905462 D02 v02
- ♦ KDB 905462 D03 v01r02
- ♦ 47 CFR FCC Part 15.407

1.3 Testing Location Information

| Testing Location | | | | |
|-------------------------------------|---------------|---------------|--|-------------|
| <input checked="" type="checkbox"/> | HWA YA | ADD | : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan, R.O.C. | |
| | | TEL | : 886-3-327-3456 FAX : 886-3-327-0973 | |
| Test Condition | Test Site No. | Test Engineer | Test Environment | Test Date |
| DFS Site | DFS01-HY | Eddy Dai | 22.8°C / 57.6% | 27/Dec/2016 |

Test site registered number [553509] with FCC



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Measurement Uncertainty | |
|-------------------------------|--------------------------|
| Test Item | Uncertainty |
| Radio frequency | $\pm 8.7 \times 10^{-7}$ |
| RF output power, conducted | ± 0.6 dB |
| All emissions, conducted | ± 0.8 dB |
| All emissions, radiated | ± 2.8 dB |
| Temperature | ± 0.8 °C |
| Humidity | ± 3 % |
| DC and low frequency voltages | ± 3 % |
| Time | ± 1.4 % |

2 Test Configuration of EUT

2.1 DFS and TPC Information

| The DFS Related Operating Mode(s) of the Equipment | | | |
|--|---|------------------------------|--------------|
| <input type="checkbox"/> Master | | | |
| <input type="checkbox"/> Client with radar detection | | | |
| <input checked="" type="checkbox"/> Client without radar detection | | | |
| Software / Firmware Version | | 10.0.0.287 | |
| IEEE Std. 802.11 | Frequency Range (MHz) | TPC (Transmit Power Control) | Passive Scan |
| 11a n (HT20/HT40) | <input checked="" type="checkbox"/> 5250-5350 | Yes | Yes |
| | <input checked="" type="checkbox"/> 5470-5725 | Yes | Yes |
| | <input type="checkbox"/> 5600-5650 | - | - |

2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests | |
|---|--|
| Tests Item | Dynamic Frequency Selection (DFS) |
| Test Condition | Conducted measurement at transmit chains |
| Modulation Mode | |
| HT20, HT40 | |

2.3 Accessory and Support Equipment

| Specification of Accessory | | |
|---|------------|------------|
| A cable MDR 50P/BNC+Audio Jack*3+USB-A+D-SUB 9P | Model Name | 1700019307 |

Note: Regarding to more detail and other information, please refer to user manual.

| Support Equipment | | | | |
|-------------------|----------------|------------|----------------|---------------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| 1 | AP (Master) | EDIMAX | EW-7679WAC | NDD9576791401 |
| 2 | NoteBook | Dell | Latitude E5550 | - |
| 3 | Adapter for NB | Dell | FA90PSO-00 | - |

3 Dynamic Frequency Selection (DFS) Test Result

3.1 General DFS Information

3.1.1 DFS Parameters

| Table D.1: DFS requirement values | |
|-----------------------------------|---|
| Parameter | Value |
| Non-occupancy period | Minimum 30 minutes |
| Channel Availability Check Time | 60 seconds |
| Channel Move Time | 10 seconds See Note 1. |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. See Notes 1 and 2. |
| U-NII Detection Bandwidth | Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3. |

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

| Table D.2: Interference threshold values | |
|--|-------------------------------|
| Maximum Transmit Power | Value (See Notes 1, 2, and 3) |
| EIRP ≥ 200 milliwatt | -64 dBm |
| EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz | -62 dBm |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement | -64 dBm |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.



3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

| Requirement | DFS Operational mode | | |
|--|----------------------|--------------------------------|-----------------------------|
| | Master | Client without radar detection | Client with radar detection |
| <i>Non-Occupancy Period</i> | Yes | Not required | Yes |
| <i>DFS Detection Threshold</i> | Yes | Not required | Yes |
| <i>Channel Availability Check Time</i> | Yes | Not required | Not required |
| <i>U-NII Detection Bandwidth</i> | Yes | Not required | Yes |

3.1.3 Applicability of DFS Requirements during Normal Operation

| Requirement | DFS Operational mode | | |
|--|----------------------|--------------------------------|-----------------------------|
| | Master | Client without radar detection | Client with radar detection |
| <i>DFS Detection Threshold</i> | Yes | Not required | Yes |
| <i>Channel Closing Transmission Time</i> | Yes | Yes | Yes |
| <i>Channel Move Time</i> | Yes | Yes | Yes |
| <i>U-NII Detection Bandwidth</i> | Yes | Not required | Yes |

3.1.4 User Access Restrictions

| User Access Restrictions | |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | DFS controls (hardware or software) related to radar detection are NOT accessible to the user. Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user. |

3.1.5 Channel Loading/Data Streaming

| | |
|--|--|
| <input checked="" type="checkbox"/> | IP Based (Load Based) - stream the test file from the Master to the Client. |
| <input type="checkbox"/> | Performed NTIA approved WAV file. (EUT w/o video function application) |
| <input type="checkbox"/> | Performed NTIA approved MPEG2 file. (EUT with video function application) |
| <input checked="" type="checkbox"/> | Alternative streaming e.g., FTP with about 17 to 20% loading and submit proposal to FCC. |
| <input type="checkbox"/> | Frame Based - stream the test file from the Master to the Client. |
| <input type="checkbox"/> | fixed talk/listen ratio, set the ratio to 45%/55% |
| NTIA test file refer as: http://ntiacsd.ntia.doc.gov/dfs/ | |



3.2 Radar Test Waveform Calibration

3.2.1 Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (µsec) | PRI (µsec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Trials |
|--|--------------------|---|--|--|----------------|
| 0 | 1 | 1428 | 18 | See Note 1 | See Note 1 |
| 1 | 1 | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a | $\text{Roundup} \left\{ \begin{array}{l} \left(\frac{1}{360} \right) \cdot \\ \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$ | 60% | 30 |
| | | Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A | | | |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. | | | | | |

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

3.2.2 Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (µsec) | Chirp Width (MHz) | PRI (µsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--|----------------|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

Each waveform is defined as follows:

- ♦ The transmission period for the Long Pulse Radar test signal is 12 seconds.
- ♦ There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- ♦ Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- ♦ The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- ♦ Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- ♦ If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- ♦ The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

3.2.3 Frequency Hopping Radar Test Waveform


| Radar Type | Pulse Width (µsec) | PRI (µsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (ms) | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|------------|----------------|--------------------|------------------------------|--|----------------|
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 |

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.

3.2.4 Master DFS Threshold Level


| Master DFS Threshold Level | |
|--|--|
| DFS Threshold level: -62 dBm | <input checked="" type="checkbox"/> at the antenna connector |
| | <input type="checkbox"/> in front of the antenna |
| The Interference Radar Detection Threshold Level is $(-64\text{dBm}) + \{2\text{ dB}\} = -62\text{dBm}$. That had been taken into account the master output power range and antenna gain. | |

3.2.5 Calibration Setup

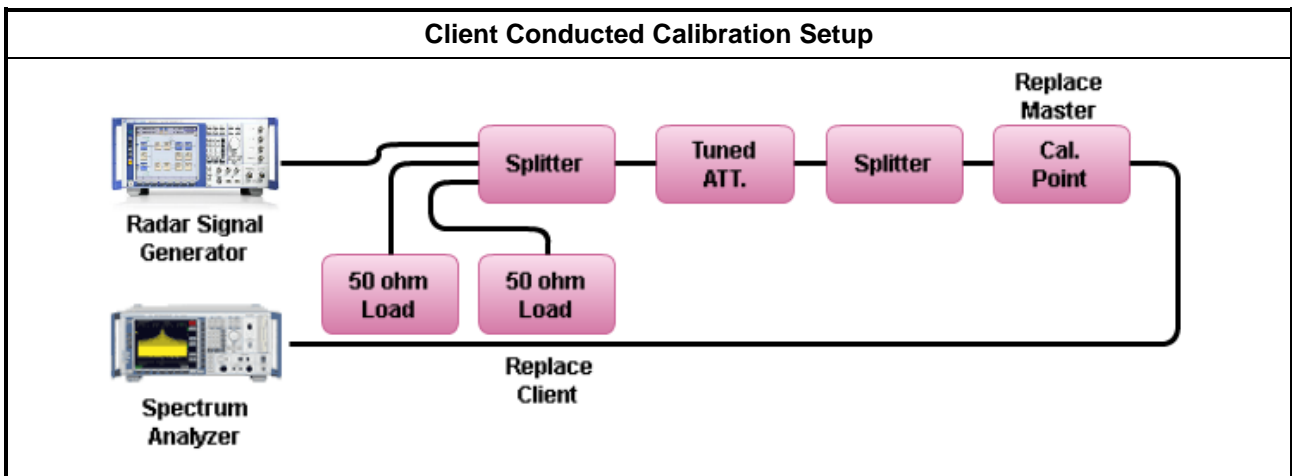




Calibration Plots

Calibration Radar #0 detection threshold level

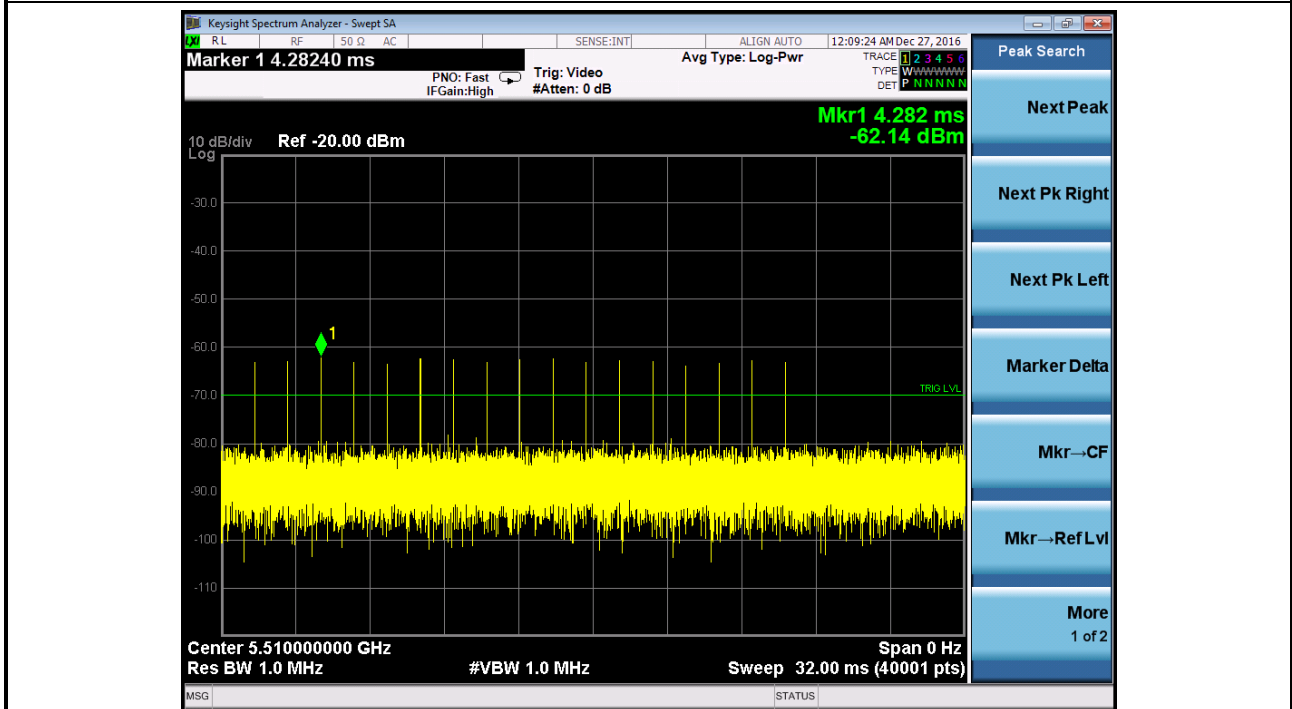

3.2.6 Test Setup

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

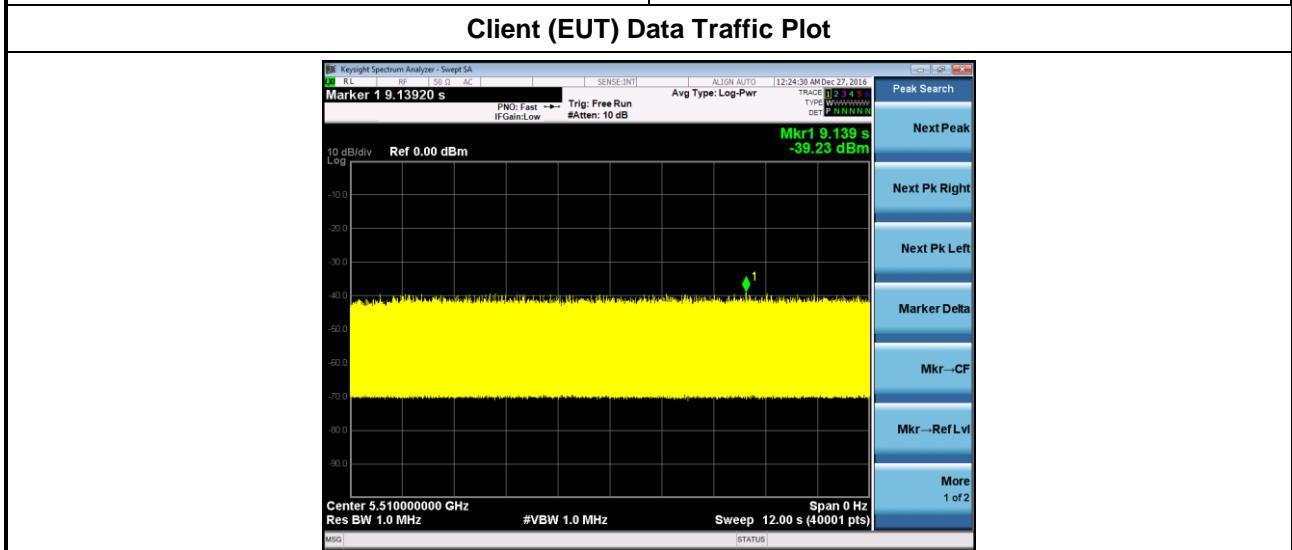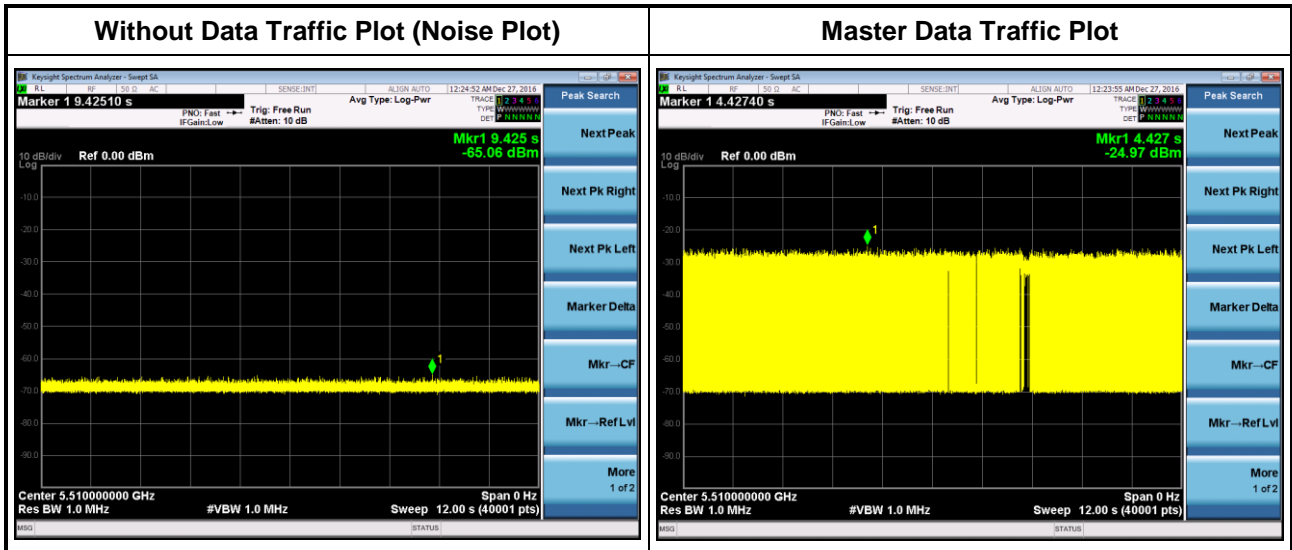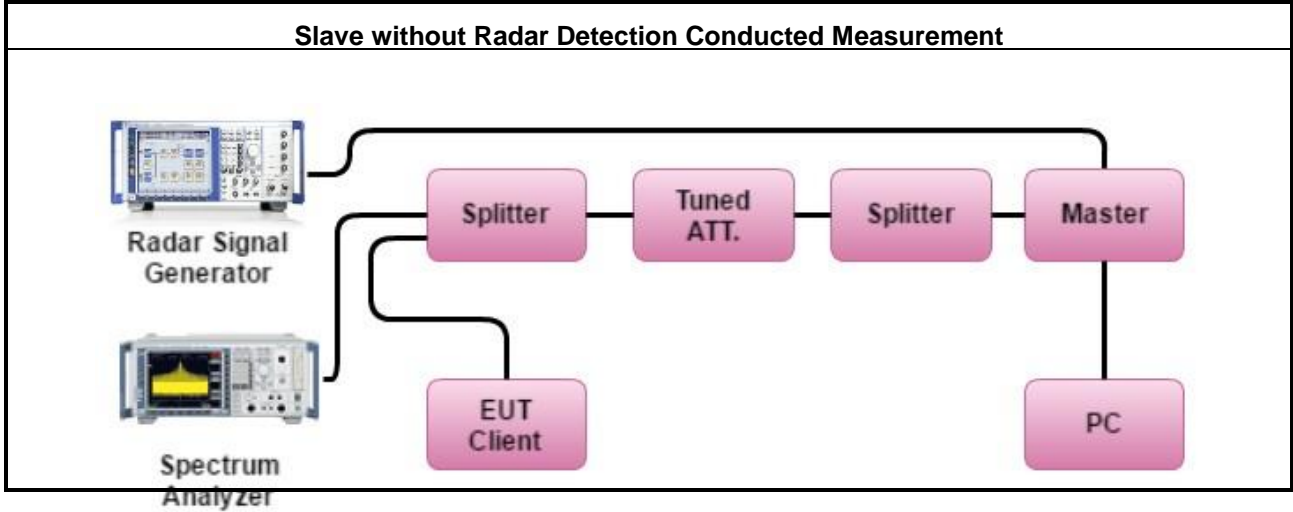



3.3 In-service Monitoring

3.3.1 In-service Monitoring Limit

| In-service Monitoring Limit | |
|-----------------------------------|---|
| Channel Move Time | 10 sec |
| Channel Closing Transmission Time | 200 ms + an aggregate of 60 ms over remaining 10 sec periods. |
| Non-occupancy period | Minimum 30 minutes |

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


| Test Method | |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | Refer as KDB 905462 D02 v02, clause 7.8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits. |
| <input checked="" type="checkbox"/> | Refer as KDB 905462 D02 v02, clause 8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 10 sec plot needs to be reported for the Short Pulse Radar Types 0 and one for the Long Pulse Radar Type in a 22 sec plot. And zoom-in a 600 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move. |
| <input checked="" type="checkbox"/> | Refer as KDB 905462 D02 v02, clause 7.8.3 verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits. |




3.3.4 Test Result of In-service Monitoring

| Test Result of Channel Closing Transmission Time and Channel Move Time | | | | | | | | |
|--|-------------|------------|-----------------------------------|-----------------|------------------|-------------------|-------------------|-------|
| Modulation Mode | Freq. (MHz) | Radar Type | Channel Closing Transmission Time | | | | Channel Move Time | |
| | | | Test (0-200ms) | Limit (0-200ms) | Test (200ms-10s) | Limit (200ms-10s) | Test | Limit |
| HT20 | 5500 | 0 | < 200ms | 200ms | 0s | 60ms | 177.9ms | 10 s |
| HT40 | 5510 | 0 | < 200ms | 200ms | 2.1ms | 60ms | 3.756s | 10 s |
| Test Result of Non-Occupancy Period | | | | | | | | |
| Modulation Mode | Freq. (MHz) | | Non-Occupancy Period | | | | | |
| | | | Measured | Limit | Result | | | |
| HT20 | 5500 | | >30min | 30min | Complied | | | |
| HT40 | 5510 | | >30min | 30min | Complied | | | |

3.3.5 Test result of Channel Closing Transmission Time and Channel Move

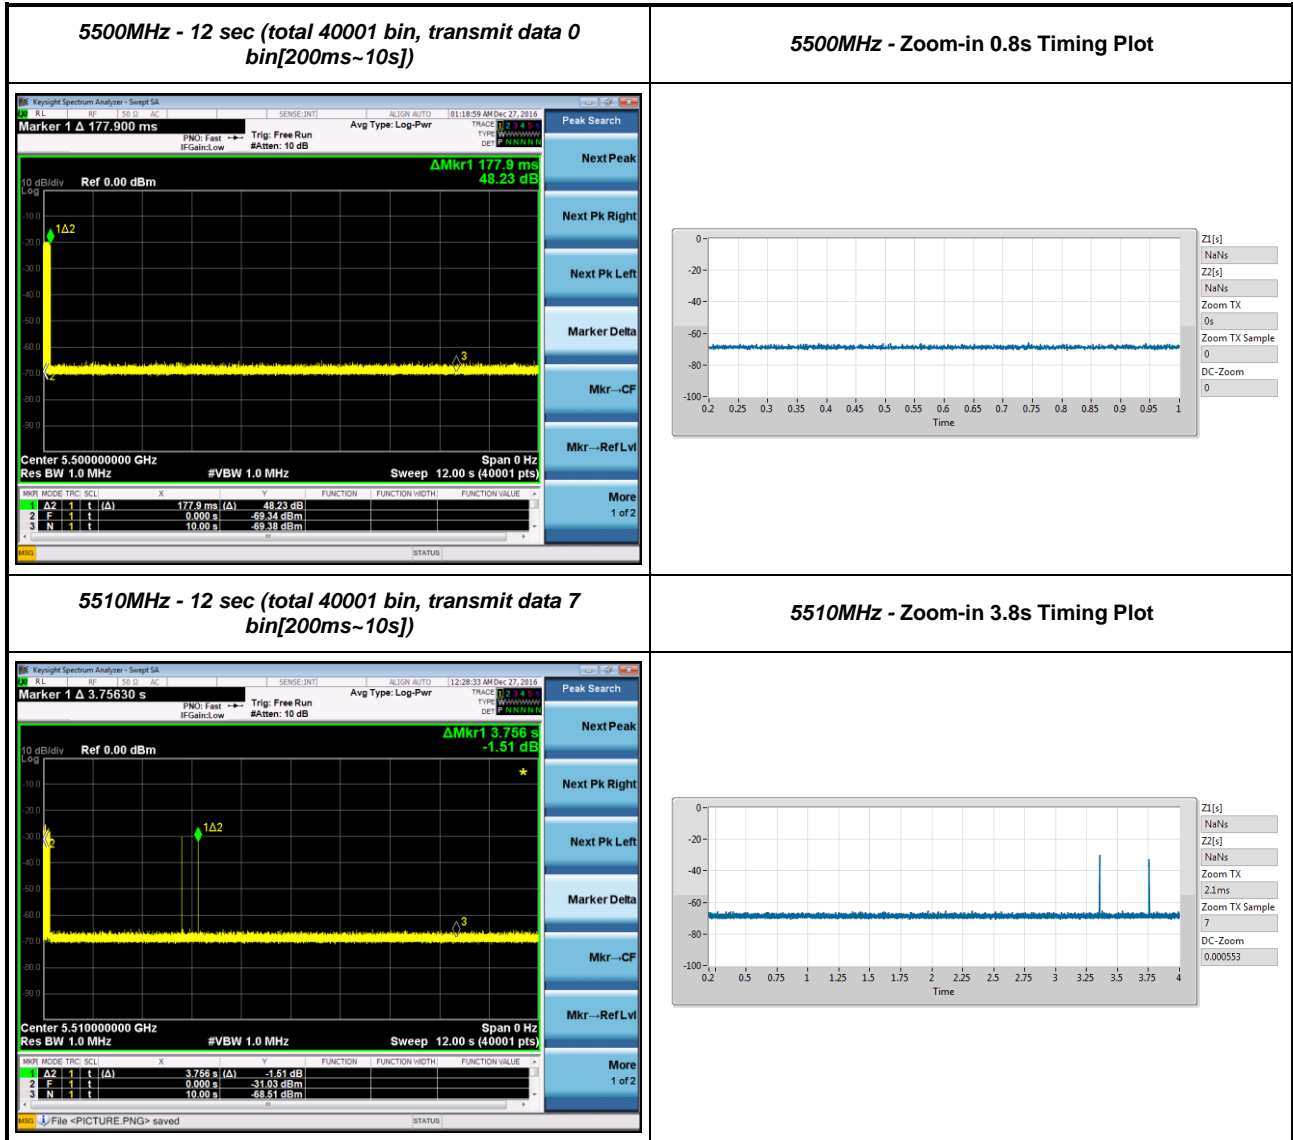

3.3.6 Test result of Non-Occupancy Period

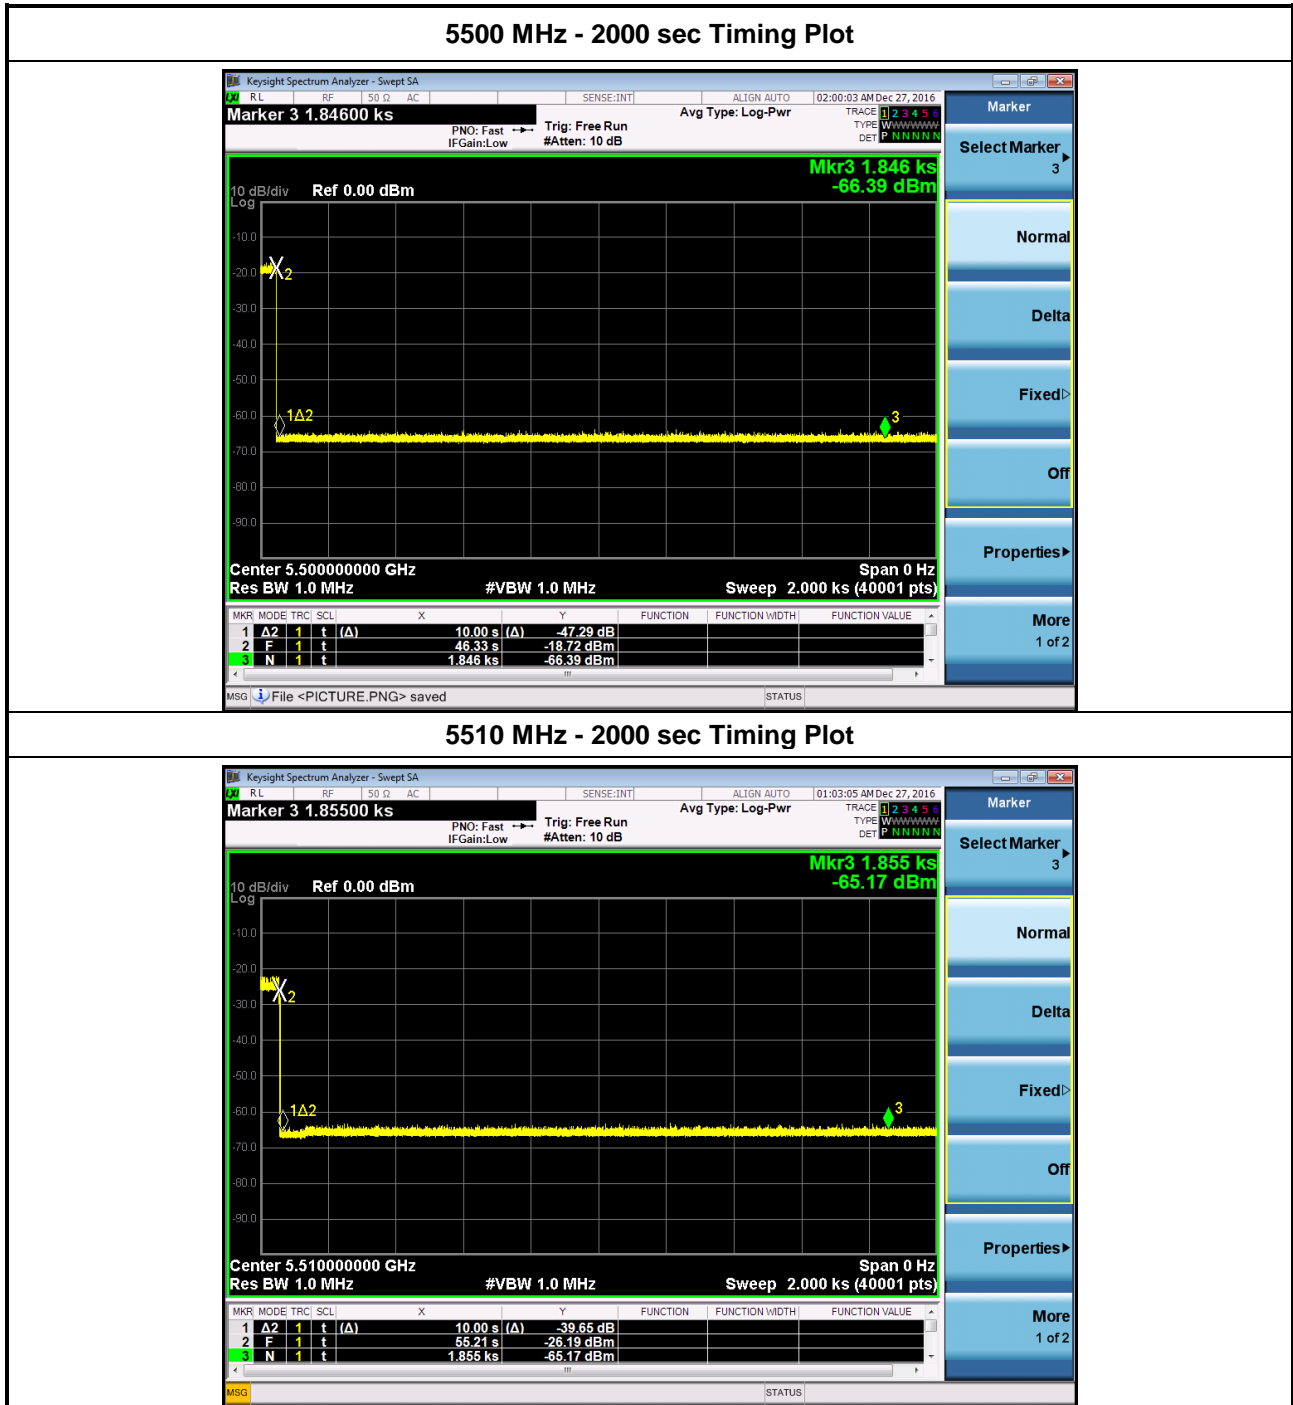



4 Test Equipment and Calibration Data

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due date |
|-------------------------|-----------------|------------------|------------|-----------------|------------------|----------------------|
| Spectrum Analyzer | Keysight | N9010A | MY55150165 | 9kHz~7GHz | 28/Oct/2016 | 27/Oct/2017 |
| Vector Signal Generator | Keysight | N5182B | MY53051912 | 9kHz ~ 6GHz | 21/Nov/2016 | 20/Nov/2017 |
| DC Power Source | G.W. | GPC-6030D | C671845 | DC 0V ~ 60V | 27/Jul/2016 | 27/Jul/2017 |
| RF cable 2m | MTJ Cooperation | 000000-MT18A-200 | D0323 | 1 GHz ~ 40 GHz | 02/Nov/2016 | 01/Nov/2017 |
| RF cable 0.5m | MTJ Cooperation | 000000-MT26A-50 | D5105 | 1 GHz ~ 40 GHz | 02/Nov/2016 | 01/Nov/2017 |
| RF cable 0.2m | MTJ Cooperation | 000000-MT26A-20 | D5101 | 1 GHz ~ 40 GHz | 02/Nov/2016 | 01/Nov/2017 |