

FCC Test Report (PART 27)

Report No.: RFBEOP-WTW-P20100005-2

FCC ID: NKRM18QAG

Test Model: M18QAG

Received Date: Oct. 04, 2020

Test Date: Oct. 12 to 14, 2020

Issued Date: Nov. 12, 2020

Applicant: Wistron NeWeb Corporation

Address: 20 Park Ave. II, Hsinchu Science Park, Hsinchu 308, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	9
3.1 General Description of EUT	9
3.2 Configuration of System under Test	11
3.2.1 Description of Support Units	12
3.3 Test Mode Applicability and Tested Channel Detail	13
3.4 EUT Operating Conditions	17
3.5 General Description of Applied Standards and references	17
4 Test Types and Results	18
4.1 Output Power Measurement	18
4.1.1 Limits of Output Power Measurement	18
4.1.2 Test Procedures	18
4.1.3 Test Setup	18
4.1.4 Test Results	19
4.2 Modulation characteristics Measurement	26
4.2.1 Limits of Modulation characteristics	26
4.2.2 Test Procedure	26
4.2.3 Test Setup	26
4.2.4 Test Results	27
4.3 Frequency Stability Measurement	28
4.3.1 Limits of Frequency Stability Measurement	28
4.3.2 Test Procedure	28
4.3.3 Test Setup	28
4.3.4 Test Results	29
4.4 Emission Bandwidth Measurement	31
4.4.1 Test Procedure	31
4.4.2 Test Setup	31
4.4.3 Test Results (-26dB Bandwidth)	32
4.4.4 Test Results (Occupied Bandwidth)	35
4.5 Channel Edge Measurement	38
4.5.1 Limits of Channel Edge Measurement	38
4.5.2 Test Setup	39
4.5.3 Test Procedures	39
4.5.4 Test Results	40
4.6 Peak to Average Ratio	50
4.6.1 Limits of Peak to Average Ratio Measurement	50
4.6.2 Test Setup	50
4.6.3 Test Procedures	50
4.6.4 Test Results	51
4.7 Conducted Spurious Emissions	54
4.7.1 Limits of Conducted Spurious Emissions Measurement	54
4.7.2 Test Setup	54
4.7.3 Test Procedure	54
4.7.4 Test Results	55
4.8 Radiated Emission Measurement	77
4.8.1 Limits of Radiated Emission Measurement	77
4.8.2 Test Procedure	78
4.8.3 Deviation from Test Standard	78
4.8.4 Test Setup	79

4.8.5 Test Results	80
5 Pictures of Test Arrangements.....	140
Appendix – Information of the Testing Laboratories	141

Release Control Record

Issue No.	Description	Date Issued
RFBEOP-WTW-P20100005-2	Original release.	Nov. 12, 2020

1 Certificate of Conformity

Product: M2M DATA MODULE

Brand: Wistron NeWeb Corporation

Test Model: M18QAG

Sample Status: ENGINEERING SAMPLE

Applicant: Wistron NeWeb Corporation

Test Date: Oct. 12 to 14, 2020

Standards: FCC Part 27, Subpart H / L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Nov. 12, 2020
Claire Kuan / Specialist

Approved by :  , **Date:** Nov. 12, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50	Radiated Power	PASS	Meet the requirement of limit.
2.1047	Modulation characteristics	PASS	Meet the requirement
2.1055 27.54	Frequency Stability Stay with the authorized bands of operation	PASS	Meet the requirement of limit.
2.1049 27.53	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.53	Band Edge Measurements	PASS	Meet the requirement of limit.
27.50	Peak To Average Ratio	PASS	Meet the requirement of limit.
2.1051 27.53	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -48.08dB at 8600MHz & 8662.5MHz.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	1GHz ~ 40GHz	5.3 dB
	40GHz ~ 200GHz	5.4 dB

2.2 Test Site and Instruments

For radiated spurious emissions test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 06, 2020	July 05, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 24, 2020	Sep. 23, 2021
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1500	180504	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 09, 2020	June 08, 2021
RF Cable	EMC104-SM-SM-6000	180602	June 09, 2020	June 08, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: Oct. 14, 2020

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
DC Power Supply Topward	6603D	795558	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 16, 2020	Jan. 15, 2021
True RMS Clamp Meter FLUKE	325	31130711WS	June 06, 2020	June 05, 2021
Mech Switch Absorptive Mini-Circuits	MSP4TA-18+	0140	Feb. 10, 2020	Feb. 09, 2021
FXD ATTEN Mini-Circuits	BW-S3W2+	MN71981	Feb. 10, 2020	Feb. 09, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- Note:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Oct. 12 to 13, 2020

3 General Information

3.1 General Description of EUT

Product	M2M DATA MODULE	
Brand	Wistron NeWeb Corporation	
Test Model	M18QAG	
Status of EUT	ENGINEERING SAMPLE	
Power Supply Rating	DC 3.8V from host equipment	
Modulation Type	QPSK, 16QAM	
Operating Frequency	LTE Band 4	1710.7 ~ 1754.3 MHz
	LTE Band 12	699.7 ~ 715.3 MHz
Max. EIRP Power	LTE Band 4 (Channel Bandwidth 1.4MHz)	24.81dBm
	LTE Band 4 (Channel Bandwidth 3MHz)	24.77dBm
	LTE Band 4 (Channel Bandwidth 5MHz)	24.88dBm
	LTE Band 4 (Channel Bandwidth 10MHz)	25.09dBm
	LTE Band 4 (Channel Bandwidth 15MHz)	25.07dBm
	LTE Band 4 (Channel Bandwidth 20MHz)	25.47dBm
Max. ERP Power	LTE Band 12 (Channel Bandwidth 1.4MHz)	23.18dBm
	LTE Band 12 (Channel Bandwidth 3MHz)	23.26dBm
	LTE Band 12 (Channel Bandwidth 5MHz)	23.25dBm
	LTE Band 12 (Channel Bandwidth 10MHz)	23.41dBm

Emission Designator	LTE Band 4 (Channel Bandwidth 1.4MHz)	QPSK: 1M08G7D 16QAM: 1M08D7W
	LTE Band 4 (Channel Bandwidth 3MHz)	QPSK: 2M69G7D 16QAM: 2M68D7W
	LTE Band 4 (Channel Bandwidth 5MHz)	QPSK: 4M48G7D 16QAM: 4M48D7W
	LTE Band 4 (Channel Bandwidth 10MHz)	QPSK: 8M94G7D 16QAM: 8M94D7W
	LTE Band 4 (Channel Bandwidth 15MHz)	QPSK: 13M4G7D 16QAM: 13M4D7W
	LTE Band 4 (Channel Bandwidth 20MHz)	QPSK: 17M9G7D 16QAM: 17M8D7W
	LTE Band 12 (Channel Bandwidth 1.4MHz)	QPSK: 1M08G7D 16QAM: 1M08D7W
	LTE Band 12 (Channel Bandwidth 3MHz)	QPSK: 2M69G7D 16QAM: 2M68D7W
	LTE Band 12 (Channel Bandwidth 5MHz)	QPSK: 4M49G7D 16QAM: 4M48D7W
	LTE Band 12 (Channel Bandwidth 10MHz)	QPSK: 8M94G7D 16QAM: 8M94D7W
	Antenna Type	Refer to Note
	Antenna Connector	Refer to Note
Accessory Device		NA
Data Cable Supplied		NA

Note:


1. The antennas provided to the EUT, please refer to the following table:

For GPS					
Antenna No.	Band	Freq. Range (MHz)	Antenna Net Gain (dBi)	Antenna Type	Connector Type
1	GPS	1602	2.24	Dipole	SMA
For WWAN					
Antenna No.	Band	Freq. Range (MHz)	Antenna Net Gain (dBi)	Antenna Type	Connector Type
2	LTE / WCDMA (2)	1850~1910	1.56	Dipole	SMA
	LTE / WCDMA (4)	1710~1755	1.62	Dipole	SMA
	LTE / WCDMA (5)	824~849	3.2	Dipole	SMA
	LTE / WCDMA (12)	699~716	1.49	Dipole	SMA
	LTE / WCDMA (14)	788~798	1.66	Dipole	SMA

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Configuration of System under Test

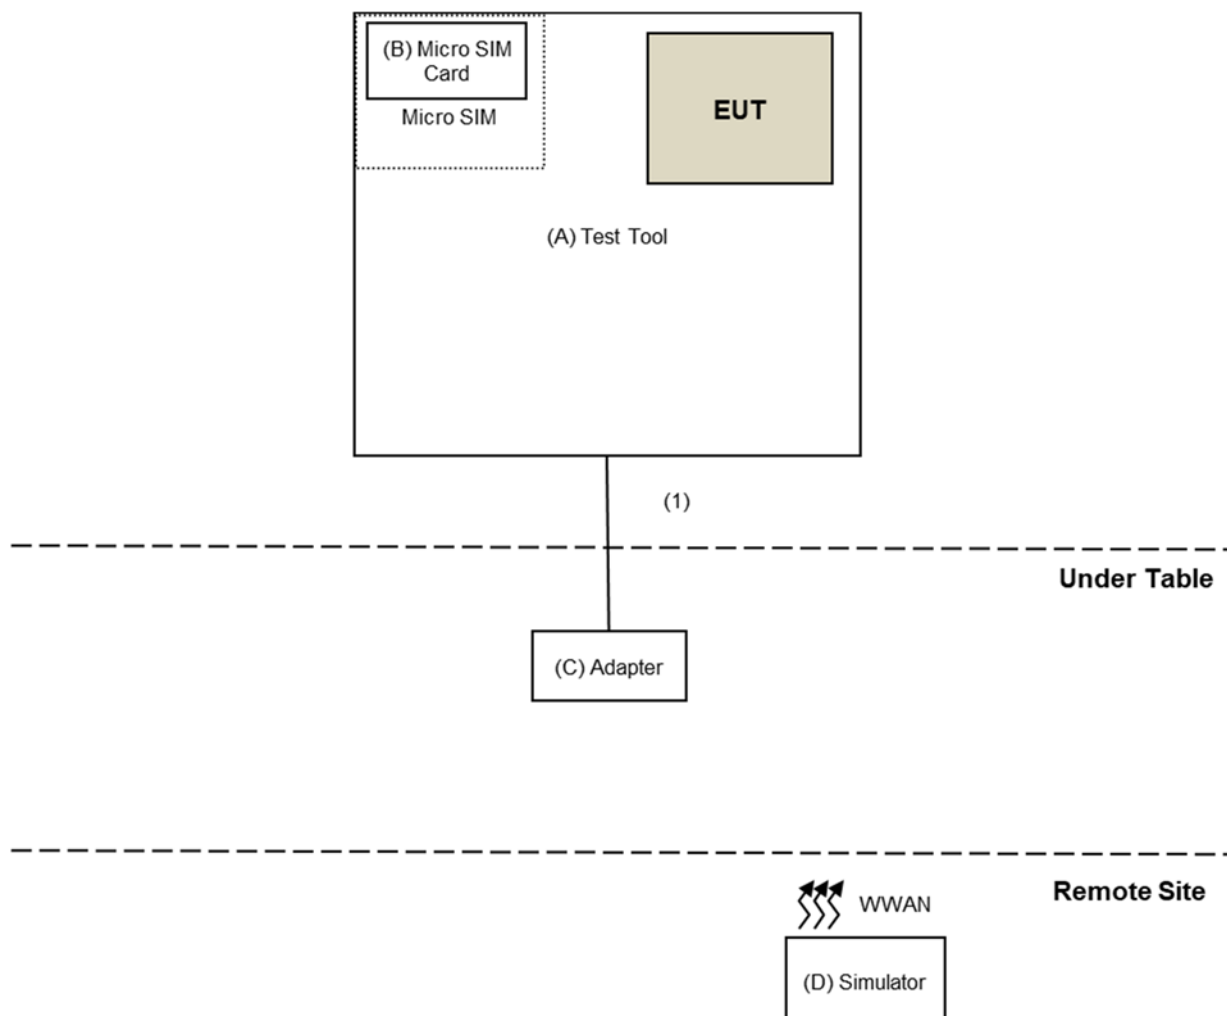

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Test Tool	WNC	NA	NA	NA	Supplied by client
B.	SIM Card	R&S	CRT-Z3	NA	NA	Provided by Lab
C.	Adapter	I.T.E	MU24-Y120200-A1	NA	NA	Supplied by client
D.	Simulator	Anritsu	MT8820C	6201127458	NA	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client

3.3 Test Mode Applicability and Tested Channel Detail

LTE Band 4

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
EIRP	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK/16QAM	1RB / 0 RB offset
	19965 to 20385	19965, 20175, 20385	3MHz	QPSK/16QAM	1RB / 0 RB offset
	19975 to 20375	19975, 20175, 20375	5MHz	QPSK/16QAM	1RB / 0 RB offset
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK/16QAM	1RB / 0 RB offset
	20025 to 20325	20025, 20175, 20325	15MHz	QPSK/16QAM	1RB / 0 RB offset
	20050 to 20300	20050, 20175, 20300	20MHz	QPSK/16QAM	1RB / 0 RB offset
Frequency Stability	19957 to 20393	20175	1.4MHz	QPSK	-
	19965 to 20385	20175	3MHz	QPSK	-
	19975 to 20375	20175	5MHz	QPSK	-
	20000 to 20350	20175	10MHz	QPSK	-
	20025 to 20325	20175	15MHz	QPSK	-
	20050 to 20300	20175	20MHz	QPSK	-
Occupied Bandwidth	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK/16QAM	Full RB
	19965 to 20385	19965, 20175, 20385	3MHz	QPSK/16QAM	Full RB
	19975 to 20375	19975, 20175, 20375	5MHz	QPSK/16QAM	Full RB
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK/16QAM	Full RB
	20025 to 20325	20025, 20175, 20325	15MHz	QPSK/16QAM	Full RB
	20050 to 20300	20050, 20175, 20300	20MHz	QPSK/16QAM	Full RB
Peak to Average Ratio	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK/16QAM	Full RB
	19965 to 20385	19965, 20175, 20385	3MHz	QPSK/16QAM	Full RB
	19975 to 20375	19975, 20175, 20375	5MHz	QPSK/16QAM	Full RB
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK/16QAM	Full RB
	20025 to 20325	20025, 20175, 20325	15MHz	QPSK/16QAM	Full RB
	20050 to 20300	20050, 20175, 20300	20MHz	QPSK/16QAM	Full RB
Band Edge	19957 to 20393	19957	1.4MHz	QPSK	1 RB / 0 RB Offset
		20393			1 RB / 5 RB Offset
		19957, 20393			6 RB / 0 RB Offset
	19965 to 20385	19965	3MHz	QPSK	1 RB / 0 RB Offset
		20385			1 RB / 14 RB Offset
		19965 , 20385			15 RB / 0 RB Offset
	19975 to 20375	19975	5MHz	QPSK	1 RB / 0 RB Offset
		20375			1 RB / 24 RB Offset
		19975, 20375			25 RB / 0 RB Offset
	20000 to 20350	20000	10MHz	QPSK	1 RB / 0 RB Offset
		20350			1 RB / 49 RB Offset
		20000, 20350			50 RB / 0 RB Offset
	20025 to 20325	20025	15MHz	QPSK	1 RB / 0 RB Offset
		20325			1 RB / 74 RB Offset
		20025, 20325			75 RB / 0 RB Offset
	20050 to 20300	20050	20MHz	QPSK	1 RB / 0 RB Offset
		20300			1 RB / 99 RB Offset
		20050, 20300			100 RB / 0 RB Offset

Conducted Emission	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK	1 RB / 0 RB Offset
	19965 to 20385	19965, 20175, 20385	3MHz	QPSK	1 RB / 0 RB Offset
	19975 to 20375	19975, 20175, 20375	5MHz	QPSK	1 RB / 0 RB Offset
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK	1 RB / 0 RB Offset
	20025 to 20325	20025, 20175, 20325	15MHz	QPSK	1 RB / 0 RB Offset
	20050 to 20300	20050, 20175, 20300	20MHz	QPSK	1 RB / 0 RB Offset
Radiated Emission	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK	1 RB / 0 RB Offset
	19965 to 20385	19965, 20175, 20385	3MHz	QPSK	1 RB / 0 RB Offset
	19975 to 20375	19975, 20175, 20375	5MHz	QPSK	1 RB / 0 RB Offset
	20000 to 20350	20000, 20175, 20350	10MHz	QPSK	1 RB / 0 RB Offset
	20025 to 20325	20025, 20175, 20325	15MHz	QPSK	1 RB / 0 RB Offset
	20050 to 20300	20050, 20175, 20300	20MHz	QPSK	1 RB / 0 RB Offset

Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
EIRP	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Frequency Stability	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Occupied Bandwidth	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Band Edge	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Peak to Average Ratio	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Condcudeted Emission	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Radiated Emission Below 1GHz	24deg. C, 75%RH	120Vac, 60Hz	Tom Yang
Radiated Emission Above 1GHz	25deg. C, 75%RH	120Vac, 60Hz	Tom Yang

LTE Band 12

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
ERP	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK/16QAM	1RB / 0 RB offset
	23025 to 23165	23025, 23095, 23165	3MHz	QPSK/16QAM	1RB / 0 RB offset
	23035 to 23155	23035, 23095, 23155	5MHz	QPSK/16QAM	1RB / 0 RB offset
	23060 to 23130	23060, 23095, 23130	10MHz	QPSK/16QAM	1RB / 0 RB offset
Frequency Stability	23017 to 23173	23095	1.4MHz	QPSK	-
	23025 to 23165	23095	3MHz	QPSK	-
	23035 to 23155	23095	5MHz	QPSK	-
	23060 to 23130	23095	10MHz	QPSK	-
Occupied Bandwidth	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK/16QAM	Full RB
	23025 to 23165	23025, 23095, 23165	3MHz	QPSK/16QAM	Full RB
	23035 to 23155	23035, 23095, 23155	5MHz	QPSK/16QAM	Full RB
	23060 to 23130	23060, 23095, 23130	10MHz	QPSK/16QAM	Full RB
Peak to Average Ratio	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK/16QAM	Full RB
	23025 to 23165	23025, 23095, 23165	3MHz	QPSK/16QAM	Full RB
	23035 to 23155	23035, 23095, 23155	5MHz	QPSK/16QAM	Full RB
	23060 to 23130	23060, 23095, 23130	10MHz	QPSK/16QAM	Full RB
Band Edge	23017 to 23173	23017	1.4MHz	QPSK	1 RB / 0 RB Offset
		23173			1 RB / 5 RB Offset
		23017, 23173			6 RB / 0 RB Offset
	23025 to 23165	23025	3MHz	QPSK	1 RB / 0 RB Offset
		23165			1 RB / 14 RB Offset
		23025, 23165			15 RB / 0 RB Offset
	23035 to 23155	23035	5MHz	QPSK	1 RB / 0 RB Offset
		23155			1 RB / 24 RB Offset
		23035, 23155			25 RB / 0 RB Offset
	23060 to 23130	23060	10MHz	QPSK	1 RB / 0 RB Offset
		23130			1 RB / 49 RB Offset
		23060, 23130			50 RB / 0 RB Offset
Conducted Emission	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK	1RB / 0 RB offset
	23025 to 23165	23025, 23095, 23165	3MHz	QPSK	1RB / 0 RB offset
	23035 to 23155	23035, 23095, 23155	5MHz	QPSK	1RB / 0 RB offset
	23060 to 23130	23060, 23095, 23130	10MHz	QPSK	1RB / 0 RB offset
Radiated Emission	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK	1RB / 0 RB offset
	23025 to 23165	23025, 23095, 23165	3MHz	QPSK	1RB / 0 RB offset
	23035 to 23155	23035, 23095, 23155	5MHz	QPSK	1RB / 0 RB offset
	23060 to 23130	23060, 23095, 23130	10MHz	QPSK	1RB / 0 RB offset

NOTE:

All supported modulation types were evaluated. The Worst case of QPSK was selected. Therefore, the Frequency Stability, Band Edge, Condcudeted Emission and Radiated Emission were presented under QPSK mode only.

Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
ERP	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Frequency Stability	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Occupied Bandwidth	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Band Edge	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Peak to Average Ratio	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Conducuted Emission	25deg. C, 62%RH	120Vac, 60Hz	Charlie Yang
Radiated Emission Below 1GHz	24deg. C, 75%RH	120Vac, 60Hz	Tom Yang
Radiated Emission Above 1GHz	25deg. C, 75%RH	120Vac, 60Hz	Tom Yang

3.4 EUT Operating Conditions

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 27, Subpart H / L

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

For Band 4:

For section 27.50(d)(4): Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

For Band 12:

For section 27.50 (c)(10): Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

4.1.2 Test Procedures


Conducted Power Measurement:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and difference RB size/ RB offset for difference bandwidth record the power level shown on power meter.

EIRP / ERP Measurement:

- EIRP = Conducted Output power level + Antenna gain.
- ERP power can be calculated form EIRP power by subtracting the gain of dipole, ERP power = EIPR power - 2.15dBi.
- ERP = Conducted Output power level + Antenna gain (dBi) - Isotropically Factor (2.15dB)

4.1.3 Test Setup

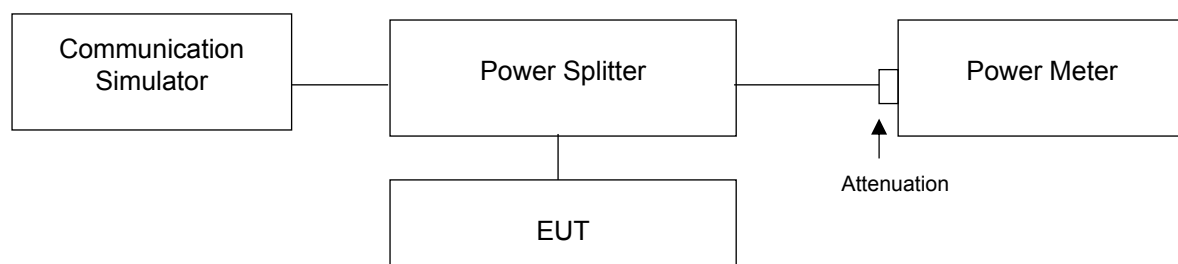

4.1.4 Test Results

CONDUCTED OUTPUT POWER (dBm)

LTE Band 4

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			19957	20175	20393		19957	20175	20393	
			1710.7	1732.5	1754.3		1710.7	1732.5	1754.3	
			MHz	MHz	MHz		MHz	MHz	MHz	
4 / 1.4M	1	0	23.19	22.92	22.84	0	21.93	22.03	21.96	1
	1	2	23.17	22.91	22.85	0	21.98	22.06	22.16	1
	1	5	23.03	22.80	22.98	0	22.18	22.07	22.17	1
	3	0	23.14	22.92	23.09	0	22.21	21.95	21.76	1
	3	1	23.14	22.85	22.96	0	21.94	21.81	22.09	1
	3	3	23.15	22.91	22.88	0	22.14	22.05	22.10	1
	6	0	22.06	21.87	21.86	1	21.12	21.01	20.91	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			19965	20175	20385		19965	20175	20385	
			1711.5	1732.5	1753.5		1711.5	1732.5	1753.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
4 / 3M	1	0	23.15	23.13	23.12	0	22.56	22.47	22.35	1
	1	7	23.13	23.01	23.08	0	22.21	22.04	22.17	1
	1	14	23.00	23.09	22.95	0	22.46	22.19	22.39	1
	8	0	22.16	22.01	21.96	1	21.12	20.84	21.00	2
	8	3	22.15	22.05	22.03	1	21.25	20.85	20.90	2
	8	7	22.02	21.96	21.87	1	21.34	20.89	21.03	2
	15	0	22.00	21.97	22.74	1	21.15	21.55	21.00	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			19975	20175	20375		19975	20175	20375	
			1712.5	1732.5	1752.5		1712.5	1732.5	1752.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
4 / 5M	1	0	23.26	23.02	23.21	0	21.89	22.30	22.19	1
	1	12	23.08	22.91	23.16	0	22.01	22.65	22.22	1
	1	24	22.95	22.05	23.25	0	21.98	22.46	22.10	1
	12	0	22.05	21.91	22.05	1	21.01	21.09	21.21	2
	12	6	21.97	21.99	21.94	1	21.04	21.00	20.98	2
	12	13	21.96	22.08	22.09	1	20.91	21.02	21.02	2
	25	0	21.97	22.01	21.97	1	20.89	21.00	21.00	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			20000	20175	20350		20000	20175	20350	
			1715	1732.5	1750		1715	1732.5	1750	
			MHz	MHz	MHz		MHz	MHz	MHz	
4 / 10M	1	0	23.47	23.37	23.15	0	22.32	22.01	22.12	1
	1	24	23.22	23.04	23.06	0	22.24	21.98	22.09	1
	1	49	23.01	23.22	23.12	0	22.33	21.51	22.08	1
	25	0	22.17	22.18	22.07	1	21.15	21.10	21.18	2
	25	12	22.08	22.06	21.99	1	21.18	20.89	21.17	2
	25	25	22.07	22.06	21.98	1	20.97	20.93	21.01	2
	50	0	22.07	22.05	22.25	1	21.09	21.07	21.09	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			20025	20175	20325		20025	20175	20325	
			1717.5	1732.5	1747.5		1717.5	1732.5	1747.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
4 / 15M	1	0	23.45	23.31	23.18	0	22.20	22.28	21.59	1
	1	37	23.32	23.37	23.16	0	22.15	22.45	22.21	1
	1	74	23.17	23.18	23.21	0	22.09	22.35	22.17	1
	36	0	22.15	22.04	22.00	1	21.03	21.17	21.14	2
	36	19	22.17	22.02	22.04	1	21.16	21.06	21.09	2
	36	39	22.17	21.95	22.06	1	21.23	21.21	21.03	2
	75	0	22.35	22.19	22.23	1	21.43	21.36	21.23	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			20050	20175	20300		20050	20175	20300	
			1720	1732.5	1745		1720	1732.5	1745	
			MHz	MHz	MHz		MHz	MHz	MHz	
4 / 20M	1	0	23.85	23.74	23.28	0	22.41	22.12	22.47	1
	1	50	23.67	23.51	23.57	0	22.57	22.33	22.42	1
	1	99	23.48	23.61	23.58	0	22.48	22.37	22.38	1
	50	0	22.32	22.25	22.24	1	21.23	21.40	21.43	2
	50	25	22.34	22.29	22.13	1	21.42	21.22	21.39	2
	50	50	22.26	22.14	22.20	1	21.35	21.17	21.17	2
	100	0	22.28	22.20	22.24	1	21.36	21.22	21.16	2

LTE Band 12

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			23017	23095	23173		23017	23095	23173	
			699.7	707.5	715.3		699.7	707.5	715.3	
			MHz	MHz	MHz		MHz	MHz	MHz	
12 / 1.4M	1	0	23.84	23.74	23.57	0	22.63	23.00	22.79	1
	1	2	23.80	23.79	23.69	0	22.69	23.03	22.69	1
	1	5	23.56	23.68	23.72	0	22.82	22.95	22.75	1
	3	0	23.69	23.68	23.70	0	22.42	22.84	22.90	1
	3	1	23.84	23.83	23.72	0	22.77	22.79	22.98	1
	3	3	23.83	23.79	23.74	0	22.91	22.84	22.82	1
	6	0	22.81	22.75	22.79	1	21.54	21.37	21.81	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			23025	23095	23165		23025	23095	23165	
			700.5	707.5	714.5		700.5	707.5	714.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
12 / 3M	1	0	23.92	23.79	23.55	0	22.98	22.75	22.61	1
	1	7	23.86	23.87	23.70	0	22.84	22.81	22.68	1
	1	14	23.69	23.82	23.72	0	23.04	22.71	22.71	1
	8	0	22.98	22.78	22.73	1	21.95	21.80	21.73	2
	8	3	22.90	22.83	22.72	1	21.96	21.47	21.71	2
	8	7	22.91	22.82	22.73	1	21.89	21.74	21.91	2
	15	0	22.91	22.77	22.71	1	21.83	21.67	21.73	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			23035	23095	23155		23035	23095	23155	
			701.5	707.5	713.5		701.5	707.5	713.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
12 / 5M	1	0	23.91	23.82	23.64	0	22.74	22.75	22.79	1
	1	12	23.78	23.85	23.51	0	22.73	22.83	22.77	1
	1	24	23.87	23.86	23.66	0	22.63	22.81	22.52	1
	12	0	22.94	22.93	22.72	1	21.66	21.67	21.91	2
	12	6	22.87	22.75	22.73	1	21.64	21.78	21.68	2
	12	13	22.77	22.82	22.64	1	21.68	21.81	21.60	2
	25	0	22.79	22.81	22.75	1	21.80	21.76	21.84	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			23060	23095	23130		23060	23095	23130	
			704	707.5	711		704	707.5	711	
			MHz	MHz	MHz		MHz	MHz	MHz	
12 / 10M	1	0	24.07	23.69	23.88	0	22.85	22.61	22.96	1
	1	24	23.98	23.97	24.02	0	22.94	22.88	23.95	1
	1	49	23.57	23.76	23.95	0	22.77	22.75	22.79	1
	25	0	22.68	22.87	22.94	1	21.79	21.95	22.00	2
	25	12	22.86	22.76	22.79	1	21.80	21.91	21.87	2
	25	25	22.88	22.77	22.74	1	21.79	21.77	21.67	2
	50	0	22.82	22.76	22.87	1	21.85	21.81	21.89	2

EIRP / ERP POWER

LTE Band 4

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			19957	20175	20393		19957	20175	20393	
			1710.7	1732.5	1754.3		1710.7	1732.5	1754.3	
4 / 1.4M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
			23.19	22.92	22.84		21.93	22.03	21.96	
Gain (dBi)			1.62	1.62	1.62		1.62	1.62	1.62	
Max EIRP Power (dBm)			24.81	24.54	24.46		23.55	23.65	23.58	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			19965	20175	20385		19965	20175	20385	
			1711.5	1732.5	1753.5		1711.5	1732.5	1753.5	
4 / 3M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
			23.15	23.13	23.12		22.56	22.47	22.35	
Gain (dBi)			1.62	1.62	1.62		1.62	1.62	1.62	
Max EIRP Power (dBm)			24.77	24.75	24.74		24.18	24.09	23.97	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			19975	20175	20375		19975	20175	20375	
			1712.5	1732.5	1752.5		1712.5	1732.5	1752.5	
4 / 5M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
			23.26	23.02	23.21		21.89	22.30	22.19	
Gain (dBi)			1.62	1.62	1.62		1.62	1.62	1.62	
Max EIRP Power (dBm)			24.88	24.64	24.83		23.51	23.92	23.81	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			20000	20175	20350		20000	20175	20350	
			1715	1732.5	1750		1715	1732.5	1750	
4 / 10M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
			23.47	23.37	23.15		22.32	22.01	22.12	
Gain (dBi)			1.62	1.62	1.62		1.62	1.62	1.62	
Max EIRP Power (dBm)			25.09	24.99	24.77		23.94	23.63	23.74	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			20025	20175	20325		20025	20175	20325	
			1717.5	1732.5	1747.5		1717.5	1732.5	1747.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
4 / 15M	1	0	23.45	23.31	23.18	0	22.20	22.28	21.59	1
Gain (dBi)			1.62	1.62	1.62		1.62	1.62	1.62	
Max EIRP Power (dBm)			25.07	24.93	24.80		23.82	23.90	23.21	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			20050	20175	20300		20050	20175	20300	
			1720	1732.5	1745		1720	1732.5	1745	
			MHz	MHz	MHz		MHz	MHz	MHz	
4 / 20M	1	0	23.85	23.74	23.28	0	22.41	22.12	22.47	1
Gain (dBi)			1.62	1.62	1.62		1.62	1.62	1.62	
Max EIRP Power (dBm)			25.47	25.36	24.90		24.03	23.74	24.09	

LTE Band 12

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			23017	23095	23173		23017	23095	23173	
			699.7	707.5	715.3		699.7	707.5	715.3	
12 / 1.4M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
Gain (dBi)			23.84	23.74	23.57		22.63	23.00	22.79	
Isotropically Factor (dBc)			1.49	1.49	1.49		1.49	1.49	1.49	
Max ERP Power (dBm)			2.15	2.15	2.15		2.15	2.15	2.15	
			23.18	23.08	22.91		21.97	22.34	22.13	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			23025	23095	23165		23025	23095	23165	
			700.5	707.5	714.5		700.5	707.5	714.5	
12 / 3M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
Gain (dBi)			23.92	23.79	23.55		22.98	22.75	22.61	
Isotropically Factor (dBc)			1.49	1.49	1.49		1.49	1.49	1.49	
Max ERP Power (dBm)			2.15	2.15	2.15		2.15	2.15	2.15	
			23.26	23.13	22.89		22.32	22.09	21.95	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			23035	23095	23155		23035	23095	23155	
			701.5	707.5	713.5		701.5	707.5	713.5	
12 / 5M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
Gain (dBi)			23.91	23.82	23.64		22.74	22.75	22.79	
Isotropically Factor (dBc)			1.49	1.49	1.49		1.49	1.49	1.49	
Max ERP Power (dBm)			2.15	2.15	2.15		2.15	2.15	2.15	
			23.25	23.16	22.98		22.08	22.09	22.13	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			23060	23095	23130		23060	23095	23130	
			704	707.5	711		704	707.5	711	
12 / 10M	1	0	MHz	MHz	MHz	0	MHz	MHz	MHz	1
Gain (dBi)			24.07	23.69	23.88		22.85	22.61	22.96	
Isotropically Factor (dBc)			1.49	1.49	1.49		1.49	1.49	1.49	
Max ERP Power (dBm)			2.15	2.15	2.15		2.15	2.15	2.15	
			23.41	23.03	23.22		22.19	21.95	22.30	

4.2 Modulation characteristics Measurement

4.2.1 Limits of Modulation characteristics

N/A

4.2.2 Test Procedure


Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.3 Test Setup




4.2.4 Test Results

LTE Band 4

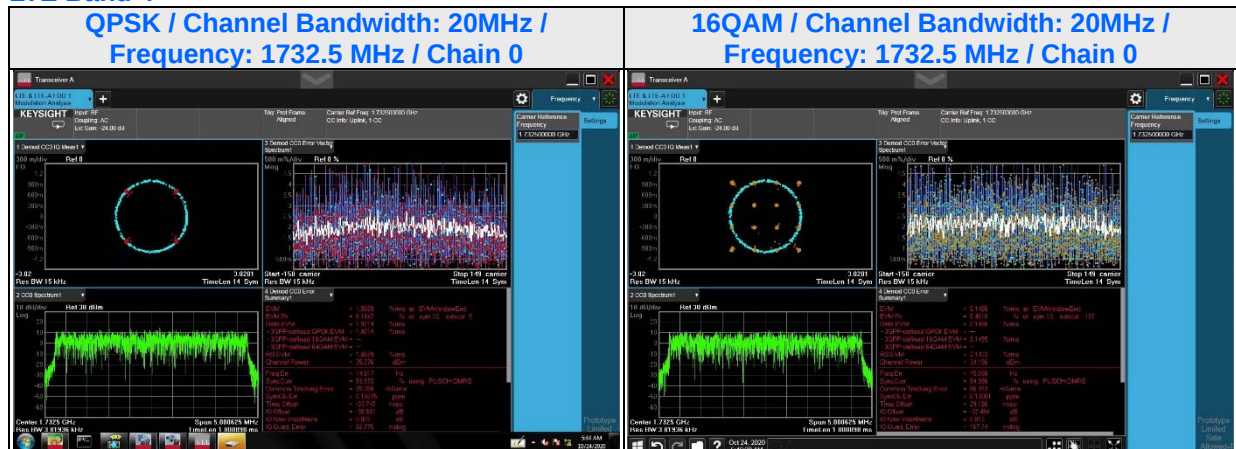

LTE Band 12

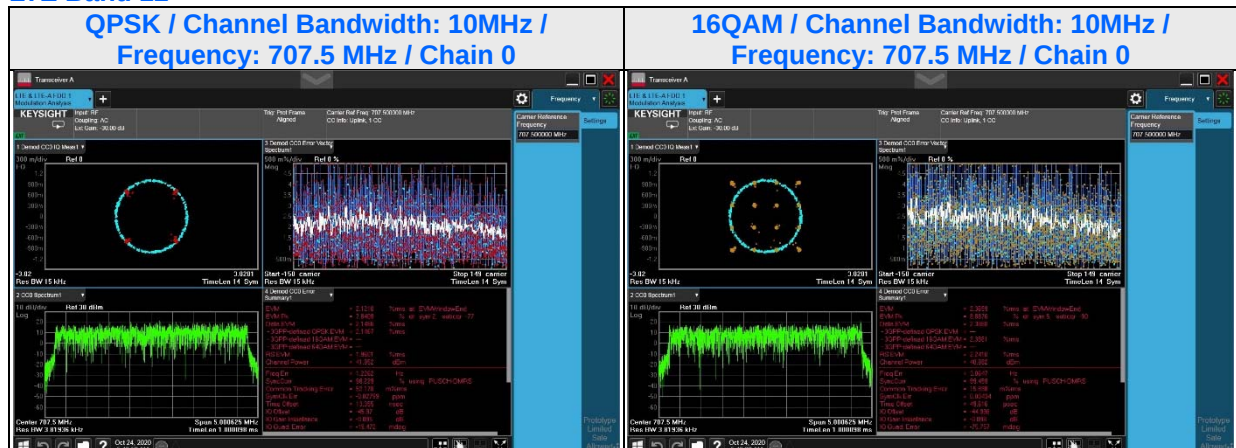

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

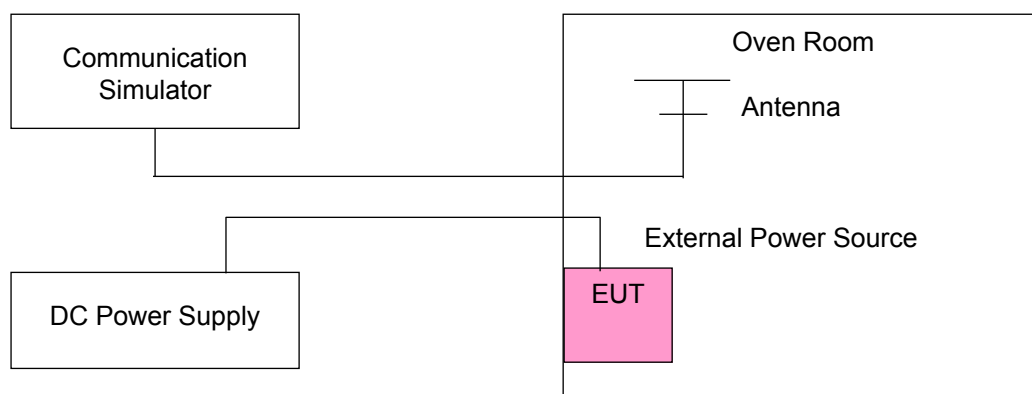

4.3.4 Test Results

LTE Band 4

Voltage (Volts)	Frequency Error (MHz)						Limit (MHz)	
	1.4MHz		3MHz		5MHz			
	Low	High	Low	High	Low	High	Low Edge	High Edge
3.3	1710.160009	1754.839993	1710.159996	1754.839997	1710.259993	1754.750009	1710	1755
4.2	1710.159997	1754.839999	1710.160001	1754.840005	1710.260008	1754.750009	1710	1755
ppm	0.171		-0.947		0.049		-	-
Voltage (Volts)	Frequency Error (MHz)						Limit (MHz)	
	10MHz		15MHz		20MHz			
	Low	High	Low	High	Low	High	Low Edge	High Edge
3.3	1710.539996	1754.479999	1710.809991	1754.220005	1711.119990	1753.960006	1710	1755
4.2	1710.540009	1754.480008	1710.809995	1754.219997	1711.119996	1753.959998	1710	1755
ppm	0.660		1.474		-1.282		-	-

NOTE: The applicant defined the normal working voltage of the battery is from 3.3Vdc to 4.2Vdc

Temp. (°C)	Frequency Error (MHz)						Limit (MHz)	
	1.4MHz		3MHz		5MHz			
	Low	High	Low	High	Low	High	Low Edge	High Edge
60	1710.159990	1754.840004	1710.160004	1754.839997	1710.259993	1754.750007	1710	1755
50	1710.160009	1754.840009	1710.159991	1754.840005	1710.260002	1754.749991	1710	1755
40	1710.160002	1754.839991	1710.160005	1754.840009	1710.260002	1754.749999	1710	1755
30	1710.159992	1754.840003	1710.160002	1754.840001	1710.259997	1754.750009	1710	1755
20	1710.160009	1754.839995	1710.159991	1754.839990	1710.259992	1754.749992	1710	1755
10	1710.160003	1754.839990	1710.160001	1754.839993	1710.260005	1754.750006	1710	1755
0	1710.160009	1754.839990	1710.159994	1754.839998	1710.260006	1754.750009	1710	1755
-10	1710.159992	1754.840000	1710.160006	1754.840009	1710.260009	1754.750004	1710	1755
-20	1710.160008	1754.840008	1710.159993	1754.839990	1710.259997	1754.750000	1710	1755
-30	1710.159991	1754.839996	1710.160001	1754.839998	1710.259991	1754.750007	1710	1755
ppm	-0.727		0.394		-1.007		-	-
Temp. (°C)	Frequency Error (MHz)						Limit (MHz)	
	10MHz		15MHz		20MHz			
	Low	High	Low	High	Low	High	Low Edge	High Edge
60	1710.540004	1754.479996	1710.810006	1754.220005	1711.119994	1753.959994	1710	1755
50	1710.539994	1754.479998	1710.810006	1754.220008	1711.119992	1753.960006	1710	1755
40	1710.539993	1754.480005	1710.810005	1754.220005	1711.119996	1753.959998	1710	1755
30	1710.539996	1754.480000	1710.810005	1754.220008	1711.120006	1753.959995	1710	1755
20	1710.540001	1754.479993	1710.810001	1754.219990	1711.119991	1753.959991	1710	1755
10	1710.540006	1754.479996	1710.809997	1754.219990	1711.120001	1753.959998	1710	1755
0	1710.539995	1754.480006	1710.809999	1754.220001	1711.119995	1753.959998	1710	1755
-10	1710.540004	1754.480002	1710.810008	1754.220002	1711.120009	1753.960004	1710	1755
-20	1710.539997	1754.479996	1710.809991	1754.220002	1711.120008	1753.959992	1710	1755
-30	1710.540003	1754.479994	1710.810000	1754.219995	1711.119990	1753.960001	1710	1755
ppm	-0.348		-0.178		-1.263		-	-

LTE Band 12

Voltage (Volts)	Frequency Error (MHz)								Limit (MHz)	
	1.4MHz		3MHz		5MHz		10MHz		Low Edge	High Edge
	Low	High	Low	High	Low	High	Low	High		
3.3	699.159996	715.840005	699.159995	715.839995	699.269996	715.739992	699.539995	715.460003	699	716
4.2	699.160004	715.839996	699.159992	715.840007	699.269991	715.739993	699.540005	715.460009	699	716
ppm	-1.307		1.215		-0.318		0.266		-	-

NOTE: The applicant defined the normal working voltage of the battery is from 3.3Vdc to 4.2Vdc

Temp. (°C)	Frequency Error (MHz)								Limit (MHz)	
	1.4MHz		3MHz		5MHz		10MHz		Low Edge	High Edge
	Low	High	Low	High	Low	High	Low	High		
60	699.159990	715.839992	699.159993	715.840005	699.269999	715.740004	699.540008	715.460009	699	716
50	699.159990	715.840000	699.160003	715.839990	699.269992	715.739991	699.540009	715.459993	699	716
40	699.159997	715.840004	699.159999	715.840000	699.270005	715.739999	699.540005	715.460004	699	716
30	699.159990	715.840007	699.159997	715.839992	699.270003	715.740000	699.539992	715.460007	699	716
20	699.160006	715.839998	699.160007	715.839997	699.270006	715.740002	699.539997	715.459990	699	716
10	699.160009	715.840005	699.159996	715.839995	699.269993	715.740004	699.539999	715.460009	699	716
0	699.159998	715.839990	699.159998	715.840007	699.270005	715.740002	699.540008	715.460000	699	716
-10	699.159997	715.840002	699.160008	715.839997	699.270003	715.740000	699.540008	715.460008	699	716
-20	699.159995	715.840007	699.159992	715.839999	699.270000	715.740004	699.539993	715.459990	699	716
-30	699.160003	715.839994	699.160005	715.840001	699.270000	715.739996	699.540005	715.459999	699	716
ppm	0.451		0.689		0.718		-0.022		-	-

4.4 Emission Bandwidth Measurement

4.4.1 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with $RBW \geq 1\% \times OBW$ and $VBW \geq 3 \times RBW$.


Occupied Bandwidth Measurement:

Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

26 dB Bandwidth Measurement:

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26dB below the transmitter power.

4.4.2 Test Setup

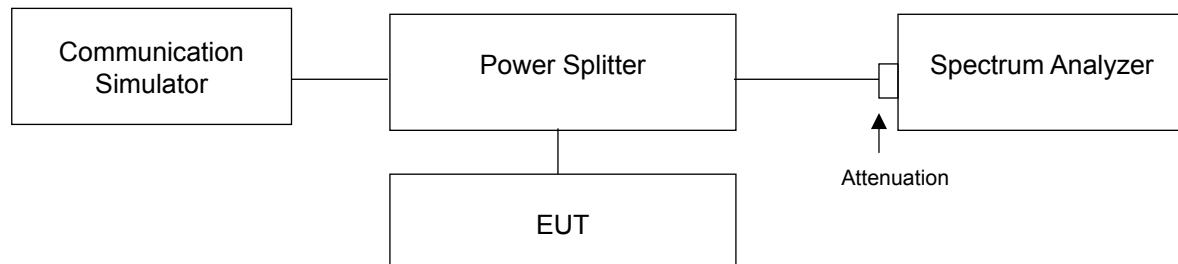


4.4.3 Test Results (-26dB Bandwidth)


LTE Band 4							
Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	1.26	1.24	19965	1711.5	2.94	2.93
20175	1732.5	1.24	1.24	20175	1732.5	2.94	2.91
20393	1754.3	1.24	1.26	20385	1753.5	2.94	2.94
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.92	4.86	20000	1715	9.65	9.71
20175	1732.5	4.91	4.91	20175	1732.5	9.67	9.71
20375	1752.5	4.87	4.90	20350	1750	9.72	9.71
Channel Bandwidth 15MHz				Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	14.40	14.44	20050	1720	19.14	19.02
20175	1732.5	14.40	14.44	20175	1732.5	19.06	19.04
20325	1747.5	14.30	14.26	20300	1745	19.09	19.06

Spectrum Plot of Worst Value


1.4MHz / QPSK

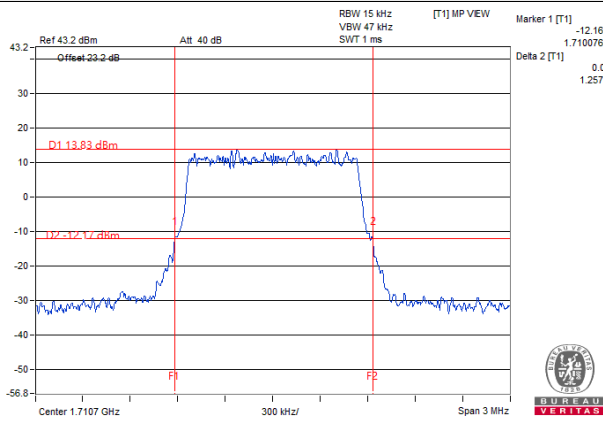


3MHz / QPSK

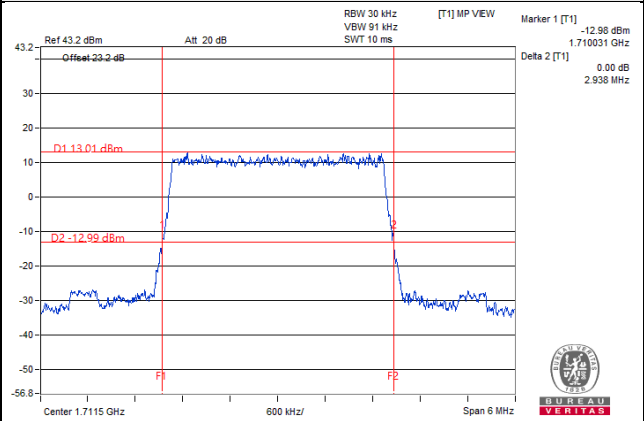


5MHz / QPSK

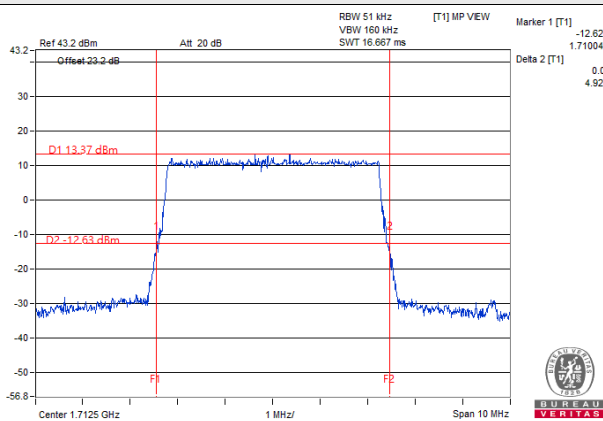


10MHz / QPSK

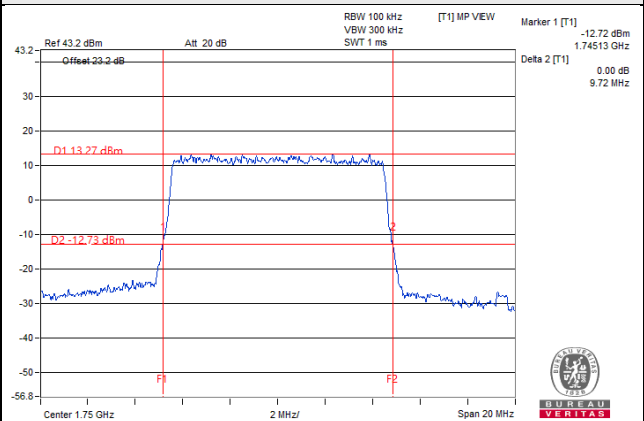

15MHz / 16QAM

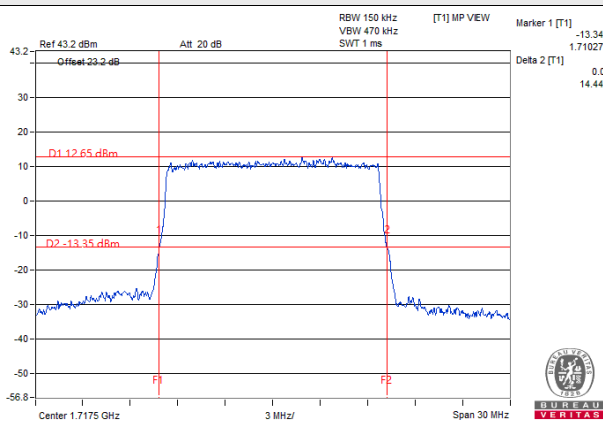

20MHz / QPSK

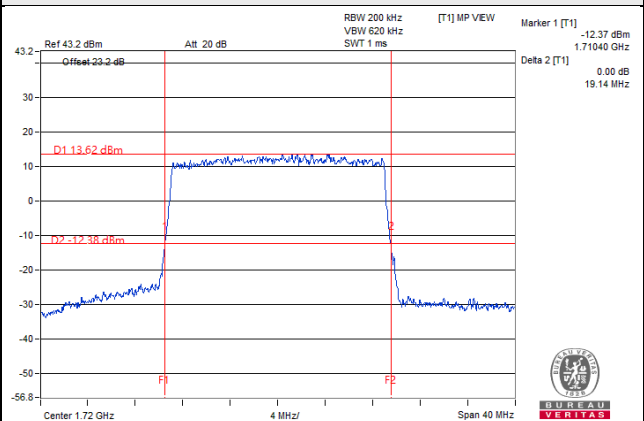


LTE Band 12


Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	1.24	1.25	23025	700.5	2.96	2.92
23095	707.5	1.25	1.24	23095	707.5	2.96	2.93
23173	715.3	1.25	1.24	23165	714.5	2.94	2.93
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	4.90	4.87	23060	704	9.72	9.78
23095	707.5	4.89	4.89	23095	707.5	9.67	9.71
23155	713.5	4.91	4.88	23130	711	9.53	9.69

Spectrum Plot of Worst Value


1.4MHz / QPSK

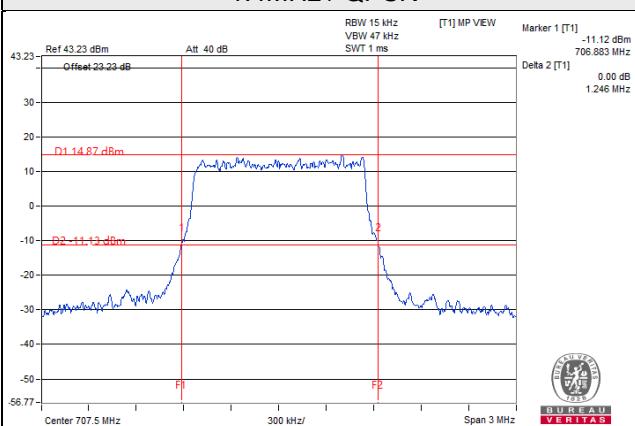


3MHz / QPSK

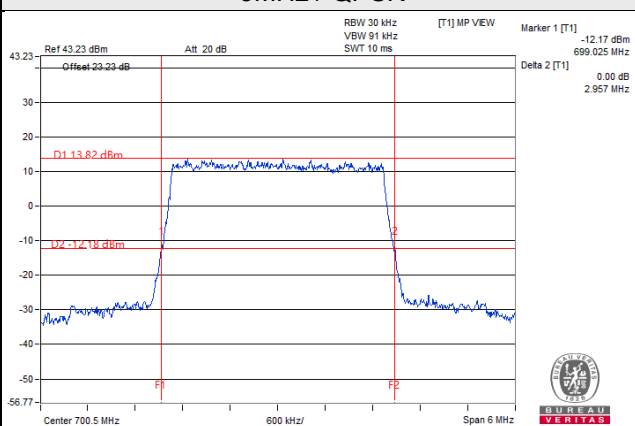

5MHz / QPSK

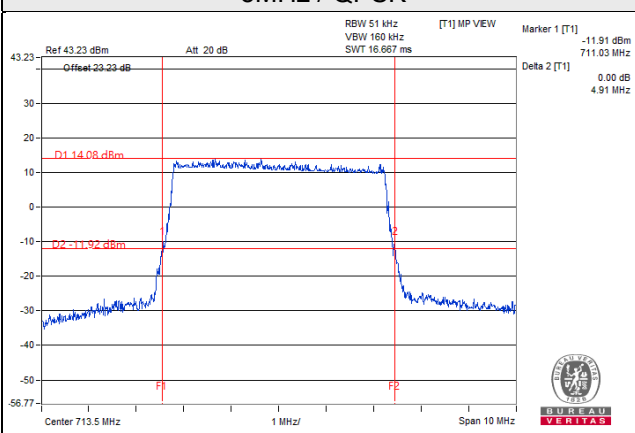

10MHz / 16QAM

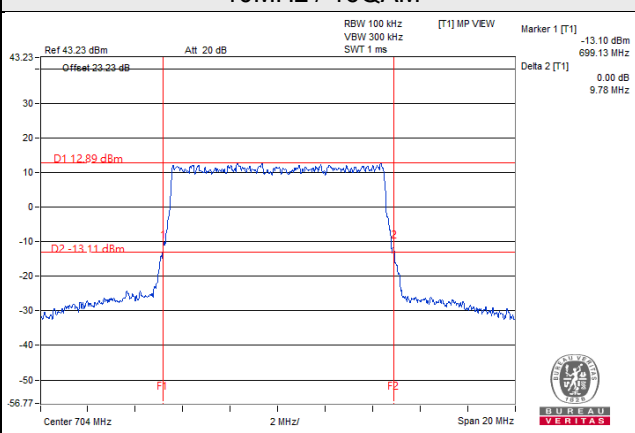


4.4.4 Test Results (Occupied Bandwidth)


LTE Band 4							
Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	1.08	1.08	19965	1711.5	2.69	2.68
20175	1732.5	1.08	1.08	20175	1732.5	2.68	2.68
20393	1754.3	1.08	1.08	20385	1753.5	2.69	2.68
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.46	4.46	20000	1715	8.94	8.92
20175	1732.5	4.47	4.48	20175	1732.5	8.94	8.94
20375	1752.5	4.48	4.46	20350	1750	8.92	8.92
Channel Bandwidth 15MHz				Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	13.38	13.41	20050	1720	17.88	17.76
20175	1732.5	13.41	13.38	20175	1732.5	17.84	17.76
20325	1747.5	13.38	13.41	20300	1745	17.88	17.80

Spectrum Plot of Worst Value


1.4MHz / QPSK

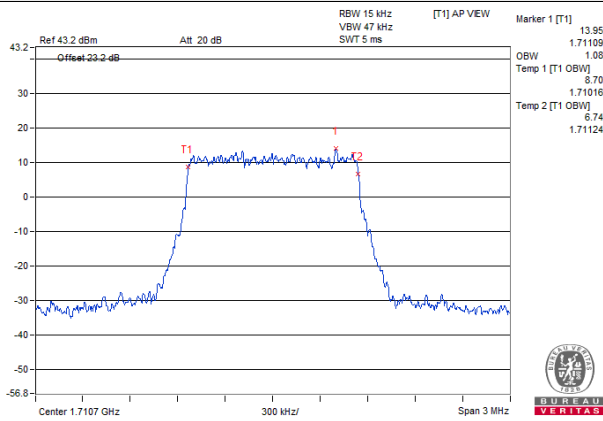


3MHz / QPSK

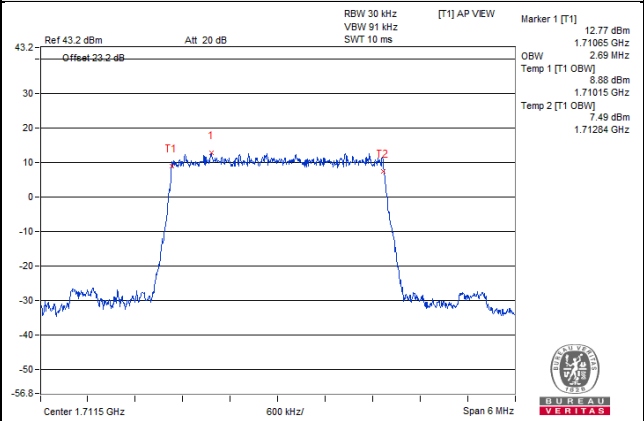


5MHz / QPSK

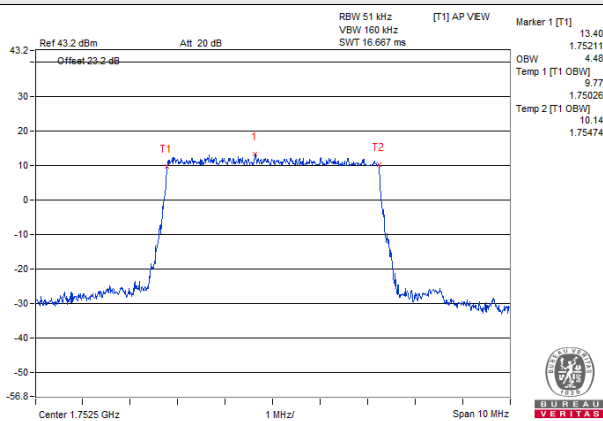


10MHz / QPSK

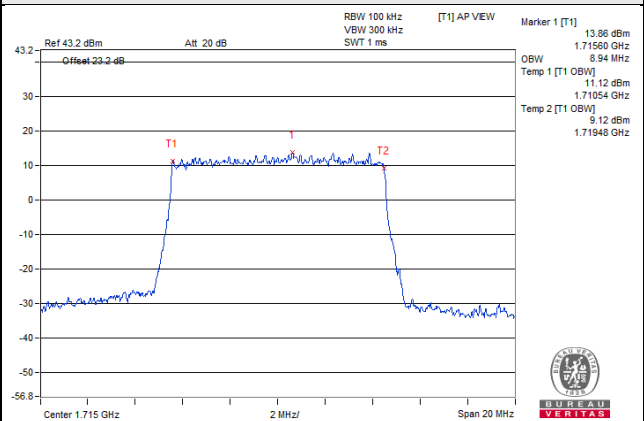

15MHz / QPSK

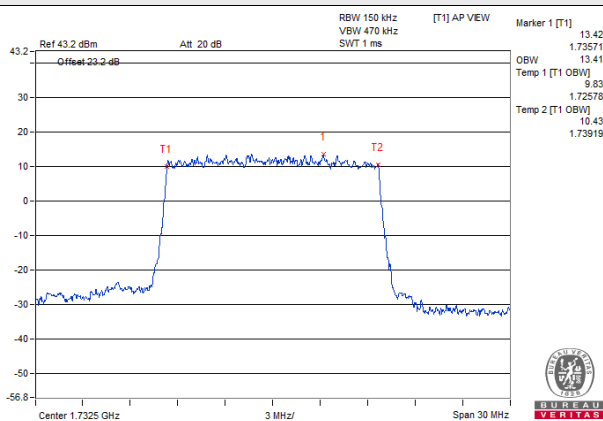


20MHz / QPSK

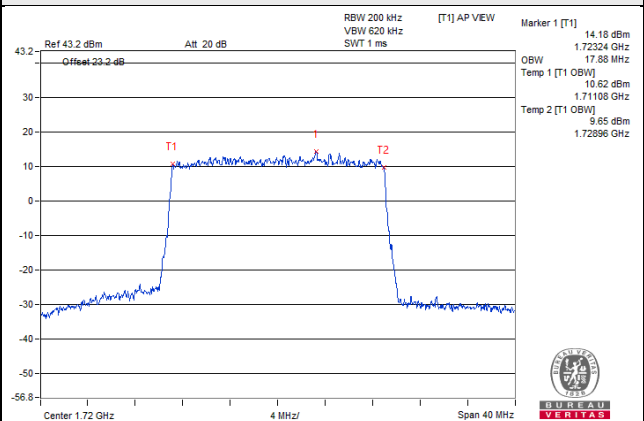

LTE Band 12

Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	1.08	1.08	23025	700.5	2.68	2.67
23095	707.5	1.08	1.08	23095	707.5	2.68	2.68
23173	715.3	1.08	1.08	23165	714.5	2.69	2.68
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	4.47	4.47	23060	704	8.94	8.94
23095	707.5	4.49	4.48	23095	707.5	8.94	8.94
23155	713.5	4.48	4.47	23130	711	8.92	8.92

Spectrum Plot of Worst Value

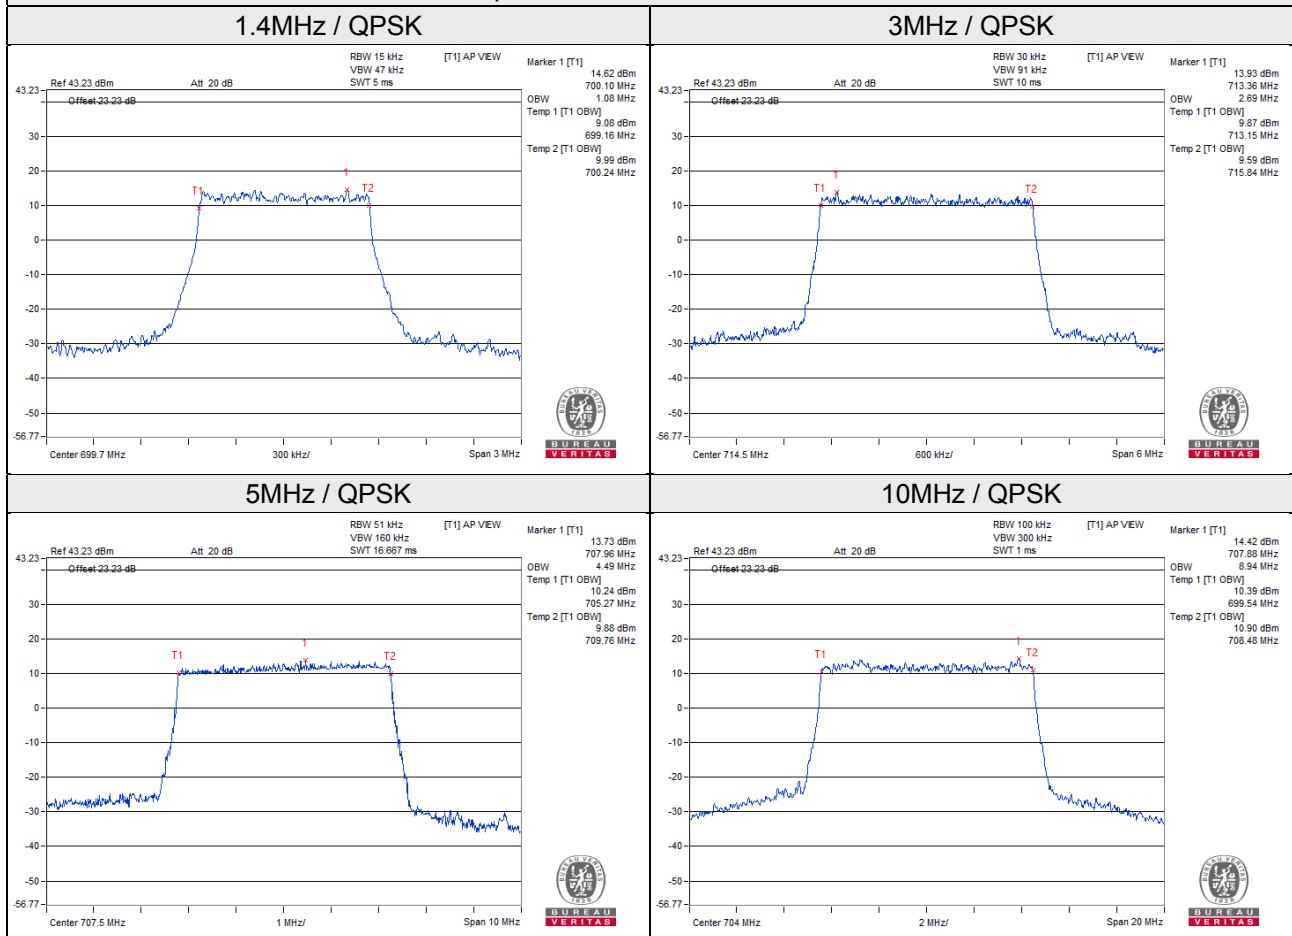

4.5 Channel Edge Measurement

4.5.1 Limits of Channel Edge Measurement


For Subpart L : LTE Band 4

According to FCC 27.53(h) AWS emission limits— General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

For Subpart H : LTE Band 12

According to FCC 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.


4.5.2 Test Setup

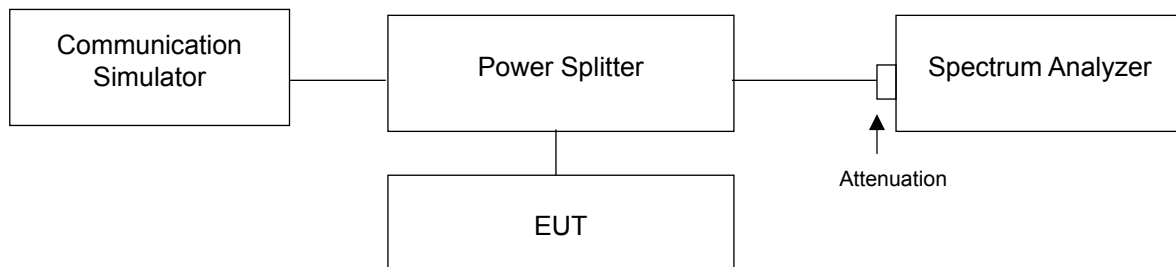

4.5.3 Test Procedures

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and s RB of the spectrum is $>1\%$ emission bandwidth and VB of the spectrum is $\geq 3*RB$.
- c. Record the max trace plot into the test report.


4.5.4 Test Results

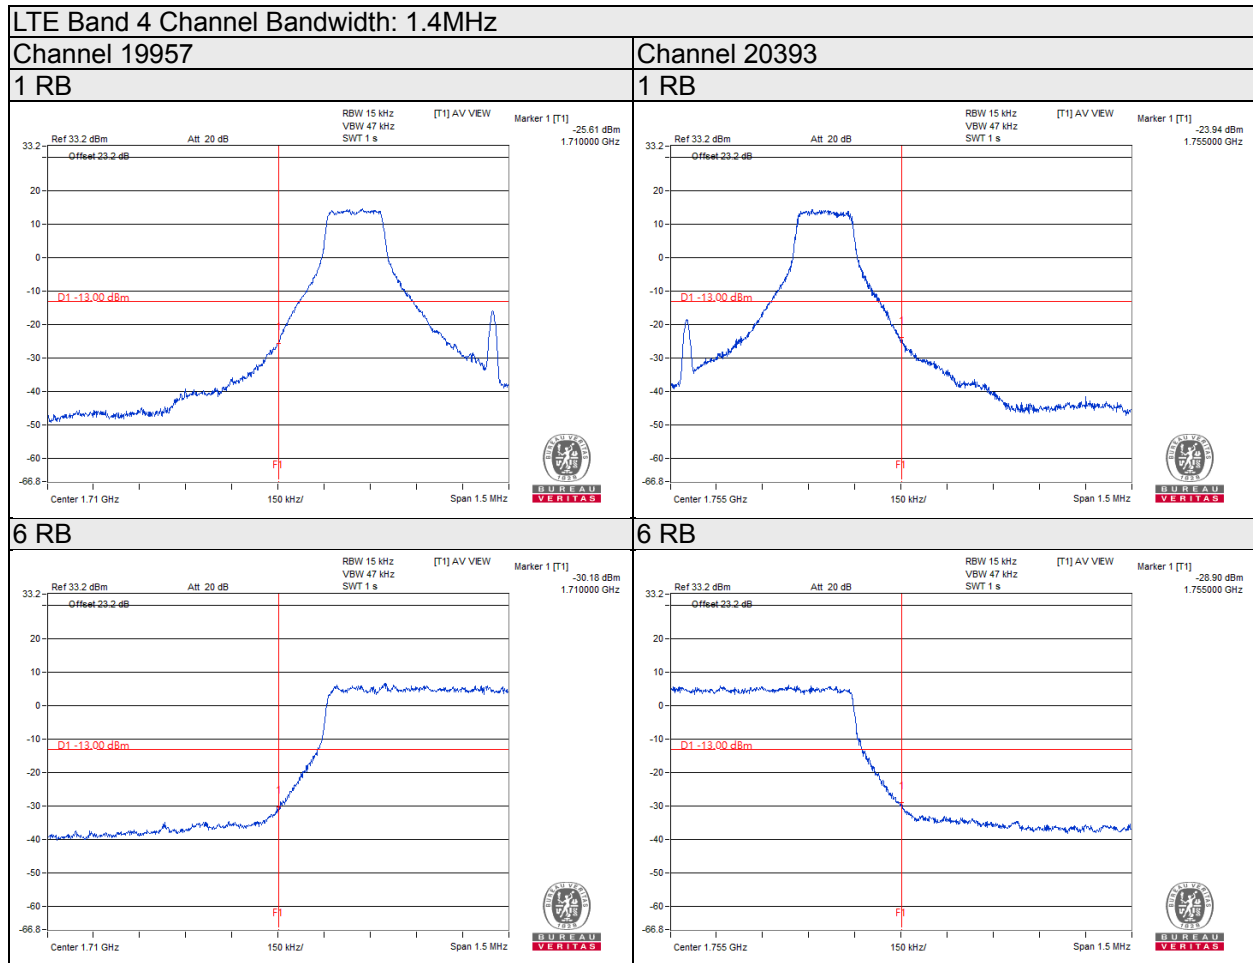

LTE Band 4 Channel Bandwidth: 3MHz


Channel 19965

1 RB

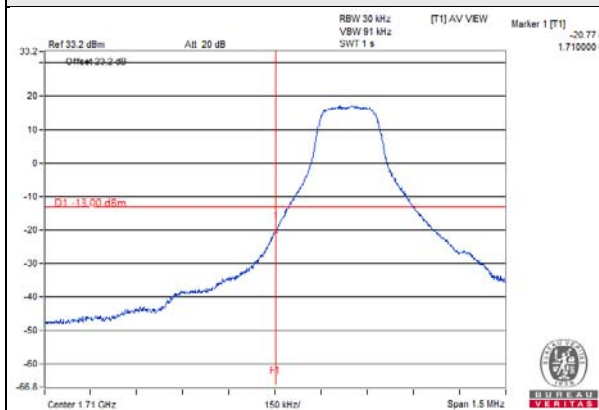


Channel 20385


1 RB

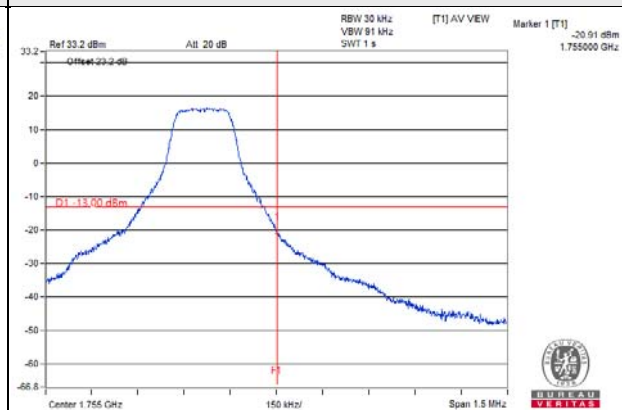

15 RB

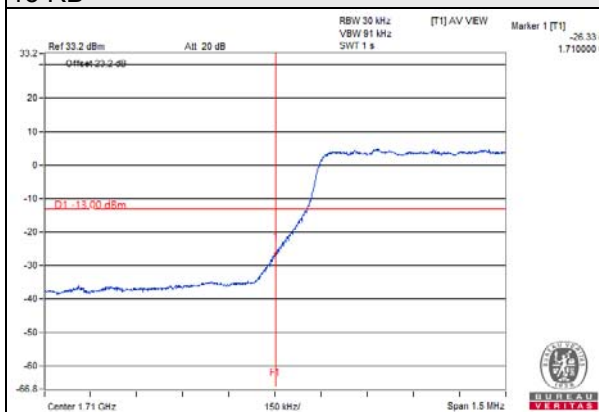


15 RB

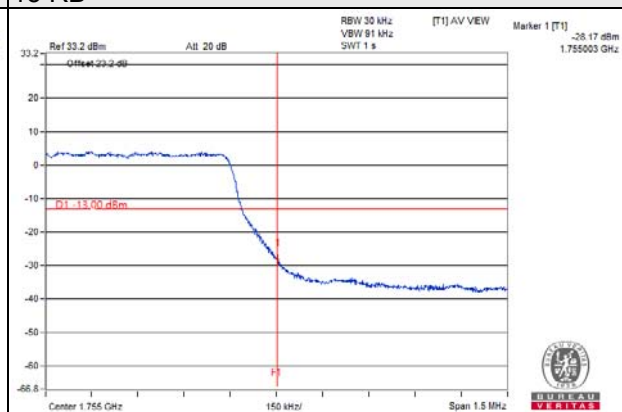

LTE Band 4 Channel Bandwidth: 5MHz


Channel 19975

1 RB

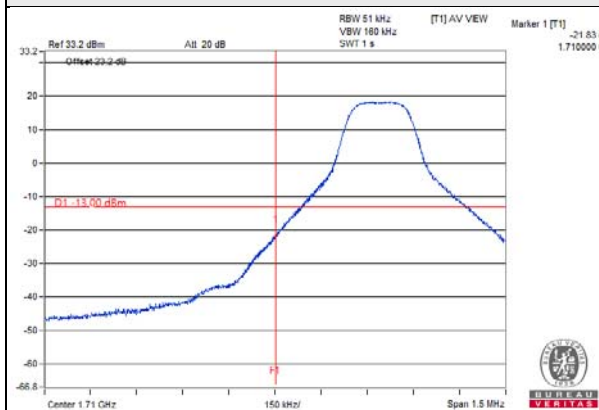


Channel 20375


1 RB

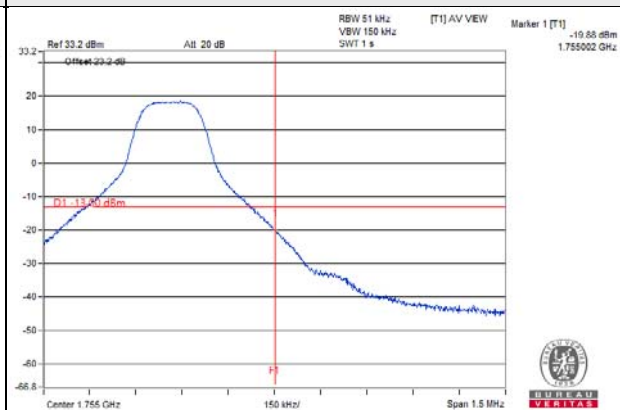

25 RB

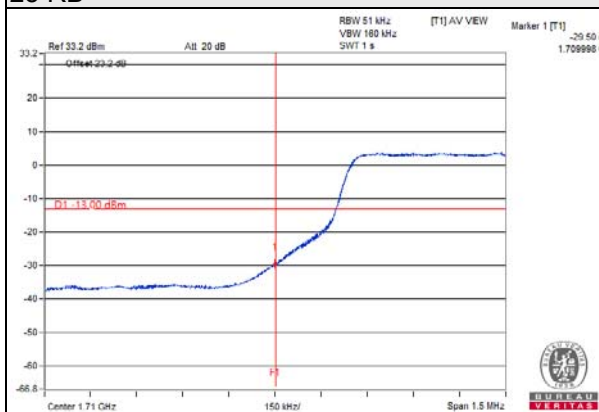


25 RB

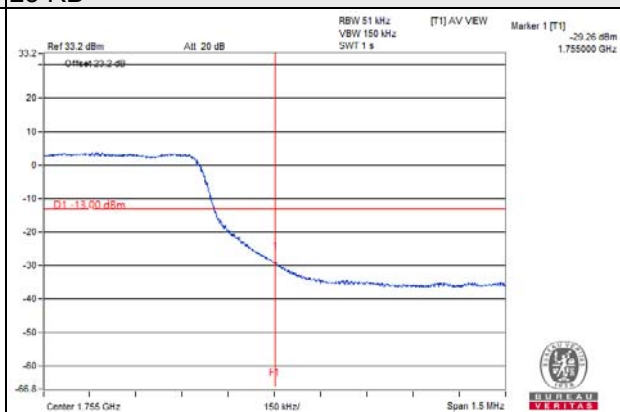

LTE Band 4 Channel Bandwidth: 10MHz


Channel 20000

1 RB

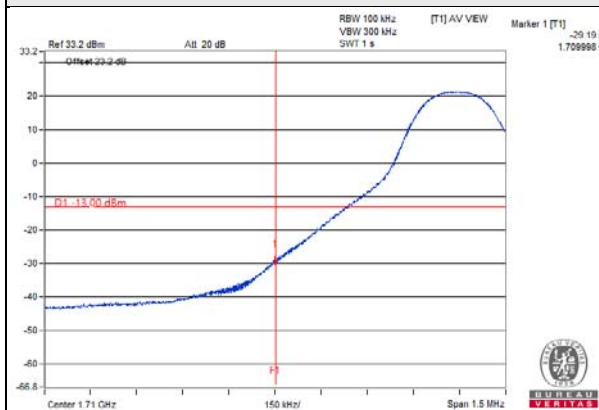


Channel 20350


1 RB

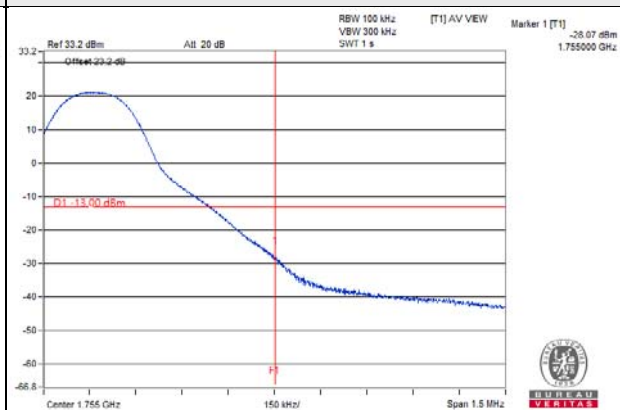

50 RB

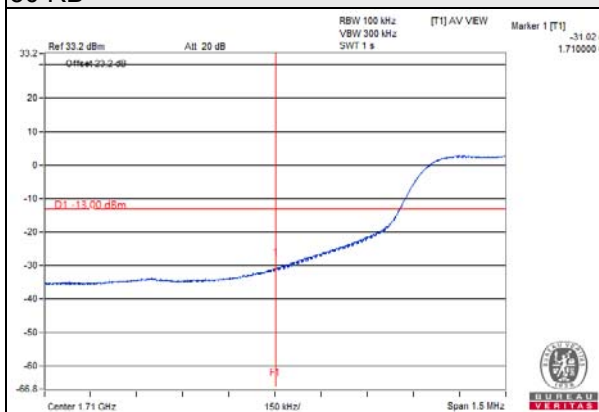


50 RB

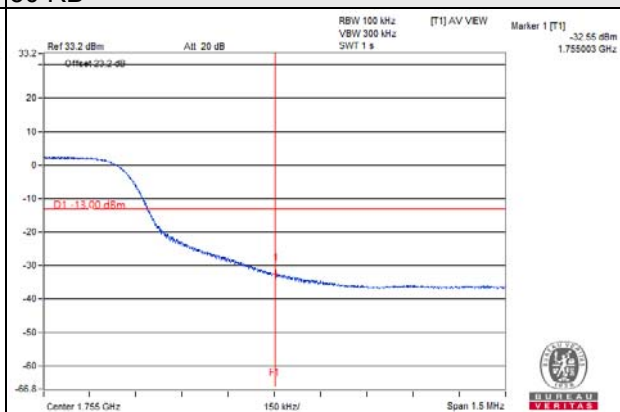

LTE Band 4 Channel Bandwidth: 15MHz


Channel 20025

1 RB

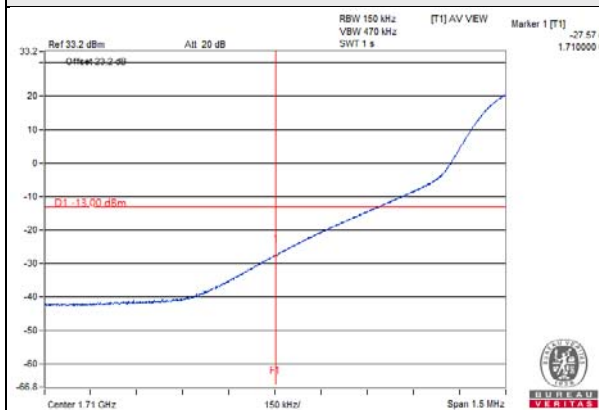


Channel 20325


1 RB

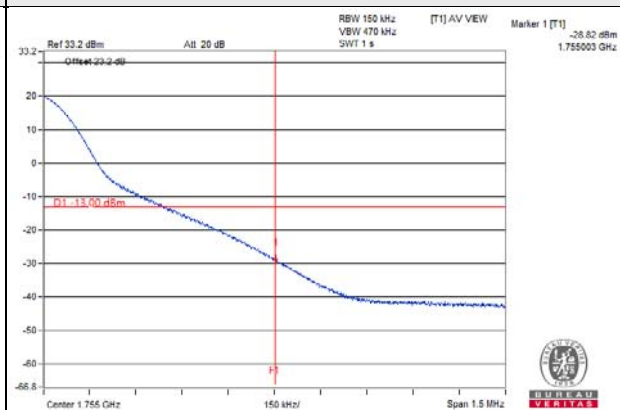

75 RB

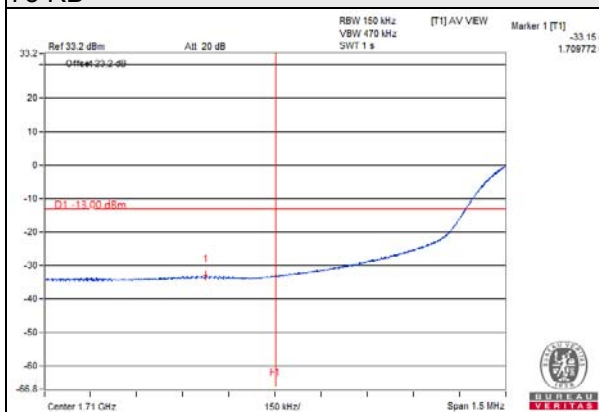


75 RB

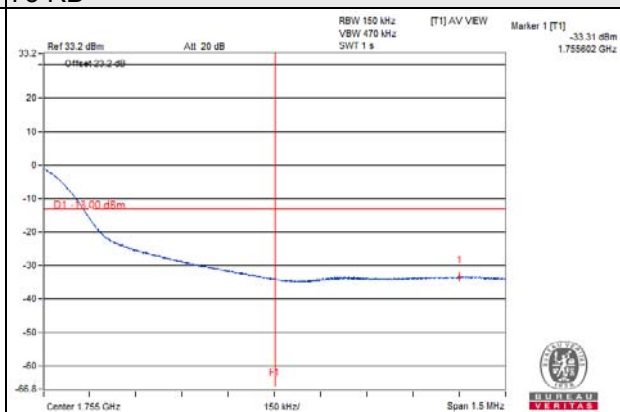

LTE Band 4 Channel Bandwidth: 20MHz


Channel 20050

1 RB

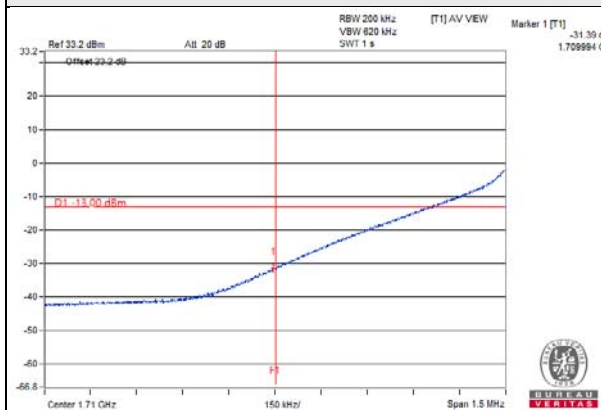


Channel 20300


1 RB

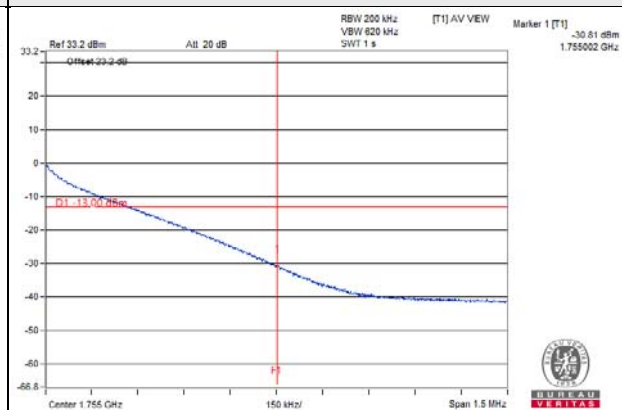

100 RB

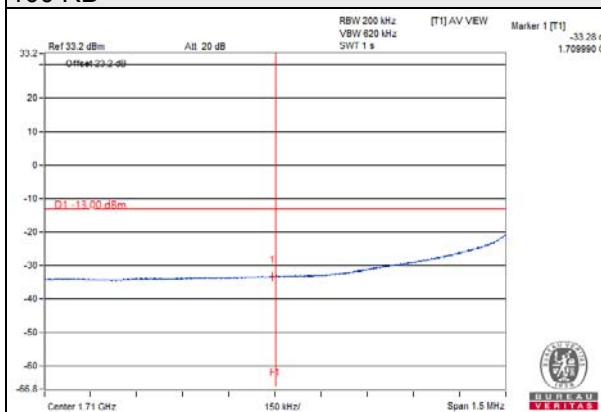


100 RB

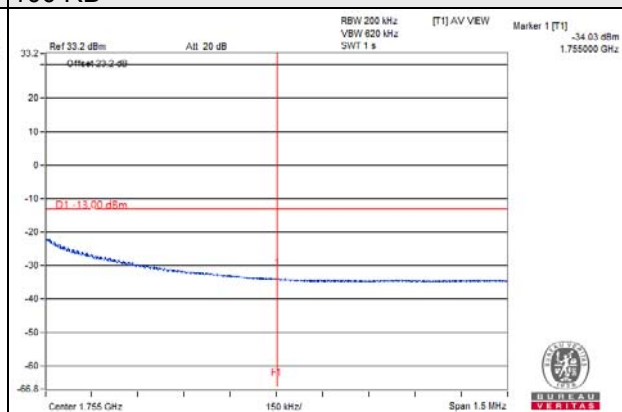

LTE Band 12 Channel Bandwidth: 1.4MHz


Channel 23017

1 RB

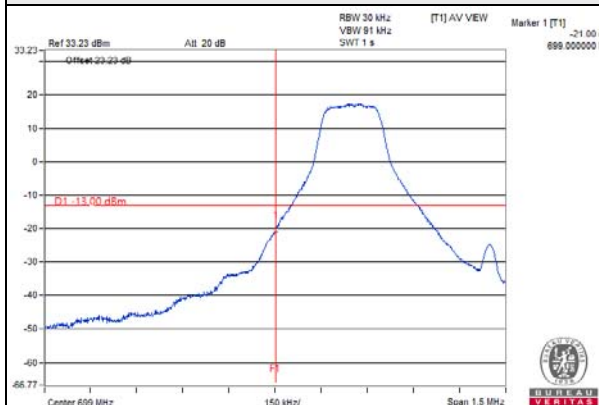


Channel 23173


1 RB

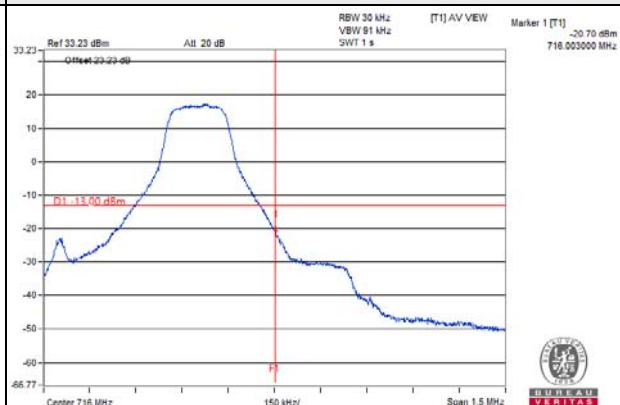

6 RB

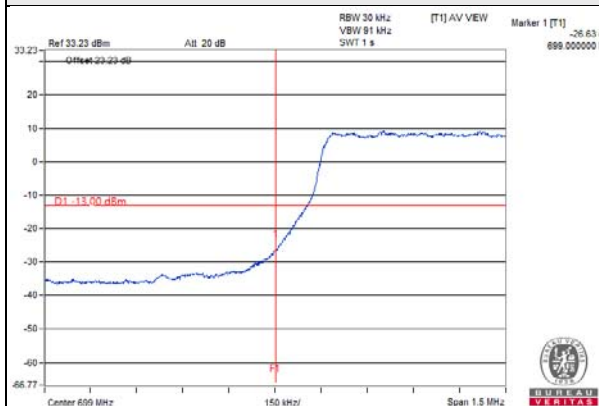


6 RB

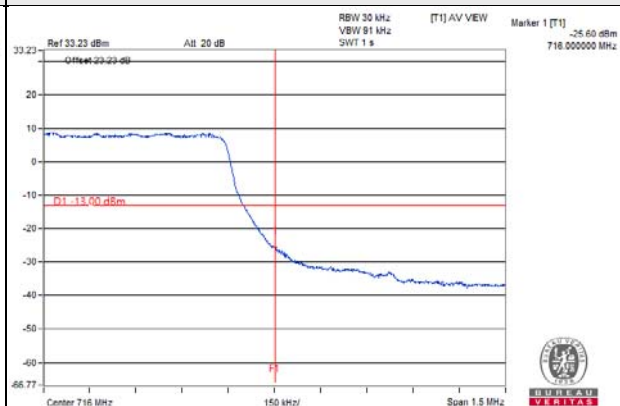

LTE Band 12 Channel Bandwidth: 3MHz


Channel 23025

1 RB

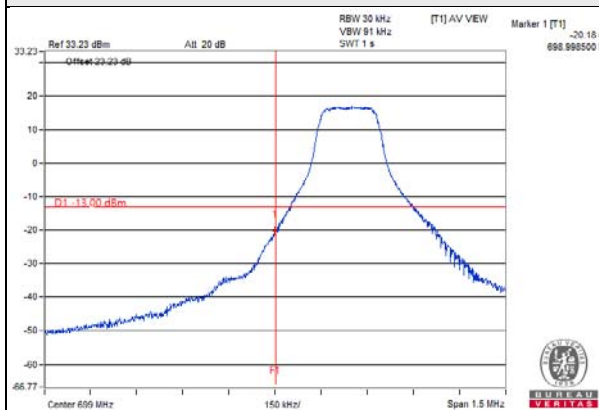


Channel 23165


1 RB

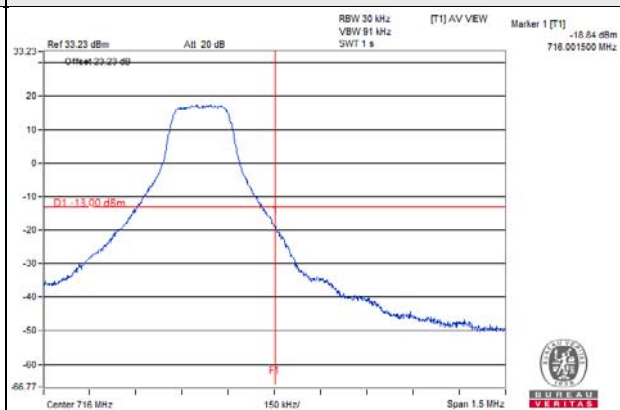

15 RB

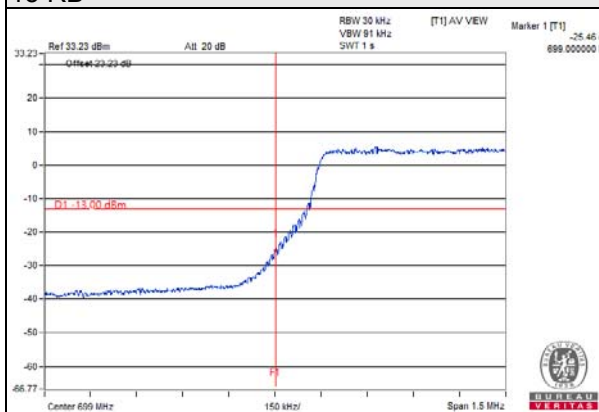


15 RB

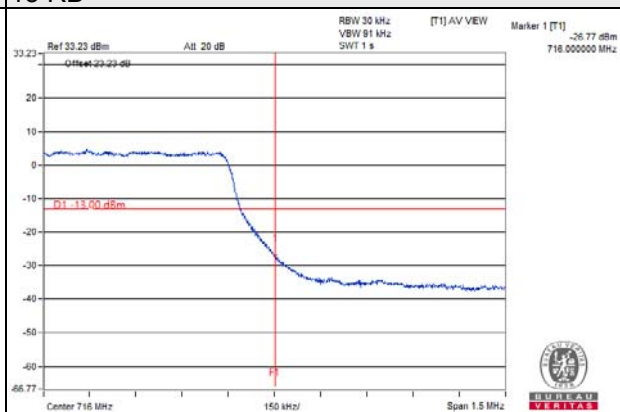

LTE Band 12 Channel Bandwidth: 5MHz


Channel 23035

1 RB

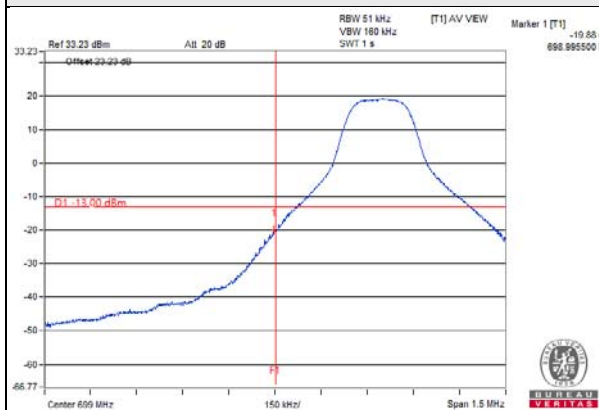


Channel 23155


1 RB

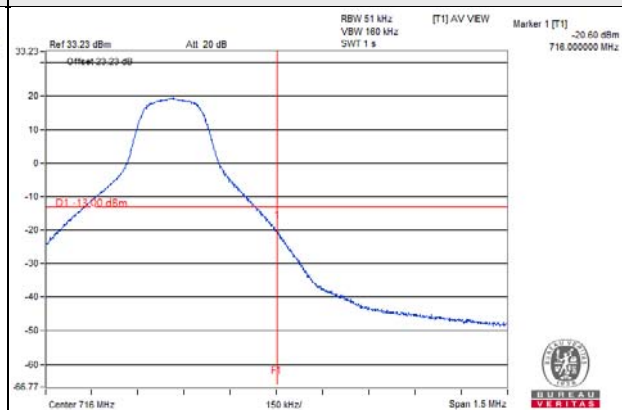

25 RB

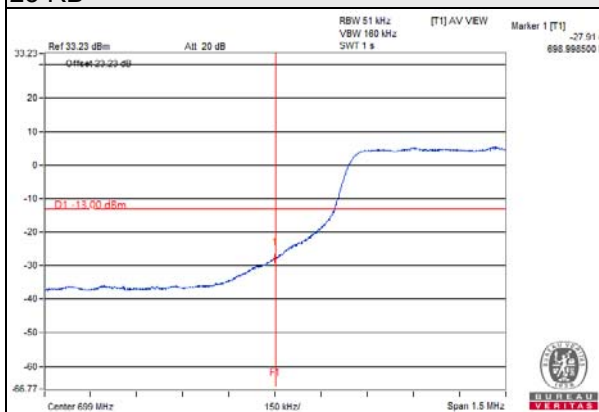


25 RB

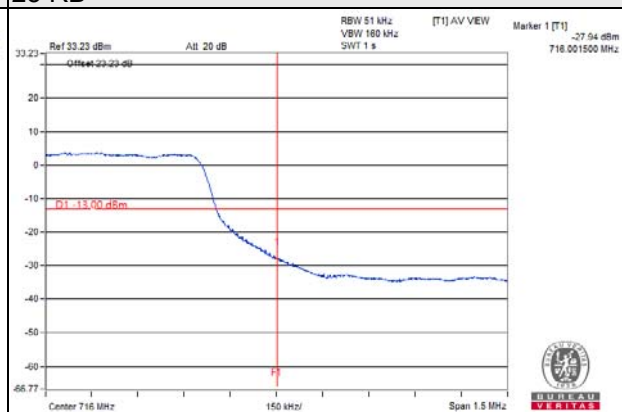

LTE Band 12 Channel Bandwidth: 10MHz


Channel 23060

1 RB

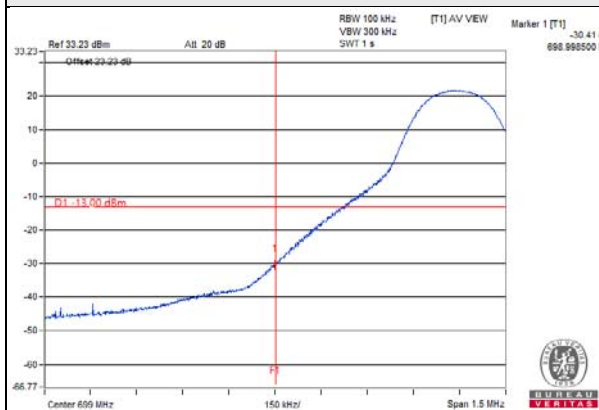


Channel 23130


1 RB

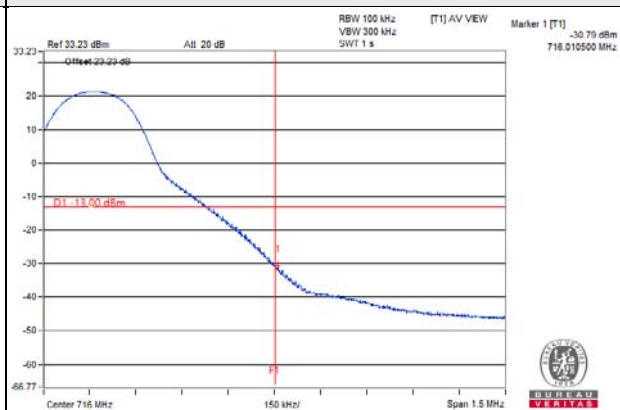

50 RB

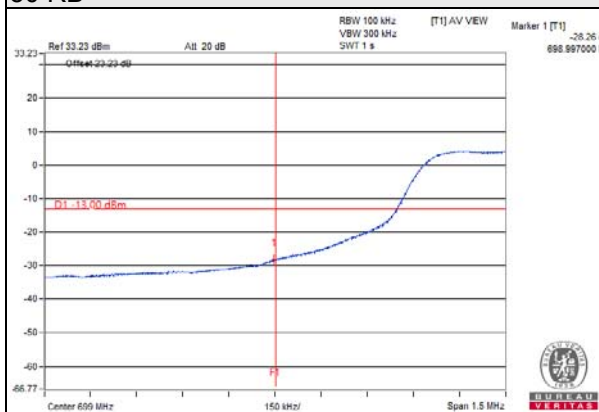

50 RB

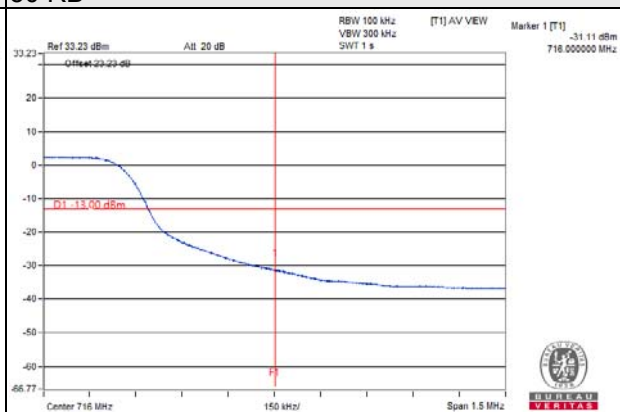


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.6.2 Test Setup

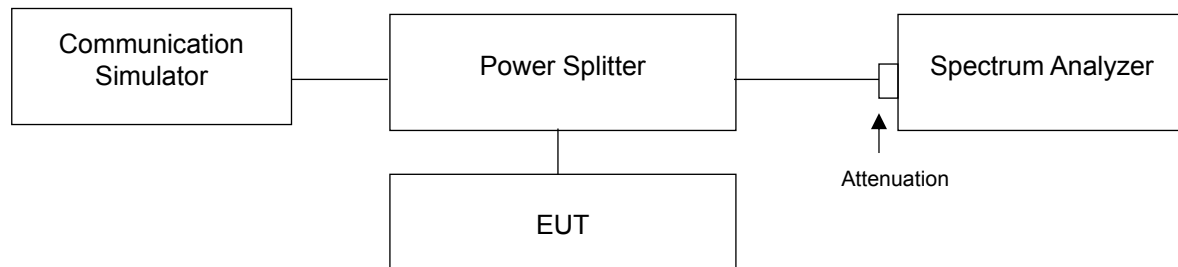

4.6.3 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.6.4 Test Results


LTE Band 4							
Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	5.45	6.21	19965	1711.5	5.39	6.23
20175	1732.5	5.41	6.18	20175	1732.5	5.36	6.21
20393	1754.3	5.45	6.26	20385	1753.5	5.44	6.31
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	5.41	6.27	20000	1715	5.35	6.20
20175	1732.5	5.39	6.23	20175	1732.5	5.36	6.18
20375	1752.5	5.45	6.32	20350	1750	5.42	6.27
Channel Bandwidth 15MHz				Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	5.50	6.17	20050	1720	5.30	6.12
20175	1732.5	5.53	6.18	20175	1732.5	5.33	6.14
20325	1747.5	5.58	6.26	20300	1745	5.39	6.22

Spectrum Plot of Worst Value


1.4MHz / 16QAM

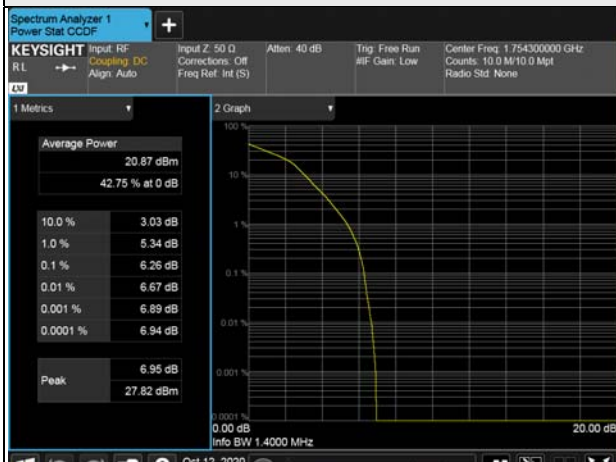


3MHz / 16QAM

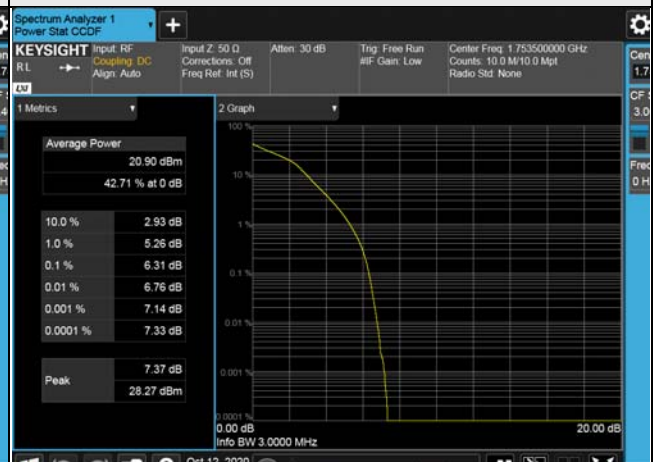


5MHz / 16QAM

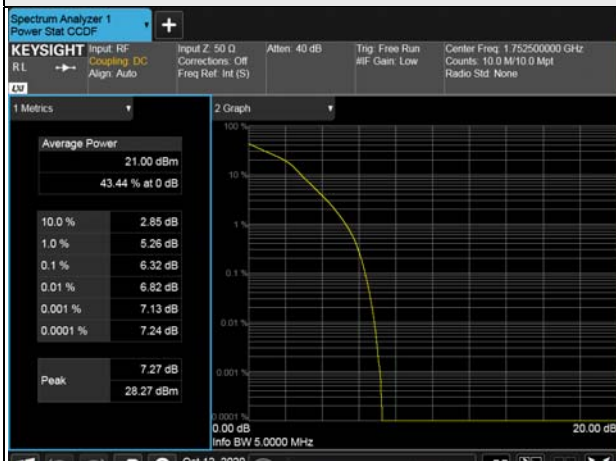


10MHz / 16QAM

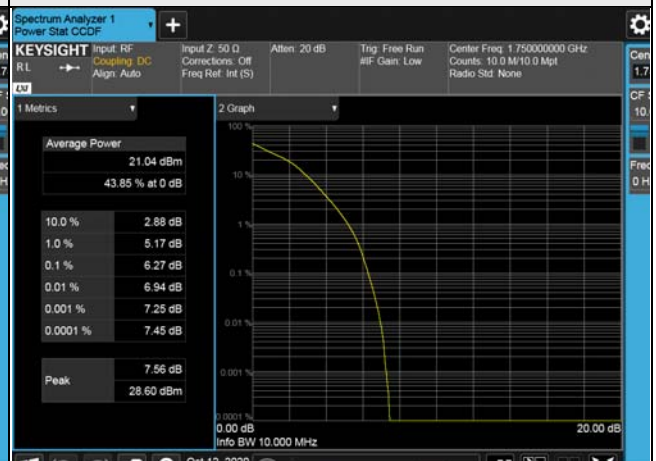


15MHz / 16QAM

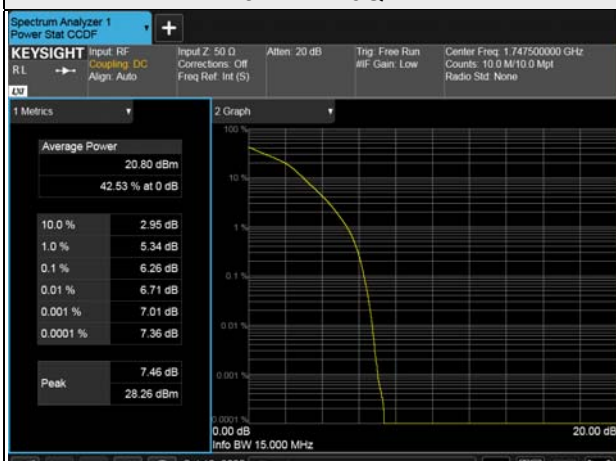

20MHz / 16QAM

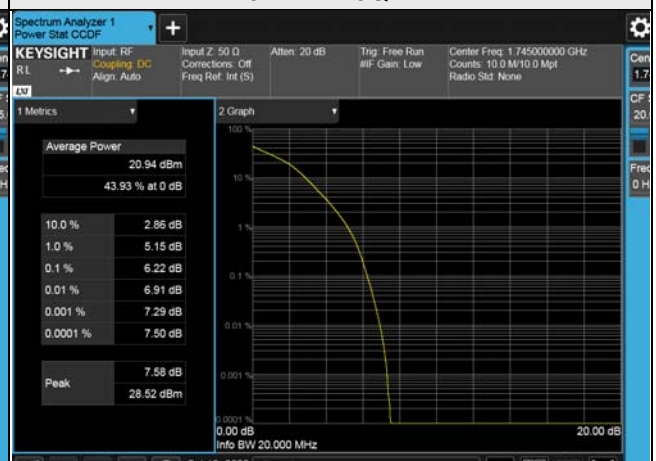

LTE Band 12							
Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	4.98	5.77	23025	700.5	4.95	5.82
23095	707.5	5.20	5.98	23095	707.5	5.17	6.05
23173	715.3	4.98	5.75	23165	714.5	4.97	5.77
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	5.03	5.86	23060	704	5.23	6.01
23095	707.5	5.14	6.04	23095	707.5	5.07	6.00
23155	713.5	4.93	5.76	23130	711	4.79	5.73

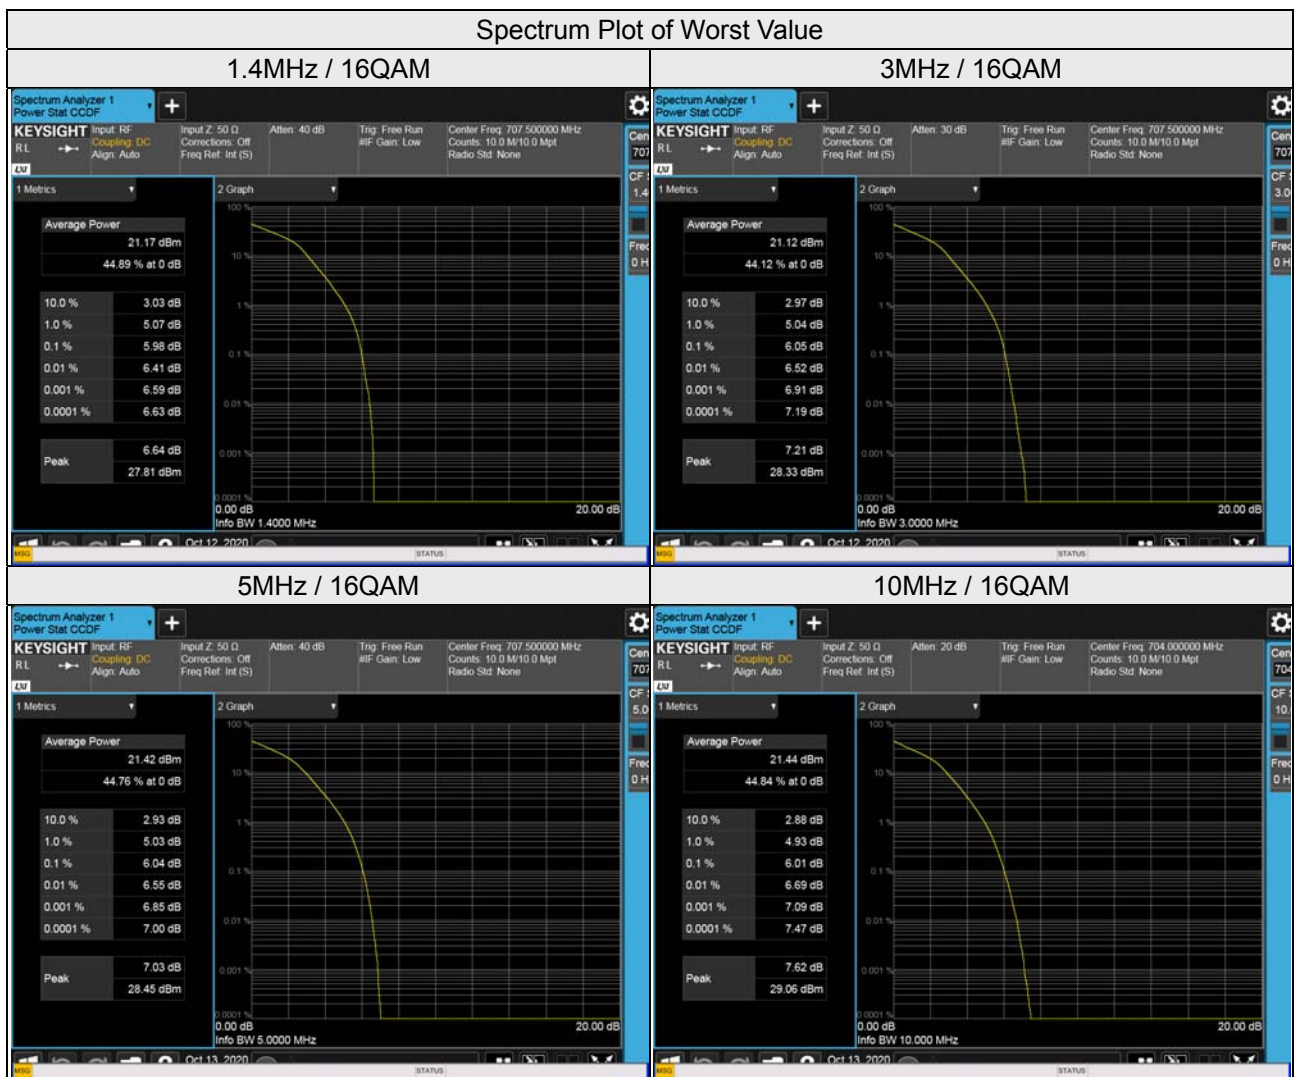

4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

According to FCC 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.


According to FCC 27.53(h) AWS emission limits— General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB.

According to FCC 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to FCC 27.53(f) For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

4.7.2 Test Setup

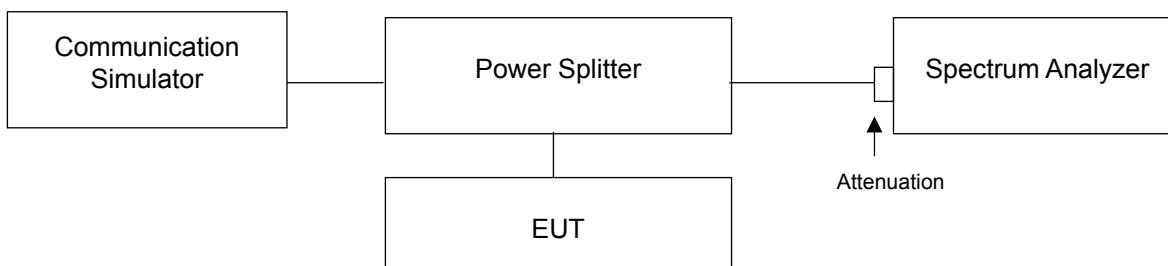

4.7.3 Test Procedure


- a. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 9 kHz to the tenth harmonic of the highest fundamental frequency, it shall be connected to the 20dB pad attenuated the carried frequency.

4.7.4 Test Results


LTE Band 4 Channel Bandwidth: 1.4MHz

Channel 19957


Frequency Range : 9kHz~1GHz

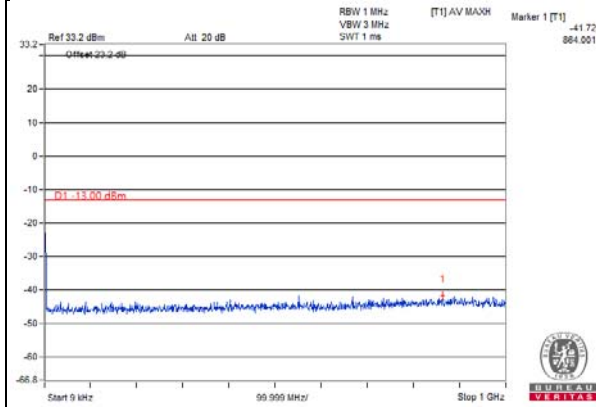

Frequency Range : 1GHz~10GHz

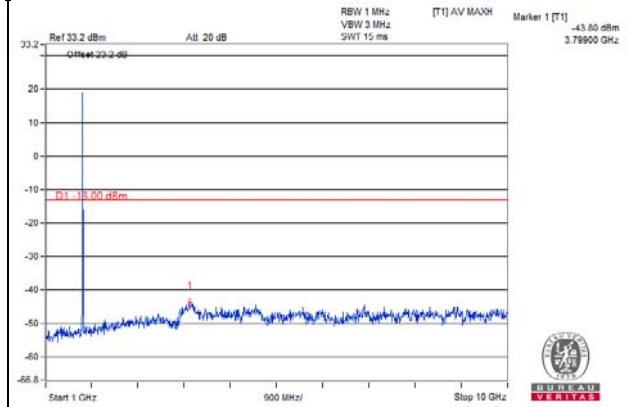

Frequency Range : 10GHz~20GHz

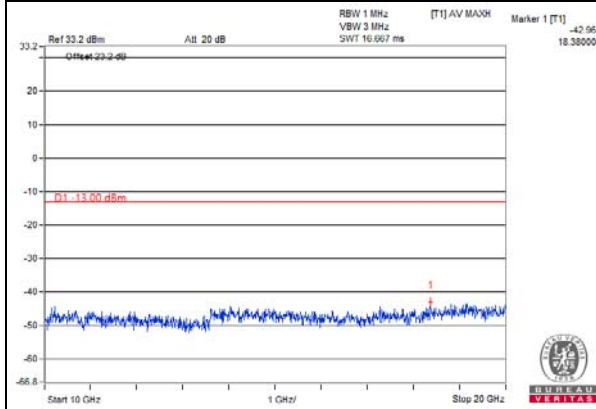


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 1.4MHz

Channel 20175


Frequency Range : 9kHz~1GHz

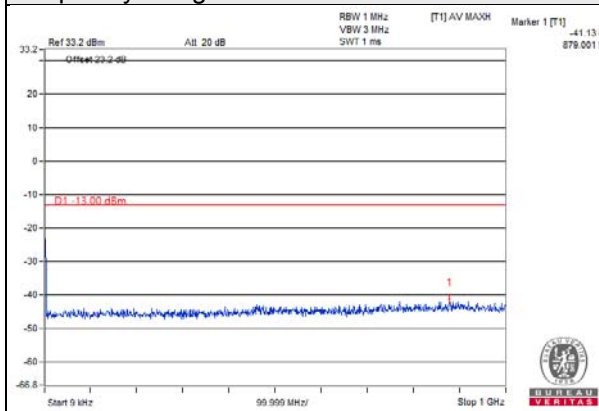

Frequency Range : 1GHz~10GHz

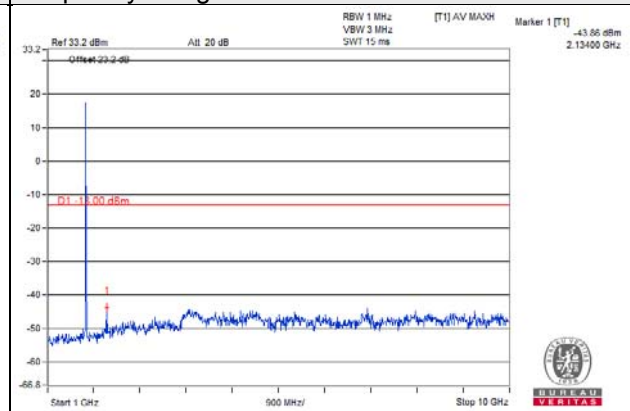

Frequency Range : 10GHz~20GHz

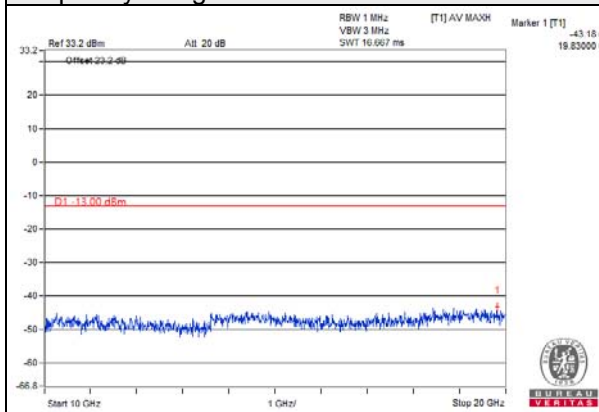


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 1.4MHz

Channel 20393


Frequency Range : 9kHz~1GHz

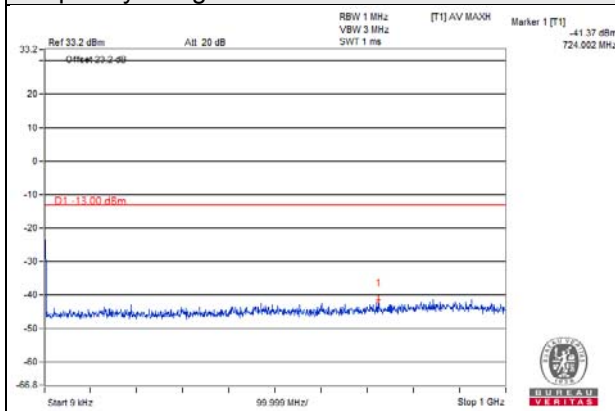

Frequency Range : 1GHz~10GHz

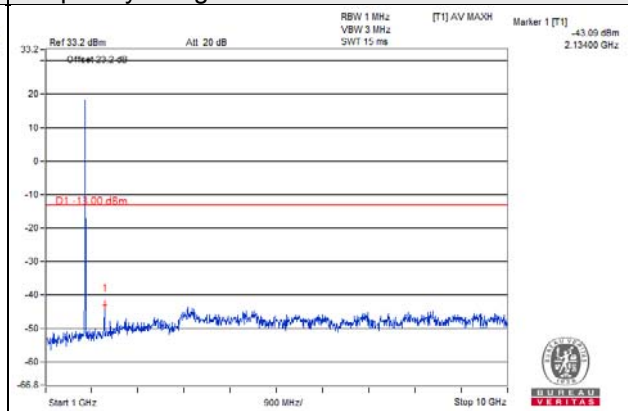

Frequency Range : 10GHz~20GHz

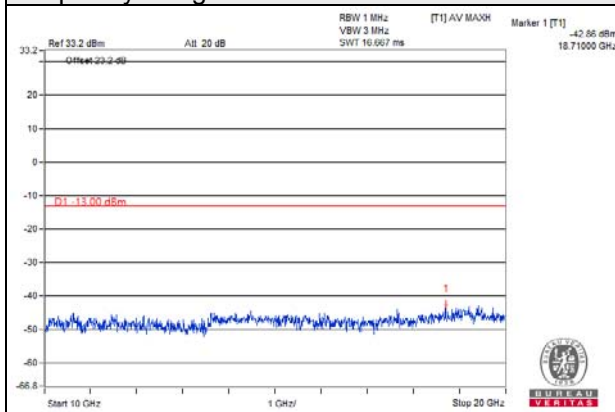


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 3MHz

Channel 19965


Frequency Range : 9kHz~1GHz

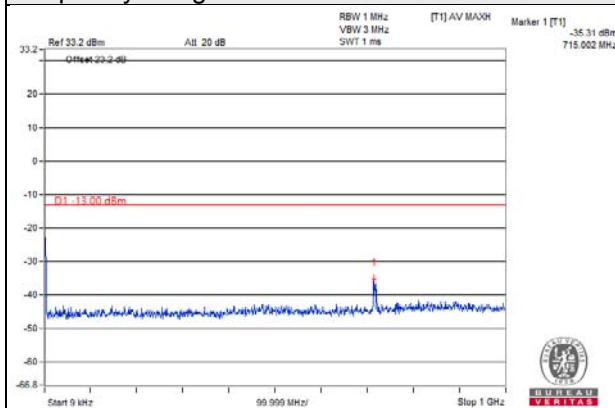

Frequency Range : 1GHz~10GHz

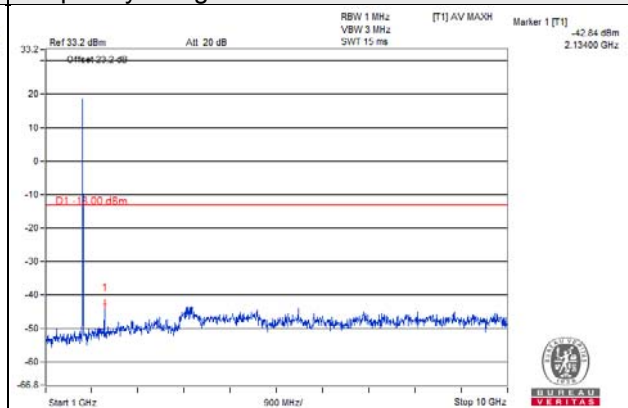

Frequency Range : 10GHz~20GHz

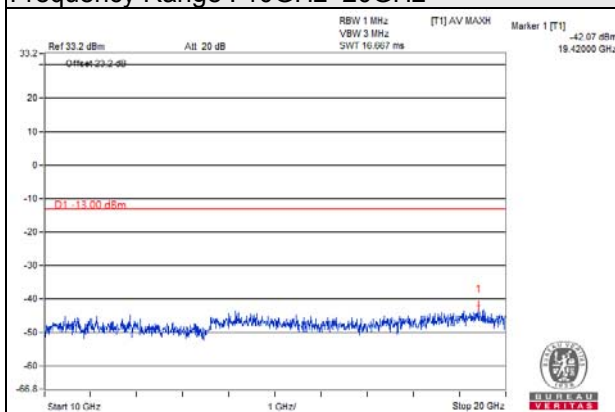


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 3MHz

Channel 20175



Frequency Range : 9kHz~1GHz

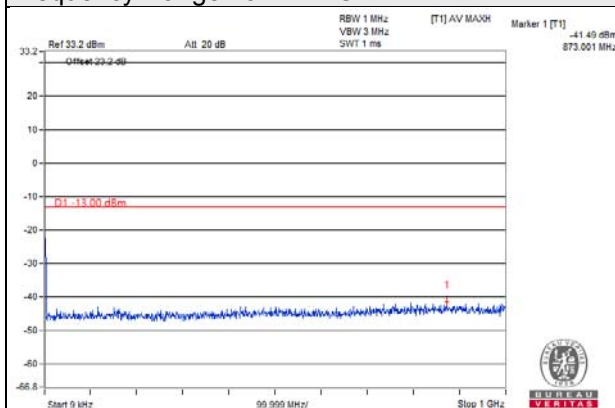

Frequency Range : 1GHz~10GHz

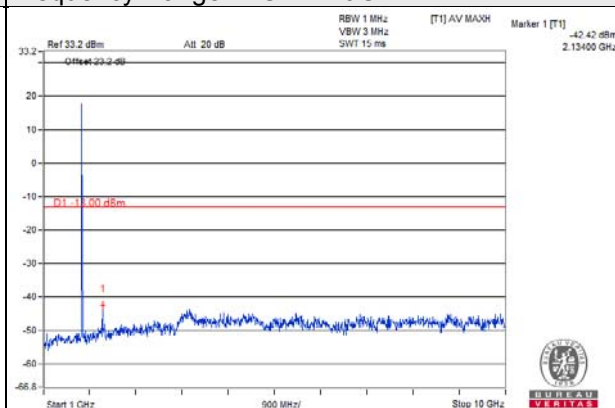

Frequency Range : 10GHz~20GHz

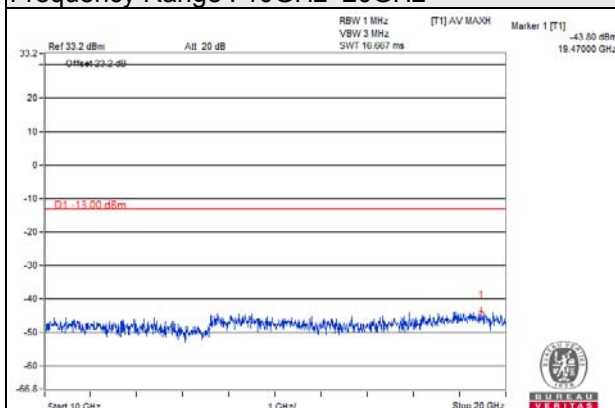


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 3MHz

Channel 20385


Frequency Range : 9kHz~1GHz

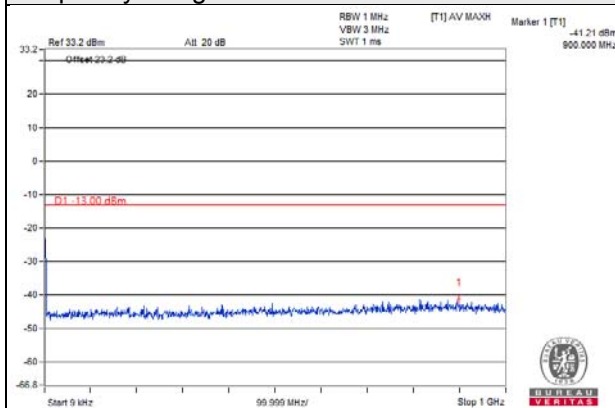

Frequency Range : 1GHz~10GHz

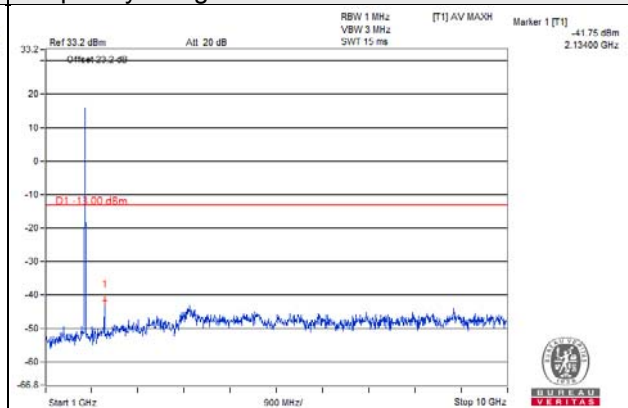

Frequency Range : 10GHz~20GHz

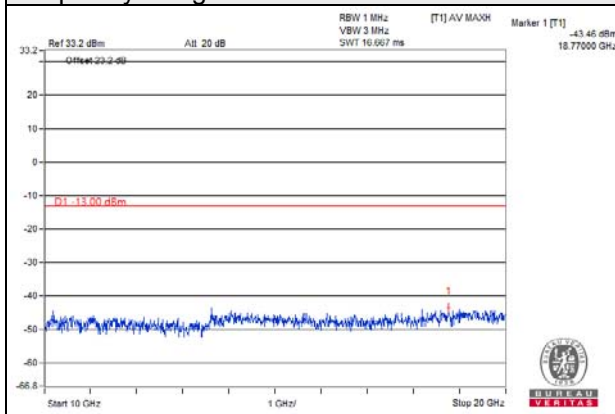


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 5MHz

Channel 19975


Frequency Range : 9kHz~1GHz

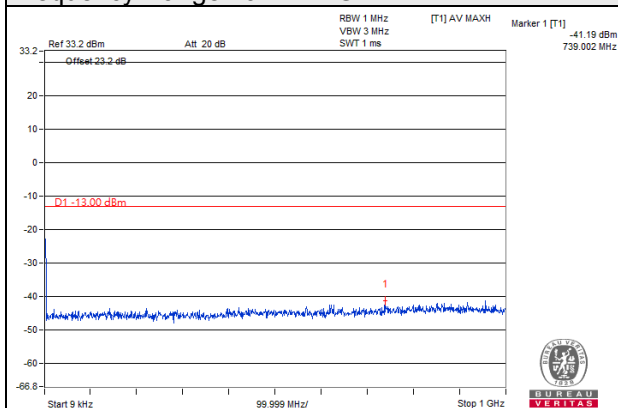

Frequency Range : 1GHz~10GHz

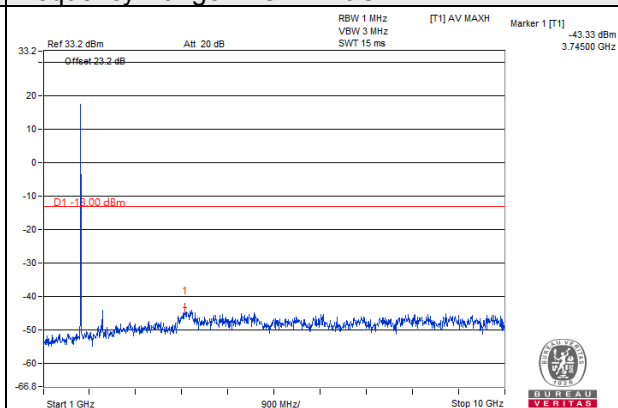

Frequency Range : 10GHz~20GHz

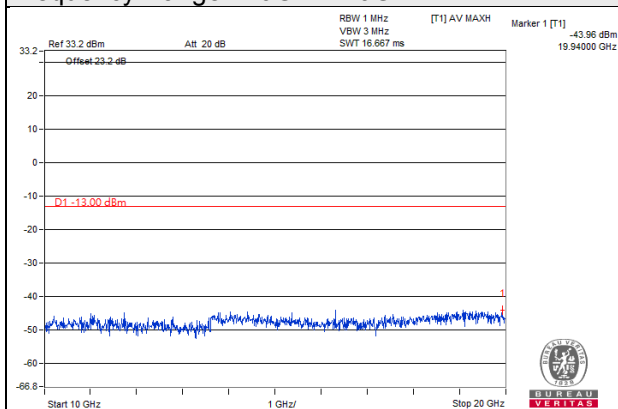


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 5MHz

Channel 20175


Frequency Range : 9kHz~1GHz

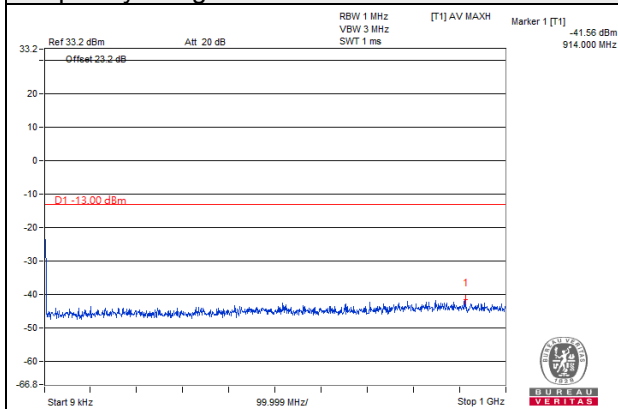

Frequency Range : 1GHz~10GHz

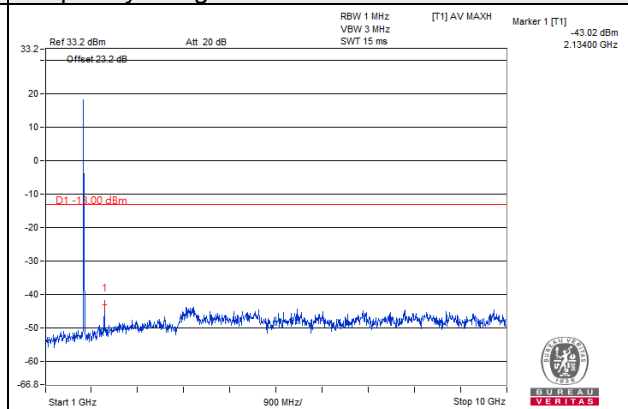

Frequency Range : 10GHz~20GHz

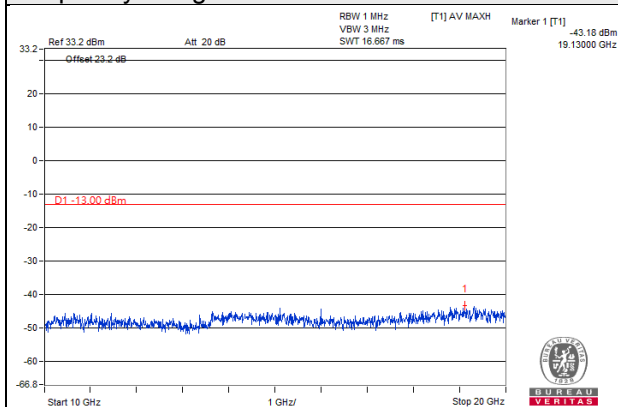


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 5MHz

Channel 20375


Frequency Range : 9kHz~1GHz

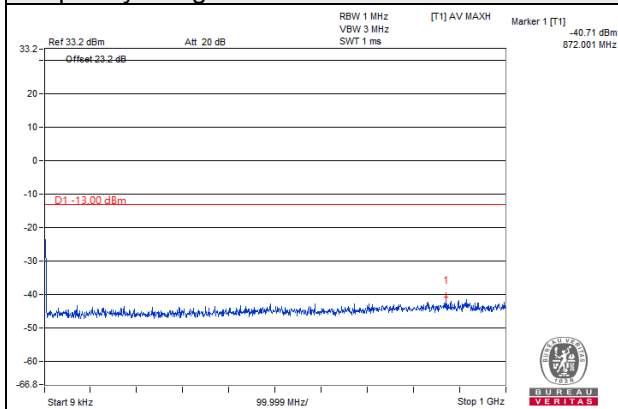

Frequency Range : 1GHz~10GHz

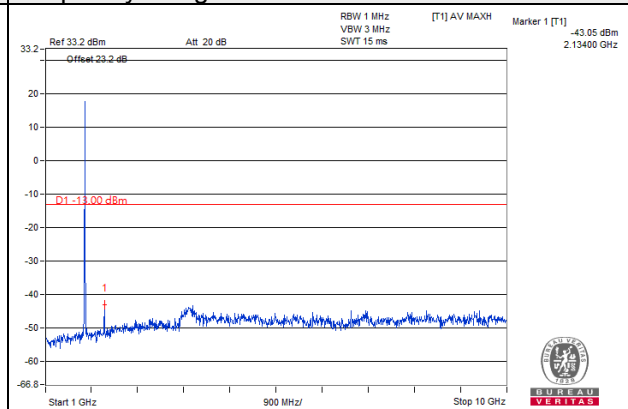

Frequency Range : 10GHz~20GHz

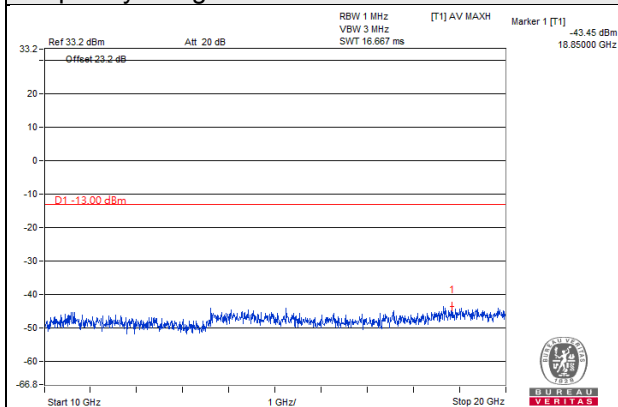


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 10MHz

Channel 20000


Frequency Range : 9kHz~1GHz

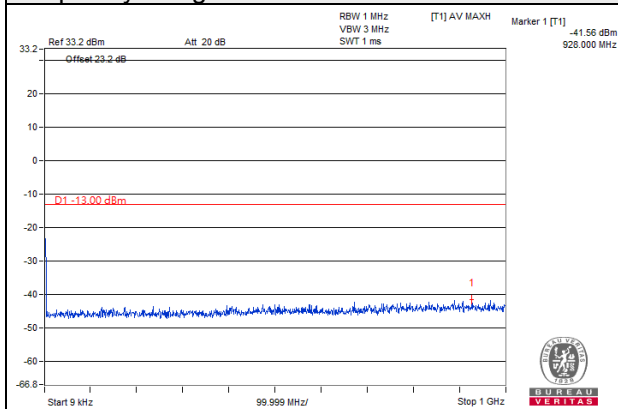

Frequency Range : 1GHz~10GHz

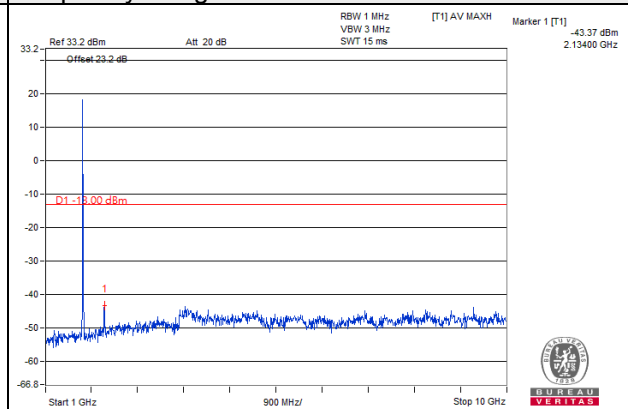

Frequency Range : 10GHz~20GHz

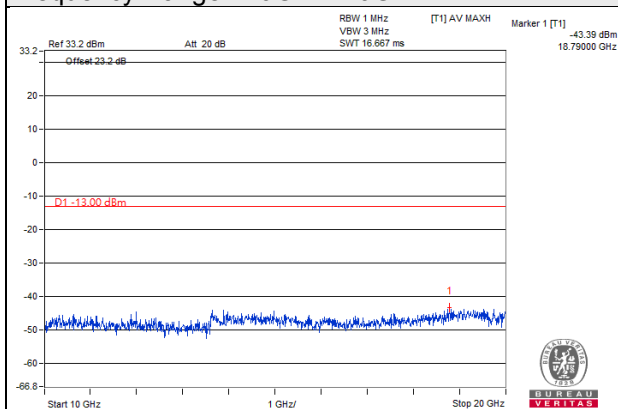


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 10MHz

Channel 20175


Frequency Range : 9kHz~1GHz

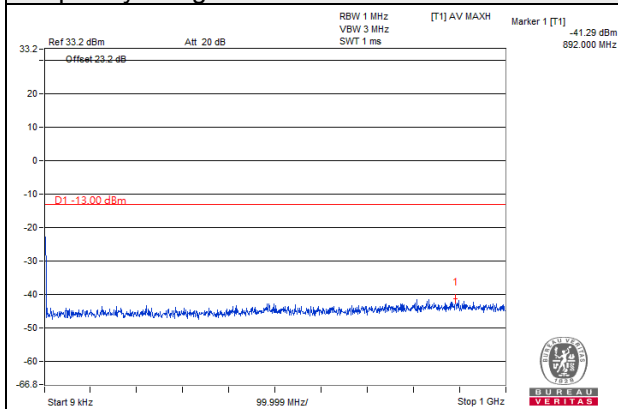

Frequency Range : 1GHz~10GHz

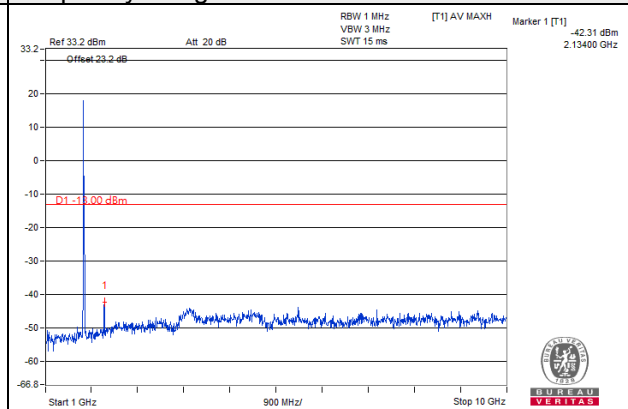

Frequency Range : 10GHz~20GHz

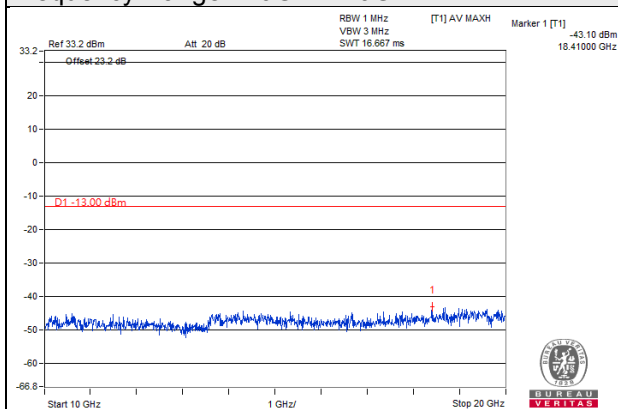


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 10MHz

Channel 20350


Frequency Range : 9kHz~1GHz

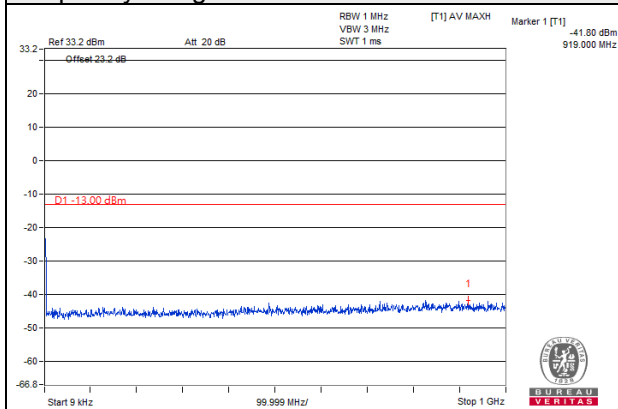

Frequency Range : 1GHz~10GHz

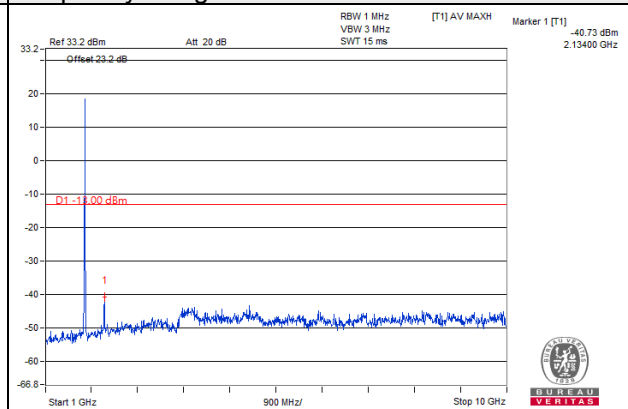

Frequency Range : 10GHz~20GHz

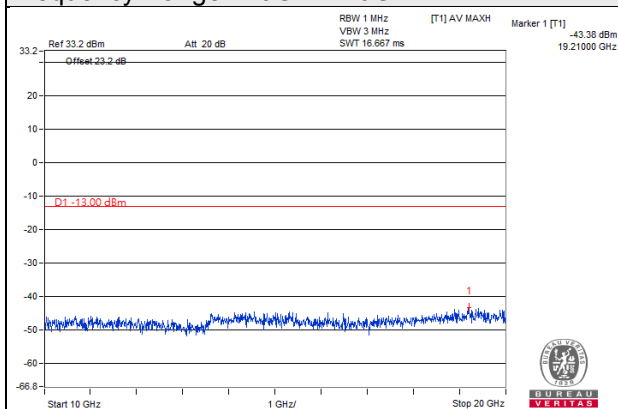


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 15MHz

Channel 20025


Frequency Range : 9kHz~1GHz

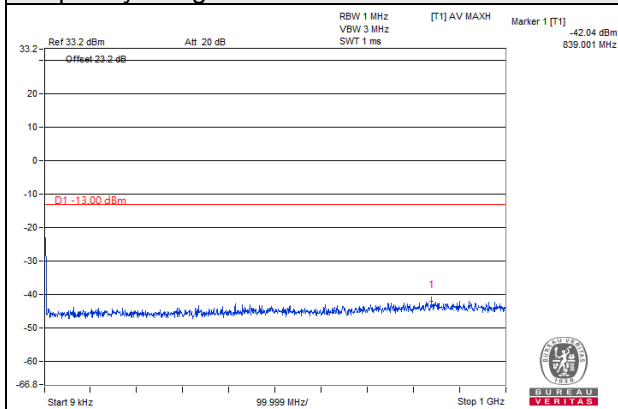

Frequency Range : 1GHz~10GHz

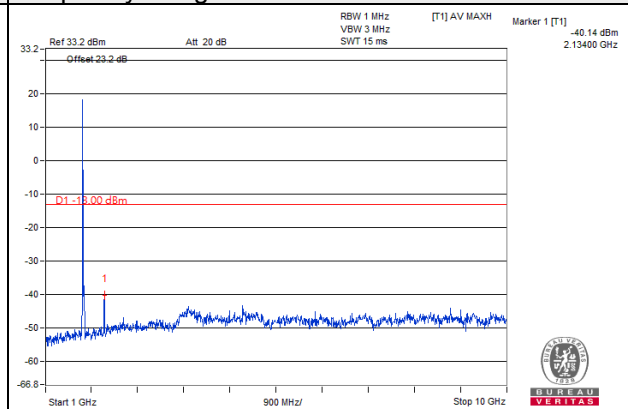

Frequency Range : 10GHz~20GHz

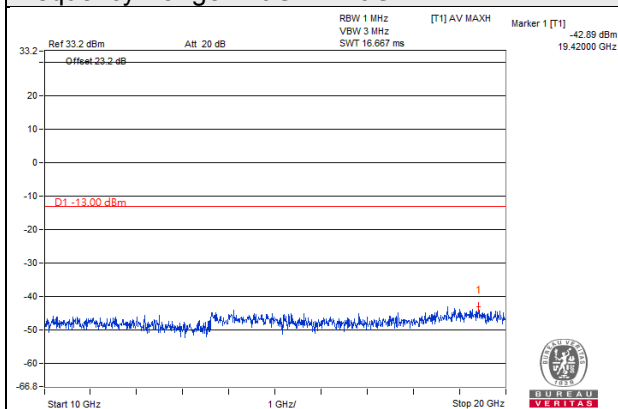


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 15MHz

Channel 20175


Frequency Range : 9kHz~1GHz

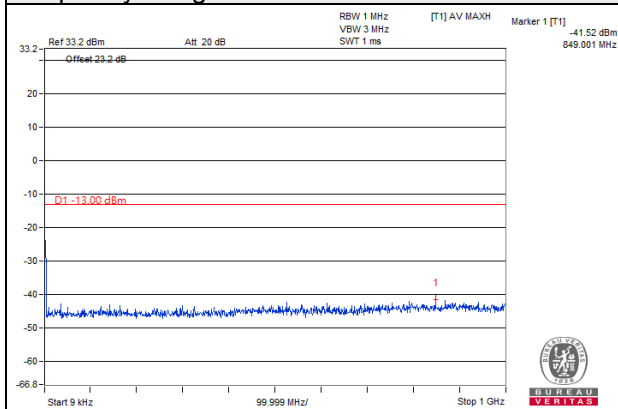

Frequency Range : 1GHz~10GHz

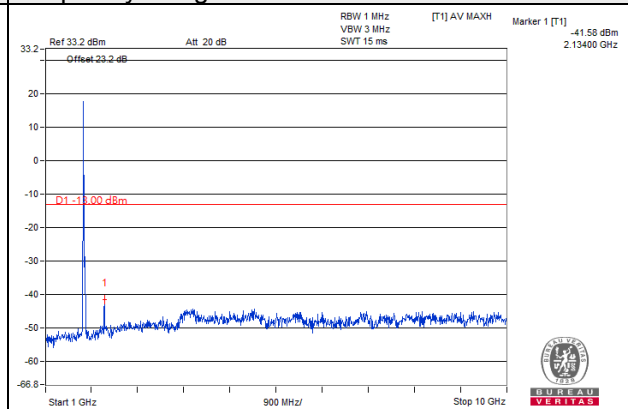

Frequency Range : 10GHz~20GHz

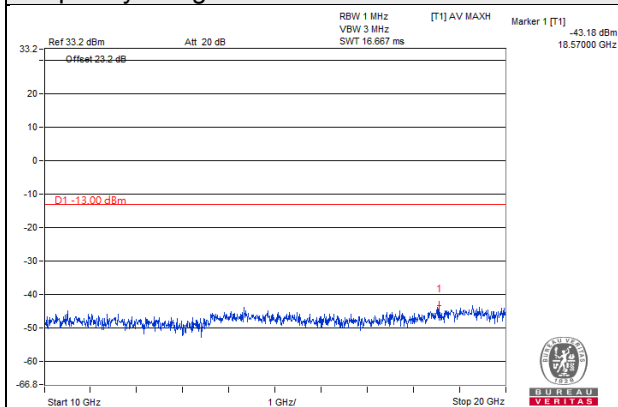


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 15MHz

Channel 20325


Frequency Range : 9kHz~1GHz

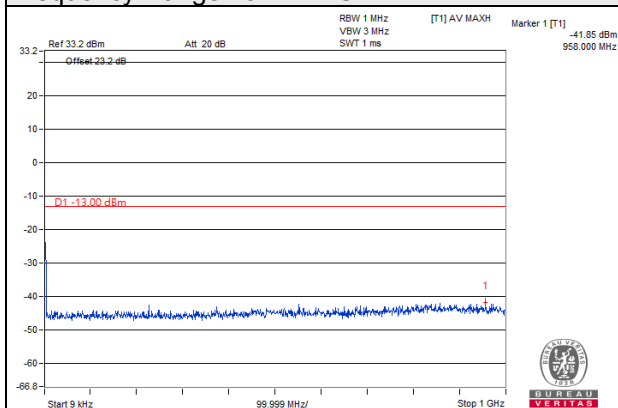

Frequency Range : 1GHz~10GHz

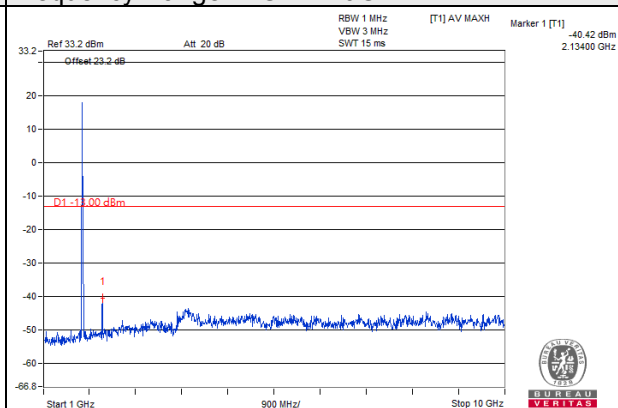

Frequency Range : 10GHz~20GHz

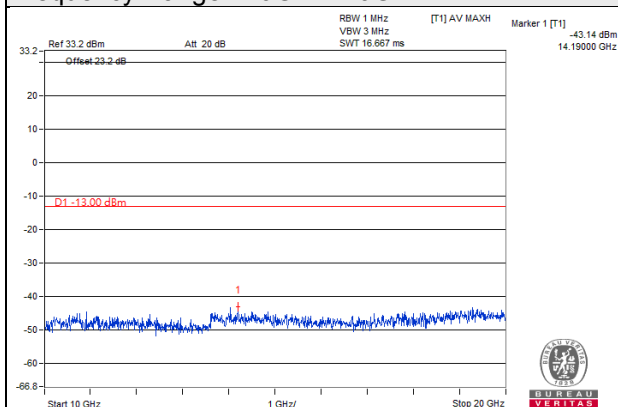


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 20MHz

Channel 20050


Frequency Range : 9kHz~1GHz

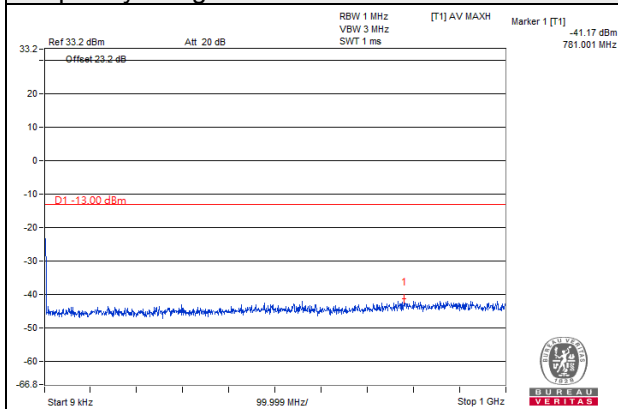

Frequency Range : 1GHz~10GHz

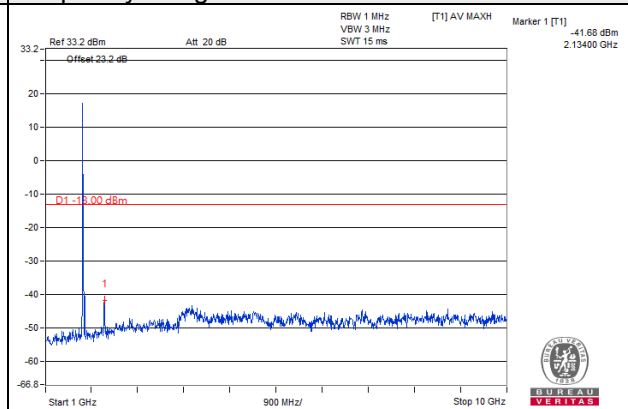

Frequency Range : 10GHz~20GHz

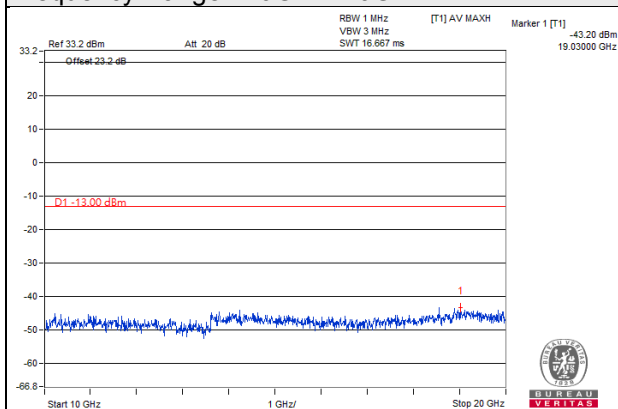


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 20MHz

Channel 20175


Frequency Range : 9kHz~1GHz

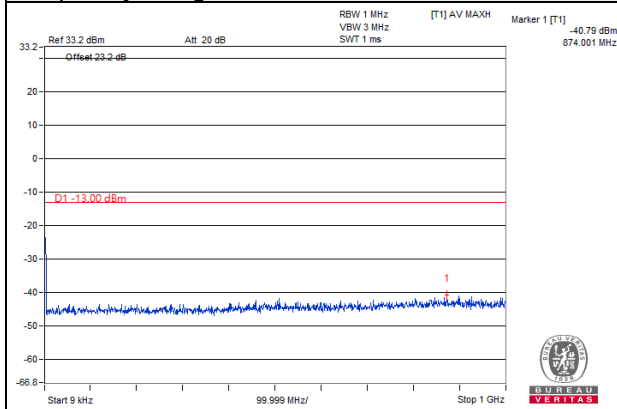

Frequency Range : 1GHz~10GHz

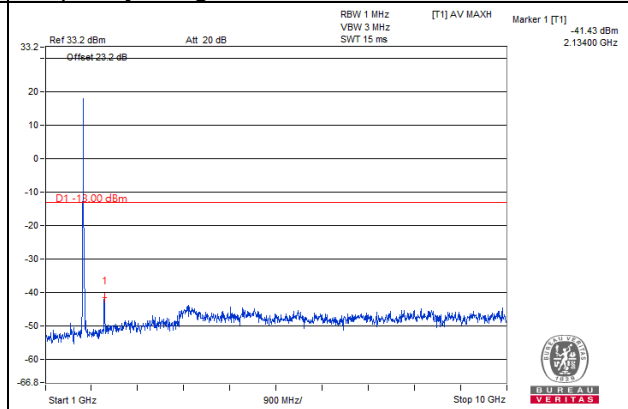

Frequency Range : 10GHz~20GHz

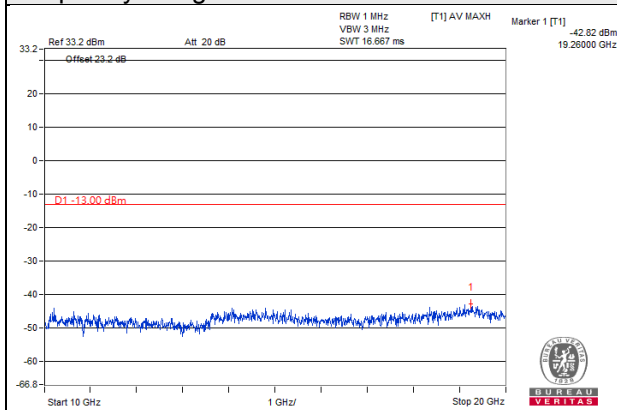


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 4 Channel Bandwidth: 20MHz

Channel 20300


Frequency Range : 9kHz~1GHz

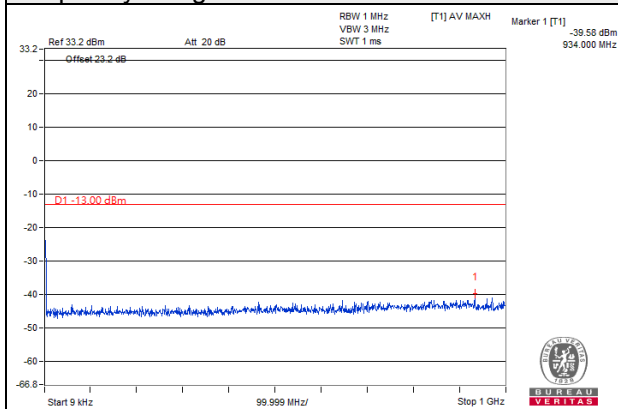

Frequency Range : 1GHz~10GHz

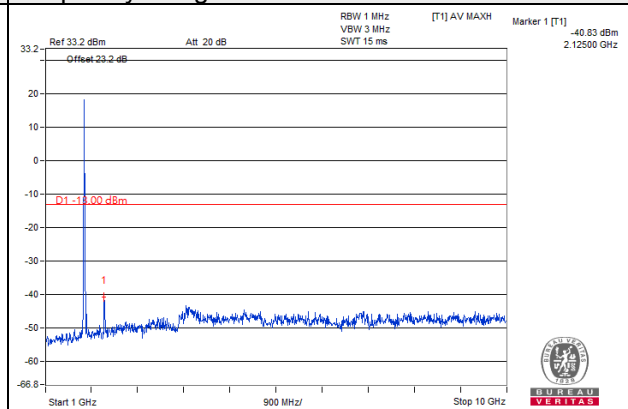

Frequency Range : 10GHz~20GHz

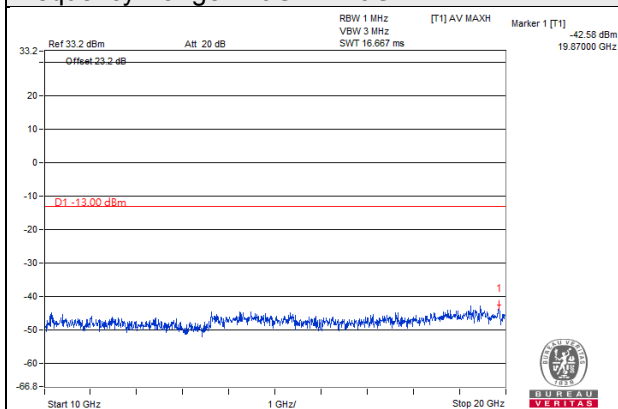


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 12 Channel Bandwidth: 1.4MHz

Channel 23017

Frequency Range : 9kHz~1GHz

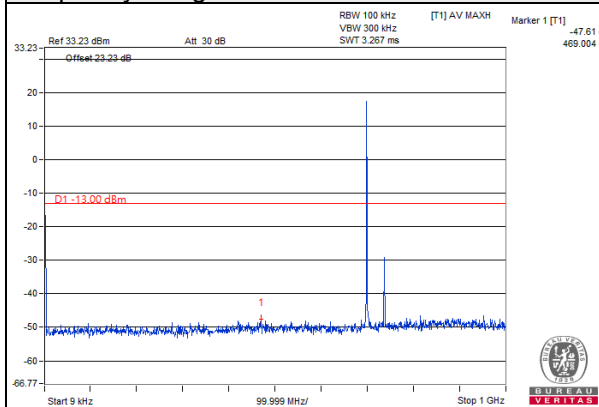


Frequency Range : 1GHz~10GHz

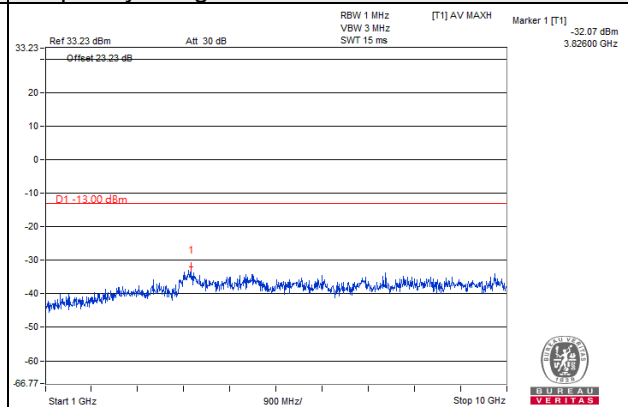


Channel 23095

Frequency Range : 9kHz~1GHz

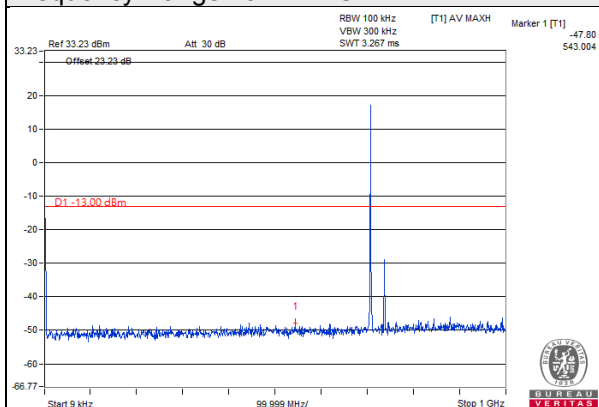


Frequency Range : 1GHz~10GHz

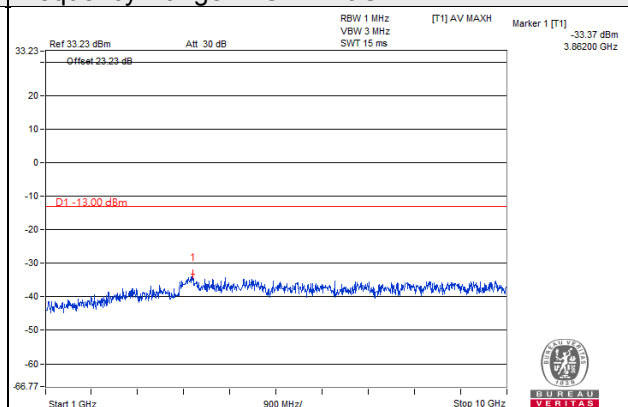


Channel 23173

Frequency Range : 9kHz~1GHz

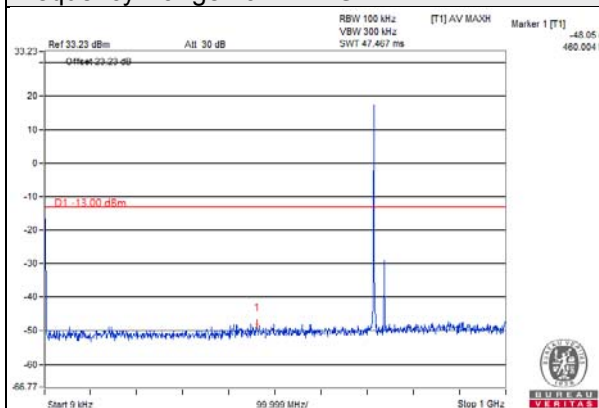

Frequency Range : 1GHz~10GHz

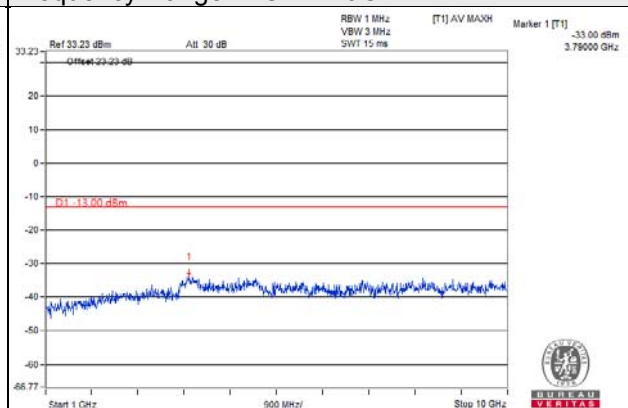


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 12 Channel Bandwidth: 3MHz

Channel 23025

Frequency Range : 9kHz~1GHz

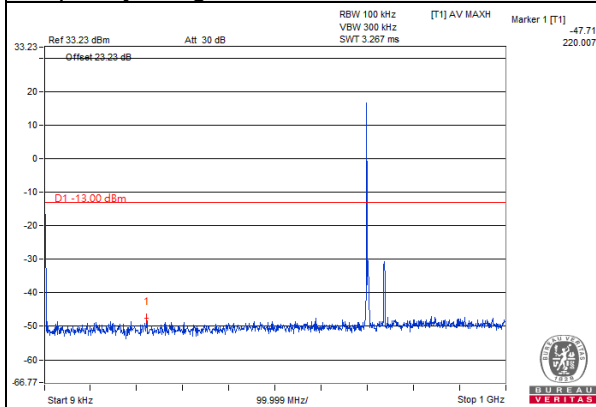


Frequency Range : 1GHz~10GHz

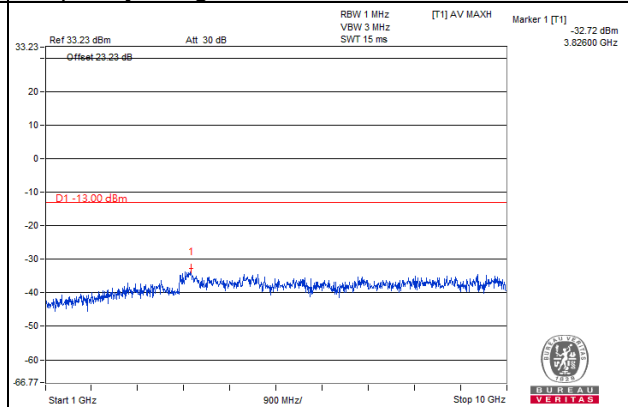


Channel 23095

Frequency Range : 9kHz~1GHz

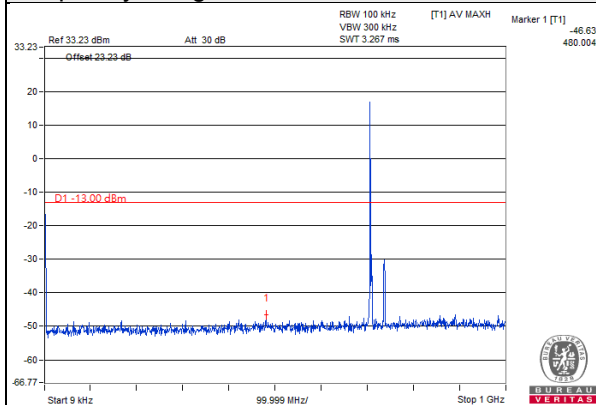


Frequency Range : 1GHz~10GHz

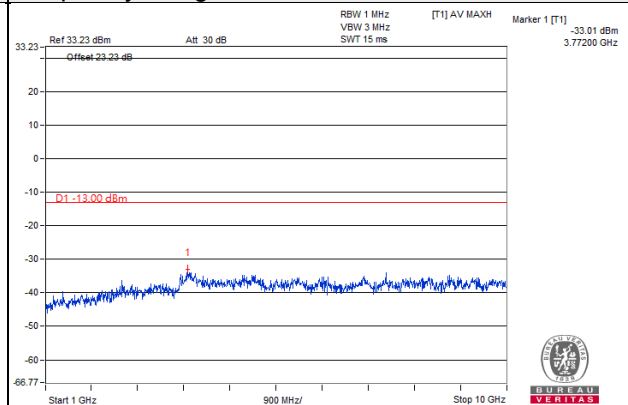


Channel 23165

Frequency Range : 9kHz~1GHz

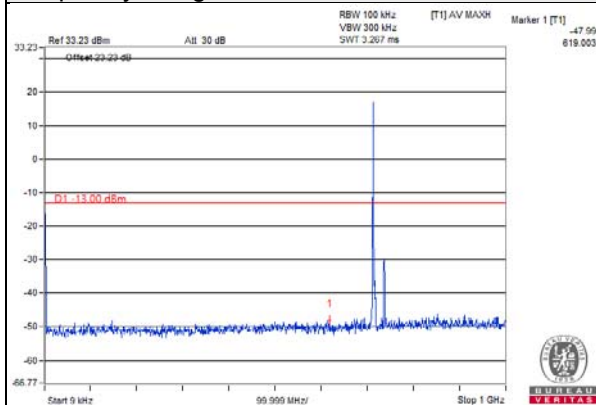

Frequency Range : 1GHz~10GHz

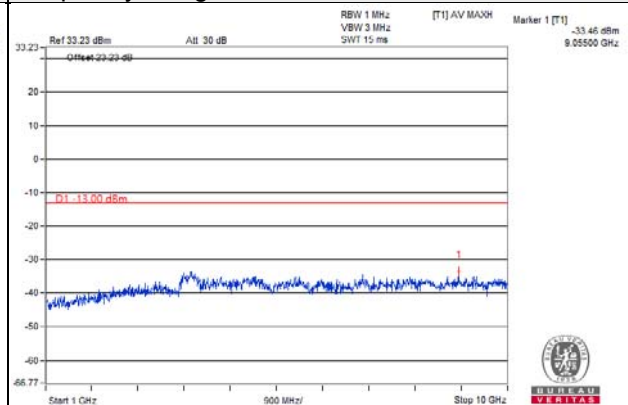


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 12 Channel Bandwidth: 5MHz

Channel 23035

Frequency Range : 9kHz~1GHz

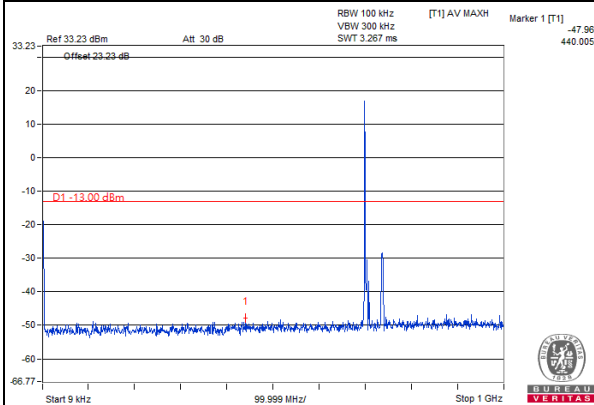


Frequency Range : 1GHz~10GHz

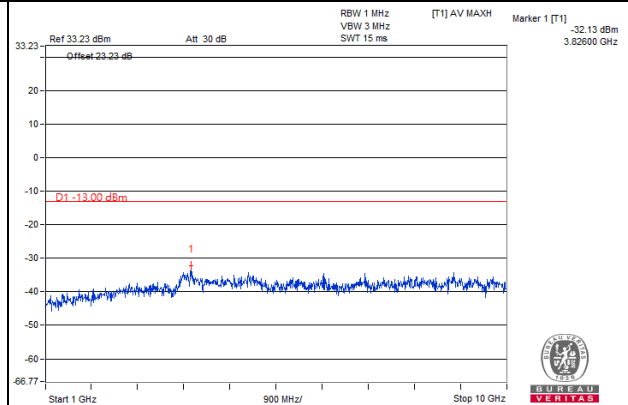


Channel 23095

Frequency Range : 9kHz~1GHz

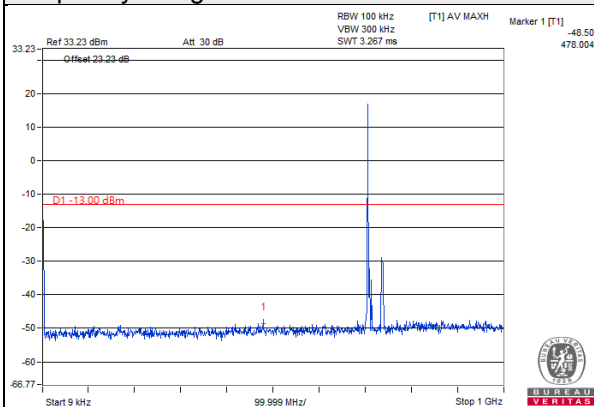


Frequency Range : 1GHz~10GHz

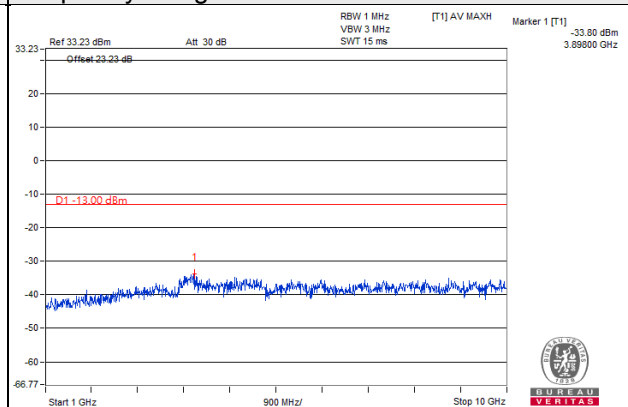


Channel 23155

Frequency Range : 9kHz~1GHz

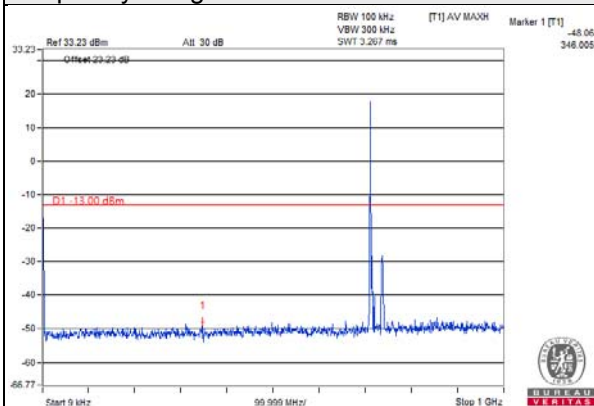

Frequency Range : 1GHz~10GHz

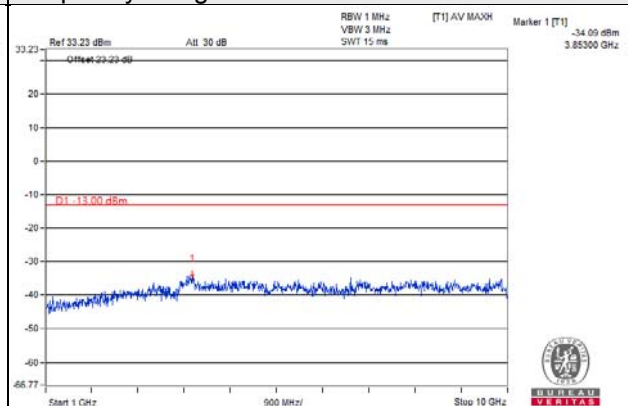


Note: The signal of 9kHz is IF signal from test instrument.


LTE Band 12 Channel Bandwidth: 10MHz

Channel 23060

Frequency Range : 9kHz~1GHz

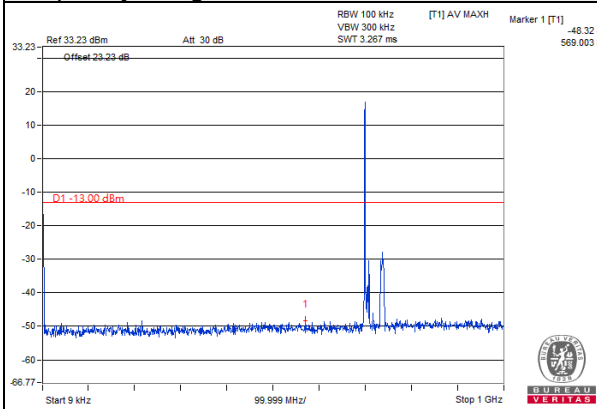


Frequency Range : 1GHz~10GHz

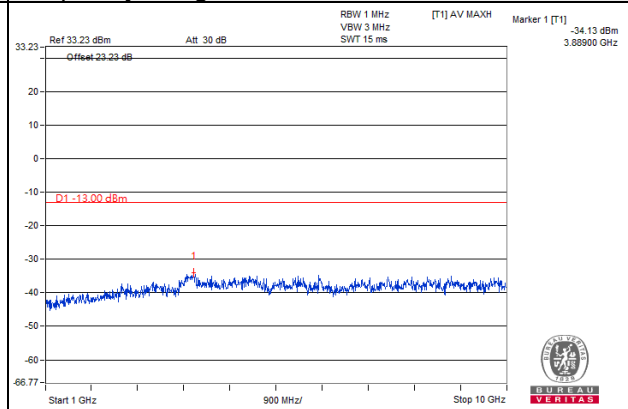


Channel 23095

Frequency Range : 9kHz~1GHz

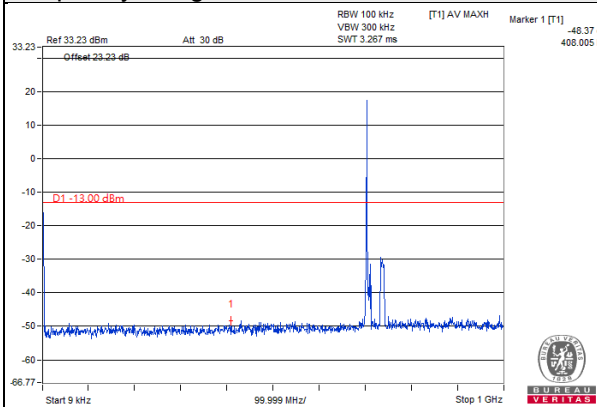


Frequency Range : 1GHz~10GHz

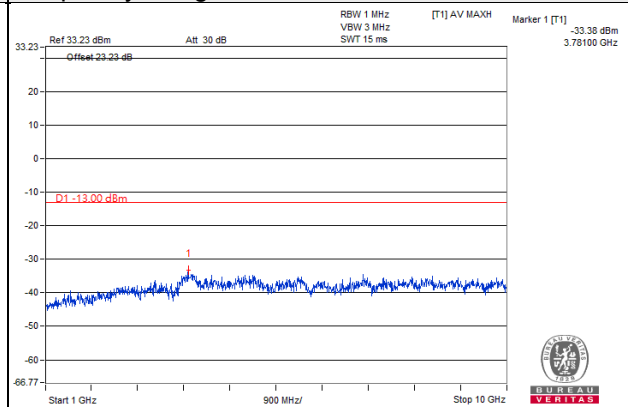


Channel 23130

Frequency Range : 9kHz~1GHz

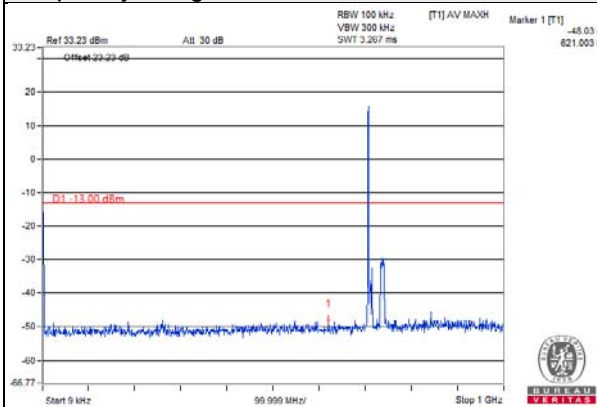

Frequency Range : 1GHz~10GHz

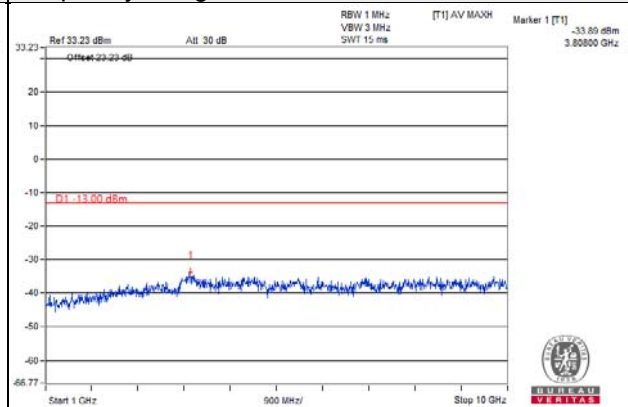

Note: The signal of 9kHz is IF signal from test instrument.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

According to FCC 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(h) AWS emission limits— General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

4.8.2 Test Procedure

- a. The field strength was measured with Spectrum Analyzer.
- b. Measurement in the semi-anechoic chamber, EUT placed on the 0.8m/1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor.
- c. Perform a field strength measurement and then mathematically convert the measured field strength level to EIRP level.
- d. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Read Value (dBμV/m) - Correction Factor @ 3m
- e. Correction Factor (dB) @ 3m = $20\log(D) - 104.8$; where D is the measurement distance @3m = -95.26dB


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Frequency Range below 1GHz>

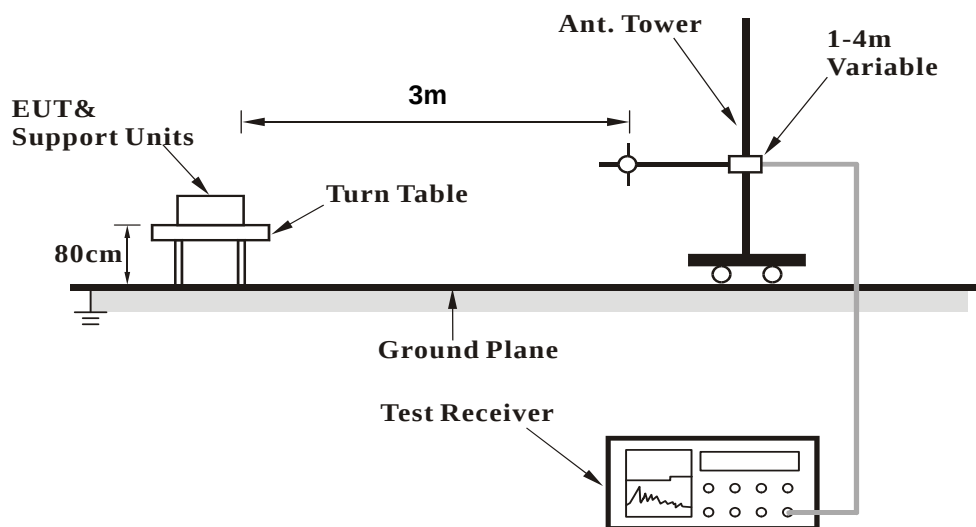

<Frequency Range above 1GHz>

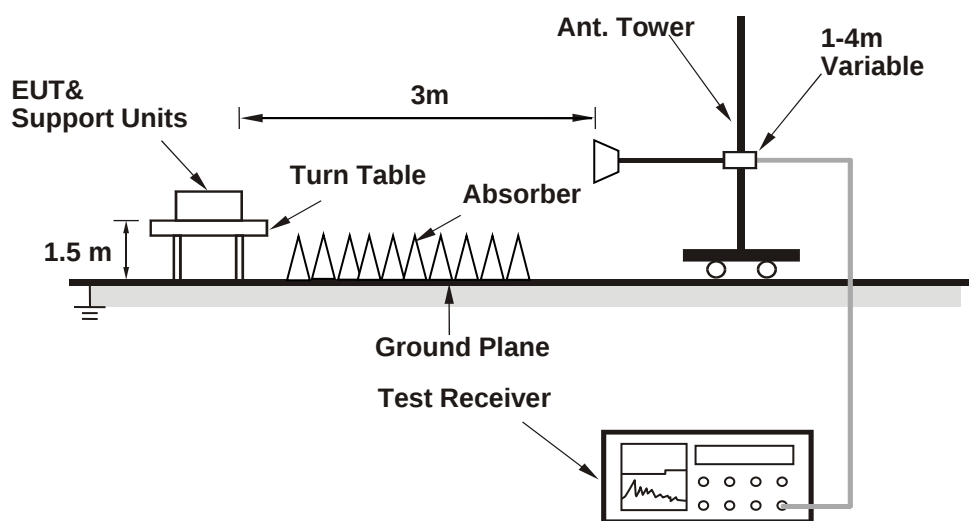

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz

LTE Band 4: 1.4MHz

Mode	TX channel 19957	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.56	31.1	-95.26	-64.16	-13	-51.16
2	126.67	24.9	-95.26	-70.36	-13	-57.36
3	167.99	25.19	-95.26	-70.07	-13	-57.07
4	207.62	27.29	-95.26	-67.97	-13	-54.97
5	315.58	25.66	-95.26	-69.60	-13	-56.60
6	447.24	29.53	-95.26	-65.73	-13	-52.73
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.68	32.48	-95.26	-62.78	-13	-49.78
2	58.49	30.03	-95.26	-65.23	-13	-52.23
3	146.59	25.37	-95.26	-69.89	-13	-56.89
4	186.24	26.31	-95.26	-68.95	-13	-55.95
5	237.44	23.29	-95.26	-71.97	-13	-58.97
6	400.45	26.82	-95.26	-68.44	-13	-55.44

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.72	31.01	-95.26	-64.25	-13	-51.25
2	126.65	25.01	-95.26	-70.25	-13	-57.25
3	167.8	25.21	-95.26	-70.05	-13	-57.05
4	207.75	27.27	-95.26	-67.99	-13	-54.99
5	315.73	25.51	-95.26	-69.75	-13	-56.75
6	447.34	29.51	-95.26	-65.75	-13	-52.75

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.75	32.29	-95.26	-62.97	-13	-49.97
2	58.48	30.11	-95.26	-65.15	-13	-52.15
3	146.6	25.46	-95.26	-69.80	-13	-56.80
4	186.11	26.19	-95.26	-69.07	-13	-56.07
5	237.45	23.4	-95.26	-71.86	-13	-58.86
6	400.28	26.85	-95.26	-68.41	-13	-55.41

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20393	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.65	30.88	-95.26	-64.38	-13	-51.38
2	126.71	25	-95.26	-70.26	-13	-57.26
3	167.89	25.06	-95.26	-70.20	-13	-57.20
4	207.67	27.25	-95.26	-68.01	-13	-55.01
5	315.74	25.59	-95.26	-69.67	-13	-56.67
6	447.29	29.45	-95.26	-65.81	-13	-52.81

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.91	32.45	-95.26	-62.81	-13	-49.81
2	58.53	30.07	-95.26	-65.19	-13	-52.19
3	146.77	25.53	-95.26	-69.73	-13	-56.73
4	186.29	26.29	-95.26	-68.97	-13	-55.97
5	237.46	23.2	-95.26	-72.06	-13	-59.06
6	400.51	26.97	-95.26	-68.29	-13	-55.29

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 4: 3MHz

Mode	TX channel 19965	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.58	30.91	-95.26	-64.35	-13	-51.35
2	126.69	25.88	-95.26	-69.38	-13	-56.38
3	167.9	25.71	-95.26	-69.55	-13	-56.55
4	207.81	27.58	-95.26	-67.68	-13	-54.68
5	315.55	25.89	-95.26	-69.37	-13	-56.37
6	447.65	30.5	-95.26	-64.76	-13	-51.76
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.77	32.27	-95.26	-62.99	-13	-49.99
2	58.37	30.23	-95.26	-65.03	-13	-52.03
3	146.65	25.37	-95.26	-69.89	-13	-56.89
4	186.21	26.38	-95.26	-68.88	-13	-55.88
5	237.36	23.37	-95.26	-71.89	-13	-58.89
6	400.42	26.94	-95.26	-68.32	-13	-55.32

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.74	31.12	-95.26	-64.14	-13	-51.14
2	126.8	25.7	-95.26	-69.56	-13	-56.56
3	167.81	25.67	-95.26	-69.59	-13	-56.59
4	207.67	27.41	-95.26	-67.85	-13	-54.85
5	315.54	25.75	-95.26	-69.51	-13	-56.51
6	448.59	30.45	-95.26	-64.81	-13	-51.81

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.85	32.31	-95.26	-62.95	-13	-49.95
2	58.59	30.06	-95.26	-65.20	-13	-52.20
3	146.75	25.38	-95.26	-69.88	-13	-56.88
4	186.27	26.29	-95.26	-68.97	-13	-55.97
5	237.44	23.44	-95.26	-71.82	-13	-58.82
6	400.49	26.82	-95.26	-68.44	-13	-55.44

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20385	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.6	31.1	-95.26	-64.16	-13	-51.16
2	126.76	25.78	-95.26	-69.48	-13	-56.48
3	167.9	25.56	-95.26	-69.70	-13	-56.70
4	207.61	27.43	-95.26	-67.83	-13	-54.83
5	315.55	25.78	-95.26	-69.48	-13	-56.48
6	448.63	30.55	-95.26	-64.71	-13	-51.71

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.79	32.49	-95.26	-62.77	-13	-49.77
2	58.47	30.22	-95.26	-65.04	-13	-52.04
3	146.61	25.42	-95.26	-69.84	-13	-56.84
4	186.21	26.19	-95.26	-69.07	-13	-56.07
5	237.51	23.44	-95.26	-71.82	-13	-58.82
6	400.28	26.8	-95.26	-68.46	-13	-55.46

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 4: 5MHz

Mode	TX channel 19975	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.72	31.03	-95.26	-64.23	-13	-51.23
2	126.72	25.76	-95.26	-69.50	-13	-56.50
3	167.81	25.64	-95.26	-69.62	-13	-56.62
4	207.83	27.42	-95.26	-67.84	-13	-54.84
5	315.69	25.7	-95.26	-69.56	-13	-56.56
6	448.2	30.56	-95.26	-64.70	-13	-51.70
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.67	32.28	-95.26	-62.98	-13	-49.98
2	58.47	30.21	-95.26	-65.05	-13	-52.05
3	146.68	25.49	-95.26	-69.77	-13	-56.77
4	186.16	26.19	-95.26	-69.07	-13	-56.07
5	237.56	23.26	-95.26	-72.00	-13	-59.00
6	400.32	26.76	-95.26	-68.50	-13	-55.50

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.51	31.11	-95.26	-64.15	-13	-51.15
2	126.75	25.88	-95.26	-69.38	-13	-56.38
3	167.82	25.55	-95.26	-69.71	-13	-56.71
4	207.8	27.59	-95.26	-67.67	-13	-54.67
5	315.52	25.91	-95.26	-69.35	-13	-56.35
6	448.39	30.6	-95.26	-64.66	-13	-51.66

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.87	32.48	-95.26	-62.78	-13	-49.78
2	58.52	30.06	-95.26	-65.20	-13	-52.20
3	146.6	25.49	-95.26	-69.77	-13	-56.77
4	186.29	26.31	-95.26	-68.95	-13	-55.95
5	237.52	23.31	-95.26	-71.95	-13	-58.95
6	400.51	26.97	-95.26	-68.29	-13	-55.29

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20375	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.64	31.02	-95.26	-64.24	-13	-51.24
2	126.7	25.71	-95.26	-69.55	-13	-56.55
3	168.01	25.62	-95.26	-69.64	-13	-56.64
4	207.63	27.52	-95.26	-67.74	-13	-54.74
5	315.62	25.82	-95.26	-69.44	-13	-56.44
6	448.21	30.59	-95.26	-64.67	-13	-51.67

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.84	32.49	-95.26	-62.77	-13	-49.77
2	58.59	30.23	-95.26	-65.03	-13	-52.03
3	146.66	25.51	-95.26	-69.75	-13	-56.75
4	186.22	26.4	-95.26	-68.86	-13	-55.86
5	237.55	23.43	-95.26	-71.83	-13	-58.83
6	400.39	26.97	-95.26	-68.29	-13	-55.29

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 4: 10MHz

Mode	TX channel 20000	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.59	31	-95.26	-64.26	-13	-51.26
2	126.77	25.71	-95.26	-69.55	-13	-56.55
3	167.97	25.64	-95.26	-69.62	-13	-56.62
4	207.85	27.55	-95.26	-67.71	-13	-54.71
5	315.65	25.9	-95.26	-69.36	-13	-56.36
6	448.22	30.56	-95.26	-64.70	-13	-51.70
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.81	32.44	-95.26	-62.82	-13	-49.82
2	58.43	30.25	-95.26	-65.01	-13	-52.01
3	146.78	25.48	-95.26	-69.78	-13	-56.78
4	186.12	26.32	-95.26	-68.94	-13	-55.94
5	237.39	23.3	-95.26	-71.96	-13	-58.96
6	400.41	26.82	-95.26	-68.44	-13	-55.44

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.56	30.96	-95.26	-64.30	-13	-51.30
2	126.61	25.78	-95.26	-69.48	-13	-56.48
3	167.83	25.69	-95.26	-69.57	-13	-56.57
4	207.66	27.47	-95.26	-67.79	-13	-54.79
5	315.59	25.69	-95.26	-69.57	-13	-56.57
6	448.3	30.46	-95.26	-64.80	-13	-51.80

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.71	32.33	-95.26	-62.93	-13	-49.93
2	58.48	30.17	-95.26	-65.09	-13	-52.09
3	146.62	25.48	-95.26	-69.78	-13	-56.78
4	186.29	26.23	-95.26	-69.03	-13	-56.03
5	237.39	23.36	-95.26	-71.90	-13	-58.90
6	400.5	26.86	-95.26	-68.40	-13	-55.40

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20350	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.66	31.13	-95.26	-64.13	-13	-51.13
2	126.7	25.72	-95.26	-69.54	-13	-56.54
3	167.82	25.53	-95.26	-69.73	-13	-56.73
4	207.85	27.43	-95.26	-67.83	-13	-54.83
5	315.51	25.85	-95.26	-69.41	-13	-56.41
6	448.23	30.42	-95.26	-64.84	-13	-51.84
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.72	32.29	-95.26	-62.97	-13	-49.97
2	58.41	30.24	-95.26	-65.02	-13	-52.02
3	146.62	25.49	-95.26	-69.77	-13	-56.77
4	186.1	26.22	-95.26	-69.04	-13	-56.04
5	237.48	23.29	-95.26	-71.97	-13	-58.97
6	400.44	26.83	-95.26	-68.43	-13	-55.43

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 4: 15MHz

Mode	TX channel 20025	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.52	30.99	-95.26	-64.27	-13	-51.27
2	126.71	25.64	-95.26	-69.62	-13	-56.62
3	168.03	25.63	-95.26	-69.63	-13	-56.63
4	207.78	27.58	-95.26	-67.68	-13	-54.68
5	315.69	25.71	-95.26	-69.55	-13	-56.55
6	448.43	30.46	-95.26	-64.80	-13	-51.80
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.78	32.29	-95.26	-62.97	-13	-49.97
2	58.49	30.14	-95.26	-65.12	-13	-52.12
3	146.61	25.52	-95.26	-69.74	-13	-56.74
4	186.22	26.24	-95.26	-69.02	-13	-56.02
5	237.51	23.4	-95.26	-71.86	-13	-58.86
6	400.46	26.83	-95.26	-68.43	-13	-55.43

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.63	31.1	-95.26	-64.16	-13	-51.16
2	126.64	25.71	-95.26	-69.55	-13	-56.55
3	167.89	25.54	-95.26	-69.72	-13	-56.72
4	207.64	27.49	-95.26	-67.77	-13	-54.77
5	315.73	25.88	-95.26	-69.38	-13	-56.38
6	448.23	30.63	-95.26	-64.63	-13	-51.63
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.85	32.49	-95.26	-62.77	-13	-49.77
2	58.37	30.05	-95.26	-65.21	-13	-52.21
3	146.76	25.54	-95.26	-69.72	-13	-56.72
4	186.28	26.26	-95.26	-69.00	-13	-56.00
5	237.5	23.34	-95.26	-71.92	-13	-58.92
6	401.05	26.91	-95.26	-68.35	-13	-55.35

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20325	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.52	30.98	-95.26	-64.28	-13	-51.28
2	126.62	25.8	-95.26	-69.46	-13	-56.46
3	167.93	25.53	-95.26	-69.73	-13	-56.73
4	207.7	27.43	-95.26	-67.83	-13	-54.83
5	315.68	25.75	-95.26	-69.51	-13	-56.51
6	448.2	30.44	-95.26	-64.82	-13	-51.82

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.74	32.38	-95.26	-62.88	-13	-49.88
2	58.53	30.04	-95.26	-65.22	-13	-52.22
3	146.57	25.51	-95.26	-69.75	-13	-56.75
4	186.11	26.36	-95.26	-68.90	-13	-55.90
5	237.45	23.32	-95.26	-71.94	-13	-58.94
6	401.14	26.92	-95.26	-68.34	-13	-55.34

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 4: 20MHz

Mode	TX channel 20050	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.7	31.12	-95.26	-64.14	-13	-51.14
2	126.64	25.68	-95.26	-69.58	-13	-56.58
3	167.87	25.59	-95.26	-69.67	-13	-56.67
4	207.75	27.6	-95.26	-67.66	-13	-54.66
5	315.71	25.9	-95.26	-69.36	-13	-56.36
6	448.33	30.54	-95.26	-64.72	-13	-51.72
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.87	32.3	-95.26	-62.96	-13	-49.96
2	58.51	30.27	-95.26	-64.99	-13	-51.99
3	146.75	25.31	-95.26	-69.95	-13	-56.95
4	186.24	26.17	-95.26	-69.09	-13	-56.09
5	238.01	23.29	-95.26	-71.97	-13	-58.97
6	400.97	26.85	-95.26	-68.41	-13	-55.41

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.51	31.13	-95.26	-64.13	-13	-51.13
2	126.81	25.76	-95.26	-69.50	-13	-56.50
3	167.92	25.53	-95.26	-69.73	-13	-56.73
4	207.83	27.65	-95.26	-67.61	-13	-54.61
5	315.62	25.7	-95.26	-69.56	-13	-56.56
6	448.26	30.48	-95.26	-64.78	-13	-51.78

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.66	32.3	-95.26	-62.96	-13	-49.96
2	58.6	30.14	-95.26	-65.12	-13	-52.12
3	146.6	25.38	-95.26	-69.88	-13	-56.88
4	186.23	26.31	-95.26	-68.95	-13	-55.95
5	237.98	23.27	-95.26	-71.99	-13	-58.99
6	400.96	26.95	-95.26	-68.31	-13	-55.31

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20300	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.64	30.94	-95.26	-64.32	-13	-51.32
2	126.76	25.82	-95.26	-69.44	-13	-56.44
3	167.81	25.7	-95.26	-69.56	-13	-56.56
4	207.76	27.57	-95.26	-67.69	-13	-54.69
5	315.54	25.72	-95.26	-69.54	-13	-56.54
6	448.37	30.64	-95.26	-64.62	-13	-51.62

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.66	32.48	-95.26	-62.78	-13	-49.78
2	58.36	30.1	-95.26	-65.16	-13	-52.16
3	146.68	25.39	-95.26	-69.87	-13	-56.87
4	186.17	26.26	-95.26	-69.00	-13	-56.00
5	237.82	23.28	-95.26	-71.98	-13	-58.98
6	400.97	26.99	-95.26	-68.27	-13	-55.27

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 12: 1.4MHz

Mode	TX channel 23017	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.61	29.69	-95.26	-65.57	-13	-52.57
2	119.26	24.61	-95.26	-70.65	-13	-57.65
3	154.39	24.67	-95.26	-70.59	-13	-57.59
4	207.78	26.76	-95.26	-68.50	-13	-55.50
5	335.94	24.69	-95.26	-70.57	-13	-57.57
6	458.13	28.98	-95.26	-66.28	-13	-53.28
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.73	31.62	-95.26	-63.64	-13	-50.64
2	68.91	29.5	-95.26	-65.76	-13	-52.76
3	136.31	24.6	-95.26	-70.66	-13	-57.66
4	160.19	26.29	-95.26	-68.97	-13	-55.97
5	237.35	22.57	-95.26	-72.69	-13	-59.69
6	397	26.48	-95.26	-68.78	-13	-55.78

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23095	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.54	29.72	-95.26	-65.54	-13	-52.54
2	119.35	24.81	-95.26	-70.45	-13	-57.45
3	154.53	24.64	-95.26	-70.62	-13	-57.62
4	207.62	26.6	-95.26	-68.66	-13	-55.66
5	335.86	24.75	-95.26	-70.51	-13	-57.51
6	458.11	28.8	-95.26	-66.46	-13	-53.46

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.87	31.7	-95.26	-63.56	-13	-50.56
2	69.04	29.37	-95.26	-65.89	-13	-52.89
3	136.22	24.74	-95.26	-70.52	-13	-57.52
4	160.15	26.3	-95.26	-68.96	-13	-55.96
5	237.23	22.52	-95.26	-72.74	-13	-59.74
6	396.84	26.67	-95.26	-68.59	-13	-55.59

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23173	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.47	29.83	-95.26	-65.43	-13	-52.43
2	119.23	24.7	-95.26	-70.56	-13	-57.56
3	154.52	24.74	-95.26	-70.52	-13	-57.52
4	207.85	26.61	-95.26	-68.65	-13	-55.65
5	335.82	24.88	-95.26	-70.38	-13	-57.38
6	458.25	28.86	-95.26	-66.40	-13	-53.40

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.65	31.57	-95.26	-63.69	-13	-50.69
2	69.09	29.34	-95.26	-65.92	-13	-52.92
3	136.32	24.71	-95.26	-70.55	-13	-57.55
4	160.22	26.23	-95.26	-69.03	-13	-56.03
5	237.28	22.46	-95.26	-72.80	-13	-59.80
6	396.88	26.67	-95.26	-68.59	-13	-55.59

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 12: 3MHz

Mode	TX channel 23025	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.7	29.93	-95.26	-65.33	-13	-52.33
2	119.34	24.73	-95.26	-70.53	-13	-57.53
3	154.44	24.65	-95.26	-70.61	-13	-57.61
4	207.62	26.68	-95.26	-68.58	-13	-55.58
5	335.78	24.9	-95.26	-70.36	-13	-57.36
6	458.18	28.86	-95.26	-66.40	-13	-53.40
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.69	31.52	-95.26	-63.74	-13	-50.74
2	69.12	29.43	-95.26	-65.83	-13	-52.83
3	136.2	24.57	-95.26	-70.69	-13	-57.69
4	160.09	26.23	-95.26	-69.03	-13	-56.03
5	237.36	22.55	-95.26	-72.71	-13	-59.71
6	396.93	26.7	-95.26	-68.56	-13	-55.56

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23095	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.53	29.72	-95.26	-65.54	-13	-52.54
2	119.29	24.7	-95.26	-70.56	-13	-57.56
3	154.54	24.6	-95.26	-70.66	-13	-57.66
4	207.83	26.75	-95.26	-68.51	-13	-55.51
5	335.87	24.82	-95.26	-70.44	-13	-57.44
6	458.18	28.86	-95.26	-66.40	-13	-53.40

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.79	31.6	-95.26	-63.66	-13	-50.66
2	69.11	29.35	-95.26	-65.91	-13	-52.91
3	136.22	24.7	-95.26	-70.56	-13	-57.56
4	160.02	26.24	-95.26	-69.02	-13	-56.02
5	237.26	22.39	-95.26	-72.87	-13	-59.87
6	397.02	26.62	-95.26	-68.64	-13	-55.64

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23165	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.63	29.89	-95.26	-65.37	-13	-52.37
2	119.32	24.67	-95.26	-70.59	-13	-57.59
3	154.33	24.7	-95.26	-70.56	-13	-57.56
4	207.83	26.75	-95.26	-68.51	-13	-55.51
5	335.83	24.89	-95.26	-70.37	-13	-57.37
6	458.3	28.84	-95.26	-66.42	-13	-53.42

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.81	31.58	-95.26	-63.68	-13	-50.68
2	69.13	29.43	-95.26	-65.83	-13	-52.83
3	136.33	24.71	-95.26	-70.55	-13	-57.55
4	160.13	26.24	-95.26	-69.02	-13	-56.02
5	237.37	22.57	-95.26	-72.69	-13	-59.69
6	396.88	26.66	-95.26	-68.60	-13	-55.60

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 12: 5MHz

Mode	TX channel 23035	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.63	29.85	-95.26	-65.41	-13	-52.41
2	119.26	24.68	-95.26	-70.58	-13	-57.58
3	154.33	24.6	-95.26	-70.66	-13	-57.66
4	207.75	26.81	-95.26	-68.45	-13	-55.45
5	335.92	24.84	-95.26	-70.42	-13	-57.42
6	458.24	28.77	-95.26	-66.49	-13	-53.49
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.76	31.69	-95.26	-63.57	-13	-50.57
2	69.03	29.46	-95.26	-65.80	-13	-52.80
3	136.16	24.75	-95.26	-70.51	-13	-57.51
4	160.23	26.37	-95.26	-68.89	-13	-55.89
5	237.26	22.43	-95.26	-72.83	-13	-59.83
6	396.85	26.46	-95.26	-68.80	-13	-55.80

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23095	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.67	29.82	-95.26	-65.44	-13	-52.44
2	119.32	24.66	-95.26	-70.60	-13	-57.60
3	154.53	24.69	-95.26	-70.57	-13	-57.57
4	207.8	26.75	-95.26	-68.51	-13	-55.51
5	335.92	24.81	-95.26	-70.45	-13	-57.45
6	458.12	28.79	-95.26	-66.47	-13	-53.47

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.81	31.66	-95.26	-63.60	-13	-50.60
2	69.1	29.29	-95.26	-65.97	-13	-52.97
3	136.14	24.71	-95.26	-70.55	-13	-57.55
4	160.06	26.22	-95.26	-69.04	-13	-56.04
5	237.22	22.43	-95.26	-72.83	-13	-59.83
6	396.83	26.47	-95.26	-68.79	-13	-55.79

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23155	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.5	29.73	-95.26	-65.53	-13	-52.53
2	119.13	24.67	-95.26	-70.59	-13	-57.59
3	154.45	24.56	-95.26	-70.70	-13	-57.70
4	207.72	26.77	-95.26	-68.49	-13	-55.49
5	335.93	24.81	-95.26	-70.45	-13	-57.45
6	458.27	28.9	-95.26	-66.36	-13	-53.36

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.67	31.48	-95.26	-63.78	-13	-50.78
2	68.98	29.45	-95.26	-65.81	-13	-52.81
3	136.31	24.75	-95.26	-70.51	-13	-57.51
4	160.19	26.2	-95.26	-69.06	-13	-56.06
5	237.36	22.55	-95.26	-72.71	-13	-59.71
6	396.84	26.63	-95.26	-68.63	-13	-55.63

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 12: 10MHz

Mode	TX channel 23060	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.69	29.81	-95.26	-65.45	-13	-52.45
2	119.18	24.73	-95.26	-70.53	-13	-57.53
3	154.54	24.7	-95.26	-70.56	-13	-57.56
4	207.8	26.82	-95.26	-68.44	-13	-55.44
5	335.72	24.69	-95.26	-70.57	-13	-57.57
6	458.1	28.87	-95.26	-66.39	-13	-53.39
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.77	31.69	-95.26	-63.57	-13	-50.57
2	68.91	29.3	-95.26	-65.96	-13	-52.96
3	136.33	24.6	-95.26	-70.66	-13	-57.66
4	160.04	26.18	-95.26	-69.08	-13	-56.08
5	237.41	22.4	-95.26	-72.86	-13	-59.86
6	396.93	26.5	-95.26	-68.76	-13	-55.76

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23095	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.49	29.89	-95.26	-65.37	-13	-52.37
2	119.13	24.78	-95.26	-70.48	-13	-57.48
3	154.33	24.6	-95.26	-70.66	-13	-57.66
4	207.79	26.77	-95.26	-68.49	-13	-55.49
5	335.8	24.88	-95.26	-70.38	-13	-57.38
6	458.13	28.91	-95.26	-66.35	-13	-53.35
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.8	31.63	-95.26	-63.63	-13	-50.63
2	69.1	29.37	-95.26	-65.89	-13	-52.89
3	136.12	24.75	-95.26	-70.51	-13	-57.51
4	160.13	26.2	-95.26	-69.06	-13	-56.06
5	237.39	22.62	-95.26	-72.64	-13	-59.64
6	396.93	26.47	-95.26	-68.79	-13	-55.79

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23130	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.53	29.89	-95.26	-65.37	-13	-52.37
2	119.24	24.78	-95.26	-70.48	-13	-57.48
3	154.4	24.74	-95.26	-70.52	-13	-57.52
4	207.75	26.72	-95.26	-68.54	-13	-55.54
5	335.89	24.87	-95.26	-70.39	-13	-57.39
6	458.11	28.98	-95.26	-66.28	-13	-53.28

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	30.82	31.49	-95.26	-63.77	-13	-50.77
2	69.12	29.42	-95.26	-65.84	-13	-52.84
3	136.15	24.64	-95.26	-70.62	-13	-57.62
4	160.11	26.19	-95.26	-69.07	-13	-56.07
5	237.21	22.44	-95.26	-72.82	-13	-59.82
6	397	26.66	-95.26	-68.60	-13	-55.60

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

ABOVE 1GHz

LTE Band 4: 1.4MHz

Mode	TX channel 19957	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3421.4	32.66	-95.26	-62.60	-13	-49.60
2	5132.1	32.96	-95.26	-62.30	-13	-49.30
3	6842.8	33.14	-95.26	-62.12	-13	-49.12
4	8553.5	33.77	-95.26	-61.49	-13	-48.49
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3421.4	32.66	-95.26	-62.60	-13	-49.60
2	5132.1	33.22	-95.26	-62.04	-13	-49.04
3	6842.8	33.52	-95.26	-61.74	-13	-48.74
4	8553.5	34.1	-95.26	-61.16	-13	-48.16

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.59	-95.26	-62.67	-13	-49.67
2	5197.5	32.95	-95.26	-62.31	-13	-49.31
3	6930	33.3	-95.26	-61.96	-13	-48.96
4	8662.5	33.7	-95.26	-61.56	-13	-48.56

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.81	-95.26	-62.45	-13	-49.45
2	5197.5	33.14	-95.26	-62.12	-13	-49.12
3	6930	33.6	-95.26	-61.66	-13	-48.66
4	8662.5	33.99	-95.26	-61.27	-13	-48.27

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

Mode	TX channel 20393	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3508.6	32.73	-95.26	-62.53	-13	-49.53
2	5262.9	32.92	-95.26	-62.34	-13	-49.34
3	7017.2	33.09	-95.26	-62.17	-13	-49.17
4	8771.5	33.69	-95.26	-61.57	-13	-48.57
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3508.6	32.88	-95.26	-62.38	-13	-49.38
2	5262.9	33.18	-95.26	-62.08	-13	-49.08
3	7017.2	33.48	-95.26	-61.78	-13	-48.78
4	8771.5	34.17	-95.26	-61.09	-13	-48.09

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

LTE Band 4: 3MHz

Mode	TX channel 19965	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3423	32.62	-95.26	-62.64	-13	-49.64
2	5134.5	33	-95.26	-62.26	-13	-49.26
3	6846	33.24	-95.26	-62.02	-13	-49.02
4	8557.5	33.77	-95.26	-61.49	-13	-48.49
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3423	32.7	-95.26	-62.56	-13	-49.56
2	5134.5	33.15	-95.26	-62.11	-13	-49.11
3	6846	33.67	-95.26	-61.59	-13	-48.59
4	8557.5	33.95	-95.26	-61.31	-13	-48.31

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.75	-95.26	-62.51	-13	-49.51
2	5197.5	32.91	-95.26	-62.35	-13	-49.35
3	6930	33.27	-95.26	-61.99	-13	-48.99
4	8662.5	33.83	-95.26	-61.43	-13	-48.43
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.65	-95.26	-62.61	-13	-49.61
2	5197.5	33.24	-95.26	-62.02	-13	-49.02
3	6930	33.61	-95.26	-61.65	-13	-48.65
4	8662.5	33.98	-95.26	-61.28	-13	-48.28

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20385	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3507	32.7	-95.26	-62.56	-13	-49.56
2	5260.5	32.86	-95.26	-62.40	-13	-49.40
3	7014	33.09	-95.26	-62.17	-13	-49.17
4	8767.5	33.64	-95.26	-61.62	-13	-48.62
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3507	32.75	-95.26	-62.51	-13	-49.51
2	5260.5	33.34	-95.26	-61.92	-13	-48.92
3	7014	33.54	-95.26	-61.72	-13	-48.72
4	8767.5	33.96	-95.26	-61.30	-13	-48.30

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

LTE Band 4: 5MHz

Mode	TX channel 19975	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3425	32.61	-95.26	-62.65	-13	-49.65
2	5137.5	32.89	-95.26	-62.37	-13	-49.37
3	6850	33.16	-95.26	-62.10	-13	-49.10
4	8562.5	33.85	-95.26	-61.41	-13	-48.41
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3425	32.85	-95.26	-62.41	-13	-49.41
2	5137.5	33.26	-95.26	-62.00	-13	-49.00
3	6850	33.71	-95.26	-61.55	-13	-48.55
4	8562.5	34.16	-95.26	-61.10	-13	-48.10

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.72	-95.26	-62.54	-13	-49.54
2	5197.5	33.04	-95.26	-62.22	-13	-49.22
3	6930	33.1	-95.26	-62.16	-13	-49.16
4	8662.5	33.64	-95.26	-61.62	-13	-48.62

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.65	-95.26	-62.61	-13	-49.61
2	5197.5	33.34	-95.26	-61.92	-13	-48.92
3	6930	33.6	-95.26	-61.66	-13	-48.66
4	8662.5	34.18	-95.26	-61.08	-13	-48.08

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

Mode	TX channel 20375	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3505	32.72	-95.26	-62.54	-13	-49.54
2	5257.5	32.88	-95.26	-62.38	-13	-49.38
3	7010	33.31	-95.26	-61.95	-13	-48.95
4	8762.5	33.66	-95.26	-61.60	-13	-48.60
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3505	32.76	-95.26	-62.50	-13	-49.50
2	5257.5	33.3	-95.26	-61.96	-13	-48.96
3	7010	33.53	-95.26	-61.73	-13	-48.73
4	8762.5	34.15	-95.26	-61.11	-13	-48.11

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 4: 10MHz

Mode	TX channel 20000	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3430	32.66	-95.26	-62.60	-13	-49.60
2	5145	32.91	-95.26	-62.35	-13	-49.35
3	6860	33.12	-95.26	-62.14	-13	-49.14
4	8575	33.69	-95.26	-61.57	-13	-48.57
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3430	32.75	-95.26	-62.51	-13	-49.51
2	5145	33.25	-95.26	-62.01	-13	-49.01
3	6860	33.61	-95.26	-61.65	-13	-48.65
4	8575	34.04	-95.26	-61.22	-13	-48.22

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.72	-95.26	-62.54	-13	-49.54
2	5197.5	32.84	-95.26	-62.42	-13	-49.42
3	6930	33.22	-95.26	-62.04	-13	-49.04
4	8662.5	33.71	-95.26	-61.55	-13	-48.55

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.79	-95.26	-62.47	-13	-49.47
2	5197.5	33.19	-95.26	-62.07	-13	-49.07
3	6930	33.61	-95.26	-61.65	-13	-48.65
4	8662.5	33.96	-95.26	-61.30	-13	-48.30

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

Mode	TX channel 20350	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3500	32.83	-95.26	-62.43	-13	-49.43
2	5250	33.04	-95.26	-62.22	-13	-49.22
3	7000	33.13	-95.26	-62.13	-13	-49.13
4	8750	33.85	-95.26	-61.41	-13	-48.41

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3500	32.82	-95.26	-62.44	-13	-49.44
2	5250	33.14	-95.26	-62.12	-13	-49.12
3	7000	33.5	-95.26	-61.76	-13	-48.76
4	8750	34.03	-95.26	-61.23	-13	-48.23

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

LTE Band 4: 15MHz

Mode	TX channel 20025	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3435	32.62	-95.26	-62.64	-13	-49.64
2	5152.5	32.82	-95.26	-62.44	-13	-49.44
3	6870	33.15	-95.26	-62.11	-13	-49.11
4	8587.5	33.65	-95.26	-61.61	-13	-48.61
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3435	32.83	-95.26	-62.43	-13	-49.43
2	5152.5	33.17	-95.26	-62.09	-13	-49.09
3	6870	33.65	-95.26	-61.61	-13	-48.61
4	8587.5	34.03	-95.26	-61.23	-13	-48.23

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.63	-95.26	-62.63	-13	-49.63
2	5197.5	33.01	-95.26	-62.25	-13	-49.25
3	6930	33.13	-95.26	-62.13	-13	-49.13
4	8662.5	33.83	-95.26	-61.43	-13	-48.43

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.8	-95.26	-62.46	-13	-49.46
2	5197.5	33.12	-95.26	-62.14	-13	-49.14
3	6930	33.53	-95.26	-61.73	-13	-48.73
4	8662.5	34.05	-95.26	-61.21	-13	-48.21

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20325	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3495	32.81	-95.26	-62.45	-13	-49.45
2	5242.5	32.94	-95.26	-62.32	-13	-49.32
3	6990	33.11	-95.26	-62.15	-13	-49.15
4	8737.5	33.63	-95.26	-61.63	-13	-48.63

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3495	32.66	-95.26	-62.60	-13	-49.60
2	5242.5	33.17	-95.26	-62.09	-13	-49.09
3	6990	33.67	-95.26	-61.59	-13	-48.59
4	8737.5	34	-95.26	-61.26	-13	-48.26

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 4: 20MHz

Mode	TX channel 20050	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3440	32.61	-95.26	-62.65	-13	-49.65
2	5160	32.95	-95.26	-62.31	-13	-49.31
3	6880	33.17	-95.26	-62.09	-13	-49.09
4	8600	33.76	-95.26	-61.50	-13	-48.50
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3440	32.68	-95.26	-62.58	-13	-49.58
2	5160	33.22	-95.26	-62.04	-13	-49.04
3	6880	33.55	-95.26	-61.71	-13	-48.71
4	8600	34.18	-95.26	-61.08	-13	-48.08

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

Mode	TX channel 20175	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.81	-95.26	-62.45	-13	-49.45
2	5197.5	32.89	-95.26	-62.37	-13	-49.37
3	6930	33.09	-95.26	-62.17	-13	-49.17
4	8662.5	33.8	-95.26	-61.46	-13	-48.46
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3465	32.78	-95.26	-62.48	-13	-49.48
2	5197.5	33.15	-95.26	-62.11	-13	-49.11
3	6930	33.69	-95.26	-61.57	-13	-48.57
4	8662.5	33.95	-95.26	-61.31	-13	-48.31

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 20300	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3490	32.72	-95.26	-62.54	-13	-49.54
2	5235	32.97	-95.26	-62.29	-13	-49.29
3	6980	33.31	-95.26	-61.95	-13	-48.95
4	8725	33.81	-95.26	-61.45	-13	-48.45
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	3490	32.82	-95.26	-62.44	-13	-49.44
2	5235	33.18	-95.26	-62.08	-13	-49.08
3	6980	33.63	-95.26	-61.63	-13	-48.63
4	8725	33.94	-95.26	-61.32	-13	-48.32

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 12: 1.4MHz

Mode	TX channel 23017	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1399.4	31.9	-95.26	-63.36	-13	-50.36
2	2099.1	32.81	-95.26	-62.45	-13	-49.45
3	2798.8	32.64	-95.26	-62.62	-13	-49.62
4	3498.5	33.57	-95.26	-61.69	-13	-48.69
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1399.4	32.4	-95.26	-62.86	-13	-49.86
2	2099.1	32.67	-95.26	-62.59	-13	-49.59
3	2798.8	33.27	-95.26	-61.99	-13	-48.99
4	3498.5	33.58	-95.26	-61.68	-13	-48.68

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23095	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1415	32.08	-95.26	-63.18	-13	-50.18
2	2122.5	32.65	-95.26	-62.61	-13	-49.61
3	2830	32.69	-95.26	-62.57	-13	-49.57
4	3537.5	33.47	-95.26	-61.79	-13	-48.79
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1415	32.36	-95.26	-62.90	-13	-49.90
2	2122.5	32.7	-95.26	-62.56	-13	-49.56
3	2830	33.29	-95.26	-61.97	-13	-48.97
4	3537.5	33.52	-95.26	-61.74	-13	-48.74

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

Mode	TX channel 23173	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1430.6	31.91	-95.26	-63.35	-13	-50.35
2	2145.9	32.69	-95.26	-62.57	-13	-49.57
3	2861.2	32.7	-95.26	-62.56	-13	-49.56
4	3576.5	33.58	-95.26	-61.68	-13	-48.68
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1430.6	32.38	-95.26	-62.88	-13	-49.88
2	2145.9	32.87	-95.26	-62.39	-13	-49.39
3	2861.2	33.36	-95.26	-61.90	-13	-48.90
4	3576.5	33.61	-95.26	-61.65	-13	-48.65

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 12: 3MHz

Mode	TX channel 23025	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1401	32.04	-95.26	-63.22	-13	-50.22
2	2101.5	32.7	-95.26	-62.56	-13	-49.56
3	2802	32.7	-95.26	-62.56	-13	-49.56
4	3502.5	33.56	-95.26	-61.70	-13	-48.70
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1401	32.3	-95.26	-62.96	-13	-49.96
2	2101.5	32.83	-95.26	-62.43	-13	-49.43
3	2802	33.37	-95.26	-61.89	-13	-48.89
4	3502.5	33.63	-95.26	-61.63	-13	-48.63

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23095	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1415	31.92	-95.26	-63.34	-13	-50.34
2	2122.5	32.81	-95.26	-62.45	-13	-49.45
3	2830	32.73	-95.26	-62.53	-13	-49.53
4	3537.5	33.61	-95.26	-61.65	-13	-48.65
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1415	32.28	-95.26	-62.98	-13	-49.98
2	2122.5	32.78	-95.26	-62.48	-13	-49.48
3	2830	33.25	-95.26	-62.01	-13	-49.01
4	3537.5	33.56	-95.26	-61.70	-13	-48.70

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23165	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1429	31.89	-95.26	-63.37	-13	-50.37
2	2143.5	32.75	-95.26	-62.51	-13	-49.51
3	2858	32.74	-95.26	-62.52	-13	-49.52
4	3572.5	33.55	-95.26	-61.71	-13	-48.71

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1429	32.26	-95.26	-63.00	-13	-50.00
2	2143.5	32.67	-95.26	-62.59	-13	-49.59
3	2858	33.26	-95.26	-62.00	-13	-49.00
4	3572.5	33.74	-95.26	-61.52	-13	-48.52

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

LTE Band 12: 5MHz

Mode	TX channel 23035	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1403	32.02	-95.26	-63.24	-13	-50.24
2	2104.5	32.8	-95.26	-62.46	-13	-49.46
3	2806	32.78	-95.26	-62.48	-13	-49.48
4	3507.5	33.71	-95.26	-61.55	-13	-48.55
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1403	32.31	-95.26	-62.95	-13	-49.95
2	2104.5	32.76	-95.26	-62.50	-13	-49.50
3	2806	33.29	-95.26	-61.97	-13	-48.97
4	3507.5	33.62	-95.26	-61.64	-13	-48.64

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

Mode	TX channel 23095	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1415	31.92	-95.26	-63.34	-13	-50.34
2	2122.5	32.66	-95.26	-62.60	-13	-49.60
3	2830	32.67	-95.26	-62.59	-13	-49.59
4	3537.5	33.56	-95.26	-61.70	-13	-48.70
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1415	32.3	-95.26	-62.96	-13	-49.96
2	2122.5	32.84	-95.26	-62.42	-13	-49.42
3	2830	33.27	-95.26	-61.99	-13	-48.99
4	3537.5	33.63	-95.26	-61.63	-13	-48.63

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23155	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1427	31.98	-95.26	-63.28	-13	-50.28
2	2140.5	32.59	-95.26	-62.67	-13	-49.67
3	2854	32.84	-95.26	-62.42	-13	-49.42
4	3567.5	33.52	-95.26	-61.74	-13	-48.74

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1427	32.27	-95.26	-62.99	-13	-49.99
2	2140.5	32.77	-95.26	-62.49	-13	-49.49
3	2854	33.22	-95.26	-62.04	-13	-49.04
4	3567.5	33.52	-95.26	-61.74	-13	-48.74

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

LTE Band 12: 10MHz

Mode	TX channel 23060	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1408	31.96	-95.26	-63.30	-13	-50.30
2	2112	32.67	-95.26	-62.59	-13	-49.59
3	2816	32.83	-95.26	-62.43	-13	-49.43
4	3520	33.68	-95.26	-61.58	-13	-48.58
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1408	32.45	-95.26	-62.81	-13	-49.81
2	2112	32.78	-95.26	-62.48	-13	-49.48
3	2816	33.36	-95.26	-61.90	-13	-48.90
4	3520	33.51	-95.26	-61.75	-13	-48.75

Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
- Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23095	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1415	31.96	-95.26	-63.30	-13	-50.30
2	2122.5	32.69	-95.26	-62.57	-13	-49.57
3	2830	32.84	-95.26	-62.42	-13	-49.42
4	3537.5	33.49	-95.26	-61.77	-13	-48.77
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1415	32.32	-95.26	-62.94	-13	-49.94
2	2122.5	32.78	-95.26	-62.48	-13	-49.48
3	2830	33.25	-95.26	-62.01	-13	-49.01
4	3537.5	33.53	-95.26	-61.73	-13	-48.73

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = $20\log(D) - 104.8$; where D is the measurement distance @ 3m.

Mode	TX channel 23130	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1422	31.94	-95.26	-63.32	-13	-50.32
2	2133	32.59	-95.26	-62.67	-13	-49.67
3	2844	32.67	-95.26	-62.59	-13	-49.59
4	3555	33.57	-95.26	-61.69	-13	-48.69
Antenna Polarity & Test Distance: Vertical at 3 M						
No.	Freq. (MHz)	Reading (dB μ V/m)	Correction Factor (dB)	Emission (dBm)	Limit (dBm)	Margin (dB)
1	1422	32.31	-95.26	-62.95	-13	-49.95
2	2133	32.74	-95.26	-62.52	-13	-49.52
3	2844	33.41	-95.26	-61.85	-13	-48.85
4	3555	33.56	-95.26	-61.70	-13	-48.70

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB μ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @ 3m.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---