

# TEST REPORT

**Product Name** : Tablet  
**Model Number** : FLEX 12B  
**FCC ID** : O86-FLEX12B  
**IC** : 10591A-FLEX12B

**Prepared for** : MobileDemand, LC  
**Address** : 1501 Boyson Square Drive, Suite 101, Hiawatha, Iowa,  
United States

**Prepared by** : EMTEK (SHENZHEN) CO., LTD.  
**Address** : Building 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

**Report Number** : ENS2311230096W00506R  
**Date(s) of Tests** : November 23, 2023 to January 4, 2024  
**Date of Issue** : January 5, 2024

# TABLE OF CONTENTS

<b>1 TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2 EUT TECHNICAL DESCRIPTION.....</b>	<b>5</b>
<b>3 SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>4 TEST METHODOLOGY.....</b>	<b>7</b>
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
4.2 MEASUREMENT EQUIPMENT USED .....	7
4.3 DESCRIPTION OF TEST MODES .....	8
<b>5 FACILITIES AND ACCREDITATIONS.....</b>	<b>11</b>
5.1 FACILITIES.....	11
5.2 EQUIPMENT .....	11
5.3 LABORATORY ACCREDITATIONS AND LISTINGS .....	11
<b>6 TEST SYSTEM UNCERTAINTY.....</b>	<b>12</b>
<b>7 SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>13</b>
7.1 RADIO FREQUENCY TEST SETUP .....	13
7.2 RADIO FREQUENCY TEST SETUP .....	13
7.3 CONDUCTED EMISSION TEST SETUP .....	15
7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM .....	16
7.5 SUPPORT EQUIPMENT .....	16
<b>8 TEST REQUIREMENTS .....</b>	<b>17</b>
8.1 OCCUPIED BANDWIDTH .....	17
8.2 MAXIMUM CONDUCTED OUTPUT POWER .....	269
8.3 MAXIMUM POWER SPECTRAL DENSITY .....	535
8.4 IN-BAND EMISSIONS (EMISSION MASK) .....	584
8.5 CONTENTION BASED PROTOCOL .....	795
8.6 RADIATED SPURIOUS EMISSION.....	812
8.7 POWER LINE CONDUCTED EMISSIONS.....	863
8.8 ANTENNA REQUIREMENT .....	866

## Modified Information

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2311230096W00506R	/	Original Report

# 1 TEST RESULT CERTIFICATION

Applicant : MobileDemand, LC  
 Address : 1501 Boyson Square Drive, Suite 101, Hiawatha, Iowa, United States  
 Manufacturer : MobileDemand, LC  
 Address : 1501 Boyson Square Drive, Suite 101, Hiawatha, Iowa, United States  
 EUT : Tablet  
 Model Name : FLEX 12B  
 Trademark : MobileDemand

**Measurement Procedure Used:**

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	PASS
IC RSS-248 Issue 2(12-2022) IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021)	PASS

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the above table standards requirement.


The test results of this report relate only to the tested sample identified in this report.

Date of Test : November 23, 2023 to January 4, 2024

Prepared by : *Una Yu*  
 Una Yu/Editor

Reviewer : *Joe Xia*  
 Joe Xia/Supervisor

Approved & Authorized Signer : *Lisa Wang*  
 Lisa Wang/Manager



## 2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
<b>FCC Classification:</b>	15E 6GHz Low Power Indoor Client (6XD)
<b>Product:</b>	Tablet
<b>Model Number:</b>	FLEX 12B
<b>WiFi Type:</b>	UNII-5 Band: 5925 ~ 6425 MHz UNII-6 Band: 6425 ~ 6525 MHz UNII-7 Band: 6525 ~ 6875 MHz UNII-8 Band: 6875 ~ 7125 MHz
<b>WLAN Supported:</b>	802.11ax(HE20)/ax(HE40)/ax(HE80)/ax(HE160)
<b>Modulation:</b>	OFDM, OFDMA
<b>Channel Number:</b>	For 5925 ~ 6425MHz band: Channel 1 - 93 For 6425 ~ 6525MHz Band: Channel 97 - 119 For 6525 ~ 6875MHz Band: Channel 117 - 187 For 6875 ~ 7125MHz band: Channel 189 - 233
<b>TPC Function:</b>	Not Applicable
<b>Antenna Type:</b>	FPC Antenna
<b>Antenna Gain:</b>	Ant1: 0.80dBi, Ant2: 0.98dBi (Note: The antenna information is provided by the customers, which will have a certain impact on the test results.)
<b>Smart System</b>	MIMO
<b>Power Supply:</b>	DC 20V from adapter
<b>Adapter:</b>	MODEL: ES177B-US-2000325 INPUT: 100-240V~50/60Hz 1.5A OUTPUT:5V/3A , 9V/3A , 12V/3A, 15V/3A, 20V/3.25A, (PPS):3.3-20V/3.25A(65.0W MAX)
<b>Test Voltage:</b>	AC 120V/60Hz, DC 7.6V from Internal Battery
<b>Temperature Range:</b>	0°C ~ +35°C
<b>FVIN:</b>	Win11

Note1: For more details, please refer to the User's manual of the EUT.

### 3 SUMMARY OF TEST RESULTS

FCC PartClause	IC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 2.1049	RSS-248 4.4 RSS-Gen 6.7	Occupied Bandwidth 99%, 26dB Bandwidth	PASS	
15.407 (a) 2.1046	RSS-248 4.6	Maximum Conducted Output Power	PASS	
15.407 (a)	RSS-248 4.6	Maximum Power Spectral Density	PASS	
15.407 (b)	RSS-248 4.7	In-Band Emissions(Emission Mask)	PASS	
15.407 (d)	RSS-248 4.8	Contention Based Protocol	PASS	
15.407 (b) 15.209 15.205	RSS-248 4.7 RSS-Gen 8.9 RSS-Gen 8.10 RSS-Gen 6.13	Radiated Spurious Emission	PASS	
15.207	RSS-Gen 8.8	Power Line Conducted Emissions	PASS	
15.203	RSS-Gen 6.8	Antenna Requirement	PASS	

NOTE1: The results of this report do not take into account the uncertainty.  
 NOTE2: According to FCC OET KDB 789033, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.  
 NOTE3: This device support partial RU and Full RU, only the worst case of Full RU test data was recorded in this report.

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for **FCC ID: O86-FLEX12B** and **IC: 10591A-FLEX12B** filing to comply with the above table standards requirement.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart E

IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021)

IC RSS-248 Issue 2(12-2022)

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 789033 D2 General UNII Test Procedures New Rules v02r01

FCC KDB 987594 D01 U-NII 6GHz General Requirements v01r03

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01

### 4.2 MEASUREMENT EQUIPMENT USED

#### For Conducted Emission Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101384	2023/5/13	1Year
AMN	Rohde & Schwarz	ENV216	101161	2023/5/13	1Year

#### For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	2023/5/13	1Year
Pre-Amplifie	Lunar EM	LNA30M3G-25	J1010000007 0	2023/5/13	1Year
Bilog Antenna	Schwarzbeck	VULB9163	660	2023/5/16	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	2023/5/12	2 Year
Pre-Amplifie	SKET	LNPA_0118G-45	SK20190518 01	2023/5/10	1Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2023/5/12	2 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2023/5/10	1Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2023/5/12	2 Year
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2 400-2485MHZ)	2	2023/5/13	1 Year

#### For Other Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wideband Radio Communication Tester	R&S	CMW500	171168	2023/9/14	1Year
Frequency Extender	R&S	CMW-Z800A	100430	2023/11/2	1Year
Spectrum Analyzer	R&S	FSV3044	101289	2023/9/14	1Year
Analog Signal Generator	R&S	SMB100A	183237	2023/9/16	1Year
Vector Signal Generator	R&S	SMM100A	101808	2023/9/16	1Year
RF Control Unit(Power Meter)	Tonscend	JS0806-2	22C8060567	2023/9/14	1Year
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	2023/5/10	1 Year

### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

#### U-NII 5 Band (5925 ~ 6425MHz)

802.11ax(HE20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955MHz	5	5975MHz	9	5995MHz	13	6015MHz
17	6035MHz	21	6055MHz	25	6075MHz	29	6095MHz
33	6115MHz	37	6135MHz	41	6155MHz	45	6175MHz
49	6195MHz	53	6215MHz	57	6235MHz	61	6255MHz
65	6275MHz	69	6295MHz	73	6315MHz	77	6335MHz
81	6355MHz	85	6375MHz	89	6395MHz	93	6415MHz

802.11ax(HE40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965MHz	11	6005MHz	19	6045MHz	27	6085MHz
35	6125MHz	43	6165MHz	51	6205MHz	59	6245MHz
67	6285MHz	75	6325MHz	83	6365MHz	91	6405MHz

802.11ax(HE80)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985MHz	23	6065MHz	39	6145MHz	55	6225MHz
71	6305MHz	87	6385MHz	-	-	-	-

802.11ax(HE160)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025MHz	47	6185MHz	79	6345MHz	-	-



**U-NII 6 Band (6425 ~ 6525MHz)**

802.11ax(HE20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
97	6435MHz	101	6455MHz	105	6475MHz	109	6495MHz
113	6515MHz	-	-	-	-	-	-

802.11ax(HE40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
99	6445MHz	107	6485MHz	115	6525MHz	-	-

802.11ax(HE80)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
103	6465MHz	119	6545MHz	-	-	-	-

802.11ax(HE160)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
111	6505MHz	-	-	-	-	-	-

**U-NII7Band(6525~6875MHz)**

802.11ax(HE20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
117	6535MHz	121	6555MHz	125	6575MHz	129	6595MHz
133	6615MHz	137	6635MHz	141	6655MHz	145	6675MHz
149	6695MHz	153	6715MHz	157	6735MHz	161	6755MHz
165	6775MHz	169	6795MHz	173	6815MHz	177	6835MHz
181	6855MHz	185	6875MHz	-	-	-	-

802.11ax(HE40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
123	6565MHz	131	6605MHz	139	6645MHz	147	6685MHz
155	6725MHz	163	6765MHz	171	6805MHz	179	6845MHz
187	6885MHz	-	-	-	-	-	-

802.11ax(HE80)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
135	6625MHz	151	6705MHz	167	6785MHz	183	6865MHz

802.11ax(HE160)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
143	6665MHz	175	6825MHz	-	-	-	-

**U-NII8Band(6875~7125MHz)**

802.11ax(HE20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
189	6895MHz	193	6915MHz	197	6935MHz	201	6955MHz
205	6975MHz	209	6995MHz	213	7015MHz	217	7035MHz
221	7055MHz	225	7075MHz	229	7095MHz	233	7115MHz

802.11ax(HE40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
195	6925MHz	203	6965MHz	211	7005MHz	219	7045MHz
227	7085MHz	-	-	-	-	-	-

802.11ax(HE80)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
199	6945MHz	215	7025MHz	-	-	-	-

802.11ax(HE160)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
207	6985MHz	-	-	-	-	-	-

Multi-antenna correlation:

<input checked="" type="checkbox"/>	Transmit Signals are Correlated
	Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
<input type="checkbox"/>	All Transmit Signals are Completely Uncorrelated
	Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi

Directional gain =  $10 \log [(10^{0.98/20} + 10^{0.8/20})^2 / 2]$  dBi=3.9 dBi

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (Shenzhen) Co., Ltd.

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 LABORATORY ACCREDITATIONS AND LISTINGS

#### Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L2291.

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

**Accredited by FCC**

Designation Number: CN1204

Test Firm Registration Number: 882943

**Accredited by A2LA**

The Certificate Number is 4321.01.

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location

: Building 69, Majialong Industry Zone,  
Nanshan District, Shenzhen, Guangdong, China

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Test Parameter	Measurement Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
99%, 26dB Bandwidth	$\pm 1.0\text{dB}$
Conducted Output Power	$\pm 1.0\text{dB}$
Power Spectral Density	$\pm 1.0\text{dB}$
In-Band Emissions (Mask)	$\pm 1.0\text{dB}$
Contention Based Protocol	$\pm 1.0\text{dB}$
Dual Client- Proper Power Adjustment	$\pm 1.0\text{dB}$
Power Line Conducted Emission	$\pm 2.0\text{dB}$
Radiated Spurious Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%.

## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

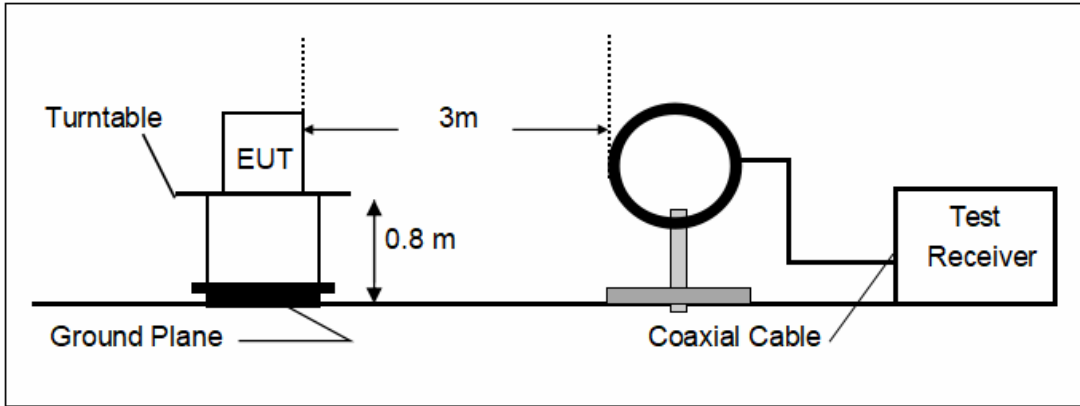

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

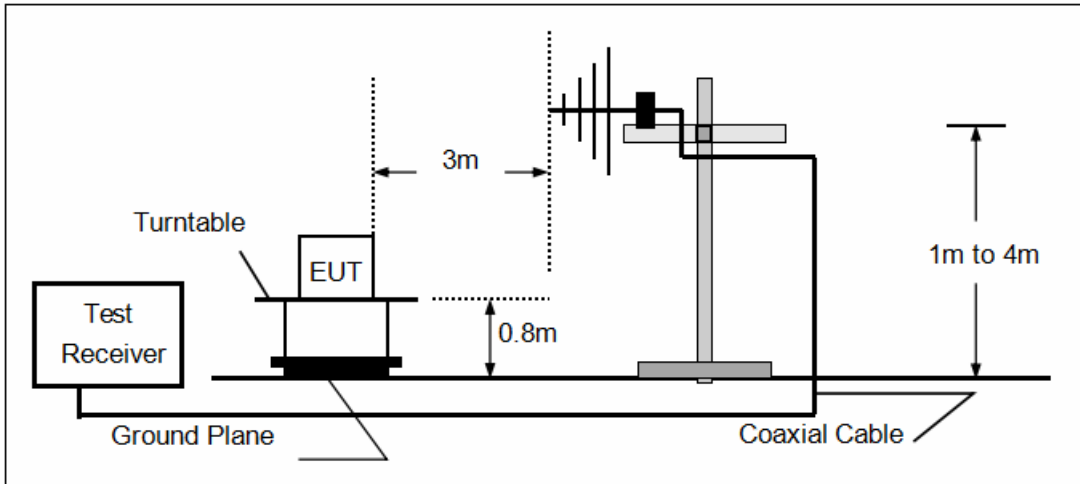

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

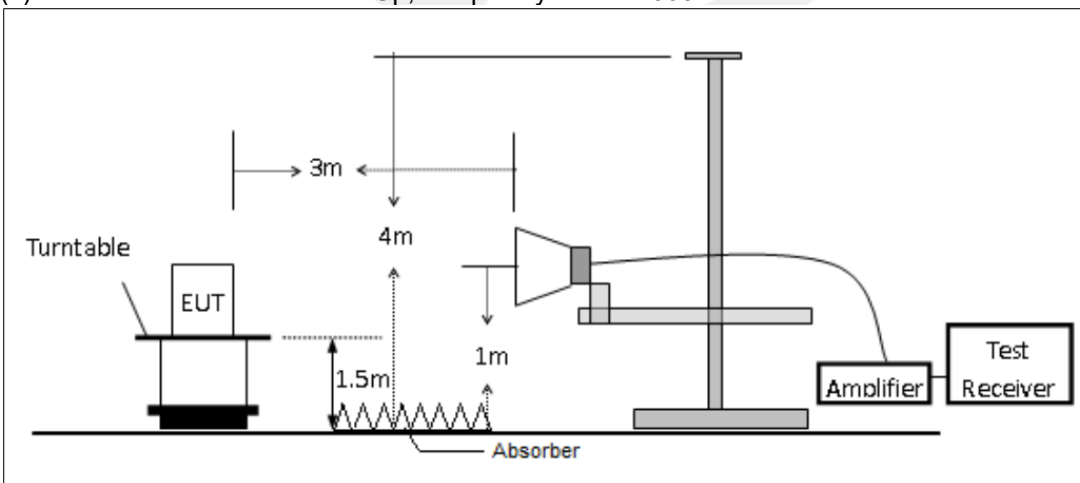


### 7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

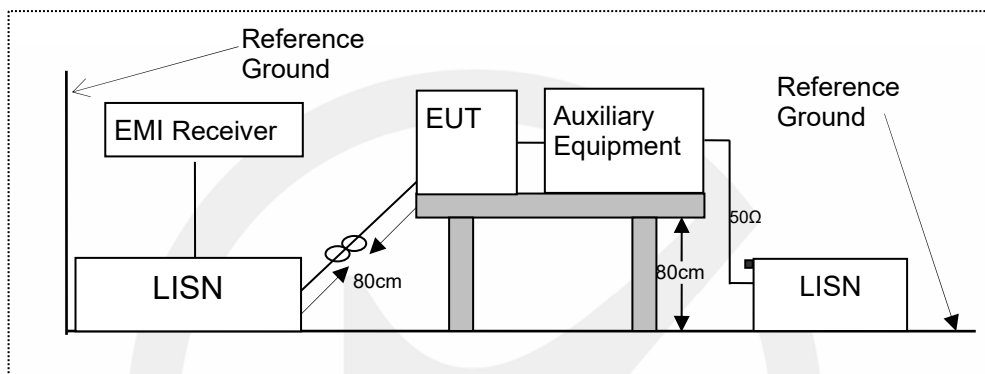

## 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

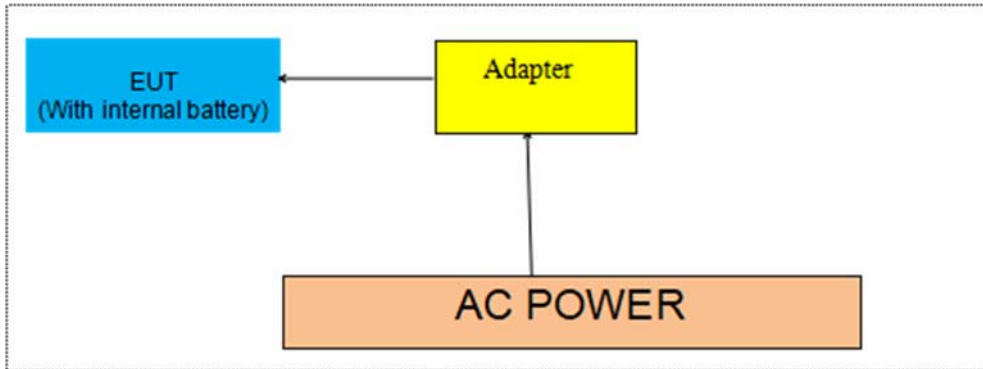

## 7.5 SUPPORT EQUIPMENT

N/A

### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 8 TEST REQUIREMENTS

### 8.1 OCCUPIED BANDWIDTH

#### 8.1.1 Applicable Standard

According to FCC Part 15.407(a)  
According to 789033 D02 Section II.C.1 and Section II.D  
According to 987594 D02 Section II.C and Section II.D  
According to RSS-Gen6.7, RSS-248 4.4

#### 8.1.2 Conformance Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

#### 8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup.

#### 8.1.4 Test Procedure

##### Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

##### 99% Occupied Bandwidth

The following procedure shall be used for measuring (99 %) power bandwidth:

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1 % to 5 % of the OBW
- Set VBW  $\geq 3 \times$  RBW
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99 % power bandwidth function of the instrument.

#### 8.1.5 Test Results


##### PASS

Temperature :	25°C	ATM Pressure:	1011 mbar
Humidity :	60 %	Test Engineer:	XXH


TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11AX20MIMO	Ant2	5955	25.20	5942.44	5967.64	See 8.1.2	Pass
	Ant1	5955	25.04	5942.48	5967.52	See 8.1.2	Pass
	Ant2	6175	25.32	6162.40	6187.72	See 8.1.2	Pass
	Ant1	6175	25.04	6162.28	6187.32	See 8.1.2	Pass
	Ant2	6415	26.96	6401.72	6428.68	See 8.1.2	Pass
	Ant1	6415	26.24	6402.24	6428.48	See 8.1.2	Pass
	Ant2	6435	26.00	6422.00	6448.00	See 8.1.2	Pass
	Ant1	6435	26.40	6421.80	6448.20	See 8.1.2	Pass
	Ant2	6475	26.28	6462.12	6488.40	See 8.1.2	Pass
	Ant1	6475	25.64	6462.20	6487.84	See 8.1.2	Pass
	Ant2	6515	24.44	6502.56	6527.00	See 8.1.2	Pass
	Ant1	6515	25.60	6501.88	6527.48	See 8.1.2	Pass
	Ant2	6535	25.80	6522.04	6547.84	See 8.1.2	Pass
	Ant1	6535	26.16	6522.04	6548.20	See 8.1.2	Pass
	Ant2	6695	25.64	6681.80	6707.44	See 8.1.2	Pass
	Ant1	6695	24.68	6682.68	6707.36	See 8.1.2	Pass
	Ant2	6855	25.04	6842.60	6867.64	See 8.1.2	Pass
	Ant1	6855	26.48	6841.72	6868.20	See 8.1.2	Pass
	Ant2	6875	25.92	6861.84	6887.76	See 8.1.2	Pass
	Ant1	6875	25.48	6862.28	6887.76	See 8.1.2	Pass
Ant2	6895	26.40	6881.76	6908.16	See 8.1.2	Pass	
Ant1	6895	26.92	6881.68	6908.60	See 8.1.2	Pass	
Ant2	6995	24.08	6983.08	7007.16	See 8.1.2	Pass	
Ant1	6995	26.88	6981.28	7008.16	See 8.1.2	Pass	
Ant2	7115	26.28	7101.48	7127.76	See 8.1.2	Pass	
Ant1	7115	33.80	7095.32	7129.12	See 8.1.2	Pass	
11AX40MIMO	Ant2	5965	46.40	5941.16	5987.56	See 8.1.2	Pass
	Ant1	5965	45.36	5942.44	5987.80	See 8.1.2	Pass
	Ant2	6165	46.64	6141.08	6187.72	See 8.1.2	Pass
	Ant1	6165	46.32	6141.96	6188.28	See 8.1.2	Pass
	Ant2	6405	48.32	6380.92	6429.24	See 8.1.2	Pass
	Ant1	6405	46.40	6381.64	6428.04	See 8.1.2	Pass
	Ant2	6445	47.04	6421.16	6468.20	See 8.1.2	Pass
	Ant1	6445	46.80	6421.56	6468.36	See 8.1.2	Pass
	Ant2	6485	47.28	6461.64	6508.92	See 8.1.2	Pass
	Ant1	6485	45.04	6462.36	6507.40	See 8.1.2	Pass
	Ant2	6525	45.68	6501.72	6547.40	See 8.1.2	Pass
	Ant1	6525	45.84	6501.72	6547.56	See 8.1.2	Pass
	Ant2	6565	46.64	6541.16	6587.80	See 8.1.2	Pass
	Ant1	6565	46.64	6541.96	6588.60	See 8.1.2	Pass
	Ant2	6685	46.16	6662.12	6708.28	See 8.1.2	Pass
	Ant1	6685	45.68	6662.12	6707.80	See 8.1.2	Pass
	Ant2	6845	46.00	6821.64	6867.64	See 8.1.2	Pass
	Ant1	6845	46.00	6822.04	6868.04	See 8.1.2	Pass
	Ant2	6885	47.04	6861.88	6908.92	See 8.1.2	Pass
	Ant1	6885	45.36	6862.52	6907.88	See 8.1.2	Pass
Ant2	6925	46.88	6901.16	6948.04	See 8.1.2	Pass	
Ant1	6925	47.36	6900.84	6948.20	See 8.1.2	Pass	
Ant2	6965	48.08	6940.84	6988.92	See 8.1.2	Pass	
Ant1	6965	47.84	6940.60	6988.44	See 8.1.2	Pass	
Ant2	7085	46.16	7061.64	7107.80	See 8.1.2	Pass	
Ant1	7085	46.48	7061.88	7108.36	See 8.1.2	Pass	
11AX80MIMO	Ant2	5985	83.84	5943.08	6026.92	See 8.1.2	Pass
	Ant1	5985	85.60	5942.12	6027.72	See 8.1.2	Pass
	Ant2	6145	83.04	6103.24	6186.28	See 8.1.2	Pass
	Ant1	6145	84.00	6102.92	6186.92	See 8.1.2	Pass
	Ant2	6385	85.12	6342.12	6427.24	See 8.1.2	Pass
	Ant1	6385	85.60	6341.48	6427.08	See 8.1.2	Pass
Ant2	6465	85.28	6422.76	6508.04	See 8.1.2	Pass	

	Ant1	6465	85.12	6422.60	6507.72	See 8.1.2	Pass
	Ant2	6545	85.28	6502.44	6587.72	See 8.1.2	Pass
	Ant1	6545	84.32	6503.24	6587.56	See 8.1.2	Pass
	Ant2	6625	83.04	6583.40	6666.44	See 8.1.2	Pass
	Ant1	6625	85.28	6582.44	6667.72	See 8.1.2	Pass
	Ant2	6705	83.52	6663.72	6747.24	See 8.1.2	Pass
	Ant1	6705	85.28	6662.28	6747.56	See 8.1.2	Pass
	Ant2	6785	84.80	6743.24	6828.04	See 8.1.2	Pass
	Ant1	6785	84.32	6742.44	6826.76	See 8.1.2	Pass
	Ant2	6865	84.48	6822.44	6906.92	See 8.1.2	Pass
	Ant1	6865	84.96	6823.24	6908.20	See 8.1.2	Pass
	Ant2	6945	84.64	6902.60	6987.24	See 8.1.2	Pass
	Ant1	6945	88.32	6900.52	6988.84	See 8.1.2	Pass
	Ant2	7025	85.12	6981.32	7066.44	See 8.1.2	Pass
	Ant1	7025	84.80	6983.08	7067.88	See 8.1.2	Pass
11AX160MIMO	Ant2	6025	165.44	5942.44	6107.88	See 8.1.2	Pass
	Ant1	6025	165.12	5942.44	6107.56	See 8.1.2	Pass
	Ant2	6185	163.52	6103.40	6266.92	See 8.1.2	Pass
	Ant1	6185	164.48	6102.76	6267.24	See 8.1.2	Pass
	Ant2	6345	164.16	6263.08	6427.24	See 8.1.2	Pass
	Ant1	6345	164.48	6262.44	6426.92	See 8.1.2	Pass
	Ant2	6505	164.16	6423.08	6587.24	See 8.1.2	Pass
	Ant1	6505	164.80	6422.76	6587.56	See 8.1.2	Pass
	Ant2	6665	164.16	6583.08	6747.24	See 8.1.2	Pass
	Ant1	6665	166.72	6582.76	6749.48	See 8.1.2	Pass
	Ant2	6825	165.44	6742.12	6907.56	See 8.1.2	Pass
	Ant1	6825	165.44	6742.44	6907.88	See 8.1.2	Pass
	Ant2	6985	164.80	6902.76	7067.56	See 8.1.2	Pass
	Ant1	6985	164.48	6903.08	7067.56	See 8.1.2	Pass


11AX20MIMO\_Ant2\_5955

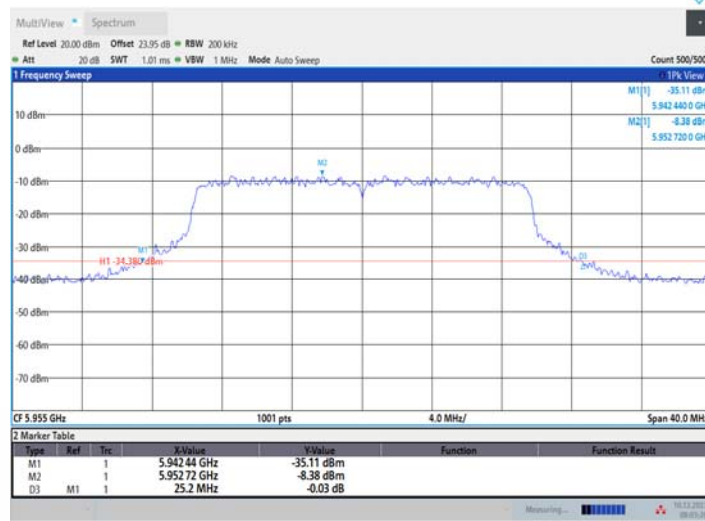


11AX20MIMO\_Ant1\_5955

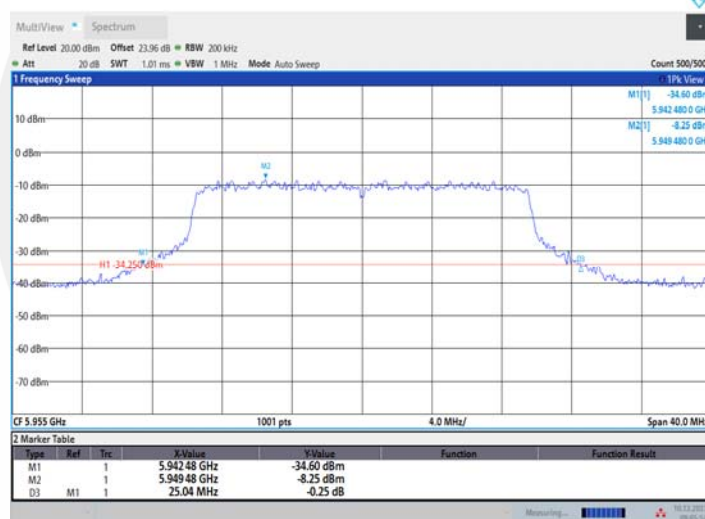


11AX20MIMO\_Ant2\_6175

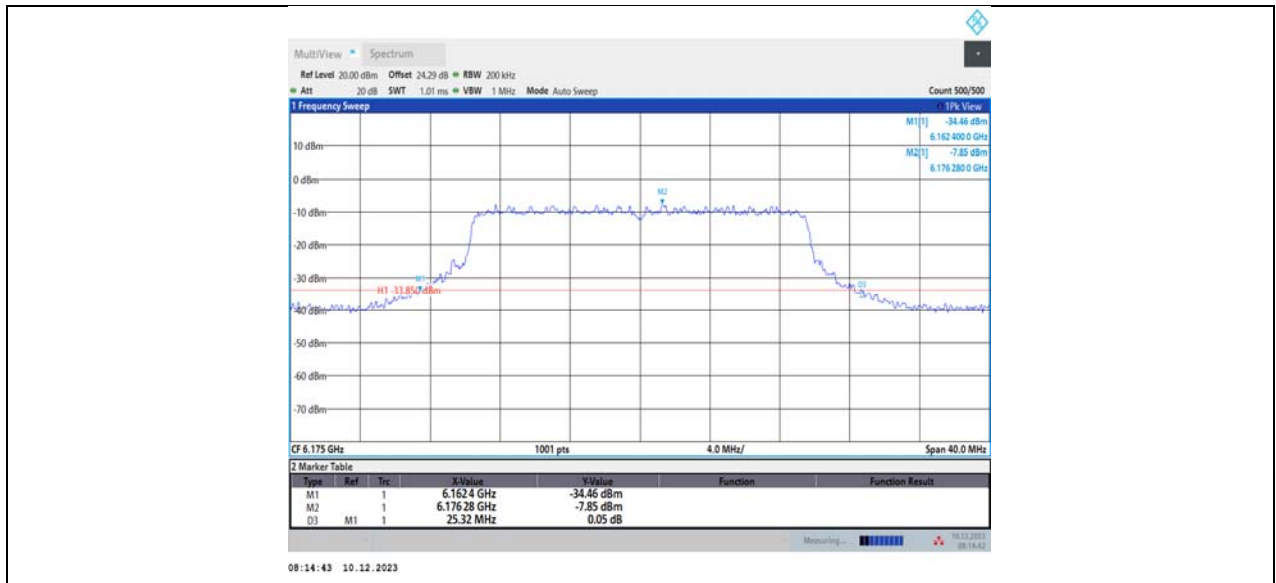


11AX20MIMO\_Ant1\_6175

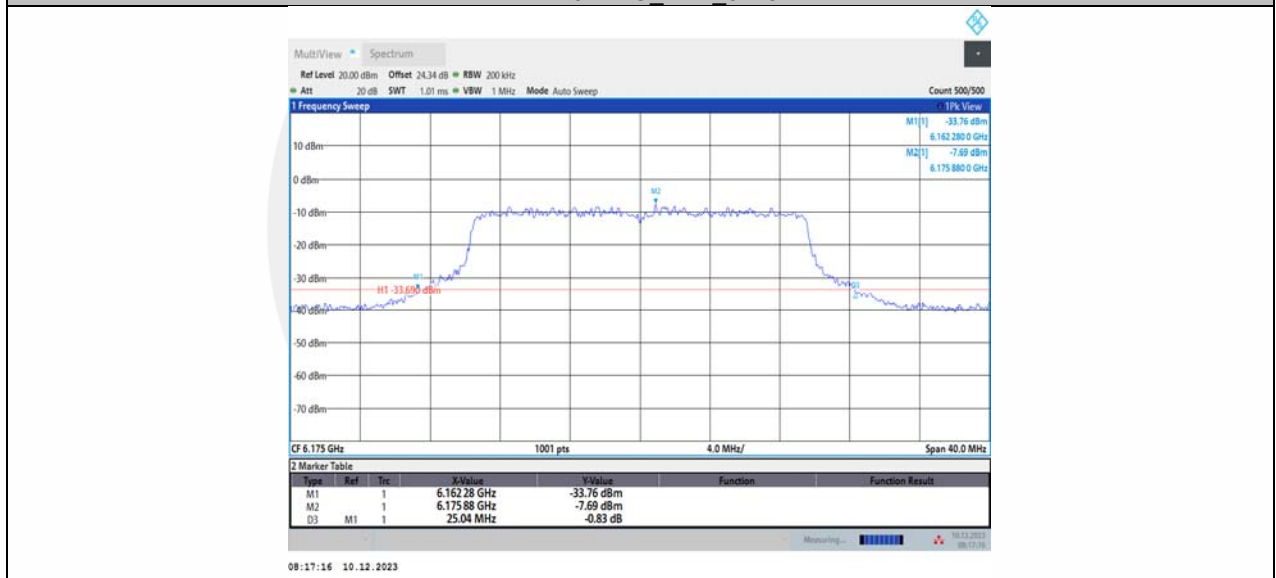


11AX20MIMO\_Ant2\_6415

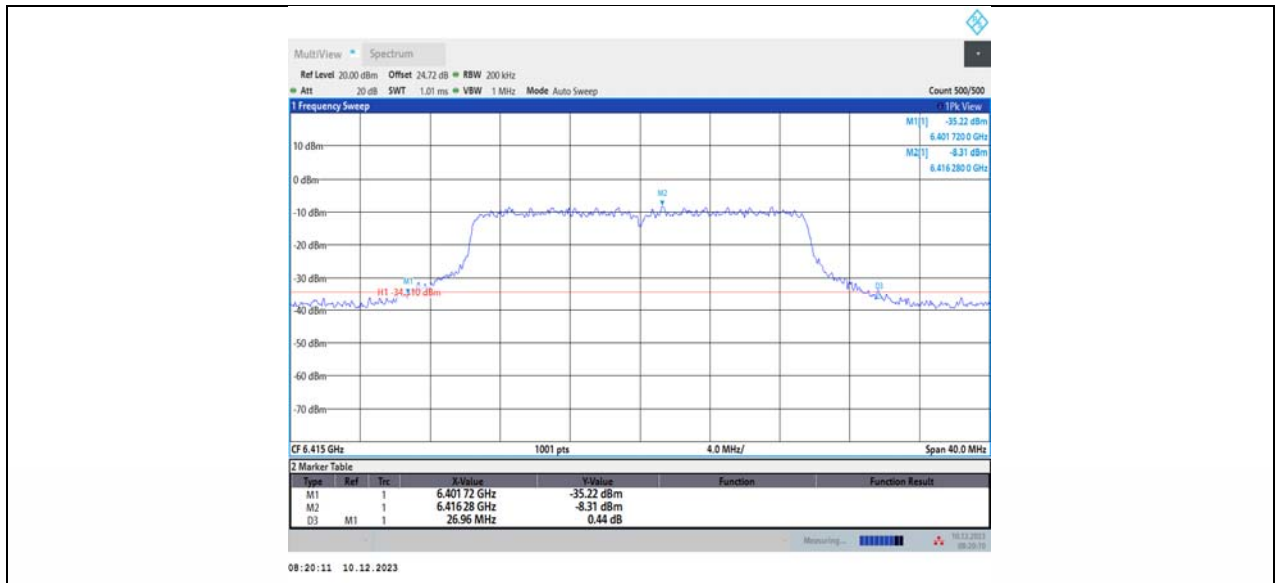


11AX20MIMO\_Ant1\_6415

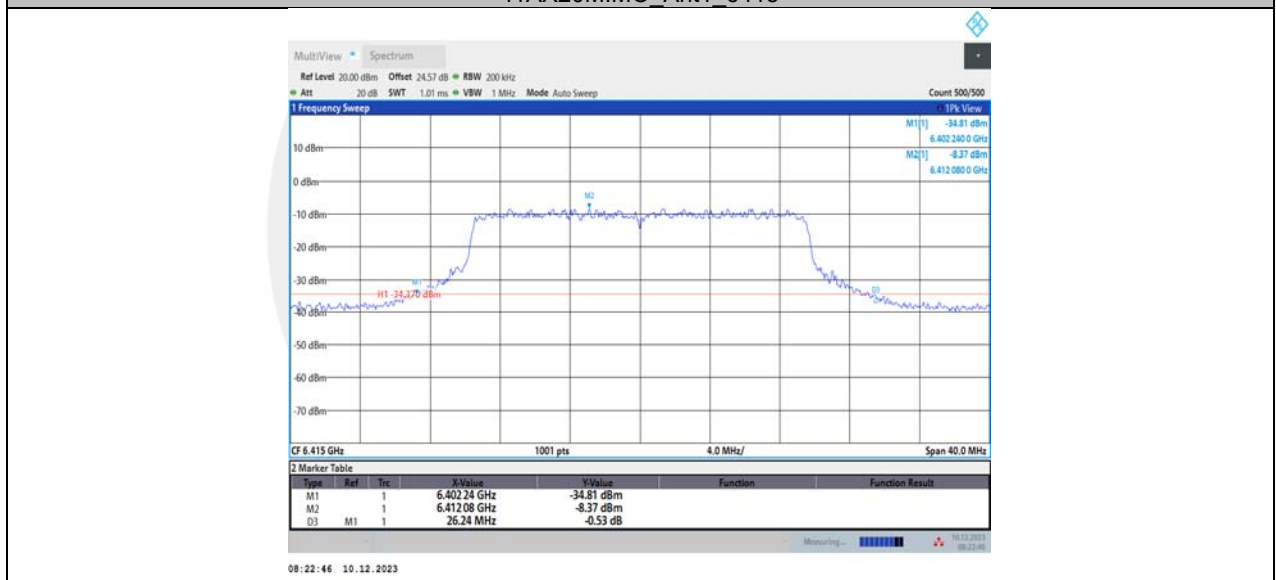

11AX20MIMO\_Ant2\_6435

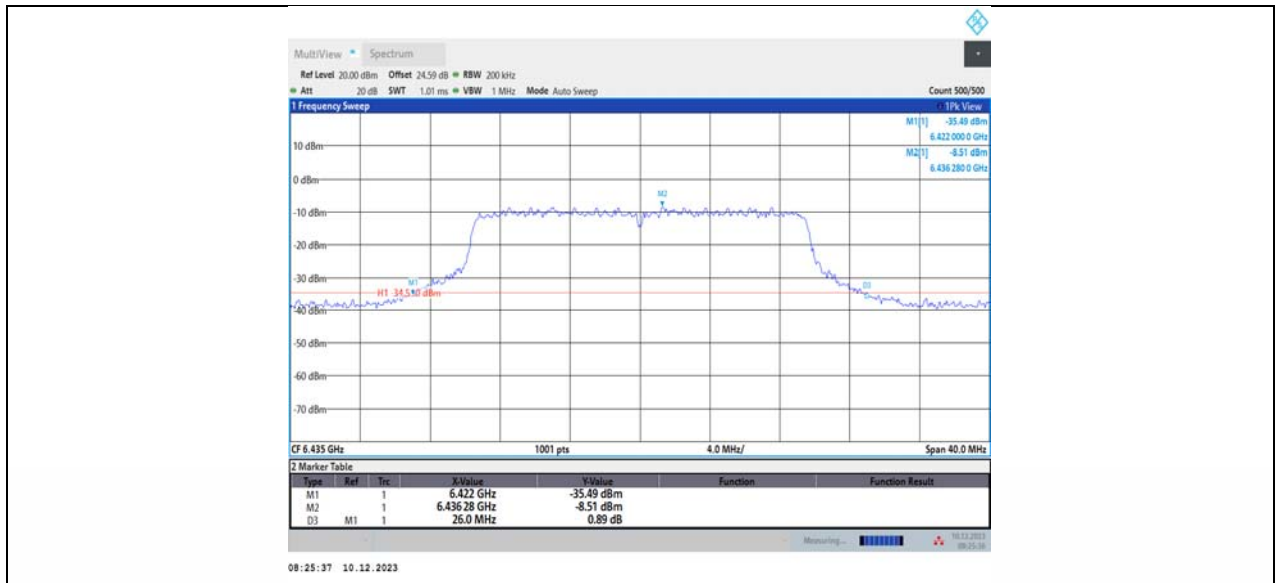


11AX20MIMO\_Ant1\_6435

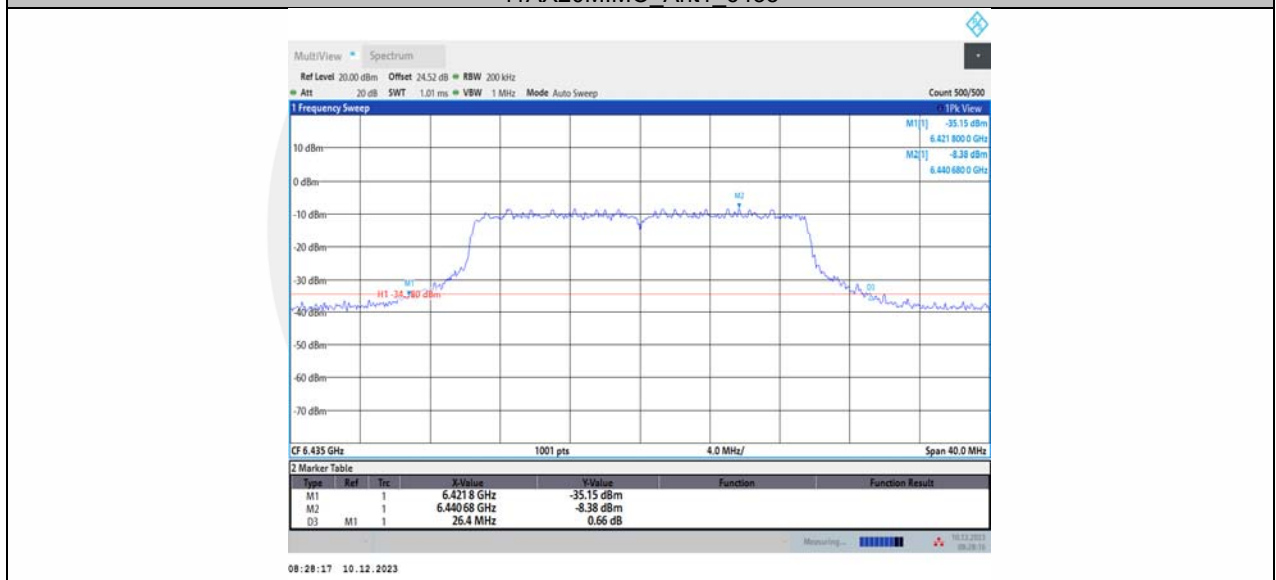

11AX20MIMO\_Ant2\_6475



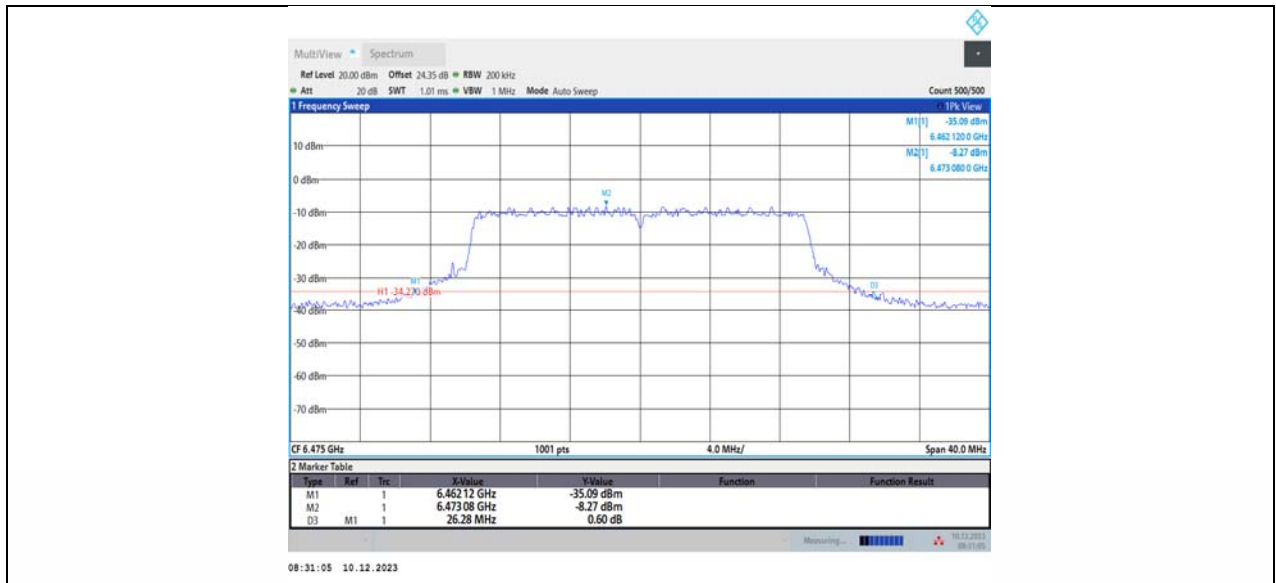


11AX20MIMO\_Ant1\_6475




11AX20MIMO\_Ant2\_6515




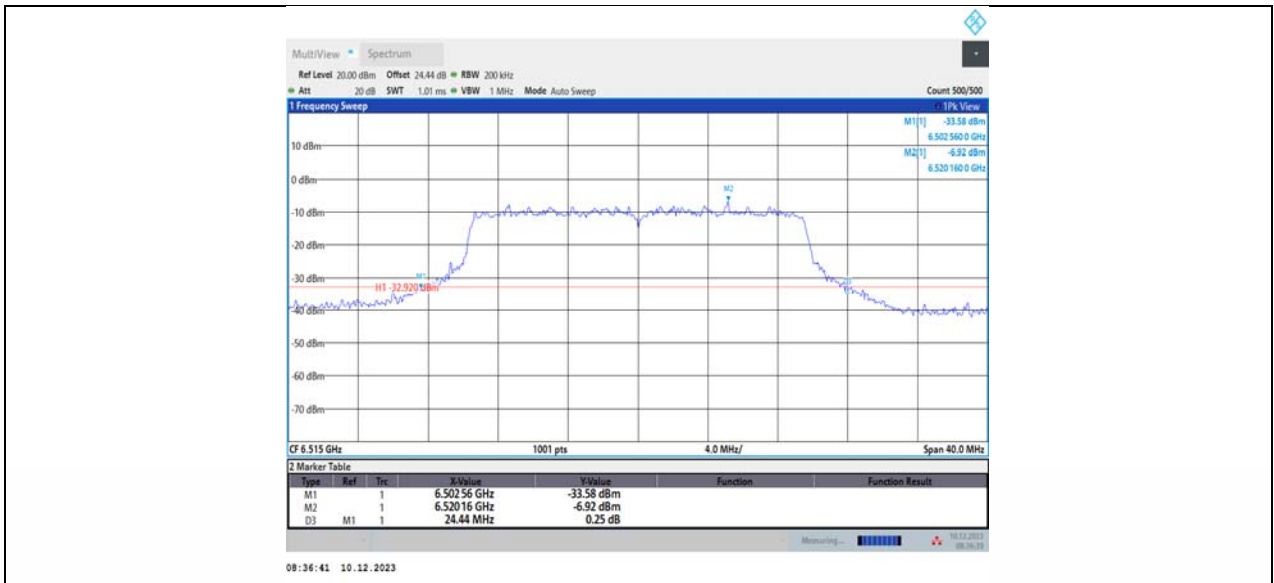


11AX20MIMO\_Ant1\_6515

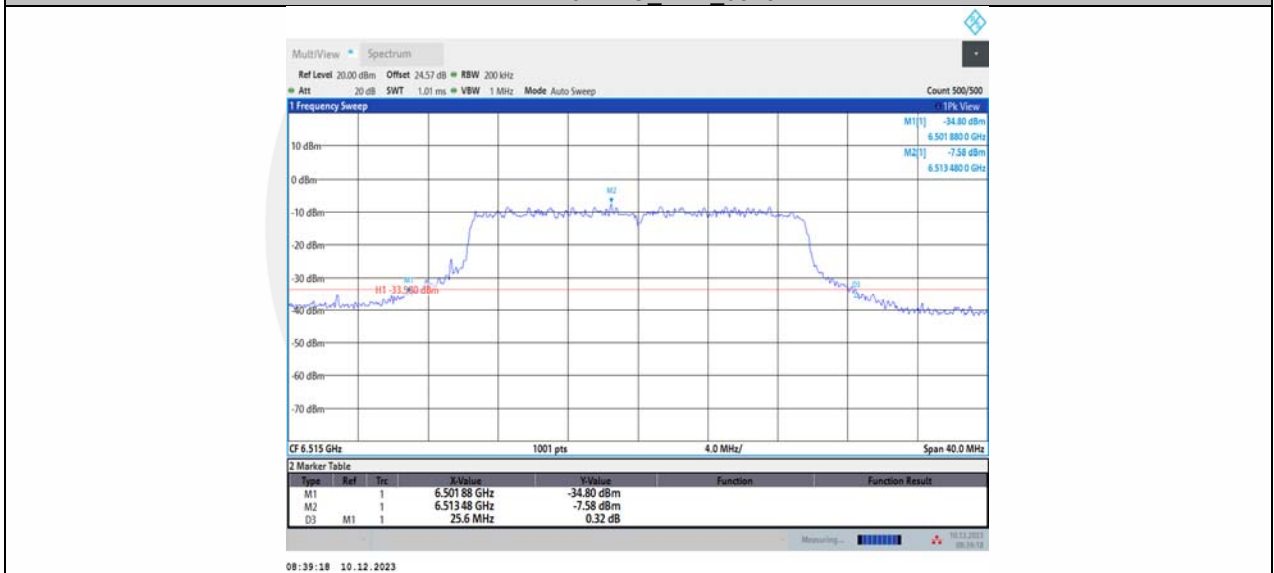


11AX20MIMO\_Ant2\_6535

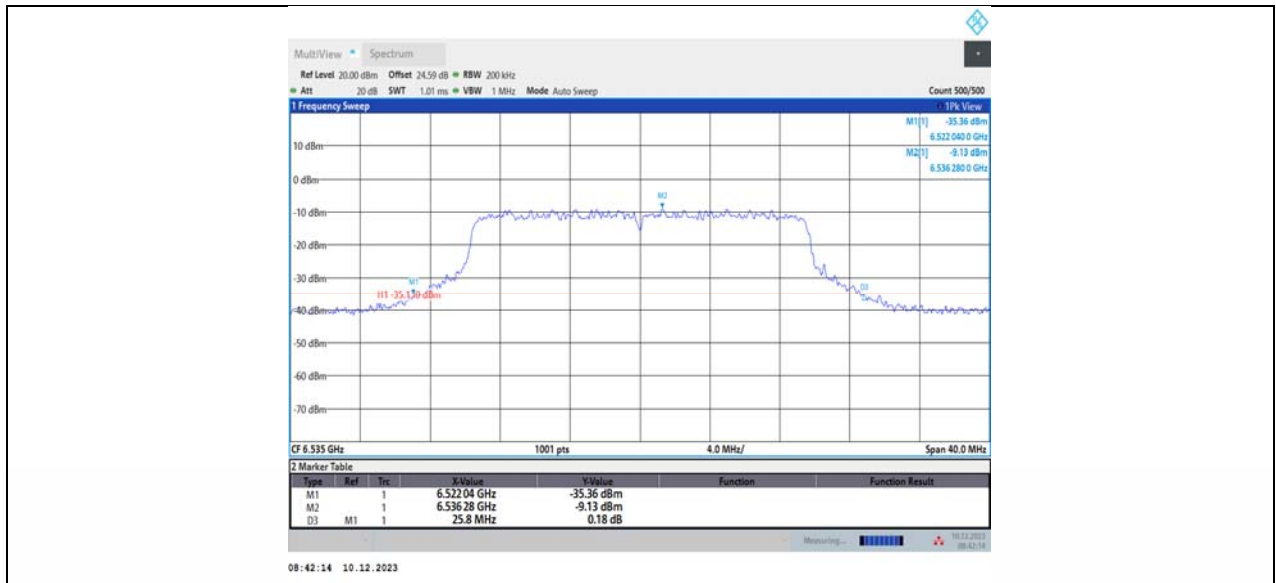


11AX20MIMO\_Ant1\_6535

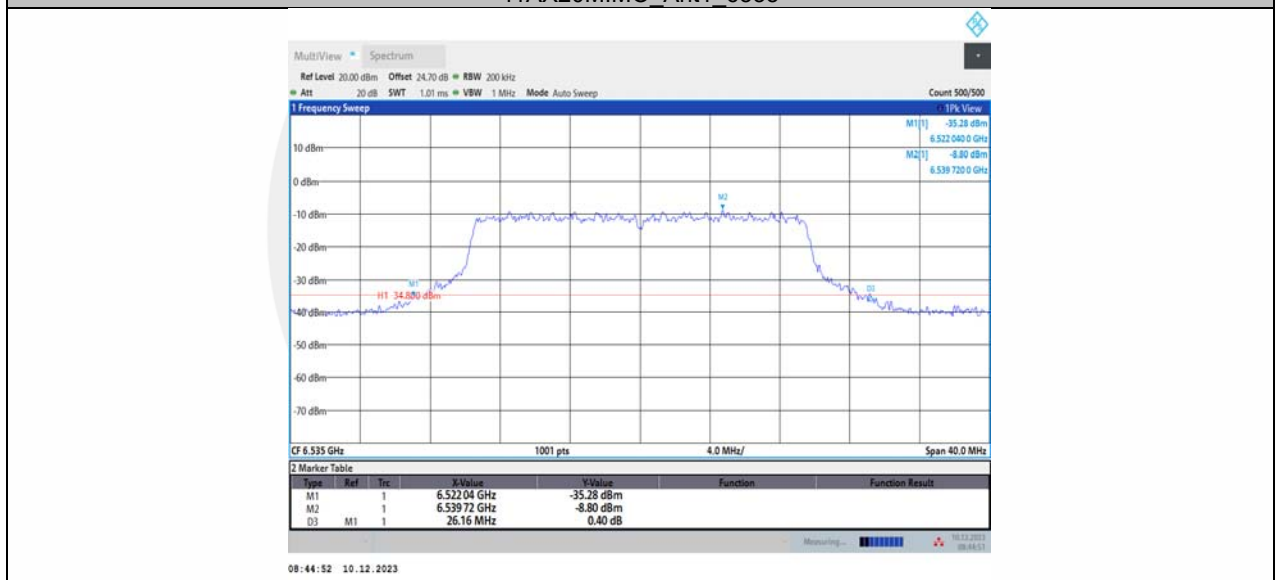


11AX20MIMO\_Ant2\_6695

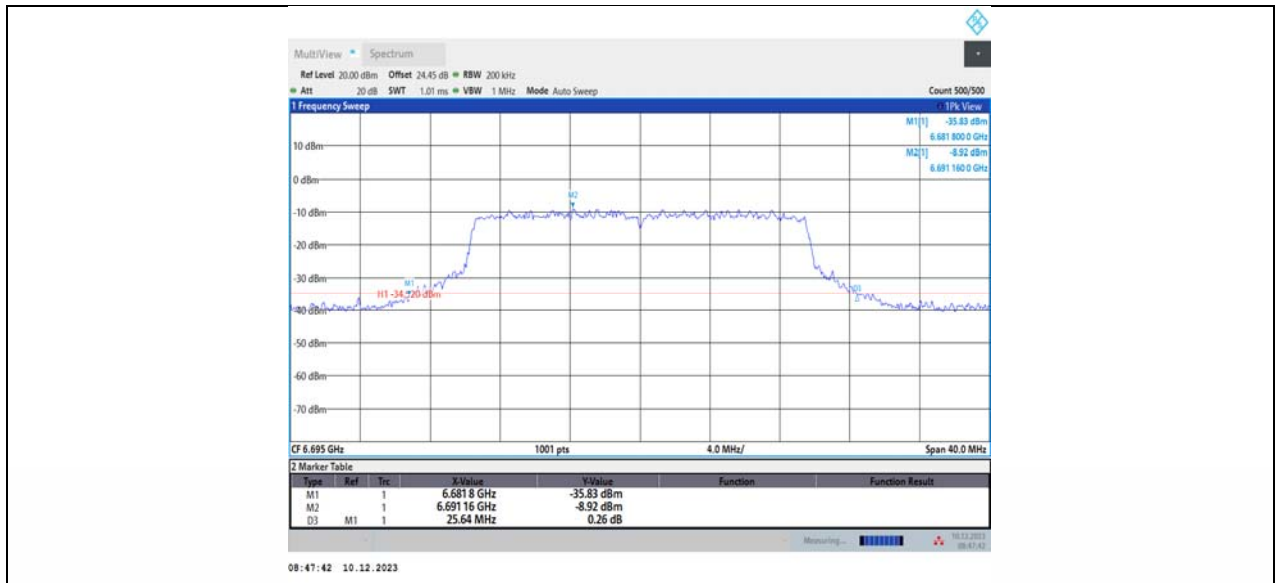


11AX20MIMO\_Ant1\_6695

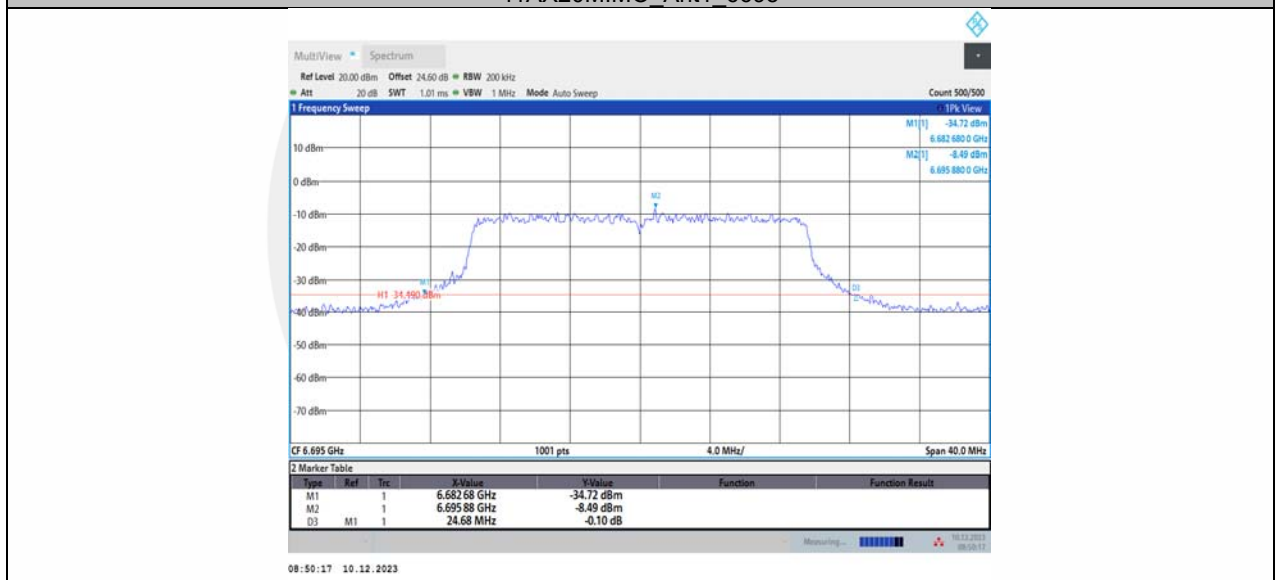


11AX20MIMO\_Ant2\_6855

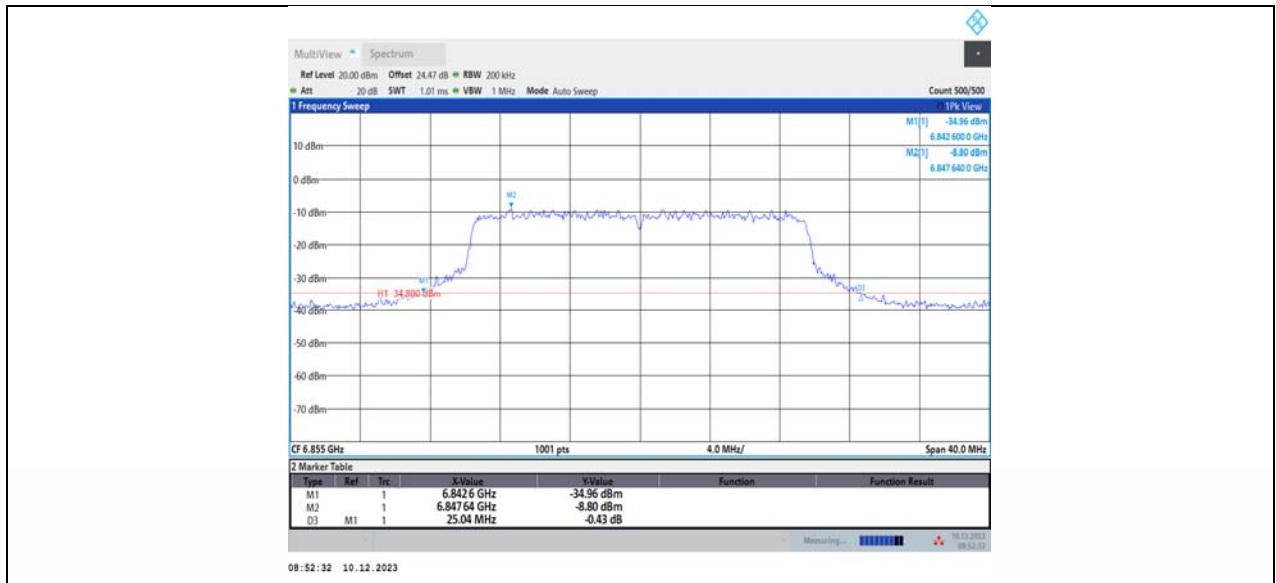

11AX20MIMO\_Ant1\_6855

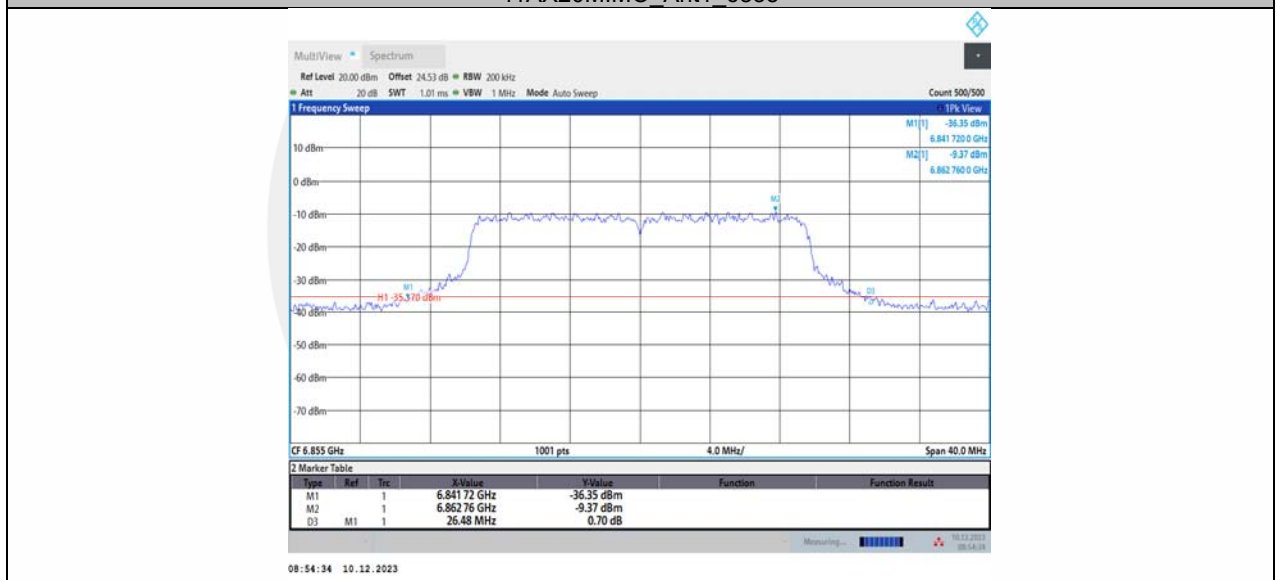

11AX20MIMO\_Ant2\_6875

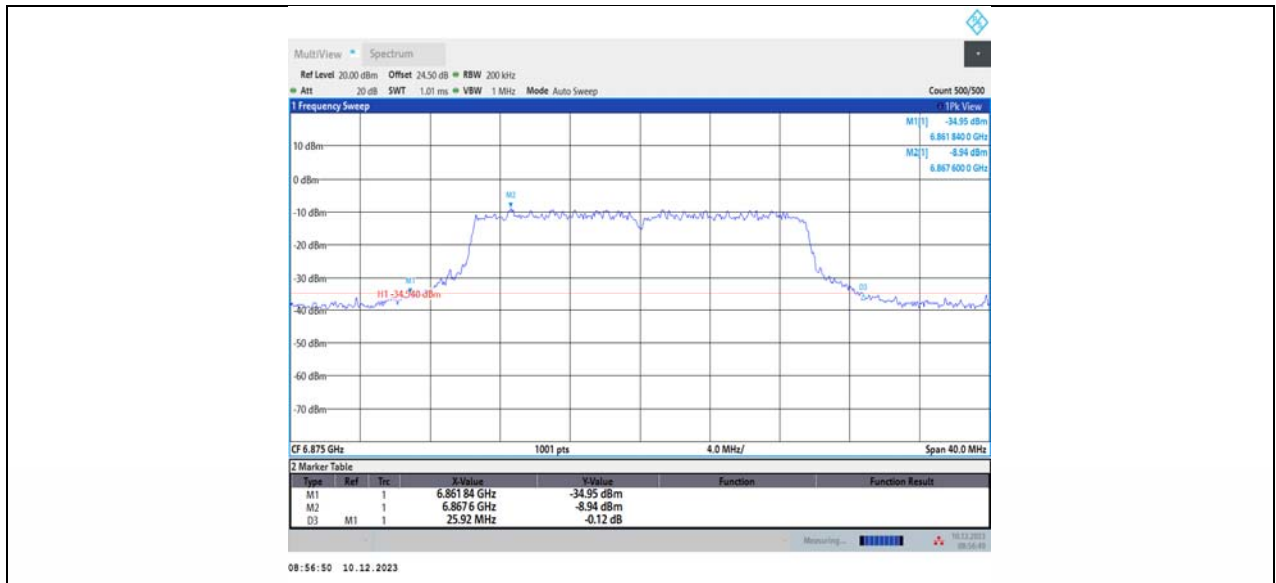

11AX20MIMO\_Ant1\_6875




11AX20MIMO\_Ant2\_6895




09:01:07 10.12.2023

11AX20MIMO\_Ant1\_6895

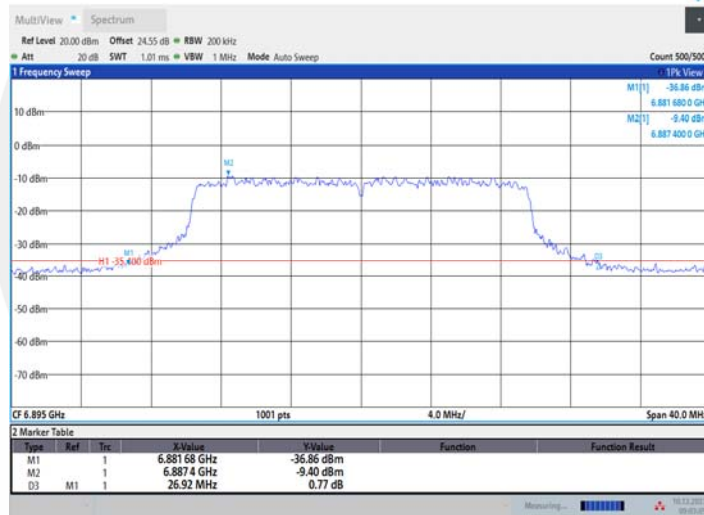


09:03:06 10.12.2023

11AX20MIMO\_Ant2\_6995

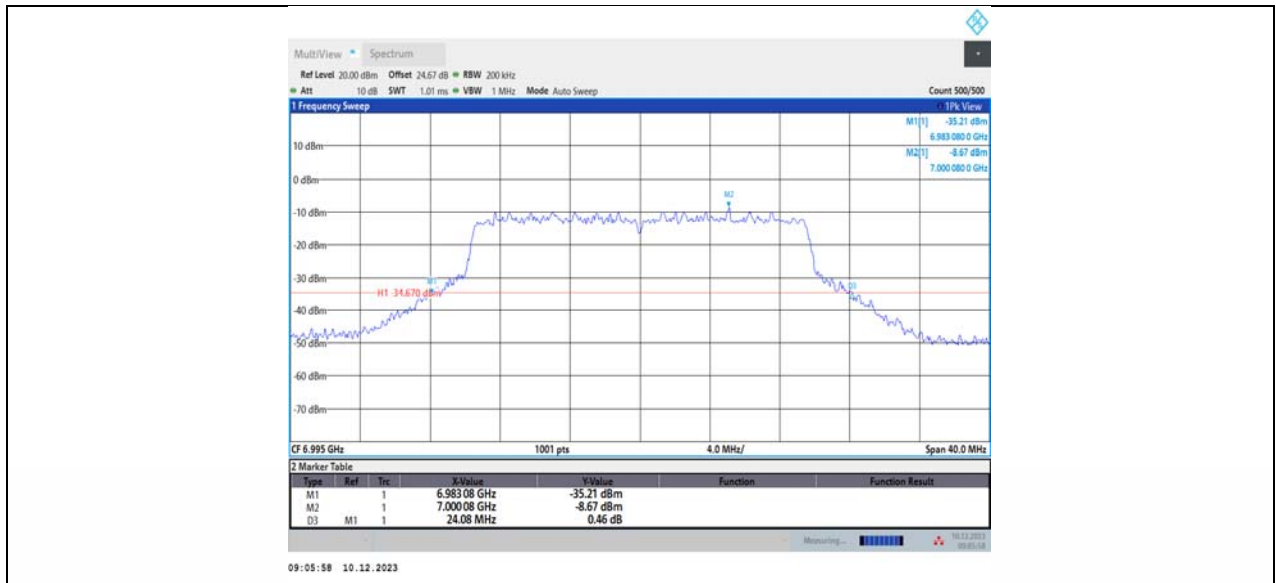


11AX20MIMO\_Ant1\_6995

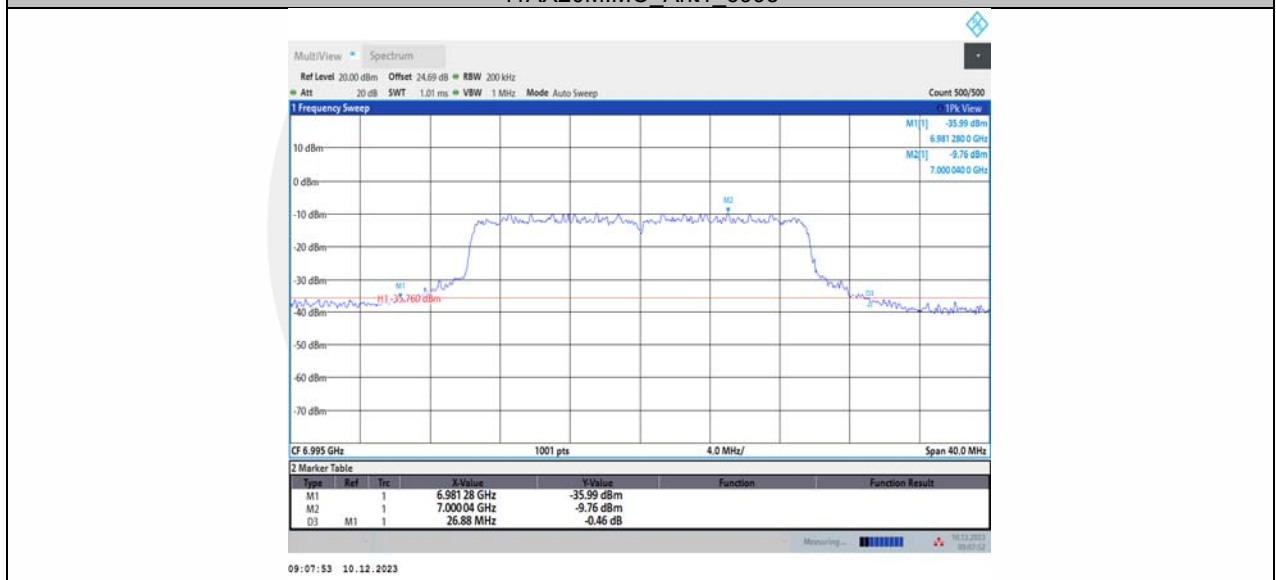


11AX20MIMO\_Ant2\_7115



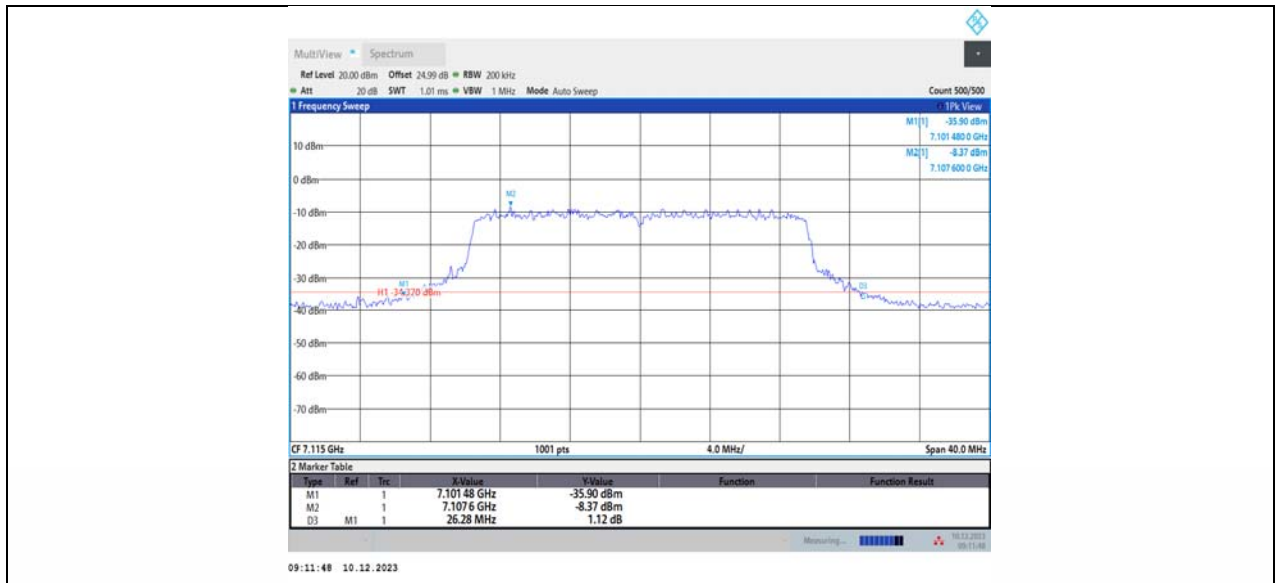


11AX20MIMO Ant1 7115

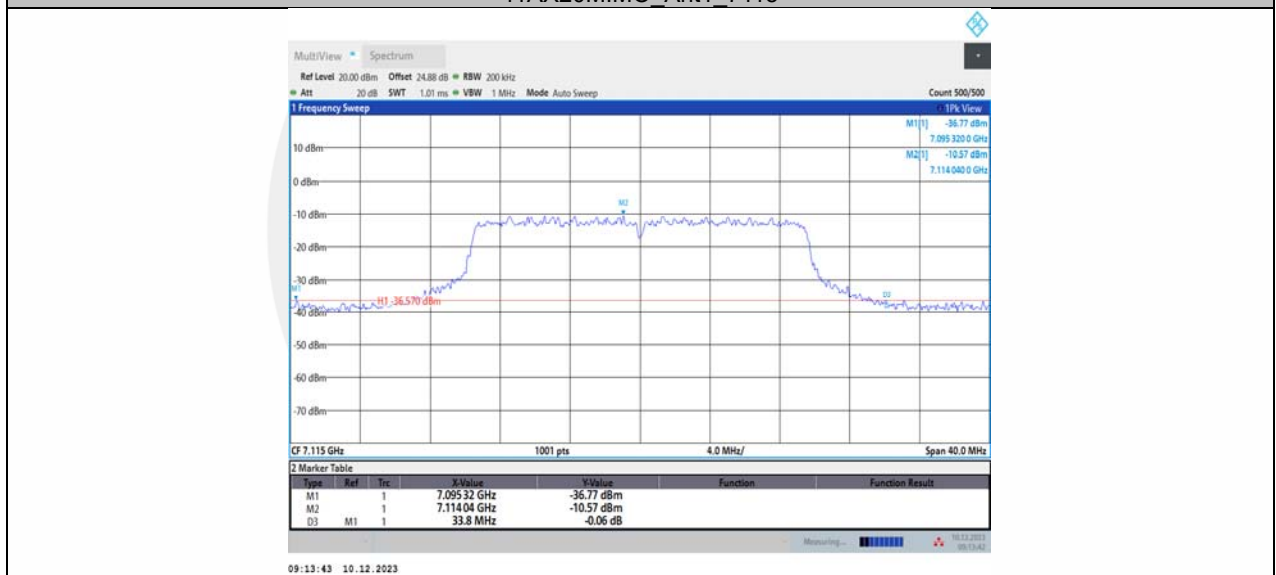


11AX40MIMO Ant2 5965




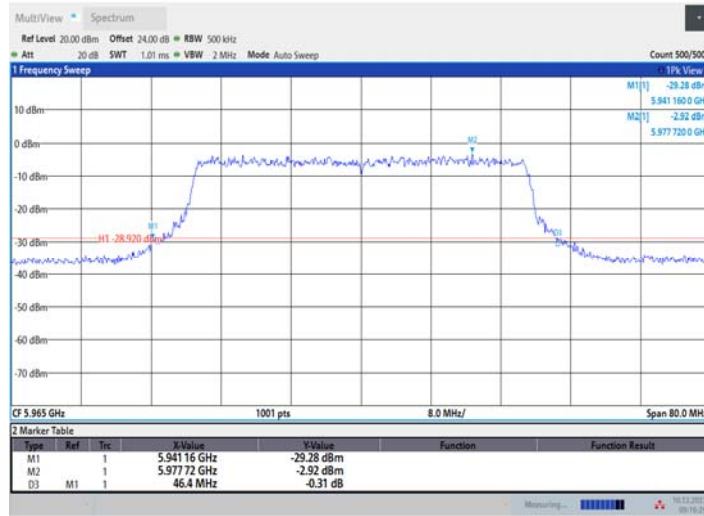


11AX40MIMO\_Ant1\_5965

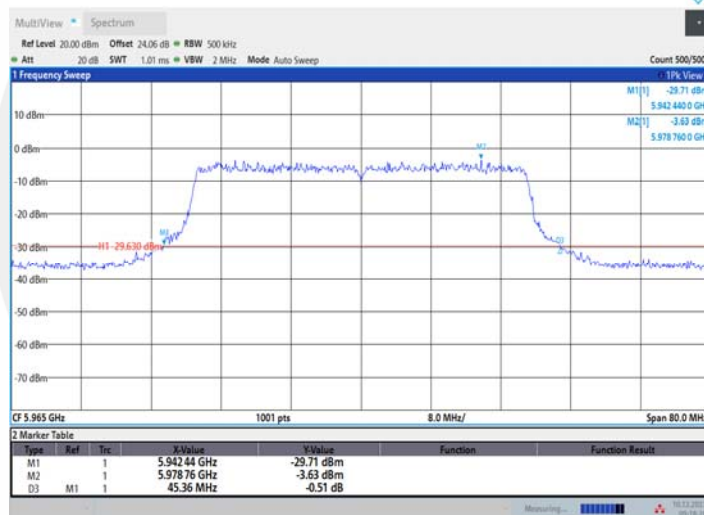


11AX40MIMO\_Ant2\_6165

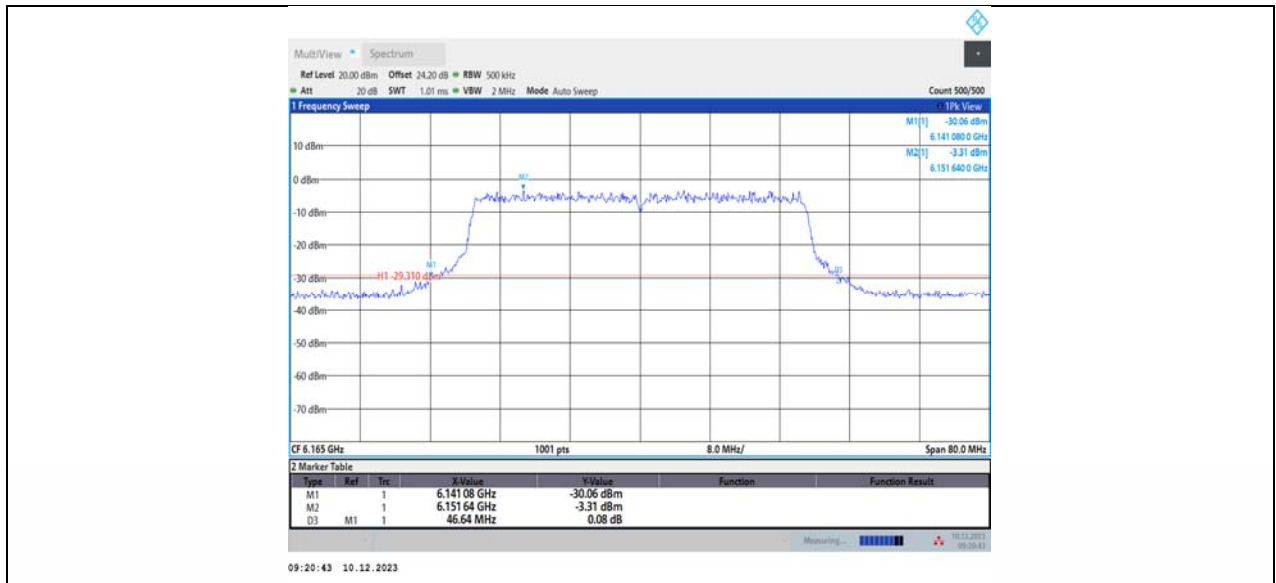


11AX40MIMO\_Ant1\_6165

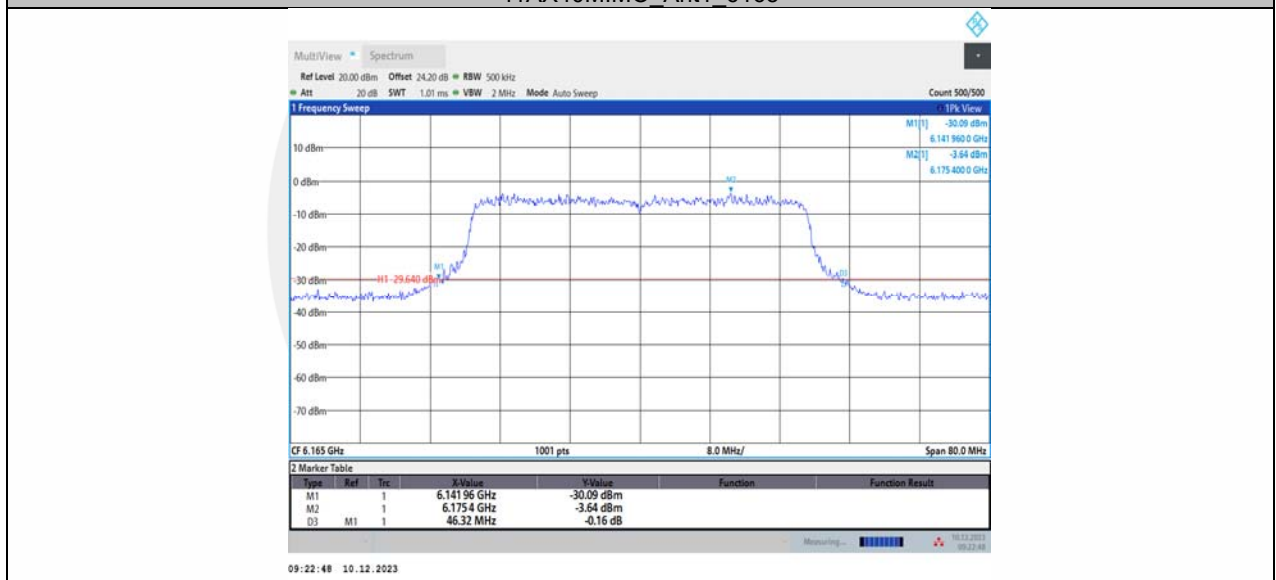


11AX40MIMO\_Ant2\_6405

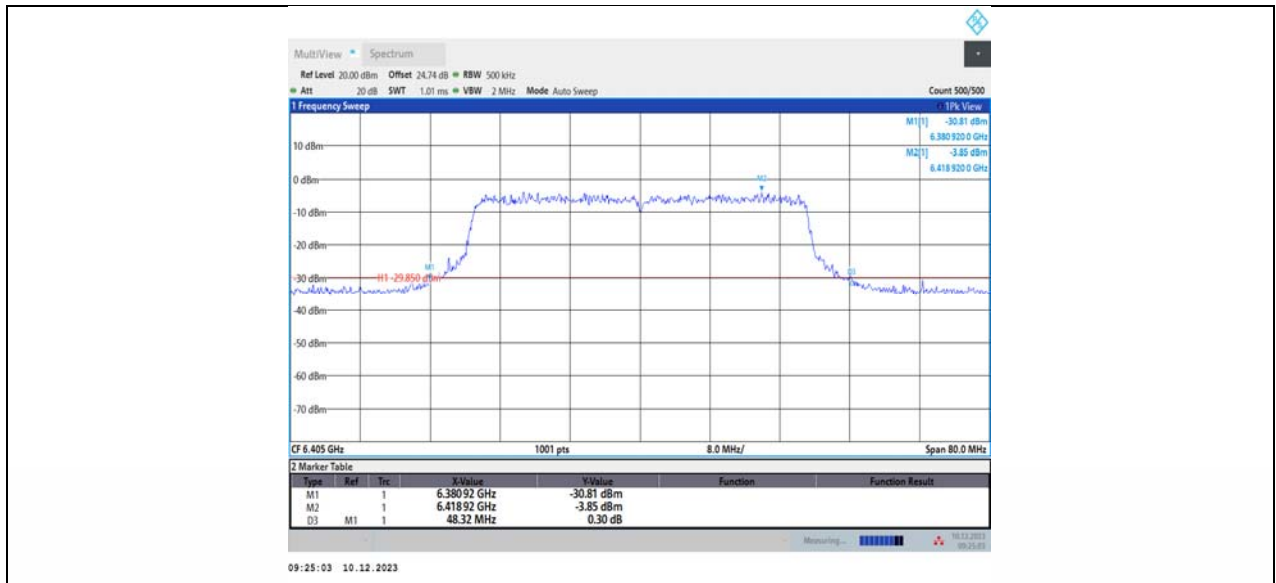


11AX40MIMO\_Ant1\_6405

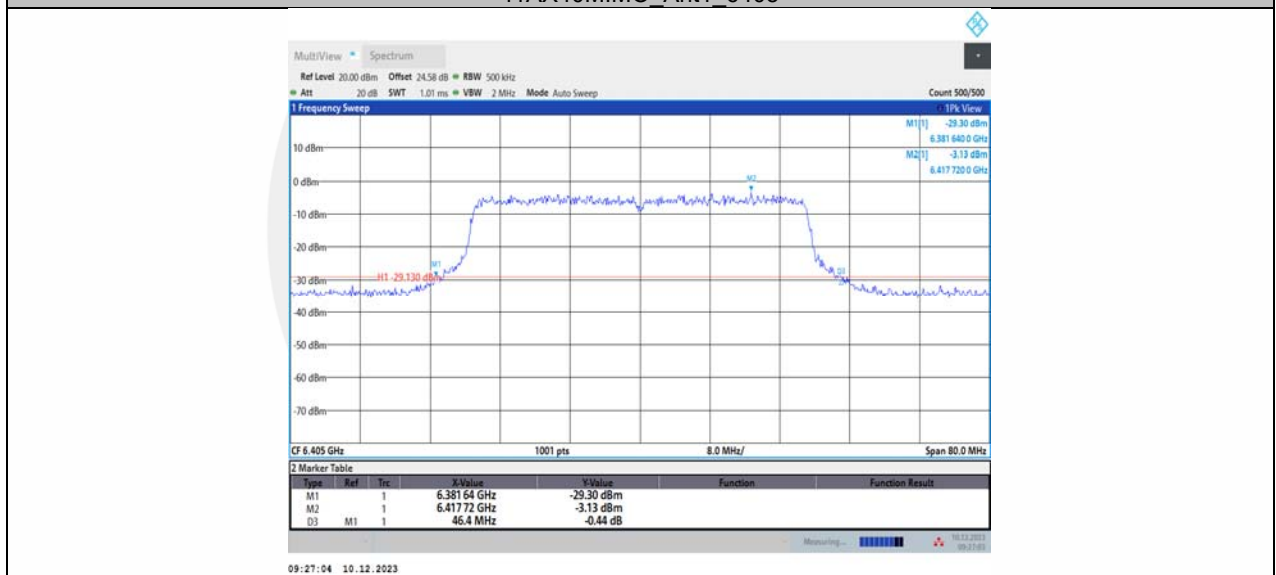


11AX40MIMO\_Ant2\_6445

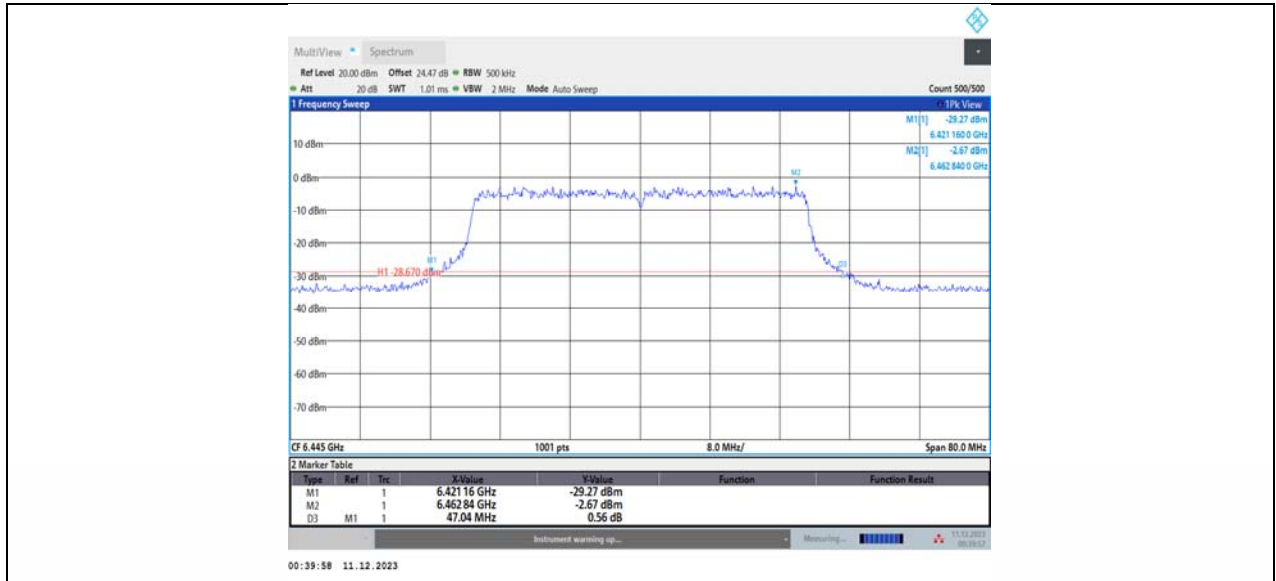


11AX40MIMO\_Ant1\_6445

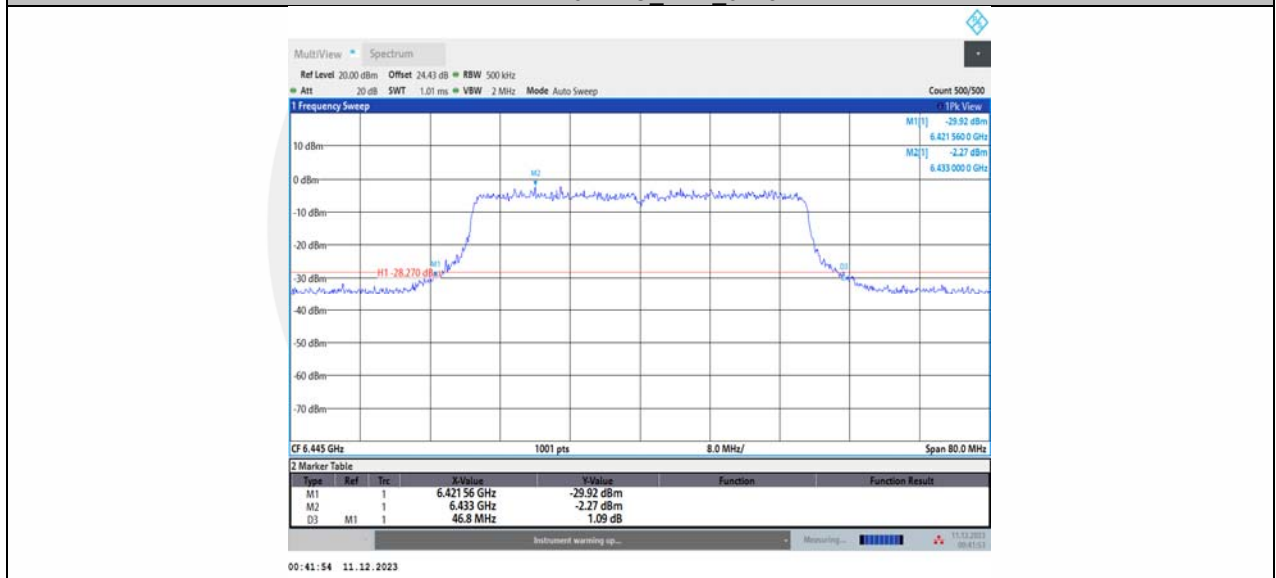


11AX40MIMO\_Ant2\_6485

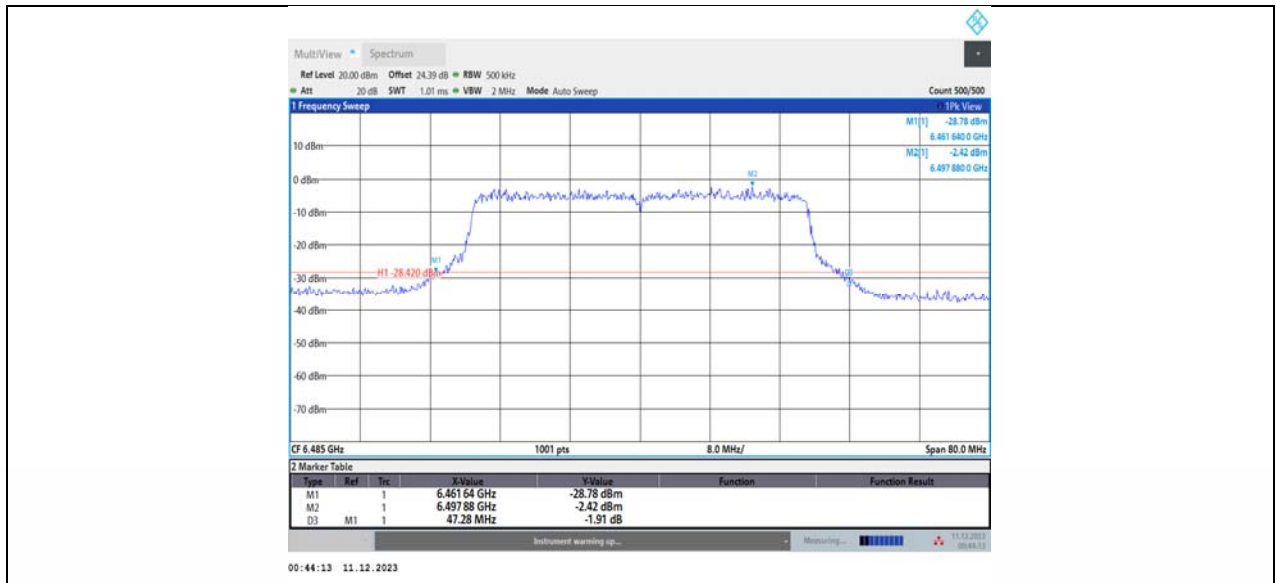


11AX40MIMO\_Ant1\_6485

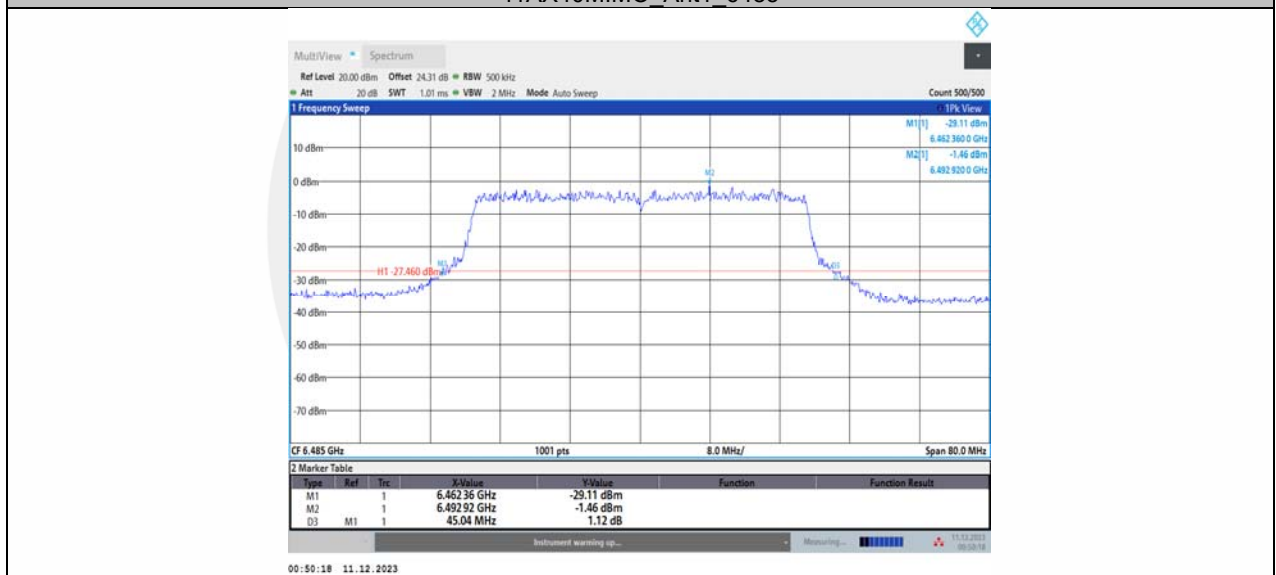


11AX40MIMO\_Ant2\_6525

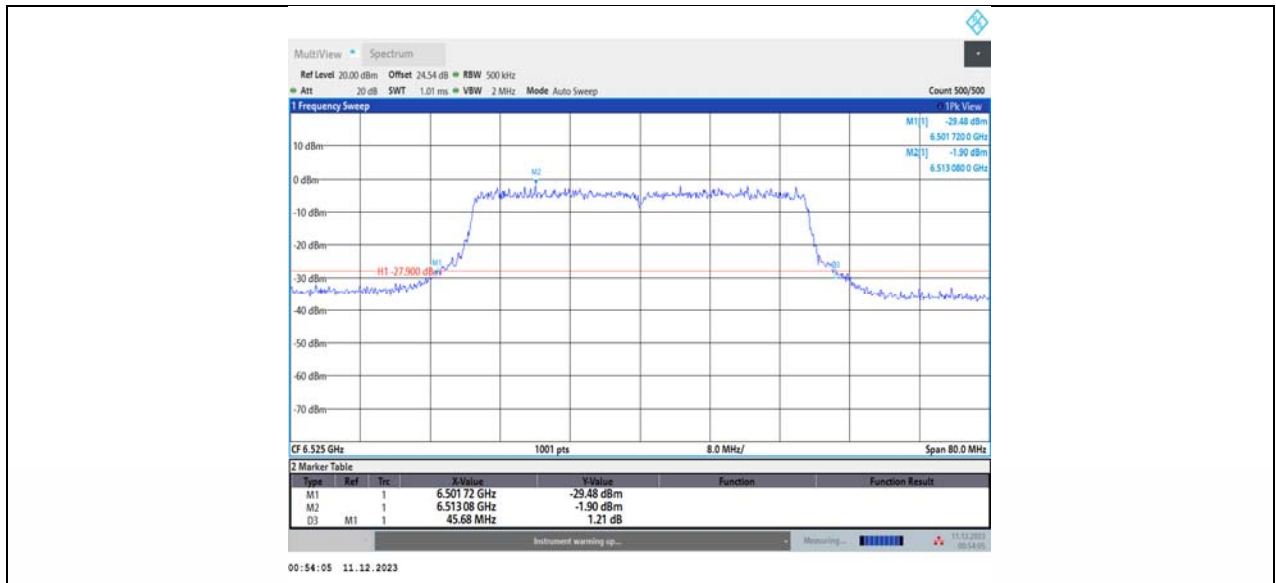


11AX40MIMO\_Ant1\_6525

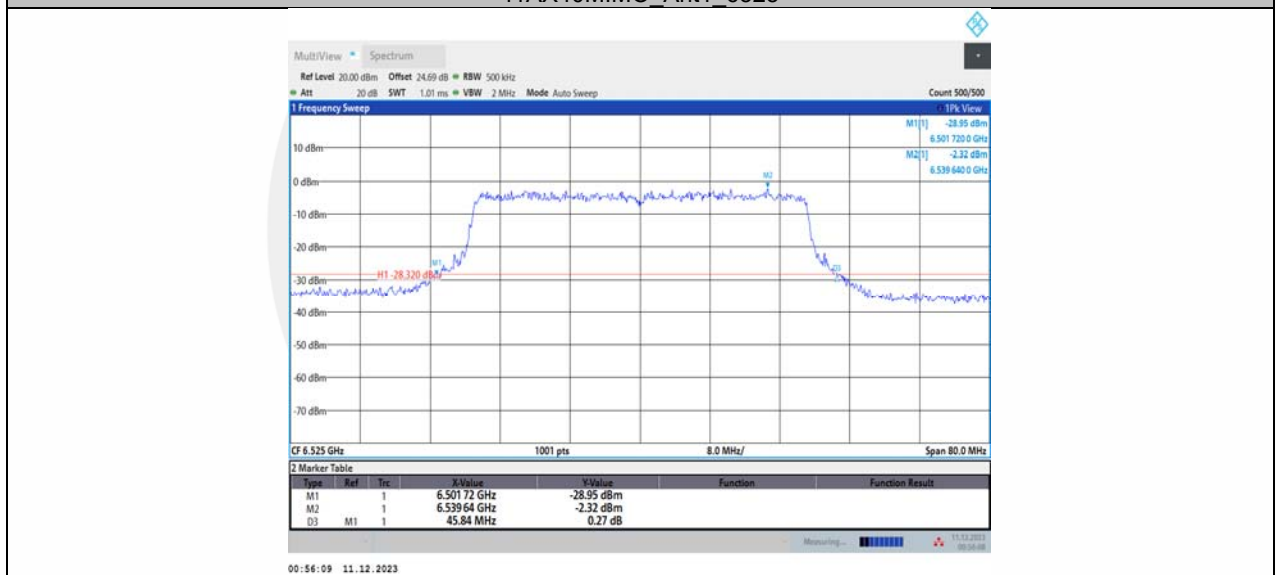

11AX40MIMO\_Ant2\_6565

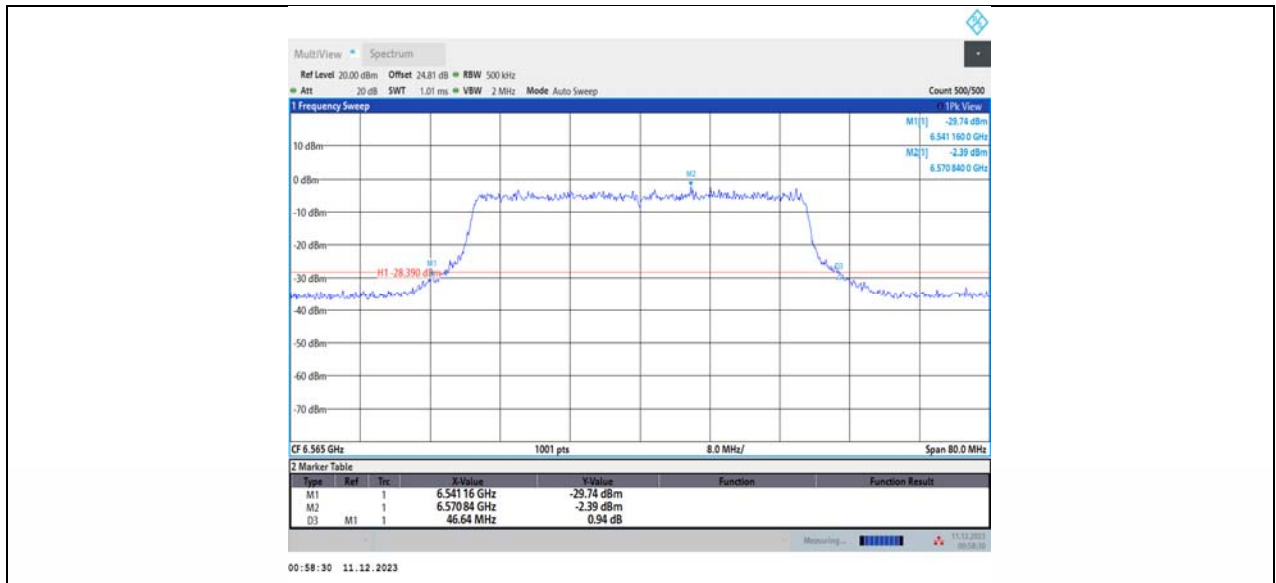


11AX40MIMO\_Ant1\_6565

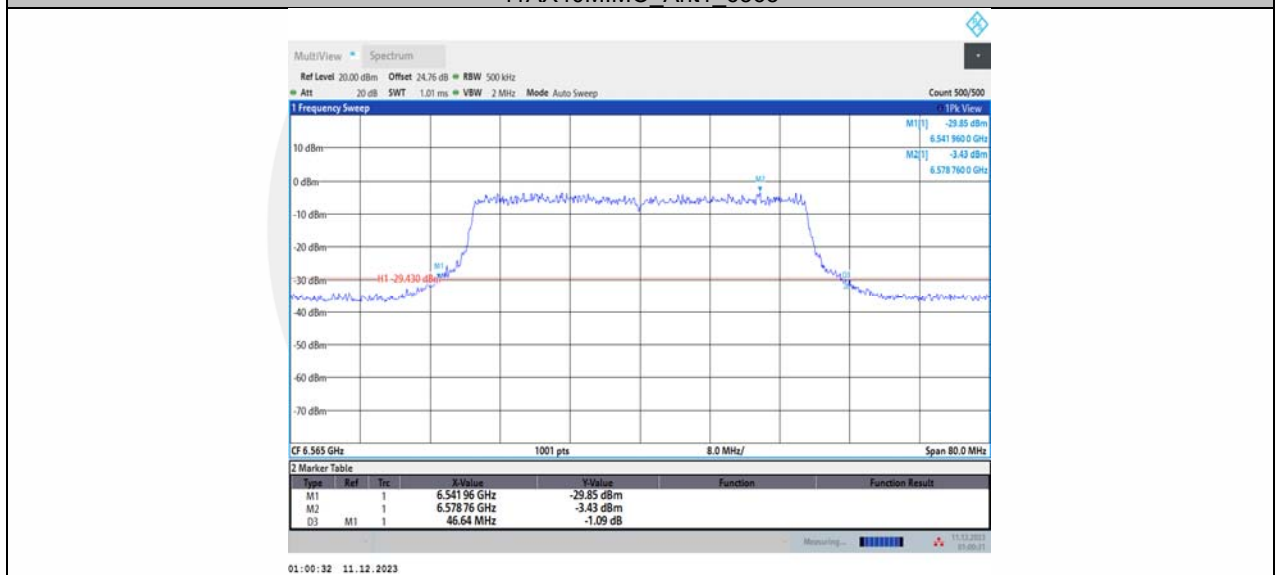


11AX40MIMO\_Ant2\_6685



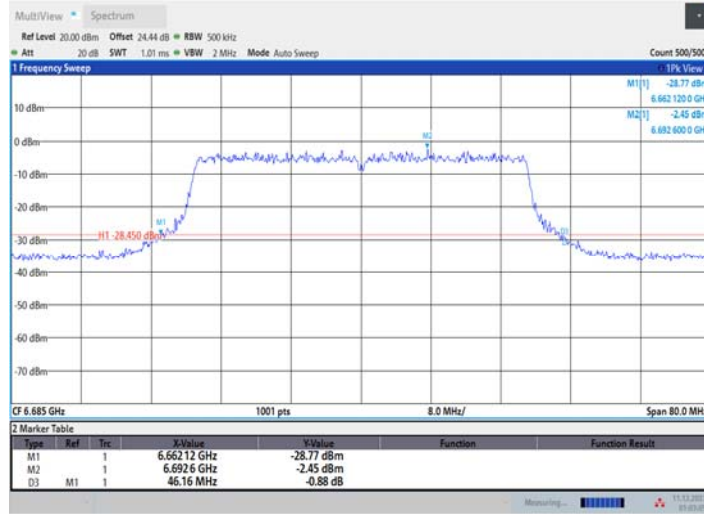


11AX40MIMO\_Ant1\_6685

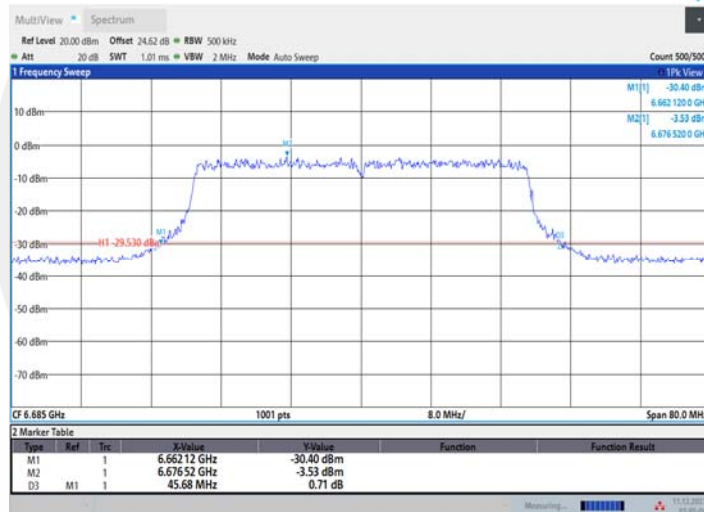

11AX40MIMO\_Ant2\_6845




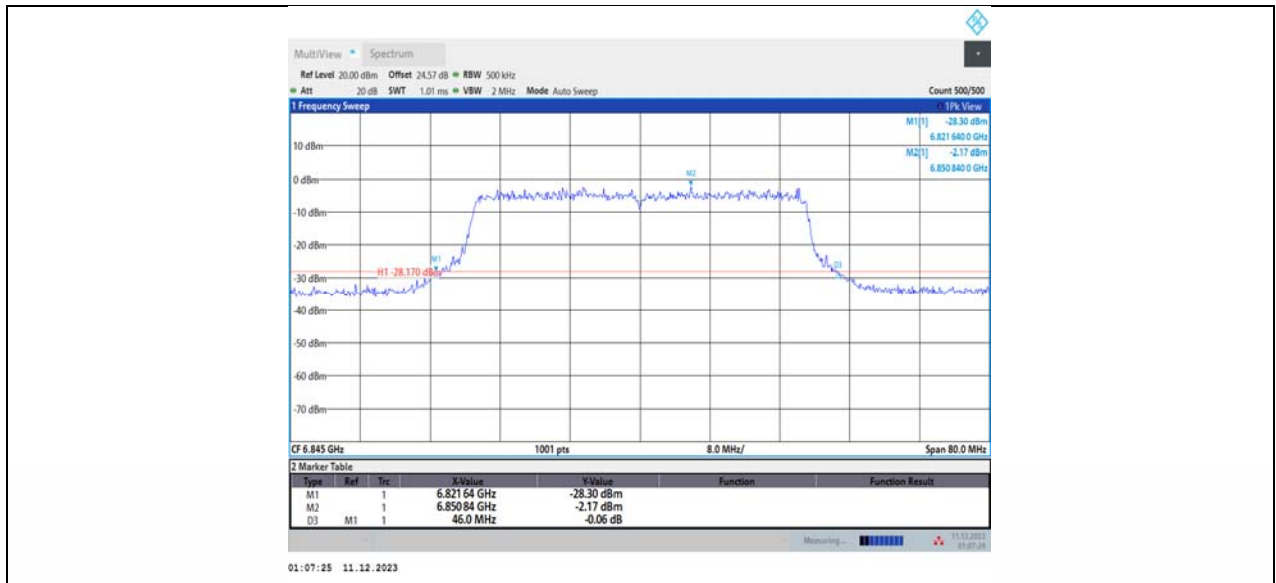

11AX40MIMO\_Ant1\_6845




11AX40MIMO\_Ant2\_6885

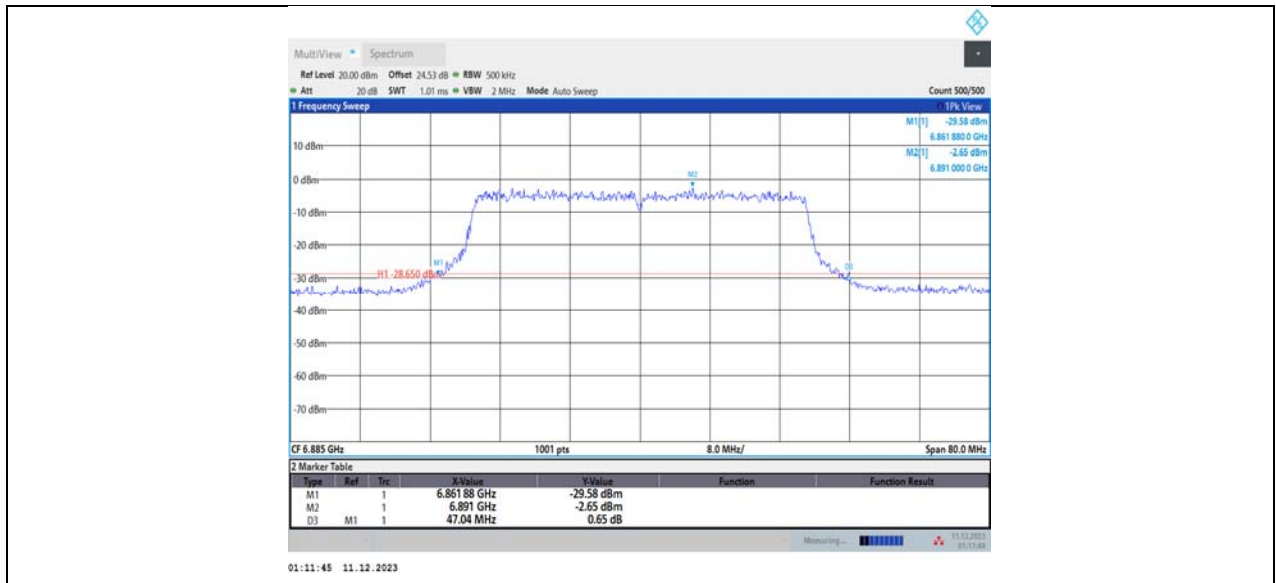

11AX40MIMO\_Ant1\_6885




11AX40MIMO\_Ant2\_6925

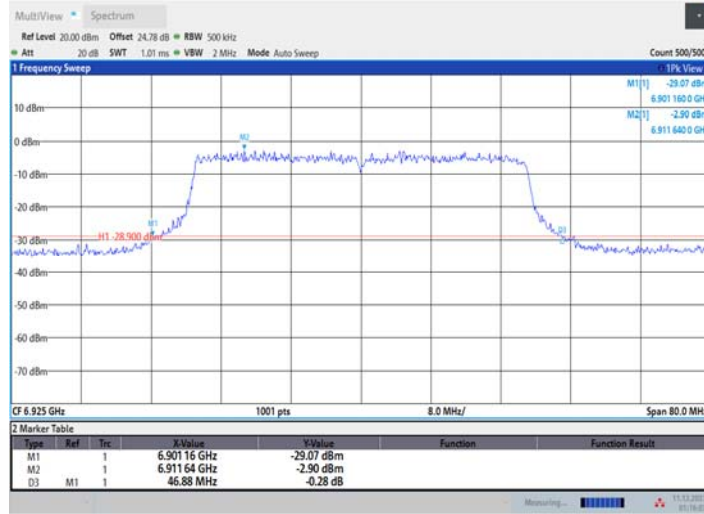


01:16:03 11.12.2023

11AX40MIMO\_Ant1\_6925

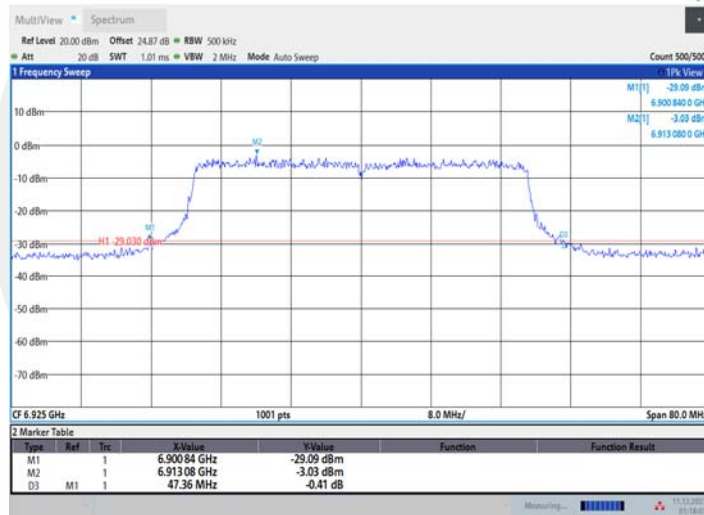


01:18:04 11.12.2023


11AX40MIMO\_Ant2\_6965

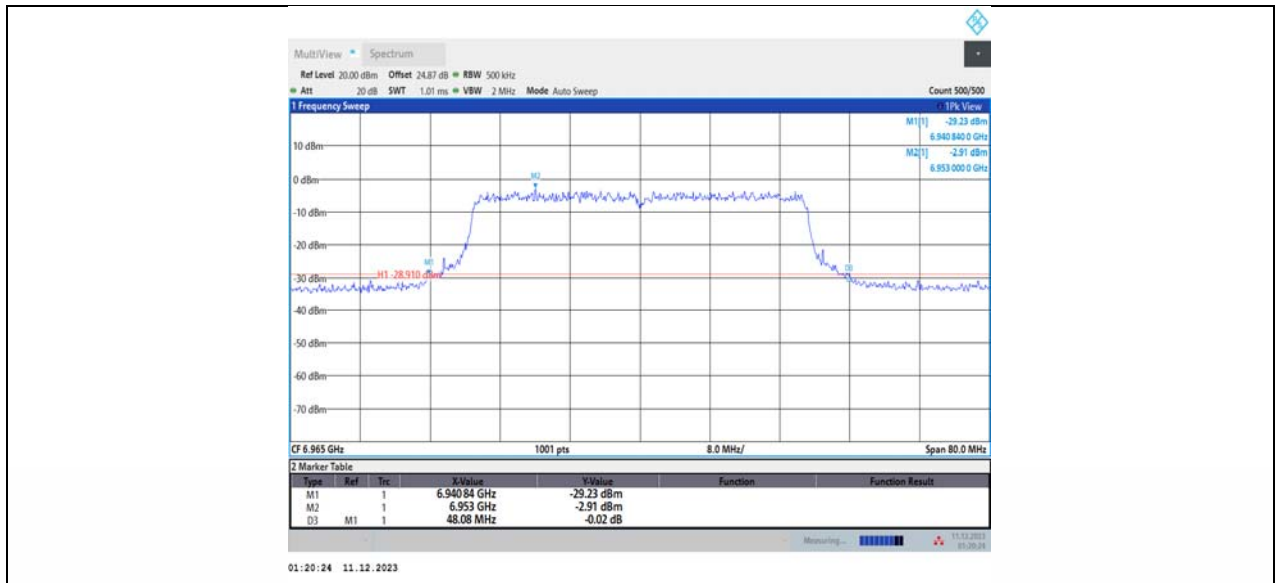


11AX40MIMO\_Ant1\_6965

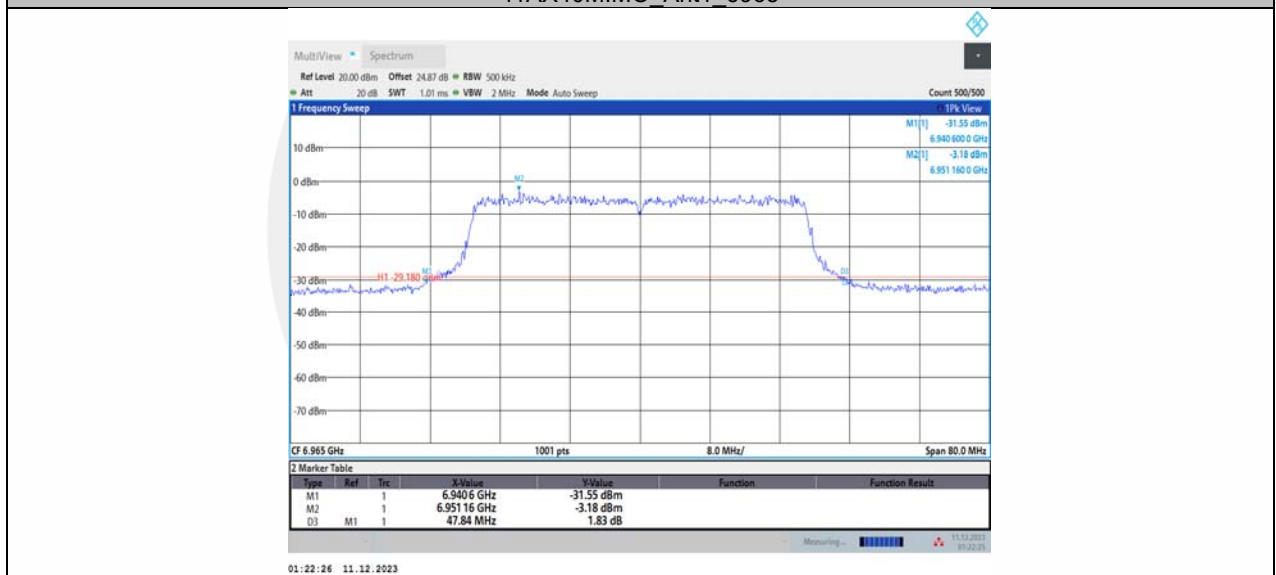


11AX40MIMO\_Ant2\_7085

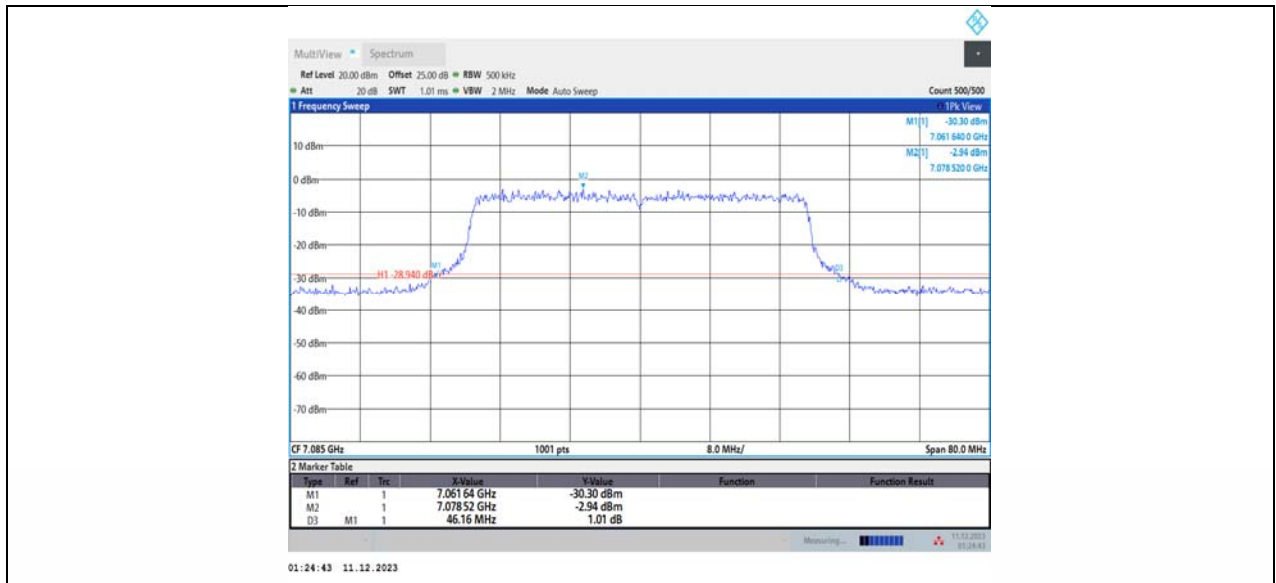


11AX40MIMO\_Ant1\_7085

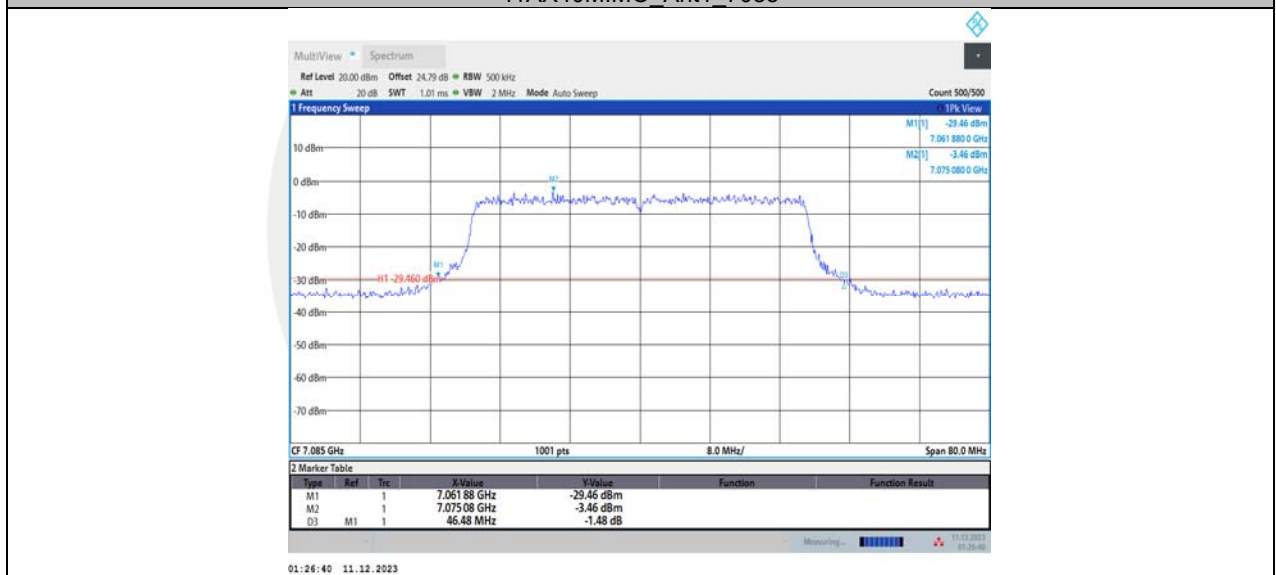


11AX80MIMO\_Ant2\_5985

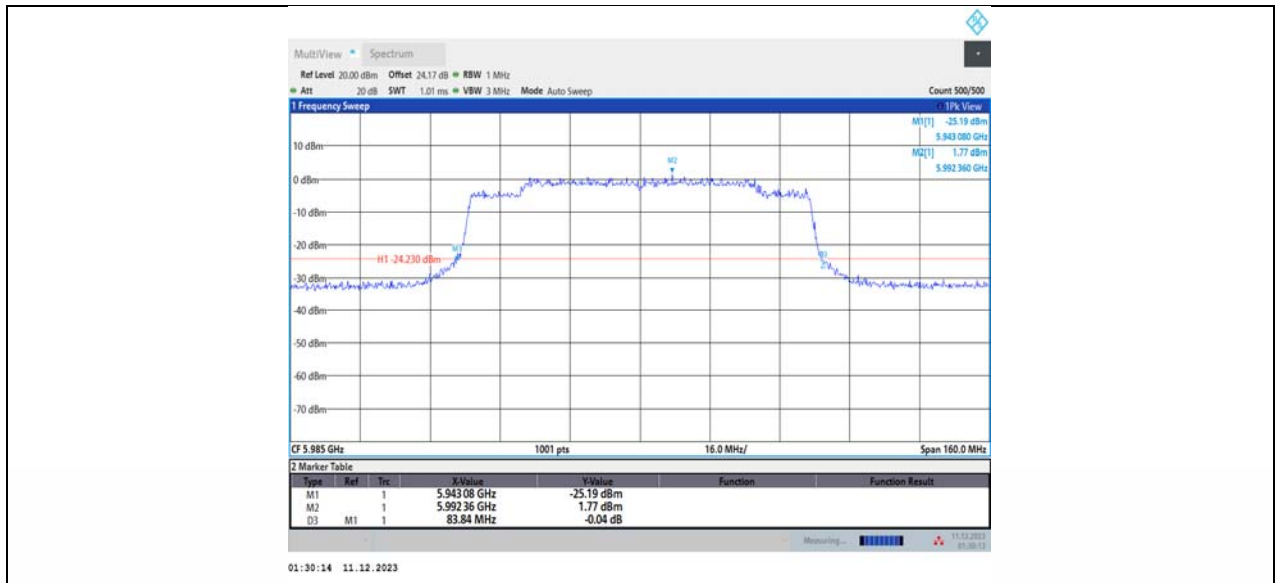


11AX80MIMO\_Ant1\_5985

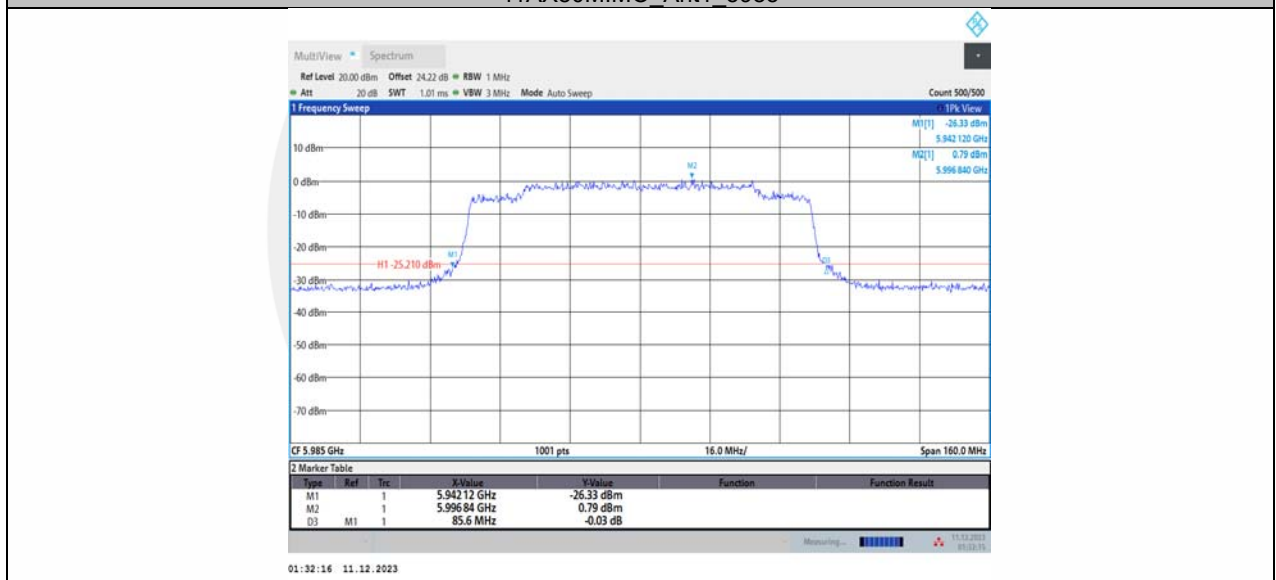

11AX80MIMO\_Ant2\_6145

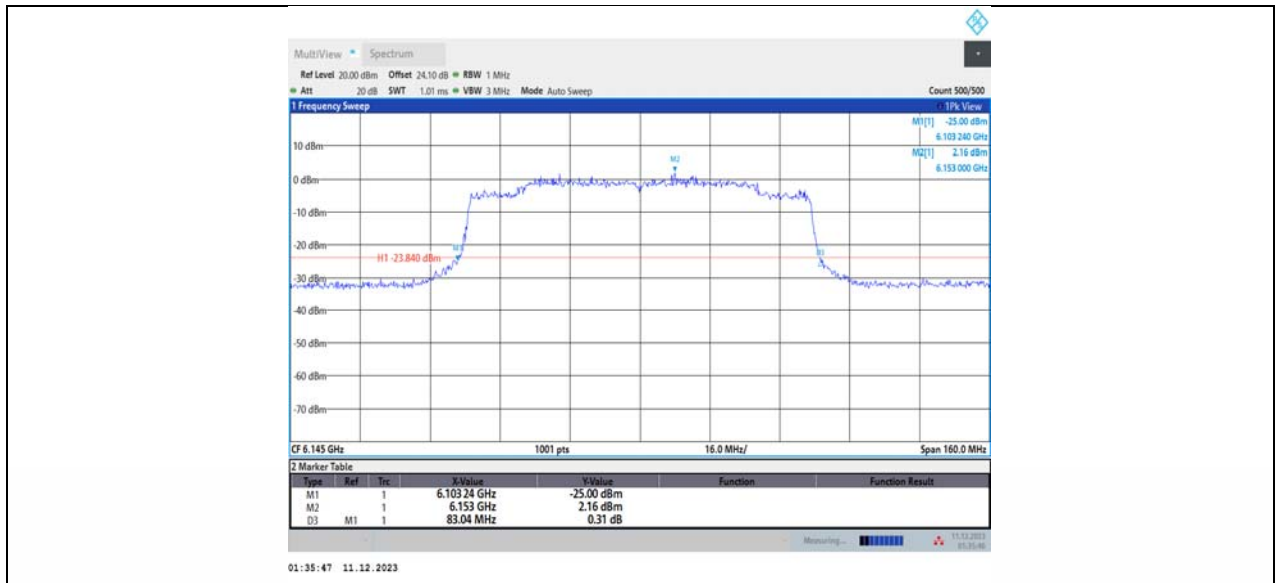


11AX80MIMO\_Ant1\_6145

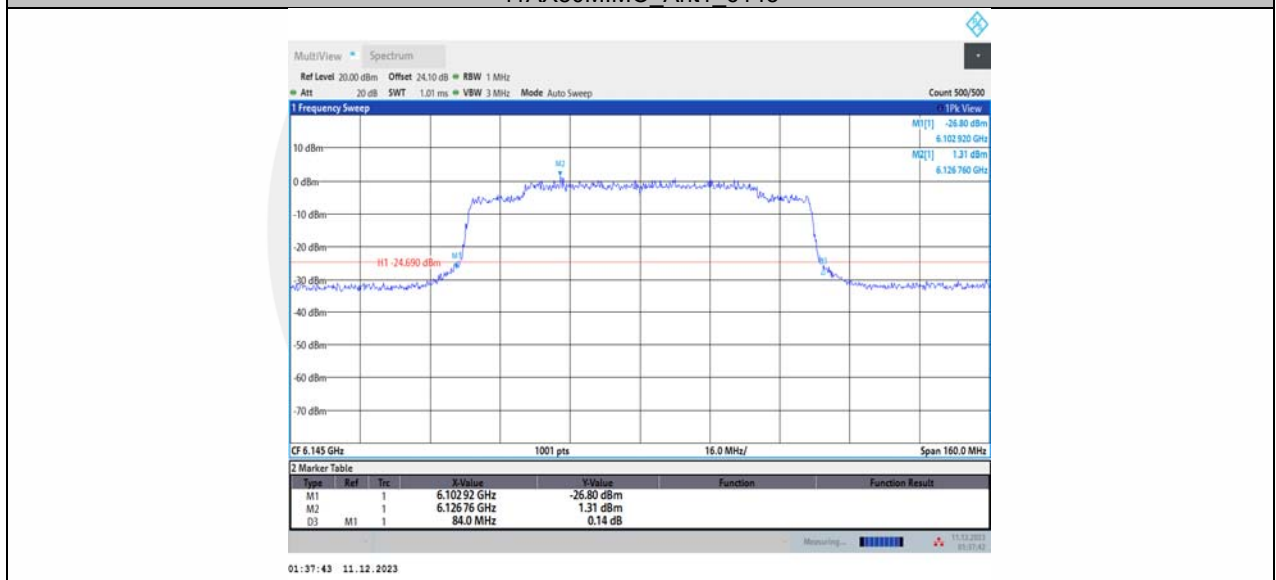


11AX80MIMO\_Ant2\_6385



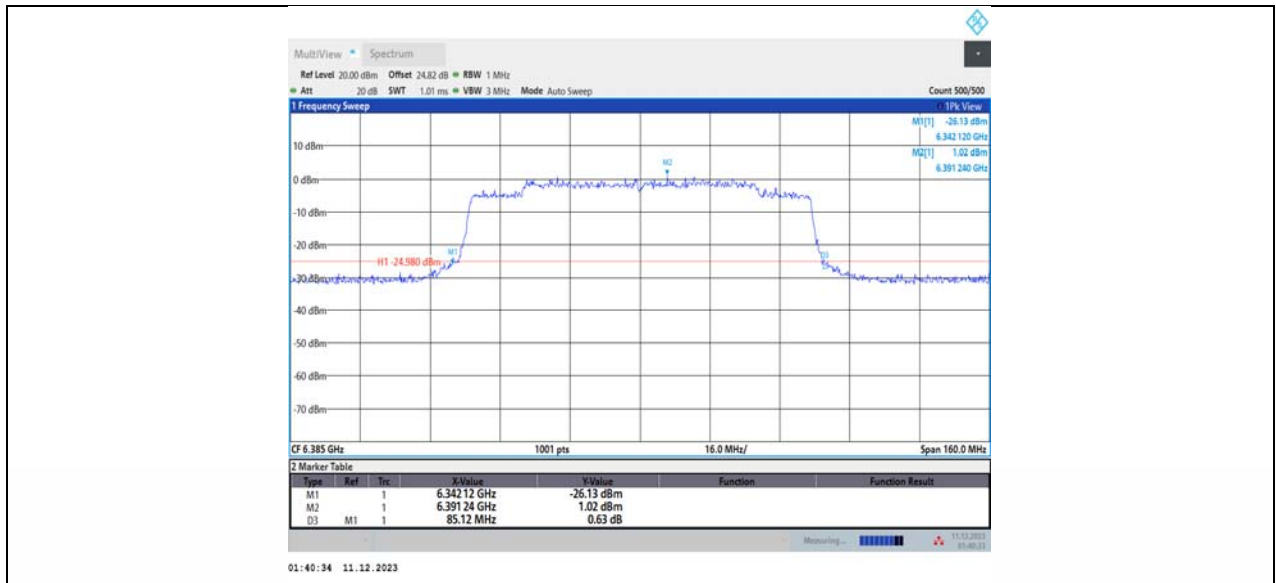


11AX80MIMO\_Ant1\_6385

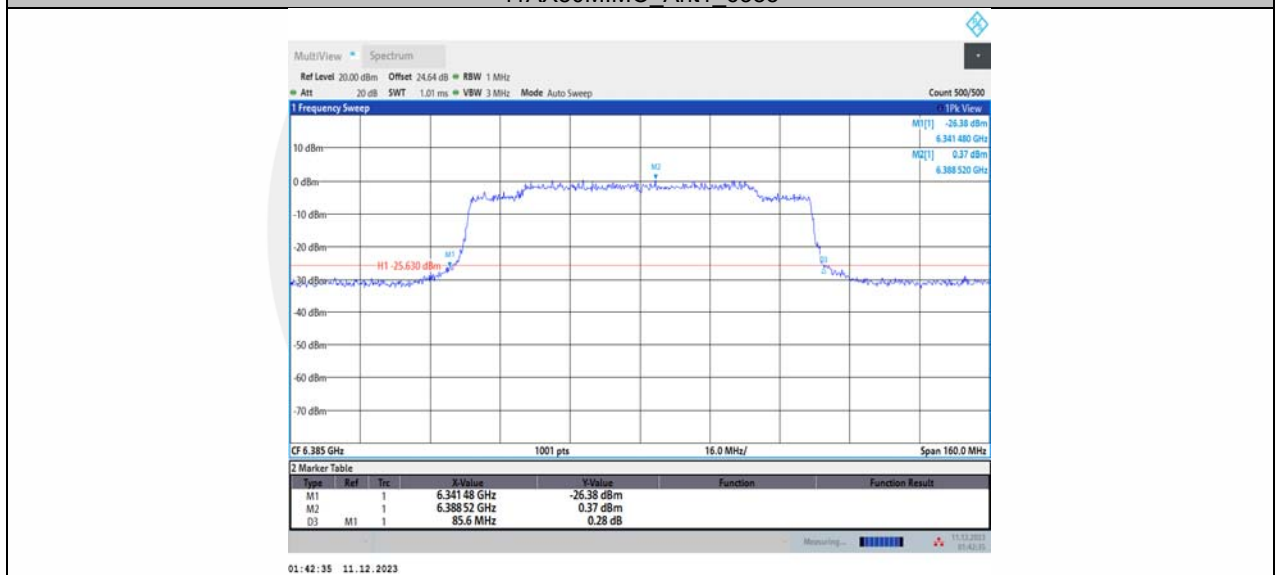


11AX80MIMO\_Ant2\_6465




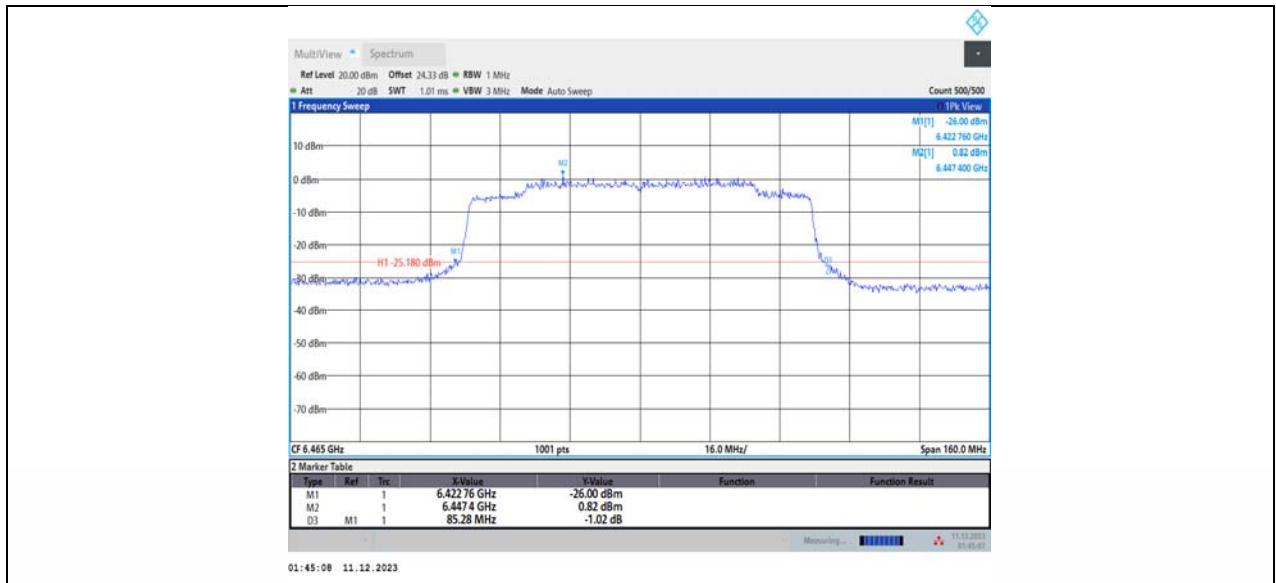


11AX80MIMO\_Ant1\_6465

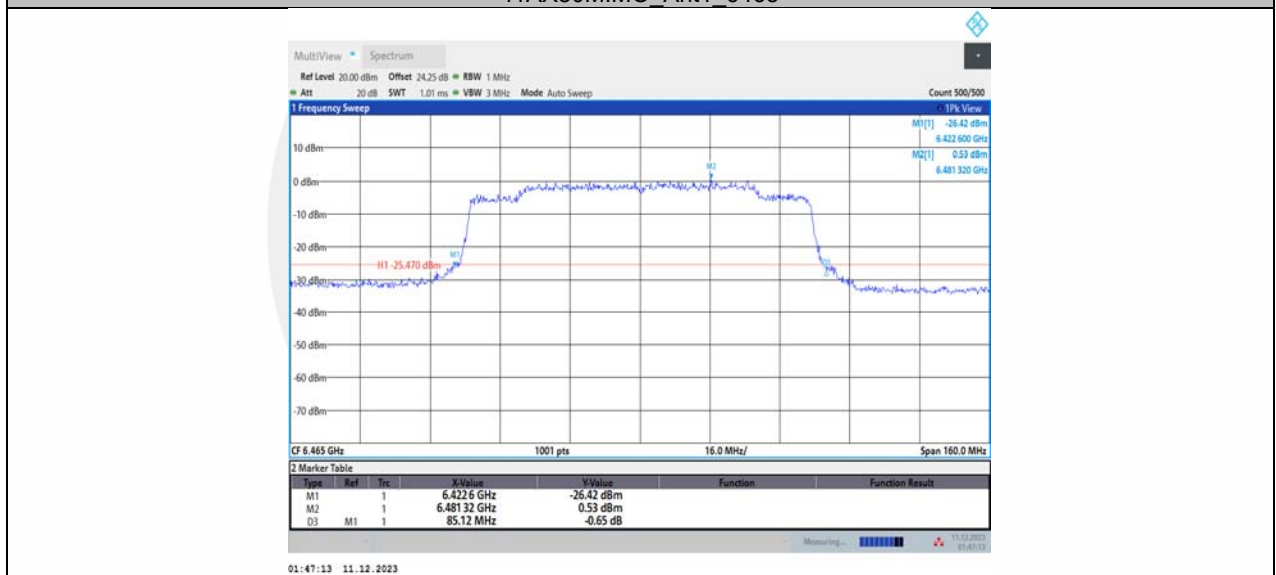


11AX80MIMO\_Ant2\_6545

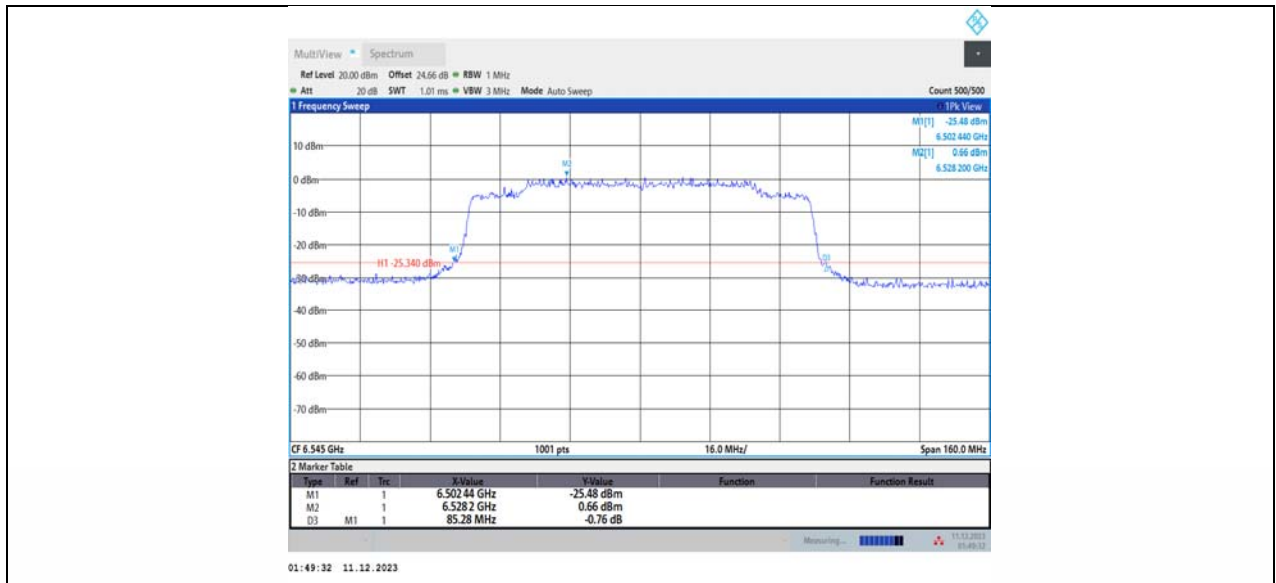


11AX80MIMO\_Ant1\_6545

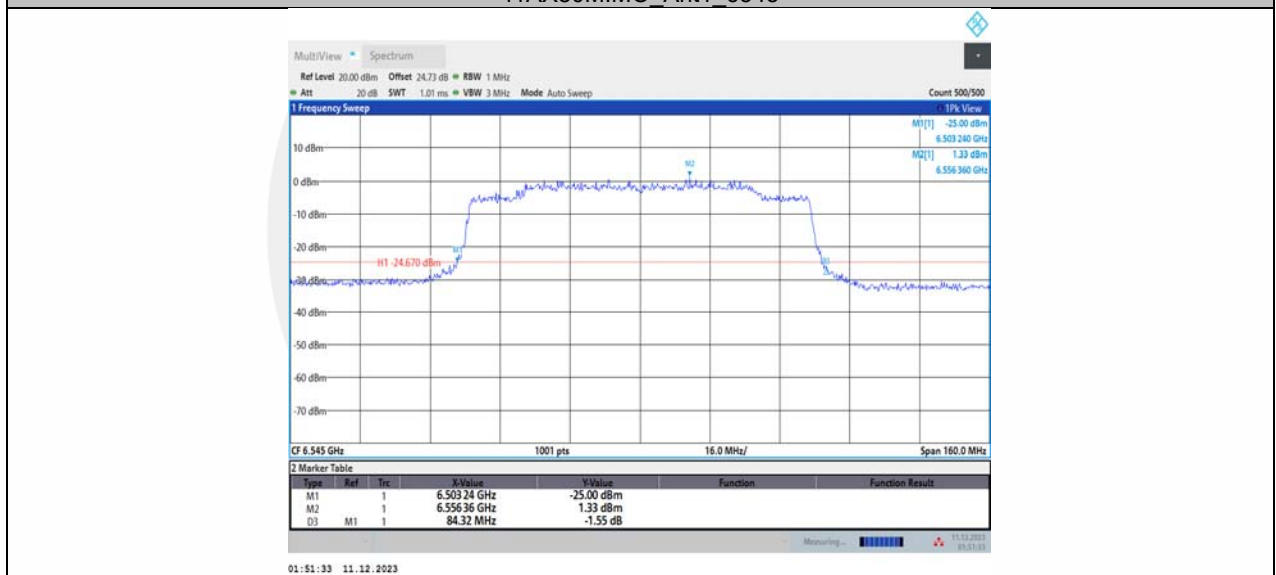


11AX80MIMO\_Ant2\_6625

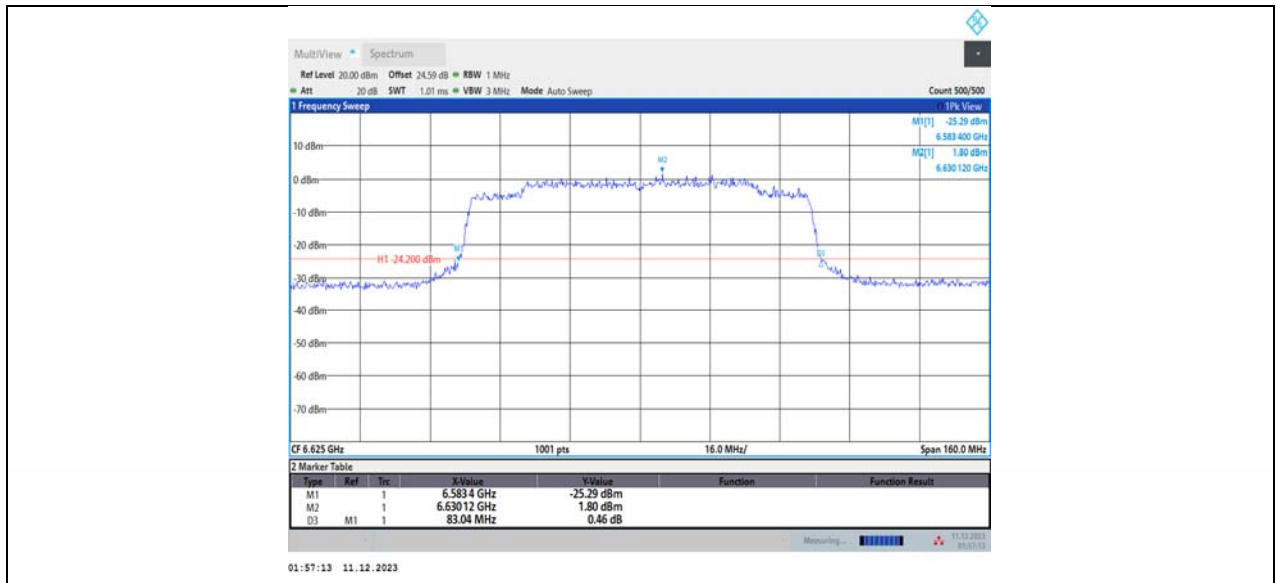


11AX80MIMO\_Ant1\_6625

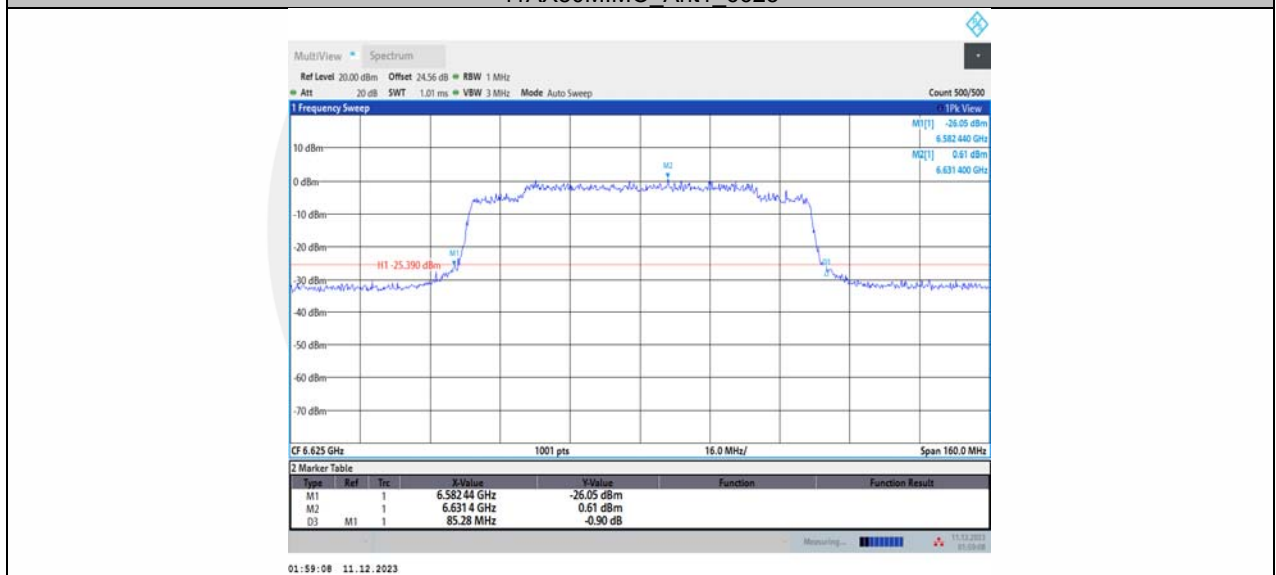


11AX80MIMO\_Ant2\_6705

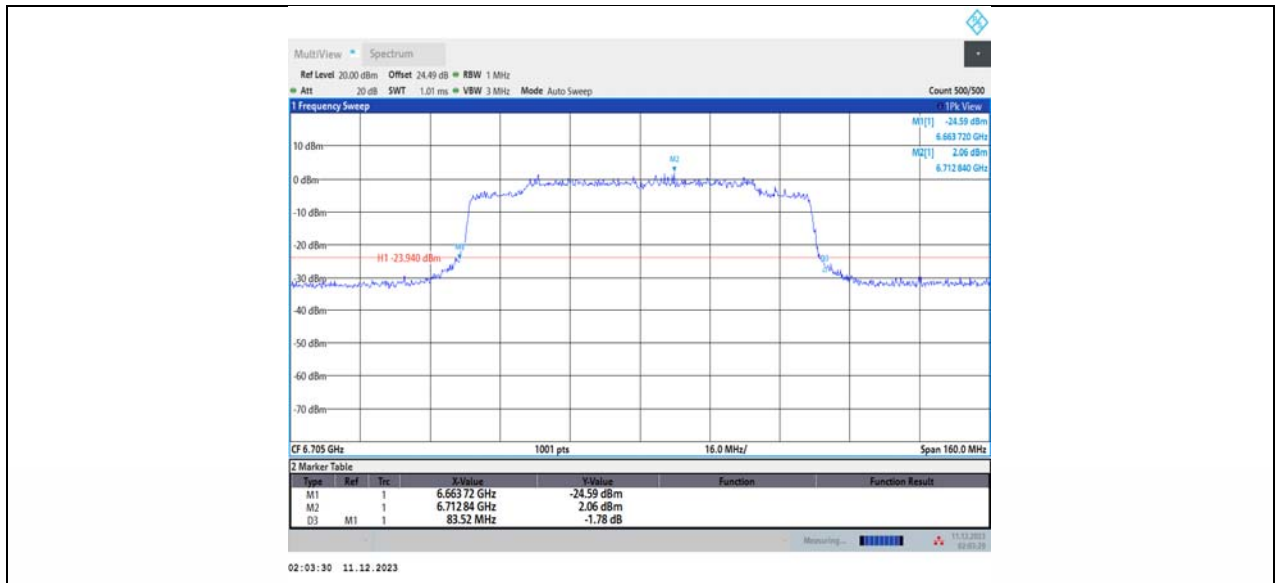


11AX80MIMO\_Ant1\_6705

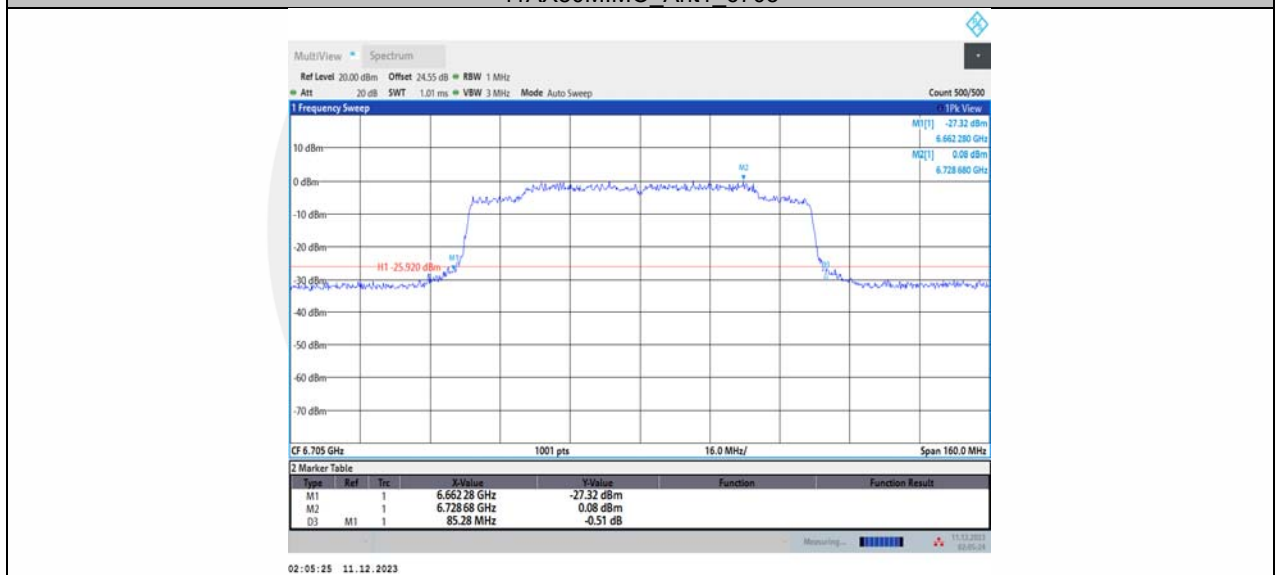


11AX80MIMO\_Ant2\_6785

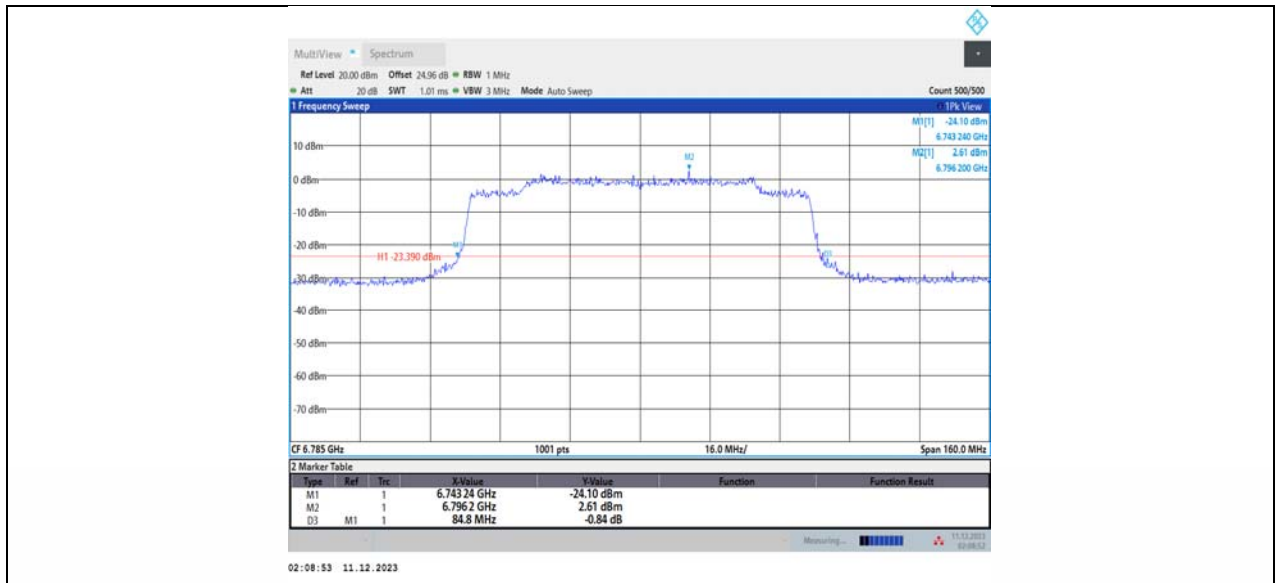


11AX80MIMO\_Ant1\_6785

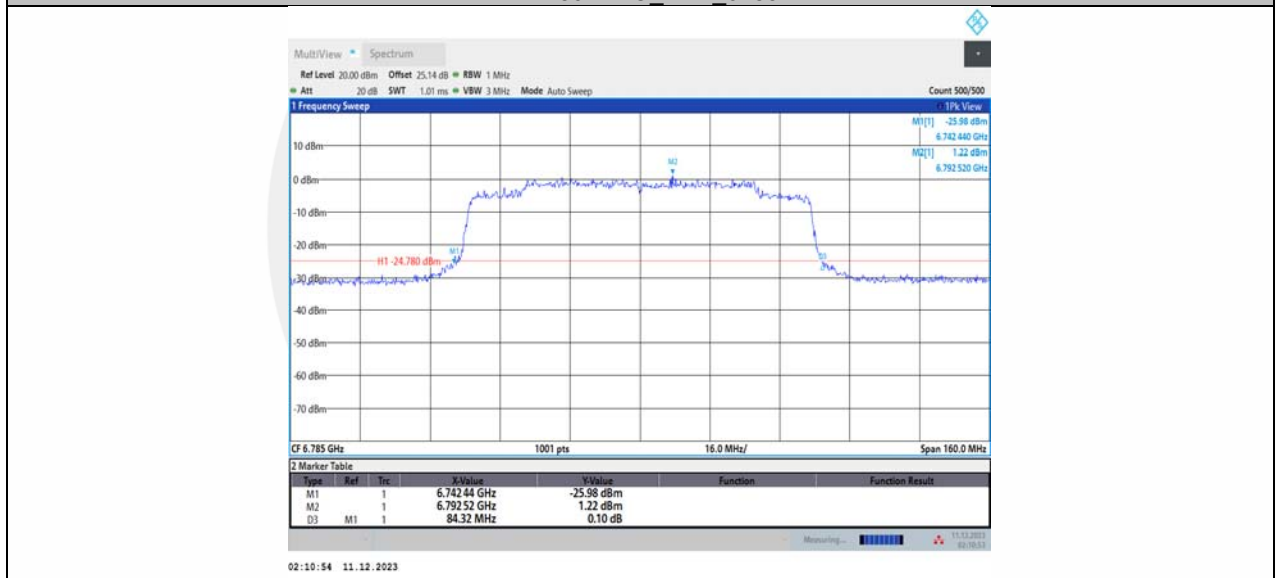


11AX80MIMO\_Ant2\_6865

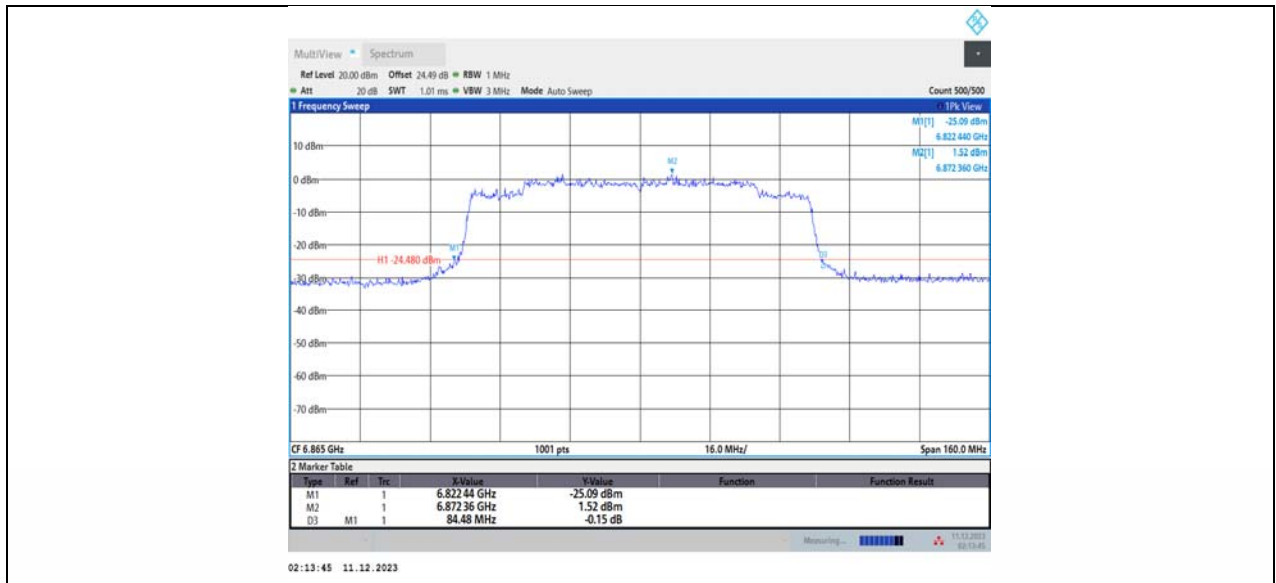


11AX80MIMO\_Ant1\_6865

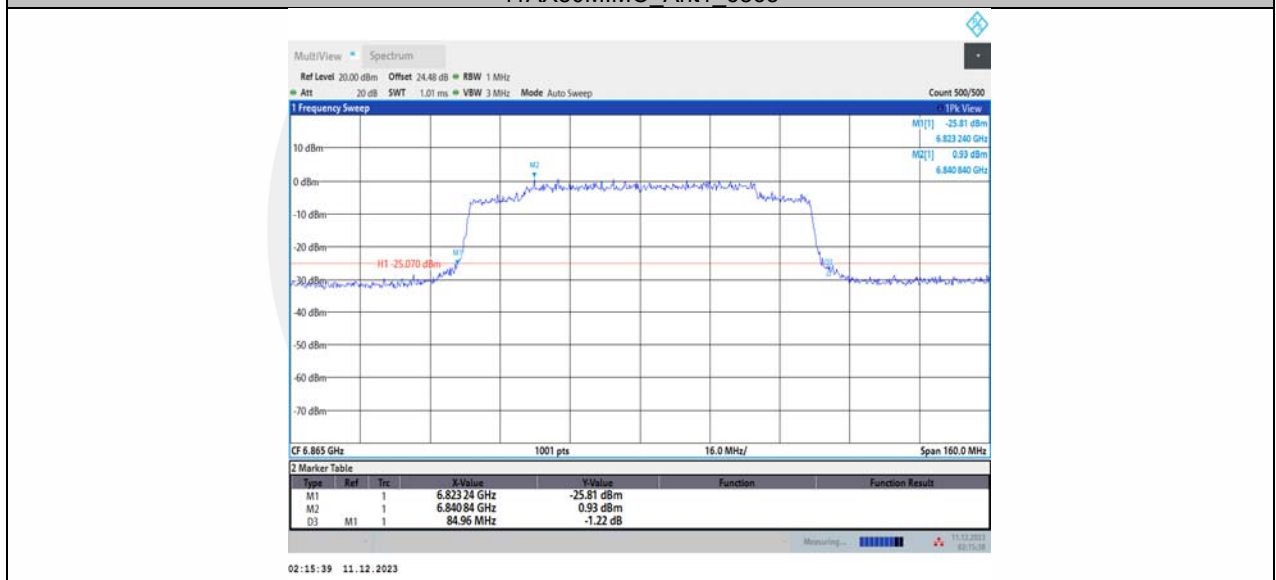

11AX80MIMO\_Ant2\_6945

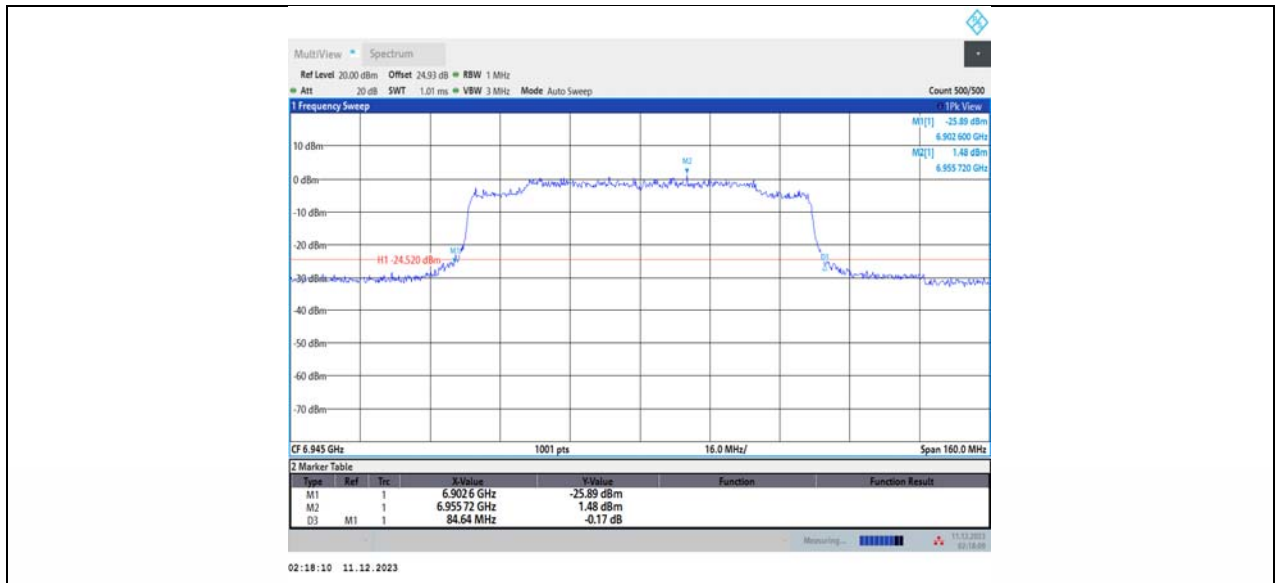


11AX80MIMO\_Ant1\_6945

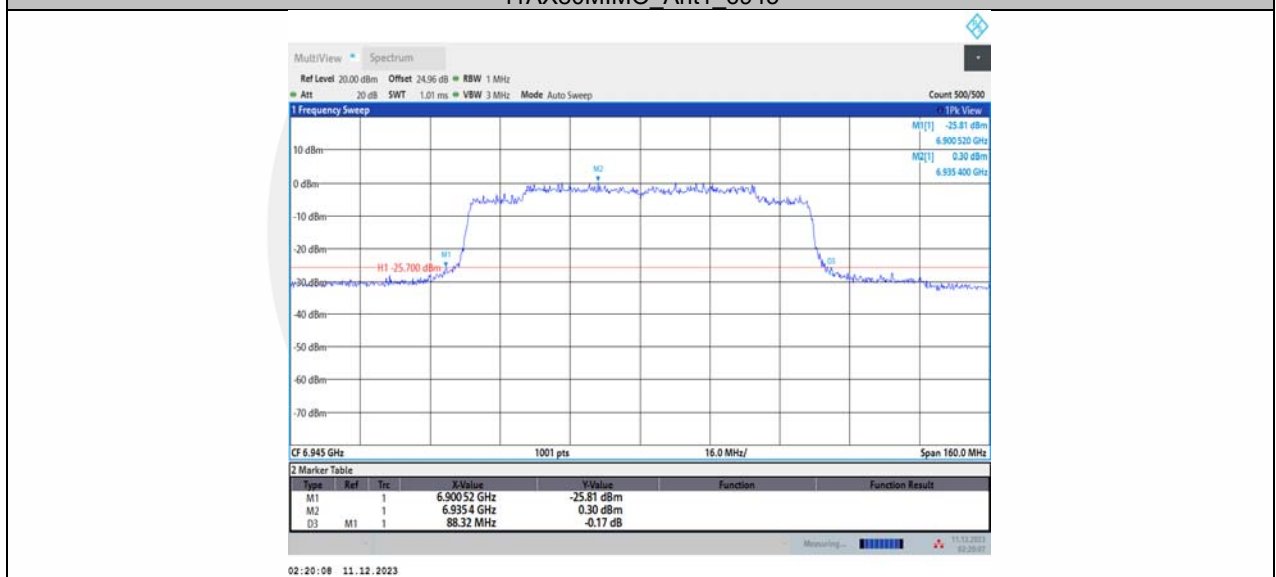


11AX80MIMO\_Ant2\_7025



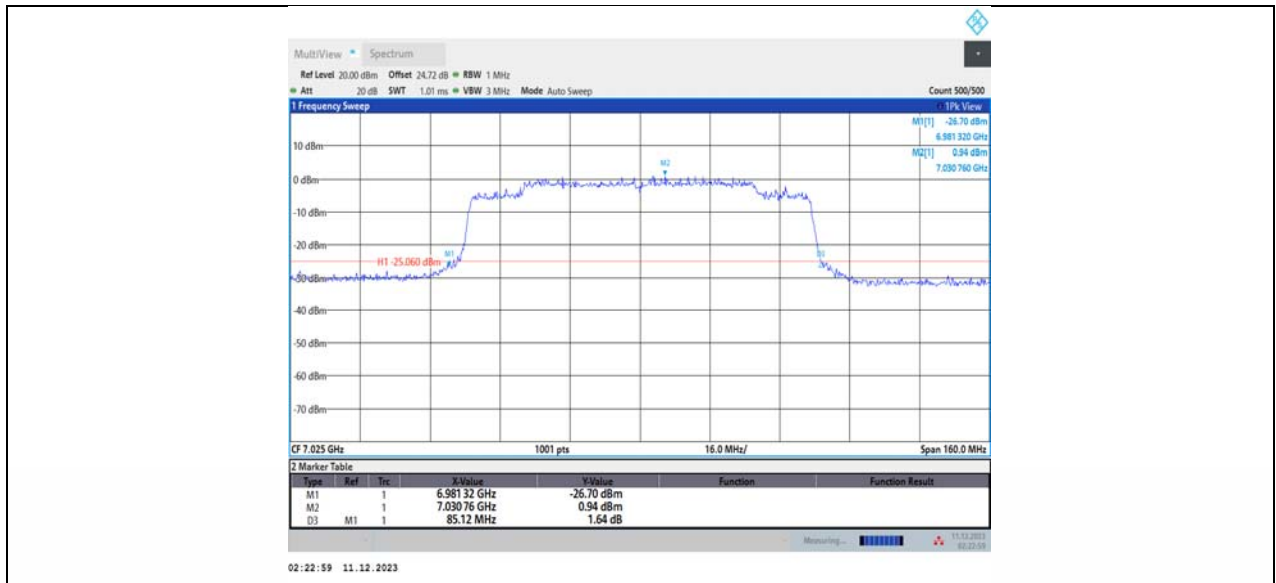


11AX80MIMO\_Ant1\_7025

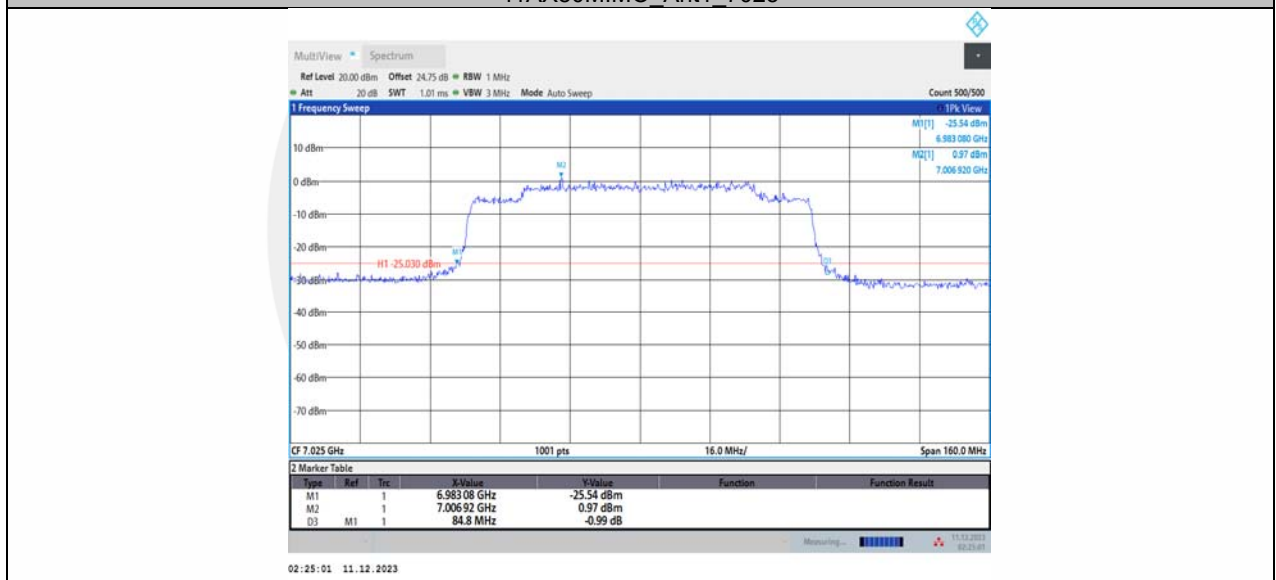


11AX160MIMO\_Ant2\_6025




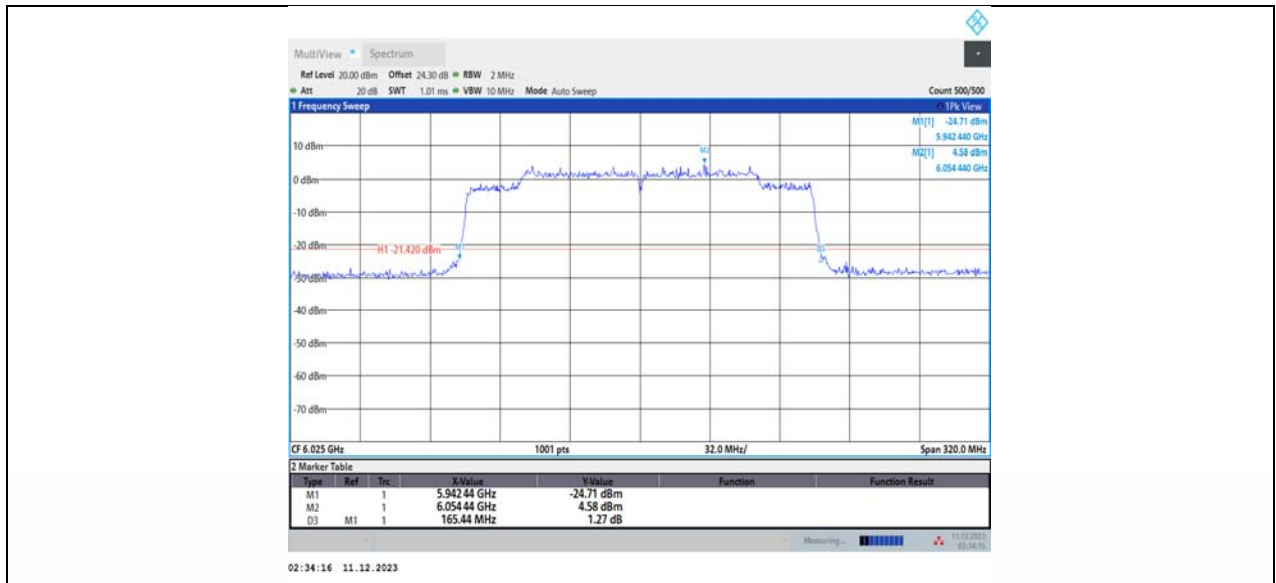


11AX160MIMO\_Ant1\_6025

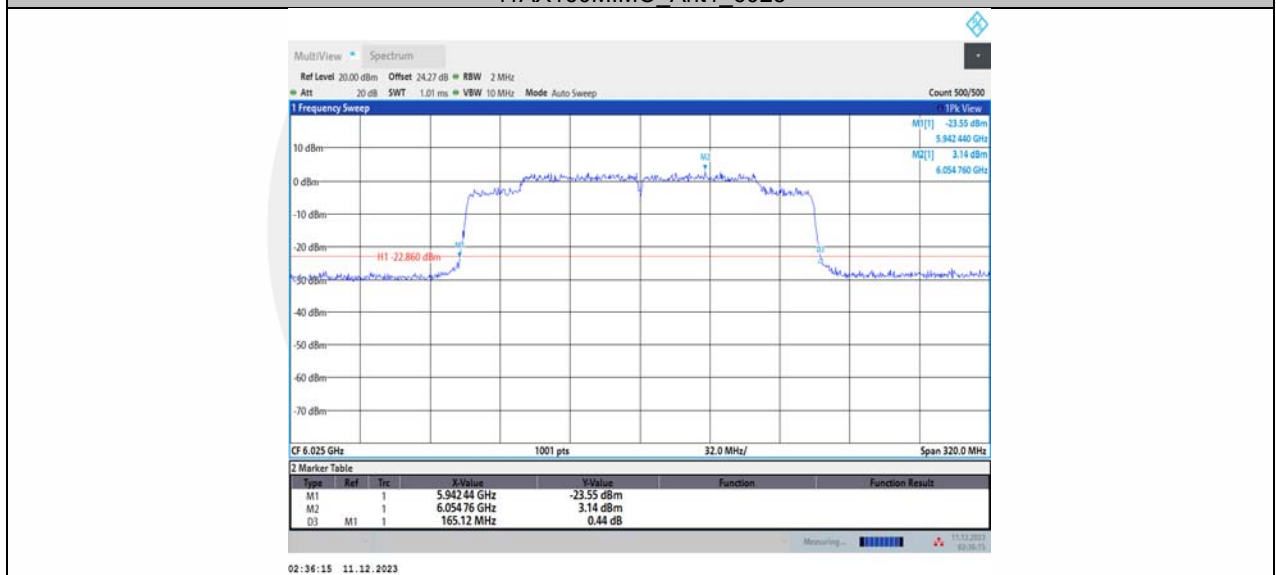


11AX160MIMO\_Ant2\_6185

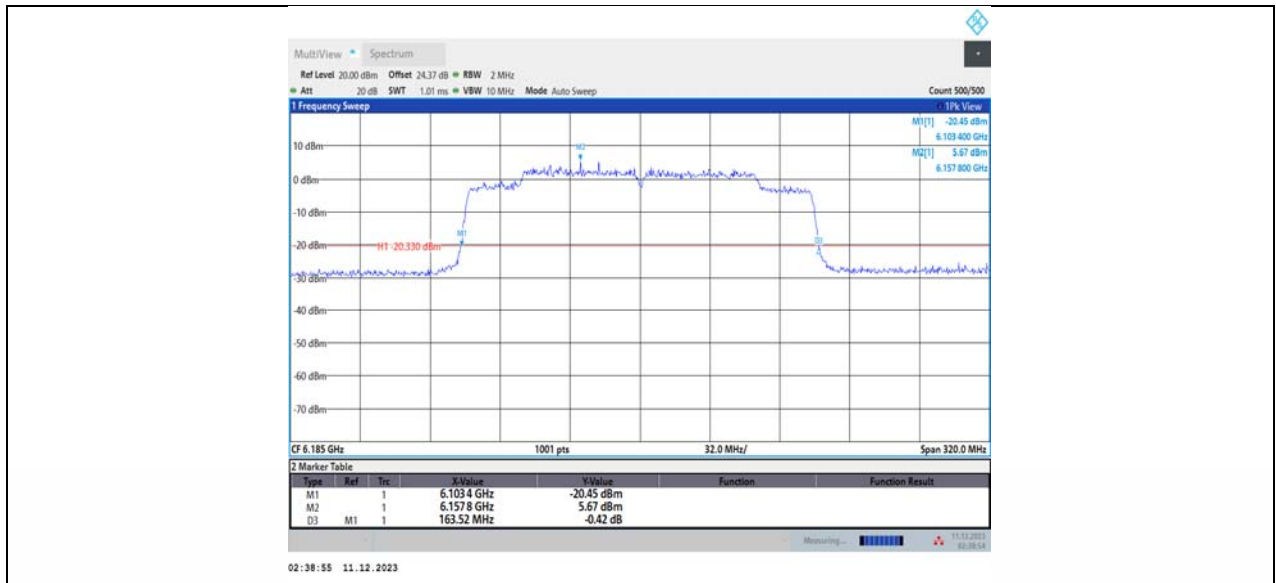


11AX160MIMO\_Ant1\_6185

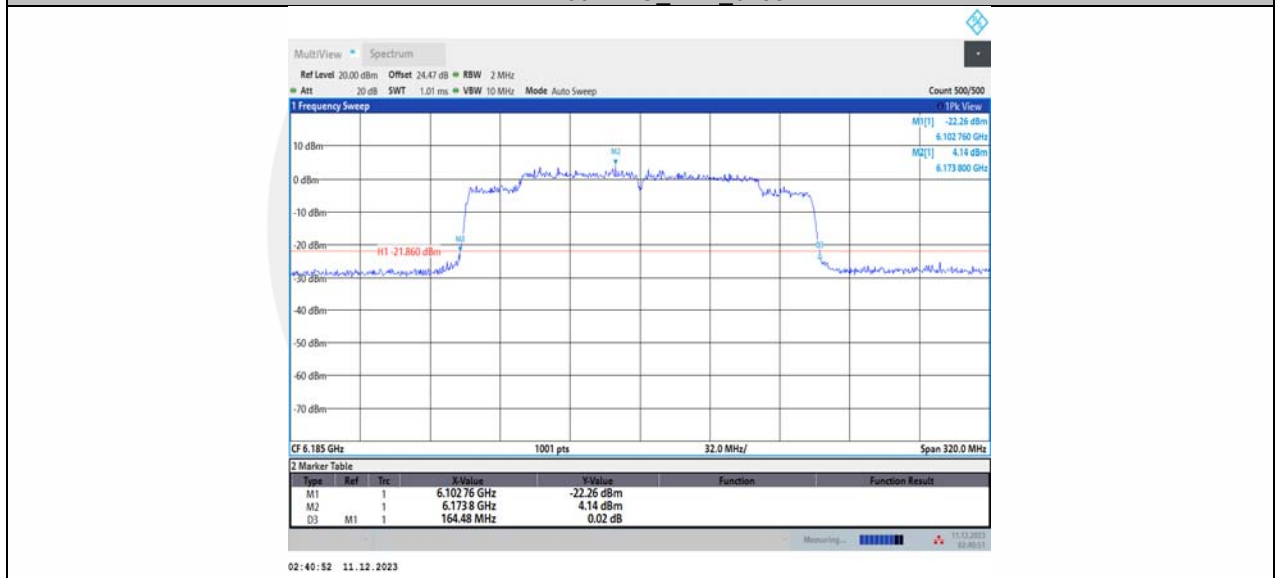


11AX160MIMO\_Ant2\_6345

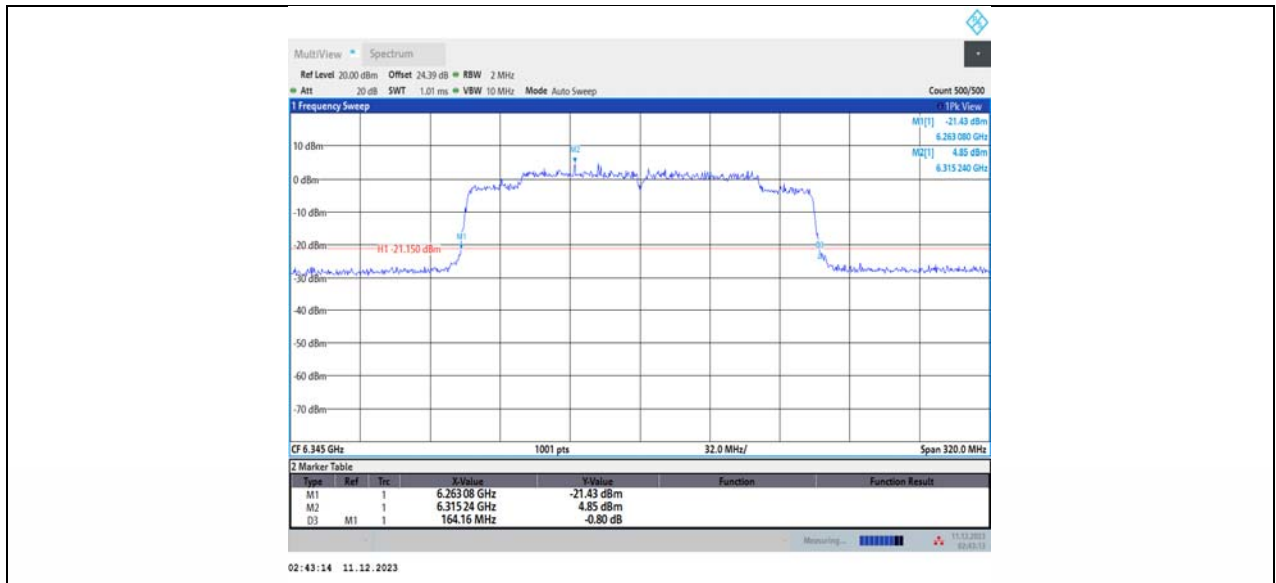


11AX160MIMO\_Ant1\_6345

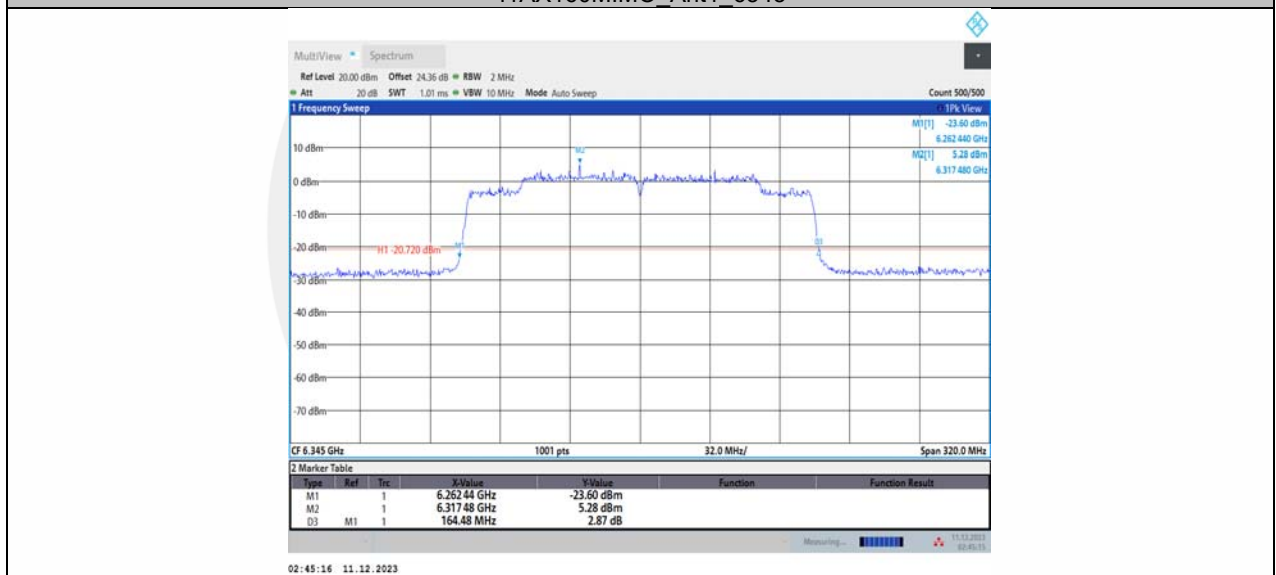


11AX160MIMO\_Ant2\_6505

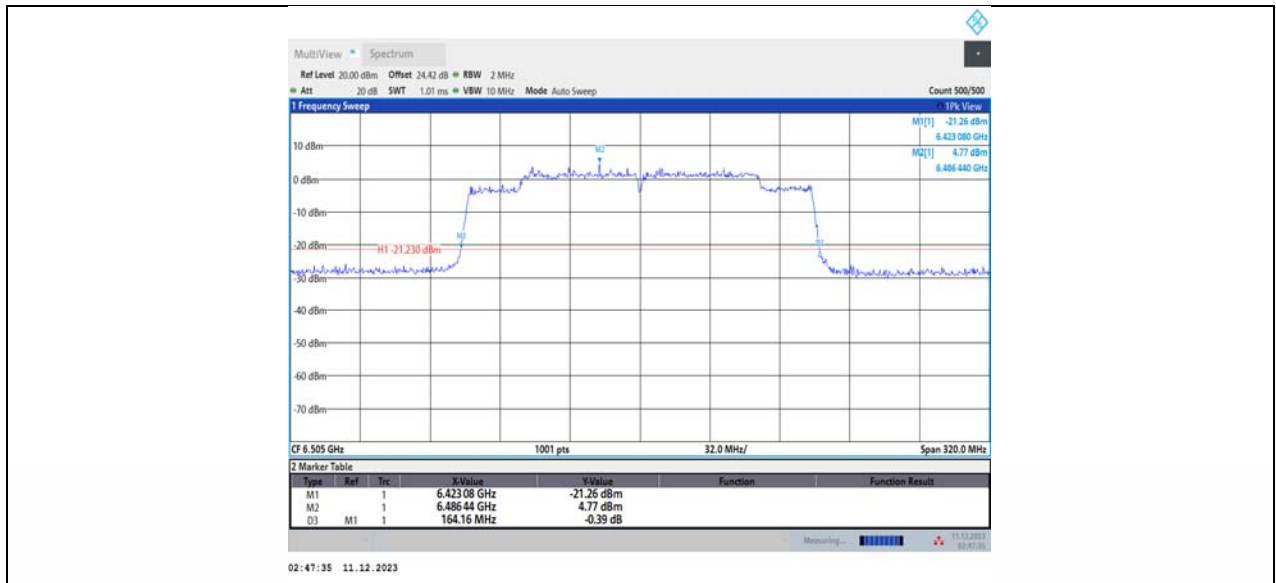

11AX160MIMO\_Ant1\_6505

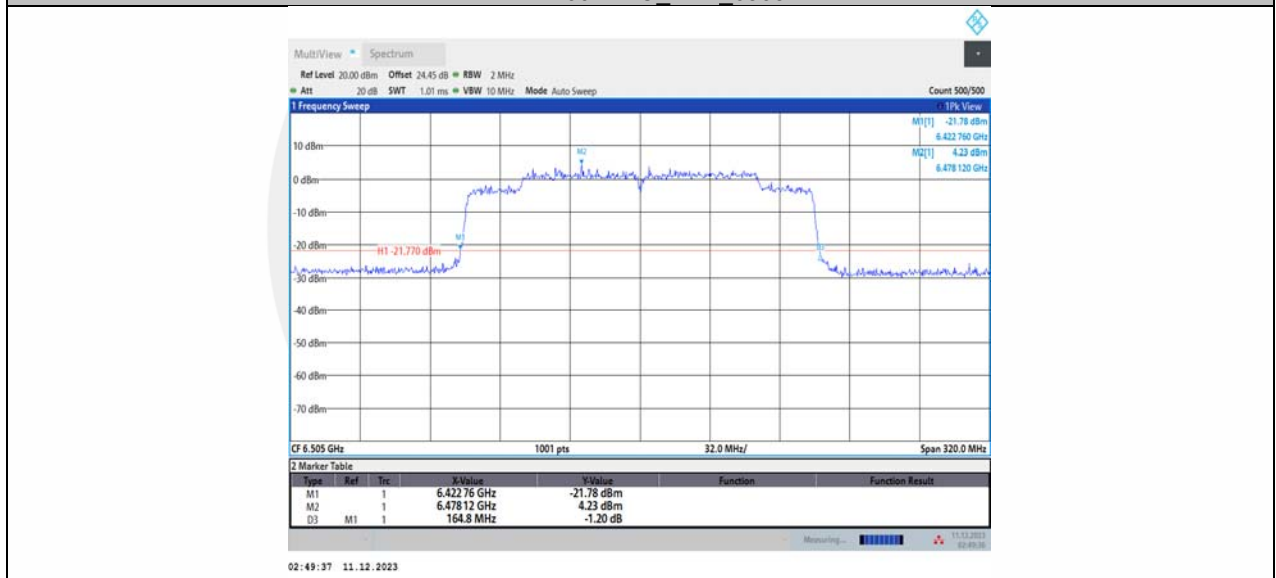


11AX160MIMO\_Ant2\_6665

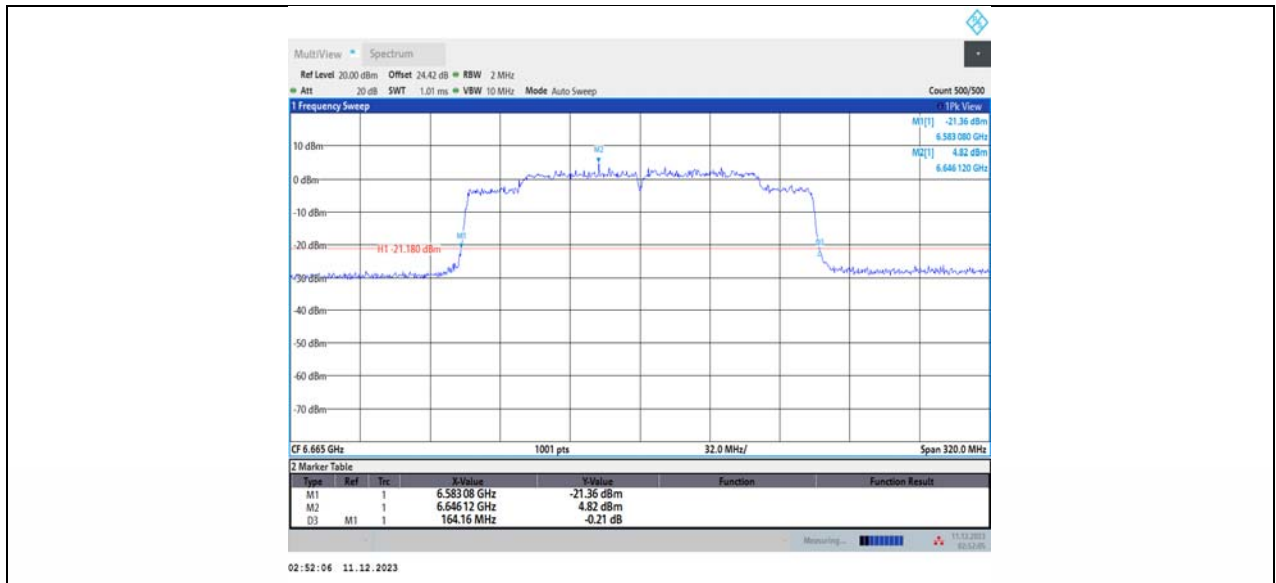

11AX160MIMO\_Ant1\_6665




11AX160MIMO\_Ant2\_6825

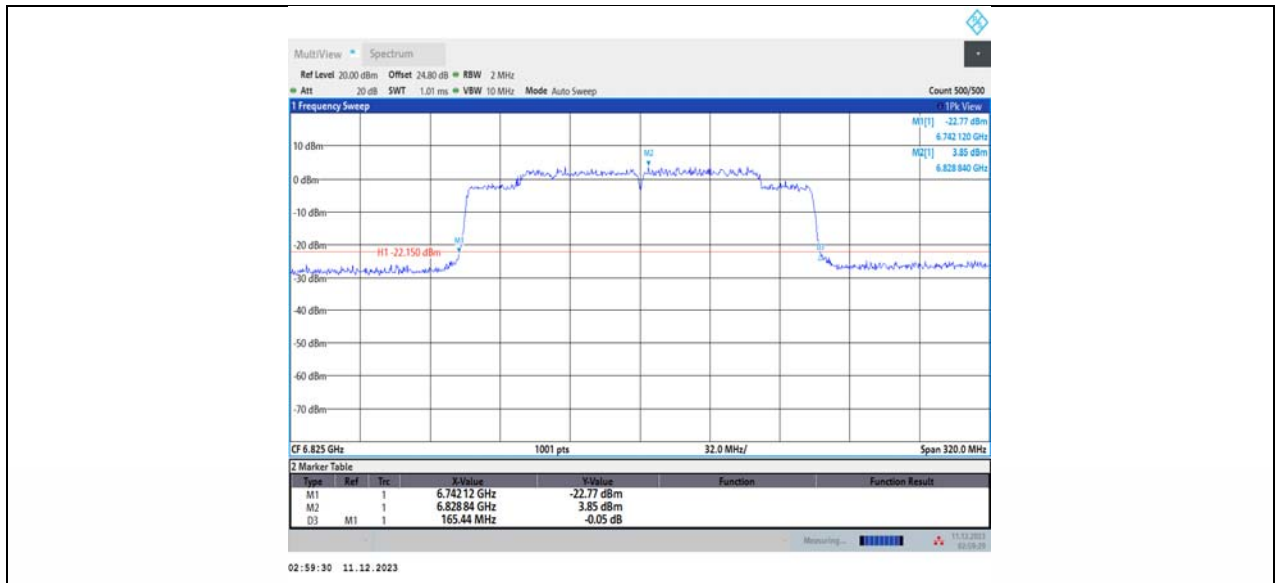


11AX160MIMO\_Ant1\_6825



11AX160MIMO\_Ant2\_6985

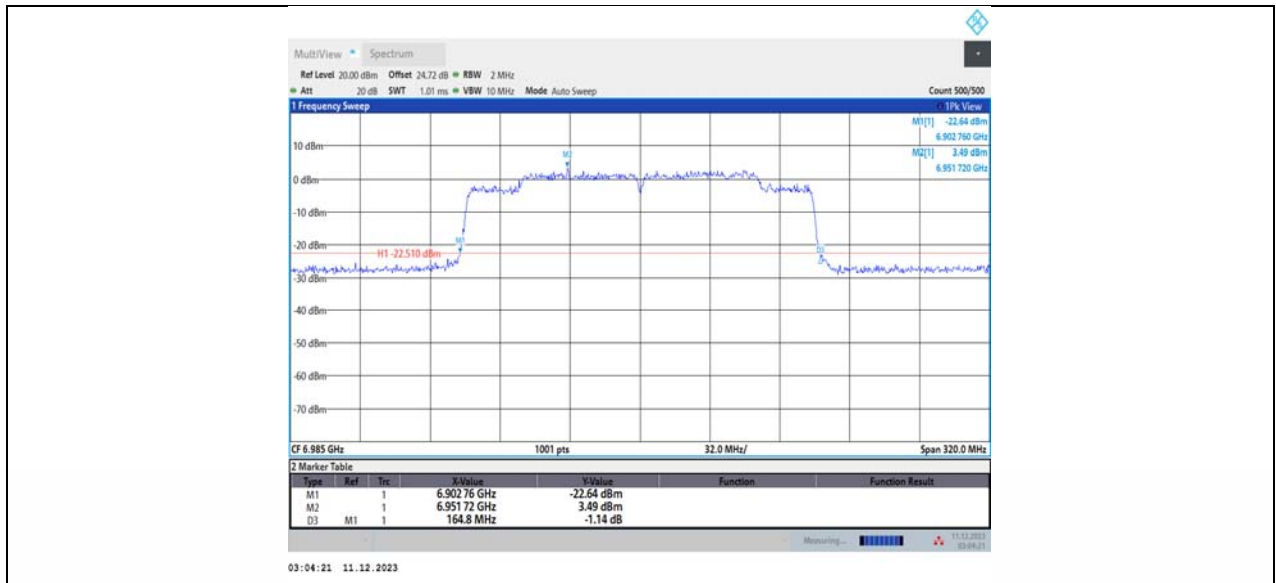

11AX160MIMO\_Ant1\_6985

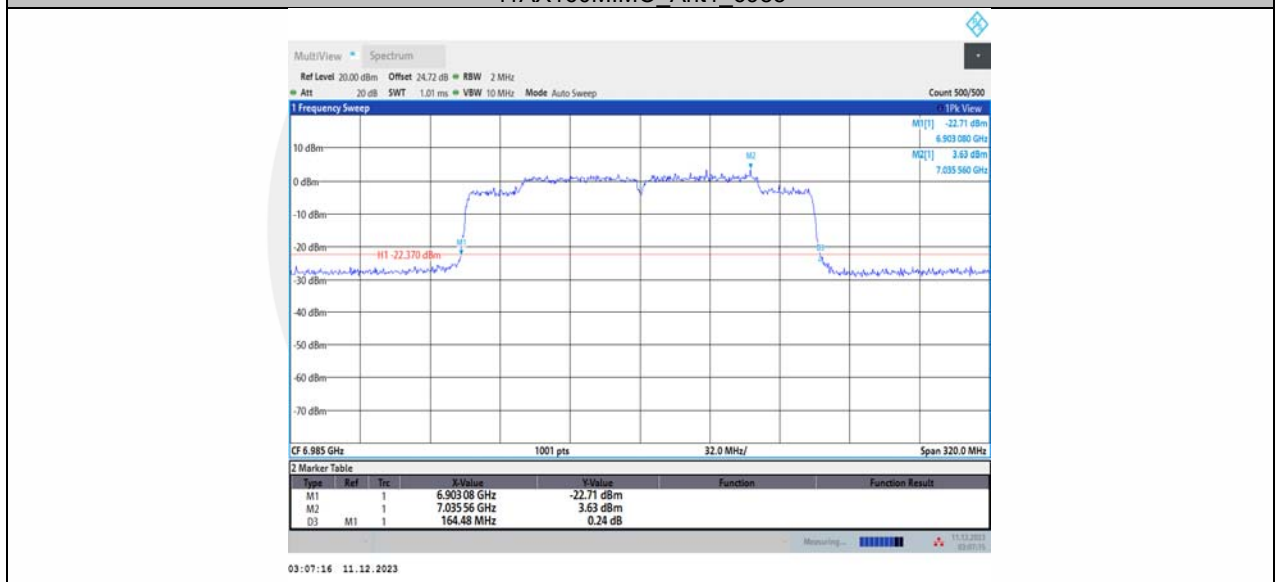



Test Mode	Antenna	Frequency[dbm]	Ru Size	Ru Index	26db BW [MHz]	FL [MHz]	FH [MHz]
11AX20MIMO	Ant2	5955	26Tone	RU0	20.24	5943.84	5964.08
			52Tone	RU37	20.60	5943.68	5964.28
			106Tone	RU53	21.76	5943.60	5965.36
	Ant1	5955	26Tone	RU0	19.92	5944.16	5964.08
			52Tone	RU37	20.16	5944.00	5964.16
			106Tone	RU53	20.72	5944.00	5964.72
	Ant2	6175	26Tone	RU0	20.00	6164.08	6184.08
			52Tone	RU37	20.28	6163.96	6184.24
			106Tone	RU53	21.36	6163.92	6185.28
	Ant1	6175	26Tone	RU0	19.72	6164.32	6184.04
			52Tone	RU37	20.08	6164.04	6184.12
			106Tone	RU53	20.72	6163.96	6184.68
	Ant2	6415	26Tone	RU0	20.08	6404.08	6424.16
			52Tone	RU37	20.32	6404.00	6424.32
			106Tone	RU53	21.00	6403.88	6424.88
	Ant1	6415	26Tone	RU0	19.56	6404.44	6424.00
			52Tone	RU37	20.04	6404.12	6424.16
			106Tone	RU53	20.64	6404.08	6424.72
	Ant2	6435	26Tone	RU0	20.68	6423.72	6444.40
			52Tone	RU37	20.56	6423.80	6444.36
			106Tone	RU53	21.40	6423.92	6445.32
	Ant1	6435	26Tone	RU0	19.80	6424.24	6444.04
			52Tone	RU37	20.52	6423.80	6444.32
			106Tone	RU53	20.56	6424.08	6444.64
	Ant2	6475	26Tone	RU0	20.96	6463.56	6484.52
			52Tone	RU37	21.40	6463.76	6485.16
			106Tone	RU53	21.52	6463.88	6485.40
	Ant1	6475	26Tone	RU0	20.28	6463.80	6484.08
			52Tone	RU37	20.52	6463.80	6484.32
			106Tone	RU53	20.28	6464.28	6484.56
	Ant2	6515	26Tone	RU0	20.36	6504.04	6524.40
			52Tone	RU37	20.72	6503.52	6524.24
			106Tone	RU53	21.40	6503.88	6525.28
	Ant1	6515	26Tone	RU0	20.28	6503.76	6524.04
			52Tone	RU37	19.80	6504.32	6524.12
			106Tone	RU53	20.60	6504.16	6524.76
	Ant2	6535	26Tone	RU0	20.00	6524.16	6544.16
			52Tone	RU37	20.68	6523.60	6544.28
			106Tone	RU53	20.88	6523.88	6544.76
	Ant1	6535	26Tone	RU0	19.84	6524.16	6544.00
			52Tone	RU37	20.00	6524.12	6544.12
			106Tone	RU53	20.52	6524.12	6544.64
	Ant2	6695	26Tone	RU0	20.20	6683.96	6704.16
			52Tone	RU37	20.28	6683.96	6704.24
			106Tone	RU53	21.12	6684.04	6705.16
	Ant1	6695	26Tone	RU0	19.88	6684.16	6704.04
			52Tone	RU37	19.96	6684.16	6704.12
			106Tone	RU53	20.32	6684.36	6704.68
Ant2	6855	26Tone	RU0	19.88	6844.16	6864.04	
		52Tone	RU37	20.40	6843.92	6864.32	
		106Tone	RU53	20.64	6843.92	6864.56	
Ant1	6855	26Tone	RU0	19.92	6844.12	6864.04	
		52Tone	RU37	19.96	6844.16	6864.12	
		106Tone	RU53	20.24	6844.16	6864.40	
Ant2	6875	26Tone	RU0	20.80	6863.60	6884.40	
		52Tone	RU37	20.68	6863.64	6884.32	
		106Tone	RU53	21.84	6863.36	6885.20	



	Ant1	6875	26Tone	RU0	20.12	6863.96	6884.08	
			52Tone	RU37	20.64	6863.92	6884.56	
			106Tone	RU53	20.80	6863.92	6884.72	
	Ant2	6895	26Tone	RU0	20.96	6883.64	6904.60	
			52Tone	RU37	21.32	6883.92	6905.24	
			106Tone	RU53	21.64	6883.88	6905.52	
	Ant1	6895	26Tone	RU0	20.68	6883.40	6904.08	
			52Tone	RU37	20.52	6883.64	6904.16	
			106Tone	RU53	20.40	6884.20	6904.60	
	Ant2	6995	26Tone	RU0	21.08	6983.60	7004.68	
			52Tone	RU37	20.28	6984.00	7004.28	
			106Tone	RU53	21.44	6983.84	7005.28	
	Ant1	6995	26Tone	RU0	20.36	6983.68	7004.04	
			52Tone	RU37	20.44	6983.88	7004.32	
			106Tone	RU53	20.60	6984.12	7004.72	
	Ant2	7115	26Tone	RU0	20.12	7104.04	7124.16	
			52Tone	RU37	20.44	7103.88	7124.32	
			106Tone	RU53	21.40	7103.96	7125.36	
	Ant1	7115	26Tone	RU0	20.04	7104.04	7124.08	
			52Tone	RU37	20.32	7103.96	7124.28	
			106Tone	RU53	20.40	7104.24	7124.64	
	11AX40MIMO	Ant2	5965	26Tone	RU0	20.56	5943.88	5964.44
				52Tone	RU37	21.12	5943.96	5965.08
				106Tone	RU53	21.68	5944.04	5965.72
242Tone				RU61	23.68	5943.16	5966.84	
Ant1		5965	26Tone	RU0	20.40	5943.96	5964.36	
			52Tone	RU37	20.80	5943.96	5964.76	
			106Tone	RU53	21.60	5943.96	5965.56	
			242Tone	RU61	22.80	5943.96	5966.76	
Ant2		6165	26Tone	RU0	20.40	6144.04	6164.44	
			52Tone	RU37	21.44	6143.88	6165.32	
			106Tone	RU53	21.60	6144.04	6165.64	
			242Tone	RU61	23.44	6143.08	6166.52	
Ant1		6165	26Tone	RU0	20.16	6144.20	6164.36	
			52Tone	RU37	20.72	6144.04	6164.76	
			106Tone	RU53	22.00	6143.96	6165.96	
			242Tone	RU61	22.96	6143.80	6166.76	
Ant2		6405	26Tone	RU0	20.56	6383.88	6404.44	
			52Tone	RU37	21.52	6383.88	6405.40	
			106Tone	RU53	22.32	6383.48	6405.80	
			242Tone	RU61	23.44	6383.24	6406.68	
Ant1		6405	26Tone	RU0	20.24	6384.04	6404.28	
			52Tone	RU37	20.48	6384.04	6404.52	
			106Tone	RU53	21.92	6383.96	6405.88	
			242Tone	RU61	23.28	6383.48	6406.76	
Ant2	6445	26Tone	RU0	21.04	6423.56	6444.60		
		52Tone	RU37	21.36	6423.96	6445.32		
		106Tone	RU53	21.28	6423.96	6445.24		
		242Tone	RU61	25.20	6422.36	6447.56		
Ant1	6445	26Tone	RU0	20.40	6423.96	6444.36		
		52Tone	RU37	20.88	6423.96	6444.84		
		106Tone	RU53	21.12	6424.04	6445.16		
		242Tone	RU61	24.88	6423.00	6447.88		
Ant2	6485	26Tone	RU0	20.32	6464.04	6484.36		
		52Tone	RU37	21.36	6463.56	6484.92		
		106Tone	RU53	21.68	6463.64	6485.32		
		242Tone	RU61	24.88	6462.60	6487.48		
Ant1	6485	26Tone	RU0	20.24	6463.96	6484.20		
		52Tone	RU37	20.88	6463.64	6484.52		
		106Tone	RU53	20.96	6464.12	6485.08		
		242Tone	RU61	25.20	6462.60	6487.80		

	Ant2	6525	26Tone	RU0	20.32	6503.96	6524.28
			52Tone	RU37	21.20	6503.48	6524.68
			106Tone	RU53	20.80	6504.12	6524.92
			242Tone	RU61	25.36	6502.52	6527.88
	Ant1	6525	26Tone	RU0	20.48	6503.88	6524.36
			52Tone	RU37	20.72	6503.88	6524.60
			106Tone	RU53	21.04	6503.96	6525.00
			242Tone	RU61	25.20	6502.52	6527.72
	Ant2	6565	26Tone	RU0	20.24	6544.04	6564.28
			52Tone	RU37	20.56	6543.96	6564.52
			106Tone	RU53	21.36	6543.96	6565.32
			242Tone	RU61	23.04	6543.64	6566.68
	Ant1	6565	26Tone	RU0	20.16	6544.04	6564.20
			52Tone	RU37	20.48	6544.04	6564.52
			106Tone	RU53	20.80	6544.36	6565.16
			242Tone	RU61	23.12	6543.88	6567.00
	Ant2	6685	26Tone	RU0	20.48	6663.88	6684.36
			52Tone	RU37	20.96	6663.72	6684.68
			106Tone	RU53	20.96	6664.04	6685.00
			242Tone	RU61	23.04	6663.88	6686.92
	Ant1	6685	26Tone	RU0	20.24	6663.96	6684.20
			52Tone	RU37	20.32	6663.96	6684.28
			106Tone	RU53	21.52	6663.72	6685.24
			242Tone	RU61	22.80	6663.96	6686.76
	Ant2	6845	26Tone	RU0	20.48	6823.96	6844.44
			52Tone	RU37	20.64	6824.04	6844.68
			106Tone	RU53	21.28	6823.88	6845.16
			242Tone	RU61	22.96	6823.64	6846.60
Ant1	6845	26Tone	RU0	20.24	6823.96	6844.20	
		52Tone	RU37	21.12	6823.56	6844.68	
		106Tone	RU53	21.20	6824.04	6845.24	
		242Tone	RU61	22.64	6823.96	6846.60	
Ant2	6885	26Tone	RU0	20.40	6863.96	6884.36	
		52Tone	RU37	20.80	6863.80	6884.60	
		106Tone	RU53	21.20	6863.80	6885.00	
		242Tone	RU61	25.20	6862.84	6888.04	
Ant1	6885	26Tone	RU0	20.88	6863.40	6884.28	
		52Tone	RU37	20.96	6863.80	6884.76	
		106Tone	RU53	20.88	6864.04	6884.92	
		242Tone	RU61	25.20	6862.52	6887.72	
Ant2	6925	26Tone	RU0	20.72	6903.64	6924.36	
		52Tone	RU37	21.04	6903.64	6924.68	
		106Tone	RU53	21.52	6903.88	6925.40	
		242Tone	RU61	25.20	6902.28	6927.48	
Ant1	6925	26Tone	RU0	20.64	6903.64	6924.28	
		52Tone	RU37	20.64	6903.88	6924.52	
		106Tone	RU53	21.52	6903.56	6925.08	
		242Tone	RU61	25.28	6902.36	6927.64	
Ant2	6965	26Tone	RU0	20.72	6943.88	6964.60	
		52Tone	RU37	21.52	6943.56	6965.08	
		106Tone	RU53	21.68	6943.64	6965.32	
		242Tone	RU61	26.00	6941.88	6967.88	
Ant1	6965	26Tone	RU0	20.88	6943.64	6964.52	
		52Tone	RU37	20.72	6943.72	6964.44	
		106Tone	RU53	20.96	6944.12	6965.08	
		242Tone	RU61	25.52	6942.36	6967.88	
Ant2	7085	26Tone	RU0	20.48	7063.80	7084.28	
		52Tone	RU37	20.72	7063.88	7084.60	
		106Tone	RU53	21.28	7063.72	7085.00	
		242Tone	RU61	25.28	7062.36	7087.64	
Ant1	7085	26Tone	RU0	19.92	7064.28	7084.20	


			52Tone	RU37	20.24	7064.20	7084.44
			106Tone	RU53	21.20	7063.96	7085.16
			242Tone	RU61	25.04	7062.52	7087.56
11AX80MIMO	Ant2	5985	26Tone	RU0	22.72	5942.92	5965.64
			52Tone	RU37	23.36	5943.08	5966.44
			106Tone	RU53	24.16	5942.76	5966.92
			242Tone	RU61	24.48	5942.92	5967.40
			484Tone	RU65	45.44	5942.28	5987.72
			26Tone	RU0	21.44	5943.24	5964.68
	Ant1	5985	52Tone	RU37	21.44	5943.40	5964.84
			106Tone	RU53	23.68	5943.08	5966.76
			242Tone	RU61	24.80	5942.92	5967.72
			484Tone	RU65	44.64	5941.96	5986.60
			26Tone	RU0	22.40	6103.56	6125.96
			52Tone	RU37	23.20	6103.08	6126.28
	Ant2	6145	106Tone	RU53	22.88	6103.40	6126.28
			242Tone	RU61	24.16	6103.24	6127.40
			484Tone	RU65	44.64	6103.40	6148.04
			26Tone	RU0	21.28	6103.40	6124.68
			52Tone	RU37	21.44	6103.40	6124.84
			106Tone	RU53	24.16	6103.08	6127.24
	Ant1	6145	242Tone	RU61	24.48	6103.24	6127.72
			484Tone	RU65	44.96	6102.12	6147.08
			26Tone	RU0	22.24	6343.56	6365.80
			52Tone	RU37	22.72	6343.40	6366.12
			106Tone	RU53	22.72	6343.56	6366.28
			242Tone	RU61	24.80	6342.28	6367.08
	Ant2	6385	484Tone	RU65	45.76	6343.08	6388.84
			26Tone	RU0	21.60	6343.08	6364.68
			52Tone	RU37	21.28	6343.40	6364.68
			106Tone	RU53	23.84	6342.92	6366.76
			242Tone	RU61	24.96	6342.44	6367.40
			484Tone	RU65	46.40	6341.96	6388.36
	Ant1	6385	26Tone	RU0	23.36	6423.08	6446.44
			52Tone	RU37	23.52	6423.24	6446.76
			106Tone	RU53	22.56	6423.40	6445.96
			242Tone	RU61	25.44	6422.44	6447.88
			484Tone	RU65	46.24	6422.12	6468.36
			26Tone	RU0	21.44	6423.40	6444.84
	Ant2	6465	52Tone	RU37	21.60	6423.56	6445.16
			106Tone	RU53	22.24	6423.24	6445.48
			242Tone	RU61	25.12	6422.60	6447.72
			484Tone	RU65	45.60	6422.28	6467.88
			26Tone	RU0	23.20	6502.92	6526.12
			52Tone	RU37	23.04	6503.40	6526.44
	Ant1	6545	106Tone	RU53	23.20	6503.56	6526.76
			242Tone	RU61	25.76	6502.12	6527.88
			484Tone	RU65	45.92	6501.80	6547.72
			26Tone	RU0	22.08	6502.92	6525.00
			52Tone	RU37	21.28	6503.56	6524.84
			106Tone	RU53	23.20	6503.40	6526.60
Ant2	6545	242Tone	RU61	26.24	6501.48	6527.72	
		484Tone	RU65	45.44	6502.28	6547.72	
		26Tone	RU0	22.72	6583.24	6605.96	
		52Tone	RU37	22.88	6583.40	6606.28	
		106Tone	RU53	22.72	6583.72	6606.44	
		242Tone	RU61	25.44	6582.44	6607.88	
Ant1	6625	484Tone	RU65	47.04	6582.12	6629.16	
		26Tone	RU0	21.44	6583.24	6604.68	
		52Tone	RU37	21.28	6583.72	6605.00	
		106Tone	RU53	24.64	6582.76	6607.40	

	Ant2	6705	242Tone	RU61	26.08	6581.96	6608.04
			484Tone	RU65	48.00	6581.48	6629.48
			26Tone	RU0	22.72	6663.24	6685.96
			52Tone	RU37	23.04	6663.40	6686.44
			106Tone	RU53	23.84	6662.92	6686.76
			242Tone	RU61	24.80	6663.08	6687.88
	Ant1	6705	484Tone	RU65	45.60	6661.64	6707.24
			26Tone	RU0	20.96	6663.72	6684.68
			52Tone	RU37	21.92	6663.24	6685.16
			106Tone	RU53	24.00	6663.08	6687.08
			242Tone	RU61	25.44	6662.60	6688.04
			484Tone	RU65	45.12	6662.60	6707.72
	Ant2	6785	26Tone	RU0	22.56	6743.24	6765.80
			52Tone	RU37	22.88	6743.24	6766.12
			106Tone	RU53	23.84	6742.92	6766.76
			242Tone	RU61	24.80	6742.44	6767.24
			484Tone	RU65	47.20	6741.16	6788.36
			Ant1	6785	26Tone	RU0	21.28
	52Tone	RU37			21.28	6743.72	6765.00
	106Tone	RU53			24.80	6742.60	6767.40
	242Tone	RU61			27.04	6741.48	6768.52
	484Tone	RU65			48.48	6741.16	6789.64
	Ant2	6865			26Tone	RU0	22.24
			52Tone	RU37	23.04	6823.08	6846.12
			106Tone	RU53	23.36	6823.40	6846.76
			242Tone	RU61	25.44	6822.44	6847.88
			484Tone	RU65	46.40	6821.96	6868.36
			Ant1	6865	26Tone	RU0	21.28
	52Tone	RU37			20.96	6823.88	6844.84
	106Tone	RU53			24.48	6822.76	6847.24
	242Tone	RU61			25.76	6822.28	6848.04
	484Tone	RU65			47.36	6821.48	6868.84
	Ant2	6945			26Tone	RU0	22.88
			52Tone	RU37	22.72	6903.72	6926.44
			106Tone	RU53	23.36	6903.40	6926.76
			242Tone	RU61	26.08	6901.96	6928.04
			484Tone	RU65	46.08	6901.64	6947.72
			Ant1	6945	26Tone	RU0	21.60
	52Tone	RU37			21.76	6903.24	6925.00
	106Tone	RU53			21.60	6903.72	6925.32
	242Tone	RU61			26.08	6901.96	6928.04
	484Tone	RU65			45.76	6902.12	6947.88
	Ant2	7025			26Tone	RU0	23.04
			52Tone	RU37	22.88	6983.40	7006.28
			106Tone	RU53	23.84	6983.24	7007.08
			242Tone	RU61	25.76	6982.28	7008.04
			484Tone	RU65	46.56	6981.64	7028.20
			Ant1	7025	26Tone	RU0	21.92
52Tone	RU37	22.08			6983.24	7005.32	
106Tone	RU53	23.52			6983.24	7006.76	
242Tone	RU61	25.60			6982.28	7007.88	
484Tone	RU65	44.64			6982.92	7027.56	
11AX160MIMO	Ant2	6025			996Tone	RU67	88.64
	Ant1	6025	996Tone	RU67	88.96	5938.92	6027.88
	Ant2	6185	996Tone	RU67	88.32	6099.24	6187.56
	Ant1	6185	996Tone	RU67	89.60	6097.96	6187.56
	Ant2	6345	996Tone	RU67	87.68	6260.20	6347.88
	Ant1	6345	996Tone	RU67	86.40	6261.16	6347.56
	Ant2	6505	996Tone	RU67	88.64	6420.52	6509.16
	Ant1	6505	996Tone	RU67	89.28	6420.52	6509.80
	Ant2	6665	996Tone	RU67	93.76	6575.08	6668.84


	Ant1	6665	996Tone	RU67	92.48	6576.36	6668.84
	Ant2	6825	996Tone	RU67	90.24	6738.28	6828.52
	Ant1	6825	996Tone	RU67	91.20	6737.00	6828.20
	Ant2	6985	996Tone	RU67	86.72	6901.80	6988.52
	Ant1	6985	996Tone	RU67	88.00	6900.20	6988.20



11AX20MIMO\_Ant2\_5955\_26Tone\_RU0

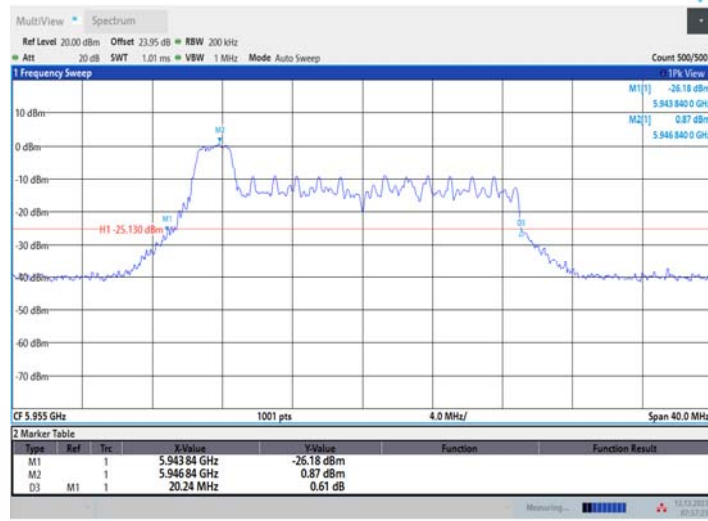

11AX20MIMO\_Ant2\_5955\_52Tone\_RU37

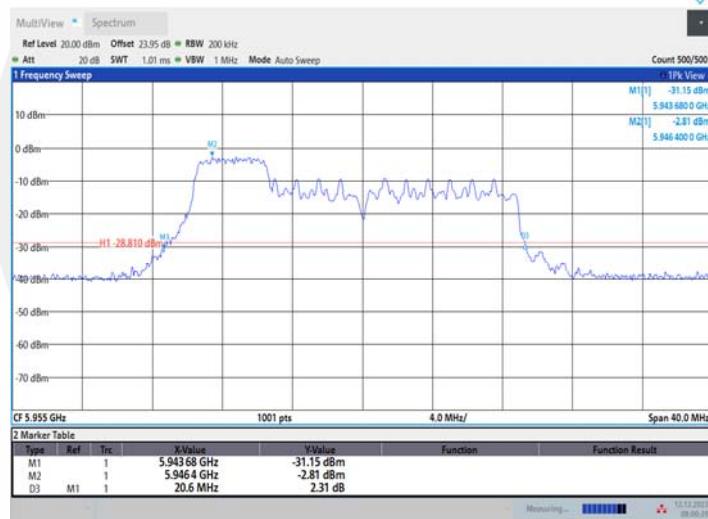

11AX20MIMO\_Ant2\_5955\_106Tone\_RU53






11AX20MIMO\_Ant1\_5955\_26Tone\_RU0



11AX20MIMO\_Ant1\_5955\_52Tone\_RU37




11AX20MIMO\_Ant1\_5955\_106Tone\_RU53

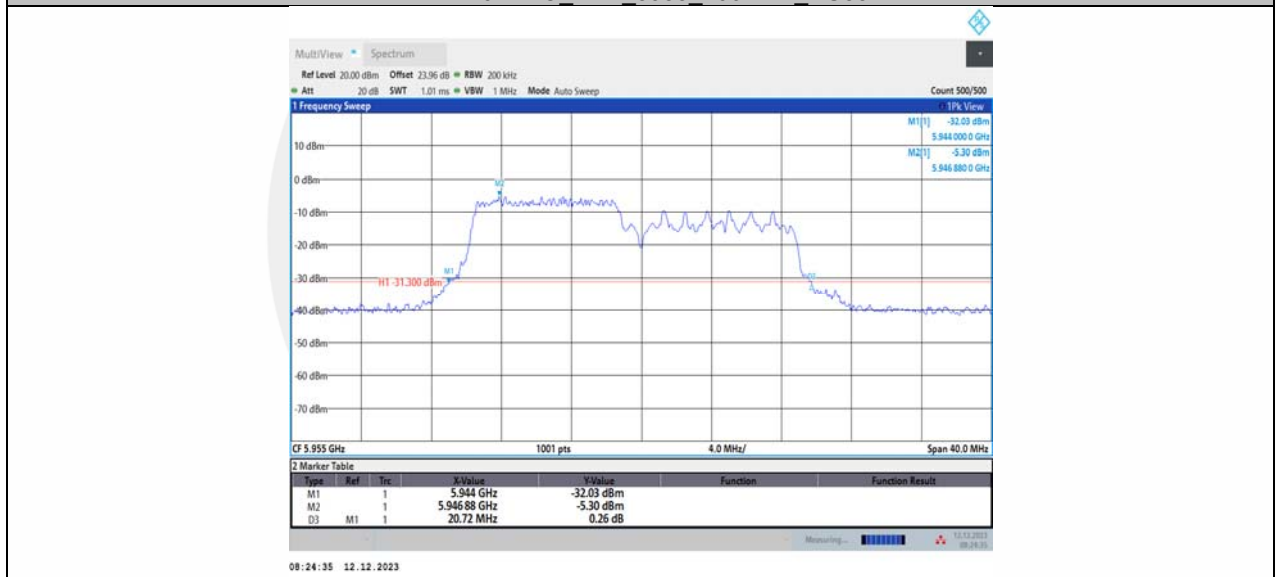


11AX20MIMO\_Ant2\_6175\_26Tone\_RU0




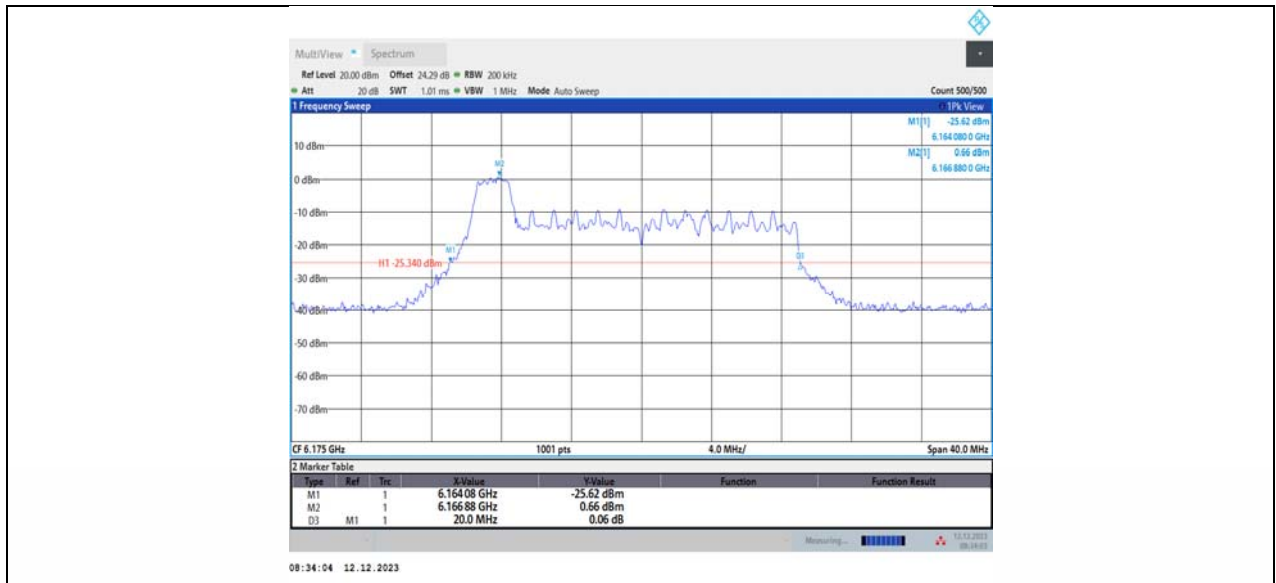

11AX20MIMO\_Ant2\_6175\_52Tone\_RU37

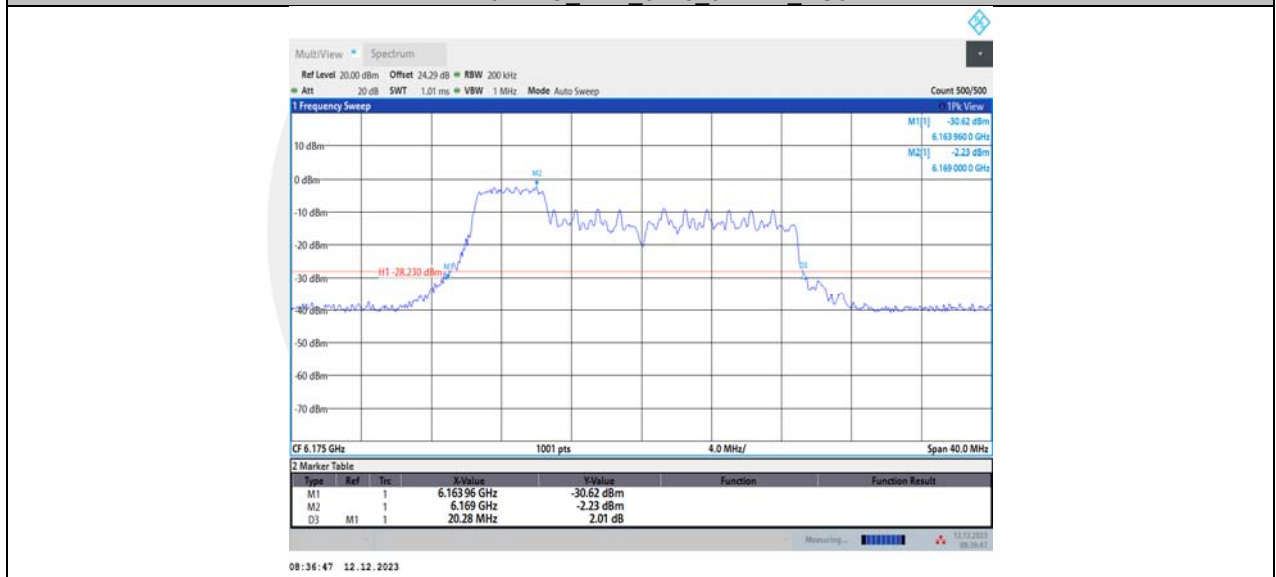

11AX20MIMO\_Ant2\_6175\_106Tone\_RU53

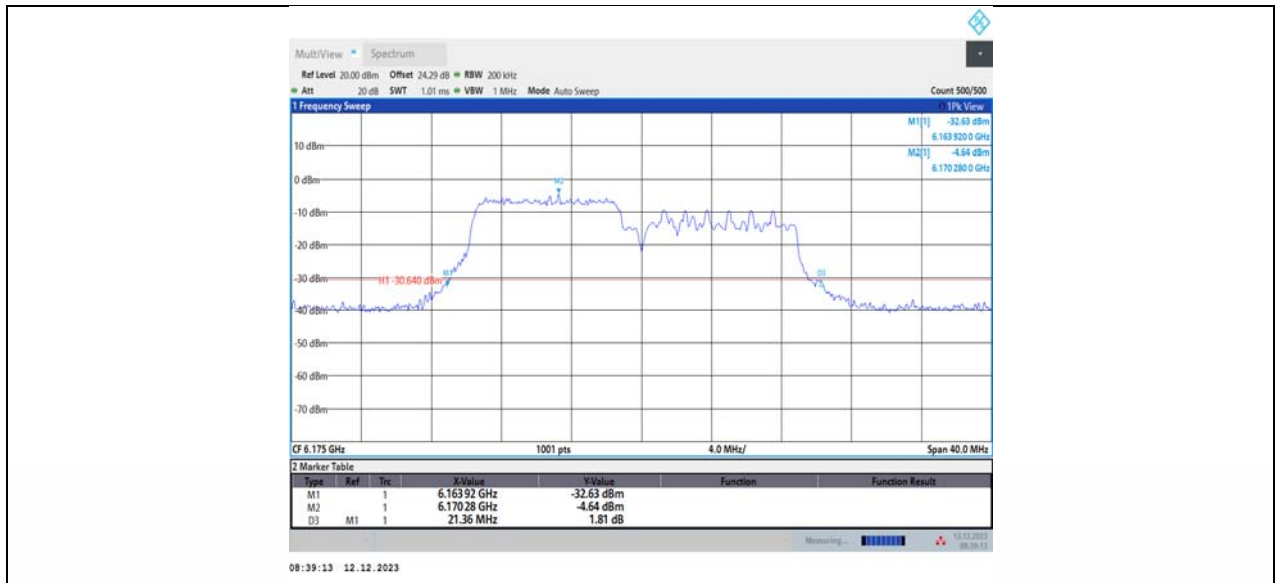

11AX20MIMO\_Ant1\_6175\_26Tone\_RU0




11AX20MIMO\_Ant1\_6175\_52Tone\_RU37




08:37:53 12.12.2023

11AX20MIMO\_Ant1\_6175\_106Tone\_RU53

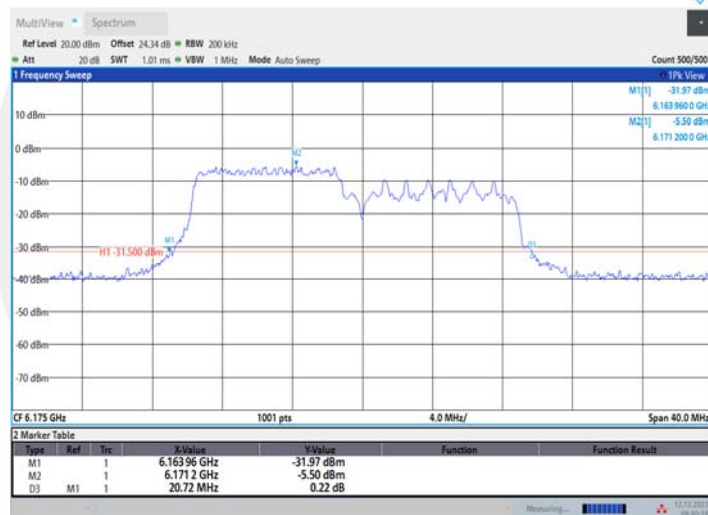


08:40:18 12.12.2023

11AX20MIMO\_Ant2\_6415\_26Tone\_RU0

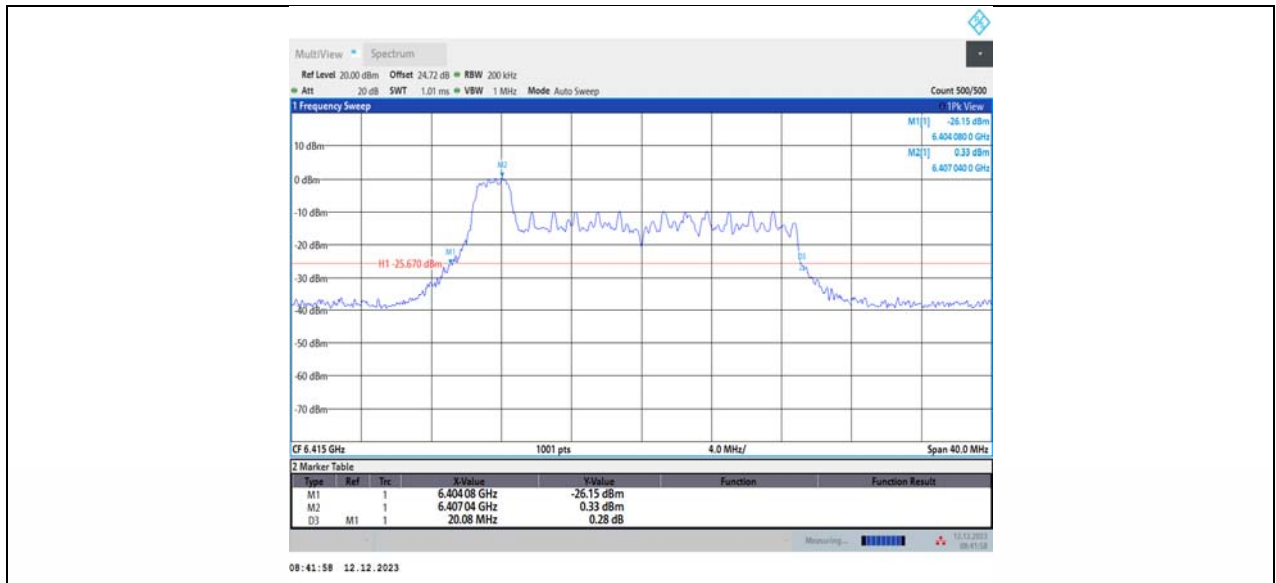


11AX20MIMO\_Ant2\_6415\_52Tone\_RU37

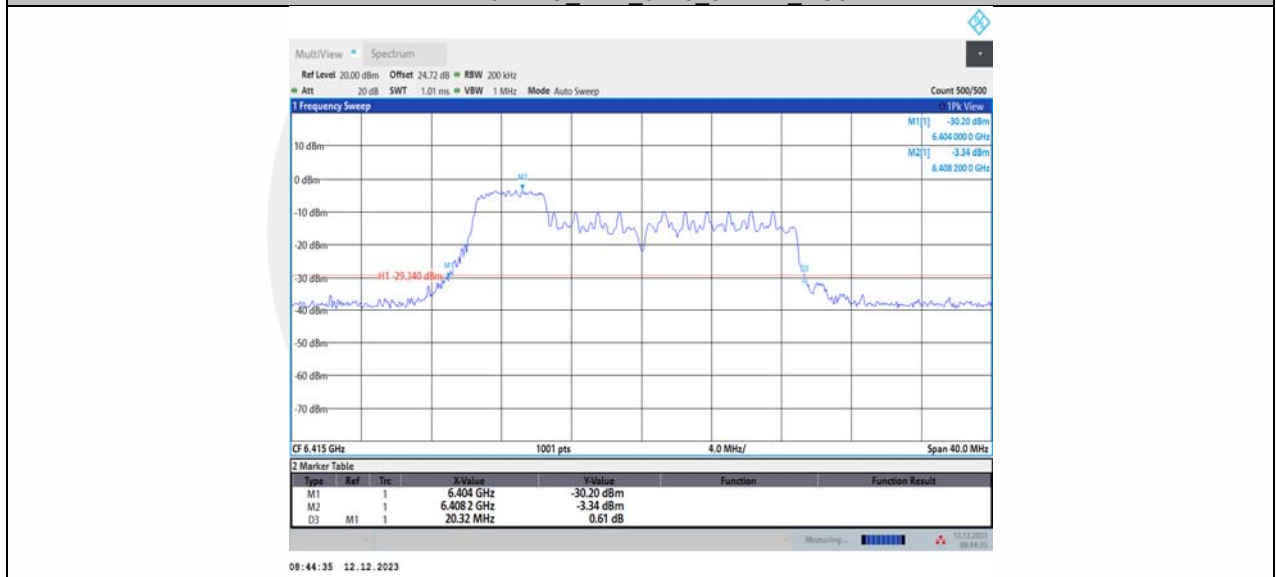

11AX20MIMO\_Ant2\_6415\_106Tone\_RU53



11AX20MIMO\_Ant1\_6415\_26Tone\_RU0

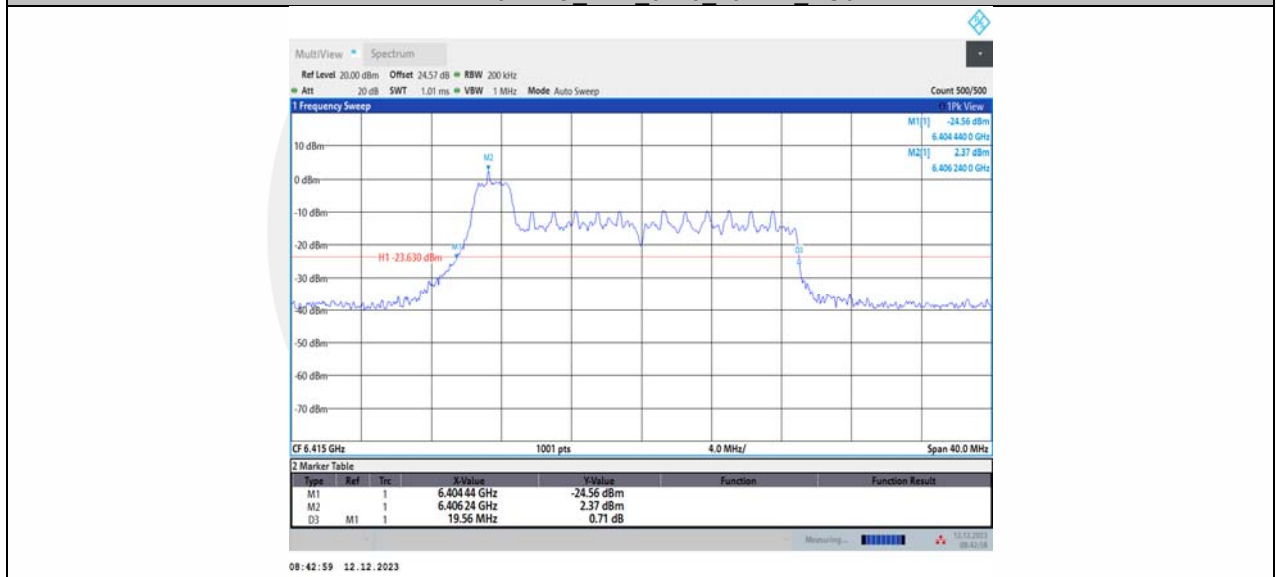

11AX20MIMO\_Ant1\_6415\_52Tone\_RU37



11AX20MIMO\_Ant1\_6415\_106Tone\_RU53



11AX20MIMO\_Ant2\_6435\_26Tone\_RU0



11AX20MIMO\_Ant2\_6435\_52Tone\_RU37



11AX20MIMO\_Ant2\_6435\_106Tone\_RU53