



## **FCC Part 15 Subpart**

### **TEST REPORT**

### **FOR**

**Product Name: Mobile Panel PC**

**Model: MPC ; MPCu ; MPCd ; MPCw ; r5PAD; MPCx ;  
(x=0~9;a~z,A~Z or blank)  
Trade Name: SENOR**

Issued to

**SENOR TECH CO.,LTD.**

5F., No. 165, Kang Ning Street, Xizhi Dist., New Taipei City 22150, Taiwan

Issued by

**Global Certification Corp.**

No.146, Sec. 2, Xiangzhang Rd., Xizhi Dist.,New Taipei City 221,  
Taiwan (R.O.C.)



*Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of Global Certification Corporation. This document may be altered or revised by Global Certification Corporation. Personnel only, and shall be noted in the revision section of the document.*



---

**Revision History**

| Revision | No.         | Report Number | Issue Date    | Description     | Author/<br>Revised<br>by |
|----------|-------------|---------------|---------------|-----------------|--------------------------|
| 1.       | FR2B-790101 | FR2B-790101   | Feb. 27, 2018 | Original Report | Michelle                 |
|          |             |               |               |                 |                          |



|                                                    |           |
|----------------------------------------------------|-----------|
| <b>TABLE OF CONTENTS</b>                           | <b>3</b>  |
| <b>1. GENERAL INFORMATION</b>                      | <b>5</b>  |
| 1.1 DESCRIPTION OF THE TESTED SAMPLES              | 6         |
| <b>2. TEST METHODOLOGY</b>                         | <b>9</b>  |
| 2.1 GENERAL TEST PROCEDURES                        | 9         |
| 2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS | 9         |
| 2.3 DESCRIPTION OF TEST MODES                      | 10        |
| 2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS          | 11        |
| <b>3. TEST AND MEASUREMENT EQUIPMENT</b>           | <b>12</b> |
| 3.1 CALIBRATION                                    | 12        |
| 3.2 EQUIPMENT                                      | 12        |
| <b>4. ANTENNA REQUIREMENTS</b>                     | <b>14</b> |
| 4.1 STANDARD APPLICABLE                            | 14        |
| 4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN      | 14        |
| <b>5. PEAK OUTPUT POWER</b>                        | <b>15</b> |
| 5.1 TEST SETUP                                     | 15        |
| 5.2 LIMIT                                          | 15        |
| 5.3 TEST PROCEDURE                                 | 15        |
| 5.4 TEST RESULT                                    | 15        |
| 5.5 TEST DATA                                      | 16        |
| <b>6. BAND EDGE</b>                                | <b>17</b> |
| 6.1 TEST SETUP                                     | 17        |
| 6.2 LIMIT                                          | 18        |
| 6.3 RESULT                                         | 18        |
| 6.4 TEST DATA                                      | 19        |
| <b>7. 20DB BANDWIDTH</b>                           | <b>27</b> |
| 7.1 TEST SETUP                                     | 27        |
| 7.2 TEST PROCEDURE                                 | 27        |
| 7.3 LIMIT                                          | 27        |
| 7.4 RESULT                                         | 27        |
| 7.5 TEST DATA                                      | 27        |
| <b>8. RADIATED EMISSION</b>                        | <b>32</b> |
| 8.1 TEST SETUP                                     | 32        |
| 8.2 LIMIT                                          | 33        |
| 8.3 TEST PROCEDURE                                 | 34        |
| 8.4 RESULT: PASS                                   | 34        |
| 8.5 TEST DATA                                      | 34        |
| <b>9. CONDUCTED EMISSIONS</b>                      | <b>50</b> |
| 9.1 TEST SETUP                                     | 50        |
| 9.2 LIMIT                                          | 50        |
| 9.3 TEST PROCEDURE                                 | 50        |
| 9.4 TEST SPECIFICATION                             | 50        |
| 9.5 RESULT                                         | 51        |
| 9.6 TEST DATA                                      | 51        |
| <b>10. SPURIOUS EMISSIONS</b>                      | <b>53</b> |



---

|            |                                        |           |
|------------|----------------------------------------|-----------|
| 10.1       | TEST SETUP -----                       | 53        |
| 10.2       | LIMIT -----                            | 53        |
| 10.3       | TEST PROCEDURE-----                    | 53        |
| 10.4       | TEST RESULTS-----                      | 53        |
| 10.5       | TEST DATA -----                        | 54        |
| <b>11.</b> | <b>CHANNEL SEPARATION -----</b>        | <b>58</b> |
| 11.1       | TEST SETUP -----                       | 59        |
| 11.2       | TEST PROCEDURE-----                    | 59        |
| 11.3       | LIMIT -----                            | 59        |
| 11.4       | RESULT -----                           | 59        |
| 11.5       | TEST DATA -----                        | 59        |
| <b>12.</b> | <b>DWELL TIME OF EACH CHANNEL-----</b> | <b>64</b> |
| 12.1       | TEST SETUP -----                       | 64        |
| 12.2       | TEST PROCEDURE-----                    | 64        |
| 12.3       | LIMIT -----                            | 64        |
| 12.4       | RESULT -----                           | 64        |
| 12.5       | TEST DATA -----                        | 64        |
| <b>13.</b> | <b>NUMBER OF CHANNELS -----</b>        | <b>76</b> |
| 13.1       | TEST SETUP -----                       | 76        |
| 13.2       | TEST PROCEDURE-----                    | 76        |
| 13.3       | LIMIT -----                            | 76        |
| 13.4       | RESULT -----                           | 76        |
| 13.5       | TEST DATA -----                        | 76        |



## 1. GENERAL INFORMATION

**Applicant** : SENOR TECH CO.,LTD.

**Address** : 5F., No. 165, Kang Ning Street, Xizhi Dist., New Taipei City  
22150, Taiwan

**Manufacturer** : SENOR TECH CO.,LTD.

**Address** : 5F., No. 165, Kang Ning Street, Xizhi Dist., New Taipei City

**EUT** : Mobile Panel PC

**Model No.** : MPC ; MPCu ; MPCd ; MPCw ; r5PAD; MPCx ;  
(x=0~9;a~z,A~Z or blank)

**Trade Name** : SENOR

**Model Differences** : The major electrical and mechanical constructions of series models are identical to the basic model, except different marketing purpose. The model, MPC is the testing sample, and the final test data are shown on this test report.


Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI 63.10:2013. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

**FCC Part 15 Subpart C 15.247**

**Tested By:**

**Approved by:**

Feb. 27, 2018  
**Date**

  
Eason Hsu, Engineer

Feb. 27, 2018  
**Date**

  
Adam Chou, Manager

**Designation Number: TW1640**



## 1.1 DESCRIPTION OF THE TESTED SAMPLES

EUT Name : Mobile Panel PC  
Model Number : MPC  
FCC ID : OVS-MPC  
Power From ☒Inside☒Outside  
☒Adaptor ☒Battery ☐Power Supply ☐DC Power Source ☐Support Unit PC  
Power Rating(Battery) : 3.8Vdc  
Power Rating(Adapter) I/P : 100-240Vac 56/60Hz 0.5A  
O/P : 5.0Vdc, 3.0A  
Operate Frequency : Refer to the channel list as described below  
Number of Channels : 79  
Channel spacing : ☐N/A ☒ 1 MHz  
Modulation Type : FHSS(GFSK)  
Antenna Type : ☐integral antenna: ☒PCB Printing ☐a dedicated antenna  
Antenna gain 2.38 dBi

| Channels | Frequencies (MHz) | Channels | Frequencies (MHz) |
|----------|-------------------|----------|-------------------|
| 0        | 2402              | 40       | 2442              |
| 1        | 2403              | 41       | 2443              |
| 2        | 2404              | 42       | 2444              |
| 3        | 2405              | 43       | 2445              |
| 4        | 2406              | 44       | 2446              |
| 5        | 2407              | 45       | 2447              |
| 6        | 2408              | 46       | 2448              |
| 7        | 2409              | 47       | 2449              |
| 8        | 2410              | 48       | 2450              |
| 9        | 2411              | 49       | 2451              |
| 10       | 2412              | 50       | 2452              |
| 11       | 2413              | 51       | 2453              |
| 12       | 2414              | 52       | 2454              |
| 13       | 2415              | 53       | 2455              |
| 14       | 2416              | 54       | 2456              |
| 15       | 2417              | 55       | 2457              |
| 16       | 2418              | 56       | 2458              |
| 17       | 2419              | 57       | 2459              |
| 18       | 2420              | 58       | 2460              |
| 19       | 2421              | 59       | 2461              |
| 20       | 2422              | 60       | 2462              |



|    |      |    |      |
|----|------|----|------|
| 21 | 2423 | 61 | 2463 |
| 22 | 2424 | 62 | 2464 |
| 23 | 2425 | 63 | 2465 |
| 24 | 2426 | 64 | 2466 |
| 25 | 2427 | 65 | 2467 |
| 26 | 2428 | 66 | 2468 |
| 27 | 2429 | 67 | 2469 |
| 28 | 2430 | 68 | 2470 |
| 29 | 2431 | 69 | 2471 |
| 30 | 2432 | 70 | 2472 |
| 31 | 2433 | 71 | 2473 |
| 32 | 2434 | 72 | 2474 |
| 33 | 2435 | 73 | 2475 |
| 34 | 2436 | 74 | 2476 |
| 35 | 2437 | 75 | 2477 |
| 36 | 2438 | 76 | 2478 |
| 37 | 2439 | 77 | 2479 |
| 38 | 2440 | 78 | 2480 |
| 39 | 2441 |    |      |

**1.3 LIST OF MEASUREMENTS AND EXAMINATIONS**

| FCC Rule            | Description of Test                | Result |
|---------------------|------------------------------------|--------|
| 15.203              | Antenna Requirement                | Pass   |
| 15.207              | Conducted Emission                 | Pass   |
| 15.209<br>15.247(d) | Radiated Emission                  | Pass   |
| 15.247(d)           | Spurious Emmission                 | Pass   |
| 15.247(b)           | Band Edges Measurement Data        | Pass   |
| 15.247(b)(1)        | Peak Output Power Measurement Data | Pass   |
| 15.247(a)(1)        | Channel Separation                 | Pass   |
| 15.247(a)(1)        | Dwell Time of Each Channel         | Pass   |
| 15.247(a)(1)        | Number of Channels                 | Pass   |



---

|              |                            |      |
|--------------|----------------------------|------|
| 15.247(a)(1) | 20dB Bandwidth Measurement | Pass |
|--------------|----------------------------|------|





## 2. TEST METHODOLOGY

All testing as described bellowed were performed in accordance with ANSI 63.10:2013 and FCC CFR 47 Part 15 Subpart C.

### 2.1 GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI 63.10:2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

#### Radiated Emissions

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

### 2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz              |
|---------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110       | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| 10.495 - 0.505      | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905     | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128       | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775   | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775   | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218       | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825   | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225   | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294       | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366       | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675   | 156.7 - 156.9         | 2655 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475   | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293      | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025 | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725 | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41       |                       |                 |                  |

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6



(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

## **2.3 DESCRIPTION OF TEST MODES**

The EUT was tested under following modes:

**Modes:**

- 1. Continuous transmitting**

**Channels:**

- 1. 2.402GHz (Lowest Channel)**
- 2. 2.441GHz (Middle Channel)**
- 3. 2.480GHz (Highest Channel)**



## 2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS

### **Setup Diagram**

See test photographs attached in appendix 1 for the actual connections between EUT and support equipment.

### **Support Equipment**

Peripherals Devices:

| OUTSIDE SUPPORT EQUIPMENT |           |       |            |                    |            |            |            |
|---------------------------|-----------|-------|------------|--------------------|------------|------------|------------|
| No.                       | Equipment | Model | Serial No. | FCC ID/<br>BSMI ID | Trade name | Data Cable | Power Cord |
| N/A                       | N/A       | N/A   | N/A        | N/A                | N/A        | N/A        | N/A        |

**Note:** All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

**Grounding:** Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



### 3. TEST AND MEASUREMENT EQUIPMENT

#### 3.1 CALIBRATION

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

#### 3.2 EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

**TABLE 1 LIST OF TEST AND MEASUREMENT EQUIPMENT**

| Instrument                       | Manufacturer  | Model No.         | Serial No. | Calibration Due Date | Note             |
|----------------------------------|---------------|-------------------|------------|----------------------|------------------|
| EMC Test Receiver                | R&S           | ESCI              | 100438     | Dec. 16, 2018        |                  |
| LISN #1                          | SCHWARZBECK   | NNLK8121          | 550213     | Feb. 02, 2019        | For EUT          |
| LISN #2                          | EMCO          | 3825/2            | 9001-1400  | N/A                  | For Support Unit |
| RF Cable                         | Huber+Suhner  | RG223/U           | Cable-001  | Dec.17, 2018         |                  |
| Impedance Stabilization          | Teseq GmbH    | ISNT800           | 23334      | Nov. 08, 2018        |                  |
| Absorbing Clamp                  | COM-POWER     | AB-050            | 421915     | Aug. 17,2019         |                  |
| RF Cable                         | Huber+Suhner  | 5D-FB             | CABLE-007  | Aug. 16,2019         |                  |
| EMC Test Receiver                | R&S           | FSV40             | 101088     | Sep. 28, 2018        |                  |
| Bilog Antenna                    | SUNOL         | JB1               | A052204    | Feb. 21, 2019        |                  |
| Pre-Amplifier                    | WIRELESS      | FPA-6592G         | 60028      | Sep. 28, 2018        |                  |
| RF Cable_NSA_Rx                  | HUBER + UHNER | RG213/U           | Cable-004  | Sep. 27, 2018        |                  |
| Double Ridged Guide HORN ANTENNA | EST.LINDGREN  | 3117              | 119028     | Apr.18, 2019         |                  |
| SMA_Cable                        | HUBER SUHNER  | EMC104-SM-SM-1000 | 170238     | Mar. 05, 2019        |                  |



---

|                           |                   |              |          |               |  |
|---------------------------|-------------------|--------------|----------|---------------|--|
| RF Cable<br>(sVSWR_TX)    | Huber Suhenr      | SUCOFLEX 104 | 293864/4 | Mar. 05, 2019 |  |
| Microwave<br>Preamplifier | EMCINSTRUMEN<br>T | EMC051845    | 980059   | Apr. 17, 2019 |  |
| EMC Test Receiver         | R&S               | ESCI         | 100438   | Dec. 16, 2018 |  |

※ Calibration interval of instruments listed above is one year



## **4. ANTENNA REQUIREMENTS**

### **4.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(b), if transmitting antennas of direction gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### **4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN**

Antenna type: PCB Antenna  
Antenna Gain: 2.38dBi



## **5. PEAK OUTPUT POWER**

### **5.1 TEST SETUP**

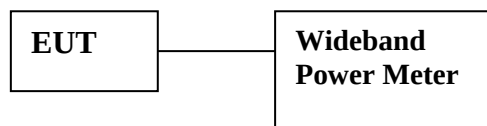

### **5.2 LIMIT**

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to § 15.247(b)(3) , for systems using digital modulation in the bands of 902 – 928 MHz , 2400 – 2483.5 MHz: 1 Watt.
2. According to § 15.247(b)(4) , the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used , the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) , (b)(2) , and (b)(3) of this section , as appropriate , by the amount in dB that directional gain of the antenna exceeds 6 dBi.

### **5.3 TEST PROCEDURE**

1. Peak power is measured using the wideband power meter.
2. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

### **5.4 TEST RESULT: PASS**




**5.5 TEST DATA:**

| Modulation Type | Packet | Frequency | Conducted Power (dBm) | Conducted Power (W) | Max. Limit(dBm) | Max. Limit(W) |
|-----------------|--------|-----------|-----------------------|---------------------|-----------------|---------------|
| GFSK            | DH5    | 2402 MHz  | -26.68                | 0.00000215          | 30.00           | 1.00          |
|                 |        | 2441 MHz  | -26.25                | 0.00000237          | 30.00           | 1.00          |
|                 |        | 2480 MHz  | -24.15                | 0.00000385          | 30.00           | 1.00          |
| 8-DPSK          | 3DH5   | 2402 MHz  | -24.2                 | 0.00000380          | 30.00           | 1.00          |
|                 |        | 2441 MHz  | -22.7                 | 0.00000537          | 30.00           | 1.00          |
|                 |        | 2480 MHz  | -20.84                | 0.00000824          | 30.00           | 1.00          |



## 6. BAND EDGE

### 6.1 TEST SETUP

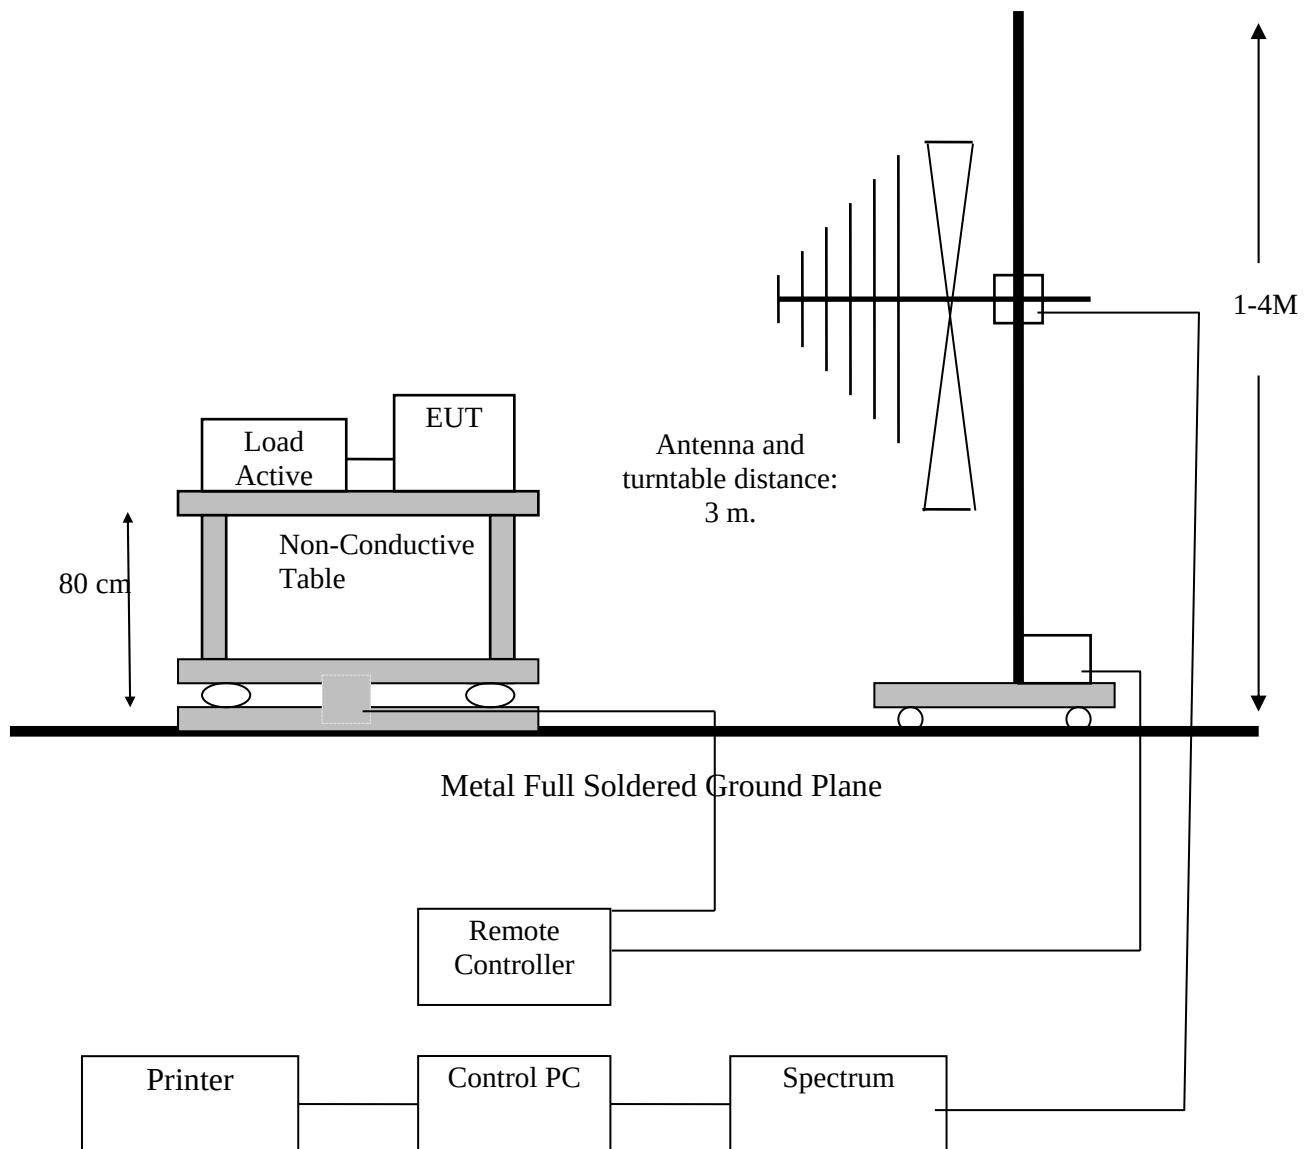



## 6.2 LIMIT

Restricted Bands:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              |                       |                 |                  |

Operation within the bands:

902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

| Frequency (Hz) | Field Strength<br>( $\mu$ V/m at 3-meter) | Field Strength<br>(dB $\mu$ V/m at 3-meter) |
|----------------|-------------------------------------------|---------------------------------------------|
| 1.705-30       | 30 (at 30-meter)                          | 69.54                                       |
| 30-88          | 100                                       | 40                                          |
| 88-216         | 150                                       | 43                                          |
| 216-960        | 200                                       | 46                                          |
| Above 960      | 500                                       | 54                                          |


## 6.3 RESULT: PASS



## 6.4 TEST DATA:

### BDR 1M

Lowest Channel- Horizontal

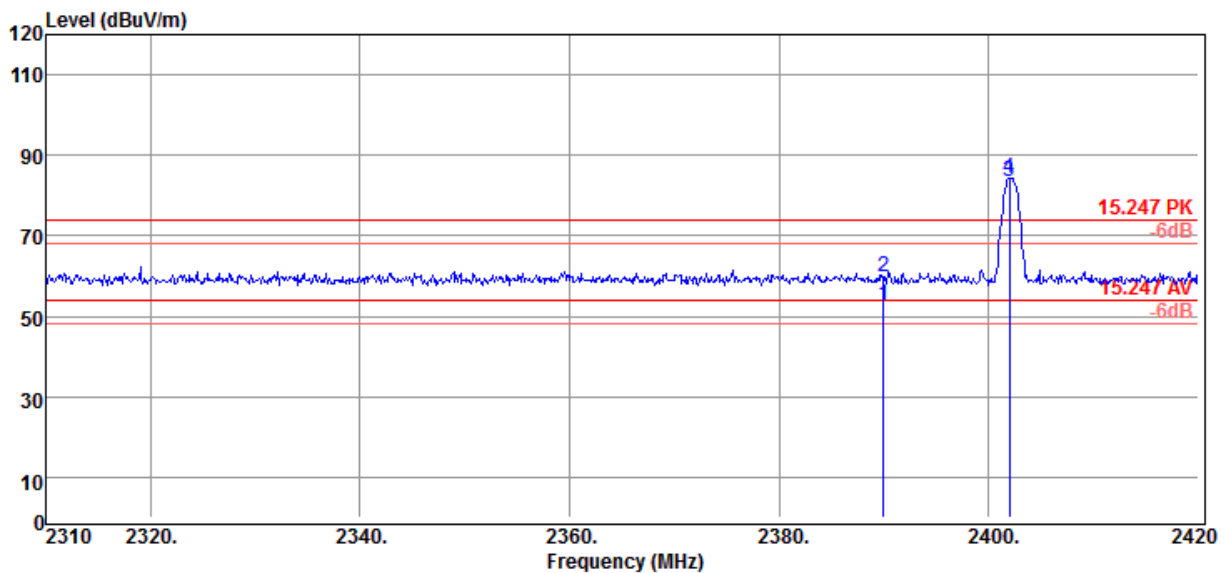

|   | Freq<br>MHz | Meter<br>Level<br>dBUV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBUV/m | Limit<br>Line<br>dBUV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 2389.97     | 16.42                  | 36.33                    | 3.83                | 32.50                     | 0.00                 | 52.75                   | 54.00                   | -1.25        | Average |
| 2 | 2389.97     | 23.44                  | 36.33                    | 3.83                | 32.50                     | 0.00                 | 59.77                   | 74.00                   | -14.23       | Peak    |
| 3 | 2402.00     | 47.22                  | 36.34                    | 3.82                | 32.52                     | 0.00                 | 83.56                   | 54.00                   | 29.56        | Average |
| 4 | 2402.00     | 47.92                  | 36.34                    | 3.82                | 32.52                     | 0.00                 | 84.26                   | 74.00                   | 10.26        | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Lowest Channel-Vertical

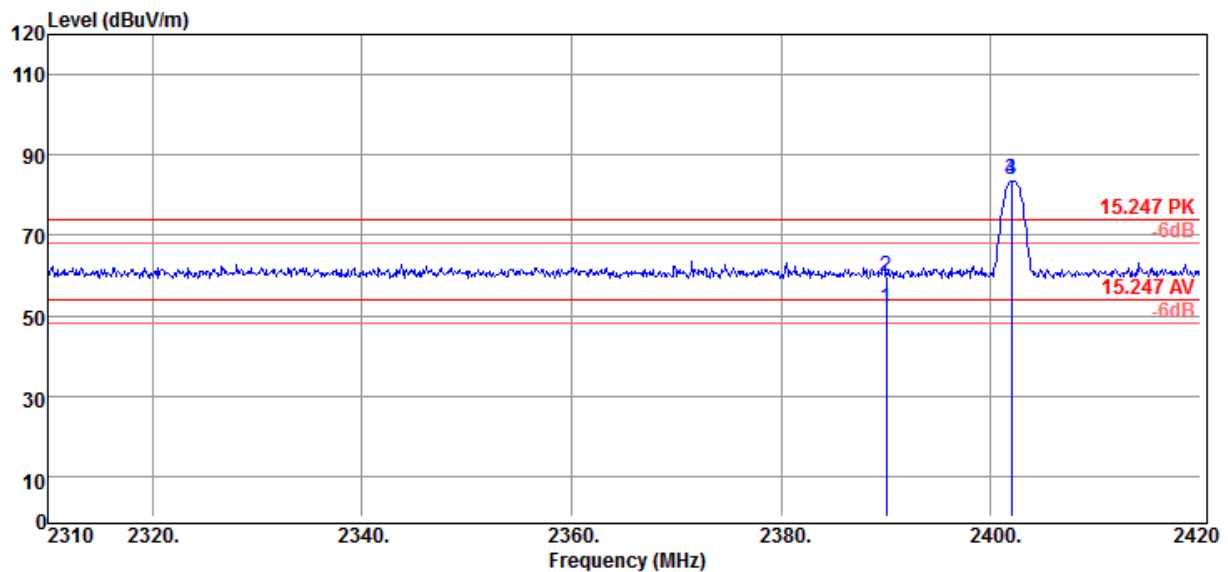

|   | Freq<br>MHz | Meter<br>Level<br>dBUV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBUV/m | Limit<br>Line<br>dBUV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 2390.00     | 15.41                  | 36.33                    | 3.83                | 32.50                     | 0.00                 | 51.74                   | 54.00                   | -2.26        | Average |
| 2 | 2390.00     | 23.47                  | 36.33                    | 3.83                | 32.50                     | 0.00                 | 59.80                   | 74.00                   | -14.20       | Peak    |
| 3 | 2402.00     | 47.40                  | 36.34                    | 3.82                | 32.52                     | 0.00                 | 83.74                   | 54.00                   | 29.74        | Average |
| 4 | 2402.00     | 47.48                  | 36.34                    | 3.82                | 32.52                     | 0.00                 | 83.82                   | 74.00                   | 9.82         | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Horizontal

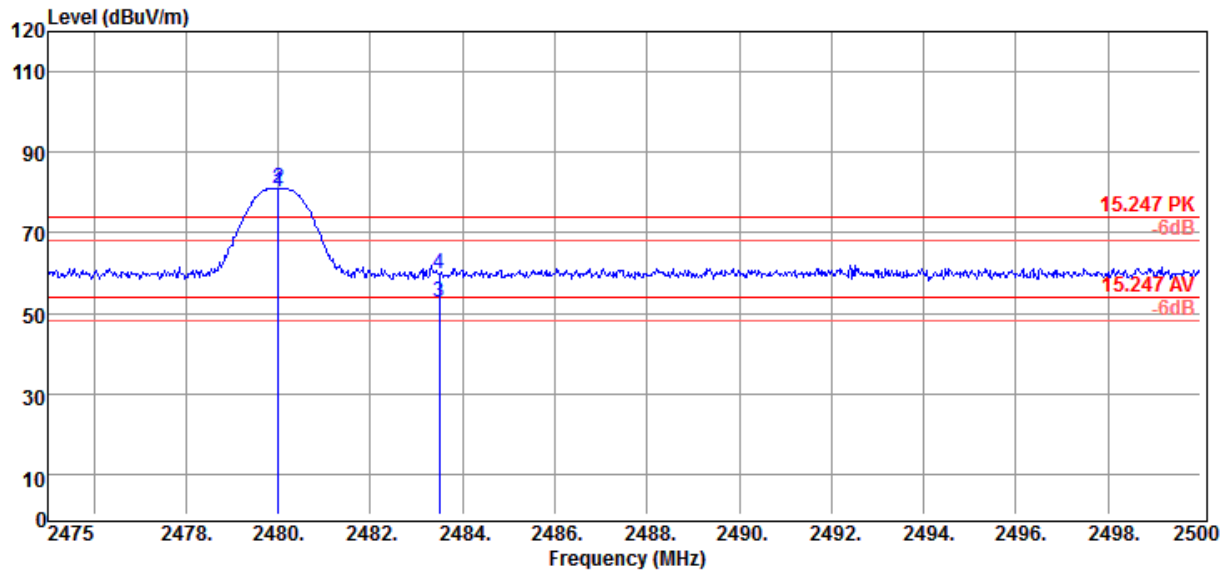

|   | Freq<br>MHz | Meter<br>Level<br>dBUV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBUV/m | Limit<br>Line<br>dBUV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 2480.00     | 43.70                  | 36.45                    | 3.79                | 32.66                     | 0.00                 | 80.15                   | 54.00                   | 26.15        | Average |
| 2 | 2480.00     | 44.41                  | 36.45                    | 3.79                | 32.66                     | 0.00                 | 80.86                   | 74.00                   | 6.86         | Peak    |
| 3 | 2483.50     | 16.34                  | 36.46                    | 3.79                | 32.67                     | 0.00                 | 52.80                   | 54.00                   | -1.20        | Average |
| 4 | 2483.50     | 23.48                  | 36.46                    | 3.79                | 32.67                     | 0.00                 | 59.94                   | 74.00                   | -14.06       | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Vertical

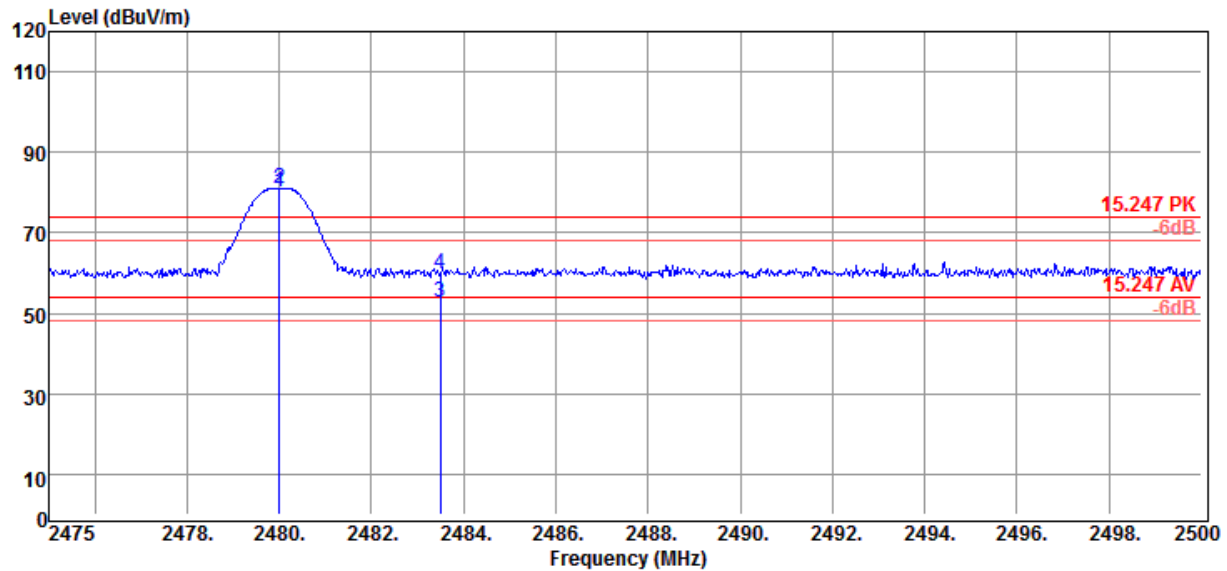

|   | Freq<br>MHz | Meter<br>Level<br>dBuV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 2480.00     | 43.73                  | 36.45                    | 3.79                | 32.66                     | 0.00                 | 80.18                   | 54.00                   | 26.18        | Average |
| 2 | 2480.00     | 44.44                  | 36.45                    | 3.79                | 32.66                     | 0.00                 | 80.89                   | 74.00                   | 6.89         | Peak    |
| 3 | 2483.50     | 16.30                  | 36.46                    | 3.79                | 32.67                     | 0.00                 | 52.76                   | 54.00                   | -1.24        | Average |
| 4 | 2483.50     | 23.27                  | 36.46                    | 3.79                | 32.67                     | 0.00                 | 59.73                   | 74.00                   | -14.27       | Peak    |

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



**BDR 3M**

Lowest Channel- Horizontal

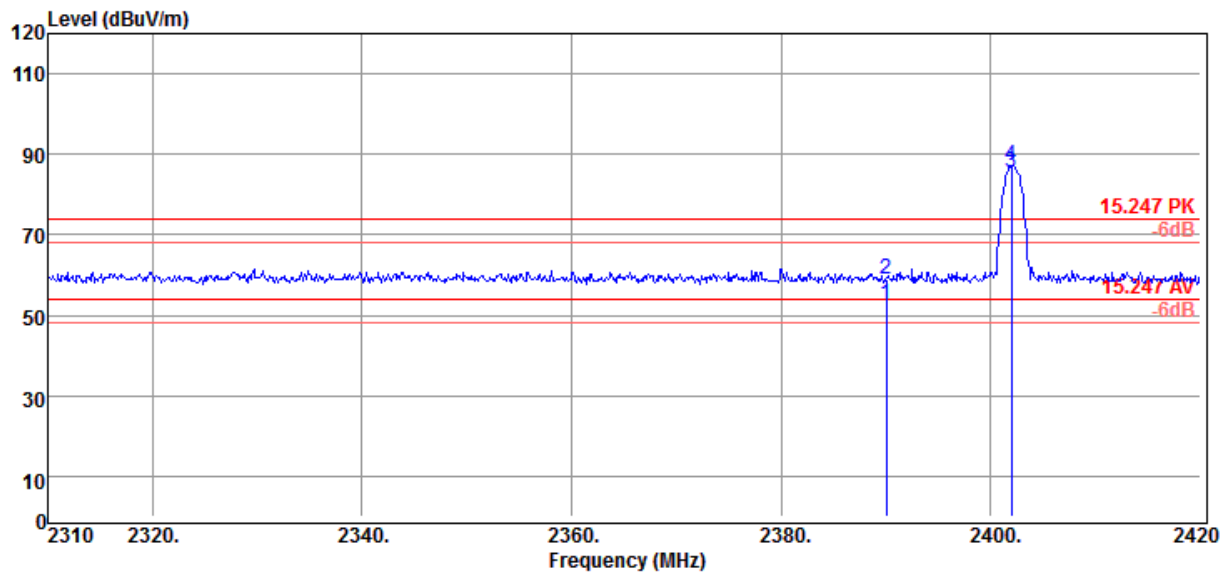

|   | Freq<br>MHz | Meter<br>Level<br>dBuV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 2390.00     | 16.52                  | 36.33                    | 3.83                | 32.50                     | 0.00                 | 52.85                   | 54.00                   | -1.15        | Average |
| 2 | 2390.00     | 22.48                  | 36.33                    | 3.83                | 32.50                     | 0.00                 | 58.81                   | 74.00                   | -15.19       | Peak    |
| 3 | 2402.00     | 49.04                  | 36.34                    | 3.82                | 32.52                     | 0.00                 | 85.38                   | 54.00                   | 31.38        | Average |
| 4 | 2402.00     | 50.81                  | 36.34                    | 3.82                | 32.52                     | 0.00                 | 87.15                   | 74.00                   | 13.15        | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Lowest Channel-Vertical

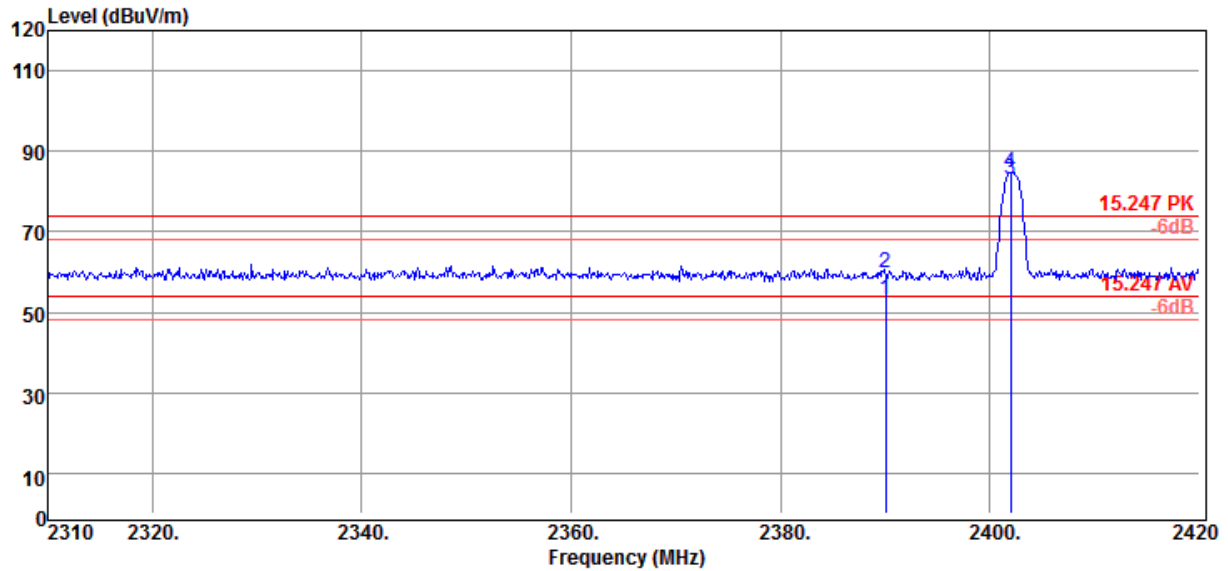

|   | Freq<br>MHz | Meter<br>Level<br>dBUV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBUV/m | Limit<br>Line<br>dBUV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 2390.00     | 16.66                  | 36.33                    | 3.83                | 32.50                     | 0.00                 | 52.99                   | 54.00                   | -1.01        | Average |
| 2 | 2390.00     | 23.60                  | 36.33                    | 3.83                | 32.50                     | 0.00                 | 59.93                   | 74.00                   | -14.07       | Peak    |
| 3 | 2402.00     | 46.70                  | 36.34                    | 3.82                | 32.52                     | 0.00                 | 83.04                   | 54.00                   | 29.04        | Average |
| 4 | 2402.00     | 48.28                  | 36.34                    | 3.82                | 32.52                     | 0.00                 | 84.62                   | 74.00                   | 10.62        | Peak    |

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line





Highest Channel- Horizontal

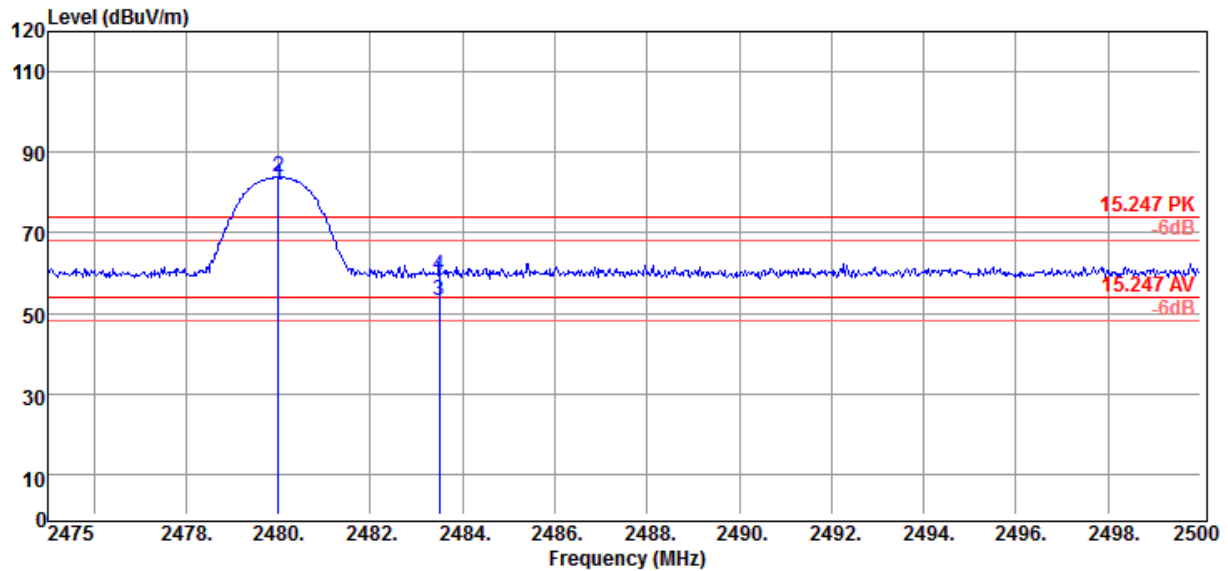

| Freq |         | Meter | System | Cable | Antenna | Preamp | Real   | Limit  | Margin | Remark  |
|------|---------|-------|--------|-------|---------|--------|--------|--------|--------|---------|
| MHz  |         | Level | Factor | Loss  | Factor  | Gain   | Level  | Line   |        |         |
|      |         | dBuV  | dB/m   | dB    | dB/m    | dB     | dBuV/m | dBuV/m | dB     |         |
| 1    | 2480.00 | 45.38 | 36.45  | 3.79  | 32.66   | 0.00   | 81.83  | 54.00  | 27.83  | Average |
| 2    | 2480.00 | 47.43 | 36.45  | 3.79  | 32.66   | 0.00   | 83.88  | 74.00  | 9.88   | Peak    |
| 3    | 2483.50 | 16.63 | 36.46  | 3.79  | 32.67   | 0.00   | 53.09  | 54.00  | -0.91  | Average |
| 4    | 2483.50 | 23.08 | 36.46  | 3.79  | 32.67   | 0.00   | 59.54  | 74.00  | -14.46 | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Vertical

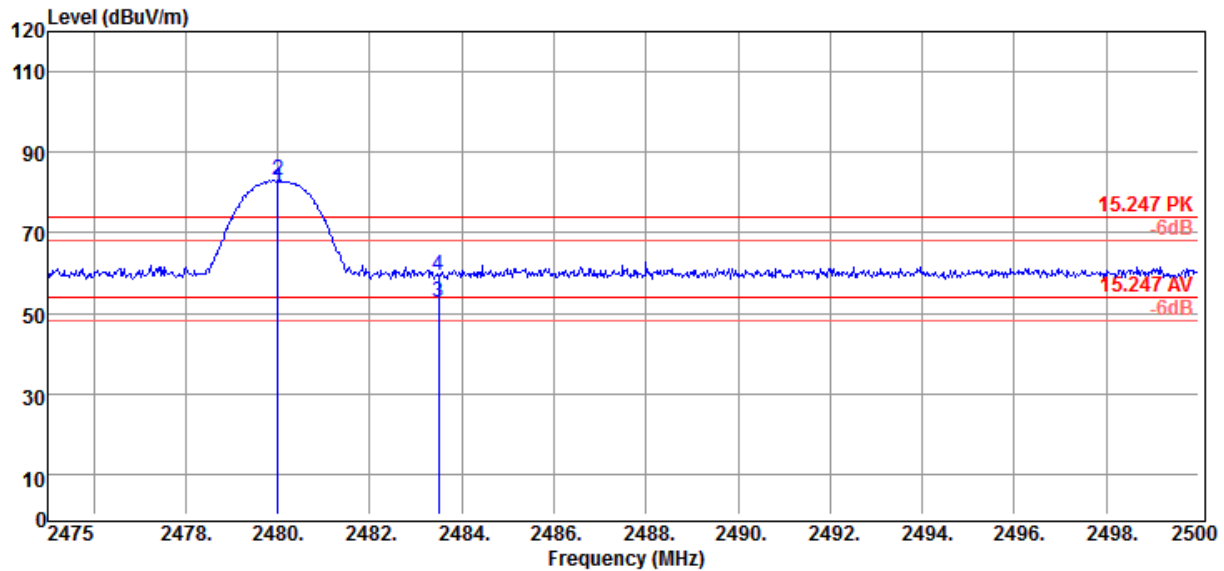

|   | Freq<br>MHz | Meter<br>Level<br>dBuV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 2480.00     | 44.50                  | 36.45                    | 3.79                | 32.66                     | 0.00                 | 80.95                   | 54.00                   | 26.95        | Average |
| 2 | 2480.00     | 46.55                  | 36.45                    | 3.79                | 32.66                     | 0.00                 | 83.00                   | 74.00                   | 9.00         | Peak    |
| 3 | 2483.50     | 16.36                  | 36.46                    | 3.79                | 32.67                     | 0.00                 | 52.82                   | 54.00                   | -1.18        | Average |
| 4 | 2483.50     | 22.81                  | 36.46                    | 3.79                | 32.67                     | 0.00                 | 59.27                   | 74.00                   | -14.73       | Peak    |

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line


Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, PreAmp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, a 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW.
6. Peak detector measurement data will represent the worst case results.



## **7. 20DB BANDWIDTH**

### **7.1 TEST SETUP**

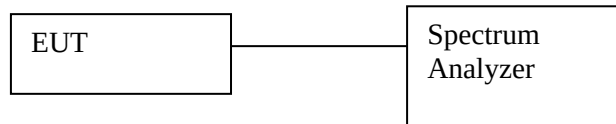

### **7.2 TEST PROCEDURE**

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 300KHz.
- The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### **7.3 LIMIT**

N/A

### **7.4 RESULT: PASS**


### **7.5 TEST DATA:**

#### **BDR 1M**


| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 0.952MHz             |
| 39      | 2441            | 0.967MHz             |
| 78      | 2480            | 0.957MHz             |



Lowest Channel

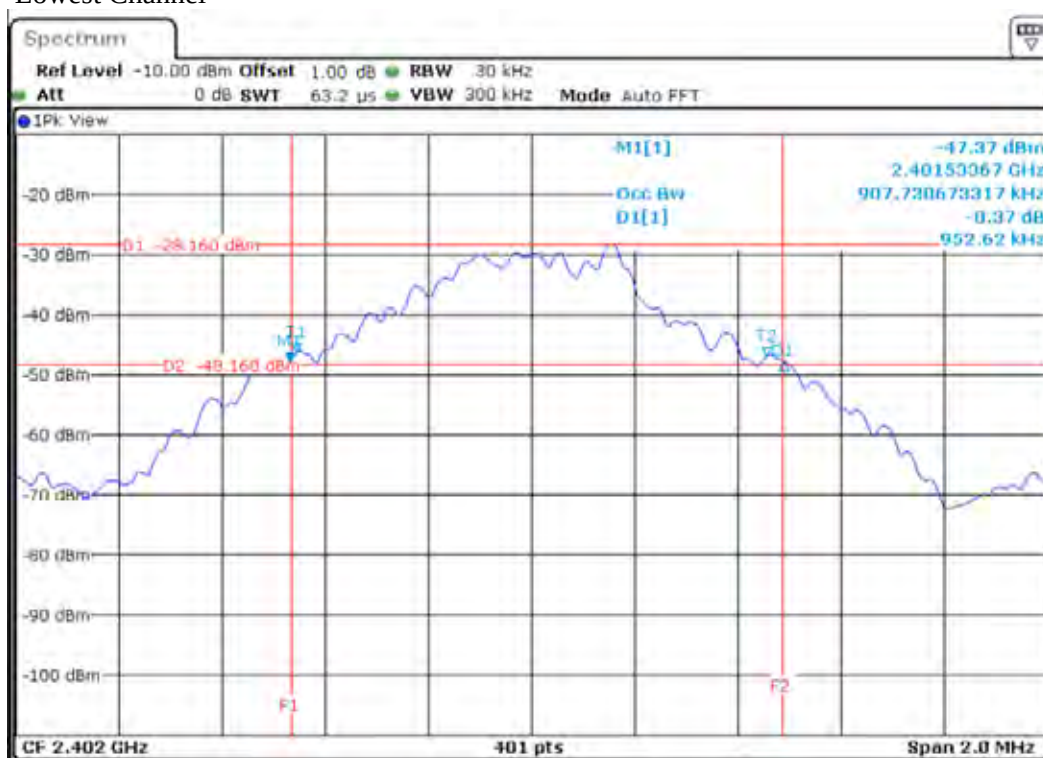

Middle Channel

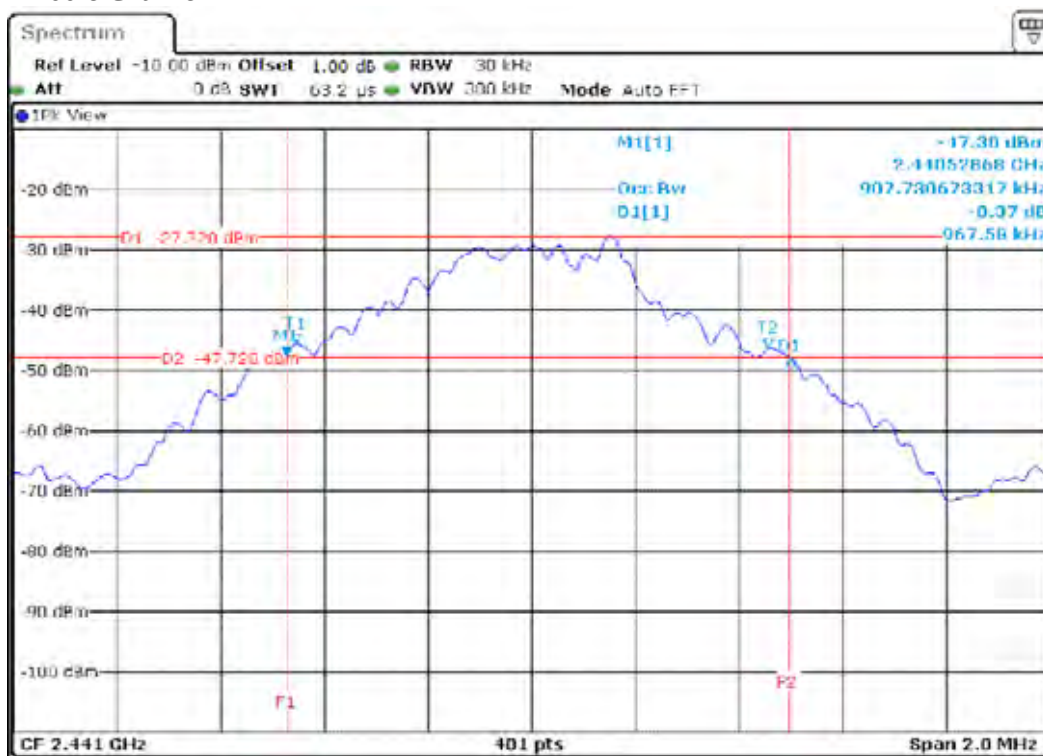



Highest Channel






**BDR 3M**

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 1.326MHz             |
| 39      | 2441            | 1.321MHz             |
| 78      | 2480            | 1.326MHz             |


Lowest Channel

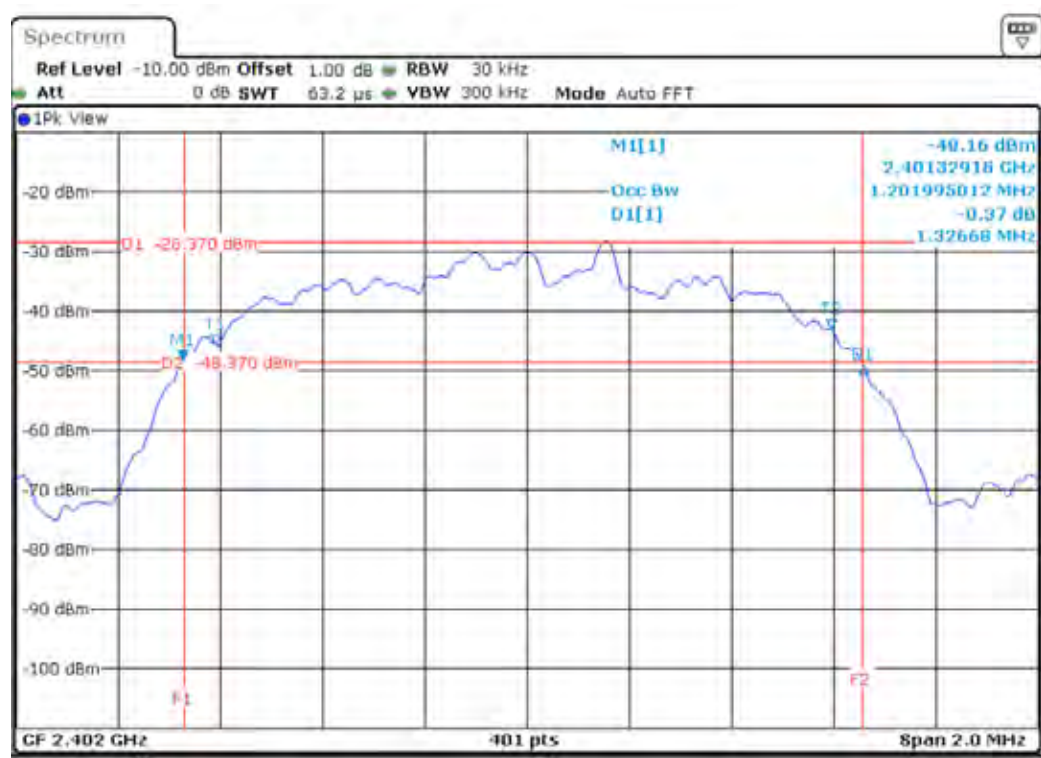






Middle Channel

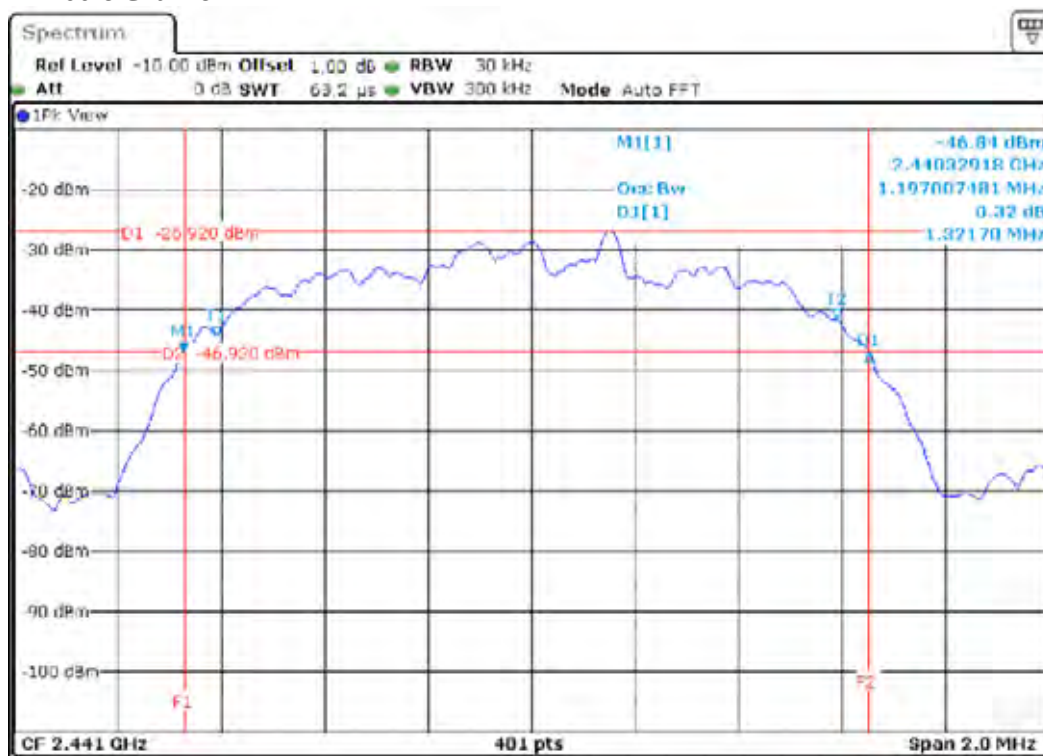


Highest Channel

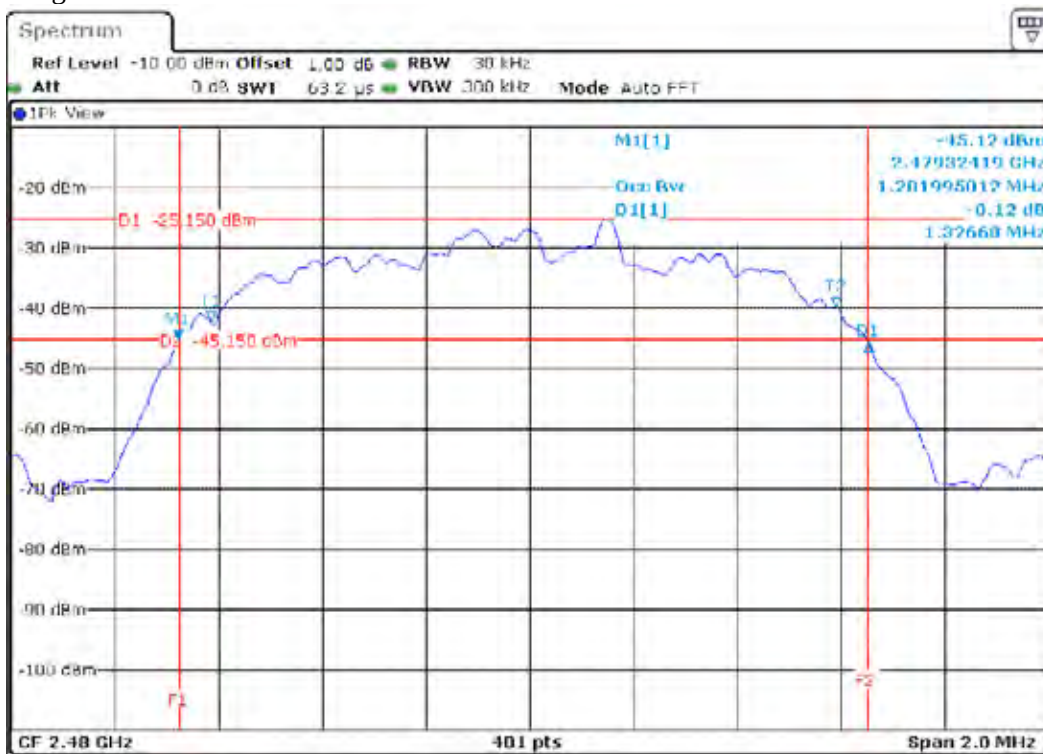

## 8. RADIATED EMISSION

### 8.1 TEST SETUP

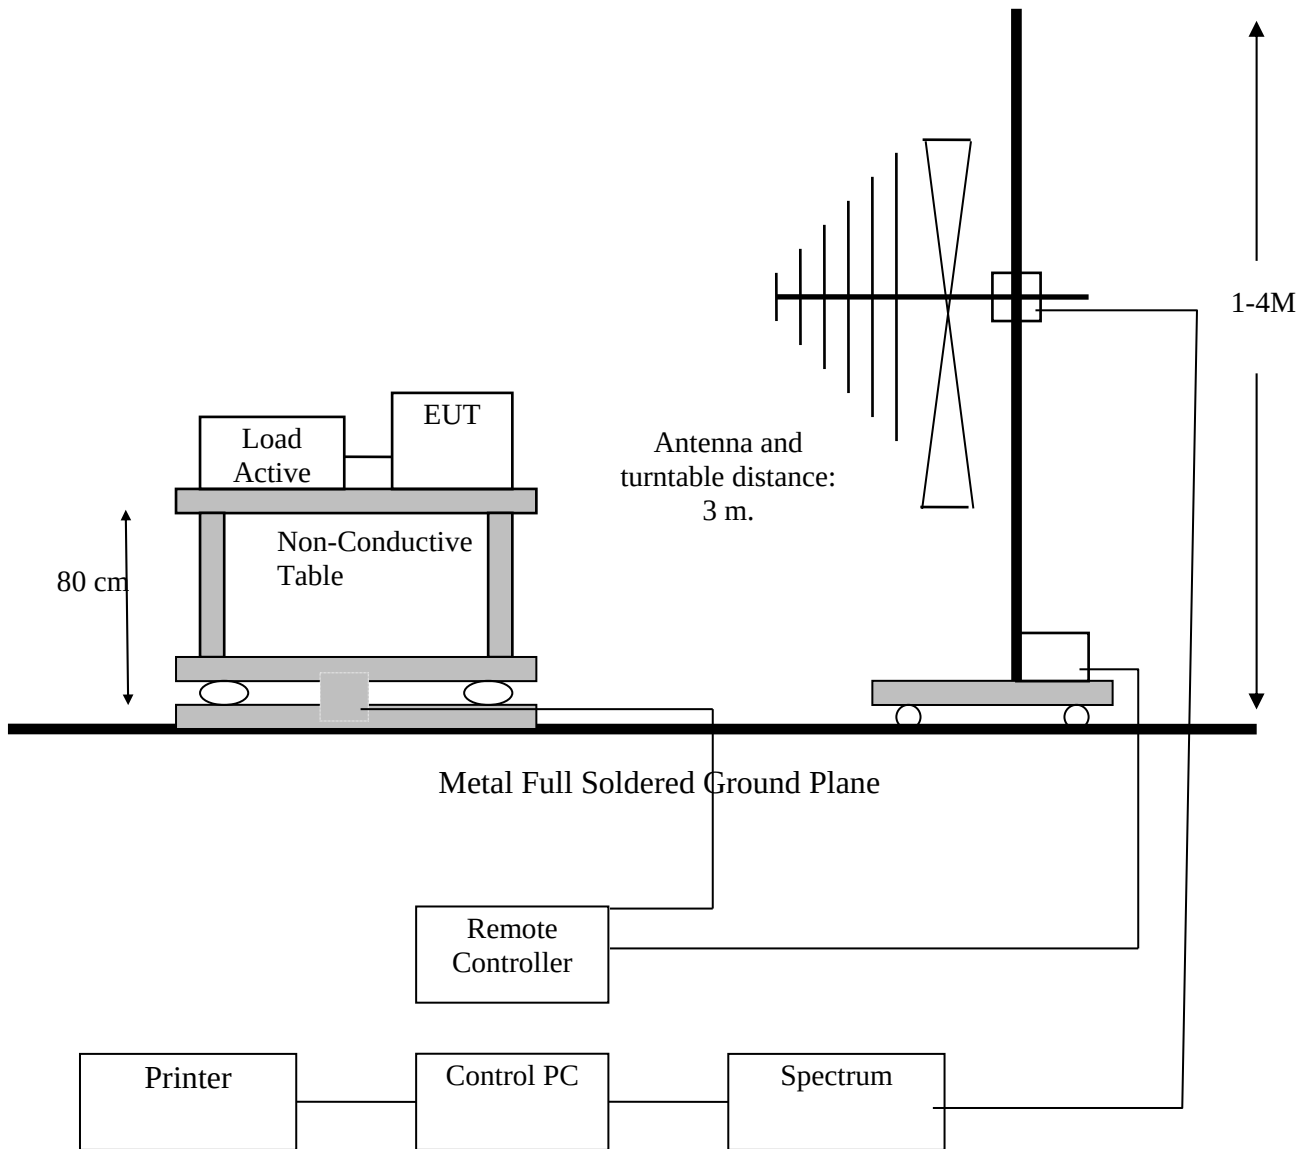





## 8.2 LIMIT

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 as below.

| Frequency (MHz) | Field Strength (mV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 1.705-30        | 30                    | 30                       |
| 30-88           | 100*                  | 3                        |
| 88-216          | 150*                  | 3                        |
| 216-960         | 200*                  | 3                        |
| Above 960       | 500*                  | 3                        |

*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

*In the above emission table, the tighter limit applies at the band edges.*

| Frequency (Hz) | Field Strength<br>( $\mu$ V/m at 3-meter) | Field Strength<br>(dB $\mu$ V/m at 3-meter) |
|----------------|-------------------------------------------|---------------------------------------------|
| 1.705-30       | 30 (at 30-meter)                          | 69.54                                       |
| 30-88          | 100                                       | 40                                          |
| 88-216         | 150                                       | 43                                          |
| 216-960        | 200                                       | 46                                          |
| Above 960      | 500                                       | 54                                          |



### **8.3 TEST PROCEDURE**

1. The EUT was placed on a turntable, which was 0.8m above ground plane.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
6. Repeated above procedures until the measurements for all frequencies are completed.

### **8.4 RESULT: PASS**


### **8.5 TEST DATA:**

All frequencies not described in this test report and within the range of the general radiated emission limits are not detectable significantly. The table as below is representing worst emissions found.



30MHz ~ 1GMz

**Horizontal**

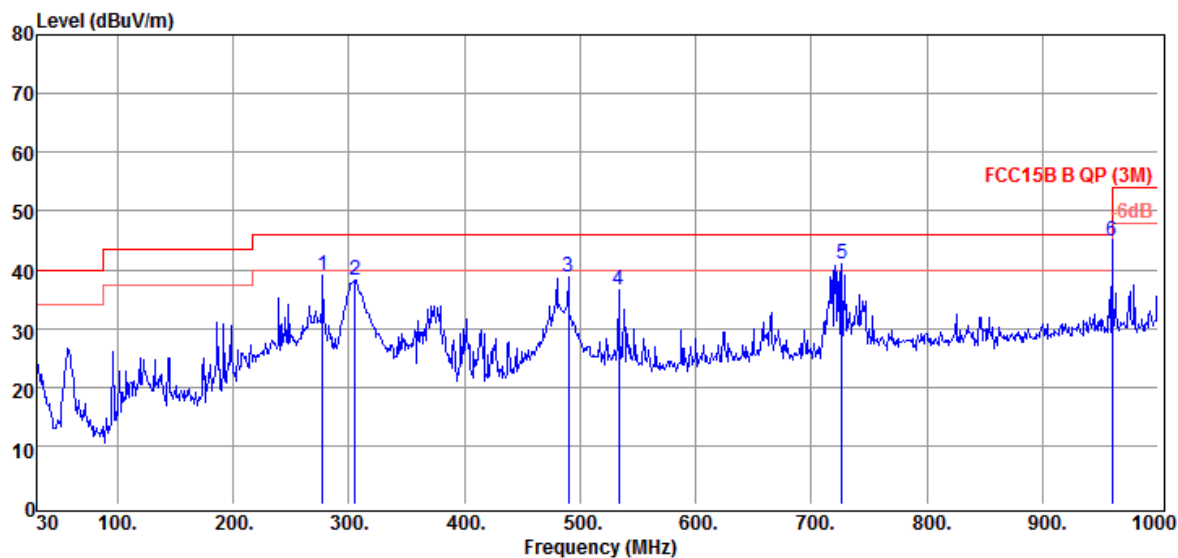

| Freq |        | Meter | System | Cable | Antenna | Preamp | Real   | Limit  | Margin | Remark |
|------|--------|-------|--------|-------|---------|--------|--------|--------|--------|--------|
| MHz  |        | Level | Factor | Loss  | Factor  | Gain   | Level  | Line   |        |        |
|      |        | dBuV  | dB/m   | dB    | dB/m    | dB     | dBuV/m | dBuV/m | dB     |        |
| 1    | 277.35 | 46.14 | -7.09  | 1.66  | 19.75   | 28.50  | 39.05  | 46.00  | -6.95  | Peak   |
| 2    | 305.48 | 44.60 | -6.43  | 1.79  | 20.21   | 28.43  | 38.17  | 46.00  | -7.83  | Peak   |
| 3    | 489.78 | 40.04 | -1.15  | 2.59  | 24.02   | 27.76  | 38.89  | 46.00  | -7.11  | Peak   |
| 4    | 533.43 | 36.75 | -0.22  | 2.64  | 24.67   | 27.53  | 36.53  | 46.00  | -9.47  | Peak   |
| 5    | 726.46 | 37.07 | 4.00   | 3.13  | 27.07   | 26.20  | 41.07  | 46.00  | -4.93  | Peak   |
| 6    | 960.00 | 36.30 | 8.54   | 3.71  | 29.62   | 24.79  | 44.84  | 46.00  | -1.16  | QP     |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



**Vertical**

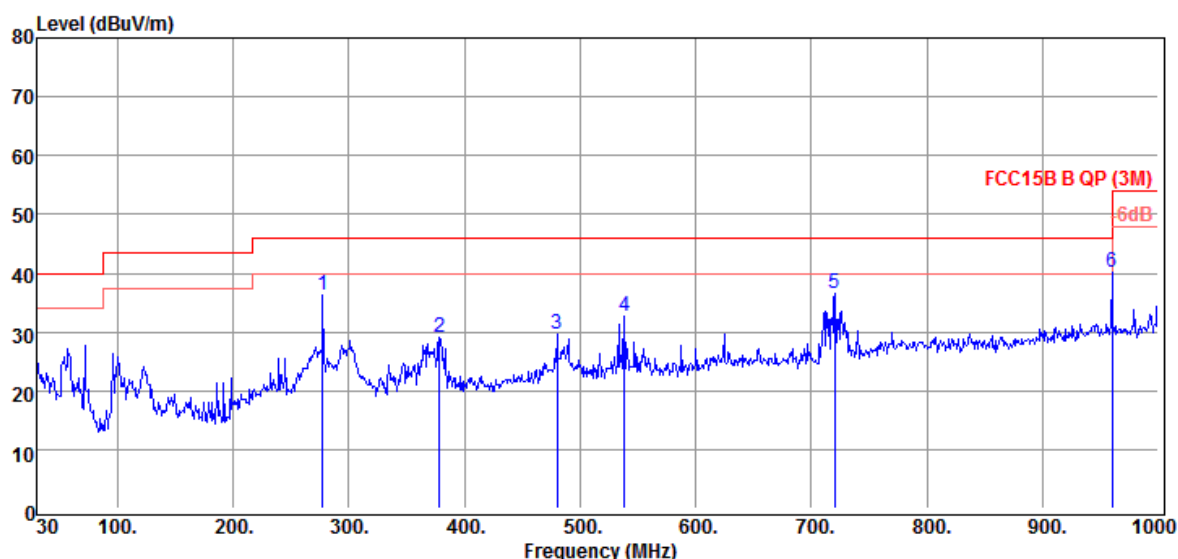

|   | Freq   | Meter | System | Cable | Antenna | Preamp | Real   | Limit  | Margin | Remark |
|---|--------|-------|--------|-------|---------|--------|--------|--------|--------|--------|
|   | MHz    | Level | Factor | Loss  | Factor  | Gain   | Level  | Line   |        |        |
|   |        | dBuV  | dB/m   | dB    | dB/m    | dB     | dBuV/m | dBuV/m | dB     |        |
| 1 | 277.35 | 43.39 | -7.09  | 1.66  | 19.75   | 28.50  | 36.30  | 46.00  | -9.70  | Peak   |
| 2 | 378.23 | 33.28 | -4.17  | 2.22  | 21.78   | 28.17  | 29.11  | 46.00  | -16.89 | Peak   |
| 3 | 480.08 | 31.15 | -1.40  | 2.56  | 23.84   | 27.80  | 29.75  | 46.00  | -16.25 | Peak   |
| 4 | 538.28 | 32.71 | -0.11  | 2.65  | 24.74   | 27.50  | 32.60  | 46.00  | -13.40 | Peak   |
| 5 | 720.64 | 32.64 | 3.88   | 3.12  | 26.99   | 26.23  | 36.52  | 46.00  | -9.48  | Peak   |
| 6 | 960.23 | 31.49 | 8.54   | 3.71  | 29.62   | 24.79  | 40.03  | 54.00  | -13.97 | Peak   |

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line




1GHz ~26.5GHz

**BDR 1M**

Lowest Channel

**Horizontal**

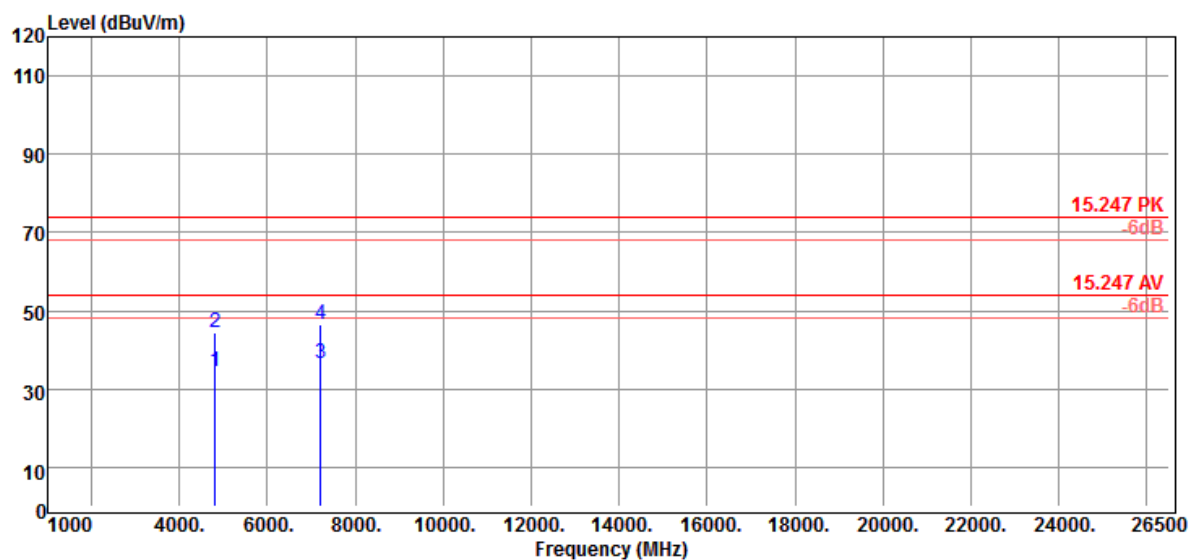

|   | Freq<br>MHz | Meter<br>Level<br>dBuV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 4804.00     | 40.27                  | -6.00                    | 6.26                | 34.58                     | 46.84                | 34.27                   | 54.00                   | -19.73       | Average |
| 2 | 4804.00     | 50.37                  | -6.00                    | 6.26                | 34.58                     | 46.84                | 44.37                   | 74.00                   | -29.63       | Peak    |
| 3 | 7206.00     | 38.97                  | -2.40                    | 8.09                | 35.99                     | 46.48                | 36.57                   | 54.00                   | -17.43       | Average |
| 4 | 7206.00     | 48.88                  | -2.40                    | 8.09                | 35.99                     | 46.48                | 46.48                   | 74.00                   | -27.52       | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



**Vertical**

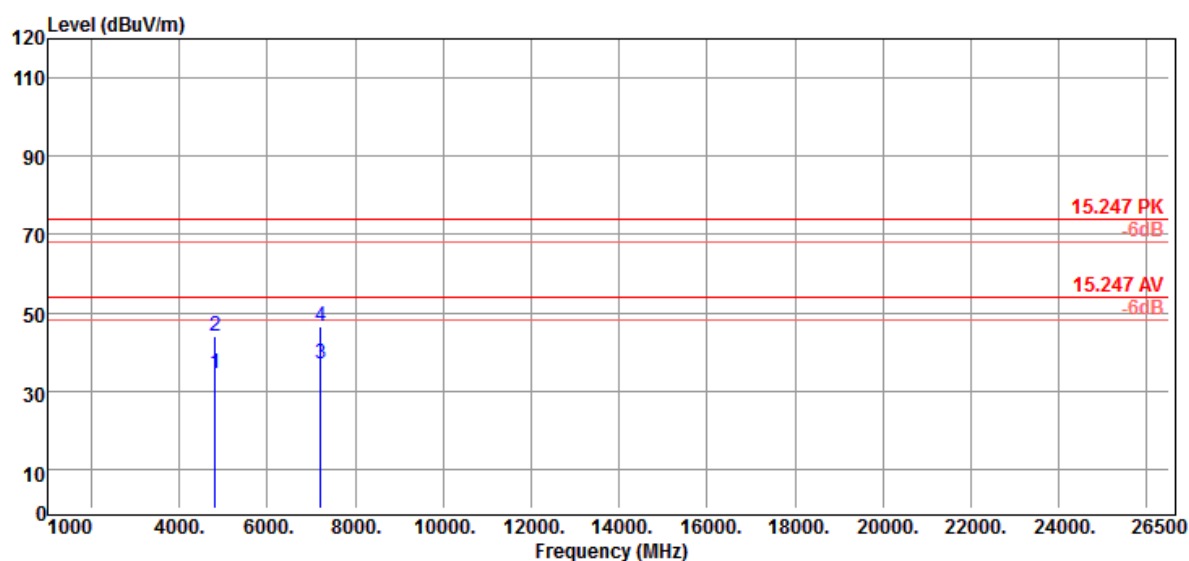

|   | Freq    | Meter | System | Cable | Antenna | Preamp | Real   | Limit  | Margin | Remark  |
|---|---------|-------|--------|-------|---------|--------|--------|--------|--------|---------|
|   | MHz     | Level | Factor | Loss  | Factor  | Gain   | Level  | Line   | dB     |         |
|   |         | dBuV  | dB/m   | dB    | dB/m    | dB     | dBuV/m | dBuV/m |        |         |
| 1 | 4804.00 | 40.26 | -6.00  | 6.26  | 34.58   | 46.84  | 34.26  | 54.00  | -19.74 | Average |
| 2 | 4804.00 | 50.19 | -6.00  | 6.26  | 34.58   | 46.84  | 44.19  | 74.00  | -29.81 | Peak    |
| 3 | 7206.00 | 39.17 | -2.40  | 8.09  | 35.99   | 46.48  | 36.77  | 54.00  | -17.23 | Average |
| 4 | 7206.00 | 48.74 | -2.40  | 8.09  | 35.99   | 46.48  | 46.34  | 74.00  | -27.66 | Peak    |

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Middle Channel

**Horizontal**

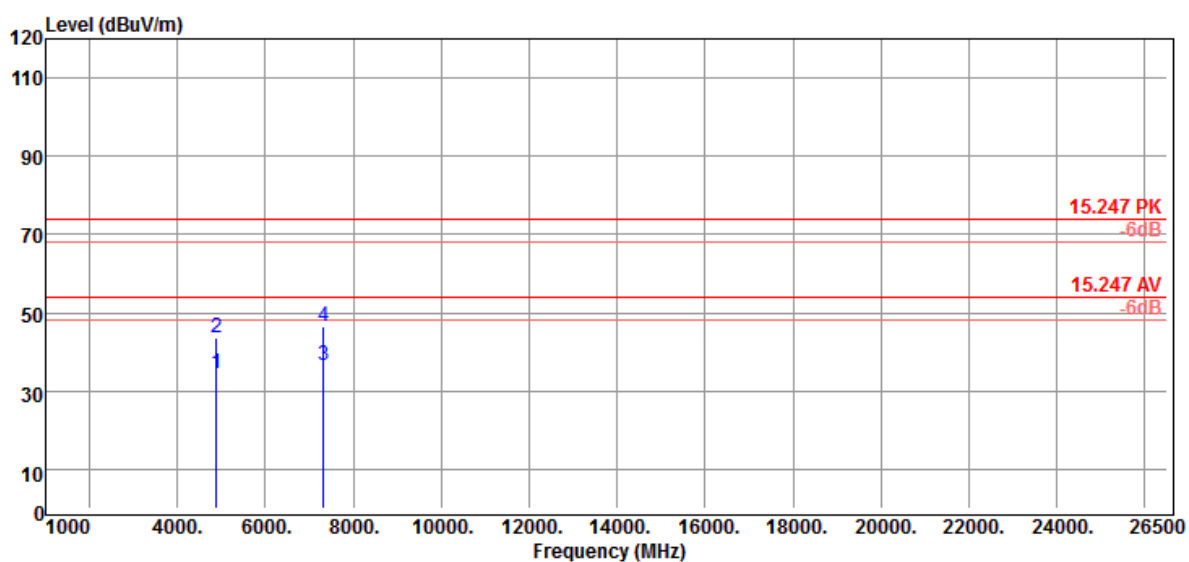

|   | Freq<br>MHz | Meter<br>Level<br>dBuV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 4882.00     | 40.13                  | -5.87                    | 6.32                | 34.63                     | 46.82                | 34.26                   | 54.00                   | -19.74       | Average |
| 2 | 4882.00     | 49.52                  | -5.87                    | 6.32                | 34.63                     | 46.82                | 43.65                   | 74.00                   | -30.35       | Peak    |
| 3 | 7323.00     | 38.68                  | -2.08                    | 8.18                | 36.15                     | 46.41                | 36.60                   | 54.00                   | -17.40       | Average |
| 4 | 7323.00     | 48.77                  | -2.08                    | 8.18                | 36.15                     | 46.41                | 46.69                   | 74.00                   | -27.31       | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



**Vertical**

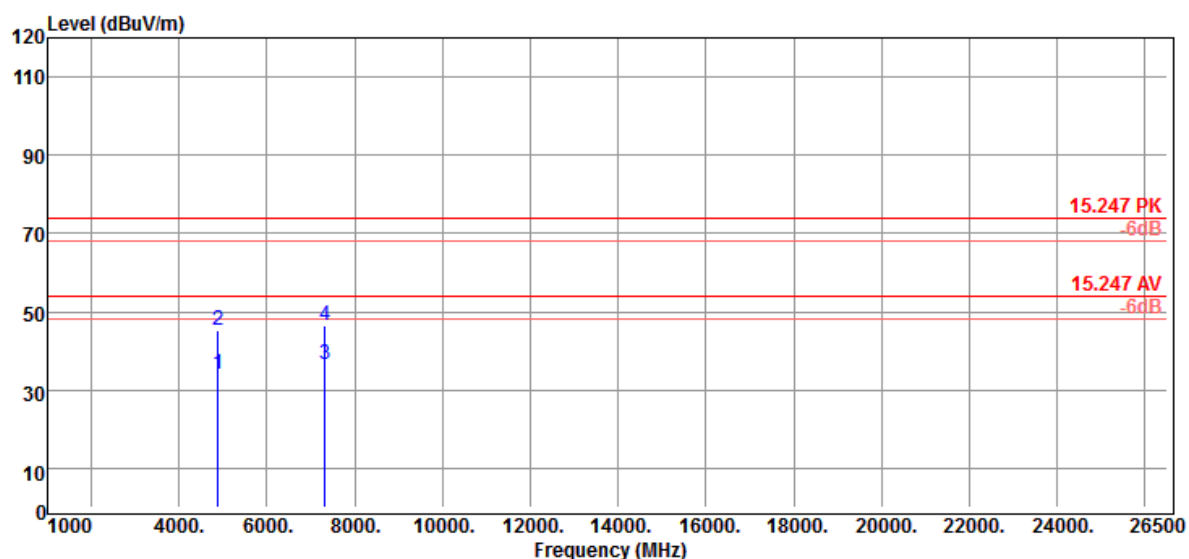

|   | Freq<br>MHz | Meter<br>Level<br>dBuV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 4882.00     | 40.04                  | -5.87                    | 6.32                | 34.63                     | 46.82                | 34.17                   | 54.00                   | -19.83       | Average |
| 2 | 4882.00     | 51.05                  | -5.87                    | 6.32                | 34.63                     | 46.82                | 45.18                   | 74.00                   | -28.82       | Peak    |
| 3 | 7323.00     | 38.62                  | -2.08                    | 8.18                | 36.15                     | 46.41                | 36.54                   | 54.00                   | -17.46       | Average |
| 4 | 7323.00     | 48.78                  | -2.08                    | 8.18                | 36.15                     | 46.41                | 46.70                   | 74.00                   | -27.30       | Peak    |

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line





Highest Channel

**Horizontal**

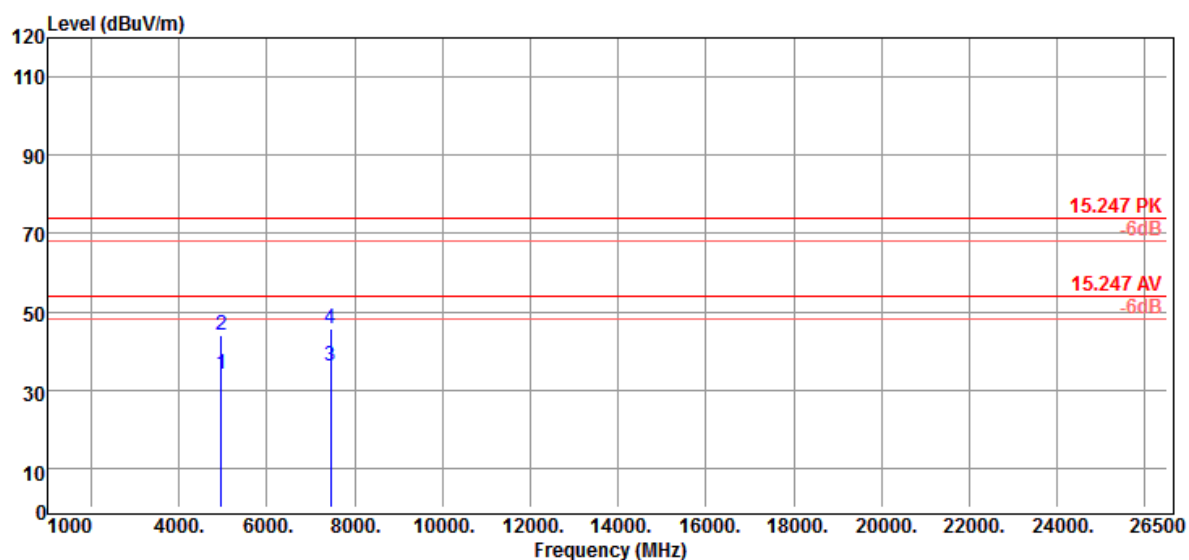

|   | Freq    | Meter | System | Cable | Antenna | Preamp | Real   | Limit  | Margin | Remark  |
|---|---------|-------|--------|-------|---------|--------|--------|--------|--------|---------|
|   | MHz     | Level | Factor | Loss  | Factor  | Gain   | Level  | Line   | dB     |         |
|   |         | dBuV  | dB/m   | dB    | dB/m    | dB     | dBuV/m | dBuV/m |        |         |
| 1 | 4960.00 | 39.97 | -5.75  | 6.38  | 34.68   | 46.81  | 34.22  | 54.00  | -19.78 | Average |
| 2 | 4960.00 | 49.80 | -5.75  | 6.38  | 34.68   | 46.81  | 44.05  | 74.00  | -29.95 | Peak    |
| 3 | 7440.00 | 37.95 | -1.75  | 8.27  | 36.32   | 46.34  | 36.20  | 54.00  | -17.80 | Average |
| 4 | 7440.00 | 47.25 | -1.75  | 8.27  | 36.32   | 46.34  | 45.50  | 74.00  | -28.50 | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



### Vertical

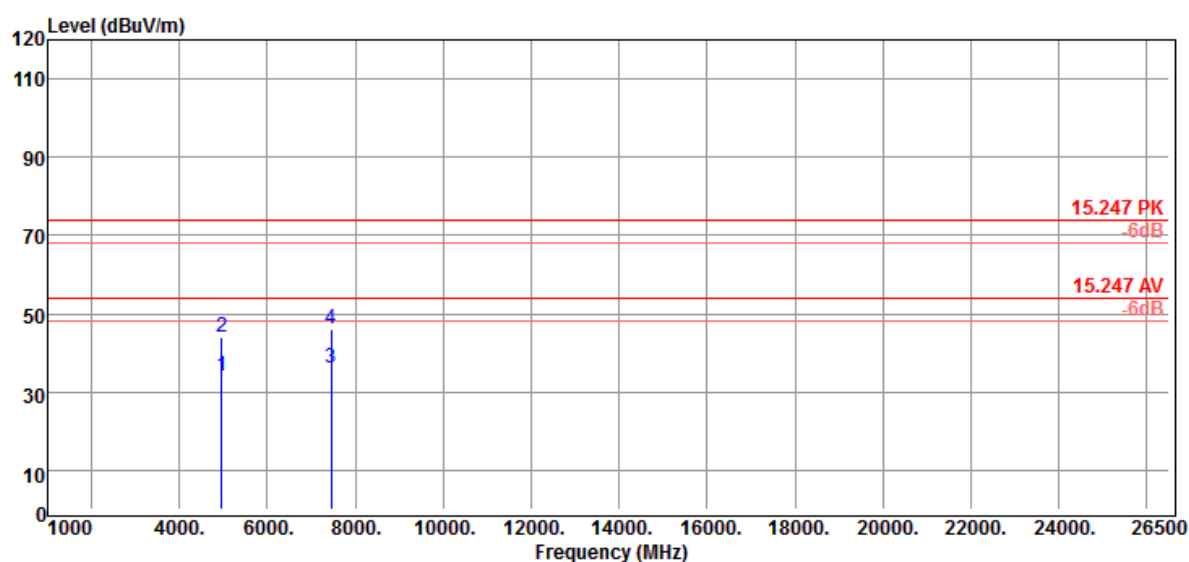

|   | Freq    | Meter | System | Cable | Antenna | Preamp | Real   | Limit  | Margin | Remark  |
|---|---------|-------|--------|-------|---------|--------|--------|--------|--------|---------|
|   | MHz     | Level | Factor | Loss  | Factor  | Gain   | Level  | Line   | dB     |         |
|   |         | dBuV  | dB/m   | dB    | dB/m    | dB     | dBuV/m | dBuV/m |        |         |
| 1 | 4960.00 | 39.99 | -5.75  | 6.38  | 34.68   | 46.81  | 34.24  | 54.00  | -19.76 | Average |
| 2 | 4960.00 | 49.75 | -5.75  | 6.38  | 34.68   | 46.81  | 44.00  | 74.00  | -30.00 | Peak    |
| 3 | 7440.00 | 37.73 | -1.75  | 8.27  | 36.32   | 46.34  | 35.98  | 54.00  | -18.02 | Average |
| 4 | 7440.00 | 47.73 | -1.75  | 8.27  | 36.32   | 46.34  | 45.98  | 74.00  | -28.02 | Peak    |

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



### BDR 3M

Lowest Channel

### Horizontal

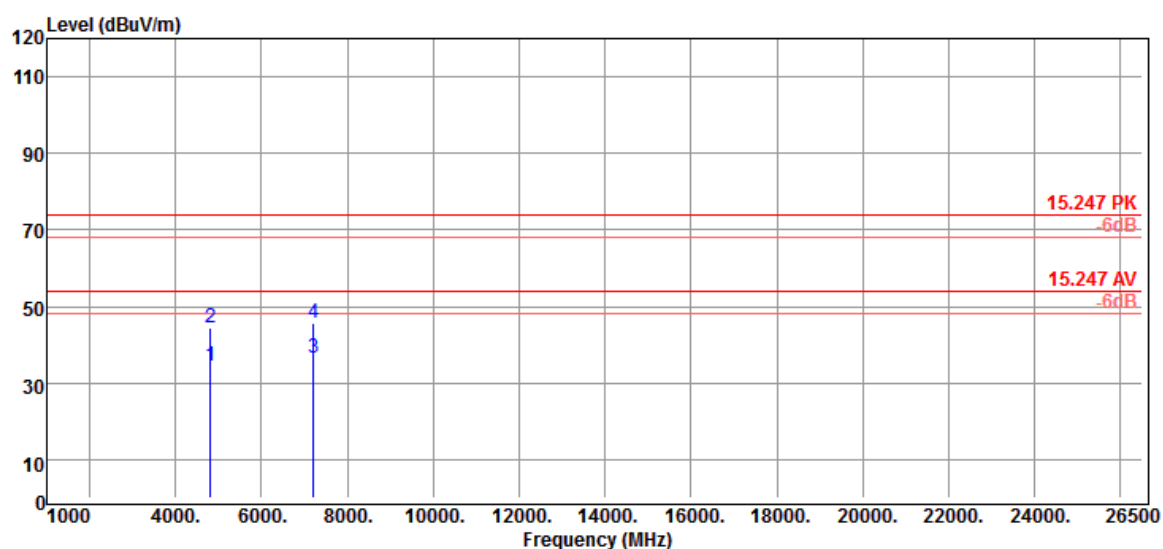

|   | Freq<br>MHz | Meter<br>Level<br>dBuV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 4804.00     | 40.30                  | -6.00                    | 6.26                | 34.58                     | 46.84                | 34.30                   | 54.00                   | -19.70       | Average |
| 2 | 4804.00     | 50.49                  | -6.00                    | 6.26                | 34.58                     | 46.84                | 44.49                   | 74.00                   | -29.51       | Peak    |
| 3 | 7206.00     | 38.76                  | -2.40                    | 8.09                | 35.99                     | 46.48                | 36.36                   | 54.00                   | -17.64       | Average |
| 4 | 7206.00     | 48.20                  | -2.40                    | 8.09                | 35.99                     | 46.48                | 45.80                   | 74.00                   | -28.20       | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



### Vertical

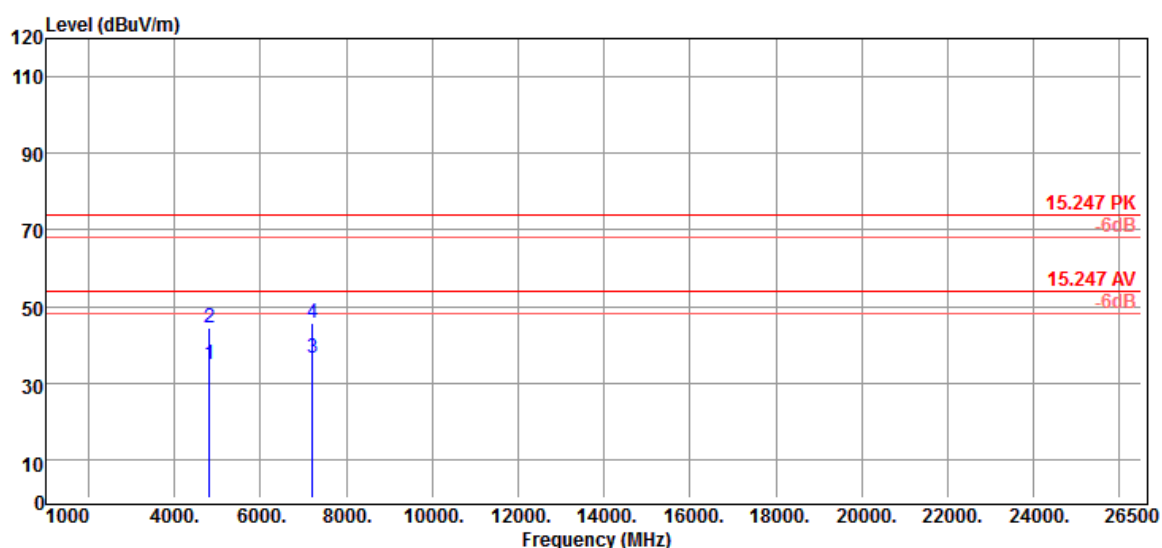

|   | Freq    | Meter | System | Cable | Antenna | Preamp | Real   | Limit  | Margin | Remark  |
|---|---------|-------|--------|-------|---------|--------|--------|--------|--------|---------|
|   | MHz     | Level | Factor | Loss  | Factor  | Gain   | Level  | Line   |        |         |
|   |         | dBuV  | dB/m   | dB    | dB/m    | dB     | dBuV/m | dBuV/m | dB     |         |
| 1 | 4804.00 | 40.79 | -6.00  | 6.26  | 34.58   | 46.84  | 34.79  | 54.00  | -19.21 | Average |
| 2 | 4804.00 | 50.47 | -6.00  | 6.26  | 34.58   | 46.84  | 44.47  | 74.00  | -29.53 | Peak    |
| 3 | 7206.00 | 38.84 | -2.40  | 8.09  | 35.99   | 46.48  | 36.44  | 54.00  | -17.56 | Average |
| 4 | 7206.00 | 48.14 | -2.40  | 8.09  | 35.99   | 46.48  | 45.74  | 74.00  | -28.26 | Peak    |

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Middle Channel

**Horizontal**

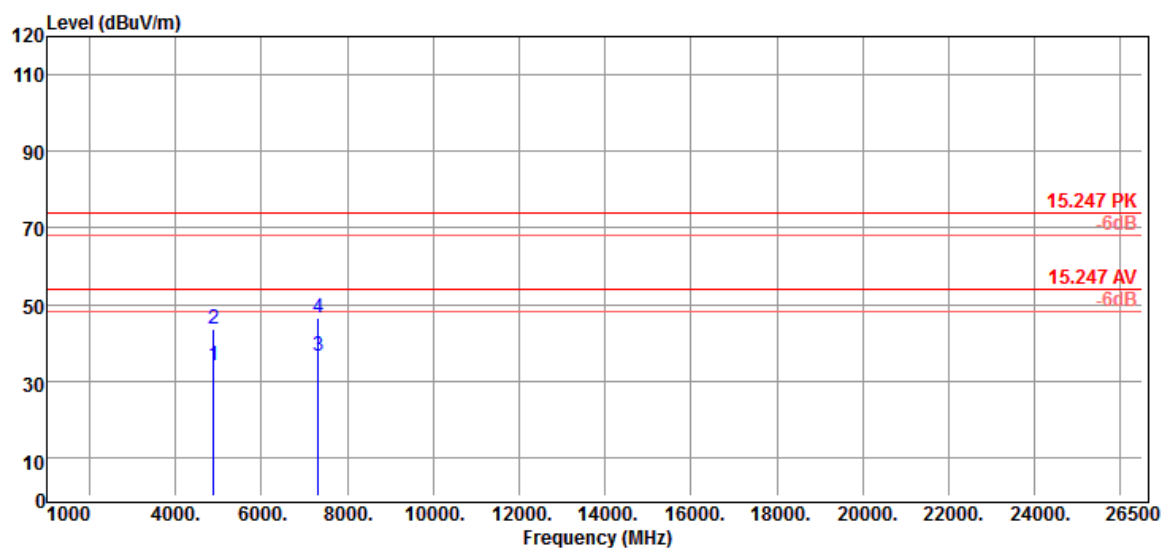

|   | Freq    | Meter | System | Cable | Antenna | Preamp | Real   | Limit  | Margin | Remark  |
|---|---------|-------|--------|-------|---------|--------|--------|--------|--------|---------|
|   | MHz     | Level | Factor | Loss  | Factor  | Gain   | Level  | Line   |        |         |
|   |         | dBuV  | dB/m   | dB    | dB/m    | dB     | dBuV/m | dBuV/m | dB     |         |
| 1 | 4882.00 | 40.03 | -5.87  | 6.32  | 34.63   | 46.82  | 34.16  | 54.00  | -19.84 | Average |
| 2 | 4882.00 | 49.55 | -5.87  | 6.32  | 34.63   | 46.82  | 43.68  | 74.00  | -30.32 | Peak    |
| 3 | 7323.00 | 38.78 | -2.08  | 8.18  | 36.15   | 46.41  | 36.70  | 54.00  | -17.30 | Average |
| 4 | 7323.00 | 48.52 | -2.08  | 8.18  | 36.15   | 46.41  | 46.44  | 74.00  | -27.56 | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor



Margin = Real Level - Limit Line

### Vertical

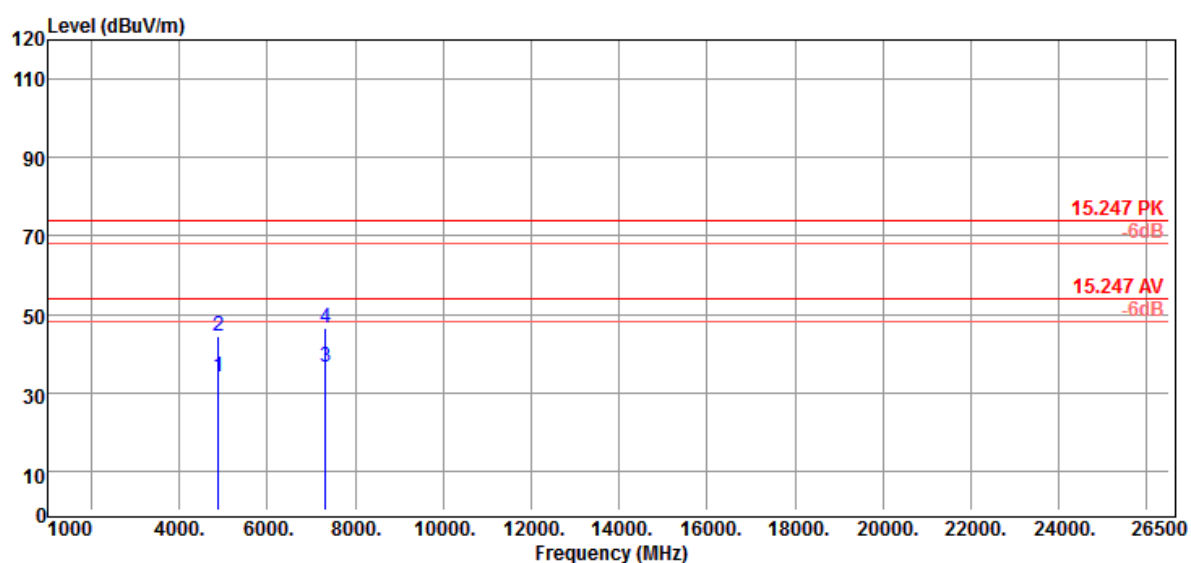

|   | Freq<br>MHz | Meter<br>Level<br>dBuV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 4882.00     | 39.98                  | -5.87                    | 6.32                | 34.63                     | 46.82                | 34.11                   | 54.00                   | -19.89       | Average |
| 2 | 4882.00     | 50.23                  | -5.87                    | 6.32                | 34.63                     | 46.82                | 44.36                   | 74.00                   | -29.64       | Peak    |
| 3 | 7323.00     | 38.74                  | -2.08                    | 8.18                | 36.15                     | 46.41                | 36.66                   | 54.00                   | -17.34       | Average |
| 4 | 7323.00     | 48.58                  | -2.08                    | 8.18                | 36.15                     | 46.41                | 46.50                   | 74.00                   | -27.50       | Peak    |

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel

**Horizontal**

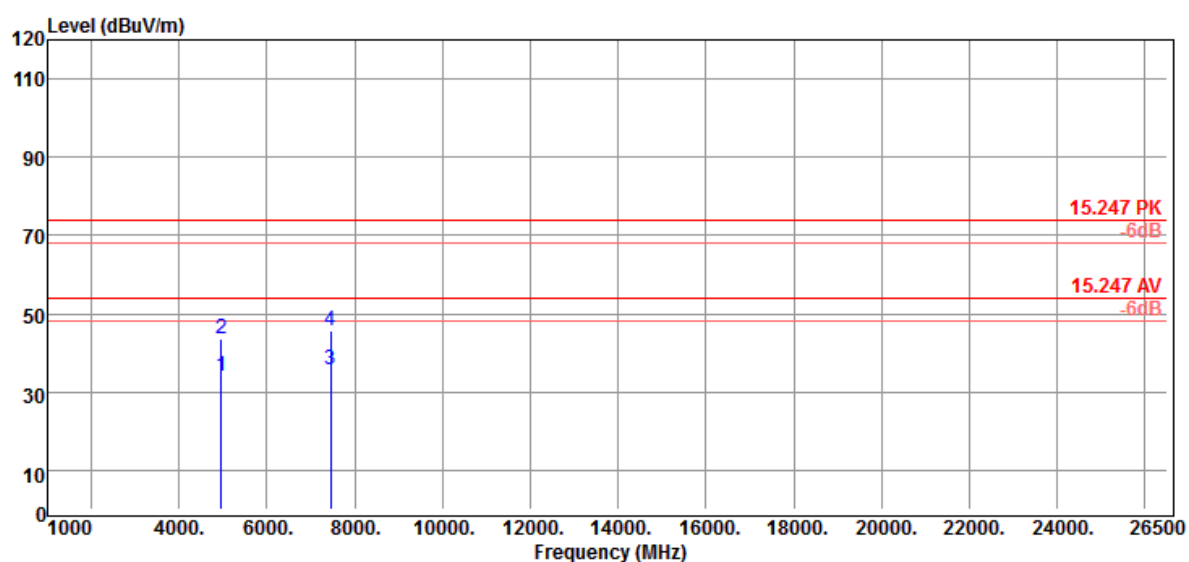

|   | Freq<br>MHz | Meter<br>Level<br>dBuV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 4960.00     | 39.90                  | -5.75                    | 6.38                | 34.68                     | 46.81                | 34.15                   | 54.00                   | -19.85       | Average |
| 2 | 4960.00     | 49.24                  | -5.75                    | 6.38                | 34.68                     | 46.81                | 43.49                   | 74.00                   | -30.51       | Peak    |
| 3 | 7440.00     | 37.67                  | -1.75                    | 8.27                | 36.32                     | 46.34                | 35.92                   | 54.00                   | -18.08       | Average |
| 4 | 7440.00     | 47.38                  | -1.75                    | 8.27                | 36.32                     | 46.34                | 45.63                   | 74.00                   | -28.37       | Peak    |


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



### Vertical

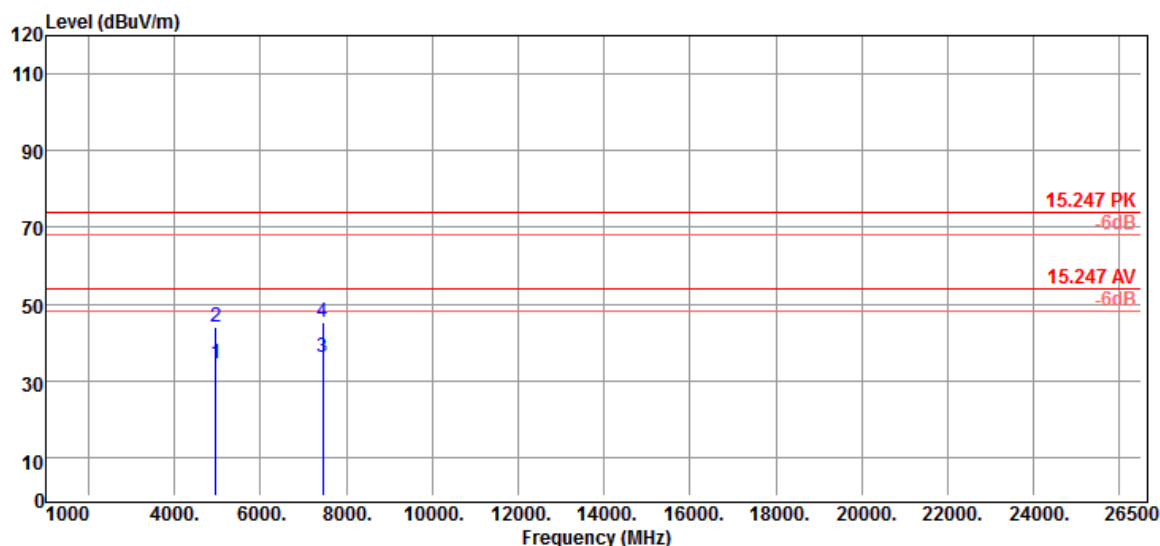

|   | Freq<br>MHz | Meter<br>Level<br>dBuV | System<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Antenna<br>Factor<br>dB/m | Preamp<br>Gain<br>dB | Real<br>Level<br>dBuV/m | Limit<br>Line<br>dBuV/m | Margin<br>dB | Remark  |
|---|-------------|------------------------|--------------------------|---------------------|---------------------------|----------------------|-------------------------|-------------------------|--------------|---------|
| 1 | 4960.00     | 40.40                  | -5.75                    | 6.38                | 34.68                     | 46.81                | 34.65                   | 54.00                   | -19.35       | Average |
| 2 | 4960.00     | 49.70                  | -5.75                    | 6.38                | 34.68                     | 46.81                | 43.95                   | 74.00                   | -30.05       | Peak    |
| 3 | 7440.00     | 37.79                  | -1.75                    | 8.27                | 36.32                     | 46.34                | 36.04                   | 54.00                   | -17.96       | Average |
| 4 | 7440.00     | 47.22                  | -1.75                    | 8.27                | 36.32                     | 46.34                | 45.47                   | 74.00                   | -28.53       | Peak    |

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, PreAmp, etc.






3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements from 9 kHz to 150 kHz, Peak detector setting: 100 Hz RBW
5. Measurements from 150 kHz to 30MHz, Peak detector setting: 10 kHz RBW
6. Measurements from 30 MHz to 1000 MHz, Peak detector setting: 100 kHz RBW
7. Measurements from 9 kHz to 150 kHz, CISPR Quasi-Peak detector: 200 Hz RBW
8. Measurements from 150 kHz to 30MHz, CISPR Quasi-Peak detector: 9 kHz RBW
9. Measurements from 30 MHz to 1000 MHz, CISPR Quasi-Peak detector: 120 kHz RBW
10. Peak detector measurement data will represent the worst case results.



## 9. CONDUCTED EMISSIONS

### 9.1 TEST SETUP

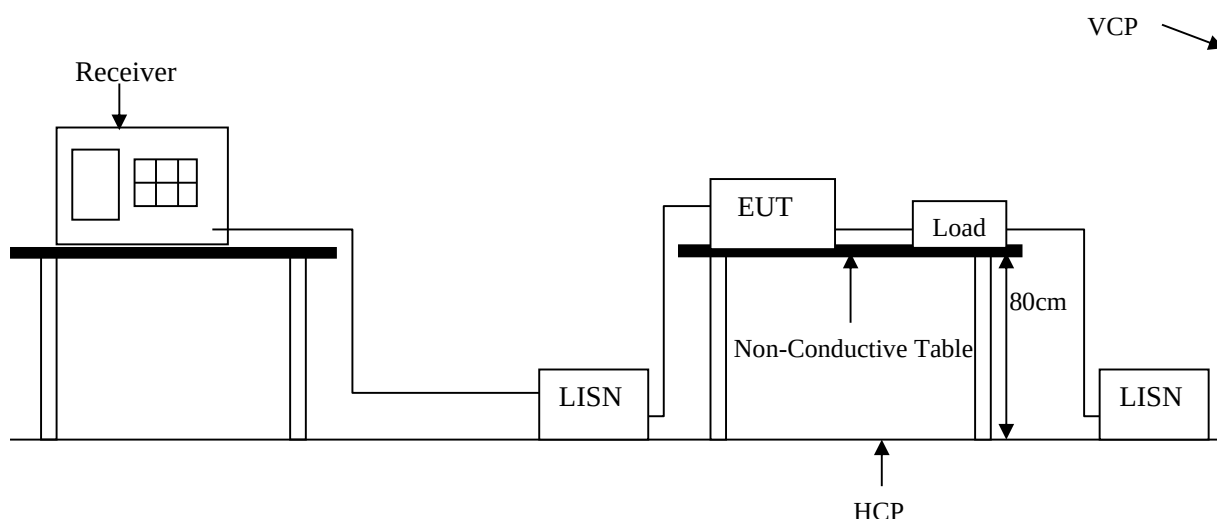

### 9.2 LIMIT

| Frequency range<br>(MHz) | CLASS A      |                   | CLASS B      |                   |
|--------------------------|--------------|-------------------|--------------|-------------------|
|                          | QP<br>dB(uV) | Average<br>dB(uV) | QP<br>dB(uV) | Average<br>dB(uV) |
| 0.15-0.5                 | 79 dBuV      | 66 dBuV           | 66 - 56 dBuV | 56 - 46 dBuV      |
| 0.5-5.0                  | 73 dBuV      | 60 dBuV           | 56 dBuV      | 46 dBuV           |
| 5.0-30.0                 | 73 dBuV      | 60 dBuV           | 60 dBuV      | 50 dBuV           |

Remark: In the above table, the tighter limit applies at the band edges.

### 9.3 TEST PROCEDURE

The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). It provides a 50 ohm / 50  $\mu$ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm / 50  $\mu$ H coupling impedance with 50 ohm termination. (Please refer to the block diagram of the test setup and photograph.)

Both sides of AC line are checked for the maximum conducted emission interference. In order to find the maximum emissions, the relating positions of equipment and all of the interference cables must be changed according to EN 55022 regulations: The measurement procedure on conducted emission interference.

The resolution bandwidth of the field strength meter is set at 9 KHz.

### 9.4 TEST SPECIFICATION


According to PART15.207



**9.5 RESULT: PASS**

**9.6 TEST DATA:**

LINE

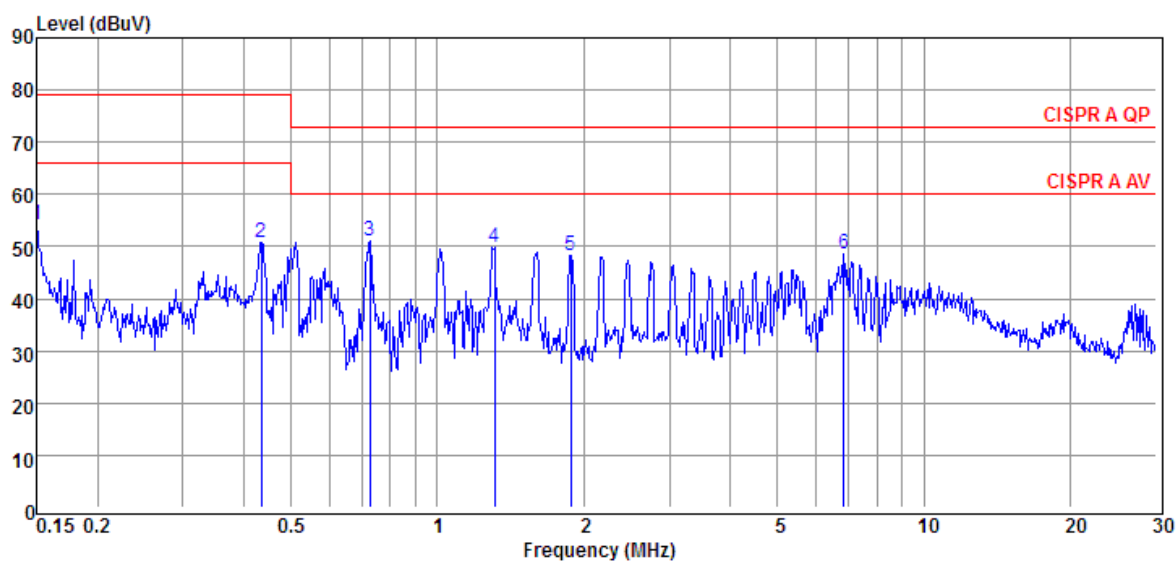


|   | Freq<br>MHz | Meter<br>Level<br>dBUV | System<br>Factor<br>dB | Cable<br>Loss<br>dB | LISN<br>Factor<br>dB | Real Level<br>dBUV | Limit<br>Line<br>dBUV | Margin<br>dB | Remark |
|---|-------------|------------------------|------------------------|---------------------|----------------------|--------------------|-----------------------|--------------|--------|
| 1 | 0.15        | 34.23                  | 20.11                  | 20.10               | 0.01                 | 54.34              | 79.00                 | -24.66       | Peak   |
| 2 | 0.44        | 30.64                  | 20.16                  | 20.14               | 0.02                 | 50.80              | 79.00                 | -28.20       | Peak   |
| 3 | 0.73        | 30.77                  | 20.20                  | 20.17               | 0.03                 | 50.97              | 73.00                 | -22.03       | Peak   |
| 4 | 1.31        | 29.68                  | 20.24                  | 20.21               | 0.03                 | 49.92              | 73.00                 | -23.08       | Peak   |
| 5 | 1.88        | 28.05                  | 20.27                  | 20.23               | 0.04                 | 48.32              | 73.00                 | -24.68       | Peak   |
| 6 | 6.84        | 28.05                  | 20.51                  | 20.39               | 0.12                 | 48.56              | 73.00                 | -24.44       | Peak   |

System Factor = Cable Loss + ISN Factor  
Cable Loss = Pulse limiter + Insertion Loss  
Real Level = Meter Level + System Factor  
Margin = Real Level - Limit Line



NEUTRAL

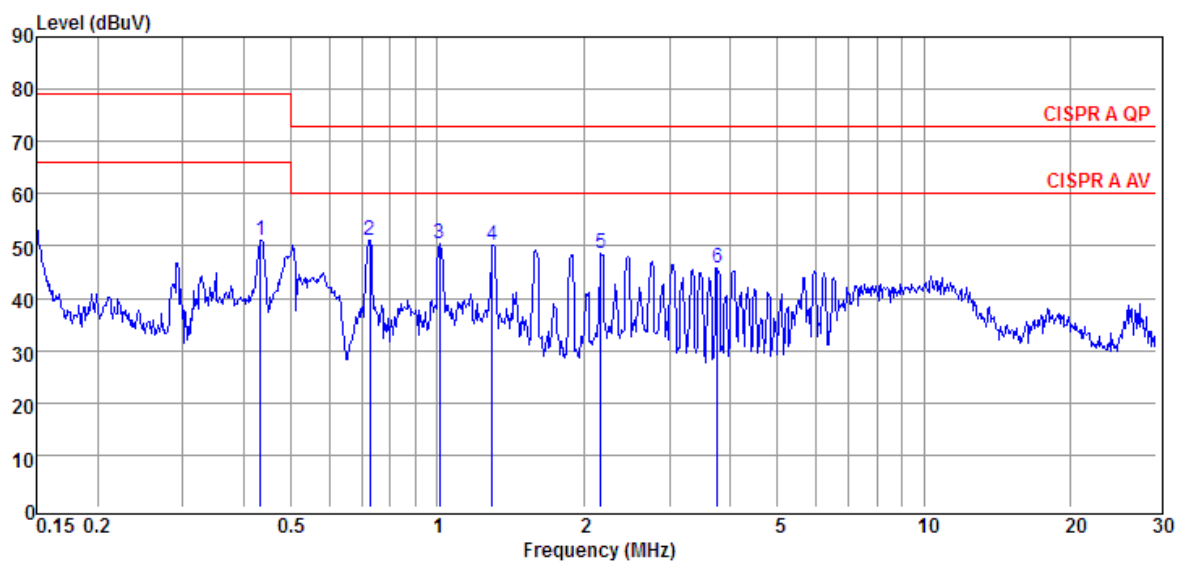

|   | Freq<br>MHz | Meter<br>Level<br>dBUV | System<br>Factor<br>dB | Cable<br>Loss<br>dB | LISN<br>Factor<br>dB | Real Level<br>dBUV | Limit<br>Line<br>dBUV | Margin<br>dB | Remark |
|---|-------------|------------------------|------------------------|---------------------|----------------------|--------------------|-----------------------|--------------|--------|
| 1 | 0.43        | 30.81                  | 20.17                  | 20.14               | 0.03                 | 50.98              | 79.00                 | -28.02       | Peak   |
| 2 | 0.73        | 30.94                  | 20.21                  | 20.17               | 0.04                 | 51.15              | 73.00                 | -21.85       | Peak   |
| 3 | 1.01        | 30.30                  | 20.23                  | 20.19               | 0.04                 | 50.53              | 73.00                 | -22.47       | Peak   |
| 4 | 1.30        | 29.83                  | 20.25                  | 20.20               | 0.05                 | 50.08              | 73.00                 | -22.92       | Peak   |
| 5 | 2.17        | 28.26                  | 20.30                  | 20.24               | 0.06                 | 48.56              | 73.00                 | -24.44       | Peak   |
| 6 | 3.76        | 25.45                  | 20.38                  | 20.29               | 0.09                 | 45.83              | 73.00                 | -27.17       | Peak   |

System Factor = Cable Loss + ISN Factor

Cable Loss = Pulse limiter + Insertion Loss


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



## **10. SPURIOUS EMISSIONS**

### **10.1 TEST SETUP**

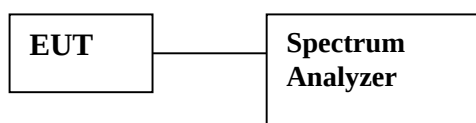

### **10.2 LIMIT**

According to § 15.247(d) , in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating , the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power , based on either an RF conducted or a radiated measurement , provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands , as defined in § 15.205(a) , must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### **10.3 TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13 GHz to 26GHz range for IEEE 802.11b/g.


### **10.4 TEST RESULTS: PASS**



## 10.5 TEST DATA:


### BDR 1M

Lowest Channel

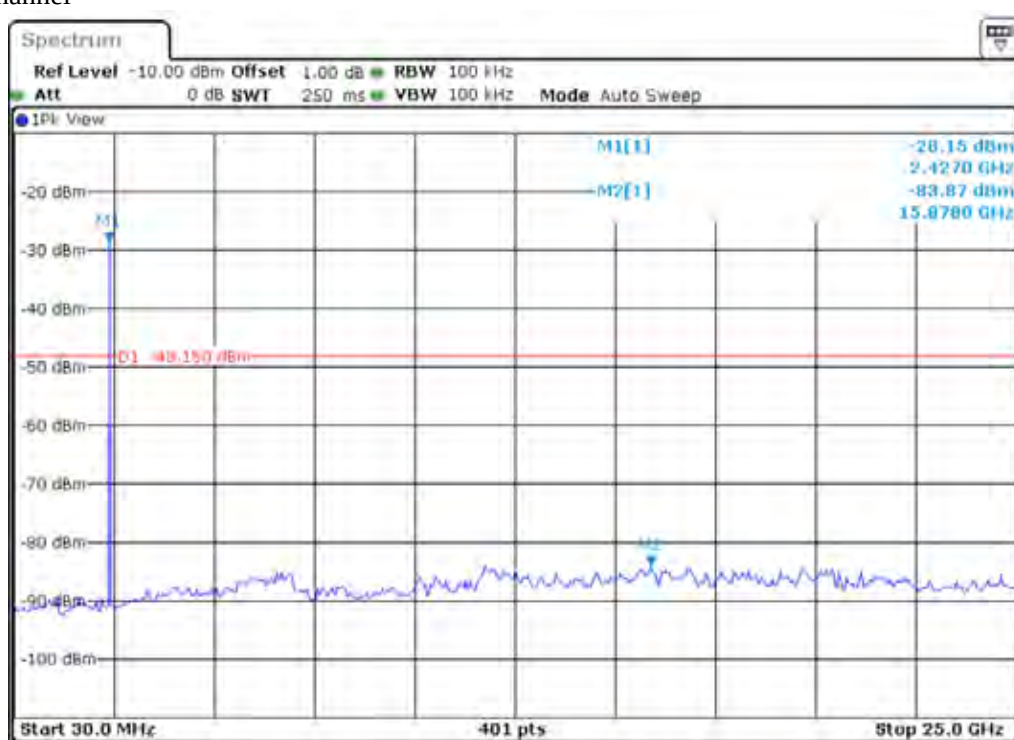




Middle Channel

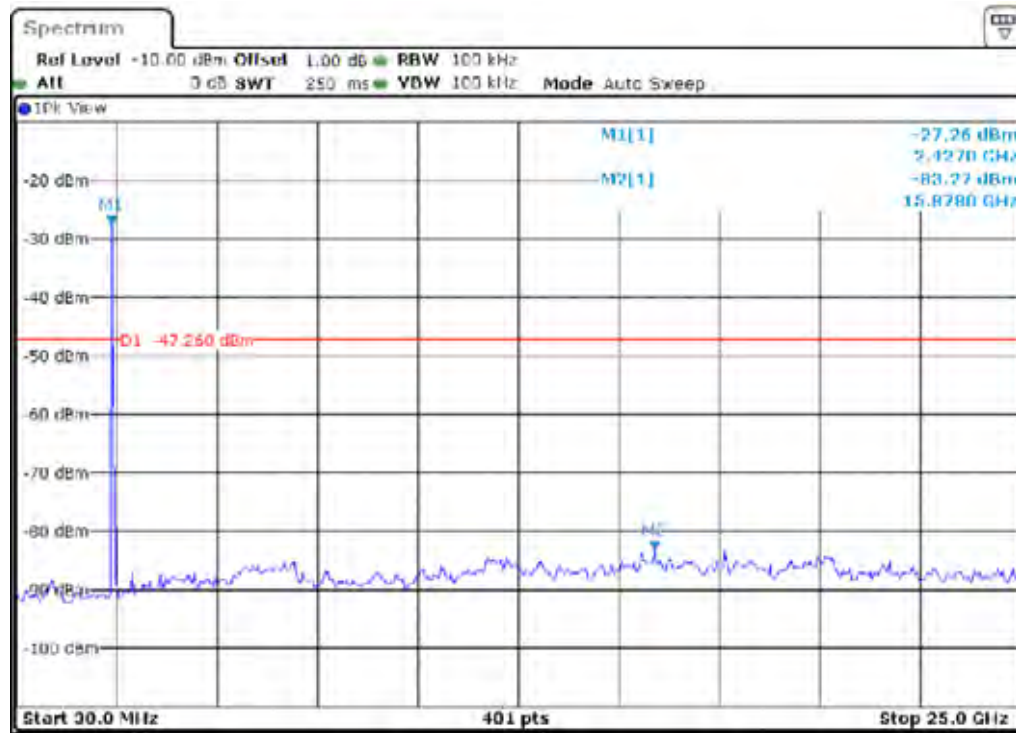


Highest Channel

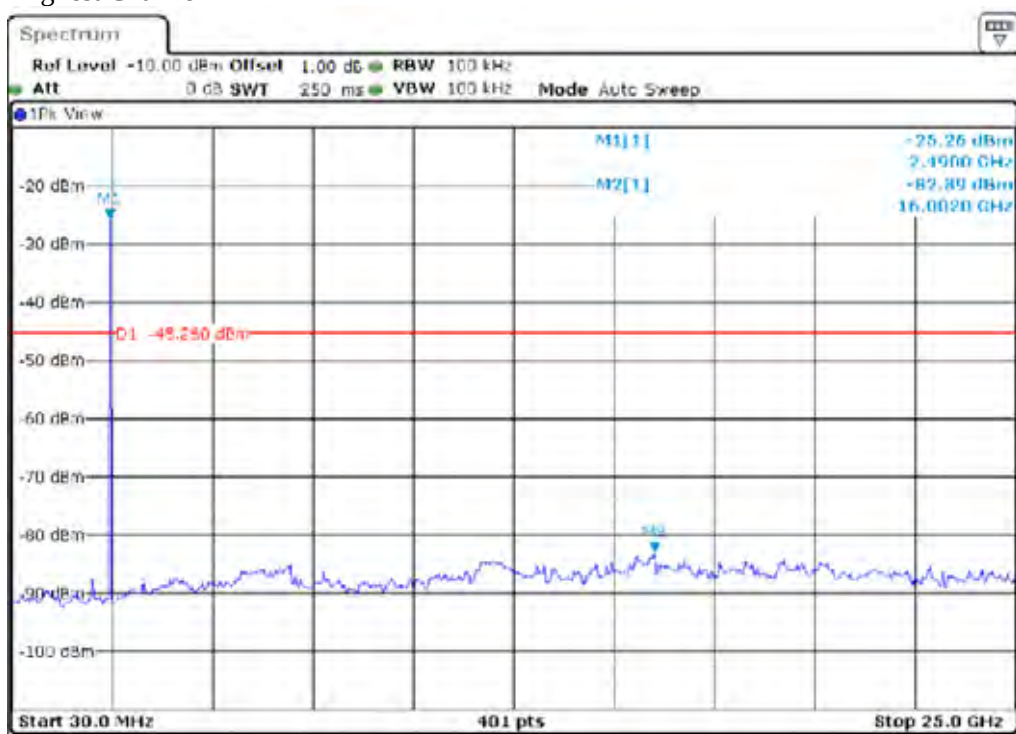




**BDR 3M**

**Lowest Channel**

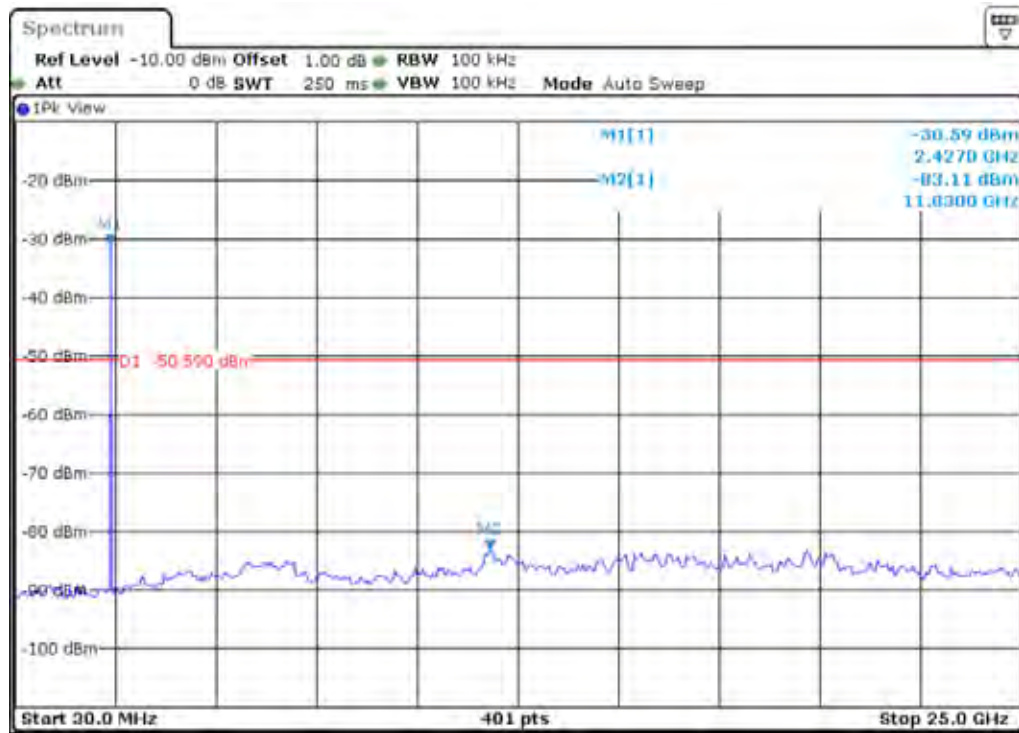


**Middle Channel**



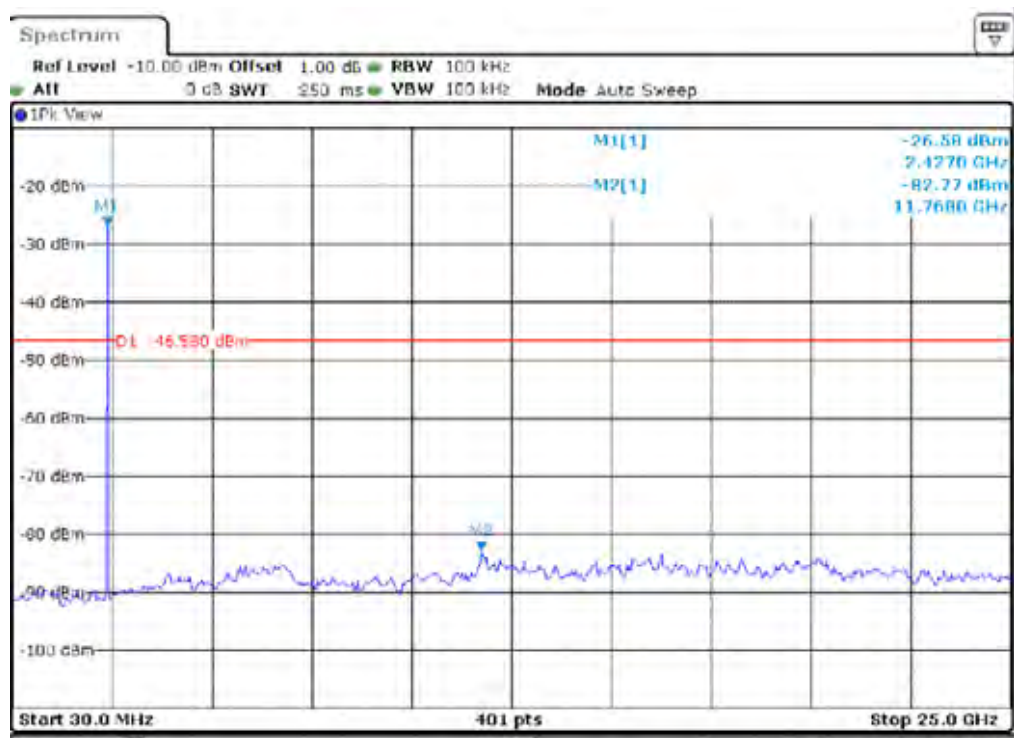


Highest Channel

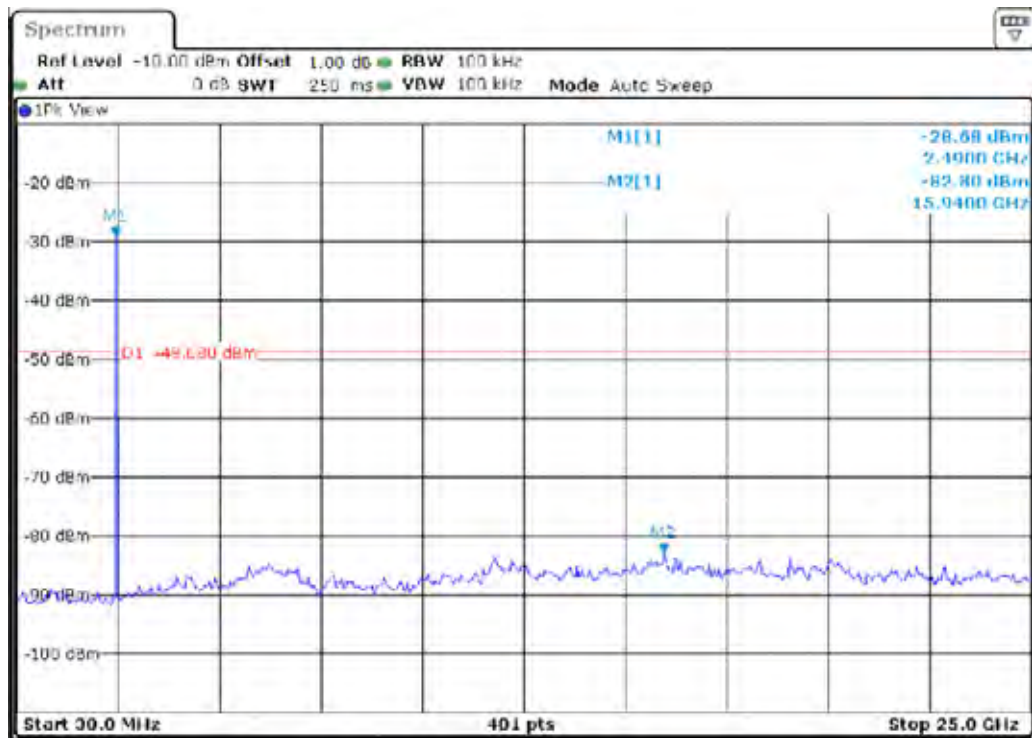

## 11. CHANNEL SEPARATION



## 11.1 TEST SETUP



## 11.2 TEST PROCEDURE

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. The EUT should be transmitting at its maximum data rate as the worst cases.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels; RBW 1% of the span;  
VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold.
4. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

## 11.3 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

## 11.4 RESULT: PASS

## 11.5 TEST DATA:


### BDR 1M

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limit (MHz) |
|---------|-----------------|----------------------------|------------------------------|
| 00      | 2402            | 1.002                      | 0.634666667                  |
| 39      | 2441            | 1.002                      | 0.644666667                  |
| 78      | 2480            | 1.002                      | 0.638                        |

Lowest Channel




Middle Channel

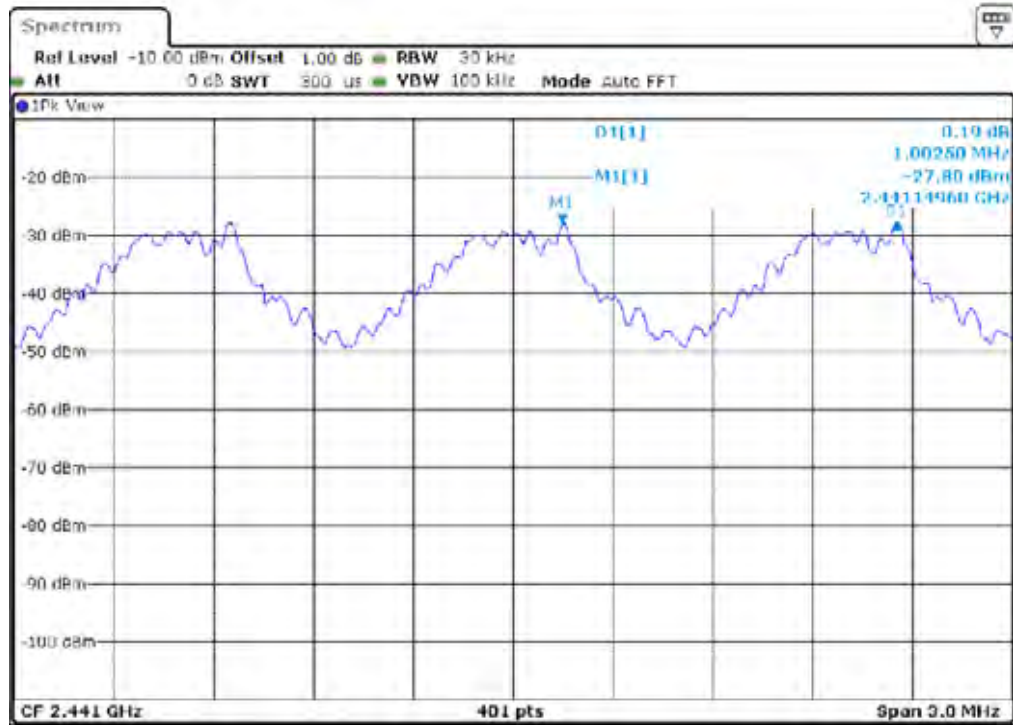




Highest Channel

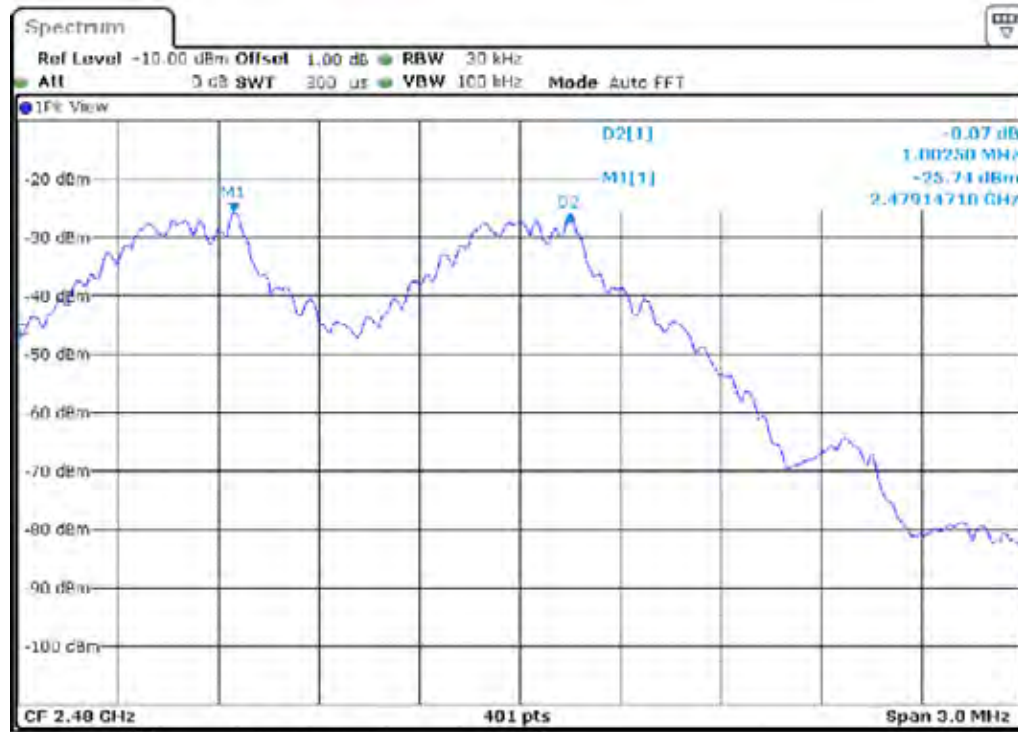


**BDR 3M**

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limit (MHz) |
|---------|-----------------|----------------------------|------------------------------|
| 00      | 2402            | 0.995                      | 0.884                        |
| 39      | 2441            | 1.002                      | 0.880666667                  |
| 78      | 2480            | 1.002                      | 0.884                        |

Lowest Channel

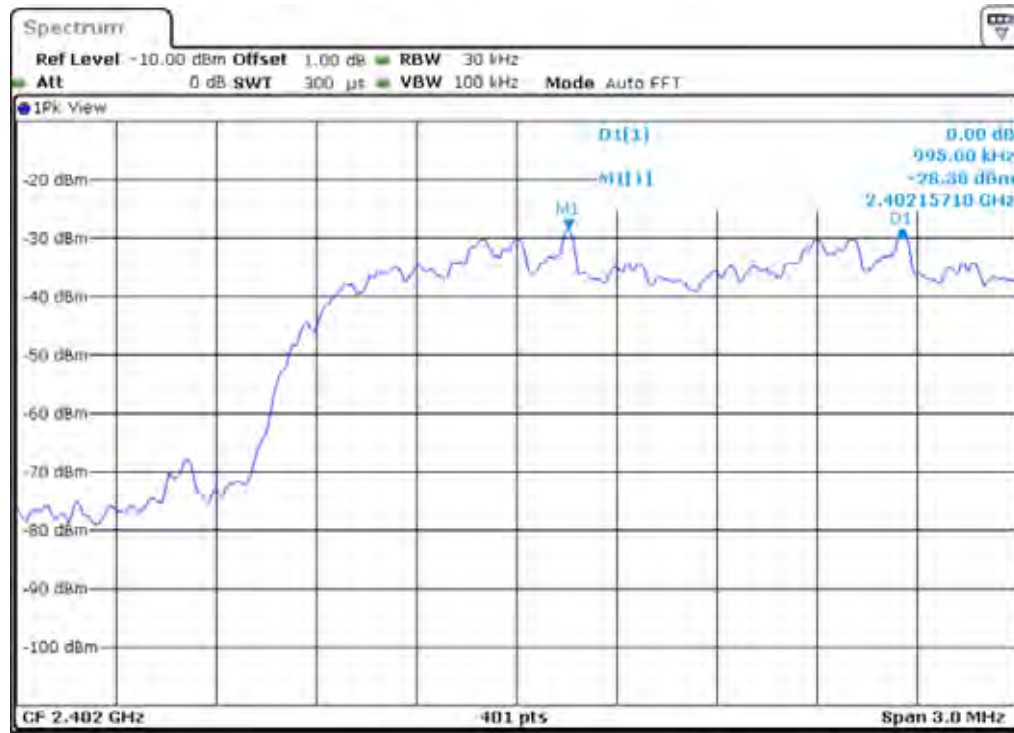


### Middle Channel

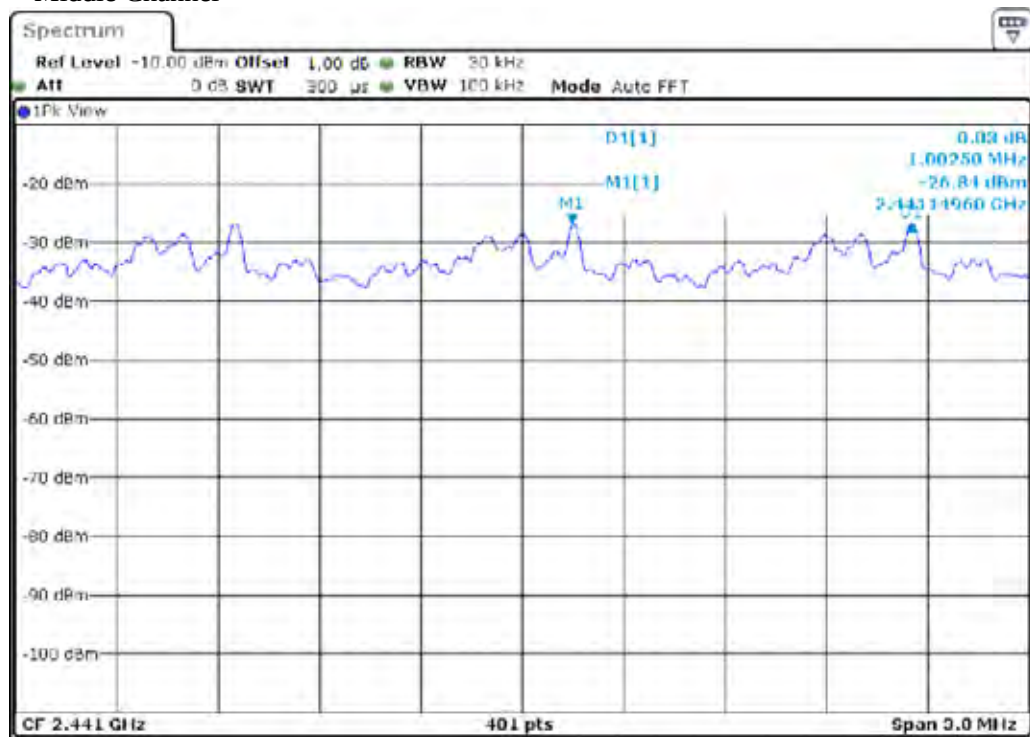



Highest Channel

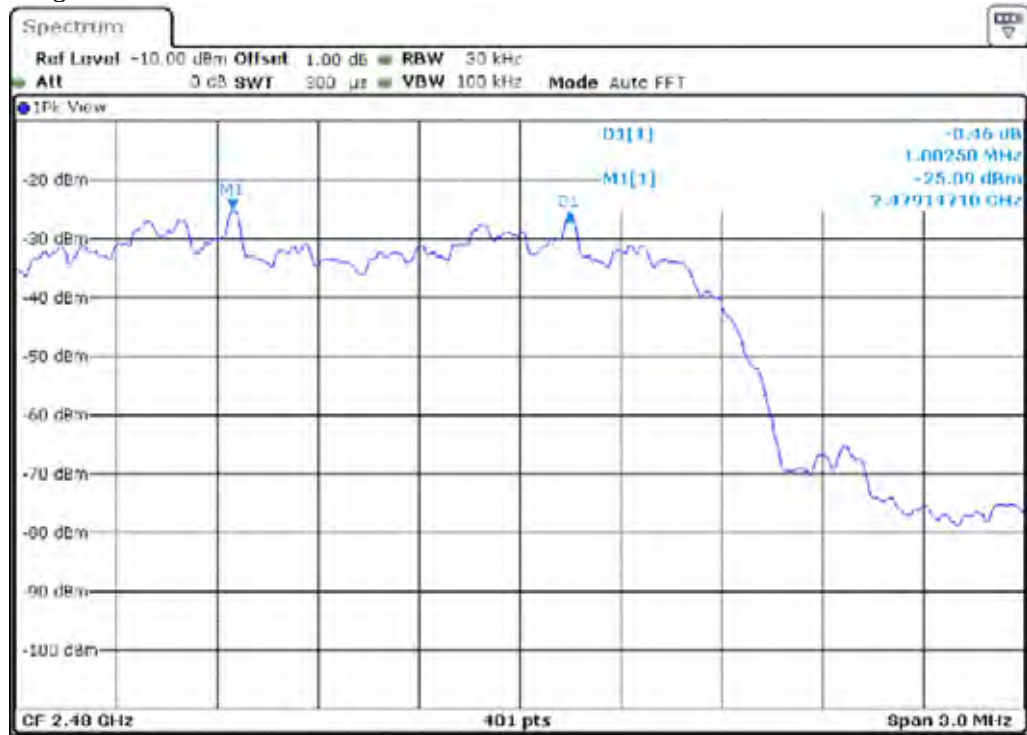






## **12. DWELL TIME OF EACH CHANNEL**

### **12.1 TEST SETUP**

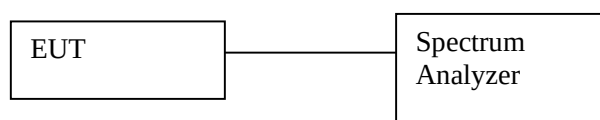

### **12.2 TEST PROCEDURE**

- 1.The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. The EUT should be transmitting at its maximum data rate as the worst cases.
3. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW = RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak;  
Trace = max hold.
4. Use the marker-delta function to calculate the dwell time.

### **12.3 LIMIT**

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### **12.4 RESULT: PASS**

### **12.5 TEST DATA:**





**BDR 1M**

A period time = 0.4 (ms) \* 79 = 31.6 (s)


|        |               |   |            |   |             |   |        |        |      |
|--------|---------------|---|------------|---|-------------|---|--------|--------|------|
| CH Low | DH1 time slot | = | 0.512 (ms) | * | (1600/2/79) | * | 31.6 = | 144.00 | (ms) |
|        | DH3 time slot | = | 2 (ms)     | * | (1600/4/79) | * | 31.6 = | 280.00 | (ms) |
|        | DH5 time slot | = | 2.4 (ms)   | * | (1600/6/79) | * | 31.6 = | 320.00 | (ms) |

|        |               |   |            |   |             |   |        |        |      |
|--------|---------------|---|------------|---|-------------|---|--------|--------|------|
| CH Mid | DH1 time slot | = | 0.475 (ms) | * | (1600/2/79) | * | 31.6 = | 144.00 | (ms) |
|        | DH3 time slot | = | 1.8 (ms)   | * | (1600/4/79) | * | 31.6 = | 304.00 | (ms) |
|        | DH5 time slot | = | 2.45 (ms)  | * | (1600/6/79) | * | 31.6 = | 325.33 | (ms) |

|         |               |   |           |   |             |   |        |        |      |
|---------|---------------|---|-----------|---|-------------|---|--------|--------|------|
| CH High | DH1 time slot | = | 0.5 (ms)  | * | (1600/2/79) | * | 31.6 = | 144.00 | (ms) |
|         | DH3 time slot | = | 1.8 (ms)  | * | (1600/4/79) | * | 31.6 = | 296.00 | (ms) |
|         | DH5 time slot | = | 2.35 (ms) | * | (1600/6/79) | * | 31.6 = | 325.33 | (ms) |


Lowest Channel

DH1

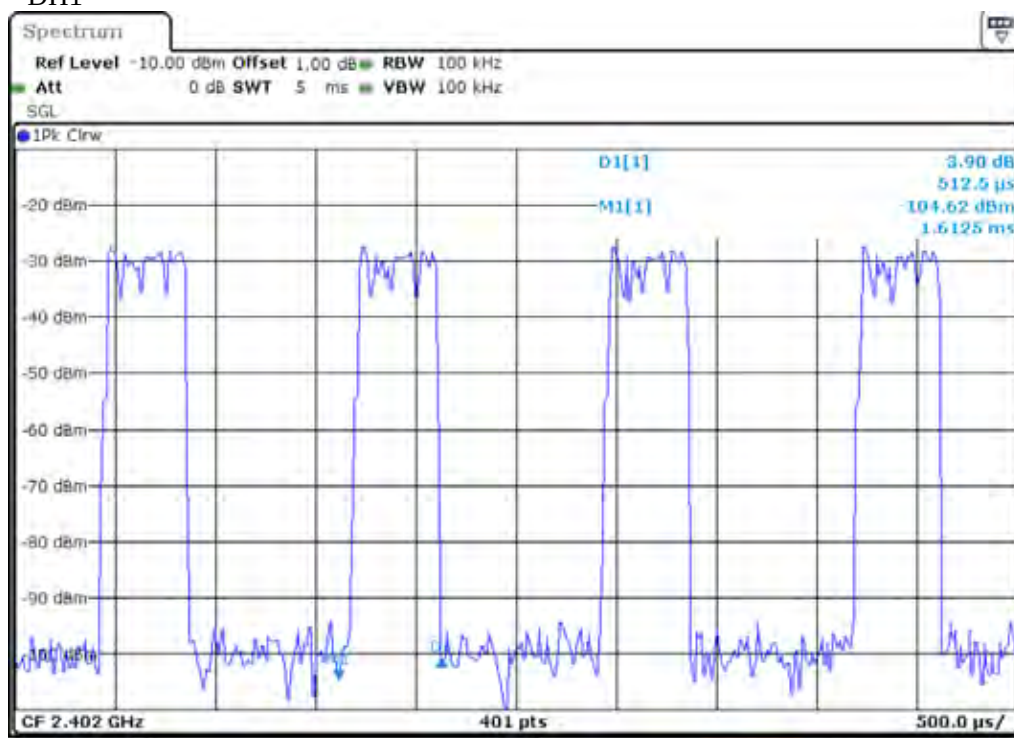




DH3

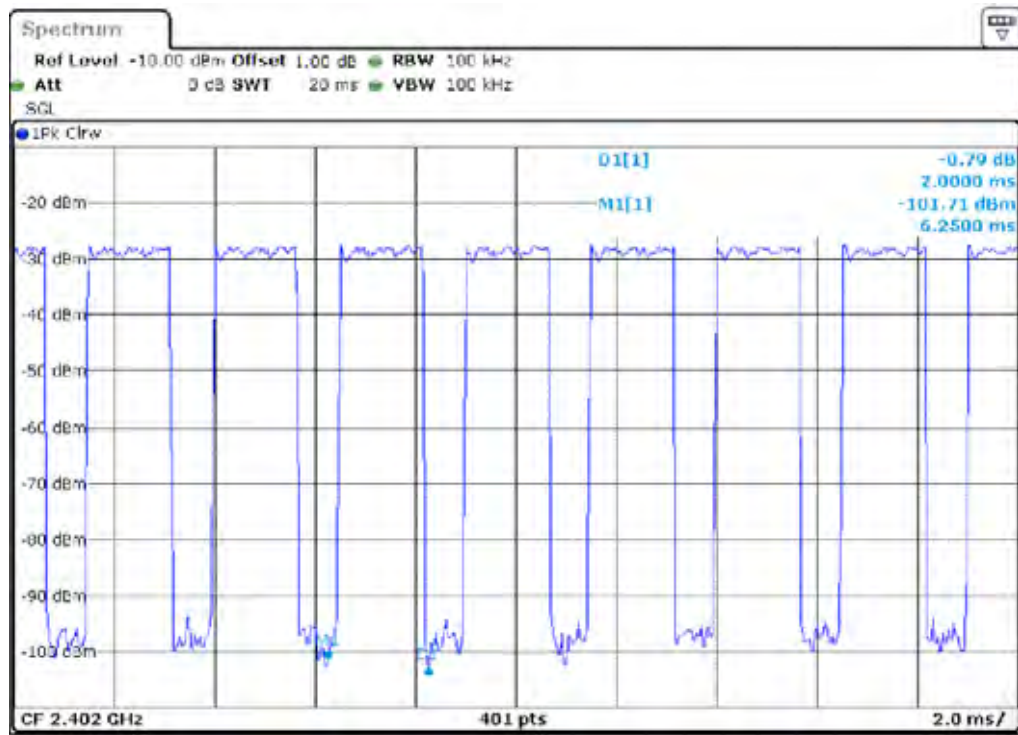


DH5

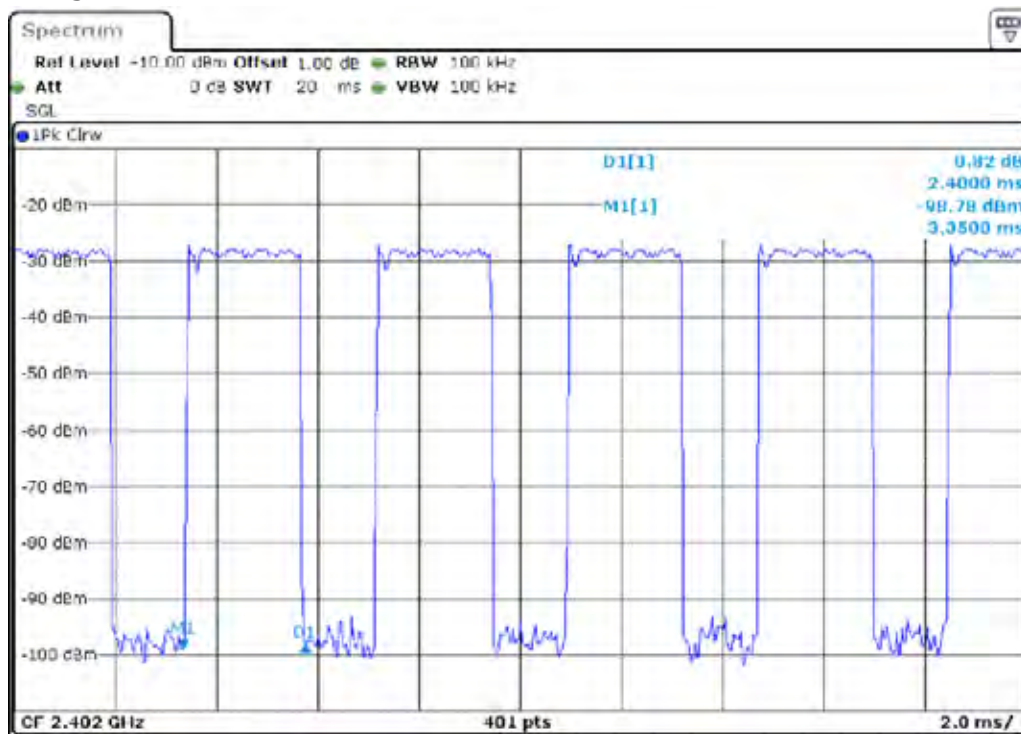




Middle Channel  
DH1

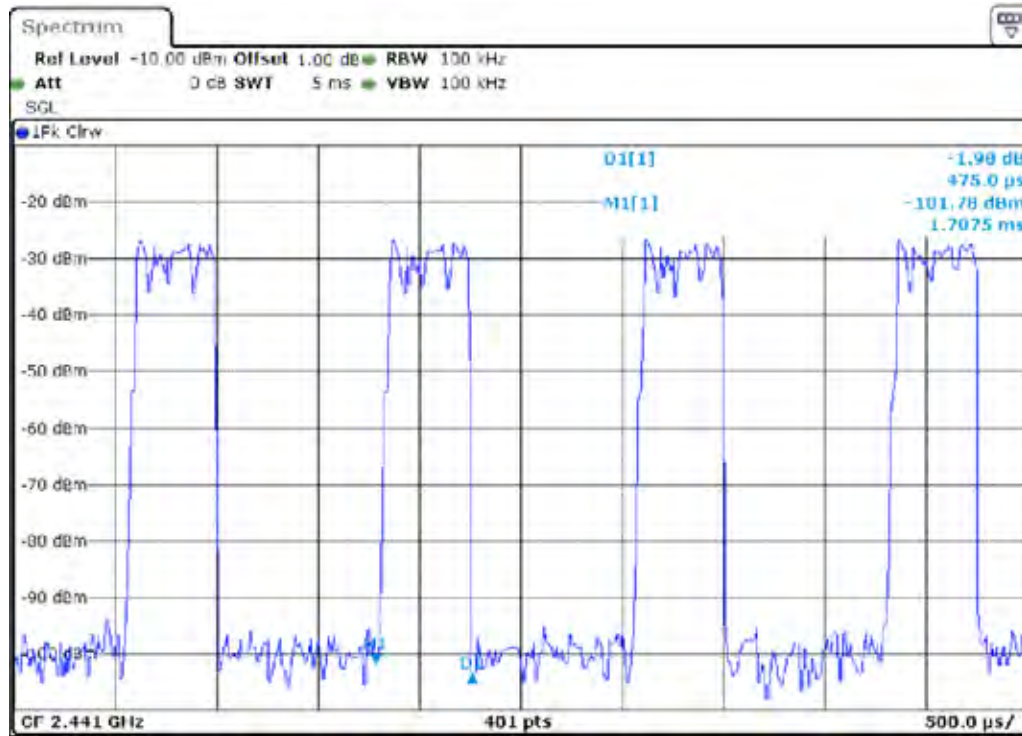


DH3

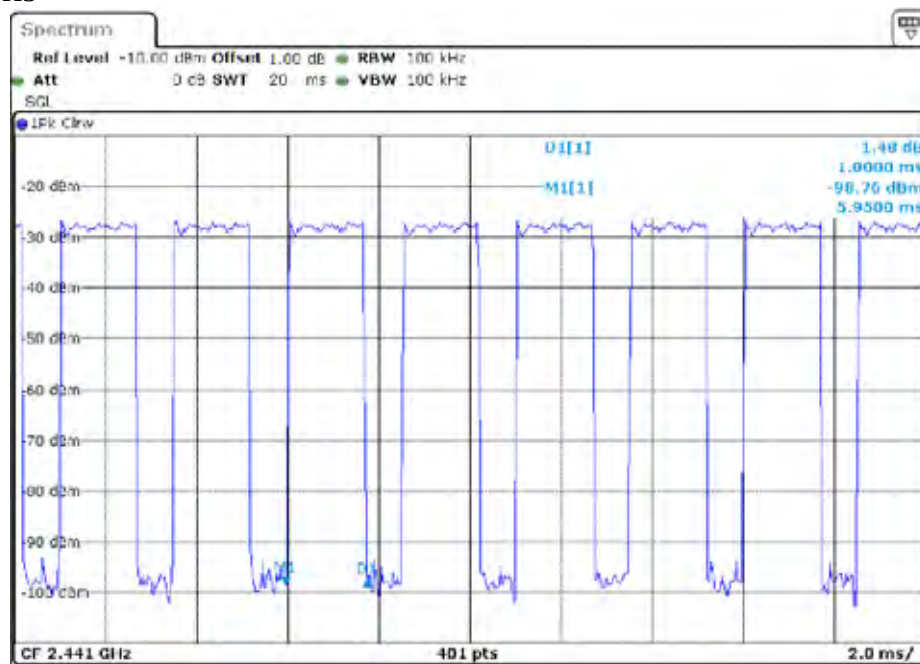




DH5

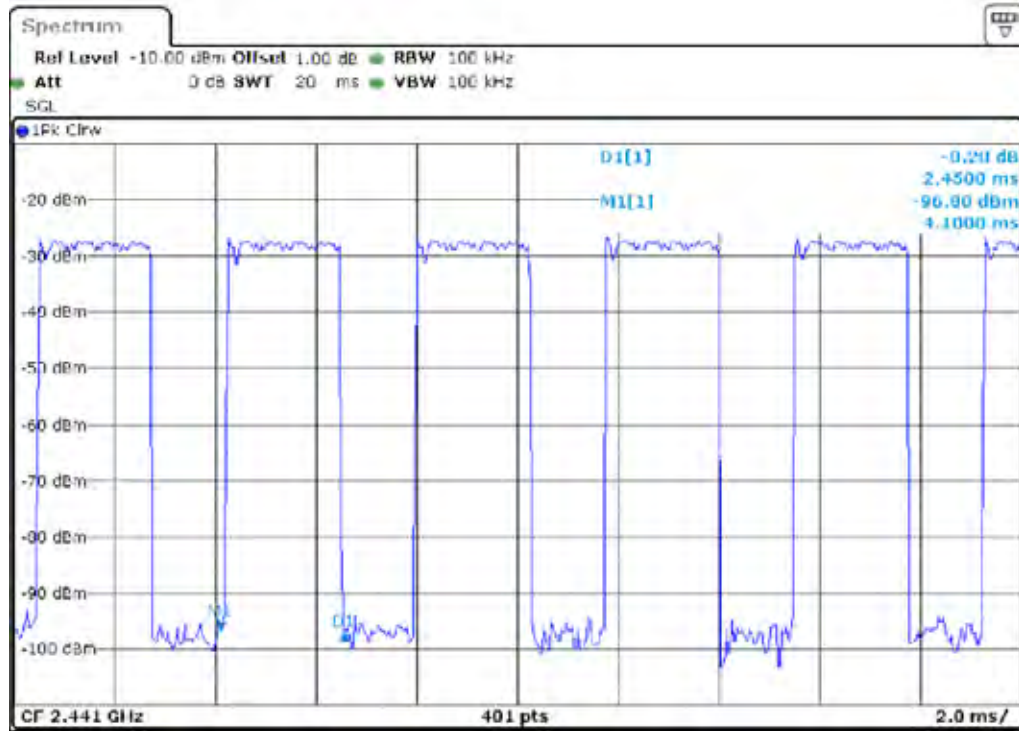


Highest Channel  
DH1




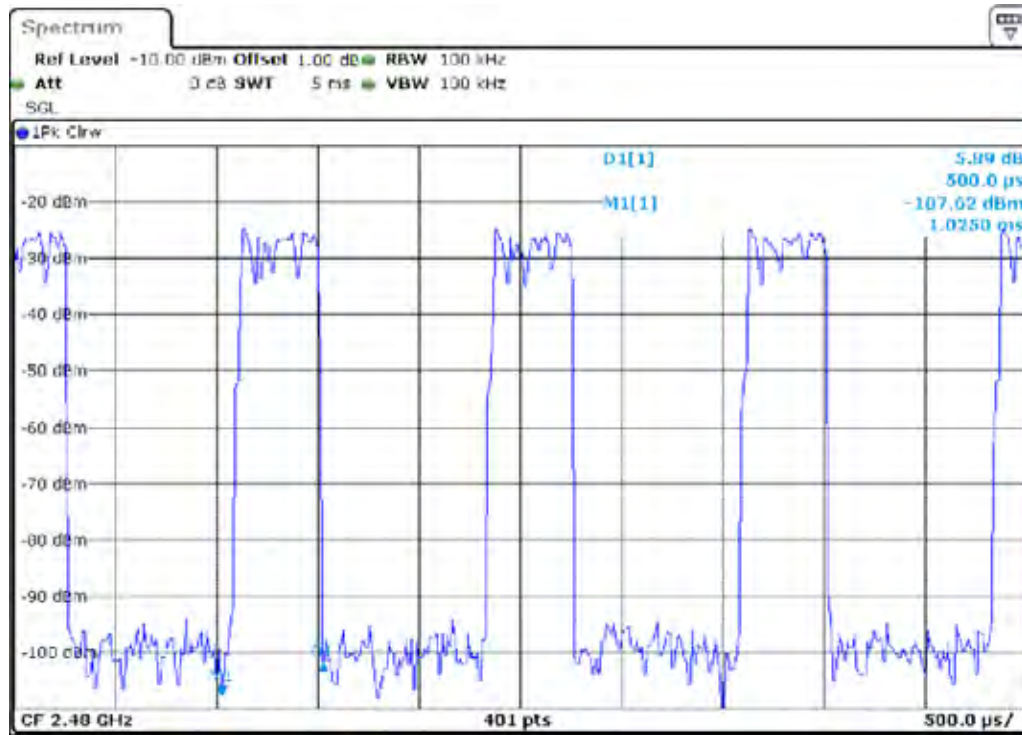

DH3

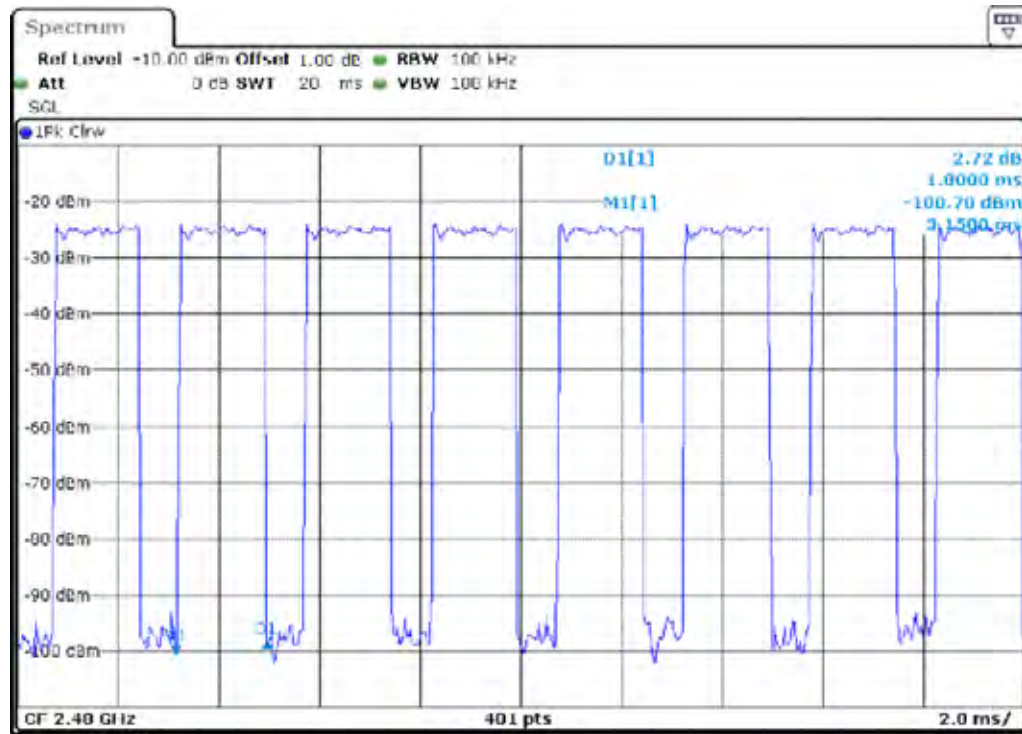

DH5

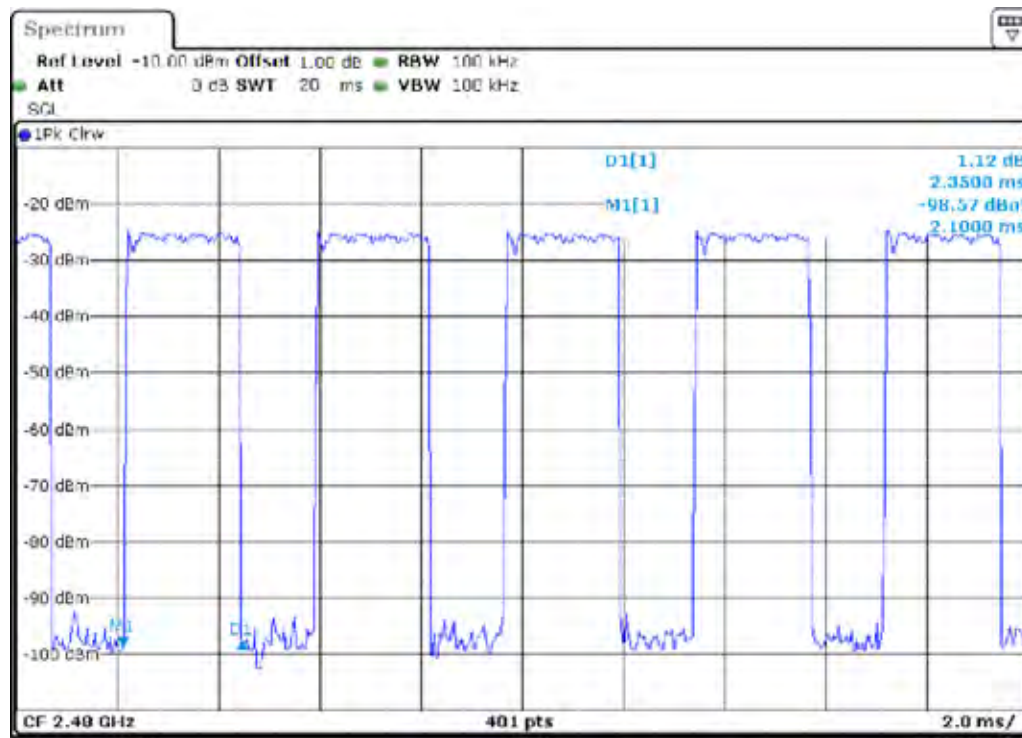

### BDR 3M

A period time = 0.4 (ms) \* 79 = 31.6 (s)


|        |               |   |          |   |             |   |      |   |             |
|--------|---------------|---|----------|---|-------------|---|------|---|-------------|
| CH Low | DH1 time slot | = | 0.5 (ms) | * | (1600/2/79) | * | 31.6 | = | 152.00 (ms) |
|        | DH3 time slot | = | 1 (ms)   | * | (1600/4/79) | * | 31.6 | = | 288.00 (ms) |
|        | DH5 time slot | = | 1.1 (ms) | * | (1600/6/79) | * | 31.6 | = | 330.66 (ms) |

|        |               |   |           |   |             |   |      |   |             |
|--------|---------------|---|-----------|---|-------------|---|------|---|-------------|
| CH Mid | DH1 time slot | = | 0.53 (ms) | * | (1600/2/79) | * | 31.6 | = | 155.84 (ms) |
|        | DH3 time slot | = | 1 (ms)    | * | (1600/4/79) | * | 31.6 | = | 288.00 (ms) |
|        | DH5 time slot | = | 1.2 (ms)  | * | (1600/6/79) | * | 31.6 | = | 325.33 (ms) |


|         |               |   |            |   |             |   |      |   |             |
|---------|---------------|---|------------|---|-------------|---|------|---|-------------|
| CH High | DH1 time slot | = | 0.487 (ms) | * | (1600/2/79) | * | 31.6 | = | 152.00 (ms) |
|         | DH3 time slot | = | 1 (ms)     | * | (1600/4/79) | * | 31.6 | = | 304.00 (ms) |
|         | DH5 time slot | = | 1.2 (ms)   | * | (1600/6/79) | * | 31.6 | = | 330.66 (ms) |




DH1

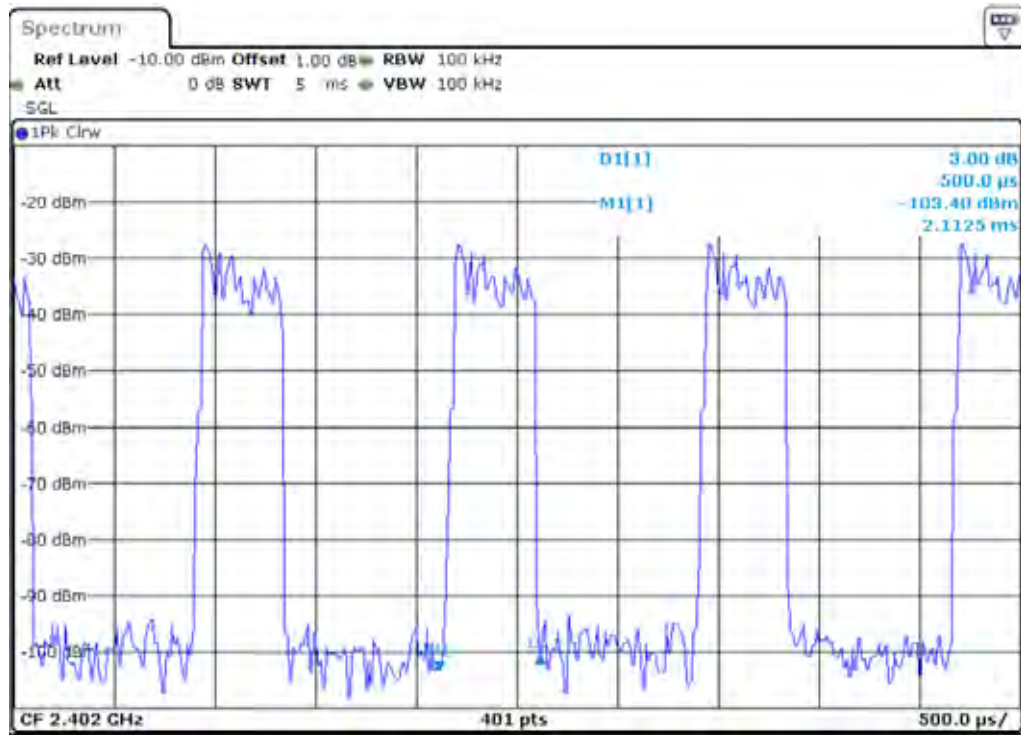

DH3

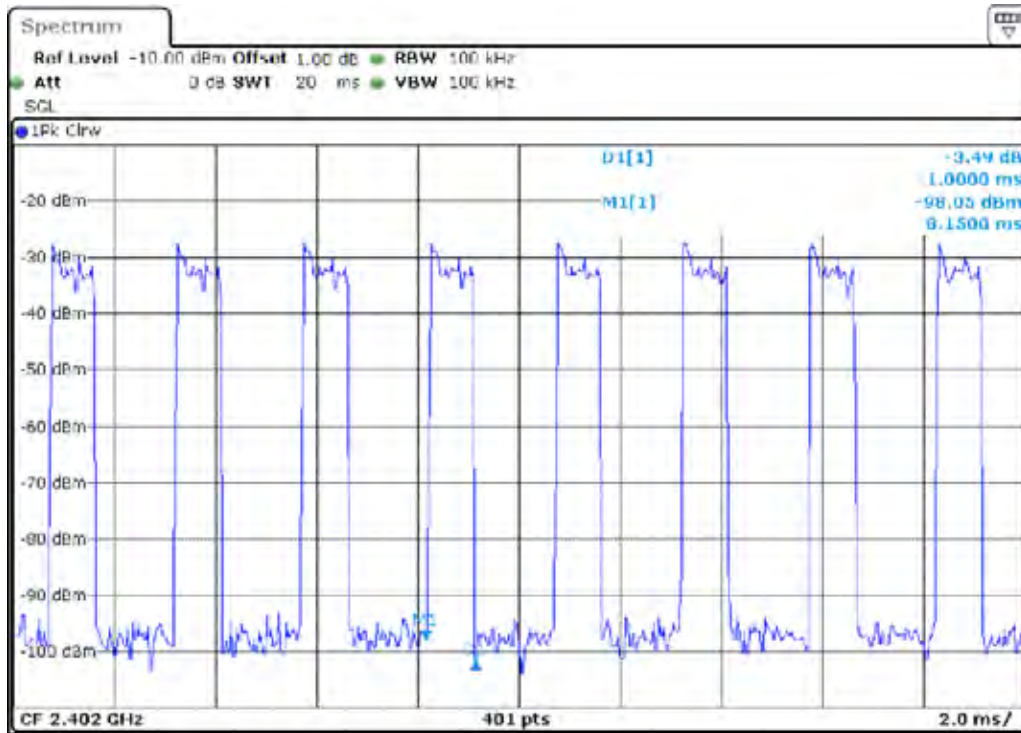


DH5

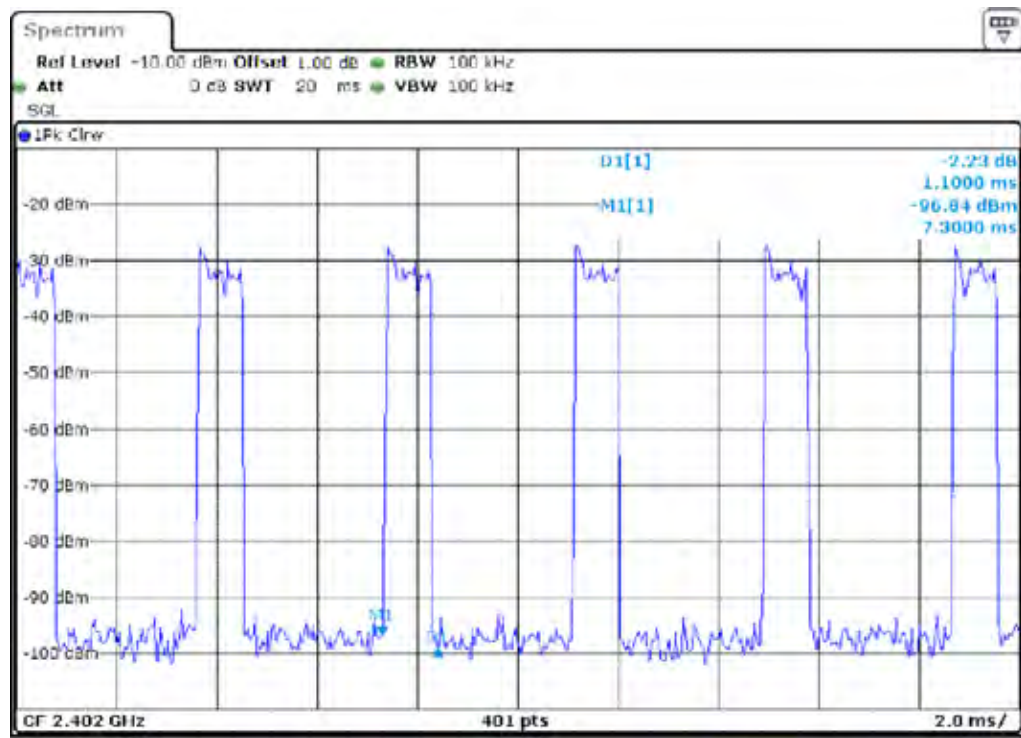


Middle Channel  
DH1




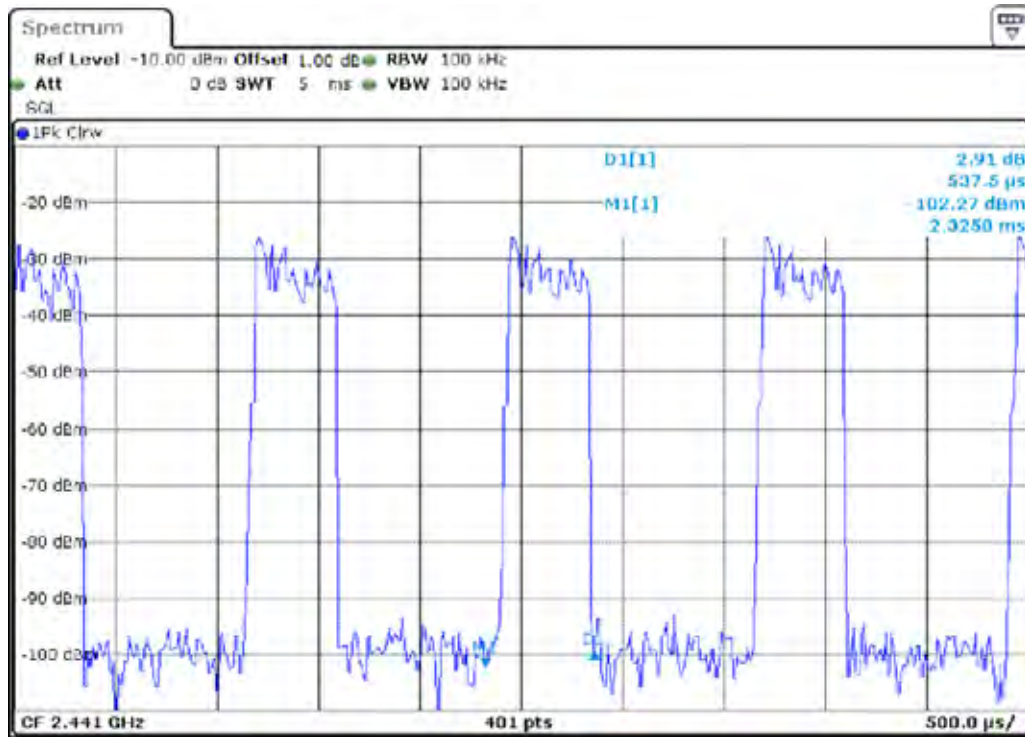


DH3

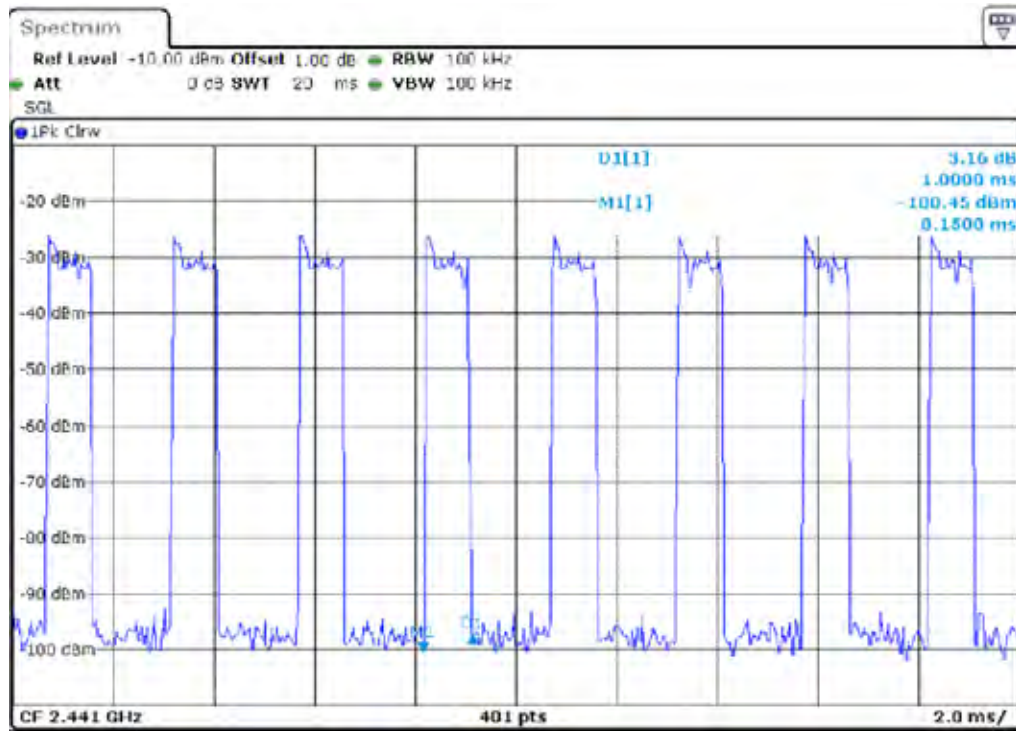

DH5

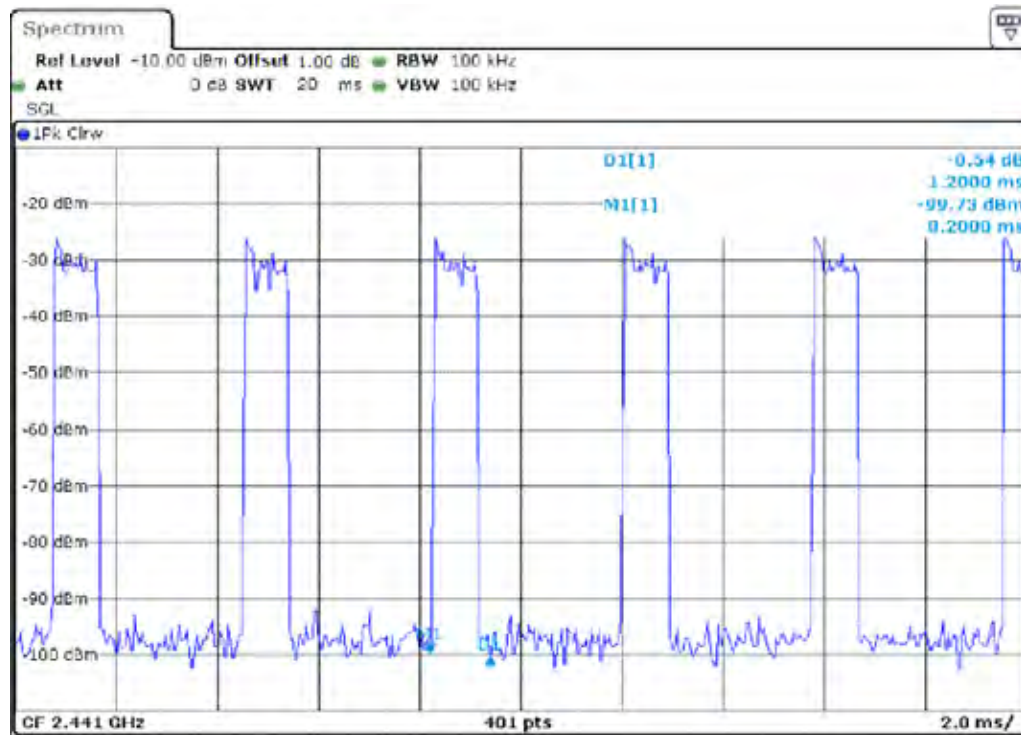


Highest Channel  
DH1

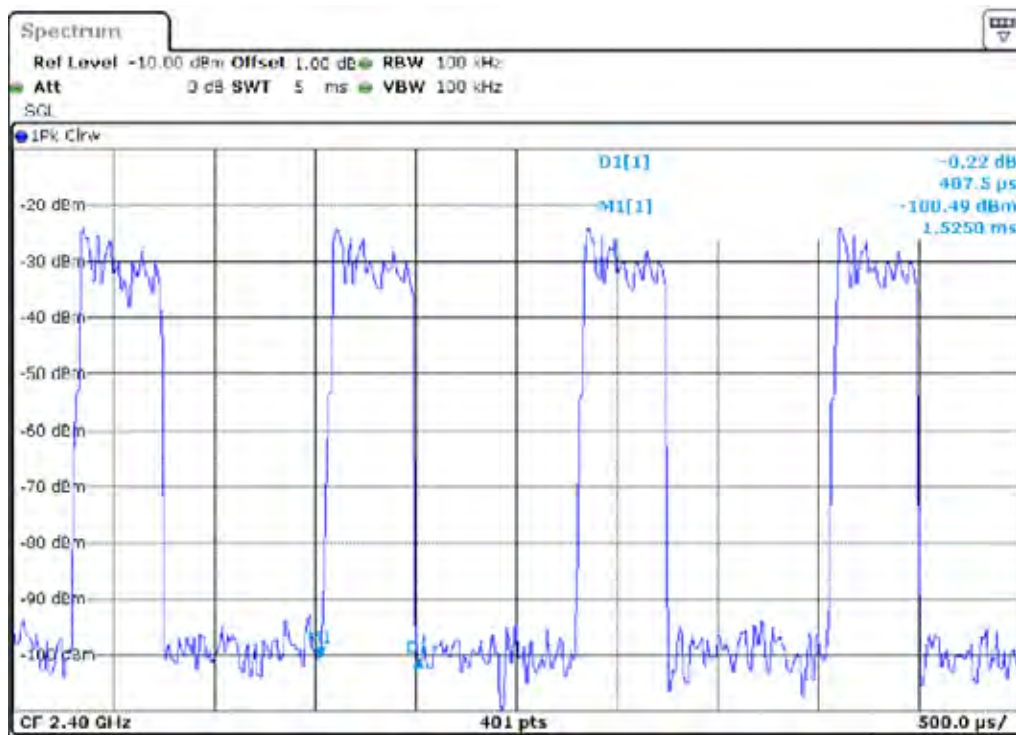




DH3

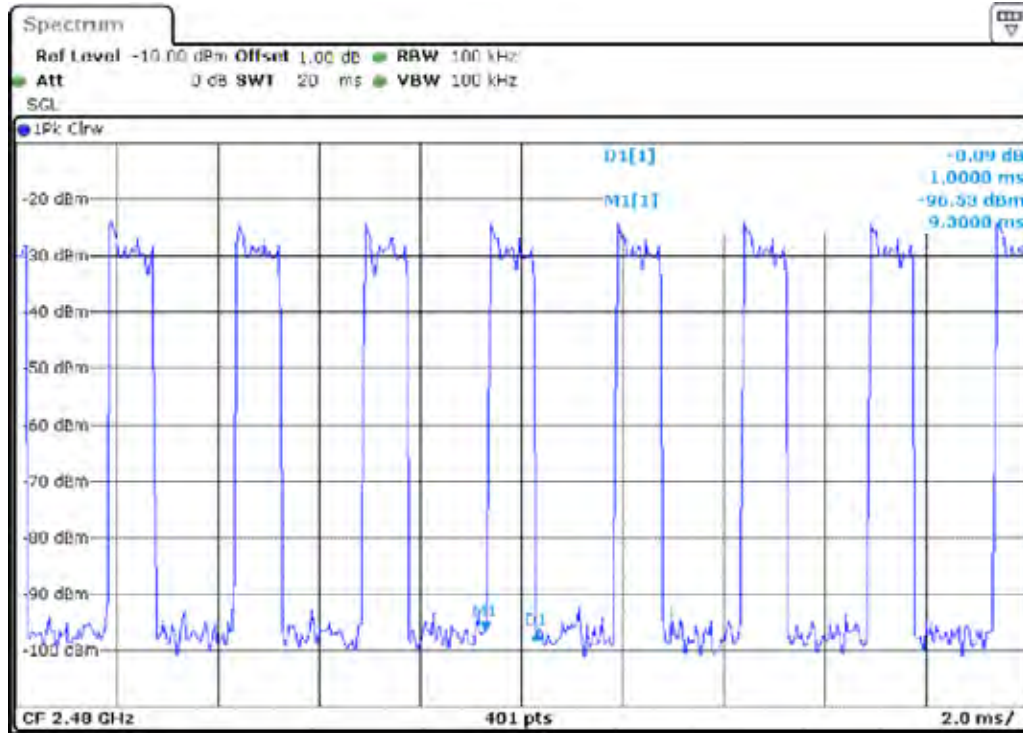


DH5

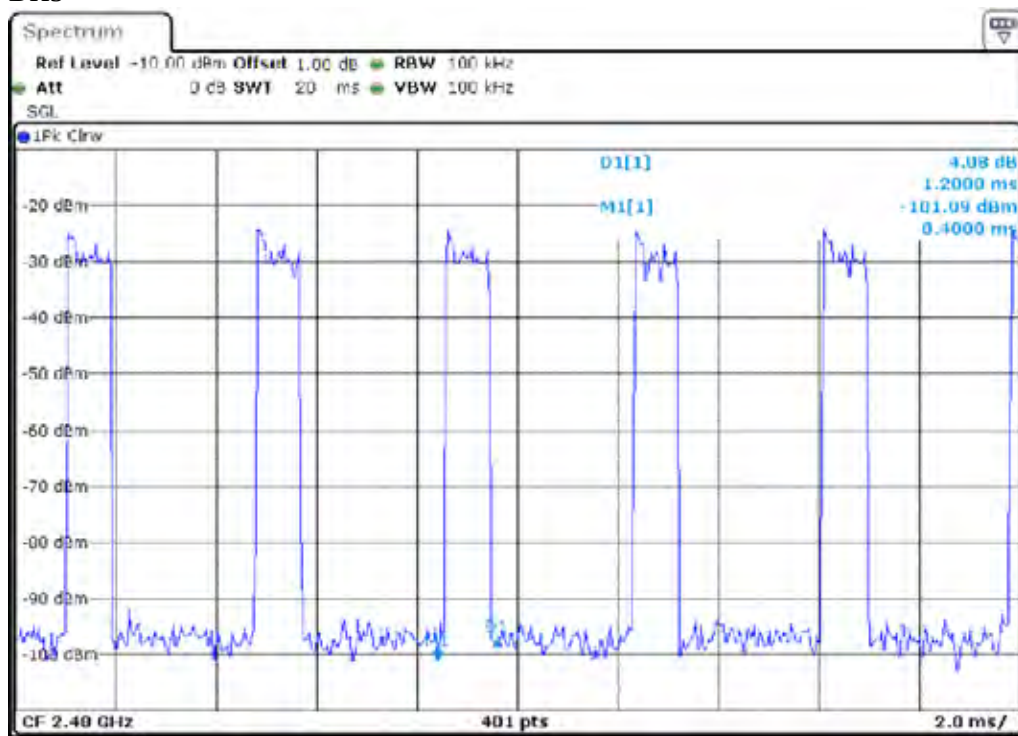



## 13. NUMBER OF CHANNELS

### 13.1 TEST SETUP



### 13.2 TEST PROCEDURE

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. The modulation types of EUT are irrelevant to number of hopping channels deviation.
3. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = the frequency band of operation; RBW 1% of the span; VBW RBW; Sweep = auto;  
Detector function = peak; Trace = max hold.
4. The number of hopping frequency used is defined as the device has the numbers of total channel.


### 13.3 LIMIT

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

### 13.4 RESULT: PASS

### 13.5 TEST DATA:

#### BDR 1M

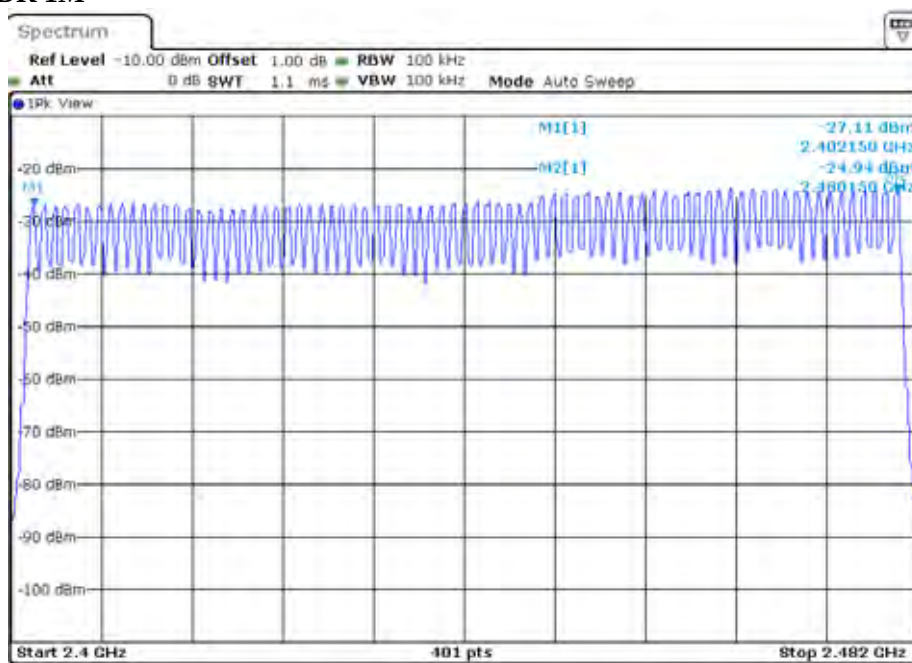



**BDR 3M**

