



Athena S.r.l. (socio unico)
Via Nenni 7
37024 Negar di Valpolicella (VR)
Italy

Tel: +39 045 7514261
Fax: +39 045 4743082
www.rationalseed.com

Document Code:	TRL01016100601
Title:	Radiation Lobes of ASSA Abloy KSTX3 Remote Control
Date:	31/01/2025
Authors:	Massimo Legnani
Revision:	-
Approval:	Massimo Legnani
Total pages:	copertina+27
State:	Final
Distribution:	Internal; Ditec S.p.A.

Versions			
Code	Date	Authors	Notes
TRL01016100601	31/01/2025	ML	

1	Acronyms, Glossary, Conventions.....	1
2	Bibliography and Reference Documents	2
3	Document Subject	3
4	Measure Set Up.....	3
5	RF Conducted Measures.....	4
6	Preliminary Measures	7
7	Relevant Radiation Lobes for FCC	23

1 Acronyms, Glossary, Conventions

Table 1-1 introduces the acronyms used inside the document:

Acronym	Meaning

Table 1-1

Table 1-2 introduces the Glossary of terms used inside the document:

Term	Meaning

Table 1-2

Table 1-3 introduces the conventions list adopted by the document:

Convention	Meaning

Table 1-3

2 Bibliography and Reference Documents

Table 2-1 shows the list of books, articles and documents cited within the document and the correlation with the code used for their citation:

Citation Data	Code

Table 2-1

3 Document Subject

The document reports the radiation lobes of ASSA ABLOY remote control named KSTX3.

4 Measure Set Up

The measure is realized using EMScan RFXpert.

The original nominal RF conducted power is 4dBm.

To better measure the radiation lobes according to RFXpert characteristics, a sample provided with a firmware characterized by RF 13dBm conducted output power has been adopted.

5 RF Conducted Measures

A sample with the set up for FCC radiated measures (not the specific one used during the FCC approval process but one sample from the same batch) has been used to realize the RF power output conducted measures.

The set up is shown in Figure 5-1:


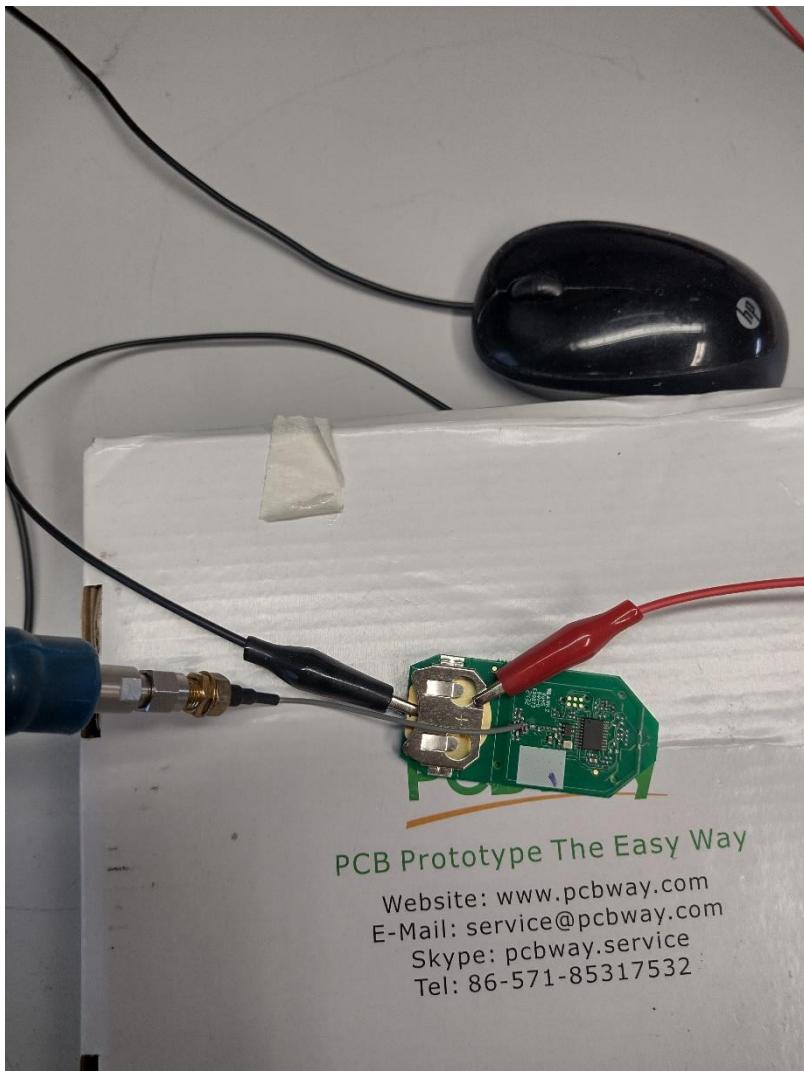


Figure 5-1

The results are shown in Figure 5-2:

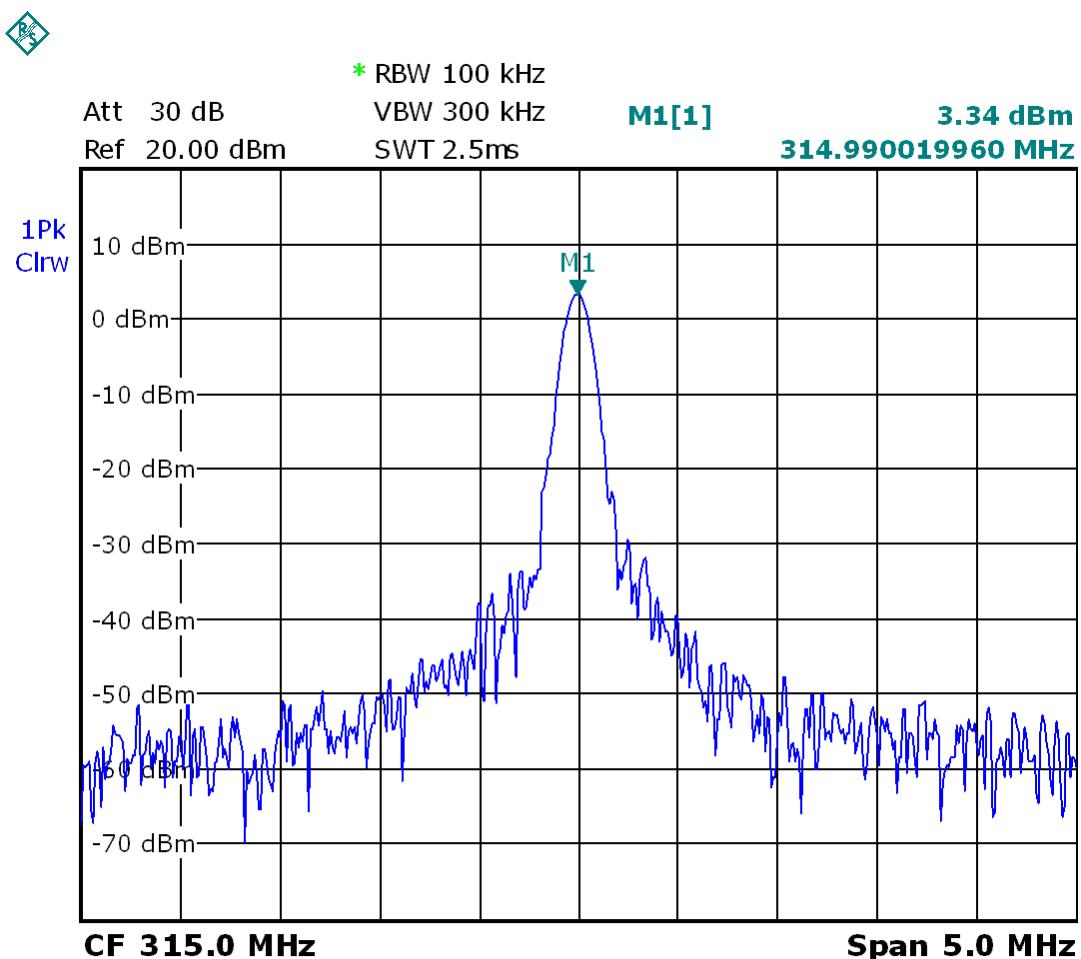


Date: 14.NOV.2024 17:48:36

Figure 5-2

To execute the measure the last part of matching circuit has been removed isolating the antenna from the rest of the circuit and a micro-coaxial cable (nearly 6cm long) has been soldered in that position.

The same measure has been realized on the sample with nominal 13dBm RF conducted output power.

The results are reported below:

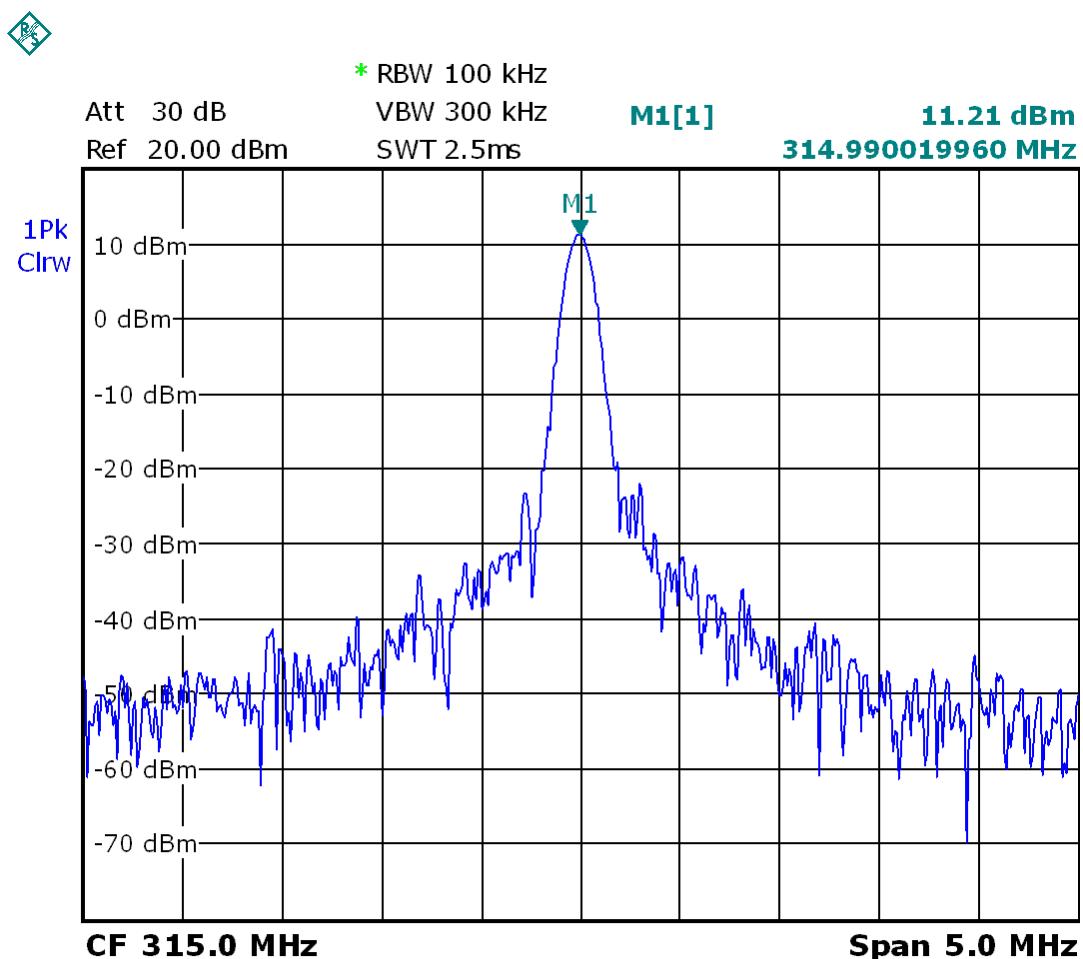

Date: 14.NOV.2024 17:37:31

Figure 5-3

In terms of RF conducted output power the difference between the two sample is 7,87dBm.

6 Preliminary Measures

The preliminary measures are focused on identifying the DUT configuration that produce the radiation peak.

All the preliminary measures are realized without any compensation or calibration related to the chamber adopter for FCC compliance checks.

The first configuration is shown in Figure 6-1:

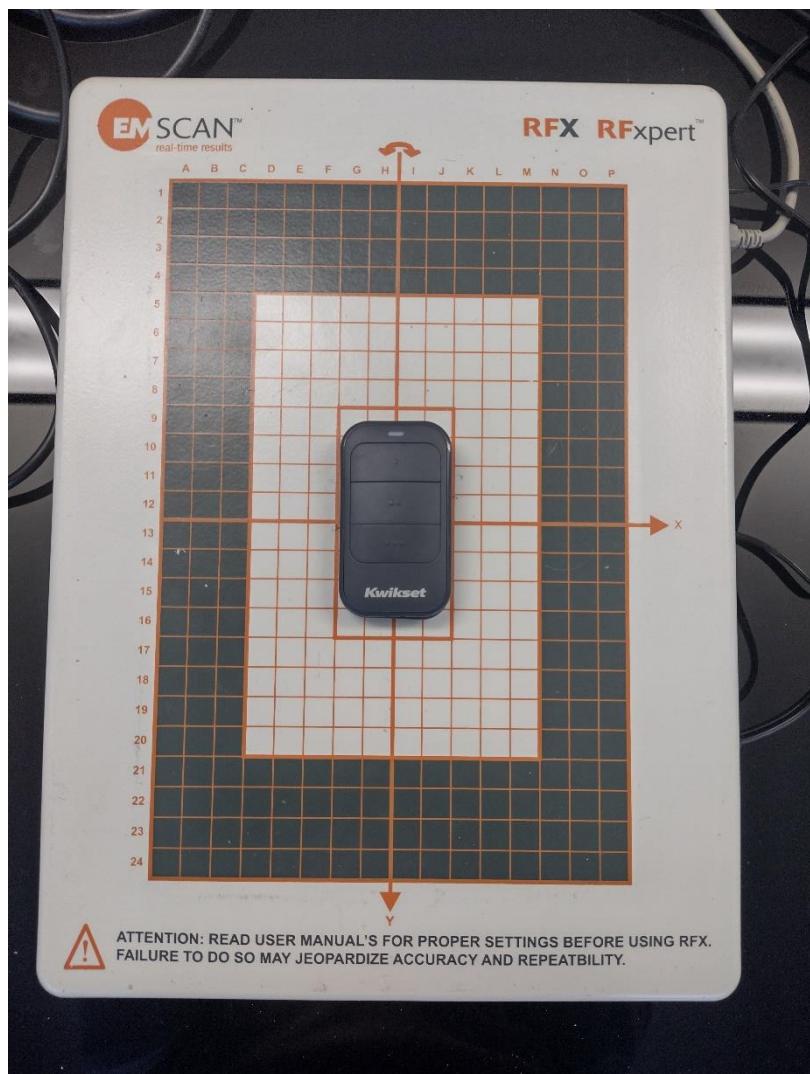


Figure 6-1

In this configuration the radiation lobes are reported below:

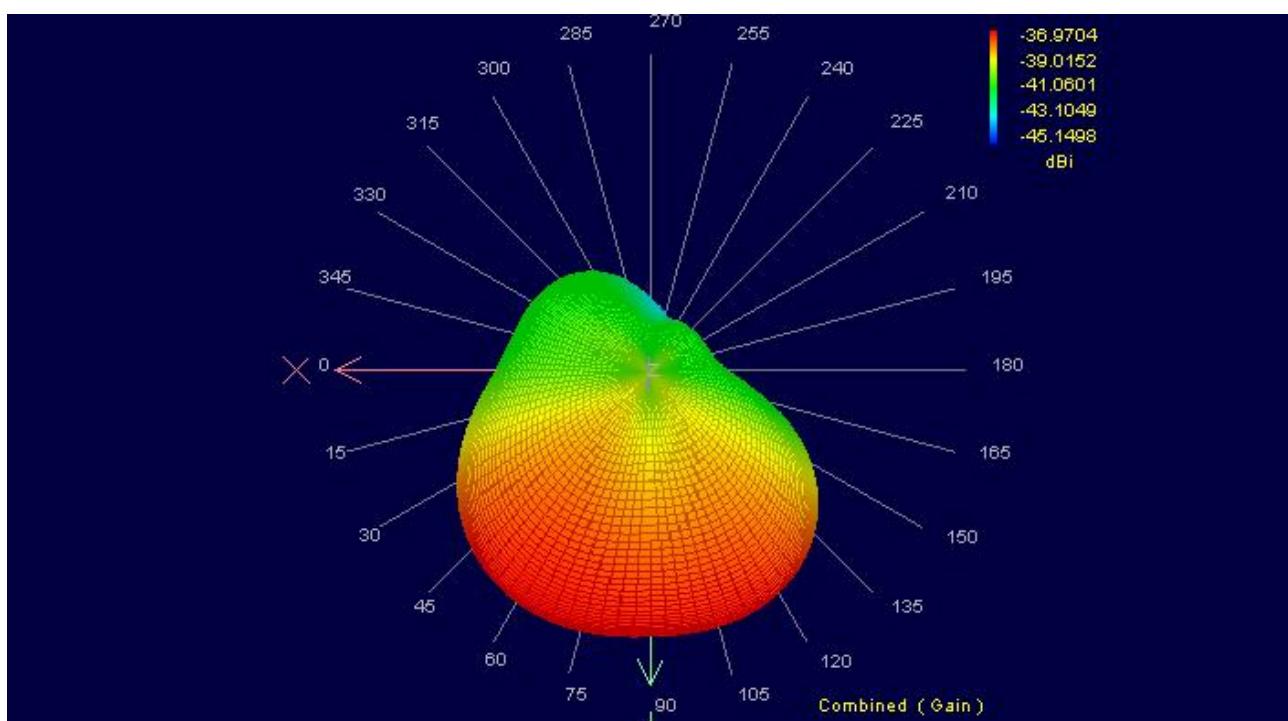


Figure 6-2



Figure 6-3

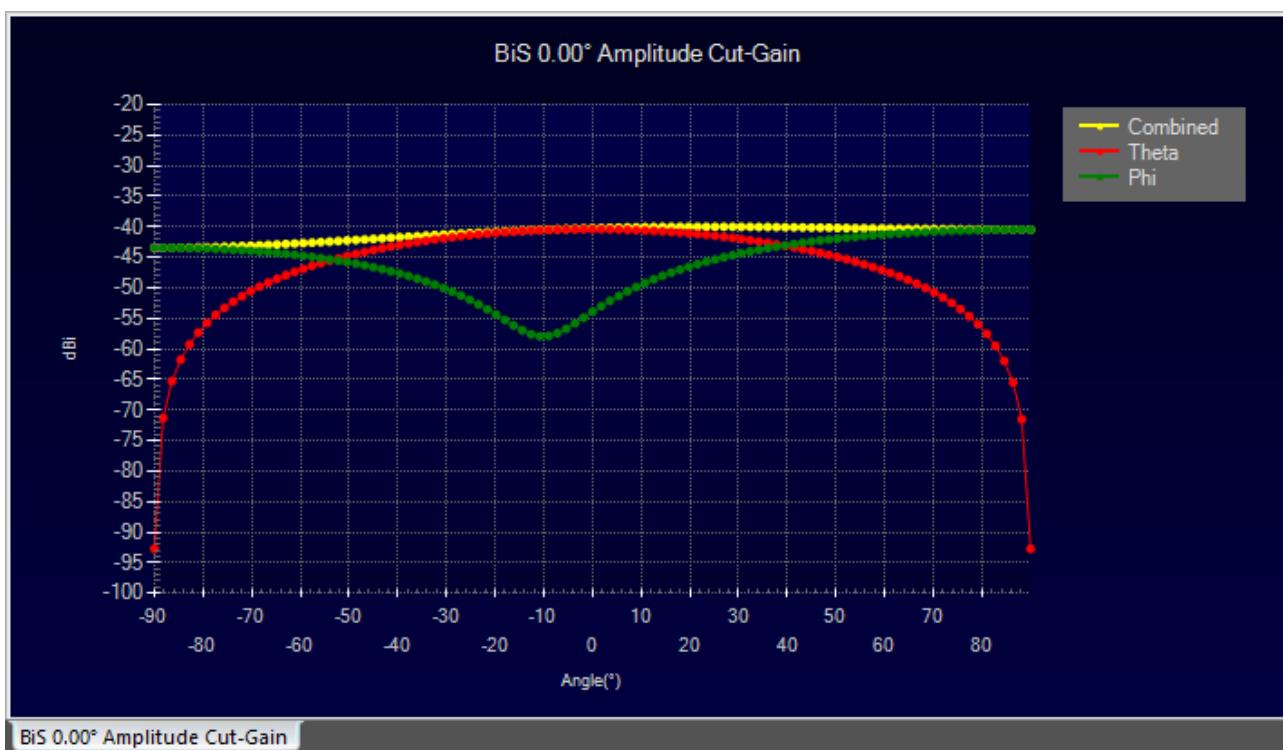


Figure 6-4

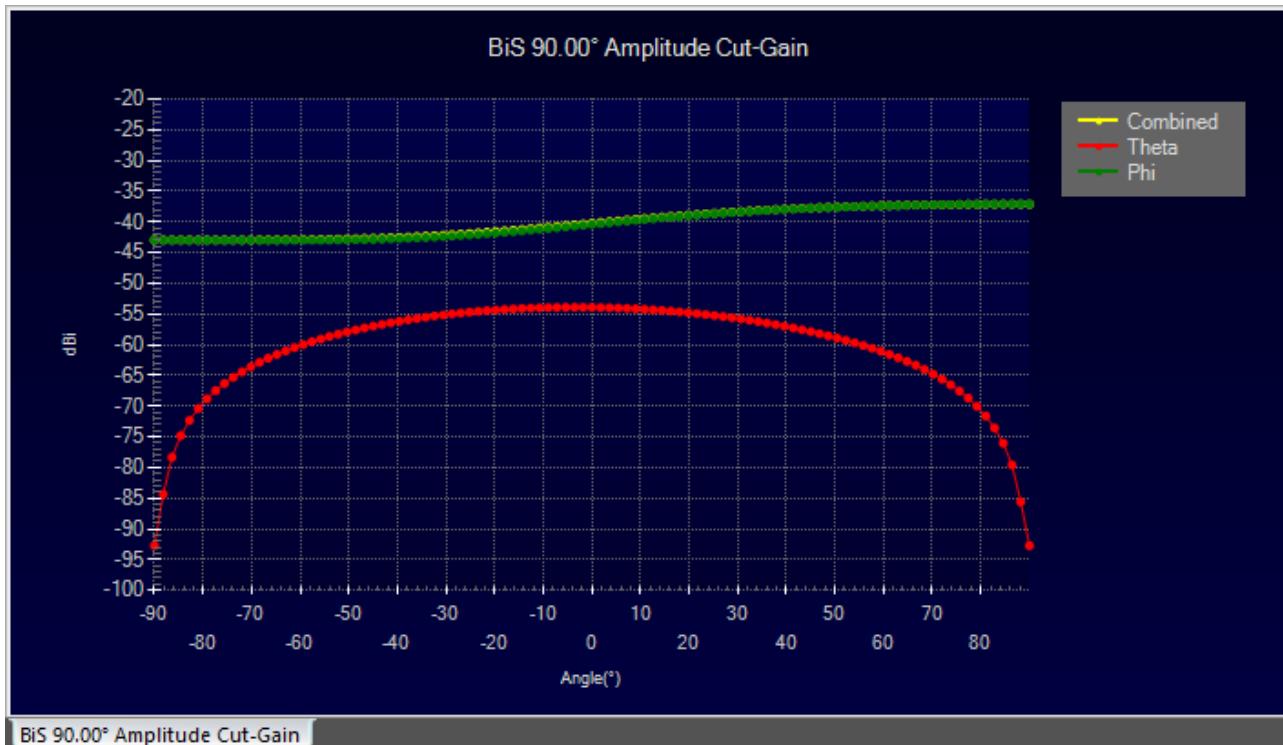


Figure 6-5

Peak EIRP: -26.09dBm.

The second configuration is shown in Figure 6-6:

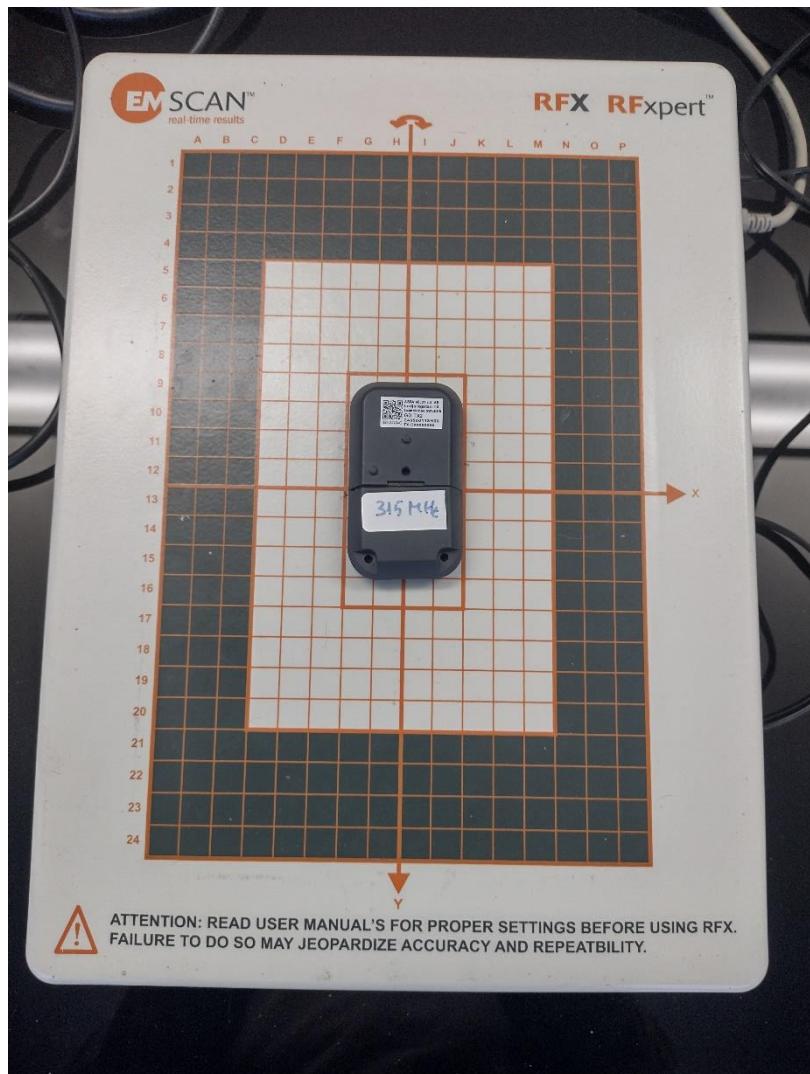


Figure 6-6

In this configuration the radiation lobes are reported below:

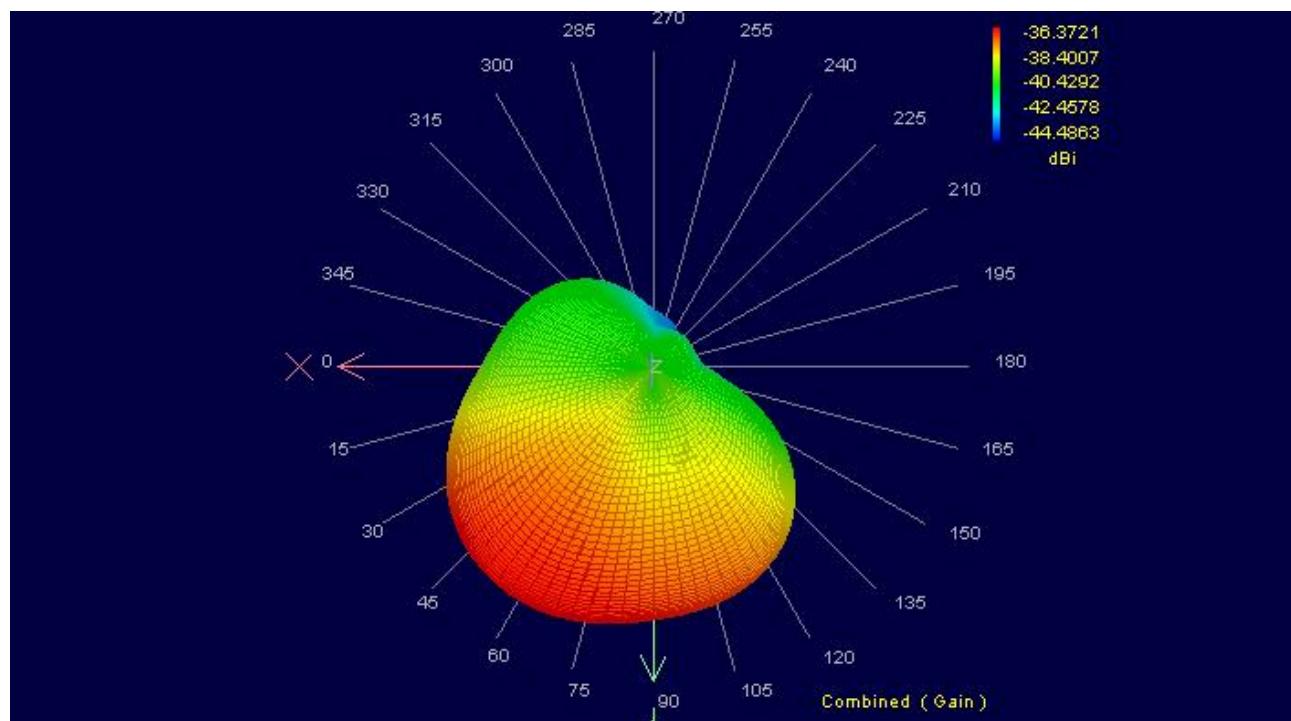


Figure 6-7

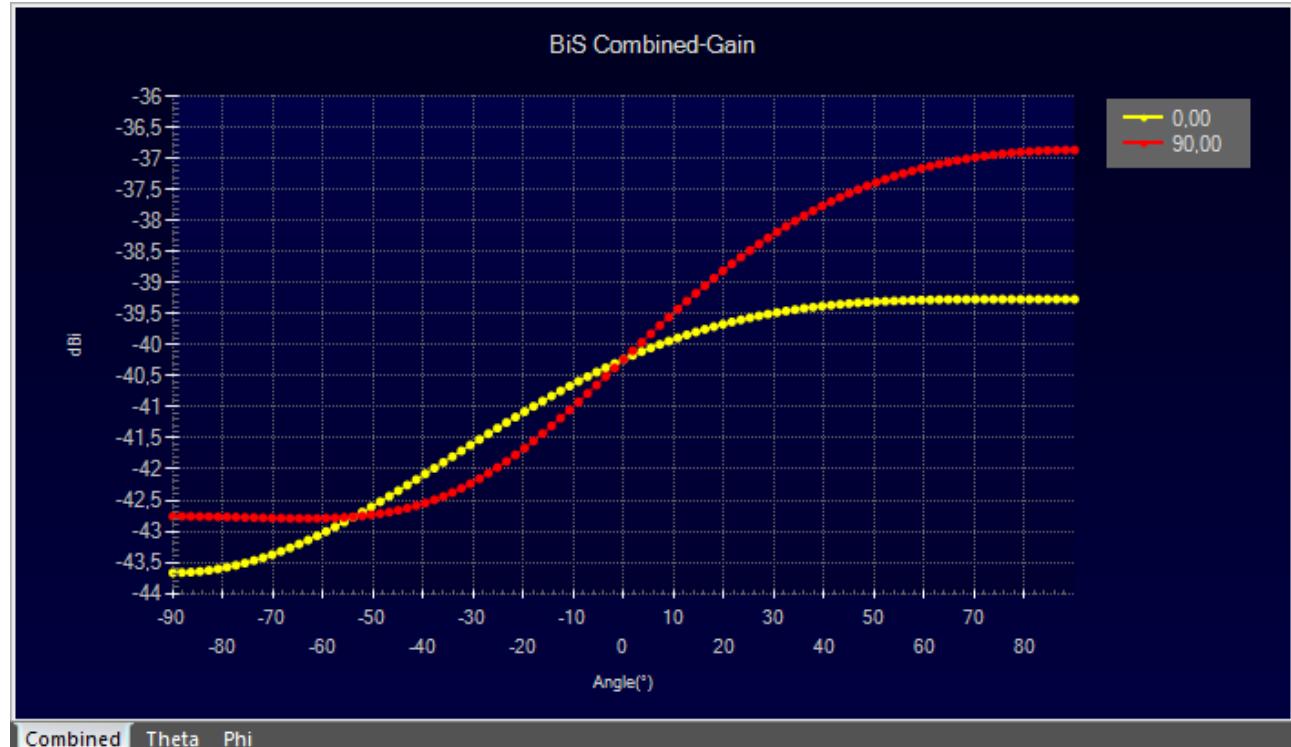


Figure 6-8

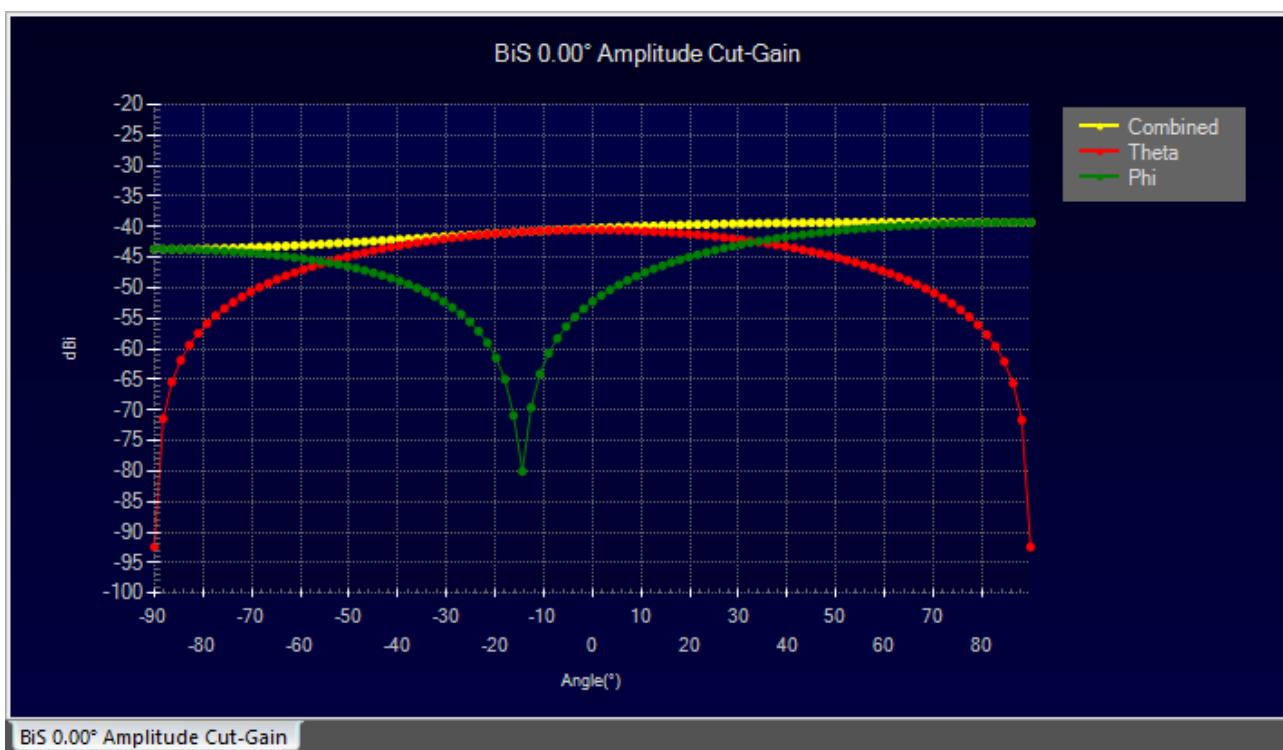


Figure 6-9

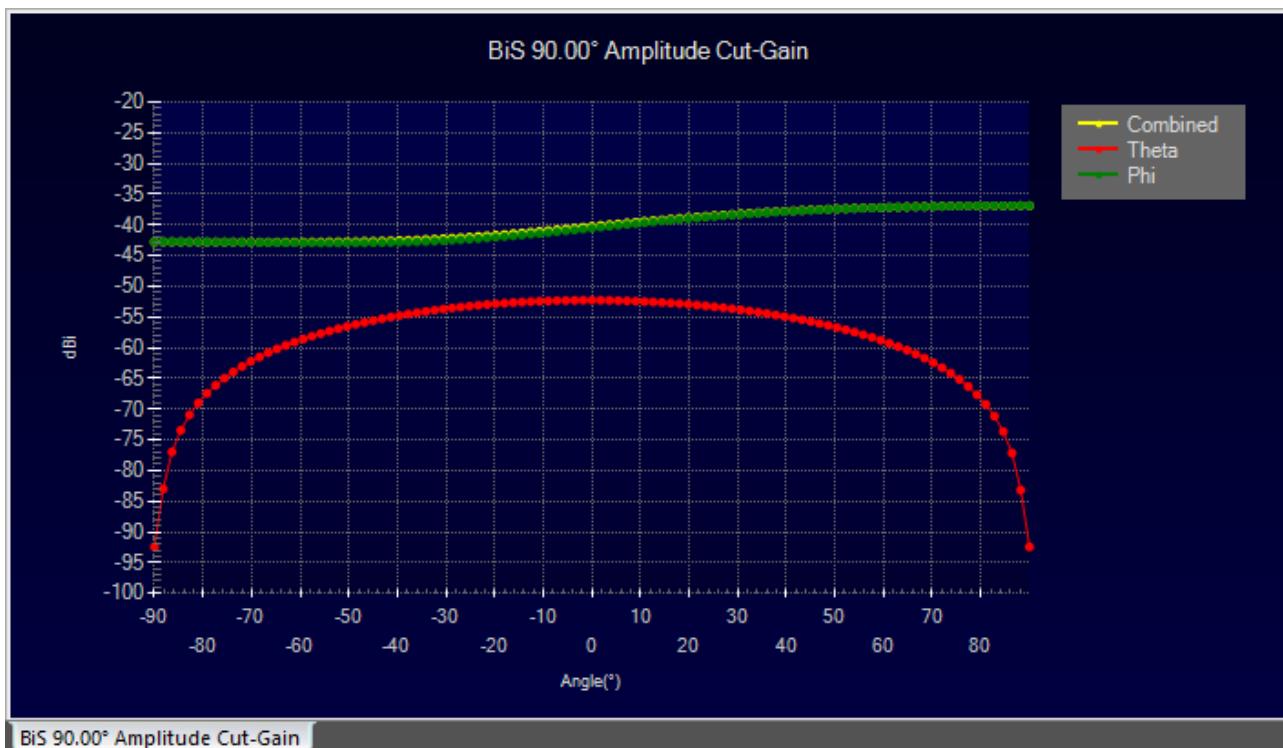


Figure 6-10

Peak EIRP: -25.49dBm.

The third configuration is shown in Figure 6-11:

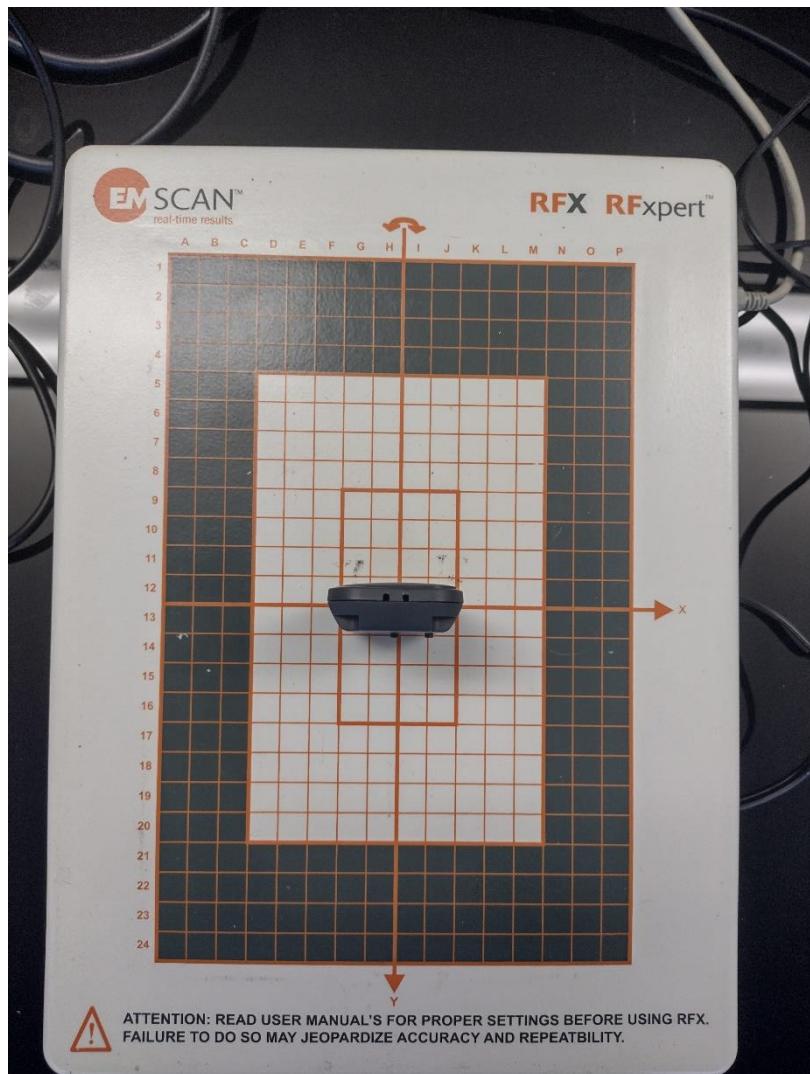


Figure 6-11

In this configuration the radiation lobes are reported below:

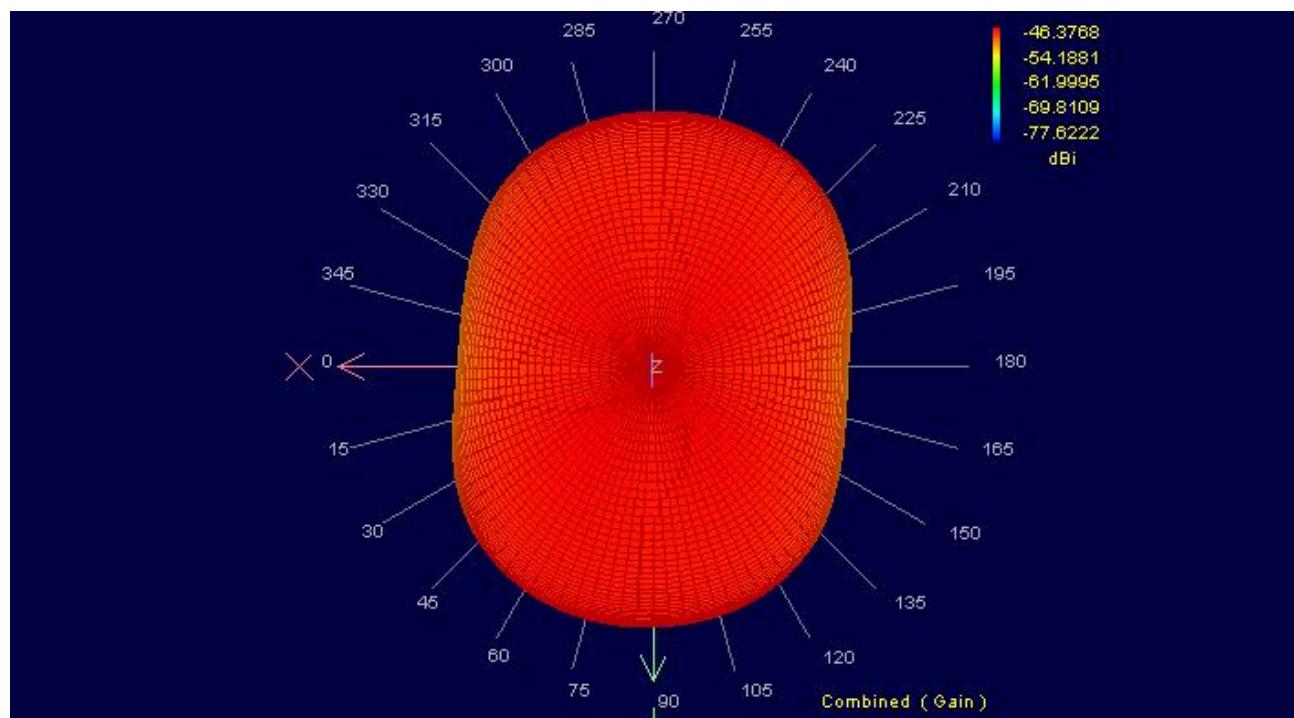


Figure 6-12

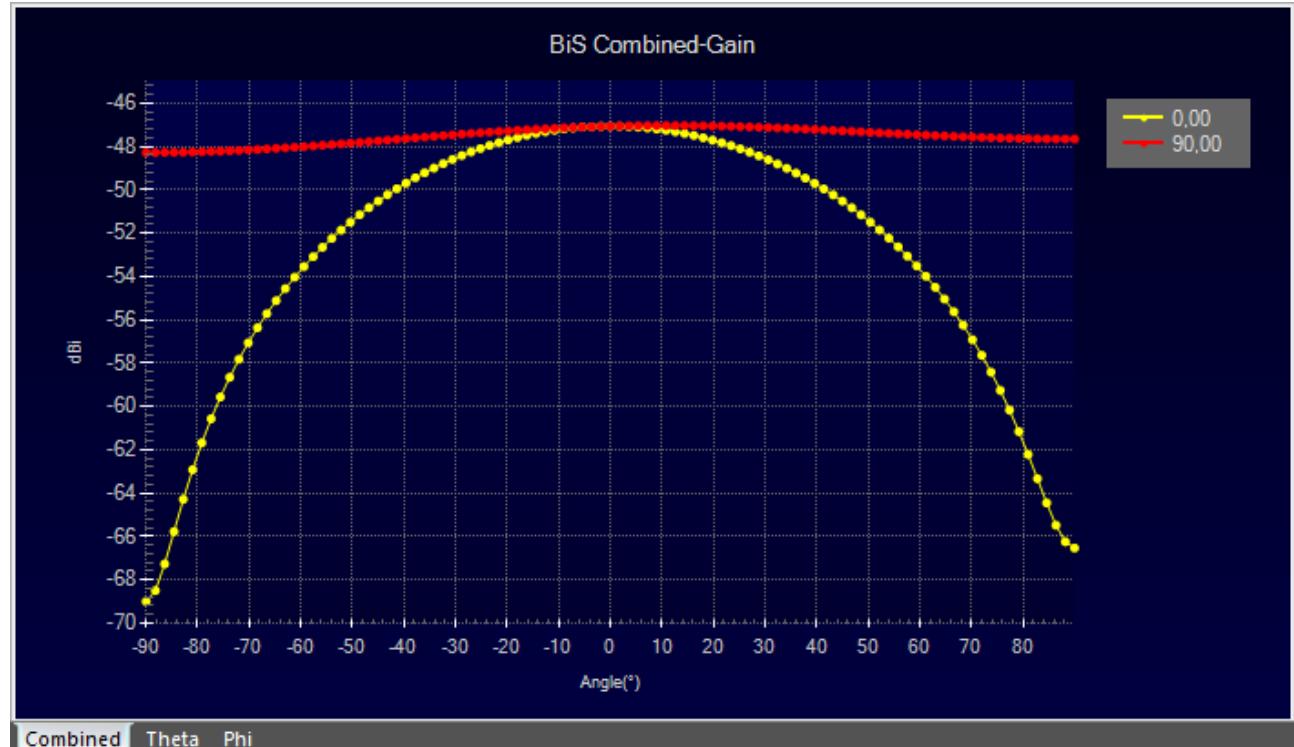


Figure 6-13

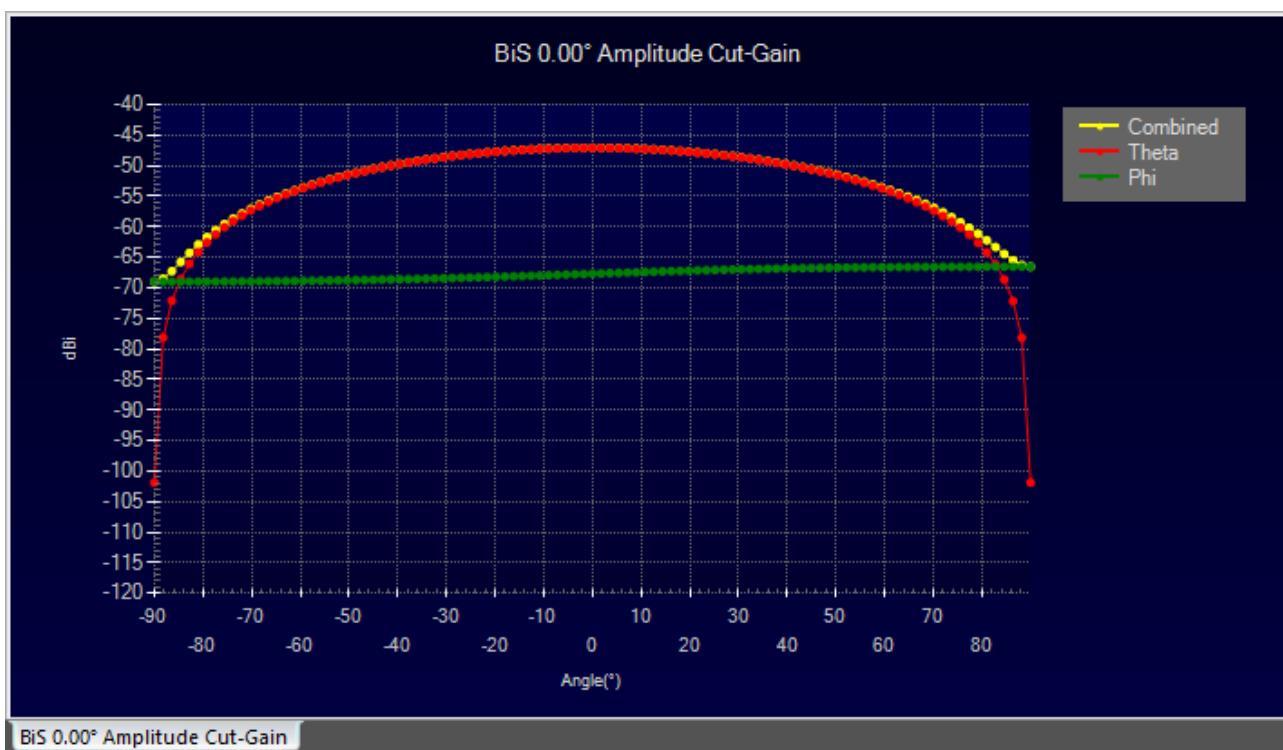


Figure 6-14

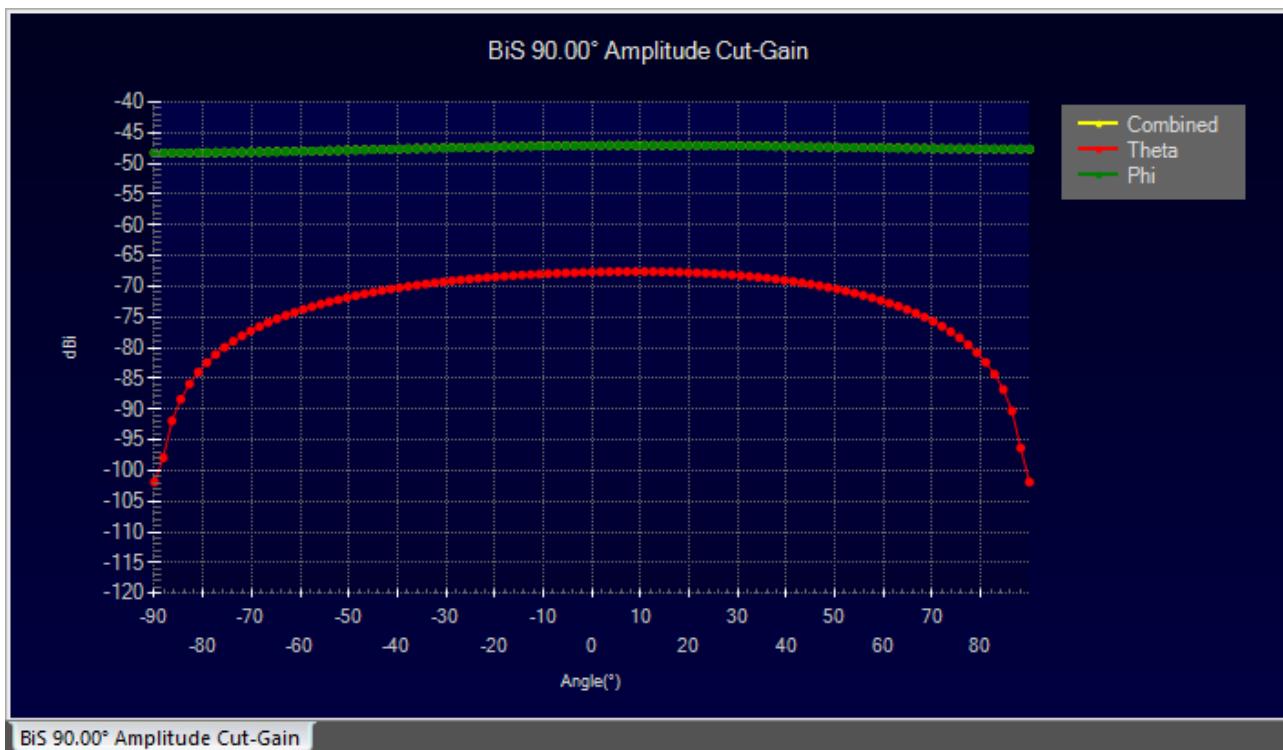


Figure 6-15

Peak EIRP: -34.49dBm.

The fourth configuration is shown in Figure 6-16:

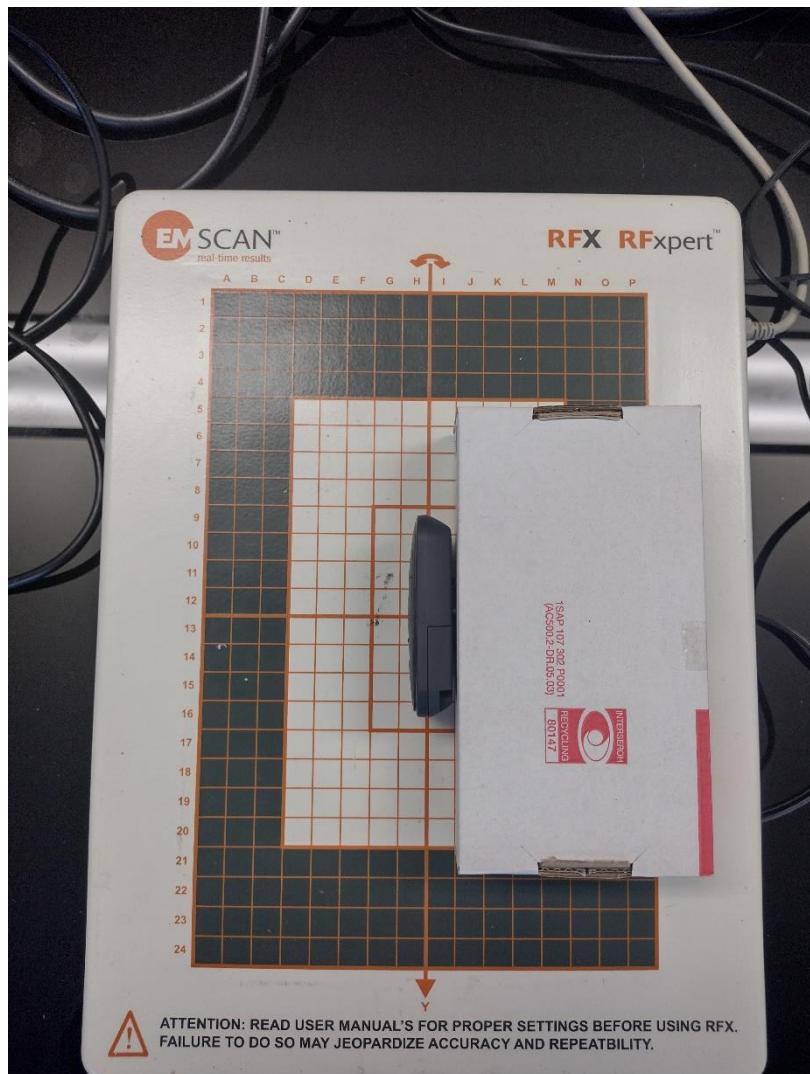


Figure 6-16

In this configuration the radiation lobes are reported below:

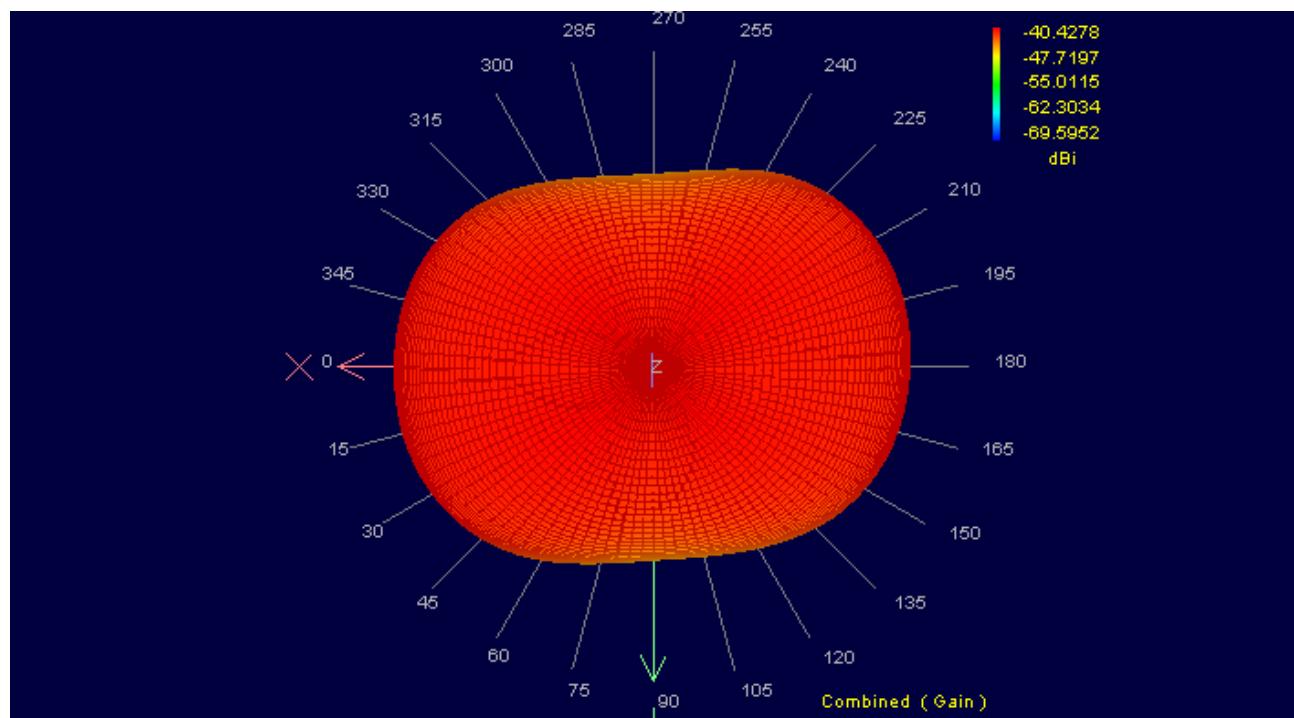


Figure 6-17

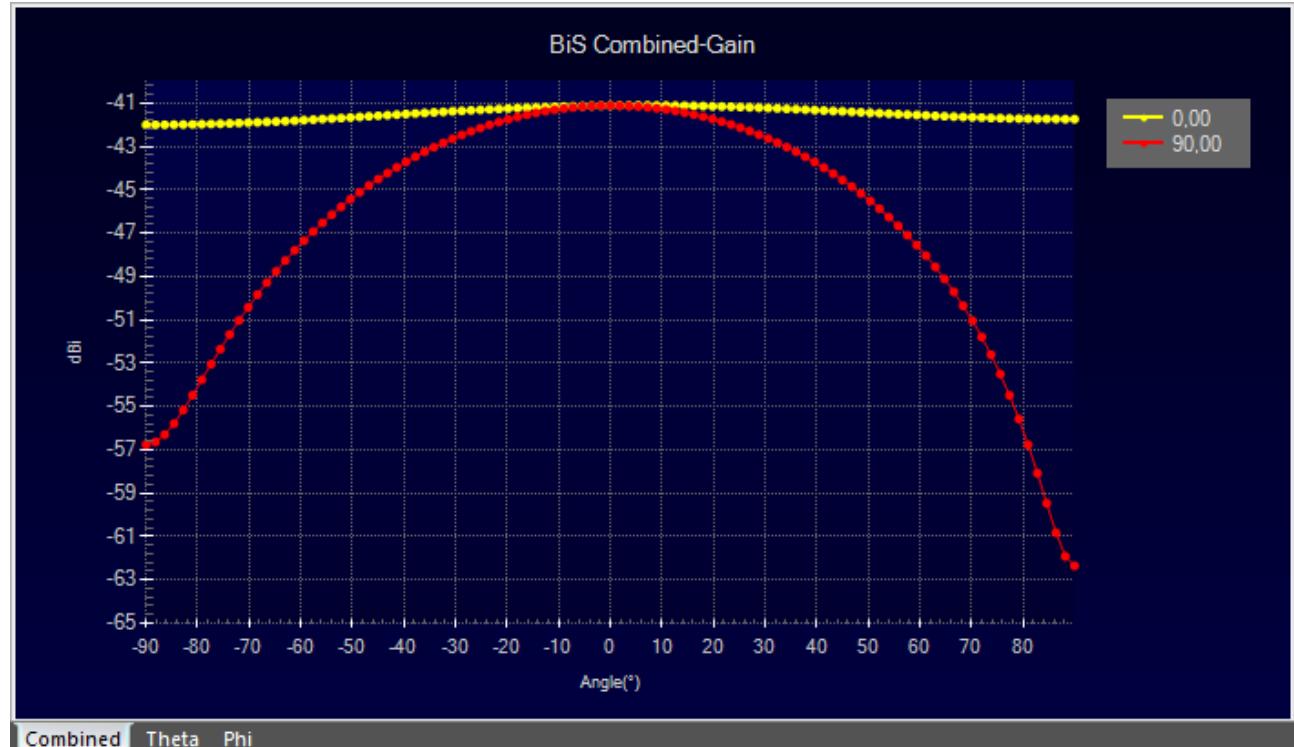


Figure 6-18

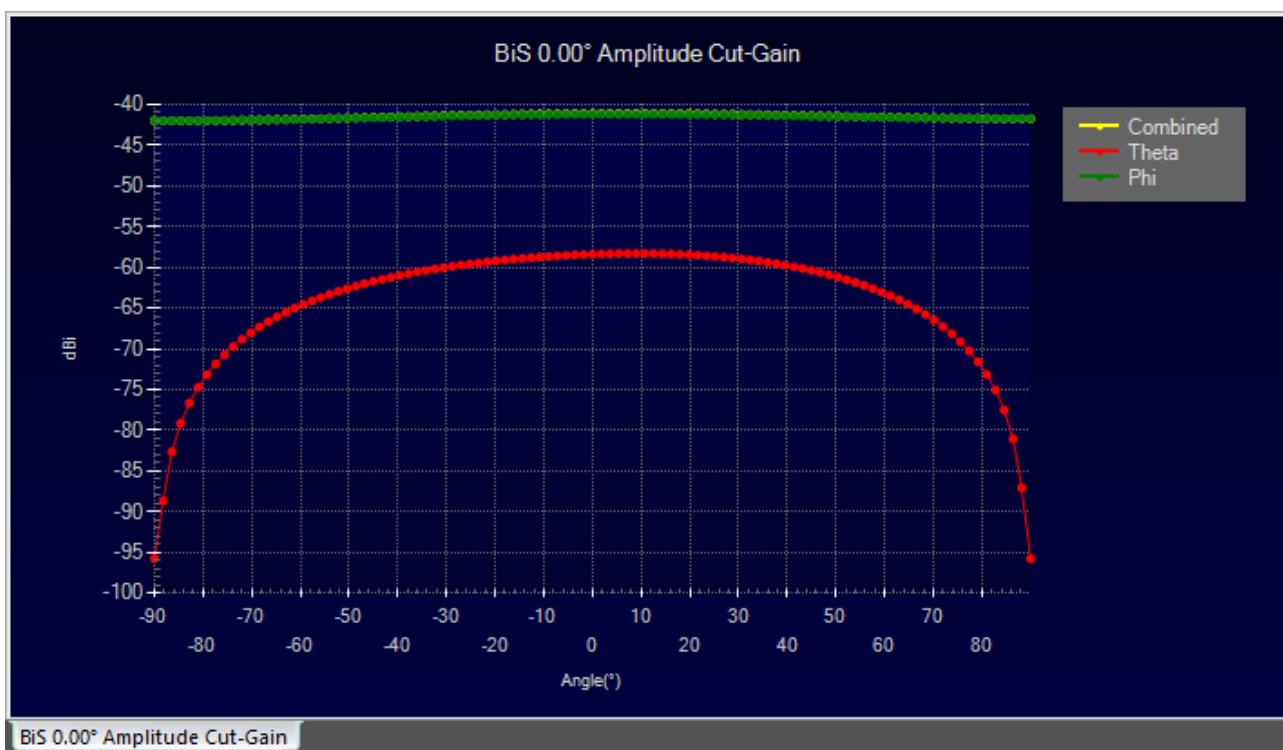


Figure 6-19

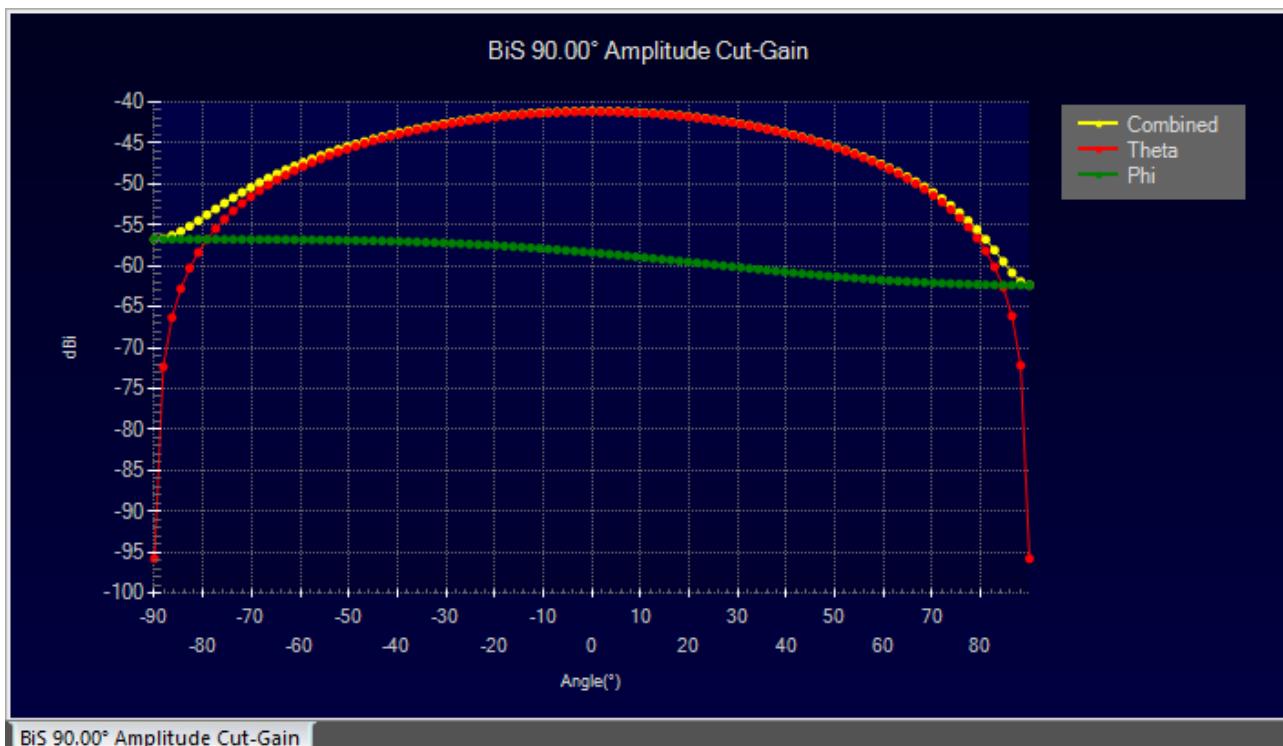


Figure 6-20

Peak EIRP: -29.55dBm.

The fifth configuration is shown in Figure 6-21:

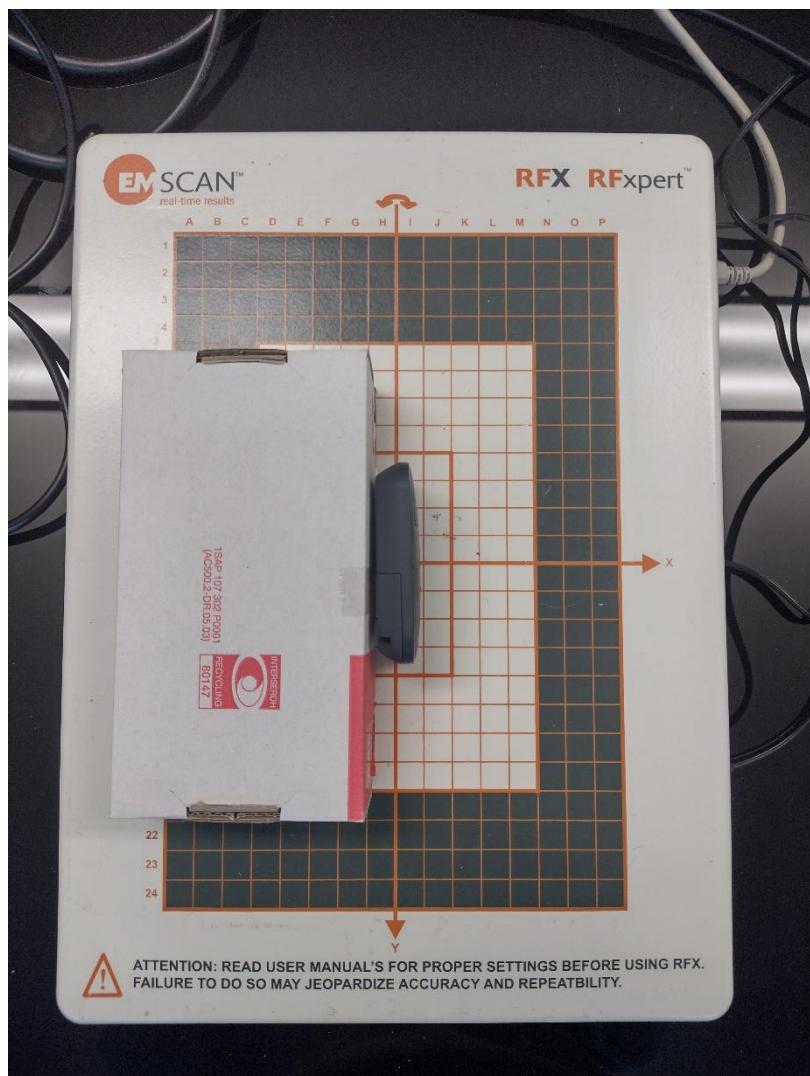


Figure 6-21

In this configuration the radiation lobes are reported below:

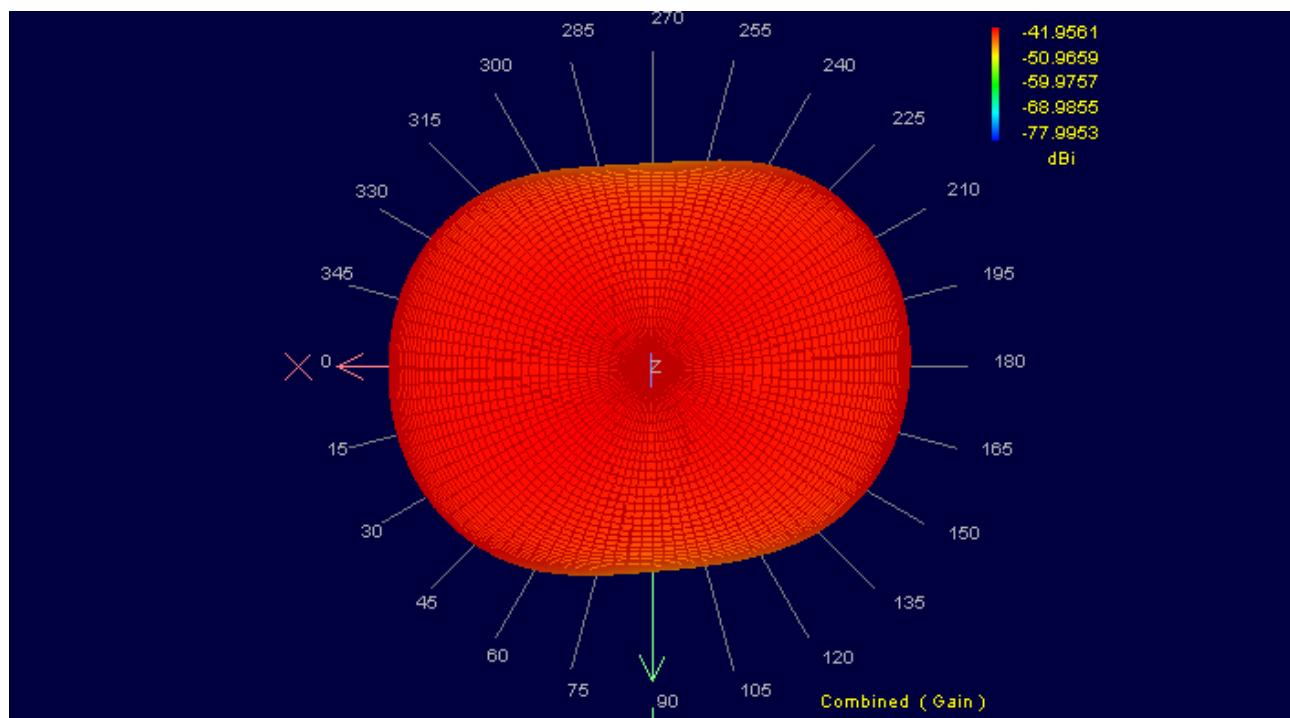


Figure 6-22

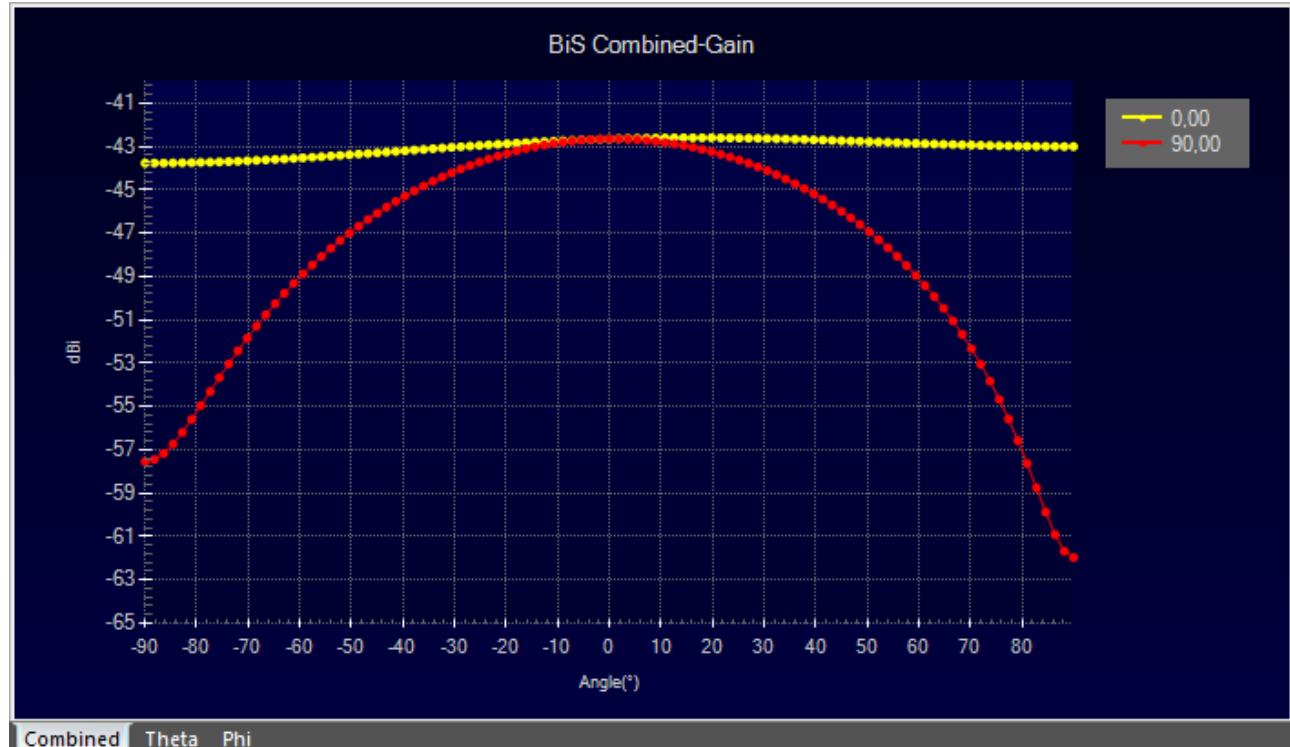


Figure 6-23

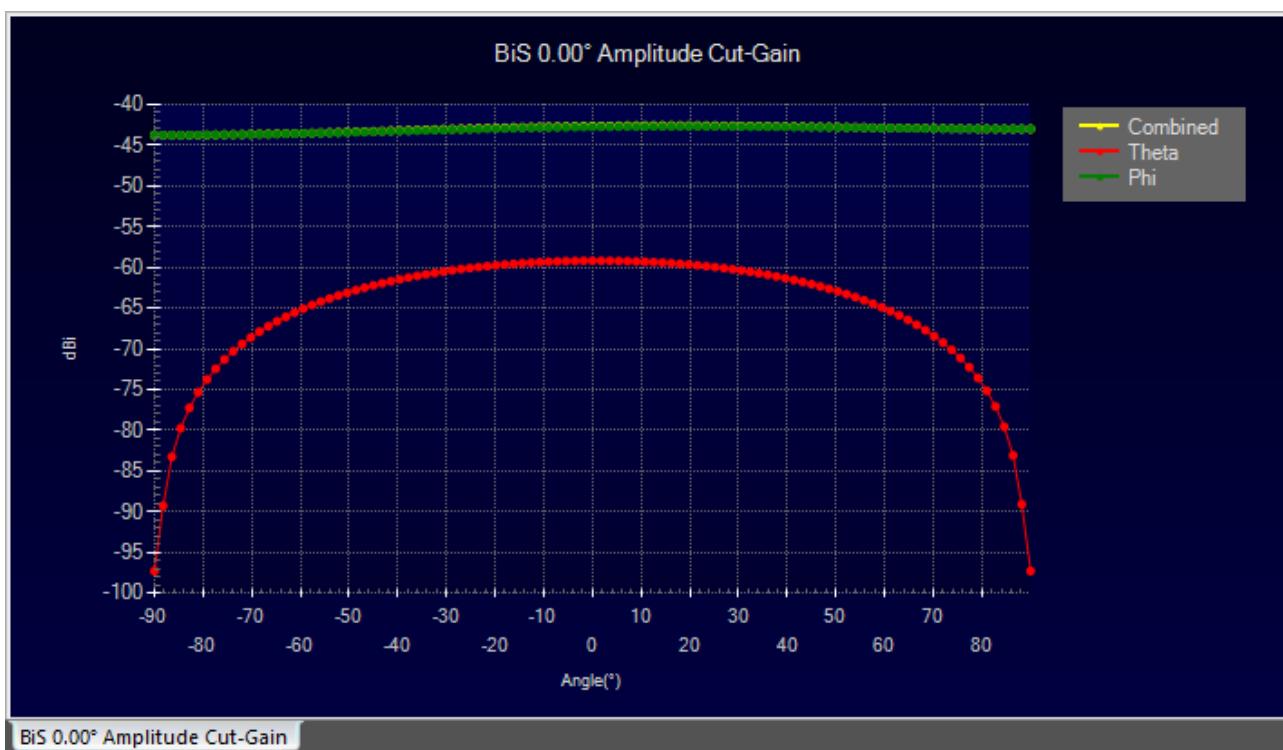


Figure 6-24

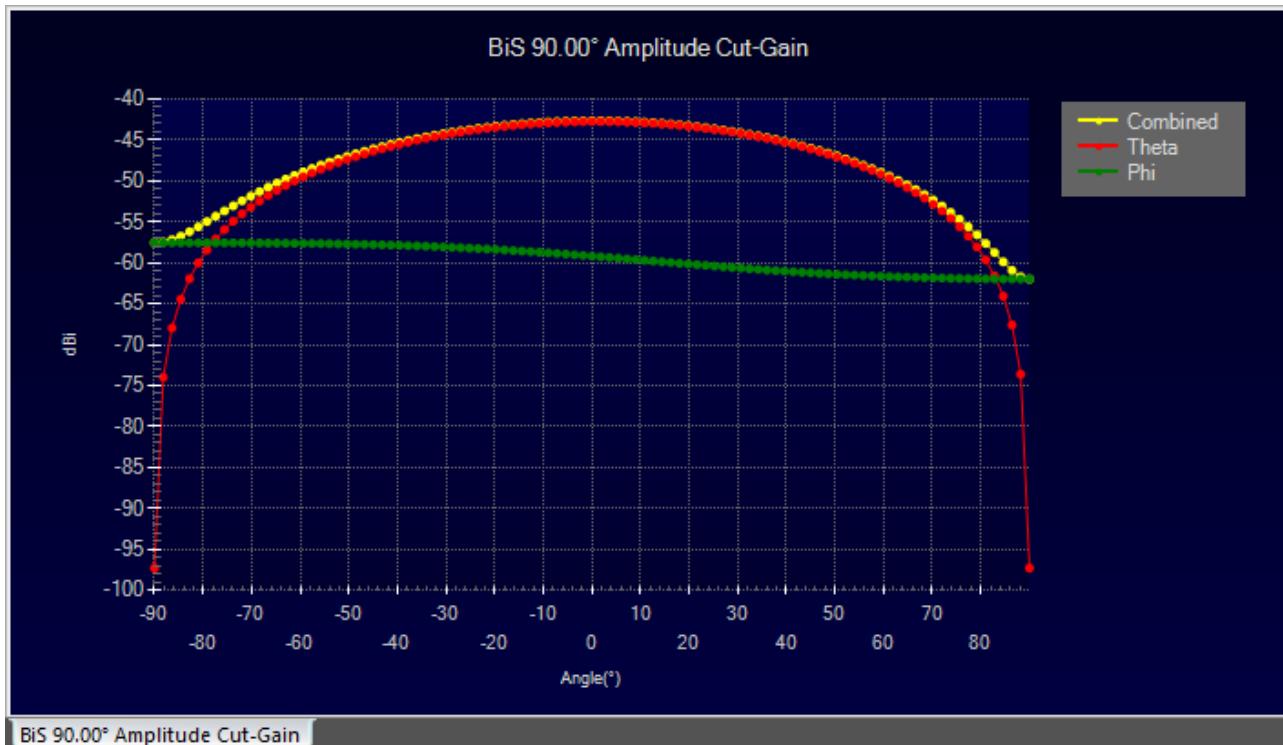


Figure 6-25

Peak EIRP: -31.07dBm.

EIRP peak has been measured with the second configuration.

The original sample has 7,87dB less than the sample used for the preliminary measures. In Dekra chamber the measured radiation peak was 80,34dB μ V/m at 3m.

TRL01016100601
Authors: ML
Date: 31/01/2025



Radiation Lobes of ASSA
Abloy KSTX3 Remote
Control

Converted in dBm EIRP:

80,34dB μ V/m at 3m = -14,89dBm EIRP.

The value 80,34dB μ V/m is the original one before applying duty cycle correction factor. To find a correction factor (although original Dekra measures were realized in semi-anechoic environment while RFXpert can be compared to a measure in an anechoic environment) the EIRP peak measured with RFXpert must be reconducted to the equivalent EIRP peak measured in Dekra Chamber using the measured value:

The correction factor is:

$$P_{FCC} - P_{EIRP_{MAX}} = (-14,89 + 25,49)dB = 10,6dB$$

7 Relevant Radiation Lobes for FCC

The radiation lobes of ASSA Abloy KSTX3 Remote Control toward the back of the remote command are reported below (Note for the customer: the measurement configuration is that one represented in Figure 6-1):

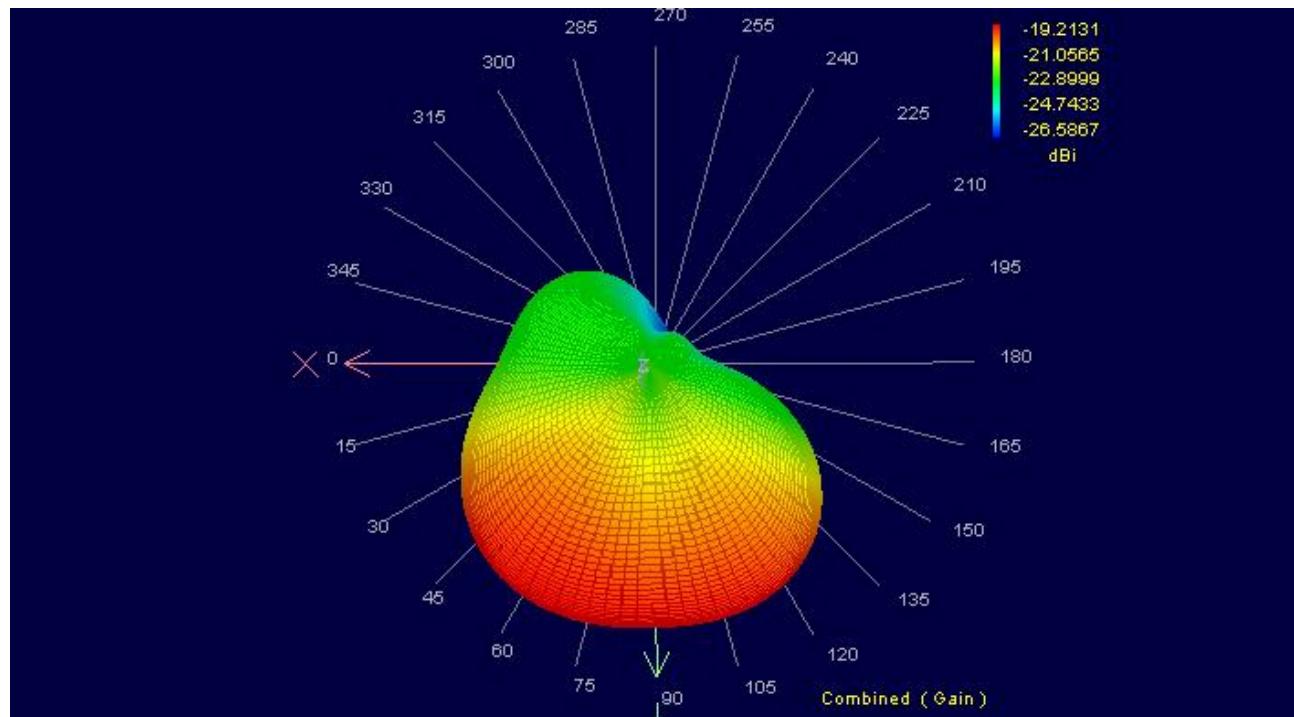


Figure 7-1



Figure 7-2

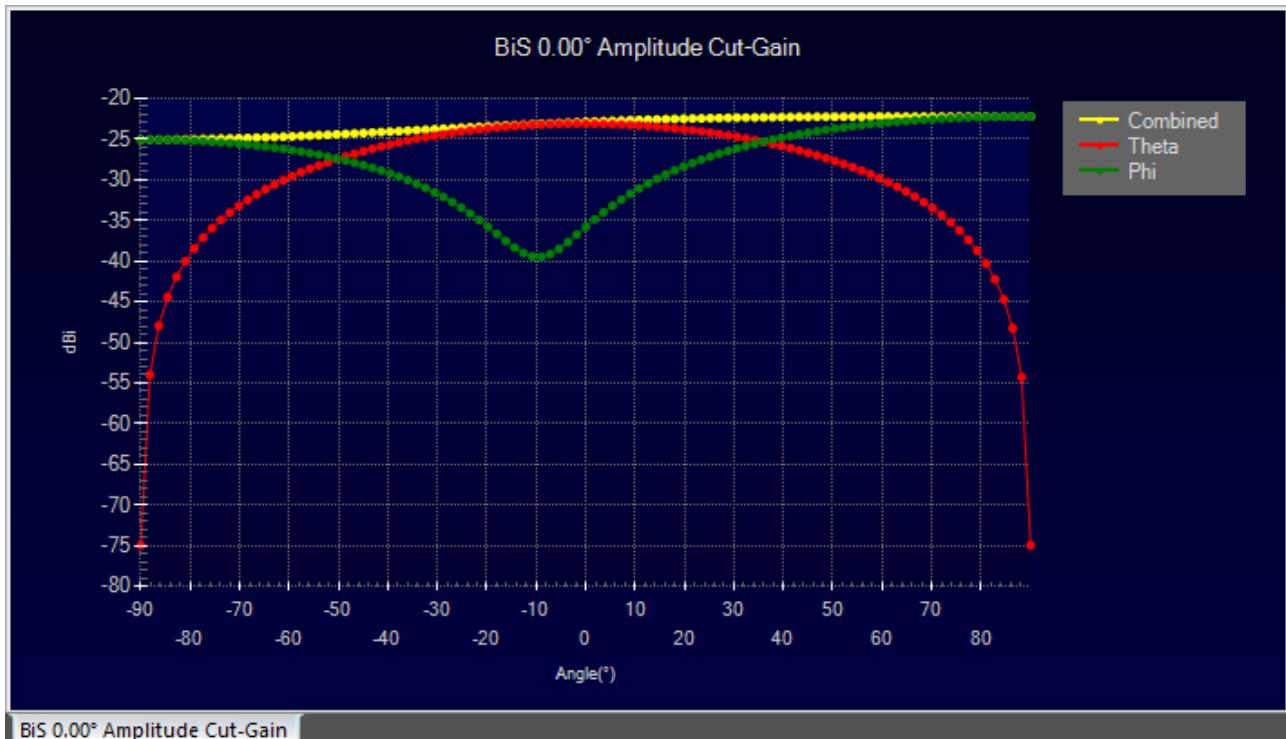


Figure 7-3

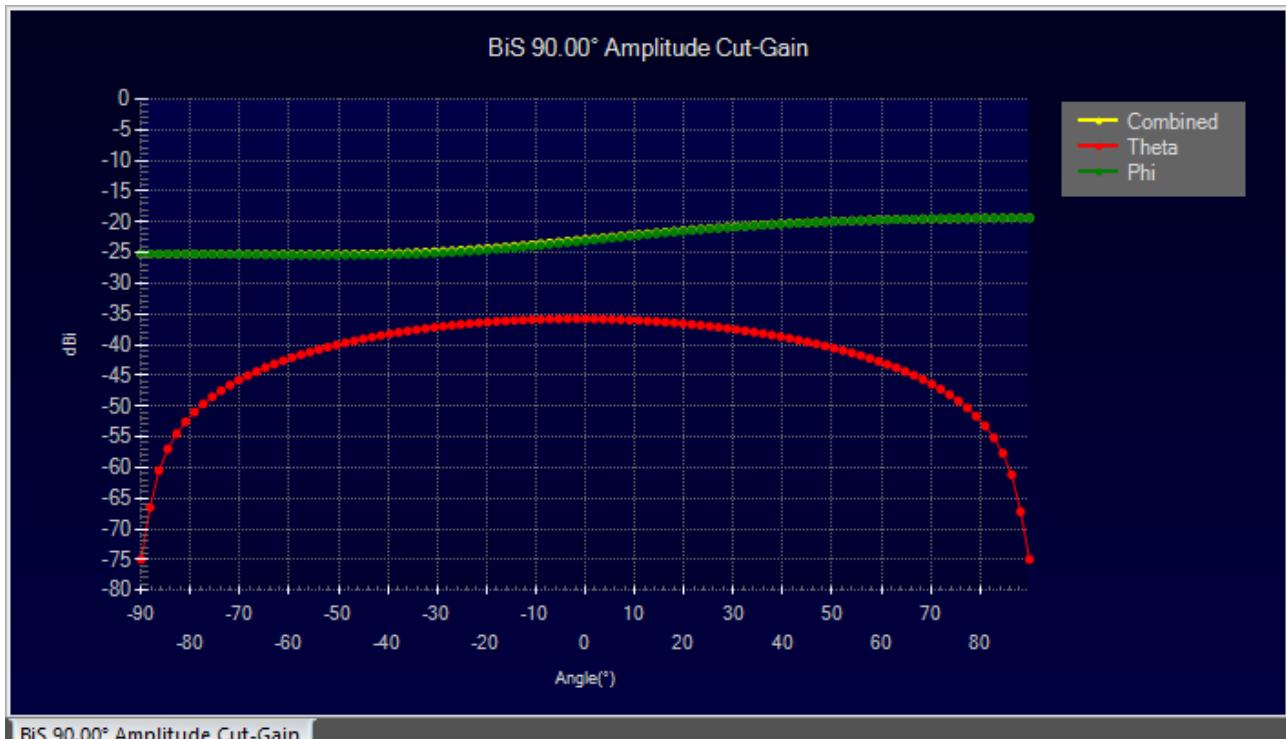


Figure 7-4

Peak Total Gain: -19.2dBi

The radiation lobes of ASSA Abloy KSTX3 Remote Control toward the front of the remote command are reported below (Note for the customer: the measurement configuration is that one represented in Figure 6-6):

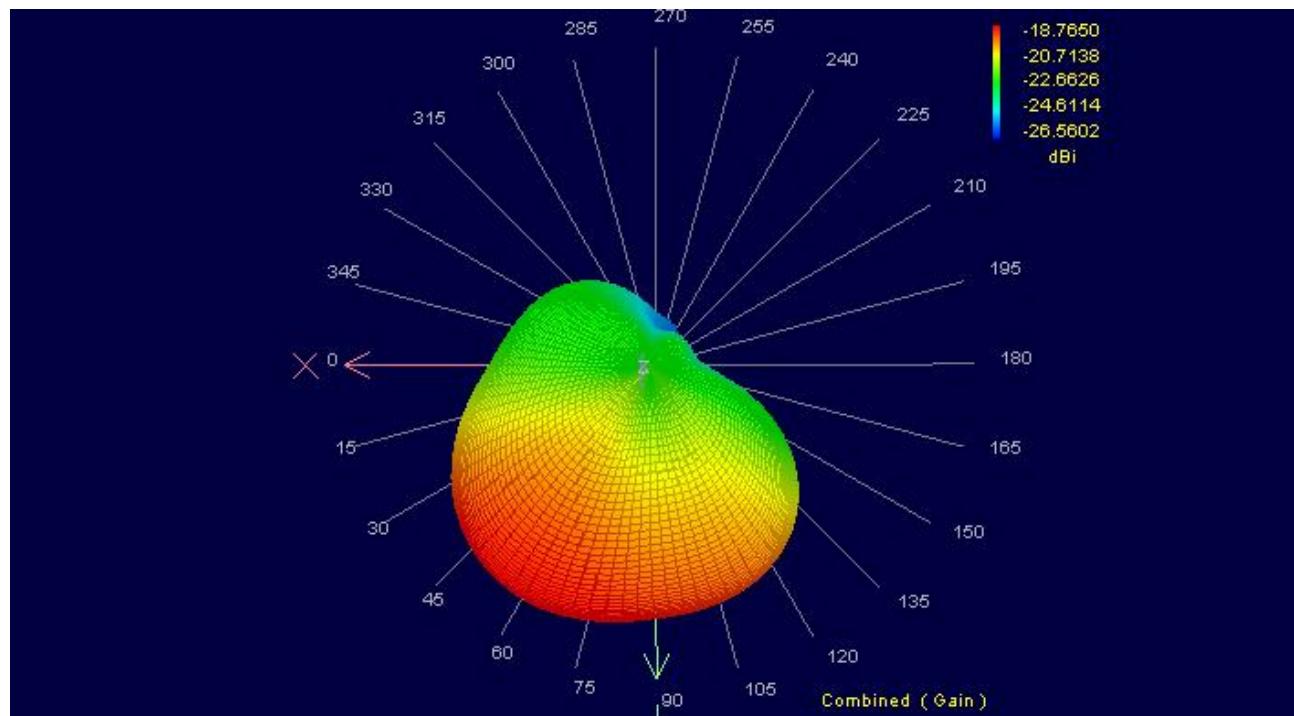


Figure 7-5



Figure 7-6

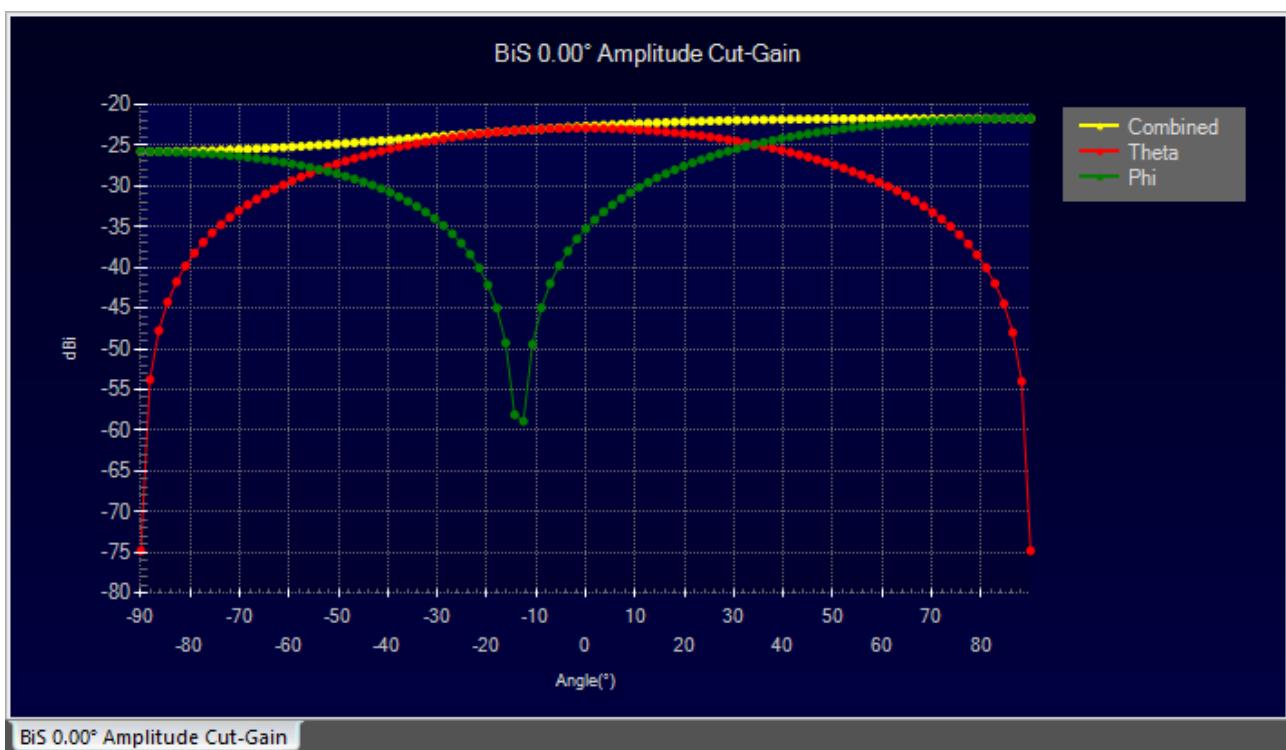


Figure 7-7

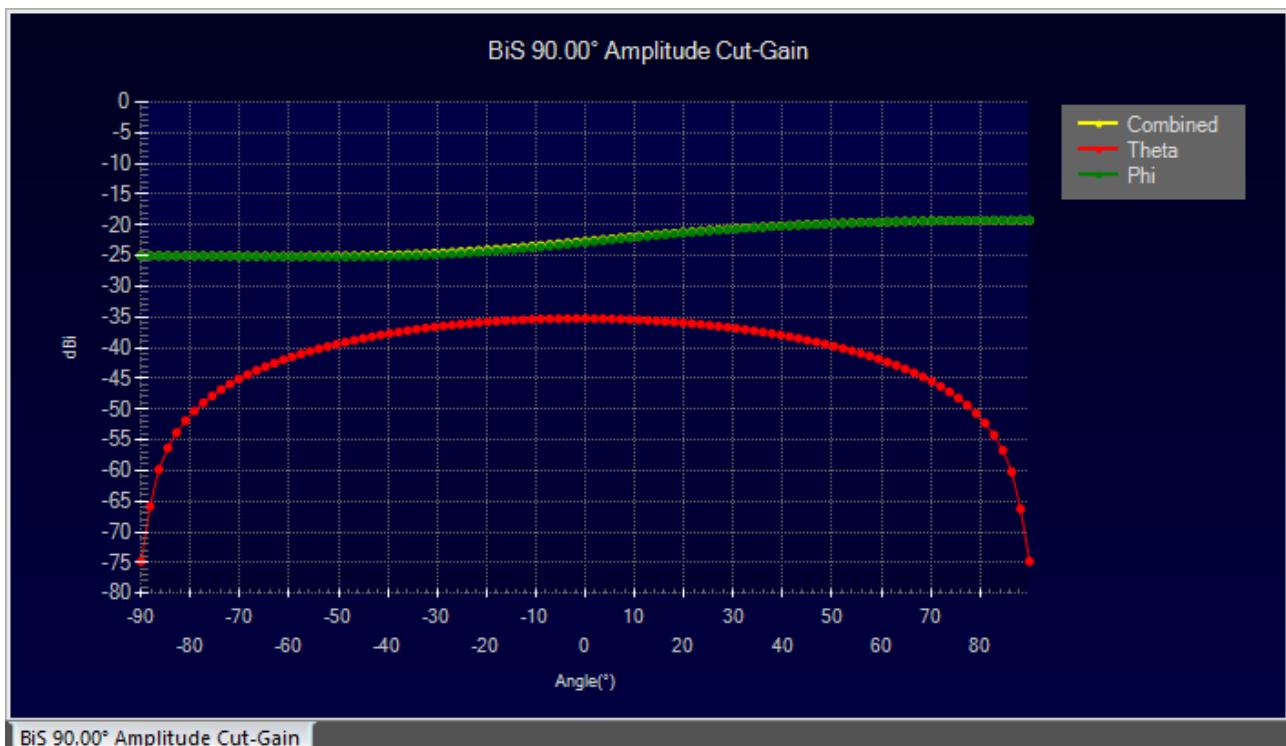


Figure 7-8

Peak Total Gain: -18.8dBi