

# TEST REPORT

Applicant Name : Shenzhen Yusin Technology Co., LTD  
Address : Rm. 309, Bldg. 2, Zhangkeng Youpin Cultural and Creative Park,  
Longhua Dist., Shenzhen, Guangdong, China  
Report Number : SZNS2220815-37066E-RF  
FCC ID: 2A8KU-YS01

**Test Standard (s)**  
FCC Part 15.247

### Sample Description

Product: WIFI smart flashlight AUDIO recorder  
Tested Model: YS-01  
Date Received: 2022-08-15  
Date of Test: 2022-08-15 to 2022-09-22  
Report Date: 2022-09-22

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**

*Roger.Ling*

\_\_\_\_\_  
Roger.Ling  
EMC Engineer

**Approved By:**

*Candy.Li*

\_\_\_\_\_  
Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**Shenzhen Accurate Technology Co., Ltd.**

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	6
EUT EXERCISE SOFTWARE .....	6
DUTY CYCLE .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>FCC§15.247 (i), §1.1307 (b) – RF EXPOSURE.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
TEST RESULT .....	11
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA CONNECTOR CONSTRUCTION .....	12
<b>FCC §15.207 (a) AC LINE CONDUCTED EMISSIONS .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP .....	14
EMI TEST RECEIVER SETUP .....	14
TEST PROCEDURE .....	14
CORRECTED FACTOR & MARGIN CALCULATION .....	15
TEST DATA .....	15
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
EUT SETUP .....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	19
TEST PROCEDURE .....	19
FACTOR & MARGIN CALCULATION .....	19
TEST DATA .....	19
<b>FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH &amp; OCCUPIED BANDWIDTH .....</b>	<b>26</b>
APPLICABLE STANDARD .....	26
TEST PROCEDURE .....	26
TEST DATA .....	26
<b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>27</b>
APPLICABLE STANDARD .....	27
TEST PROCEDURE .....	27
TEST DATA .....	27
<b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>28</b>

---

APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST DATA .....	28
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>APPENDIX A: 6dB Emission Bandwidth .....</b>	<b>30</b>
<b>APPENDIX B: Occupied Channel Bandwidth .....</b>	<b>35</b>
<b>APPENDIX C: Maximum conducted output power .....</b>	<b>40</b>
<b>APPENDIX D: Band edge measurements .....</b>	<b>41</b>
<b>APPENDIX E: Maximum power spectral density .....</b>	<b>45</b>
<b>APPENDIX F: Duty Cycle.....</b>	<b>50</b>

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	WIFI smart flashlight AUDIO recorder
Tested Model	YS-01
Frequency Range	Wi-Fi: 2412~2462 MHz
Maximum Conducted Peak Output Power	Wi-Fi: 802.11b:10.41dBm, 802.11g: 14.24dBm, 802.11n-HT20: 14.17dBm
Modulation Technique	Wi-Fi: DSSS, OFDM
Antenna Specification*	Internal Antenna: 1.82dBi (provided by the applicant)
Voltage Range	DC3.7V from battery or DC 5V from USB port
Sample serial number	SZNS2220815-37066-RF-S1 (Assigned by ATC)
Sample/EUT Status	Good condition

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, and KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		$0.082 \times 10^{-7}$
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.

### Equipment Modifications

No modification was made to the EUT tested.

### EUT Exercise Software

Software “Wifi Test Tool v1.4.0.exe”\* was used during testing and power level as below:

Item	Mode	Data Rate (Mbps)	Power Level*
2.4G Wi-Fi	802.11 b	1	0
	802.11 g	6	0
	802.11 n20	MCS	0

The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

### Duty cycle

Test Result: Compliant. Please refer to the Appendix F

### Equipment Modifications

No modification was made to the EUT tested.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
Shenzhen EYA CO ,LTD.	Adapter	EYA-00500100	A1906038835
Kingston	SD Card	Unknown	Unknown

**External I/O Cable**


Cable Description	Length (m)	From Port	To
Unshielded Detachable USB Cable	0.6	adapter	EUT

**Block Diagram of Test Setup**

For Conducted emission

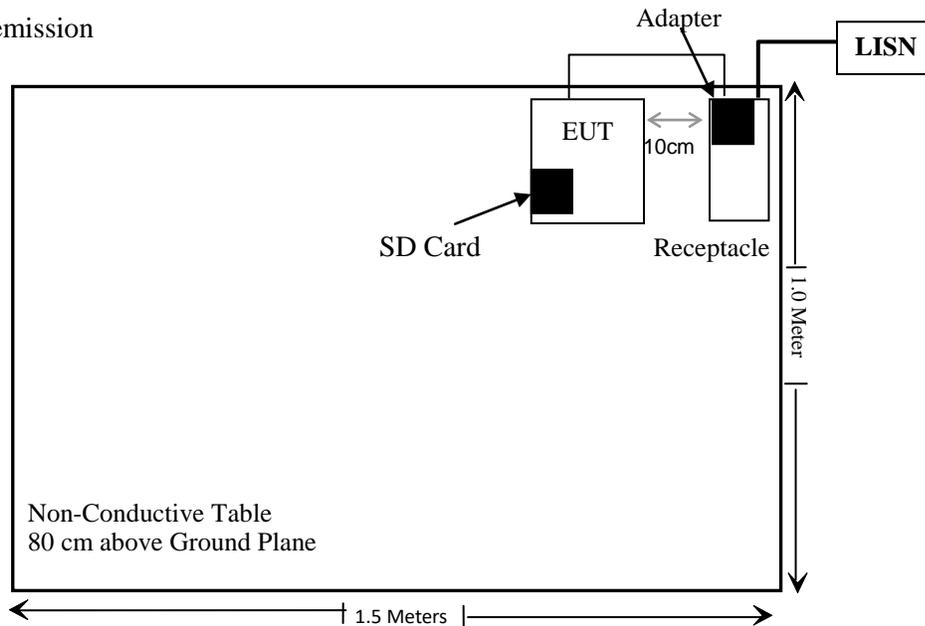

For Radiated emission

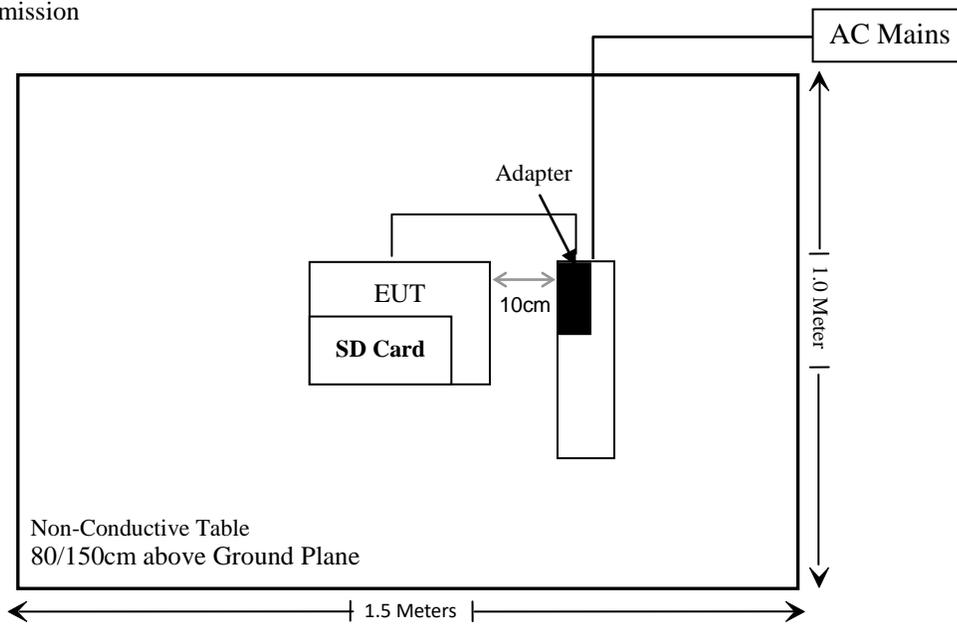

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
FCC §15.247 (i) & §2.1307(b)	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2021/12/13	2022/12/12
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.33	RF-03	Each time	

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC§15.247 (i), §1.1307 (b) – RF EXPOSURE

### Applicable Standard

According to §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.3.1-SAR-Based Exemption:

A more comprehensive exemption, considering a variable power threshold that depends on both the separation distance and power, is provided in § 1.1307(b)(3)(i)(B). This exemption is applicable to the frequency range between 300 MHz and 6 GHz, with test separation distances between 0.5 cm and 40 cm, and for all RF sources in fixed, mobile, and portable device exposure conditions.

Accordingly, a RF source is considered an RF exempt device if its available maximum time-averaged (matched conducted) power or its effective radiated power (ERP), whichever is greater, are below a specified threshold. This exemption threshold was derived based on general population 1-g SAR requirements and is detailed in Appendix C.

### Test Result

**Worst case for this handheld device:**

Mode	Frequency	Maximum Tune-up Average Conducted Power	Antenna Gain		ERP	ERP <sub>20cm</sub>	Distance	SAR-Based Exclusion Threshold (For 10-g extremity SAR)		SAR-Based Exclusion
	(MHz)		(dBm)	(dBi)				(dBd)	(mW)	
2.4G Wi-Fi	2412-2462	8.0	1.82	-0.33	7.67	3060	5	6.83	8.34	Yes

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

**Result:** Compliant.

---

## FCC §15.203 - ANTENNA REQUIREMENT

---

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Antenna Connector Construction

The EUT has one Internal Antenna arrangement, which was permanently attached and the antenna gain is 1.82dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliant.

## FCC § 15.207 (a) AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC § 15.207 (a)

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50  $\mu$ H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.


For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 <sup>1</sup>	56 to 46 <sup>1</sup>
0.5 – 5	56	46
5 – 30	60	50

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

## EUT Setup

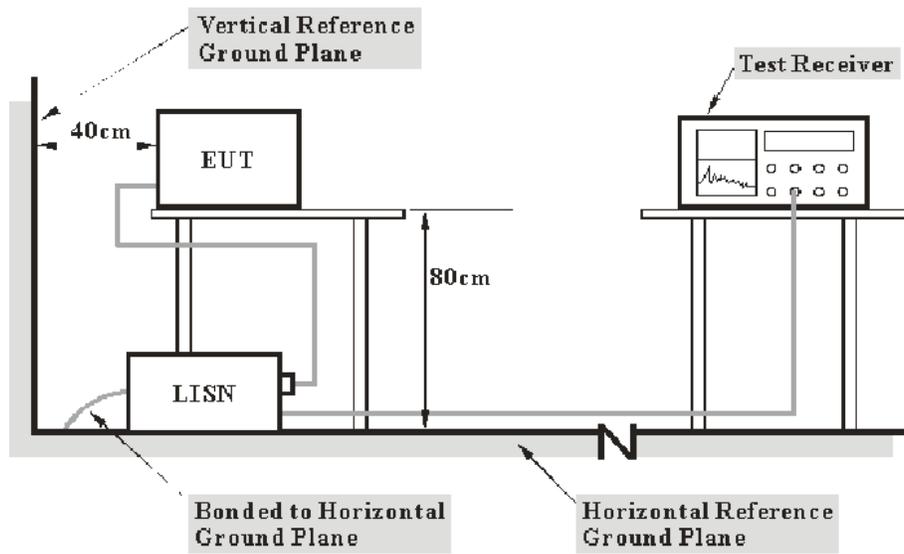

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data


### Environmental Conditions

<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	40 %
<b>ATM Pressure:</b>	101.2 kPa

*The testing was performed by Jason Liu on 2022-09-09.*

*EUT operation mode: Transmitting*


120V/60 Hz, Line

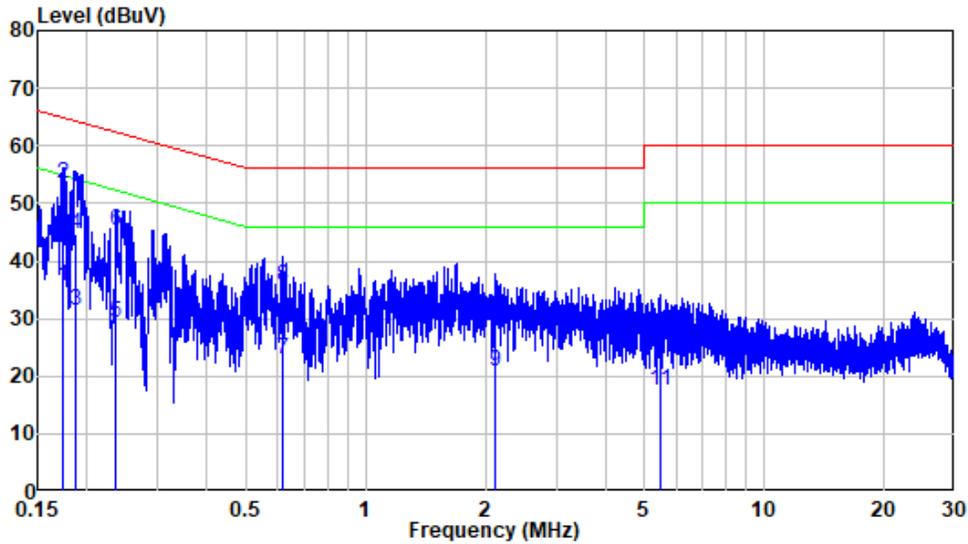

Site : Shielding Room  
 Condition: Line  
 Job No. : SZNS2220815-37066E-RF  
 Mode : 2.4G WIFI Transmitting  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.174	9.80	25.81	35.61	54.75	-19.14	Average
2	0.174	9.80	43.65	53.45	64.75	-11.30	QP
3	0.187	9.80	21.47	31.27	54.16	-22.89	Average
4	0.187	9.80	35.02	44.82	64.16	-19.34	QP
5	0.236	9.80	19.40	29.20	52.24	-23.04	Average
6	0.236	9.80	35.48	45.28	62.24	-16.96	QP
7	0.616	9.81	13.02	22.83	46.00	-23.17	Average
8	0.616	9.81	25.89	35.70	56.00	-20.30	QP
9	2.114	9.82	10.88	20.70	46.00	-25.30	Average
10	2.114	9.82	20.69	30.51	56.00	-25.49	QP
11	5.458	9.85	7.75	17.60	50.00	-32.40	Average
12	5.458	9.85	16.85	26.70	60.00	-33.30	QP

**AC 120V/60 Hz, Neutral**

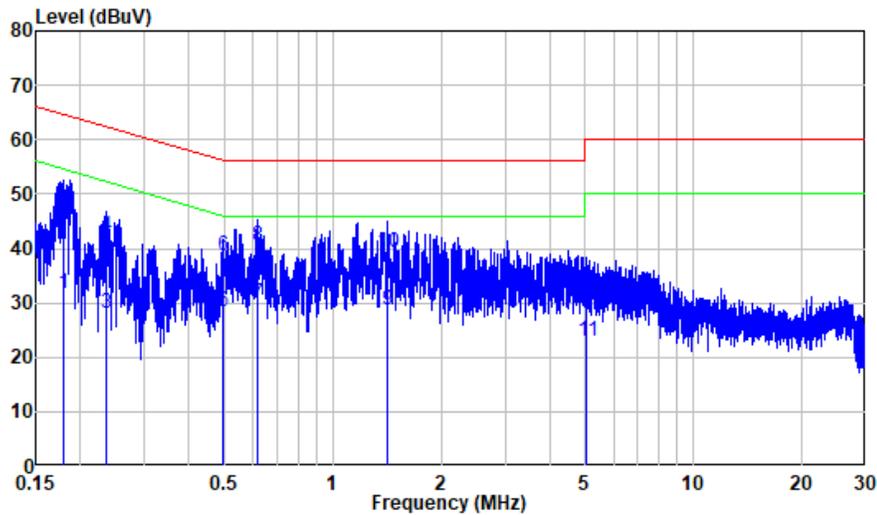

Site : Shielding Room  
 Condition: Neutral  
 Job No. : SZNS2220815-37066E-RF  
 Mode : 2.4G WIFI Transmitting  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.179	9.80	21.90	31.70	54.51	-22.81	Average
2	0.179	9.80	37.37	47.17	64.51	-17.34	QP
3	0.235	9.80	18.42	28.22	52.26	-24.04	Average
4	0.235	9.80	32.52	42.32	62.26	-19.94	QP
5	0.495	9.80	18.53	28.33	46.08	-17.75	Average
6	0.495	9.80	28.96	38.76	56.08	-17.32	QP
7	0.620	9.81	20.08	29.89	46.00	-16.11	Average
8	0.620	9.81	30.77	40.58	56.00	-15.42	QP
9	1.419	9.81	19.02	28.83	46.00	-17.17	Average
10	1.419	9.81	29.43	39.24	56.00	-16.76	QP
11	5.055	9.89	13.11	23.00	50.00	-27.00	Average
12	5.055	9.89	21.73	31.62	60.00	-28.38	QP


## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### EUT Setup

#### Below 1 GHz:

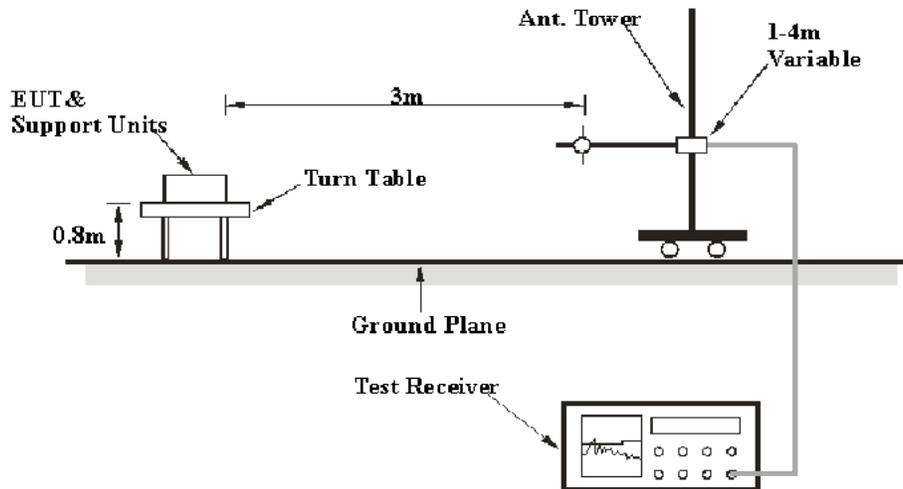

#### Above 1GHz:

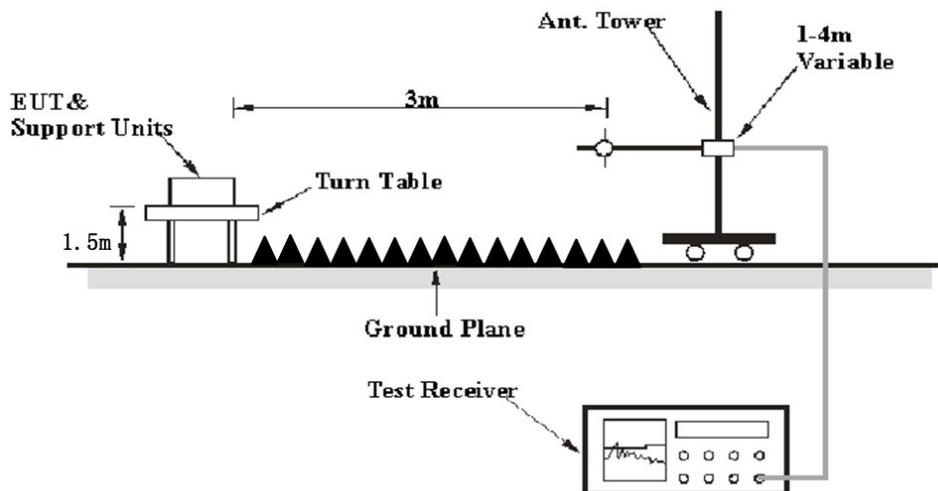

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz <sup>Note 1</sup>	/	Average
	1MHz	> 1/T <sup>Note 2</sup>	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

If the maximized peak measured value complies with the limit, then it is unnecessary to perform QP/Average measurement.

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

### Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25~26 °C
<b>Relative Humidity:</b>	62~65 %
<b>ATM Pressure:</b>	101.0~101.3 kPa


The testing was performed by Level Li from 2022-8-15 to 2022-8-31.

EUT operation mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case orientation was recorded as setup photos)

**30MHz-1GHz: (Worst case)**

**Wi-Fi: 802.11b mode, Middle Channel**


**Horizontal**

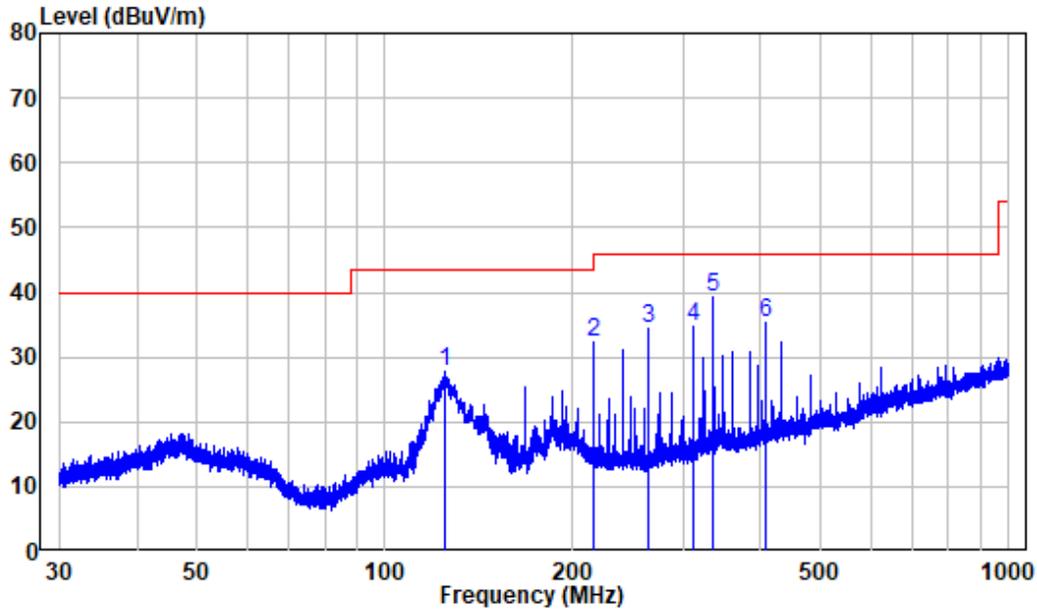

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : SZNS2220815-37066E-RF  
 Test Mode: 2.4G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	125.116	-14.32	42.02	27.70	43.50	-15.80	Peak
2	216.024	-11.63	43.93	32.30	46.00	-13.70	Peak
3	264.050	-10.48	44.74	34.26	46.00	-11.74	Peak
4	312.043	-8.82	43.60	34.78	46.00	-11.22	Peak
5	336.035	-7.58	46.88	39.30	46.00	-6.70	Peak
6	408.051	-6.49	41.84	35.35	46.00	-10.65	Peak

Vertical

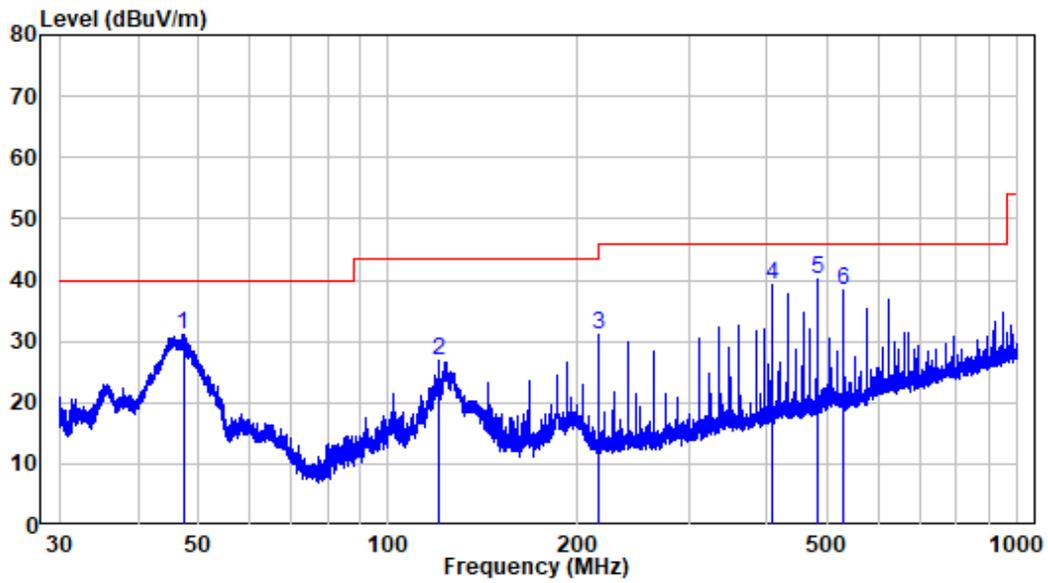

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS2220815-37066E-RF  
 Test Mode: 2.4G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.222	-10.00	41.03	31.03	40.00	-8.97	Peak
2	120.013	-13.53	40.28	26.75	43.50	-16.75	Peak
3	216.024	-11.63	42.60	30.97	46.00	-15.03	Peak
4	408.051	-6.49	45.85	39.36	46.00	-6.64	Peak
5	480.107	-5.00	45.13	40.13	46.00	-5.87	QP
6	528.014	-4.48	42.68	38.20	46.00	-7.80	Peak

**1-25 GHz:**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV		Height (m)	Polar (H/V)				
802.11B, Low Channel									
2310	46.24	PK	312	1.9	H	-7.23	39.01	74	-34.99
2310	45.12	PK	263	1.6	V	-7.23	37.89	74	-36.11
2390	48.03	PK	82	1.3	H	-7.21	40.82	74	-33.18
2390	45.78	PK	197	1.1	V	-7.21	38.57	74	-35.43
4824	50.35	PK	232	1.4	H	-3.53	46.82	74	-27.18
4824	47.99	PK	45	1.3	V	-3.53	44.46	74	-29.54
802.11B, Middle Channel									
4874	50.86	PK	92	1.2	H	-3.42	47.44	74	<b>-26.56</b>
4874	49.54	PK	359	1.8	V	-3.42	46.12	74	-27.88
802.11B, High Channel									
2483.5	52.2	PK	211	2.1	H	-7.2	45.00	74	-29.00
2483.5	47.07	PK	62	1.6	V	-7.2	39.87	74	-34.13
2500	47.74	PK	334	1.2	H	-7.18	40.56	74	-33.44
2500	44.71	PK	228	2.1	V	-7.18	37.53	74	-36.47
4924	48.62	PK	262	1.4	H	-3.16	45.46	74	-28.54
4924	46.89	PK	22	1.3	V	-3.16	43.73	74	-30.27
802.11G, Low Channel									
2310	46.81	PK	48	2.1	H	-7.23	39.58	74	-34.42
2310	45.49	PK	38	1.6	V	-7.23	38.26	74	-35.74
2390	57.64	PK	127	1.4	H	-7.21	50.43	74	-23.57
2390	56.03	PK	233	2.1	V	-7.21	48.82	74	-25.18
4824	45.33	PK	236	2.0	H	-3.53	41.80	74	-32.20
4824	44.78	PK	256	2.2	V	-3.53	41.25	74	-32.75
802.11G, Middle Channel									
4874	45.85	PK	186	1.1	H	-3.42	42.43	74	-31.57
4874	45.17	PK	176	2.1	V	-3.42	41.75	74	-32.25
802.11G, High Channel									
2483.5	72.23	PK	69	2.0	H	-7.2	65.03	74	-8.97
2483.5	59	AV	69	2.0	H	-7.2	51.80	54	-2.20
2483.5	68.19	PK	145	1.2	V	-7.2	60.99	74	-13.01
2483.5	54.02	AV	145	1.2	V	-7.2	46.82	54	-7.18
2500	57.15	PK	32	2.0	H	-7.18	49.97	74	-24.03
2500	51.18	PK	288	1.2	V	-7.18	44.00	74	-30.00
4924	47.14	PK	221	1.2	H	-3.16	43.98	74	-30.02
4924	45.68	PK	74	1.4	V	-3.16	42.52	74	-31.48
802.11N20, Low Channel									
2310	44.77	PK	339	1.6	H	-7.23	37.54	74	-36.46
2310	44.72	PK	235	2.0	V	-7.23	37.49	74	-36.51
2390	54.36	PK	183	2.2	H	-7.21	47.15	74	-26.85

2390	47.05	PK	15	1.1	V	-7.21	39.84	74	-34.16
4824	45.54	PK	54	2.0	H	-3.53	42.01	74	-31.99
4824	45.07	PK	296	1.8	V	-3.53	41.54	74	-32.46
802.11N20, Middle Channel									
4874	47.25	PK	18	1.7	H	-3.42	43.83	74	-30.17
4874	46.17	PK	223	1.7	V	-3.42	42.75	74	-31.25
802.11N20, High Channel									
2483.5	73.68	PK	263	1.7	H	-7.2	66.48	74	-7.52
2483.5	59.39	AV	263	1.7	H	-7.2	52.19	54	-1.81
2483.5	69.93	PK	84	2.2	V	-7.2	62.73	74	-11.27
2483.5	55.59	AV	84	2.2	V	-7.2	48.39	54	-5.61
2500	58.99	PK	212	1.1	H	-7.18	51.81	74	-22.19
2500	53.56	PK	335	1.4	V	-7.18	46.38	74	-27.62
4924	48.75	PK	94	1.1	H	-3.16	45.59	74	-28.41
4924	45.36	PK	25	1.3	V	-3.16	42.20	74	-31.80

**Note:**

Absolute Level = Reading Level + Substituted Factor

Substituted Factor contains: SG Level - Cable loss+ Antenna Gain


Margin = Absolute Level – Limit

The other spurious emission which is in the noise floor level was not recorded.


For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

1-18 GHz: (Worst case)

Pre-scan plots  
802.11 b Middle Channel  
Horizontal

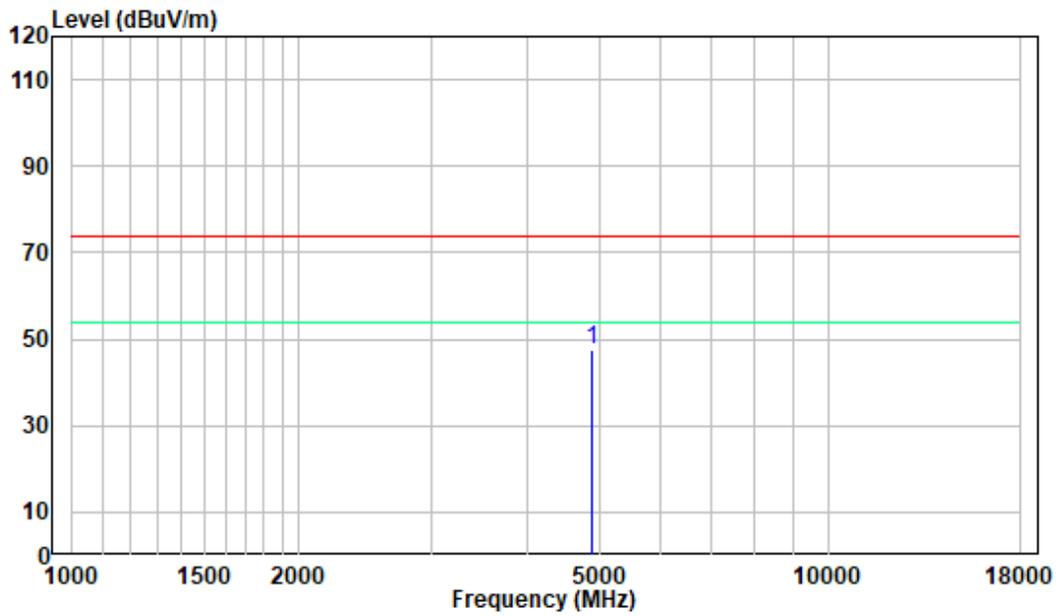


Vertical

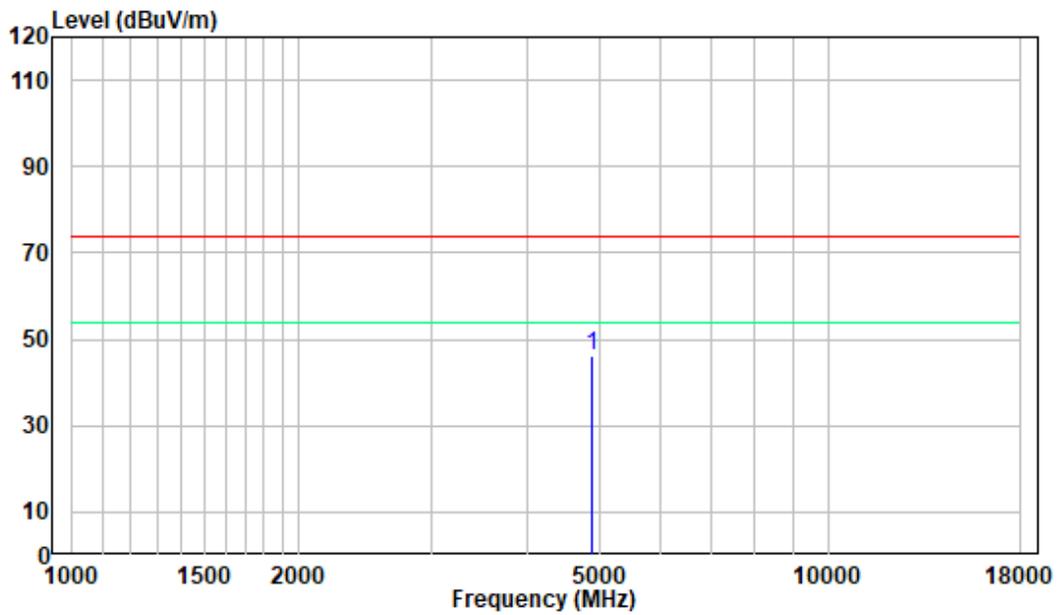


18 -25GHz: (Worst case)

**Pre-scan plots  
802.11 b Middle Channel  
Horizontal**

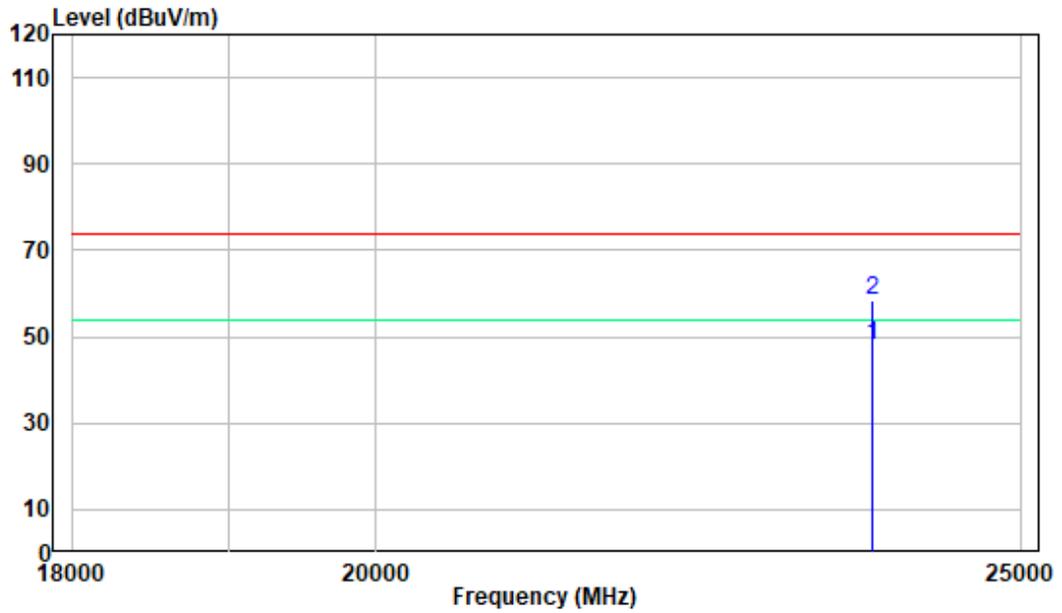

**Vertical**

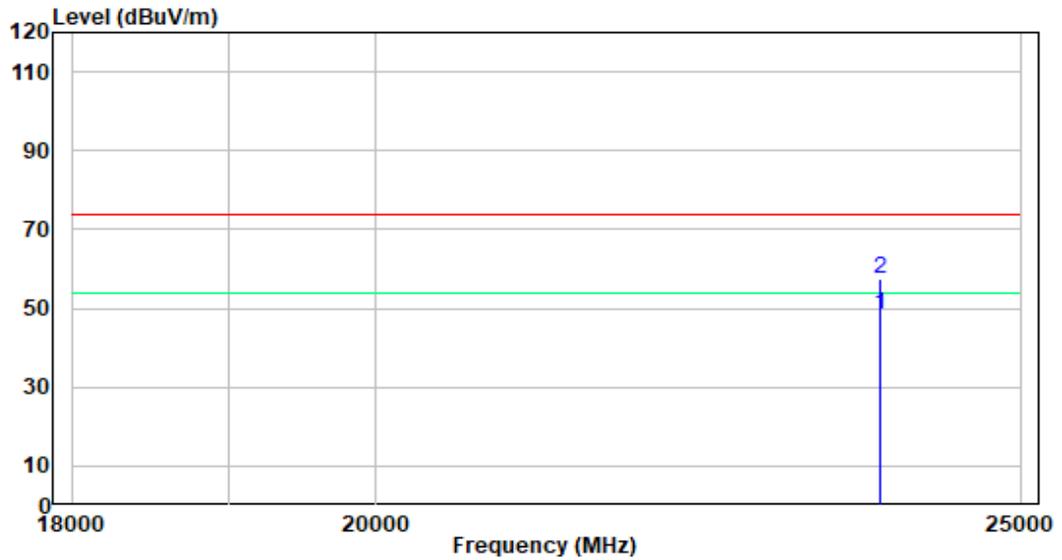

## FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24°C
<b>Relative Humidity:</b>	48%
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Glenn. Jiang on 2022-09-22.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix A and Appendix B.


## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

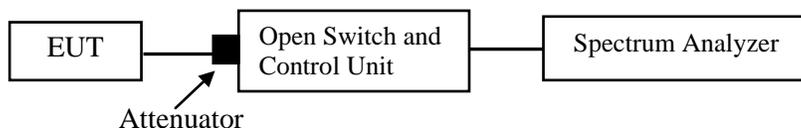

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24°C
<b>Relative Humidity:</b>	48%
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Glenn. Jiang on 2022-09-22.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix C.

## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24°C
<b>Relative Humidity:</b>	48%
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Glenn. Jiang on 2022-09-22.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix D.


## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24°C
<b>Relative Humidity:</b>	48%
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Glenn. Jiang on 2022-09-22.*

*EUT operation mode: Transmitting*


Test Result: Compliant. Please refer to the Appendix E.



## APPENDIX A: 6dB Emission Bandwidth



### Test Result



TestMode	Antenna	Channel [MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.600	0.5	PASS
		2437	9.600	0.5	PASS
		2462	10.050	0.5	PASS
11G	Ant1	2412	15.210	0.5	PASS
		2437	15.210	0.5	PASS
		2462	15.210	0.5	PASS
11N20SISO	Ant1	2412	15.210	0.5	PASS
		2437	15.210	0.5	PASS
		2462	15.210	0.5	PASS



### Test Graphs

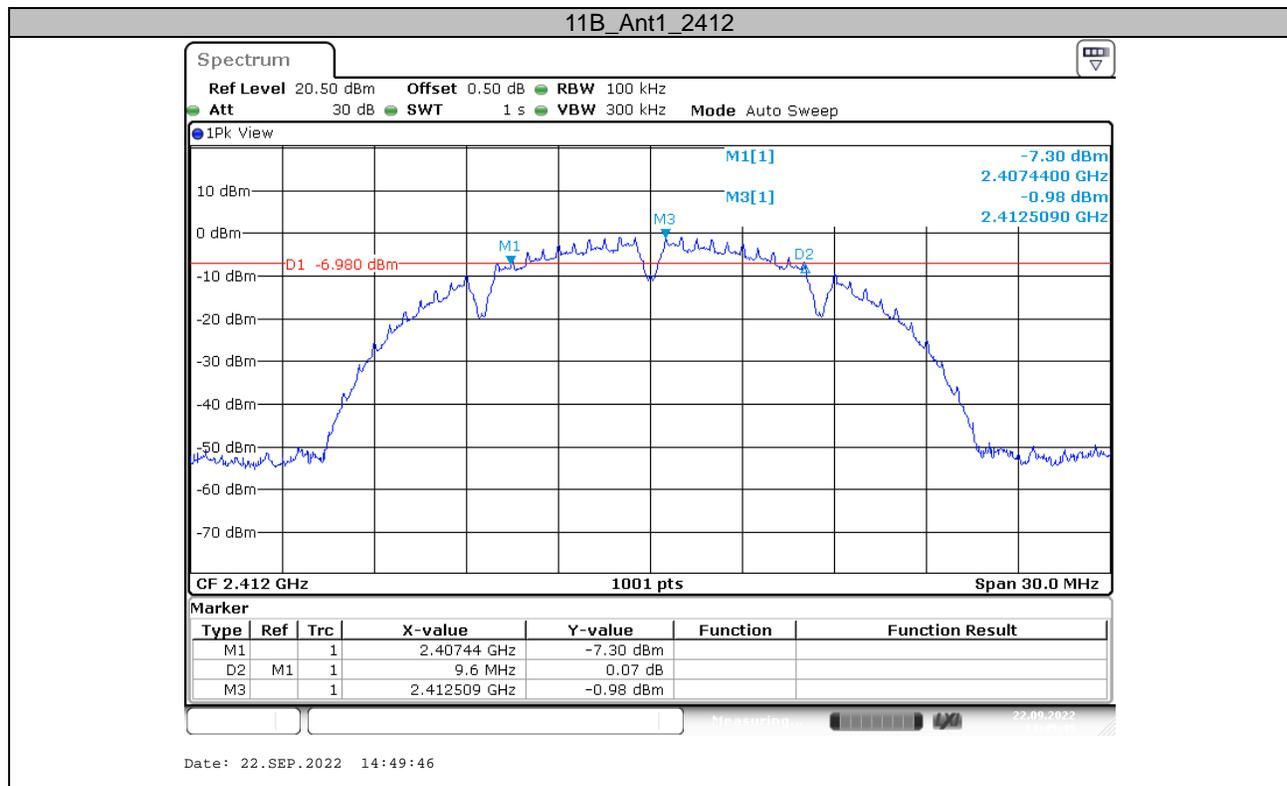

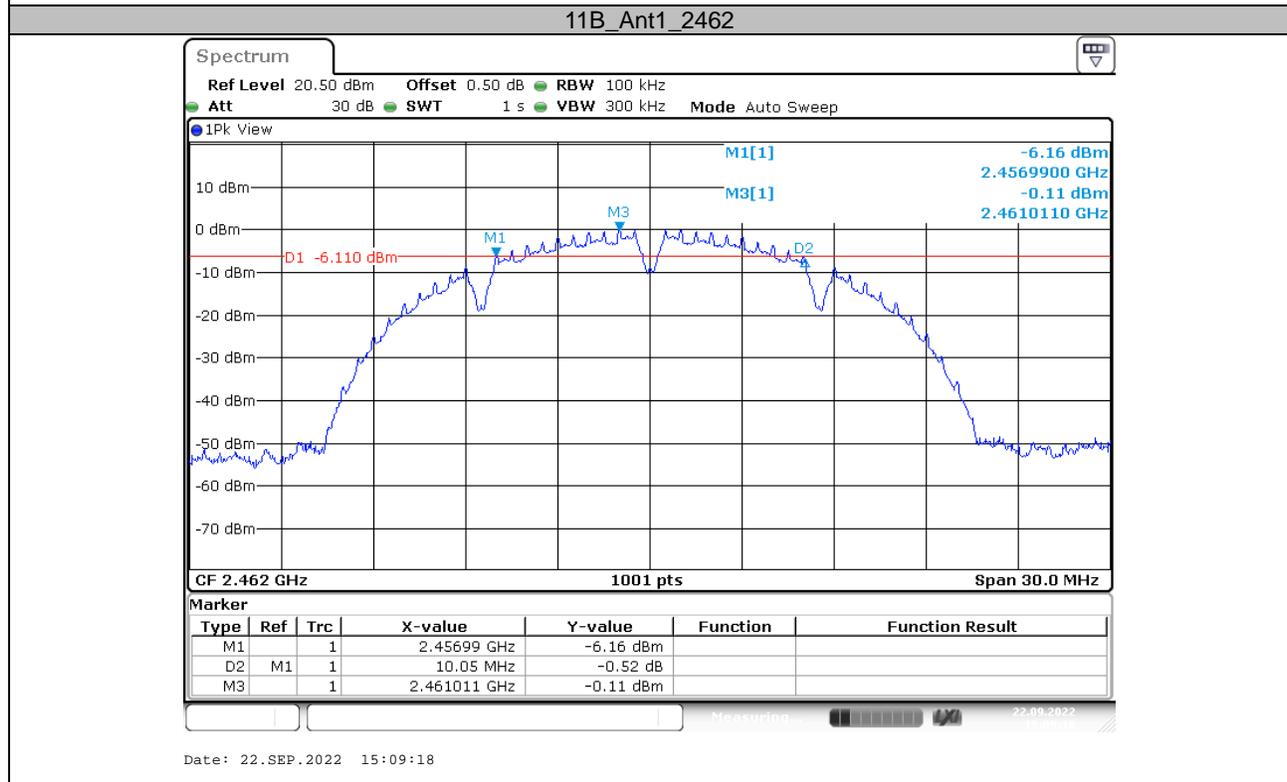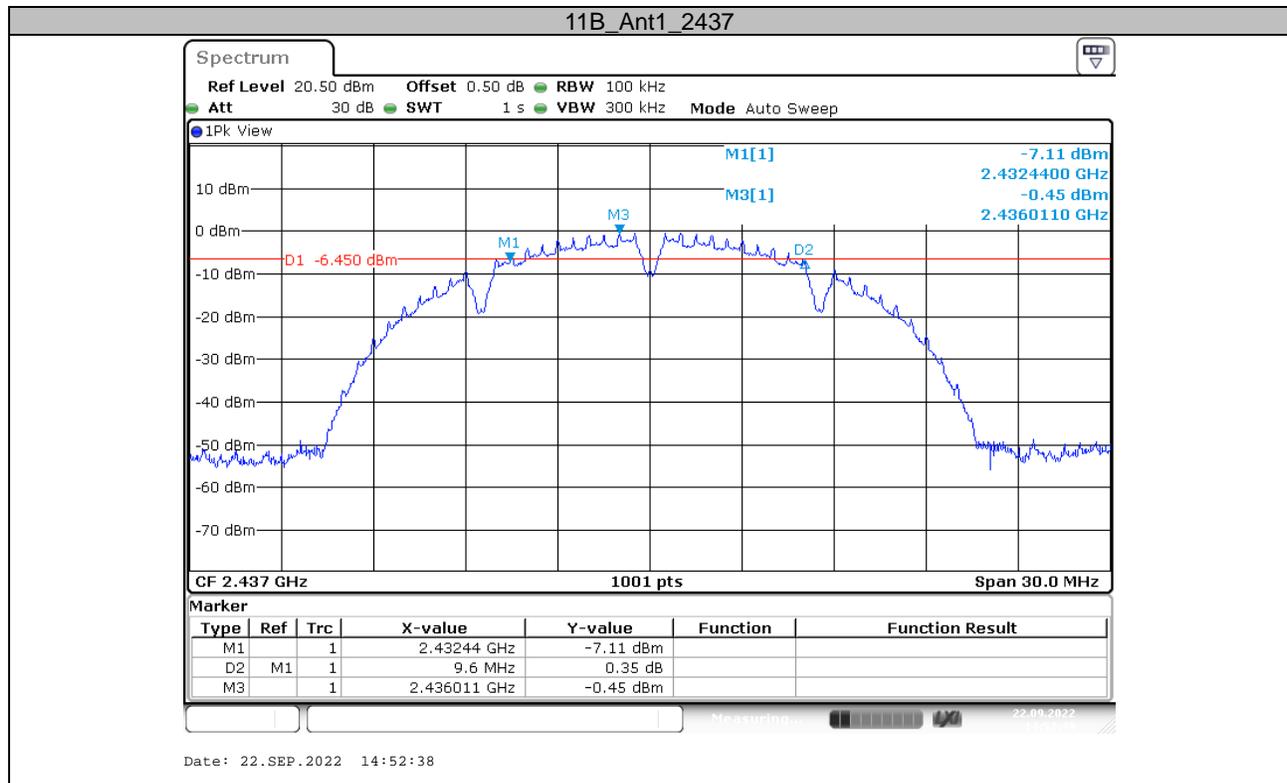

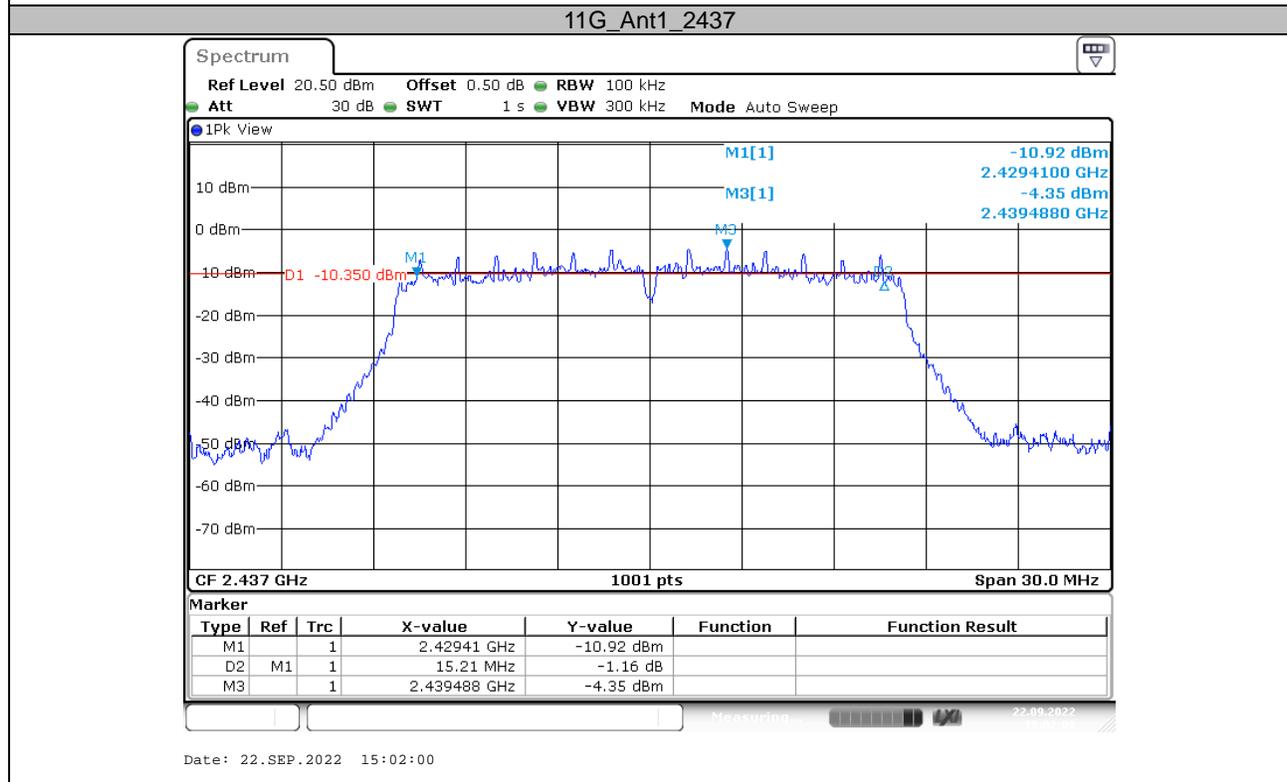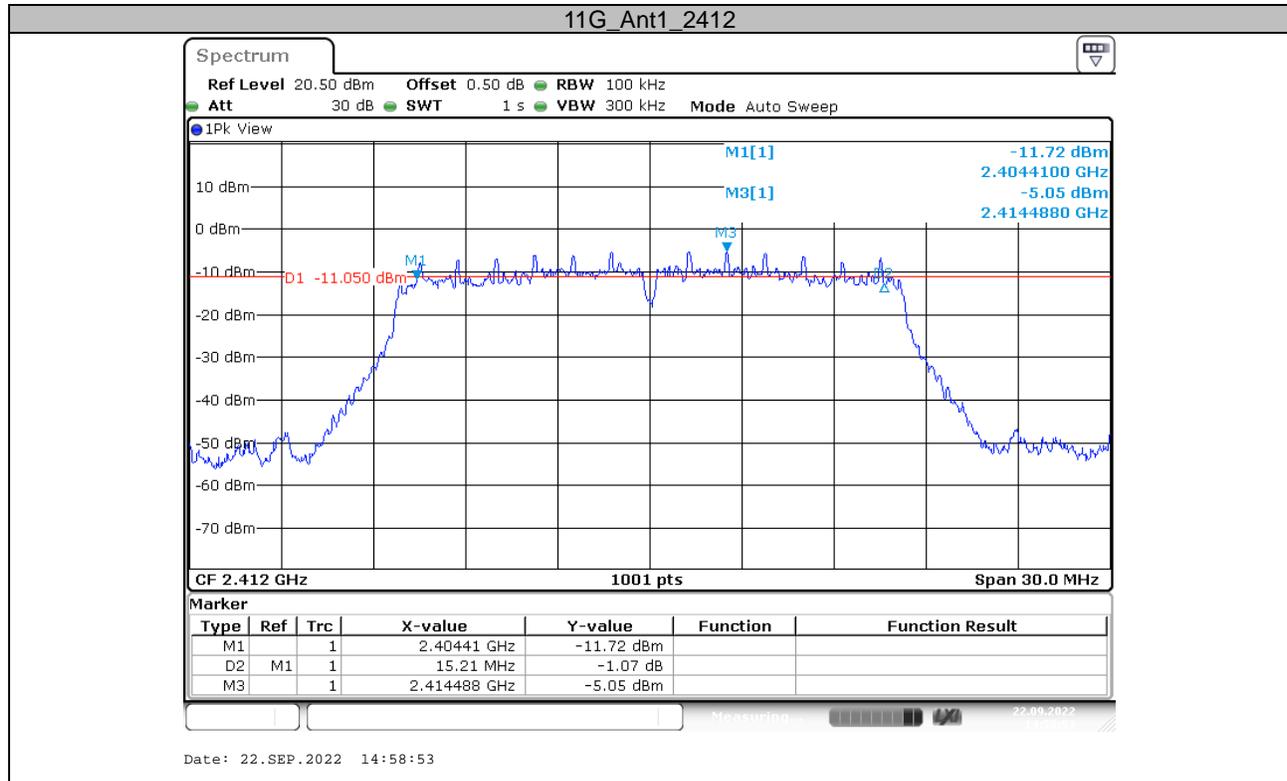

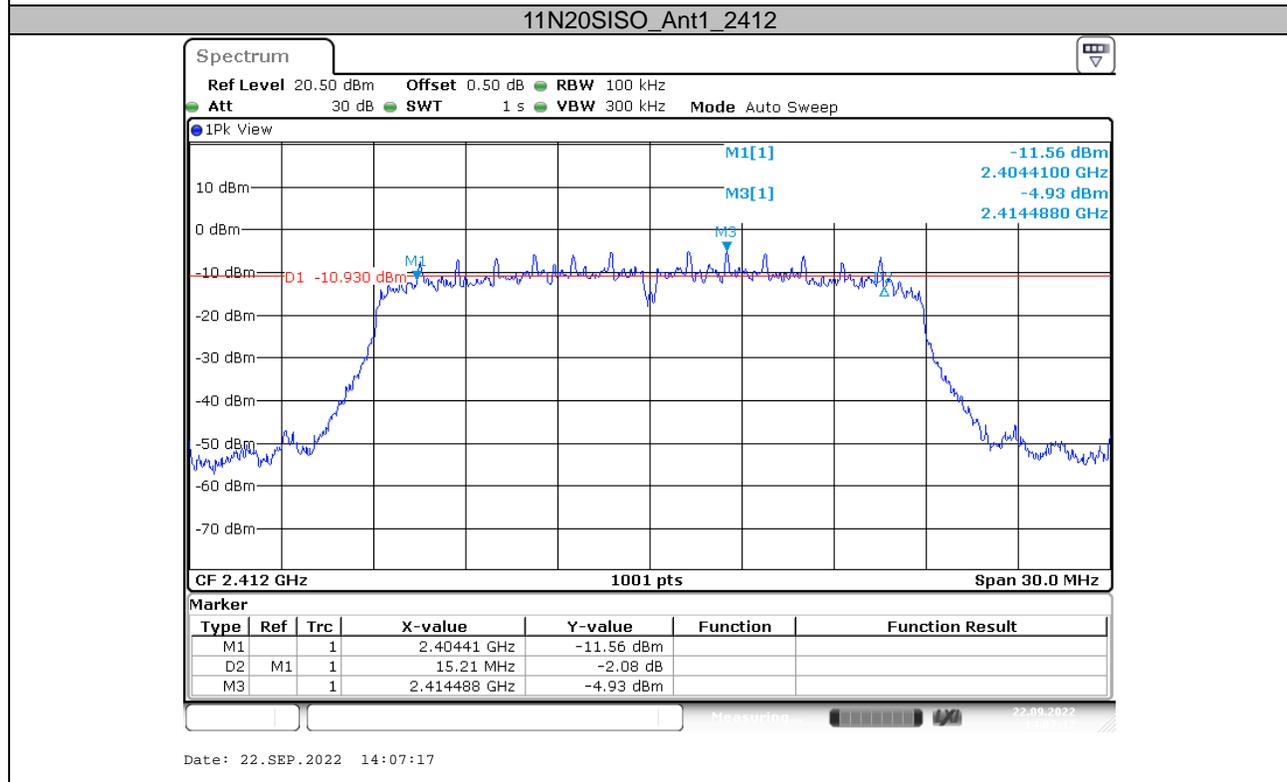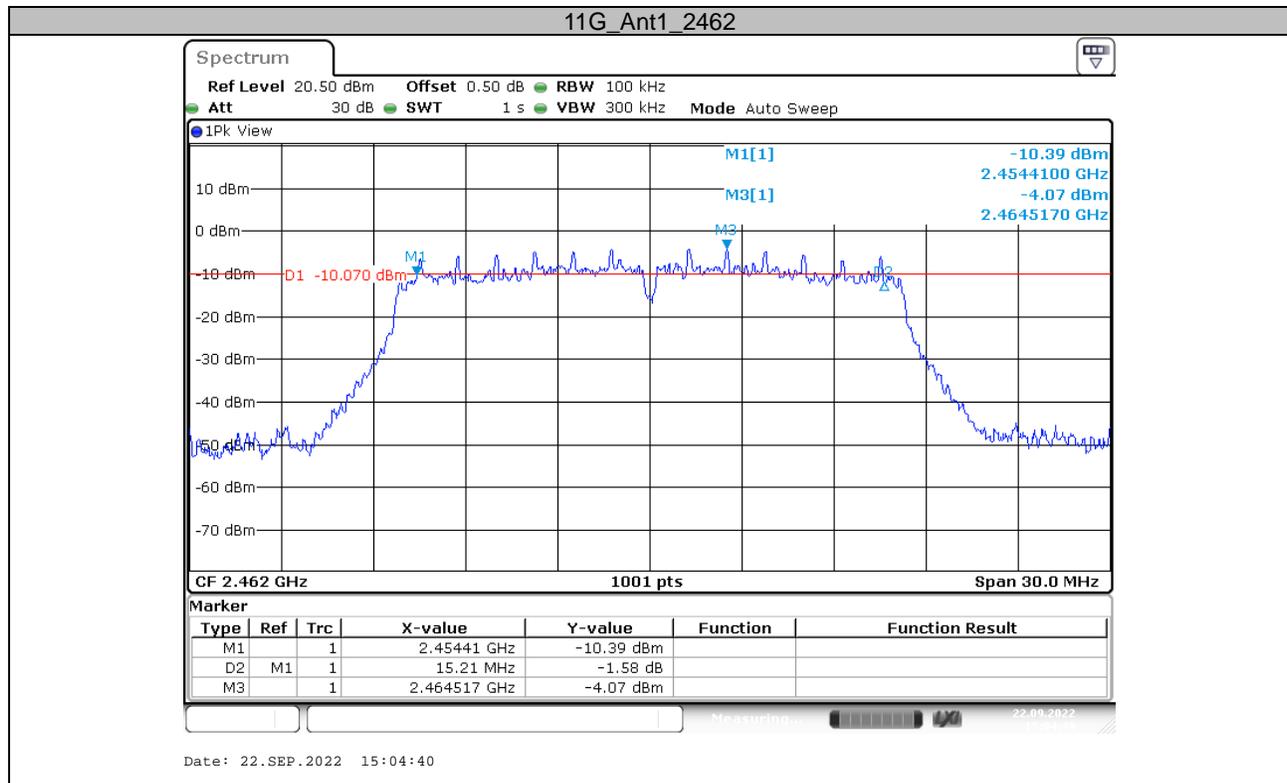

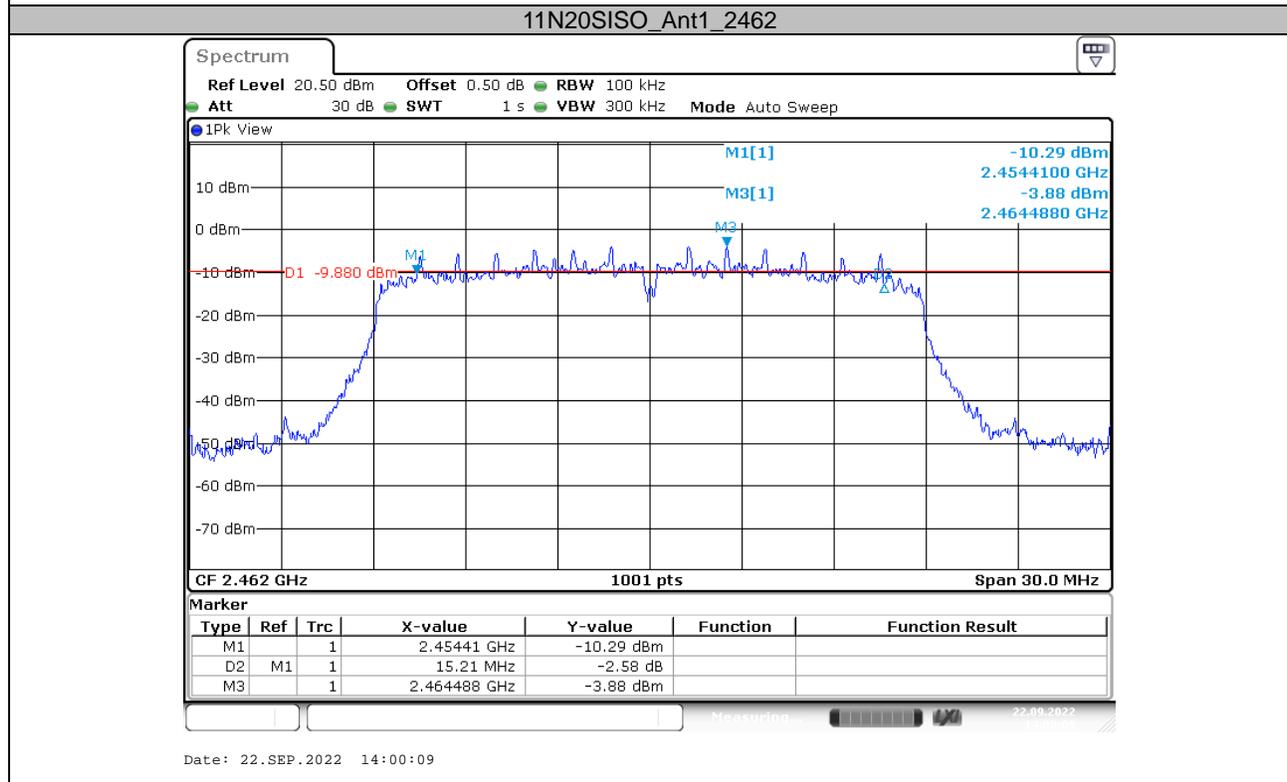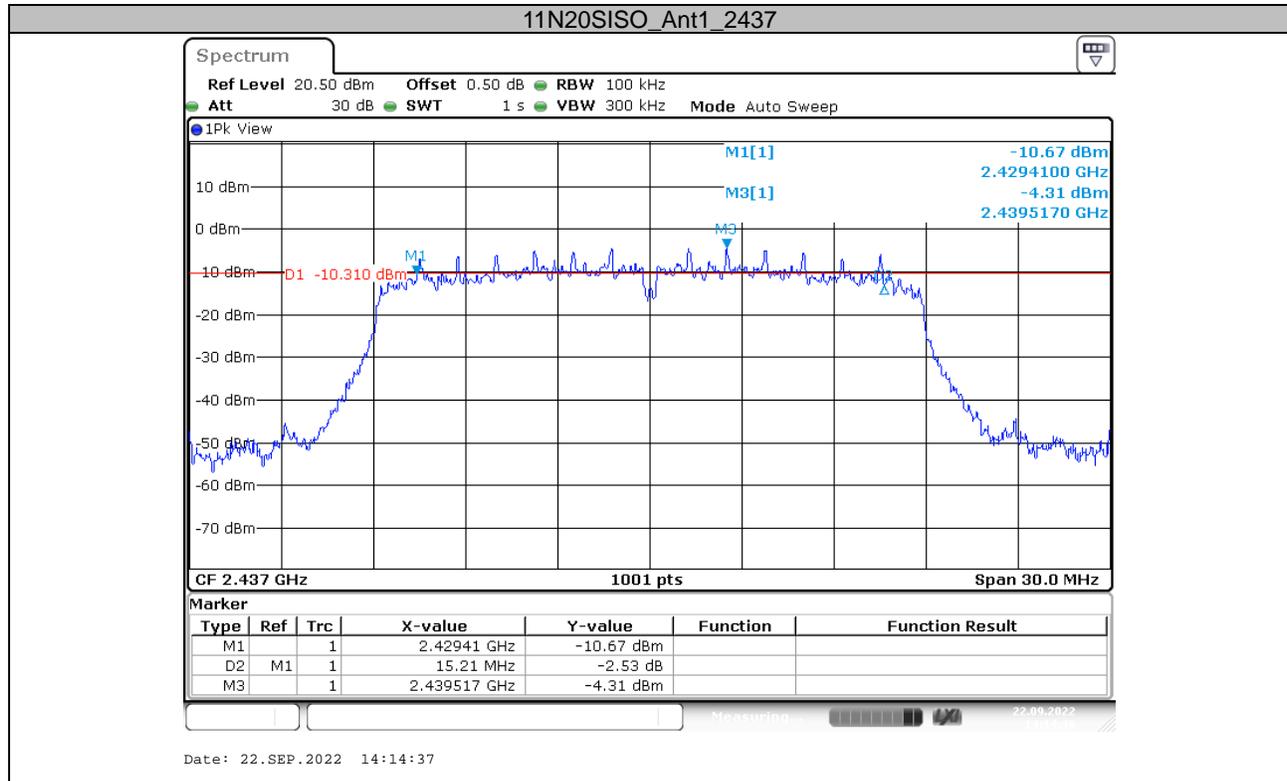




## APPENDIX B: Occupied Channel Bandwidth

### Test Result:


TestMode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11 B	Ant1	2412	14.226	---	PASS
		2437	14.226	---	PASS
		2462	14.186	---	PASS
11G	Ant1	2412	16.424	---	PASS
		2437	16.424	---	PASS
		2462	16.424	---	PASS
11N20SISO	Ant1	2412	17.343	---	PASS
		2437	17.343	---	PASS
		2462	17.303	---	PASS

### Test Graphs:

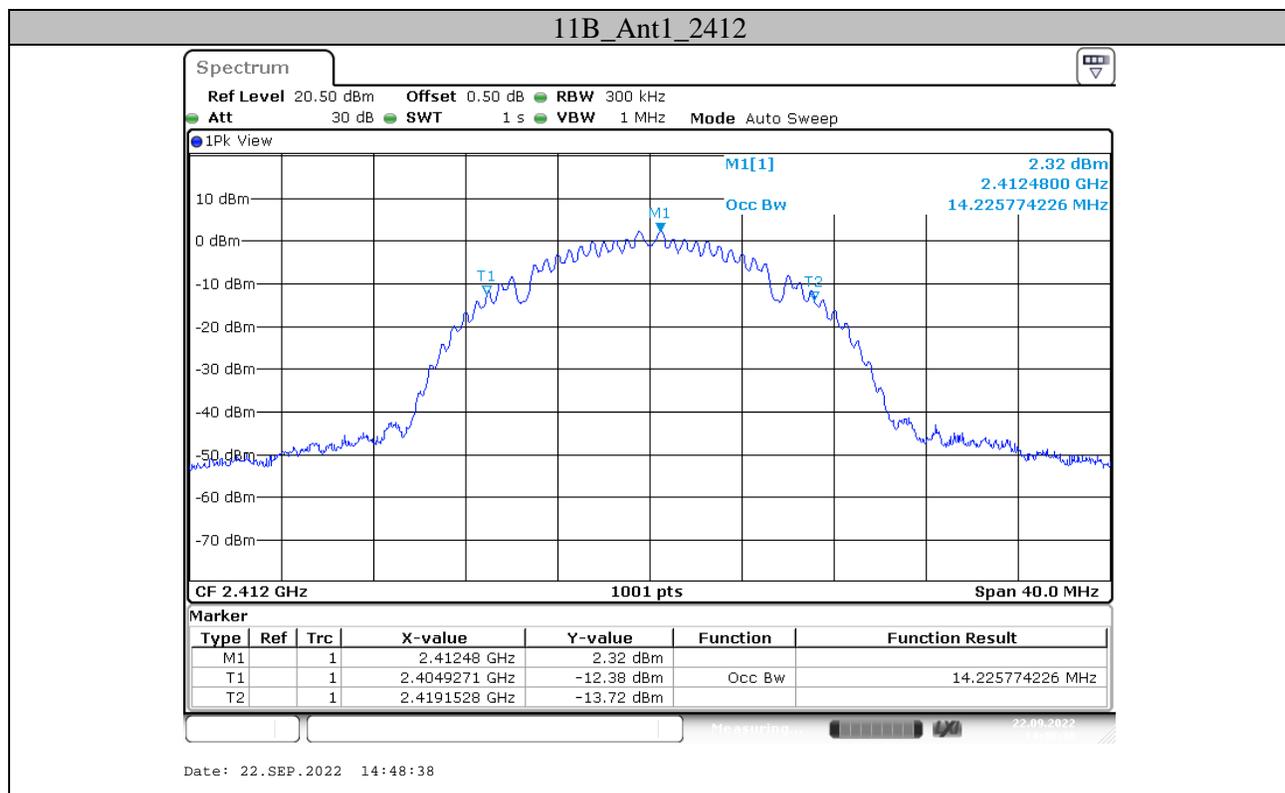

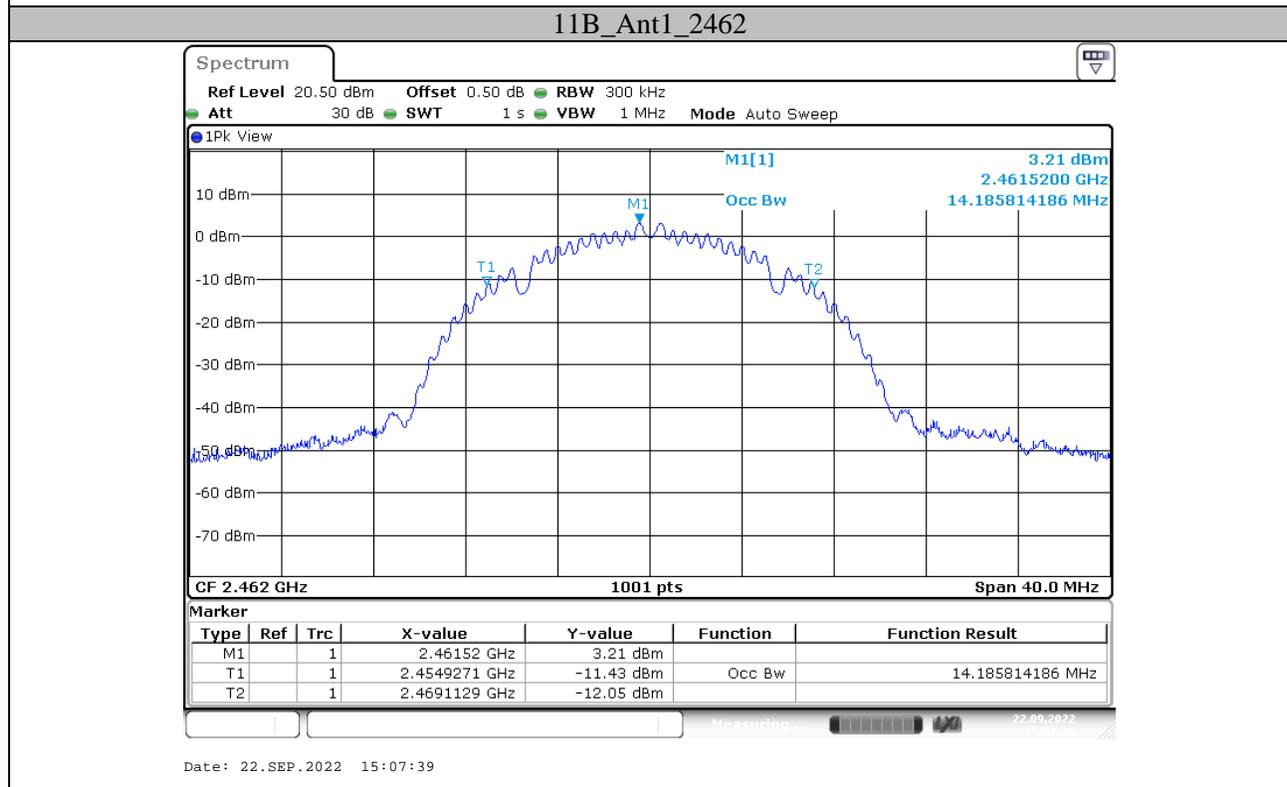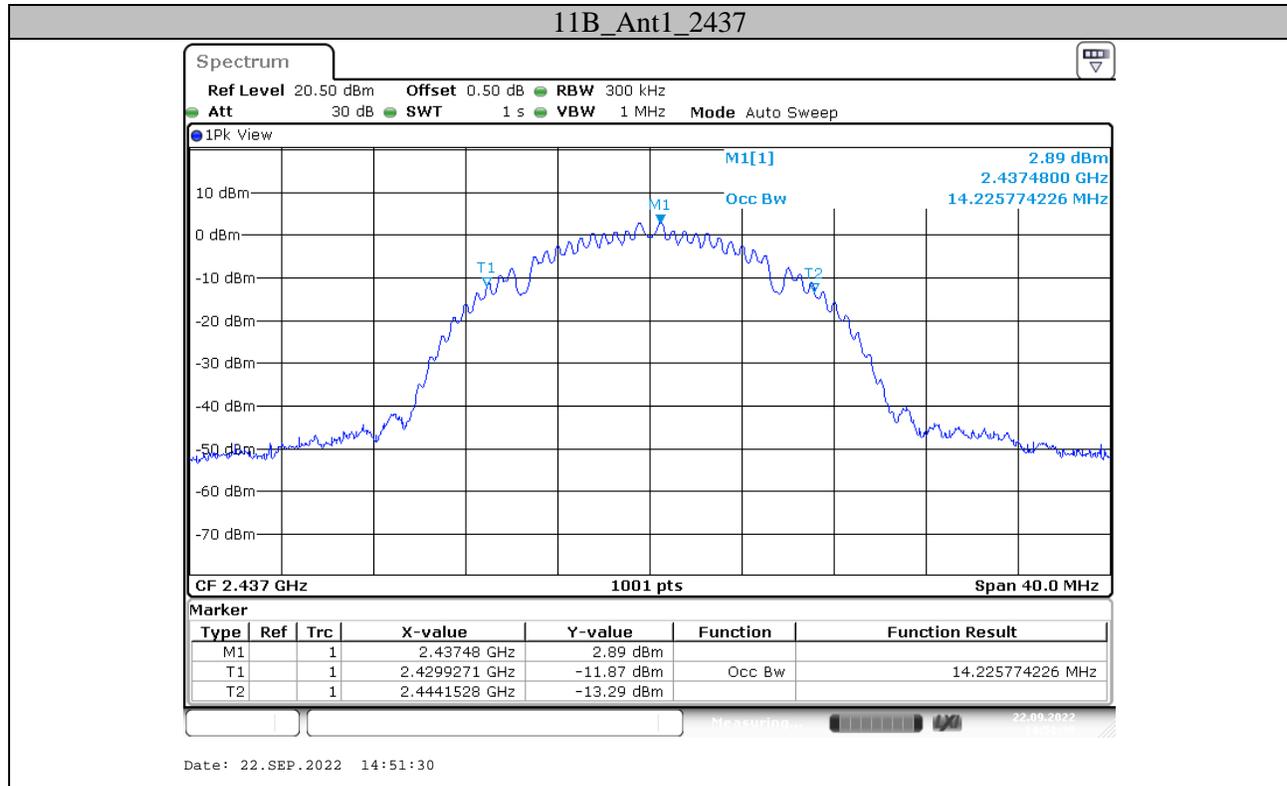


11G\_Ant1\_2412

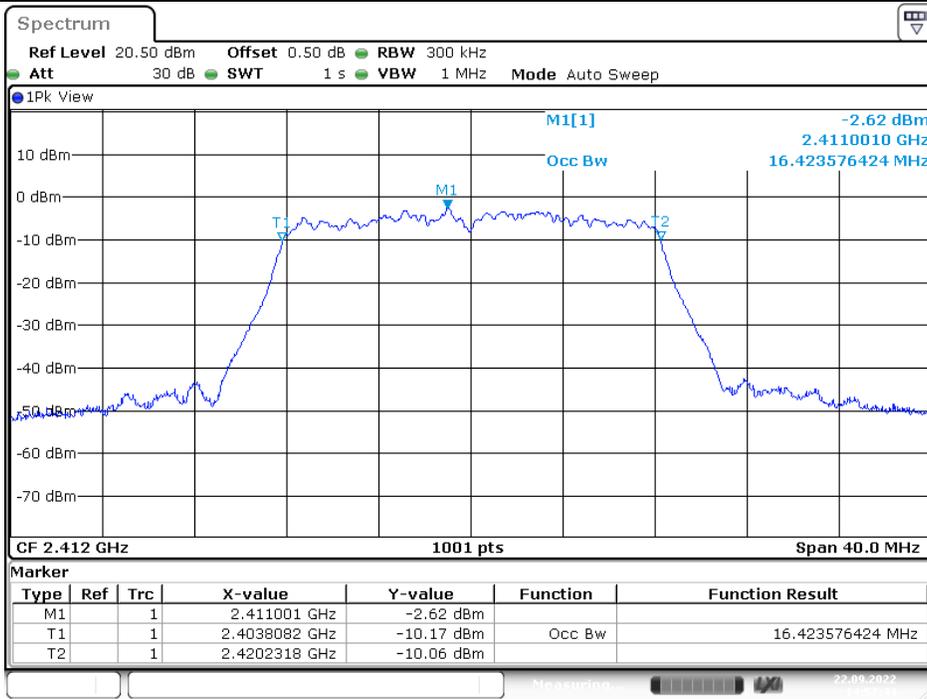


Date: 22.SEP.2022 14:57:44

11G\_Ant1\_2437

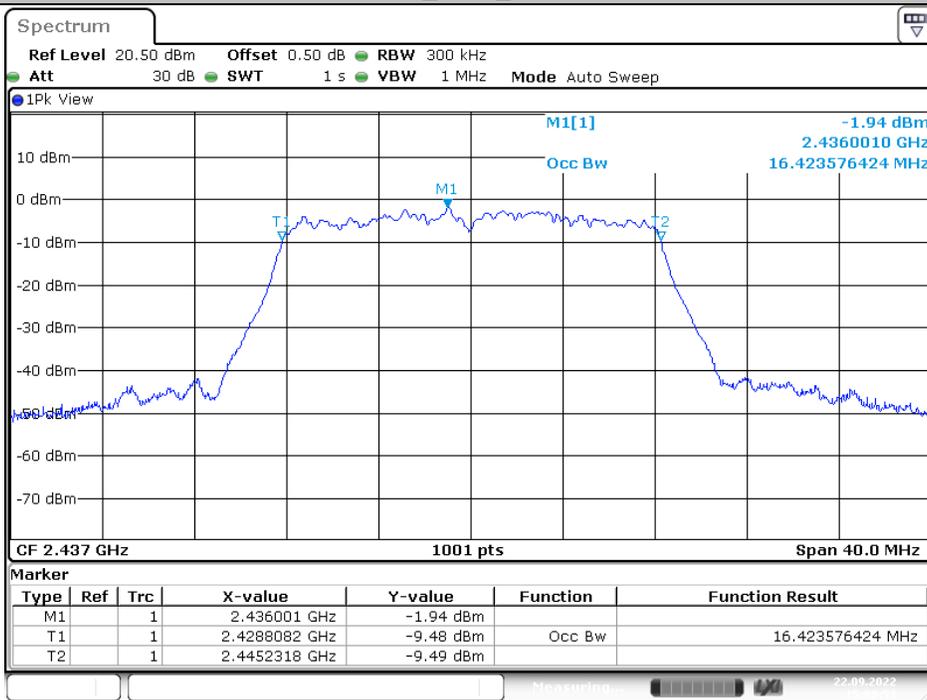




Date: 22.SEP.2022 15:00:52

11G\_Ant1\_2462

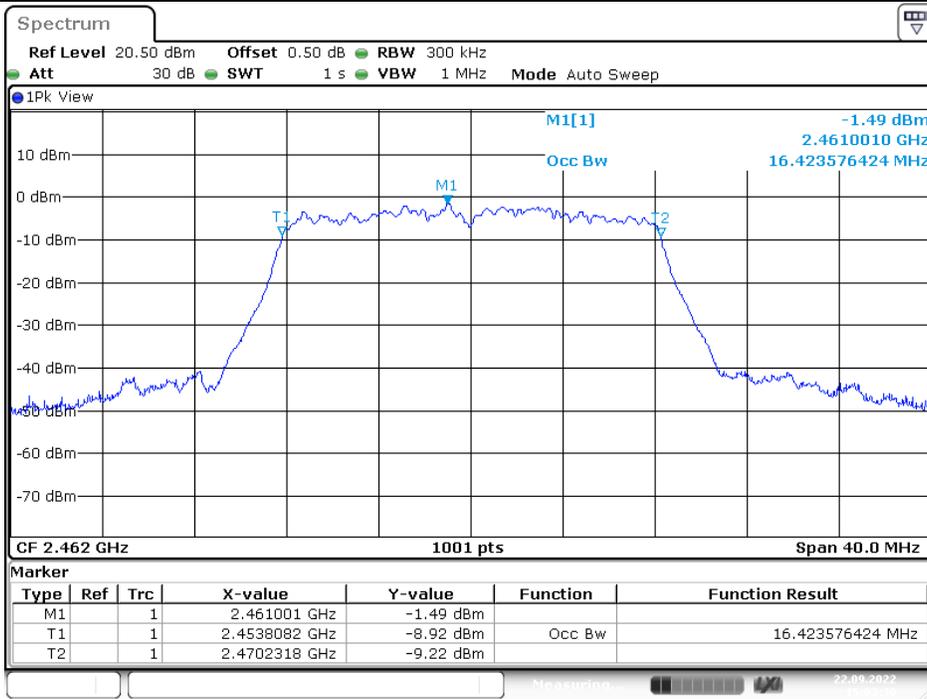

11N20SISO\_Ant1\_2412

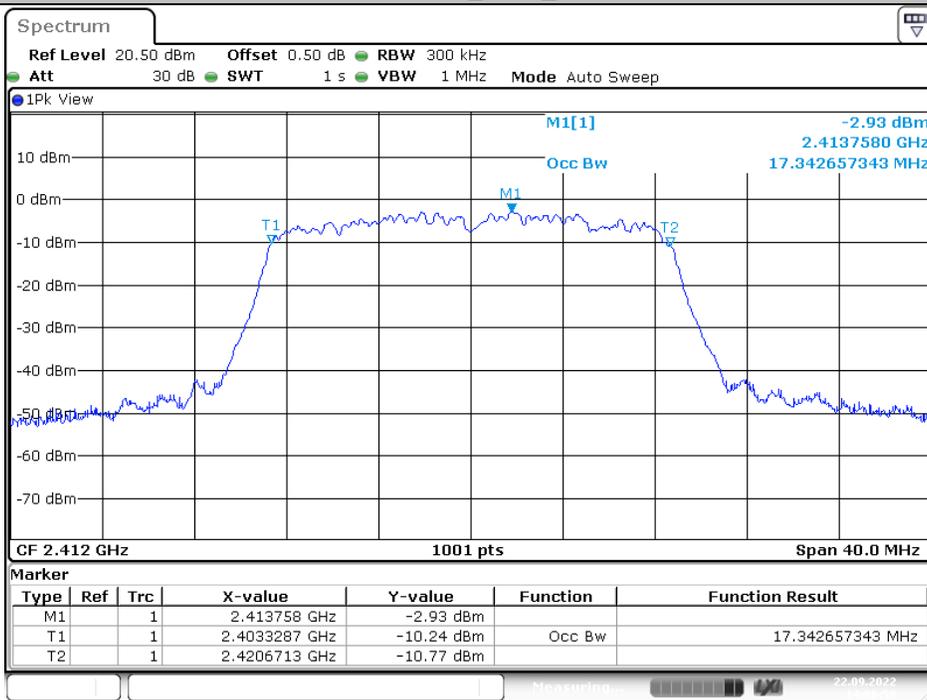

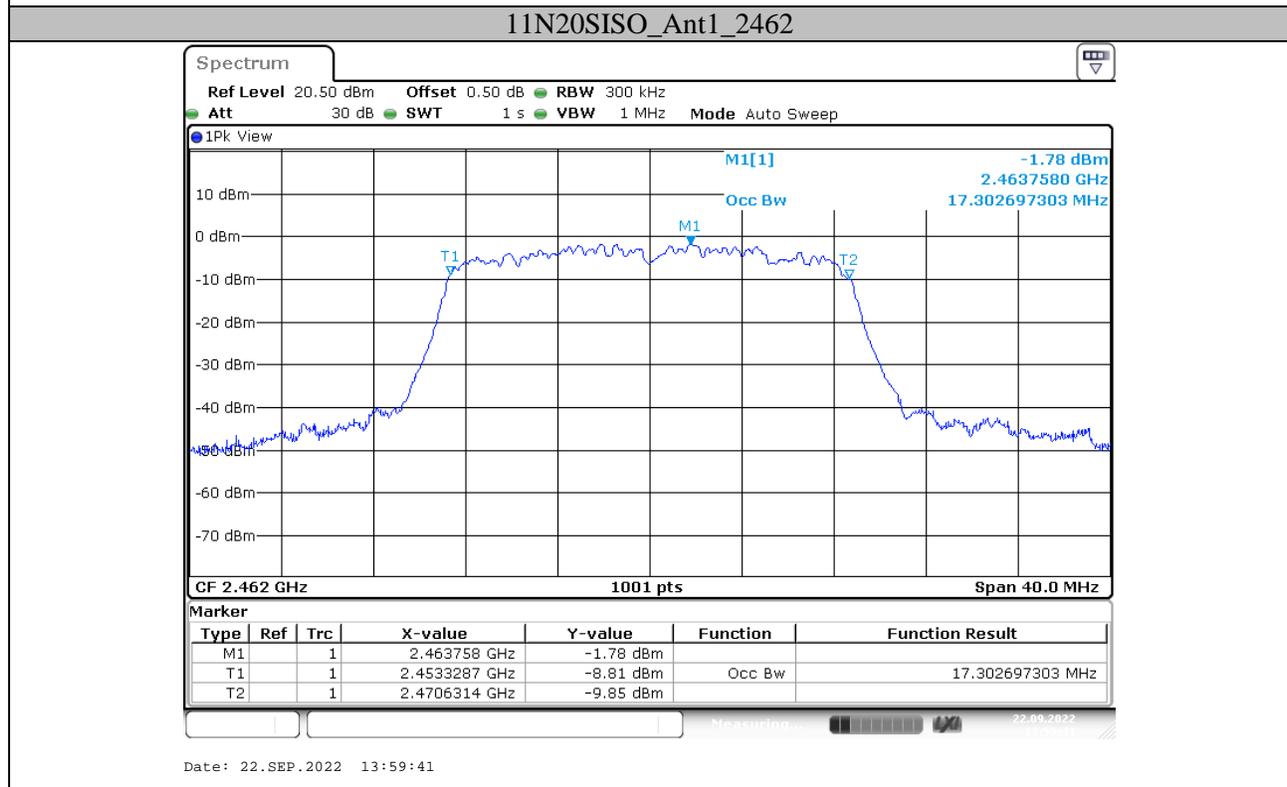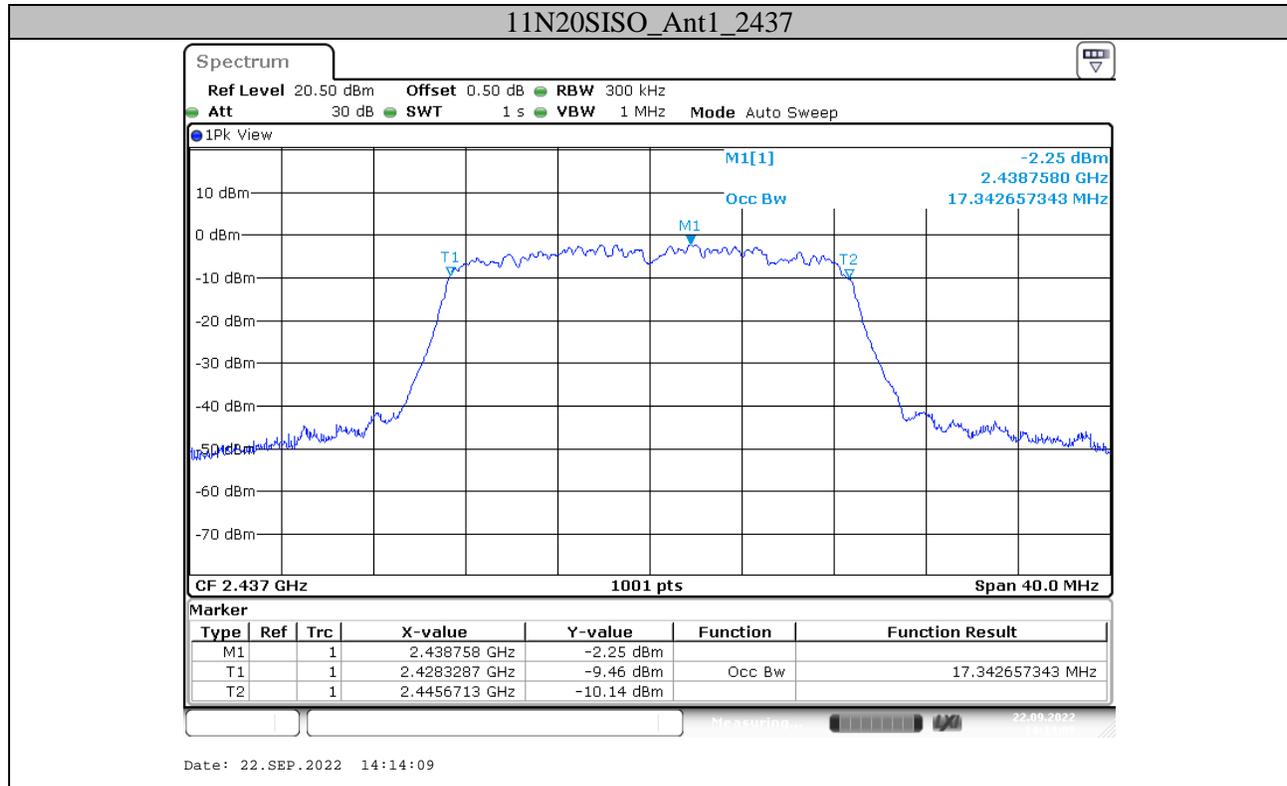

## APPENDIX C: Maximum conducted output power

### Test Result (PK)


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	9.38	<=30	PASS
		2437	9.87	<=30	PASS
		2462	10.41	<=30	PASS
11G	Ant1	2412	13.14	<=30	PASS
		2437	13.88	<=30	PASS
		2462	<b>14.24</b>	<=30	PASS
11N20SISO	Ant1	2412	13.29	<=30	PASS
		2437	13.91	<=30	PASS
		2462	14.17	<=30	PASS



### Test Result (AV)



TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	6.97	<=30	PASS
		2437	7.41	<=30	PASS
		2462	7.93	<=30	PASS
11G	Ant1	2412	5.94	<=30	PASS
		2437	6.55	<=30	PASS
		2462	7.14	<=30	PASS
11N20SISO	Ant1	2412	5.82	<=30	PASS
		2437	6.6	<=30	PASS
		2462	6.97	<=30	PASS


## APPENDIX D: Band edge measurements

### Test Graphs

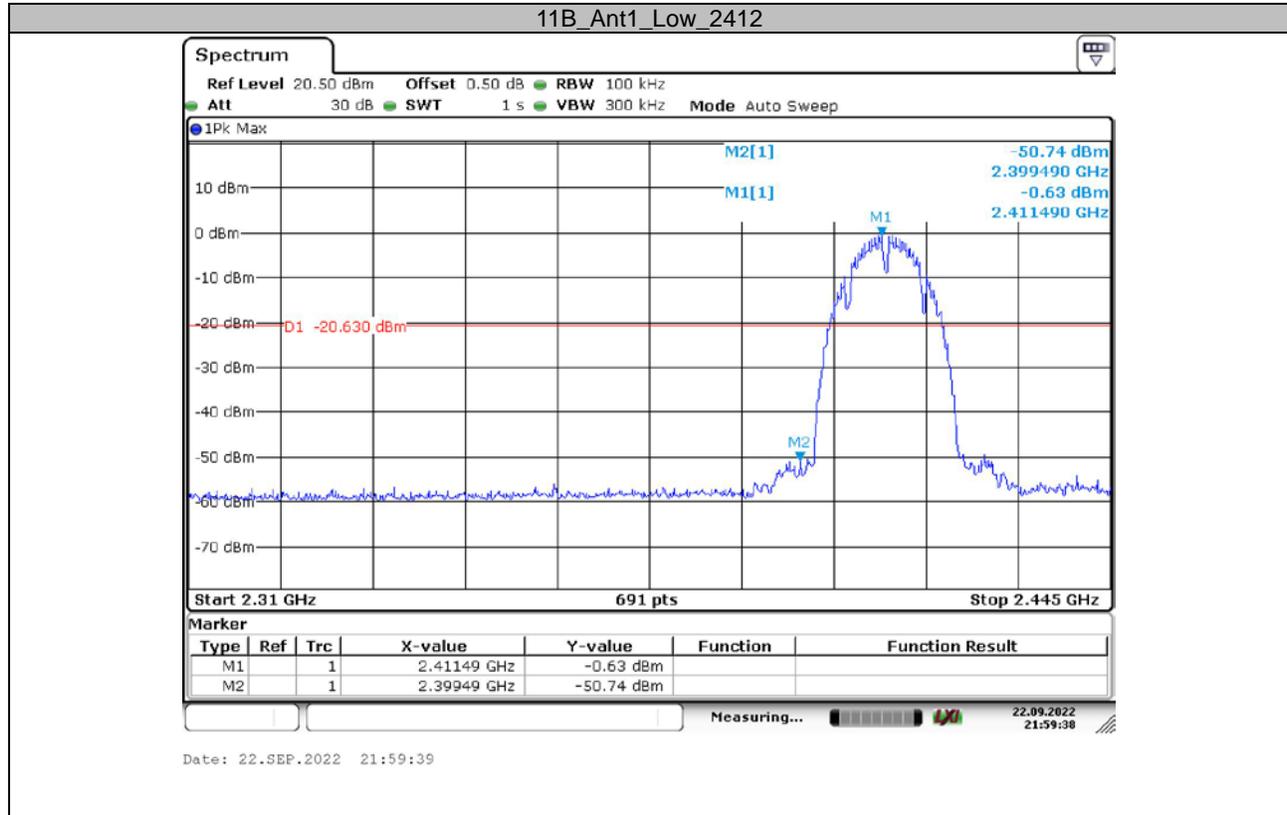

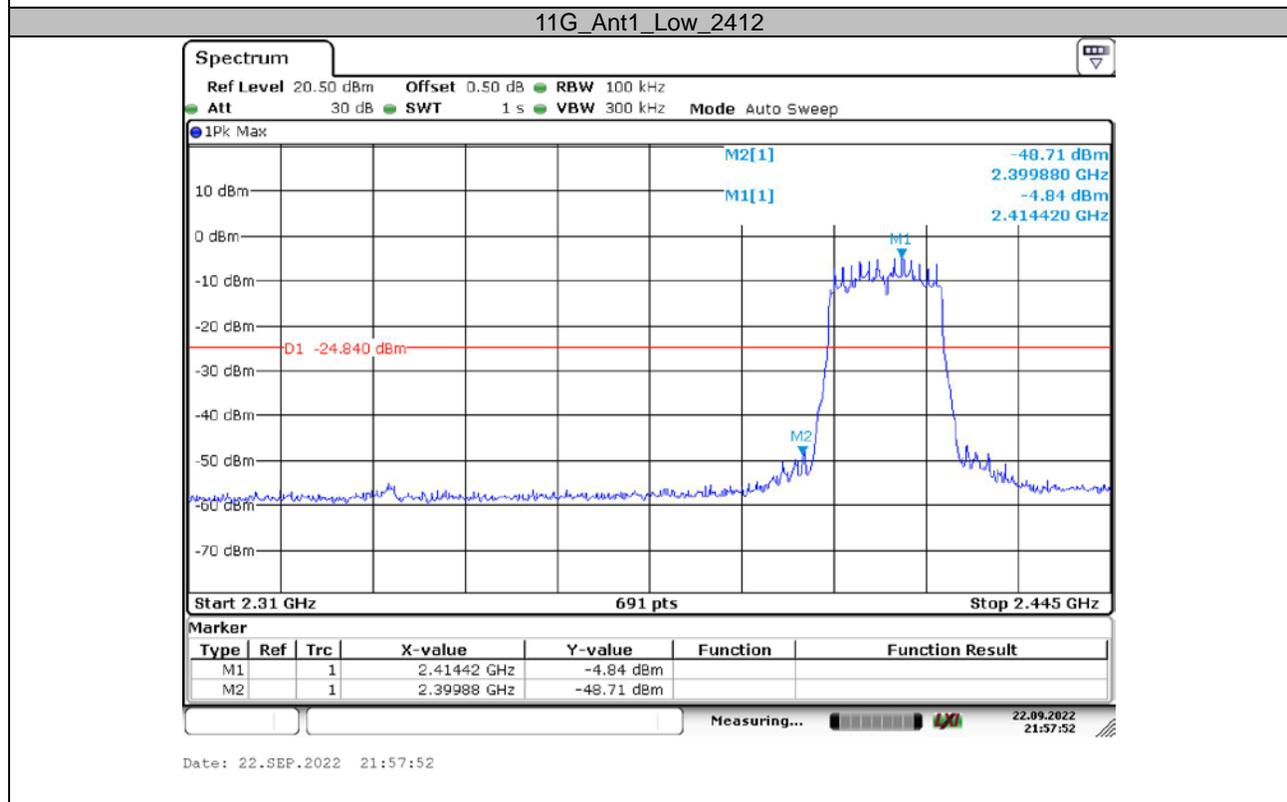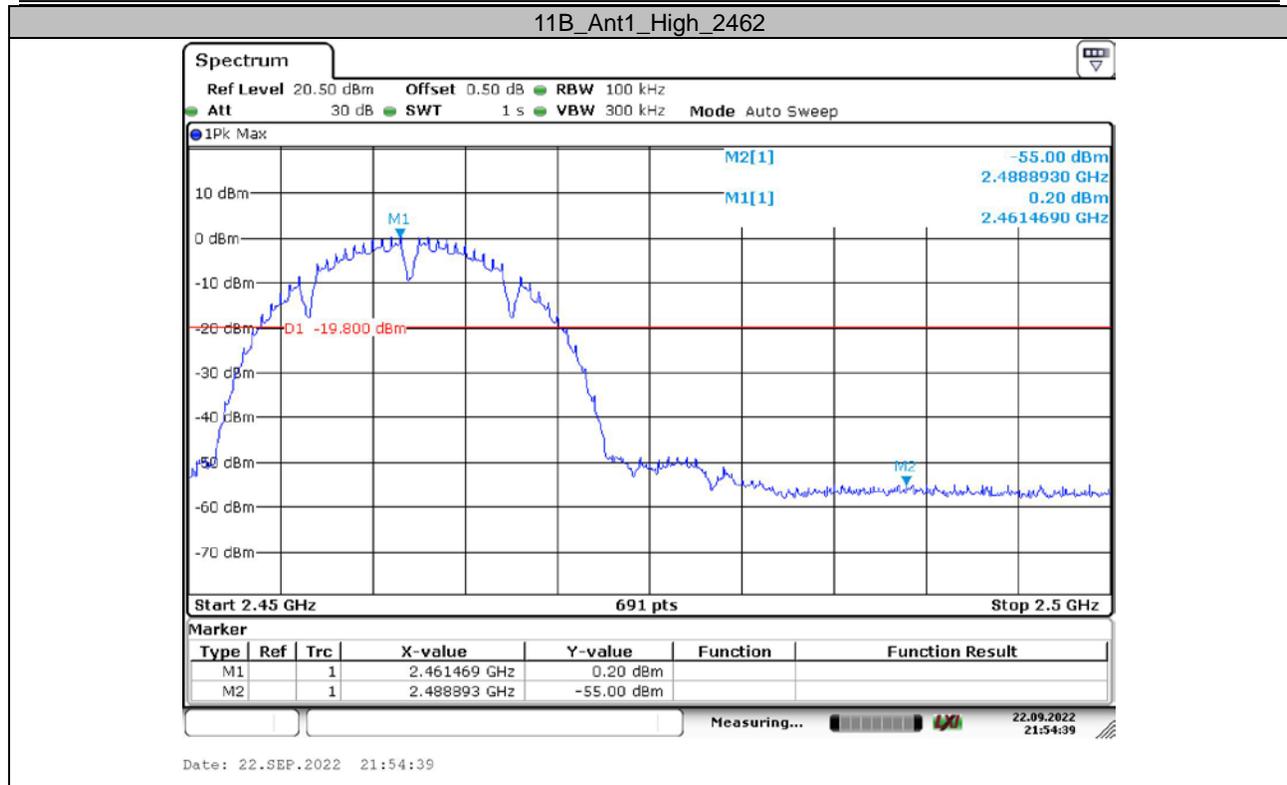

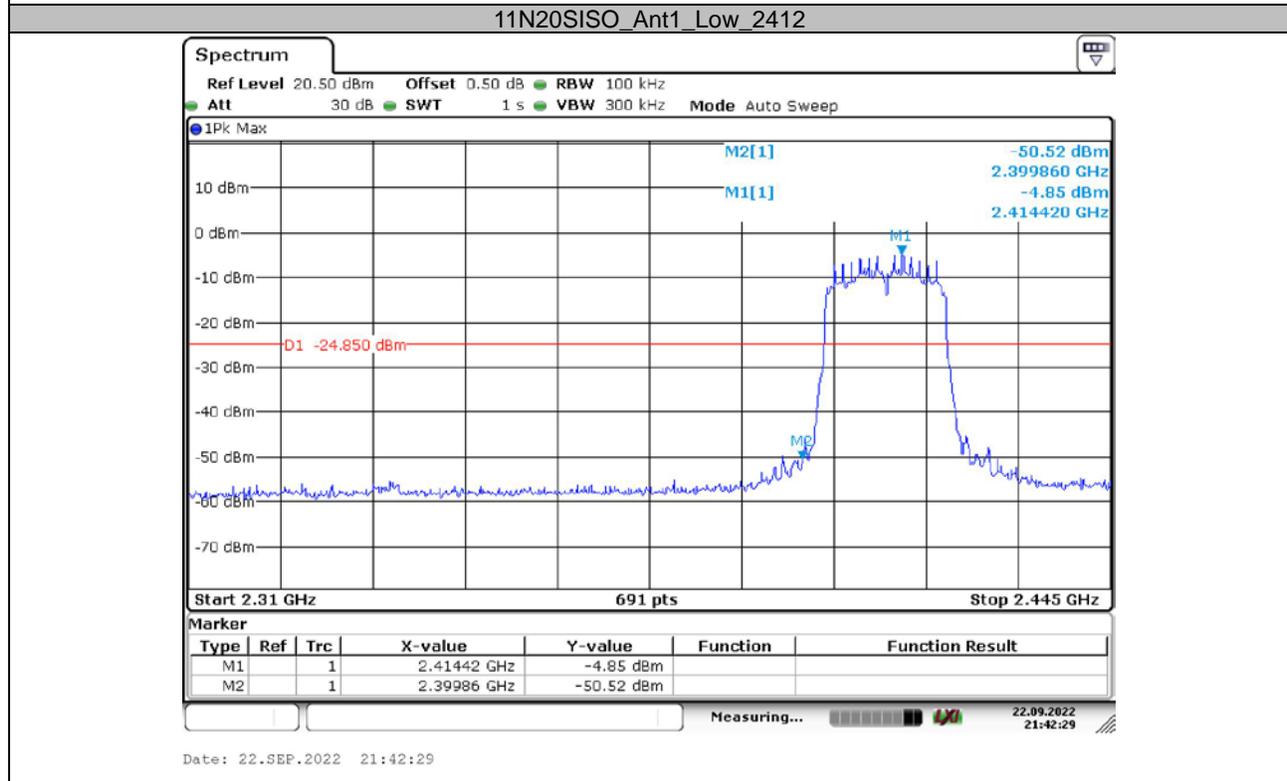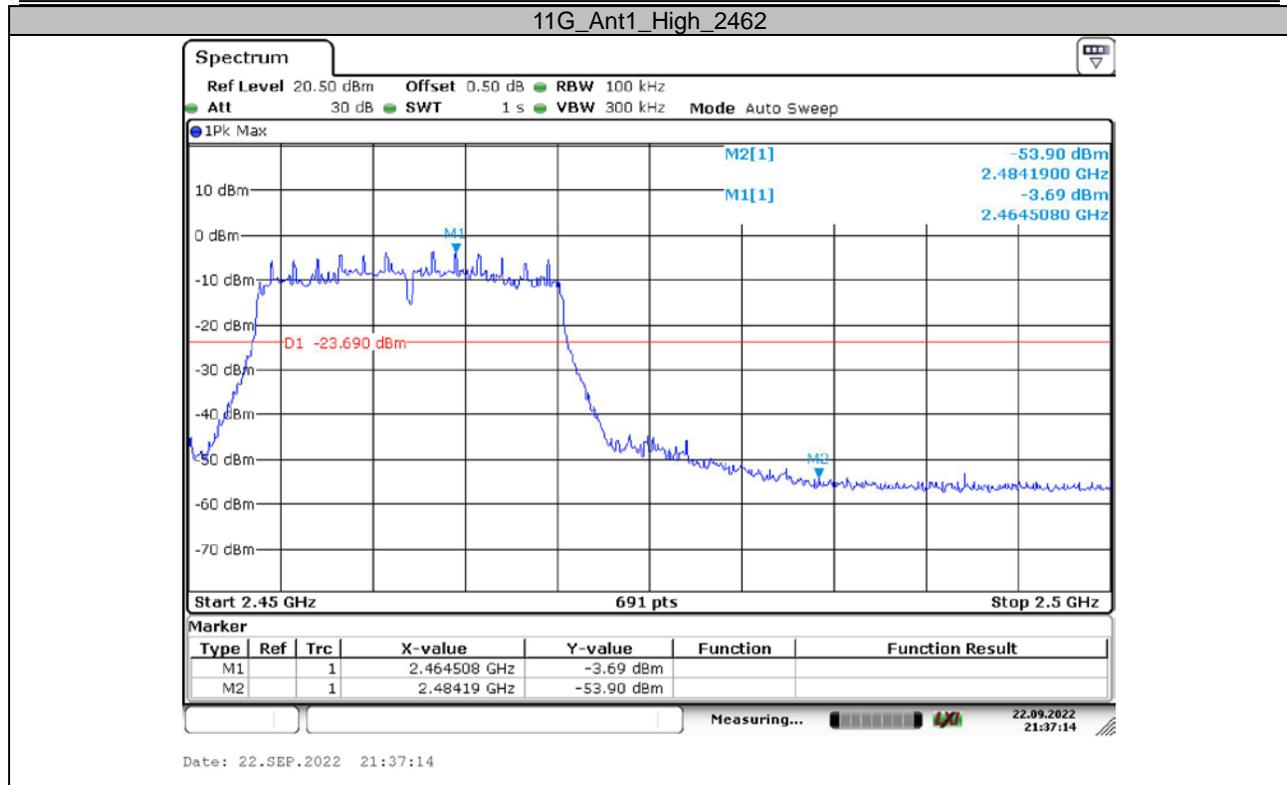

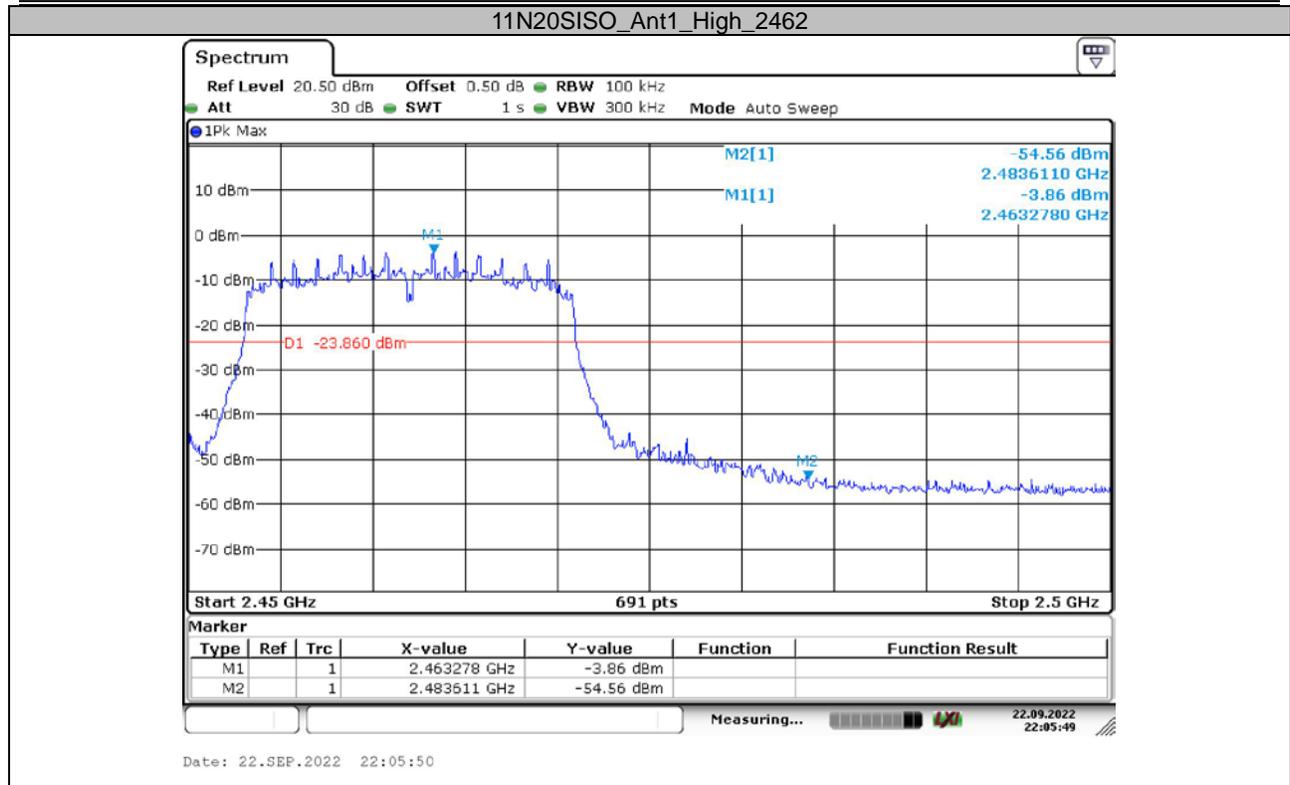




## APPENDIX E: Maximum power spectral density



### Test Result



TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-13.30	<=8	PASS
		2437	-12.89	<=8	PASS
		2462	-12.57	<=8	PASS
11G	Ant1	2412	-21.53	<=8	PASS
		2437	-21.58	<=8	PASS
		2462	-20.45	<=8	PASS
11N20SISO	Ant1	2412	-22.29	<=8	PASS
		2437	-21.62	<=8	PASS
		2462	-21.22	<=8	PASS



### Test Graphs

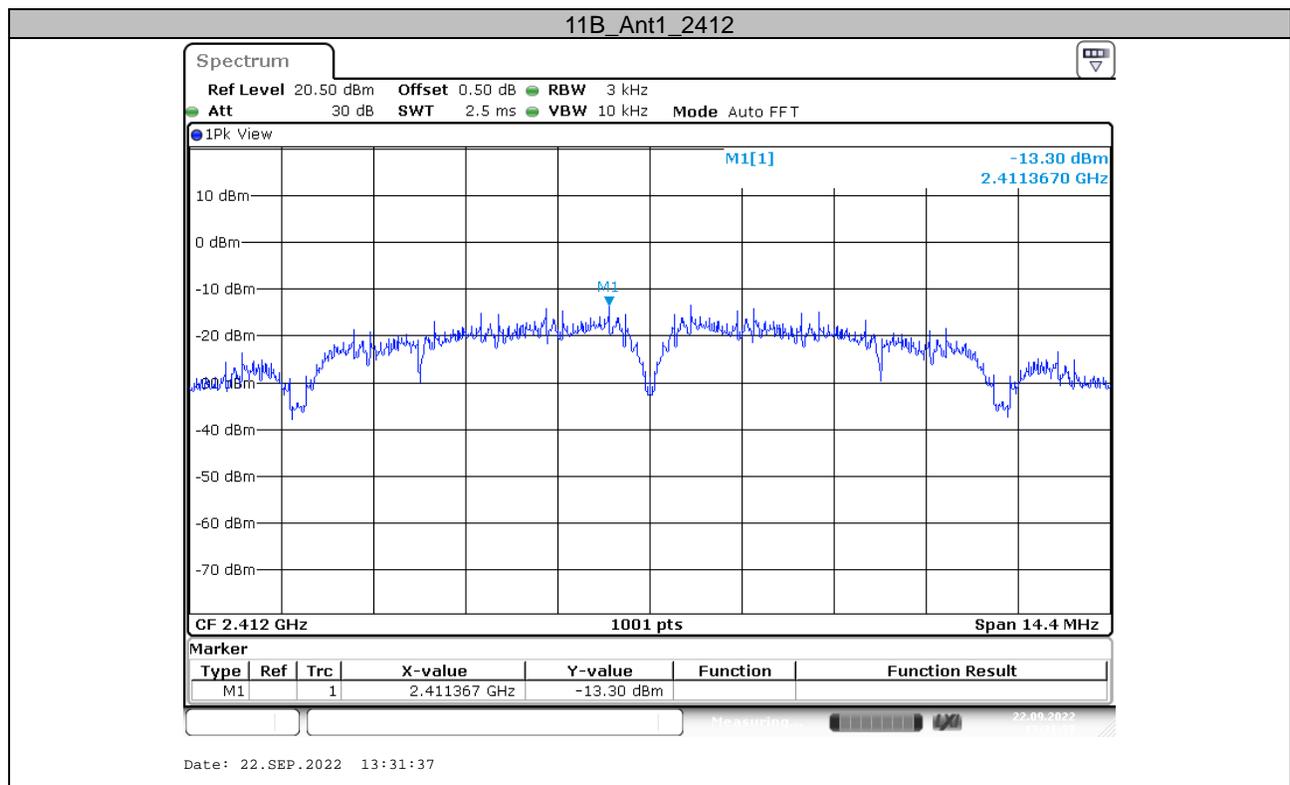

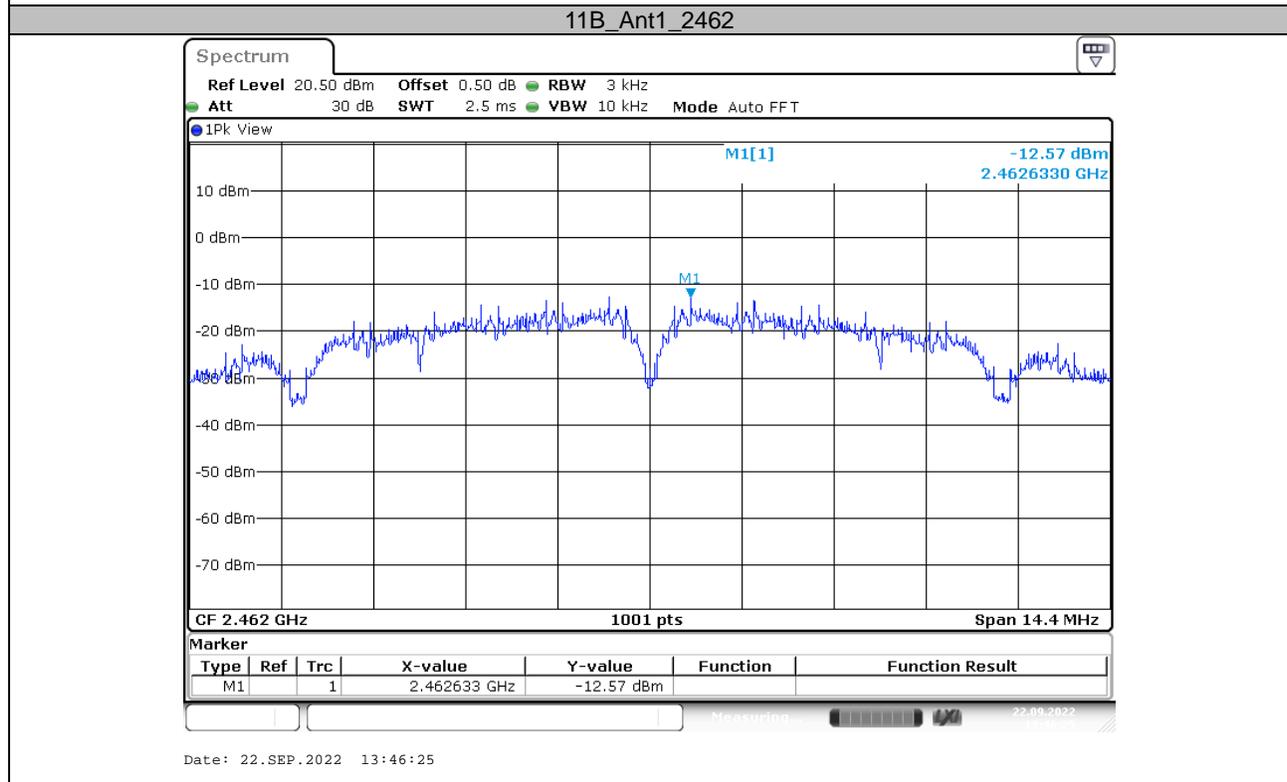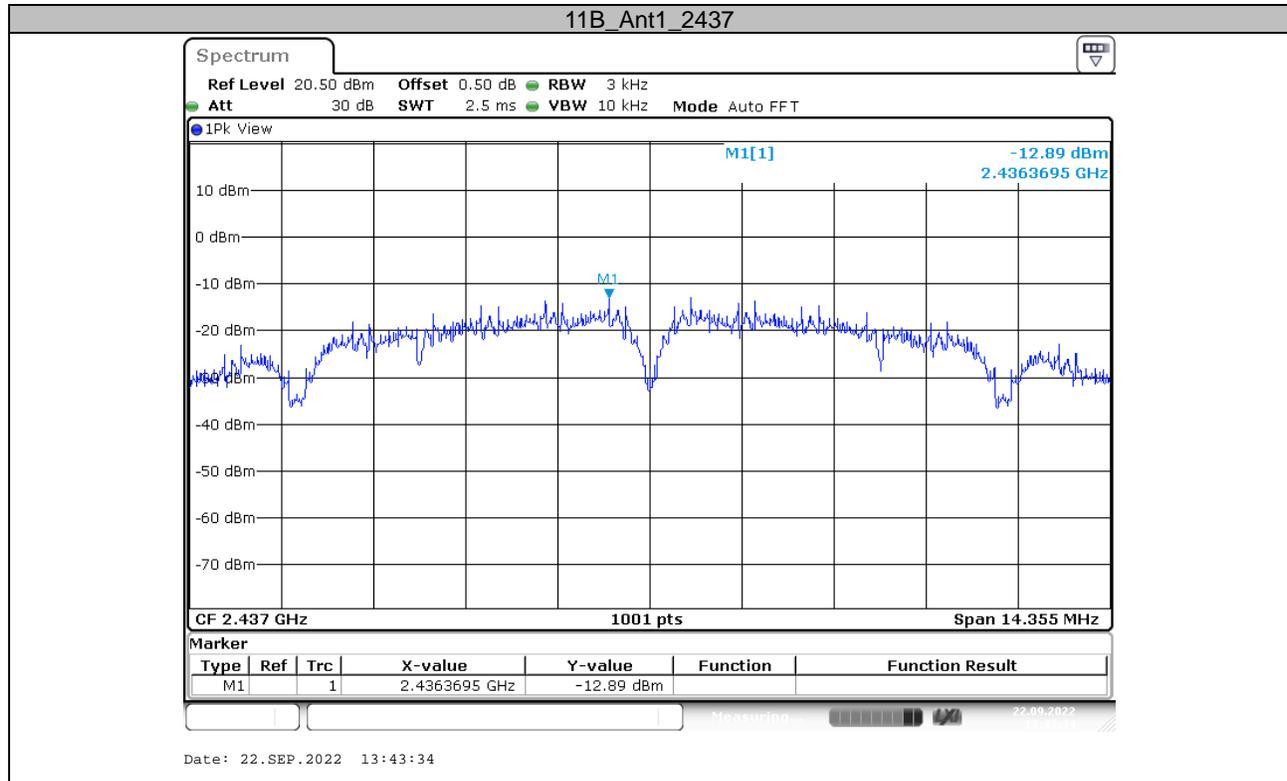

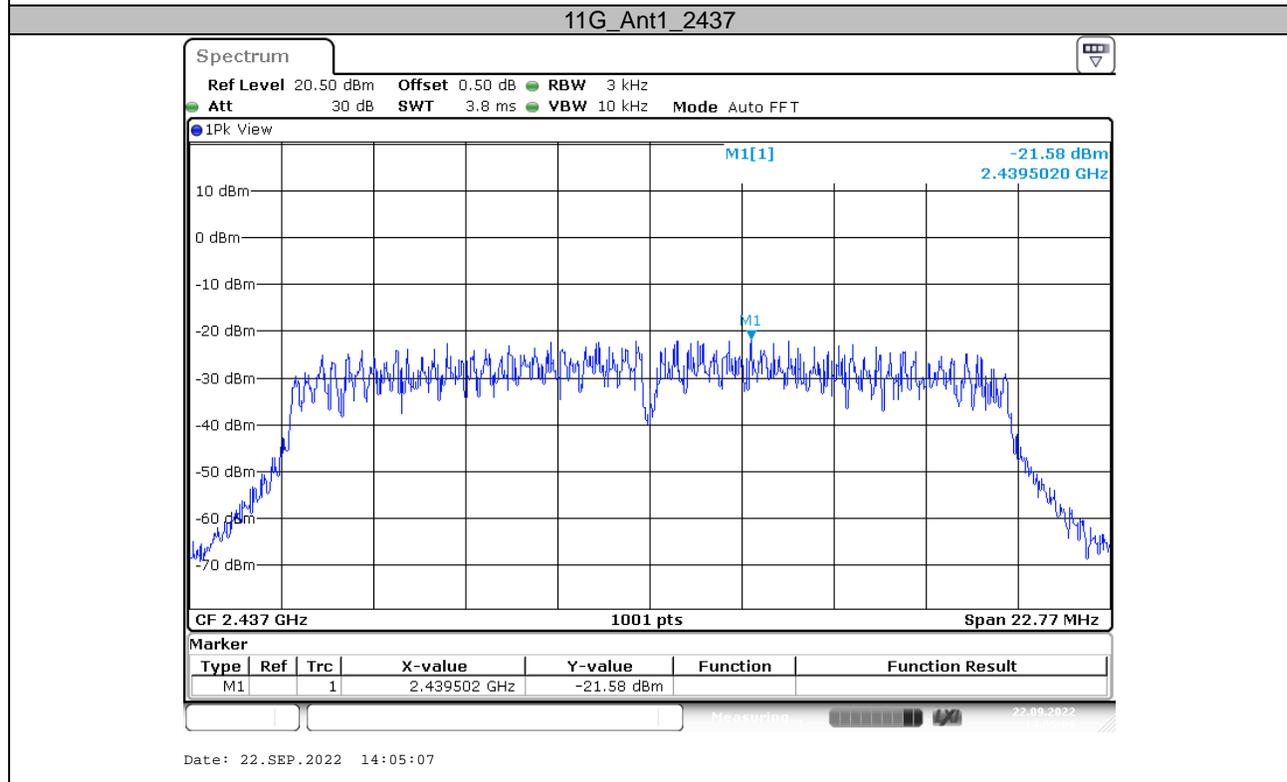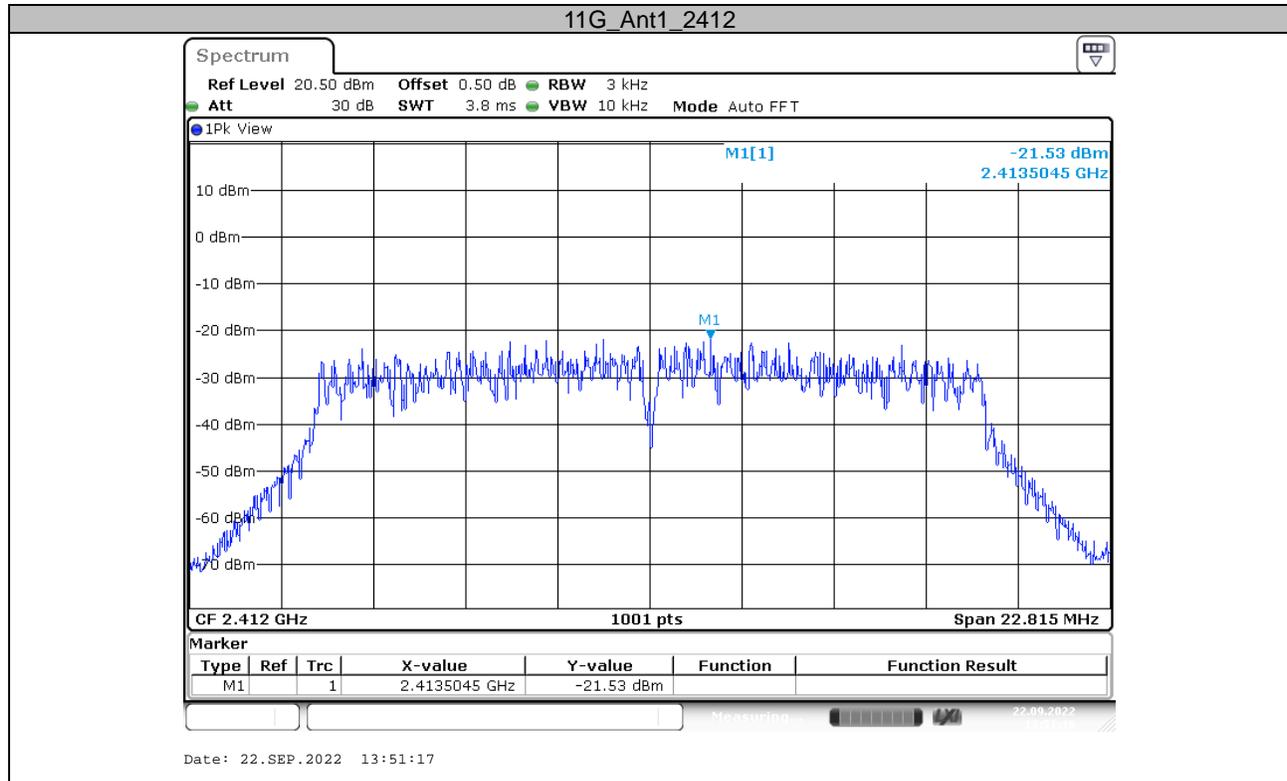

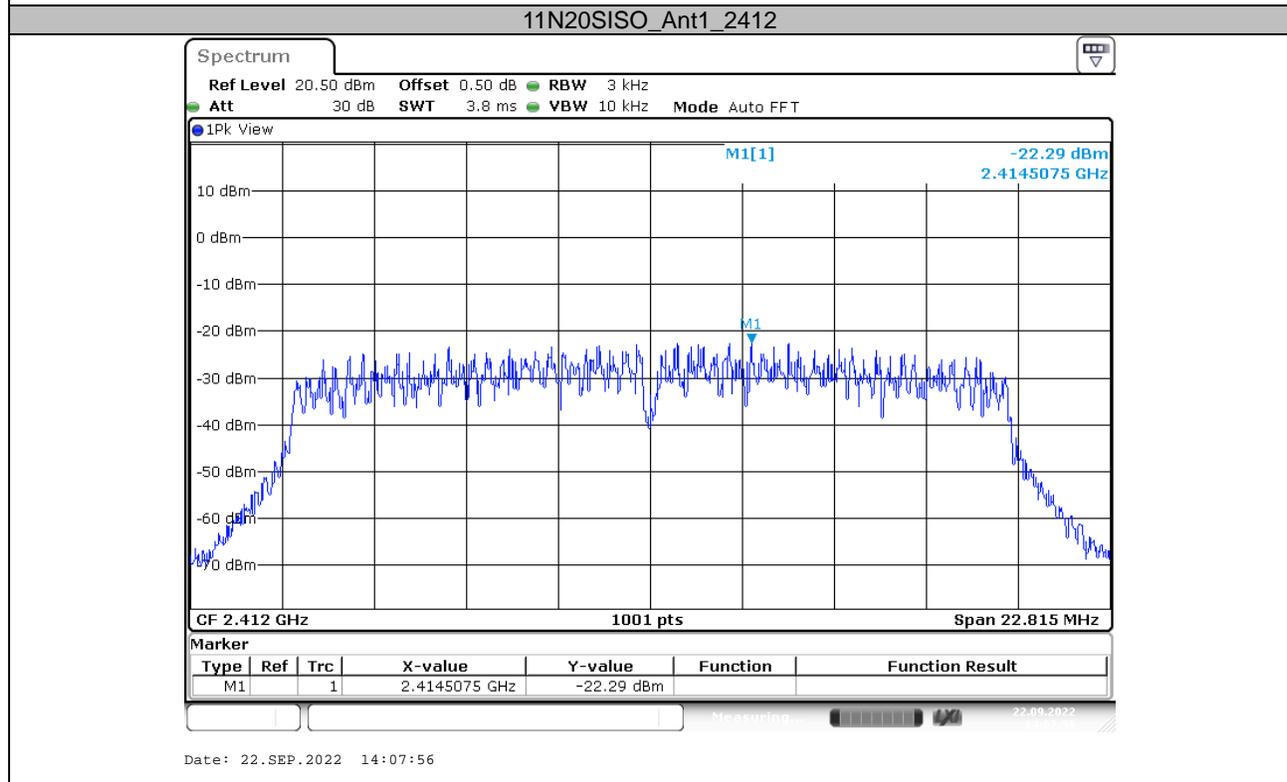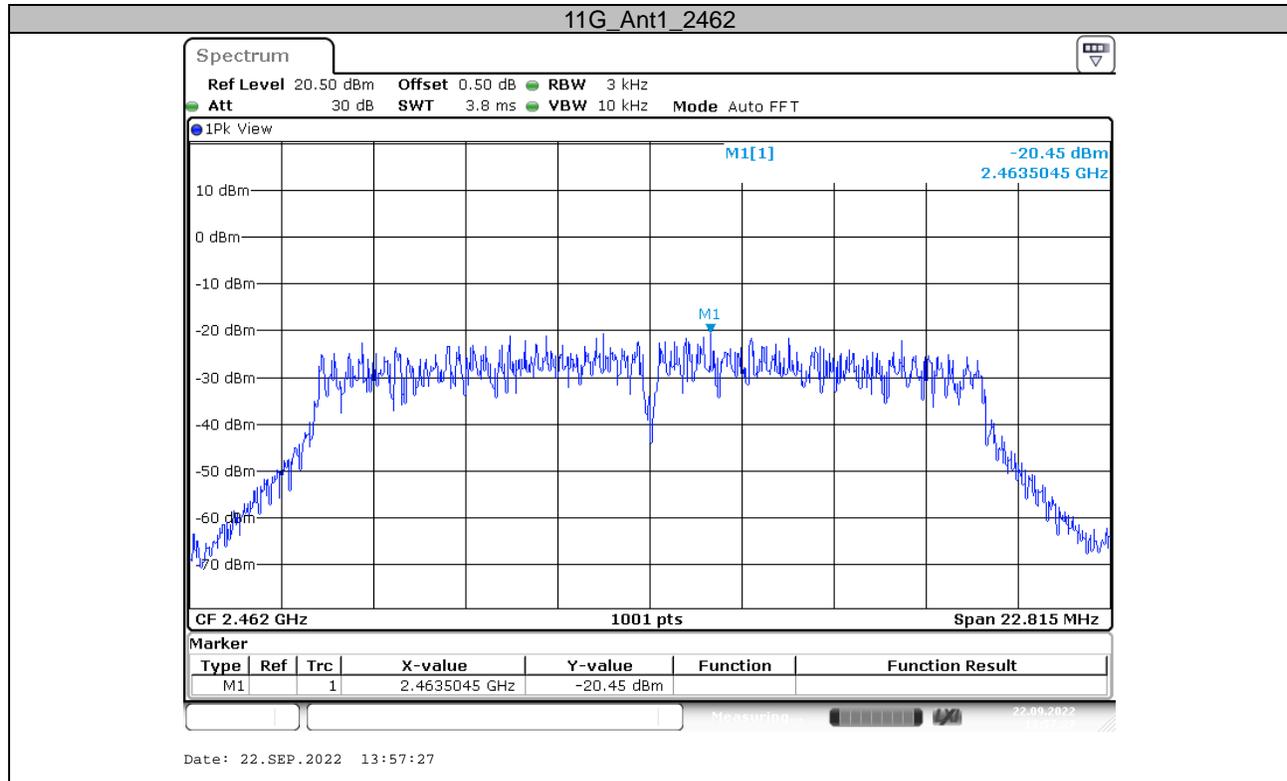

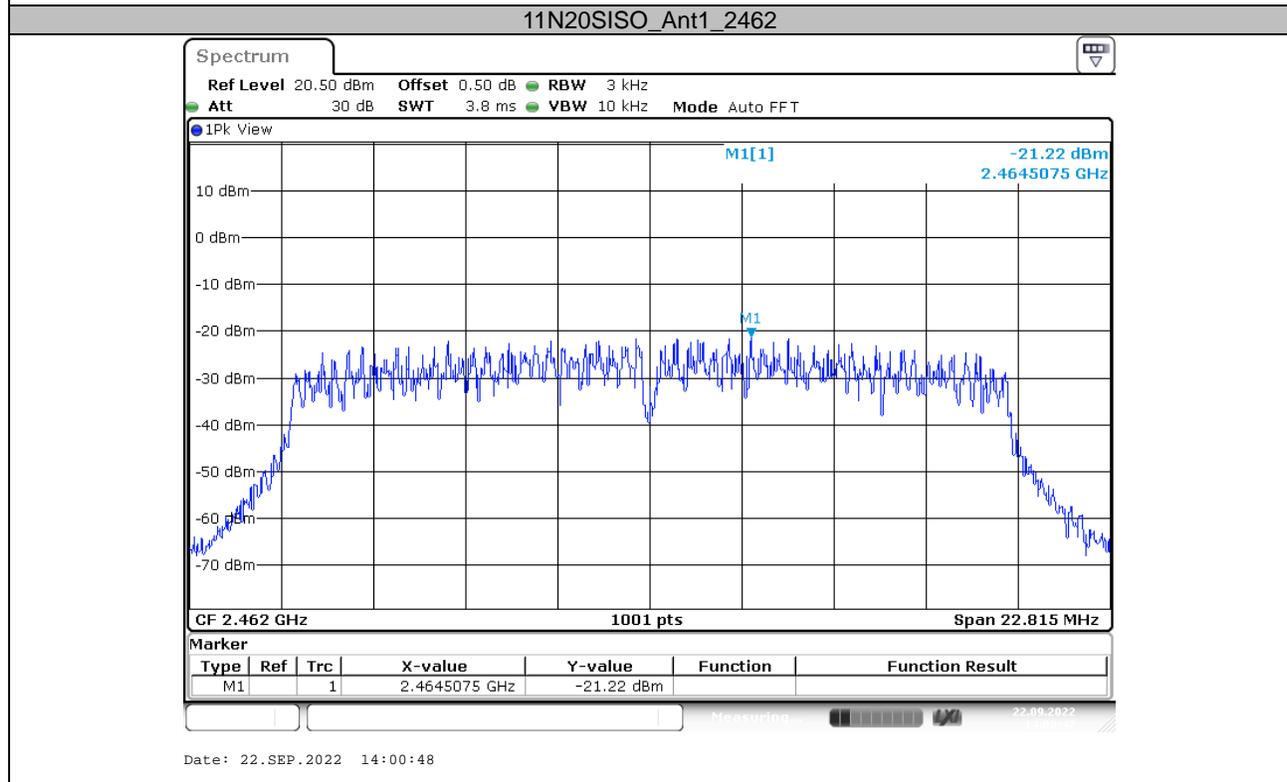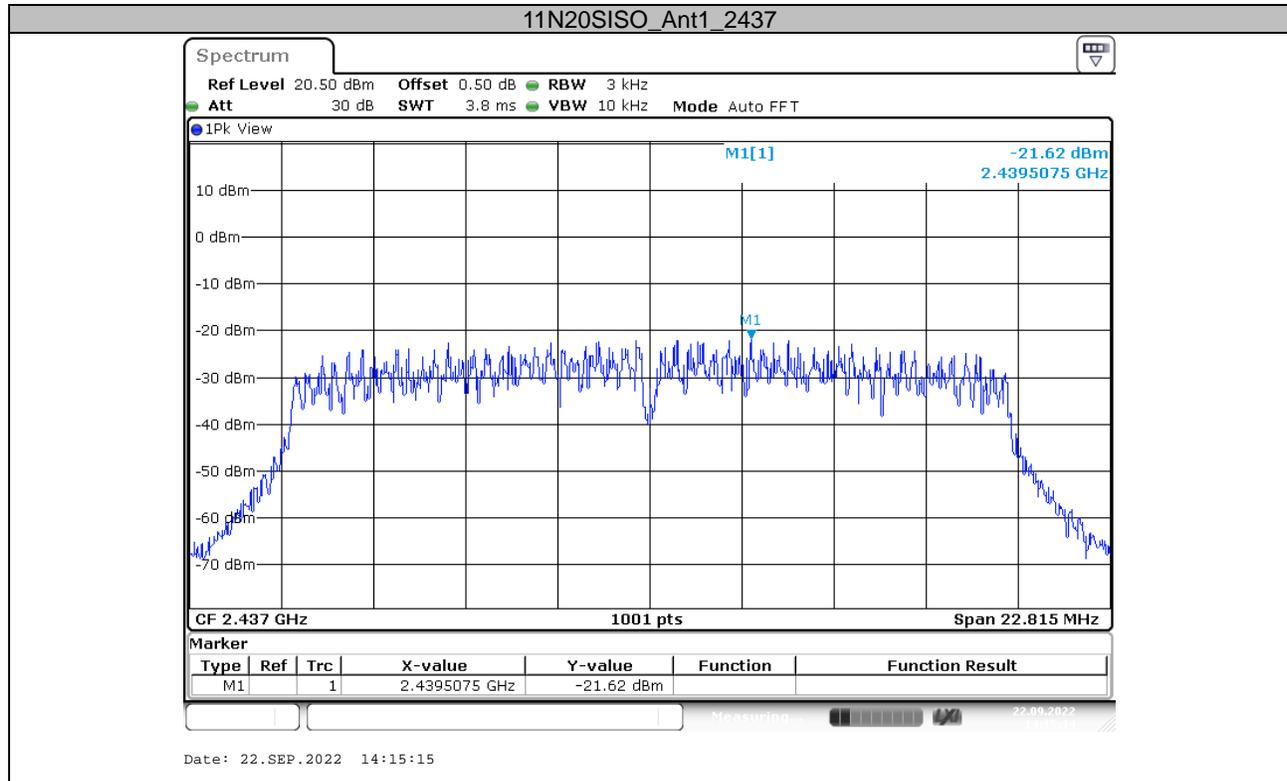




## APPENDIX F: Duty Cycle



### Test Result



TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	0.994	9.926	10.01
		2437	0.994	9.930	10.01
		2462	0.990	9.926	9.97
11G	Ant1	2412	0.161	1.661	9.69
		2437	0.165	1.703	9.69
		2462	0.158	1.661	9.51
11N20SISO	Ant1	2412	0.165	1.703	9.69
		2437	0.161	1.699	9.48
		2462	0.165	1.703	9.69



### Test Graphs

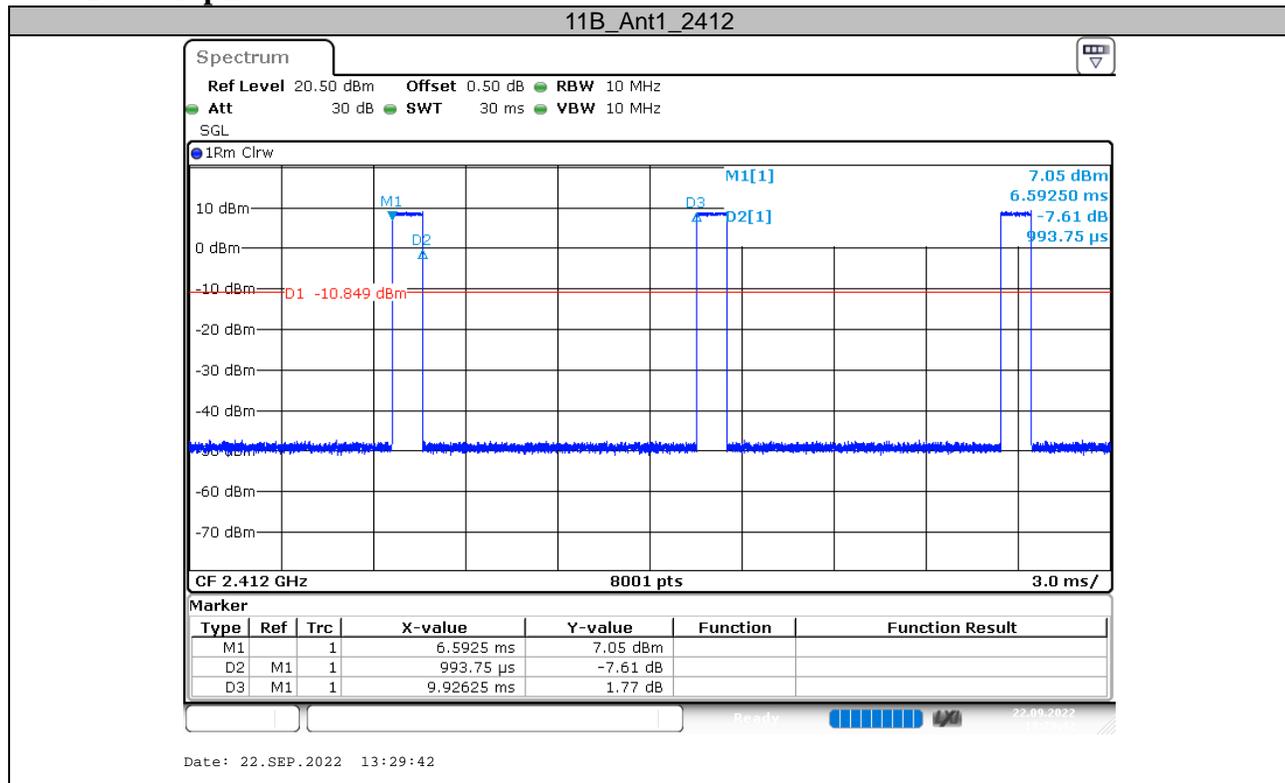

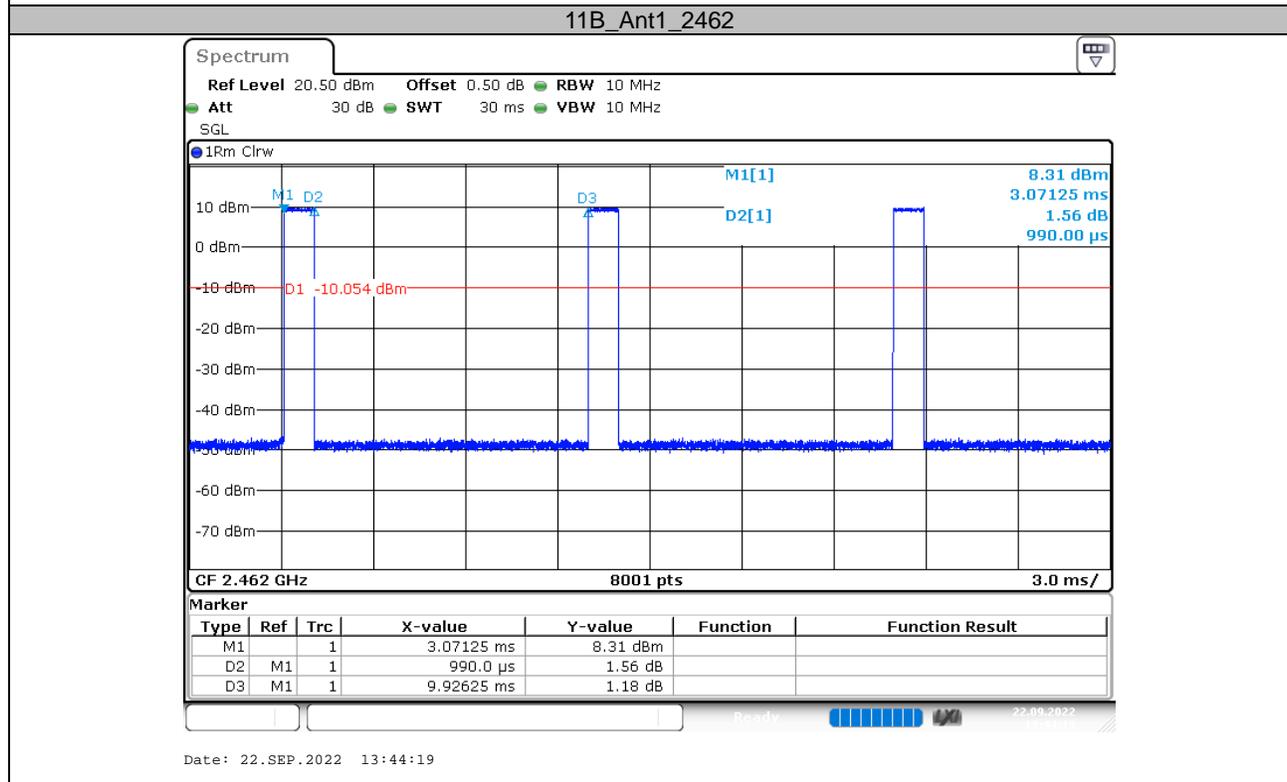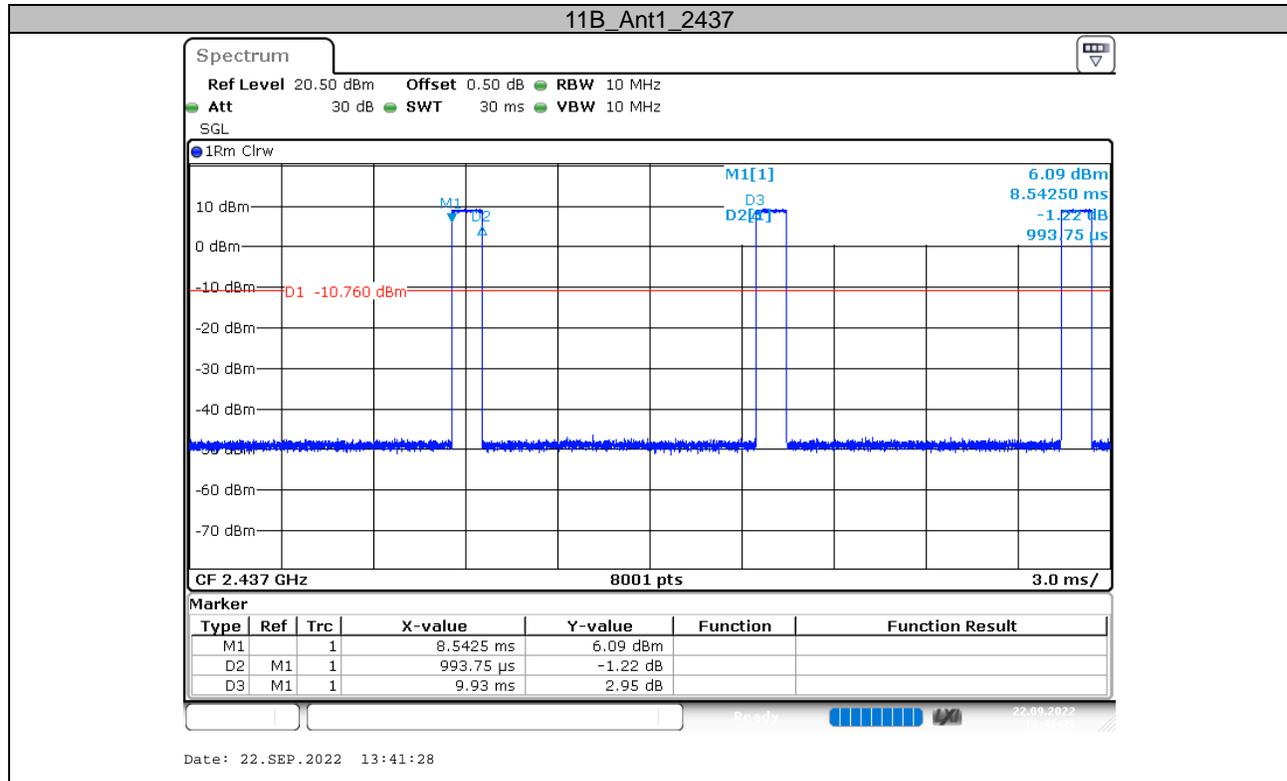

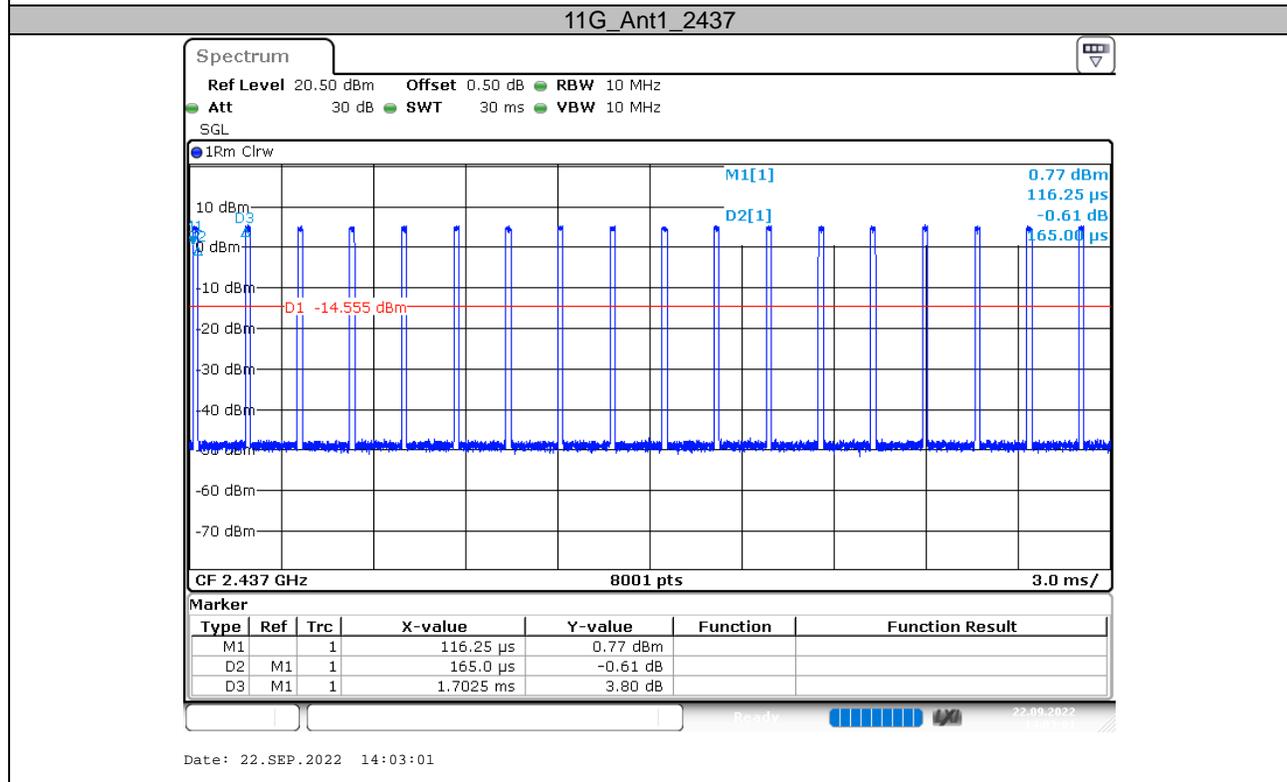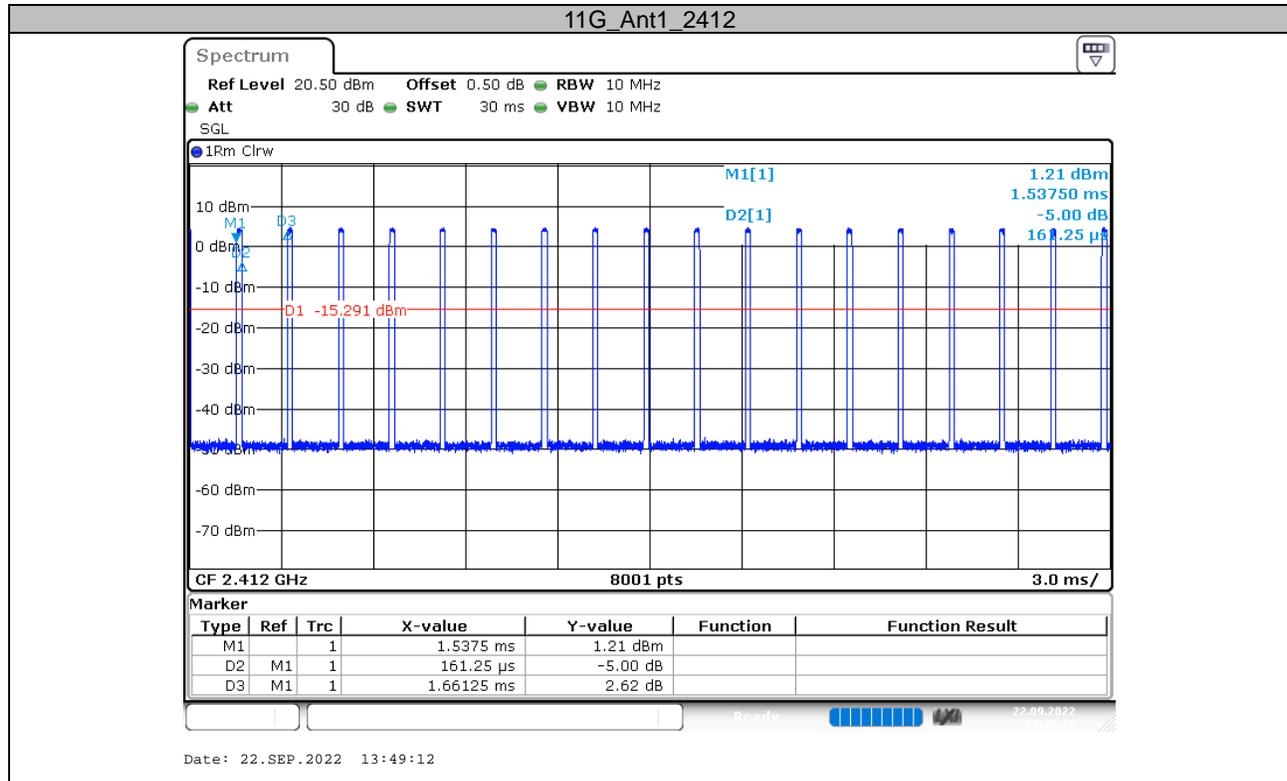

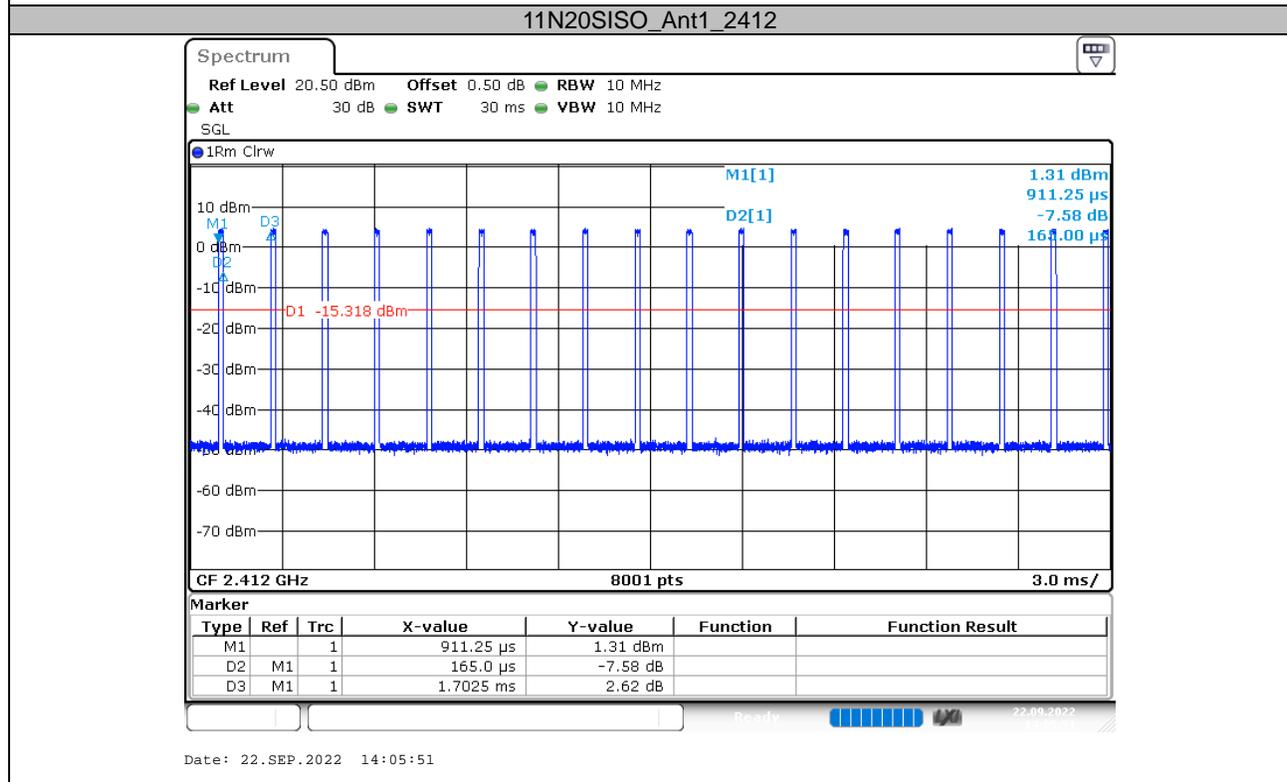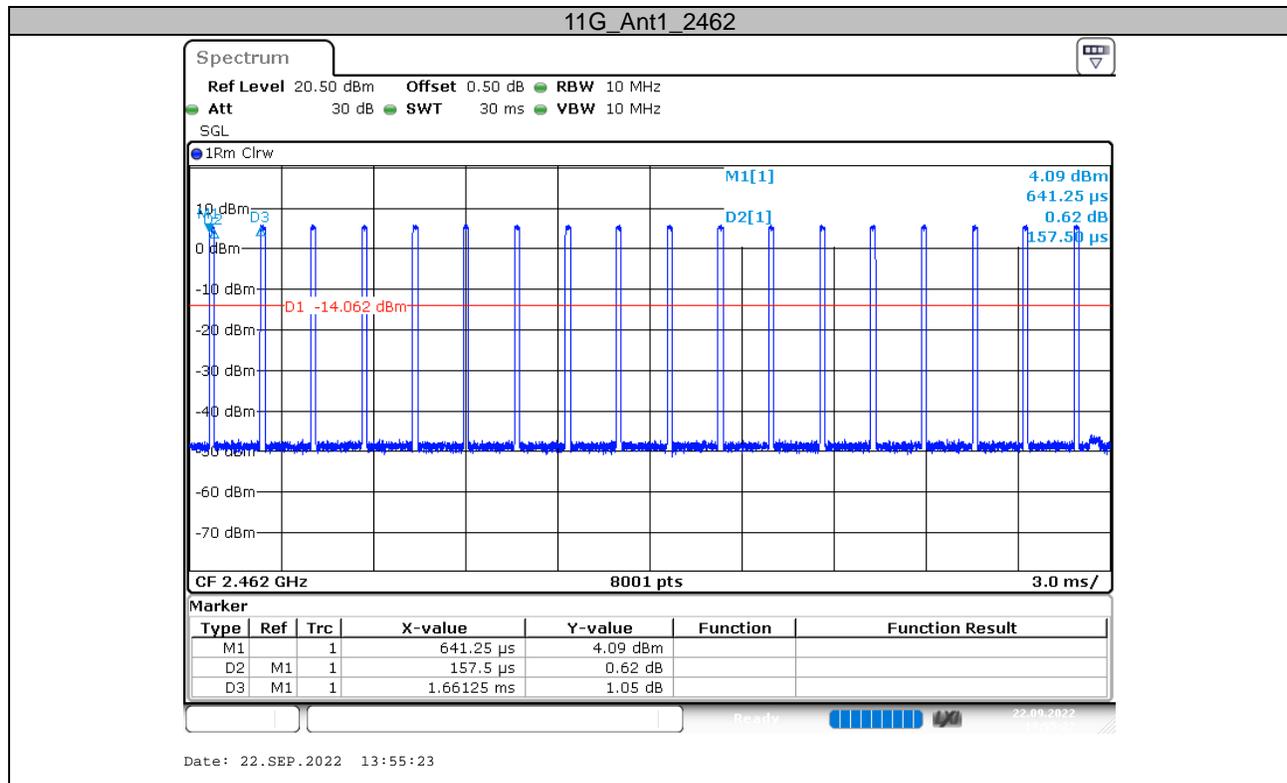

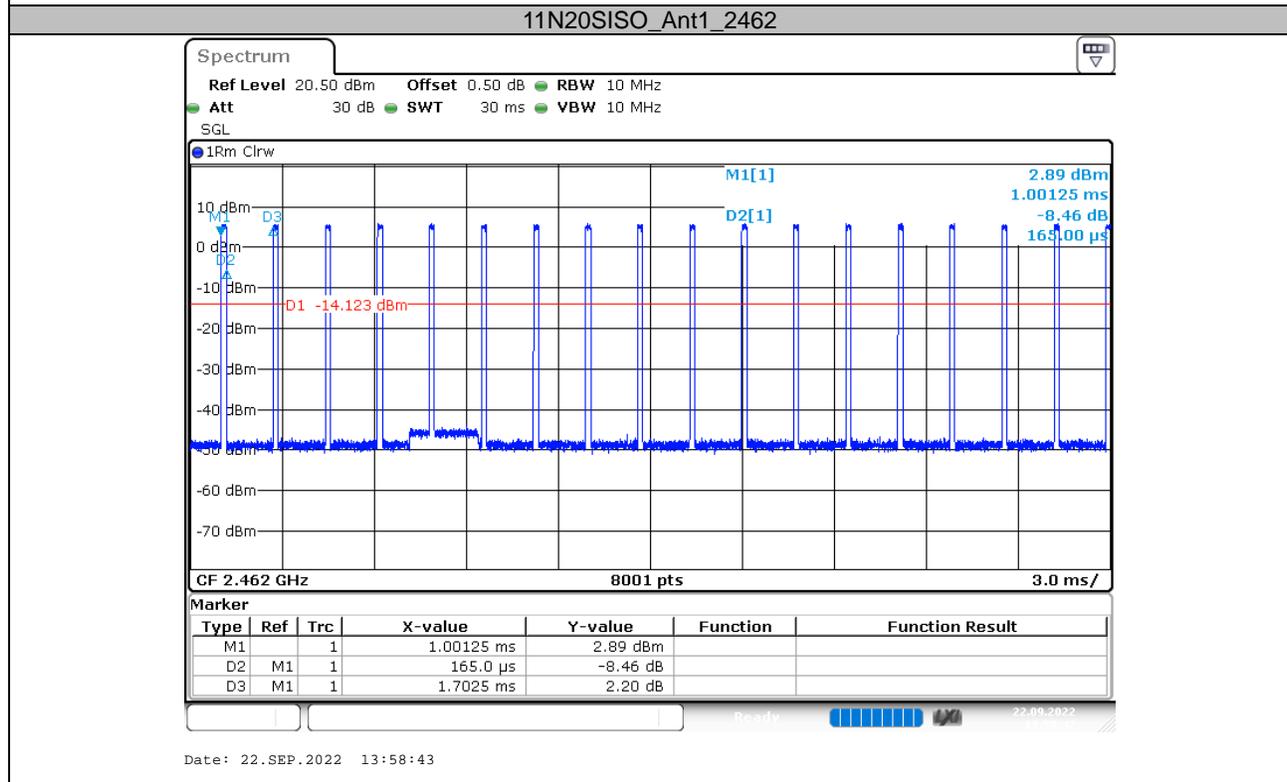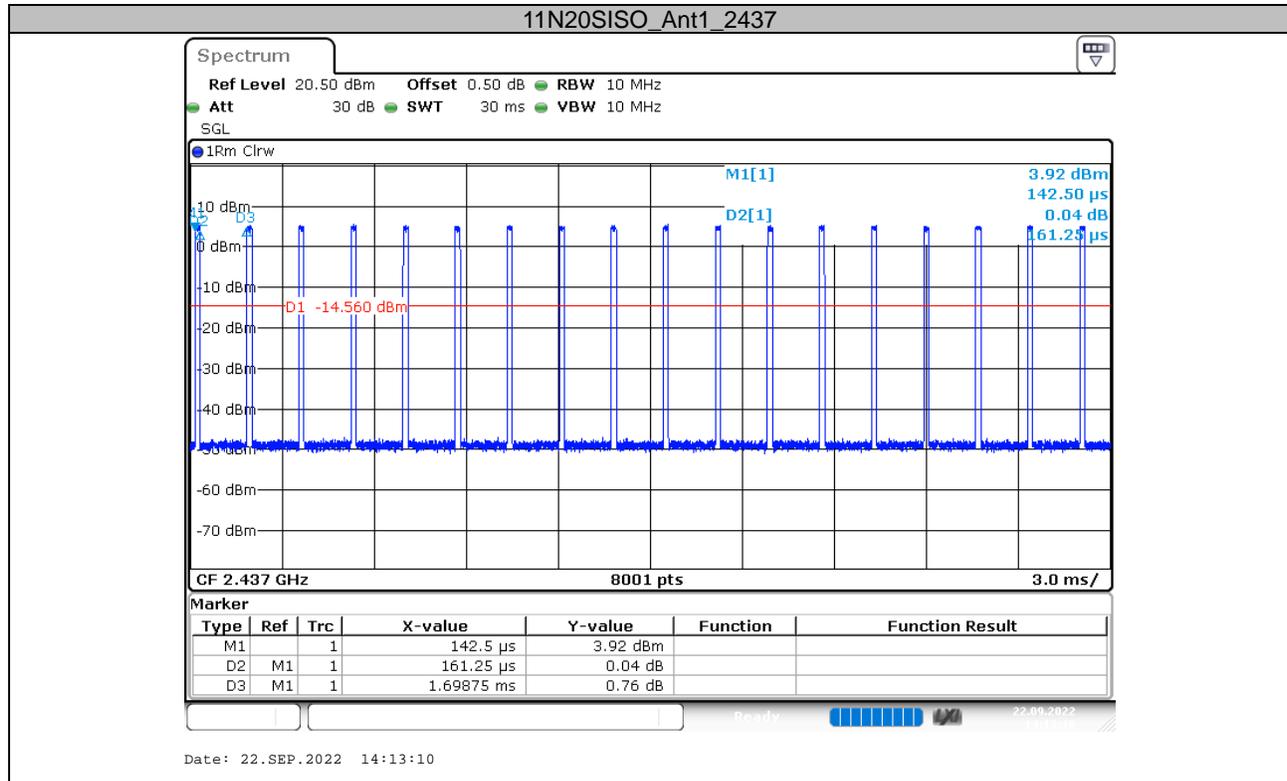

\*\*\*\*\* END OF REPORT \*\*\*\*\*