

# HAC\_E\_Dipole\_835

## DUT: HAC-Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C

### DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2018/1/19;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid:



dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 105.1 V/m; Power Drift = -0.09 dB  
 PMR not calibrated. PMF = 1.000 is applied.  
 E-field emissions = 109.1 V/m  
 Average value of Total=(109.1+103.7) / 2 = 106.4 V/m

PMF scaled E-field

Grid 1 <b>M4</b> <b>107.8 V/m</b>	Grid 2 <b>M4</b> <b>109.1 V/m</b>	Grid 3 <b>M4</b> <b>107.2 V/m</b>
Grid 4 <b>M4</b> <b>66.66 V/m</b>	Grid 5 <b>M4</b> <b>67.01 V/m</b>	Grid 6 <b>M4</b> <b>65.56 V/m</b>
Grid 7 <b>M4</b> <b>102.9 V/m</b>	Grid 8 <b>M4</b> <b>103.7 V/m</b>	Grid 9 <b>M4</b> <b>101.1 V/m</b>

**Cursor:**

Total = 109.1 V/m  
 E Category: M4  
 Location: 0.5, -69, 9.7 mm

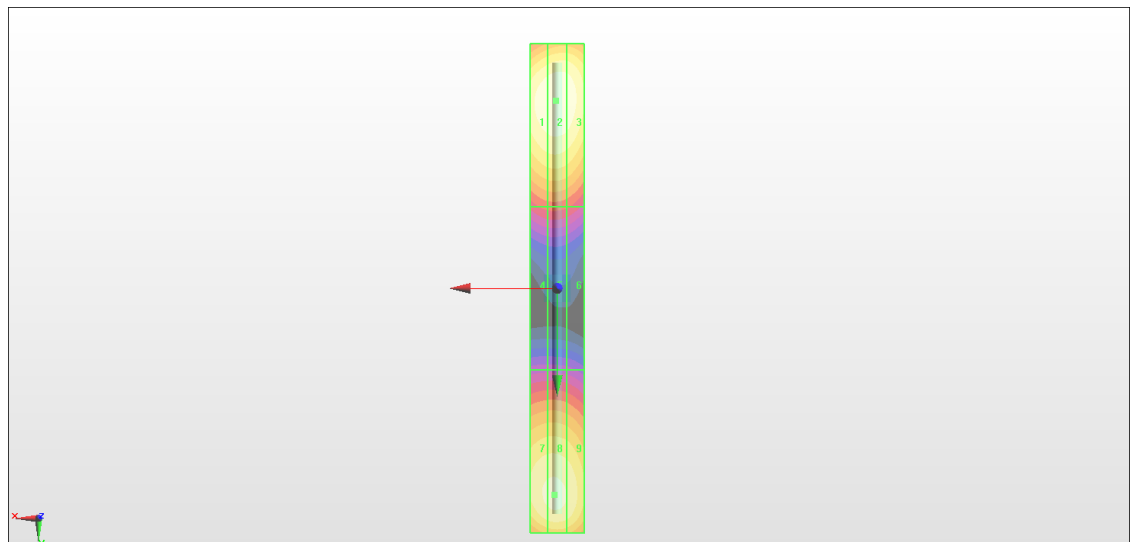

0 dB = 109.1 V/m = 40.76 dBV/m

# HAC\_E\_Dipole\_1880

## DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C

### DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2018/1/19;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### E Scan - measurement distance from the probe sensor center to CD1880 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid:



dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 132.7 V/m; Power Drift = 0.01 dB  
 PMR not calibrated. PMF = 1.000 is applied.  
 E-field emissions = 85.69 V/m  
 Average value of Total=(83.7+85.69) / 2 = 84.695 V/m

PMF scaled E-field

Grid 1 <b>M3</b> <b>82.63 V/m</b>	Grid 2 <b>M3</b> <b>83.70 V/m</b>	Grid 3 <b>M3</b> <b>82.01 V/m</b>
Grid 4 <b>M3</b> <b>65.31 V/m</b>	Grid 5 <b>M3</b> <b>66.65 V/m</b>	Grid 6 <b>M3</b> <b>65.93 V/m</b>
Grid 7 <b>M3</b> <b>83.88 V/m</b>	Grid 8 <b>M3</b> <b>85.69 V/m</b>	Grid 9 <b>M3</b> <b>84.17 V/m</b>

#### Cursor:

Total = 85.69 V/m  
 E Category: M3  
 Location: 0, 31, 9.7 mm

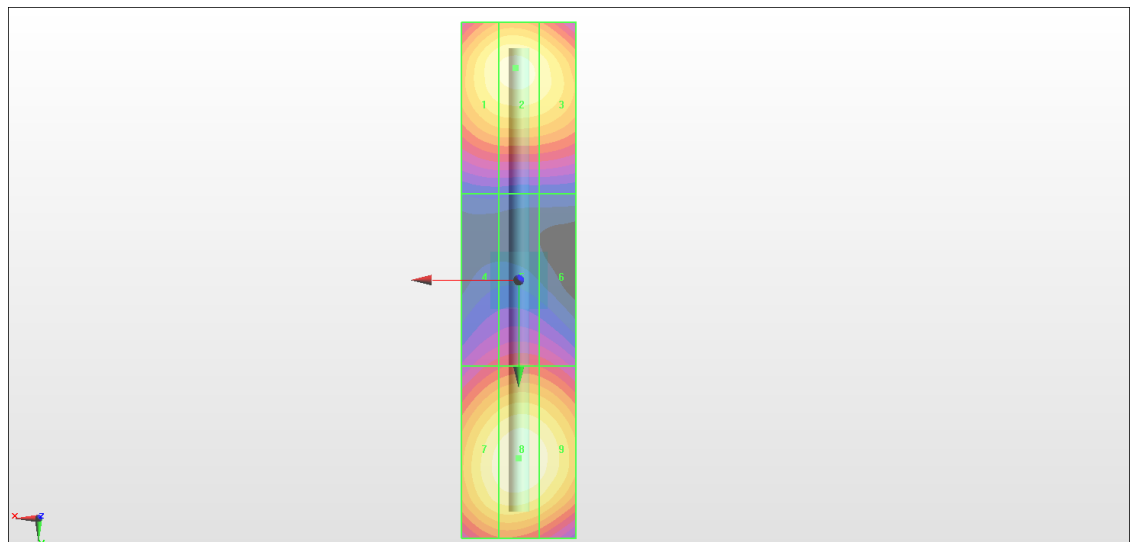

0 dB = 85.69 V/m = 38.66 dBV/m