


18GHz - 27.5GHz

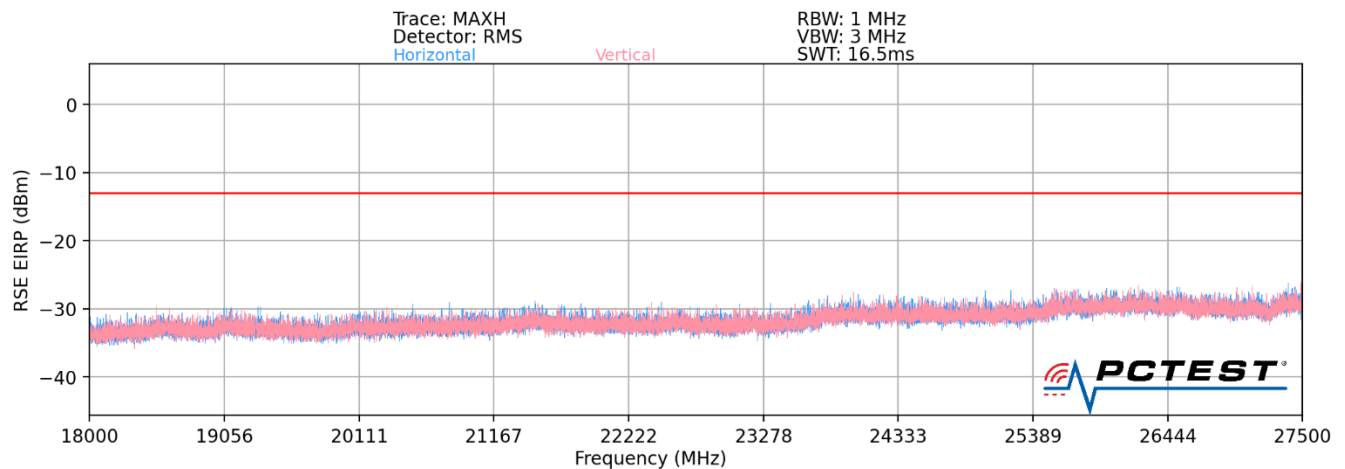

Plot 7-42. Ant 3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
27241.33	Low	50	V	QPSK	H	-	-	-36.01	-13.00	-23.01
27320.66	Mid	50	V	QPSK	H	-	-	-37.14	-13.00	-24.14
27252.00	High	50	V	QPSK	H	-	-	-37.11	-13.00	-24.11


Table 7-34. Ant 3 - DFT-s 2Tx -Spurious Emissions Table (18GHz - 27.5GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 67 of 152

28.35GHz - 40GHz

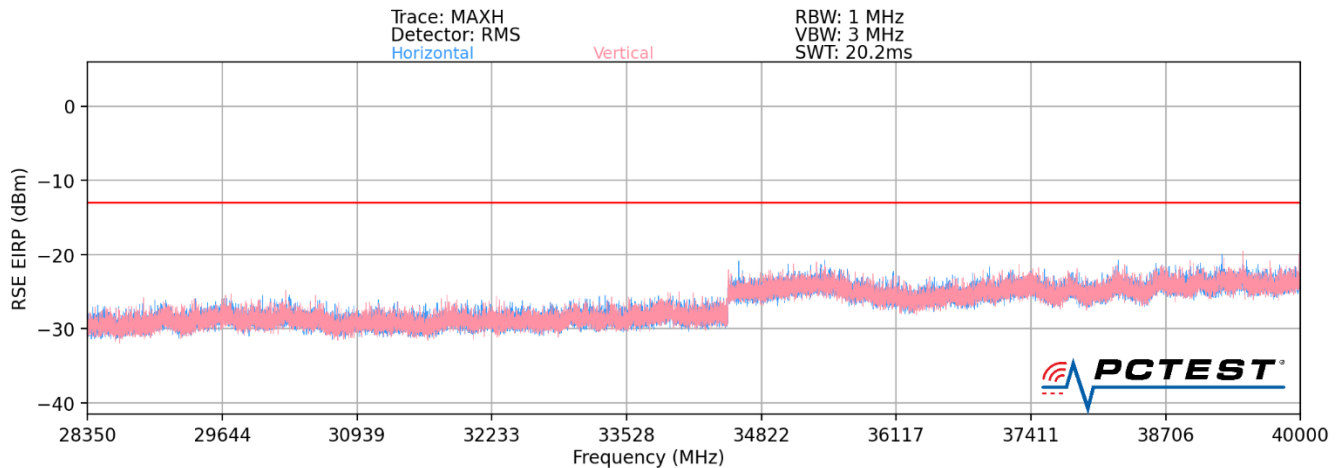

Plot 7-43. Ant 3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
28591.68	Low	50	V	QPSK	H	-	-	-36.84	-13.00	-23.84
26649.44	Mid	50	V	QPSK	H	-	-	-37.78	-13.00	-24.78
28674.46	High	50	V	QPSK	H	-	-	-37.87	-13.00	-24.87


Table 7-35. Ant 3 - DFT-s 2Tx -Spurious Emissions Table (28.35GHz - 40GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 68 of 152

40GHz - 60GHz

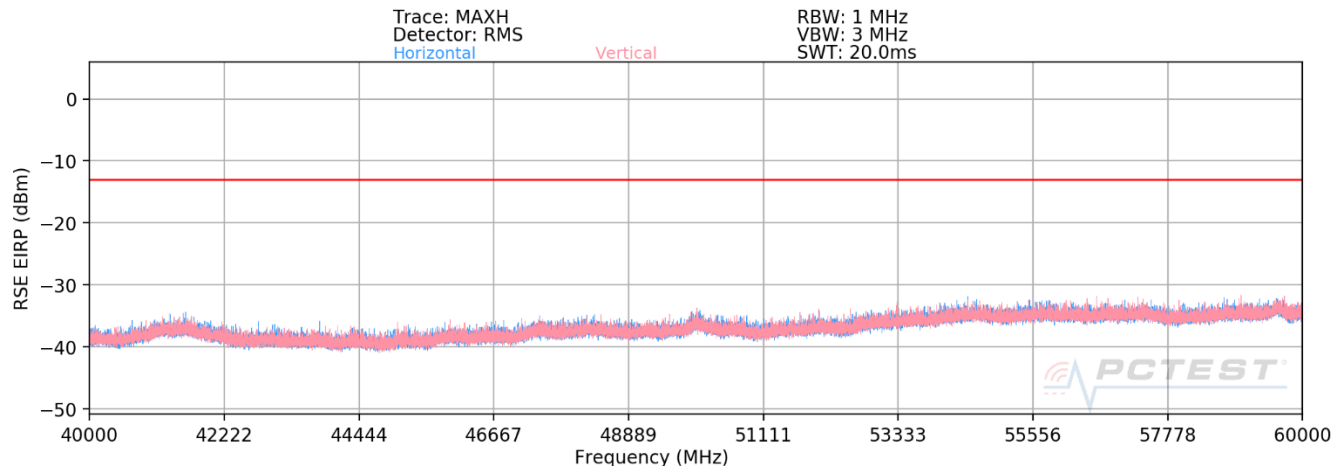

Plot 7-44. Ant 3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55050.80	Low	50	H	QPSK	H	198	148	-39.51	-13.00	-26.51
55850.97	Mid	50	H	QPSK	H	188	169	-38.64	-13.00	-25.64
56641.94	High	50	H	QPSK	H	201	154	-38.78	-13.00	-25.78


Table 7-36. Ant 3 - DFT-s 2Tx -Spurious Emissions Table (40GHz - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 69 of 152

60GHz - 90GHz

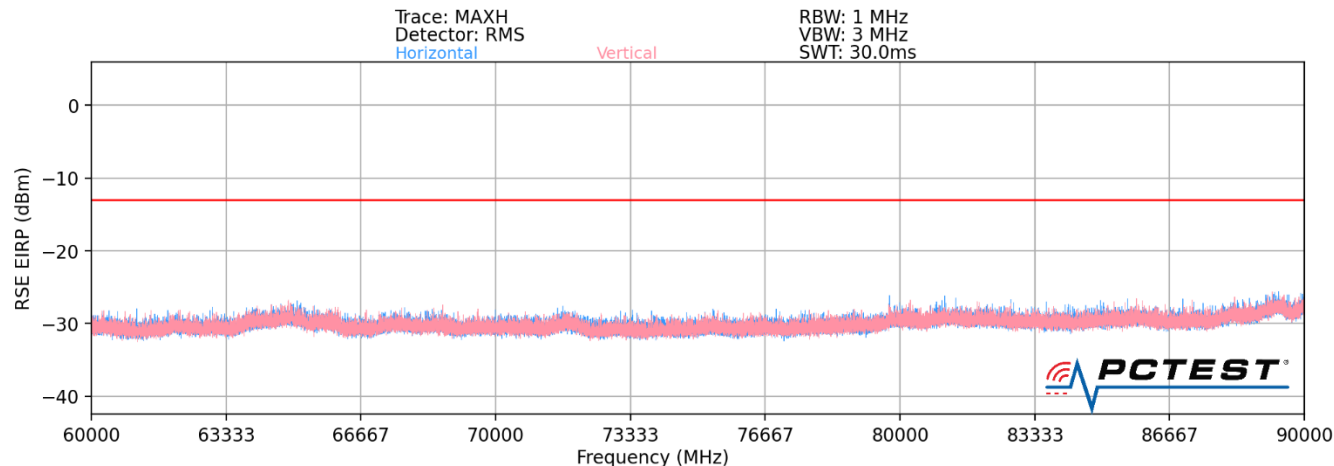

Plot 7-45. Ant 3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74835.00	Low	50	H	QPSK	H	-	-	-45.70	-13.00	-32.70
83776.46	Mid	50	V	QPSK	H	-	-	-44.71	-13.00	-31.71
84977.92	High	50	V	QPSK	H	-	-	-44.68	-13.00	-31.68

Table 7-37. Ant 3 - MIMO -Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.


FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 70 of 152

© 2020 PCTEST

V1.0

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

90GHz - 100GHz

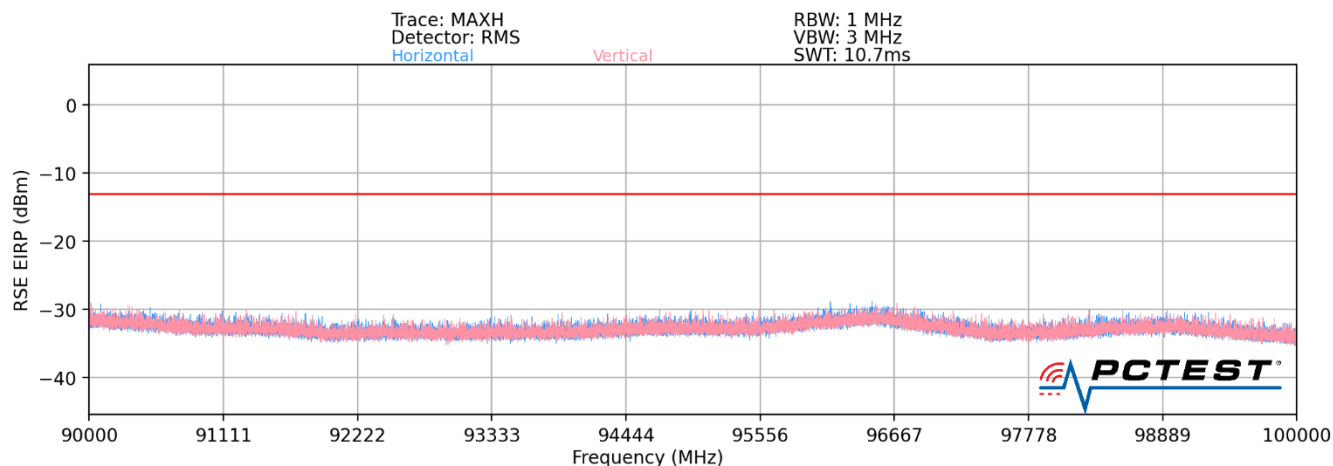

Plot 7-46. Ant 3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel DFT-s 2Tx – EN-DC Anchor B2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
92435.00	Low	50	V	QPSK	H	-	-	-40.59	-13.00	-27.59
94568.33	Mid	50	V	QPSK	H	-	-	-45.08	-13.00	-32.08
99821.14	High	50	V	QPSK	H	-	-	-46.21	-13.00	-33.21

Table 7-38. Ant 3 – DFT-s 2Tx -Spurious Emissions Table (90GHz - 100GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 71 of 152


© 2020 PCTEST

V1.0

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Band n261 – Ant 4

30MHz - 1GHz

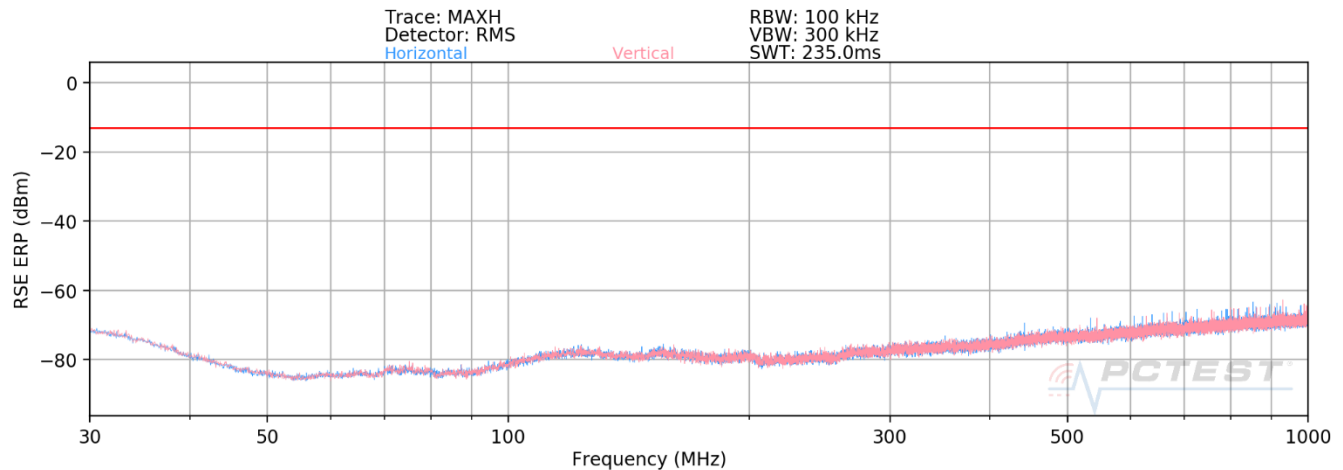

Plot 7-40. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
724.36	Low	50	H	QPSK	H	-	-	-70.42	-13.00	-57.42
659.47	Mid	50	H	QPSK	H	-	-	-75.33	-13.00	-62.33
902.42	High	50	H	QPSK	H	-	-	-69.54	-13.00	-56.54


Table 7-32. Ant 4 - MIMO -Spurious Emissions Table (30MHz - 1GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 72 of 152

1GHz - 18GHz

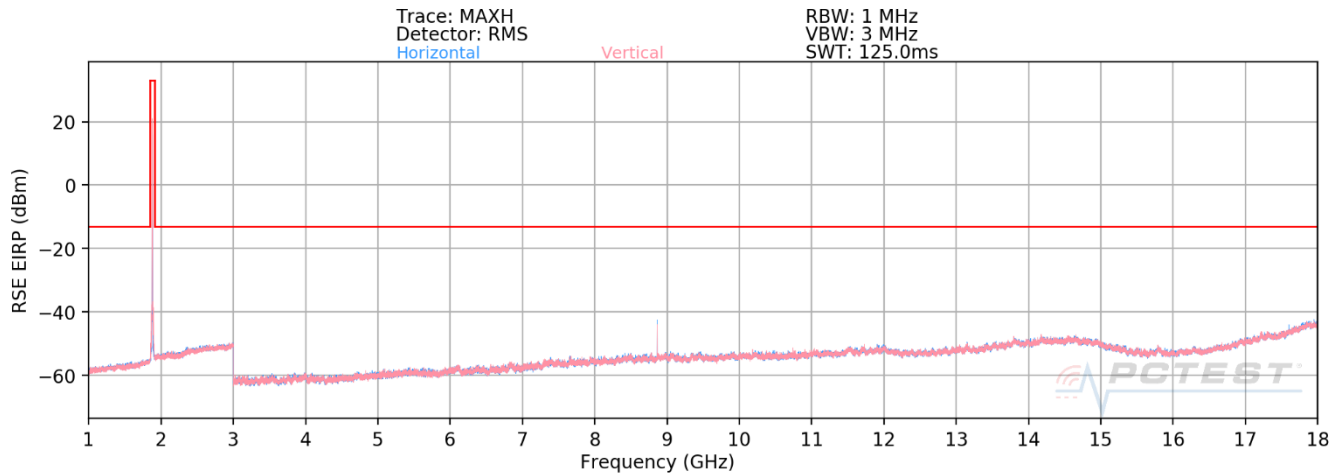

Plot 7-41. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8801.42	Low	50	H	QPSK	H	-	-	-45.41	-13.00	-32.41
9114.52	Mid	50	H	QPSK	H	163	251	-38.45	-13.00	-25.45
9006.39	High	50	H	QPSK	H	175	1	-39.21	-13.00	-26.21


Table 7-33. Ant 4 - MIMO -Spurious Emissions Table (1GHz - 18GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 73 of 152

18GHz - 27.5GHz

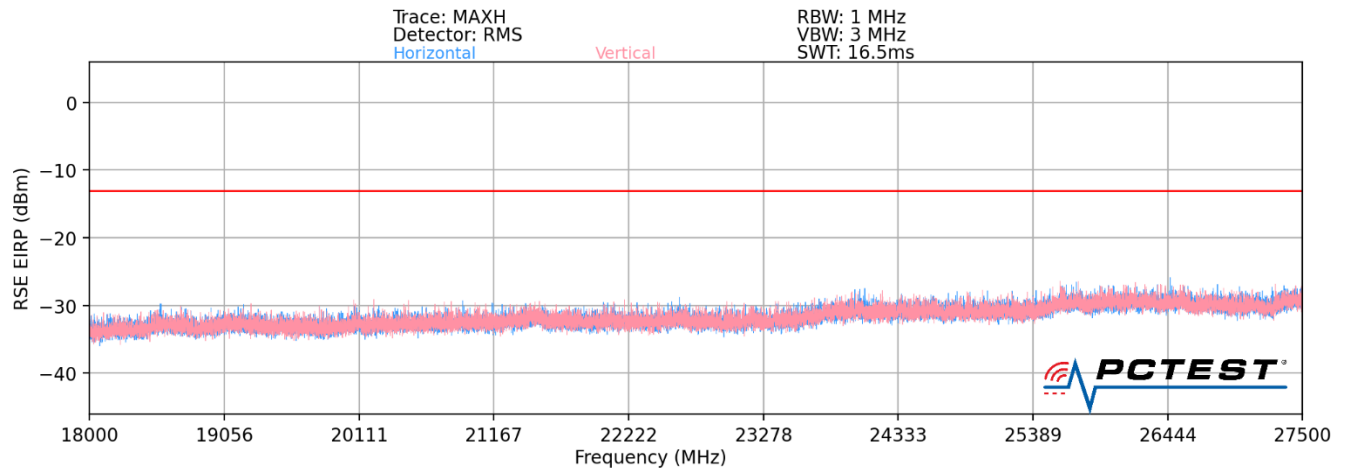

Plot 7-42. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
27242.33	Low	50	V	QPSK	H	-	-	-35.89	-13.00	-22.89
27321.66	Mid	50	V	QPSK	H	-	-	-36.48	-13.00	-23.48
27253.00	High	50	V	QPSK	H	-	-	-36.88	-13.00	-23.88


Table 7-34. Ant 4 - DFT-s 2Tx -Spurious Emissions Table (18GHz - 27.5GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 74 of 152

28.35GHz - 40GHz

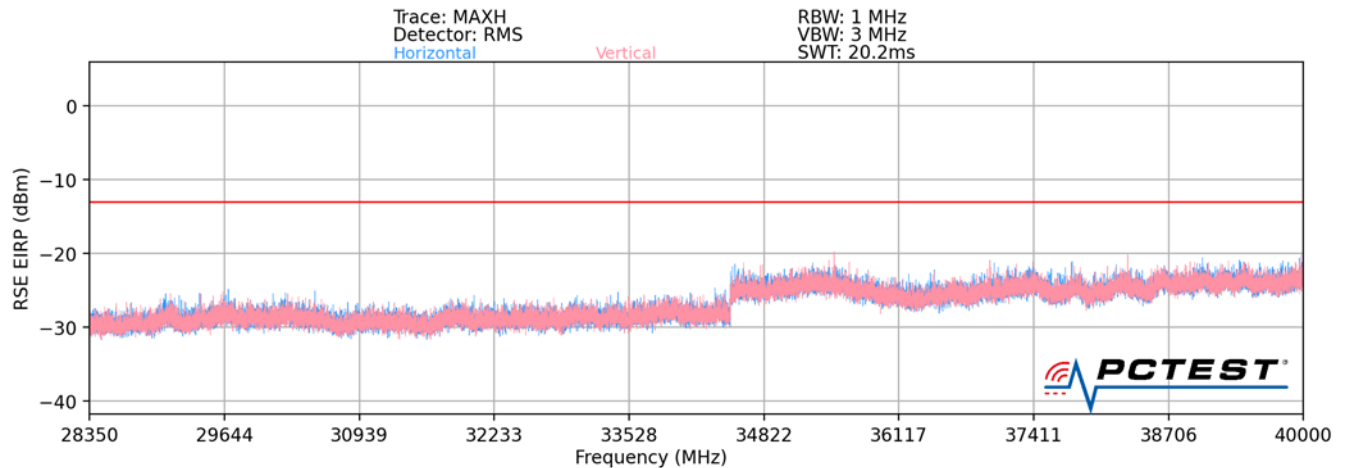

??

Plot 7-43. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
28600.24	Low	50	V	QPSK	H	-	-	-36.49	-13.00	-23.49
26651.23	Mid	50	V	QPSK	H	-	-	-37.98	-13.00	-24.98
28677.22	High	50	V	QPSK	H	-	-	-36.35	-13.00	-23.35


Table 7-35. Ant 4 - DFT-s 2Tx -Spurious Emissions Table (28.35GHz - 40GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 75 of 152

40GHz - 60GHz

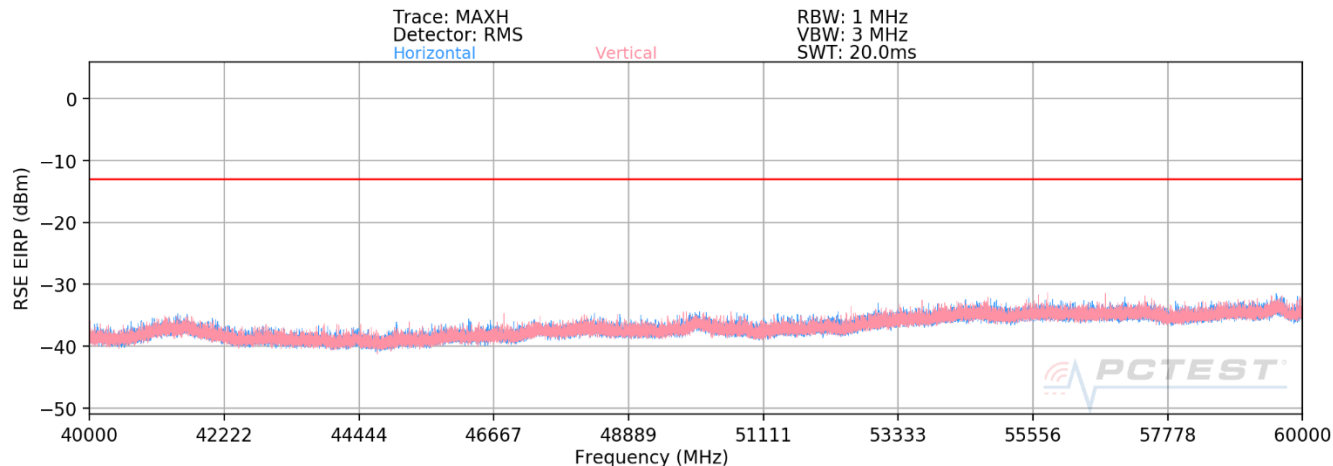

Plot 7-44. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55051.22	Low	50	H	QPSK	V	-	-	-42.26	-13.00	-29.26
55850.58	Mid	50	H	QPSK	V	-	-	-41.54	-13.00	-28.54
56650.38	High	50	H	QPSK	V	329	64	-42.36	-13.00	-29.36


Table 7-36. Ant 4 - DFT-s 2Tx -Spurious Emissions Table (40GHz - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 76 of 152

60GHz - 90GHz

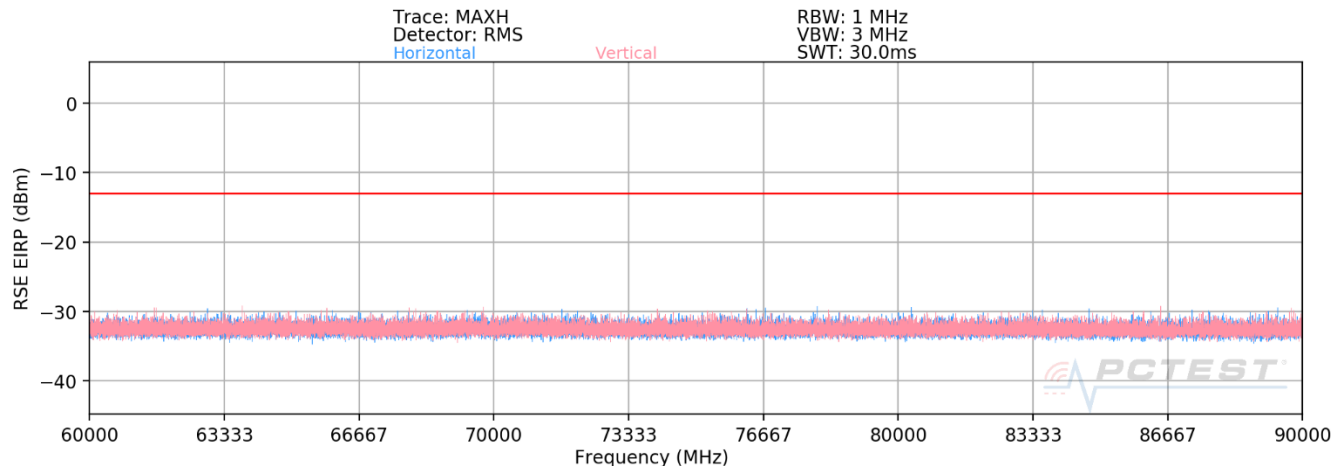

Plot 7-45. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74835.00	Low	50	H	QPSK	H	-	-	-43.90	-13.00	-30.90
83776.46	Mid	50	V	QPSK	H	-	-	-44.64	-13.00	-31.64
84977.92	High	50	V	QPSK	H	-	-	-44.46	-13.00	-31.46


Table 7-37. Ant 4 - MIMO -Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 77 of 152

90GHz - 100GHz

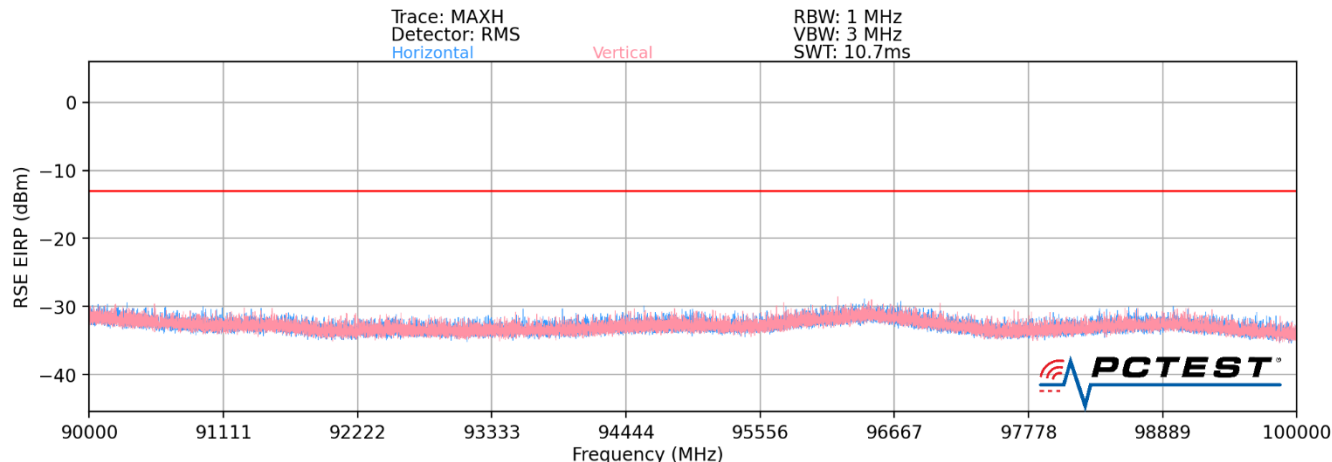

Plot 7-46. Ant 4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel DFT-s 2Tx – EN-DC Anchor B2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
94782.22	Low	50	H	QPSK	H	-	-	-41.00	-13.00	-28.00
95478.25	Mid	50	H	QPSK	H	-	-	-41.21	-13.00	-28.21
96211.63	High	50	H	QPSK	H	-	-	-40.70	-13.00	-27.70

Table 7-38. Ant 4 – DFT-s 2Tx -Spurious Emissions Table (90GHz - 100GHz)


Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 78 of 152

Band n260- Ant 1

30MHz - 1GHz

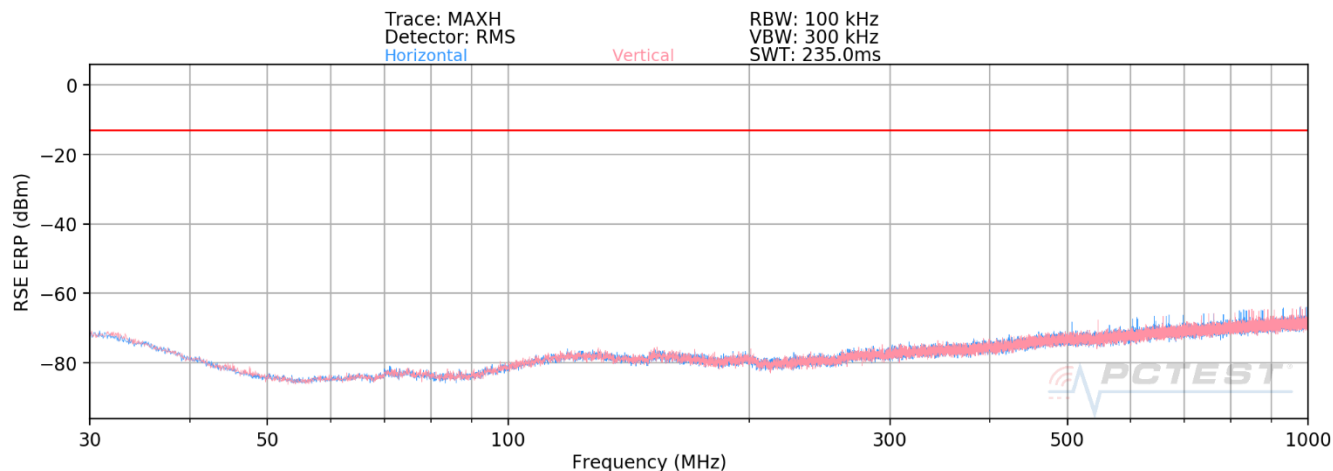

Plot 7-47. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
777.69	Low	50	H	QPSK	H	-	-	-71.55	-13.00	-58.55
624.58	Mid	50	H	QPSK	H	-	-	-72.24	-13.00	-59.24
870.14	High	50	H	QPSK	H	-	-	-71.04	-13.00	-58.04


Table 7-39. Ant 1 - SISO -Spurious Emissions Table (30MHz - 1GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 79 of 152

1GHz - 18GHz

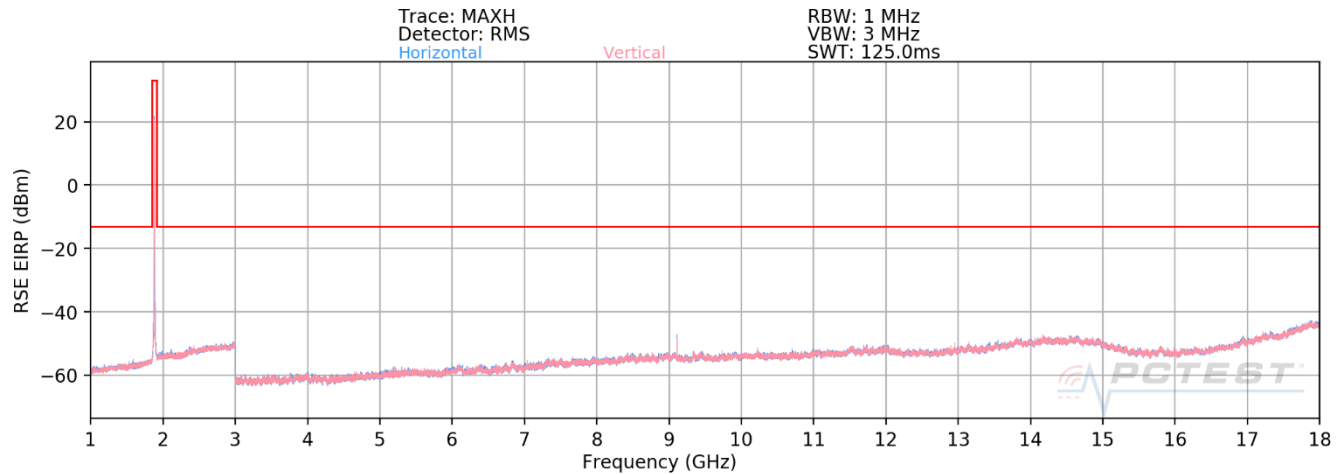

Plot 7-48. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
9089.65	Low	50	H	QPSK	H	149	116	-38.00	-13.00	-25.00
9111.76	Mid	50	H	QPSK	H	148	100	-36.03	-13.00	-23.03
9153.43	High	50	H	QPSK	H	167	252	-35.97	-13.00	-22.97


Table 7-40. Ant 1 - SISO -Spurious Emissions Table (1GHz - 18GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 80 of 152

18GHz – 37GHz

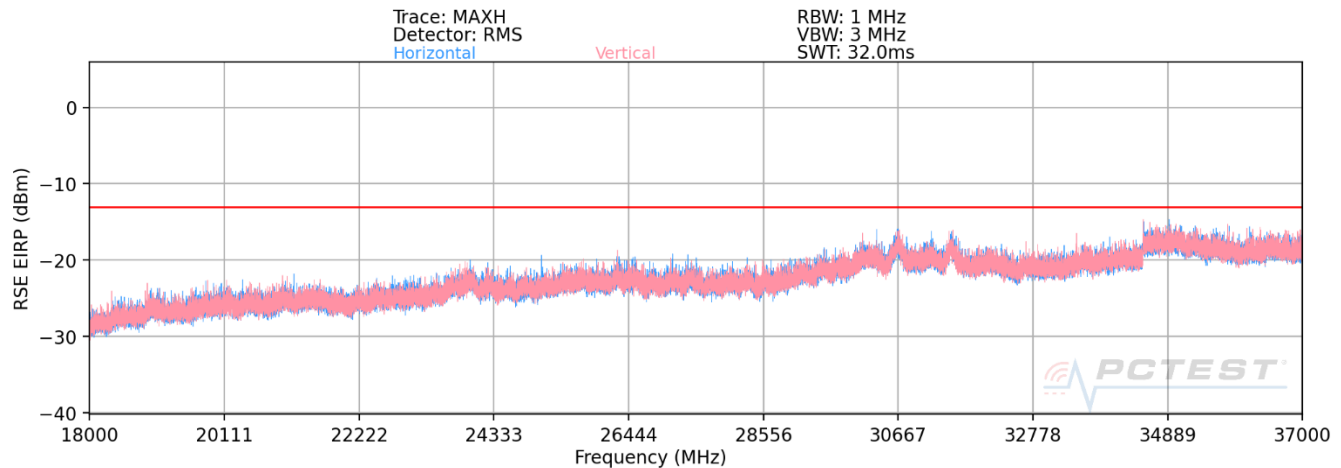

Plot 7-49. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36563.50	Low	50	V	QPSK	V	362	283	-39.63	-13.00	-26.63
36696.85	Mid	50	V	QPSK	V	-	-	-39.38	-13.00	-26.38
31180.50	High	50	V	QPSK	V	-	-	-39.46	-13.00	-26.46


Table 7-41. Ant 1 - SISO -Spurious Emissions Table (18GHz – 37GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 81 of 152

40GHz - 60GHz

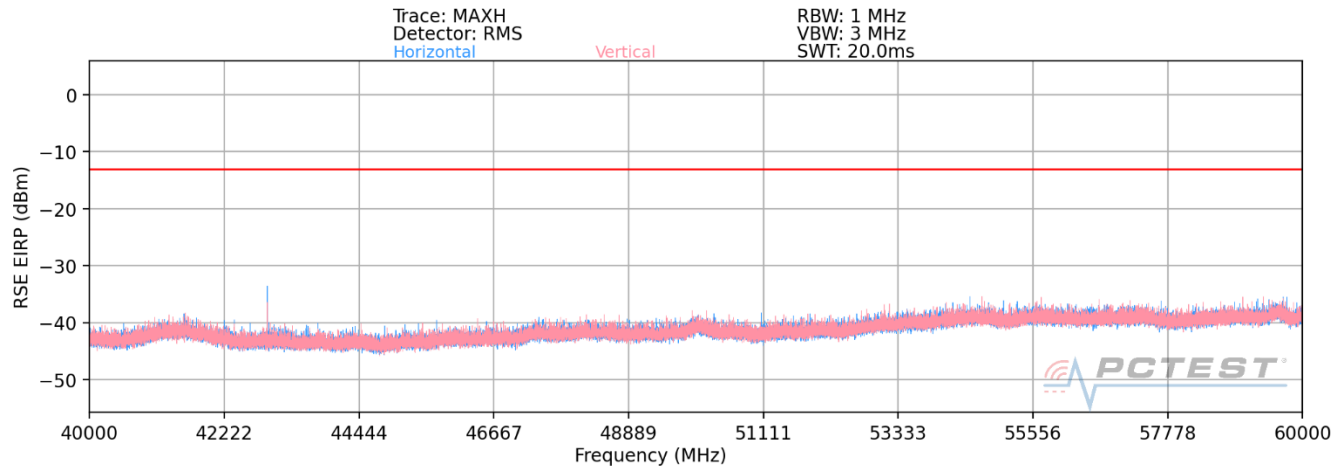

Plot 7-50. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42931.00	Low	50	H	QPSK	V	332	353	-38.26	-13.00	-25.26
44082.92	Mid	50	V	QPSK	V	252	8	-37.20	-13.00	-24.20
46233.50	High	50	V	QPSK	V	253	11	-39.57	-13.00	-26.57

Table 7-42. Ant 1 - SISO -Spurious Emissions Table (40GHz - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.


FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 82 of 152

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0

60GHz - 90GHz

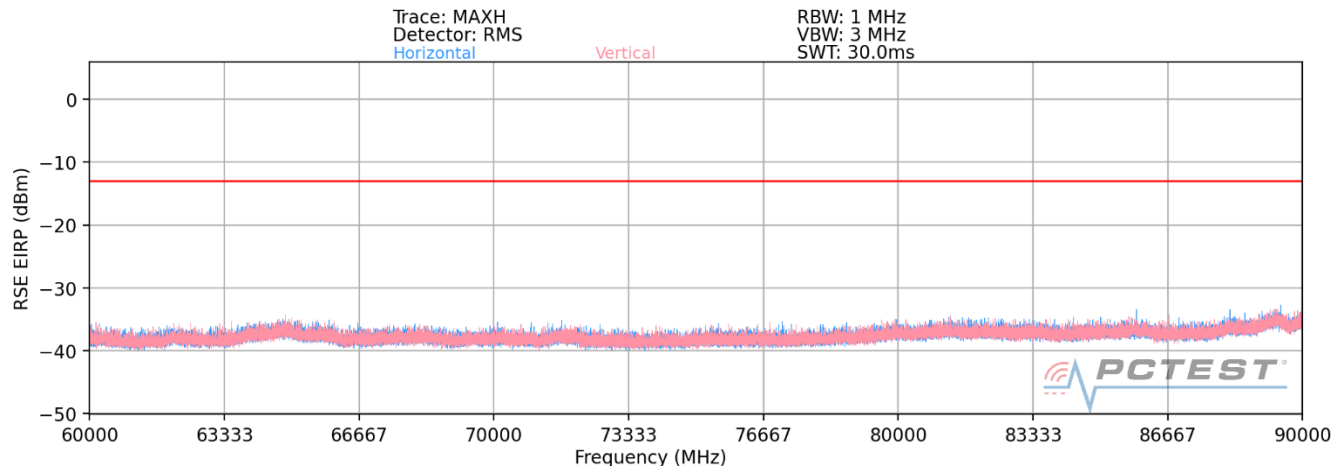

Plot 7-51. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74097.35	Low	50	V	QPSK	H	234	1	-30.06	-13.00	-17.06
76997.91	Mid	50	V	QPSK	H	235	1	-31.50	-13.00	-18.50
76543.00	High	50	V	QPSK	H	-	-	-44.01	-13.00	-31.01


Table 7-43. Ant 1 - SISO -Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 83 of 152

90GHz - 140GHz

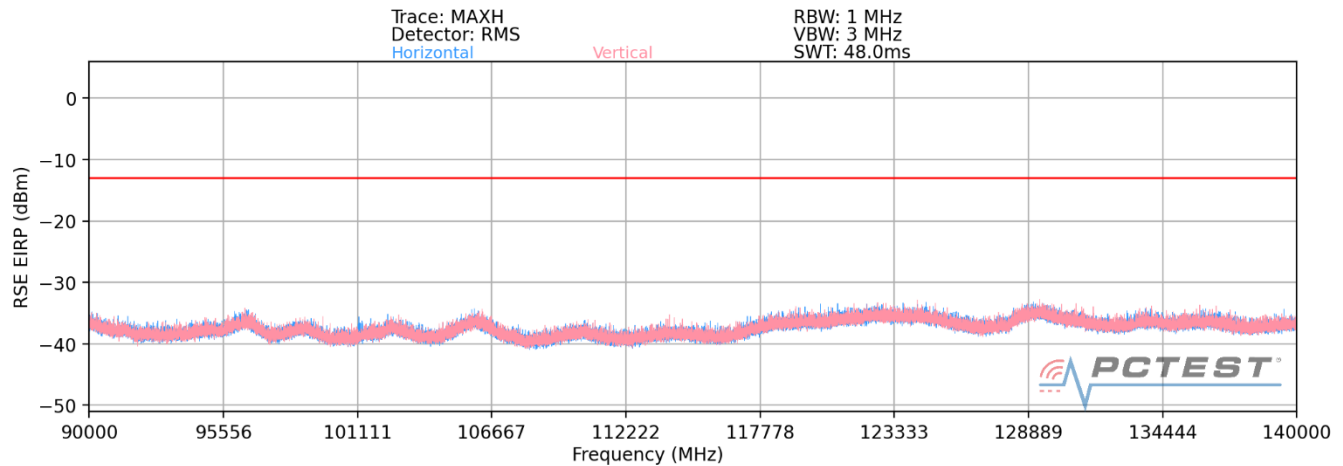

Plot 7-52. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111077.64	Low	50	V	QPSK	V	39	351	-38.82	-13.00	-25.82
115501.22	Mid	50	V	QPSK	V	61	9	-40.89	-13.00	-27.89
119926.53	High	50	V	QPSK	V	39	349	-37.13	-13.00	-24.13


Table 7-44. Ant 1 - SISO -Spurious Emissions Table (90GHz - 140GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 84 of 152

140GHz - 170GHz

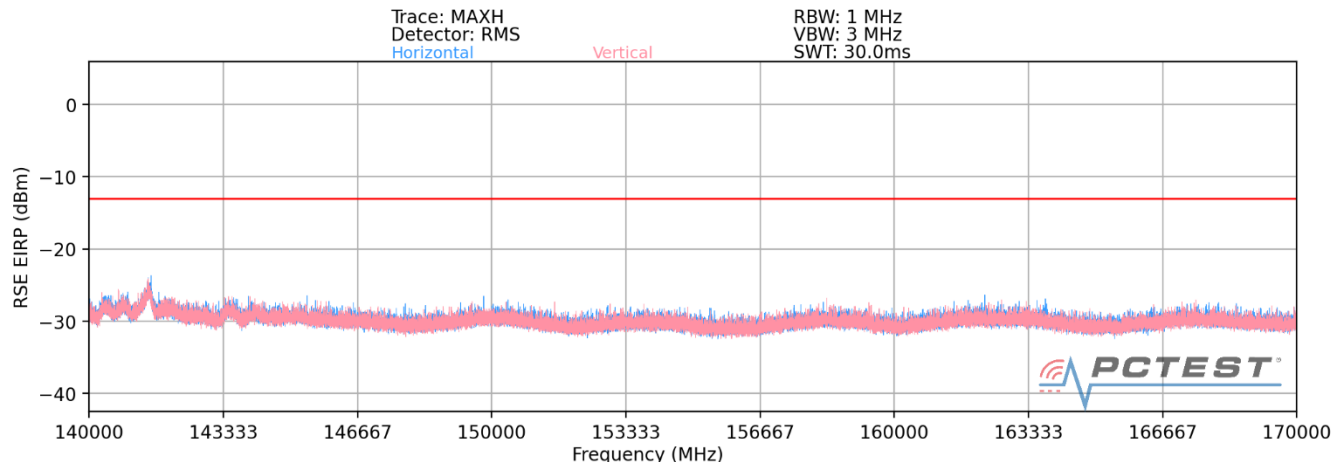

Plot 7-53. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
142122.35	Low	50	V	QPSK	V	-	-	-34.52	-13.00	-21.52
154001.28	Mid	50	V	QPSK	V	-	-	-33.65	-13.00	-20.65
159892.36	High	50	V	QPSK	V	-	-	-33.56	-13.00	-20.56


Table 7-45. Ant 1 - SISO -Spurious Emissions Table (140GHz - 170GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 85 of 152

170GHz - 200GHz

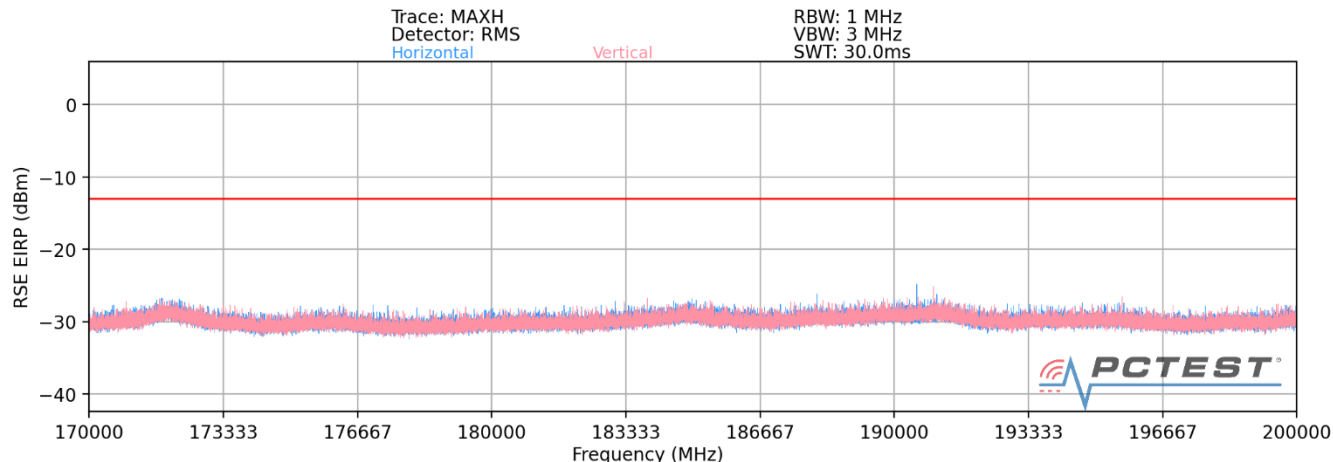

Plot 7-54. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
190872.30	Low	50	V	QPSK	V	-	-	-33.64	-13.00	-20.64
190873.41	Mid	50	V	QPSK	V	-	-	-32.47	-13.00	-19.47
184444.66	High	50	V	QPSK	V	-	-	-33.69	-13.00	-20.69

Table 7-46. Ant 1 - SISO -Spurious Emissions Table (170GHz - 200GHz)


Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 86 of 152

Band n260- Ant 2

30MHz - 1GHz

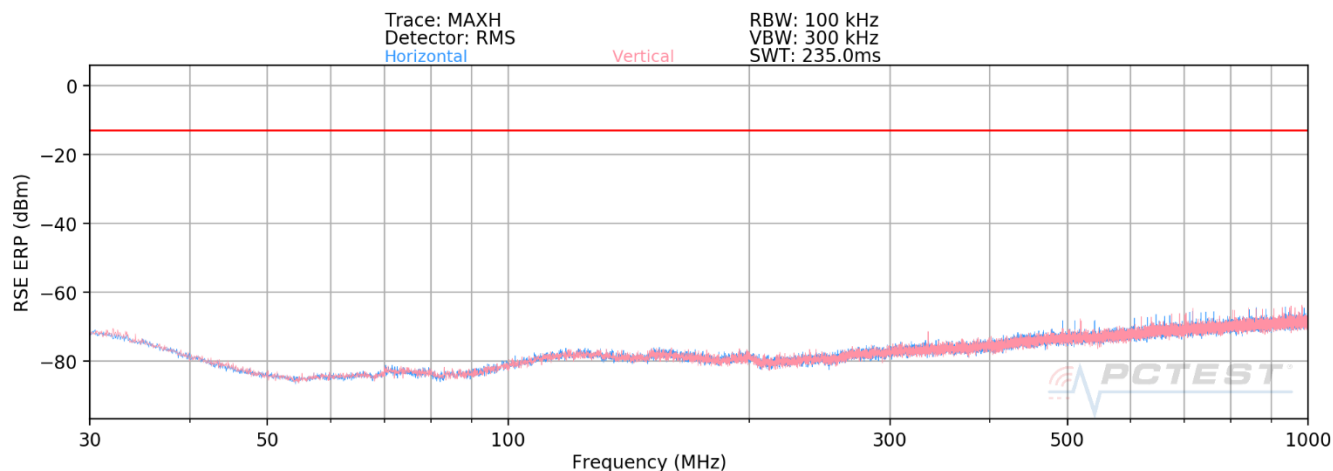

Plot 7-55. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
842.14	Low	50	H	QPSK	H	-	-	-70.42	-13.00	-57.42
556.24	Mid	50	H	QPSK	H	-	-	-72.01	-13.00	-59.01
891.67	High	50	H	QPSK	H	-	-	-70.41	-13.00	-57.41


Table 7-47. Ant 2 - SISO -Spurious Emissions Table (30MHz - 1GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 87 of 152

1GHz - 18GHz

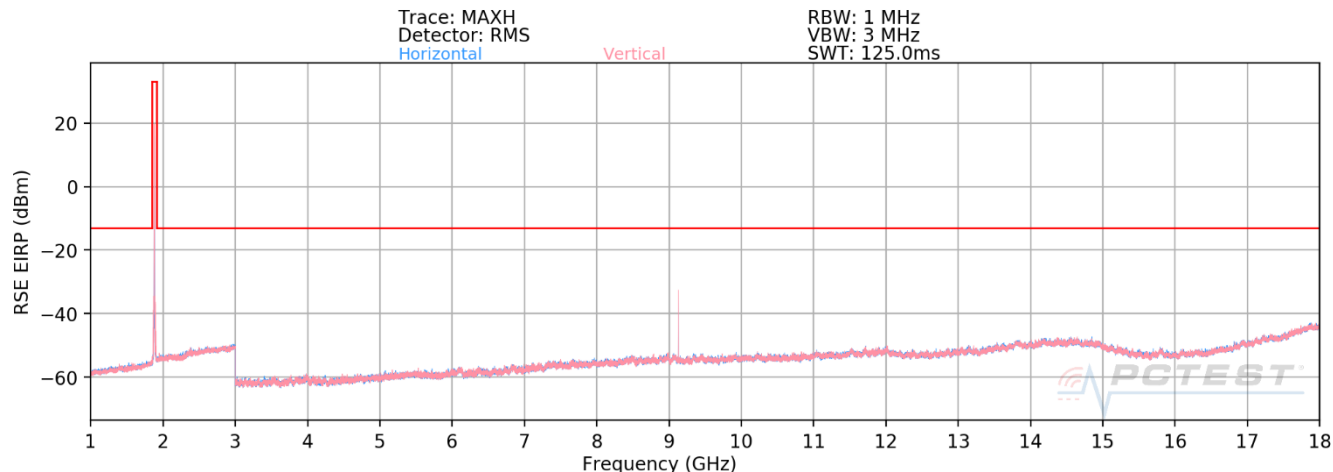

Plot 7-56. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8812.31	Low	50	H	QPSK	H	168	255	-45.40	-13.00	-32.40
9300.70	Mid	50	H	QPSK	H	196	222	-46.23	-13.00	-33.23
8971.76	High	50	H	QPSK	H	152	267	-45.27	-13.00	-32.27


Table 7-48. Ant 2 - SISO -Spurious Emissions Table (1GHz - 18GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 88 of 152

18GHz – 37GHz

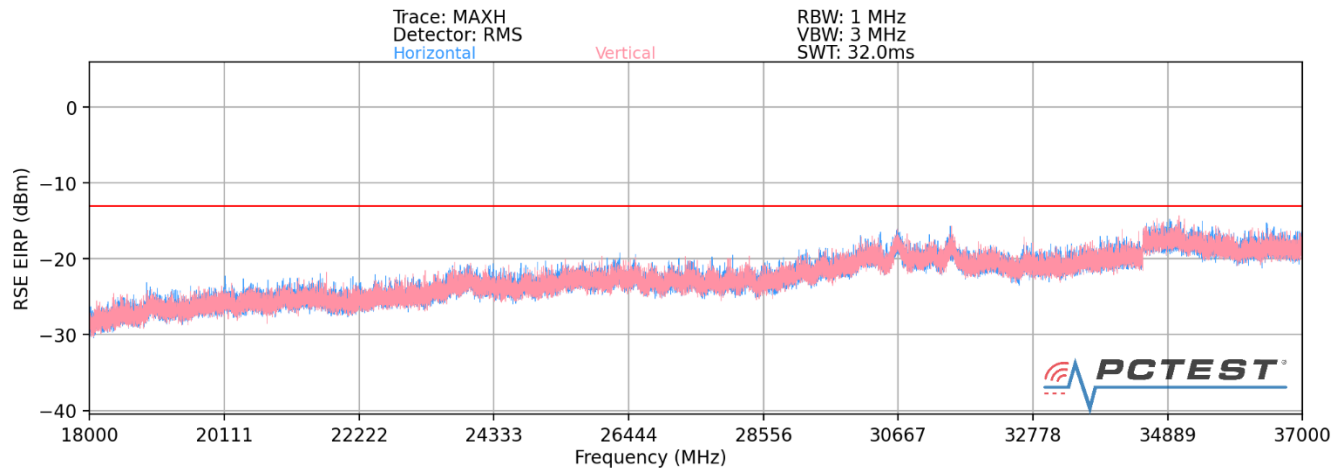

Plot 7-57. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36847.11	Low	50	H	QPSK	V	-	-	-32.11	-13.00	-19.11
36954.20	Mid	50	V	QPSK	V	-	-	-32.01	-13.00	-19.01
36870.60	High	50	V	QPSK	V	284	349	-30.16	-13.00	-17.16


Table 7-49. Ant 2 - SISO -Spurious Emissions Table (18GHz – 37GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 89 of 152

40GHz - 60GHz

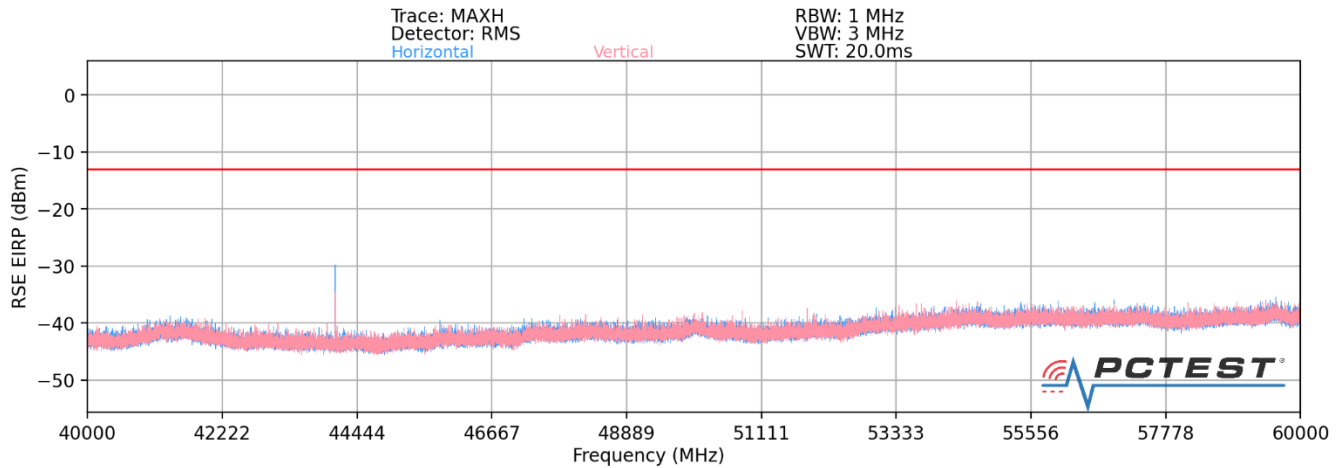

Plot 7-58. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42931.10	Low	50	V	QPSK	H	72	7	-33.67	-13.00	-20.67
44083.10	Mid	50	V	QPSK	H	72	356	-32.94	-13.00	-19.94
46233.45	High	50	V	QPSK	H	73	11	-36.27	-13.00	-23.27


Table 7-50. Ant 2 - SISO -Spurious Emissions Table (40GHz - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 90 of 152

60GHz - 90GHz

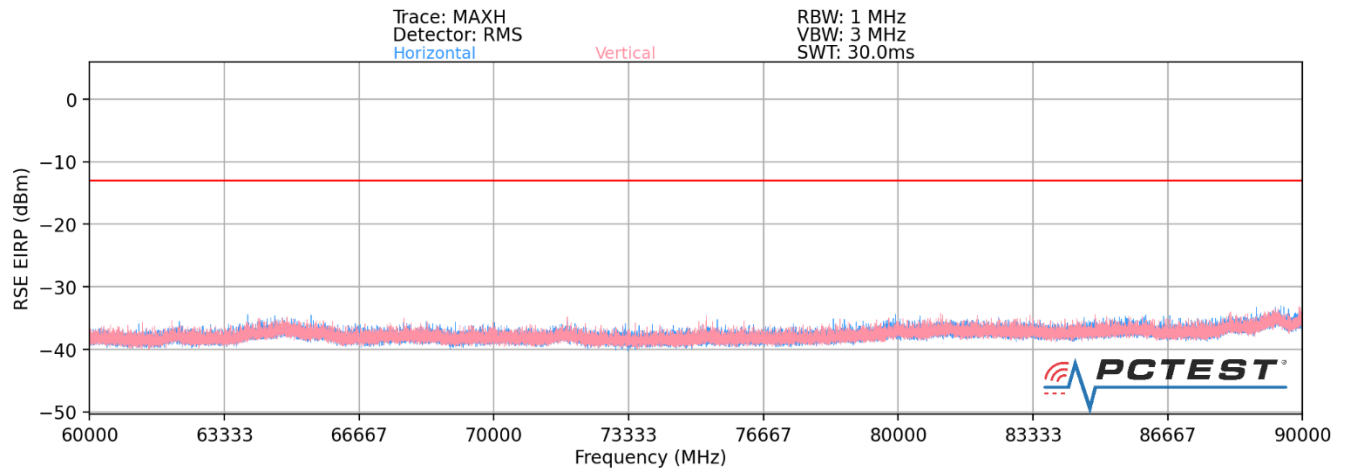

Plot 7-34. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
44082.92	Mid	50	V	QPSK	V	252	8	-37.20	-13.00	-24.20
46233.50	High	50	V	QPSK	V	253	11	-39.57	-13.00	-26.57


Table 7-51. Ant 2 - SISO -Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 91 of 152

90GHz - 140GHz

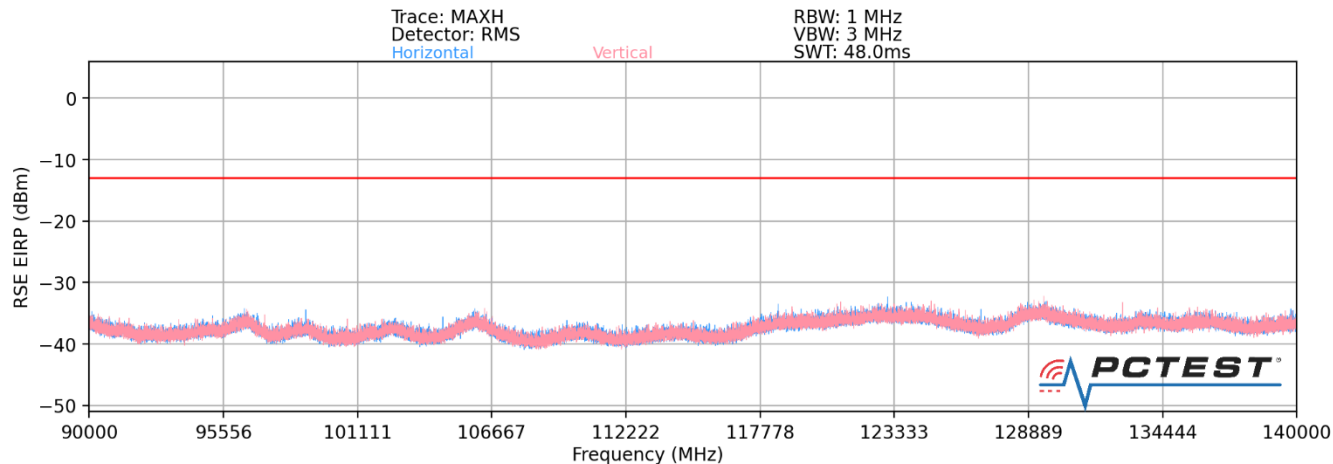

Plot 7-60. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111076.62	Low	50	V	QPSK	H	271	359	-37.64	-13.00	-24.64
115501.19	Mid	50	V	QPSK	H	277	1	-33.25	-13.00	-20.25
119926.89	High	50	V	QPSK	H	268	12	-38.08	-13.00	-25.08


Table 7-52. Ant2 - SISO -Spurious Emissions Table (90GHz - 140GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 92 of 152

140GHz - 170GHz

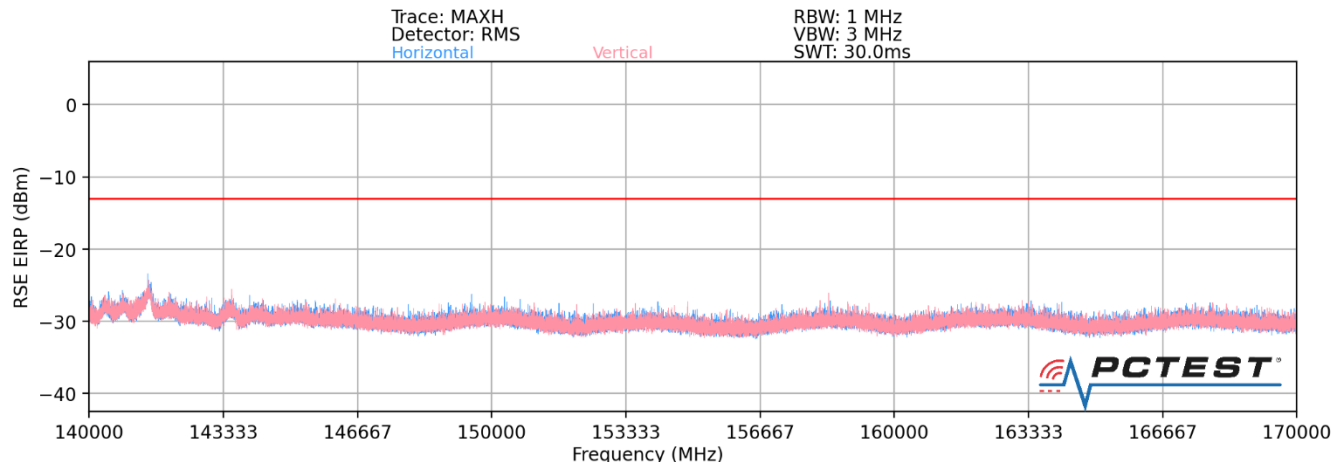

Plot 7-61. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
142052.60	Low	50	V	QPSK	H	-	-	-34.52	-13.00	-21.52
153998.24	Mid	50	V	QPSK	H	-	-	-34.65	-13.00	-21.65
159889.95	High	50	V	QPSK	H	-	-	-34.33	-13.00	-21.33


Table 7-53. Ant 2 - SISO -Spurious Emissions Table (140GHz - 170GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 93 of 152

170GHz - 200GHz

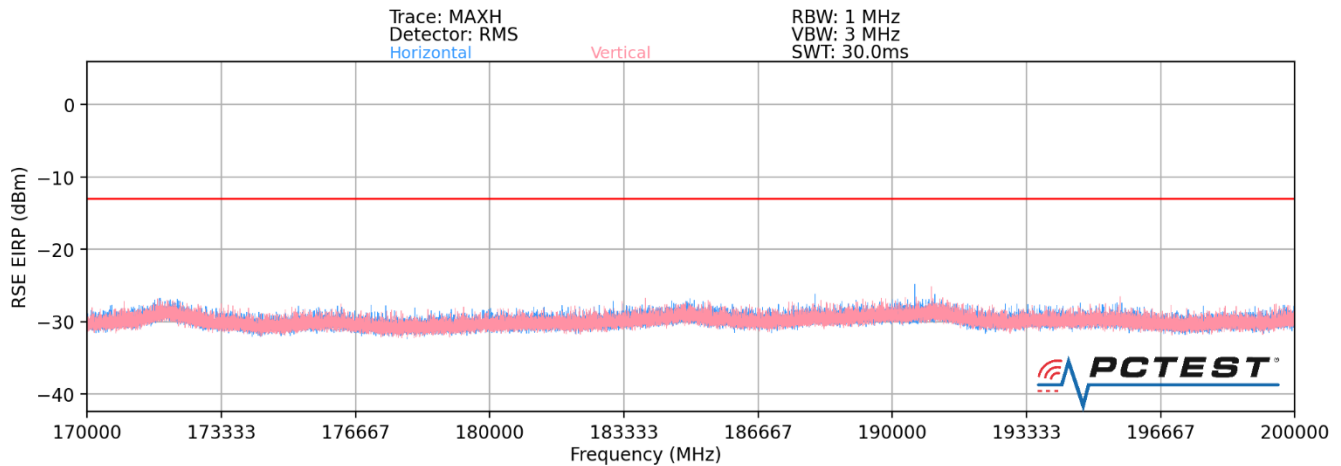

Plot 7-62. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
190873.10	Low	50	V	QPSK	H	-	-	-33.05	-13.00	-20.05
171829.57	Mid	50	V	QPSK	H	-	-	-33.14	-13.00	-20.14
184462.52	High	50	V	QPSK	H	-	-	-34.25	-13.00	-21.25

Table 7-54. Ant 2 - SISO -Spurious Emissions Table (170GHz - 200GHz)


Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 94 of 152

Band n260- Ant 3

30MHz - 1GHz

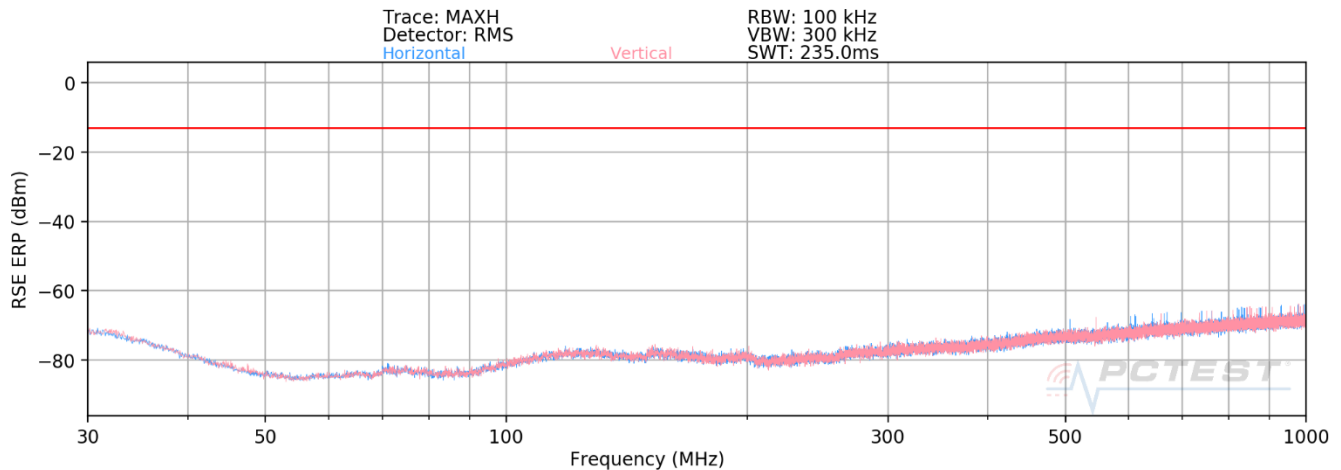

Plot 7-55. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
476.65	Low	50	H	QPSK	H	-	-	-71.42	-13.00	-58.42
657.22	Mid	50	H	QPSK	H	-	-	-71.68	-13.00	-58.68
928.34	High	50	H	QPSK	H	-	-	-71.14	-13.00	-58.14


Table 7-47. Ant 3 - SISO -Spurious Emissions Table (30MHz - 1GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 95 of 152

1GHz - 18GHz

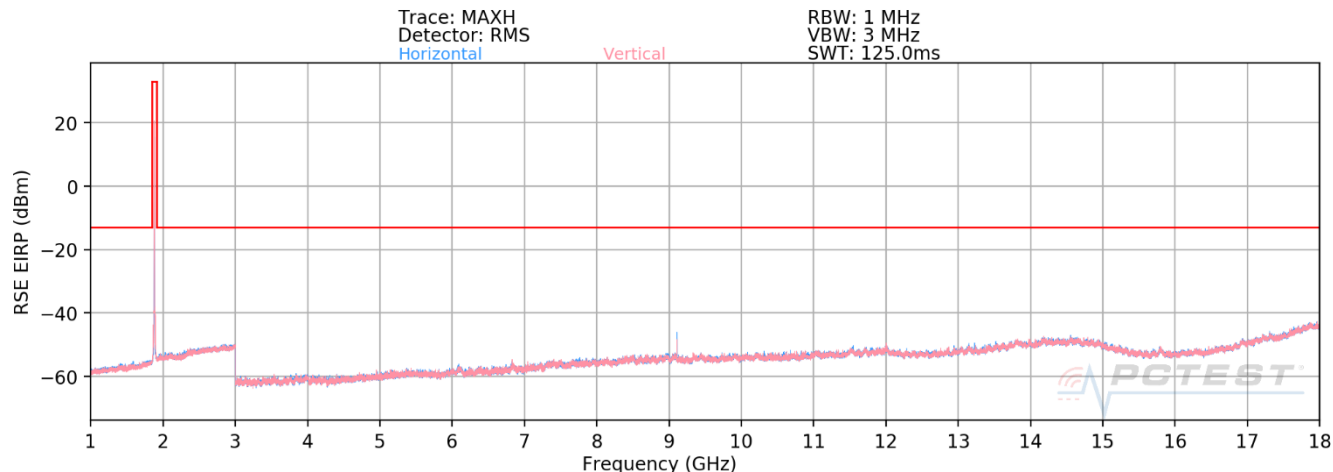

Plot 7-56. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8810.24	Low	50	H	QPSK	H	141	217	-44.24	-13.00	-31.24
9299.66	Mid	50	H	QPSK	H	174	226	-45.00	-13.00	-32.00
8970.45	High	50	H	QPSK	H	168	231	-46.20	-13.00	-33.20


Table 7-48. Ant 3 - SISO -Spurious Emissions Table (1GHz - 18GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 96 of 152

18GHz – 37GHz

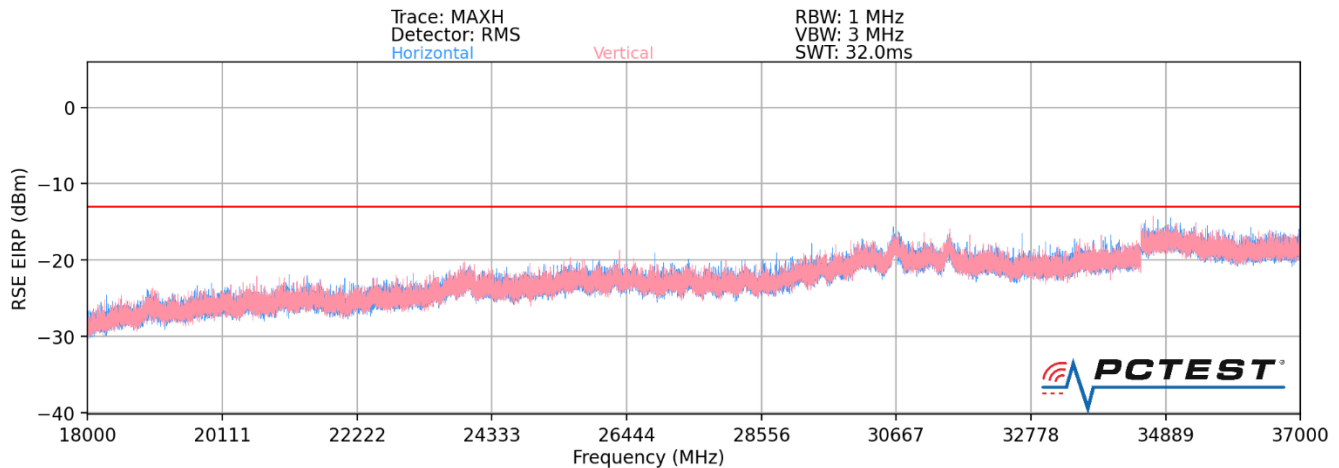

Plot 7-57. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36892.52	Low	50	V	QPSK	H	-	-	-32.82	-13.00	-19.82
36857.30	Mid	50	V	QPSK	H	-	-	-32.56	-13.00	-19.56
36469.33	High	50	V	QPSK	H	-	-	-33.01	-13.00	-20.01


Table 7-49. Ant 3 - SISO -Spurious Emissions Table (18GHz – 37GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 97 of 152

40GHz - 60GHz

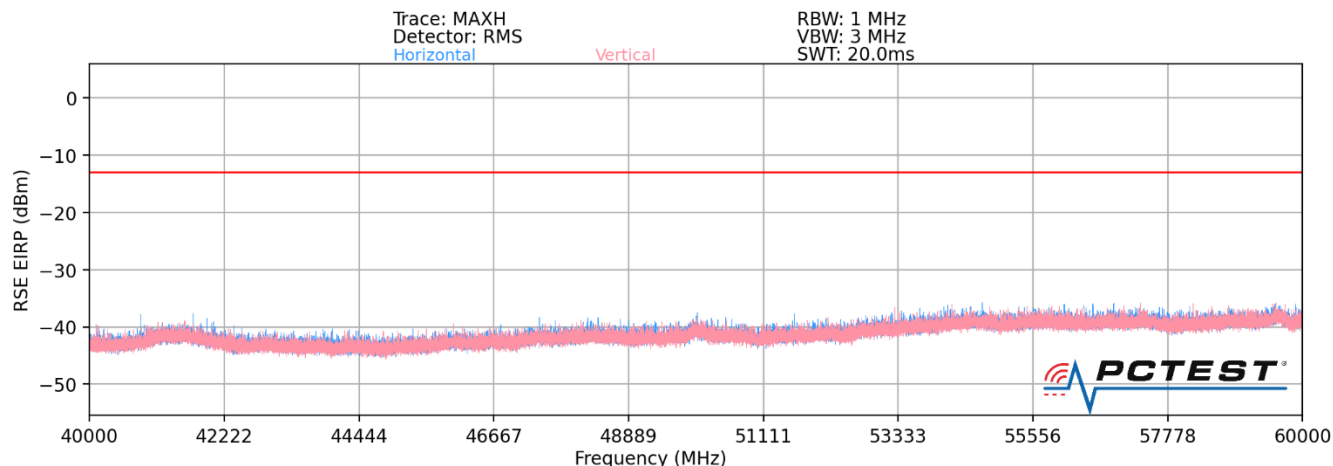

Plot 7-58. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42915.36	Low	50	V	QPSK	H	-	-	-43.72	-13.00	-30.72
44682.66	Mid	50	V	QPSK	H	-	-	-42.91	-13.00	-29.91
46148.54	High	50	V	QPSK	H	-	-	-43.25	-13.00	-30.25

Table 7-50. Ant 3 - SISO -Spurious Emissions Table (40GHz - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.


FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 98 of 152

© 2020 PCTEST

V1.0

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

60GHz - 90GHz

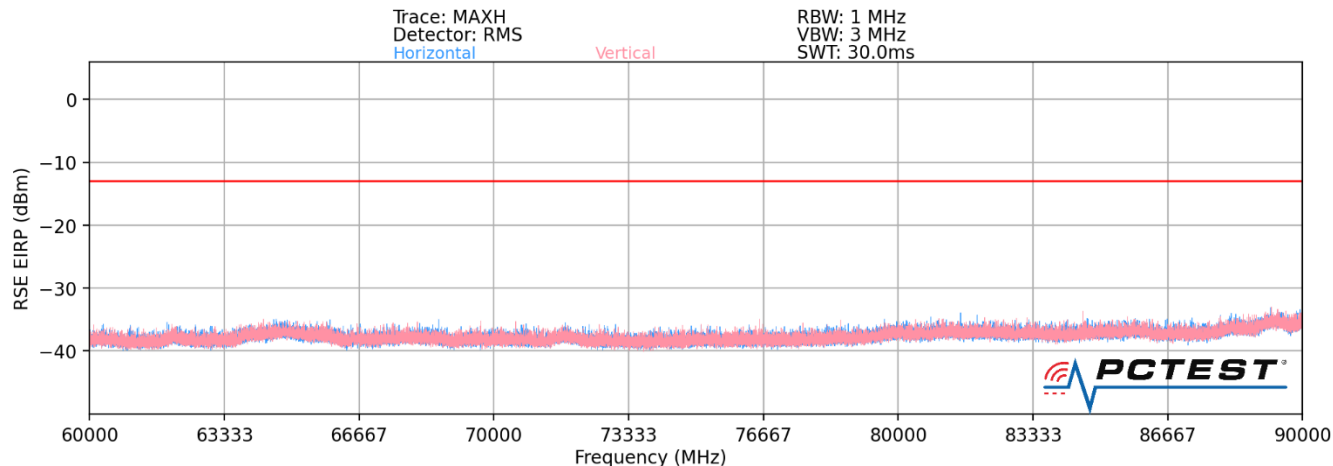

Plot 7-35. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74097.38	Low	50	V	QPSK	V	127	227	-33.53	-13.00	-20.53
76997.91	Mid	50	V	QPSK	V	172	358	-33.62	-13.00	-20.62
79899.98	High	50	V	QPSK	V	-	-	-40.68	-13.00	-27.68


Table 7-51. Ant 3 - SISO -Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 99 of 152

90GHz - 140GHz

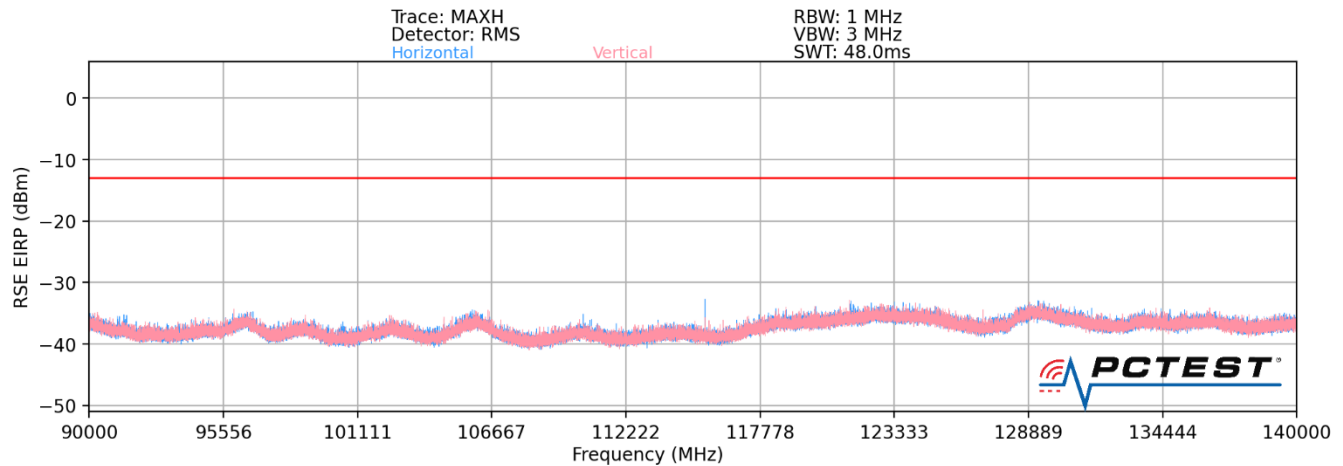

Plot 7-60. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111076.47	Low	50	V	QPSK	H	166	41	-34.29	-13.00	-21.29
115501.10	Mid	50	V	QPSK	H	158	55	-36.01	-13.00	-23.01
119926.20	High	50	V	QPSK	H	177	55	-37.81	-13.00	-24.81


Table 7-52. Ant3 - SISO -Spurious Emissions Table (90GHz - 140GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 100 of 152

140GHz - 170GHz

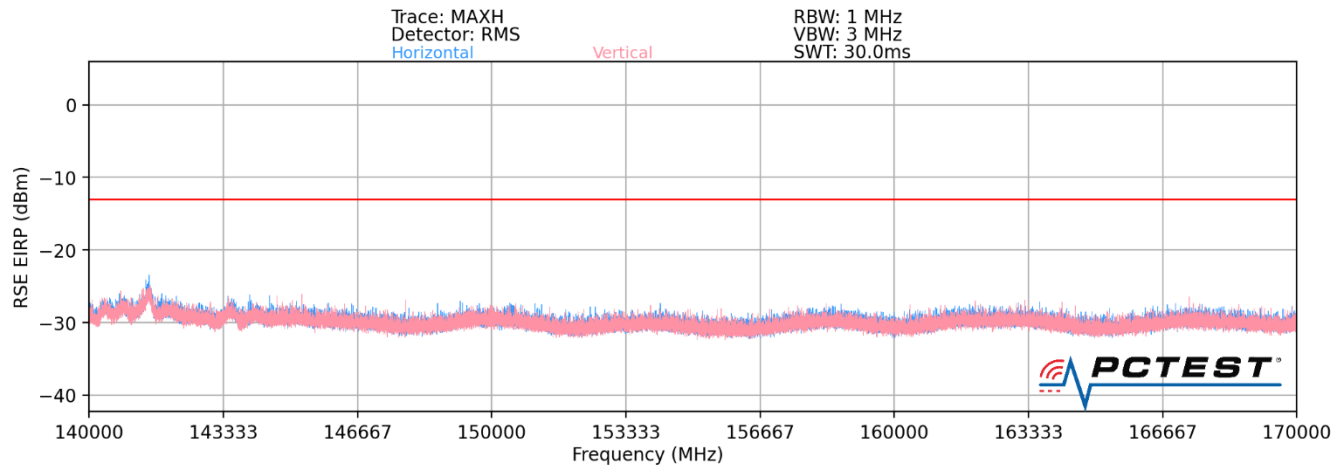

Plot 7-61. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
148102.56	Low	50	V	QPSK	H	-	-	-37.05	-13.00	-24.05
154003.78	Mid	50	V	QPSK	H	-	-	-36.62	-13.00	-23.62
159030.12	High	50	V	QPSK	H	-	-	-37.22	-13.00	-24.22


Table 7-53. Ant 3 - SISO -Spurious Emissions Table (140GHz - 170GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 101 of 152

170GHz - 200GHz

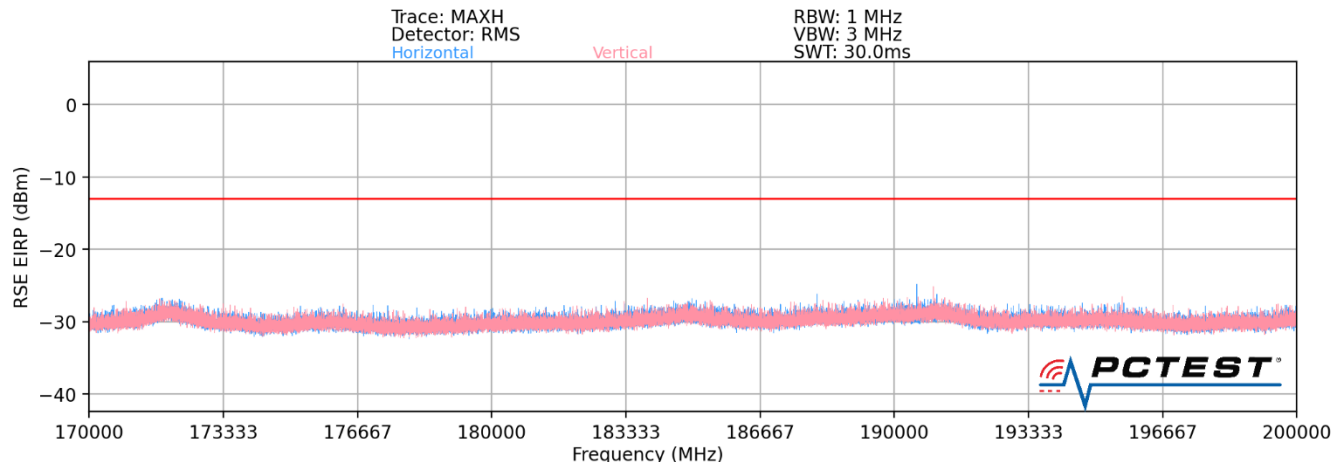

Plot 7-62. Ant 3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
192515.24	Low	50	H	QPSK	H	-	-	-36.30	-13.00	-23.30
195512.33	Mid	50	V	QPSK	H	-	-	-36.01	-13.00	-23.01
199878.55	High	50	V	QPSK	H	-	-	-36.44	-13.00	-23.44

Table 7-54. Ant 3 - SISO -Spurious Emissions Table (170GHz - 200GHz)


Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 102 of 152

Band n260- ANT 4

30MHz - 1GHz

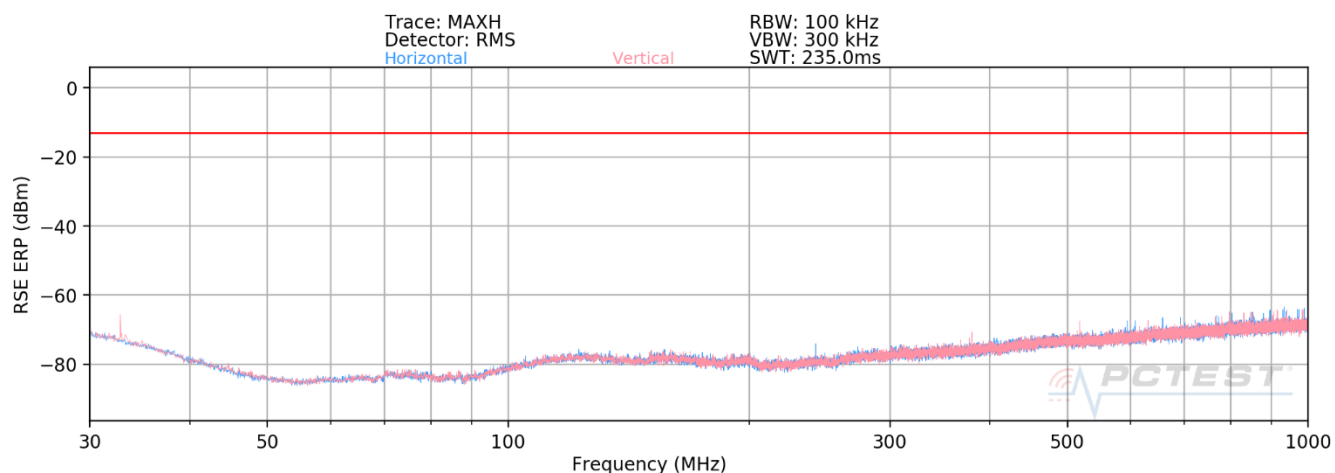

Plot 7-55. ANT 4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
476.65	Low	50	H	QPSK	H	-	-	-71.42	-13.00	-58.42
657.22	Mid	50	H	QPSK	H	-	-	-71.68	-13.00	-58.68
928.34	High	50	H	QPSK	H	-	-	-71.14	-13.00	-58.14


Table 7-55. ANT 4 - SISO -Spurious Emissions Table (30MHz - 1GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 103 of 152

1GHz - 18GHz

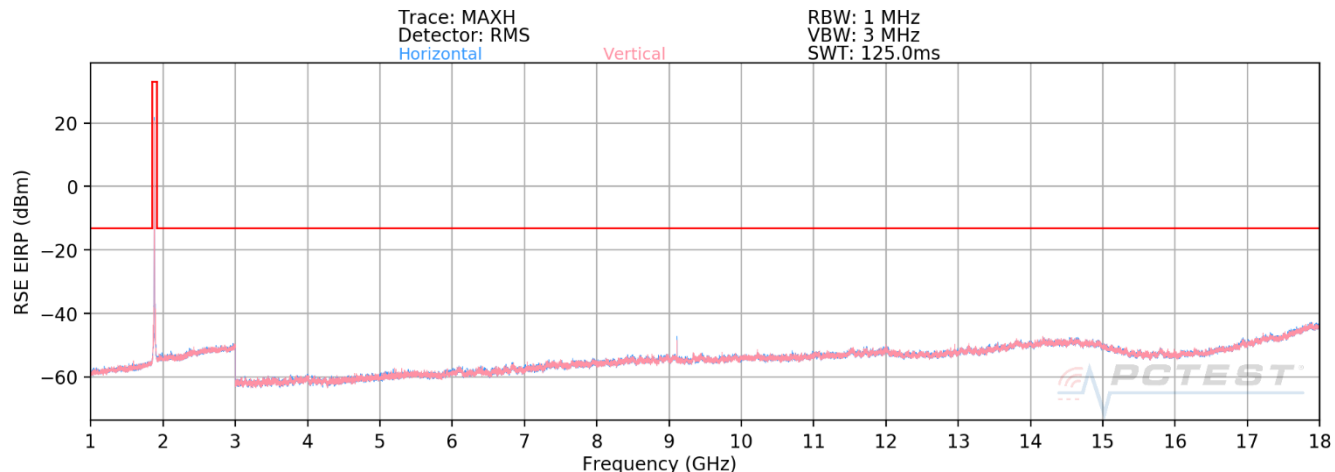

Plot 7-56. ANT 4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8810.24	Low	50	H	QPSK	H	320	217	-39.24	-13.00	-26.24
9299.66	Mid	50	H	QPSK	H	334	114	-40.03	-13.00	-27.03
8970.45	High	50	H	QPSK	H	325	100	-41.47	-13.00	-28.47


Table 7-56. ANT 4 - SISO -Spurious Emissions Table (1GHz - 18GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 104 of 152

18GHz – 37GHz

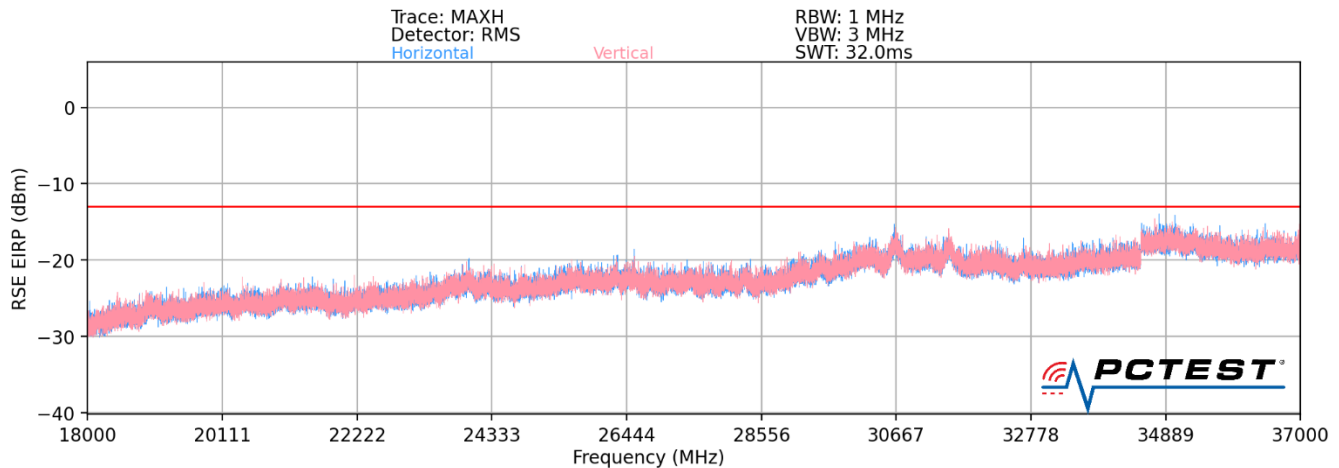

Plot 7-57. ANT 4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36930.74	Low	50	V	QPSK	V	-	-	-33.27	-13.00	-20.27
36901.36	Mid	50	V	QPSK	V	-	-	-33.13	-13.00	-20.13
36907.90	High	50	V	QPSK	V	-	-	-33.39	-13.00	-20.39

Table 7-57. ANT 4 - SISO -Spurious Emissions Table (18GHz – 37GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007070106-18-R2.PY7	Test Dates: 7/29 - 9/19/2020	EUT Type: Portable Handset		Page 105 of 152