

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

**Report Reference No.**.....: **MTEB24120099-R2**

**FCC ID**.....: **2A8MH-SOTA**

Compiled by

( position+printed name+signature) .: File administrators Alisa Luo




Supervised by

( position+printed name+signature) .: Test Engineer Sunny Deng



Approved by

( position+printed name+signature) .: Manager Yvette Zhou



Date of issue .....: **Dec.09,2024**

**Representative Laboratory Name.:** **Shenzhen Most Technology Service Co., Ltd.**

Address .....: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,  
Nanshan, Shenzhen, Guangdong, China.

**Applicant's name**.....: **Moxin (Huzhou) Tech. Co., LTD**

Address .....: C13, Deqing Geo-Information Town Innovation Park, Huzhou City,  
Zhejiang Prov., China.

**Test specification** .....

Standard.....: **FCC Part 15.247**

TRF Originator.....: Shenzhen Most Technology Service Co., Ltd.

**Shenzhen Most Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....

Trade Mark.....: KOKONI

Model/Type reference .....: SOTA

Listed Models .....: N/A

Modulation Type.....: b: DSSS  
g/n:OFDM

Operation Frequency.....: From 2412MHz to 2462MHz

Rating .....: 100-240VAC 50/60Hz

Hardware version .....: MX\_SOTA\_VA1.0

Software version .....: MX\_SOTA\_VB1.0

Result .....: **PASS**

# TEST REPORT

Equipment under Test : KOKONI 3D Printer

Model /Type : SOTA

Listed Models : N/A

Remark : N/A

Applicant : Moxin (Huzhou) Tech. Co., LTD

Address : C13, Deqing Geo-Information Town Innovation Park, Huzhou City, Zhejiang Prov., China.

Manufacturer : Moxin (Huzhou) Tech. Co., LTD

Address : C13, Deqing Geo-Information Town Innovation Park, Huzhou City, Zhejiang Prov., China.

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

# Contents

<b>1 REVISION HISTORY .....</b>	<b>4</b>
<b>2 TEST STANDARDS.....</b>	<b>5</b>
<b>3 SUMMARY.....</b>	<b>6</b>
3.1 General Remarks .....	6
3.2 Product Description .....	6
3.3 Equipment Under Test .....	6
3.4 Short description of the Equipment under Test (EUT) .....	6
3.5 EUT operation mode .....	6
3.6 Block Diagram of Test Setup .....	7
3.7 Test Item (Equipment Under Test) Description* .....	7
3.8 Auxiliary Equipment (AE) Description .....	7
3.9 Antenna Information* .....	7
3.10 Related Submittal(s) / Grant (s).....	7
3.11 Modifications .....	7
3.12 EUT configuration .....	8
<b>4 TEST ENVIRONMENT .....</b>	<b>9</b>
4.1 Address of the test laboratory .....	9
4.2 Test Facility.....	9
4.3 Environmental conditions .....	9
4.4 Test Description .....	10
4.5 Statement of the measurement uncertainty .....	10
4.6 Equipments Used during the Test .....	11
<b>5 TEST CONDITIONS AND RESULTS.....</b>	<b>12</b>
5.1 AC Power Conducted Emission.....	12
5.2 Radiated Emission .....	15
5.3 Maximum Conducted Output Power .....	22
5.4 Power Spectral Density.....	23
5.5 6dB Bandwidth .....	24
5.6 Out-of-band Emissions .....	25
5.7 Duty Cycle Information .....	26
5.8 Antenna Requirement .....	27
<b>6 TEST SETUP PHOTOS OF THE EUT .....</b>	<b>28</b>
<b>7 PHOTOS OF THE EUT .....</b>	<b>29</b>
APPENDIX I. Duty Cycle.....	30
APPENDIX II. Power Spectral Density .....	37
APPENDIX III. Conducted Peak Output Power .....	39
APPENDIX IV. 99% Bandwidth .....	40
APPENDIX V. 6dB Bandwidth.....	42
APPENDIX VI. Conducted Out Of Band Emission.....	44

## 1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2024.12.09	Initial Issue	Alisa Luo

## **2 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 v05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

### 3 SUMMARY

#### 3.1 General Remarks

Date of receipt of test sample	:	2024.12.01
Testing commenced on	:	2024.12.02
Testing concluded on	:	2024.12.09

#### 3.2 Product Description

Product Name:	KOKONI 3D Printer
Model/Type reference:	SOTA
Power Supply:	AC 120V/60Hz
Testing sample ID:	MTYP06934
<b>WIFI :</b>	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)
Modulation:	b: DSSS , g/n: OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	FPC Antenna
Antenna gain:	2dBi

#### 3.3 Equipment Under Test

##### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input checked="" type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input type="radio"/> Other (specified in blank below)	

#### 3.4 Short description of the Equipment under Test (EUT)

This is a KOKONI 3D Printer For more details, refer to the user's manual of the EUT.


#### 3.5 EUT operation mode

The application provider specific test software(AT command) to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

### 3.6 Block Diagram of Test Setup

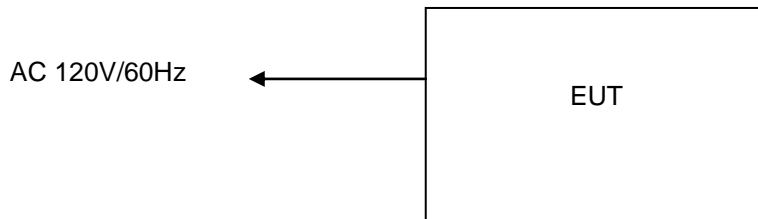

### 3.7 Test Item (Equipment Under Test) Description\*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A	/	/	/	/	/
EUT B	/	/	/	/	/

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

### 3.8 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1	/	/	/	/
AE 2	/	/	/	/

### 3.9 Antenna Information\*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	FPC Antenna	2.4 – 2.5 GHz	---	2dBi
Antenna 2					

\*: declared by the applicant.

### 3.10 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:2A8MH-SOTA** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### 3.11 Modifications

No modifications were implemented to meet testing criteria.

### 3.12 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - Supplied by the lab

<input checked="" type="radio"/>	ADAPTER	M/N:	/
<input type="radio"/>		Manufacturer:	/



## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

#### **Shenzhen Most Technology Service Co., Ltd.**

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.  
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

### 4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC-Registration No.: 0031192610**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### **A2LA-Lab Cert. No.: 6343.01**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 4.3 Environmental conditions

Radiated Emission:

Temperature:	24 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

#### 4.4 Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

#### Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9KHz~1GHz& Radiated Emission 1GHz~10 <sup>th</sup> Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(40MHz)/OFDM	6.5Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	6.5Mbps	3/9

#### 4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)
6dB Bandwidth	/	5%	(1)
Maximum Conducted Output Power	/	0.80dB	(1)
Spurious RF Conducted Emission	/	1.6dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.6 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.
1.	L.I.S.N.	R&S	ENV216	100093	/	2024/03/15
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	/	2024/03/15
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2024/03/15
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2024/03/15
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2024/03/15
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2024/08/15
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2024/03/15
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2024/03/15
9	Horn antenna	R&S	OBH100400	26999002	/	2024/03/15
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2024/03/15
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2024/03/15
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2024/03/15
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2024/03/15
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	/	2024/03/15
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2024/03/15
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2024/03/15
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2024/03/15
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2024/03/15
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2024/03/15
20	Power meter	R&S	NRVS	100444	/	2024/03/15

Note: The Cal.Interval was one year.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 AC Power Conducted Emission

#### TEST CONFIGURATION

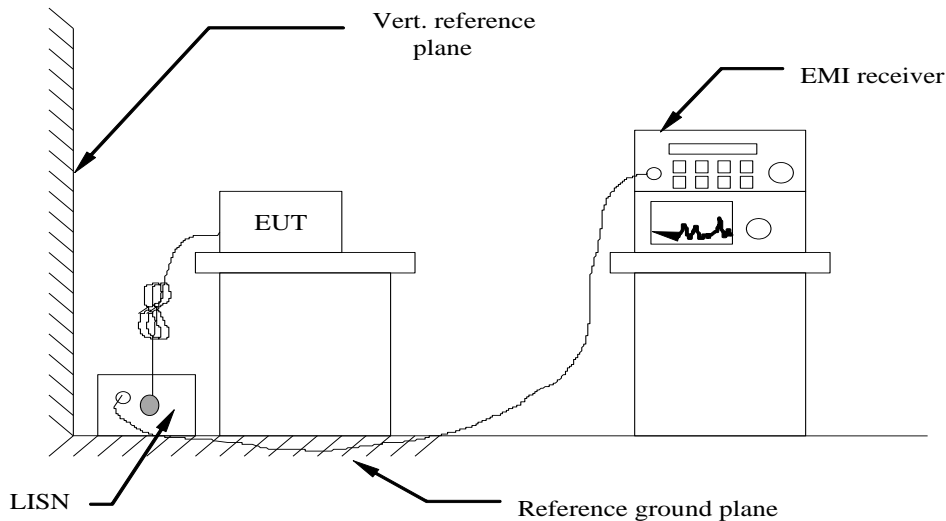

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

Remark:

1.WIFI modes were test at 802.11b/802.11g/802.11n (H20) /802.11n (H40) (Low, Middle, and High channel); only the worst result of 802.11b Middle Channel was reported as below:

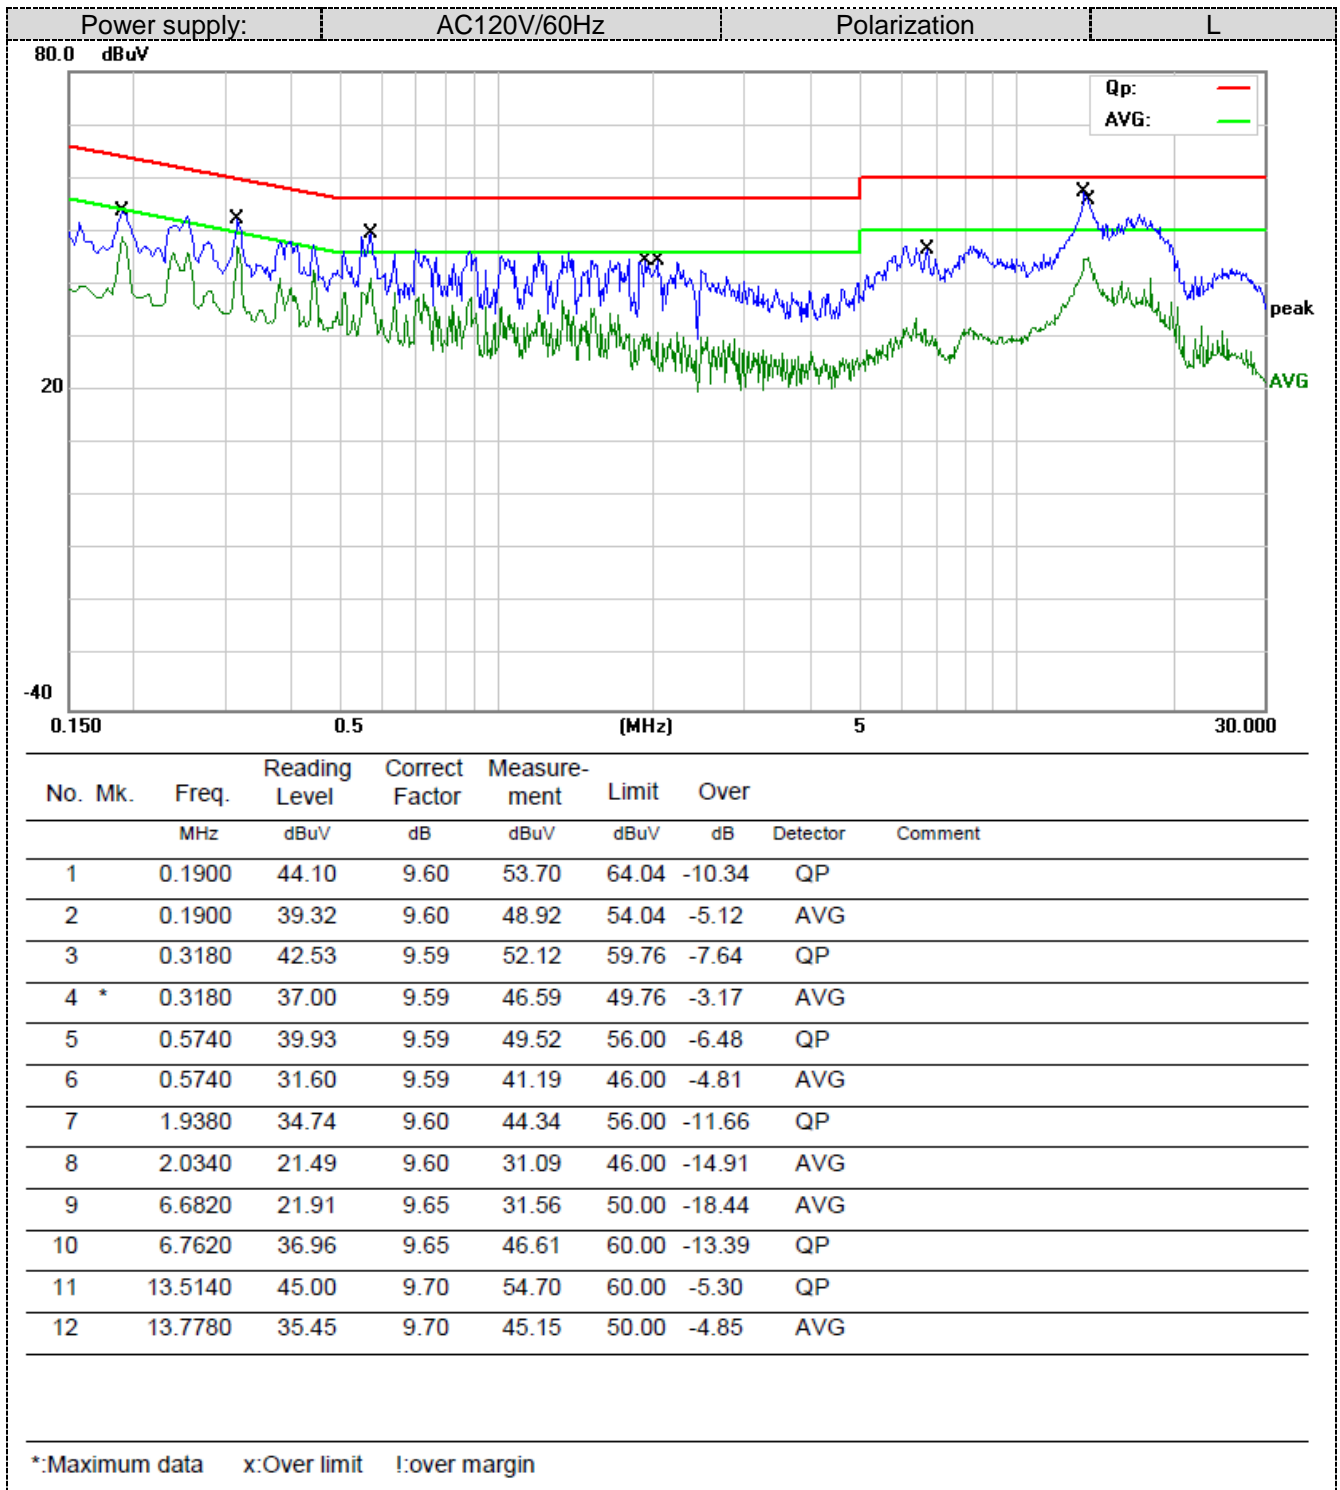


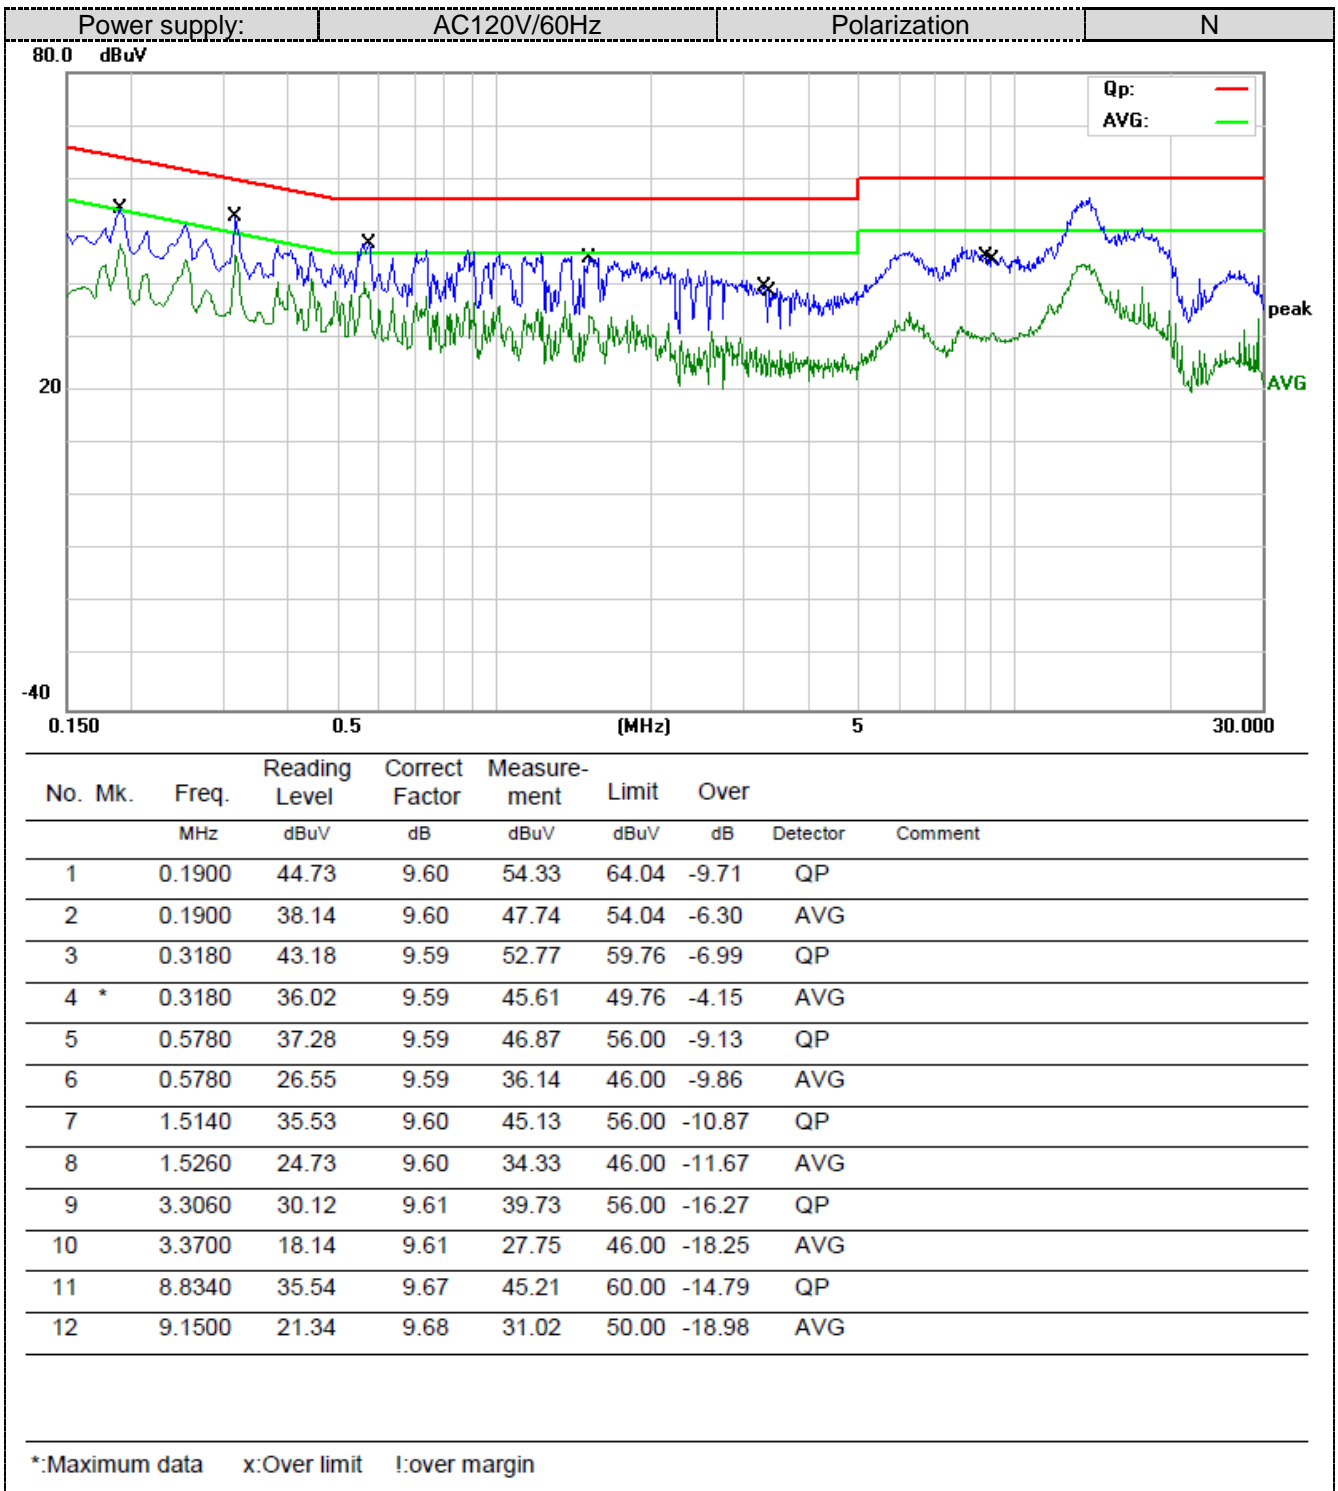


## 5.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

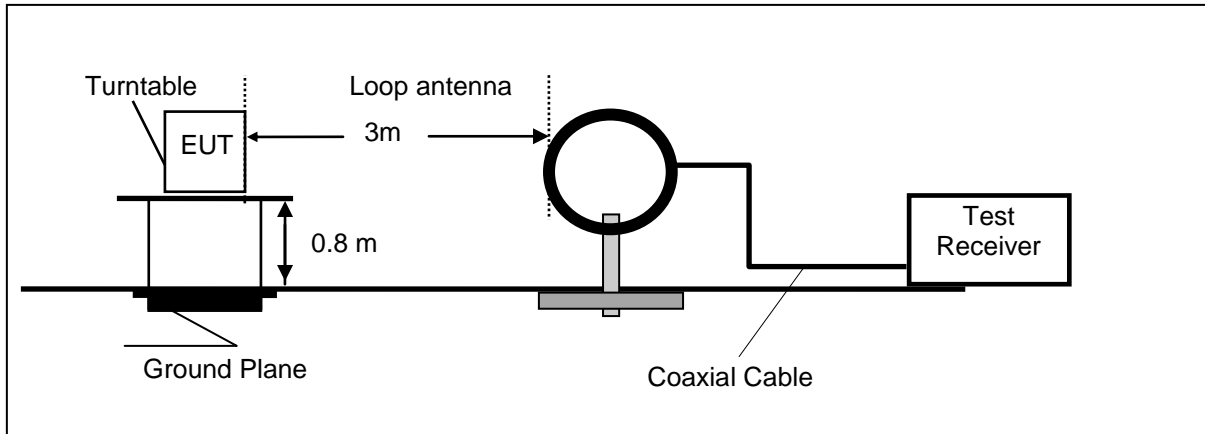

Frequency range 30MHz – 1000MHz

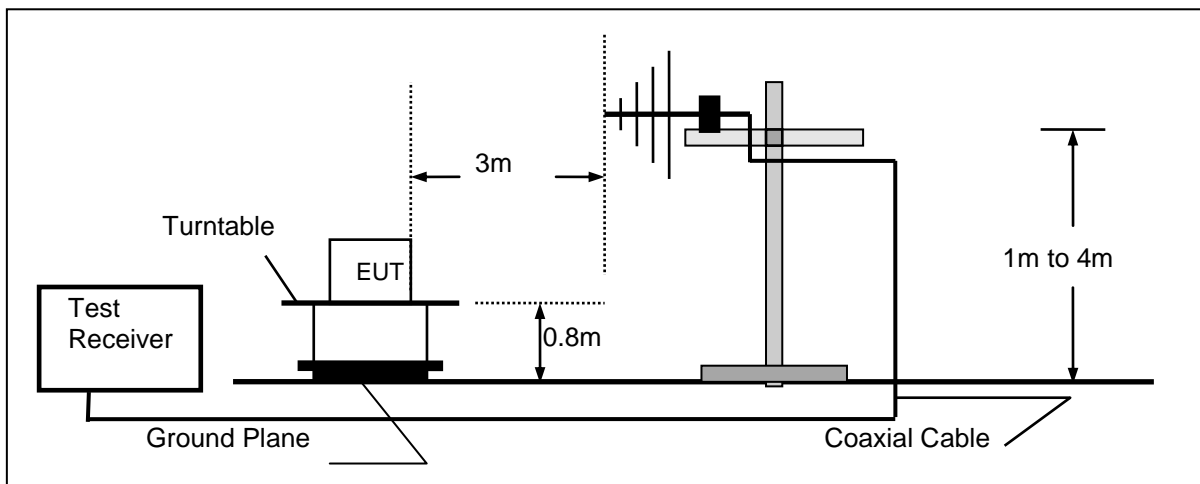

Frequency range above 1GHz-25GHz

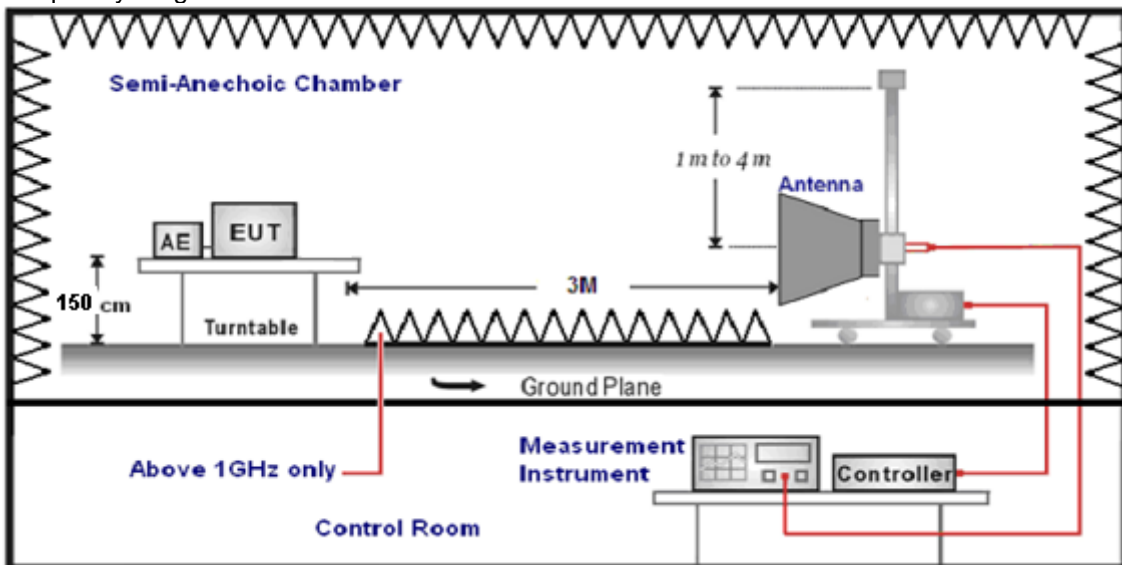

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF +CL-AG$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500




**TEST RESULTS**

Remark:


1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
4. Remark: Result=Reading value+Factor

**For 30MHz-1GHz**

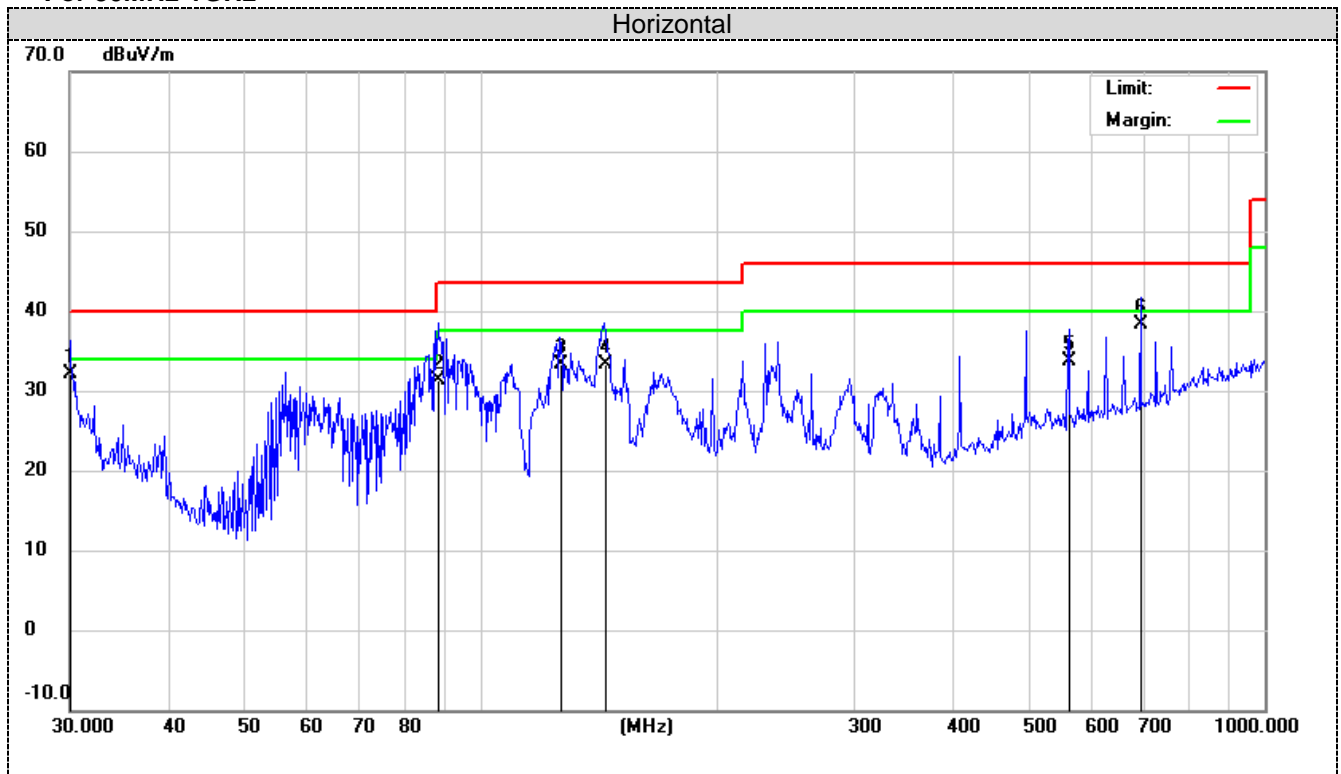

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.0000	11.24	20.90	32.14	40.00	-7.86	200	70	
2		88.3421	21.36	9.93	31.29	43.50	-12.21	200	150	
3		126.3286	17.24	16.04	33.28	43.50	-10.22	200	200	
4		143.8295	16.38	16.90	33.28	43.50	-10.22	200	270	
5		562.6624	10.39	23.39	33.78	46.00	-12.22	200	300	
6	*	694.4174	13.27	25.03	38.30	46.00	-7.70	200	320	

\*:Maximum data    x:Over limit    !:over margin

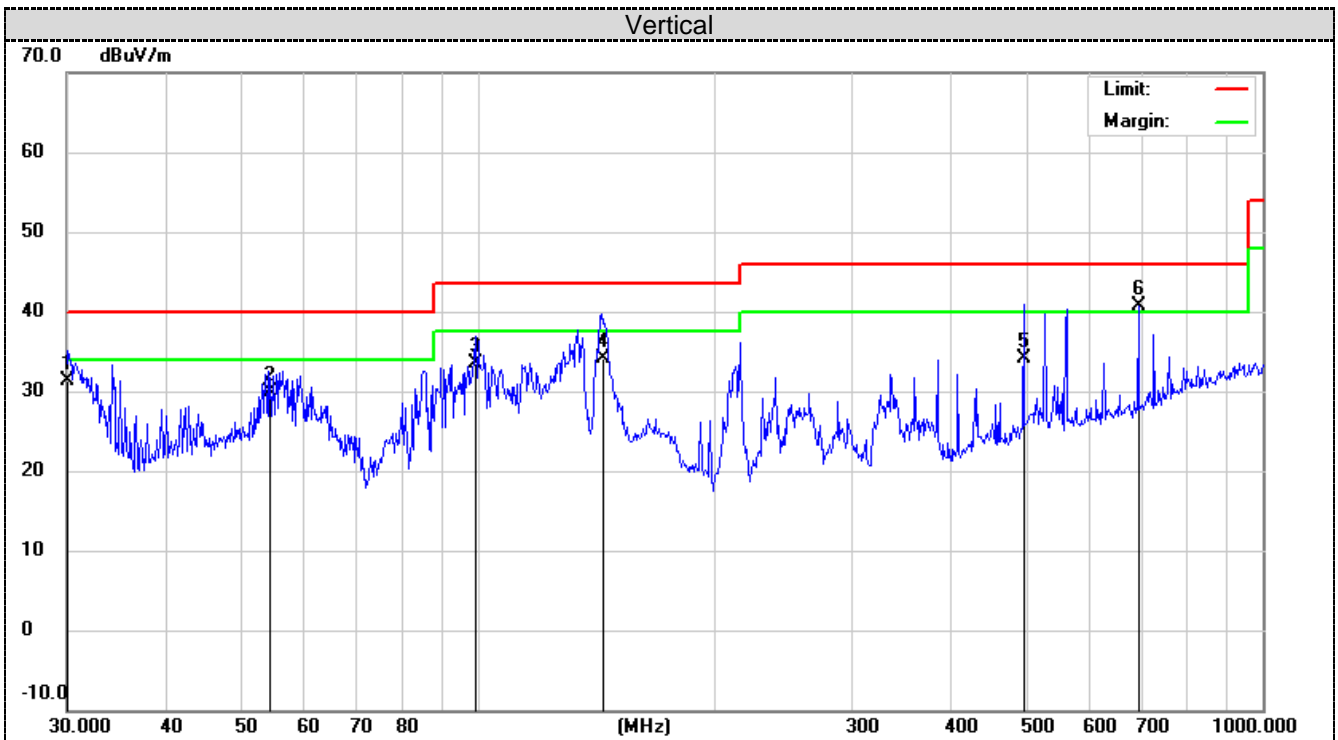

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		30.0000	10.33	20.90	31.23	40.00	-8.77	QP	100	20	
2		54.2610	21.58	8.31	29.89	40.00	-10.11	QP	100	140	
3		99.5281	20.16	13.43	33.59	43.50	-9.91	QP	100	150	
4		143.8295	17.25	16.90	34.15	43.50	-9.35	QP	100	300	
5		495.9344	11.69	22.48	34.17	46.00	-11.83	QP	100	310	
6	*	694.4174	15.60	25.03	40.63	46.00	-5.37	QP	100	330	

\*:Maximum data    x:Over limit    !:over margin

**For 1GHz to 25GHz**

Note: 802.11b/802.11g/802.11n (H20) /802.11n (H40) all have been tested, only worse case 802.11b mode is reported

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>802.11b-2412MHz</b>									
V	4824	54.91	30.28	7.01	36.5	55.7	74	18.3	PK
V	4824	43.17	30.28	7.01	36.5	43.96	54	10.04	AV
H	4824	56.79	30.28	7.01	36.5	57.58	74	16.42	PK
H	4824	42.19	30.28	7.01	36.5	42.98	54	11.02	AV
V	7236	40.63	36.59	8.91	35.3	50.83	74	23.17	PK
V	7236	30.68	36.59	8.91	35.3	40.88	54	13.12	AV
H	7236	40.19	36.59	8.91	35.3	50.39	74	23.61	PK
H	7236	30.4	36.59	8.91	35.3	40.6	54	13.4	AV
<b>802.11b -2437MHz</b>									
V	4874	53.46	30.36	7.62	36.5	54.94	74	19.06	PK
V	4874	42.82	30.36	7.62	36.5	44.3	54	9.7	AV
H	4874	56.91	30.36	7.62	36.5	58.39	74	15.61	PK
H	4874	44.59	30.36	7.62	36.5	46.07	54	7.93	AV
V	7311	44.9	36.61	8.84	35.3	55.05	74	18.95	PK
V	7311	29.98	36.61	8.84	35.3	40.13	54	13.87	AV
H	7311	40.35	36.61	8.84	35.3	50.5	74	23.5	PK
H	7311	30.4	36.61	8.84	35.3	40.55	54	13.45	AV
<b>802.11b -2462MHz</b>									
V	4924	55.32	30.43	7.94	36.2	57.49	74	16.51	PK
V	4924	44.59	30.43	7.94	36.2	46.76	54	7.24	AV
H	4924	53.21	30.43	7.94	36.2	55.38	74	18.62	PK
H	4924	43.67	30.43	7.94	36.2	45.84	54	8.16	AV
V	7386	40.84	36.78	8.45	35.3	50.77	74	23.23	PK
V	7386	30.57	36.78	8.45	35.3	40.5	54	13.5	AV
H	7386	39.47	36.78	8.45	35.3	49.4	74	24.6	PK
H	7386	30.73	36.78	8.45	35.3	40.66	54	13.34	AV

**Note:**

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

**Results of Band Edges Test (Radiated)**

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>802.11b -2412MHz</b>									
V	2390	55.8	27.49	3.32	36.22	50.39	74	23.61	PK
V	2390	46.06	27.49	3.32	36.22	40.65	54	13.35	AV
H	2390	58.12	27.49	3.32	36.22	52.71	74	21.29	PK
H	2390	43.36	27.49	3.32	36.22	37.95	54	16.05	AV
V	2400	57.64	27.55	3.41	36.22	52.38	74	21.62	PK
V	2400	45.67	27.55	3.41	36.22	40.41	54	13.59	AV
H	2400	58.52	27.55	3.41	36.22	53.26	74	20.74	PK
H	2400	43.31	27.55	3.41	36.22	38.05	54	15.95	AV
<b>802.11b -2462MHz</b>									
V	2483.5	59.97	27.45	3.38	36.34	54.46	74	19.54	PK
V	2483.5	44.09	27.45	3.38	36.34	38.58	54	15.42	AV
H	2483.5	59.91	27.45	3.38	36.34	54.4	74	19.6	PK
H	2483.5	43.24	27.45	3.38	36.34	37.73	54	16.27	AV
V	2500	55.34	27.41	3.47	36.35	49.87	74	24.13	PK
V	2500	45.52	27.41	3.47	36.35	40.05	54	13.95	AV
H	2500	58.21	27.41	3.47	36.35	52.74	74	21.26	PK
H	2500	45.9	27.41	3.47	36.35	40.43	54	13.57	AV

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>802.11g -2412MHz</b>									
V	2390	56.34	27.49	3.32	36.22	50.93	74	23.07	PK
V	2390	44.09	27.49	3.32	36.22	38.68	54	15.32	AV
H	2390	56.06	27.49	3.32	36.22	50.65	74	23.35	PK
H	2390	45.58	27.49	3.32	36.22	40.17	54	13.83	AV
V	2400	55.52	27.55	3.41	36.22	50.26	74	23.74	PK
V	2400	45.84	27.55	3.41	36.22	40.58	54	13.42	AV
H	2400	57.57	27.55	3.41	36.22	52.31	74	21.69	PK
H	2400	46.97	27.55	3.41	36.22	41.71	54	12.29	AV
<b>802.11g -2462MHz</b>									
V	2483.5	58.69	27.45	3.38	36.34	53.18	74	20.82	PK
V	2483.5	45.44	27.45	3.38	36.34	39.93	54	14.07	AV
H	2483.5	56.77	27.45	3.38	36.34	51.26	74	22.74	PK
H	2483.5	44.92	27.45	3.38	36.34	39.41	54	14.59	AV
V	2500	56.76	27.41	3.47	36.35	51.29	74	22.71	PK
V	2500	46.46	27.41	3.47	36.35	40.99	54	13.01	AV
H	2500	59.72	27.41	3.47	36.35	54.25	74	19.75	PK
H	2500	46.83	27.41	3.47	36.35	41.36	54	12.64	AV

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>802.11n(HT20) -2412MHz</b>									
V	2390	56.33	27.49	3.32	36.22	50.92	74	23.08	PK
V	2390	47.96	27.49	3.32	36.22	42.55	54	11.45	AV
H	2390	57.96	27.49	3.32	36.22	52.55	74	21.45	PK
H	2390	44.04	27.49	3.32	36.22	38.63	54	15.37	AV
V	2400	56.94	27.55	3.41	36.22	51.68	74	22.32	PK
V	2400	45.48	27.55	3.41	36.22	40.22	54	13.78	AV
H	2400	59.68	27.55	3.41	36.22	54.42	74	19.58	PK
H	2400	43.1	27.55	3.41	36.22	37.84	54	16.16	AV
<b>802.11n(HT20) -2462MHz</b>									
V	2483.5	56.15	27.45	3.38	36.34	50.64	74	23.36	PK
V	2483.5	44.4	27.45	3.38	36.34	38.89	54	15.11	AV
H	2483.5	55.15	27.45	3.38	36.34	49.64	74	24.36	PK
H	2483.5	45.07	27.45	3.38	36.34	39.56	54	14.44	AV
V	2500	55.88	27.41	3.47	36.35	50.41	74	23.59	PK
V	2500	43.73	27.41	3.47	36.35	38.26	54	15.74	AV
H	2500	59.38	27.41	3.47	36.35	53.91	74	20.09	PK
H	2500	46.27	27.41	3.47	36.35	40.8	54	13.2	AV

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>802.11n(HT40) -2422MHz</b>									
V	2390	56.03	27.49	3.32	36.22	50.62	74	23.38	PK
V	2390	44.8	27.49	3.32	36.22	39.39	54	14.61	AV
H	2390	57.41	27.49	3.32	36.22	52	74	22	PK
H	2390	44.67	27.49	3.32	36.22	39.26	54	14.74	AV
V	2400	59.04	27.55	3.41	36.22	53.78	74	20.22	PK
V	2400	46.77	27.55	3.41	36.22	41.51	54	12.49	AV
H	2400	57.65	27.55	3.41	36.22	52.39	74	21.61	PK
H	2400	43.66	27.55	3.41	36.22	38.4	54	15.6	AV
<b>802.11n(HT40) -2452MHz</b>									
V	2483.5	56.74	27.45	3.38	36.34	51.23	74	22.77	PK
V	2483.5	47.59	27.45	3.38	36.34	42.08	54	11.92	AV
H	2483.5	57.55	27.45	3.38	36.34	52.04	74	21.96	PK
H	2483.5	46	27.45	3.38	36.34	40.49	54	13.51	AV
V	2500	58.58	27.41	3.47	36.35	53.11	74	20.89	PK
V	2500	45.17	27.41	3.47	36.35	39.7	54	14.3	AV
H	2500	56.35	27.41	3.47	36.35	50.88	74	23.12	PK
H	2500	44.52	27.41	3.47	36.35	39.05	54	14.95	AV

## Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

### 5.3 Maximum Conducted Output Power


#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

#### Test Configuration



#### Test Results

See Appendix III

## 5.4 Power Spectral Density


### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq$  3 kHz.
3. Set the VBW  $\geq$  3 $\times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

### Test Configuration



### Test Results

See Appendix II

## 5.5 6dB Bandwidth


### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### Test Configuration



### Test Results

See Appendix V



## 5.6 Out-of-band Emissions


### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

### Test Configuration



### Test Results

See Appendix VI

## 5.7 Duty Cycle Information

See Appendix I

## 5.8 Antenna Requirement

### Standard Applicable

**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

**FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**



(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### Test Result:

The directional gains of antenna used for transmitting is 2dBi, and the antenna is and FPC Antenna and no consideration of replacement. Please see EUT photo for details.

Results: Compliance.

## 6 Test Setup Photos of the EUT

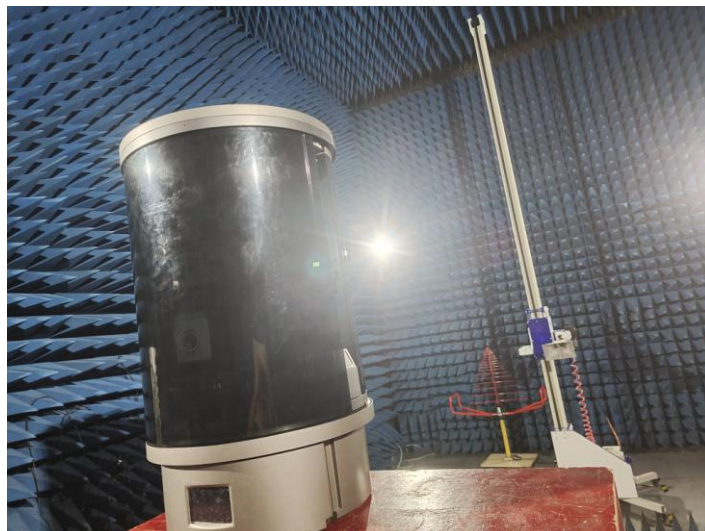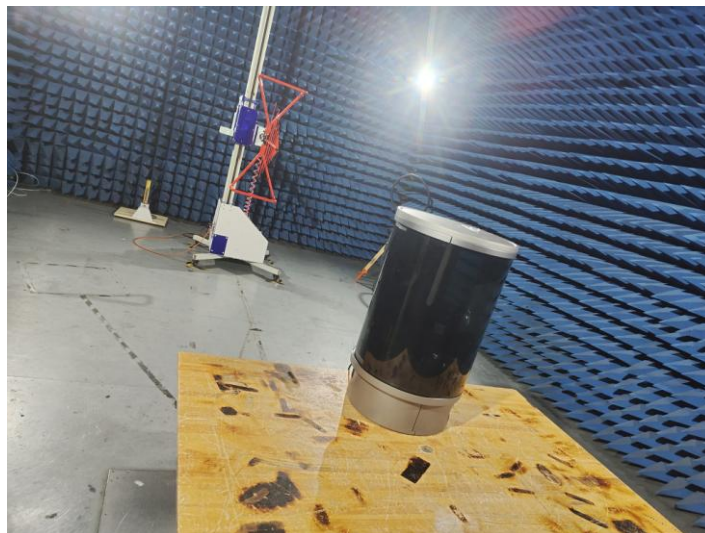

## **7 Photos of the EUT**


See related photo report.


## APPENDIX I. Duty Cycle

### Test Result


Mode	Data rates	Channel	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
IEEE 802.11b	11	1	1	0.937	0.966	96.99	0.9699	0.1327
		6		0.937	0.966	97.01	0.9701	0.1318
		11		0.937	0.966	96.98	0.9698	0.1332
IEEE 802.11g	54	1		0.177	0.302	58.60	0.5860	2.321
		6		0.177	0.374	47.33	0.4733	3.2486
		11		0.177	0.293	60.42	0.6042	2.1882
IEEE 802.11n_20	MCS 7	1		0.165	0.299	55.12	0.5512	2.5869
		6		0.165	0.299	55.15	0.5515	2.5845
		11		0.165	0.299	55.22	0.5522	2.579
IEEE 802.11n_40	MCS 7	3		0.101	0.297	33.93	0.3393	4.6942
		6		0.101	0.298	33.97	0.3397	4.689
		9	0.101	0.298	33.91	0.3391	4.6967	

### Test Graphs

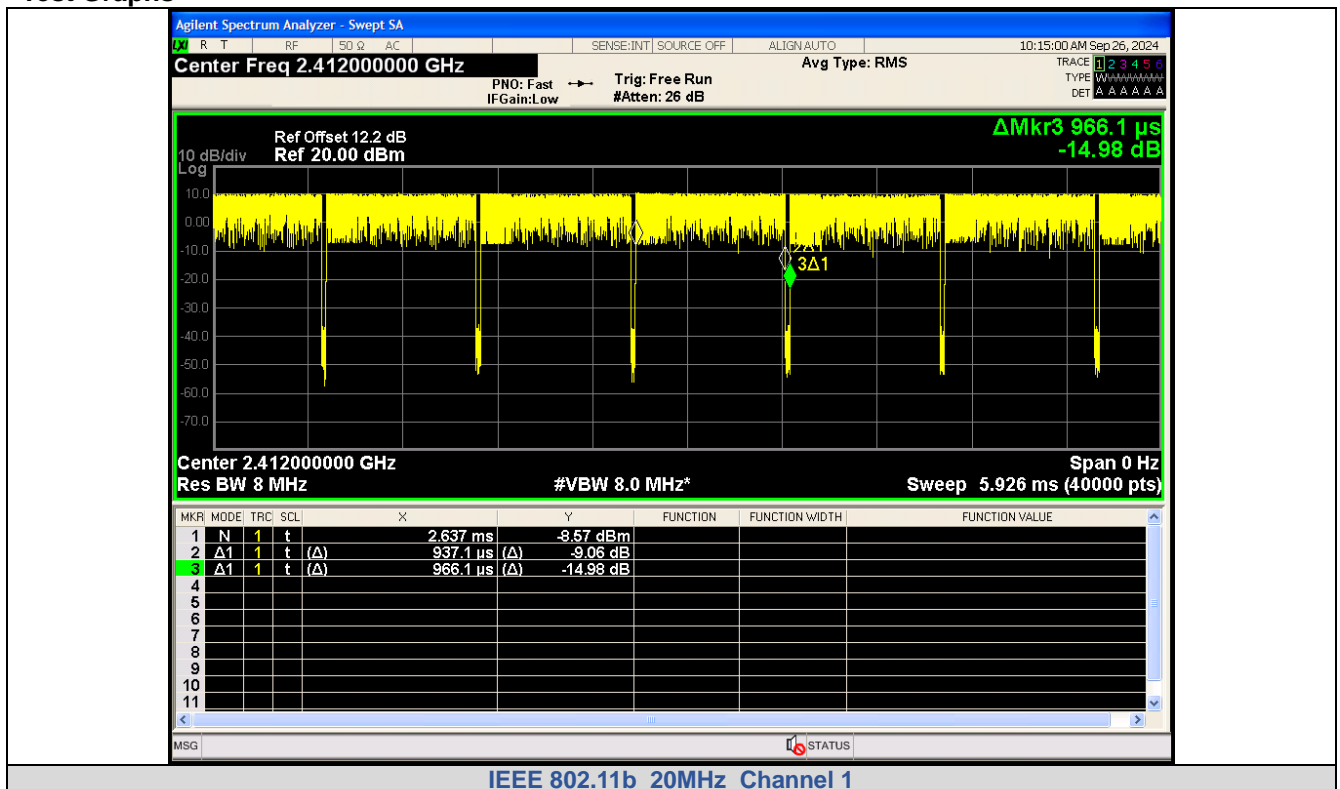


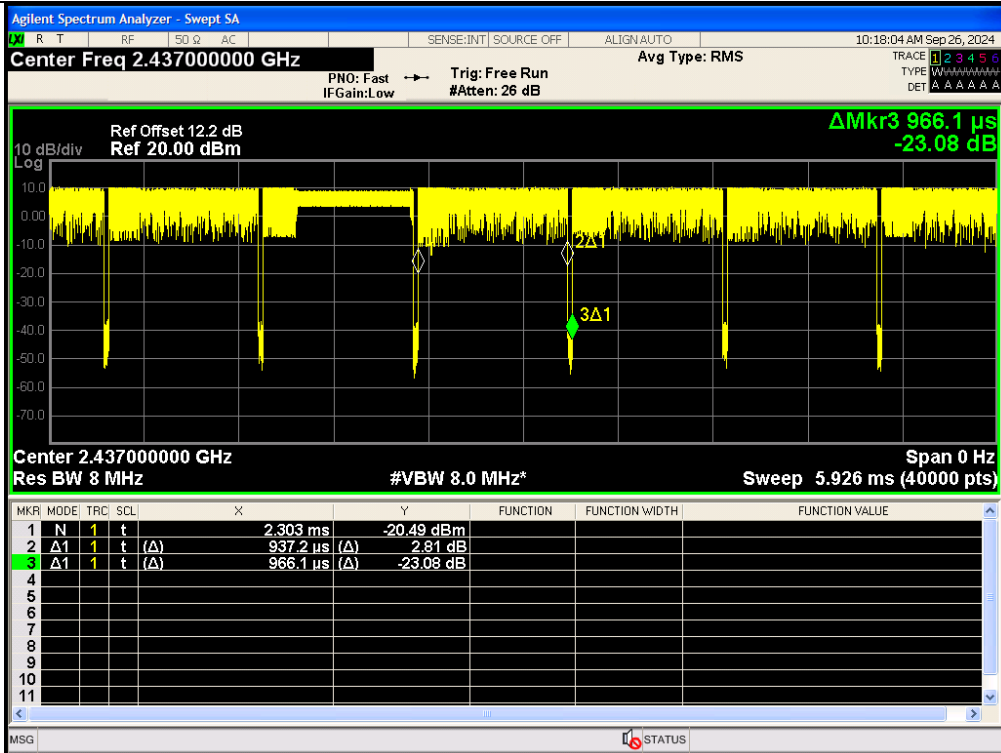


IEEE 802.11b\_20MHz\_Channel 6

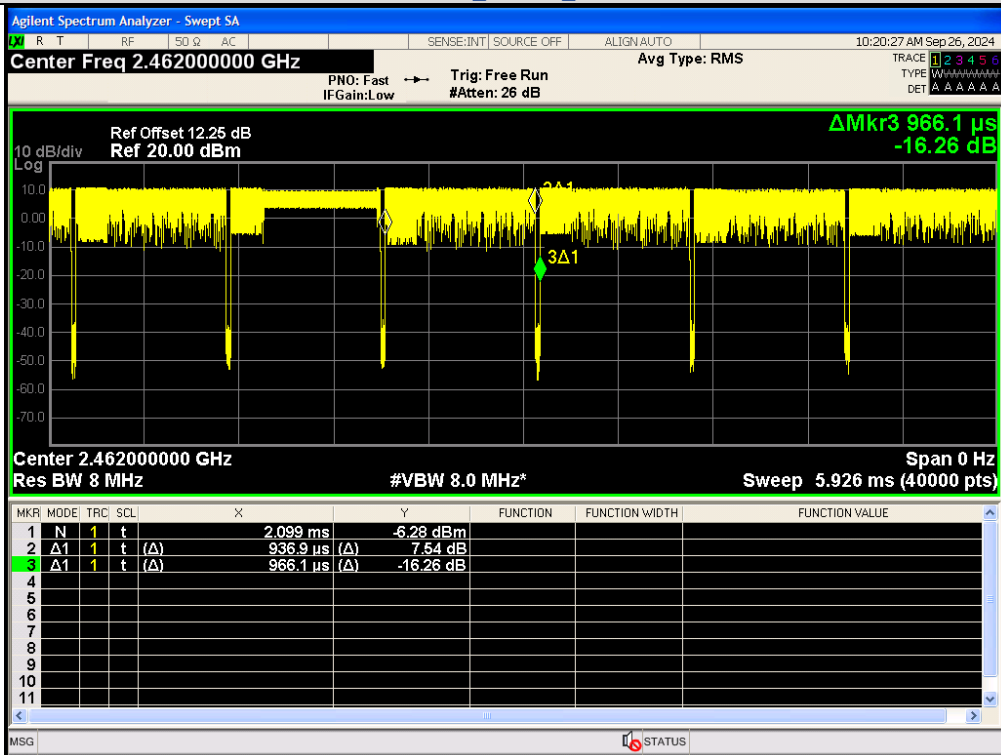

IEEE 802.11b\_20MHz\_Channel 11

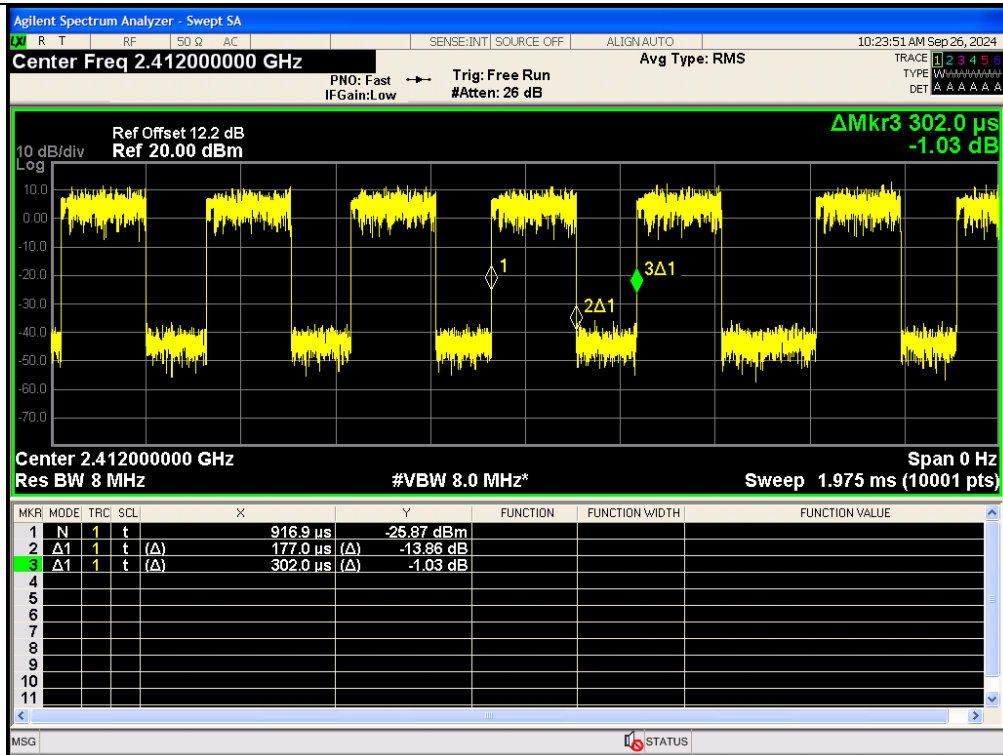


IEEE 802.11g\_20MHz\_Channel 1

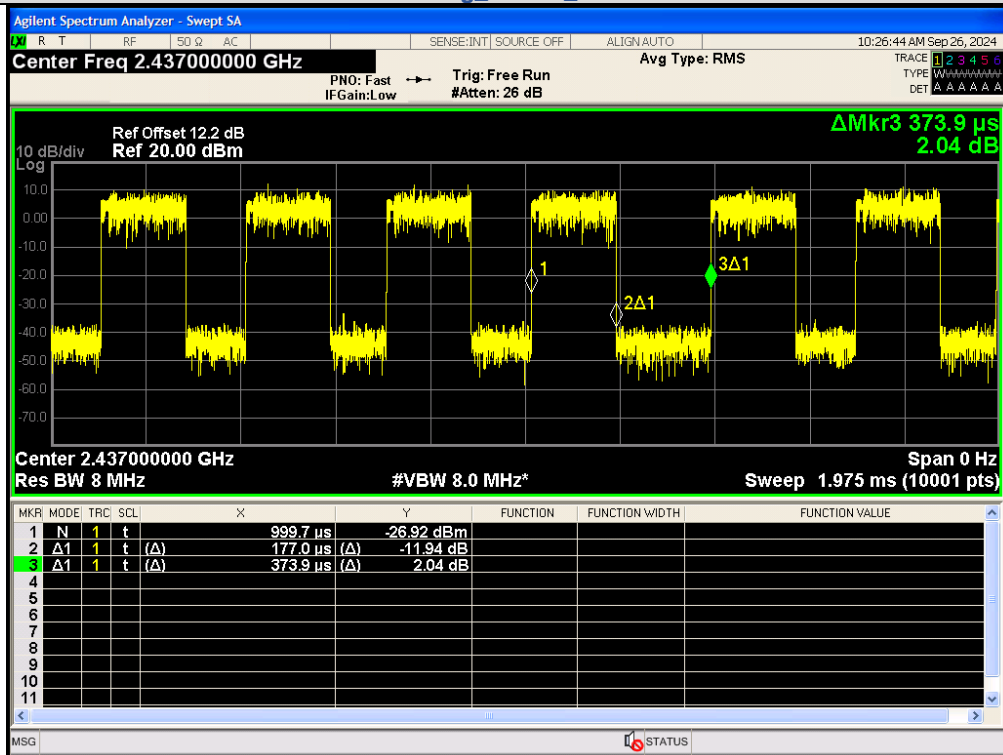


IEEE 802.11g\_20MHz\_Channel 6




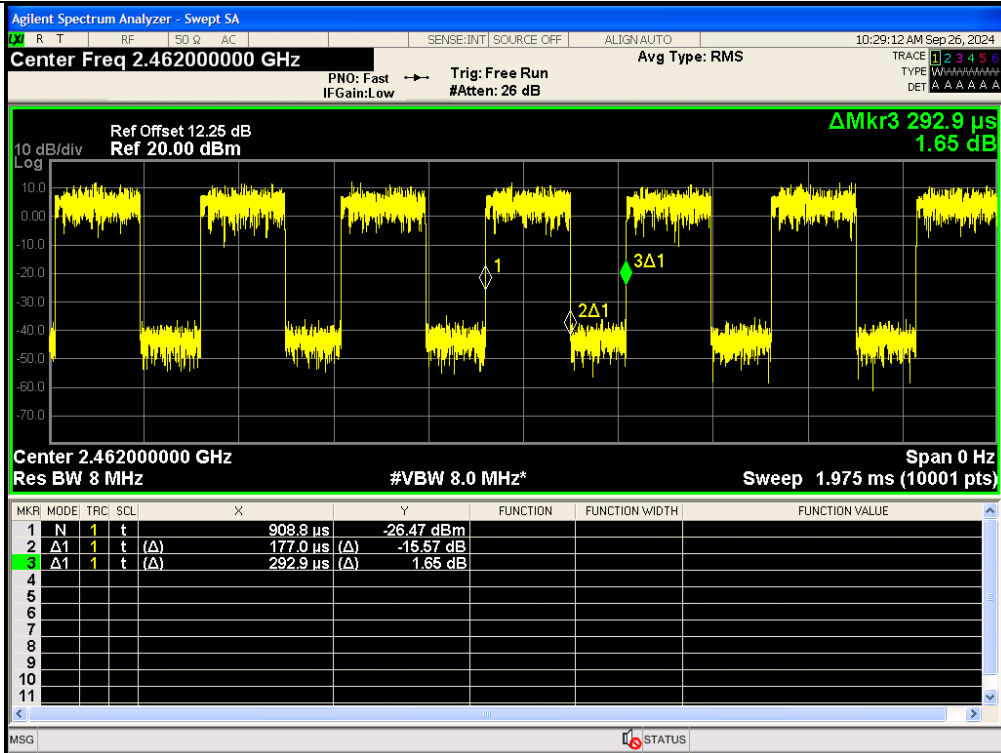


IEEE 802.11g 20MHz Channel 11

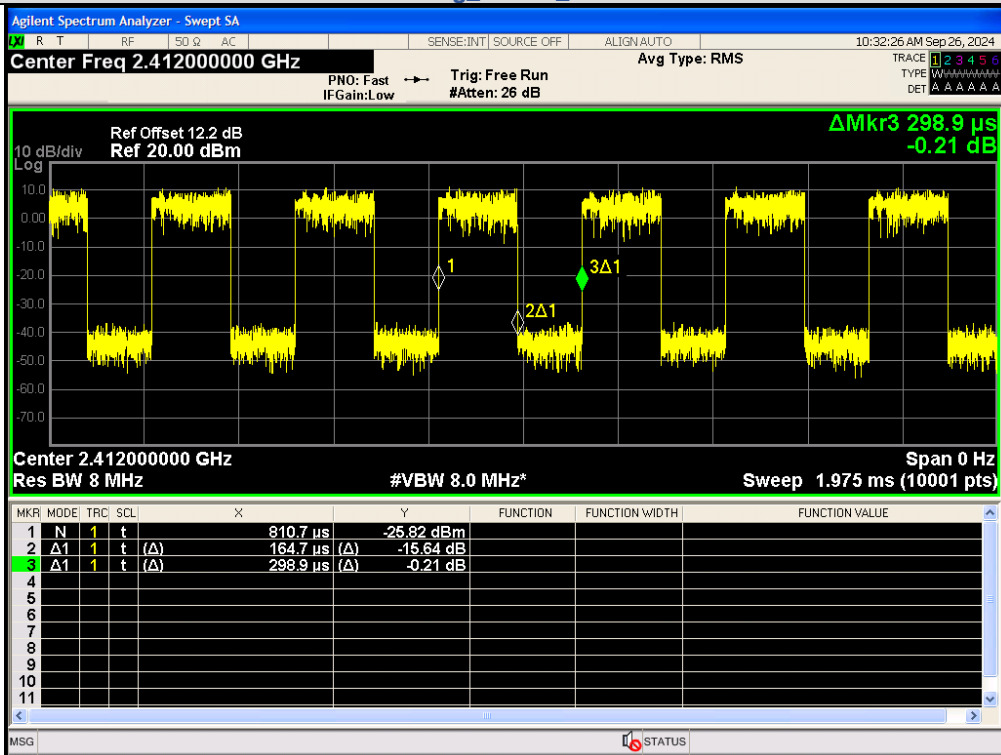


IEEE 802.11n 20MHz Channel 1

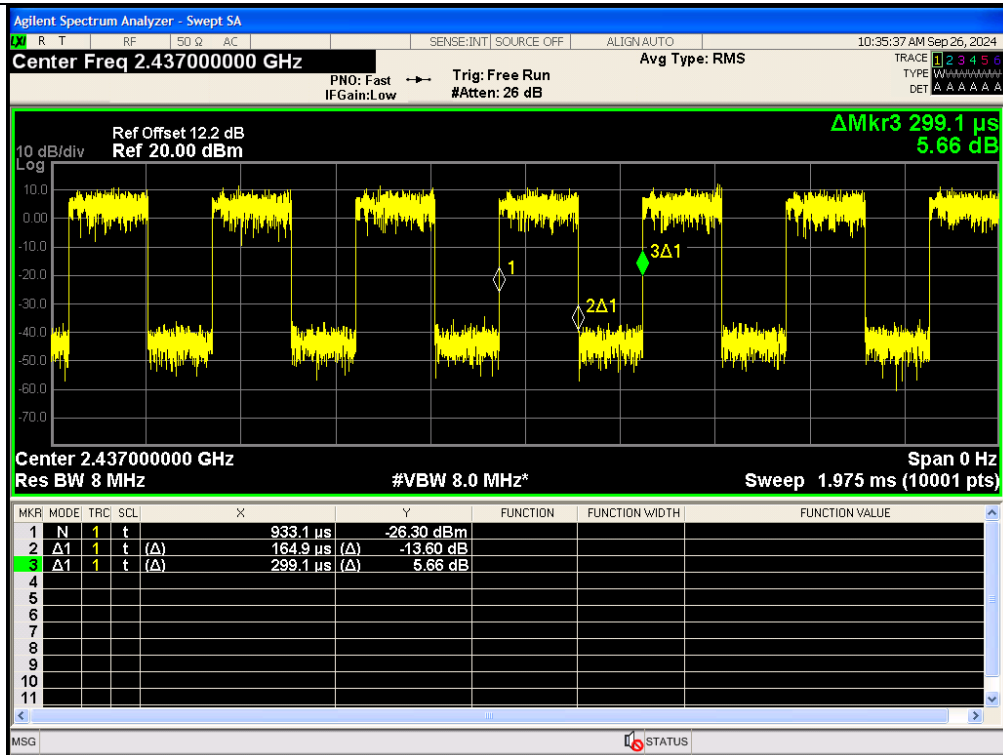


IEEE 802.11n\_20MHz\_Channel 6

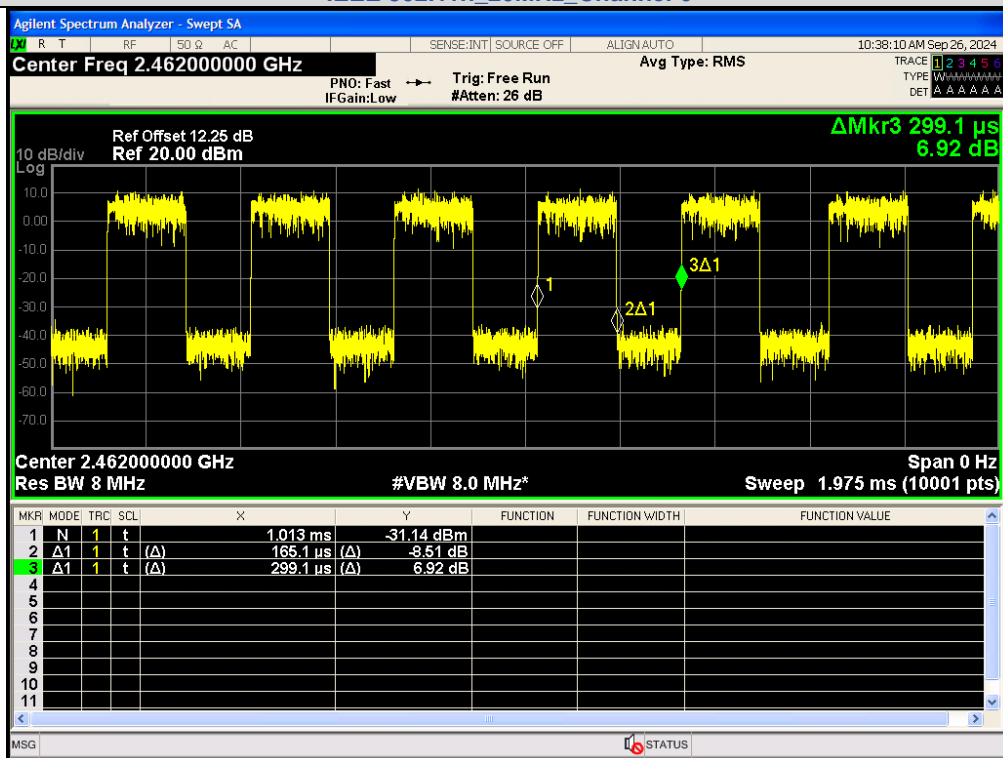


IEEE 802.11n\_20MHz\_Channel 11

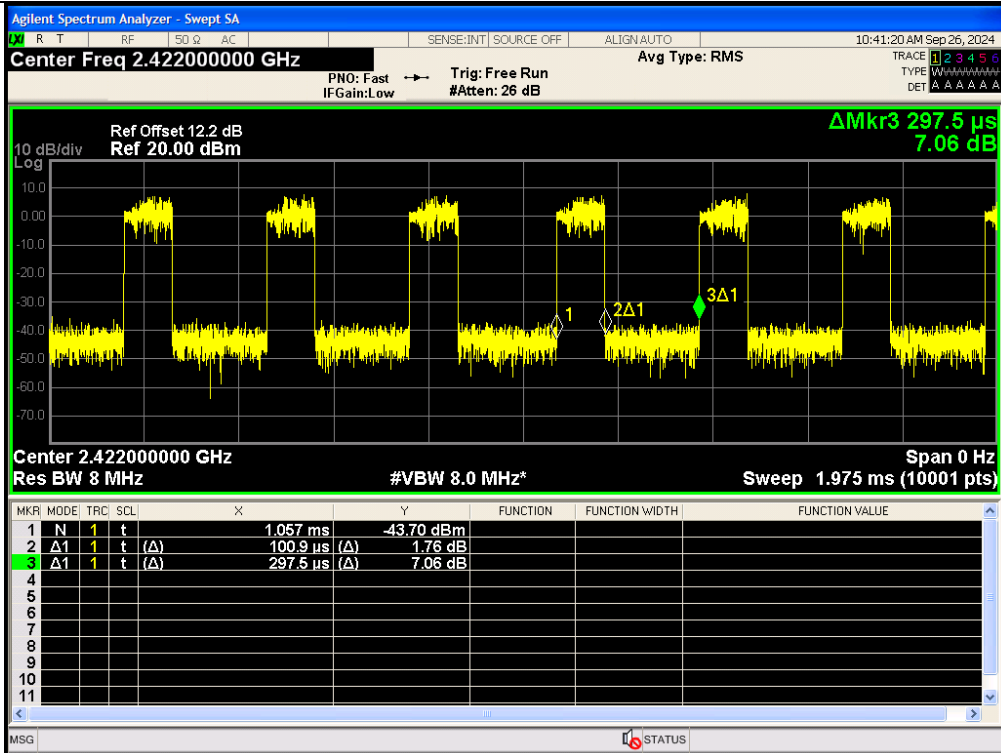

IEEE 802.11n\_40MHz\_Channel 3

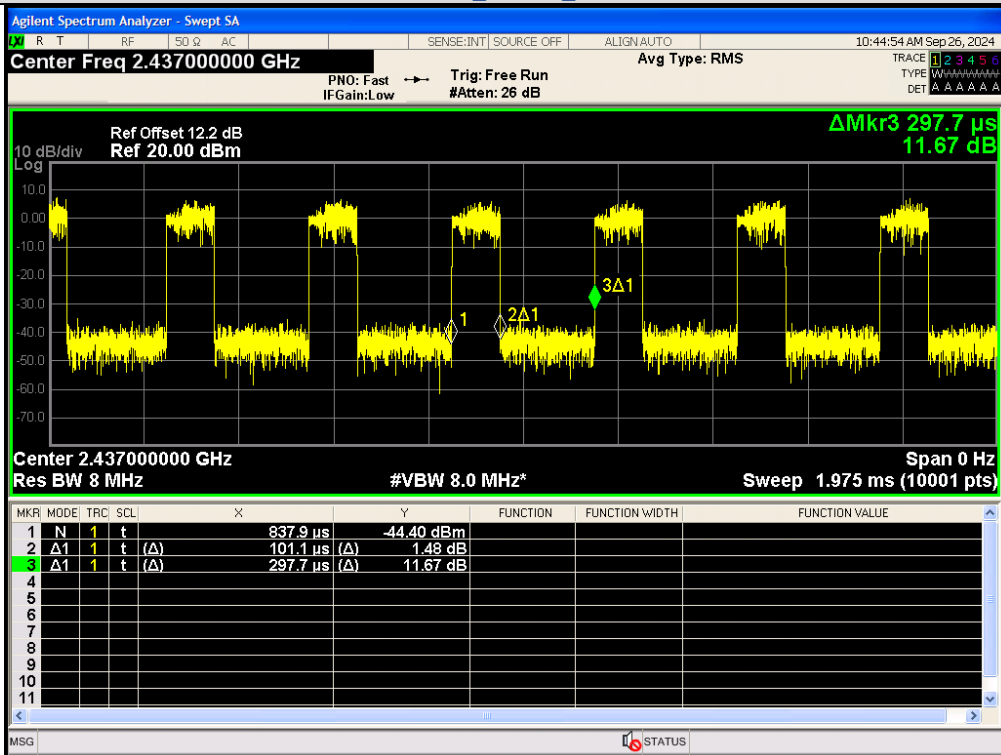

IEEE 802.11n\_40MHz\_Channel 6

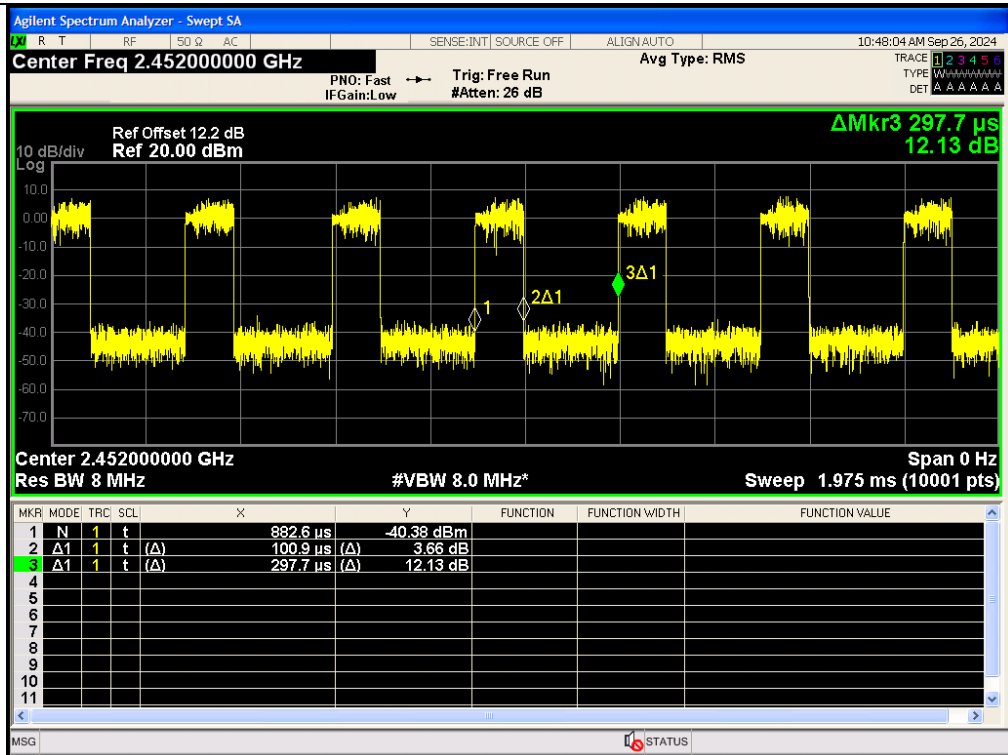


IEEE 802.11n\_40MHz\_Channel 9


## APPENDIX II. Power Spectral Density

### Test Result

Mode	Channel	PSD (dBm/3kHz) Ant. 0	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	-14.448	≤8	PASS
	6	-3.333		PASS
	11	-13.936		PASS
IEEE 802.11g	1	-17.842		PASS
	6	-17.864		PASS
	11	-18.683		PASS
IEEE 802.11n_20	1	-18.349		PASS
	6	-17.347		PASS
	11	-18.302		PASS
IEEE 802.11n_40	3	-22.400		PASS
	6	-23.674		PASS
	9	-22.482		PASS

### Test Graphs

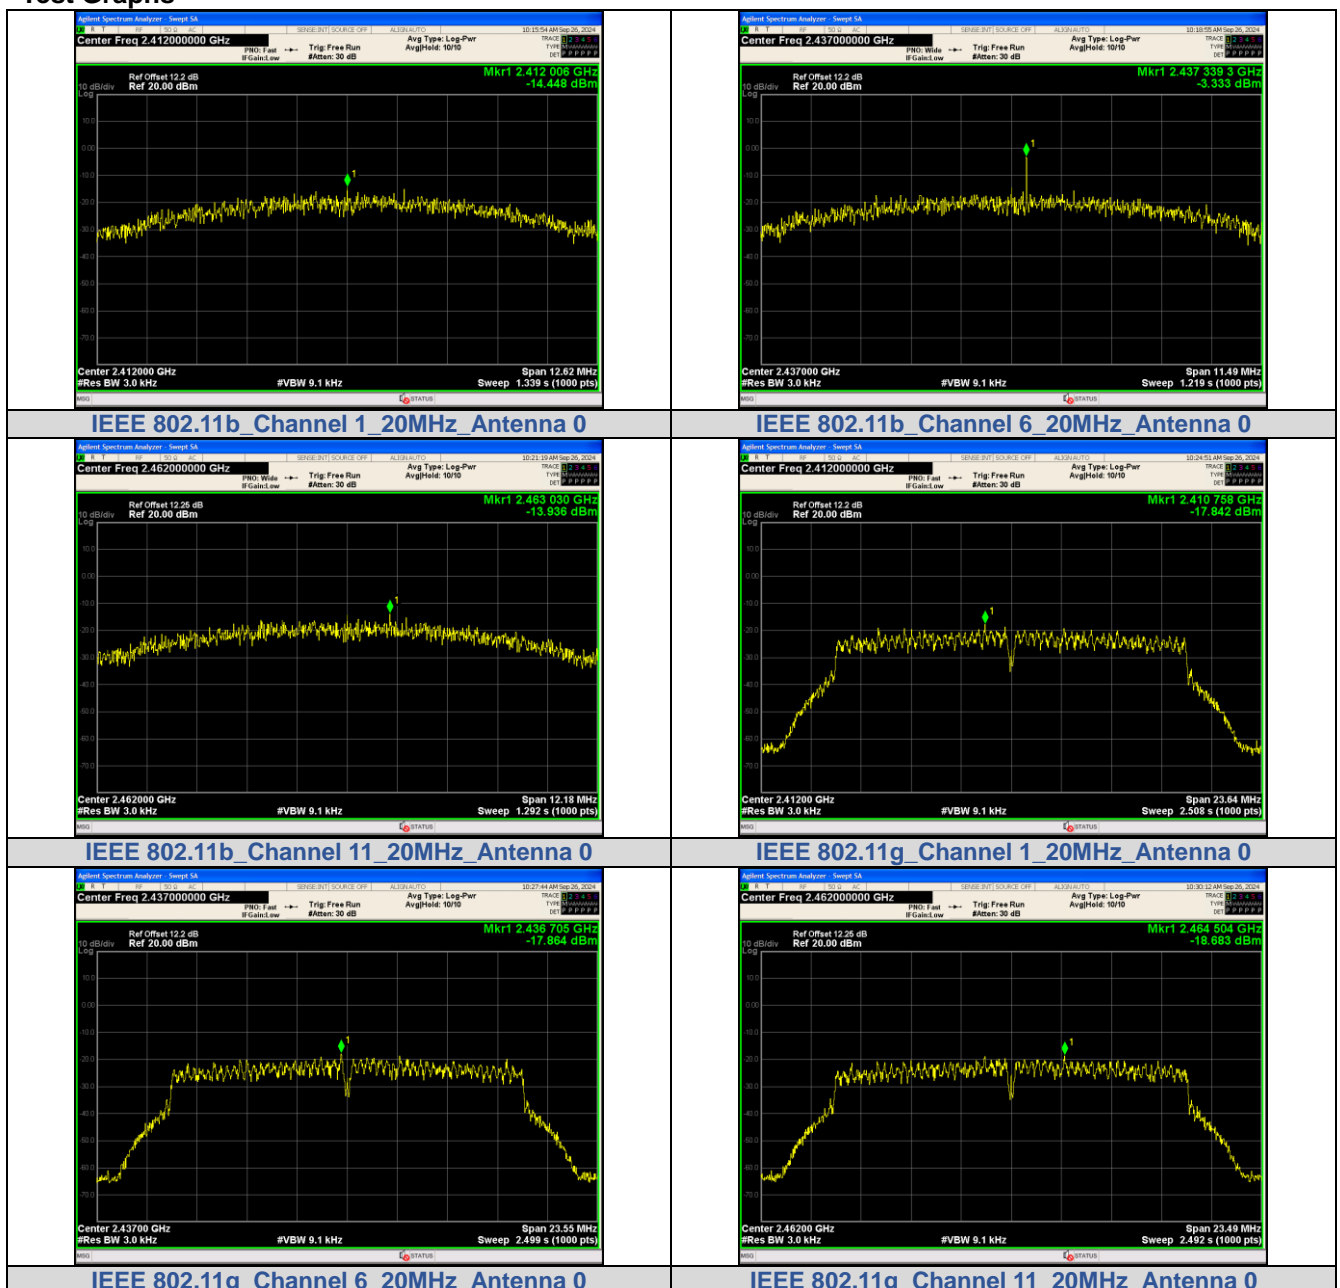

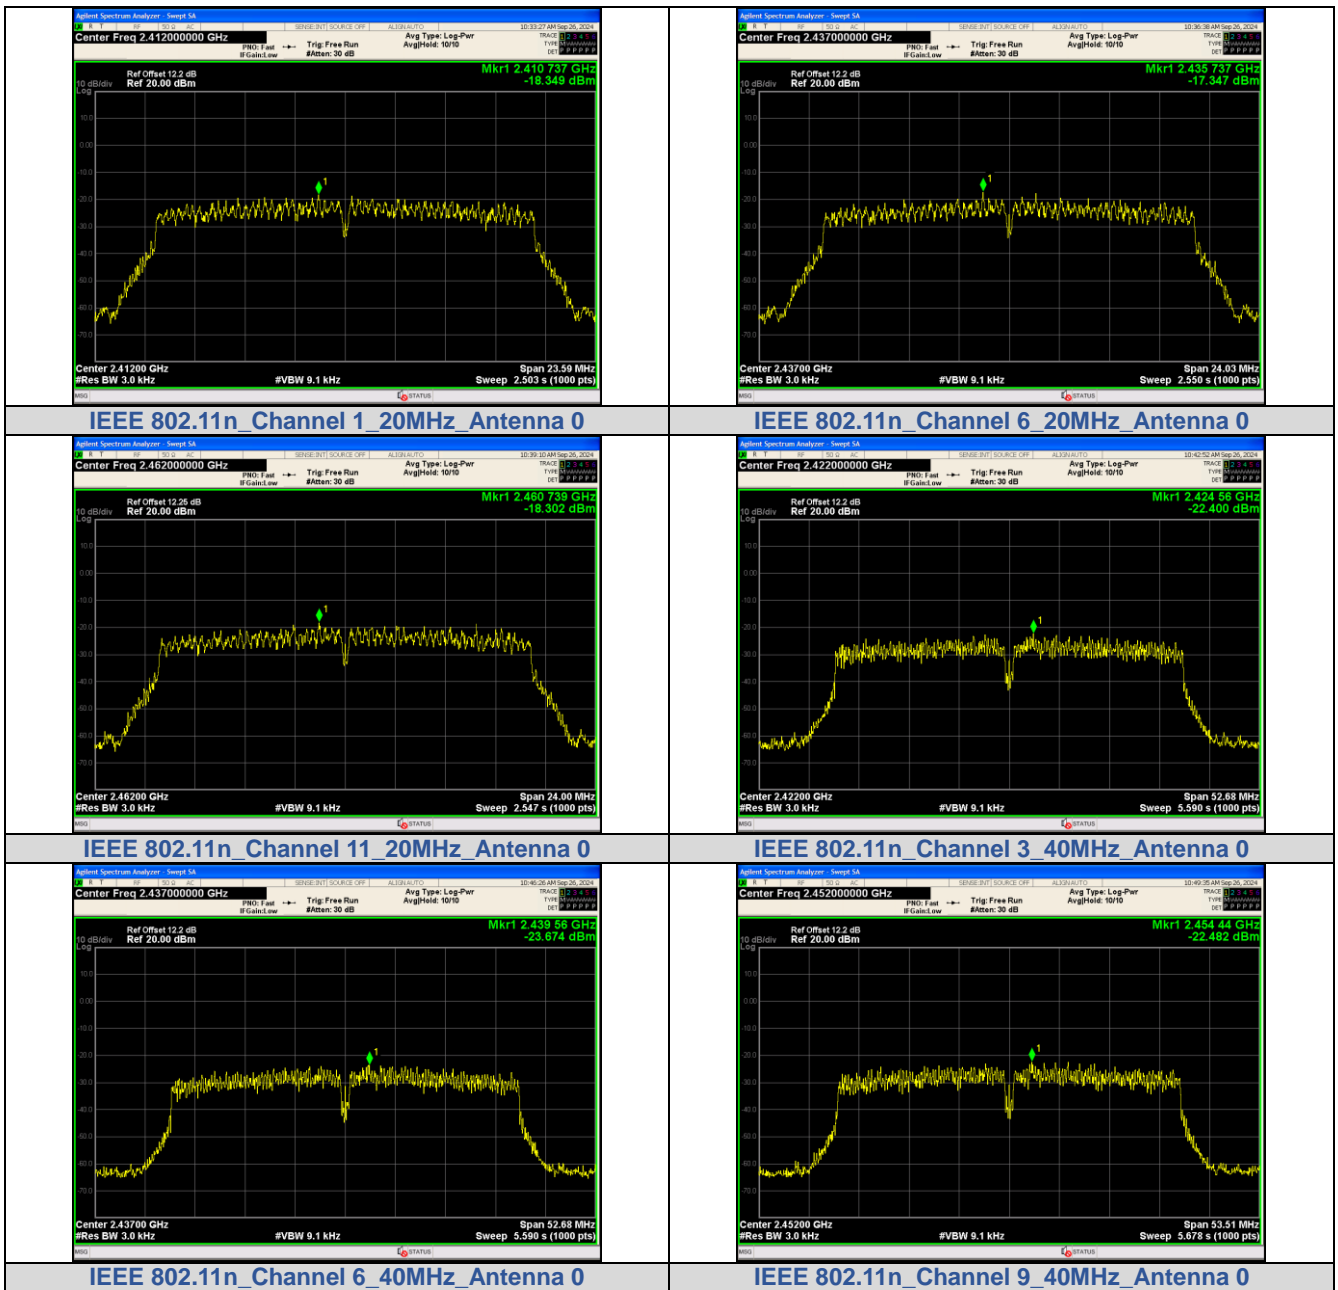

**APPENDIX III. Conducted Peak Output Power****Test Result**

## Conducted Output Power


Mode	Channel	Ant. 0 (dBm)	Ant. 1 (dBm)	Ant. 2 (dBm)	Ant. 3 (dBm)	Total (dBm)	Limit (dBm)	Result
IEEE 802.11b	1	12.55				N/A	≤30	PASS
	6	12.44				N/A	≤30	PASS
	11	13.13				N/A	≤30	PASS
IEEE 802.11g	1	14.88				N/A	≤30	PASS
	6	14.83				N/A	≤30	PASS
	11	14.71				N/A	≤30	PASS
IEEE 802.11n_20	1	14.34				N/A	≤30	PASS
	6	14.33				N/A	≤30	PASS
	11	14.21				N/A	≤30	PASS
IEEE 802.11n_40	3	14.15				N/A	≤30	PASS
	6	13.30				N/A	≤30	PASS
	9	14.20				N/A	≤30	PASS

### APPENDIX IV. 99% Bandwidth


#### Test Result

Mode	Channel	Ant.	Center Frequency (MHz)	99% BW (MHz)
IEEE 802.11b	1	0	2412	13.277
	6		2437	13.195
	11		2462	13.177
IEEE 802.11g	1		2412	16.553
	6		2437	16.474
	11		2462	16.557
IEEE 802.11n_20	1		2412	17.622
	6		2437	17.642
	11		2462	17.618
IEEE 802.11n_40	3		2422	36.089
	6		2437	35.997
	9		2452	36.057

#### Test Graphs

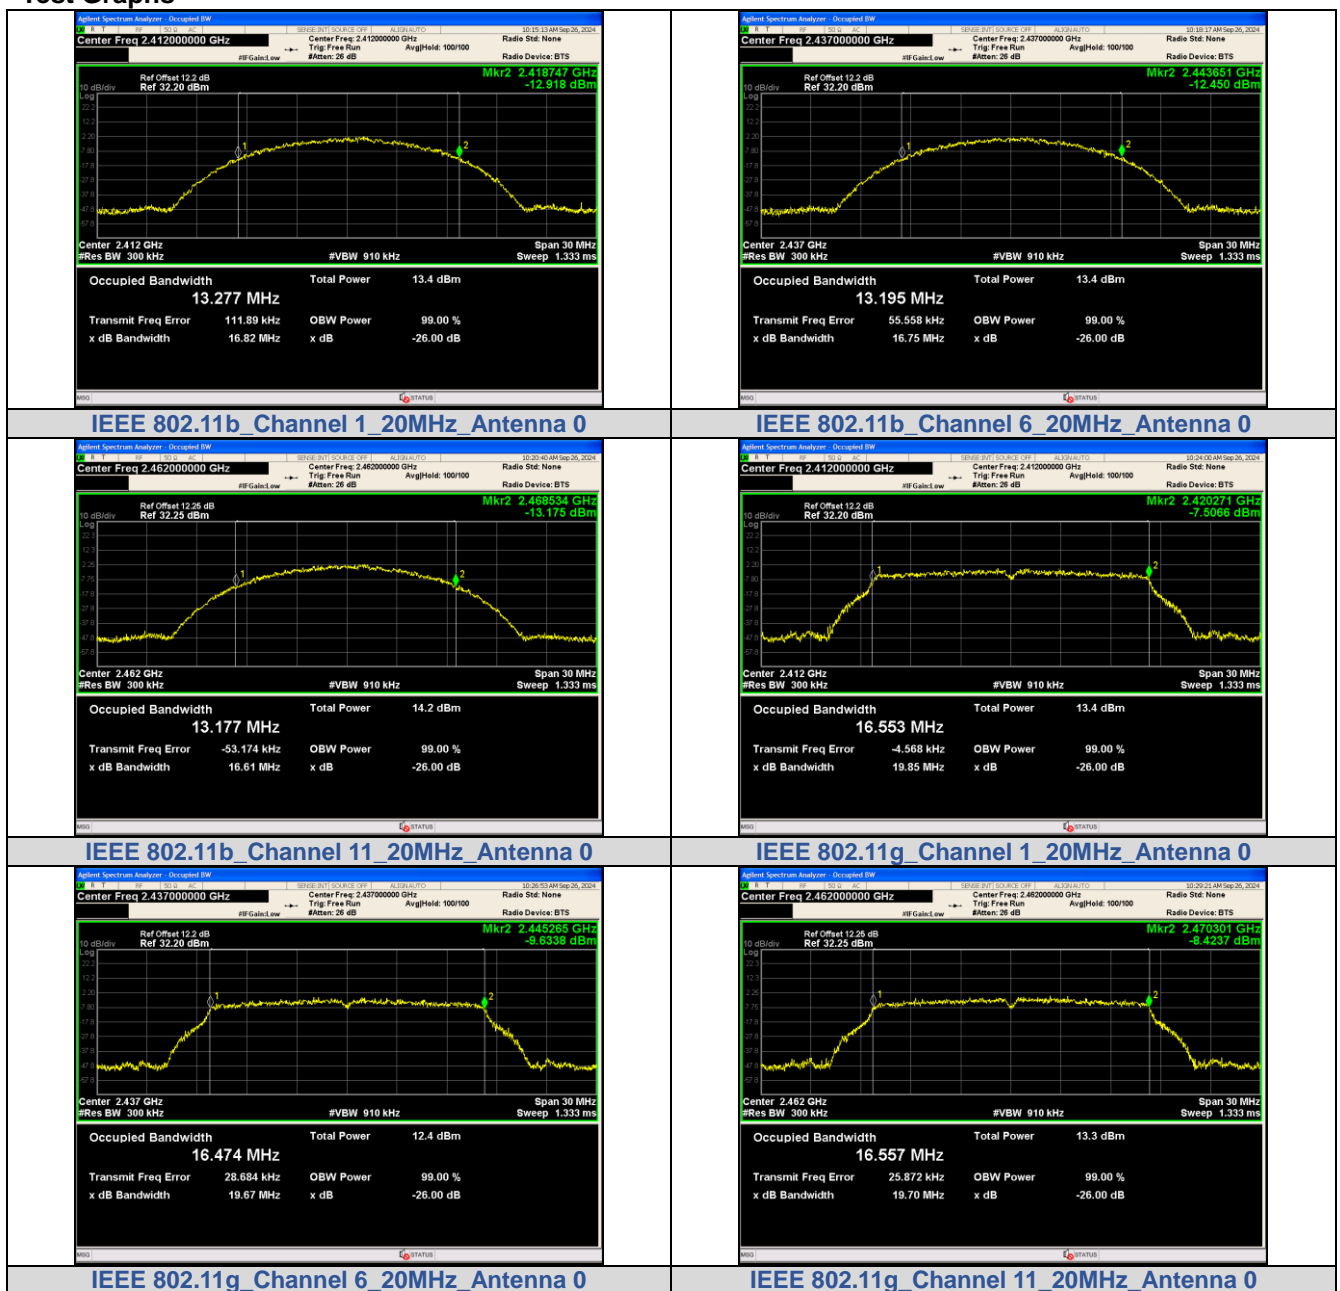



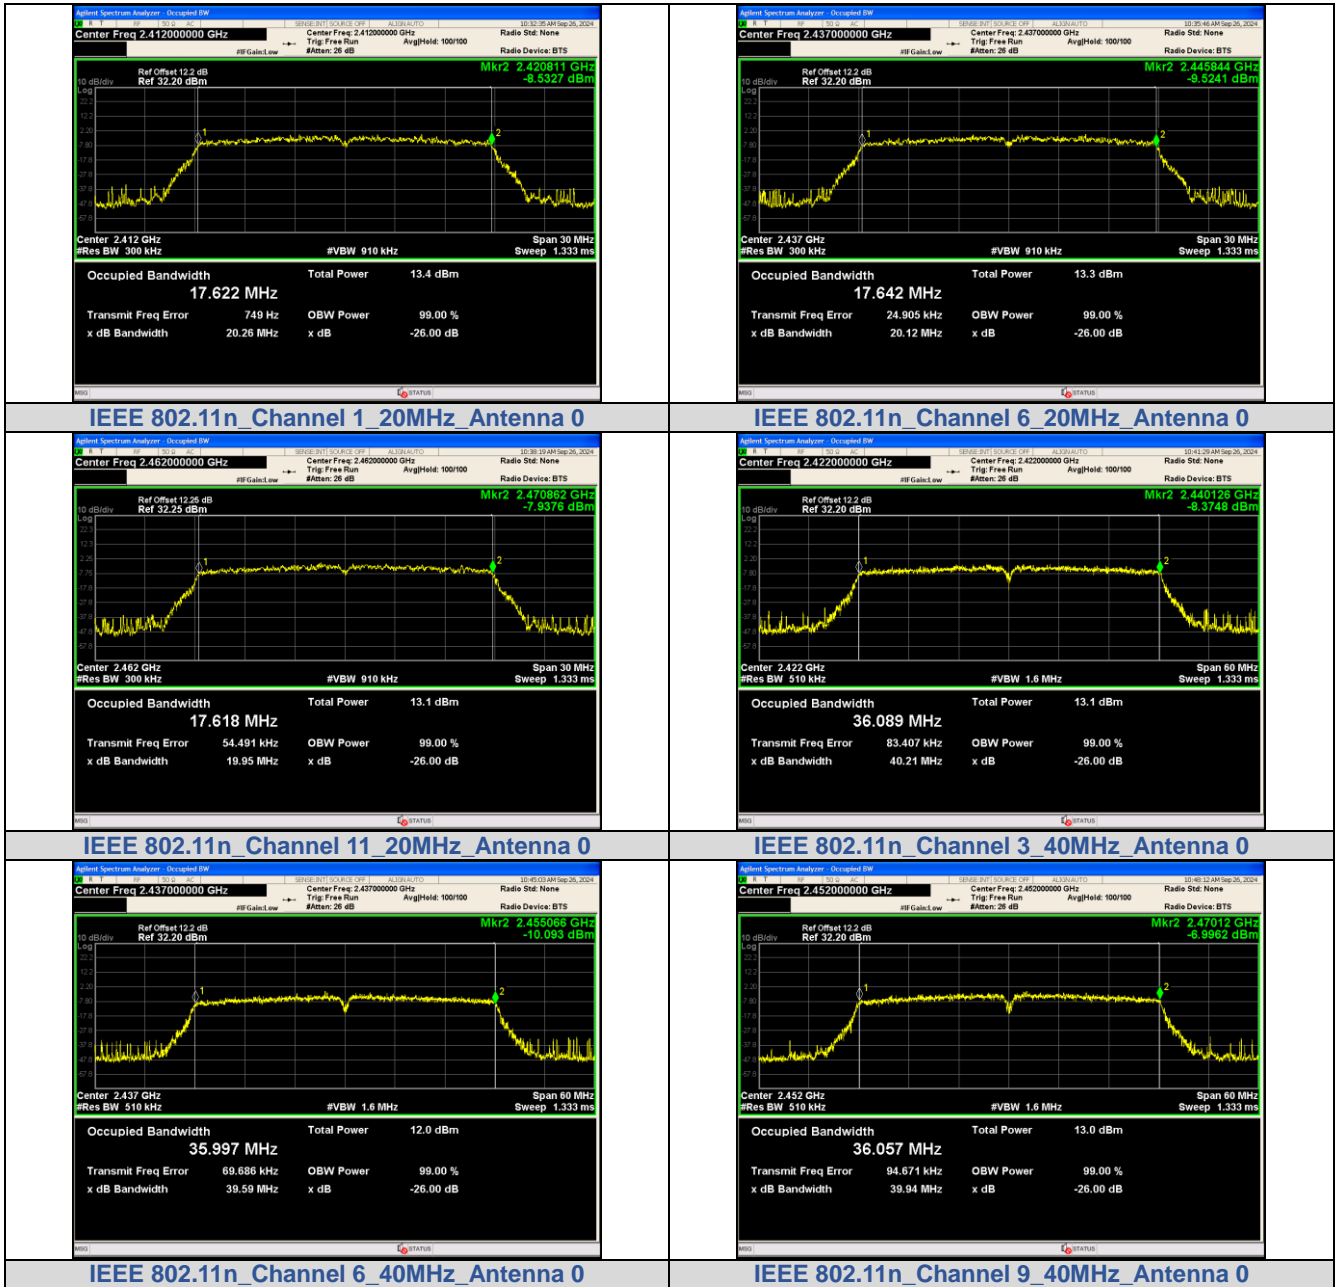



## APPENDIX V. 6dB Bandwidth

### Test Result


Mode	Channel	Ant.	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b	1	0	2412	8.413	≥0.5	PASS
	6		2437	7.660		PASS
	11		2462	8.122		PASS
IEEE 802.11g	1		2412	15.76		PASS
	6		2437	15.70		PASS
	11		2462	15.66		PASS
IEEE 802.11n_20	1		2412	15.73		PASS
	6		2437	16.02		PASS
	11		2462	16.00		PASS
IEEE 802.11n_40	3	2422	35.12	PASS		
	6	2437	35.12	PASS		
	9	2452	35.67	PASS		

### Test Graphs

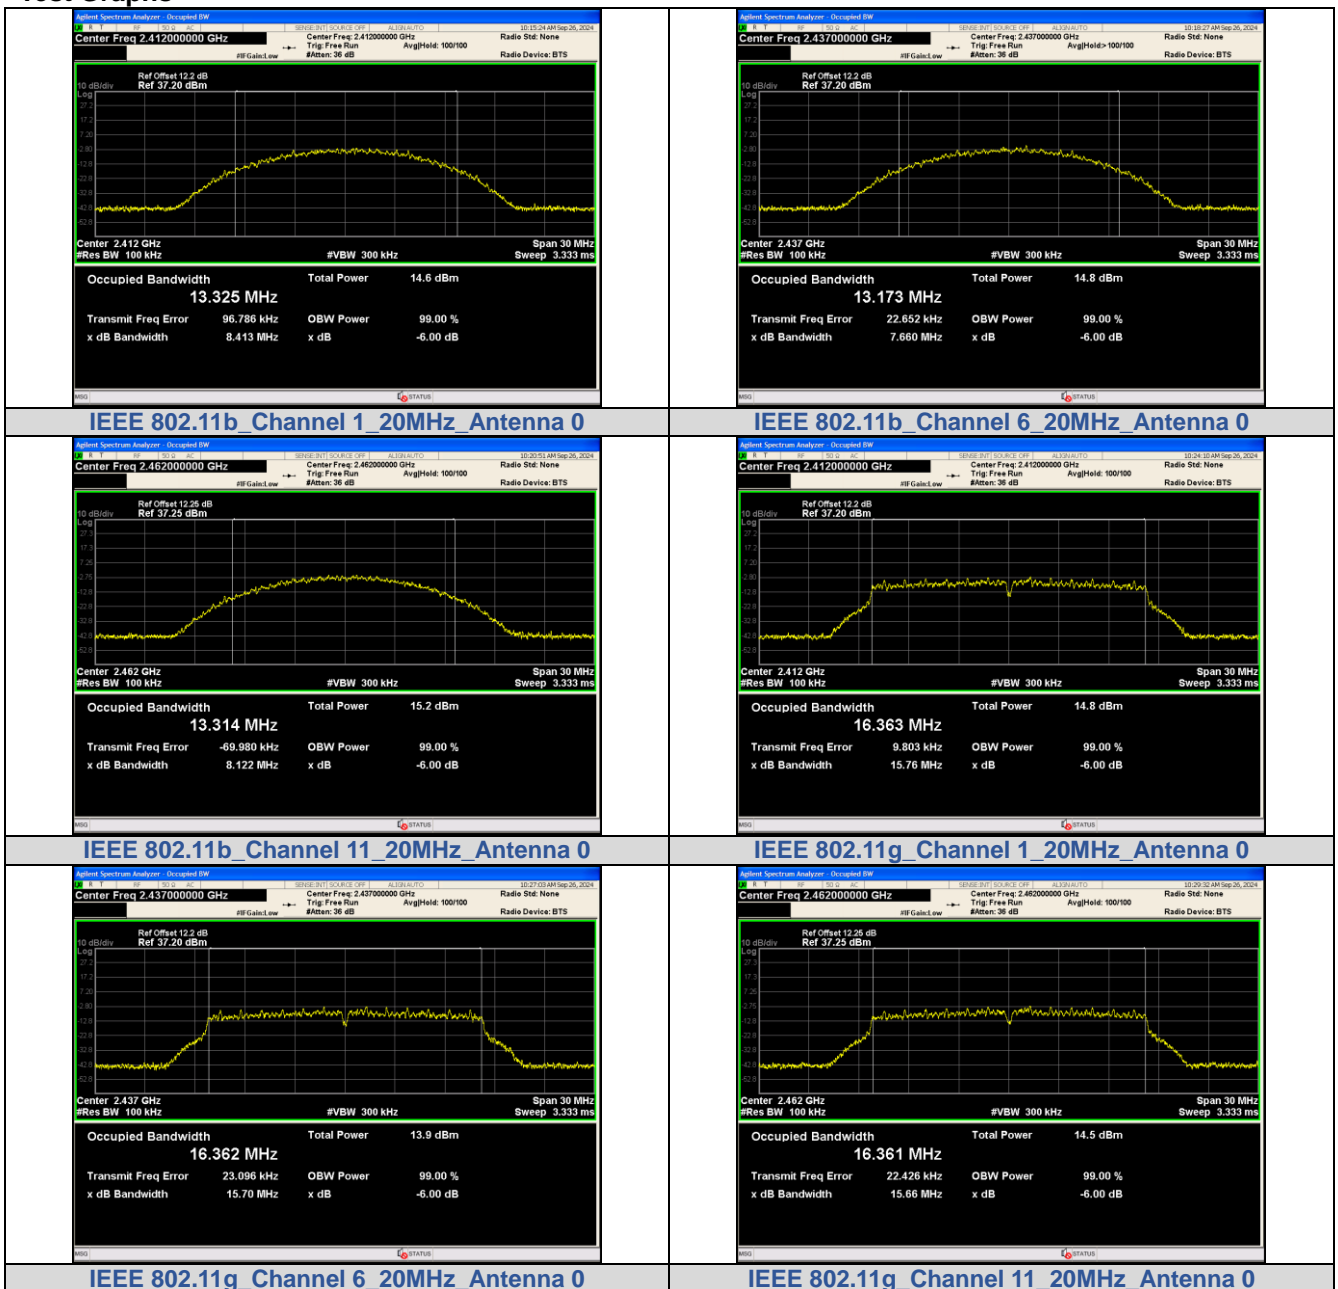


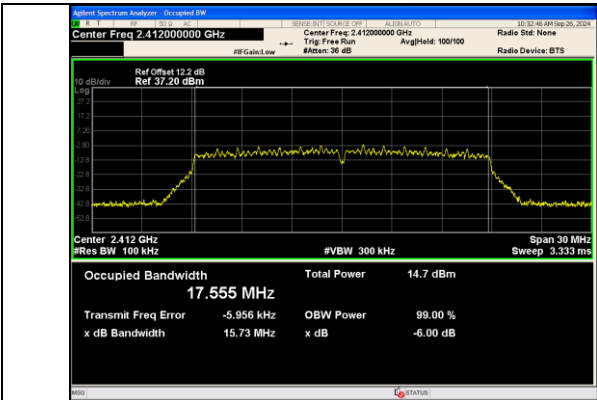


IEEE 802.11n Channel 1 20MHz Antenna 0

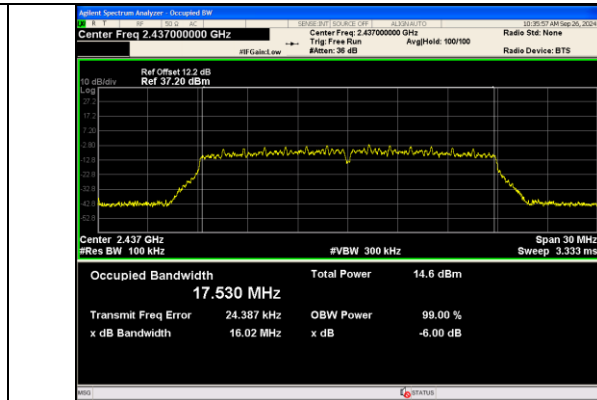


IEEE 802.11n Channel 6 20MHz Antenna 0

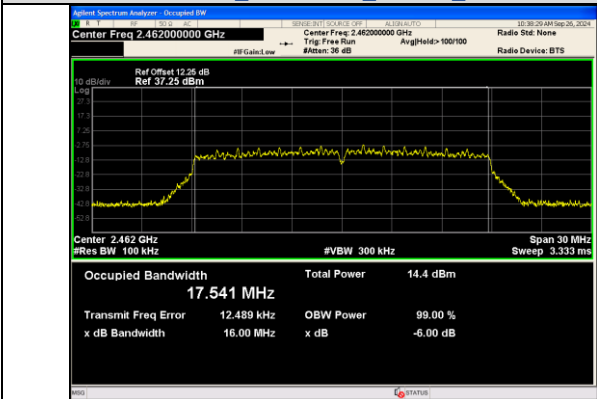


IEEE 802.11n Channel 11 20MHz Antenna 0

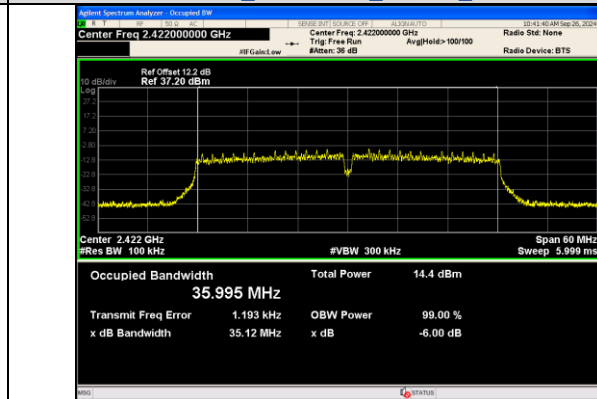

IEEE 802.11n Channel 3 40MHz Antenna 0

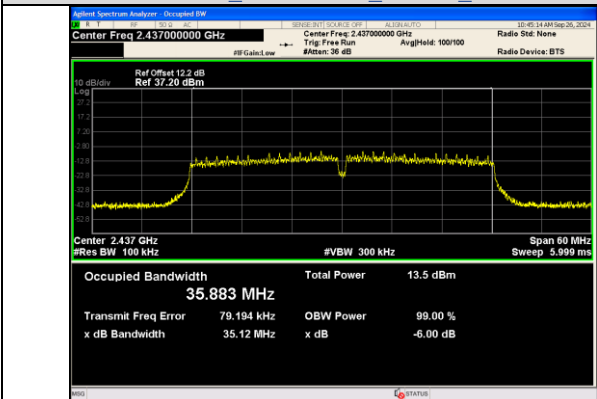

IEEE 802.11n Channel 6 40MHz Antenna 0

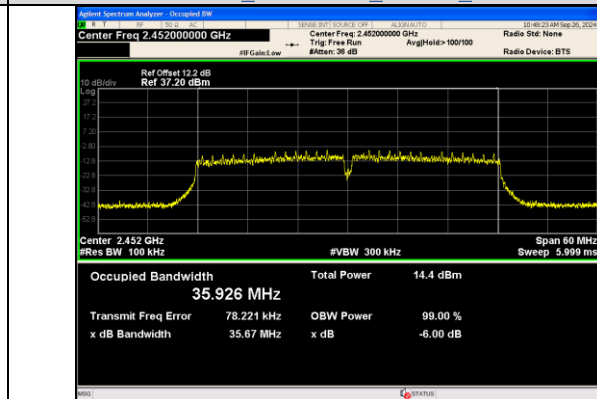

IEEE 802.11n Channel 9 40MHz Antenna 0

### APPENDIX VI. Conducted Out Of Band Emission

Test Result



Mode	Channel	Ant.	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
IEEE 802.11b	1	0	2338.34	-38.969	-19.87	-19.099	PASS
			2400.00	-40.703	-19.87	-20.833	PASS
			4815.00	-51.869	-19.87	-31.999	PASS
			7217.80	-50.765	-19.87	-30.895	PASS
			9644.30	-52.428	-19.87	-32.558	PASS
	6		24995.6	-35.878	-19.87	-16.008	PASS
			4877.42	-51.990	-19.78	-32.210	PASS
			7321.42	-51.186	-19.78	-31.406	PASS
			9752.31	-51.493	-19.78	-31.713	PASS
	11		24976.9	-35.445	-19.78	-15.665	PASS
			2483.50	-41.297	-19.41	-21.887	PASS
			4912.38	-51.725	-19.41	-32.315	PASS
			7369.49	-52.050	-19.41	-32.640	PASS
			9830.97	-50.554	-19.41	-31.144	PASS
			24993.1	-34.276	-19.41	-14.866	PASS
IEEE 802.11g	1	2395.41	-39.422	-22.15	-17.272	PASS	
		2400.00	-41.508	-22.15	-19.358	PASS	
		4838.10	-51.965	-22.15	-29.815	PASS	
		7251.50	-50.466	-22.15	-28.316	PASS	
		9649.90	-51.852	-22.15	-29.702	PASS	
	6	24940.7	-34.465	-22.15	-12.315	PASS	
		4870.56	-52.552	-22.42	-30.132	PASS	
		7314.56	-51.057	-22.42	-28.637	PASS	
		9764.17	-51.217	-22.42	-28.797	PASS	
	11	24931.3	-35.797	-22.42	-13.377	PASS	
		2483.50	-42.312	-22.07	-20.242	PASS	
		4916.13	-51.582	-22.07	-29.512	PASS	
		7403.83	-51.848	-22.07	-29.778	PASS	
		9866.55	-51.422	-22.07	-29.352	PASS	
		24913.2	-35.735	-22.07	-13.665	PASS	
IEEE 802.11n_20	1	2352.64	-39.305	-22.05	-17.255	PASS	
		2400.00	-39.832	-22.05	-17.782	PASS	
		4825.60	-52.321	-22.05	-30.271	PASS	
		7250.30	-51.286	-22.05	-29.236	PASS	
		9663.00	-51.664	-22.05	-29.614	PASS	
	6	24959.4	-35.757	-22.05	-13.707	PASS	
		4891.78	-51.926	-21.95	-29.976	PASS	
		7305.19	-51.041	-21.95	-29.091	PASS	
		9737.33	-50.252	-21.95	-28.302	PASS	
	11	24883.3	-35.232	-21.95	-13.282	PASS	
		2483.50	-41.874	-22.09	-19.784	PASS	
		4913.63	-51.003	-22.09	-28.913	PASS	
		7389.47	-51.137	-22.09	-29.047	PASS	
		9850.32	-50.681	-22.09	-28.591	PASS	
		24901.4	-35.437	-22.09	-13.347	PASS	
IEEE 802.11n_40	3	2388.65	-39.124	-25.18	-13.944	PASS	
		2400.00	-41.448	-25.18	-16.268	PASS	
		4872.40	-52.013	-25.18	-26.833	PASS	
		7292.10	-50.781	-25.18	-25.601	PASS	
		9691.80	-50.804	-25.18	-25.624	PASS	
	6	24975.0	-36.257	-25.18	-11.077	PASS	
		4868.68	-51.225	-26.0	-25.225	PASS	
		7330.16	-50.341	-26.0	-24.341	PASS	
		9748.57	-51.145	-26.0	-25.145	PASS	
	9	24998.1	-35.692	-26.0	-9.692	PASS	
		2483.50	-41.969	-25.15	-16.819	PASS	
		4920.50	-51.305	-25.15	-26.155	PASS	
		7375.11	-51.421	-25.15	-26.271	PASS	
		9773.54	-51.738	-25.15	-26.588	PASS	
		24952.6	-35.342	-25.15	-10.192	PASS	

Test Graphs




In-Band Reference Level  
IEEE 802.11b Channel 1 20MHz Antenna 0

Out Of Band Emission  
IEEE 802.11b Channel 1 20MHz Antenna 0

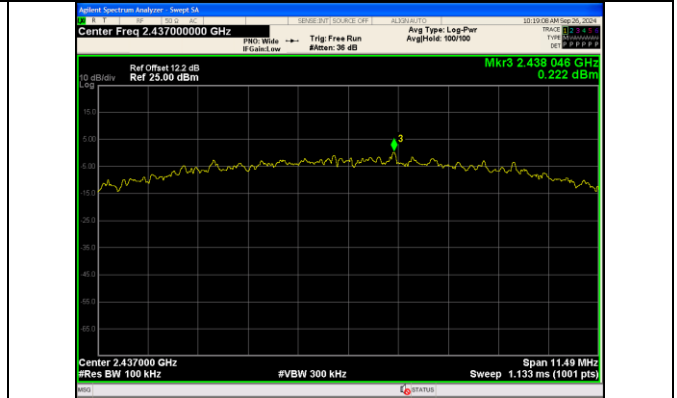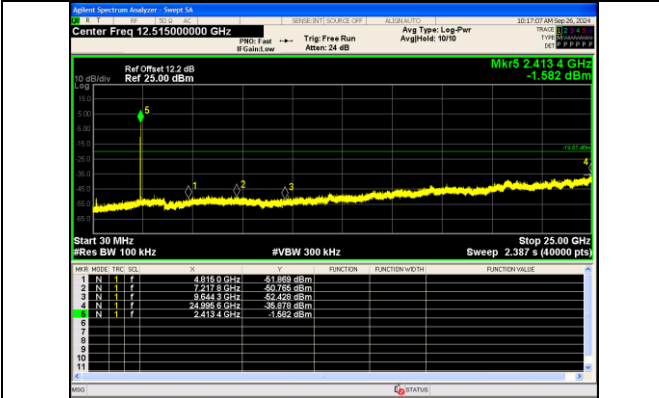



30.0 MHz - 25000.0 MHz  
IEEE 802.11b Channel 1 20MHz Antenna 0

In-Band Reference Level  
IEEE 802.11b Channel 6 20MHz Antenna 0

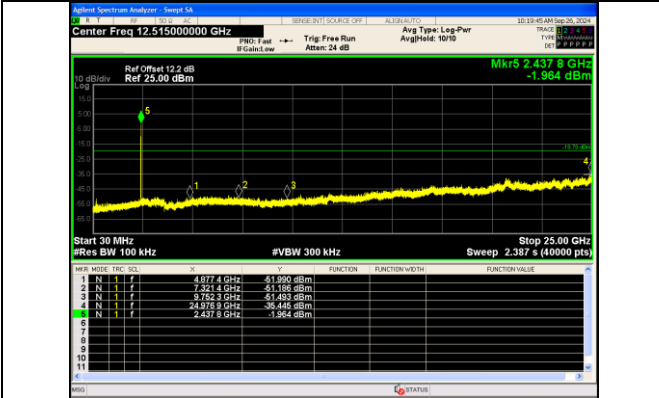


30.0 MHz - 25000.0 MHz  
IEEE 802.11b Channel 6 20MHz Antenna 0

In-Band Reference Level  
IEEE 802.11b Channel 11 20MHz Antenna 0

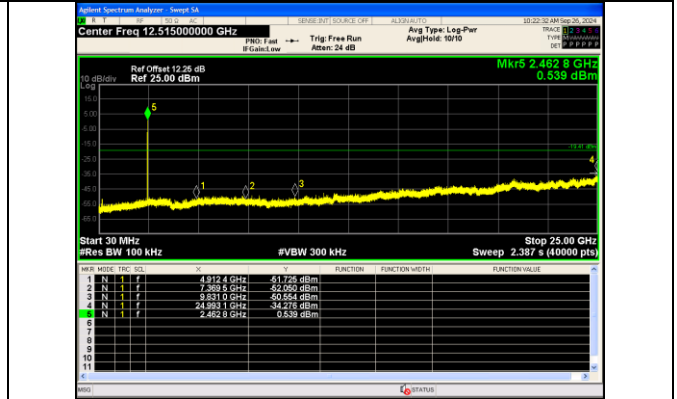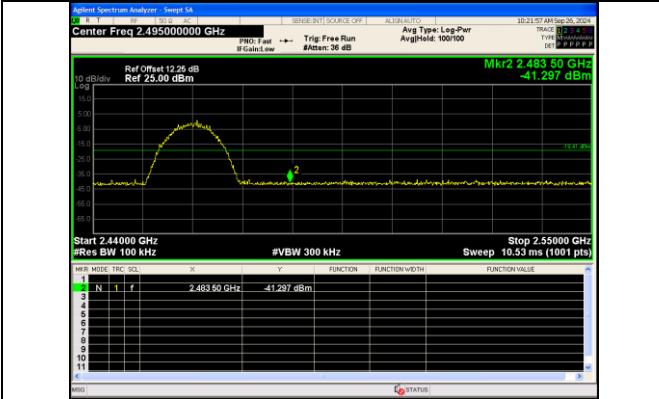


Out Of Band Emission  
IEEE 802.11b Channel 11 20MHz Antenna 0


30.0 MHz - 25000.0 MHz  
IEEE 802.11b Channel 11 20MHz Antenna 0

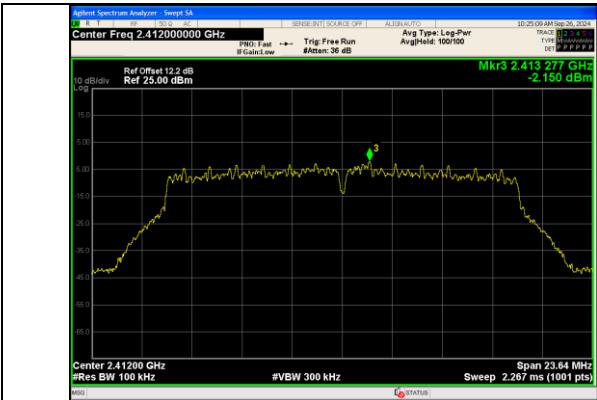


**In-Band Reference Level  
 IEEE 802.11g Channel 1 20MHz Antenna 0**

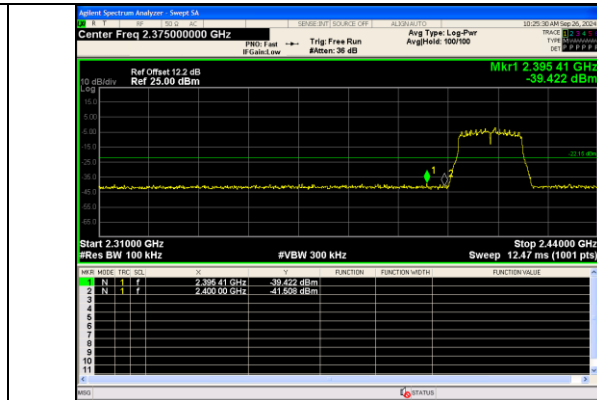


**Out Of Band Emission  
 IEEE 802.11g Channel 1 20MHz Antenna 0**

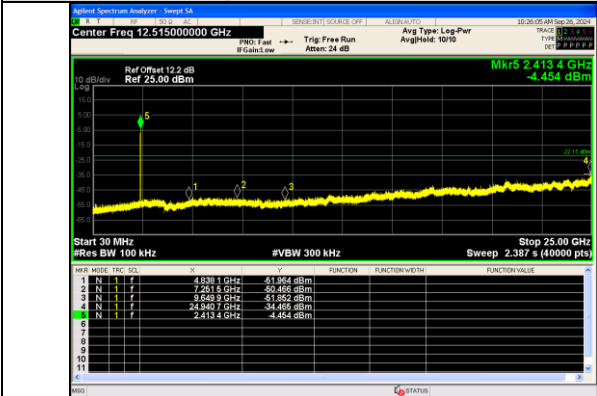


**30.0 MHz - 25000.0 MHz  
 IEEE 802.11g Channel 1 20MHz Antenna 0**

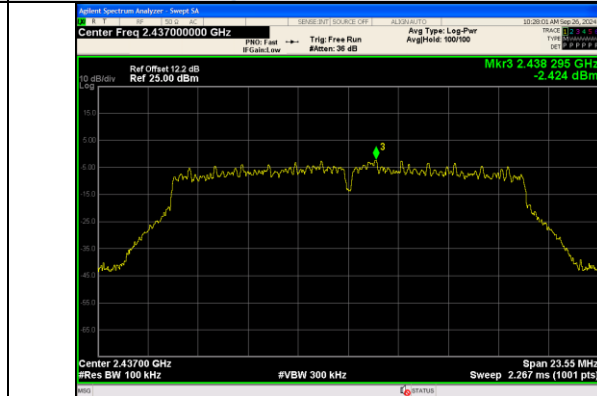


**In-Band Reference Level  
 IEEE 802.11g Channel 6 20MHz Antenna 0**

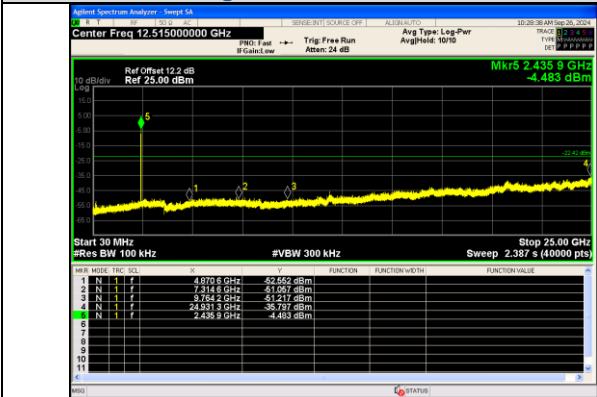


**30.0 MHz - 25000.0 MHz  
 IEEE 802.11g Channel 6 20MHz Antenna 0**

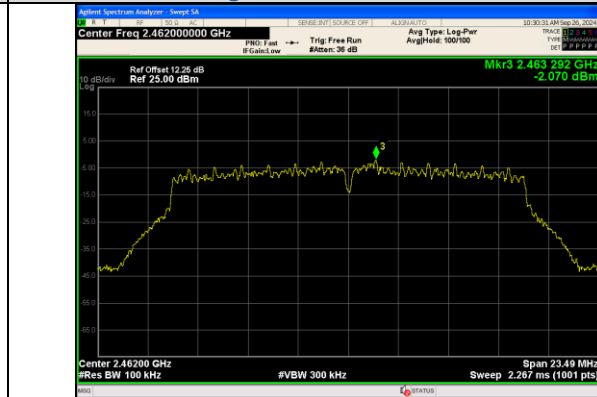


**In-Band Reference Level  
 IEEE 802.11g Channel 11 20MHz Antenna 0**

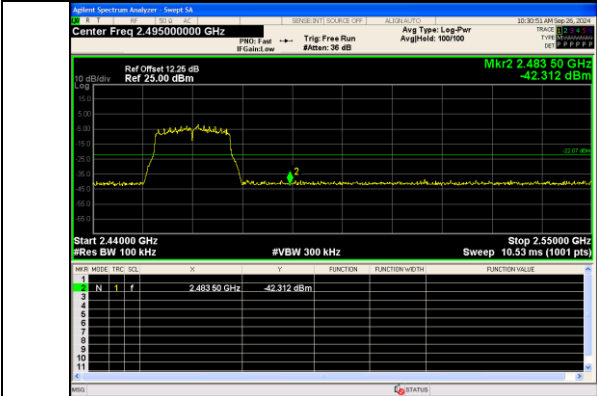


**Out Of Band Emission  
 IEEE 802.11g Channel 11 20MHz Antenna 0**

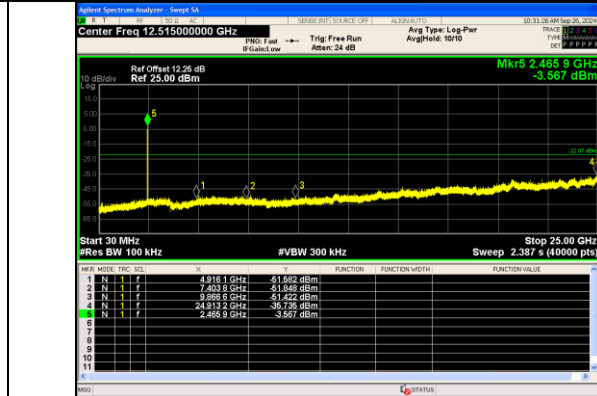


**30.0 MHz - 25000.0 MHz  
 IEEE 802.11g Channel 11 20MHz Antenna 0**

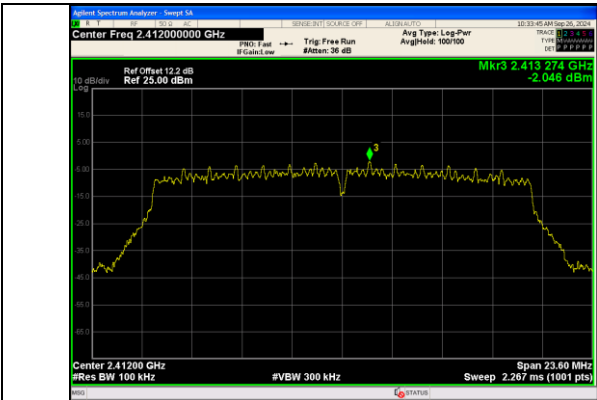


**In-Band Reference Level  
IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0**

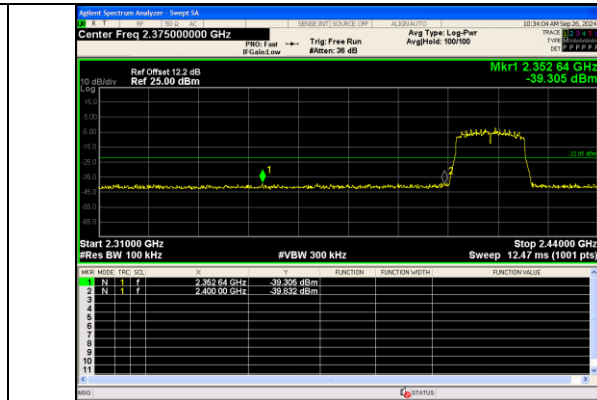


**Out Of Band Emission  
IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0**

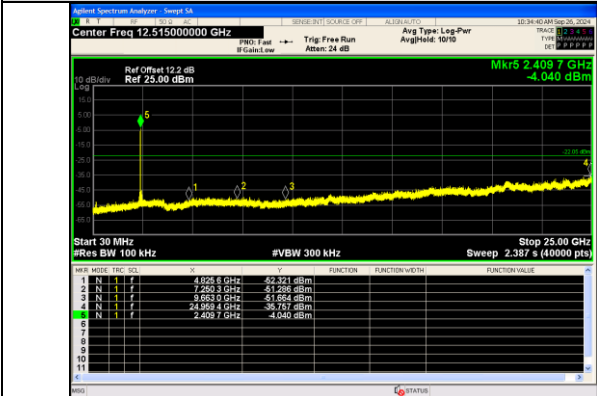


**30.0 MHz - 25000.0 MHz  
IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0**

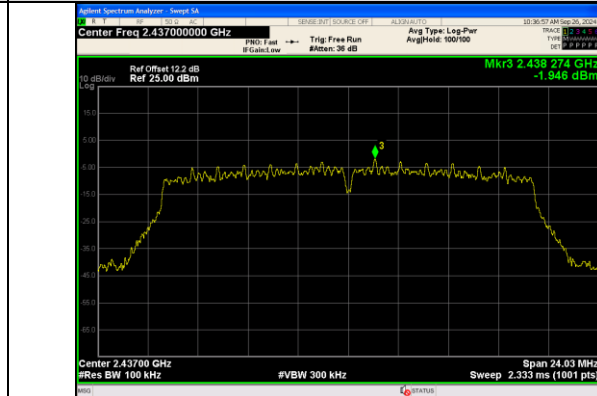


**In-Band Reference Level  
IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0**

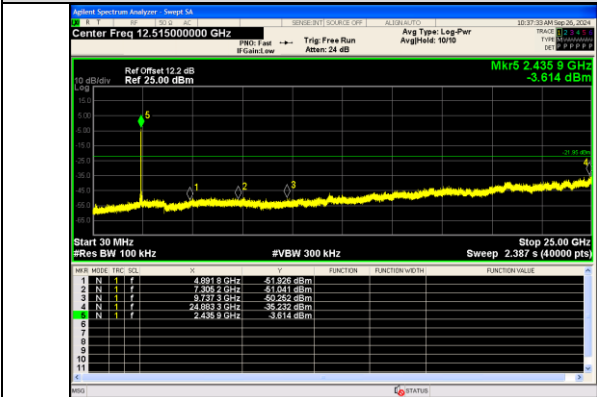


**30.0 MHz - 25000.0 MHz  
IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0**

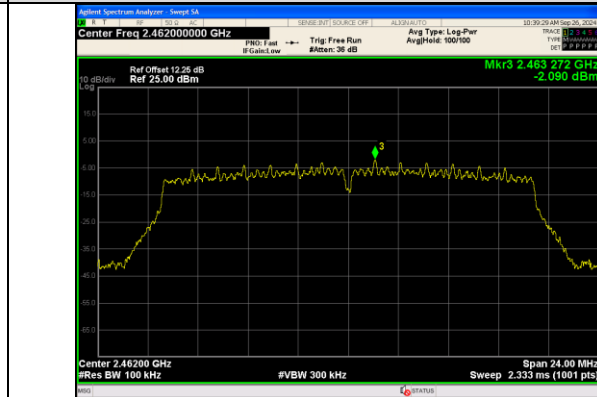


**In-Band Reference Level  
IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0**

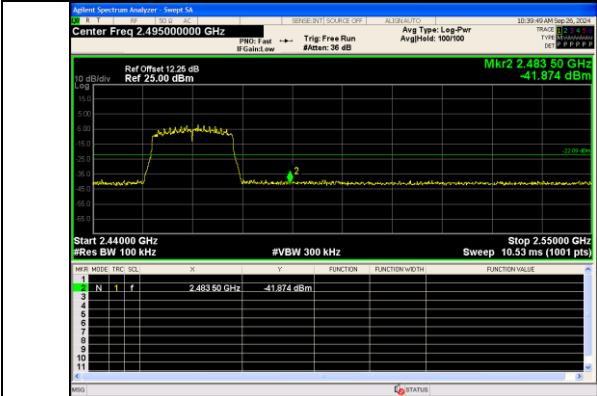


**Out Of Band Emission  
IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0**

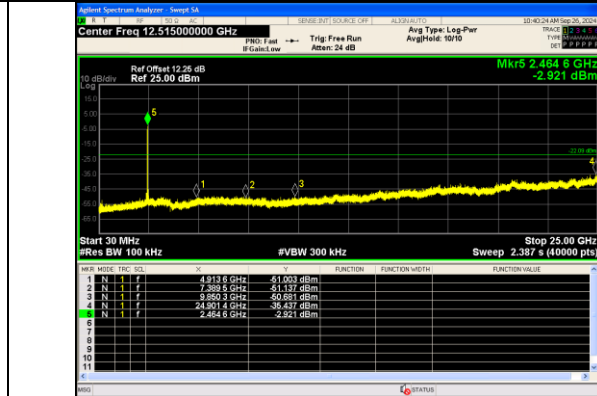


**30.0 MHz - 25000.0 MHz  
IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0**

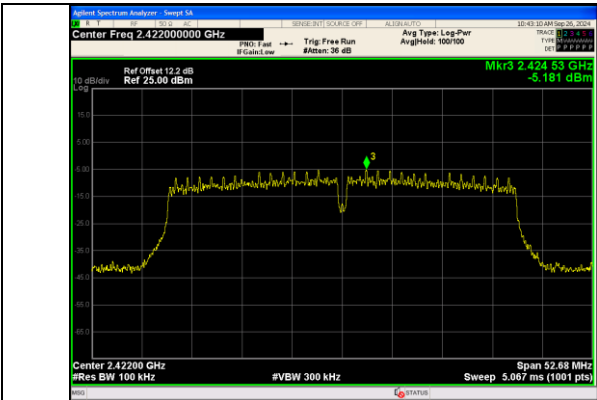


**In-Band Reference Level**  
IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0

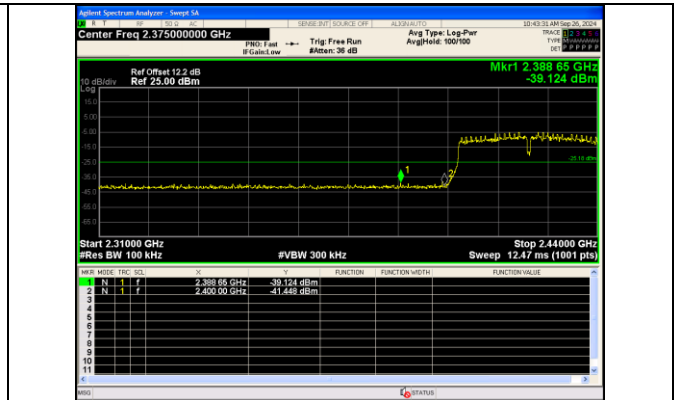


**Out Of Band Emission**  
IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0

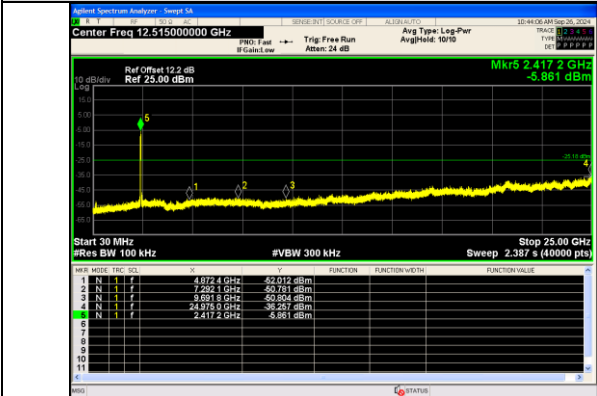


**30.0 MHz - 25000.0 MHz**  
IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0

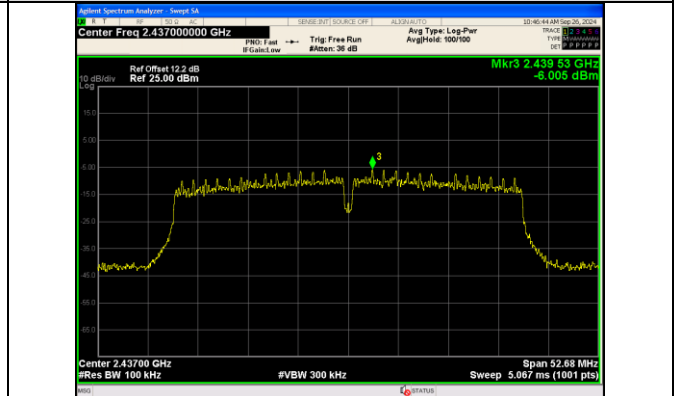


**In-Band Reference Level**  
IEEE 802.11n\_Channel 6\_40MHz\_Antenna 0

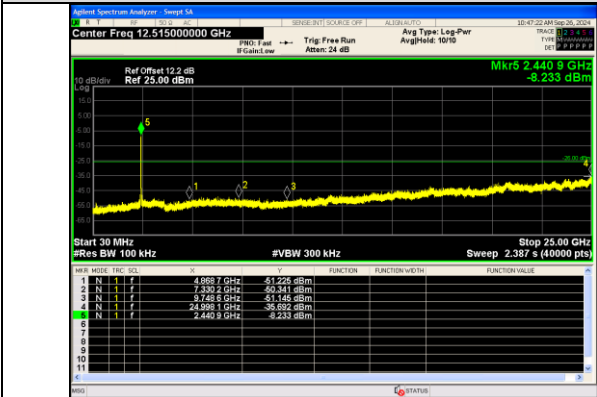


**30.0 MHz - 25000.0 MHz**  
IEEE 802.11n\_Channel 6\_40MHz\_Antenna 0

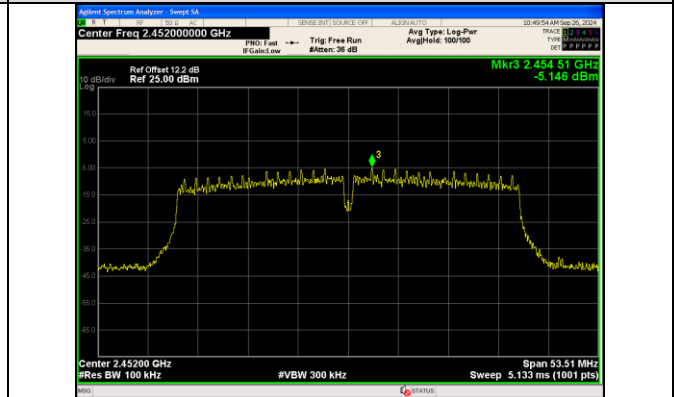

**In-Band Reference Level**  
IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0

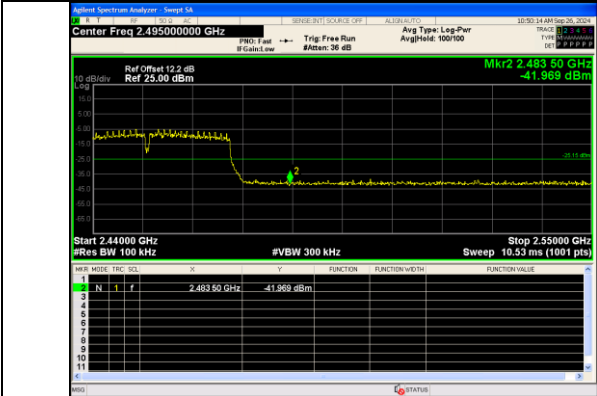

**Out Of Band Emission**  
IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0

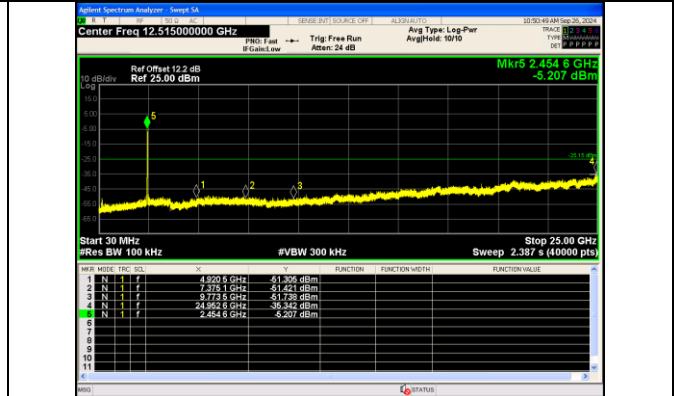

**30.0 MHz - 25000.0 MHz**  
IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0