

# TEST REPORT

**Product Name** : Enkl Sound ES2  
**Brand Mark** : ENKL  
**Model No.** : Enkl Sound ES2  
**FCC ID** : 2A8MI-ENKLES2  
**Report Number** : BLA-EMC-202311-A0603  
**Date of Sample Receipt** : 2023/11/2  
**Date of Test** : 2023/11/3 to 2023/11/6  
**Date of Issue** : 2023/11/14  
**Test Standard** : 47 CFR Part 15, Subpart C 15.247  
**Test Result** : Pass

Prepared for:

**Jiang Su Yisin Tech Co., Ltd**

**Rm. 103, Bldg. 1, No. 10, Wenzhou Rd., ETDZ, Shuyang County, Suqian,  
Jiangsu, CN**

Prepared by:

**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**

**Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,  
Shenzhen, Guangdong Province, China**

**TEL: +86-755-23059481**

Compiled by:

*Lucas*

Review by:

*Sueela*

Approved by:

*Blue Zheng*

Date:

2023/11/14



**REPORT REVISE RECORD**

Version No.	Date	Description
00	2023/11/14	Original

BlueAsia

## TABLE OF CONTENTS

<b>1 TEST SUMMARY .....</b>	<b>5</b>
<b>2 GENERAL INFORMATION .....</b>	<b>6</b>
<b>3 GENERAL DESCRIPTION OF E.U.T .....</b>	<b>6</b>
<b>4 OPERATION FREQUENCY EACH OF CHANNEL .....</b>	<b>7</b>
<b>5 TEST ENVIRONMENT .....</b>	<b>8</b>
<b>6 TEST MODE .....</b>	<b>8</b>
<b>7 MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>8 DESCRIPTION OF SUPPORT UNIT .....</b>	<b>9</b>
<b>9 LABORATORY LOCATION .....</b>	<b>9</b>
<b>10 TEST INSTRUMENTS LIST .....</b>	<b>10</b>
<b>11 ANTENNA REQUIREMENT .....</b>	<b>13</b>
11.1 CONCLUSION .....	13
<b>12 CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>14</b>
12.1 LIMITS .....	14
12.2 BLOCK DIAGRAM OF TEST SETUP .....	15
12.3 TEST DATA .....	15
<b>13 RADIATED SPURIOUS EMISSIONS .....</b>	<b>16</b>
13.1 LIMITS .....	16
13.2 BLOCK DIAGRAM OF TEST SETUP .....	17
13.3 PROCEDURE .....	17
13.4 TEST DATA .....	19
<b>14 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS .....</b>	<b>27</b>
14.1 LIMITS .....	27
14.2 BLOCK DIAGRAM OF TEST SETUP .....	28
14.3 PROCEDURE .....	28
14.4 TEST DATA .....	30
<b>15 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ) .....</b>	<b>34</b>
15.1 LIMITS .....	34
15.2 BLOCK DIAGRAM OF TEST SETUP .....	34

15.3 PROCEDURE .....	34
15.4 TEST DATA .....	36
<b>16 CONDUCTED BAND EDGES MEASUREMENT .....</b>	<b>38</b>
16.1 LIMITS .....	38
16.2 BLOCK DIAGRAM OF TEST SETUP .....	39
16.3 TEST DATA .....	39
<b>17 MINIMUM 6DB BANDWIDTH .....</b>	<b>40</b>
17.1 BLOCK DIAGRAM OF TEST SETUP .....	40
17.2 TEST DATA .....	40
<b>18 CONDUCTED PEAK OUTPUT POWER .....</b>	<b>41</b>
18.1 LIMITS .....	41
18.2 BLOCK DIAGRAM OF TEST SETUP .....	41
18.3 EST DATA .....	42
<b>19 POWER SPECTRUM DENSITY .....</b>	<b>43</b>
19.1 LIMITS .....	43
19.2 BLOCK DIAGRAM OF TEST SETUP .....	43
19.3 TEST DATA .....	43
<b>20 APPENDIX .....</b>	<b>44</b>
20.1 MAXIMUM CONDUCTED OUTPUT POWER .....	44
20.2 -6DB BANDWIDTH .....	48
20.3 OCCUPIED CHANNEL BANDWIDTH .....	52
20.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	56
20.5 CONDUCTED RF SPURIOUS EMISSION .....	60
20.6 BAND EDGE .....	67
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>72</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>73</b>

## 1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass

Remark:

N/A: Not Applicable

## 2 GENERAL INFORMATION

<b>Applicant</b>	Jiang Su Yisin Tech Co., Ltd
<b>Address</b>	Rm. 103, Bldg. 1, No. 10, Wenzhou Rd., ETDZ, Shuyang County, Suqian, Jiangsu, CN
<b>Manufacturer</b>	Enkl Sound Copenhagen ApS
<b>Address</b>	Fruebjergvej 3, 2100 Copenhagen, Denmark
<b>Factory</b>	Shenzhen Asia Universal Technology Co., Ltd.
<b>Address</b>	Room 05, 22nd Floor, Yishang Center, No. 22, Jiaan South Road, Baoan District, Shenzhen, China
<b>Product Name</b>	Enkl Sound ES2
<b>Test Model No.</b>	Enkl Sound ES2

## 3 GENERAL DESCRIPTION OF E.U.T.

<b>Hardware Version</b>	V1.1
<b>Software Version</b>	N/A
<b>Operation Frequency:</b>	2402MHz-2480MHz
<b>Data Rate</b>	1Mbps;2Mbps
<b>Modulation Type:</b>	GFSK
<b>Channel Spacing:</b>	2MHz
<b>Number of Channels:</b>	40
<b>Antenna Type:</b>	FPC Antenna
<b>Antenna Gain:</b>	3dBi(Provided by the customer)

#### 4 OPERATION FREQUENCY EACH OF CHANNEL

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2442MHz
The Highest channel	2480MHz

## 5 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	24°C	DC 5V

## 6 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation

Remark: Only the data of the worst mode would be recorded in this report, For Radiated' emission. 1Mbps and 2Mbps mode all have been tested, only worse case 1Mbps mode is reported.

## 7 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

## 8 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	lenovo	E46OC	N/A	From lab (No.BLA-ZC-BS-2022005)

## 9 LABORATORY LOCATION

All tests were performed at:  
BlueAsia of Technical Services(Shenzhen) Co.,Ltd.  
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province,  
China  
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673  
No tests were sub-contracted.

## 10 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2023/11/9
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Receiver	R&S	ESR7	101199	2023/08/30	2024/08/29
Receiver	R&S	ESPI7	101477	2023/07/07	2024/07/06
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/10/12	2025/10/11
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Horn Antenna	Schwarzbeck	BBHA 9170	1106	2022/04/24	2024/04/23
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2023/07/07	2024/07/06
Amplifier	SKET	PA-000318G-45	N/A	2023/08/30	2024/08/29
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2023/07/14	2024/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/09/14	2025/09/13
1kHz calibration audio source	SKET	MCS-ABT-C35	N/A	2023/09/04	2024/09/03
Free Field Microphone	SKET	MGS MP 663	0414	2023/09/04	2024/09/03
Audio shielding box	SKET	SB-ABT-C35	N/A	2023/03/30	2024/03/29
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A

Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A
Signal Generator DTV	ECREDIX	DSG-1000	N/A	N/A	N/A

<b>Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal.Date</b>	<b>Cal.Due</b>
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2023/08/30	2024/08/29
LISN	R&S	ENV216	3560.6550.15	2023/08/30	2024/08/29
LISN	AT	AT166-2	AKK1806000003	2023/08/30	2024/08/29
ISN	TESEQ	ISNT8-cat6	53580	2023/08/30	2024/08/29
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2023/07/07	2024/07/06
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

<b>Test Equipment Of RF Conducted Test</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal.Date</b>	<b>Cal.Due</b>
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY49100060	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY54420161	2023/08/30	2024/08/29
Signal Generator	Agilent	N5182A	MY47420955	2023/08/30	2024/08/29
Signal Generator	Agilent	N5181A	MY46240904	2023/07/07	2024/07/06
Signal Generator	R&S	CMW500	132429	2023/08/30	2024/08/29
BluetoothTester	Anritsu	MT8852B	06262047872	2023/08/30	2024/08/29

Power probe	DARE	RPR3006W	14I00889SN042	2023/09/01	2024/08/31
Power detection box	CDKMV	MW100-PSB	MW201020JYT	2023/07/07	2024/07/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2023/08/30	2024/08/29
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2023/08/30	2024/08/29
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audio Precision	ATS-1	ATS141094	2023/07/07	2024/07/06

## 11 ANTENNA REQUIREMENT

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	N/A


### 11.1 CONCLUSION

#### Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3dBi.

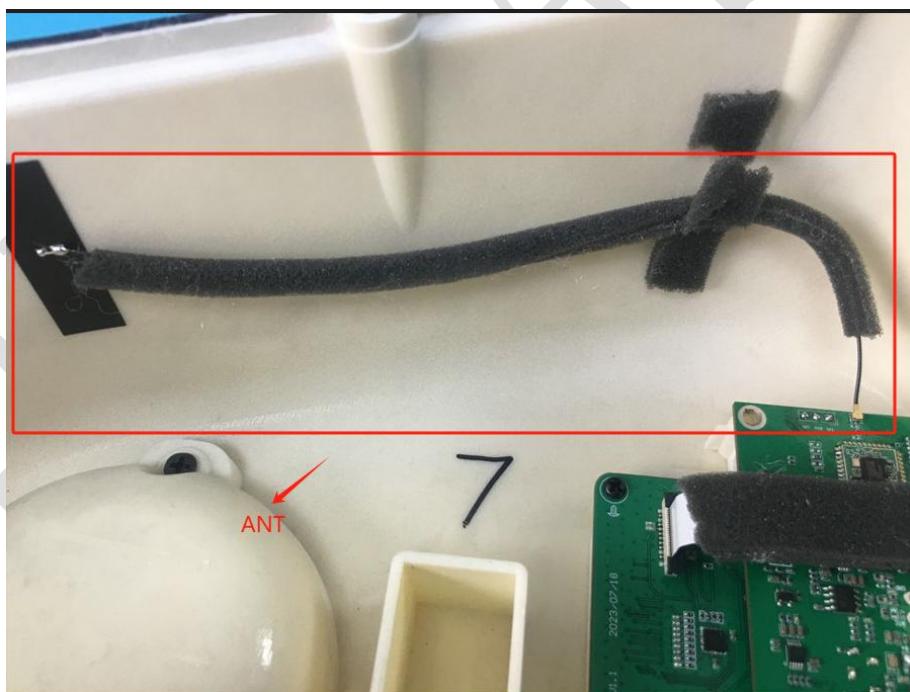


## 12 CONDUCTED SPURIOUS EMISSIONS

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	William
<b>Temperature</b>	25 °C
<b>Humidity</b>	60%

### 12.1 LIMITS

<b>Limit:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

## 12.2 BLOCK DIAGRAM OF TEST SETUP

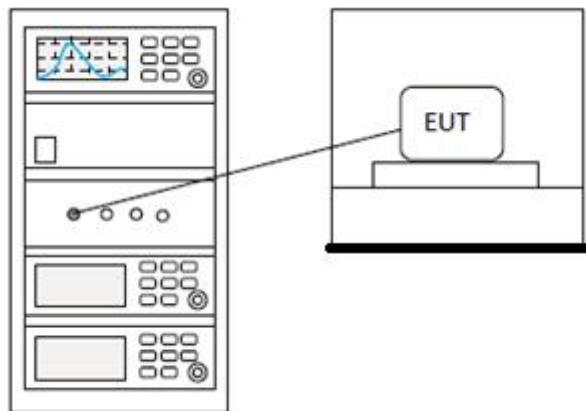

## 12.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

## 13 RADIATED SPURIOUS EMISSIONS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.4,6.5,6.6
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	William
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 13.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 13.2 BLOCK DIAGRAM OF TEST SETUP

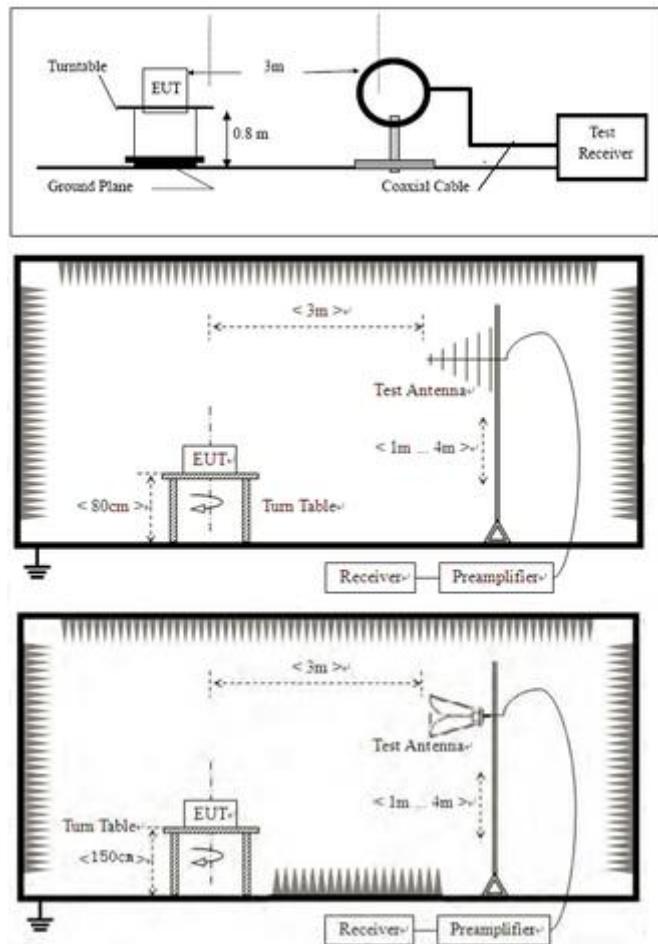

### 13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


### 13.4 TEST DATA

Below 1GHz

[TestMode: TX ]; [Polarity: Horizontal]

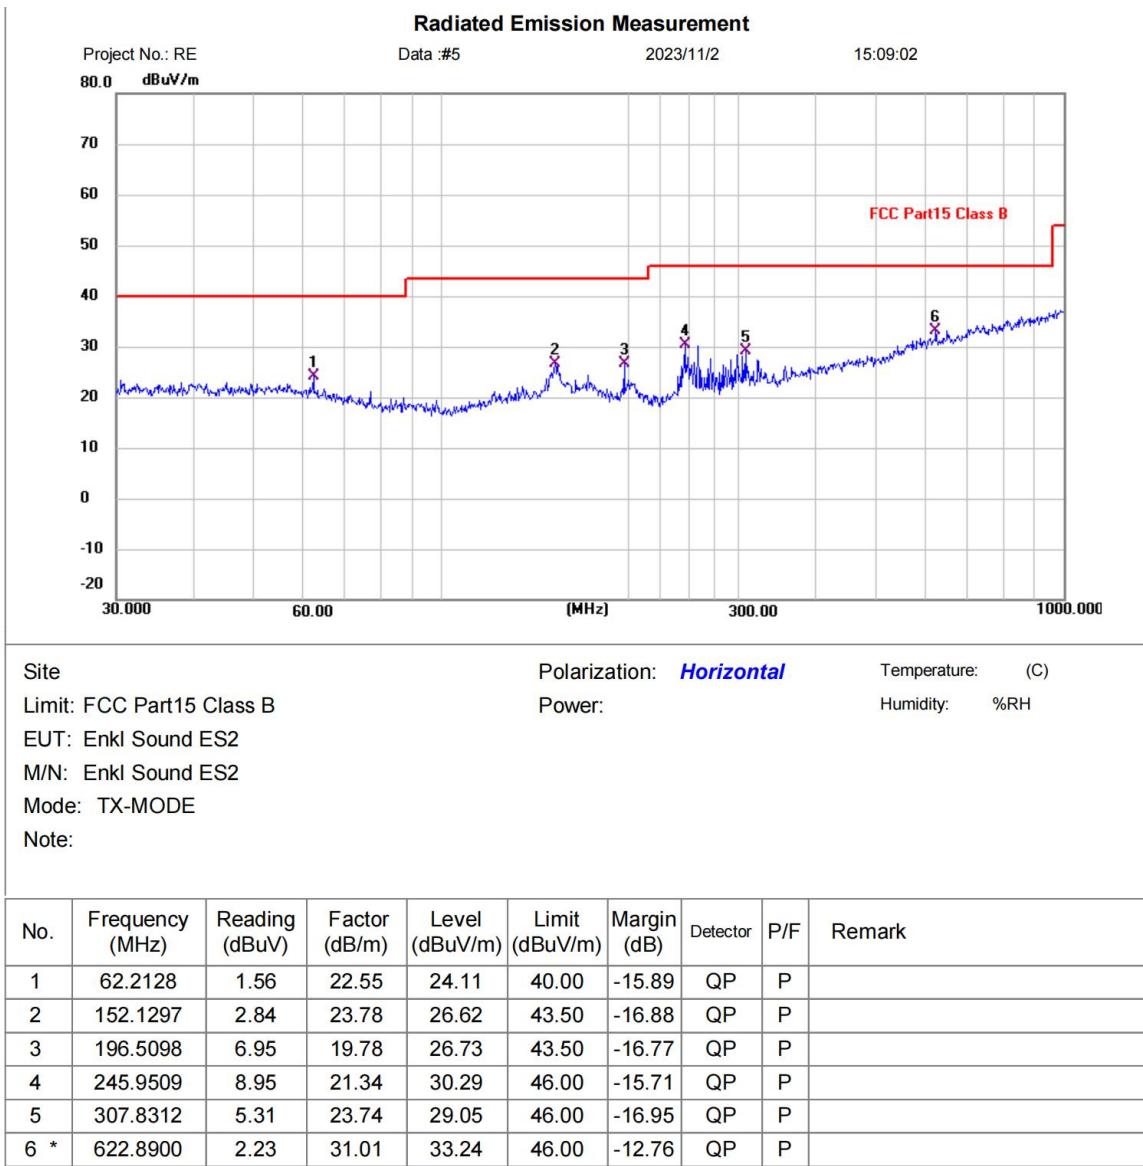


**Test Result: Pass**

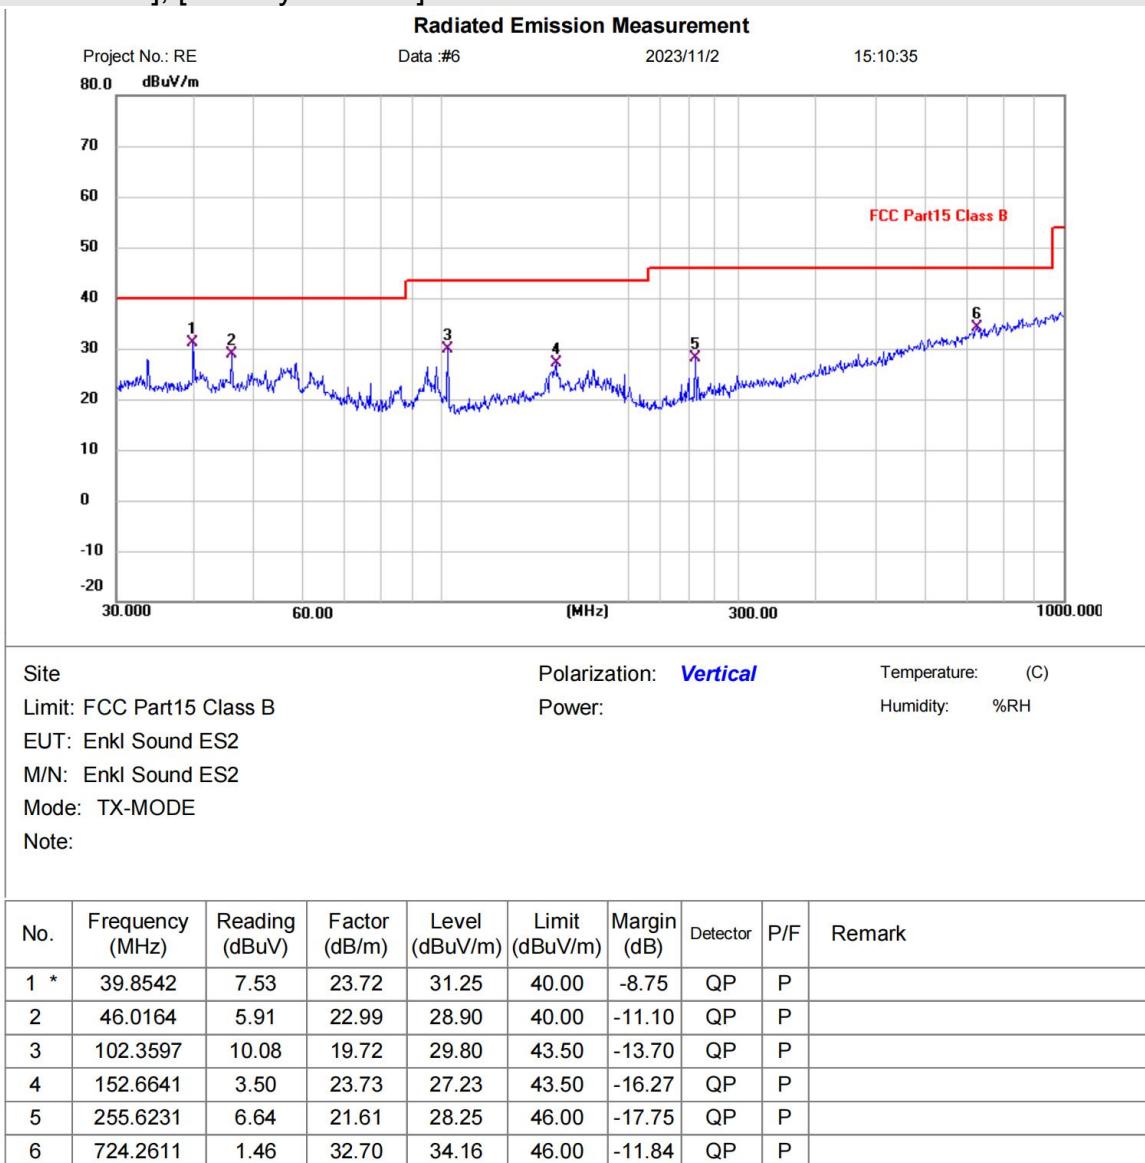**[TestMode: TX]; [Polarity: Vertical]**

**Test Result: Pass**

Above 1GHz

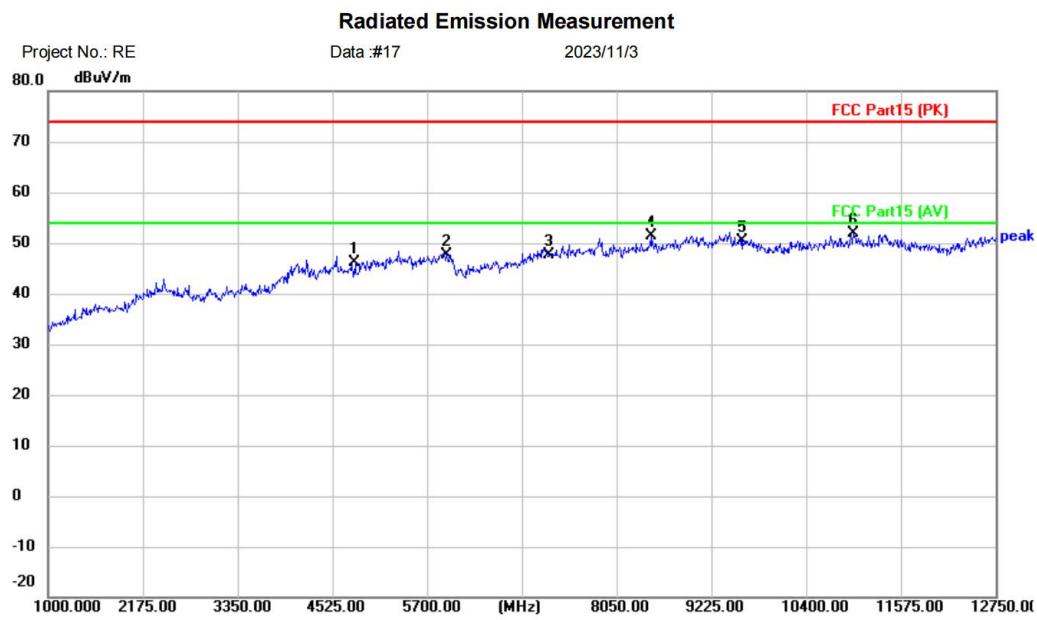[TestMode: TX lowest channel]; [Polarity: Horizontal]



Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Enkl Sound ES2

M/N: Enkl Sound ES2


Mode: TX-BLE-2402

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		4804.000	40.51	5.64	46.15	74.00	-27.85	peak	
2		5946.750	38.94	8.71	47.65	74.00	-26.35	peak	
3		7206.000	38.33	9.24	47.57	74.00	-26.43	peak	
4		8473.000	40.67	10.77	51.44	74.00	-22.56	peak	
5		9608.000	37.96	12.31	50.27	74.00	-23.73	peak	
6	*	10987.50	38.46	13.44	51.90	74.00	-22.10	peak	

**Test Result: Pass**

[TestMode: TX lowest channel]; [Polarity: Vertical]

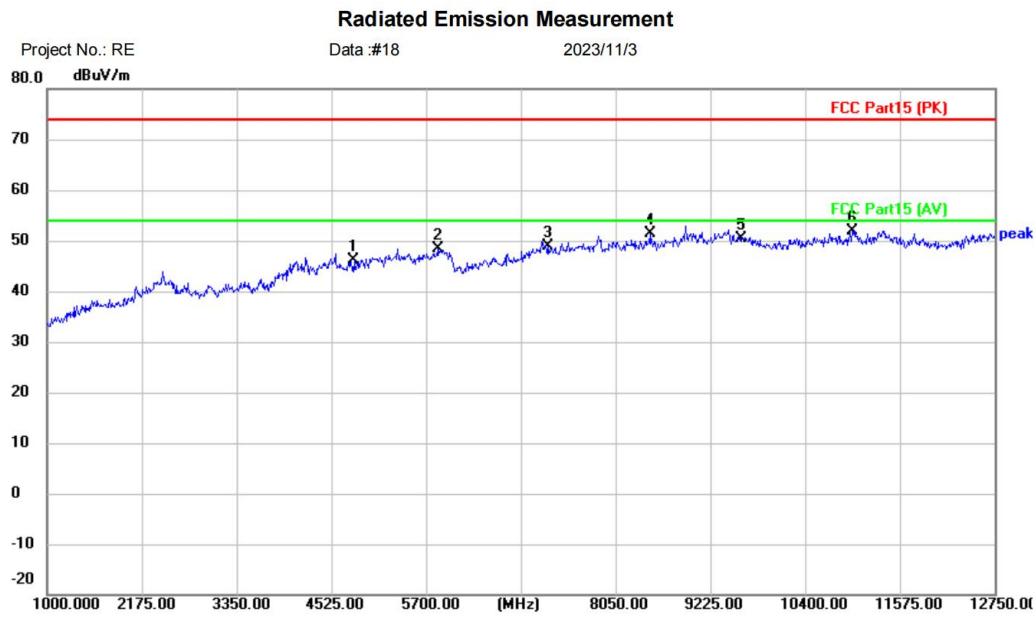

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Enkl Sound ES2

M/N: Enkl Sound ES2


Mode: TX-BLE-2402

Note:

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV/m	dBuV/m	dB		
1	4804.000	40.51	5.64	46.15	74.00	-27.85	peak	
2	5841.000	39.95	8.31	48.26	74.00	-25.74	peak	
3	7206.000	39.56	9.24	48.80	74.00	-25.20	peak	
4	8473.000	40.67	10.77	51.44	74.00	-22.56	peak	
5	9608.000	37.96	12.31	50.27	74.00	-23.73	peak	
6 *	10987.50	38.46	13.44	51.90	74.00	-22.10	peak	

**Test Result: Pass**

[TestMode: TX middle channel]; [Polarity: Horizontal]

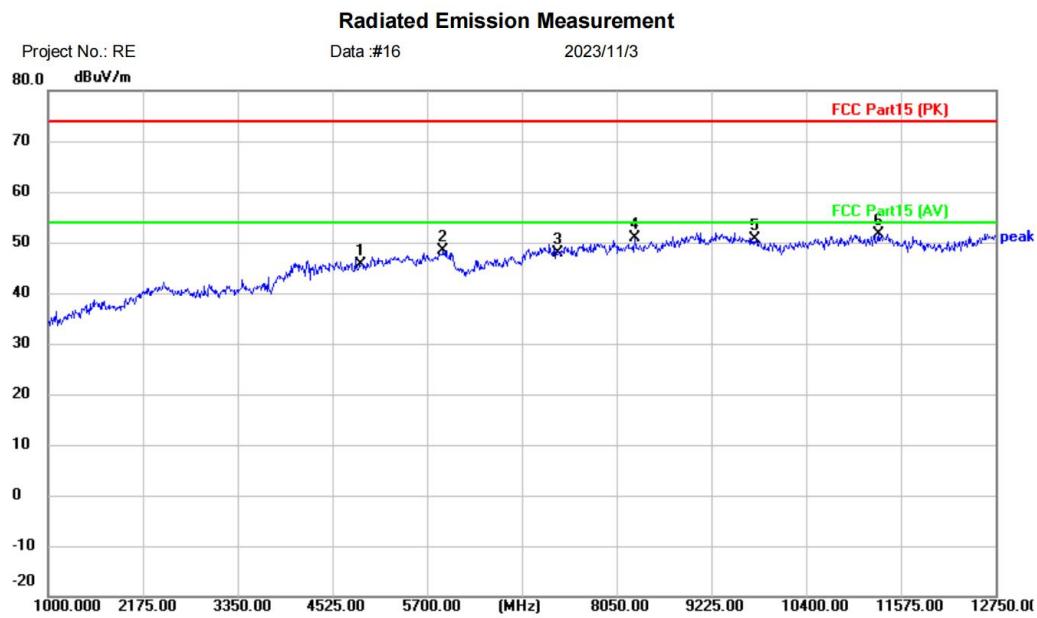

Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Enkl Sound ES2

M/N: Enkl Sound ES2


Mode: TX-BLE-2442

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dB <sub>uV</sub>	dB	dB <sub>uV/m</sub>	dB <sub>uV/m</sub>	dB	Detector	Comment
1		4884.000	39.81	5.75	45.56	74.00	-28.44	peak	
2		5899.750	39.84	8.66	48.50	74.00	-25.50	peak	
3		7326.000	38.37	9.43	47.80	74.00	-26.20	peak	
4		8273.250	40.86	10.05	50.91	74.00	-23.09	peak	
5		9768.000	38.41	12.22	50.63	74.00	-23.37	peak	
6	*	11293.00	39.02	12.70	51.72	74.00	-22.28	peak	

**Test Result: Pass**

[TestMode: TX middle channel]; [Polarity: Vertical]

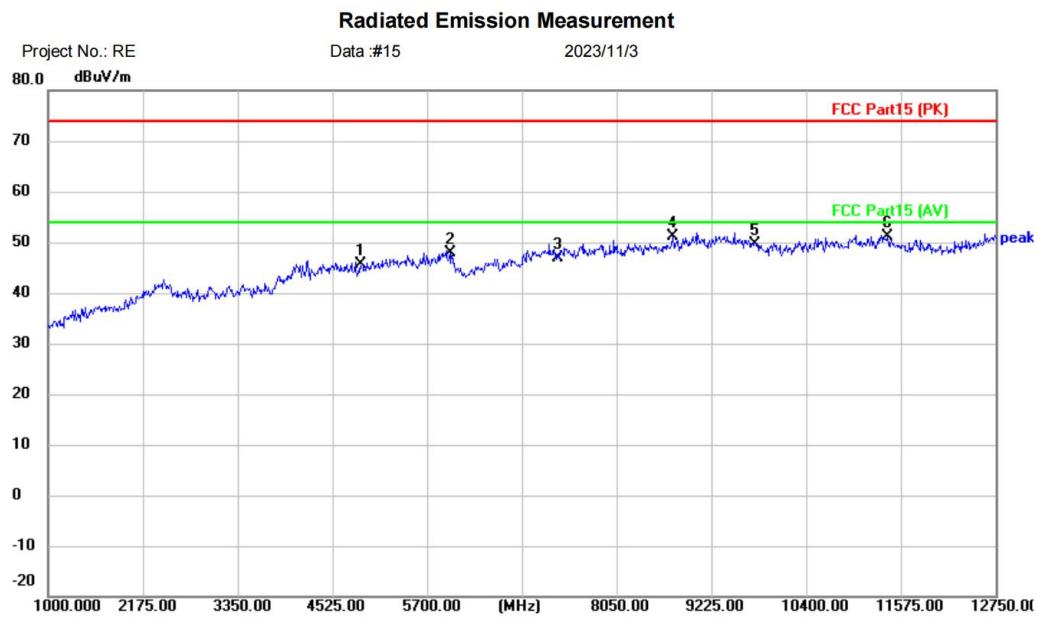

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Enkl Sound ES2

M/N: Enkl Sound ES2

Mode: TX-BLE-2442


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dB <sub>uV</sub>	dB	dB <sub>uV/m</sub>	dB <sub>uV/m</sub>	dB	Detector	Comment
1		4884.000	39.81	5.75	45.56	74.00	-28.44	peak	
2		5982.000	39.02	8.74	47.76	74.00	-26.24	peak	
3		7326.000	37.54	9.43	46.97	74.00	-27.03	peak	
4		8743.250	39.62	11.57	51.19	74.00	-22.81	peak	
5		9768.000	37.40	12.22	49.62	74.00	-24.38	peak	
6	*	11410.50	38.64	12.61	51.25	74.00	-22.75	peak	

**Test Result: Pass**

[TestMode: TX highest channel]; [Polarity: Horizontal]

**Radiated Emission Measurement**

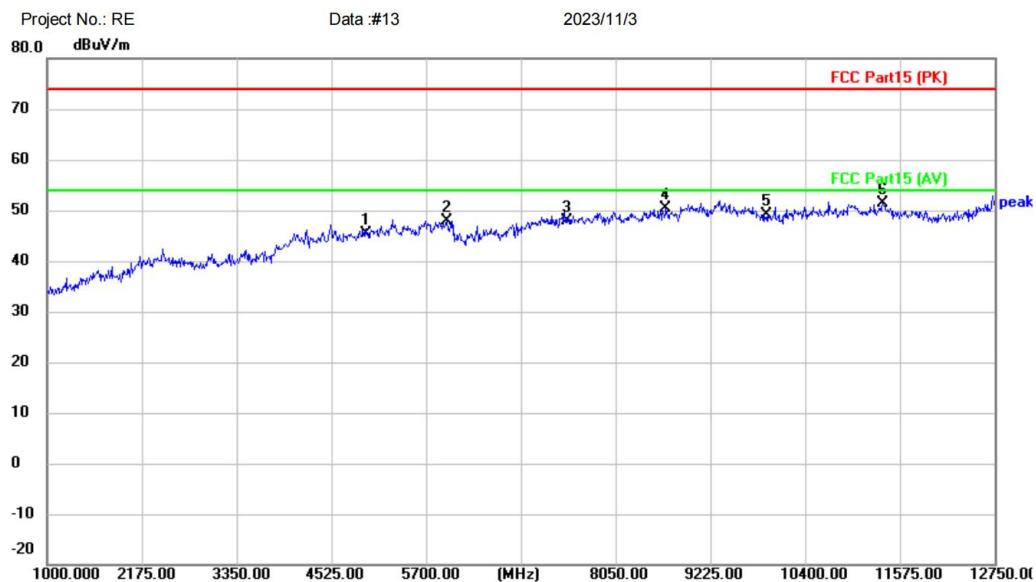

Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Enkl Sound ES2

M/N: Enkl Sound ES2


Mode: TX-BLE-2480

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		4960.000	38.66	6.60	45.26	74.00	-28.74	peak	
2		5958.500	39.27	8.72	47.99	74.00	-26.01	peak	
3		7440.000	38.35	9.64	47.99	74.00	-26.01	peak	
4		8672.750	39.02	11.40	50.42	74.00	-23.58	peak	
5		9920.000	36.96	12.14	49.10	74.00	-24.90	peak	
6	*	11363.50	38.76	12.65	51.41	74.00	-22.59	peak	

**Test Result: Pass**

[TestMode: TX highest channel]; [Polarity: Vertical]

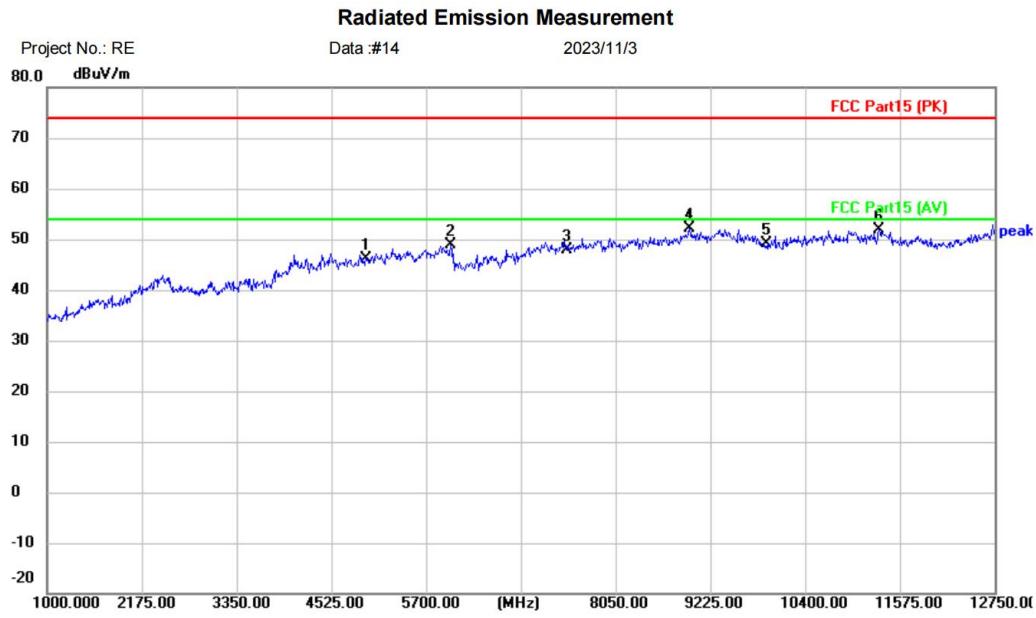

Site	Polarization: <b>Vertical</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Enkl Sound ES2		
M/N: Enkl Sound ES2		
Mode: TX-BLE-2480		
Note:		

No.	Mk.	Freq.	Reading	Correct	Measure	Limit	Over	Comment
			Level	Factor	ment			
			MHz	dBuV	dB	dBuV/m	dB	Detector
1		4960.000	39.56	6.60	46.16	74.00	-27.84	peak
2		6005.500	43.21	5.61	48.82	74.00	-25.18	peak
3		7440.000	38.35	9.64	47.99	74.00	-26.01	peak
4	*	8966.500	39.79	12.32	52.11	74.00	-21.89	peak
5		9920.000	36.96	12.14	49.10	74.00	-24.90	peak
6		11316.50	39.20	12.69	51.89	74.00	-22.11	peak

## Test Result: Pass

## 14 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.10.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	William
<b>Temperature</b>	25 °C
<b>Humidity</b>	60%

### 14.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 14.2 BLOCK DIAGRAM OF TEST SETUP

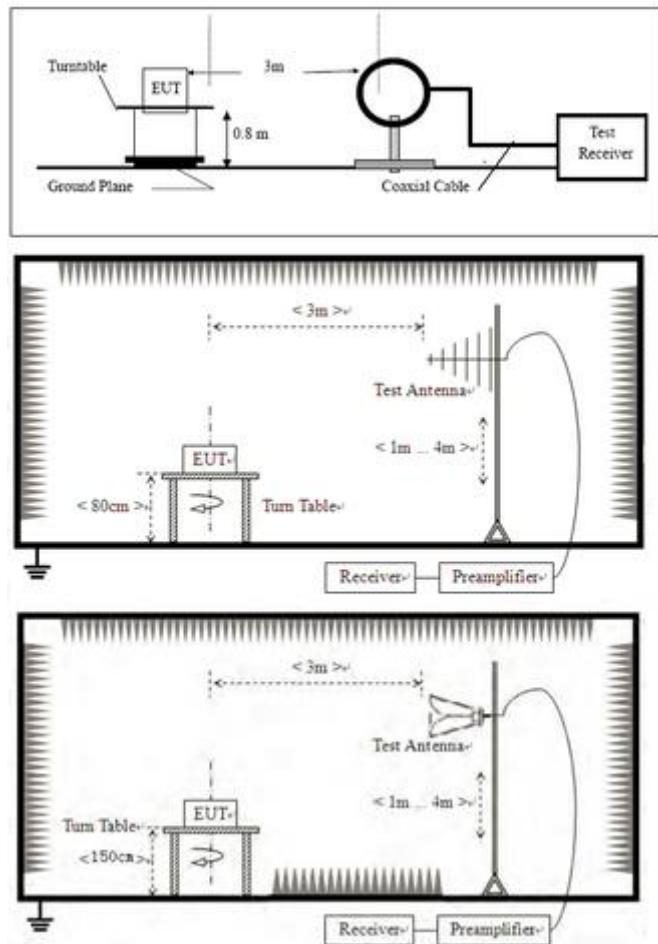

## 14.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

#### 14.4 TEST DATA

[TestMode: TX lowest channel]; [Polarity: Horizontal]

##### Radiated Emission Measurement

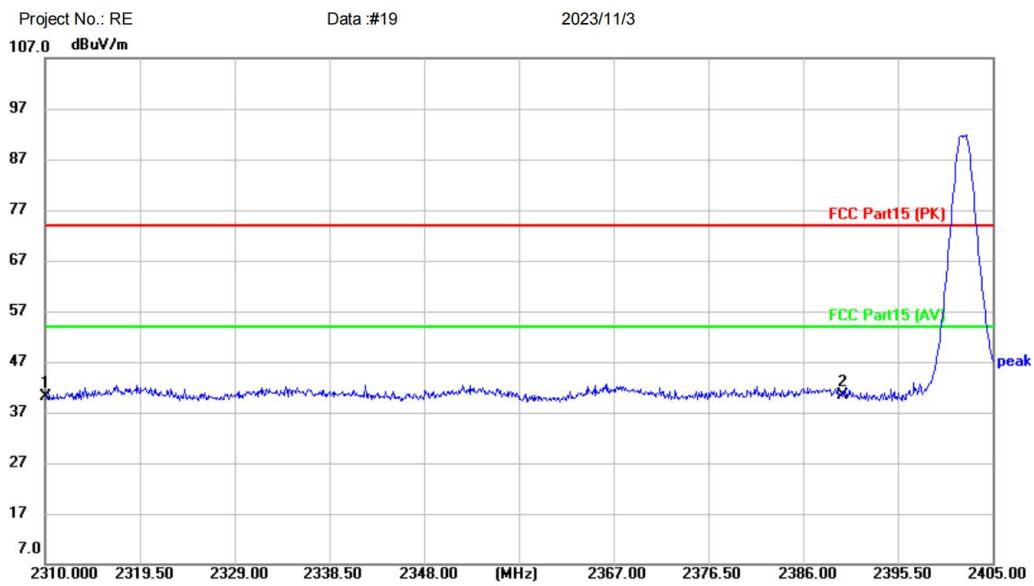

Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Enkl Sound ES2

M/N: Enkl Sound ES2


Mode: TX-BLE-2402

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		2310.000	43.09	-2.89	40.20	74.00	-33.80	peak	
2	*	2390.000	43.05	-2.70	40.35	74.00	-33.65	peak	

**Test Result: Pass**

[TestMode: TX lowest channel]; [Polarity: Vertical]

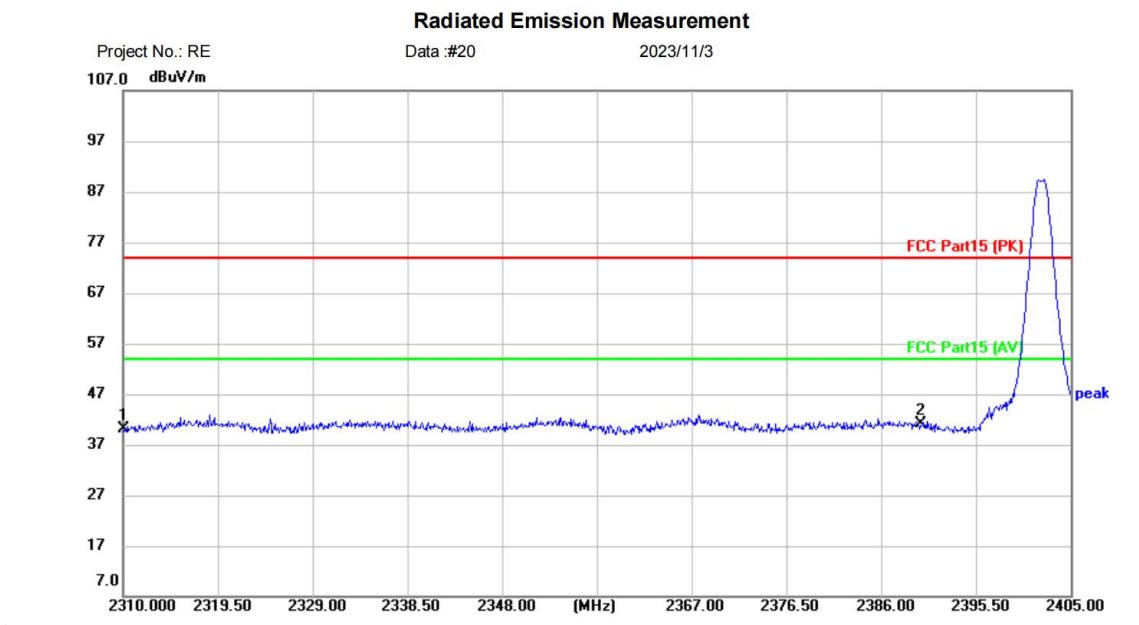


Site: Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature: (C)  
EUT: Enkl Sound ES2 Power: Humidity: %RH  
M/N: Enkl Sound ES2  
Mode: TX-BLE-2402  
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2310.000	42.90	-2.89	40.01	74.00	-33.99	peak	
2	*	2390.000	43.94	-2.70	41.24	74.00	-32.76	peak	

## Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

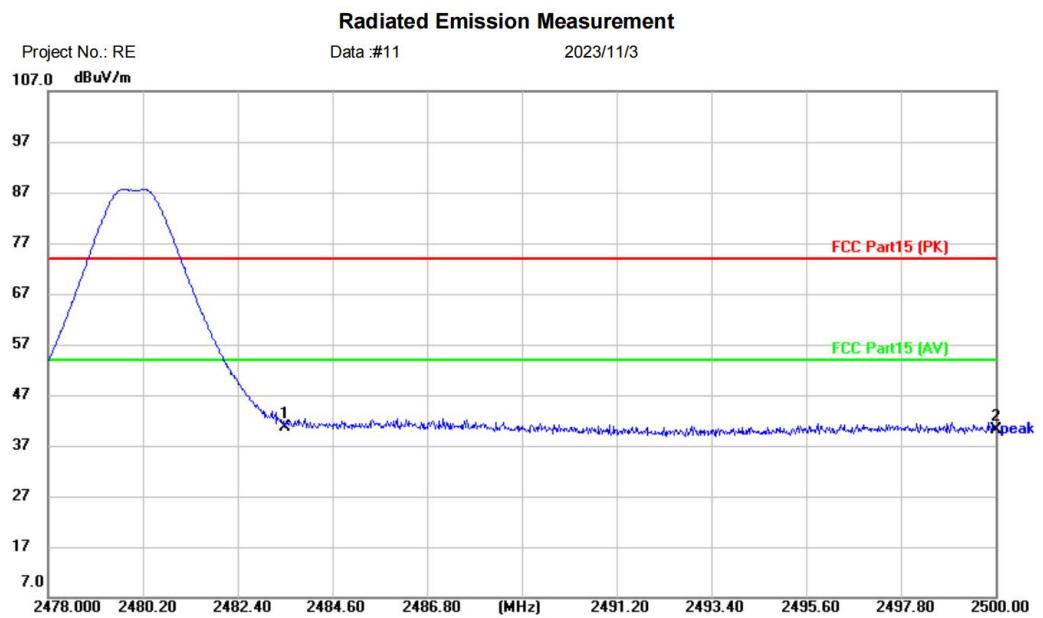

---

### Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Enkl Sound ES2

M/N: Enkl Sound ES2

Mode: TX-BLE-2480

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over			
			Level	Factor	ment		Detector	Comment		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	43.56	-2.91	40.65	74.00	-33.35	peak		
2		2500.000	43.07	-3.00	40.07	74.00	-33.93	peak		

## Test Result: Pass


[TestMode: TX highest channel]; [Polarity: Vertical]

## Radiated Emission Measurement

Project No.: RE

Data :#12

2023/11/3

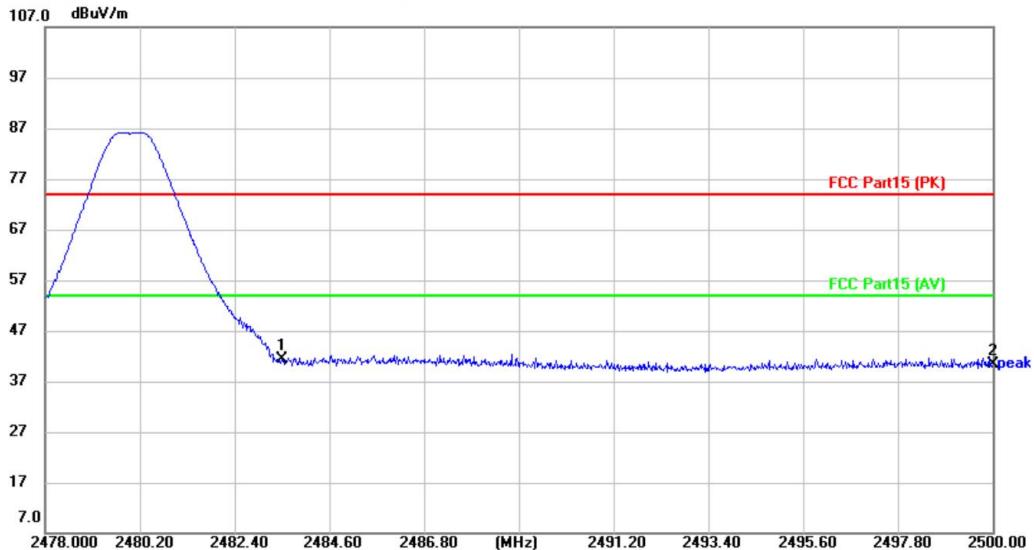

---

### Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Enkl Sound ES2

M/N: Enkl Sound ES2

Mode: TX-BLE-2480

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over			
			Level	Factor	ment		Detector	Comment		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	44.23	-2.91	41.32	74.00	-32.68	peak		
2		2500.000	43.33	-3.00	40.33	74.00	-33.67	peak		

## Test Result: Pass

## 15 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	William
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 15.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 15.2 BLOCK DIAGRAM OF TEST SETUP

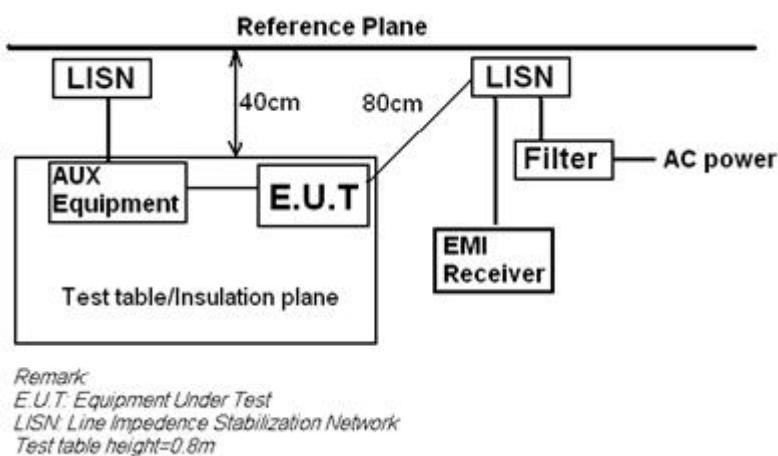

### 15.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And


for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,  
4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.  
5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

## 15.4 TEST DATA


[TestMode: TX mode]; [Line: Line];[Power:120V/60Hz]

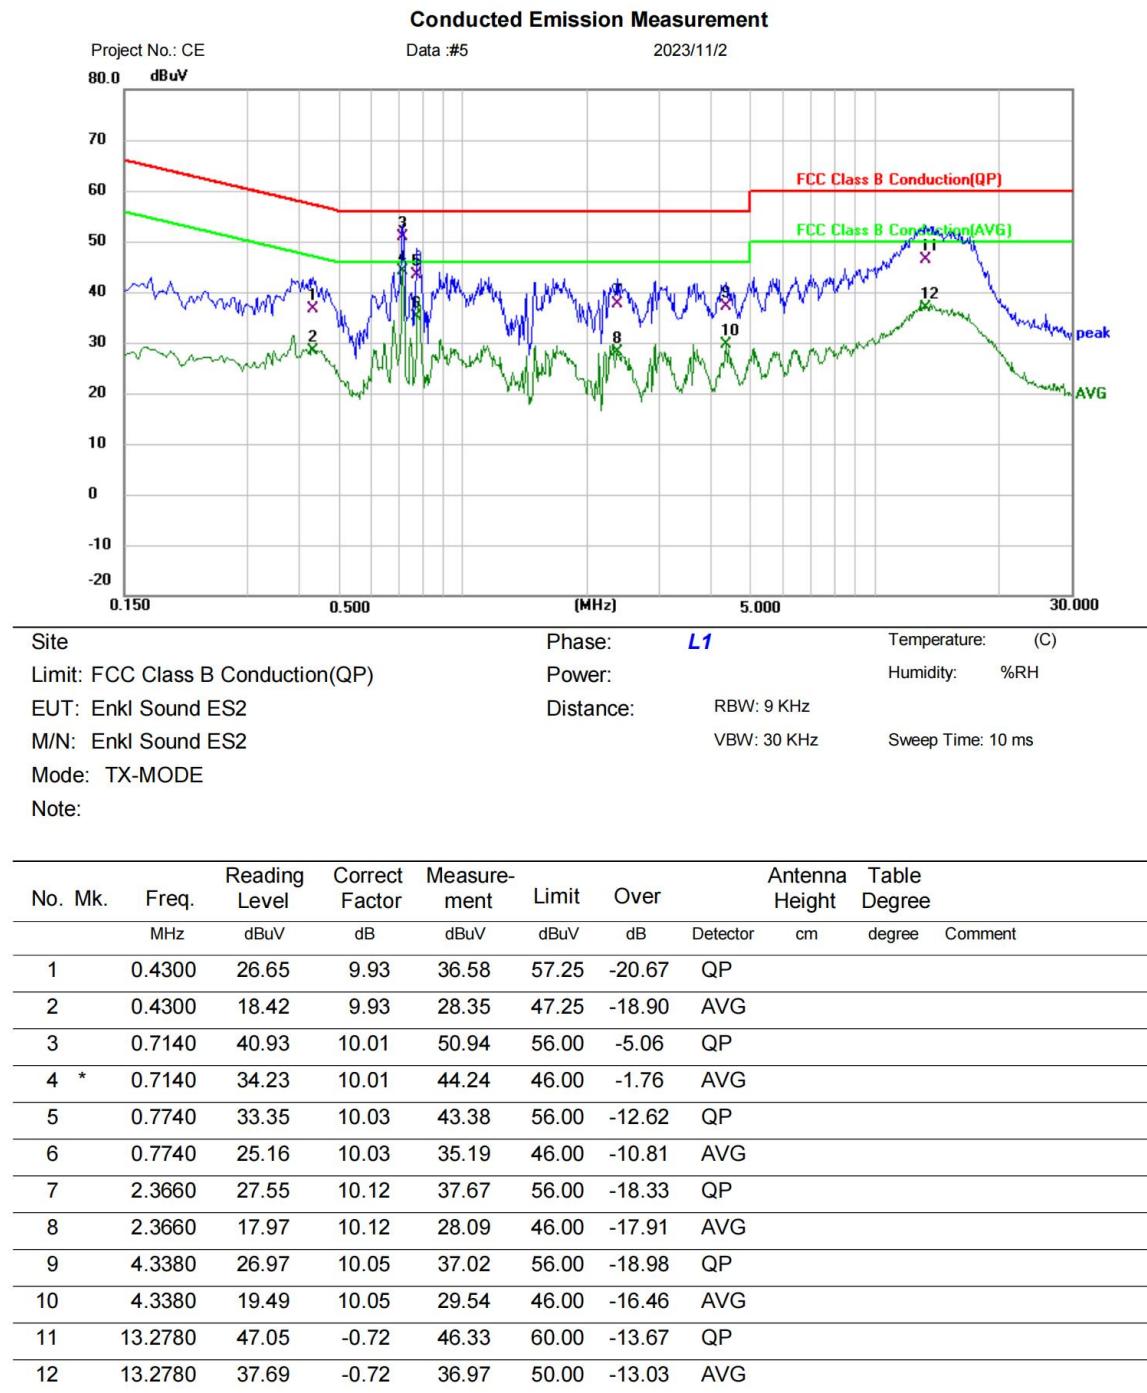

**Test Result: Pass**

[TestMode: TX mode]; [Line: Nutral];[Power:120V/60Hz]

## Conducted Emission Measurement

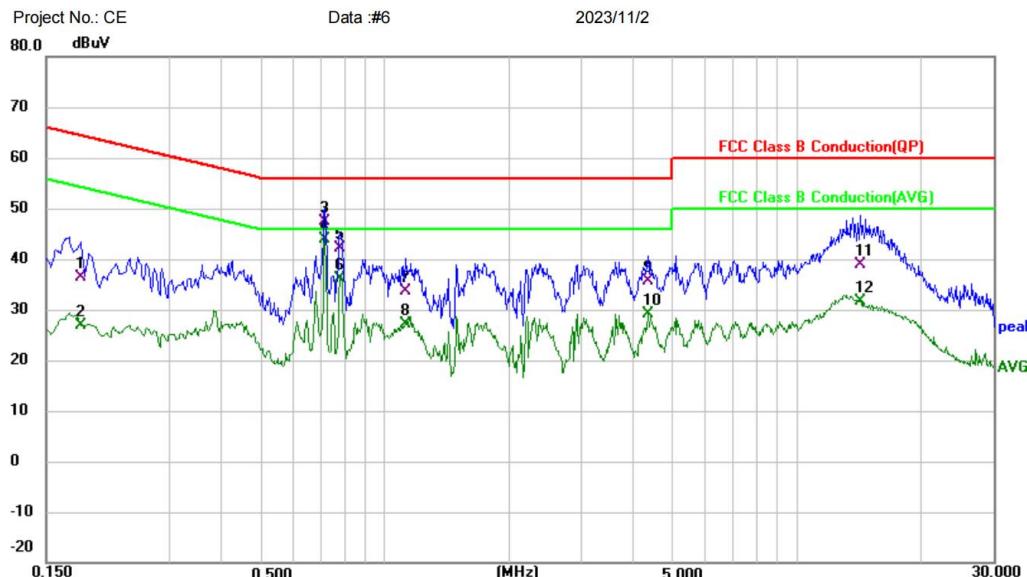

Site: **N**      Phase: **N**      Temperature: (C)  
Limit: FCC Class B Conduction(QP)      Power:      Humidity: %RH  
EUT: Enki Sound ES2      Distance: RBW: 9 KHz  
M/N: Enki Sound ES2      VBW: 30 KHz      Sweep Time: 10 ms  
Mode: TX-MODE  
Note:

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		dBuV	dB	dBuV	dBuV	dB	Detector	cm	
1	0.1819	26.10	10.17	36.27	64.40	-28.13	QP		
2	0.1819	16.75	10.17	26.92	54.40	-27.48	AVG		
3	0.7140	37.41	9.96	47.37	56.00	-8.63	QP		
4 *	0.7140	34.00	9.96	43.96	46.00	-2.04	AVG		
5	0.7780	32.28	9.92	42.20	56.00	-13.80	QP		
6	0.7780	26.32	9.92	36.24	46.00	-9.76	AVG		
7	1.1220	23.68	9.88	33.56	56.00	-22.44	QP		
8	1.1220	17.37	9.88	27.25	46.00	-18.75	AVG		
9	4.3460	25.39	10.16	35.55	56.00	-20.45	QP		
10	4.3460	18.93	10.16	29.09	46.00	-16.91	AVG		
11	14.2220	40.35	-1.42	38.93	60.00	-21.07	QP		
12	14.2220	33.07	-1.42	31.65	50.00	-18.35	AVG		

**Test Result: Pass**


## 16 CONDUCTED BAND EDGES MEASUREMENT

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	William
<b>Temperature</b>	25 °C
<b>Humidity</b>	60%

### 16.1 LIMITS

<b>Limit:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

## 16.2 BLOCK DIAGRAM OF TEST SETUP

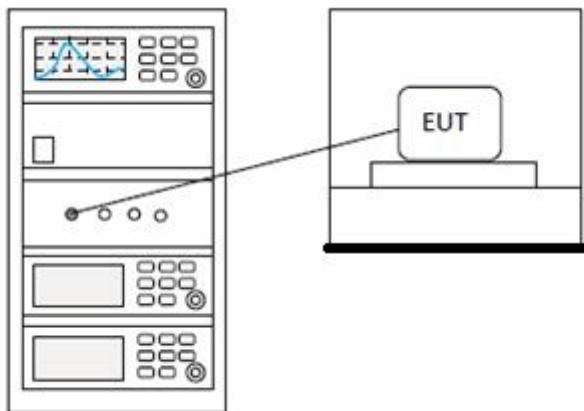


## 16.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

## 17 MINIMUM 6DB BANDWIDTH

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.7
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	William
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 17.1 BLOCK DIAGRAM OF TEST SETUP

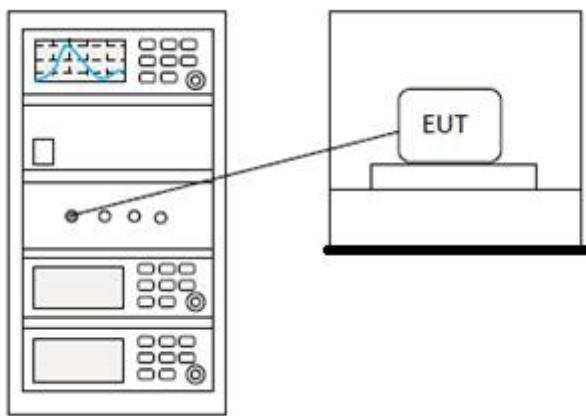

### 17.2 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**