

Radio Satellite Communication
Untertürkheimer Straße 6-10 . D-66117 Saarbrücken
Telefon: +49 (0)681 598-0 Telefax: - 9075

Test report No.: 2-3623-01-02/04 This test report consists of 97 pages Page 1 (97)

Recognized by the
Federal Communications Commission
Anechoic Chamber Registration No.: 90462 (FCC)
Anechoic Chamber Registration No.: 3463 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 081/94-D0



Independent ETSI
compliance test house



Test Report No.: 2-3623-01-02/04
Applicant: Sony Ericsson Mobile
Type: FAB-1031012-xx
Test Standards: FCC Part 22, 24
RSS132, 133
FCC ID: PY7FB031012
IC: 4170B-FB031012

Table of Contents

1	GENERAL INFORMATION.....	3
1.1	NOTES.....	3
1.2	TESTING LABORATORY.....	3
1.3	DETAILS OF APPLICANT.....	4
1.4	APPLICATION DETAILS.....	4
1.6	TEST STANDARDS.....	6
2	STATEMENT OF COMPLIANCE.....	7
2.1	SUMMARY OF MEASUREMENT RESULTS.....	7
2.1.1	PCS1900.....	7
2.1.2	GSM 850.....	7
3	MEASUREMENTS AND RESULTS.....	8
3.1	PART PCS 1900.....	8
3.1.1	RF Power Output.....	8
3.1.2	Frequency Stability.....	12
3.1.3	Radiated Emissions.....	15
3.1.4	Receiver Radiated Emissions.....	22
3.1.5	Conducted Spurious Emissions.....	26
3.1.6	Block Edge Compliance.....	30
3.1.7	Occupied Bandwidth.....	32
3.2	PART GSM 850.....	39
3.2.1	RF Power Output.....	39
3.2.2	Frequency Stability.....	42
3.2.3	Radiated Emissions.....	45
3.2.4	Receiver Radiated Emissions.....	52
3.2.5	Conducted Spurious Emissions.....	56
3.2.6	Block Edge Compliance.....	60
3.2.7	Occupied Bandwidth.....	63
3.2.8	Mobile Emissions in the Base Frequency Range.....	70
4	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....	78
	ANNEX A: Part 15 B Tests.....	80
	ANNEX B: Test Setup Photos.....	82
	ANNEX C: External Photos.....	86
	ANNEX D: Internal Photos.....	90

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 3 (97)

1 GENERAL INFORMATION

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Testing Laboratory

CETECOM ICT Services GmbH
Untertürkheimer Straße 6 - 10
66117 Saarbrücken
Germany
Telephone: + 49 681 598 - 9100
Telefax: + 49 681 598 - 9075
E-mail: info@ict.cetecom.de
Internet: www.cetecom-ict.de

Accredited testing laboratory

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.


DAR registration number: TTI-P-G-081/94-DO

Listed by: Federal Communications Commission (FCC)
Identification/Registration No : 90462

Laboratory Manager :

2004-07-01	RSC 8431	Gillmann D	
Date	Section	Name	

Technical responsibility for area of testing:

2004-07-01	RSC 8412	Hausknecht D.	
Date	Section	Name	

1.3 Details of Applicant

Name: Sony Ericsson Mobile Communication AB
Address: Torshausgatan 27
City: 16494 Kista
Country: Sweden
Phone: + 46 8 50 87 79 01
Fax: + 46 8 40 43 43 0
Contact: Mia Jennhake
Phone: (46) 8 50 87 79 01
Fax: (46) 8 40 43 43 0
e-mail: Mia.jenhake@sonyericsson.com

1.4 Application Details

Date of test: 2004-06-29 to 2004-07-02

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 5 (97)

1.5 Test Item

Type of equipment: Mobile Phone GSM 850 / 1800 / 1900 (with Bluetooth)
Type name: FAB-1031012-XX

Manufacturer: Sony Ericsson Mobile Communication AB
Address: Torshausgatan 27
City: 16494 Kista
Country: Sweden

Frequency **Part 850**: 824.2 – 848.8 MHz
Type of modulation: 200KQ7W
Number of channels: 125
Output power : cond.: 32.7 dBm Peak, ERP: 28.5 dBm (Burst)
Transmitter Spurious (worst case) μ W (noise floor)
Receiver Spurious (worst case) μ V/m @ 3m

Frequency **Part 1900**: 1850.2 – 1909.8 MHz
Type of modulation: 300KGXW
Number of channels: 300
Output power GSM 1900: cond : 31.1 dBm Peak, EIRP: 28.0 dBm (Burst)
Transmitter Spurious (worst case) μ W (noise floor)
Receiver Spurious (worst case) μ V/m @ 3m

Antenna: Integral antenna
Power supply (normal): 3,7 V DC Li-Polymer Battery
Power supply (extreme): 3.3 – 4.4 V DC

FCC ID: PY7FB031012
Certification No. IC: 4170B-FB031012
Open Area Test Site IC No.: 3436
IC Standards RSS132, Issue 1, RSS133, Issue 2, Rev. 1

ATTESTATION:

DECLARATION OF COMPLIANCE: I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory Manager :

2004.07.01
Date

RSC 8431
Section

Gillmann D.
Name

Signature



CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 6 (97)

Test Setup

Hardware: FP1
Software PDA: CXC162041 R1A21
Software Phone: CXC162050 R3E007

Mobile; S/N: ALW3PWTQ83 IMEI: 00460101-511522-2 (radiated measurements)
Mobile; S/N: ALW1PWTHD4 IMEI: 00460101-510414-5 (conducted measurements)

The radiated measurements were performed with an AC/DC charging unit :
Sony Ericsson Standard charger CST-13
BML 162099/1 R1A Type: 4020077-BV
Input 100 – 240V (AC)

1.6 Test Standards

FCC:	CFR Part 22 H CFR Part 24 E
IC:	RSS 132, Issue 1 RSS 133, Issue 2, Rev. 1

2 STATEMENT OF COMPLIANCE

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

2.1 Summary of Measurement Results

2.1.1 PCS1900

Section in this Report	Test Name	Verdict
3.1.1	RF Power Output	pass
3.1.2	Frequency Stability	pass
3.1.3	Radiated Emissions	pass
3.1.4	Receiver Radiated Emissions	pass
3.1.5	Conducted Spurious Emissions	pass
3.1.6	Block Edge Compliance	pass
3.1.7	Occupied Bandwidth	pass

2.1.2 GSM 850

Section in this Report	Test Name	Verdict
3.2.1	RF Power Output	pass
3.2.2	Frequency Stability	pass
3.2.3	Radiated Emissions	pass
3.2.4	Receiver Radiated Emissions	pass
3.2.5	Conducted Spurious Emissions	pass
3.2.6	Block Edge Compliance	pass
3.2.7	Occupied Bandwidth	pass
3.2.8	Mobile Emissions in the Base Frequency Range	pass

3 MEASUREMENTS AND RESULTS

For Part 24/22 we use the substitution method (TIA/EIA 603).

All measurements in this report are done in GSM mode. Device is able to transmit data in GPRS mode also. But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible. The only different is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link).

3.1 PART PCS 1900

3.1.1 RF Power Output

Reference

FCC:	CFR Part 24.232, 2.1046
IC:	RSS 133, Issue 2, Rev. 1, Section 6.2

Summary:

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range)

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

Test Results: Output Power (conducted)

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
1850.2	0	31.0	30.9
1880.0	0	31.1	31.0
1908.8	0	31.1	31.0
Measurement uncertainty		±0.5 dB	

EIRP Measurements**Description:**

This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) The measurements was performed with full rf output power and modulation.

(b) Test was performed at listed 3m test site (listed with FCC, IC).

(c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)

(d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.

(e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(f) Set the EMI Receiver as follows:

Center Frequency: test frequency

Resolution BW: 100 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

(g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.

(h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.

(j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.

(k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.

(l) Repeat for all different test signal frequencies

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency : equal to the signal source

Resolution BW : 10 kHz

Video BW : same

Detector Mode : positive

Average : off

Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna): DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 11 (97)

Limits:

Power Step	Burst PEAK EIRP (dBm)
0	<33

Test Results: Output Power (radiated)

Frequency (MHz)	Power Step	BURST PEAK EIRP (dBm)
1850.2	0	27.5
1880.0	0	28.0
1909.8	0	27.9
Measurement uncertainty	±3 dB	

Sample Calculation:

Freg	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result			
MHz	dBμV	dBm	dBi	dBd	dB	dBm			
1880.0	120.5	23.28	8.4	0.0	3.33	28.0			

$$\text{EIRP} = \text{SG (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dBi)}$$

3.1.2 Frequency Stability

Reference

FCC:	CFR Part 24.235, 2.1055
IC:	RSS 133, Issue 2, Rev. 1, Section 7

Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with nominal voltage, connected to the CMU 200 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal Voltage. Vary supply voltage from minimum Voltage to maximum Voltage, in steps re-measuring carrier frequency at each voltage. Pause at nominal Voltage . Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with nominal Voltage, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.8 V dc.

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01



Page 13 (97)

Measurement Results: AFC FREQ ERROR vs. VOLTAGE

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.3	-10	-0,00000053	-0,0053
3.4	-18	-0,00000096	-0,0096
3.5	-27	-0,00000144	-0,0144
3.6	-39	-0,00000207	-0,0207
3.7	-44	-0,00000234	-0,0234
3.8	-48	-0,00000255	-0,0255
3.9	-45	-0,00000239	-0,0239
4.0	-42	-0,00000223	-0,0223
4.1	-40	-0,00000213	-0,0213
4.2	-44	-0,00000234	-0,0234
4.3	-45	-0,00000239	-0,0239
4.4	-48	-0,00000255	-0,0255

Measurement Results: AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	-38	-0,00000202	-0,0202
-20	-42	-0,00000223	-0,0223
-10	-44	-0,00000234	-0,0234
±0.0	-40	-0,00000213	-0,0213
+10	-46	-0,00000245	-0,0245
+20	-44	-0,00000234	-0,0234
+30	-42	-0,00000223	-0,0223
+40	-45	-0,00000239	-0,0239
+50	-48	-0,00000255	-0,0255
+60	-43	-0,00000229	-0,0229

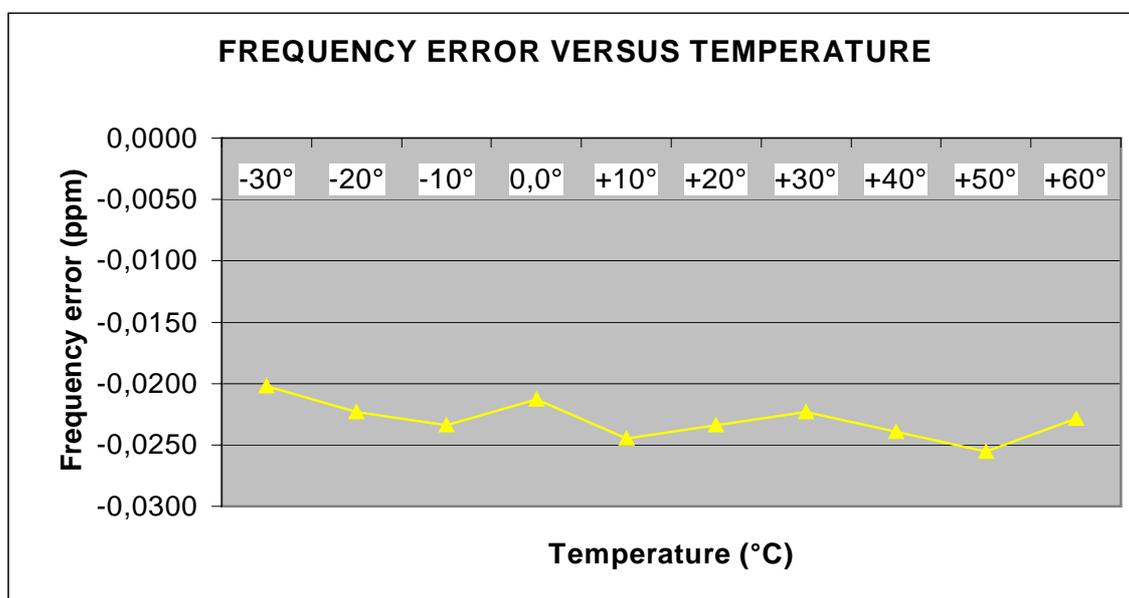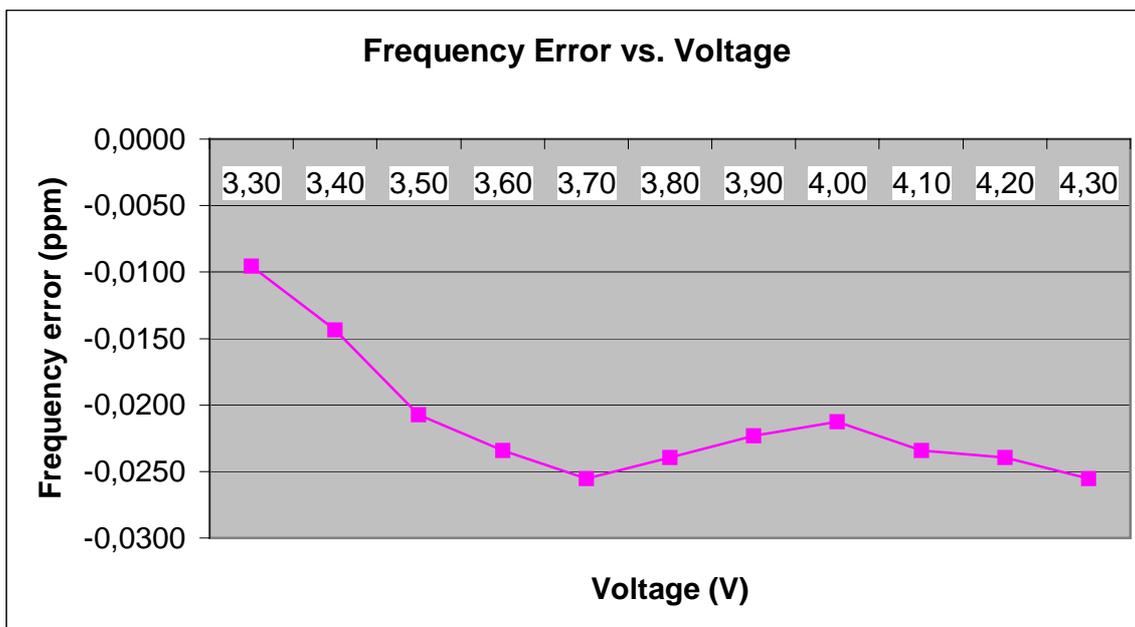

3.1.3 Radiated Emissions

Reference

FCC:	CFR Part 24.238, 2.1053
IC:	RSS 133, Issue 2, Rev. 1, Section 6.3

Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\text{Log}(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 16 (97)

Measurement Results: Radiated Emissions

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next table.

All measurements were done in horizontal and vertical polarization, the plots show the worst case. As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch.-512 Freq. (MHz)	Level (dBm)	Tx ch.-661 Freq. (MHz)	Level (dBm)	Tx ch.-810 Freq. (MHz)	Level (dBm)
2	3700.4	-	3760	-25.8	3819.6	-
3	5550.6	-	5640	-	5729.4	-
4	7400.8	-	7520	-	7639.2	-
5	9251.0	-	9400	-	9549.0	-
6	11101.2	-	11280	-	11458.8	-
7	12951.4	-	13160	-	13368.6	-
8	14801.6	-	15040	-	15278.4	-
9	16651.8	-	16920	-	17188.2	-
10	18502.0	-	18800	-	19098.0	-

Sample calculation:

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result			
MHz	dB μ V	dBm	dBi	dBd	dB	dBm			
3 760	-	-50.1	9.7	0.0	4.7	- 25.6			

EIRP = SG (dBm) - Cable Loss (dB) + Ant. gain (dBi)

CETECOM ICT Services GmbH


Test report No.: 2-3623-01-02/04

Date: 2004-07-01


Page 17 (97)

Magn. Field strength up to 30 MHz


Traffic mode (valid for all 3 channels)

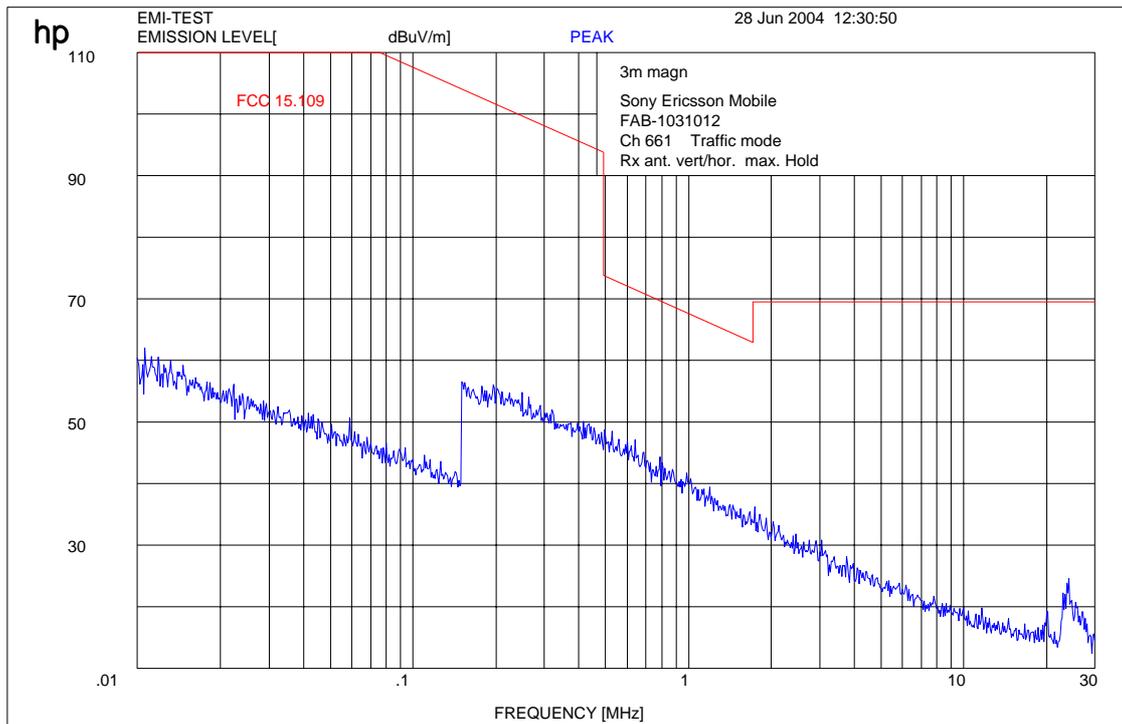

Channel 512 (up to 4 GHz)

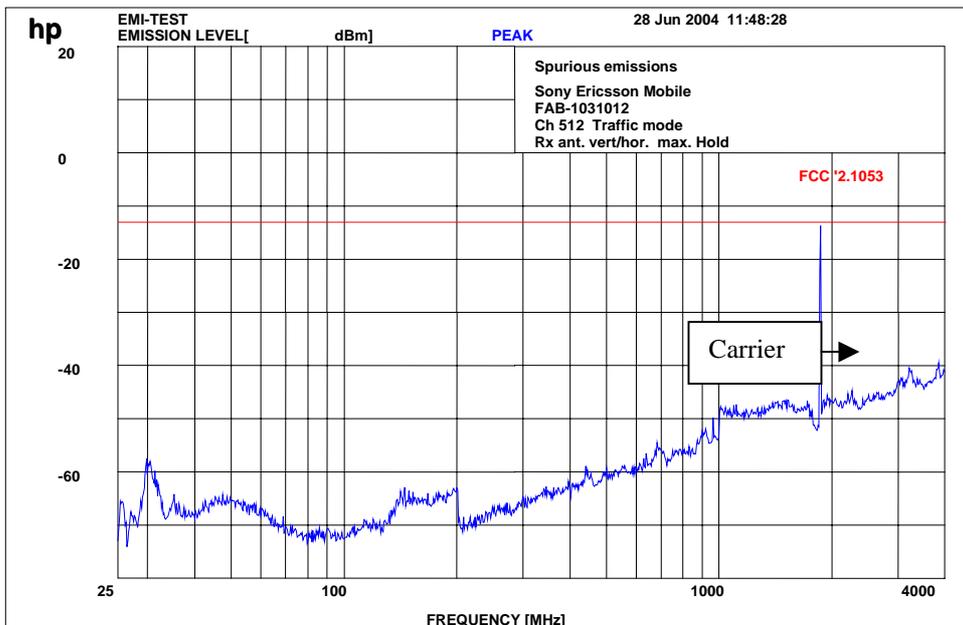


Channel 512 (up to 12 GHz Valid for all 3 channels)

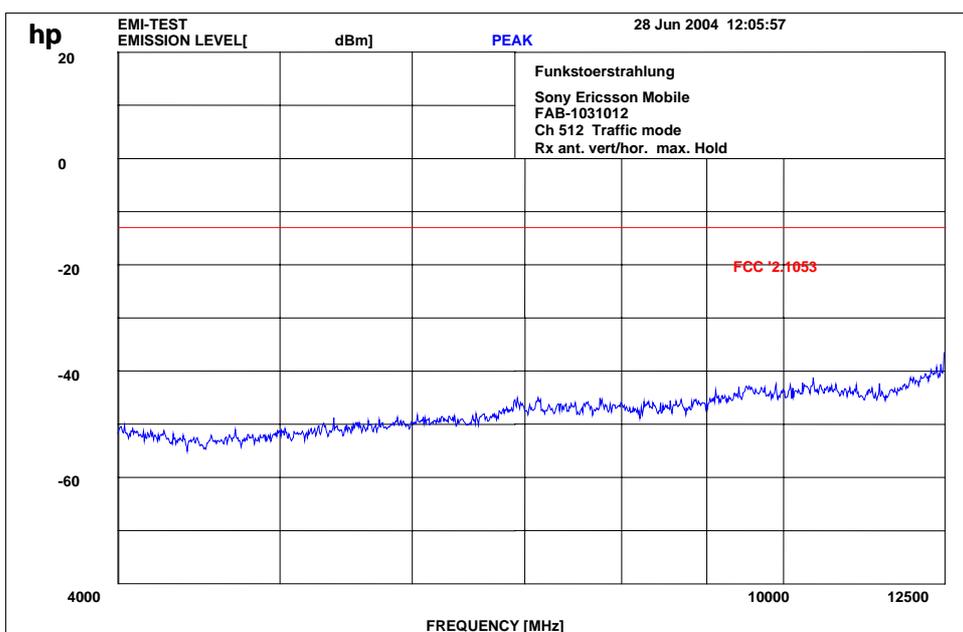


$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

Carrier suppressed with a rejection filter.

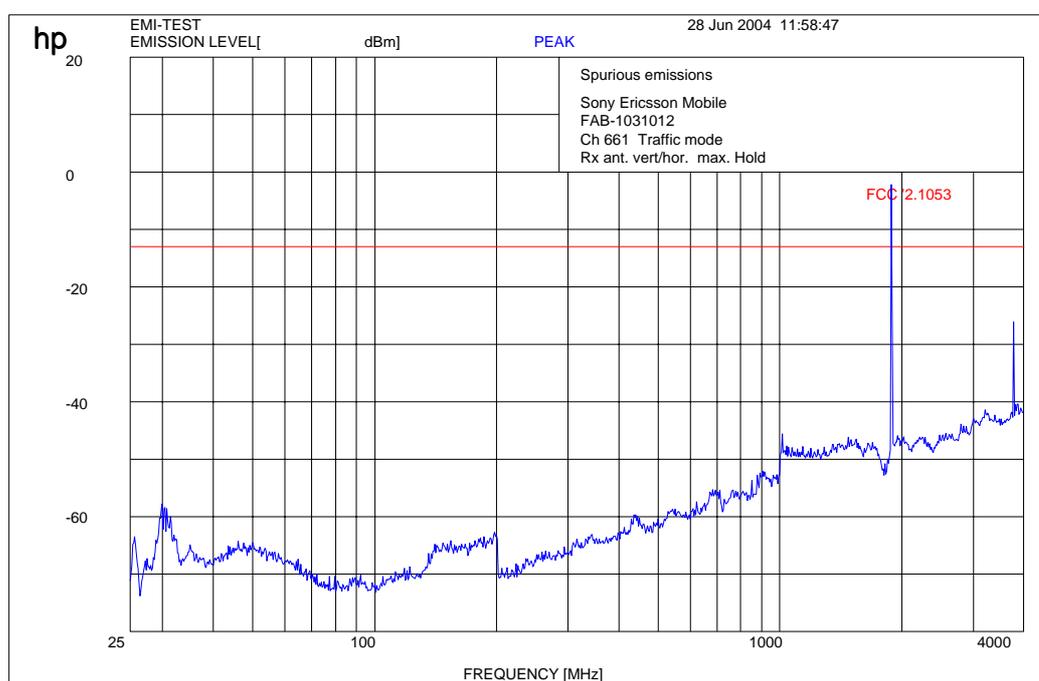Channel 661 (up to 4 GHz) $f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$ $f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter.

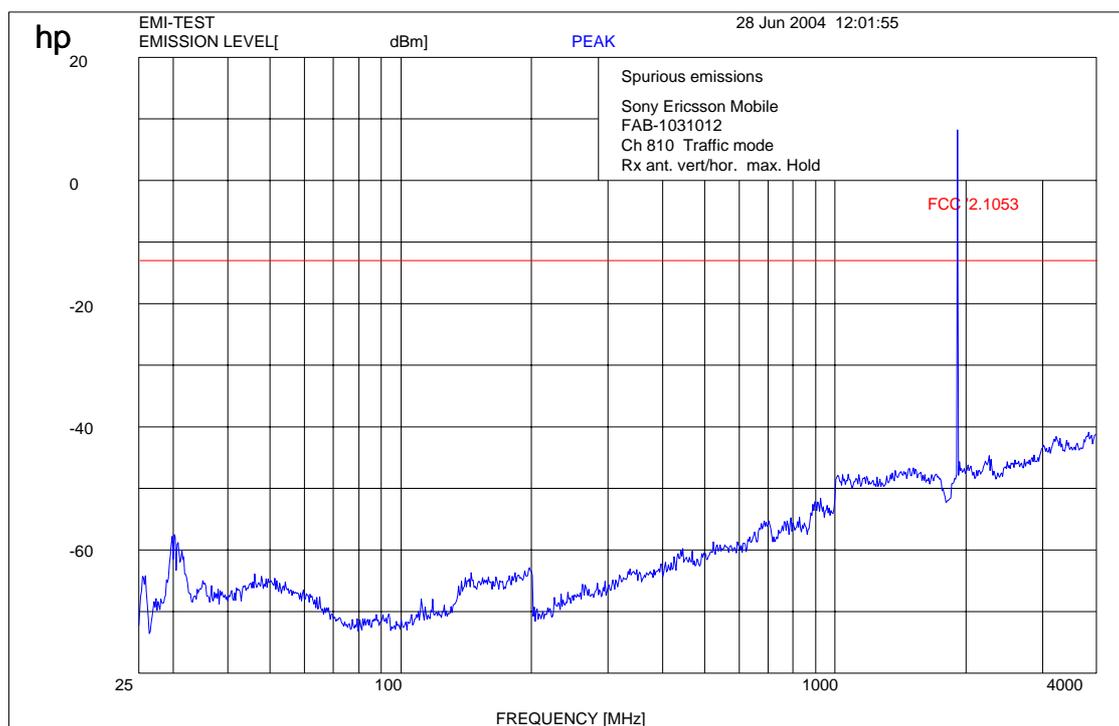Channel 810 (up to 4.0 GHz) $f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$ $f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 22 (97)

3.1.4 Receiver Radiated Emissions

Reference

FCC:	CFR Part 15.109, 2.1053
IC:	RSS 133, Issue 2, Rev. 1, Section 6.3

Measurement Results

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
CH 512			CH 661			CH 810		
f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)
Nothing found			Nothing found			Nothing found		
Measurement uncertainty			± 3 dB					

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz


$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

H = Horizontal ; V= Vertical

For measurement distance see table below

Limits: § 15.109 / 209

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

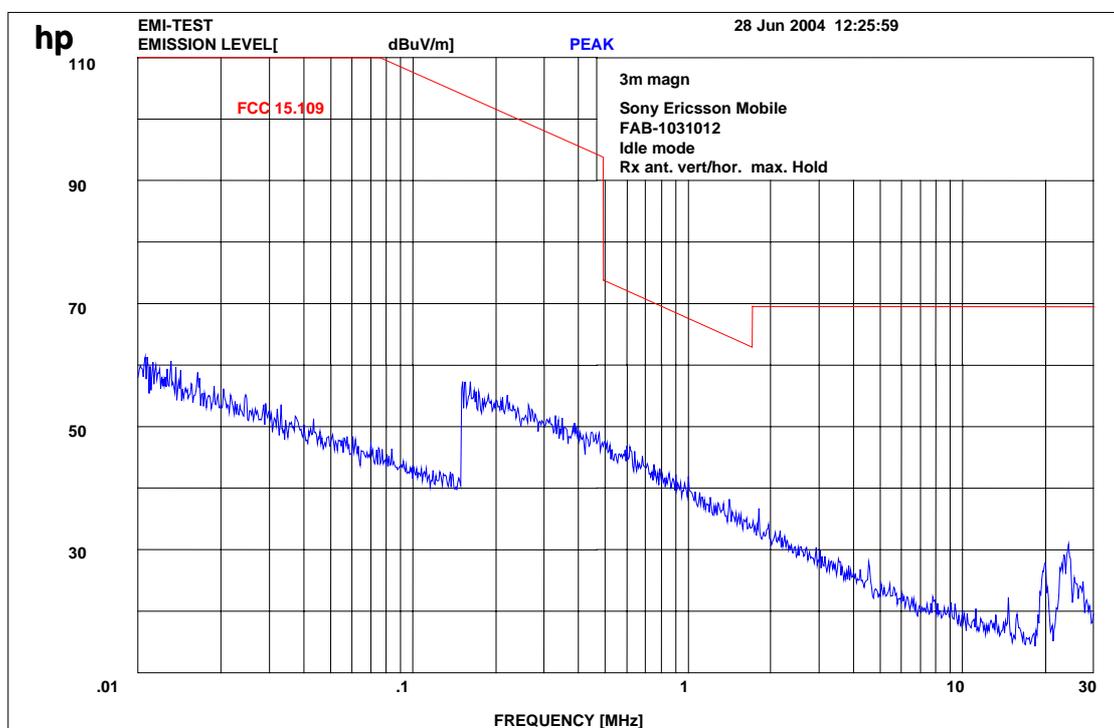Idle-Mode (up to 30 MHz)



CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 24 (97)

Idle-Mode (up to 12 GHz)

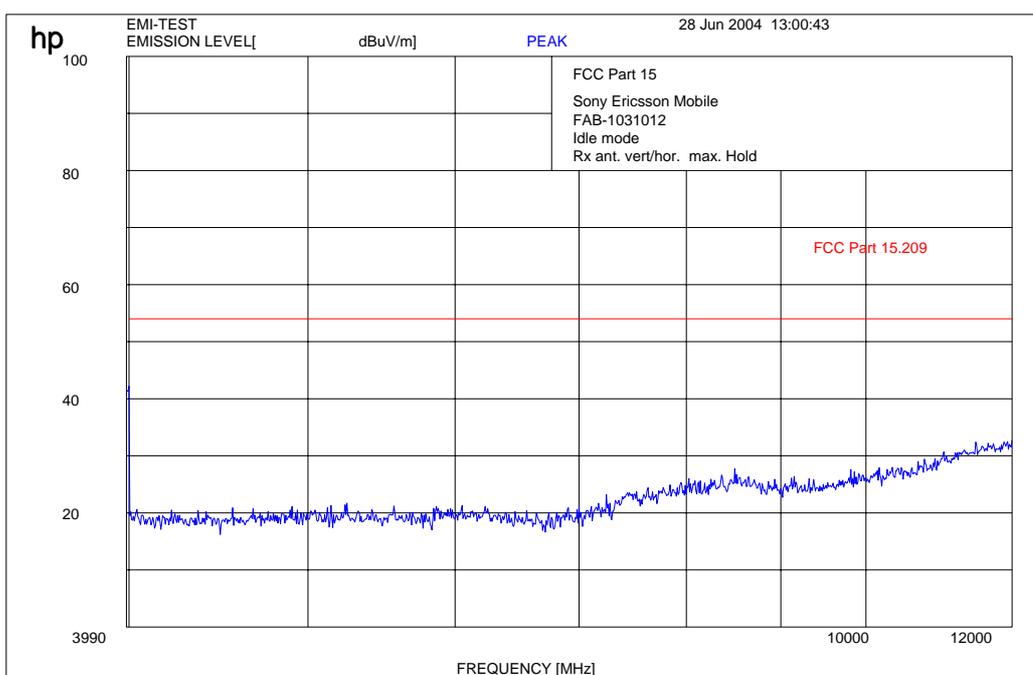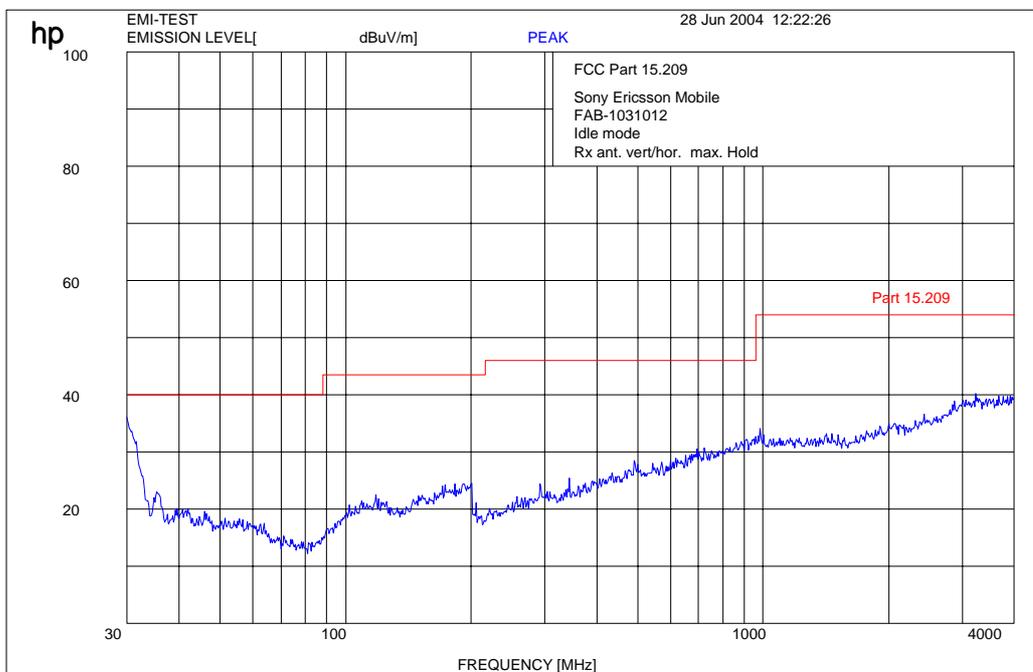

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz


CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 25 (97)

Idle-Mode (up to 20 GHz)

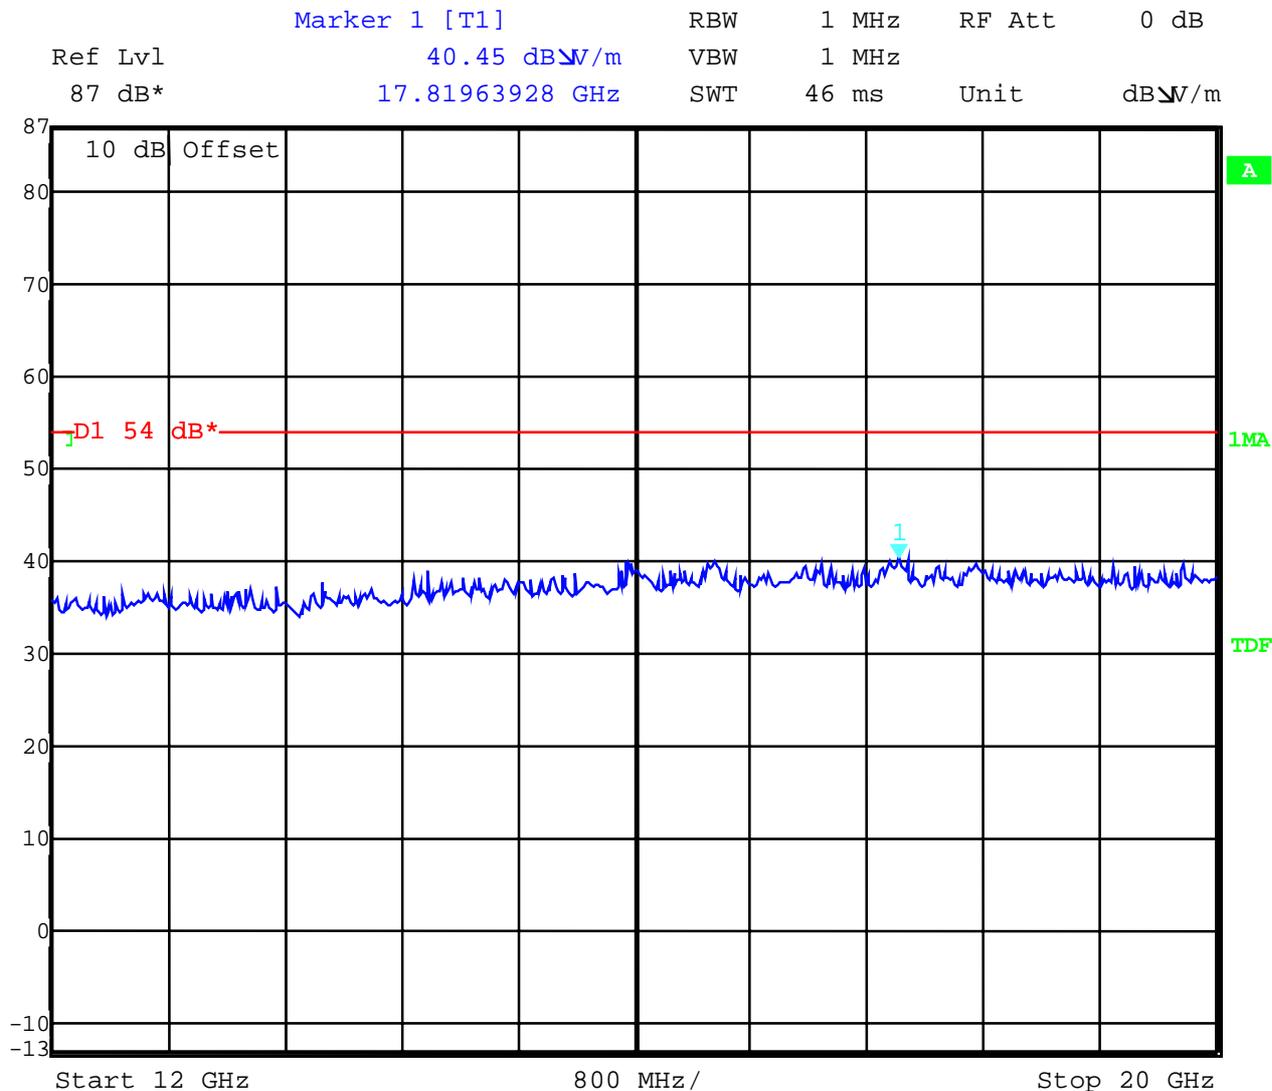

Date: 28.JUN.2004 13:09:41

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW 1 MHz

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 26 (97)

3.1.5 Conducted Spurious Emissions

Reference

FCC:	CFR Part 24.238, 2.10.51
IC:	RSS 133, Issue 2, Rev. 1, Section 6.3

Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter Channel Frequency:

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

Measurement Limit:

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Measurement Results:

Harmonic	Tx ch.-512 Freq. (MHz)	Level (dBm)	Tx ch.-661 Freq. (MHz)	Level (dBm)	Tx ch.-810 Freq. (MHz)	Level (dBm)
2	3700.4	-	3760	-	3819.6	-
3	5550.6	-	5640	-	5729.4	-
4	7400.8	-	7520	-	7639.2	-
5	9251.0	-	9400	-	9549.0	-
6	11101.2	-	11280	-	11458.8	-
7	12951.4	-	13160	-	13368.6	-
8	14801.6	-	15040	-	15278.4	-
9	16651.8	-	16920	-	17188.2	-
10	18502.0	-	18800	-	19098.0	-

CETECOM ICT Services GmbH


Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 27 (97)

Channel: 512

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	31.22 dBm	VBW	1 MHz	
	34.5 dBm	1.84369555 GHz	SWT	115 ms	Unit dBm

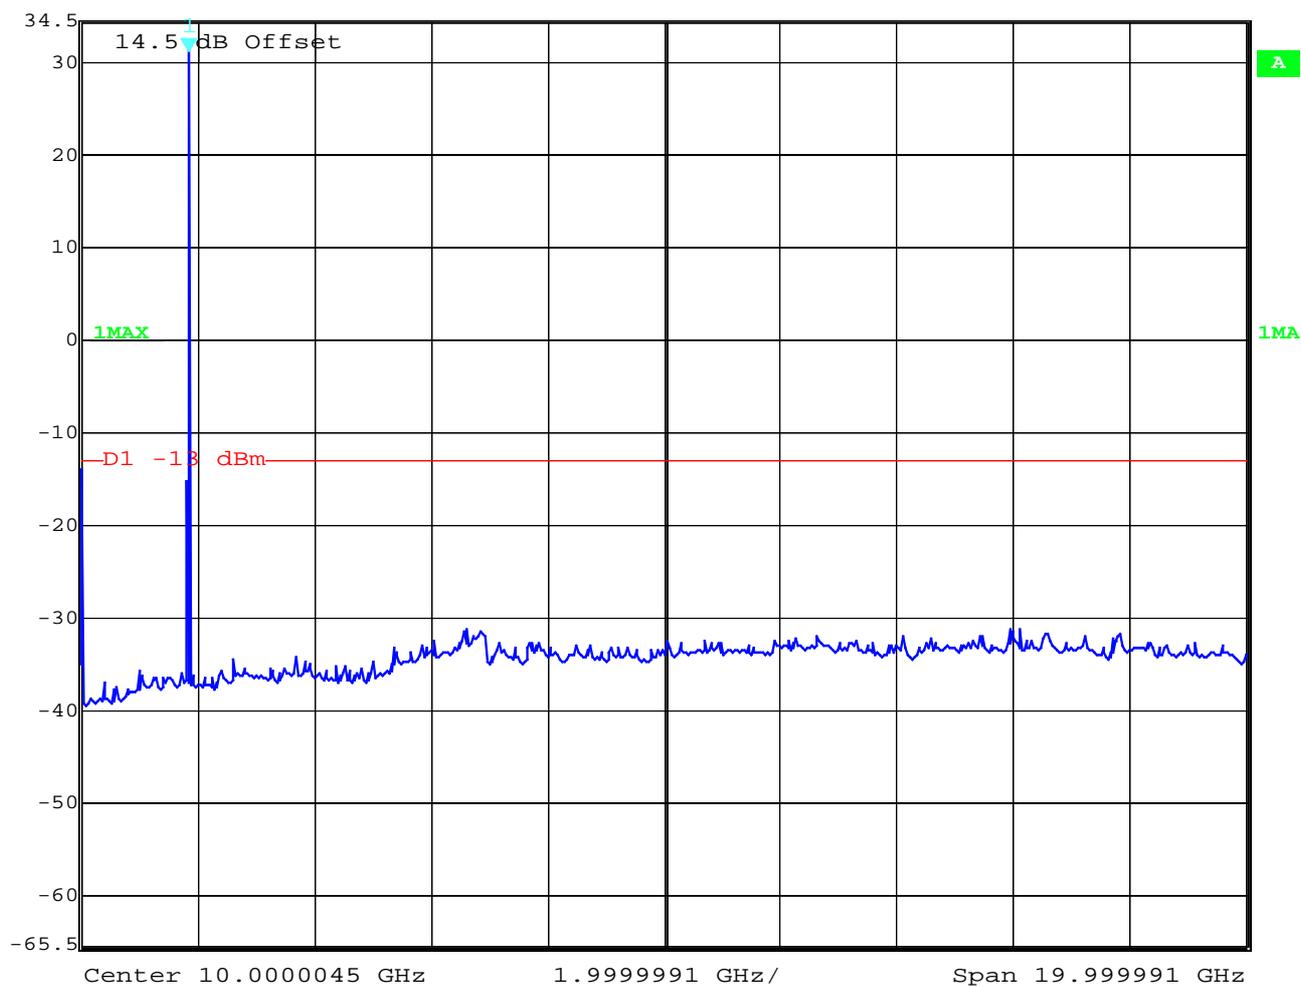

Date: 29.JUN.2004 14:24:05

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 28 (97)

Channel 661



	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
Ref Lvl	31.07 dBm	VBW	1 MHz		
34.5 dBm	1.84369555 GHz	SWT	115 ms	Unit	dBm

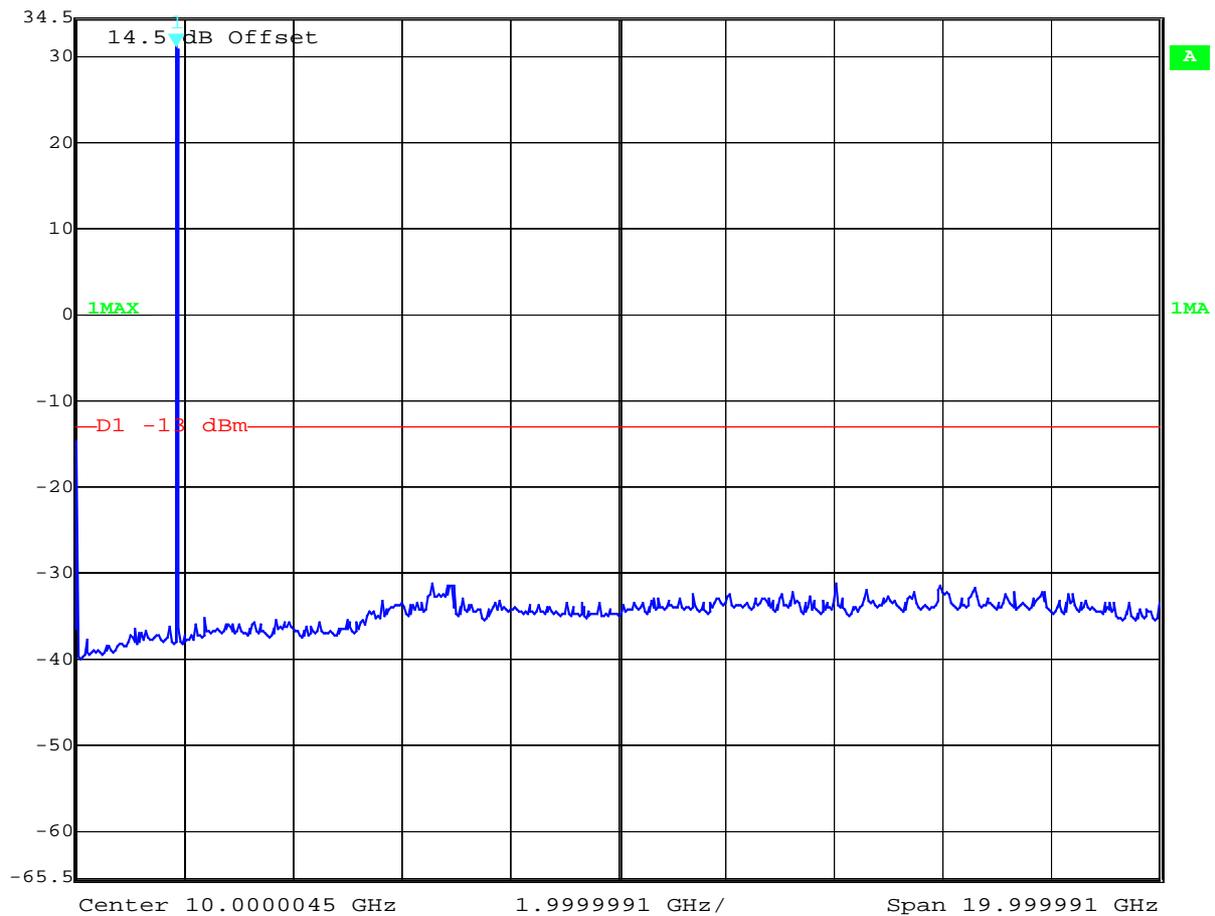

Date: 29.JUN.2004 14:25:20

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 29 (97)

Channel 810



	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
Ref Lvl	31.23 dBm	VBW	1 MHz		
34.5 dBm	1.92385583 GHz	SWT	115 ms	Unit	dBm

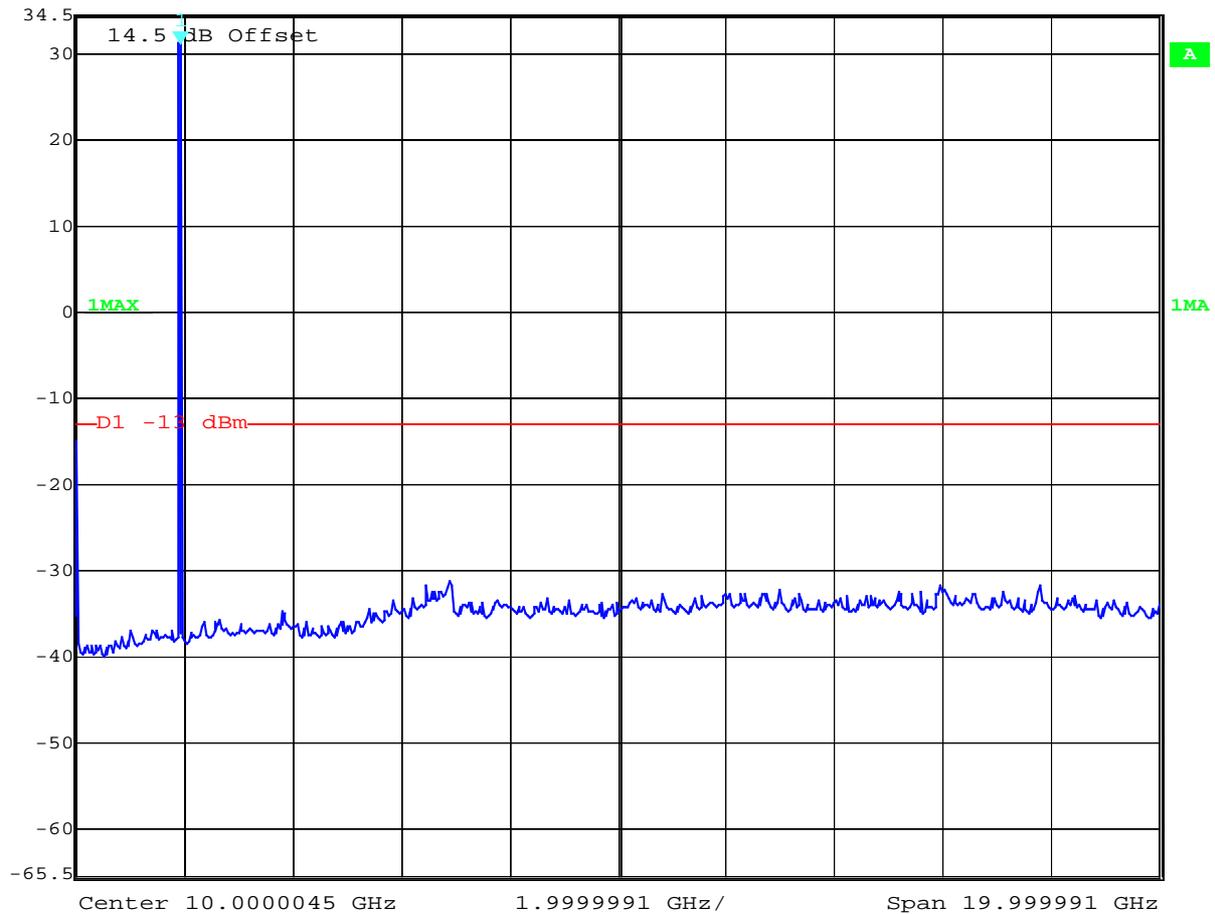

Date: 29.JUN.2004 14:25:59

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 30 (97)

3.1.6 Block Edge Compliance

Reference


FCC:	CFR Part 24.238
IC:	RSS 133, Issue 2, Rev. 1, Section 6.3

Measurement Limit:

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Block 1 Channel 512

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	30 dB
	34.5 dBm	-17.27 dBm	VBW	3 kHz	Unit	dBm
		1.84999399 GHz	SWT	280 ms		

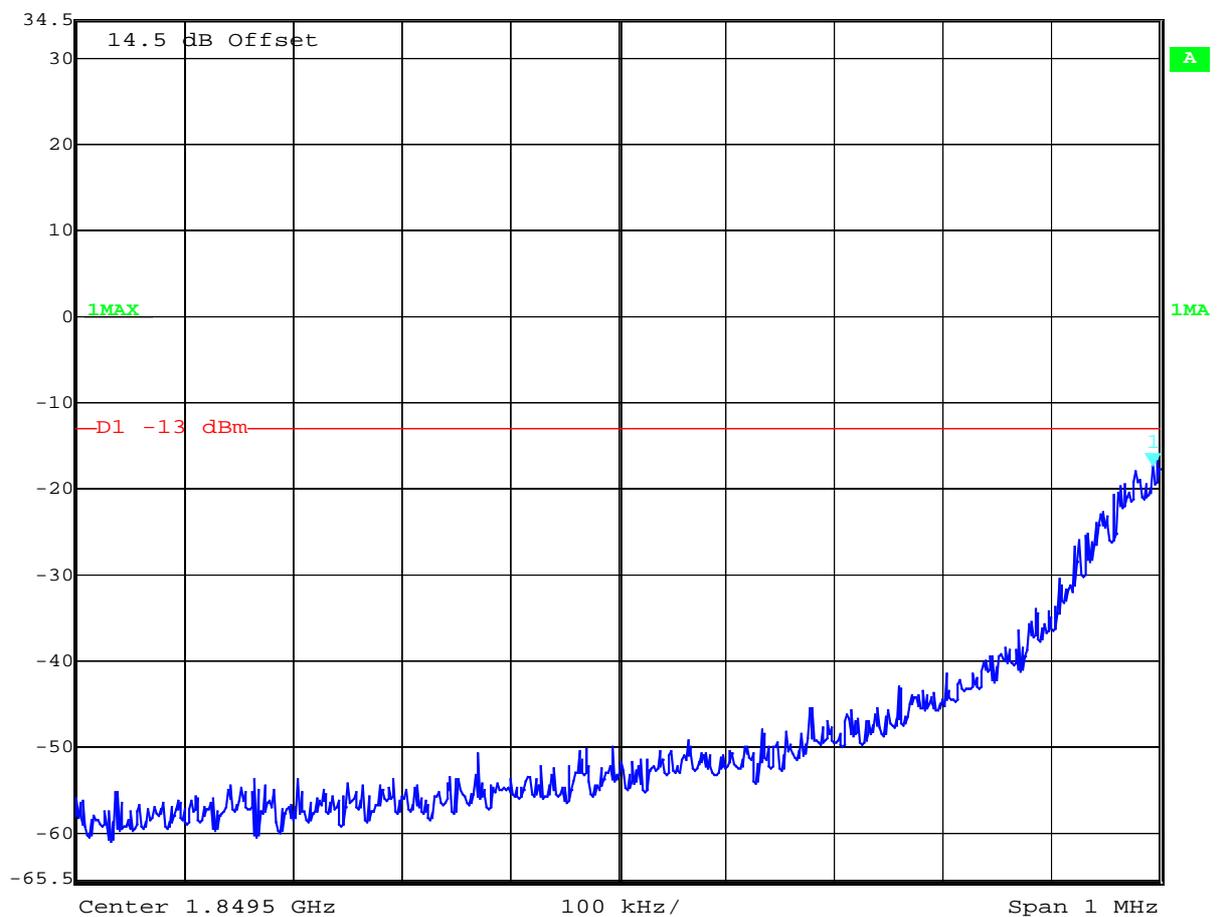

Date: 29.JUN.2004 14:28:50

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 31 (97)

Block 6 Channel 810



Marker 1 [T1]

RBW 3 kHz RF Att 30 dB

Ref Lvl -17.37 dBm

VBW 3 kHz


34.5 dBm

1.91002405 GHz

SWT 280 ms

Unit

dBm

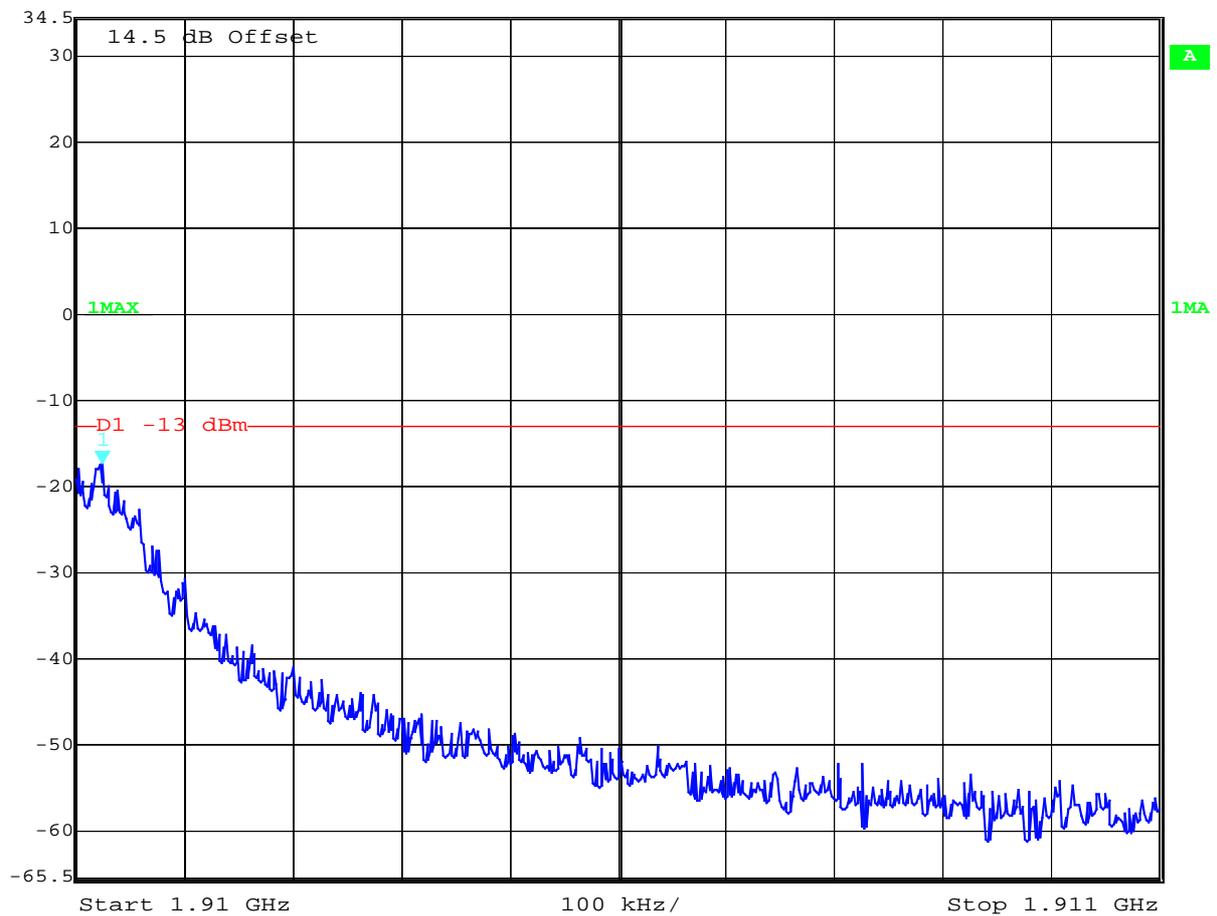

Date: 29.JUN.2004 14:30:01

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 32 (97)

3.1.7 Occupied Bandwidth

Reference

FCC:	CFR Part 24.238, 2.1049
IC:	RSS 133, Issue 2, Rev. 1, Section 5.6

Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth kHz	-26 dBc Bandwidth kHz
1850.2 MHz	280.561	318.637
1880.0 MHz	288.577	322.645
1909.8 MHz	280.561	320.641

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 300.0 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

CETECOM ICT Services GmbH


Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 33 (97)

Channel 512 99% (-20 dB) Occupied Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-0.90 dB	VBW	3 kHz	
	23.3 dBm	280.56112225 kHz	SWT	280 ms	Unit

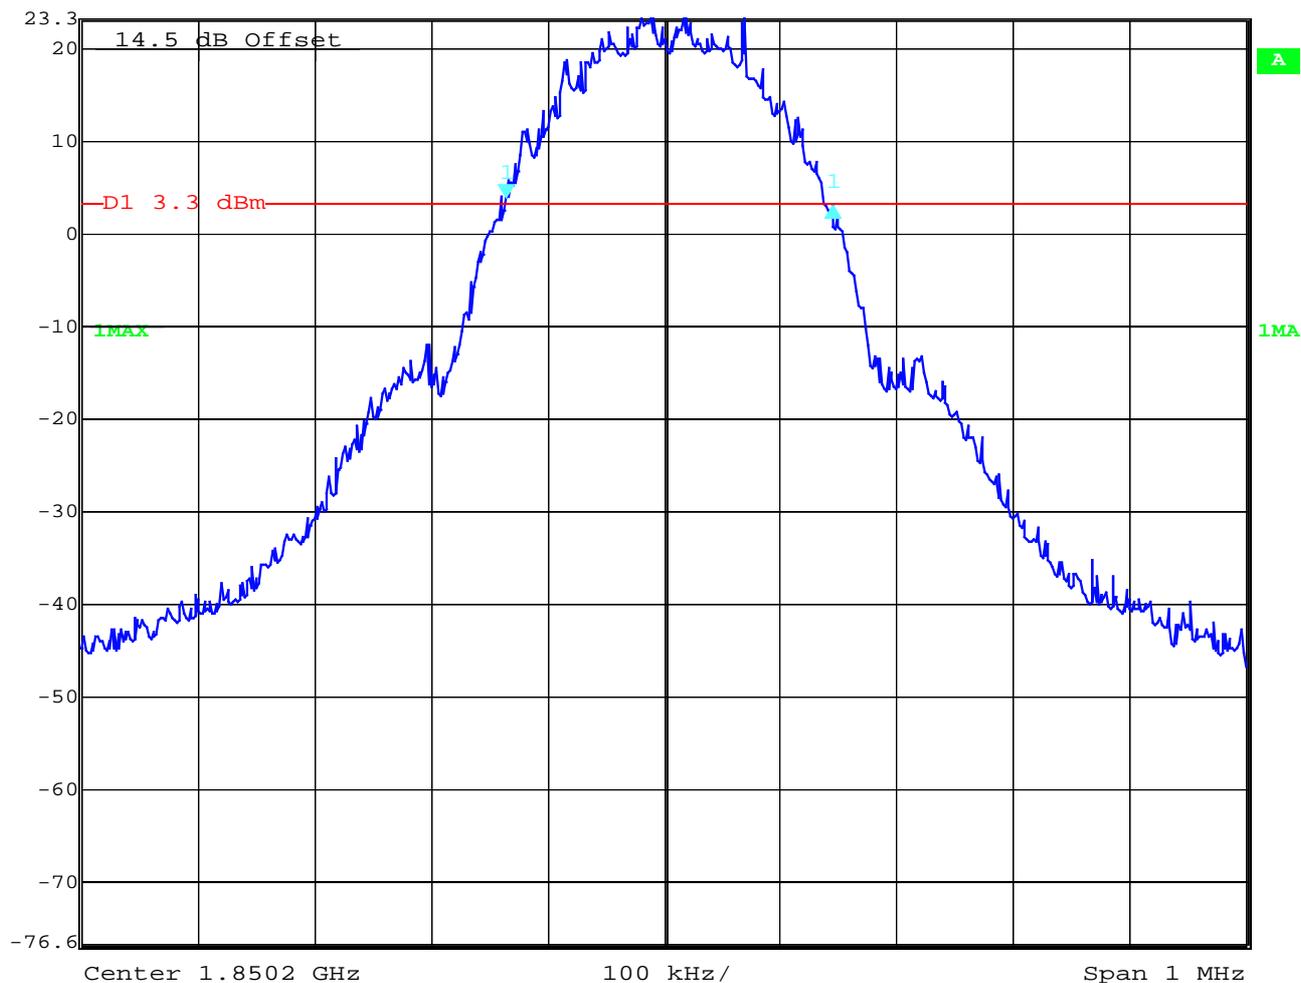

Date: 29.JUN.2004 14:33:11

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 34 (97)

Channel 512 -26 dBc Bandwidth



Delta 1 [T1]

RBW 3 kHz RF Att 30 dB

Ref Lvl

0.68 dB

VBW 3 kHz


23.3 dBm

318.63727455 kHz

SWT 280 ms

Unit

dBm

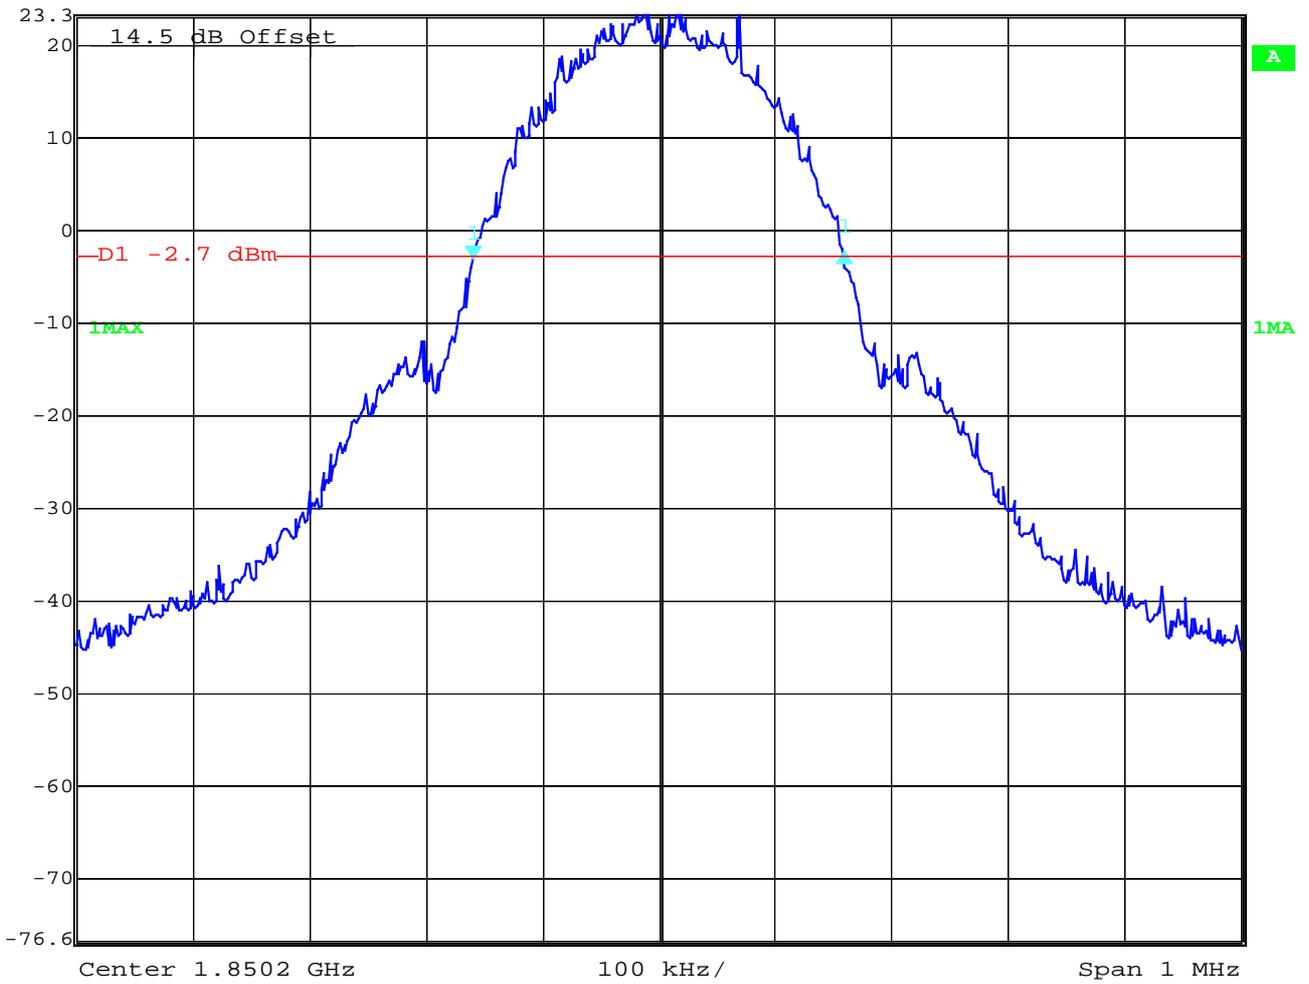

Date: 29.JUN.2004 14:34:16

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 35 (97)

Channel 661 99% (-20 dB) Occupied Bandwidth



Delta 1 [T1]

RBW 3 kHz RF Att 30 dB

Ref Lvl 1.54 dB

VBW 3 kHz


22.3 dBm

288.57715431 kHz

SWT 280 ms

Unit

dBm

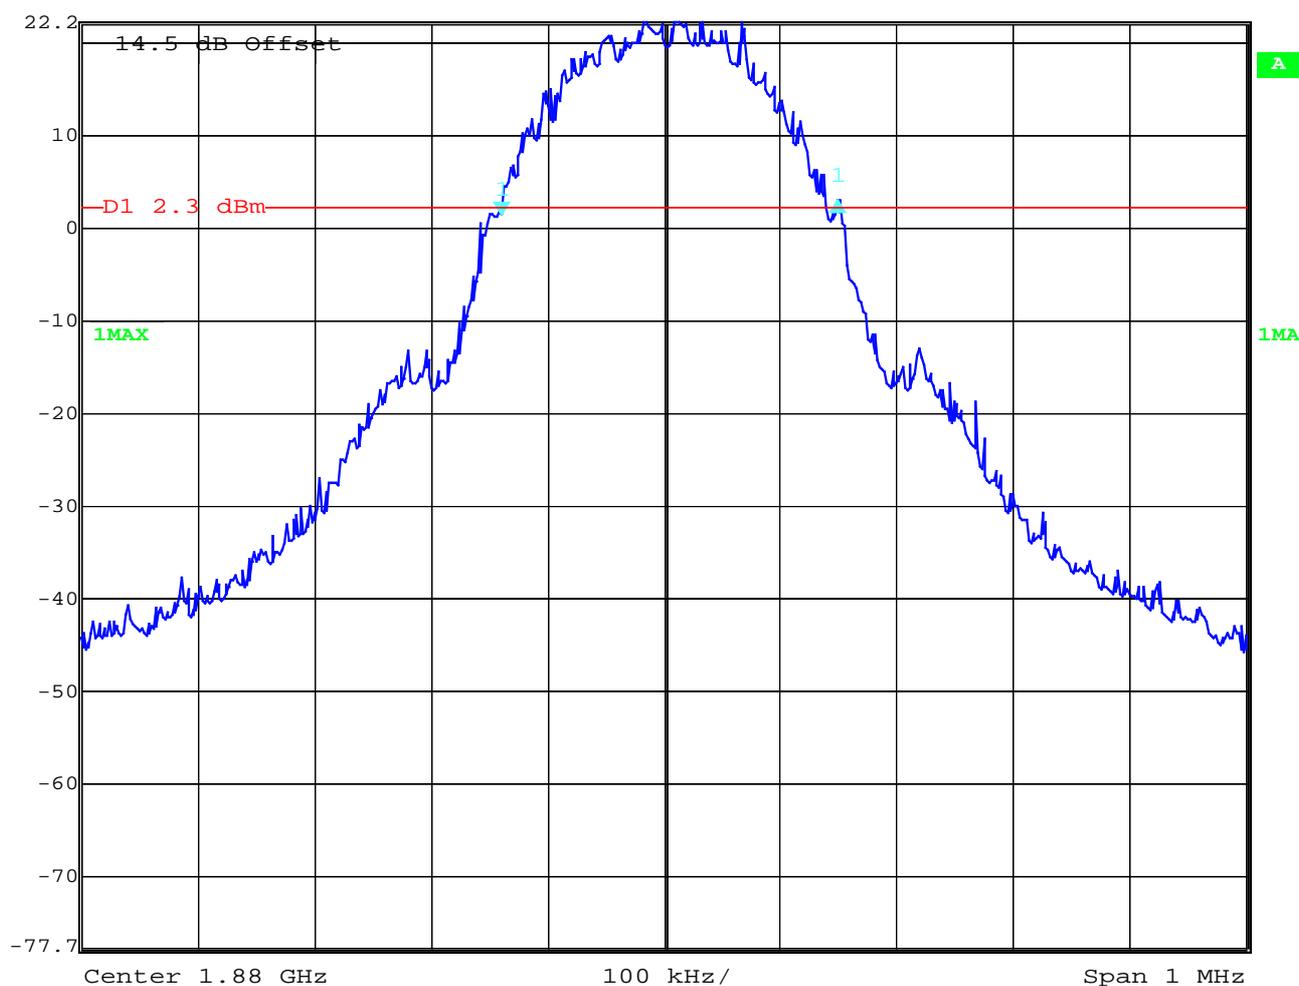

Date: 29.JUN.2004 14:36:24

CETECOM ICT Services GmbH


Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 36 (97)

Channel 661 -26 dBc Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-1.84 dB	VBW	3 kHz	
	22.3 dBm	322.64529058 kHz	SWT	280 ms	Unit

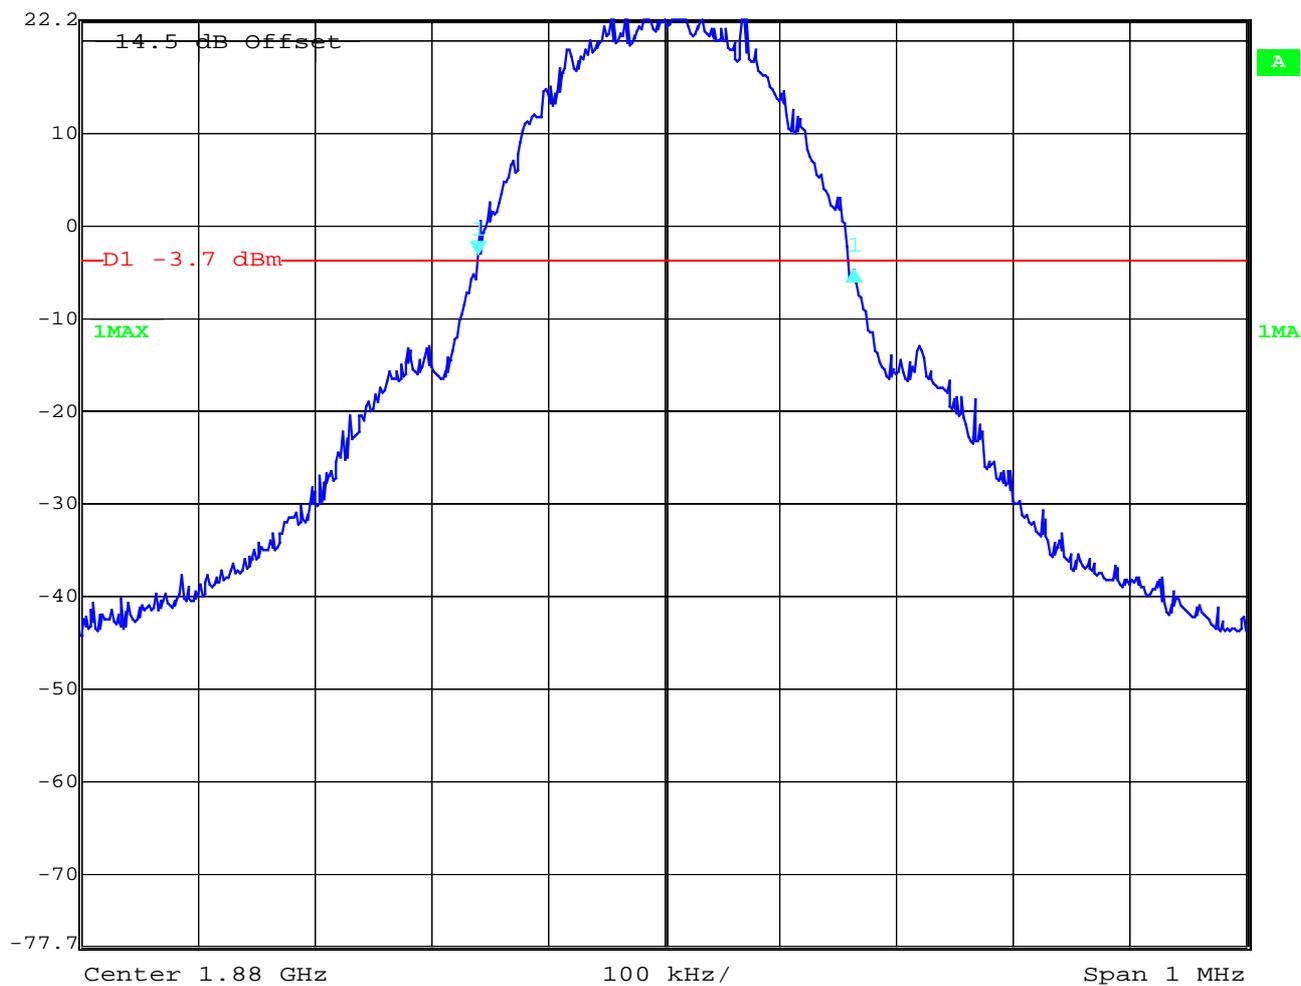

Date: 29.JUN.2004 14:38:58

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 37 (97)

Channel 810 99% (-20 dB) Occupied Bandwidth



Delta 1 [T1]


RBW 3 kHz RF Att 30 dB

Ref Lvl 0.31 dB

VBW 3 kHz

22.3 dBm 280.56112224 kHz

SWT 280 ms Unit dBm

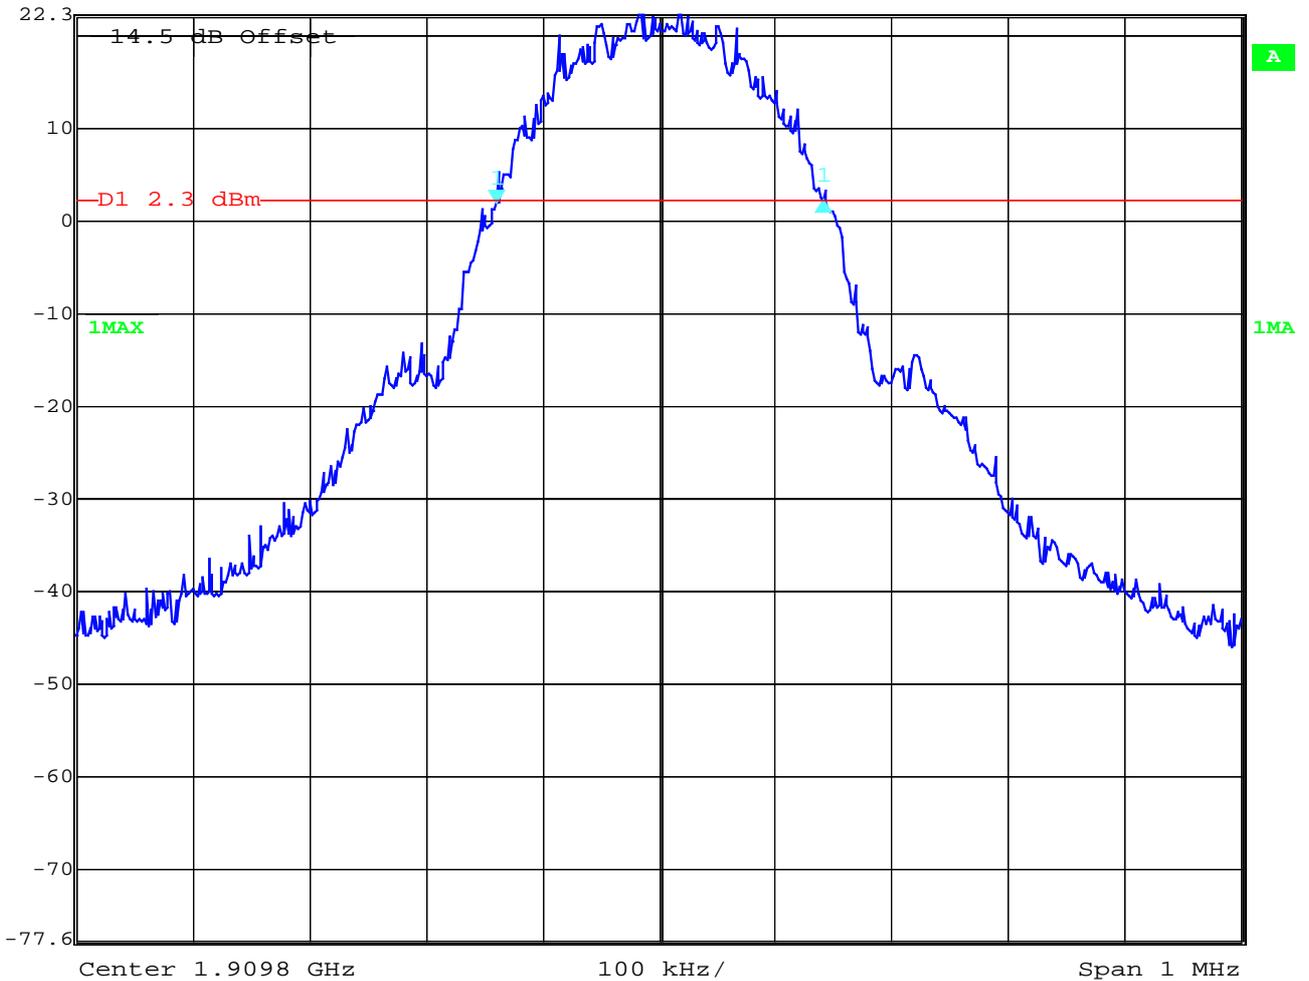

Date: 29.JUN.2004 14:41:57

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 38 (97)

Channel 810 -26 dBc Bandwidth



	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
Ref Lvl	2.47 dB	VBW	3 kHz		
22.3 dBm	320.64128256 kHz	SWT	280 ms	Unit	dBm

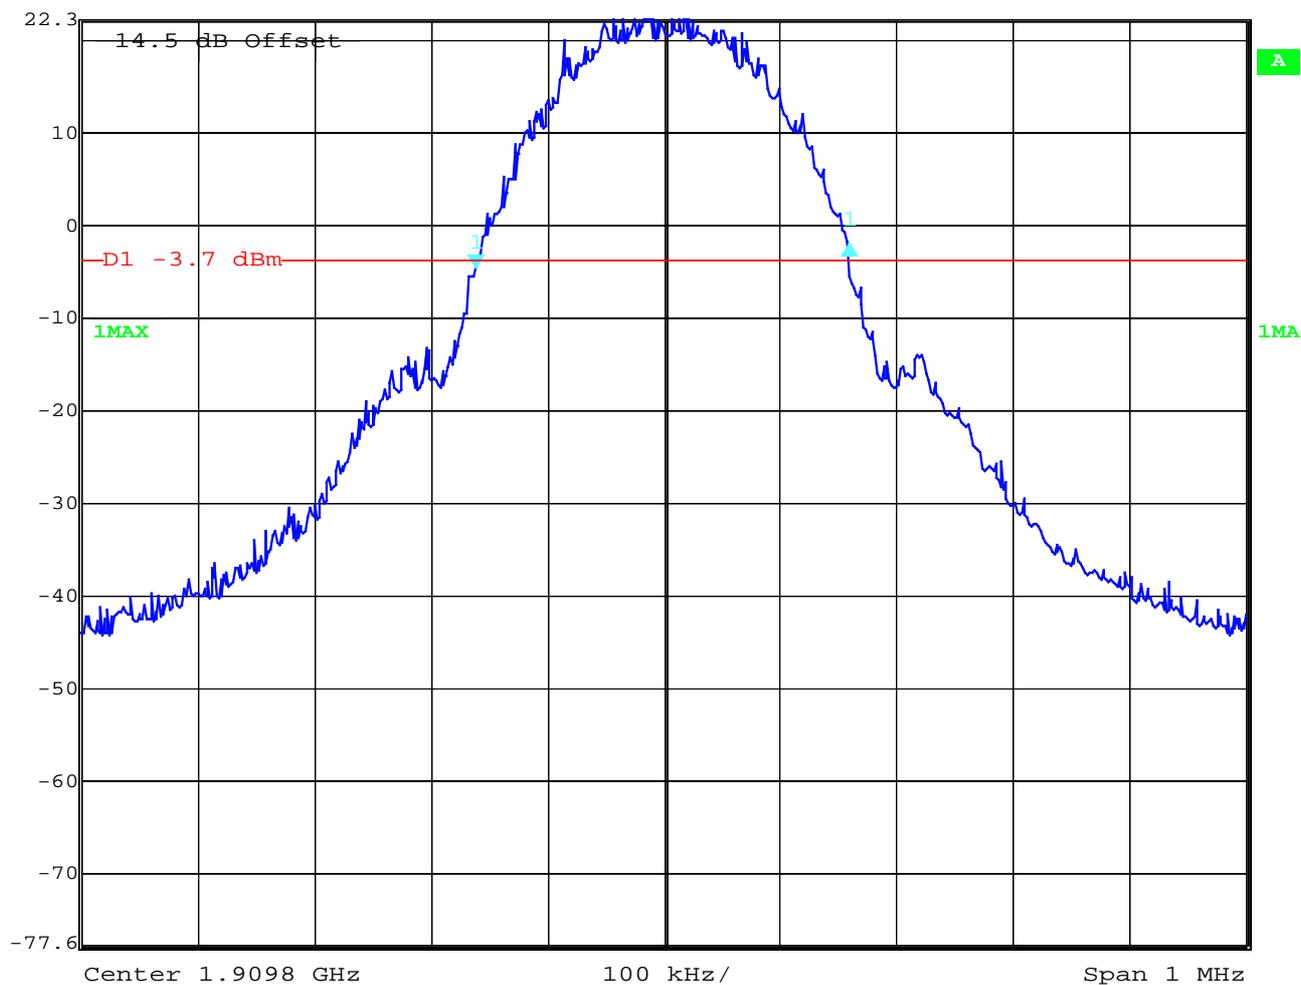

Date: 29.JUN.2004 14:43:05

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 39 (97)

3.2 PART GSM 850

3.2.1 RF Power Output

Reference

FCC:	CFR Part 22.9.1.3, 2.1046
IC:	RSS 132, Issue 1, Section 4.4 and 6.4

Summary:

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation. The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average) This measurements were done at 3 frequencies, 824.2 MHz, 836.2 MHz and 848.8 MHz (bottom, middle and top of operational frequency range)

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
5	+33	± 2

Measurements Results Output Power (conducted)

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
824.2	5	32.5	32.4
836.4	5	32.7	32.6
848.8	5	32.6	32.5
Measurement uncertainty		±0.5 dB	

ERP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 22.913 specifies that "Mobile/portable stations are limited to 7 watts ERP.

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) The measurements was performed with full rf output power and modulation.

(b) Test was performed at listed 3m test site (listed with FCC, IC).

(c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)

(d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.

(e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency

Resolution BW: 100 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

(g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.

(h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.

(j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.

(k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.

(l) Repeat for all different test signal frequencies

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency : equal to the signal source

Resolution BW : 10 kHz

Video BW : same

Detector Mode : positive

Average : off

Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna): .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 41 (97)

(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 \text{ dB}$$

Total Correction factor in EMI Receiver # 2 = $L2 - L1 + G1$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Limits:

Power Step	Burst Peak (dBm)
0	<33

Measurement Results Output Power (Radiated)

Frequency (MHz)	Power Step	BURST Peak (dBm)	MODULATION AVERAGE (dBm)
		ERP	ERP
824.2	5	28.5	28.4
836.4	5	28.1	28.0
848.8	5	28.4	28.3
Measurement uncertainty		±3 dB	

Sample calculation:

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result	ERP	Substitution Antenna
MHz	dBμV	dBm	dBi	dBd	dB	dBm	dBm	
824.2	86.8	33.5		-10.50	1.67		28.4	UHAP Schwarzbeck S/N 460

$$ERP = SG \text{ (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dB)}$$

*ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1 \text{ dB}$

3.2.2 Frequency Stability

Reference

FCC:	CFR Part 22.355, 2.1055
IC:	RSS 132, Issue 1, Section 4.3 and 6.3

Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with nominal voltage, connected to the CMU 200 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal Voltage. Vary supply voltage from minimum Voltage to maximum Voltage, in steps re-measuring carrier frequency at each voltage. Pause at nominal Voltage . Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with nominal Voltage, connected to the CMU 200 and in a simulated call on channel 189(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 22.355, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.4 V dc and 4.4 V dc, with a nominal voltage of 3.8 V dc.

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01



Page 43 (97)

Measurement Results: AFC FREQ ERROR vs. VOLTAGE

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.3	38	0,00000202	0,0202
3.4	33	0,00000176	0,0176
3.5	36	0,00000191	0,0191
3.6	31	0,00000165	0,0165
3.7	36	0,00000191	0,0191
3.8	33	0,00000176	0,0176
3.9	29	0,00000154	0,0154
4.0	27	0,00000144	0,0144
4.1	32	0,00000170	0,0170
4.2	28	0,00000149	0,0149
4.3	25	0,00000133	0,0133
4.4	22	0,00000117	0,0117

Measurement Results: AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	48	0,00000255	0,0255
-20	45	0,00000239	0,0239
-10	43	0,00000229	0,0229
±0.0	39	0,00000207	0,0207
+10	40	0,00000213	0,0213
+20	36	0,00000191	0,0191
+30	38	0,00000202	0,0202
+40	32	0,00000170	0,0170
+50	29	0,00000154	0,0154
+60	32	0,00000170	0,0170

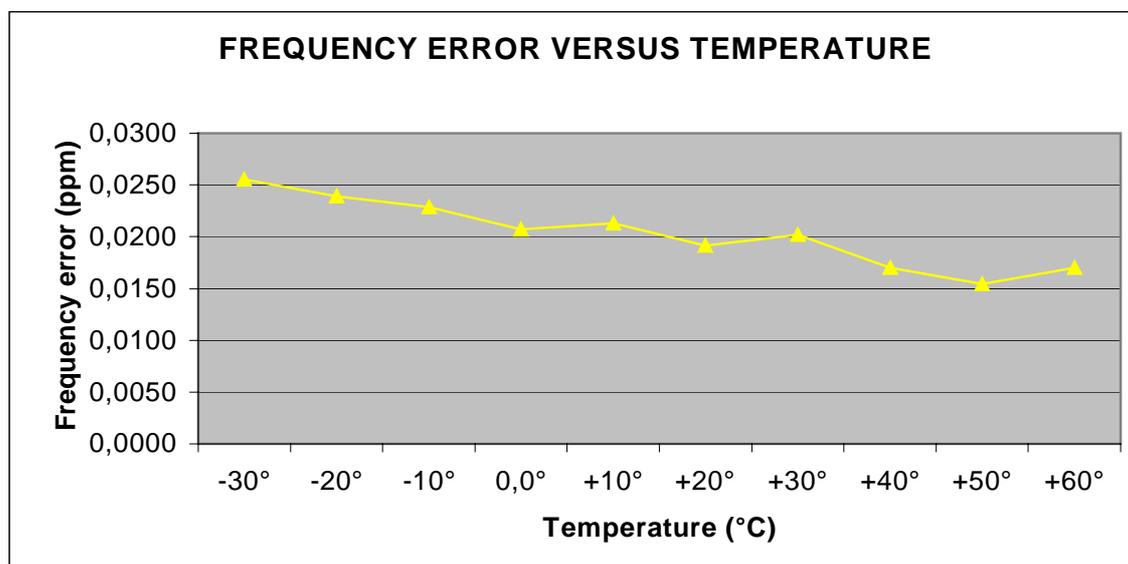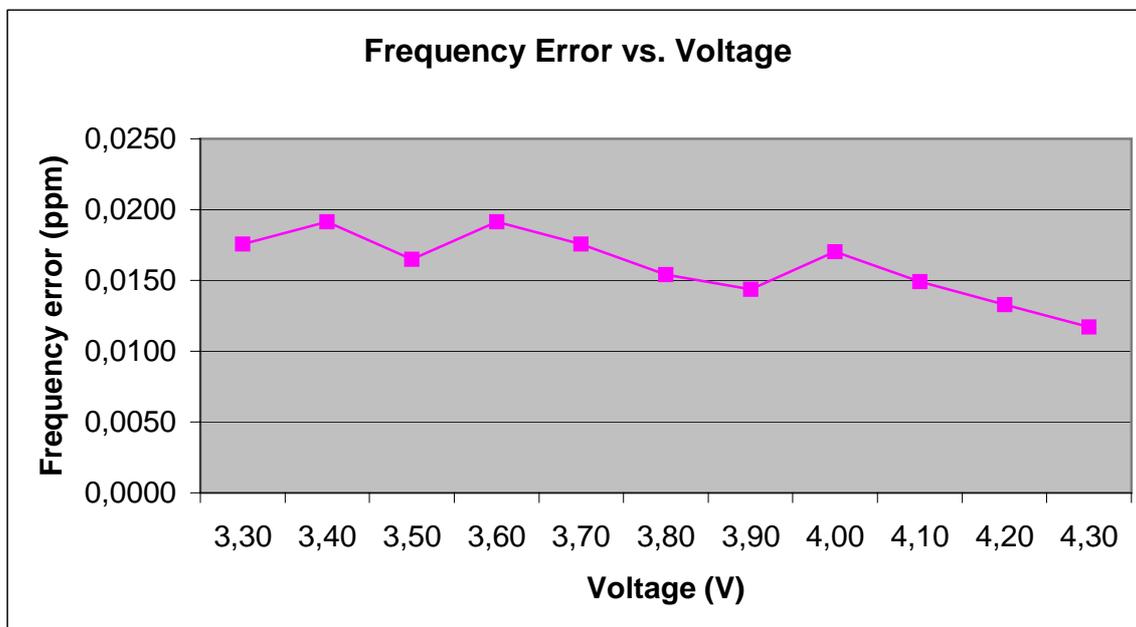

3.2.3 Radiated Emissions

Reference

FCC:	CFR Part 22.917, 2.1053
IC:	RSS 132, Issue 1, Section 4.5 and 6.5

Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603 .

Measurement Limit:

Sec. 22.917 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 46 (97)

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.2 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.
All measurements were done in horizontal and vertical polarization, the plots shows the worst case.
As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch.-128 Freq. (MHz)	Level (dBm)	Tx ch.-189 Freq. (MHz)	Level (dBm)	Tx ch.-251 Freq. (MHz)	Level (dBm)
2	1648.4	-	1673.2	-	1697.6	-
3	2472.6	-	2509.8	-	2546.4	-
4	3296.8	-	3346.4	-	3395.2	-
5	4121.0	-	4183.0	-	4244.0	-
6	4945.2	-	5019.6	-	5092.8	-
7	5769.4	-	5856.2	-	5941.6	-
8	6593.6	-	6692.8	-	6790.4	-
9	7417.8	-	7529.4	-	7639.2	-
10	8242.0	-	8366.0	-	8488.0	-

Sample calculation:

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result	ERP	Substitution Antenna
MHz	dB μ V	dBm	dBi	dBd	dB	dBm	dBm	
		33.5		-10.50	1.67			UHAP Schwarzbeck S/N 460

$$\text{ERP} = \text{SG (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dB)}$$

*ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.1\text{dBi}$

CETECOM ICT Services GmbH


Test report No.: 2-3623-01-02/04

Date: 2004-07-01


Page 47 (97)

Magn. Field strength up to 30 MHz


Traffic mode (valid for all 3 channels)

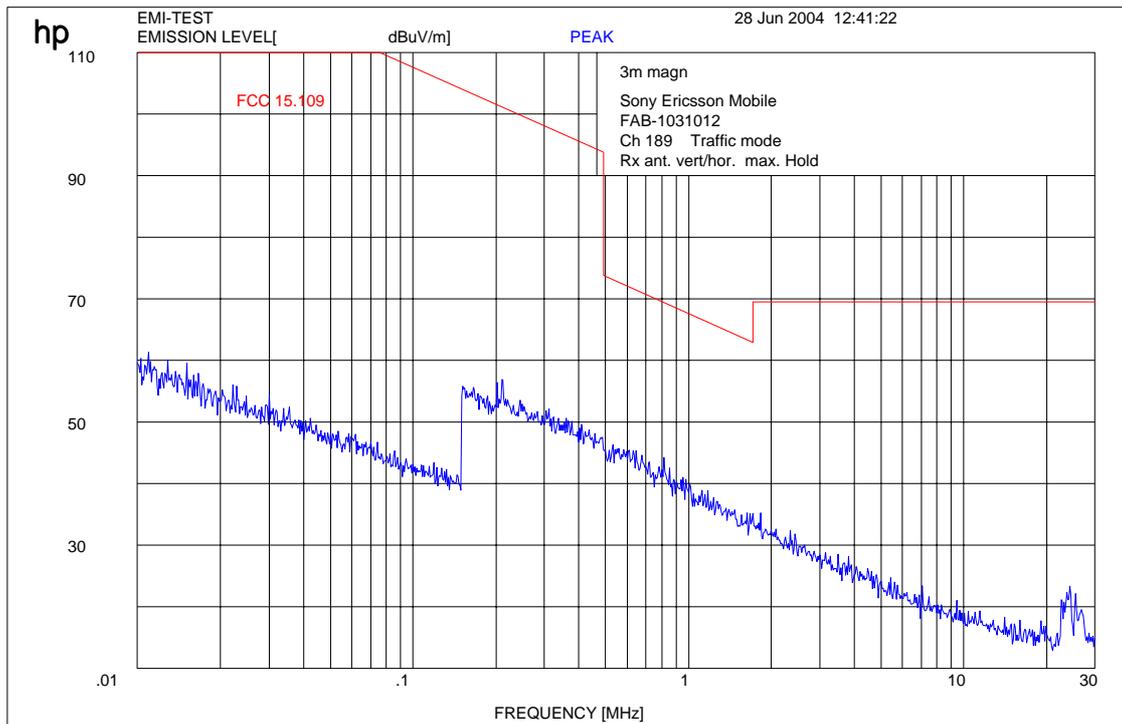

Channel 128 (up to 4 GHz)

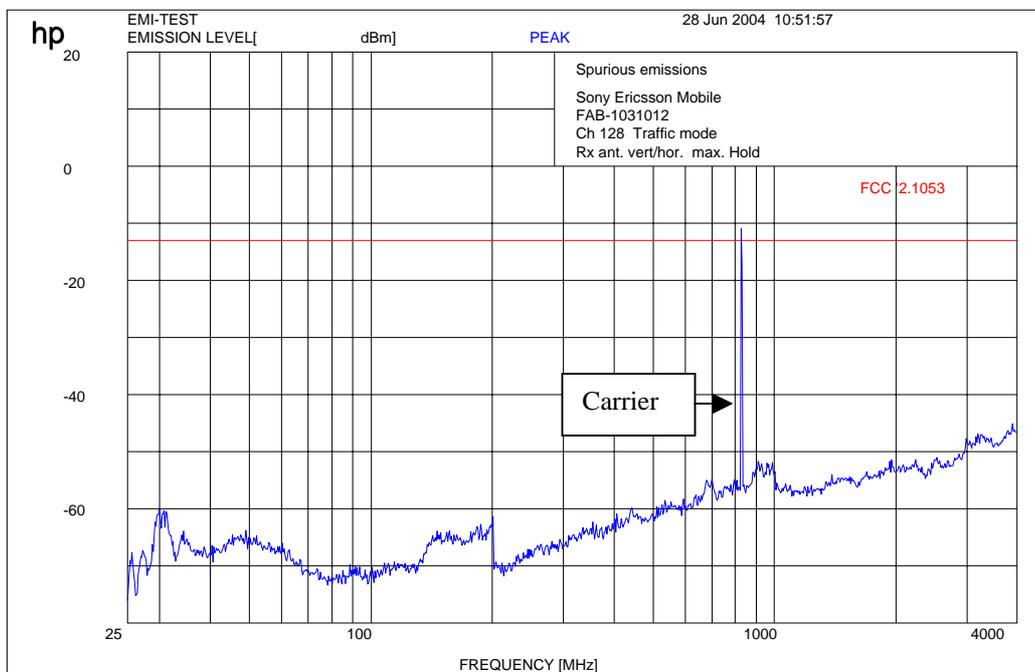

Channel 128 (up to 12 GHz valid for all 3 channels)

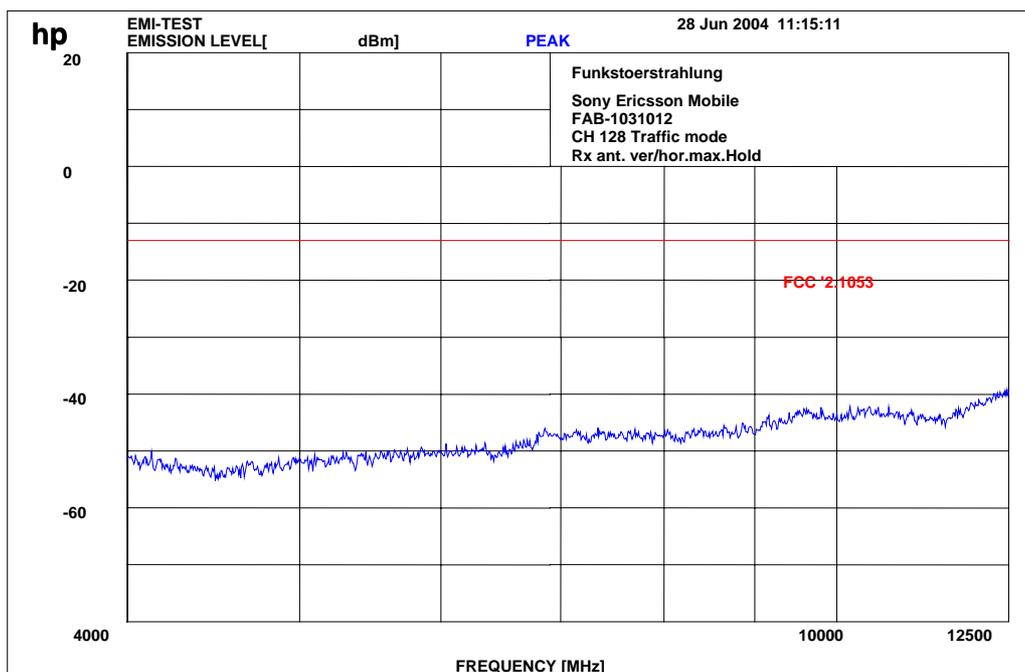

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz
Carrier suppressed with a rejection filter

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz


CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 49 (97)

Channel 189 (up to 4 GHz)

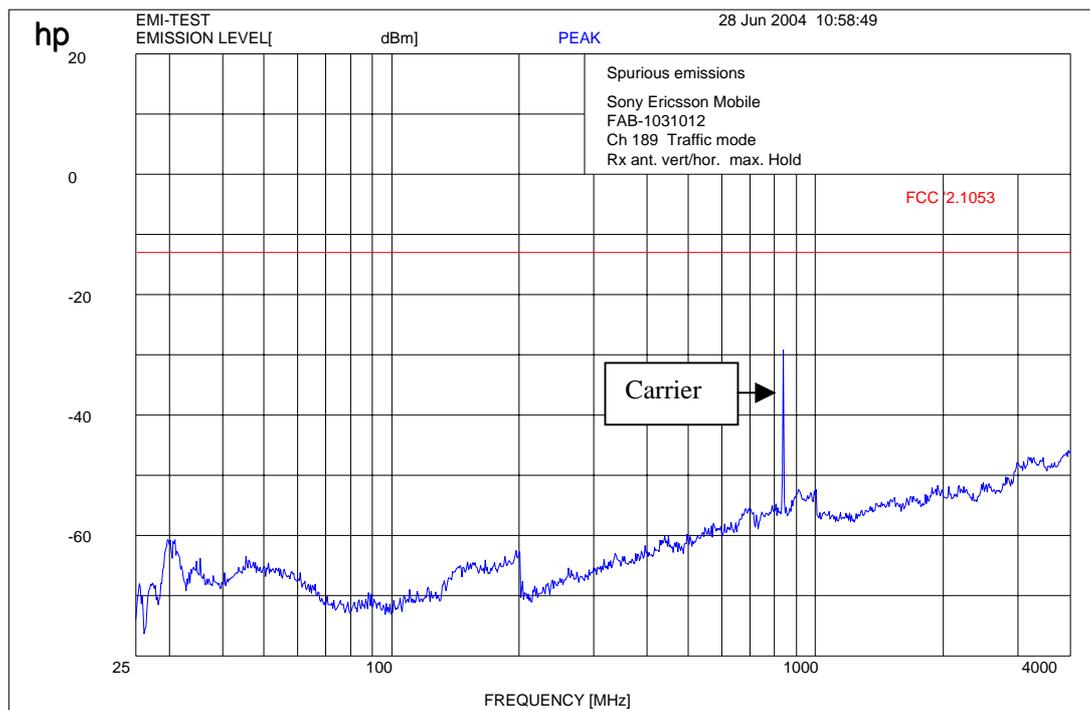 $f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$ $f \geq 1 \text{ GHz} : \text{RBW/VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter

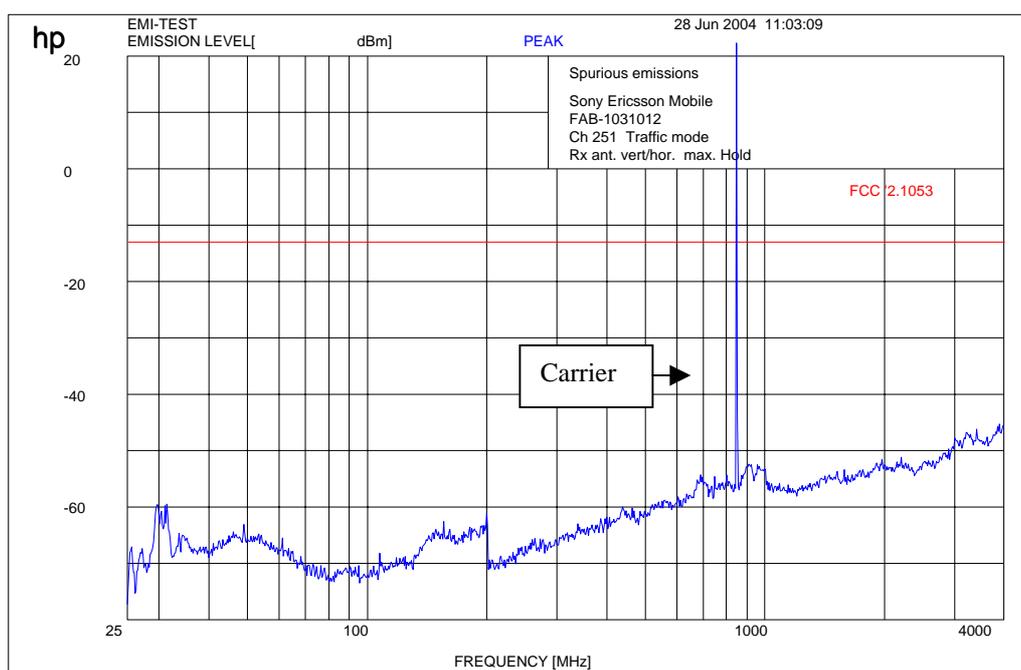Channel 251 (up to 4 GHz)

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz
Carrier suppressed with a rejection filter

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 52 (97)

3.2.4 Receiver Radiated Emissions

Reference

FCC:	CFR Part 15.109, 2.1053
IC:	RSS 132, Issue 1, Section 4.6 and 6.6

Measurement Results

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
CH 128			CH 189			CH 251		
f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)
Nothing found			Nothing found			Nothing found		
Measurement uncertainty			± 3 dB					

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

H = Horizontal ; V= Vertical

Measurement distance see table

Limits: § 15.109 / 209

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3


CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 53 (97)

Idle-Mode up to 30 MHz)

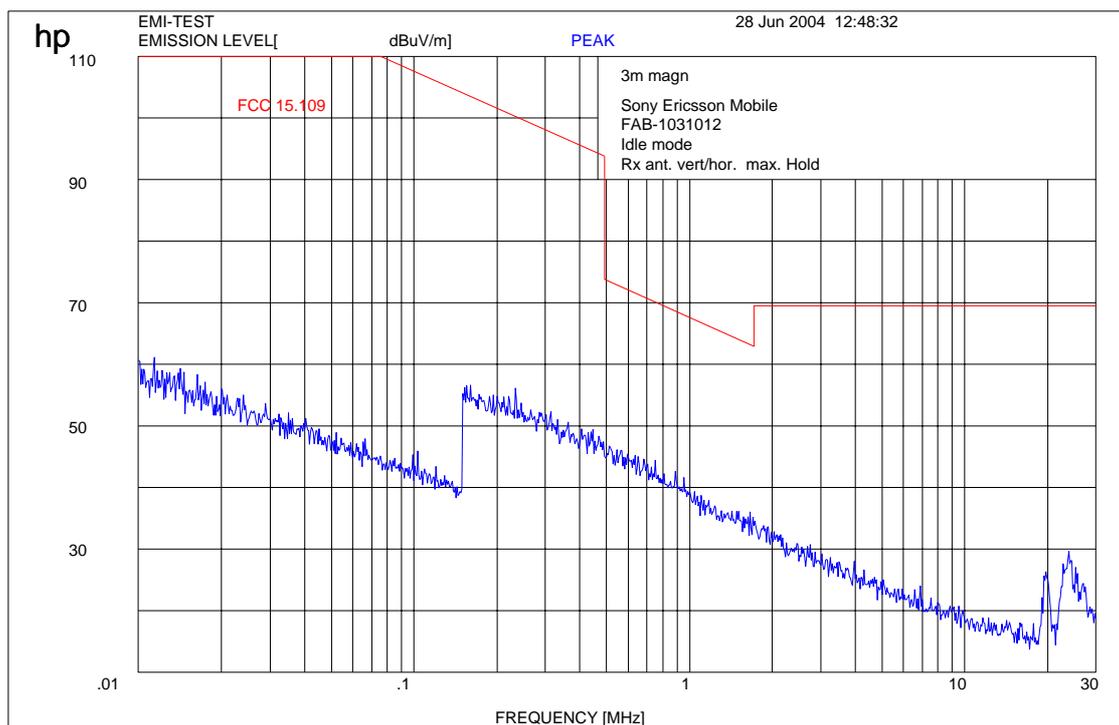



CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 54 (97)

Idle-Mode (this is valid for all channels and up to 12 GHz)

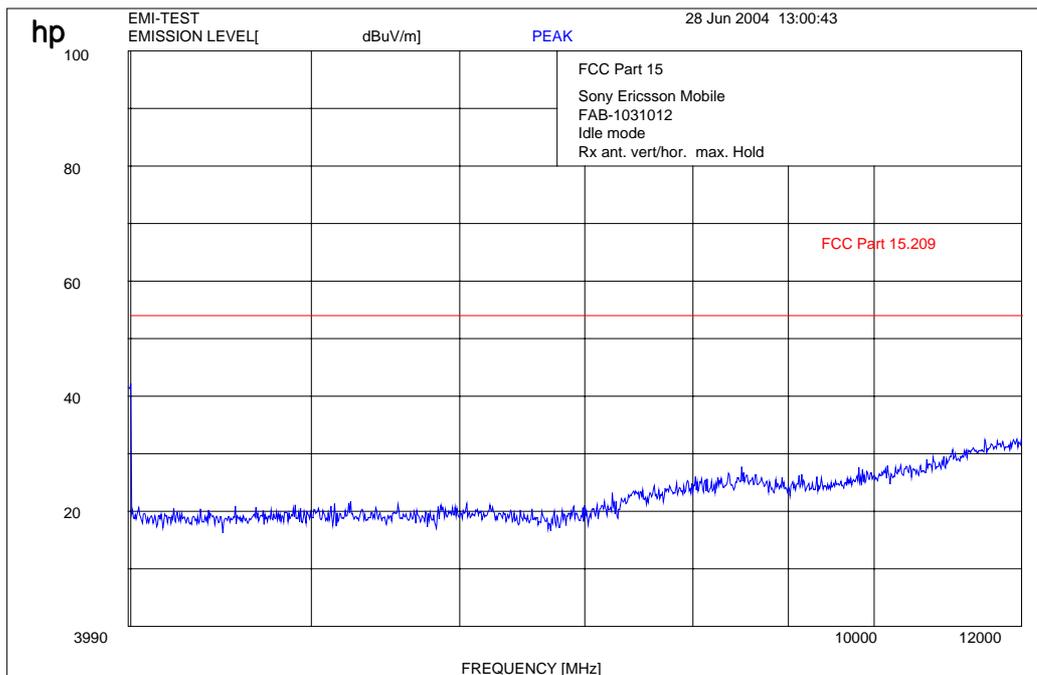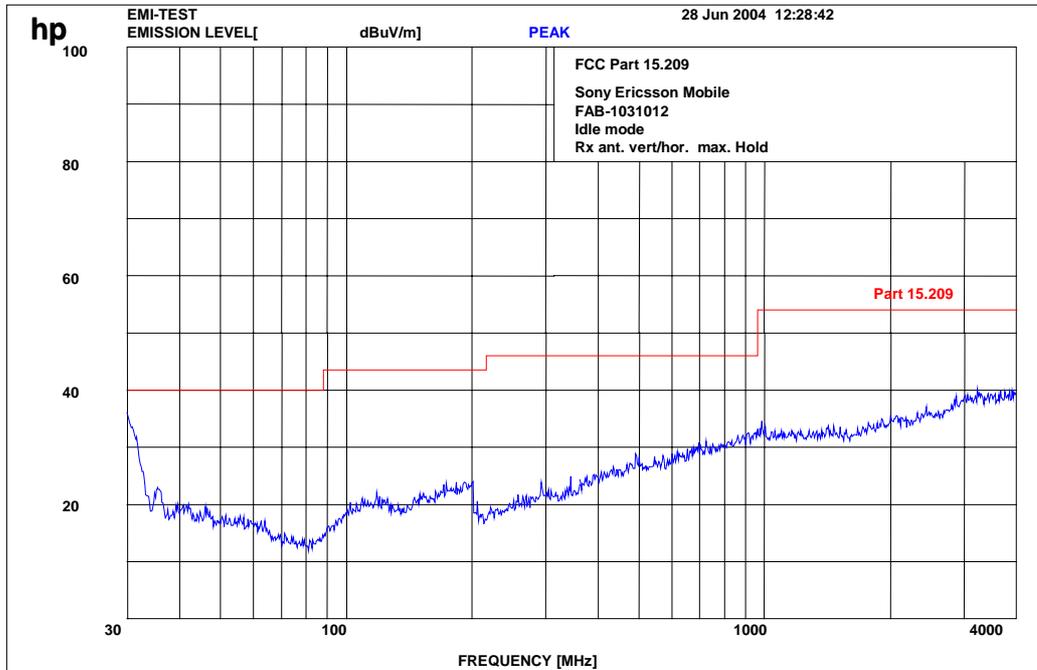

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

3.2.5 Conducted Spurious Emissions

Reference

FCC:	CFR Part 22.917, 1.1051
IC:	RSS 132, Issue 1, Section 4.5 and 6.5

Measurement Procedure

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.
2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter Channel Frequency

128 824.2 MHz

189 836.2 MHz

251 848.8 MHz

Measurement Limit

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Measurement Results

Harmonic	Tx CH.-128 Freq. (MHz)	Level (dBm)	Tx CH.-190 Freq. (MHz)	Level (dBm)	Tx CH.-251 Freq. (MHz)	Level (dBm)
2	1648.4	-	1673.2	-	1697.6	-
3	2472.6	-	2509.8	-	2546.4	-
4	3296.8	-	3346.4	-	3395.2	-
5	4121.0	-	4183.0	-	4244.0	-
6	4945.2	-	5019.6	-	5092.8	-
7	5769.4	-	5856.2	-	5941.6	-
8	6593.6	-	6692.8	-	6790.4	-
9	7417.8	-	7529.4	-	7639.2	-
10	8242.0	-	8366.0	-	8488.0	-

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 57 (97)

Channel: 128



Marker 1 [T1]


RBW 1 MHz RF Att 30 dB

Ref Lvl 32.09 dBm

VBW 1 MHz

34 dBm 811.63143487 MHz

SWT 52 ms Unit dBm

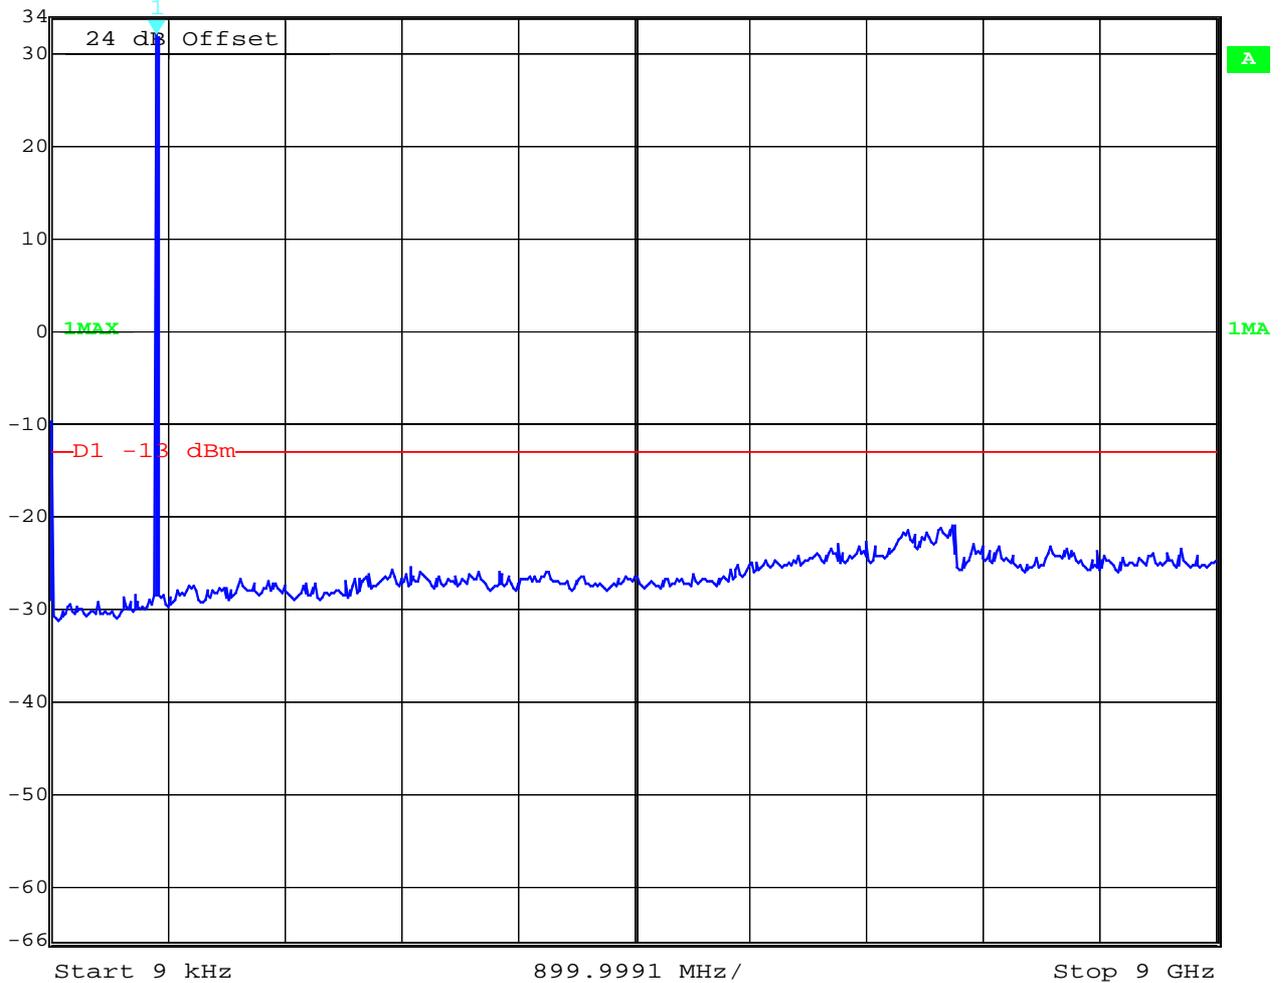

Date: 28.JUN.2004 14:19:06

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 58 (97)

Channel 189



Marker 1 [T1]

RBW 1 MHz RF Att 30 dB

Ref Lvl

32.27 dBm

VBW 1 MHz


34 dBm

847.70354309 MHz

SWT 52 ms

Unit

dBm

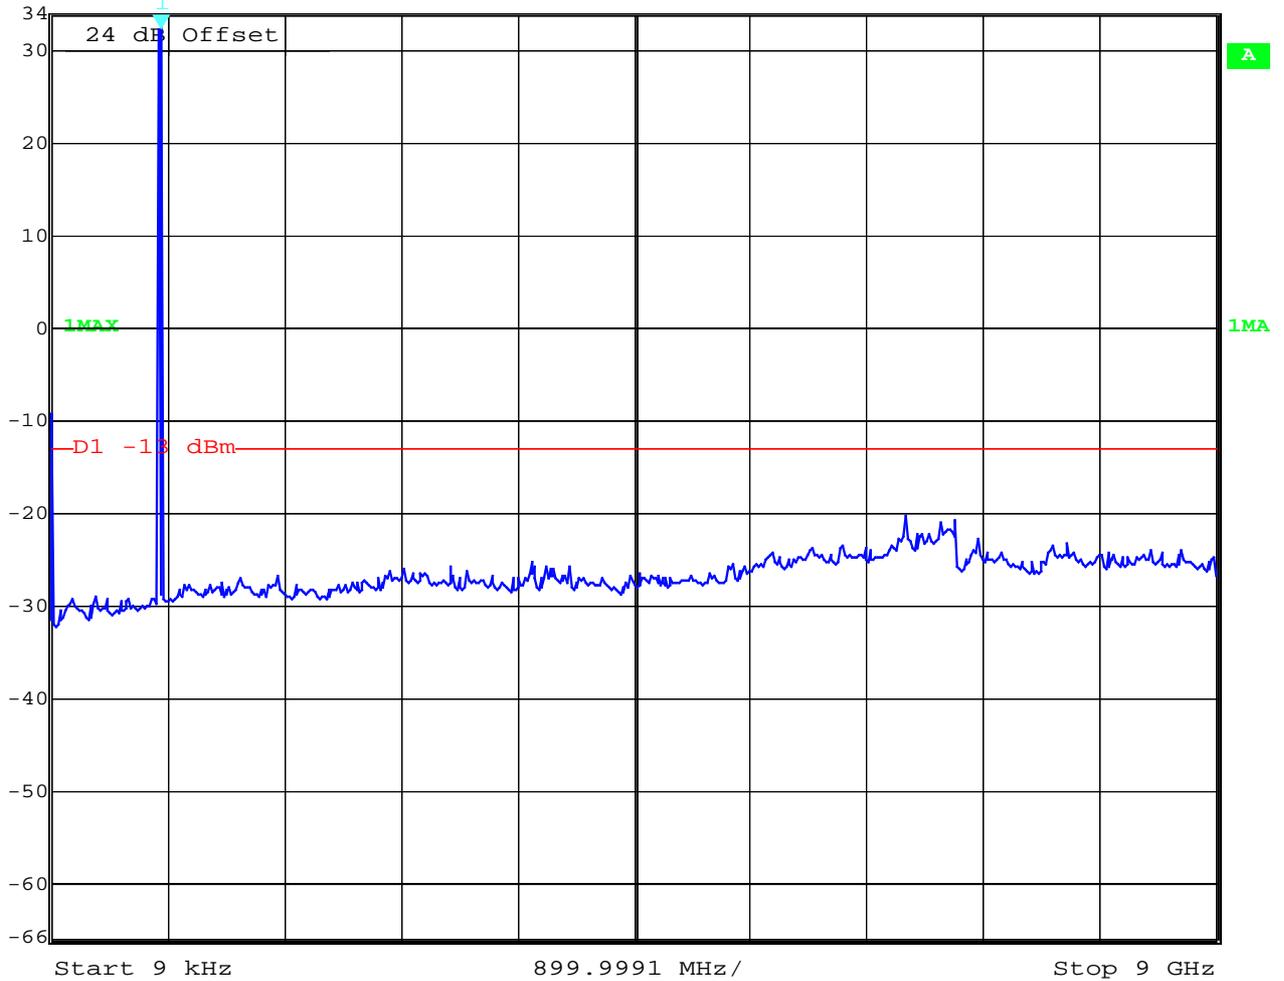

Date: 28.JUN.2004 14:21:30

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 59 (97)

Channel 251



Marker 1 [T1]

RBW 1 MHz RF Att 30 dB


Ref Lvl 32.45 dBm

VBW 1 MHz

34 dBm 829.66748898 MHz

SWT 52 ms

Unit dBm

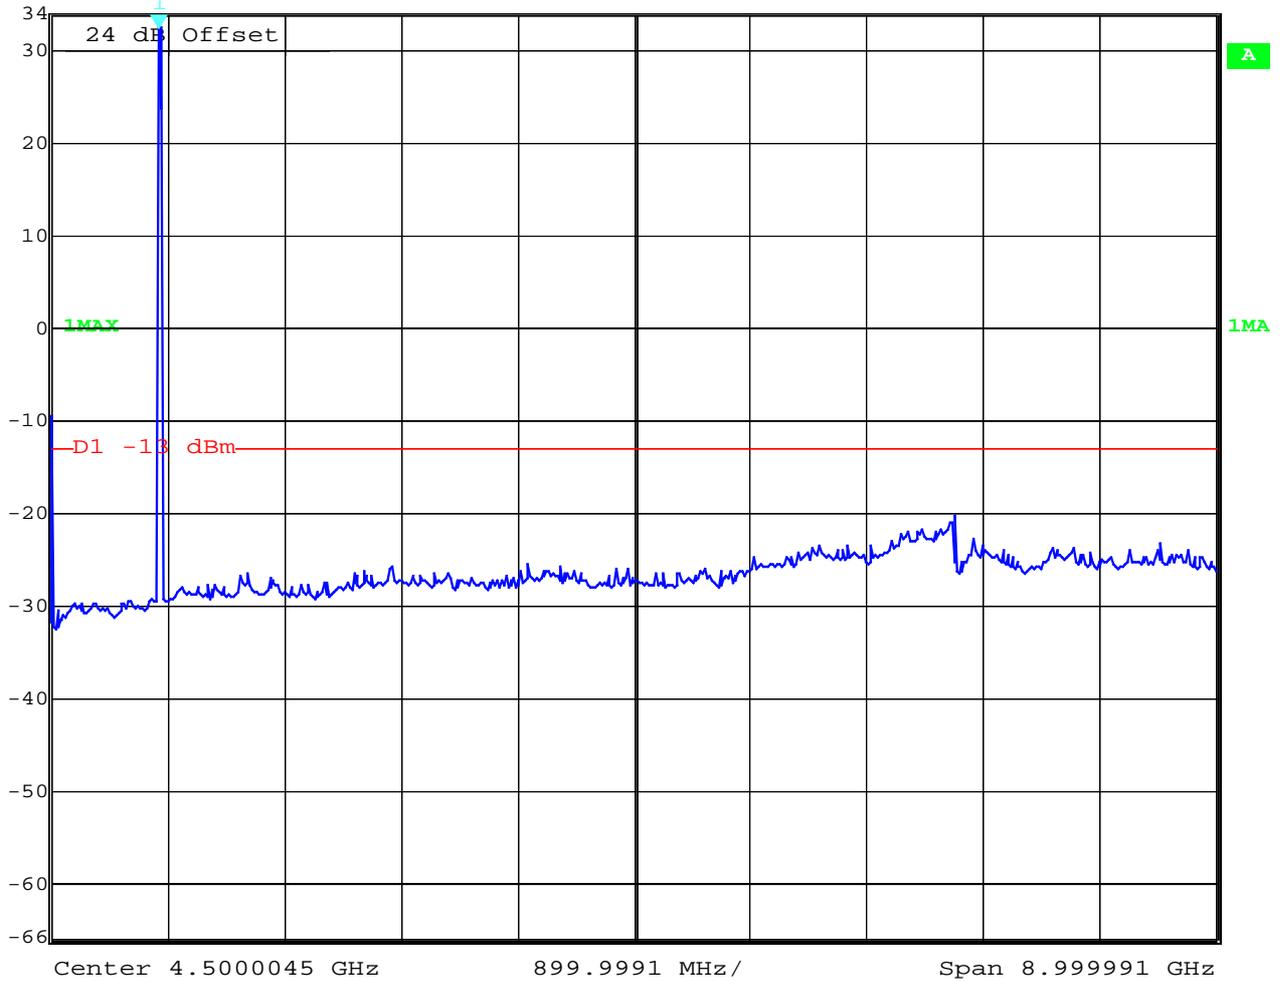

Date: 28.JUN.2004 14:22:33

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 60 (97)

3.2.6 Block Edge Compliance

Reference

FCC:	CFR Part 22.917
IC:	RSS 132, Issue 1, Section 6.5

Measurement Limit:

Sec. 22.917(b) Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +33 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 61 (97)

Block 1 Channel 128



Marker 1 [T1]

RBW 3 kHz RF Att 30 dB

Ref Lvl -18.27 dBm

VBW 3 kHz


34 dBm

823.97795591 MHz

SWT 280 ms

Unit

dBm

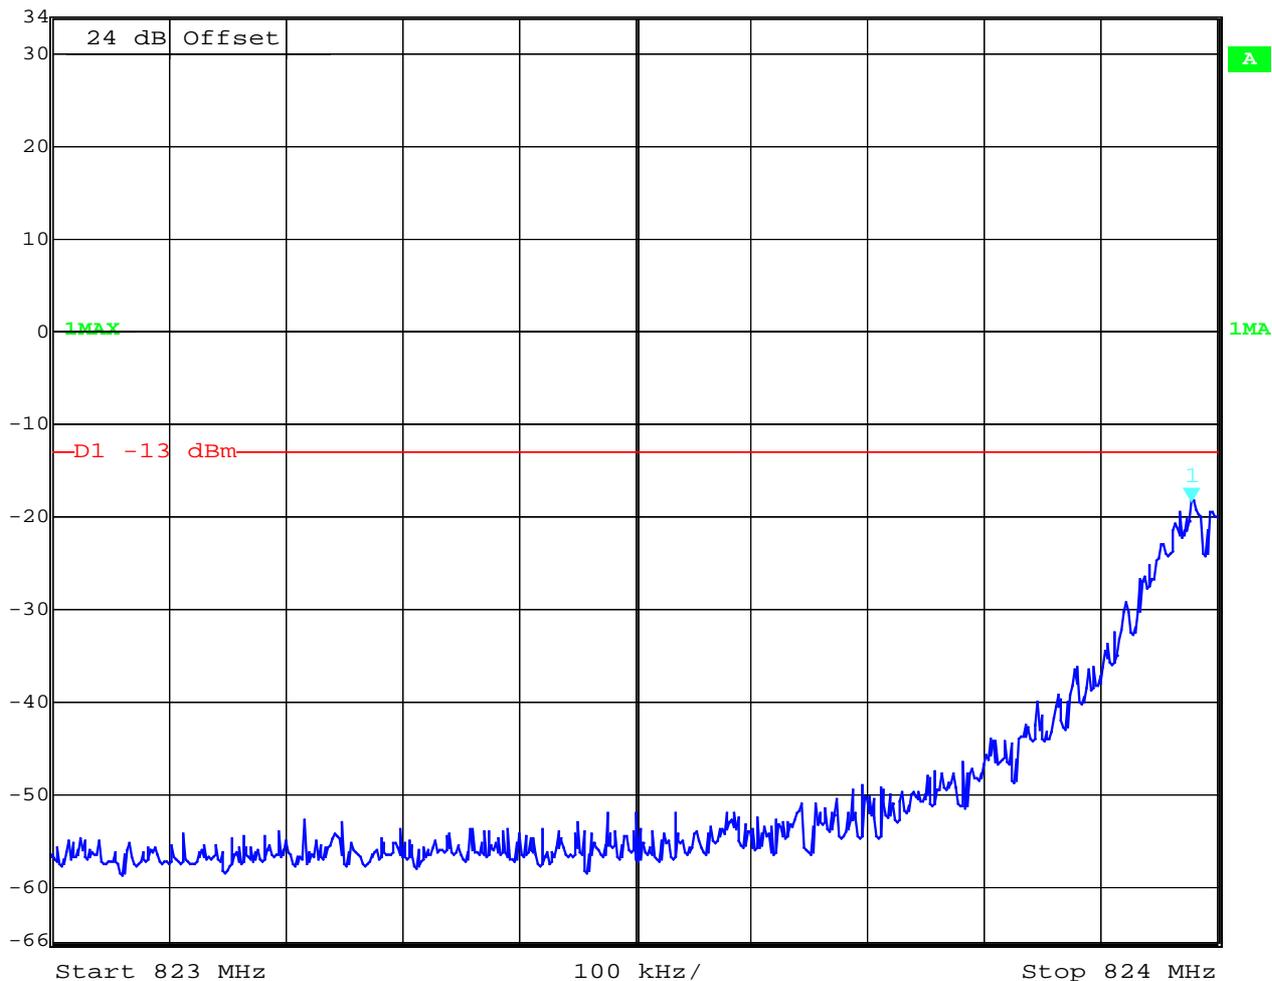

Date: 28.JUN.2004 14:27:57

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 62 (97)

Block 4 Channel 251



Ref Lvl	34 dBm	Marker 1 [T1]	849.01803607 MHz	RBW	3 kHz	RF Att	30 dB
				VBW	3 kHz		
				SWT	280 ms	Unit	dBm

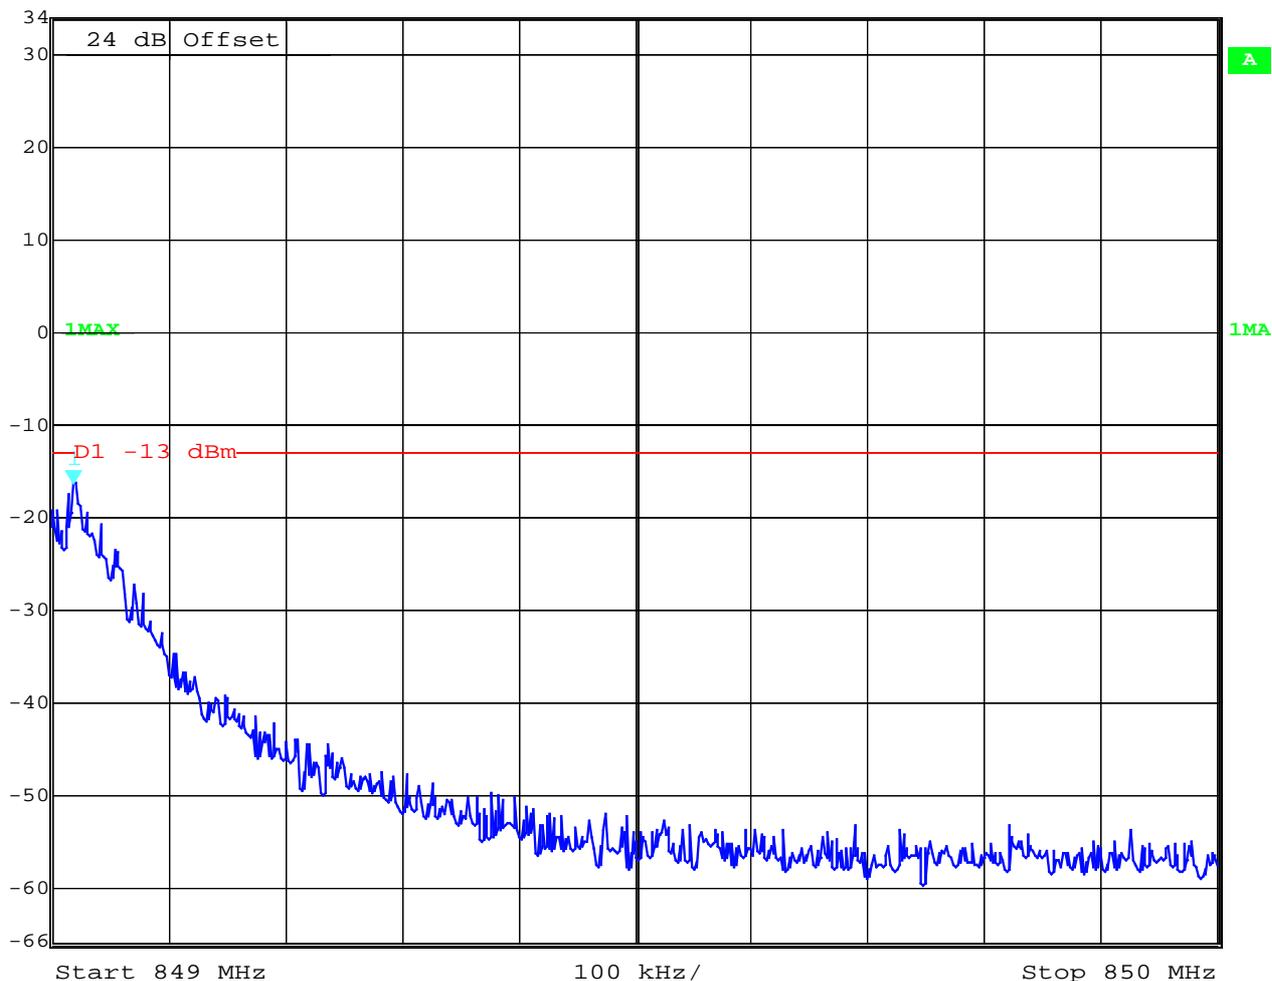

Date: 28.JUN.2004 14:29:32

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 63 (97)

3.2.7 Occupied Bandwidth

Reference

FCC:	CFR Part 22.917, 2.1049
IC:	RSS 132, Issue 1, Section 4.2

Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth (kHz)	-26 dBc Bandwidth (kHz)
824.2 MHz	294.589	326.653
836.4 MHz	296.593	322.645
848.8 MHz	288.577	320.641

Part 22 requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 300 kHz, this equates to a resolution bandwidth of at least 3 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 64 (97)

Channel 128 99% (-20 dB) Occupied Bandwidth



	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
Ref Lvl	-0.58 dB	VBW	3 kHz		
23.4 dBm	294.58917836 kHz	SWT	280 ms	Unit	dBm

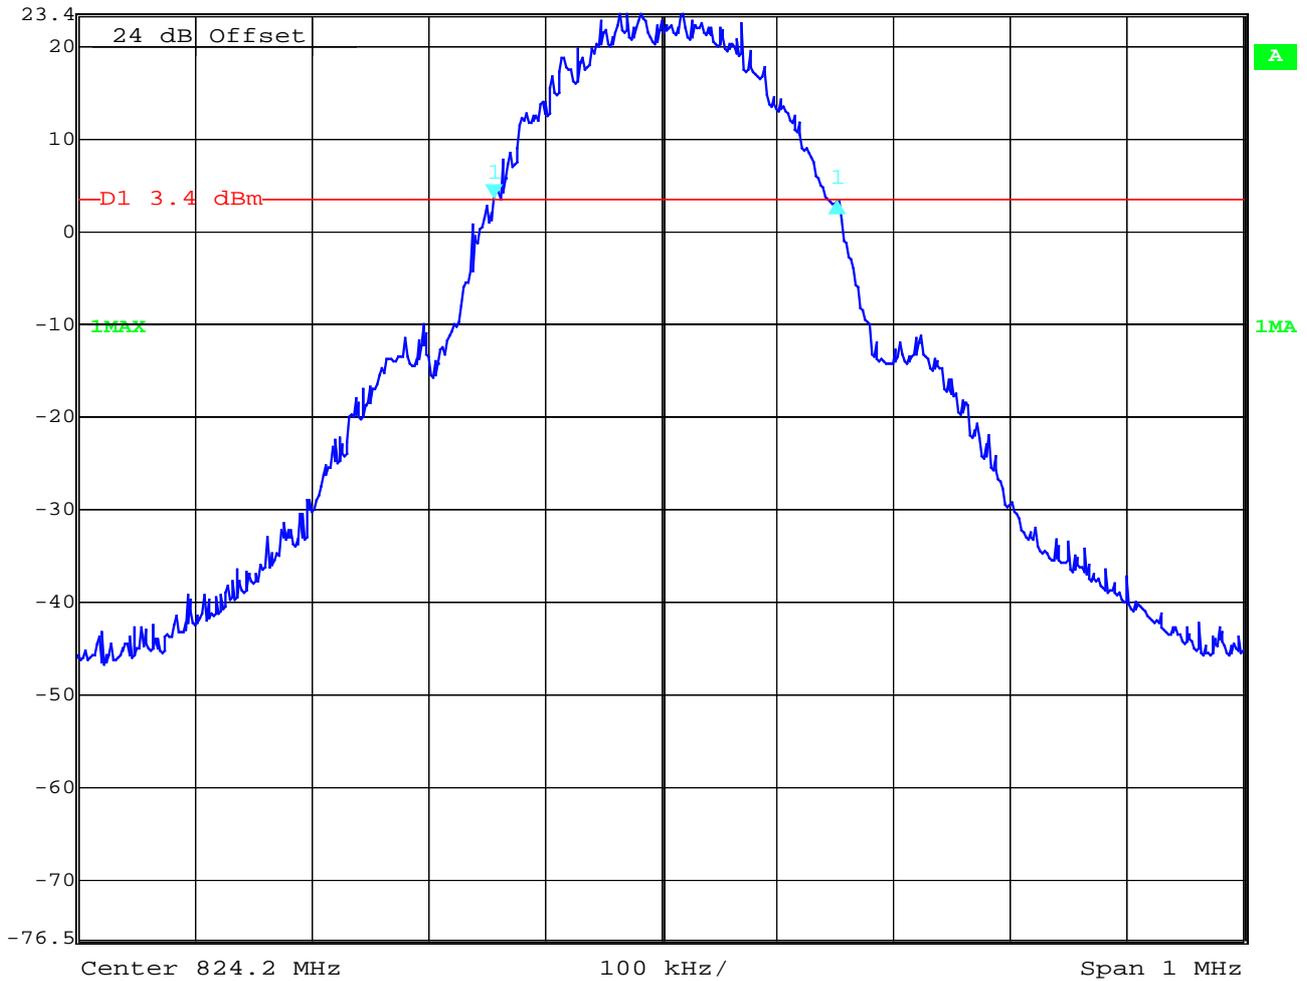

Date: 28.JUN.2004 14:32:46

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 65 (97)

Channel 128 -26 dBc Bandwidth



	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
Ref Lvl	-0.89 dB	VBW	3 kHz		
23.4 dBm	326.65330661 kHz	SWT	280 ms	Unit	dBm

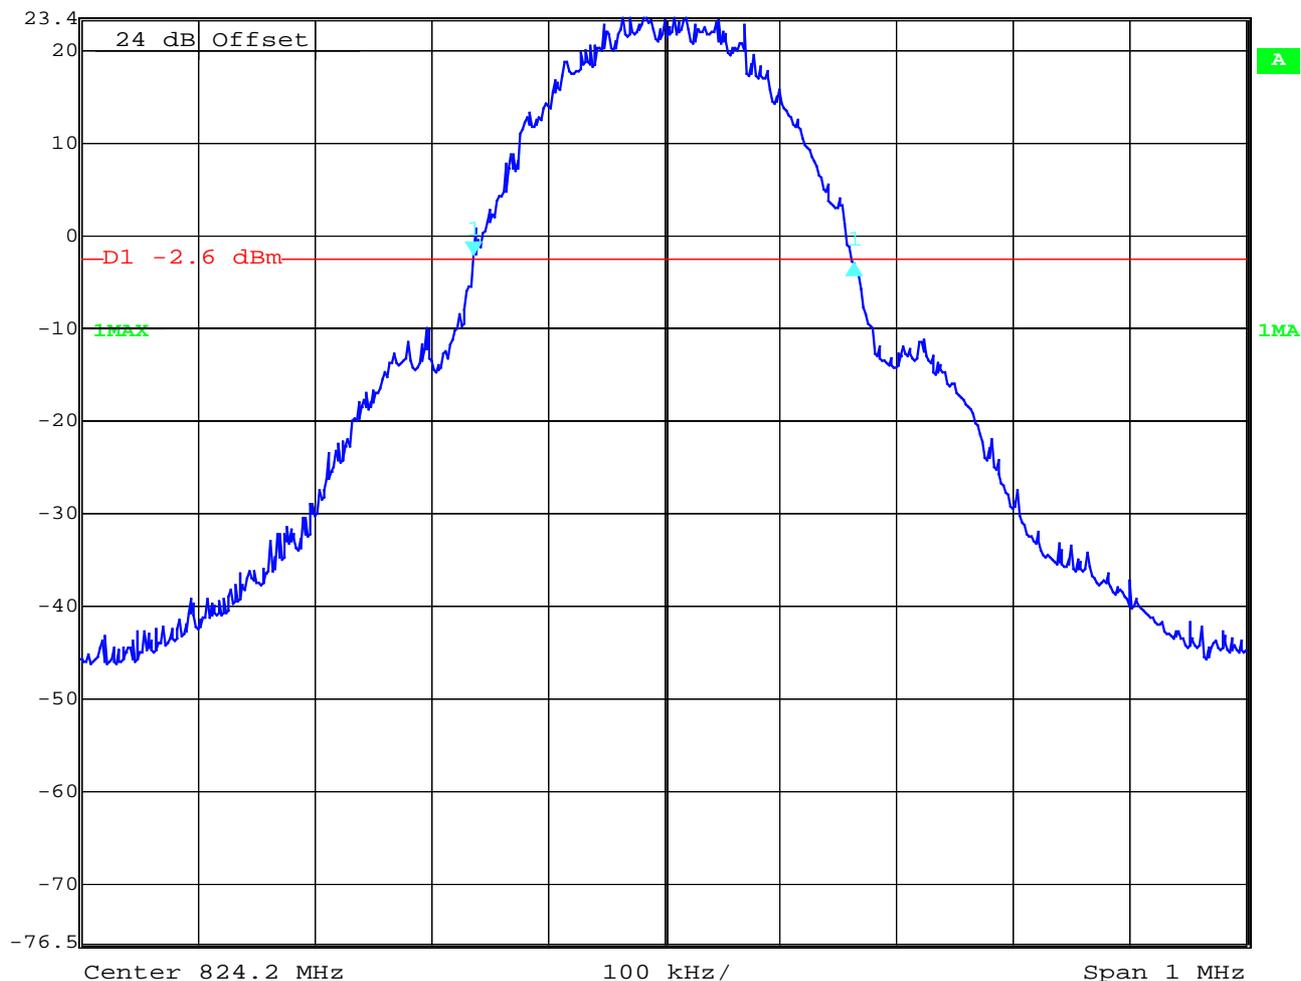

Date: 28.JUN.2004 14:33:56

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 66 (97)

Channel 189 99% (-20 dB) Occupied Bandwidth



	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
Ref Lvl	0.33 dB	VBW	3 kHz		
23.6 dBm	296.59318637 kHz	SWT	280 ms	Unit	dBm

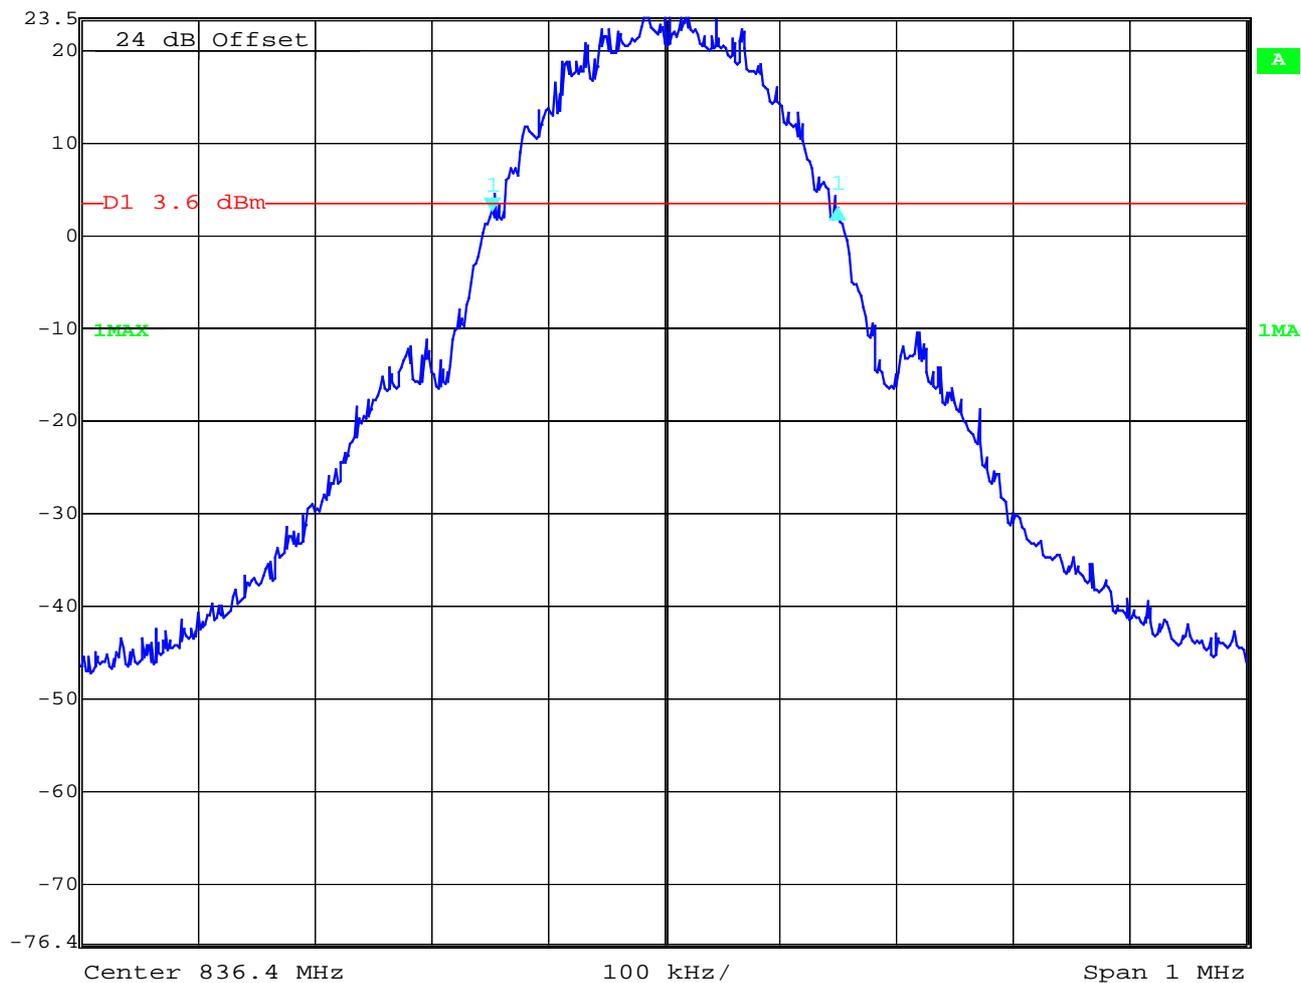

Date: 28.JUN.2004 14:37:17

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 67 (97)

Channel 189 -26 dBc Bandwidth



Delta 1 [T1]

RBW 3 kHz RF Att 30 dB

Ref Lvl

0.78 dB

VBW 3 kHz


23.6 dBm

322.64529058 kHz

SWT 280 ms

Unit

dBm

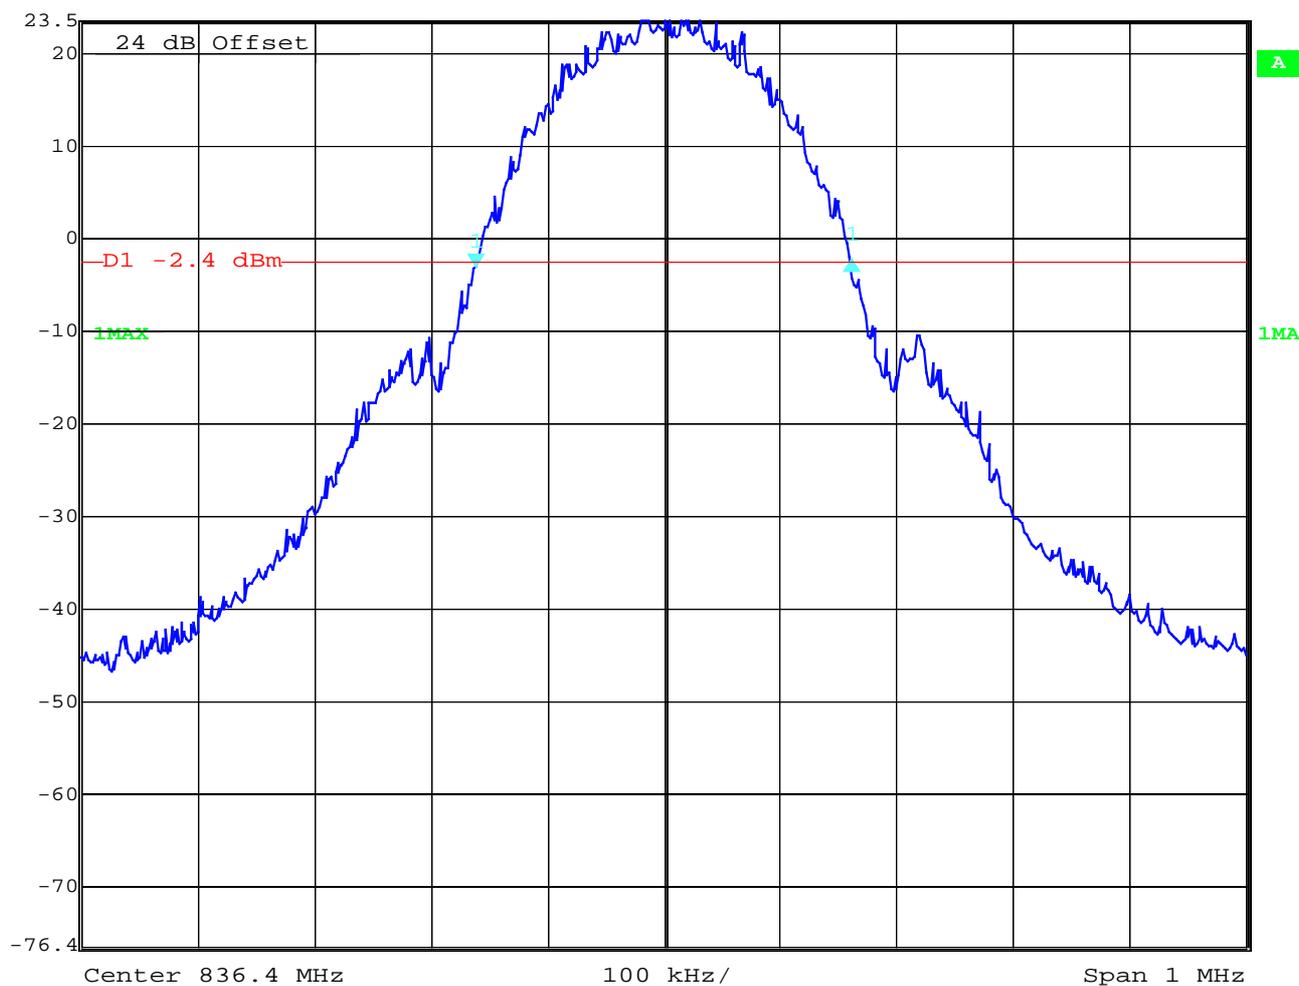

Date: 28.JUN.2004 14:38:25

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 68 (97)

Channel 251 99% (-20 dB) Occupied Bandwidth



	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
Ref Lvl	0.20 dB	VBW	3 kHz		
23.8 dBm	288.57715431 kHz	SWT	280 ms	Unit	dBm

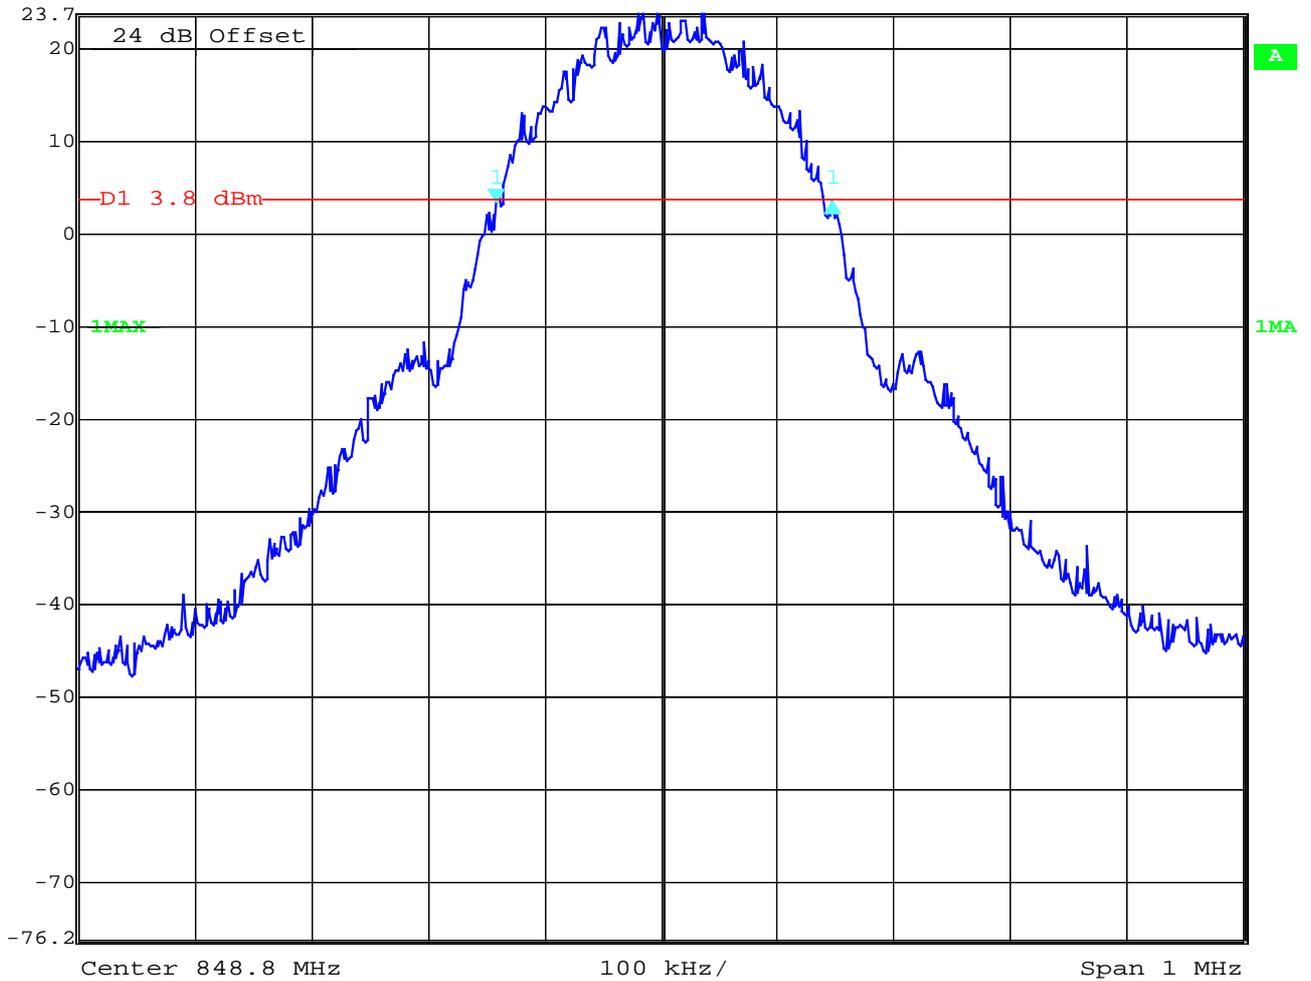

Date: 28.JUN.2004 14:40:12

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 69 (97)

Channel 251 -26 dBc Bandwidth



	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
Ref Lvl	-0.05 dB	VBW	3 kHz		
23.8 dBm	320.64128257 kHz	SWT	280 ms	Unit	dBm

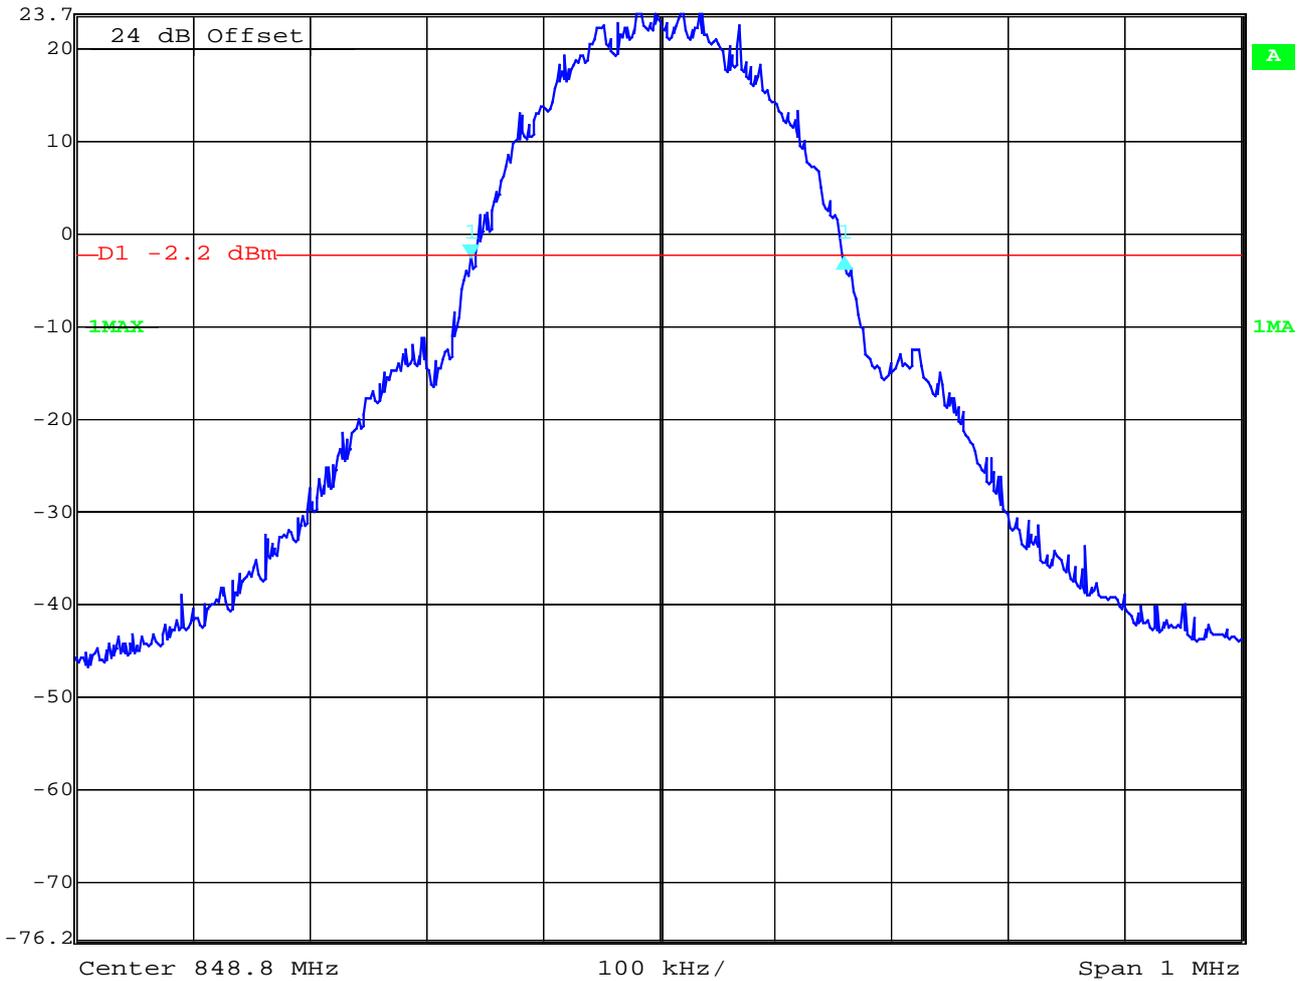

Date: 28.JUN.2004 14:41:15

3.2.8 Mobile Emissions in the Base Frequency Range**Reference**

FCC:	CFR Part 22.917(f)
IC:	-

Limits

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

Measurement results

All peaks are below -80 dBm in the base frequency range.

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 71 (97)

Idle Mode - Cellular Base Frequency Range



Marker 1 [T1]


RBW 3 kHz RF Att 0 dB

Ref Lvl -20.2 dBm -88.02 dBm

VBW 3 kHz

876.00200401 MHz

SWT 8.4 s Unit dBm

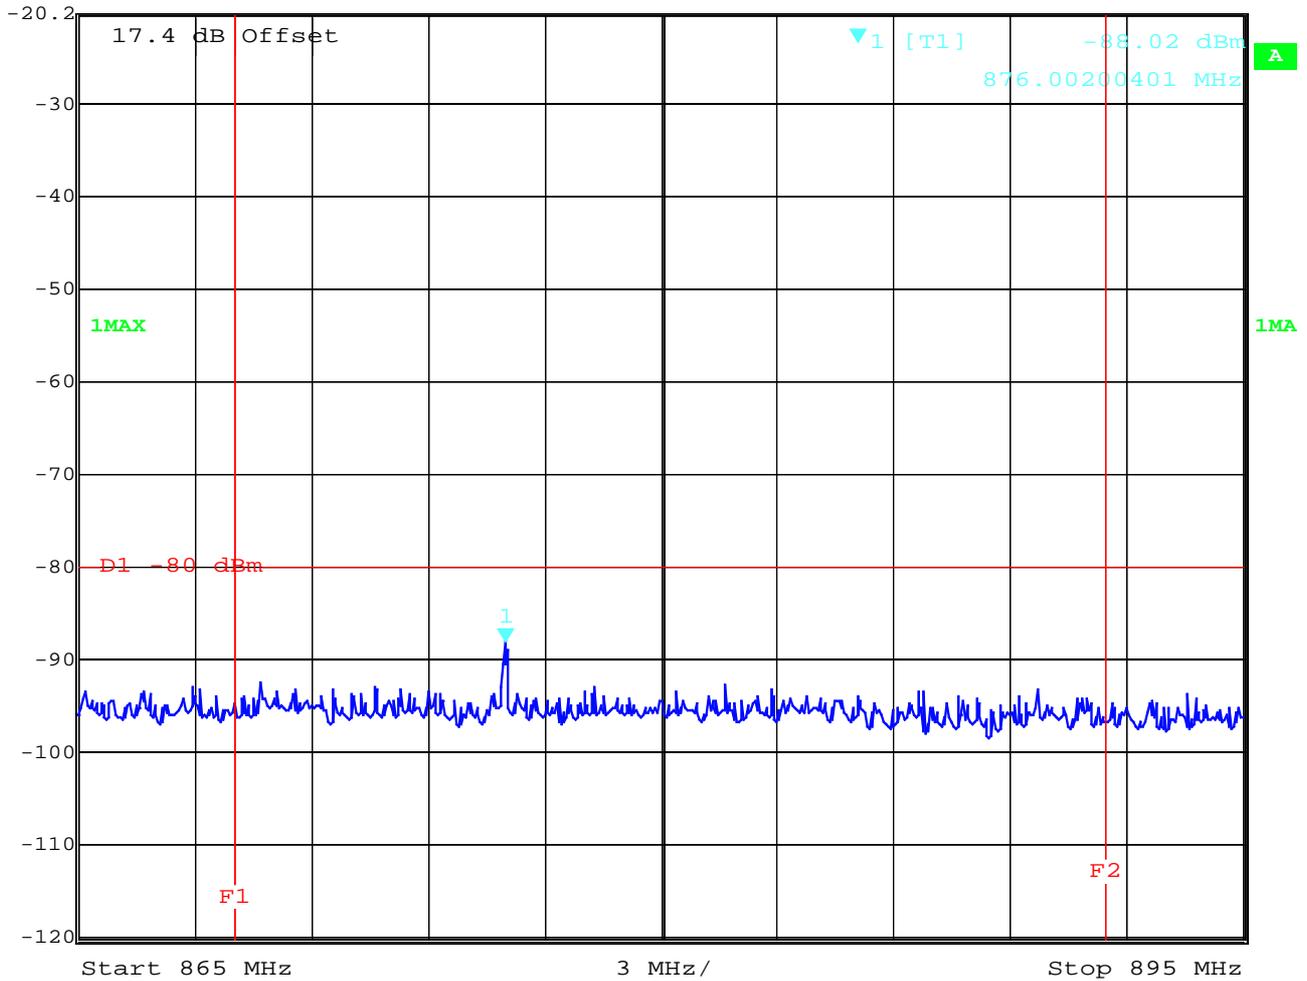

Date: 28.JUN.2004 15:20:57
 F1 = 869 MHz, F2 = 894 MHz

CETECOM ICT Services GmbH


Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 72 (97)

TX Mode CH 128 - Cellular Base Frequency Range A

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-20 dBm	-82.87 dBm	VBW	3 kHz		
		876.00200401 MHz	SWT	8.4 s	Unit	dBm

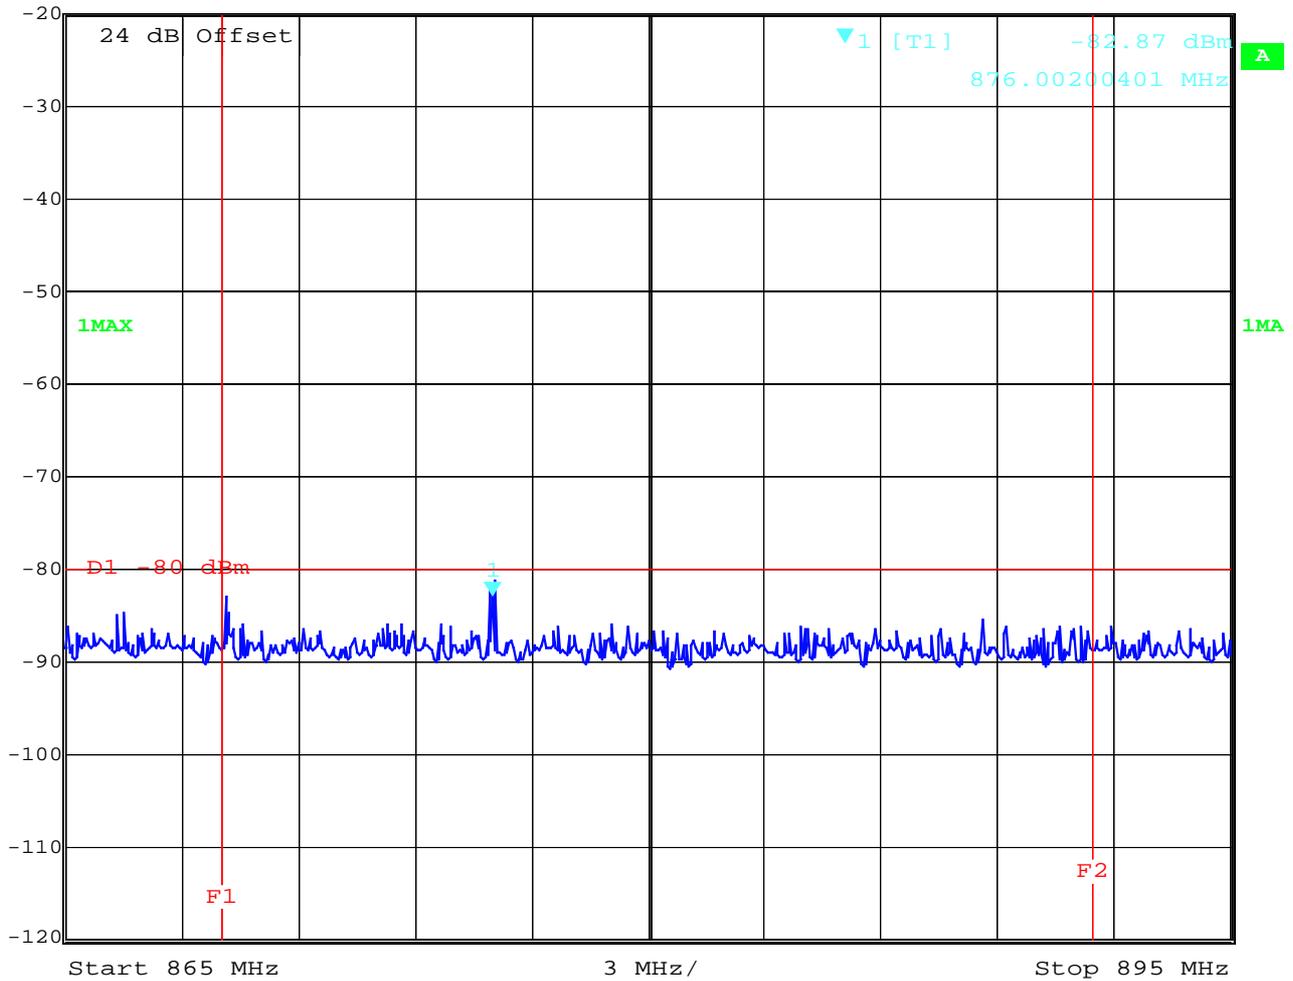

Date: 28.JUN.2004 14:57:31
 F1 = 869 MHz, F2 = 894 MHz

CETECOM ICT Services GmbH


Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 73 (97)

TX Mode CH 189 - Cellular Base Frequency Range A

OVLD Marker 1 [T1] RBW 3 kHz RF Att 0 dB
 Ref Lvl -20.2 dBm -87.04 dBm VBW 3 kHz
875.94188377 MHz SWT 8.4 s Unit dBm

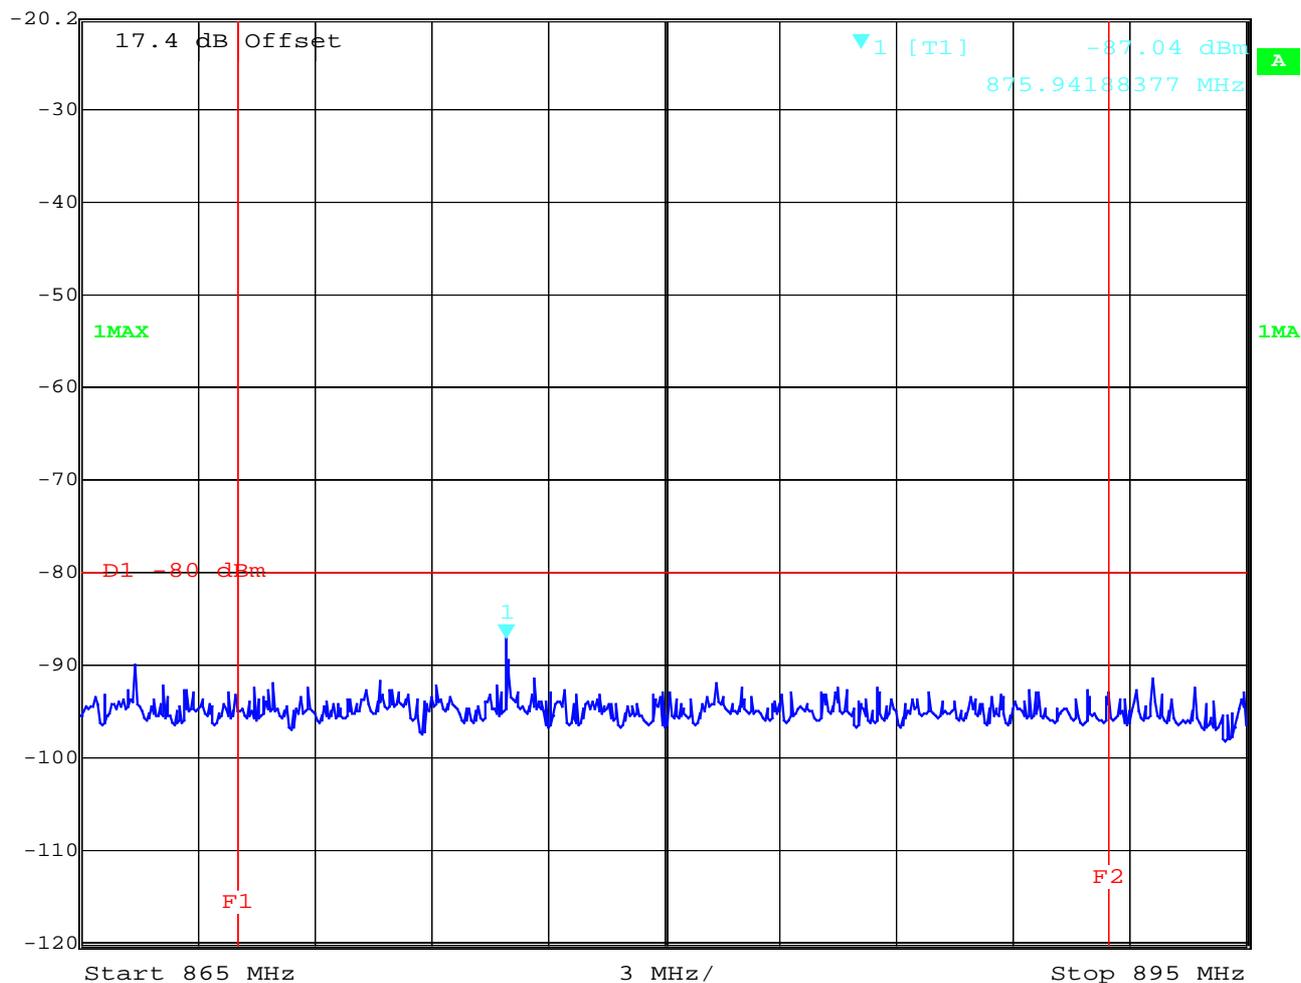

Date: 28.JUN.2004 15:15:52
 F1 = 869 MHz, F2 = 894 MHz

CETECOM ICT Services GmbH


Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 74 (97)

TX Mode CH 251 - Cellular Base Frequency Range A

	OVLD	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	Ref Lvl	-88.90 dBm	VBW	3 kHz		
	-20.2 dBm	876.00200401 MHz	SWT	8.4 s	Unit	dBm

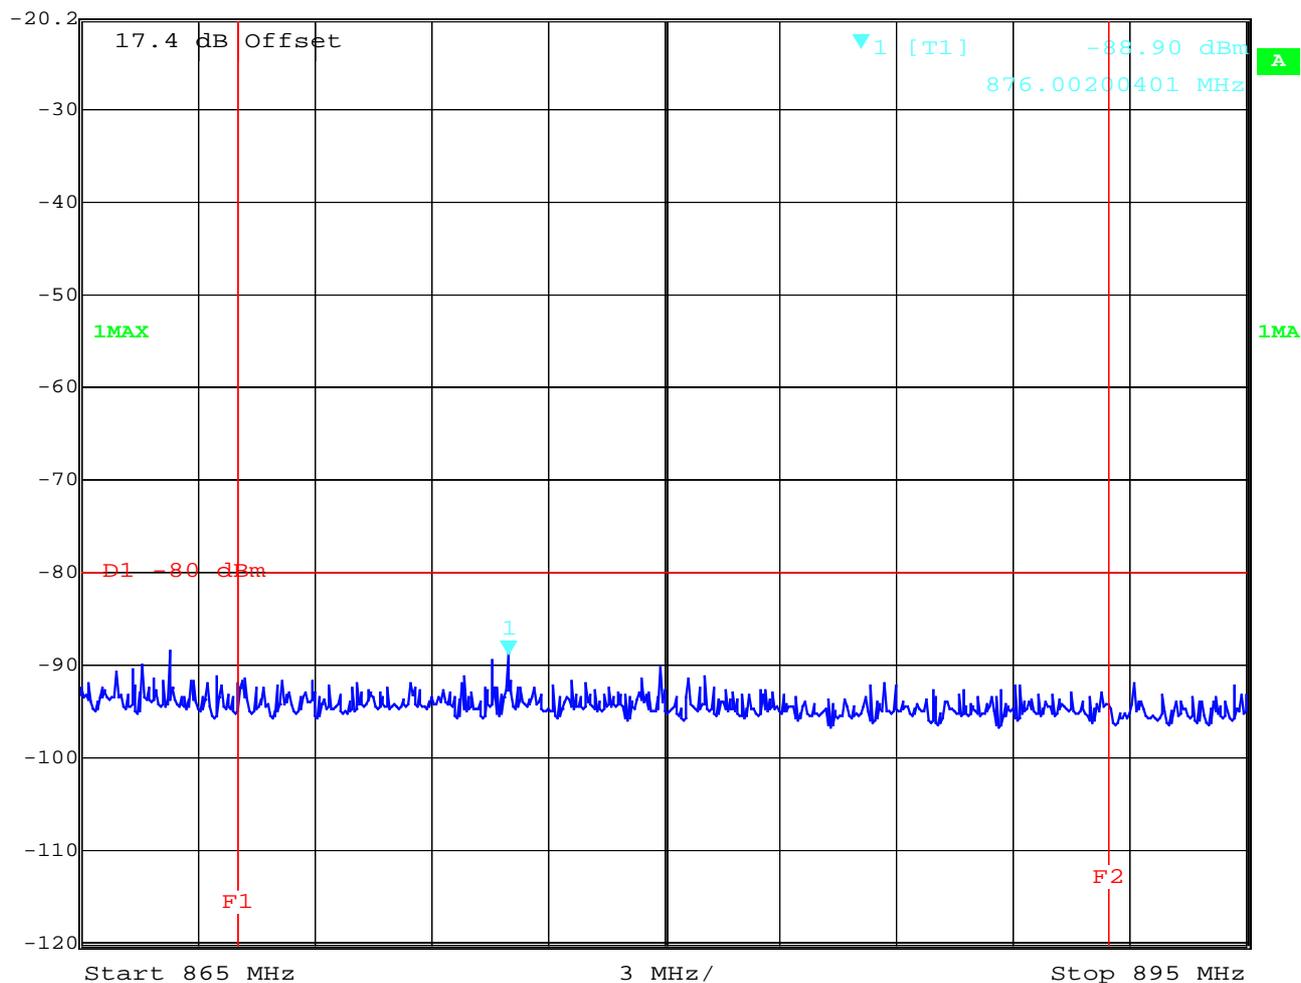

Date: 28.JUN.2004 15:18:06

F1 = 869 MHz, F2 = 894 MHz

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 75 (97)

TX Mode CH 128 - Cellular Base Frequency Range B



Marker 1 [T1]

RBW 3 kHz RF Att 0 dB


Ref Lvl -20.2 dBm -95.26 dBm

VBW 3 kHz

884.60120240 MHz

SWT 5 s

Unit dBm

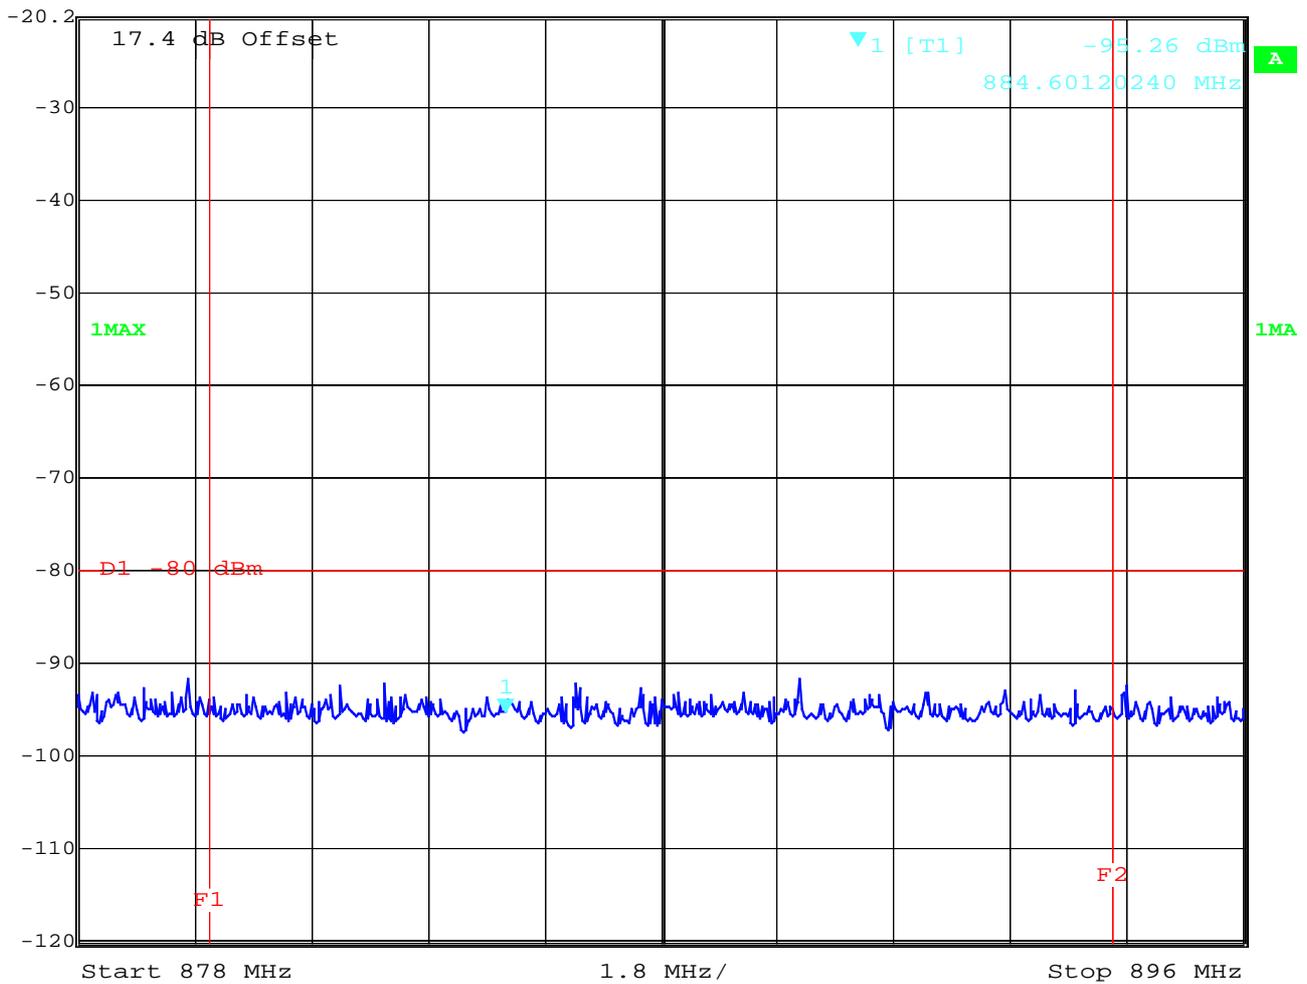

Date: 28.JUN.2004 15:14:08

CETECOM ICT Services GmbH


Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 76 (97)

TX Mode CH 189 - Cellular Base Frequency Range B

OVLD Marker 1 [T1] RBW 3 kHz RF Att 0 dB
 Ref Lvl -20.2 dBm -90.86 dBm VBW 3 kHz
 -20.2 dBm 882.43687375 MHz SWT 5 s Unit dBm

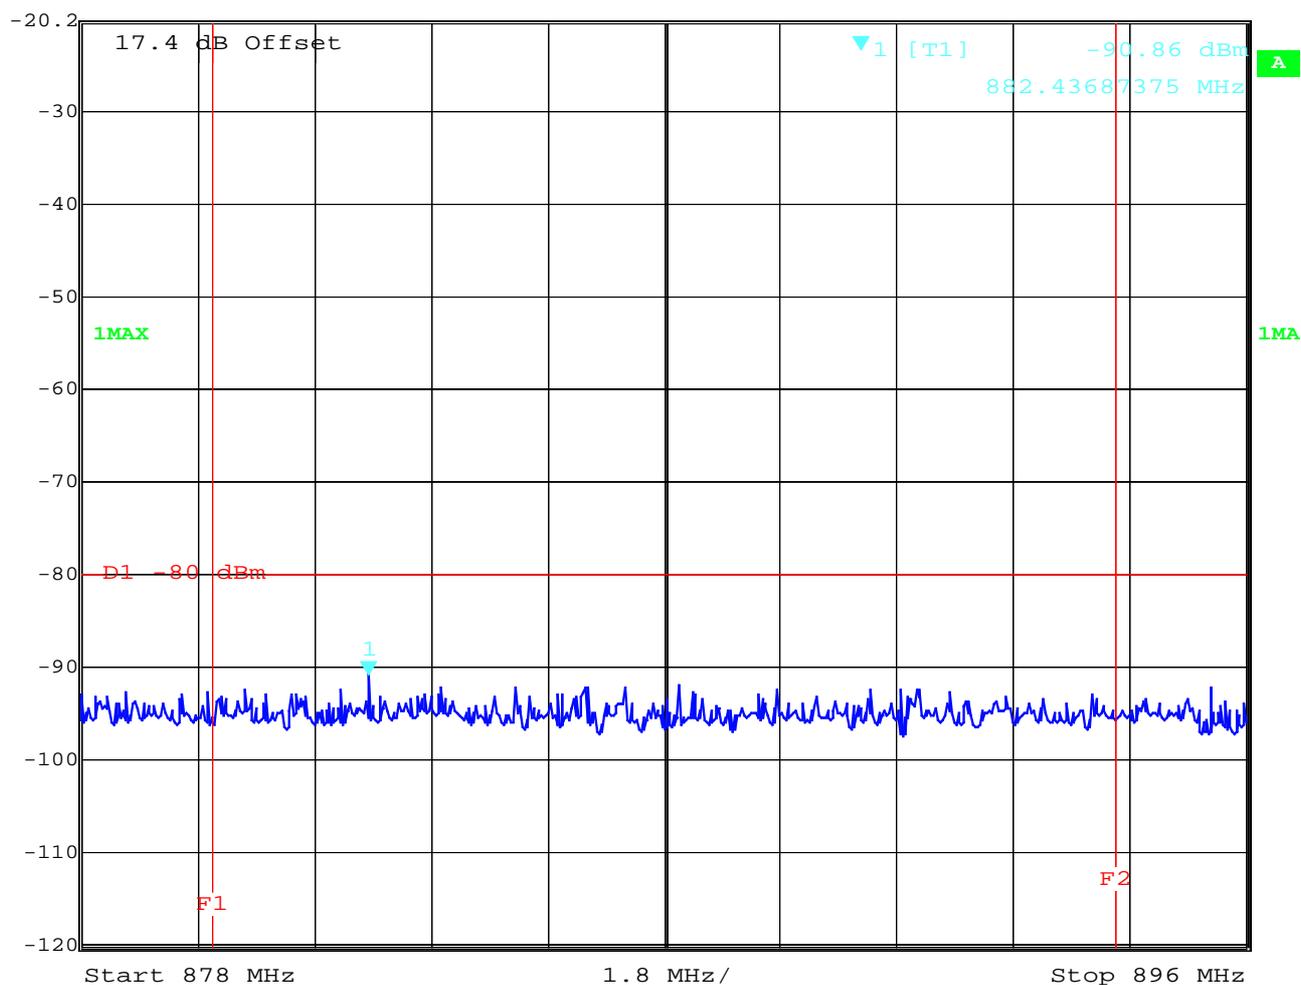

Date: 28.JUN.2004 15:16:48

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04


Date: 2004-07-01

Page 77 (97)

TX Mode CH 251 - Cellular Base Frequency Range B



OVLD Marker 1 [T1] RBW 3 kHz RF Att 0 dB
 Ref Lvl -94.34 dBm VBW 3 kHz
 -20.2 dBm 884.60120240 MHz SWT 5 s Unit dBm

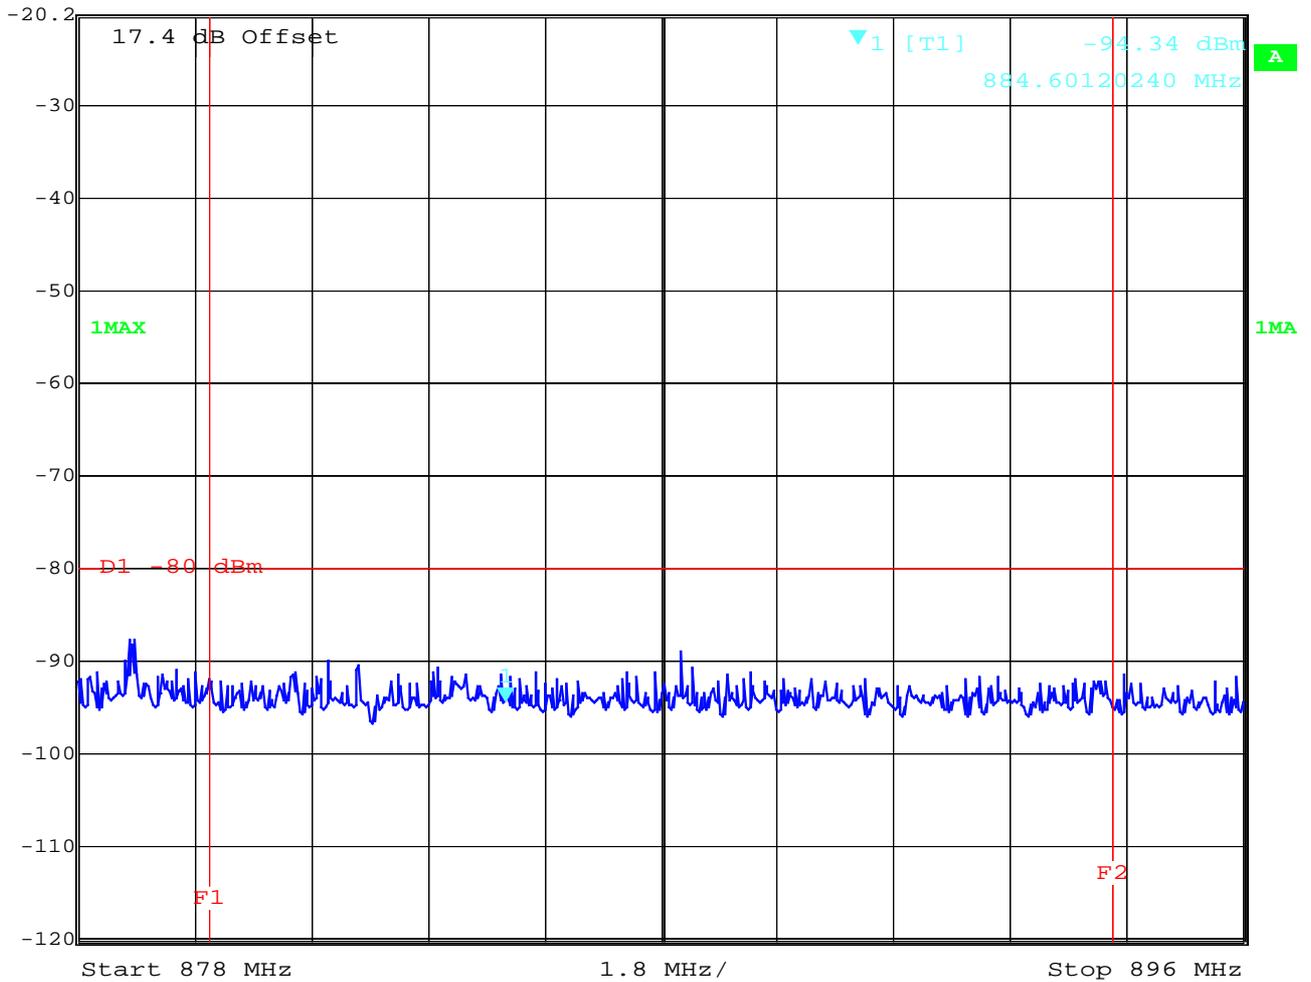

Date: 28.JUN.2004 15:19:23

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 78 (97)

4 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
09	Regulating Transformer	MPL	Erfi	91350
10	LISN	NNLA 8120	Schwarzbeck	8120331
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulation Meter	9008	Racal-Dana	2647
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic Chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenna	3104	Emco	3758
23	Log. Per. Antenna	3146	Emco	2130
24	Double Ridged Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic Chamber		Frankonia	
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 79 (97)

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5-26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773

ANNEX A: Part 15 B Tests

Conducted Limits

Reference


FCC:	CFR Part 15.207, 15.107
IC:	RSS 210, Issue 4, Section 6.6 , 7.4

Limits: § 15.107 / 15.207

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency

EUT: FAB-1031012-xx
 Manufacturer: Sony Ericsson
 Operating Condition: Traffic mode
 Test Site: Room 006 (Shielded chamber)
 Operator: Gillmann
 Start of Test: 30.06.04 / 09:09:36

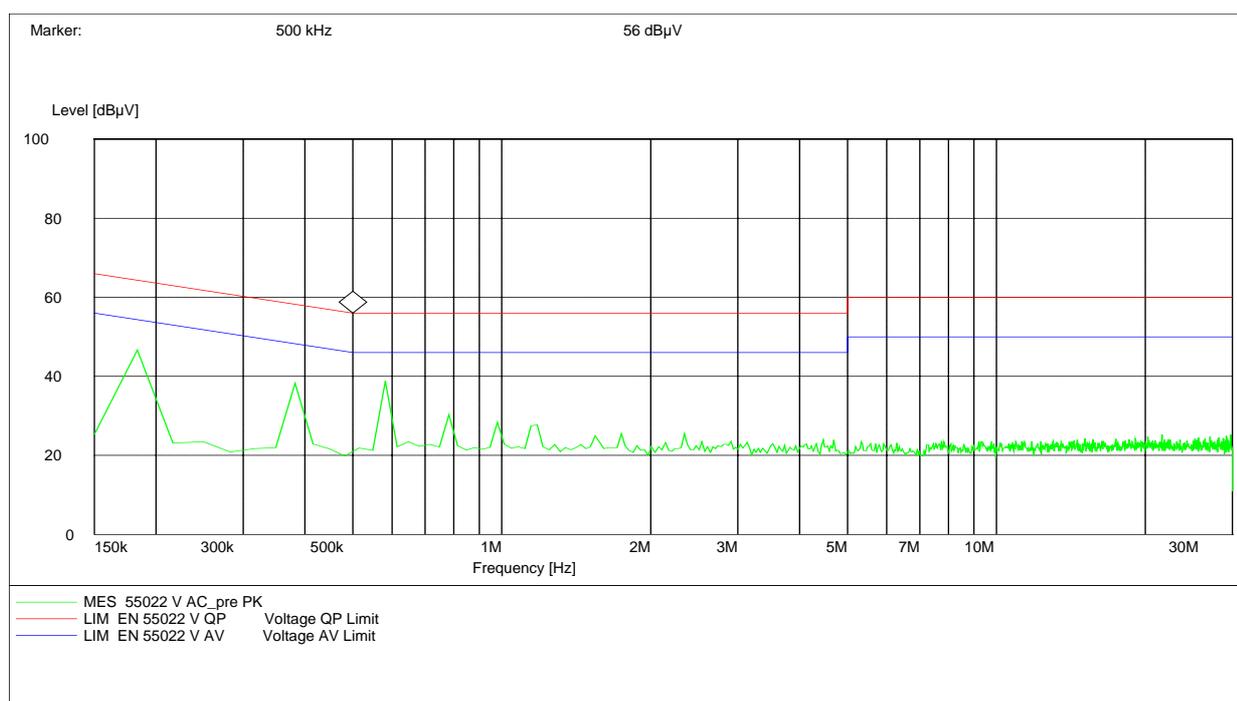

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 81 (97)

Conducted Limits

Reference


FCC:	CFR Part 15.207, 15.107
IC:	RSS 210, Issue 4, Section 6.6 , 7.4


Limits: § 15.107 / 15.207

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency

EUT: FAB-1031012-xx
 Manufacturer: Sony Ericsson
 Operating Condition: Idle mode
 Test Site: Room 006 (Shielded chamber)
 Operator: Gillmann
 Start of Test: 30.06.04 / 09:13:12

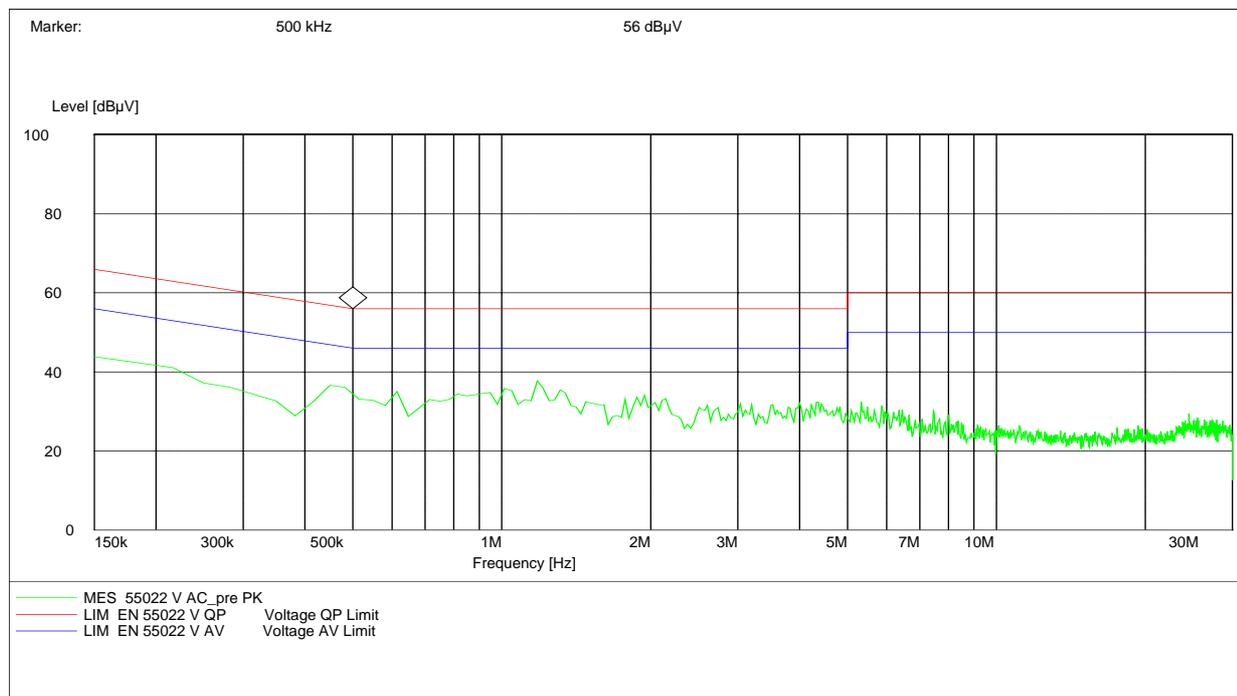

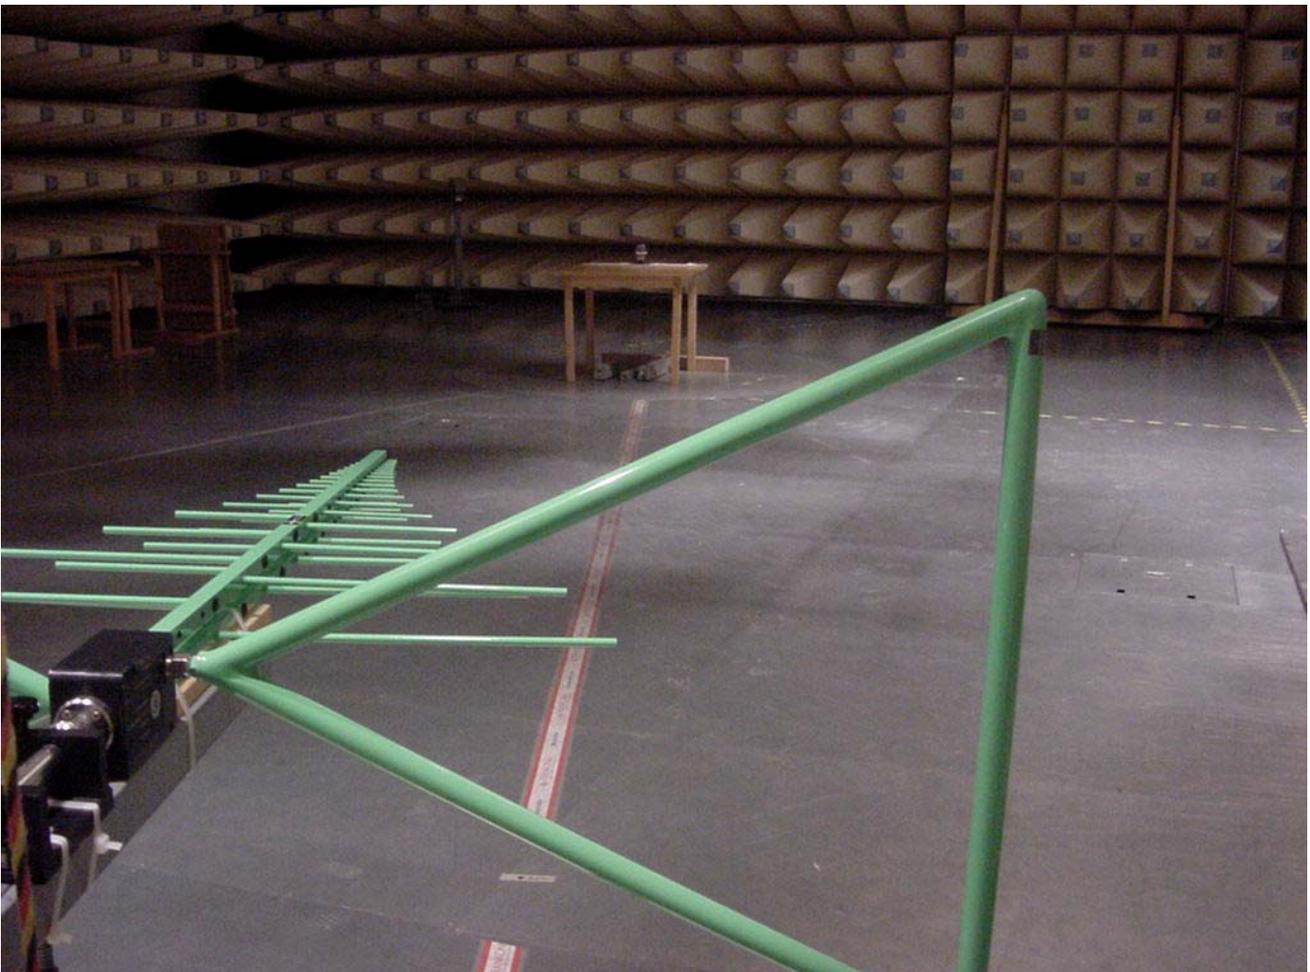
ANNEX B: Test Setup Photos

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 83 (97)

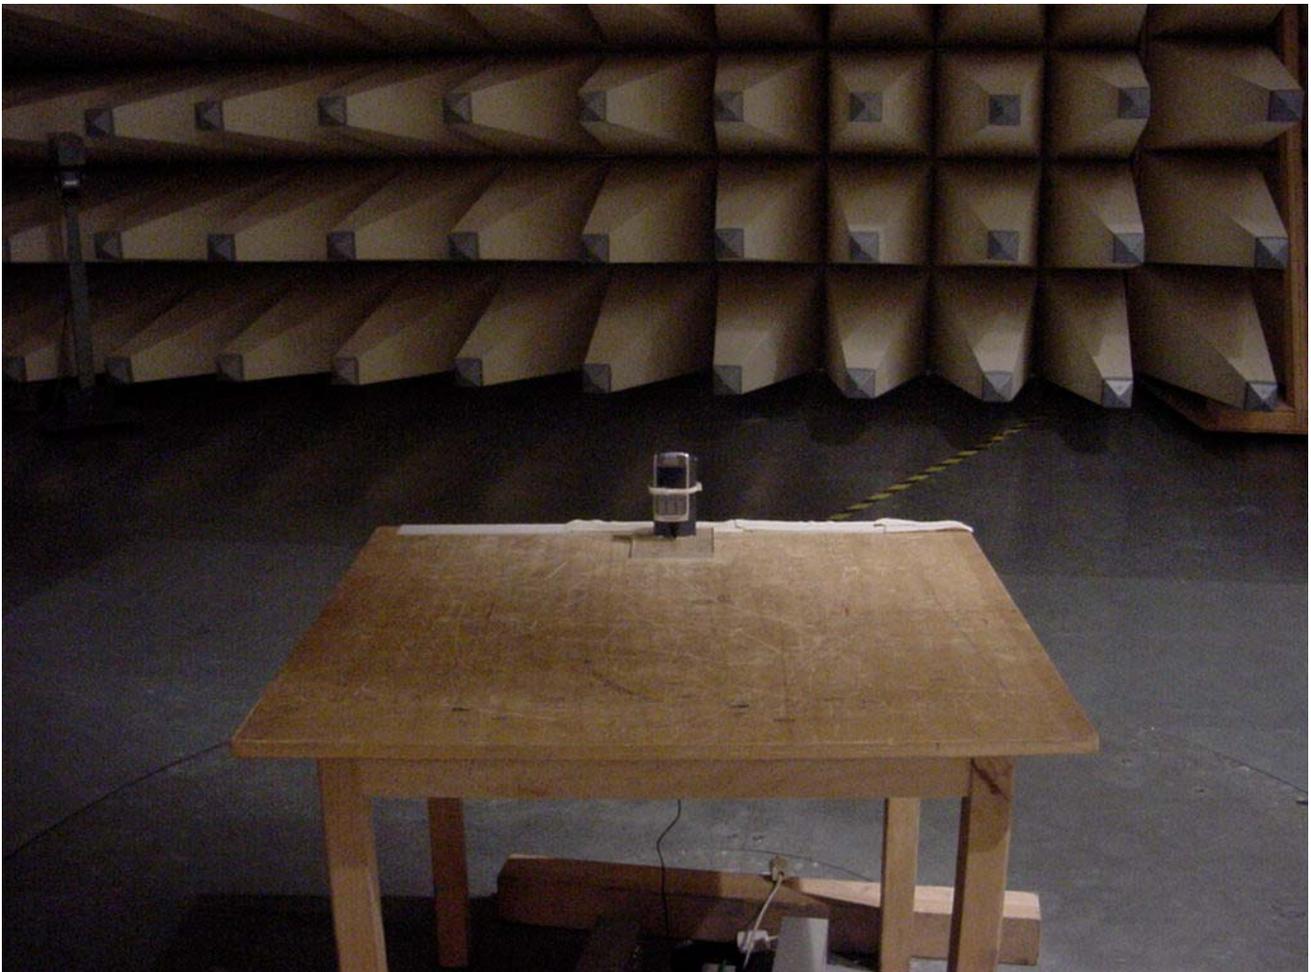

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 84 (97)




CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 85 (97)

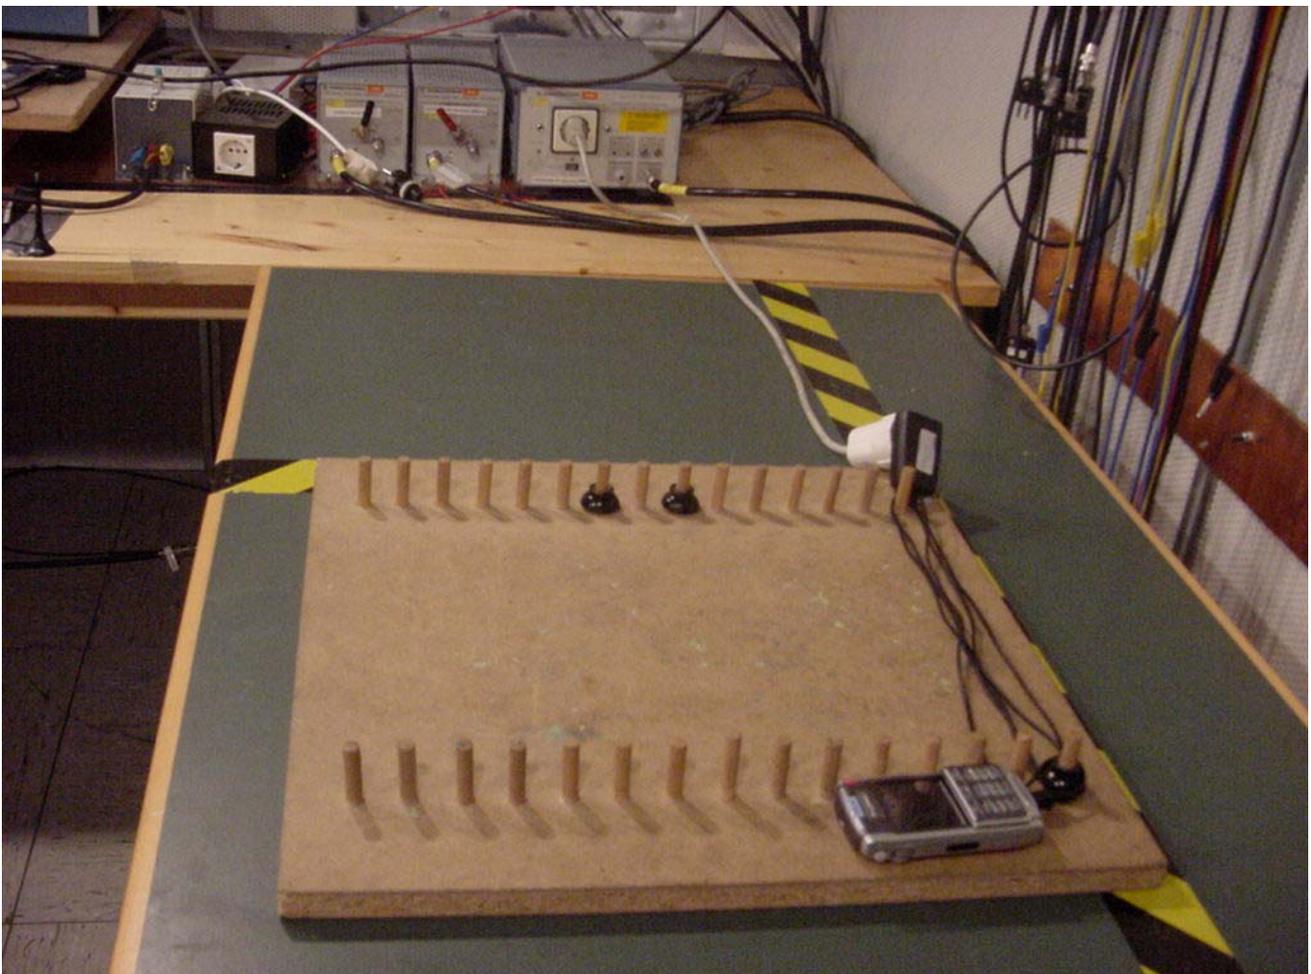

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 86 (97)

ANNEX C: External Photos



CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 87 (97)



CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 88 (97)



CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 89 (97)



ANNEX D: Internal Photos

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 91 (97)



CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 92 (97)




CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 93 (97)

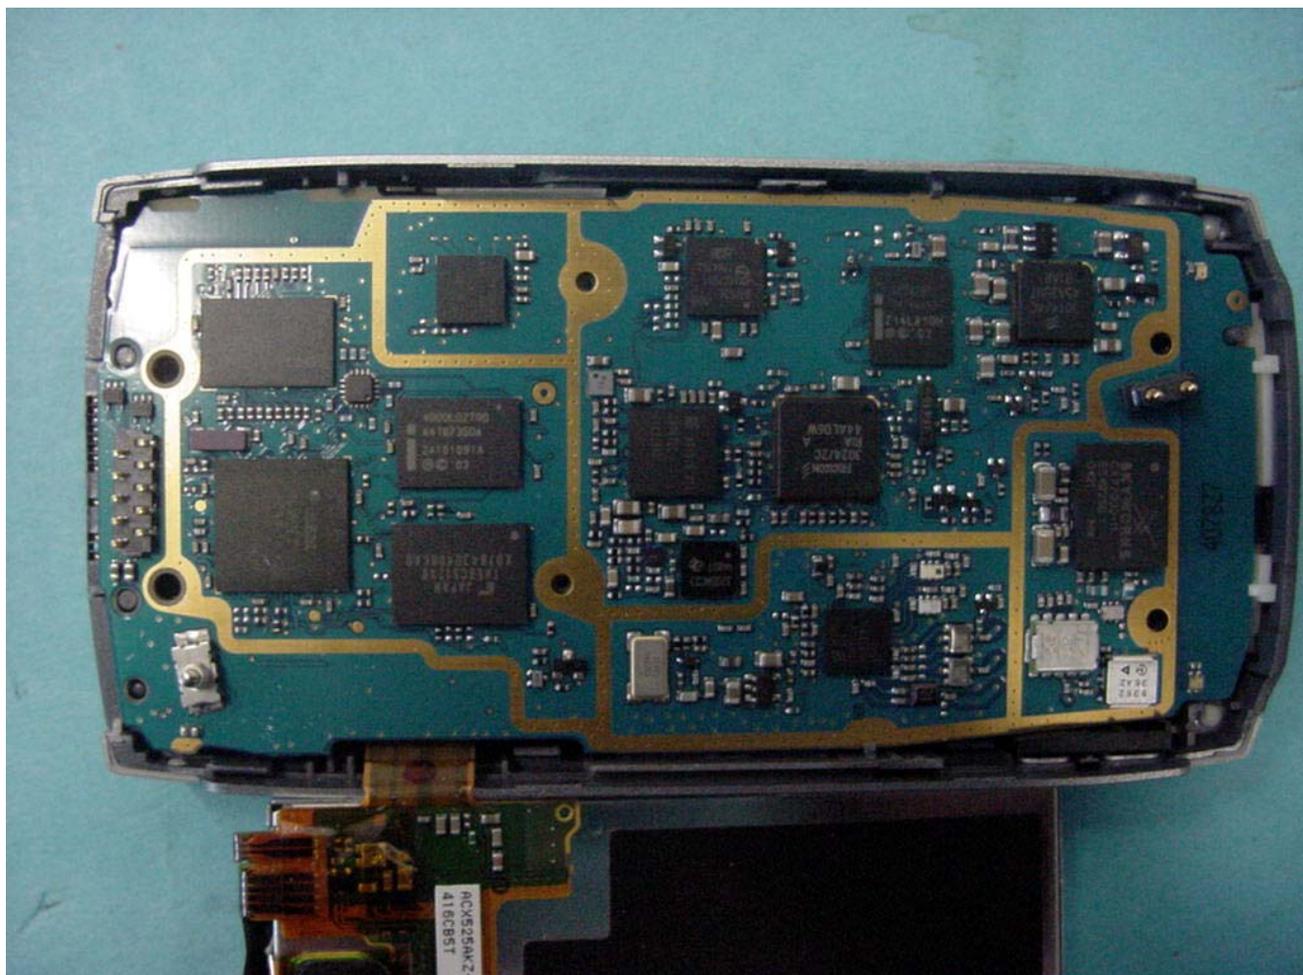

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 94 (97)




CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 95 (97)

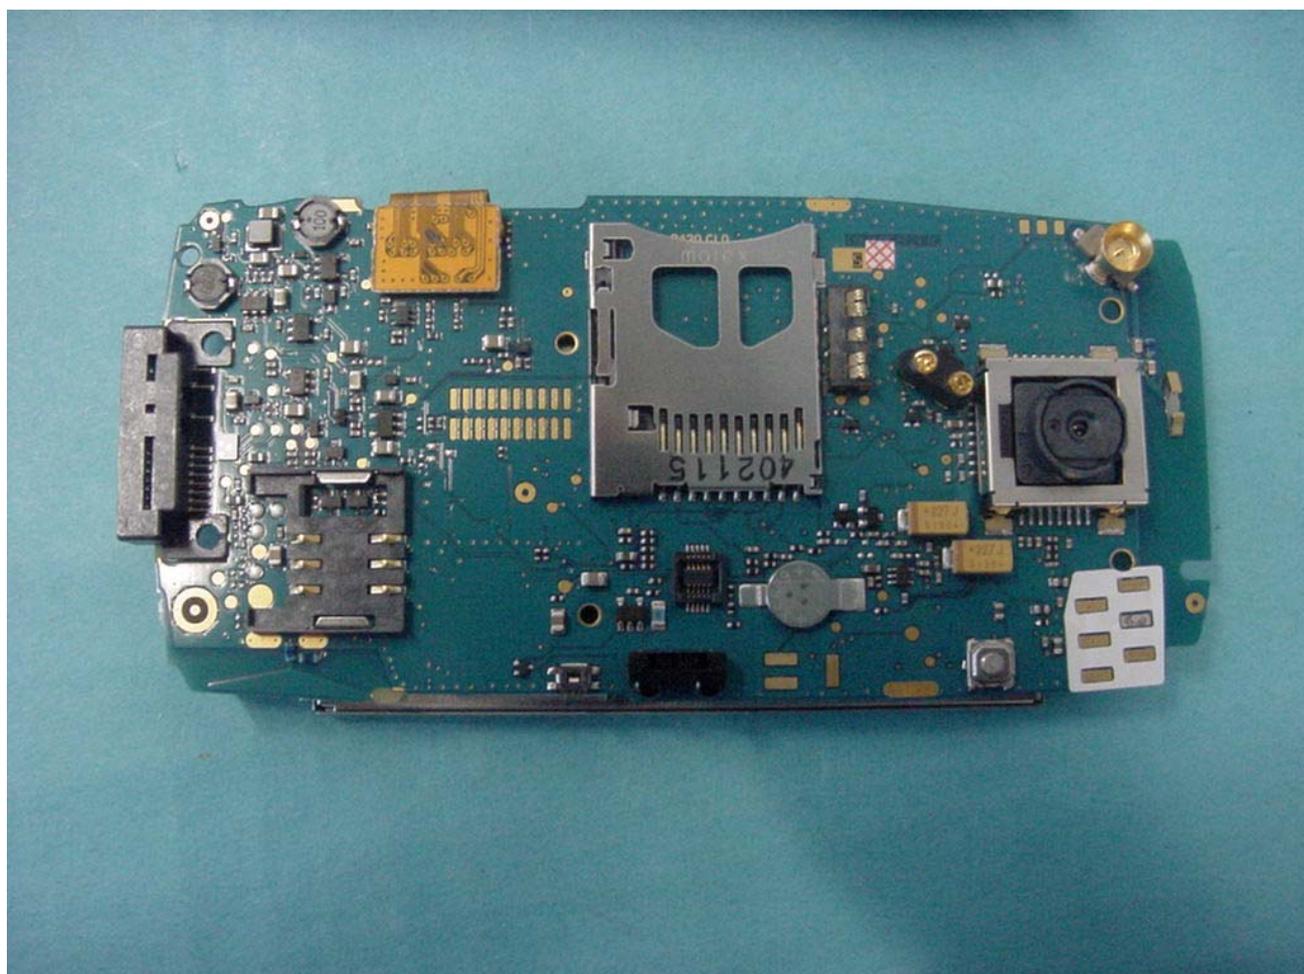


CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 96 (97)

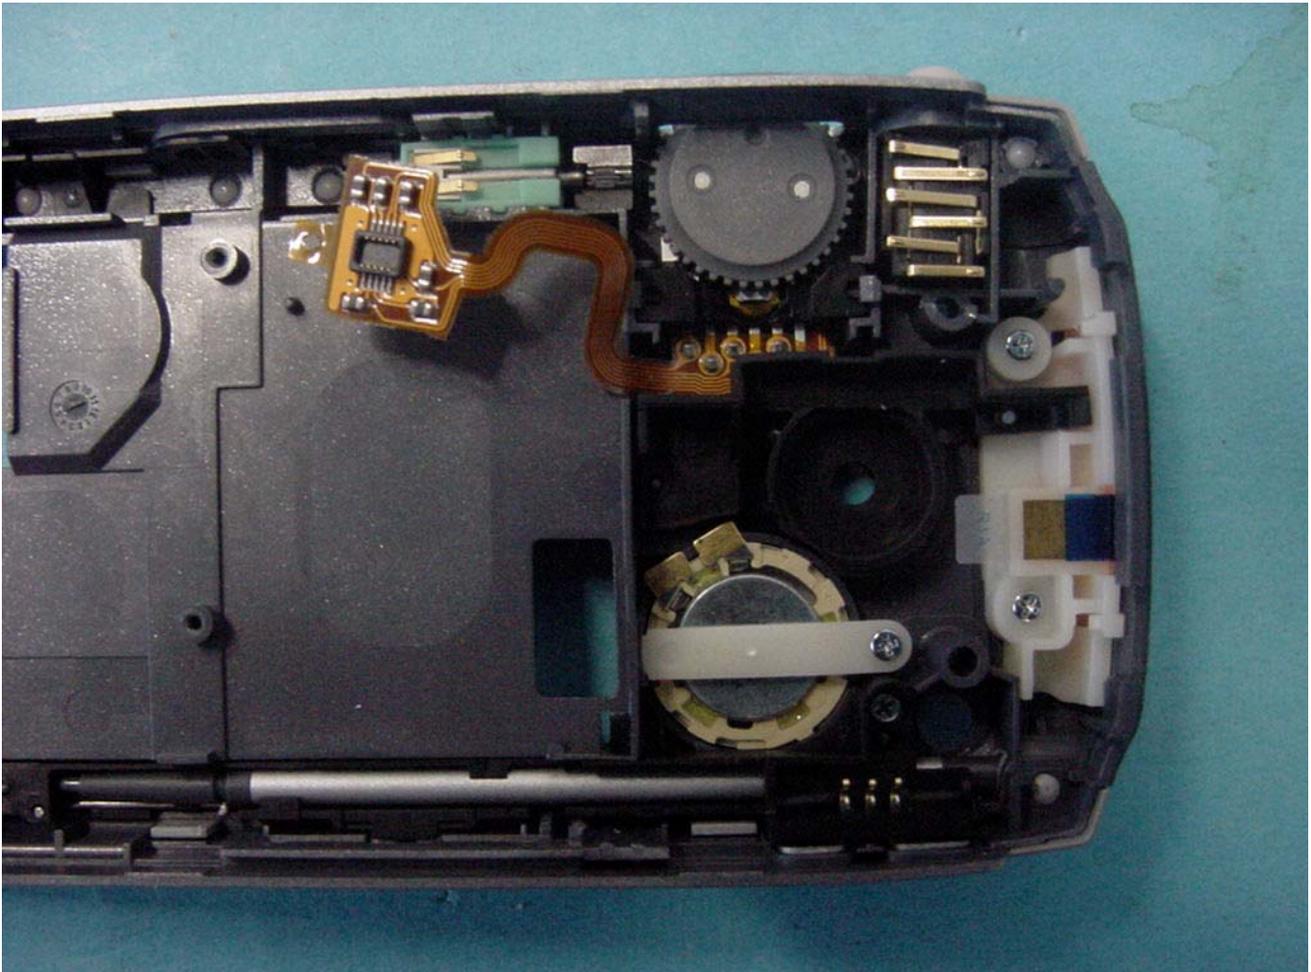

CETECOM ICT Services GmbH

Test report No.: 2-3623-01-02/04

Date: 2004-07-01

Page 97 (97)

