


Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHZ	

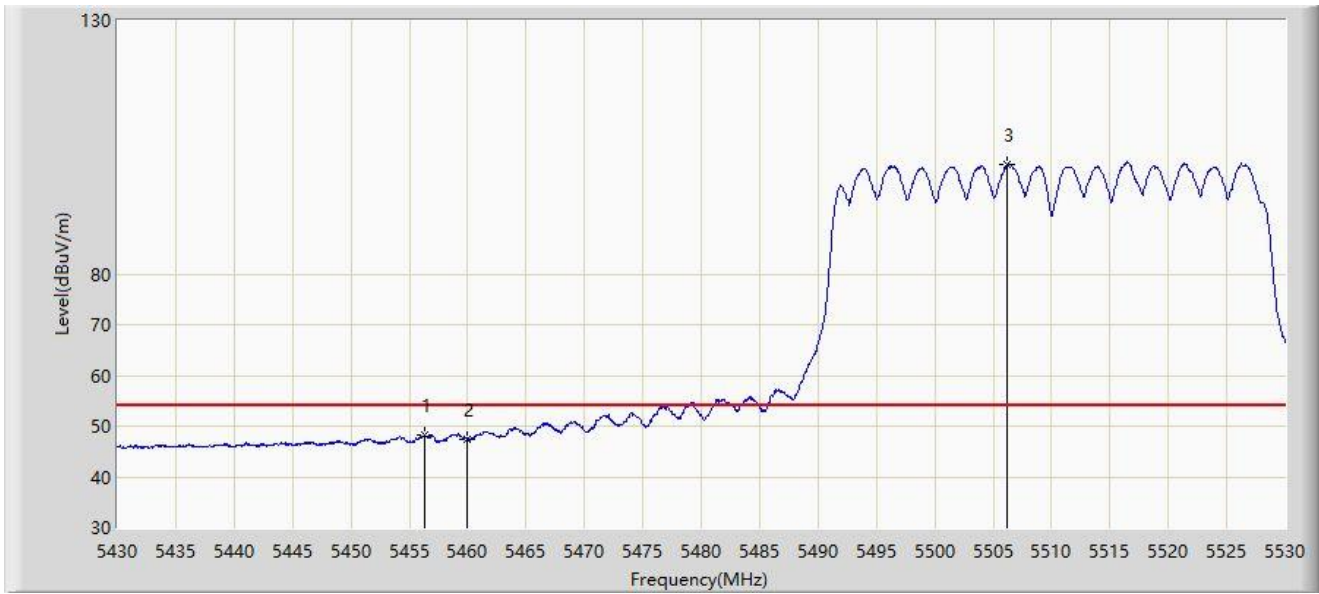


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.350	48.202	44.661	-5.798	54.000	3.541	AV
2		5460.000	47.253	43.643	-6.747	54.000	3.610	AV
3		5506.250	101.667	98.124	N/A	N/A	3.543	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHZ	

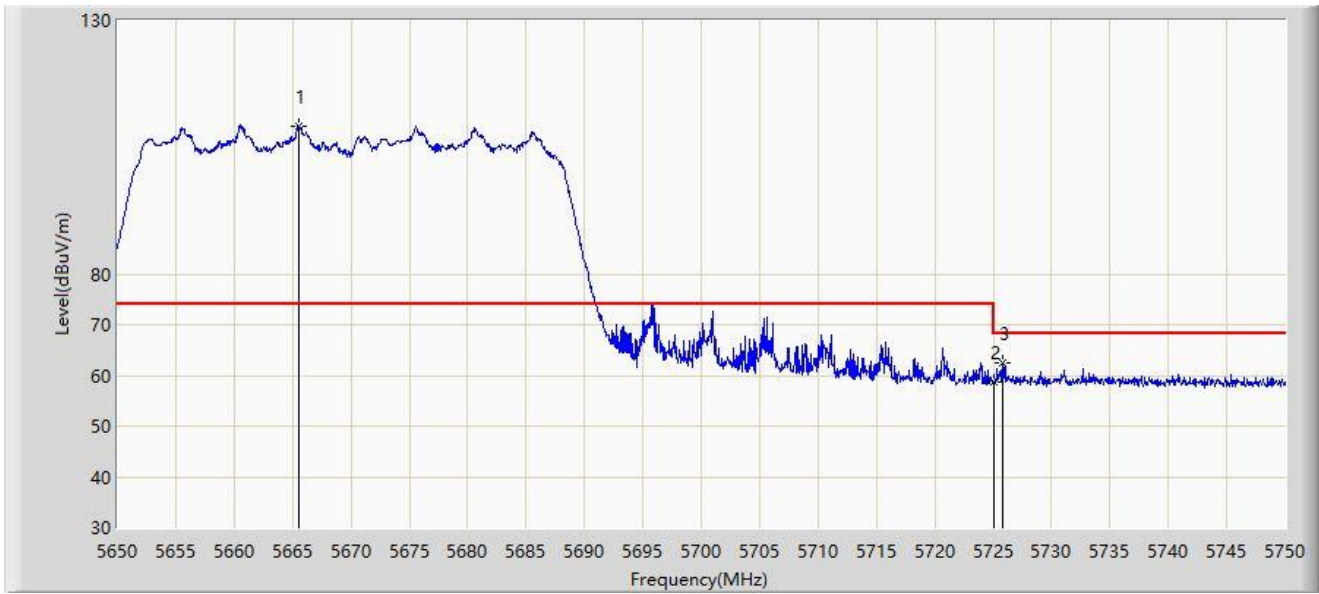


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5665.600	109.219	104.788	N/A	N/A	4.432	PK
2		5725.000	58.650	53.516	-9.550	68.200	5.134	PK
3	*	5725.850	62.477	57.335	-5.723	68.200	5.142	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHZ	

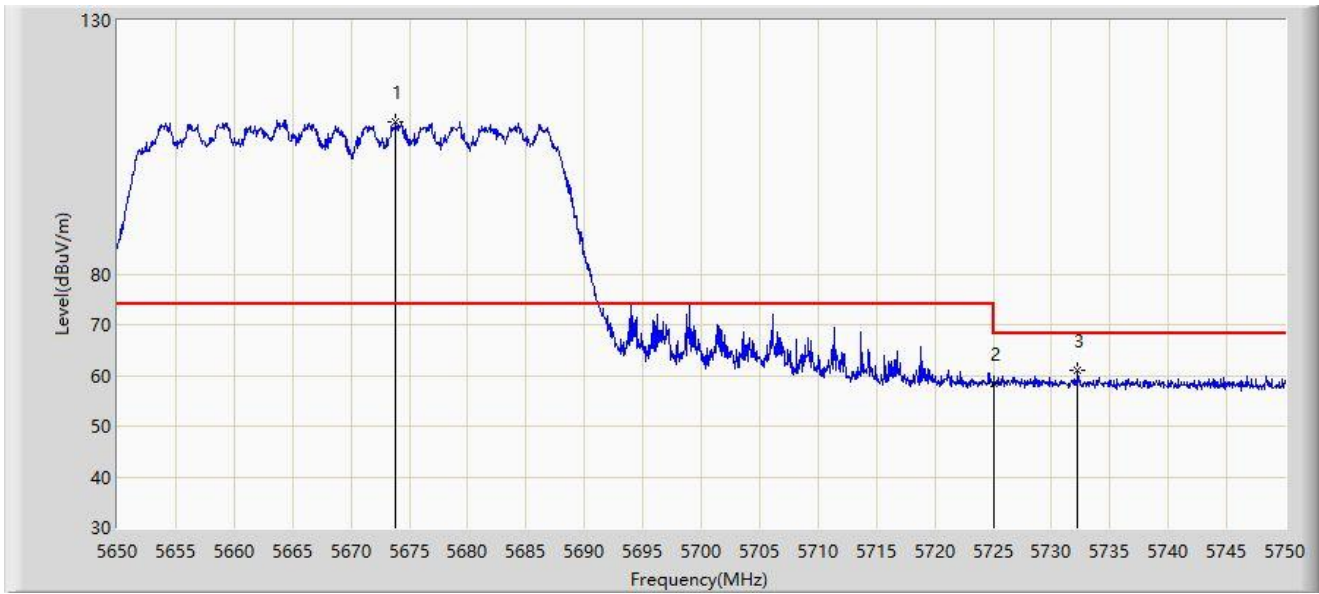


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5673.850	110.106	105.673	N/A	N/A	4.433	PK
2		5725.000	58.435	53.301	-9.765	68.200	5.134	PK
3	*	5732.200	60.970	55.894	-7.230	68.200	5.075	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

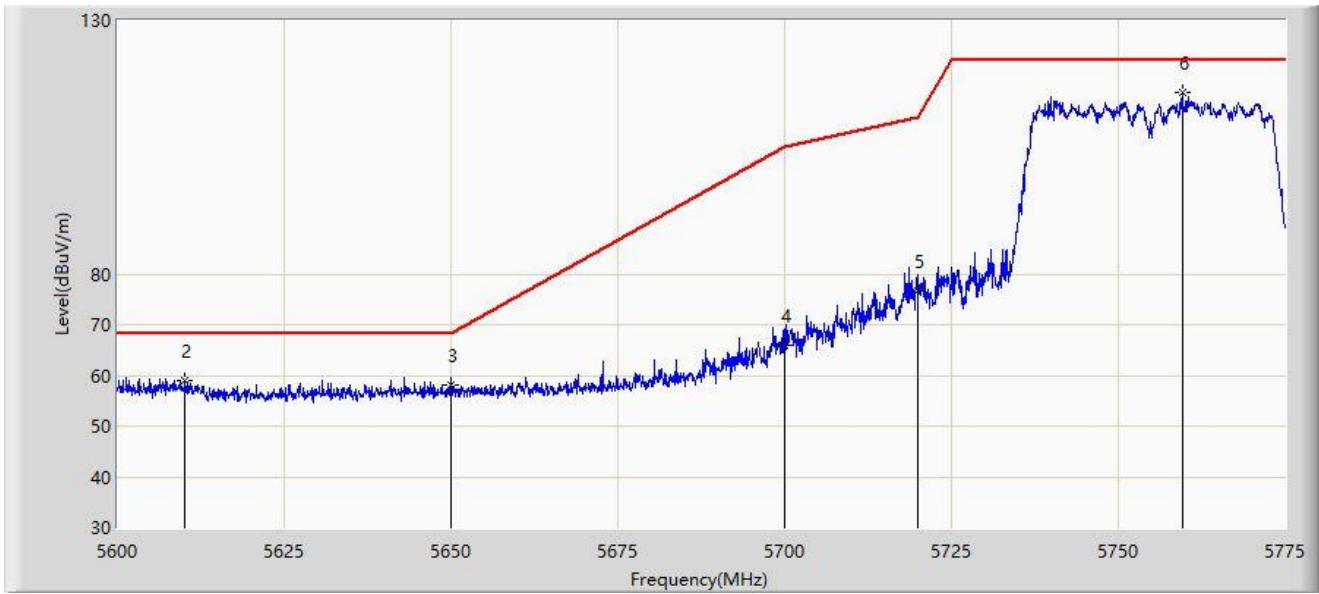


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		725.000	57.045	64.959	NaN	NaN	-7.914	PK
2	*	5610.150	59.054	55.434	-9.146	68.200	3.621	PK
3		5650.000	58.115	53.992	-10.085	68.200	4.122	PK
4		5700.000	66.035	61.598	-39.165	105.200	4.437	PK
5		5720.000	76.749	72.085	-34.051	110.800	4.663	PK
6		5759.600	115.748	111.154	N/A	N/A	4.593	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

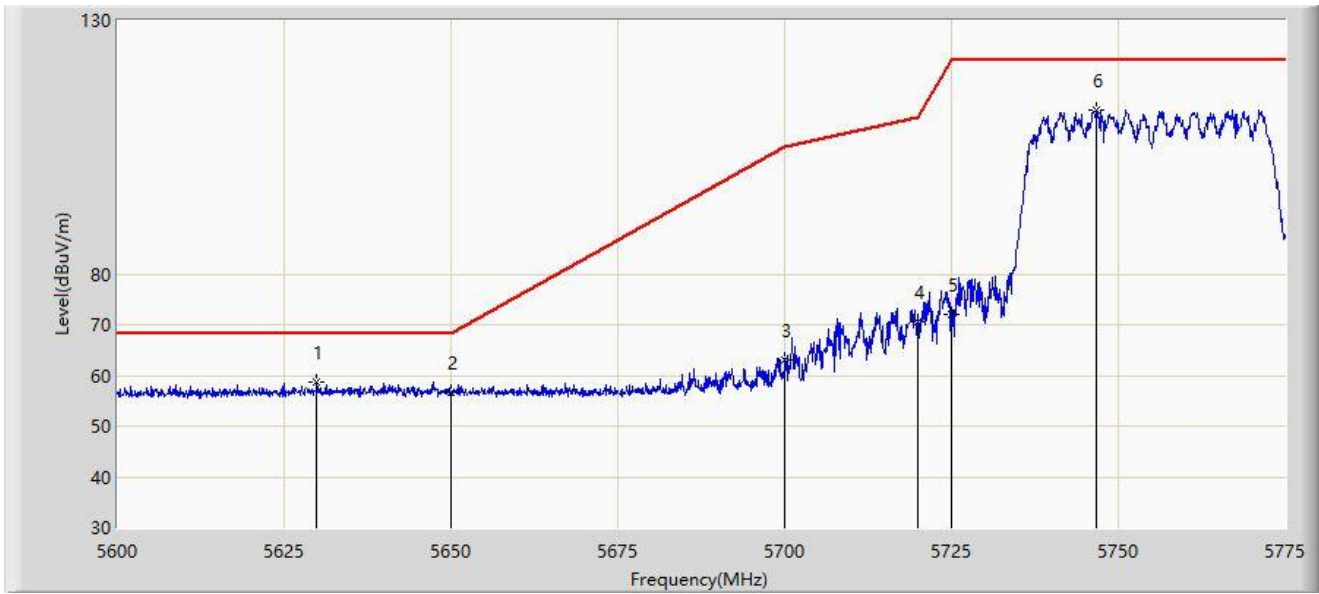


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5629.925	58.657	54.629	-9.543	68.200	4.028	PK
2		5650.000	56.546	52.423	-11.654	68.200	4.122	PK
3		5700.000	63.021	58.584	-42.179	105.200	4.437	PK
4		5720.000	70.516	65.852	-40.284	110.800	4.663	PK
5		5725.000	72.128	67.425	-50.072	122.200	4.703	PK
6		5746.737	112.358	107.916	N/A	N/A	4.441	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

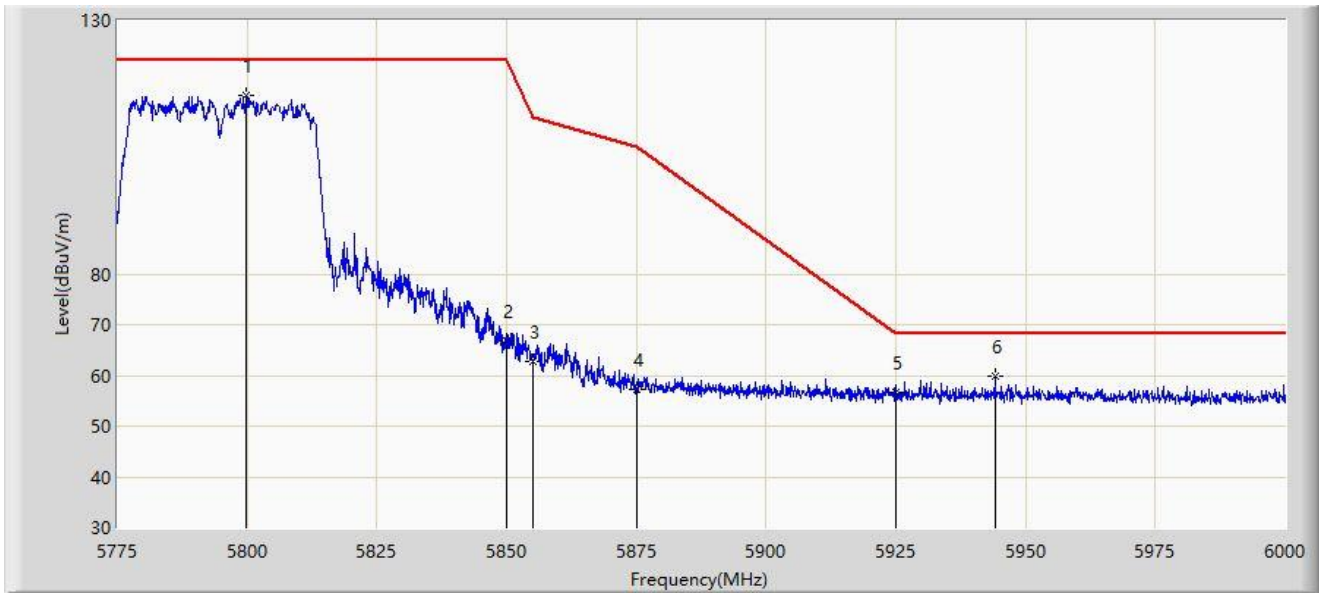


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5799.750	115.278	110.209	N/A	N/A	5.070	PK
2		5850.000	66.848	61.865	-55.352	122.200	4.984	PK
3		5855.000	62.722	57.684	-48.078	110.800	5.038	PK
4		5875.000	57.348	52.217	-47.852	105.200	5.131	PK
5		5925.000	56.670	51.435	-11.530	68.200	5.236	PK
6	*	5944.087	59.828	54.514	-8.372	68.200	5.314	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

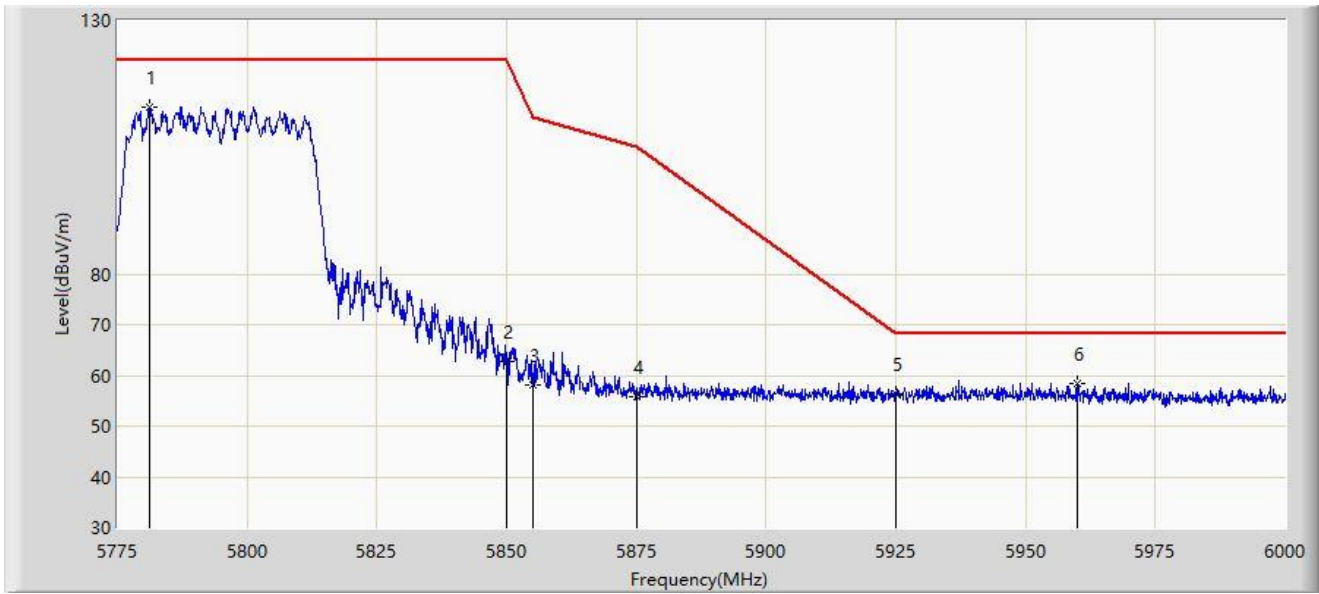


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5781.187	113.003	108.080	N/A	N/A	4.923	PK
2		5850.000	62.820	57.837	-59.380	122.200	4.984	PK
3		5855.000	58.139	53.101	-52.661	110.800	5.038	PK
4		5875.000	55.778	50.647	-49.422	105.200	5.131	PK
5		5925.000	56.405	51.170	-11.795	68.200	5.236	PK
6	*	5959.837	58.526	53.133	-9.674	68.200	5.393	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

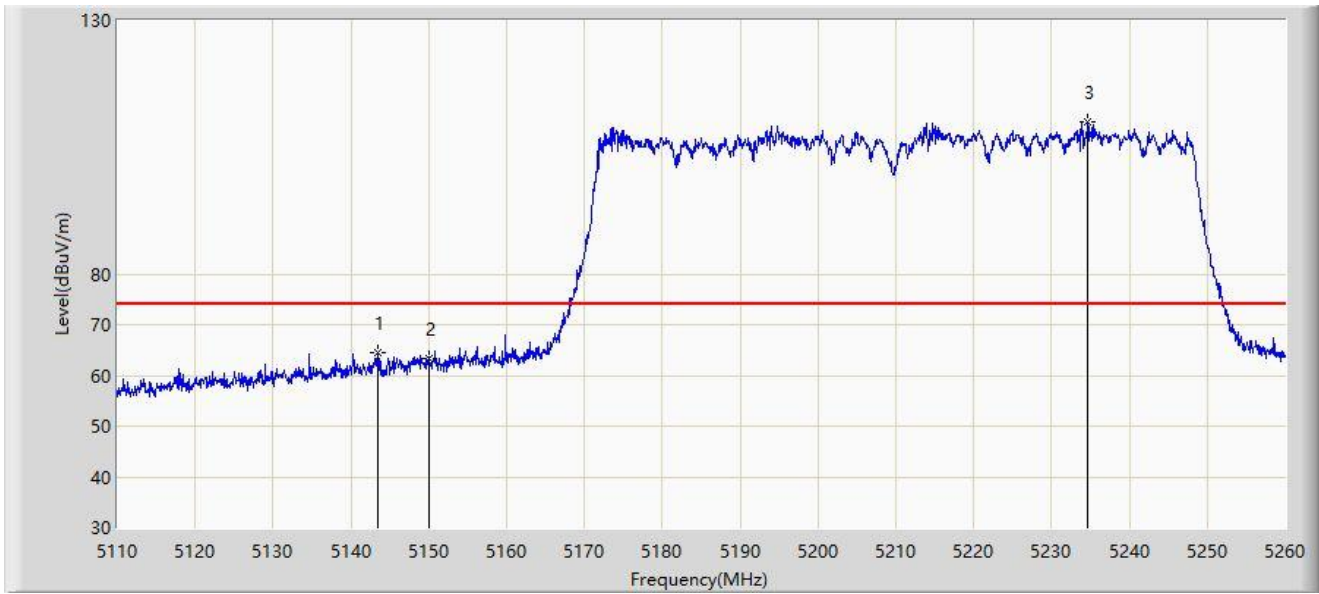


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5143.375	64.610	61.193	-9.390	74.000	3.417	PK
2		5150.000	63.388	59.906	-10.612	74.000	3.482	PK
3		5234.650	109.921	106.693	N/A	N/A	3.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

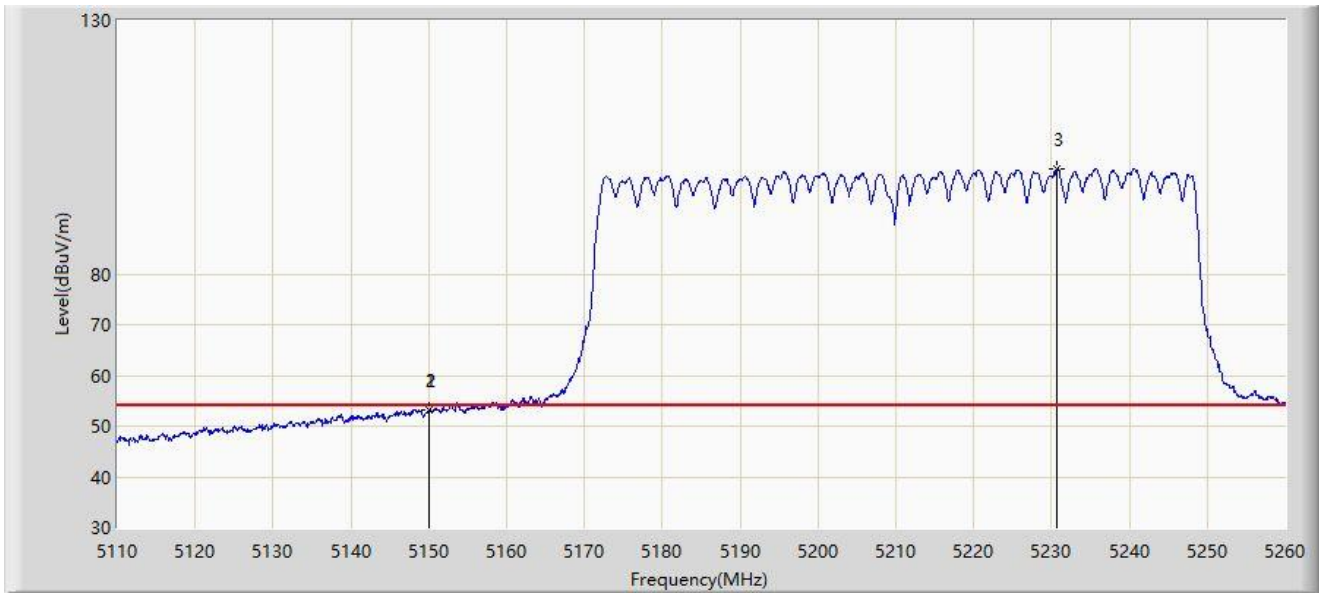


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.975	53.308	49.827	-0.692	54.000	3.482	AV
2		5150.000	53.250	49.768	-0.750	54.000	3.482	AV
3		5230.750	100.668	97.481	N/A	N/A	3.187	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

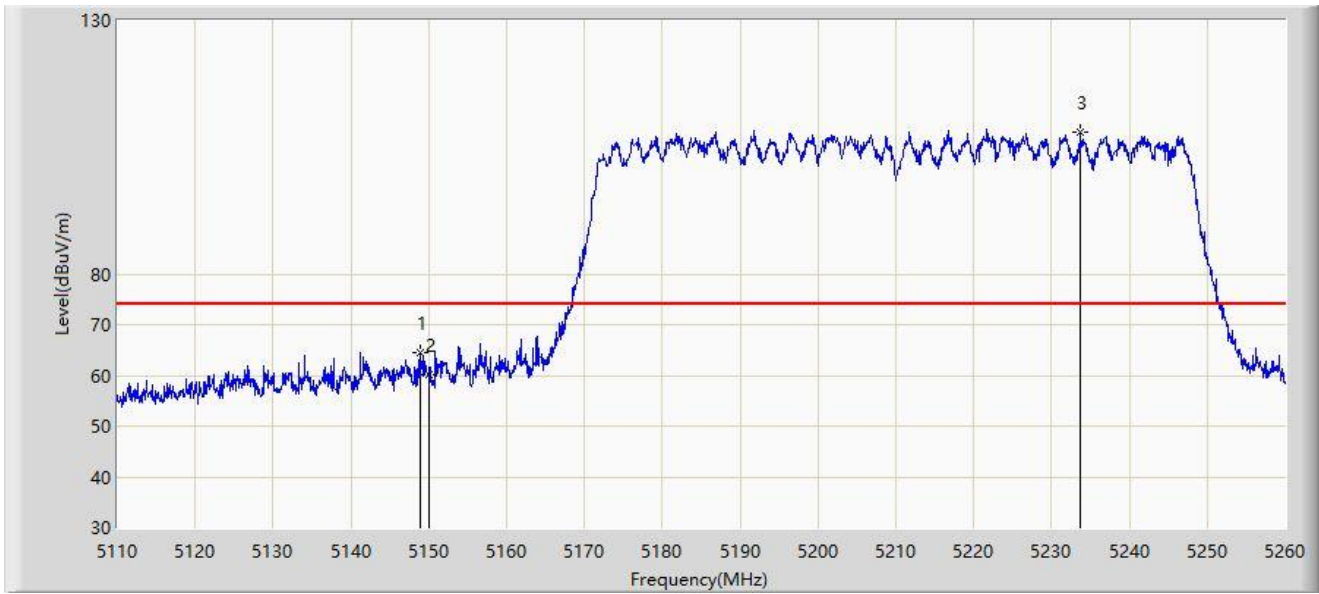


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.850	64.365	60.887	-9.635	74.000	3.478	PK
2		5150.000	60.269	56.787	-13.731	74.000	3.482	PK
3		5233.750	107.946	104.715	N/A	N/A	3.231	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

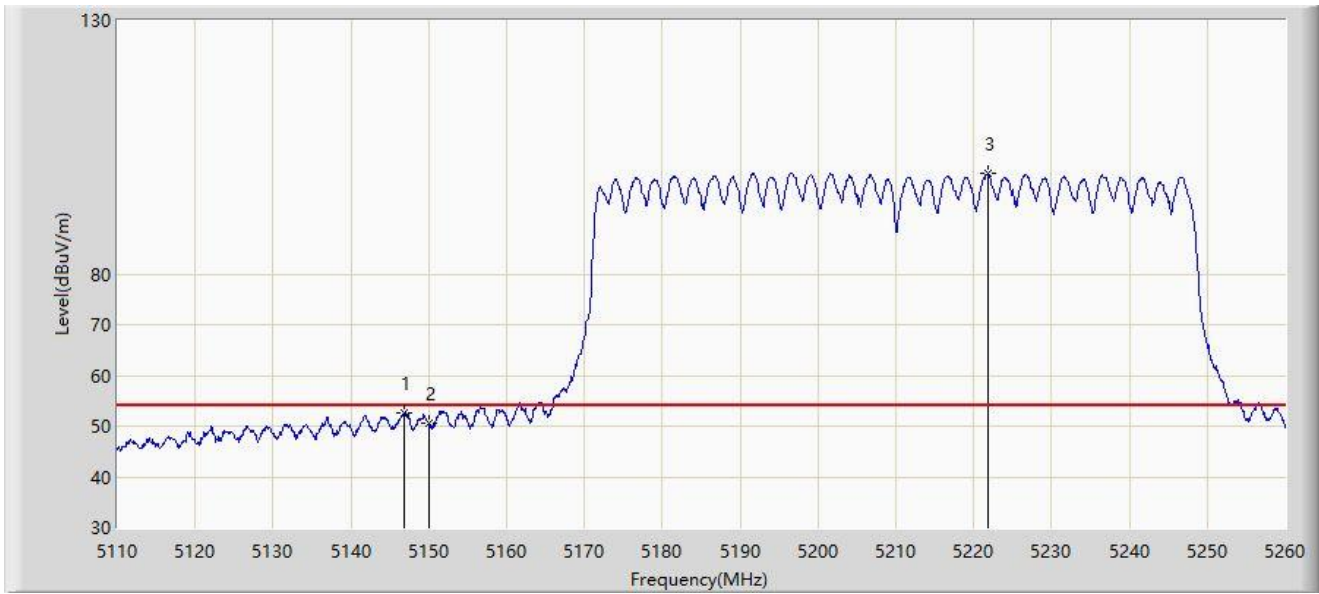


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.900	52.583	49.121	-1.417	54.000	3.461	AV
2		5150.000	50.498	47.016	-3.502	54.000	3.482	AV
3		5221.750	99.781	96.770	N/A	N/A	3.012	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHZ	

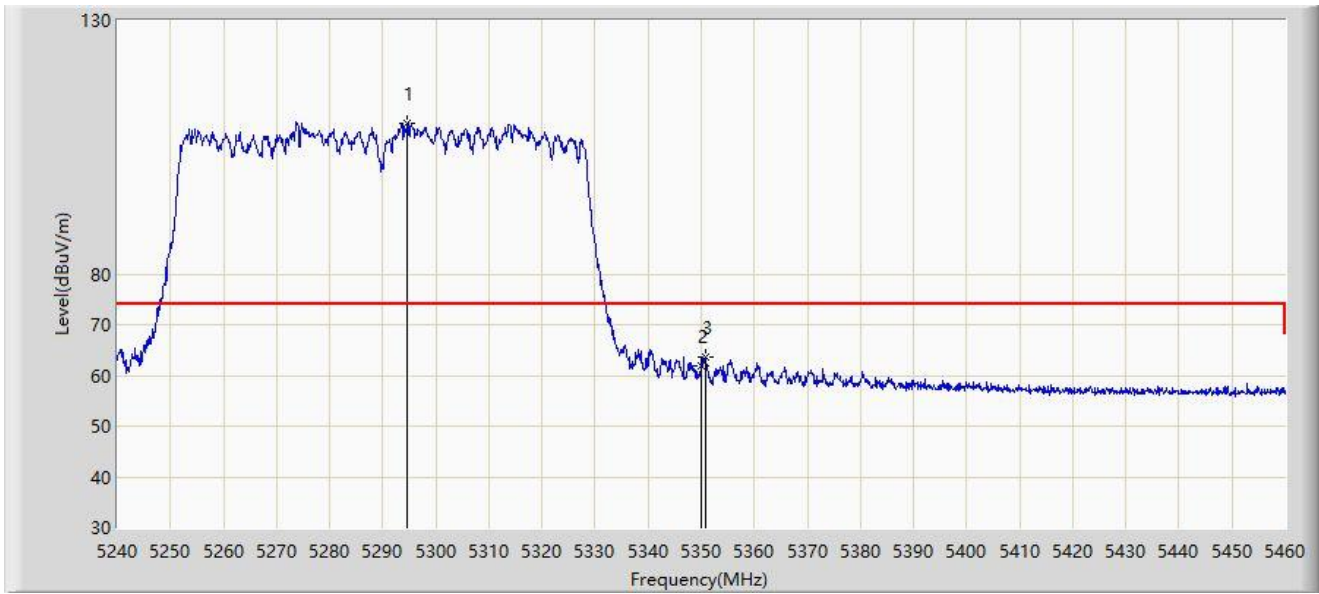


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5294.670	109.725	106.479	N/A	N/A	3.246	PK
2		5350.000	61.891	58.568	-12.109	74.000	3.323	PK
3	*	5350.880	63.499	60.199	-10.501	74.000	3.300	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHZ	

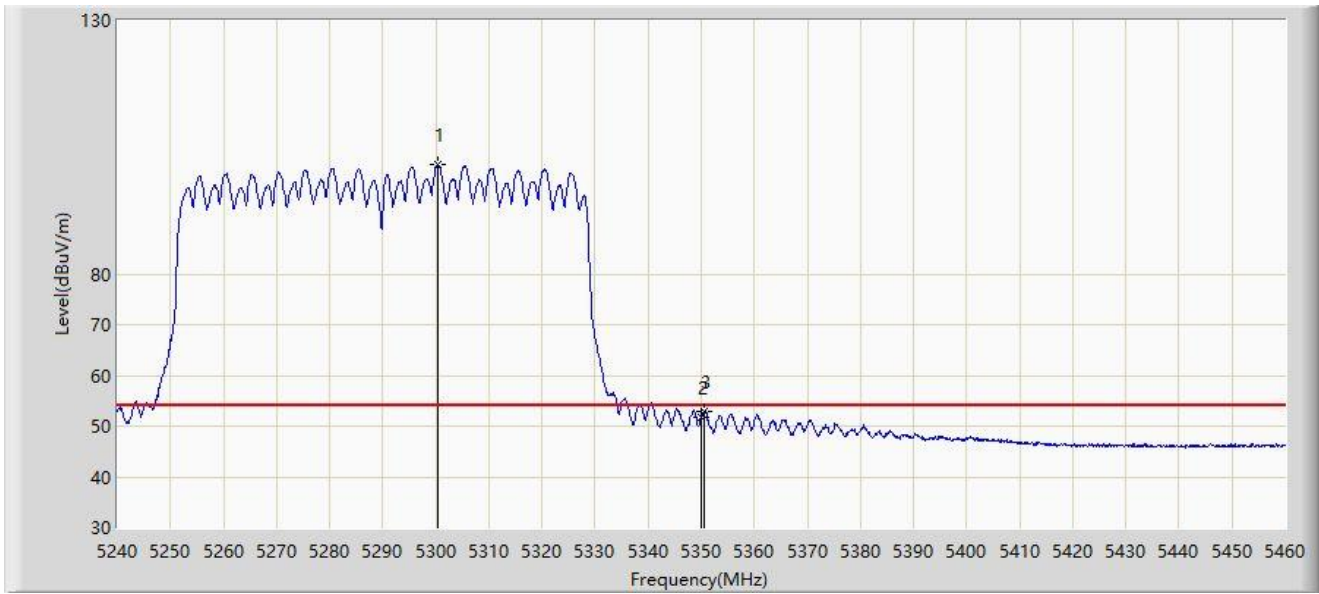


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5300.280	101.494	98.163	N/A	N/A	3.331	AV
2		5350.000	51.782	48.459	-2.218	54.000	3.323	AV
3	*	5350.660	52.875	49.569	-1.125	54.000	3.306	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHZ	

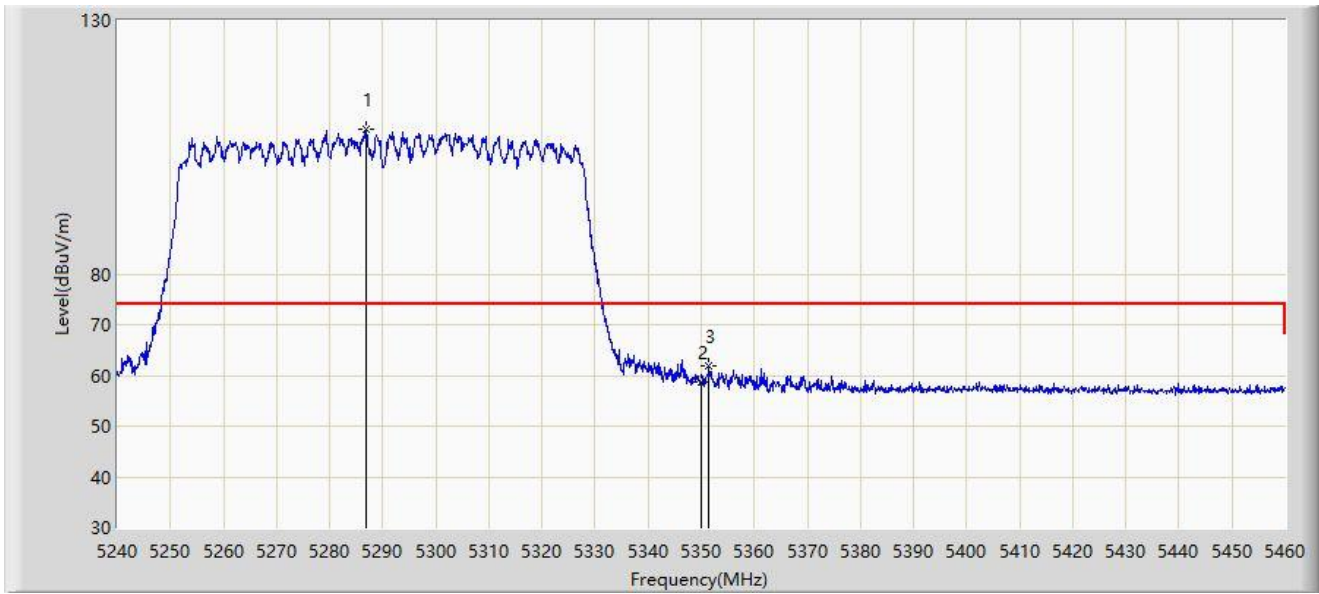


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5286.750	108.548	105.445	N/A	N/A	3.103	PK
2		5350.000	58.814	55.491	-15.186	74.000	3.323	PK
3	*	5351.430	61.883	58.597	-12.117	74.000	3.287	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHZ	

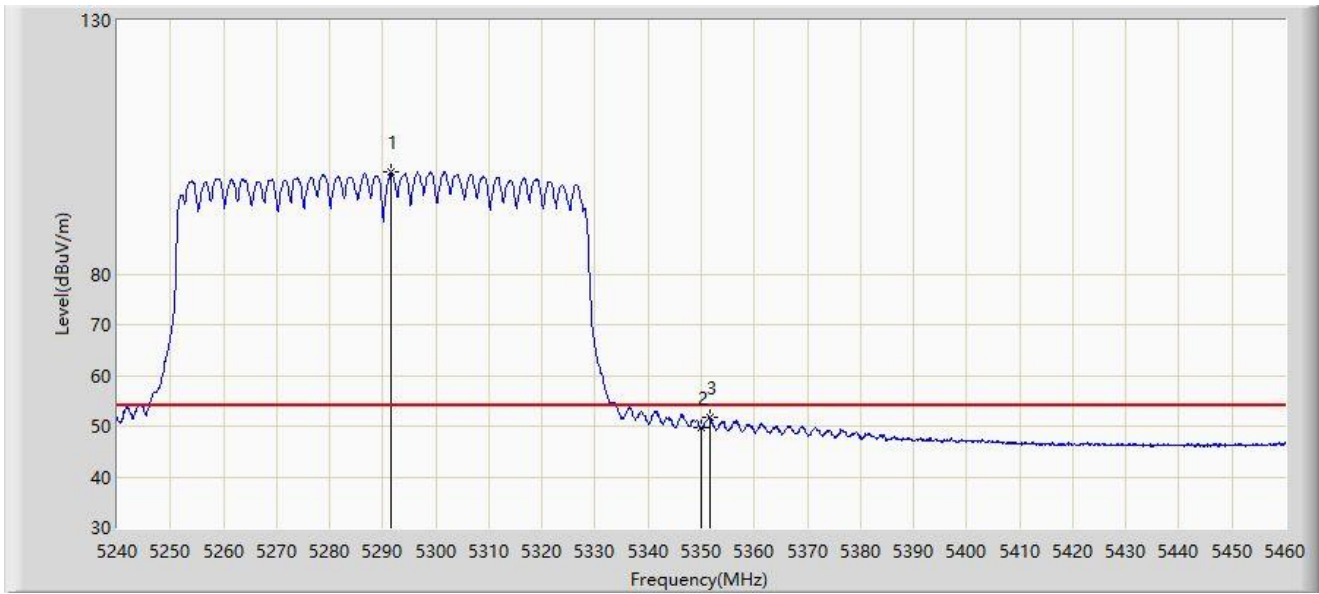


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5291.590	100.031	96.841	N/A	N/A	3.191	AV
2		5350.000	49.642	46.319	-4.358	54.000	3.323	AV
3	*	5351.760	51.735	48.457	-2.265	54.000	3.278	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHZ	

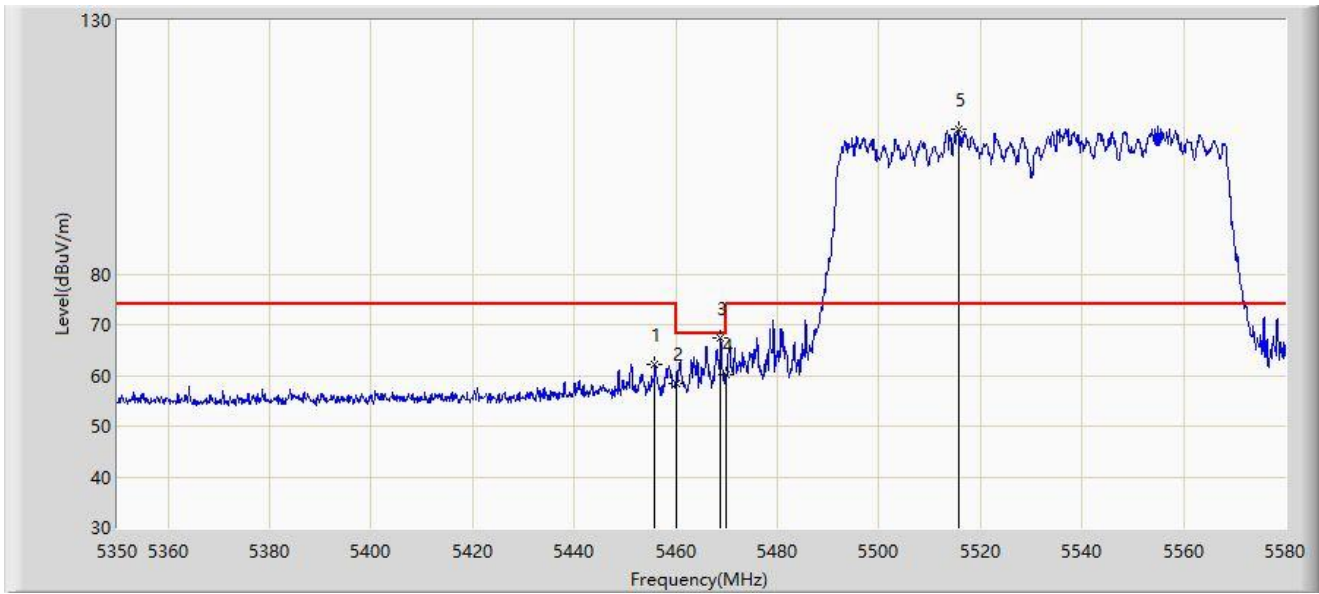


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5455.915	62.291	58.759	-11.709	74.000	3.532	PK
2		5460.000	58.358	54.748	-15.642	74.000	3.610	PK
3	*	5468.795	67.249	63.474	-0.951	68.200	3.775	PK
4		5470.000	60.198	56.400	-8.002	68.200	3.797	PK
5		5515.715	108.433	104.995	N/A	N/A	3.438	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHZ	

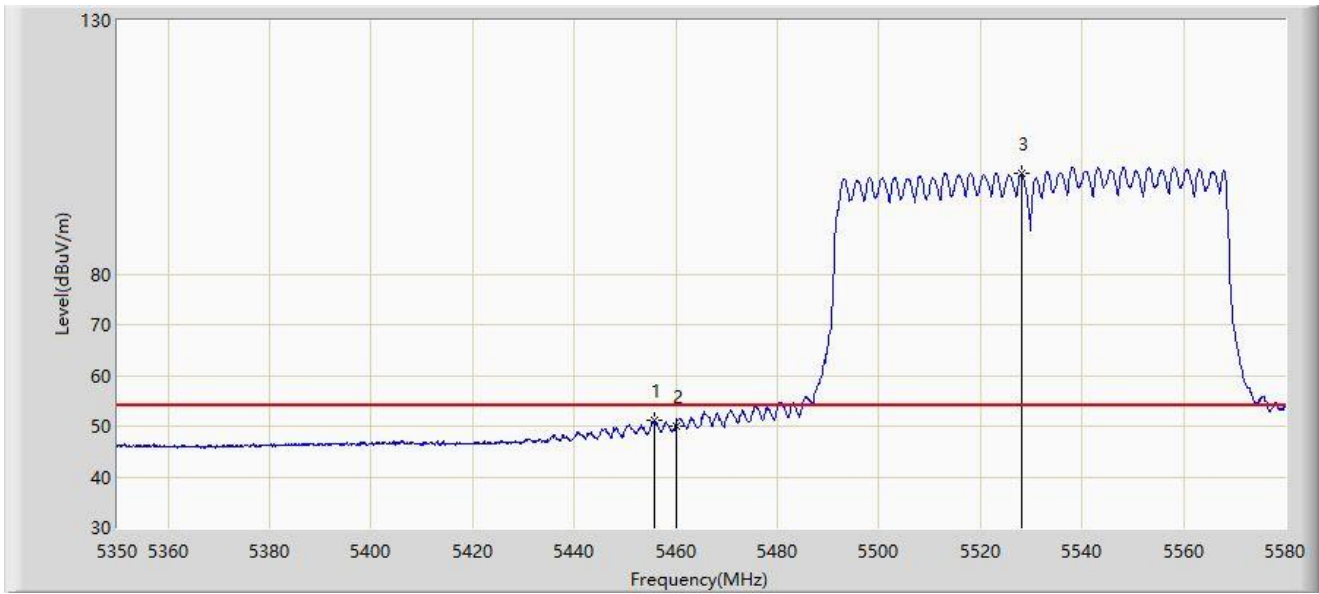


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5455.915	51.031	47.499	-2.969	54.000	3.532	AV
2		5460.000	49.992	46.382	-4.008	54.000	3.610	AV
3		5528.135	99.747	96.233	N/A	N/A	3.513	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHZ	

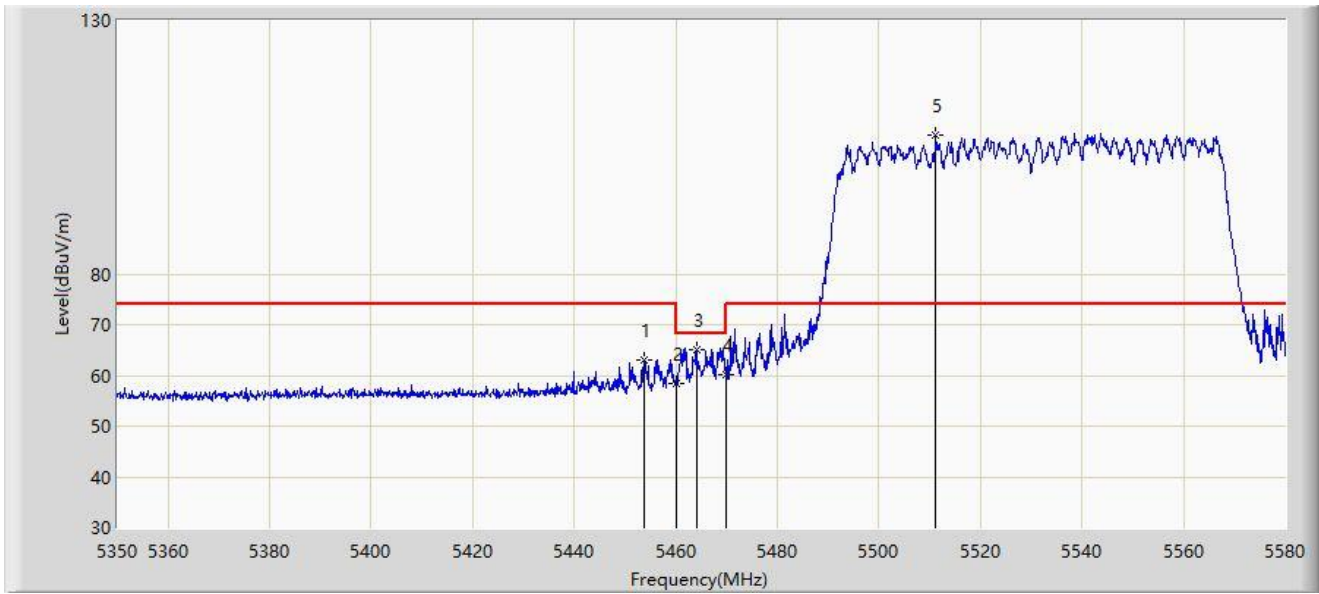


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.845	63.090	59.596	-10.910	74.000	3.494	PK
2		5460.000	58.458	54.848	-15.542	74.000	3.610	PK
3	*	5464.080	65.002	61.315	-3.198	68.200	3.687	PK
4		5470.000	60.193	56.395	-8.007	68.200	3.797	PK
5		5511.230	107.516	104.046	N/A	N/A	3.469	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHZ	

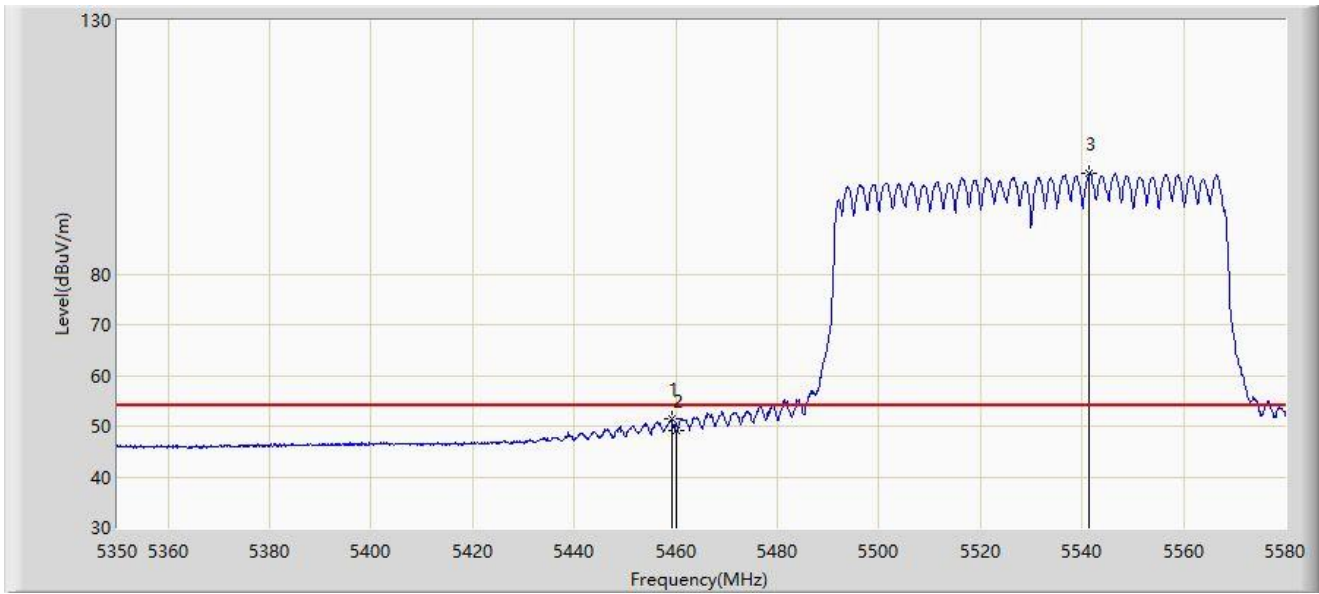


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.250	51.365	47.769	-2.635	54.000	3.597	AV
2		5460.000	49.000	45.390	-5.000	54.000	3.610	AV
3		5541.475	99.769	95.969	N/A	N/A	3.800	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHZ	

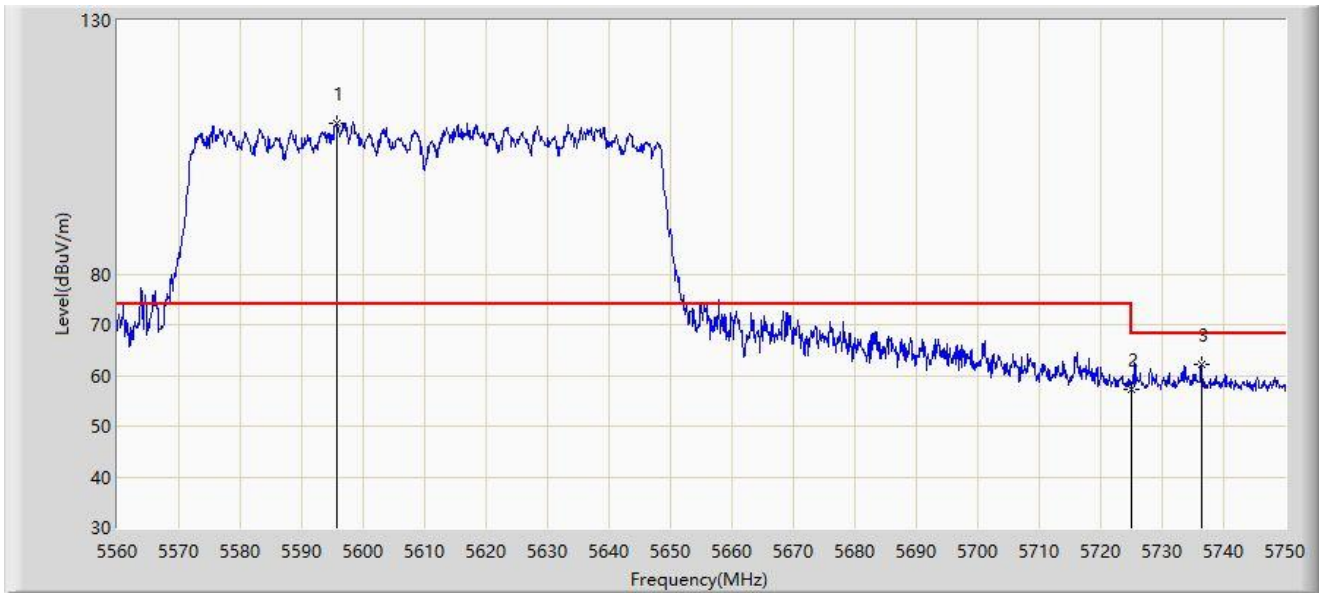


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5595.625	109.822	105.906	N/A	N/A	3.916	PK
2		5725.000	57.177	52.043	-11.023	68.200	5.134	PK
3	*	5736.320	62.318	57.287	-5.882	68.200	5.031	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHZ	

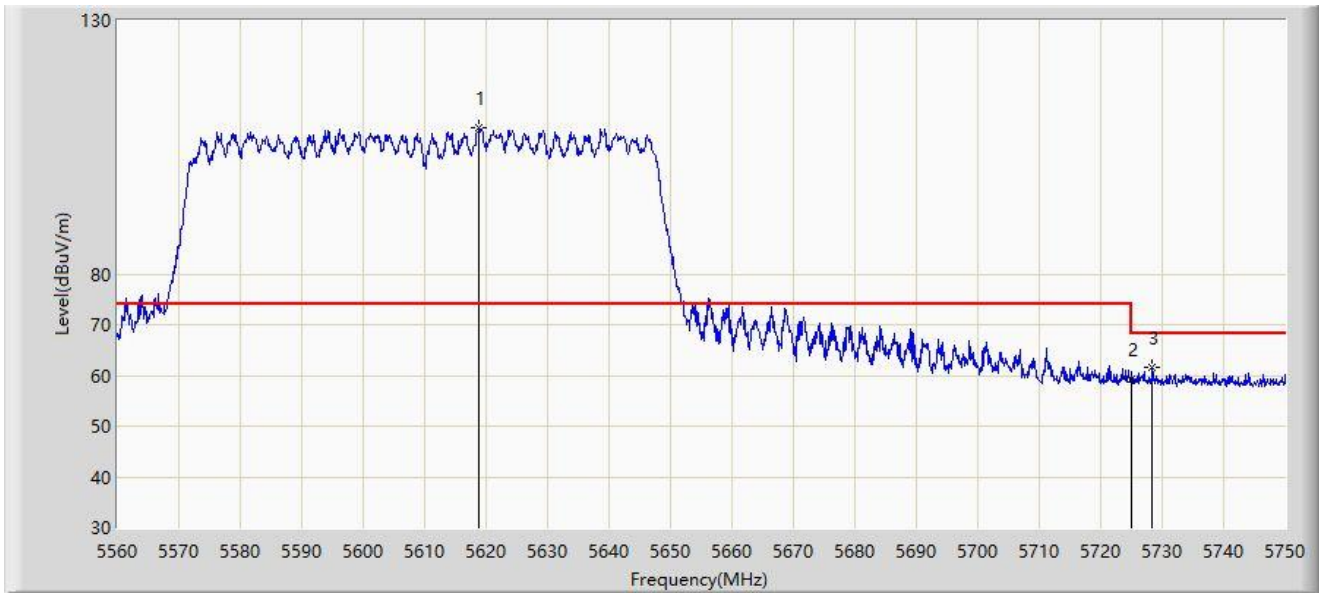


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5618.900	108.811	104.517	N/A	N/A	4.294	PK
2		5725.000	59.219	54.085	-8.981	68.200	5.134	PK
3	*	5728.435	61.577	56.460	-6.623	68.200	5.117	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

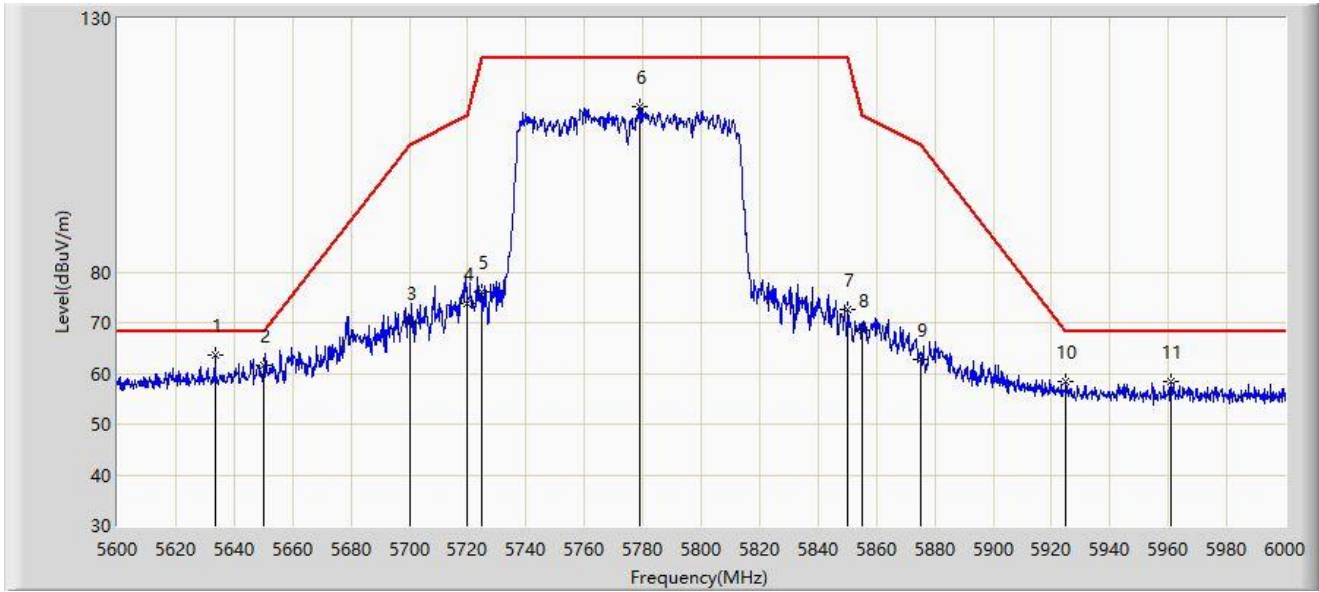


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5633.400	63.727	59.657	-4.473	68.200	4.070	PK
2		5650.000	61.593	57.470	-6.607	68.200	4.122	PK
3		5700.000	70.027	65.590	-35.173	105.200	4.437	PK
4		5720.000	73.744	69.080	-37.056	110.800	4.663	PK
5		5725.000	76.067	71.364	-46.133	122.200	4.703	PK
6		5778.800	112.663	107.763	N/A	N/A	4.900	PK
7		5850.000	72.533	67.550	-49.667	122.200	4.984	PK
8		5855.000	68.410	63.372	-42.390	110.800	5.038	PK
9		5875.000	62.839	57.708	-42.361	105.200	5.131	PK
10		5925.000	58.398	53.163	-9.802	68.200	5.236	PK
11		5961.000	58.304	52.918	-9.896	68.200	5.385	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

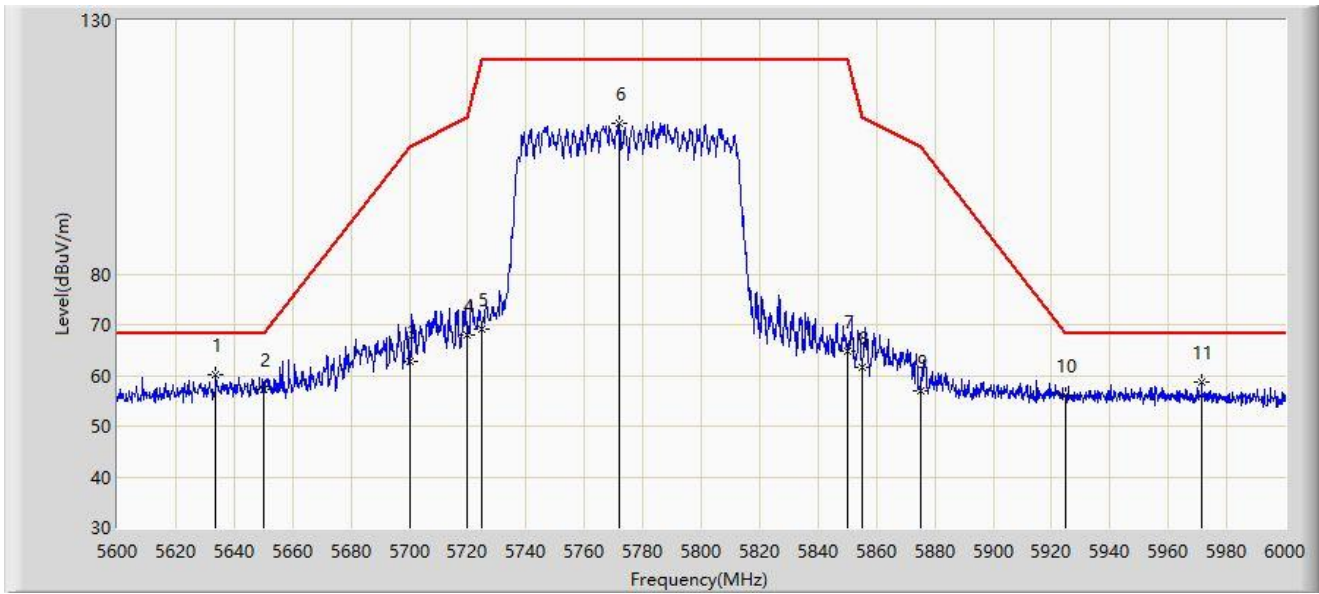


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5633.600	60.181	56.109	-8.019	68.200	4.072	PK
2		5650.000	57.146	53.023	-11.054	68.200	4.122	PK
3		5700.000	62.816	58.379	-42.384	105.200	4.437	PK
4		5720.000	68.101	63.437	-42.699	110.800	4.663	PK
5		5725.000	69.077	64.374	-53.123	122.200	4.703	PK
6		5772.000	109.815	105.009	N/A	N/A	4.806	PK
7		5850.000	64.742	59.759	-57.458	122.200	4.984	PK
8		5855.000	61.688	56.650	-49.112	110.800	5.038	PK
9		5875.000	57.065	51.934	-48.135	105.200	5.131	PK
10		5925.000	56.049	50.814	-12.151	68.200	5.236	PK
11		5971.400	58.778	53.483	-9.422	68.200	5.294	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

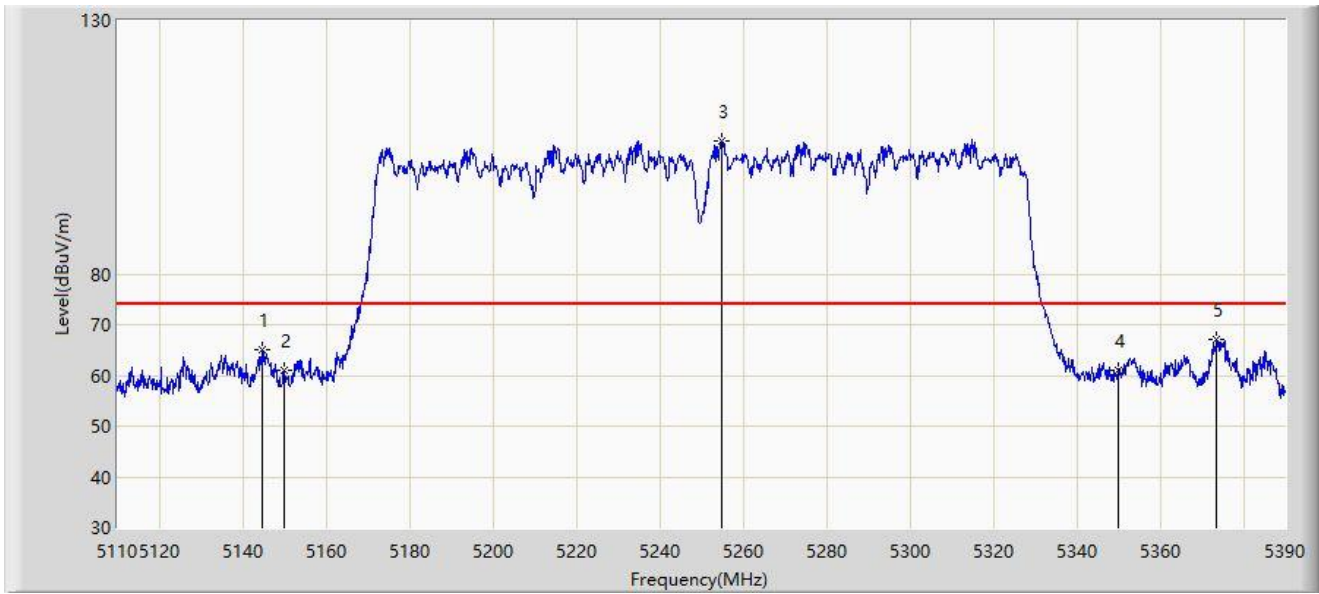


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5144.860	65.067	61.631	-8.933	74.000	3.437	PK
2		5150.000	60.882	57.400	-13.118	74.000	3.482	PK
3		5254.760	106.261	103.177	N/A	N/A	3.083	PK
4		5350.000	61.012	58.192	-12.988	74.000	2.820	PK
5	*	5373.480	67.203	64.255	-6.797	74.000	2.949	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

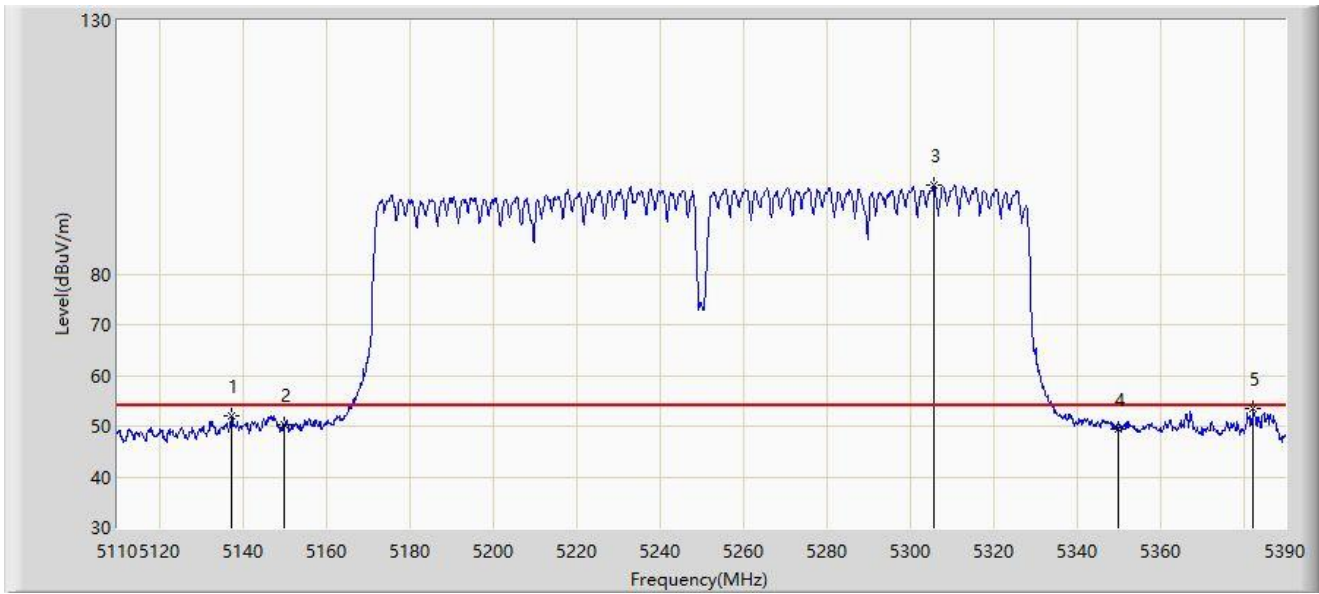


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5137.440	51.978	48.636	-2.022	54.000	3.342	AV
2		5150.000	50.350	46.868	-3.650	54.000	3.482	AV
3		5305.860	97.556	94.744	N/A	N/A	2.813	AV
4		5350.000	49.524	46.704	-4.476	54.000	2.820	AV
5	*	5382.440	53.490	50.367	-0.510	54.000	3.123	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

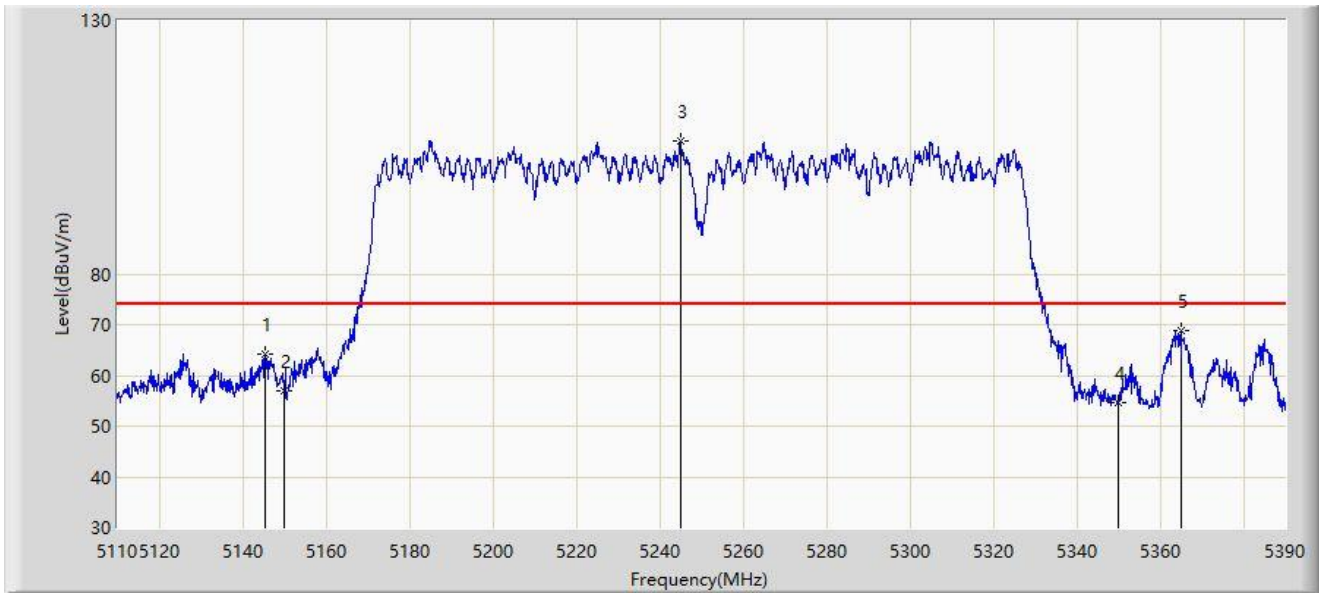


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5145.420	64.179	60.736	-9.821	74.000	3.443	PK
2		5150.000	56.929	53.447	-17.071	74.000	3.482	PK
3		5244.960	106.100	102.902	N/A	N/A	3.197	PK
4		5350.000	54.698	51.878	-19.302	74.000	2.820	PK
5	*	5365.080	68.732	65.887	-5.268	74.000	2.845	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

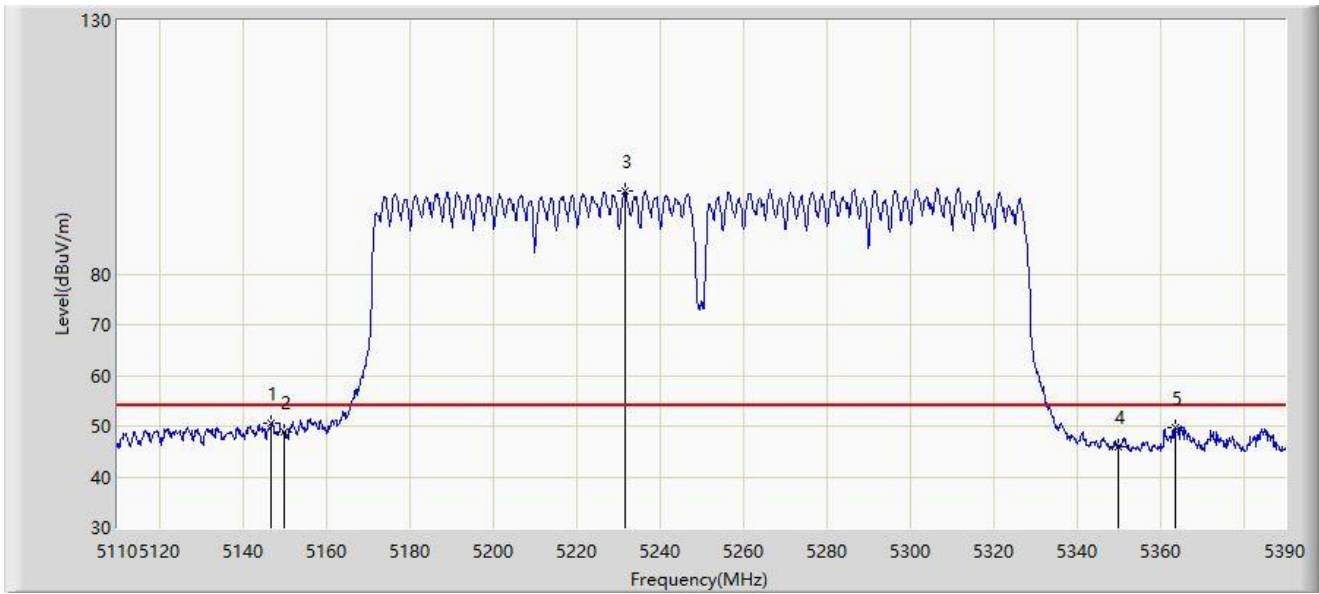


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.960	50.555	47.093	-3.445	54.000	3.462	AV
2		5150.000	48.907	45.425	-5.093	54.000	3.482	AV
3		5231.660	96.453	93.248	N/A	N/A	3.205	AV
4		5350.000	46.012	43.192	-7.988	54.000	2.820	AV
5		5363.540	49.821	46.983	-4.179	54.000	2.838	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHZ	

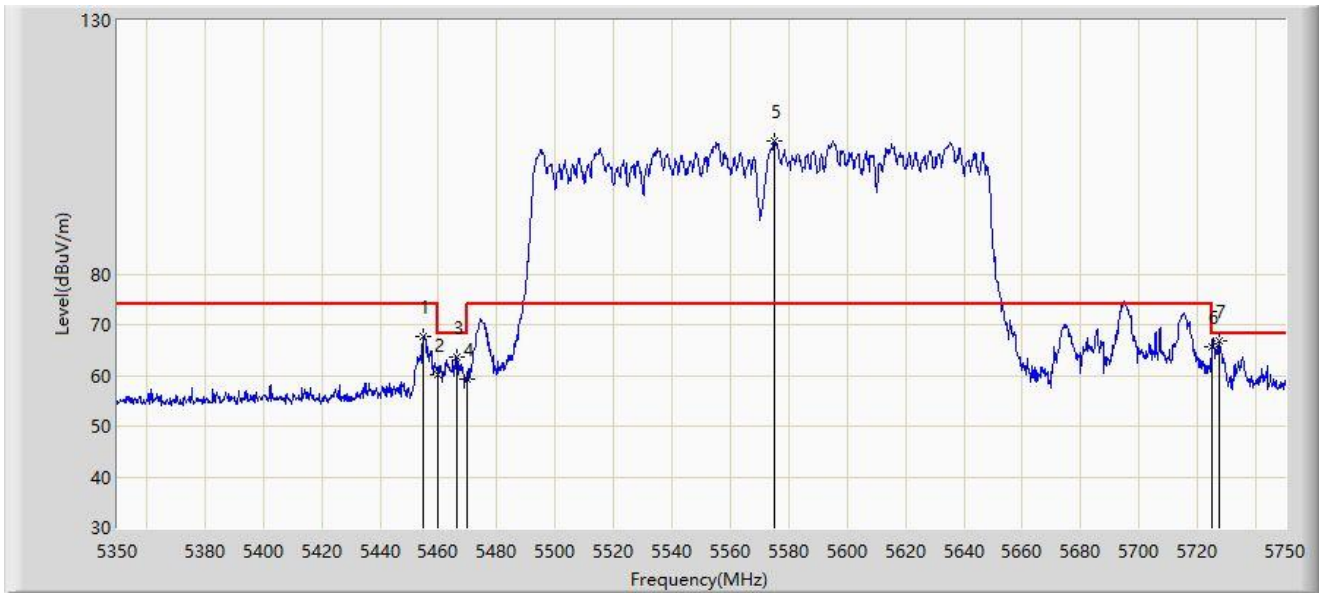


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5455.000	67.766	64.253	-6.234	74.000	3.513	PK
2		5460.000	60.197	56.587	-13.803	74.000	3.610	PK
3		5466.200	63.746	60.019	-4.454	68.200	3.726	PK
4		5470.000	59.394	55.596	-8.806	68.200	3.797	PK
5		5575.000	106.114	102.158	N/A	N/A	3.956	PK
6		5725.000	65.578	60.444	-2.622	68.200	5.134	PK
7	*	5727.600	66.800	61.674	-1.400	68.200	5.126	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHZ	

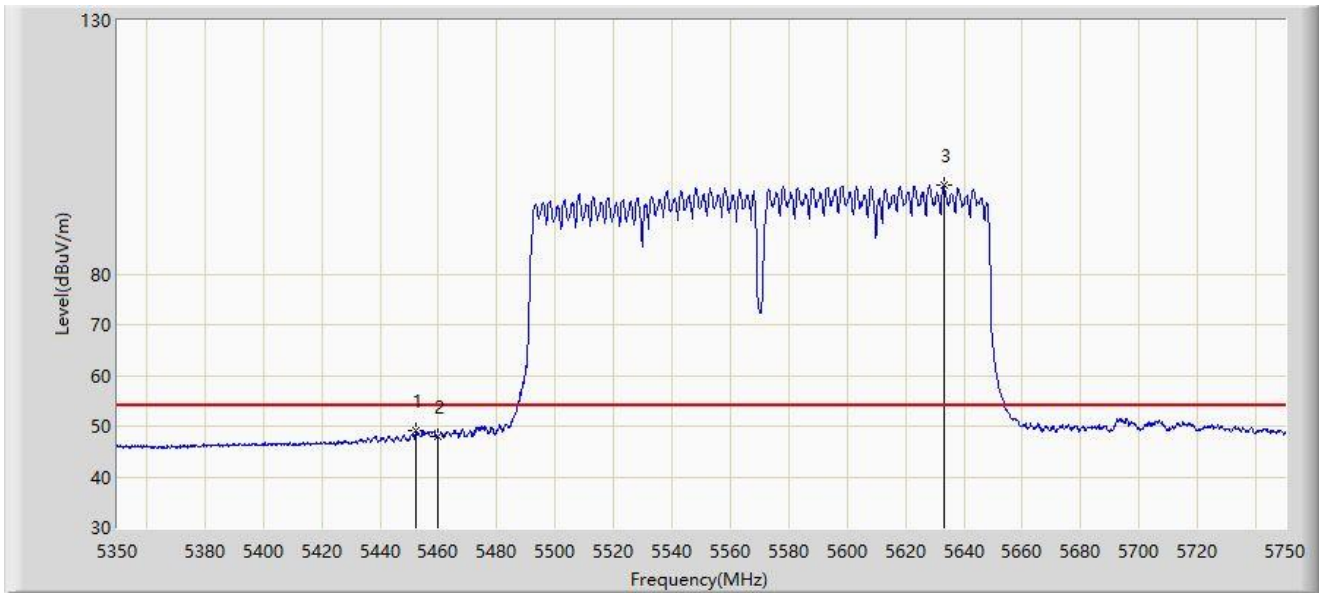


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5452.400	49.021	45.523	-4.979	54.000	3.498	AV
2		5460.000	47.953	44.343	-6.047	54.000	3.610	AV
3		5633.000	97.574	93.067	N/A	N/A	4.507	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHZ	

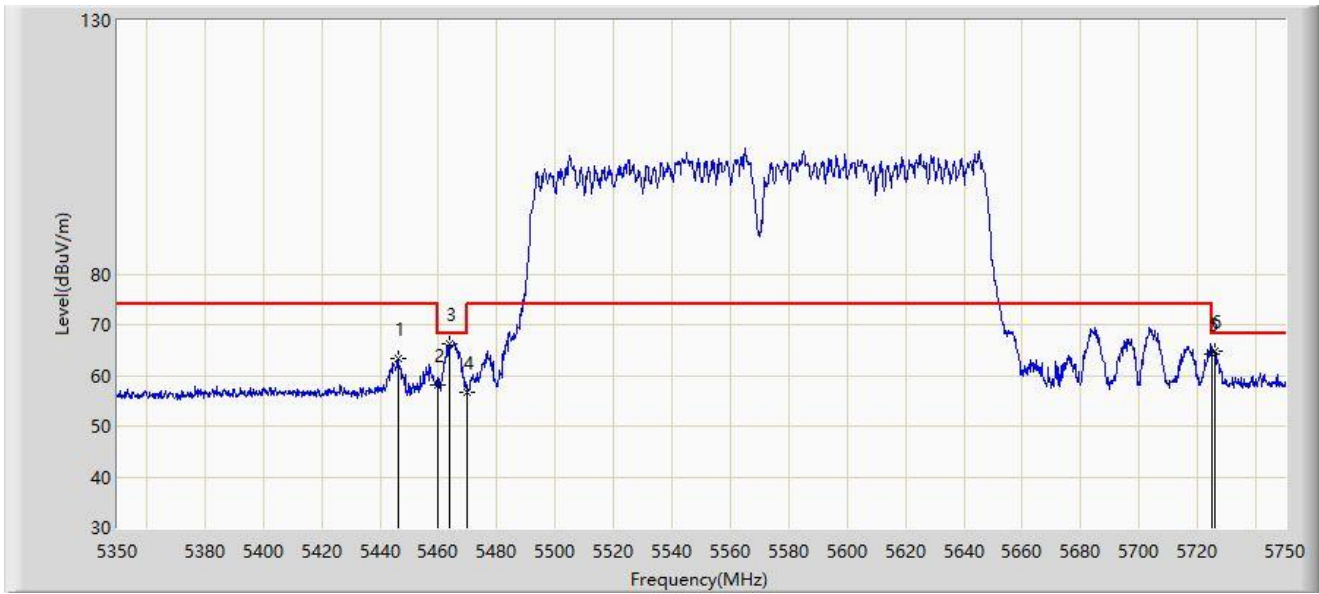


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5446.000	63.294	59.778	-10.706	74.000	3.517	PK
2		5460.000	57.995	54.385	-16.005	74.000	3.610	PK
3		5463.600	66.196	62.518	N/A	N/A	3.678	PK
4		5470.000	56.732	52.934	-11.468	68.200	3.797	PK
5		5725.000	64.155	59.021	-4.045	68.200	5.134	PK
6	*	5725.800	64.898	59.757	-3.302	68.200	5.142	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHZ	

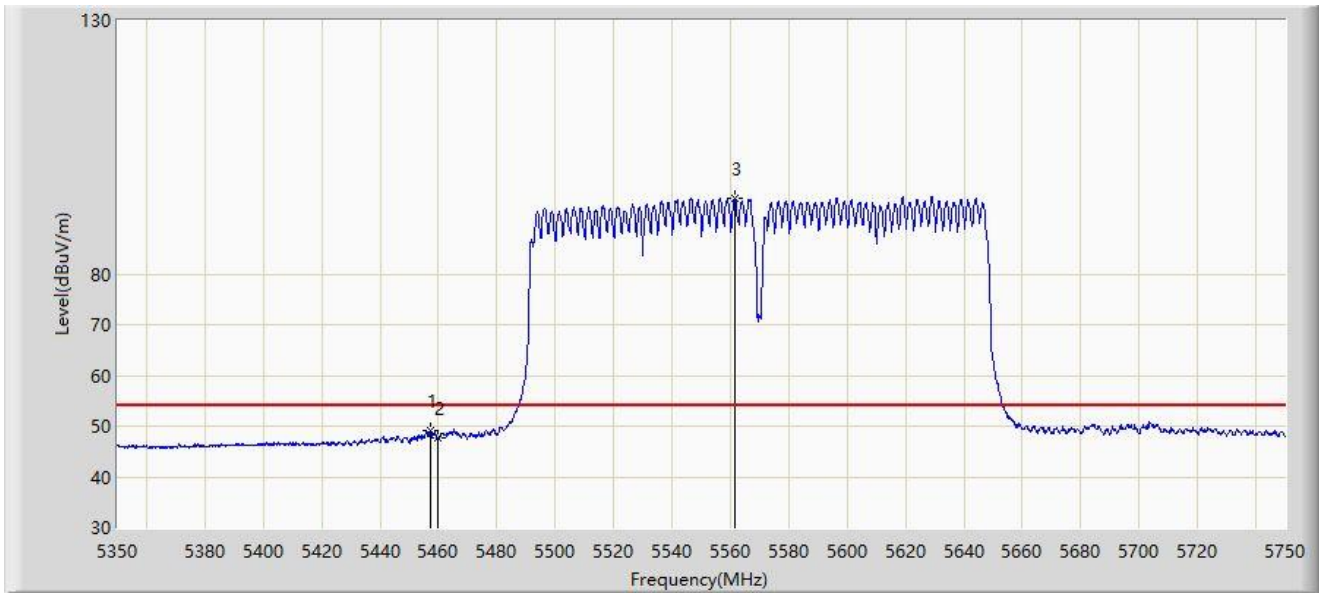


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5457.200	49.138	45.580	-4.862	54.000	3.558	AV
2		5460.000	47.601	43.991	-6.399	54.000	3.610	AV
3		5561.400	94.863	90.846	N/A	N/A	4.017	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

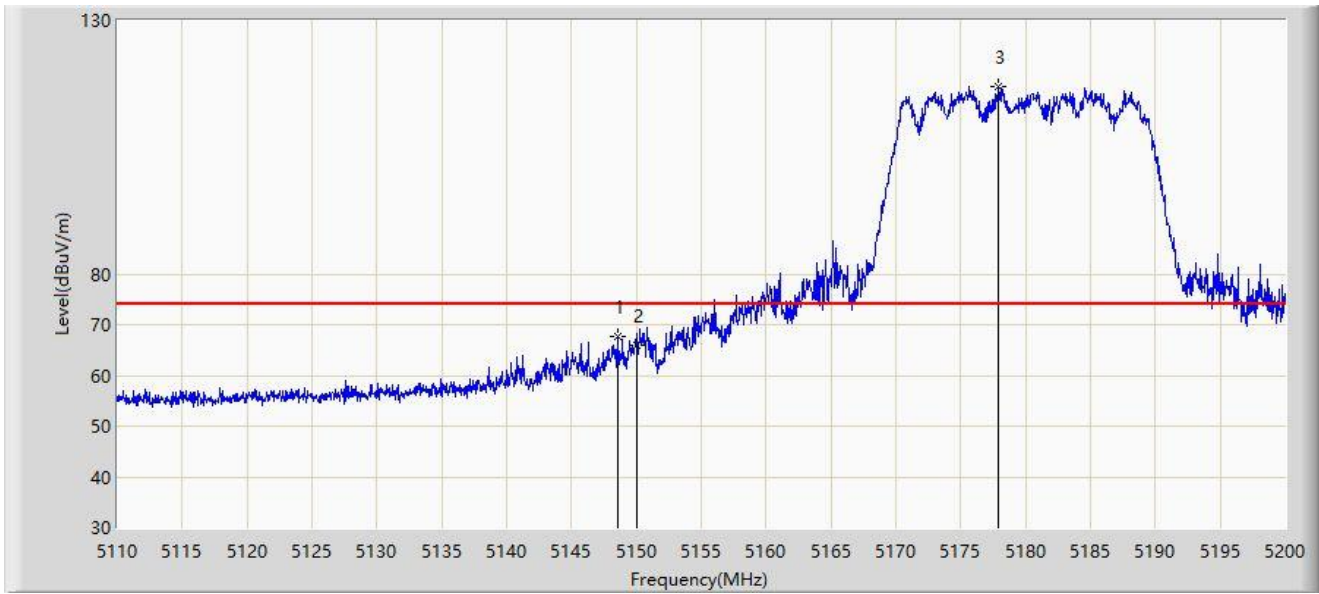


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.610	67.793	64.316	-6.207	74.000	3.478	PK
2		5150.000	65.980	62.498	-8.020	74.000	3.482	PK
3		5177.905	117.099	113.787	N/A	N/A	3.311	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

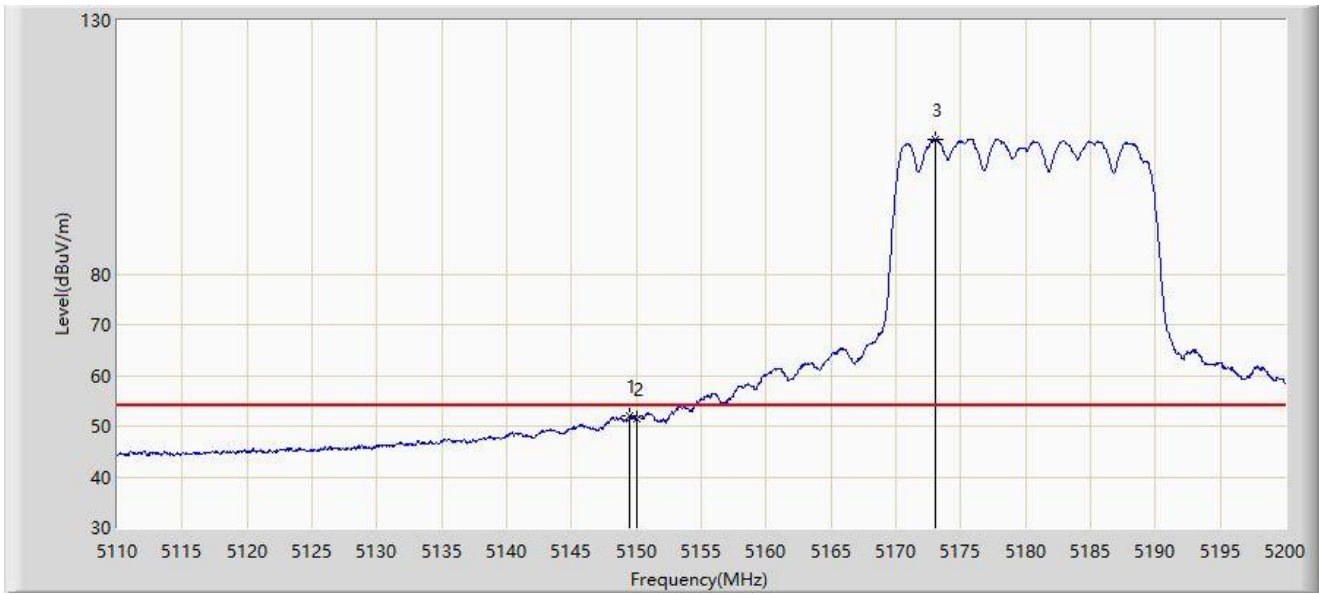


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.465	52.028	48.548	-1.972	54.000	3.479	AV
2		5150.000	51.435	47.953	-2.565	54.000	3.482	AV
3		5173.000	106.577	103.167	N/A	N/A	3.409	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

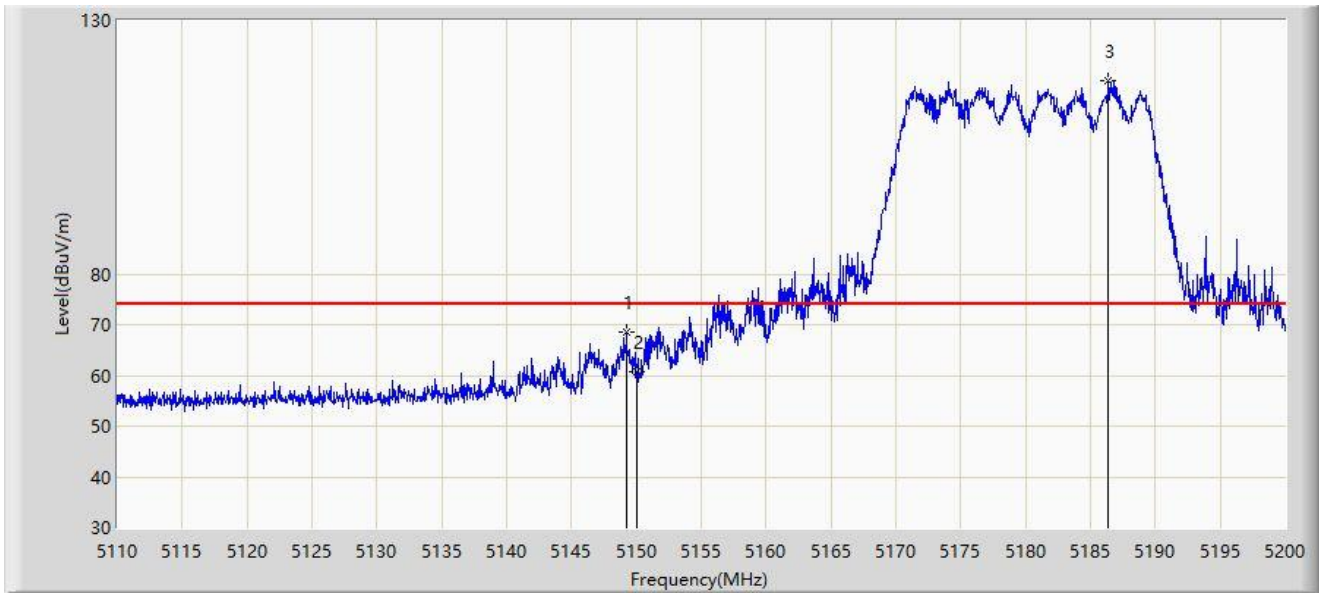


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.240	68.607	65.128	-5.393	74.000	3.479	PK
2		5150.000	60.681	57.199	-13.319	74.000	3.482	PK
3		5186.365	118.088	114.959	N/A	N/A	3.129	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

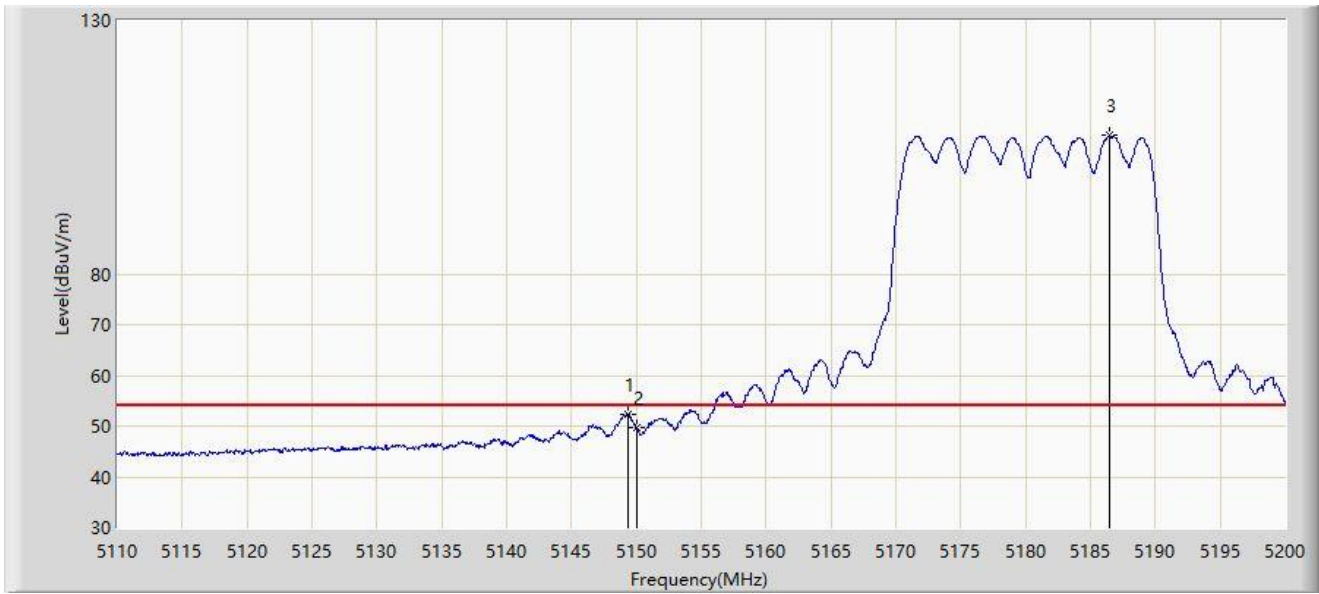


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.330	52.437	48.957	-1.563	54.000	3.480	AV
2		5150.000	49.642	46.160	-4.358	54.000	3.482	AV
3		5186.410	107.272	104.144	N/A	N/A	3.129	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHZ	

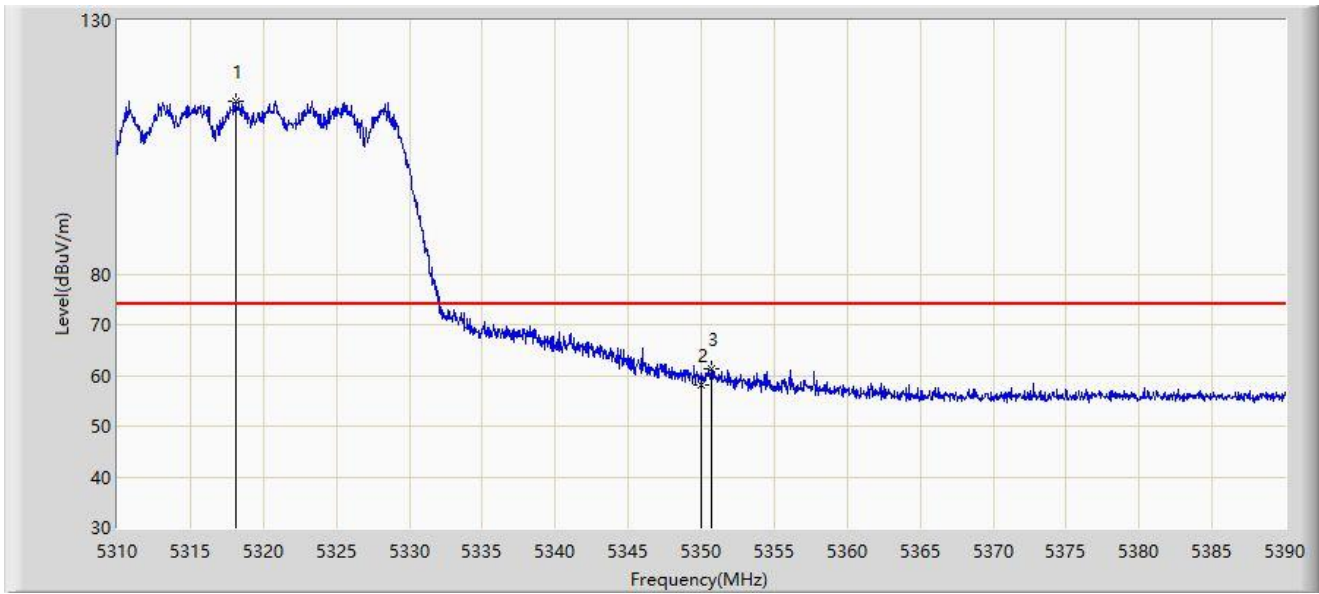


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.080	114.017	110.318	N/A	N/A	3.699	PK
2		5350.000	58.122	54.799	-15.878	74.000	3.323	PK
3	*	5350.720	61.267	57.962	-12.733	74.000	3.304	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHZ	

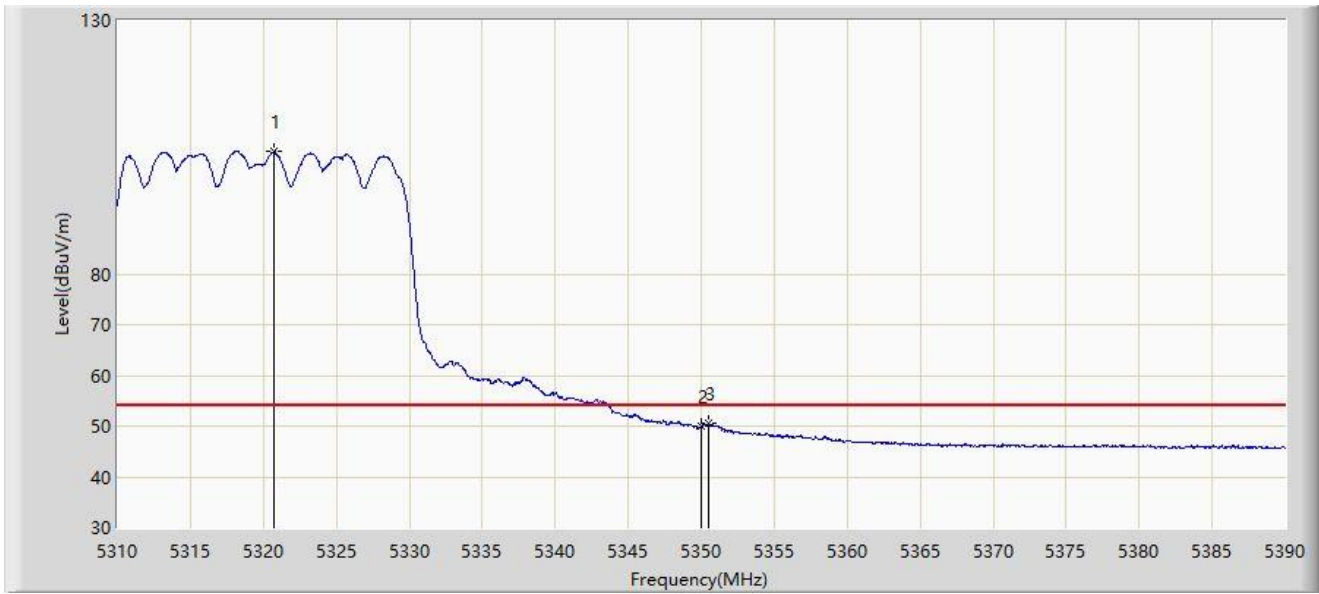


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.680	104.070	100.356	N/A	N/A	3.714	AV
2		5350.000	49.993	46.670	-4.007	54.000	3.323	AV
3	*	5350.480	50.450	47.139	-3.550	54.000	3.311	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHZ	

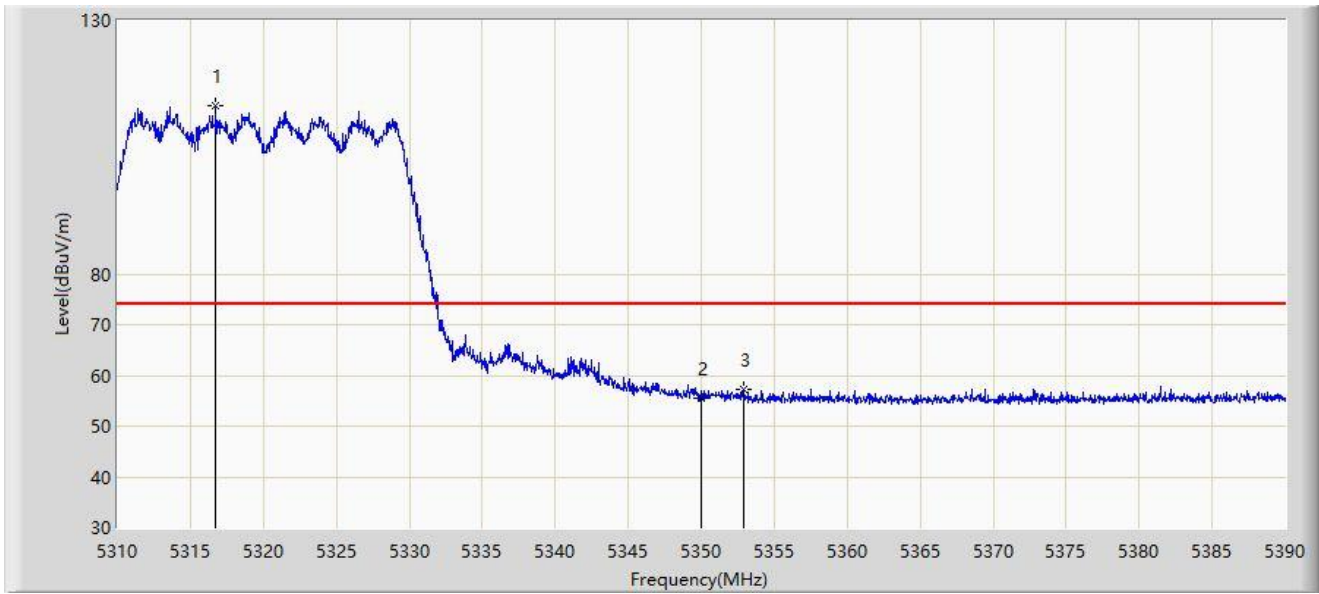


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5316.760	113.235	109.567	N/A	N/A	3.668	PK
2		5350.000	55.651	52.328	-18.349	74.000	3.323	PK
3	*	5352.920	57.188	53.920	-16.812	74.000	3.267	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHZ	

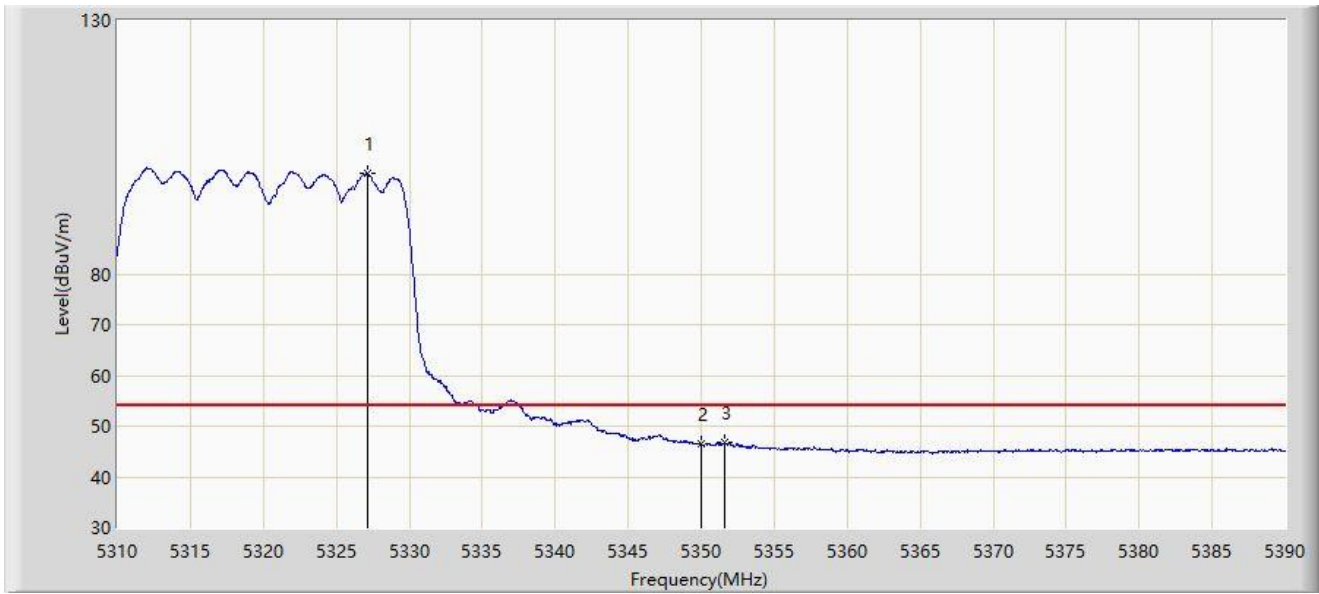


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.120	99.767	96.016	N/A	N/A	3.752	AV
2		5350.000	46.609	43.286	-7.391	54.000	3.323	AV
3	*	5351.560	46.685	43.402	-7.315	54.000	3.282	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHZ	

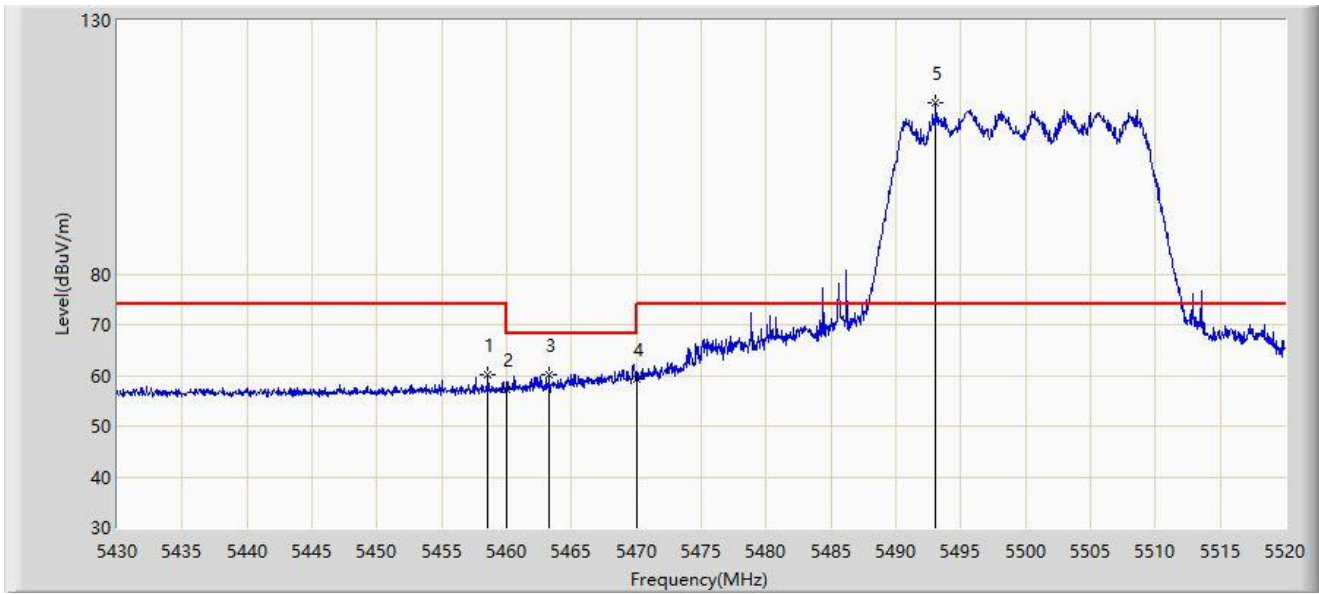


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.575	60.197	56.613	-13.803	74.000	3.584	PK
2		5460.000	57.245	53.635	-16.755	74.000	3.610	PK
3	*	5463.300	60.139	56.467	-8.061	68.200	3.672	PK
4		5470.000	59.354	55.556	-8.846	68.200	3.797	PK
5		5493.090	113.704	109.997	N/A	N/A	3.706	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHZ	

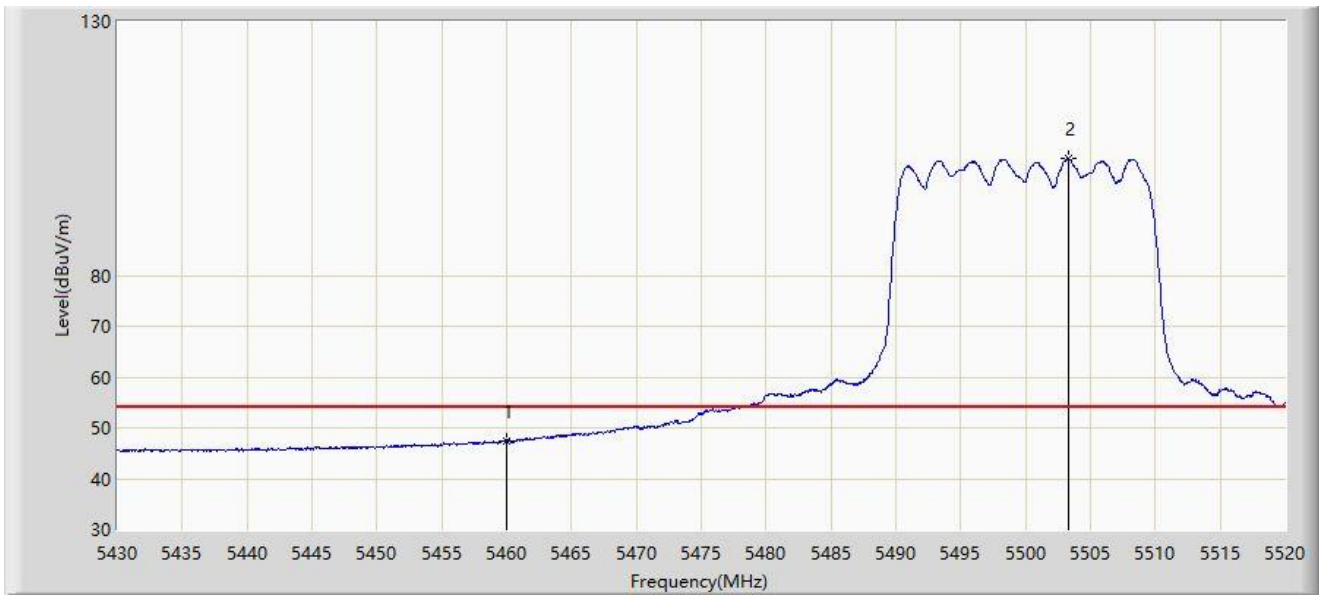


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	47.533	43.923	-6.467	54.000	3.610	AV
2		5503.305	102.974	99.391	N/A	N/A	3.583	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHZ	

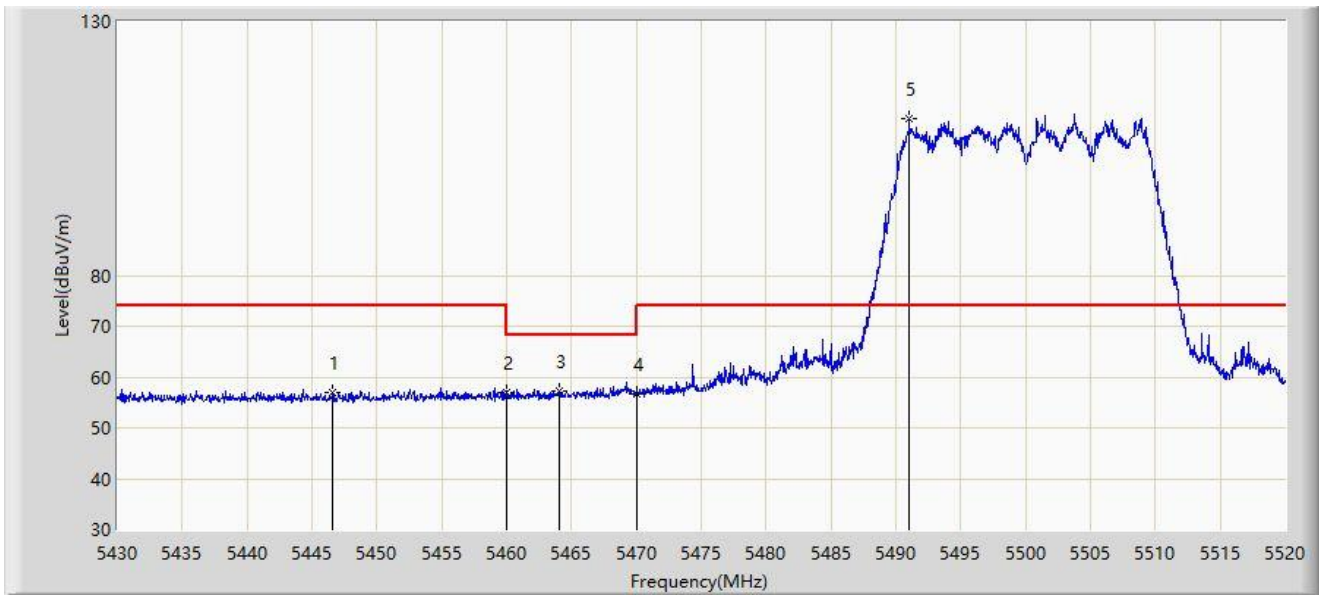


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5446.605	56.877	53.363	-17.123	74.000	3.514	PK
2		5460.000	56.971	53.361	-17.029	74.000	3.610	PK
3	*	5464.065	57.221	53.534	-10.979	68.200	3.687	PK
4		5470.000	56.772	52.974	-11.428	68.200	3.797	PK
5		5491.020	111.002	107.274	N/A	N/A	3.729	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHZ	

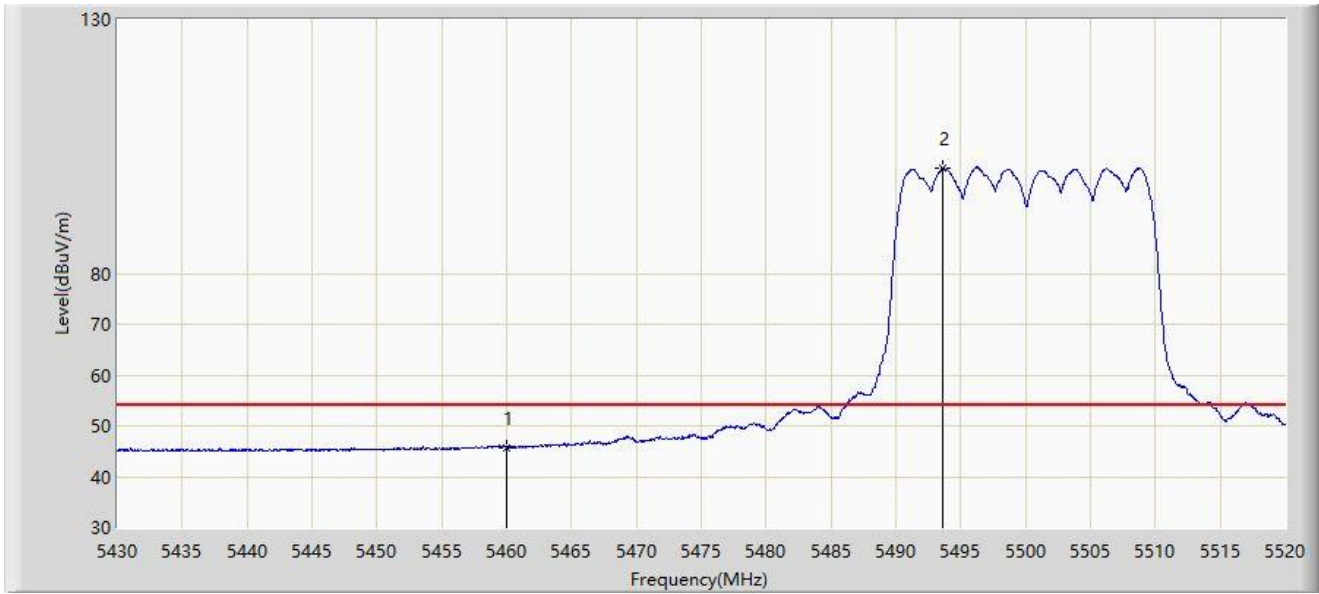


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	45.797	42.187	-8.203	54.000	3.610	AV
2		5493.585	100.705	97.004	N/A	N/A	3.701	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHZ	

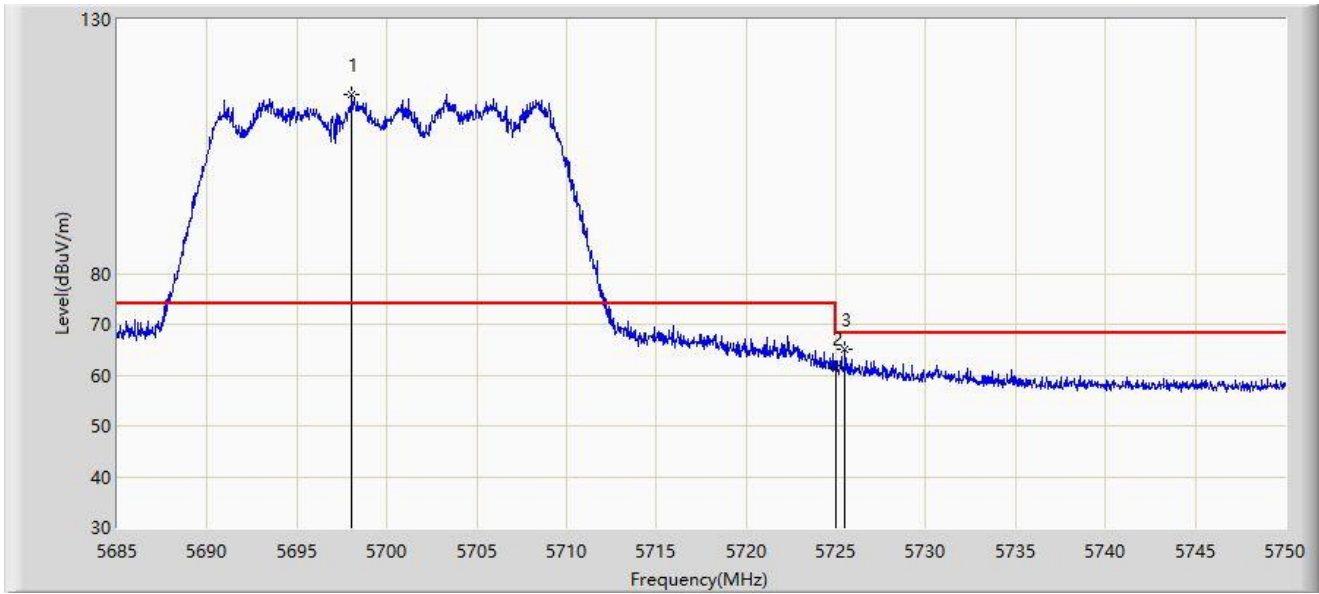


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5698.033	115.262	110.429	N/A	N/A	4.834	PK
2		5725.000	61.369	56.235	-6.831	68.200	5.134	PK
3	*	5725.495	65.047	59.908	-3.153	68.200	5.138	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHZ	

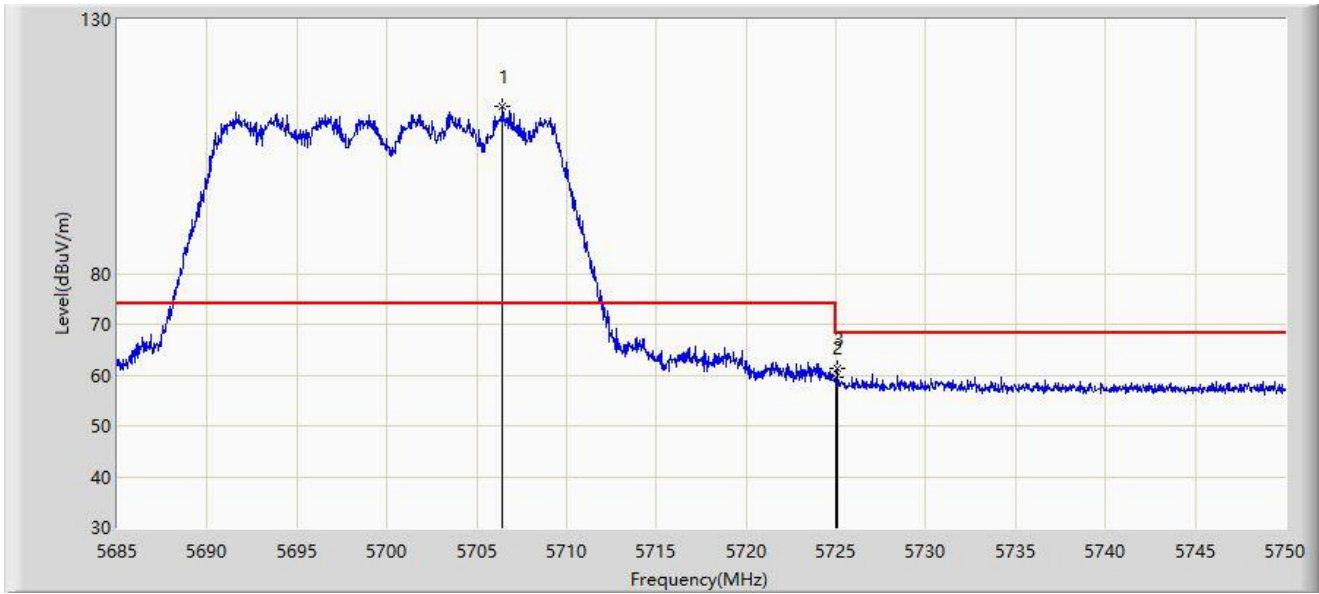


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5706.450	112.755	107.795	N/A	N/A	4.961	PK
2		5725.000	59.456	54.322	-8.744	68.200	5.134	PK
3	*	5725.072	61.168	56.033	-7.032	68.200	5.134	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

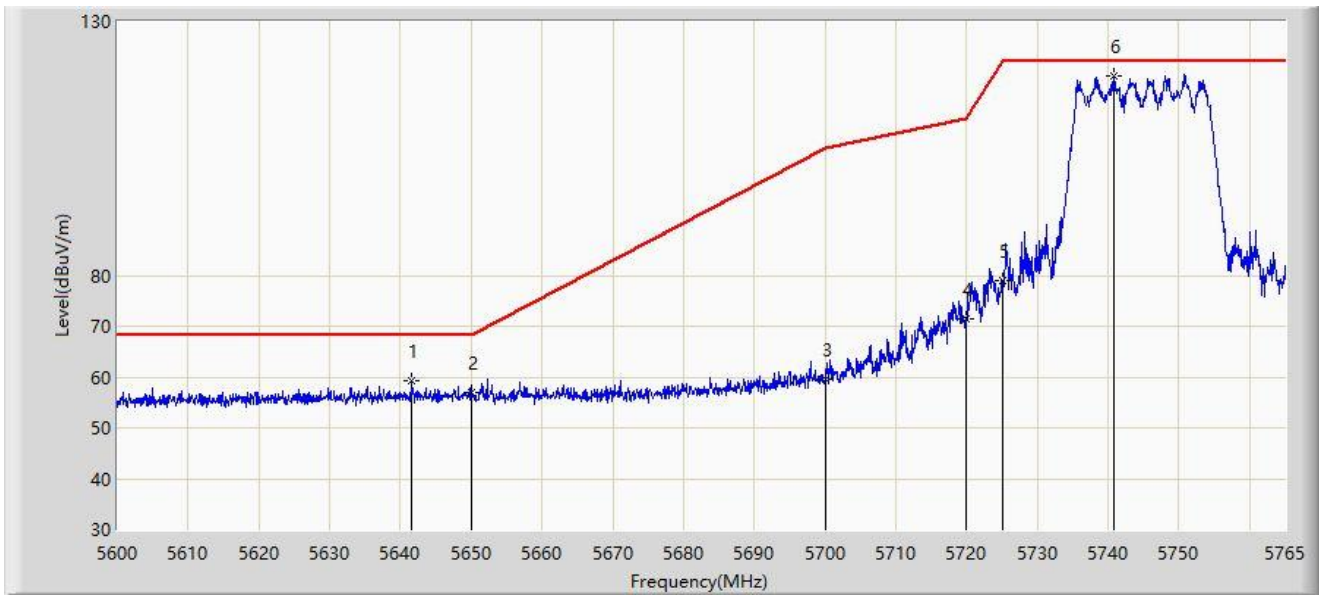


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5641.663	59.249	55.086	-8.951	68.200	4.163	PK
2		5650.000	56.900	52.777	-11.300	68.200	4.122	PK
3		5700.000	59.527	55.090	-45.673	105.200	4.437	PK
4		5720.000	71.513	66.849	-39.287	110.800	4.663	PK
5		5725.000	78.988	74.285	-43.212	122.200	4.703	PK
6		5740.828	119.344	114.891	N/A	N/A	4.453	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

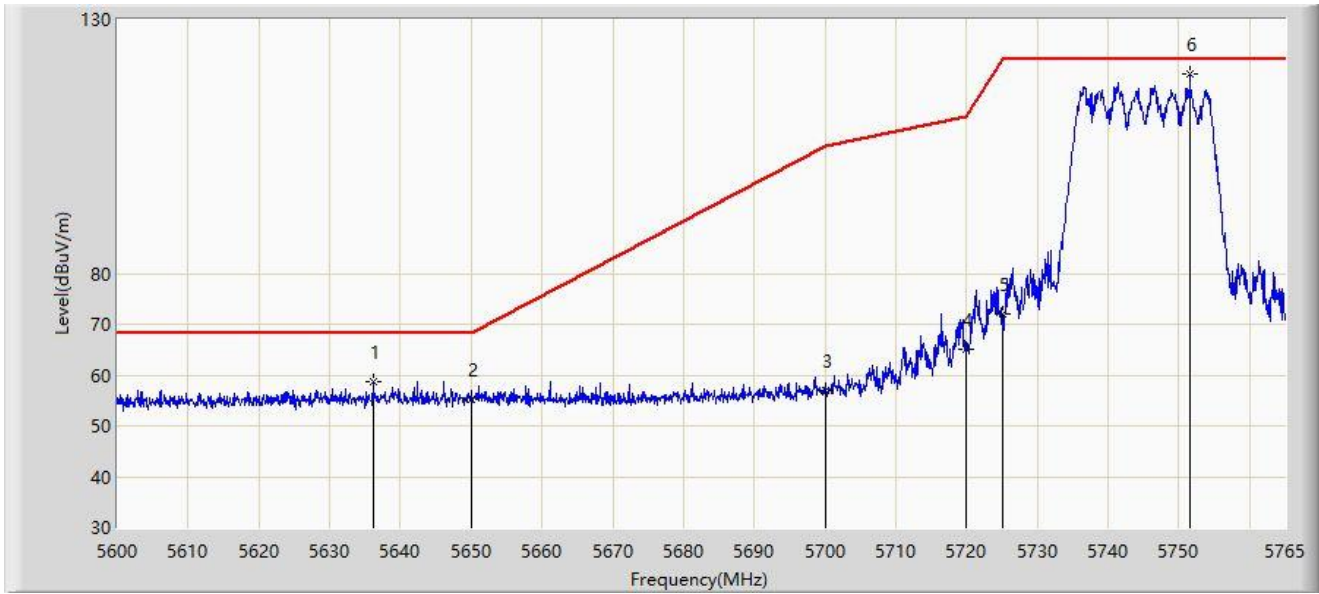


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5636.135	58.592	54.489	-9.608	68.200	4.102	PK
2		5650.000	55.082	50.959	-13.118	68.200	4.122	PK
3		5700.000	56.920	52.483	-48.280	105.200	4.437	PK
4		5720.000	64.983	60.319	-45.817	110.800	4.663	PK
5		5725.000	71.973	67.270	-50.227	122.200	4.703	PK
6		5751.553	119.167	114.668	N/A	N/A	4.498	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

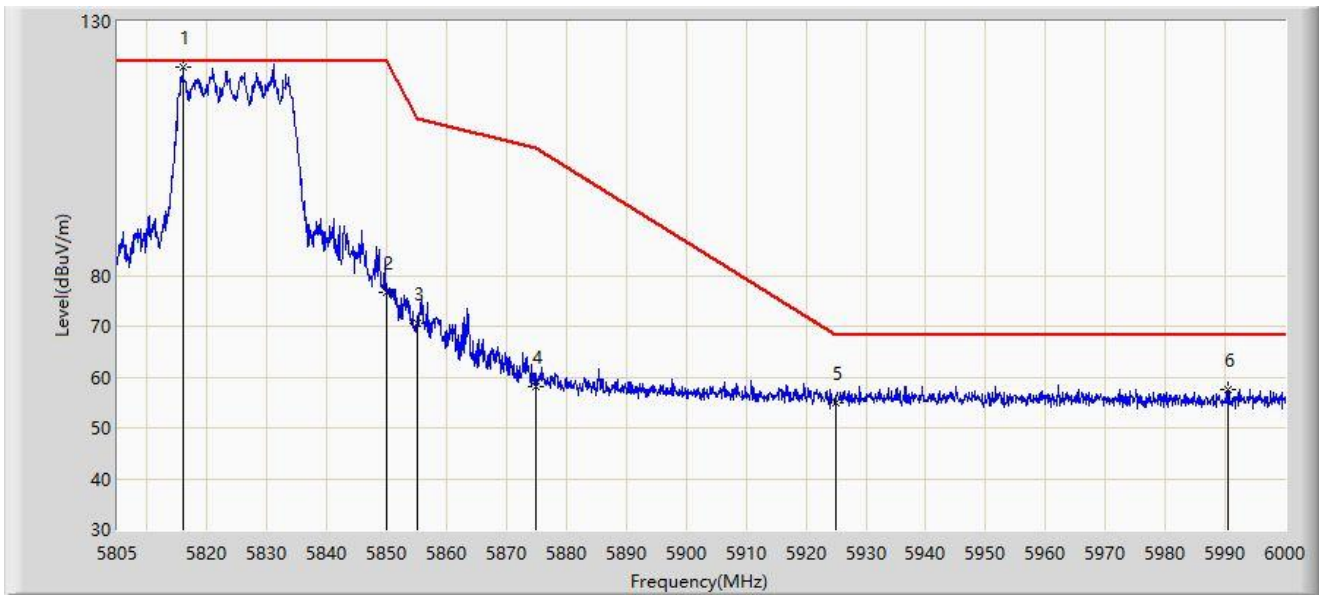


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5816.018	121.037	116.069	N/A	N/A	4.968	PK
2		5850.000	76.712	71.729	-45.488	122.200	4.984	PK
3		5855.000	70.705	65.667	-40.095	110.800	5.038	PK
4		5875.000	58.202	53.071	-46.998	105.200	5.131	PK
5		5925.000	55.052	49.817	-13.148	68.200	5.236	PK
6	*	5990.542	57.488	52.165	-10.712	68.200	5.323	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

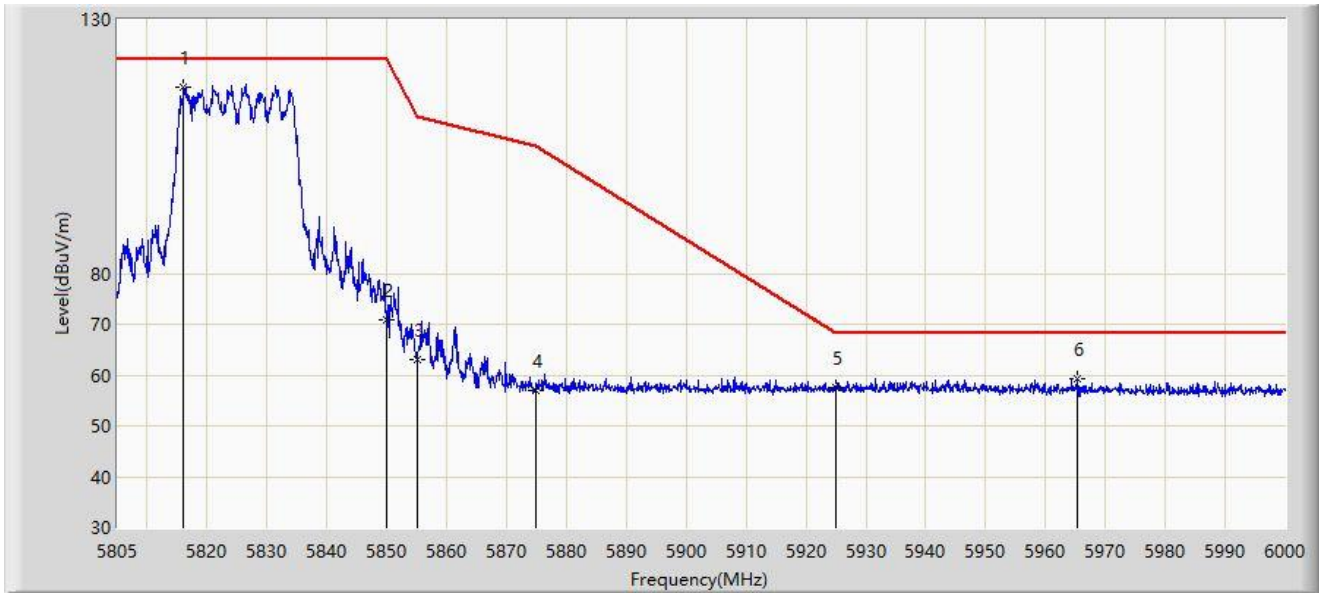


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5816.115	116.604	111.637	N/A	N/A	4.967	PK
2		5850.000	70.972	65.989	-51.228	122.200	4.984	PK
3		5855.000	63.104	58.066	-47.696	110.800	5.038	PK
4		5875.000	56.918	51.787	-48.282	105.200	5.131	PK
5		5925.000	57.454	52.219	-10.746	68.200	5.236	PK
6	*	5965.192	59.187	53.839	-9.013	68.200	5.348	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

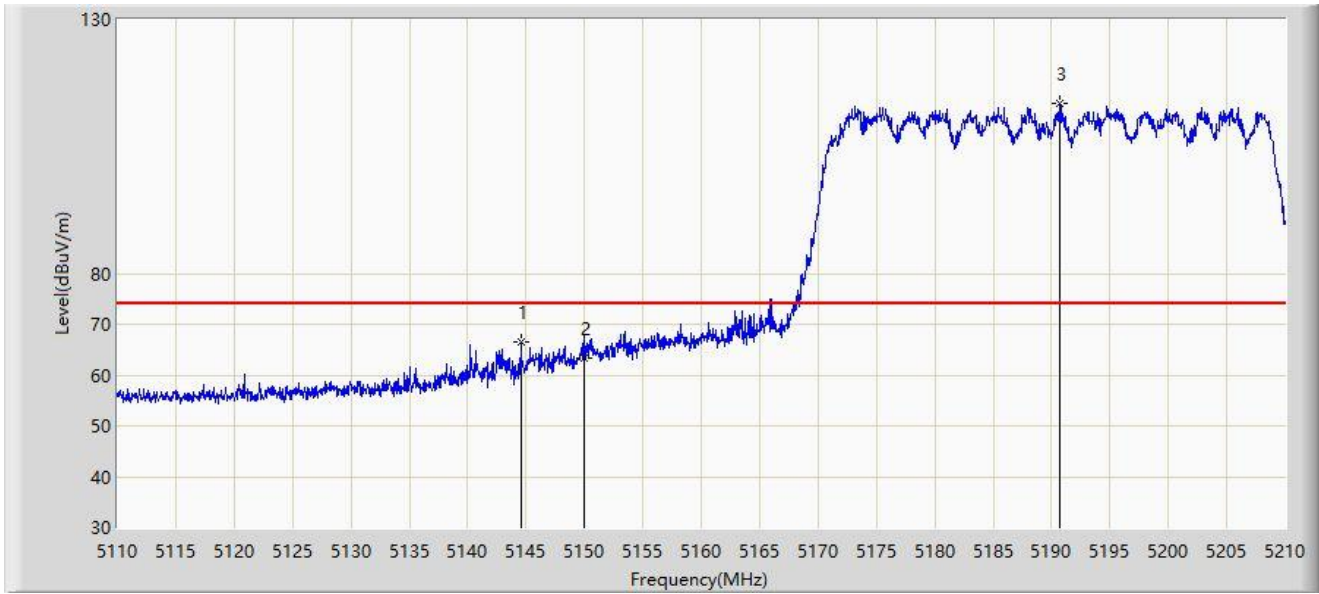


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.550	66.382	62.950	-7.618	74.000	3.432	PK
2		5150.000	63.224	59.742	-10.776	74.000	3.482	PK
3		5190.750	113.586	110.553	N/A	N/A	3.033	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

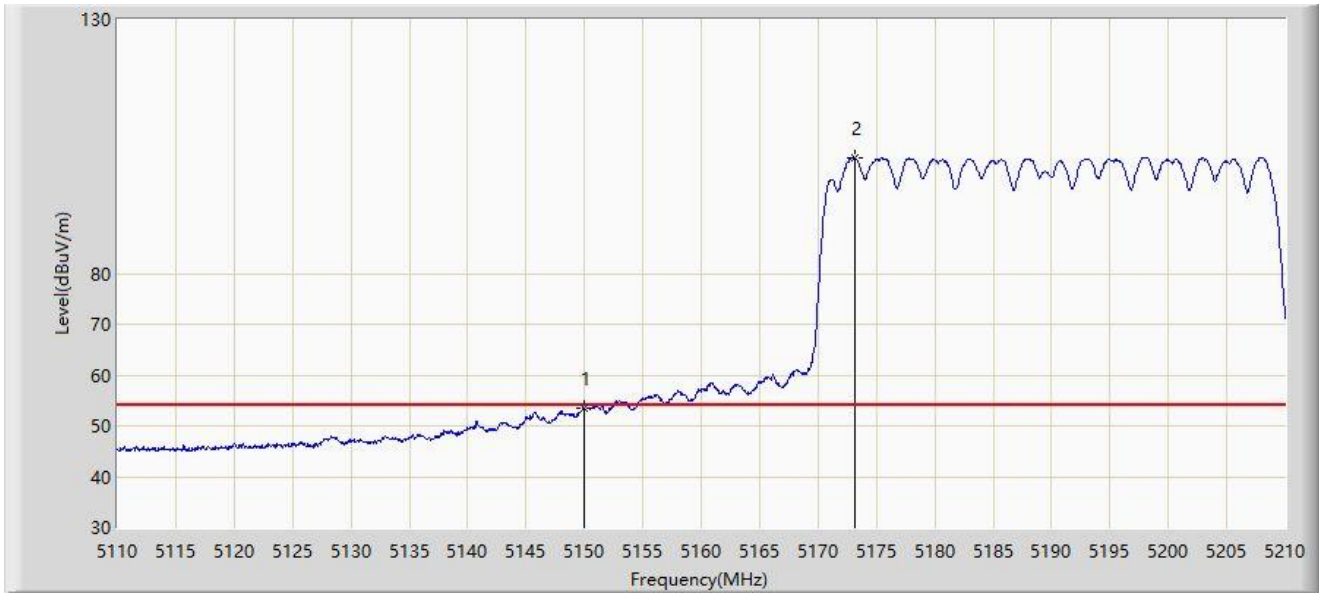


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	53.396	49.914	-0.604	54.000	3.482	AV
2		5173.100	102.726	99.318	N/A	N/A	3.407	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

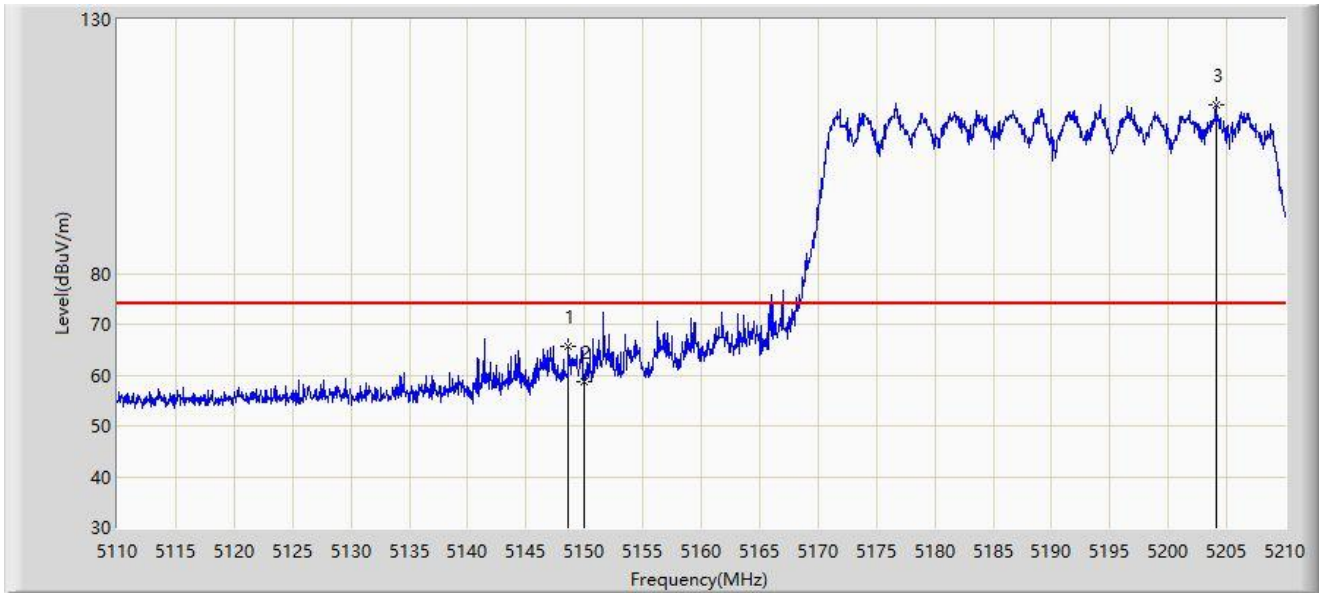


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.600	65.695	62.218	-8.305	74.000	3.478	PK
2		5150.000	58.799	55.317	-15.201	74.000	3.482	PK
3		5204.050	113.130	110.256	N/A	N/A	2.874	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

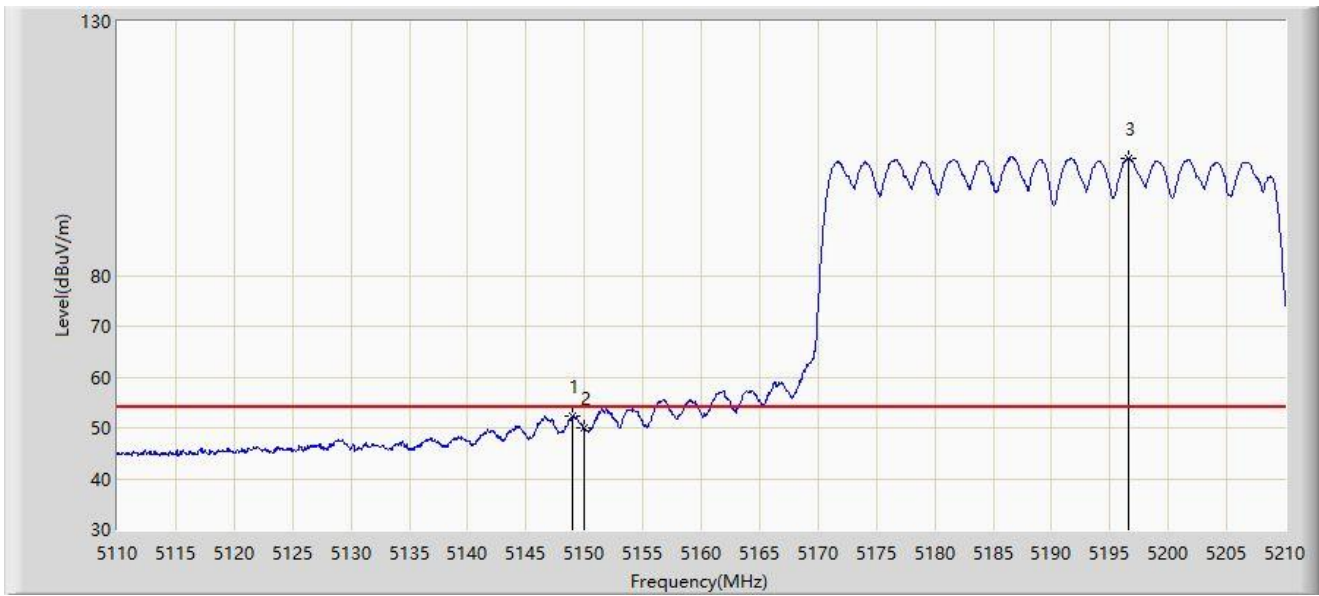


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.000	52.239	48.760	-1.761	54.000	3.479	AV
2		5150.000	49.872	46.390	-4.128	54.000	3.482	AV
3		5196.550	102.970	100.063	N/A	N/A	2.907	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHZ	

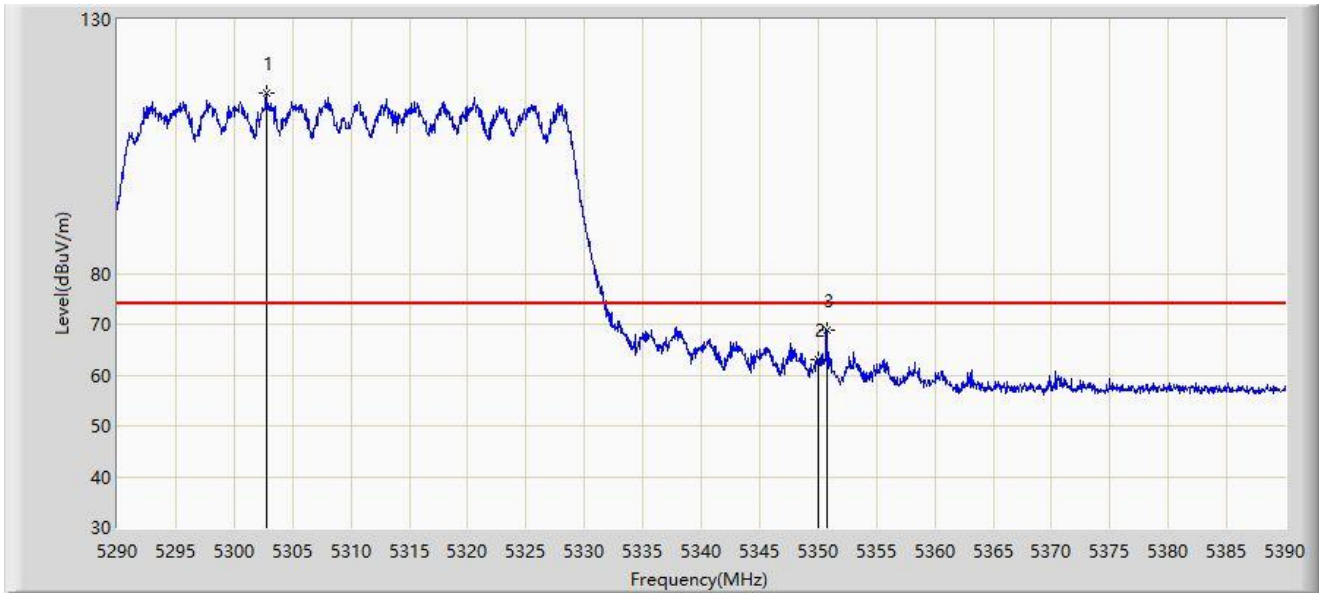


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5302.750	115.475	112.099	N/A	N/A	3.375	PK
2		5350.000	62.909	59.586	-11.091	74.000	3.323	PK
3	*	5350.750	68.767	65.463	-5.233	74.000	3.304	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHZ	

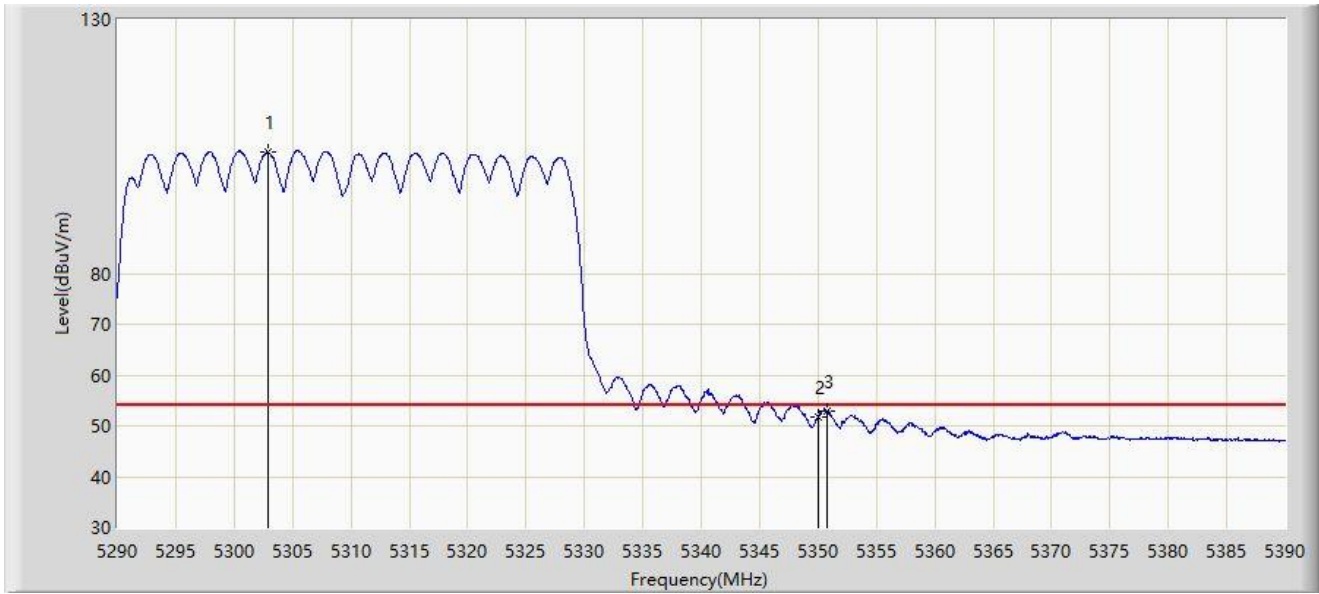


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5302.850	103.907	100.529	N/A	N/A	3.378	AV
2		5350.000	51.698	48.375	-2.302	54.000	3.323	AV
3	*	5350.750	53.028	49.724	-0.972	54.000	3.304	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHZ	

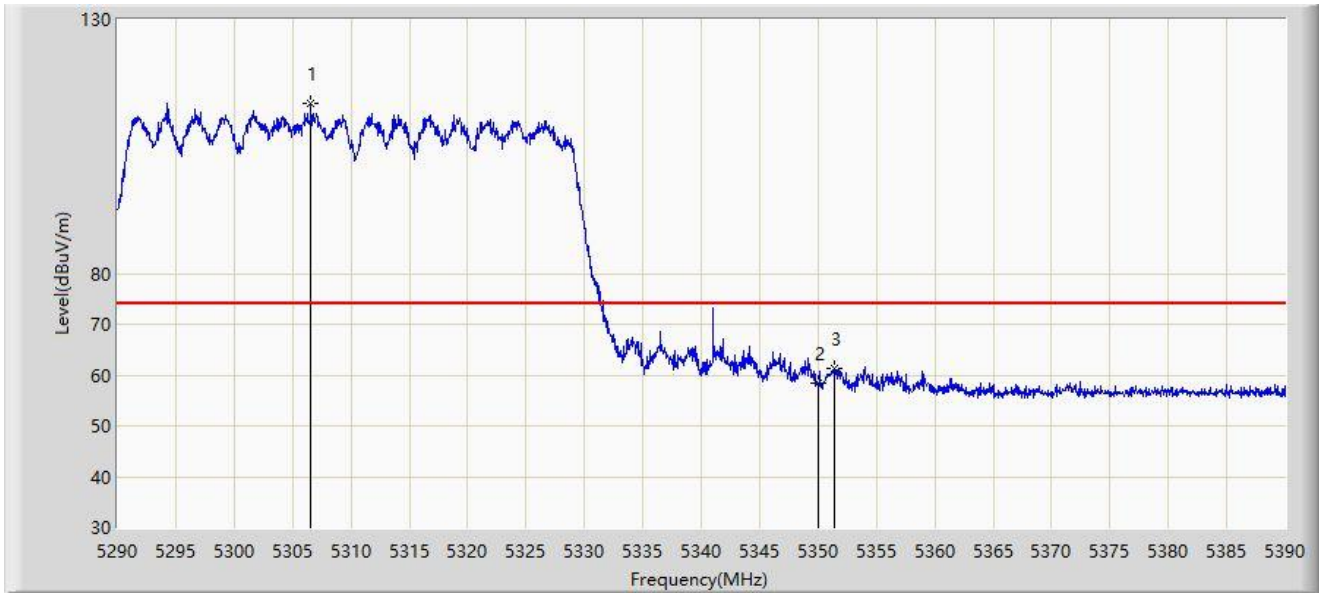


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5306.600	113.389	109.938	N/A	N/A	3.450	PK
2		5350.000	58.299	54.976	-15.701	74.000	3.323	PK
3	*	5351.450	61.281	57.995	-12.719	74.000	3.285	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHZ	

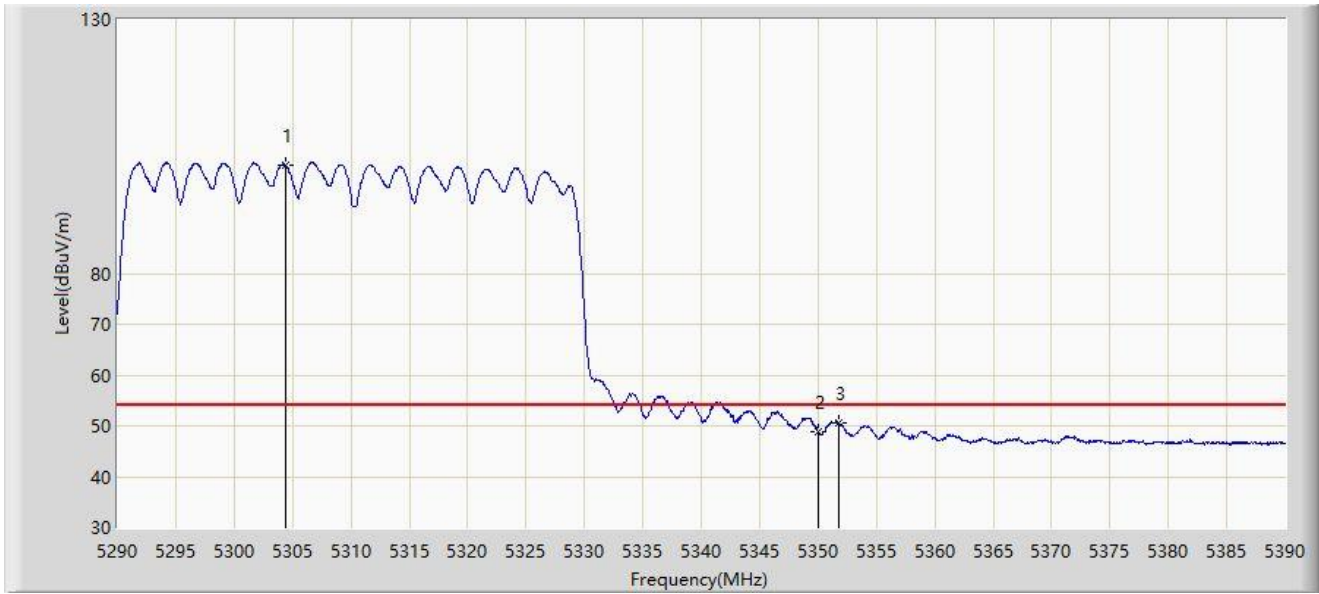


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5304.400	101.304	97.896	N/A	N/A	3.408	AV
2		5350.000	48.882	45.559	-5.118	54.000	3.323	AV
3	*	5351.750	50.687	47.409	-3.313	54.000	3.278	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHZ	

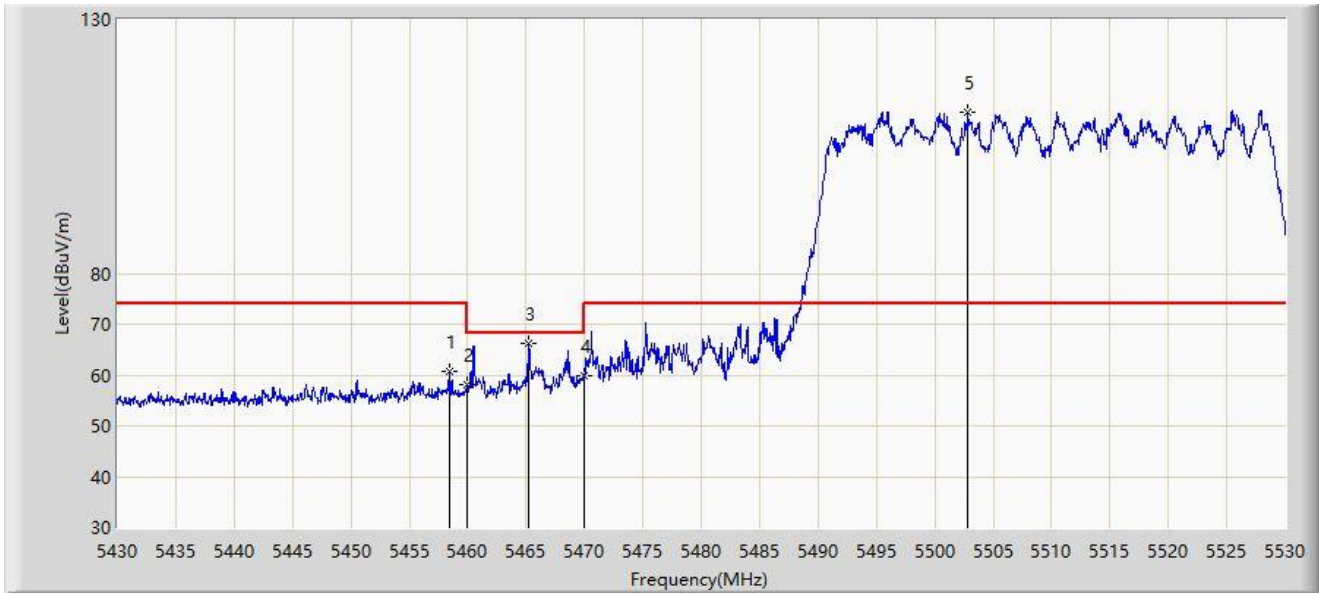


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.400	60.694	57.114	-13.306	74.000	3.580	PK
2		5460.000	58.188	54.578	-15.812	74.000	3.610	PK
3	*	5465.250	66.250	62.541	-1.950	68.200	3.709	PK
4		5470.000	59.921	56.123	-8.279	68.200	3.797	PK
5		5502.850	111.850	108.261	N/A	N/A	3.588	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHZ	

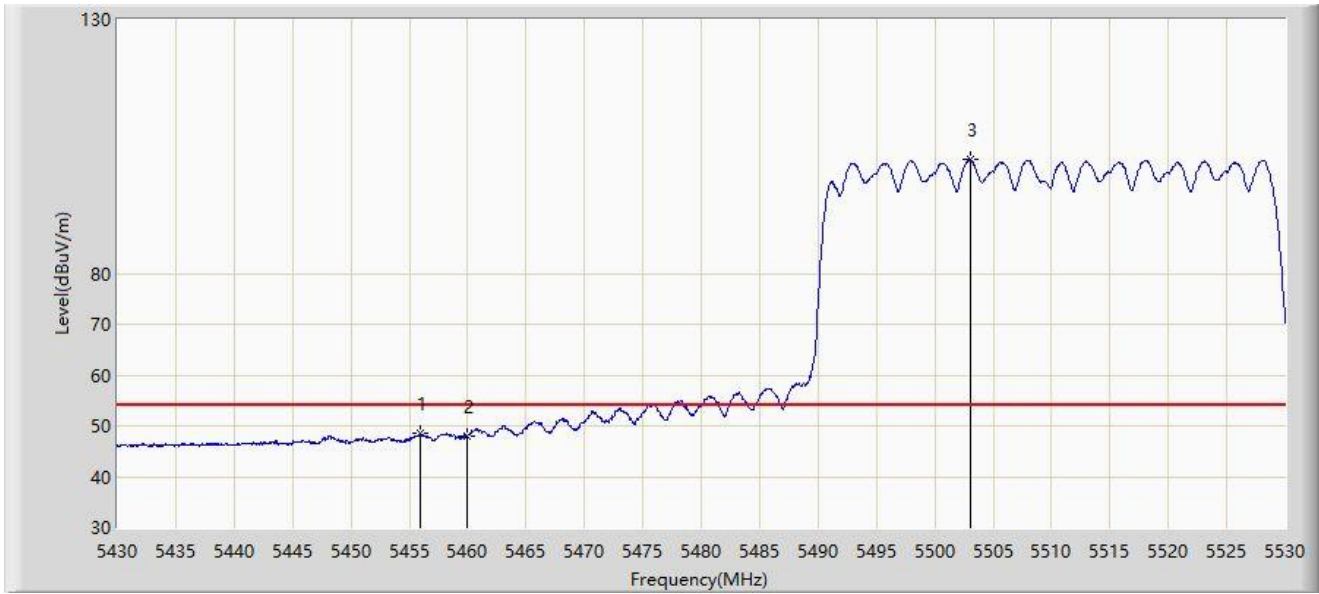


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5455.900	48.507	44.975	-5.493	54.000	3.532	AV
2		5460.000	48.022	44.412	-5.978	54.000	3.610	AV
3		5503.050	102.404	98.818	N/A	N/A	3.587	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHZ	

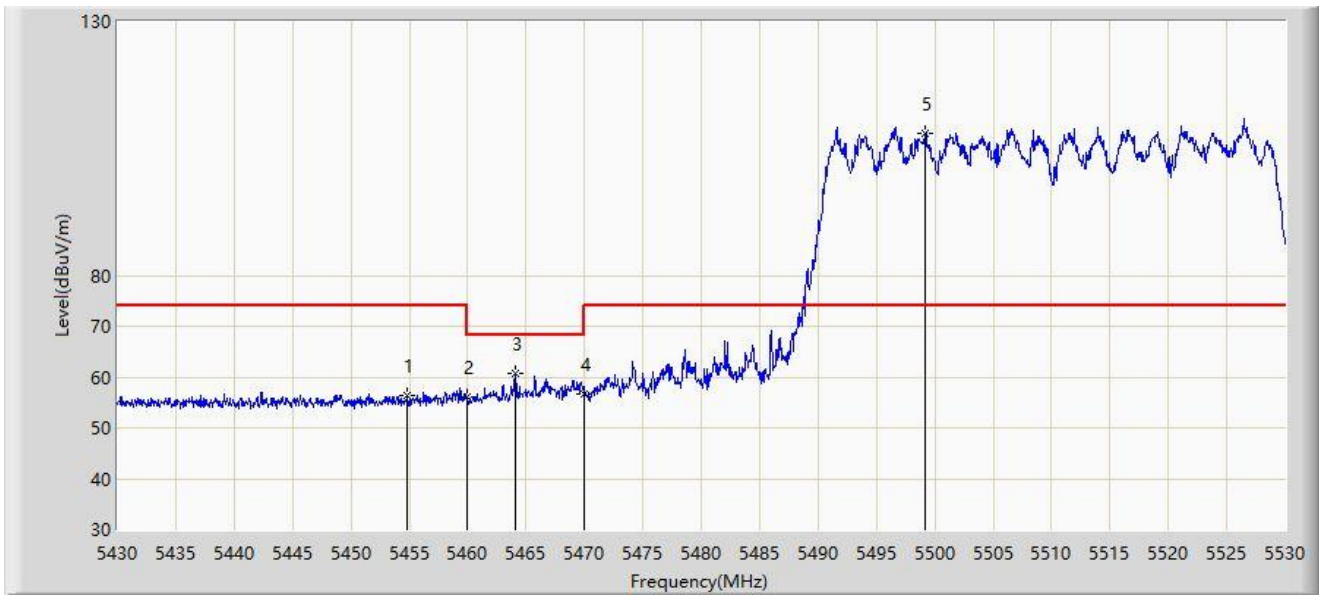


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5454.850	56.248	52.738	-17.752	74.000	3.510	PK
2		5460.000	55.963	52.353	-18.037	74.000	3.610	PK
3	*	5464.050	60.754	57.068	-7.446	68.200	3.687	PK
4		5470.000	56.657	52.859	-11.543	68.200	3.797	PK
5		5499.200	107.913	104.280	N/A	N/A	3.632	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHZ	

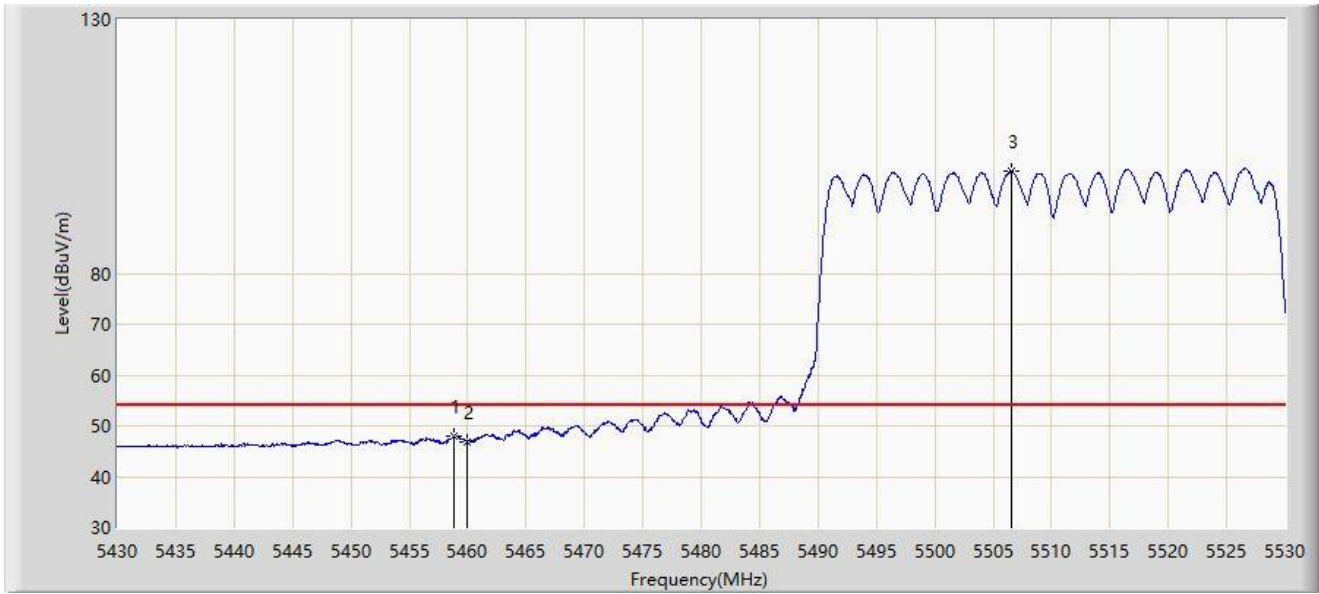


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.800	47.997	44.409	-6.003	54.000	3.588	AV
2		5460.000	46.898	43.288	-7.102	54.000	3.610	AV
3		5506.600	100.047	96.509	N/A	N/A	3.538	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHZ	

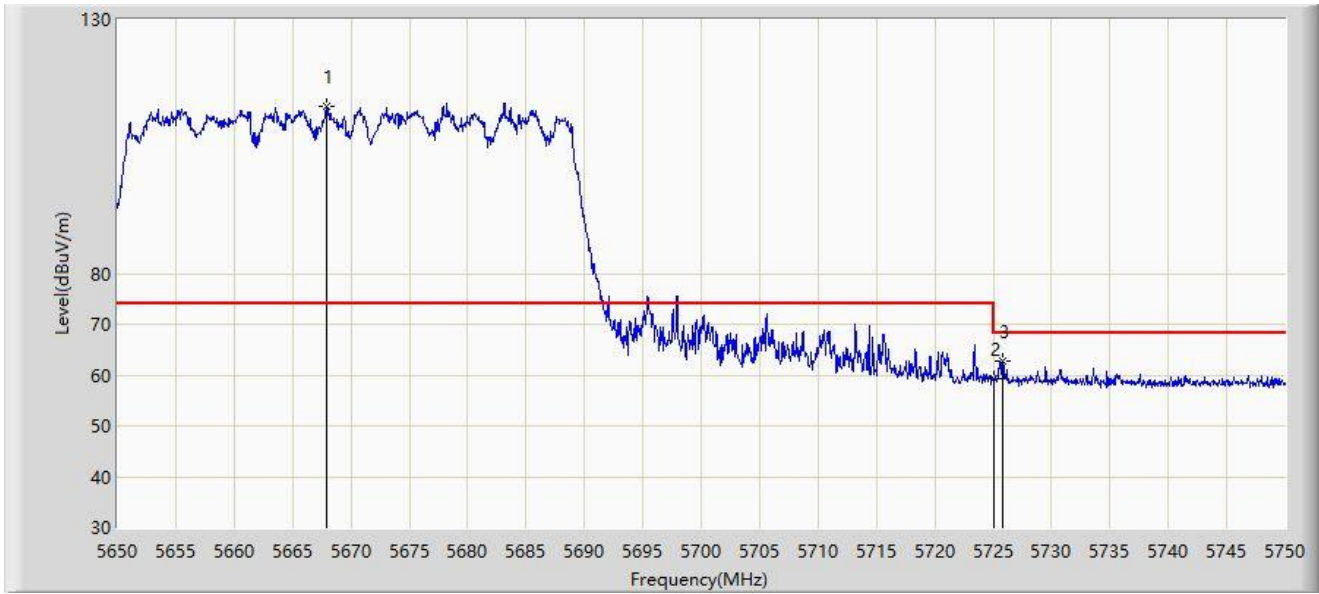


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5667.900	112.833	108.401	N/A	N/A	4.433	PK
2		5725.000	59.404	54.270	-8.796	68.200	5.134	PK
3	*	5725.850	62.785	57.643	-5.415	68.200	5.142	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHZ	

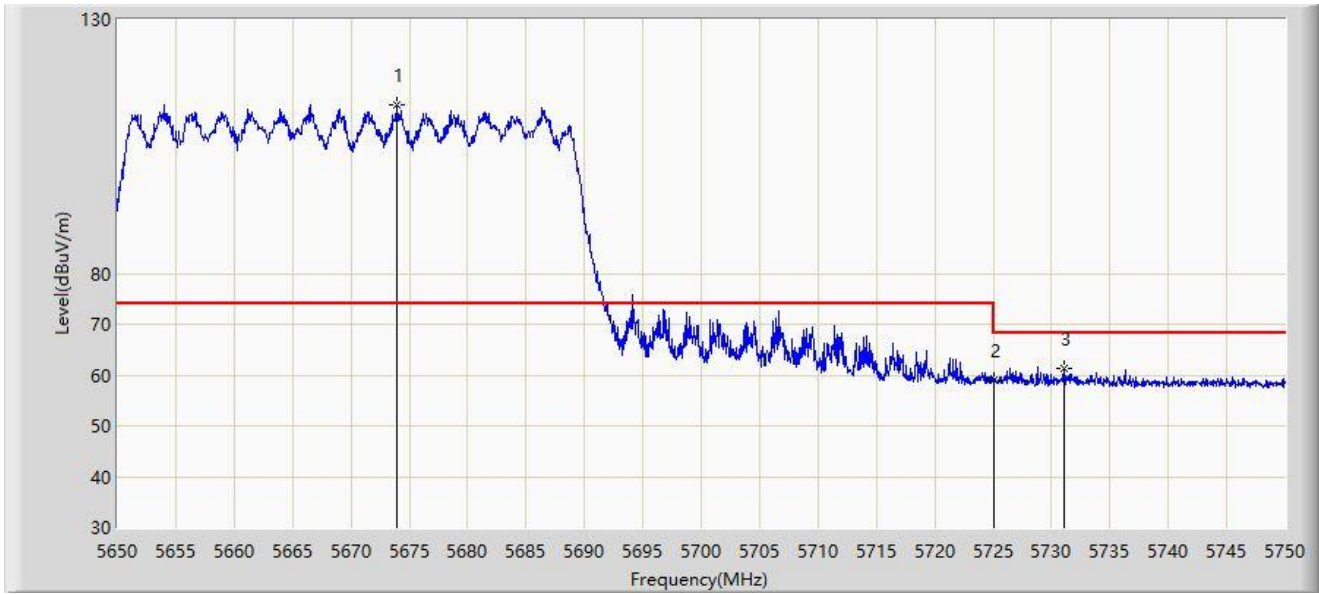


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5673.950	113.261	108.828	N/A	N/A	4.433	PK
2		5725.000	58.882	53.748	-9.318	68.200	5.134	PK
3	*	5731.050	61.344	56.256	-6.856	68.200	5.088	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

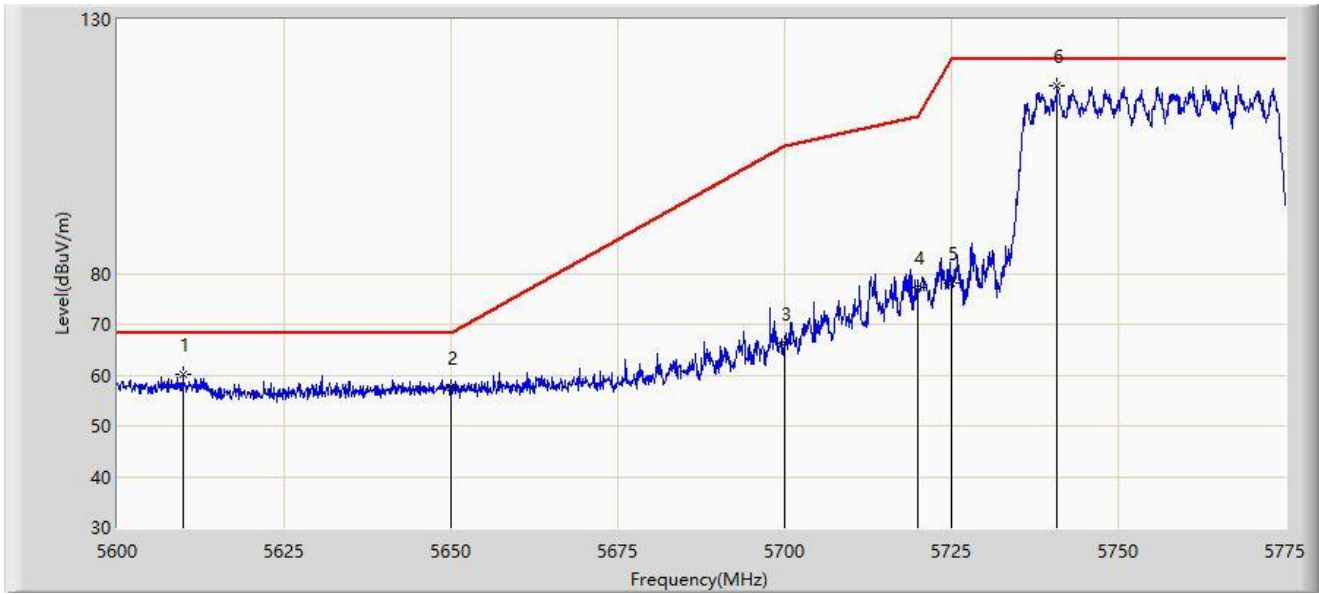


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5609.800	60.097	56.484	-8.103	68.200	3.612	PK
2		5650.000	57.479	53.356	-10.721	68.200	4.122	PK
3		5700.000	66.199	61.762	-39.001	105.200	4.437	PK
4		5720.000	77.152	72.488	-33.648	110.800	4.663	PK
5		5725.000	78.010	73.307	-44.190	122.200	4.703	PK
6		5740.788	116.968	112.515	N/A	N/A	4.453	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

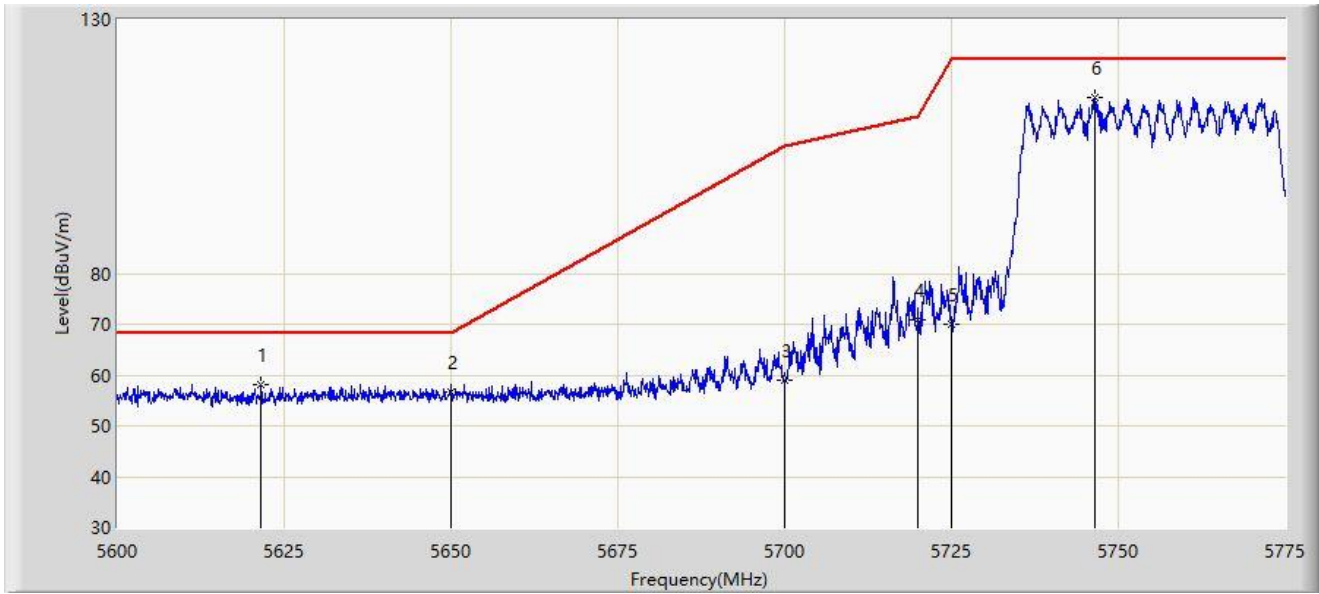


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5621.525	58.161	54.274	-10.039	68.200	3.888	PK
2		5650.000	56.603	52.480	-11.597	68.200	4.122	PK
3		5700.000	58.852	54.415	-46.348	105.200	4.437	PK
4		5720.000	70.773	66.109	-40.027	110.800	4.663	PK
5		5725.000	70.099	65.396	-52.101	122.200	4.703	PK
6		5746.388	114.651	110.214	N/A	N/A	4.437	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

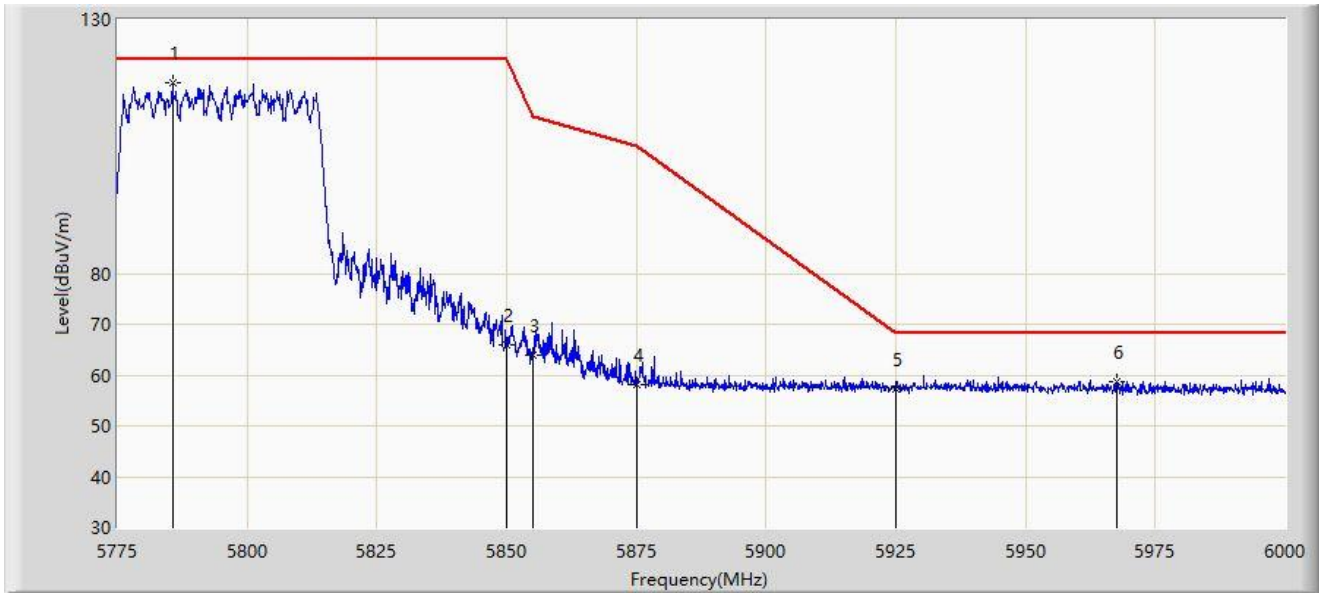


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5785.575	117.660	112.685	N/A	N/A	4.976	PK
2		5850.000	66.078	61.095	-56.122	122.200	4.984	PK
3		5855.000	63.931	58.893	-46.869	110.800	5.038	PK
4		5875.000	58.110	52.979	-47.090	105.200	5.131	PK
5		5925.000	57.370	52.135	-10.830	68.200	5.236	PK
6	*	5967.712	58.809	53.482	-9.391	68.200	5.327	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

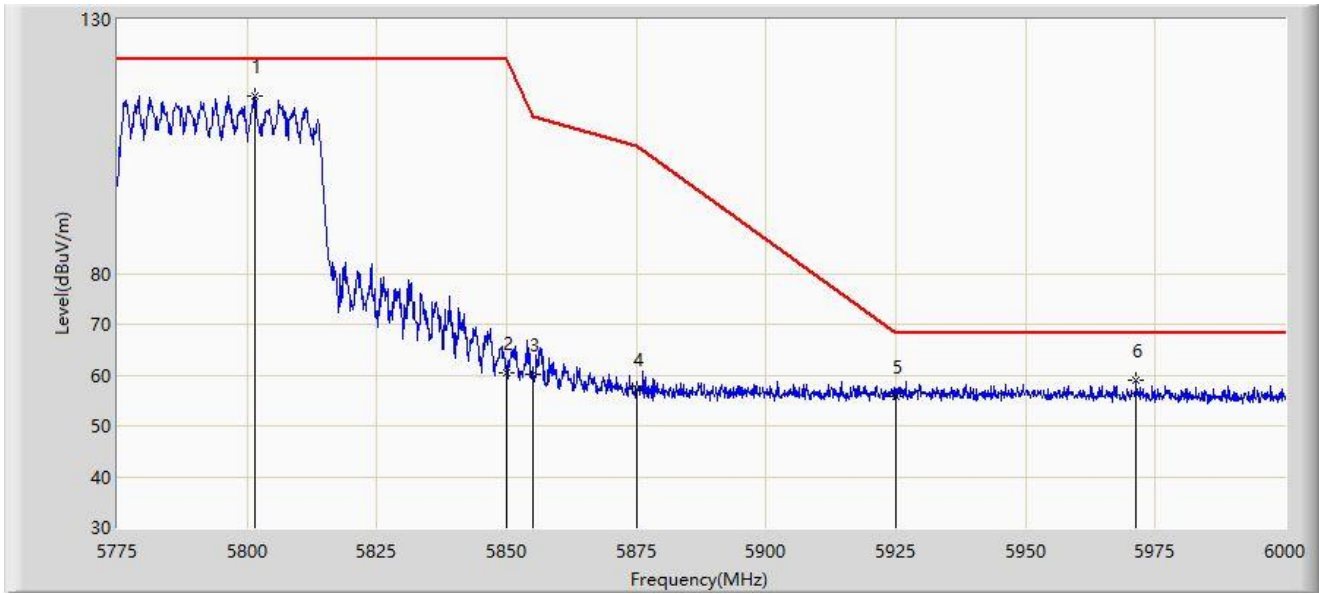


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5801.550	114.895	109.832	N/A	N/A	5.063	PK
2		5850.000	60.435	55.452	-61.765	122.200	4.984	PK
3		5855.000	60.182	55.144	-50.618	110.800	5.038	PK
4		5875.000	57.296	52.165	-47.904	105.200	5.131	PK
5		5925.000	55.674	50.439	-12.526	68.200	5.236	PK
6	*	5971.312	58.872	53.576	-9.328	68.200	5.295	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

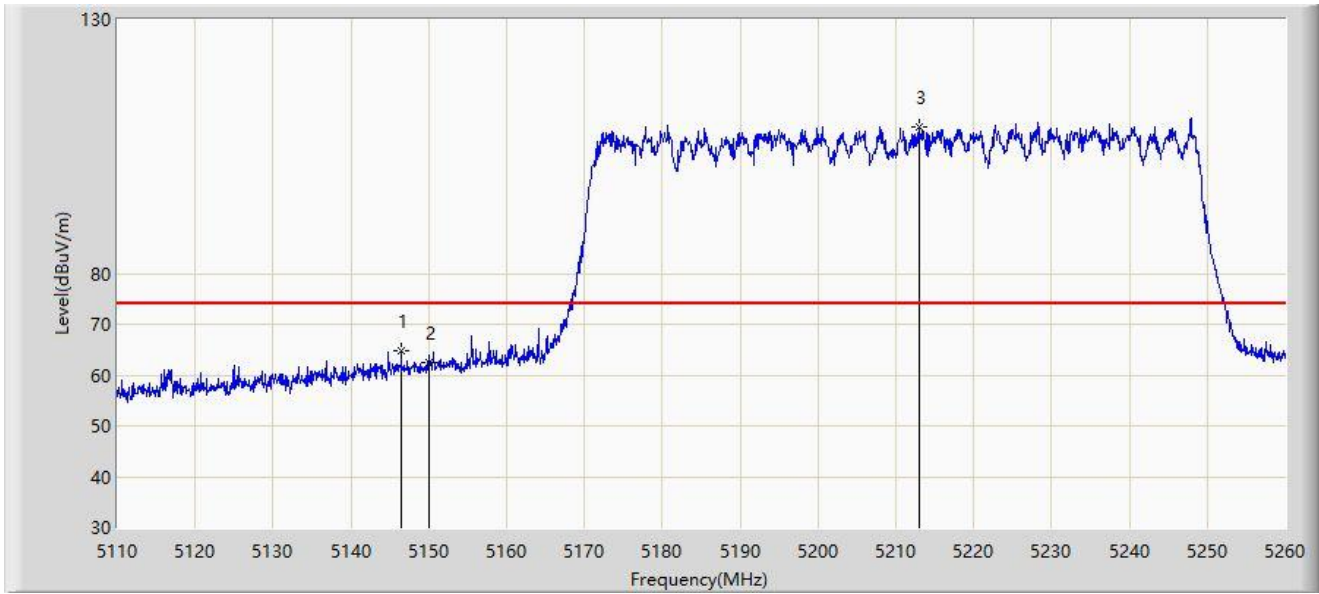


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.450	64.648	61.192	-9.352	74.000	3.456	PK
2		5150.000	62.607	59.125	-11.393	74.000	3.482	PK
3		5212.975	108.735	105.827	N/A	N/A	2.908	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

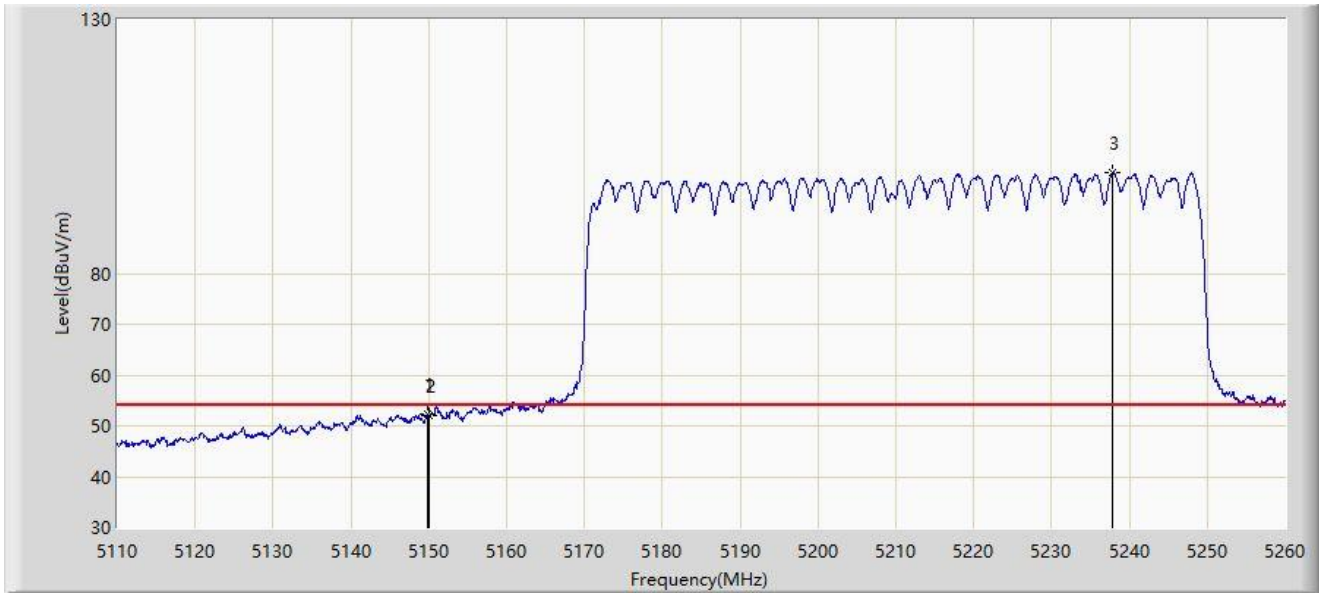


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.900	52.235	48.754	-1.765	54.000	3.482	AV
2		5150.000	51.976	48.494	-2.024	54.000	3.482	AV
3		5237.800	99.809	96.589	N/A	N/A	3.219	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

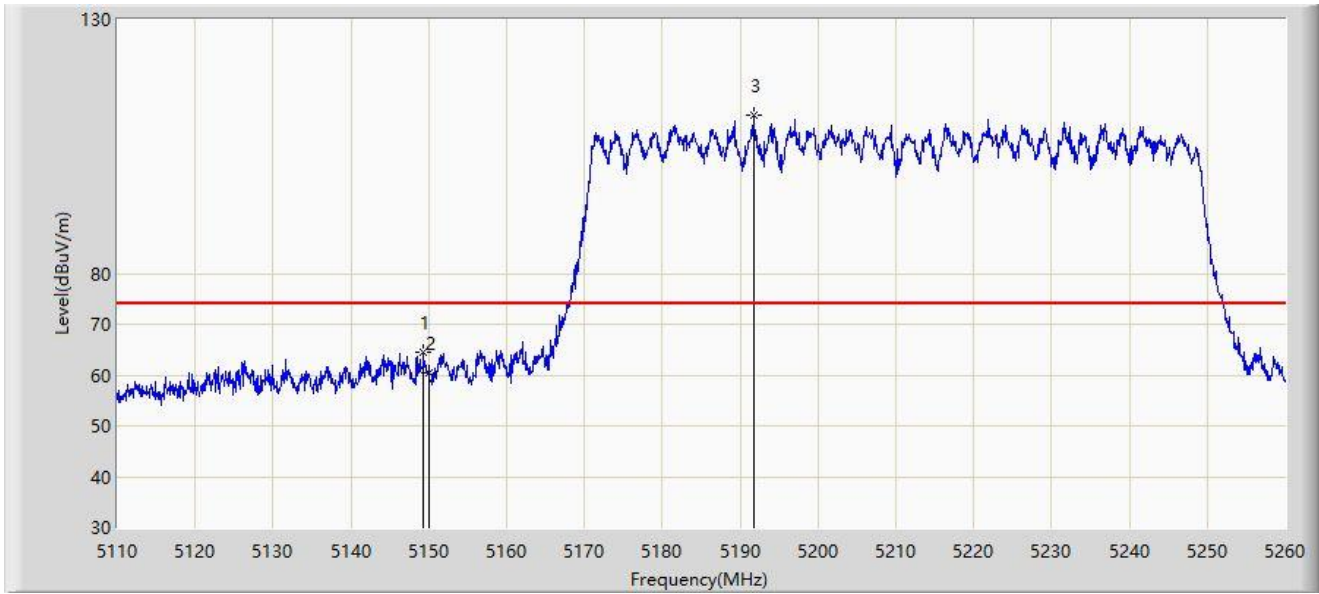


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.375	64.550	61.070	-9.450	74.000	3.480	PK
2		5150.000	60.453	56.971	-13.547	74.000	3.482	PK
3		5191.675	111.212	108.199	N/A	N/A	3.013	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

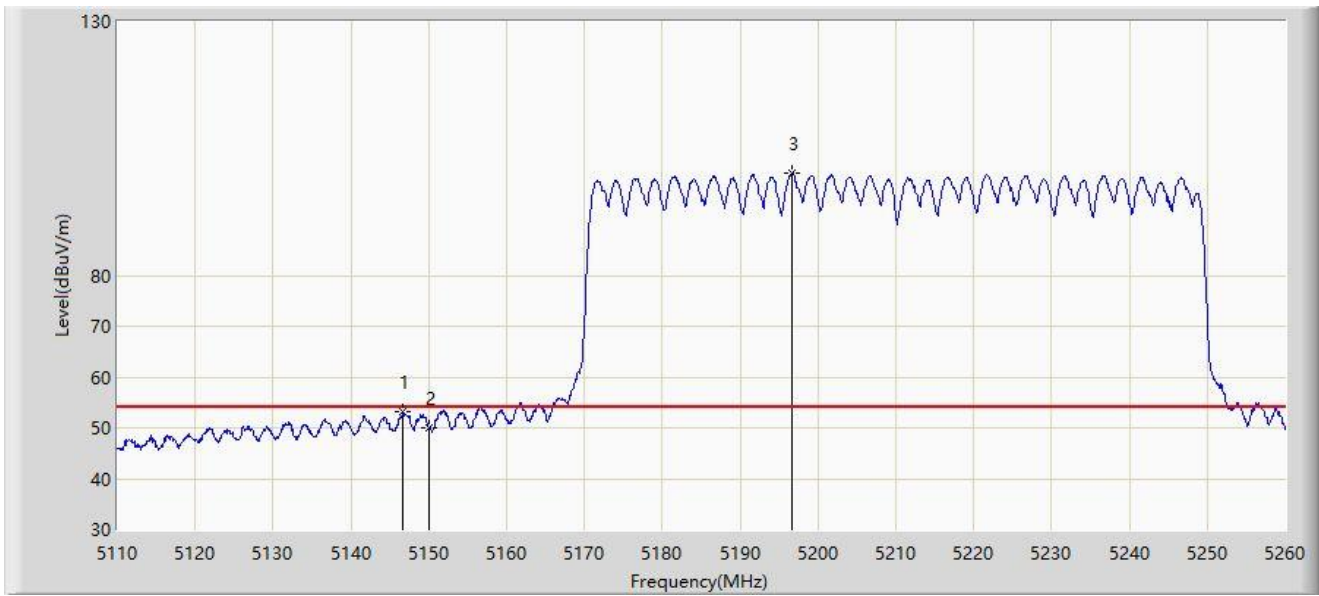


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.675	53.130	49.671	-0.870	54.000	3.458	AV
2		5150.000	50.028	46.546	-3.972	54.000	3.482	AV
3		5196.700	100.159	97.255	N/A	N/A	2.904	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHZ	

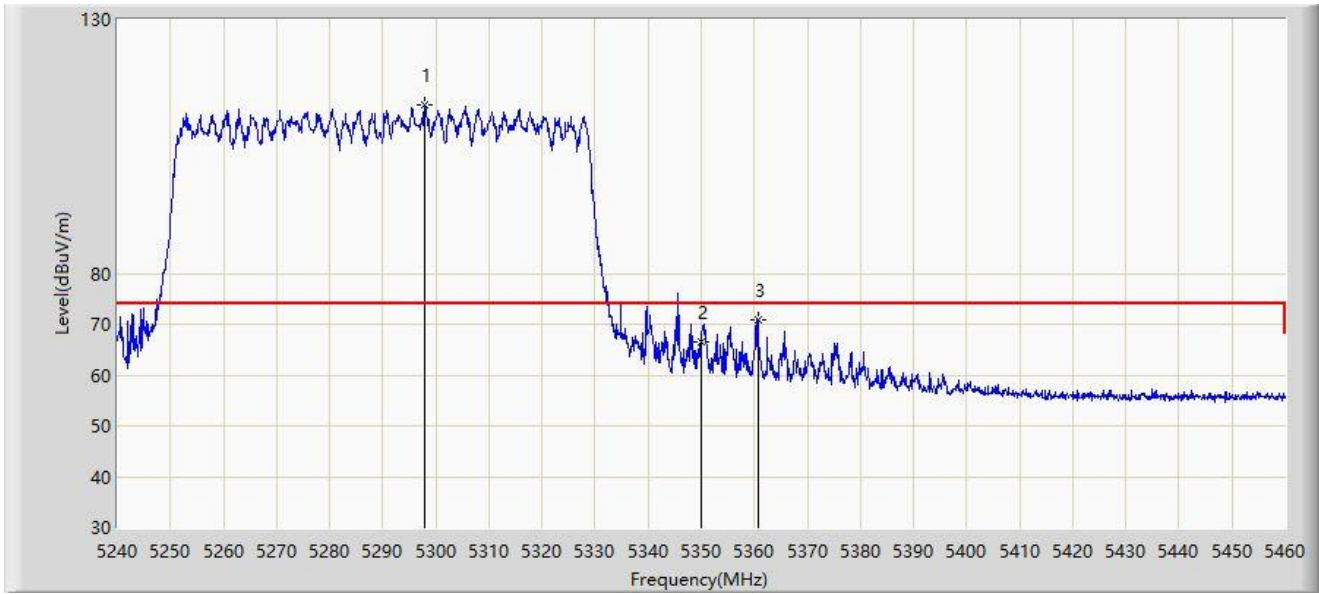


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5297.970	113.086	109.789	N/A	N/A	3.297	PK
2		5350.000	66.465	63.142	-7.535	74.000	3.323	PK
3	*	5360.670	70.929	67.696	-3.071	74.000	3.233	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHZ	

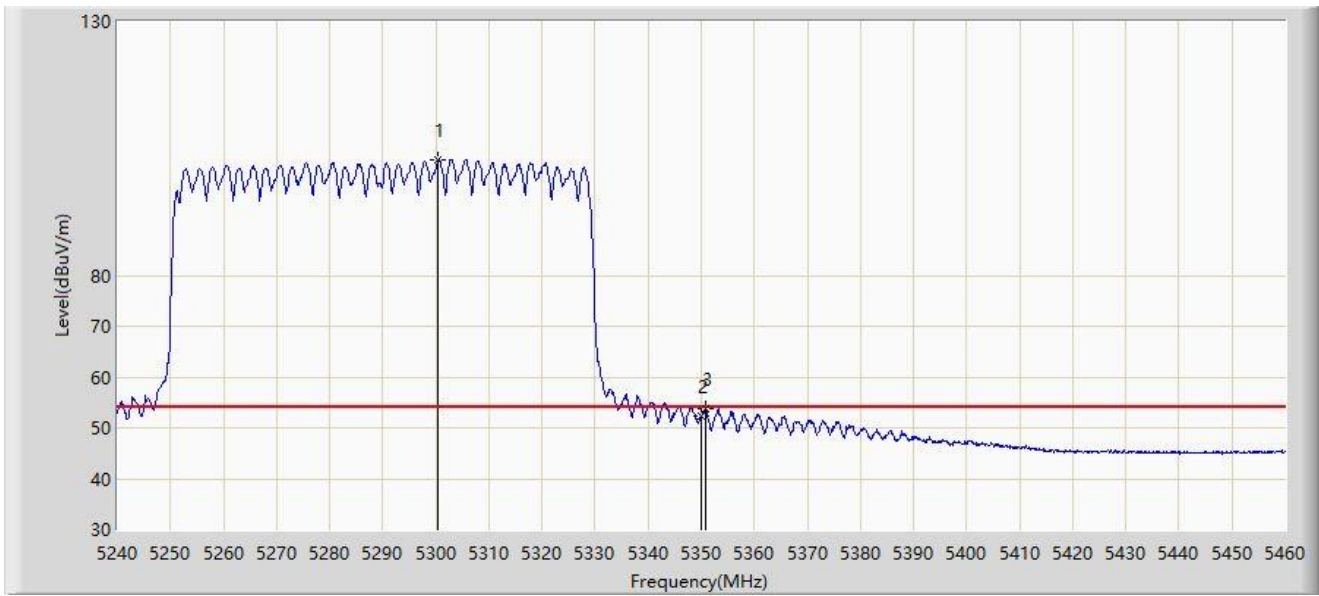


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5300.500	102.781	99.447	N/A	N/A	3.335	AV
2		5350.000	52.187	48.864	-1.813	54.000	3.323	AV
3	*	5350.770	53.801	50.498	-0.199	54.000	3.303	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHZ	

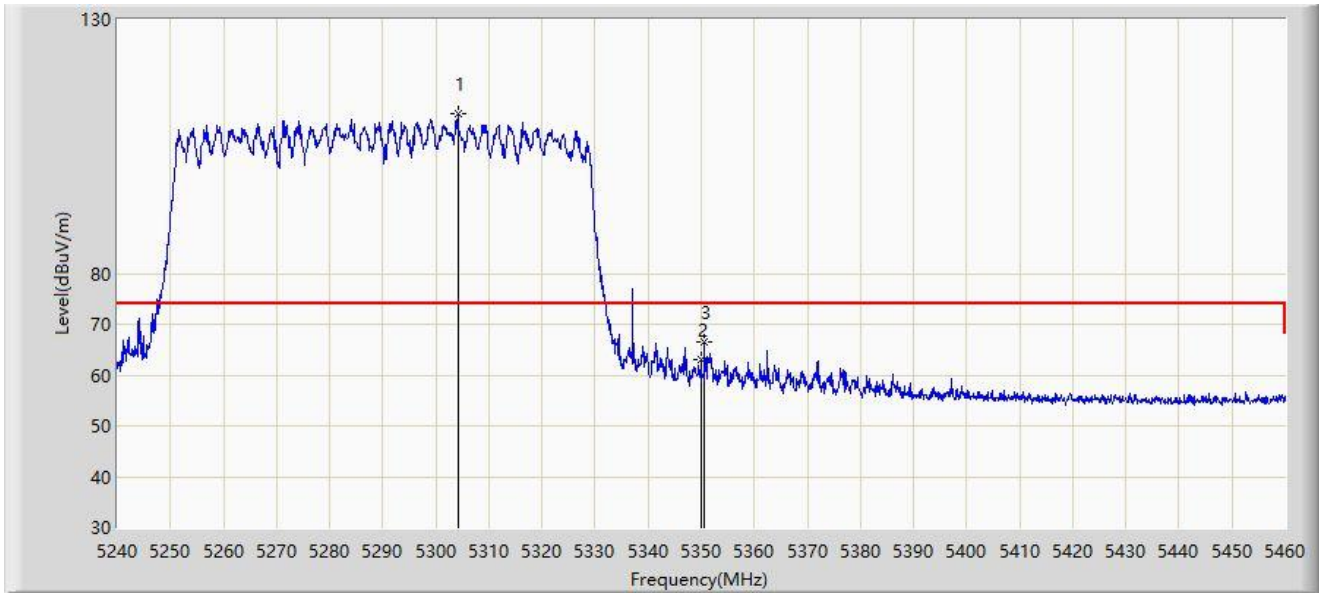


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5304.130	111.354	107.951	N/A	N/A	3.402	PK
2		5350.000	62.916	59.593	-11.084	74.000	3.323	PK
3	*	5350.660	66.515	63.209	-7.485	74.000	3.306	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHZ	

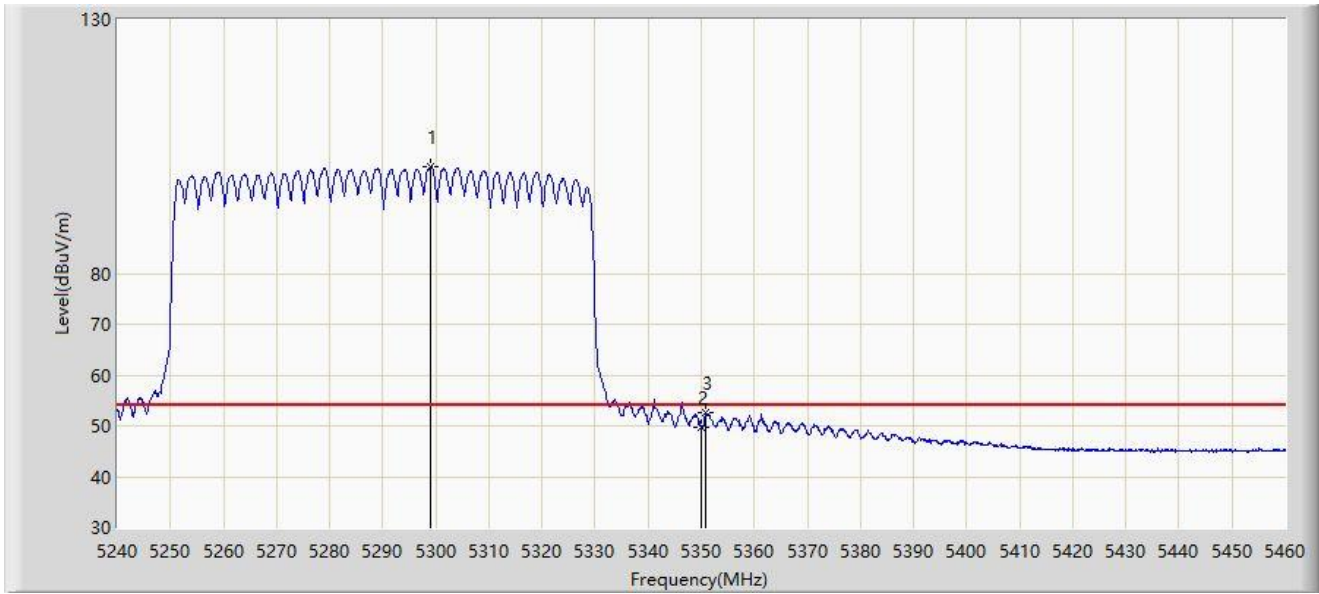


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5299.070	101.039	97.726	N/A	N/A	3.313	AV
2		5350.000	49.602	46.279	-4.398	54.000	3.323	AV
3	*	5350.770	52.464	49.161	-1.536	54.000	3.303	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHZ	

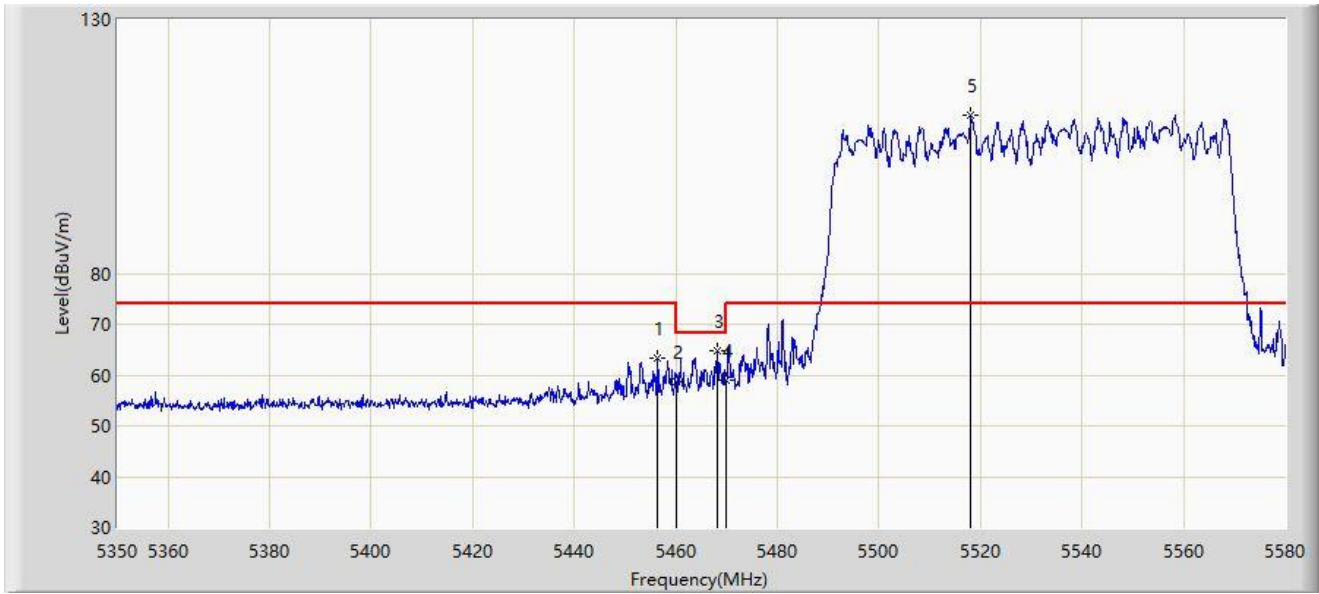


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.490	63.243	59.699	-10.757	74.000	3.543	PK
2		5460.000	58.634	55.024	-15.366	74.000	3.610	PK
3	*	5468.220	64.860	61.095	-3.340	68.200	3.764	PK
4		5470.000	59.082	55.284	-9.118	68.200	3.797	PK
5		5518.130	111.095	107.674	N/A	N/A	3.421	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHZ	

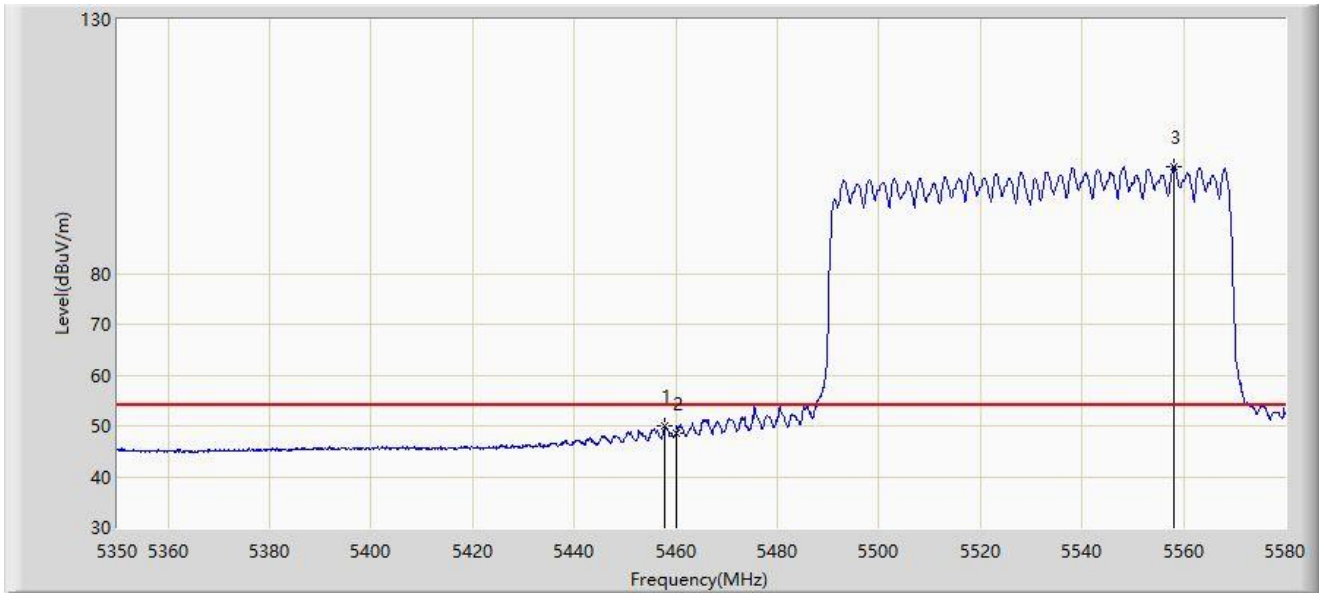


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5457.755	49.906	46.338	-4.094	54.000	3.568	AV
2		5460.000	48.429	44.819	-5.571	54.000	3.610	AV
3		5558.035	100.966	96.938	N/A	N/A	4.028	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHZ	

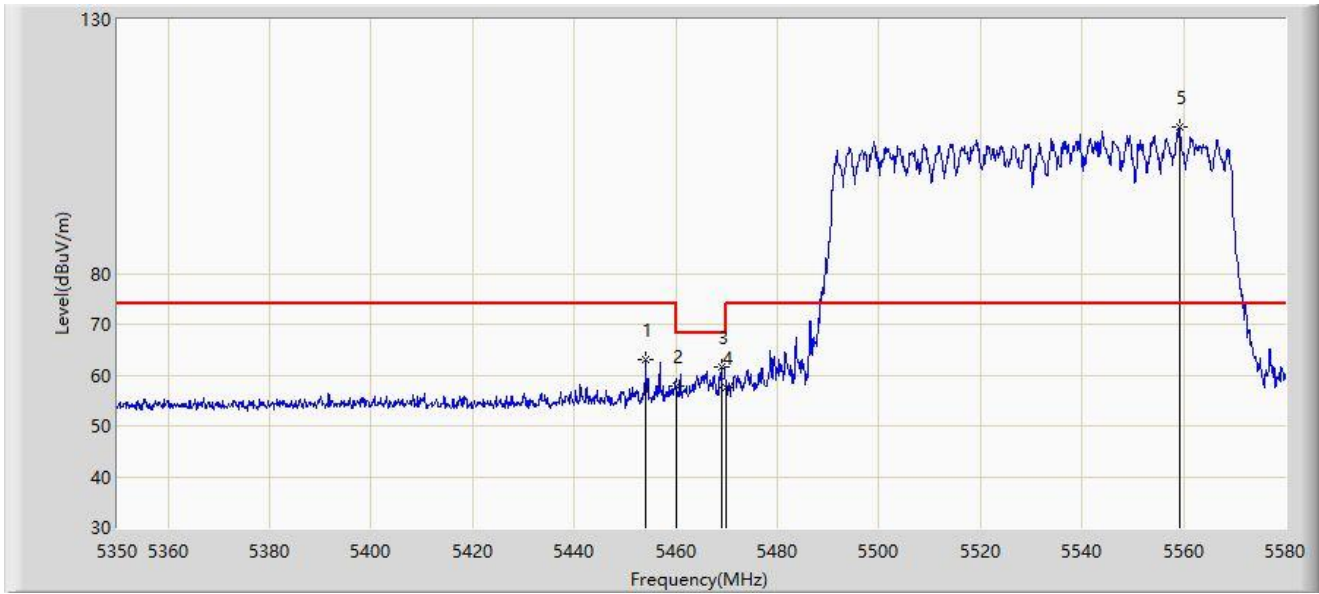


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5454.075	63.126	59.631	-10.874	74.000	3.495	PK
2		5460.000	57.910	54.300	-16.090	74.000	3.610	PK
3	*	5468.910	61.460	57.683	-6.740	68.200	3.778	PK
4		5470.000	57.503	53.705	-10.697	68.200	3.797	PK
5		5559.185	108.957	104.933	N/A	N/A	4.024	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHZ	

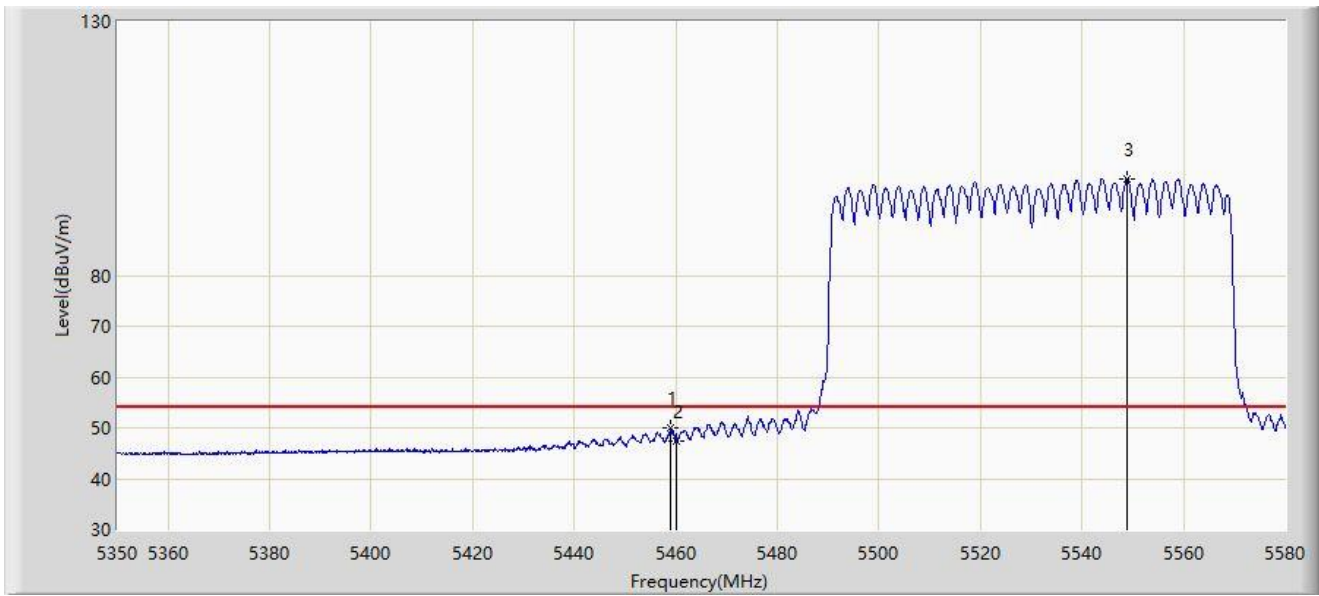


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.020	50.087	46.495	-3.913	54.000	3.592	AV
2		5460.000	47.378	43.768	-6.622	54.000	3.610	AV
3		5548.950	99.126	95.193	N/A	N/A	3.933	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

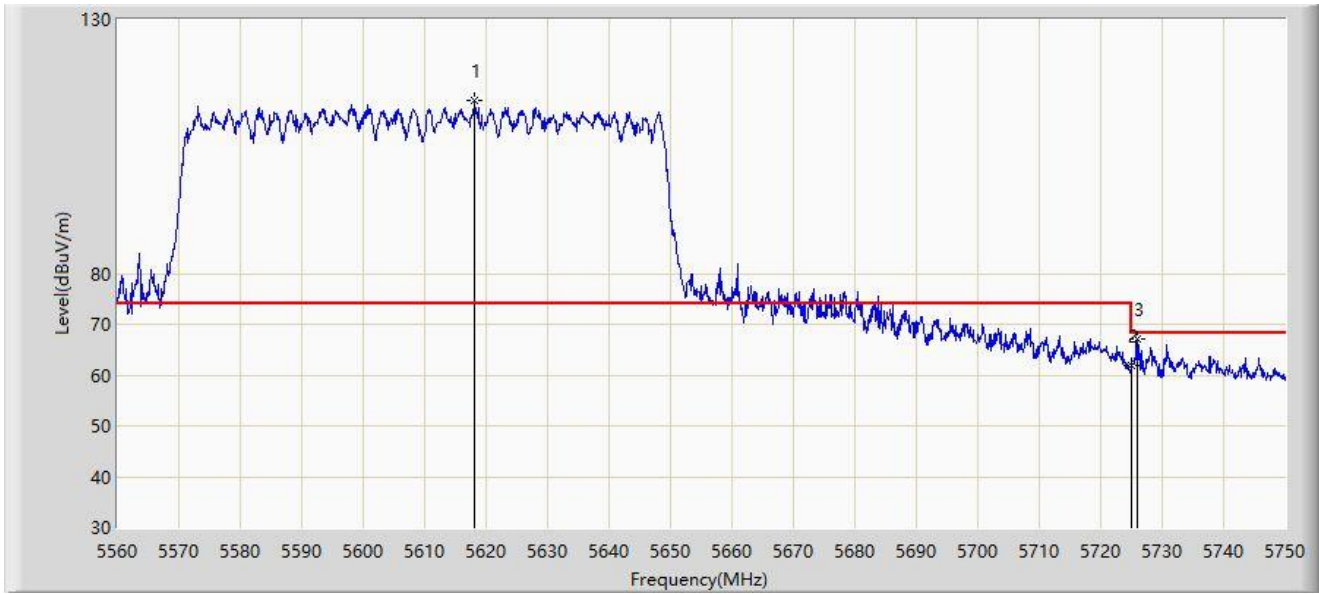


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5618.140	113.925	109.650	N/A	N/A	4.275	PK
2		5725.000	61.798	56.664	-6.402	68.200	5.134	PK
3	*	5726.060	67.082	61.940	-1.118	68.200	5.142	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

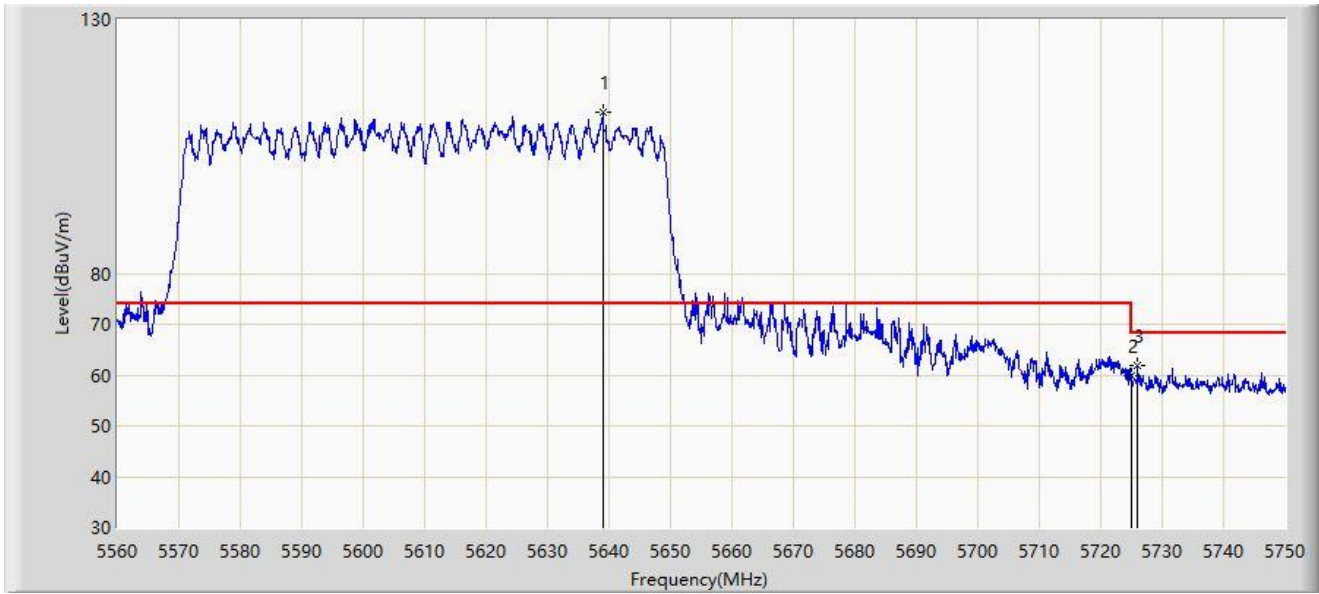


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5639.040	111.667	107.103	N/A	N/A	4.565	PK
2		5725.000	59.961	54.827	-8.239	68.200	5.134	PK
3	*	5725.965	61.897	56.755	-6.303	68.200	5.143	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

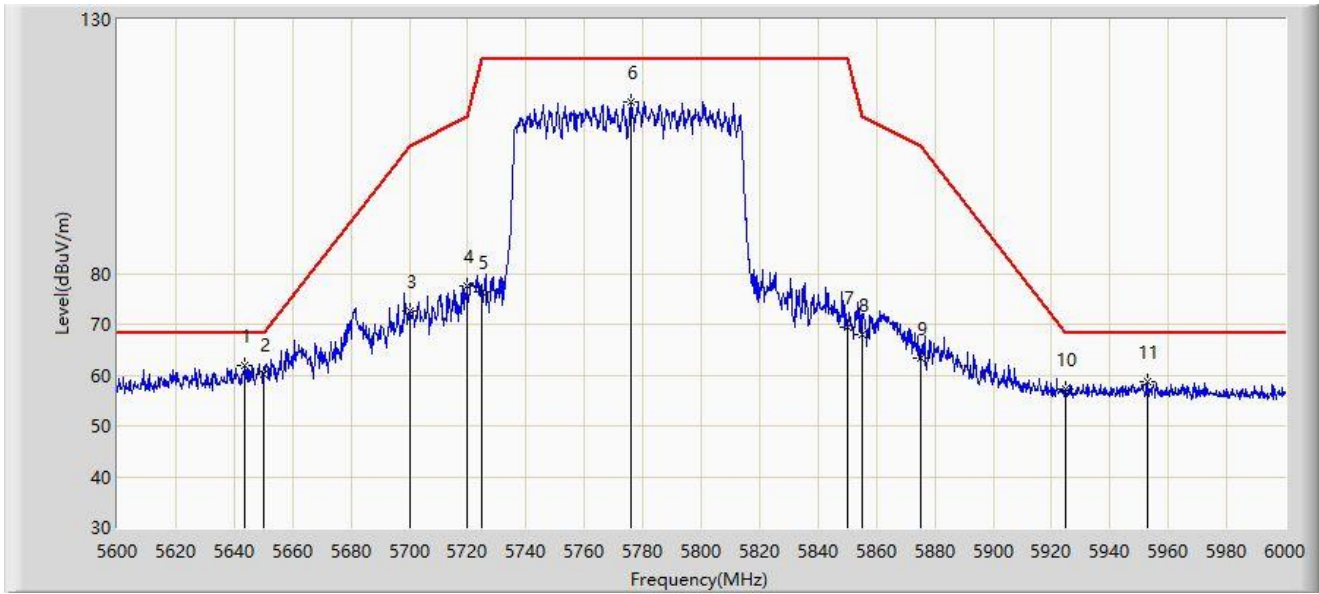


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5643.600	61.913	57.759	-6.287	68.200	4.154	PK
2		5650.000	60.185	56.062	-8.015	68.200	4.122	PK
3		5700.000	72.499	68.062	-32.701	105.200	4.437	PK
4		5720.000	77.633	72.969	-33.167	110.800	4.663	PK
5		5725.000	76.274	71.571	-45.926	122.200	4.703	PK
6		5776.000	113.834	108.966	N/A	N/A	4.868	PK
7		5850.000	69.319	64.336	-52.881	122.200	4.984	PK
8		5855.000	68.048	63.010	-42.752	110.800	5.038	PK
9		5875.000	63.465	58.334	-41.735	105.200	5.131	PK
10		5925.000	57.190	51.955	-11.010	68.200	5.236	PK
11		5953.000	58.573	53.205	-9.627	68.200	5.368	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

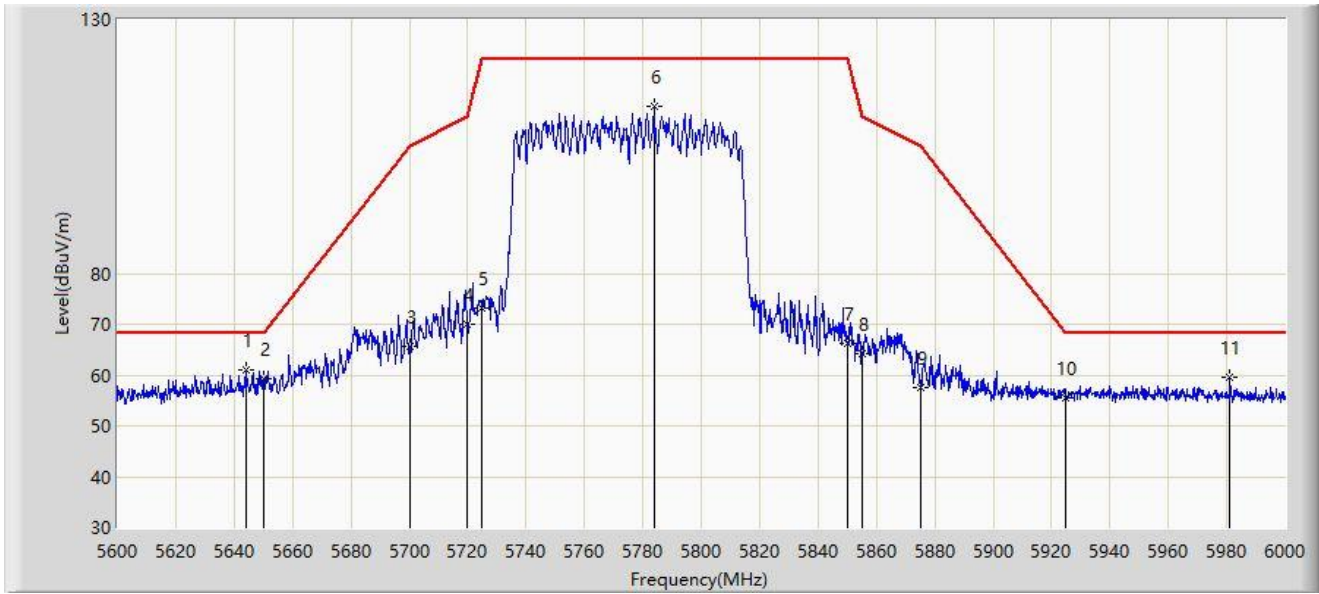


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5644.200	60.956	56.805	-7.244	68.200	4.151	PK
2		5650.000	59.237	55.114	-8.963	68.200	4.122	PK
3		5700.000	65.764	61.327	-39.436	105.200	4.437	PK
4		5720.000	70.085	65.421	-40.715	110.800	4.663	PK
5		5725.000	73.118	68.415	-49.082	122.200	4.703	PK
6		5783.800	112.967	108.013	N/A	N/A	4.955	PK
7		5850.000	66.291	61.308	-55.909	122.200	4.984	PK
8		5855.000	64.193	59.155	-46.607	110.800	5.038	PK
9		5875.000	57.600	52.469	-47.600	105.200	5.131	PK
10		5925.000	55.379	50.144	-12.821	68.200	5.236	PK
11		5981.200	59.519	54.285	-8.681	68.200	5.233	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

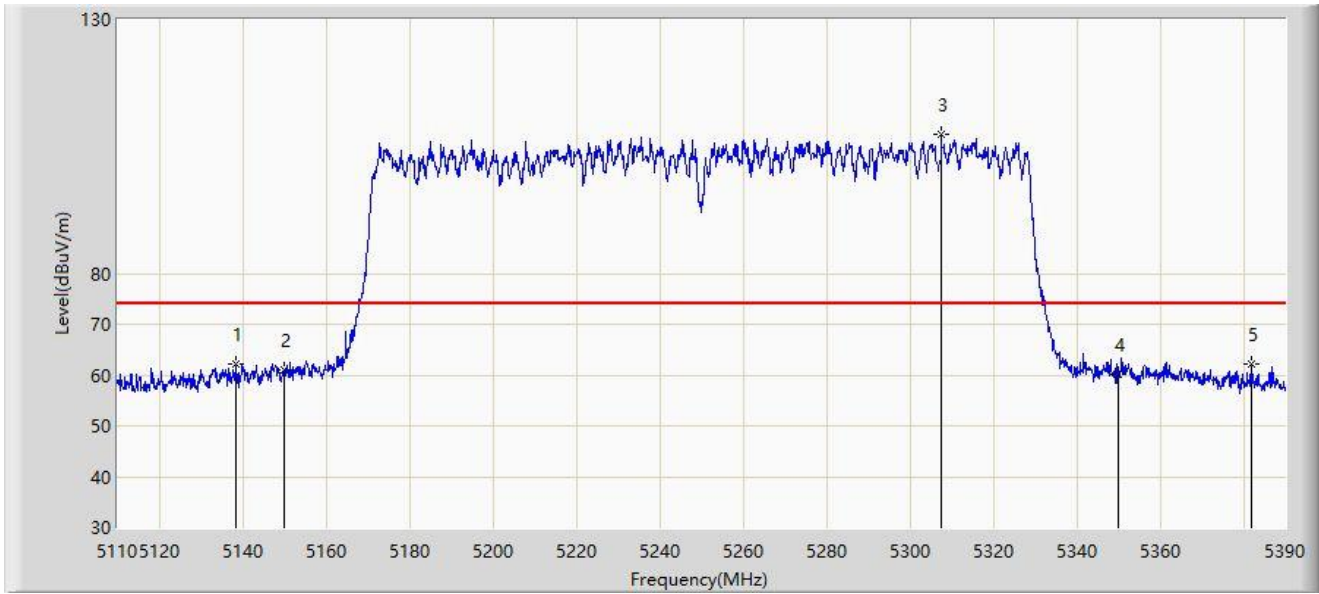


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5138.560	62.063	58.707	-11.937	74.000	3.357	PK
2		5150.000	60.911	57.429	-13.089	74.000	3.482	PK
3		5307.540	107.517	104.679	N/A	N/A	2.837	PK
4		5350.000	60.076	57.256	-13.924	74.000	2.820	PK
5	*	5382.020	62.165	59.051	-11.835	74.000	3.114	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

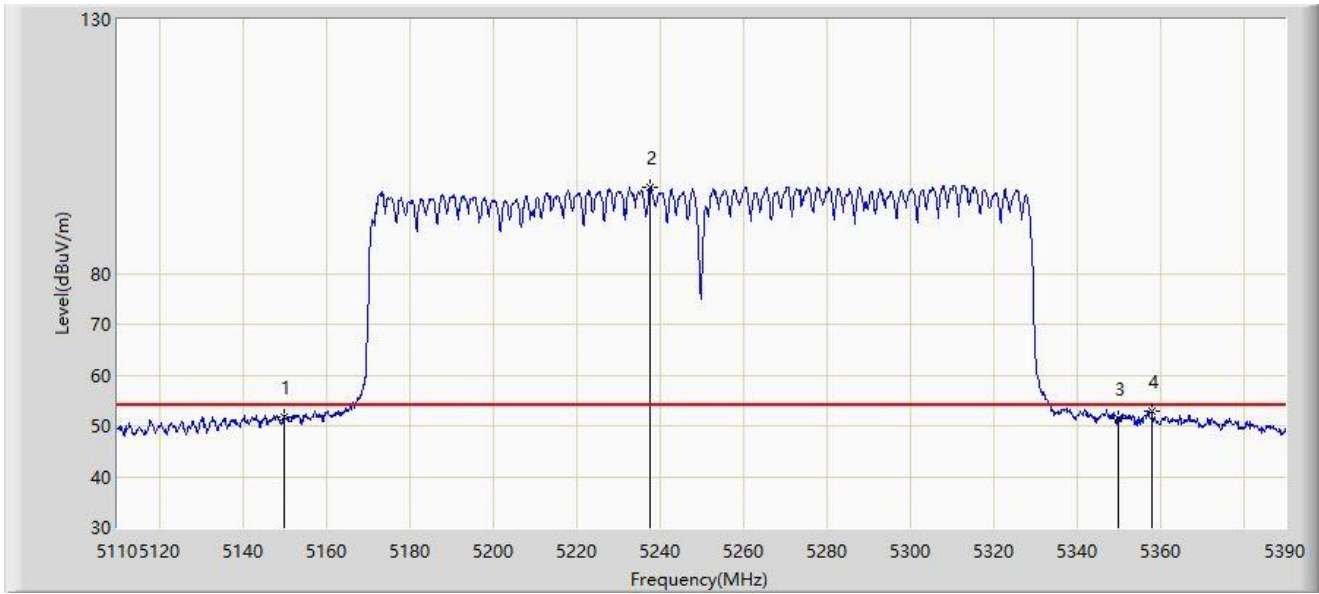


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5150.000	51.821	48.339	-2.179	54.000	3.482	AV
2		5237.820	96.950	93.730	N/A	N/A	3.219	AV
3		5350.000	51.512	48.692	-2.488	54.000	2.820	AV
4	*	5358.080	52.862	50.049	-1.138	54.000	2.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

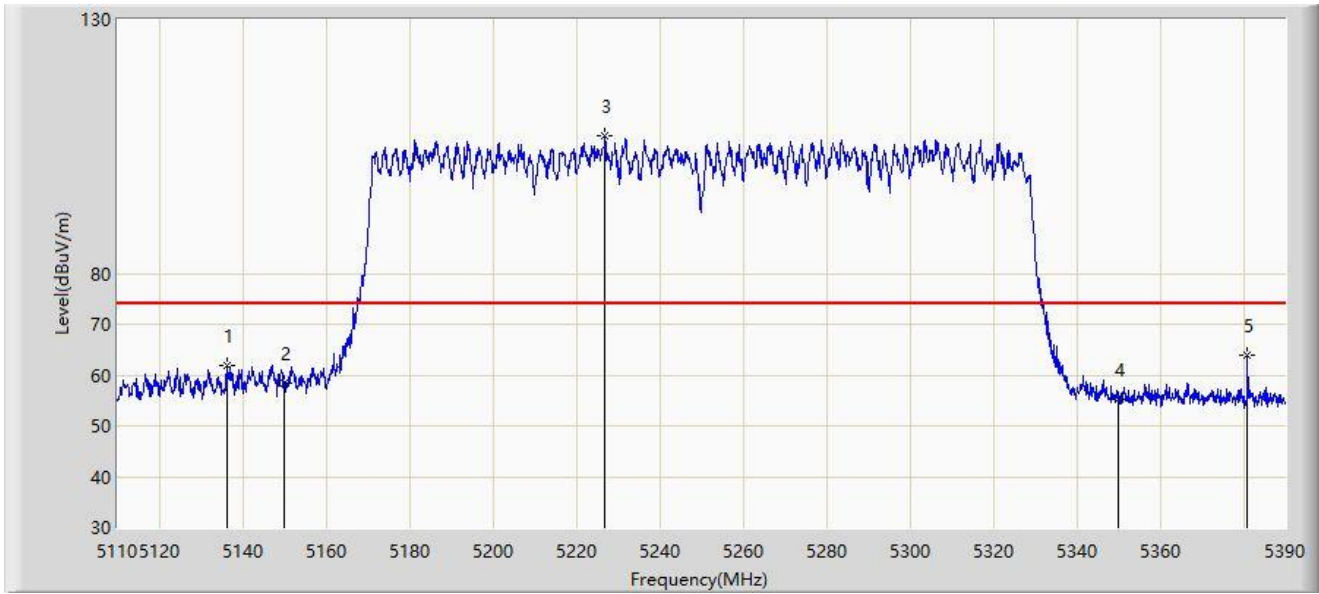


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5136.460	61.746	58.416	-12.254	74.000	3.329	PK
2		5150.000	58.326	54.844	-15.674	74.000	3.482	PK
3		5226.900	107.233	104.124	N/A	N/A	3.109	PK
4		5350.000	55.127	52.307	-18.873	74.000	2.820	PK
5	*	5381.040	63.870	60.775	-10.130	74.000	3.096	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-06
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

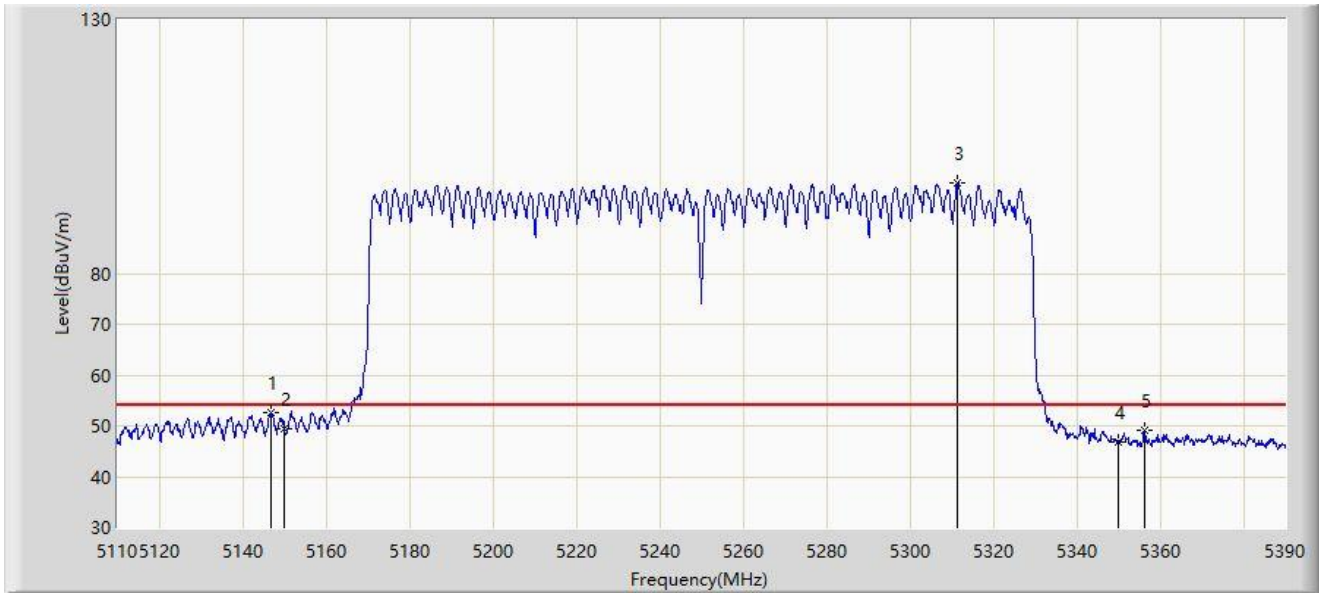


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.820	52.641	49.180	-1.359	54.000	3.460	AV
2		5150.000	49.380	45.898	-4.620	54.000	3.482	AV
3		5311.320	97.945	95.048	N/A	N/A	2.897	AV
4		5350.000	46.898	44.078	-7.102	54.000	2.820	AV
5		5356.260	49.035	46.230	-4.965	54.000	2.805	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

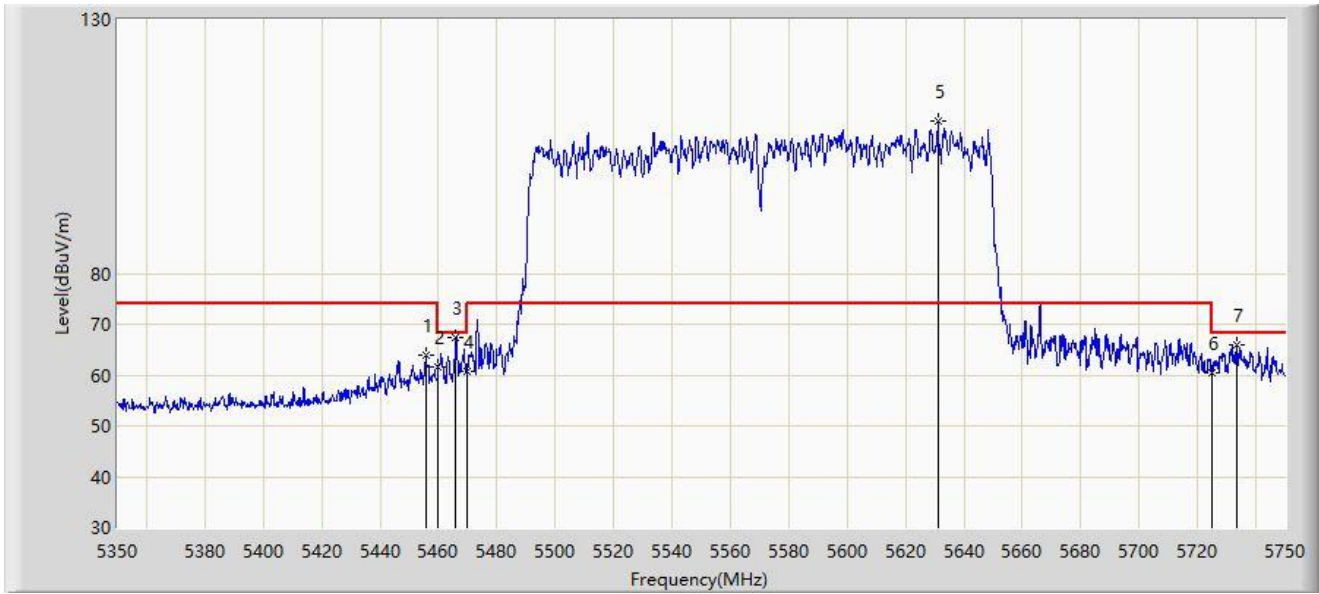


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5455.600	63.870	60.344	-10.130	74.000	3.526	PK
2		5460.000	61.614	58.004	-12.386	74.000	3.610	PK
3	*	5466.000	67.459	63.736	-0.741	68.200	3.723	PK
4		5470.000	60.611	56.813	-7.589	68.200	3.797	PK
5		5631.000	109.868	105.380	N/A	N/A	4.488	PK
6		5725.000	60.548	55.414	-7.652	68.200	5.134	PK
7		5733.400	65.996	60.934	-2.204	68.200	5.063	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

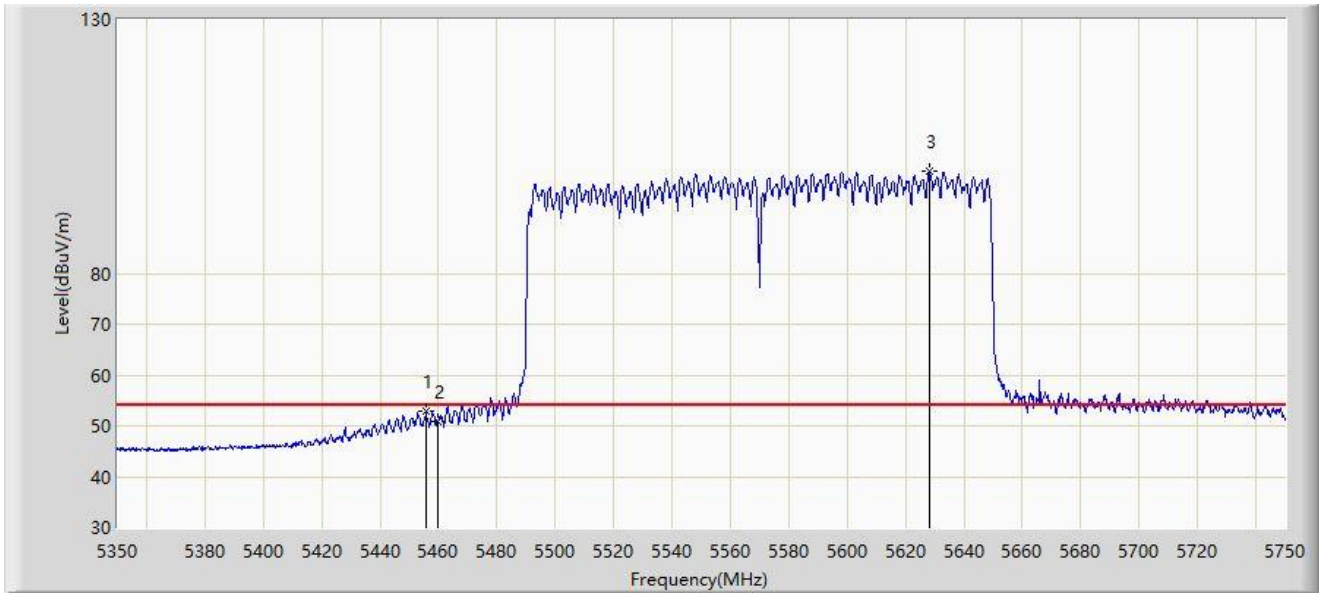


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5455.800	53.019	49.489	-0.981	54.000	3.530	AV
2		5460.000	50.736	47.126	-3.264	54.000	3.610	AV
3		5628.000	100.068	95.608	N/A	N/A	4.460	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

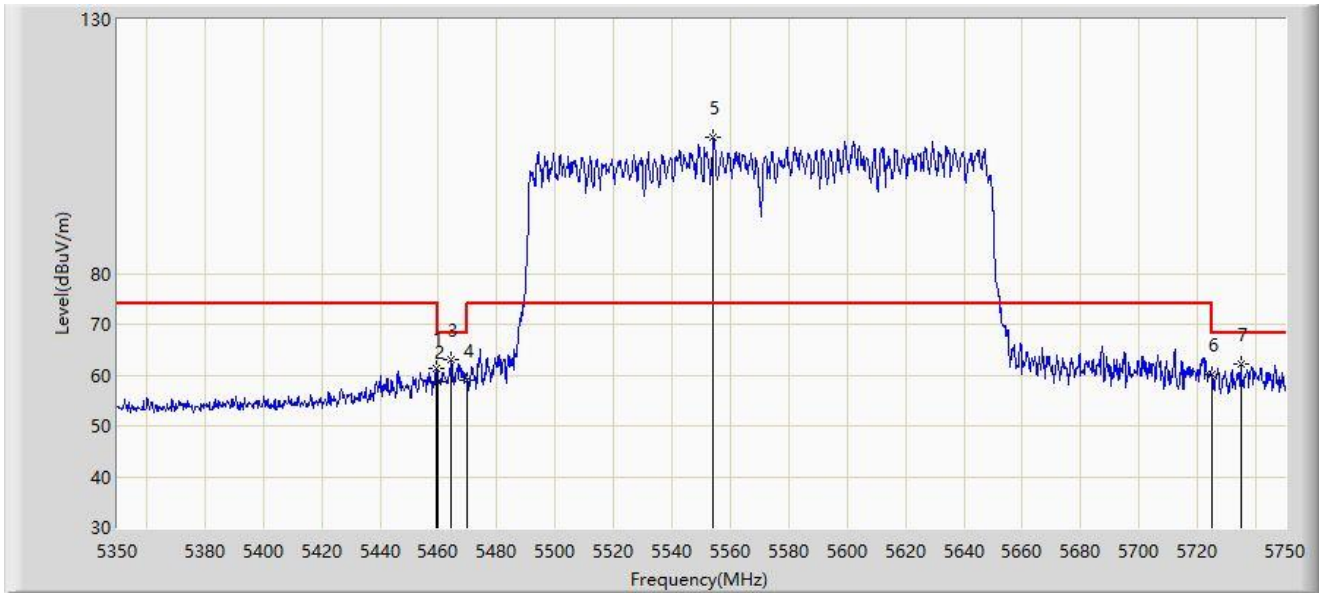


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5459.400	61.285	57.686	-12.715	74.000	3.599	PK
2		5460.000	58.622	55.012	-15.378	74.000	3.610	PK
3	*	5464.400	62.922	59.229	-5.278	68.200	3.693	PK
4		5470.000	59.019	55.221	-9.181	68.200	3.797	PK
5		5554.200	106.821	102.812	N/A	N/A	4.009	PK
6		5725.000	60.066	54.932	-8.134	68.200	5.134	PK
7		5735.000	62.107	57.062	-6.093	68.200	5.045	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

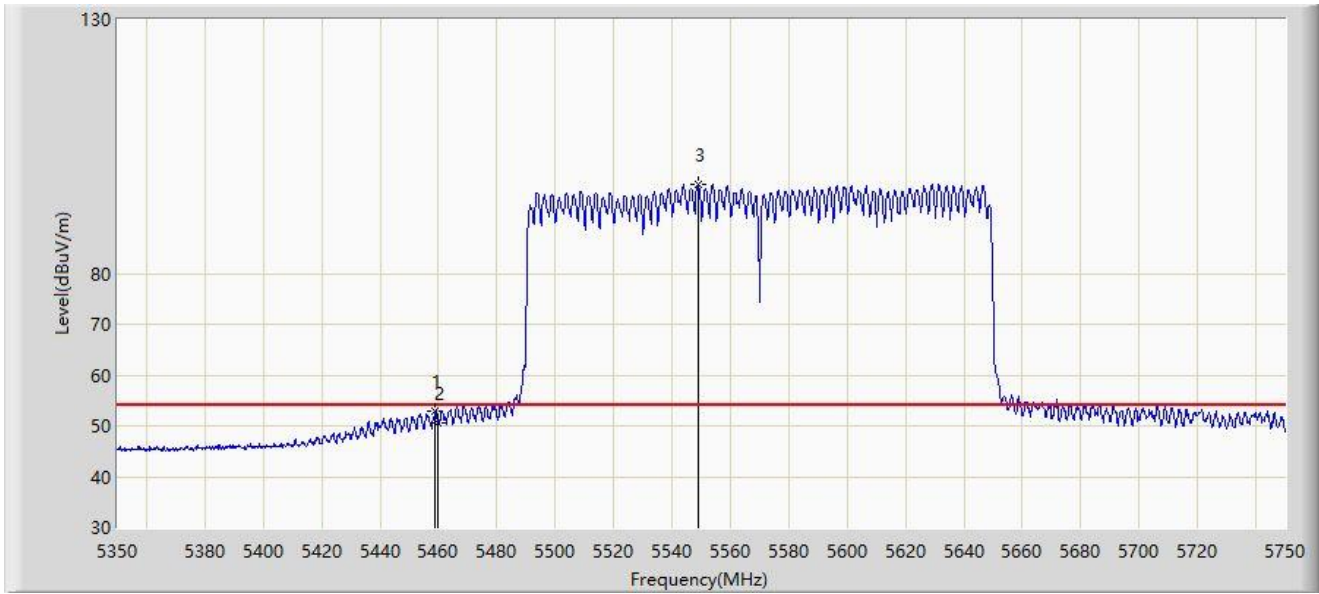


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.800	52.988	49.400	-1.012	54.000	3.588	AV
2		5460.000	50.687	47.077	-3.313	54.000	3.610	AV
3		5548.800	97.663	93.732	N/A	N/A	3.931	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	

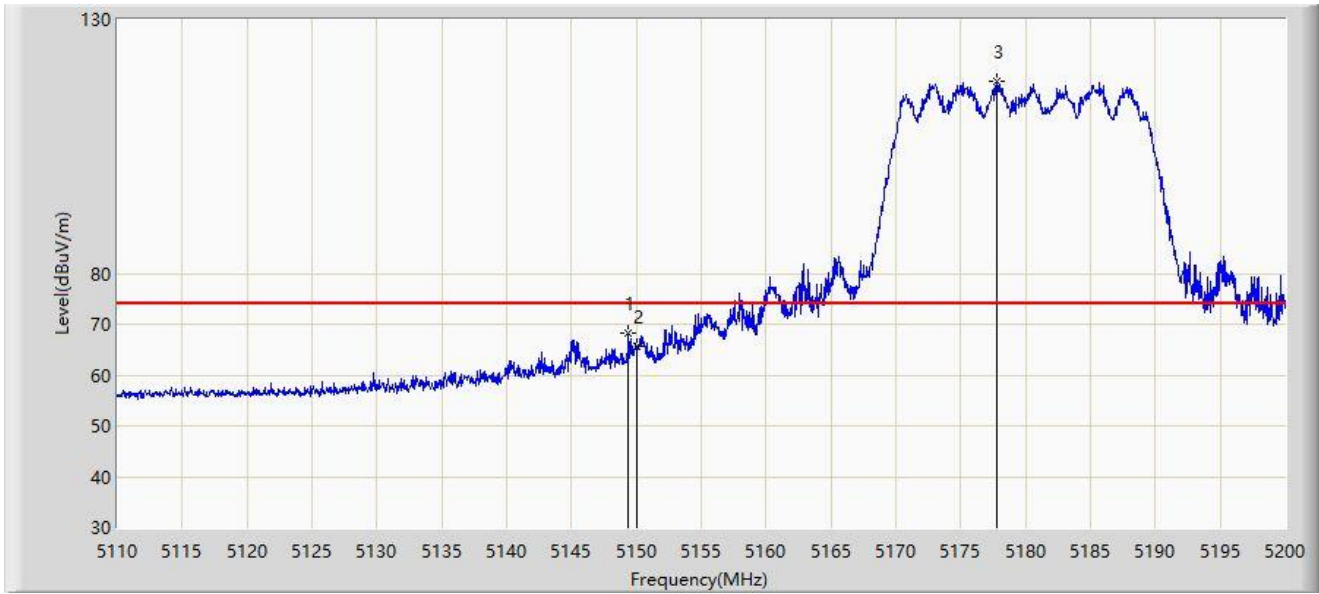


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.375	68.371	64.594	-5.629	74.000	3.778	PK
2		5150.000	65.660	61.880	-8.340	74.000	3.780	PK
3		5177.815	117.847	114.149	N/A	N/A	3.698	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	

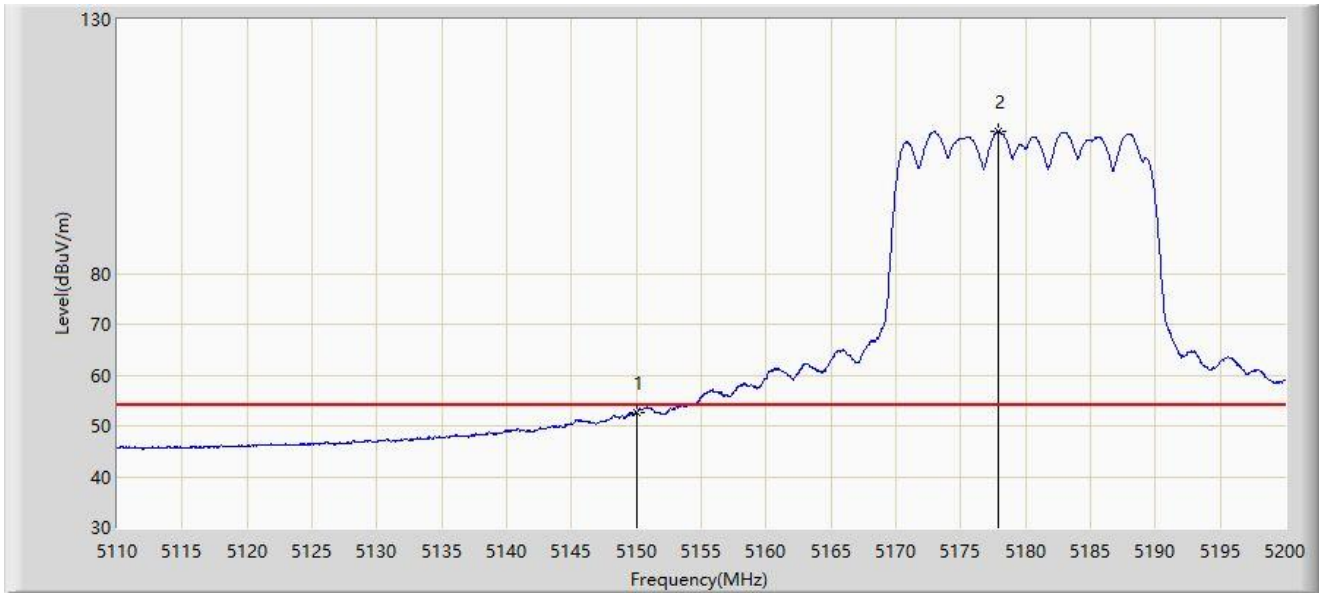


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	52.680	48.900	-1.320	54.000	3.780	AV
2		5177.905	108.112	104.415	N/A	N/A	3.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	

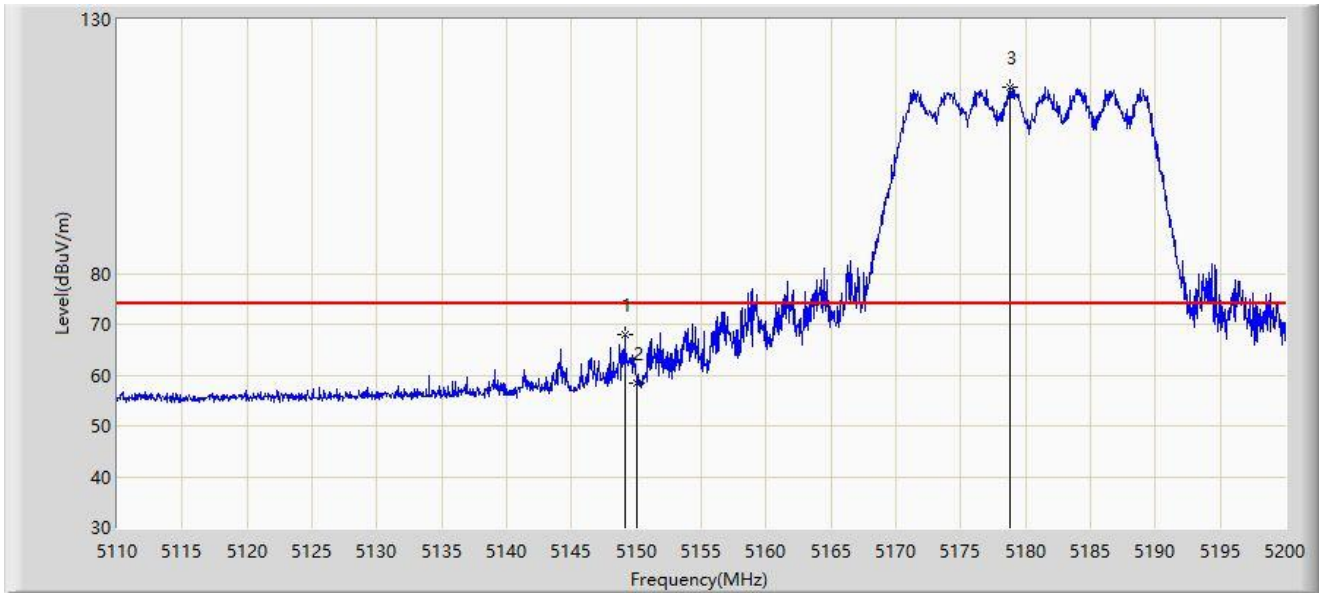


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.105	67.990	64.213	-6.010	74.000	3.776	PK
2		5150.000	58.548	54.768	-15.452	74.000	3.780	PK
3		5178.760	116.712	113.028	N/A	N/A	3.683	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	

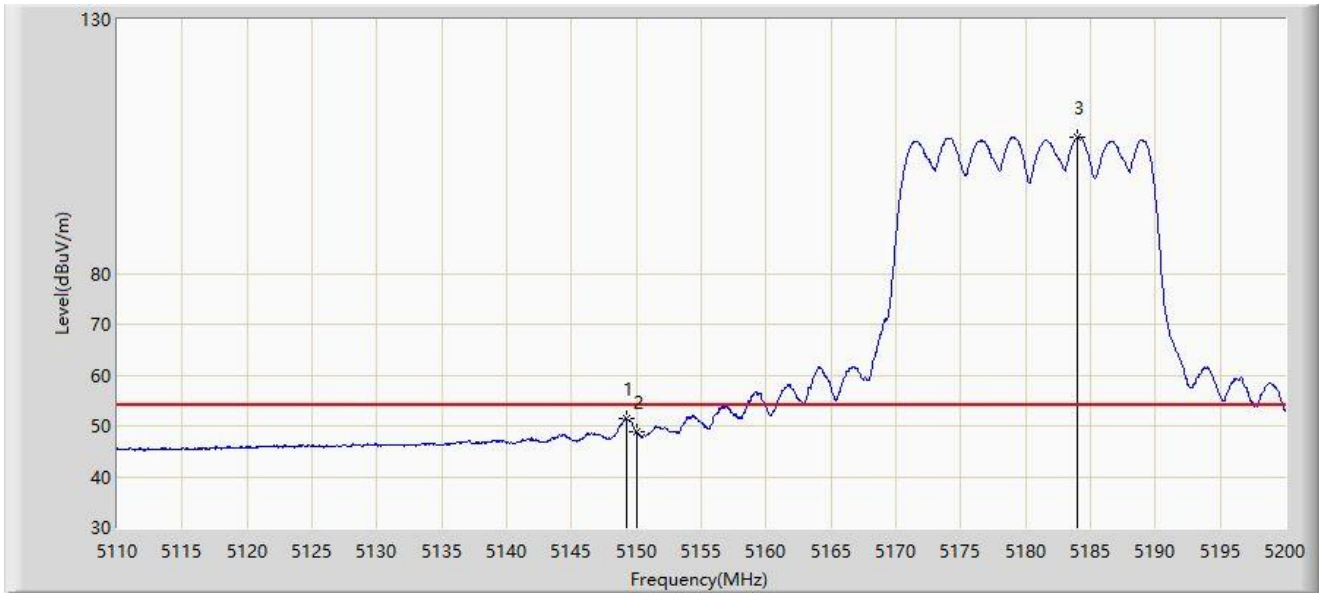


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.195	51.581	47.804	-2.419	54.000	3.777	AV
2		5150.000	48.839	45.059	-5.161	54.000	3.780	AV
3		5183.980	106.918	103.321	N/A	N/A	3.597	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHZ	

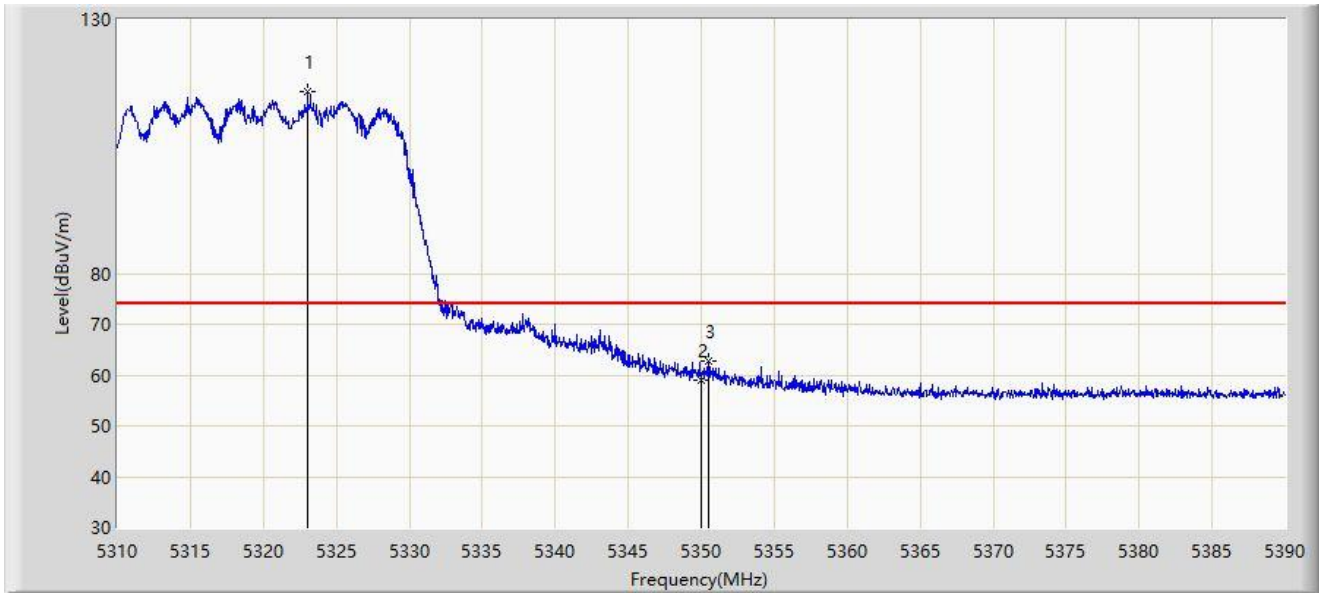


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5323.040	115.843	112.115	N/A	N/A	3.728	PK
2		5350.000	58.987	55.664	-15.013	74.000	3.323	PK
3	*	5350.480	62.887	59.576	-11.113	74.000	3.311	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHZ	

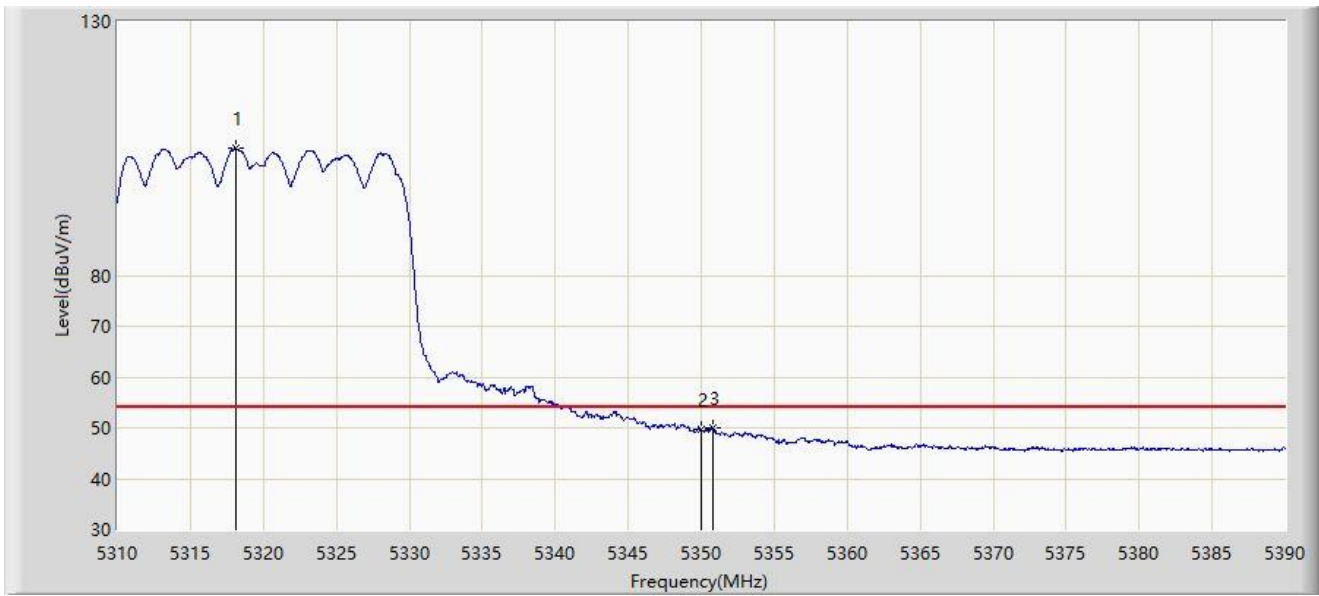


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.080	105.001	101.302	N/A	N/A	3.699	AV
2		5350.000	49.701	46.378	-4.299	54.000	3.323	AV
3	*	5350.800	49.951	46.649	-4.049	54.000	3.303	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHZ	

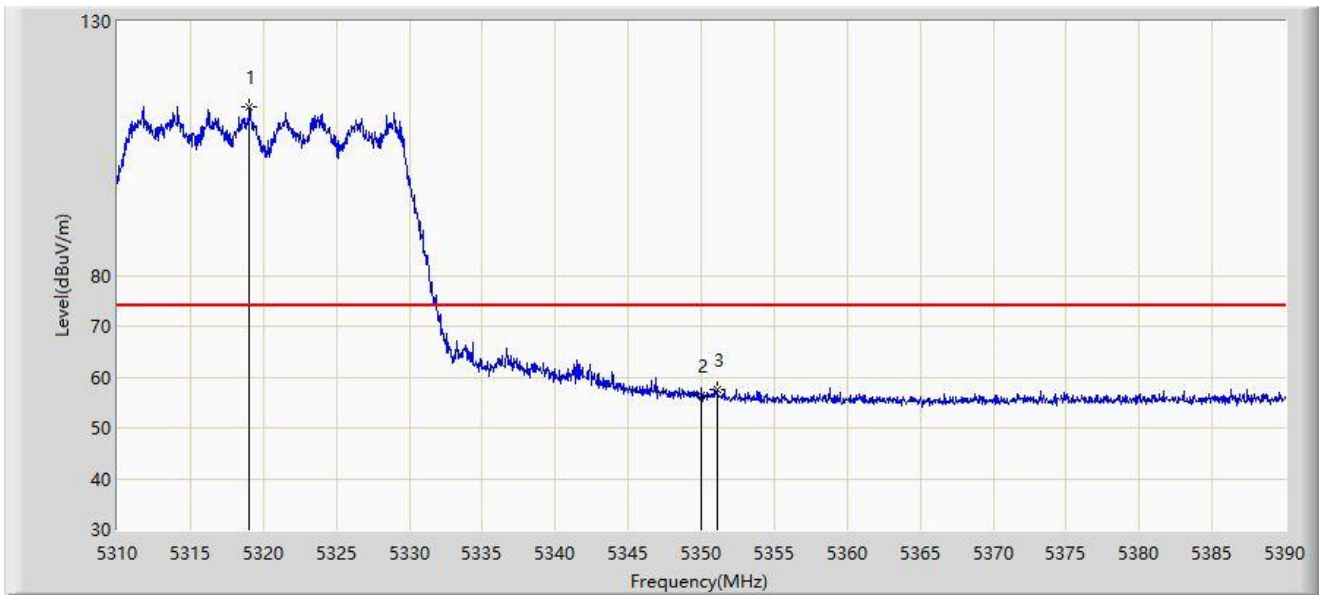


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.040	113.235	109.530	N/A	N/A	3.704	PK
2		5350.000	56.391	53.068	-17.609	74.000	3.323	PK
3	*	5351.080	57.588	54.293	-16.412	74.000	3.296	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHZ	

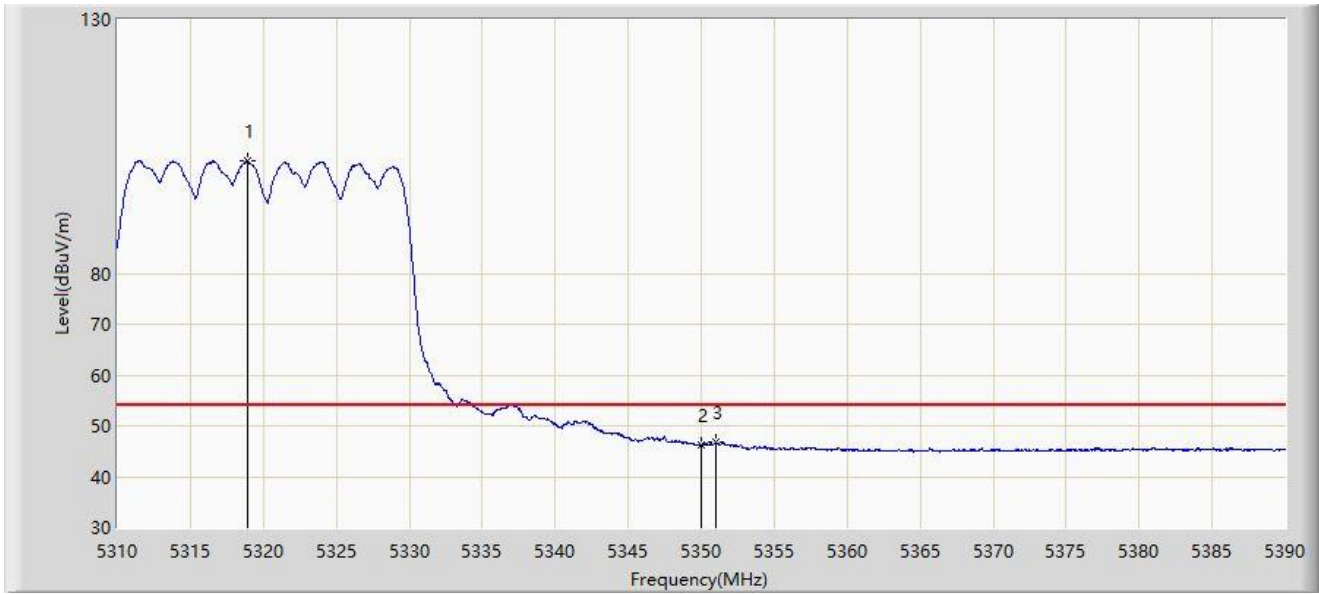


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.920	102.157	98.453	N/A	N/A	3.704	AV
2		5350.000	46.152	42.829	-7.848	54.000	3.323	AV
3	*	5351.000	46.670	43.373	-7.330	54.000	3.297	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHZ	

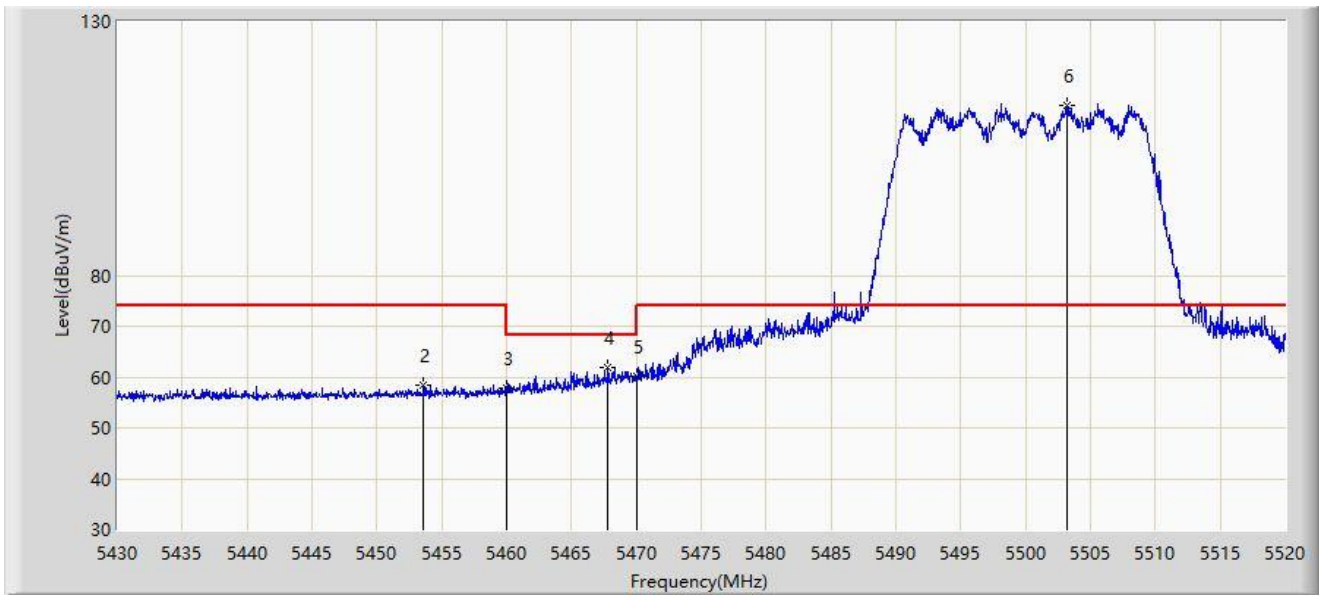


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5351.000	46.670	43.373	-27.330	74.000	3.297	PK
2		5453.580	58.478	54.984	-15.522	74.000	3.494	PK
3		5460.000	57.741	54.131	-16.259	74.000	3.610	PK
4	*	5467.800	61.802	58.045	-6.398	68.200	3.757	PK
5		5470.000	60.218	56.420	-7.982	68.200	3.797	PK
6		5503.170	113.623	110.038	N/A	N/A	3.585	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHZ	

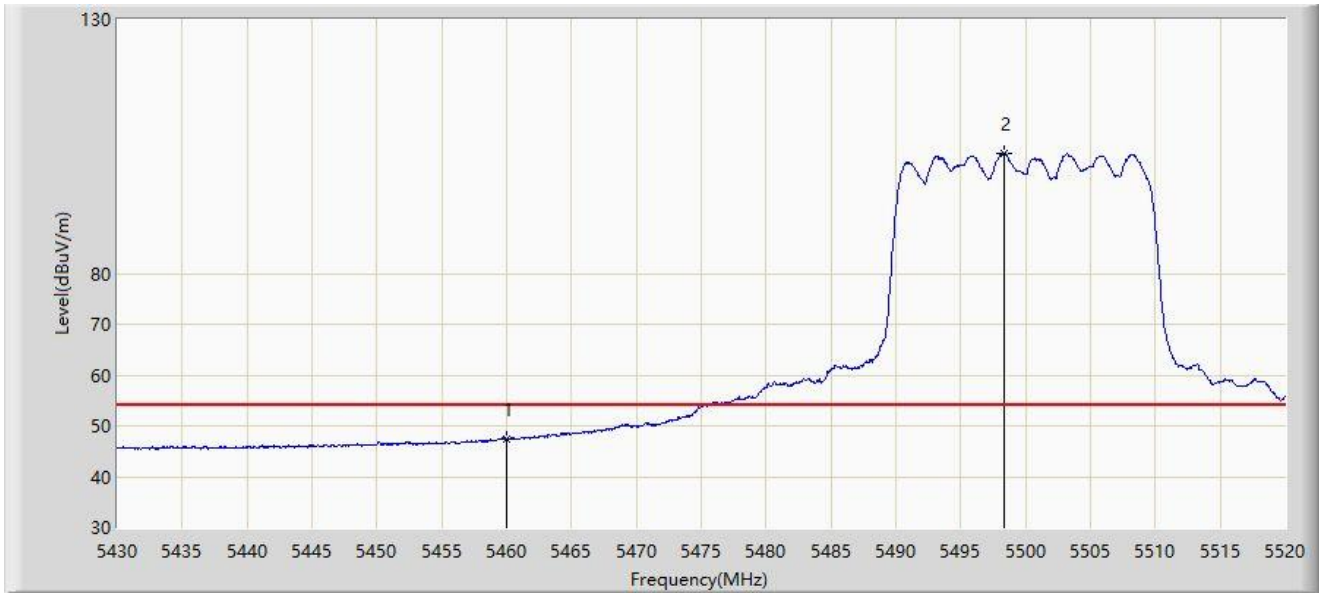


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	47.383	43.773	-6.617	54.000	3.610	AV
2		5498.400	103.533	99.891	N/A	N/A	3.642	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHZ	

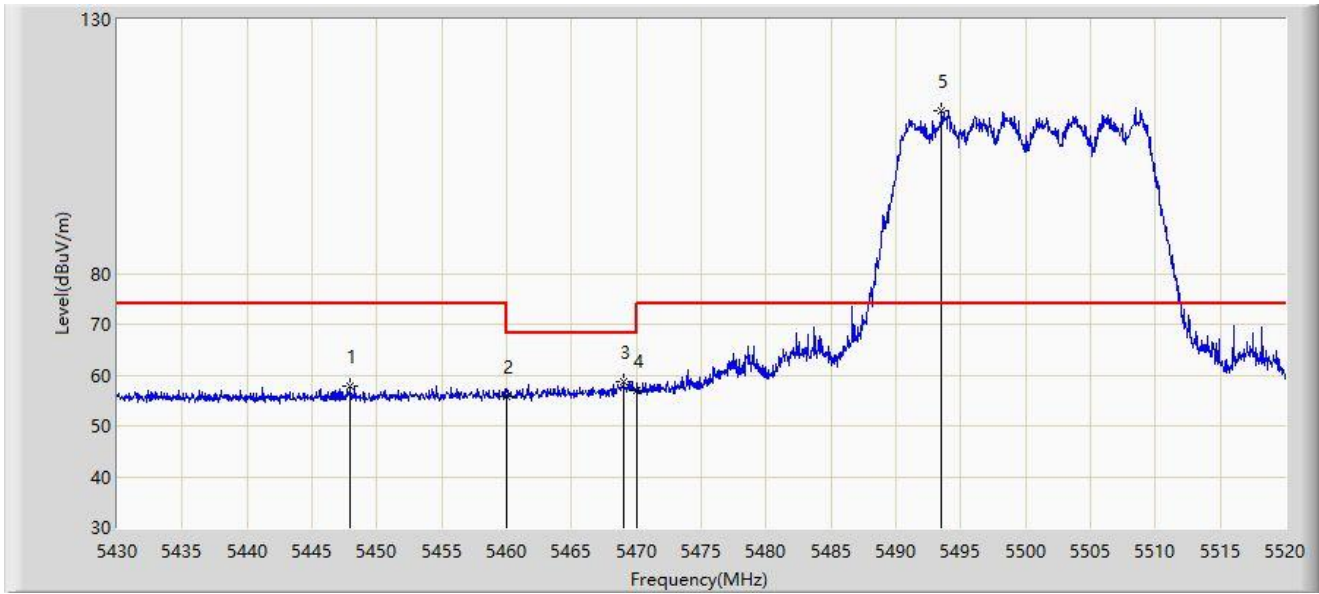


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5447.955	57.892	54.382	-16.108	74.000	3.511	PK
2		5460.000	55.940	52.330	-18.060	74.000	3.610	PK
3	*	5469.015	58.797	55.018	-9.403	68.200	3.780	PK
4		5470.000	56.996	53.198	-11.204	68.200	3.797	PK
5		5493.495	112.166	108.464	N/A	N/A	3.701	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHZ	

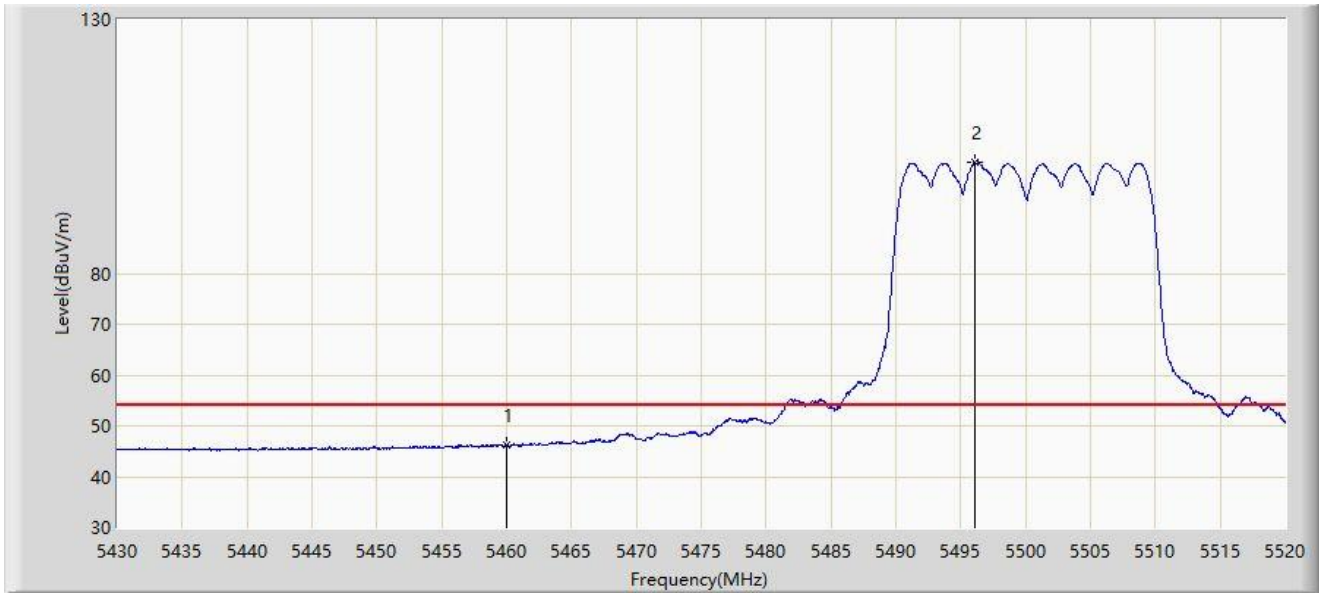


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	46.088	42.478	-7.912	54.000	3.610	AV
2		5496.105	101.967	98.297	N/A	N/A	3.671	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5700MHz	

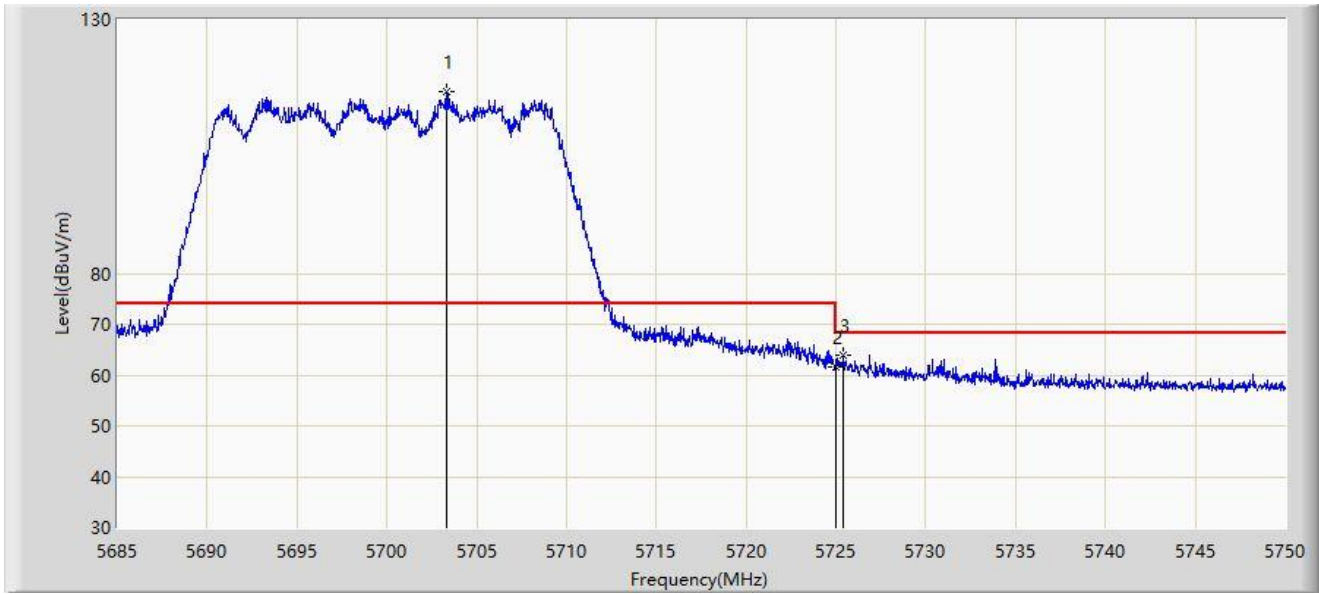


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5703.330	115.865	110.952	N/A	N/A	4.913	PK
2		5725.000	61.678	56.544	-6.522	68.200	5.134	PK
3	*	5725.430	63.865	58.727	-4.335	68.200	5.138	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-14
Limit: FCC_5G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5700MHz	

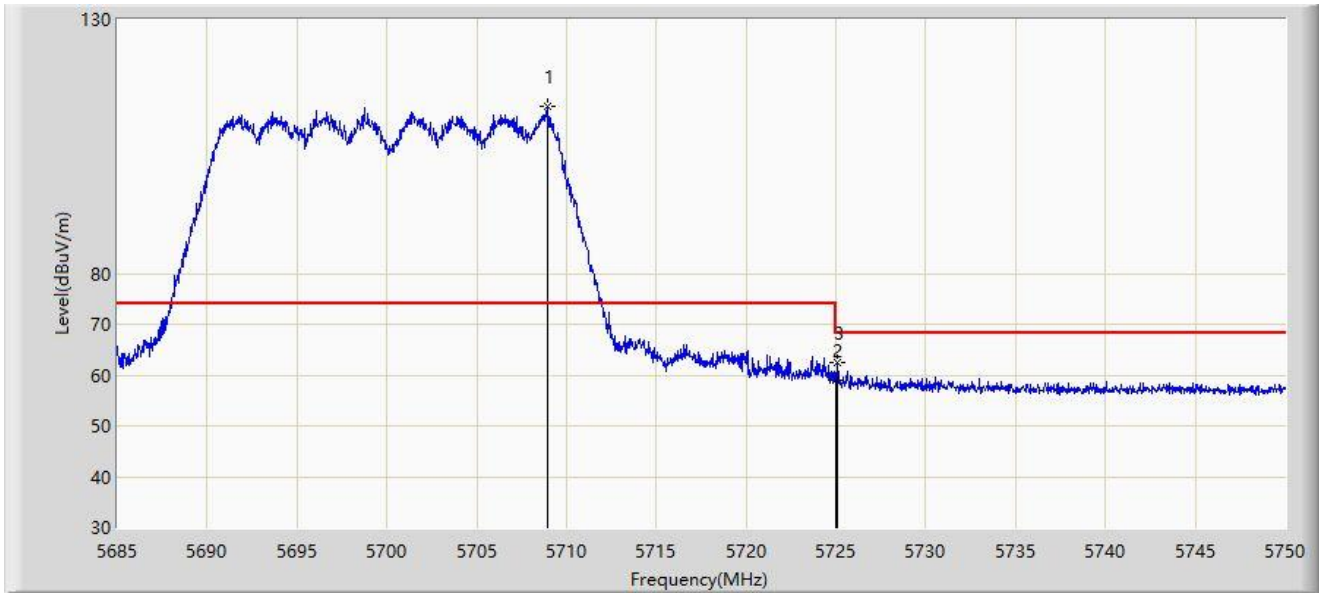


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5708.985	112.930	107.929	N/A	N/A	5.001	PK
2		5725.000	59.109	53.975	-9.091	68.200	5.134	PK
3	*	5725.105	62.378	57.243	-5.822	68.200	5.136	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5745MHz	

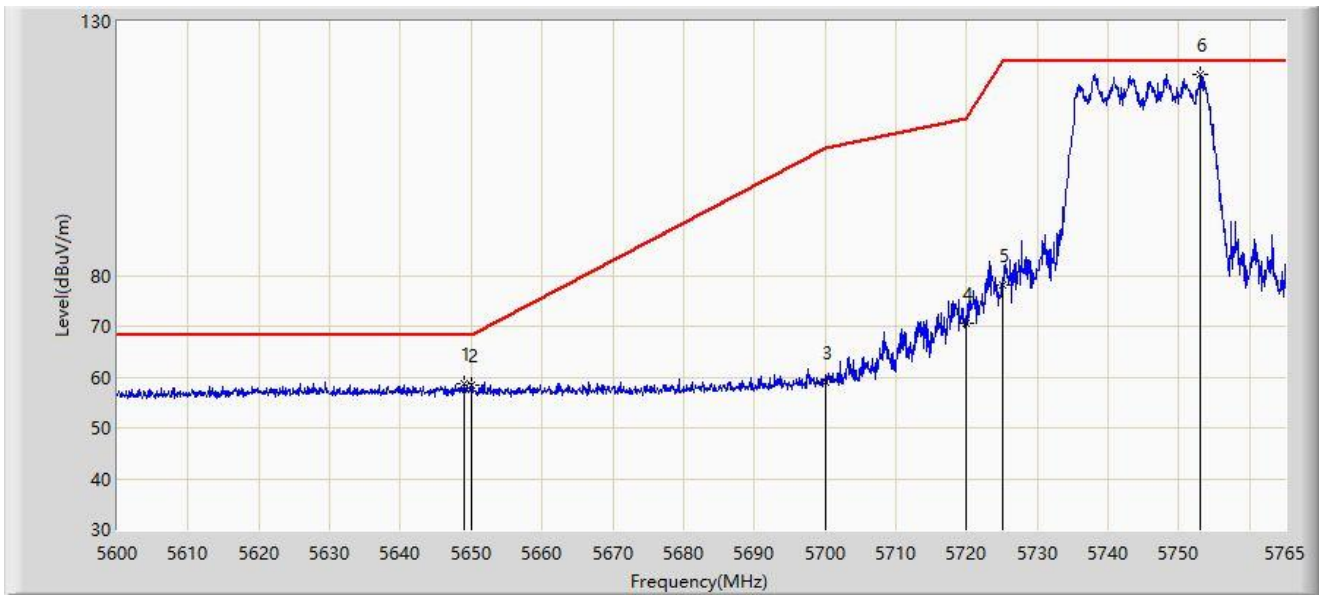


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5649.087	58.574	54.063	-9.626	68.200	4.511	PK
2		5650.000	58.287	53.784	-9.913	68.200	4.502	PK
3		5700.000	59.002	54.139	-46.198	105.200	4.863	PK
4		5720.000	70.450	65.357	-40.350	110.800	5.093	PK
5		5725.000	78.151	73.017	-44.049	122.200	5.134	PK
6		5753.038	119.708	114.706	N/A	N/A	5.002	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-21
Limit: FCC_5.8G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5745MHz	

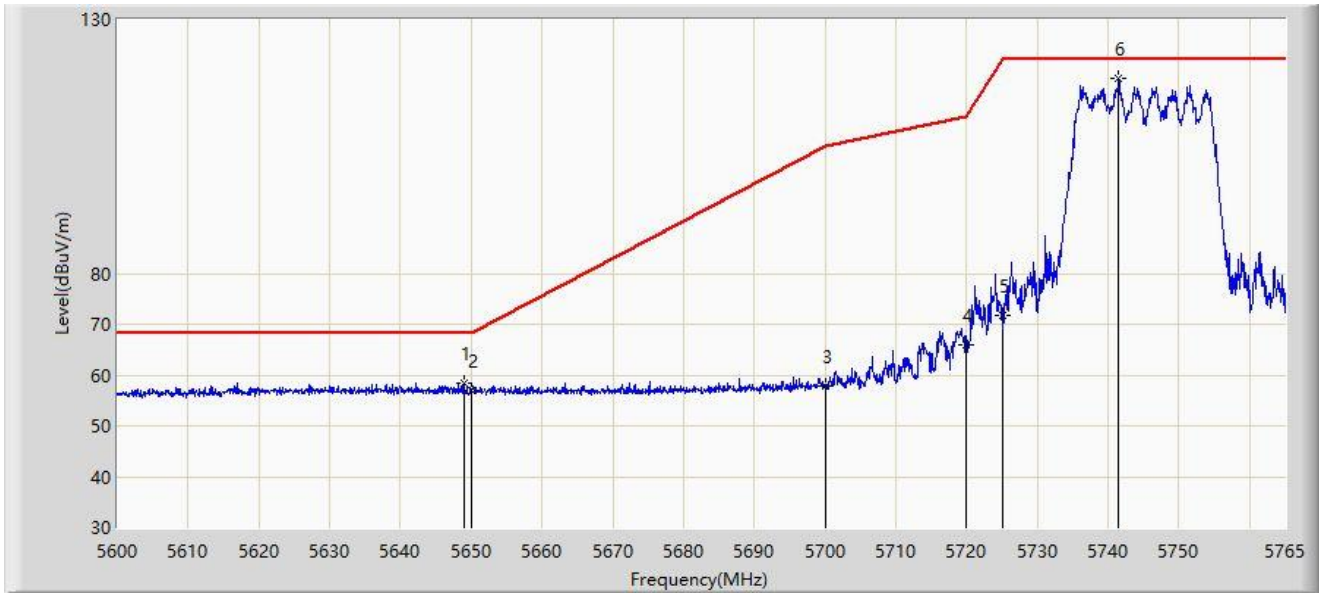

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5649.005	58.446	53.935	-9.754	68.200	4.512	PK
2		5650.000	57.026	52.523	-11.174	68.200	4.502	PK
3		5700.000	57.815	52.952	-47.385	105.200	4.863	PK
4		5720.000	65.904	60.811	-44.896	110.800	5.093	PK
5		5725.000	71.719	66.585	-50.481	122.200	5.134	PK
6		5741.487	118.519	113.545	N/A	N/A	4.974	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).