ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 22 SUBPART H, PART 24 SUBPART E

OF

Product Name:	**3G Data Module**
Brand Name:	**N/A**
Model Name:	**ZOE**
Model Difference:	**N/A**
FCC ID:	**QDJZOE**
Report No.:	**EH/2011/10022-01**
Issue Date:	**Feb. 08, 2011**
FCC Rule Part:	**2 , 22H & 24E**
Prepared for:	**CHI MEI COMMUNICATION SYSTEMS, INC.** **No.4, Ming Sheng St., TuCheng City, Taipei County 236, Taiwan (R.O.C.)**
Prepared by:	**SGS Taiwan Ltd.** **Electronics & Communication Laboratory** **No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan.**

Note: *This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.*

VERIFICATION OF COMPLIANCE

Applicant:	CHI MEI COMMUNICATION SYSTEMS, INC. No.4, Ming Sheng St., TuCheng City, Taipei County 236, Taiwan (R.O.C.)
Product Name:	3G Data Module
Brand Name:	N/A
Model No.:	ZOE
Model Difference:	N/A
FCC ID:	QDJZOE
File Number:	EH/2011/10022-01
Date of test:	Jan. 15, 2011 ~ Feb. 08, 2011
Date of EUT Received:	Jan. 15, 2011

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C-2004 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule FCC PART 22 subpart H, PART 24 subpart E.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Bondi Liu	***Date:***	Feb. 08, 2011
	Bondi Liu / Engineer		
Prepared By:	Cherry Chen	***Date:***	Feb. 08, 2011
	Cherry Chen / Clerk		
Approved By:	Willis Chen	***Date:***	Feb. 08, 2011
	Willis Chen /Asst Manager		

Version

Version No.	Date	Description
00	Feb. 08, 2011	Initial creation of document

Table of Contents

1. GENERAL PRODUCT INFORMATION 6
1.1. Related Submittal(s) / Grant (s) 8
1.2. Test Methodology 8
1.3. Test Facility 8
1.4. Special Accessories 8
1.5. Equipment Modifications 8
2. SYSTEM TEST CONFIGURATION 9
2.1. EUT Configuration 9
2.2. EUT Exercise 9
2.3. Test Procedure 9
2.4. Measurement Equipment Used: 10
2.5. Configuration of Tested System 12
3. SUMMARY OF TEST RESULTS 13
4. DESCRIPTION OF TEST MODES 14
5. RF POWER OUTPUT MEASUREMENT 15
5.1 Standard Applicable: 15
5.2 Test Set-up: 16
5.3 Measurement Procedure: 16
5.4 Measurement Equipment Used: 16
5.5 Measurement Result: 17
6. ERP, EIRP MEASUREMENT 24
6.1. Standard Applicable: 24
6.2. Test SET-UP (Block Diagram of Configuration): 24
6.3. Measurement Procedure: 26
6.4. Measurement Equipment Used: 26
6.5. Measurement Result: 27
7. 99% OCCUPIED BANDWIDTH MEASUREMENT 31
7.1. Standard Applicable: 31
7.2. Test Set-up: 31
7.3. Measurement Procedure: 31
7.4. Measurement Equipment Used: 31
7.5. Measurement Result: 32

8. OUT OF BAND EMISSION AT ANTENNA TERMINALS 46
8.1. Standard Applicable: 46
8.2. Test SET-UP: 46
8.3. Measurement Procedure: 47
8.4. Measurement Equipment Used: 47
8.5. Measurement Result: 48
9. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT 64
9.1. Standard Applicable: 64
9.2. EUT Setup (Block Diagram of Configuration): 64
9.3. Measurement Procedure: 65
9.4. Measurement Equipment Used: 65
9.5. Measurement Result: 65
10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT 90
10.1. Standard Applicable: 90
10.2. Test Set-up: 90
10.3. Measurement Procedure: 90
10.4. Measurement Equipment Used: 90
10.5. Measurement Result: 91
11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT 93
11.1. Standard Applicable: 93
11.2. Test Set-up: 93
11.3. Measurement Procedure: 93
11.4. Measurement Equipment Used: 93
11.5. Measurement Result: 94
PHOTOGRAPHS OF SET UP 96
PHOTOGRAPHS OF EUT 99

1. GENERAL PRODUCT INFORMATION

General:

Product Name	3G Data Module
Brand Name	N/A
Model Name	ZOE
Model Difference	N/A
Antenna Type	Dipole Antenna

GSM and WCDMA:

Cellular Phone Standards Frequency Range and Power:	Operating Frequency		Rated Power
	GPRS 850, Class 10	824 MHz– 849MHz	33 dBm
	EDGE 850, Class 10	824 MHz– 849MHz	27 dBm
	GPRS 1900, Class 10	1850MHz – 1910MHz	30 dBm
	EDGE 1900, Class 10	1850MHz – 1910MHz	26 dBm
	WCDMA/HSUPA/HSDPA Band II	1852.4MHz – 1907.6MHz	24 dBm
	WCDMA/HSUPA/HSDPA Band V	826.4MHz – 846.6 MHz	24 dBm
Hardware Version:	DVT1.2		
Software Version:	1575.00.03.02		
Type of Emission	GPRS 850: 246KGXW, GPRS 1900 :245KGXW EDGE 850: 246KG7W, EDGE 1900:245KG7W WCDMA Band II: 4M15F9W,HSUPA Band II: 4M14F9W WCDMA Band V: 4M14F9W,HSUPA Band V: 4M14F9W		
IMEI:	355032040002853		

Final Amplifier Voltage and Current Information:

Test Mode	DC voltage (V)	DC current (mA)
GSM 850	3.7 Vdc	490
DCS 1900	3.7 Vdc	385
EDGE 850	3.7 Vdc	310
EDGE 1900	3.7 Vdc	295
WCDMA B2	3.7 Vdc	635
HSUPA B2	3.7 Vdc	670
WCDMA B5	3.7 Vdc	565
HSUPA B5	3.7 Vdc	625

This test report applies for GPRS/EDGE 850/1900, WCDMA/HSDPA/HSUPA band II/V.

1.1. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **QDJZOE** filing to comply with Section Part 22 subpart H, Part 24 subpart E of the FCC CFR 47 Rules.

1.2. Test Methodology

Both conducted and radiated testing were performed according to the procedures document of TIA/EIA 603C and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

The Output power Procedure of KDB941225 (SAR Measurement Procedures for 3G devices, WCDMA / HSDPA) was used for EUT and Base station setting.

1.3. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

All equipment is calibrated externally and traceable to SI (International System of Unit).

1.4. Special Accessories

Not available for this EUT intended for grant.

1.5. Equipment Modifications

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 AC Power Line Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4: 2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Conducted Measurement at Antenna Port:

According to measurement procured TIA/EIA 603C, the EUT is placed on a turn table which is 0.8 m above ground plane. A low loss of RF cable was used to connect the antenna port of EUT to measurement equipment.

2.3.3 Radiated Emissions (ERP/EIRP):

The EUT is a placed on as turn table which is 80 cm above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both Horizontal and Vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 2 of TIA/EIA 603C.

2.4. Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012
Spectrum Analyzer	Agilent	E4440A	US41160416	01/23/2010	01/22/2012
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2010	05/13/2012
800 – 1000MHz Filter	Micro-Tronics	BRM13462	001	01/05/2011	01/04/2012
1800 – 2000MHz Filter	Micro-Tronics	BRM13463	001	01/05/2011	01/04/2012
Temperature Chamber	TERCHY	MHG-120LF	911009	04/14/2010	04/13/2012
Temperature Chamber	GIANT FORCE	GTH-150-40-CP-AR	MAA0512-018	02/05/2010	02/04/2012
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S20W5	N/A	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S10W5	N/A	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2010	07/04/2011
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011
DC Power Supply	HP	6038A	2929A-07548	06/27/2010	06/26/2011
DC Power Supply	Topward	3303D	981327	10/25/2010	10/26/2012
Software	Audix	Ver 6.2009 – 23B	N/A	N/A	N/A

ERP, EIRP MEASUREMENT EQUIPMENT List 966 Chamber					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2012
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/15/2010	11/14/2011
Dipole Antenna	SCHWAZBECK	VHAP	908/909	07/10/2010	07/09/2012
Dipole Antenna	SCHWAZBECK	UHAP	891/892	07/10/2010	07/09/2012
Hor.n antenna	SCHWAZBECK	BBHA 9120D	309	01/22/2010	01/21/2012
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2010	05/08/2012
Signal Generator	R&S	SMR40	100210	01/22/2010	01/21/2012
Signal Generator	Agilent	E4438C	MY45093613	06/11/2010	06/10/2011
Pre-Amplifier	Agilent	8447D	1937A02834	11/30/2010	11/29/2011
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2011	01/04/2012
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2010	05/12/2012
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2011	01/04/2012
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2011	01/04/2012
3m Site	SGS	966 chamber	N/A	11/09/2010	11/08/2011

2.5. Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed Channel)

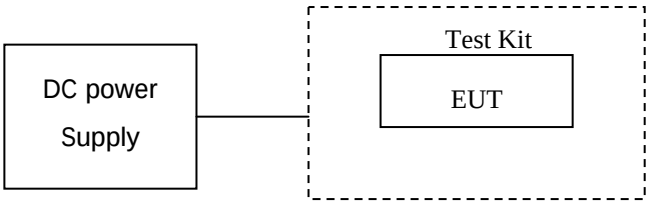

Remote Side



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1.	Universal Radio Communication Tester	R&S	CMU200	102189	shielded	Un-shielded
2.	DC Power Supply	Topward	330D	981327	shielded	Un-shielded

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§2.1046(a)	RF Power Output	Compliant
§2.1046(a) §22.913(a)(2) §24.232(c)	ERP/ EIRP measurement	Compliant
§2.1049(h)	99% Occupied Bandwidth	Compliant
§2.1051 §22.917(a) §24.238(a)	Out of Band Emissions at Antenna Terminals and Band Edge	Compliant
§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	Compliant
§2.1055(a)(1) §22.355 §24.235	Frequency Stability vs. Temperature	Compliant
§2.1055(d)(2) §22.355 §24.235	Frequency Stability vs. Voltage	Compliant

Max ERP/EIRP measurement result:

	dBm		W
GPRS 850 Band	31.95	ERP	1.567
GPRS 1900 Band	25.53	EIRP	0.357
EDGE 850 Band	29.68	ERP	0.929
EDGE 1900 Band	23.26	EIRP	0.212
WCDMA Band II	18.70	EIRP	0.074
HSUPA Band II	19.98	EIRP	0.100
WCDMA Band V	22.48	ERP	0.177
HSUPA Band V	23.48	ERP	0.223

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT for GPRS/EDGE and WCDMA Band II/V. were reported.

5. RF POWER OUTPUT MEASUREMENT

5.1 Standard Applicable:

According to FCC §2.1046.

FCC 22.913(a) Mobile station are limited to 7W.

FCC 24.232(c) Peak Power Measurement

3GPP Power limitation for HSDPA and HSUPA

Maximum Output Powers for HSDPA

Sub-test in table C.10.1.4	Power Class 3		Power Class 4	
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)
1	+24	+1.7/-3.7	+21	+2.7/-2.7
2	+24	+1.7/-3.7	+21	+2.7/-2.7
3	+23.5	+2.2/-3.7	+20.5	+3.2/-2.7
4	+23.5	+2.2/-3.7	+20.5	+3.2/-2.7

Maximum Output Powers for HSUPA

Sub-test in table C.11.1.3	Power Class 3		Power Class 4	
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)
1	+24	+1.7/-6.7	+21	+2.7/-5.7
2	+22	+3.7/-5.2	+19	+4.7/-4.2
3	+23	+2.7/-5.2	+20	+3.7/-4.2
4	+22	+3.7/-5.2	+19	+4.7/-4.2
5	+24	+1.7/-6.7	+21	+2.7/-5.7

5.2 Test Set-up:

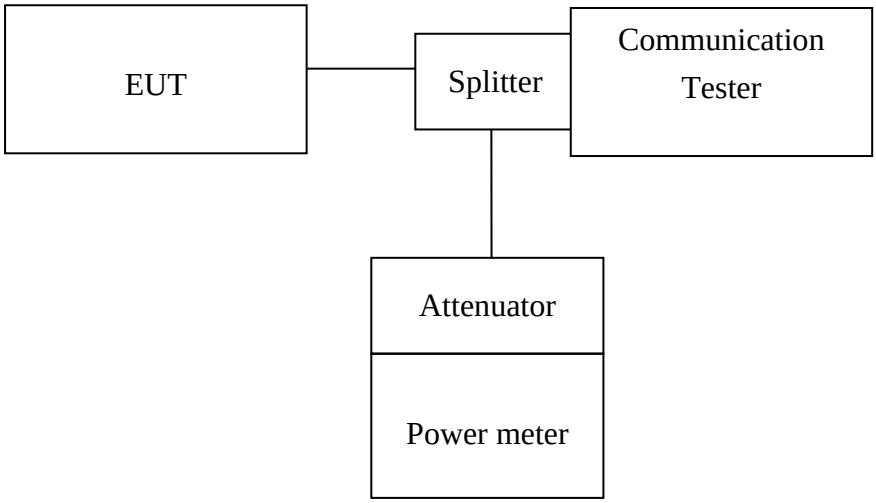

Note: *Measurement setup for testing on Antenna connector*

5.3 Measurement Procedure:

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading. The Procedure of KDB941225(SAR Measurement Procedures for 3G devices, WCDMA/HSDPA) was used for EUT and Base station setting.RMC 12.2kps is used for this testing

5.4 Measurement Equipment Used:

Refer to section 2.4 in this report

5.5 Measurement Result:

5.1 RF Conducted Output Power

5.1.1.: GPRS/EDGE

Result:

EUT Mode	Frequency (MHz)	CH	Peak Power (1DN 1UP) (dBm)	Avg. Power (1DN 1UP) (dBm)	Peak Power (1DN 2UP) (dBm)	Avg. Power (1DN 2UP) (dBm)
GPRS 850 (Class 10)	824.2	128	32.40	32.20	32.10	31.90
	836.6	190	32.30	32.10	32.00	31.80
	848.8	251	32.40	32.20	32.30	32.10

EUT Mode	Frequency (MHz)	CH	Peak Power (1DN 1UP) (dBm)	Avg. Power (1DN 1UP) (dBm)	Peak Power (1DN 2UP) (dBm)	Avg. Power (1DN 2UP) (dBm)
EDGE 850 (Class 10)	824.2	128	29.50	26.30	29.30	26.10
	836.6	190	29.60	26.40	29.30	26.10
	848.8	251	29.50	26.30	29.30	26.10

EUT Mode	Frequency (MHz)	CH	Peak Power (1DN 1UP) (dBm)	Avg. Power (1DN 1UP) (dBm)	Peak Power (1DN 2UP) (dBm)	Avg. Power (1DN 2UP) (dBm)
GPRS 1900 (Class 10)	1850.2	512	29.90	29.70	29.70	29.50
	1880.0	661	29.40	29.20	29.20	29.00
	1909.8	810	29.90	29.70	29.80	29.60

EUT Mode	Frequency (MHz)	CH	Peak Power (1DN 1UP) (dBm)	Avg. Power (1DN 1UP) (dBm)	Peak Power (1DN 2UP) (dBm)	Avg. Power (1DN 2UP) (dBm)
EDGE 1900 (Class 10)	1850.2	512	28.60	25.40	28.30	25.20
	1880.0	661	28.60	25.40	28.20	25.10
	1909.8	810	28.50	25.30	28.20	25.00

5.5.1.2: WCDMA mode

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 V8.4.0 specification. The EUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1/-3). RMC 12.2kps is used for this testing.

Results:

EUT Mode	Frequency (MHz)	CH	Peak Power (dBm)	Avg Power (dBm)
WCDMA Band II	1852.40	9262	25.36	22.28
	1880.00	9400	25.38	22.11
	1907.60	9538	25.47	22.24

EUT Mode	Frequency (MHz)	CH	Peak Power (dBm)	Avg Power (dBm)
WCDMA Band V	826.40	4132	26.60	23.23
	836.60	4183	26.56	23.24
	846.60	4233	26.72	23.37

EUT Mode	Frequency (MHz)	CH	Peak Power (dBm)	Avg Power (dBm)
HSDPA Band II	1852.40	9262	25.27	21.91
	1880.00	9400	25.12	21.57
	1907.60	9538	25.21	21.69

EUT Mode	Frequency (MHz)	CH	Peak Power (dBm)	Avg Power (dBm)
HSDPA Band V	826.40	4132	26.61	23.01
	836.60	4183	26.56	23.05
	846.60	4233	26.80	23.22

EUT Mode	Frequency (MHz)	CH	Peak Power (dBm)	Avg Power (dBm)
HSUPA Band II	1852.40	9262	25.26	21.85
	1880.00	9400	25.15	21.58
	1907.60	9538	25.24	21.76

EUT Mode	Frequency (MHz)	CH	Peak Power (dBm)	Avg Power (dBm)
HSUPA Band V	826.40	4132	26.48	23.09
	836.60	4183	26.43	23.02
	846.60	4233	26.12	22.63

Note: The results above reflect max power with all up bits.

5.5.13: HSDPA Release 6 mode

The following 4 Sub-Tests were completed according to the test requirements outlined in section 5.2A of the 3GPP TS34.121-1 V8.4.0 specification. All TX power requirements for Power Class 3 were met according to table 5.2AA.5 and 5.2B.5 All UE channels and power ratio's are set according to table C10.1.4 & C11.1.3 in the 3GPP TS34.121-1 V8.4.0. RMC 12.2kps is used for this testing

HSDPA SUB-TEST Setting

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH(FOR HSDPA)

Sub-test	β_c	β_d	β_d *(SF)*	β_c/β_d	β_{HS} (*Note1, Note 2*)	CM (dB) *(Note 3)*	MPR (dB) *(Note 3)*	RMC (Kbps)
1	2/15	15/15	64	2/15	4/15	0.0	0.0	12.2
2	12/15 *(Note 4)*	15/15 *(Note 4)*	64	12/15 *(Note 4)*	24/15	1.0	0.0	12.2
3	15/15	8/15	64	15/8	30/15	1.5	0.5	12.2
4	15/15	4/15	64	15/4	30/15	1.5	0.5	12.2

Note: The recommended HSDPA MPRs are implemented as per following sub-tests.

Results:

Mode	Sub-test	RMS Power (dBm) Channel			Power Class 3 Limitation (dBm)	Comments
		9262	9400	9538		
HSDPA B2	1	22.45	22.00	22.10	20.3dBm – 25.7dBm	Pass
	2	22.16	21.97	22.09	20.3dBm – 25.7dBm	Pass
	3	21.97	21.55	21.57	19.8dBm – 25.7dBm	Pass
	4	22.04	21.56	21.69	19.8dBm – 25.7dBm	Pass

Results:

Mode	Sub-test	RMS Power (dBm) Channel			Power Class 3 Limitation (dBm)	Comments
		4132	4172	4233		
HSDPA B5	1	23.02	21.10	23.49	20.3dBm – 25.7dBm	Pass
	2	23.16	23.13	23.24	20.3dBm – 25.7dBm	Pass
	3	22.56	22.62	23.00	19.8dBm – 25.7dBm	Pass
	4	22.61	22.66	23.06	19.8dBm – 25.7dBm	Pass

5.5.1.4: HSPA (HSDPA & HSUPA) Release 6 mode

The following 5 Sub-Tests were completed according to the test requirements outlined in section 5.2A of the 3GPP TS34.121-1 V8.4.0 specification. All TX power requirements for Power Class 3 were met according to table 5.2AA.5 and 5.2B.5 All UE channels and power ratio's are set according to table C11.1.3 in the 3GPP TS34.121-1 V8.4.0. RMC 12.2kps is used for this testing

HSPA SUB-TEST Setting

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH(FOR HSUPA)

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (Codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI	RMC (Kbps)
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75	12.2
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67	12.2
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed}1: 47/15 β_{ed}2: 47/15	4 4	2	2.0	1.0	15	92	12.2
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71	12.2
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81	12.2

Note: The recommended HSUPA are implemented as per following sub-tests.

Results:

Mode	Sub-test	RMS Power (dBm) Channel			Power Class 3 Limitation (dBm)	Comments
		9262	9400	9538		
HSUPA B2	1	22.20	22.09	22.18	17.3dBm – 25.7dBm	Pass
	2	20.25	20.16	20.22	16.8dBm – 25.7dBm	Pass
	3	21.26	21.11	21.26	17.8dBm – 25.7dBm	Pass
	4	20.38	20.21	21.26	16.8dBm – 25.7dBm	Pass
	5	22.09	21.95	22.09	17.3dBm – 25.7dBm	Pass

Results:

Mode	Sub-test	RMS Power (dBm) Channel			Power Class 3 Limitation (dBm)	Comments
		4132	4172	4233		
HSUPA B5	1	23.19	23.17	23.29	17.3dBm – 25.7dBm	Pass
	2	21.25	21.25	21.33	16.8dBm – 25.7dBm	Pass
	3	22.23	22.23	22.37	17.8dBm – 25.7dBm	Pass
	4	21.30	21.31	21.41	16.8dBm – 25.7dBm	Pass
	5	23.05	23.00	23.18	17.3dBm – 25.7dBm	Pass

5.5.2 Maximum Power Reduction: PCS1900 band

PCL	0	1	2	3	4	5	6	7	8
Output power (dBm)	29.2	27.1	24.9	23	21	19	16.9	15.2	13.2
PCL	9	10	11	12	13	14	15		
Output power (dBm)	11.1	9.3	7.4	5.3	3.4	1.3	-0.2		

Note: The EUT output power was controlled by simulator. Set Communication Tester CMU200 PCL as above, and get the mobile phone output power reading.

WCDMA/HSDPA band II / V

The EUT output power was controlled by simulator. Set Communication Tester CMU200 function key “UE Power Control” and enter max rated power 24dBm. The EUT is going to be set to max output power to 24dBm. then record the read(see page 19 for measurement data) . The min. power was measures by a function key “minimum power” then record the read. It is -52.5dBm. The power variation can be 0.1dB step by setting.

6. ERP, EIRP MEASUREMENT

6.1. Standard Applicable:

According to FCC §2.1046

FCC 22.913(a) Mobile station are limited to 7W ERP.

FCC 24.232(b) Mobile station are limited to 2W EIRP.

6.2. Test SET-UP (Block Diagram of Configuration):

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

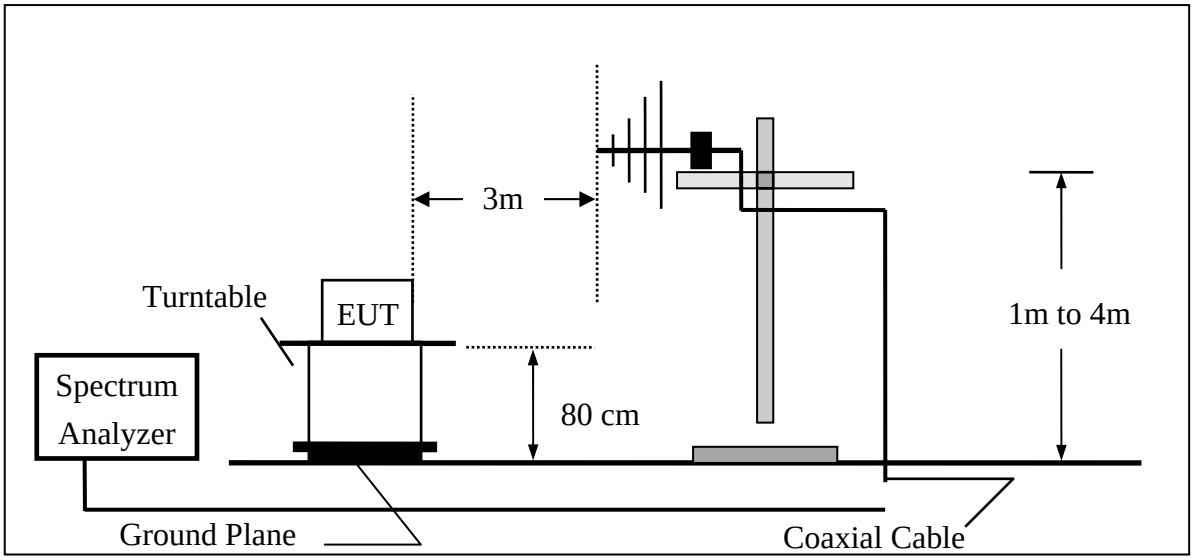

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

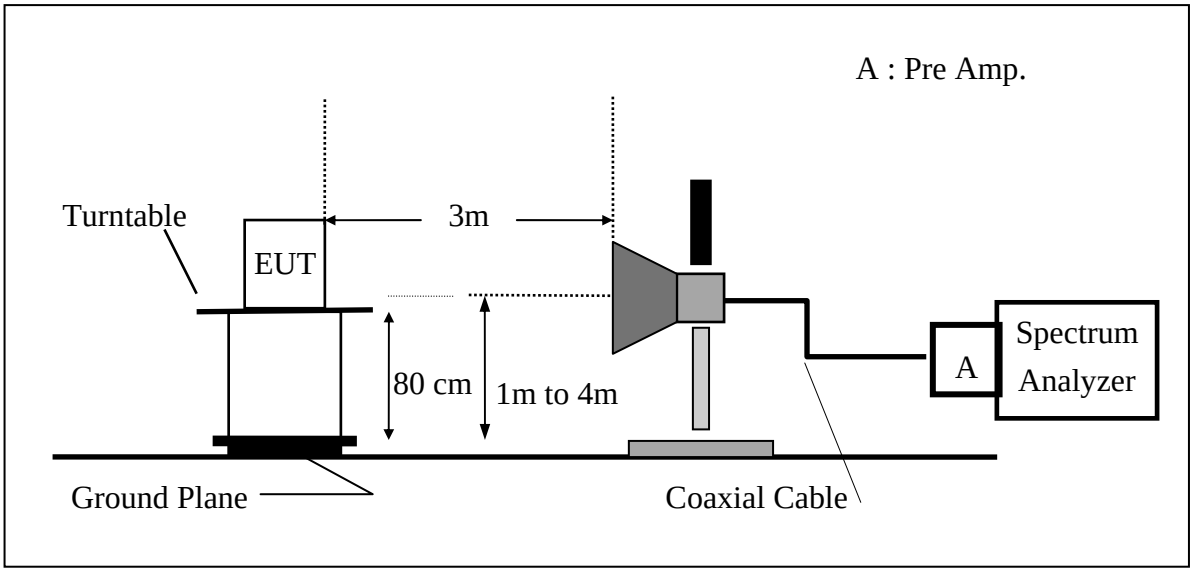

(C) Substituted Method Test Set-UP

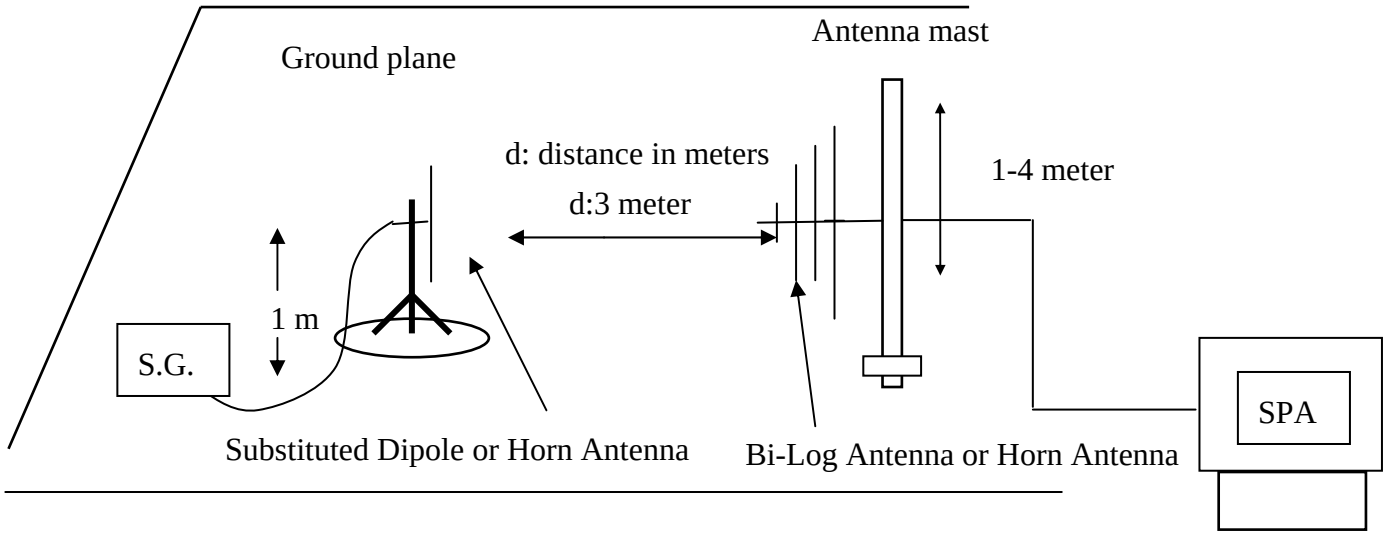

6.3. Measurement Procedure:

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) – Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable Loss (dB)

6.4. Measurement Equipment Used:

Refer to section 2.4 in this report

6.5. Measurement Result:

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
GPRS 850	824.20	128	E2	V	119.41	33.02	-7.87	3.62	21.52	38.40
				H	129.72	43.45	-7.87	3.62	31.95	38.40
	836.60	190	E2	V	119.94	33.69	-7.88	3.65	22.16	38.40
				H	129.32	43.09	-7.88	3.65	31.56	38.40
	848.80	251	E2	V	119.94	33.82	-7.88	3.68	22.26	38.40
				H	129.30	43.11	-7.88	3.68	31.55	38.40

Remark：

(1) The RBW,VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
GPRS 1900	1850.20	512	E2	V	117.05	12.66	9.90	5.56	17.00	33.00
				H	125.18	21.00	9.90	5.56	25.34	33.00
	1880.00	661	E2	V	118.12	13.76	9.99	5.61	18.14	33.00
				H	124.98	20.84	9.99	5.61	25.21	33.00
	1909.80	810	E2	V	118.50	14.17	10.08	5.66	18.59	33.00
				H	125.22	21.11	10.08	5.66	25.53	33.00

Remark：

(1) The RBW,VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
EDGE 850	824.20	128	E2	V	116.77	30.38	-7.87	3.62	18.88	38.40
				H	127.45	41.18	-7.87	3.62	29.68	38.40
	836.60	190	E2	V	115.62	29.37	-7.88	3.65	17.84	38.40
				H	127.08	40.85	-7.88	3.65	29.32	38.40
	848.80	251	E2	V	116.02	29.90	-7.88	3.68	18.34	38.40
				H	126.94	40.75	-7.88	3.68	29.19	38.40

Remark：

(1) The RBW,VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
EDGE 1900	1850.20	512	E2	V	116.23	11.84	9.90	5.56	16.18	33.00
				H	123.10	18.92	9.90	5.56	23.26	33.00
	1880.00	661	E2	V	114.80	10.44	9.99	5.61	14.82	33.00
				H	121.86	17.72	9.99	5.61	22.09	33.00
	1909.80	810	E2	V	115.81	11.48	10.08	5.66	15.90	33.00
				H	122.56	18.45	10.08	5.66	22.87	33.00

Remark：

(1) The RBW,VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz

Measurement Result:

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
WCDMA Band II	1852.40	9262	E2	V	111.66	7.28	9.90	5.56	11.61	33.00
				H	118.54	14.36	9.90	5.56	18.70	33.00
	1880.00	9400	E2	V	111.58	7.22	9.99	5.61	11.60	33.00
				H	118.23	14.09	9.99	5.61	18.46	33.00
	1907.60	9538	E2	V	111.64	7.31	10.07	5.66	11.72	33.00
				H	118.15	14.04	10.07	5.66	18.45	33.00

Remark：

(1) The RBW,VBW of SPA for frequency

RBW= 5MHz , VBW= 8MHz

Measurement Result:

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
HSUPA Band II	1852.40	9262	E2	V	112.12	7.74	9.90	5.56	12.07	33.00
				H	119.17	14.99	9.90	5.56	19.33	33.00
	1880.00	9400	E2	V	112.79	8.43	9.99	5.61	12.81	33.00
				H	119.25	15.11	9.99	5.61	19.48	33.00
	1907.60	9538	E2	V	112.98	8.65	10.07	5.66	13.06	33.00
				H	119.68	15.57	10.07	5.66	19.98	33.00

Remark：

(1) The RBW,VBW of SPA for frequency

RBW= 5MHz , VBW= 8MHz

Measurement Result:

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
WCDMA Band V	826.40	4132	E2	V	111.22	24.86	-10.02	3.63	11.21	38.40
				H	121.46	35.20	-10.02	3.63	21.56	38.40
	836.60	4183	E2	V	111.34	25.08	-10.02	3.65	11.41	38.40
				H	122.38	36.15	-10.02	3.65	22.48	38.40
	846.60	4233	E2	V	110.75	24.60	-10.02	3.67	10.91	38.40
				H	121.78	35.58	-10.02	3.67	21.89	38.40

Remark：

(1) The RBW,VBW of SPA for frequency

RBW= 5MHz , VBW= 8MHz

Measurement Result:

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
HSUPA Band V	826.40	4132	E2	V	112.15	25.79	-10.02	3.63	12.14	38.40
				H	122.37	36.11	-10.02	3.63	22.47	38.40
	836.60	4183	E2	V	112.35	26.09	-10.02	3.65	12.42	38.40
				H	123.38	37.15	-10.02	3.65	23.48	38.40
	846.60	4233	E2	V	111.70	25.55	-10.02	3.67	11.86	38.40
				H	122.65	36.45	-10.02	3.67	22.76	38.40

Remark：

(1) The RBW,VBW of SPA for frequency

RBW= 5MHz , VBW= 8MHz

7. 99% OCCUPIED BANDWIDTH MEASUREMENT

7.1. Standard Applicable:

According to §FCC 2.1049.

7.2. Test Set-up:

Refer to section 5.2 in this report

7.3. Measurement Procedure:

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW (10/30KHz) was set to about 1% of emission BW, VBW= 3 times RBW(30/100KHz), -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

7.4. Measurement Equipment Used:

Refer to section 2.4 in this report

7.5. Measurement Result:

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
GPRS 850	824.20	128	0.2460
	836.60	190	0.2453
	848.80	251	0.2448

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
GPRS 1900	1850.20	512	0.2452
	1880.00	661	0.2435
	1909.80	810	0.2455

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
EDGE 850	824.20	128	0.2449
	836.60	190	0.2426
	848.80	251	0.2459

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
EDGE 1900	1850.20	512	0.2447
	1880.00	661	0.2422
	1909.80	810	0.2429

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
WCDMA II	1852.4	9262	4.1336
	1880.0	9400	4.1494
	1907.6	9538	4.1316

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
HSUPA II	1852.4	9296	4.1381
	1880.0	9400	4.1388
	1907.6	9538	4.1361

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
WCDMA V	826.40	4132	4.1315
	836.60	4183	4.1363
	846.60	4233	4.1380

EUT Mode	Frequency (MHz)	CH	99% Bandwidth (MHz)
HSUPA V	826.40	4132	4.1225
	836.60	4183	4.1385
	846.60	4233	4.1323

Figure 7-1: GPRS 850 Channel Low

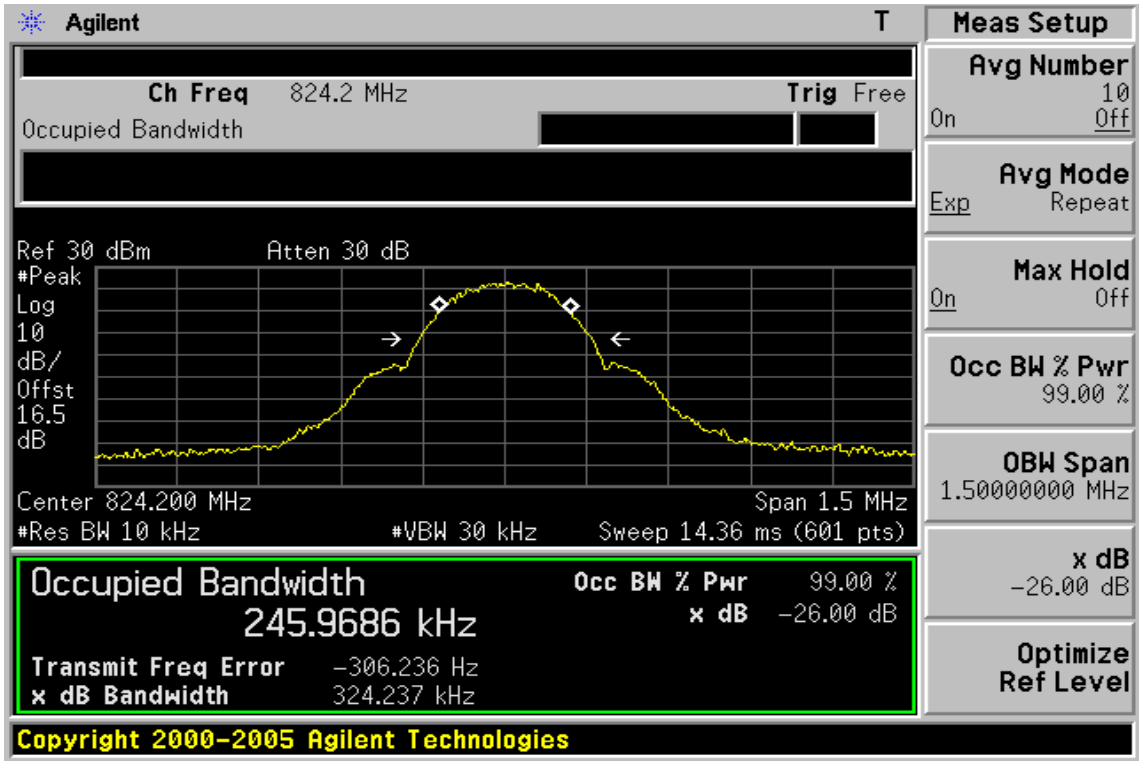

Figure 7-2 GPRS 850 Channel Mid

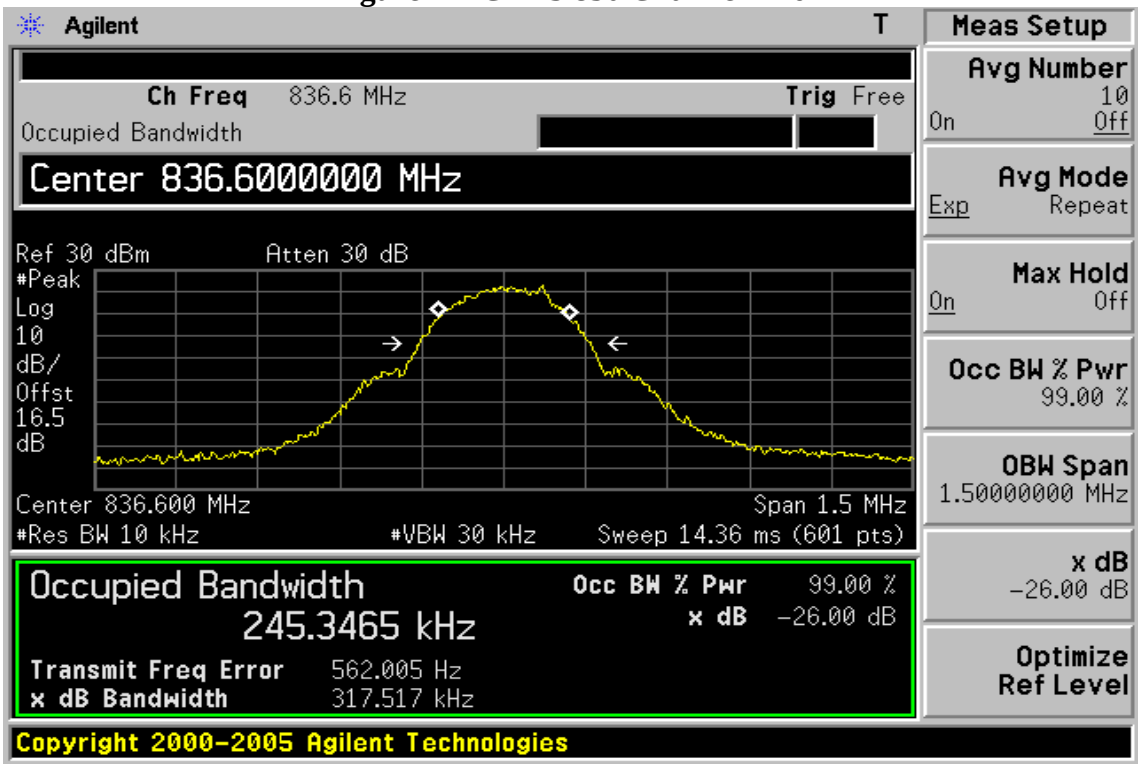

GPRS Figure 7-3: GPRS 850 Channel High

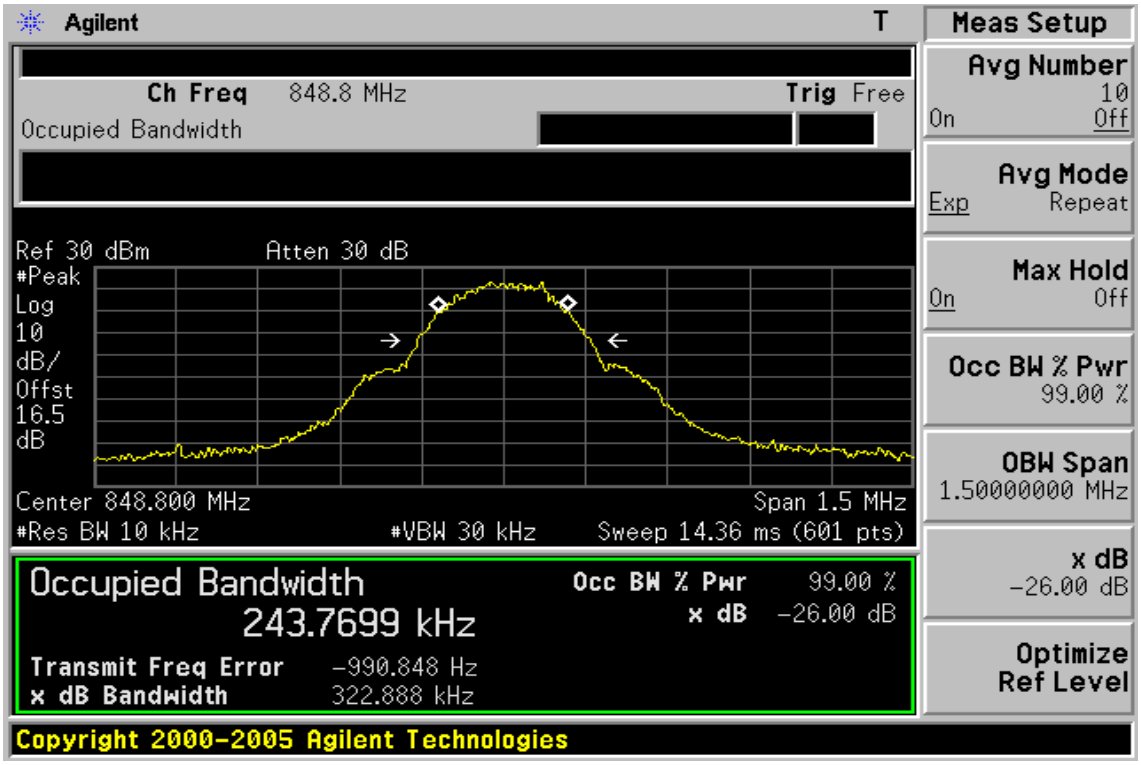

Figure 7-4: GPRS 1900 Channel Low

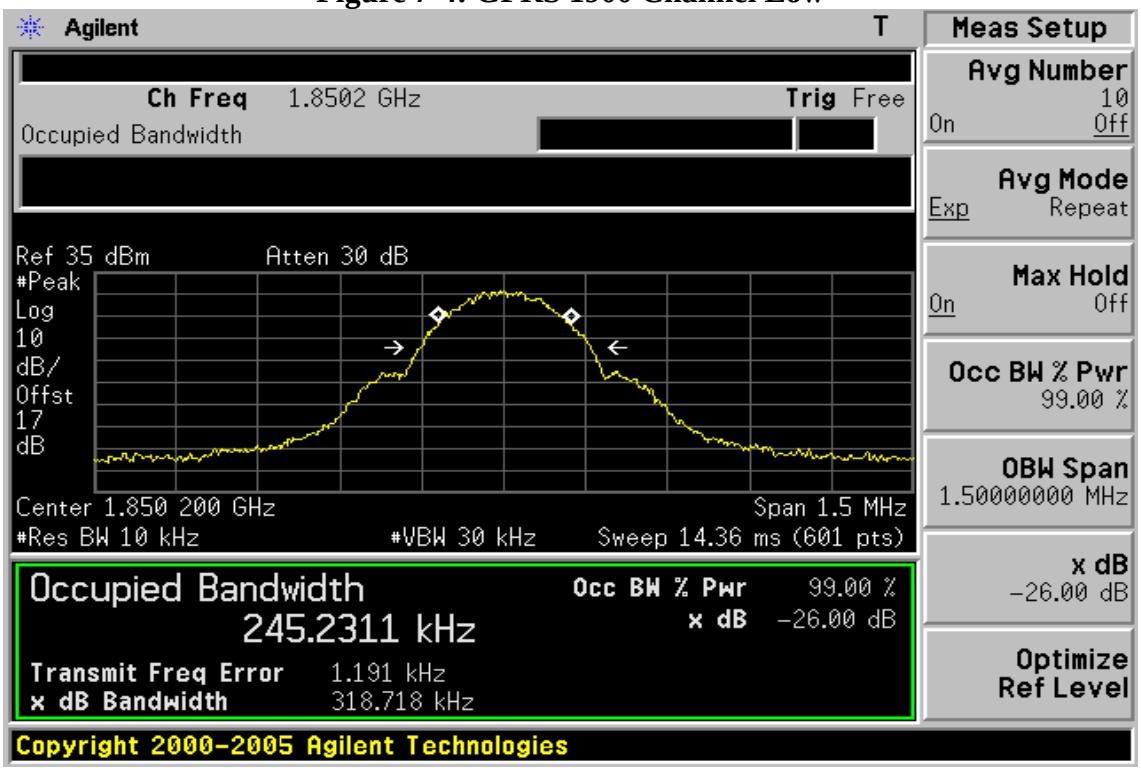

Figure 7-5 GPRS 1900 Channel Mid

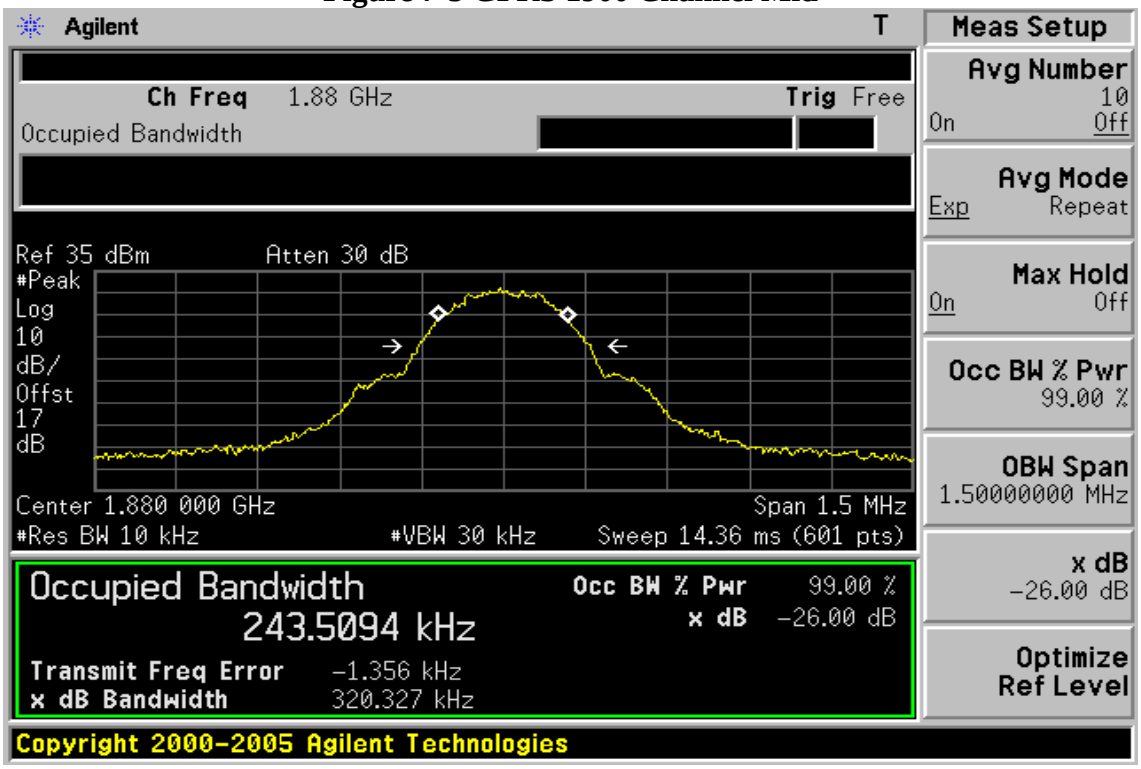

Figure 7-6: GPRS 1900 Channel High

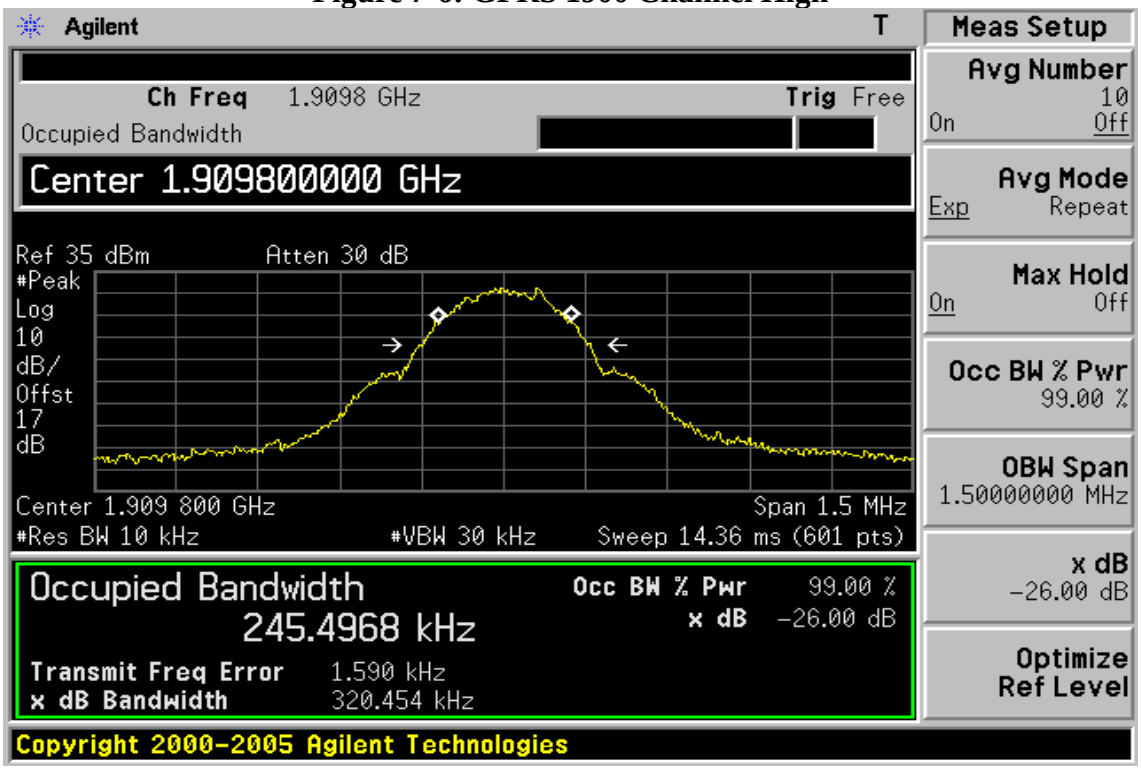

Figure 7-7: EDGE 850 Channel Low

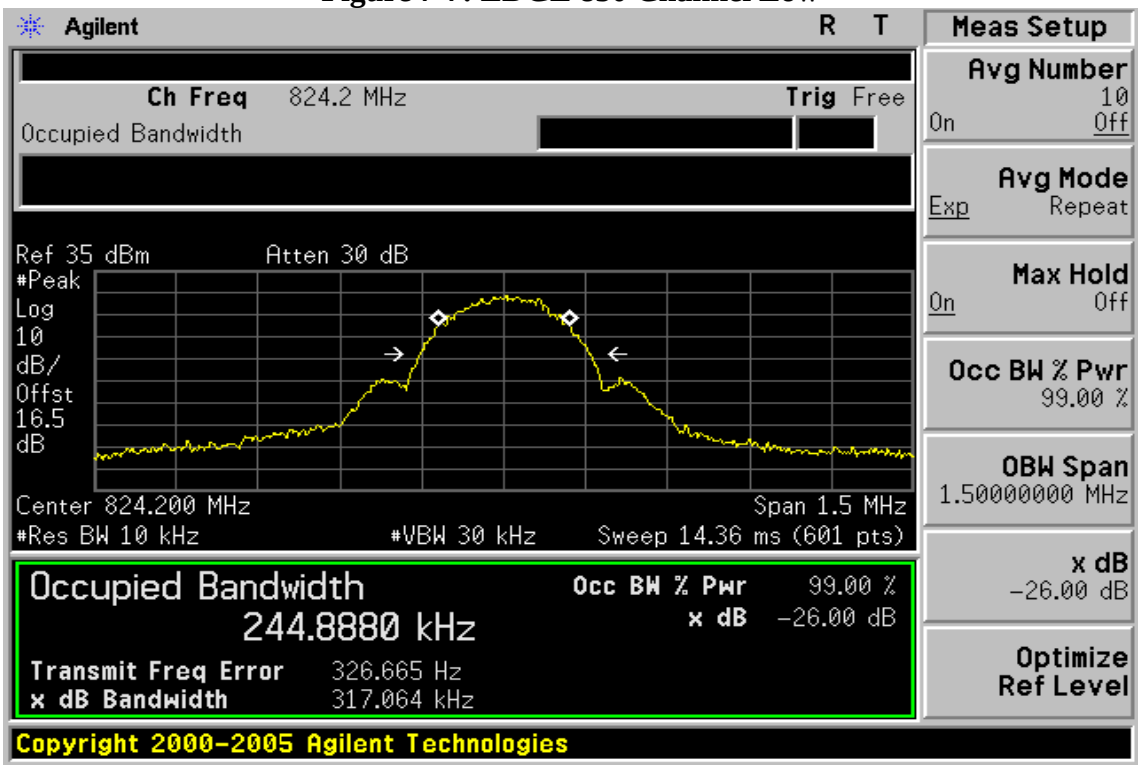

Figure 7-8 EDGE 850 Channel Mid

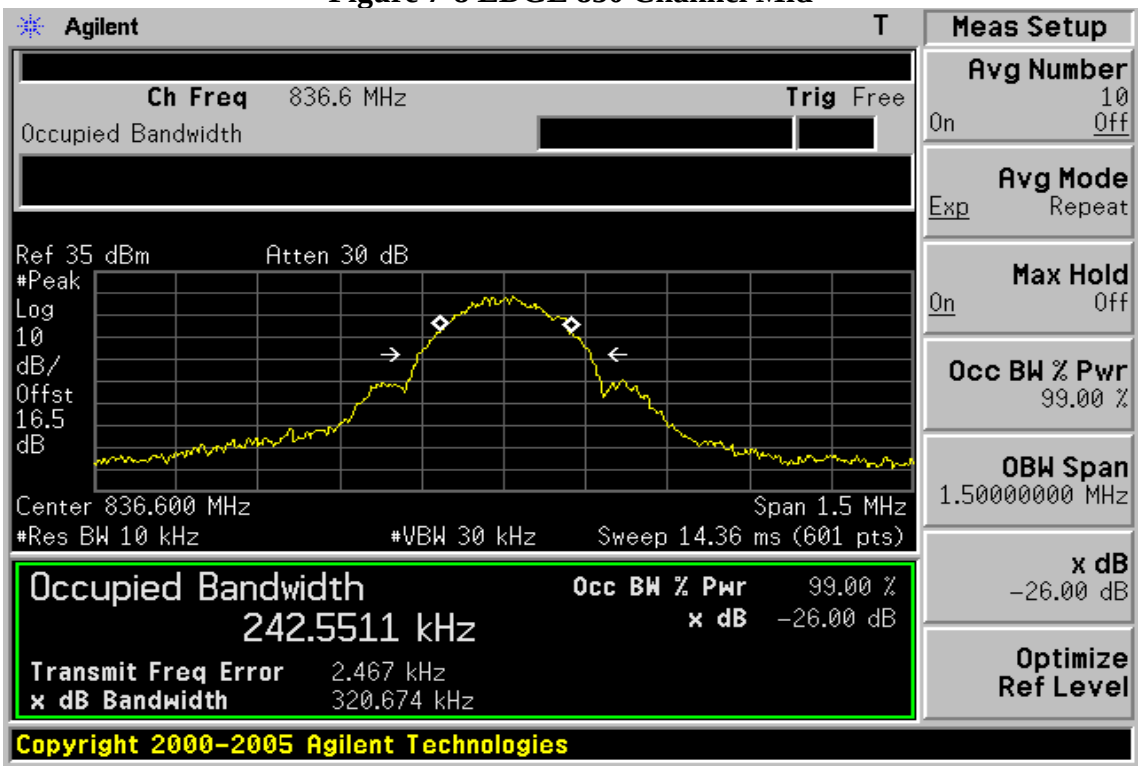

Figure 7-9 EDGE 850 Channel High

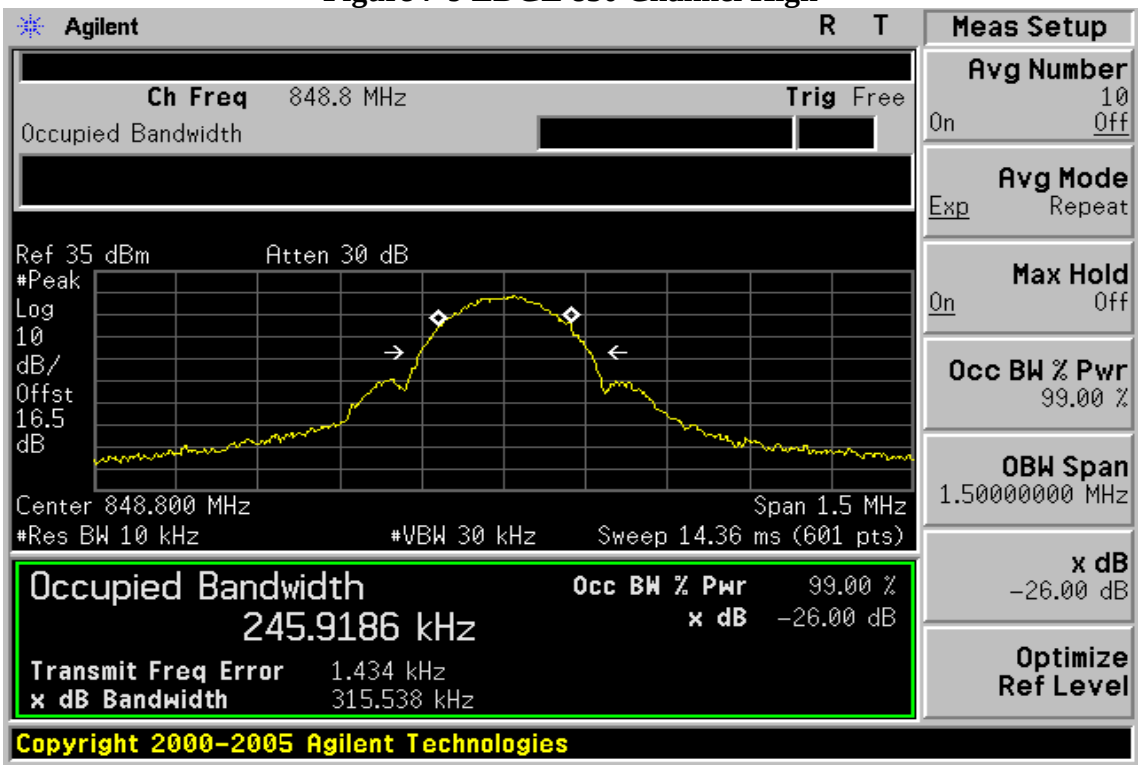

Figure 7-10 EDGE 1900 Channel Low

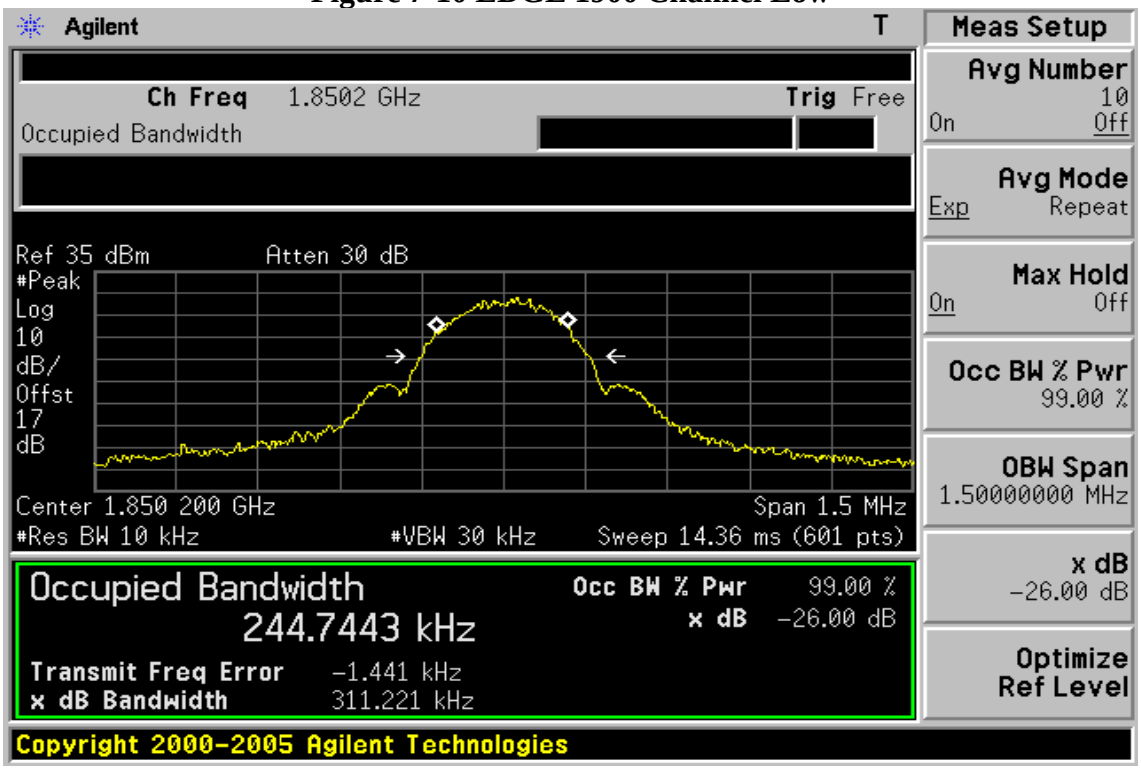

Figure 7-11 EDGE 1900 Channel Mid

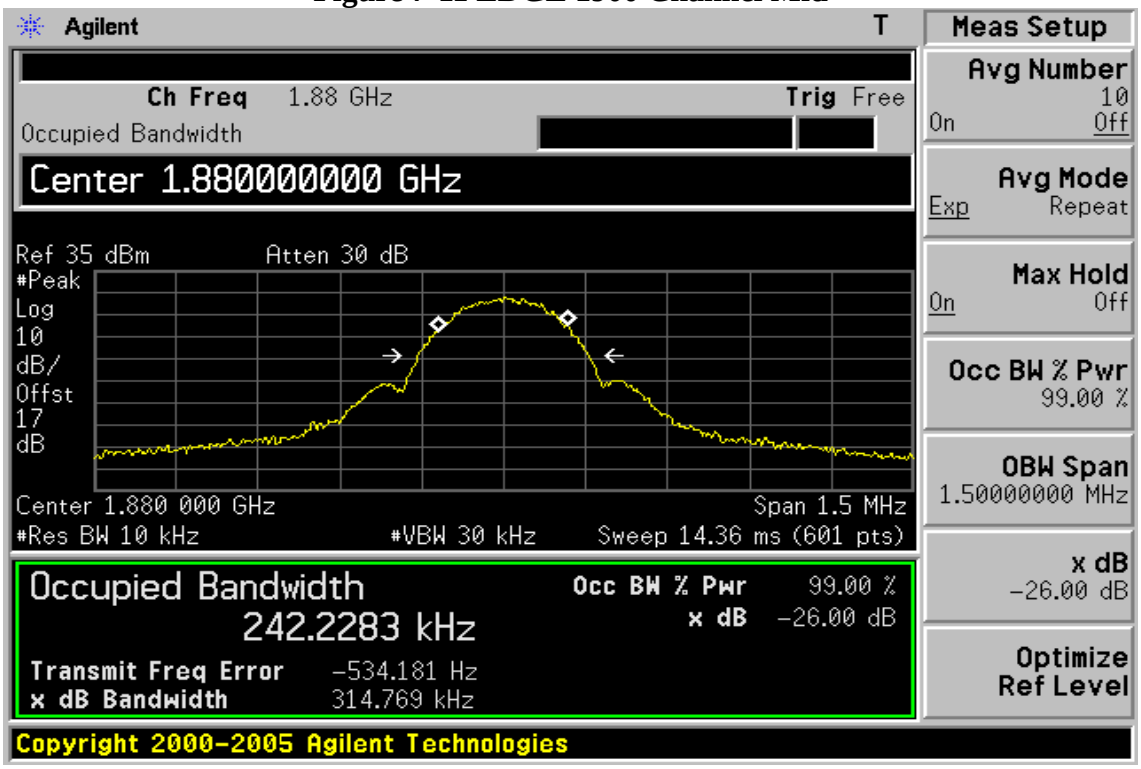

Figure 7-12 EDGE 1900 Channel High

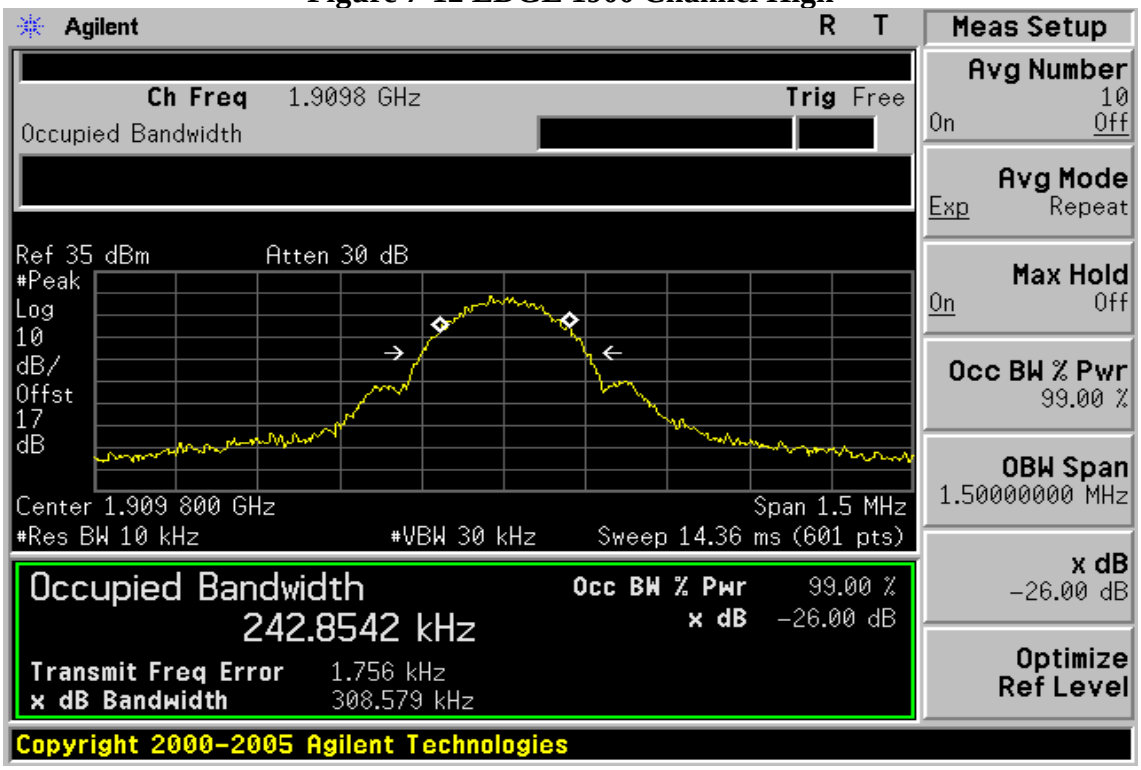

Figure 7-13 WCDMA II Channel Low

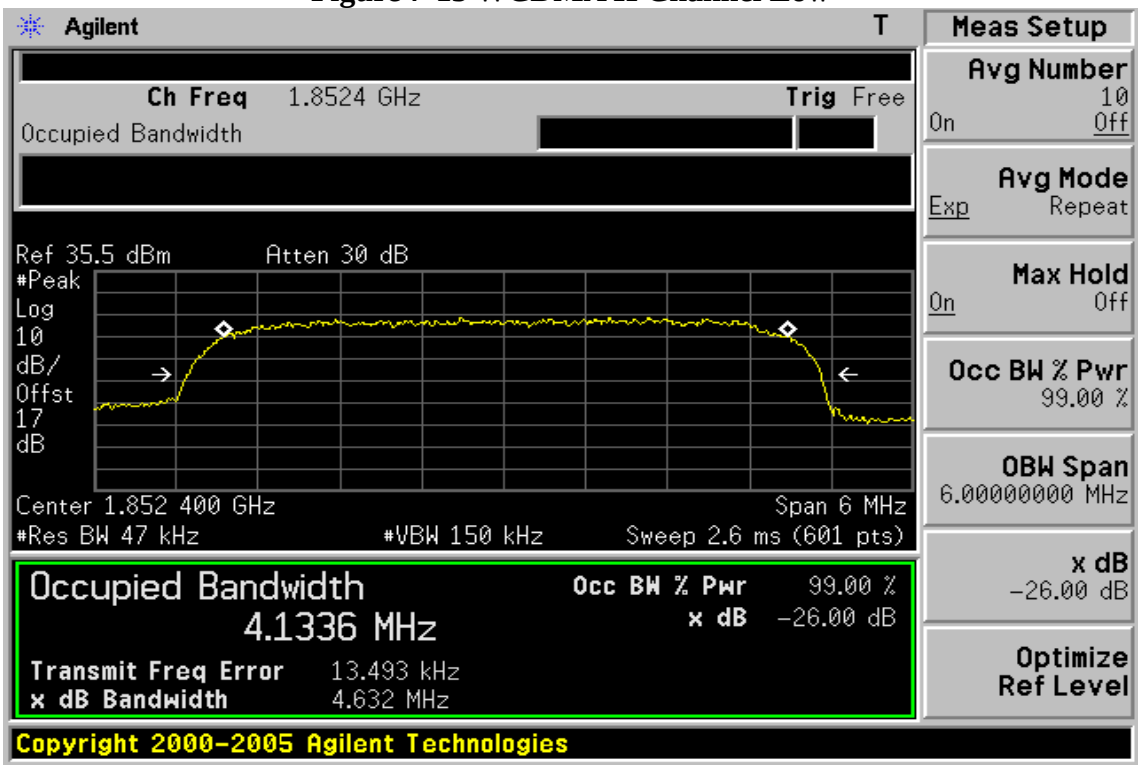

Figure 7-14 WCDMA II Channel Mid

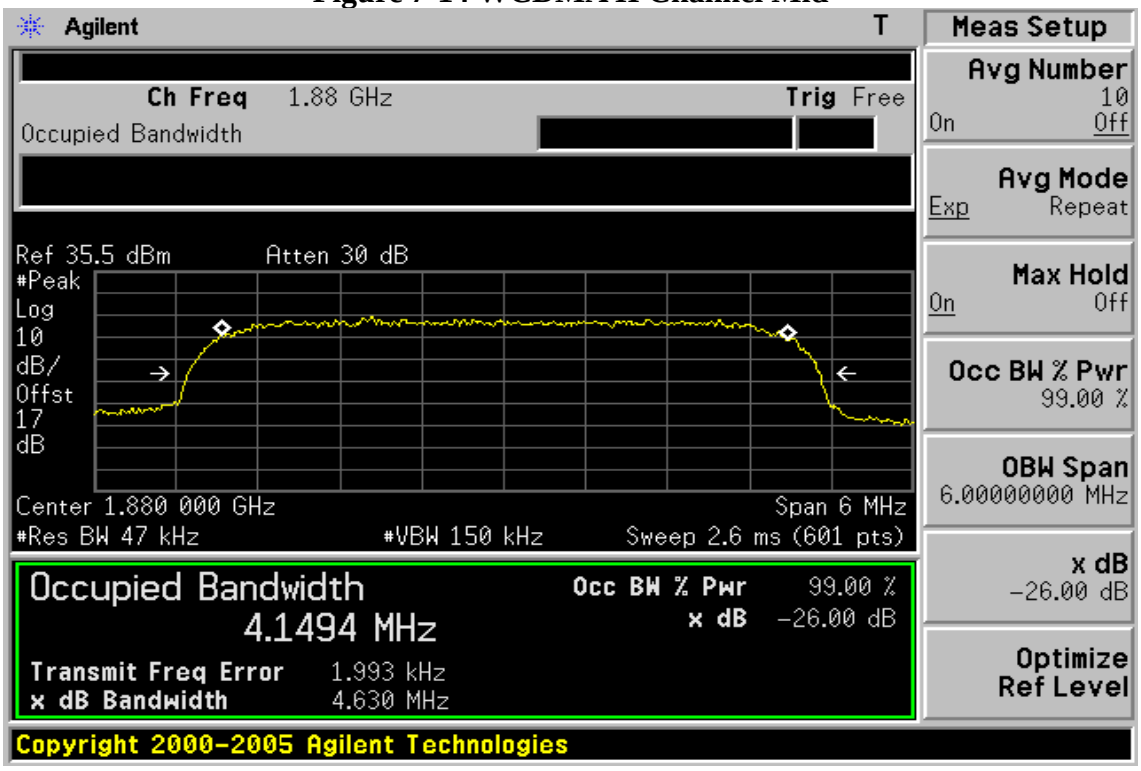

Figure 7-15 WCDMA II Channel High

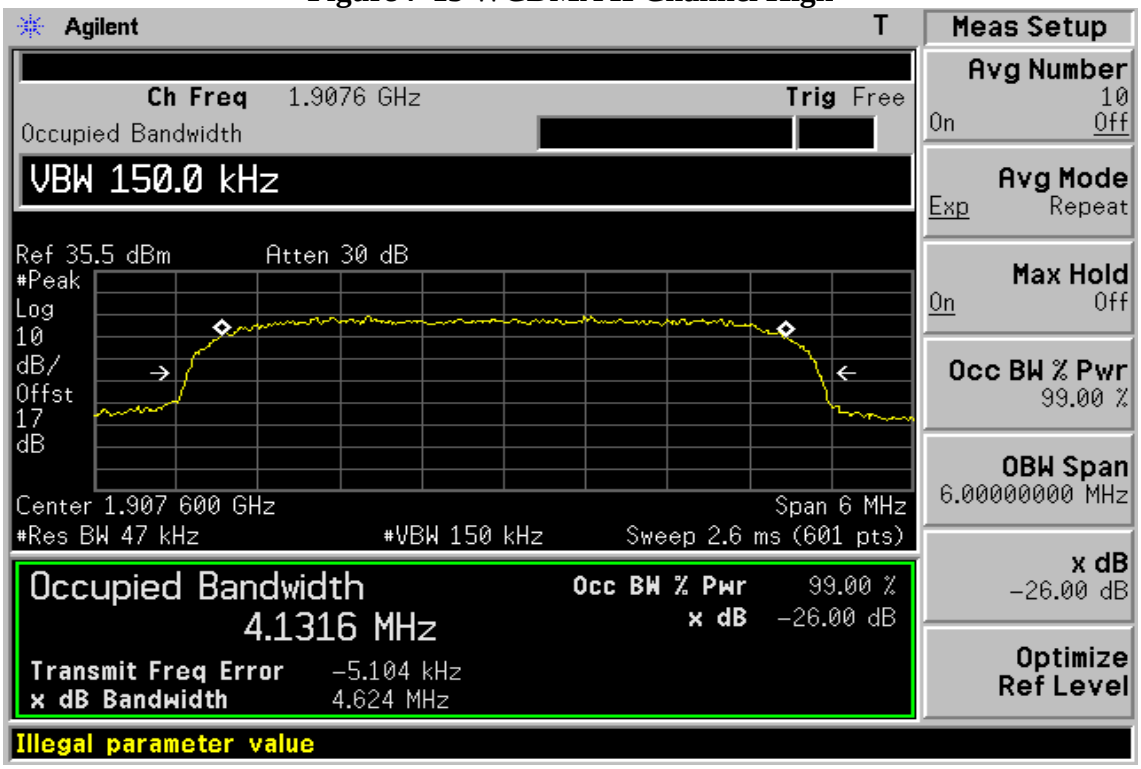

Figure 7-16 HSUPA II Channel Low

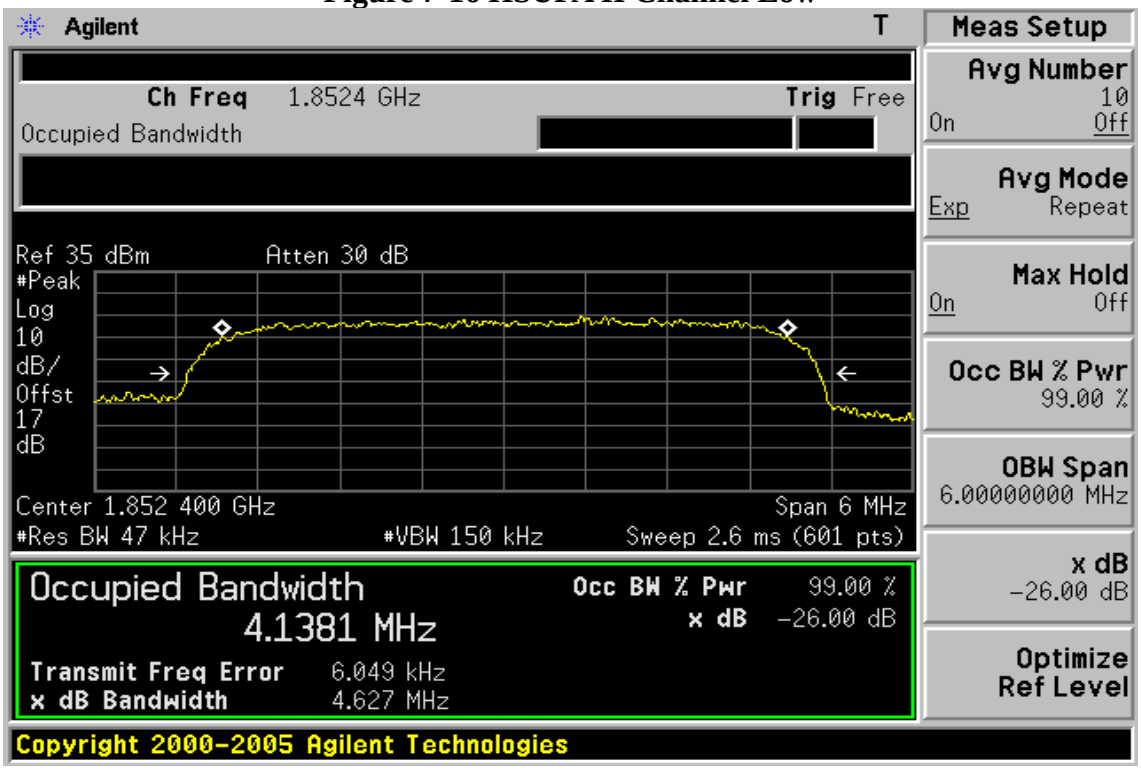

Figure 7-17 HSUPA II Channel Mid

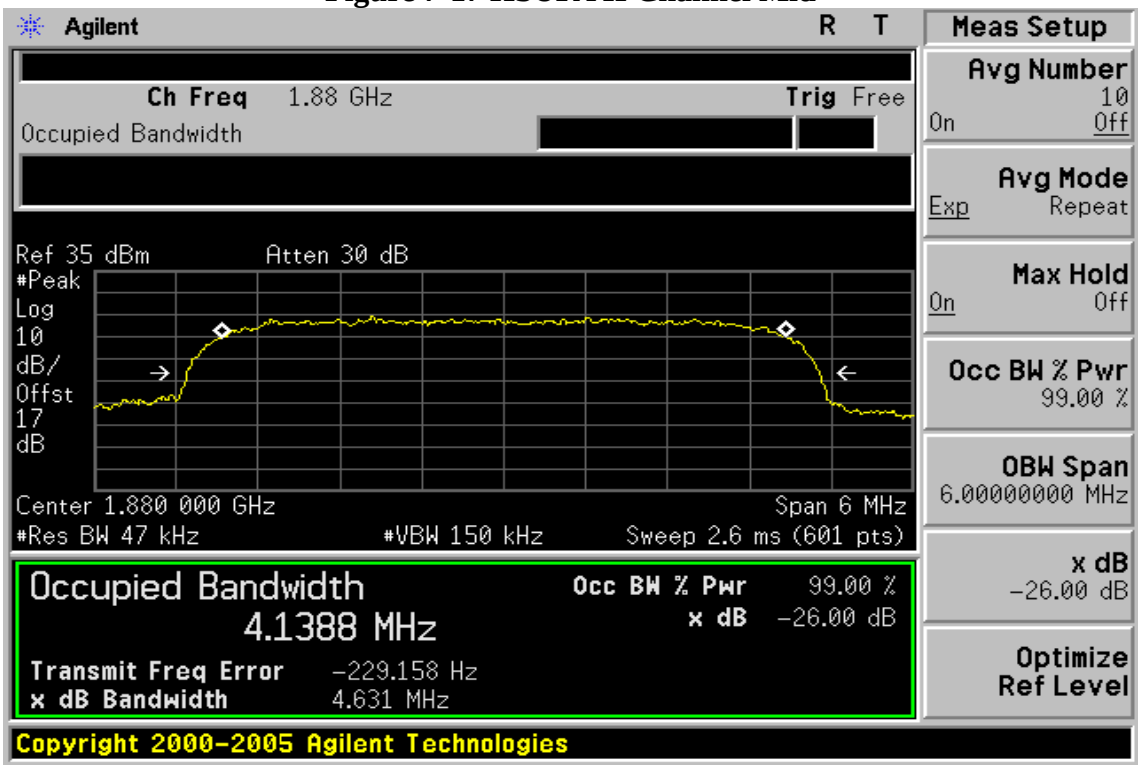

Figure 7-18 HSUPA II Channel High

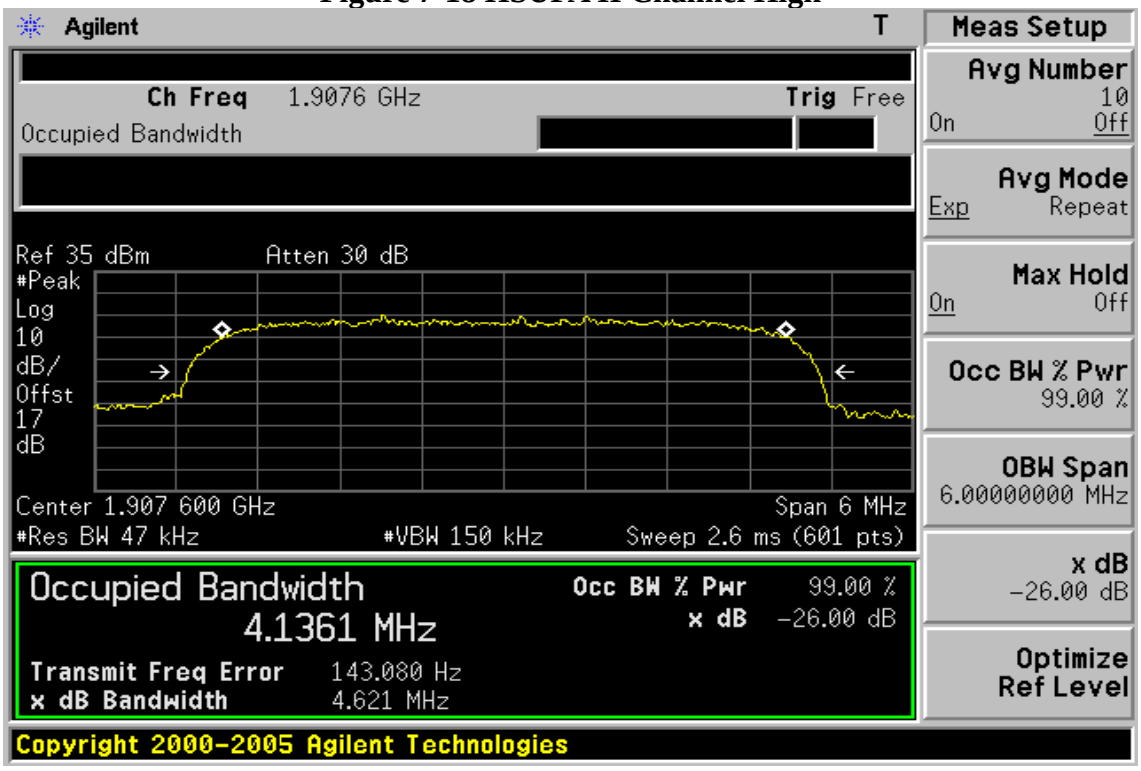

Figure 7-19 WCDMA V Channel Low

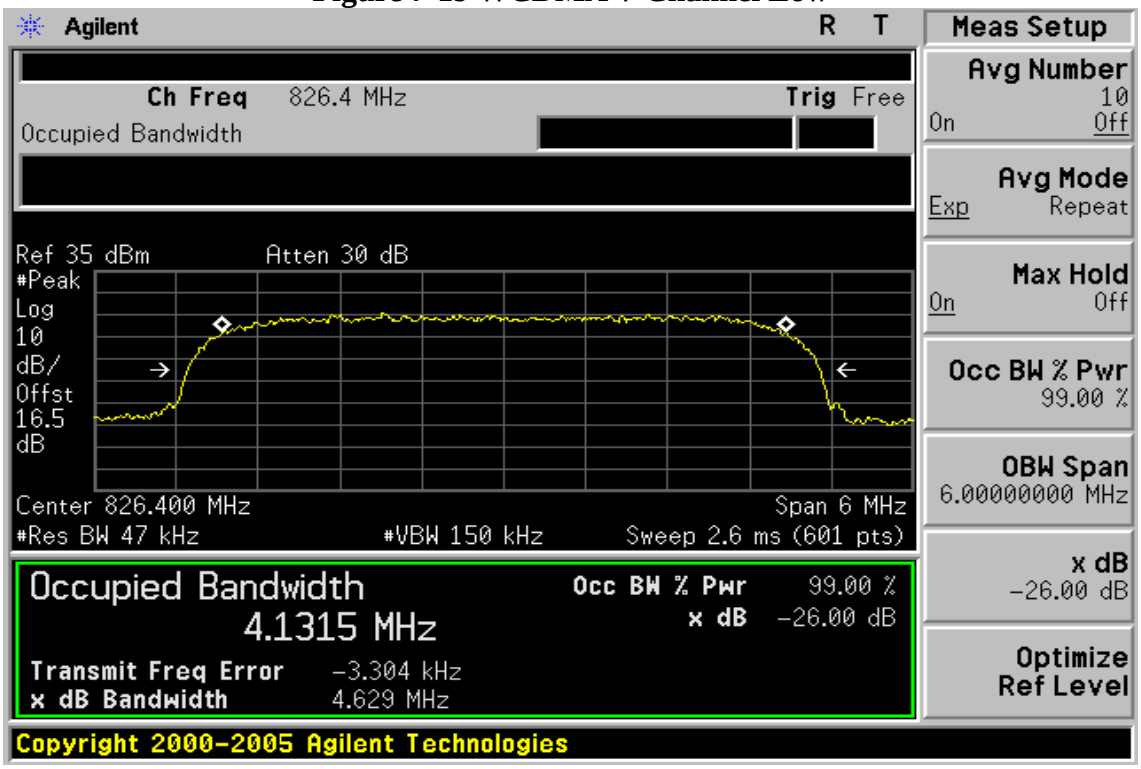

Figure 7-20 WCDMA V Channel Mid

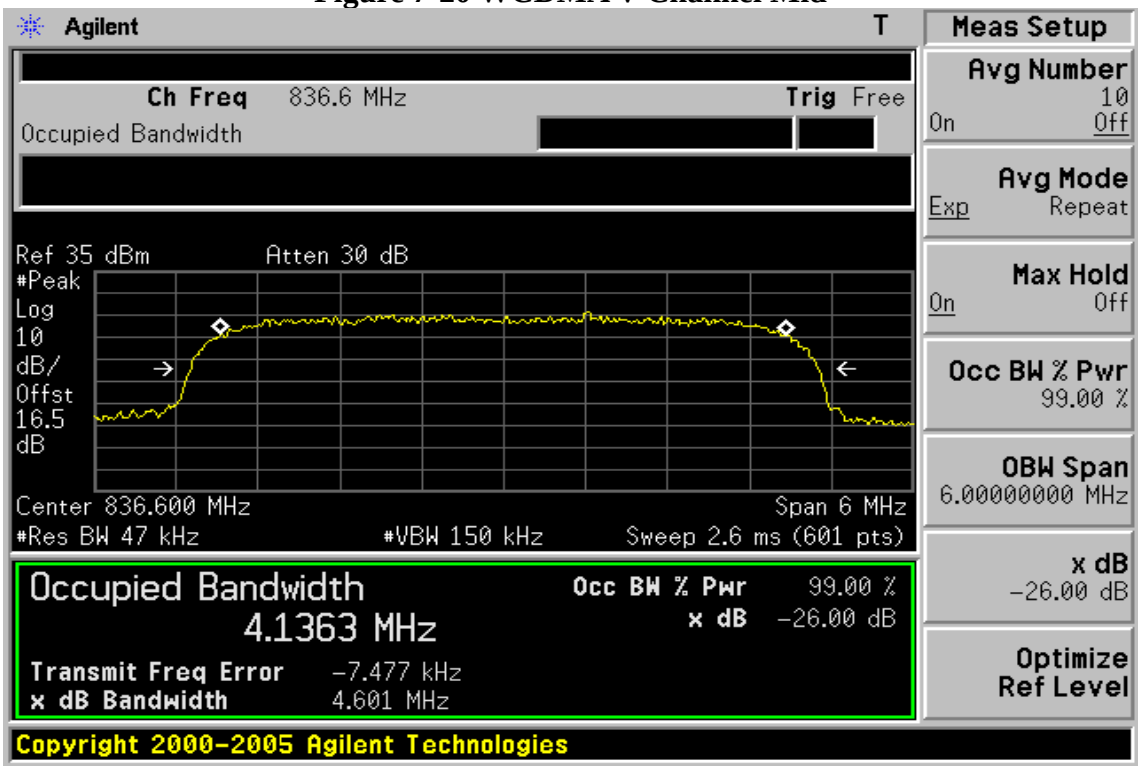

Figure 7-21 WCDMA V Channel High

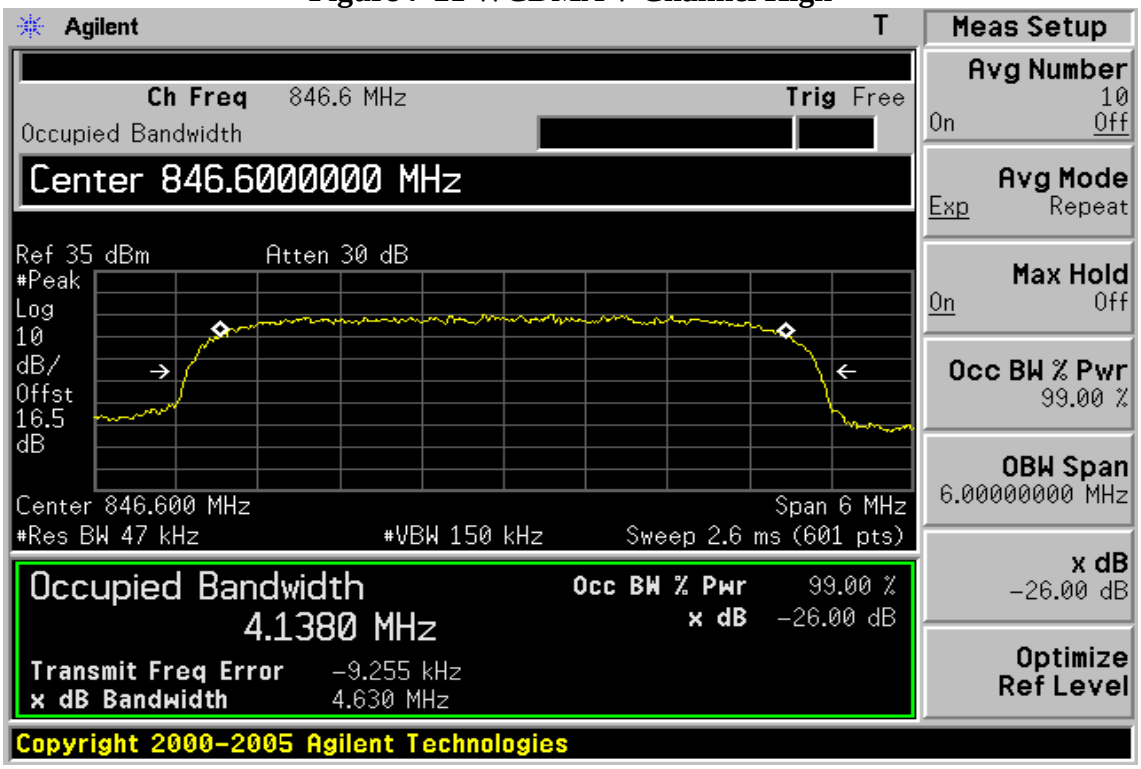

Figure 7-22 HSUPA V Channel Low

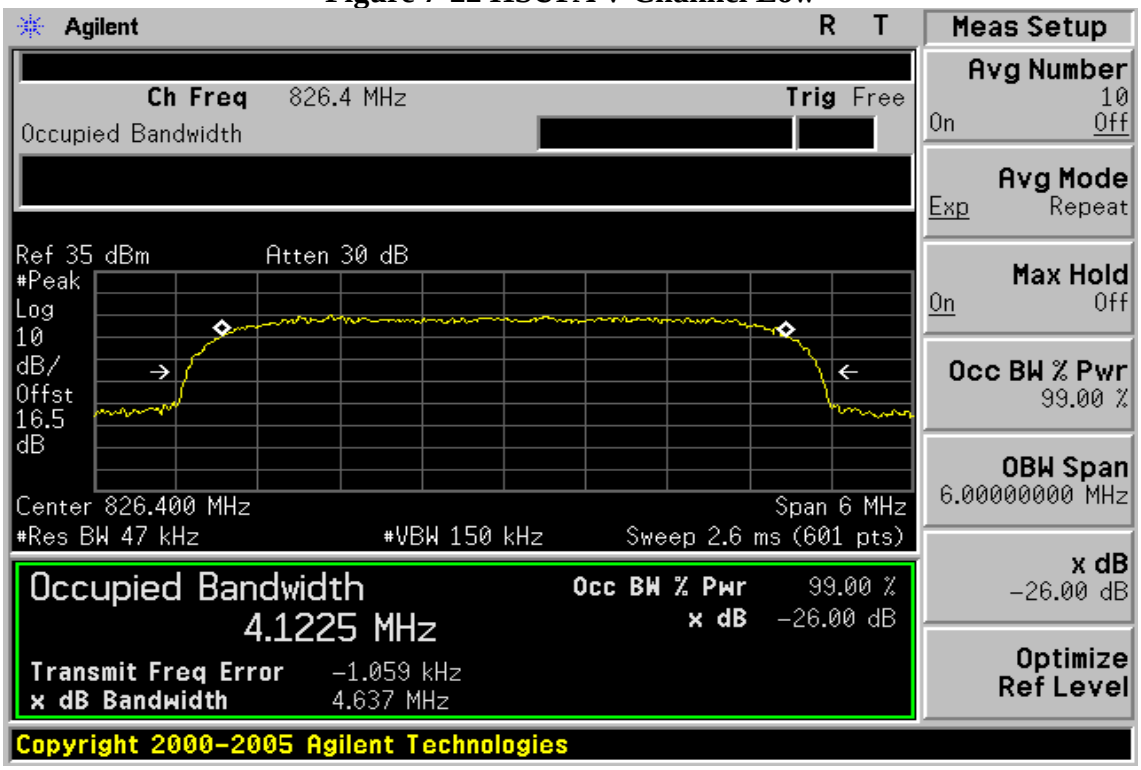

Figure 7-23 HSUPA V Channel Mid

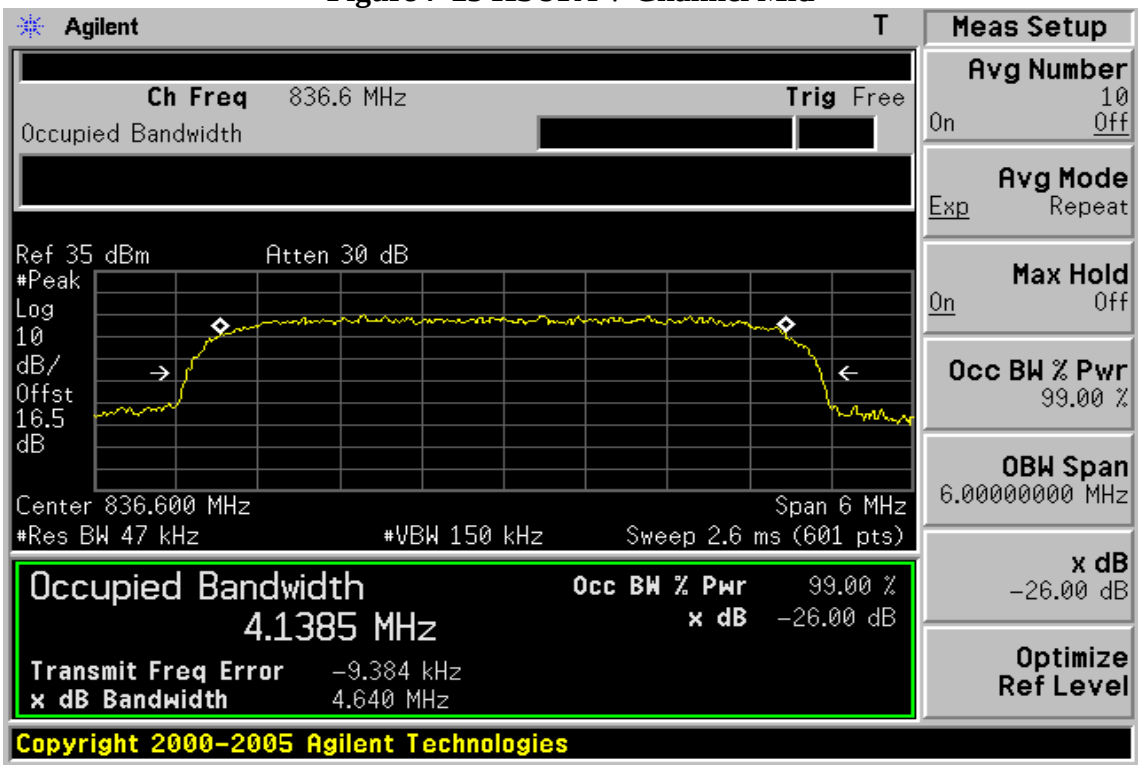

Figure 7-24 HSUPA V Channel High

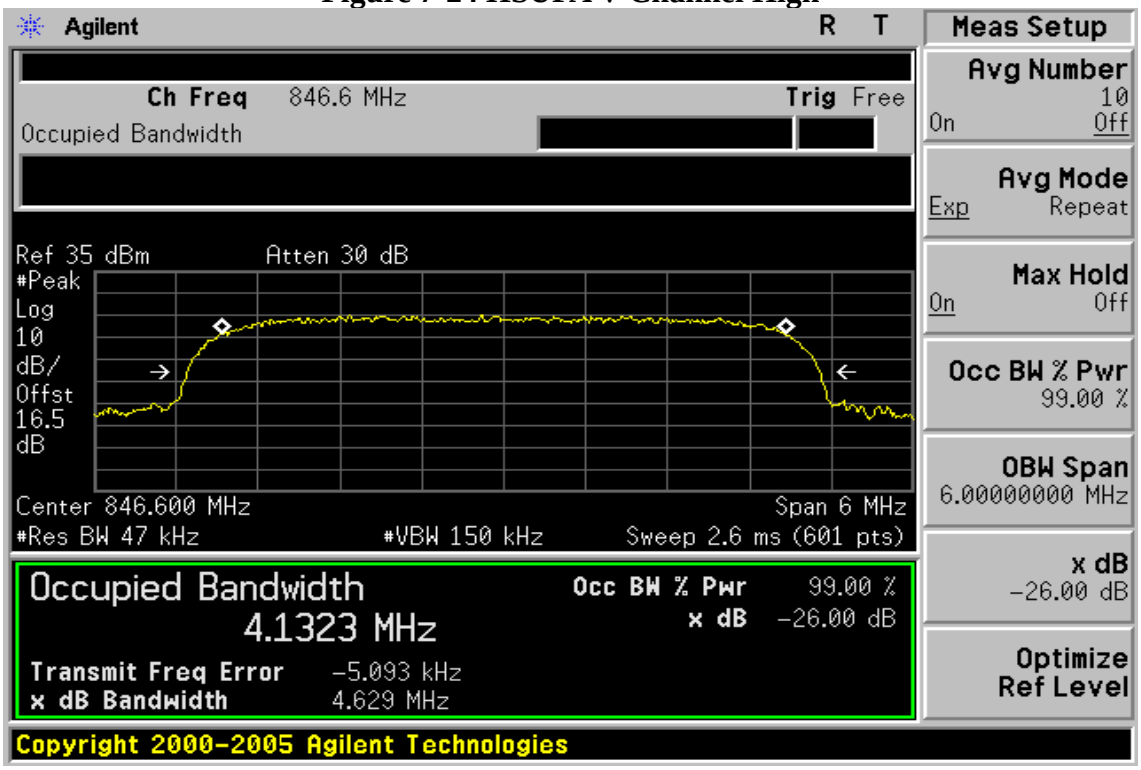

8. OUT OF BAND EMISSION AT ANTENNA TERMINALS

8.1. Standard Applicable:

According to FCC §2.1051.

FCC §22.917(a),§24.238(a) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

8.2. Test SET-UP:

Out of band emission

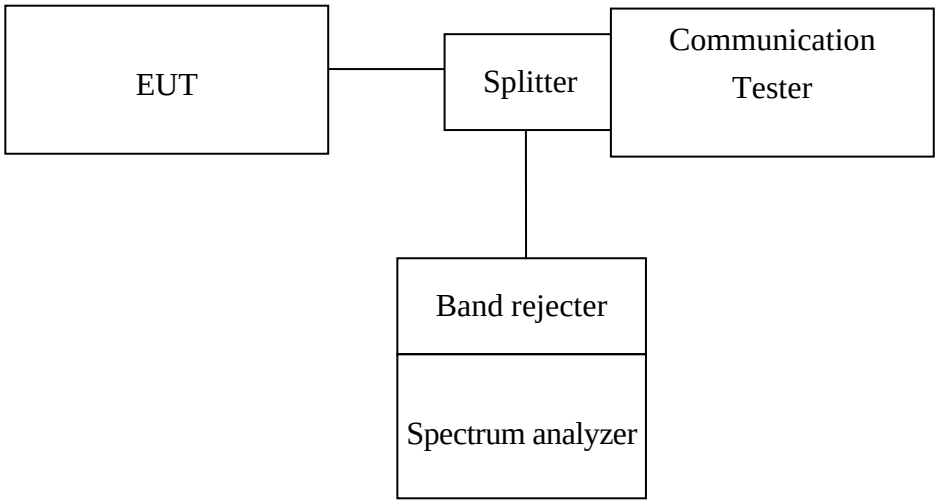

Band Edge

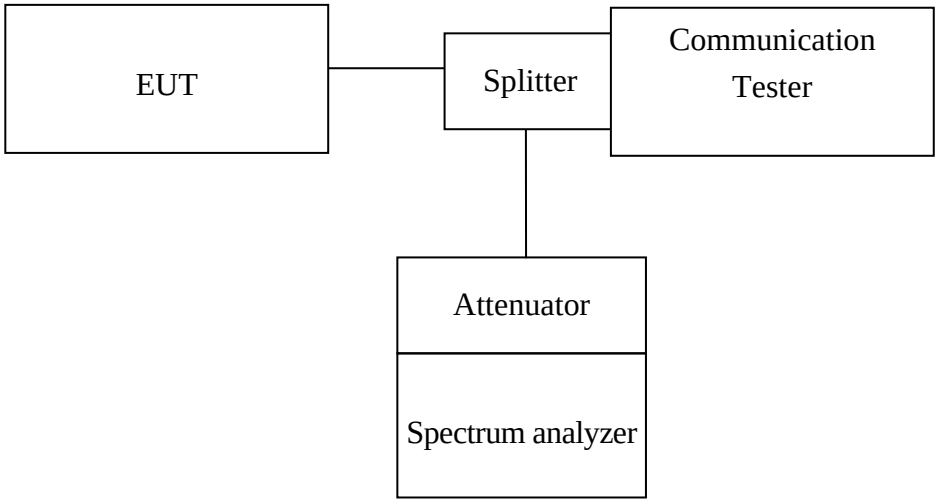

8.3. Measurement Procedure:

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10 th harmonic. Limit = -13dBm

Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

Conducted Emission:

1. To connect Antenna Port of EUT to Spectrum.
2. Set RBW = 1MHz & VBW = 1MHz on Spectrum.
3. Sweep the frequency to determine spurious emission as seen on spectrum from span of 30 to 1G, 1G to 2.5G, 2.5G to 7.5G, 7.5G to 10G ,10G to 15G and 15G to 20GHz
4. Via Software, combine 6 spans of frequency range into one plot

8.4. Measurement Equipment Used:

Refer to section 2.4 in this report

8.5. Measurement Result:

Figure 8-1: Out of Band emission at antenna terminals– GPRS 850 Channel Lowest

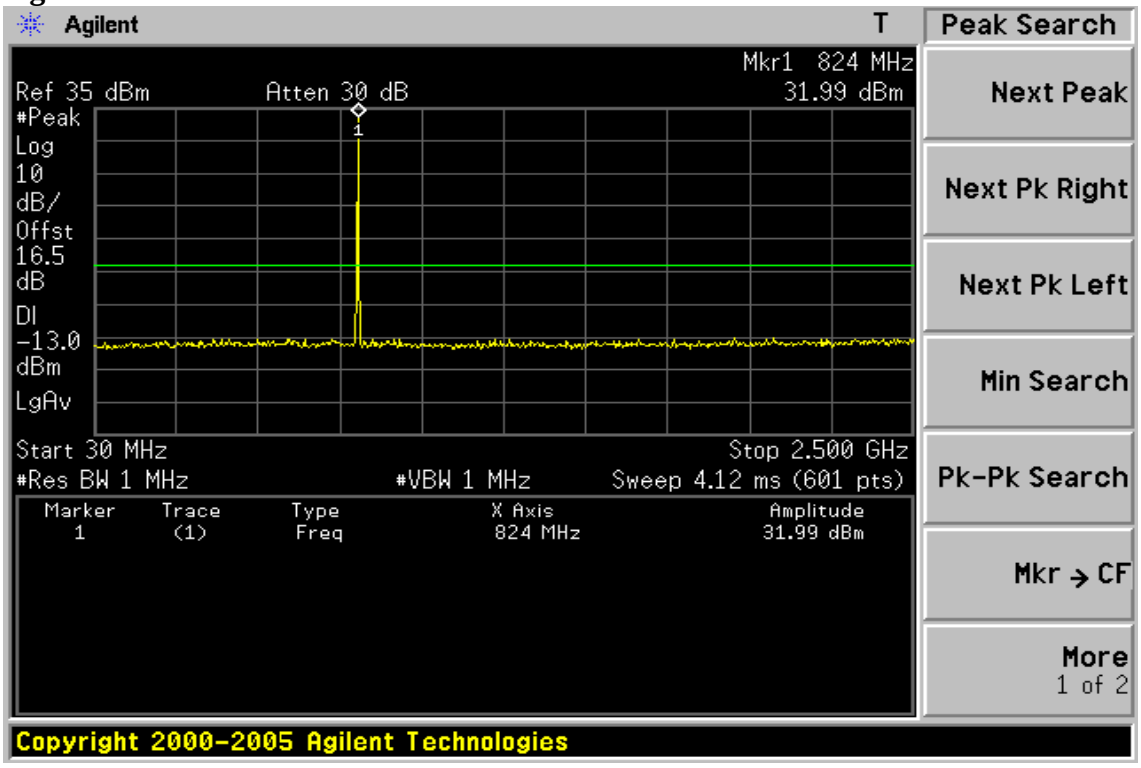

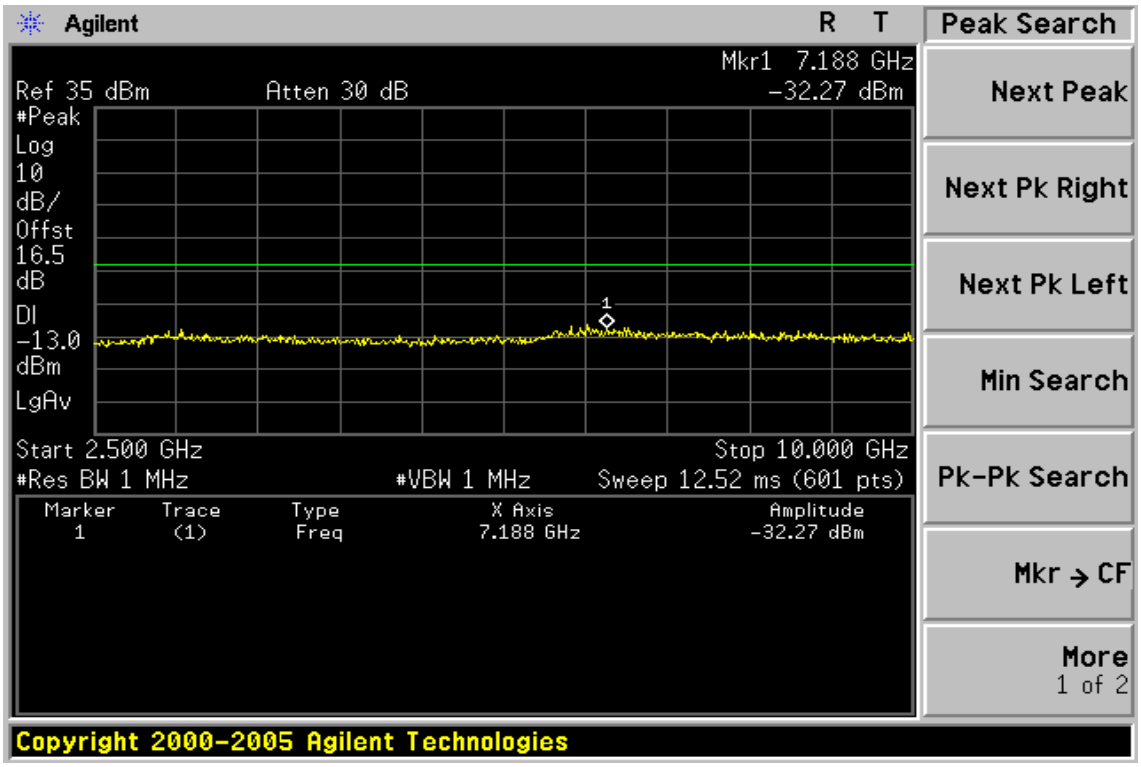

Figure 8-2: Out of Band emission at antenna terminals –GPRS 850 Channel Mid

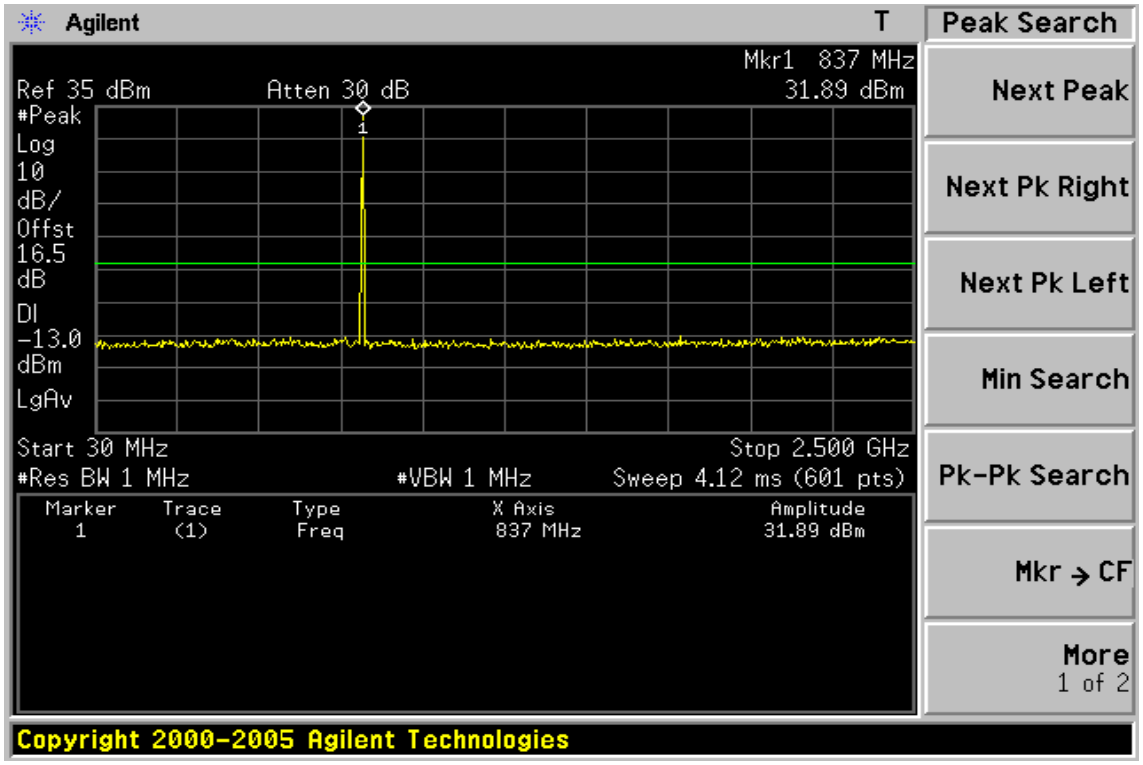

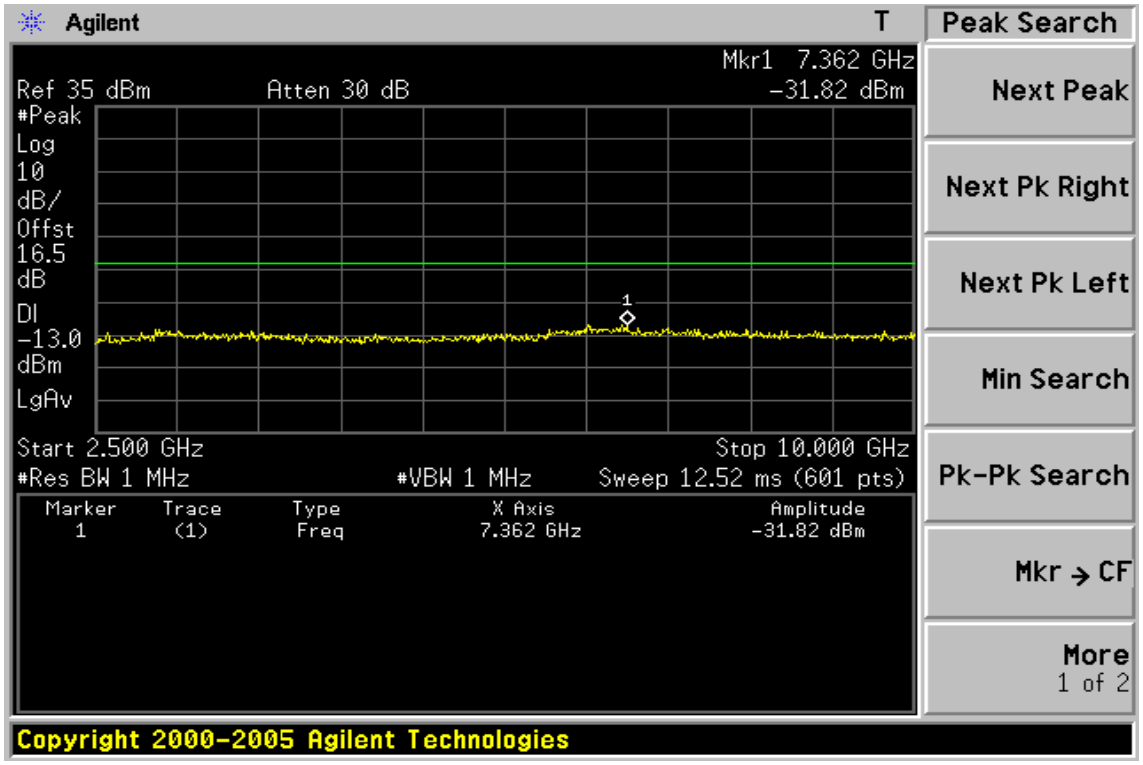

Figure 8-3: Out of Band emission at antenna terminals–GPRS 850 Channel Highest

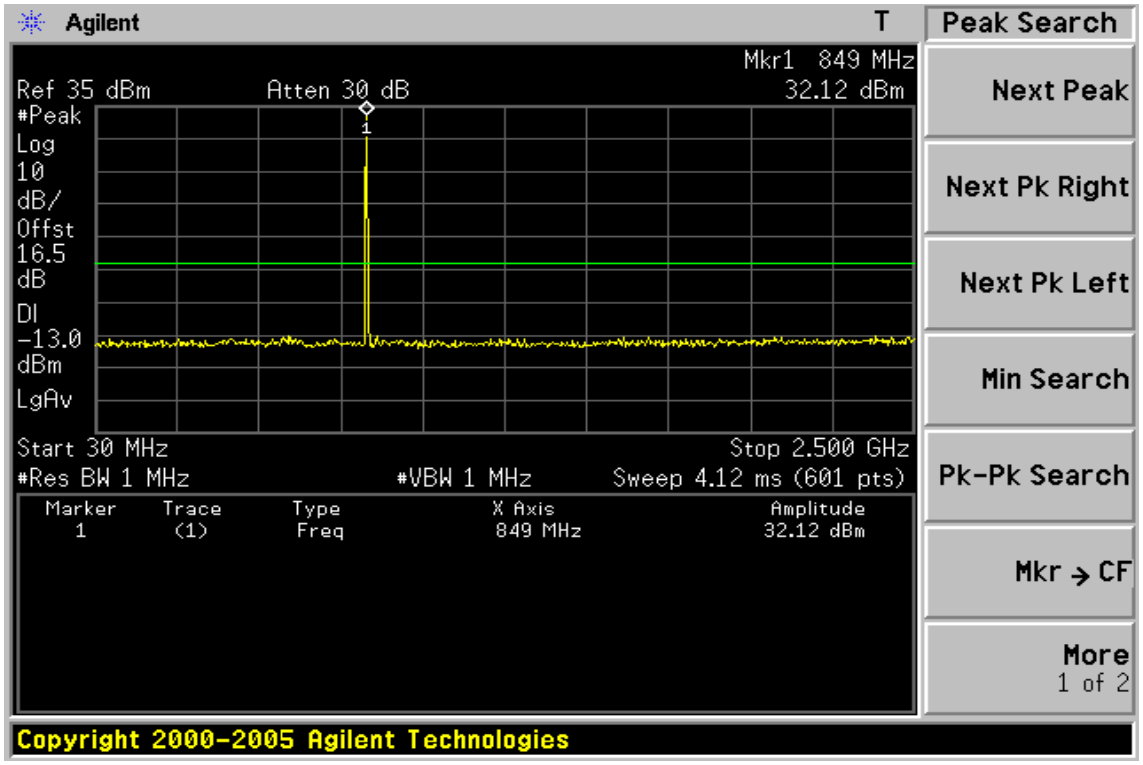

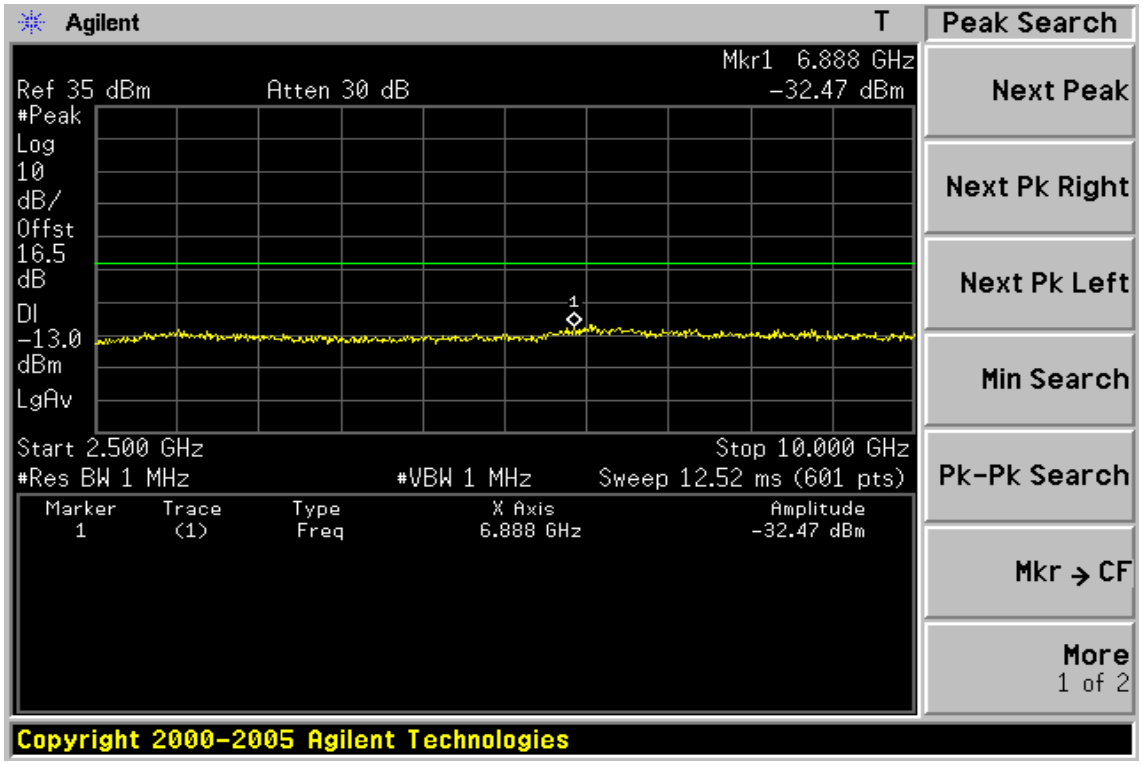

Figure 8-4: Band edge emission at antenna terminals –GPRS 850 Channel Lowest

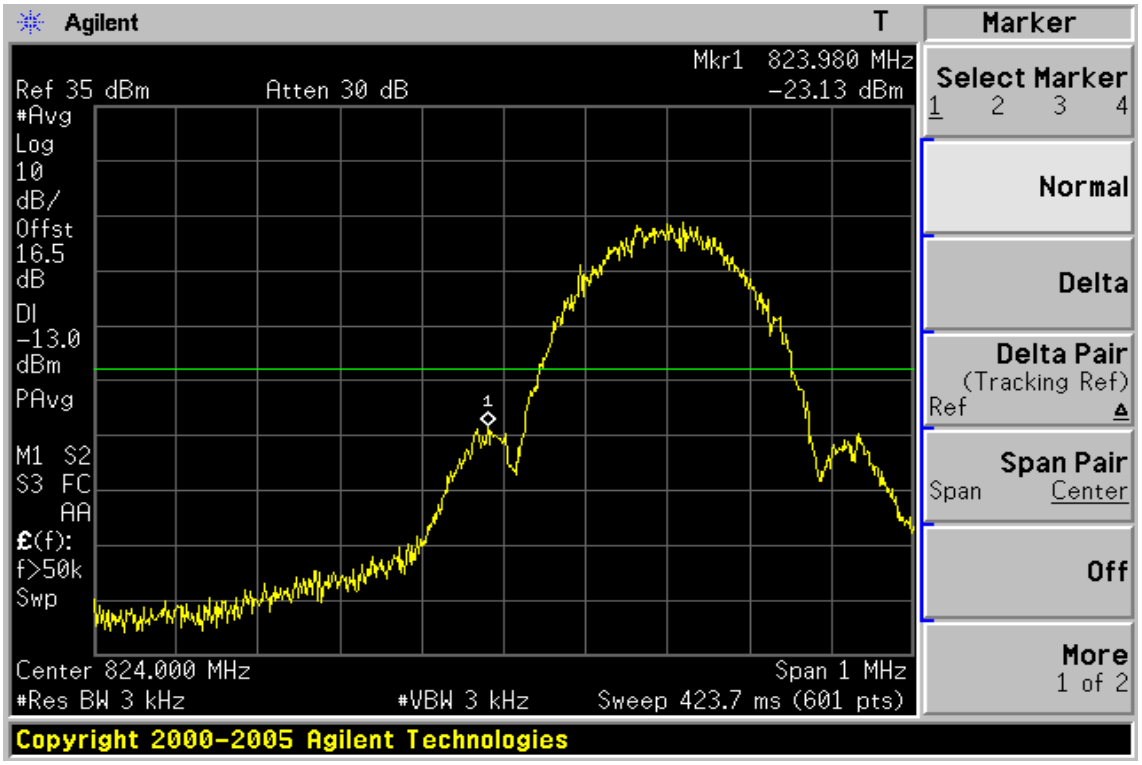

Figure 8-5: Band edge emission at antenna terminals –GPRS 850 Channel Highest

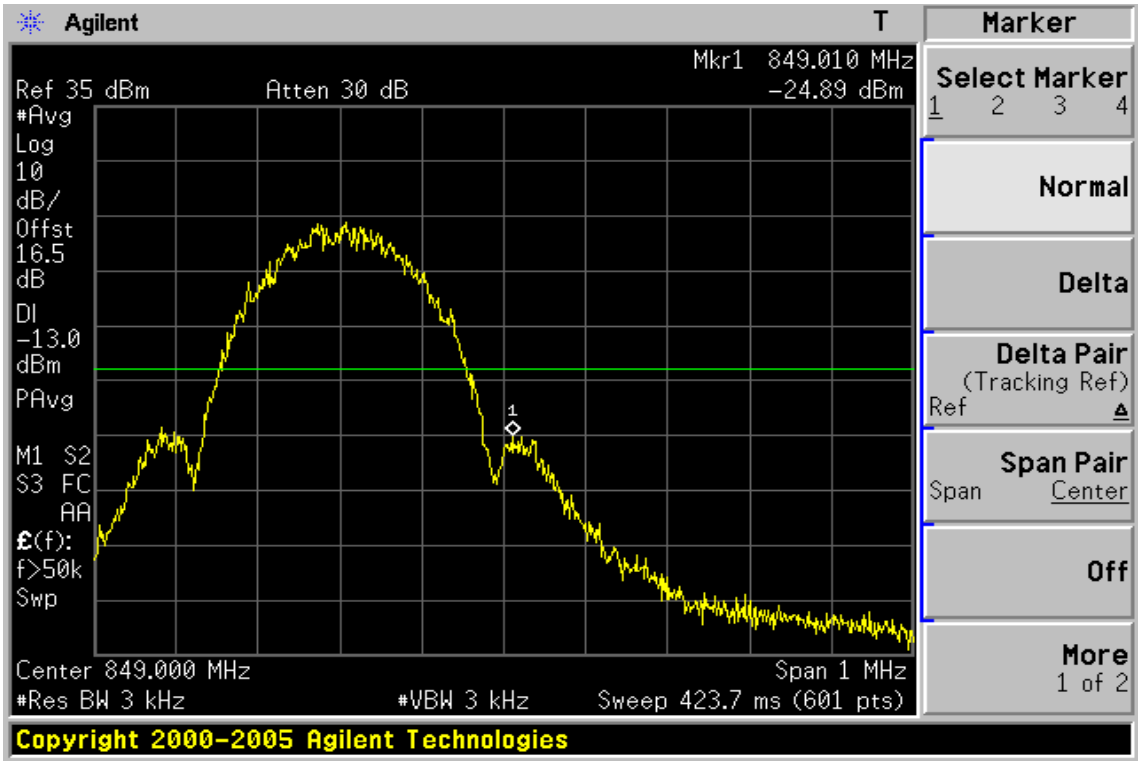

Figure 8-6: Out of Band emission at antenna terminals–GPRS 1900 Channel Lowest

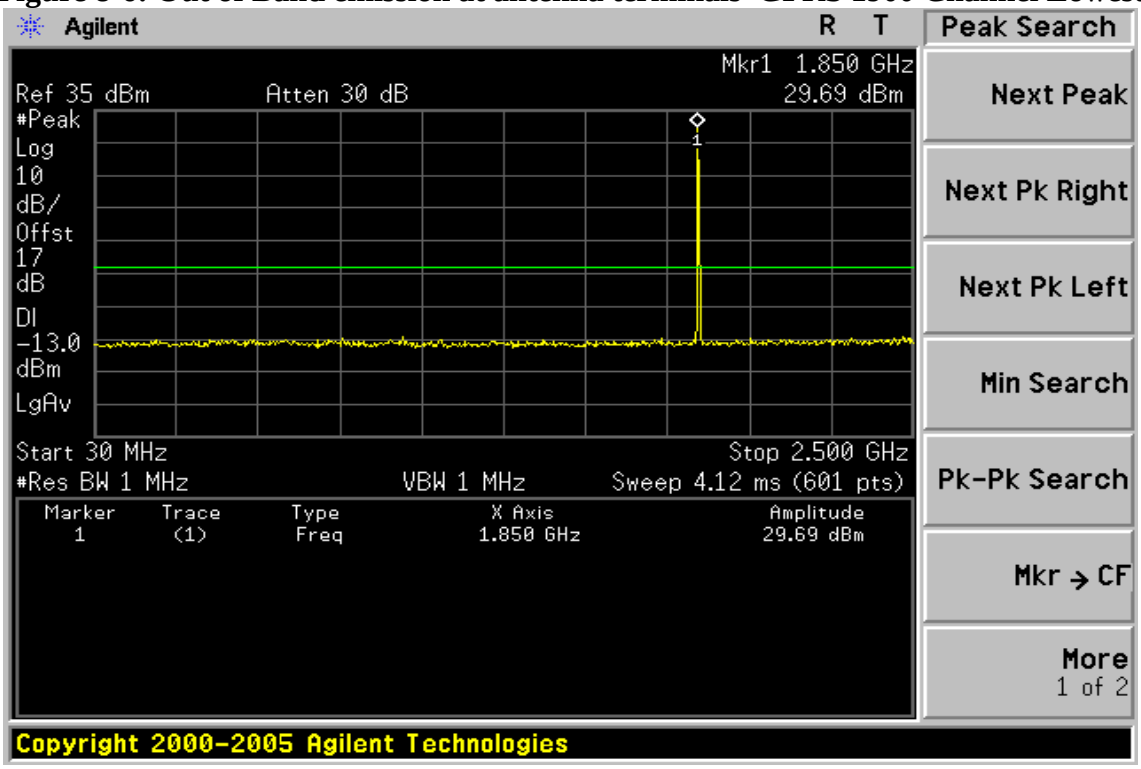

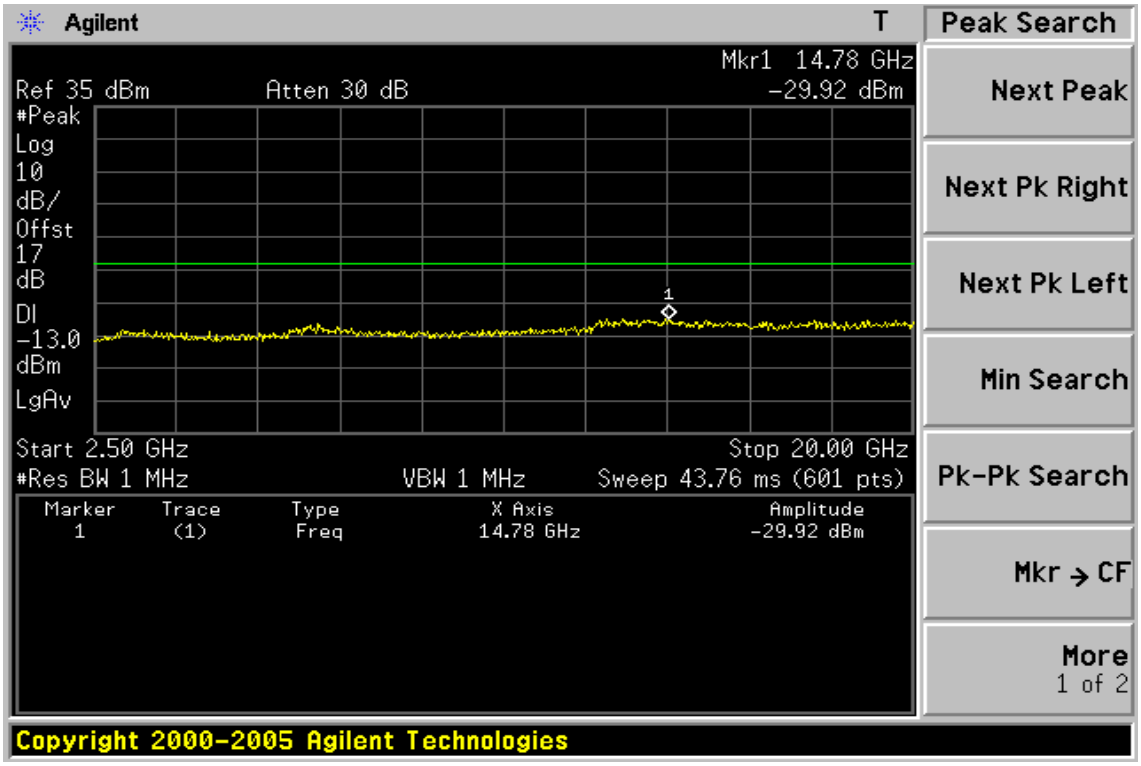

Figure 8-7: Out of Band emission at antenna terminals –GPRS 1900 Channel Mid

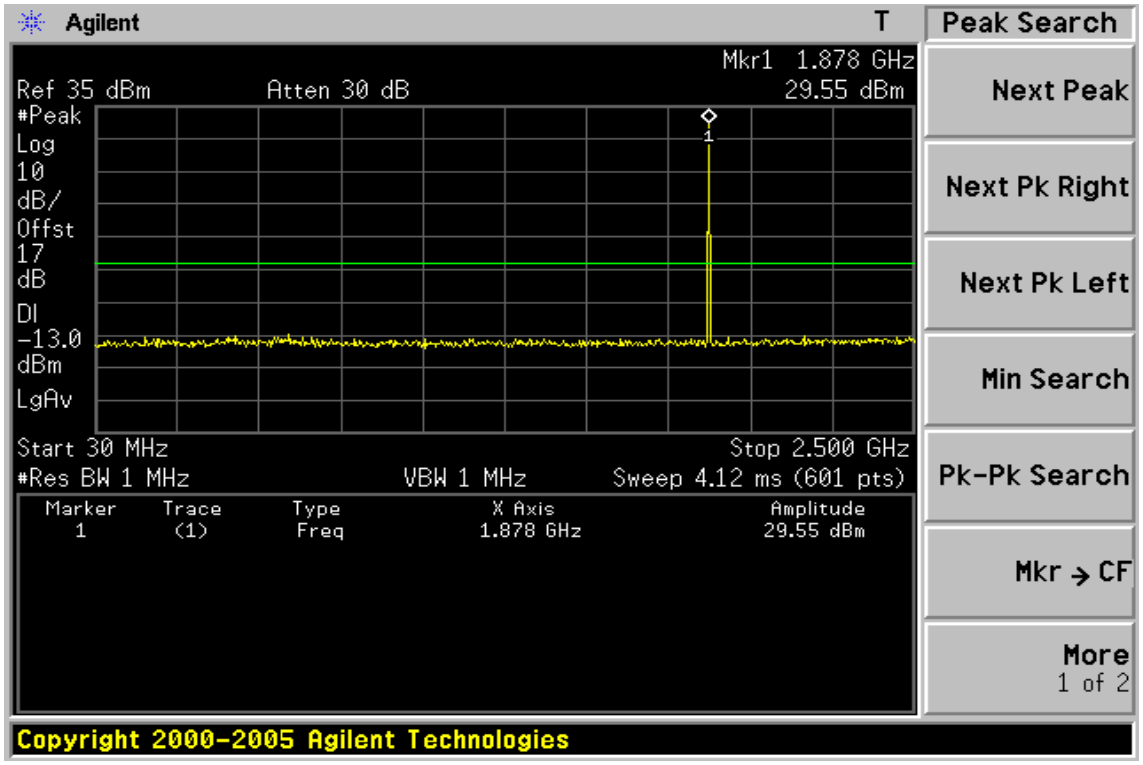

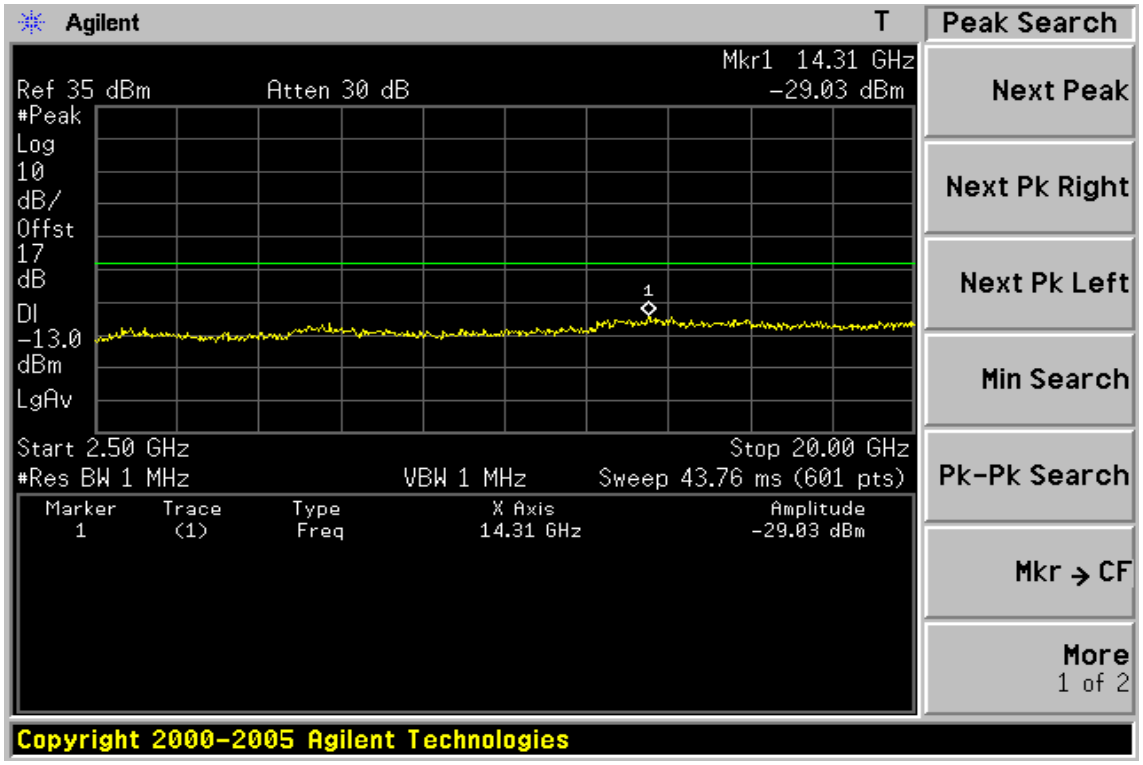

Figure 8-8: Out of Band emission at antenna terminals–GPRS 1900 Channel Highest

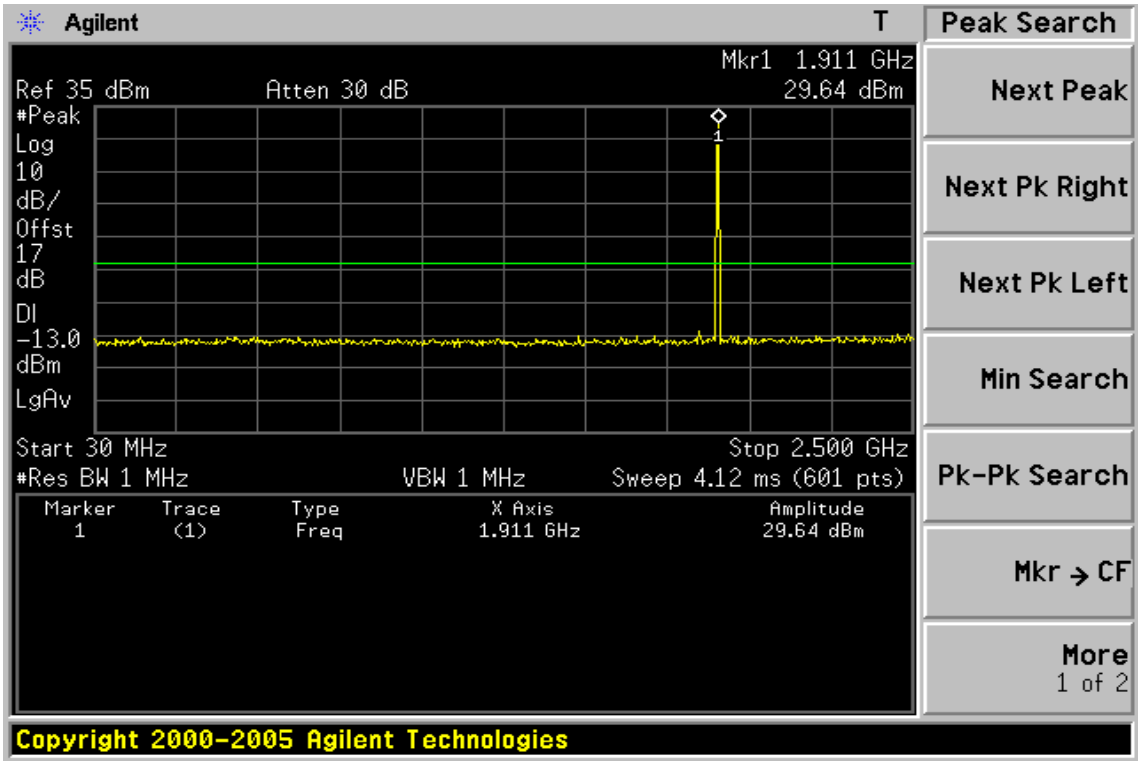

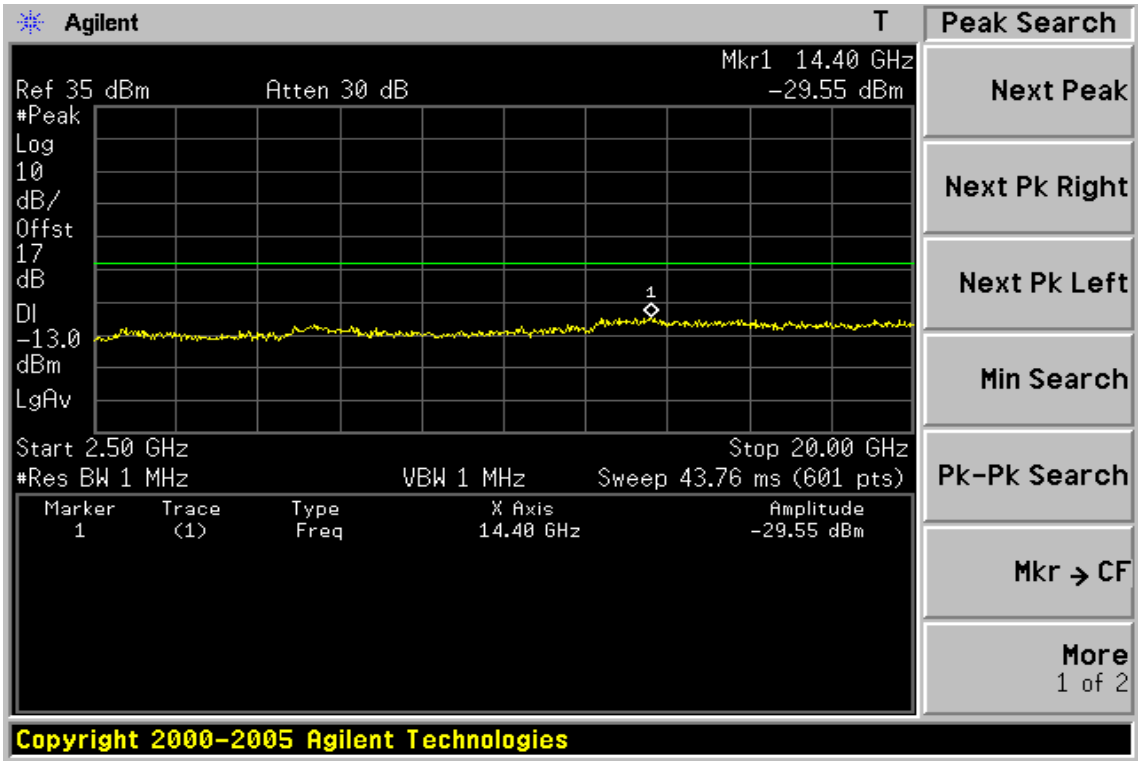

Figure 8-9: Bad edge emission at antenna terminals –GPRS 1900 Channel Lowest

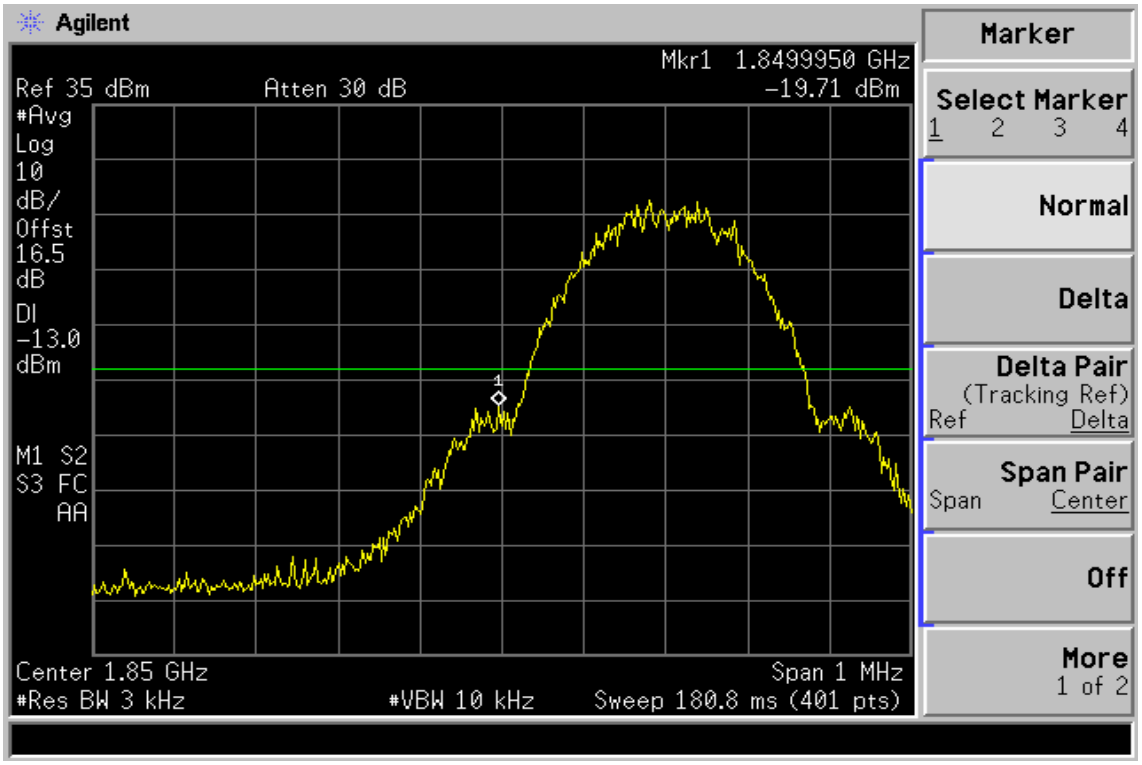

Figure 8-10: Band edge emission at antenna terminals –GPRS 1900 Channel Highest

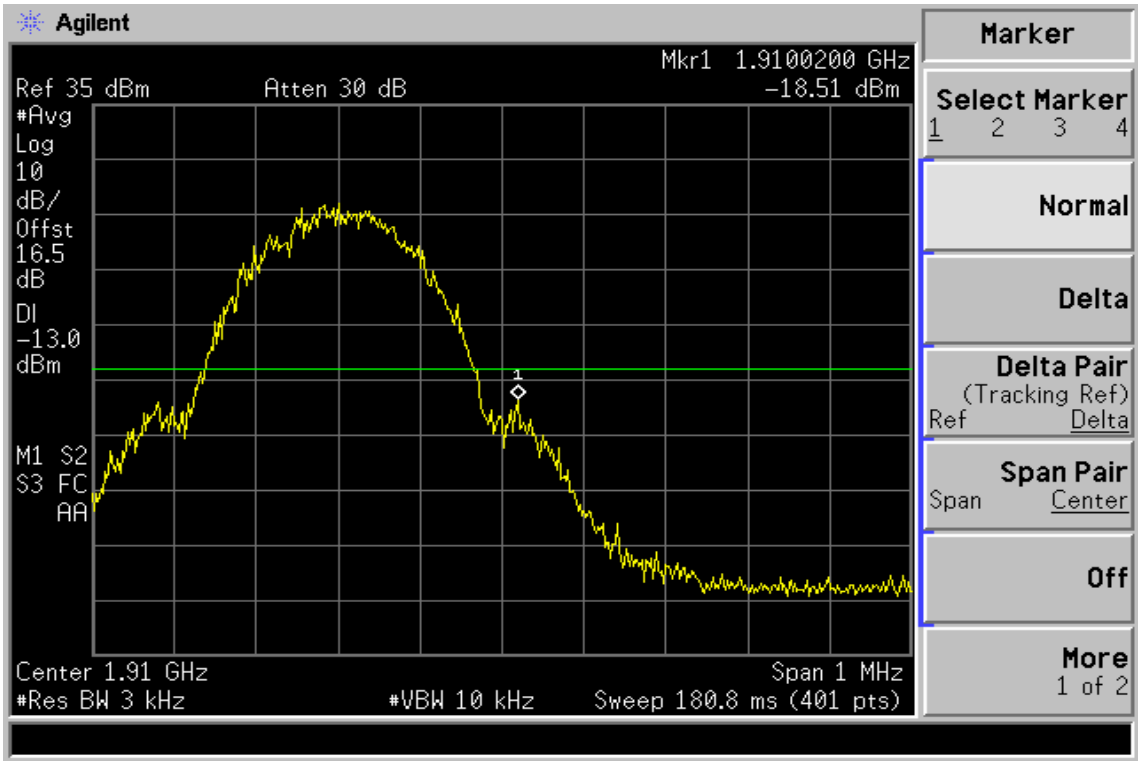

Figure 8-11: Out of Band emission at antenna terminals–WCDMA II Channel Lowest

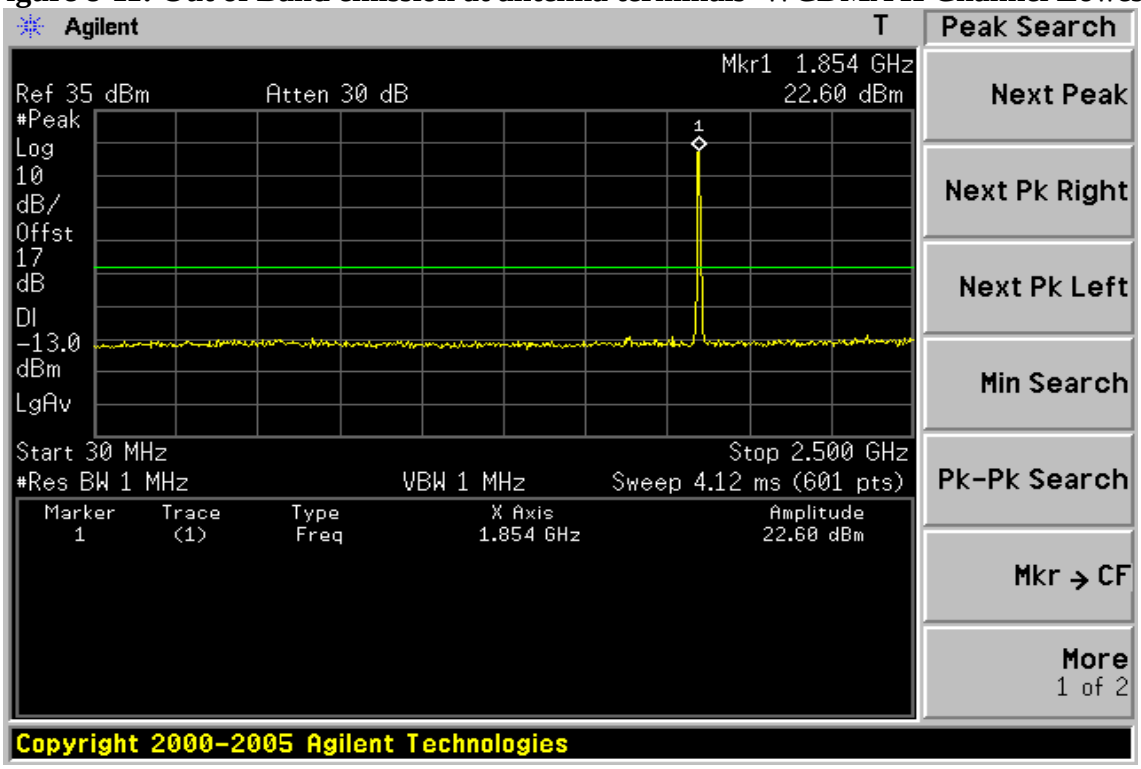

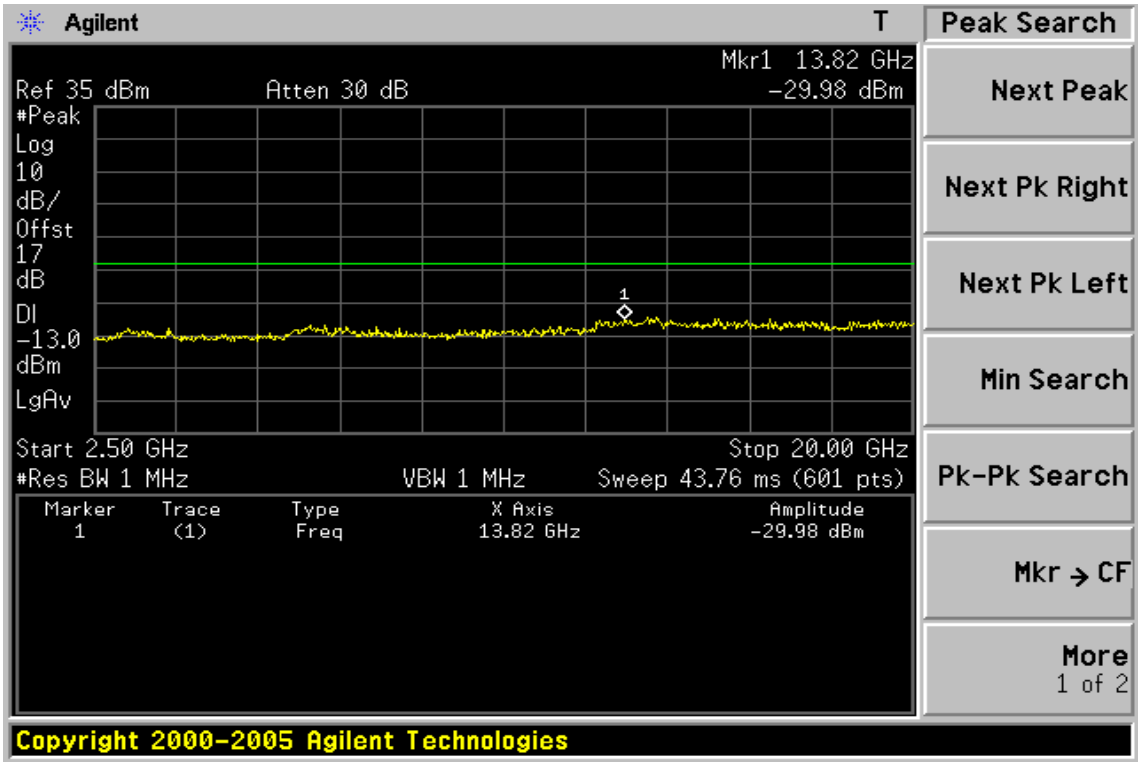

Figure 8-12: Out of Band emission at antenna terminals –WCDMA II Channel Mid

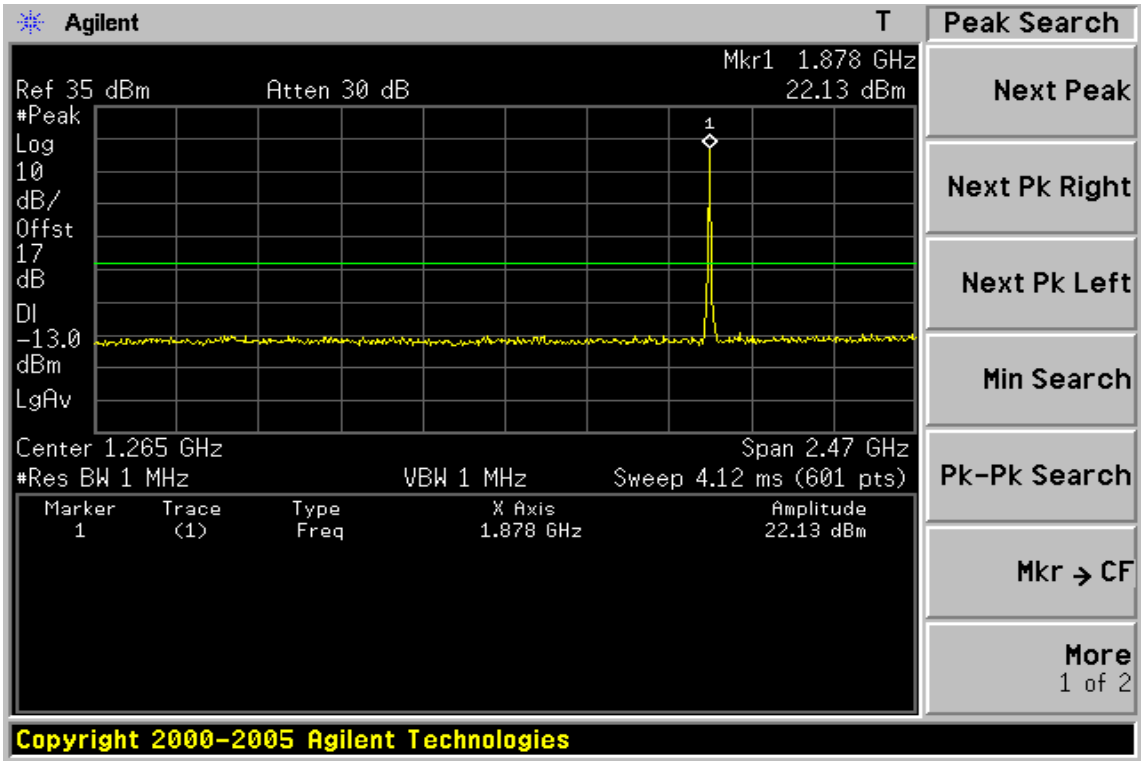

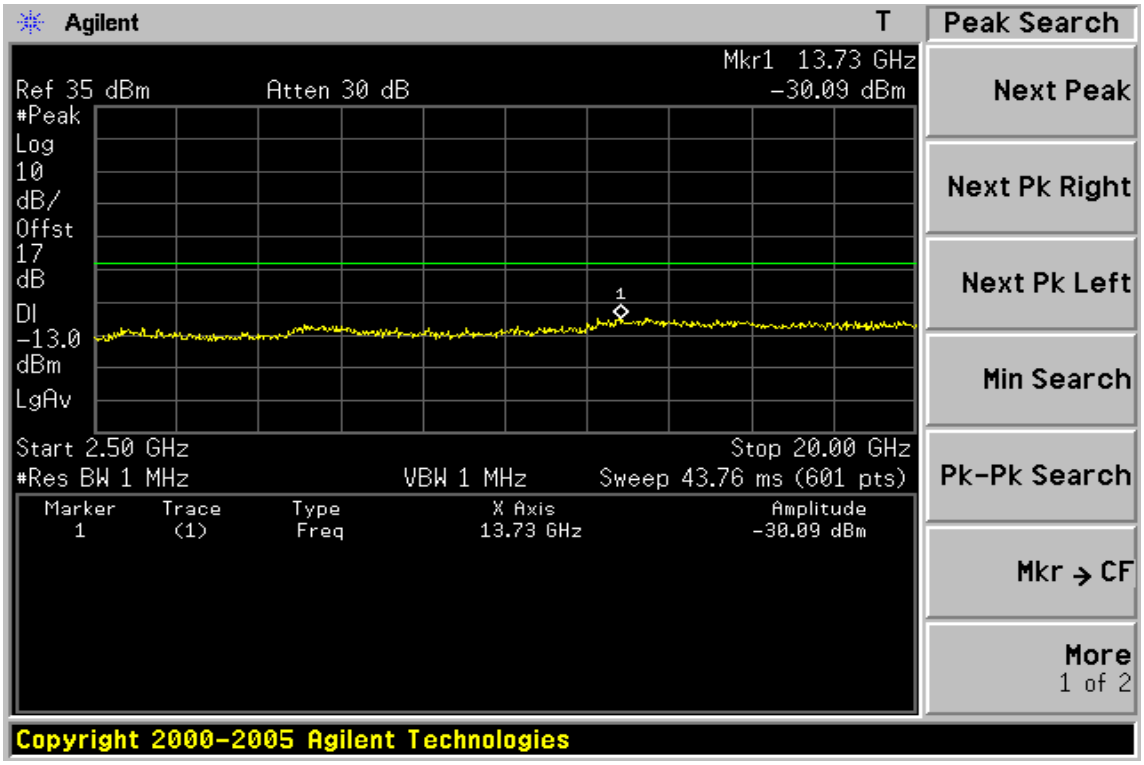

Figure 8-13: Out of Band emission at antenna terminals–WCDMA II Channel Highest

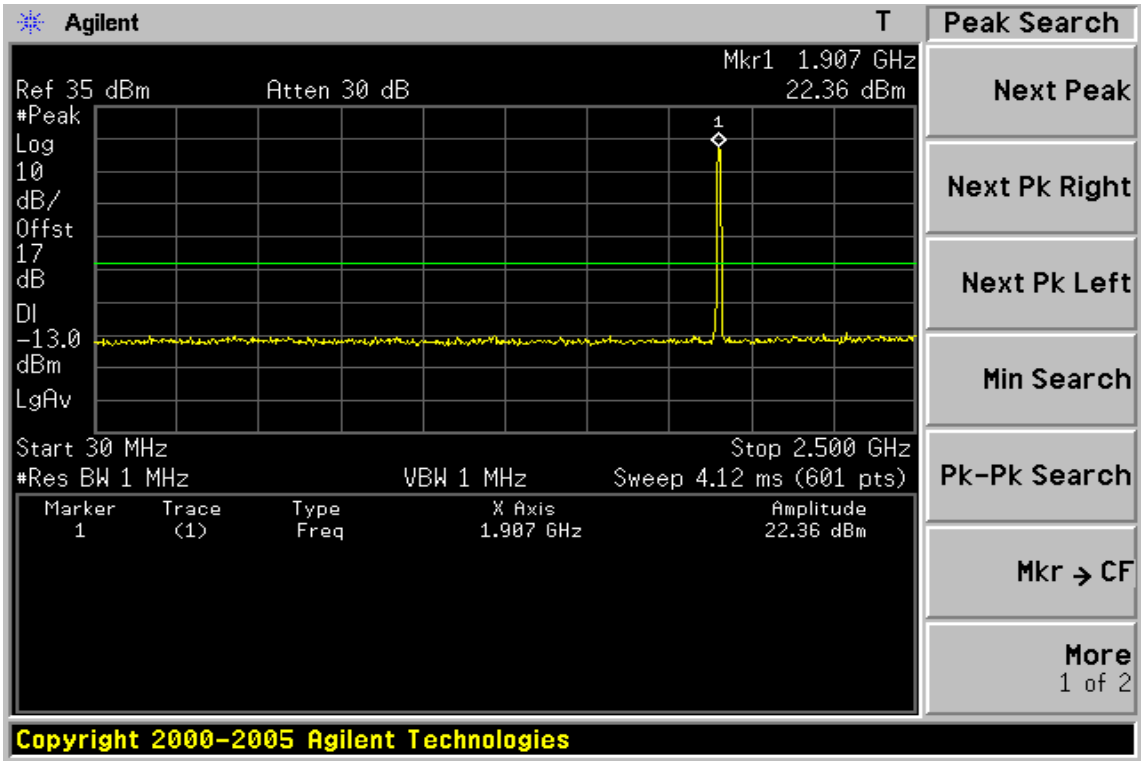

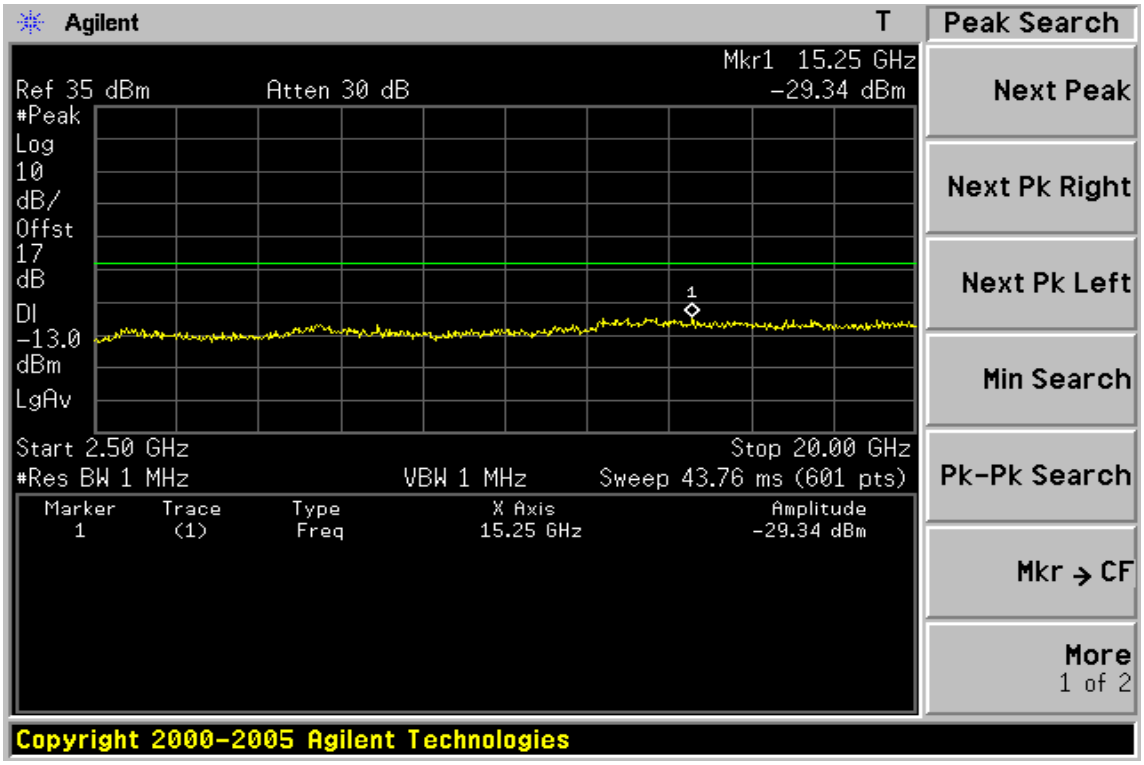

Figure 8-14: Bad edge emission at antenna terminals –WCDMA II Channel Lowest

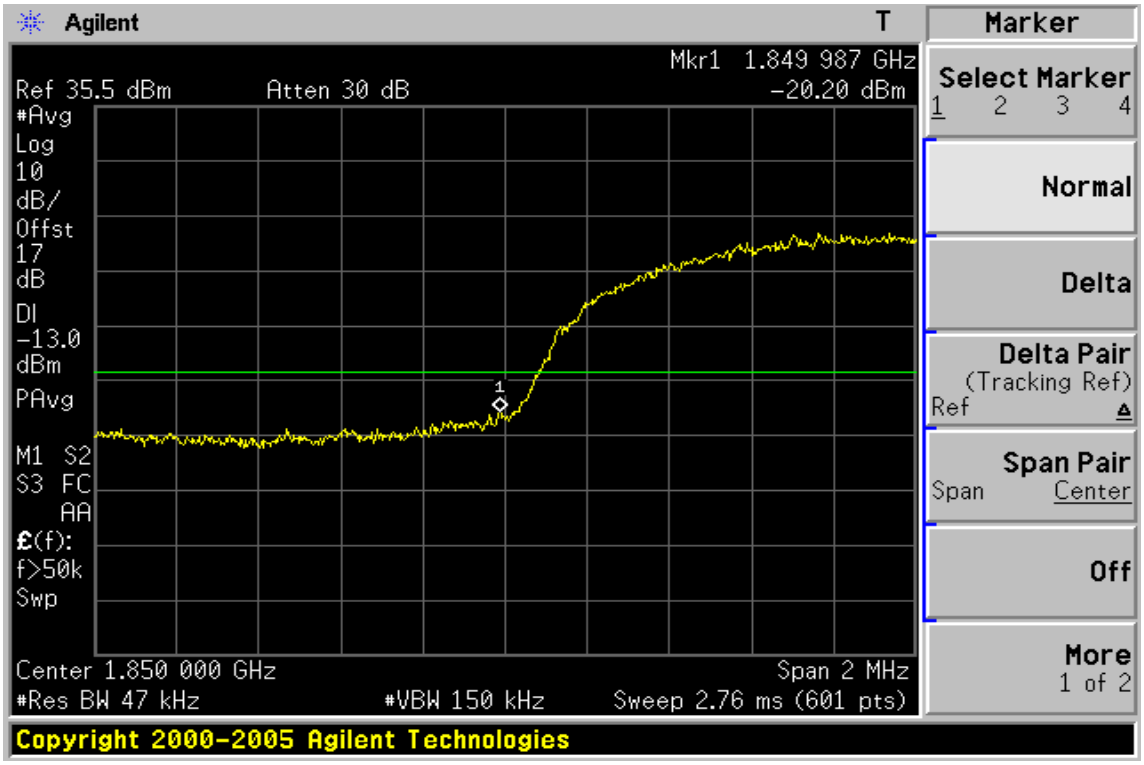

Figure 8-15: Band edge emission at antenna terminals –WCDMA II Channel Highest

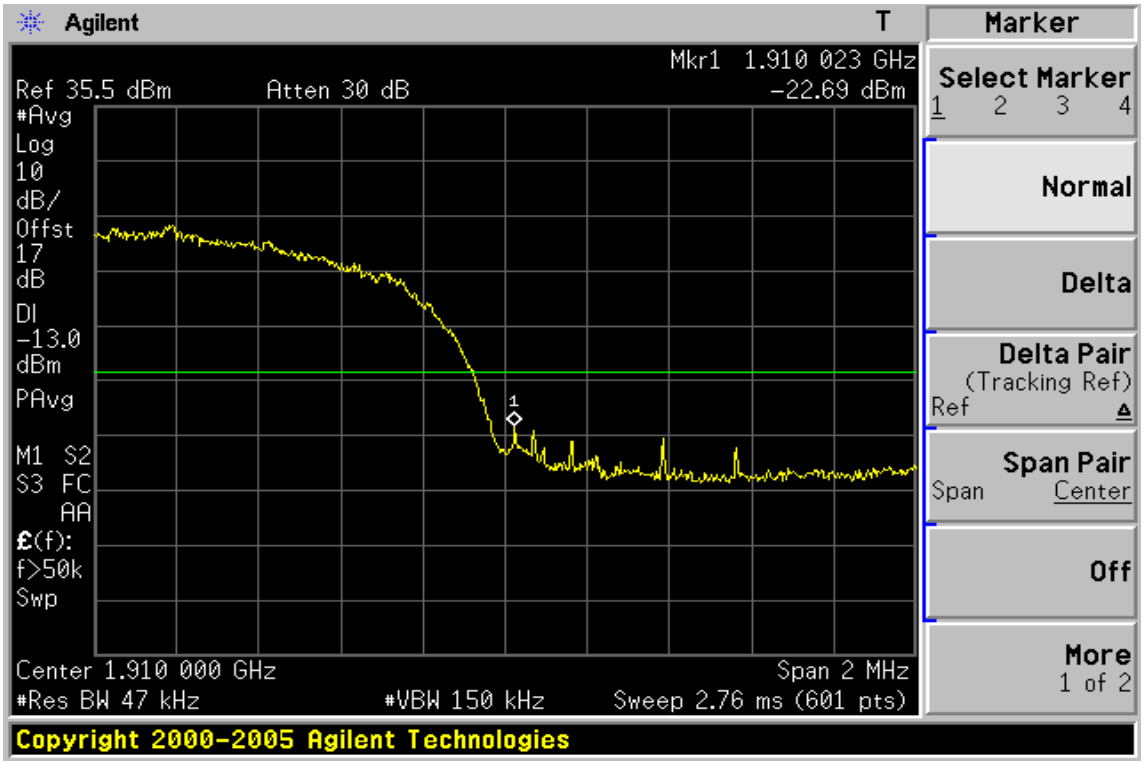

Figure 8-16: Out of Band emission at antenna terminals–WCDMA V Channel Lowest

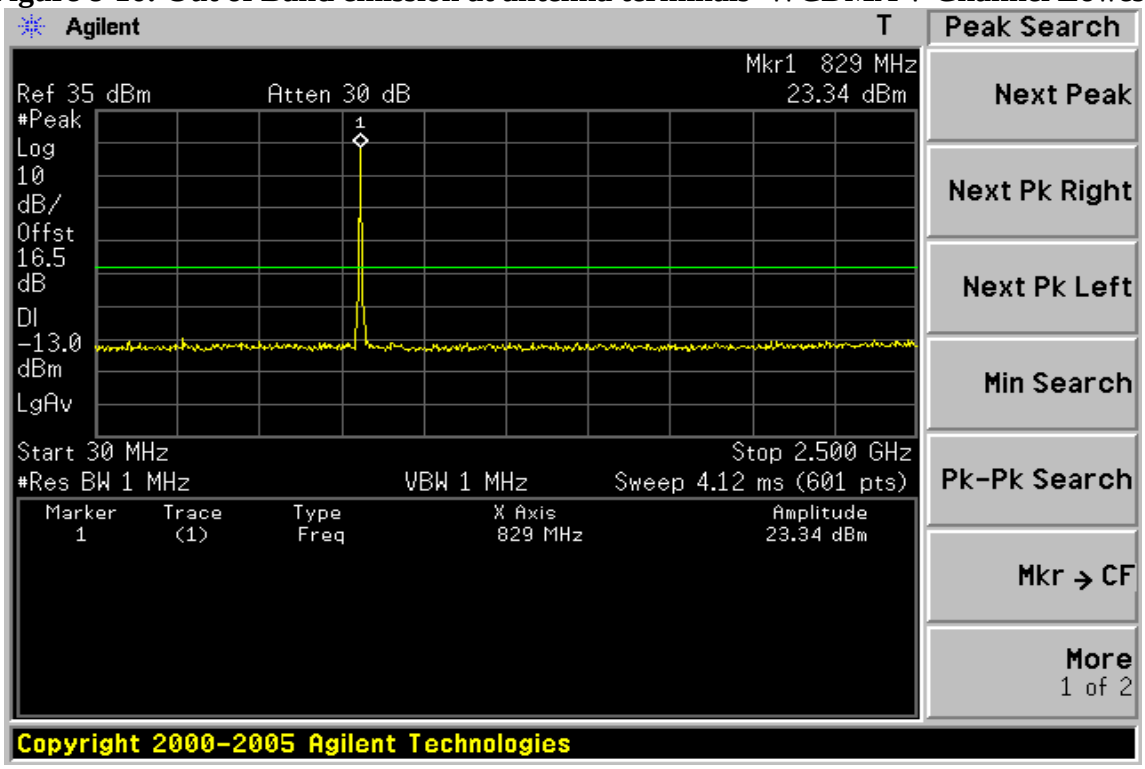

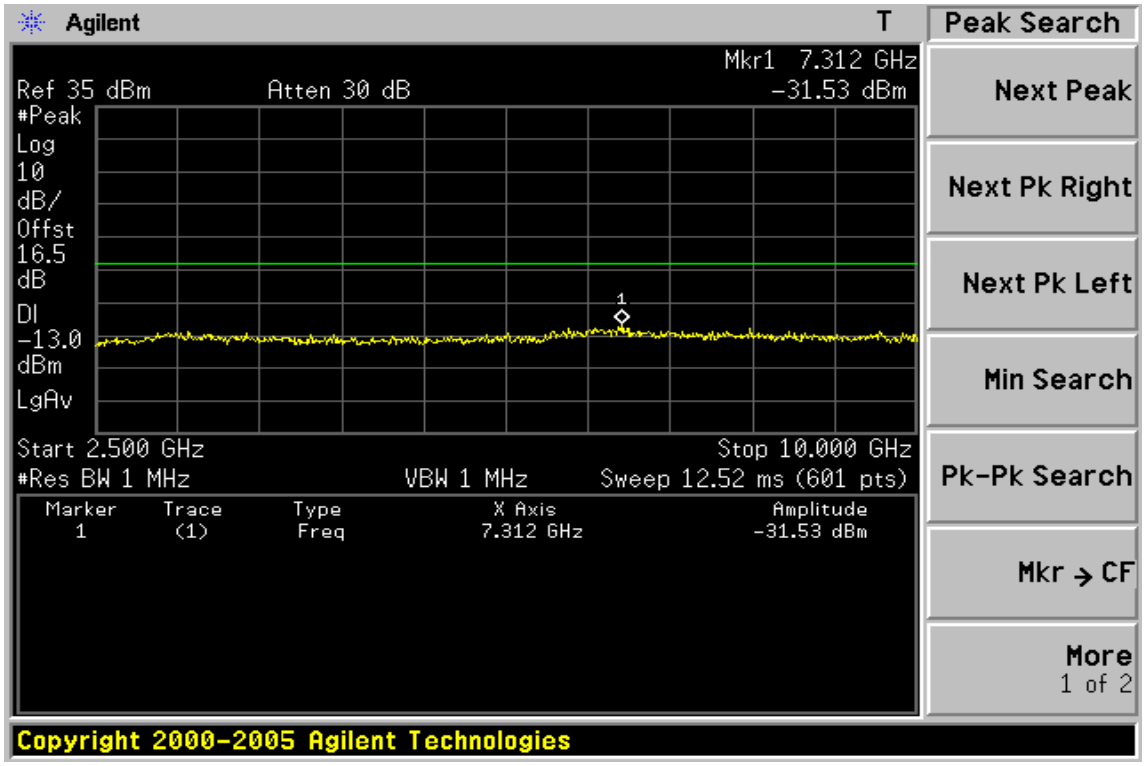

Figure 8-17: Out of Band emission at antenna terminals –WCDMA V Channel Mid

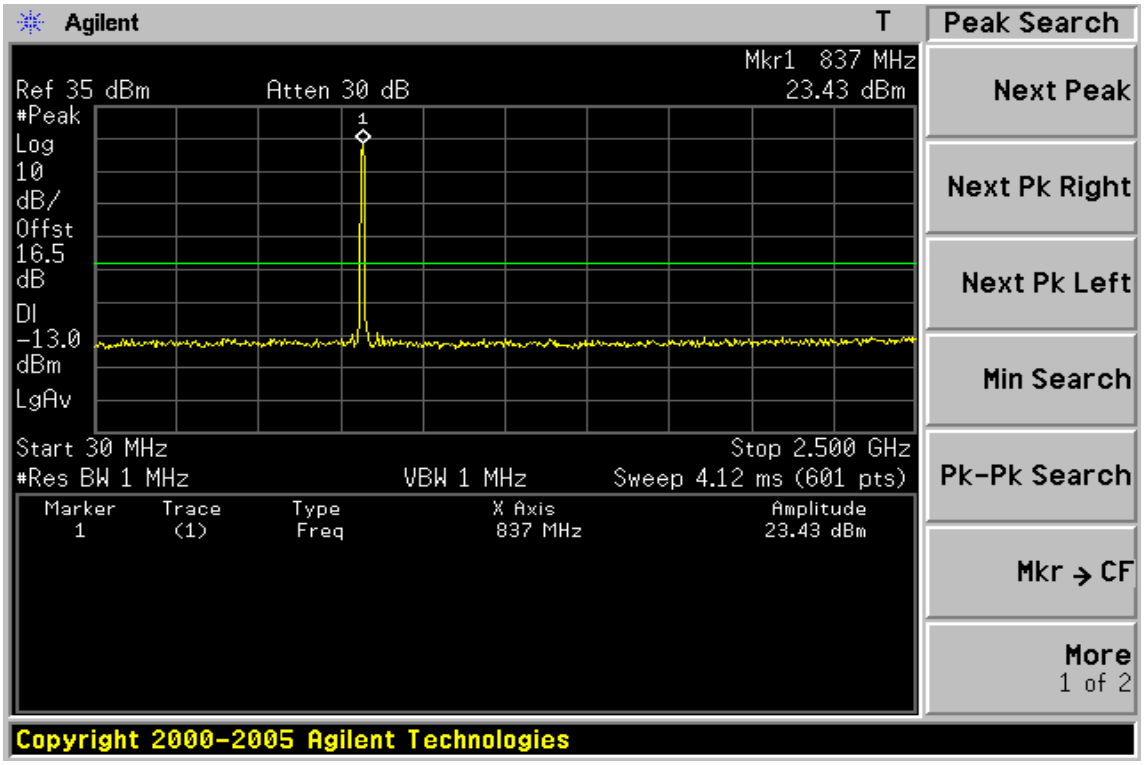

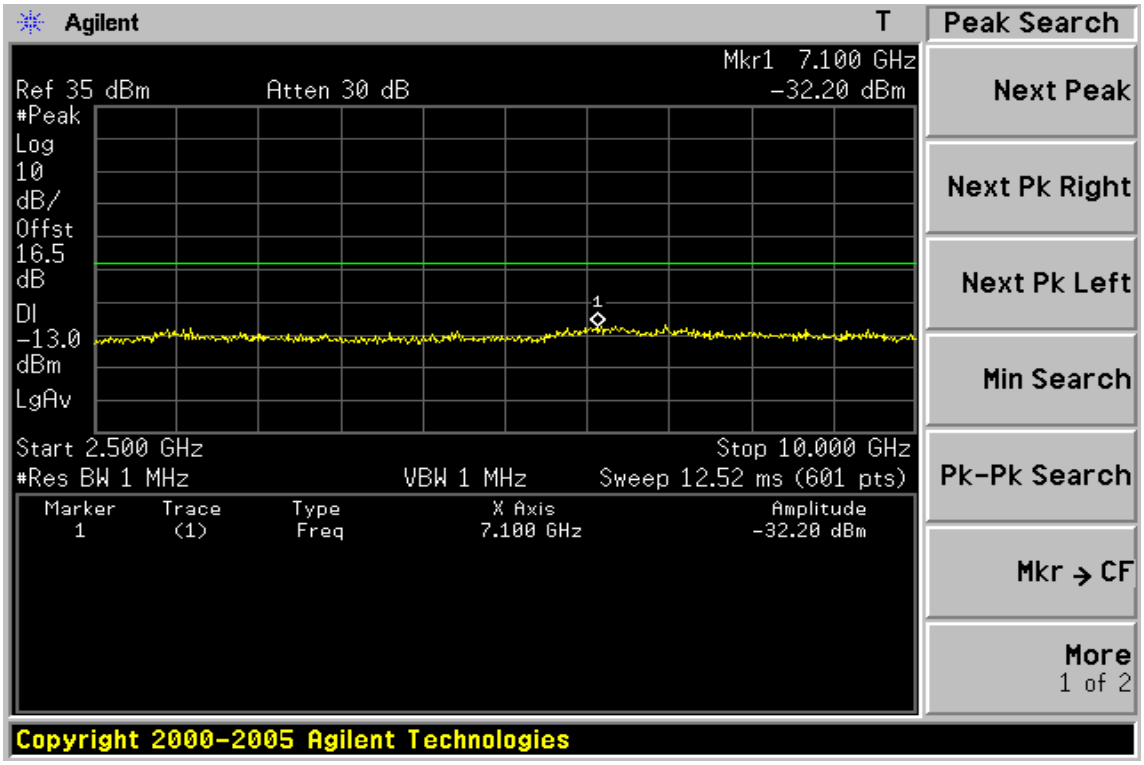

Figure 8-18: Out of Band emission at antenna terminals–WCDMA V Channel Highest

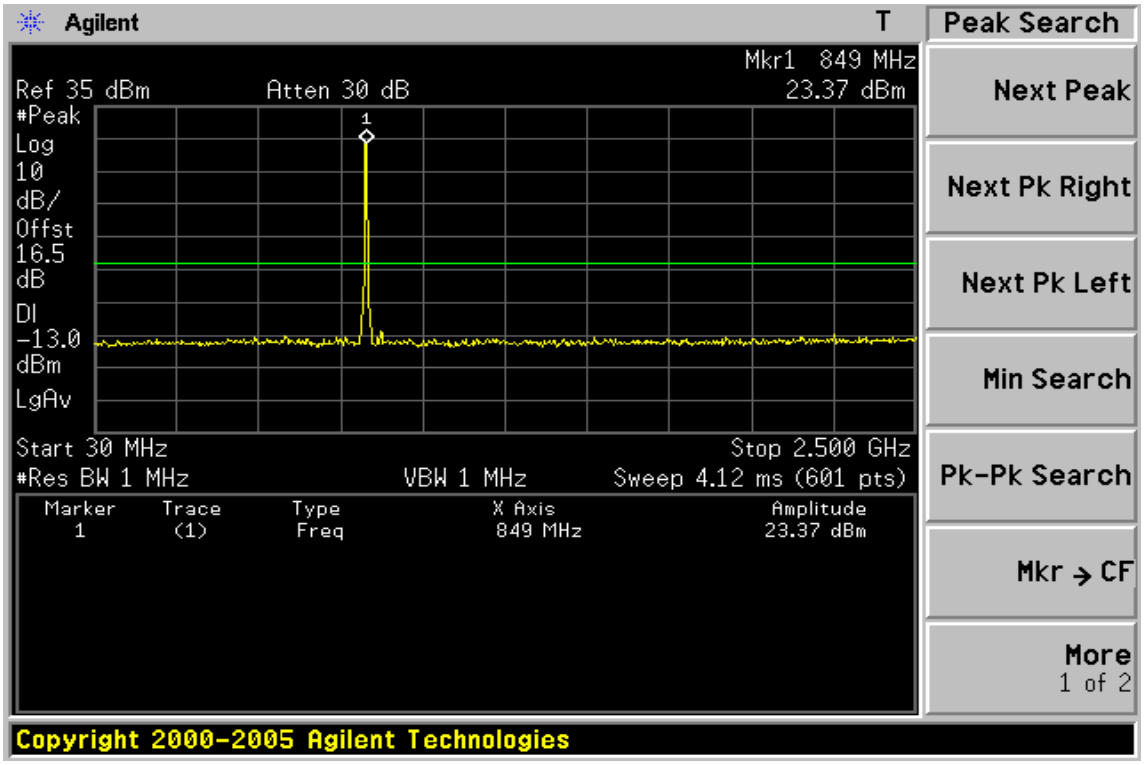

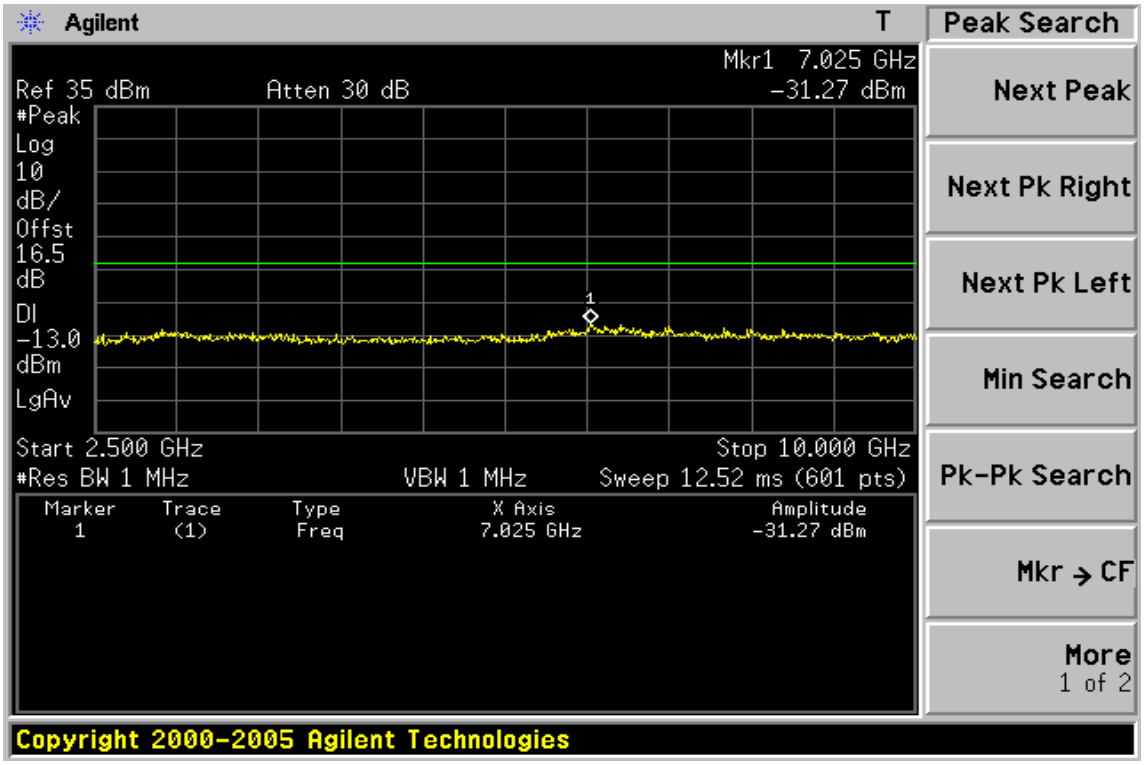

Figure 8-19: Bad edge emission at antenna terminals –WCDMA V Channel Lowest

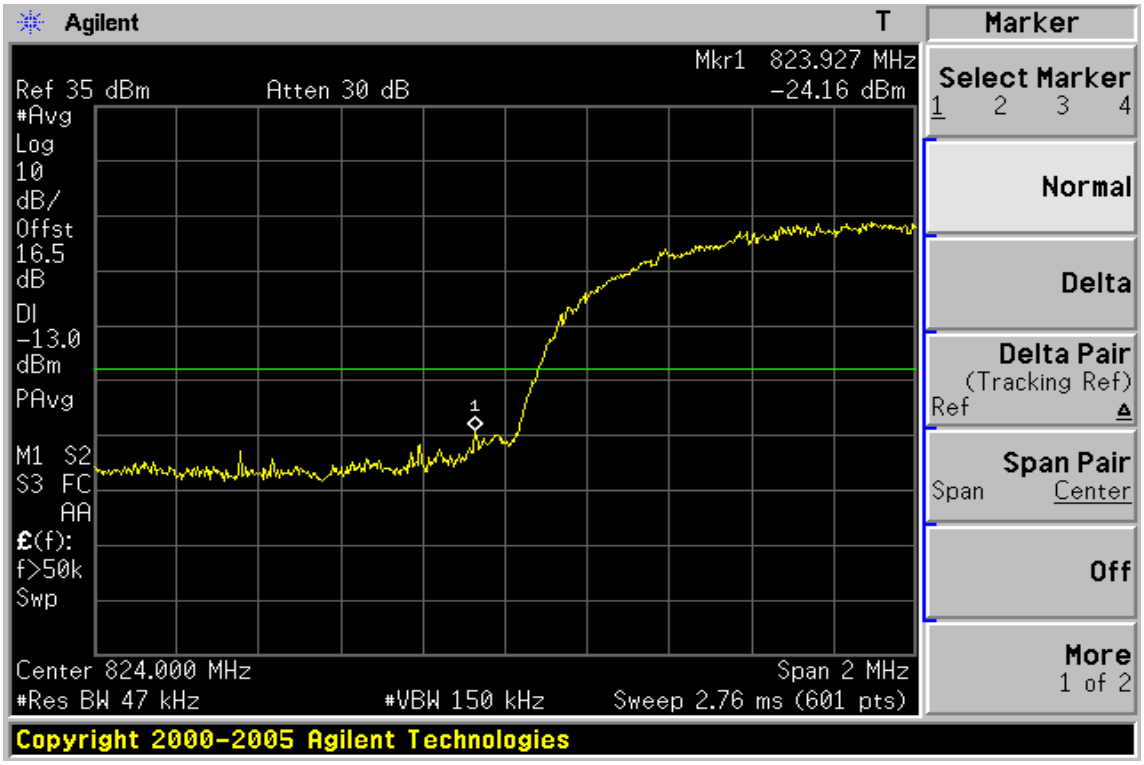

Figure 8-20: Band edge emission at antenna terminals –WCDMA V Channel Highest

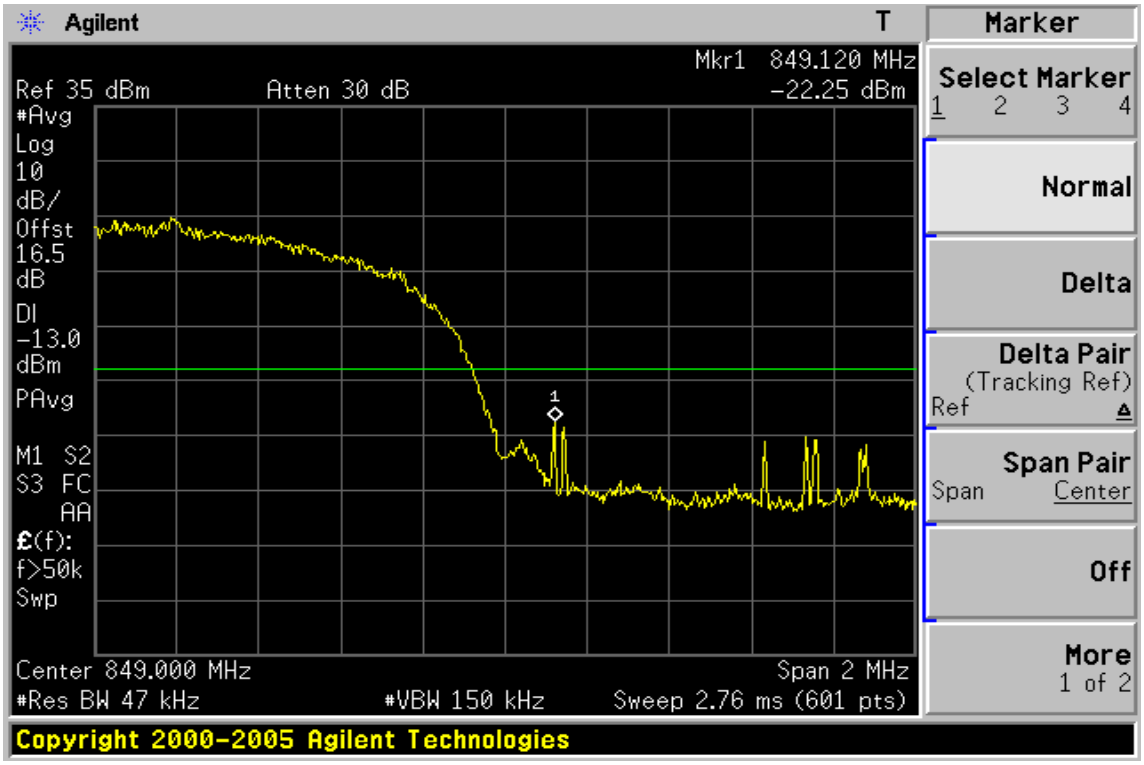

9. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

9.1. Standard Applicable:

According to FCC §2.1053,

FCC §22.917(a),§24.238(a) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

9.2. EUT Setup (Block Diagram of Configuration):

Radiated Emission Test Set-Up, Frequency Below 1000MHz

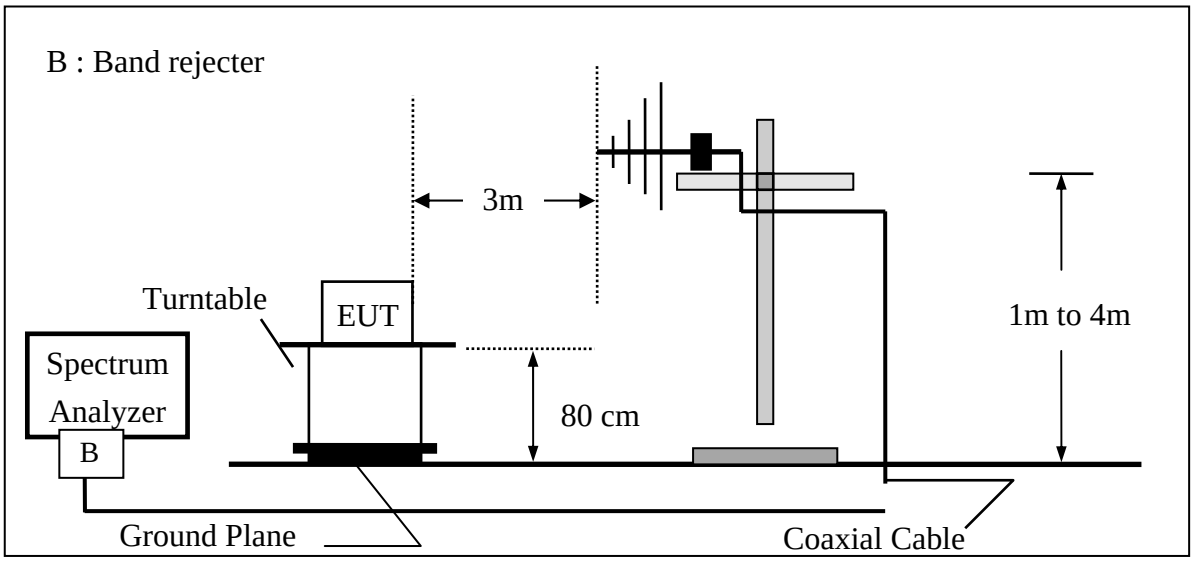

Radiated Emission Test Set-UP Frequency Over 1 GHz

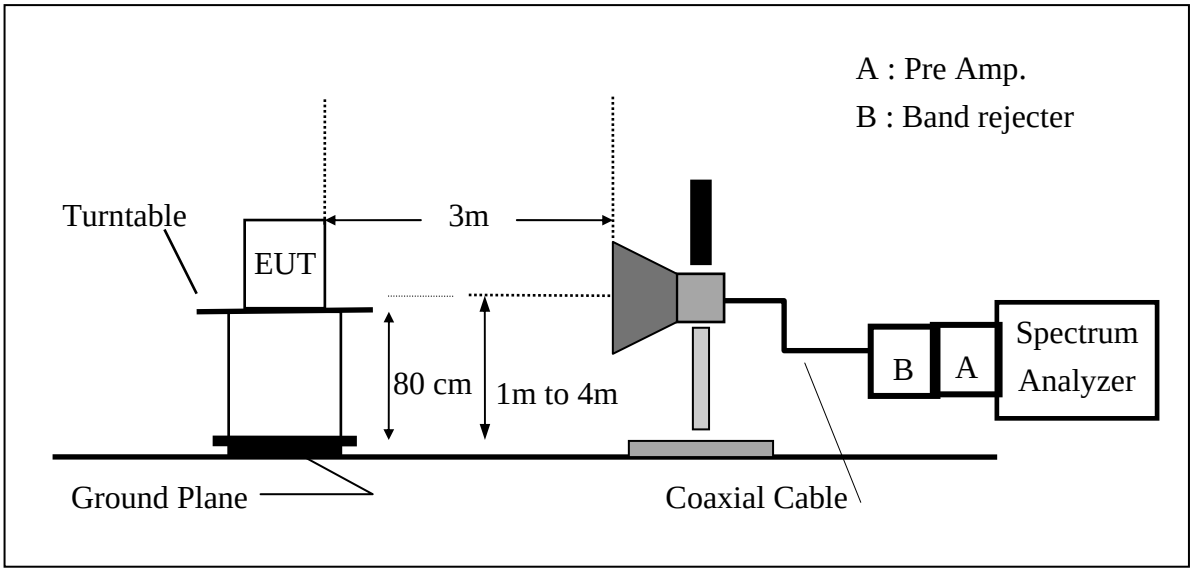

9.3. Measurement Procedure:

The EUT was placed on a non-conductive; The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

ERP= S.G. output (dBm) + Antenna Gain (dBd) – Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain(dBi) – Cable Loss (dB)

9.4. Measurement Equipment Used:

Refer to section 2.4 in this report

9.5. Measurement Result:

Refer to attach tabular data sheets.

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH Low Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 824.20 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	48.05	V	-56.09	-6.43	0.94	-63.46	-13.00	-50.46
146.40	32.62	V	-65.00	-7.80	1.57	-74.37	-13.00	-61.37
322.64	33.48	V	-64.49	-7.79	2.26	-74.54	-13.00	-61.54
485.90	32.59	V	-61.49	-7.71	2.76	-71.97	-13.00	-58.97
697.36	33.67	V	-55.74	-7.86	3.28	-66.88	-13.00	-53.88
959.26	33.89	V	-50.52	-8.00	3.91	-62.42	-13.00	-49.42
1648.40	53.55	V	-51.03	9.29	5.23	-46.97	-13.00	-33.97
2472.60	---	V		10.08	6.53		-13.00	
3296.80	---	V		12.17	7.71		-13.00	
4121.00	---	V		12.61	8.86		-13.00	
4945.20	---	V		12.65	9.74		-13.00	
5769.40	---	V		13.55	10.54		-13.00	
6593.60	---	V		12.05	11.30		-13.00	
7417.80	---	V		11.49	12.10		-13.00	
8242.00	---	V		11.48	12.71		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH Low Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 824.20 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
34.85	43.82	H	-60.58	-5.07	0.92	-66.56	-13.00	-53.56
156.10	33.48	H	-64.76	-7.80	1.60	-74.17	-13.00	-61.17
330.70	32.81	H	-64.57	-7.75	2.29	-74.60	-13.00	-61.60
478.14	32.58	H	-61.06	-7.71	2.74	-71.51	-13.00	-58.51
652.74	35.04	H	-54.57	-7.81	3.17	-65.55	-13.00	-52.55
968.96	33.25	H	-50.85	-8.00	3.94	-62.78	-13.00	-49.78
1648.40	51.89	H	-52.51	9.29	5.23	-48.45	-13.00	-35.45
2472.60	50.54	H	-50.37	10.08	6.53	-46.82	-13.00	-33.82
3296.80	---	H		12.17	7.71		-13.00	
4121.00	---	H		12.61	8.86		-13.00	
4945.20	---	H		12.65	9.74		-13.00	
5769.40	---	H		13.55	10.54		-13.00	
6593.60	---	H		12.05	11.30		-13.00	
7417.80	---	H		11.49	12.10		-13.00	
8242.00	---	H		11.48	12.71		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH Mid Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 836.60 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
30.00	48.20	V	-56.50	-7.34	0.95	-64.79	-13.00	-51.79
156.10	33.05	V	-64.79	-7.80	1.60	-74.20	-13.00	-61.20
357.86	31.59	V	-65.71	-7.64	2.38	-75.73	-13.00	-62.73
497.54	32.22	V	-61.91	-7.72	2.79	-72.42	-13.00	-59.42
701.24	33.87	V	-55.51	-7.86	3.29	-66.67	-13.00	-53.67
975.75	33.28	V	-50.75	-7.99	3.96	-62.70	-13.00	-49.70
1673.20	50.58	V	-53.98	9.36	5.27	-49.88	-13.00	-36.88
2509.80	---	V		10.09	6.58		-13.00	
3346.40	---	V		12.28	7.79		-13.00	
4183.00	---	V		12.62	8.93		-13.00	
5019.60	---	V		12.67	9.81		-13.00	
5856.20	---	V		13.68	10.62		-13.00	
6692.80	---	V		11.95	11.39		-13.00	
7529.40	---	V		11.45	12.20		-13.00	
8366.00	---	V		11.59	12.81		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belongs to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH Mid Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 836.60 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
34.85	45.26	H	-59.14	-5.07	0.92	-65.12	-13.00	-52.12
138.64	35.53	H	-63.43	-7.79	1.54	-72.76	-13.00	-59.76
352.04	32.09	H	-65.08	-7.64	2.37	-75.09	-13.00	-62.09
468.44	33.83	H	-59.90	-7.71	2.71	-70.32	-13.00	-57.32
699.30	33.46	H	-54.20	-7.86	3.29	-65.35	-13.00	-52.35
951.50	33.94	H	-50.26	-8.00	3.88	-62.15	-13.00	-49.15
1673.20	50.19	H	-54.19	9.36	5.27	-50.09	-13.00	-37.09
2509.80	44.79	H	-55.91	10.09	6.58	-52.41	-13.00	-39.41
3346.40	---	H		12.28	7.79		-13.00	
4183.00	---	H		12.62	8.93		-13.00	
5019.60	---	H		12.67	9.81		-13.00	
5856.20	---	H		13.68	10.62		-13.00	
6692.80	---	H		11.95	11.39		-13.00	
7529.40	---	H		11.45	12.20		-13.00	
8366.00	---	H		11.59	12.81		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH High Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 848.80 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	48.10	V	-56.04	-6.43	0.94	-63.41	-13.00	-50.41
190.05	37.97	V	-62.92	-7.83	1.69	-72.43	-13.00	-59.43
328.76	33.03	V	-64.86	-7.76	2.28	-74.90	-13.00	-61.90
461.65	33.23	V	-60.75	-7.70	2.69	-71.15	-13.00	-58.15
701.24	33.55	V	-55.83	-7.86	3.29	-66.99	-13.00	-53.99
934.04	34.13	V	-50.53	-7.98	3.85	-62.37	-13.00	-49.37
1697.60	50.75	V	-53.79	9.44	5.31	-49.66	-13.00	-36.66
2546.40	---	V		10.20	6.63		-13.00	
3395.20	---	V		12.38	7.87		-13.00	
4244.00	---	V		12.63	9.00		-13.00	
5092.80	---	V		12.74	9.88		-13.00	
5941.60	---	V		13.81	10.70		-13.00	
6790.40	---	V		11.86	11.48		-13.00	
7639.20	---	V		11.40	12.27		-13.00	
8488.00	---	V		11.70	12.91		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH High Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 848.80 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	43.50	H	-61.80	-6.43	0.94	-69.17	-13.00	-56.17
154.16	32.36	H	-65.73	-7.80	1.60	-75.14	-13.00	-62.14
321.00	33.06	H	-64.41	-7.80	2.25	-74.46	-13.00	-61.46
493.66	32.72	H	-60.79	-7.72	2.78	-71.29	-13.00	-58.29
691.54	34.24	H	-53.74	-7.85	3.27	-64.86	-13.00	-51.86
959.26	33.37	H	-50.78	-8.00	3.91	-62.69	-13.00	-49.69
1697.60	48.27	H	-56.08	9.44	5.31	-51.95	-13.00	-38.95
2546.40	44.75	H	-55.85	10.20	6.63	-52.29	-13.00	-39.29
3395.20	---	H		12.38	7.87		-13.00	
4244.00	---	H		12.63	9.00		-13.00	
5092.80	---	H		12.74	9.88		-13.00	
5941.60	---	H		13.81	10.70		-13.00	
6790.40	---	H		11.86	11.48		-13.00	
7639.20	---	H		11.40	12.27		-13.00	
8488.00	---	H		11.70	12.91		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH Low Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 1850.20MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
30.00	47.51	V	-57.19	-7.34	0.95	-65.48	-13.00	-52.48
144.46	34.72	V	-63.08	-7.80	1.56	-72.44	-13.00	-59.44
338.46	32.22	V	-65.55	-7.70	2.32	-75.57	-13.00	-62.57
466.50	31.93	V	-62.07	-7.71	2.71	-72.48	-13.00	-59.48
658.56	32.63	V	-56.38	-7.82	3.18	-67.38	-13.00	-54.38
835.10	32.99	V	-53.28	-7.88	3.65	-64.81	-13.00	-51.81
3700.40	46.97	V	-50.96	12.61	8.31	-46.66	-13.00	-33.66
5550.60	---	V		13.23	10.33		-13.00	
7400.80	---	V		11.50	12.08		-13.00	
9251.00	---	V		11.92	13.50		-13.00	
11101.20	---	V		11.66	15.11		-13.00	
12951.40	---	V		13.63	16.60		-13.00	
14801.60	---	V		12.76	17.95		-13.00	
16651.80	---	V		15.92	19.14		-13.00	
18502.00	---	V		18.75	10.40		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH Low Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 1850.20MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
34.85	43.02	H	-61.38	-5.07	0.92	-67.36	-13.00	-54.36
156.10	33.28	H	-64.96	-7.80	1.60	-74.37	-13.00	-61.37
348.16	32.35	H	-64.87	-7.65	2.35	-74.87	-13.00	-61.87
476.20	32.10	H	-61.56	-7.71	2.73	-72.00	-13.00	-59.00
658.56	32.62	H	-56.74	-7.82	3.18	-67.74	-13.00	-54.74
837.04	32.43	H	-53.80	-7.88	3.65	-65.33	-13.00	-52.33
3700.40	46.81	H	-51.23	12.61	8.31	-46.93	-13.00	-33.93
5550.60	---	H		13.23	10.33		-13.00	
7400.80	---	H		11.50	12.08		-13.00	
9251.00	---	H		11.92	13.50		-13.00	
11101.20	---	H		11.66	15.11		-13.00	
12951.40	---	H		13.63	16.60		-13.00	
14801.60	---	H		12.76	17.95		-13.00	
16651.80	---	H		15.92	19.14		-13.00	
18502.00	---	H		18.75	10.40		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH Mid Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 1880MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	48.15	V	-55.99	-6.43	0.94	-63.36	-13.00	-50.36
151.25	32.69	V	-64.71	-7.80	1.59	-74.11	-13.00	-61.11
338.46	32.33	V	-65.44	-7.70	2.32	-75.46	-13.00	-62.46
500.45	31.86	V	-62.27	-7.72	2.80	-72.79	-13.00	-59.79
660.50	32.75	V	-56.28	-7.82	3.19	-67.29	-13.00	-54.29
854.50	32.21	V	-53.78	-7.89	3.69	-65.35	-13.00	-52.35
3760.00	47.46	V	-50.20	12.60	8.39	-45.98	-13.00	-32.98
5640.00	---	V		13.36	10.41		-13.00	
7520.00	---	V		11.45	12.19		-13.00	
9400.00	---	V		11.93	13.61		-13.00	
11280.00	---	V		11.92	15.27		-13.00	
13160.00	---	V		13.33	16.71		-13.00	
15040.00	---	V		13.76	18.15		-13.00	
16920.00	---	V		15.27	19.32		-13.00	
18800.00	---	V		18.68	16.58		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH Mid Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 1880MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
37.76	42.54	H	-60.95	-3.70	0.90	-65.56	-13.00	-52.56
128.94	34.76	H	-65.21	-7.78	1.49	-74.49	-13.00	-61.49
330.70	32.62	H	-64.76	-7.75	2.29	-74.79	-13.00	-61.79
481.05	32.32	H	-61.30	-7.71	2.75	-71.76	-13.00	-58.76
660.50	32.64	H	-56.64	-7.82	3.19	-67.65	-13.00	-54.65
854.50	32.18	H	-53.89	-7.89	3.69	-65.47	-13.00	-52.47
3760.00	48.83	H	-48.94	12.60	8.39	-44.73	-13.00	-31.73
5640.00	---	H		13.36	10.41		-13.00	
7520.00	---	H		11.45	12.19		-13.00	
9400.00	---	H		11.93	13.61		-13.00	
11280.00	---	H		11.92	15.27		-13.00	
13160.00	---	H		13.33	16.71		-13.00	
15040.00	---	H		13.76	18.15		-13.00	
16920.00	---	H		15.27	19.32		-13.00	
18800.00	---	H		18.68	16.58		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH High Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 1909.8 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	50.26	V	-53.88	-6.43	0.94	-61.25	-13.00	-48.25
148.34	32.97	V	-64.47	-7.80	1.58	-73.85	-13.00	-60.85
253.10	35.95	V	-63.84	-7.89	2.00	-73.73	-13.00	-60.73
478.14	32.35	V	-61.70	-7.71	2.74	-72.15	-13.00	-59.15
704.15	32.27	V	-56.98	-7.86	3.30	-68.14	-13.00	-55.14
856.44	32.36	V	-53.57	-7.89	3.69	-65.16	-13.00	-52.16
3819.60	45.68	V	-51.71	12.60	8.47	-47.58	-13.00	-34.58
5729.40	---	V		13.49	10.50		-13.00	
7639.20	---	V		11.40	12.27		-13.00	
9549.00	---	V		11.95	13.74		-13.00	
11458.80	---	V		12.17	15.43		-13.00	
13368.60	---	V		12.97	16.82		-13.00	
15278.40	---	V		15.00	18.29		-13.00	
17188.20	---	V		14.47	19.52		-13.00	
19098.00	---	V		18.66	20.78		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH High Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 1909.8 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
34.85	44.56	H	-59.84	-5.07	0.92	-65.82	-13.00	-52.82
156.10	32.33	H	-65.91	-7.80	1.60	-75.32	-13.00	-62.32
348.16	32.11	H	-65.11	-7.65	2.35	-75.11	-13.00	-62.11
449.04	32.89	H	-61.05	-7.70	2.66	-71.41	-13.00	-58.41
648.86	32.92	H	-56.82	-7.81	3.16	-67.79	-13.00	-54.79
852.56	32.17	H	-53.95	-7.88	3.69	-65.52	-13.00	-52.52
3819.60	50.12	H	-47.39	12.60	8.47	-43.25	-13.00	-30.25
5729.40	---	H		13.49	10.50		-13.00	
7639.20	---	H		11.40	12.27		-13.00	
9549.00	---	H		11.95	13.74		-13.00	
11458.80	---	H		12.17	15.43		-13.00	
13368.60	---	H		12.97	16.82		-13.00	
15278.40	---	H		15.00	18.29		-13.00	
17188.20	---	H		14.47	19.52		-13.00	
19098.00	---	H		18.66	20.78		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA II Mode

Operation Mode : TX CH Low Mode
Fundamental Frequency : 1852.4MHz
Temperature : 25℃
Humidity : 65%

Test Date: Jan. 27, 2011
Test By: Bondi
Pol: Ver

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	46.78	V	-57.36	-6.43	0.94	-64.73	-13.00	-51.73
158.04	33.22	V	-64.79	-7.81	1.61	-74.21	-13.00	-61.21
357.86	31.32	V	-65.98	-7.64	2.38	-76.00	-13.00	-63.00
458.74	31.95	V	-62.02	-7.70	2.68	-72.40	-13.00	-59.40
645.95	32.46	V	-56.51	-7.81	3.15	-67.47	-13.00	-54.47
972.84	32.76	V	-51.33	-8.00	3.95	-63.28	-13.00	-50.28
3704.80	41.31	V	-56.60	12.61	8.31	-52.31	-13.00	-39.31
5557.20	---	V		13.24	10.33		-13.00	
7409.60	---	V		11.49	12.09		-13.00	
9262.00	---	V		11.92	13.51		-13.00	
11114.40	---	V		11.68	15.12		-13.00	
12966.80	---	V		13.62	16.61		-13.00	
14819.20	---	V		12.83	17.96		-13.00	
16671.60	---	V		15.87	19.15		-13.00	
18524.00	---	V		18.74	10.86		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA II Mode

Operation Mode : TX CH Low Mode
Fundamental Frequency : 1852.4MHz
Temperature : 25℃
Humidity : 65%

Test Date: Jan. 27, 2011
Test By: Bondi
Pol: Hor

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
34.85	43.16	H	-61.24	-5.07	0.92	-67.22	-13.00	-54.22
156.10	33.86	H	-64.38	-7.80	1.60	-73.79	-13.00	-60.79
340.40	32.25	H	-65.04	-7.69	2.32	-75.06	-13.00	-62.06
427.70	32.51	H	-62.51	-7.68	2.59	-72.79	-13.00	-59.79
648.86	32.56	H	-57.18	-7.81	3.16	-68.15	-13.00	-55.15
966.05	33.24	H	-50.87	-8.00	3.93	-62.80	-13.00	-49.80
3704.80	41.58	H	-56.44	12.61	8.31	-52.15	-13.00	-39.15
5557.20	---	H		13.24	10.33		-13.00	
7409.60	---	H		11.49	12.09		-13.00	
9262.00	---	H		11.92	13.51		-13.00	
11114.40	---	H		11.68	15.12		-13.00	
12966.80	---	H		13.62	16.61		-13.00	
14819.20	---	H		12.83	17.96		-13.00	
16671.60	---	H		15.87	19.15		-13.00	
18524.00	---	H		18.74	10.86		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA II Mode

Operation Mode : TX CH Mid Mode
Fundamental Frequency : 1880MHz
Temperature : 25℃
Humidity : 65%

Test Date: Jan. 27, 2011
Test By: Bondi
Pol: Ver

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	50.19	V	-53.95	-6.43	0.94	-61.32	-13.00	-48.32
158.04	32.72	V	-65.29	-7.81	1.61	-74.71	-13.00	-61.71
352.04	32.68	V	-64.86	-7.64	2.37	-74.87	-13.00	-61.87
468.44	32.00	V	-62.01	-7.71	2.71	-72.43	-13.00	-59.43
691.54	32.80	V	-56.55	-7.85	3.27	-67.67	-13.00	-54.67
978.66	32.99	V	-50.97	-7.99	3.97	-62.93	-13.00	-49.93
3760.00	40.46	V	-57.20	12.60	8.39	-52.98	-13.00	-39.98
5640.00	---	V		13.36	10.41		-13.00	
7520.00	---	V		11.45	12.19		-13.00	
9400.00	---	V		11.93	13.61		-13.00	
11280.00	---	V		11.92	15.27		-13.00	
13160.00	---	V		13.33	16.71		-13.00	
15040.00	---	V		13.76	18.15		-13.00	
16920.00	---	V		15.27	19.32		-13.00	
18800.00	---	V		18.68	16.58		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA II Mode

Operation Mode	: TX CH Mid Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 1880MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
34.85	42.90	H	-61.50	-5.07	0.92	-67.48	-13.00	-54.48
156.10	32.31	H	-65.93	-7.80	1.60	-75.34	-13.00	-62.34
338.46	32.13	H	-65.18	-7.70	2.32	-75.20	-13.00	-62.20
490.75	32.21	H	-61.32	-7.72	2.77	-71.81	-13.00	-58.81
655.65	32.36	H	-57.12	-7.82	3.17	-68.11	-13.00	-55.11
968.96	32.66	H	-51.44	-8.00	3.94	-63.37	-13.00	-50.37
3760.00	39.84	H	-57.93	12.60	8.39	-53.72	-13.00	-40.72
5640.00	---	H		13.36	10.41		-13.00	
7520.00	---	H		11.45	12.19		-13.00	
9400.00	---	H		11.93	13.61		-13.00	
11280.00	---	H		11.92	15.27		-13.00	
13160.00	---	H		13.33	16.71		-13.00	
15040.00	---	H		13.76	18.15		-13.00	
16920.00	---	H		15.27	19.32		-13.00	
18800.00	---	H		18.68	16.58		-13.00	
34.85	42.90	H	-61.50	-5.07	0.92	-67.48	-13.00	-54.48

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA II Mode

Operation Mode	: TX CH High Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 1907.6 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	48.61	V	-55.53	-6.43	0.94	-62.90	-13.00	-49.90
185.20	39.31	V	-61.14	-7.83	1.67	-70.64	-13.00	-57.64
345.25	32.38	V	-65.31	-7.67	2.34	-75.32	-13.00	-62.32
474.26	32.60	V	-61.43	-7.71	2.73	-71.87	-13.00	-58.87
655.65	32.17	V	-56.81	-7.82	3.17	-67.80	-13.00	-54.80
968.96	32.47	V	-51.71	-8.00	3.94	-63.65	-13.00	-50.65
3815.20	47.20	V	-50.21	12.60	8.46	-46.07	-13.00	-33.07
5722.80	---	V		13.48	10.49		-13.00	
7630.40	---	V		11.41	12.27		-13.00	
9538.00	---	V		11.95	13.73		-13.00	
11445.60	---	V		12.15	15.42		-13.00	
13353.20	---	V		13.00	16.81		-13.00	
15260.80	---	V		14.91	18.28		-13.00	
17168.40	---	V		14.53	19.50		-13.00	
19076.00	---	V		18.65	20.76		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA II Mode

Operation Mode : TX CH High Mode
Fundamental Frequency : 1907.6MHz
Temperature : 25℃
Humidity : 65%

Test Date: Jan. 27, 2011
Test By: Bondi
Pol: Hor

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
34.85	43.54	H	-60.86	-5.07	0.92	-66.84	-13.00	-53.84
156.10	32.35	H	-65.89	-7.80	1.60	-75.30	-13.00	-62.30
321.00	33.76	H	-63.71	-7.80	2.25	-73.76	-13.00	-60.76
485.90	32.07	H	-61.50	-7.71	2.76	-71.98	-13.00	-58.98
699.30	32.70	H	-54.96	-7.86	3.29	-66.11	-13.00	-53.11
883.60	32.96	H	-52.33	-7.93	3.75	-64.01	-13.00	-51.01
3815.20	43.75	H	-53.78	12.60	8.46	-49.64	-13.00	-36.64
5722.80	---	H		13.48	10.49		-13.00	
7630.40	---	H		11.41	12.27		-13.00	
9538.00	---	H		11.95	13.73		-13.00	
11445.60	---	H		12.15	15.42		-13.00	
13353.20	---	H		13.00	16.81		-13.00	
15260.80	---	H		14.91	18.28		-13.00	
17168.40	---	H		14.53	19.50		-13.00	
19076.00	---	H		18.65	20.76		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA V Mode

Operation Mode	: TX CH Low Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 826.40 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	43.62	V	-60.52	-8.57	0.94	-70.03	-13.00	-57.03
136.70	34.88	V	-63.64	-9.94	1.53	-75.11	-13.00	-62.11
335.55	33.22	V	-64.59	-9.86	2.31	-76.76	-13.00	-63.76
474.26	33.10	V	-60.93	-9.85	2.73	-73.51	-13.00	-60.51
707.06	33.46	V	-55.65	-10.00	3.32	-68.97	-13.00	-55.97
968.96	33.47	V	-50.71	-10.14	3.94	-64.79	-13.00	-51.79
1652.80	44.42	V	-60.16	9.30	5.23	-56.09	-13.00	-43.09
2479.20	---	V		10.07	6.54		-13.00	
3305.60	---	V		12.19	7.73		-13.00	
4132.00	---	V		12.62	8.87		-13.00	
4958.40	---	V		12.65	9.75		-13.00	
5784.80	---	V		13.58	10.55		-13.00	
6611.20	---	V		12.03	11.31		-13.00	
7437.60	---	V		11.48	12.12		-13.00	
8264.00	---	V		11.50	12.73		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA V Mode

Operation Mode	: TX CH Low Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 826.40MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
39.70	37.94	H	-64.95	-4.93	0.89	-70.78	-13.00	-57.78
136.70	32.35	H	-66.81	-9.94	1.53	-78.28	-13.00	-65.28
359.80	31.93	H	-65.12	-9.78	2.39	-77.29	-13.00	-64.29
458.74	33.05	H	-60.76	-9.84	2.68	-73.29	-13.00	-60.29
704.15	33.31	H	-55.10	-10.00	3.30	-68.40	-13.00	-55.40
968.96	33.87	H	-50.23	-10.14	3.94	-64.30	-13.00	-51.30
1652.80	39.74	H	-64.66	9.30	5.23	-60.59	-13.00	-47.59
2479.20	---	H		10.07	6.54		-13.00	
3305.60	---	H		12.19	7.73		-13.00	
4132.00	---	H		12.62	8.87		-13.00	
4958.40	---	H		12.65	9.75		-13.00	
5784.80	---	H		13.58	10.55		-13.00	
6611.20	---	H		12.03	11.31		-13.00	
7437.60	---	H		11.48	12.12		-13.00	
8264.00	---	H		11.50	12.73		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA V Mode

Operation Mode : TX CH Mid Mode
Fundamental Frequency : 836.60MHz
Temperature : 25℃
Humidity : 65%

Test Date: Jan. 27, 2011
Test By: Bondi
Pol: Ver

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	46.77	V	-57.37	-8.57	0.94	-66.88	-13.00	-53.88
119.24	43.84	V	-56.30	-9.94	1.45	-67.69	-13.00	-54.69
359.80	31.77	V	-65.44	-9.78	2.39	-77.62	-13.00	-64.62
474.26	33.04	V	-60.99	-9.85	2.73	-73.57	-13.00	-60.57
699.30	33.35	V	-56.08	-10.00	3.29	-69.37	-13.00	-56.37
970.90	34.28	V	-49.86	-10.14	3.94	-63.94	-13.00	-50.94
1672.00	42.59	V	-61.97	9.36	5.27	-57.88	-13.00	-44.88
2508.00	---	V		10.08	6.58		-13.00	
3344.00	---	V		12.27	7.79		-13.00	
4180.00	---	V		12.62	8.93		-13.00	
5016.00	---	V		12.67	9.81		-13.00	
5852.00	---	V		13.68	10.62		-13.00	
6033.00	---	V		13.78	10.79		-13.00	
6688.00	---	V		11.96	11.39		-13.00	
7524.00	---	V		11.45	12.20		-13.00	
8360.00	---	V		11.58	12.81		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA V Mode

Operation Mode : TX CH Mid Mode
Fundamental Frequency : 836.60MHz
Temperature : 25℃
Humidity : 65%

Test Date: Jan. 27, 2011
Test By: Bondi
Pol: Hor

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
39.70	38.57	H	-64.32	-4.93	0.89	-70.15	-13.00	-57.15
148.34	32.05	H	-65.89	-9.94	1.58	-77.42	-13.00	-64.42
359.80	31.94	H	-65.11	-9.78	2.39	-77.28	-13.00	-64.28
471.35	33.04	H	-60.66	-9.85	2.72	-73.23	-13.00	-60.23
701.24	33.56	H	-54.30	-10.00	3.29	-67.60	-13.00	-54.60
970.90	33.25	H	-50.83	-10.14	3.94	-64.91	-13.00	-51.91
1672.00	41.52	H	-62.86	9.36	5.27	-58.76	-13.00	-45.76
2508.00	---	H		10.08	6.58		-13.00	
3344.00	---	H		12.27	7.79		-13.00	
4180.00	---	H		12.62	8.93		-13.00	
5016.00	---	H		12.67	9.81		-13.00	
5852.00	---	H		13.68	10.62		-13.00	
6688.00	---	H		11.96	11.39		-13.00	
7524.00	---	H		11.45	12.20		-13.00	
8360.00	---	H		11.58	12.81		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA V Mode

Operation Mode	: TX CH High Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 846.60 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	44.12	V	-60.02	-8.57	0.94	-69.53	-13.00	-56.53
148.34	32.78	V	-64.66	-9.94	1.58	-76.19	-13.00	-63.19
321.00	33.37	V	-64.62	-9.94	2.25	-76.81	-13.00	-63.81
485.90	32.73	V	-61.35	-9.85	2.76	-73.97	-13.00	-60.97
694.45	33.80	V	-55.58	-9.99	3.28	-68.85	-13.00	-55.85
968.96	33.28	V	-50.90	-10.14	3.94	-64.98	-13.00	-51.98
1693.20	42.76	V	-61.78	9.42	5.30	-57.66	-13.00	-44.66
2539.80	---	V		10.18	6.62		-13.00	
3386.40	---	V		12.36	7.85		-13.00	
4233.00	---	V		12.63	8.99		-13.00	
5079.60	---	V		12.73	9.87		-13.00	
5926.20	---	V		13.79	10.69		-13.00	
6772.80	---	V		11.87	11.47		-13.00	
7619.40	---	V		11.41	12.26		-13.00	
8466.00	---	V		11.68	12.89		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

Radiated Spurious Emission Measurement Result: HSUPA V Mode

Operation Mode	: TX CH High Mode	Test Date:	Jan. 27, 2011
Fundamental Frequency	: 846.60 MHz	Test By:	Bondi
Temperature	: 25℃	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
39.70	38.10	H	-64.79	-4.93	0.89	-70.62	-13.00	-57.62
148.34	31.86	H	-66.08	-9.94	1.58	-77.61	-13.00	-64.61
345.25	32.23	H	-65.01	-9.81	2.34	-77.16	-13.00	-64.16
461.65	32.84	H	-60.95	-9.84	2.69	-73.48	-13.00	-60.48
689.60	33.76	H	-54.30	-9.99	3.26	-67.56	-13.00	-54.56
963.14	33.74	H	-50.39	-10.14	3.92	-64.45	-13.00	-51.45
1693.20	41.85	H	-62.50	9.42	5.30	-58.38	-13.00	-45.38
2539.80	---	H		10.18	6.62		-13.00	
3386.40	---	H		12.36	7.85		-13.00	
4233.00	---	H		12.63	8.99		-13.00	
5079.60	---	H		12.73	9.87		-13.00	
5926.20	---	H		13.79	10.69		-13.00	
6772.80	---	H		11.87	11.47		-13.00	
7619.40	---	H		11.41	12.26		-13.00	
8466.00	---	H		11.68	12.89		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) – Cable loss (dB)

10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

10.1. Standard Applicable:

According to FCC §2.1055(a) (1)

Frequency Tolerance: +/-2.5ppm for 850MHz band

+/-2.5ppm for 1900MHz band

10.2. Test Set-up:

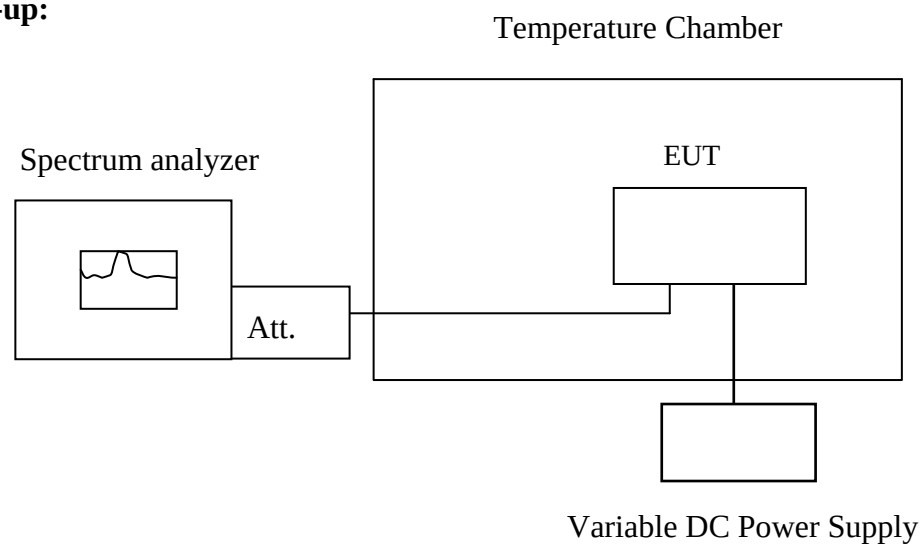

Note : Measurement setup for testing on Antenna connector

10.3. Measurement Procedure:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25^{o}C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to –30^{o}C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10^{o}C increased per stage until the highest temperature of +50^{o}C reached.

10.4. Measurement Equipment Used:

Refer to section 2.4 in this report

10.5. Measurement Result:

Reference Frequency: GPRS 850 Mid Channel 836.6 MHz @ 25℃				
Limit: +/- 2.5 ppm = 2091 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (℃)	(MHz)		
3.7	-30	836.599983	6.00	2091
3.7	-20	836.599984	5.00	2091
3.7	-10	836.599988	3.00	2091
3.7	0	836.599986	1.00	2091
3.7	10	836.599991	-4.00	2091
3.7	20	836.599997	0.00	2091
3.7	30	836.599993	2.00	2091
3.7	40	836.599990	3.00	2091
3.7	50	836.599989	5.00	2091

Reference Frequency: GPRS 1900Mid Channel 1880 MHz @ 20℃				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (℃)	(MHz)		
3.7	-30	1879.999993	12.00	4700
3.7	-20	1879.999987	18.00	4700
3.7	-10	1879.999991	14.00	4700
3.7	0	1879.999995	10.00	4700
3.7	10	1880.000001	4.00	4700
3.7	20	1880.000005	0.00	4700
3.7	30	1880.000003	2.00	4700
3.7	40	1879.999999	6.00	4700
3.7	50	1879.999997	8.00	4700

Note: The battery is rated 3.7V dc.

Reference Frequency: WCDMA II Mid Channel 1880 (ARFCN9400) MHz @ 20℃				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (℃)	(MHz)		
3.7	-30	1880.000003	5.00	4700
3.7	-20	1880.000008	-12.00	4700
3.7	-10	1880.000005	1.00	4700
3.7	0	1879.999999	15.00	4700
3.7	10	1879.999998	4.00	4700
3.7	20	1879.999992	0.00	4700
3.7	30	1879.999988	2.00	4700
3.7	40	1879.999985	6.00	4700
3.7	50	1879.999981	0.00	4700

Reference Frequency: WCDMA V Mid Channel 836 (ARFCN4183) MHz @ 20℃				
Limit: +/- 2.5 ppm = 2090 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (℃)	(MHz)		
3.7	-30	836.599982	1.00	2091
3.7	-20	836.599987	-2.00	2091
3.7	-10	836.599991	17.00	2091
3.7	0	836.599997	8.00	2091
3.7	10	836.600001	1.00	2091
3.7	20	836.600002	0.00	2091
3.7	30	836.600004	3.00	2091
3.7	40	836.600001	5.00	2091
3.7	50	836.000003	10.00	2091

Note: The battery is rated 3.7V dc.

11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

11.1. Standard Applicable:

According to FCC §2.1055(a) (1)

Frequency Tolerance: +/-2.5ppm for 850MHz band

+/-2.5ppm for 1900MHz band

11.2. Test Set-up:

Refer to section 10.2 in this report

11.3. Measurement Procedure:

Set chamber temperature to 25℃. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

11.4. Measurement Equipment Used:

Refer to section 2.4 in this report

11.5. Measurement Result:

Reference Frequency: GPRS 850 Mid Channel 836.6 MHz @ 25℃				
Limit: +/- 2.5 ppm = 2091 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (℃)	(MHz)		
4.2	25.00	836.599992	5.00	2091.00
3.7	25.00	836.599997	0.00	2091.00
3.4	25.00	836.599990	7.00	2091.00
2.9 (End Point)	25.00	836.599754	243.00	2091.00

Reference Frequency: GPRS 1900 Mid Channel 1880 MHz @ 25℃				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (℃)	(MHz)		
4.2	25	1880.000009	-4.00	4700
3.7	25	1880.000005	0.00	4700
3.4	25	1880.000006	-1.00	4700
2.9 (Endpoint)	25	1879.999697	308.00	4700

Note: The battery is rated 3.7V dc.

Reference Frequency: WCDMA II Mid Channel 1880 (ARFCN9400) MHz				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (℃)	(MHz)		
4.2	25.00	836.600001	1.00	4700
3.7	25.00	836.600002	0.00	4700
3.4	25.00	836.600008	-6.00	4700
2.6 (Endpoint)	25.00	836.599988	14.00	4700

Reference Frequency: WCDMA V Mid Channel 836 (ARFCN4183) MHz				
Limit: +/- 2.5 ppm = 2090 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (℃)	(MHz)		
4.2	25.00	1879.999995	-3.00	2090
3.7	25.00	1879.999992	0.00	2090
3.4	25.00	1879.999994	-2.00	2090
2.6 (Endpoint)	25.00	1879.999982	10.00	2090

Note: The battery is rated 3.7V dc.

~ End of Report ~