

# FCC SAR Test Report

## FCC ID: QISALE-L04

**Project No.** : 1503C210  
**Equipment** : Smart Phone  
**Model Name** : HUAWEI ALE-L04, ALE-L04  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C


**Date of Receipt** : Mar. 27, 2015  
**Date of Test** : Mar. 28, 2015~ Apr. 20, 2015  
Jul. 31, 2015~ Aug. 01, 2015  
**Issued Date** : Aug. 03, 2015  
**Tested by** : BTL Inc.

**Testing Engineer** :



( Super Jiang)

**Technical Manager** :



(Leo Hung)

**Authorized Signatory** :



(Steven Lu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, China.  
TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**), or National Institute of Standards and Technology (**NIST**) .

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . GENERAL SUMMARY</b>	<b>6</b>
<b>2 . RF EMISSIONS MEASUREMENT</b>	<b>7</b>
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
3.1 STATEMENT OF COMPLIANCE	8
3.2 GENERAL DESCRIPTION OF EUT	9
3.3 HOTSPOT POWER REDUCTION SPECIFICATION FOR SAR	12
3.4 LABORATORY ENVIRONMENT	13
3.5 MAIN TEST INSTRUMENTS	13
<b>4 .SAR MEASUREMENTS SYSTEM CONFIGURATION</b>	<b>15</b>
4.1 SAR MEASUREMENT SET-UP	15
4.2 DASY5E-FIELDPROBESYSTEM	16
<b>5 . SYSTEM VERIFICATION PROCEDURE</b>	<b>24</b>
5.1 TISSUE VERIFICATION	24
5.2 SYSTEM CHECK	27
5.3 SYSTEM CHECK PROCEDURE	28
<b>6 .SAR MEASUREMENT VARIABILITY AND UNCERTAINTY</b>	<b>29</b>
6.1 SAR MEASUREMENT VARIABILITY	29
6.2 SAR MEASUREMENT UNCERTAINTY	29
<b>7 .SAR TEST CONFIGURATION</b>	<b>30</b>
7.1 GSM TEST CONFIGURATION	30
7.2 UMTS TEST CONFIGURATION	31
7.3 LTE TEST CONFIGURATION	37
7.4 WIFI 2.4G TEST CONFIGURATION	39
<b>8 .TEST RESULT</b>	<b>40</b>
8.1 CONDUCTED POWER RESULTS	40
8.2 SAR TEST RESULTS	66
8.3 MULTIPLE TRANSMITTER EVALUATION	95
<b>APPENDIX</b>	<b>110</b>
<b>1. TEST LAYOUT</b>	<b>110</b>

## Table of Contents

## Page

<b>2. SYSTEM CHECK PLOTS</b>	<b>113</b>
<b>3.SAR MEASUREMENT PLOTS</b>	<b>113</b>
<b>4. CALIBRATION CERTIFICATE</b>	<b>113</b>
<b>5. EUT TESTING POSITION AND ANTENNA LOCATION</b>	<b>114</b>

### REPORT ISSUED HISTORY

Issued No.	Version	Description	Issued Date
BTL-FCC-SAR-1503C210	Rev.00	Original Issue.	Apr. 21, 2015
BTL-FCC-SAR-1503C210	Rev.01	Compared with previous report, the different points are listed as below. <ol style="list-style-type: none"><li>1. The Body-worn and Hotspot of GSM850 have been re-evaluated and recorded in the test report.</li><li>2. The Hotspot of GSM1900 has been re-evaluated and recorded in the test report.</li><li>3. The Simultaneous Transmission SAR has been updated.</li></ol>	Aug. 03, 2015

## 1. GENERAL SUMMARY

Equipment	Smart Phone
Model Name	HUAWEI ALE-L04, ALE-L04
Brand Name	HUAWEI
Manufacturer	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Standard(s)	<p><b>ANSI Std C95.1-1992</b> Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz. (IEEE Std C95.1-1991)</p> <p><b>IEEE Std 1528-2003</b> Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p> <p><b>IEEE Std 1528a-2005</b> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)</p> <p><b>KDB941225 D01</b> 3G SAR Procedures v03  <b>KDB941225 D05</b> SAR for LTE Devices v02r03  <b>KDB941225 D06</b> Hotspot Mode V02  <b>KDB447498 D01</b> General RF Exposure Guidance v05r02  <b>KDB648474 D04</b> SAR Handsets Multi Xmitter and Ant v01r02  <b>KDB248227 D01</b> 802. 11 Wi-Fi SAR v02r01  <b>KDB865664 D01</b> SAR measurement 100 MHz to 6 GHz v01r03  <b>KDB865664 D02</b> SAR Reporting v01r01  <b>KDB690783 D01</b> SAR Listings on Grants v01r03</p>

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCC-SAR-1503C210) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. RF EMISSIONS MEASUREMENT

### 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **SAR room** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town,Dong Guan, China.523792

### 2.2 MEASUREMENT UNCERTAINTY

Uncertainty Component	Uncertainty Value	Probability Distribution	Divisor	C <sub>i</sub> (1g)	Standard Uncertainty ±1%	V <sub>i</sub> or V <sub>eff</sub>
<b>Measurement System</b>						
Probe Calibration (k=1)	5.9	Normal	1	1	5.9	∞
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	1.9	∞
Hemispherical Iso ropy	9.6	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	3.9	∞
Boundary Effect	1.0	Rectangular	$\sqrt{3}$	1	0.6	∞
Linearity	4.7	Rectangular	$\sqrt{3}$	1	2.7	∞
System Detection Limit	1.0	Rectangular	$\sqrt{3}$	1	0.6	∞
Readout Electronics	0.3	Normal	1	1	0.3	∞
Response Time	0.8	Rectangular	$\sqrt{3}$	1	0.5	∞
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	1.5	∞
RF Ambient Conditions-Noise	3.0	Rectangular	$\sqrt{3}$	1	1.7	∞
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	Rectangular	$\sqrt{3}$	1	0.2	∞
Probe Positioning with respect to Phantom Shell	2.9	Rectangular	$\sqrt{3}$	1	1.7	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	1.0	Rectangular	$\sqrt{3}$	1	0.6	∞
<b>Test Sample Related</b>						
Test sample Positioning	2.9	Normal	1	1	2.9	145
Device Holder Uncertainty	3.6	Normal	1	1	3.6	5
Output Power Variation - SAR drift measurement	5.0	Rectangular	$\sqrt{3}$	1	2.9	∞
<b>Phantom and Setup</b>						
Phantom Uncertainty ( shape and thickness tolerances)	4.0	Rectangular	$\sqrt{3}$	1	2.3	∞
Liquid Conductivity - deviation from target value	5.0	Rectangular	$\sqrt{3}$	0.64	1.8	∞
Liquid Conductivity - measurement uncertainty	2.5	Normal	1	0.64	1.6	∞
Liquid Permittivity - deviation from target values	5.0	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Permittivity - measurement uncertainty	2.5	Normal	1	0.6	1.5	∞
<b>Combined standard uncertainty</b>		RSS	-	-	10.9	387
<b>Expanded uncertainty</b>		k=2	-	-	21.9	-

### 3. GENERAL INFORMATION

#### 3.1 STATEMENT OF COMPLIANCE

The maximum results of Specific Absorption Rate (SAR) found during testing for HUAWEI ALE-L04, ALE-L04 are as below Table.

Band	Max Reported SAR(W/kg)		
	1-g Head	1-g Body-worn (15mm) *	1-g Hotspot (10mm)
GSM850	0.70	0.75	1.49
GSM1900	0.48	0.29	1.28
UMTS Band 2	1.18	0.57	1.09
UMTS Band 4	0.56	0.75	0.55
UMTS Band 5	0.44	0.32	0.43
LTE Band 2	0.91	0.45	0.72
LTE Band 4	0.37	1.02	1.12
LTE Band 5	0.23	0.39	0.48
LTE Band 12	0.16	0.17	0.24
LTE Band 17	0.13	0.17	0.23
WiFi 2.4G	0.78	0.07	0.24
<b>The highest simultaneous SAR value is 1.49 W/kg per KDB690783 D01</b>			

Note:

1)\* For body-worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate (SAR) for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003 & IEEE Std 1528a-2005.

### 3.2 GENERAL DESCRIPTION OF EUT

Tested Mode(s)	GSM850/1900, UMTS Band 2/4/5 LTE Band 2/4/5/12/17, WiFi (tested),BT		
Modulation Technology	GSM(GMSK/8PSK),UMTS(QPSK),LTE(QPSK/16QAM), WiFi(DSSS/OFDM)		
Operation Frequency Range(s)	Band	TX (MHz)	RX (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band 2	1850-1910	1930-1990
	UMTS Band 4	1710-1755	2110-2155
	UMTS Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	Bluetooth	2400 ~2483.5	
	WIFI	2400 ~2483.5	
	GPRS / EDGE Multislot Class(10)	Max Number of Timeslots in Uplink:	2
Max Number of Timeslots in Downlink:		4	
Max Total Timeslot:		5	
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band 2)		
	3, tested with power control "all 1"(UMTS Band 4)		
	3, tested with power control "all 1"(UMTS Band 5)		
	3, tested with power control "all Max"(LTE Band 2)		
	3, tested with power control "all Max"(LTE Band 4)		
	3, tested with power control "all Max"(LTE Band 5)		
	3, tested with power control "all Max"(LTE Band 12)		
	3, tested with power control "all Max"(LTE Band 17)		

Test Channels(low-mid-high):	128-190-251 (GSM850)
	512-661-810 (GSM1900)
	9262-9400-9538 (UMTS Band 2)
	1312-1413-1513 (UMTS Band 4)
	4132-4182-4233 (UMTS Band 5)
	18607-18900-19193(LTE Band 2BW=1.4MHz)
	18615-18900-19185(LTE Band 2 BW=3MHz)
	18625-18900-19175(LTE Band 2 BW=5MHz)
	18650-18900-19150(LTE Band 2BW=10MHz)
	18675-18900-19125(LTE Band 2BW=15MHz)
	18700-18900-19100(LTE Band 2 BW=20MHz)
	19957-20175-20393(LTE Band 4BW=1.4MHz)
	19965-20175-20385(LTE Band 4 BW=3MHz)
	19975-20175-20375(LTE Band 4 BW=5MHz)
	20000-20175-20350(LTE Band 4 BW=10MHz)
	20025-20175-20325(LTE Band 4 BW=15MHz)
	20050-20175-20300(LTE Band 4BW=20MHz)
	20407-20525-20643(LTE Band 5 BW=1.4MHz)
	20415-20525-20635(LTE Band 5 BW=3MHz)
	20425-20525-20625(LTE Band 5 BW=5MHz)
	20450-20525-20600(LTE Band 5 BW=10MHz)
	23017-23095-23173(LTE Band 12 BW=1.4MHz)
	23025-23095-23165(LTE Band 12 BW=3MHz)
	230035-23095-23155(LTE Band 12 BW=5MHz)
	23060-23095-23130(LTE Band 12 BW=10MHz)
	23755-23790-23825(LTE Band 17 BW=5MHz)
23780-23790-23800(LTE Band 17 BW=10MHz)	
1-6-11 (WiFi)	
Antenna Gain	GSM850/UMTS Band5/LTE Band 5: -1.1dBi
	GSM1900/UMTS Band2/LTE Band2: -0.2dBi
	UMTS Band4/LTE Band4: -1.3
	LTE Band 12: -2.8
	LTE Band 17: -2.7
	BT/WiFi: -2

Other Information			
Battery	Model	HB3742A0EZC+	
	Capacitance	2200mAh	
	Rated Voltage	4.35V	
	Manufacturer	SCUD (FUJIAN) Electronics Co., Ltd. Sunwoda Electronic Co., LTD.	
Earphone	Brand	QUANCHENG	Lianchuang Hongsheng
	Model	1311-3291-3.5mm-1 78	MEMD1632B580A00
	Manufacturer	QUANCHENG ELECTRONIC CO., LTD	Jiangxi Lianchuang Hongsheng Electronic Co., LTD
Hardware	HL6ALICEM		
Software	ALE-L04 V100R001C00B011		

### 3.3 HOTSPOT POWER REDUCTION SPECIFICATION FOR SAR

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation. A fixed level power reduction is applied when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.

Item	Description
Supporting power reduction or not	Yes
Frequency Band(s) using power reduction	UMTS Band 2/4, LTE Band 2/4
Power reduction feature	A fixed power reduction is applied when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.
Triggering conditions	Only hotspot mode (wireless routing) and nothing else is used to trigger this power reduction.
Full power and reduced power specifications	See Section 8.1
All simultaneous voice and data transmissions combinations and considerations	See Section 8.3

### 3.4 LABORATORY ENVIRONMENT

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

### 3.5 MAIN TEST INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Data Acquisition Electronics	Speag	DAE4	1390	Sep. 15, 2015
2	E-field Probe	Speag	EX3DV4	3932	Jan. 30, 2016
3	Electro Optical Converter	Speag	ECO90	1151	N/A
4	SAM Twin Phantom	Speag	SAM	1784	N/A
5	Power Amplifier	Mini-circuits	ZHL-42W	N/A	N/A
6	Power Amplifier	Mini-circuits	ZVE-8G	N/A	N/A
7	ENA Network Analyzer	Agilent	E5071C	MY46102965	Mar. 29, 2016
8	Dielectric Probe Kit	Agilent	85070E	2593	N/A
9	P-series power meter	Agilent	N1911A	MY45100473	Mar. 29, 2016
10	wideband power sensor	Agilent	N1921A	MY51100041	Mar. 29, 2016
11	Power Meter	Anritsu	ML2487A	6K00004714	Mar. 16, 2016
12	Power Meter Sensor	Anritsu	MA2491A	34138	Mar. 16, 2016
13	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Nov. 02, 2015
14	System Validation Dipole	Speag	D750V3	1095	Sep. 22, 2015
15	System Validation Dipole	Speag	D835V2	4d160	Sep. 23, 2015
16	System Validation Dipole	Speag	D900V2	1d158	Sep. 23, 2015
17	System Validation Dipole	Speag	D1750V2	1101	Sep. 19, 2015
18	System Validation Dipole	Speag	D1900V2	5d179	Sep. 18, 2015
20	System Validation Dipole	Speag	D2450V2	919	Sep. 17, 2015
21	Low pass filter	Mini-Circuits	SLP-2950+	M108294	Mar. 29, 2016
22	Attenuator	Mini-Circuits	VAT-10+	31317-1	Mar. 29, 2016
23	Attenuator	Mini-Circuits	VAT-10+	31317-2	Mar. 29, 2016
24	Attenuator	MEB	300-affn-03	314	Mar. 29, 2016

25	Dual directional coupler	Agilent	777D	50208	Mar. 29, 2016
26	8960 Series 10 Wireless Com Test set	Agilent	E5515E	MY53211053	Jun. 13, 2015
27	Wideband radio communication tester	R&S	CMW500	12010002K50-122125-PJ	Mar. 29, 2016
28	Spectrum Analyzer	R&S	FSL 6	100423	Nov. 02, 2015
29	Directional Coupler	Telestone	TS-PCCOM-05	0107090019	Mar. 04, 2016
30	Coupler	Mini-Circuits	ZADC-10-63-S+	SF663180133 4	Mar. 29, 2016

Remark: " N/A" denotes no model name, serial No. or calibration specified.  
 All calibration period of equipment list is one year.


## 4.SAR MEASUREMENTS SYSTEM CONFIGURATION

### 4.1 SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

#### 4.1.1 Test Setup Layout

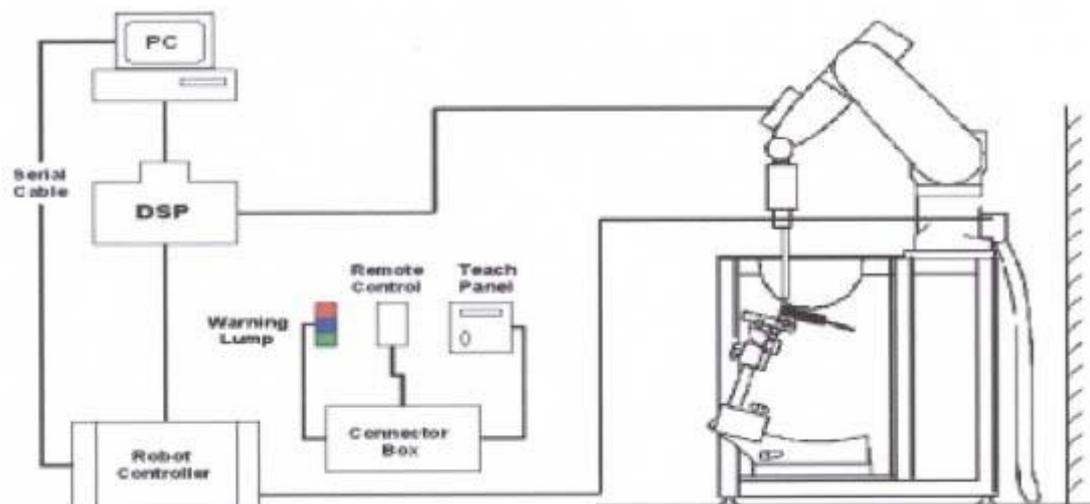

## 4.2 DASY5E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### 4.2.1 EX3DV4 PROBE SPECIFICATION

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm



EX3DV4 E-field Probe

#### 4.2.2E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

Or 
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  $\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density ( $\text{kg}/\text{m}^3$ ).

## 4.2.3 OTHER TEST EQUIPMENT

### 4.2.3.1. Device Holder for Transmitters

**Construction:** Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is light weight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

**Material:** POM, Acrylic glass, Foam

### 4.2.3.2 Phantom

The SAM twin phantom is a berglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6 mm). The phantom has three measurement areas:

- \_ Left hand
- \_ Right hand
- \_ Flat phantom

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during o-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible.



**SAM twin Phantom**

#### 4.2.4 SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max.  $\pm 5\%$ .

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)

- Area Scan

The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement.

Standard grid spacing for head measurements is 15 mm in x- and y- dimension ( $\leq 2\text{GHz}$ ), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

- Zoom Scan

A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution:  $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$ , 2-4GHz -  $\leq 5\text{mm}$  and 4-6 GHz -  $\leq 4\text{mm}$ ;  $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{mm}$ , 3-4 GHz -  $\leq 4\text{mm}$  and 4-6GHz -  $\leq 2\text{mm}$  where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x- and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximum Area Scan resolution ( $\Delta x_{area}$ , $\Delta y_{area}$ )	Maximum Zoom Scan spatial resolution ( $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$ )	Maximum Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥22mm

#### 4.2.5 SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution) or 8 x 8 x 7 points (with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

#### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

#### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

#### Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

## 4.2.6 DATA STORAGE AND EVALUATION

### 4.2.5.1 Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### 4.4.2 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, a <sub>10</sub> , a <sub>11</sub> , a <sub>12</sub>
	Conversion factor	ConvF <sub>i</sub>
	Diode compression point	Dcp <sub>i</sub>
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASYS components. In the direct measuring mode of the multi meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	V <sub>i</sub> = compensated signal of channel i	( i = x, y, z )
	U <sub>i</sub> = input signal of channel i	( i = x, y, z )
	cf = crest factor of exciting field	(DASY parameter)
	dcp <sub>i</sub> = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = ( V_i / \text{Norm}_i \cdot \text{ConvF} )^{1/2}$$

$$\text{H-field probes: } H_i = ( V_i )^{1/2} \cdot ( a_{i0} + a_{i1} f + a_{i2} f^2 ) / f$$

With  $V_i$  = compensated signal of channel i ( i = x, y, z )

$\text{Norm}_i$  = sensor sensitivity of channel i ( i = x, y, z )  
[mV/(V/m)<sup>2</sup>] for E-field Probes

$\text{ConvF}$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With  $\text{SAR}$  = local specific absorption rate in mW/g

$E_{\text{tot}}$  = total field strength in V/m  
= conductivity in [mho/m] or [Siemens/m]  
= equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With  $P_{\text{pwe}}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{\text{tot}}$  = total field strength in V/m

$H_{\text{tot}}$  = total magnetic field strength in A/m

## 5. SYSTEM VERIFICATION PROCEDURE

### 5.1 TISSUE VERIFICATION

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)					
Frequency Band (MHz)	750	835	1750	1900	2450
Water	39.2	41.45	52.64	55.242	62.7
Salt(NaCl)	2.7	1.45	0.36	0.306	0.5
Sugar	57.0	56.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0
TritonX-100	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.8
Ingredients (% of weight)					
Frequency Band (MHz)	750	835	1750	1900	2450
Water	50.3	52.4	69.91	69.91	73.2
Salt(NaCl)	1.60	1.40	0.13	0.13	0.04
Sugar	47.0	45.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0
TritonX-100	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity  
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy)ethanol]  
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp. (°C)	Test Date
		$\epsilon_r$ (+/-5%)	$\sigma$ (S/m) (+/-5%)	$\epsilon_r$	$\sigma$ (S/m)		
Body	750	55.55 (52.77~58.34)	0.97 (0.92~1.02)	54.68	0.95	21.1	2015/4/13
				54.695	0.962	21.3	2015/4/15
	835	55.2 (52.44~57.96)	0.97 (0.92~1.02)	54.35	0.94	21.1	2015/4/13
				54.372	0.954	21.3	2015/4/15
				56.689	0.993	22.1	2015/8/1
	1750	53.44 (50.64~56.11)	1.49 (1.42~1.56)	52.89	1.46	21.0	2015/4/12
				52.912	1.465	22.1	2015/4/20
	1900	53.3 (50.64~55.97)	1.52 (1.44~1.60)	52.82	1.49	21.2	2015/4/11
				52.834	1.512	21.5	2015/4/14
				51.02	1.534	22.2	2015/7/31
	2450	52.7 (50.07~55.35)	1.95 (1.85~2.05)	51.98	1.93	21.5	2015/4/14
	Head	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	42.523	0.87	21.3
835		41.5 (39.43~43.58)	0.9 (0.86~0.95)	42.332	0.92	21.1	2015/3/29
				42.374	0.89	21.2	2015/4/11
1750		40.08 (38.08~42.08)	1.37 (1.30~1.44)	41.562	1.42	20.9	2015/4/7
				41.493	1.41	20.8	2015/4/10
1900		40 (38.00~42.00)	1.4 (1.33~1.47)	41.217	1.38	21.0	2015/3/28
				41.359	1.42	21.4	2015/4/8
				41.365	1.44	22.1	2015/4/20
2450		39.2 (37.24~41.16)	1.8 (1.71~1.89)	40.542	1.76	21.5	2015/4/14

**Note:**

- 1)The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2)KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3)The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

## 5.2 SYSTEM CHECK


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.

System Check	Measured Frequency (MHz)	Target SAR (1W) (+/-10%) 1-g(mW/g)	Measured SAR (Normalized to 1W)1-g(mW/g)	Liquid Temp. (°C)	Test Date
Head	750	8.46 (7.614~9.306)	8.16	21.3	2015/4/9
	835	9.43 (8.487~10.373)	9.80	21.1	2015/3/29
			9.68	21.2	2015/4/11
	1750	36.1 (32.49~39.71)	35.92	20.9	2015/4/7
			35.24	20.8	2015/4/10
	1900	39.8 (35.82~43.78)	39.28	21.0	2015/3/28
39.40			21.4	2015/4/8	
39.52			22.1	2015/4/20	
2450	51.5 (46.35~56.65)	54.24	21.5	2015/4/14	
Body	750	8.67 (7.803~9.537)	7.92	21.1	2015/4/13
			7.84	21.3	2015/4/15
	835	9.56 (8.604~10.516)	9.52	21.1	2015/4/13
			9.44	21.3	2015/4/15
			9.60	22.1	2015/8/1
	1750	37.9 (34.11~41.69)	35.56	21.0	2015/4/12
			35.92	22.1	2015/4/20
	1900	39.5 (35.55~43.45)	41.36	21.5	2015/4/11
			41.44	21.5	2015/4/14
			36.72	22.2	2015/7/31
2450	50.7 (45.63~55.77)	51.88	21.1	2015/4/14	

### 5.3 SYSTEM CHECK PROCEDURE

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

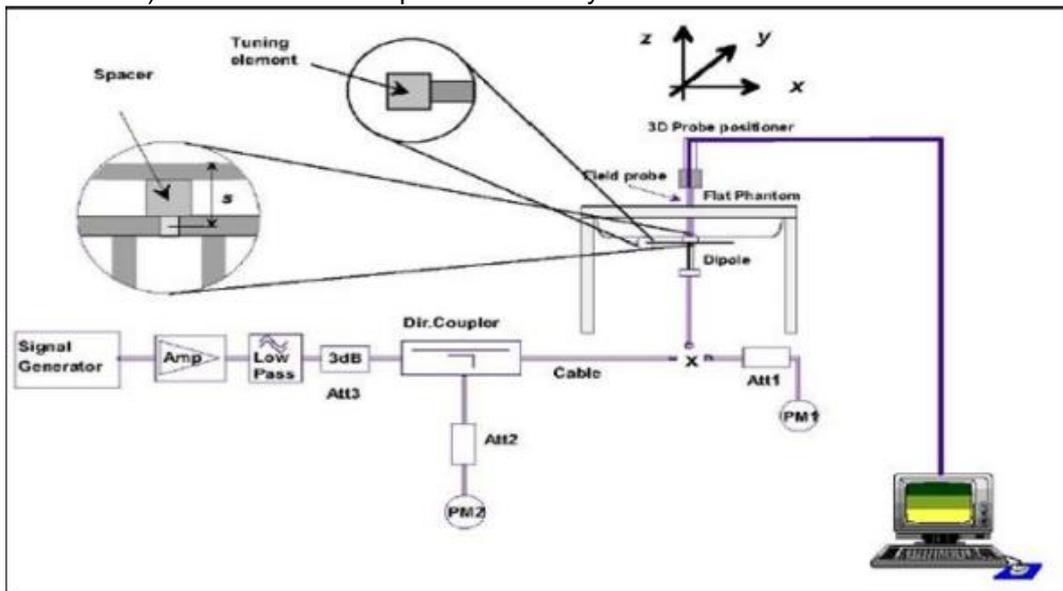

## **6.SAR MEASUREMENT VARIABILITY AND UNCERTAINTY**

### **6.1SAR MEASUREMENT VARIABILITY**

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r03, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 8.2.

### **6.2SAR MEASUREMENT UNCERTAINTY**

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis.

## **7.SAR TEST CONFIGURATION**

### **7.1GSM TEST CONFIGURATION**

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power level is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 10 for this EUT, it has at most 2 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 10 for this EUT, it has at most 2 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

## 7.2UMTS TEST CONFIGURATION

### 1. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the procedures description in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s" for WCDMA/HSDPA or applying the required inner loop power control procedure to maintain maximum output power while HSUPA is active. Result for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) Should be tabulated in the SAR report. All configuration that are not supported by the DUT or cannot be measured due to technical or equipment limitation should be clearly identified.

### 2. WCDMA

#### (1).Head SAR Measurements

SAR for Head exposure configurations in voice mode is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise SAR is measured on the maximum output channel in 12.2 kbps AMR with 3.4kbps SRB (signalling radio bearer) using the exposure configuration that results in the highest SAR in 12.2kbps RMC for that RF channel.

#### (2).Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCHn, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCHn configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

### 3. HSDPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The  $\beta_c$  and  $\beta_d$  gain factors for DPCCH and DPDCH were set according to the values in the below table,  $\beta_{hs}$  for HS-DPCCH is set automatically to the correct value when  $\Delta ACK, \Delta NACK,$

$\Delta CQI = 8$ . The variation of the  $\beta_c / \beta_d$  ratio causes a power reduction at sub-tests 2 - 4.

Sub-test <sup>o</sup>	$\beta_c$ <sup>o</sup>	$\beta_d$ <sup>o</sup>	$\beta_d$ (SF) <sup>o</sup>	$\beta_c / \beta_d$ <sup>o</sup>	$\beta_{hs}$ (1) <sup>o</sup>	CM(dB)(2) <sup>o</sup>	MPR (dB) <sup>o</sup>
1 <sup>o</sup>	2/15 <sup>o</sup>	15/15 <sup>o</sup>	64 <sup>o</sup>	2/15 <sup>o</sup>	4/15 <sup>o</sup>	0.0 <sup>o</sup>	0 <sup>o</sup>
2 <sup>o</sup>	12/15(3) <sup>o</sup>	15/15(3) <sup>o</sup>	64 <sup>o</sup>	12/15(3) <sup>o</sup>	24/15 <sup>o</sup>	1.0 <sup>o</sup>	0 <sup>o</sup>
3 <sup>o</sup>	15/15 <sup>o</sup>	8/15 <sup>o</sup>	64 <sup>o</sup>	15/8 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
4 <sup>o</sup>	15/15 <sup>o</sup>	4/15 <sup>o</sup>	64 <sup>o</sup>	15/4 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>

Note 1:  $\Delta ACK, \Delta NACK$  and  $\Delta CQI = 8$   $A_{hs} = \beta_{hs} / \beta_c = 30/15$   $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for  $\beta_c / \beta_d = 12/15$ ,  $\beta_{hs} / \beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the  $\beta_c / \beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Settings of required H-Set 1 QPSK acc. to 3GPP 34.121

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

#### 4. HSUPA

SAR for Body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the primary mode and the adjusted SAR is  $\leq 1.2W/kg$ , SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedures is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the “WCDMA Handset” and „Release 5 HSDPA Data Device” sections of 3G device.

#### Subtests for UMTS Release 6 HSUPA

Sub-test <sup>⊖</sup>	$\beta_c^{\ominus}$	$\beta_d^{\ominus}$	$\beta_d$ (SF) <sup>⊖</sup>	$\beta_c/\beta_d^{\ominus}$	$\beta_{hs}^{(1)}$ <sup>⊖</sup>	$\beta_{ec}^{\ominus}$	$\beta_{ad}^{\ominus}$	$\beta_a^{\ominus}$ (SF) <sup>⊖</sup>	$\beta_{ed}^{\ominus}$ (code) <sup>⊖</sup>	CM <sup>(2)</sup> <sup>⊖</sup> (dB) <sup>⊖</sup>	MP R <sup>⊖</sup> (dB) <sup>⊖</sup>	AG <sup>(4)</sup> <sup>⊖</sup> Index <sup>⊖</sup>	E-TFC I <sup>⊖</sup>
1 <sup>⊖</sup>	11/15 <sup>(3)</sup> <sup>⊖</sup>	15/15 <sup>(3)</sup> <sup>⊖</sup>	64 <sup>⊖</sup>	11/15 <sup>(3)</sup> <sup>⊖</sup>	22/15 <sup>⊖</sup>	209/225 <sup>⊖</sup>	1039/225 <sup>⊖</sup>	4 <sup>⊖</sup>	1 <sup>⊖</sup>	1.0 <sup>⊖</sup>	0.0 <sup>⊖</sup>	20 <sup>⊖</sup>	75 <sup>⊖</sup>
2 <sup>⊖</sup>	6/15 <sup>⊖</sup>	15/15 <sup>⊖</sup>	64 <sup>⊖</sup>	6/15 <sup>⊖</sup>	12/15 <sup>⊖</sup>	12/15 <sup>⊖</sup>	94/75 <sup>⊖</sup>	4 <sup>⊖</sup>	1 <sup>⊖</sup>	3.0 <sup>⊖</sup>	2.0 <sup>⊖</sup>	12 <sup>⊖</sup>	67 <sup>⊖</sup>
3 <sup>⊖</sup>	15/15 <sup>⊖</sup>	9/15 <sup>⊖</sup>	64 <sup>⊖</sup>	15/9 <sup>⊖</sup>	30/15 <sup>⊖</sup>	30/15 <sup>⊖</sup>	$\beta_{ad1}:47/15^{\ominus}$ $\beta_{ad2}:47/15^{\ominus}$	4 <sup>⊖</sup>	2 <sup>⊖</sup>	2.0 <sup>⊖</sup>	1.0 <sup>⊖</sup>	15 <sup>⊖</sup>	92 <sup>⊖</sup>
4 <sup>⊖</sup>	2/15 <sup>⊖</sup>	15/15 <sup>⊖</sup>	64 <sup>⊖</sup>	2/15 <sup>⊖</sup>	4/15 <sup>⊖</sup>	2/15 <sup>⊖</sup>	56/75 <sup>⊖</sup>	4 <sup>⊖</sup>	1 <sup>⊖</sup>	3.0 <sup>⊖</sup>	2.0 <sup>⊖</sup>	17 <sup>⊖</sup>	71 <sup>⊖</sup>
5 <sup>⊖</sup>	15/15 <sup>(4)</sup> <sup>⊖</sup>	15/15 <sup>(4)</sup> <sup>⊖</sup>	64 <sup>⊖</sup>	15/15 <sup>(4)</sup> <sup>⊖</sup>	30/15 <sup>⊖</sup>	24/15 <sup>⊖</sup>	134/15 <sup>⊖</sup>	4 <sup>⊖</sup>	1 <sup>⊖</sup>	1.0 <sup>⊖</sup>	0.0 <sup>⊖</sup>	21 <sup>⊖</sup>	81 <sup>⊖</sup>

Note 1:  $\Delta ACK, \Delta NACK$  and  $\Delta CQI=8$   $A_{hs} = \beta_{hs}/\beta_c = 30/15$   $\beta_{hs} = 30/15 * \beta_c^{\ominus}$

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference<sup>⊖</sup>

Note 3 : For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15^{\ominus}$

Note 4 : For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15^{\ominus}$

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g<sup>⊖</sup>

Note 6:  $\beta_{ad}$  can not be set directly; it is set by Absolute Grant Value.<sup>⊖</sup>

### HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

### 5. DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA apply the four subtests from HSDPA Release 5 except use fixed reference channel H-Set 12 for DC-HSDPA. And we can apply the same SAR test exclusion criteria used for Rel. 6 HSPA for Rel. 7 HSPA+ and Rel. 8 DC-HSDPA. That is, if the HSPA, HSPA+, or the DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for those modes is not required.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0 Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.


The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI"s
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Note:

1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.

2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

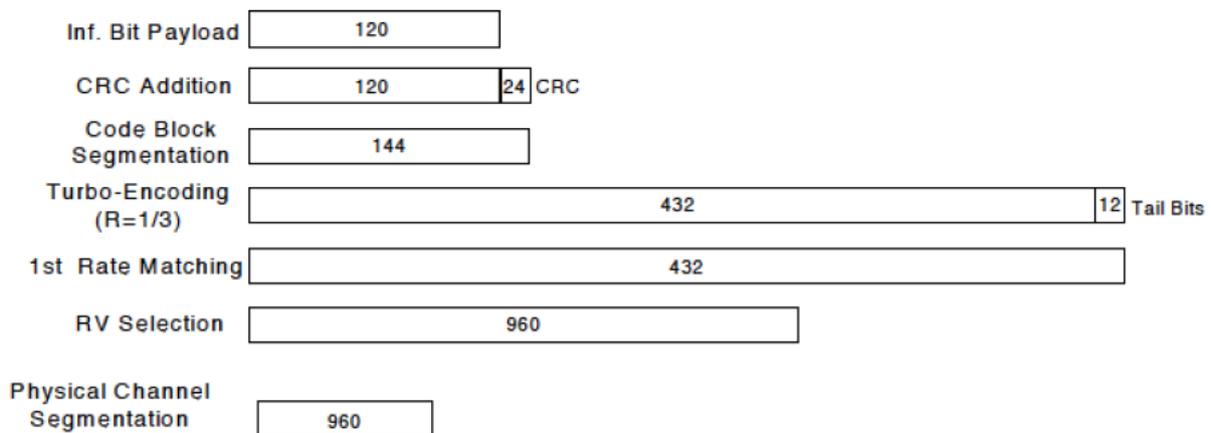

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test <sup>o</sup>	$\beta_c$ <sup>o</sup>	$\beta_d$ <sup>o</sup>	$\beta_d$ (SF) <sup>o</sup>	$\beta_c/\beta_d$ <sup>o</sup>	$\beta_{hs}$ (1) <sup>o</sup>	CM(dB)(2) <sup>o</sup>	MPR (dB) <sup>o</sup>
1 <sup>o</sup>	2/15 <sup>o</sup>	15/15 <sup>o</sup>	64 <sup>o</sup>	2/15 <sup>o</sup>	4/15 <sup>o</sup>	0.0 <sup>o</sup>	0 <sup>o</sup>
2 <sup>o</sup>	12/15(3) <sup>o</sup>	15/15(3) <sup>o</sup>	64 <sup>o</sup>	12/15(3) <sup>o</sup>	24/15 <sup>o</sup>	1.0 <sup>o</sup>	0 <sup>o</sup>
3 <sup>o</sup>	15/15 <sup>o</sup>	8/15 <sup>o</sup>	64 <sup>o</sup>	15/8 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
4 <sup>o</sup>	15/15 <sup>o</sup>	4/15 <sup>o</sup>	64 <sup>o</sup>	15/4 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI=8  $A_{hs} = \beta_{hs}/\beta_c = 30/15$   $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCCH and HS-DPCCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$

Up commands are set continuously to set the UE to Max power.

**Note:**

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for it just can operate in Release 8.

### 7.3 LTE TEST CONFIGURATION

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r03. The CMW500 Wide Band Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

#### 1. Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

#### 2. MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

### 3. A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of “NS\_01” on the base station simulator.

### 4. LTE procedures for SAR testing

#### A) Largest channel bandwidth standalone SAR test requirements

##### i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

##### ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

##### iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

##### iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

#### B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

## 7.4 WIFI 2.4G TEST CONFIGURATION

For the 802.11b SAR tests, a communication link is set up with the test mode software for WiFi mode test. The Absolute Radio Frequency Channel Number(ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

### ✧ 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

### ✧ 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

## 8. TEST RESULT

### 8.1 CONDUCTED POWER RESULTS

#### 8.1.1 CONDUCTED POWER MEASUREMENTS OF GSM850

GSM850		Tune Up	Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
			128CH	190CH	251CH		128CH	190CH	251CH
GSM (CS)		<b>33.5</b>	33.37	32.99	33.19	-9.19	24.18	23.8	24
GPRS/	1 Tx Slot	<b>33.5</b>	33.29	32.98	33.12	-9.19	24.1	23.79	23.93
	2 Tx Slots	<b>33.5</b>	33.01	32.71	33.03	-6.13	26.88	<b>26.58</b>	26.9
EDGE (GMSK)	1 Tx Slot	<b>33.5</b>	33.33	33.05	33.17	-9.19	24.14	23.86	23.98
	2 Tx Slots	<b>33.5</b>	33.12	32.82	33.09	-6.13	26.99	26.69	26.96
EDGE (8PSK)	1 Tx Slot	<b>28</b>	27.17	27.15	27.19	-9.19	17.98	17.96	18
	2 Tx Slots	<b>28</b>	27.1	27.09	27.07	-6.13	20.97	20.96	20.94

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 time slots.
- 3) Per KDB941225 D01v03, the bolded GPRS2Tx mode was selected for SAR testing according to the highest frame –averaged output power table.

### 8.1.2 CONDUCTED POWER MEASUREMENTS OF GSM1900

GSM1900		Tune Up	Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
			512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		<b>30.5</b>	29.95	29.72	29.57	-9.19	20.76	20.53	20.38
GPRS/	1 Tx Slot	<b>30.5</b>	29.83	29.65	29.5	-9.19	20.64	20.46	20.31
	2 Tx Slots	<b>30.5</b>	29.56	29.46	29.25	-6.13	23.43	<b>23.33</b>	23.12
EDGE (GMSK)	1 Tx Slot	<b>30.5</b>	29.81	29.63	29.56	-9.19	20.62	20.44	20.37
	2 Tx Slots	<b>30.5</b>	29.62	29.5	29.33	-6.13	23.49	23.37	23.2
EDGE (8PSK)	1 Tx Slot	<b>27</b>	26.56	26.54	26.61	-9.19	17.37	17.35	17.42
	2 Tx Slots	<b>27</b>	26.52	26.6	26.57	-6.13	20.39	20.47	20.44

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 time slots.
- 3) Per KDB941225 D01v03, the bolded GPRS 2Tx mode was selected for SAR testing according to the highest frame –averaged output power table.

### 8.1.3 CONDUCTED POWER MEASUREMENTS OF UMTS1900 Band II

1) Conducted power measurement results of UMTS1900 Band II(Hotspot disabled)

UMTS1900 (Band II)		Tune-up	SAR Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	<b>24</b>	23.2	23.43	23.22
	64kbps RMC	<b>24</b>	23.25	23.39	23.17
	144kbps RMC	<b>24</b>	23.2	23.37	23.14
	384kbps RMC	<b>24</b>	23.39	23.36	23.12
HSDPA	Subtest 1	<b>23.5</b>	22.61	22.43	22.14
	Subtest 2	<b>23.5</b>	22.57	22.31	21.94
	Subtest 3	<b>22.5</b>	22.07	21.6	21.39
	Subtest 4	<b>22.5</b>	22.05	21.59	21.38
HSUPA	Subtest 1	<b>22.5</b>	22.25	21.36	21.96
	Subtest 2	<b>22</b>	21.09	21.17	20.98
	Subtest 3	<b>22</b>	20.88	21.06	20.34
	Subtest 4	<b>22.5</b>	21	21.66	21.27
	Subtest 5	<b>23</b>	21.37	22.06	21.57
DC-HSDPA	Subtest 1	<b>23.5</b>	22.61	22.43	22.14
	Subtest 2	<b>23.5</b>	22.57	22.31	21.94
	Subtest 3	<b>22.5</b>	22.07	21.6	21.39
	Subtest 4	<b>22.5</b>	22.05	21.59	21.38

2) Conducted power measurement results of UMTS1900 Band II(Hotspot activated)

UMTS1900 (Band II)		Tune-up	SAR Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	<b>22.8</b>	21.15	21.45	21.2
	64kbps RMC	<b>22.8</b>	21.11	21.38	21.18
	144kbps RMC	<b>22.8</b>	21.07	21.32	21.15
	384kbps RMC	<b>22.8</b>	21.14	21.35	21.13
HSDPA	Subtest 1	<b>22.3</b>	20.59	21.43	21.16
	Subtest 2	<b>22.3</b>	20.53	21.48	21.13
	Subtest 3	<b>22.3</b>	21.08	21.25	21.2
	Subtest 4	<b>21.3</b>	21.13	21.22	21.14
HSUPA	Subtest 1	<b>21.3</b>	20.24	19.97	20.1
	Subtest 2	<b>20.8</b>	19.52	19.04	19.01
	Subtest 3	<b>20.8</b>	18.91	19.06	19.07
	Subtest 4	<b>21.3</b>	19.52	19.63	19.35
	Subtest 5	<b>21.8</b>	19.97	20.00	19.95
DC-HSDPA	Subtest 1	<b>22.3</b>	20.59	21.43	21.16
	Subtest 2	<b>22.3</b>	20.53	21.48	21.13
	Subtest 3	<b>22.3</b>	21.08	21.25	21.2
	Subtest 4	<b>21.3</b>	21.13	21.22	21.14

Note:

1) The conducted power of UMTS Band II is measured with RMS detector.

2)Note: Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

#### 8.1.4 CONDUCTED POWER MEASUREMENTS OF UMTS1700 Band 4

1) Conducted power measurement results of UMTS1700 Band IV (Hotspot disabled)

UMTS1700 (Band IV)		Tune-up	SAR Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	<b>24</b>	23.31	23.66	23.64
	64kbps RMC	<b>24</b>	23.37	23.43	23.46
	144kbps RMC	<b>24</b>	23.33	23.4	23.43
	384kbps RMC	<b>24</b>	23.4	23.37	23.41
HSDPA	Subtest 1	<b>23.5</b>	22.85	22.44	22.56
	Subtest 2	<b>23.5</b>	22.39	22.3	22.33
	Subtest 3	<b>22.5</b>	21.76	21.7	21.75
	Subtest 4	<b>22.5</b>	21.72	21.69	21.74
HSUPA	Subtest 1	<b>22.5</b>	21.54	21.54	22.25
	Subtest 2	<b>22</b>	21.23	21.13	21.16
	Subtest 3	<b>22</b>	20.53	20.43	21.22
	Subtest 4	<b>22.5</b>	21.67	21.45	21.53
	Subtest 5	<b>23</b>	22.06	21.7	21.8
DC-HSDPA	Subtest 1	<b>23.5</b>	22.85	22.44	22.56
	Subtest 2	<b>23.5</b>	22.39	22.3	22.33
	Subtest 3	<b>22.5</b>	21.76	21.7	21.75
	Subtest 4	<b>22.5</b>	21.72	21.69	21.74

2) Conducted power measurement results of UMTS1700 Band IV(Hotspot activated)

UMTS1700 (Band IV)		Tune-up	SAR Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	<b>18.8</b>	17.36	17.81	17.67
	64kbps RMC	<b>18.8</b>	17.24	17.68	17.75
	144kbps RMC	<b>18.8</b>	17.23	17.62	17.66
	384kbps RMC	<b>18.8</b>	17.24	17.68	17.72
HSDPA	Subtest 1	<b>18.3</b>	17.38	17.71	17.74
	Subtest 2	<b>18.3</b>	17.33	17.73	17.74
	Subtest 3	<b>17.3</b>	16.64	16.64	16.47
	Subtest 4	<b>17.3</b>	16.58	16.63	16.48
HSUPA	Subtest 1	<b>17.3</b>	16.61	15.65	16.29
	Subtest 2	<b>16.8</b>	15.91	15.06	15
	Subtest 3	<b>16.8</b>	15.31	15.12	15.02
	Subtest 4	<b>17.3</b>	16.7	16.89	17.71
	Subtest 5	<b>17.3</b>	16.18	15.45	17.19
DC-HSDPA	Subtest 1	<b>18.3</b>	17.38	17.71	17.74
	Subtest 2	<b>18.3</b>	17.33	17.73	17.74
	Subtest 3	<b>17.3</b>	16.64	16.64	16.47
	Subtest 4	<b>17.3</b>	16.58	16.63	16.48

Note:

1) The conducted power of UMTS Band II is measured with RMS detector.

2)Note: Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

### 8.1.5 CONDUCTED POWER MEASUREMENTS OF UMTS 850 Band V

UMTS850 (Band V)		Tune-up	SAR Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	<b>24</b>	23.19	23.38	23.56
	64kbps RMC	<b>24</b>	23.14	23.29	23.42
	144kbps RMC	<b>24</b>	23.21	23.28	23.39
	384kbps RMC	<b>24</b>	23.19	23.26	23.37
HSDPA	Subtest 1	<b>23.5</b>	22.53	22.26	22.45
	Subtest 2	<b>23.5</b>	22.21	22.16	22.39
	Subtest 3	<b>22.5</b>	21.67	21.56	21.8
	Subtest 4	<b>22.5</b>	21.64	21.56	21.9
HSUPA	Subtest 1	<b>22.5</b>	21.34	22.04	22.26
	Subtest 2	<b>22</b>	21.11	21.04	21.19
	Subtest 3	<b>22</b>	20.33	20.95	21.19
	Subtest 4	<b>22.5</b>	21.45	21.48	21.66
	Subtest 5	<b>23</b>	21.72	21.57	22
DC-HSDPA	Subtest 1	<b>23.5</b>	22.53	22.26	22.45
	Subtest 2	<b>23.5</b>	22.21	22.16	22.39
	Subtest 3	<b>22.5</b>	21.67	21.56	21.8
	Subtest 4	<b>22.5</b>	21.64	21.56	21.9

Note:

1) The conducted power of UMTS Band V is measured with RMS detector.

2) Note: Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

### 8.1.6 CONDUCTED POWER MEASUREMENTS OF LTE Band 2

1) Conducted power measurement results of LTE Band 2 (Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18607	18900	19193
1.4MHz	QPSK	1	0	<b>23.40</b>	21.87	21.93	21.78
		1	3	<b>23.40</b>	22.00	21.94	21.88
		1	5	<b>23.40</b>	21.92	22.03	21.79
		12	0	<b>23.40</b>	21.80	21.93	21.78
		12	2	<b>23.40</b>	21.81	21.98	21.78
		12	3	<b>23.40</b>	21.82	21.95	21.64
		25	0	<b>22.40</b>	20.60	20.88	20.64
	16QAM	1	0	<b>22.40</b>	21.43	21.52	21.14
		1	3	<b>22.40</b>	21.60	21.57	21.24
		1	5	<b>22.40</b>	21.54	21.53	21.32
		12	0	<b>22.40</b>	20.55	20.35	20.99
		12	2	<b>22.40</b>	20.80	21.14	21.07
		12	3	<b>22.40</b>	20.56	20.83	21.19
		25	0	<b>21.40</b>	19.63	19.80	19.80
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18615	18900	19185
3MHz	QPSK	1	0	<b>23.40</b>	22.03	22.06	21.94
		1	7	<b>23.40</b>	22.49	22.20	22.39
		1	14	<b>23.40</b>	22.13	22.09	21.94
		12	0	<b>22.40</b>	20.68	20.91	20.80
		12	4	<b>22.40</b>	20.80	20.91	20.74
		12	7	<b>22.40</b>	20.76	20.89	20.66
		25	0	<b>22.40</b>	20.77	20.92	20.75
	16QAM	1	0	<b>22.40</b>	20.71	21.05	20.81
		1	7	<b>22.40</b>	20.72	21.40	20.98
		1	14	<b>22.40</b>	20.63	21.13	20.81
		12	0	<b>21.40</b>	19.80	19.84	19.63
		12	4	<b>21.40</b>	20.04	19.76	19.70
		12	7	<b>21.40</b>	19.81	19.83	19.62
		25	0	<b>21.40</b>	19.76	20.11	19.92

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18625	18900	19175
5MHz	QPSK	1	0	<b>23.40</b>	21.83	22.16	21.86
		1	13	<b>23.40</b>	21.87	22.15	21.91
		1	24	<b>23.40</b>	21.87	22.06	21.85
		12	0	<b>22.40</b>	20.77	20.93	20.82
		12	6	<b>22.40</b>	20.74	20.86	20.84
		12	11	<b>22.40</b>	20.69	20.90	20.80
		25	0	<b>22.40</b>	20.78	20.94	20.76
	16QAM	1	0	<b>22.40</b>	20.64	20.89	20.69
		1	13	<b>22.40</b>	20.57	20.80	20.60
		1	24	<b>22.40</b>	20.62	20.71	20.49
		12	0	<b>21.40</b>	19.98	19.70	19.74
		12	6	<b>21.40</b>	20.05	19.71	19.77
		12	11	<b>21.40</b>	19.60	19.95	19.73
		25	0	<b>21.40</b>	19.84	19.92	19.74
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18650	18900	19150
10MHz	QPSK	1	0	<b>23.40</b>	22.16	22.34	22.51
		1	25	<b>23.40</b>	22.17	22.33	22.57
		1	49	<b>23.40</b>	22.20	22.17	22.38
		25	0	<b>22.40</b>	20.82	20.84	20.74
		25	13	<b>22.40</b>	20.68	20.93	20.72
		25	25	<b>22.40</b>	20.71	21.02	20.85
		50	0	<b>22.40</b>	20.72	20.89	20.72
	16QAM	1	0	<b>22.40</b>	21.00	21.05	20.72
		1	25	<b>22.40</b>	21.09	20.87	21.22
		1	49	<b>22.40</b>	21.33	21.00	21.93
		25	0	<b>21.40</b>	19.94	19.98	19.70
		25	13	<b>21.40</b>	19.90	19.97	19.78
		25	25	<b>21.40</b>	19.73	19.94	19.79
		50	0	<b>21.40</b>	19.67	19.83	19.68

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18675	18900	19125
15MHz	QPSK	1	0	<b>23.40</b>	22.25	22.24	22.32
		1	38	<b>23.40</b>	22.10	22.16	22.13
		1	74	<b>23.40</b>	22.01	22.05	22.05
		36	0	<b>22.40</b>	20.73	20.94	20.80
		36	18	<b>22.40</b>	20.75	20.93	20.71
		36	39	<b>22.40</b>	20.77	20.90	20.66
		75	0	<b>22.40</b>	20.69	20.92	20.76
	16QAM	1	0	<b>22.40</b>	21.69	21.26	21.25
		1	38	<b>22.40</b>	21.70	21.21	21.59
		1	74	<b>22.40</b>	21.70	21.24	21.50
		36	0	<b>21.40</b>	19.95	20.03	19.98
		36	18	<b>21.40</b>	19.85	20.00	19.91
		36	39	<b>21.40</b>	19.87	19.98	19.65
		75	0	<b>21.40</b>	19.95	20.08	19.90
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18700	18900	19100
20MHz	QPSK	1	0	<b>23.40</b>	22.07	22.25	22.29
		1	50	<b>23.40</b>	21.95	<b>22.32</b>	22.24
		1	99	<b>23.40</b>	21.90	22.15	21.92
		50	0	<b>22.40</b>	20.80	<b>20.96</b>	20.89
		50	25	<b>22.40</b>	20.76	20.85	20.81
		50	50	<b>22.40</b>	20.75	20.81	20.82
		100	0	<b>22.40</b>	20.74	20.93	20.83
	16QAM	1	0	<b>22.40</b>	21.40	21.40	21.61
		1	50	<b>22.40</b>	21.36	21.46	21.59
		1	99	<b>22.40</b>	21.19	21.30	21.35
		50	0	<b>21.40</b>	19.96	20.15	19.89
		50	25	<b>21.40</b>	19.95	20.13	19.91
		50	50	<b>21.40</b>	19.91	20.09	19.83
		100	0	<b>21.40</b>	19.84	19.92	19.75

2) Conducted power measurement results of LTE Band 2 (Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18607	18900	19193
1.4MHz	QPSK	1	0	21.30	20.72	20.38	20.60
		1	3	21.30	20.45	20.63	20.55
		1	5	21.30	20.54	20.77	20.76
		12	0	21.30	20.60	21.02	20.72
		12	2	21.30	20.34	20.40	20.31
		12	3	21.30	20.80	20.41	20.42
		25	0	21.30	20.32	20.64	20.39
	16QAM	1	0	21.30	20.72	20.40	20.64
		1	3	21.30	20.75	20.42	20.75
		1	5	21.30	20.50	20.45	21.03
		12	0	21.30	20.34	20.47	20.32
		12	2	21.30	20.42	20.36	20.33
		12	3	21.30	20.40	20.42	20.42
		25	0	21.30	20.50	21.12	21.20
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18615	18900	19185
3MHz	QPSK	1	0	21.30	20.70	20.64	21.03
		1	7	21.30	20.90	20.40	20.32
		1	14	21.30	20.35	20.40	20.33
		12	0	21.30	20.42	20.73	20.42
		12	4	21.30	20.40	20.56	20.40
		12	7	21.30	20.31	20.38	20.42
		25	0	21.30	20.42	20.63	21.12
	16QAM	1	0	21.30	21.20	20.77	20.73
		1	7	21.30	20.79	21.02	21.26
		1	14	21.30	20.43	20.40	20.32
		12	0	21.30	20.35	20.41	20.34
		12	4	21.30	20.15	20.30	20.45
		12	7	21.30	20.34	20.47	20.32
		25	0	21.30	20.42	20.36	20.33
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18625	18900	19175
5MHz	QPSK	1	0	21.30	20.34	20.47	20.32
		1	13	21.30	20.42	20.36	20.33

		1	24	<b>21.30</b>	20.40	20.42	20.42
		12	0	<b>21.30</b>	20.50	21.12	21.20
		12	6	<b>21.30</b>	20.65	20.73	20.79
		12	13	<b>21.30</b>	20.42	21.26	20.43
		25	0	<b>21.30</b>	20.45	20.32	20.34
	16QAM	1	0	<b>21.30</b>	20.75	20.34	20.51
		1	13	<b>21.30</b>	20.31	20.54	20.44
		1	24	<b>21.30</b>	20.35	20.82	20.47
		12	0	<b>21.30</b>	20.13	20.47	20.45
		12	6	<b>21.30</b>	20.40	20.41	20.71
		12	13	<b>21.30</b>	20.32	20.34	21.10
	25	0	<b>21.30</b>	20.45	20.27	21.01	
	<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Tune-up</b>	<b>Low</b>	<b>Mid</b>
					18650	18900	19150
<b>10MHz</b>	QPSK	1	0	<b>21.30</b>	20.50	20.56	20.23
		1	25	<b>21.30</b>	20.64	20.37	21.00
		1	49	<b>21.30</b>	20.42	20.43	20.70
		25	0	<b>21.30</b>	20.62	20.32	20.74
		25	13	<b>21.30</b>	20.45	20.31	20.98
		25	25	<b>21.30</b>	20.58	20.65	21.20
	16QAM	50	0	<b>21.30</b>	20.61	20.36	20.63
		1	0	<b>21.30</b>	20.31	20.54	20.44
		1	25	<b>21.30</b>	20.32	20.03	20.34
		1	49	<b>21.30</b>	20.23	20.33	20.40
		25	0	<b>21.30</b>	20.32	20.42	20.32
		25	13	<b>21.30</b>	20.14	20.44	20.41
		25	25	<b>21.30</b>	20.75	20.47	20.72
50	0	<b>21.30</b>	20.36	20.32	20.65		
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Tune-up</b>	<b>Low</b>	<b>Mid</b>	<b>High</b>
					18675	18900	19125
<b>15MHz</b>	QPSK	1	0	<b>21.30</b>	20.58	20.65	21.20
		1	38	<b>21.30</b>	20.61	20.36	20.63
		1	74	<b>21.30</b>	20.31	20.54	20.44
		36	0	<b>21.30</b>	20.32	20.03	20.34
		36	18	<b>21.30</b>	20.23	20.33	20.40
		36	39	<b>21.30</b>	20.15	20.34	20.36
		75	0	<b>21.30</b>	20.61	20.43	20.44
	16QAM	1	0	<b>21.30</b>	20.43	20.34	21.21
		1	38	<b>21.30</b>	21.30	20.76	20.75

		1	74	<b>21.30</b>	20.62	21.05	21.20
		36	0	<b>21.30</b>	20.44	20.34	20.52
		36	18	<b>21.30</b>	20.31	20.51	20.34
		36	39	<b>21.30</b>	20.34	20.47	20.32
		75	0	<b>21.30</b>	20.42	20.36	20.33
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18700	18900	19100
20MHz	QPSK	1	0	<b>21.30</b>	<b>20.68</b>	20.57	20.46
		1	50	<b>21.30</b>	20.65	20.38	20.65
		1	99	<b>21.30</b>	20.38	20.45	20.42
		50	0	<b>21.30</b>	<b>20.36</b>	20.30	20.35
		50	25	<b>21.30</b>	20.32	20.30	20.30
		50	50	<b>21.30</b>	20.33	20.40	20.32
		100	0	<b>21.30</b>	20.31	20.38	20.42
	16QAM	1	0	<b>21.30</b>	20.42	20.63	21.12
		1	50	<b>21.30</b>	21.20	20.77	20.73
		1	99	<b>21.30</b>	20.79	21.02	21.26
		50	0	<b>21.30</b>	20.43	20.40	20.32
		50	25	<b>21.30</b>	20.35	20.41	20.34
		50	50	<b>21.30</b>	20.30	20.46	20.31
		100	0	<b>21.30</b>	20.41	20.35	20.34

### 8.1.7 CONDUCTED POWER MEASUREMENTS OF LTE Band 4

1) Conducted power measurement results of LTE Band 4 (Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19957	20175	20393
1.4MHz	QPSK	1	0	23.40	22.05	22.03	21.91
		1	3	23.40	22.68	21.9	22.02
		1	5	23.40	22.05	22.17	22
		3	0	23.40	22	21.99	22.01
		3	2	23.40	22.07	22.01	22.08
		3	3	23.40	22.15	21.98	22.06
	16QAM	6	0	22.40	21.06	20.89	21.02
		1	0	22.40	21.67	21.11	21.69
		1	3	22.40	21.76	21.15	21.76
		1	5	22.40	21.45	21.48	21.73
		3	0	22.40	20.56	21.02	20.94
		3	2	22.40	21.05	21.22	21.03
		3	3	22.40	20.91	21.21	20.97
	6	0	21.40	20.24	20.27	19.98	
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19965	20175	20385
3MHz	QPSK	1	0	23.40	22.69	22.07	22.23
		1	7	23.40	22.19	22.35	22.19
		1	14	23.40	22.15	22.08	22.22
		8	0	22.40	21.08	20.95	20.97
		8	4	22.40	20.92	20.92	20.99
		8	7	22.40	21.07	20.9	21
		15	0	22.40	21.03	21.08	21
	16QAM	1	0	22.40	21	21.2	21.25
		1	7	22.40	22	21.69	21.94
		1	14	22.40	21	20.94	21.5
		8	0	21.40	19.99	20.02	19.91
		8	4	21.40	19.96	20.2	19.84
		8	7	21.40	20.12	20.11	19.87
		15	0	21.40	19.9	20.25	20.11
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19975	20175	20375
5MHz	QPSK	1	0	23.40	22.26	21.71	21.48

			1	13	<b>23.40</b>	22.29	21.7	21.9
			1	24	<b>23.40</b>	21.99	21.74	22
			12	0	<b>22.40</b>	21.01	21.02	21.04
			12	6	<b>22.40</b>	21.02	21.04	21
			12	13	<b>22.40</b>	20.97	20.93	21.02
			25	0	<b>22.40</b>	21.1	20.98	20.99
		16QAM	1	0	<b>22.40</b>	20.71	21.14	20.8
			1	13	<b>22.40</b>	20.78	21.05	20.83
			1	24	<b>22.40</b>	20.83	21.01	20.87
			12	0	<b>21.40</b>	20.3	20.04	20.2
			12	6	<b>21.40</b>	20.21	20.12	20.21
			12	13	<b>21.40</b>	20.18	20.16	20.13
			25	0	<b>21.40</b>	20.16	20.21	20.21
		<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Tune-up</b>	<b>Low</b>	<b>Mid</b>
					20000	20175	20350	
<b>10MHz</b>	QPSK	1	0	<b>23.40</b>	22.35	22.16	22.23	
		1	25	<b>23.40</b>	22.51	22.24	22.15	
		1	49	<b>23.40</b>	22.68	22.2	22.24	
		25	0	<b>22.40</b>	21.15	21.01	20.91	
		25	13	<b>22.40</b>	21.02	21.02	20.97	
		25	25	<b>22.40</b>	21	20.89	21.11	
		50	0	<b>22.40</b>	21.06	21.06	20.95	
	16QAM	1	0	<b>22.40</b>	21.21	20.13	22	
		1	25	<b>22.40</b>	21.39	21.18	22	
		1	49	<b>22.40</b>	21.01	21.06	22.18	
		25	0	<b>21.40</b>	20.19	20.13	19.96	
		25	13	<b>21.40</b>	19.97	20	20.03	
		25	25	<b>21.40</b>	19.96	20	19.96	
		50	0	<b>21.40</b>	20.02	19.99	19.87	
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Tune-up</b>	<b>Low</b>	<b>Mid</b>	<b>High</b>	
					20025	20175	20325	
<b>15MHz</b>	QPSK	1	0	<b>23.40</b>	22.49	22.22	22.35	
		1	38	<b>23.40</b>	22.2	21.98	22.21	
		1	74	<b>23.40</b>	22.17	21.98	22.32	
		36	0	<b>22.40</b>	21.06	21.08	20.92	
		36	18	<b>22.40</b>	20.96	20.99	20.96	
		36	39	<b>22.40</b>	20.86	20.92	20.95	
		75	0	<b>22.40</b>	20.95	20.98	20.96	
	16QAM	1	0	<b>22.40</b>	22.04	21.38	21.92	

		1	38	<b>22.40</b>	21.88	21.17	21.7
		1	74	<b>22.40</b>	21.87	21.31	21.85
		36	0	<b>21.40</b>	20.26	20.17	19.94
		36	18	<b>21.40</b>	20.21	20.09	19.97
		36	39	<b>21.40</b>	20.06	19.94	19.97
		75	0	<b>21.40</b>	20.04	19.87	20.11
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20050	20175	20300
20MHz	QPSK	1	0	<b>23.4</b>	22.24	21.93	22.2
		1	50	<b>23.4</b>	21.98	21.82	<b>22.41</b>
		1	99	<b>23.4</b>	21.78	21.73	22.04
		50	0	<b>22.4</b>	<b>21.06</b>	20.98	20.99
		50	25	<b>22.4</b>	20.86	20.96	20.95
		50	50	<b>22.4</b>	20.86	20.92	20.93
		100	0	<b>22.4</b>	20.85	20.85	20.99
	16QAM	1	0	<b>22.4</b>	21.79	21.09	21.69
		1	50	<b>22.4</b>	21.83	21.1	21.7
		1	99	<b>22.4</b>	21.67	20.92	21.56
		50	0	<b>21.4</b>	20.17	20.16	20.03
		50	25	<b>21.4</b>	19.98	20.14	19.9
		50	50	<b>21.4</b>	20.02	20.06	19.89
		100	0	<b>21.4</b>	20.02	20.04	19.84

2) Conducted power measurement results of LTE Band 4(Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19957	20175	20393
1.4MHz	QPSK	1	0	19.00	17.32	17.54	17.43
		1	3	19.00	17.63	17.43	17.36
		1	5	19.00	17.25	17.32	17.42
		3	0	19.00	17.23	17.83	17.23
		3	2	19.00	17.14	17.56	17.41
		3	3	19.00	17.52	17.33	17.5
	16QAM	6	0	19.00	17.36	17.3	17.25
		1	0	19.00	17.9	17.4	17.8
		1	3	19.00	17.53	17.55	17.54
		1	5	19.00	17.35	17.35	17.44
		3	0	19.00	17.42	17.68	17.21
		3	2	19.00	17.23	17.22	17.23
		3	3	19.00	17.43	17.42	17.39
		6	0	19.00	17.57	17.53	17.41
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19965	20175	20385
3MHz	QPSK	1	0	19.00	17.35	17.25	17.65
		1	7	19.00	17.25	17.32	17.42
		1	14	19.00	17.23	17.83	17.23
		8	0	19.00	17.14	17.56	17.41
		8	4	19.00	17.52	17.33	17.5
		8	7	19.00	17.36	17.32	17.25
		15	0	19.00	17.91	17.41	17.8
	16QAM	1	0	19.00	17.53	17.55	17.54
		1	7	19.00	17.35	17.35	17.44
		1	14	19.00	17.42	17.68	17.21
		8	0	19.00	17.56	17.56	17.15
		8	4	19.00	17.25	17.54	17.45
		8	7	19.00	17.64	17.62	17.41
		15	0	19.00	17.46	17.52	17.13
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19975	20175	20375
5MHz	QPSK	1	0	19.00	17.57	17.64	17.55

			1	13	<b>19.00</b>	17.48	17.28	17.69
			1	24	<b>19.00</b>	17.6	17.5	17.73
			12	0	<b>19.00</b>	17.74	17.62	17.68
			12	6	<b>19.00</b>	17.65	17.68	17.63
			12	13	<b>19.00</b>	17.64	17.6	17.62
			25	0	<b>19.00</b>	17.65	17.65	17.58
		16QAM	1	0	<b>19.00</b>	17.52	17.52	18.13
			1	13	<b>19.00</b>	17.43	17.25	17.6
			1	24	<b>19.00</b>	17.42	17.42	17.38
			12	0	<b>19.00</b>	17.91	17.53	17.44
			12	6	<b>19.00</b>	17.72	17.58	17.53
			12	13	<b>19.00</b>	17.59	17.5	17.44
			25	0	<b>19.00</b>	17.77	17.76	17.59
		<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Tune-up</b>	<b>Low</b>	<b>Mid</b>
					20000	20175	20350	
<b>10MHz</b>	QPSK	1	0	<b>19.00</b>	17.94	17.99	17.75	
		1	25	<b>19.00</b>	18	18.02	17.87	
		1	49	<b>19.00</b>	17.76	17.87	17.72	
		25	0	<b>19.00</b>	17.64	17.76	17.62	
		25	13	<b>19.00</b>	17.63	17.77	17.52	
		25	25	<b>19.00</b>	17.61	17.67	17.64	
		50	0	<b>19.00</b>	17.67	17.75	17.57	
	16QAM	1	0	<b>19.00</b>	18.14	18.42	18.56	
		1	25	<b>19.00</b>	17.68	18.31	17.84	
		1	49	<b>19.00</b>	17.72	18.17	17.65	
		25	0	<b>19.00</b>	17.83	17.67	17.68	
		25	13	<b>19.00</b>	17.93	17.69	17.56	
		25	25	<b>19.00</b>	17.72	17.68	17.66	
		50	0	<b>19.00</b>	17.61	17.65	17.54	
<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Tune-up</b>	<b>Low</b>	<b>Mid</b>	<b>High</b>	
					20025	20175	20325	
<b>15MHz</b>	QPSK	1	0	<b>19.00</b>	17.98	17.99	17.65	
		1	38	<b>19.00</b>	17.77	17.84	17.74	
		1	74	<b>19.00</b>	17.73	17.9	17.51	
		36	0	<b>19.00</b>	17.74	17.69	17.68	
		36	18	<b>19.00</b>	17.67	17.61	17.59	
		36	39	<b>19.00</b>	17.61	17.5	17.57	
		75	0	<b>19.00</b>	17.7	17.59	17.55	
		16QAM	1	0	<b>19.00</b>	17.11	18.12	18.12

		1	38	<b>19.00</b>	17.75	17.78	18.66
		1	74	<b>19.00</b>	17.13	18.24	18.83
		36	0	<b>19.00</b>	17.9	17.48	17.66
		36	18	<b>19.00</b>	17.83	17.5	17.48
		36	39	<b>19.00</b>	17.72	17.44	17.45
		75	0	<b>19.00</b>	17.76	17.82	17.65
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20050	20175	20300
20MHz	QPSK	1	0	<b>19.00</b>	17.43	17.58	17.65
		1	50	<b>19.00</b>	17.21	<b>17.80</b>	17.50
		1	99	<b>19.00</b>	17.35	17.50	17.13
		50	0	<b>19.00</b>	17.44	<b>17.60</b>	17.60
		50	25	<b>19.00</b>	17.37	17.50	17.52
		50	50	<b>19.00</b>	17.43	17.53	17.49
		100	0	<b>19.00</b>	17.40	17.51	17.48
	16QAM	1	0	<b>19.00</b>	17.40	18.35	18.12
		1	50	<b>19.00</b>	17.35	18.21	17.91
		1	99	<b>19.00</b>	17.21	18.18	18.13
		50	0	<b>19.00</b>	17.38	17.48	17.62
		50	25	<b>19.00</b>	17.32	17.52	17.53
		50	50	<b>19.00</b>	17.38	17.54	17.47
		100	0	<b>19.00</b>	17.33	17.52	17.44

### 8.1.8 CONDUCTED POWER MEASUREMENTS OF LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20407	20525	20643
1.4MHz	QPSK	1	0	23.4	22.03	21.88	22.09
		1	3	23.4	22.04	21.92	22.07
		1	5	23.4	21.82	21.85	21.94
		3	0	23.4	21.76	21.93	22.02
		3	2	23.4	21.81	21.85	21.96
		3	3	23.4	21.91	21.76	22.05
		6	0	22.4	20.7	20.92	20.91
	16QAM	1	0	22.4	21.56	21.6	21.74
		1	3	22.4	21.62	21.78	21.81
		1	5	22.4	21.72	21.61	21.68
		3	0	22.4	20.29	20.85	20.94
		3	2	22.4	20.34	20.76	20.9
		3	3	22.4	20.79	20.84	20.9
		6	0	21.4	19.94	19.67	20.23
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20415	20525	20635
3MHz	QPSK	1	0	23.4	21.92	22.05	22.72
		1	7	23.4	22.17	22.1	22.86
		1	14	23.4	21.96	22.6	22.15
		8	0	22.4	20.83	20.96	21.03
		8	4	22.4	20.78	20.92	21
		8	7	22.4	20.85	20.91	20.95
		15	0	22.4	20.93	20.88	21.11
	16QAM	1	0	22.4	20.68	20.86	20.78
		1	7	22.4	20.85	20.57	20.65
		1	14	22.4	20.84	20.46	20.94
		8	0	21.4	19.74	20.02	19.7
		8	4	21.4	19.84	19.74	19.94
		8	7	21.4	19.7	19.98	19.99
		15	0	21.4	19.86	20.1	20.04
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20425	20525	20625
5MHz	QPSK	1	0	23.4	21.9	22.09	21.59
		1	13	23.4	21.88	21.82	21.92

		1	24	<b>23.4</b>	22.15	21.51	21.94	
		12	0	<b>22.4</b>	20.83	20.89	20.93	
		12	6	<b>22.4</b>	20.85	20.78	20.99	
		12	13	<b>22.4</b>	20.86	20.81	20.97	
		25	0	<b>22.4</b>	20.93	20.87	21.03	
	16QAM	1	0	<b>22.4</b>	20.68	20.86	20.78	
		1	13	<b>22.4</b>	20.85	20.57	20.65	
		1	24	<b>22.4</b>	20.84	20.46	20.94	
		12	0	<b>21.4</b>	19.74	20.02	19.7	
		12	6	<b>21.4</b>	19.84	19.74	19.94	
		12	13	<b>21.4</b>	19.7	19.98	19.99	
		25	0	<b>21.4</b>	19.86	20.1	20.04	
	<b>Bandwidth</b>	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
						20450	20525	20600
<b>10MHz</b>	QPSK	1	0	<b>23.4</b>	22.08	22.15	22.12	
		1	25	<b>23.4</b>	22.03	22.11	22.03	
		1	49	<b>23.4</b>	22.02	21.95	<b>22.16</b>	
		25	0	<b>22.4</b>	20.98	21.01	20.95	
		25	13	<b>22.4</b>	<b>21.07</b>	20.84	20.86	
		25	25	<b>22.4</b>	20.93	20.84	20.94	
		50	0	<b>22.4</b>	20.9	20.88	20.88	
	16QAM	1	0	<b>22.4</b>	21.7	21.24	21.12	
		1	25	<b>22.4</b>	20.64	21.1	21.21	
		1	49	<b>22.4</b>	20.95	20.79	21	
		25	0	<b>21.4</b>	20.03	19.99	19.9	
		25	13	<b>21.4</b>	20.01	19.6	19.92	
		25	25	<b>21.4</b>	20.01	20.02	19.99	
		50	0	<b>21.4</b>	19.87	19.77	19.85	

### 8.1.9 CONDUCTED POWER MEASUREMENTS OF LTE Band 12

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23017	23095	23173
1.4MHz	QPSK	1	0	23.4	22.1	22.22	22.11
		1	3	23.4	22.08	22.64	22.12
		1	5	23.4	22.03	22.29	22.07
		3	0	23.4	21.97	21.98	22.01
		3	2	23.4	22.09	22.07	21.98
		3	3	23.4	21.98	22.05	21.98
		6	0	22.4	21.07	20.97	21.05
	16QAM	1	0	22.4	21.86	22.15	20.94
		1	3	22.4	22.02	22.06	21.34
		1	5	22.4	21.87	22.1	21.41
		3	0	22.4	20.55	20.79	20.76
		3	2	22.4	20.58	21.06	21.2
		3	3	22.4	20.46	20.81	21.21
		6	0	21.4	19.88	20.04	19.72
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23025	23095	23165
3MHz	QPSK	1	0	23.4	22.07	22.04	22.16
		1	7	23.4	22.25	22.14	22.01
		1	14	23.4	22.22	22.03	22.28
		8	0	22.4	20.97	20.96	21.08
		8	4	22.4	21.01	20.96	20.96
		8	7	22.4	20.99	20.98	20.95
		15	0	22.4	21	20.95	21.04
	16QAM	1	0	22.4	21.2	21.04	20.96
		1	7	22.4	20.95	21.07	21.31
		1	14	22.4	21.29	21.89	21.25
		8	0	21.4	20.22	19.84	20.39
		8	4	21.4	19.92	20.02	20.35
		8	7	21.4	19.94	20.12	20.04
		15	0	21.4	20.25	19.6	20.11
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23035	23095	23155
5MHz	QPSK	1	0	23.4	21.91	21.96	21.84
		1	13	23.4	22.08	21.79	21.97
		1	24	23.4	22.06	21.62	21.83

		12	0	<b>22.4</b>	21.05	20.99	20.99	
		12	6	<b>22.4</b>	21	21.07	21.04	
		12	13	<b>22.4</b>	20.99	20.94	21.1	
		25	0	<b>22.4</b>	21.07	20.97	20.98	
		16QAM	1	0	<b>22.4</b>	20.98	21.7	21.34
			1	13	<b>22.4</b>	20.74	21.65	20.78
			1	24	<b>22.4</b>	21.1	20.91	21.23
			12	0	<b>21.4</b>	20.13	20.21	20.03
	12		6	<b>21.4</b>	20.11	20.04	20.1	
	12	13	<b>21.4</b>	20.08	20.04	20.06		
	25	0	<b>21.4</b>	20.2	19.97	19.99		
	<b>Bandwidth</b>	<b>Modulation</b>	<b>RB size</b>	<b>RB offset</b>	<b>Tune-up</b>	<b>Low</b>	<b>Mid</b>	<b>High</b>
						23060	23095	23130
<b>10MHz</b>	QPSK	1	0	<b>23.4</b>	22.26	22.04	22.23	
		1	25	<b>23.4</b>	22.23	22.34	<b>22.39</b>	
		1	49	<b>23.4</b>	22.23	22.02	22.2	
		25	0	<b>22.4</b>	20.99	20.94	21	
		25	13	<b>22.4</b>	20.96	20.91	20.92	
		25	25	<b>22.4</b>	21.03	20.81	<b>21.12</b>	
		50	0	<b>22.4</b>	20.94	20.89	21.01	
	16QAM	1	0	<b>22.4</b>	21.38	21.19	21.14	
		1	25	<b>22.4</b>	21.6	21.77	21.03	
		1	49	<b>22.4</b>	21.85	21.07	21.16	
		25	0	<b>21.4</b>	20.12	20.22	20.11	
		25	13	<b>21.4</b>	20.09	20.23	20.04	
		25	25	<b>21.4</b>	20.02	19.97	20.11	
		50	0	<b>21.4</b>	19.9	20.06	19.94	

### 8.1.10 CONDUCTED POWER MEASUREMENTS OF LTE Band 17

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23755	23790	23825
5MHz	QPSK	1	0	<b>23.4</b>	22	22.2	22.07
		1	13	<b>23.4</b>	22.12	22.12	22.2
		1	24	<b>23.4</b>	22.19	22.08	22.09
		12	0	<b>22.4</b>	21.13	21.09	21.05
		12	6	<b>22.4</b>	21.1	21.09	21.08
		12	13	<b>22.4</b>	21.07	21.17	21.05
		25	0	<b>22.4</b>	21.15	21.14	21.17
	16QAM	1	0	<b>22.4</b>	21.12	21.29	20.97
		1	13	<b>22.4</b>	21.01	20.77	21.16
		1	24	<b>22.4</b>	21.11	21.14	21.19
		12	0	<b>21.4</b>	20.33	20.04	20.09
		12	6	<b>21.4</b>	20.33	20.22	20.38
		12	13	<b>21.4</b>	19.84	20.31	20.08
		25	0	<b>21.4</b>	20.17	20.28	20.05
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23780	23790	23800
10MHz	QPSK	1	0	<b>23.4</b>	22.55	22.44	<b>22.8</b>
		1	25	<b>23.4</b>	22.44	22.44	22.5
		1	49	<b>23.4</b>	22.39	22.42	22.55
		25	0	<b>22.4</b>	21.23	21.13	21.14
		25	13	<b>22.4</b>	21.13	21.16	21.16
		25	25	<b>22.4</b>	21.18	21.23	<b>21.25</b>
		50	0	<b>22.4</b>	21.22	21.23	21.14
	16QAM	1	0	<b>22.4</b>	21.84	21.37	21.39
		1	25	<b>22.4</b>	21.34	21.65	21.55
		1	49	<b>22.4</b>	22.04	21.45	21.48
		25	0	<b>21.4</b>	20.23	20.18	20.2
		25	13	<b>21.4</b>	20.25	20.21	20.24
		25	25	<b>21.4</b>	20.32	20.29	20.1
		50	0	<b>21.4</b>	20.17	20.09	20.09

### 8.1.11 CONDUCTED POWER MEASUREMENTS OF WiFi 2.4G

WiFi 2.4G	Frequency (MHz)	Tune-up	Average Power (dBm) for Data Rates (Mbps)							
			1	2	5.5	11	-	-	-	-
802.11b	2412	16.5	14.86	14.29	13.89	13.65	-	-	-	-
	2437	16.5	16.41	16.03	15.78	15.26	-	-	-	-
	2462	16.5	14.79	14.48	14.02	13.73	-	-	-	-

WiFi 2.4G	Frequency (MHz)	Tune-up	Average Power (dBm) for Data Rates (Mbps)							
			6	9	12	18	24	36	48	54
802.11g	2412	15.5	13.54	13.08	12.87	12.45	12.13	11.84	11.49	11.11
	2437	15.5	15.29	14.88	14.48	14.02	13.79	13.4	12.96	12.52
	2462	15.5	12.75	13.45	13.02	12.79	12.48	12.03	11.79	11.34

WiFi 2.4G	Frequency (MHz)	Tune-up	Average Power (dBm) for Data Rates (Mbps)							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n HT20	2412	14.3	12.37	12.13	11.97	11.63	11.27	10.97	10.46	10.02
	2437	14.3	14.13	13.88	13.55	13.08	12.59	12.12	11.72	11.44
	2462	14.3	12.74	12.59	12.19	11.88	11.46	10.99	10.57	10.32

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227, for WiFi 2.4GHz, the highest measured maximum output power Channel for DSSS modes(802.11b)was selected for SAR measurement.SAR for OFDM modes(2.4GHz 802.11g/n) was not required When the highest reported SAR for DSSS is adjusted by the ratio of OFDM modes(802.11g/n)to DSSS modes(802.11b)specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

### 8.1.12 CONDUCTED POWER MEASUREMENTS OF BT

BT	Average Conducted Power (dBm)			Tune Up
	CH0	CH39	CH78	
DH5	9.46	10.25	10.06	10.5
2DH5	9.46	10.2	10.01	10.5
3DH5	9.65	10.44	10.26	10.5

BT (4.0)	Average Conducted Power (dBm)			Tune Up
	CH0	CH19	CH39	
	0.81	0.85	0.23	2

Note:

- 1) The conducted power of BT is measured with RMS detector.

## 8.2 SAR TEST RESULTS

### General Notes:

- 1) Per KDB447498 D01v05r02, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01v05r02, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$  W/Kg; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45$  W/Kg, only one repeated measurement is required.
- 4) Per KDB941225 D06v02, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04v01r02, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is  $\leq 1.2$  W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is  $> 1.5$  W/kg, or  $> 7.0$  W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

### GSM Notes:

- 1) Per KDB648474 D04v01r02, body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- 2) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

### UMTS Notes:

Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

### LTE notes:

- 1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices v02r03. The general test procedures used for SAR testing can be found in Section 7.3.
- 2) A-MPR was disabled for all SAR test by setting NS\_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

**WLAN Notes:**

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated(peak)SAR is used as the initial test position. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHZ WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement.SAR for OFDM modes(2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.4 for more information.

## 8.2.1 SAR MEASUREMENT RESULT OF GSM850

### 1. Head SAR test results of GSM850

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Right Cheek	190	836.6	-0.02	33.5	32.99	0.623	<b>0.701</b>	1
GSM	Right Tilt	190	836.6	-0.05	33.5	32.99	0.496	0.558	2
GSM	Left Cheek	190	836.6	-0.02	33.5	32.99	0.540	0.607	3
GSM	Left Tilt	190	836.6	0.01	33.5	32.99	0.440	0.495	4
Test at worst position with SIM2									
GSM	Right Cheek	190	836.6	-0.01	33.5	32.99	0.615	0.692	5
Test at worst position with the battery 2#									
GSM	Right Cheek	190	836.6	0.07	33.5	32.99	0.518	0.583	6

### 2. Body-Worn SAR test results of GSM850

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Front	190	836.6	-0.07	33.5	32.99	0.559	0.629	1
GSM	Back	190	836.6	-0.06	33.5	32.99	0.663	<b>0.746</b>	2
Test at worst position with SIM2									
GSM	Back	190	836.6	-0.03	33.5	32.99	0.622	0.700	3
Test at worst position with the battery 2#									
GSM	Back	190	836.6	-0.03	33.5	32.99	0.546	0.614	4

### 3. Hotspot SAR test results of GSM850

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GPRS 2TX	Front	190	836.6	-0.07	33.5	32.71	1.100	1.319	1
GPRS 2TX	Front	128	824.2	-0.06	33.5	33.01	1.060	1.187	2
GPRS 2TX	Front	251	848.8	-0.03	33.5	33.03	0.931	1.037	3
GPRS 2TX	Back	190	836.6	-0.07	33.5	32.71	1.240	<b>1.487</b>	4
GPRS 2TX	Back	128	824.6	-0.08	33.5	33.01	1.140	1.276	5
GPRS 2TX	Back	251	848.8	-0.05	33.5	33.03	0.979	1.091	6
GPRS 2TX	Left	190	836.6	-0.03	33.5	32.71	0.383	0.459	7
GPRS 2TX	Right	190	836.6	0.08	33.5	32.71	0.482	0.578	8
GPRS 2TX	Bottom	190	836.6	-0.05	33.5	32.71	0.120	0.144	9
Test at worst position with SIM2									
GPRS 2TX	Back	190	836.6	-0.06	33.5	32.71	1.050	1.259	10
Test at worst position with the battery 2#10mm									
GPRS 2TX	Back	190	836.6	-0.08	33.5	32.71	1.160	1.391	11
Test at worst position with earphone									
GPRS 2TX	Front	190	836.6	-0.06	33.5	32.71	0.688	0.825	12
GPRS 2TX	Back	190	836.6	-0.06	33.5	32.71	0.649	0.778	13
1 <sup>st</sup> Repeat SAR Test at worst position(distance=10mm)									
GPRS 2TX	Front	190	836.6	-0.05	33.5	32.71	1.050	1.259	14
GPRS 2TX	Back	190	836.6	-0.07	33.5	32.71	1.210	1.451	15

- Note:1) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.  
 2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).  
 3) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

## 8.2.2 SAR MEASUREMENT RESULT OF GSM1900

### 1. Head SAR test results of GSM1900

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Right Cheek	661	1880	0.05	30.5	29.72	0.215	0.257	1
GSM	Right Tilt	661	1880	0.05	30.5	29.72	0.175	0.209	2
GSM	Left Cheek	661	1880	0.01	30.5	29.72	0.404	<b>0.483</b>	3
GSM	Left Tilt	661	1880	0.08	30.5	29.72	0.155	0.185	4
Test at worst position with SIM2									
GSM	Left Cheek	661	1880	0.02	30.5	29.72	0.398	0.476	5
Test at worst position with the battery 2#									
GSM	Left Cheek	661	1880	-0.02	30.5	29.72	0.301	0.360	6

### 2. Body-Worn SAR test results of GSM1900

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Front	661	1880	-0.07	30.5	29.72	0.212	0.254	1
GSM	Back	661	1880	0.02	30.5	29.72	0.240	<b>0.287</b>	2
Test at worst position with SIM2									
GSM	Back SIM2	661	1880	0.01	30.5	29.72	0.239	0.286	3
Test at worst position with the battery 2#									
GSM	Back	661	1880	0.05	30.5	29.72	0.237	0.284	4

### 3. Hotspot SAR test results of GSM1900

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GPRS 2TX	Front	661	1880	-0.03	30.5	29.46	0.530	0.673	1
GPRS 2TX	Back	661	1880	-0.06	30.5	29.46	0.910	1.156	2
GPRS 2TX	Back	512	1850.2	-0.03	30.5	29.56	1.010	1.254	3
GPRS 2TX	Back	810	1909.8	-0.04	30.5	29.52	0.812	1.018	4
GPRS 2TX	Left	661	1880	-0.04	30.5	29.46	0.201	0.255	5
GPRS 2TX	Right	661	1880	-0.02	30.5	29.46	0.206	0.262	6
GPRS 2TX	Bottom	661	1880	0.02	30.5	29.46	0.545	0.692	7
Test at worst position with SIM2									
GPRS 2TX	Back	512	1880	-0.05	30.5	29.56	0.898	1.115	8
Test at worst position with the battery 2#10mm									
GPRS 2TX	Back	512	1880	-0.03	30.5	29.56	0.955	1.186	9
Test at worst position with earphone									
GPRS 2TX	Back	512	1850.2	-0.08	30.5	29.56	1.030	<b>1.279</b>	10
1 <sup>st</sup> Repeat SAR Test at worst position(distance=10mm)									
GPRS 2TX	Back	512	1850.2	-0.01	30.5	29.56	0.998	1.239	11

- Note:1) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.  
 2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).  
 3) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

### 8.2.3 SAR MEASUREMENT RESULT OF UMTS Band 2

#### 1. Head SAR test results of UMTS Band 2

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Right Cheek	9400	1880	-0.18	24	23.43	0.517	0.590	1
RMC	Right Tilt	9400	1880	0.07	24	23.43	0.408	0.465	2
RMC	Left Cheek	9400	1880	0.07	24	23.43	0.961	1.096	3
RMC	Left Cheek	9262	1852.4	0.03	24	23.2	0.931	1.119	4
RMC	Left Cheek	9538	1907.6	0.02	24	23.22	0.984	<b>1.178</b>	5
RMC	Left Tilt	9400	1880	-0.01	24	23.43	0.377	0.430	6
Test at worst position with SIM2									
RMC	Left Cheek	9538	1907.6	0.05	24	23.22	0.623	0.746	7
Test at worst position with the battery 2#									
RMC	Left Cheek	9538	1907.6	-0.07	24	23.22	0.769	0.920	8
1 <sup>st</sup> Repeat SAR Test at worst position									
RMC	Left Cheek	9400	1880	0.06	24	23.43	0.872	0.994	9

- Note:1) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.  
 2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).  
 3) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

#### 2. Body-Worn SAR test results of UMTS Band 2

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	9400	1880	0.05	24	23.43	0.466	0.531	1
RMC	Back	9400	1880	0.07	24	23.43	0.496	<b>0.566</b>	2
Test at worst position with SIM2									
	Back SIM2	9400	1880	0.02	24	23.43	0.489	0.558	3
Test at worst position with the battery 2#15mm									
RMC	Back	9400	1880	-0.03	24	23.43	0.490	0.559	4

### 3. Hotspot SAR test results of UMTS Band 2

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	9400	1880	0.02	22.8	21.45	0.664	0.906	1
RMC	Front	9538	1907.6	0.09	22.8	21.2	0.513	0.742	2
RMC	Front	9262	1852.4	0.02	22.8	21.15	0.684	1.000	3
RMC	Back	9400	1880	0.02	22.8	21.45	0.715	0.976	2
RMC	Back	9538	1907.6	0.06	22.8	21.2	0.739	1.068	4
RMC	Back	9262	1852.4	0.09	22.8	21.15	0.745	<b>1.089</b>	5
RMC	Left	9400	1880	-0.04	22.8	21.45	0.112	0.153	6
RMC	Right	9400	1880	-0.04	22.8	21.45	0.088	0.120	7
RMC	Bottom	9400	1880	0.04	22.8	21.45	0.574	0.783	8
Test at worst position with SIM2									
RMC	Back	9262	1852.4	-0.06	22.8	21.15	0.535	0.782	9
Test at worst position with the battery 2#10mm									
RMC	Back	9262	1852.4	0.09	22.8	21.15	0.647	0.946	10

## 8.2.4 SAR MEASUREMENT RESULT OF UMTS Band 4

### 1. Head SAR test results of UMTS Band 4

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Right Cheek	1413	1732.6	-0.06	24	23.66	0.291	0.315	1
RMC	Right Tilt	1413	1732.6	-0.01	24	23.66	0.233	0.252	2
RMC	Left Cheek	1413	1732.6	0.02	24	23.66	0.535	<b>0.579</b>	3
RMC	Left Tilt	1413	1732.6	0.06	24	23.66	0.173	0.187	4
Test at worst position with SIM2									
RMC	Left Cheek	1413	1732.6	0.01	24	23.66	0.521	0.563	5
Test at worst position with the battery 2#									
RMC	Right Cheek	1413	1732.6	0.08	24	23.66	0.509	0.550	6

### 2. Body-Worn SAR test results of UMTS Band 4

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	1413	1732.6	0.09	24	23.66	0.458	0.495	1
RMC	Back	1413	1732.6	0.01	24	23.66	0.689	<b>0.745</b>	2
Test at worst position with SIM2									
RMC	Back	1413	1732.6	0.08	24	23.66	0.676	0.731	3
Test at worst position with the battery 2#15mm									
RMC	Back	1413	1732.6	0.05	24	23.66	0.658	0.712	4

### 3. Hotspot SAR test results of UMTS Band 4

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	1413	1732.6	0.01	18.8	17.81	0.109	0.137	1
RMC	Back	1413	1732.6	0.09	18.8	17.81	0.221	0.278	2
RMC	Left	1413	1732.6	0.01	18.8	17.81	0.041	0.051	3
RMC	Right	1413	1732.6	-0.09	18.8	17.81	0.00772	0.010	4
RMC	Bottom	1413	1732.6	-0.01	18.8	17.81	0.436	<b>0.548</b>	5
Test at worst position with SIM2									
RMC	Bottom	1413	1732.6	-0.05	18.8	17.81	0.417	0.524	6
Test at worst position with the battery 2#10mm									
RMC	Bottom	1413	1732.6	-0.01	18.8	17.81	0.409	0.514	7

### 8.2.5 SAR MEASUREMENT RESULT OF UMTS Band 5

#### 1. Head SAR test results of UMTS Band 5

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Right Cheek	4182	836.6	0.06	24	23.38	0.376	0.434	1
RMC	Right Tilt	4182	836.6	0.01	24	23.38	0.289	0.333	2
RMC	Left Cheek	4182	836.6	0.07	24	23.38	0.382	<b>0.441</b>	3
RMC	Left Tilt	4182	836.6	0.01	24	23.38	0.312	0.360	4
Test at worst position with SIM2									
RMC	Left Cheek	4182	836.6	0.05	24	23.38	0.361	0.416	5
Test at worst position with the battery 2#									
RMC	Left Cheek	4182	836.6	0.04	24	23.38	0.352	0.406	6

#### 2. Body-Worn SAR test results of UMTS Band 5

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	4182	836.6	0	24	23.38	0.183	0.211	1
RMC	Back	4182	836.6	0.01	24	23.38	0.273	0.315	2
Test at worst position with SIM2									
RMC	Back	4182	836.6	0.02	24	23.38	0.278	<b>0.321</b>	3
Test at worst position with the battery 2#15mm									
RMC	Back	4182	836.6	-0.04	24	23.38	0.268	0.309	4

### 3. Hotspot SAR test results of UMTS Band 5

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	4182	836.6	-0.03	24	23.38	0.234	0.270	1
RMC	Back	4182	836.6	-0.01	24	23.38	0.370	<b>0.427</b>	2
RMC	Left	4182	836.6	-0.04	24	23.38	0.250	0.288	3
RMC	Right	4182	836.6	0.04	24	23.38	0.308	0.355	4
RMC	Bottom	4182	836.6	-0.01	24	23.38	0.085	0.098	5
Test at worst position with SIM2									
RMC	Back	4182	836.6	0.03	24	23.38	0.287	0.331	6
Test at worst position with the battery 2#10mm									
RMC	Back	4182	836.6	0	24	23.38	0.297	0.343	7

## 8.2.6 SAR MEASUREMENT RESULT OF LTE Band 2

### 1. Head SAR test results of LTE Band 2

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/50#	Right Cheek	18900	1880	-0.06	23.4	22.32	0.161	0.206	1
	Right Tilt	18900	1880	0.01	23.4	22.32	0.170	0.218	2
	Left Cheek	18900	1880	-0.08	23.4	22.32	0.712	<b>0.913</b>	3
	Left Cheek	18700	1860	0.01	23.4	22.07	0.586	0.796	4
	Left Cheek	19100	1900	0.05	23.4	22.29	0.634	0.819	5
	Left Tilt	18900	1880	-0.06	23.4	22.32	0.308	0.395	6
20M 50%RB/ 0#	Right Cheek	18900	1880	0.03	22.4	20.96	0.135	0.188	7
	Right Tilt	18900	1880	0.04	22.4	20.96	0.130	0.181	8
	Left Cheek	18900	1880	-0.06	22.4	20.96	0.505	0.704	9
	Left Tilt	18900	1880	-0.03	22.4	20.96	0.241	0.336	10
20M 100%RB	Left Cheek	18900	1880	-0.01	22.4	20.93	0.381	0.534	11
Test at worst position with SIM2									
20M 1RB/50#	Left Cheek	18900	1880	0.01	23.4	22.32	0.596	0.764	12
Test at worst position with the battery 2#									
20M 1RB/50#	Left Cheek	18900	1880	-0.07	23.4	22.32	0.264	0.339	13

## 2. Body-Worn SAR test results of LTE Band 2

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/50#	Front	18900	1880	-0.08	23.4	22.32	0.147	0.189	1
	Back	18900	1880	-0.01	23.4	22.32	0.265	0.340	2
20M 50%RB/ 0#	Front	18900	1880	0.09	22.4	20.96	0.113	0.157	3
	Back	18900	1880	-0.03	22.4	20.96	0.224	0.312	4
Test at worst position with SIM2									
20M 1RB/50#	Back	18900	1880	0.01	22.4	20.96	0.274	0.382	5
Test at worst position with the battery 2#15mm									
20M 1RB/50#	Back	18900	1880	0.02	22.4	20.96	0.324	<b>0.451</b>	6

### 3. Hotspot SAR test results of LTE Band 2

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/50#	Front	18700	1860	0.07	21.3	20.68	0.231	0.266	1
	Back	18700	1860	0.07	21.3	20.68	0.622	<b>0.717</b>	2
	Left	18700	1860	0.07	21.3	20.68	0.112	0.129	3
	Right	18700	1860	0.01	21.3	20.68	0.063	0.073	4
	Bottom	18700	1860	-0.01	21.3	20.68	0.384	0.443	5
20M 50%RB/ 0#	Front	18700	1860	0.01	21.3	20.36	0.220	0.273	6
	Back	18700	1860	0.09	21.3	20.36	0.516	0.641	7
	Left	18700	1860	0.04	21.3	20.36	0.118	0.147	8
	Right	18700	1860	0.02	21.3	20.36	0.066	0.082	9
	Bottom	18700	1860	0.08	21.3	20.36	0.389	0.483	10
Test at worst position with SIM2									
20M 1RB/50#	Back	18700	1860	0.07	21.3	20.36	0.511	0.589	11
Test at worst position with the battery 2#10mm									
20M 1RB/50#	Back	18700	1860	0.05	21.3	20.36	0.543	0.626	12

### 8.2.7 SAR MEASUREMENT RESULT OF LTE Band 4

#### 1. Head SAR test results of LTE Band 4

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/50#	Right Cheek	20300	1745	-0.02	23.4	22.41	0.192	0.241	1
	Right Tilt	20300	1745	0.09	23.4	22.41	0.148	0.186	2
	Left Cheek	20300	1745	0.06	23.4	22.41	0.241	0.303	3
	Left Tilt	20300	1745	0.06	23.4	22.41	0.100	0.126	4
20M 50%RB/ 0#	Right Cheek	20050	1720	0.04	22.4	21.06	0.122	0.166	5
	Right Tilt	20050	1720	0.01	22.4	21.06	0.103	0.140	6
	Left Cheek	20050	1720	0.02	22.4	21.06	0.216	0.294	7
	Left Tilt	20050	1720	0.01	22.4	21.06	0.083	0.113	8
Test at worst position with SIM2									
20M 1RB/50#	Left Cheek	20300	1745	0.05	23.4	22.41	0.239	0.300	9
Test at worst position with the battery 2#									
20M 1RB/50#	Left Cheek	20300	1745	0.02	23.4	22.41	0.291	<b>0.366</b>	10

## 2. Body-Worn SAR test results of LTE Band 4

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/50#	Front	20300	1745	-0.04	23.4	22.41	0.629	0.790	1
	Back	20300	1745	0.05	23.4	22.41	0.632	0.794	2
20M 50%RB/ 0#	Front	20050	1720	-0.02	22.4	21.06	0.480	0.653	3
	Back	20050	1720	0.05	22.4	21.06	0.747	<b>1.017</b>	4
	Back	20300	1745	0.02	22.4	20.99	0.731	1.011	5
	Back	20175	1732.5	0.08	22.4	20.98	0.729	1.011	6
20M 100%RB	Back	20300	1745	0.02	22.4	20.99	0.391	0.541	7
Test at worst position with SIM2									
<b>20M 1RB/50#</b>	Back	18900	1880	0.01	22.4	21.06	0.581	0.791	8
Test at worst position with the battery 2#15mm									
<b>20M 1RB/50#</b>	Back	20050	1720	0.07	22.4	21.06	0.742	1.010	9

### 3. Hotspot SAR test results of LTE Band 4

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/50#	Front	20175	1732.5	0.05	19	17.8	0.335	0.442	1
	Back	20175	1732.5	0.07	19	17.8	0.650	0.857	2
	Back	20300	1745	-0.14	19	17.65	0.704	0.961	3
	Back	20050	1720	0.03	19	17.43	0.780	<b>1.120</b>	4
	Left	20175	1732.5	0.02	19	17.8	0.057	0.075	5
	Right	20175	1732.5	0.06	19	17.8	0.014	0.018	6
	Bottom	20175	1732.5	-0.06	19	17.8	0.495	0.653	7
20M 50%RB/ 0#	Front	20175	1732.5	0.06	19	17.6	0.334	0.461	8
	Back	20175	1732.5	0.05	19	17.6	0.694	0.958	9
	Back	20300	1745	0.09	19	17.6	0.640	0.883	10
	Back	20050	1720	0.06	19	17.44	0.733	1.050	11
	Left	20175	1732.5	0.02	19	17.6	0.059	0.081	12
	Right	20175	1732.5	0.07	19	17.6	0.0155	0.021	13
	Bottom	20175	1732.5	-0.02	19	17.6	0.611	0.843	14
	Bottom	20300	1745	0.01	19	17.6	0.556	0.767	15
20M 100%RB	Back	20300	1745	0.05	19	17.51	0.430	0.606	17
	Bottom	20300	1745	0.08	19	17.51	0.511	0.720	18
*Test at worst position with SIM2									
20M 1RB/50#	Back	20050	1720	0.07	19	17.21	0.524	0.752	19
Test at worst position with the battery 2#10mm									
20M 1RB/50#	Back	20050	1720	0.02	19	17.21	0.654	0.939	20

## 8.2.8 SAR MEASUREMENT RESULT OF LTE Band 5

### 1. Head SAR test results of LTE Band 5

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/49#	Right Cheek	20600	844	-0.08	23.4	22.16	0.169	<b>0.225</b>	1
	Right Tilt	20600	844	0.08	23.4	22.16	0.167	0.222	2
	Left Cheek	20600	844	-0.03	23.4	22.16	0.161	0.214	3
	Left Tilt	20600	844	-0.02	23.4	22.16	0.134	0.178	4
10M 50%RB/ 13#	Right Cheek	20450	829	-0.09	22.4	21.07	0.126	0.171	5
	Right Tilt	20450	829	-0.03	22.4	21.07	0.117	0.159	6
	Left Cheek	20450	829	0.02	22.4	21.07	0.128	0.174	7
	Left Tilt	20450	829	-0.03	22.4	21.07	0.110	0.149	8
Test at worst position with SIM2									
10M 1RB/49#	Right Cheek	20600	844	0.05	23.4	22.16	0.158	0.210	9
Test at worst position with the battery 2#									
10M 1RB/49#	Right Cheek	20600	844	-0.03	23.4	22.16	0.124	0.165	10

2. Body-Worn SAR test results of LTE Band 5

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/49#	Front	20600	844	0.02	23.4	22.16	0.134	0.178	1
	Back	20600	844	-0.05	23.4	22.16	0.174	0.231	2
10M 50%RB/ 13#	Front	20450	829	-0.03	22.4	21.07	0.290	<b>0.394</b>	3
	Back	20450	829	0.03	22.4	21.07	0.167	0.227	4
Test at worst position with SIM2									
10M 50%RB/ 13#	Front	20450	829	0.01	22.4	21.07	0.125	0.170	5
Test at worst position with the battery 2#15mm									
10M 50%RB/ 13#	Front	20450	829	0.03	22.4	21.07	0.135	0.183	6

### 3. Hotspot SAR test results of LTE Band 5

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/49#	Front	20600	844	-0.01	23.4	22.16	0.364	<b>0.484</b>	1
	Back	20600	844	-0.01	23.4	22.16	0.230	0.306	2
	Left	20600	844	0.02	23.4	22.16	0.165	0.220	3
	Right	20600	844	-0.09	23.4	22.16	0.210	0.279	4
	Bottom	20600	844	-0.04	23.4	22.16	0.164	0.218	5
10M 50%RB/ 13#	Front	20450	829	0.05	22.4	21.07	0.126	0.171	6
	Back	20450	829	0.07	22.4	21.07	0.199	0.270	7
	Left	20450	829	-0.06	22.4	21.07	0.117	0.159	8
	Right	20450	829	0.04	22.4	21.07	0.164	0.223	9
	Bottom	20450	829	0.09	22.4	21.07	0.069	0.094	10
Test at worst position with SIM2									
10M 1RB/49#	Back	20600	844	0	23.4	22.16	0.141	0.188	11
Test at worst position with the battery 2#10mm									
10M 1RB/49#	Back	20600	844	0.02	23.4	22.16	0.150	0.200	12

### 8.2.9 SAR MEASUREMENT RESULT OF LTE Band 12

#### 1. Head SAR test results of LTE Band 12

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/25#	Right Cheek	23130	711	0.07	23.4	22.39	0.103	0.130	1
	Right Tilt	23130	711	-0.08	23.4	22.39	0.087	0.110	2
	Left Cheek	23130	711	0.03	23.4	22.39	0.124	<b>0.156</b>	3
	Left Tilt	23130	711	0.09	23.4	22.39	0.096	0.121	4
10M 50%RB/ 25#	Right Cheek	23130	711	0.06	22.4	21.12	0.072	0.097	5
	Right Tilt	23130	711	0.01	22.4	21.12	0.060	0.081	6
	Left Cheek	23130	711	0.04	22.4	21.12	0.083	0.111	7
	Left Tilt	23130	711	0	22.4	21.12	0.080	0.107	8
Test at worst position with SIM2									
10M 1RB/25#	Left Cheek	23130	711	0.02	23.4	22.39	0.121	0.153	9
Test at worst position with the battery 2#									
10M 1RB/25#	Left Cheek	23130	711	0.03	22.4	22.39	0.079	0.079	10

2. Body-Worn SAR test results of LTE Band 12

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/25#	Front	23130	711	-0.04	23.4	22.39	0.093	0.117	1
	Back	23130	711	-0.06	23.4	22.39	0.128	0.162	2
10M 50%RB/ 25#	Front	23130	711	0.06	22.4	21.12	0.073	0.098	3
	Back	23130	711	-0.04	22.4	21.12	0.103	0.138	4
Test at worst position with SIM2									
10M 1RB/25#	Back	23130	711	-0.02	23.4	22.39	0.133	<b>0.168</b>	5
Test at worst position with the battery 2#15mm									
10M 1RB/25#	Back	23130	711	0.05	23.4	22.39	0.131	0.165	6

### 3. Hotspot SAR test results of LTE Band 12

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/25#	Front	23130	711	0.09	23.4	22.39	0.117	0.148	1
	Back	23130	711	-0.05	23.4	22.39	0.193	<b>0.244</b>	2
	Left	23130	711	0.05	23.4	22.39	0.093	0.117	3
	Right	23130	711	-0.08	23.4	22.39	0.101	0.127	4
	Bottom	23130	711	0.02	23.4	22.39	0.051	0.064	5
10M 50%RB/ 25#	Front	23130	711	0.05	22.4	21.12	0.089	0.120	6
	Back	23130	711	-0.01	22.4	21.12	0.146	0.196	7
	Left	23130	711	-0.02	22.4	21.12	0.056	0.075	8
	Right	23130	711	0.01	22.4	21.12	0.060	0.081	9
	Bottom	23130	711	-0.01	22.4	21.12	0.039	0.052	10
Test at worst position with SIM2									
10M 1RB/25#	Back	23130	711	0.02	23.4	22.39	0.19	0.240	11
Test at worst position with the battery 2#10mm									
10M 1RB/25#	Back	23130	711	-0.01	23.4	22.39	0.159	0.201	12

### 8.2.10 SAR MEASUREMENT RESULT OF LTE Band 17

#### 1. Head SAR test results of LTE Band 17

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/0#	Right Cheek	23800	711	0.07	23.4	22.8	0.091	0.104	1
	Right Tilt	23800	711	0.01	23.4	22.8	0.085	0.098	2
	Left Cheek	23800	711	-0.01	23.4	22.8	0.102	0.117	3
	Left Tilt	23800	711	-0.09	23.4	22.8	0.084	0.096	4
10M 50%RB/ 25#	Right Cheek	23800	711	0.08	22.4	21.25	0.081	0.106	5
	Right Tilt	23800	711	-0.03	22.4	21.25	0.068	0.089	6
	Left Cheek	23800	711	0.07	22.4	21.25	0.086	0.112	7
	Left Tilt	23800	711	-0.01	22.4	21.25	0.074	0.096	8
Test at worst position with SIM2									
10M 1RB/0#	Left Cheek	23800	711	0.02	23.4	22.8	0.095	0.109	9
Test at worst position with the battery 2#									
10M 1RB/0#	Left Cheek	23800	711	0.01	23.4	22.8	0.111	<b>0.127</b>	10

2. Body-Worn SAR test results of LTE Band 17

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/0#	Front	23800	711	0.05	23.4	22.8	0.100	0.115	1
	Back	23800	711	0.05	23.4	22.8	0.146	0.168	2
10M 50%RB/ 25#	Front	23800	711	-0.01	22.4	21.25	0.074	0.096	3
	Back	23800	711	0.09	22.4	21.25	0.109	0.142	4
Test at worst position with SIM2									
10M 1RB/0#	Back	23800	711	0.06	23.4	22.8	0.149	0.171	5
Test at worst position with the battery 2#15mm									
10M 1RB/0#	Back	23800	711	-0.04	23.4	22.8	0.150	<b>0.172</b>	6

### 3. Hotspot SAR test results of LTE Band 17

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/0#	Front	23800	711	0.03	23.4	22.8	0.117	0.134	1
	Back	23800	711	0.04	23.4	22.8	0.188	0.216	2
	Left	23800	711	0.02	23.4	22.8	0.072	0.083	3
	Right	23800	711	0	23.4	22.8	0.080	0.092	4
	Bottom	23800	711	0	23.4	22.8	0.041	0.047	5
10M 50%RB/ 25#	Front	23800	711	0	22.4	21.25	0.084	0.109	6
	Back	23800	711	0.03	22.4	21.25	0.137	0.179	7
	Left	23800	711	-0.04	22.4	21.25	0.070	0.091	8
	Right	23800	711	0.06	22.4	21.25	0.082	0.107	9
	Bottom	23800	711	0.08	22.4	21.25	0.031	0.040	10
Test at worst position with SIM2									
10M 1RB/0#	Back	23800	711	0.05	23.4	22.8	0.199	<b>0.228</b>	11
Test at worst position with the battery 2#10mm									
10M 1RB/25#	Back	23800	711	0.08	23.4	22.8	0.169	0.194	12

### 8.2.11 SAR MEASUREMENT RESULT OF WiFi 2.4G

#### 1. Head SAR test results of WiFi 2.4G

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
802.11b	Right Cheek	6	2437	0.08	16.5	16.41	0.267	0.273	1
	Right Tilt	6	2437	0.05	16.5	16.41	0.262	0.267	2
	Left Cheek	6	2437	-0.08	16.5	16.41	0.756	0.772	3
	Left Tilt	6	2437	0.01	16.5	16.41	0.745	0.761	4
Test at worst position with the battery 2#									
802.11b	Left Cheek	6	2437	0.08	16.5	16.41	0.761	<b>0.777</b>	5

## 2. Body-Worn SAR test results of WiFi 2.4G

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
802.11b	Front	6	2437	-0.01	16.5	16.41	0.0704	0.072	1
	Back	6	2437	0.02	16.5	16.41	0.0592	0.060	2
Test at worst position with the battery 2#15mm									
802.11b	Front	6	2437	0.05	16.5	16.41	0.0705	<b>0.072</b>	3

## 3. Hotspot SAR test results of WiFi 2.4G


Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
802.11b	Front	6	2437	0.09	16.5	16.41	0.127	0.130	1
	Back	6	2437	0.08	16.5	16.41	0.119	0.121	2
	Left	6	2437	0.07	16.5	16.41	0.013	0.013	3
	Right	6	2437	0.01	16.5	16.41	0.230	<b>0.235</b>	4
	Top	6	2437	0.05	16.5	16.41	0.055	0.056	5
Test at worst position with the battery 2#10mm									
802.11b	Right	6	2437	-0.01	16.5	16.41	0.187	0.191	6

Note: Per KDB248227D01, the highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

### 8.3 MULTIPLE TRANSMITTER EVALUATION

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05r02.

The location of the antennas inside mobile phone is shown as below picture:

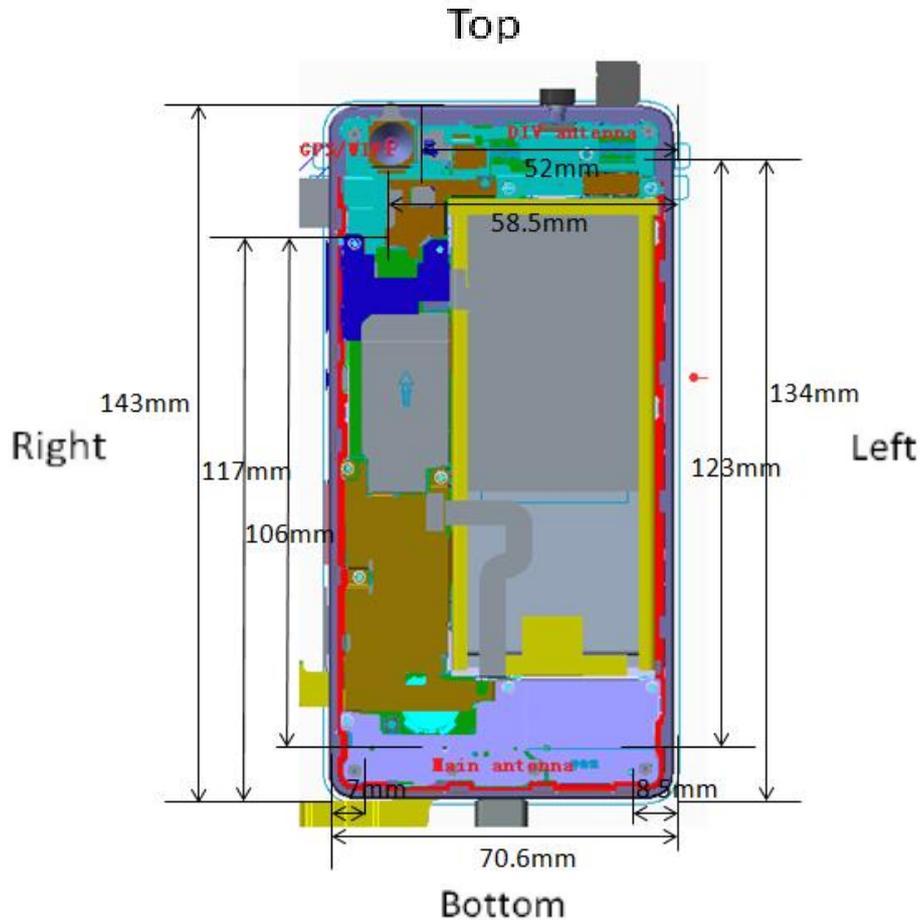

Note:

1) Diversity antenna is used to improve the acceptance of performance of the main antenna, it does not have a transmitter function.

#### Sides for SAR testing

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
GSM850/1900	Hotspot	YES	YES	YES	YES	NO	YES
UMTS Band 2/4/5	Hotspot	YES	YES	YES	YES	NO	YES
LTE Band 2/4/5/12/17	Hotspot	YES	YES	YES	YES	NO	YES
WiFi	Hotspot	YES	YES	NO	YES	YES	NO

Note: Per KDB 941225 D06, particular DUT edges were not required to be evaluated for Hotspot SAR if the antenna-to-edge distance is greater than 2.5cm.

### 8.3.1 STAND-ALONE SAR TEST EXCLUSION

Per FCC KDB 447498D01v05, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

Standalone SAR test exclusion for BT

Mode	Position	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body-Worn	10.5	11.22	15	2.48	1.18	3	Yes

Note:

- 1)\* - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth for this device.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50$  mm, where  $x = 7.5$  for 1-g SAR and  $x = 18.75$  for 10-g SAR.

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion

According to KDB 447498 D01, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of  $\leq 0.4 \text{ W/Kg}$  to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \frac{\sqrt{f_{(\text{GHz})}}}{7.5}$$

If the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is used for estimated SAR calculation. When the separation distance is  $> 50$  mm, the  $0.4 \text{ W/Kg}$  is used for SAR<sub>1g</sub>

Estimated SAR calculation

Mode	Position	$P_{max}$ (dBm)*	$P_{max}$ (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/Kg)*
BT	Body- Worn	10.5	11.22	15	2.48	7.5	0.157
GSM8 50/19 00	Top Side			> 50			0.4
UMTS Band 2/4/5	Top Side			> 50			0.4
LTE Band 2/4/5/ 12/17	Top Side			> 50			0.4
WiFi	Bottom Side			> 50			0.4

Note: \* - maximum possible output power declared by manufacturer

### 8.3.2 SIMULTANEOUS TRANSMISSION CONDITIONS

Per FCC KDB 447498D01v05 r02, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Head	Body-worn	Hotspot
1	GSM (Voice) + WiFi 2.4G	Yes	Yes	N/A
2	GPRS/EDGE (DATA) + WiFi 2.4G	N/A	N/A	Yes
3	GSM(Voice) +BT	N/A	Yes	N/A
4	GPRS/EDGE(DATA)+BT	N/A	N/A	N/A
5	UMTS(Voice)+WiFi 2.4G	Yes	Yes	N/A
6	UMTS(DATA)+WiFi 2.4G	N/A	Yes	Yes
7	UMTS(Voice)+BT	N/A	Yes	N/A
8	UMTS(DATA)+BT	N/A	Yes	N/A
9	LTE(DATA)+WiFi 2.4G	Yes*	Yes*	Yes
10	LTE(DATA)+BT	N/A	Yes*	N/A

Note:

- i)\* VOIP 3rd party applications may possibly be installed and used by the end user.
- ii) Wi-Fi 2.4G and Bluetooth share the same antenna and can't transmit simultaneously.
- iii) 2G&3G&4G share the same antenna and can't transmit simultaneously.
- iv) The device does not support DTM function.
- v) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

### 8.3.3 SAR SUMMATION SCENARIO

Simultaneous TX Combination of GSM850 and WiFi.

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		GSM850	WiFi			
Head	Right Cheek	0.701	0.273	0.974	N/A	N/A
	Right Tilt	0.558	0.267	0.825	N/A	N/A
	Left Cheek	0.607	0.777	1.384	N/A	N/A
	Left Tilt	0.495	0.761	1.256	N/A	N/A
Body-Worn	Front	0.629	0.072	0.701	N/A	N/A
	Back	0.746	0.060	0.806	N/A	N/A
Hotspot	Front	1.319	0.130	1.449	N/A	N/A
	Back	1.487	0.121	1.608	0.028	See 8.3.4
	Left	0.459	0.013	0.472	N/A	N/A
	Right	0.578	0.235	0.813	N/A	N/A
	Top	0.4	0.056	0.056	N/A	N/A
	Bottom	0.144	0.4	0.544	N/A	N/A

Simultaneous TX Combination of GSM1900 and WiFi.

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		GSM1900	WiFi			
Head	Right Cheek	0.257	0.273	0.530	N/A	N/A
	Right Tilt	0.209	0.267	0.476	N/A	N/A
	Left Cheek	0.483	0.777	1.260	N/A	N/A
	Left Tilt	0.185	0.761	0.946	N/A	N/A
Body-Worn	Front	0.254	0.072	0.326	N/A	N/A
	Back	0.287	0.060	0.347	N/A	N/A
Hotspot	Front	0.673	0.130	0.803	N/A	N/A
	Back	1.279	0.121	1.400	N/A	N/A
	Left	0.255	0.013	0.268	N/A	N/A
	Right	0.262	0.235	0.497	N/A	N/A
	Top	0.4	0.056	0.456	N/A	N/A
	Bottom	0.692	0.4	1.092	N/A	N/A

Simultaneous TX Combination of UMTS Band 2 and WiFi.

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		UMTS Band 2	WiFi			
Head	Right Cheek	0.590	0.273	0.863	N/A	N/A
	Right Tilt	0.465	0.267	0.732	N/A	N/A
	Left Cheek	1.178	0.777	1.955	0.022	See 8.3.4
	Left Tilt	0.430	0.761	1.191	N/A	N/A
Body-Worn	Front	0.531	0.072	0.603	N/A	N/A
	Back	0.566	0.060	0.626	N/A	N/A
Hotspot	Front	1.000	0.130	1.130	N/A	N/A
	Back	1.089	0.121	1.210	N/A	N/A
	Left	0.153	0.013	0.166	N/A	N/A
	Right	0.120	0.235	0.355	N/A	N/A
	Top	0.4	0.056	0.456	N/A	N/A
	Bottom	0.783	0.4	1.183	N/A	N/A

Simultaneous TX Combination of UMTS Band 4 and WiFi.

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		UMTS Band 4	WiFi			
Head	Right Cheek	0.315	0.273	0.588	N/A	N/A
	Right Tilt	0.252	0.267	0.519	N/A	N/A
	Left Cheek	0.579	0.777	1.356	N/A	N/A
	Left Tilt	0.187	0.761	0.948	N/A	N/A
Body-Worn	Front	0.495	0.072	0.567	N/A	N/A
	Back	0.745	0.060	0.805	N/A	N/A
Hotspot	Front	0.137	0.130	0.267	N/A	N/A
	Back	0.278	0.121	0.399	N/A	N/A
	Left	0.051	0.013	0.064	N/A	N/A
	Right	0.010	0.235	0.245	N/A	N/A
	Top	0.4	0.056	0.456	N/A	N/A
	Bottom	0.548	0.4	0.948	N/A	N/A

Simultaneous TX Combination of UMTS Band 5 and WiFi.

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		UMTS Band 5	WiFi			
Head	Right Cheek	0.434	<b>0.273</b>	0.707	N/A	N/A
	Right Tilt	0.333	0.267	0.600	N/A	N/A
	Left Cheek	0.441	0.777	1.218	N/A	N/A
	Left Tilt	0.360	0.761	1.121	N/A	N/A
Body-Worn	Front	0.183	0.072	0.255	N/A	N/A
	Back	0.321	0.060	0.381	N/A	N/A
Hotspot	Front	0.270	0.130	0.400	N/A	N/A
	Back	0.427	0.121	0.548	N/A	N/A
	Left	0.288	0.013	0.301	N/A	N/A
	Right	0.355	0.235	0.590	N/A	N/A
	Top	0.4	0.056	0.456	N/A	N/A
	Bottom	0.098	0.4	0.498	N/A	N/A

Simultaneous TX Combination of LTE Band 2 and WiFi.

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		LTE Band 2	WiFi			
Head	Right Cheek	0.206	0.273	0.479	N/A	N/A
	Right Tilt	0.218	0.267	0.485	N/A	N/A
	Left Cheek	0.913	0.777	<b>1.690</b>	0.019	See 8.3.4
	Left Tilt	0.395	0.761	1.156	N/A	N/A
Body-Worn	Front	0.189	0.072	0.261	N/A	N/A
	Back	0.451	0.060	0.511	N/A	N/A
Hotspot	Front	0.273	0.130	0.403	N/A	N/A
	Back	0.717	0.121	0.838	N/A	N/A
	Left	0.147	0.013	0.160	N/A	N/A
	Right	0.082	0.235	0.317	N/A	N/A
	Top	0.4	0.056	0.456	N/A	N/A
	Bottom	0.483	0.4	0.883	N/A	N/A

Simultaneous TX Combination of LTE Band 4 and WiFi.

Test Position		Scaled SARMax		$\Sigma$ SAR	SPLSR	Remark
		LTE Band 4	WiFi			
Head	Right Cheek	0.241	0.273	0.514	N/A	N/A
	Right Tilt	0.186	0.267	0.453	N/A	N/A
	Left Cheek	0.366	0.777	1.143	N/A	N/A
	Left Tilt	0.126	0.761	0.887	N/A	N/A
Body-Worn	Front	0.790	0.072	0.862	N/A	N/A
	Back	1.017	0.060	1.077	N/A	N/A
Hotspot	Front	0.461	0.130	0.591	N/A	N/A
	Back	1.120	0.121	<b>1.241</b>	N/A	N/A
	Left	0.081	0.013	0.094	N/A	N/A
	Right	0.021	0.235	0.256	N/A	N/A
	Top	0.4	0.056	0.456	N/A	N/A
	Bottom	0.961	0.4	1.361	N/A	N/A

Simultaneous TX Combination of LTE Band 5 and WiFi.

Test Position		Scaled SARMax		$\Sigma$ SAR	SPLSR	Remark
		LTE Band 5	WiFi			
Head	Right Cheek	0.225	0.273	0.498	N/A	N/A
	Right Tilt	0.222	0.267	0.489	N/A	N/A
	Left Cheek	0.214	0.777	0.991	N/A	N/A
	Left Tilt	0.178	0.761	0.939	N/A	N/A
Body-Worn	Front	0.394	0.072	0.466	N/A	N/A
	Back	0.231	0.060	0.291	N/A	N/A
Hotspot	Front	0.484	0.130	0.614	N/A	N/A
	Back	0.306	0.121	0.427	N/A	N/A
	Left	0.220	0.013	0.233	N/A	N/A
	Right	0.279	0.235	0.514	N/A	N/A
	Top	0.4	0.056	0.456	N/A	N/A
	Bottom	0.218	0.4	0.618	N/A	N/A

Simultaneous TX Combination of LTE Band 12 and WiFi.

Test Position		Scaled SARMax		ΣSAR	SPLSR	Remark
		LTE Band 12	WiFi			
Head	Right Cheek	0.130	0.273	0.403	N/A	N/A
	Right Tilt	0.110	0.267	0.377	N/A	N/A
	Left Cheek	0.156	0.777	0.933	N/A	N/A
	Left Tilt	0.121	0.761	0.882	N/A	N/A
Body-Worn	Front	0.117	0.072	0.189	N/A	N/A
	Back	0.168	0.060	0.228	N/A	N/A
Hotspot	Front	0.148	0.130	0.278	N/A	N/A
	Back	0.244	0.121	0.365	N/A	N/A
	Left	0.117	0.013	0.130	N/A	N/A
	Right	0.127	0.235	0.362	N/A	N/A
	Top	0.4	0.056	0.456	N/A	N/A
	Bottom	0.064	0.4	0.464	N/A	N/A

Simultaneous TX Combination of LTE Band 17 and WiFi.

Test Position		Scaled SARMax		ΣSAR	SPLSR	Remark
		LTE Band 17	WiFi			
Head	Right Cheek	0.106	0.273	0.379	N/A	N/A
	Right Tilt	0.098	0.267	0.365	N/A	N/A
	Left Cheek	0.127	0.777	0.904	N/A	N/A
	Left Tilt	0.096	0.761	0.857	N/A	N/A
Body-Worn	Front	0.115	0.072	0.187	N/A	N/A
	Back	0.172	0.060	0.232	N/A	N/A
Hotspot	Front	0.134	0.130	0.264	N/A	N/A
	Back	0.228	0.121	0.349	N/A	N/A
	Left	0.091	0.013	0.104	N/A	N/A
	Right	0.107	0.235	0.342	N/A	N/A
	Top	0.4	0.056	0.456	N/A	N/A
	Bottom	0.047	0.4	0.447	N/A	N/A

Simultaneous TX Combination of GSM850 and BT

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		GSM850	BT			
Body-Worn	Front	0.629	0.157	0.786	N/A	N/A
	Back	0.746	0.157	0.903	N/A	N/A

Simultaneous TX Combination of GSM1900 and BT

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		GSM1900	BT			
Body-Worn	Front	0.254	0.157	0.326	/A	N/A
	Back	0.287	0.157	0.347	N/A	N/A

Simultaneous TX Combination of UMTS Band 2 and BT

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		UMTS Band 2	BT			
Body-Worn	Front	0.466	0.157	0.623	N/A	N/A
	Back	0.496	0.157	0.653	N/A	N/A

Simultaneous TX Combination of UMTS Band 4 and BT

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		UMTS Band 4	BT			
Body-Worn	Front	0.495	0.157	0.652	N/A	N/A
	Back	0.745	0.157	0.902	N/A	N/A

Simultaneous TX Combination of UMTS Band 5 and BT

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		UMTS Band 5	BT			
Body-Worn	Front	0.183	0.157	0.340	N/A	N/A
	Back	0.321	0.157	0.478	N/A	N/A

Simultaneous TX Combination of LTE Band 2 and BT

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		LTE Band VII	BT			
Body-Worn	Front	0.189	0.157	0.346	N/A	N/A
	Back	0.451	0.157	0.608	N/A	N/A

Simultaneous TX Combination of LTE Band 4 and BT

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		LTE Band 4	BT			
Body-Worn	Front	0.790	0.157	0.947	N/A	N/A
	Back	1.017	0.157	1.174	N/A	N/A

Simultaneous TX Combination of LTE Band 5 and BT

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		LTE Band 5	BT			
Body-Worn	Front	0.394	0.157	0.551	N/A	N/A
	Back	0.231	0.157	0.388	N/A	N/A

Simultaneous TX Combination of LTE Band 12 and BT

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		LTE Band 12	BT			
Body-Worn	Front	0.117	0.157	0.274	N/A	N/A
	Back	0.168	0.157	0.325	N/A	N/A

Simultaneous TX Combination of LTE Band 17 and BT

Test Position		Scaled SAR <sub>Max</sub>		ΣSAR	SPLSR	Remark
		LTE Band 17	BT			
Body-Worn	Front	0.115	0.157	0.272	N/A	N/A
	Back	0.172	0.157	0.329	N/A	N/A

### 8.3.4 SIMULTANEOUS TRANSMISSION CONCLUSION

According to KDB447498 D01v05, When the sum of SAR is larger than limit, SAR test exclusion is determined by the SAR to peak location separation ratio(SPLSR).When the SAR to peak location ratio for each pair of antennas is  $\leq 0.04$ , simultaneous SAR evaluation is not required.

When SAR is measured for both antennas in the pair the peak location separation distance is computed by the following fomula:


$$\text{Distance}_{\text{Tx1-Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = (\text{SAR}_1 + \text{SAR}_2)^{1.5}/R_i$$

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location should be translated onto the test device to determine the peak location separation for the antenna pair. The ERP location on the phantom is aligned with the ERP location on the handset, with 6mm separation in the z coordinate due to the ear spacer. A measured peak location can be translated onto the handset, with respect to the ERP location, by ignoring the 6 mm offset in the z coordinate. The assumed peak location of the antenna with estimated SAR can also be determined with respect to the ERP location on the handset. The peak location separation distance is estimated by the x and y coordinated of the peaks, referenced to the ERP location. While flat phantoms are not expected to have these issues, the same peak translation approach should be applied to determine peak location separation.

1) The sum of aggregate 1g SAR was above 1.6 W/Kg for Hotspot back configuration with GSM850 and WiFi 2.4G.

The Peak SAR location is as below:

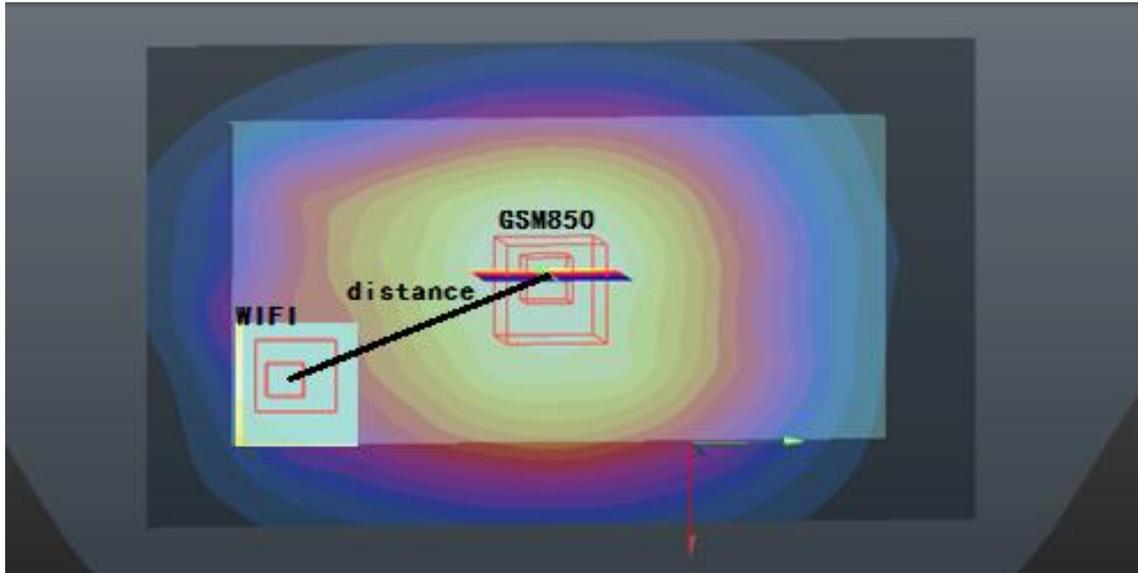


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
GSM850	1.45	-0.02	-0.0045	-0.207
WiFi	0.19	0	-0.058	-0.204

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Back	1.487	0.121	57.19	0.028	0.04	Not Required

- 2) The sum of aggregate 1g SAR was above 1.6 W/Kg for Left head touched cheek configuration with UMTS Band 2 and WiFi 2.4G.  
The Peak SAR location is as below:

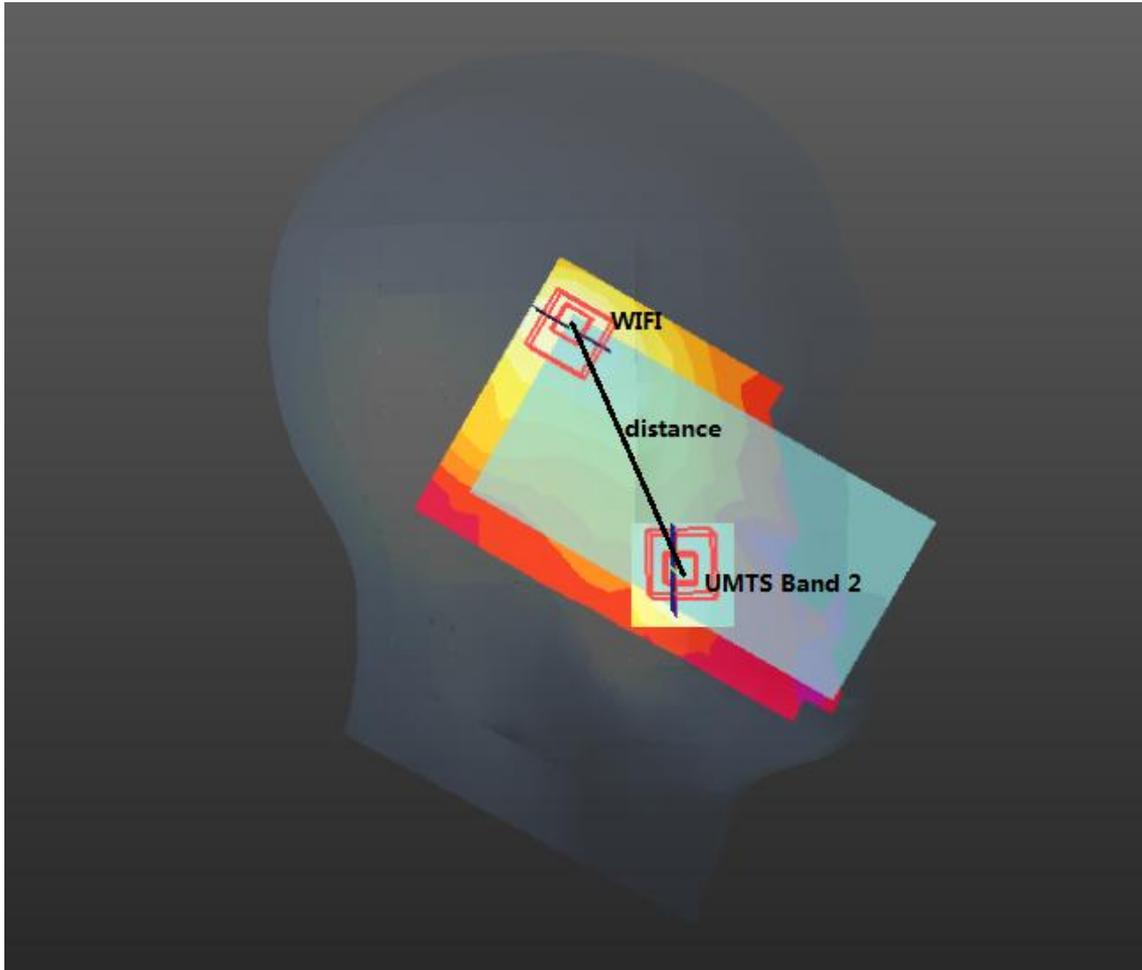


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
UMTS Band 2	1.27	0.0574	0.255	-0.172
WiFi	1.07	0.0266	0.337	-0.171

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.178	0.777	87.60	0.022	0.04	Not Required

- 3) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head touched cheek configuration with LTE Band 2 and WiFi 2.4G.  
The Peak SAR location is as below:

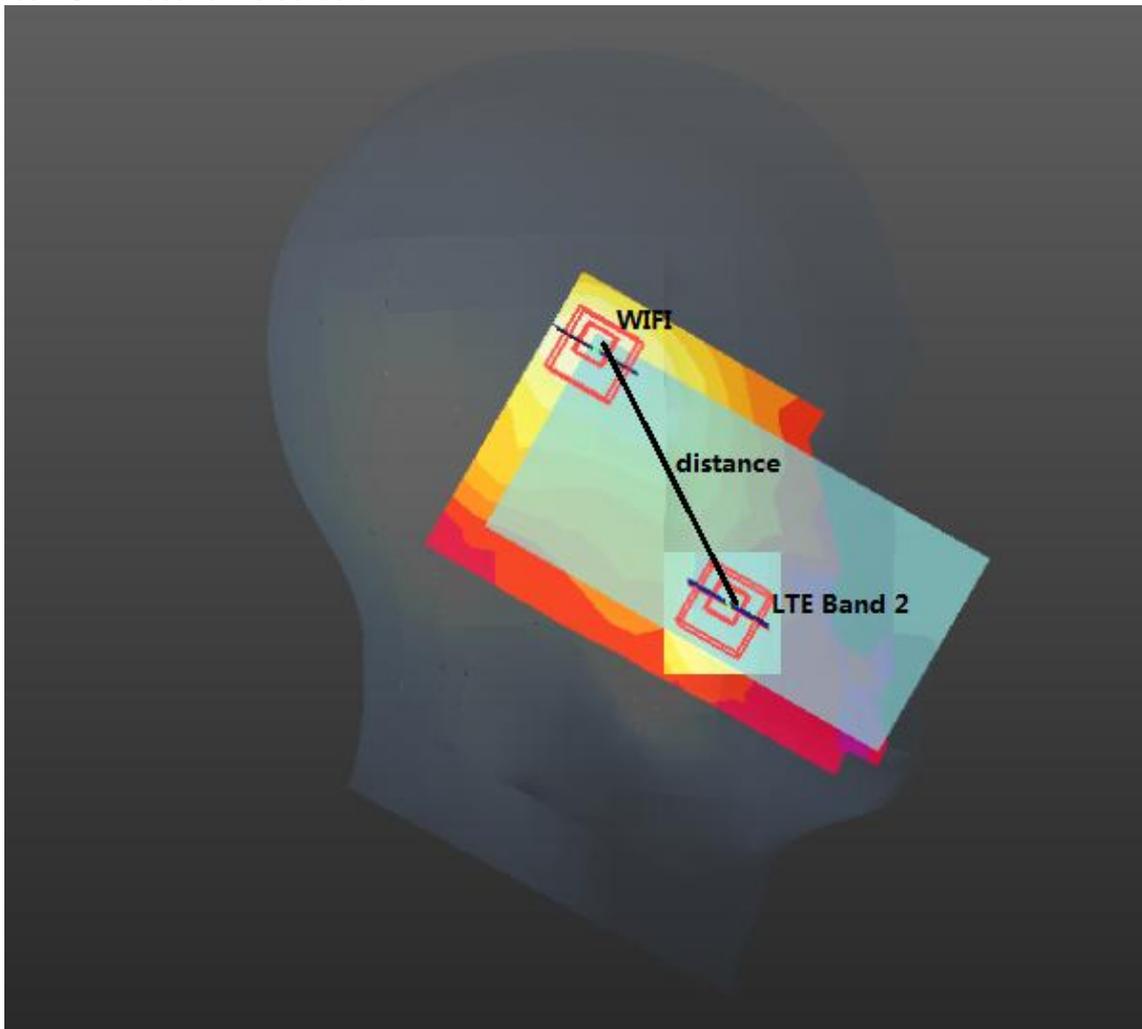

Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
LTE Band 2	1.00	0.0595	0.255	-0.171
WiFi	1.07	0.0266	0.337	-0.171

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	0.913	0.777	88.35	0.019	0.04	Not Required

The above numeral summed SAR results and SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v05r02.

## APPENDIX

### 1. Test Layout

#### Specific Absorption Rate Test Layout



**Liquid depth in the flat Phantom ( $\geq 15$ cm depth)**

Body 835MHz 15.5cm




Head 835MHz 15.5cm




Body 750MHz 15.4cm



Head 750MHz 15.3cm

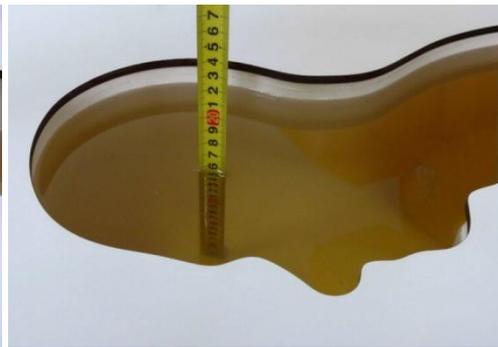


Body 1750MHz 15.3cm

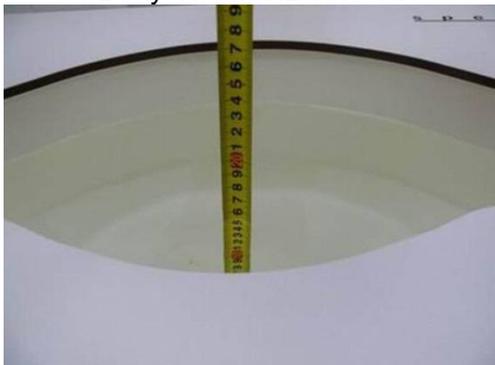

Head 1750MHz 15.3cm




Body 1900 MHz 15.1cm

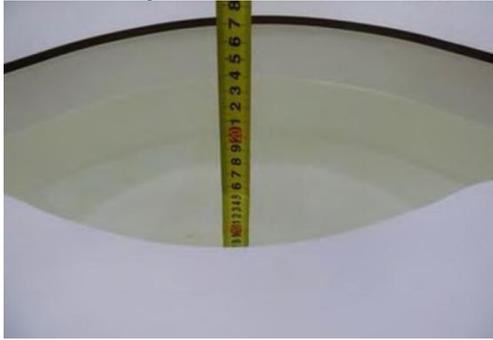

Head 1900M Hz 15.4cm



Body 2450 MHz 15.4cm

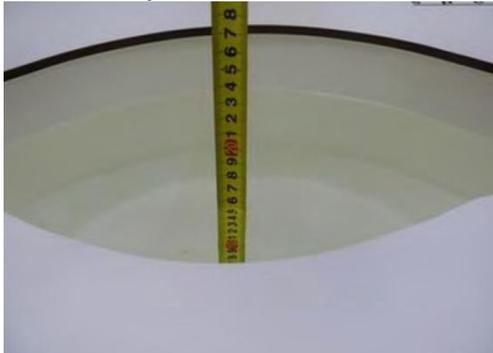

Head 2450MHz 15.3cm



**2. System Check Plots**

(Pls See Appendix A.)

**3.SAR Measurement Plots**

(Pls See Appendix B.)

**4. Calibration Certificate**

(Pls See Appendix C.)

## 5. EUT Testing Position and Antenna Location


Test Position Left hand tilted



Test Position Left hand touch cheek



Test Position Right hand tilted

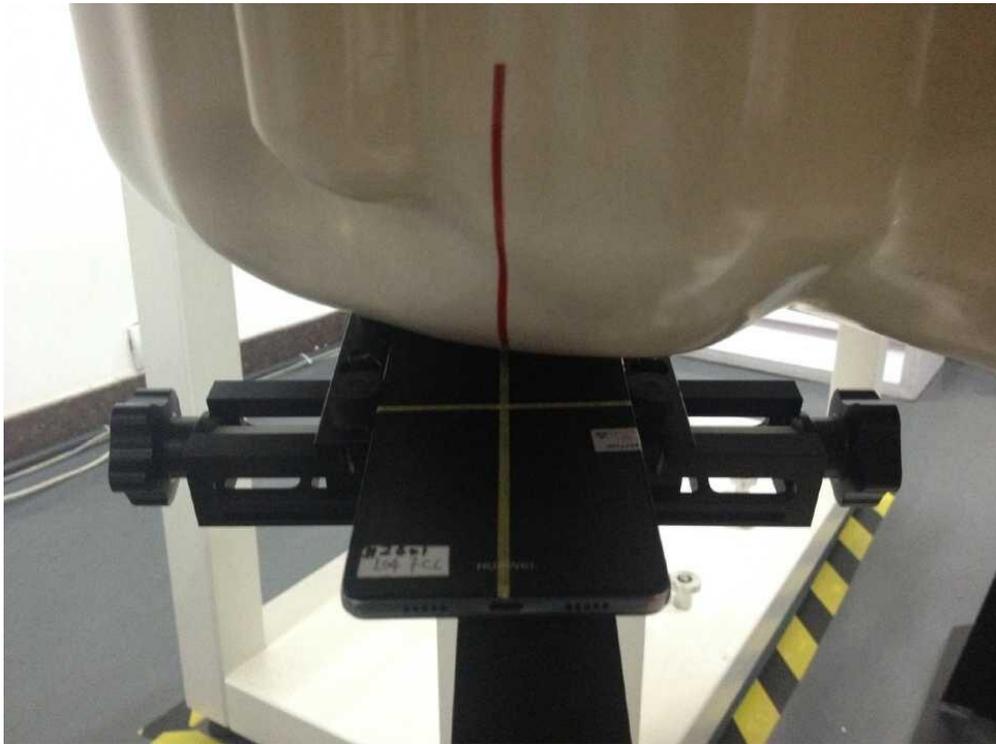

Test Position Right hand touch cheek



Test Position Back 15mm



Test Position Front 15mm



Test Position Front 10mm



Test Position Back 10mm




Test Position Front 10mm



Test Position Left 10mm



Test Position Right 10mm

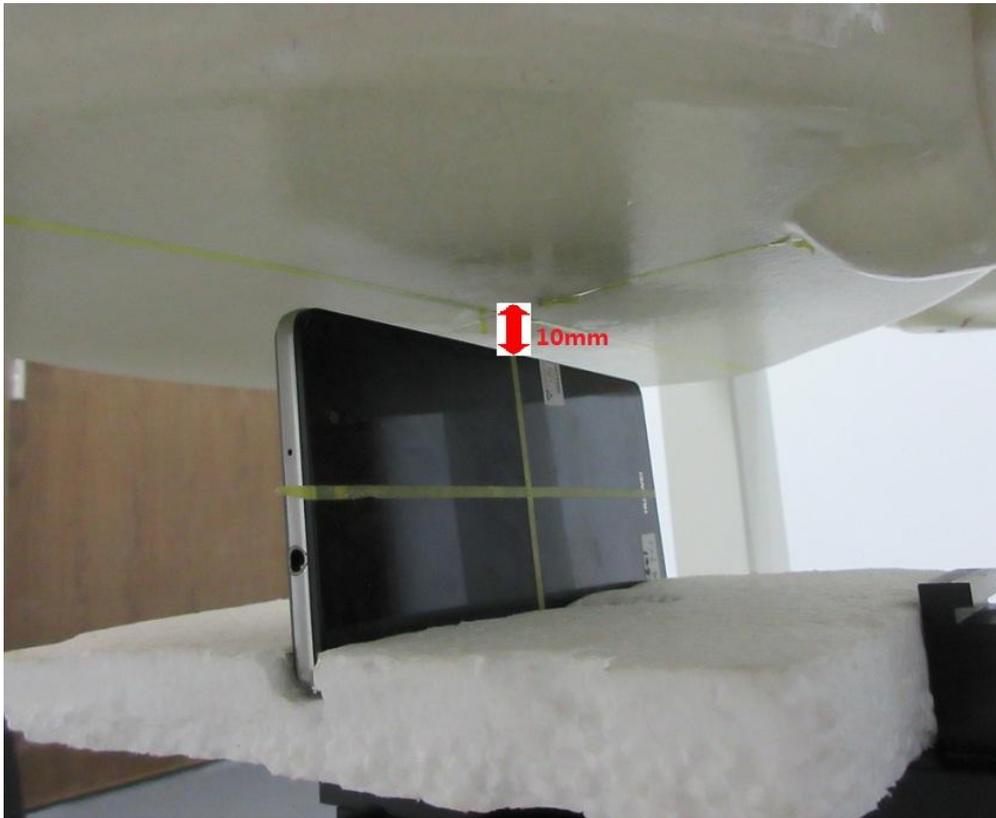

Test Position Top 10mm

