



TX CH 157

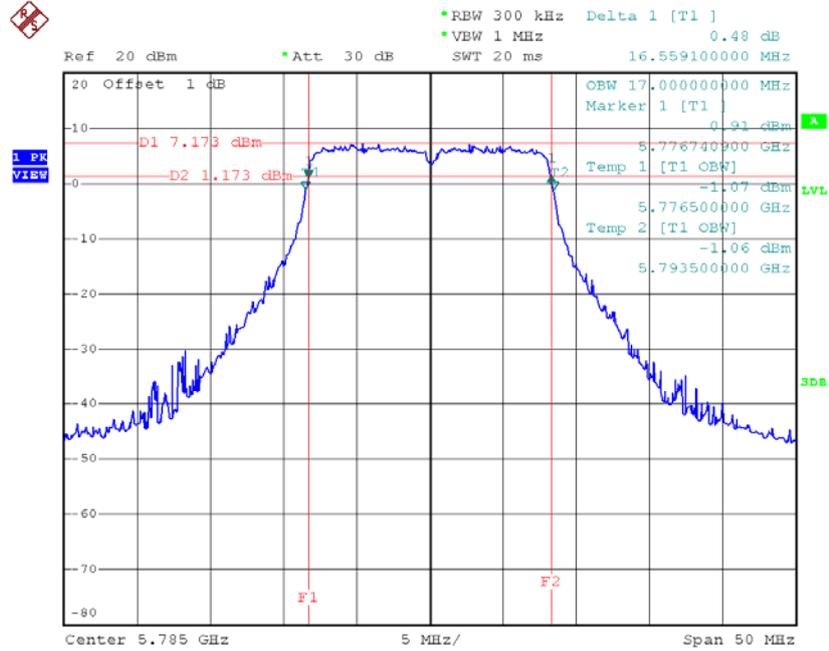

Date: 23.JUL.2015 12:14:57

TX CH 165

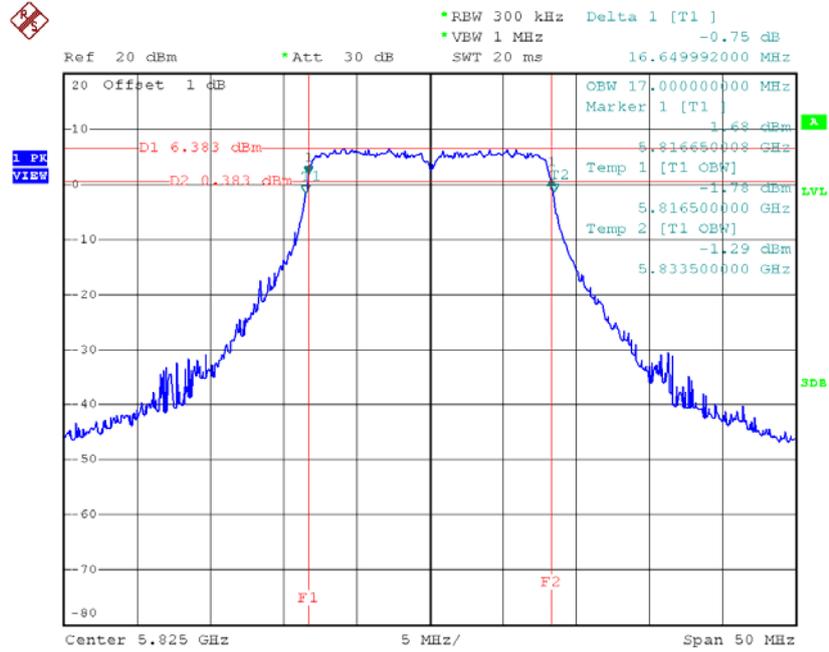


Date: 23.JUL.2015 12:16:58

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.85	18.10	>=500
CH157	5785	17.85	18.10	>=500
CH165	5825	17.85	18.00	>=500

TX CH 149

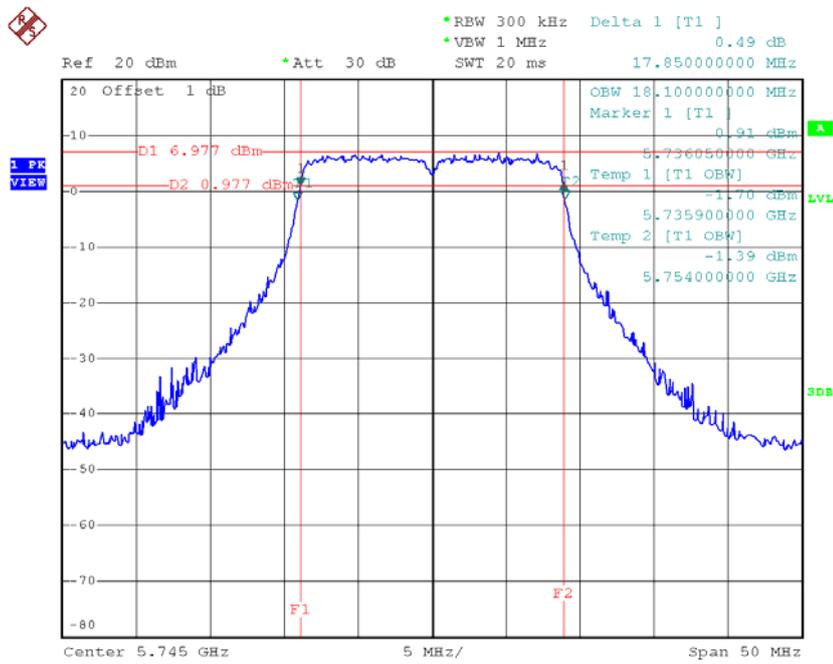


Date: 23.JUL.2015 14:07:22

TX CH 157

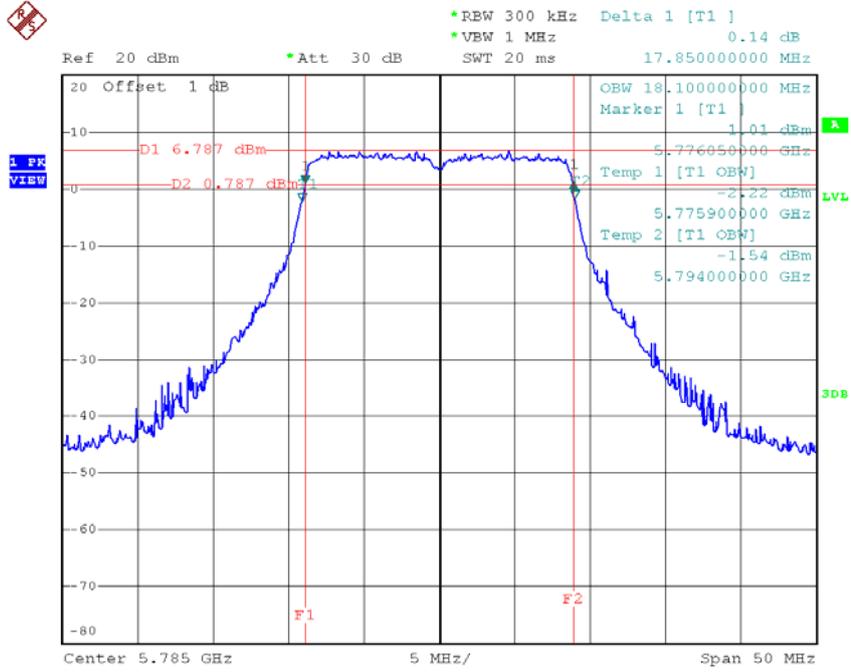

Date: 23.JUL.2015 14:08:24

TX CH 165

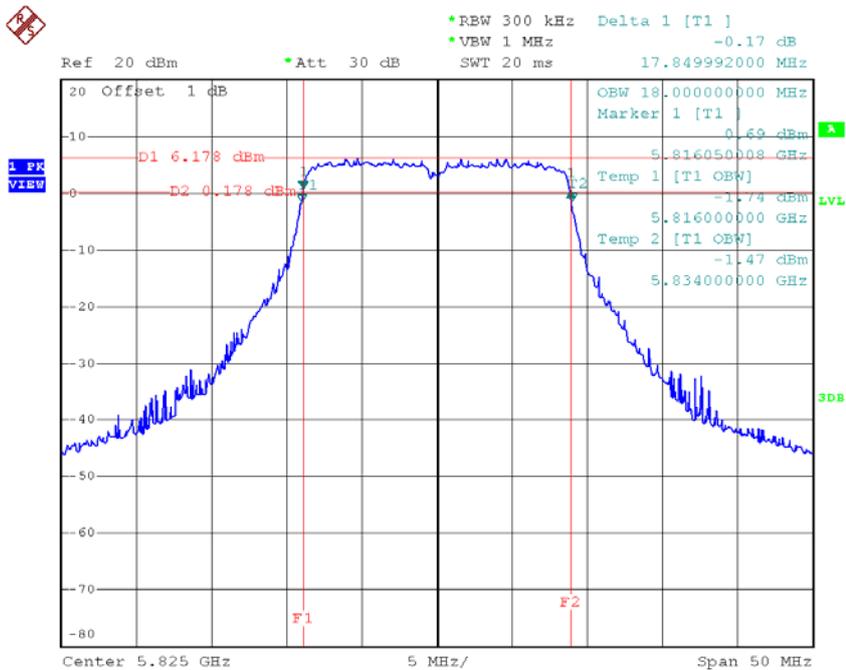


Date: 23.JUL.2015 14:09:17

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

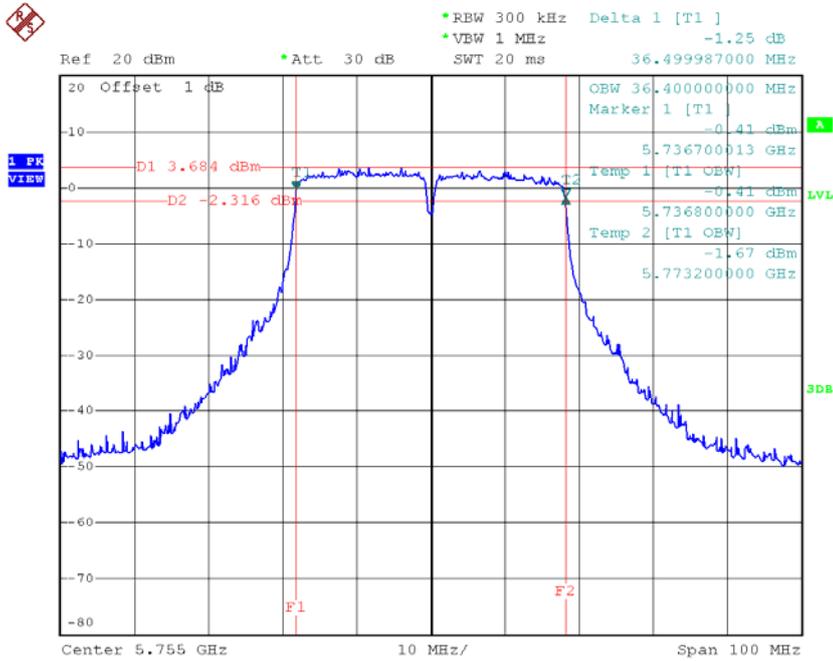

Date: 23.JUL.2015 14:42:40

TX CH 159

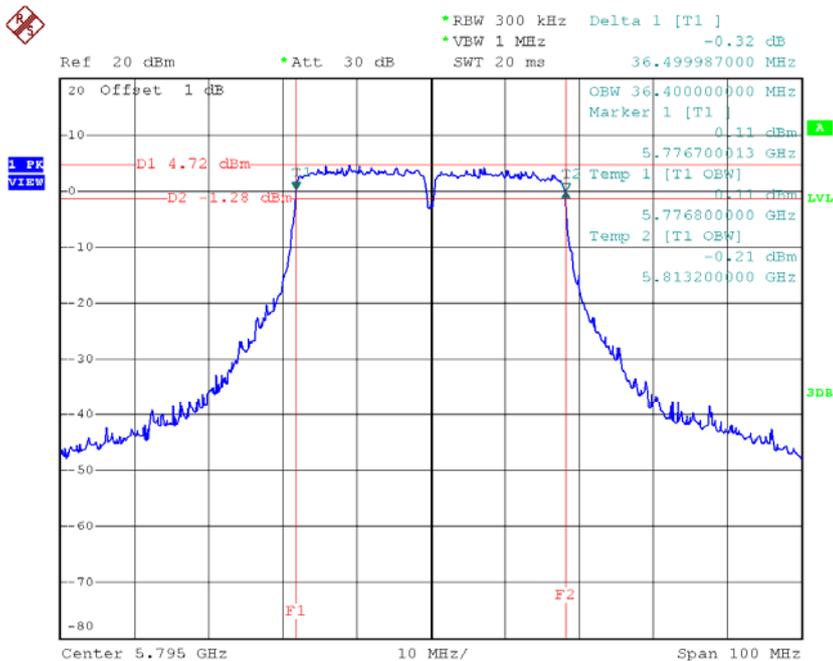


Date: 23.JUL.2015 14:44:10

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	23.65	18.00
CH40	5200	23.25	18.00
CH48	5240	23.10	18.00

TX CH36

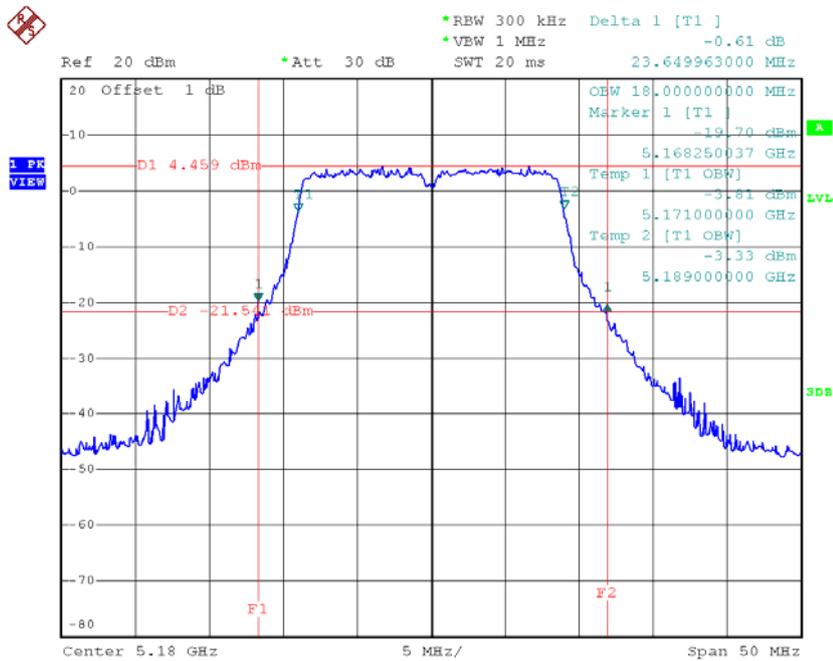


Date: 23.JUL.2015 14:11:58

TX CH40

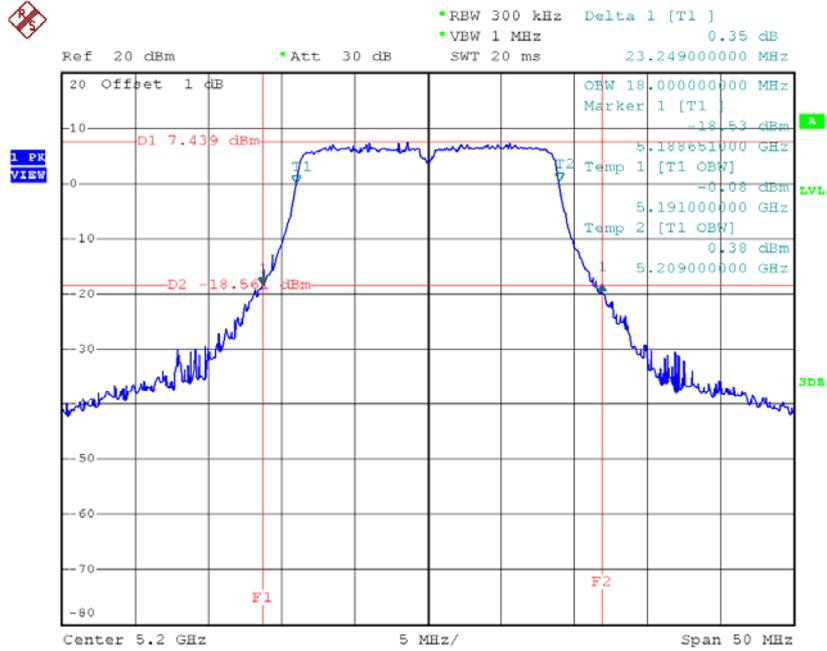

Date: 23.JUL.2015 14:13:27

TX CH48

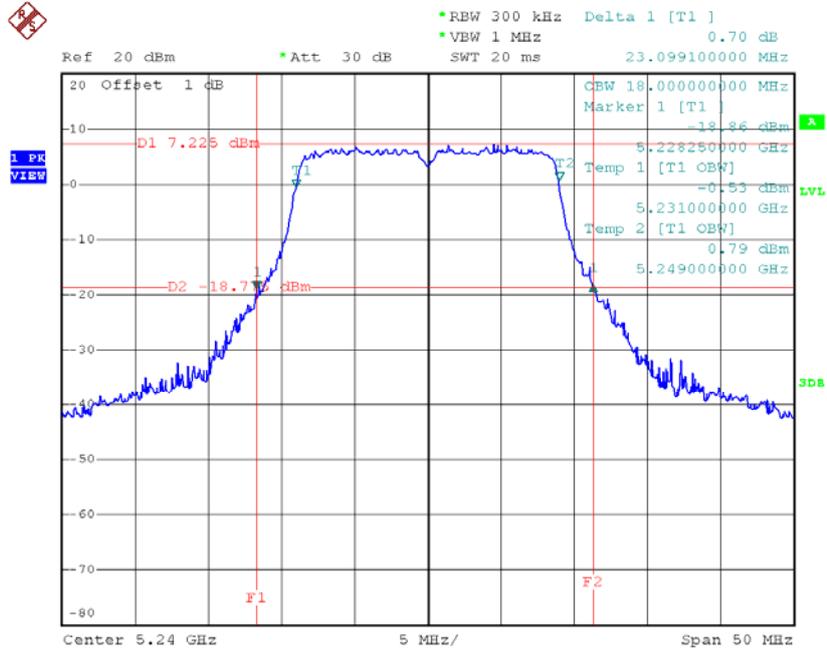


Date: 23.JUL.2015 14:14:25

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	42.90	36.40
CH46	5230	42.79	36.40

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	84.20	75.60

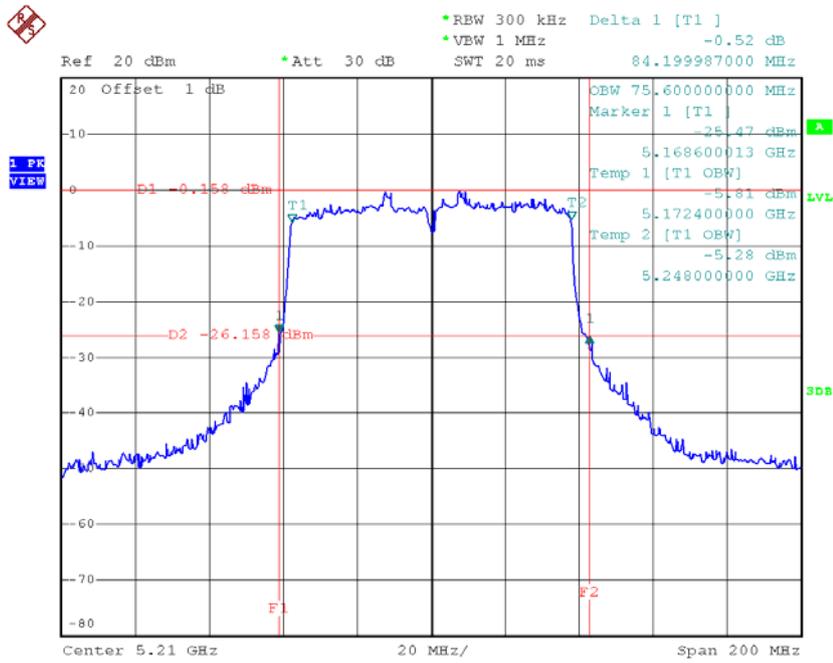
TX CH42


Date: 23.JUL.2015 15:09:13

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.89	18.00
CH60	5300	23.20	18.00
CH64	5320	23.16	18.00

TX CH52

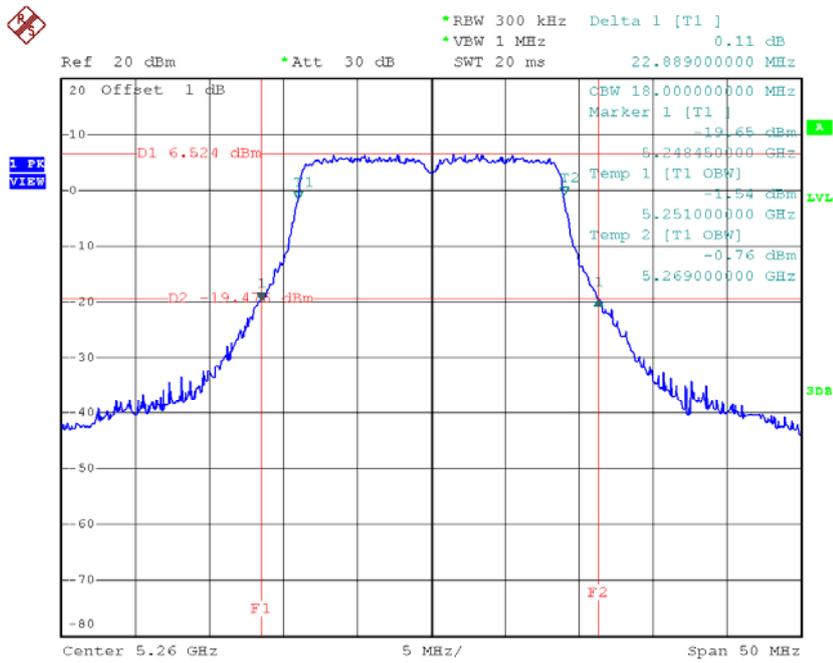


Date: 23.JUL.2015 14:15:33

TX CH60

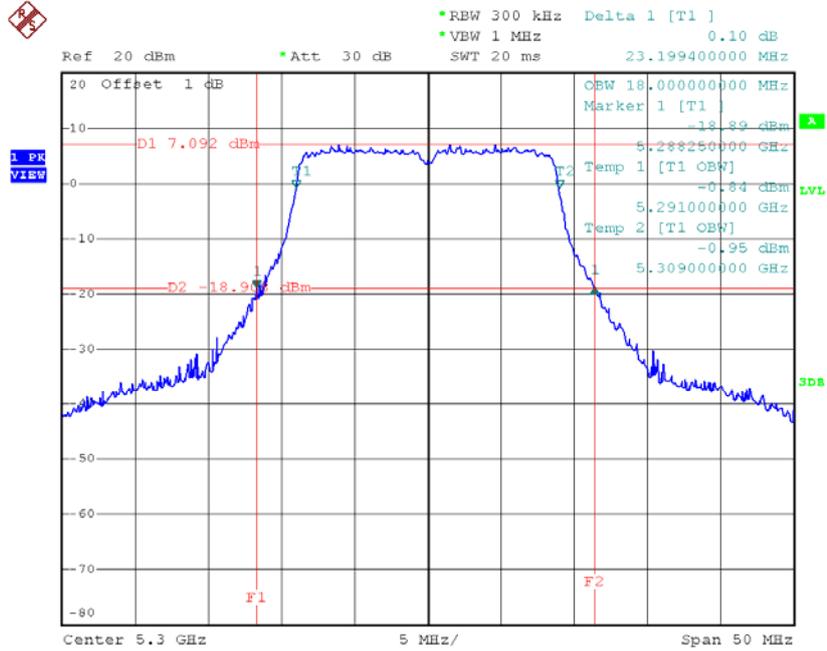

Date: 23.JUL.2015 14:16:40

TX CH64

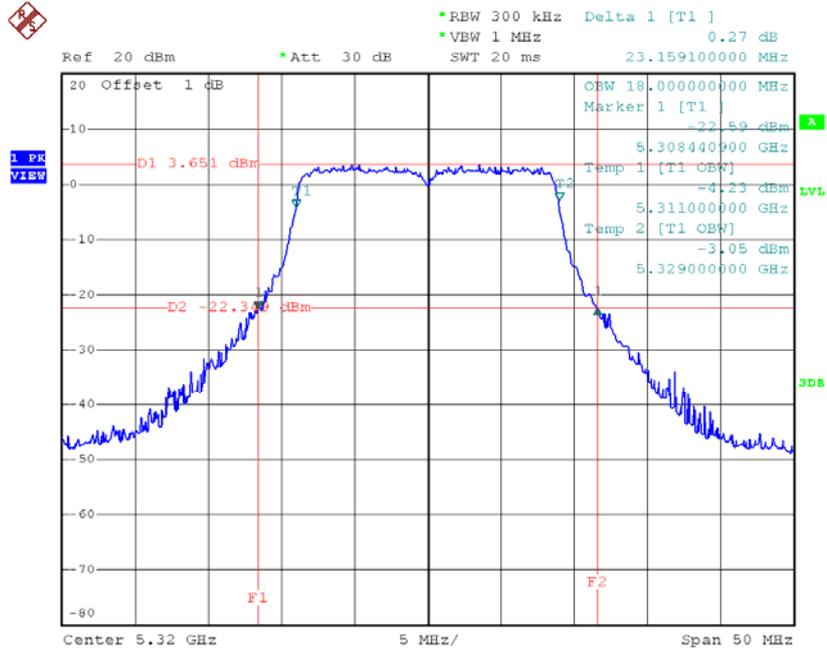


Date: 23.JUL.2015 14:18:26

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	44.30	36.40
CH62	5310	44.10	36.40

TX CH54

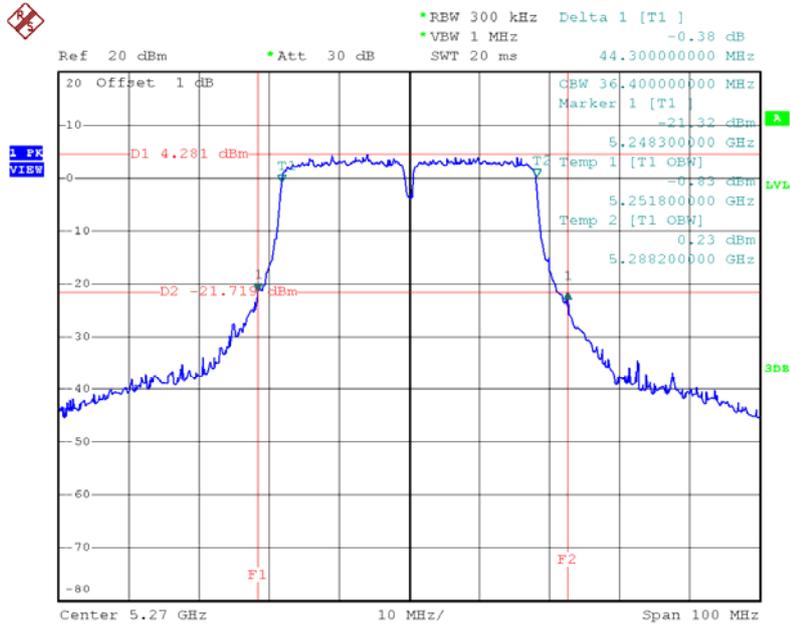

Date: 23.JUL.2015 14:51:03

TX CH62

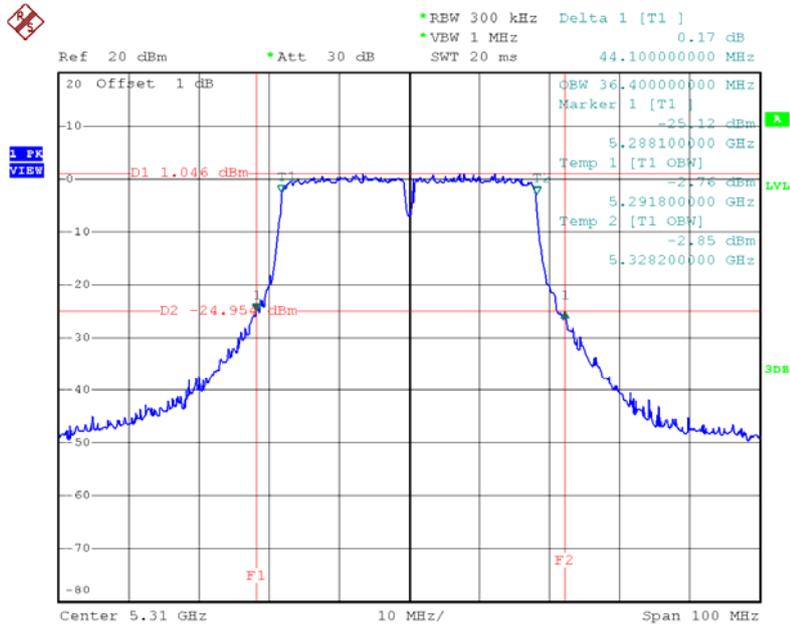


Date: 23.JUL.2015 14:52:19

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	83.00	76.00

TX CH58

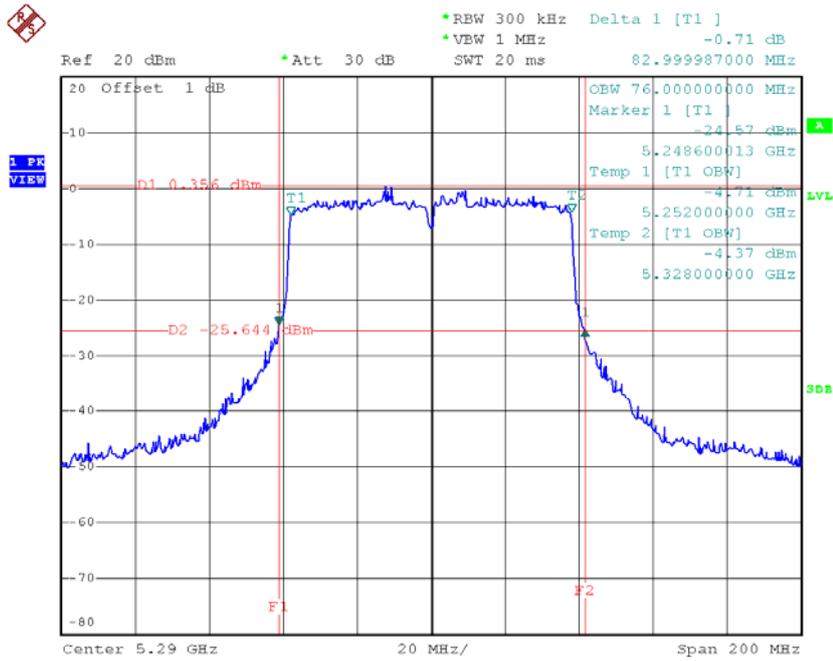


Date: 23.JUL.2015 15:11:34

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	23.29	18.00
CH116	5580	23.00	18.00
CH140	5700	23.50	18.10

TX CH100

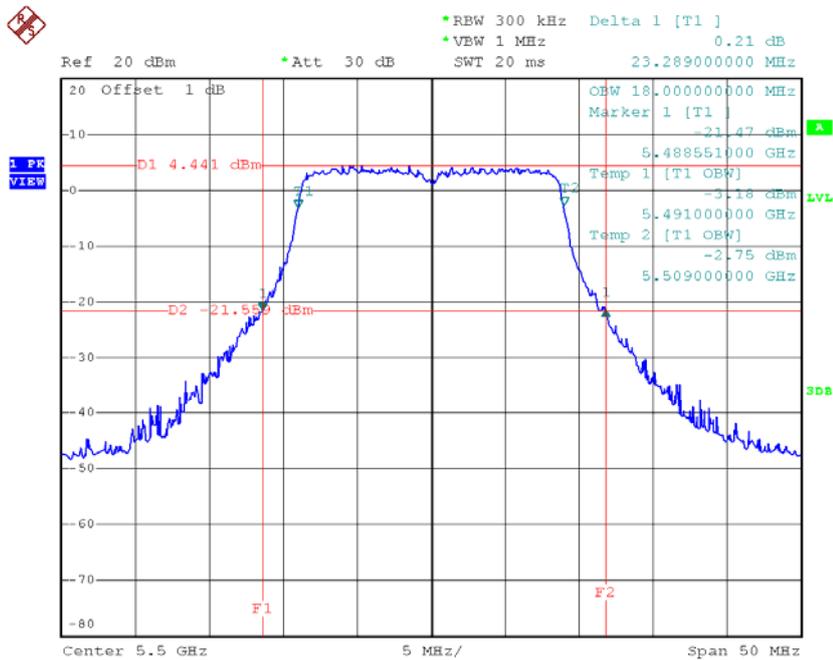


Date: 23.JUL.2015 14:20:24

TX CH116

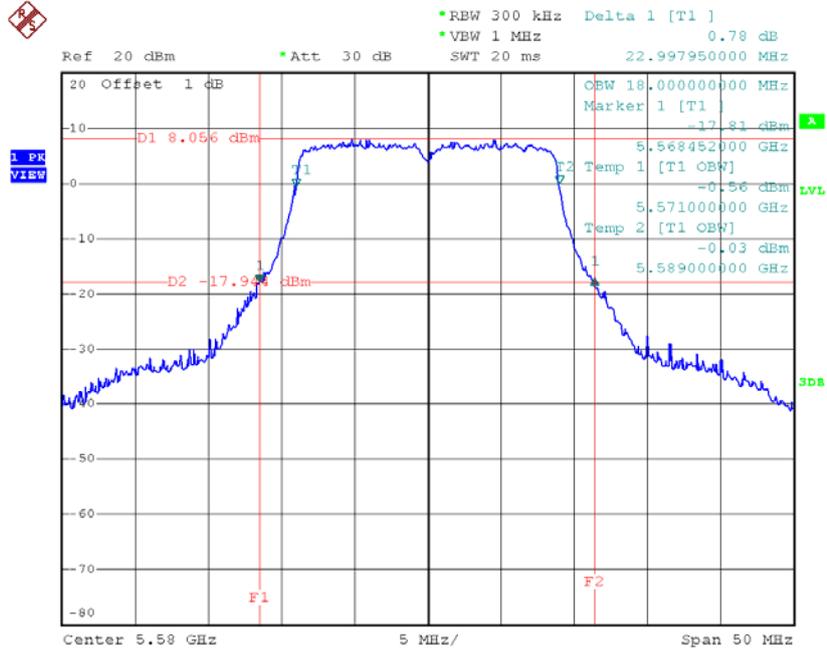


Date: 23.JUL.2015 14:21:36

TX CH140

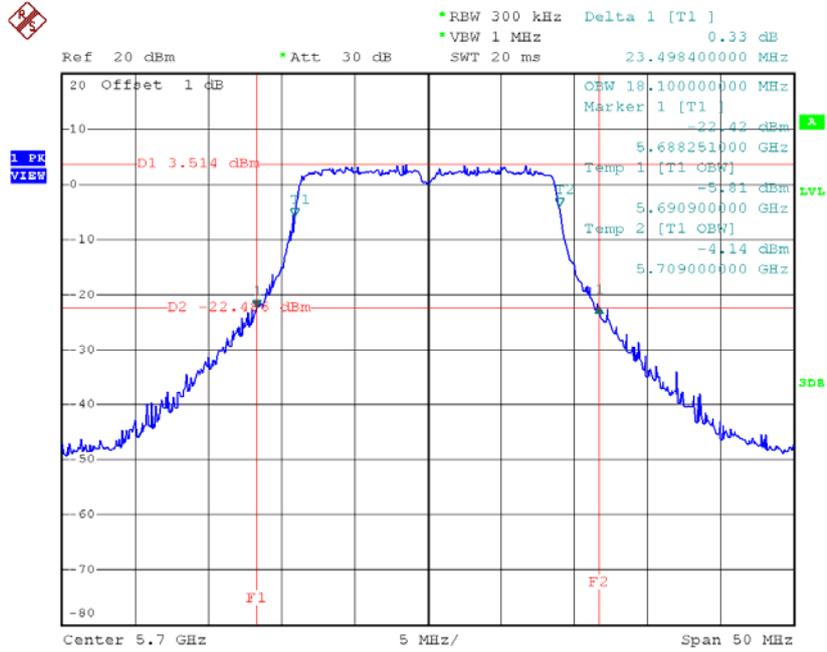


Date: 23.JUL.2015 14:22:52

TX CH110

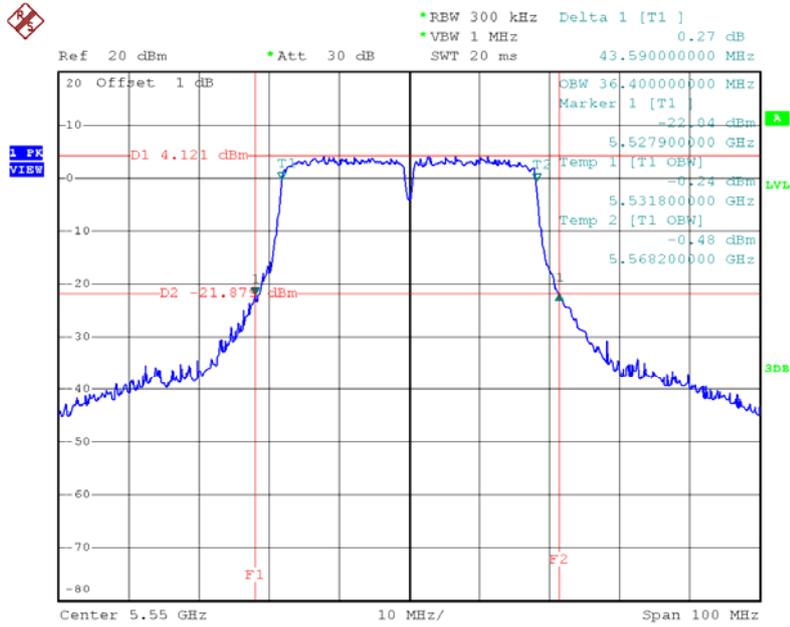

Date: 23.JUL.2015 14:57:49

TX CH134

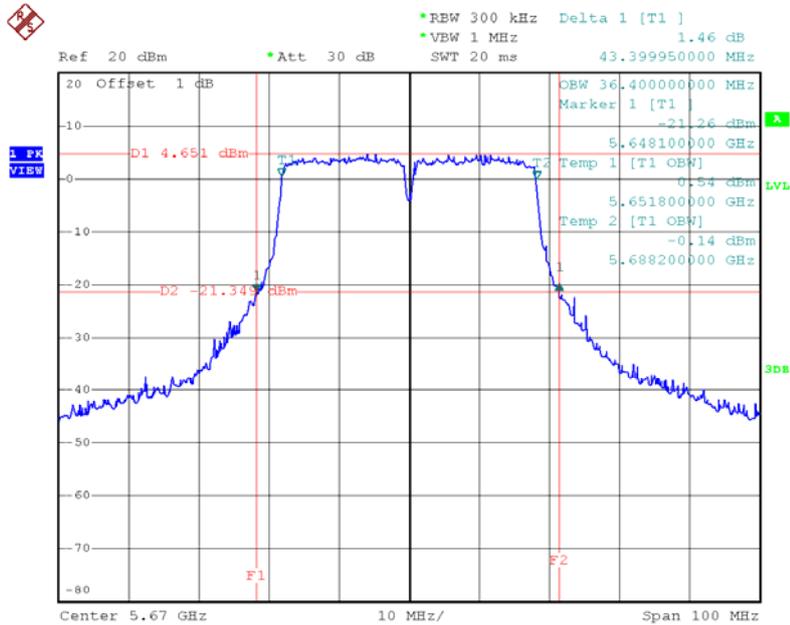


Date: 23.JUL.2015 15:01:37

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	83.20	76.00
CH122	5610	83.40	76.00

TX CH106

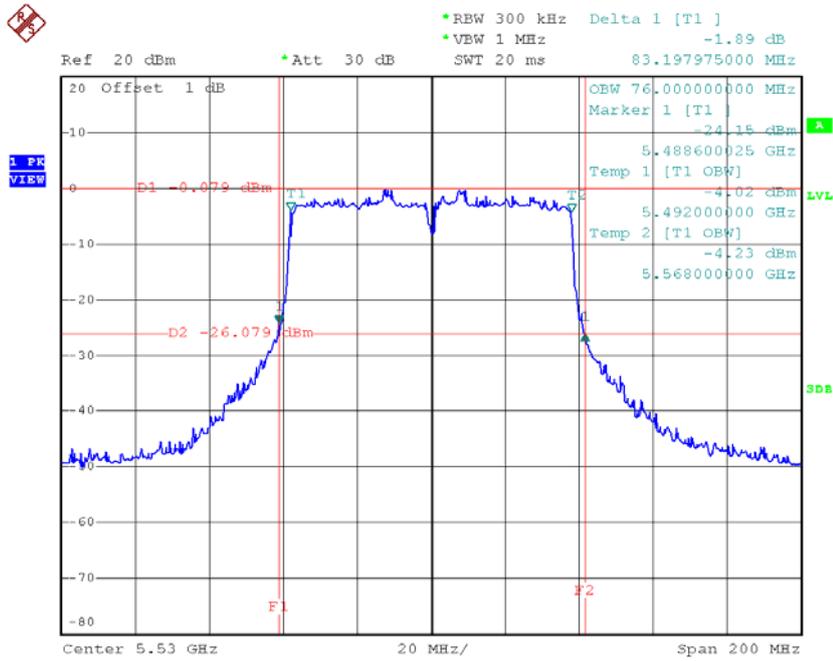

Date: 23.JUL.2015 15:15:08

TX CH122

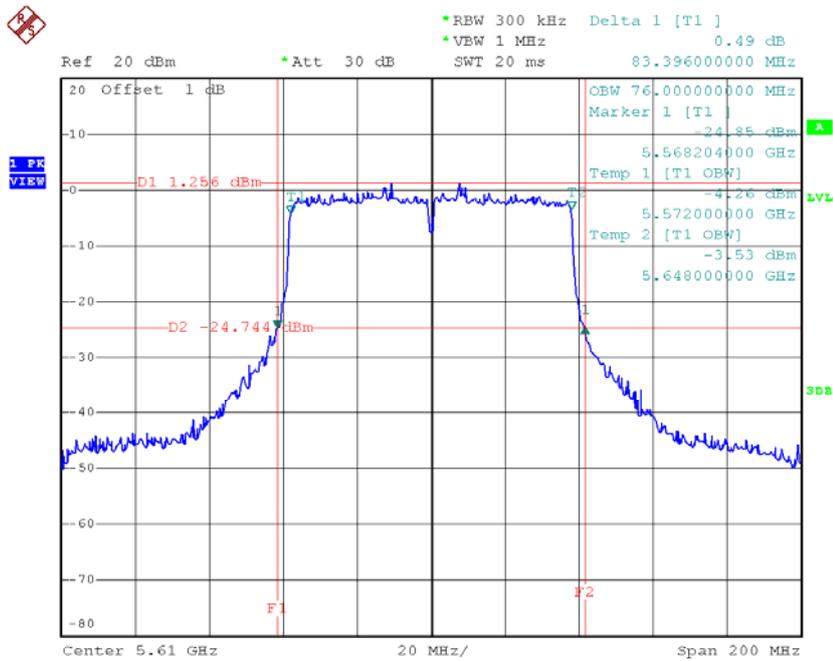


Date: 23.JUL.2015 15:17:17

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.85	18.00	>=500
CH157	5785	17.85	18.00	>=500
CH165	5825	17.85	18.10	>=500

TX CH 149

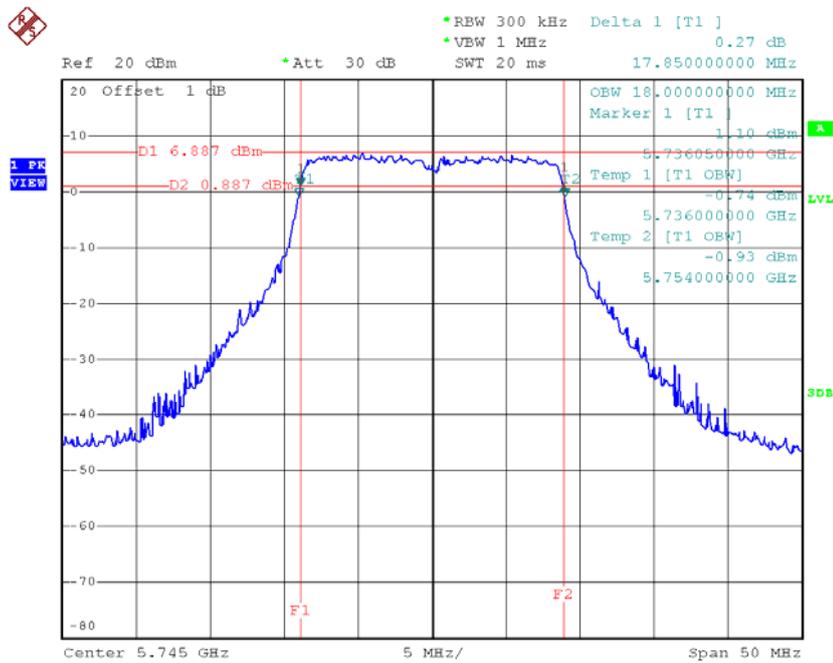


Date: 23.JUL.2015 14:25:17

TX CH 157

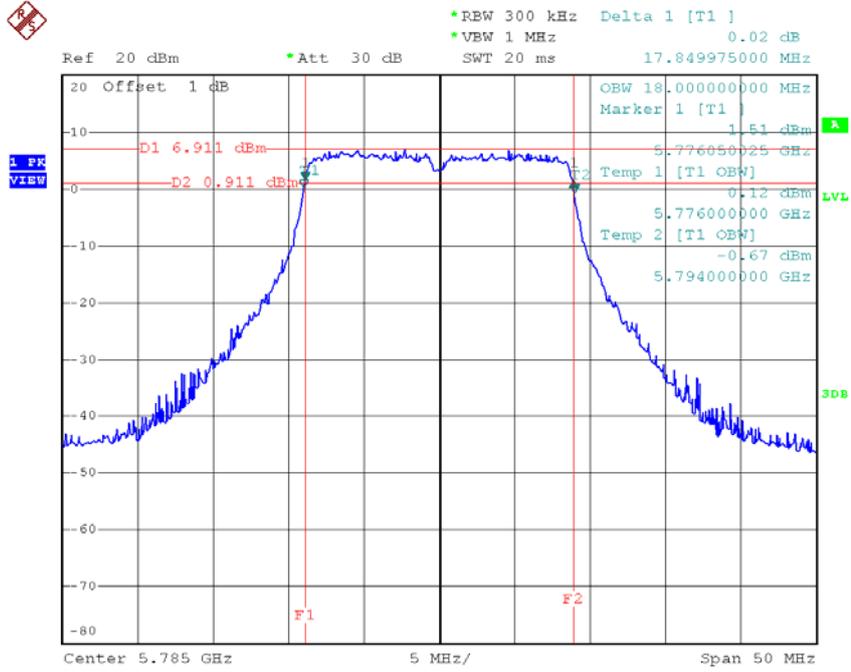

Date: 23.JUL.2015 14:26:39

TX CH 165

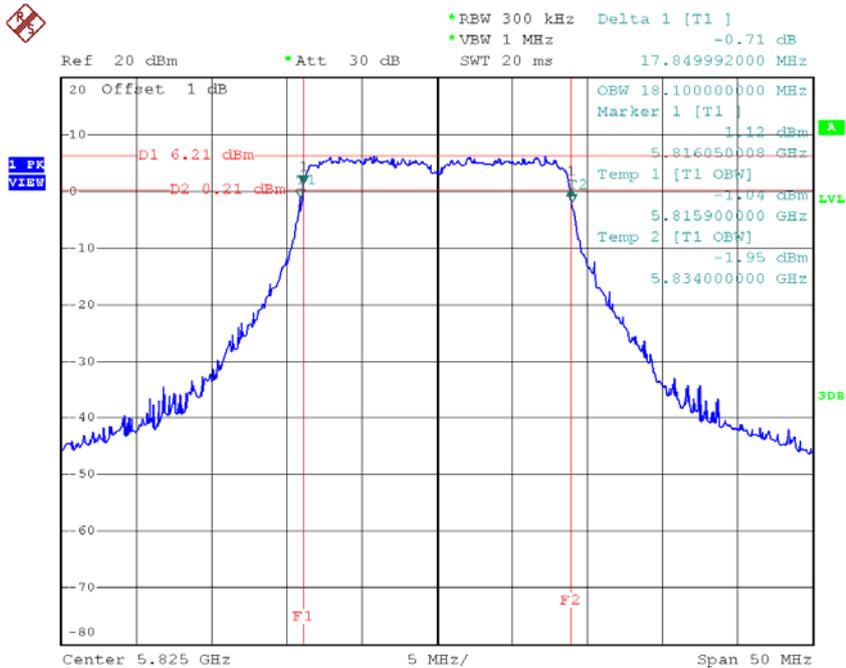


Date: 23.JUL.2015 14:27:42

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

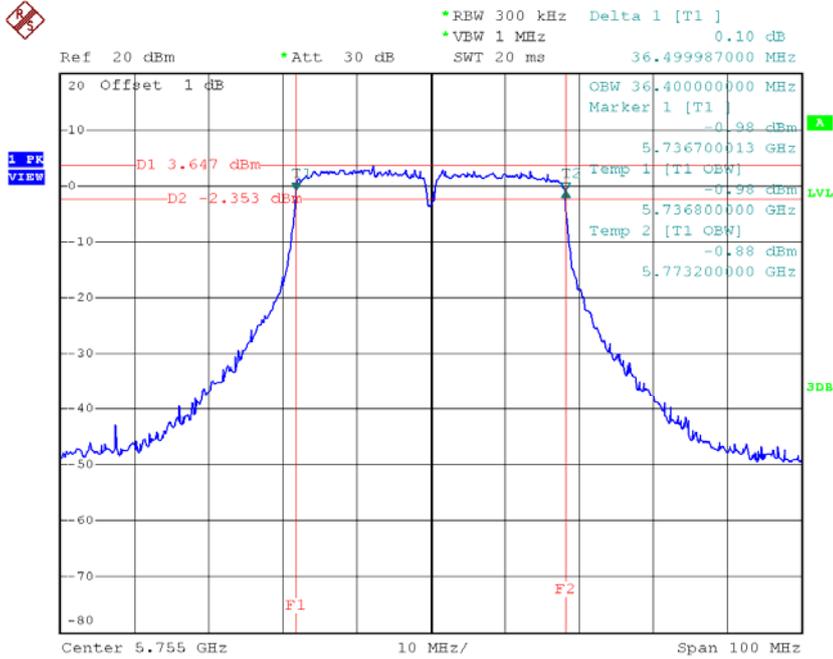

Date: 23.JUL.2015 15:03:10

TX CH 159

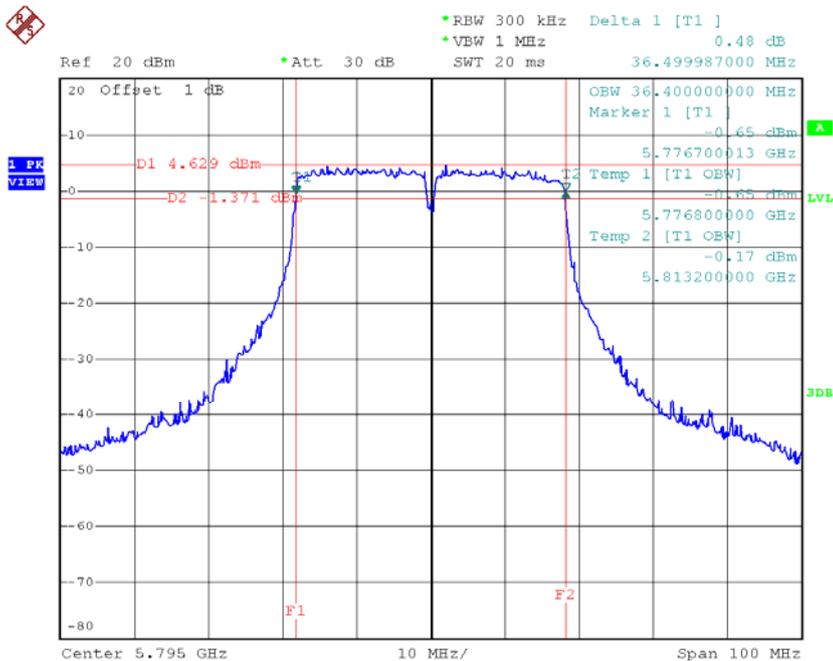


Date: 23.JUL.2015 15:04:21

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.20	76.00	>=500

TX CH 155

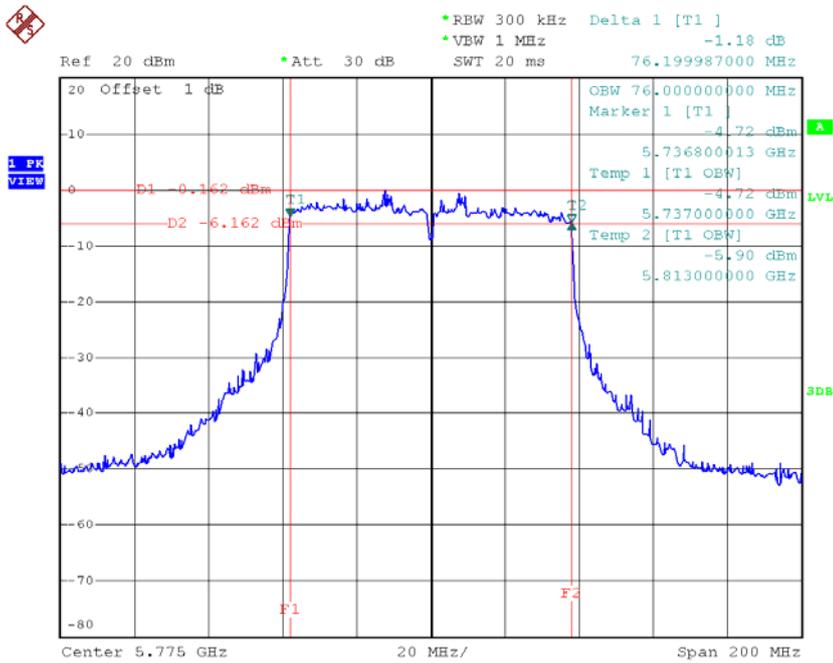

Date: 23.JUL.2015 15:19:43

ATTACHMENT F - MAXIMUM OUTPUT POWER

For 1TX

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.52	0.39	11.91	30.00	1.00
CH40	5200	14.67	0.39	15.06	30.00	1.00
CH48	5240	14.59	0.39	14.98	30.00	1.00

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.91	5.5	17.41	23.00	0.20
CH40	5200	15.06	5.5	20.56	23.00	0.20
CH48	5240	14.98	5.5	20.48	23.00	0.20

Test Mode: UNII-1/TX N20 Mode

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.46	0.10	11.56	30.00	1.00
CH40	5200	14.78	0.10	14.88	30.00	1.00
CH48	5240	14.65	0.10	14.75	30.00	1.00

Test Mode: UNII-1/TX N20 Mode

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.56	5.5	17.06	23.00	0.20
CH40	5200	14.88	5.5	20.38	23.00	0.20
CH48	5240	14.75	5.5	20.25	23.00	0.20

Test Mode: UNII-1/TX N40 Mode

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.89	0.32	12.21	30.00	1.00
CH46	5230	14.99	0.32	15.31	30.00	1.00

Test Mode: UNII-1/TX N40 Mode

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	12.21	5.5	17.71	23.00	0.20
CH46	5230	15.31	5.5	20.81	23.00	0.20

Test Mode: UNII-2A/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.52	0.39	14.91	24.00	0.25
CH60	5300	14.54	0.39	14.93	24.00	0.25
CH64	5320	11.36	0.39	11.75	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.84	0.10	14.94	24.00	0.25
CH60	5300	14.59	0.10	14.69	24.00	0.25
CH64	5320	11.52	0.10	11.62	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.61	0.32	14.93	24.00	0.25
CH62	5310	11.53	0.32	11.85	24.00	0.25

Test Mode: UNII-2C/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.56	0.39	11.95	24.00	0.25
CH116	5580	14.67	0.39	15.06	24.00	0.25
CH140	5700	11.52	0.39	11.91	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.65	0.10	11.75	24.00	0.25
CH116	5580	14.87	0.10	14.97	24.00	0.25
CH140	5700	11.54	0.10	11.64	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.54	0.32	14.86	24.00	0.25
CH110	5550	14.51	0.32	14.83	24.00	0.25
CH134	5670	14.71	0.32	15.03	24.00	0.25

Test Mode: UNII-3/ TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.71	0.39	15.10	30.00	1.00
CH157	5785	14.65	0.39	15.04	30.00	1.00
CH165	5825	14.53	0.39	14.92	30.00	1.00

Test Mode: UNII-3/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.71	0.10	14.81	30.00	1.00
CH157	5785	14.65	0.10	14.75	30.00	1.00
CH165	5825	14.53	0.10	14.63	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.47	0.32	14.79	30.00	1.00
CH159	5795	14.89	0.32	15.21	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.34	0.10	11.44	30.00	1.00
CH40	5200	14.71	0.10	14.81	30.00	1.00
CH48	5240	14.62	0.10	14.72	30.00	1.00

T Test Mode: UNII-1/TX AC20 Mode

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.44	5.5	16.94	23.00	0.20
CH40	5200	14.81	5.5	20.31	23.00	0.20
CH48	5240	14.72	5.5	20.22	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.74	1.13	12.87	30.00	1.00
CH46	5230	14.68	1.13	15.81	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	12.87	5.5	18.37	23.00	0.20
CH46	5230	15.81	5.5	21.31	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	11.52	0.48	12.00	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	12.00	5.5	17.50	23.00	0.20

Test Mode: UNII-2A/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.87	0.10	14.97	24.00	0.25
CH60	5300	14.56	0.10	14.66	24.00	0.25
CH64	5320	11.74	0.10	11.84	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.52	1.13	15.65	24.00	0.25
CH62	5310	11.37	1.13	12.50	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	11.67	0.48	12.15	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.62	0.10	11.72	24.00	0.25
CH116	5580	14.71	0.10	14.81	24.00	0.25
CH140	5700	11.65	0.10	11.75	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.65	1.13	15.78	24.00	0.25
CH110	5550	14.56	1.13	15.69	24.00	0.25
CH134	5670	14.73	1.13	15.86	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	11.32	0.48	11.80	24.00	0.25
CH122	5610	11.43	0.48	11.91	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.83	0.10	14.93	30.00	1.00
CH157	5785	14.76	0.10	14.86	30.00	1.00
CH165	5825	14.58	0.10	14.68	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.41	1.13	15.54	30.00	1.00
CH159	5795	14.76	1.13	15.89	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.37	0.48	11.85	30.00	1.00

For 2TX

Test Mode: UNII-1/TX A Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.47	0.39	8.86	30.00	1.00
CH40	5200	11.36	0.39	11.75	30.00	1.00
CH48	5240	11.47	0.39	11.86	30.00	1.00

Test Mode: UNII-1/TX A Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.45	0.39	8.84	30.00	1.00
CH40	5200	11.64	0.39	12.03	30.00	1.00
CH48	5240	11.53	0.39	11.92	30.00	1.00

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.86	30.00	1.00
CH40	5200	14.90	30.00	1.00
CH48	5240	14.90	30.00	1.00

Test Mode: UNII-1/TX A Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.86	5.5	14.36	23.00	0.20
CH40	5200	11.75	5.5	17.25	23.00	0.20
CH48	5240	11.86	5.5	17.36	23.00	0.20

Test Mode: UNII-1/TX A Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.84	5.5	14.34	23.00	0.20
CH40	5200	12.03	5.5	17.53	23.00	0.20
CH48	5240	11.92	5.5	17.42	23.00	0.20

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.36	23.00	0.20
CH40	5200	20.40	23.00	0.20
CH48	5240	20.40	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.47	0.10	8.57	30.00	1.00
CH40	5200	11.38	0.10	11.48	30.00	1.00
CH48	5240	11.46	0.10	11.56	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.74	0.10	8.84	30.00	1.00
CH40	5200	11.65	0.10	11.75	30.00	1.00
CH48	5240	11.58	0.10	11.68	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.72	30.00	1.00
CH40	5200	14.63	30.00	1.00
CH48	5240	14.63	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.57	5.5	14.07	23.00	0.20
CH40	5200	11.48	5.5	16.98	23.00	0.20
CH48	5240	11.56	5.5	17.06	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.84	5.5	14.34	23.00	0.20
CH40	5200	11.75	5.5	17.25	23.00	0.20
CH48	5240	11.68	5.5	17.18	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.22	23.00	0.20
CH40	5200	20.13	23.00	0.20
CH48	5240	20.13	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.52	0.32	8.84	30.00	1.00
CH46	5230	11.69	0.32	12.01	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.52	0.32	8.84	30.00	1.00
CH46	5230	11.79	0.32	12.11	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.85	30.00	1.00
CH46	5230	15.07	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.84	5.5	14.34	23.00	0.20
CH46	5230	12.01	5.5	17.51	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.84	5.5	10.13	23.00	0.20
CH46	5230	12.11	5.5	12.20	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	17.35	23.00	0.20
CH46	5230	20.57	23.00	0.20

Test Mode: UNII-2A/TX A Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.81	0.39	12.20	24.00	0.25
CH60	5300	11.92	0.39	12.31	24.00	0.25
CH64	5320	8.78	0.39	9.17	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.89	0.39	12.28	24.00	0.25
CH60	5300	11.92	0.39	12.31	24.00	0.25
CH64	5320	8.41	0.39	8.80	24.00	0.25

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.25	24.00	0.25
CH60	5300	15.32	24.00	0.25
CH64	5320	12.00	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.95	0.10	12.05	24.00	0.25
CH60	5300	11.85	0.10	11.95	24.00	0.25
CH64	5320	8.87	0.10	8.97	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.89	0.10	11.99	24.00	0.25
CH60	5300	11.74	0.10	11.84	24.00	0.25
CH64	5320	8.61	0.10	8.71	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.03	24.00	0.25
CH60	5300	14.91	24.00	0.25
CH64	5320	11.85	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.34	0.32	11.66	24.00	0.25
CH62	5310	8.74	0.32	9.06	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.63	0.32	11.95	24.00	0.25
CH62	5310	8.74	0.32	9.06	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.82	24.00	0.25
CH62	5310	12.07	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	8.84	0.39	9.23	24.00	0.25
CH116	5580	11.79	0.39	12.18	24.00	0.25
CH140	5700	8.52	0.39	8.91	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	8.52	0.39	8.91	24.00	0.25
CH116	5580	11.84	0.39	12.23	24.00	0.25
CH140	5700	8.54	0.39	8.93	24.00	0.25

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.08	24.00	0.25
CH116	5580	15.22	24.00	0.25
CH140	5700	11.93	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	8.74	0.10	8.84	24.00	0.25
CH116	5580	11.86	0.10	11.96	24.00	0.25
CH140	5700	8.53	0.10	8.63	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	8.72	0.10	8.82	24.00	0.25
CH116	5580	11.83	0.10	11.93	24.00	0.25
CH140	5700	8.62	0.10	8.72	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.84	24.00	0.25
CH116	5580	14.96	24.00	0.25
CH140	5700	11.69	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.45	0.32	11.77	24.00	0.25
CH110	5550	11.57	0.32	11.89	24.00	0.25
CH134	5670	11.68	0.32	12.00	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.54	0.32	11.86	24.00	0.25
CH110	5550	11.63	0.32	11.95	24.00	0.25
CH134	5670	11.81	0.32	12.13	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.83	24.00	0.25
CH110	5550	14.93	24.00	0.25
CH134	5670	15.08	24.00	0.25

Test Mode: UNII-3/ TX A Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.91	0.39	12.30	30.00	1.00
CH157	5785	11.93	0.39	12.32	30.00	1.00
CH165	5825	11.58	0.39	11.97	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.87	0.39	12.26	30.00	1.00
CH157	5785	11.82	0.39	12.21	30.00	1.00
CH165	5825	11.56	0.39	11.95	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.29	30.00	1.00
CH157	5785	15.28	30.00	1.00
CH165	5825	14.97	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.91	0.10	12.01	30.00	1.00
CH157	5785	11.83	0.10	11.93	30.00	1.00
CH165	5825	11.54	0.10	11.64	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.69	0.10	11.79	30.00	1.00
CH157	5785	11.86	0.10	11.96	30.00	1.00
CH165	5825	11.57	0.10	11.67	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.91	30.00	1.00
CH157	5785	14.96	30.00	1.00
CH165	5825	14.67	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.83	0.32	12.15	30.00	1.00
CH159	5795	11.41	0.32	11.73	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.72	0.32	12.04	30.00	1.00
CH159	5795	11.65	0.32	11.97	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.11	30.00	1.00
CH159	5795	14.86	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.52	0.10	8.62	30.00	1.00
CH40	5200	11.25	0.10	11.35	30.00	1.00
CH48	5240	11.38	0.10	11.48	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.31	0.10	8.41	30.00	1.00
CH40	5200	11.25	0.10	11.35	30.00	1.00
CH48	5240	11.38	0.10	11.48	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.53	30.00	1.00
CH40	5200	14.36	30.00	1.00
CH48	5240	14.49	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.62	5.5	14.12	23.00	0.20
CH40	5200	11.35	5.5	16.85	23.00	0.20
CH48	5240	11.48	5.5	16.98	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.41	5.5	13.91	23.00	0.20
CH40	5200	11.35	5.5	16.85	23.00	0.20
CH48	5240	11.48	5.5	16.98	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.03	23.00	0.20
CH40	5200	19.86	23.00	0.20
CH48	5240	19.99	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.67	1.13	9.80	30.00	1.00
CH46	5230	11.73	1.13	12.86	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.82	1.13	9.95	30.00	1.00
CH46	5230	11.84	1.13	12.97	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	12.89	30.00	1.00
CH46	5230	15.93	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	9.80	5.5	15.30	23.00	0.20
CH46	5230	12.86	5.5	18.36	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	9.95	5.5	15.45	23.00	0.20
CH46	5230	12.97	5.5	18.47	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	18.39	23.00	0.20
CH46	5230	21.43	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	8.47	0.48	8.95	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	8.97	0.48	9.45	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	12.22	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	8.95	5.5	14.45	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	9.45	5.5	14.95	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	17.72	23.00	0.20

Test Mode: UNII-2A/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.87	0.10	11.97	24.00	0.25
CH60	5300	11.93	0.10	12.03	24.00	0.25
CH64	5320	8.87	0.10	8.97	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.86	0.10	11.96	24.00	0.25
CH60	5300	11.91	0.10	12.01	24.00	0.25
CH64	5320	8.36	0.10	8.46	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.98	24.00	0.25
CH60	5300	15.03	24.00	0.25
CH64	5320	11.73	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.26	1.13	12.39	24.00	0.25
CH62	5310	8.81	1.13	9.94	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.37	1.13	12.50	24.00	0.25
CH62	5310	8.78	1.13	9.91	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.46	24.00	0.25
CH62	5310	12.94	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	8.52	0.48	9.00	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	8.92	0.48	9.40	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	12.21	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	8.89	0.10	8.99	24.00	0.25
CH116	5580	11.97	0.10	12.07	24.00	0.25
CH140	5700	8.46	0.10	8.56	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	8.89	0.10	8.99	24.00	0.25
CH116	5580	11.97	0.10	12.07	24.00	0.25
CH140	5700	8.37	0.10	8.47	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.00	24.00	0.25
CH116	5580	15.08	24.00	0.25
CH140	5700	11.53	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.36	1.13	12.49	24.00	0.25
CH110	5550	11.54	1.13	12.67	24.00	0.25
CH134	5670	11.69	1.13	12.82	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.24	1.13	12.37	24.00	0.25
CH110	5550	11.25	1.13	12.38	24.00	0.25
CH134	5670	11.78	1.13	12.91	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.44	24.00	0.25
CH110	5550	15.54	24.00	0.25
CH134	5670	15.88	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	8.74	0.48	9.22	24.00	0.25
CH122	5610	8.63	0.48	9.11	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	8.39	0.48	8.87	24.00	0.25
CH122	5610	8.25	0.48	8.73	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	12.06	24.00	0.25
CH122	5610	11.93	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.89	0.10	11.99	30.00	1.00
CH157	5785	11.76	0.10	11.86	30.00	1.00
CH165	5825	11.46	0.10	11.56	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.83	0.10	11.93	30.00	1.00
CH157	5785	11.79	0.10	11.89	30.00	1.00
CH165	5825	11.46	0.10	11.56	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.97	30.00	1.00
CH157	5785	14.89	30.00	1.00
CH165	5825	14.57	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.43	1.13	12.56	30.00	1.00
CH159	5795	11.37	1.13	12.50	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.38	1.13	12.51	30.00	1.00
CH159	5795	11.24	1.13	12.37	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.55	30.00	1.00
CH159	5795	15.45	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	8.51	0.48	8.99	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	8.57	0.48	9.05	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	12.03	30.00	1.00

For 3TX

Test Mode: UNII-1/TX A Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.52	0.39	6.91	30.00	1.00
CH40	5200	9.87	0.39	10.26	30.00	1.00
CH48	5240	9.58	0.39	9.97	30.00	1.00

Test Mode: UNII-1/TX A Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.58	0.39	6.97	30.00	1.00
CH40	5200	9.57	0.39	9.96	30.00	1.00
CH48	5240	9.62	0.39	10.01	30.00	1.00

Test Mode: UNII-1/TX A Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.78	0.39	7.17	30.00	1.00
CH40	5200	9.57	0.39	9.96	30.00	1.00
CH48	5240	9.64	0.39	10.03	30.00	1.00

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.79	30.00	1.00
CH40	5200	14.83	30.00	1.00
CH48	5240	14.77	30.00	1.00

Test Mode: UNII-1/TX A Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.91	5.5	12.41	23.00	0.20
CH40	5200	10.26	5.5	15.76	23.00	0.20
CH48	5240	9.97	5.5	15.47	23.00	0.20

Test Mode: UNII-1/TX A Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.97	5.5	12.47	23.00	0.20
CH40	5200	9.96	5.5	15.46	23.00	0.20
CH48	5240	10.01	5.5	15.51	23.00	0.20

Test Mode: UNII-1/TX A Mode_ANT C

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	7.17	5.5	12.67	23.00	0.20
CH40	5200	9.96	5.5	15.46	23.00	0.20
CH48	5240	10.03	5.5	15.53	23.00	0.20

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.69	23.00	0.20
CH40	5200	20.33	23.00	0.20
CH48	5240	20.27	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.47	0.10	6.57	30.00	1.00
CH40	5200	9.58	0.10	9.68	30.00	1.00
CH48	5240	9.62	0.10	9.72	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.53	0.10	6.63	30.00	1.00
CH40	5200	9.57	0.10	9.67	30.00	1.00
CH48	5240	9.34	0.10	9.44	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.47	0.10	6.57	30.00	1.00
CH40	5200	9.53	0.10	9.63	30.00	1.00
CH48	5240	9.58	0.10	9.68	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.36	30.00	1.00
CH40	5200	14.43	30.00	1.00
CH48	5240	14.39	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.57	5.5	12.07	23.00	0.20
CH40	5200	9.68	5.5	15.18	23.00	0.20
CH48	5240	9.72	5.5	15.22	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.63	5.5	12.13	23.00	0.20
CH40	5200	9.67	5.5	15.17	23.00	0.20
CH48	5240	9.44	5.5	14.94	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_ANT C

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.57	5.5	12.07	23.00	0.20
CH40	5200	9.63	5.5	15.13	23.00	0.20
CH48	5240	9.68	5.5	15.14	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.86	23.00	0.20
CH40	5200	19.93	23.00	0.20
CH48	5240	19.89	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.57	0.32	6.89	30.00	1.00
CH46	5230	9.48	0.32	9.80	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.53	0.32	6.85	30.00	1.00
CH46	5230	9.78	0.32	10.10	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.58	0.32	6.90	30.00	1.00
CH46	5230	9.74	0.32	10.06	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.65	30.00	1.00
CH46	5230	14.76	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.89	5.5	12.39	23.00	0.20
CH46	5230	9.80	5.5	15.30	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.85	5.5	12.35	23.00	0.20
CH46	5230	10.10	5.5	15.60	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT C

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.90	5.5	12.40	23.00	0.20
CH46	5230	10.06	5.5	15.56	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	17.15	23.00	0.20
CH46	5230	20.26	23.00	0.20

Test Mode: UNII-2A/TX A Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.96	0.39	10.35	24.00	0.25
CH60	5300	9.91	0.39	10.30	24.00	0.25
CH64	5320	6.52	0.39	6.91	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.85	0.39	10.24	24.00	0.25
CH60	5300	9.78	0.39	10.17	24.00	0.25
CH64	5320	6.54	0.39	6.93	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.51	0.39	9.90	24.00	0.25
CH60	5300	9.63	0.39	10.02	24.00	0.25
CH64	5320	6.54	0.39	6.93	24.00	0.25

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.94	24.00	0.25
CH60	5300	14.94	24.00	0.25
CH64	5320	11.69	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.71	0.10	9.81	24.00	0.25
CH60	5300	9.54	0.10	9.64	24.00	0.25
CH64	5320	6.73	0.10	6.83	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.61	0.10	9.71	24.00	0.25
CH60	5300	9.52	0.10	9.62	24.00	0.25
CH64	5320	6.53	0.10	6.63	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.81	0.10	9.91	24.00	0.25
CH60	5300	9.79	0.10	9.89	24.00	0.25
CH64	5320	6.52	0.10	6.62	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.58	24.00	0.25
CH60	5300	14.49	24.00	0.25
CH64	5320	11.47	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	9.61	0.32	9.93	24.00	0.25
CH62	5310	6.52	0.32	6.84	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	9.71	0.32	10.03	24.00	0.25
CH62	5310	6.52	0.32	6.84	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	9.52	0.32	9.84	24.00	0.25
CH62	5310	6.48	0.32	6.80	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.71	24.00	0.25
CH62	5310	11.60	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.47	0.39	6.86	24.00	0.25
CH116	5580	9.64	0.39	10.03	24.00	0.25
CH140	5700	6.58	0.39	6.97	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.62	0.39	7.01	24.00	0.25
CH116	5580	9.74	0.39	10.13	24.00	0.25
CH140	5700	6.52	0.39	6.91	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.72	0.39	7.11	24.00	0.25
CH116	5580	9.83	0.39	10.22	24.00	0.25
CH140	5700	6.61	0.39	7.00	24.00	0.25

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.77	24.00	0.25
CH116	5580	14.90	24.00	0.25
CH140	5700	11.73	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.52	0.10	6.62	24.00	0.25
CH116	5580	9.67	0.10	9.77	24.00	0.25
CH140	5700	6.63	0.10	6.73	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.47	0.10	6.57	24.00	0.25
CH116	5580	9.84	0.10	9.94	24.00	0.25
CH140	5700	6.72	0.10	6.82	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.47	0.10	6.57	24.00	0.25
CH116	5580	9.68	0.10	9.78	24.00	0.25
CH140	5700	6.85	0.10	6.95	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.36	24.00	0.25
CH116	5580	14.60	24.00	0.25
CH140	5700	11.61	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.67	0.32	9.99	24.00	0.25
CH110	5550	9.74	0.32	10.06	24.00	0.25
CH134	5670	9.68	0.32	10.00	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.47	0.32	9.79	24.00	0.25
CH110	5550	9.56	0.32	9.88	24.00	0.25
CH134	5670	9.41	0.32	9.73	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.65	0.32	9.97	24.00	0.25
CH110	5550	9.78	0.32	10.10	24.00	0.25
CH134	5670	9.84	0.32	10.16	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.69	24.00	0.25
CH110	5550	14.79	24.00	0.25
CH134	5670	14.74	24.00	0.25

Test Mode: UNII-3/ TX A Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.67	0.39	10.06	30.00	1.00
CH157	5785	9.58	0.39	9.97	30.00	1.00
CH165	5825	9.49	0.39	9.88	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.79	0.39	10.18	30.00	1.00
CH157	5785	9.81	0.39	10.20	30.00	1.00
CH165	5825	9.56	0.39	9.95	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.78	0.39	10.17	30.00	1.00
CH157	5785	9.64	0.39	10.03	30.00	1.00
CH165	5825	9.71	0.39	10.10	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.91	30.00	1.00
CH157	5785	14.84	30.00	1.00
CH165	5825	14.75	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.71	0.10	9.81	30.00	1.00
CH157	5785	9.65	0.10	9.75	30.00	1.00
CH165	5825	9.81	0.10	9.91	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.47	0.10	9.57	30.00	1.00
CH157	5785	9.54	0.10	9.64	30.00	1.00
CH165	5825	9.68	0.10	9.78	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.57	0.10	9.67	30.00	1.00
CH157	5785	9.64	0.10	9.74	30.00	1.00
CH165	5825	9.71	0.10	9.81	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.46	30.00	1.00
CH157	5785	14.48	30.00	1.00
CH165	5825	14.60	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	9.57	0.32	9.89	30.00	1.00
CH159	5795	9.71	0.32	10.03	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	9.58	0.32	9.90	30.00	1.00
CH159	5795	9.71	0.32	10.03	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	9.45	0.32	9.77	30.00	1.00
CH159	5795	9.51	0.32	9.83	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.62	30.00	1.00
CH159	5795	14.74	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.58	0.10	6.68	30.00	1.00
CH40	5200	9.76	0.10	9.86	30.00	1.00
CH48	5240	9.51	0.10	9.61	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.51	0.10	6.61	30.00	1.00
CH40	5200	9.52	0.10	9.62	30.00	1.00
CH48	5240	9.16	0.10	9.26	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.54	0.10	6.64	30.00	1.00
CH40	5200	9.72	0.10	9.82	30.00	1.00
CH48	5240	9.65	0.10	9.75	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.41	30.00	1.00
CH40	5200	14.54	30.00	1.00
CH48	5240	14.32	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.68	5.5	12.18	23.00	0.20
CH40	5200	9.86	5.5	15.36	23.00	0.20
CH48	5240	9.61	5.5	15.11	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.61	5.5	12.11	23.00	0.20
CH40	5200	9.62	5.5	15.12	23.00	0.20
CH48	5240	9.26	5.5	14.76	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_ANT C

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	6.64	5.5	12.14	23.00	0.20
CH40	5200	9.82	5.5	15.32	23.00	0.20
CH48	5240	9.75	5.5	15.25	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.91	23.00	0.20
CH40	5200	20.04	23.00	0.20
CH48	5240	19.82	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.87	1.13	8.00	30.00	1.00
CH46	5230	9.58	1.13	10.71	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.70	1.13	7.83	30.00	1.00
CH46	5230	9.61	1.13	10.74	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.87	1.13	8.00	30.00	1.00
CH46	5230	9.52	1.13	10.65	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	12.72	30.00	1.00
CH46	5230	15.47	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.00	5.5	13.50	23.00	0.20
CH46	5230	10.71	5.5	16.21	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	7.83	5.5	13.33	23.00	0.20
CH46	5230	10.74	5.5	16.24	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT C

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.00	5.5	13.50	23.00	0.20
CH46	5230	10.65	5.5	16.15	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	18.22	23.00	0.20
CH46	5230	20.97	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	6.52	0.48	7.00	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	6.99	0.48	7.47	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	6.54	0.48	7.02	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	11.94	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	7.00	5.5	12.50	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	7.47	5.5	12.97	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	7.02	5.5	12.52	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	17.44	23.00	0.20

Test Mode: UNII-2A/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.74	0.10	9.84	24.00	0.25
CH60	5300	9.69	0.10	9.79	24.00	0.25
CH64	5320	6.83	0.10	6.93	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.58	0.10	9.68	24.00	0.25
CH60	5300	9.61	0.10	9.71	24.00	0.25
CH64	5320	6.91	0.10	7.01	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.87	0.10	9.97	24.00	0.25
CH60	5300	9.78	0.10	9.88	24.00	0.25
CH64	5320	6.89	0.10	6.99	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.60	24.00	0.25
CH60	5300	14.57	24.00	0.25
CH64	5320	11.75	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	9.71	1.13	10.84	24.00	0.25
CH62	5310	6.74	1.13	7.87	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	9.29	1.13	10.42	24.00	0.25
CH62	5310	6.27	1.13	7.40	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	9.63	1.13	10.76	24.00	0.25
CH62	5310	6.87	1.13	8.00	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.45	24.00	0.25
CH62	5310	12.54	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	6.71	0.48	7.19	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	6.47	0.48	6.95	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	6.74	0.48	7.22	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	11.89	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.52	0.10	6.62	24.00	0.25
CH116	5580	9.71	0.10	9.81	24.00	0.25
CH140	5700	6.53	0.10	6.63	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.77	0.10	6.87	24.00	0.25
CH116	5580	9.77	0.10	9.87	24.00	0.25
CH140	5700	6.69	0.10	6.79	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.56	0.10	6.66	24.00	0.25
CH116	5580	9.45	0.10	9.55	24.00	0.25
CH140	5700	6.58	0.10	6.68	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.49	24.00	0.25
CH116	5580	14.52	24.00	0.25
CH140	5700	11.47	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.52	1.13	10.65	24.00	0.25
CH110	5550	9.61	1.13	10.74	24.00	0.25
CH134	5670	9.73	1.13	10.86	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.19	1.13	10.32	24.00	0.25
CH110	5550	9.21	1.13	10.34	24.00	0.25
CH134	5670	9.83	1.13	10.96	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.74	1.13	10.87	24.00	0.25
CH110	5550	9.82	1.13	10.95	24.00	0.25
CH134	5670	9.47	1.13	10.60	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.39	24.00	0.25
CH110	5550	15.46	24.00	0.25
CH134	5670	15.58	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	6.83	0.48	7.31	24.00	0.25
CH122	5610	6.75	0.48	7.23	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	6.59	0.48	7.07	24.00	0.25
CH122	5610	6.23	0.48	6.71	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	6.58	0.48	7.06	24.00	0.25
CH122	5610	6.47	0.48	6.95	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	11.92	24.00	0.25
CH122	5610	11.74	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.65	0.10	9.75	30.00	1.00
CH157	5785	9.47	0.10	9.57	30.00	1.00
CH165	5825	9.71	0.10	9.81	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.78	0.10	9.88	30.00	1.00
CH157	5785	9.91	0.10	10.01	30.00	1.00
CH165	5825	9.39	0.10	9.49	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.74	0.10	9.84	30.00	1.00
CH157	5785	9.87	0.10	9.97	30.00	1.00
CH165	5825	9.56	0.10	9.66	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.59	30.00	1.00
CH157	5785	14.63	30.00	1.00
CH165	5825	14.43	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	9.68	1.13	10.81	30.00	1.00
CH159	5795	9.57	1.13	10.70	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	9.43	1.13	10.56	30.00	1.00
CH159	5795	9.33	1.13	10.46	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	9.63	1.13	10.76	30.00	1.00
CH159	5795	9.58	1.13	10.71	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.48	30.00	1.00
CH159	5795	15.40	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	6.61	0.48	7.09	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	6.66	0.48	7.14	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	6.83	0.48	7.31	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.95	30.00	1.00

For 2TX with Beamforming

Test Mode: UNII-1/TX N20 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	5.78	0.10	5.88	28.74	0.75
CH40	5200	8.45	0.10	8.55	28.74	0.75
CH48	5240	8.62	0.10	8.72	28.74	0.75

Test Mode: UNII-1/TX N20 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	5.52	0.10	5.62	28.74	0.75
CH40	5200	8.67	0.10	8.77	28.74	0.75
CH48	5240	8.54	0.10	8.64	28.74	0.75

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.76	28.74	0.75
CH40	5200	11.67	28.74	0.75
CH48	5240	11.69	28.74	0.75

Test Mode: UNII-1/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	5.88	5.5	17.41	21.74	0.15
CH40	5200	8.55	5.5	20.56	21.74	0.15
CH48	5240	8.72	5.5	20.48	21.74	0.15

Test Mode: UNII-1/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	5.62	5.5	14.34	21.74	0.15
CH40	5200	8.77	5.5	17.53	21.74	0.15
CH48	5240	8.64	5.5	17.42	21.74	0.15

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.26	21.74	0.15
CH40	5200	17.17	21.74	0.15
CH48	5240	17.19	21.74	0.15

Test Mode: UNII-1/TX N40 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	5.41	0.32	5.73	28.74	0.75
CH46	5230	8.64	0.32	8.96	28.74	0.75

Test Mode: UNII-1/TX N40 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	5.46	0.32	5.78	28.74	0.75
CH46	5230	8.64	0.32	8.96	28.74	0.75

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.77	28.74	0.75
CH46	5230	11.97	28.74	0.75

Test Mode: UNII-1/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	5.73	5.5	11.23	21.74	0.15
CH46	5230	8.96	5.5	14.46	21.74	0.15

Test Mode: UNII-1/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	5.78	5.5	11.28	21.74	0.15
CH46	5230	8.96	5.5	14.46	21.74	0.15

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.27	21.74	0.15
CH46	5230	17.47	21.74	0.15

Test Mode: UNII-2A/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.71	0.10	8.81	22.74	0.19
CH60	5300	8.64	0.10	8.74	22.74	0.19
CH64	5320	5.62	0.10	5.72	22.74	0.19

Test Mode: UNII-2A/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.41	0.10	8.51	22.74	0.19
CH60	5300	8.62	0.10	8.72	22.74	0.19
CH64	5320	5.58	0.10	5.68	22.74	0.19

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.67	22.74	0.19
CH60	5300	11.74	22.74	0.19
CH64	5320	8.71	22.74	0.19

Test Mode: UNII-2A/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.52	0.32	8.84	22.74	0.19
CH62	5310	5.53	0.32	5.85	22.74	0.19

Test Mode: UNII-2A/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.52	0.32	8.84	22.74	0.19
CH62	5310	5.67	0.32	5.99	22.74	0.19

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.85	22.74	0.19
CH62	5310	8.93	22.74	0.19

Test Mode: UNII-2C/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	5.71	0.10	5.81	22.74	0.19
CH116	5580	8.75	0.10	8.85	22.74	0.19
CH140	5700	5.67	0.10	5.77	22.74	0.19

Test Mode: UNII-2C/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	5.61	0.10	5.71	22.74	0.19
CH116	5580	8.76	0.10	8.86	22.74	0.19
CH140	5700	5.64	0.10	5.74	22.74	0.19

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	8.77	22.74	0.19
CH116	5580	11.87	22.74	0.19
CH140	5700	8.77	22.74	0.19

Test Mode: UNII-2C/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.71	0.32	9.03	22.74	0.19
CH110	5550	8.68	0.32	9.00	22.74	0.19
CH134	5670	8.79	0.32	9.11	22.74	0.19

Test Mode: UNII-2C/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.71	0.32	9.03	22.74	0.19
CH110	5550	8.62	0.32	8.94	22.74	0.19
CH134	5670	8.82	0.32	9.14	22.74	0.19

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.04	22.74	0.19
CH110	5550	11.98	22.74	0.19
CH134	5670	12.14	22.74	0.19

Test Mode: UNII-3/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	8.63	0.10	8.73	28.74	0.75
CH157	5785	8.71	0.10	8.81	28.74	0.75
CH165	5825	8.65	0.10	8.75	28.74	0.75

Test Mode: UNII-3/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	8.71	0.10	8.81	28.74	0.75
CH157	5785	8.53	0.10	8.63	28.74	0.75
CH165	5825	8.58	0.10	8.68	28.74	0.75

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.78	28.74	0.75
CH157	5785	11.73	28.74	0.75
CH165	5825	11.73	28.74	0.75

Test Mode: UNII-3/ TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	8.46	0.32	8.78	28.74	0.75
CH159	5795	8.75	0.32	9.07	28.74	0.75

Test Mode: UNII-3/ TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	8.46	0.32	8.78	28.74	0.75
CH159	5795	8.54	0.32	8.86	28.74	0.75

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.79	28.74	0.75
CH159	5795	11.98	28.74	0.75

Test Mode: UNII-1/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	5.47	0.10	5.57	28.74	0.75
CH40	5200	8.64	0.10	8.74	28.74	0.75
CH48	5240	8.52	0.10	8.62	28.74	0.75

Test Mode: UNII-1/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	5.43	0.10	5.53	28.74	0.75
CH40	5200	8.71	0.10	8.81	28.74	0.75
CH48	5240	8.62	0.10	8.72	28.74	0.75

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.56	28.74	0.75
CH40	5200	11.79	28.74	0.75
CH48	5240	11.68	28.74	0.75

Test Mode: UNII-1/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	5.57	5.5	11.07	22.74	0.19
CH40	5200	8.74	5.5	14.24	22.74	0.19
CH48	5240	8.62	5.5	14.12	22.74	0.19

Test Mode: UNII-1/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	5.53	5.5	11.03	22.74	0.19
CH40	5200	8.81	5.5	14.31	22.74	0.19
CH48	5240	8.72	5.5	14.22	22.74	0.19

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.06	22.74	0.19
CH40	5200	17.29	22.74	0.19
CH48	5240	17.18	22.74	0.19

Test Mode: UNII-1/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	5.64	1.13	6.77	28.74	0.75
CH46	5230	8.71	1.13	9.84	28.74	0.75

Test Mode: UNII-1/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	5.46	1.13	6.59	28.74	0.75
CH46	5230	8.81	1.13	9.94	28.74	0.75

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	9.69	28.74	0.75
CH46	5230	12.90	28.74	0.75

Test Mode: UNII-1/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.77	5.5	12.27	22.74	0.19
CH46	5230	9.84	5.5	15.34	22.74	0.19

Test Mode: UNII-1/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.59	5.5	12.09	22.74	0.19
CH46	5230	9.94	5.5	15.44	22.74	0.19

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.19	22.74	0.19
CH46	5230	18.40	22.74	0.19

Test Mode: UNII-1/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	5.46	0.48	5.94	28.74	0.75

Test Mode: UNII-1/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	5.76	0.48	6.24	28.74	0.75

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.10	28.74	0.75

Test Mode: UNII-1/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	5.94	5.5	11.44	22.74	0.19

Test Mode: UNII-1/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	6.24	5.5	11.74	22.74	0.19

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.60	22.74	0.19

Test Mode: UNII-2A/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.57	0.10	8.67	22.74	0.19
CH60	5300	8.64	0.10	8.74	22.74	0.19
CH64	5320	5.41	0.10	5.51	22.74	0.19

Test Mode: UNII-2A/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.76	0.10	8.86	22.74	0.19
CH60	5300	8.64	0.10	8.74	22.74	0.19
CH64	5320	5.46	0.10	5.56	22.74	0.19

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.78	22.74	0.19
CH60	5300	11.75	22.74	0.19
CH64	5320	8.55	22.74	0.19

Test Mode: UNII-2A/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.64	1.13	9.77	22.74	0.19
CH62	5310	5.53	1.13	6.66	22.74	0.19

Test Mode: UNII-2A/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.76	1.13	9.89	22.74	0.19
CH62	5310	5.64	1.13	6.77	22.74	0.19

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	12.84	22.74	0.19
CH62	5310	9.73	22.74	0.19

Test Mode: UNII-2A/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	5.71	0.48	6.19	22.74	0.19

Test Mode: UNII-2A/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	5.71	0.48	6.19	22.74	0.19

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.20	22.74	0.19

Test Mode: UNII-2C/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	5.54	0.10	5.64	22.74	0.19
CH116	5580	8.51	0.10	8.61	22.74	0.19
CH140	5700	5.56	0.10	5.66	22.74	0.19

Test Mode: UNII-2C/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	5.54	0.10	5.64	22.74	0.19
CH116	5580	8.68	0.10	8.78	22.74	0.19
CH140	5700	5.64	0.10	5.74	22.74	0.19

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	8.65	22.74	0.19
CH116	5580	11.71	22.74	0.19
CH140	5700	8.71	22.74	0.19

Test Mode: UNII-2C/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.68	1.13	9.81	22.74	0.19
CH110	5550	8.57	1.13	9.70	22.74	0.19
CH134	5670	8.62	1.13	9.75	22.74	0.19

Test Mode: UNII-2C/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.68	1.13	9.81	22.74	0.19
CH110	5550	8.54	1.13	9.67	22.74	0.19
CH134	5670	8.61	1.13	9.74	22.74	0.19

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.82	22.74	0.19
CH110	5550	12.70	22.74	0.19
CH134	5670	12.76	22.74	0.19

Test Mode: UNII-2C/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	5.68	0.48	6.16	22.74	0.19
CH122	5610	5.48	0.48	5.96	22.74	0.19

Test Mode: UNII-2C/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	5.82	0.48	6.30	22.74	0.19
CH122	5610	5.61	0.48	6.09	22.74	0.19

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.24	22.74	0.19
CH122	5610	9.04	22.74	0.19

Test Mode: UNII-3/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	8.71	0.10	8.81	28.74	0.75
CH157	5785	8.76	0.10	8.86	28.74	0.75
CH165	5825	8.67	0.10	8.77	28.74	0.75

Test Mode: UNII-3/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	8.71	0.10	8.81	28.74	0.75
CH157	5785	8.79	0.10	8.89	28.74	0.75
CH165	5825	8.68	0.10	8.78	28.74	0.75

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.82	28.74	0.75
CH157	5785	11.89	28.74	0.75
CH165	5825	11.79	28.74	0.75

Test Mode: UNII-3/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	8.64	1.13	9.77	28.74	0.75
CH159	5795	8.71	1.13	9.84	28.74	0.75

Test Mode: UNII-3/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	8.47	1.13	9.60	28.74	0.75
CH159	5795	8.52	1.13	9.65	28.74	0.75

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	12.70	28.74	0.75
CH159	5795	12.76	28.74	0.75

Test Mode: UNII-3/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	5.67	0.48	6.15	28.74	0.75

Test Mode: UNII-3/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	5.67	0.48	6.15	28.74	0.75

Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	9.16	28.74	0.75

For 3TX with Beamforming

Test Mode: UNII-1/TX N20 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.47	0.10	3.57	30.00	1.00
CH40	5200	6.52	0.10	6.62	30.00	1.00
CH48	5240	6.58	0.10	6.68	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.56	0.10	3.66	30.00	1.00
CH40	5200	6.68	0.10	6.78	30.00	1.00
CH48	5240	6.71	0.10	6.81	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.69	0.10	3.79	30.00	1.00
CH40	5200	6.58	0.10	6.68	30.00	1.00
CH48	5240	6.61	0.10	6.71	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.45	30.00	1.00
CH40	5200	11.47	30.00	1.00
CH48	5240	11.50	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.57	5.5	9.07	23.00	0.20
CH40	5200	6.62	5.5	12.12	23.00	0.20
CH48	5240	6.68	5.5	12.18	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.66	5.5	9.16	23.00	0.20
CH40	5200	6.78	5.5	12.28	23.00	0.20
CH48	5240	6.81	5.5	12.31	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_ANT C

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.79	5.5	9.9	23.00	0.20
CH40	5200	6.68	5.5	12.18	23.00	0.20
CH48	5240	6.71	5.5	12.21	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.95	23.00	0.20
CH40	5200	16.97	23.00	0.20
CH48	5240	17.00	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	3.49	0.32	3.81	30.00	1.00
CH46	5230	6.67	0.32	6.99	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	3.64	0.32	3.96	30.00	1.00
CH46	5230	6.71	0.32	7.03	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	3.75	0.32	4.07	30.00	1.00
CH46	5230	6.64	0.32	6.96	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	8.72	30.00	1.00
CH46	5230	11.76	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	3.81	5.5	9.31	23.00	0.20
CH46	5230	6.99	5.5	12.49	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	3.96	5.5	9.46	23.00	0.20
CH46	5230	7.03	5.5	12.53	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT C

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	4.07	5.5	9.57	23.00	0.20
CH46	5230	6.96	5.5	12.46	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.22	23.00	0.20
CH46	5230	17.26	23.00	0.20

Test Mode: UNII-2A/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	6.61	0.10	6.71	24.00	0.25
CH60	5300	6.54	0.10	6.64	24.00	0.25
CH64	5320	3.71	0.10	3.81	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	6.74	0.10	6.84	24.00	0.25
CH60	5300	6.81	0.10	6.91	24.00	0.25
CH64	5320	3.62	0.10	3.72	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	6.65	0.10	6.75	24.00	0.25
CH60	5300	6.57	0.10	6.67	24.00	0.25
CH64	5320	3.59	0.10	3.69	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.54	24.00	0.25
CH60	5300	11.51	24.00	0.25
CH64	5320	8.51	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	6.61	0.32	6.93	24.00	0.25
CH62	5310	3.52	0.32	3.84	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	6.68	0.32	7.00	24.00	0.25
CH62	5310	3.62	0.32	3.94	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	6.69	0.32	7.01	24.00	0.25
CH62	5310	3.82	0.32	4.14	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.75	24.00	0.25
CH62	5310	8.75	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	3.62	0.10	3.72	24.00	0.25
CH116	5580	6.71	0.10	6.81	24.00	0.25
CH140	5700	3.65	0.10	3.75	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	3.74	0.10	3.84	24.00	0.25
CH116	5580	6.61	0.10	6.71	24.00	0.25
CH140	5700	3.48	0.10	3.58	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	3.67	0.10	3.77	24.00	0.25
CH116	5580	6.61	0.10	6.71	24.00	0.25
CH140	5700	3.64	0.10	3.74	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	8.55	24.00	0.25
CH116	5580	11.51	24.00	0.25
CH140	5700	8.46	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	6.74	0.32	7.06	24.00	0.25
CH110	5550	6.78	0.32	7.10	24.00	0.25
CH134	5670	6.67	0.32	6.99	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	6.87	0.32	7.19	24.00	0.25
CH110	5550	6.78	0.32	7.10	24.00	0.25
CH134	5670	6.71	0.32	7.03	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	6.73	0.32	7.05	24.00	0.25
CH110	5550	6.65	0.32	6.97	24.00	0.25
CH134	5670	6.58	0.32	6.90	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.87	24.00	0.25
CH110	5550	11.83	24.00	0.25
CH134	5670	11.74	24.00	0.25

Test Mode: UNII-3/TX N20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	6.58	0.10	6.68	30.00	1.00
CH157	5785	6.74	0.10	6.84	30.00	1.00
CH165	5825	6.71	0.10	6.81	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	6.77	0.10	6.87	30.00	1.00
CH157	5785	6.85	0.10	6.95	30.00	1.00
CH165	5825	6.76	0.10	6.86	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	6.72	0.10	6.82	30.00	1.00
CH157	5785	6.86	0.10	6.96	30.00	1.00
CH165	5825	6.81	0.10	6.91	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.56	30.00	1.00
CH157	5785	11.69	30.00	1.00
CH165	5825	11.63	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	6.59	0.32	6.91	30.00	1.00
CH159	5795	6.69	0.32	7.01	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	6.64	0.32	6.96	30.00	1.00
CH159	5795	6.68	0.32	7.00	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	6.79	0.32	7.11	30.00	1.00
CH159	5795	6.67	0.32	6.99	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.77	30.00	1.00
CH159	5795	11.77	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.56	0.10	3.66	30.00	1.00
CH40	5200	6.79	0.10	6.89	30.00	1.00
CH48	5240	6.71	0.10	6.81	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.65	0.10	3.75	30.00	1.00
CH40	5200	6.76	0.10	6.86	30.00	1.00
CH48	5240	6.58	0.10	6.68	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.63	0.10	3.73	30.00	1.00
CH40	5200	6.64	0.10	6.74	30.00	1.00
CH48	5240	6.87	0.10	6.97	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	8.48	30.00	1.00
CH40	5200	11.60	30.00	1.00
CH48	5240	11.59	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.66	5.5	9.16	23.00	0.20
CH40	5200	6.89	5.5	12.39	23.00	0.20
CH48	5240	6.81	5.5	12.31	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.75	5.5	9.25	23.00	0.20
CH40	5200	6.86	5.5	12.36	23.00	0.20
CH48	5240	6.68	5.5	12.18	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_ANT C

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	3.73	5.5	9.23	23.00	0.20
CH40	5200	6.74	5.5	12.24	23.00	0.20
CH48	5240	6.97	5.5	12.47	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.98	23.00	0.20
CH40	5200	17.10	23.00	0.20
CH48	5240	17.09	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	3.67	1.13	4.80	30.00	1.00
CH46	5230	6.79	1.13	7.92	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	3.46	1.13	4.59	30.00	1.00
CH46	5230	6.71	1.13	7.84	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	3.47	1.13	4.60	30.00	1.00
CH46	5230	6.67	1.13	7.80	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	9.44	30.00	1.00
CH46	5230	12.62	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	4.80	5.5	10.30	23.00	0.20
CH46	5230	7.92	5.5	13.42	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	4.59	5.5	10.09	23.00	0.20
CH46	5230	7.84	5.5	13.34	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT C

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	4.60	5.5	10.10	23.00	0.20
CH46	5230	7.80	5.5	13.30	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.94	23.00	0.20
CH46	5230	18.12	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	3.74	0.48	4.22	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	3.74	0.48	4.22	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT C

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Duty Factor (dBm)	FCC Part 15E Conducted Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	3.41	0.48	3.89	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	FCC Part 15E Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	8.88	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	4.22	5.5	9.72	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	4.22	5.5	9.72	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Conducted Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	3.89	5.5	9.39	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	RSS-247 E.I.R.P Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.38	23.00	0.20

Test Mode: UNII-2A/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	6.58	0.10	6.68	24.00	0.25
CH60	5300	6.72	0.10	6.82	24.00	0.25
CH64	5320	3.65	0.10	3.75	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	6.62	0.10	6.72	24.00	0.25
CH60	5300	6.71	0.10	6.81	24.00	0.25
CH64	5320	3.84	0.10	3.94	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	6.71	0.10	6.81	24.00	0.25
CH60	5300	6.58	0.10	6.68	24.00	0.25
CH64	5320	6.64	0.10	6.74	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.51	24.00	0.25
CH60	5300	11.54	24.00	0.25
CH64	5320	9.81	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	6.81	1.13	7.94	24.00	0.25
CH62	5310	3.47	1.13	4.60	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	6.58	1.13	7.71	24.00	0.25
CH62	5310	3.76	1.13	4.89	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	6.62	1.13	7.75	24.00	0.25
CH62	5310	3.74	1.13	4.87	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	12.57	24.00	0.25
CH62	5310	9.56	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	3.68	0.48	4.16	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	3.82	0.48	4.30	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	3.52	0.48	4.00	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	8.93	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	3.71	0.10	3.81	24.00	0.25
CH116	5580	6.79	0.10	6.89	24.00	0.25
CH140	5700	3.62	0.10	3.72	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	3.65	0.10	3.75	24.00	0.25
CH116	5580	6.71	0.10	6.81	24.00	0.25
CH140	5700	3.62	0.10	3.72	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.53	0.10	6.63	24.00	0.25
CH116	5580	6.48	0.10	6.58	24.00	0.25
CH140	5700	3.67	0.10	3.77	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	9.72	24.00	0.25
CH116	5580	11.53	24.00	0.25
CH140	5700	8.51	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	6.58	1.13	7.71	24.00	0.25
CH110	5550	6.76	1.13	7.89	24.00	0.25
CH134	5670	6.57	1.13	7.70	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	6.52	1.13	7.65	24.00	0.25
CH110	5550	6.48	1.13	7.61	24.00	0.25
CH134	5670	6.71	1.13	7.84	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	6.41	1.13	7.54	24.00	0.25
CH110	5550	6.54	1.13	7.67	24.00	0.25
CH134	5670	6.57	1.13	7.70	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.41	24.00	0.25
CH110	5550	12.50	24.00	0.25
CH134	5670	12.52	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	3.72	0.48	4.20	24.00	0.25
CH122	5610	3.61	0.48	4.09	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	3.79	0.48	4.27	24.00	0.25
CH122	5610	3.71	0.48	4.19	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	3.67	0.48	4.15	24.00	0.25
CH122	5610	3.81	0.48	4.29	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	8.98	24.00	0.25
CH122	5610	8.96	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	6.58	0.10	6.68	30.00	1.00
CH157	5785	6.67	0.10	6.77	30.00	1.00
CH165	5825	6.78	0.10	6.88	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	6.82	0.10	6.92	30.00	1.00
CH157	5785	6.76	0.10	6.86	30.00	1.00
CH165	5825	6.72	0.10	6.82	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	6.71	0.10	6.81	30.00	1.00
CH157	5785	6.57	0.10	6.67	30.00	1.00
CH165	5825	6.52	0.10	6.62	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.58	30.00	1.00
CH157	5785	11.54	30.00	1.00
CH165	5825	11.55	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	6.61	1.13	7.74	30.00	1.00
CH159	5795	6.52	1.13	7.65	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	6.54	1.13	7.67	30.00	1.00
CH159	5795	6.63	1.13	7.76	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	6.47	1.13	7.60	30.00	1.00
CH159	5795	6.52	1.13	7.65	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	12.44	30.00	1.00
CH159	5795	12.46	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT A

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	3.56	0.48	4.04	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT B

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	3.58	0.48	4.06	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT C

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	3.78	0.48	4.26	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_Total


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	8.89	30.00	1.00

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION

For 1TX


Test Mode: UNII-1/TX A Mode

TX mode CH36

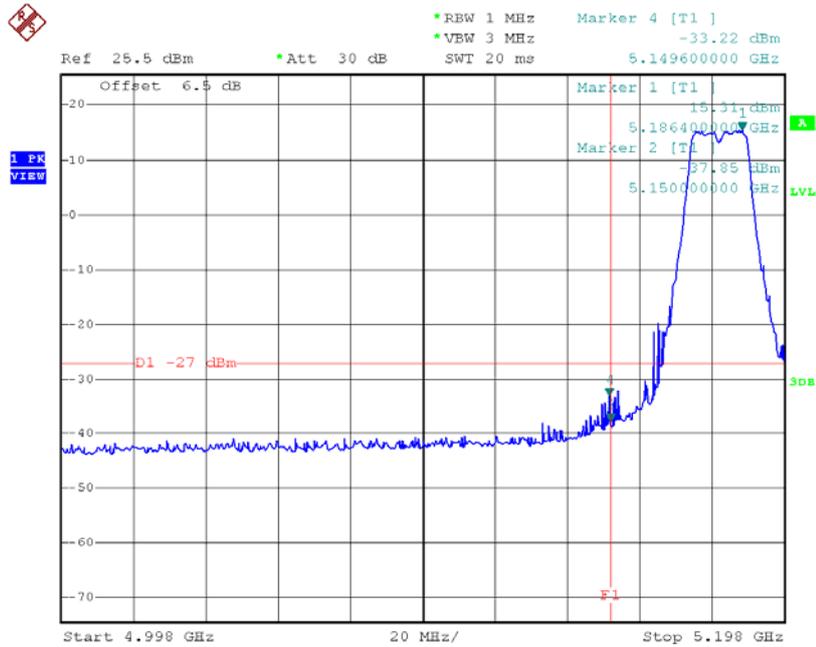

Date: 23.JUL.2015 11:56:09


TX mode CH48

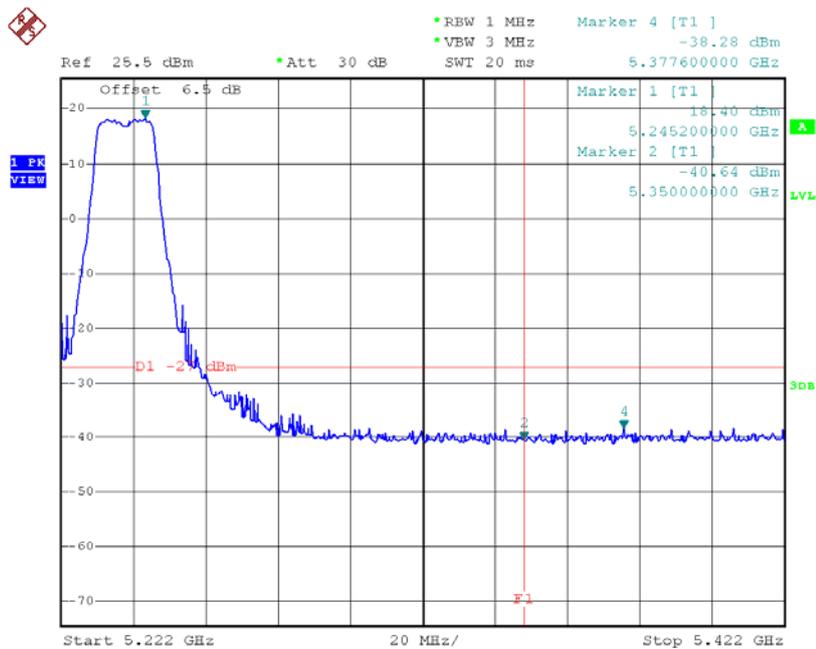

Date: 23.JUL.2015 12:01:25


Test Mode: UNII-1/TX N20 Mode

TX mode CH36

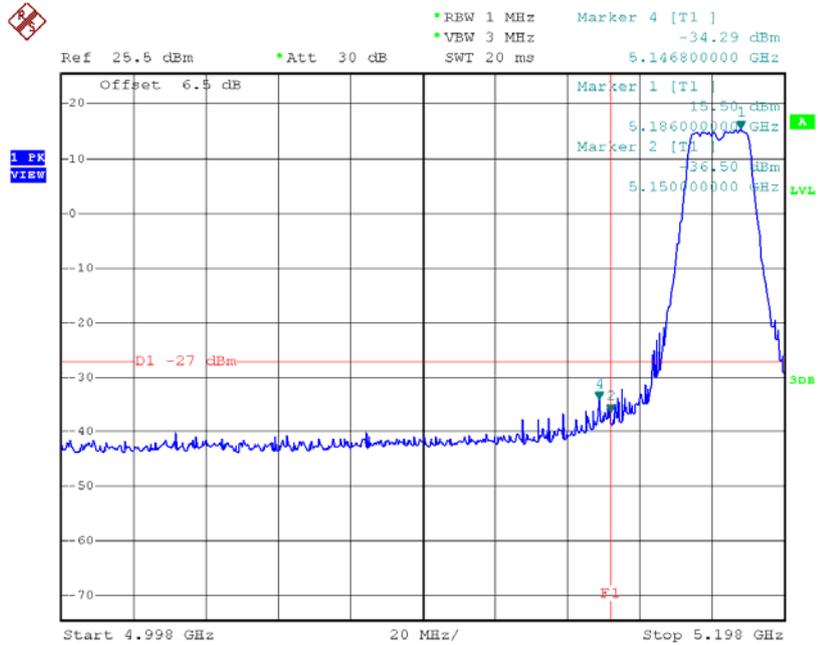

Date: 23.JUL.2015 12:22:00


TX mode CH48

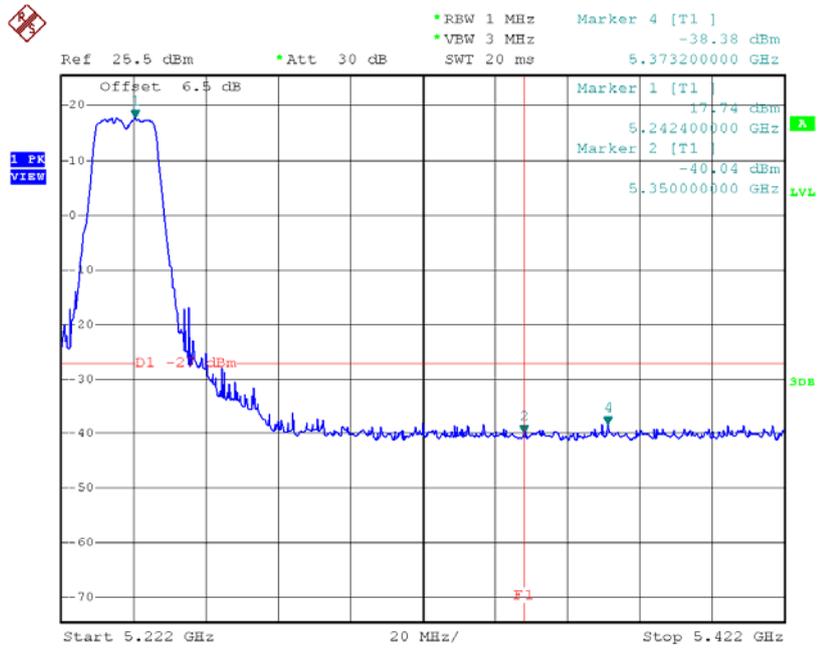

Date: 23.JUL.2015 12:24:47


Test Mode: UNII-1/TX N40 Mode

TX mode CH38

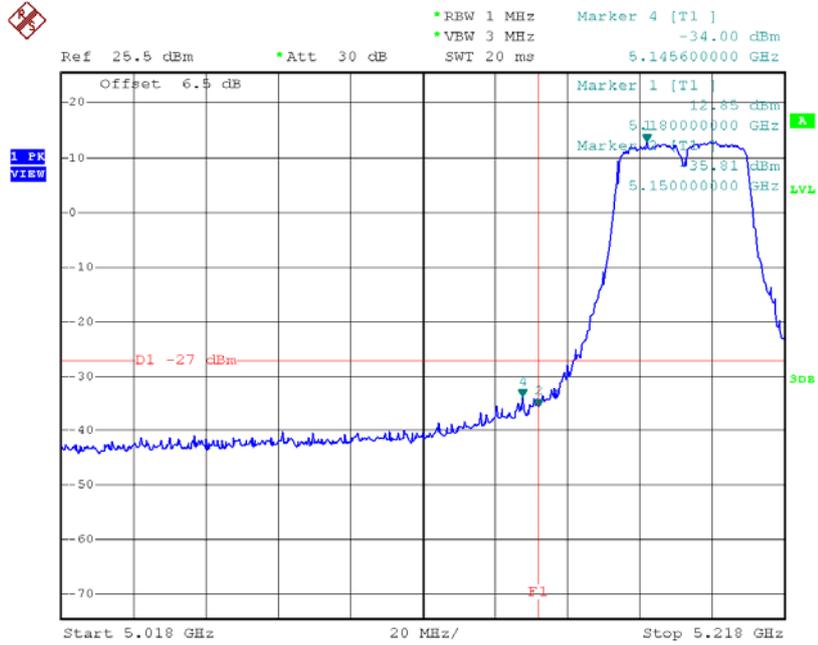

Date: 23.JUL.2015 14:32:38


TX mode CH46

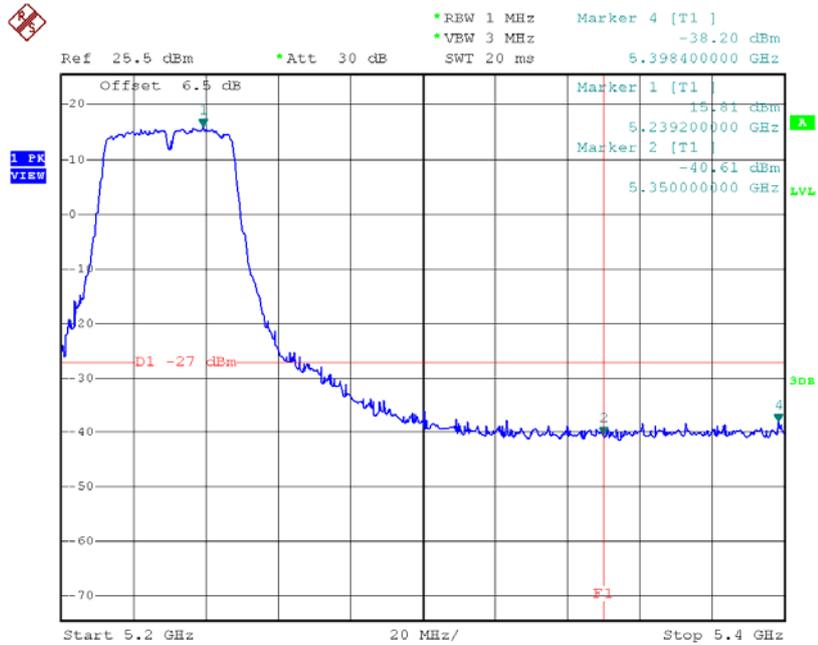

Date: 23.JUL.2015 14:34:18


Test Mode: UNII-2A/TX A Mode

TX mode CH52

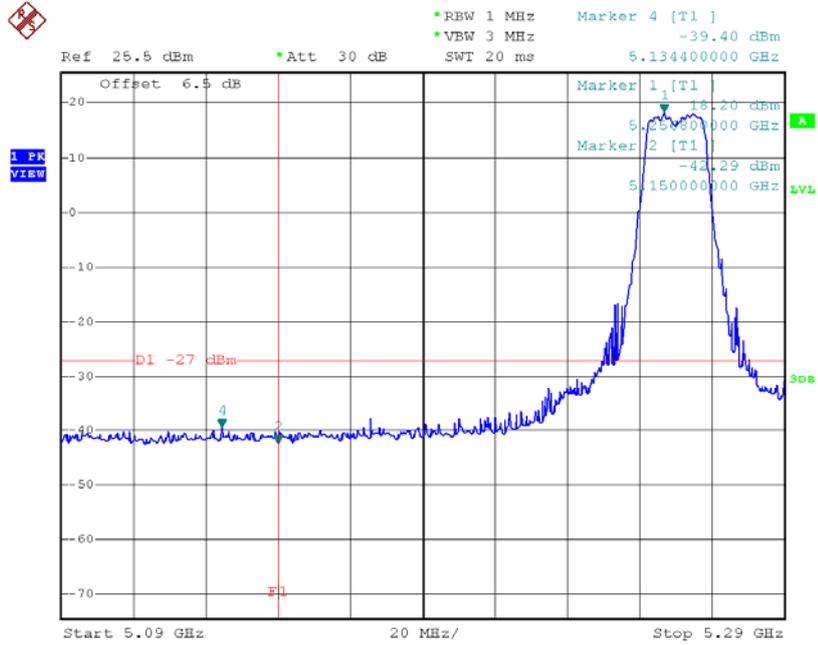

Date: 23.JUL.2015 12:03:51


TX mode CH64

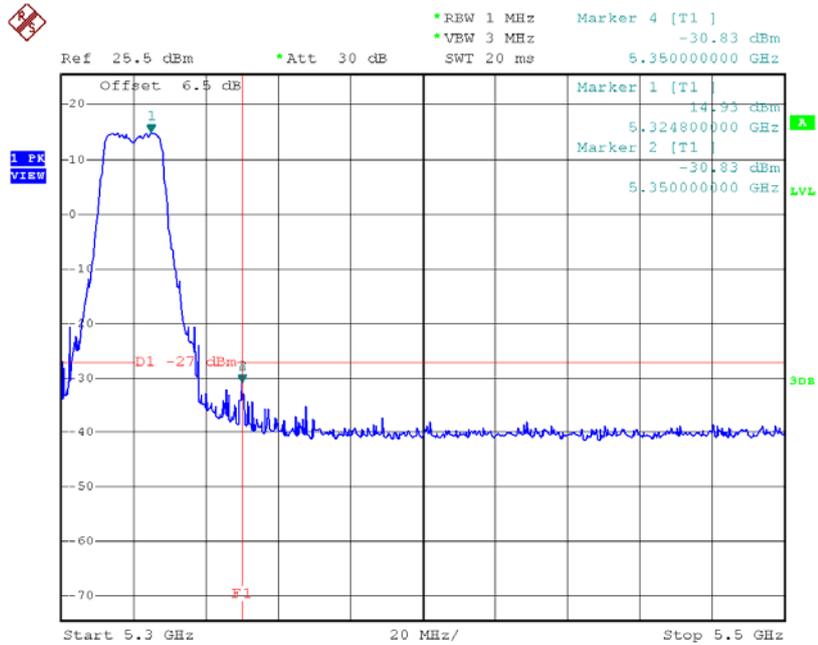

Date: 23.JUL.2015 12:07:02


Test Mode: UNII-2A/TX N20 Mode

TX mode CH52

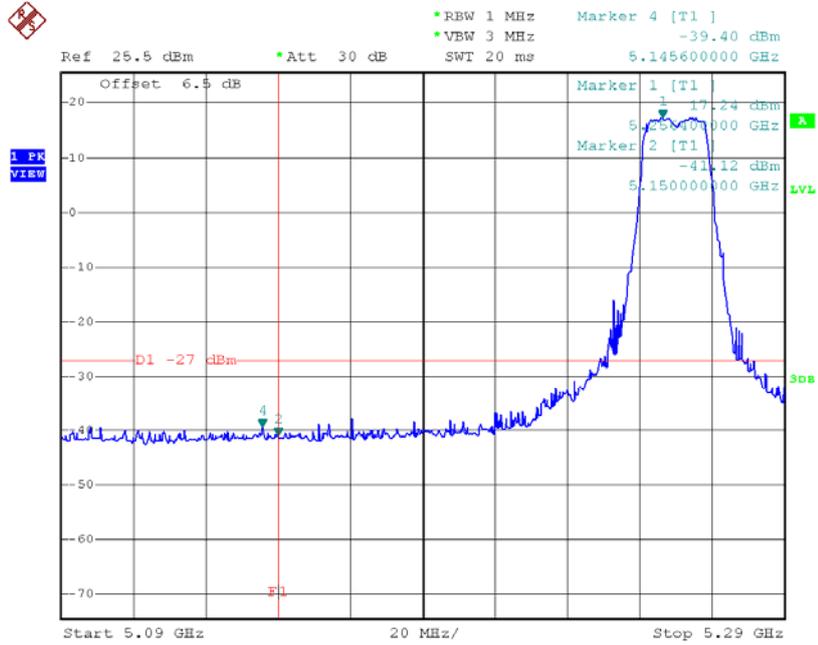

Date: 23.JUL.2015 12:25:49


TX mode CH64

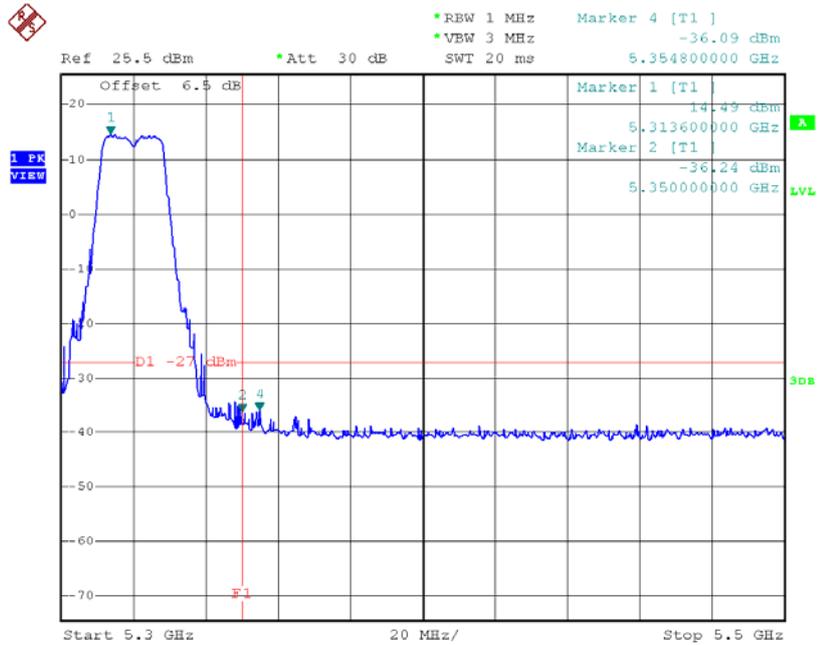

Date: 23.JUL.2015 14:03:30


Test Mode: UNII-2A/TX N40 Mode

TX mode CH54

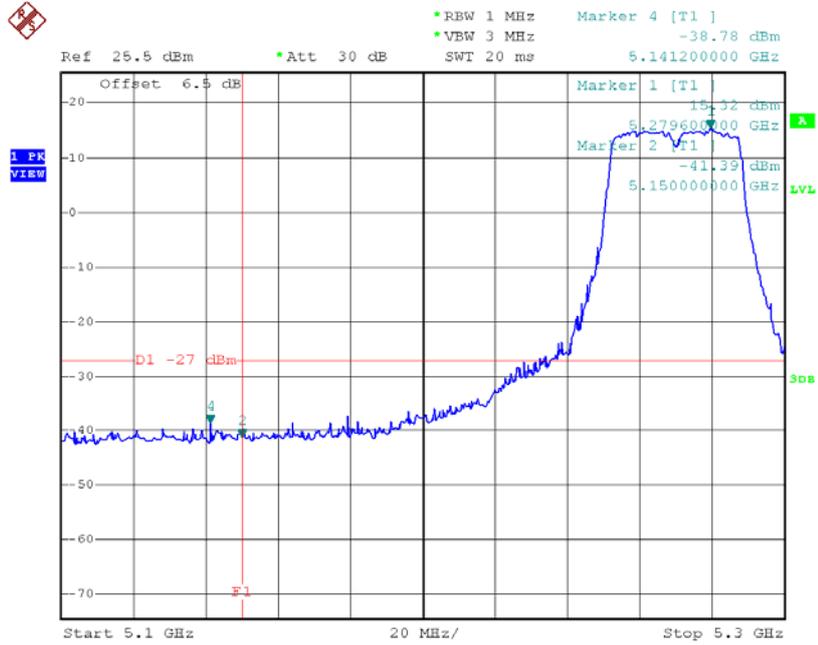

Date: 23.JUL.2015 14:35:26


TX mode CH62

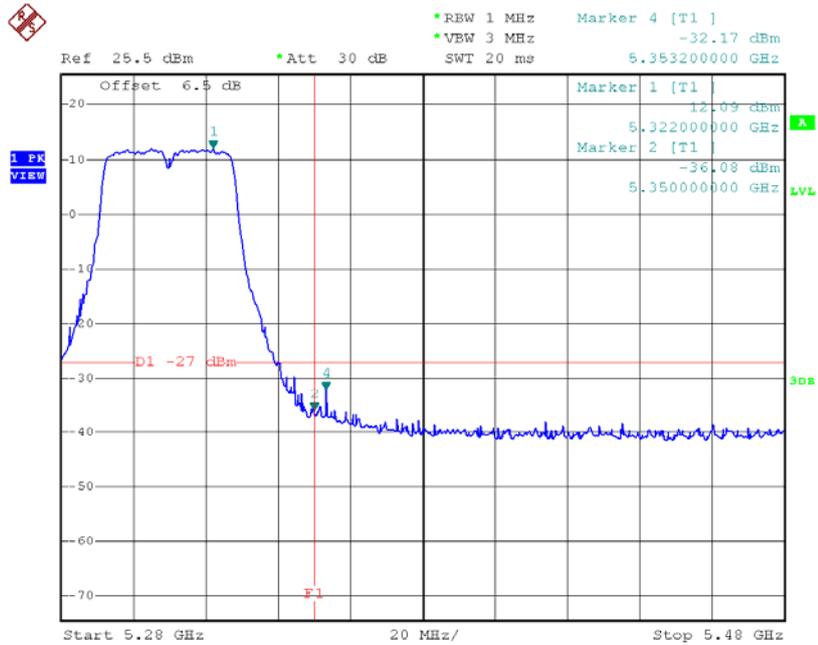

Date: 23.JUL.2015 14:36:47


Test Mode: UNII-2C/TX A Mode

TX mode CH100

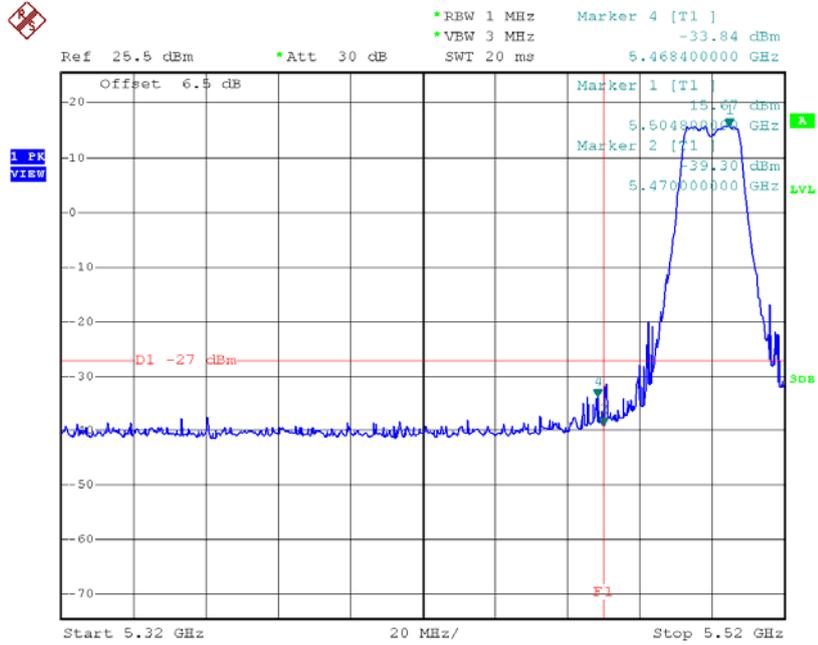

Date: 23.JUL.2015 12:08:41


TX mode CH140

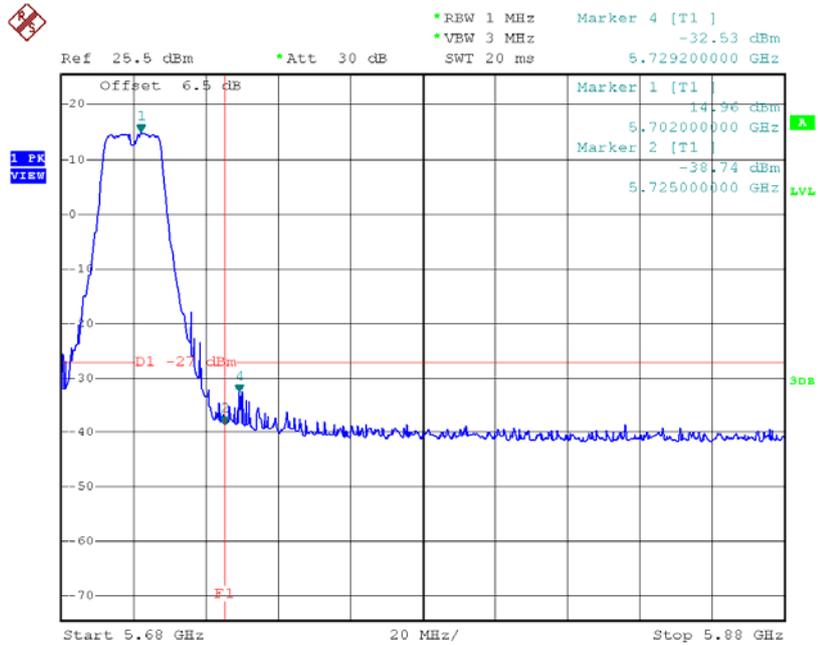

Date: 23.JUL.2015 12:11:41


Test Mode: UNII-2C/TX N20 Mode

TX mode CH100

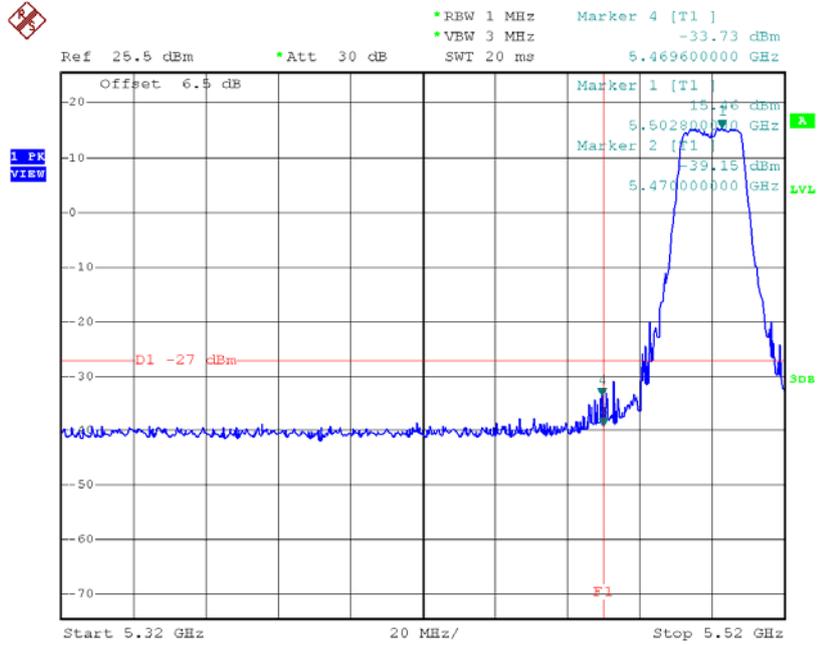

Date: 23.JUL.2015 14:04:28


TX mode CH140

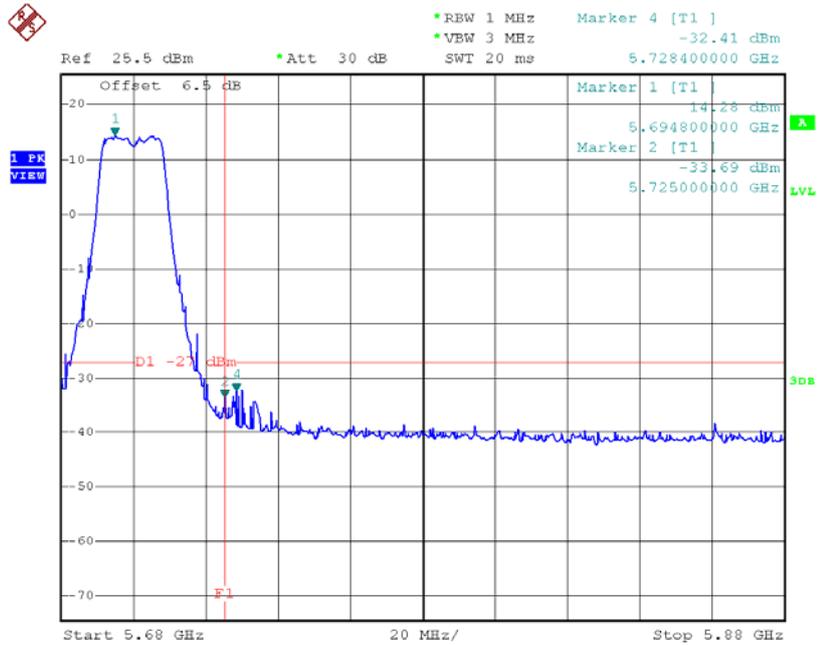

Date: 23.JUL.2015 14:06:31


Test Mode: UNII-2C/TX N40 Mode

TX mode CH102

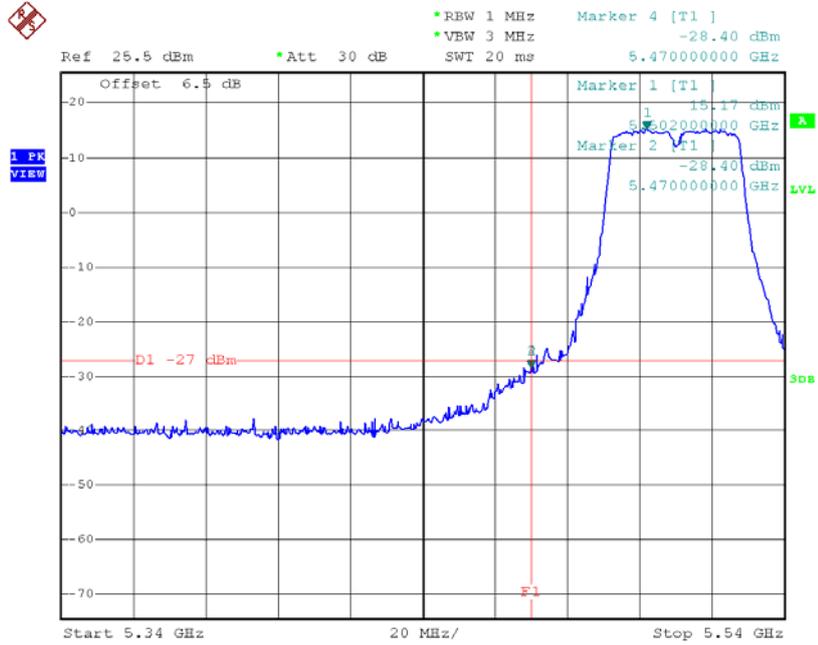

Date: 23.JUL.2015 14:38:34


TX mode CH134

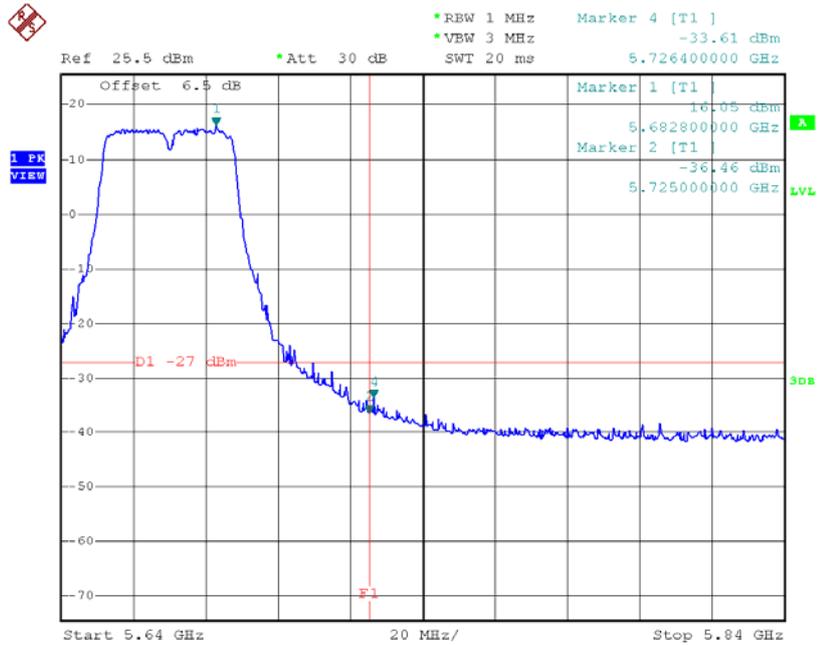

Date: 23.JUL.2015 14:41:19


Test Mode: UNII-3/TX A Mode

TX A Mode CH149

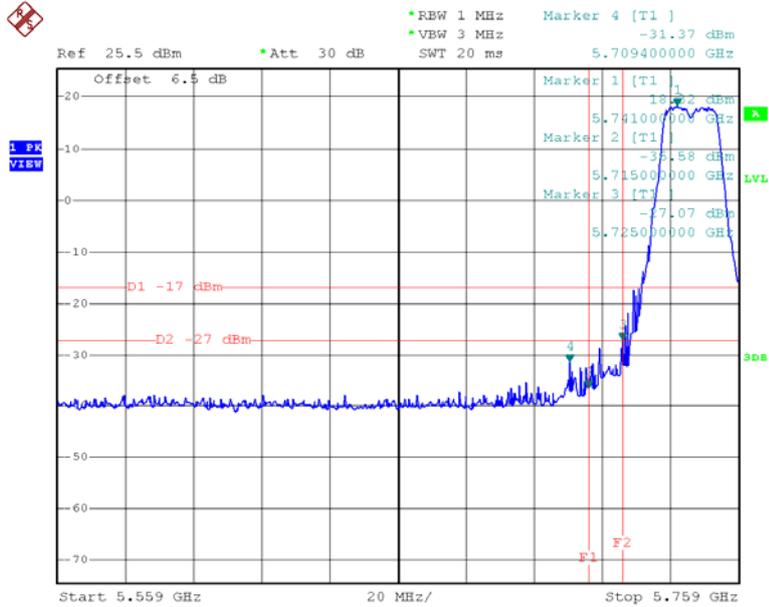

Date: 23.JUL.2015 12:13:31


TX A Mode CH165

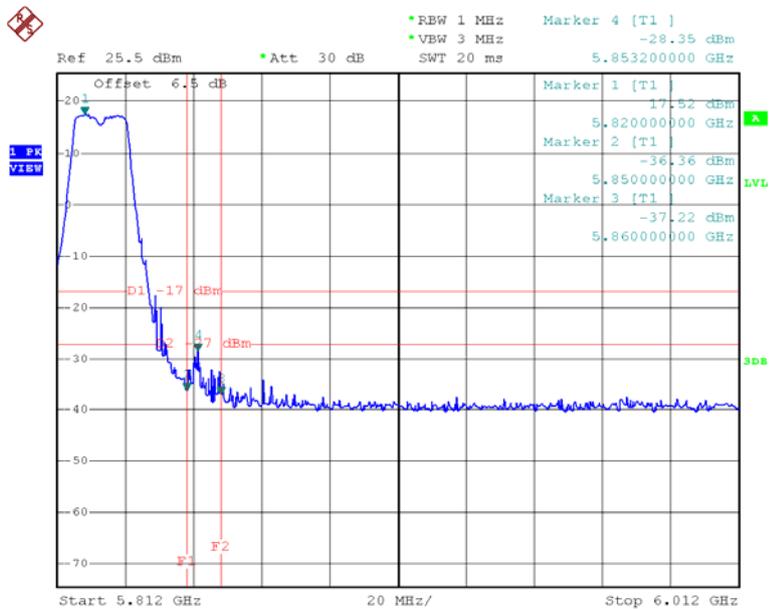

Date: 23.JUL.2015 12:17:15


Test Mode: UNII-3/TX N20 Mode

TX HT20 mode CH149

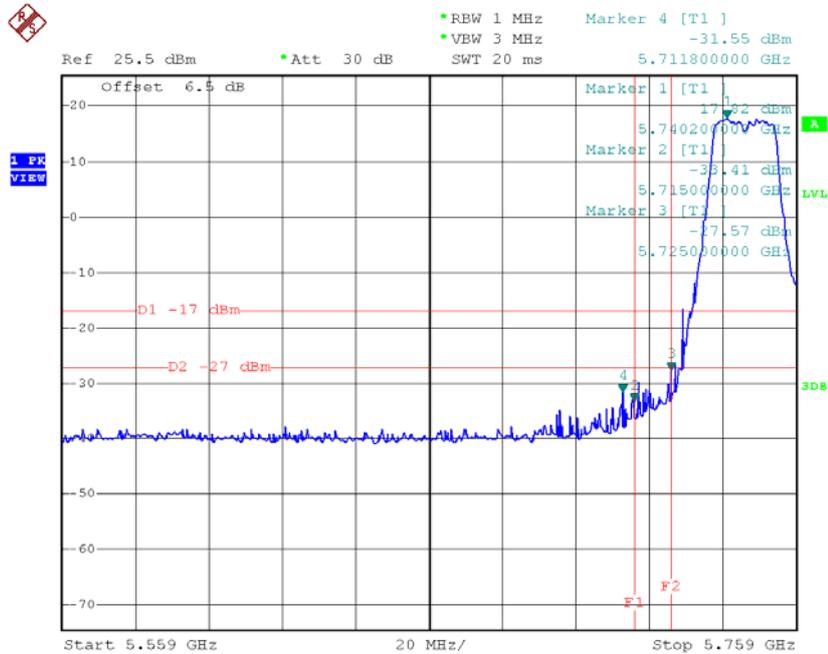

Date: 23.JUL.2015 14:07:40


TX HT20 mode CH165

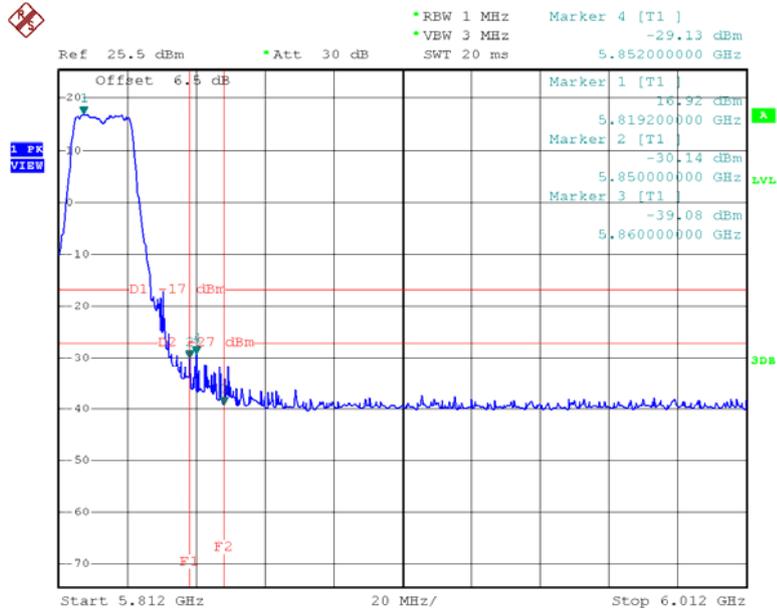

Date: 23.JUL.2015 14:09:35


Test Mode: UNII-3/TX N40 Mode

UNII-3/TX HT40 mode CH151

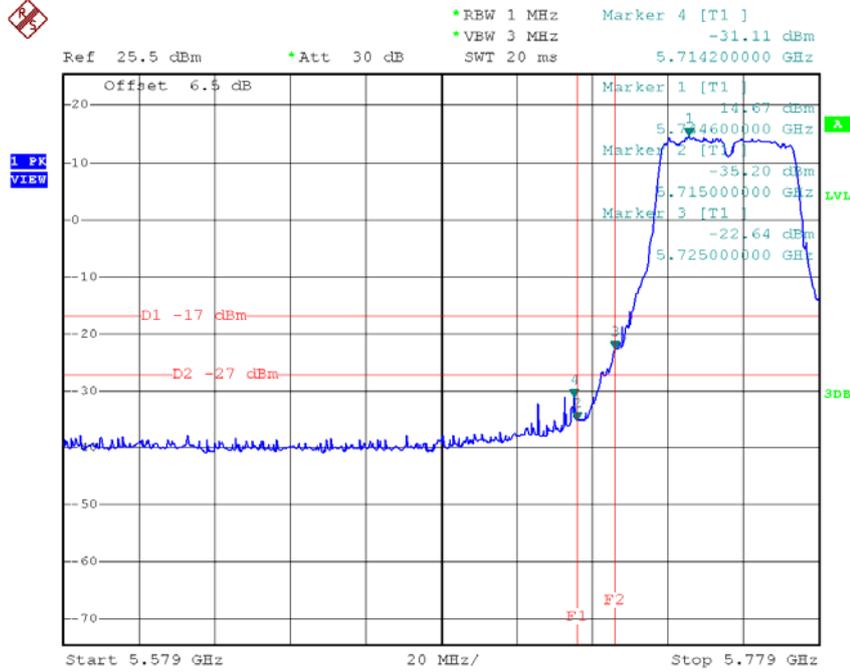

Date: 23.JUL.2015 14:42:57


UNII-3/TX HT40 mode CH159

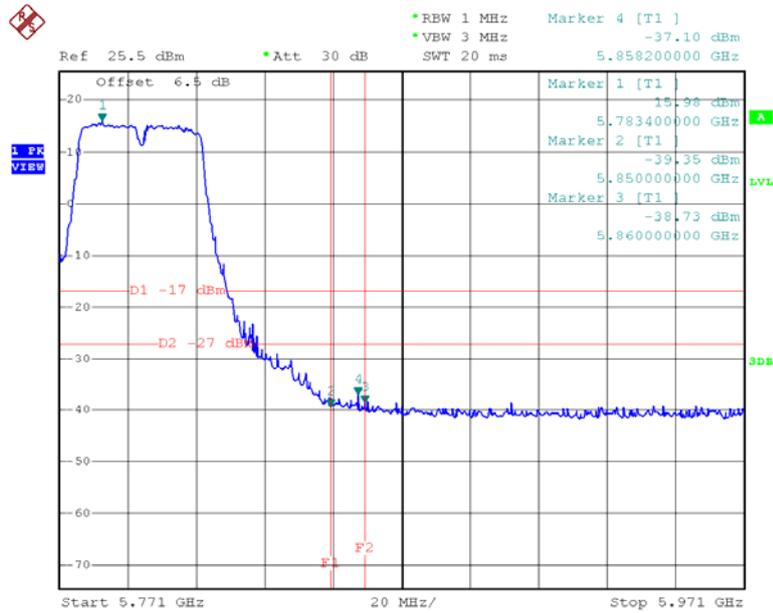

Date: 23.JUL.2015 14:44:27


Test Mode: UNII-1/TX AC20 Mode

TX mode CH36

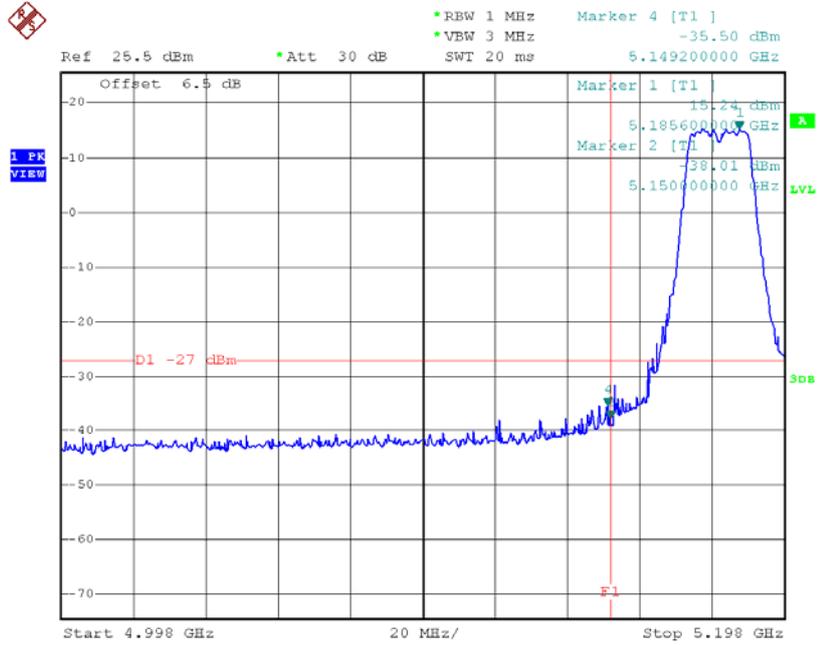

Date: 23.JUL.2015 14:12:16


TX mode CH48

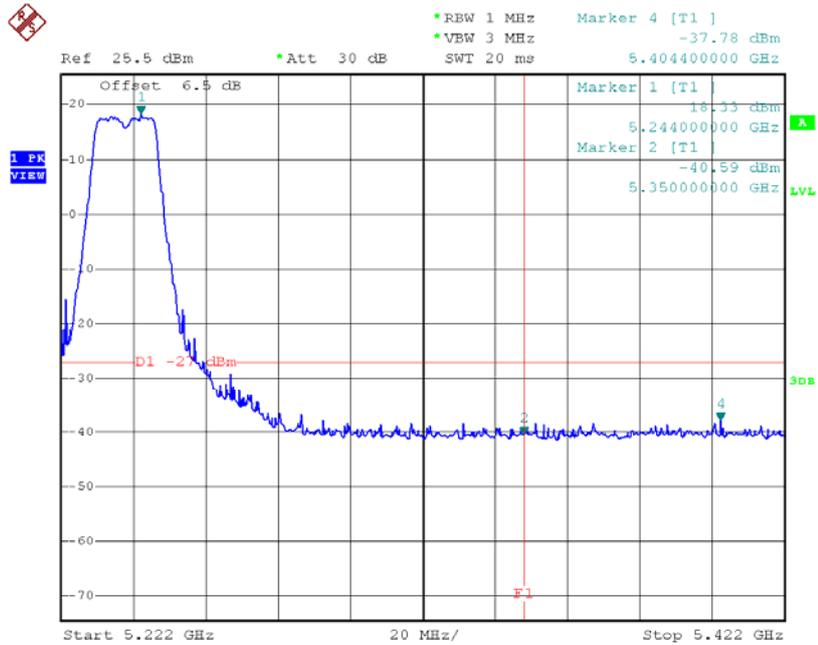

Date: 23.JUL.2015 14:14:42


Test Mode: UNII-1/TX AC40 Mode

TX mode CH38

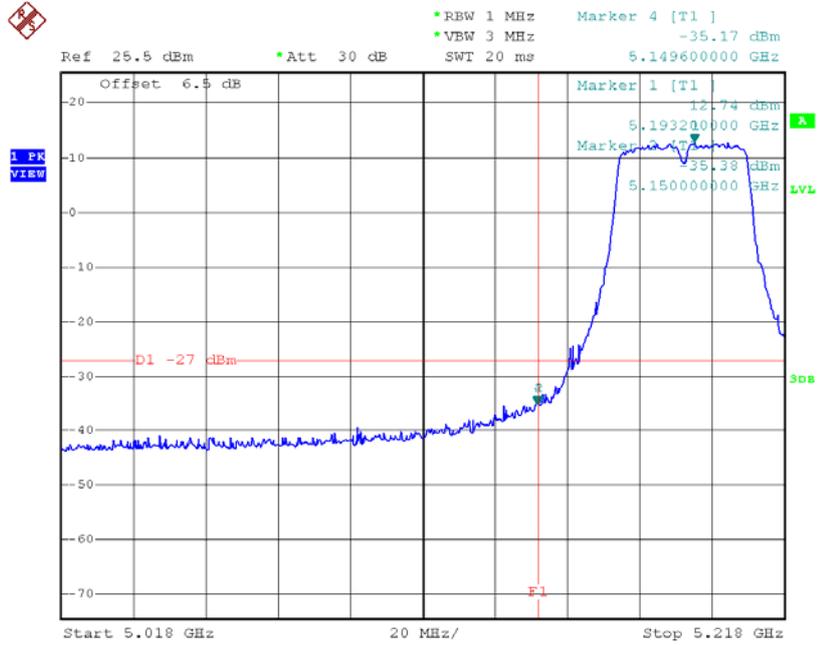

Date: 23.JUL.2015 14:47:45


TX mode CH46

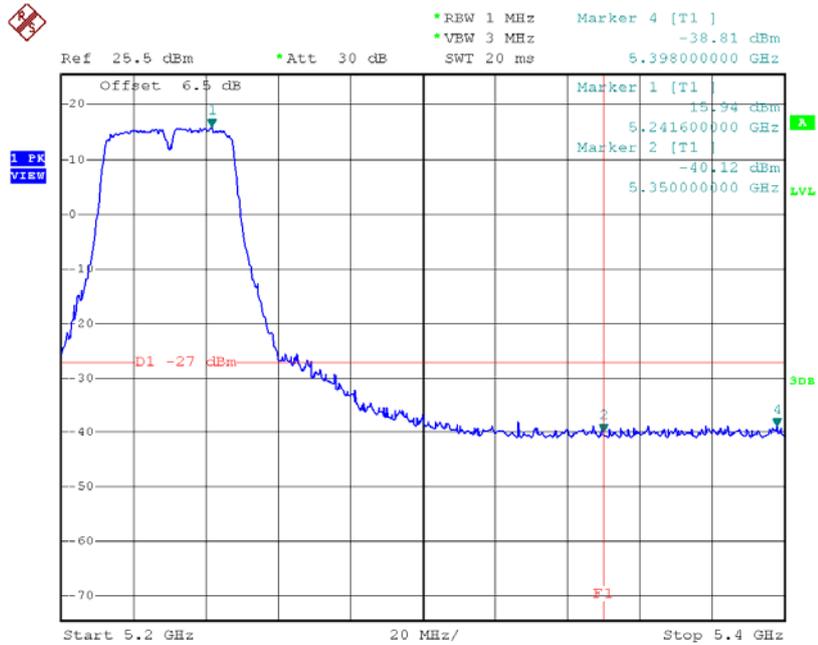


Date: 23.JUL.2015 14:49:50

Test Mode: UNII-1/TX AC80 Mode

TX mode CH42

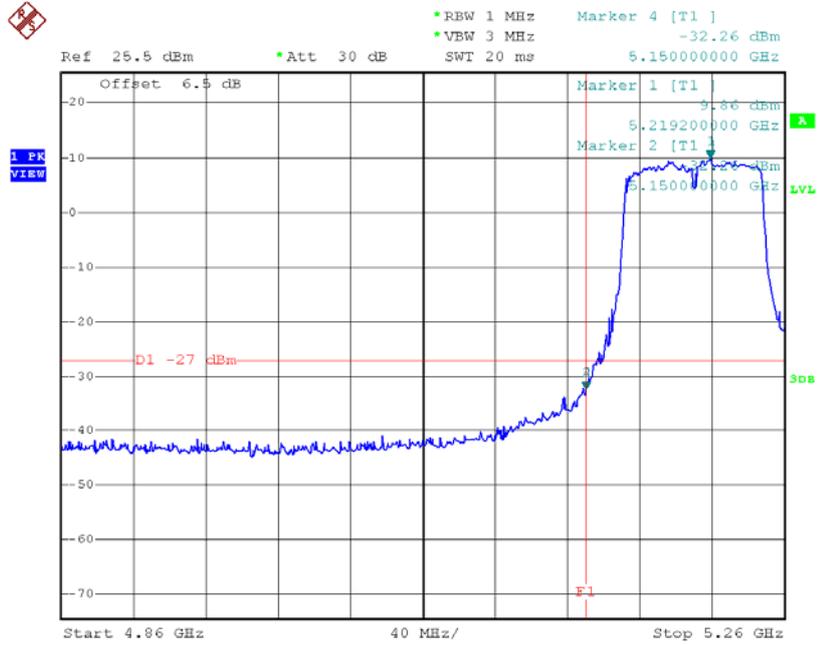


Date: 23.JUL.2015 15:09:43

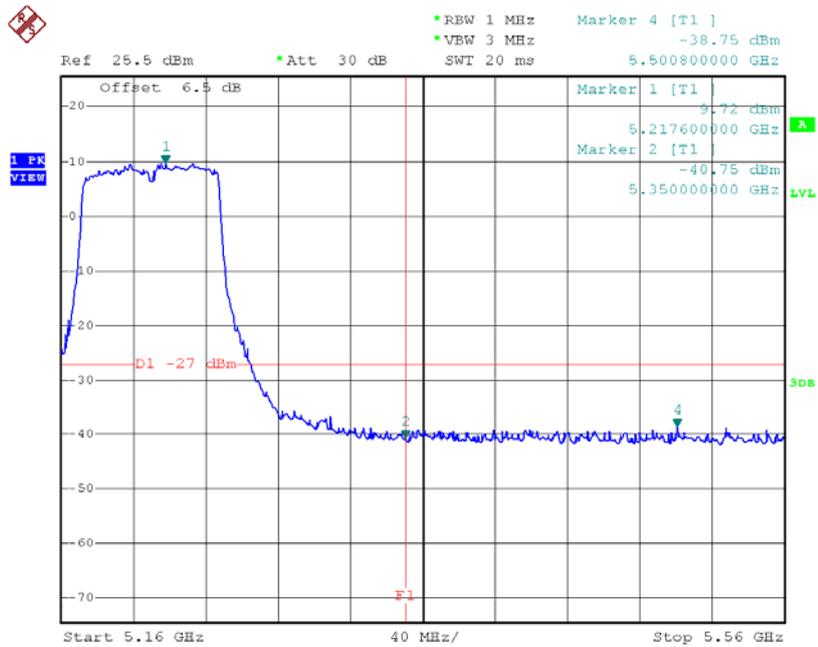

Date: 23.JUL.2015 15:09:51


Test Mode: UNII-2A/TX AC20 Mode

TX mode CH52

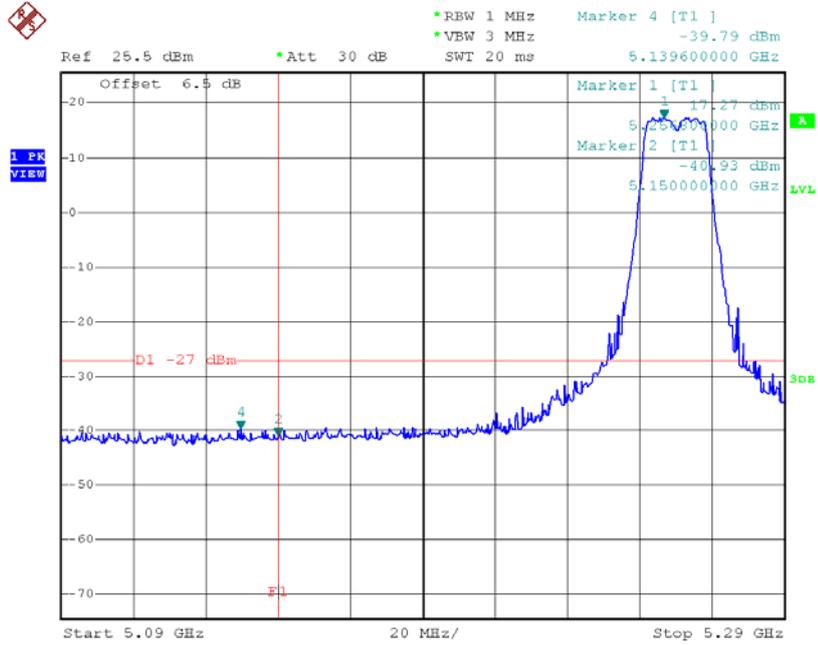

Date: 23.JUL.2015 14:15:50


TX mode CH64

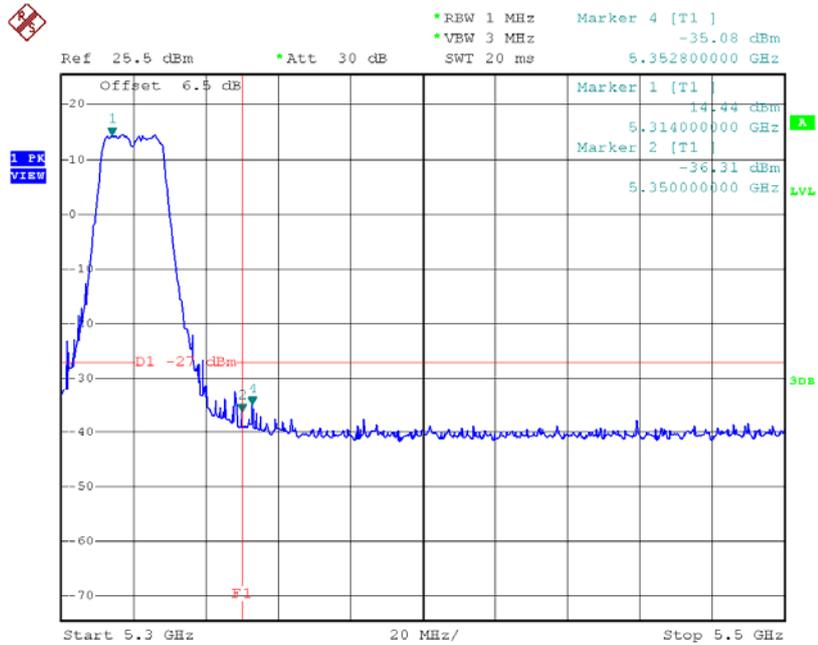

Date: 23.JUL.2015 14:18:43


Test Mode: UNII-2A/TX AC40 Mode

TX mode CH54

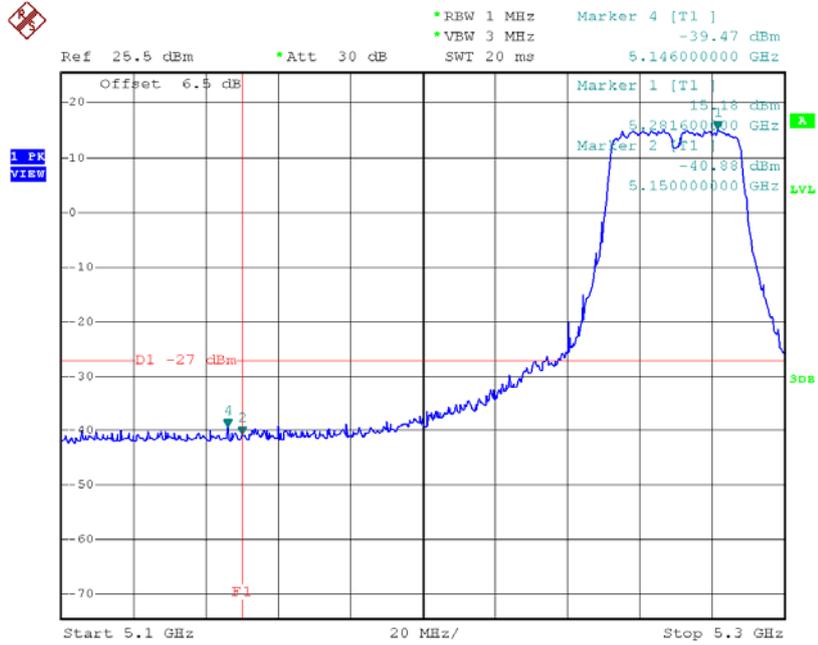

Date: 23.JUL.2015 14:51:20


TX mode CH62

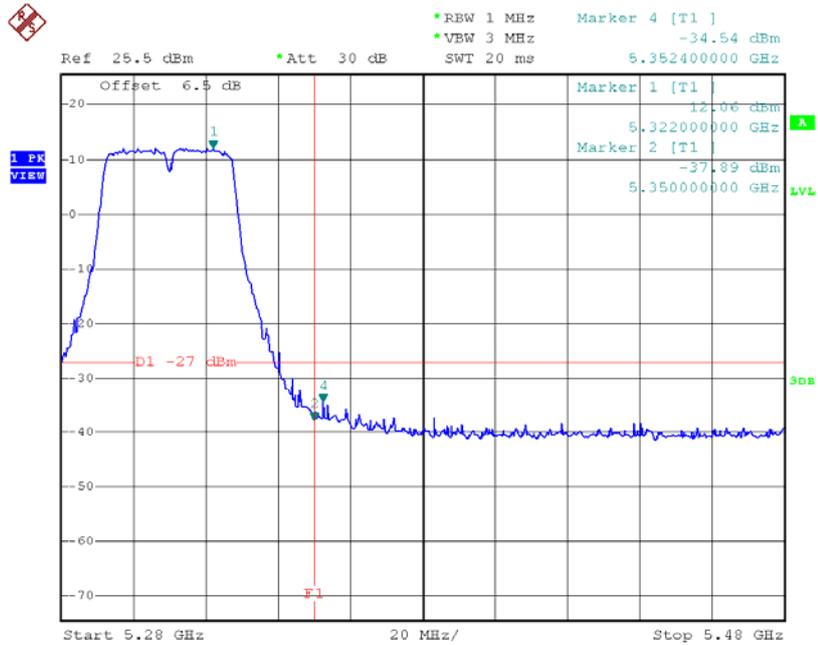


Date: 23.JUL.2015 14:52:36

Test Mode: UNII-2A/TX AC80 Mode

TX mode CH58

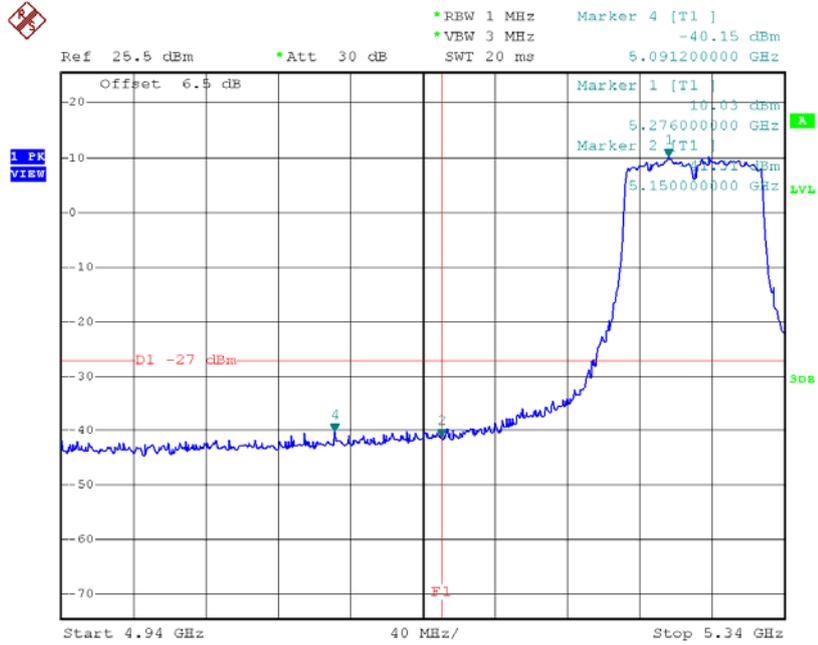


Date: 23.JUL.2015 15:11:55

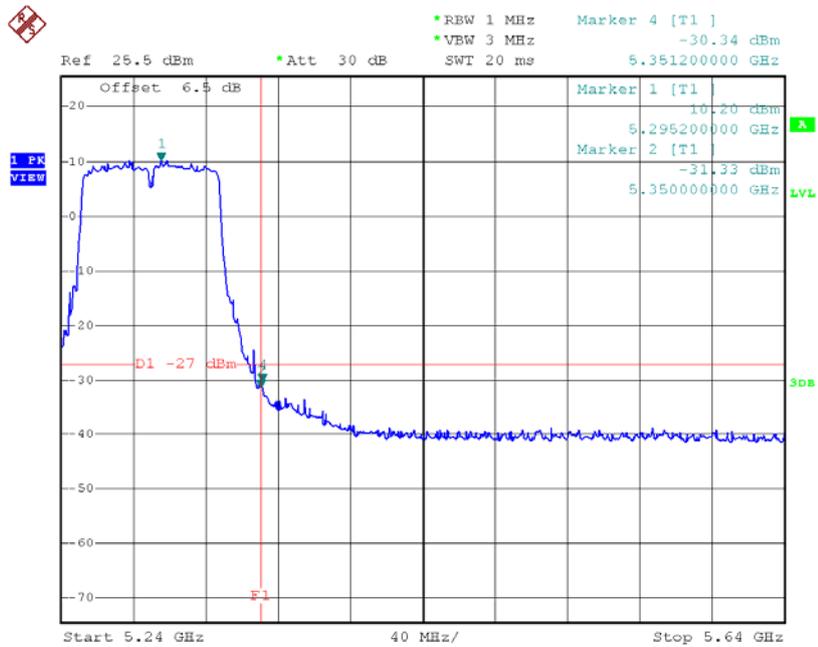

Date: 23.JUL.2015 15:12:03


Test Mode: UNII-2C/TX AC20 Mode

TX mode CH100

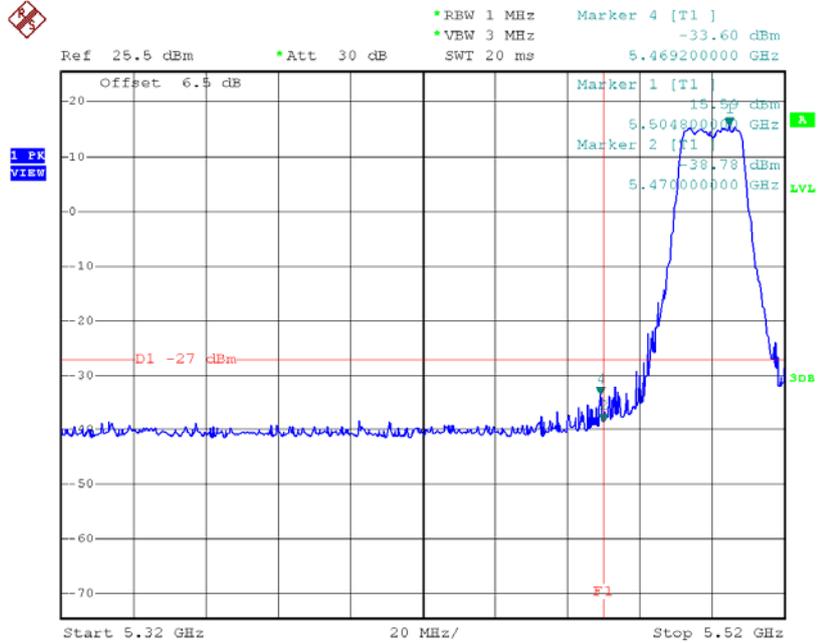

Date: 23.JUL.2015 14:20:41


TX mode CH140

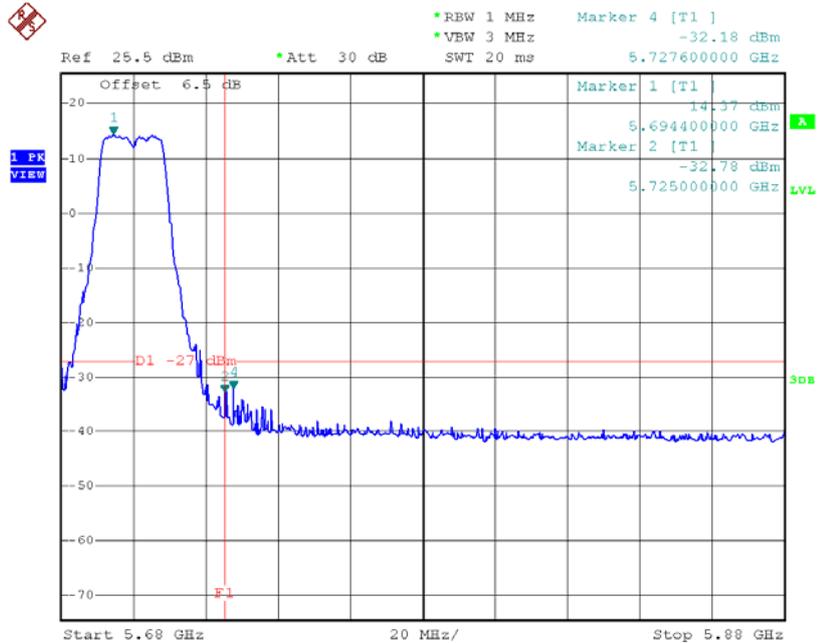

Date: 23.JUL.2015 14:23:09


Test Mode: UNII-2C/TX AC40 Mode

TX mode CH102

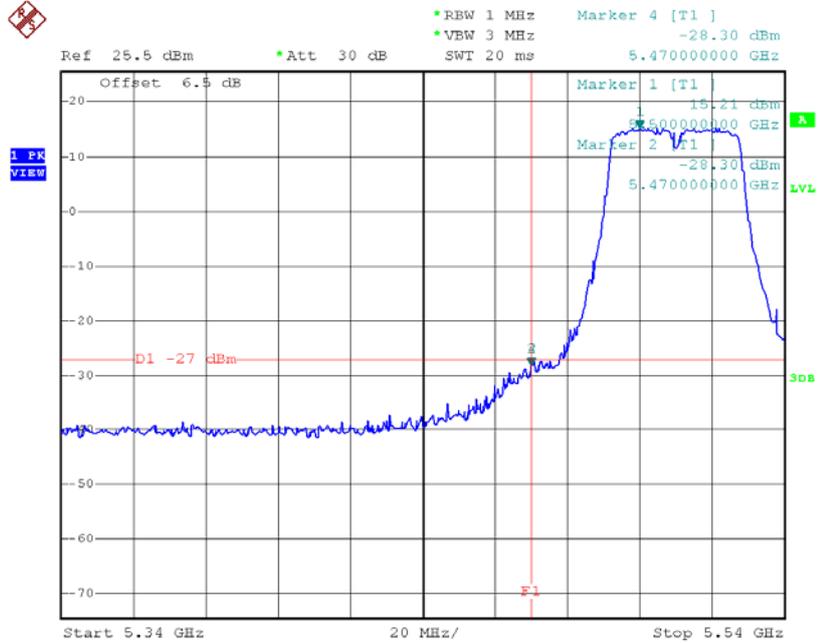

Date: 23.JUL.2015 14:57:02


TX mode CH134

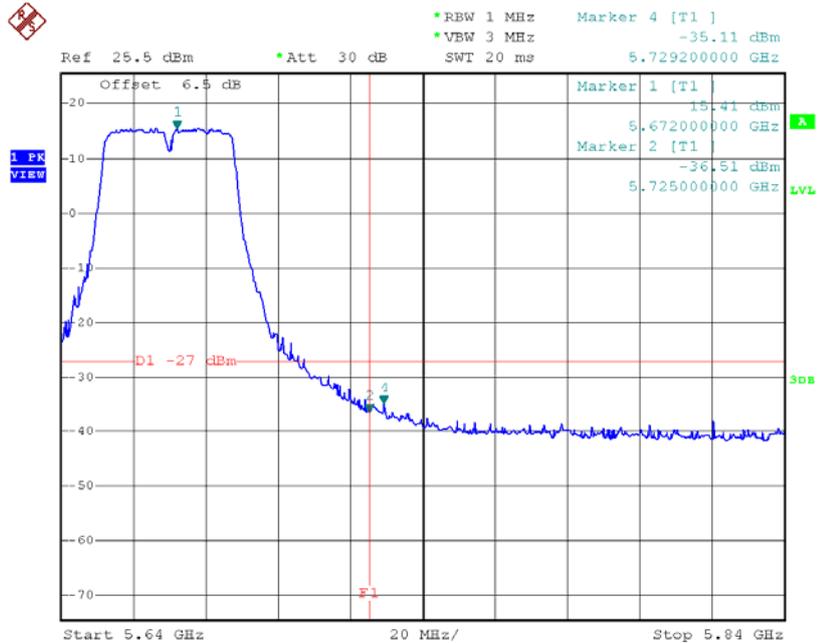

Date: 23.JUL.2015 15:01:55


Test Mode: UNII-2C/TX AC80 Mode

TX mode CH106

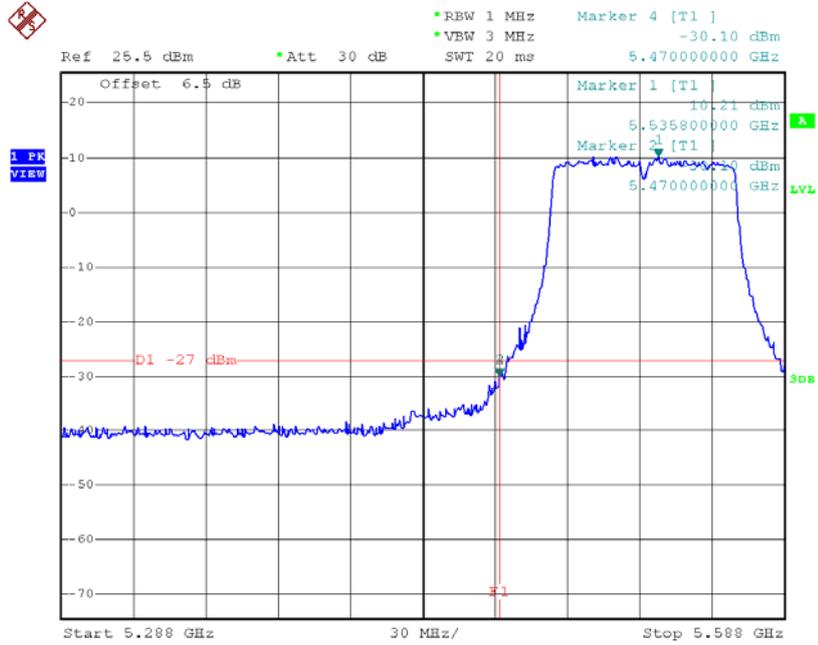

Date: 23.JUL.2015 15:15:28


TX mode CH122

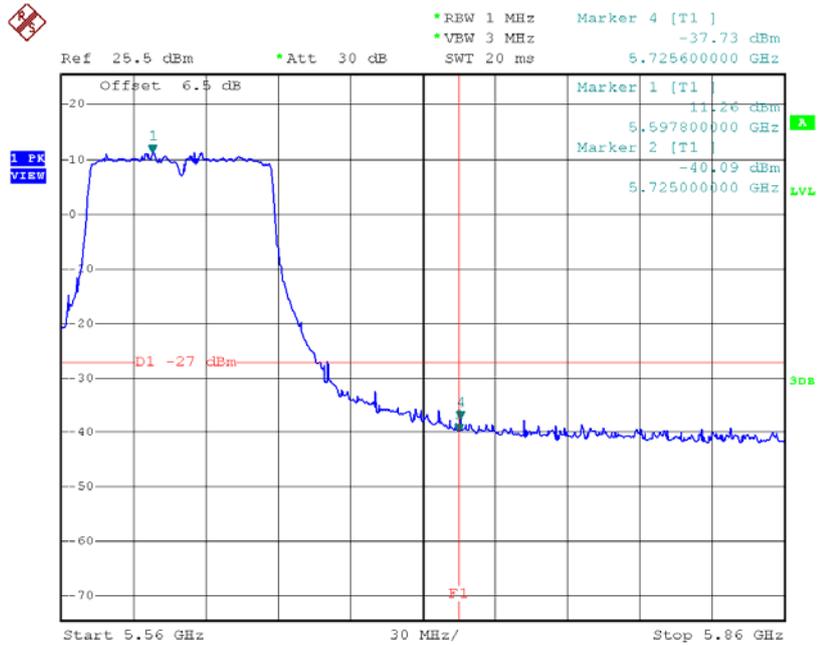

Date: 23.JUL.2015 15:17:37


Test Mode: UNII-3/TX AC20 Mode

TX AC HT20 mode CH149

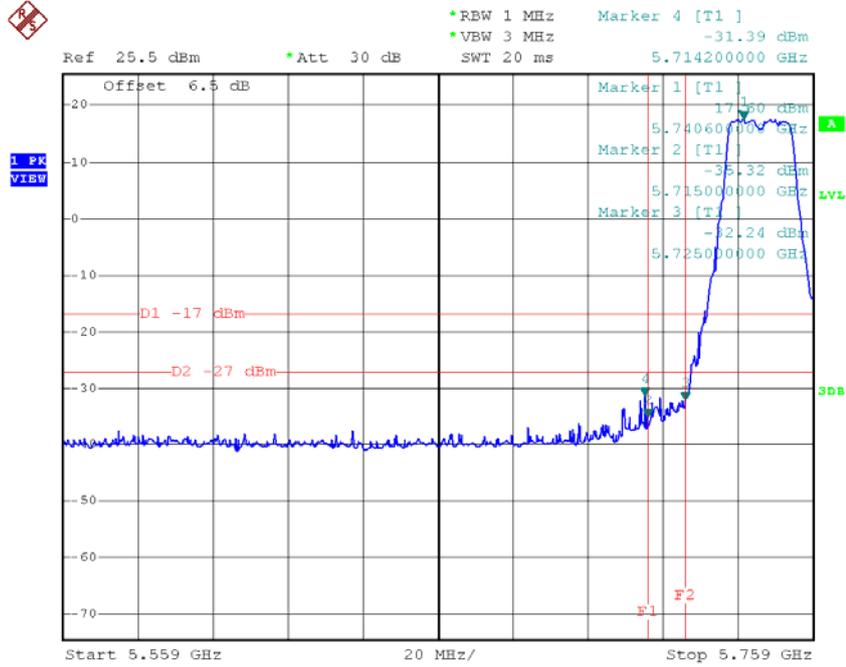

Date: 23.JUL.2015 14:25:34


TX AC HT20 mode CH165

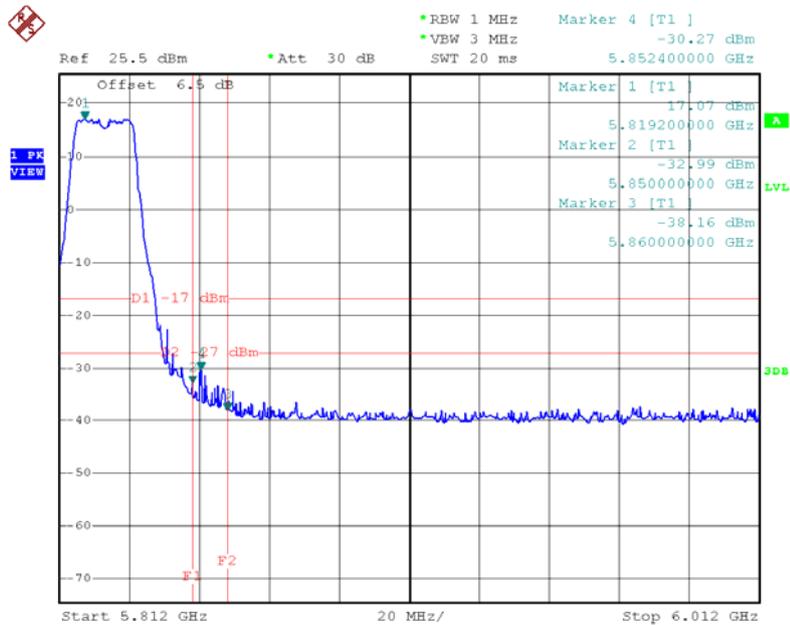

Date: 23.JUL.2015 14:27:59


Test Mode: UNII-3/TX AC40 Mode

TX AC HT40 mode CH151

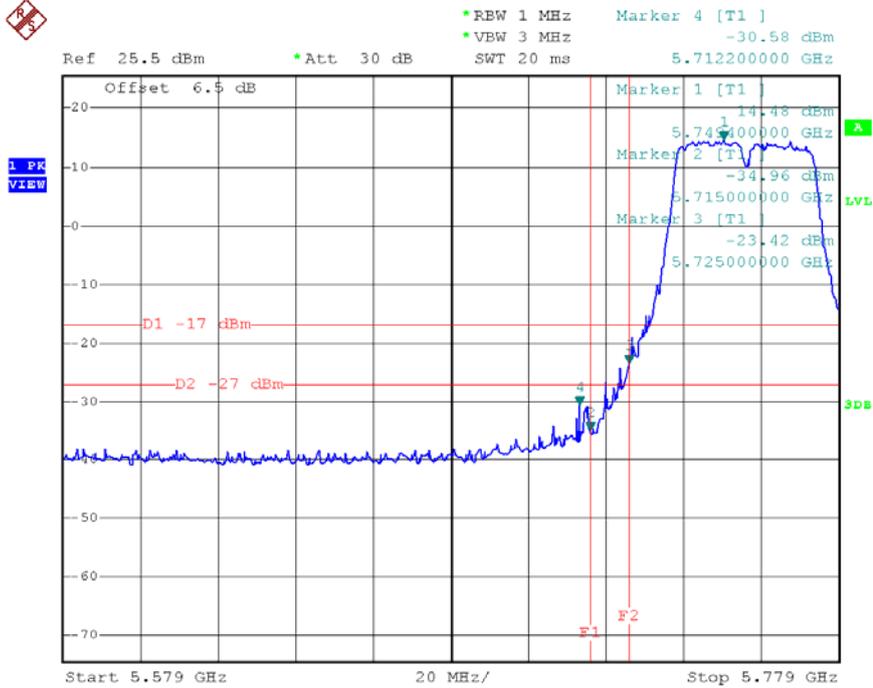

Date: 23.JUL.2015 15:03:27


TX AC HT40 mode CH159

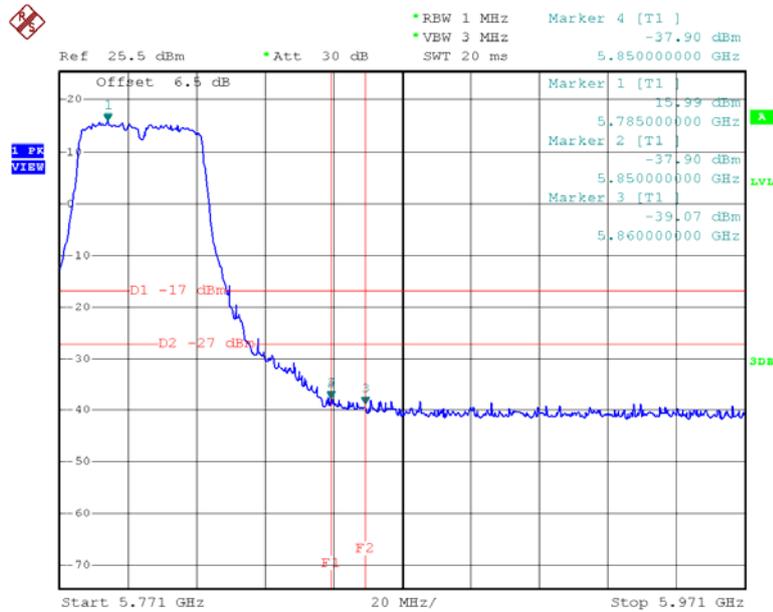


Date: 23.JUL.2015 15:04:38

Test Mode: UNII-3/TX AC80 Mode

TX AC HT80 mode CH155

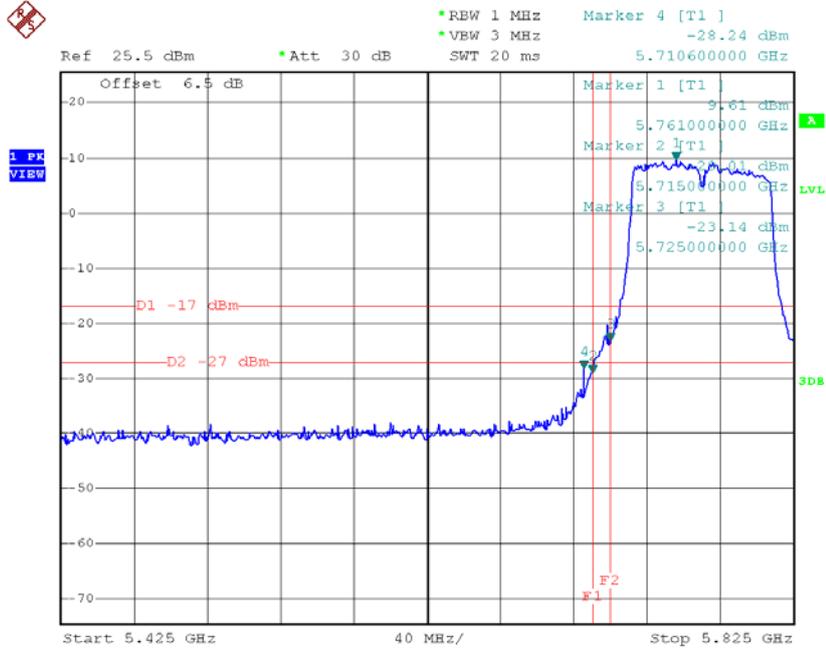

Date: 23.JUL.2015 15:20:03

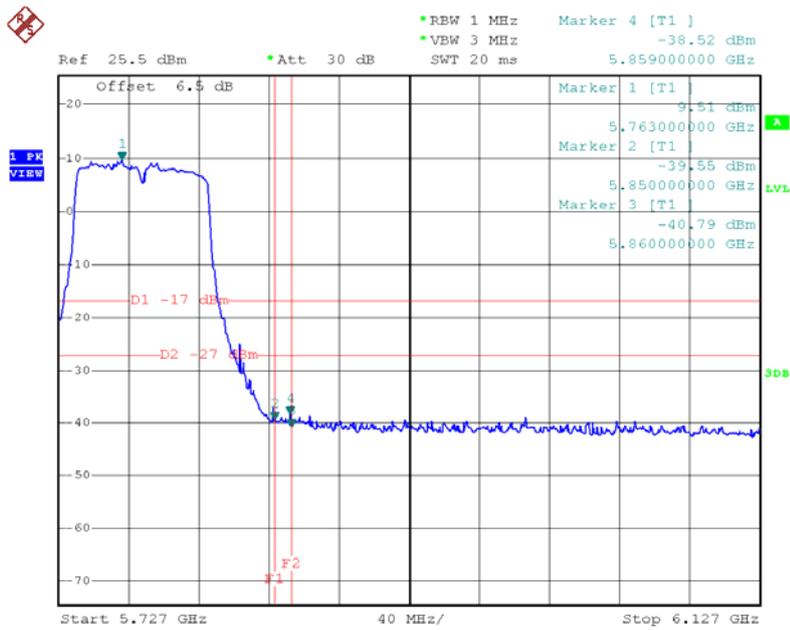


Date: 23.JUL.2015 15:20:11

For 2TX


Test Mode: UNII-1/TX A Mode_ANT A

TX mode CH36

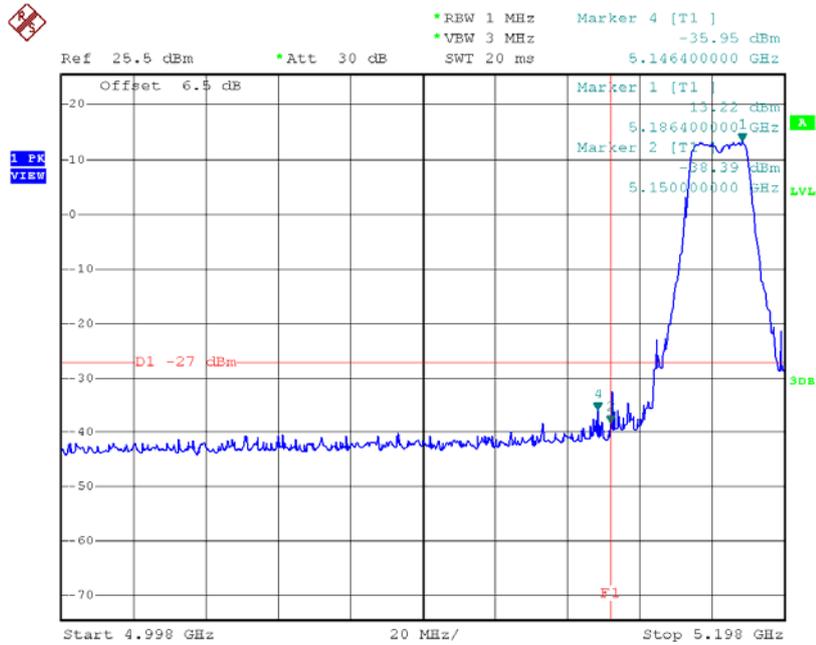

Date: 21.JUL.2015 11:23:16


TX mode CH48

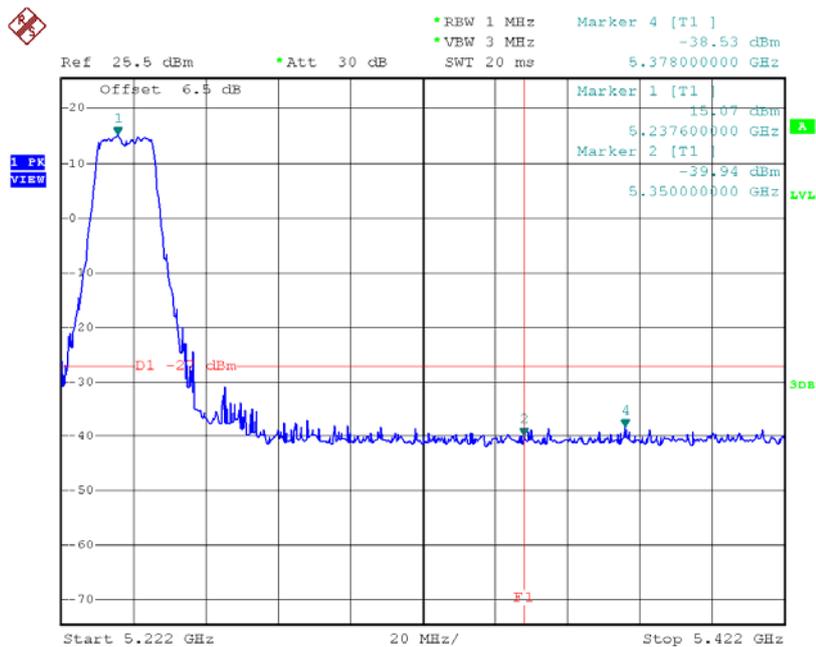

Date: 21.JUL.2015 11:29:08


Test Mode: UNII-1/TX A Mode_ANT B

TX mode CH36

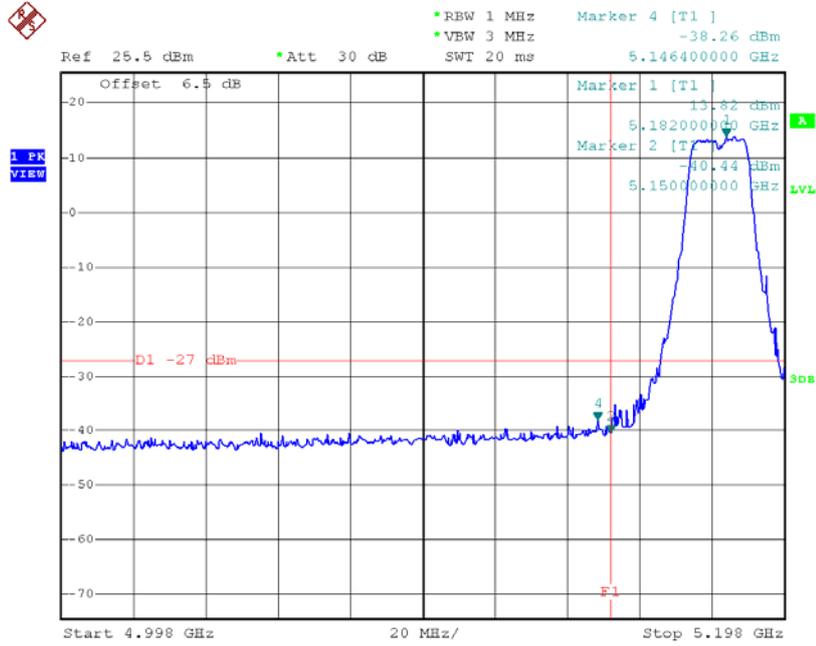

Date: 23.JUL.2015 15:25:27


TX mode CH48

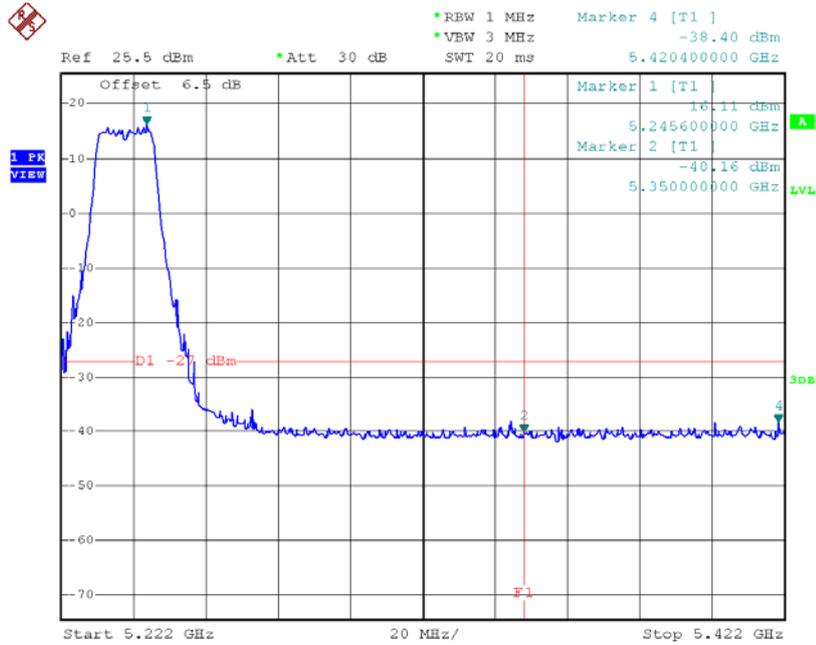

Date: 23.JUL.2015 15:29:42


Test Mode: UNII-1/TX N20 Mode_ANT A

TX mode CH36

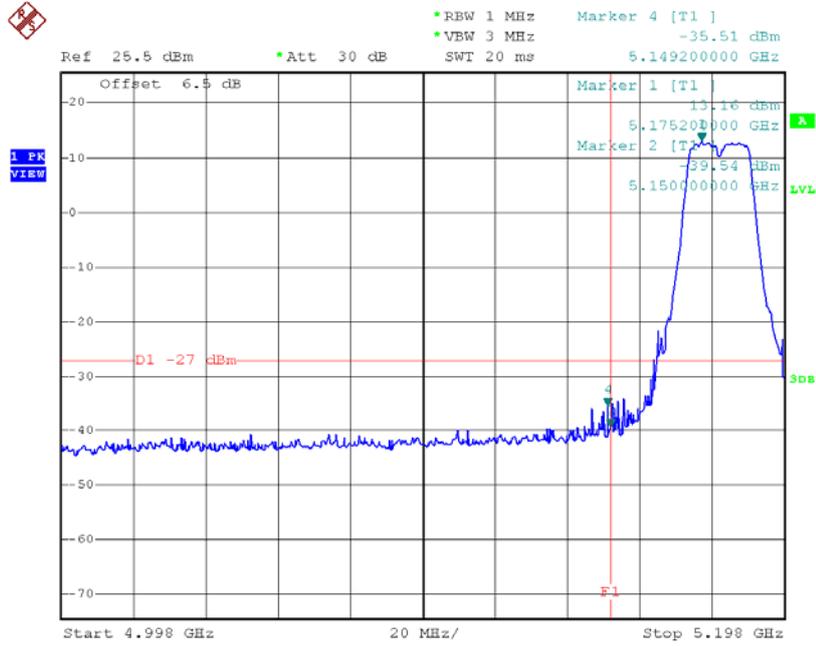

Date: 21.JUL.2015 11:48:08


TX mode CH48

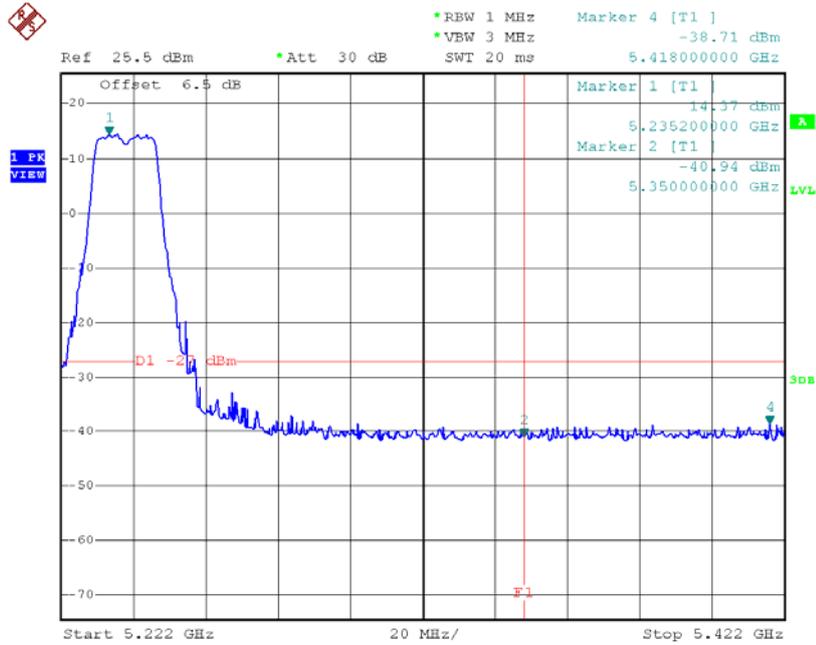

Date: 21.JUL.2015 11:51:05


Test Mode: UNII-1/TX N20 Mode_ANT B

TX mode CH36

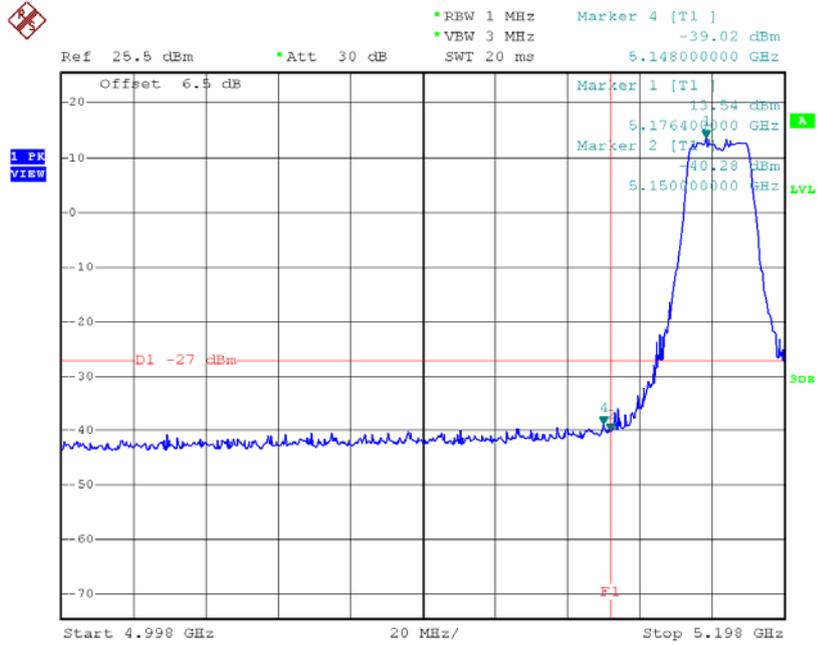

Date: 23.JUL.2015 15:58:10


TX mode CH48

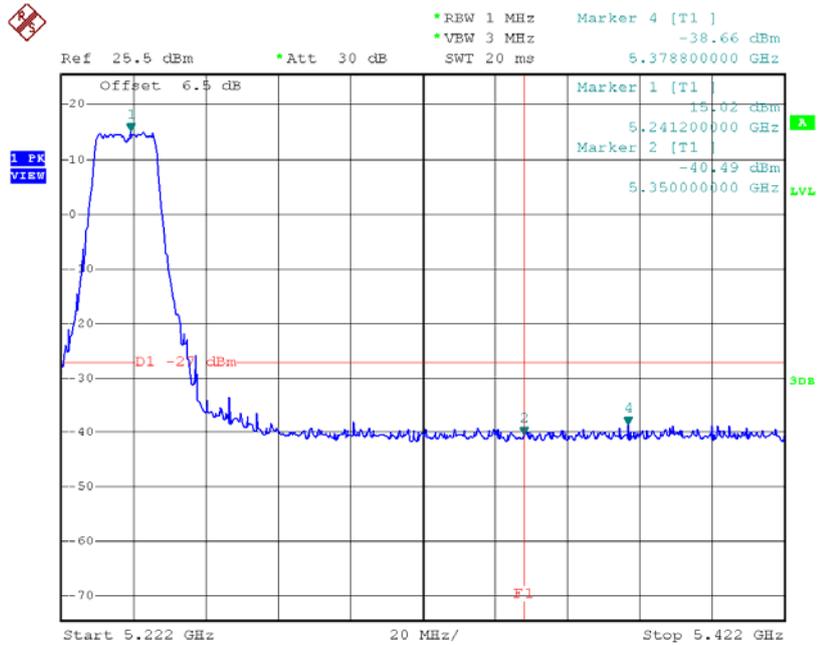

Date: 23.JUL.2015 16:03:26


Test Mode: UNII-1/TX N40 Mode_ANT A

TX mode CH38

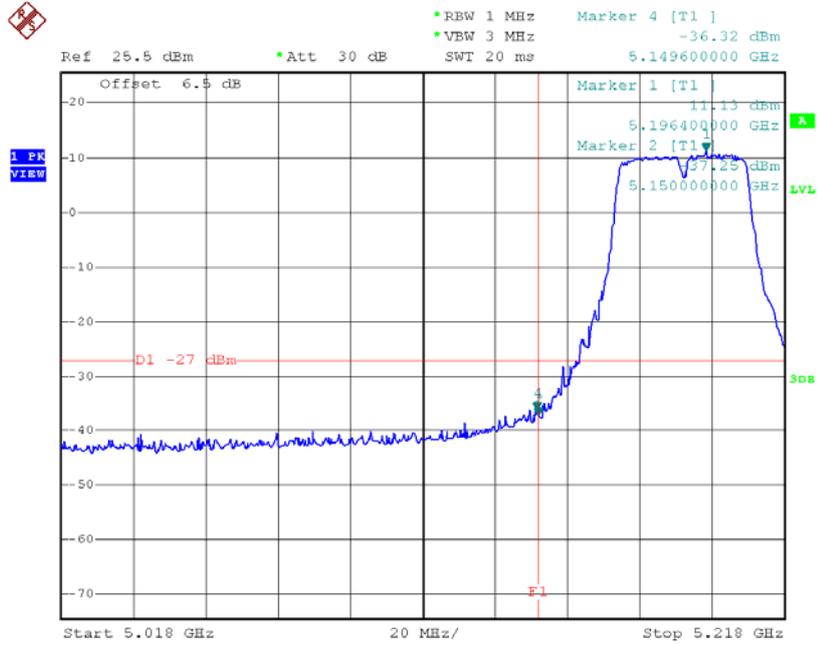

Date: 21.JUL.2015 14:11:24


TX mode CH46

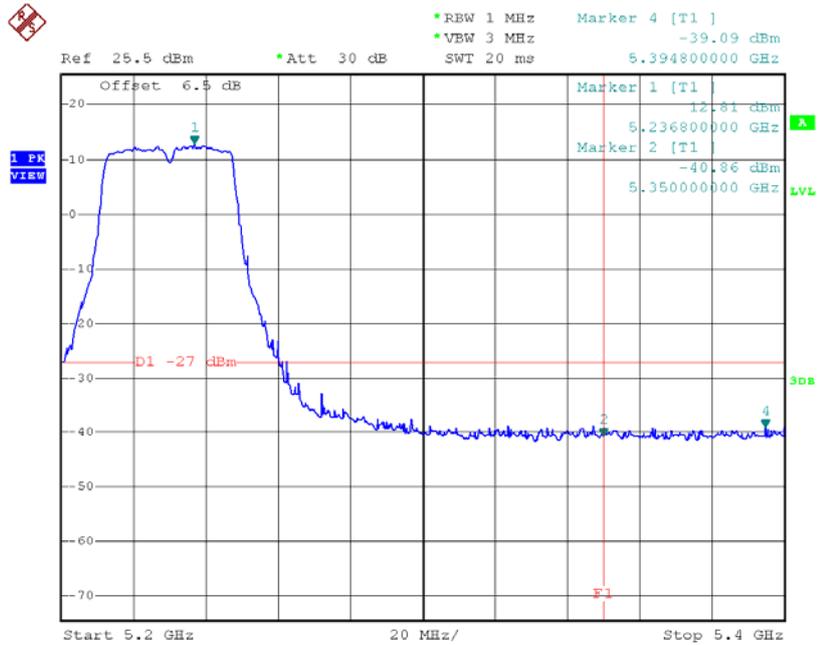

Date: 21.JUL.2015 14:12:40


Test Mode: UNII-1/TX N40 Mode_ANT B

TX mode CH38

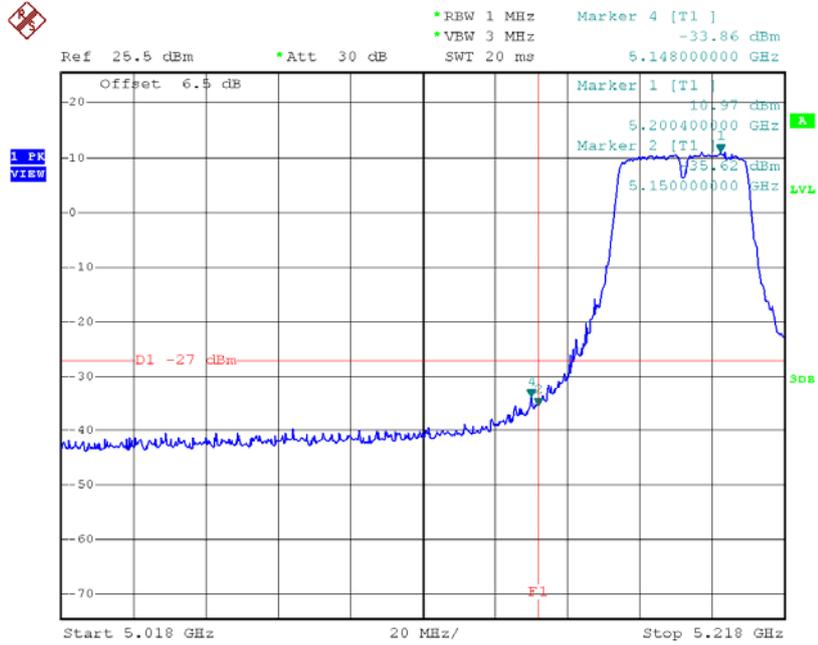

Date: 23.JUL.2015 16:34:19


TX mode CH46

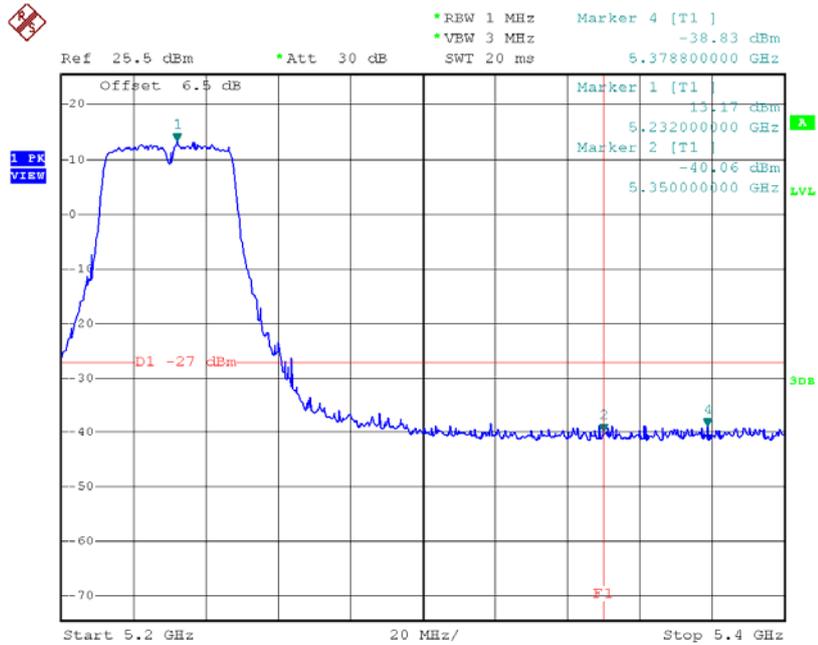

Date: 23.JUL.2015 16:35:21


Test Mode: UNII-2A/TX A Mode_ANT A

TX mode CH52

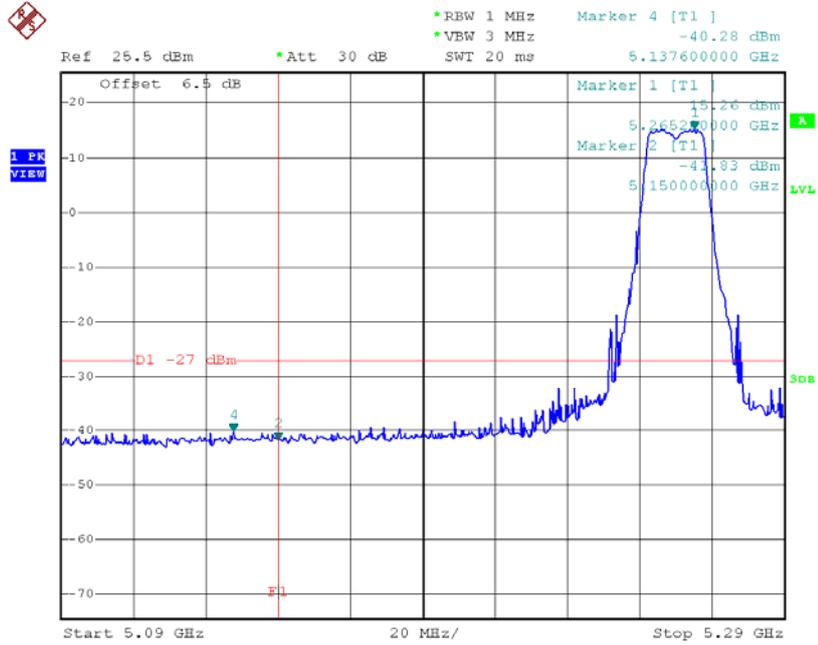

Date: 21.JUL.2015 11:30:40


TX mode CH64

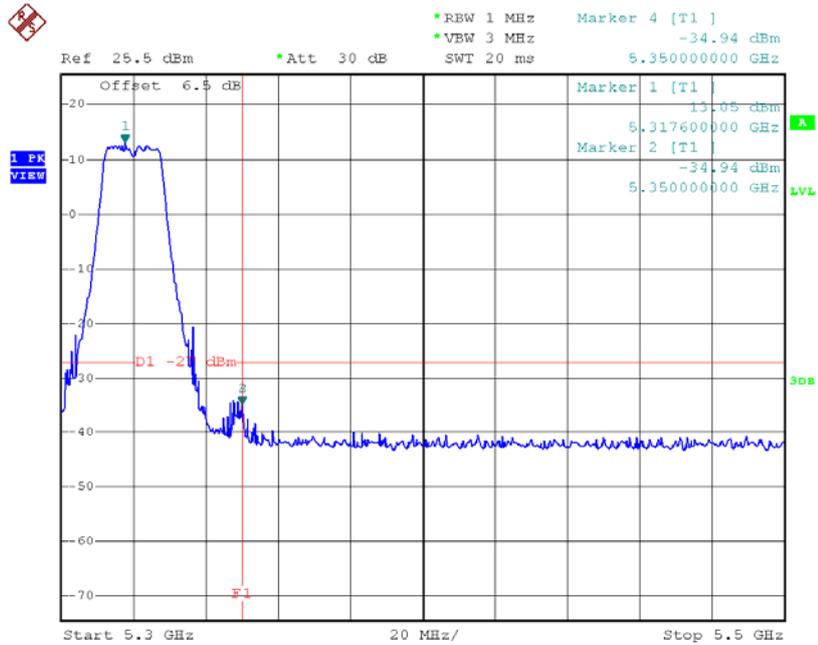

Date: 21.JUL.2015 11:34:21


Test Mode: UNII-2A/TX A Mode_ANT B

TX mode CH52

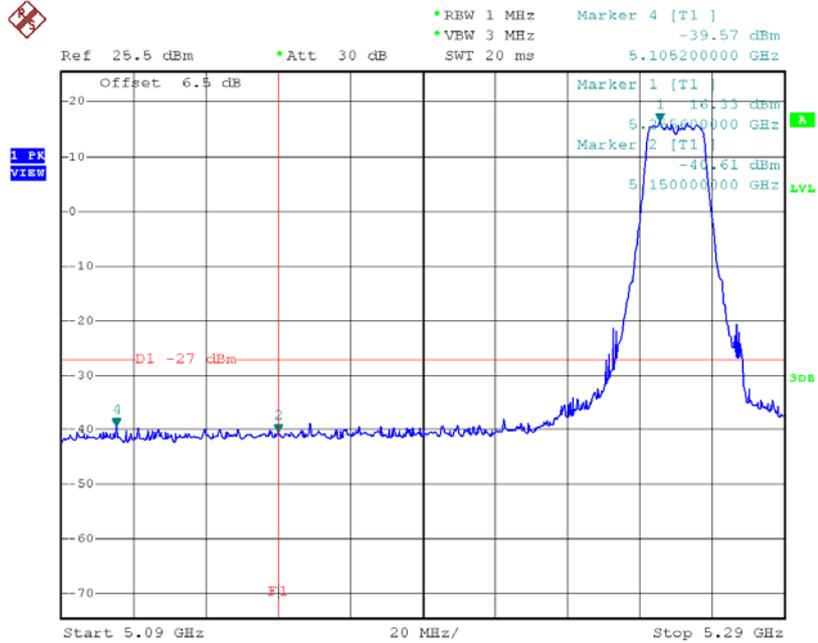

Date: 23.JUL.2015 15:31:25


TX mode CH64

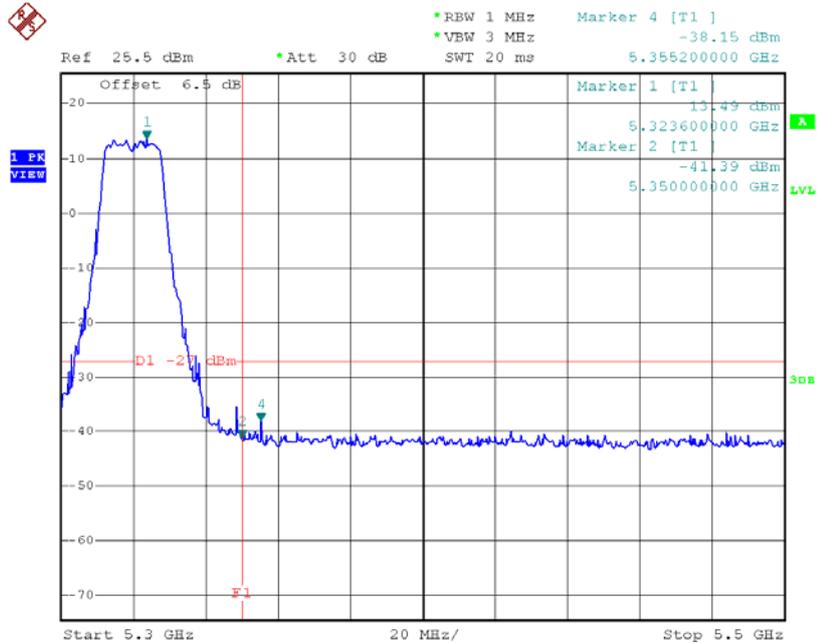

Date: 23.JUL.2015 15:35:50


Test Mode: UNII-2A/TX N20 Mode_ANT A

TX mode CH52

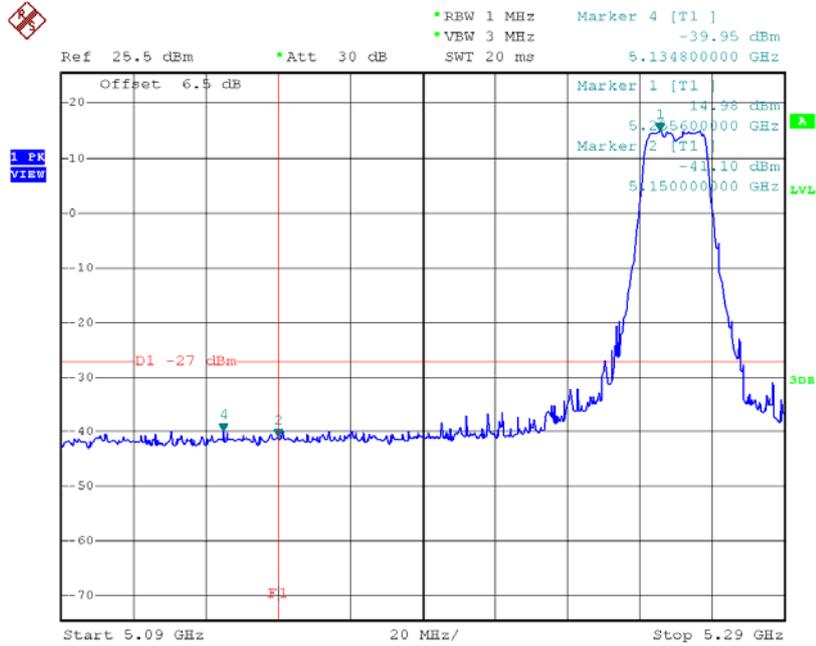

Date: 21.JUL.2015 11:52:48


TX mode CH64

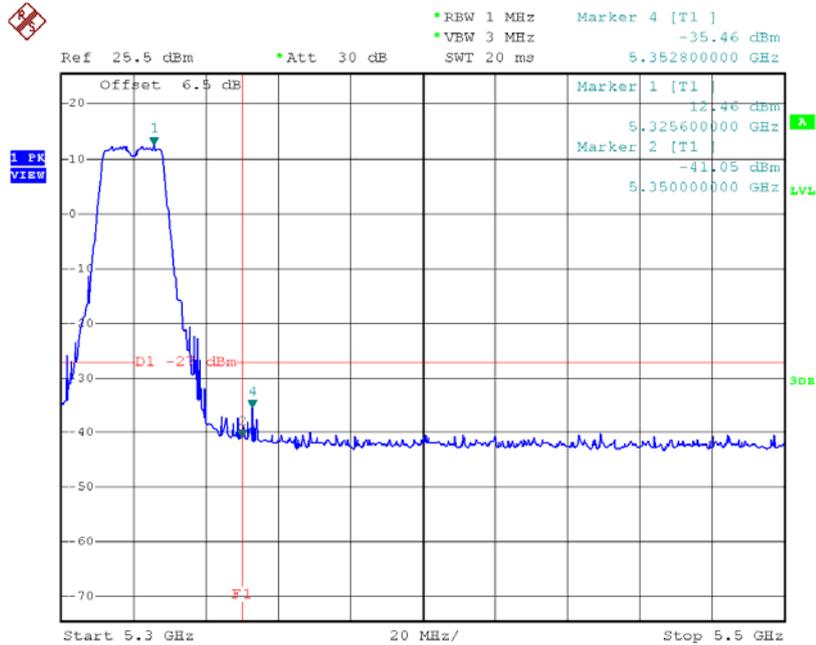

Date: 21.JUL.2015 11:56:25


Test Mode: UNII-2A/TX N40 Mode_ANT A

TX mode CH54

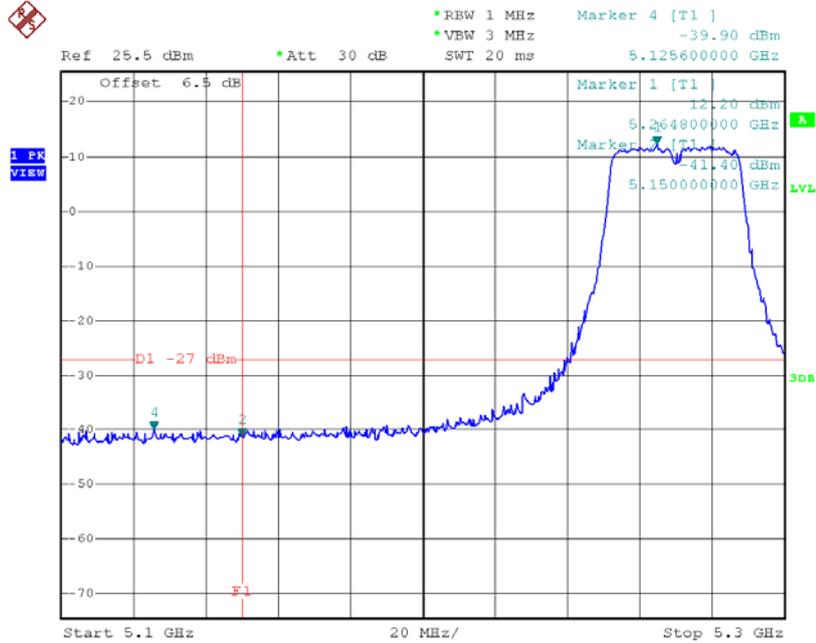

Date: 21.JUL.2015 14:14:43


TX mode CH62

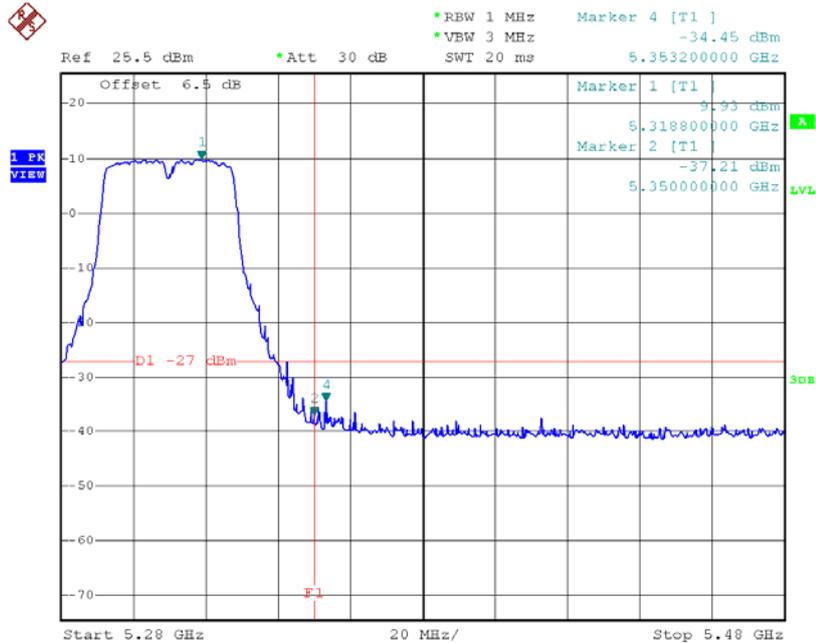

Date: 21.JUL.2015 14:16:13


Test Mode: UNII-2A/TX N40 Mode_ANT B

TX mode CH54

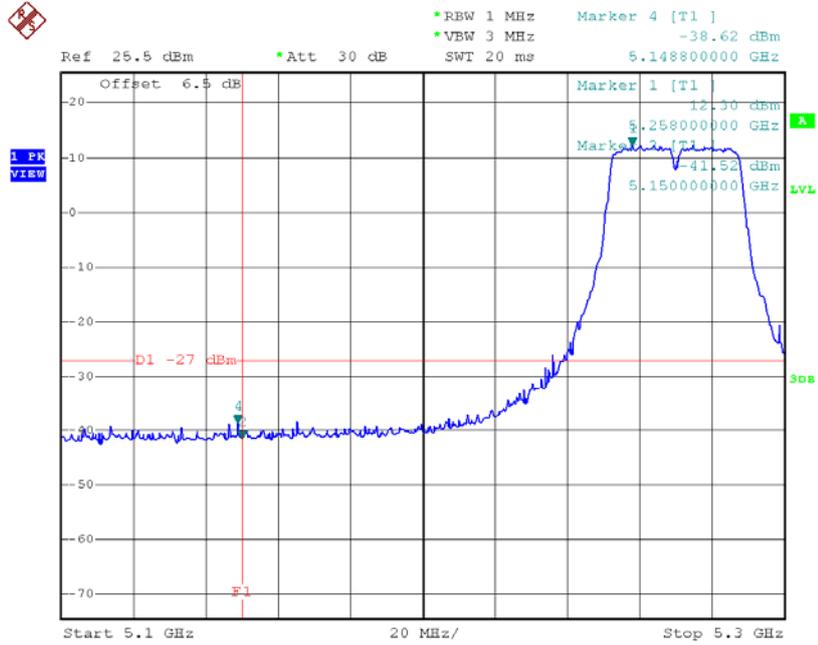

Date: 23.JUL.2015 16:36:26


TX mode CH62

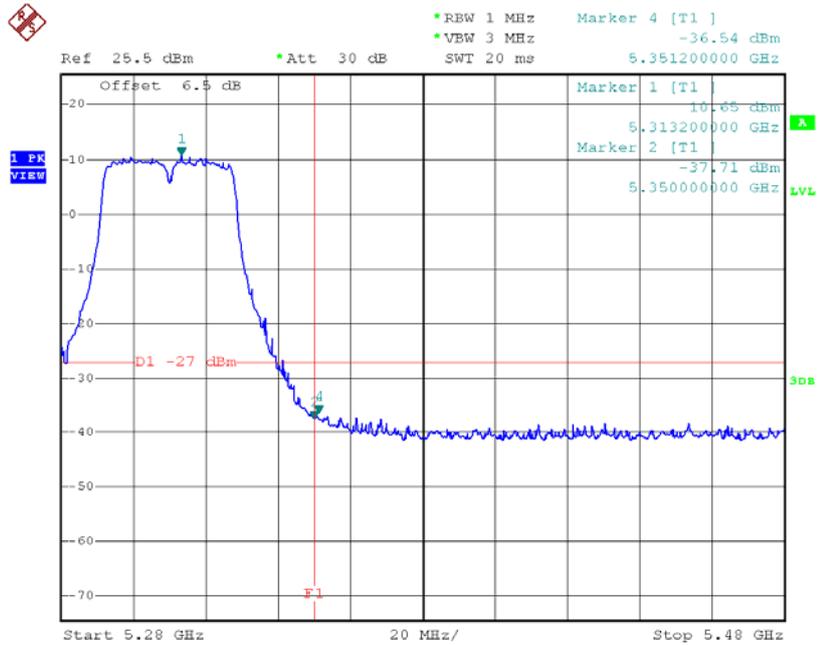

Date: 23.JUL.2015 16:39:49


Test Mode: UNII-2C/TX A Mode_ANT A

TX mode CH100

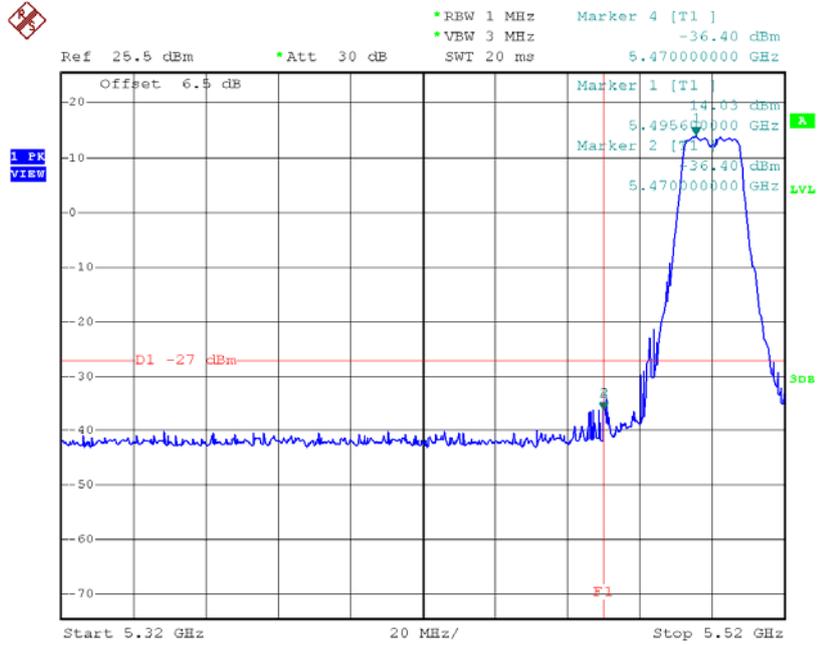

Date: 21.JUL.2015 11:37:01


TX mode CH140

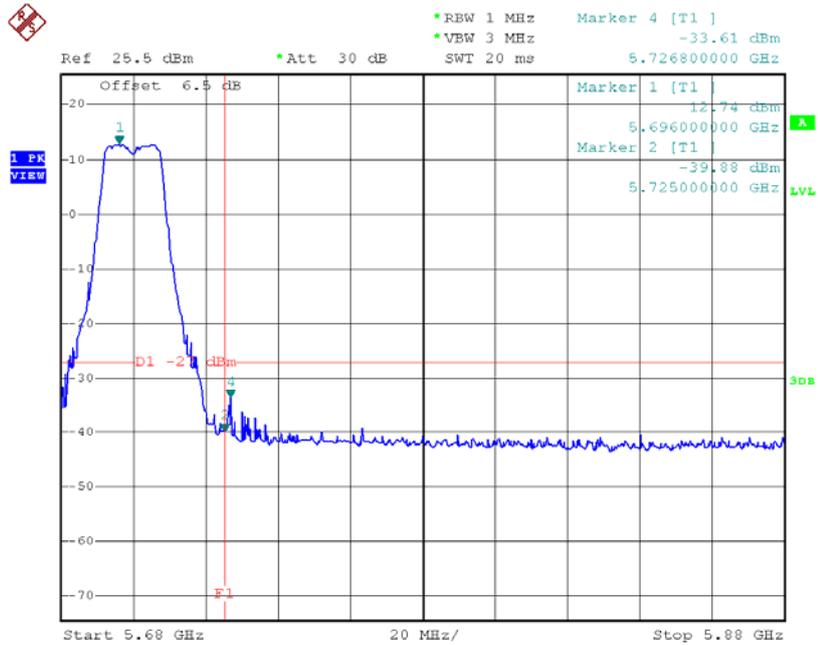

Date: 21.JUL.2015 11:39:53


Test Mode: UNII-2C/TX A Mode_ANT B

TX mode CH100

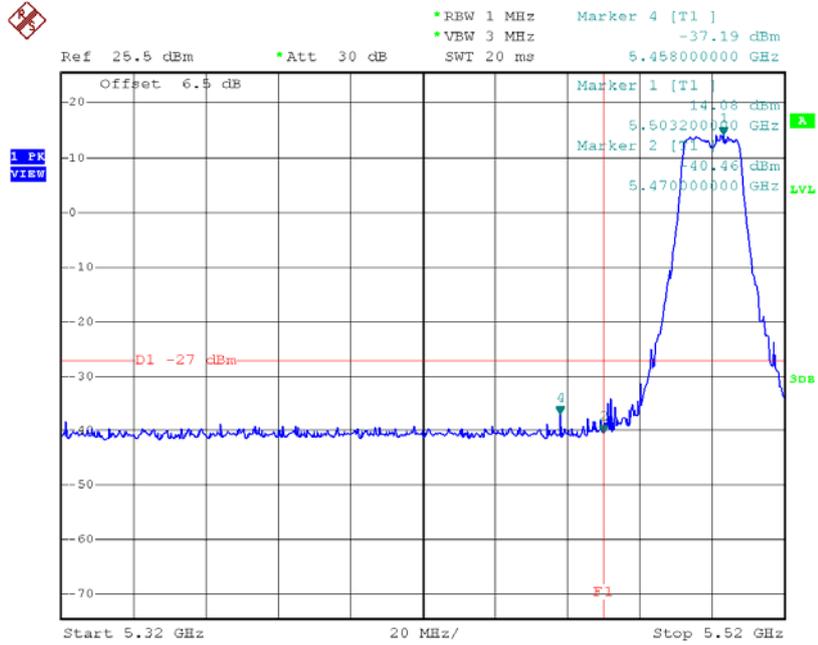

Date: 23.JUL.2015 15:43:47


TX mode CH140

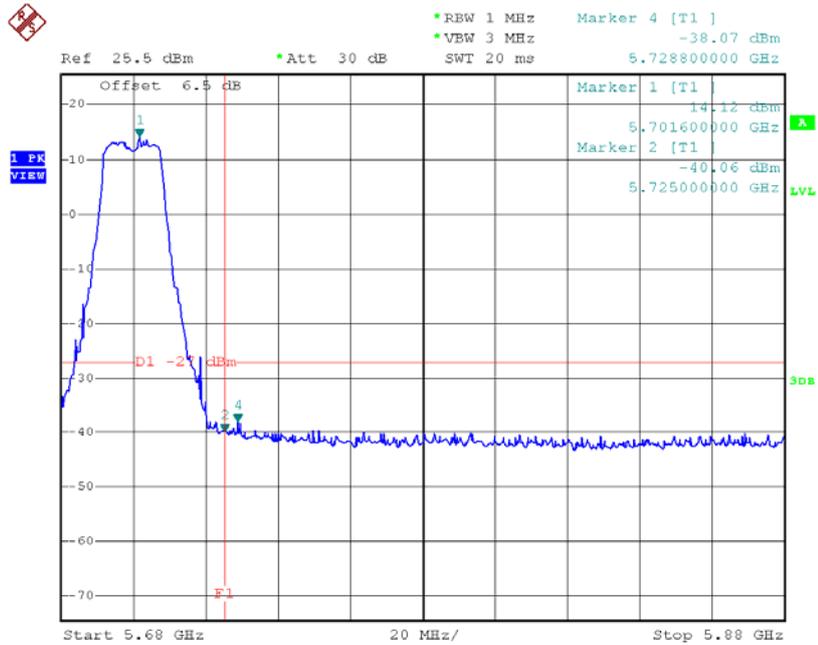

Date: 23.JUL.2015 15:46:55


Test Mode: UNII-2C/TX N20 Mode_ANT A

TX mode CH100

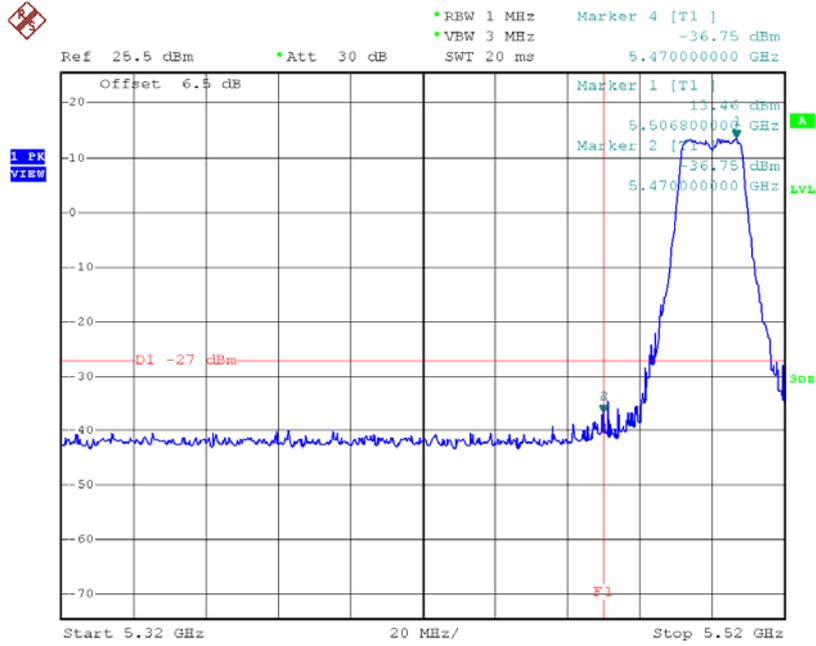

Date: 21.JUL.2015 11:57:45


TX mode CH140

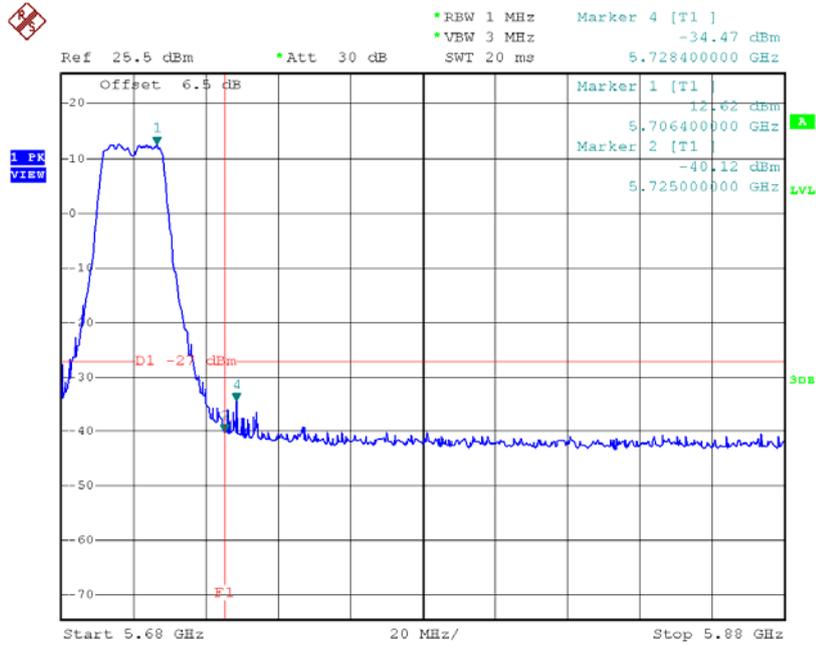

Date: 21.JUL.2015 12:00:09


Test Mode: UNII-2C/TX N20 Mode_ANT B

TX mode CH100

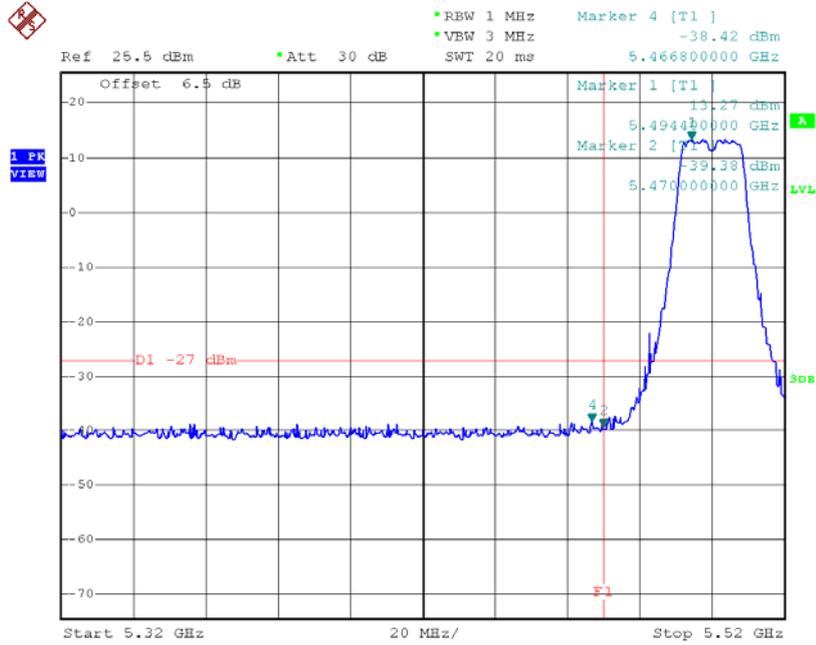

Date: 23.JUL.2015 16:07:50


TX mode CH140

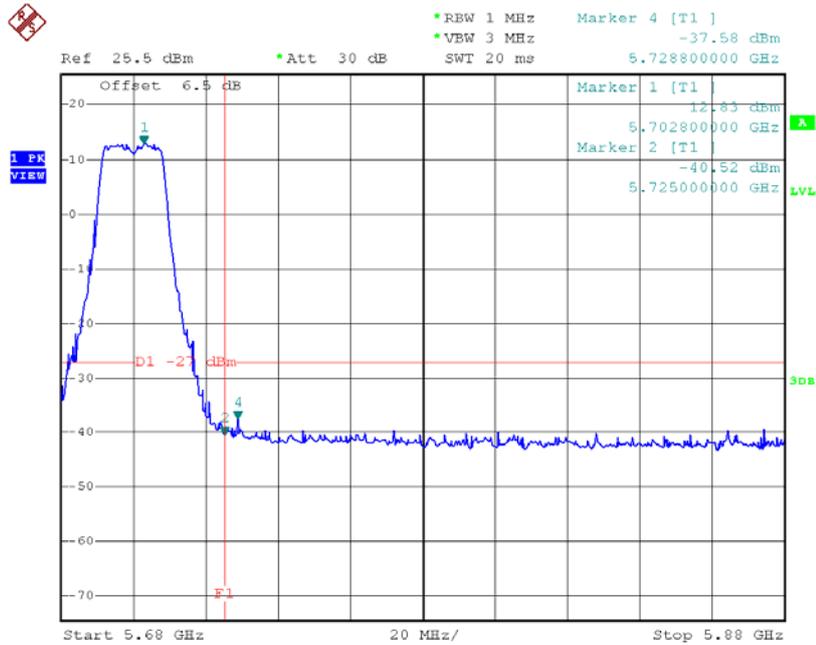

Date: 23.JUL.2015 16:09:40


Test Mode: UNII-2C/TX N40 Mode_ANT A

TX mode CH102

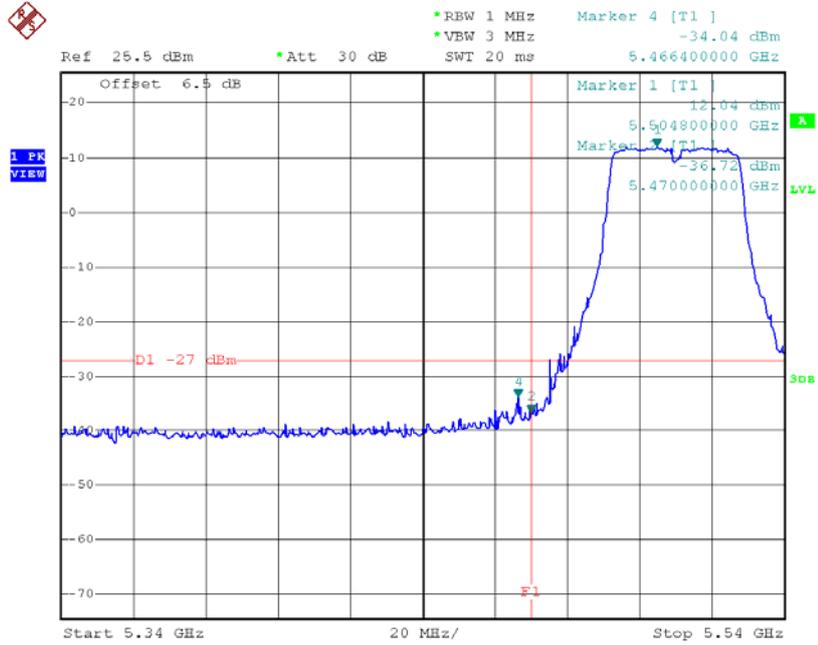

Date: 21.JUL.2015 14:17:28


TX mode CH134

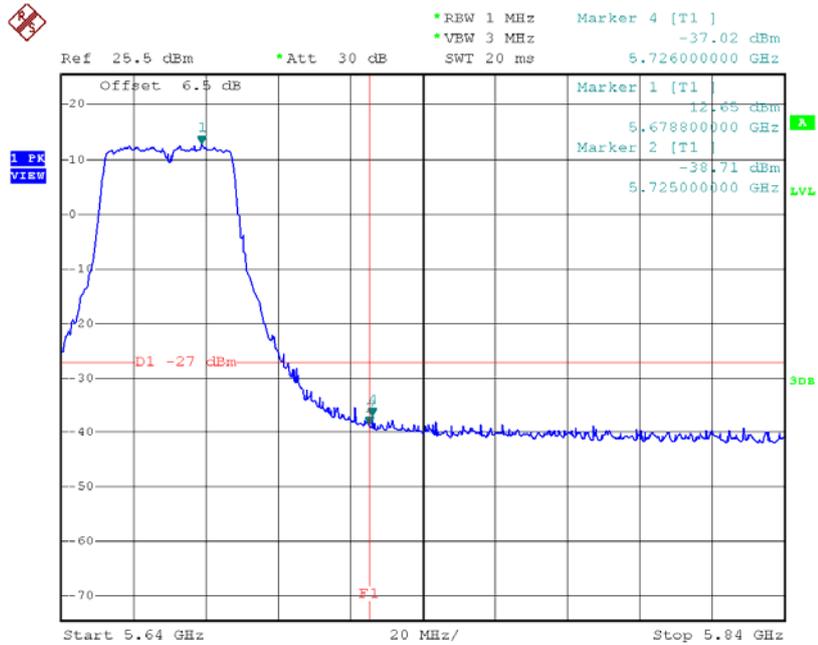

Date: 21.JUL.2015 14:20:55


Test Mode: UNII-2C/TX N40 Mode_ANT B

TX mode CH102

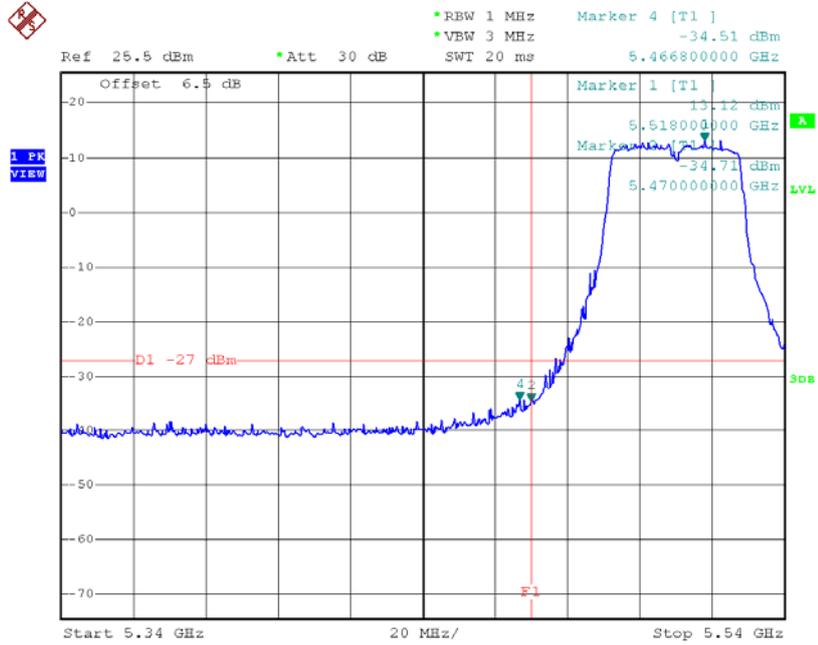

Date: 23.JUL.2015 17:58:22


TX mode CH134

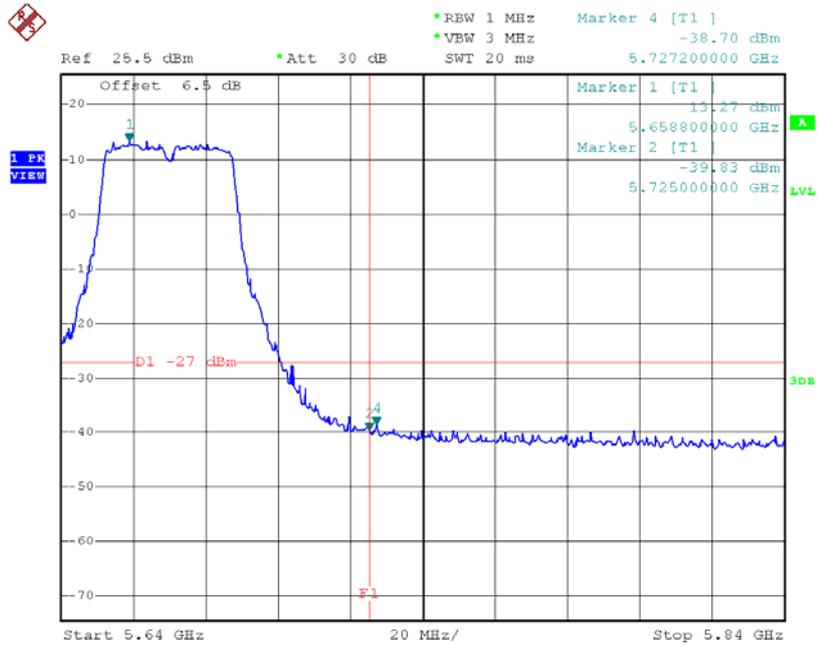

Date: 23.JUL.2015 18:52:47


Test Mode: UNII-3/TX A Mode_ANT A

TX A Mode CH149

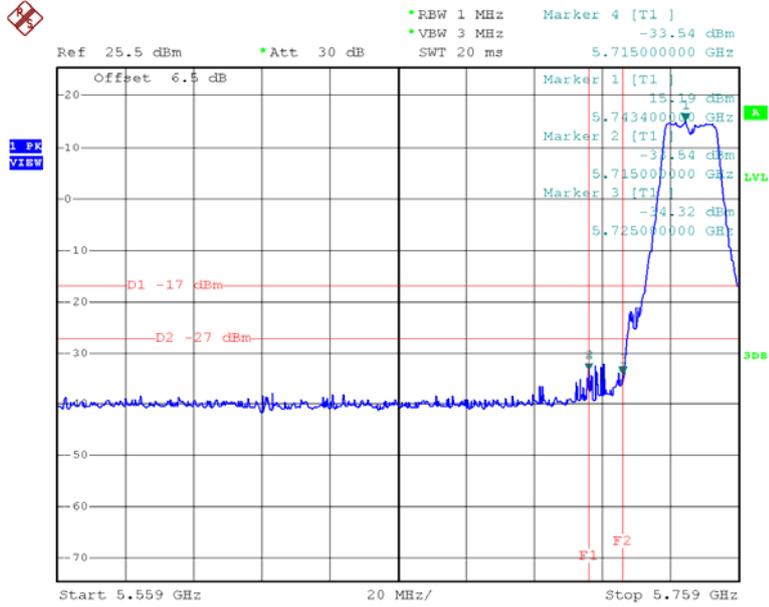

Date: 21.JUL.2015 11:41:34


TX A Mode CH165

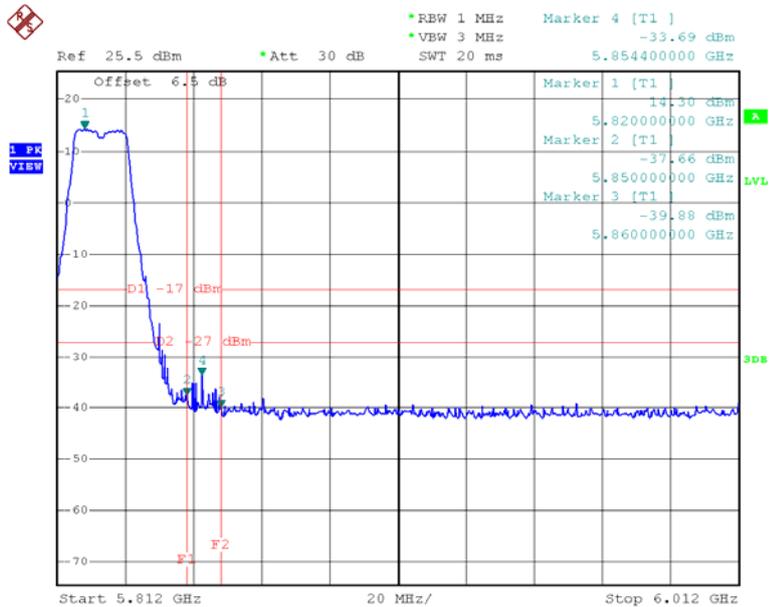

Date: 21.JUL.2015 11:44:41


Test Mode: UNII-3/TX A Mode_ANT B

TX A Mode CH149

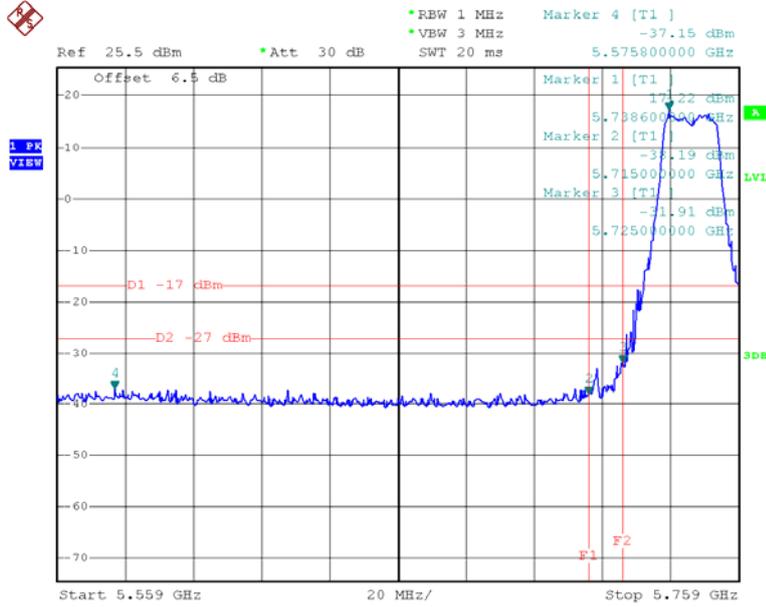

Date: 23.JUL.2015 15:48:25


TX A Mode CH165

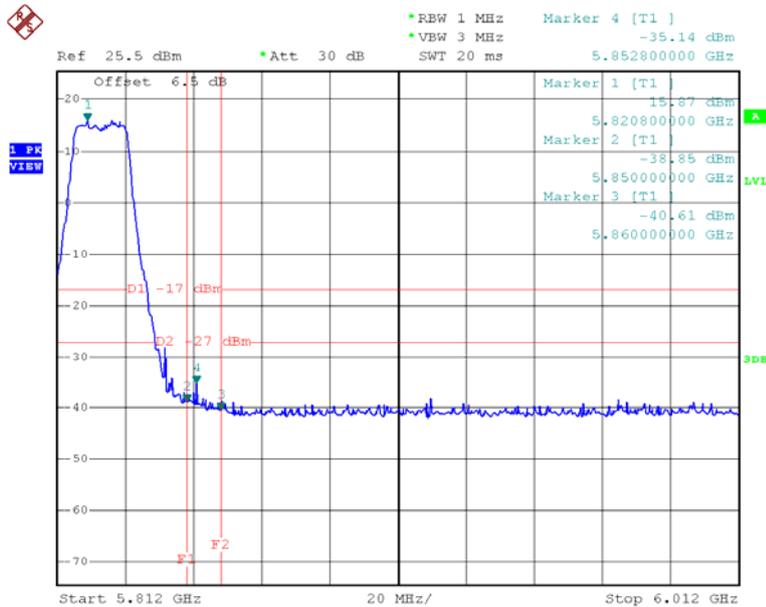

Date: 23.JUL.2015 15:51:10


Test Mode: UNII-3/TX N20 Mode_ANT A

TX HT20 mode CH149

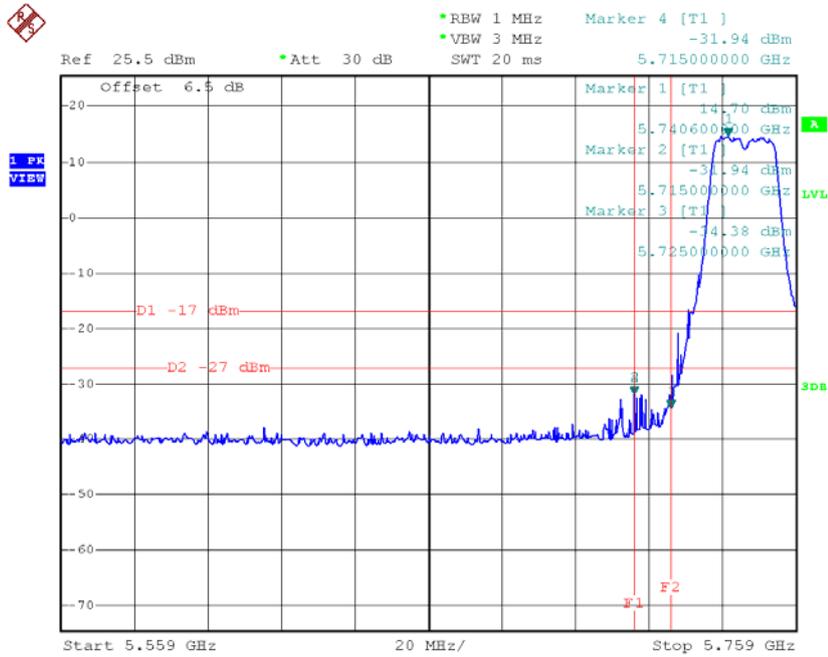

Date: 21.JUL.2015 12:01:26


TX HT20 mode CH165

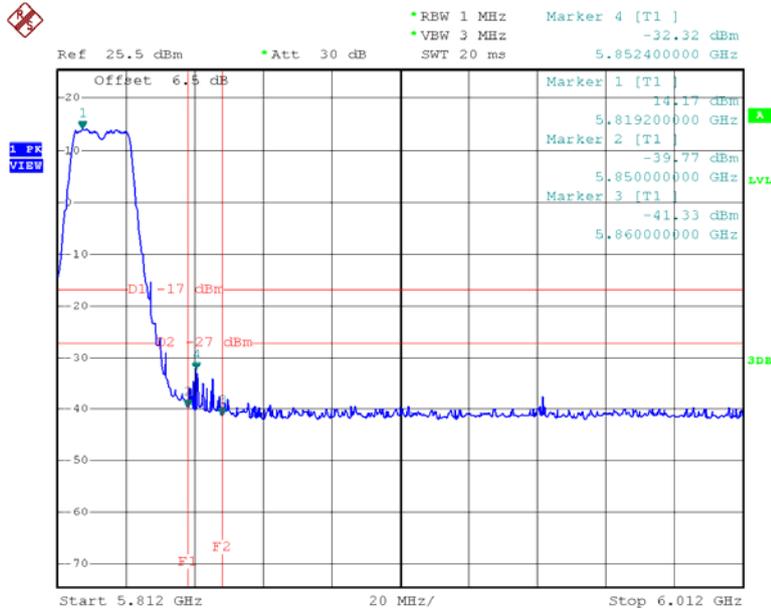

Date: 21.JUL.2015 12:04:03


Test Mode: UNII-3/TX N40 Mode_ANT A

UNII-3/TX HT40 mode CH151

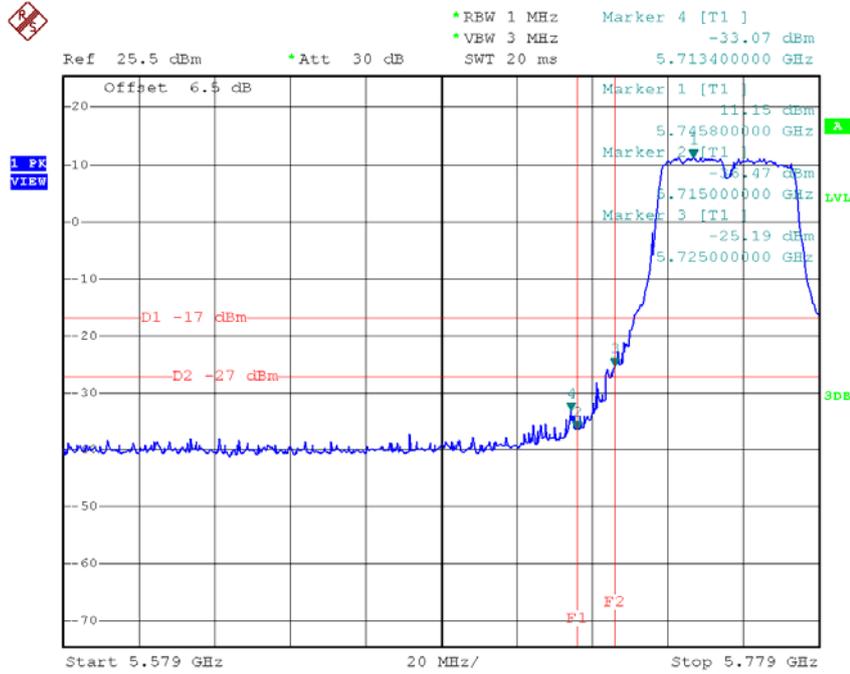

Date: 21.JUL.2015 14:23:08


UNII-3/TX HT40 mode CH159

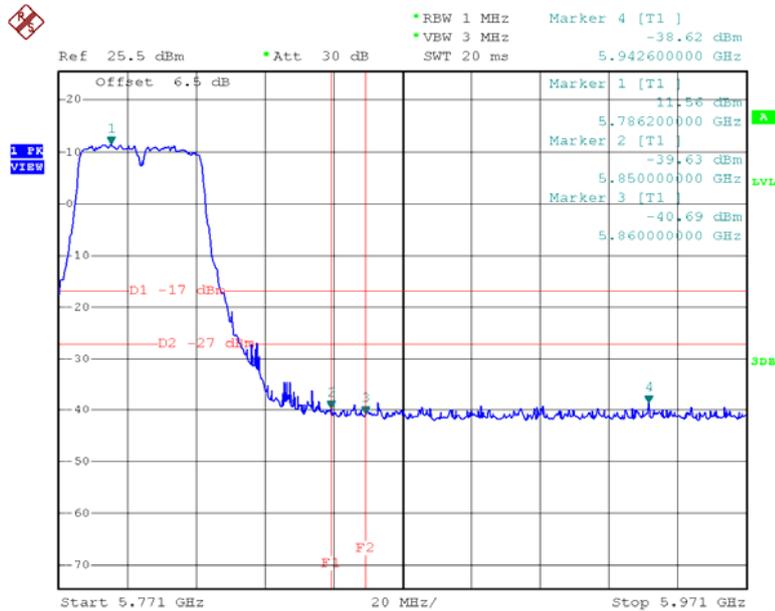

Date: 21.JUL.2015 14:24:18


Test Mode: UNII-3/TX N40 Mode_ANT B

TX HT40 mode CH151

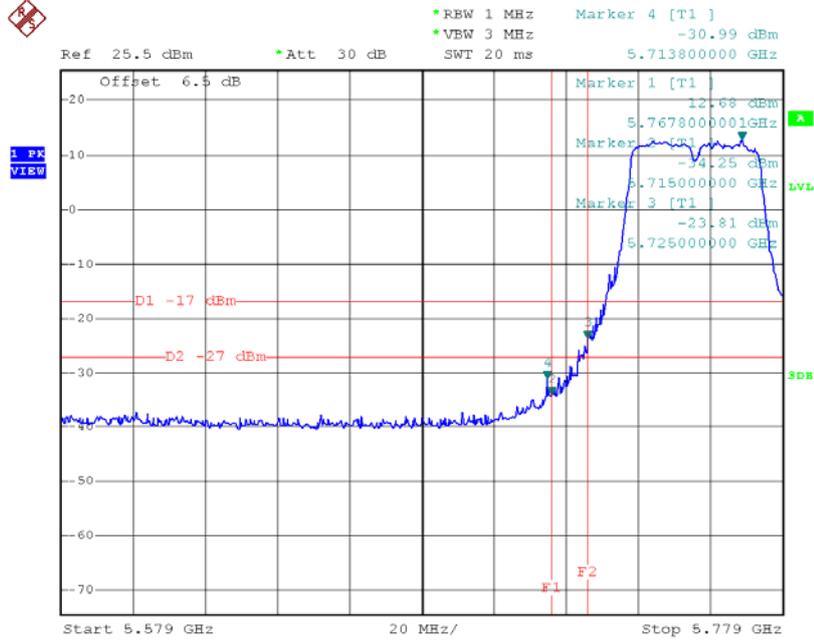

Date: 23.JUL.2015 18:54:32


HT40 mode CH159

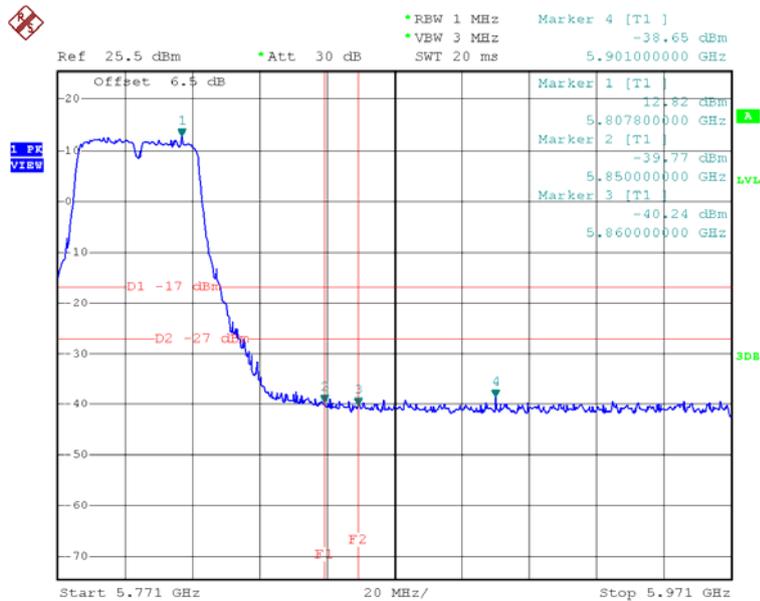

Date: 23.JUL.2015 19:01:27


Test Mode: UNII-1/TX AC20 Mode_ANT A

TX mode CH36

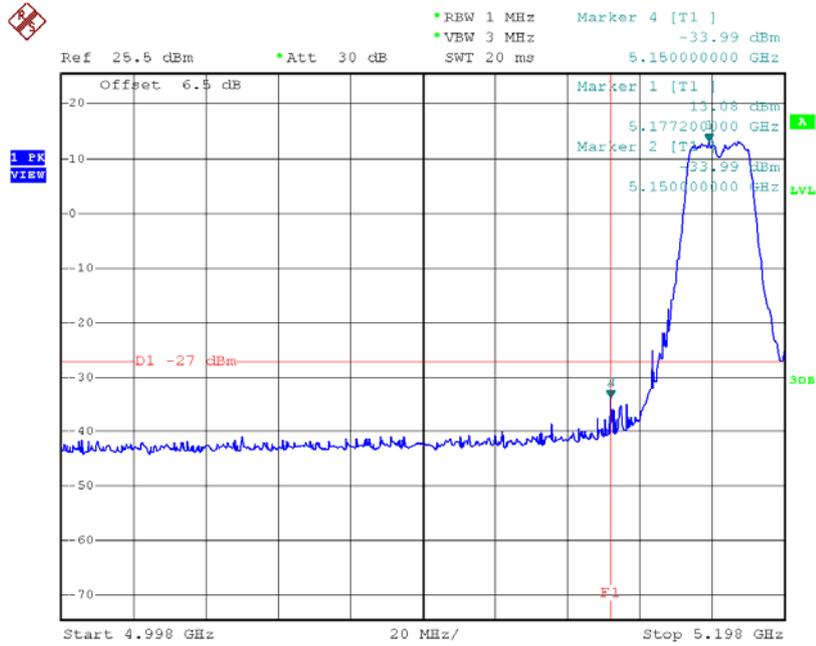

Date: 21.JUL.2015 12:06:07


TX mode CH48

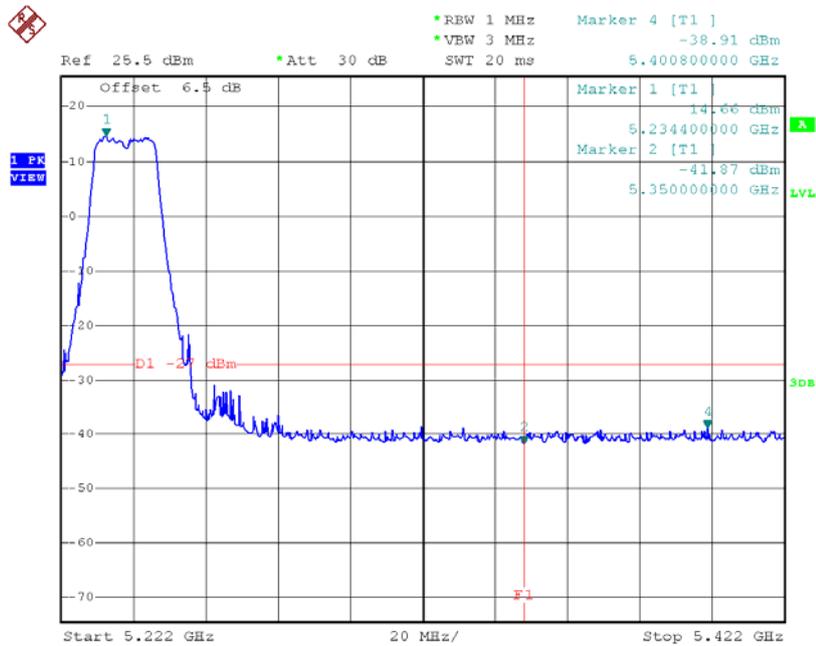

Date: 21.JUL.2015 12:20:48


Test Mode: UNII-1/TX AC20 Mode_ANT B

TX mode CH36

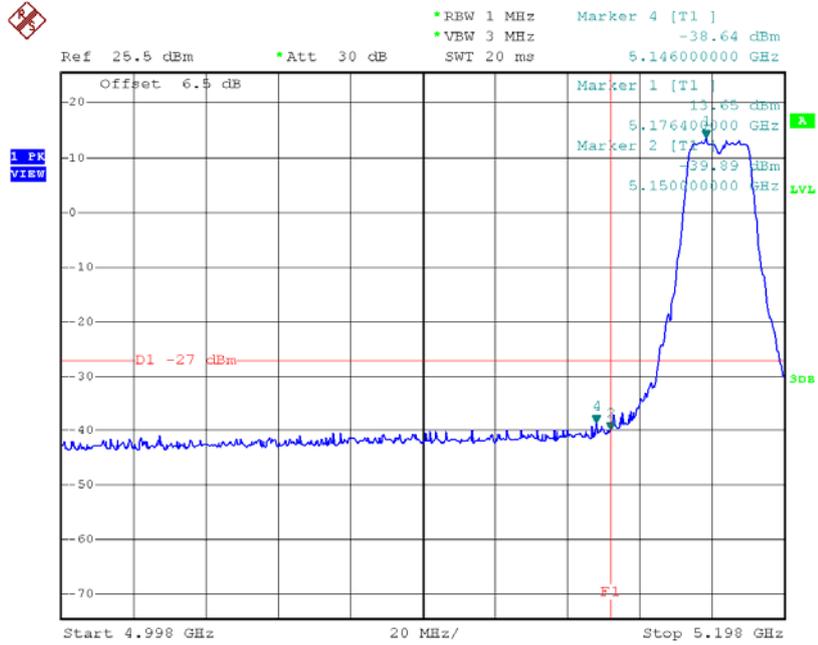

Date: 23.JUL.2015 16:16:22


TX mode CH48

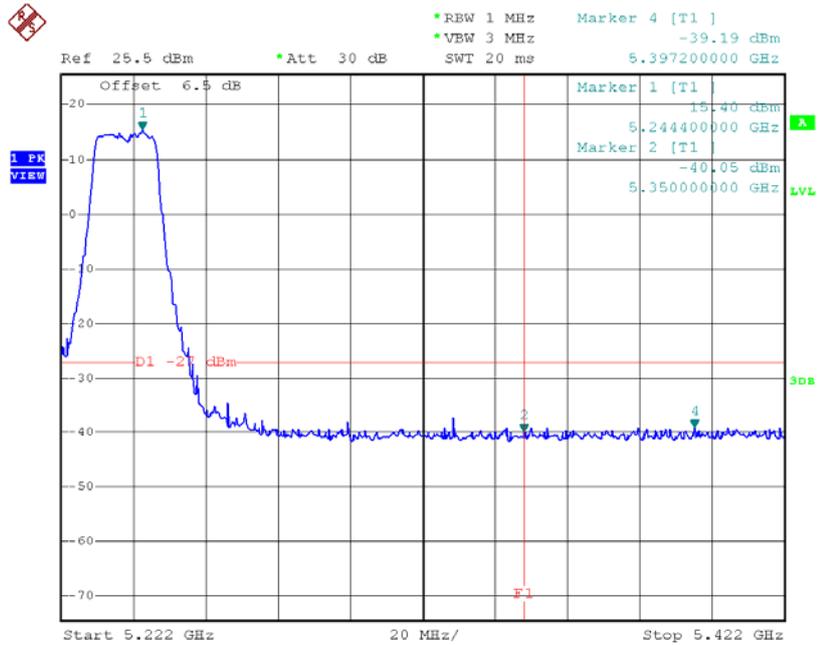

Date: 23.JUL.2015 16:18:15


Test Mode: UNII-1/TX AC40 Mode_ANT A

TX mode CH38

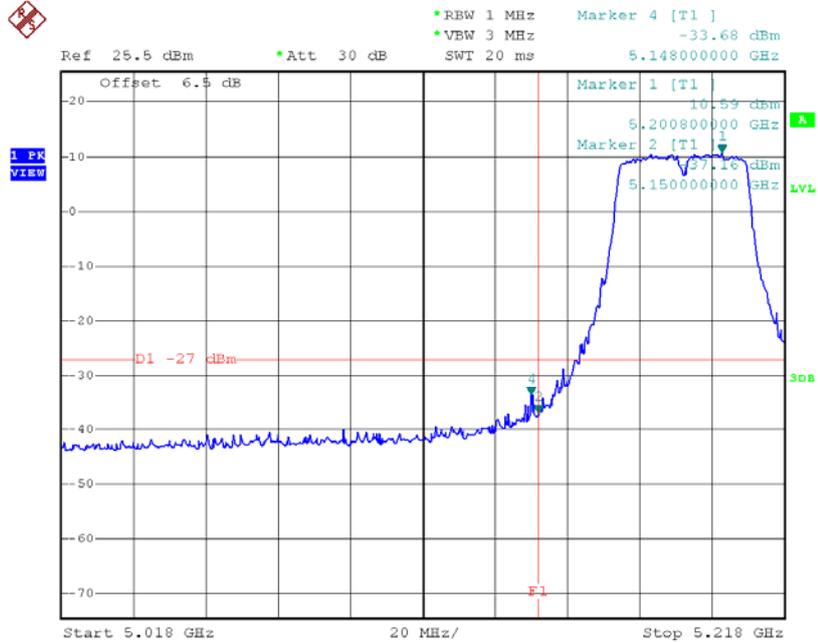

Date: 21.JUL.2015 14:26:20


TX mode CH46

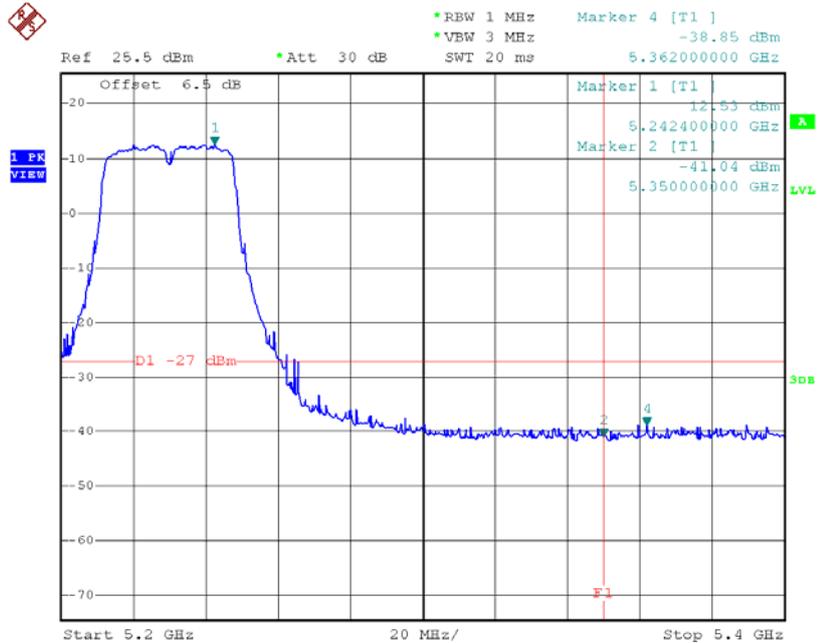

Date: 21.JUL.2015 14:28:13


Test Mode: UNII-1/TX AC40 Mode_ANT B

TX mode CH38

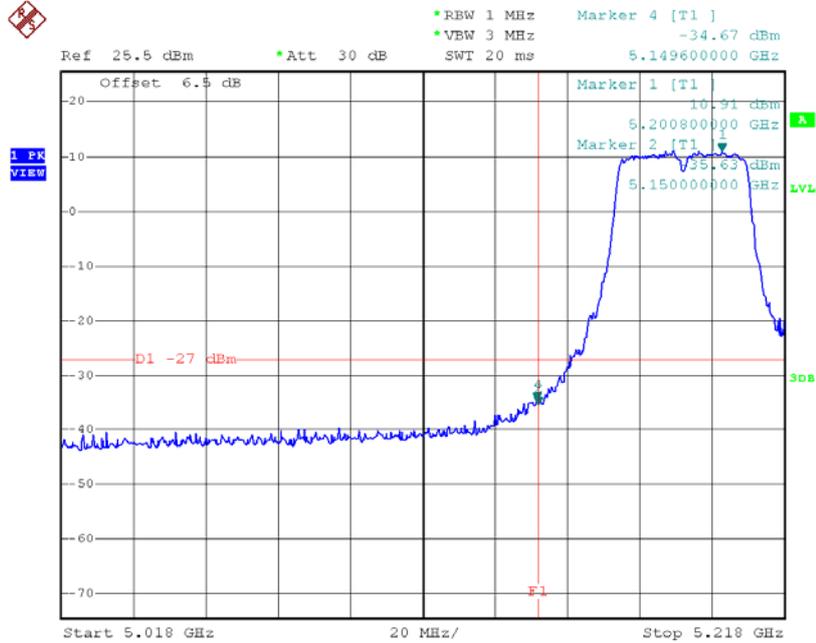

Date: 23.JUL.2015 19:21:43


TX mode CH46

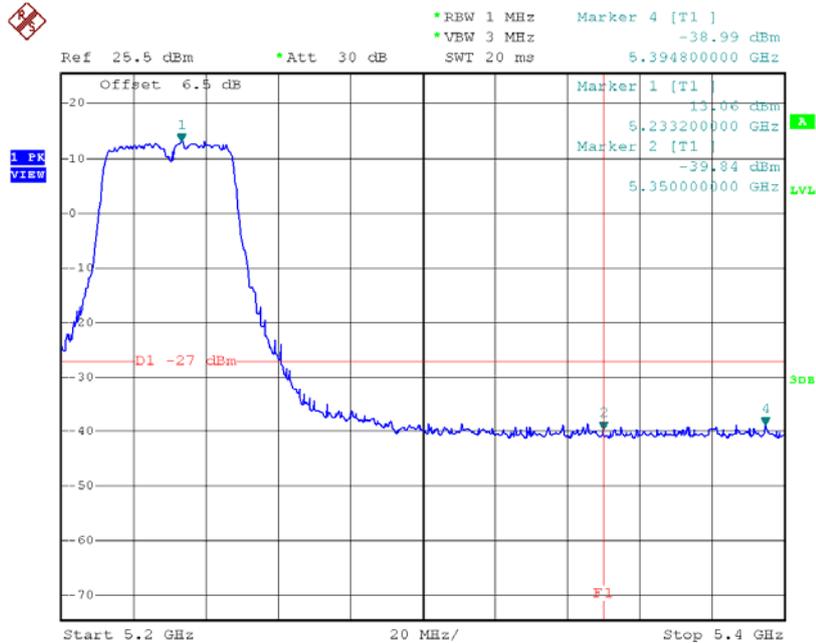


Date: 23.JUL.2015 19:23:16

Test Mode: UNII-1/TX AC80 Mode_ANT A

TX mode CH42

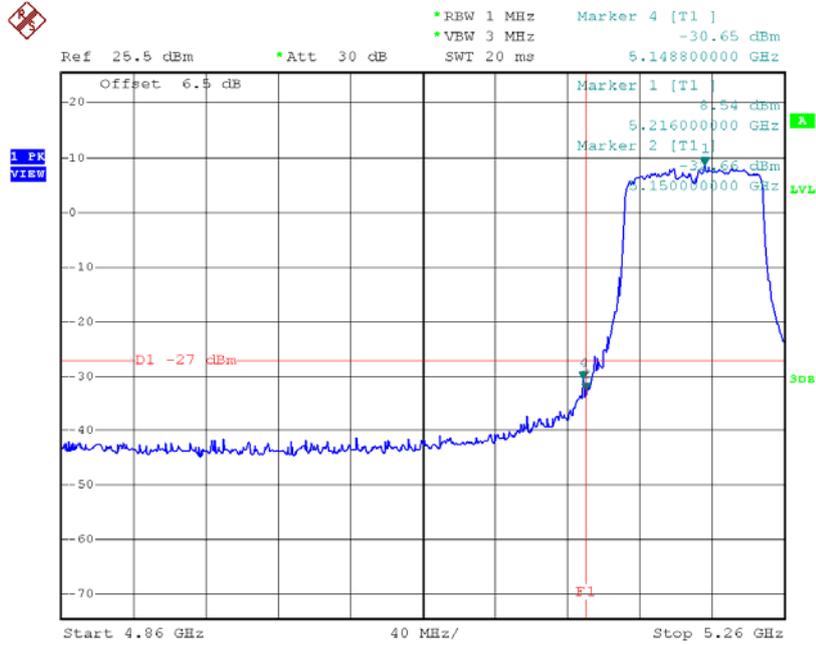


Date: 21.JUL.2015 14:42:59

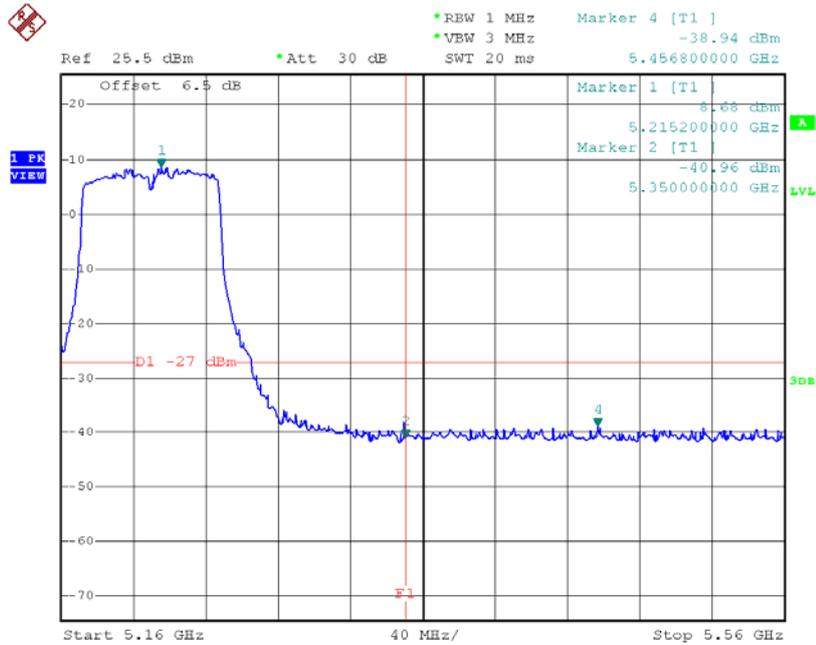


Date: 21.JUL.2015 14:43:07

Test Mode: UNII-1/TX AC80 Mode_ANT B

TX mode CH42

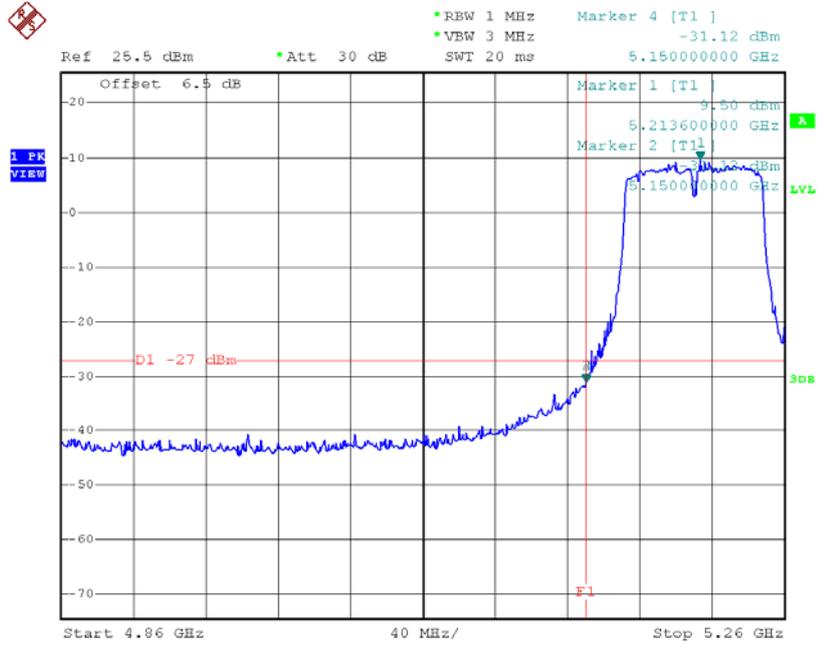


Date: 23.JUL.2015 19:34:02

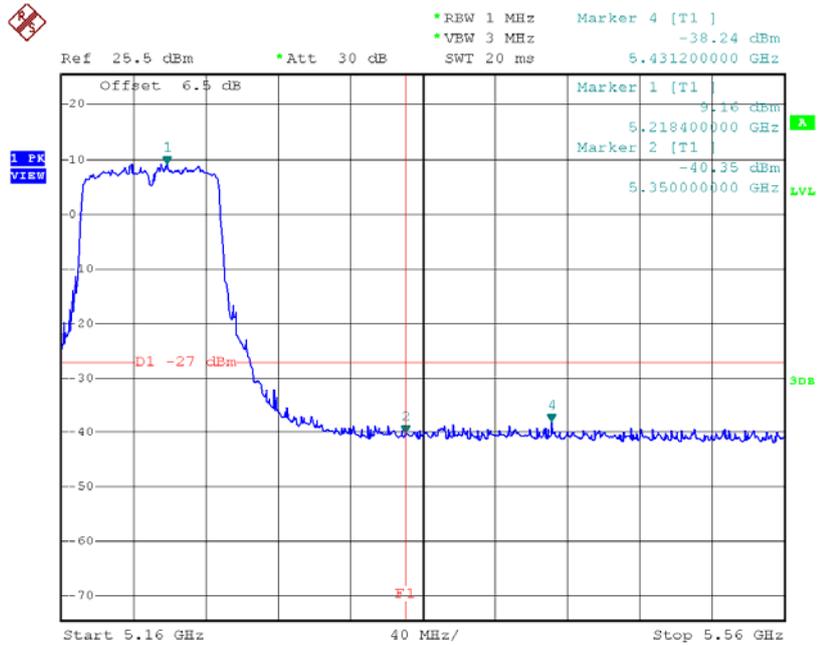

Date: 23.JUL.2015 19:34:10


Test Mode: UNII-2A/TX AC20 Mode_ANT A

TX mode CH52

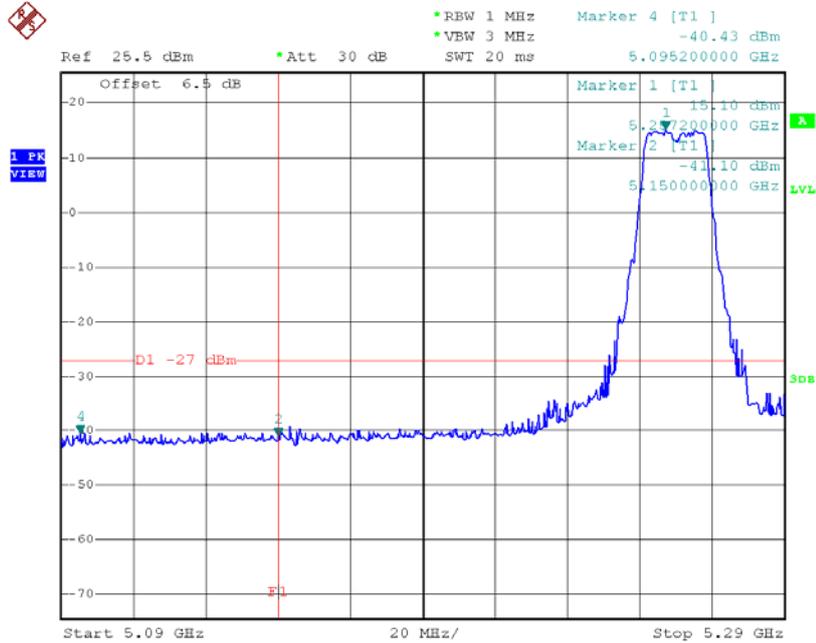

Date: 21.JUL.2015 12:22:37


TX mode CH64

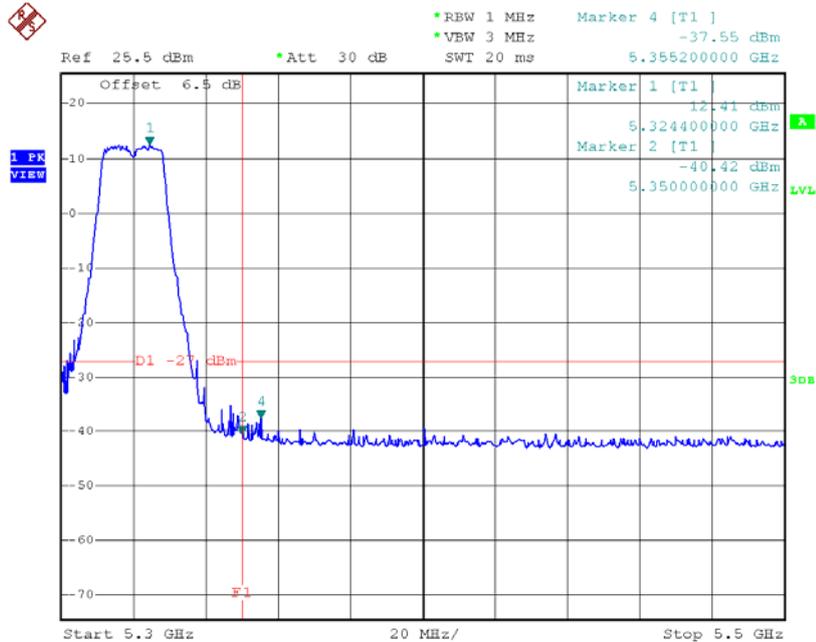

Date: 21.JUL.2015 12:25:06


Test Mode: UNII-2A/TX AC20 Mode_ANT B

TX mode CH52

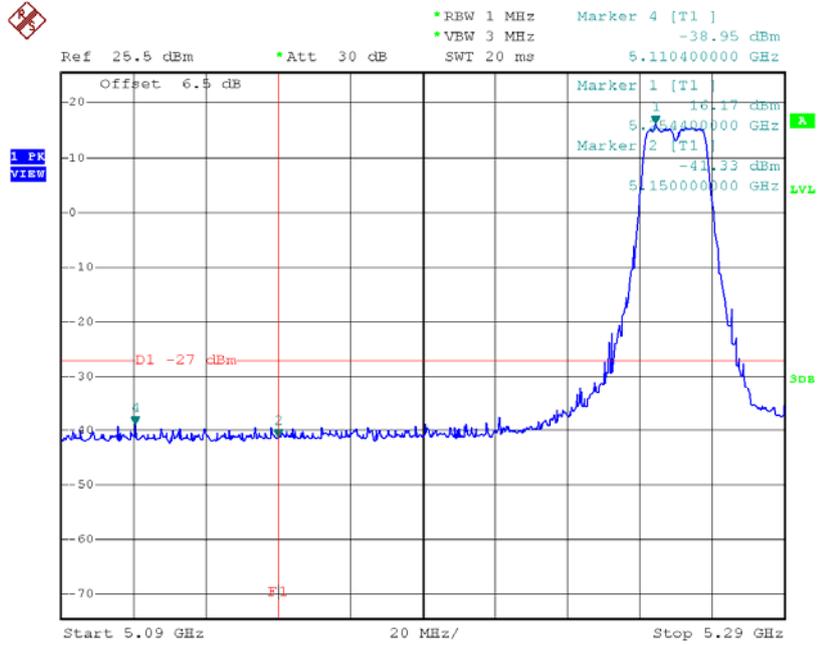

Date: 23.JUL.2015 16:19:22


TX mode CH64

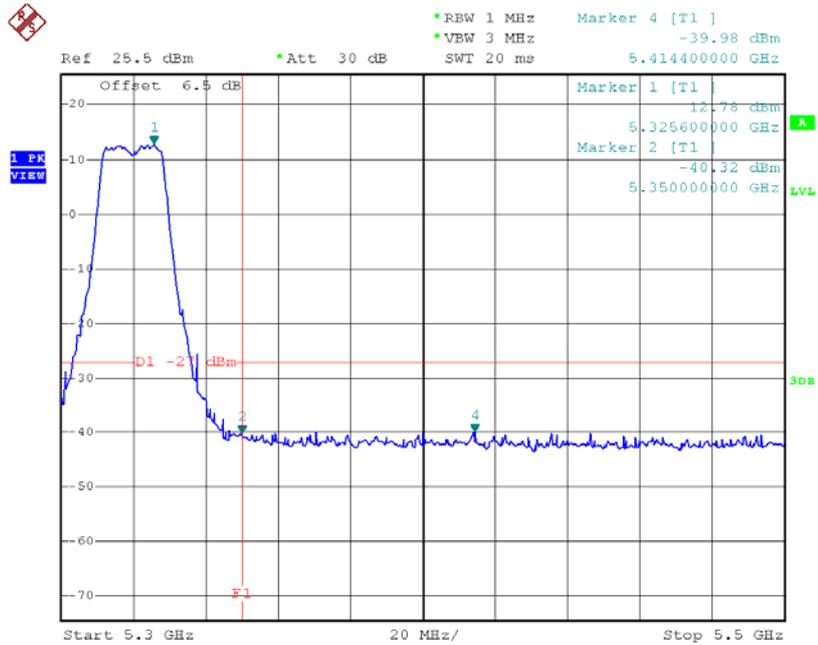

Date: 23.JUL.2015 16:21:25


Test Mode: UNII-2A/TX AC40 Mode_ANT A

TX mode CH54

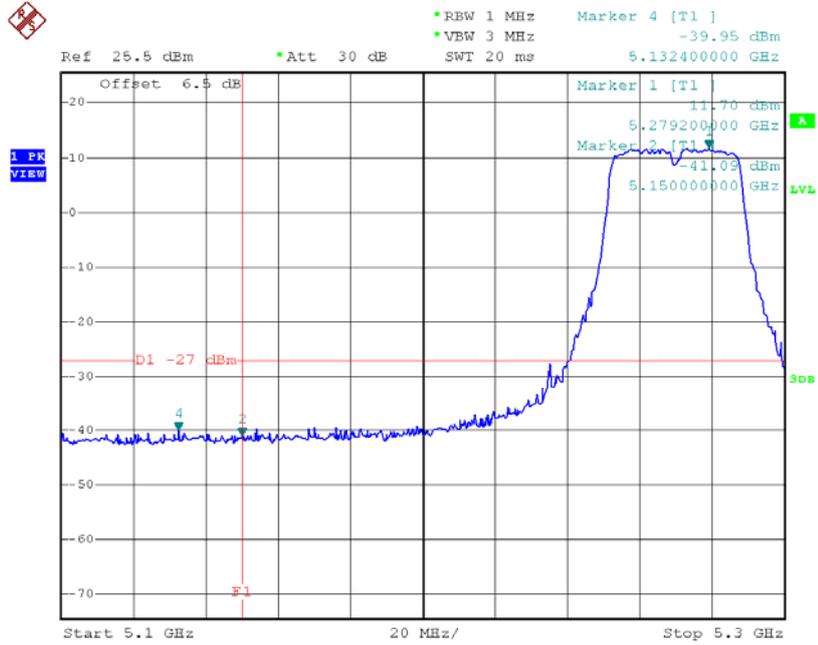

Date: 21.JUL.2015 14:29:15


TX mode CH62

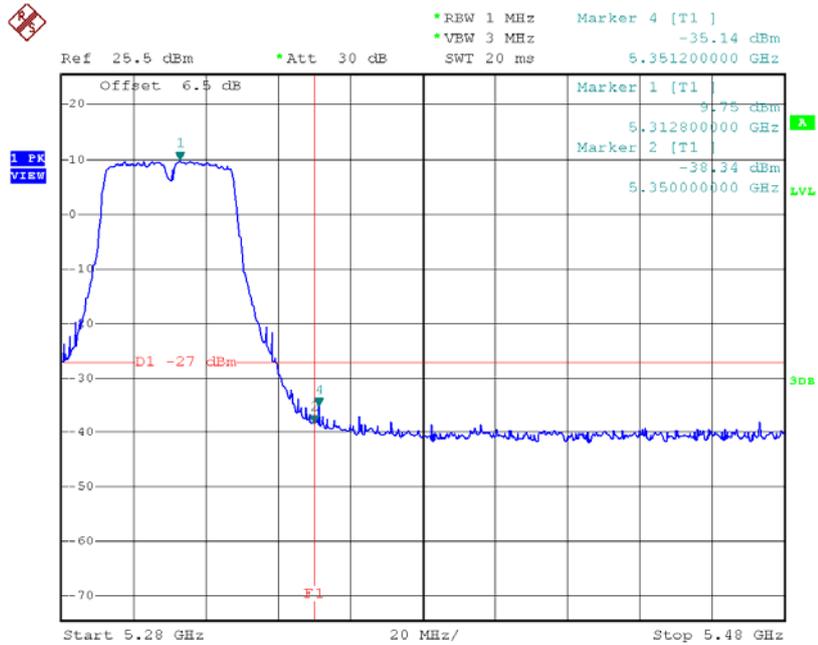

Date: 21.JUL.2015 14:30:29


Test Mode: UNII-2A/TX AC40 Mode_ANT B

TX mode CH54

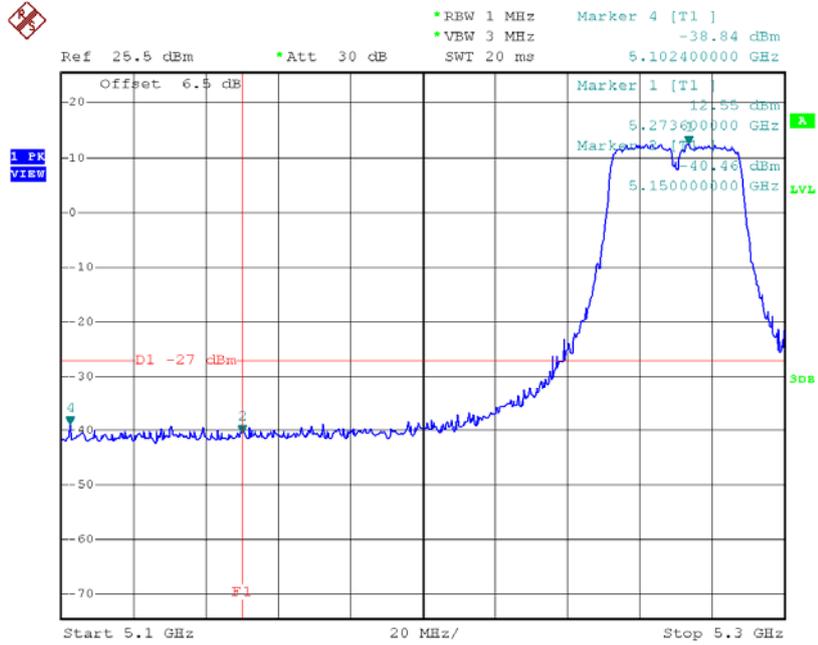

Date: 23.JUL.2015 19:24:52


TX mode CH62

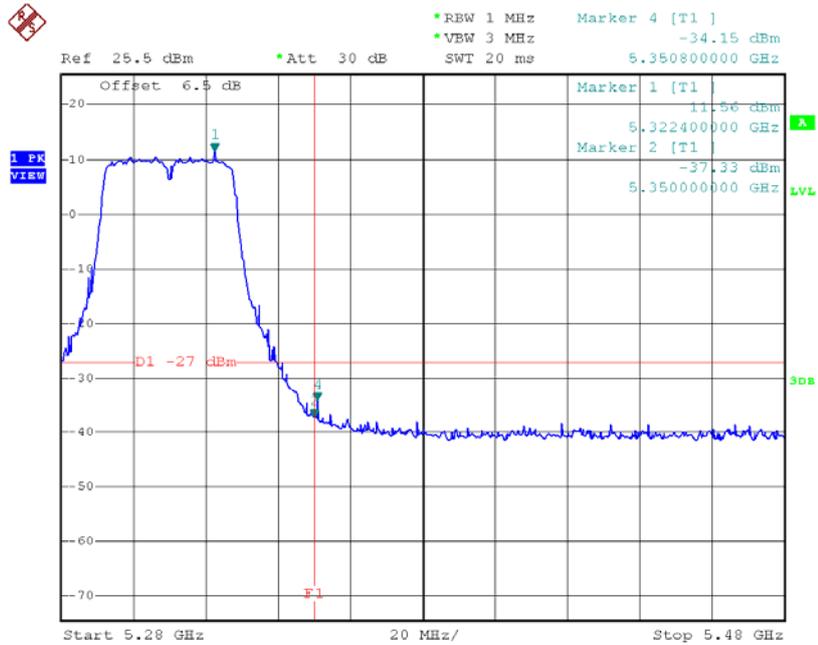


Date: 23.JUL.2015 19:25:52

Test Mode: UNII-2A/TX AC80 Mode_ANT A

TX mode CH58

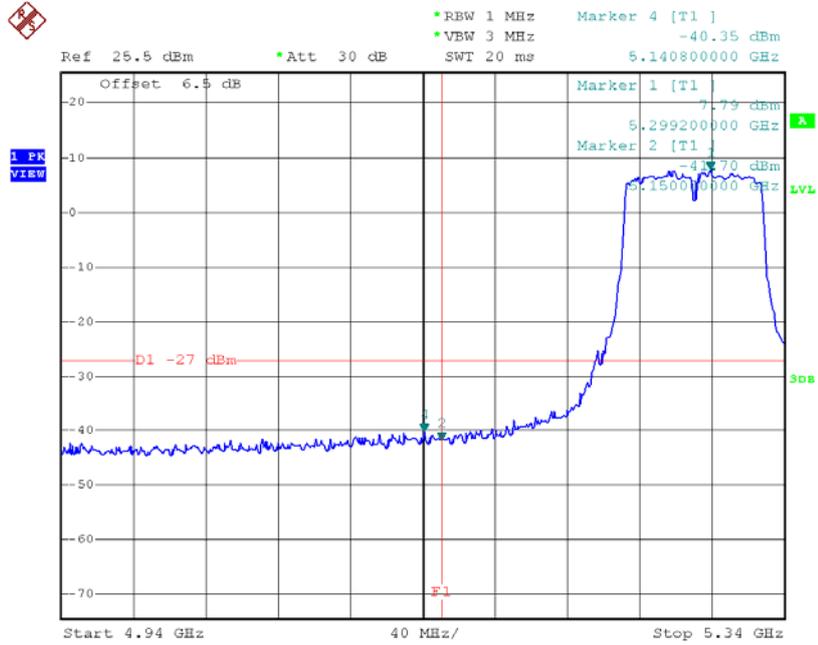


Date: 21.JUL.2015 14:44:19

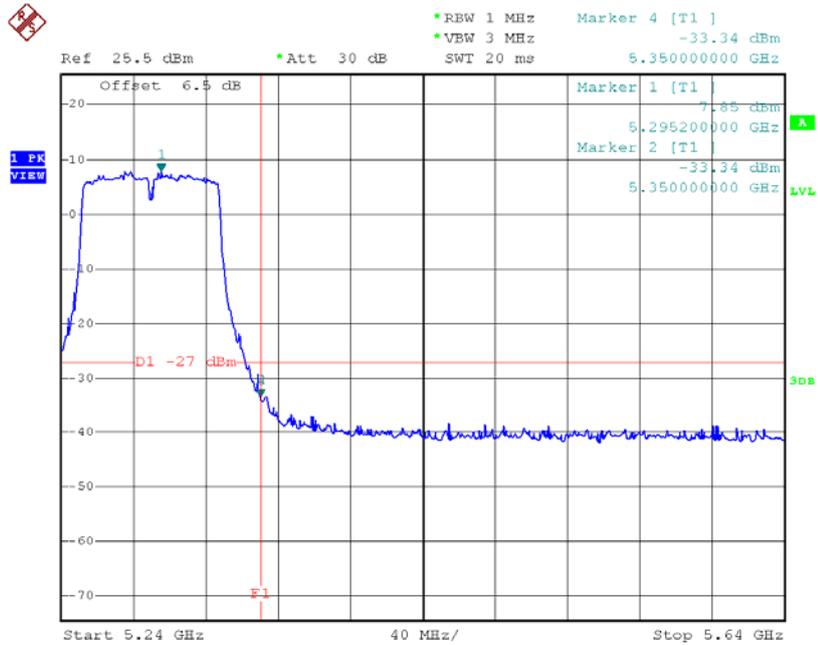


Date: 21.JUL.2015 14:44:27

Test Mode: UNII-2A/TX AC80 Mode_ANT B

TX mode CH58

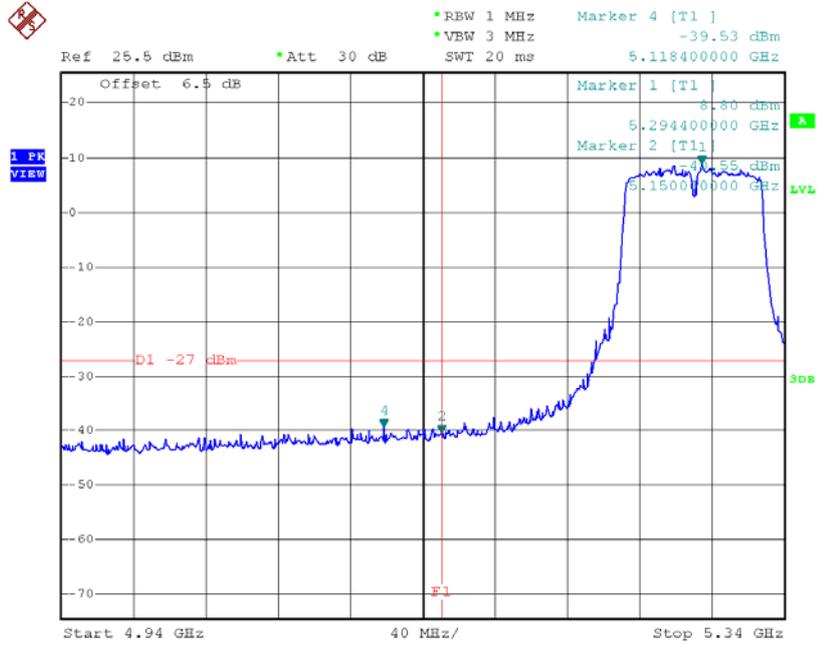


Date: 23.JUL.2015 19:35:30

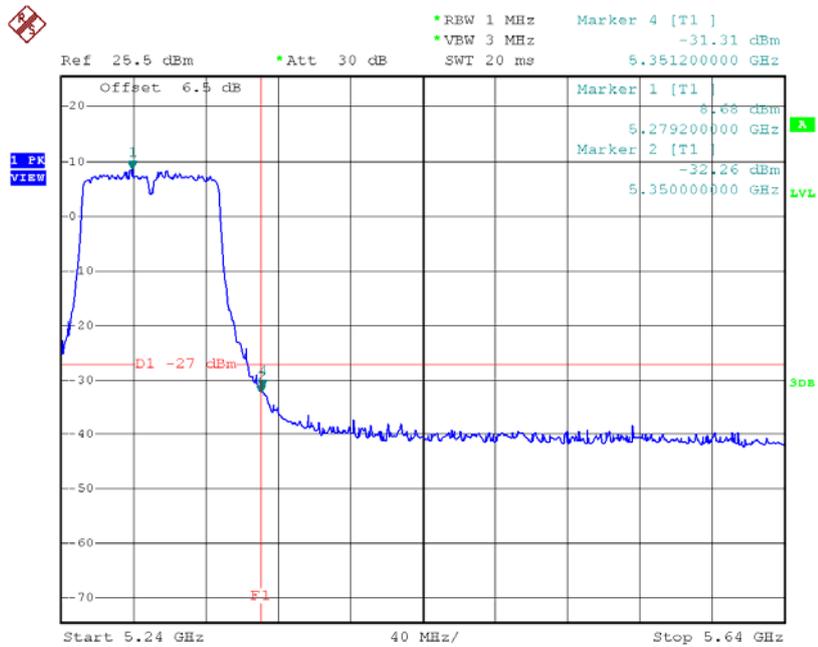

Date: 23.JUL.2015 19:35:38


Test Mode: UNII-2C/TX AC20 Mode_ANT A

TX mode CH100

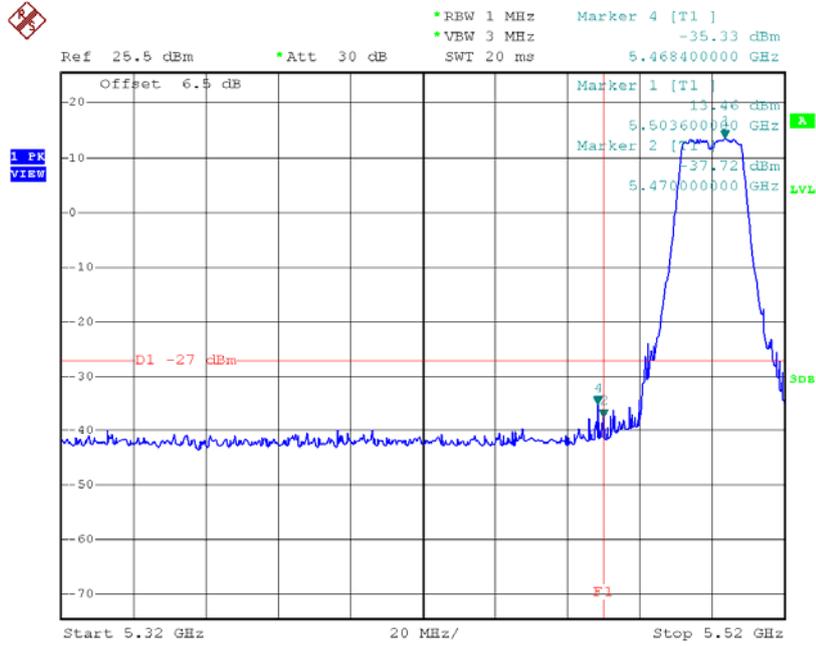

Date: 21.JUL.2015 12:26:11


TX mode CH140

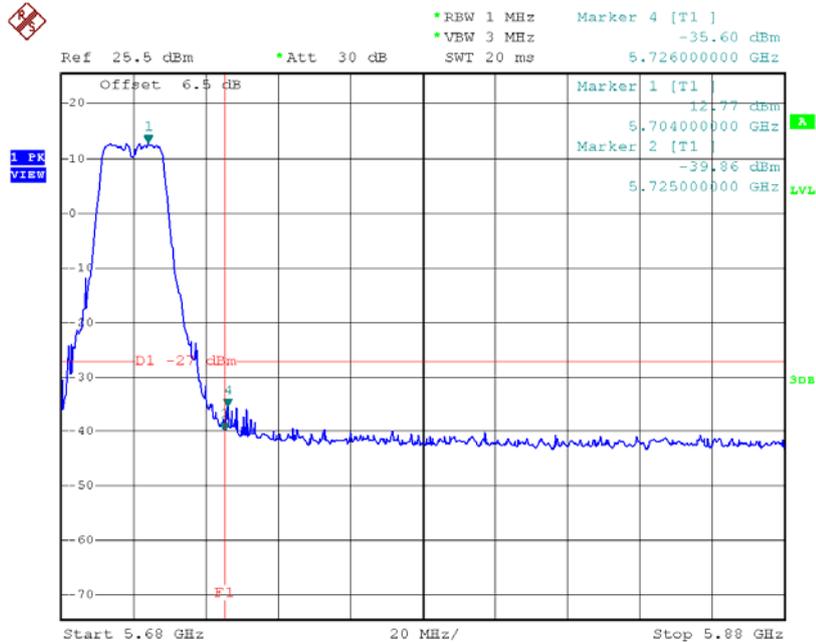

Date: 21.JUL.2015 14:04:38


Test Mode: UNII-2C/TX AC20 Mode_ANT B

TX mode CH100

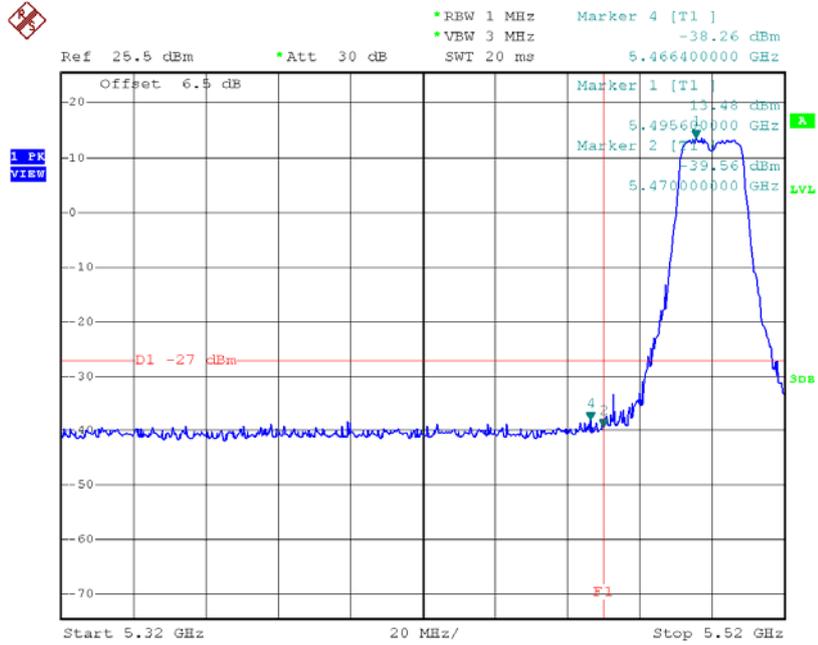

Date: 23.JUL.2015 16:24:54


TX mode CH140

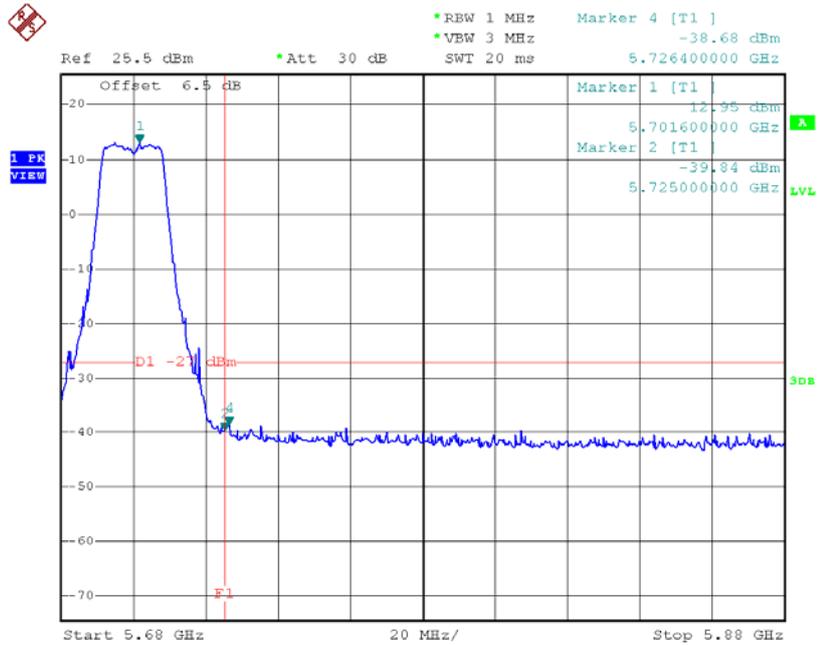

Date: 23.JUL.2015 16:27:05


Test Mode: UNII-2C/TX AC40 Mode_ANT A

TX mode CH102

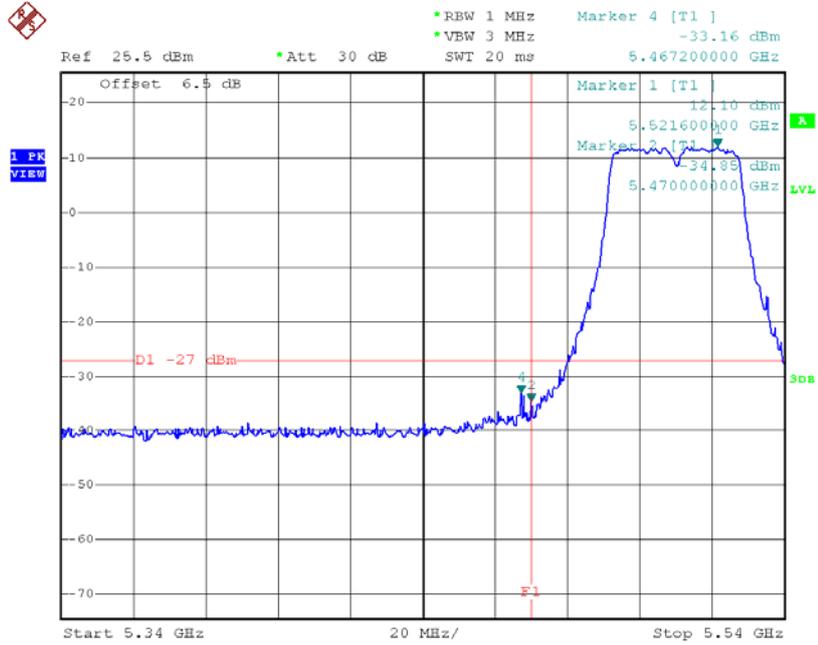

Date: 21.JUL.2015 14:31:54


TX mode CH134

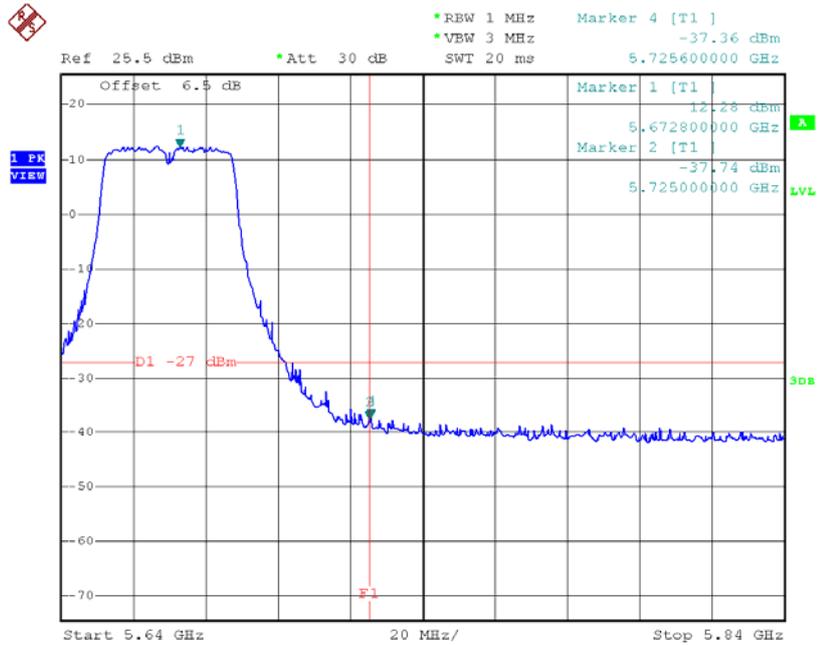

Date: 21.JUL.2015 14:34:13


Test Mode: UNII-2C/TX AC40 Mode_ANT B

TX mode CH102

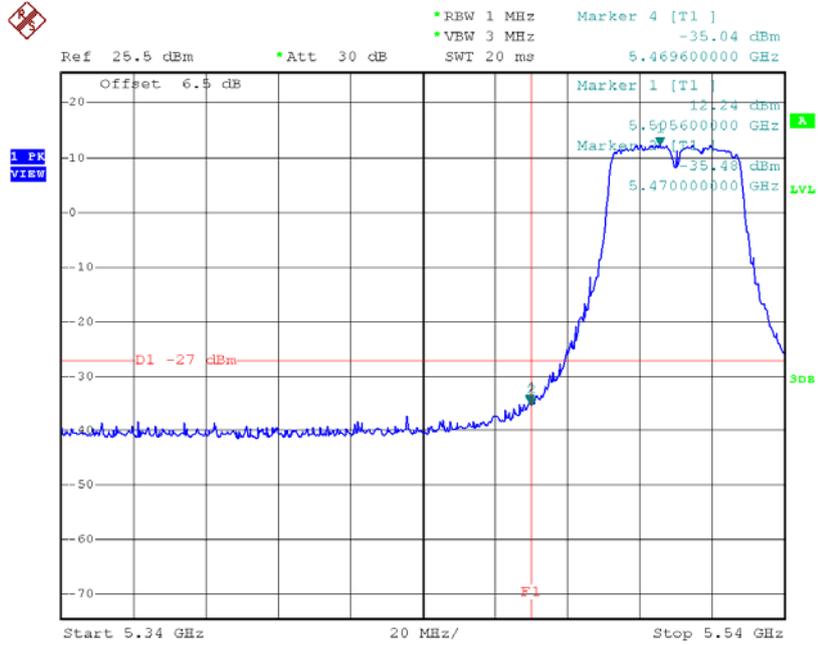

Date: 23.JUL.2015 19:27:25


TX mode CH134

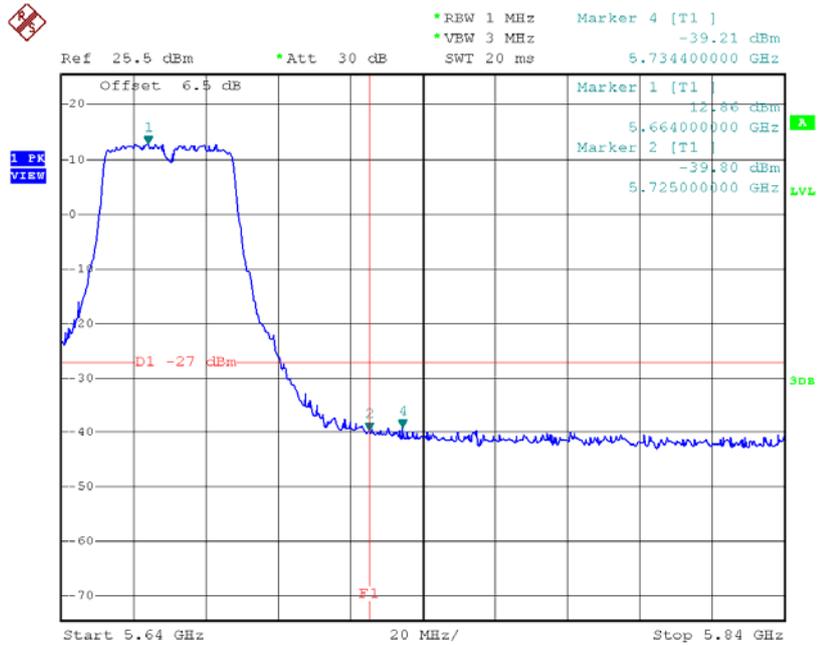

Date: 23.JUL.2015 19:29:41


Test Mode: UNII-2C/TX AC80 Mode_ANT A

TX mode CH106

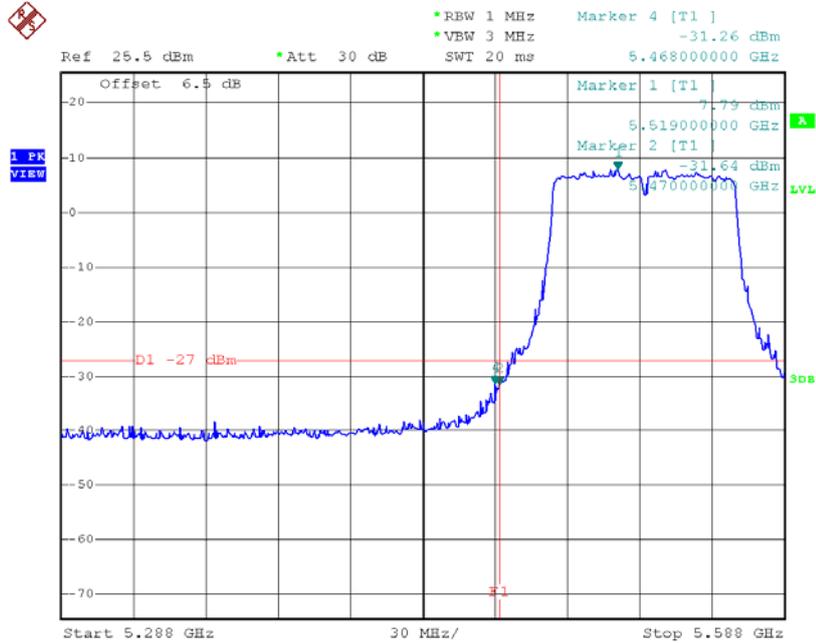

Date: 21.JUL.2015 14:45:47


TX mode CH122

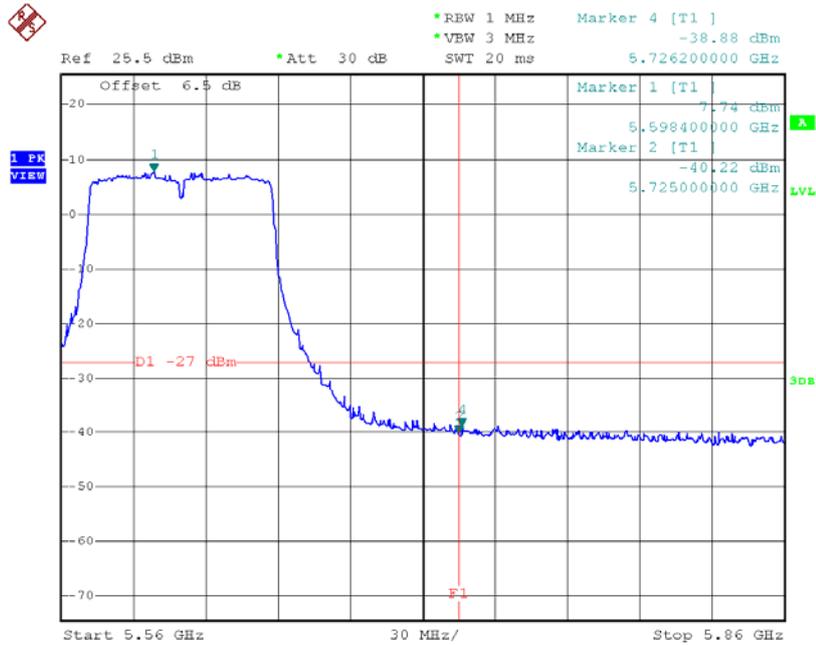

Date: 21.JUL.2015 14:47:19


Test Mode: UNII-2C/TX AC80 Mode_ANT B

TX mode CH106

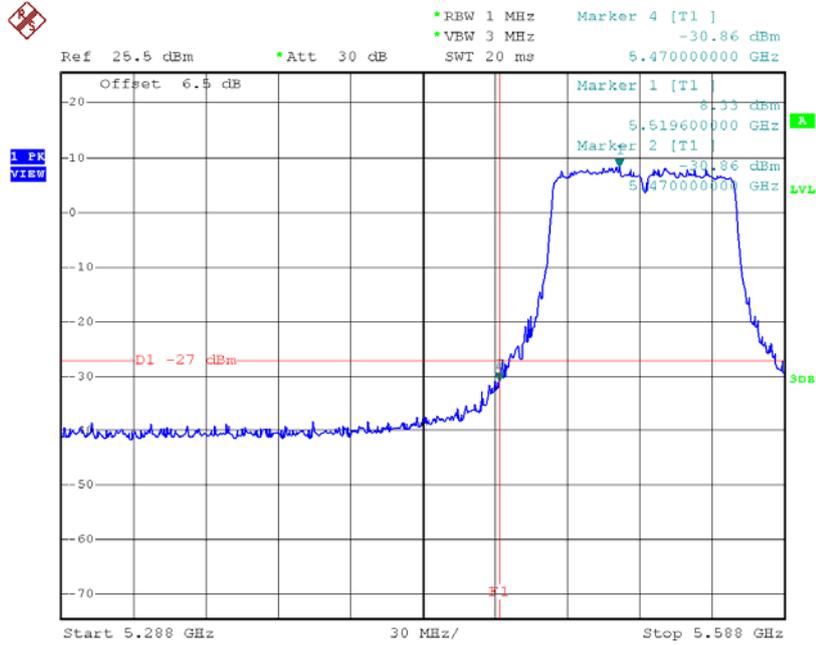

Date: 23.JUL.2015 19:36:52


TX mode CH122

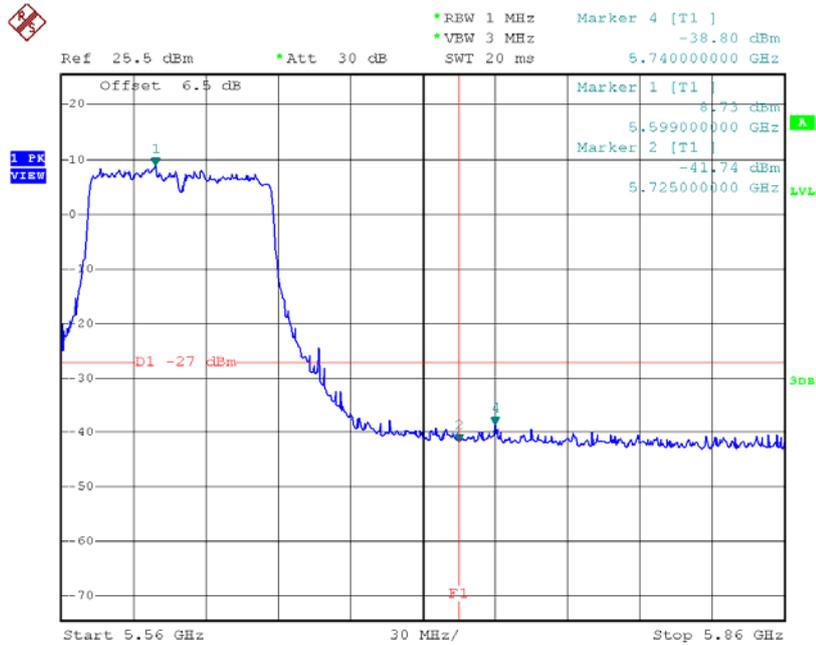

Date: 23.JUL.2015 19:39:49


Test Mode: UNII-3/TX AC20 Mode_ANT A

TX AC HT20 mode CH149

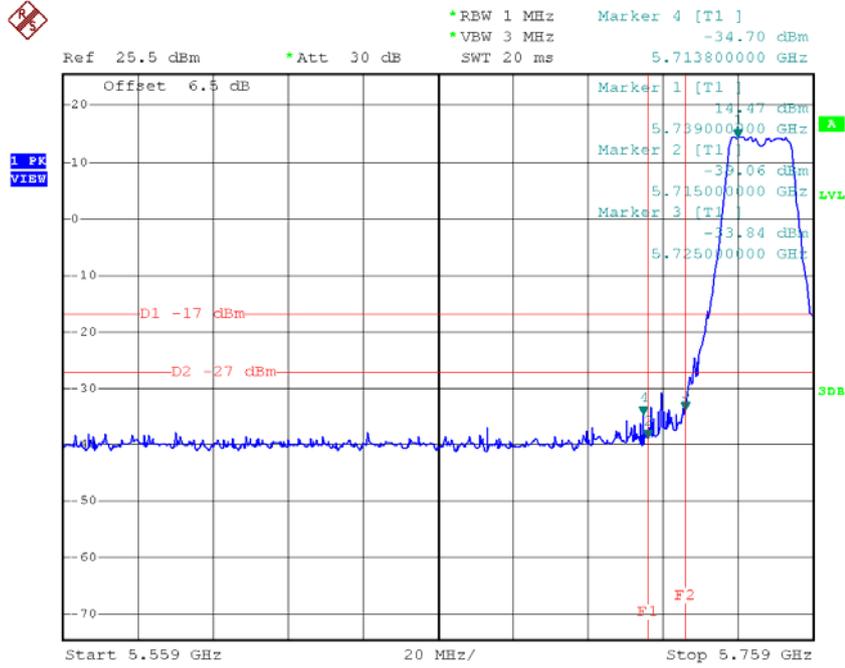

Date: 21.JUL.2015 14:05:47


TX AC HT20 mode CH165

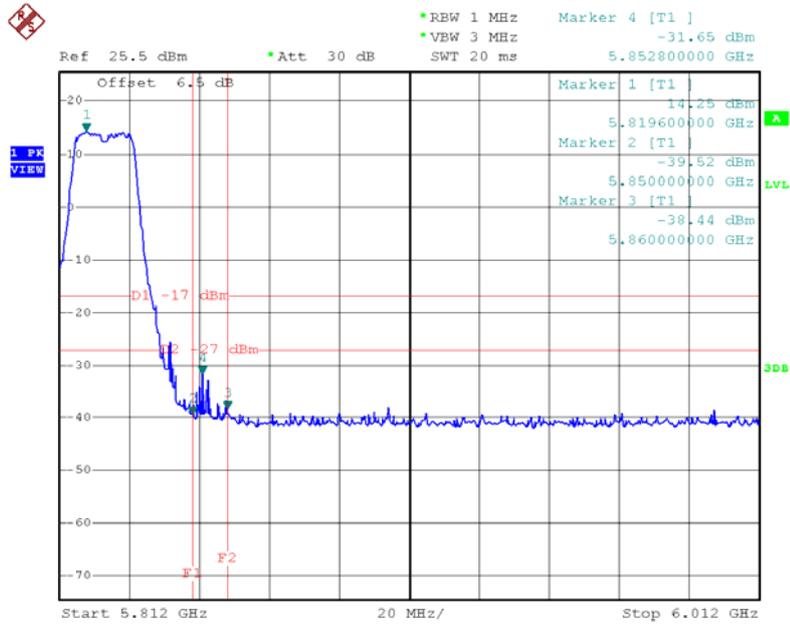

Date: 21.JUL.2015 14:08:00


Test Mode: UNII-3/TX AC20 Mode_ANT B

TX AC HT20 mode CH149

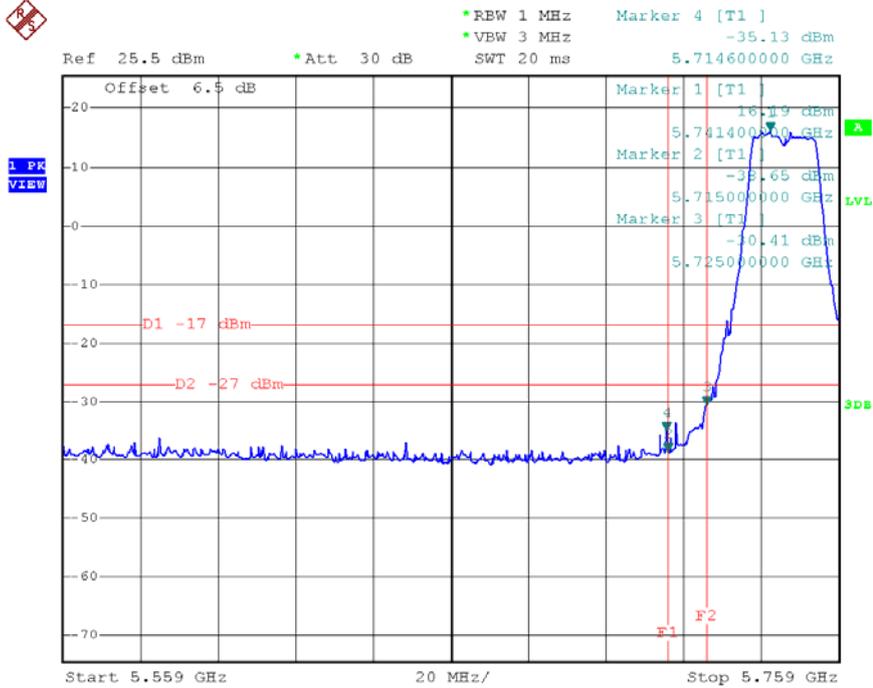

Date: 23.JUL.2015 16:28:18


TX AC HT20 mode CH165

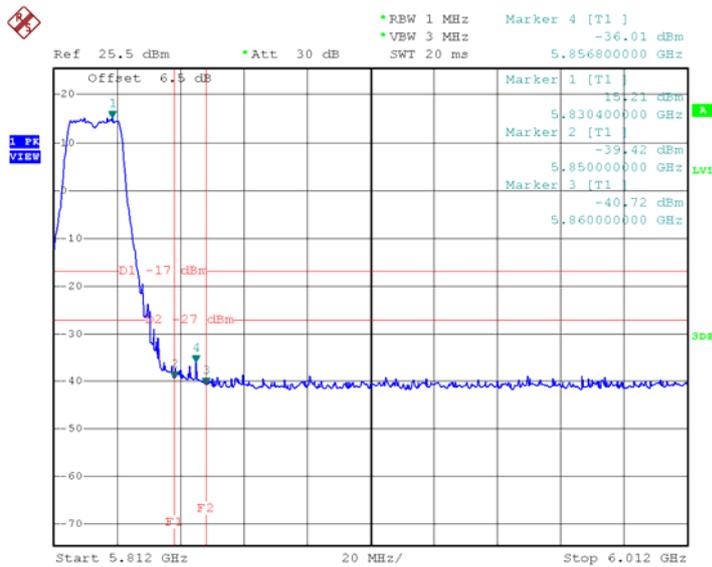

Date: 23.JUL.2015 16:30:14


Test Mode: UNII-3/TX AC40 Mode_ANT A

TX AC HT40 mode CH151

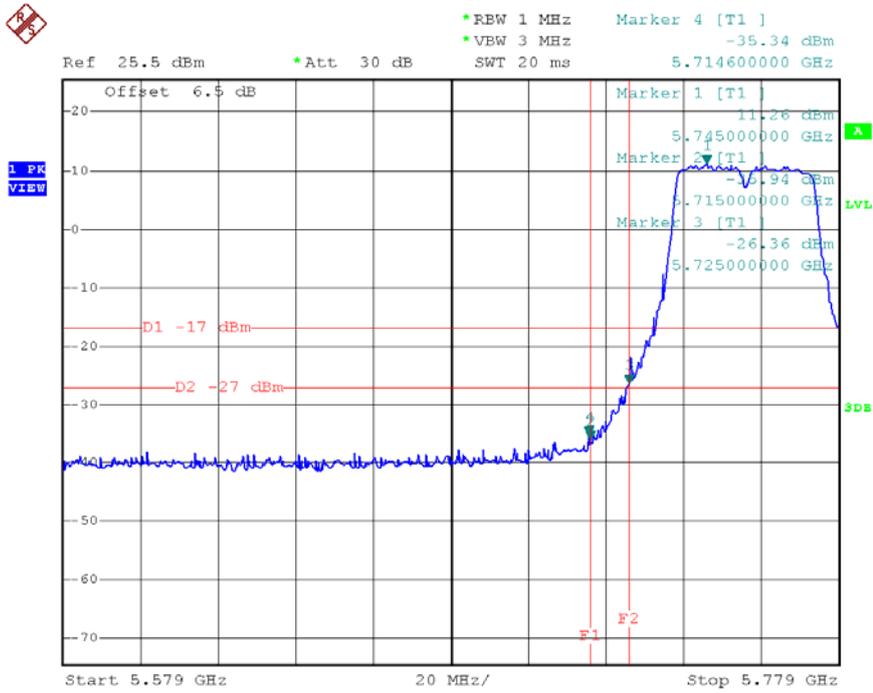

Date: 21.JUL.2015 14:35:36


TX AC HT40 mode CH159

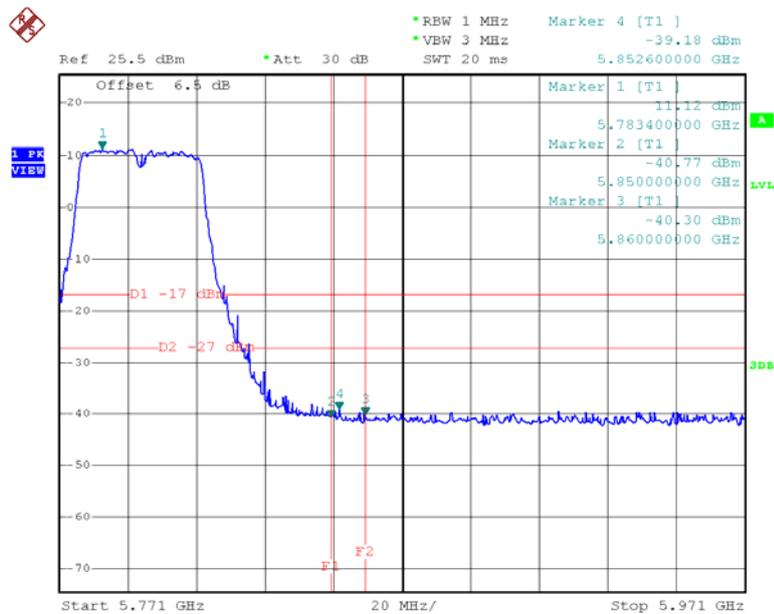

Date: 21.JUL.2015 14:36:40


Test Mode: UNII-3/TX AC40 Mode_ANT B

TX AC HT40 mode CH151

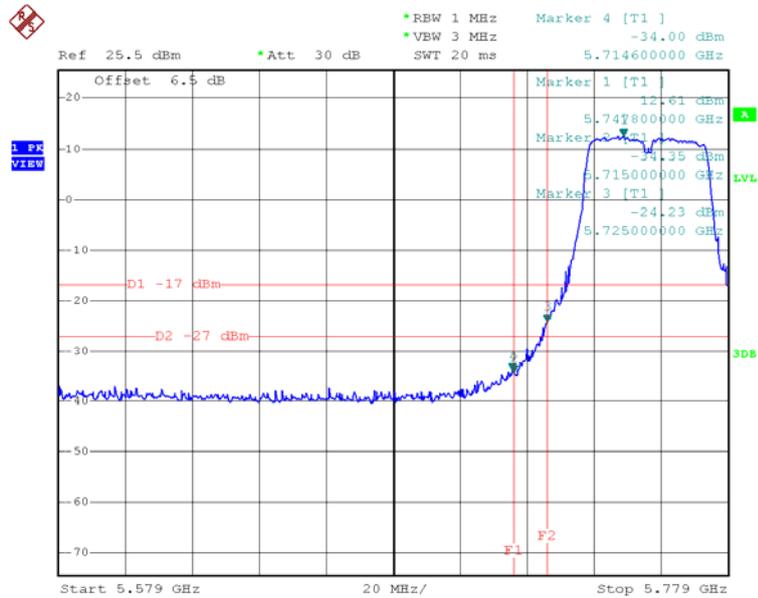

Date: 23.JUL.2015 19:31:10


TX AC HT40 mode CH159

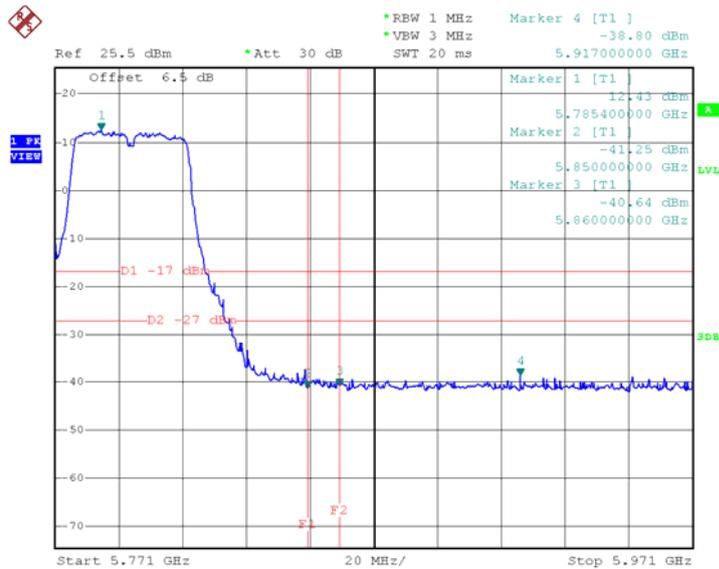


Date: 23.JUL.2015 19:32:09

Test Mode: UNII-3/TX AC80 Mode_ANT A

TX AC HT80 mode CH155

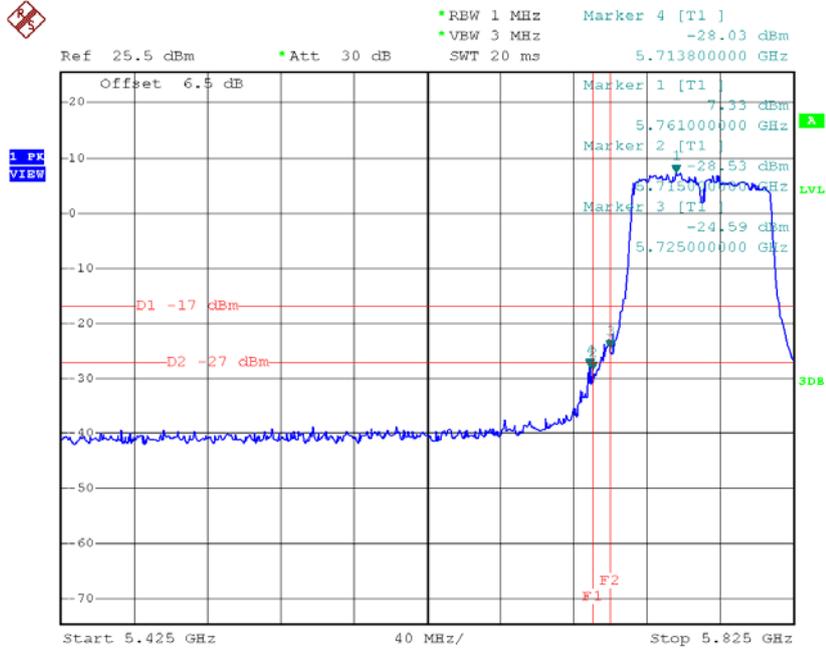


Date: 21.JUL.2015 14:49:33

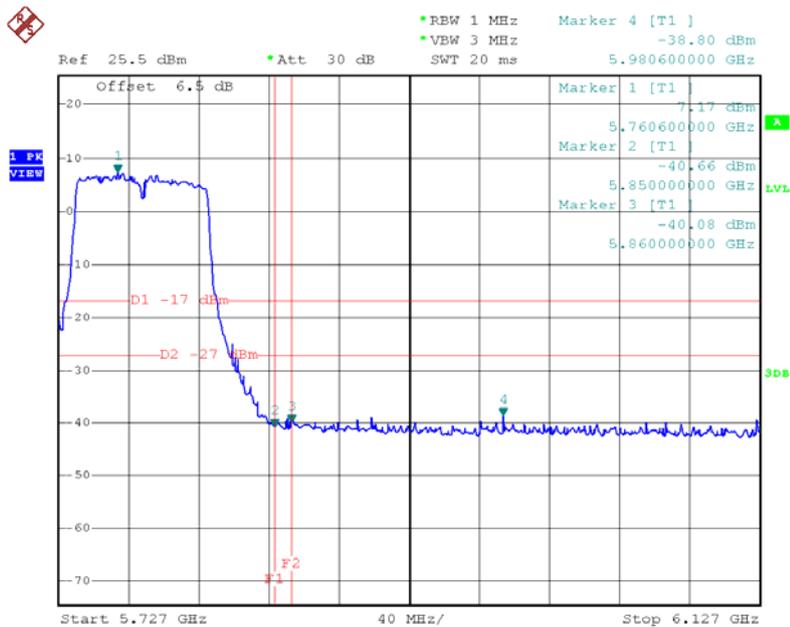


Date: 21.JUL.2015 14:49:41

Test Mode: UNII-3/TX AC80 Mode_ANT B

TX AC HT80 mode CH155

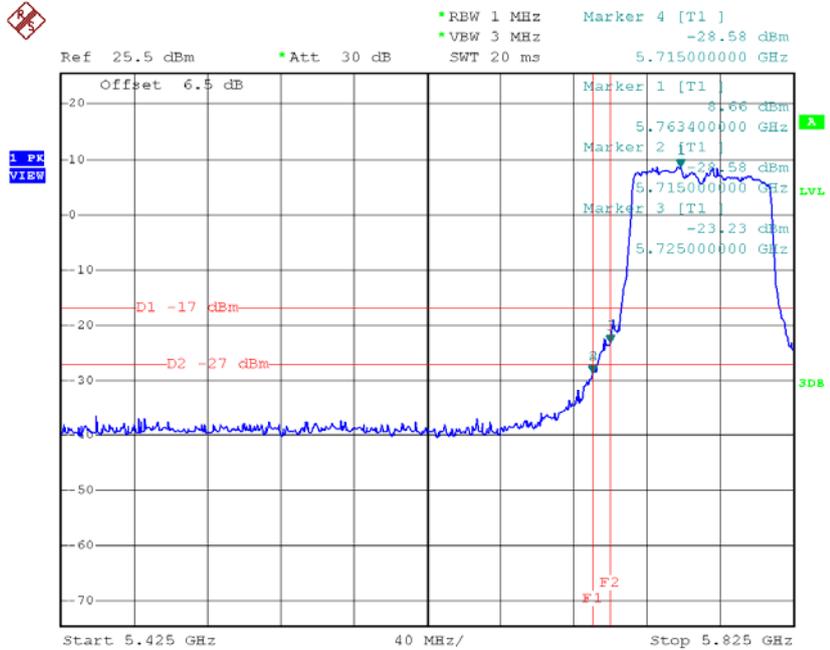

Date: 23.JUL.2015 19:41:10

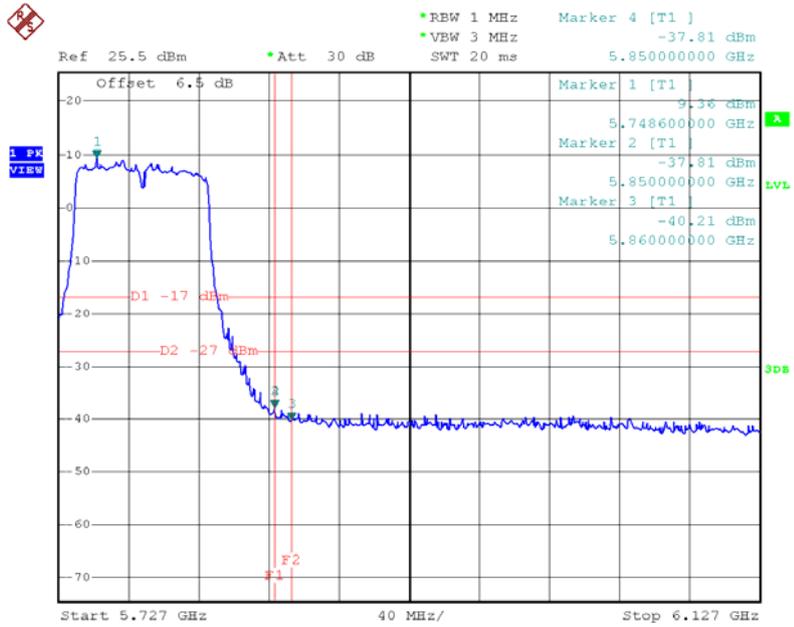


Date: 23.JUL.2015 19:41:18

For 3TX


Test Mode: UNII-1/TX A Mode_ANT A

TX mode CH36

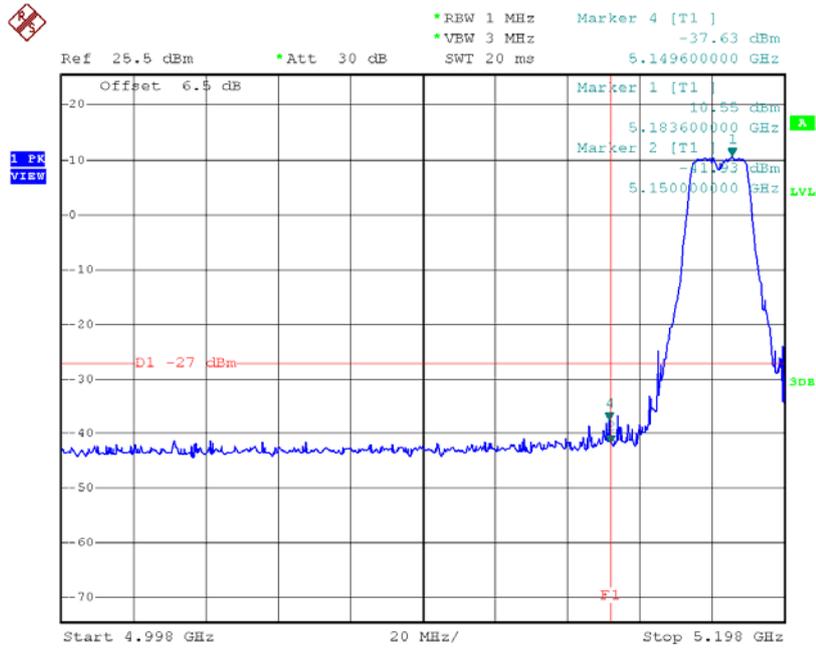

Date: 23.JUL.2015 20:25:14


TX mode CH48

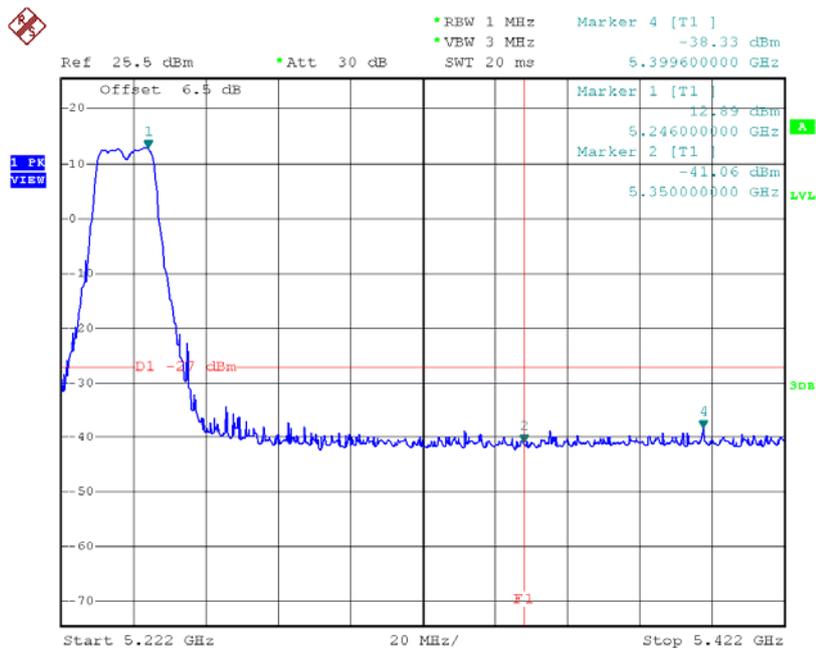

Date: 23.JUL.2015 20:30:38


Test Mode: UNII-1/TX A Mode_ANT B

TX mode CH36

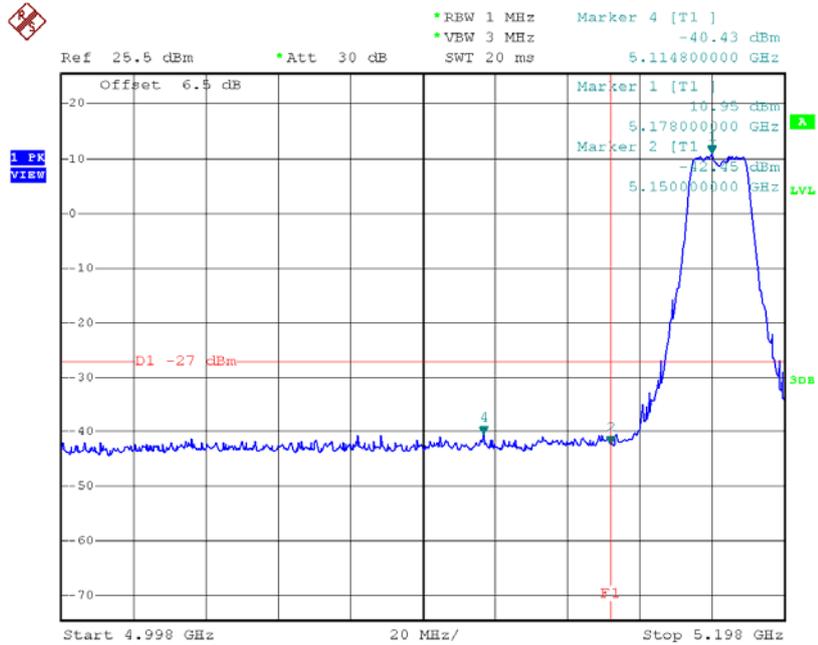

Date: 23.JUL.2015 20:52:37


TX mode CH48

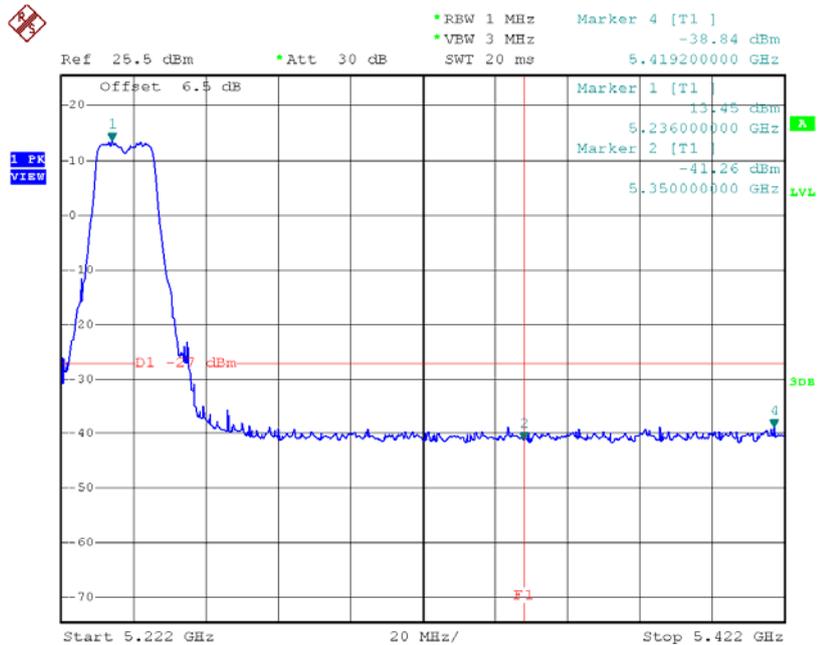

Date: 23.JUL.2015 20:57:04


Test Mode: UNII-1/TX A Mode_ANT C

TX mode CH36

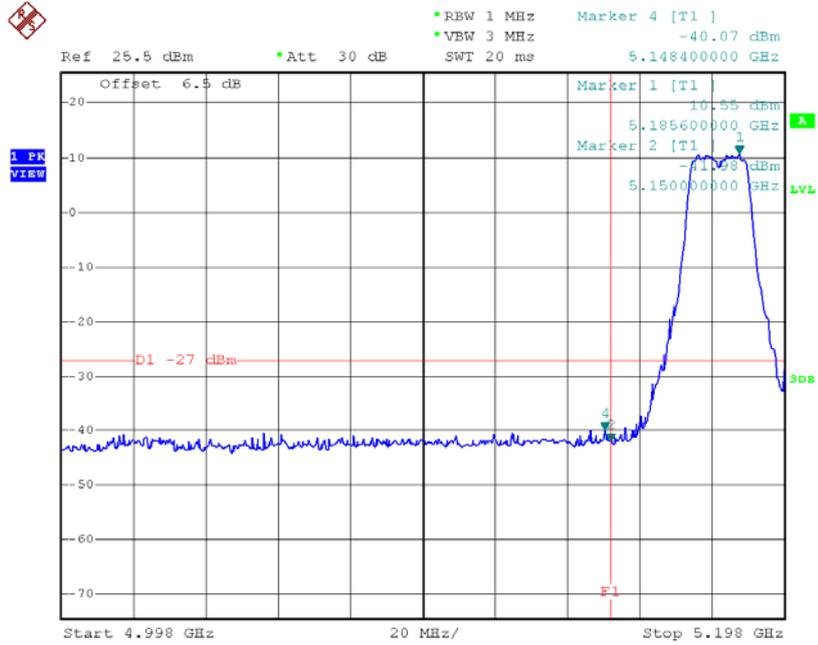

Date: 23.JUL.2015 21:16:17


TX mode CH48

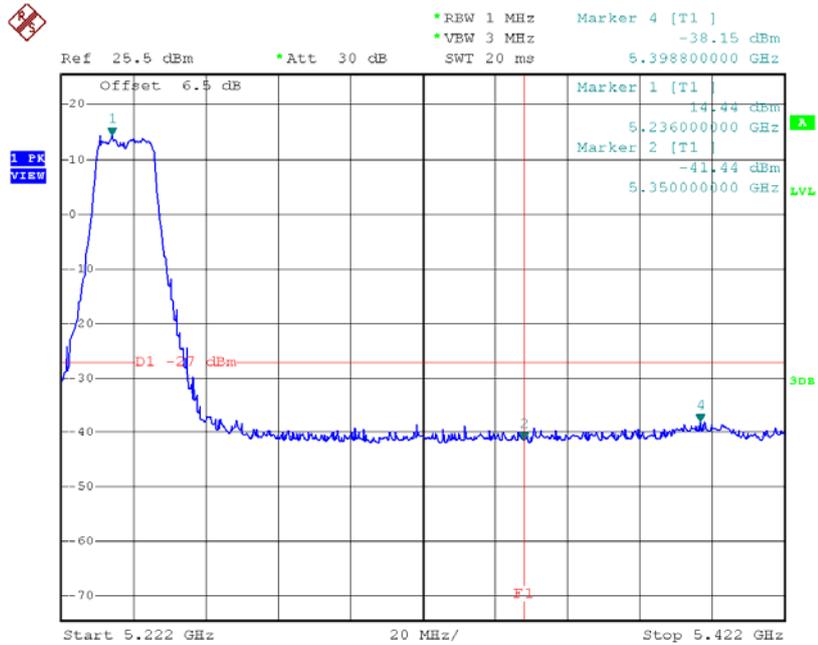

Date: 23.JUL.2015 21:19:23


Test Mode: UNII-1/TX N20 Mode_ANT A

TX mode CH36

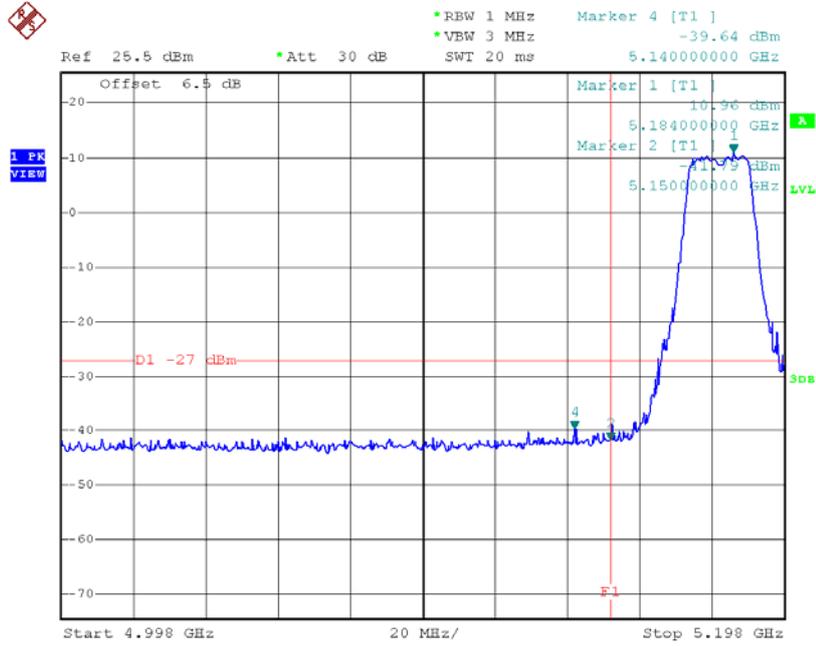

Date: 26.JUL.2015 11:09:08


TX mode CH48

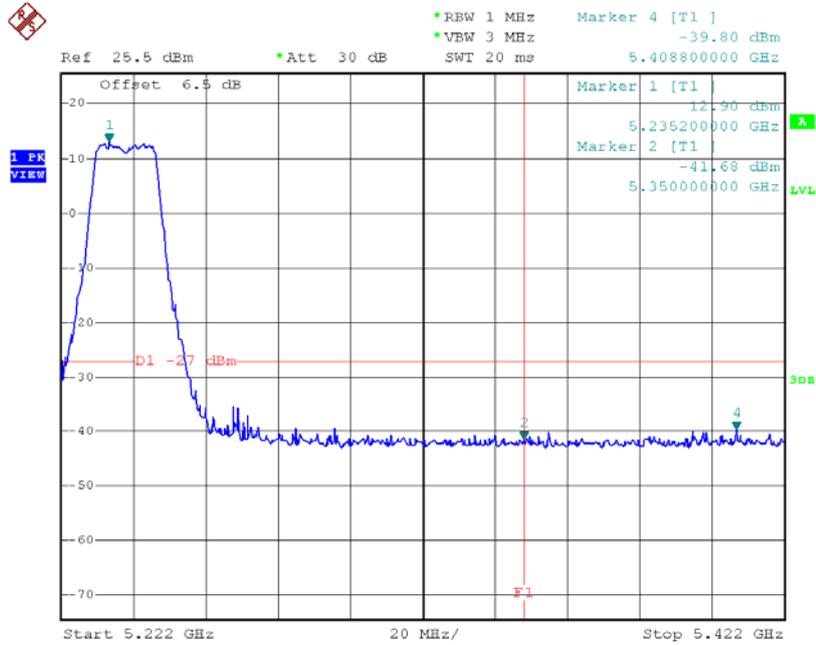

Date: 26.JUL.2015 11:14:07


Test Mode: UNII-1/TX N20 Mode_ANT B

TX mode CH36

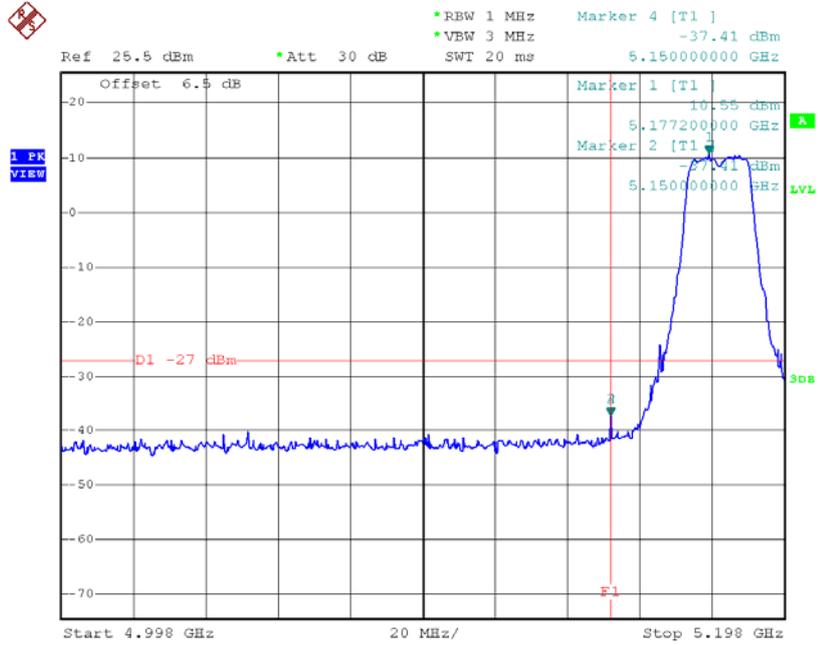

Date: 26.JUL.2015 11:27:41


TX mode CH48

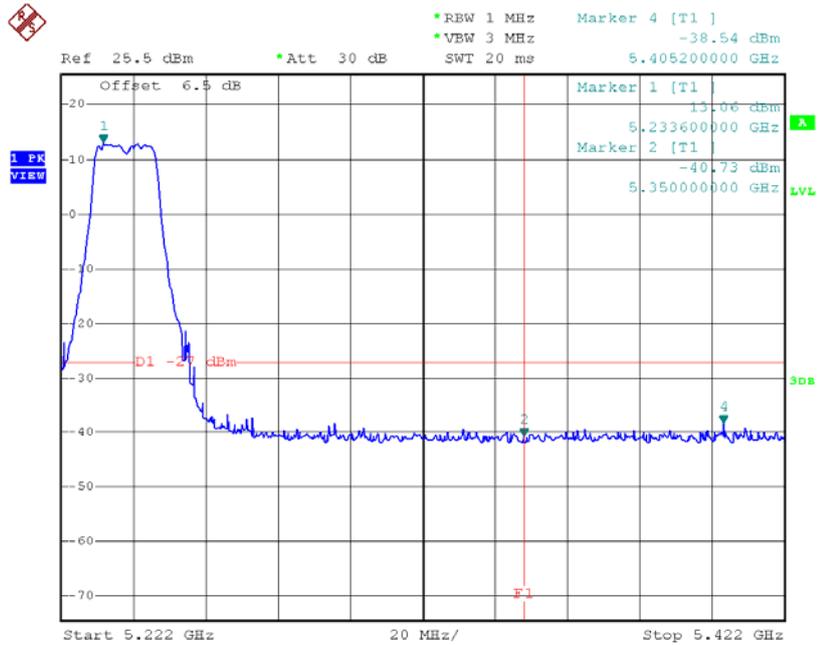

Date: 26.JUL.2015 11:30:06


Test Mode: UNII-1/TX N20 Mode_ANT C

TX mode CH36

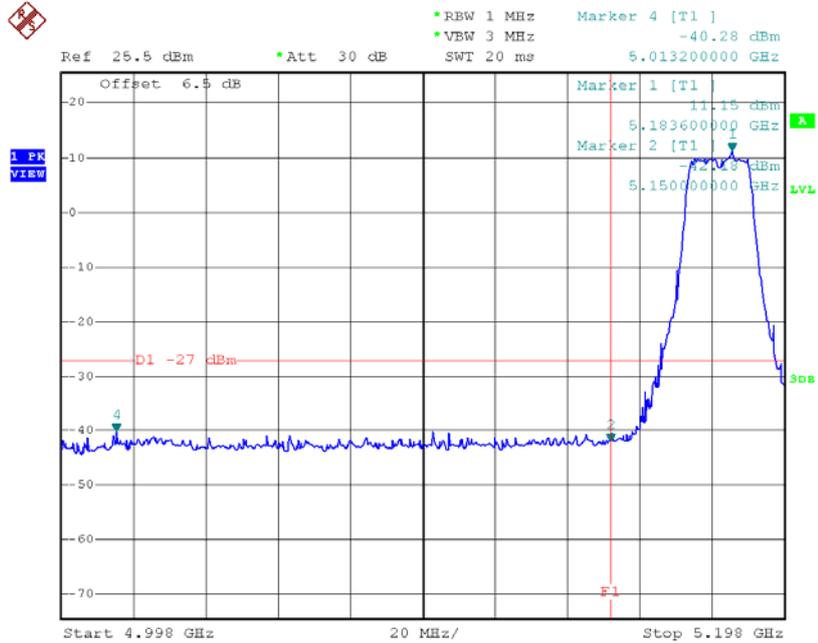

Date: 26.JUL.2015 11:41:37


TX mode CH48

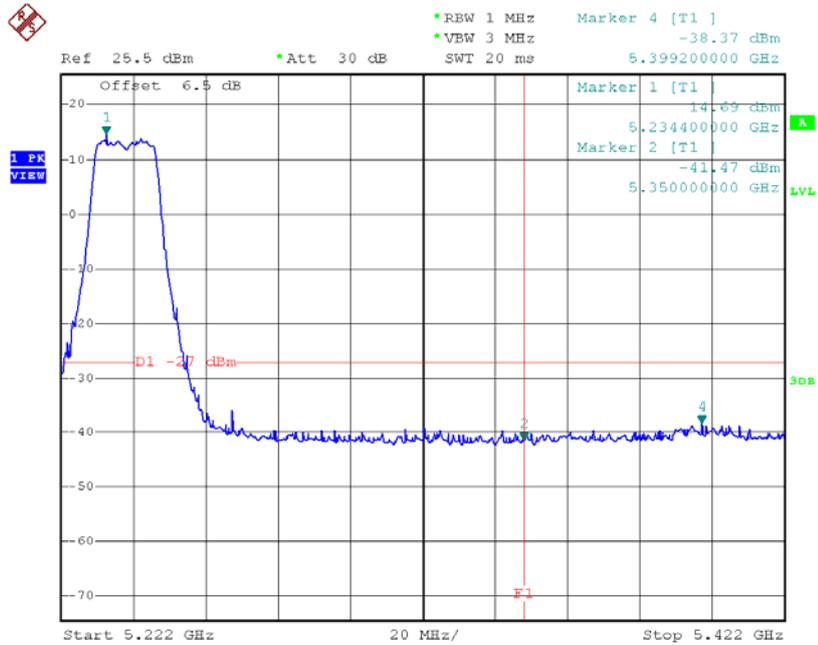

Date: 26.JUL.2015 11:43:30


Test Mode: UNII-1/TX N40 Mode_ANT A

TX mode CH38

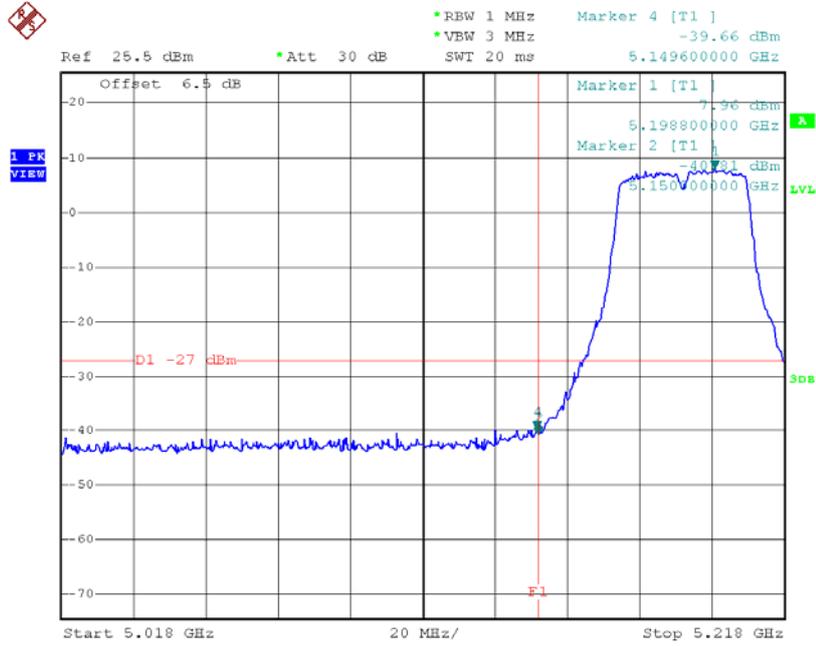

Date: 26.JUL.2015 13:39:53


TX mode CH46

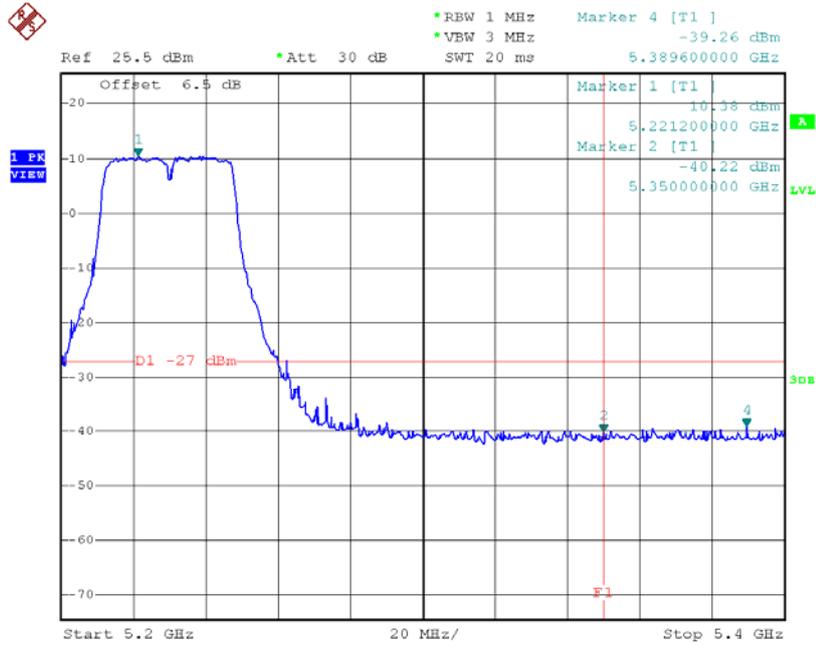

Date: 26.JUL.2015 13:41:29


Test Mode: UNII-1/TX N40 Mode_ANT B

TX mode CH38

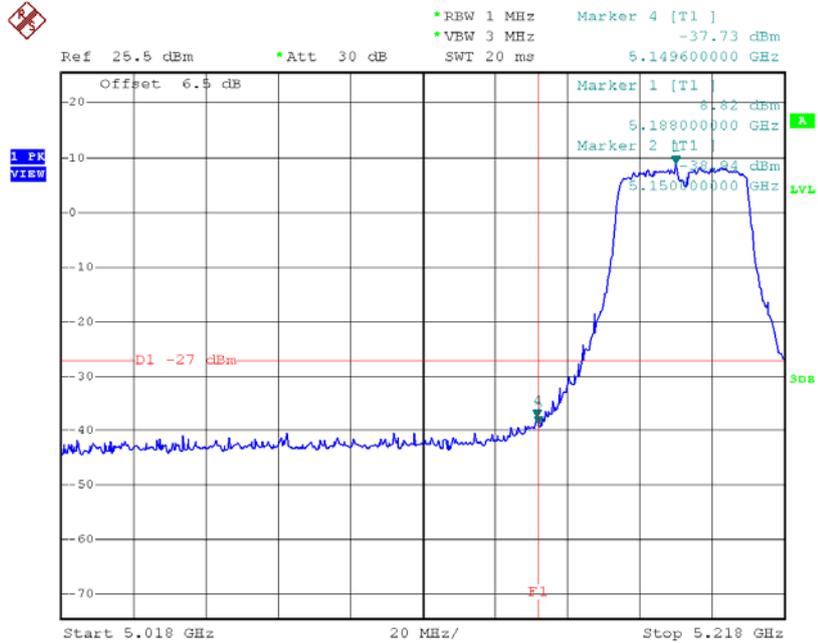

Date: 26.JUL.2015 13:51:10


TX mode CH46

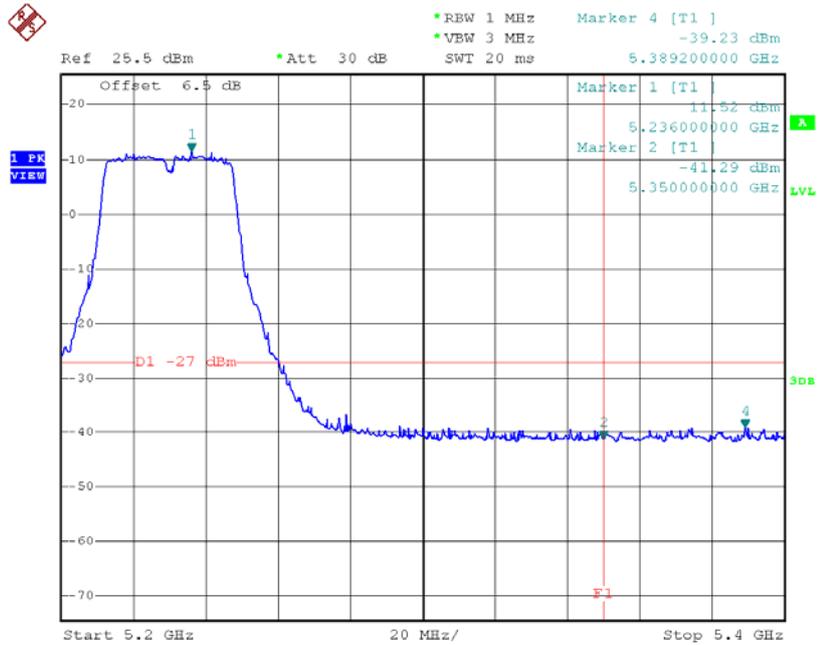

Date: 26.JUL.2015 13:52:12


Test Mode: UNII-1/TX N40 Mode_ANT C

TX mode CH38

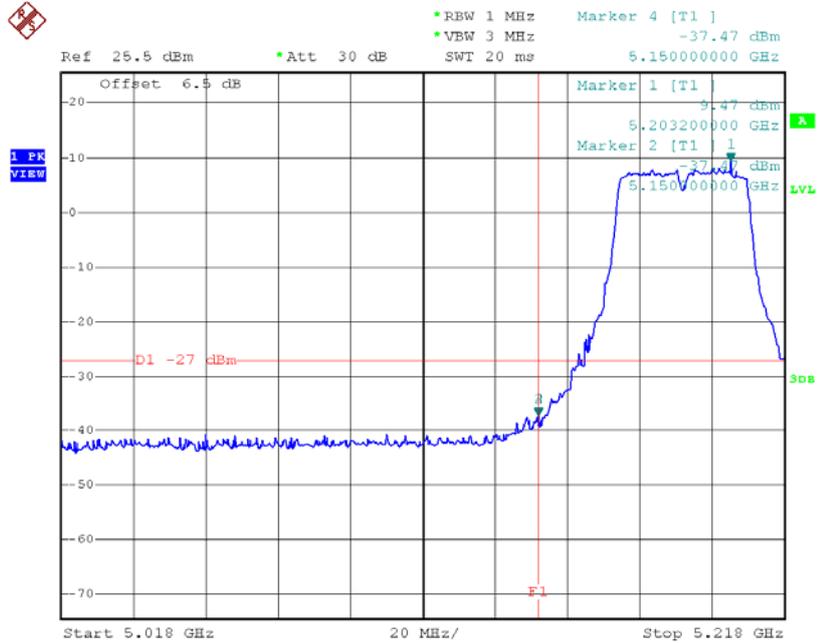

Date: 26.JUL.2015 14:00:55


TX mode CH46

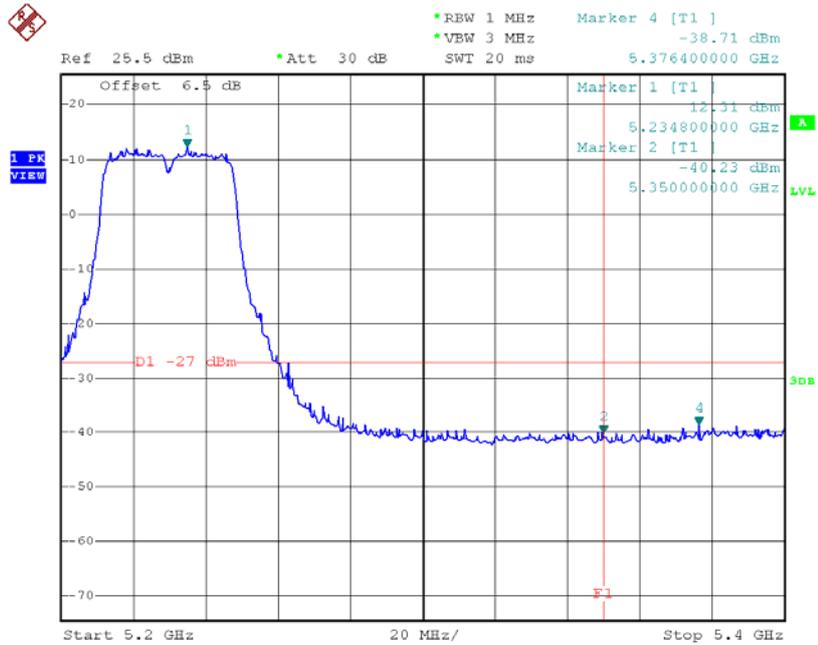

Date: 26.JUL.2015 14:02:03


Test Mode: UNII-2A/TX A Mode_ANT A

TX mode CH52

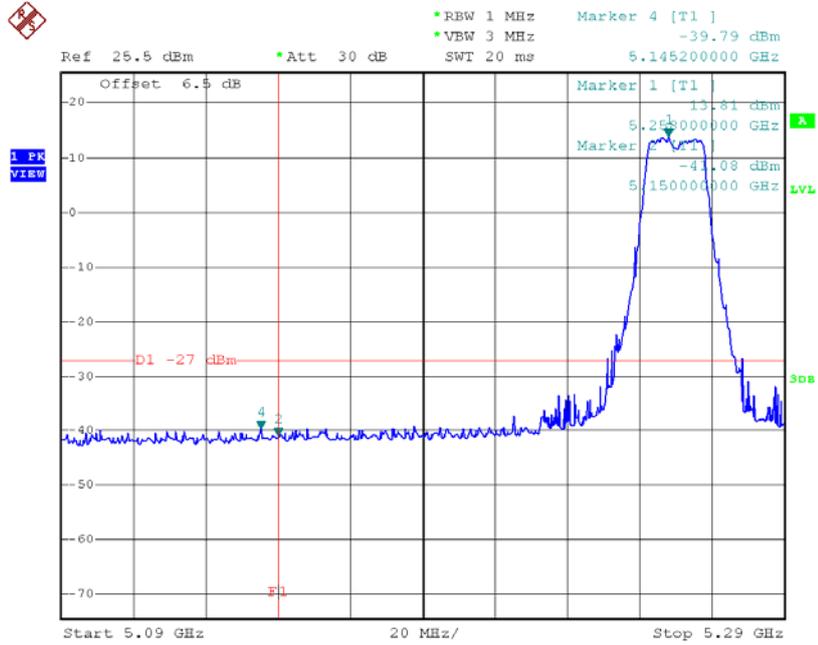

Date: 23.JUL.2015 20:32:20


TX mode CH64

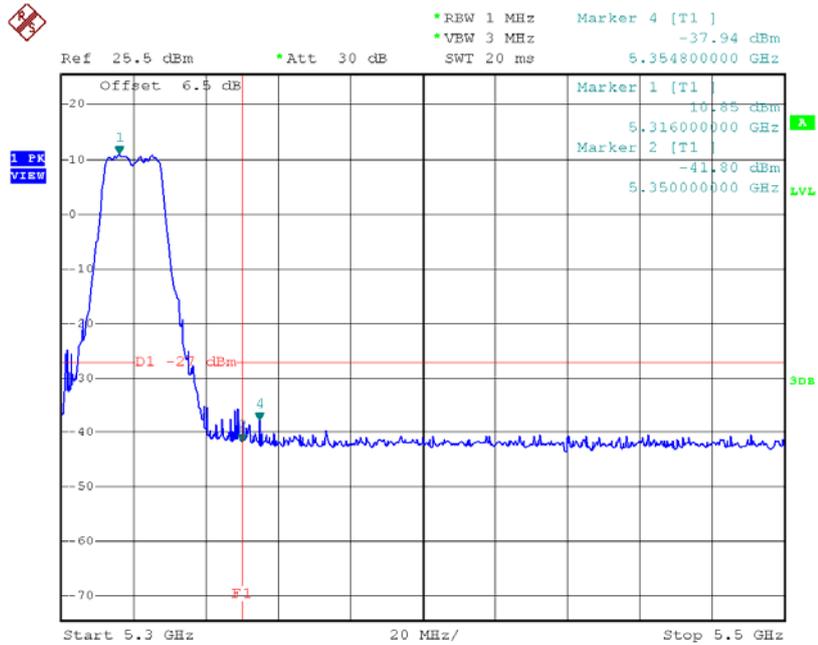

Date: 23.JUL.2015 20:35:52


Test Mode: UNII-2A/TX A Mode_ANT B

TX mode CH52

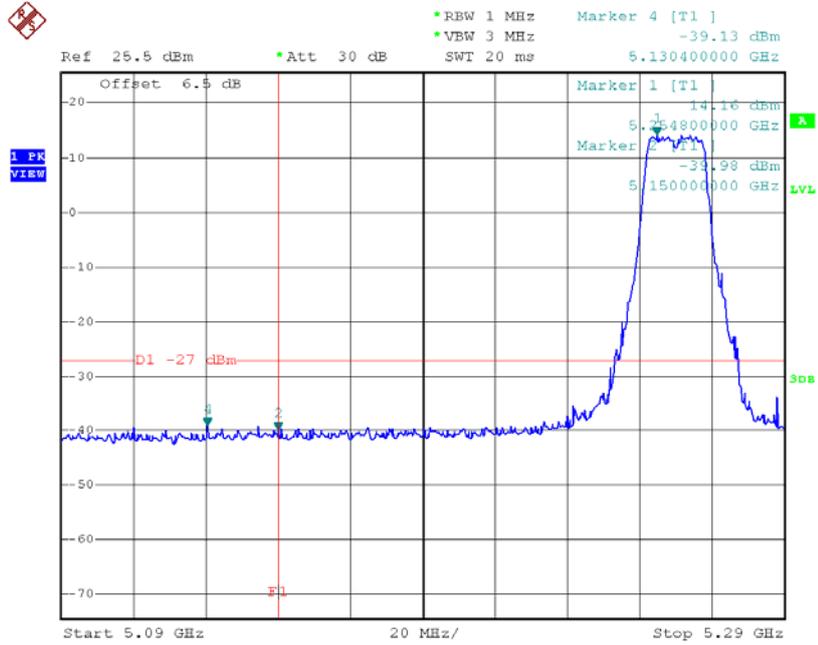

Date: 23.JUL.2015 20:58:43


TX mode CH64

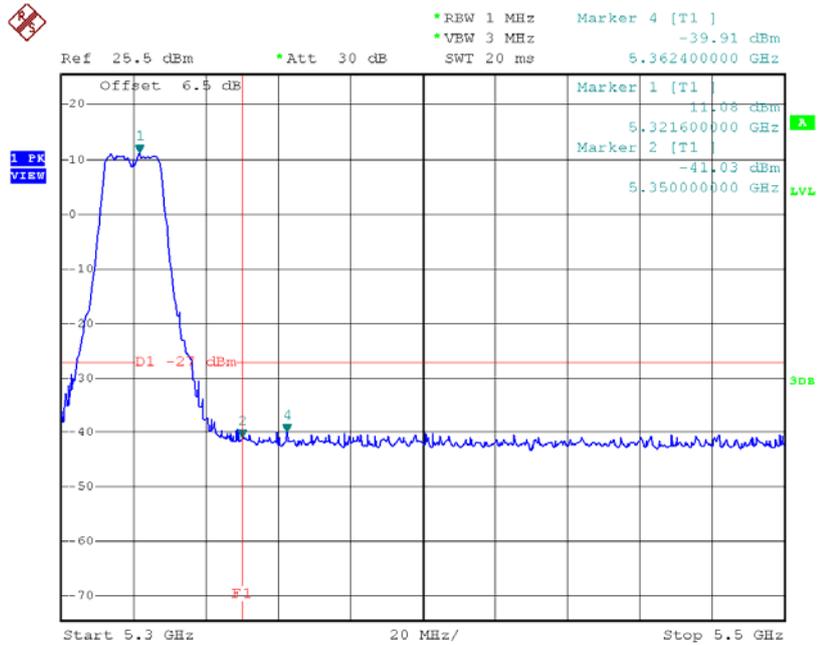

Date: 23.JUL.2015 21:01:51


Test Mode: UNII-2A/TX A Mode_ANT C

TX mode CH52

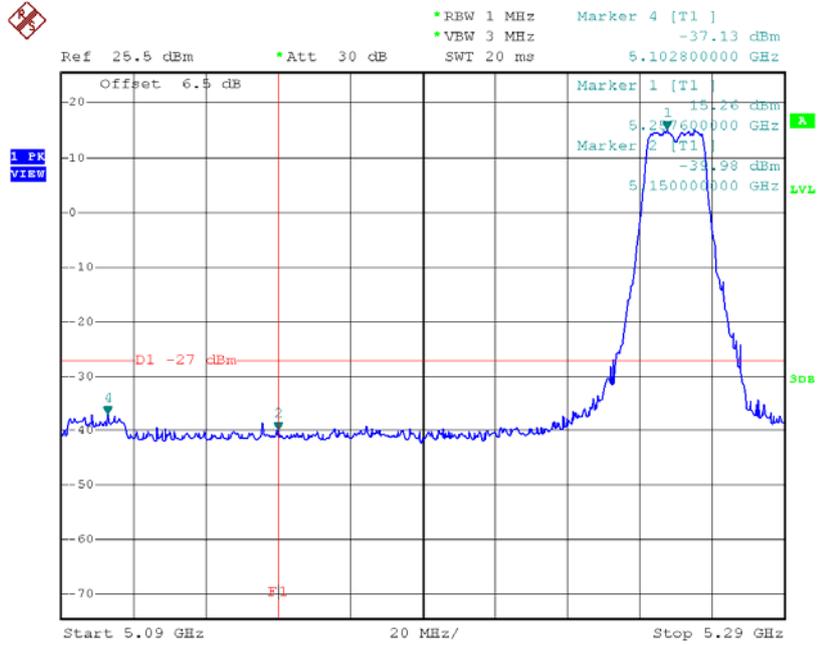

Date: 23.JUL.2015 21:20:58


TX mode CH64

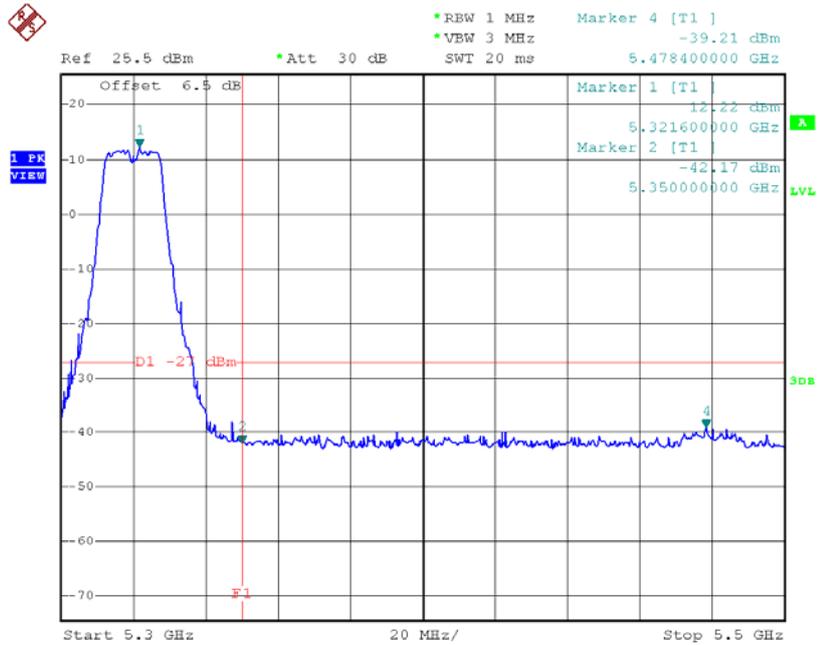

Date: 23.JUL.2015 21:23:45


Test Mode: UNII-2A/TX N20 Mode_ANT A

TX mode CH52

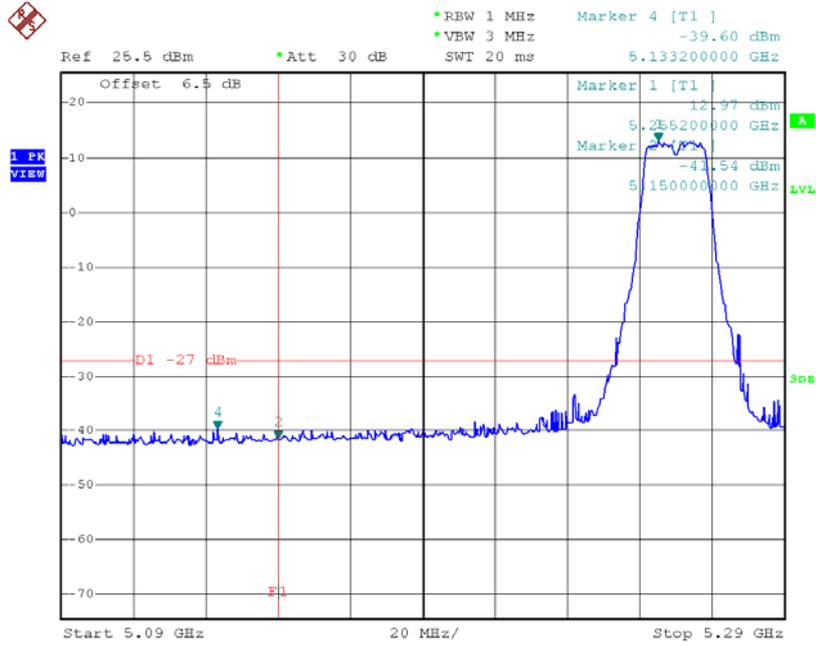

Date: 26.JUL.2015 11:15:09


TX mode CH64

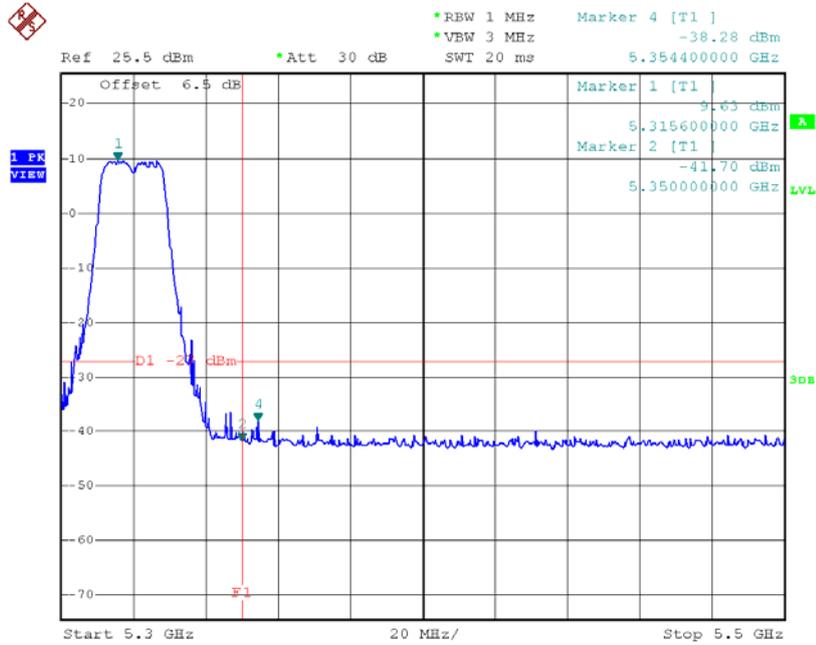

Date: 26.JUL.2015 11:17:21


Test Mode: UNII-2A/TX N20 Mode_ANT B

TX mode CH52

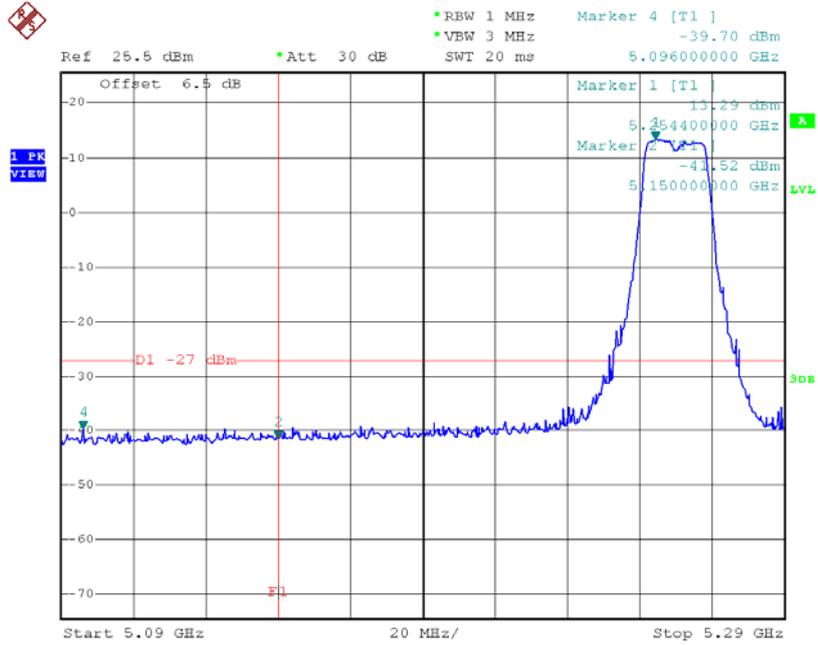

Date: 26.JUL.2015 11:31:04


TX mode CH64

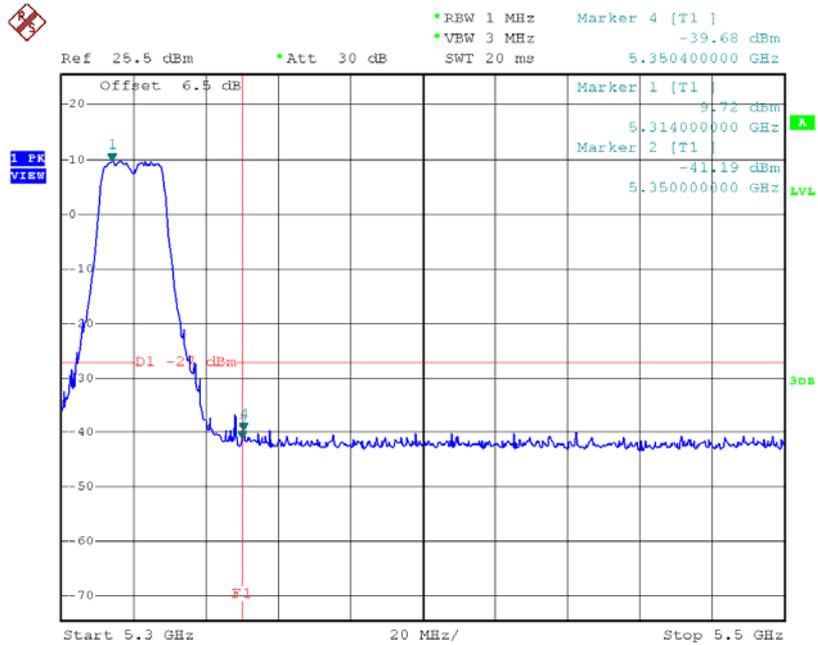

Date: 26.JUL.2015 11:33:06


Test Mode: UNII-2A/TX N20 Mode_ANT C

TX mode CH52

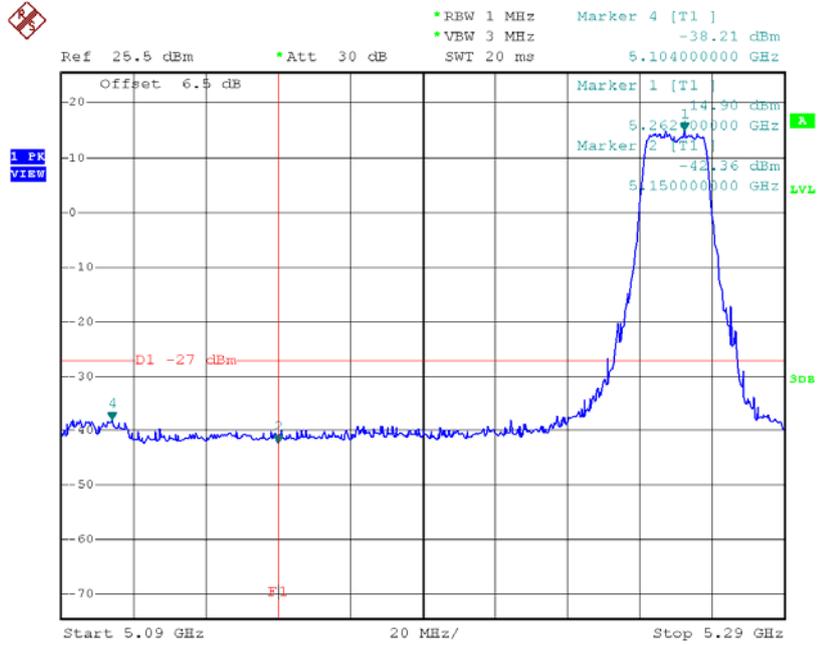

Date: 26.JUL.2015 11:44:28


TX mode CH64

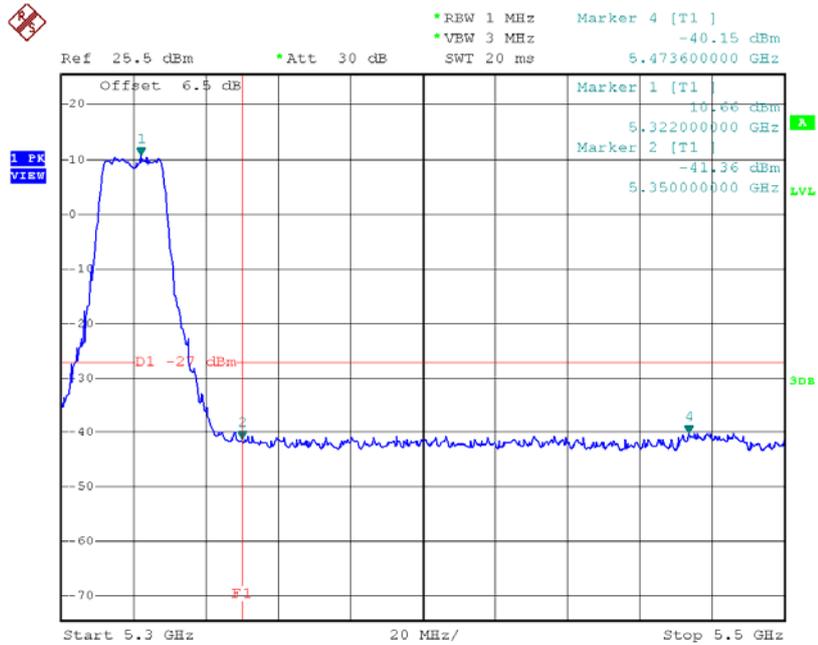

Date: 26.JUL.2015 11:46:29


Test Mode: UNII-2A/TX N40 Mode_ANT A

TX mode CH54

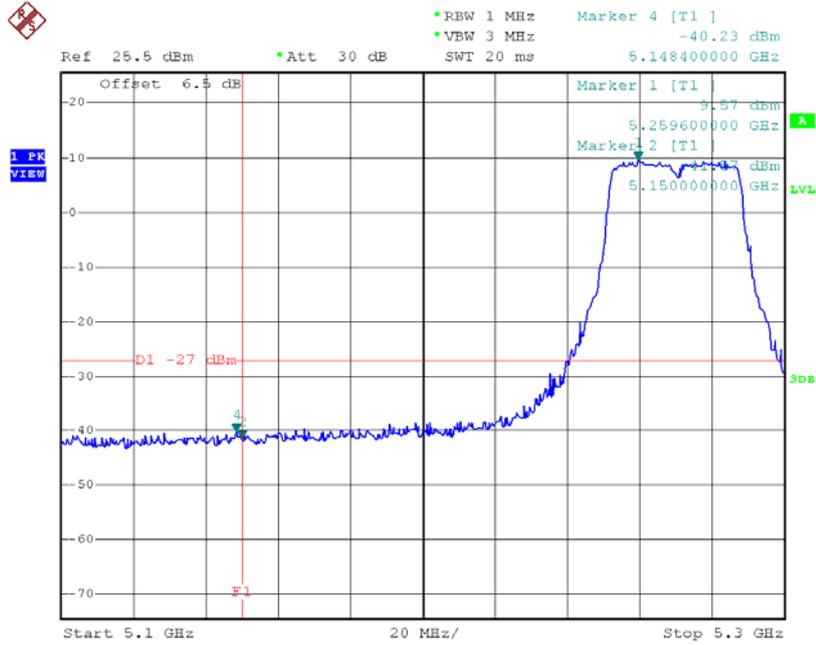

Date: 26.JUL.2015 13:42:40


TX mode CH62

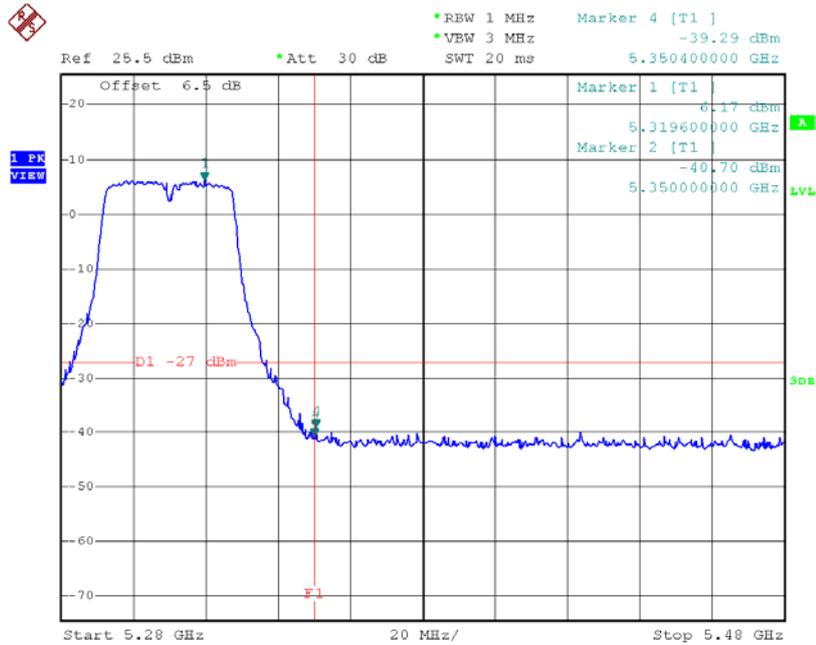

Date: 26.JUL.2015 13:43:59


Test Mode: UNII-2A/TX N40 Mode_ANT B

TX mode CH54

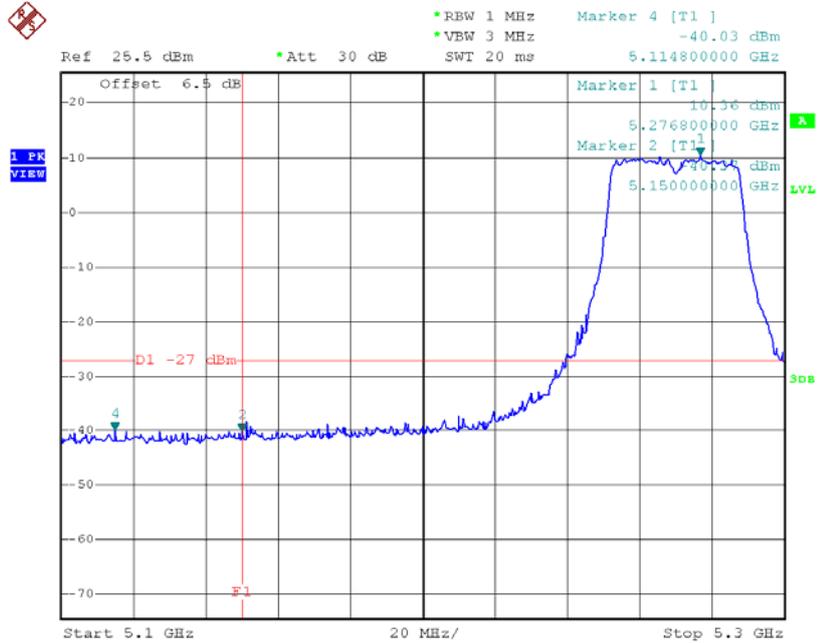

Date: 26.JUL.2015 13:53:09


TX mode CH62

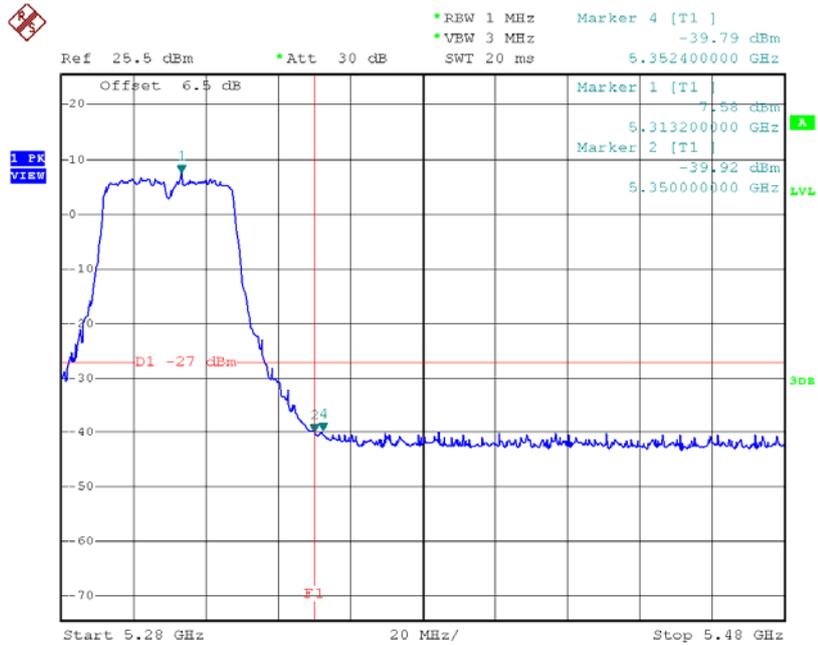

Date: 26.JUL.2015 13:54:15


Test Mode: UNII-2A/TX N40 Mode_ANT C

TX mode CH54

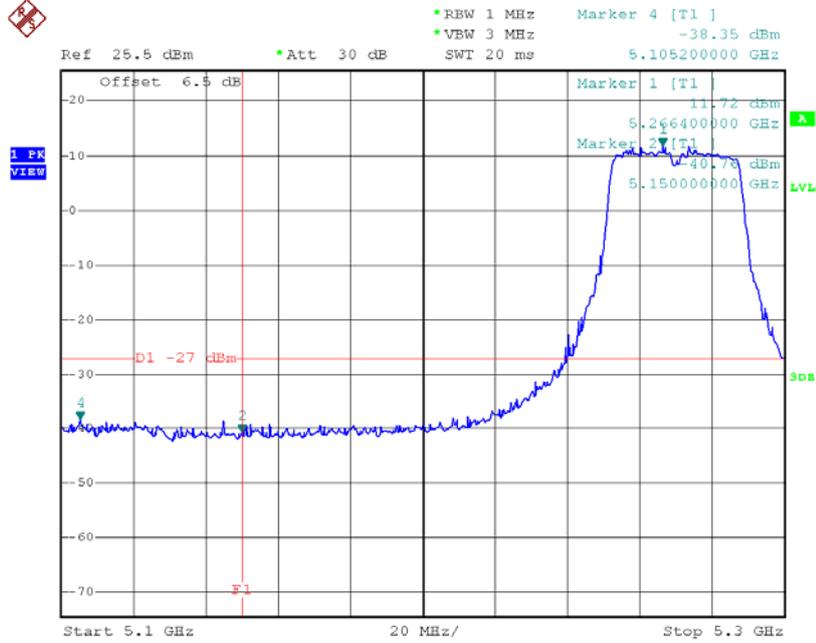

Date: 26.JUL.2015 14:02:55


TX mode CH62

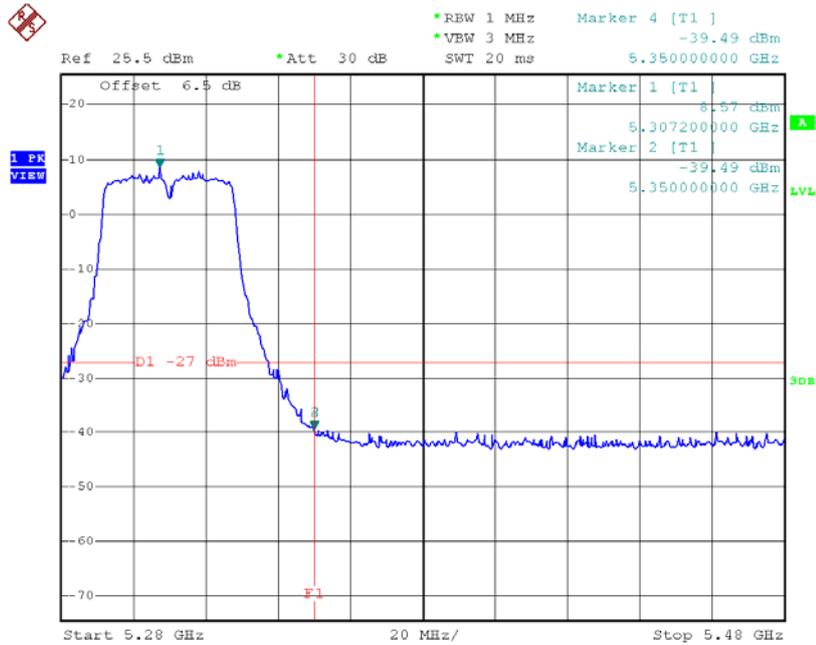

Date: 26.JUL.2015 14:03:53


Test Mode: UNII-2C/TX A Mode_ANT A

TX mode CH100

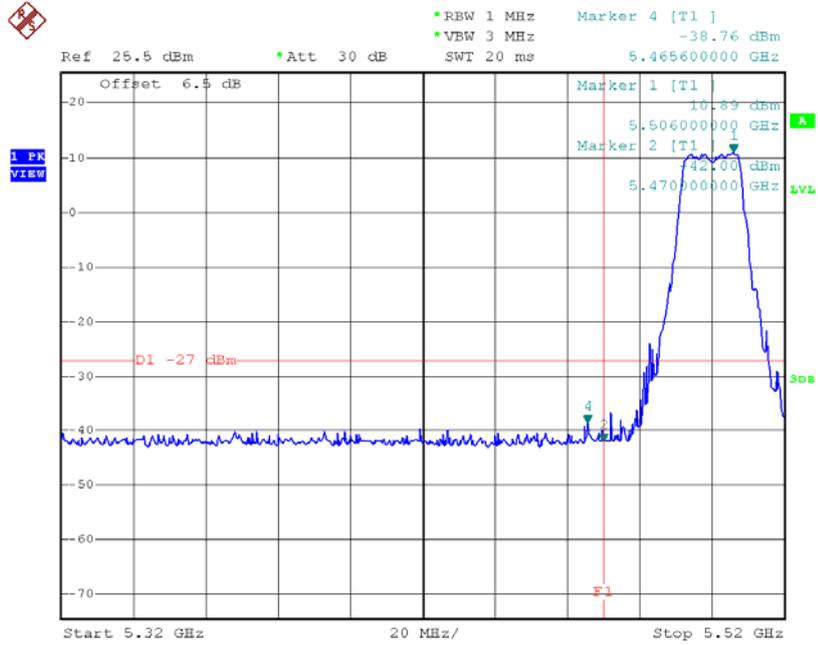

Date: 23.JUL.2015 20:40:41


TX mode CH140

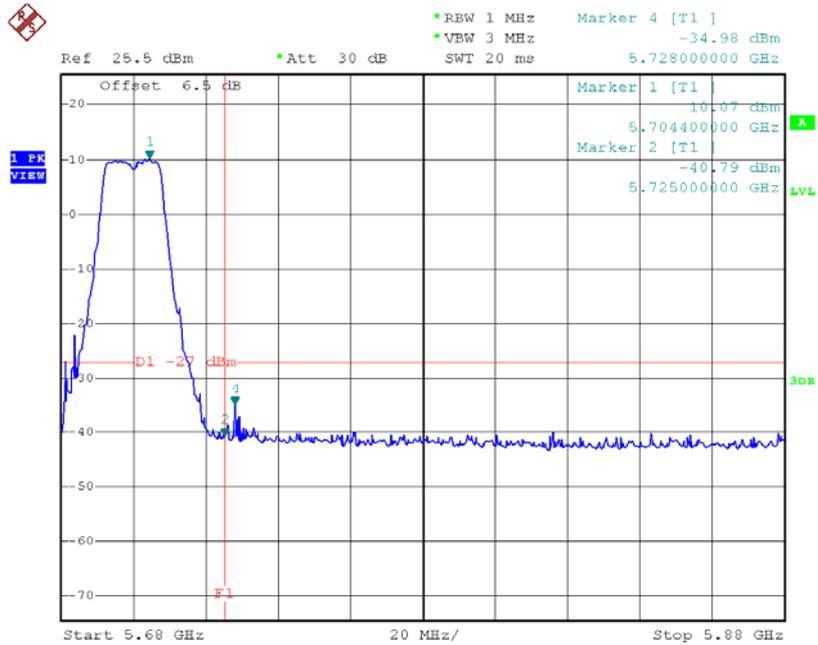

Date: 23.JUL.2015 20:44:30


Test Mode: UNII-2C/TX A Mode_ANT B

TX mode CH100

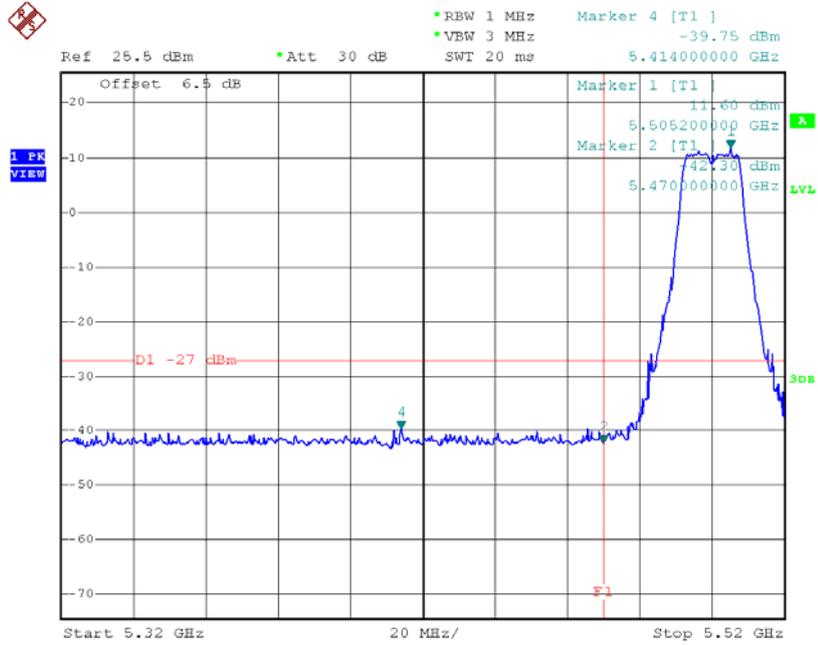

Date: 23.JUL.2015 21:03:51


TX mode CH140

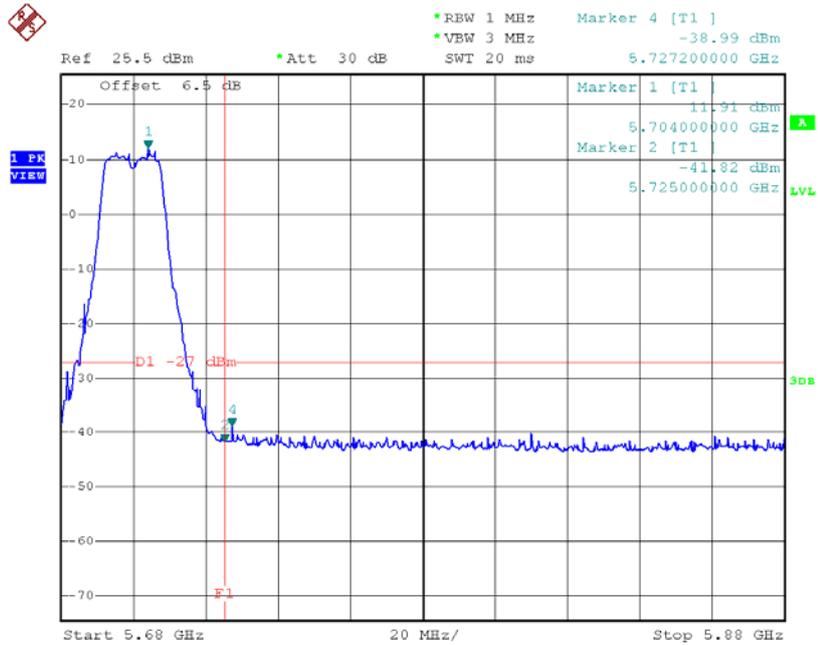

Date: 23.JUL.2015 21:08:11


Test Mode: UNII-2C/TX A Mode_ANT C

TX mode CH100

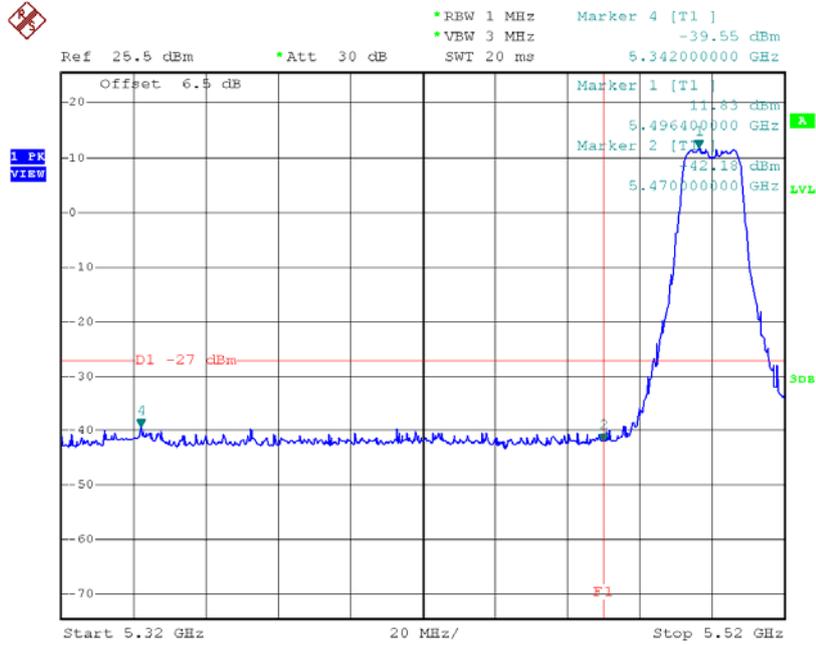

Date: 23.JUL.2015 21:25:15


TX mode CH140

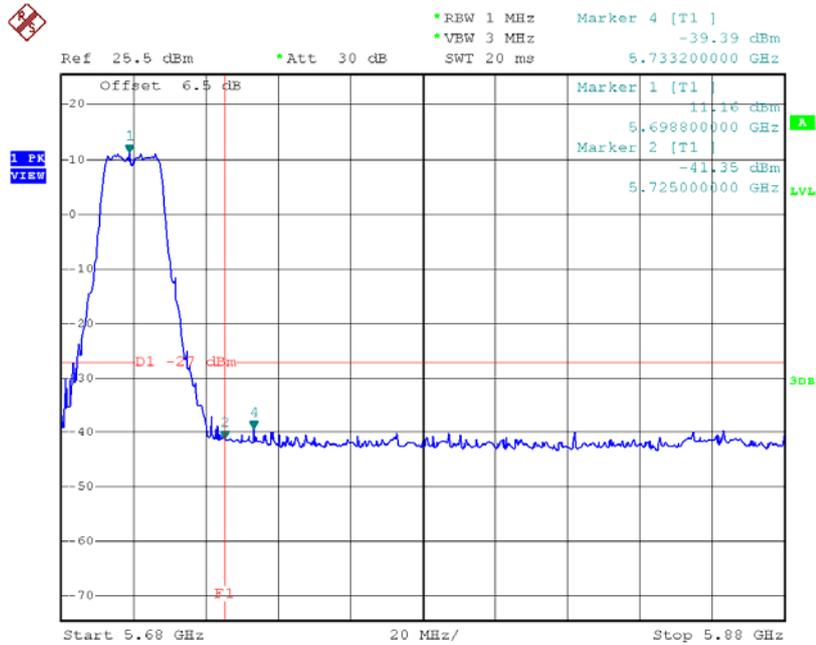

Date: 23.JUL.2015 21:28:00


Test Mode: UNII-2C/TX N20 Mode_ANT A

TX mode CH100

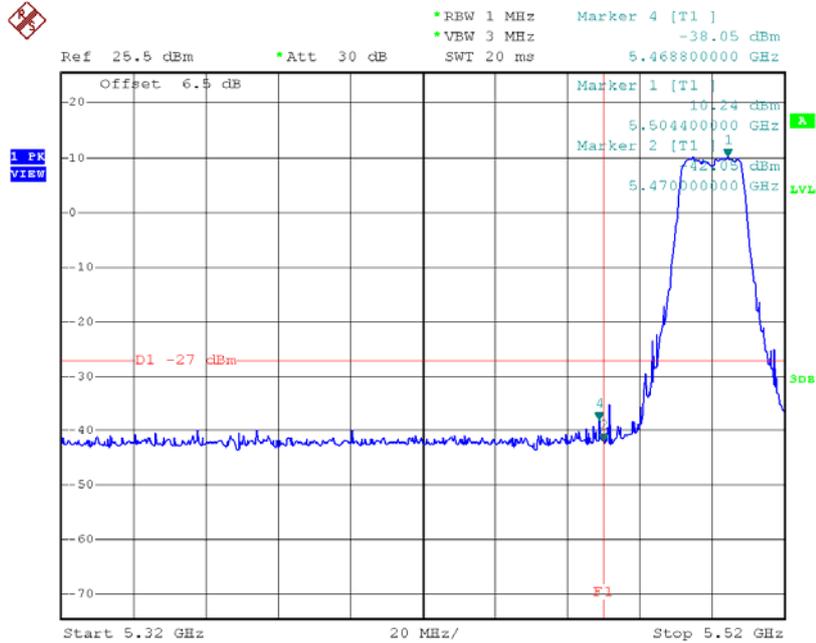

Date: 26.JUL.2015 11:18:30


TX mode CH140

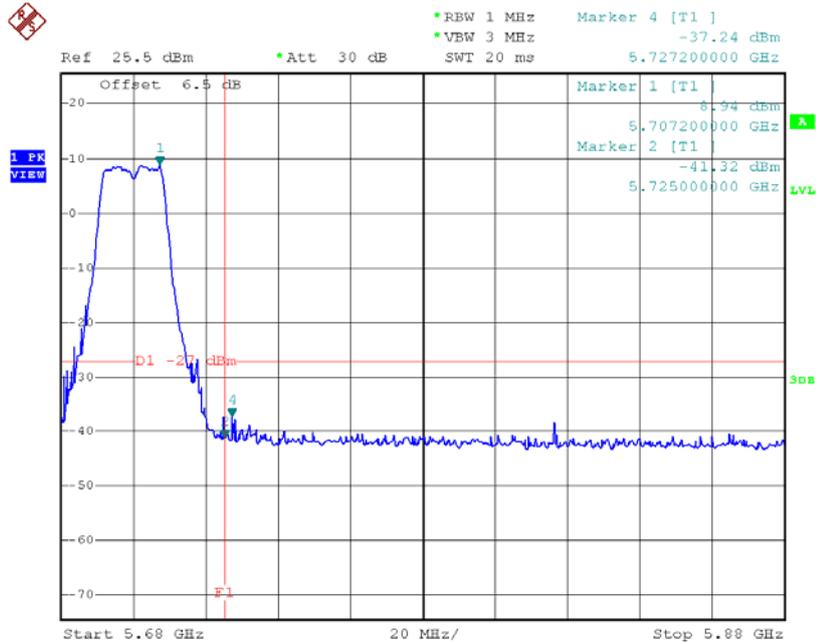

Date: 26.JUL.2015 11:22:00


Test Mode: UNII-2C/TX N20 Mode_ANT B

TX mode CH100

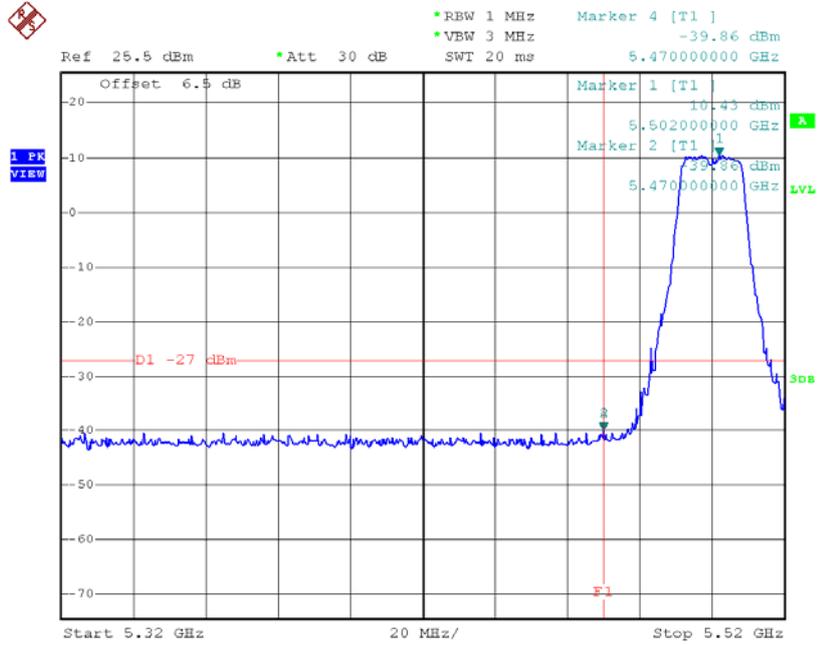

Date: 26.JUL.2015 11:34:13


TX mode CH140

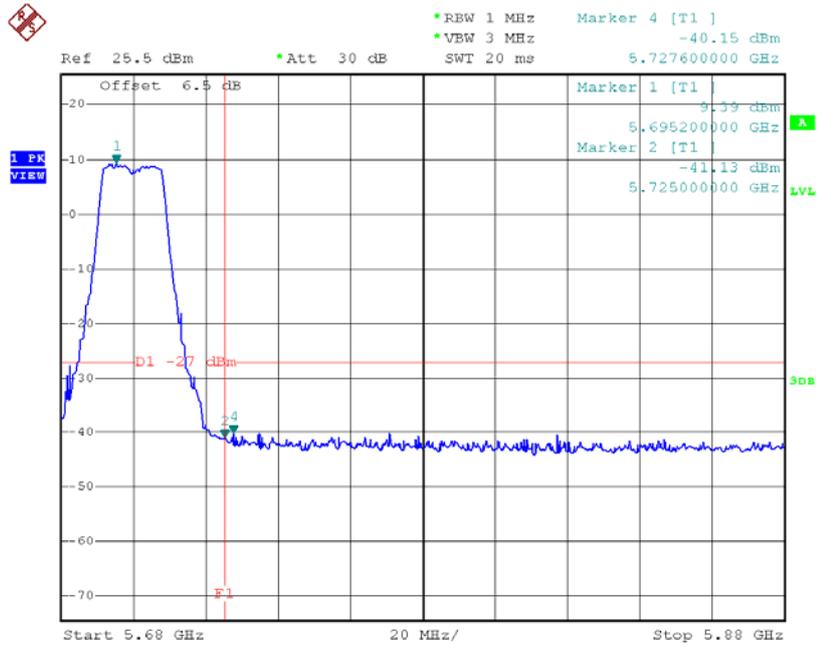

Date: 26.JUL.2015 11:36:35


Test Mode: UNII-2C/TX N20 Mode_ANT C

TX mode CH100

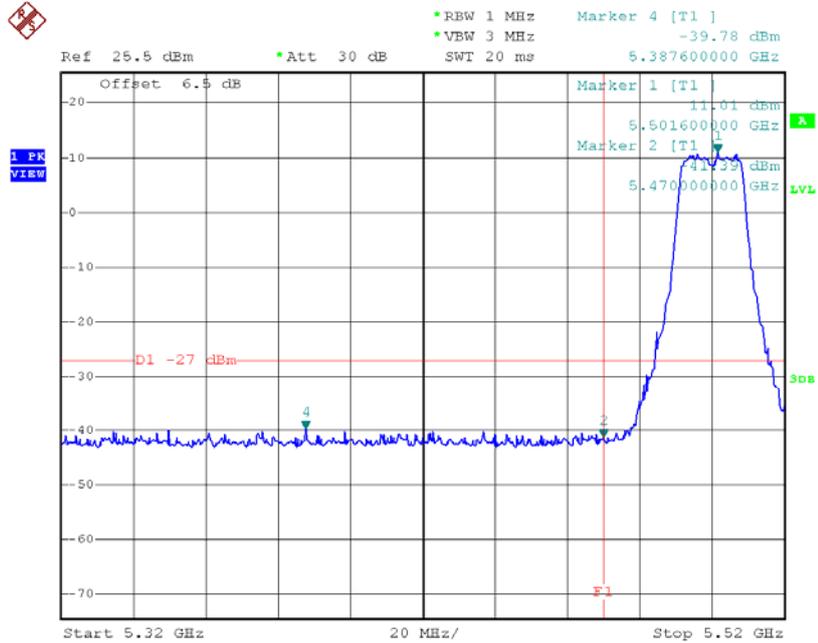

Date: 26.JUL.2015 11:47:34


TX mode CH140

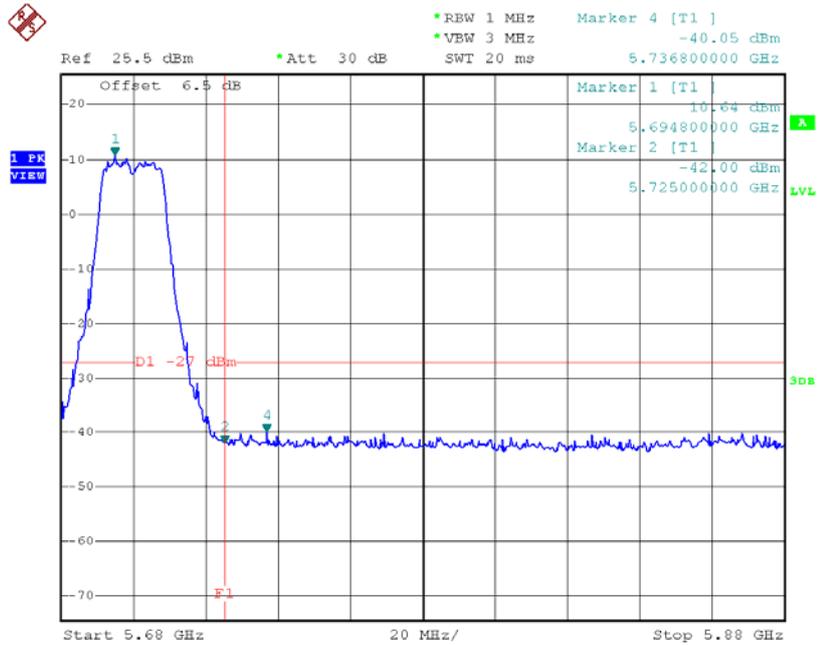

Date: 26.JUL.2015 11:49:29


Test Mode: UNII-2C/TX N40 Mode_ANT A

TX mode CH102

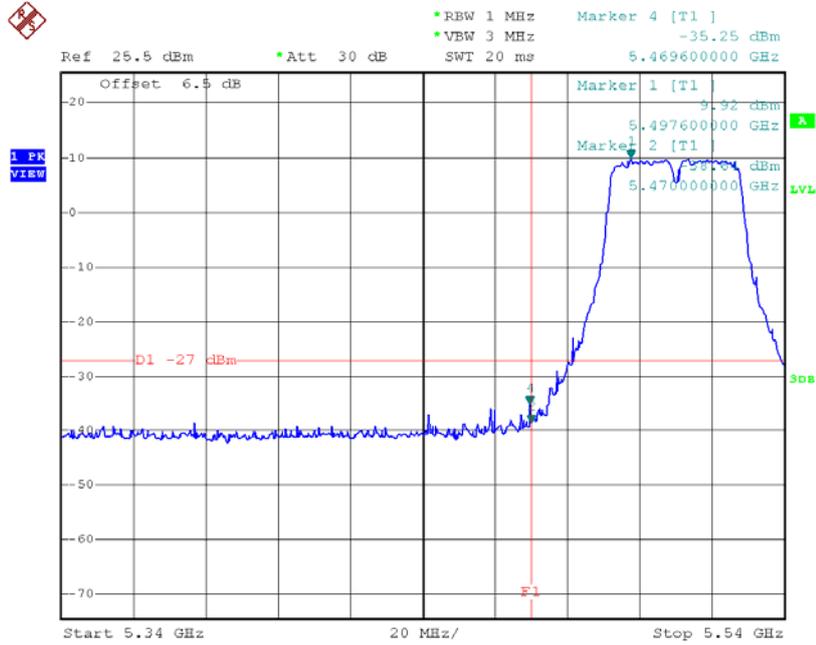

Date: 26.JUL.2015 13:45:06


TX mode CH134

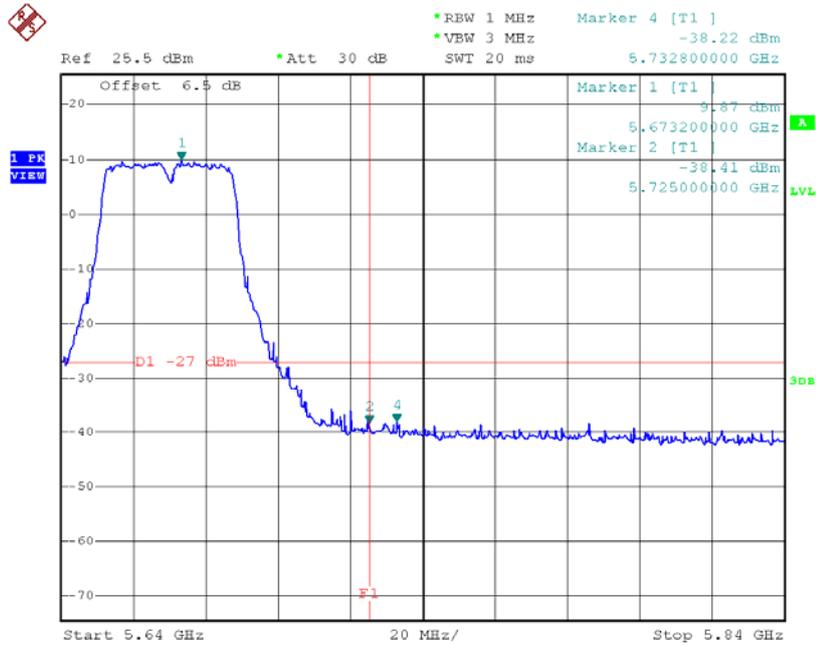

Date: 26.JUL.2015 13:46:53


Test Mode: UNII-2C/TX N40 Mode_ANT B

TX mode CH102

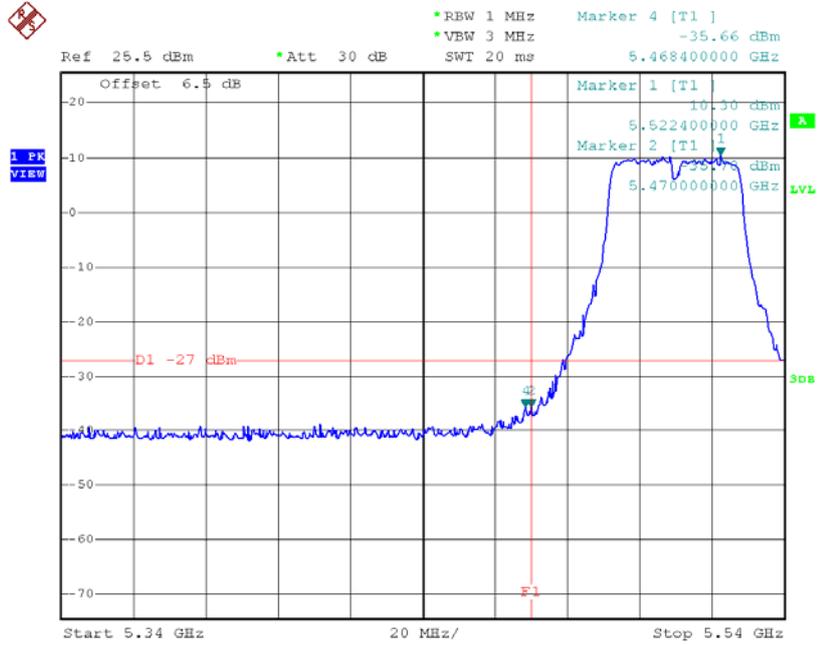

Date: 26.JUL.2015 13:55:17


TX mode CH134

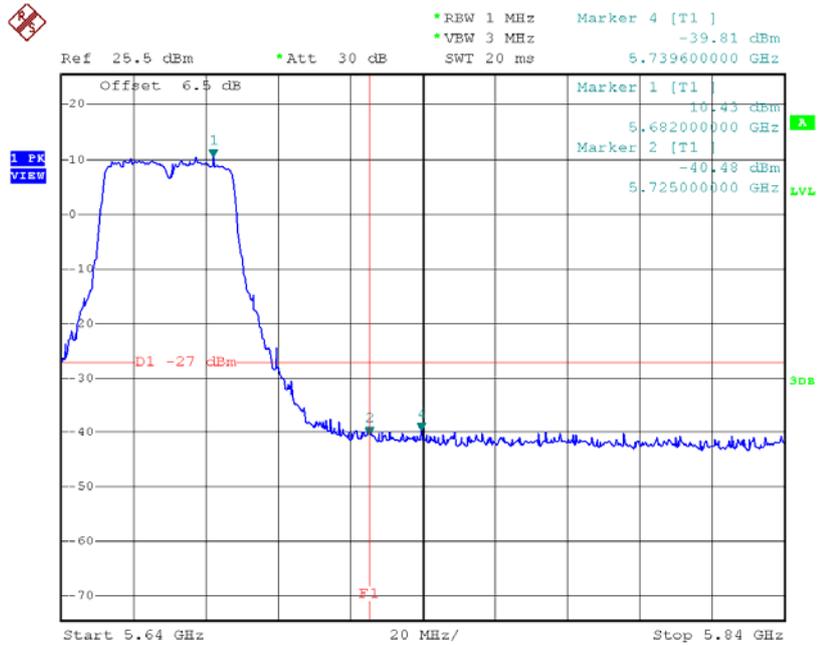

Date: 26.JUL.2015 13:57:27


Test Mode: UNII-2C/TX N40 Mode_ANT C

TX mode CH102

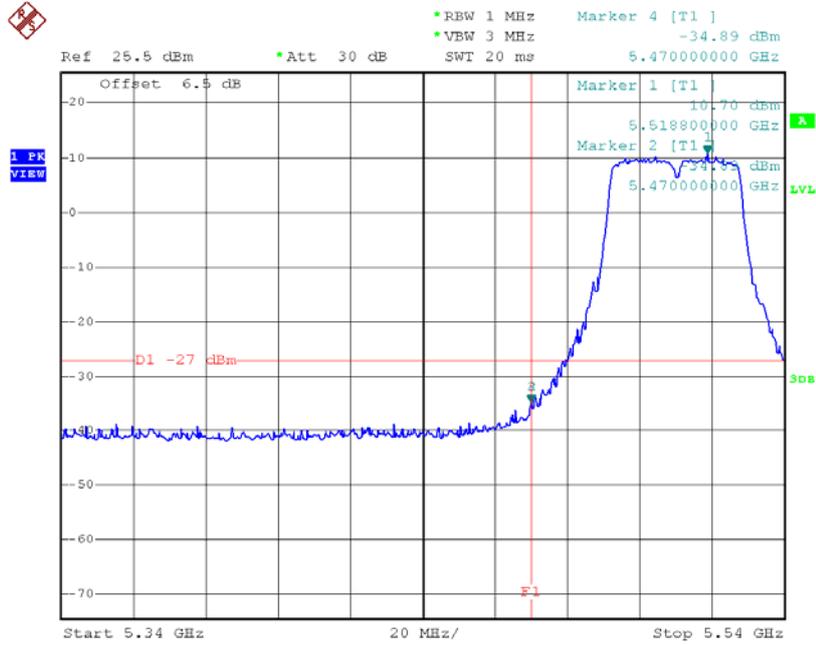

Date: 26.JUL.2015 14:04:50


TX mode CH134

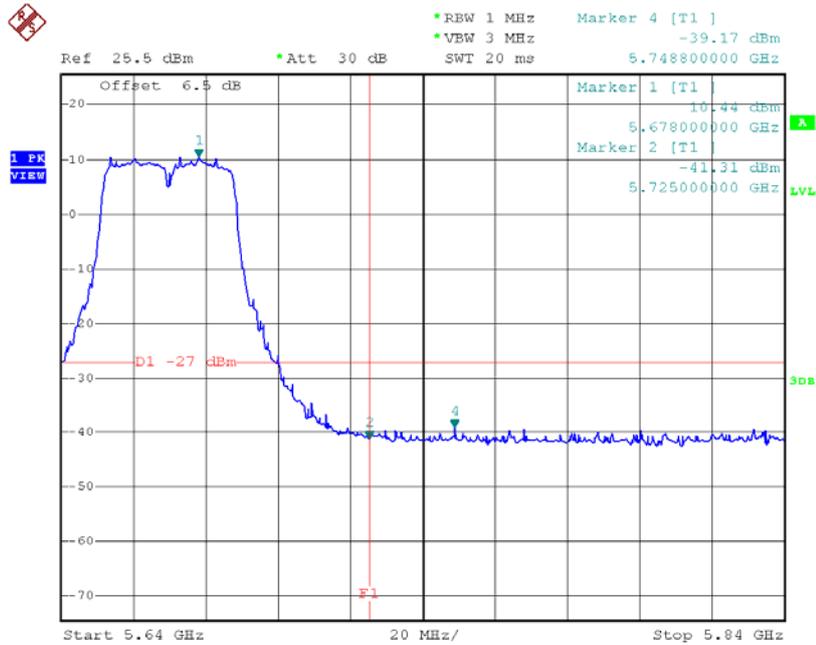

Date: 26.JUL.2015 14:06:42


Test Mode: UNII-3/TX A Mode_ANT A

TX A Mode CH149

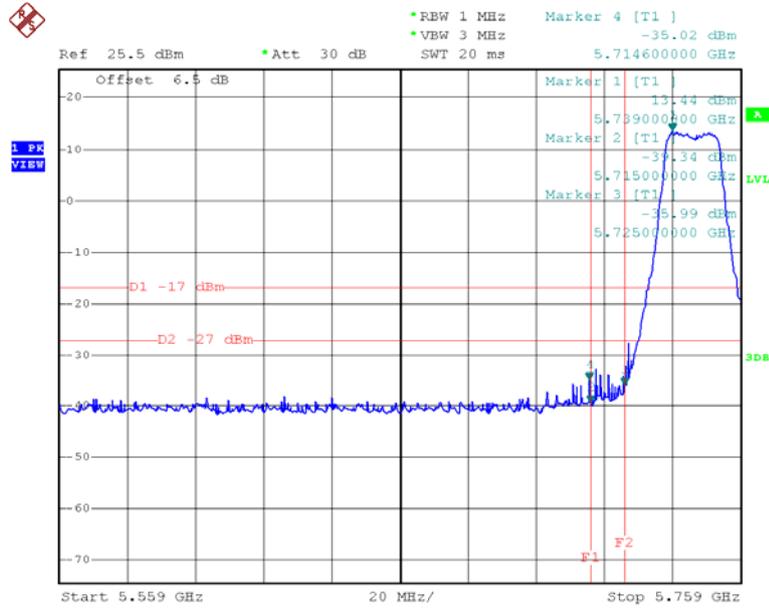

Date: 23.JUL.2015 20:46:22


TX A Mode CH165

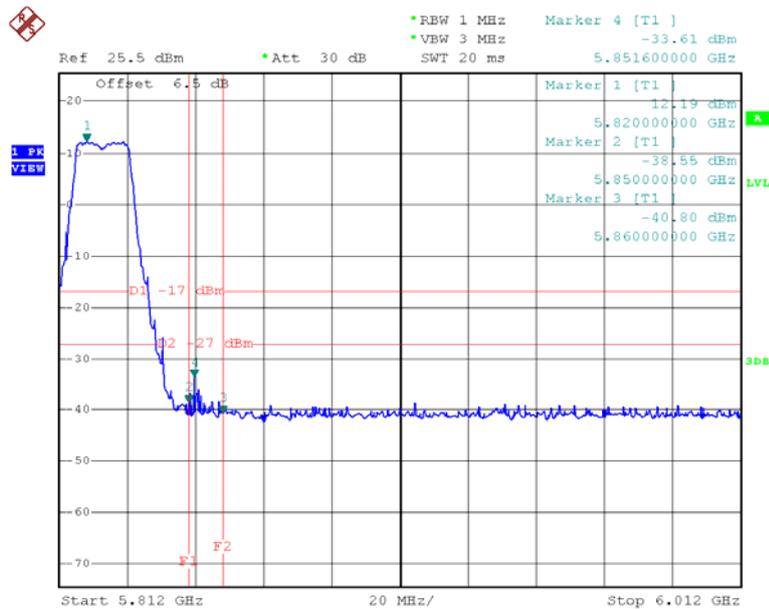

Date: 23.JUL.2015 20:49:40


Test Mode: UNII-3/TX A Mode_ANT B

TX A Mode CH149

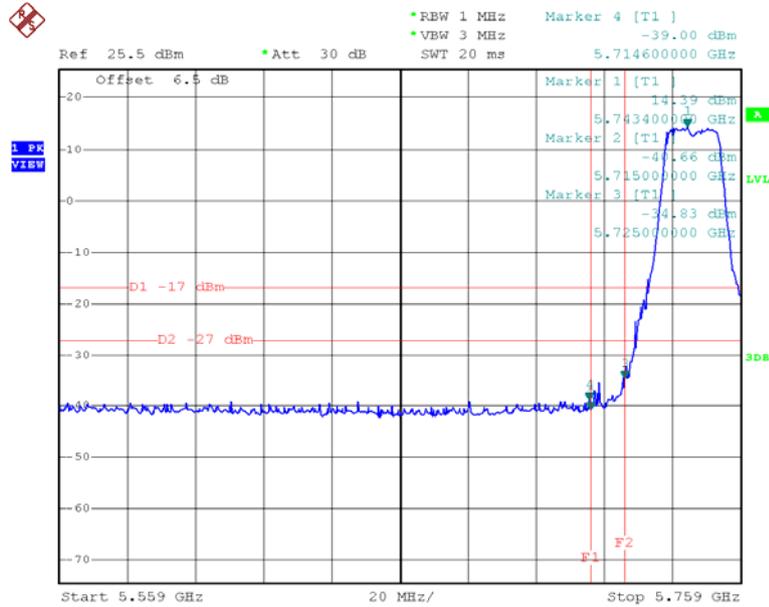

Date: 23.JUL.2015 21:10:24


TX A Mode CH165

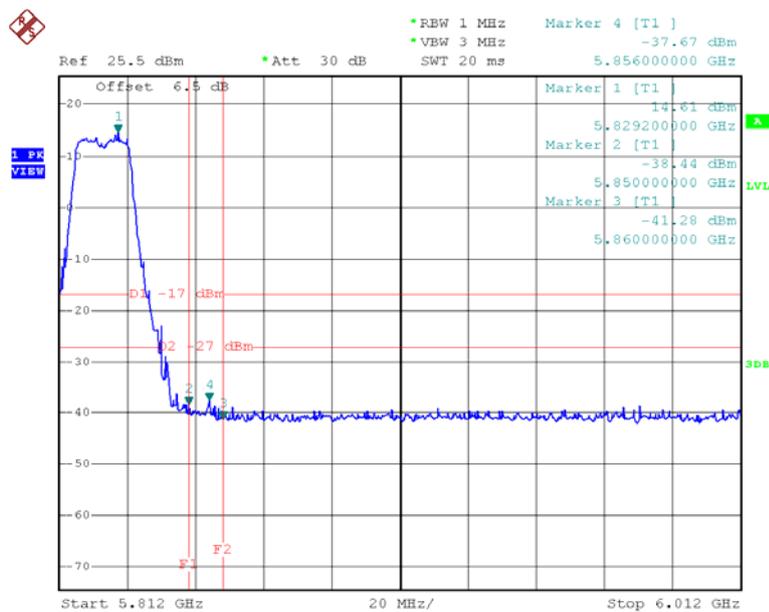

Date: 23.JUL.2015 21:13:53


Test Mode: UNII-3/TX A Mode_ANT C

TX A Mode CH149

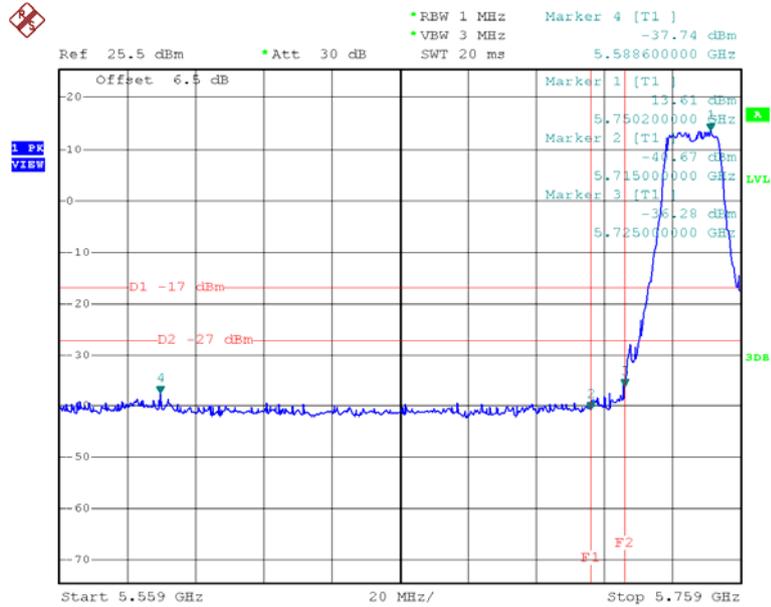

Date: 23.JUL.2015 21:29:42


TX A Mode CH165

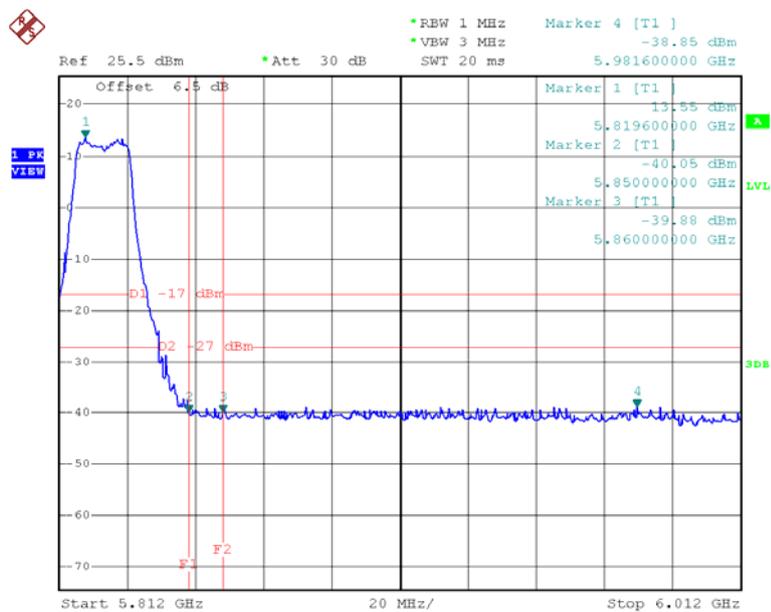

Date: 23.JUL.2015 21:32:42


Test Mode: UNII-3/TX N20 Mode_ANT A

TX HT20 mode CH149

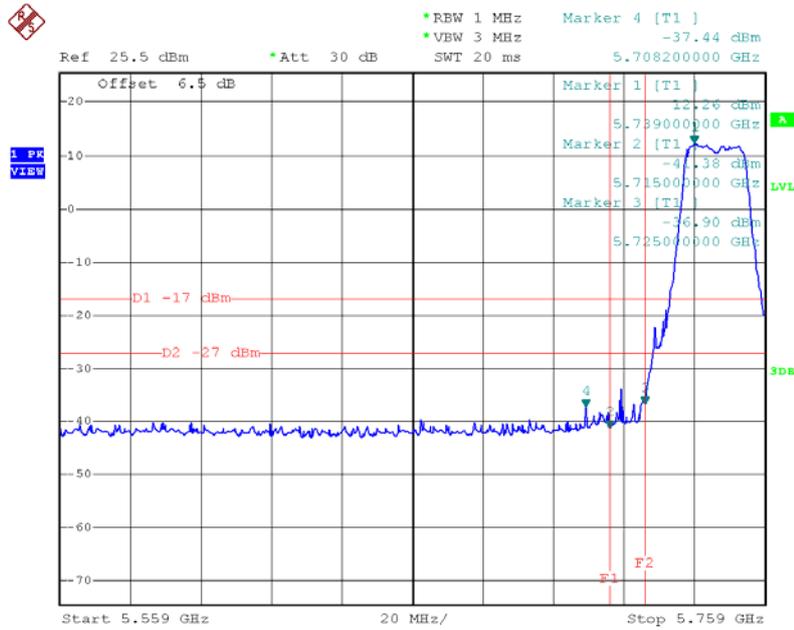

Date: 26.JUL.2015 11:23:12


TX HT20 mode CH165

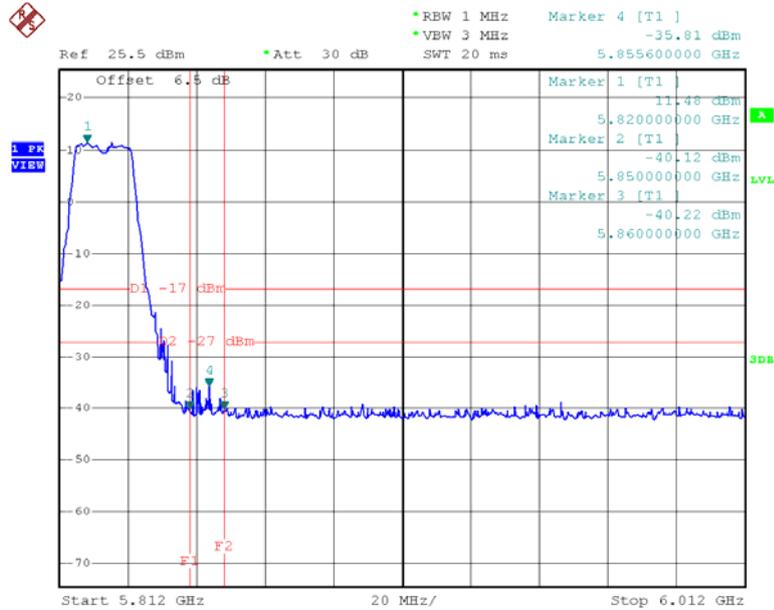

Date: 26.JUL.2015 11:25:35


Test Mode: UNII-3/TX N20 Mode_ANT B

TX HT20 mode CH149

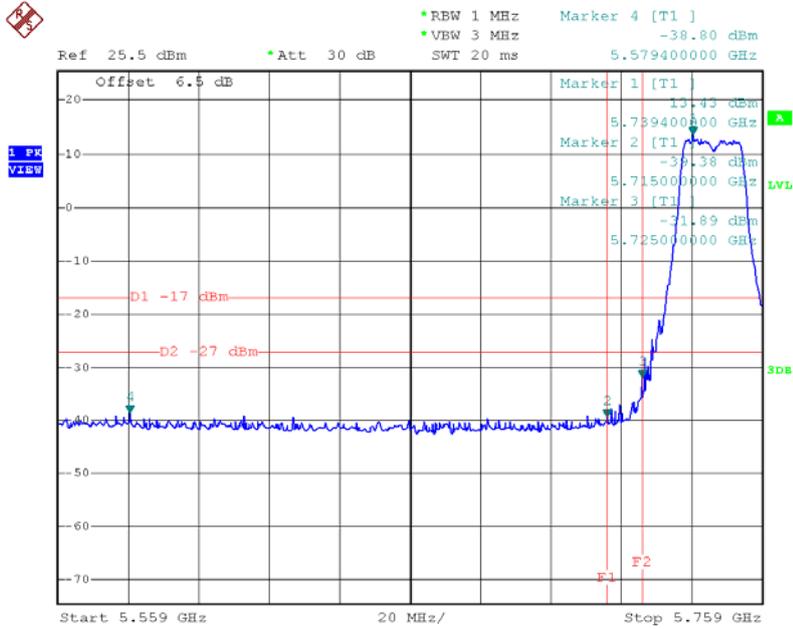

Date: 26.JUL.2015 11:37:47


X HT20 mode CH165

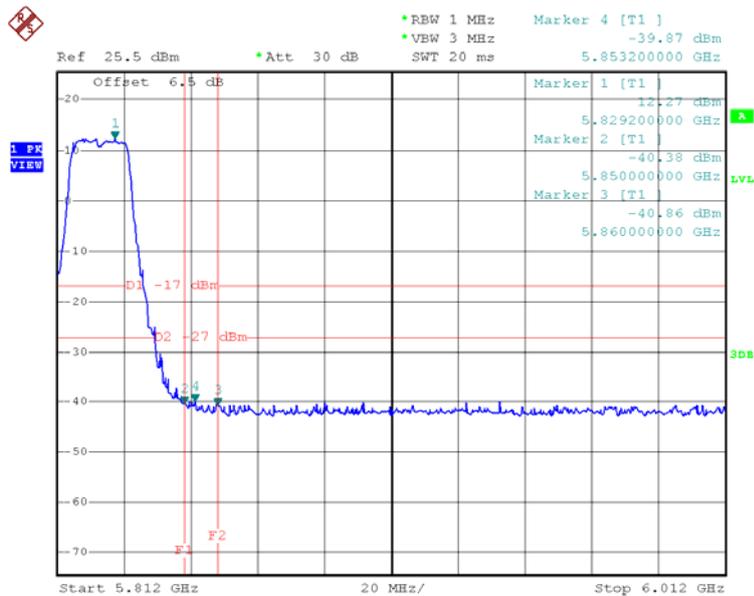

Date: 26.JUL.2015 11:39:54


Test Mode: UNII-3/TX N20 Mode_ANT C

TX HT20 mode CH149

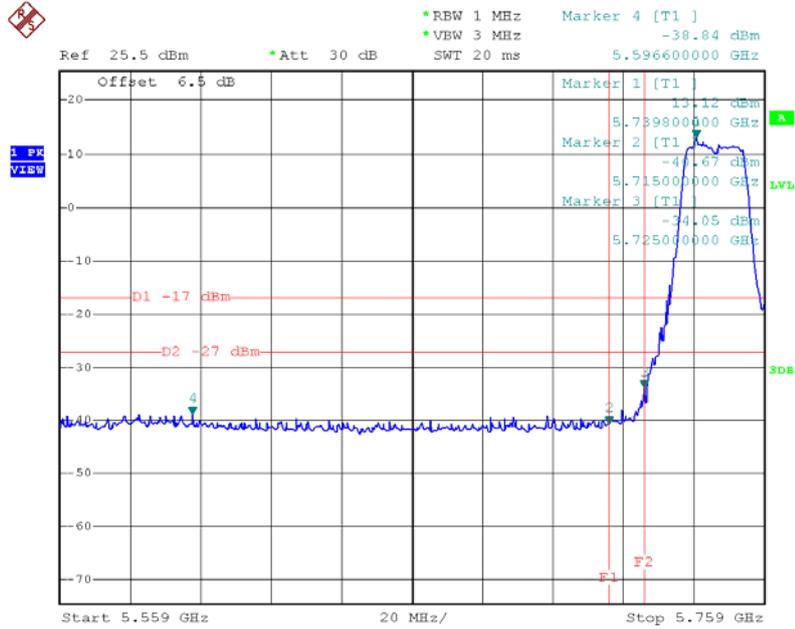

Date: 26.JUL.2015 11:50:33


X HT20 mode CH165

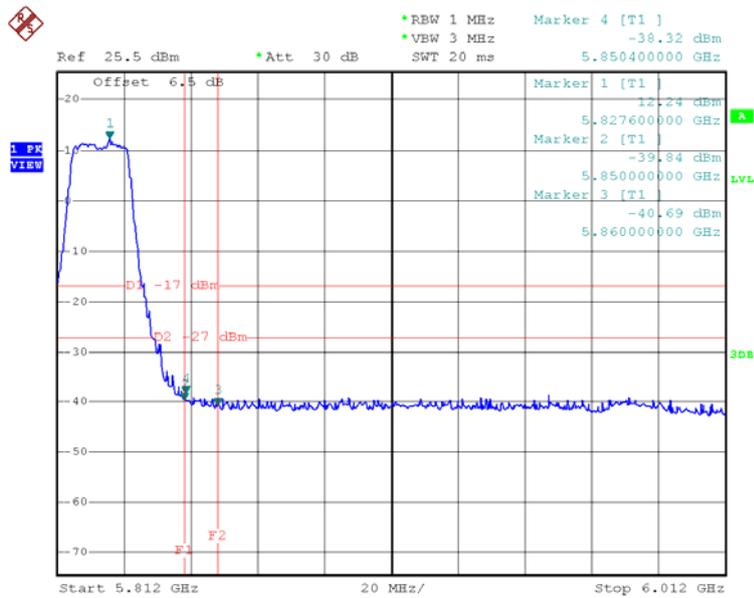

Date: 26.JUL.2015 11:52:35


Test Mode: UNII-3/TX N40 Mode_ANT A

UNII-3/TX HT40 mode CH151

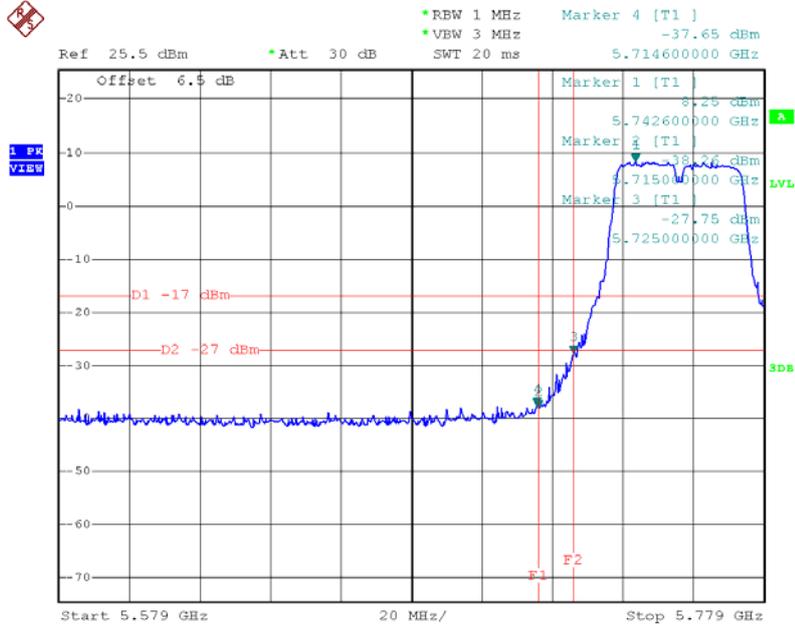

Date: 26.JUL.2015 13:47:59


UNII-3/TX HT40 mode CH159

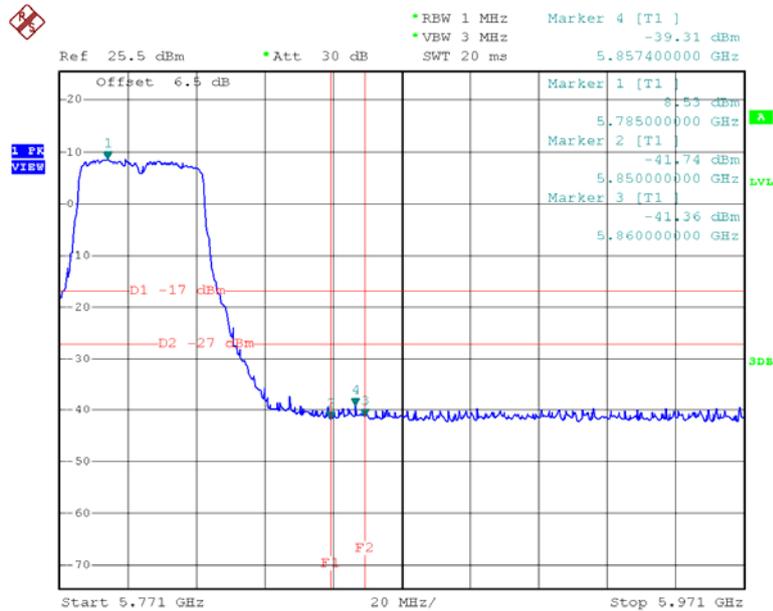

Date: 26.JUL.2015 13:48:54


Test Mode: UNII-3/TX N40 Mode_ANT B

TX HT40 mode CH151

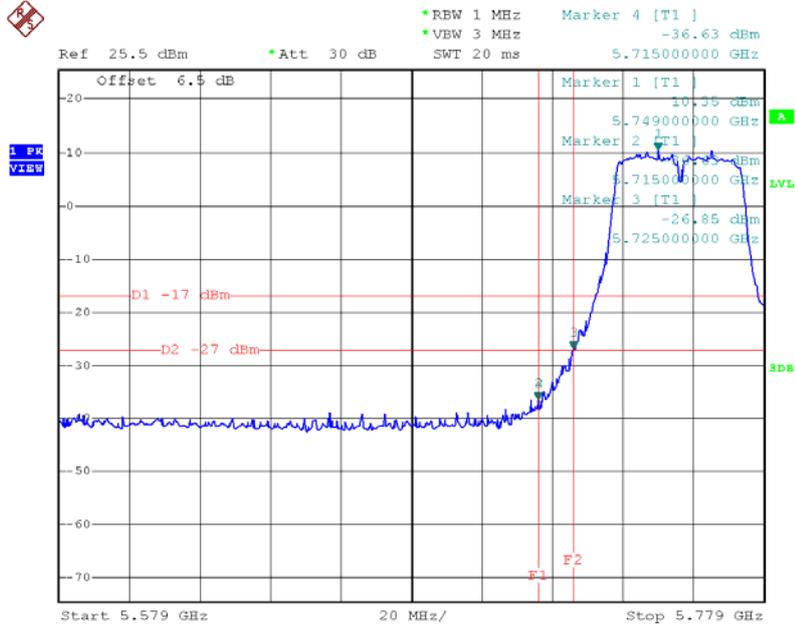

Date: 26.JUL.2015 13:58:30


HT40 mode CH159

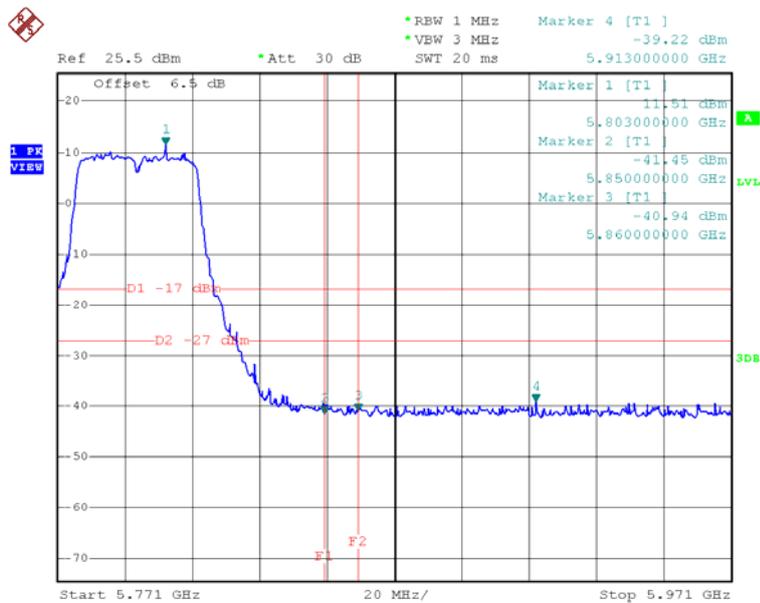

Date: 26.JUL.2015 13:59:24


Test Mode: UNII-3/TX N40 Mode_ANT C

TX HT40 mode CH151

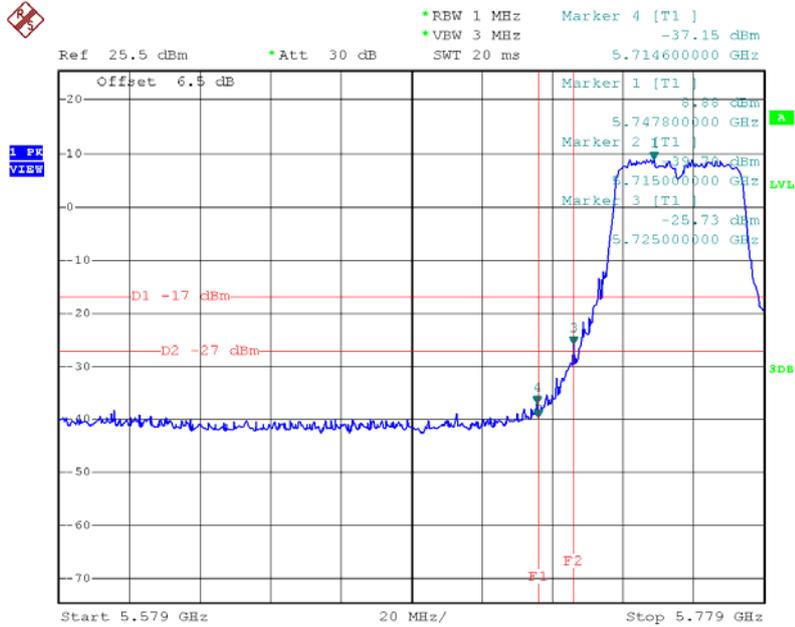


Date: 26.JUL.2015 14:07:55

HT40 mode CH159

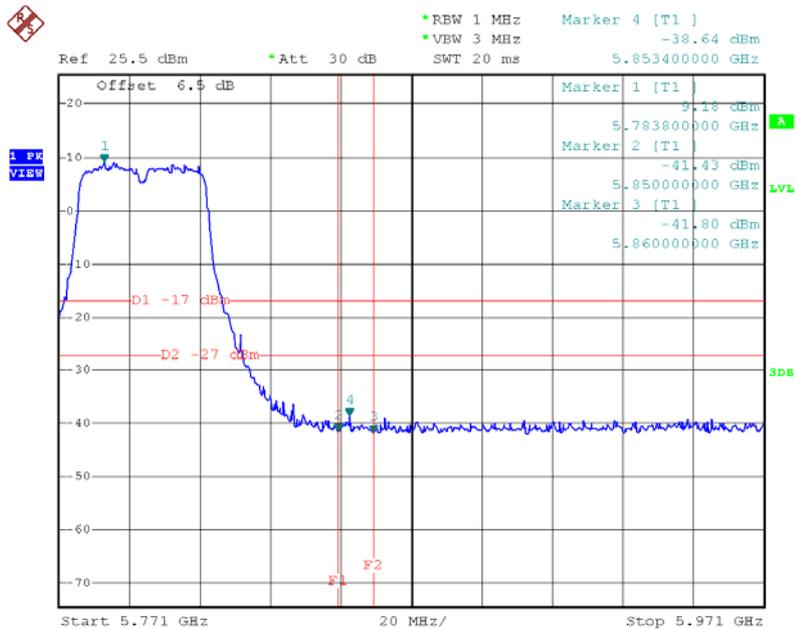


Test Mode: UNII-1/TX AC20 Mode_ANT A

TX mode CH36

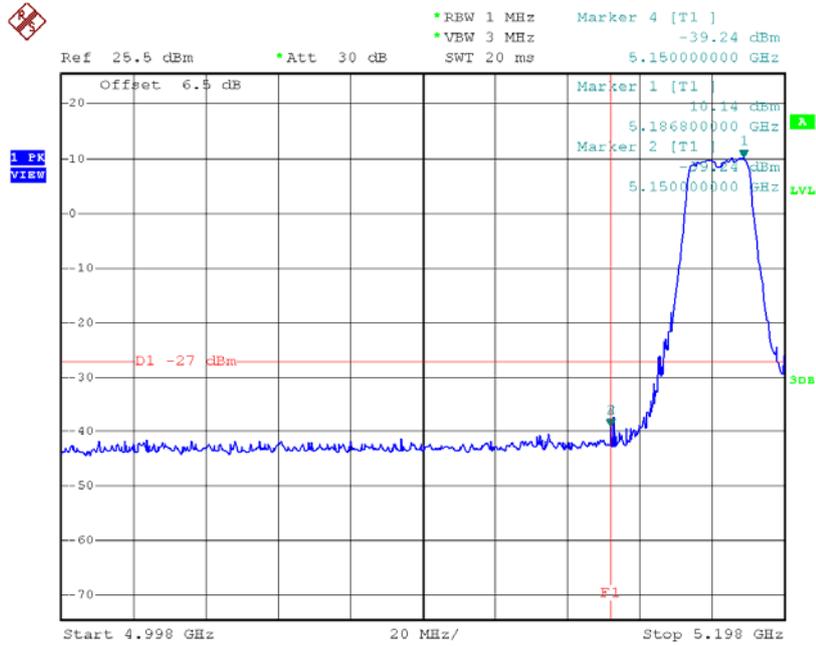

Date: 26.JUL.2015 13:27:45


TX mode CH48

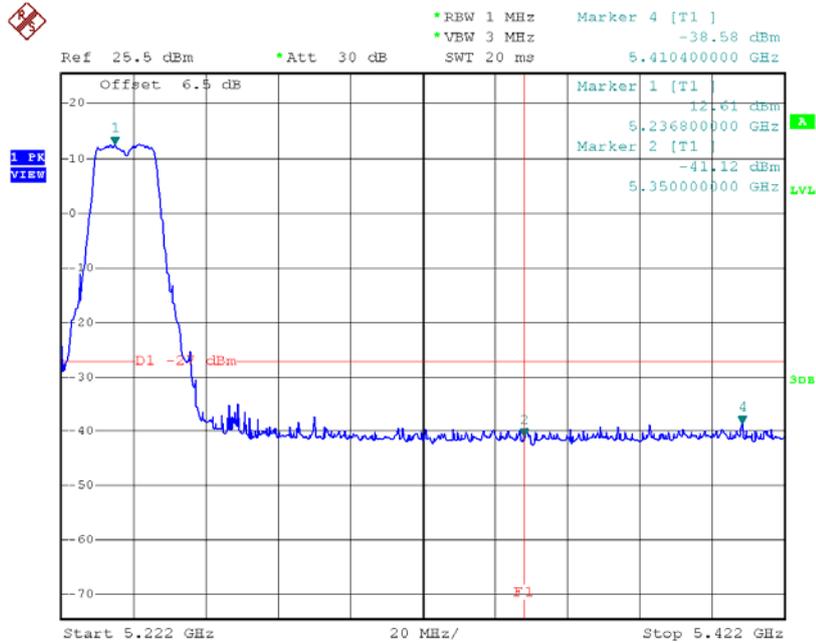

Date: 26.JUL.2015 13:29:29


Test Mode: UNII-1/TX AC20 Mode_ANT B

TX mode CH36

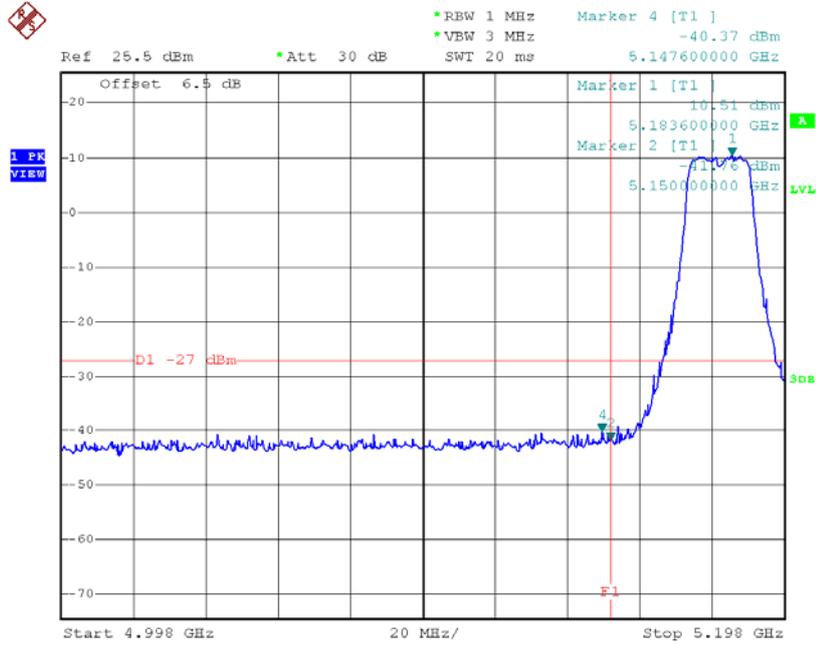

Date: 26.JUL.2015 12:08:18


TX mode CH48

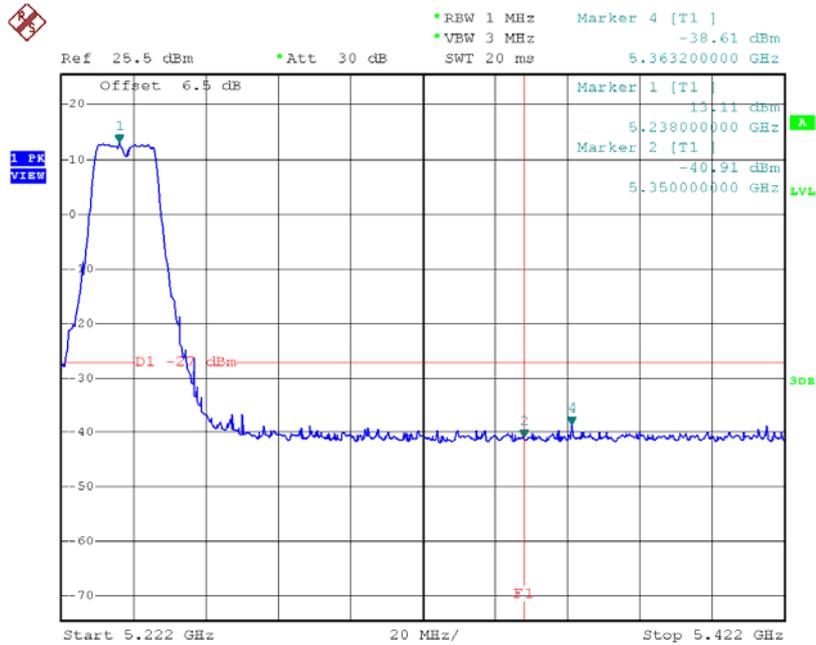

Date: 26.JUL.2015 13:17:26


Test Mode: UNII-1/TX AC20 Mode_ANT C

TX mode CH36

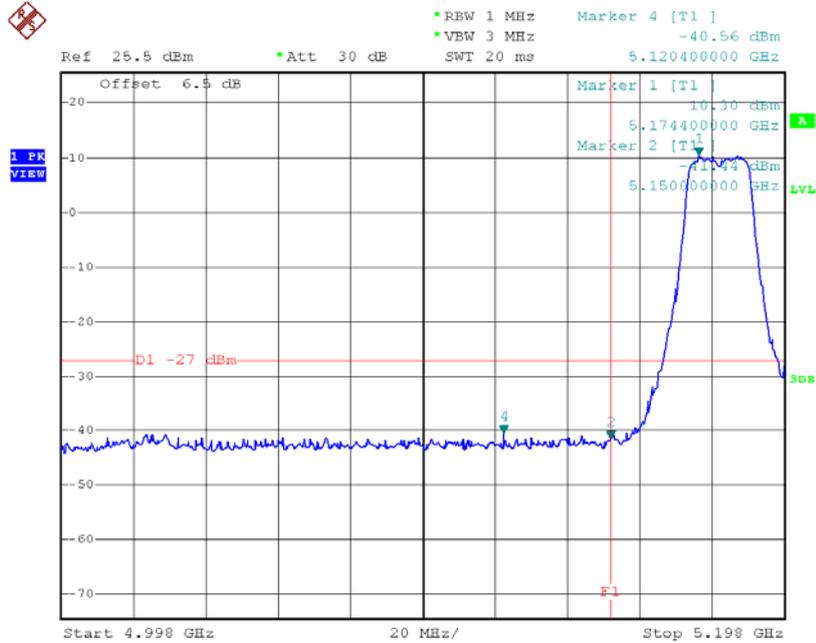

Date: 26.JUL.2015 11:55:28


TX mode CH48

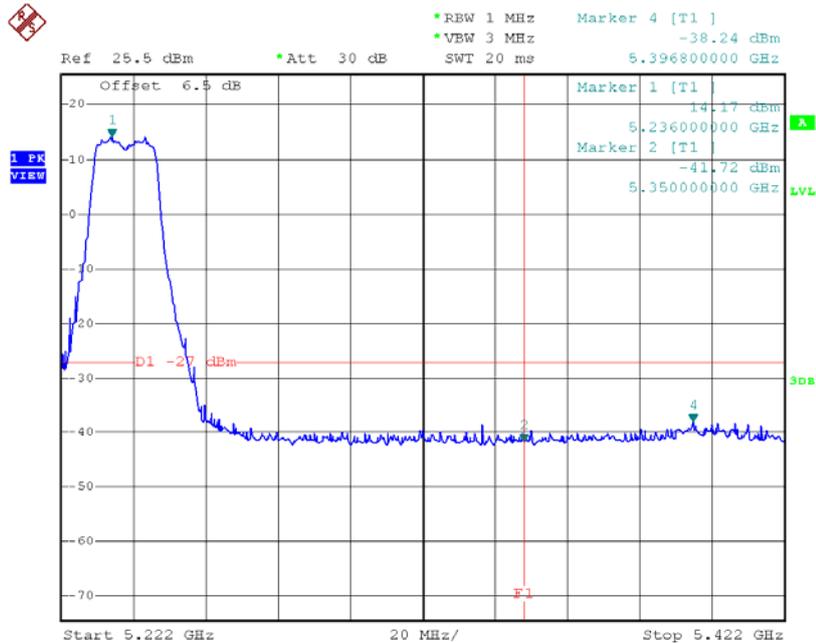

Date: 26.JUL.2015 11:57:32


Test Mode: UNII-1/TX AC40 Mode_ANT A

TX mode CH38

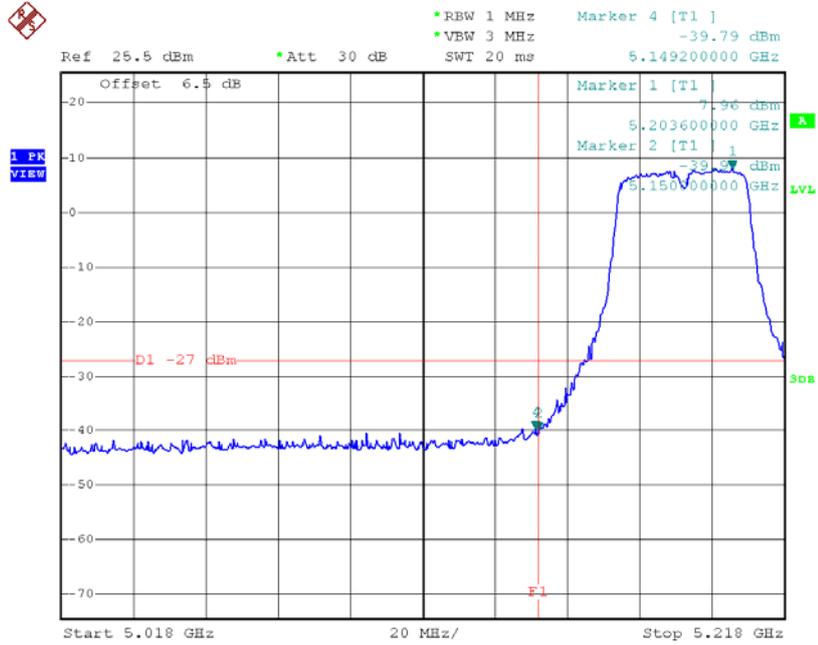

Date: 26.JUL.2015 14:31:50


TX mode CH46

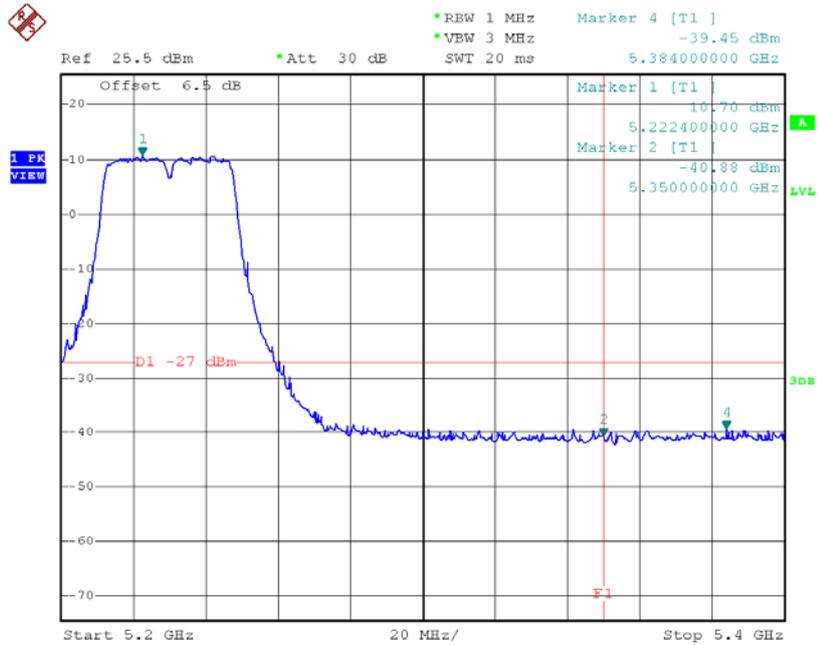

Date: 26.JUL.2015 14:32:52


Test Mode: UNII-1/TX AC40 Mode_ANT B

TX mode CH38

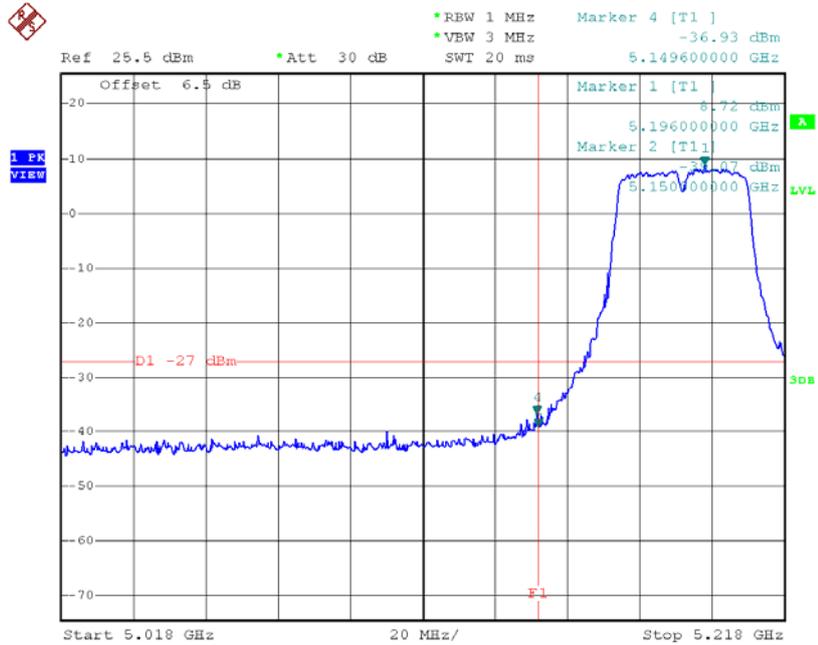

Date: 26.JUL.2015 14:19:56


TX mode CH46

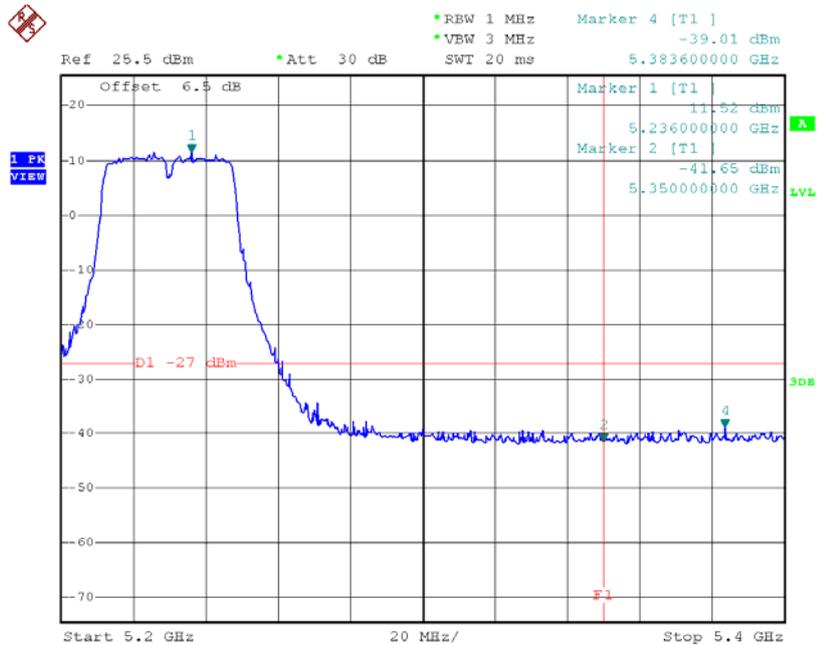

Date: 26.JUL.2015 14:21:25


Test Mode: UNII-1/TX AC40 Mode_ANT C

TX mode CH38

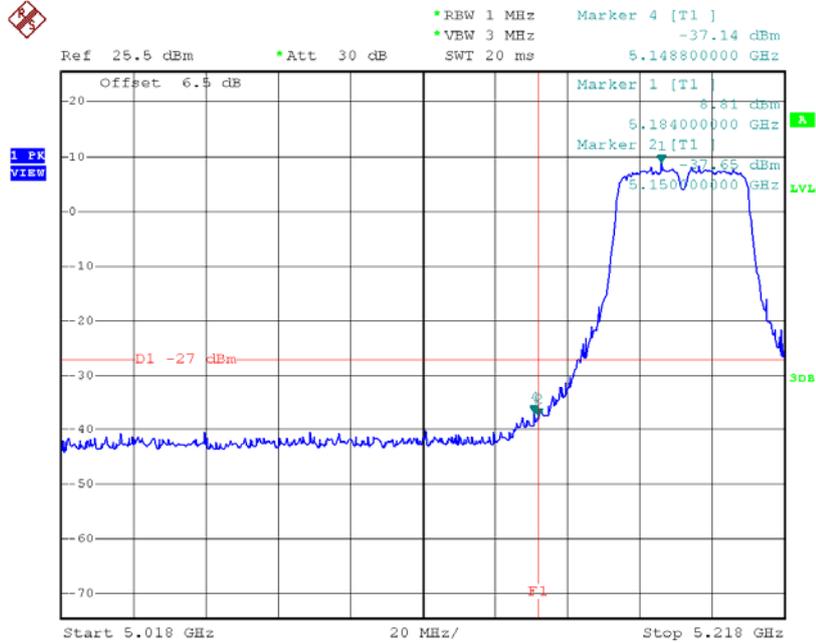

Date: 26.JUL.2015 14:10:24


TX mode CH46

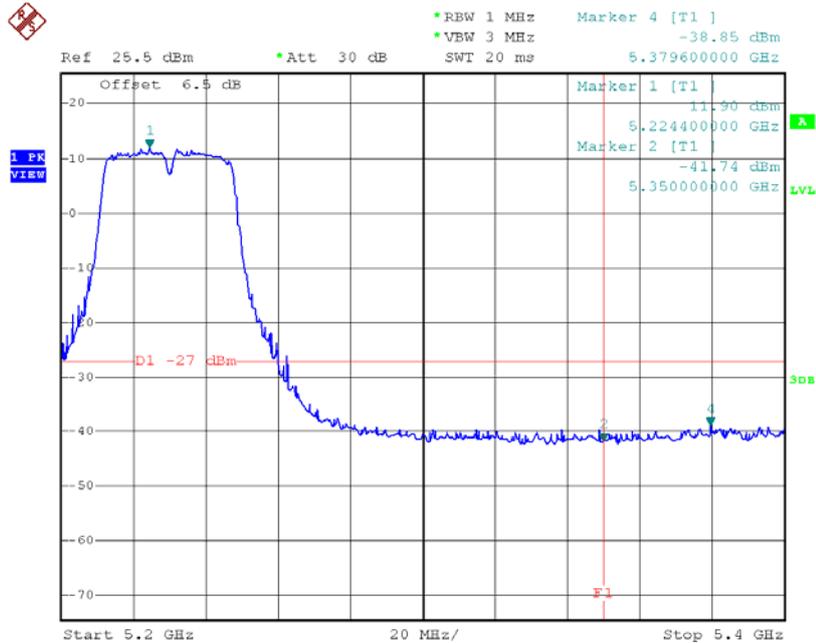


Date: 26.JUL.2015 14:11:32

Test Mode: UNII-1/TX AC80 Mode_ANT A

TX mode CH42

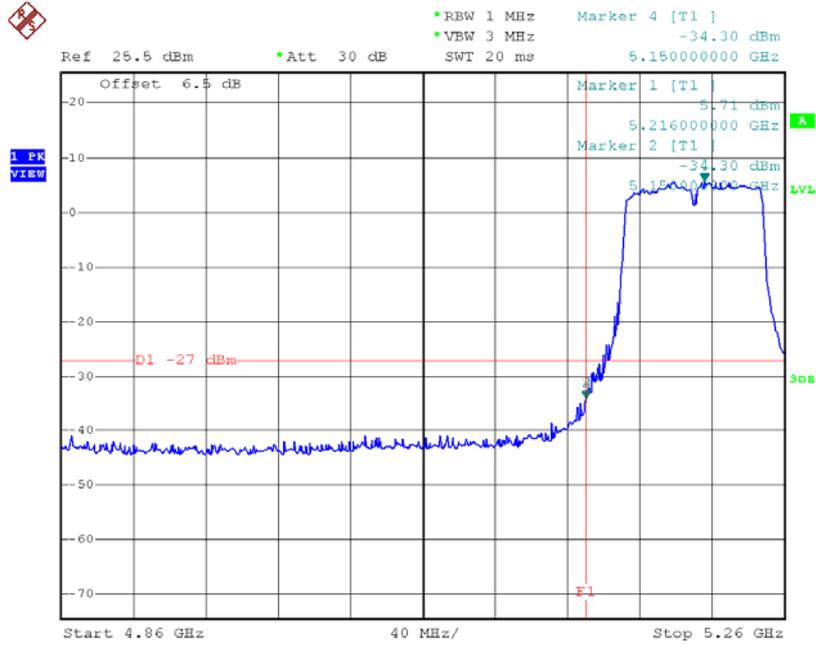


Date: 26.JUL.2015 14:42:06

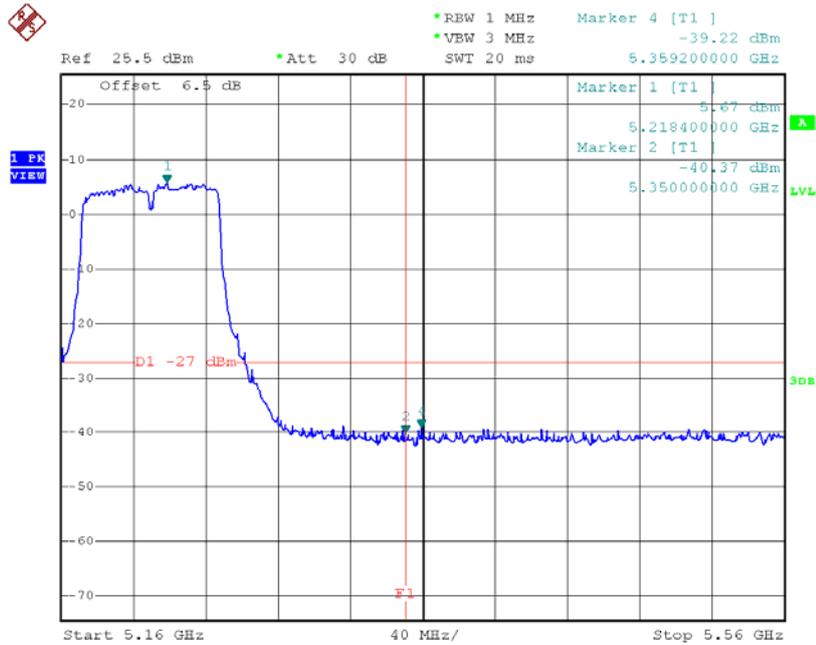


Date: 26.JUL.2015 14:42:14

Test Mode: UNII-1/TX AC80 Mode_ANT B

TX mode CH42

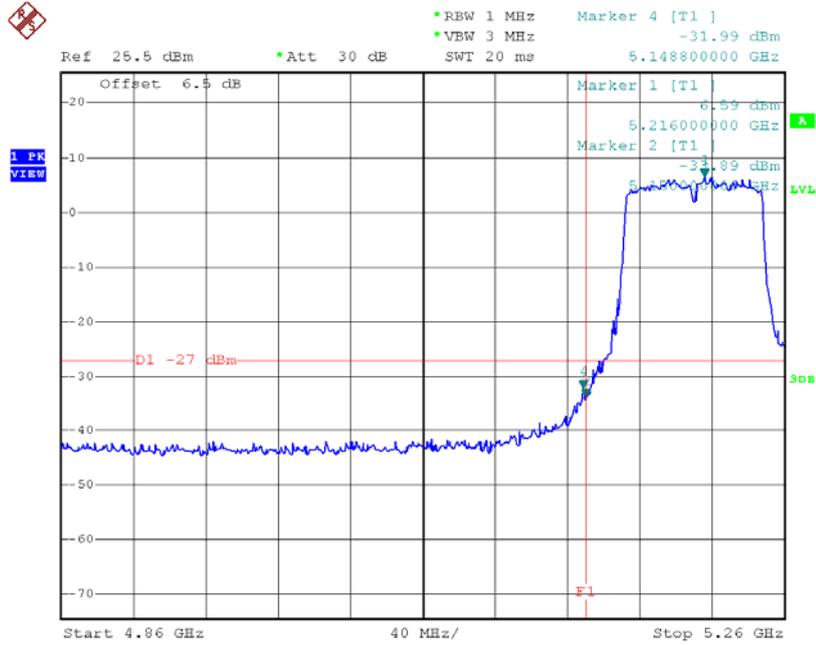


Date: 26.JUL.2015 14:49:01

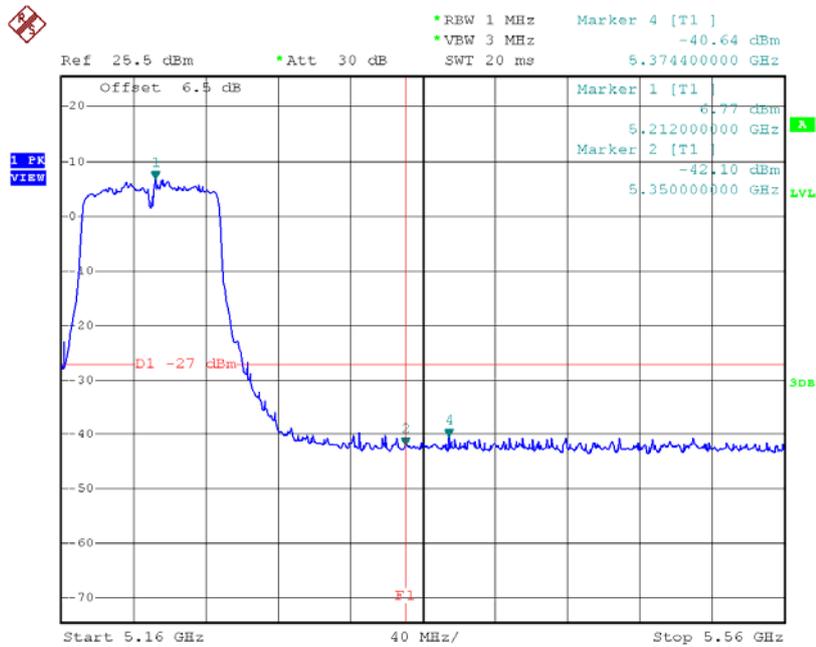

Date: 26.JUL.2015 14:49:08


Test Mode: UNII-2A/TX AC20 Mode_ANT A

TX mode CH52

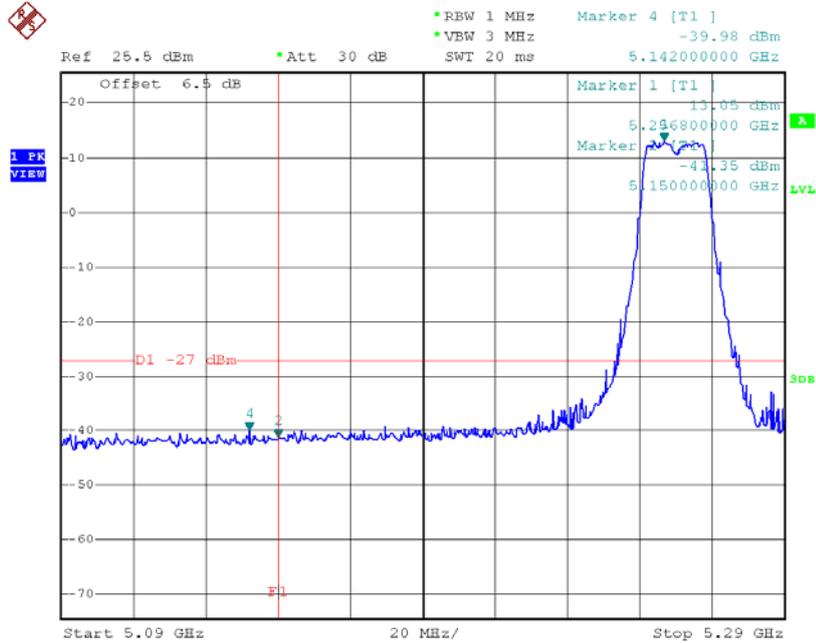

Date: 26.JUL.2015 13:30:32


TX mode CH64

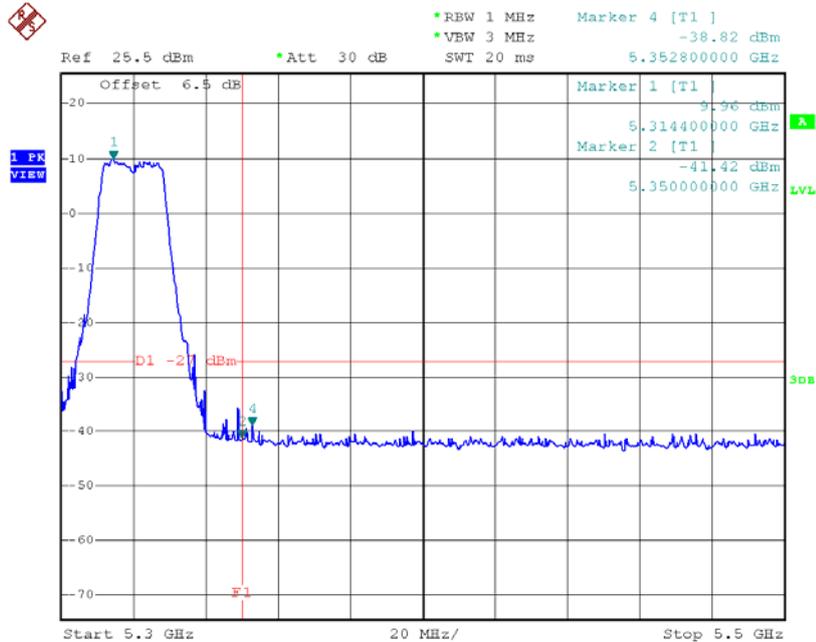

Date: 26.JUL.2015 13:32:17


Test Mode: UNII-2A/TX AC20 Mode_ANT B

TX mode CH52

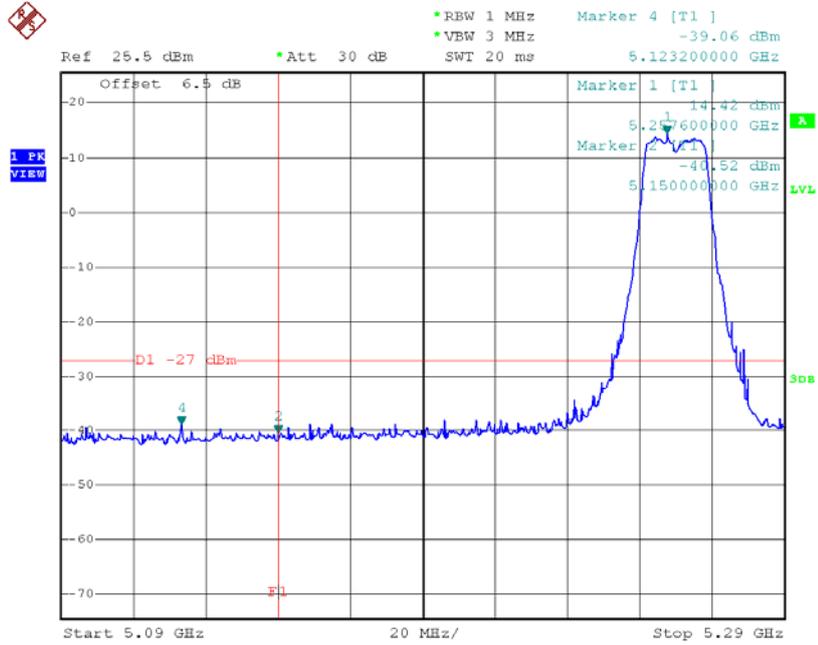

Date: 26.JUL.2015 13:18:20


TX mode CH64

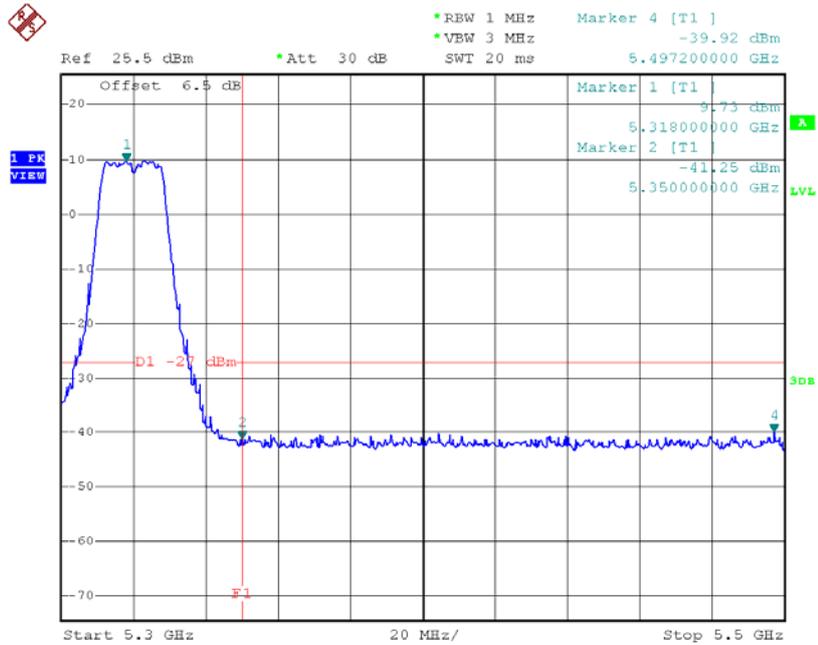

Date: 26.JUL.2015 13:20:11


Test Mode: UNII-2A/TX AC20 Mode_ANT C

TX mode CH52

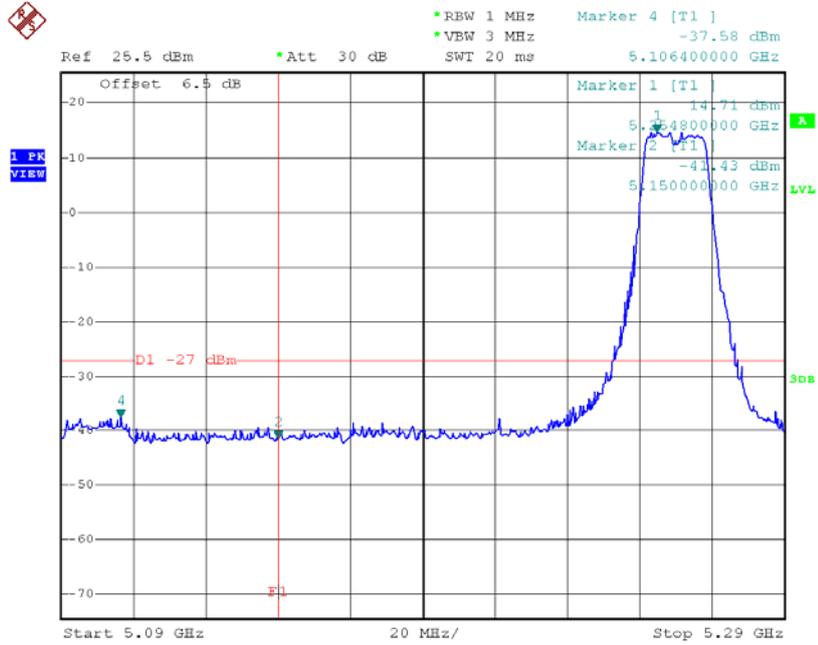

Date: 26.JUL.2015 11:58:36

TX mode CH64

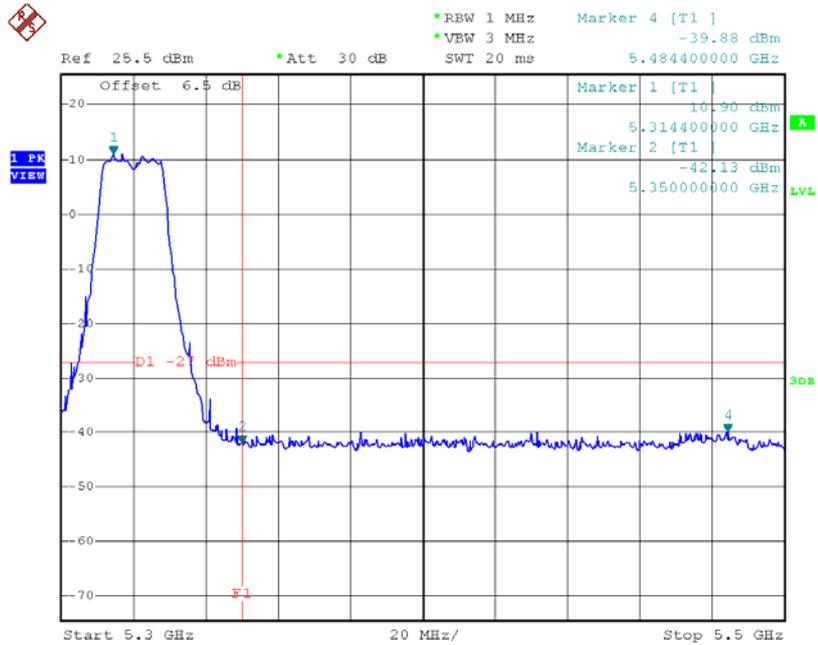

Date: 26.JUL.2015 12:00:23