

FCC Radio Test Report

FCC ID: QISB315S-22VERB

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1802C116
Equipment : LTE CPE
Model Name : B315s-22
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Feb. 24, 2018
Date of Test : Feb. 24, 2018 ~ Mar. 24, 2018
Issued Date : Mar. 27, 2018
Tested by : BTL Inc.

Technical Engineer

:

Shawn Xiao

(Shawn Xiao)

Authorized Signatory

:

Steven Lu

(Steven Lu)

B T L I N C .

No.3,Jinshagang 1st Road, Shixia,Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION	11
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . TEST RESULT	13
4.1 OUTPUT POWER MEASUREMENT	13
4.1.1 LIMIT	13
4.1.2 TEST PROCEDURE	13
4.1.3 TESTSETUP LAYOUT	13
4.1.4 TEST DEVIATION	13
4.1.5 TEST RESULTS	13
4.2 OCCUPIED BANDWIDTH MEASUREMENT	14
4.2.1 TEST PROCEDURE	14
4.2.2 TEST SETUP LAYOUT	14
4.2.3 TEST DEVIATION	14
4.2.4 TEST RESULTS	14
4.3 CONDUCTED EMISSIONS MEASUREMENT	15
4.3.1 LIMIT	15
4.3.2 TEST PROCEDURES	15
4.3.3 TESTSETUP LAYOUT	15
4.3.4 TESTDEVIATION	15
4.3.5 TEST RESULTS	15
4.4 RADIATED EMISSIONS MEASUREMENT	16
4.4.1 LIMIT	16
4.4.2 TEST PROCEDURES	16
4.4.3 TESTSETUP LAYOUT	16
4.4.4 TESTDEVIATION	17
4.4.5 TEST RESULTS (9KHZ TO 30MHZ)	17
4.4.6 TEST RESULTS (30MHZ TO 1000MHZ)	17
4.4.7 TEST RESULTS (ABOVE 1000MHZ)	17
4.5 BAND EDGE MEASUREMENT	18

Table of Contents	Page
4.5.1 LIMIT	18
4.5.2 TEST PROCEDURES	18
4.5.3 TESTSETUP LAYOUT	18
4.5.4 TESTDEVIATION	18
4.5.5 TEST RESULTS	18
4.6 PEAK TO AVERAGE RATIO MEASUREMENT	19
4.6.1 LIMIT	19
4.6.2 TEST PROCEDURES	19
4.6.3 TESTSETUP LAYOUT	19
4.6.4 TESTDEVIATION	19
4.6.5 TEST RESULTS	19
4.7 FREQUENCY STABILITY MEASUREMENT	20
4.7.1 LIMIT	20
4.7.2 TEST PROCEDURES	20
4.7.3 TESTSETUP LAYOUT	20
4.7.4 TESTDEVIATION	20
4.7.5 TEST RESULTS	20
5. LIST OF MEASUREMENT EQUIPMENTS	21
APPENDIX A - OUTPUT POWER	23
APPENDIX B - OCCUPIED BANDWIDTH	28
APPENDIX C - CONDUCTED EMISSIONS	37
APPENDIX D - RADIATED EMISSION (9KHZ TO 30MHZ)	40
APPENDIX E - RADIATED EMISSION (30MHZ TO 1GHZ)	77
APPENDIX F - RADIATED EMISSION (ABOVE 1GHZ)	90
APPENDIX G - BAND EDGE	127
APPENDIX H - PEAK TO AVERAGE RATIO	132
APPENDIX I - FREQUENCY STABILITY	137

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-3-1802C116	Original Issue.	Mar. 27, 2018

1. CERTIFICATION

Equipment : LTE CPE
Brand Name : HUAWEI
Model Name : B315s-22
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Feb, 24, 2018 ~ Mar, 24, 2018
Test Sample : Engineering Sample
Standard(s) : 47 CFR FCC Part 27
47 CFR FCC Part 2 & ANSI/TIA-603-D-2010
KDB 971168 D01 Power Meas License Digital Systems v03

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-3-1802C116) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the LTE Band 38 part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 27 & Part 2			
Standard(s) Section	Test Item	Judgment	Tested By
2.1046 27.50(d)(4)	Radiated power	PASS	Paul Li
2.1046 27.50(d)(4)	Conducted Output Power	PASS	Paul Li
2.1049 27.53(h)	Occupied Bandwidth	PASS	Paul Li
2.1051 27.53(h)	Conducted Spurious Emissions	PASS	Paul Li
2.1053 27.53(h)	Radiated Spurious Emissions	PASS	Paul Li
27.53(h)	Band Edge Measurements	PASS	Paul Li
27.50	Peak To Average Ratio	PASS	Paul Li
2.1055 27.54	Frequency Stability	PASS	Paul Li

NOTE:

(1) "N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$.

The BTL measurement uncertainty as below table:

A. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (1m)	CISPR	18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	LTE CPE			
Brand Name	HUAWEI			
Model Name	B315s-22			
Model Difference	N/A			
Modulation Type	LTE	UP: QPSK,16QAM DL: QPSK,16QAM		
Operation Frequency	LTE 38 (Channel Bandwidth: 5MHz)	2572.5 ~ 2617.5 MHz		
	LTE 38 (Channel Bandwidth: 10MHz)	2575 ~ 2615 MHz		
	LTE 38 (Channel Bandwidth: 15MHz)	2577.5 ~ 2612.5 MHz		
	LTE 38 (Channel Bandwidth: 20MHz)	2580 ~ 2610 MHz		
Max. EIRP Power	LTE 38 (Channel Bandwidth: 5MHz)	QPSK	26.88	dBm
		16QAM	25.85	dBm
	LTE 38 (Channel Bandwidth: 10MHz)	QPSK	27.33	dBm
		16QAM	26.26	dBm
	LTE 38 (Channel Bandwidth: 15MHz)	QPSK	26.75	dBm
		16QAM	25.73	dBm
	LTE 38 (Channel Bandwidth: 20MHz)	QPSK	26.58	dBm
		16QAM	25.91	dBm
Antenna Type	Internal Antenna and External Antenna			
Antenna Gain	4dBi for Internal Antenna, 1 dBi and 3 dBi for External Antenna			
Hardware Version	WL1B310I			
Software Version	21.328.03.DM2.00			
IMEI No.	867962031001418			
Power Source	Supplied from AC/DC adapter.			
Power Rating	Input: 100V~240V 50/60 Hz,0.5A Output: 12V --- 1A			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT contains following accessory devices.

Item	Mfr/Brand	Model.
LAN Cable	N/A	N/A
TEL Cable	N/A	N/A
Adapter	Huawei Technologies Co.,Ltd.	HW-120100E01 HW-120100B01 HW-120100U01 HW-120100A6W HW-120100BW HW-120100EW

3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X-plane for EIRP and X-axis for radiated emission.


Following channel(s) was (were) selected for the final test as listed below:

LTE BAND 38					
Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
EIRP	37775 to 38225	37775, 38000, 38225	5MHz	QPSK, 16QAM	1RB/12RB/25RB
	37800 to 38200	37800, 38000, 38200	10MHz	QPSK, 16QAM	1RB/25RB/50RB
	37825 to 38175	37825, 38000, 38175	15MHz	QPSK, 16QAM	1RB/36RB/75RB
	37850 to 38150	37850, 38000, 38150	20MHz	QPSK, 16QAM	1RB/50RB/100RB
Frequency Stability	37775 to 38225	38000	5MHz	QPSK	1 RB
	37800 to 38200	38000	10MHz	QPSK	1 RB
	37825 to 38175	38000	15MHz	QPSK	1 RB
	37850 to 38150	38000	20MHz	QPSK	1 RB
Occupied Bandwidth	37775 to 38225	37775, 38000, 38225	5MHz	QPSK, 16QAM	25RB
	37800 to 38200	37800, 38000, 38200	10MHz	QPSK, 16QAM	50RB
	37825 to 38175	37825, 38000, 38175	15MHz	QPSK, 16QAM	75 RB
	37850 to 38150	37850, 38000, 38150	20MHz	QPSK, 16QAM	100RB
Peak to Average Ratio	37775 to 38225	37775, 38000, 38225	5MHz	QPSK, 16QAM	1 RB
	37800 to 38200	37800, 38000, 38200	10MHz	QPSK, 16QAM	1 RB
	37825 to 38175	37825, 38000, 38175	15MHz	QPSK, 16QAM	1 RB
	37850 to 38150	37850, 38000, 38150	20MHz	QPSK, 16QAM	1 RB
Band Edge	37775 to 38225	37775, 38225	5MHz	QPSK, 16QAM	1RB/25RB
	37800 to 38200	37800, 38200	10MHz	QPSK, 16QAM	1RB/50RB
	37825 to 38175	37825, 38175	15MHz	QPSK, 16QAM	1RB/75RB
	37850 to 38150	37850, 38150	20MHz	QPSK, 16QAM	1RB/100RB
Conducted Emission	37775 to 38225	38000	5MHz	QPSK	1 RB
	37850 to 38150	38000	20MHz	QPSK	1 RB
Radiated Emission	37775 to 38225	38000	5MHz	QPSK	1 RB
	37850 to 38150	38000	20MHz	QPSK	1 RB

EUT TEST CONDITIONS:

Test Item	Environmental Conditions	Test Voltage
EIRP	24°C, 63%RH	DC 12.00V
Conducted Output Power	25°C, 65%RH	DC 12.00V
Occupied Bandwidth	25°C, 65%RH	DC 12.00V
Conducted Emission	25°C, 65%RH	DC 12.00V
Radiated Emission	25°C, 60%RH	AC 120V/60Hz
Band Edge	25°C, 65%RH	DC 12.00V
Peak to Average Ratio	25°C, 65%RH	DC 12.00V
Frequency Stability	25°C, 65%RH	DC 12.00V, DC 10.80V, DC 13.20V

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

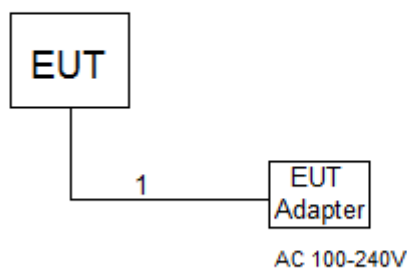

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	DC cable

4. TEST RESULT

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

Mobile / Portable station are limited to 2 watts e.i.r.p. (LTE 38)

4.1.2 TEST PROCEDURE

EIRP/ERP:

EIRP= Conducted Power +Antenan gain


ERP power=EIPR power-2.15dBi.

Conducted Power:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TESTSETUP LAYOUT

Conducted Power Measurement



4.1.4 TEST DEVIATION

No deviation

4.1.5 TEST RESULTS


Please refer to the Appendix A.

4.2 OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 TEST PROCEDURE

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.

4.2.2 TEST SETUP LAYOUT

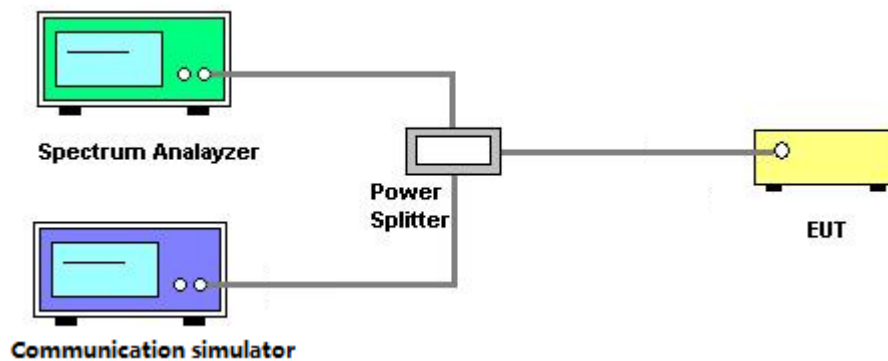

4.2.3 TEST DEVIATION

No deviation

4.2.4 TEST RESULTS

Please refer to the Appendix B.

4.3 CONDUCTED EMISSIONS MEASUREMENT


4.3.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.3.2 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v03 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set $RBW \geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10 \log(P)](dB)$
 $= [30 + 10 \log(P)](dBm) - [43 + 10 \log(P)](dB)$
 $= -13dBm$

4.3.3 TESTSETUP LAYOUT

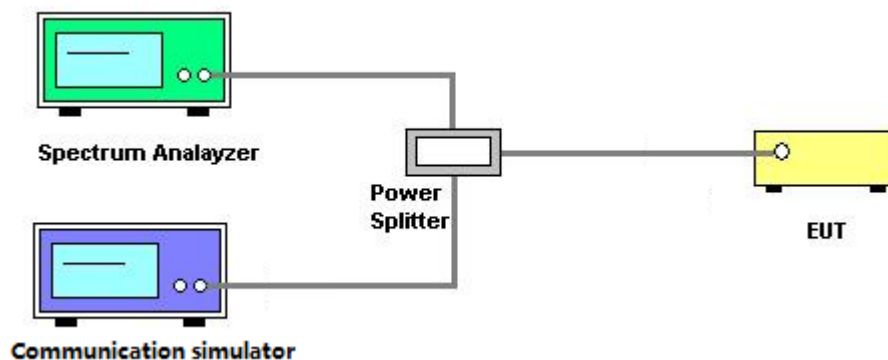

4.3.4 TESTDEVIATION

No deviation

4.3.5 TEST RESULTS

Please refer to the Appendix C.

4.4 RADIATED EMISSIONS MEASUREMENT

4.4.1 LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.



4.4.2 TEST PROCEDURES

1. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
3. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.4.3 TESTSETUP LAYOUT

Below 30MHz

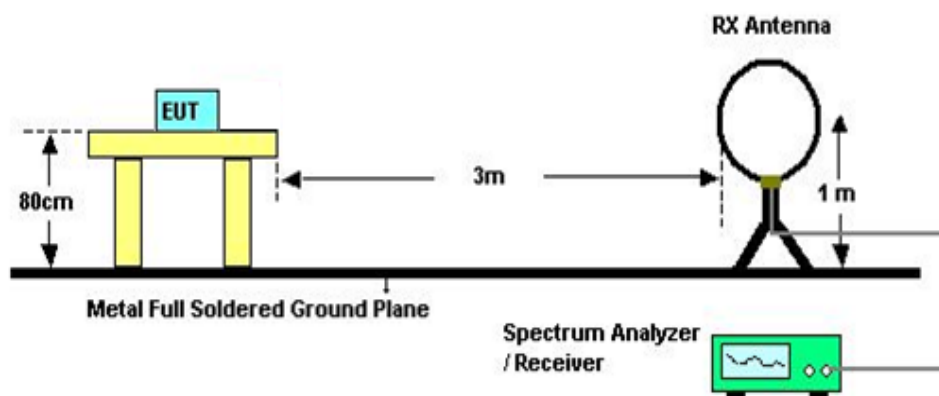

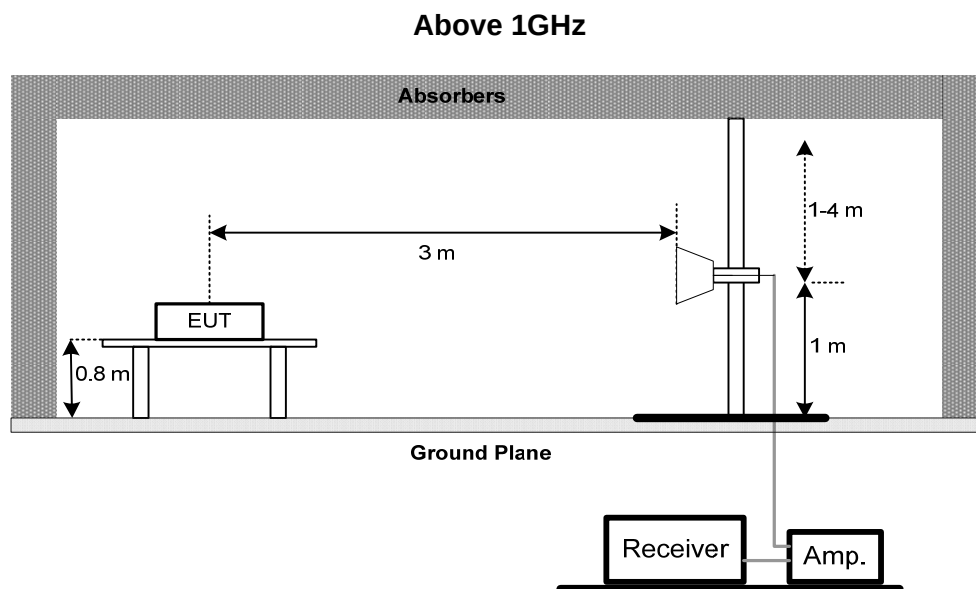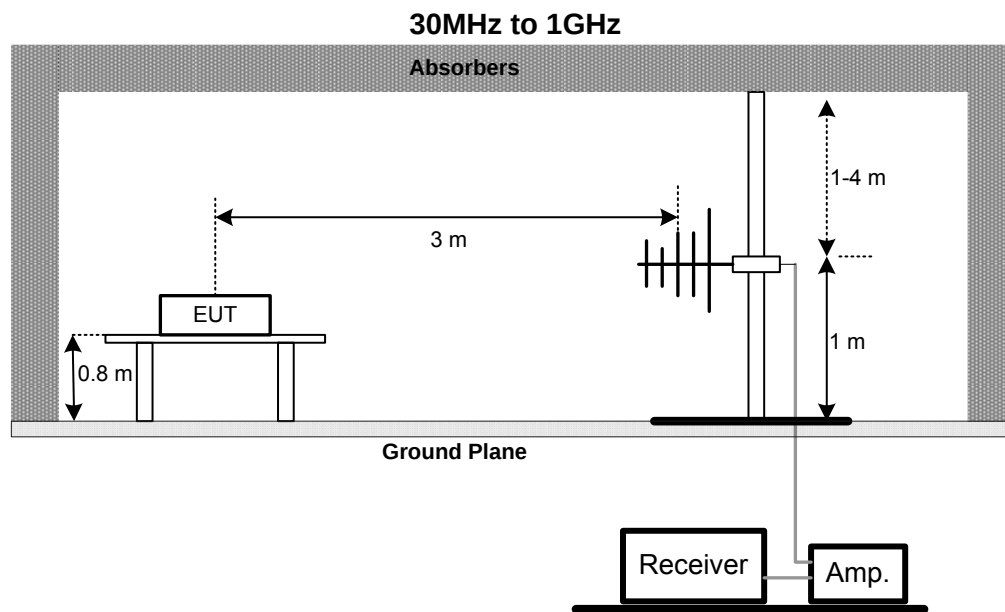

4.4.4 TESTDEVIATION

No deviation

4.4.5 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix D.

4.4.6 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Appendix E.

4.4.7 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix F.

4.5 BAND EDGE MEASUREMENT

4.5.1 LIMIT

For operations in the 704-716 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.


However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 1710–1755 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

4.5.2 TEST PROCEDURES

1. All measurements were done at low and high operational frequency range.
2. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 13kHz and VB of the spectrum is 51kHz (LTE Bandwidth 1.4MHz).
3. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz (LTE Bandwidth 3MHz).
4. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (LTE Bandwidth 5MHz/10MHz).
5. Record the max trace plot into the test report.

4.5.3 TESTSETUP LAYOUT

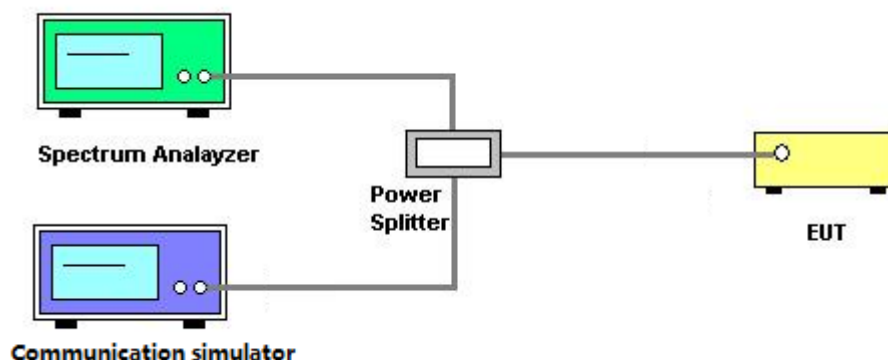

4.5.4 TESTDEVIATION

No deviation

4.5.5 TEST RESULTS

Please refer to the Appendix G.

4.6 PEAK TO AVERAGE RATIO MEASUREMENT


4.6.1 LIMIT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.6.3 TESTSETUP LAYOUT

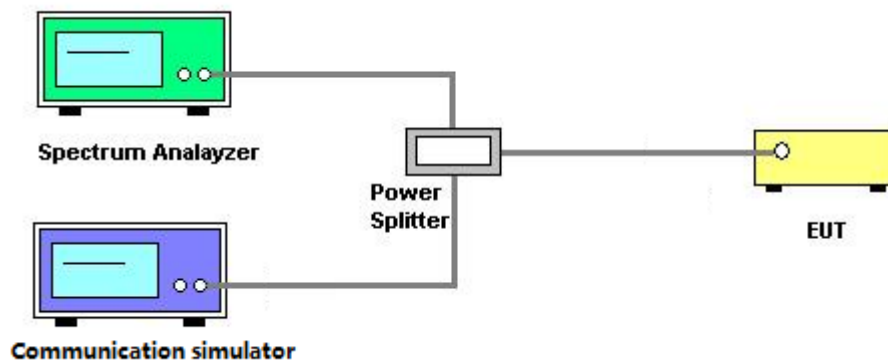

4.6.4 TESTDEVIATION

No deviation

4.6.5 TEST RESULTS

Please refer to the Appendix H.

4.7 FREQUENCY STABILITY MEASUREMENT


4.7.1 LIMIT

1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.7.2 TEST PROCEDURES

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

4.7.3 TESTSETUP LAYOUT

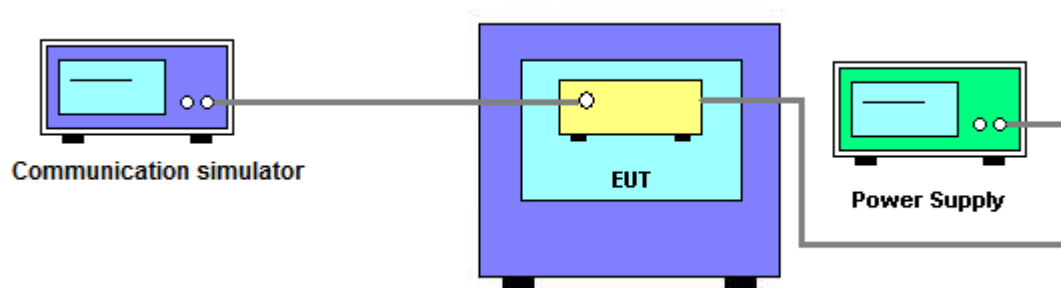

4.7.4 TESTDEVIATION

No deviation

4.7.5 TEST RESULTS

Please refer to the Appendix I.

5. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emission & ERP or EIRP Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
3	Amplifier	HP	8447D	2944A09673	Oct. 19, 2018
4	HighPass Filter	Wairwright Instruments Gmbh	WHK 1.5/15G-10ST	11	Mar. 11, 2019
5	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1710/1785-1690/1805-60/12SS	38	Mar. 11, 2019
6	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 824/849-810/863-60/9SS	7	Mar. 11, 2019
7	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 880/915-860/935-60/9SS	14	Mar. 11, 2019
8	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1850/1910-1830/1930-60/10SS	17	Mar. 11, 2019
9	HighPass Filter	Wairwright Instruments Gmbh	WHK3.1/18G-10SS	24	Mar. 11, 2019
10	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 11, 2019
11	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
12	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
13	wideband radio communication tester	R&S	CMW500	152372	Mar. 11, 2019
14	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	Jun. 26, 2018
15	Cable	emci	EMC104-SM-SM-12000(12m)	N/A	Jun. 26, 2018
16	Controller	ETS-Lindgren	2090	N/A	N/A
17	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
18	Antenna	EM	EM-6876-1	230	Feb. 07, 2019
19	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 11, 2019
20	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 08, 2018

Conducted Emission & Band Edge & Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 11, 2019
2	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 11, 2019
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S +	331000910-1	Mar. 11, 2019
4	wideband radio communication tester	R&S	CMW500	152372	Mar. 11, 2019
5	Cable	N/A	RG316(0.3m)	N/A	Jul. 05, 2018
6	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 11, 2019
2	Multi-output DC Power Supply	GW Instek	GPC-3030DN	EK880675	Sep. 26, 2020
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S +	331000910-1	Mar. 11, 2019
4	wideband radio communication tester	R&S	CMW500	152372	Mar. 11, 2019
5	Const Temp,& Humidity Chamber	Bell	BTH-50C	20170306001	Mar. 26, 2018
6	Cable	N/A	RG316(0.3m)	N/A	Jul. 05, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - OUTPUT POWER

Conducted Power:

LTE Band / BW	Modulation	RB Siset	RB Offset	Low CH	Mid CH	High CH
				37775 CH	38000 CH	38225 CH
				2572.5 MHz	2595 MHz	2617.5 MHz
38 / 5M	QPSK	1	0	21.74	22.02	22.08
		1	12	22.60	22.88	22.87
		1	24	21.95	22.15	22.16
		12	0	21.30	21.44	21.52
		12	6	21.53	21.75	21.66
		12	13	21.44	21.61	21.61
		25	0	21.26	21.49	21.40
	16QAM	1	0	20.68	21.10	21.04
		1	12	21.43	21.85	21.85
		1	24	20.84	21.14	21.14
		12	0	21.22	21.34	21.40
		12	6	21.47	21.63	21.55
		12	13	21.40	21.52	21.52
		25	0	21.25	21.39	21.36

LTE Band / BW	Modulation	RB Siset	RB Offset	Low CH	Mid CH	High CH
				37800 CH	38000 CH	38200 CH
				2575 MHz	2595 MHz	2615 MHz
38 / 10M	QPSK	1	0	22.16	22.29	22.16
		1	24	23.25	23.29	23.33
		1	49	21.60	21.82	21.83
		25	0	21.51	21.61	21.53
		25	12	21.85	21.91	21.92
		25	25	21.57	21.62	21.56
		50	0	21.48	21.47	21.59
	16QAM	1	0	21.01	21.03	20.98
		1	24	22.04	21.93	22.26
		1	49	20.50	20.46	20.66
		25	0	21.36	21.39	21.40
		25	12	21.72	21.68	21.64
		25	25	21.43	21.48	21.11
		50	0	21.33	21.30	21.05

LTE Band / BW	Modulation	RB Sizer	RB Offset	Low CH	Mid CH	High CH
				37825 CH	38000 CH	38175 CH
				2577.5 MHz	2595 MHz	2612.5 MHz
38 / 15M	QPSK	1	0	22.28	22.36	22.31
		1	37	22.68	22.73	22.75
		1	74	21.72	22.16	22.10
		36	0	21.26	21.37	21.22
		36	19	21.32	21.49	21.48
		36	39	21.04	21.39	21.26
		75	0	21.14	21.35	21.19
	16QAM	1	0	21.32	20.99	21.58
		1	37	21.61	21.30	21.73
		1	74	20.78	21.19	21.02
		36	0	21.32	21.38	21.21
		36	19	21.41	21.54	21.54
		36	39	21.13	21.40	21.28
		75	0	21.21	21.40	21.20

LTE Band / BW	Modulation	RB Sizer	RB Offset	Low CH	Mid CH	High CH
				37850 CH	38000 CH	38150 CH
				2580 MHz	2595 MHz	2610 MHz
38 / 20M	QPSK	1	0	22.27	22.11	22.58
		1	50	22.12	22.42	22.04
		1	99	21.92	22.03	21.90
		50	0	21.01	21.05	21.14
		50	25	21.02	20.99	20.87
		50	50	21.08	21.26	21.01
		100	0	21.10	21.21	21.01
	16QAM	1	0	21.73	21.16	21.91
		1	50	21.19	21.44	21.14
		1	99	21.34	21.19	21.01
		50	0	21.02	21.07	21.18
		50	25	21.01	20.99	20.93
		50	50	21.11	21.27	21.09
		100	0	21.10	21.26	21.08

EIRP Power:

LTE Band / BW	Modulation	RB Siset	RB Offset	Low CH	Mid CH	High CH
				37775 CH	38000 CH	38225 CH
				2572.5 MHz	2595 MHz	2617.5 MHz
38 / 5M	QPSK	1	0	25.74	26.02	26.08
		1	12	26.60	26.88	26.87
		1	24	25.95	26.15	26.16
		12	0	25.30	25.44	25.52
		12	6	25.53	25.75	25.66
		12	13	25.44	25.61	25.61
		25	0	25.26	25.49	25.40
	16QAM	1	0	24.68	25.10	25.04
		1	12	25.43	25.85	25.85
		1	24	24.84	25.14	25.14
		12	0	25.22	25.34	25.40
		12	6	25.47	25.63	25.55
		12	13	25.40	25.52	25.52
		25	0	25.25	25.39	25.36

LTE Band / BW	Modulation	RB Siset	RB Offset	Low CH	Mid CH	High CH
				37800 CH	38000 CH	38200 CH
				2575 MHz	2595 MHz	2615 MHz
38 / 10M	QPSK	1	0	26.16	26.29	26.16
		1	24	27.25	27.29	27.33
		1	49	25.60	25.82	25.83
		25	0	25.51	25.61	25.53
		25	12	25.85	25.91	25.92
		25	25	25.57	25.62	25.56
		50	0	25.48	25.47	25.59
	16QAM	1	0	25.01	25.03	24.98
		1	24	26.04	25.93	26.26
		1	49	24.50	24.46	24.66
		25	0	25.36	25.39	25.40
		25	12	25.72	25.68	25.64
		25	25	25.43	25.48	25.11
		50	0	25.33	25.30	25.05

LTE Band / BW	Modulation	RB Sizer	RB Offset	Low CH	Mid CH	High CH
				37825 CH	38000 CH	38175 CH
				2577.5 MHz	2595 MHz	2612.5 MHz
38 / 15M	QPSK	1	0	26.28	26.36	26.31
		1	37	26.68	26.73	26.75
		1	74	25.72	26.16	26.10
		36	0	25.26	25.37	25.22
		36	19	25.32	25.49	25.48
		36	39	25.04	25.39	25.26
		75	0	25.14	25.35	25.19
	16QAM	1	0	25.32	24.99	25.58
		1	37	25.61	25.30	25.73
		1	74	24.78	25.19	25.02
		36	0	25.32	25.38	25.21
		36	19	25.41	25.54	25.54
		36	39	25.13	25.40	25.28
		75	0	25.21	25.40	25.20

LTE Band / BW	Modulation	RB Sizer	RB Offset	Low CH	Mid CH	High CH
				37850 CH	38000 CH	38150 CH
				2580 MHz	2595 MHz	2610 MHz
38 / 20M	QPSK	1	0	26.27	26.11	26.58
		1	50	26.12	26.42	26.04
		1	99	25.92	26.03	25.90
		50	0	25.01	25.05	25.14
		50	25	25.02	24.99	24.87
		50	50	25.08	25.26	25.01
		100	0	25.10	25.21	25.01
	16QAM	1	0	25.73	25.16	25.91
		1	50	25.19	25.44	25.14
		1	99	25.34	25.19	25.01
		50	0	25.02	25.07	25.18
		50	25	25.01	24.99	24.93
		50	50	25.11	25.27	25.09
		100	0	25.10	25.26	25.08

APPENDIX B - OCCUPIED BANDWIDTH


LTE Band 38_5M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
37775	2572.5	4.4923	37775	2572.5	4.4930
38000	2595	4.4834	38000	2595	4.4886
38225	2617.5	4.5031	38225	2617.5	4.5035
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
37775	2572.5	5.034	37775	2572.5	4.946
38000	2595	4.902	38000	2595	4.933
38225	2617.5	4.927	38225	2617.5	4.906

Spectrum Plot




LTE Band 38_10M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
37800	2575	9.0040	37800	2575	9.0040
38000	2595	8.9728	38000	2595	8.9728
38200	2615	8.9919	38200	2615	8.9919
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
37800	2575	10.010	37800	2575	10.010
38000	2595	9.856	38000	2595	9.856
38200	2615	9.929	38200	2615	9.929

Spectrum Plot

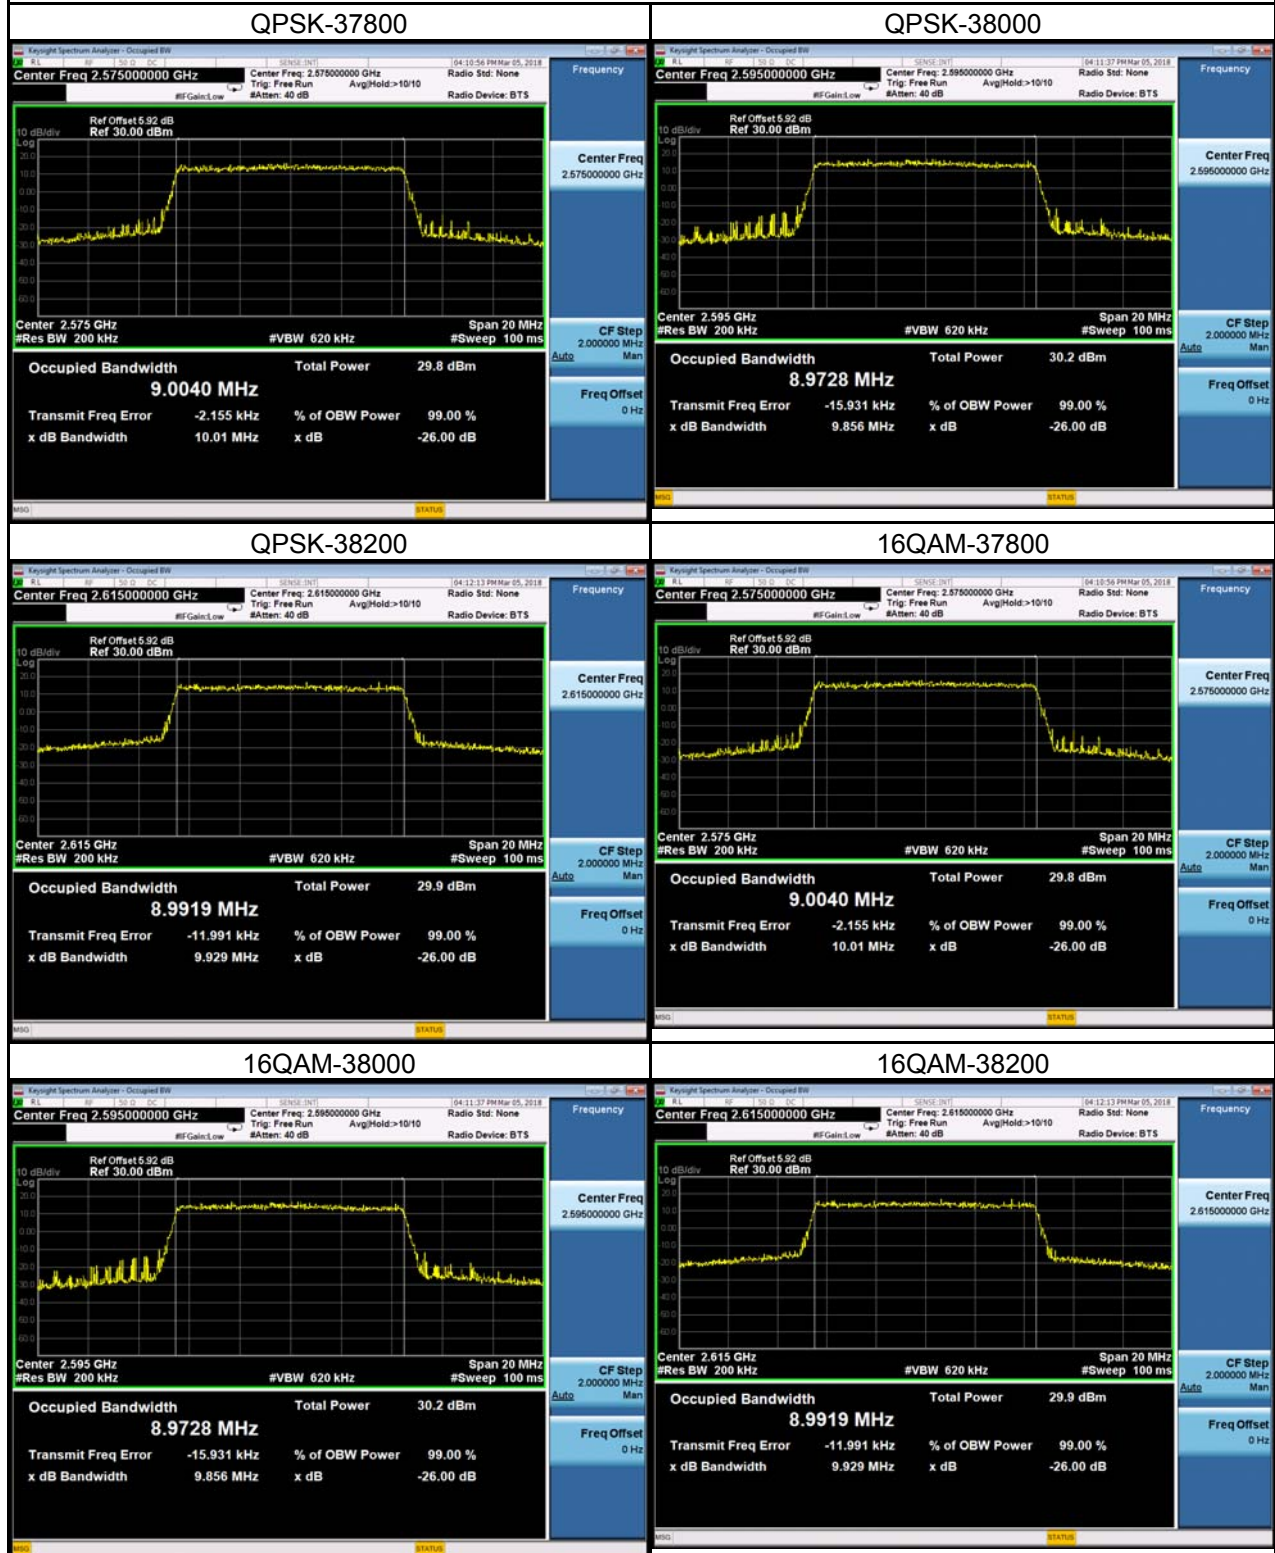

LTE Band 38_15M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
37825	2577.5	13.475	37825	2577.5	13.465
38000	2595	13.494	38000	2595	13.472
38175	2612.5	13.509	38175	2612.5	13.484
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
37825	2577.5	15.44	37825	2577.5	15.03
38000	2595	15.03	38000	2595	15.05
38175	2612.5	15.10	38175	2612.5	15.04


Spectrum Plot

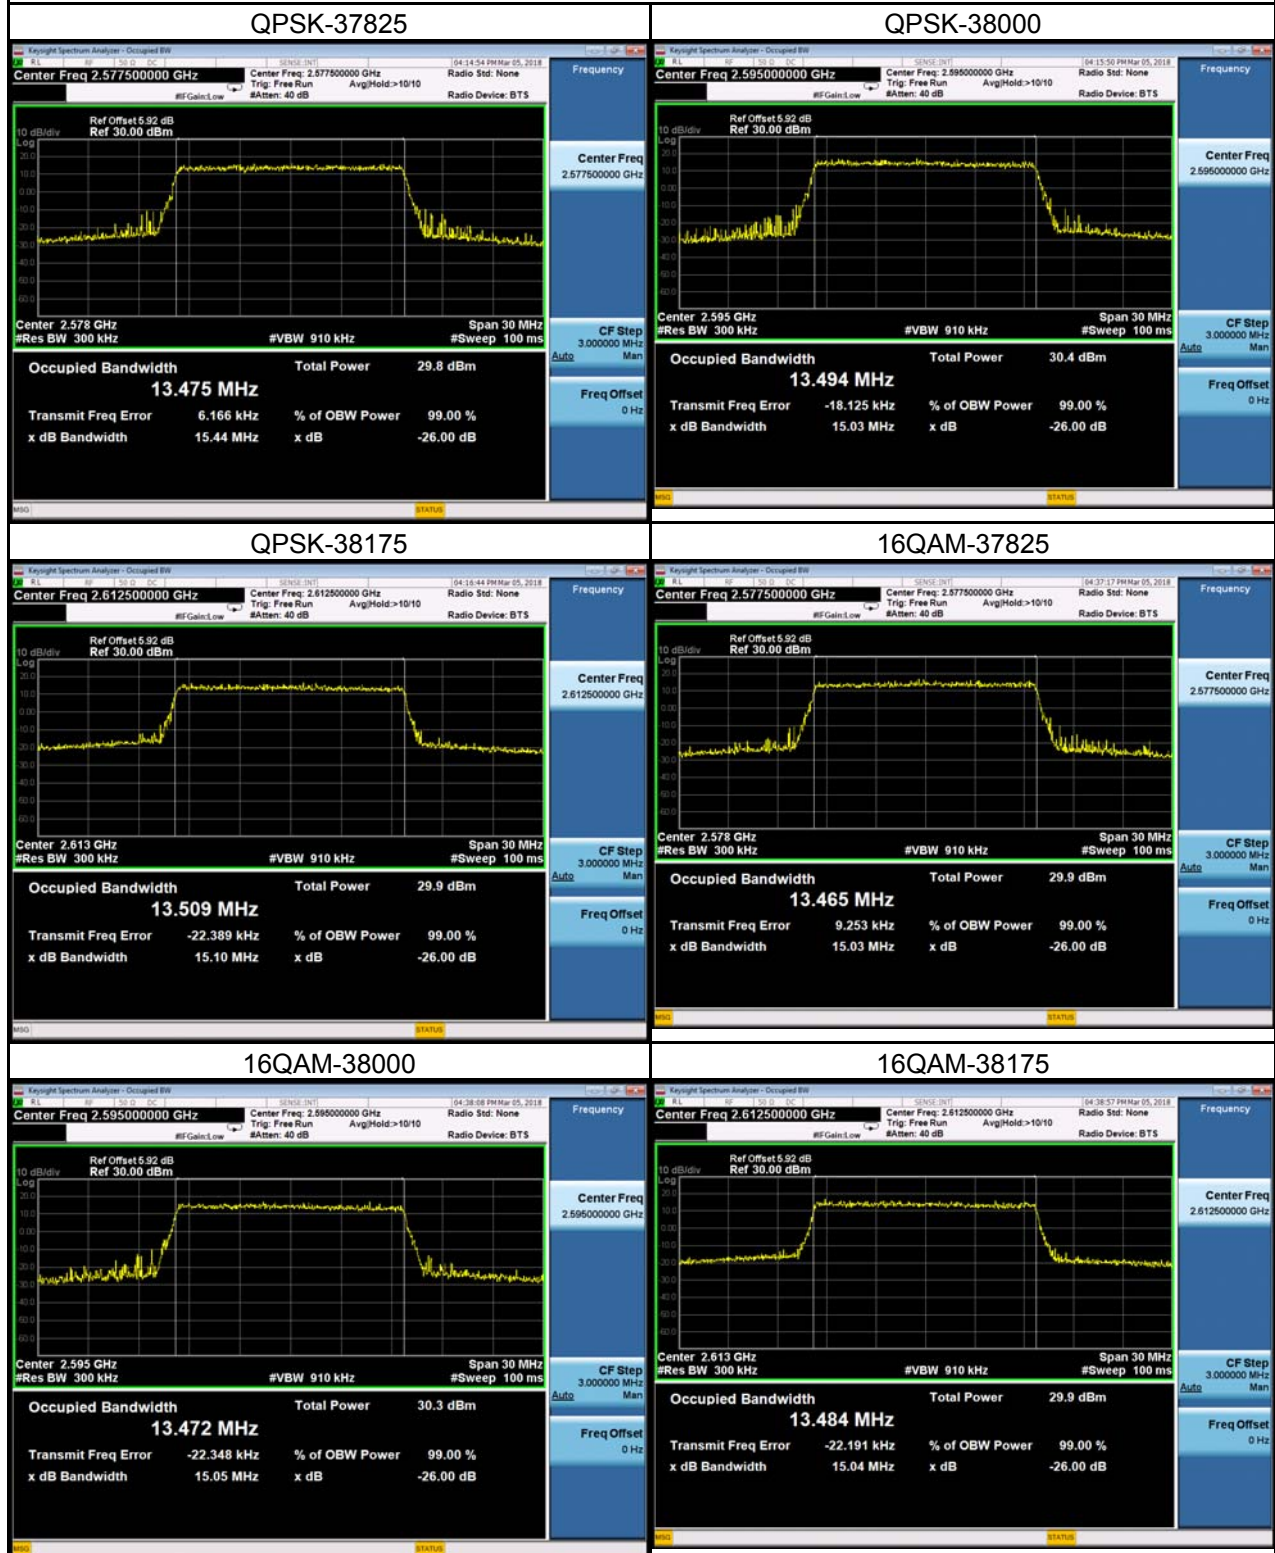


LTE Band 38_20M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
37850	2580	17.931	37850	2580	17.951
38000	2595	17.934	38000	2595	17.952
38150	2610	18.020	38150	2610	17.969
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
37850	2580	20.21	37850	2580	19.68
38000	2595	19.67	38000	2595	19.80
38150	2610	19.76	38150	2610	19.84

Spectrum Plot

QPSK-37850

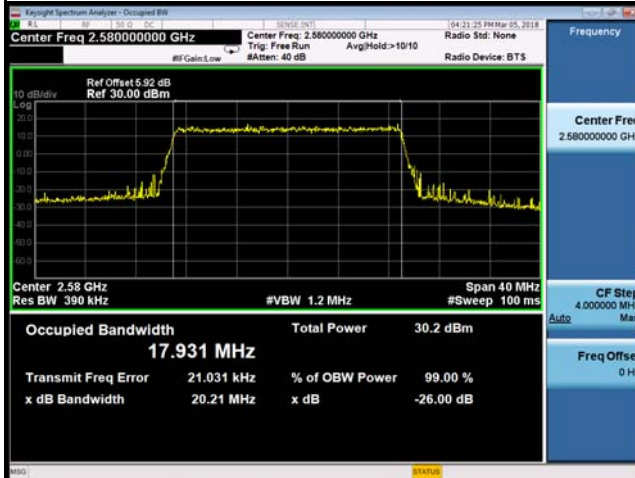

QPSK-38000

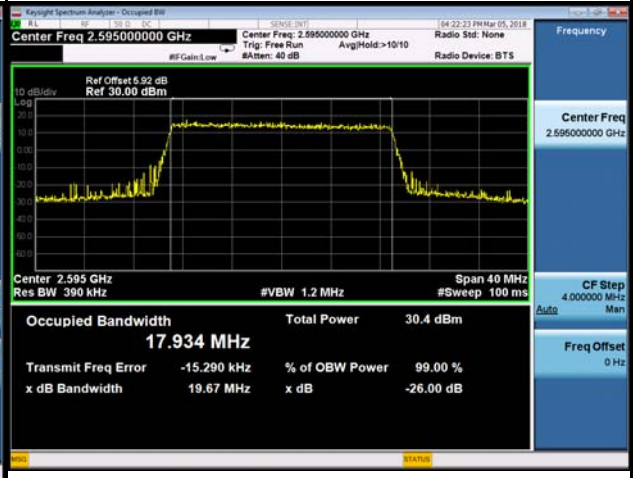

QPSK-38150



16QAM-37850






16QAM-38000






16QAM-38150



APPENDIX C - CONDUCTED EMISSIONS

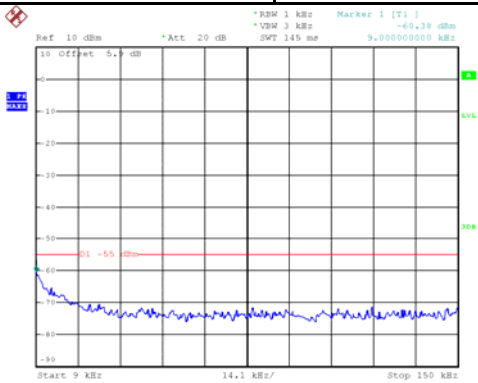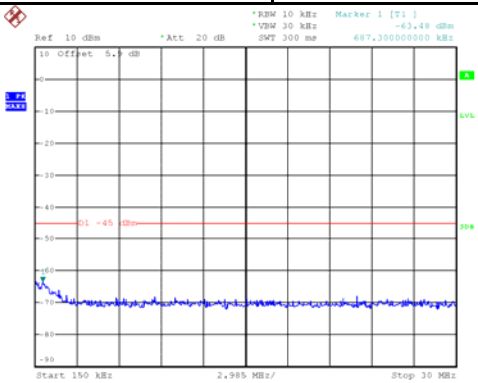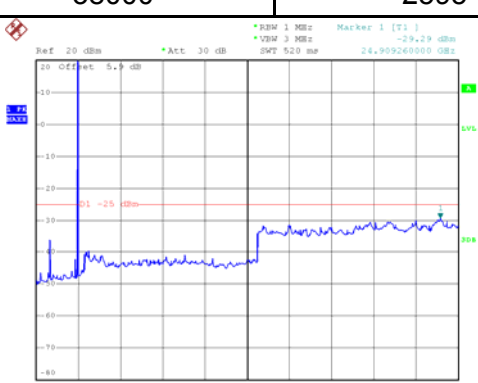
LTE Band 38_5M			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
37775	2572.5	38225	2617.5
 Date: 26.MAR.2018 15:34:07		 Date: 26.MAR.2018 15:31:50	
Channel	Frequency(MHz)	-	-
38000	2595	-	-
 Date: 20.MAR.2018 21:15:48		-	

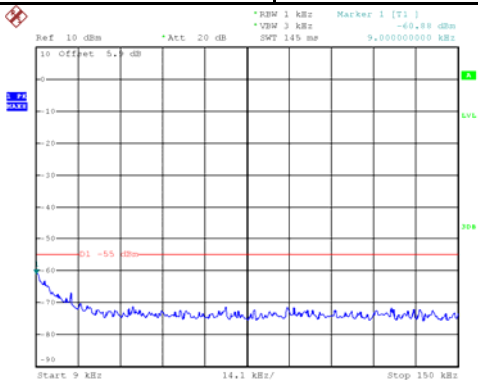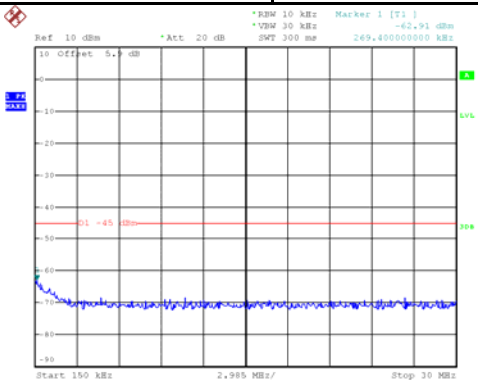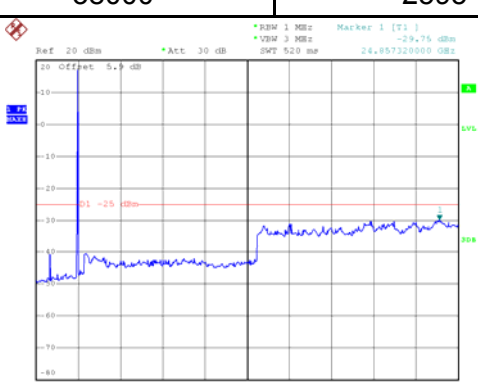LTE Band 38_20M			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
37850	2580	38150	2610
 Date: 26.MAR.2018 15:33:22		 Date: 26.MAR.2018 15:32:32	
Channel	Frequency(MHz)	-	-
38000	2595	-	-
 Date: 20.MAR.2018 21:14:56		-	

APPENDIX D - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode _Adapter: Fuhua_Internal Antenna


Ant 0°

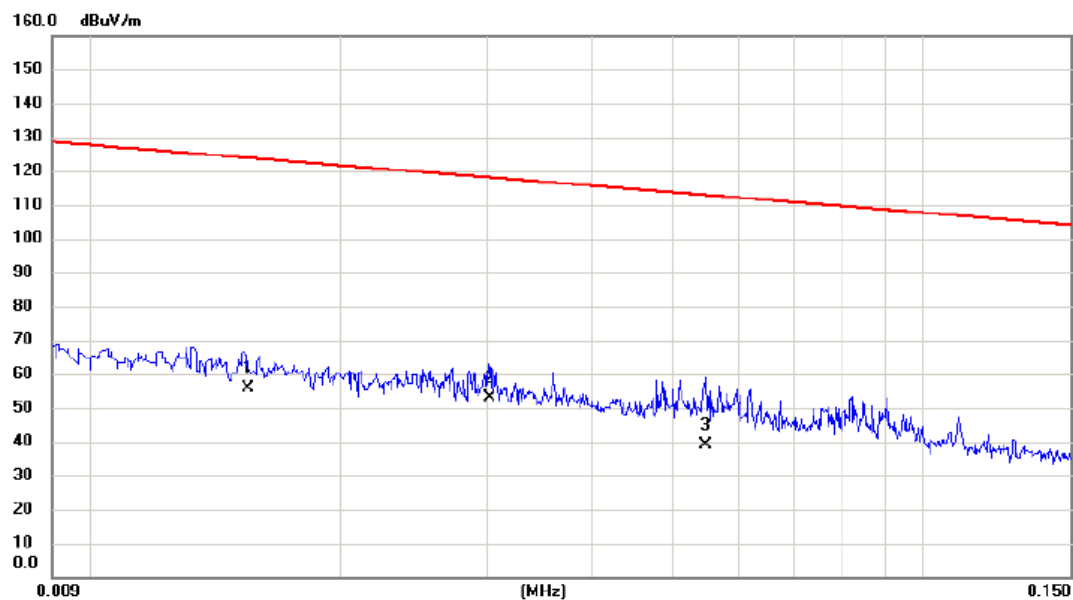

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0155	35.54	20.20	55.74	123.80	-68.06	AVG	
2	*	0.0302	33.63	19.31	52.94	118.00	-65.06	AVG	
3		0.0548	20.34	18.63	38.97	112.83	-73.86	AVG	

Test Mode: TX Mode_Adapter: Fuhua_Internal Antenna


Ant 0°

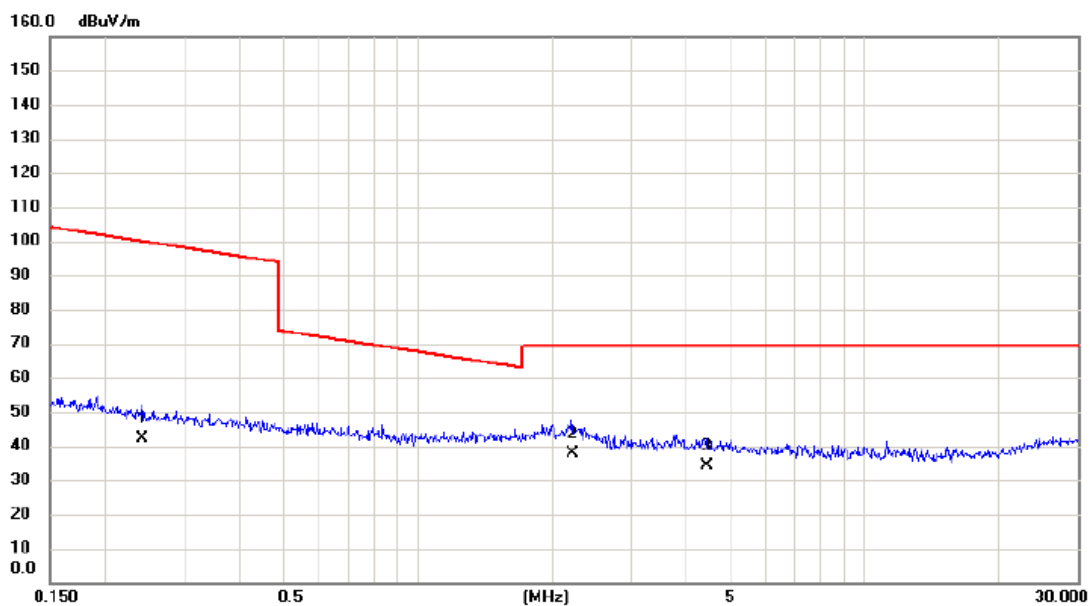

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2416	25.55	16.69	42.24	99.94	-57.70	AVG	
2	*	2.2132	22.24	15.45	37.69	69.54	-31.85	QP	
3		4.4305	19.46	14.70	34.16	69.54	-35.38	QP	

Test Mode: TX Mode _Adapter: Fuhua_Internal Antenna


Ant 90°

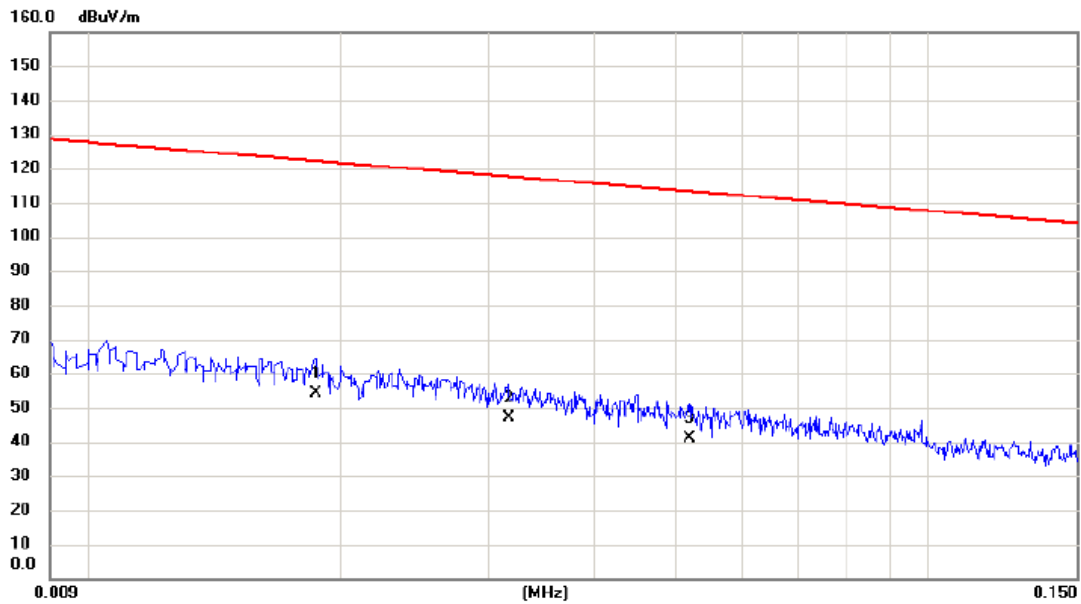

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0187	34.38	19.79	54.17	122.17	-68.00	AVG	
2		0.0317	27.69	19.27	46.96	117.58	-70.62	AVG	
3		0.0520	22.35	18.68	41.03	113.28	-72.25	AVG	

Test Mode: TX Mode_Adapter: Fuhua_Internal Antenna


Ant 90°

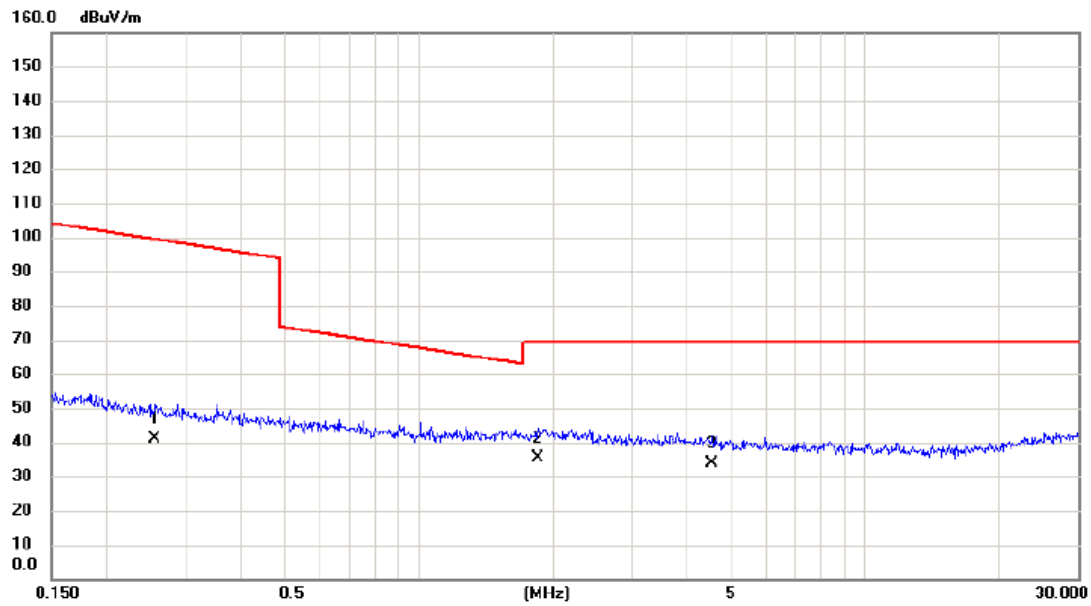

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2562	24.51	16.66	41.17	99.43	-58.26	AVG	
2	*	1.8483	19.76	15.57	35.33	69.54	-34.21	QP	
3		4.5254	18.98	14.64	33.62	69.54	-35.92	QP	

Test Mode: TX Mode _Adapter: Kuantech_Internal Antenna


Ant 0°

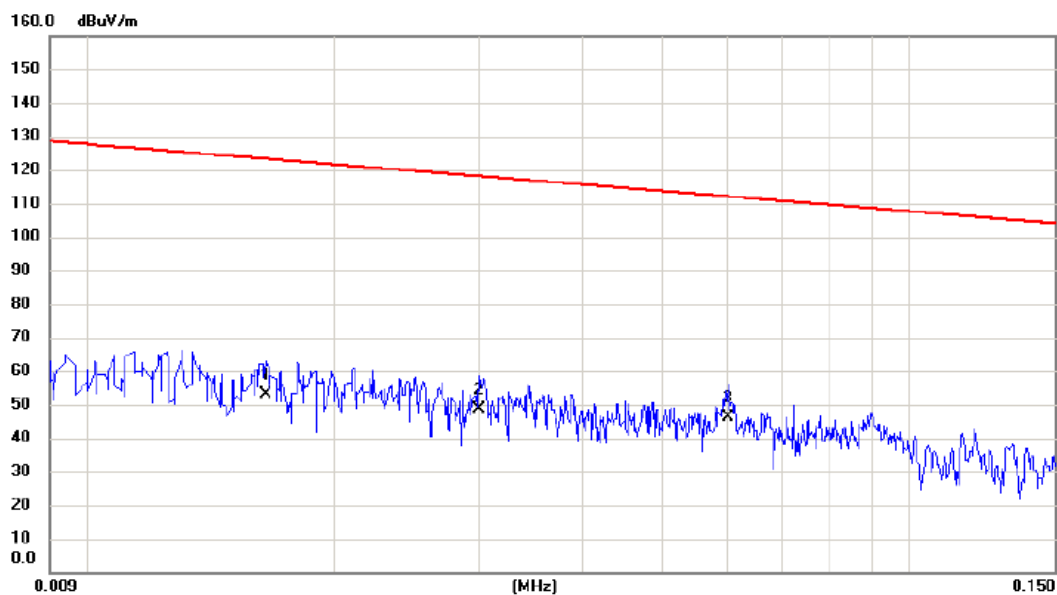

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0165	32.95	20.07	53.02	123.26	-70.24	AVG	
2		0.0300	29.39	19.32	48.71	118.06	-69.35	AVG	
3	*	0.0601	27.65	18.53	46.18	112.03	-65.85	AVG	

Test Mode: TX Mode _Adapter: Kuantech_Internal Antenna


Ant 0°

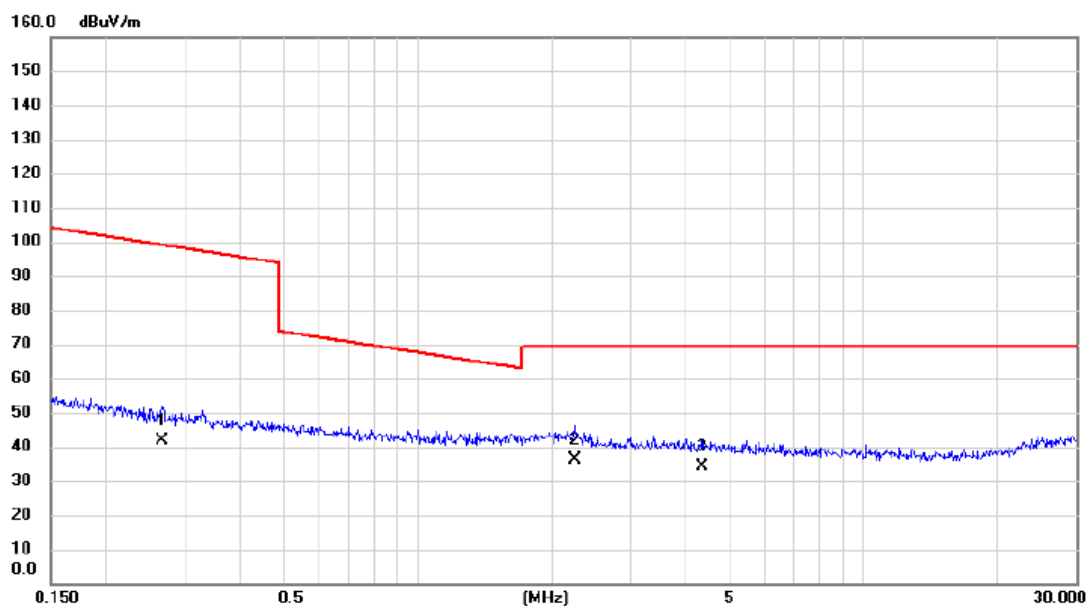

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2672	25.06	16.65	41.71	99.07	-57.36	AVG	
2	*	2.2486	20.67	15.44	36.11	69.54	-33.43	QP	
3		4.3376	19.60	14.76	34.36	69.54	-35.18	QP	

Test Mode: TX Mode _Adapter: Kuantech_Internal Antenna


Ant 90°

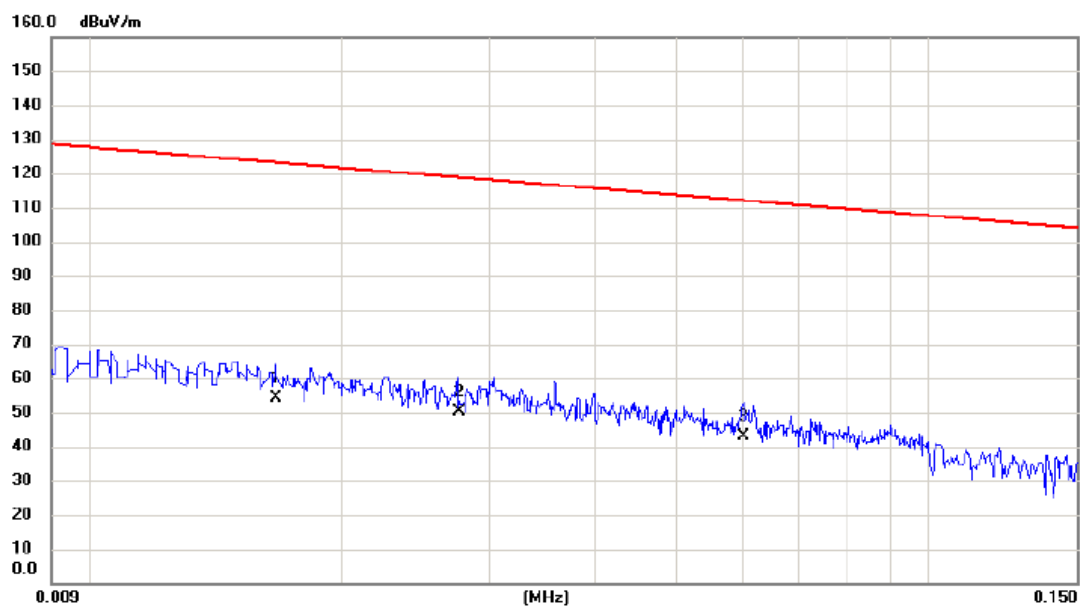

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0167	34.07	20.05	54.12	123.15	-69.03	AVG	
2	*	0.0276	30.96	19.39	50.35	118.79	-68.44	AVG	
3		0.0601	24.49	18.53	43.02	112.03	-69.01	AVG	

Test Mode: TX Mode _Adapter: Kuantech_Internal Antenna


Ant 90°

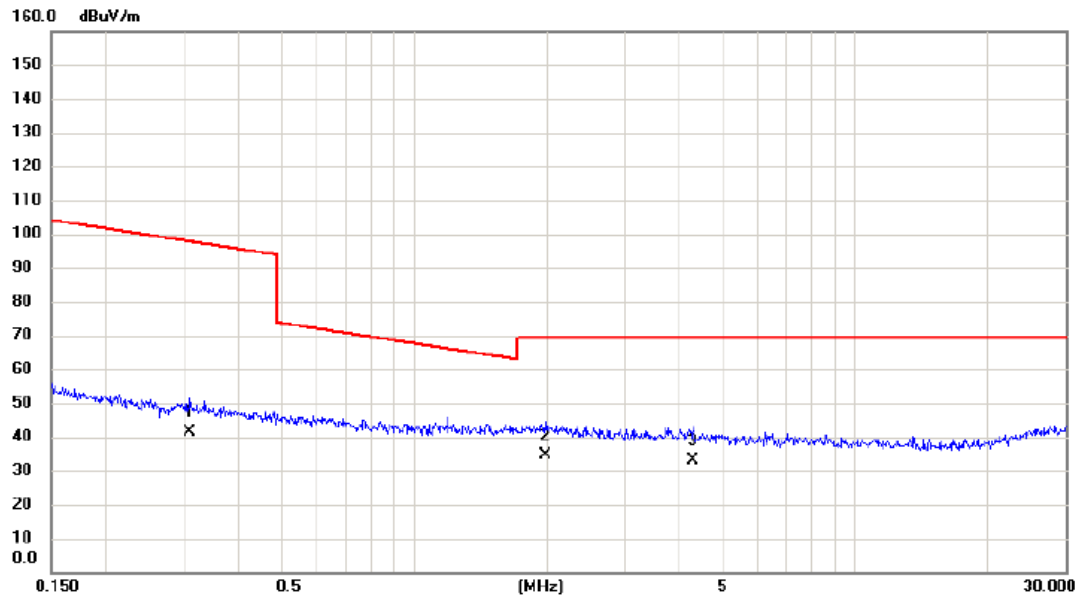

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3100	24.73	16.61	41.34	97.78	-56.44	AVG	
2	*	1.9906	19.03	15.51	34.54	69.54	-35.00	QP	
3		4.2918	18.04	14.78	32.82	69.54	-36.72	QP	

Test Mode: TX Mode _Adapter: HONOR_Internal Antenna


Ant 0°

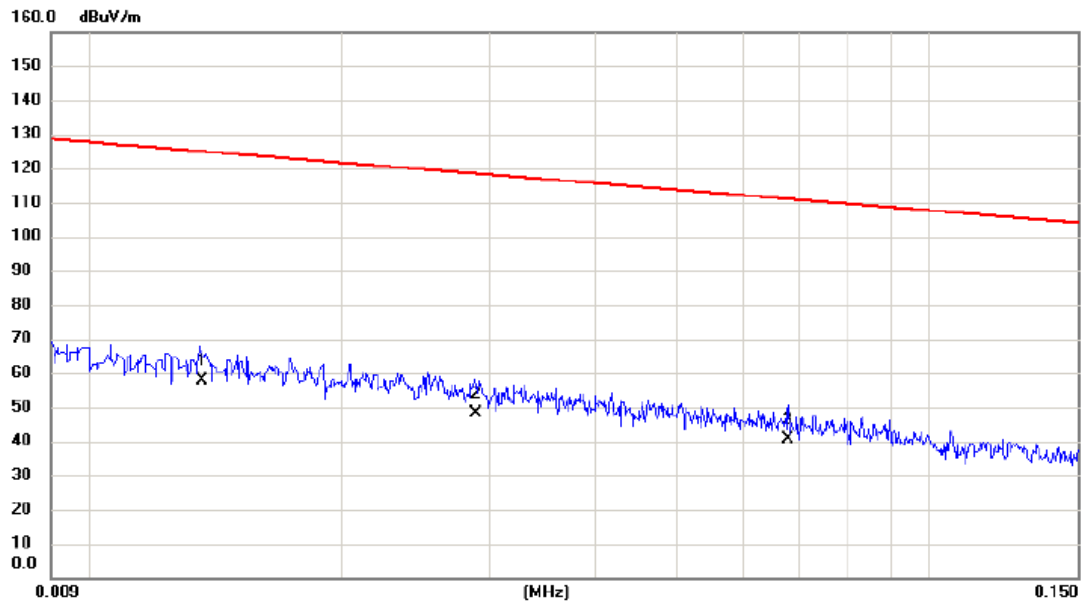

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0136	37.20	20.45	57.65	124.93	-67.28	AVG	
2		0.0288	29.00	19.36	48.36	118.42	-70.06	AVG	
3		0.0678	22.28	18.37	40.65	110.98	-70.33	AVG	

Test Mode: TX Mode _Adapter: HONOR_Internal Antenna


Ant 0°

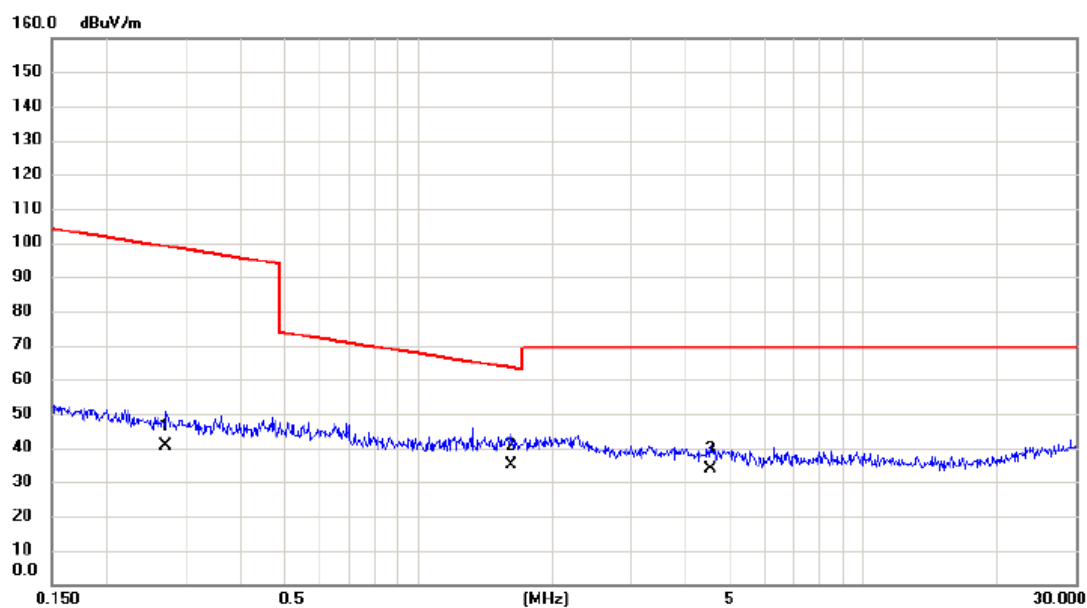

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2714	23.90	16.64	40.54	98.93	-58.39	AVG	
2	*	1.6105	19.39	15.66	35.05	63.47	-28.42	QP	
3		4.5254	18.99	14.64	33.63	69.54	-35.91	QP	

Test Mode: TX Mode _Adapter: HONOR_Internal Antenna


Ant 90°

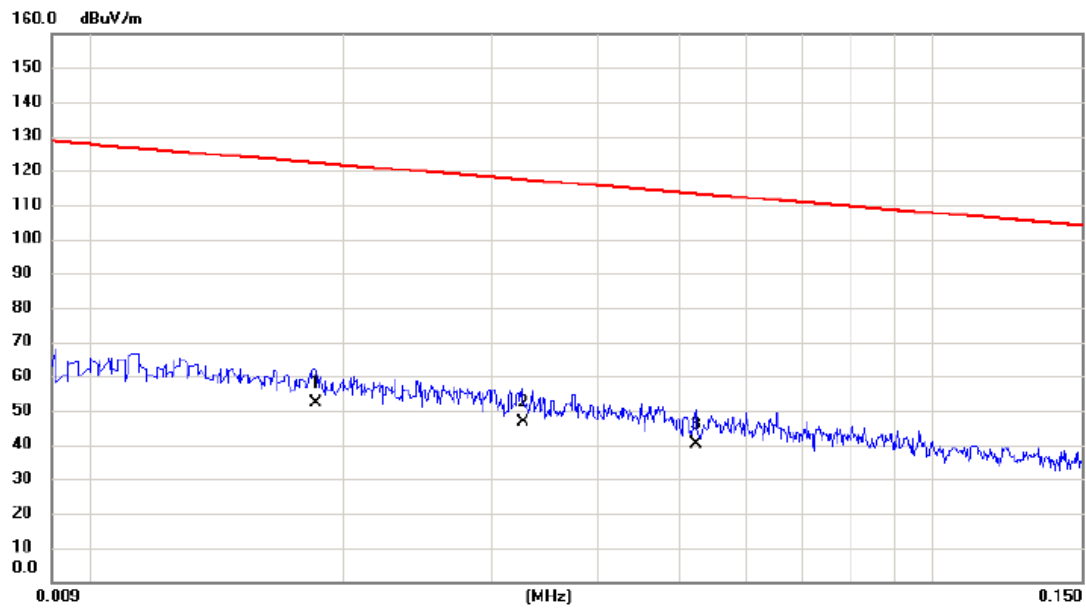

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0185	32.35	19.82	52.17	122.26	-70.09	AVG	
2		0.0326	27.51	19.24	46.75	117.34	-70.59	AVG	
3		0.0524	21.47	18.67	40.14	113.22	-73.08	AVG	

Test Mode: TX Mode _Adapter: HONOR_Internal Antenna


Ant 90°

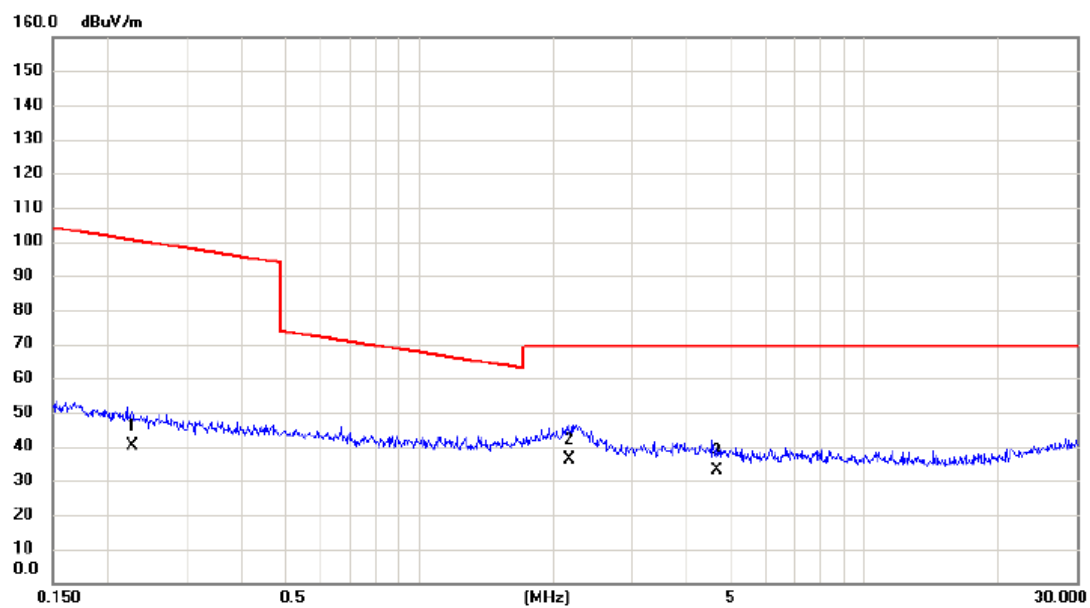

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2268	23.61	16.72	40.33	100.49	-60.16	AVG	
2	*	2.1783	20.82	15.46	36.28	69.54	-33.26	QP	
3		4.6715	18.29	14.56	32.85	69.54	-36.69	QP	

Test Mode: TX Mode _Adapter: Fuhua_External Antenna_1dBi


Ant 0°

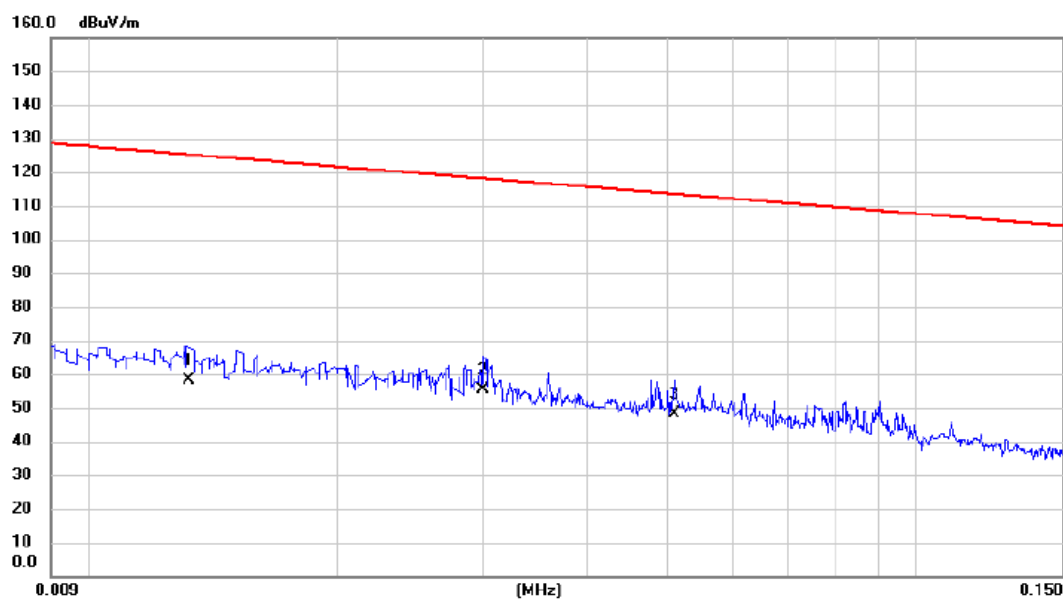

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.013	37.85	20.50	58.35	125.19	-66.84	AVG	
2	*	0.030	36.25	19.32	55.57	118.06	-62.49	AVG	
3		0.051	29.58	18.70	48.28	113.45	-65.17	AVG	

Test Mode: TX Mode_Adapter: Fuhua_External Antenna_1dBi


Ant 0°

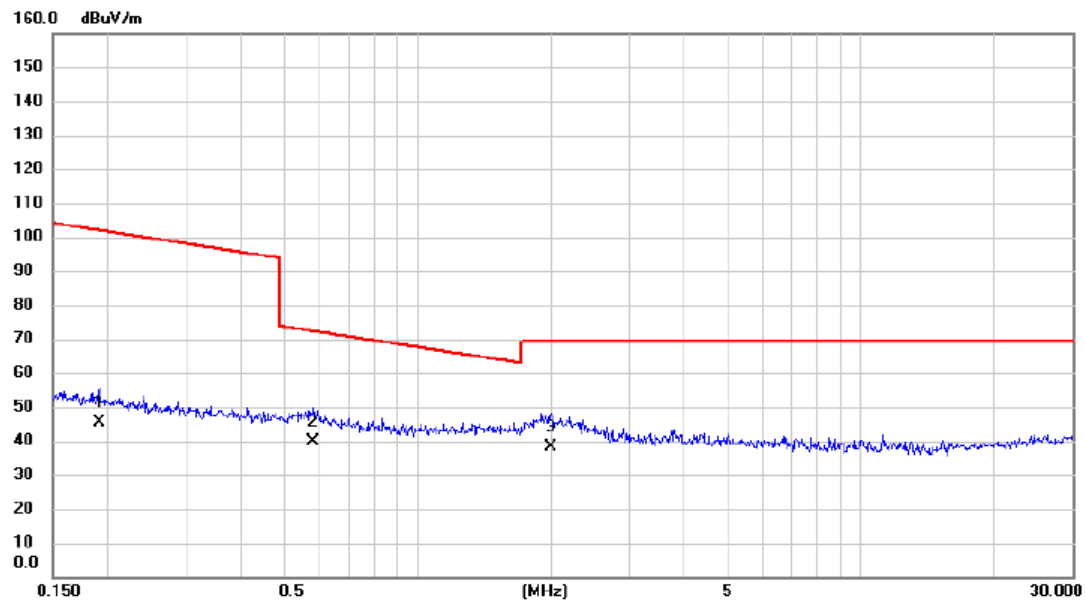

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.191	28.38	16.83	45.21	101.98	-56.77	AVG	
2		0.582	23.24	16.37	39.61	72.30	-32.69	QP	
3	*	2.001	22.70	15.51	38.21	69.54	-31.33	QP	

Test Mode: TX Mode _Adapter: Fuhua_External Antenna_1dBi


Ant 90°

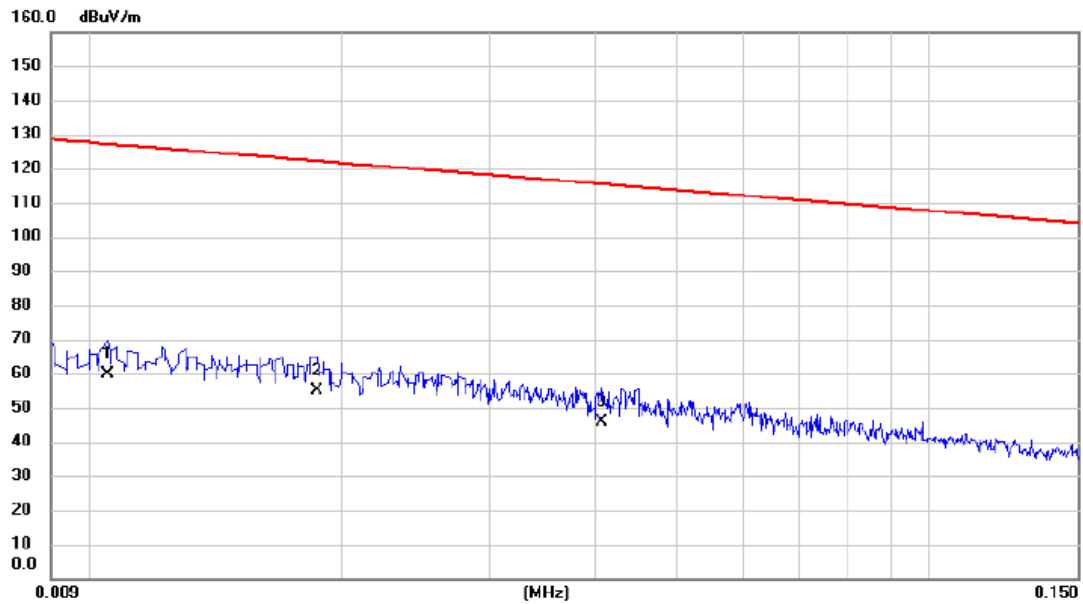

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.011	38.86	20.85	59.71	127.18	-67.47	AVG	
2	*	0.019	35.38	19.79	55.17	122.17	-67.00	AVG	
3		0.041	26.67	19.00	45.67	115.39	-69.72	AVG	

Test Mode: TX Mode_Adapter: Fuhua_External Antenna_1dBi


Ant 90°

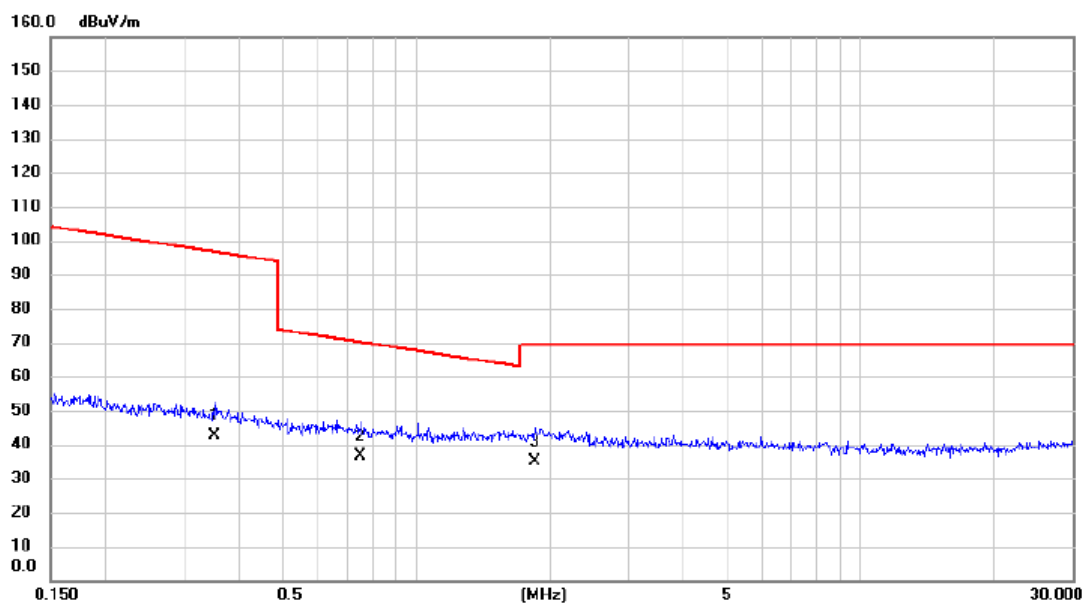

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.352	26.04	16.58	42.62	96.67	-54.05	AVG	
2	*	0.747	20.47	16.18	36.65	70.14	-33.49	QP	
3		1.848	19.26	15.57	34.83	69.54	-34.71	QP	

Test Mode: TX Mode _Adapter: Kuantech_External Antenna_1dBi


Ant 0°

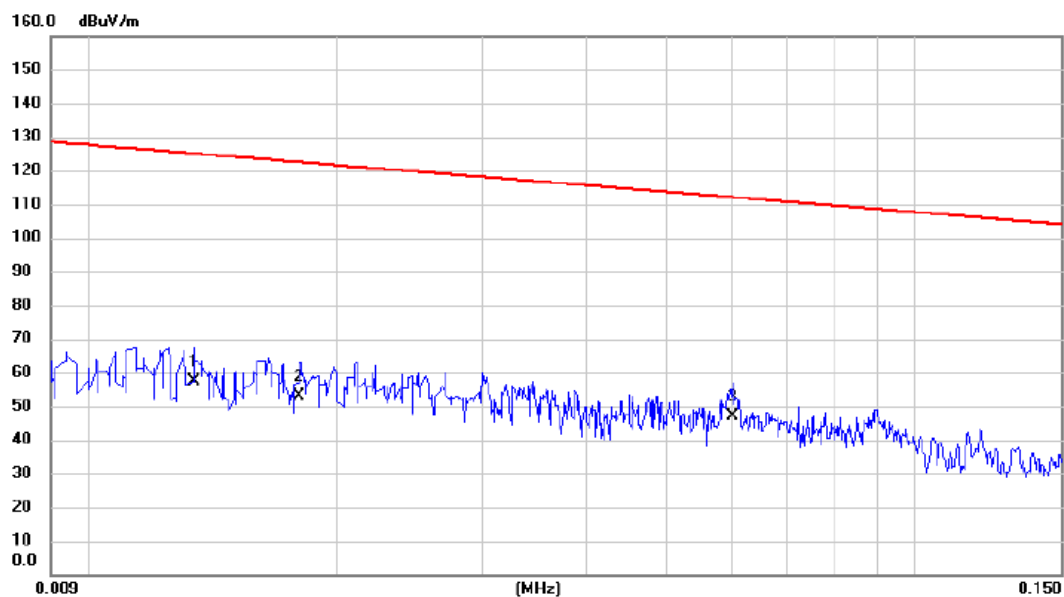

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.013	37.01	20.48	57.49	125.06	-67.57	AVG	
2		0.018	33.16	19.88	53.04	122.50	-69.46	AVG	
3	*	0.060	28.65	18.53	47.18	112.03	-64.85	AVG	

Test Mode: TX Mode _Adapter: Kuantech_External Antenna_1dBi


Ant 0°

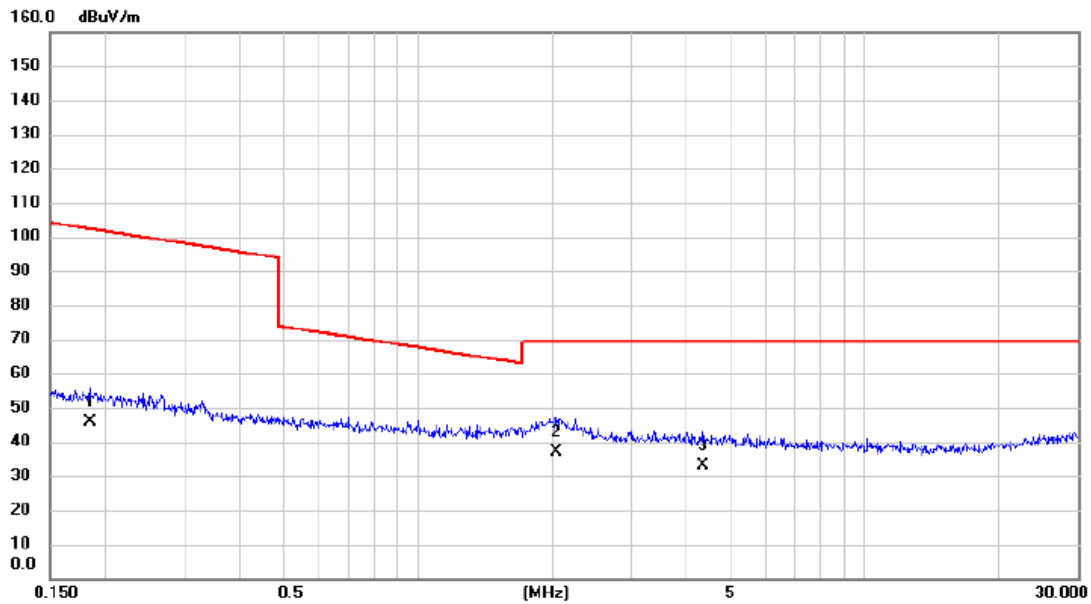

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.184	28.98	16.85	45.83	102.29	-56.46	AVG	
2 *	2.044	21.51	15.50	37.01	69.54	-32.53	QP	
3	4.338	18.10	14.76	32.86	69.54	-36.68	QP	

Test Mode: TX Mode _Adapter: Kuantech_External Antenna_1dBi


Ant 90°

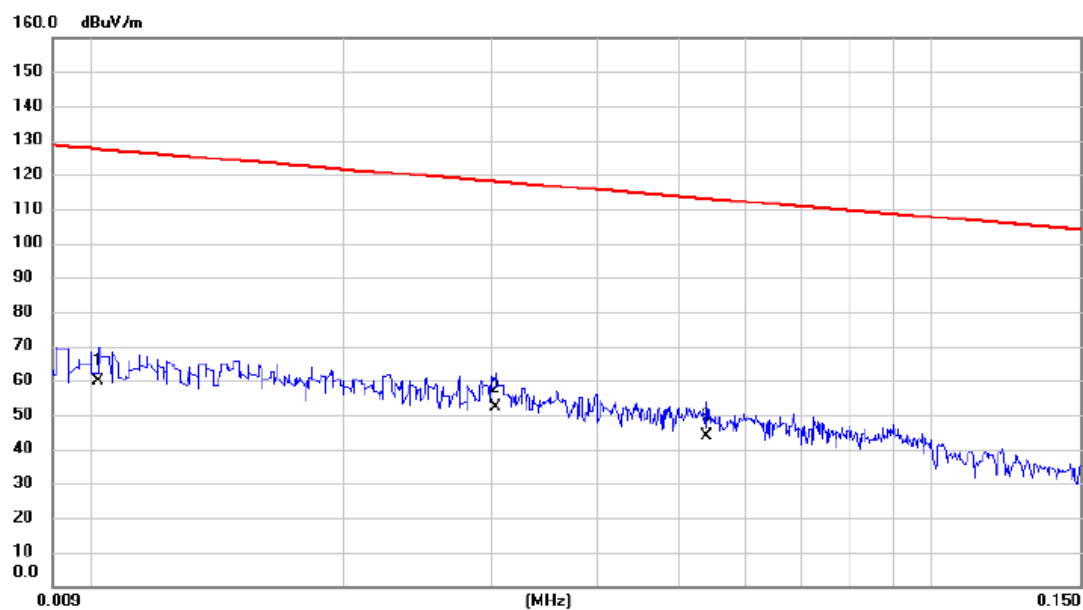

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.010	38.72	20.89	59.61	127.43	-67.82	AVG	
2	*	0.030	32.95	19.31	52.26	117.98	-65.72	AVG	
3		0.054	25.27	18.64	43.91	112.96	-69.05	AVG	

Test Mode: TX Mode _Adapter: Kuantech_External Antenna_1dBi


Ant 90°

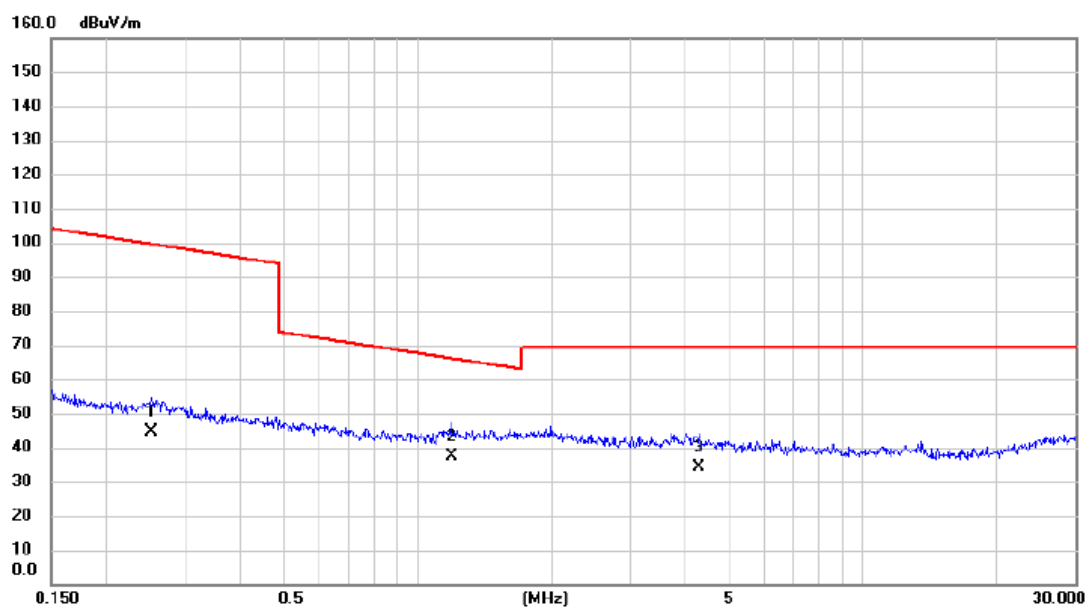

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.252	27.76	16.66	44.42	99.58	-55.16	AVG	
2	*	1.191	21.56	15.81	37.37	66.09	-28.72	QP	
3		4.292	19.54	14.78	34.32	69.54	-35.22	QP	

Test Mode: TX Mode _Adapter: HONOR_External Antenna_1dBi


Ant 0°

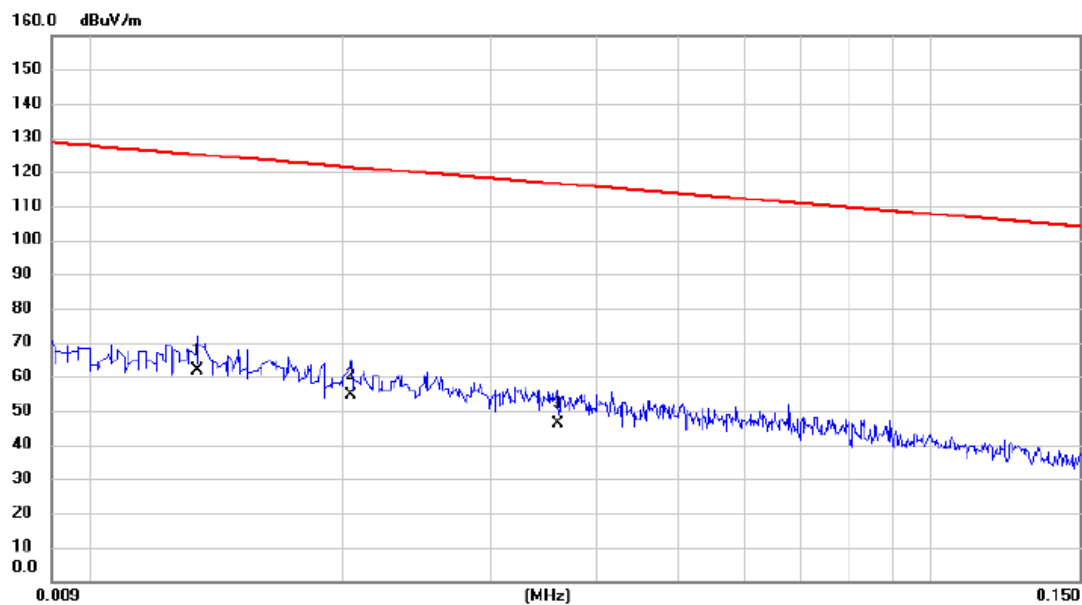

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.013	41.17	20.48	61.65	125.06	-63.41	AVG	
2		0.020	35.06	19.61	54.67	121.41	-66.74	AVG	
3		0.036	27.24	19.14	46.38	116.48	-70.10	AVG	

Test Mode: TX Mode_Adapter: HONOR_External Antenna_1dBi


Ant 0°

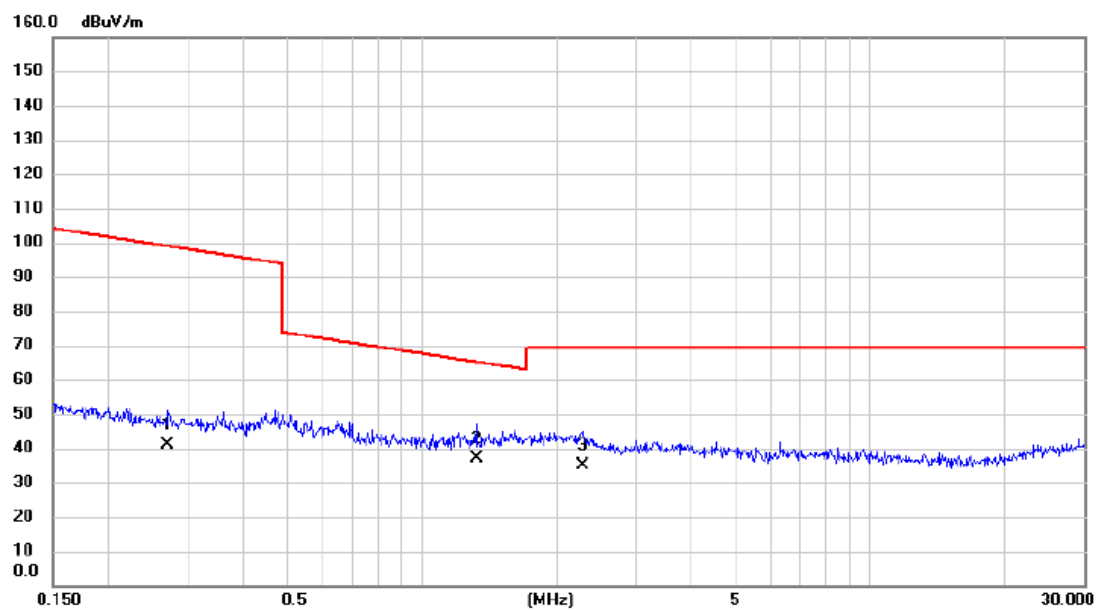

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.271	24.40	16.64	41.04	98.93	-57.89	AVG	
2	*	1.324	21.18	15.77	36.95	65.17	-28.22	QP	
3		2.284	19.54	15.43	34.97	69.54	-34.57	QP	

Test Mode: TX Mode _Adapter: HONOR_External Antenna_1dBi


Ant 90°

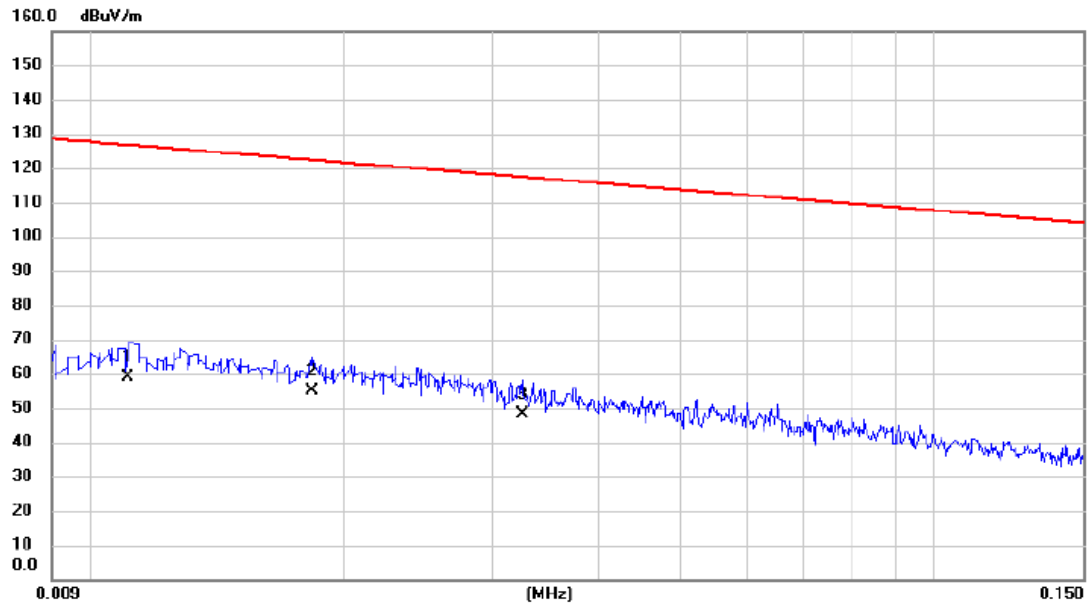

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.011	38.18	20.78	58.96	126.70	-67.74	AVG	
2	*	0.018	35.33	19.84	55.17	122.36	-67.19	AVG	
3		0.033	29.00	19.25	48.25	117.37	-69.12	AVG	

Test Mode: TX Mode_Adapter: HONOR_External Antenna_1dBi


Ant 90°

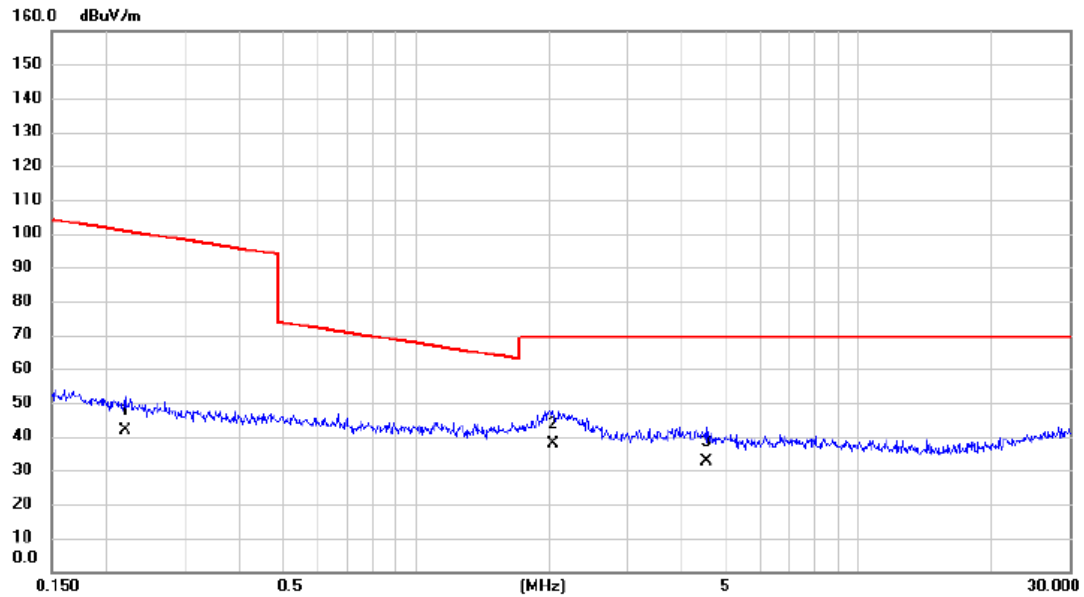

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.220	25.22	16.74	41.96	100.77	-58.81	AVG	
2	*	2.044	22.42	15.50	37.92	69.54	-31.62	QP	
3		4.549	18.16	14.63	32.79	69.54	-36.75	QP	

Test Mode: TX Mode _Adapter: Fuhua_External Antenna_3dBi


Ant 0°

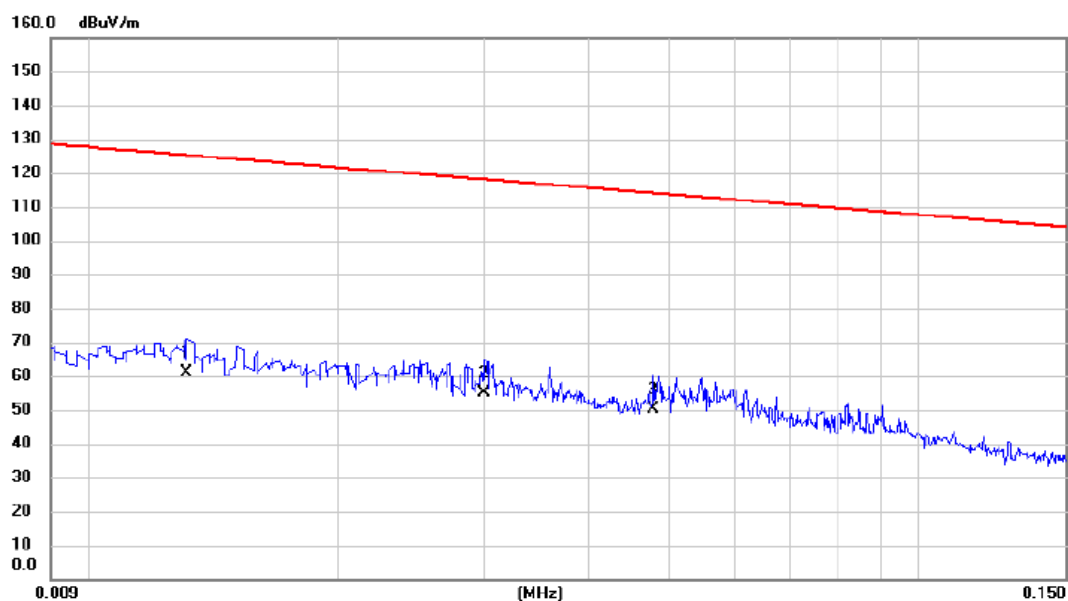

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.013	40.33	20.52	60.85	125.26	-64.41	AVG	
2	*	0.030	35.62	19.32	54.94	118.06	-63.12	AVG	
3		0.048	31.30	18.79	50.09	114.02	-63.93	AVG	

Test Mode: TX Mode_Adapter: Fuhua_External Antenna_3dBi


Ant 0°

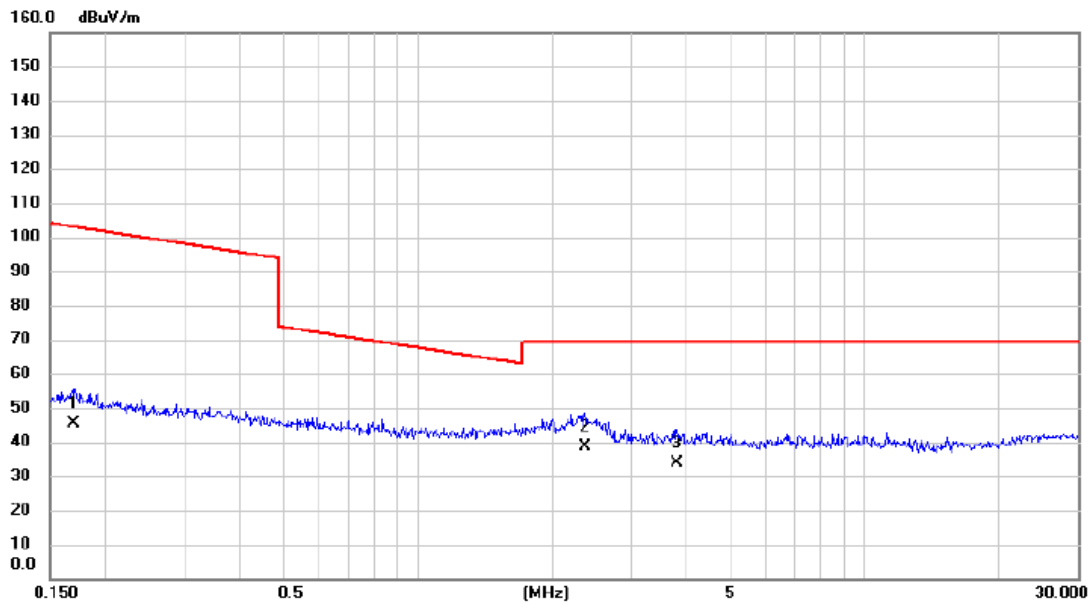

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.170	28.41	16.89	45.30	102.98	-57.68	AVG	
2	*	2.371	23.14	15.41	38.55	69.54	-30.99	QP	
3		3.799	18.86	15.01	33.87	69.54	-35.67	QP	

Test Mode: TX Mode _Adapter: Fuhua_External Antenna_3dBi


Ant 90°

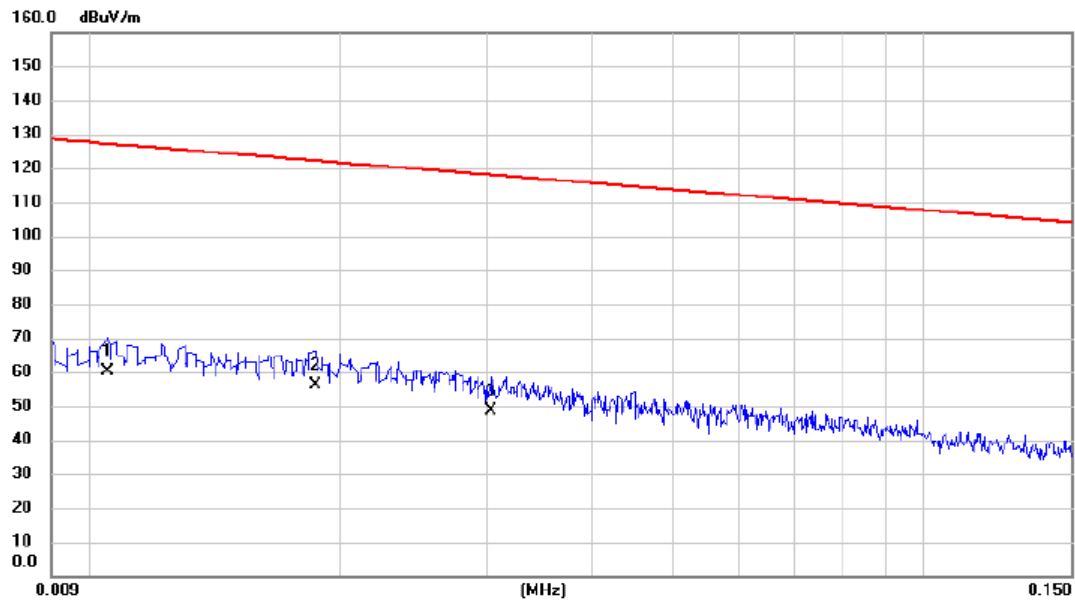

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.011	39.36	20.85	60.21	127.18	-66.97	AVG	
2	*	0.019	36.38	19.79	56.17	122.17	-66.00	AVG	
3		0.030	29.48	19.31	48.79	117.98	-69.19	AVG	

Test Mode: TX Mode_Adapter: Fuhua_External Antenna_3dBi


Ant 90°

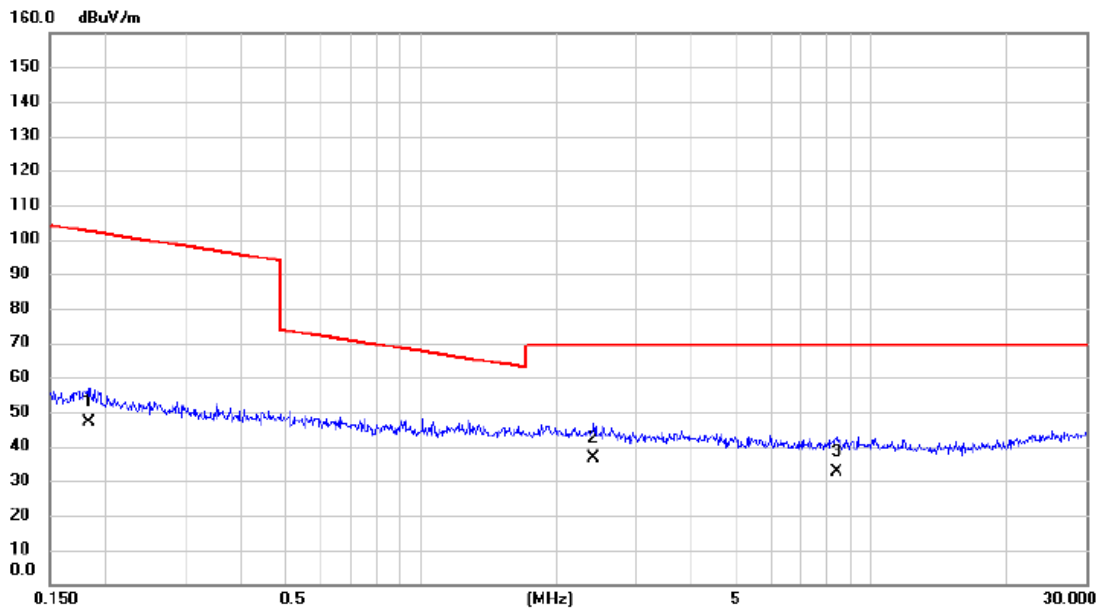

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.183	30.31	16.85	47.16	102.34	-55.18	AVG	
2	*	2.422	21.10	15.39	36.49	69.54	-33.05	QP	
3		8.412	18.53	13.94	32.47	69.54	-37.07	QP	

Test Mode: TX Mode _Adapter: Kuantech_External Antenna_3dBi


Ant 0°

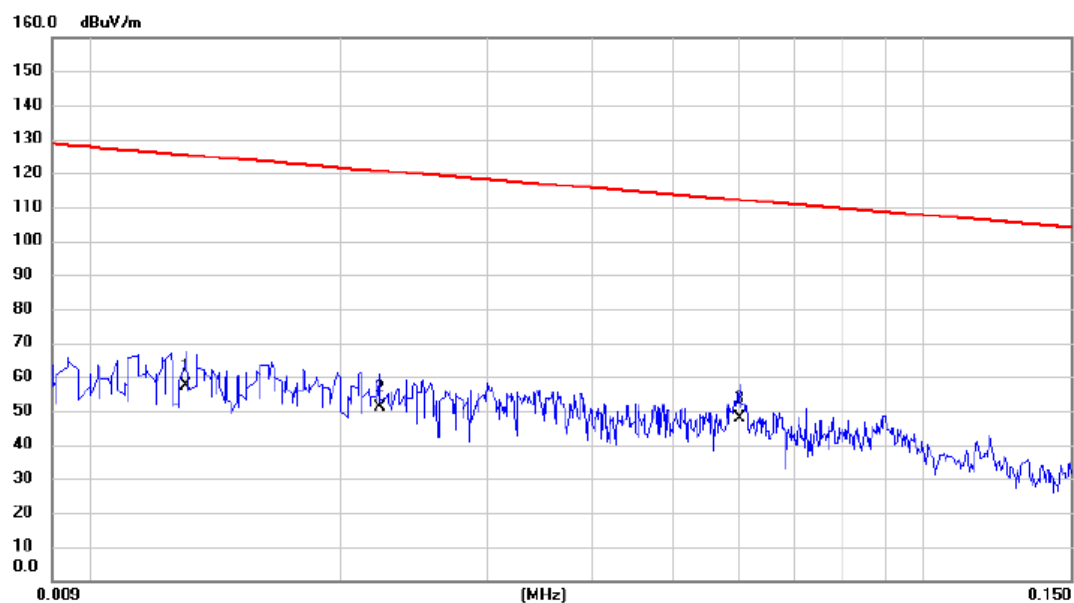

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.013	36.68	20.53	57.21	125.33	-68.12	AVG	
2		0.022	31.45	19.55	51.00	120.64	-69.64	AVG	
3	*	0.060	29.15	18.53	47.68	112.03	-64.35	AVG	

Test Mode: TX Mode_Adapter: Kuantech_External Antenna_3dBi


Ant 0°

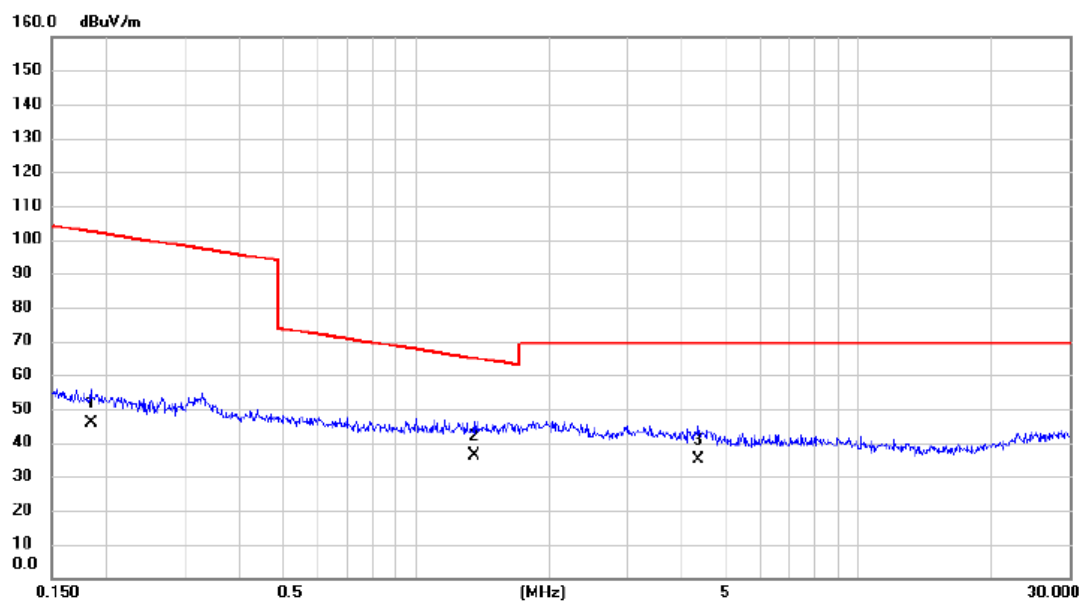

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.184	28.98	16.85	45.83	102.29	-56.46	AVG	
2 *	1.352	20.56	15.76	36.32	64.98	-28.66	QP	
3	4.338	20.10	14.76	34.86	69.54	-34.68	QP	

Test Mode: TX Mode _Adapter: Kuantech_External Antenna_3dBi


Ant 90°

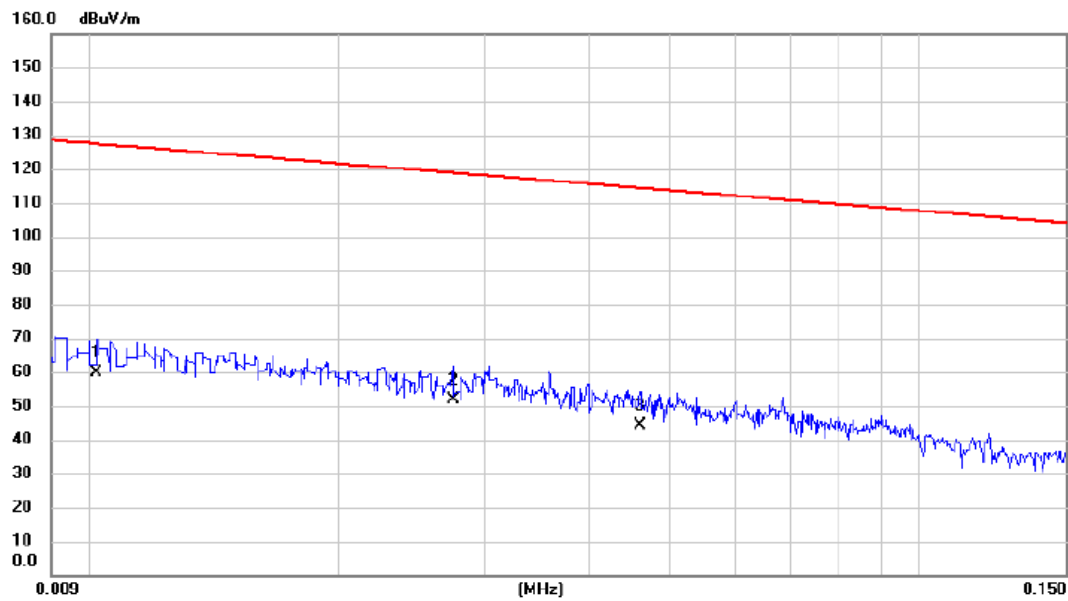

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.010	38.72	20.89	59.61	127.43	-67.82	AVG	
2	*	0.028	32.45	19.40	51.85	118.82	-66.97	AVG	
3		0.046	25.49	18.84	44.33	114.33	-70.00	AVG	

Test Mode: TX Mode_Adapter: Kuantech_External Antenna_3dBi


Ant 90°

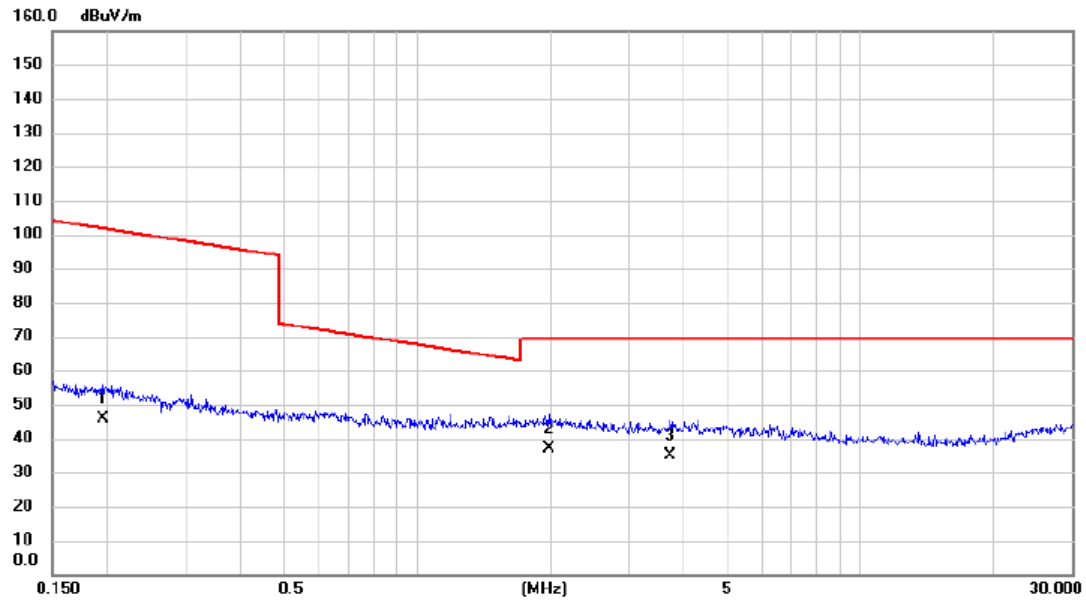

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.195	28.87	16.81	45.68	101.80	-56.12	AVG	
2	*	1.990	21.53	15.51	37.04	69.54	-32.50	QP	
3		3.720	20.18	15.02	35.20	69.54	-34.34	QP	

Test Mode: TX Mode_Adapter: HONOR_External Antenna_3dBi


Ant 0°

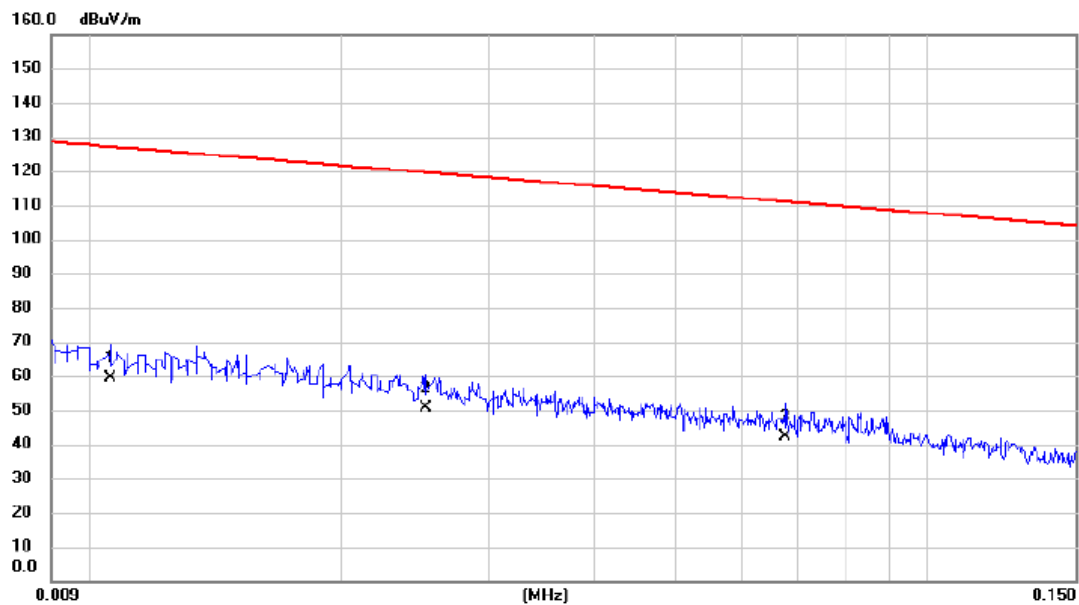

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.011	38.41	20.84	59.25	127.10	-67.85	AVG	
2		0.025	31.24	19.46	50.70	119.58	-68.88	AVG	
3		0.068	23.77	18.38	42.15	111.01	-68.86	AVG	

Test Mode: TX Mode _Adapter: HONOR_External Antenna_3dBi


Ant 0°

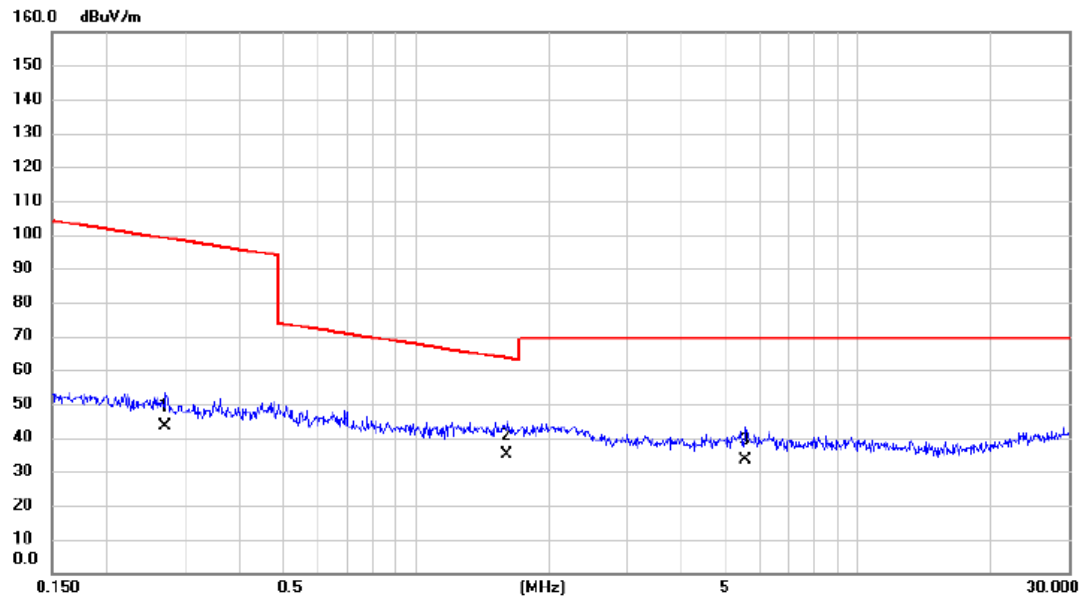

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.271	26.90	16.64	43.54	98.93	-55.39	AVG	
2	*	1.610	19.39	15.66	35.05	63.47	-28.42	QP	
3		5.564	19.25	14.30	33.55	69.54	-35.99	QP	

Test Mode: TX Mode _Adapter: HONOR_External Antenna_3dBi


Ant 90°

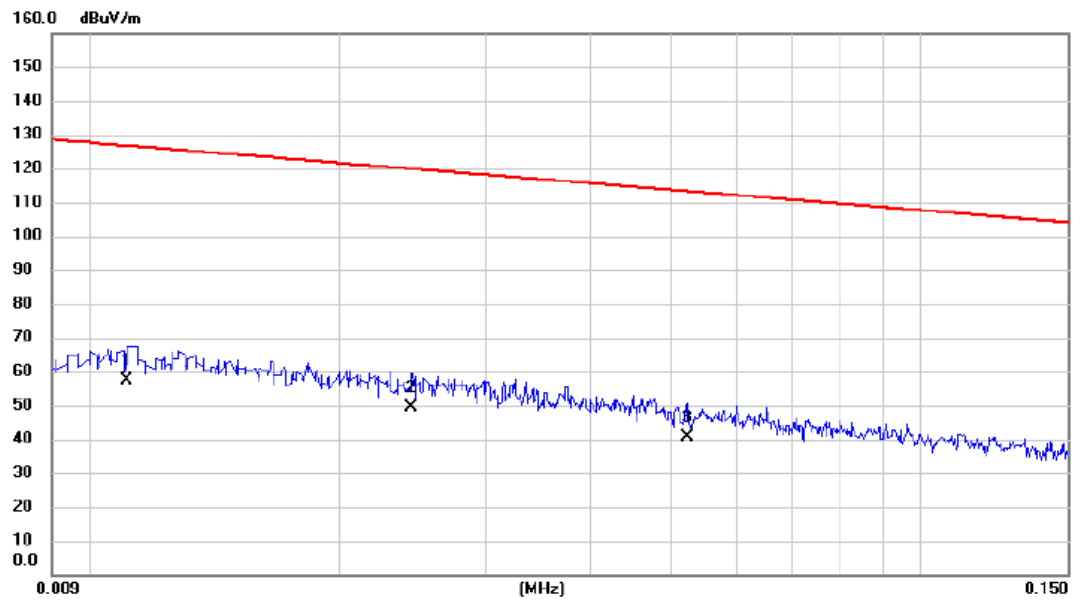

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.011	36.68	20.78	57.46	126.70	-69.24	AVG	
2		0.024	29.73	19.49	49.22	119.86	-70.64	AVG	
3		0.052	21.97	18.67	40.64	113.22	-72.58	AVG	

Test Mode: TX Mode_Adapter: HONOR_External Antenna_3dBi

Ant 90°

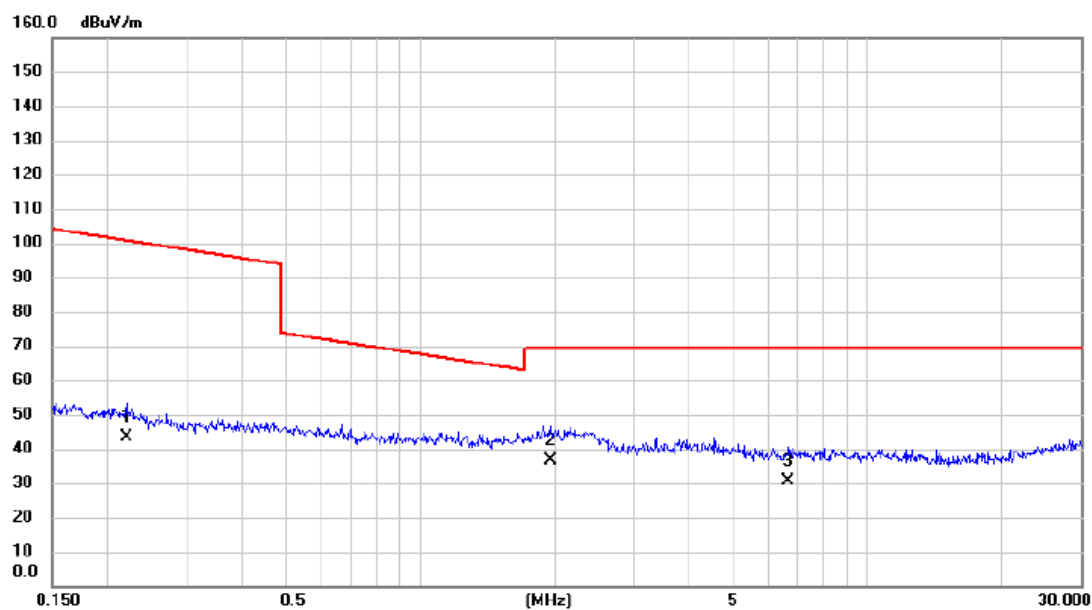


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.220	26.72	16.74	43.46	100.77	-57.31	AVG	
2	*	1.949	21.19	15.53	36.72	69.54	-32.82	QP	
3		6.662	16.60	14.17	30.77	69.54	-38.77	QP	

APPENDIX E - RADIATED EMISSION (30MHZ TO 1GHZ)


Test Mode: LTE Band 38_TX CH38225_5M_Internal Antenna

Vertical

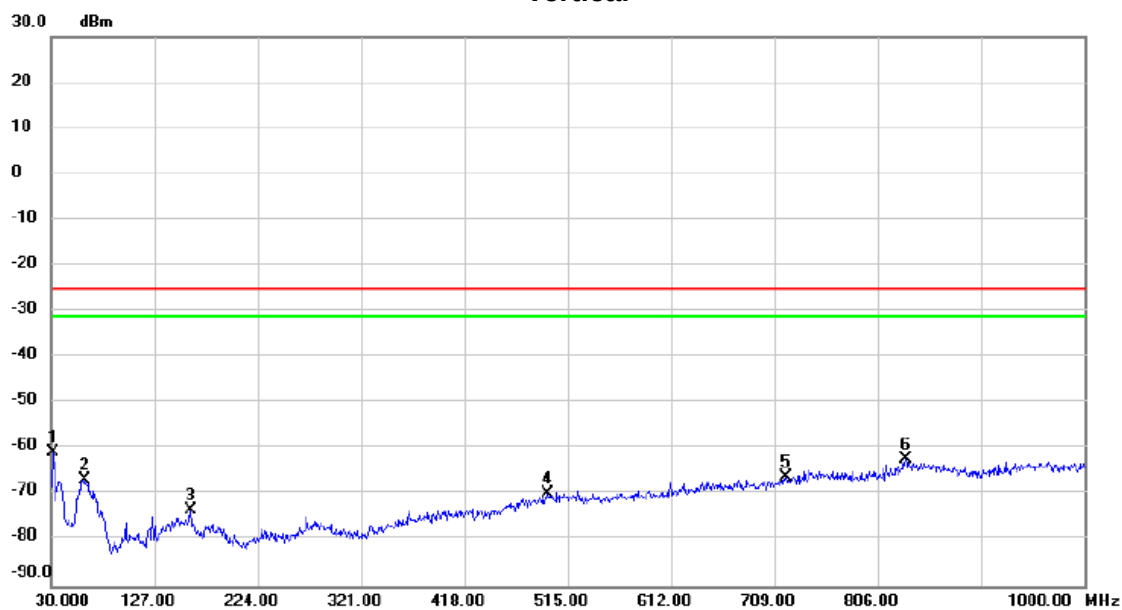

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	31.940	-60.09	-0.73	-60.82	-25.00	-35.82	peak	
2		62.010	-67.51	0.73	-66.78	-25.00	-41.78	peak	
3		160.950	-76.15	2.87	-73.28	-25.00	-48.28	peak	
4		496.570	-77.24	7.35	-69.89	-25.00	-44.89	peak	
5		719.670	-77.40	11.27	-66.13	-25.00	-41.13	peak	
6		832.190	-75.93	13.55	-62.38	-25.00	-37.38	peak	


Test Mode: LTE Band 38_TX CH38225_5M_Internal Antenna

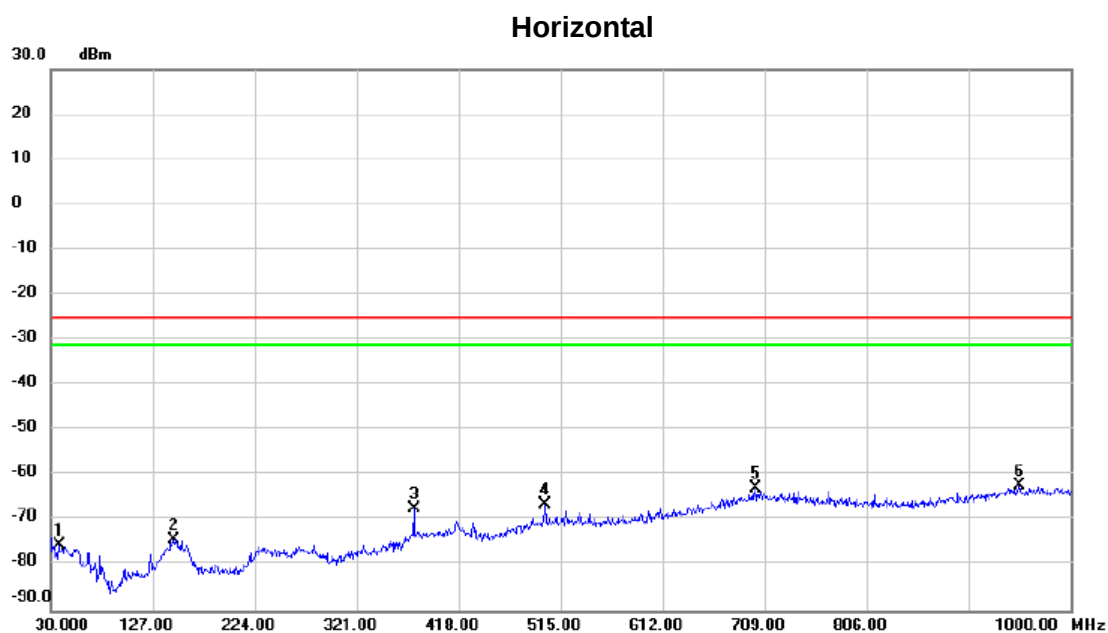

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		37.760	-76.61	1.28	-75.33	-25.00	-50.33	peak	
2		146.400	-78.13	3.84	-74.29	-25.00	-49.29	peak	
3		375.320	-72.88	5.54	-67.34	-25.00	-42.34	peak	
4		500.450	-74.54	8.06	-66.48	-25.00	-41.48	peak	
5		700.270	-76.75	13.97	-62.78	-25.00	-37.78	peak	
6	*	951.500	-77.19	14.95	-62.24	-25.00	-37.24	peak	

Test Mode: LTE Band 38_TX CH38150_20M_Internal Antenna

Vertical

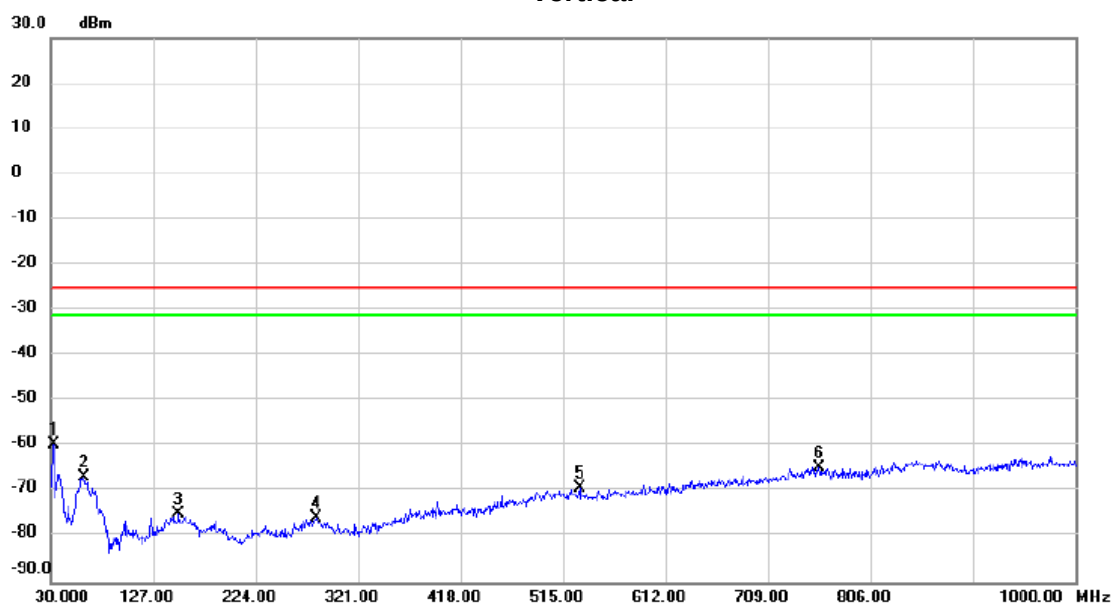

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	32.910	-58.47	-0.96	-59.43	-25.00	-34.43	peak	
2		61.040	-67.29	0.60	-66.69	-25.00	-41.69	peak	
3		151.250	-78.10	3.15	-74.95	-25.00	-49.95	peak	
4		281.230	-78.34	2.60	-75.74	-25.00	-50.74	peak	
5		530.520	-76.70	7.49	-69.21	-25.00	-44.21	peak	
6		757.500	-76.92	12.39	-64.53	-25.00	-39.53	peak	

Test Mode: LTE Band 38_TX CH38150_20M_Internal Antenna


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		32.910	-73.13	0.96	-72.17	-25.00	-47.17	peak	
2		147.370	-77.74	3.95	-73.79	-25.00	-48.79	peak	
3		232.730	-77.82	3.02	-74.80	-25.00	-49.80	peak	
4		375.320	-72.72	5.54	-67.18	-25.00	-42.18	peak	
5		500.450	-75.54	8.06	-67.48	-25.00	-42.48	peak	
6	*	729.370	-76.59	13.27	-63.32	-25.00	-38.32	peak	

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_1dBi


Vertical

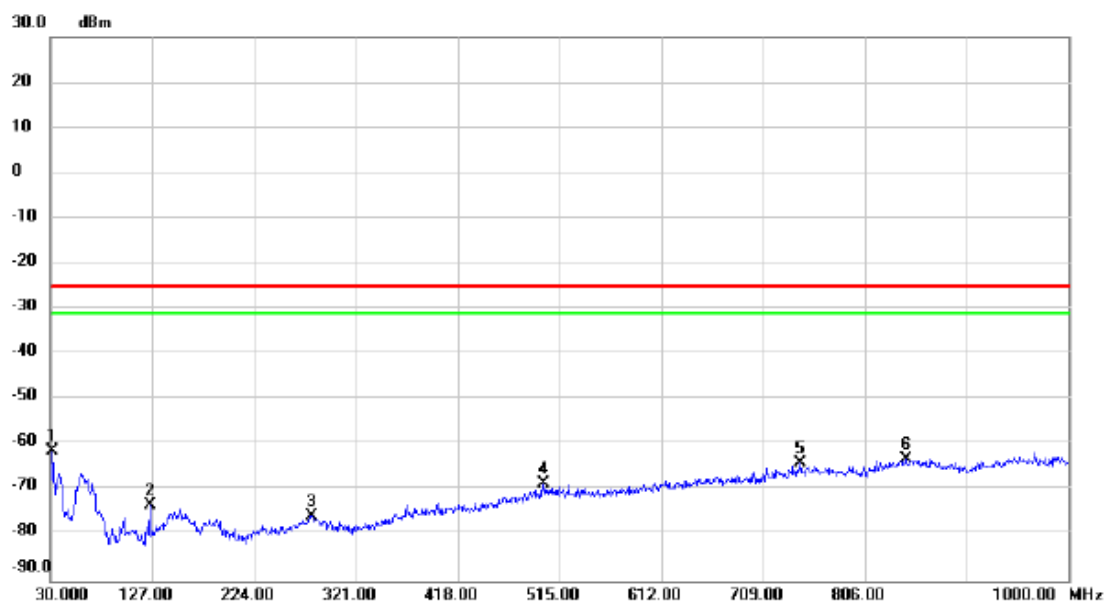

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	31.940	-60.47	-0.73	-61.20	-25.00	-36.20	peak	
2		125.060	-71.90	-1.55	-73.45	-25.00	-48.45	peak	
3		279.290	-78.35	2.62	-75.73	-25.00	-50.73	peak	
4		500.450	-76.16	7.55	-68.61	-25.00	-43.61	peak	
5		744.890	-76.22	12.28	-63.94	-25.00	-38.94	peak	
6		844.800	-77.40	14.21	-63.19	-25.00	-38.19	peak	

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_1dBi


Horizontal

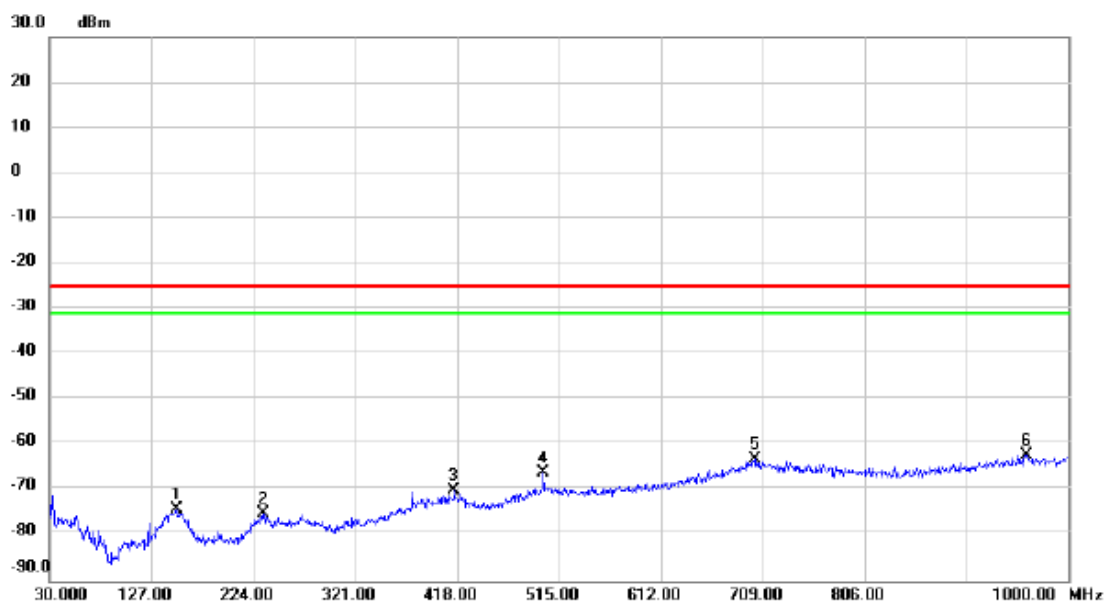

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		150.280	-78.39	4.20	-74.19	-25.00	-49.19	peak	
2		233.700	-78.15	2.94	-75.21	-25.00	-50.21	peak	
3		415.090	-76.67	6.63	-70.04	-25.00	-45.04	peak	
4		500.450	-74.33	8.06	-66.27	-25.00	-41.27	peak	
5		701.240	-77.25	13.95	-63.30	-25.00	-38.30	peak	
6	*	960.230	-77.14	14.94	-62.20	-25.00	-37.20	peak	

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_3dBi


Vertical

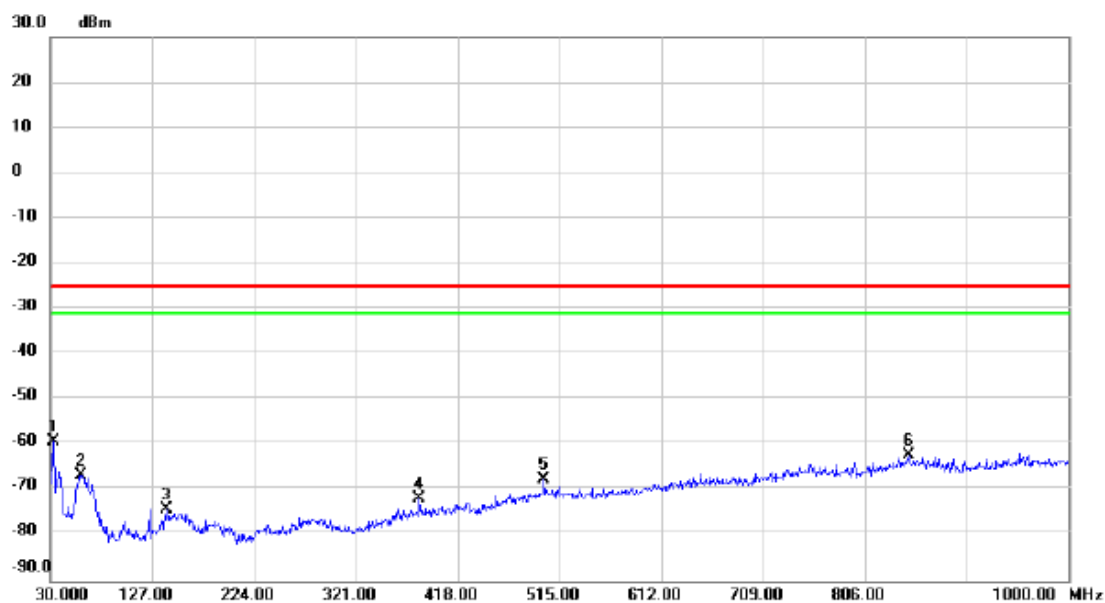

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	32.910	-58.17	-0.96	-59.13	-25.00	-34.13	peak	
2		59.100	-67.50	0.87	-66.63	-25.00	-41.63	peak	
3		140.580	-76.35	2.21	-74.14	-25.00	-49.14	peak	
4		381.140	-75.76	3.85	-71.91	-25.00	-46.91	peak	
5		500.450	-75.09	7.55	-67.54	-25.00	-42.54	peak	
6		847.710	-76.67	14.36	-62.31	-25.00	-37.31	peak	

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_3dBi


Horizontal

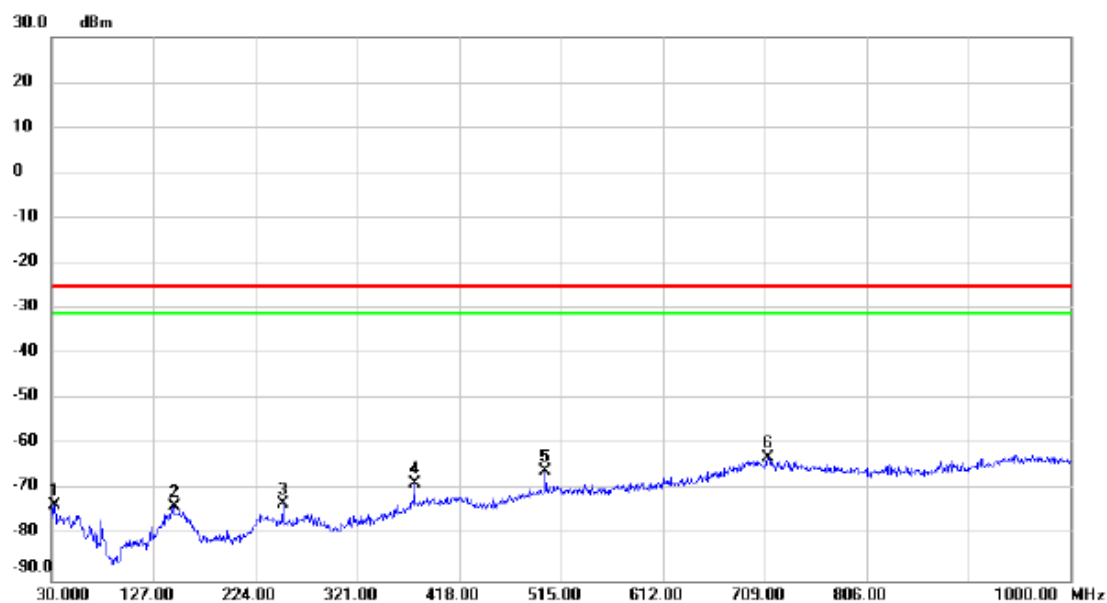

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		32.910	-74.38	0.96	-73.42	-25.00	-48.42	peak	
2		146.400	-77.45	3.84	-73.61	-25.00	-48.61	peak	
3		250.190	-74.82	1.87	-72.95	-25.00	-47.95	peak	
4		375.320	-74.10	5.54	-68.56	-25.00	-43.56	peak	
5		500.450	-74.00	8.06	-65.94	-25.00	-40.94	peak	
6	*	711.910	-76.56	13.69	-62.87	-25.00	-37.87	peak	

Test Mode: LTE Band 38_TX CH38150_20M_External Antenna_1dBi

Vertical

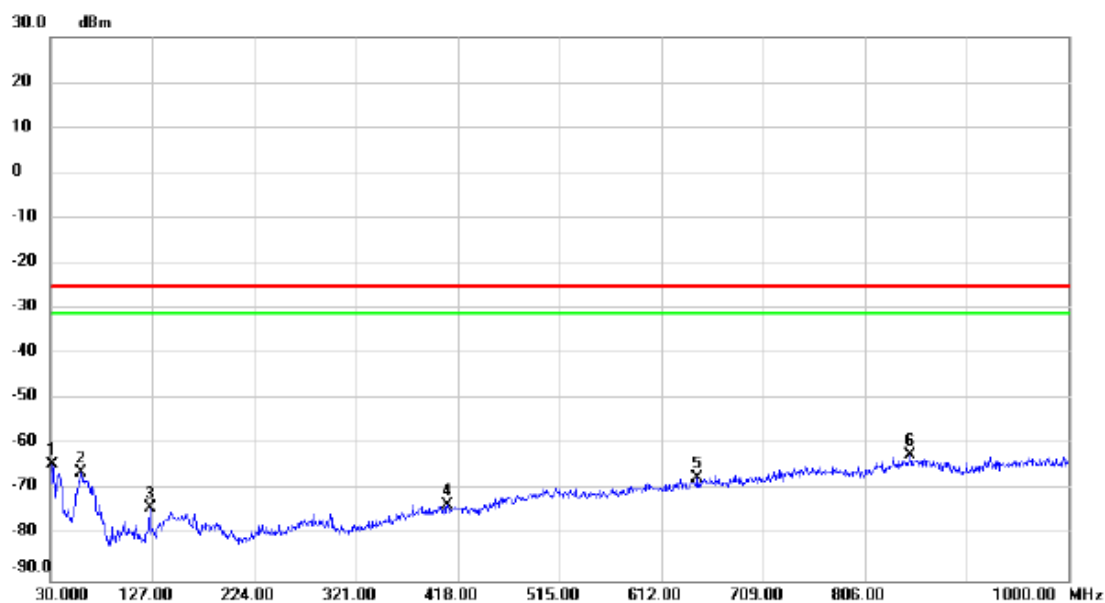

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		31.940	-63.47	-0.73	-64.20	-25.00	-39.20	peak	
2		59.100	-67.15	0.87	-66.28	-25.00	-41.28	peak	
3		125.060	-72.26	-1.55	-73.81	-25.00	-48.81	peak	
4		408.300	-77.56	4.33	-73.23	-25.00	-48.23	peak	
5		646.920	-77.28	10.03	-67.25	-25.00	-42.25	peak	
6	*	849.650	-76.80	14.46	-62.34	-25.00	-37.34	peak	

Test Mode: LTE Band 38_TX CH38150_20M_External Antenna_1dBi


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		30.000	-76.03	1.88	-74.15	-25.00	-49.15	peak	
2		144.460	-76.75	3.63	-73.12	-25.00	-48.12	peak	
3		229.820	-77.73	3.20	-74.53	-25.00	-49.53	peak	
4		378.230	-76.53	5.89	-70.64	-25.00	-45.64	peak	
5		500.450	-74.33	8.06	-66.27	-25.00	-41.27	peak	
6	*	679.900	-76.31	12.61	-63.70	-25.00	-38.70	peak	

Test Mode: LTE Band 38_TX CH38150_20M_External Antenna_3dBi


Vertical

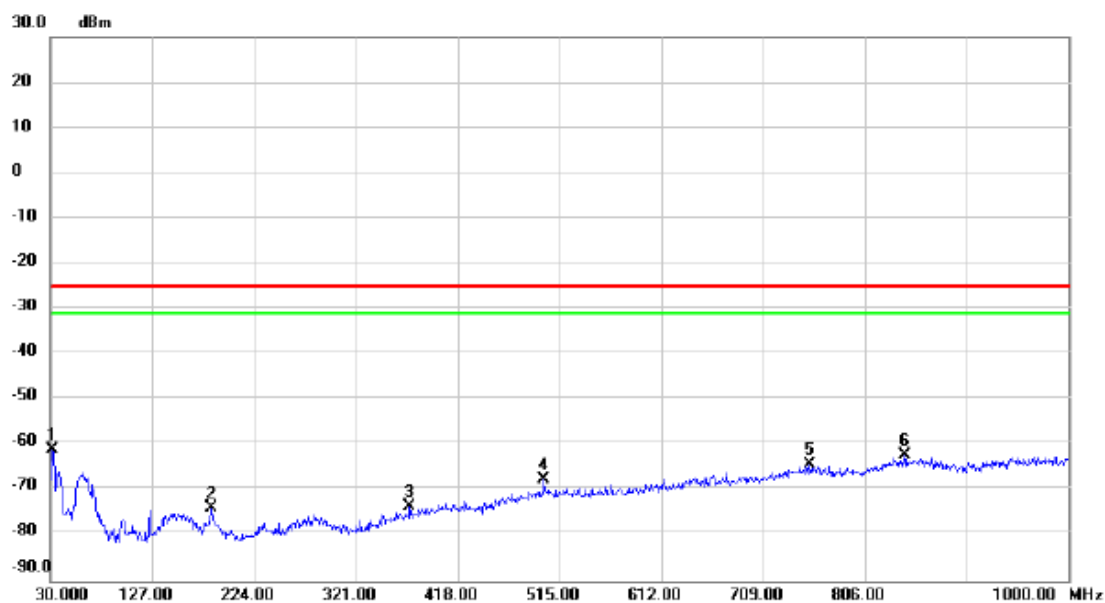

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	31.940	-60.44	-0.73	-61.17	-25.00	-36.17	peak	
2		183.260	-73.74	-0.07	-73.81	-25.00	-48.81	peak	
3		372.410	-77.01	3.45	-73.56	-25.00	-48.56	peak	
4		500.450	-75.31	7.55	-67.76	-25.00	-42.76	peak	
5		753.620	-76.88	12.44	-64.44	-25.00	-39.44	peak	
6		843.830	-76.43	14.16	-62.27	-25.00	-37.27	peak	

Test Mode: LTE Band 38_TX CH38150_20M_External Antenna_3dBi

Horizontal

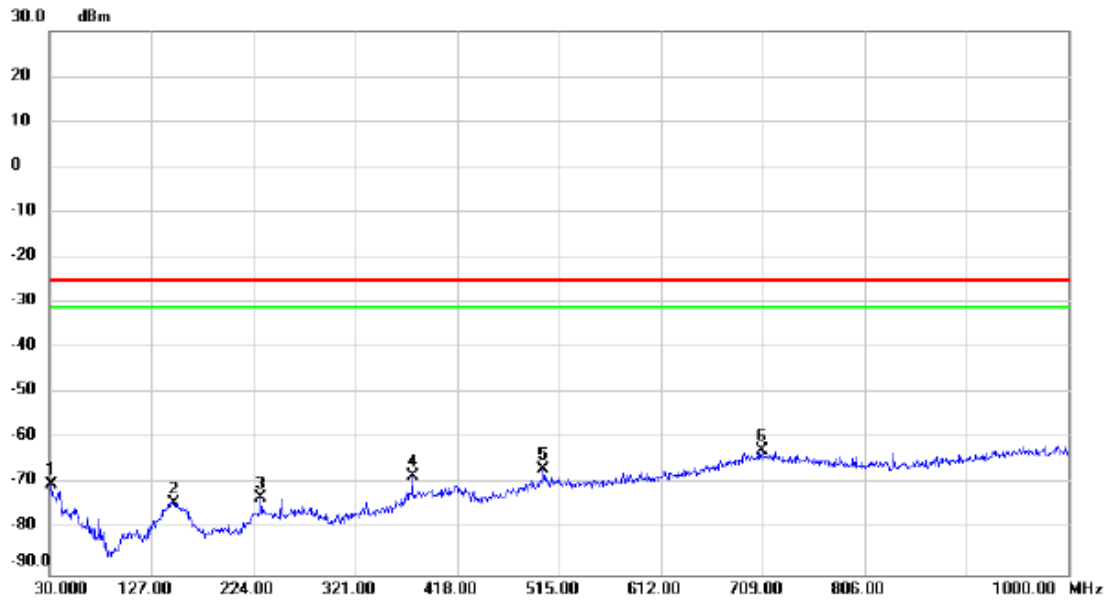


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		31.940	-71.27	1.27	-70.00	-25.00	-45.00	peak	
2		148.340	-78.17	4.06	-74.11	-25.00	-49.11	peak	
3		230.790	-76.21	3.18	-73.03	-25.00	-48.03	peak	
4		375.320	-73.82	5.54	-68.28	-25.00	-43.28	peak	
5		500.450	-74.75	8.06	-66.69	-25.00	-41.69	peak	
6	*	708.030	-76.45	13.79	-62.66	-25.00	-37.66	peak	

APPENDIX F - RADIATED EMISSION (ABOVE 1GHZ)


Test Mode: LTE Band 38_TX CH38225_5M_Internal Antenna

Vertical

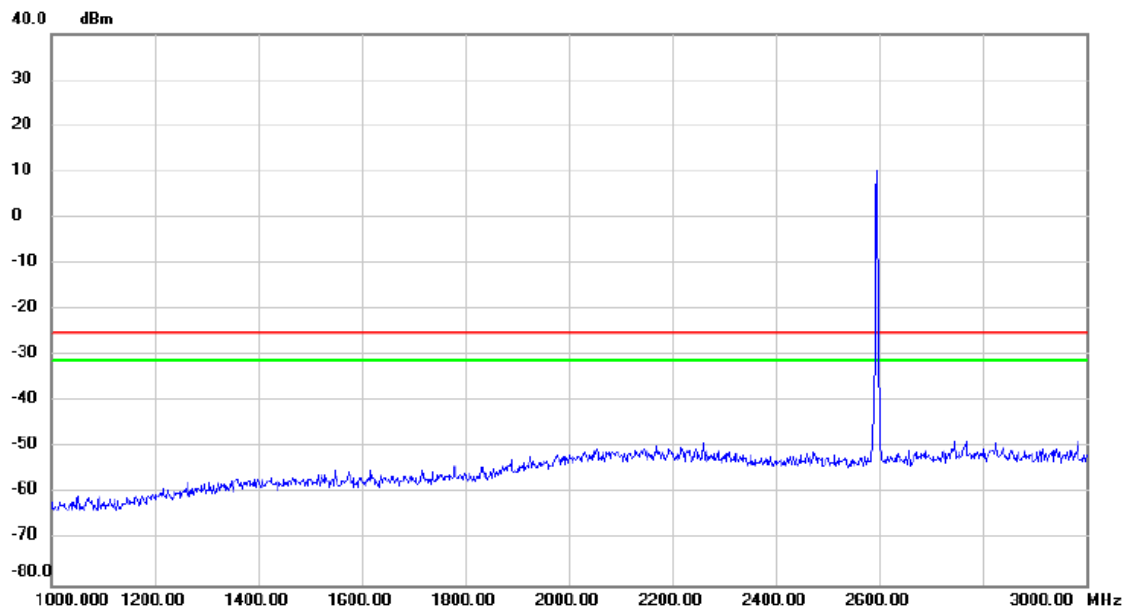


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38225_5M_Internal Antenna
------------	--

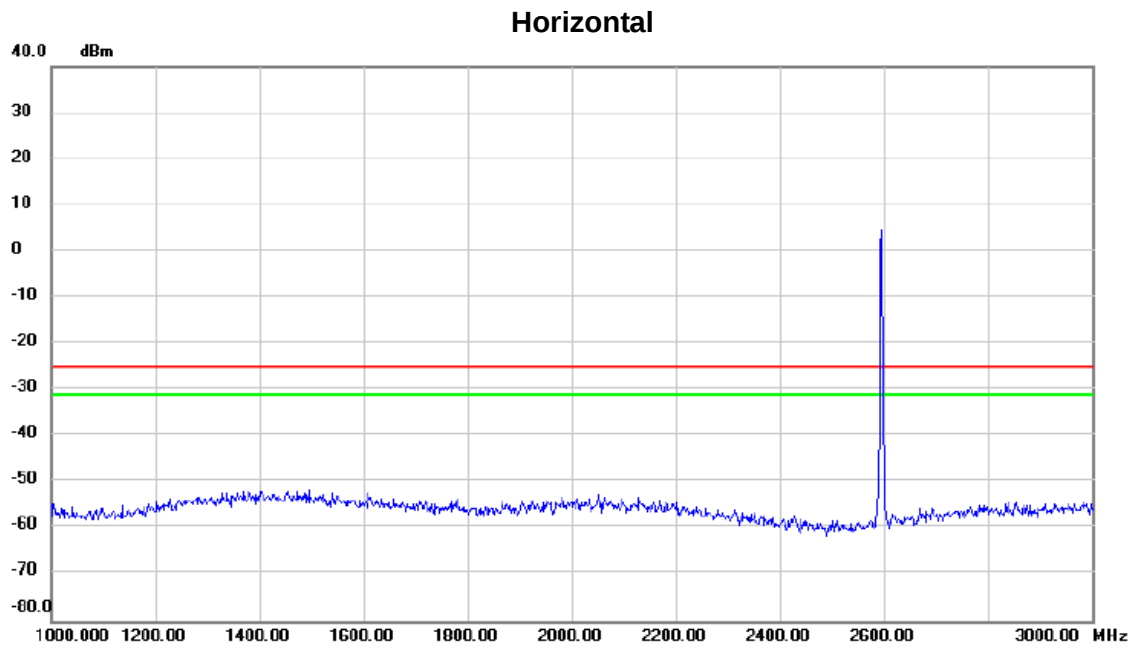


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: LTE Band 38_TX CH38225_5M_Internal Antenna

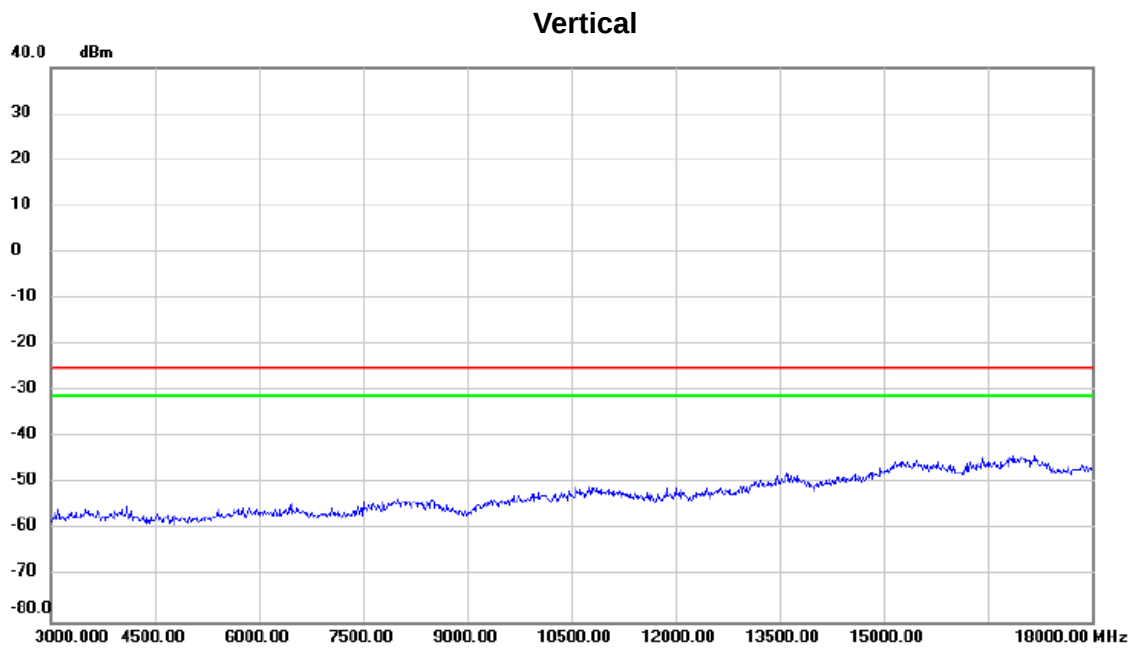


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode:	LTE Band 38_TX CH38225_5M_Internal Antenna
------------	--

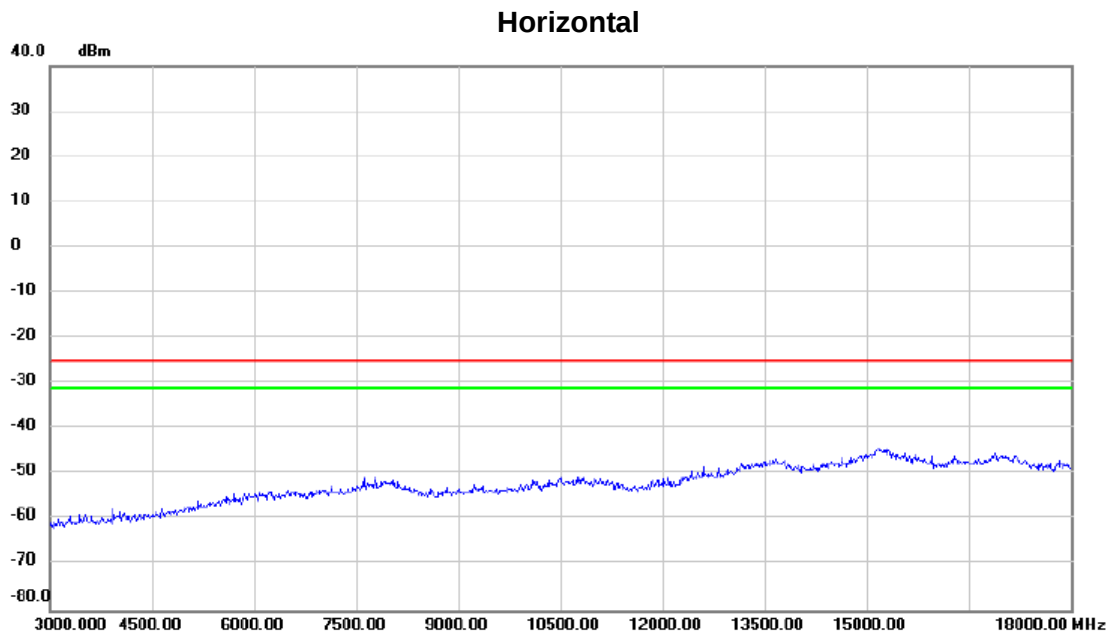


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: LTE Band 38_TX CH38225_5M_Internal Antenna

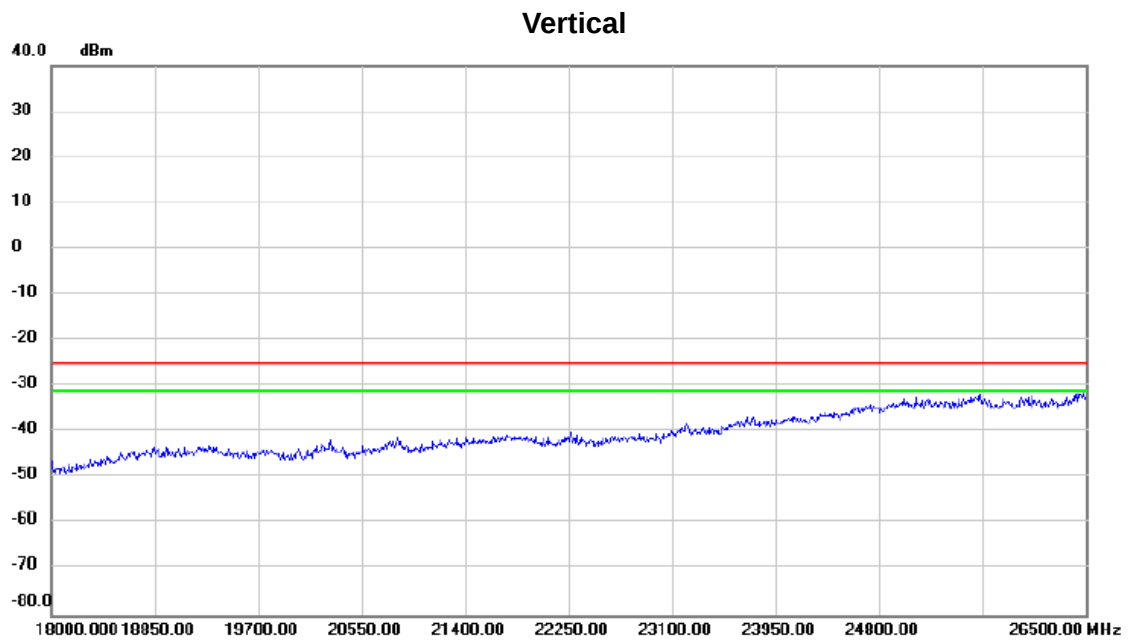


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38225_5M_Internal Antenna
------------	--

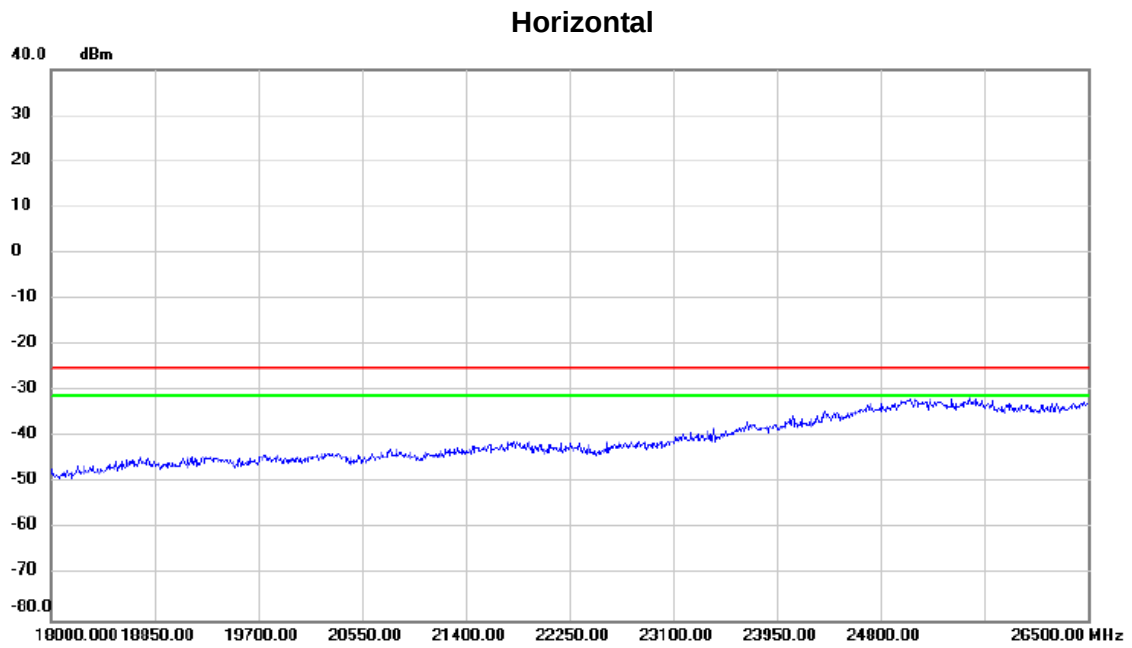

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment


Test Mode: LTE Band 38_TX CH38150_20M_Internal Antenna

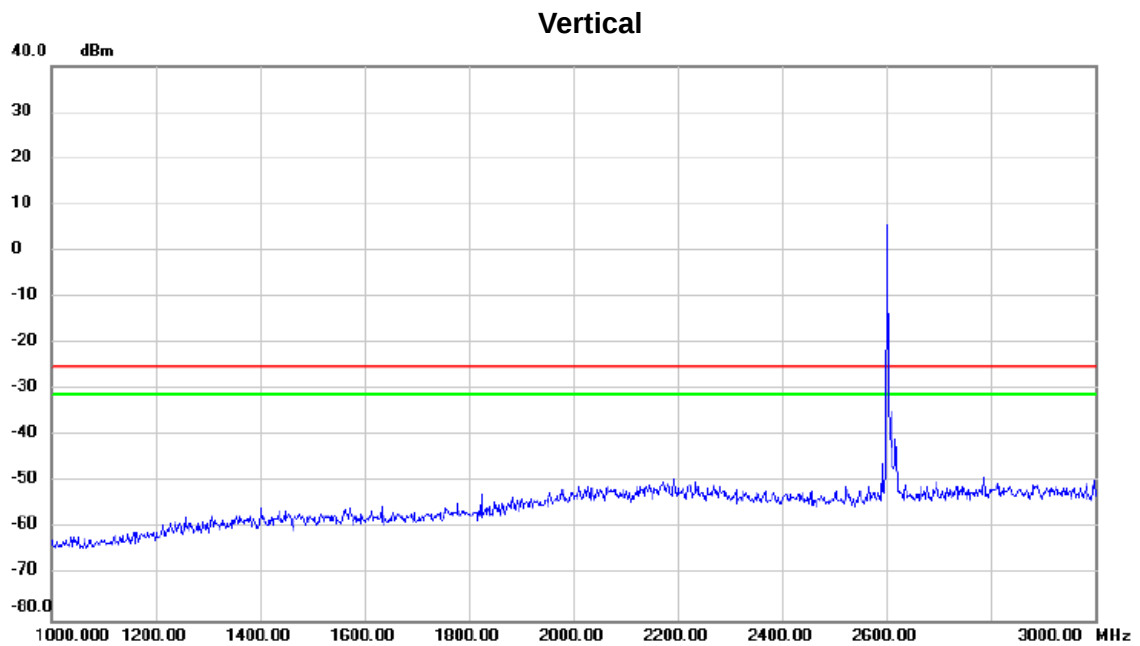

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment


Test Mode: LTE Band 38_TX CH38150_20M_Internal Antenna

Horizontal

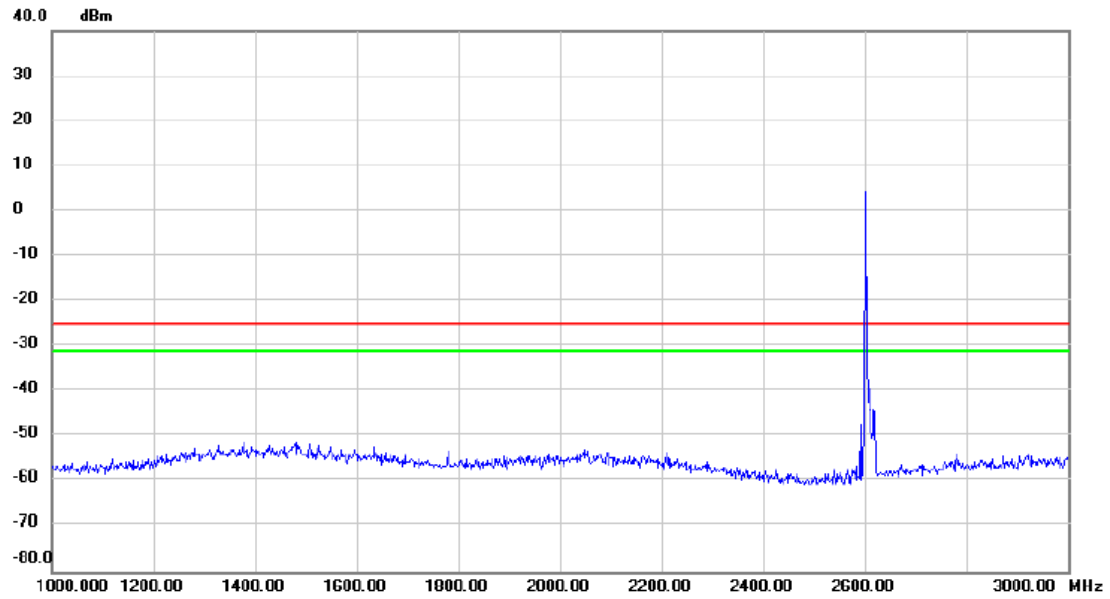


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: LTE Band 38_TX CH38150_20M_Internal Antenna

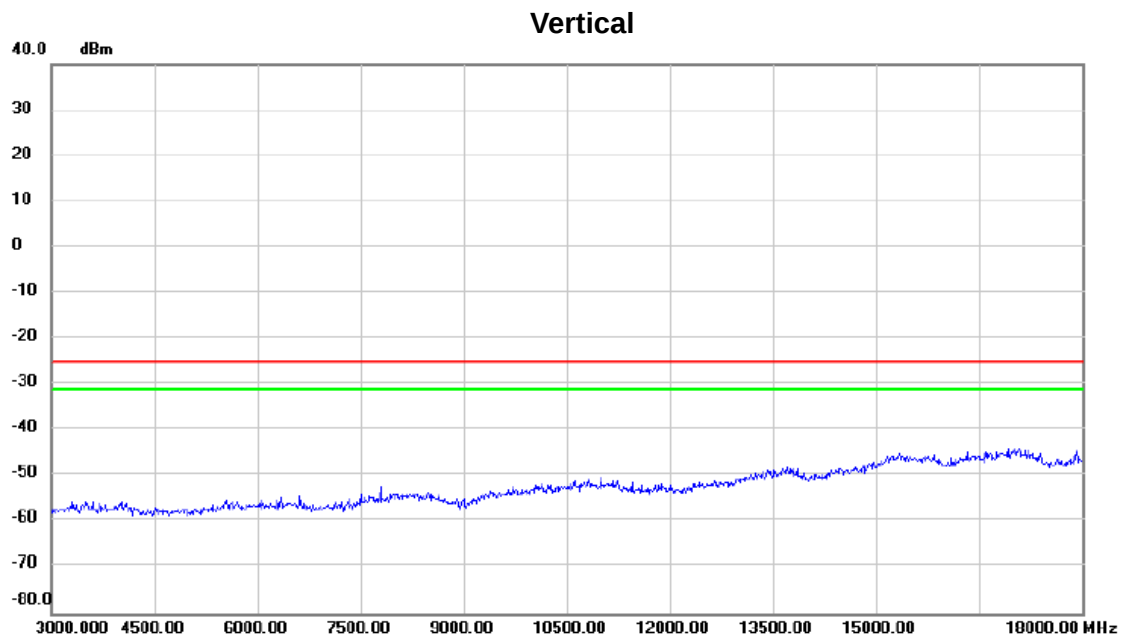


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode:	LTE Band 38_TX CH38150_20M_Internal Antenna
------------	---

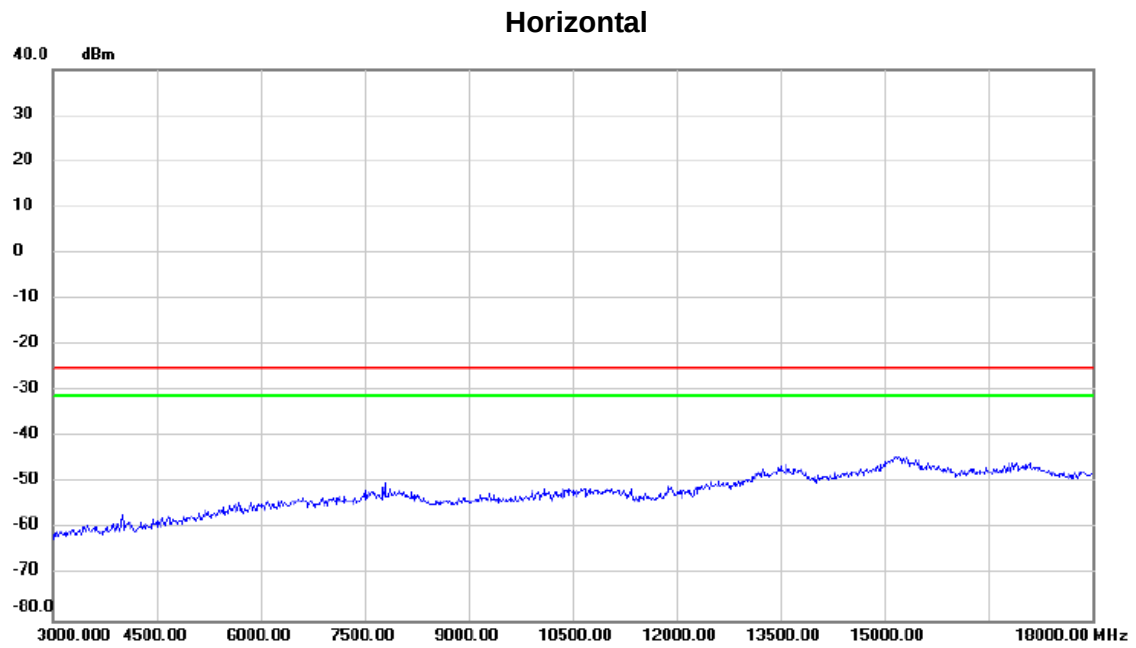


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode:	LTE Band 38_TX CH38150_20M_Internal Antenna
------------	---

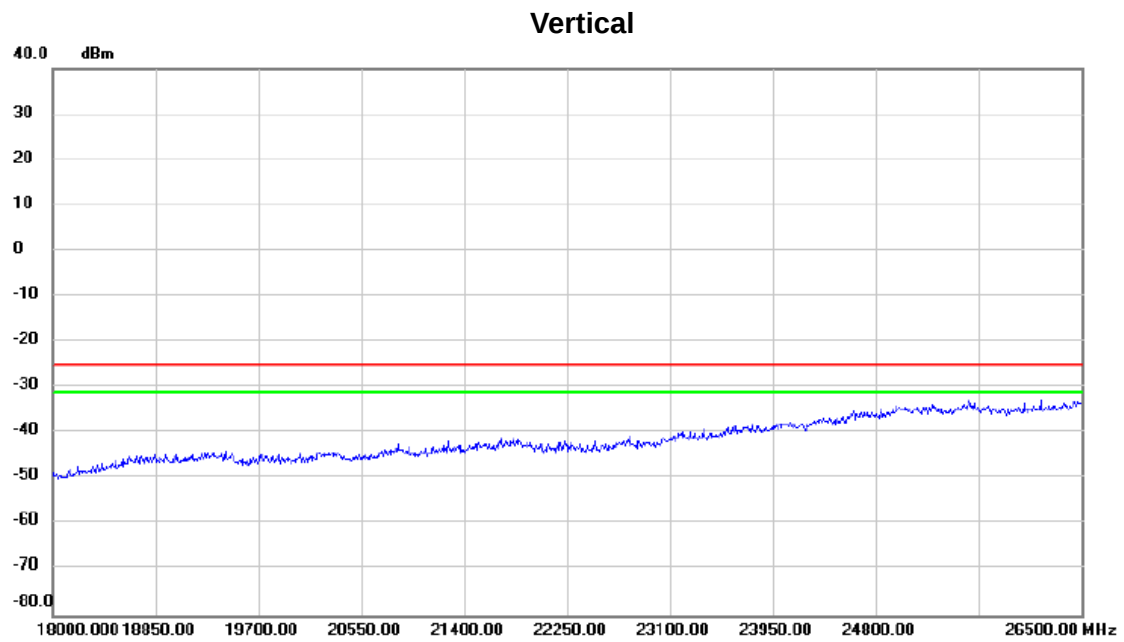

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		


Test Mode:	LTE Band 38_TX CH38150_20M_Internal Antenna
------------	---

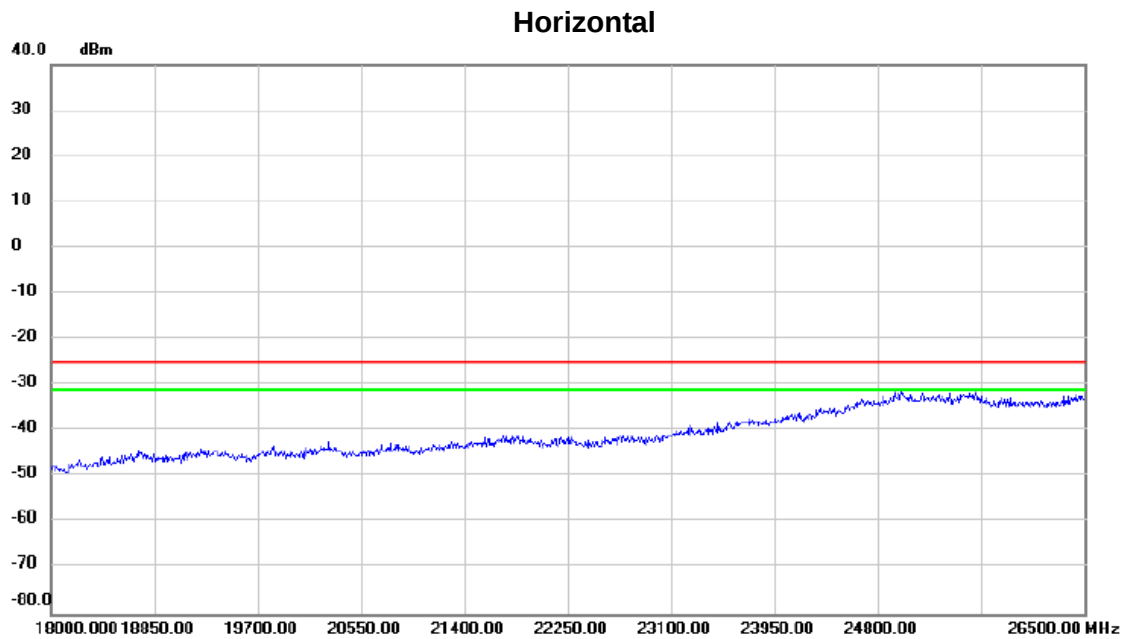

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_1dBi


Vertical

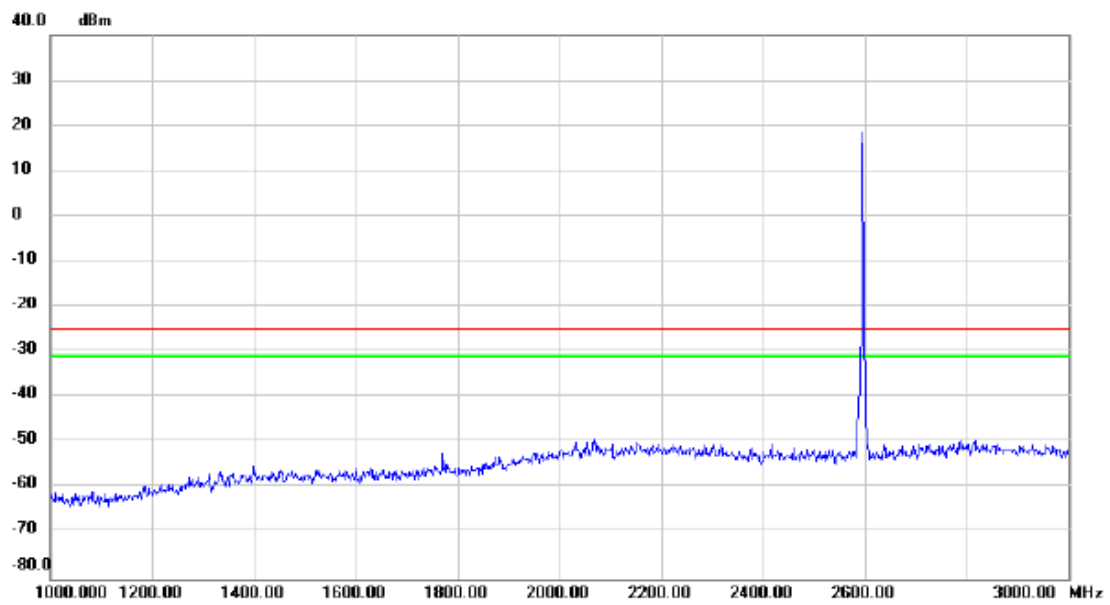

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_1dBi


Horizontal

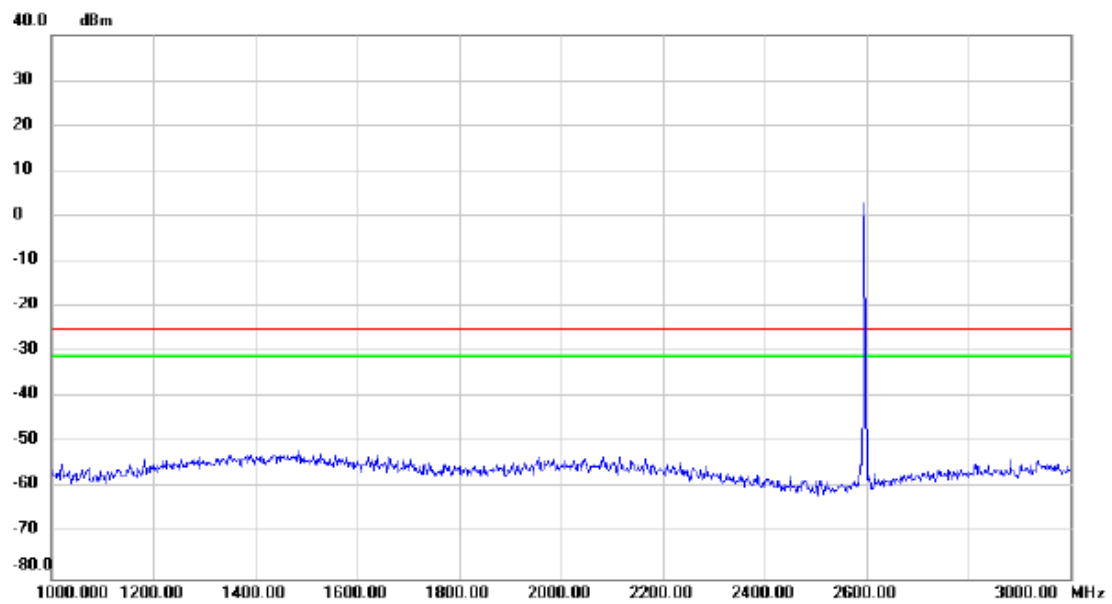

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_1dBi


Vertical

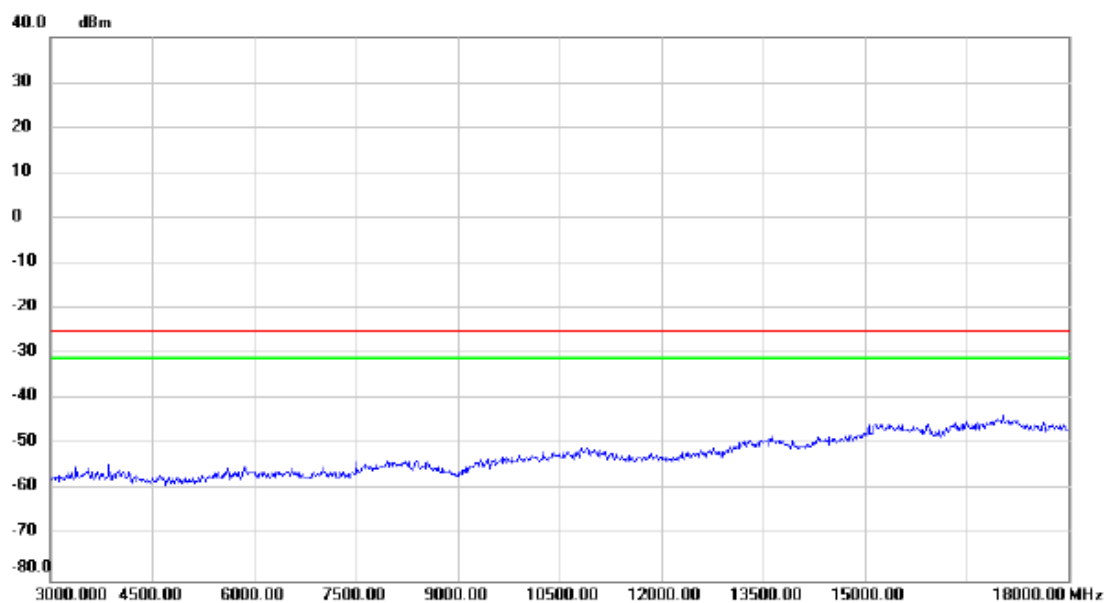

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_1dBi


Horizontal

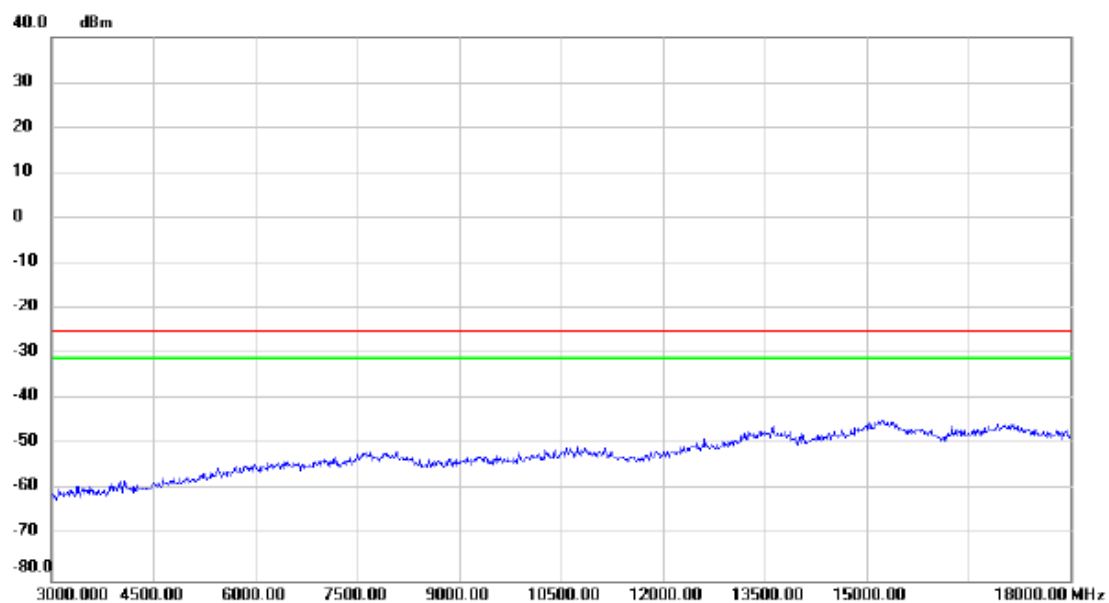

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38225_5M_External Antenna_1dBi
------------	---


Vertical

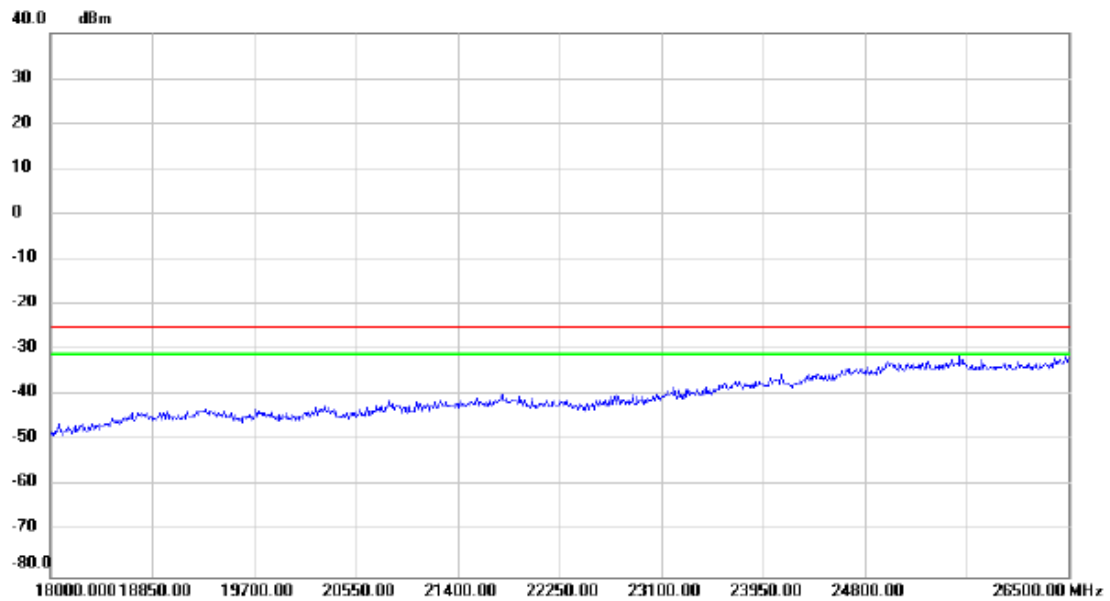

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38225_5M_External Antenna_1dBi
------------	---


Horizontal

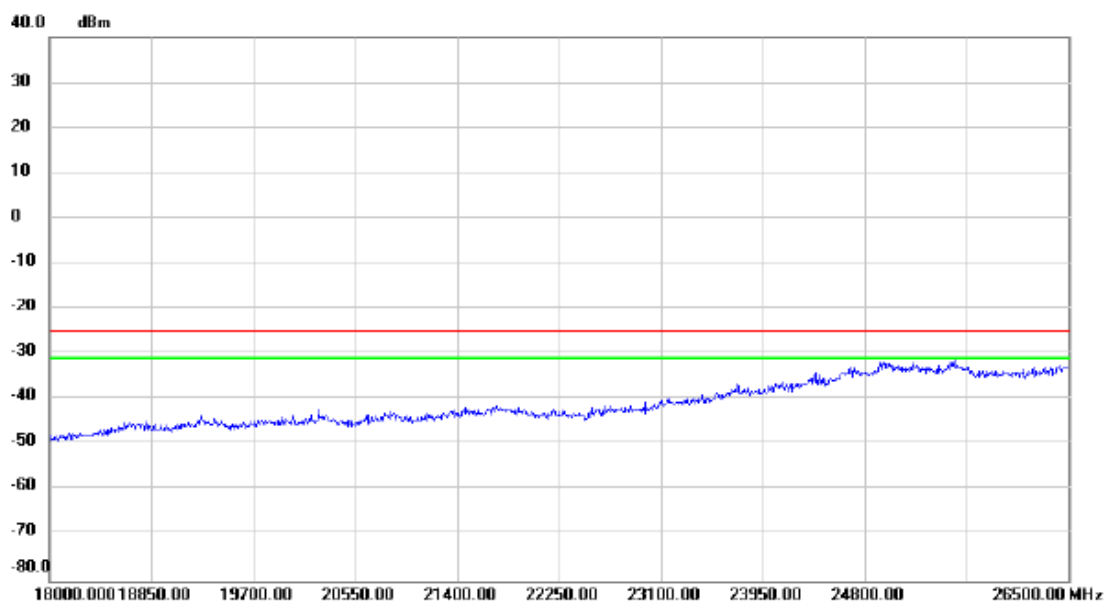

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode: LTE Band 38_TX CH38150_20M_External Antenna_1dBi


Vertical

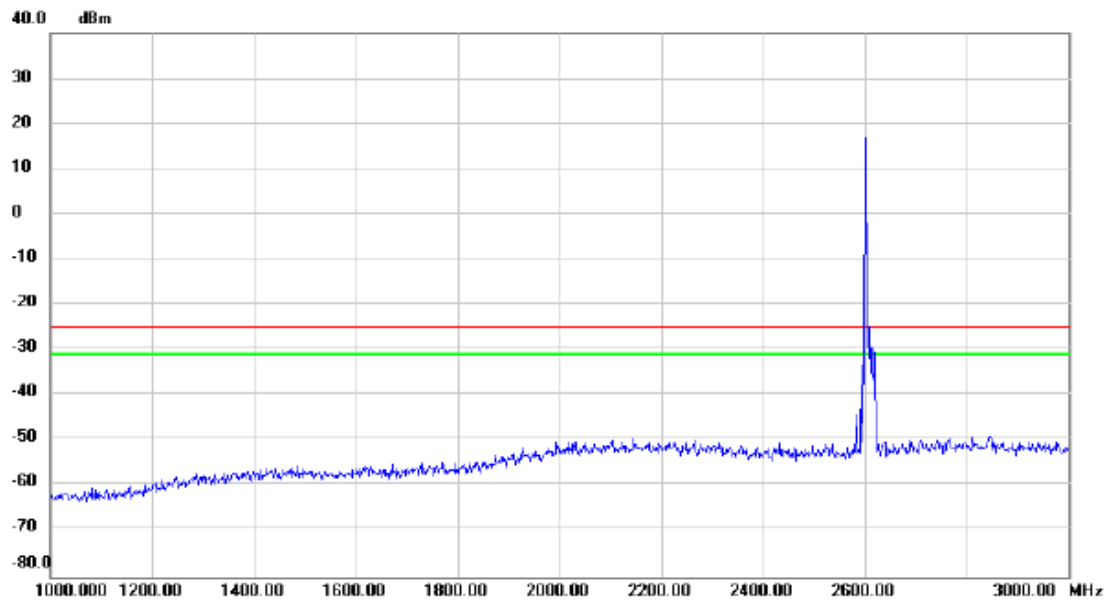

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode:	LTE Band 38_TX CH38150_20M_External Antenna_1dBi
------------	--


Horizontal

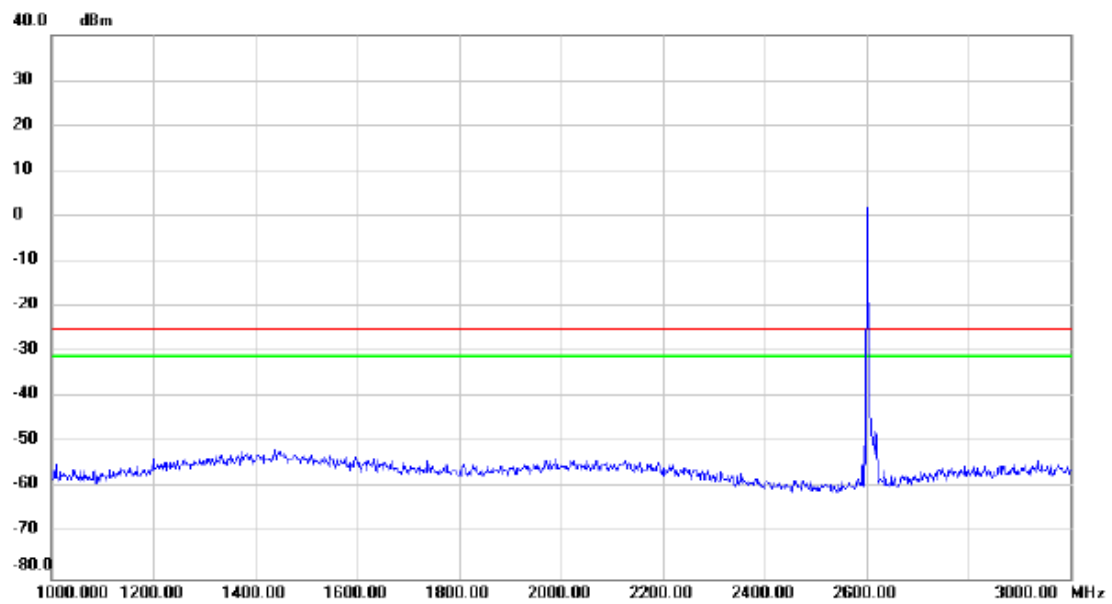

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38150_20M_External Antenna_1dBi
------------	--


Vertical

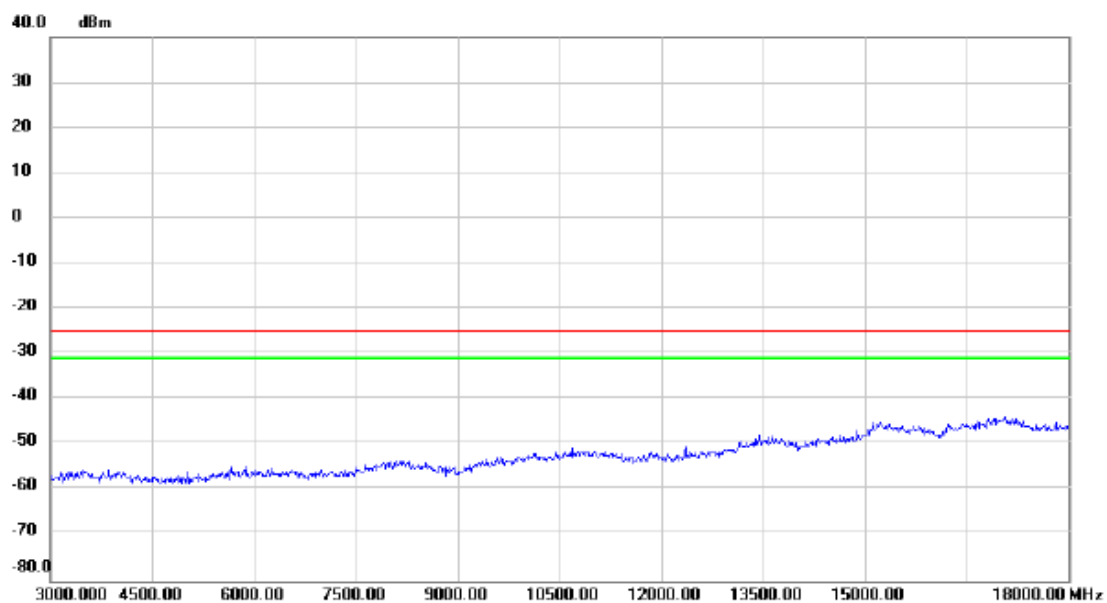

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: LTE Band 38_TX CH38150_20M_External Antenna_1dBi


Horizontal

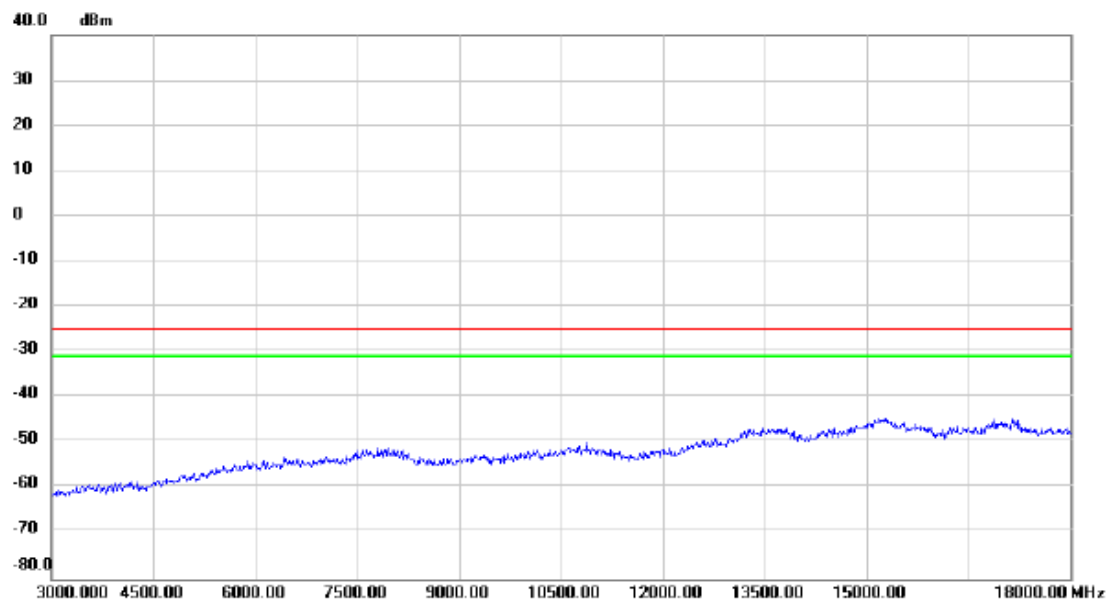

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38150_External Antenna_1dBi
------------	--


Vertical

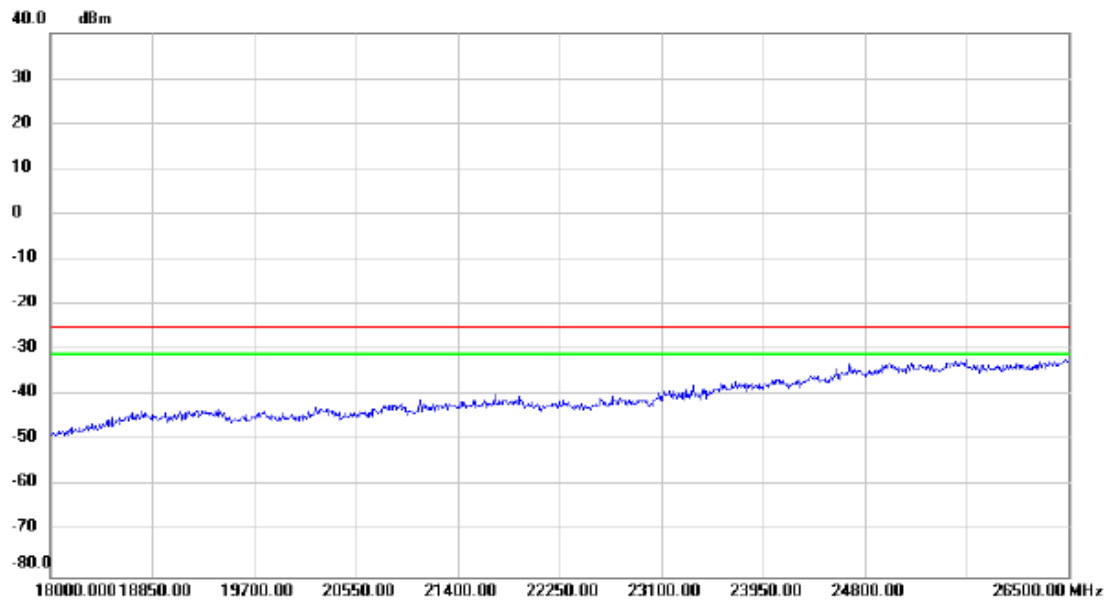

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38150_20M_External Antenna_1dBi
------------	--


Horizontal

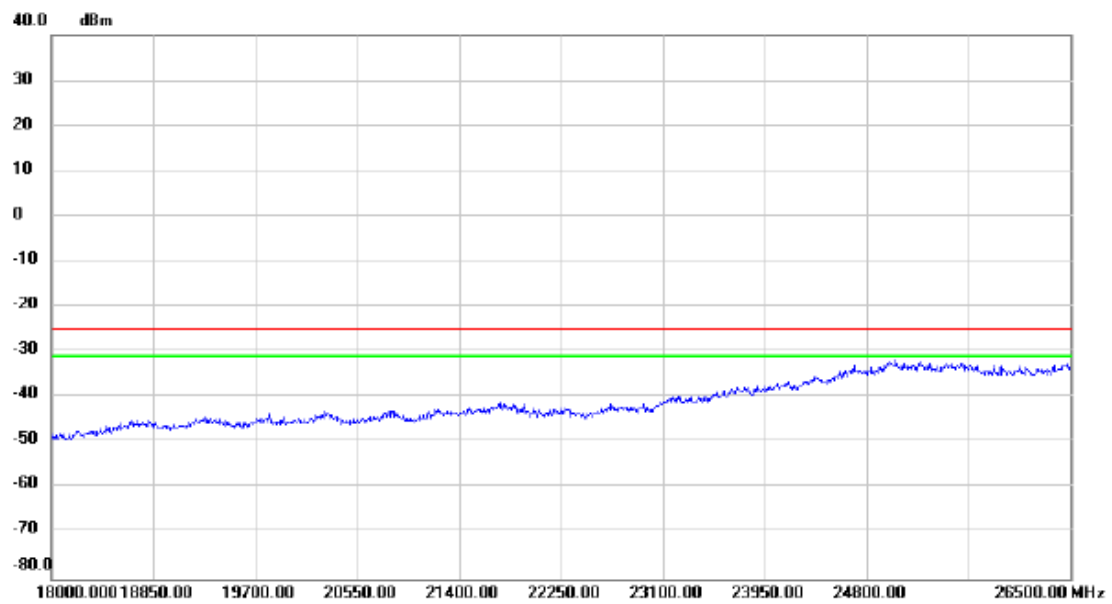

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38225_5M_External Antenna_3dBi
------------	---


Vertical

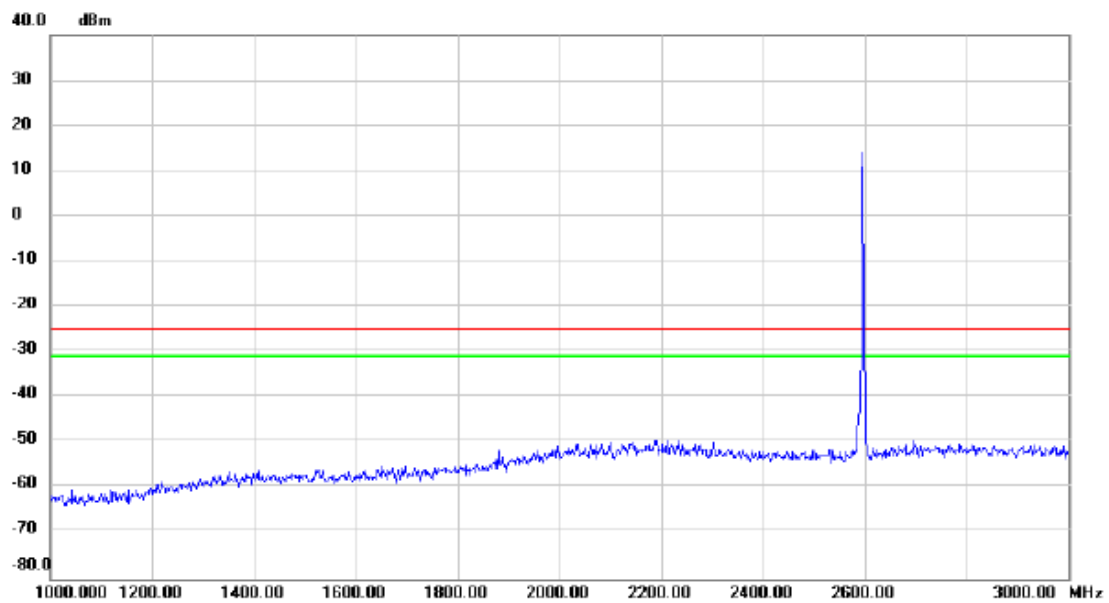

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_3dBi


Horizontal

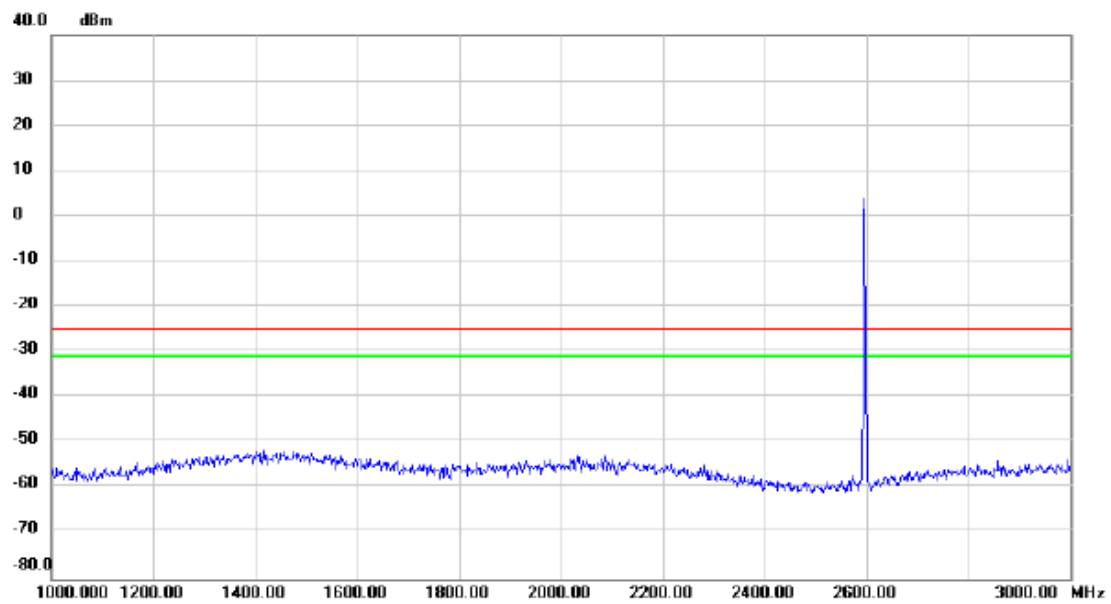

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38225_5M_External Antenna_3dBi
------------	---


Vertical

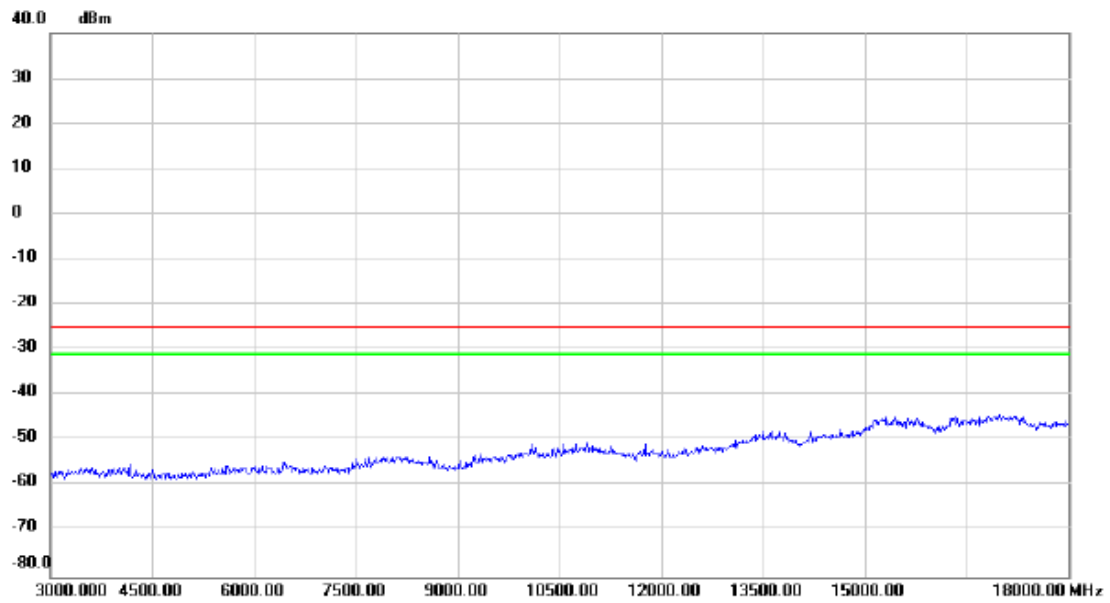

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_3dBi


Horizontal

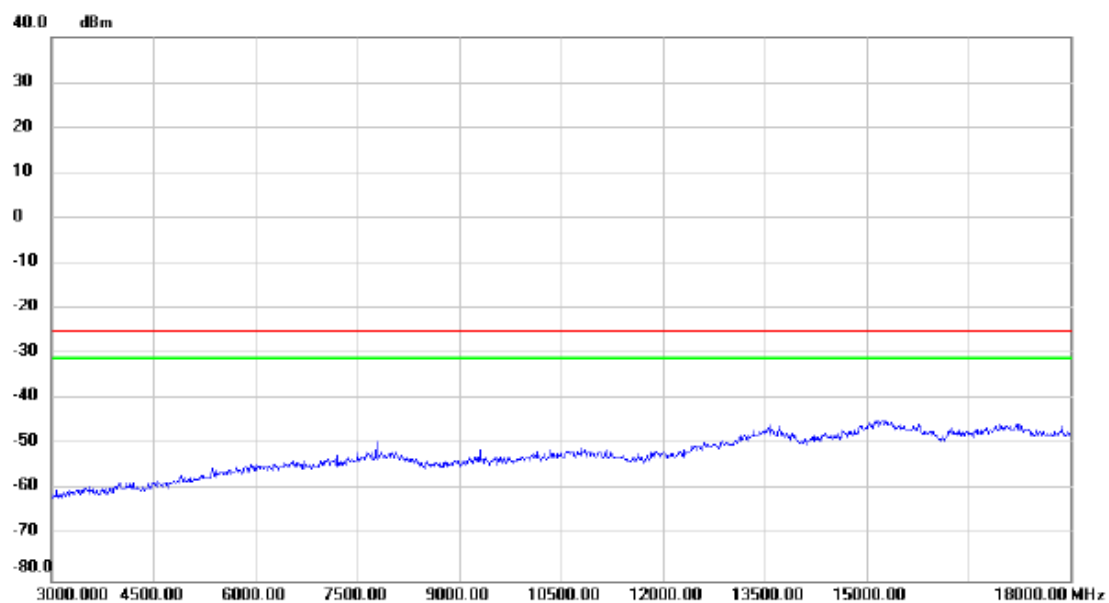

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode: LTE Band 38_TX CH38225_5M_External Antenna_3dBi


Vertical

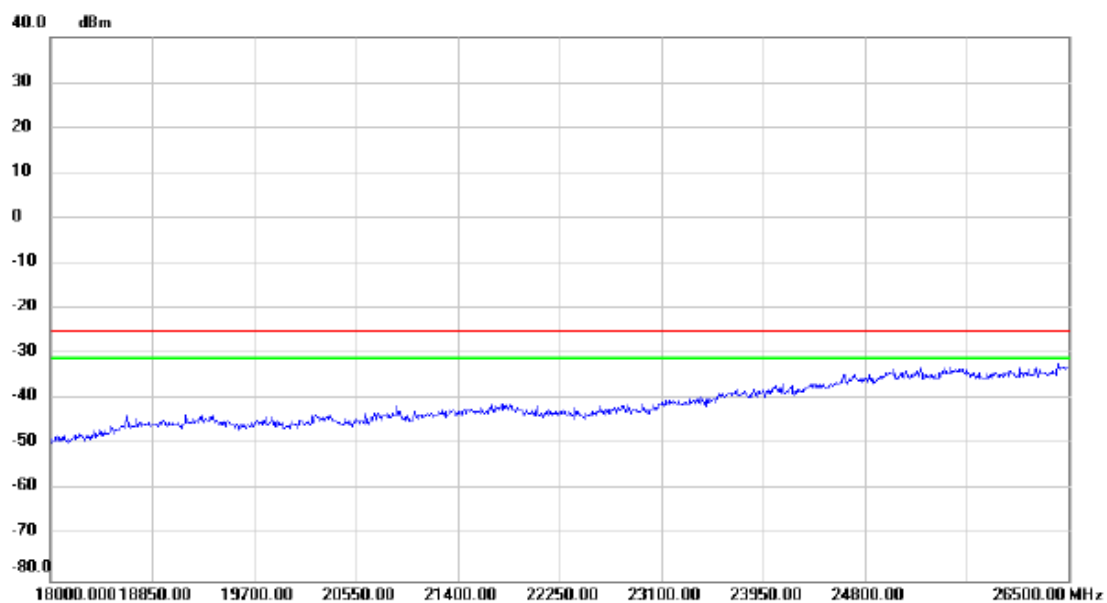

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode:	LTE Band 38_TX CH38225_5M_External Antenna_3dBi
------------	---


Horizontal

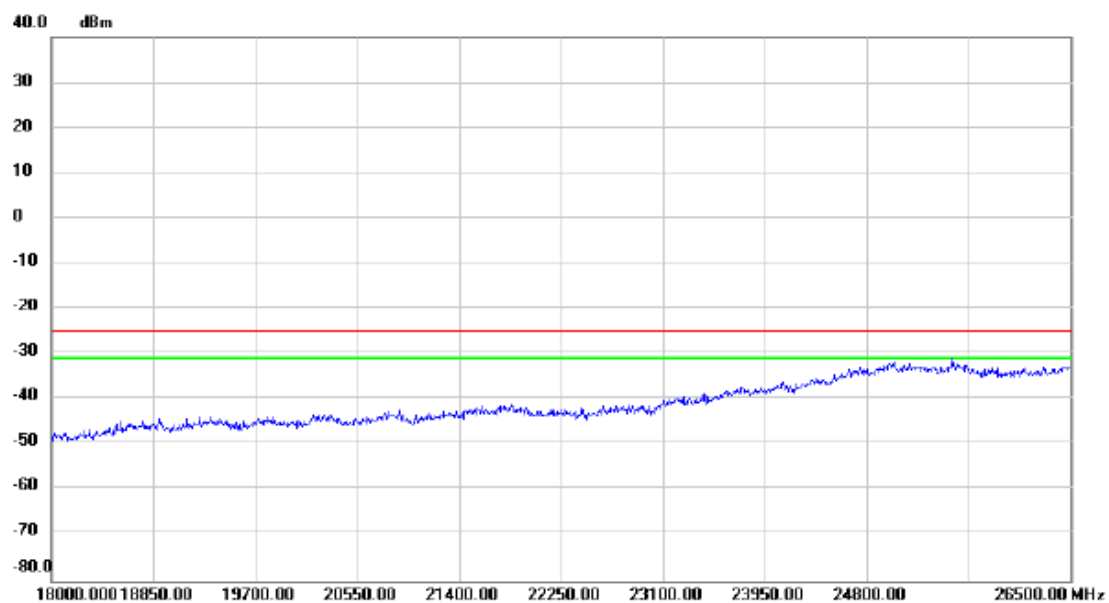

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38150_20M_External Antenna_3dBi
------------	--


Vertical

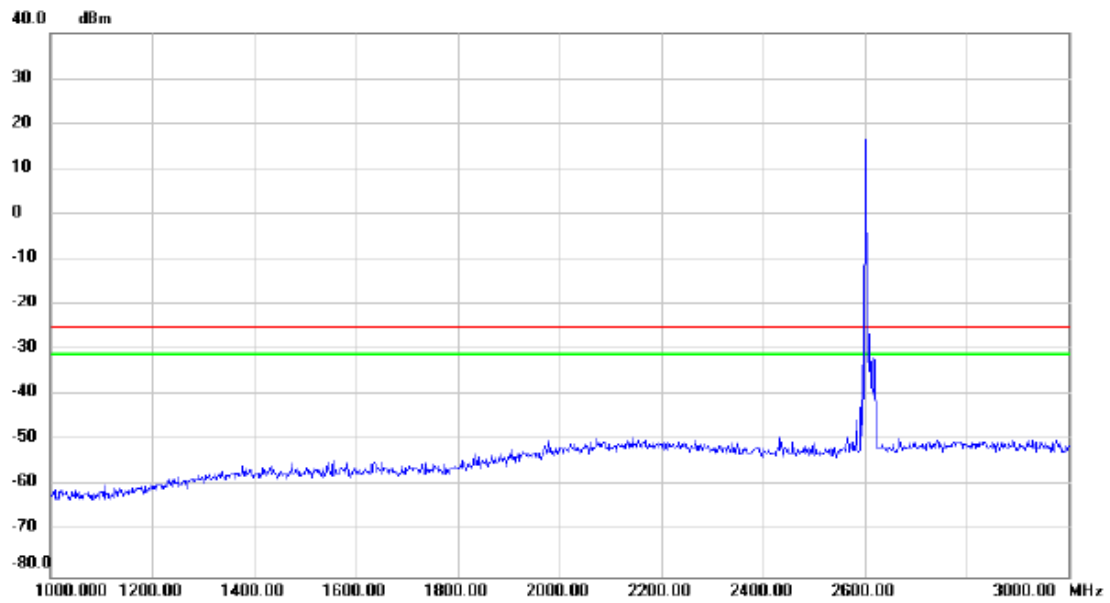

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode:	LTE Band 38_TX CH38150_20M_External Antenna_3dBi
------------	--


Horizontal

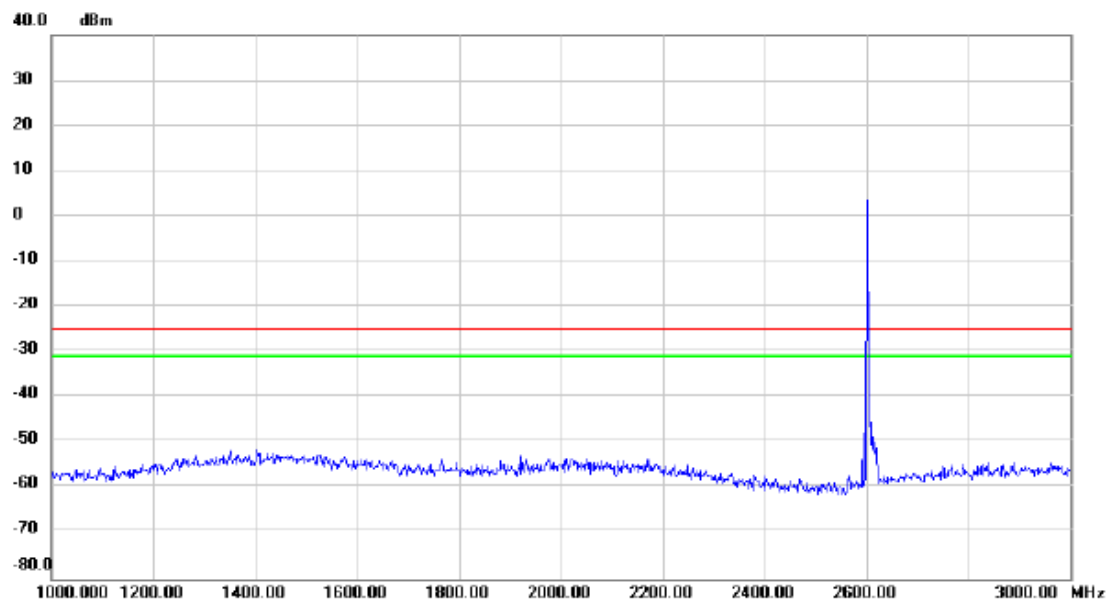

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38150_20M_External Antenna_3dBi
------------	--


Vertical

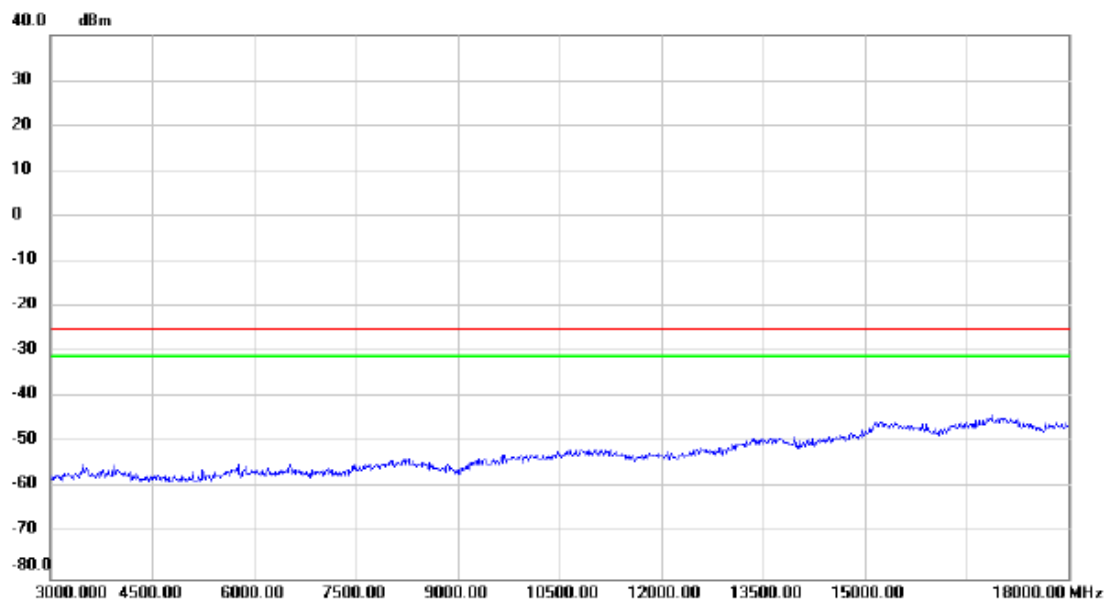

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode:	LTE Band 38_TX CH38150_20M_External Antenna_3dBi
------------	--


Horizontal

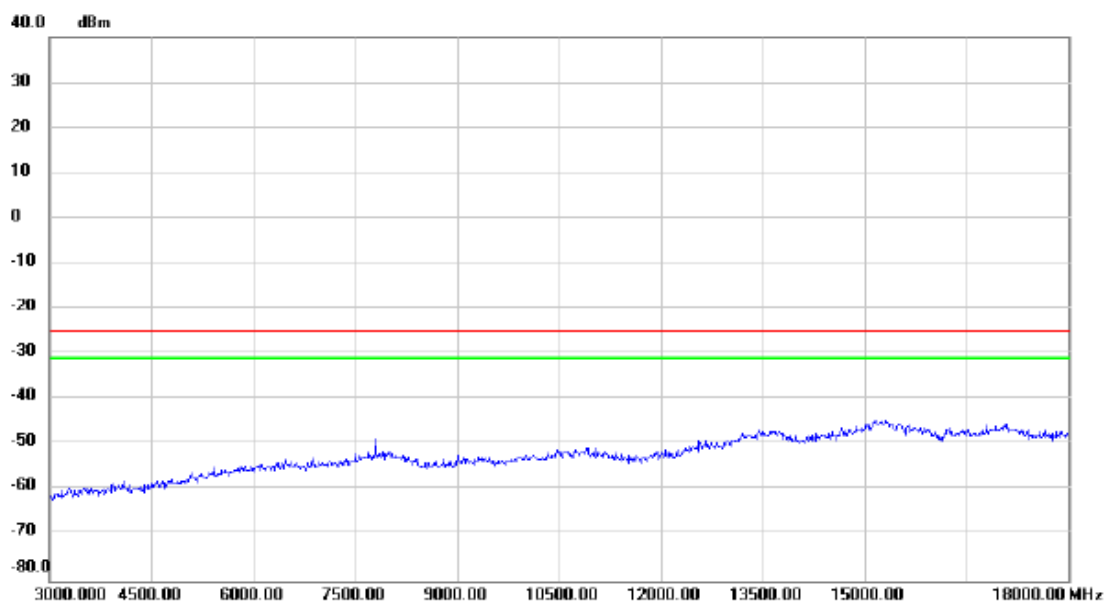

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

Test Mode:	LTE Band 38_TX CH38150_External Antenna_3dBi
------------	--


Vertical

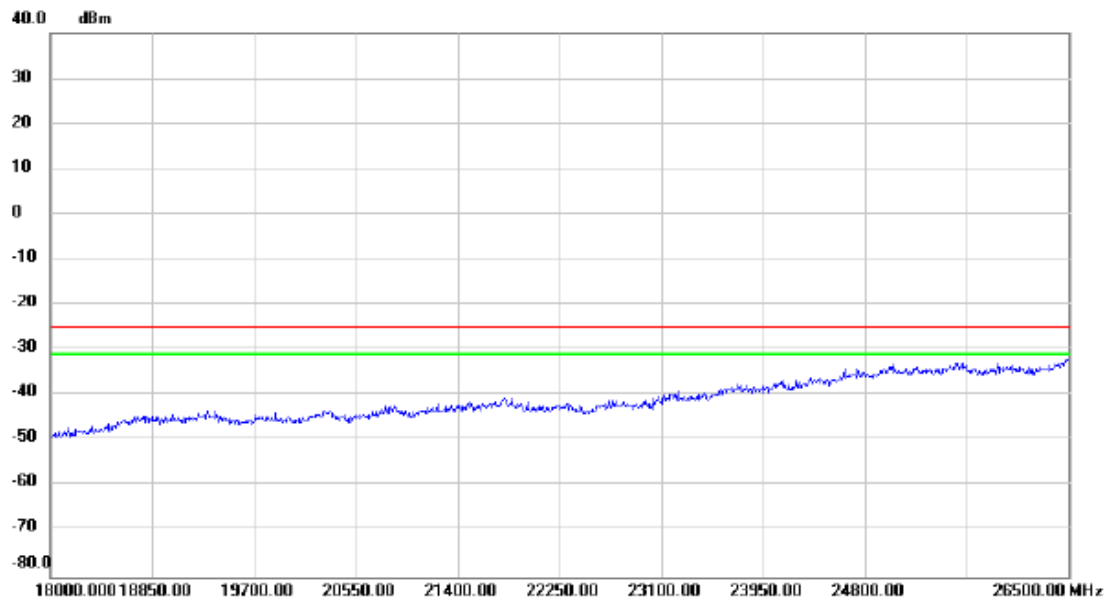

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment


Test Mode:	LTE Band 38_TX CH38150_20M_External Antenna_3dBi
------------	--

Horizontal

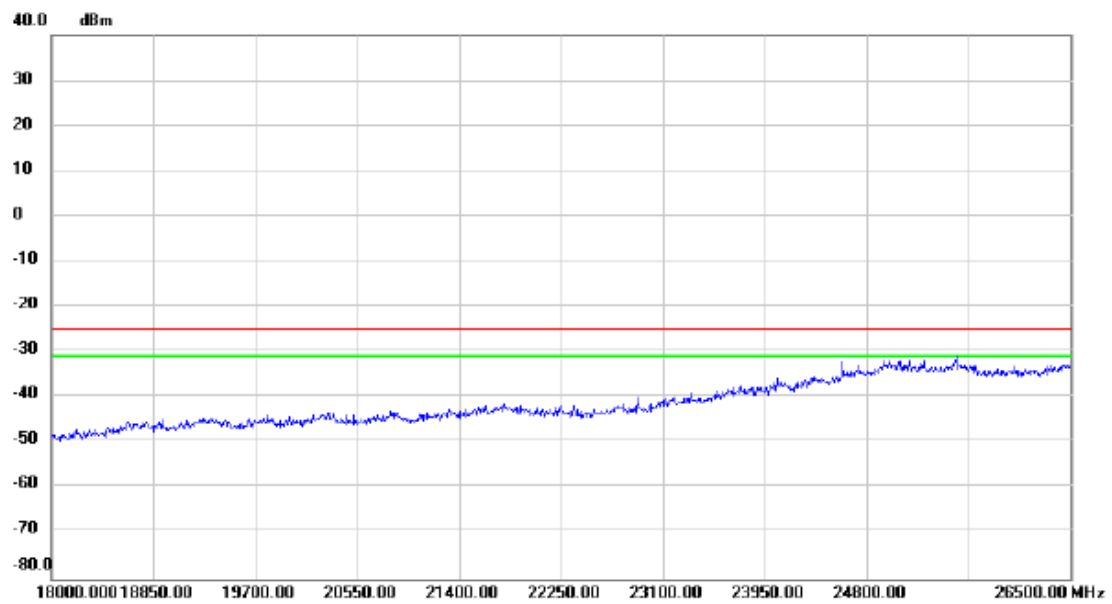

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		

APPENDIX G - BAND EDGE

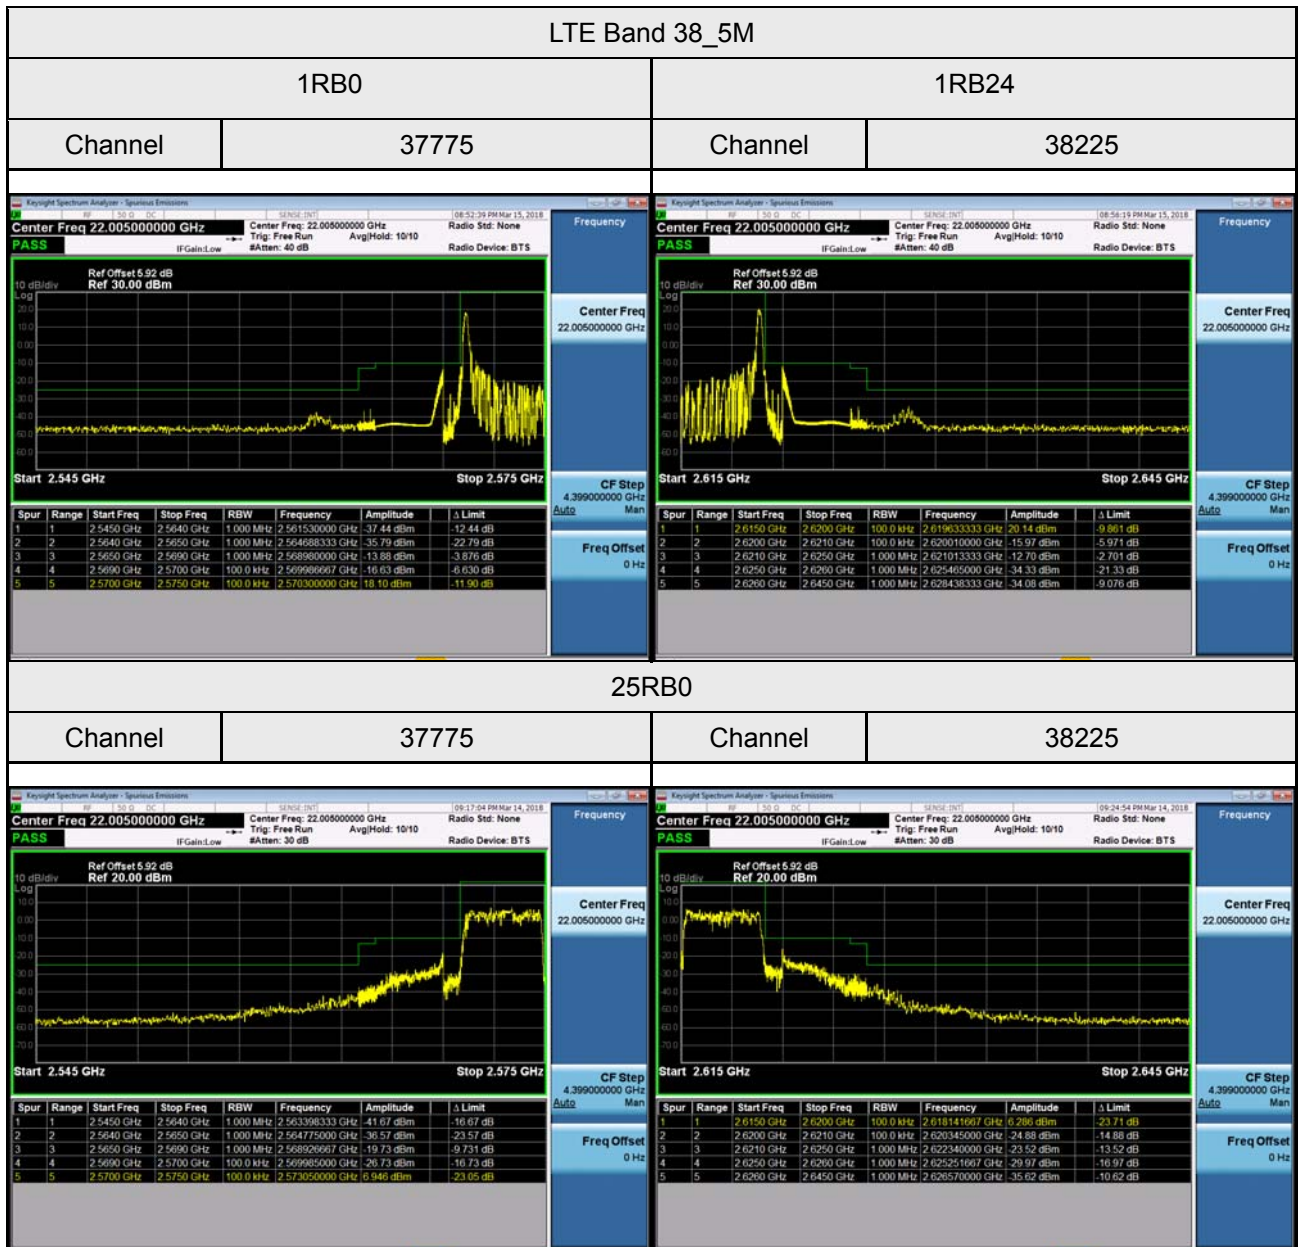

LTE Band 38_10M

1RB0



1RB49

Channel

37800

Channel

38200

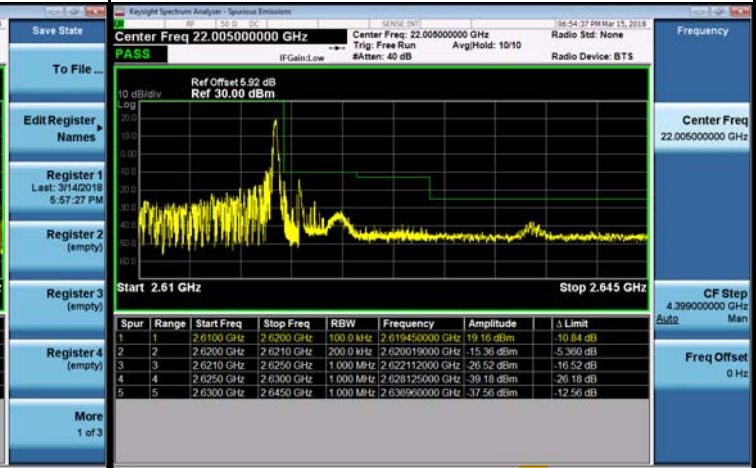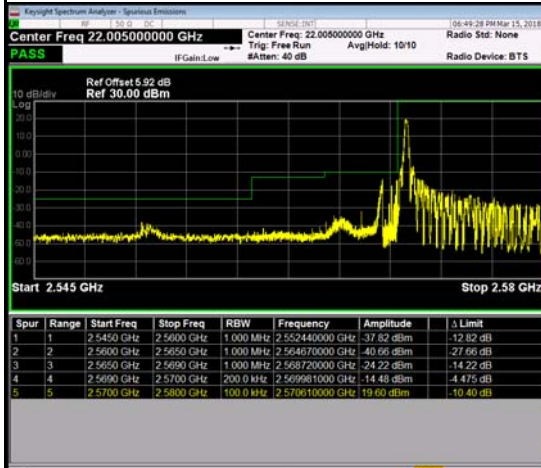


50RB0


Channel

37800

Channel

38200

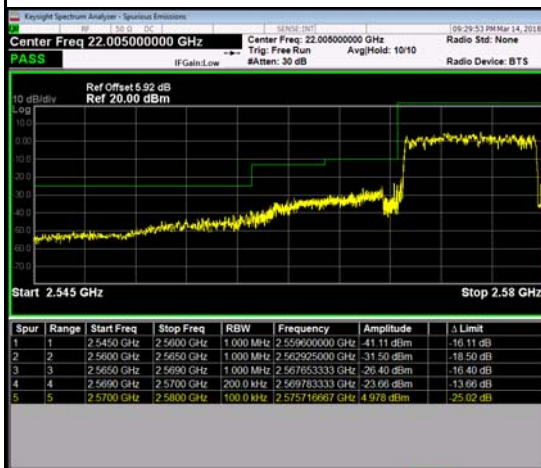

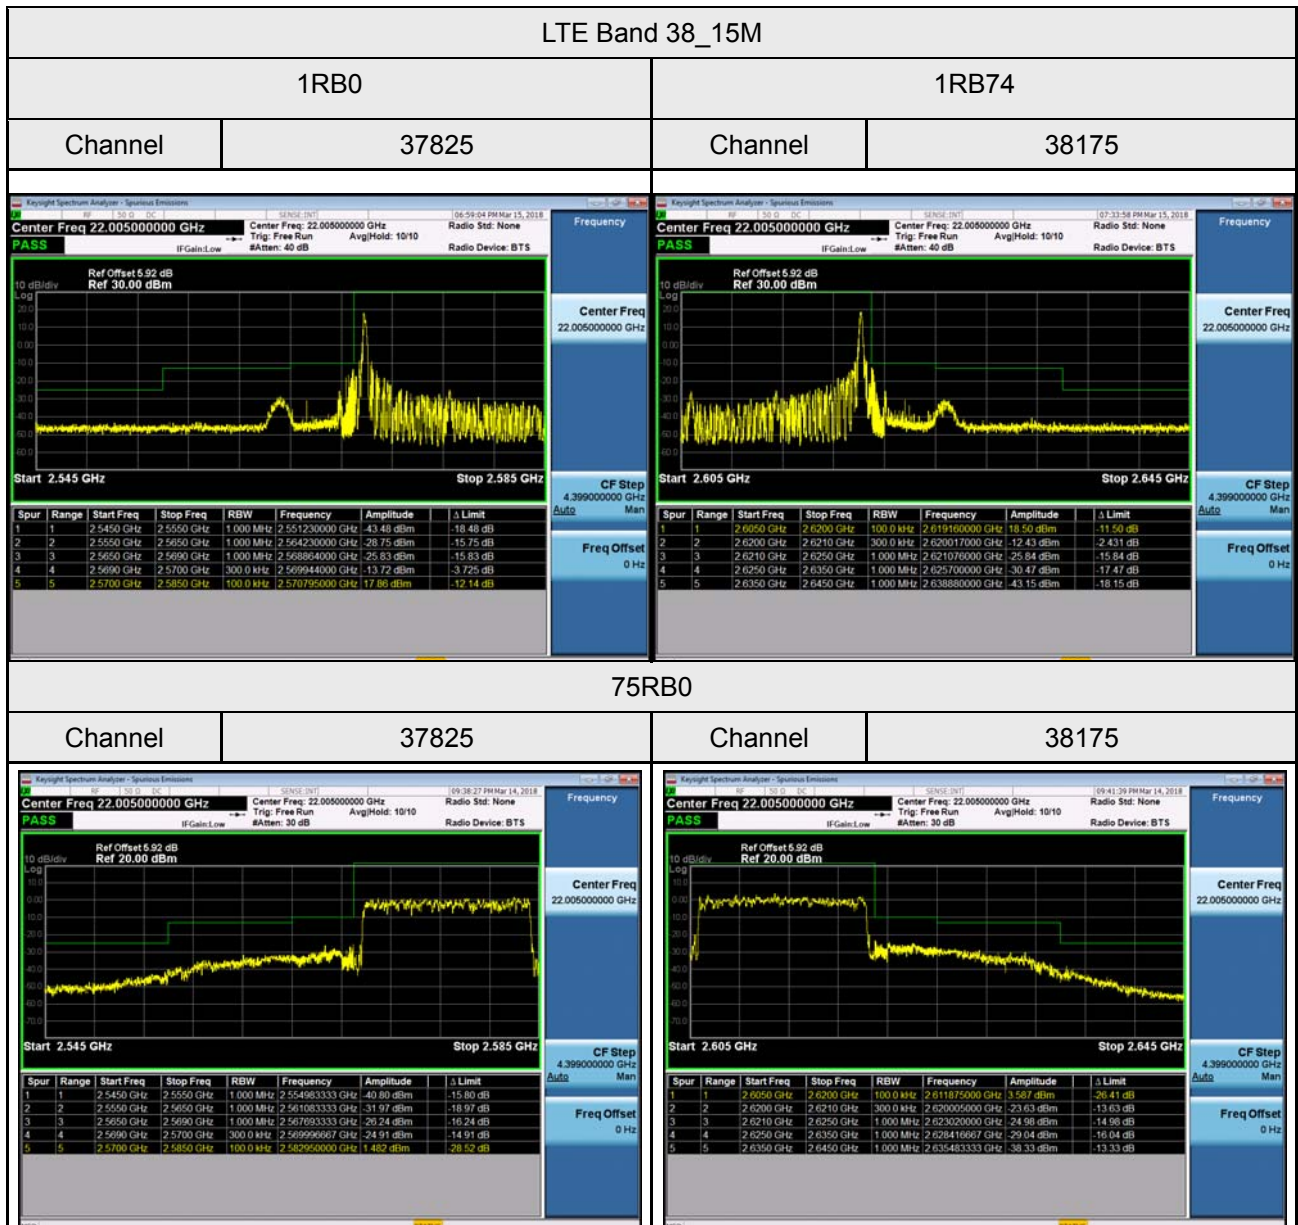

LTE Band 38_20M

1RB0



1RB99

Channel

37850

Channel

38150

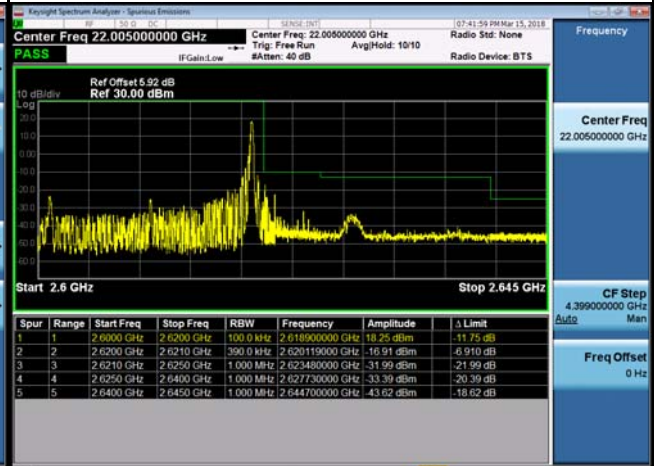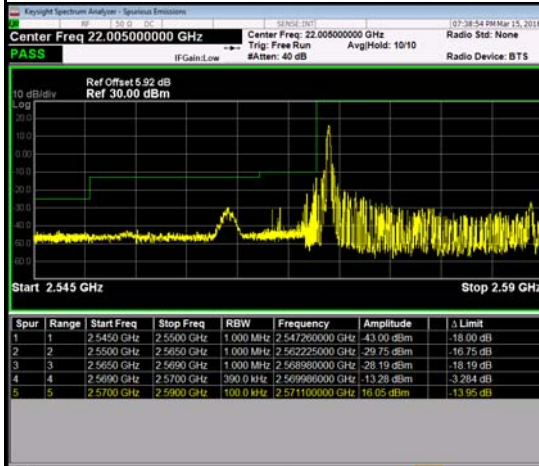



100RB0

Channel

37850

Channel

38150

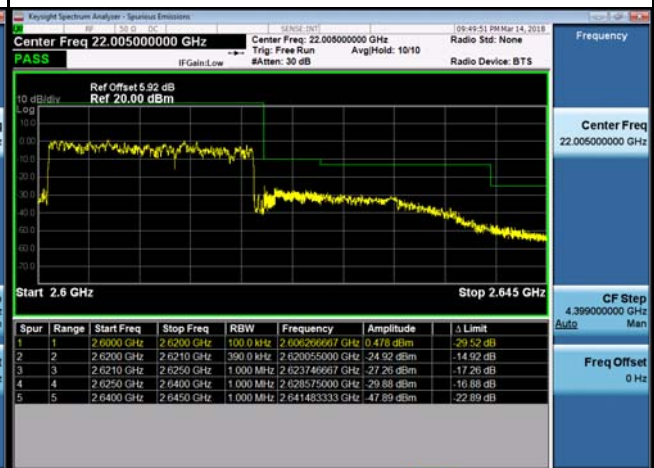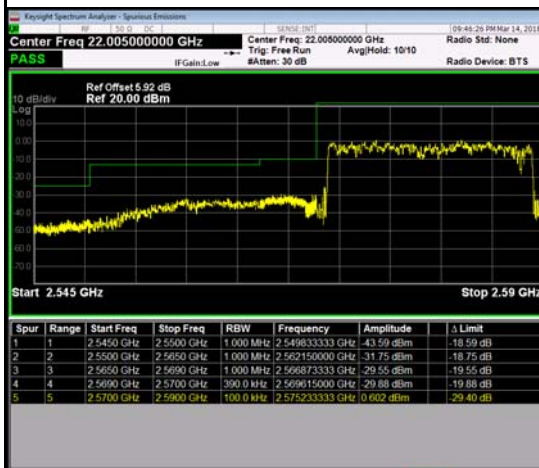

APPENDIX H - PEAK TO AVERAGE RATIO

LTE Band 38 Spectrum Plot_5M

QPSK-37775




QPSK-38000




QPSK-38225




16QAM-37775

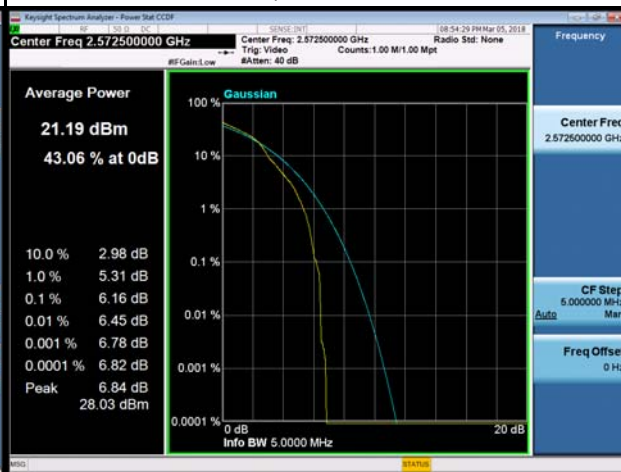

16QAM-38000

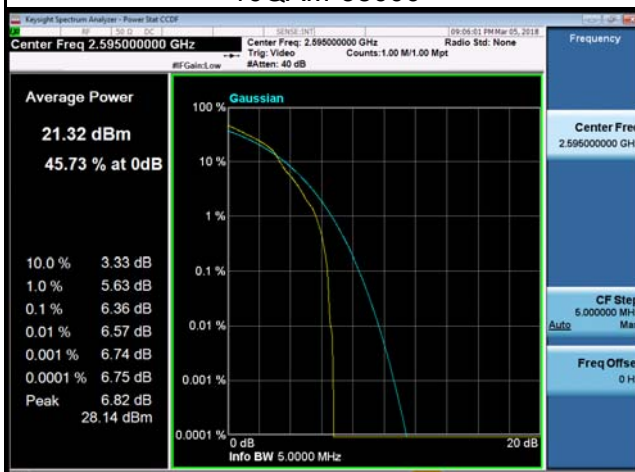


16QAM-38225

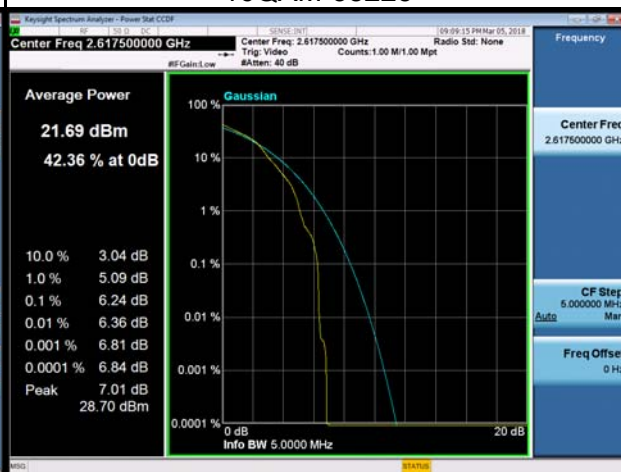

LTE Band 38 Spectrum Plot_10M


QPSK-37800

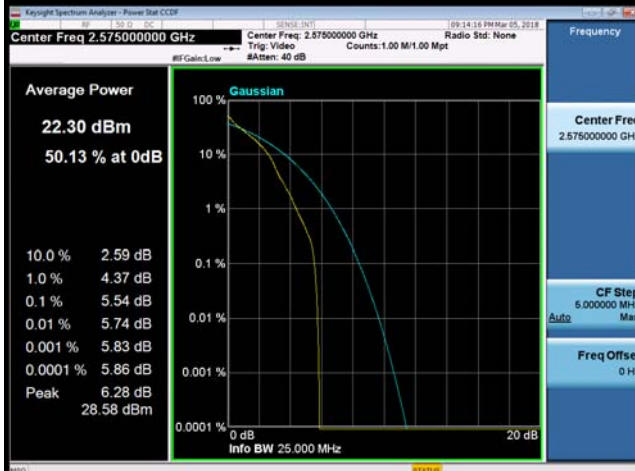

QPSK-38000



QPSK-38200

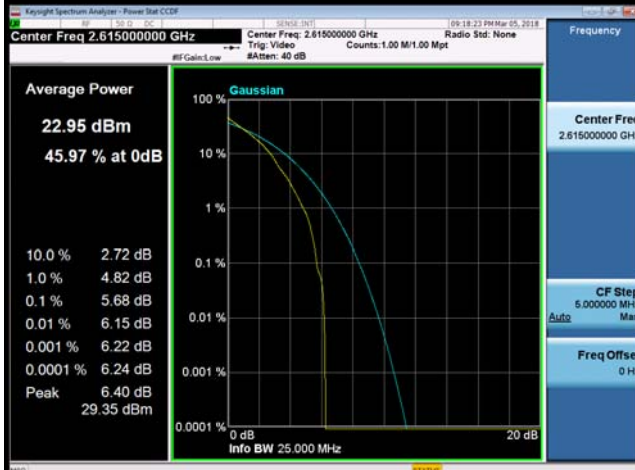


16QAM-37800



16QAM-38000




16QAM-38200

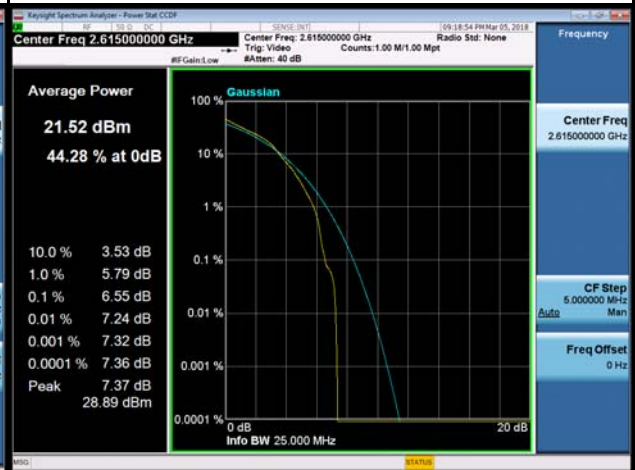


LTE Band 38 Spectrum Plot_15M


QPSK-37825

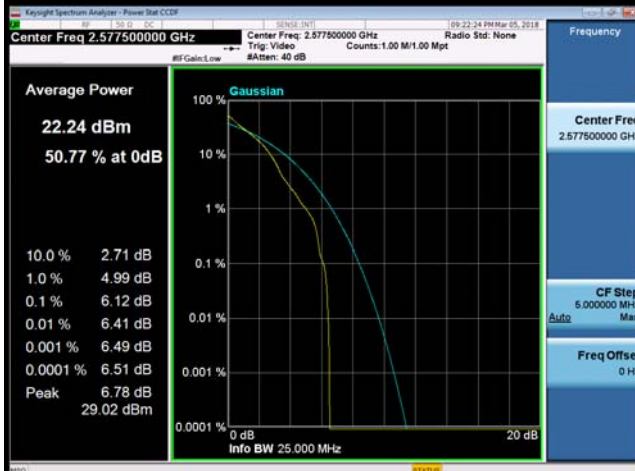

QPSK-38000

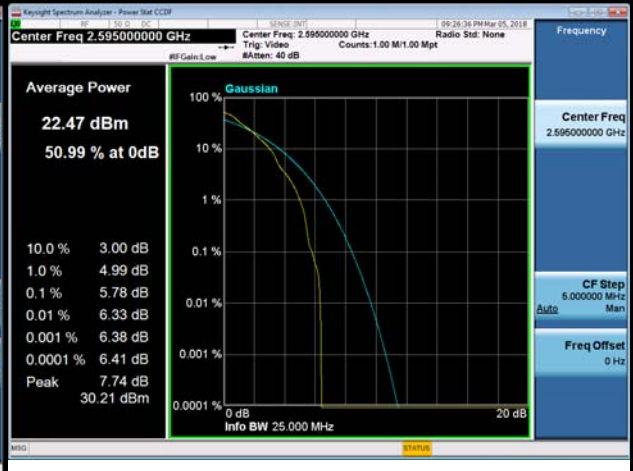

QPSK-38175

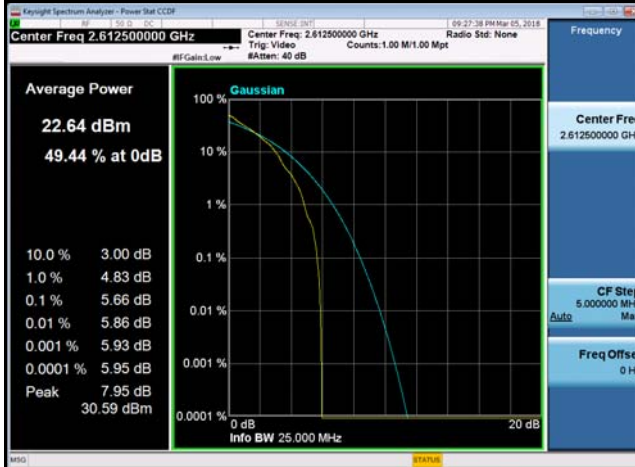

16QAM-37825



16QAM-38000




16QAM-38175




LTE Band 38 Spectrum Plot_20M


QPSK-37850

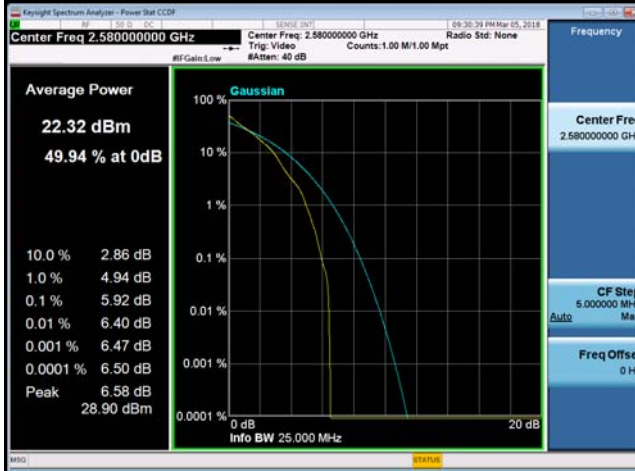


QPSK-38000

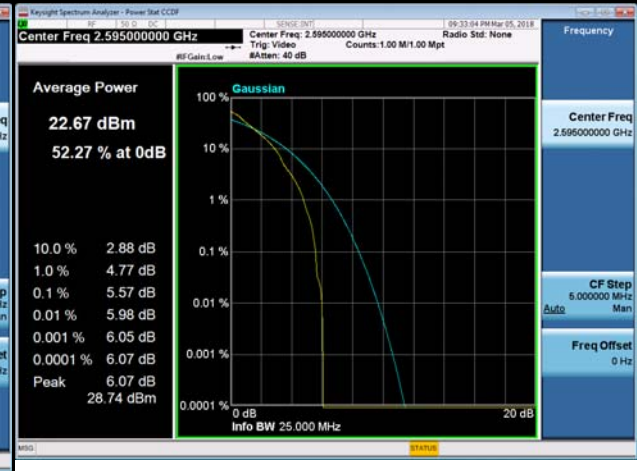


QPSK-38150

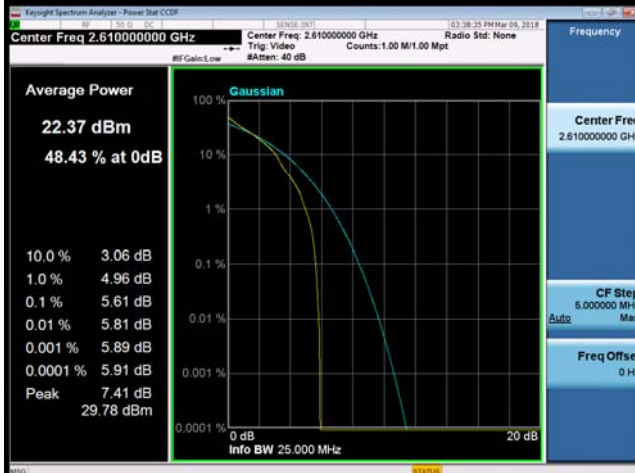


16QAM-37850

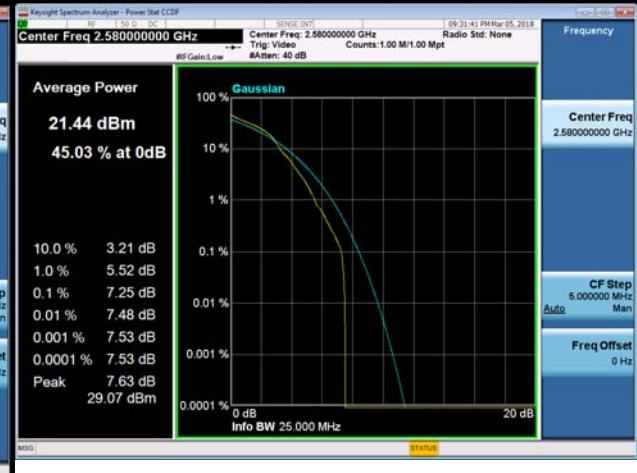

16QAM-38000

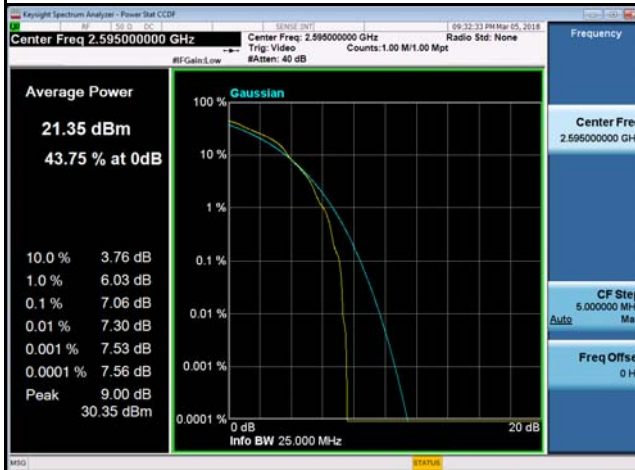

16QAM-38150

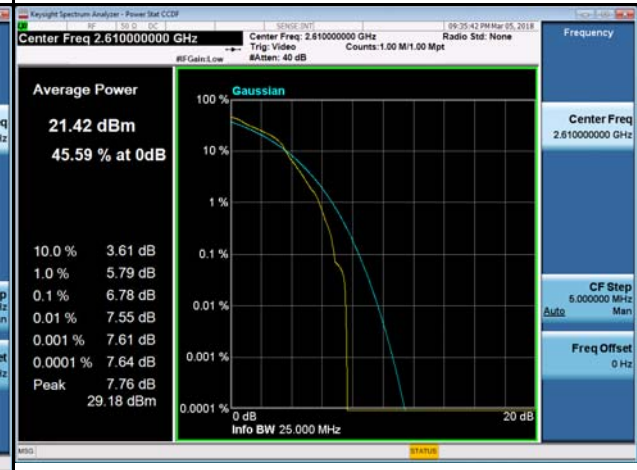

APPENDIX I - FREQUENCY STABILITY

Test Mode:	LTE Band 38_CH40690_5M
------------	------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	6.58	0.002535645	2.5
-20	-4.08	0.001572254	2.5
-10	-2.55	0.000982659	2.5
0	7.28	0.002805395	2.5
10	9.92	0.003822736	2.5
20	5.64	0.00217341	2.5
30	-8.98	0.003460501	2.5
40	3.34	0.001287091	2.5
50	-5.87	0.002262042	2.5
Max. Deviation (ppm)	9.92	0.003822736	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
10.80V	3.91	0.001506744	2.5
12.00V	-2.54	0.000978805	2.5
13.20V	6.09	0.002346821	2.5
Max. Deviation (ppm)	6.09	0.002346821	2.5

Test Mode:	LTE Band 38_CH40690_10M
------------	-------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	6.45	0.002485549	2.5
-20	7.82	0.003013487	2.5
-10	-5.65	0.002177264	2.5
0	6.87	0.002647399	2.5
10	-6.24	0.002404624	2.5
20	8.98	0.003460501	2.5
30	-3.74	0.001441233	2.5
40	3.63	0.001398844	2.5
50	-3.86	0.001487476	2.5
Max. Deviation (ppm)	8.98	0.003460501	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
10.80V	3.88	0.001495183	2.5
12.00V	-7.31	0.002816956	2.5
13.20V	-5.79	0.002231214	2.5
Max. Deviation (ppm)	7.31	0.002816956	2.5

Test Mode:	LTE Band 38_CH40690_15M
------------	-------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	3.82	0.001472	2.5
-20	-6.58	0.002536	2.5
-10	8.45	0.003256	2.5
0	-5.74	0.002212	2.5
10	7.54	0.002906	2.5
20	-6.24	0.002405	2.5
30	6.47	0.002493	2.5
40	3.84	0.00148	2.5
50	5.14	0.001981	2.5
Max. Deviation (ppm)	8.45	0.003256	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
10.80V	-3.68	0.001418	2.5
12.00V	8.26	0.003183	2.5
13.20V	-4.75	0.00183	2.5
Max. Deviation (ppm)	8.26	0.003183	2.5

Test Mode:	LTE Band 38_CH40690_20M
------------	-------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	-6.78	0.002613	2.5
-20	7.58	0.002921	2.5
-10	-4.42	0.001703	2.5
0	6.72	0.00259	2.5
10	-4.47	0.001723	2.5
20	6.28	0.00242	2.5
30	4.52	0.001742	2.5
40	6.52	0.002513	2.5
50	-5.79	0.002231	2.5
Max. Deviation (ppm)	7.58	0.002921	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
10.80V	5.66	0.002181	2.5
12.00V	-7.35	0.002832	2.5
13.20V	6.18	0.002382	2.5
Max. Deviation (ppm)	7.35	0.002832	2.5