

# FCC Radio Test Report

## FCC ID: QISBTV-DL09

This report concerns (check one):  Original Grant  Class II Change

**Project No.** : 1607C225  
**Equipment** : HUAWEI MediaPad M3  
**Model Name** : BTV-DL09  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

**Date of Receipt** : Jul. 21, 2016  
**Date of Test** : Jul. 21, 2016 ~ Aug. 08, 2016  
**Issued Date** : Aug. 09, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** : Shawn Xiao  
(Shawn Xiao)

**Technical Manager** : David Mao  
(David Mao)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
<b>3 . GENERAL INFORMATION</b>	<b>7</b>
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
<b>4 . EMC EMISSION TEST</b>	<b>12</b>
4.1 RADIATED EMISSION MEASUREMENT	12
4.1.1 RADIATED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS (9K TO 30MHz)	16
4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	16
4.1.9 TEST RESULTS (ABOVE 1000 MHz)	16
<b>5 . MEASUREMENT INSTRUMENTS LIST</b>	<b>17</b>
<b>ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)</b>	<b>18</b>
<b>ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>31</b>
<b>ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>80</b>

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1607C225	Original Issue.	Aug. 09, 2016

## 1. CERTIFICATION

Equipment : HUAWEI MediaPad M3  
Brand Name : HUAWEI  
Model Name : BTV-DL09  
Applicant : Huawei Technologies Co., Ltd.  
Manufacturer : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Date of Test : Jul. 21, 2016 ~ Aug. 08, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1607C225) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.407(a)	Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

### 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.  
BTL's test firm number for FCC: 319330

### 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 .The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{CISPR}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad M3	
Brand Name	HUAWEI	
Model Name	BTV-DL09	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	150Mbps
Software Version	BTV-DL09C001B102	
Hardware version	SH1BTVDL09M	
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) DONGGUAN PHITEK ELECTRONICS CO.,LTD Model: HW-050200U01 #2 Supplied from battery.	
Power Rating	#1 I/P: ~100-240V 50/60Hz 0.5A O/P: 5V $\overline{=}$ 2A 10W #2 DC 3.82V	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB2899C0ECW
	SCUD (FUJIAN) Electronics Co., Ltd	
	Harbin Coslight Power Co., Ltd.	
USB Cable	Luxshare Precision Industry Co., Ltd	L99U2018-CS-H
	SHEN ZHEN PANG NGAI INDUSTRIAL	H09-000543
	FOXCONN INTERCONNECT	CUBB01M-HC306-DH
Earphone	Harman Embedded Audio, LLC	E050-0021-001

3. Channel List:

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-3		UNII-3		UNII-3	
\Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode/ CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode/ CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode/ CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode/ CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode/ CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode/ CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode/ CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode/ CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)

**Note:**

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

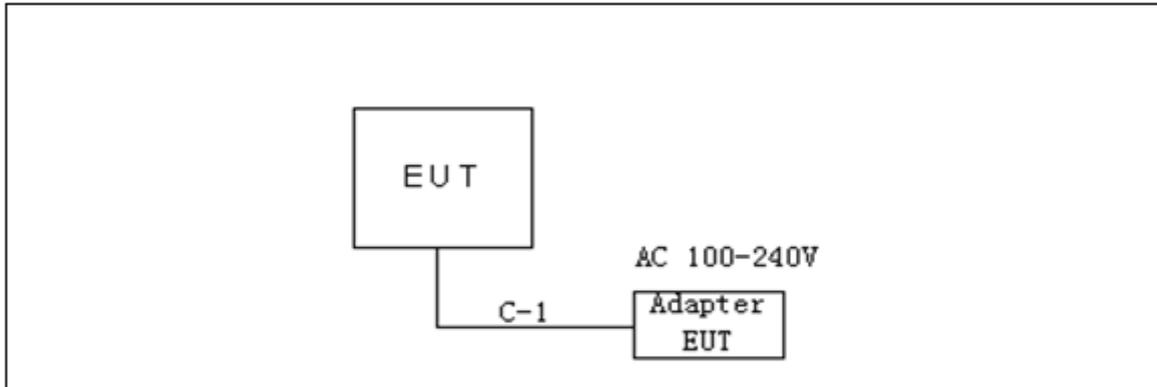

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.1m	USB Cable

## 4. EMC EMISSION TEST

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

#### 4.1.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 or 1.5 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting conducted emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.1.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency 30 - 1000MHz

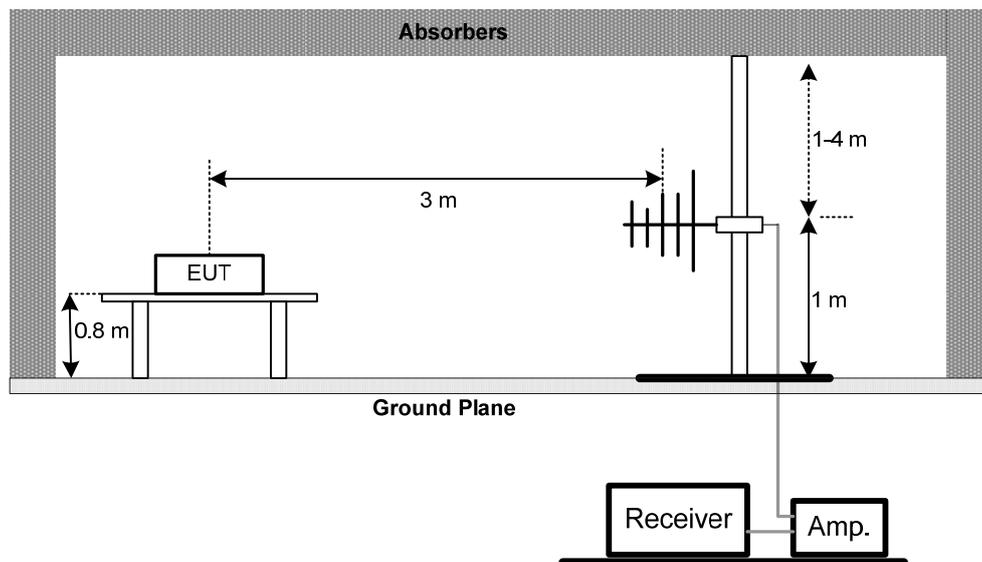


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz  
Band edge

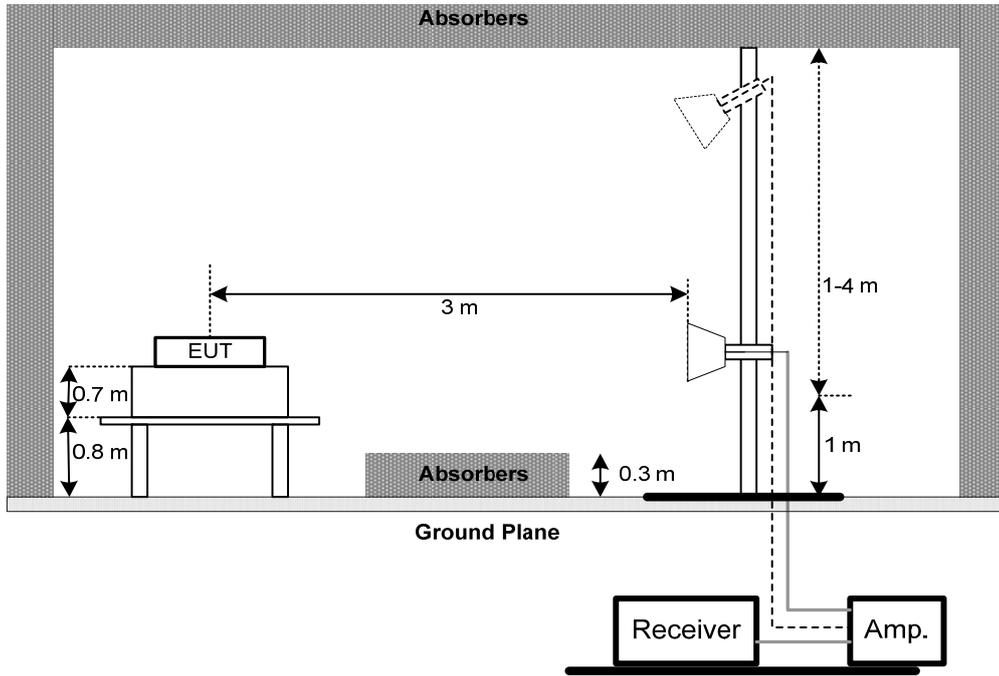

Harmonic

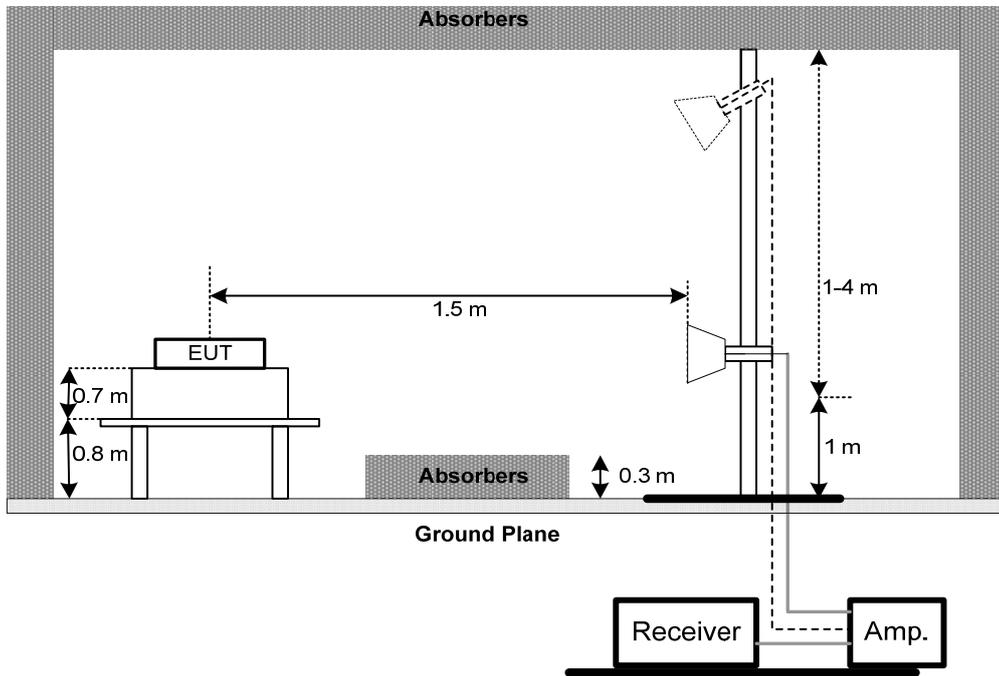

(C) Radiated emissions below 30MHz

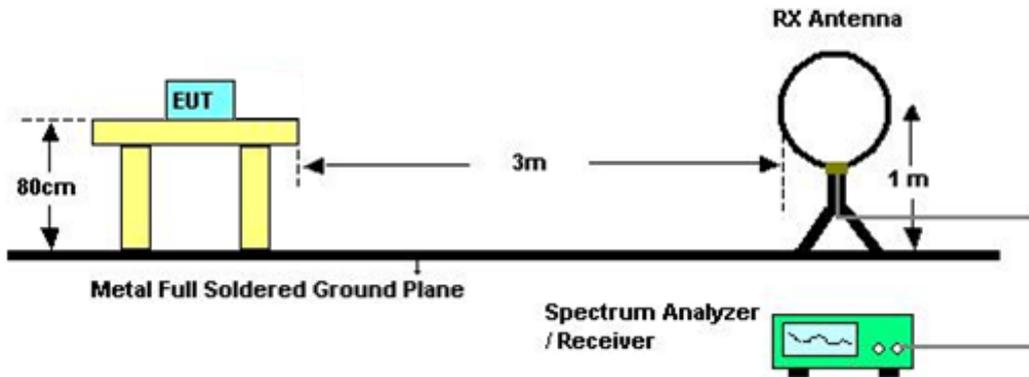

**4.1.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

**4.1.6 EUT TEST CONDITIONS**

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: AC 120V/60Hz

#### **4.1.7 TEST RESULTS (9K TO 30MHz)**

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log$  (specific distance / test distance) (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### **4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)**

Please refer to the Attachment C.

#### **4.1.9 TEST RESULTS (ABOVE 1000 MHz)**

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown " \* " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axes:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (5) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (6) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. MEASUREMENT INSTRUMENTS LIST


Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 27, 2017
5	Antenna	ETS	3115	00075789	Mar. 27, 2017
6	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
7	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
8	Test Cable	emci	EMC104-SM-SM-10000(1GHz-26.5GHz)	C-68	Jun. 27, 2017
9	Controller	CT	SC100	N/A	N/A
10	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 27, 2017
11	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017
12	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016
13	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)


Test Mode: TX Mode – Adapter: BYD

Ant0°

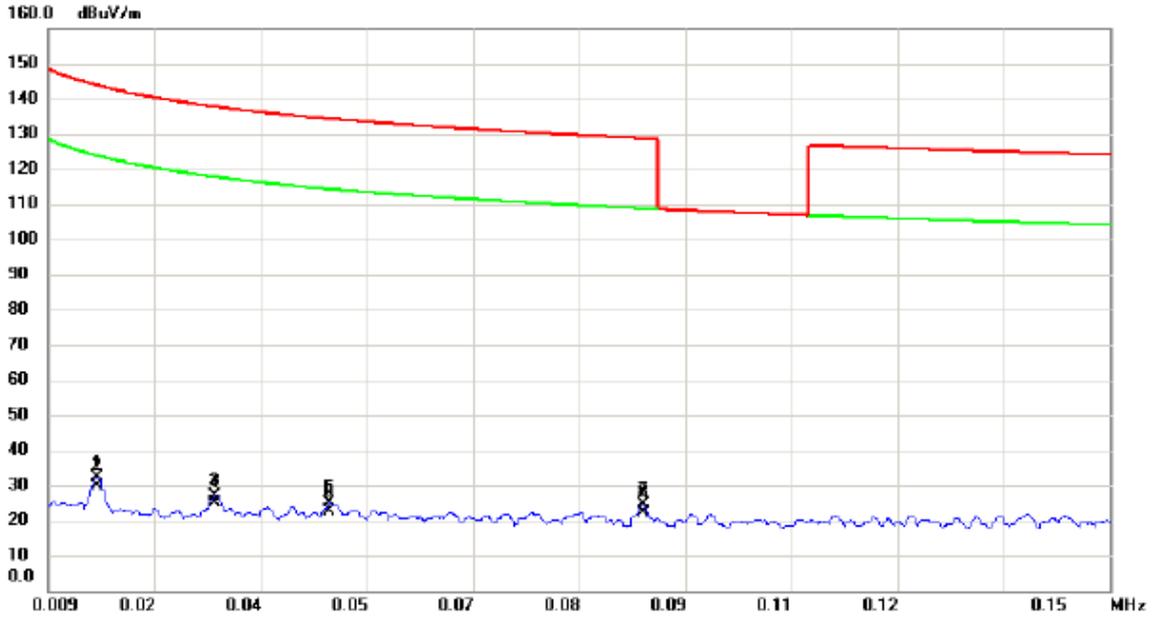


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0155	10.73	21.40	32.13	143.80	-111.67	peak	
2		0.0155	8.54	21.40	29.94	123.80	-93.86	AVG	
3		0.0310	5.58	21.43	27.01	137.78	-110.77	peak	
4		0.0310	3.61	21.43	25.04	117.78	-92.74	AVG	
5		0.0464	3.25	21.58	24.83	134.27	-109.44	peak	
6		0.0464	1.22	21.58	22.80	114.27	-91.47	AVG	
7		0.0880	3.85	20.72	24.57	128.72	-104.15	peak	
8	*	0.0880	1.39	20.72	22.11	108.72	-86.61	AVG	

**Ant90°**

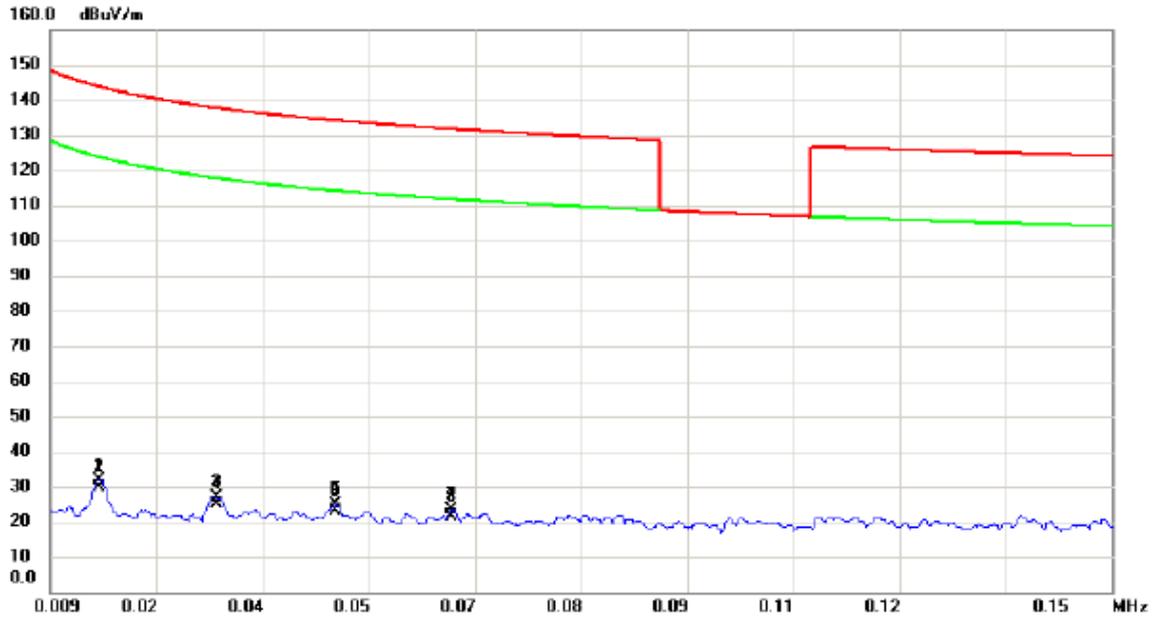


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0155	10.60	21.40	32.00	143.80	-111.80	peak	
2		0.0155	8.37	21.40	29.77	123.80	-94.03	AVG	
3		0.0310	5.46	21.43	26.89	137.78	-110.89	peak	
4		0.0310	3.39	21.43	24.82	117.78	-92.96	AVG	
5		0.0468	3.24	21.59	24.83	134.20	-109.37	peak	
6		0.0468	1.44	21.59	23.03	114.20	-91.17	AVG	
7		0.0623	1.94	21.33	23.27	131.72	-108.45	peak	
8	*	0.0623	0.03	21.33	21.36	111.72	-90.36	AVG	

**Ant0°**

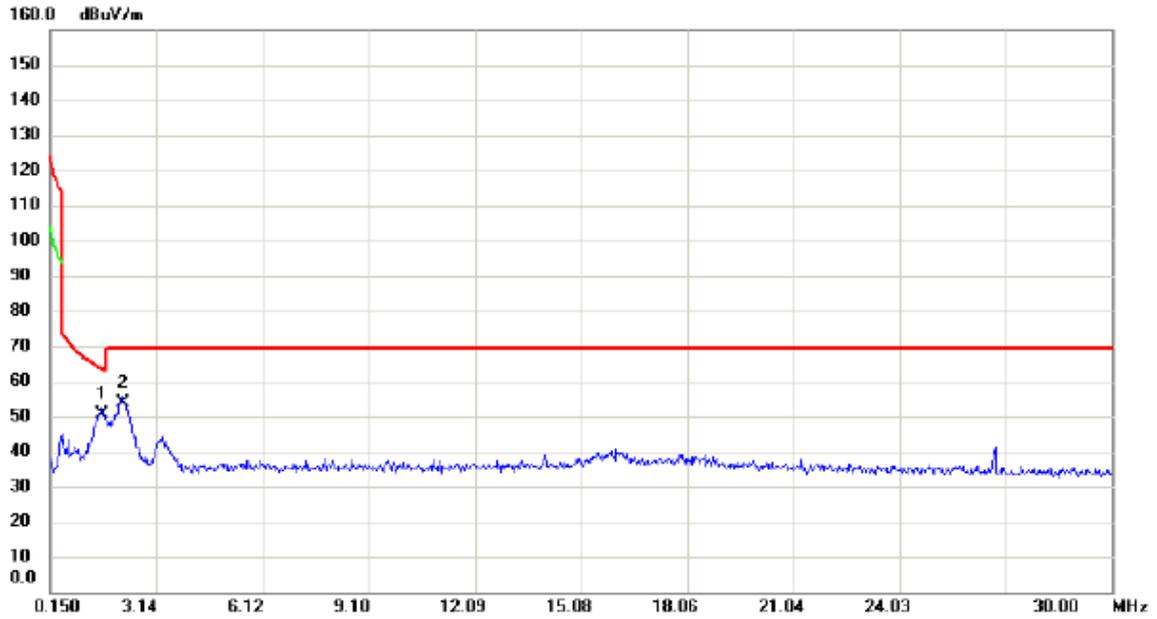

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.6126	29.14	21.59	50.73	63.45	-12.72	QP	
2		2.1798	32.10	21.70	53.80	69.54	-15.74	QP	


**Ant90°**

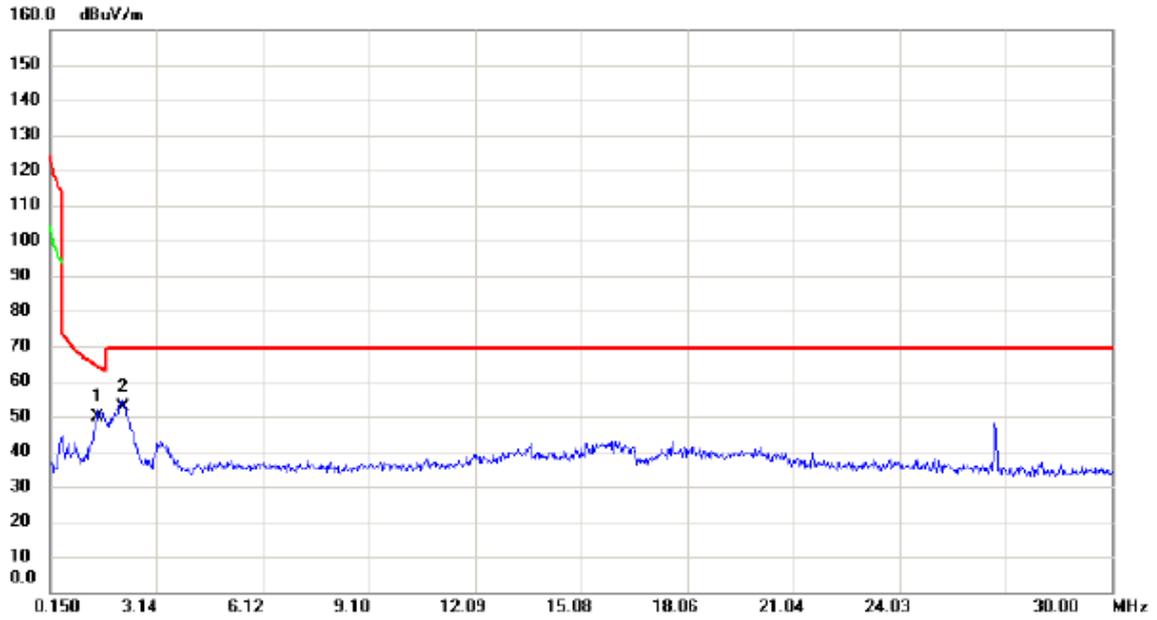

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.4932	28.39	21.59	49.98	64.12	-14.14	QP	
2		2.2096	31.04	21.71	52.75	69.54	-16.79	QP	


Test Mode: TX Mode – Adapter: Huntkey

**Ant0°**

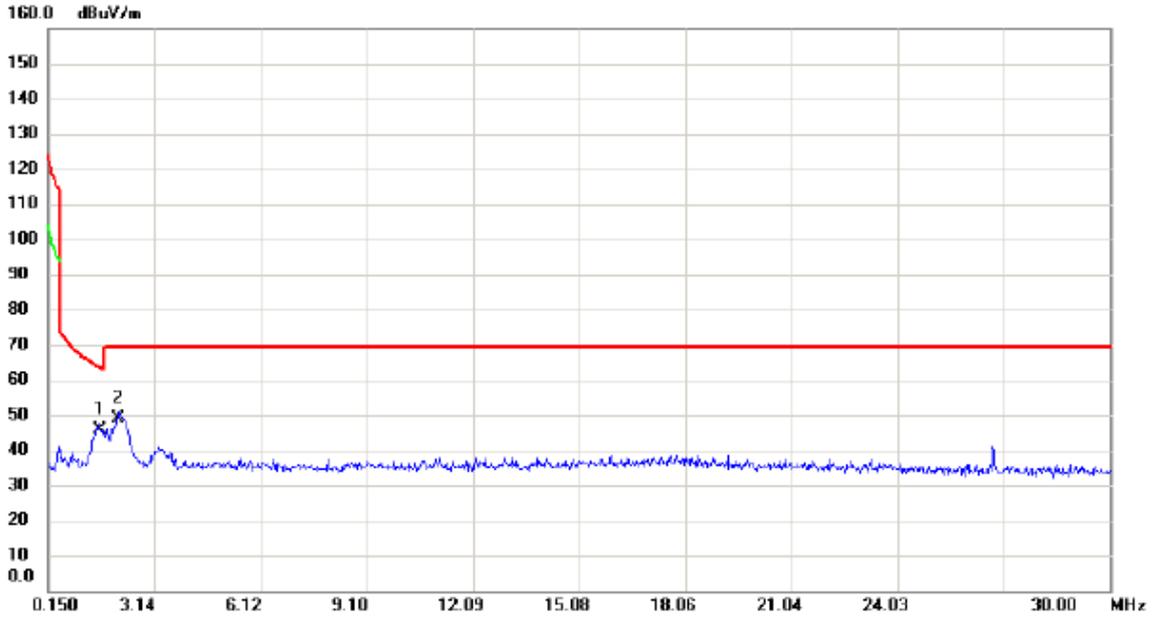


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.5828	24.11	21.59	45.70	63.62	-17.92	QP	
2		2.1201	27.17	21.67	48.84	69.54	-20.70	QP	

**Ant90°**

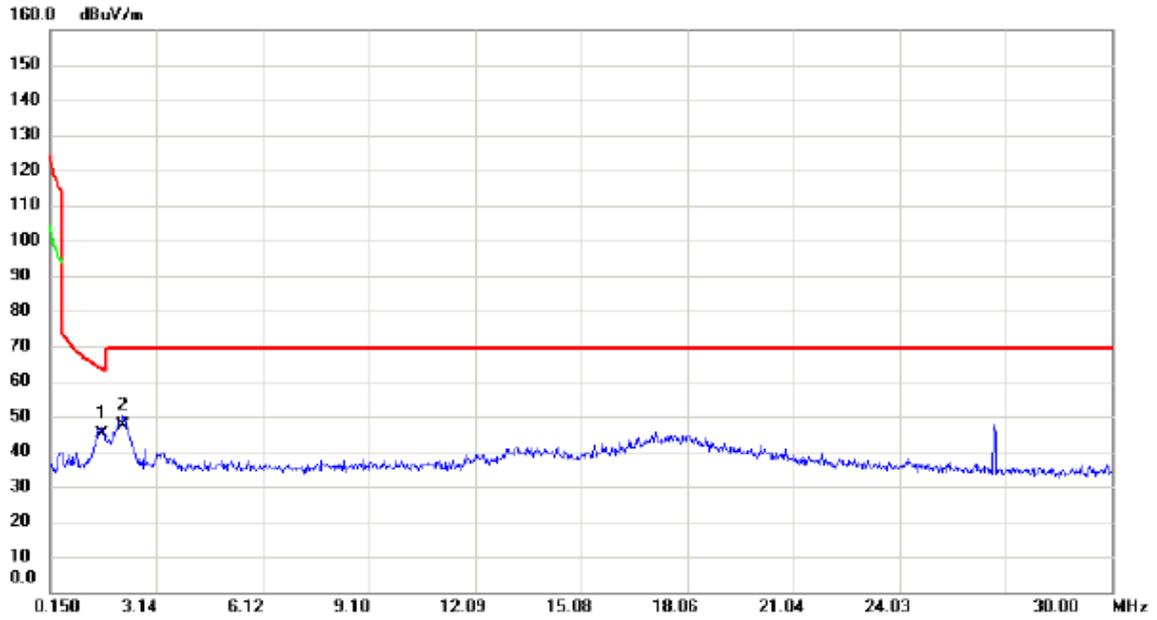


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.5828	23.61	21.59	45.20	63.62	-18.42	QP	
2		2.1798	25.79	21.70	47.49	69.54	-22.05	QP	

Ant0°

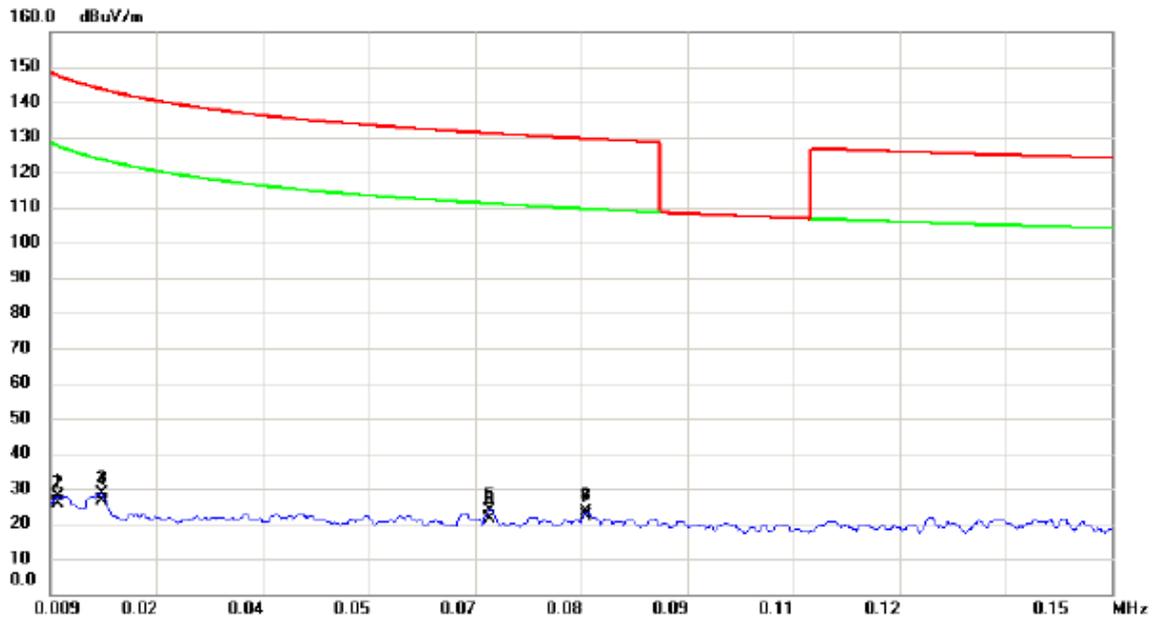

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0100	6.39	21.50	27.89	147.60	-119.71	peak	
2		0.0100	4.27	21.50	25.77	127.60	-101.83	AVG	
3		0.0158	7.06	21.40	28.46	143.63	-115.17	peak	
4		0.0158	5.01	21.40	26.41	123.63	-97.22	AVG	
5		0.0674	2.70	21.21	23.91	131.03	-107.12	peak	
6		0.0674	0.29	21.21	21.50	111.03	-89.53	AVG	
7		0.0802	2.46	20.91	23.37	129.52	-106.15	peak	
8	*	0.0802	1.15	20.91	22.06	109.52	-87.46	AVG	


**Ant90°**

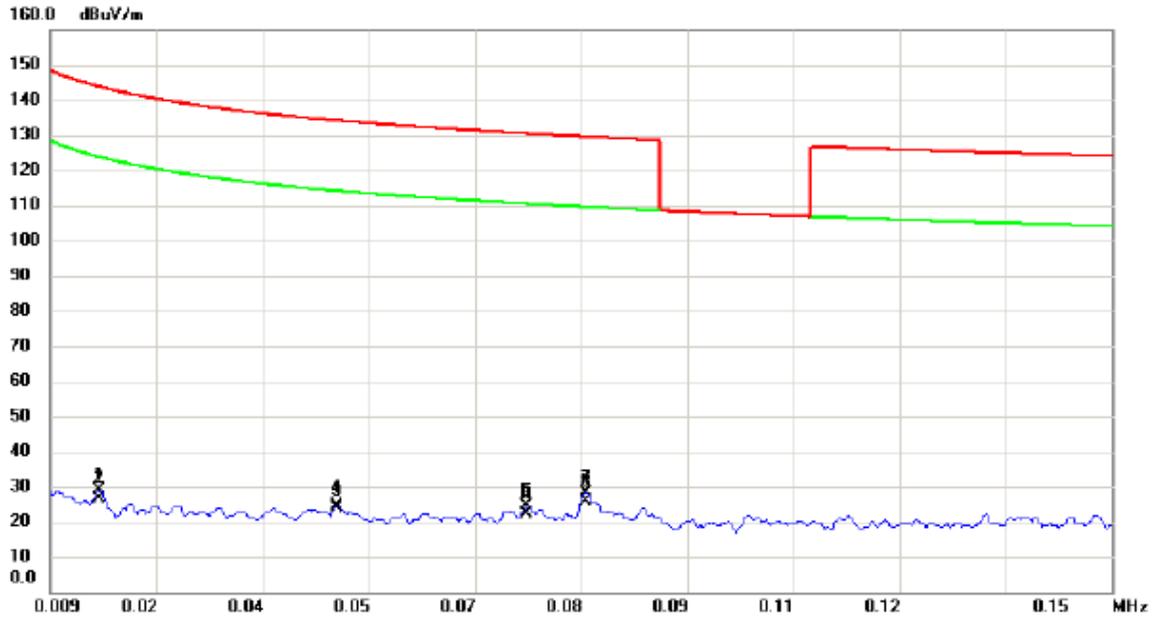

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0155	7.45	21.40	28.85	143.80	-114.95	peak	
2		0.0155	5.14	21.40	26.54	123.80	-97.26	AVG	
3		0.0471	3.08	21.59	24.67	134.14	-109.47	peak	
4		0.0471	2.02	21.59	23.61	114.14	-90.53	AVG	
5		0.0723	3.55	21.09	24.64	130.42	-105.78	peak	
6		0.0723	1.25	21.09	22.34	110.42	-88.08	AVG	
7		0.0801	7.19	20.91	28.10	129.53	-101.43	peak	
8	*	0.0801	5.08	20.91	25.99	109.53	-83.54	AVG	


Test Mode: TX Mode – Adapter: PHITEK

**Ant0°**

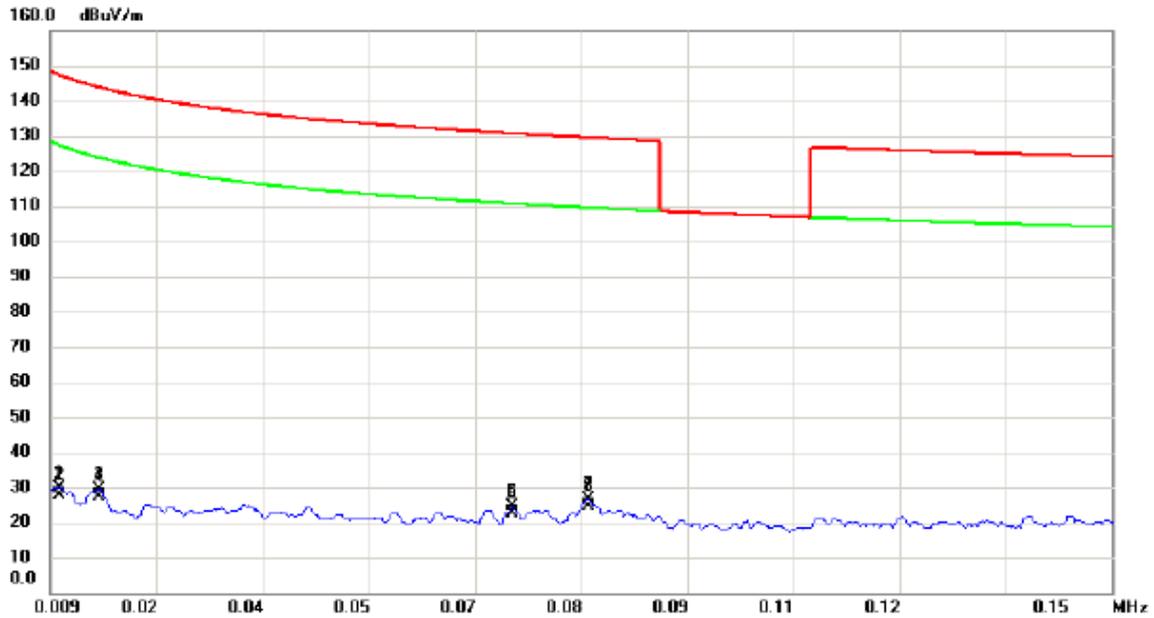


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0103	8.46	21.50	29.96	147.35	-117.39	peak	
2		0.0103	6.28	21.50	27.78	127.35	-99.57	AVG	
3		0.0154	8.08	21.40	29.48	143.85	-114.37	peak	
4		0.0154	6.01	21.40	27.41	123.85	-96.44	AVG	
5		0.0704	3.29	21.14	24.43	130.65	-106.22	peak	
6		0.0704	1.52	21.14	22.66	110.65	-87.99	AVG	
7		0.0805	5.70	20.90	26.60	129.49	-102.89	peak	
8	*	0.0805	3.88	20.90	24.78	109.49	-84.71	AVG	

**Ant90°**

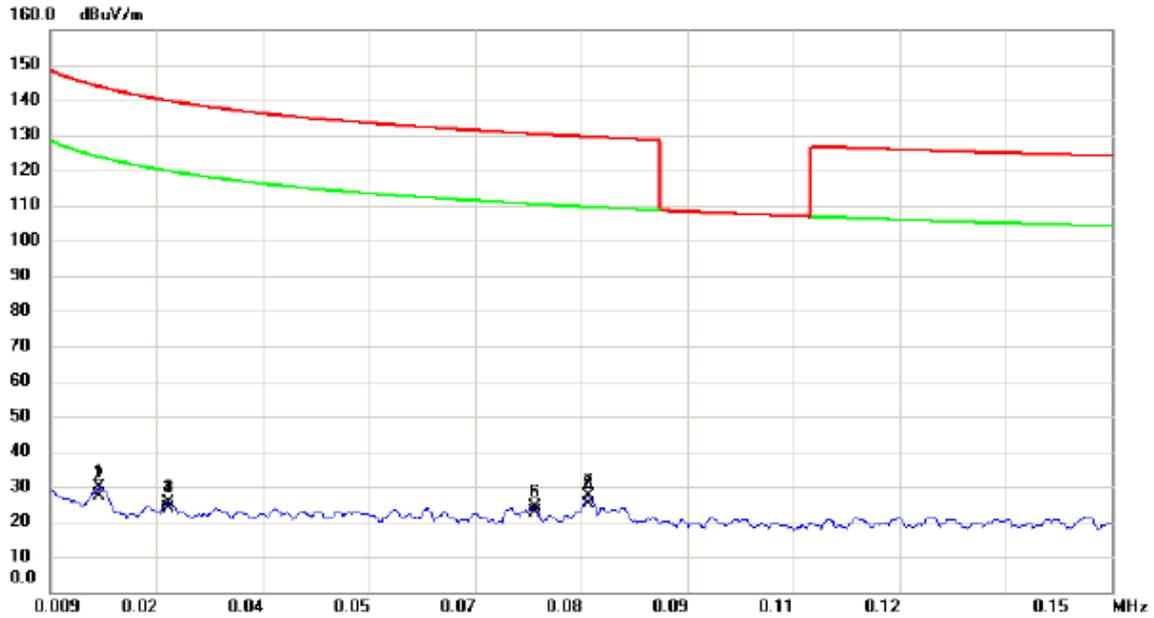


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.0155	8.32	21.40	29.72	143.80	-114.08	peak	
2		0.0155	6.12	21.40	27.52	123.80	-96.28	AVG	
3		0.0247	4.00	21.37	25.37	139.75	-114.38	peak	
4		0.0247	2.31	21.37	23.68	119.75	-96.07	AVG	
5		0.0733	3.13	21.07	24.20	130.30	-106.10	peak	
6		0.0733	1.46	21.07	22.53	110.30	-87.77	AVG	
7		0.0806	6.64	20.90	27.54	129.48	-101.94	peak	
8	*	0.0806	4.24	20.90	25.14	109.48	-84.34	AVG	

Ant0°

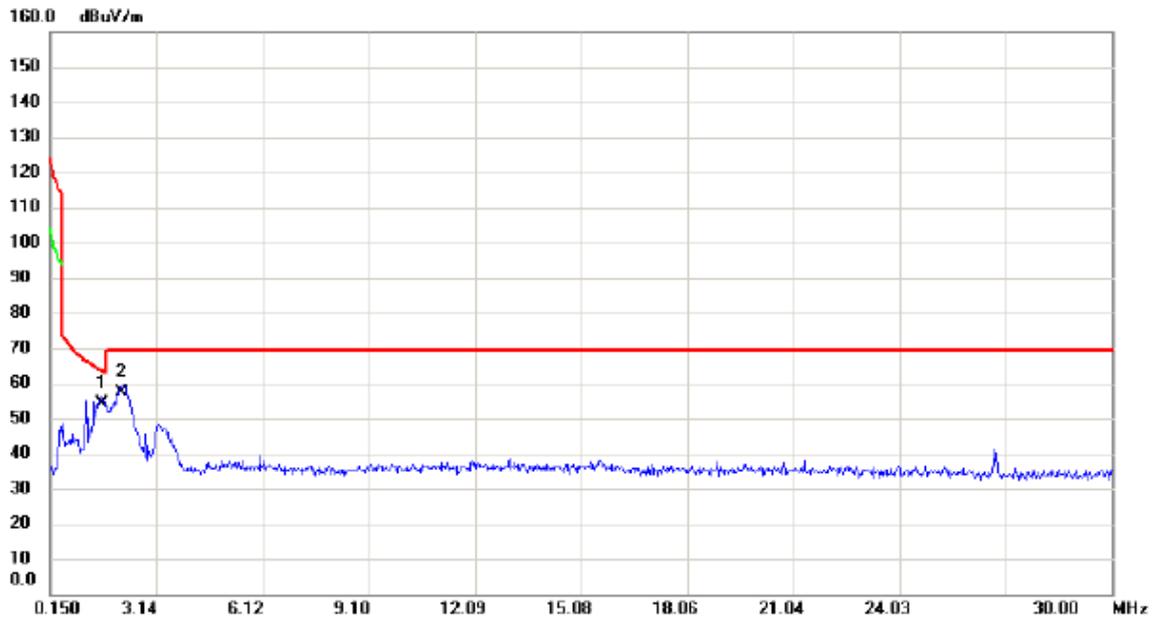

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.5828	32.42	21.59	54.01	63.62	-9.61	QP	
2		2.1500	35.87	21.68	57.55	69.54	-11.99	QP	

**Ant90°**

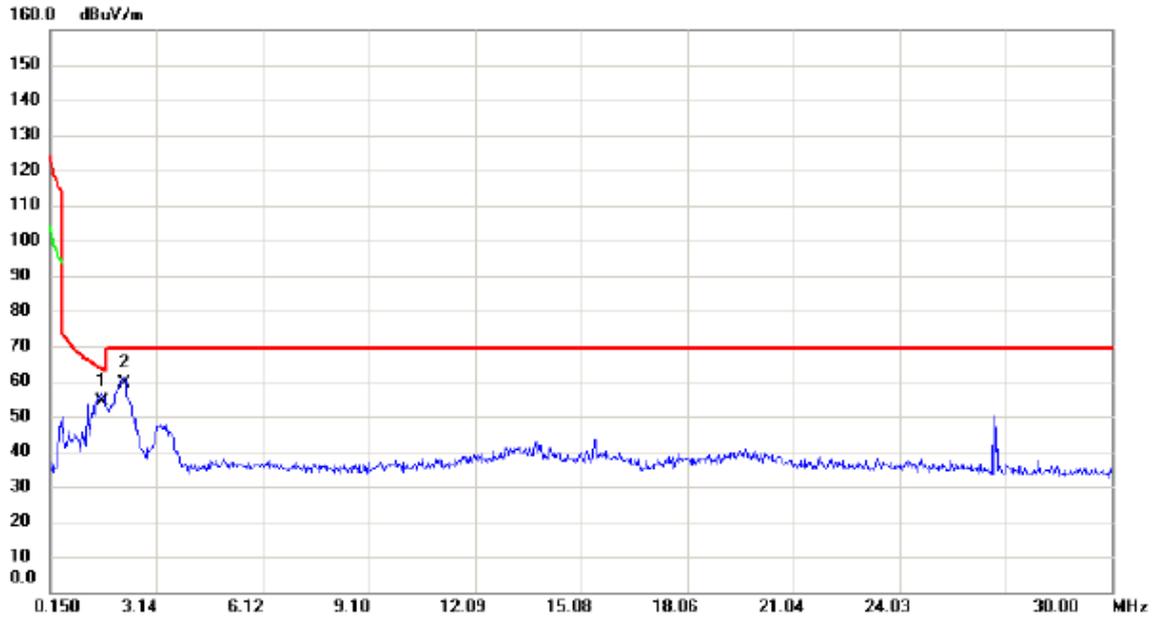


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.6126	32.72	21.59	54.31	63.45	-9.14	QP	
2		2.2395	37.50	21.73	59.23	69.54	-10.31	QP	

**ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Mode: UNII-1/TX A Mode 5180MHz – Adapter: BYD


**Vertical**

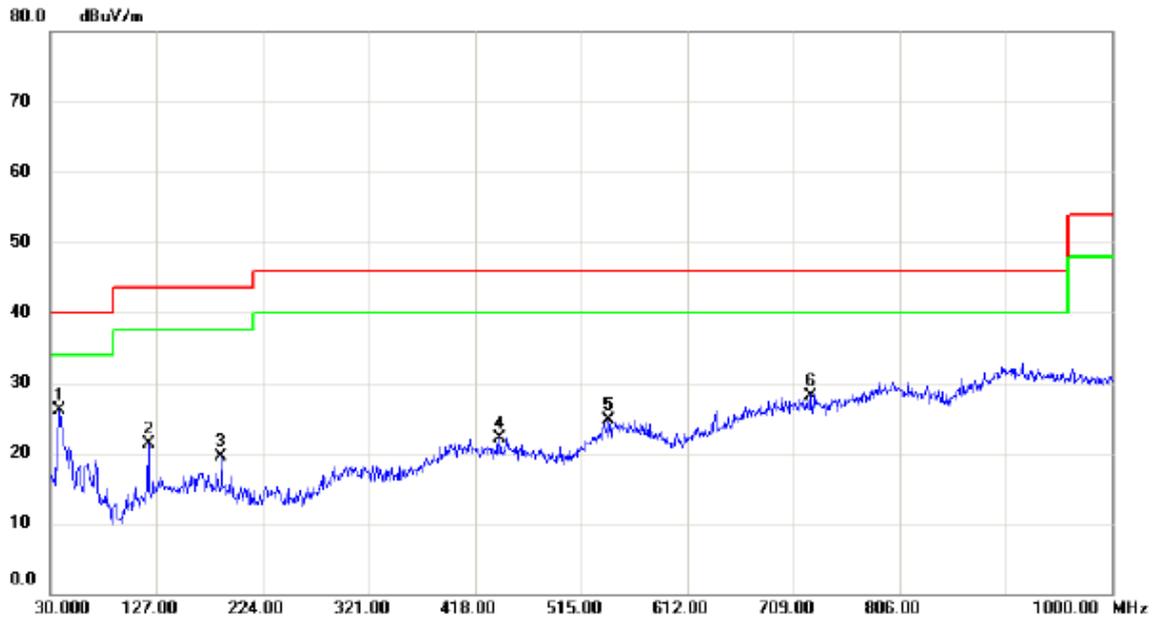

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	40.10	-14.09	26.01	40.00	-13.99	peak	
2		119.2400	34.79	-13.54	21.25	43.50	-22.25	peak	
3		186.1700	33.12	-13.52	19.60	43.50	-23.90	peak	
4		440.3100	30.12	-7.95	22.17	46.00	-23.83	peak	
5		540.2200	30.27	-5.55	24.72	46.00	-21.28	peak	
6		724.5200	30.24	-2.04	28.20	46.00	-17.80	peak	

Test Mode: UNII-1/TX A Mode 5180MHz – Adapter: BYD


### Horizontal

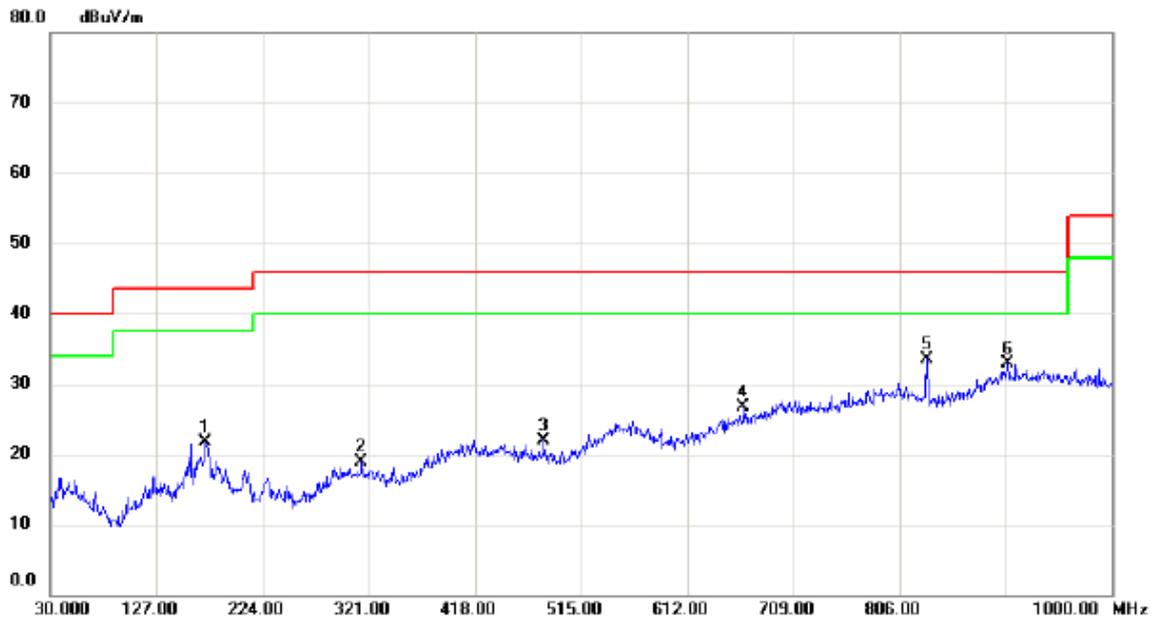

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		171.6200	34.00	-12.33	21.67	43.50	-21.83	peak	
2		314.2100	29.27	-10.46	18.81	46.00	-27.19	peak	
3		481.0500	30.88	-9.07	21.81	46.00	-24.19	peak	
4		663.4100	30.29	-3.63	26.66	46.00	-19.34	peak	
5	*	831.2200	34.24	-0.69	33.55	46.00	-12.45	peak	
6		904.9400	30.37	2.62	32.99	46.00	-13.01	peak	

Test Mode: UNII-1/TX A Mode 5240MHz – Adapter: BYD


Vertical

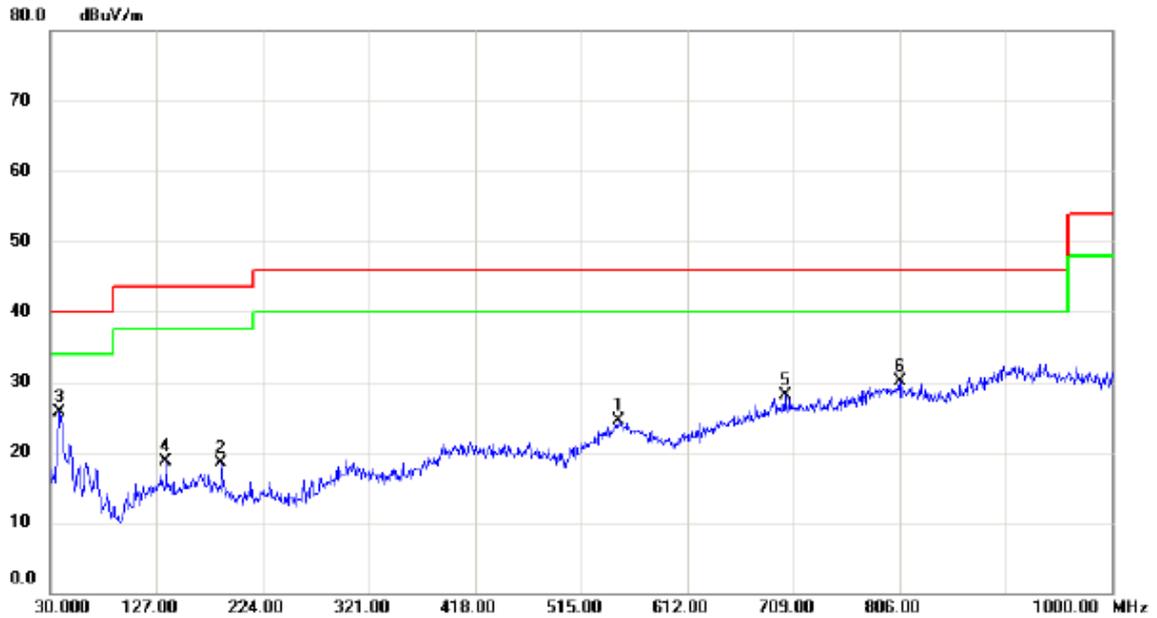

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		548.9500	29.16	-4.64	24.52	46.00	-21.48	peak	
2		186.1700	31.97	-13.52	18.45	43.50	-25.05	peak	
3	*	37.7600	39.89	-14.09	25.80	40.00	-14.20	peak	
4		135.7300	31.94	-13.16	18.78	43.50	-24.72	peak	
5		701.2400	30.25	-2.09	28.16	46.00	-17.84	peak	
6		806.0000	30.02	0.07	30.09	46.00	-15.91	peak	

Test Mode: UNII-1/TX A Mode 5240MHz – Adapter: BYD


### Horizontal

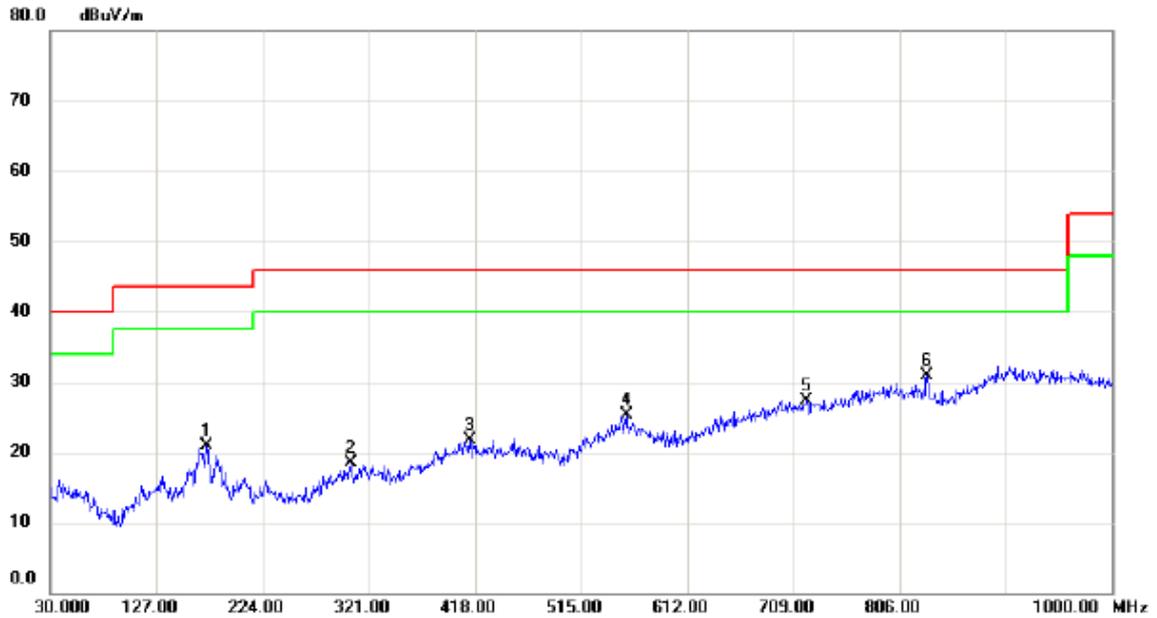

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		172.5900	33.21	-12.40	20.81	43.50	-22.69	peak	
2		304.5100	28.80	-10.25	18.55	46.00	-27.45	peak	
3		413.1500	29.53	-7.83	21.70	46.00	-24.30	peak	
4		556.7100	30.23	-4.88	25.35	46.00	-20.65	peak	
5		721.6100	29.29	-2.05	27.24	46.00	-18.76	peak	
6	*	831.2200	31.60	-0.69	30.91	46.00	-15.09	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz – Adapter: BYD


Vertical

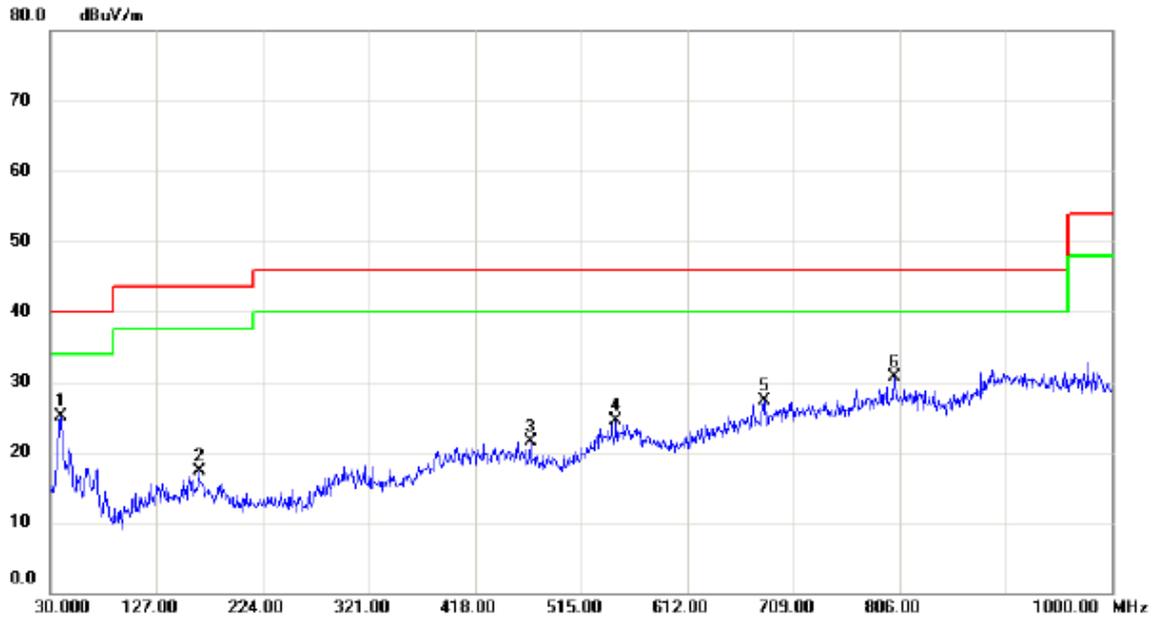

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	39.15	-13.95	25.20	40.00	-14.80	peak	
2		165.8000	29.45	-12.21	17.24	43.50	-26.26	peak	
3		468.4400	30.18	-8.64	21.54	46.00	-24.46	peak	
4		547.0100	29.30	-4.85	24.45	46.00	-21.55	peak	
5		682.8100	30.19	-2.81	27.38	46.00	-18.62	peak	
6		801.1500	30.45	0.23	30.68	46.00	-15.32	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz – Adapter: BYD


### Horizontal

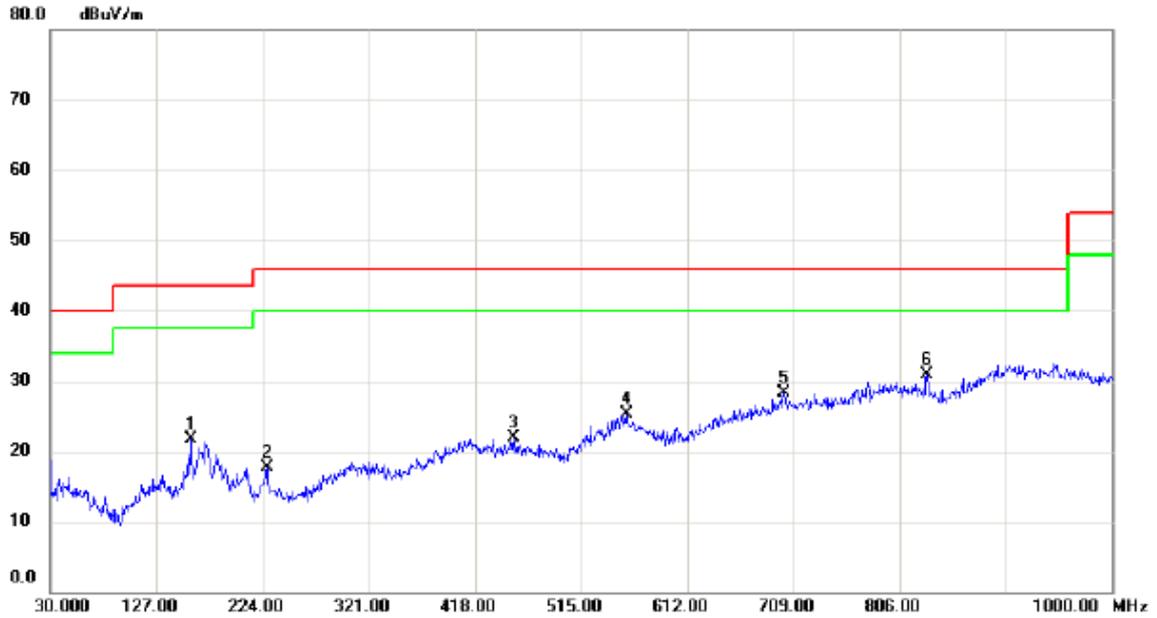

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		158.0400	33.93	-12.31	21.62	43.50	-21.88	peak	
2		227.8800	31.29	-13.55	17.74	46.00	-28.26	peak	
3		452.9200	30.02	-8.10	21.92	46.00	-24.08	peak	
4		556.7100	30.23	-4.88	25.35	46.00	-20.65	peak	
5		700.2700	30.42	-2.10	28.32	46.00	-17.68	peak	
6	*	831.2200	31.60	-0.69	30.91	46.00	-15.09	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz – Adapter: BYD


Vertical

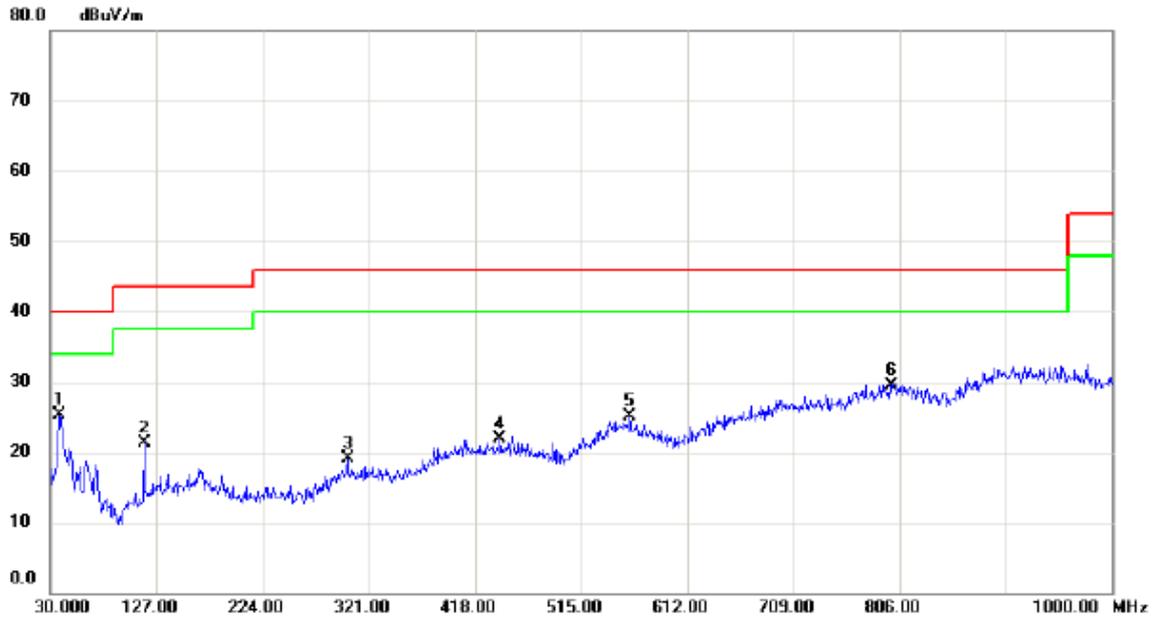

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	39.32	-14.09	25.23	40.00	-14.77	peak	
2		115.3600	35.33	-14.01	21.32	43.50	-22.18	peak	
3		301.6000	29.35	-10.19	19.16	46.00	-26.84	peak	
4		440.3100	29.80	-7.95	21.85	46.00	-24.15	peak	
5		559.6200	30.18	-5.03	25.15	46.00	-20.85	peak	
6		799.2100	29.29	0.23	29.52	46.00	-16.48	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz – Adapter: BYD


### Horizontal

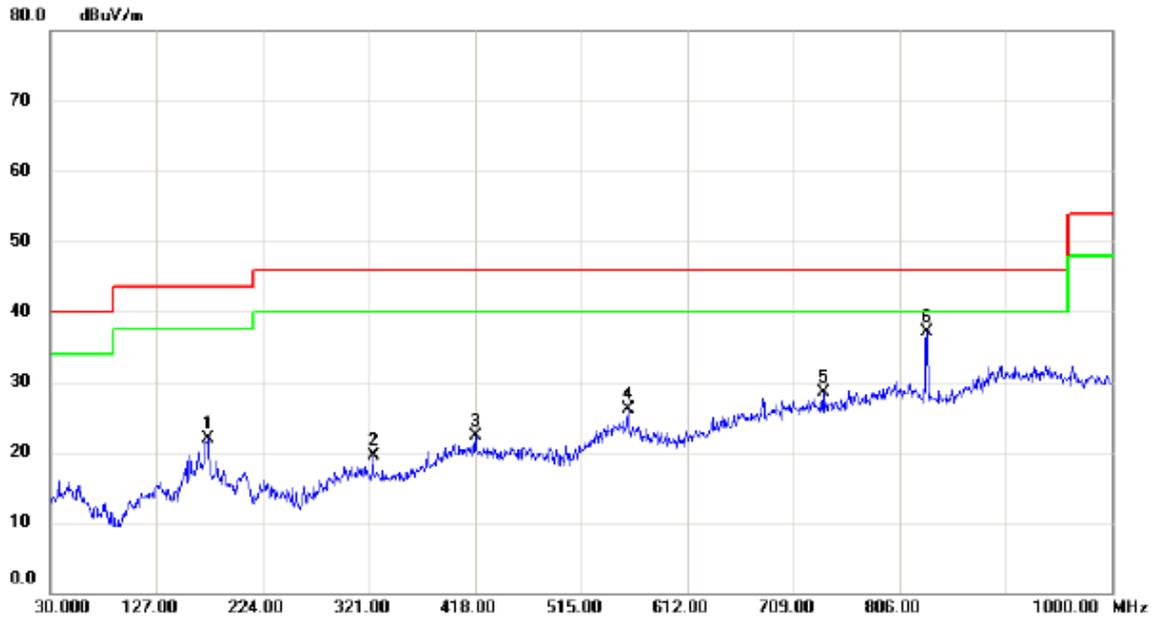

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		173.5600	34.36	-12.46	21.90	43.50	-21.60	peak	
2		324.8800	30.14	-10.69	19.45	46.00	-26.55	peak	
3		418.0000	30.23	-7.85	22.38	46.00	-23.62	peak	
4		558.6500	31.02	-4.98	26.04	46.00	-19.96	peak	
5		736.1600	30.46	-2.00	28.46	46.00	-17.54	peak	
6	*	831.2200	37.75	-0.69	37.06	46.00	-8.94	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz – Adapter: BYD


Vertical

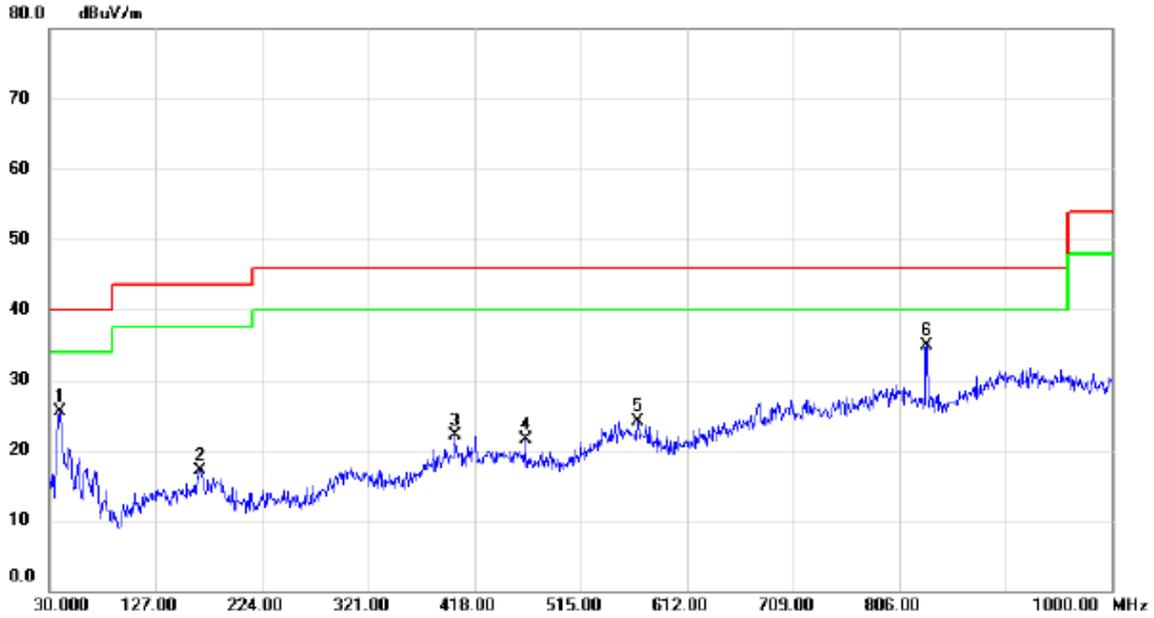

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	39.52	-13.95	25.57	40.00	-14.43	peak	
2		167.7400	29.27	-12.22	17.05	43.50	-26.45	peak	
3		400.5400	29.84	-7.78	22.06	46.00	-23.94	peak	
4		464.5600	30.08	-8.51	21.57	46.00	-24.43	peak	
5		567.3800	29.56	-5.42	24.14	46.00	-21.86	peak	
6	*	831.2200	35.53	-0.69	34.84	46.00	-11.16	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz – Adapter: BYD


### Horizontal

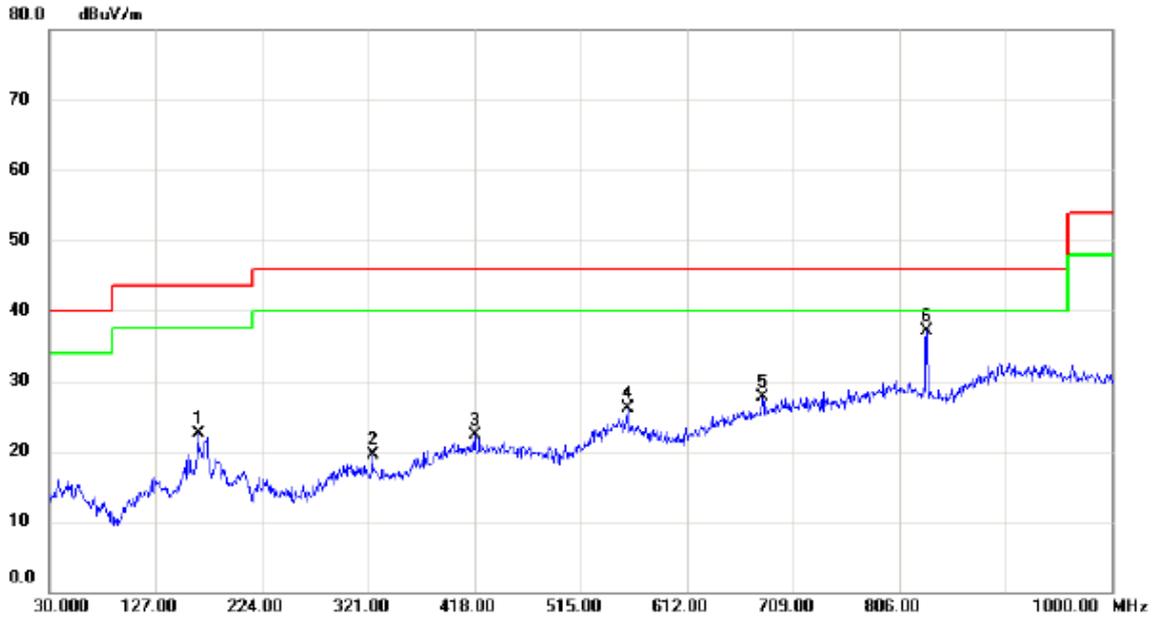

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		165.8000	34.63	-12.21	22.42	43.50	-21.08	peak	
2		324.8800	30.14	-10.69	19.45	46.00	-26.55	peak	
3		418.0000	30.23	-7.85	22.38	46.00	-23.62	peak	
4		558.6500	31.02	-4.98	26.04	46.00	-19.96	peak	
5		680.8700	30.50	-2.89	27.61	46.00	-18.39	peak	
6	*	831.2200	37.75	-0.69	37.06	46.00	-8.94	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz – Adapter: BYD


**Vertical**

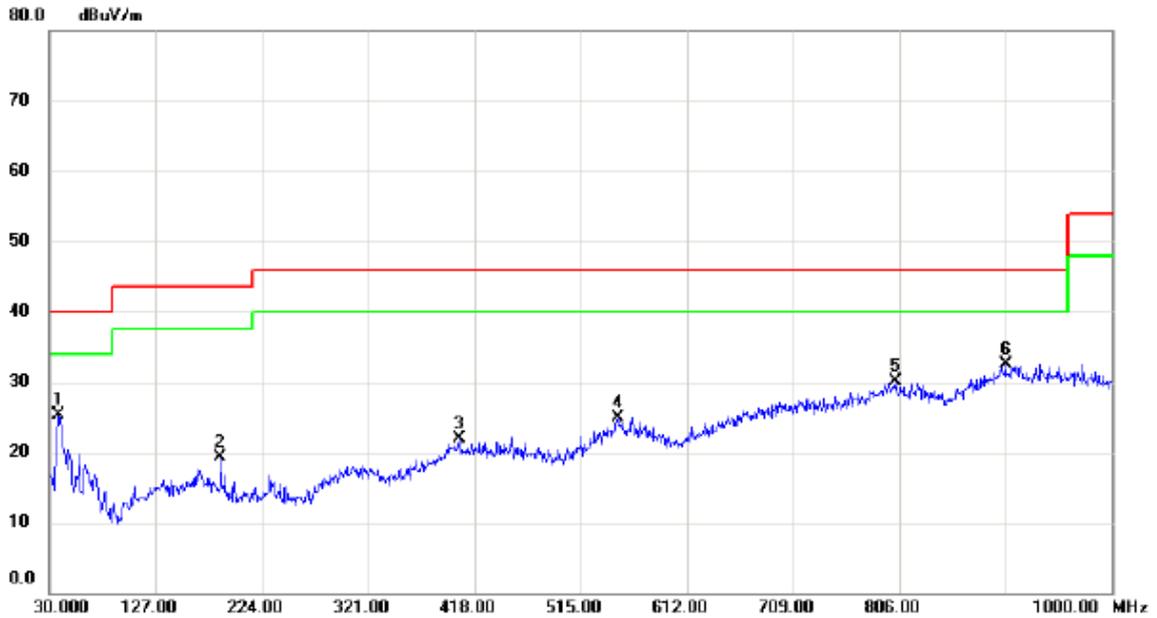

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	39.46	-14.09	25.37	40.00	-14.63	peak	
2		186.1700	32.79	-13.52	19.27	43.50	-24.23	peak	
3		404.4200	29.66	-7.80	21.86	46.00	-24.14	peak	
4		548.9500	29.59	-4.64	24.95	46.00	-21.05	peak	
5		803.0900	29.87	0.17	30.04	46.00	-15.96	peak	
6	*	903.0000	29.94	2.63	32.57	46.00	-13.43	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz – Adapter: BYD


### Horizontal

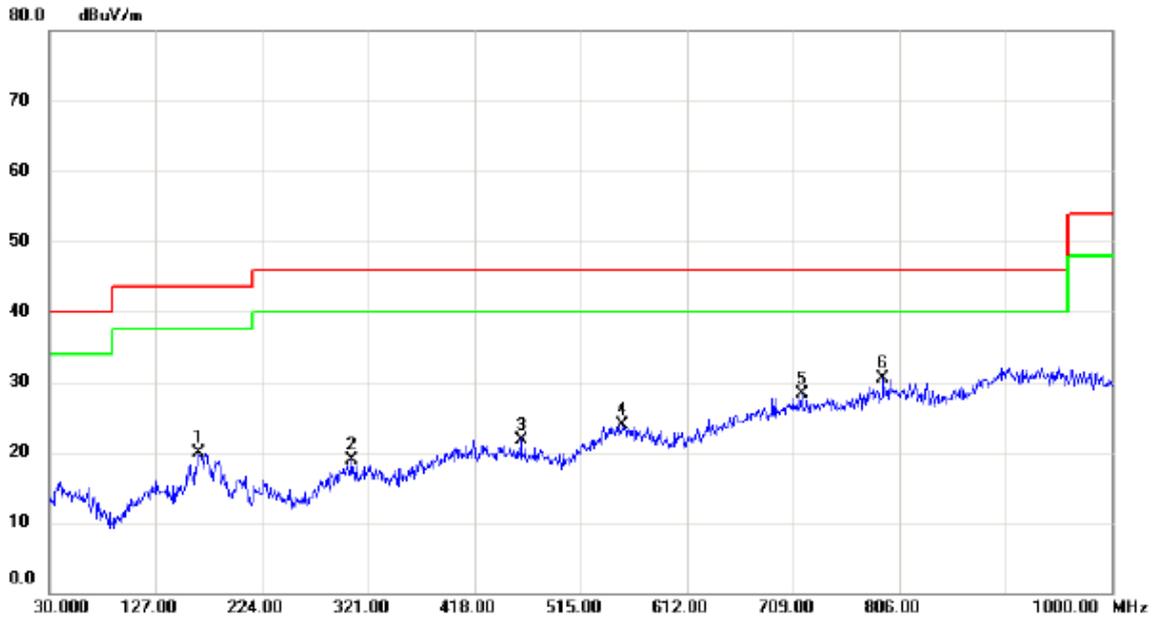

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		166.7700	32.20	-12.21	19.99	43.50	-23.51	peak	
2		305.4800	29.24	-10.28	18.96	46.00	-27.04	peak	
3		460.6800	30.16	-8.36	21.80	46.00	-24.20	peak	
4		553.8000	28.62	-4.73	23.89	46.00	-22.11	peak	
5		716.7600	30.27	-2.06	28.21	46.00	-17.79	peak	
6	*	791.4500	30.65	-0.11	30.54	46.00	-15.46	peak	

Test Mode: UNII-3/TX A Mode 5745MHz – Adapter: BYD


**Vertical**

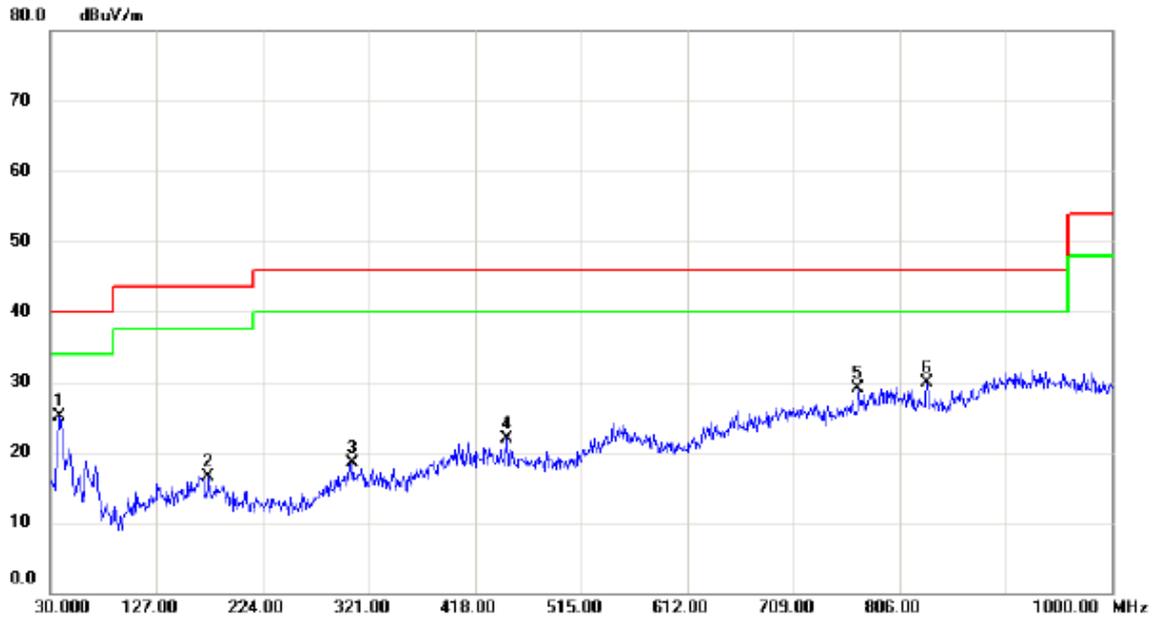

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	39.20	-14.09	25.11	40.00	-14.89	peak	
2		174.5300	29.01	-12.51	16.50	43.50	-27.00	peak	
3		306.4500	28.89	-10.30	18.59	46.00	-27.41	peak	
4		447.1000	29.97	-7.99	21.98	46.00	-24.02	peak	
5		768.1700	30.19	-1.16	29.03	46.00	-16.97	peak	
6		831.2200	30.65	-0.69	29.96	46.00	-16.04	peak	

Test Mode: UNII-3/TX A Mode 5745MHz – Adapter: BYD


### Horizontal

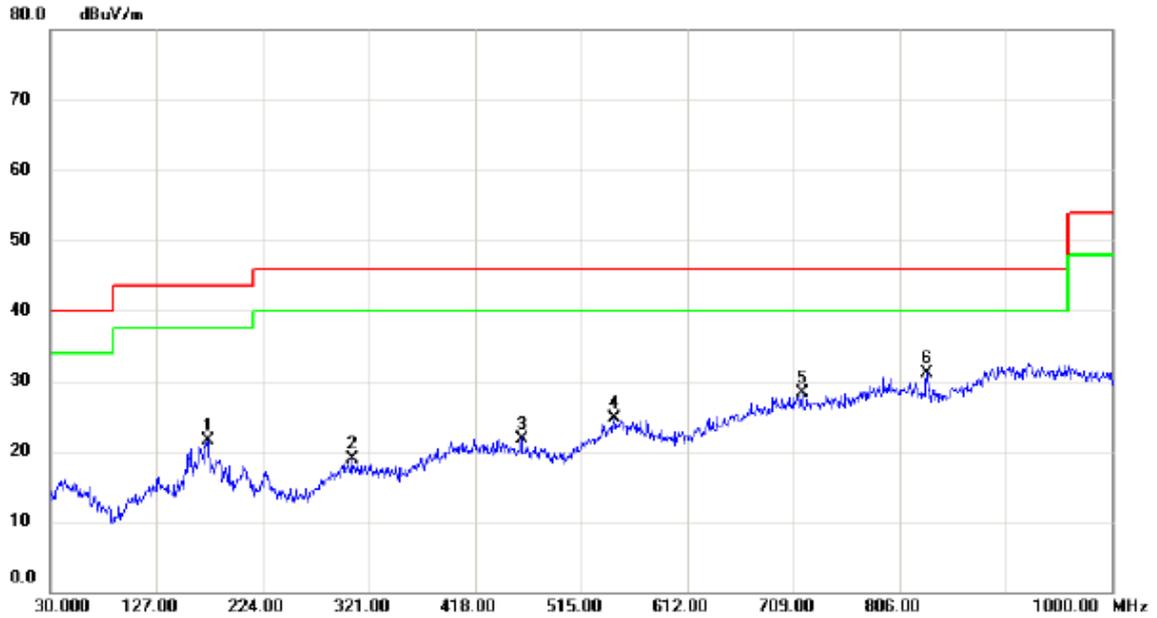

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		173.5600	33.94	-12.46	21.48	43.50	-22.02	peak	
2		305.4800	29.24	-10.28	18.96	46.00	-27.04	peak	
3		460.6800	30.16	-8.36	21.80	46.00	-24.20	peak	
4		545.0700	29.81	-5.04	24.77	46.00	-21.23	peak	
5		716.7600	30.27	-2.06	28.21	46.00	-17.79	peak	
6	*	831.2200	31.89	-0.69	31.20	46.00	-14.80	peak	

Test Mode: UNII-3/TX A Mode 5825MHz – Adapter: BYD

Vertical

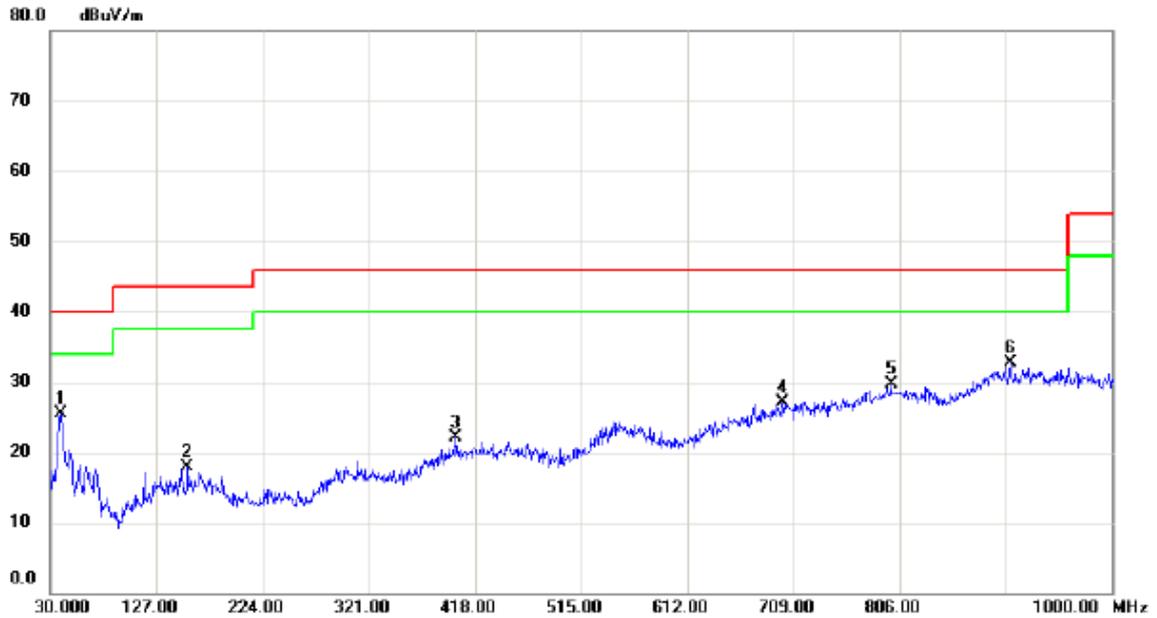

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	39.40	-13.95	25.45	40.00	-14.55	peak	
2		155.1300	30.37	-12.54	17.83	43.50	-25.67	peak	
3		400.5400	29.91	-7.78	22.13	46.00	-23.87	peak	
4		699.3000	29.18	-2.13	27.05	46.00	-18.95	peak	
5		798.2400	29.62	0.18	29.80	46.00	-16.20	peak	
6	*	906.8800	30.15	2.62	32.77	46.00	-13.23	peak	

Test Mode: UNII-3/TX A Mode 5825MHz – Adapter: BYD

**Horizontal**



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		165.8000	32.89	-12.21	20.68	43.50	-22.82	peak	
2		312.2700	28.99	-10.42	18.57	46.00	-27.43	peak	
3		425.7600	30.40	-7.89	22.51	46.00	-23.49	peak	
4		554.7700	29.49	-4.79	24.70	46.00	-21.30	peak	
5		700.2700	30.51	-2.10	28.41	46.00	-17.59	peak	
6	*	831.2200	32.45	-0.69	31.76	46.00	-14.24	peak	

Test Mode: UNII-1/TX A Mode 5180MHz – Adapter: Huntkey

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	41.38	-14.09	27.29	40.00	-12.71	peak	
2		167.7400	31.68	-12.22	19.46	43.50	-24.04	peak	
3		217.2100	33.42	-14.36	19.06	46.00	-26.94	peak	
4		379.2000	30.39	-9.21	21.18	46.00	-24.82	peak	
5		558.6500	30.44	-4.98	25.46	46.00	-20.54	peak	
6	*	830.2500	34.96	-0.66	34.30	46.00	-11.70	peak	

Test Mode: UNII-1/TX A Mode 5180MHz – Adapter: Huntkey

### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	32.54	-14.09	18.45	40.00	-21.55	peak	
2		165.8000	34.57	-12.21	22.36	43.50	-21.14	peak	
3		223.0300	34.37	-13.99	20.38	46.00	-25.62	peak	
4		428.6700	29.95	-7.90	22.05	46.00	-23.95	peak	
5		557.6800	29.57	-4.92	24.65	46.00	-21.35	peak	
6	*	813.7600	30.50	-0.16	30.34	46.00	-15.66	peak	

Test Mode: UNII-1/TX A Mode 5240MHz – Adapter: Huntkey

**Vertical**



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	42.30	-14.09	28.21	40.00	-11.79	peak	
2		75.5900	36.69	-16.52	20.17	40.00	-19.83	peak	
3	*	142.5200	47.28	-13.55	33.73	43.50	-9.77	peak	
4		304.5100	29.22	-10.25	18.97	46.00	-27.03	peak	
5		561.5600	29.74	-5.12	24.62	46.00	-21.38	peak	
6		816.6700	30.28	-0.24	30.04	46.00	-15.96	peak	

Test Mode: UNII-1/TX A Mode 5240MHz – Adapter: Huntkey


**Horizontal**



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		166.7700	34.04	-12.21	21.83	43.50	-21.67	peak	
2		228.8500	35.59	-13.47	22.12	46.00	-23.88	peak	
3		299.6600	29.79	-10.19	19.60	46.00	-26.40	peak	
4		403.4500	29.82	-7.79	22.03	46.00	-23.97	peak	
5		552.8300	29.93	-4.68	25.25	46.00	-20.75	peak	
6	*	901.0600	30.38	2.64	33.02	46.00	-12.98	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz – Adapter: Huntkey


Vertical

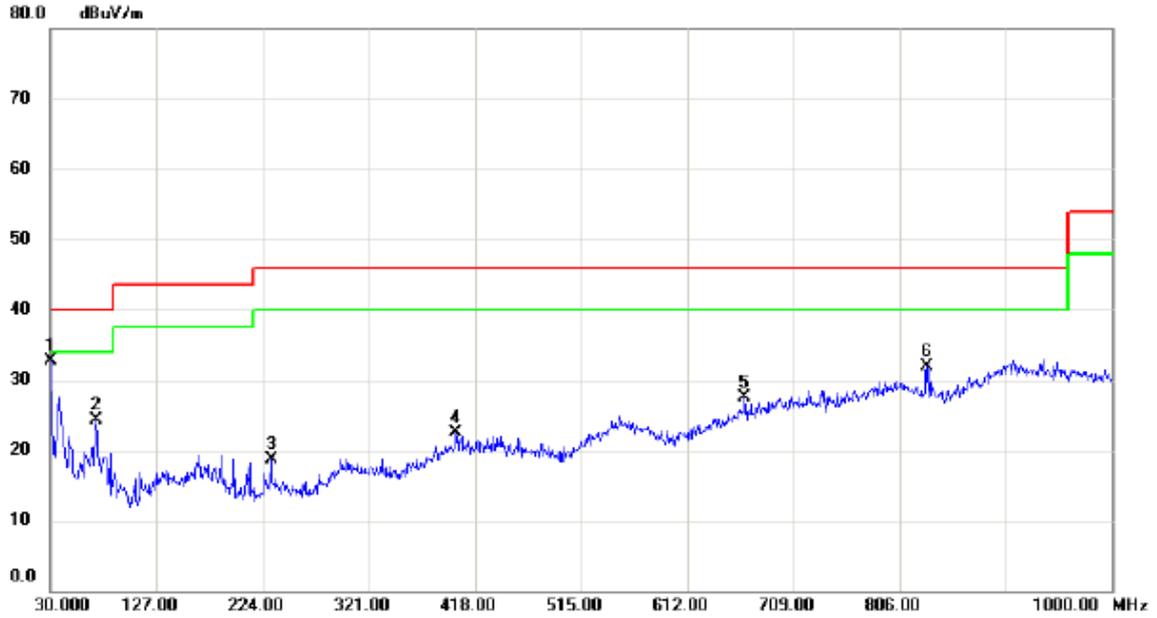

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.9700	46.82	-14.12	32.70	40.00	-7.30	peak	
2		71.7100	40.85	-16.54	24.31	40.00	-15.69	peak	
3		231.7600	32.20	-13.45	18.75	46.00	-27.25	peak	
4		400.5400	30.23	-7.78	22.45	46.00	-23.55	peak	
5		664.3800	31.14	-3.58	27.56	46.00	-18.44	peak	
6		831.2200	32.65	-0.69	31.96	46.00	-14.04	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz – Adapter: Huntkey

**Horizontal**

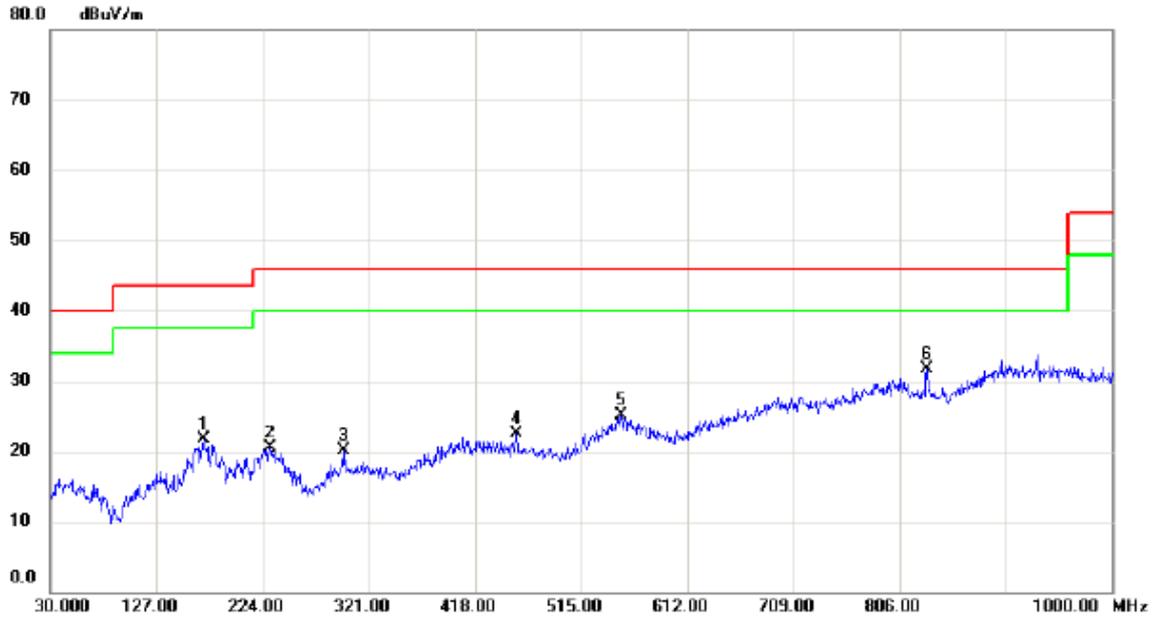

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		170.6500	34.02	-12.29	21.73	43.50	-21.77	peak	
2		230.7900	33.98	-13.40	20.58	46.00	-25.42	peak	
3		297.7200	30.55	-10.41	20.14	46.00	-25.86	peak	
4		455.8300	30.63	-8.20	22.43	46.00	-23.57	peak	
5		551.8600	29.80	-4.63	25.17	46.00	-20.83	peak	
6	*	831.2200	32.37	-0.69	31.68	46.00	-14.32	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz – Adapter: Huntkey


**Vertical**



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	41.39	-14.09	27.30	40.00	-12.70	peak	
2		134.7600	32.31	-13.01	19.30	43.50	-24.20	peak	
3		203.6300	39.09	-14.51	24.58	43.50	-18.92	peak	
4		400.5400	29.92	-7.78	22.14	46.00	-23.86	peak	
5		431.5800	30.00	-7.92	22.08	46.00	-23.92	peak	
6		795.3300	30.22	0.05	30.27	46.00	-15.73	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz – Adapter: Huntkey


### Horizontal

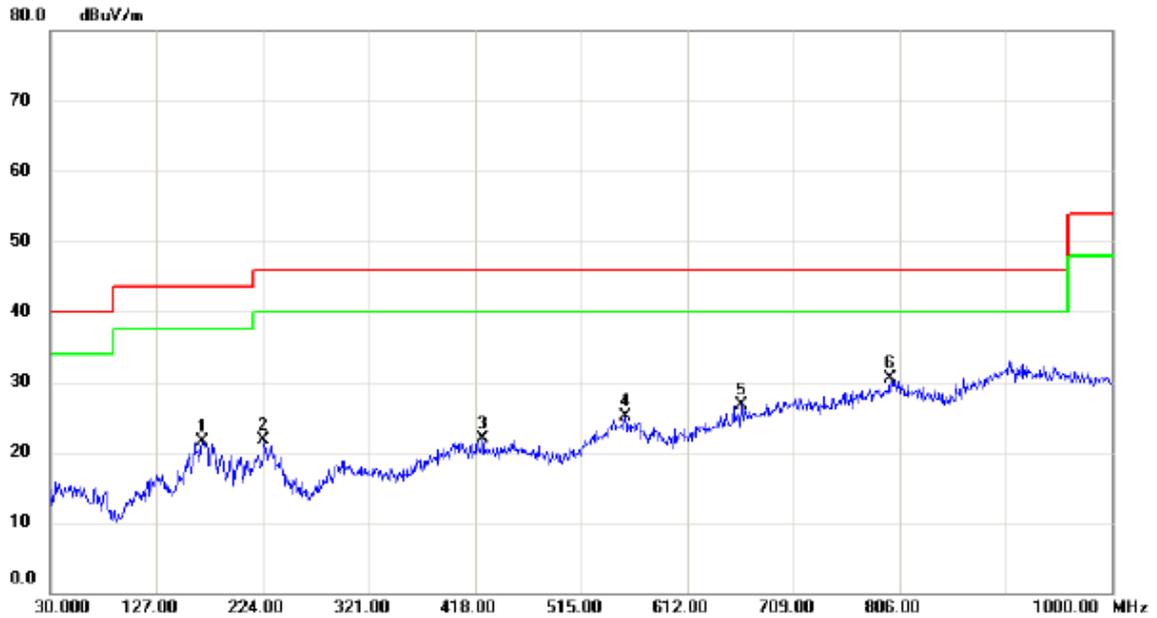

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		168.7100	33.82	-12.23	21.59	43.50	-21.91	peak	
2		224.9700	35.45	-13.81	21.64	46.00	-24.36	peak	
3		424.7900	29.75	-7.89	21.86	46.00	-24.14	peak	
4		555.7400	29.88	-4.83	25.05	46.00	-20.95	peak	
5		661.4700	30.32	-3.71	26.61	46.00	-19.39	peak	
6	*	797.2700	30.36	0.15	30.51	46.00	-15.49	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz – Adapter: Huntkey


**Vertical**

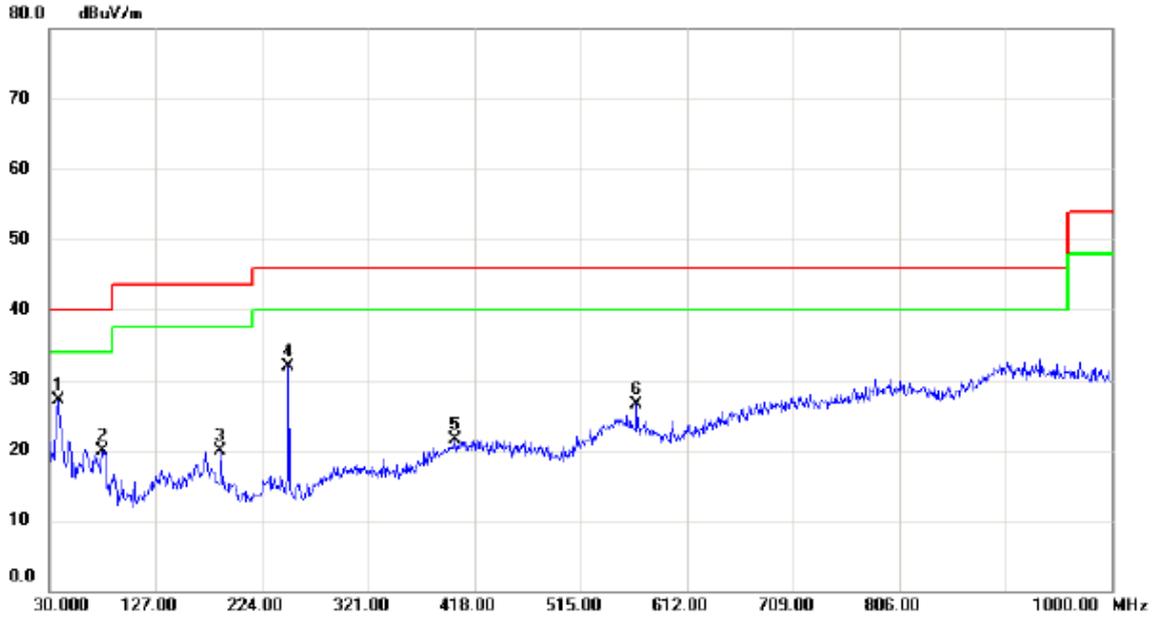

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	41.23	-14.09	27.14	40.00	-12.86	peak	
2		78.5000	36.14	-16.21	19.93	40.00	-20.07	peak	
3		186.1700	33.47	-13.52	19.95	43.50	-23.55	peak	
4		248.2500	45.99	-14.12	31.87	46.00	-14.13	peak	
5		400.5400	29.36	-7.78	21.58	46.00	-24.42	peak	
6		566.4100	31.84	-5.37	26.47	46.00	-19.53	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz – Adapter: Huntkey


**Horizontal**

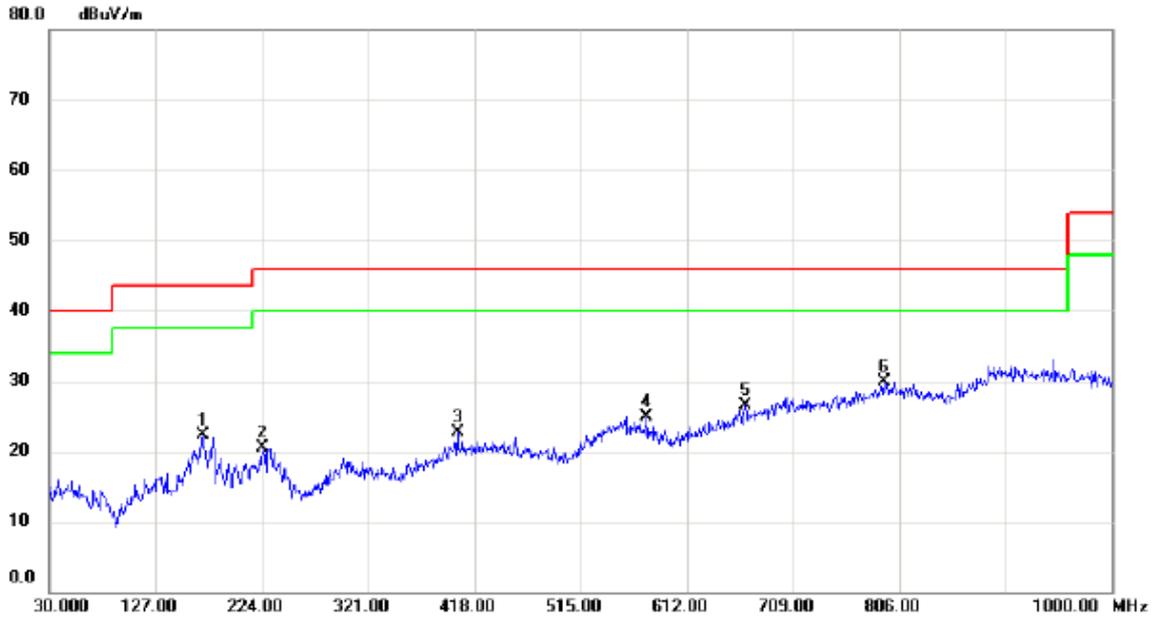

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		169.6800	34.50	-12.23	22.27	43.50	-21.23	peak	
2		224.0000	34.35	-13.90	20.45	46.00	-25.55	peak	
3		402.4800	30.54	-7.80	22.74	46.00	-23.26	peak	
4		575.1400	30.78	-5.81	24.97	46.00	-21.03	peak	
5		665.3500	29.98	-3.55	26.43	46.00	-19.57	peak	
6	*	792.4200	29.97	-0.08	29.89	46.00	-16.11	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz – Adapter: Huntkey


**Vertical**

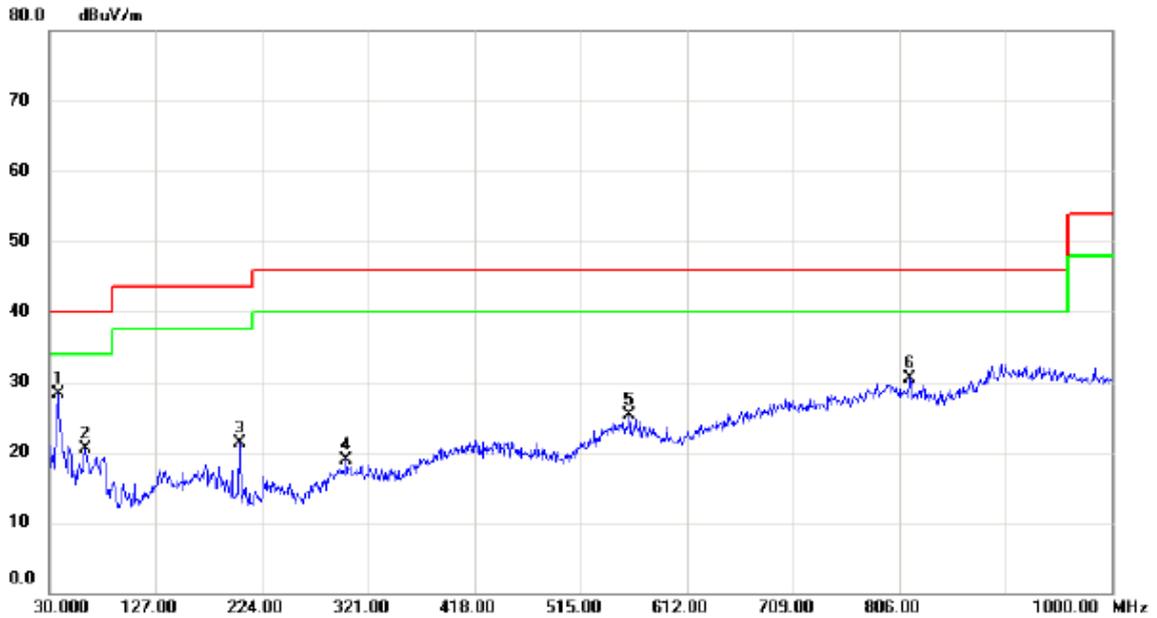

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	42.36	-14.09	28.27	40.00	-11.73	peak	
2		62.9800	35.14	-14.58	20.56	40.00	-19.44	peak	
3		203.6300	35.89	-14.51	21.38	43.50	-22.12	peak	
4		300.6300	29.02	-10.17	18.85	46.00	-27.15	peak	
5		559.6200	30.35	-5.03	25.32	46.00	-20.68	peak	
6		815.7000	30.76	-0.22	30.54	46.00	-15.46	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz – Adapter: Huntkey


### Horizontal

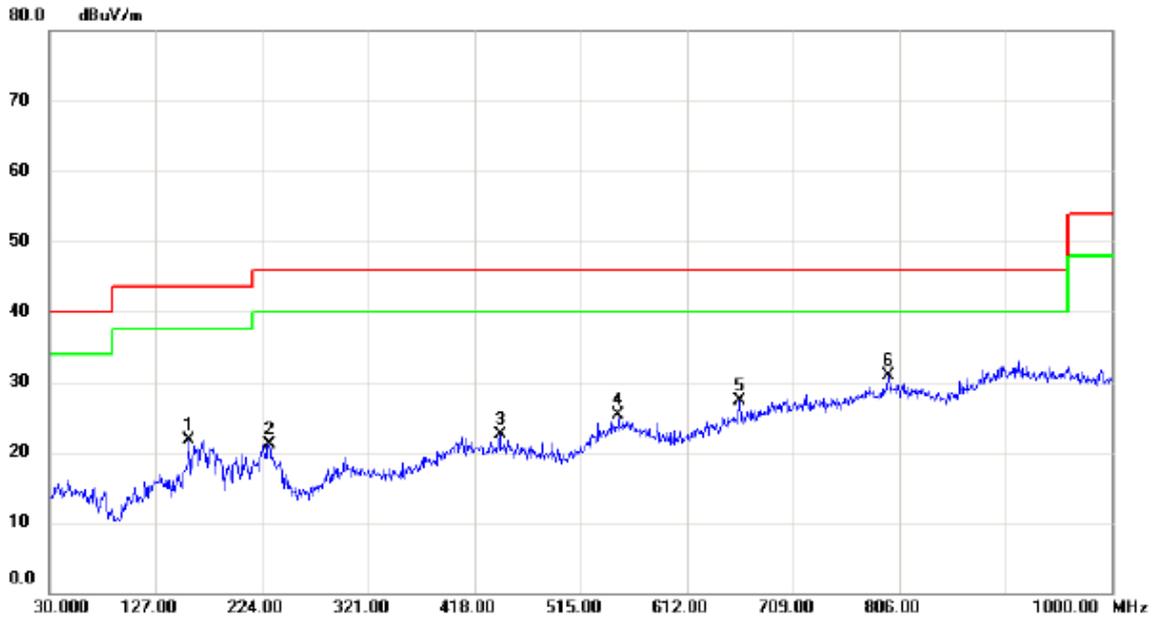

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		157.0700	34.01	-12.38	21.63	43.50	-21.87	peak	
2		230.7900	34.45	-13.40	21.05	46.00	-24.95	peak	
3		441.2800	30.50	-7.97	22.53	46.00	-23.47	peak	
4		549.9200	29.87	-4.55	25.32	46.00	-20.68	peak	
5		660.5000	31.03	-3.74	27.29	46.00	-18.71	peak	
6	*	796.3000	30.73	0.09	30.82	46.00	-15.18	peak	

Test Mode: UNII-3/TX A Mode 5745MHz – Adapter: Huntkey

Vertical

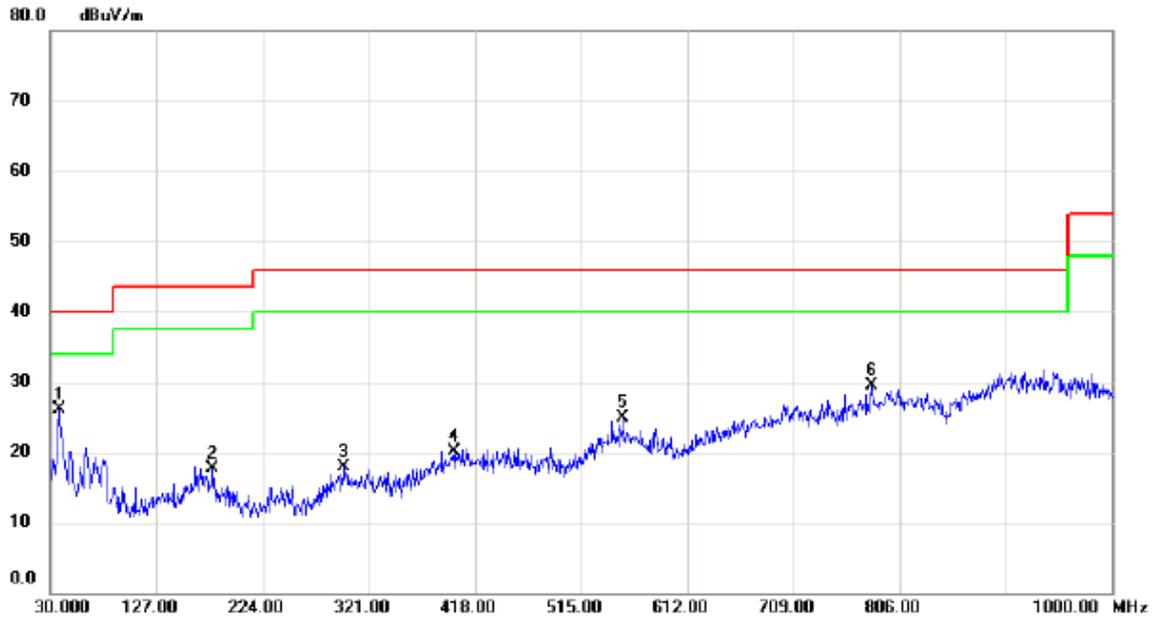

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	40.20	-14.09	26.11	40.00	-13.89	peak	
2		178.4100	30.40	-12.75	17.65	43.50	-25.85	peak	
3		298.6900	28.24	-10.30	17.94	46.00	-28.06	peak	
4		398.6000	28.03	-7.88	20.15	46.00	-25.85	peak	
5		553.8000	29.59	-4.73	24.86	46.00	-21.14	peak	
6		780.7800	30.08	-0.60	29.48	46.00	-16.52	peak	

Test Mode: UNII-3/TX A Mode 5745MHz – Adapter: Huntkey

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		170.6500	34.57	-12.29	22.28	43.50	-21.22	peak	
2		232.7300	34.54	-13.48	21.06	46.00	-24.94	peak	
3		288.0200	30.86	-11.40	19.46	46.00	-26.54	peak	
4		405.3900	29.43	-7.80	21.63	46.00	-24.37	peak	
5		553.8000	29.66	-4.73	24.93	46.00	-21.07	peak	
6	*	715.7900	30.48	-2.06	28.42	46.00	-17.58	peak	

Test Mode: UNII-3/TX A Mode 5825MHz – Adapter: Huntkey


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	40.91	-14.09	26.82	40.00	-13.18	peak	
2		206.5400	34.61	-14.58	20.03	43.50	-23.47	peak	
3		400.5400	29.80	-7.78	22.02	46.00	-23.98	peak	
4		547.0100	29.44	-4.85	24.59	46.00	-21.41	peak	
5		713.8500	30.53	-2.07	28.46	46.00	-17.54	peak	
6		793.3900	30.38	-0.03	30.35	46.00	-15.65	peak	

Test Mode: UNII-3/TX A Mode 5825MHz – Adapter: Huntkey


### Horizontal

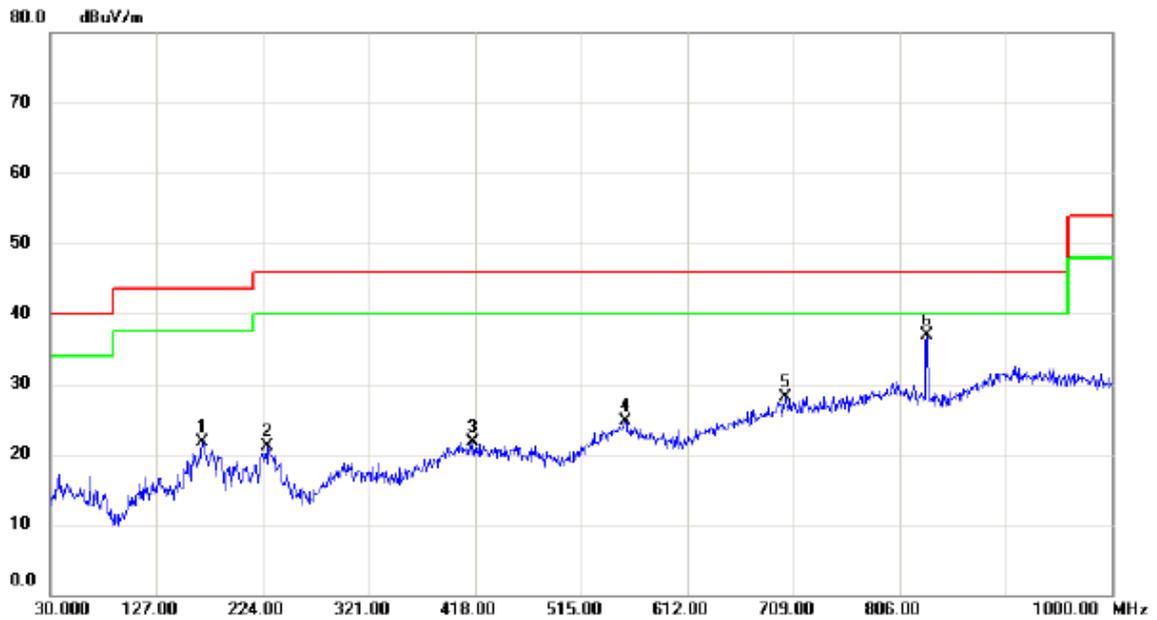

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		168.7100	33.97	-12.23	21.74	43.50	-21.76	peak	
2		228.8500	34.66	-13.47	21.19	46.00	-24.81	peak	
3		416.0600	29.53	-7.85	21.68	46.00	-24.32	peak	
4		555.7400	29.46	-4.83	24.63	46.00	-21.37	peak	
5		702.2100	30.14	-2.10	28.04	46.00	-17.96	peak	
6	*	831.2200	37.69	-0.69	37.00	46.00	-9.00	peak	

Test Mode: UNII-1/TX A Mode 5180MHz – Adapter: PHITEK


**Vertical**

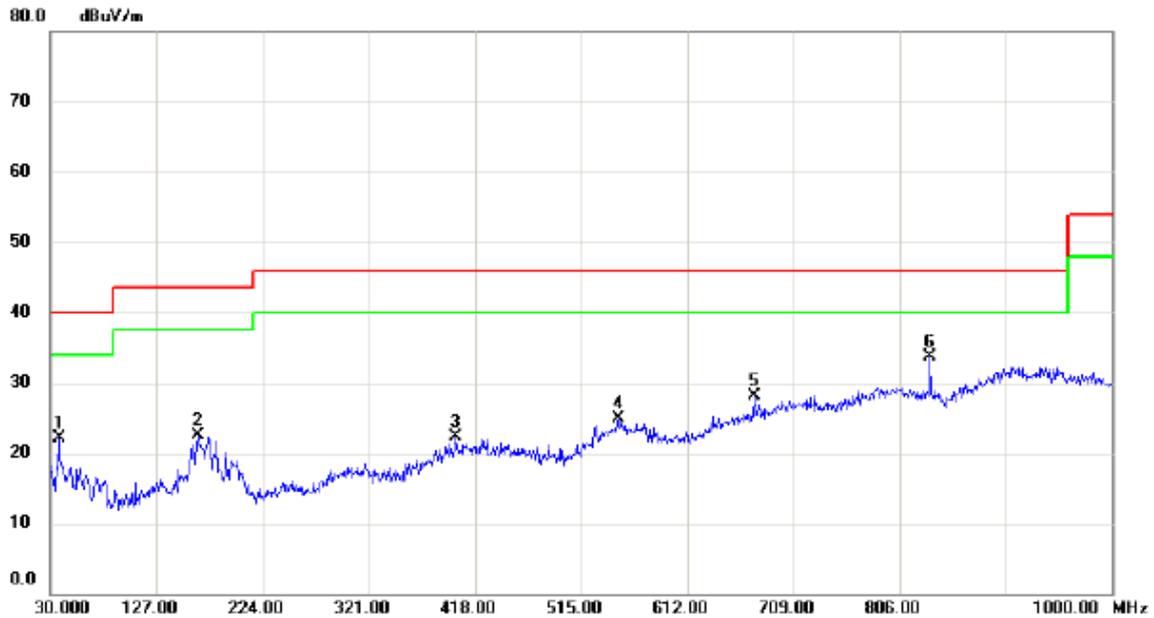

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	36.20	-14.09	22.11	40.00	-17.89	peak	
2		164.8300	34.77	-12.20	22.57	43.50	-20.93	peak	
3		400.5400	30.03	-7.78	22.25	46.00	-23.75	peak	
4		548.9500	29.61	-4.64	24.97	46.00	-21.03	peak	
5		673.1100	31.40	-3.23	28.17	46.00	-17.83	peak	
6	*	833.1600	34.40	-0.74	33.66	46.00	-12.34	peak	

Test Mode: UNII-1/TX A Mode 5180MHz – Adapter: PHITEK


**Horizontal**

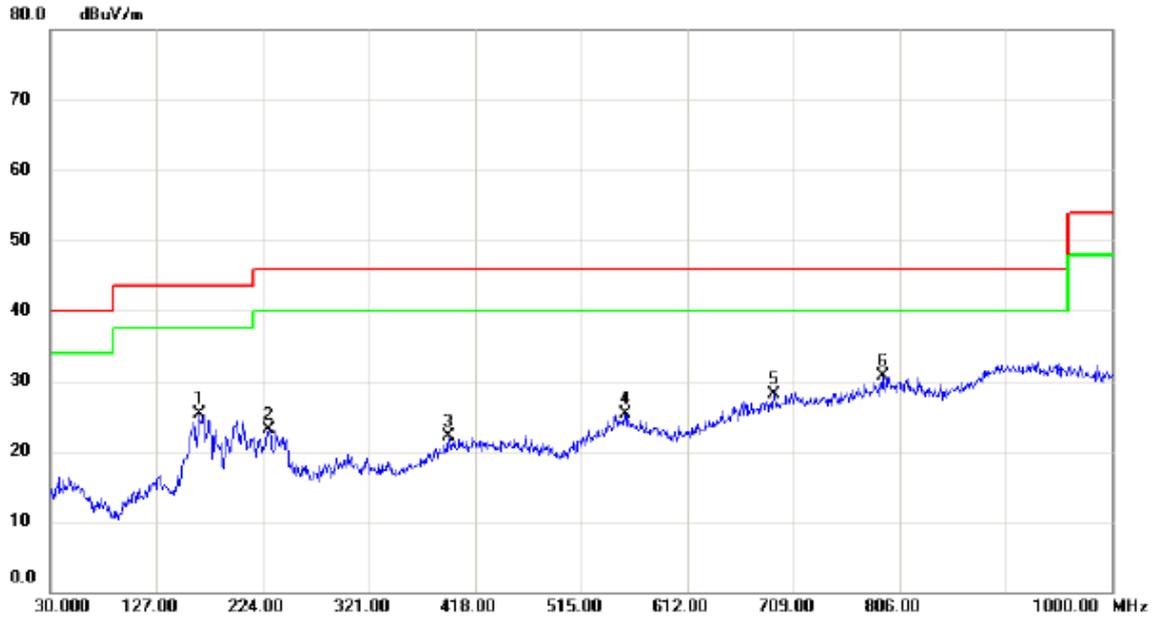

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		165.8000	37.61	-12.21	25.40	43.50	-18.10	peak	
2		229.8200	36.52	-13.38	23.14	46.00	-22.86	peak	
3		393.7500	30.22	-8.21	22.01	46.00	-23.99	peak	
4		555.7400	30.19	-4.83	25.36	46.00	-20.64	peak	
5		691.5400	30.65	-2.45	28.20	46.00	-17.80	peak	
6	*	790.4800	30.79	-0.16	30.63	46.00	-15.37	peak	

Test Mode: UNII-1/TX A Mode 5240MHz – Adapter: PHITEK


**Vertical**

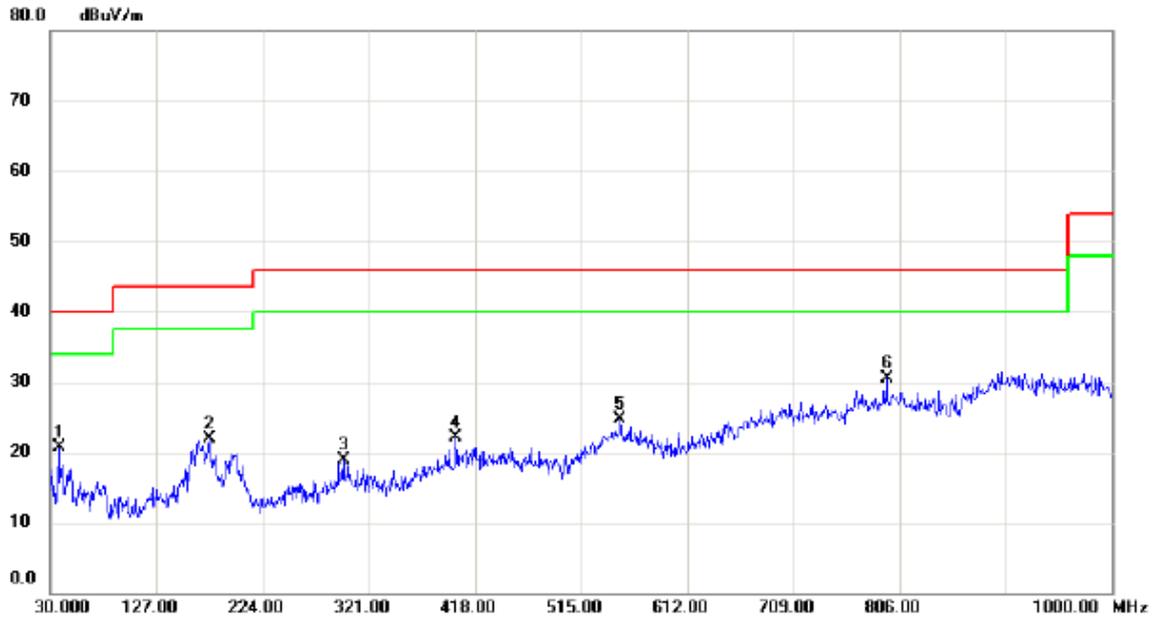

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	34.84	-14.09	20.75	40.00	-19.25	peak	
2		175.5000	34.40	-12.57	21.83	43.50	-21.67	peak	
3		297.7200	29.29	-10.41	18.88	46.00	-27.12	peak	
4		400.5400	29.88	-7.78	22.10	46.00	-23.90	peak	
5		550.8900	29.31	-4.59	24.72	46.00	-21.28	peak	
6	*	794.3600	30.48	0.01	30.49	46.00	-15.51	peak	

Test Mode: UNII-1/TX A Mode 5240MHz – Adapter: PHITEK


### Horizontal

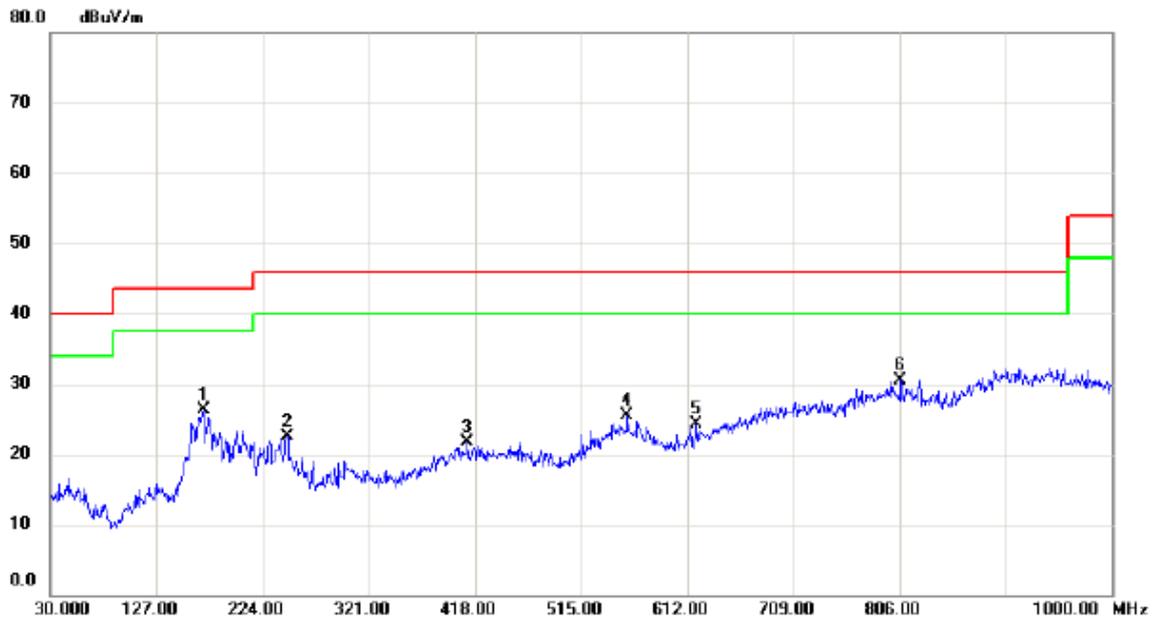

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		169.6800	38.45	-12.23	26.22	43.50	-17.28	peak	
2		246.3100	36.62	-14.05	22.57	46.00	-23.43	peak	
3		411.2100	29.57	-7.82	21.75	46.00	-24.25	peak	
4		557.6800	30.44	-4.92	25.52	46.00	-20.48	peak	
5		620.7300	30.11	-5.87	24.24	46.00	-21.76	peak	
6	*	806.9700	30.46	0.06	30.52	46.00	-15.48	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz – Adapter: PHITEK


Vertical

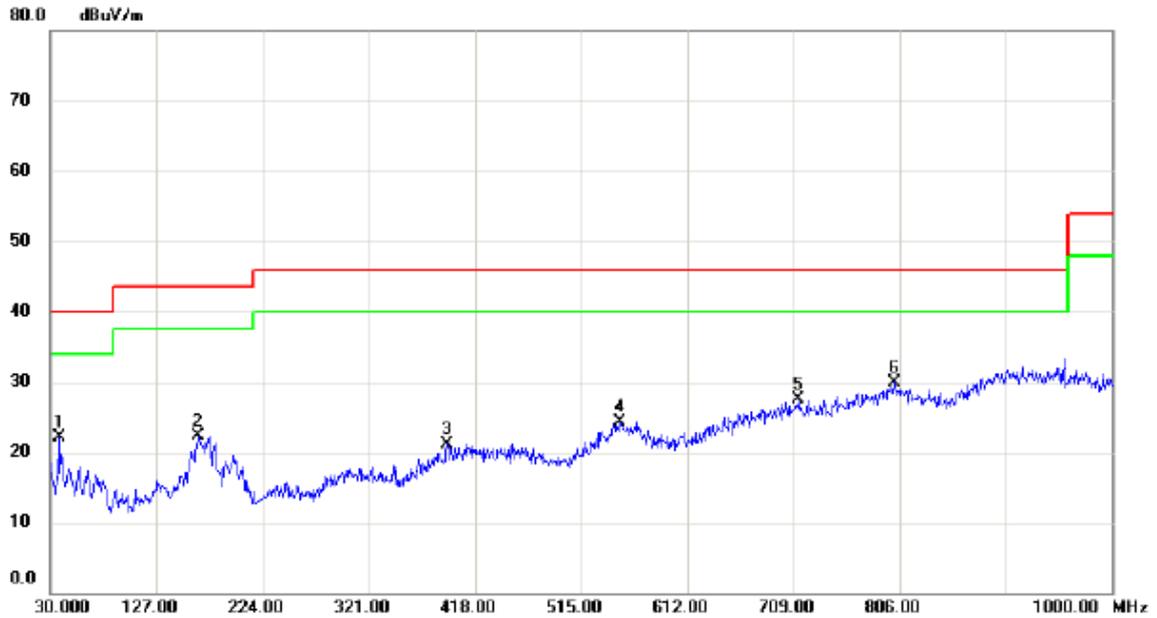

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	36.18	-14.09	22.09	40.00	-17.91	peak	
2		164.8300	34.53	-12.20	22.33	43.50	-21.17	peak	
3		392.7800	29.47	-8.29	21.18	46.00	-24.82	peak	
4		550.8900	28.99	-4.59	24.40	46.00	-21.60	peak	
5		713.8500	29.53	-2.07	27.46	46.00	-18.54	peak	
6	*	801.1500	29.77	0.23	30.00	46.00	-16.00	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz – Adapter: PHITEK


Horizontal

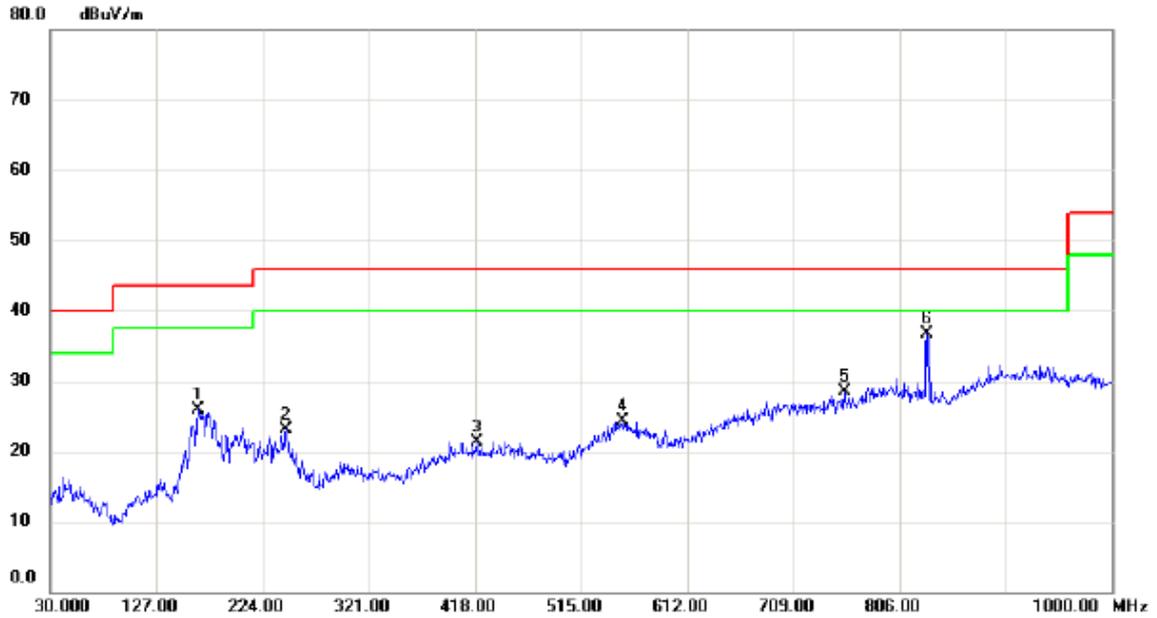

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		164.8300	38.18	-12.20	25.98	43.50	-17.52	peak	
2		245.3400	37.21	-14.01	23.20	46.00	-22.80	peak	
3		419.9400	29.20	-7.87	21.33	46.00	-24.67	peak	
4		553.8000	28.99	-4.73	24.26	46.00	-21.74	peak	
5		755.5600	30.25	-1.72	28.53	46.00	-17.47	peak	
6	*	831.2200	37.44	-0.69	36.75	46.00	-9.25	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz – Adapter: PHITEK

Vertical

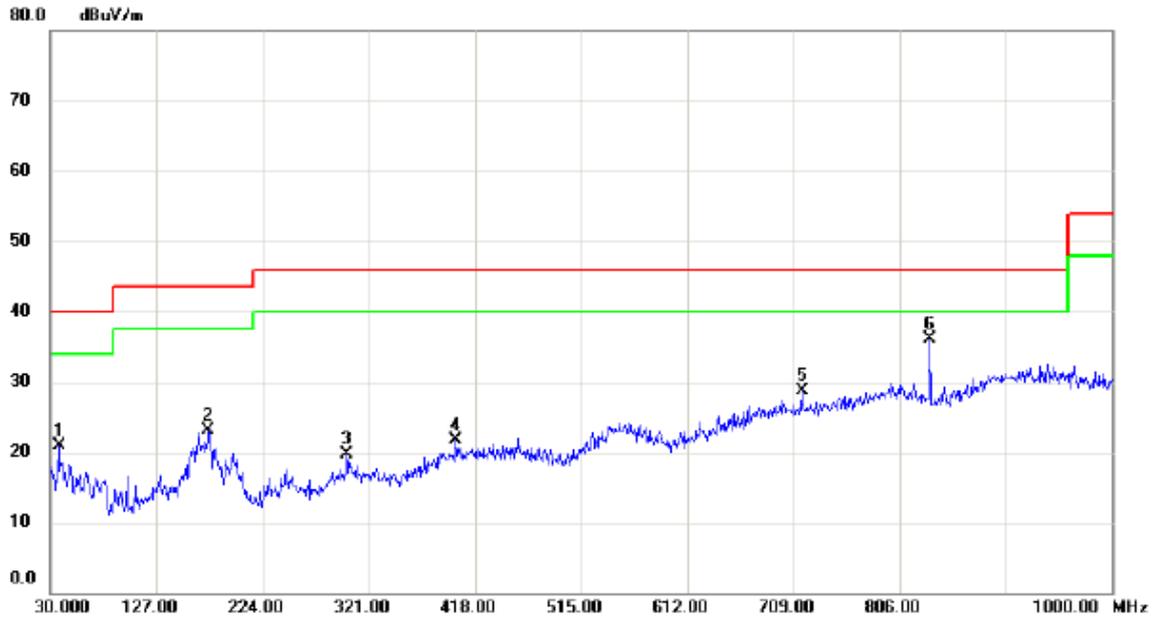

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	34.91	-14.09	20.82	40.00	-19.18	peak	
2		174.5300	35.55	-12.51	23.04	43.50	-20.46	peak	
3		300.6300	29.87	-10.17	19.70	46.00	-26.30	peak	
4		400.5400	29.48	-7.78	21.70	46.00	-24.30	peak	
5		716.7600	30.86	-2.06	28.80	46.00	-17.20	peak	
6	*	834.1300	36.88	-0.78	36.10	46.00	-9.90	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz – Adapter: PHITEK


### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		164.8300	38.18	-12.20	25.98	43.50	-17.52	peak	
2		245.3400	37.21	-14.01	23.20	46.00	-22.80	peak	
3		419.9400	29.20	-7.87	21.33	46.00	-24.67	peak	
4		564.4700	29.54	-5.27	24.27	46.00	-21.73	peak	
5		793.3900	30.59	-0.03	30.56	46.00	-15.44	peak	
6	*	831.2200	37.44	-0.69	36.75	46.00	-9.25	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz – Adapter: PHITEK


**Vertical**

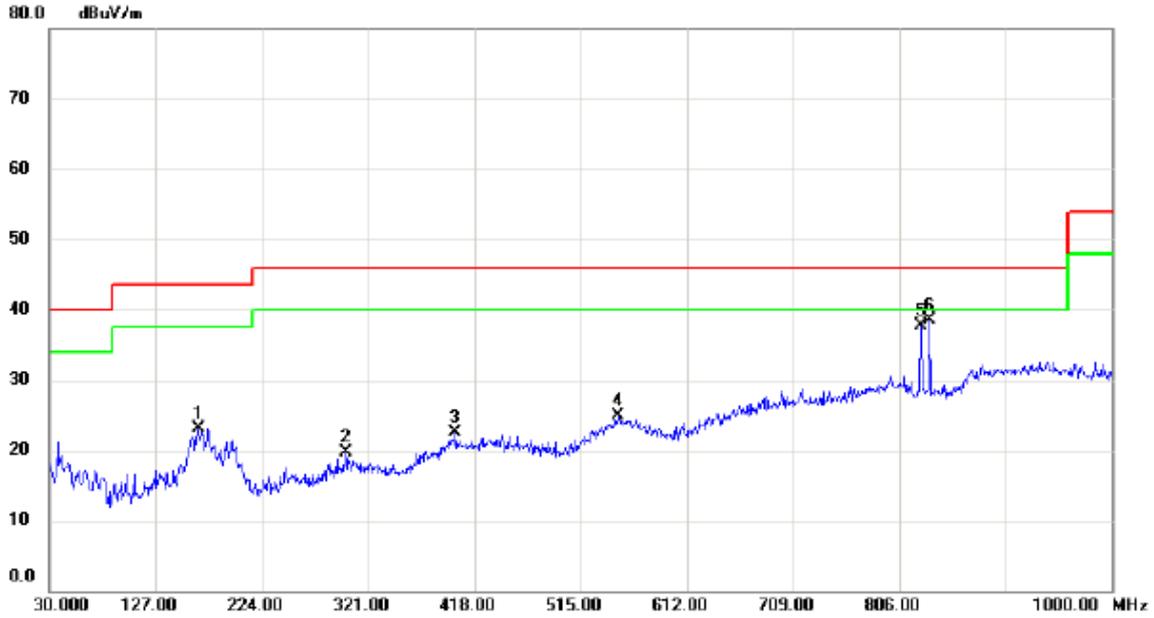

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		165.8000	35.23	-12.21	23.02	43.50	-20.48	peak	
2		300.6300	29.87	-10.17	19.70	46.00	-26.30	peak	
3		400.5400	30.32	-7.78	22.54	46.00	-23.46	peak	
4		549.9200	29.44	-4.55	24.89	46.00	-21.11	peak	
5		825.4000	38.15	-0.51	37.64	46.00	-8.36	peak	
6	*	833.1600	39.33	-0.74	38.59	46.00	-7.41	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz – Adapter: PHITEK


### Horizontal

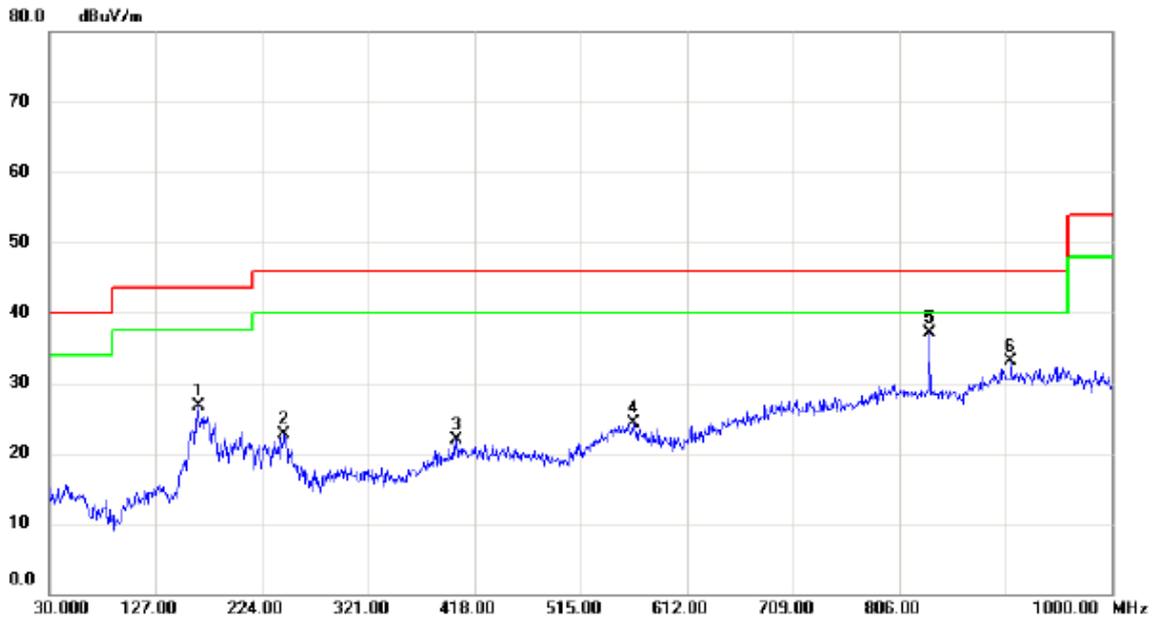

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		165.8000	38.82	-12.21	26.61	43.50	-16.89	peak	
2		244.3700	36.62	-13.96	22.66	46.00	-23.34	peak	
3		401.5100	29.61	-7.79	21.82	46.00	-24.18	peak	
4		563.5000	29.48	-5.22	24.26	46.00	-21.74	peak	
5	*	833.1600	37.92	-0.74	37.18	46.00	-8.82	peak	
6		907.8500	30.49	2.61	33.10	46.00	-12.90	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz – Adapter: PHITEK


Vertical

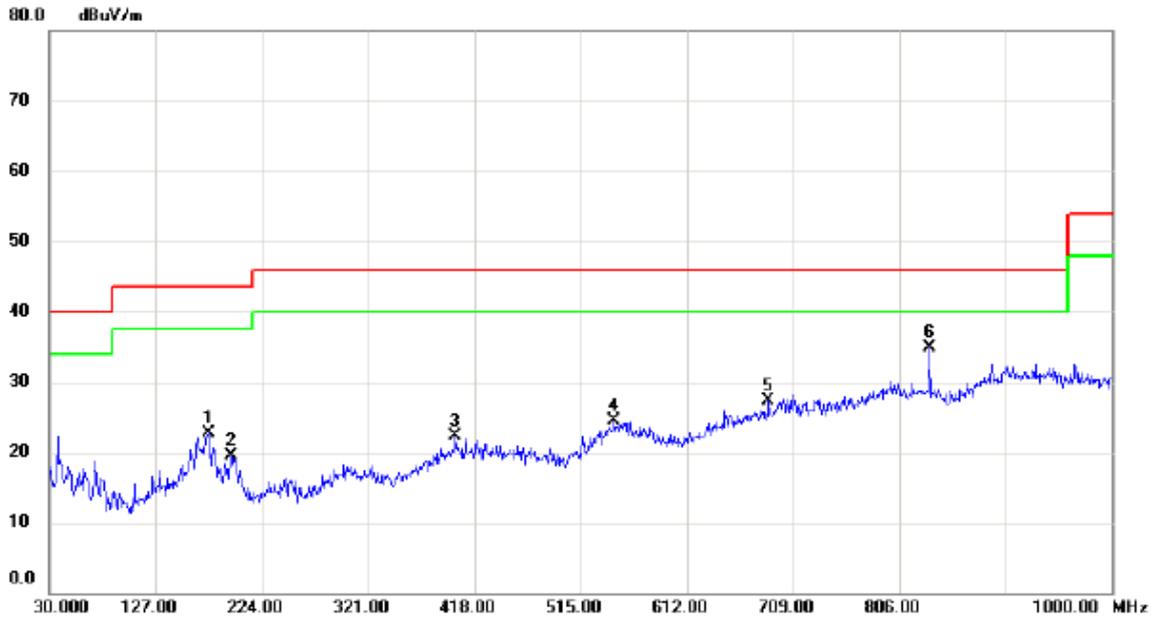

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		175.5000	35.18	-12.57	22.61	43.50	-20.89	peak	
2		195.8700	33.83	-14.23	19.60	43.50	-23.90	peak	
3		400.5400	30.12	-7.78	22.34	46.00	-23.66	peak	
4		545.0700	29.52	-5.04	24.48	46.00	-21.52	peak	
5		686.6900	30.02	-2.65	27.37	46.00	-18.63	peak	
6	*	833.1600	35.73	-0.74	34.99	46.00	-11.01	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz – Adapter: PHITEK


**Horizontal**

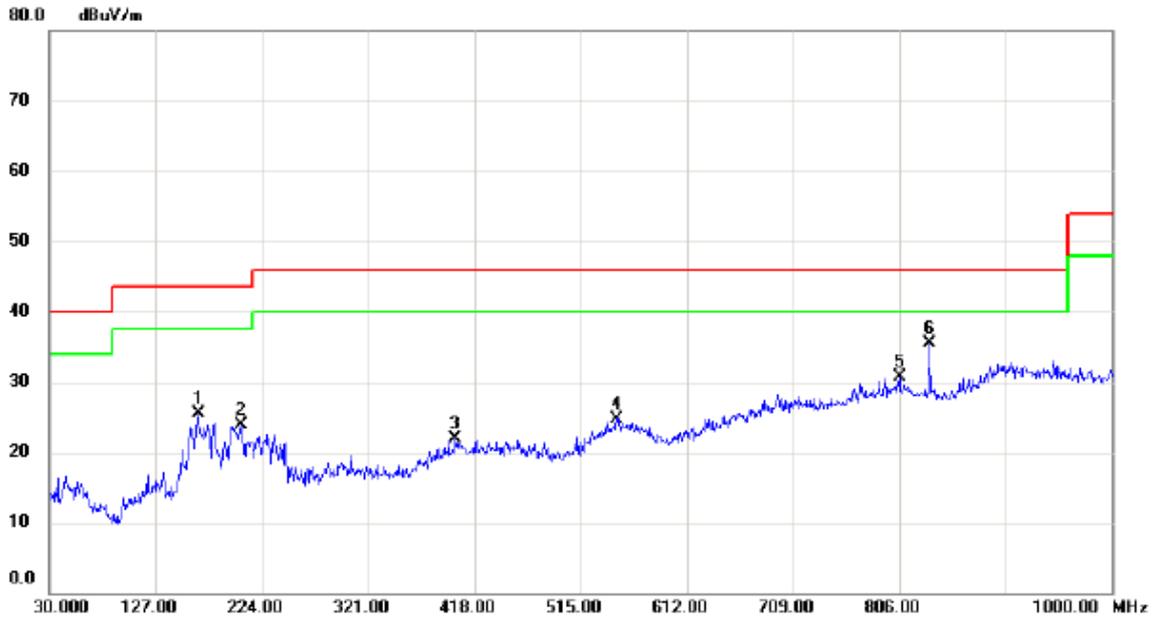

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		165.8000	37.79	-12.21	25.58	43.50	-17.92	peak	
2		204.6000	38.39	-14.53	23.86	43.50	-19.64	peak	
3		400.5400	29.60	-7.78	21.82	46.00	-24.18	peak	
4		547.9800	29.55	-4.75	24.80	46.00	-21.20	peak	
5		806.0000	30.61	0.07	30.68	46.00	-15.32	peak	
6	*	833.1600	36.33	-0.74	35.59	46.00	-10.41	peak	

Test Mode: UNII-3/TX A Mode 5745MHz – Adapter: PHITEK


**Vertical**

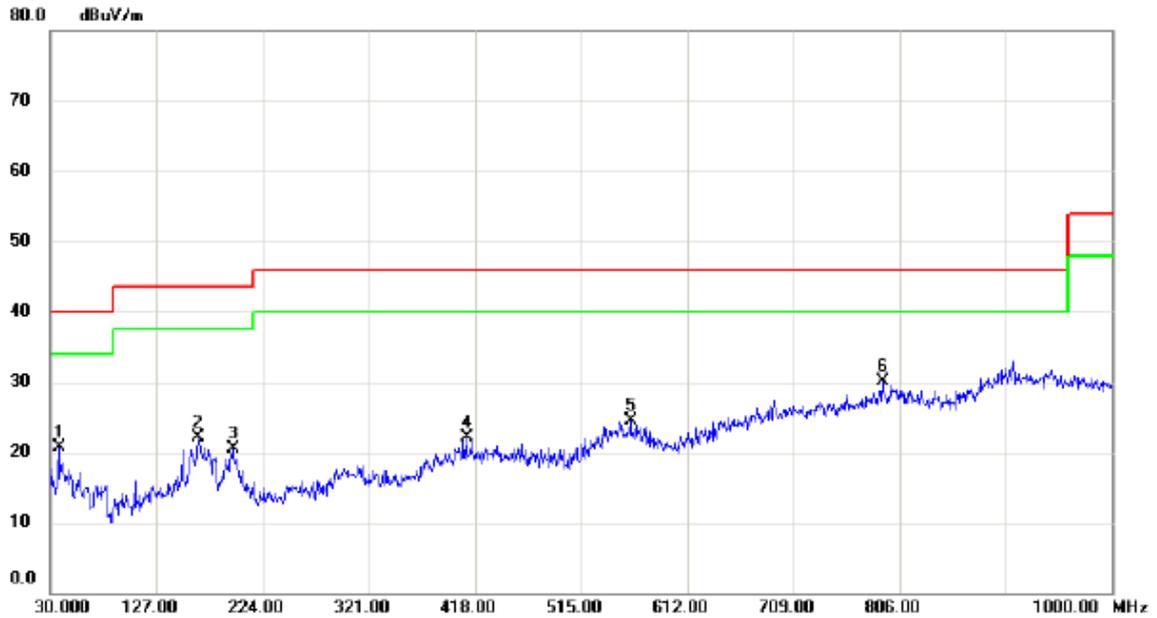

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	34.84	-14.09	20.75	40.00	-19.25	peak	
2		164.8300	34.35	-12.20	22.15	43.50	-21.35	peak	
3		196.8400	34.72	-14.27	20.45	43.50	-23.05	peak	
4		410.2400	29.96	-7.82	22.14	46.00	-23.86	peak	
5		560.5900	29.65	-5.07	24.58	46.00	-21.42	peak	
6	*	790.4800	30.21	-0.16	30.05	46.00	-15.95	peak	

Test Mode: UNII-3/TX A Mode 5745MHz – Adapter: PHITEK


Horizontal

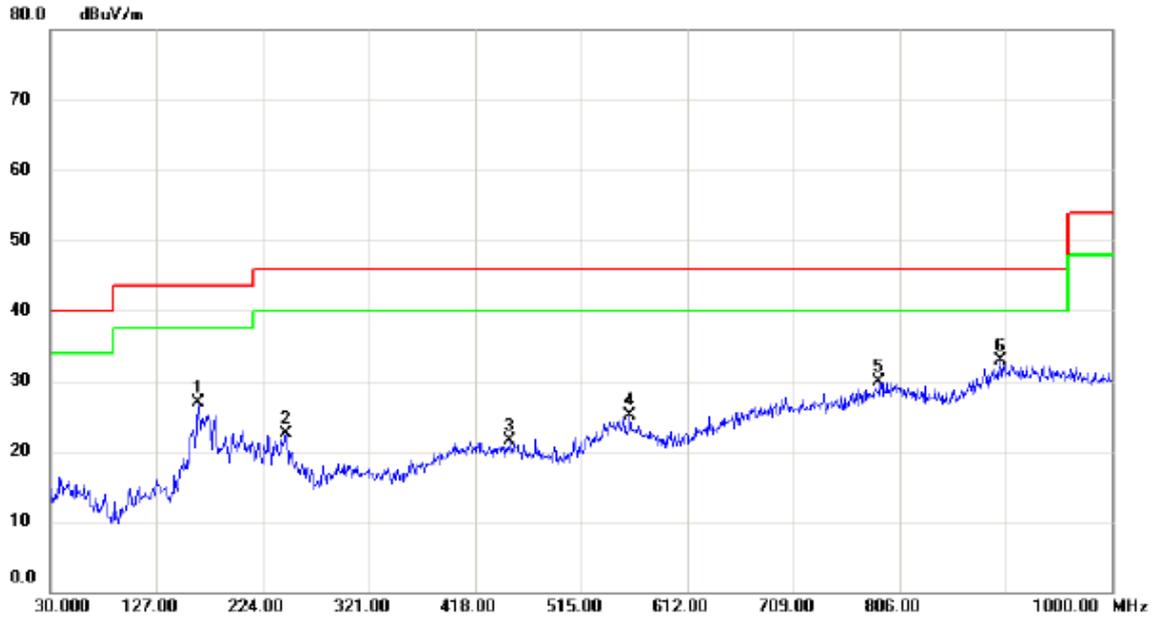

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		164.8300	39.18	-12.20	26.98	43.50	-16.52	peak	
2		245.3400	36.57	-14.01	22.56	46.00	-23.44	peak	
3		450.0100	29.58	-8.00	21.58	46.00	-24.42	peak	
4		559.6200	30.14	-5.03	25.11	46.00	-20.89	peak	
5		787.5700	30.16	-0.29	29.87	46.00	-16.13	peak	
6	*	898.1500	30.33	2.50	32.83	46.00	-13.17	peak	

Test Mode: UNII-3/TX A Mode 5825MHz – Adapter: PHITEK

**Vertical**

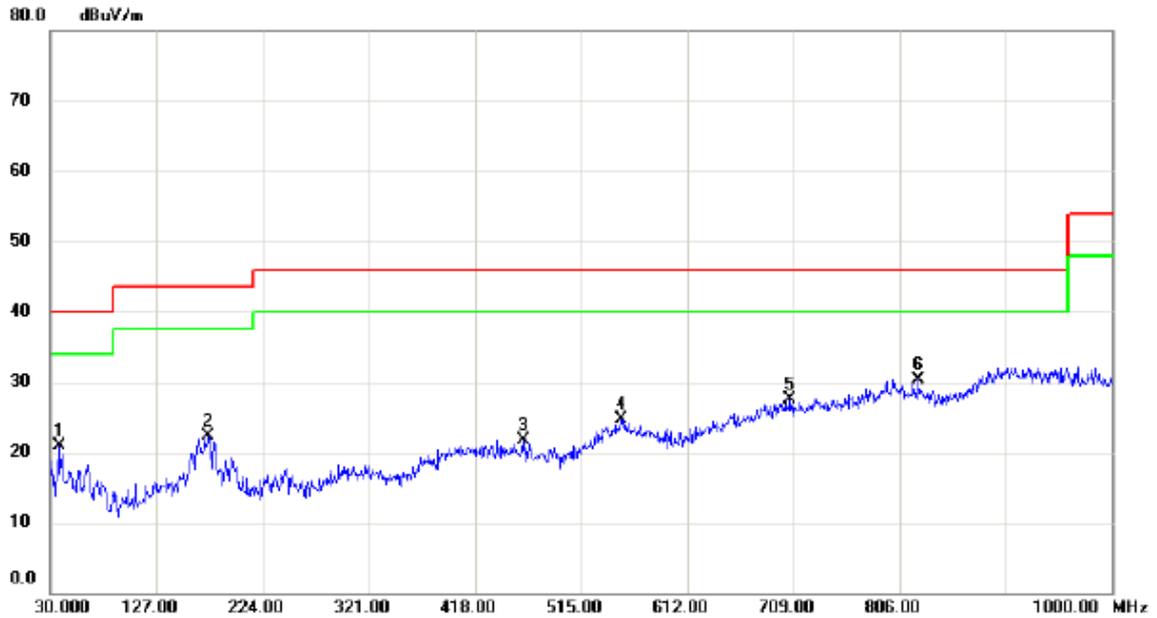

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	35.07	-14.09	20.98	40.00	-19.02	peak	
2		174.5300	34.78	-12.51	22.27	43.50	-21.23	peak	
3		462.6200	30.07	-8.43	21.64	46.00	-24.36	peak	
4		551.8600	29.36	-4.63	24.73	46.00	-21.27	peak	
5		706.0900	29.50	-2.08	27.42	46.00	-18.58	peak	
6	*	823.4600	30.71	-0.44	30.27	46.00	-15.73	peak	

Test Mode: UNII-3/TX A Mode 5825MHz – Adapter: PHITEK

Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		164.8300	37.92	-12.20	25.72	43.50	-17.78	peak	
2		204.6000	38.63	-14.53	24.10	43.50	-19.40	peak	
3		428.6700	30.15	-7.90	22.25	46.00	-23.75	peak	
4		557.6800	29.19	-4.92	24.27	46.00	-21.73	peak	
5		694.4500	30.50	-2.33	28.17	46.00	-17.83	peak	
6	*	825.4000	36.16	-0.51	35.65	46.00	-10.35	peak	

## ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


### Vertical

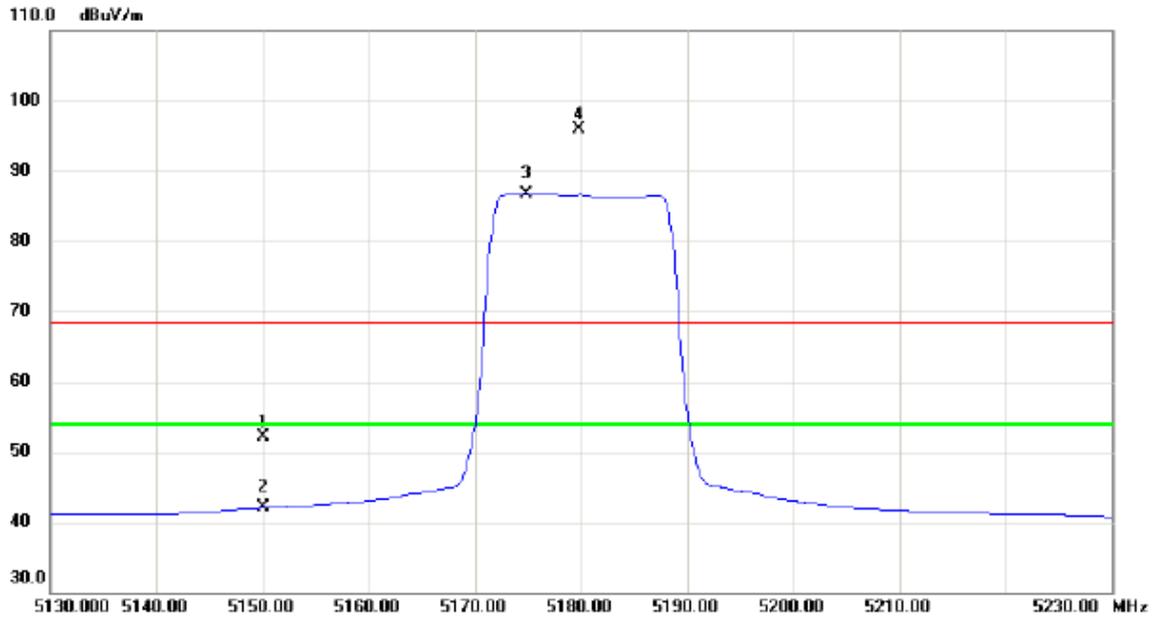


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	11.48	40.63	52.11	68.30	-16.19	peak	
2		5150.000	1.41	40.63	42.04	54.00	-11.96	AVG	
3	*	5174.900	46.03	40.71	86.74	54.00	32.74	AVG	No Limit
4	X	5179.800	55.28	40.72	96.00	68.30	27.70	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

### Vertical

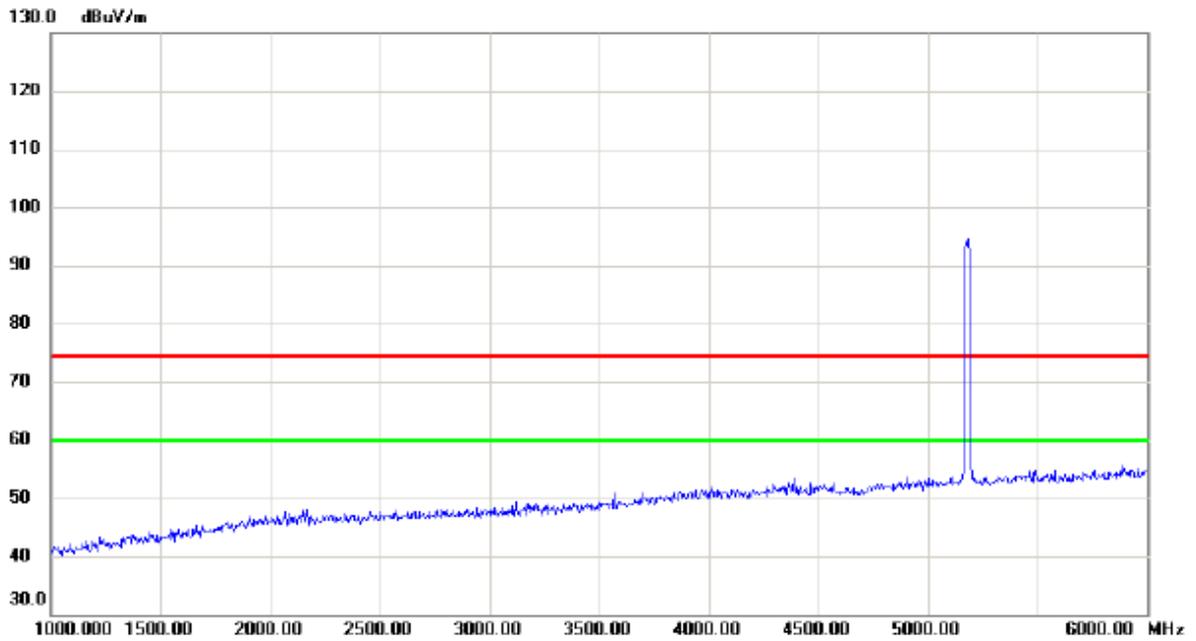


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

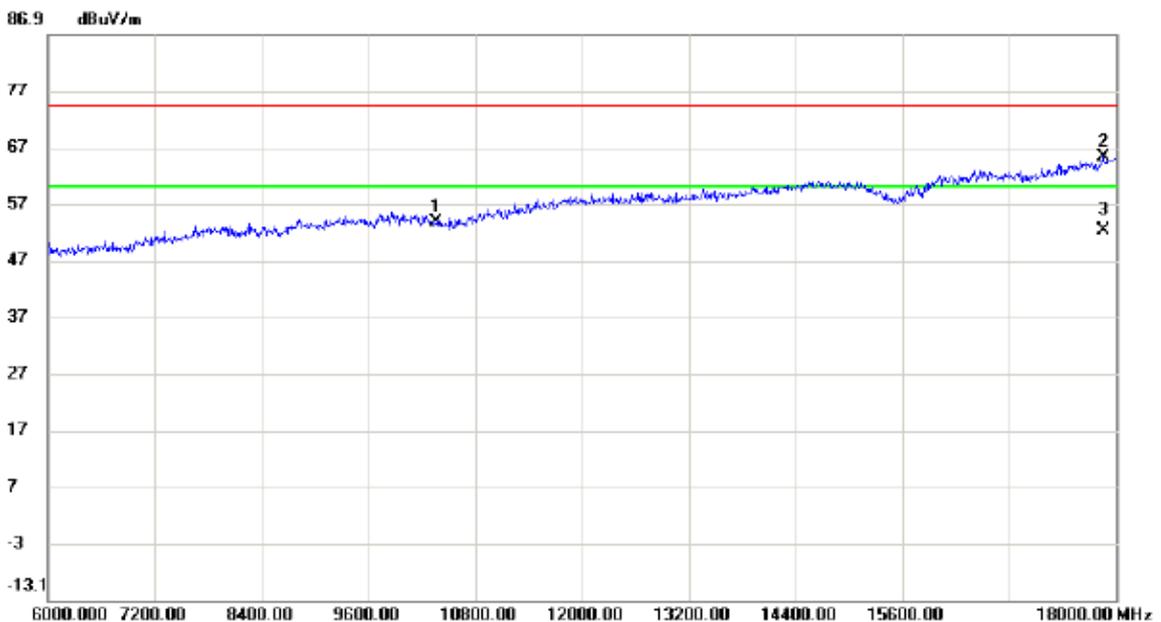


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	39.91	13.85	53.76	74.30	-20.54	peak	
2		17856.00	41.75	23.41	65.16	74.30	-9.14	peak	
3	*	17856.00	28.93	23.41	52.34	60.00	-7.66	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

### Vertical

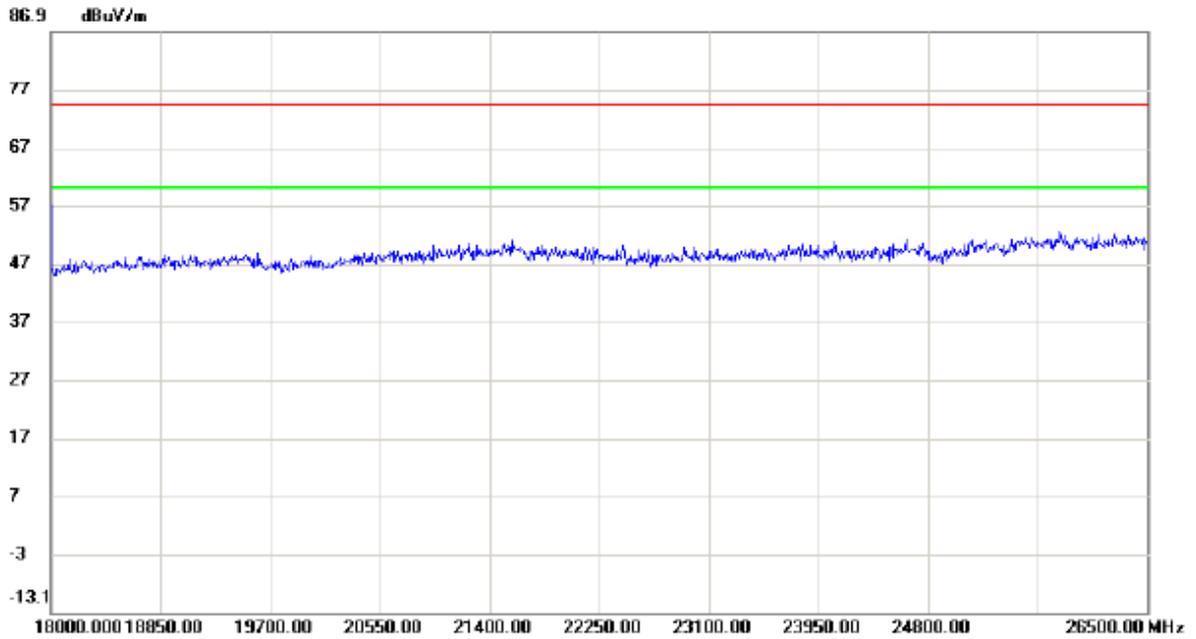


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

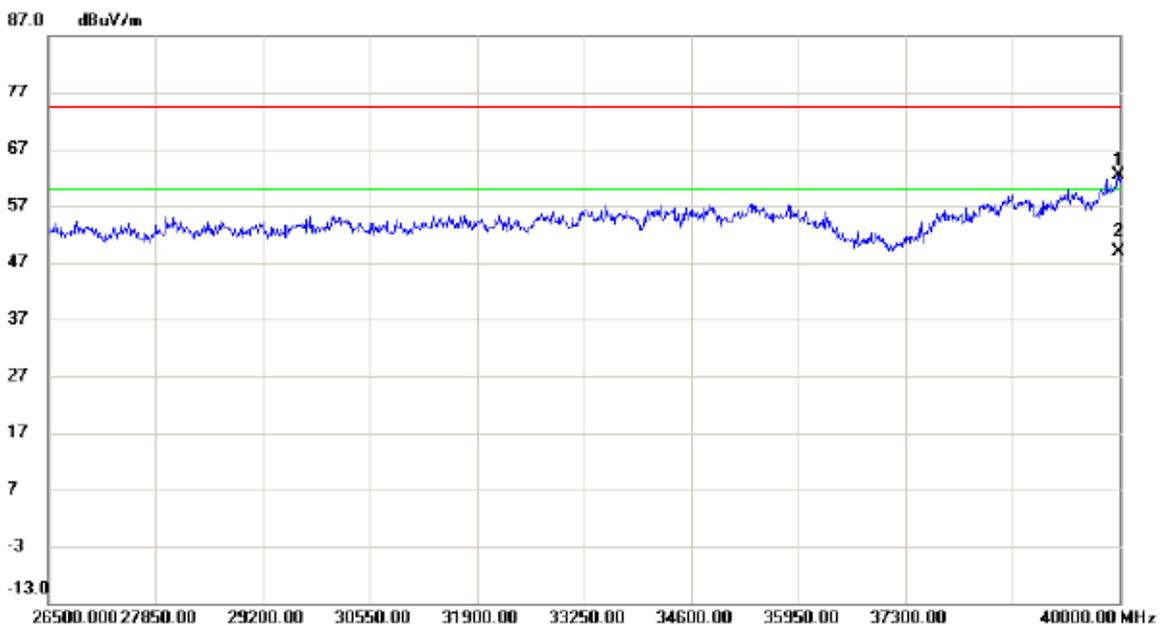

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39986.50	44.85	17.56	62.41	74.30	-11.89	peak	
2	*	39986.50	31.43	17.56	48.99	60.00	-11.01	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


### Horizontal

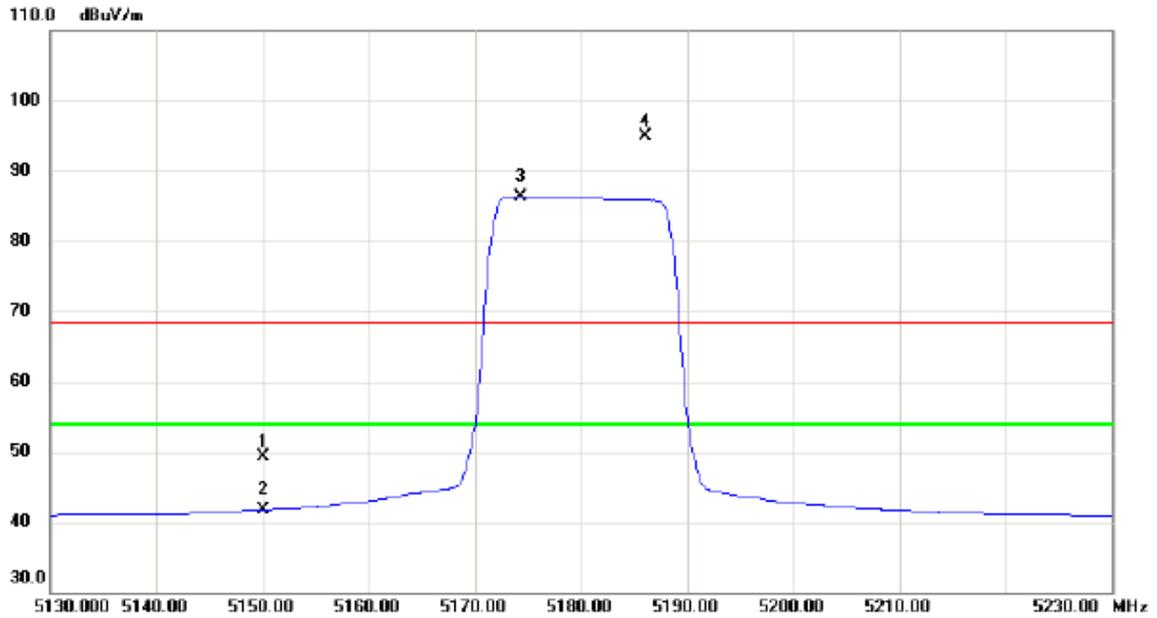


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	8.71	40.63	49.34	68.30	-18.96	peak	
2		5150.000	1.12	40.63	41.75	54.00	-12.25	AVG	
3	*	5174.400	45.53	40.71	86.24	54.00	32.24	AVG	No Limit
4	X	5186.100	54.16	40.75	94.91	68.30	26.61	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

### Horizontal

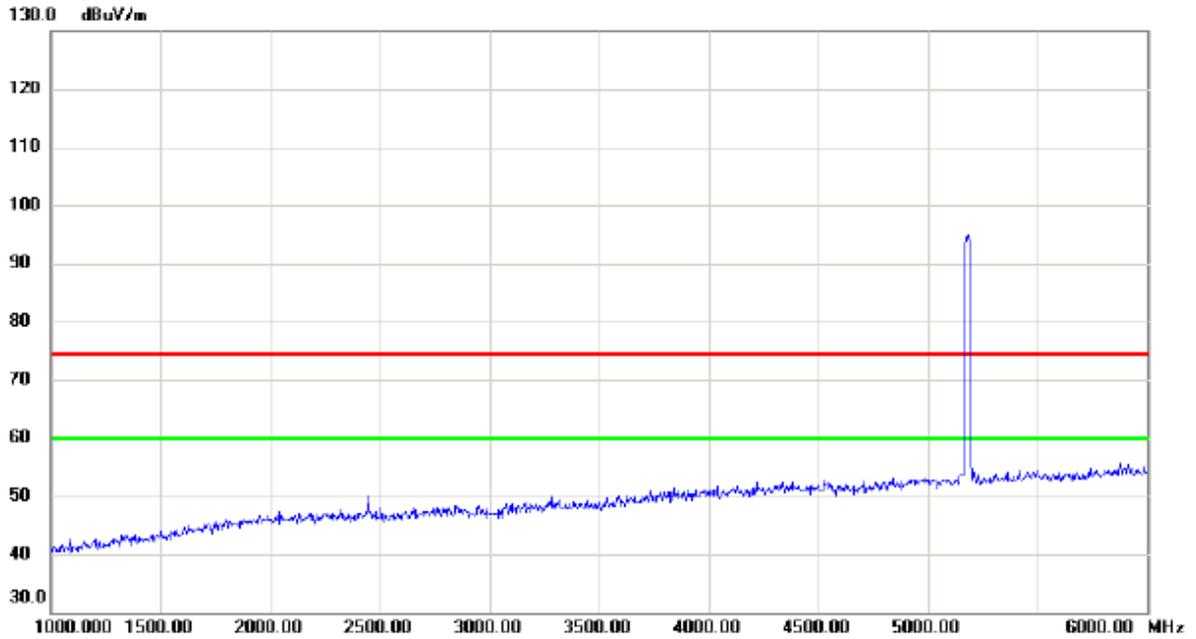


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

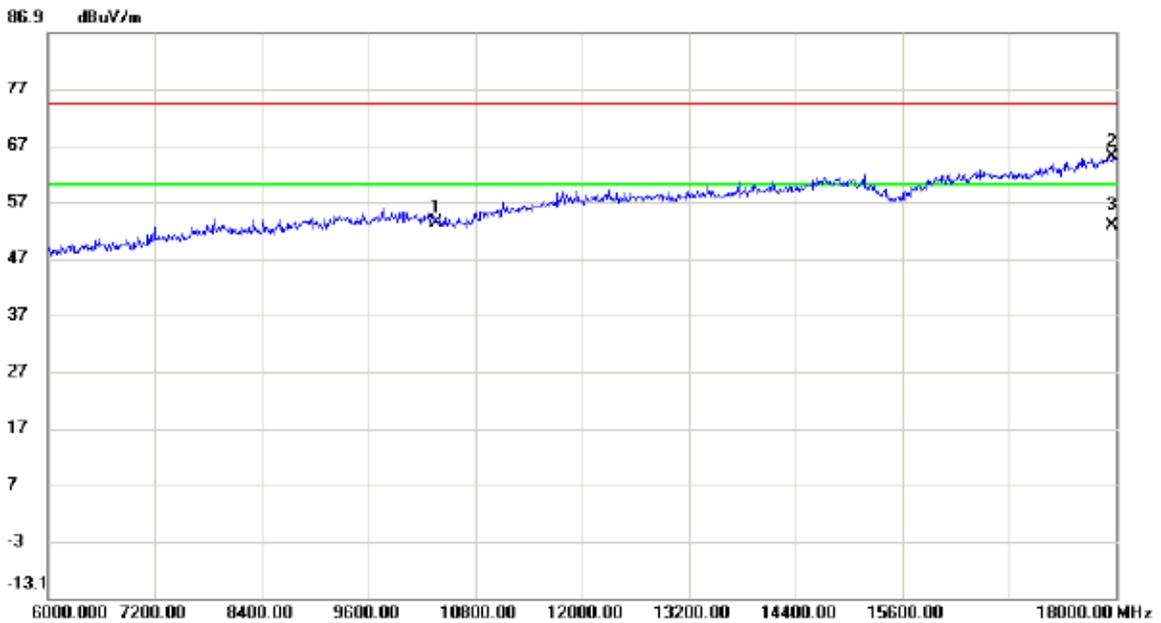


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	39.52	13.85	53.37	74.30	-20.93	peak	
2		17964.00	41.38	23.72	65.10	74.30	-9.20	peak	
3	*	17964.00	29.06	23.72	52.78	60.00	-7.22	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

### Horizontal

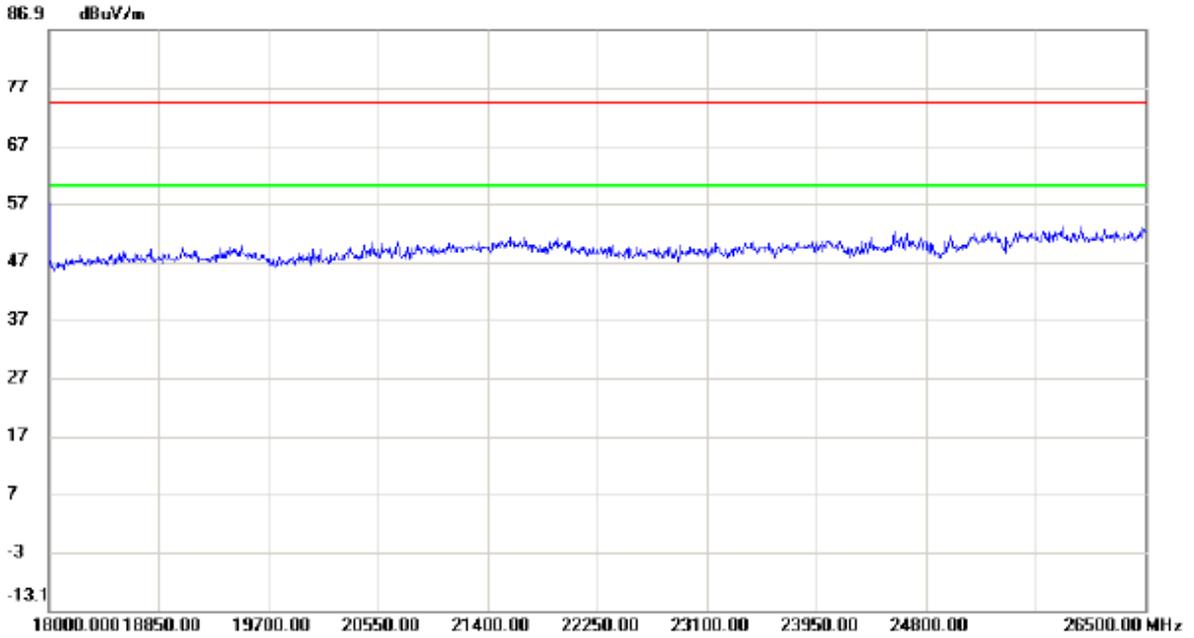


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

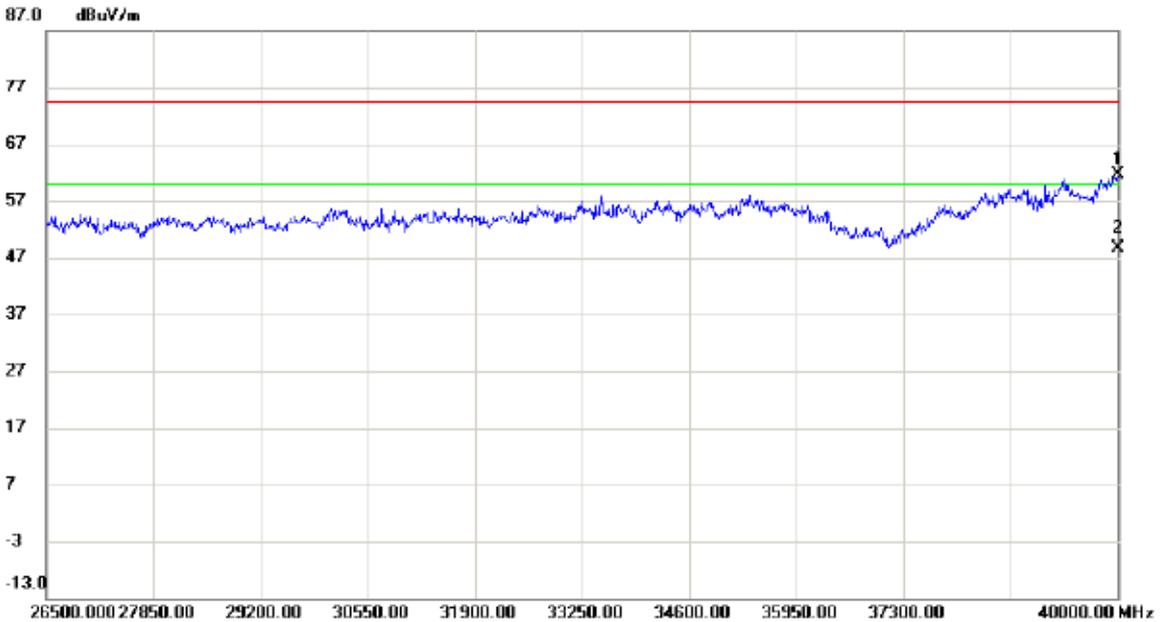

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	44.05	17.60	61.65	74.30	-12.65	peak	
2	*	40000.00	31.01	17.60	48.61	60.00	-11.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


### Vertical

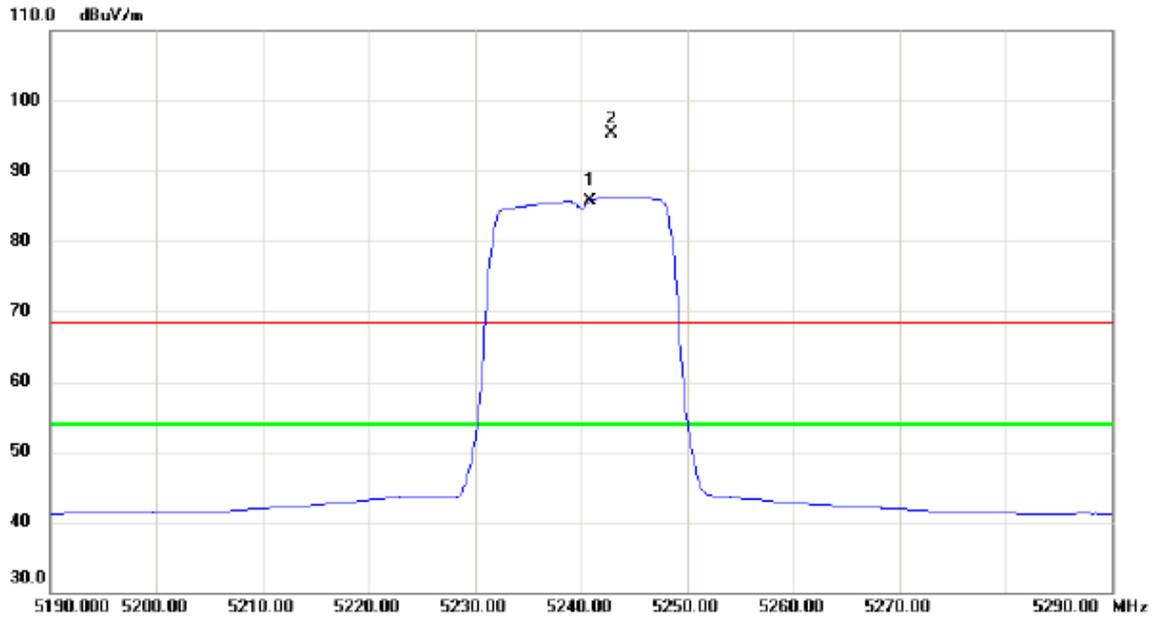


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5240.900	44.85	40.93	85.78	54.00	31.78	AVG	No Limit
2	X	5242.800	54.32	40.93	95.25	68.30	26.95	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

### Vertical

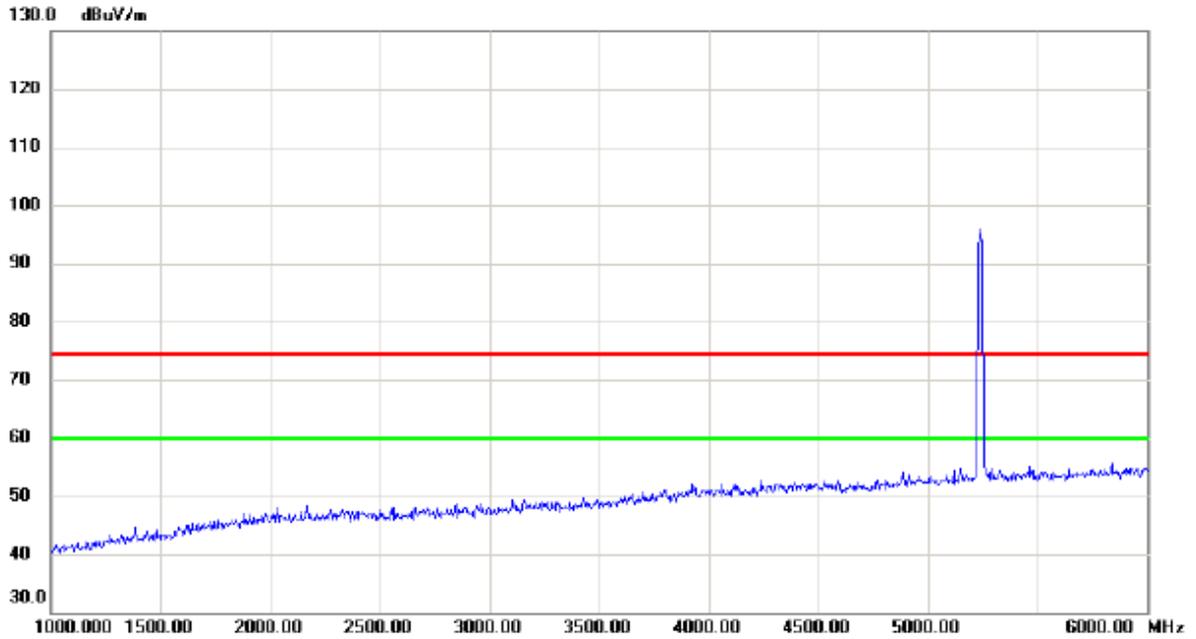


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

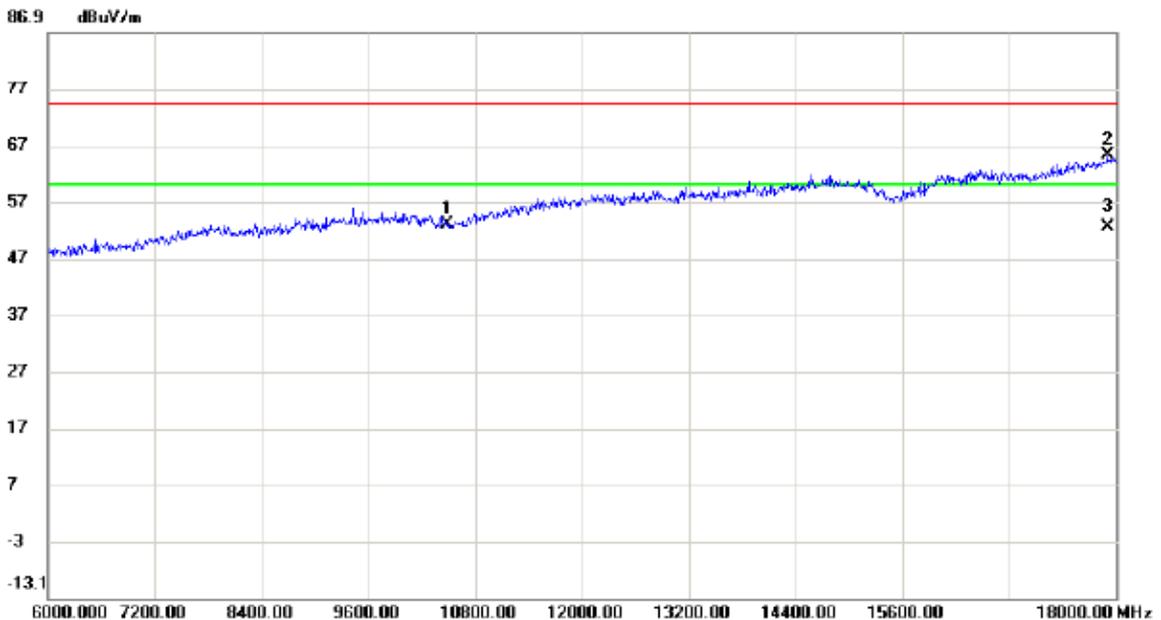


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	39.30	13.69	52.99	74.30	-21.31	peak	
2		17904.00	41.61	23.55	65.16	74.30	-9.14	peak	
3	*	17904.00	29.01	23.55	52.56	60.00	-7.44	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

**Vertical**

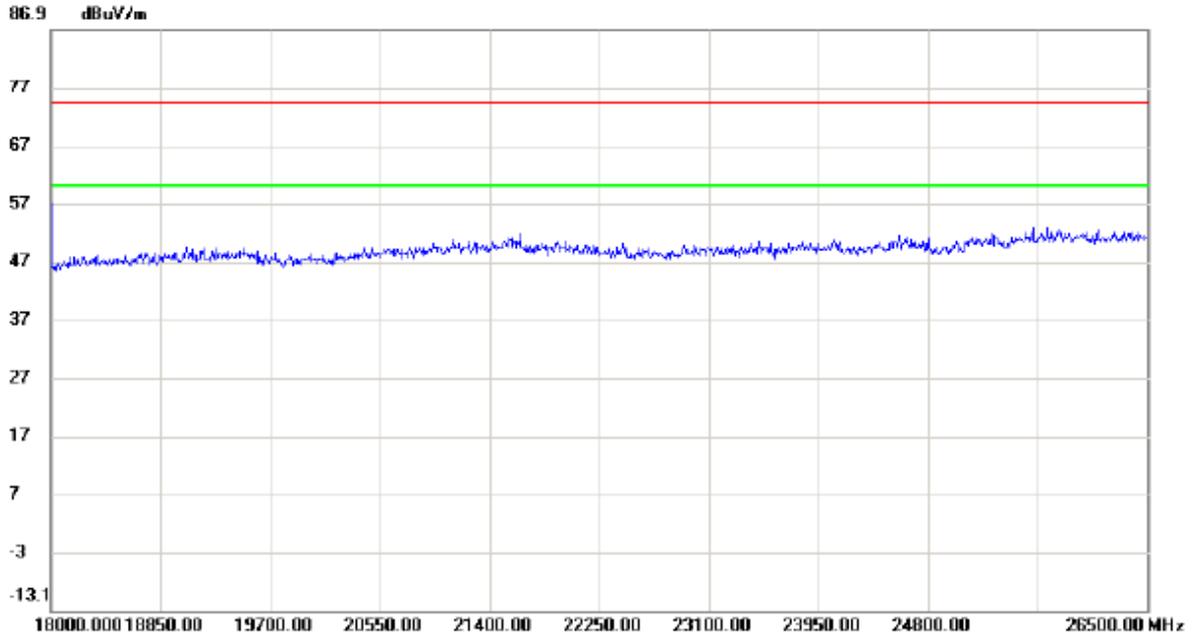


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

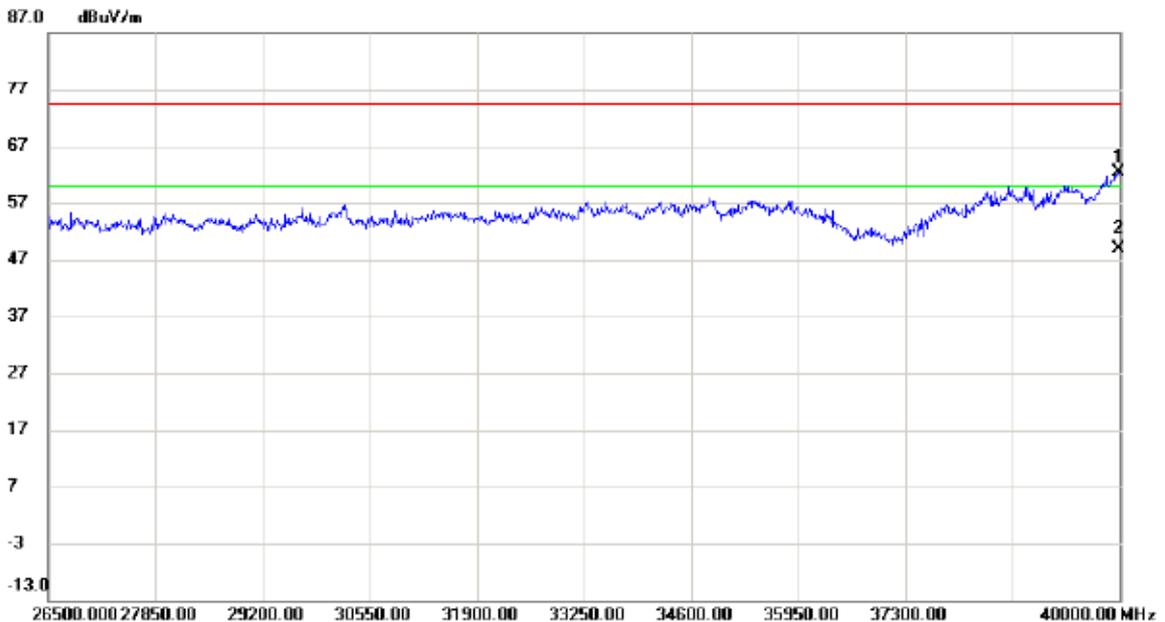

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39986.50	44.85	17.56	62.41	74.30	-11.89	peak	
2	*	39986.50	31.26	17.56	48.82	60.00	-11.18	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


### Horizontal

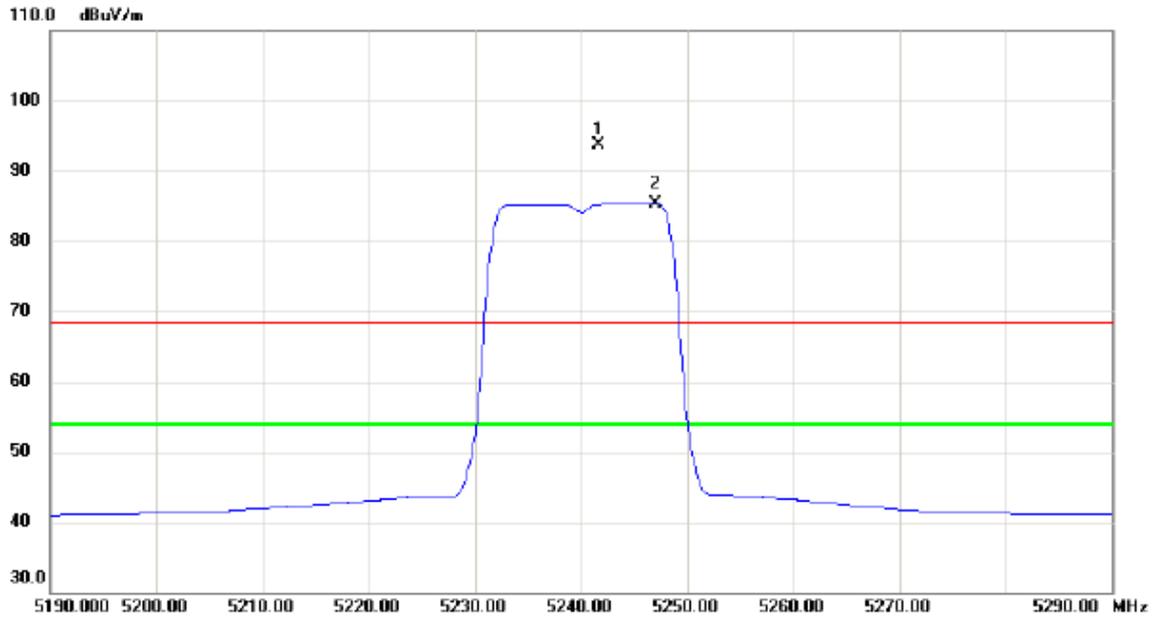

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5241.600	52.76	40.93	93.69	68.30	25.39	peak	No Limit
2	*	5247.000	44.39	40.94	85.33	54.00	31.33	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

### Horizontal

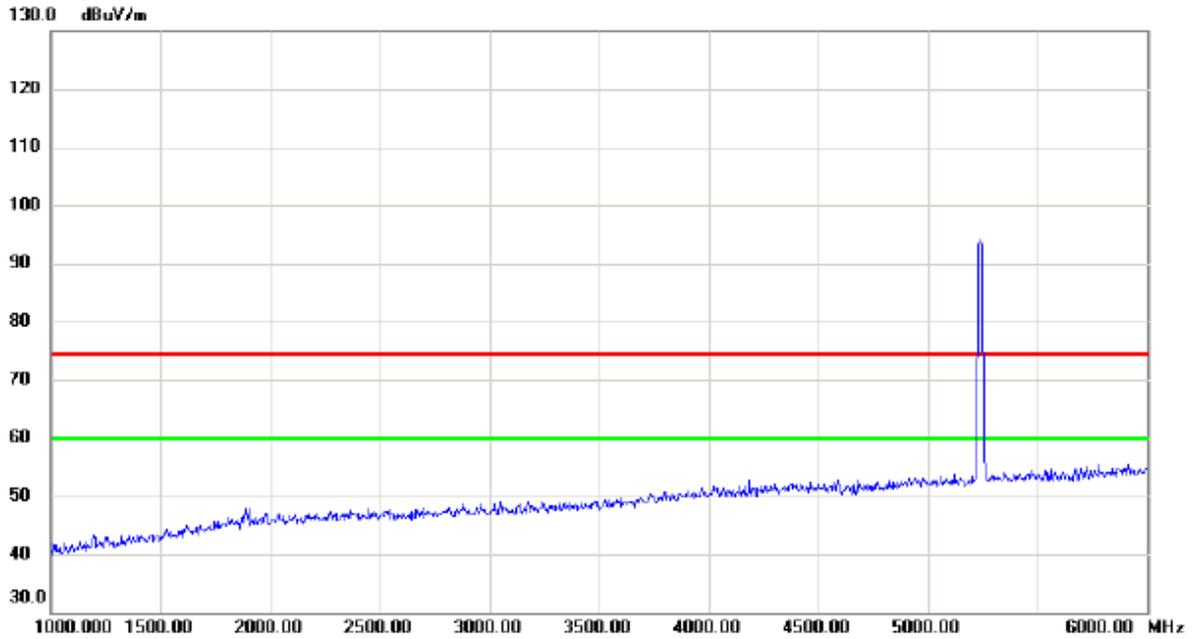


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	38.89	13.69	52.58	74.30	-21.72	peak	
2		17952.00	41.75	23.69	65.44	74.30	-8.86	peak	
3	*	17952.00	28.46	23.69	52.15	60.00	-7.85	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

### Horizontal

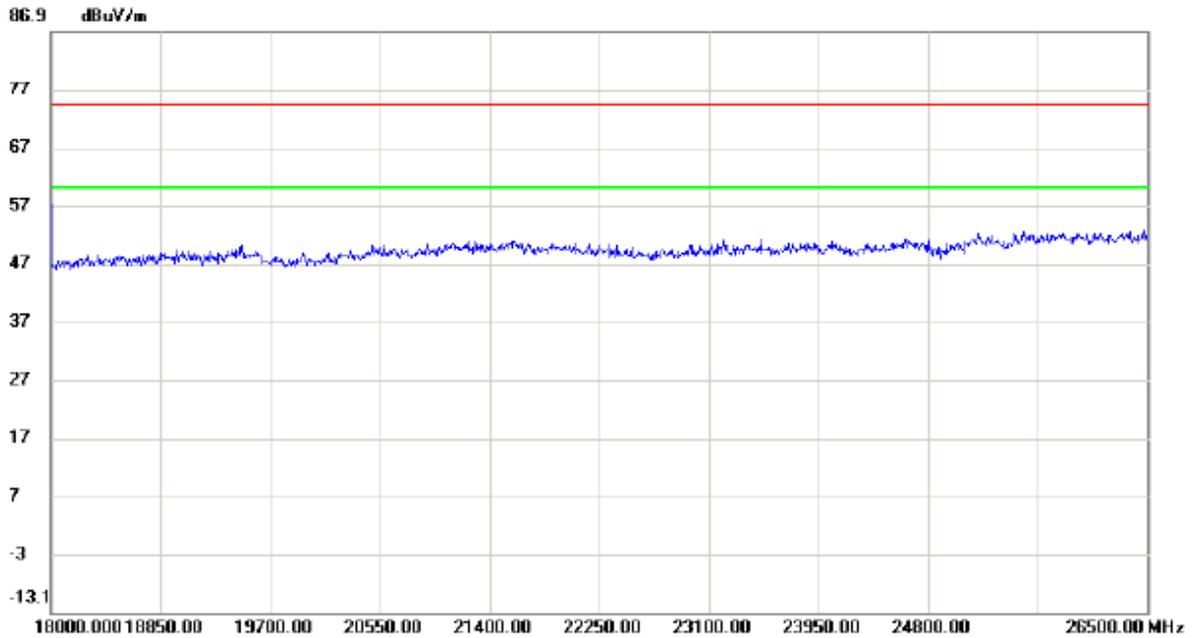


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

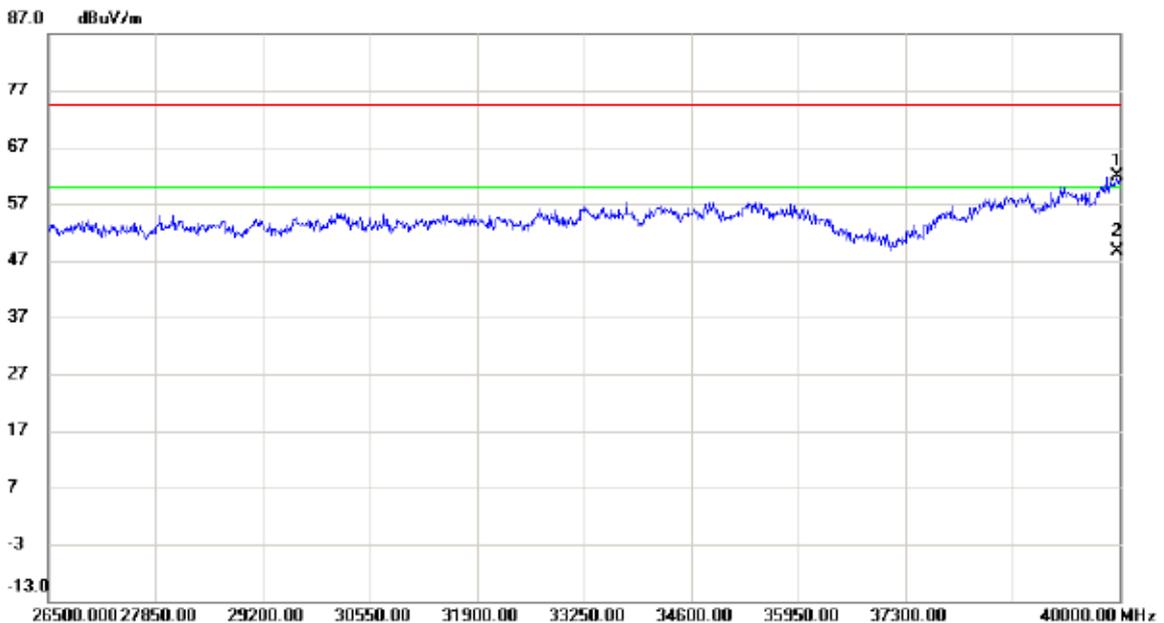

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39973.00	44.22	17.54	61.76	74.30	-12.54	peak	
2	*	39973.00	31.03	17.54	48.57	60.00	-11.43	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


### Vertical

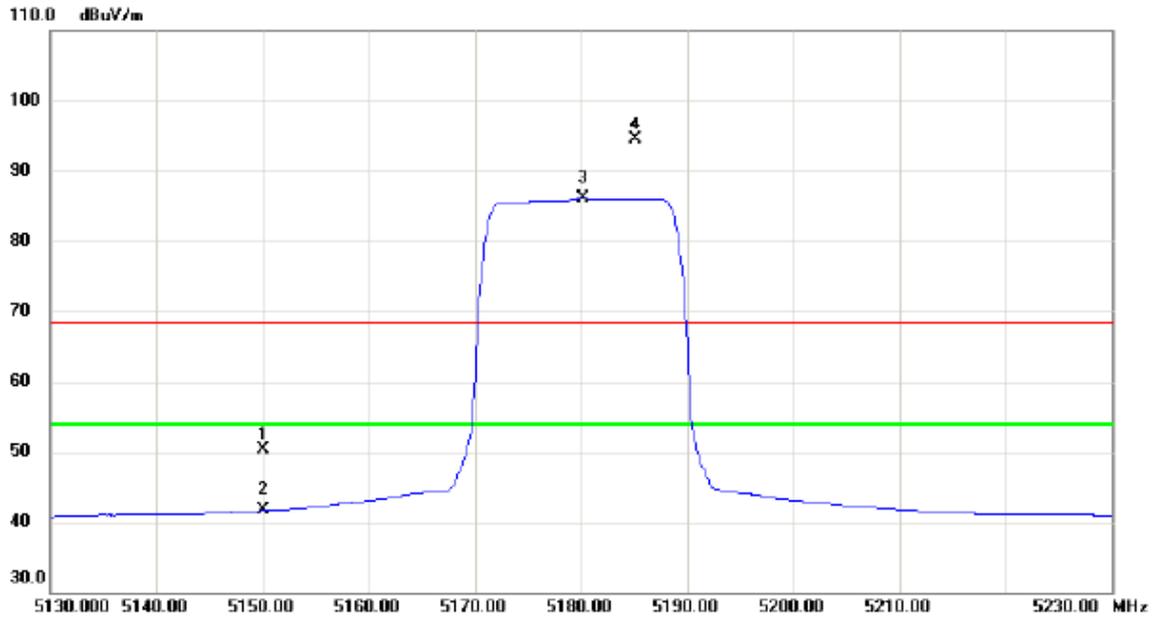


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.66	40.63	50.29	68.30	-18.01	peak	
2		5150.000	0.99	40.63	41.62	54.00	-12.38	AVG	
3	*	5180.200	45.33	40.72	86.05	54.00	32.05	AVG	No Limit
4	X	5185.200	53.77	40.74	94.51	68.30	26.21	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

### Vertical

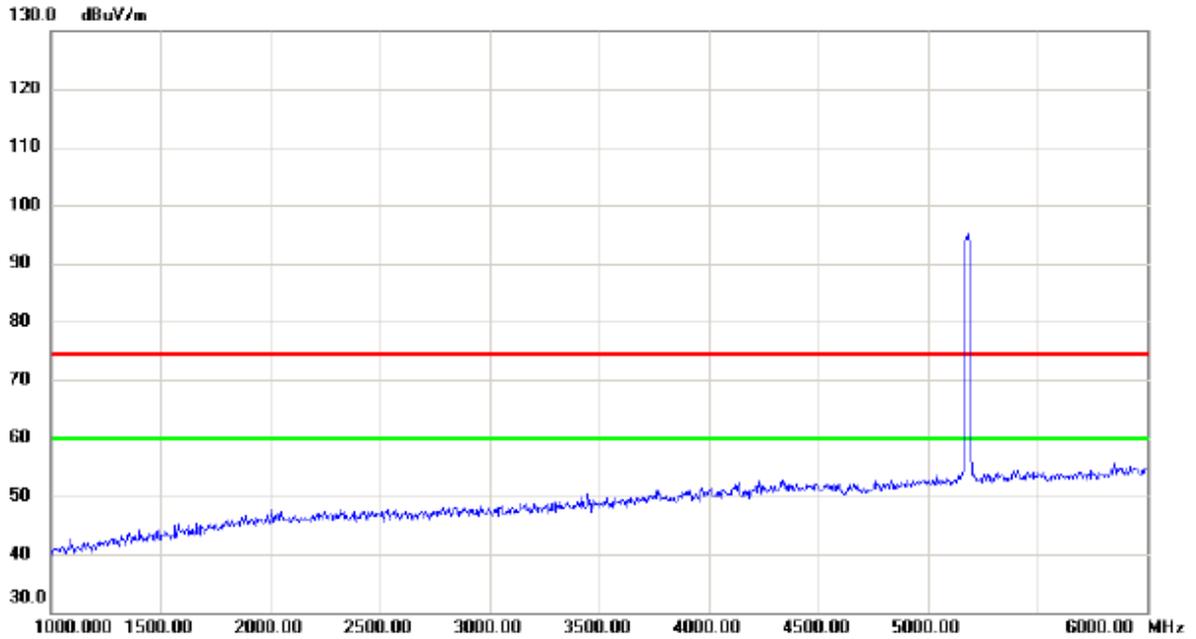


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

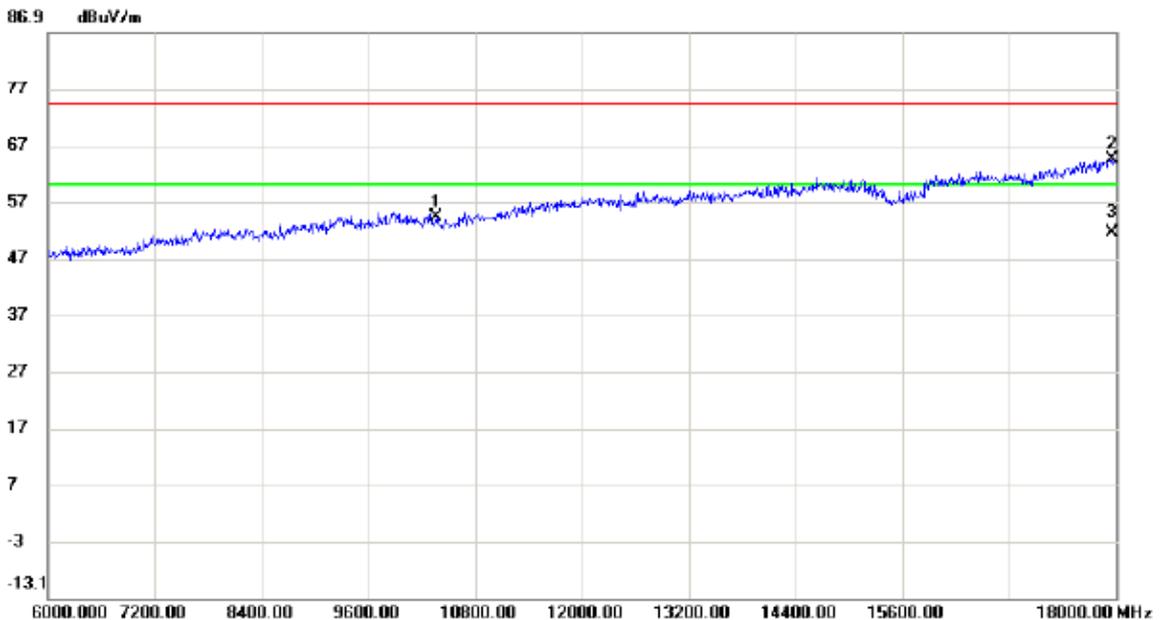


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	40.35	13.85	54.20	74.30	-20.10	peak	
2		17964.00	40.69	23.72	64.41	74.30	-9.89	peak	
3	*	17964.00	27.86	23.72	51.58	60.00	-8.42	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

### Vertical

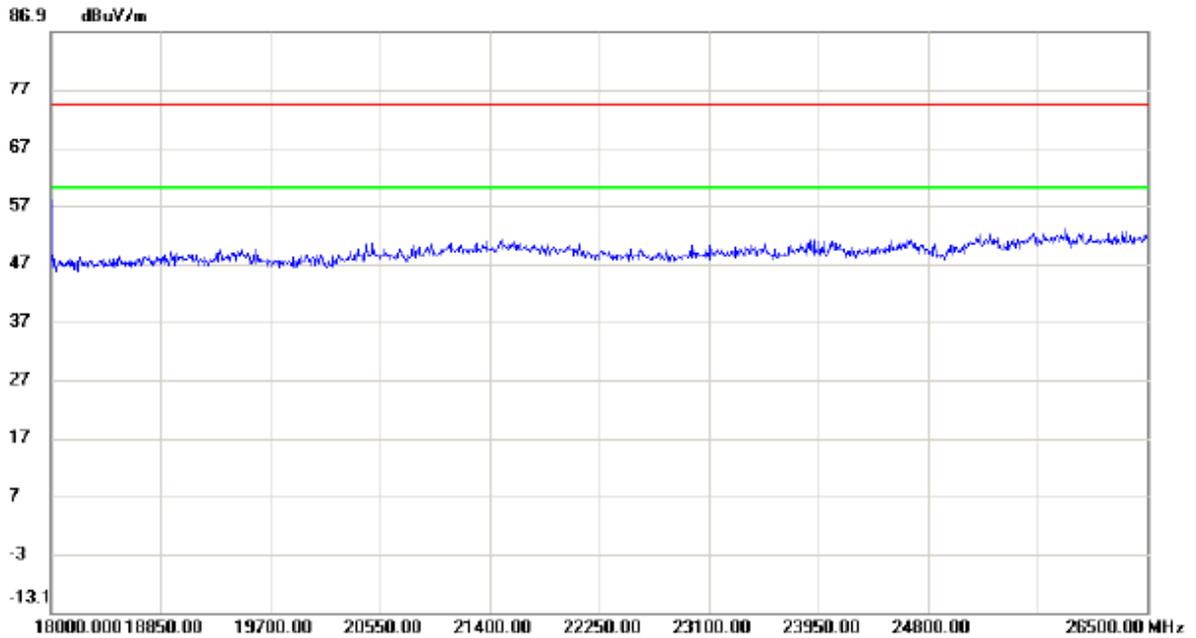


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

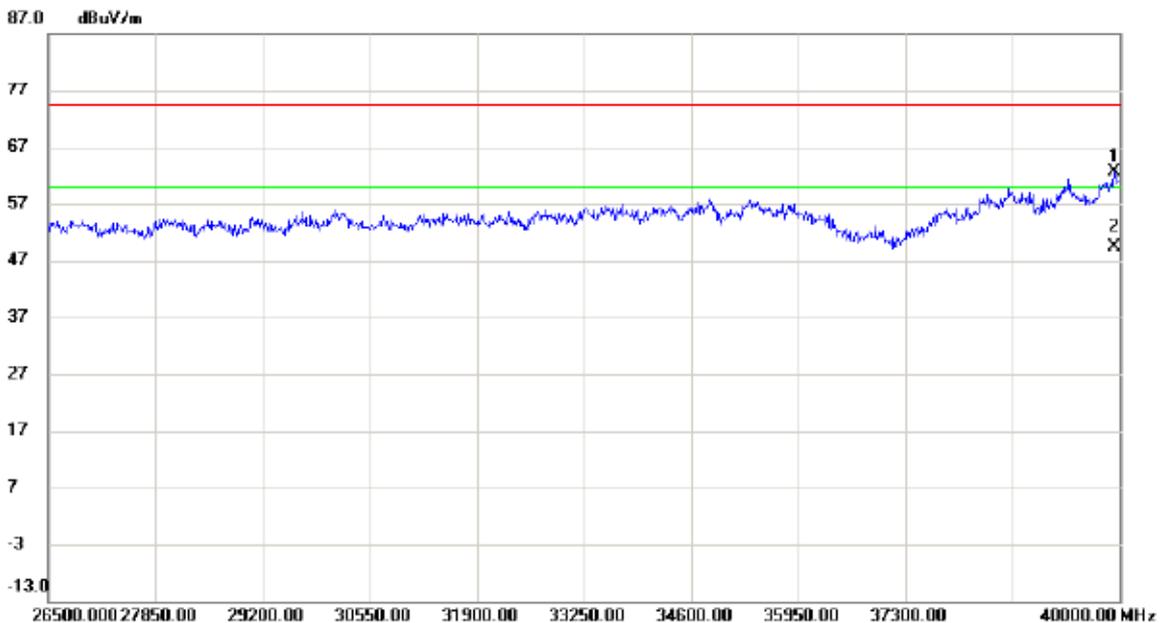

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39932.50	45.17	17.43	62.60	74.30	-11.70	peak	
2	*	39932.50	31.89	17.43	49.32	60.00	-10.68	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


### Horizontal

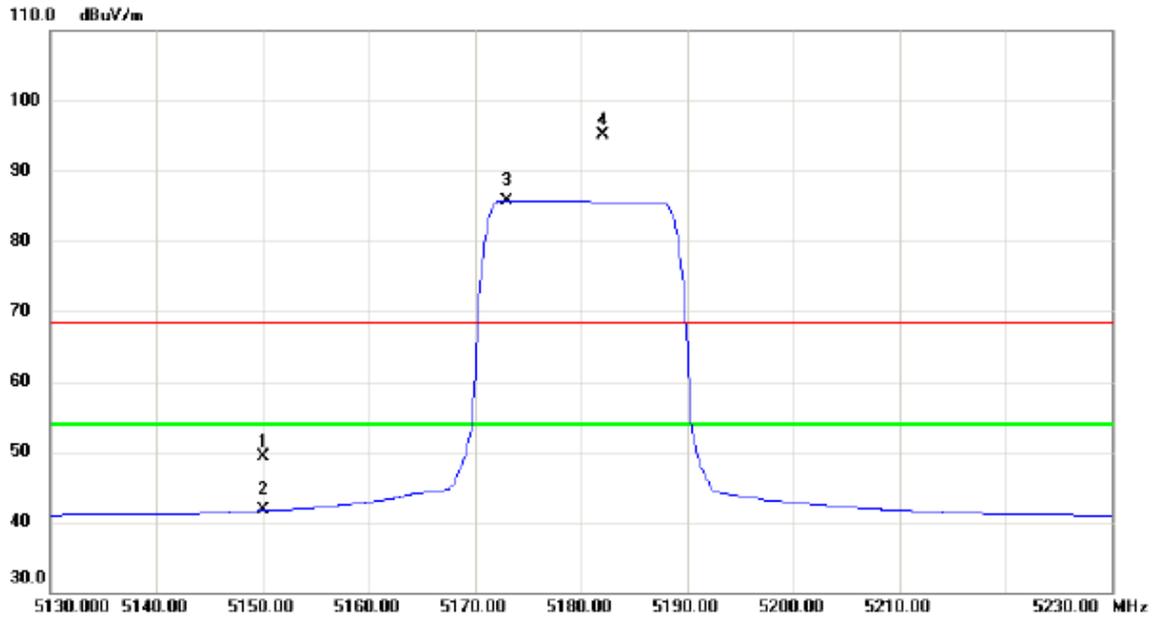


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	8.74	40.63	49.37	68.30	-18.93	peak	
2		5150.000	1.01	40.63	41.64	54.00	-12.36	AVG	
3	*	5173.000	45.07	40.71	85.78	54.00	31.78	AVG	No Limit
4	X	5182.000	54.43	40.73	95.16	68.30	26.86	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

### Horizontal

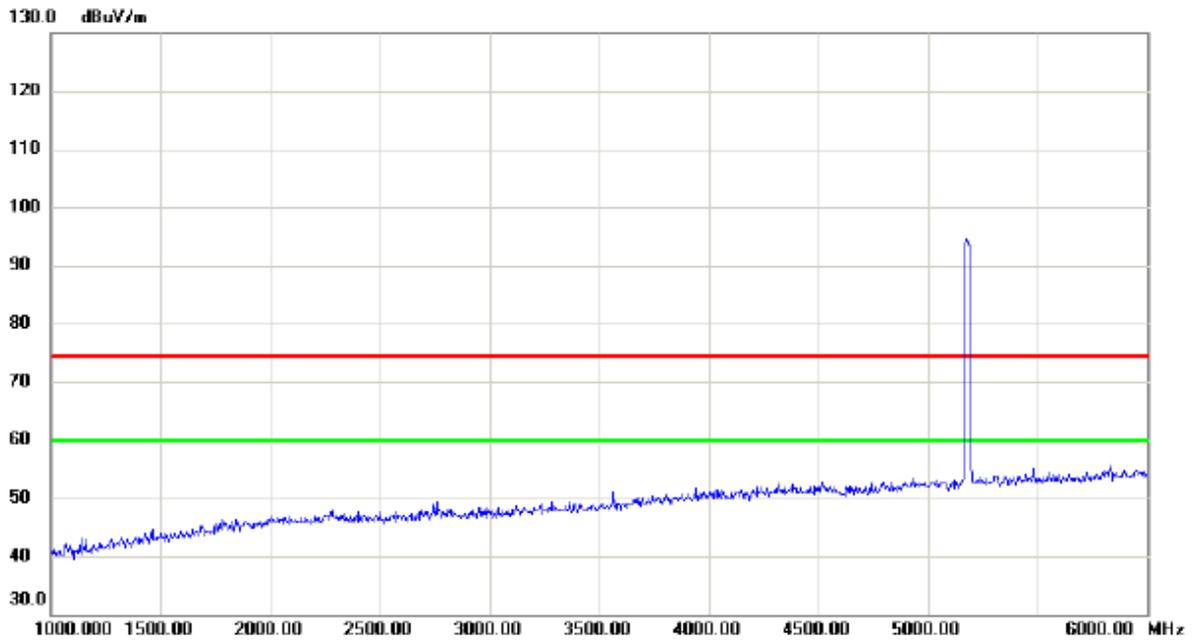


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

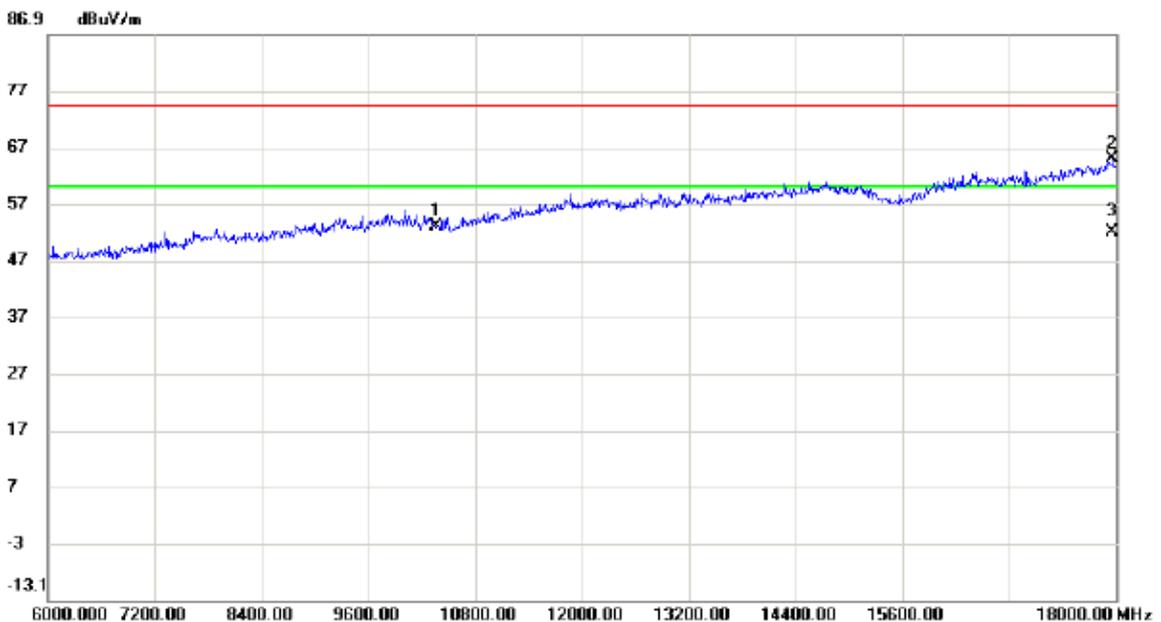


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	39.18	13.85	53.03	74.30	-21.27	peak	
2		17964.00	41.34	23.72	65.06	74.30	-9.24	peak	
3	*	17964.00	28.21	23.72	51.93	60.00	-8.07	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

### Horizontal

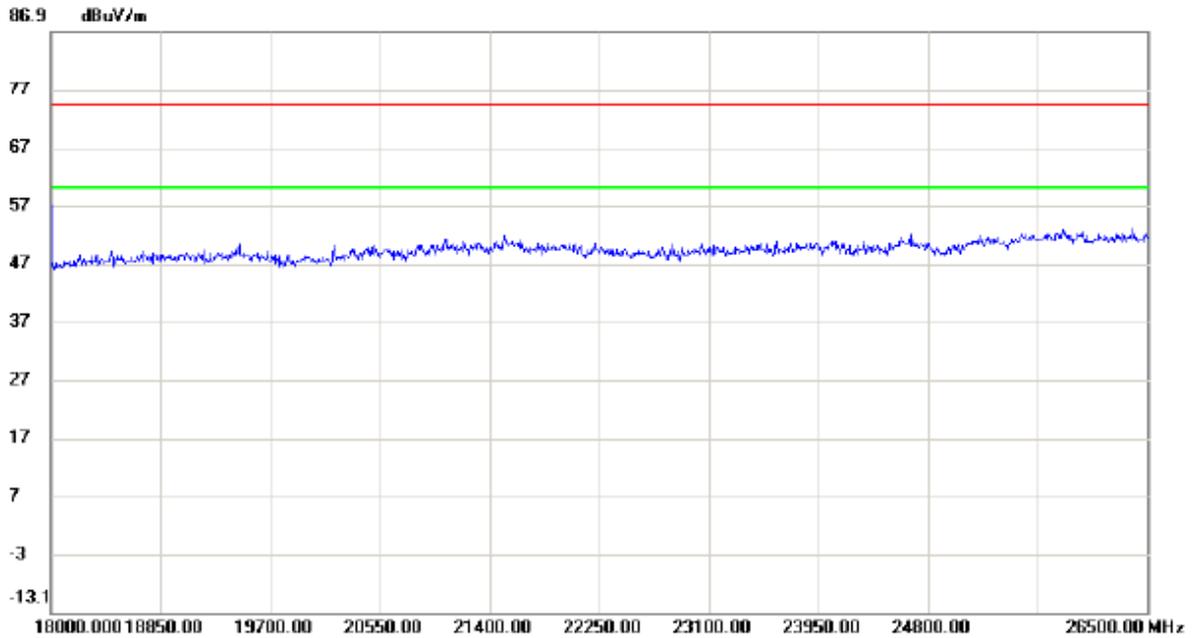


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

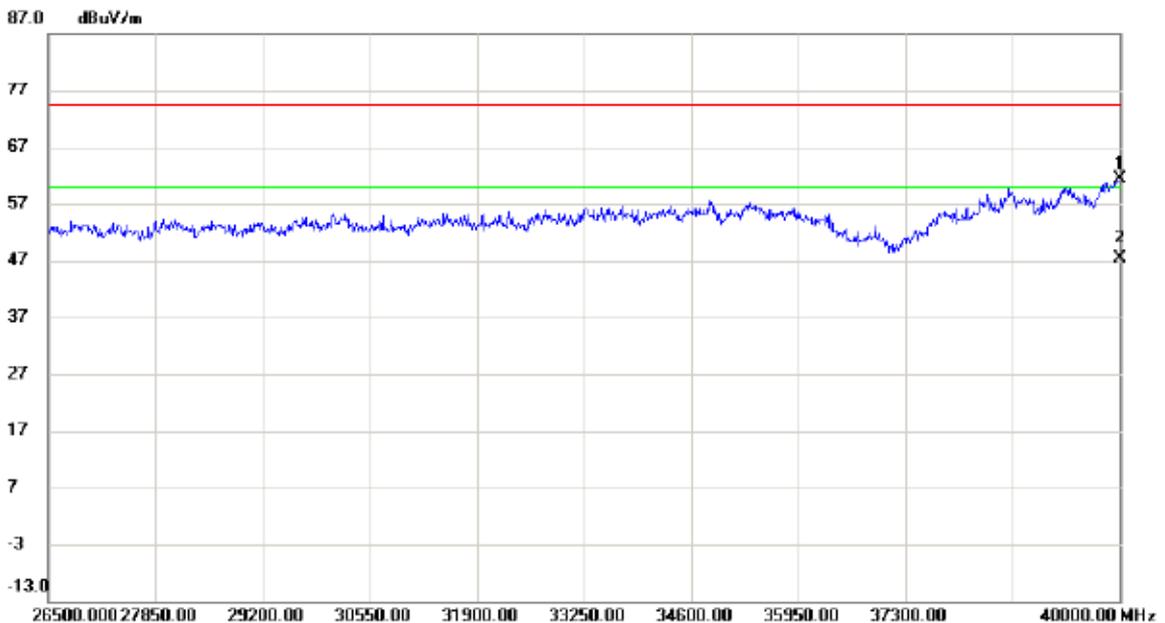

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	43.74	17.60	61.34	74.30	-12.96	peak	
2	*	40000.00	29.89	17.60	47.49	60.00	-12.51	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

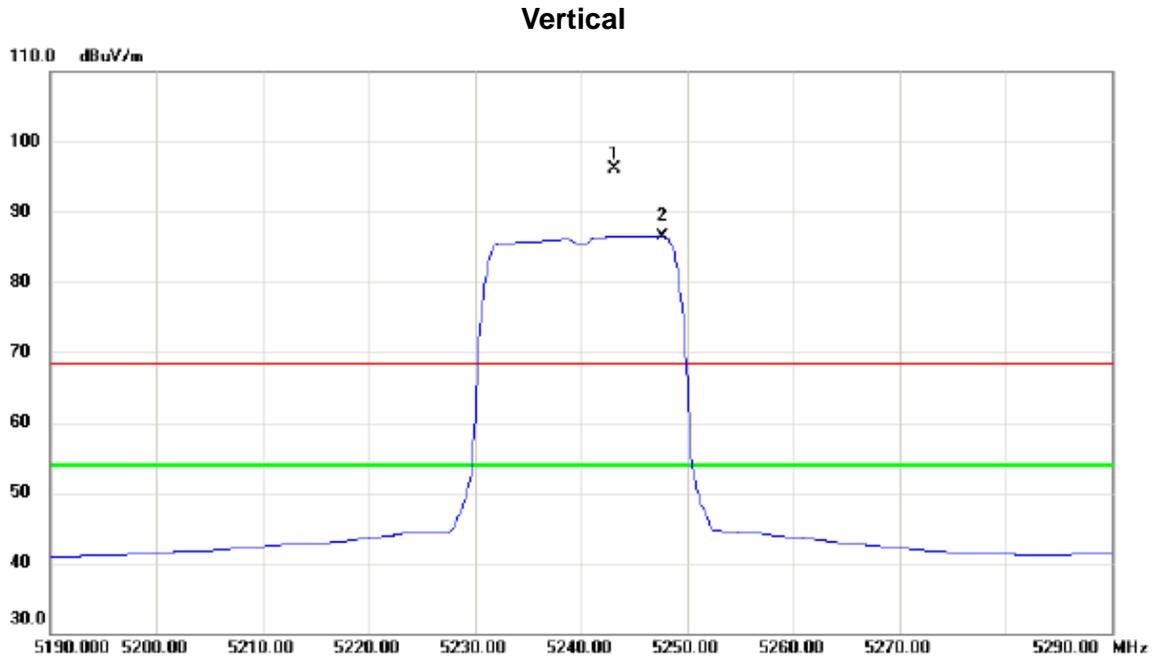


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5243.200	55.21	40.93	96.14	68.30	27.84	peak	No Limit
2	*	5247.600	45.48	40.94	86.42	54.00	32.42	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

### Vertical

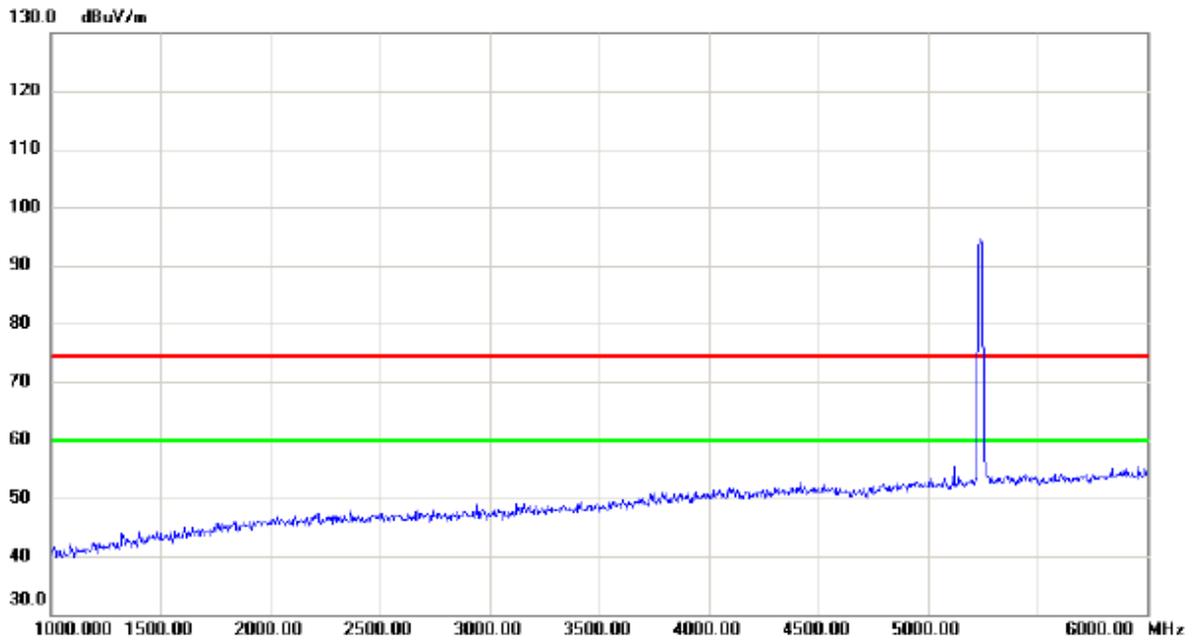


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

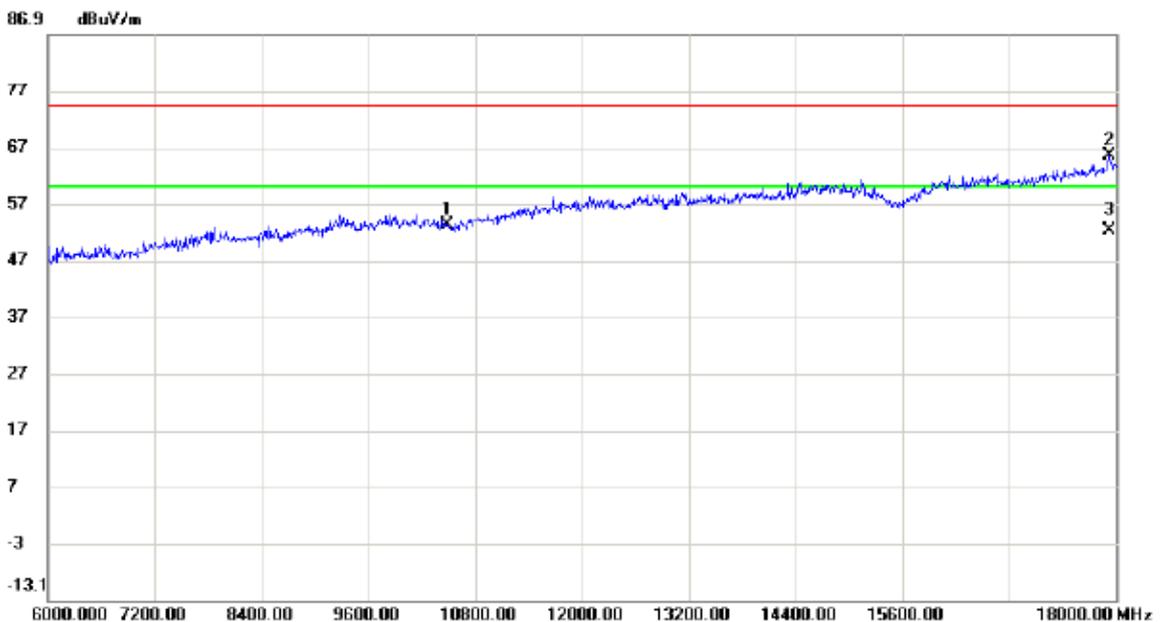


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	39.55	13.69	53.24	74.30	-21.06	peak	
2		17928.00	41.94	23.62	65.56	74.30	-8.74	peak	
3	*	17928.00	28.73	23.62	52.35	60.00	-7.65	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

### Vertical

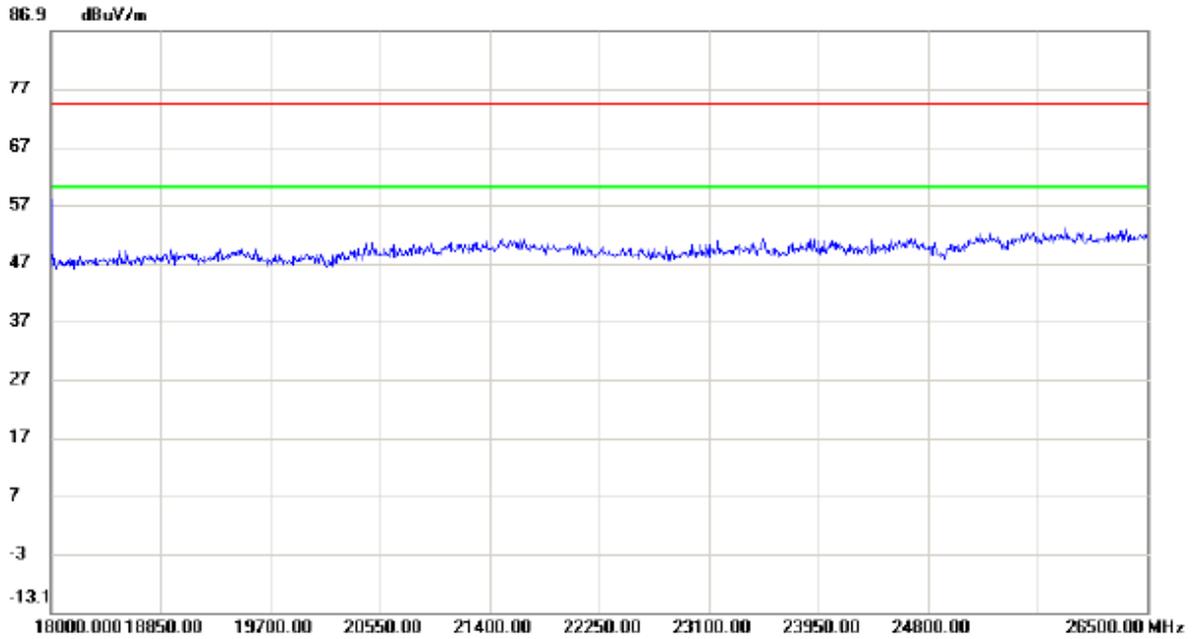


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

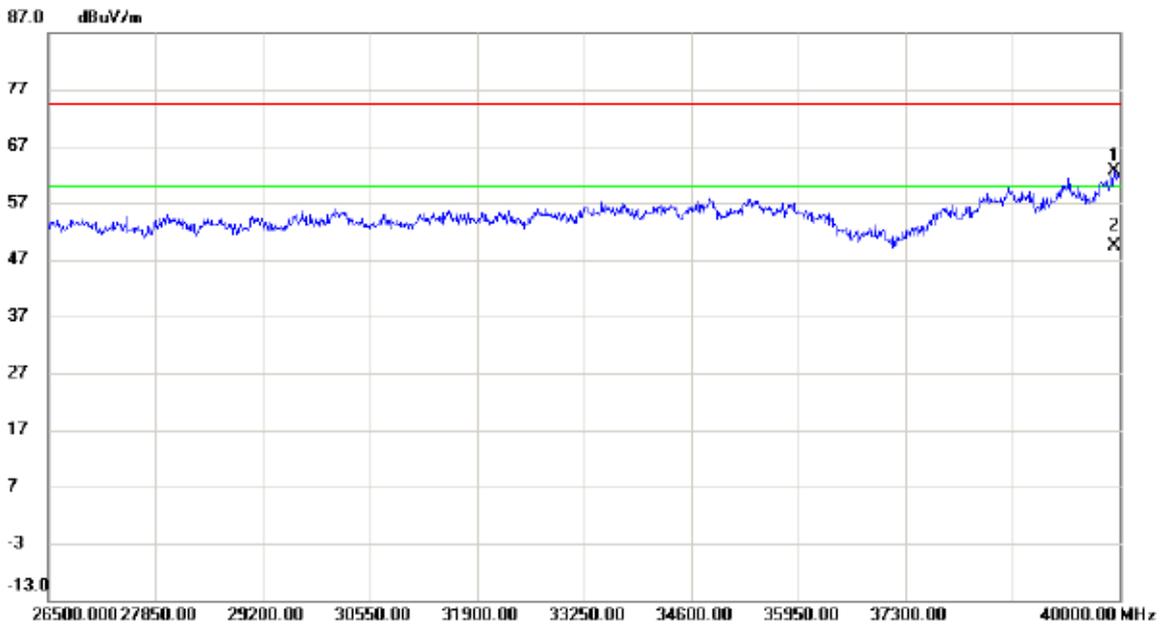

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39932.50	45.17	17.43	62.60	74.30	-11.70	peak	
2	*	39932.50	31.88	17.43	49.31	60.00	-10.69	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


### Horizontal

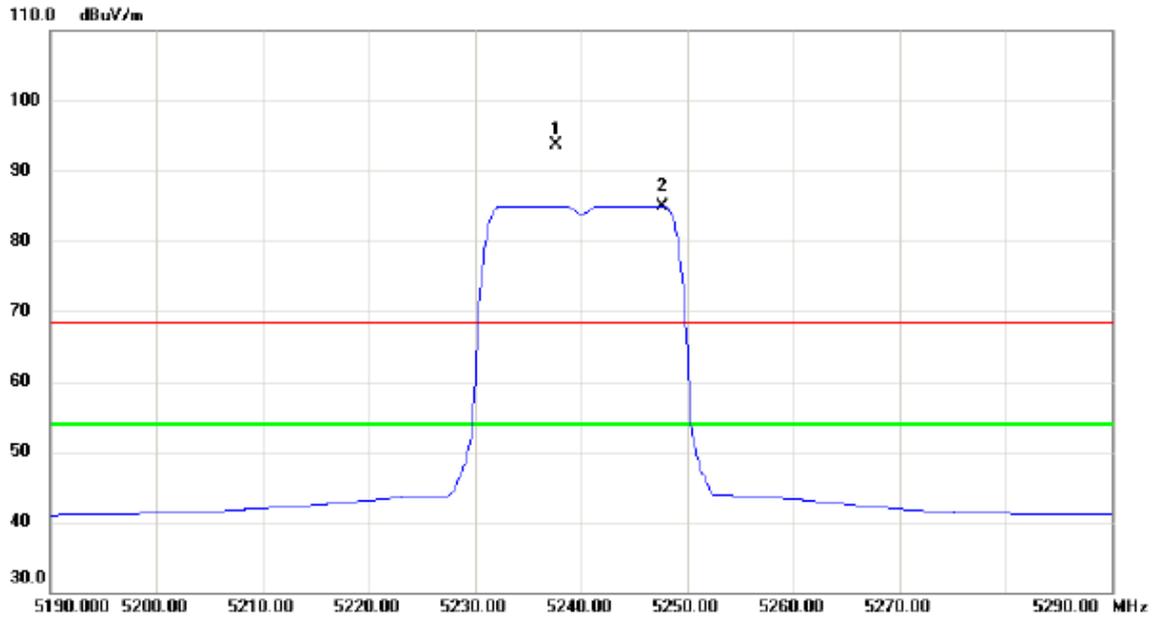

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5237.600	52.84	40.91	93.75	68.30	25.45	peak	No Limit
2	*	5247.600	44.04	40.94	84.98	54.00	30.98	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

### Horizontal

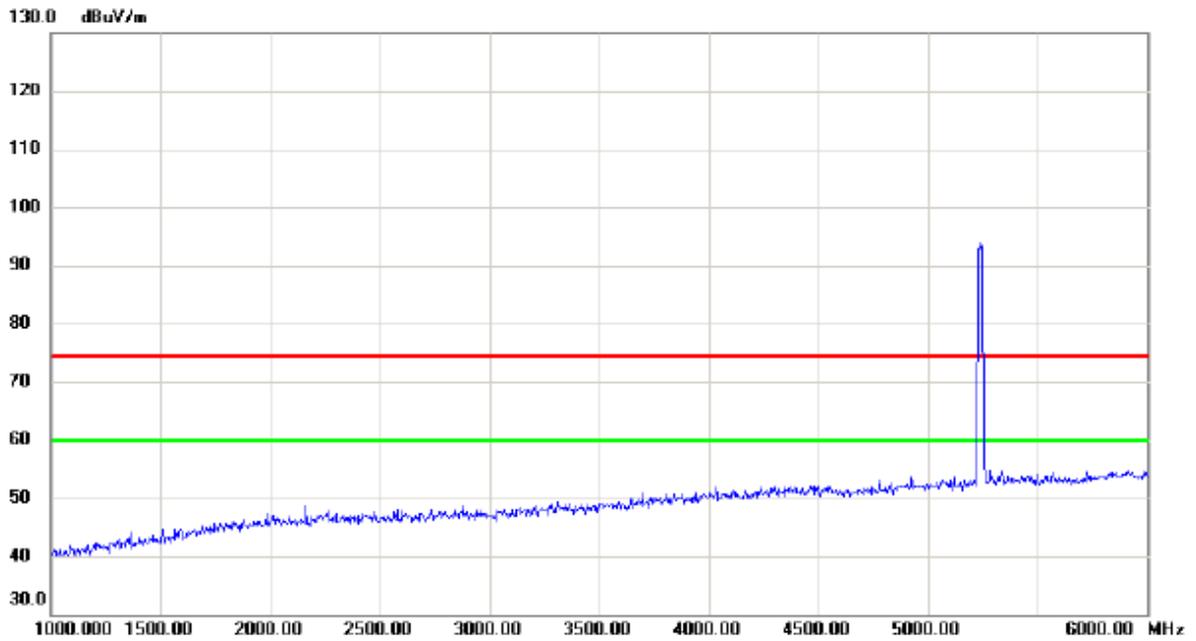


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	39.70	13.69	53.39	74.30	-20.91	peak	
2		17916.00	41.32	23.58	64.90	74.30	-9.40	peak	
3	*	17916.00	27.41	23.58	50.99	60.00	-9.01	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

### Horizontal

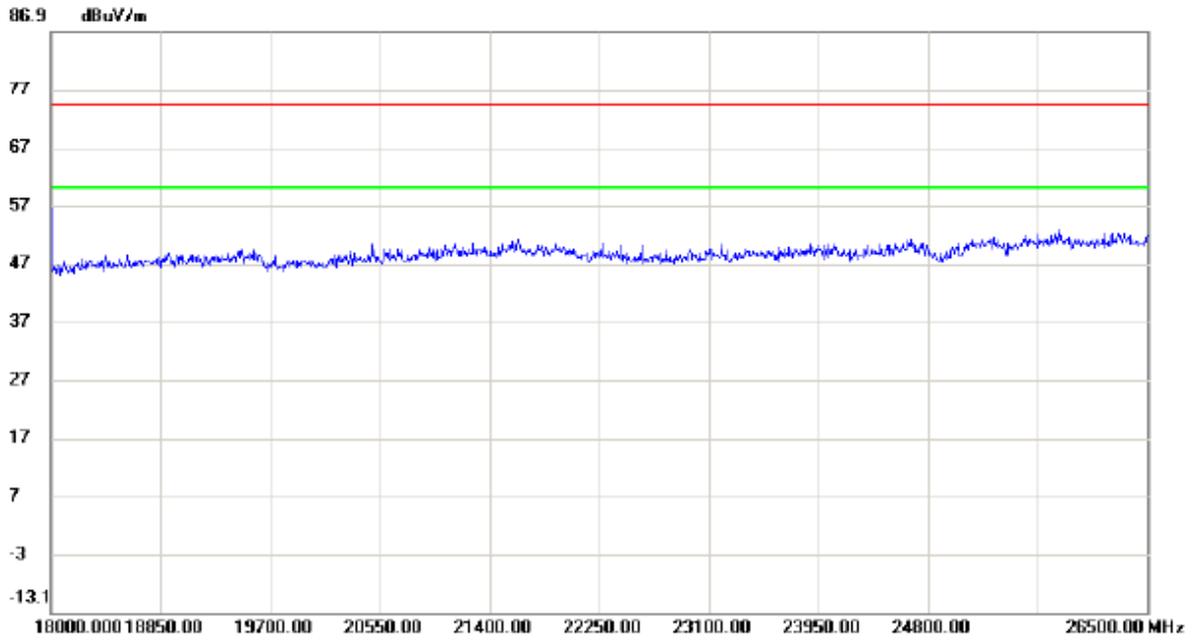


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

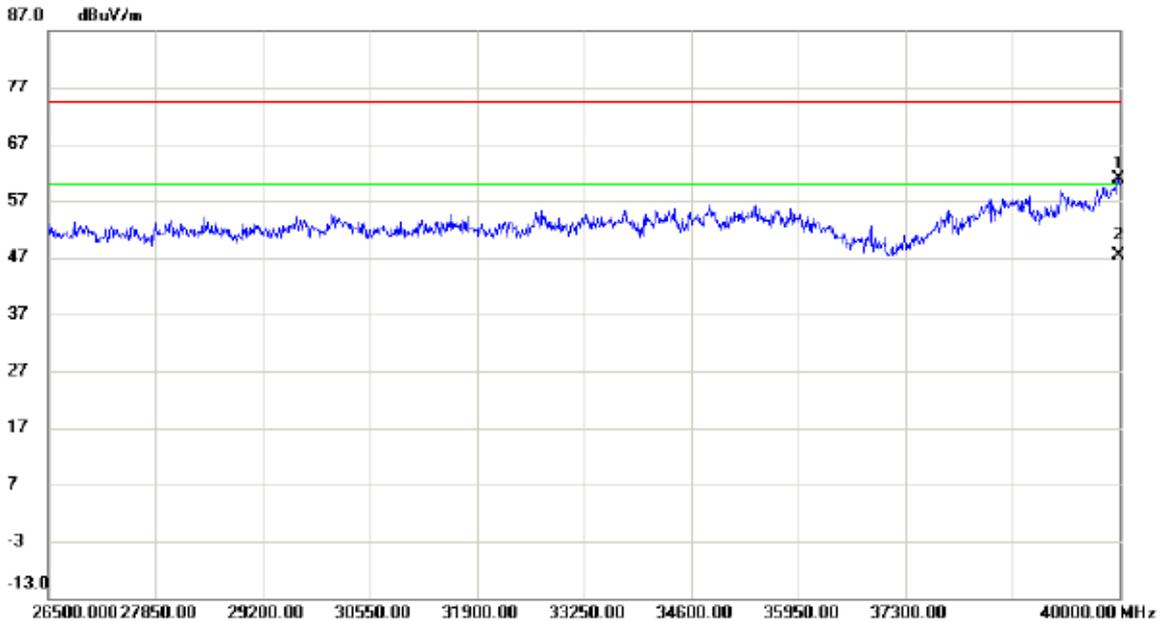

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39986.50	43.26	17.56	60.82	74.30	-13.48	peak	
2	*	39986.50	29.78	17.56	47.34	60.00	-12.66	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


### Vertical

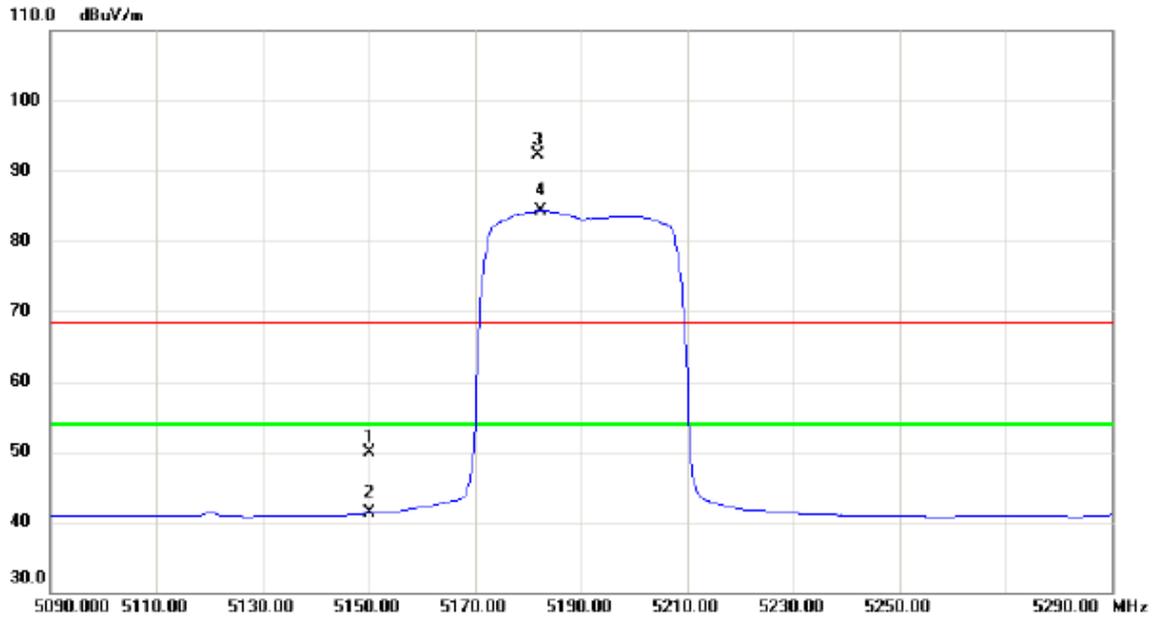


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.24	40.63	49.87	68.30	-18.43	peak	
2		5150.000	0.62	40.63	41.25	54.00	-12.75	AVG	
3	X	5181.800	51.49	40.73	92.22	68.30	23.92	peak	No Limit
4	*	5182.400	43.53	40.73	84.26	54.00	30.26	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

### Vertical

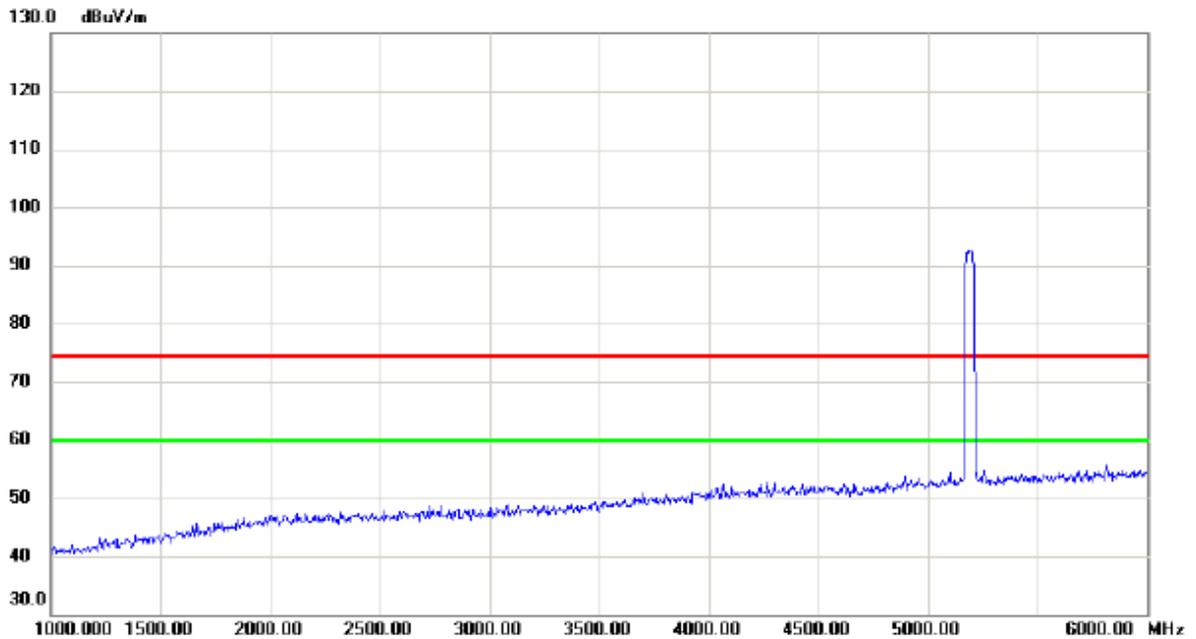


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

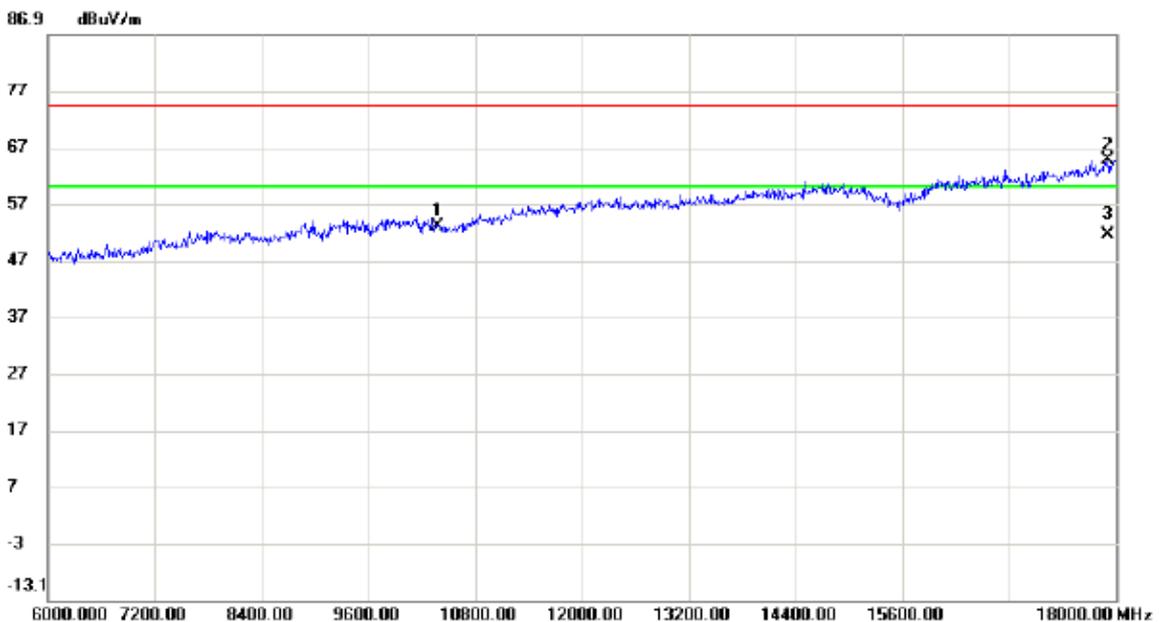


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10380.00	39.17	13.83	53.00	74.30	-21.30	peak	
2		17916.00	41.23	23.58	64.81	74.30	-9.49	peak	
3	*	17916.00	28.04	23.58	51.62	60.00	-8.38	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

### Vertical

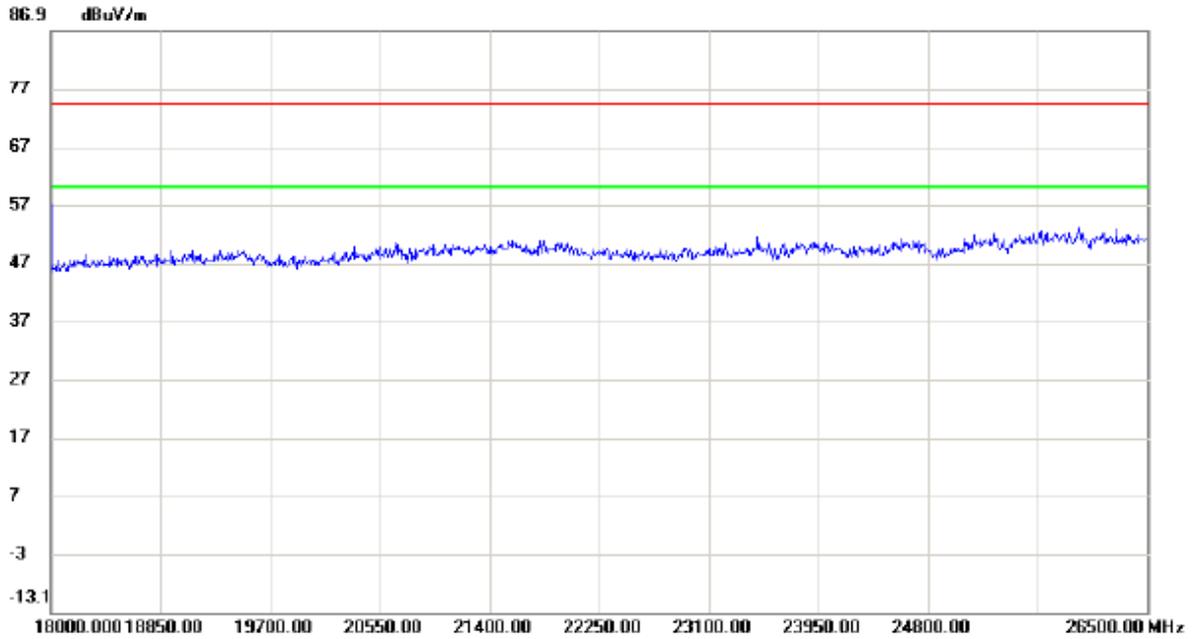


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

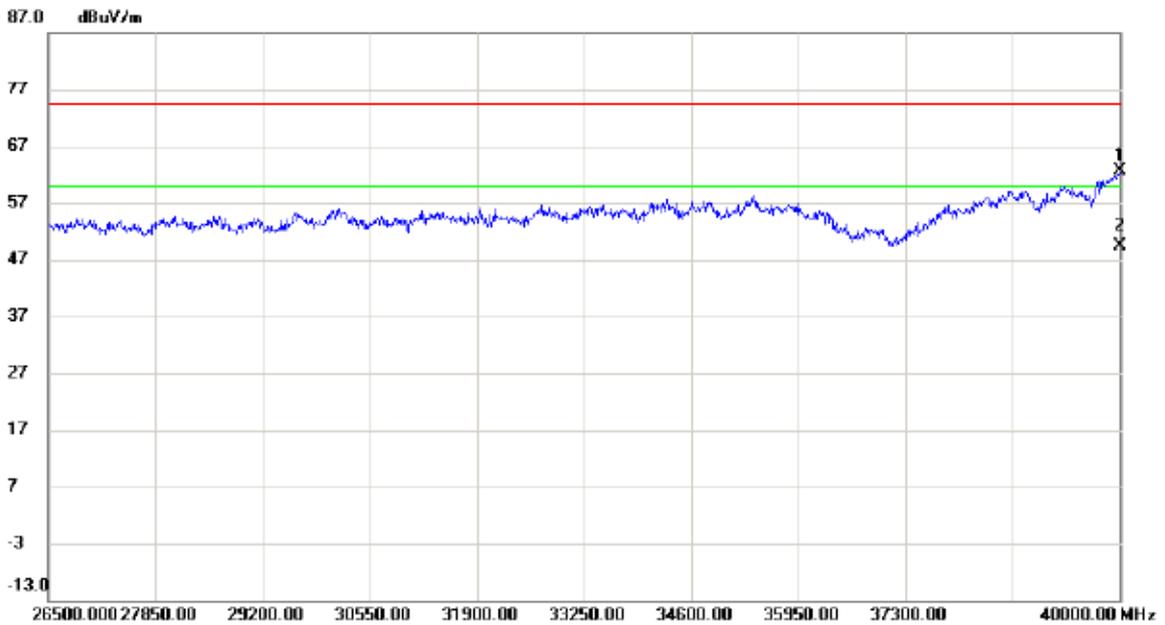

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	45.09	17.60	62.69	74.30	-11.61	peak	
2	*	40000.00	31.76	17.60	49.36	60.00	-10.64	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


### Horizontal

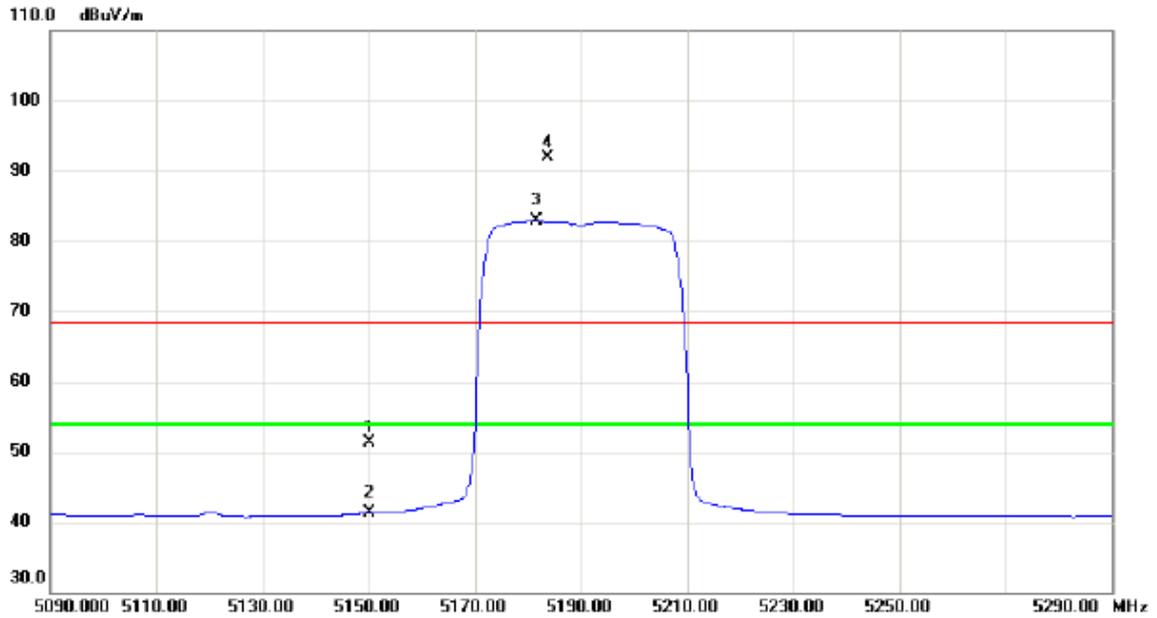


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	10.67	40.63	51.30	68.30	-17.00	peak	
2		5150.000	0.65	40.63	41.28	54.00	-12.72	AVG	
3	*	5181.600	42.11	40.73	82.84	54.00	28.84	AVG	No Limit
4	X	5183.800	51.21	40.74	91.95	68.30	23.65	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

### Horizontal

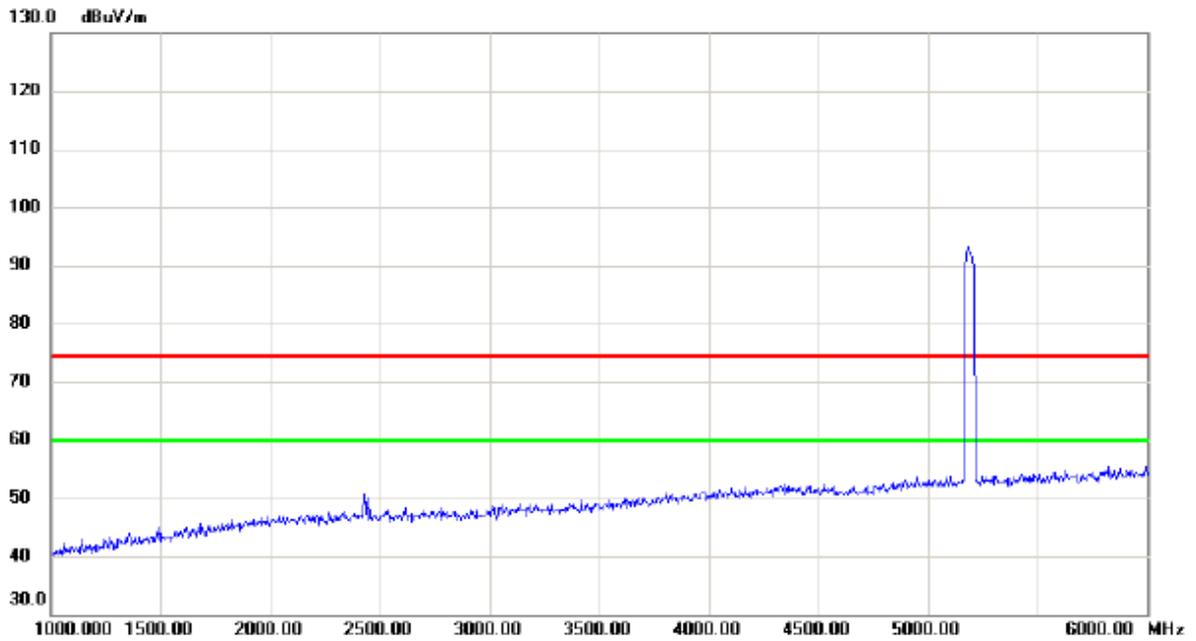


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

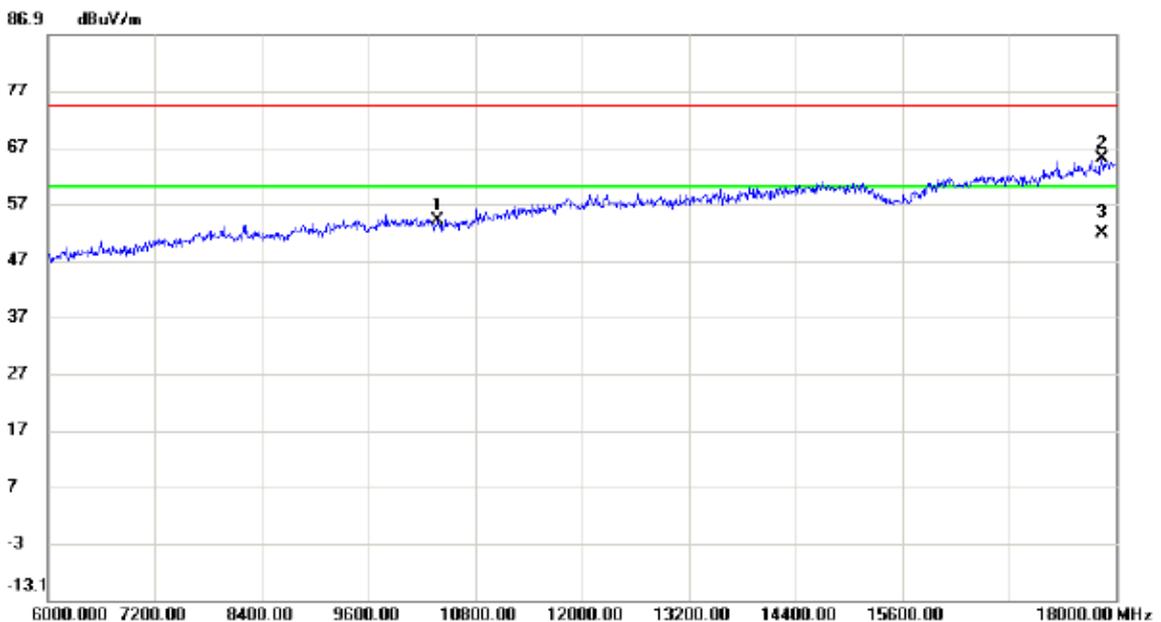


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10380.00	40.20	13.83	54.03	74.30	-20.27	peak	
2		17844.00	41.61	23.37	64.98	74.30	-9.32	peak	
3	*	17844.00	28.47	23.37	51.84	60.00	-8.16	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

### Horizontal

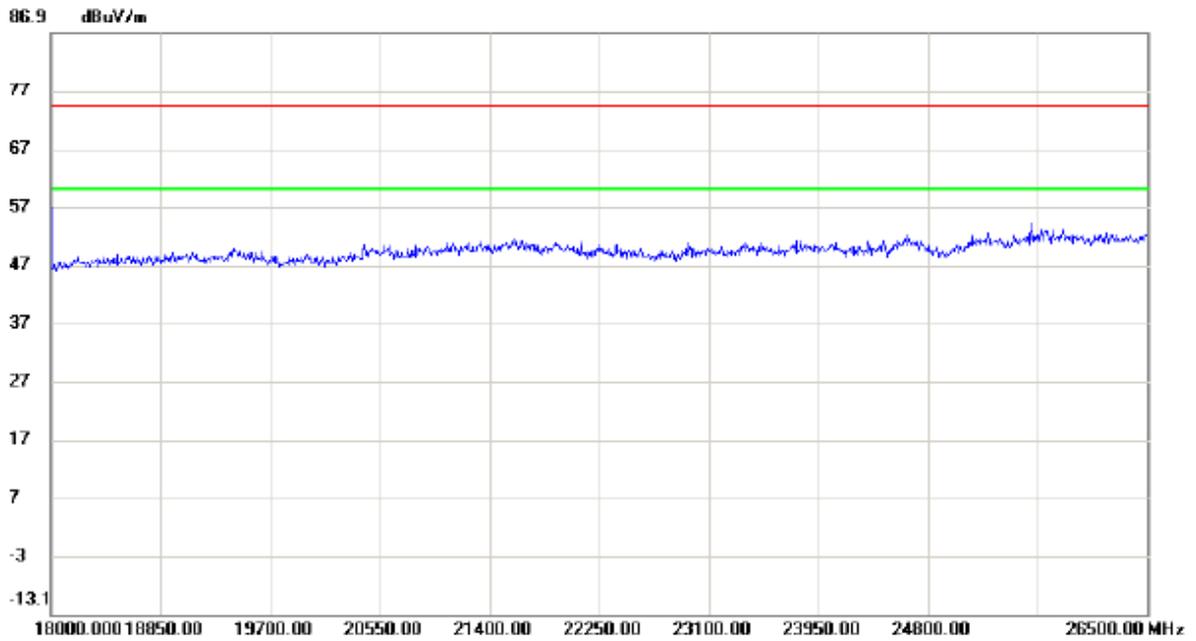


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

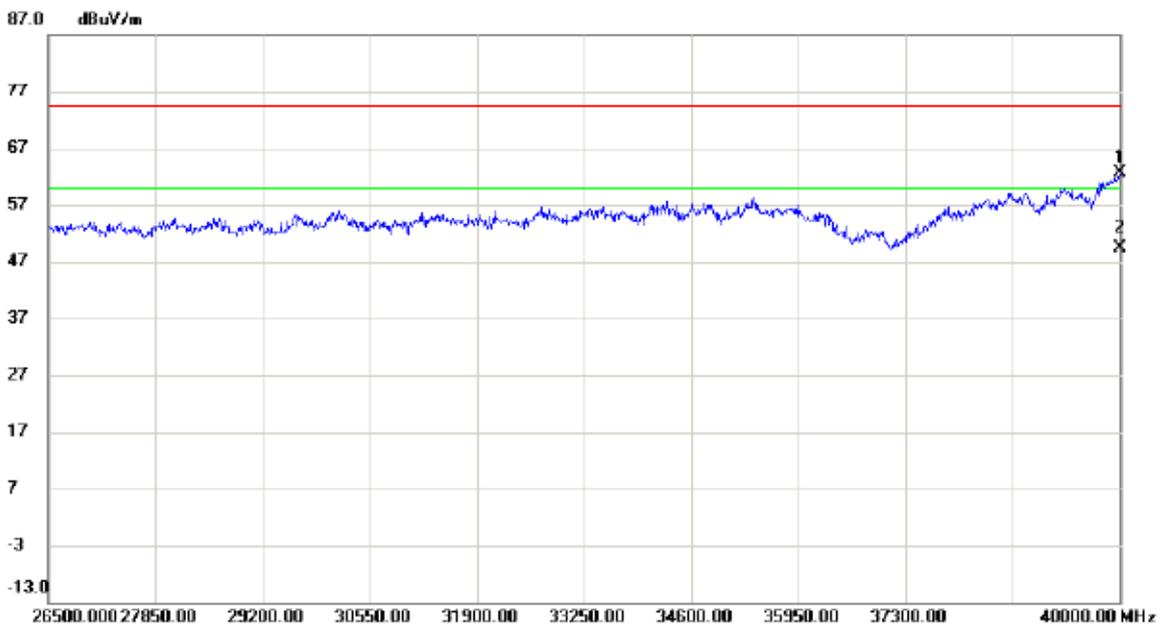

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	45.09	17.60	62.69	74.30	-11.61	peak	
2	*	40000.00	31.75	17.60	49.35	60.00	-10.65	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


### Vertical

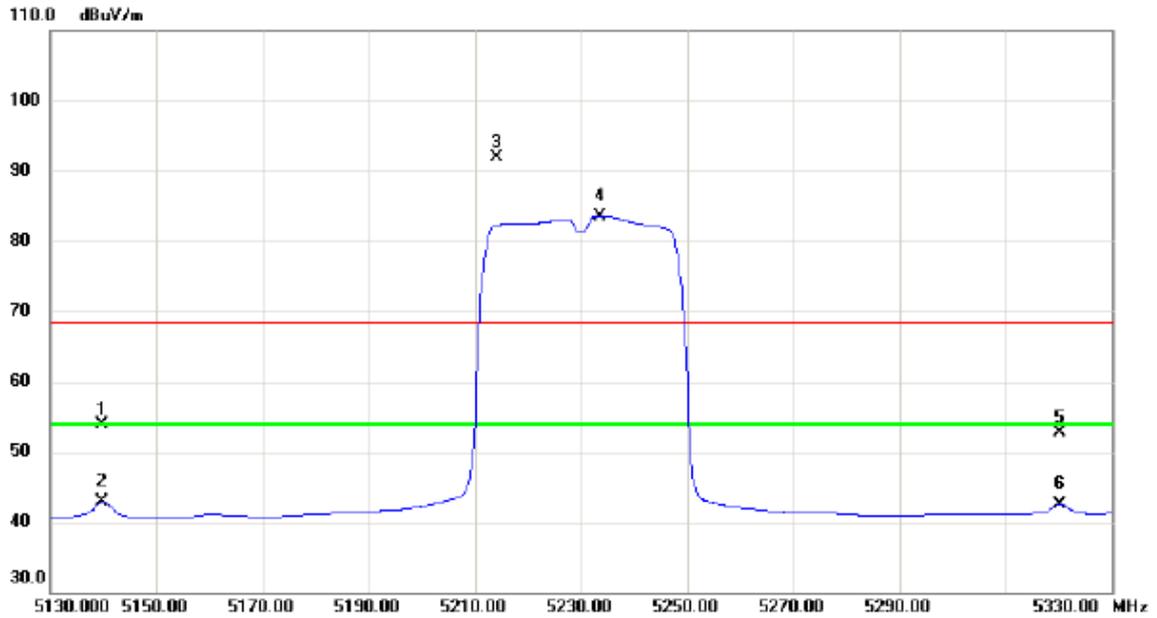


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5139.800	13.40	40.60	54.00	68.30	-14.30	peak	
2		5139.800	2.28	40.60	42.88	54.00	-11.12	AVG	
3	X	5214.200	50.99	40.83	91.82	68.30	23.52	peak	No Limit
4	*	5233.600	42.68	40.90	83.58	54.00	29.58	AVG	No Limit
5		5320.200	11.49	41.19	52.68	68.30	-15.62	peak	
6		5320.200	1.31	41.19	42.50	54.00	-11.50	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

### Vertical

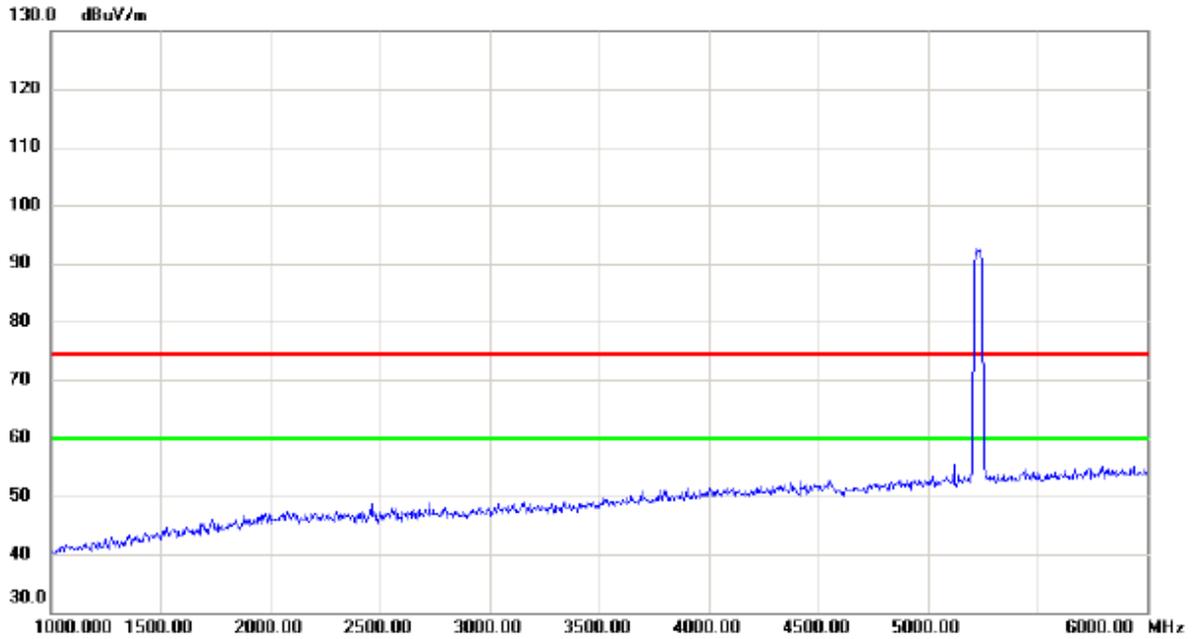


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

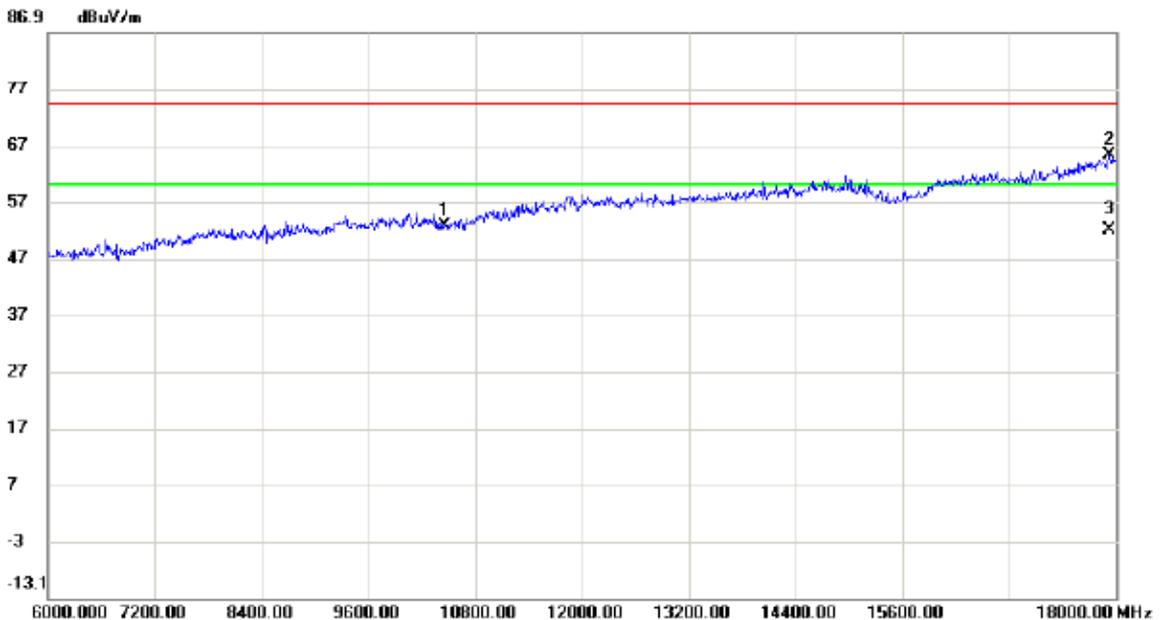


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10460.00	38.96	13.71	52.67	74.30	-21.63	peak	
2		17928.00	41.58	23.62	65.20	74.30	-9.10	peak	
3	*	17928.00	28.31	23.62	51.93	60.00	-8.07	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

### Vertical

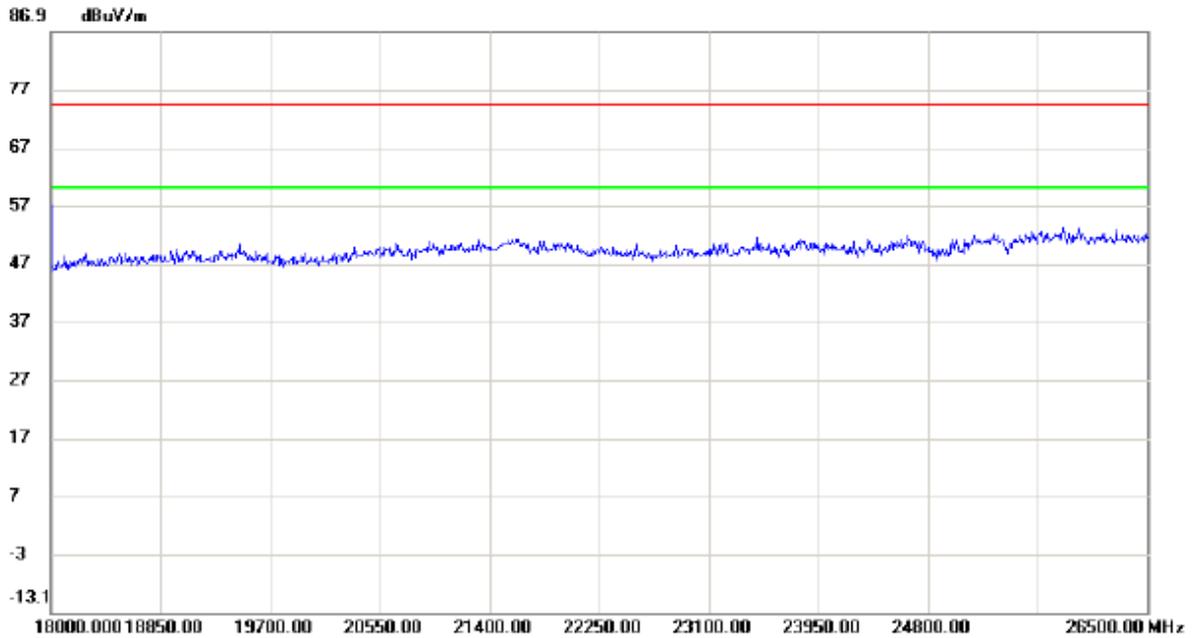


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

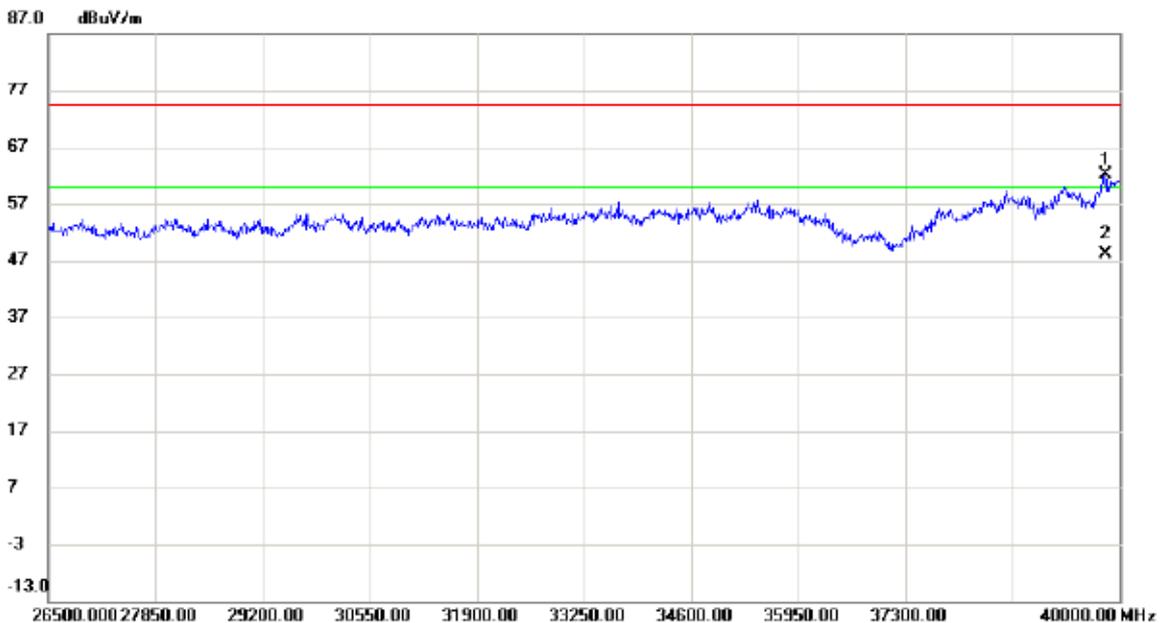

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39824.50	44.97	17.17	62.14	74.30	-12.16	peak	
2	*	39824.50	30.84	17.17	48.01	60.00	-11.99	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


### Horizontal

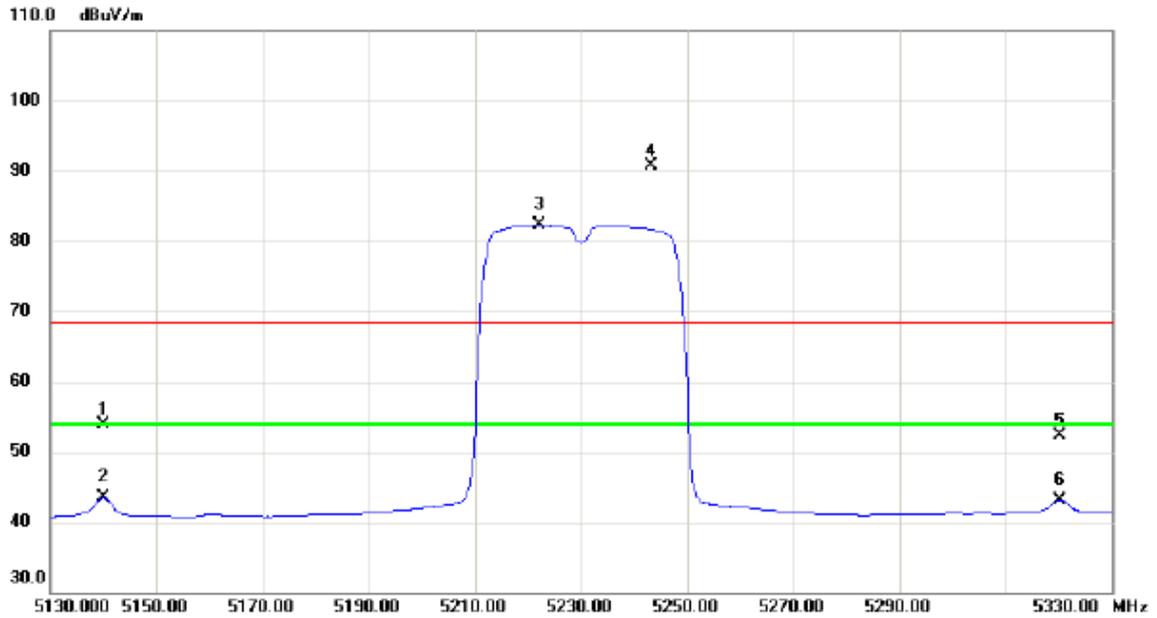


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5140.000	13.38	40.60	53.98	68.30	-14.32	peak	
2		5140.000	2.83	40.60	43.43	54.00	-10.57	AVG	
3	*	5222.000	41.41	40.86	82.27	54.00	28.27	AVG	No Limit
4	X	5243.200	49.79	40.93	90.72	68.30	22.42	peak	No Limit
5		5320.200	11.03	41.19	52.22	68.30	-16.08	peak	
6		5320.200	1.97	41.19	43.16	54.00	-10.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

### Horizontal

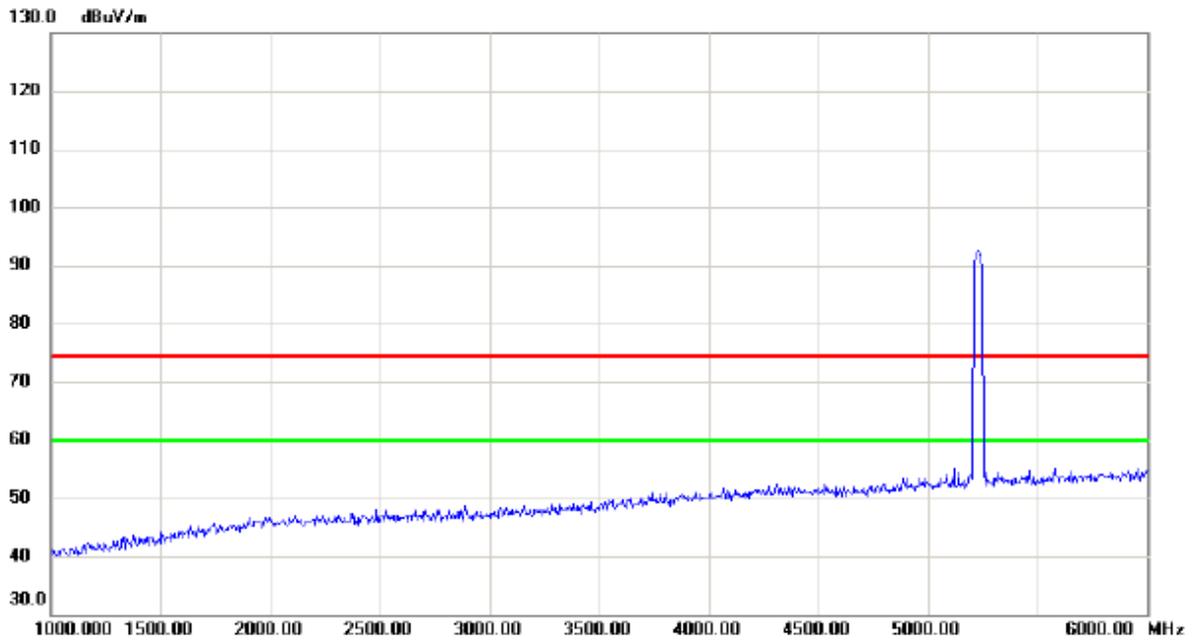


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

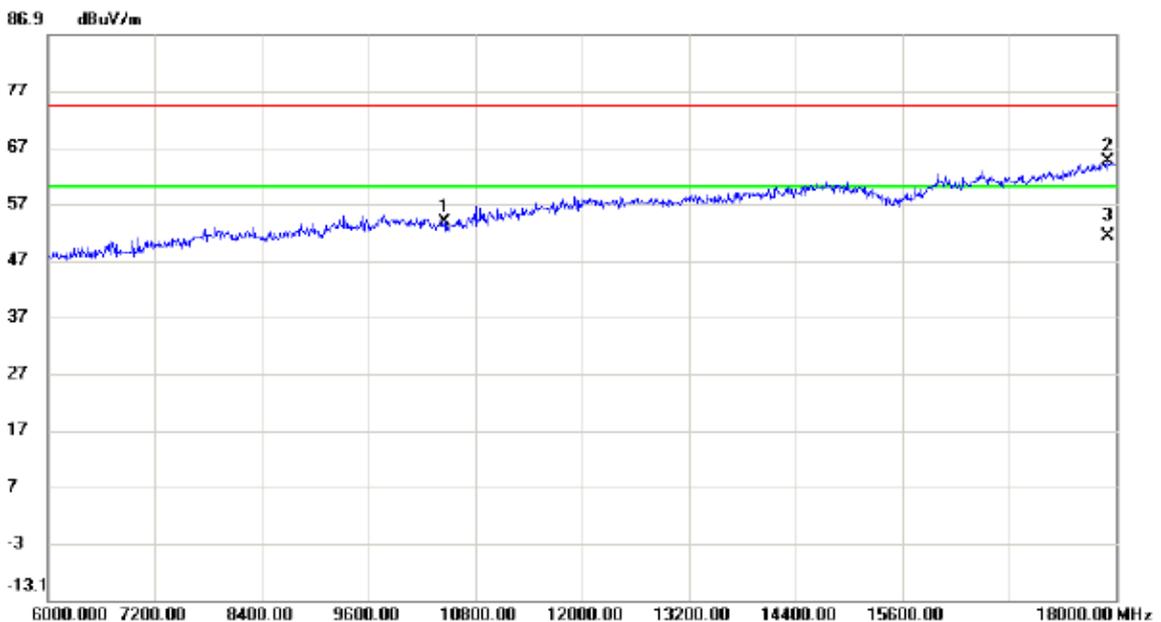

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10460.00	40.11	13.71	53.82	74.30	-20.48	peak	
2		17916.00	40.95	23.58	64.53	74.30	-9.77	peak	
3	*	17916.00	27.76	23.58	51.34	60.00	-8.66	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

### Horizontal

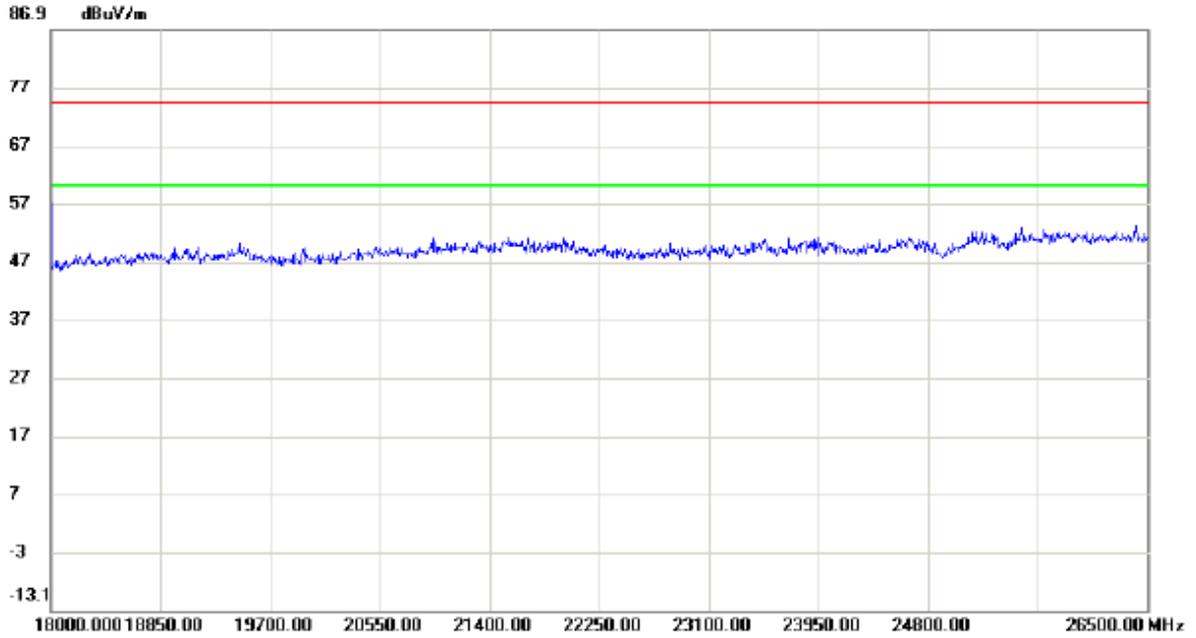


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39824.50	44.97	17.17	62.14	74.30	-12.16	peak	
2		39824.50	30.18	17.17	47.35	60.00	-12.65	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


### Vertical

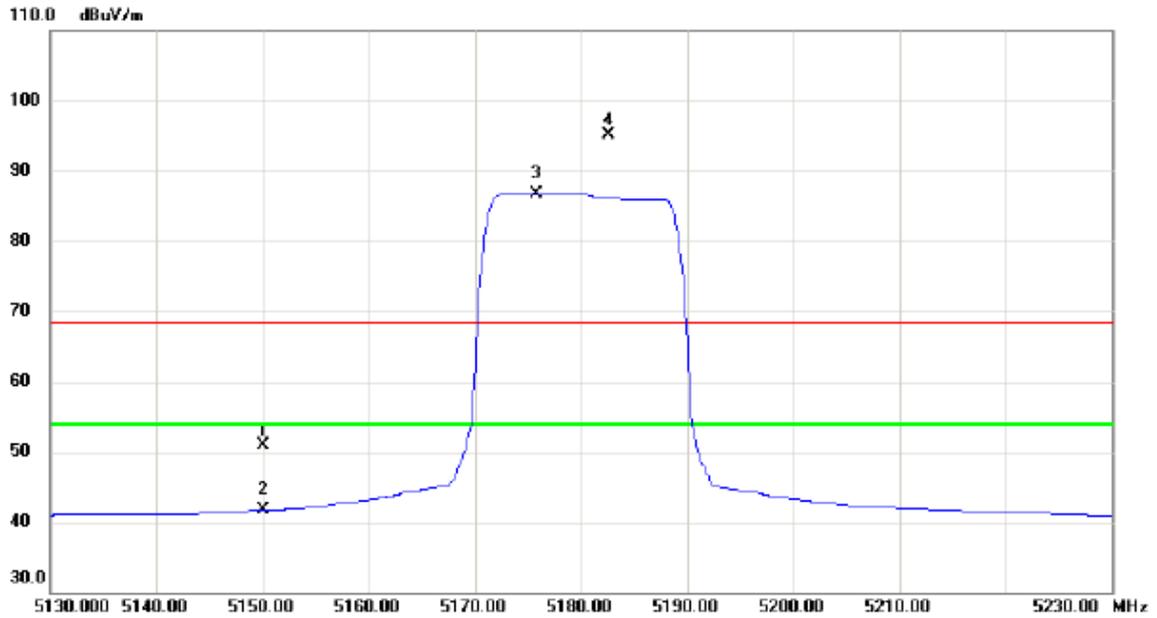


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	10.30	40.63	50.93	68.30	-17.37	peak	
2		5150.000	1.05	40.63	41.68	54.00	-12.32	AVG	
3	*	5175.800	46.07	40.71	86.78	54.00	32.78	AVG	No Limit
4	X	5182.600	54.28	40.73	95.01	68.30	26.71	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Vertical

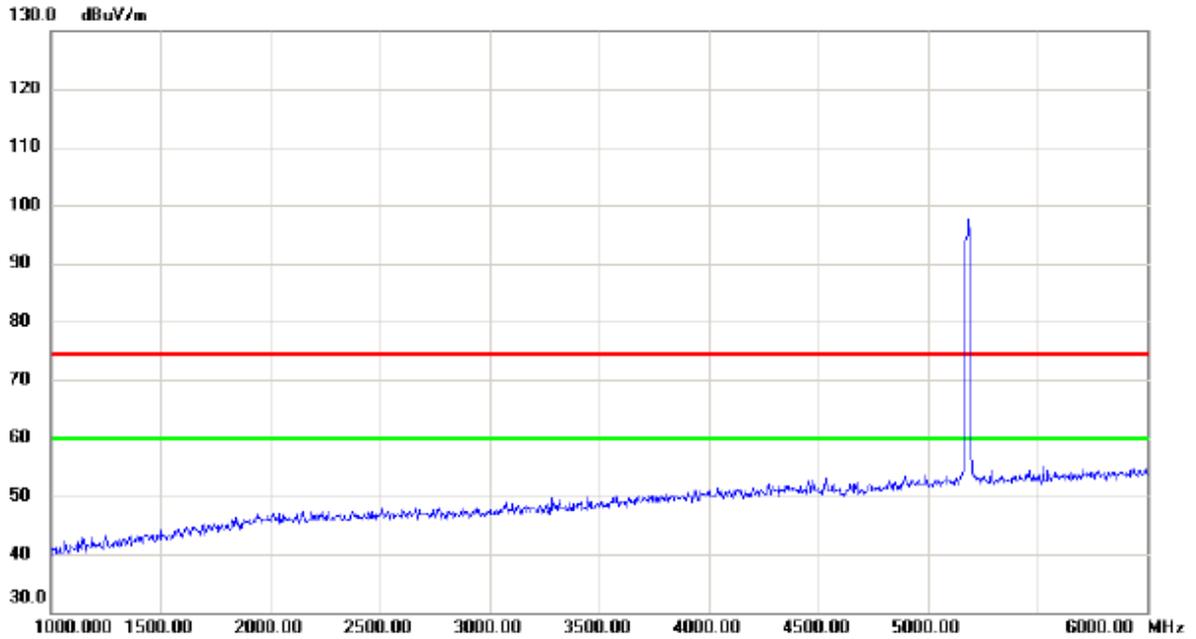


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

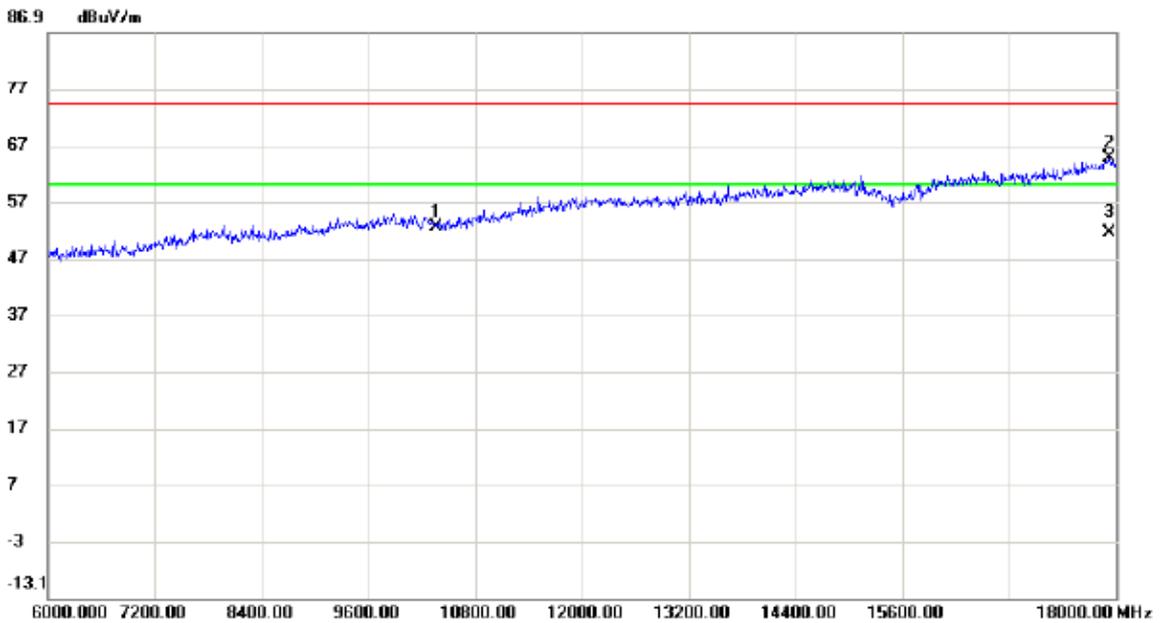


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	38.76	13.85	52.61	74.30	-21.69	peak	
2		17928.00	41.06	23.62	64.68	74.30	-9.62	peak	
3	*	17928.00	27.94	23.62	51.56	60.00	-8.44	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

**Vertical**

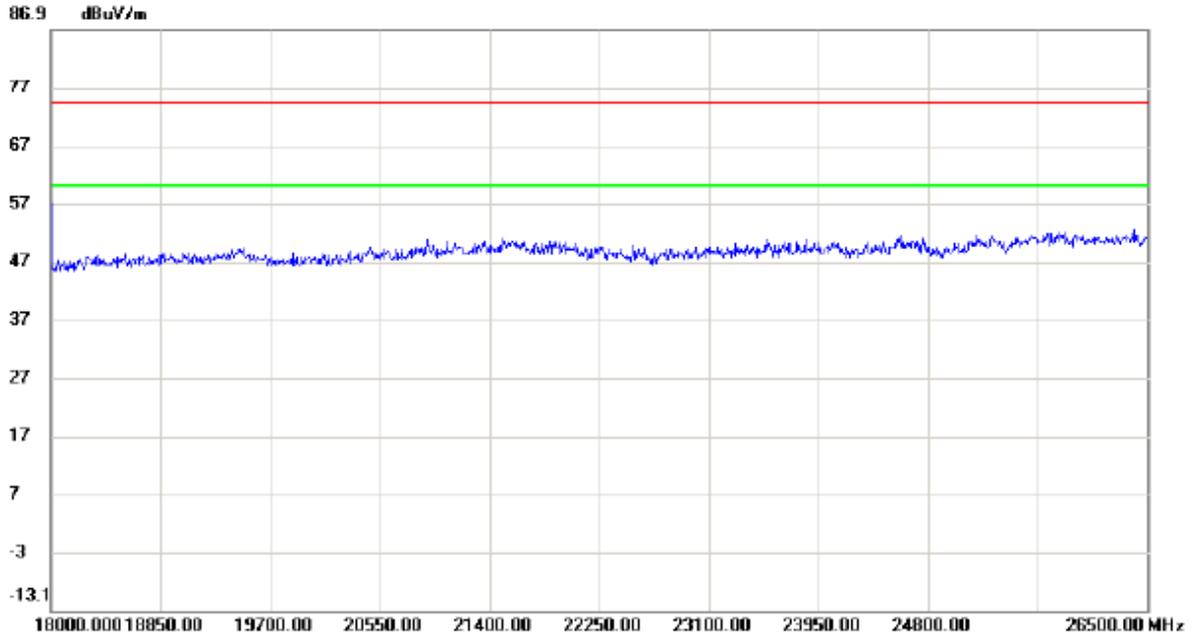


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

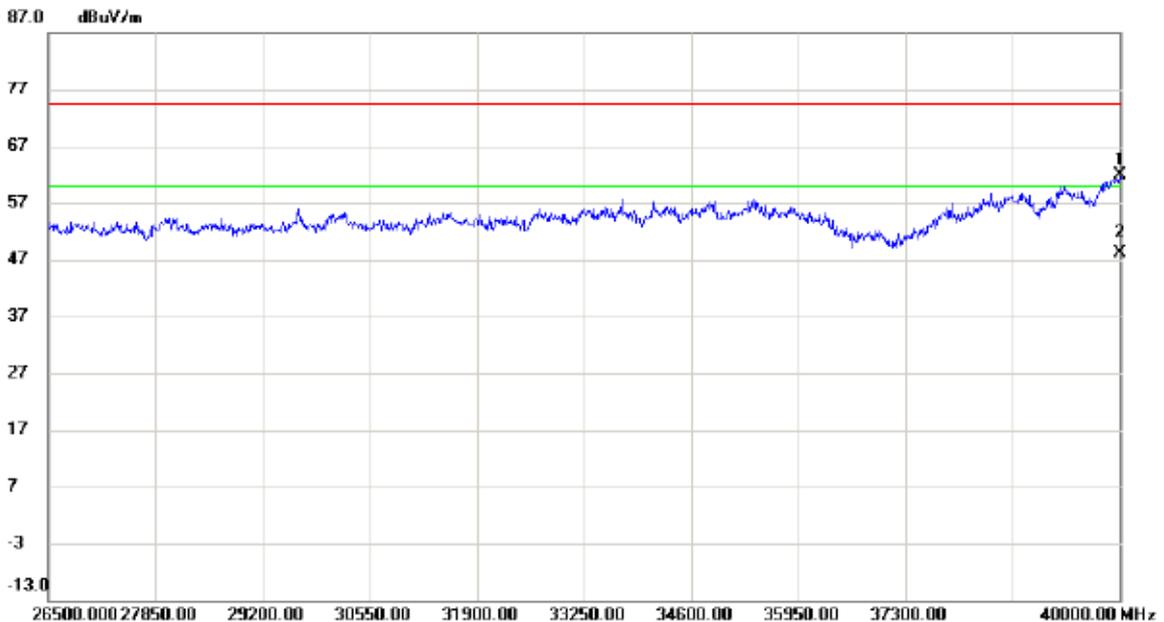

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	40000.00	44.30	17.60	61.90	74.30	-12.40	peak	
2 *	40000.00	30.46	17.60	48.06	60.00	-11.94	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


### Horizontal

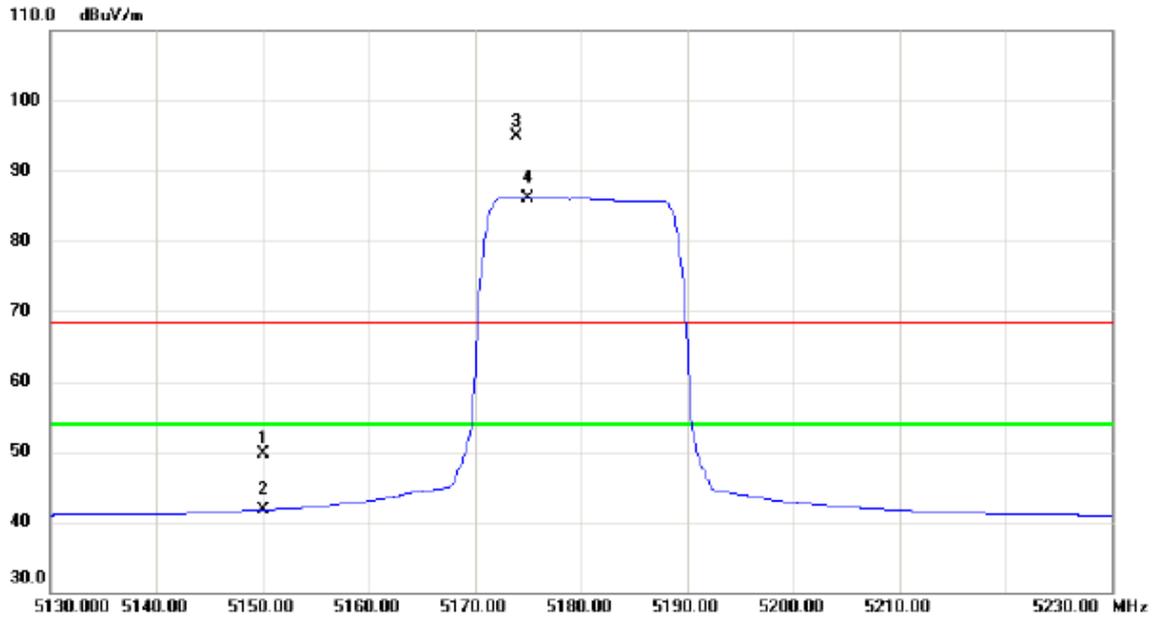


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	8.98	40.63	49.61	68.30	-18.69	peak	
2		5150.000	1.12	40.63	41.75	54.00	-12.25	AVG	
3	X	5173.900	54.11	40.71	94.82	68.30	26.52	peak	No Limit
4	*	5175.000	45.39	40.71	86.10	54.00	32.10	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Horizontal

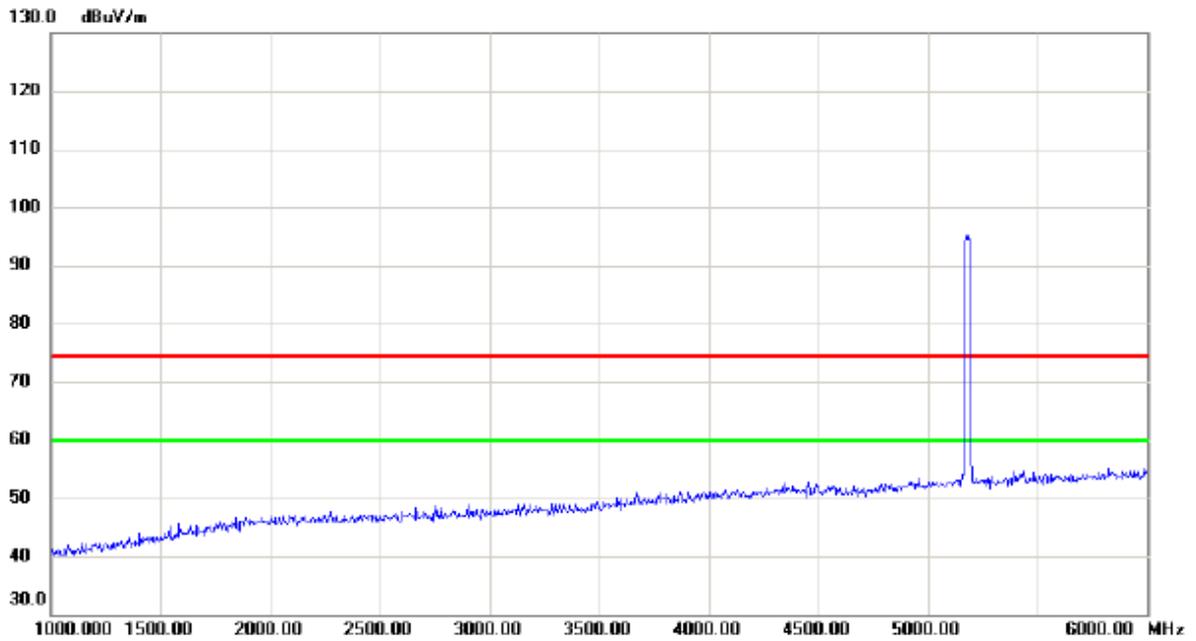


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

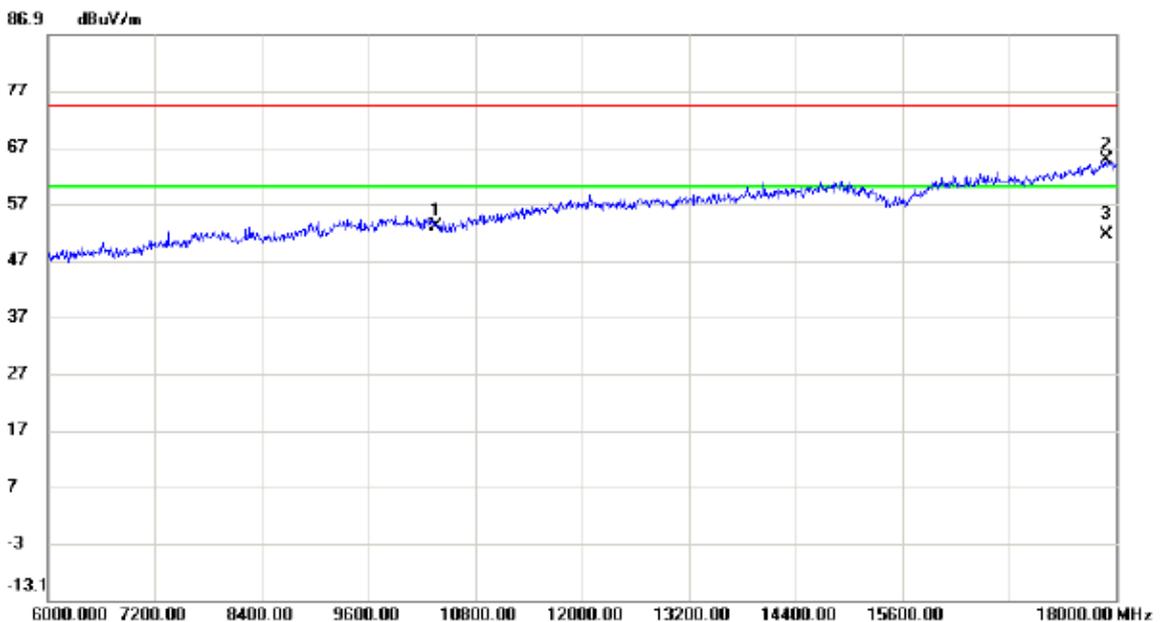


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	39.06	13.85	52.91	74.30	-21.39	peak	
2		17892.00	41.36	23.51	64.87	74.30	-9.43	peak	
3	*	17892.00	28.11	23.51	51.62	60.00	-8.38	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Horizontal

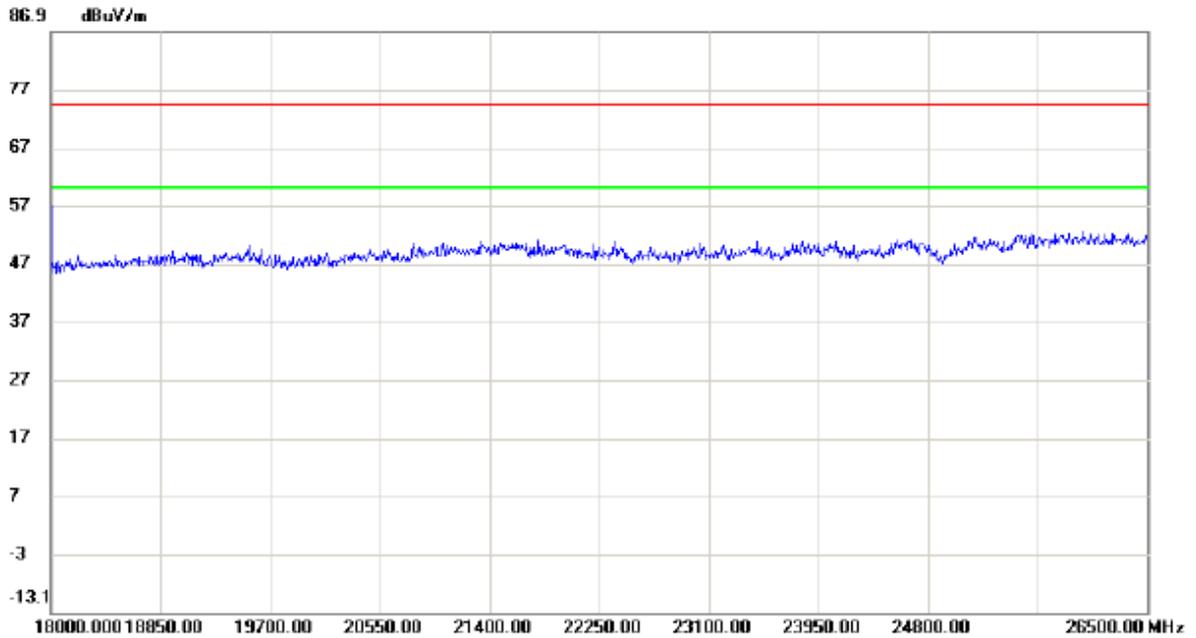


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

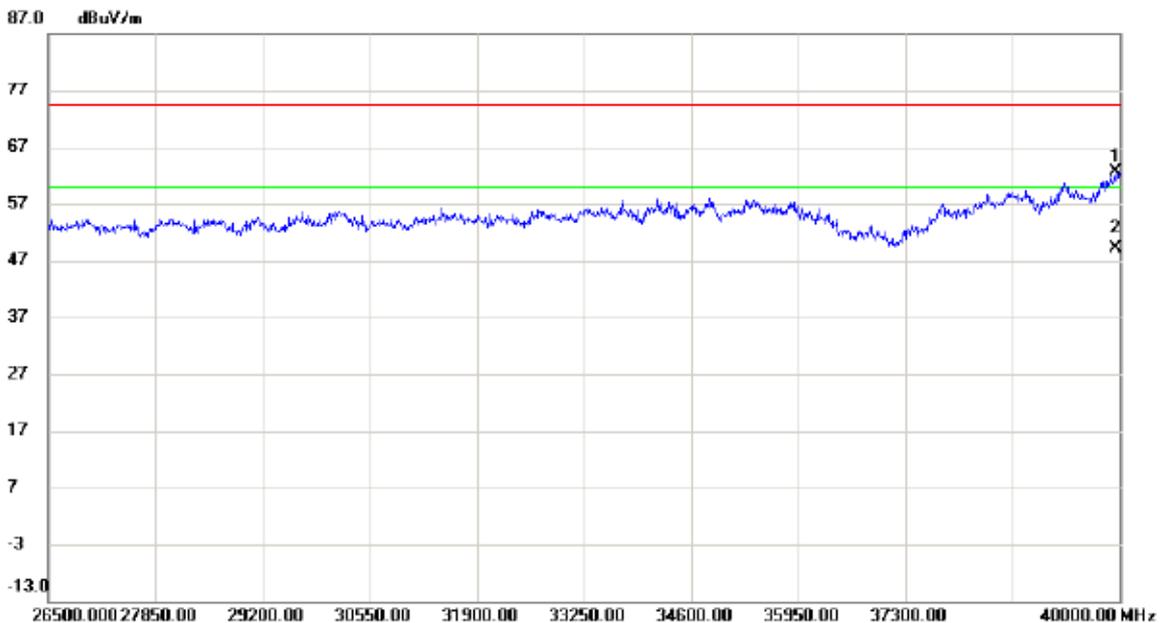

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39959.50	45.14	17.50	62.64	74.30	-11.66	peak	
2	*	39959.50	31.56	17.50	49.06	60.00	-10.94	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


### Vertical

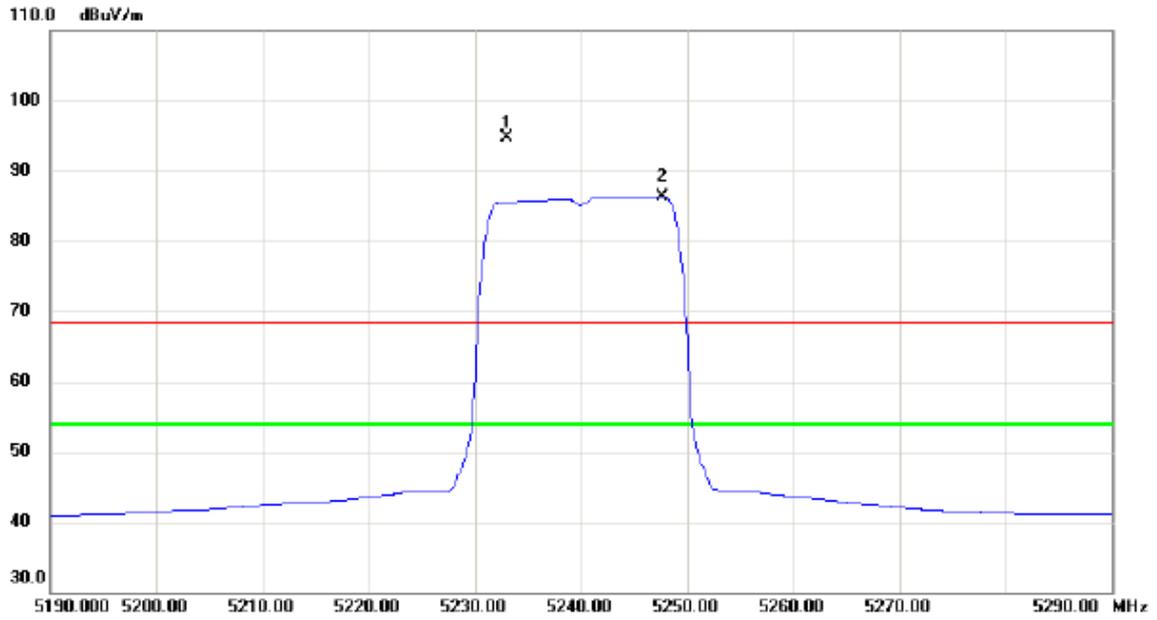


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5233.000	53.81	40.90	94.71	68.30	26.41	peak	No Limit
2	*	5247.700	45.43	40.94	86.37	54.00	32.37	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


### Vertical

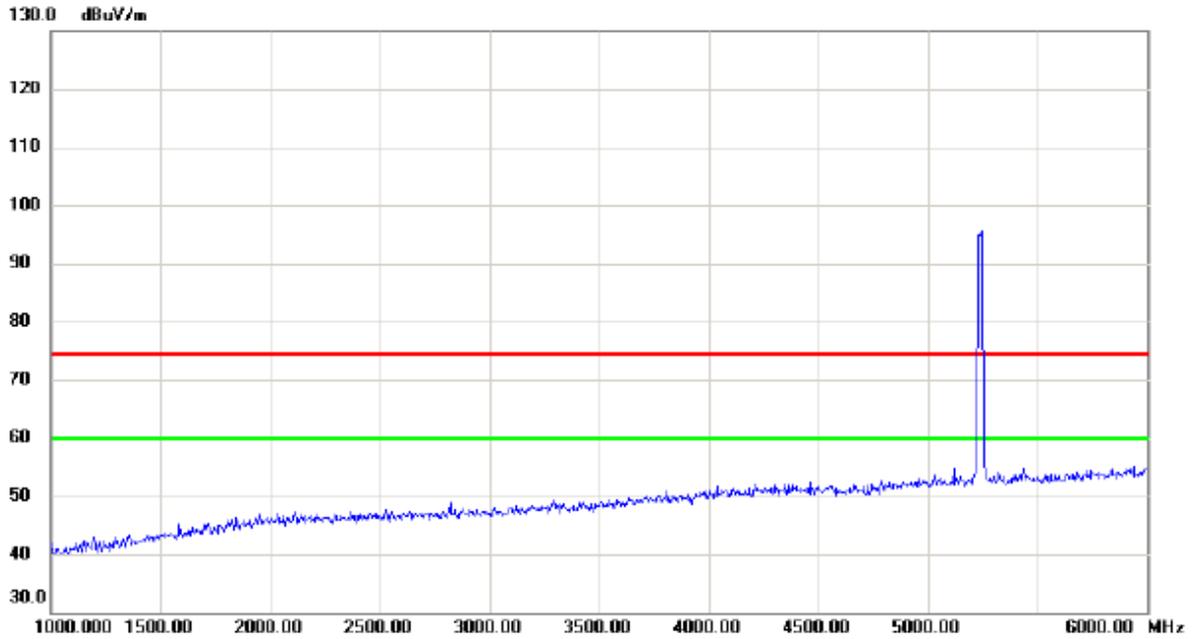

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

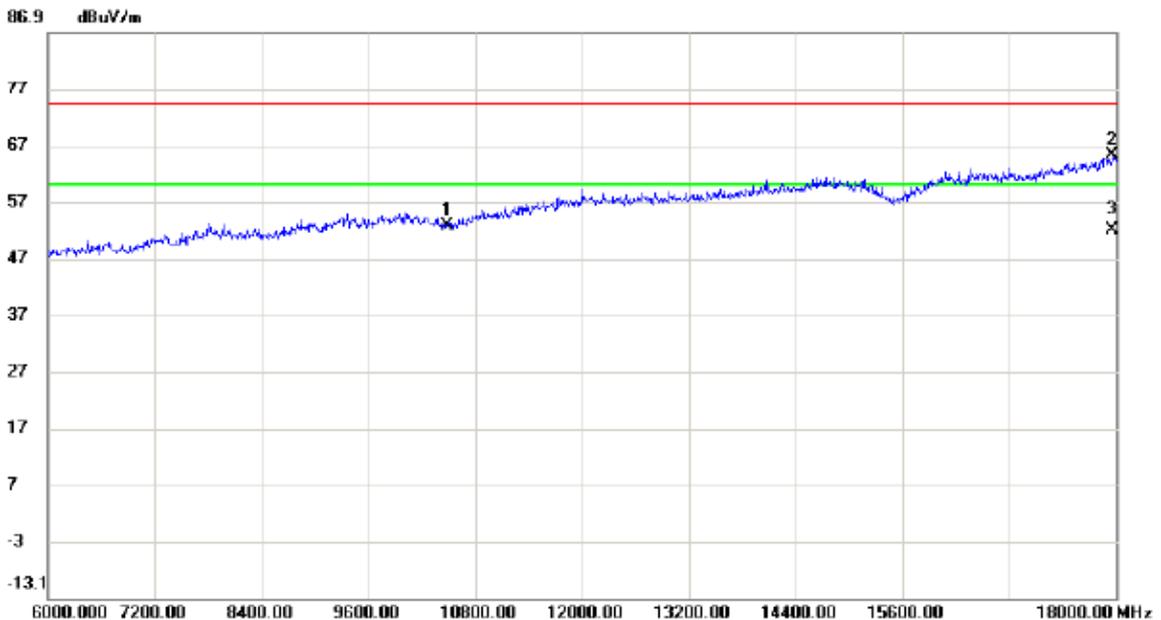


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	39.10	13.69	52.79	74.30	-21.51	peak	
2		17964.00	41.57	23.72	65.29	74.30	-9.01	peak	
3	*	17964.00	28.33	23.72	52.05	60.00	-7.95	AVG	




Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Vertical

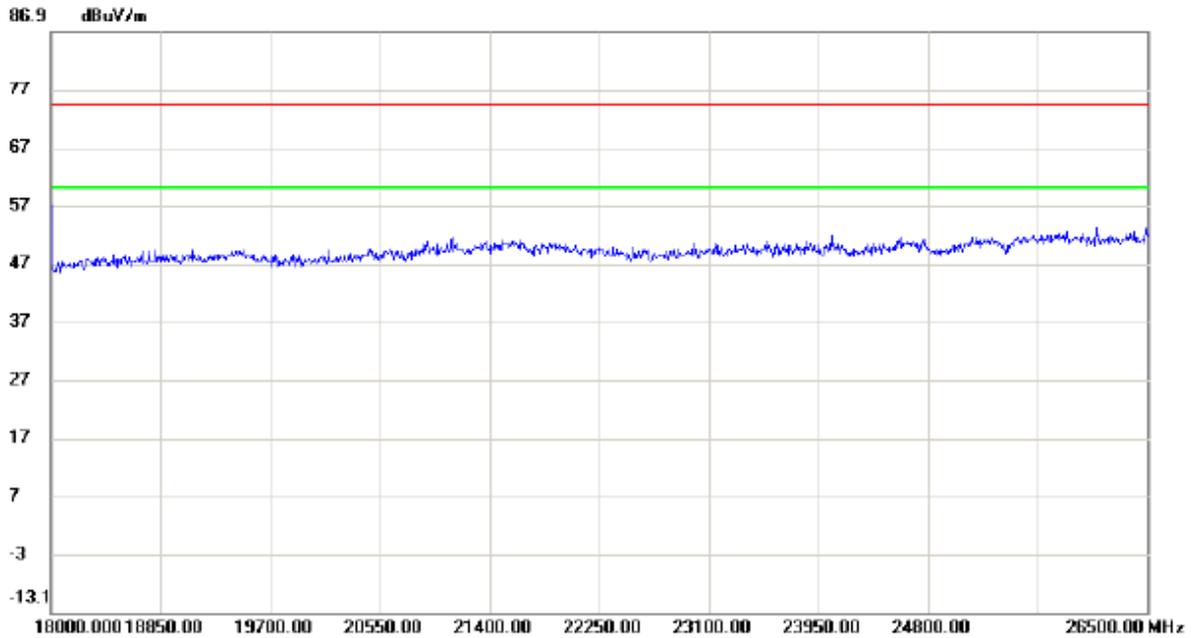


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

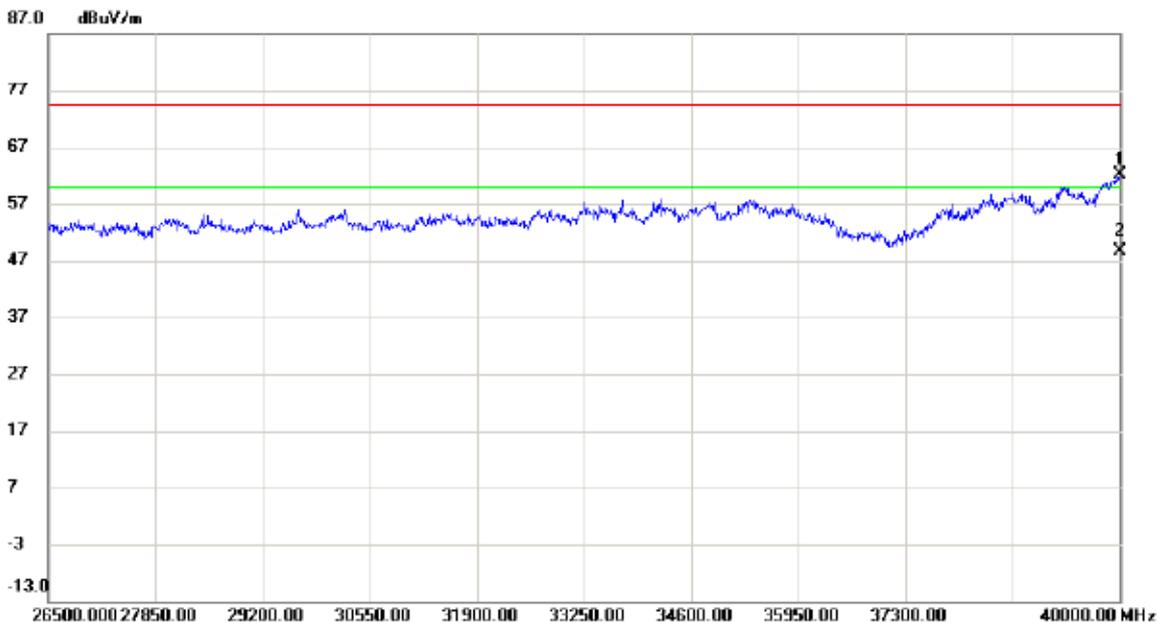

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	44.48	17.60	62.08	74.30	-12.22	peak	
2	*	40000.00	30.95	17.60	48.55	60.00	-11.45	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


### Horizontal

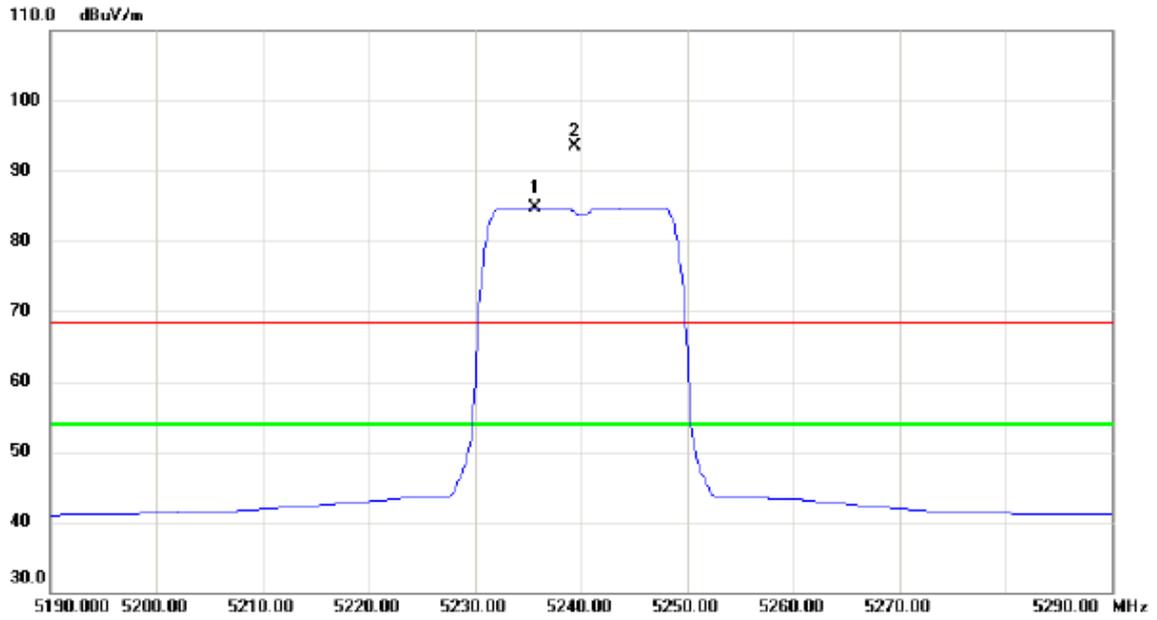


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5235.600	43.84	40.91	84.75	54.00	30.75	AVG	No Limit
2	X	5239.400	52.60	40.92	93.52	68.30	25.22	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Horizontal

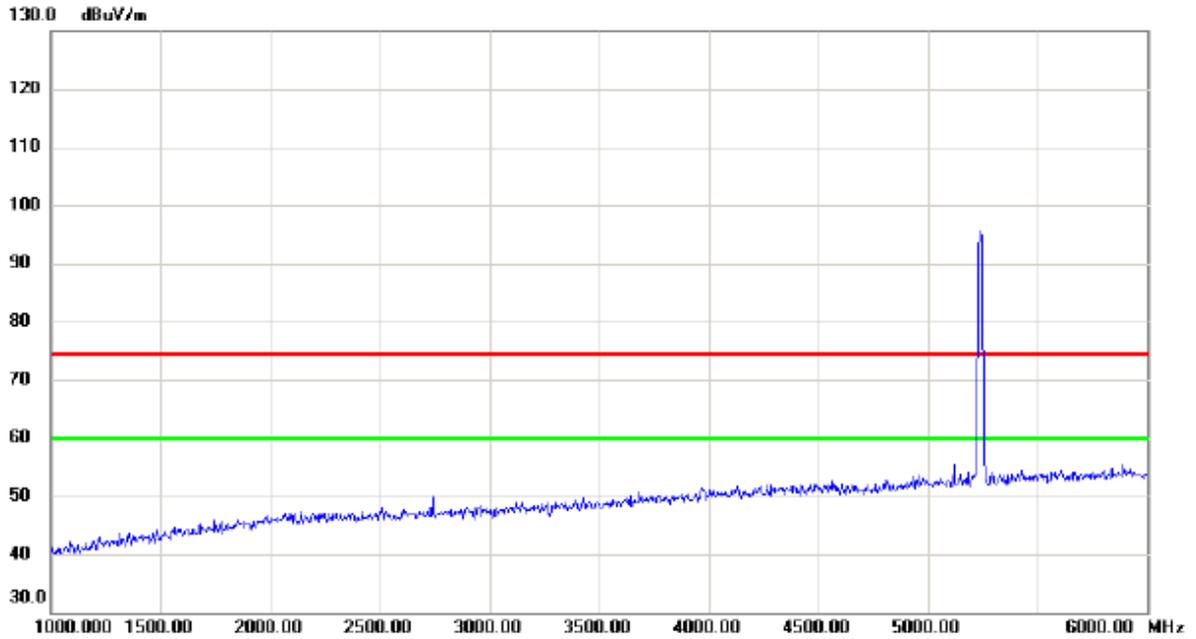


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

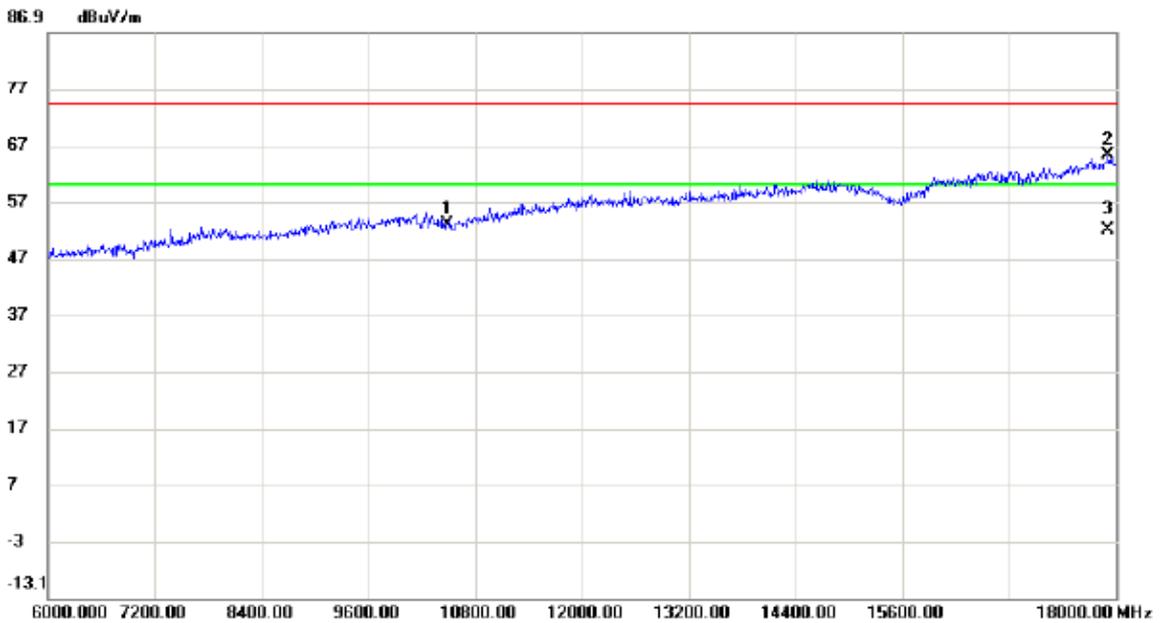


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	39.26	13.69	52.95	74.30	-21.35	peak	
2		17916.00	41.69	23.58	65.27	74.30	-9.03	peak	
3	*	17916.00	28.36	23.58	51.94	60.00	-8.06	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Horizontal

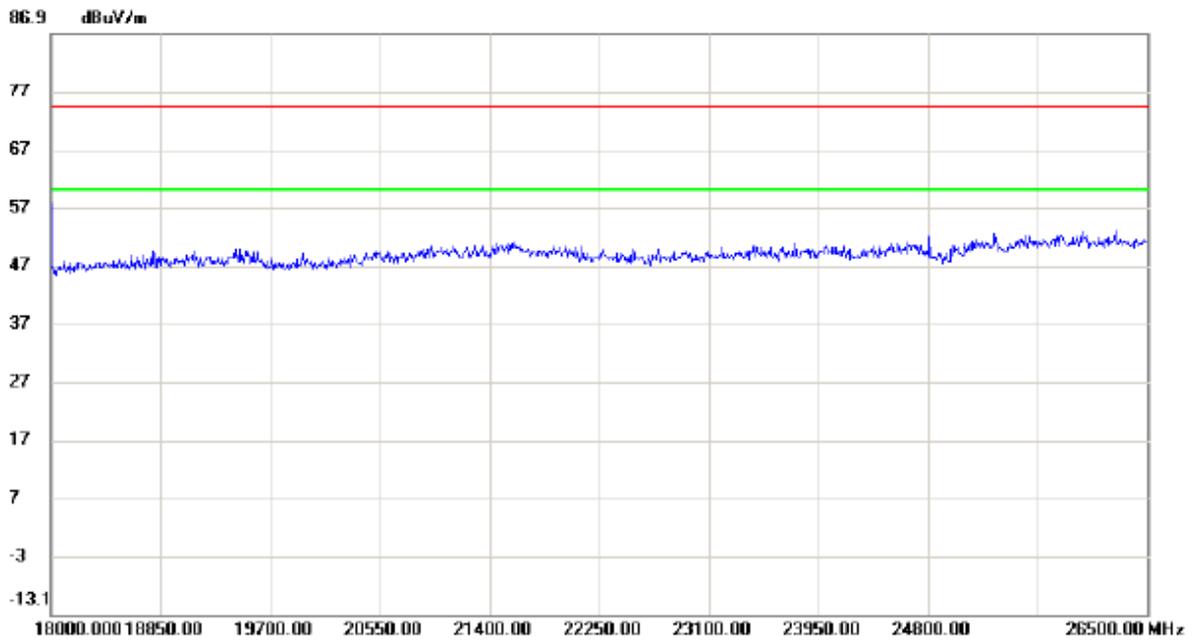


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

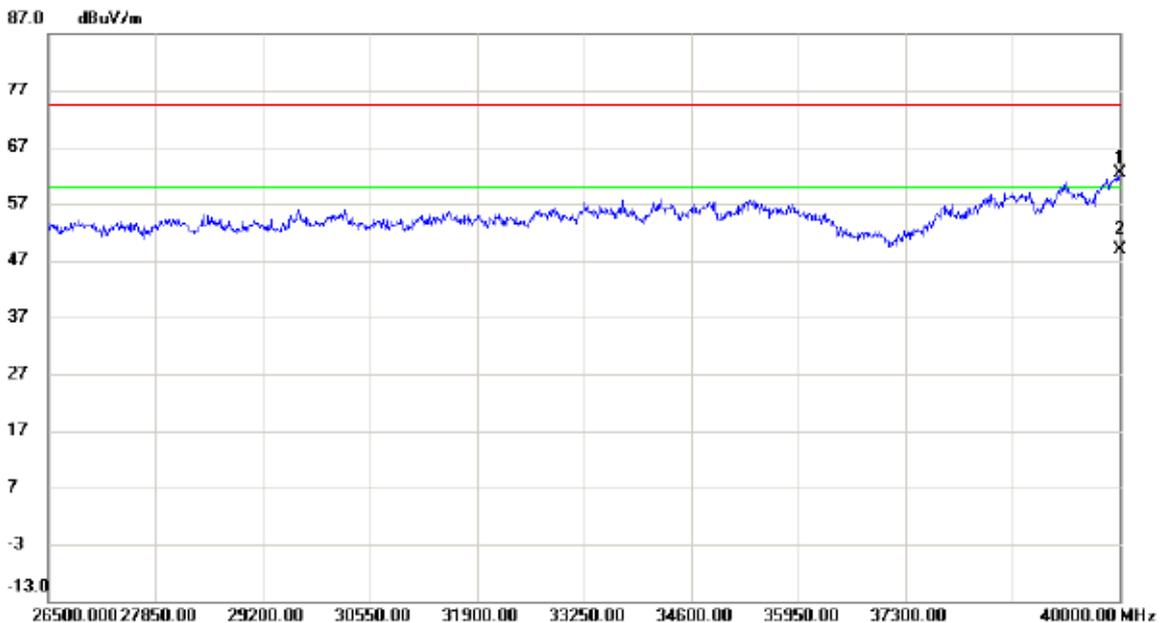

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	44.78	17.60	62.38	74.30	-11.92	peak	
2	*	40000.00	31.16	17.60	48.76	60.00	-11.24	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


### Vertical

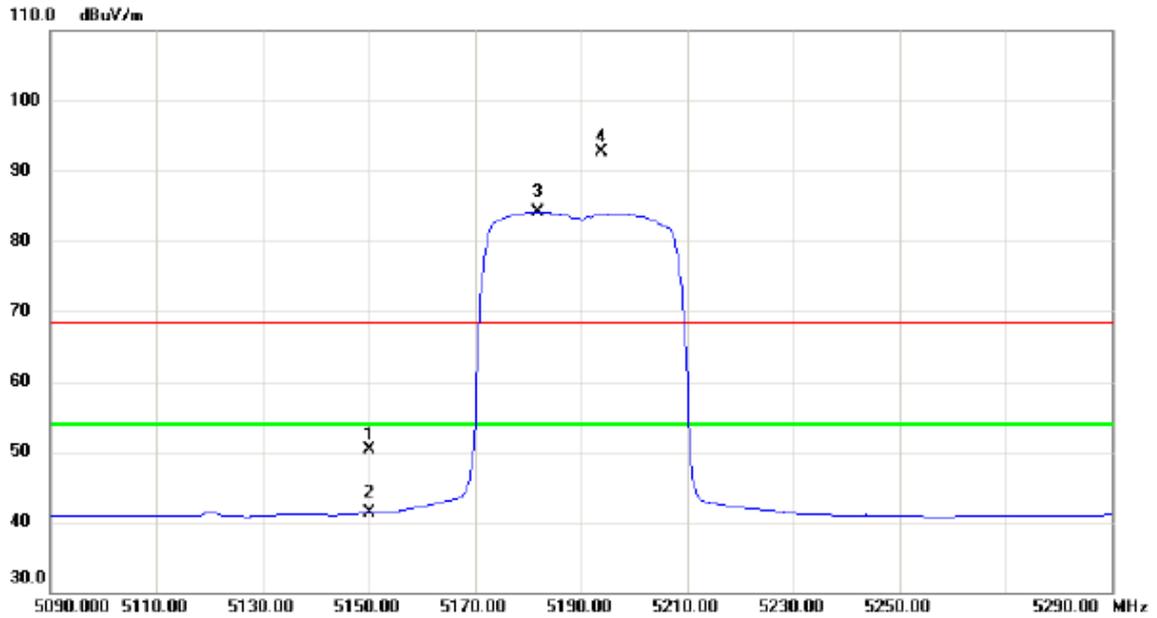


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.61	40.63	50.24	68.30	-18.06	peak	
2		5150.000	0.66	40.63	41.29	54.00	-12.71	AVG	
3	*	5181.800	43.41	40.73	84.14	54.00	30.14	AVG	No Limit
4	X	5193.800	51.90	40.77	92.67	68.30	24.37	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Vertical

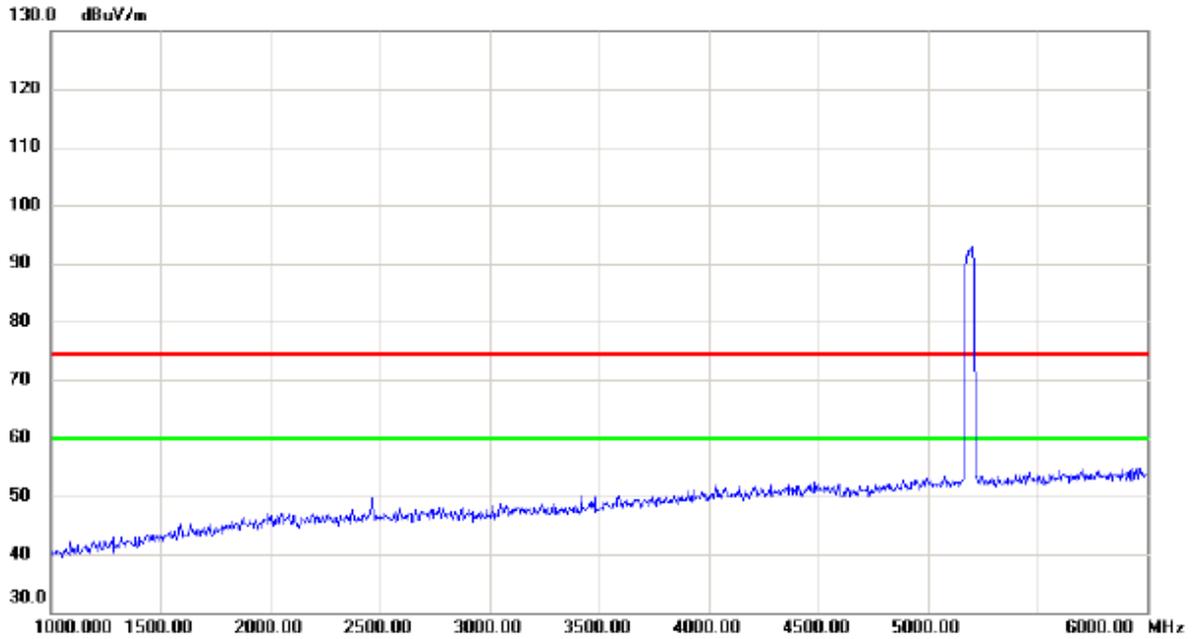


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

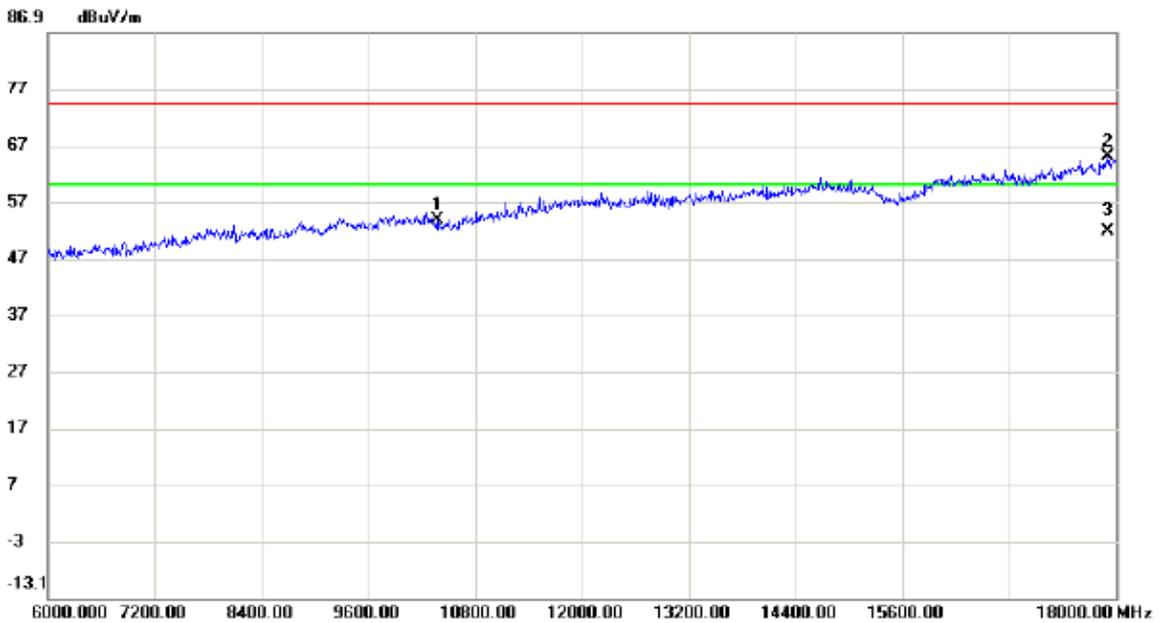


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10380.00	39.87	13.83	53.70	74.30	-20.60	peak	
2		17916.00	41.37	23.58	64.95	74.30	-9.35	peak	
3	*	17916.00	28.14	23.58	51.72	60.00	-8.28	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Vertical

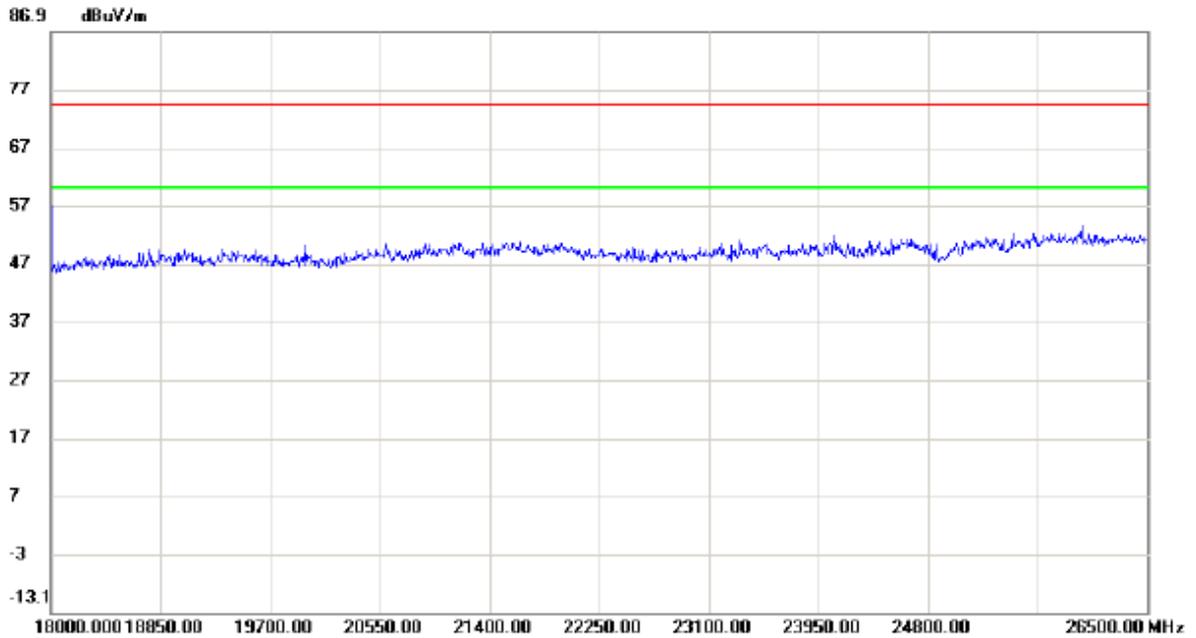


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

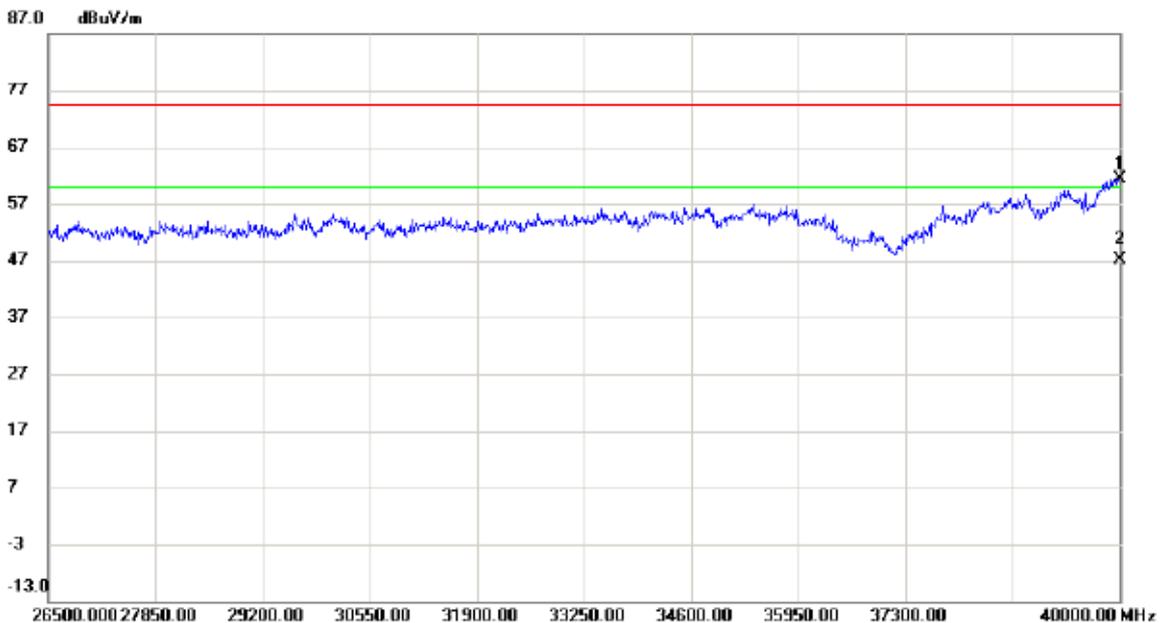

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	43.85	17.60	61.45	74.30	-12.85	peak	
2	*	40000.00	29.56	17.60	47.16	60.00	-12.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


### Horizontal

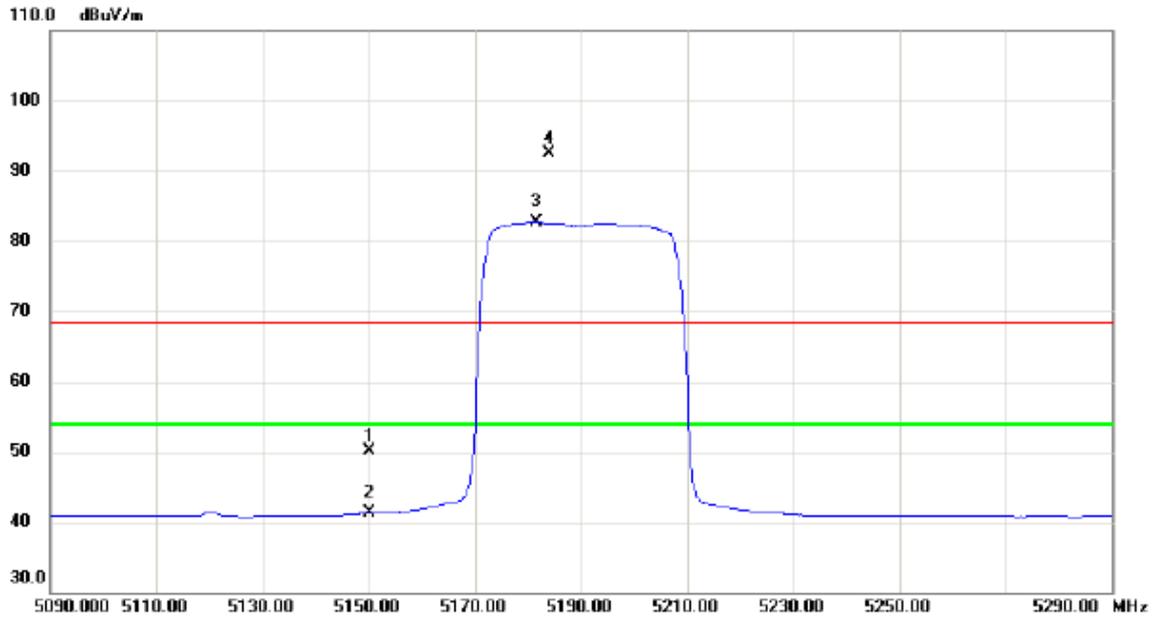


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.41	40.63	50.04	68.30	-18.26	peak	
2		5150.000	0.64	40.63	41.27	54.00	-12.73	AVG	
3	*	5181.600	41.90	40.73	82.63	54.00	28.63	AVG	No Limit
4	X	5184.000	51.70	40.74	92.44	68.30	24.14	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Horizontal

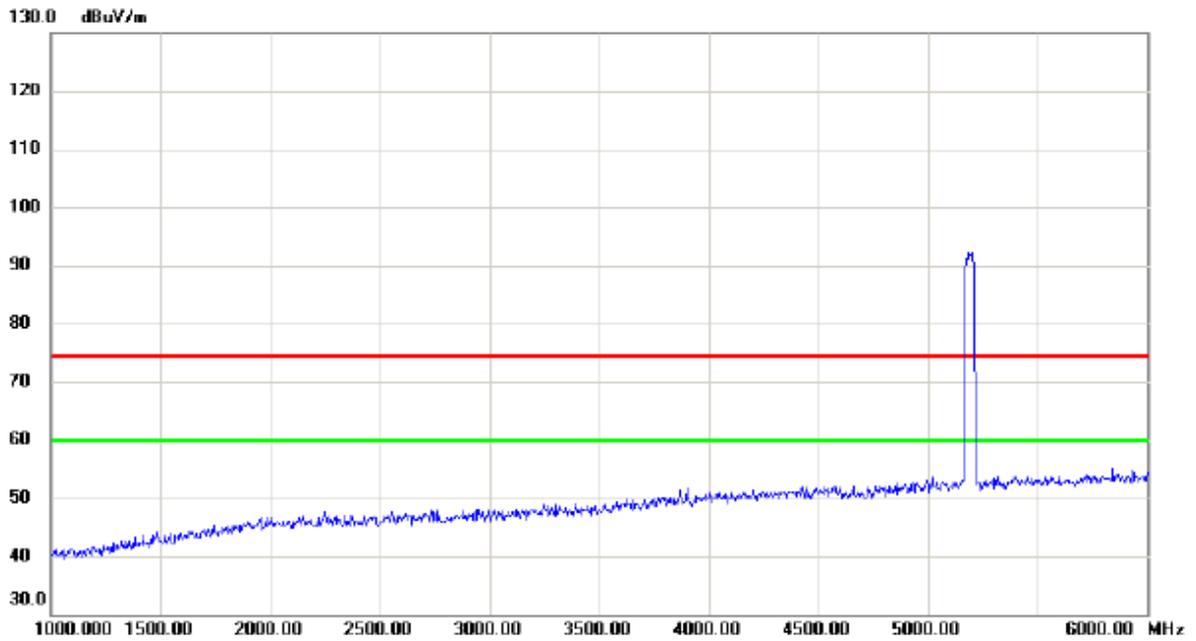


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

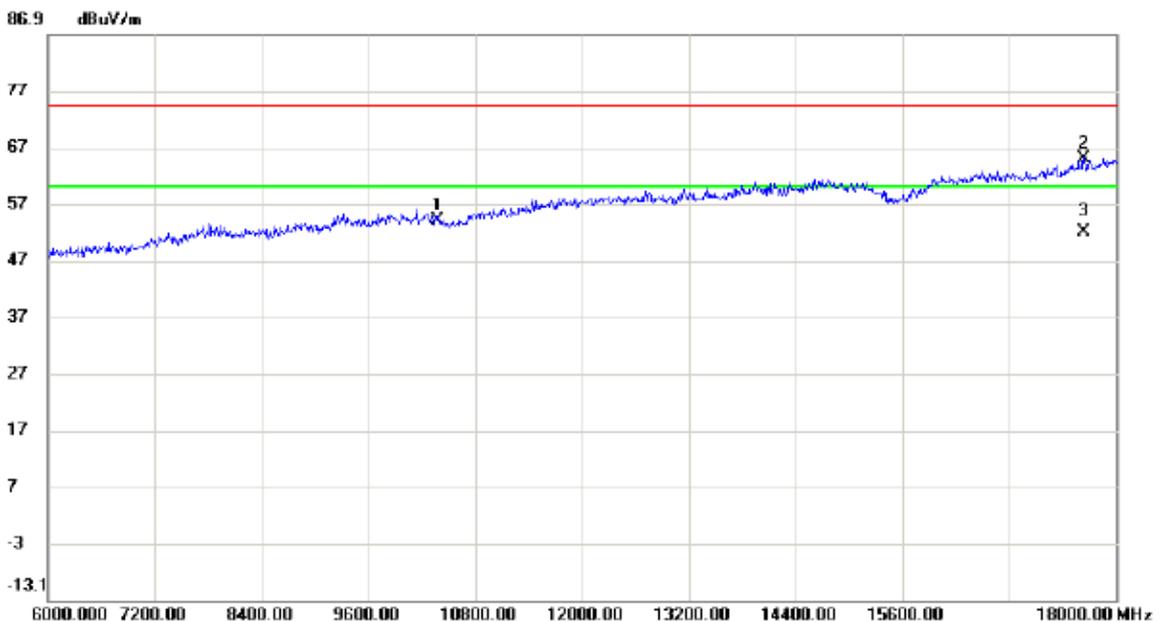


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10380.00	40.32	13.83	54.15	74.30	-20.15	peak	
2		17640.00	42.37	22.78	65.15	74.30	-9.15	peak	
3	*	17640.00	29.19	22.78	51.97	60.00	-8.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Horizontal

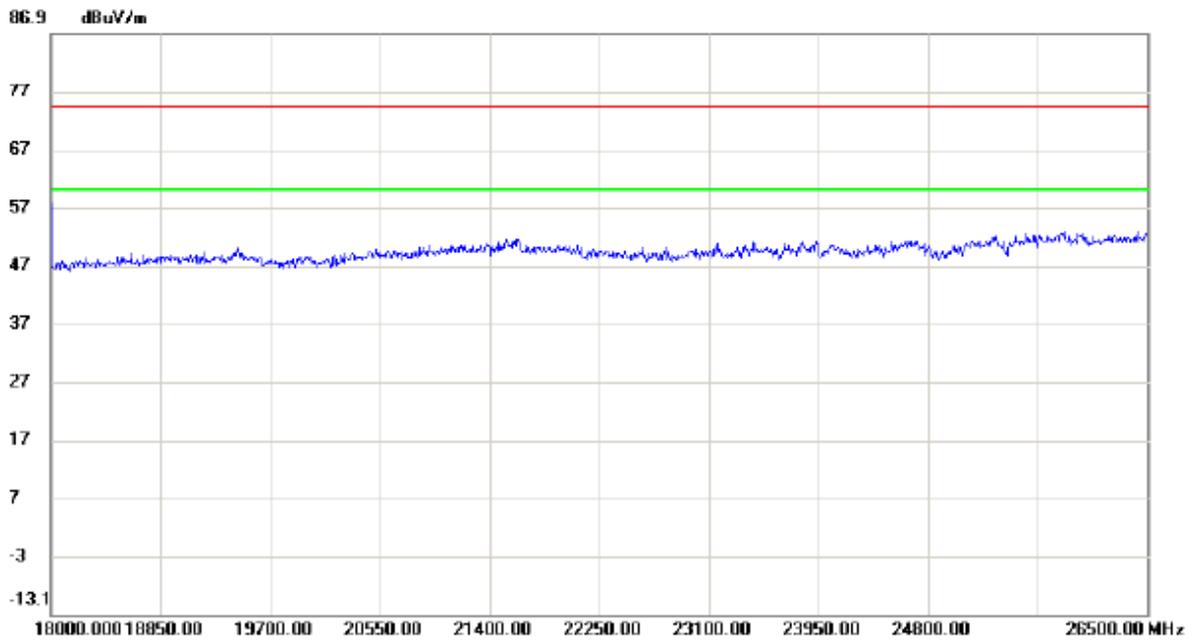


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

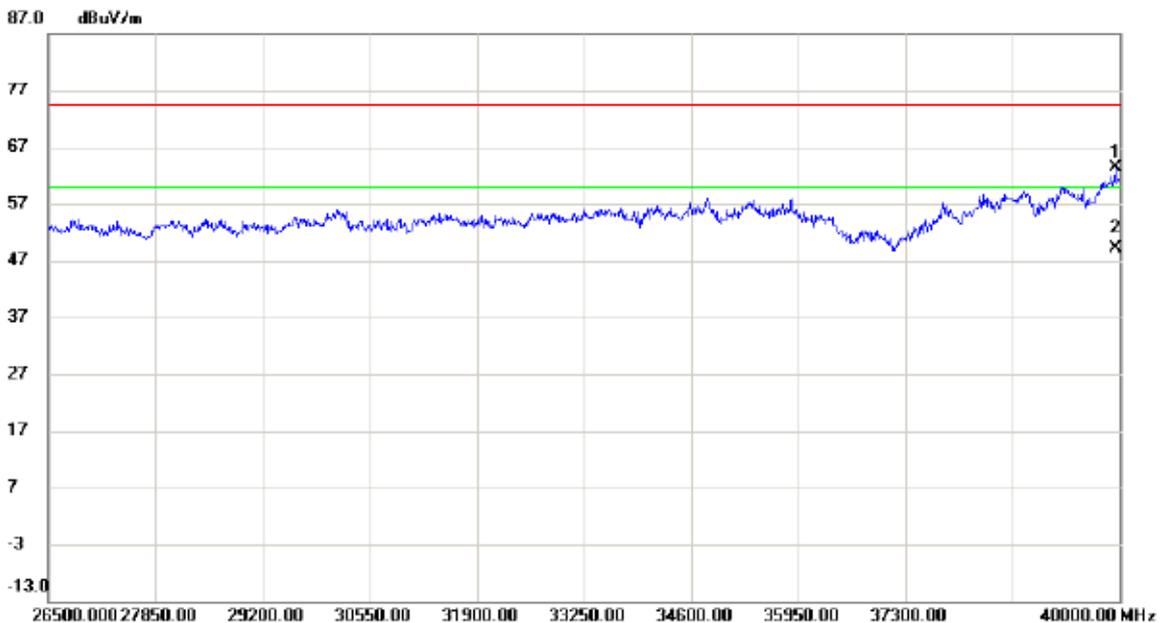

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39946.00	45.90	17.47	63.37	74.30	-10.93	peak	
2	*	39946.00	31.65	17.47	49.12	60.00	-10.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


### Vertical

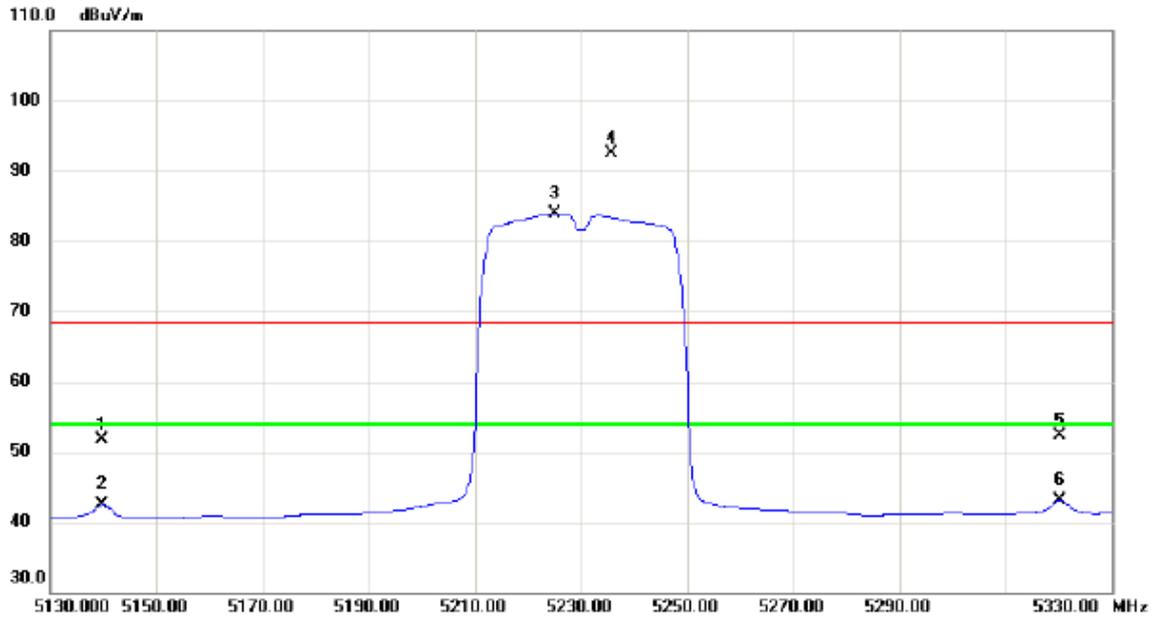


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5139.800	11.04	40.60	51.64	68.30	-16.66	peak	
2		5139.800	1.84	40.60	42.44	54.00	-11.56	AVG	
3	*	5225.000	43.02	40.87	83.89	54.00	29.89	AVG	No Limit
4	X	5235.600	51.65	40.91	92.56	68.30	24.26	peak	No Limit
5		5320.200	11.09	41.19	52.28	68.30	-16.02	peak	
6		5320.200	1.95	41.19	43.14	54.00	-10.86	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Vertical

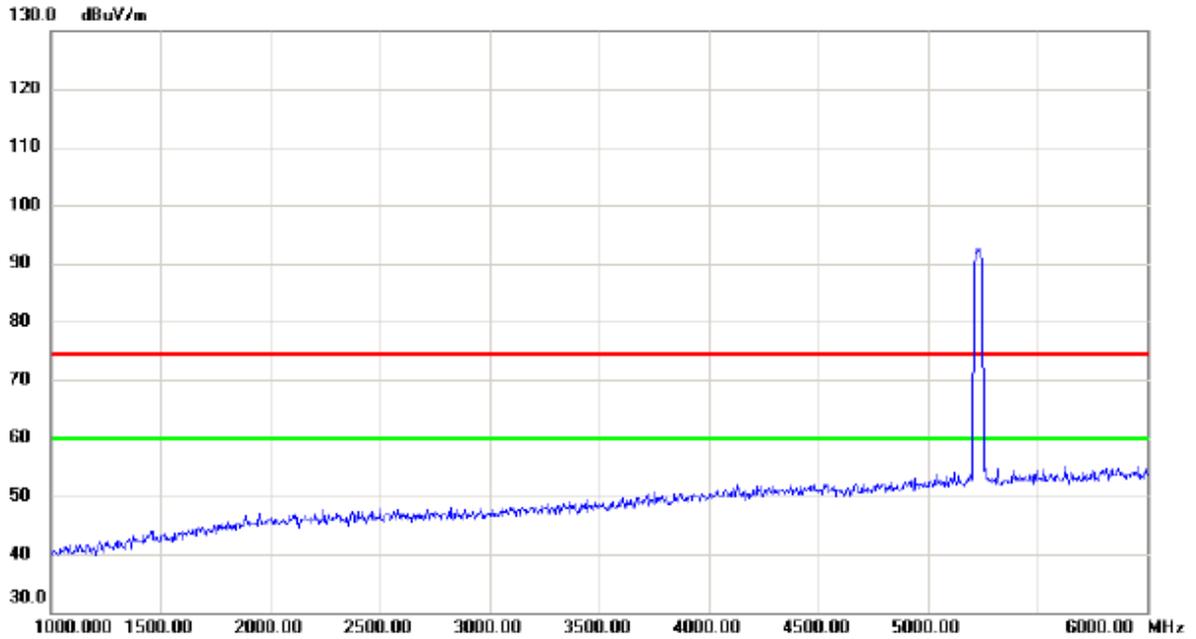


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

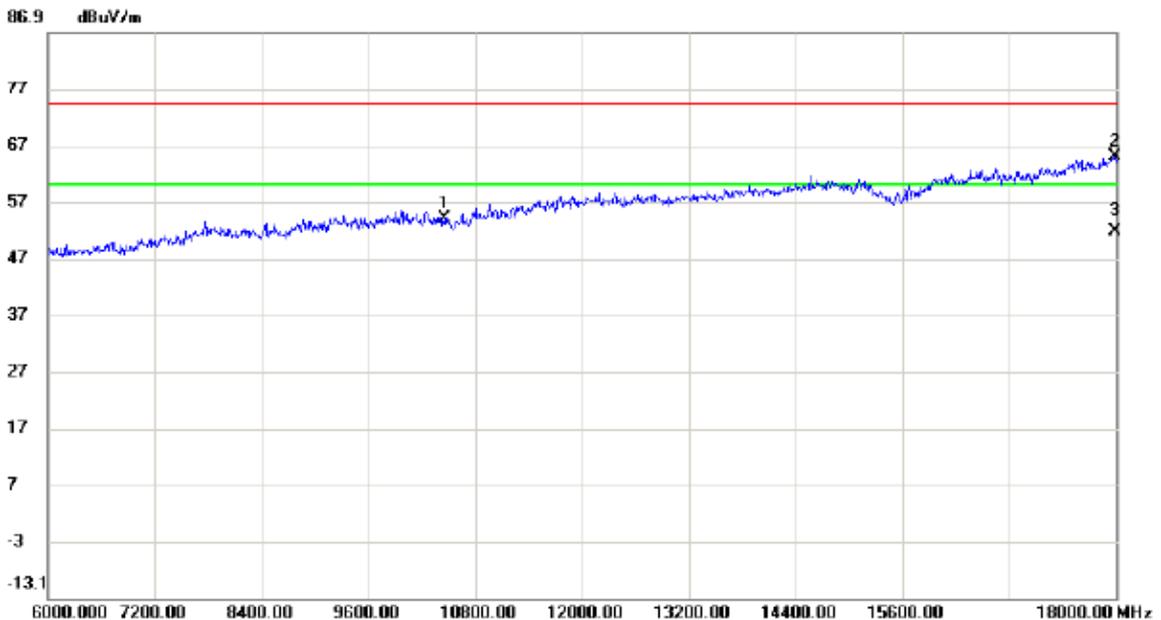


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10460.00	40.43	13.71	54.14	74.30	-20.16	peak	
2		17988.00	41.29	23.80	65.09	74.30	-9.21	peak	
3	*	17988.00	28.04	23.80	51.84	60.00	-8.16	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Vertical

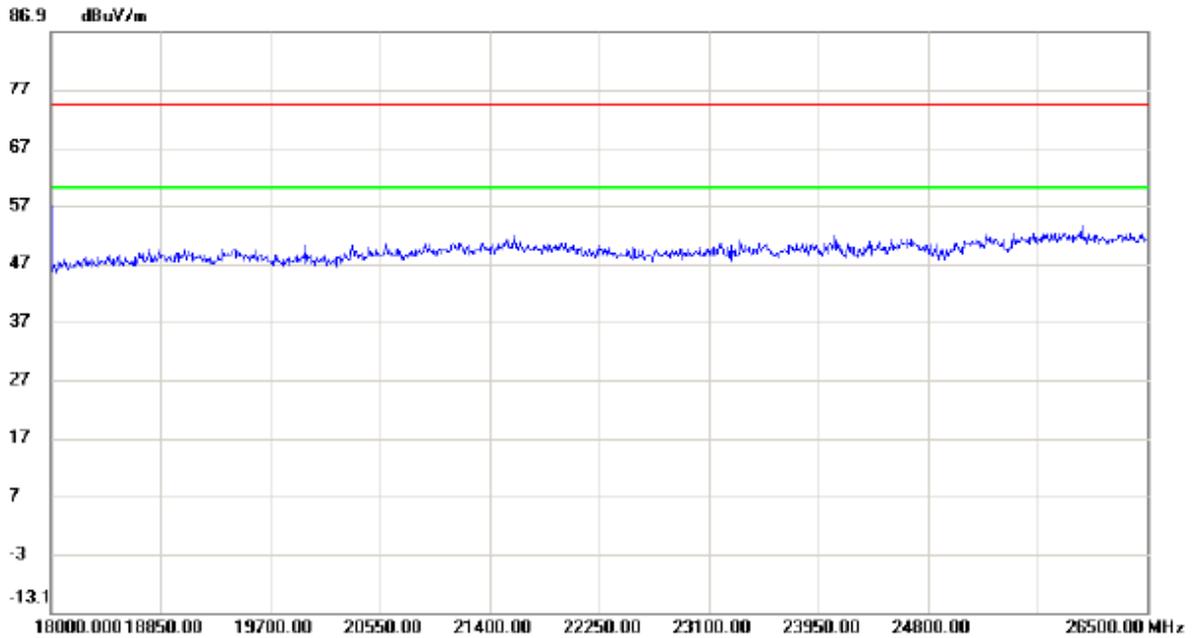


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

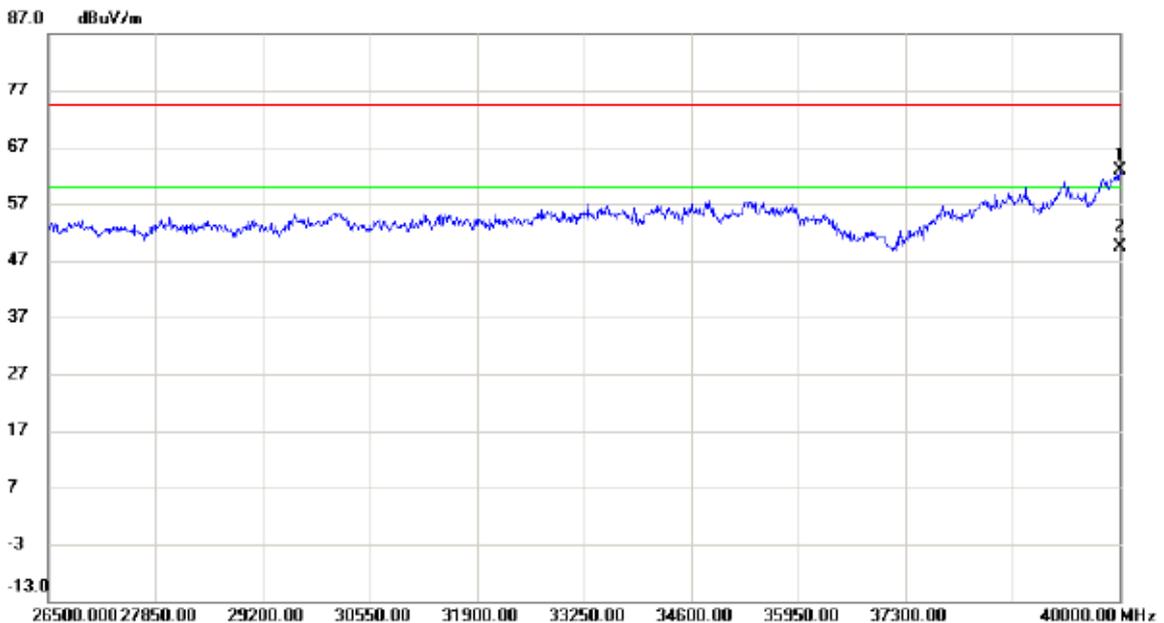

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	45.20	17.60	62.80	74.30	-11.50	peak	
2	*	40000.00	31.87	17.60	49.47	60.00	-10.53	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


### Horizontal

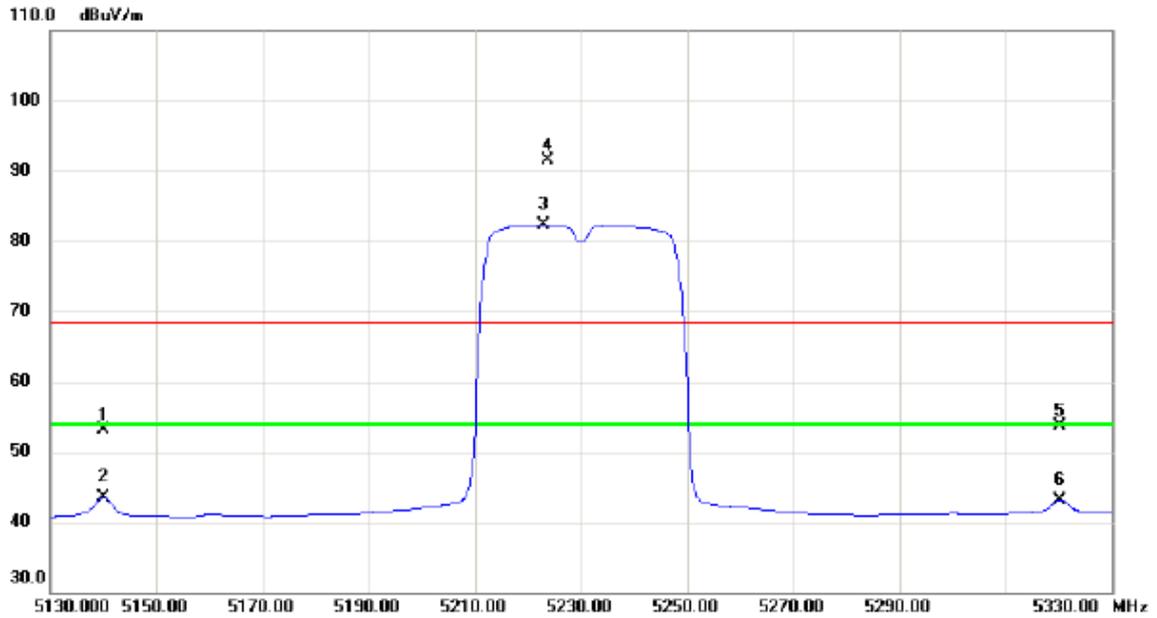

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5140.000	12.55	40.60	53.15	68.30	-15.15	peak	
2		5140.000	2.91	40.60	43.51	54.00	-10.49	AVG	
3	*	5223.000	41.49	40.87	82.36	54.00	28.36	AVG	No Limit
4	X	5223.800	50.60	40.87	91.47	68.30	23.17	peak	No Limit
5		5320.200	12.54	41.19	53.73	68.30	-14.57	peak	
6		5320.200	1.96	41.19	43.15	54.00	-10.85	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Horizontal

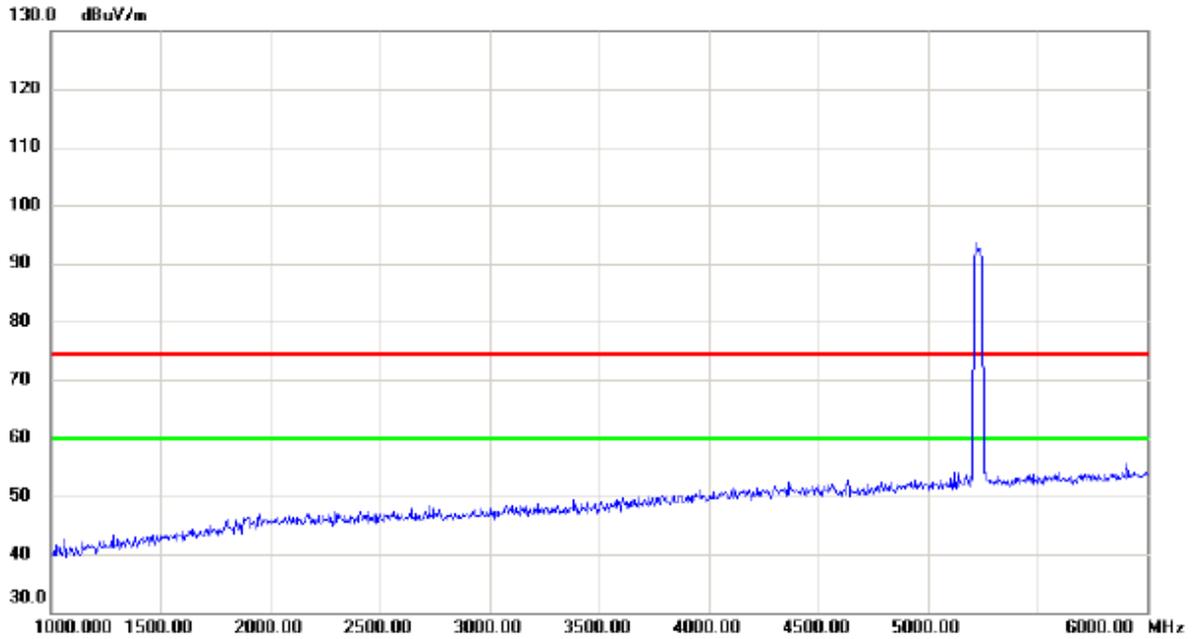


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10460.00	40.84	13.71	54.55	74.30	-19.75	peak	
2		17952.00	41.15	23.69	64.84	74.30	-9.46	peak	
3	*	17952.00	28.00	23.69	51.69	60.00	-8.31	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Horizontal

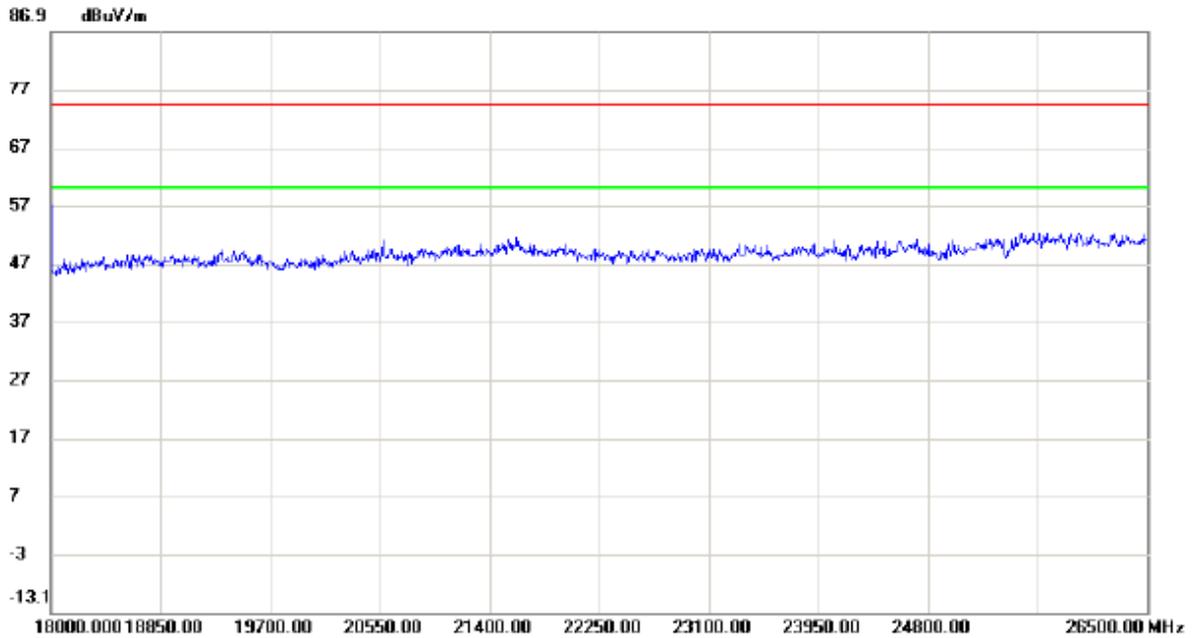


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

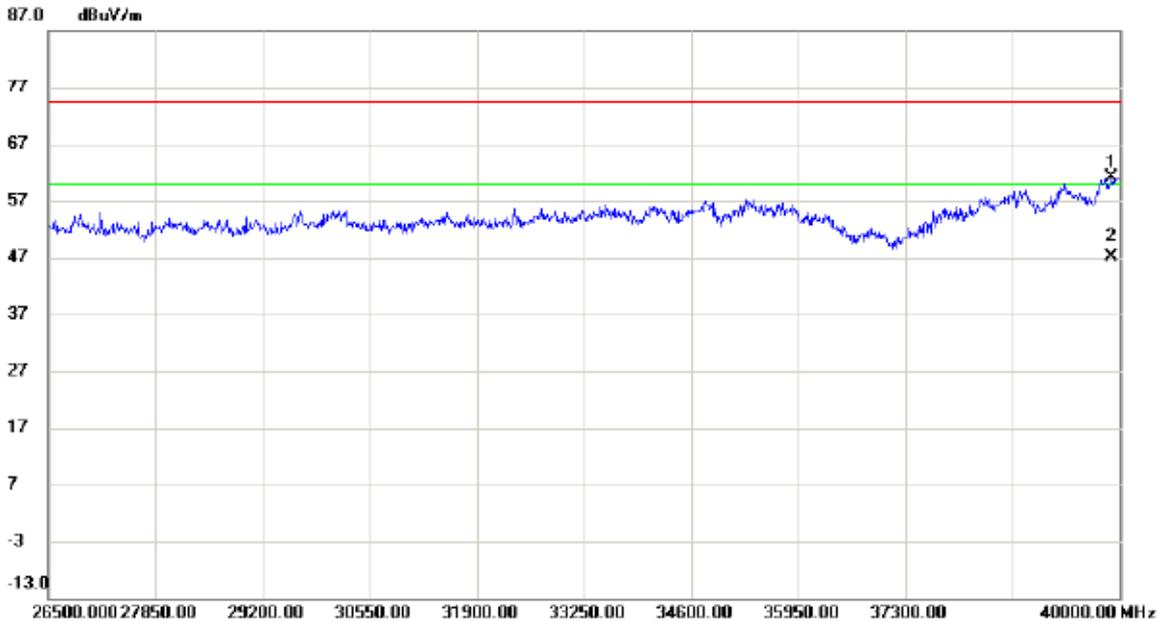

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39905.50	43.74	17.37	61.11	74.30	-13.19	peak	
2	*	39905.50	29.75	17.37	47.12	60.00	-12.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


### Vertical

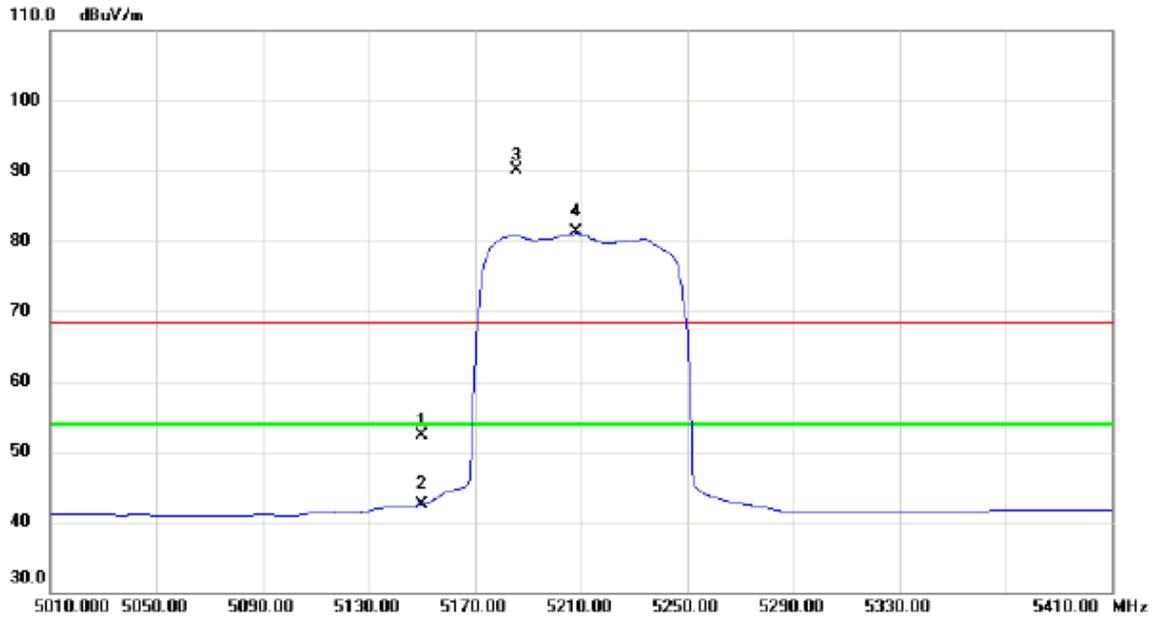


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	11.68	40.63	52.31	68.30	-15.99	peak	
2		5150.000	1.94	40.63	42.57	54.00	-11.43	AVG	
3	X	5185.600	49.34	40.75	90.09	68.30	21.79	peak	No Limit
4	*	5208.000	40.40	40.82	81.22	54.00	27.22	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Vertical

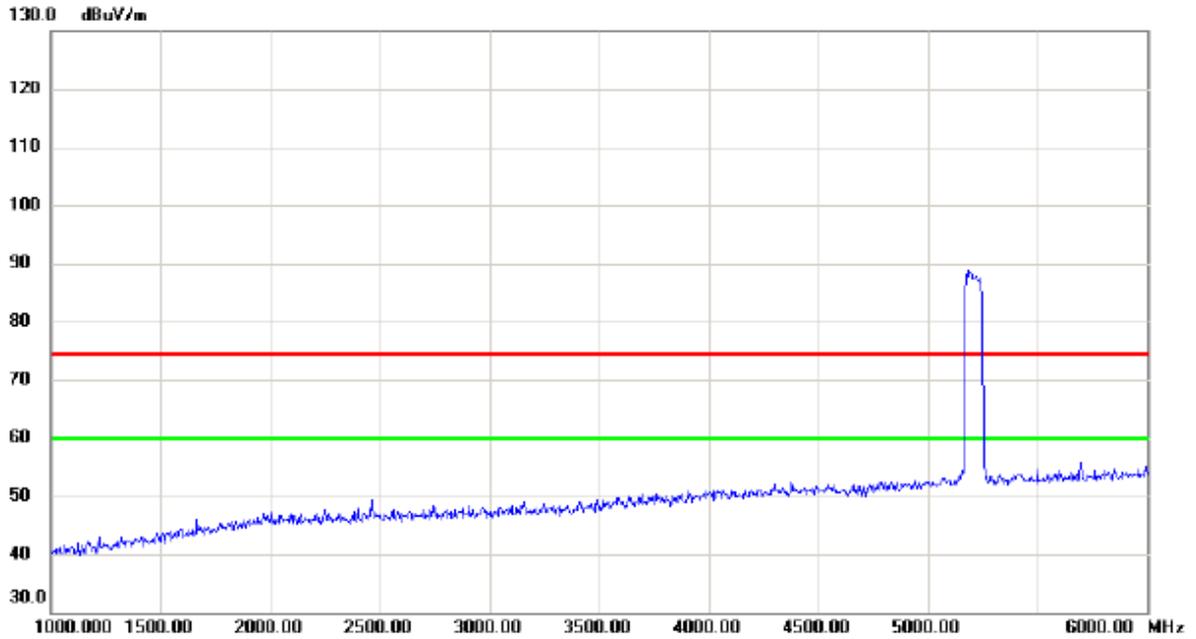


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

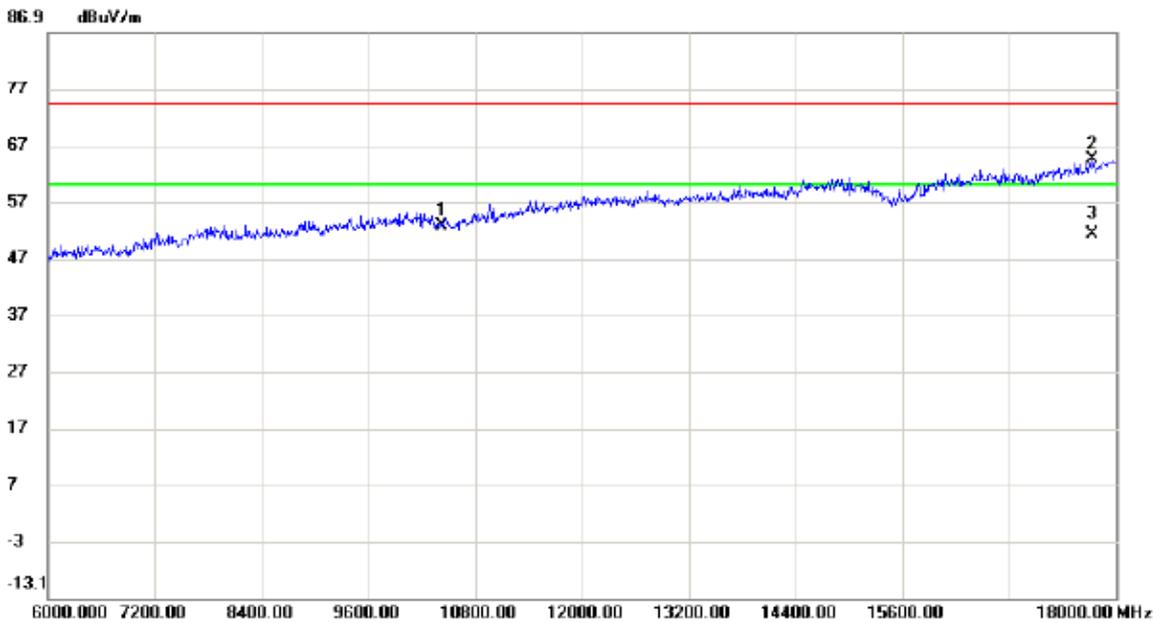


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10420.00	39.09	13.77	52.86	74.30	-21.44	peak	
2		17736.00	41.37	23.06	64.43	74.30	-9.87	peak	
3	*	17736.00	28.12	23.06	51.18	60.00	-8.82	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Vertical

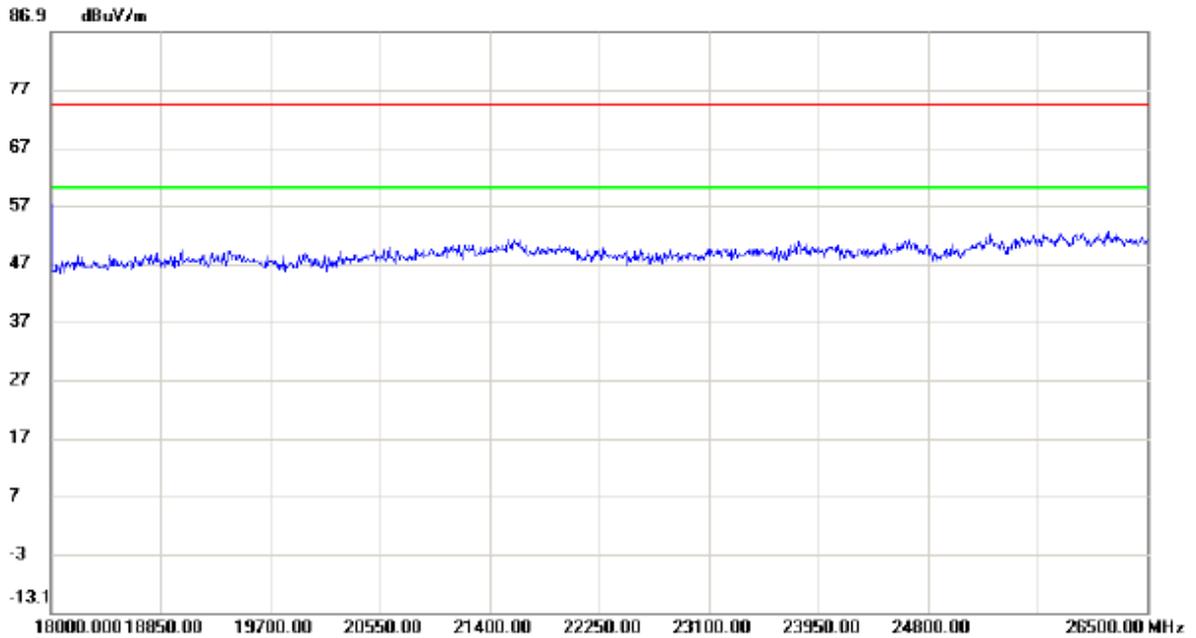


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

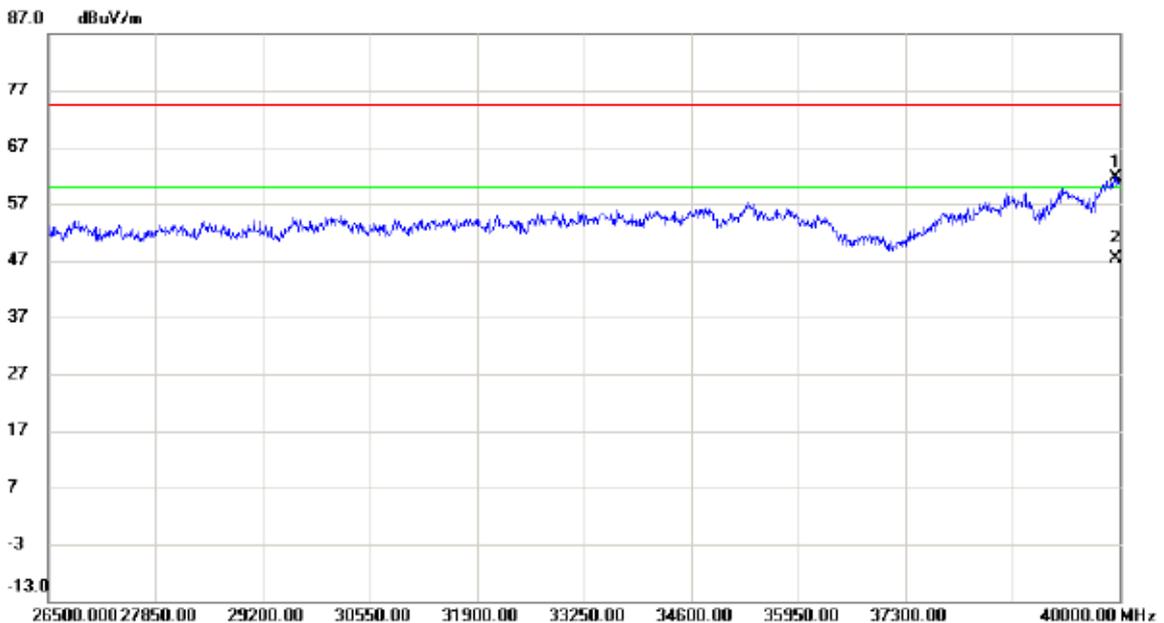

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39946.00	44.14	17.47	61.61	74.30	-12.69	peak	
2		39946.00	29.81	17.47	47.28	60.00	-12.72	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


### Horizontal

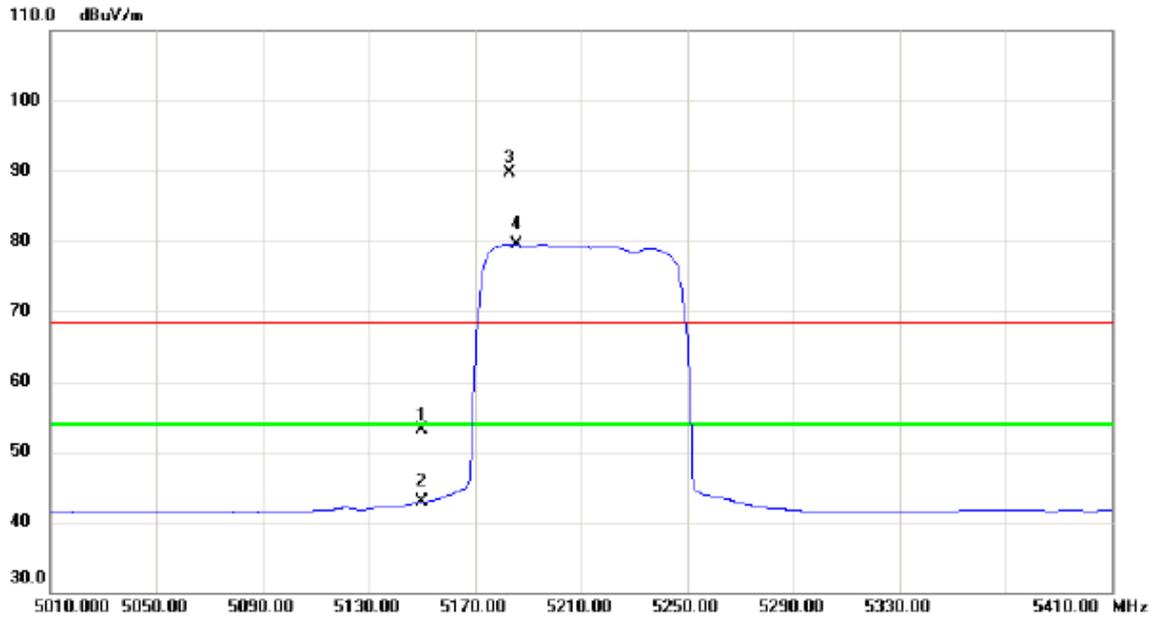


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	12.39	40.63	53.02	68.30	-15.28	peak	
2		5150.000	2.26	40.63	42.89	54.00	-11.11	AVG	
3	X	5183.200	48.96	40.73	89.69	68.30	21.39	peak	No Limit
4	*	5185.600	38.75	40.75	79.50	54.00	25.50	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Horizontal

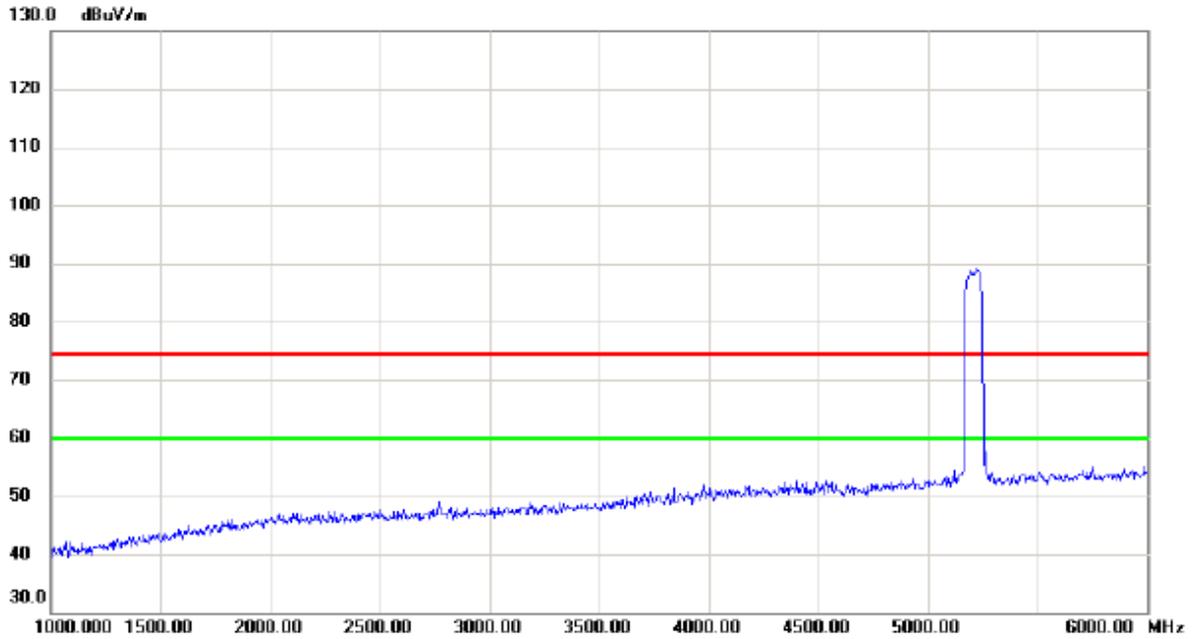


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

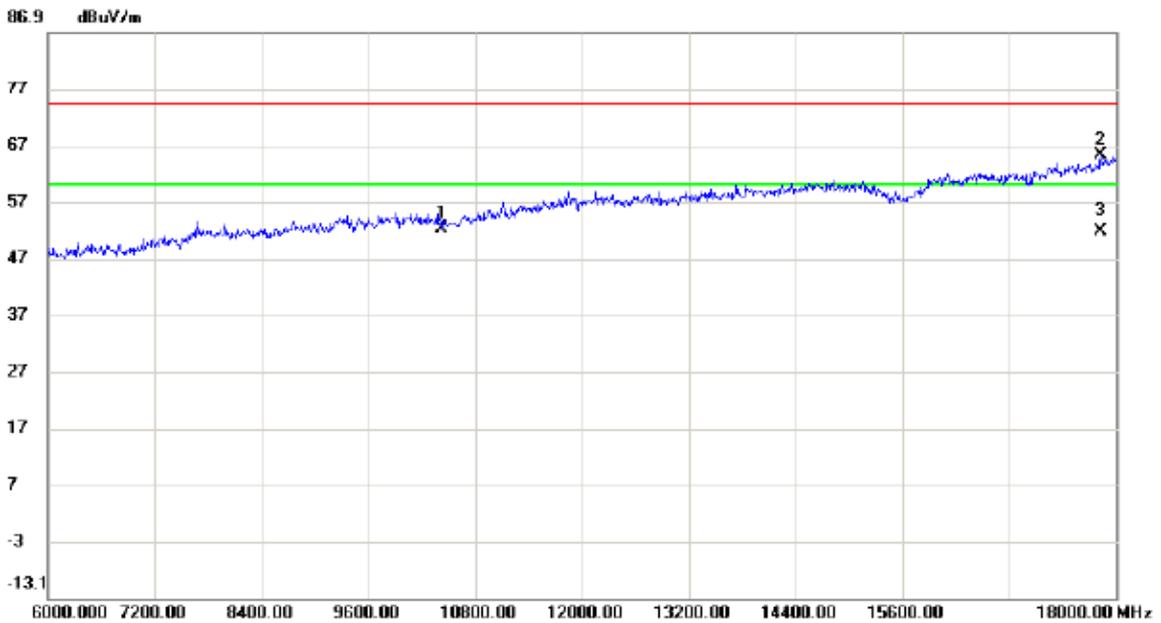


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10420.00	38.53	13.77	52.30	74.30	-22.00	peak	
2		17832.00	41.88	23.34	65.22	74.30	-9.08	peak	
3	*	17832.00	28.53	23.34	51.87	60.00	-8.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Horizontal

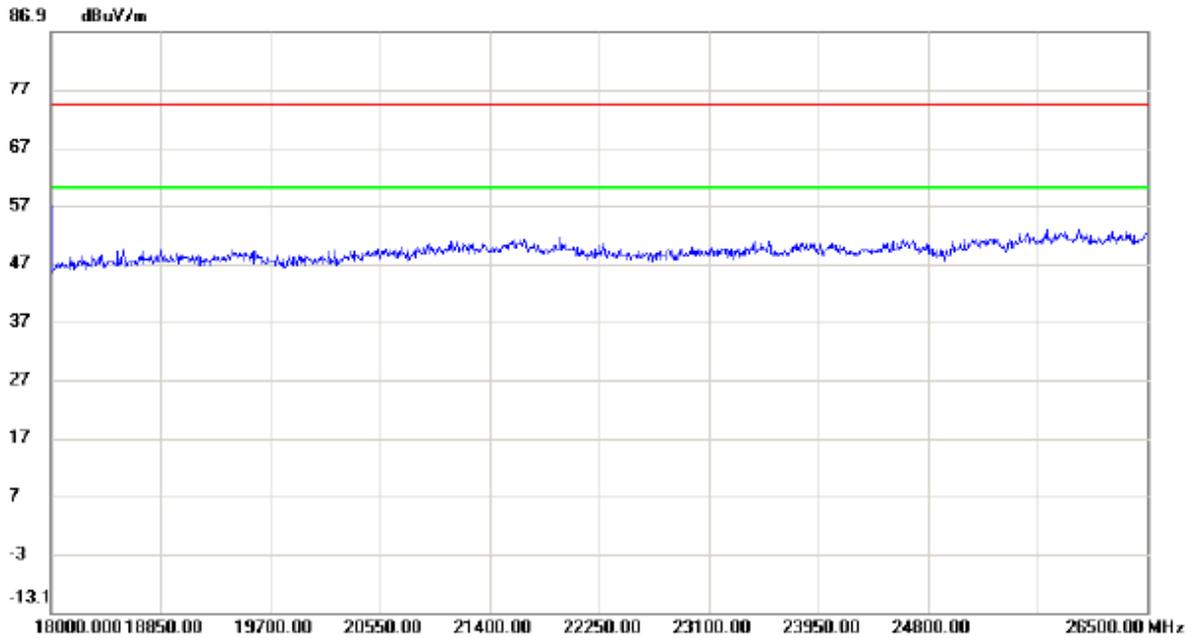


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

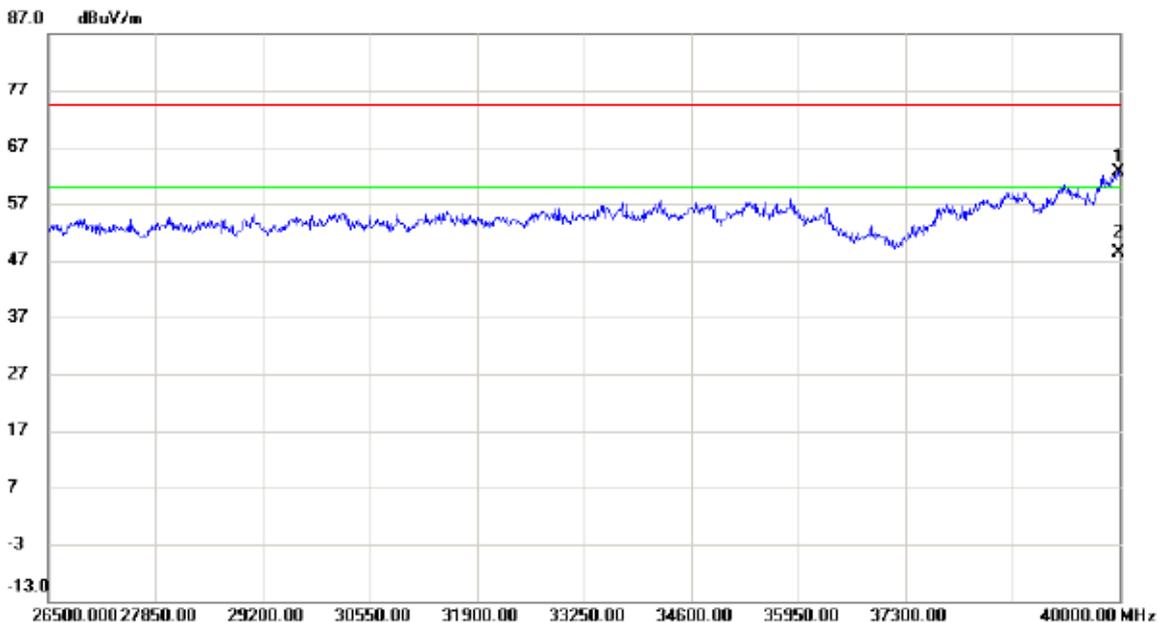

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39986.50	45.08	17.56	62.64	74.30	-11.66	peak	
2		39986.50	30.75	17.56	48.31	60.00	-11.69	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

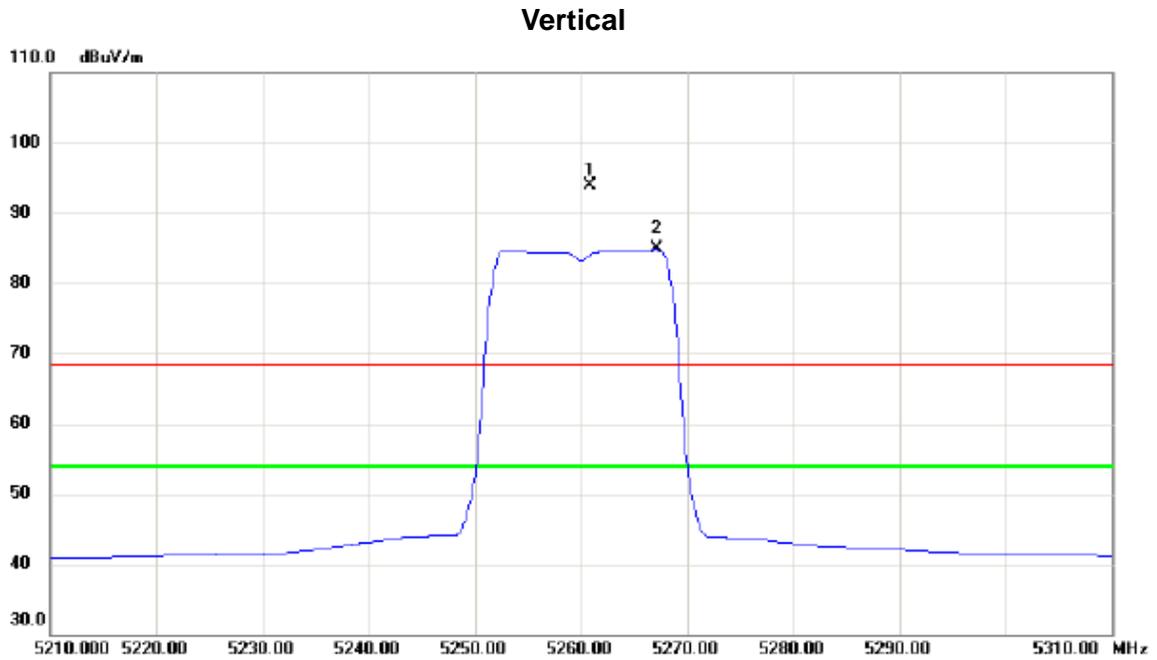


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5260.900	52.82	40.99	93.81	68.30	25.51	peak	No Limit
2	*	5267.100	43.80	41.01	84.81	54.00	30.81	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

### Vertical

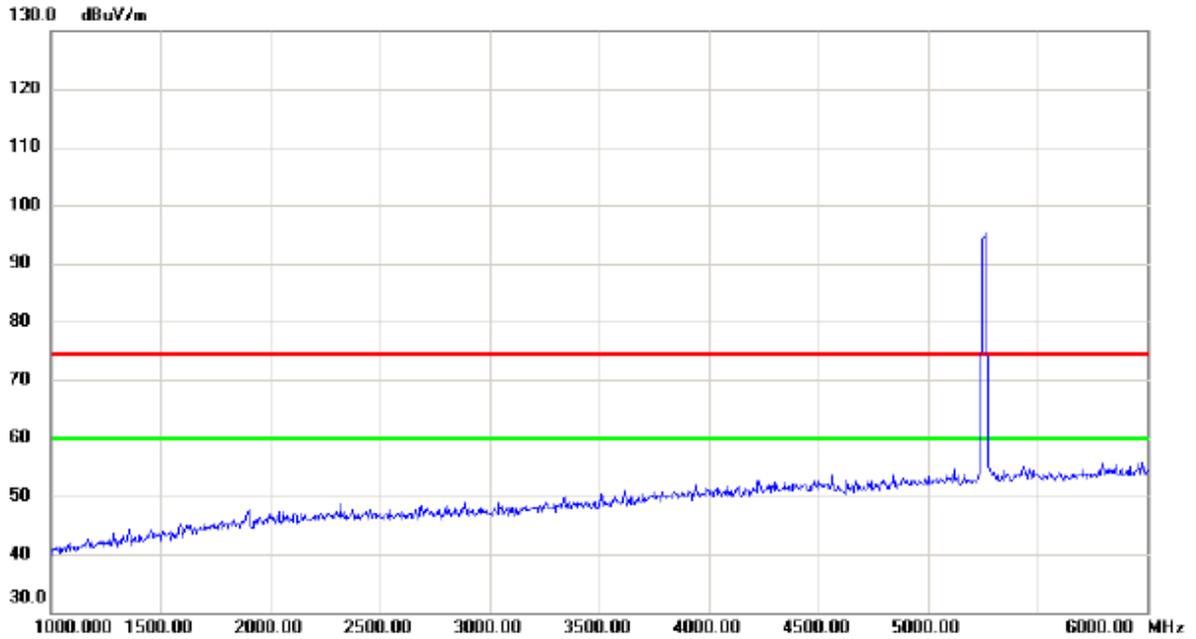


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

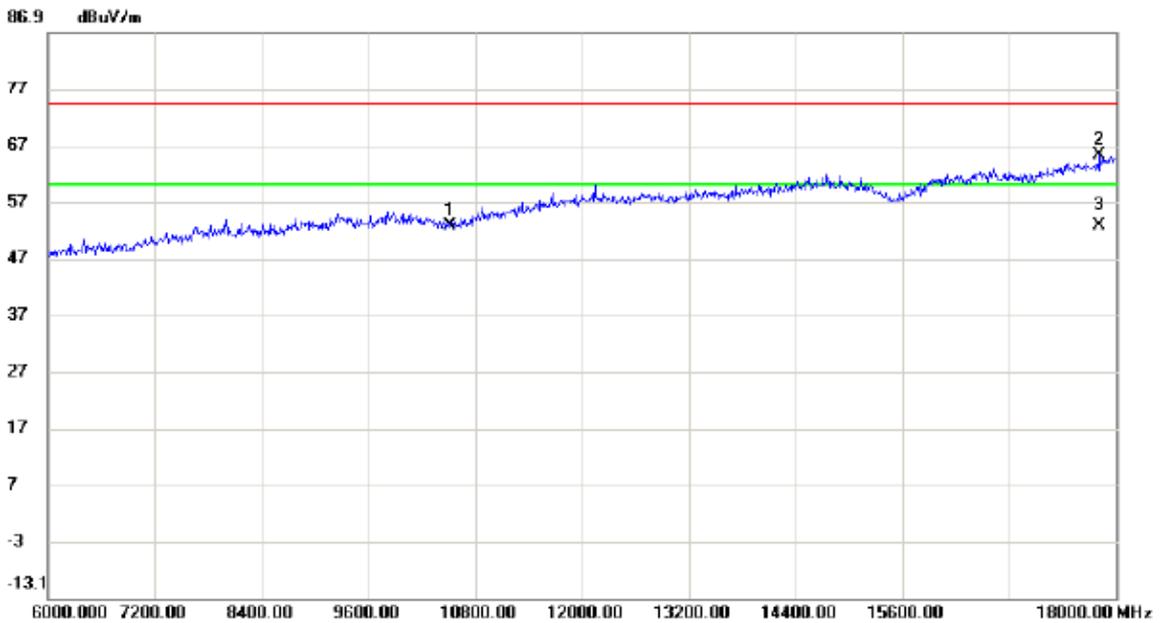


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10520.00	39.01	13.75	52.76	74.30	-21.54	peak	
2		17820.00	42.01	23.30	65.31	74.30	-8.99	peak	
3	*	17820.00	29.46	23.30	52.76	60.00	-7.24	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

### Vertical

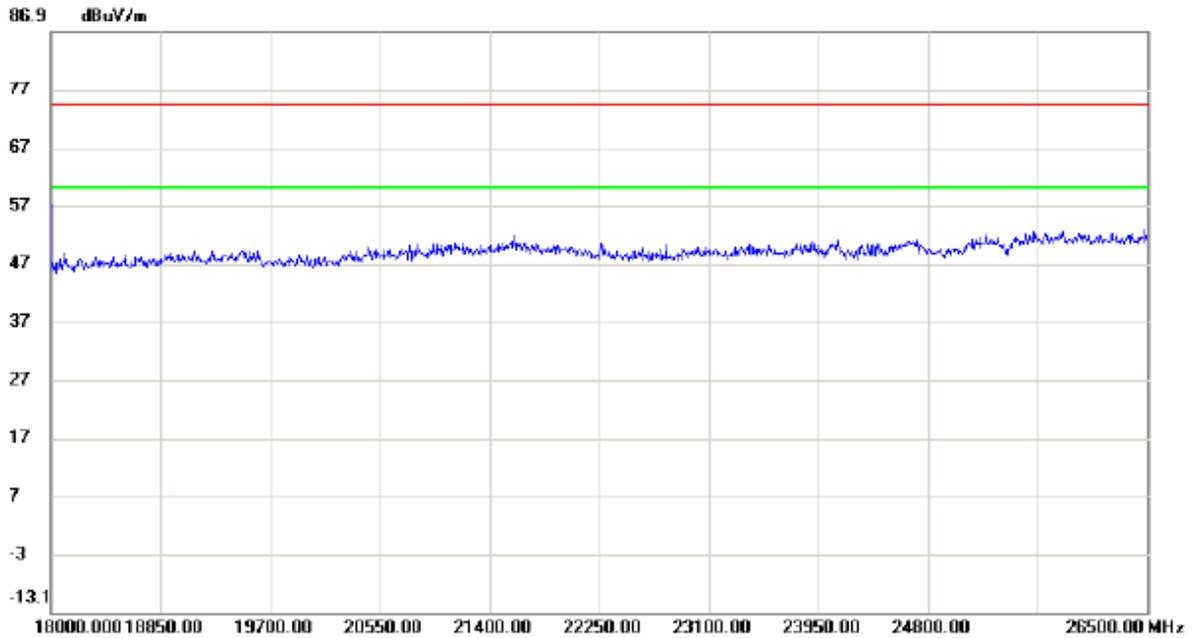


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

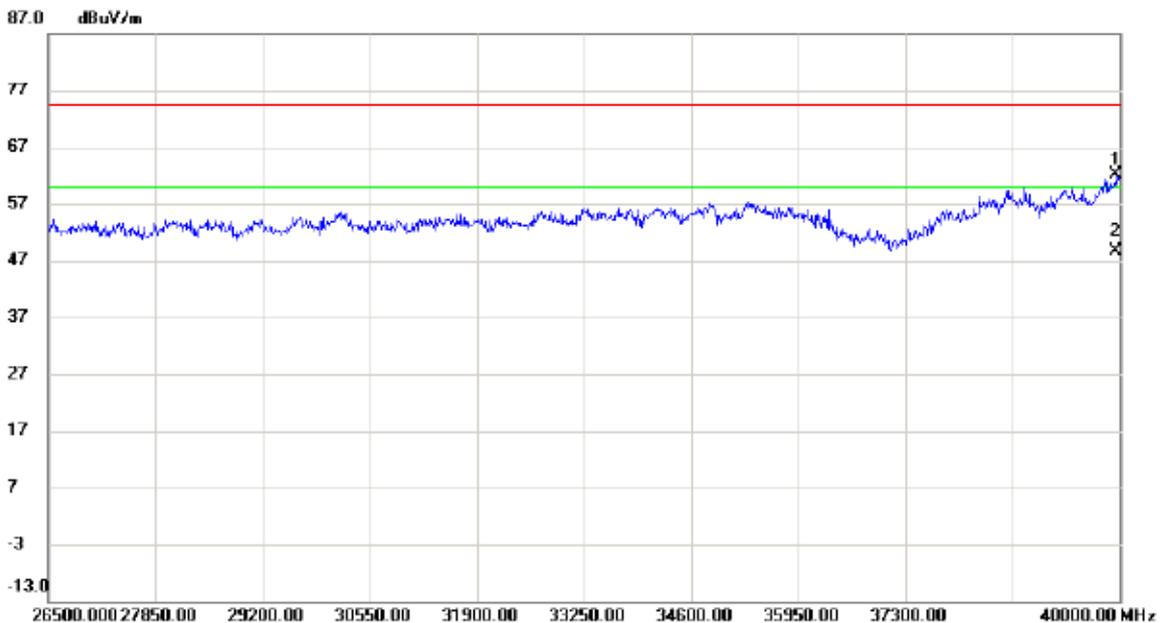

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39959.50	44.58	17.50	62.08	74.30	-12.22	peak	
2	*	39959.50	31.11	17.50	48.61	60.00	-11.39	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


### Horizontal

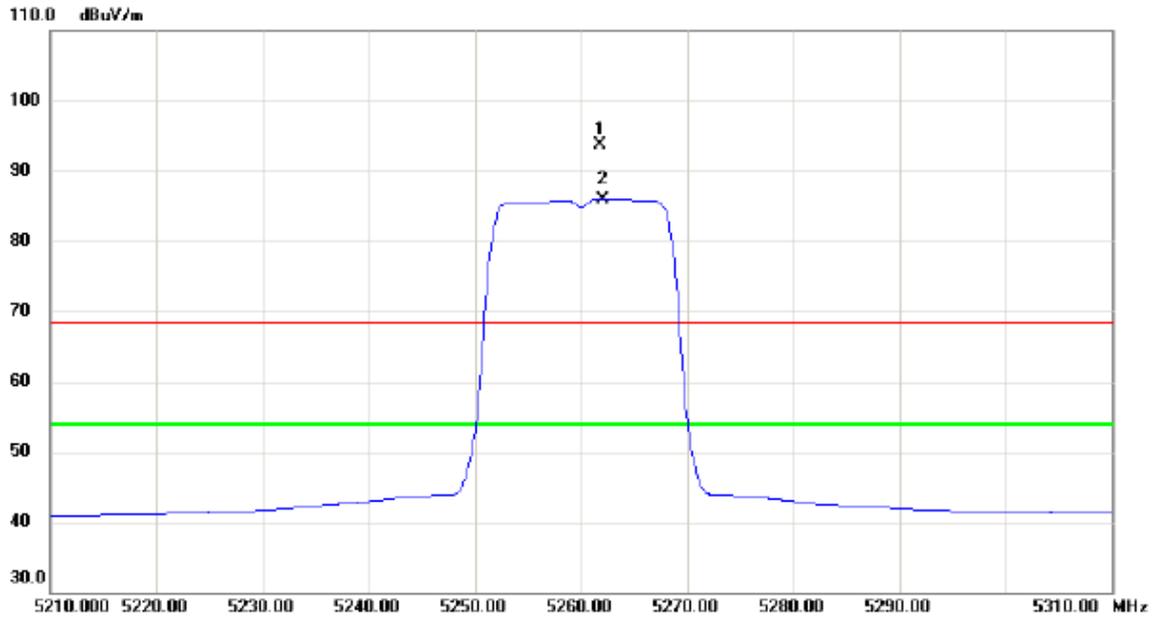


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5261.800	52.80	41.00	93.80	68.30	25.50	peak	No Limit
2	*	5262.100	44.96	41.00	85.96	54.00	31.96	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

### Horizontal

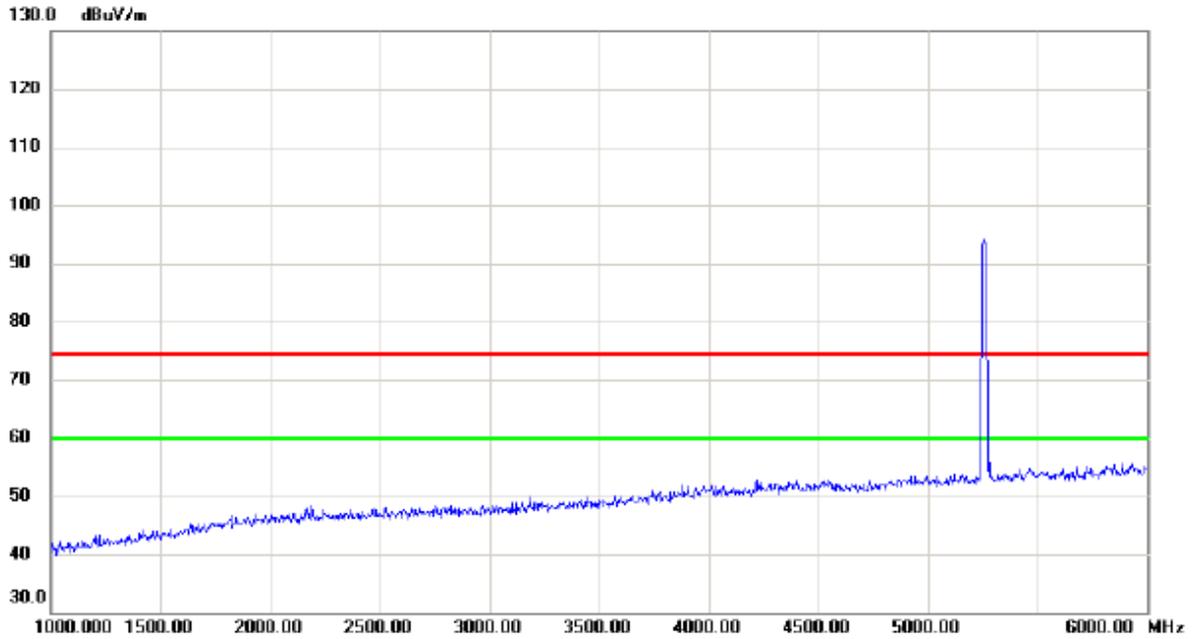


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

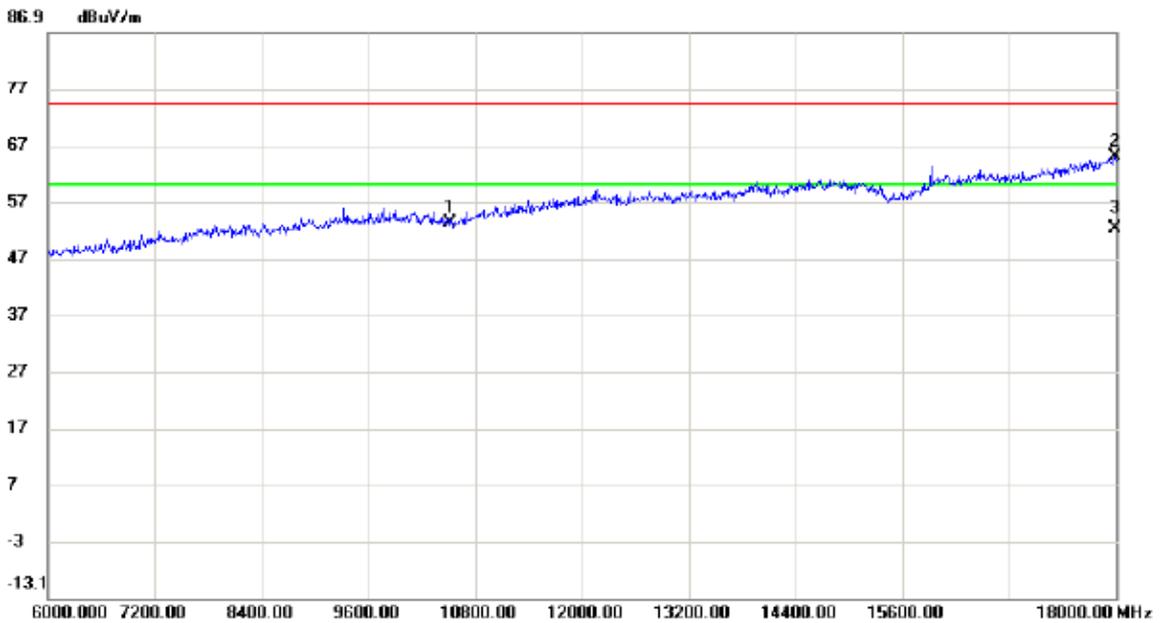


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10520.00	39.47	13.75	53.22	74.30	-21.08	peak	
2		17988.00	41.16	23.80	64.96	74.30	-9.34	peak	
3	*	17988.00	28.57	23.80	52.37	60.00	-7.63	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

### Horizontal

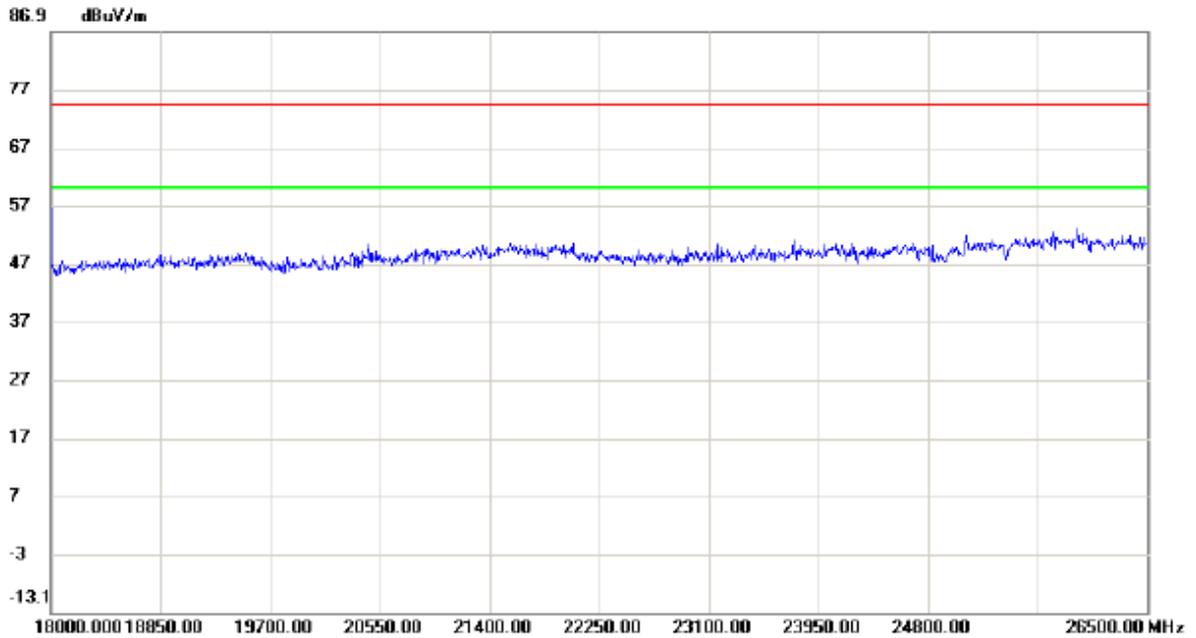


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

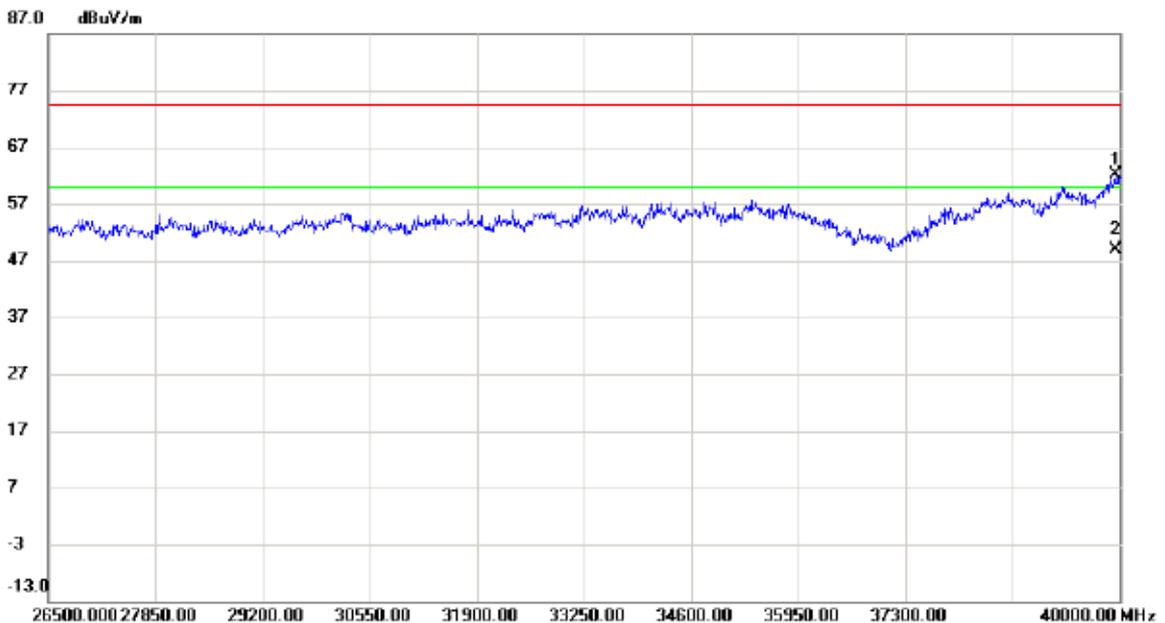

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39946.00	44.75	17.47	62.22	74.30	-12.08	peak	
2	*	39946.00	31.32	17.47	48.79	60.00	-11.21	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

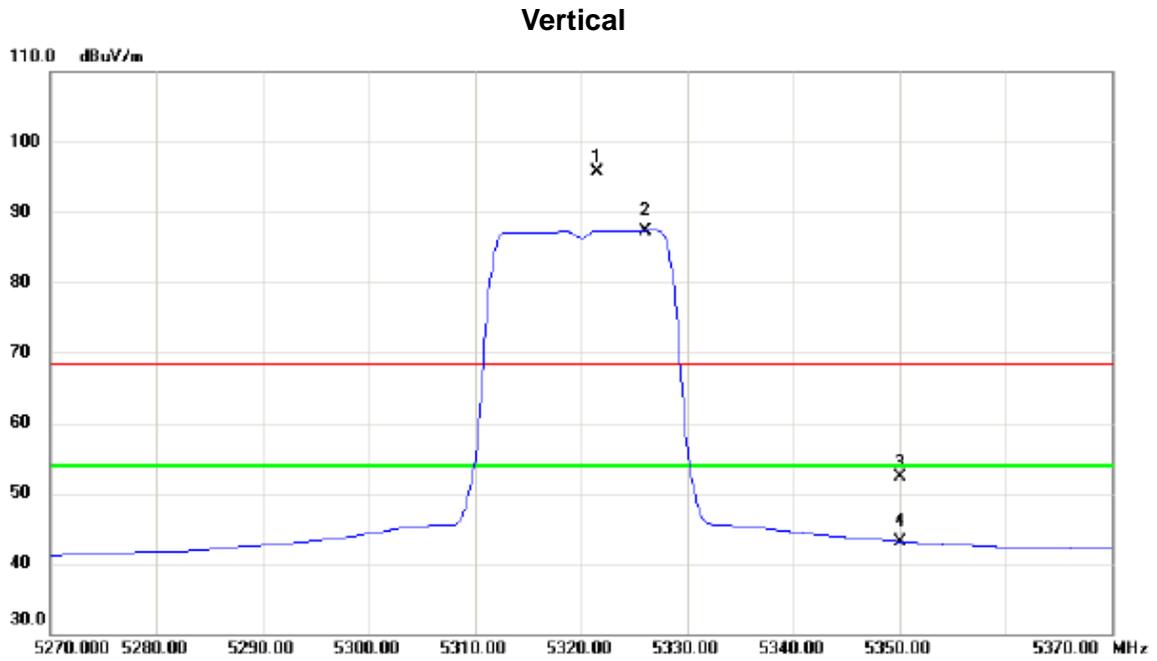


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5321.500	54.54	41.19	95.73	68.30	27.43	peak	No Limit
2	*	5326.100	46.20	41.20	87.40	54.00	33.40	AVG	No Limit
3		5350.000	11.00	41.28	52.28	68.30	-16.02	peak	
4		5350.000	1.85	41.28	43.13	54.00	-10.87	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

### Vertical

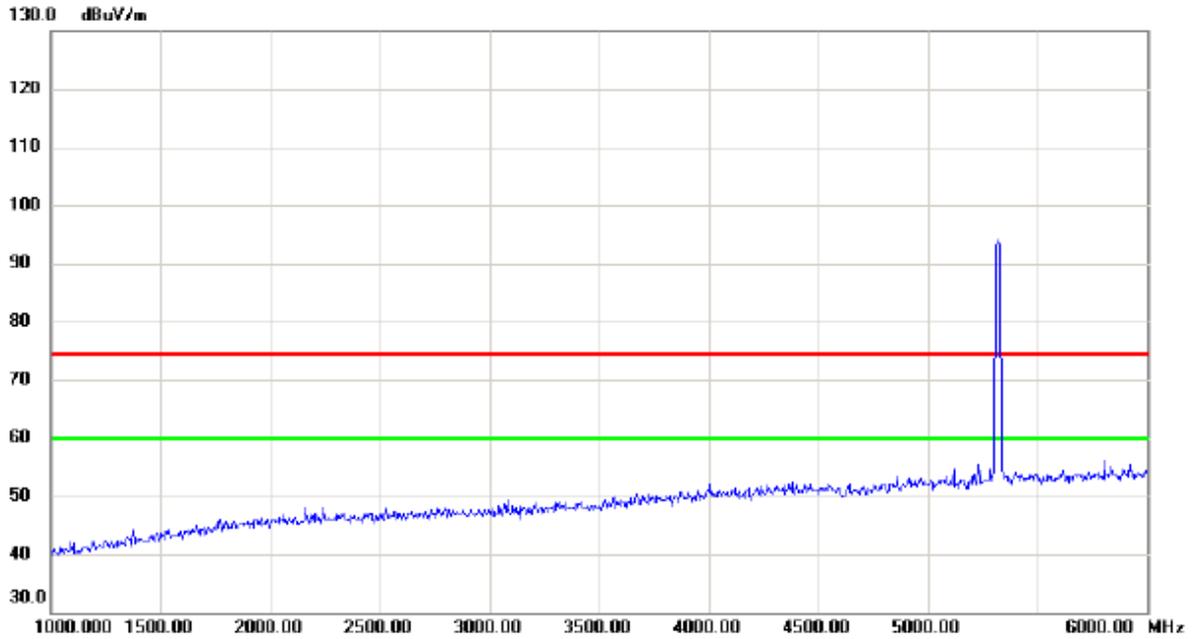


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

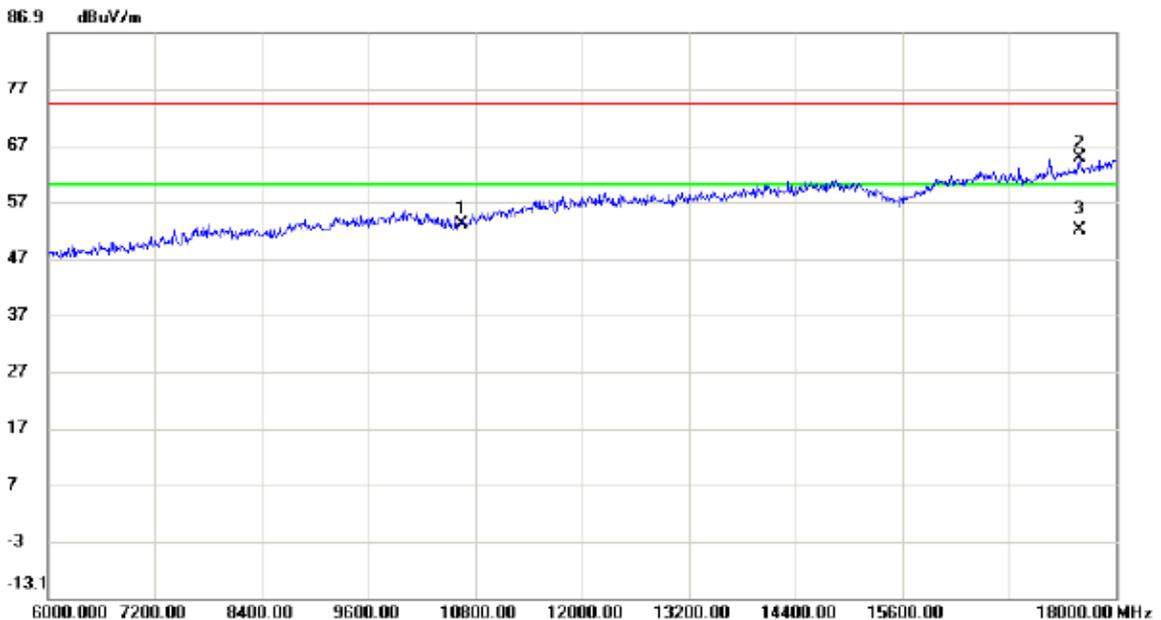


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	38.72	14.25	52.97	74.30	-21.33	peak	
2		17592.00	42.07	22.64	64.71	74.30	-9.59	peak	
3	*	17592.00	29.46	22.64	52.10	60.00	-7.90	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

### Vertical

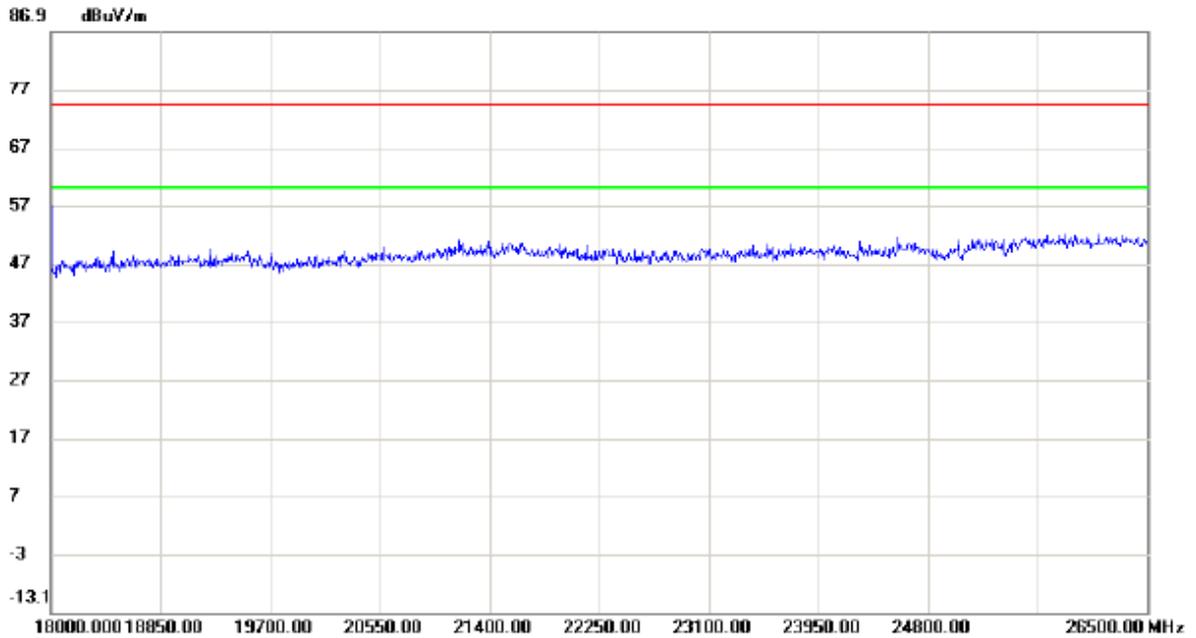


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

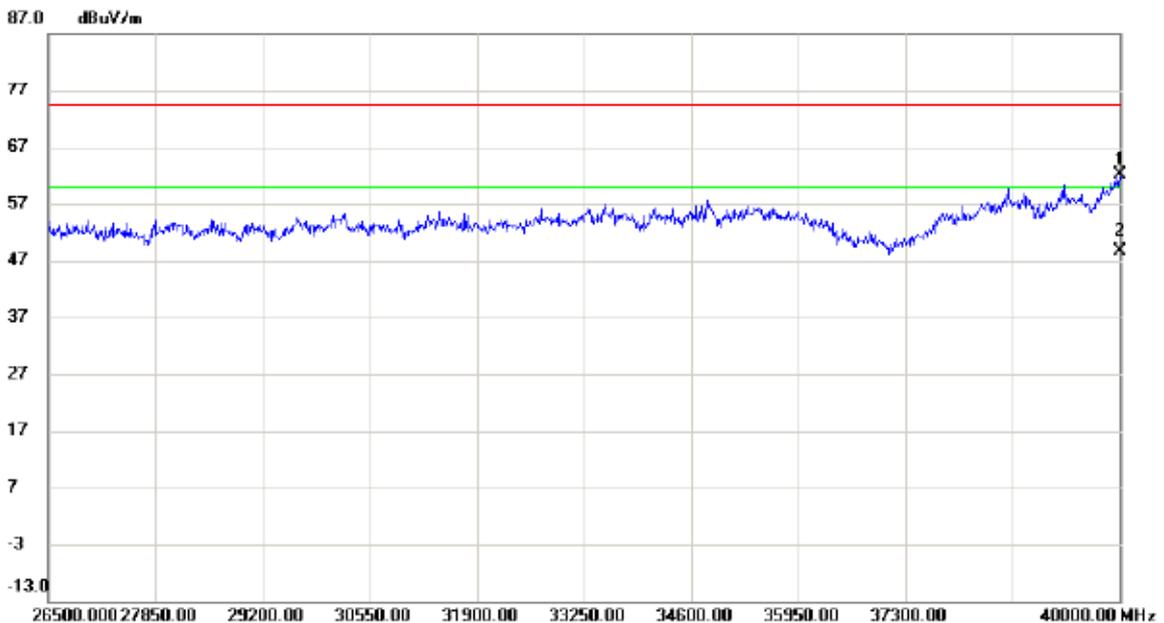

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	44.43	17.60	62.03	74.30	-12.27	peak	
2	*	40000.00	31.05	17.60	48.65	60.00	-11.35	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


### Horizontal

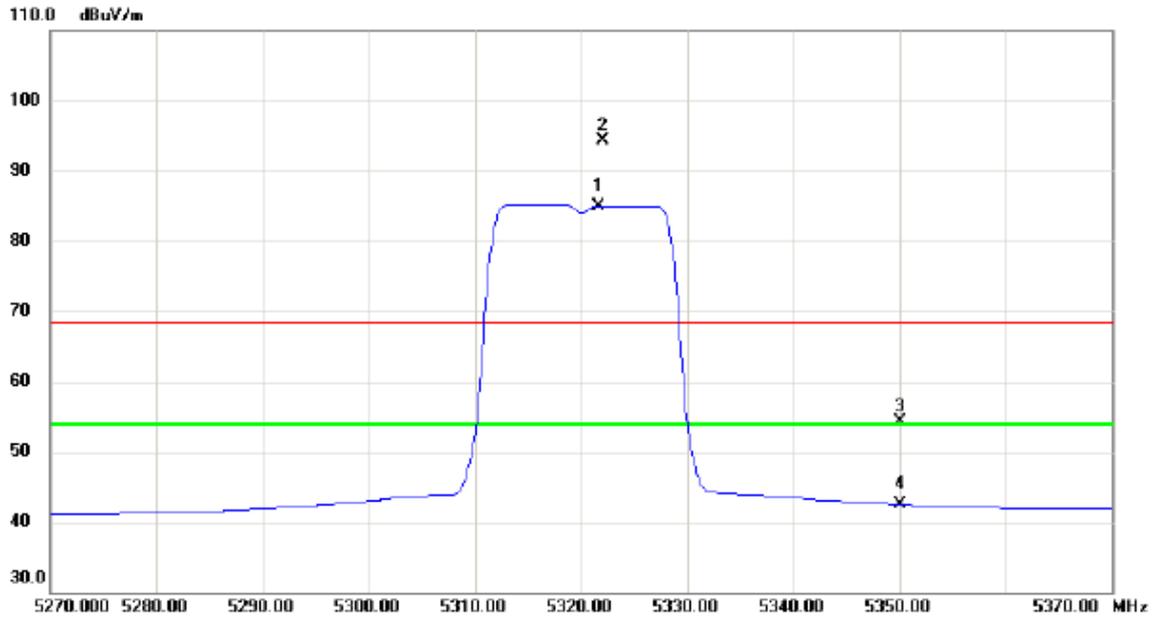


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5321.700	43.75	41.19	84.94	54.00	30.94	AVG	No Limit
2	X	5322.100	53.19	41.19	94.38	68.30	26.08	peak	No Limit
3		5350.000	13.08	41.28	54.36	68.30	-13.94	peak	
4		5350.000	1.19	41.28	42.47	54.00	-11.53	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

### Horizontal

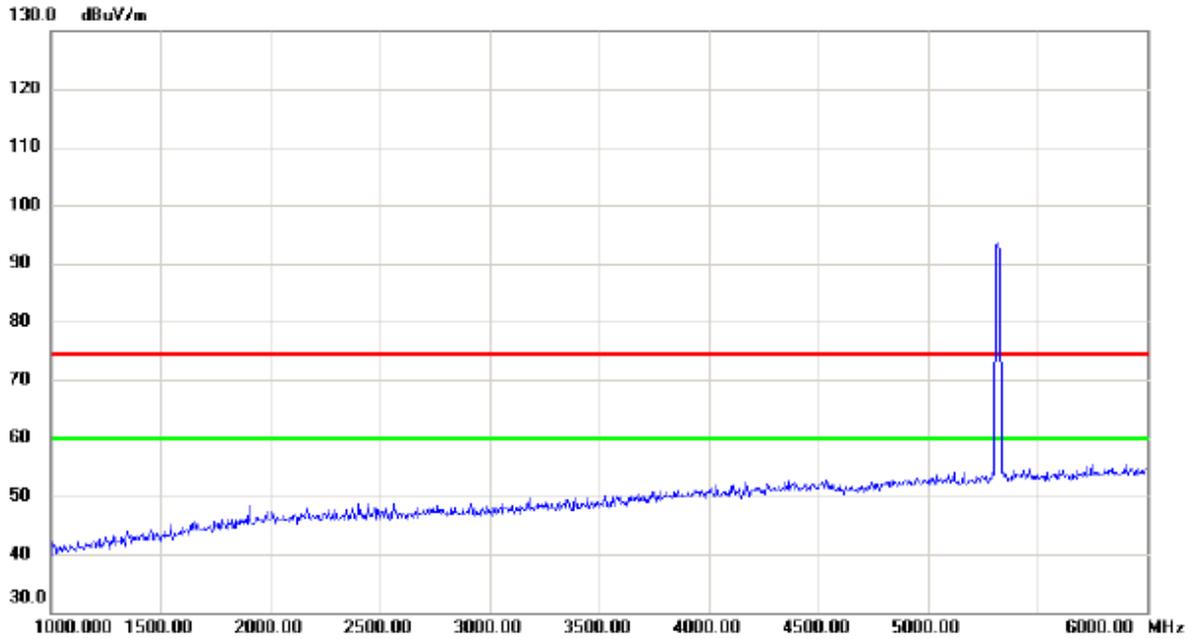


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

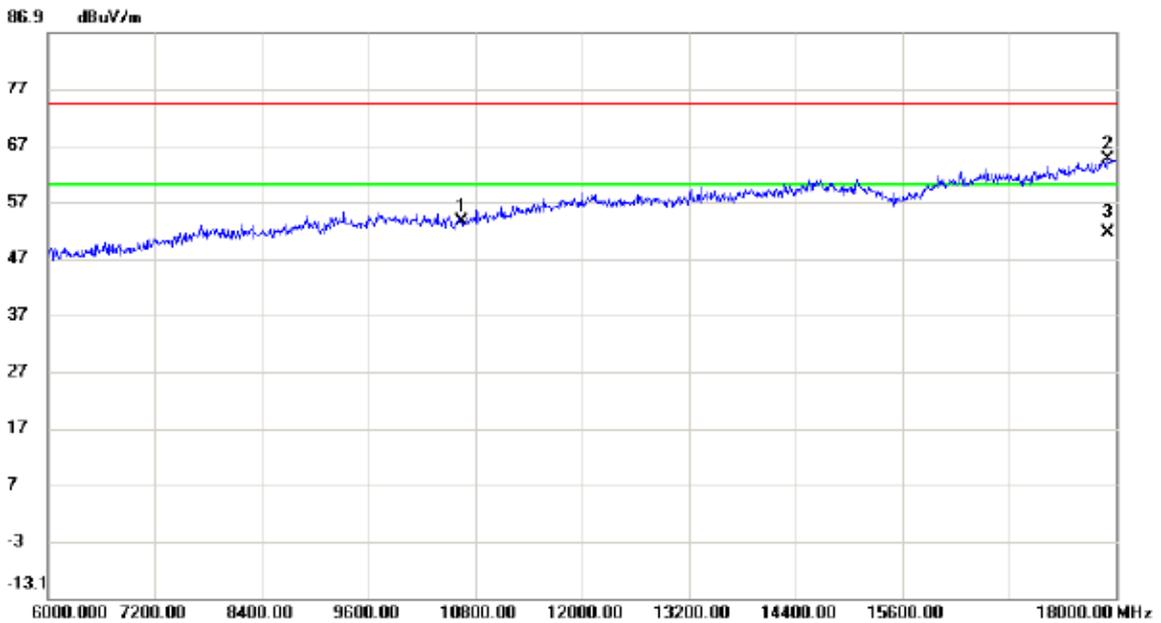


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	39.32	14.25	53.57	74.30	-20.73	peak	
2		17904.00	41.09	23.55	64.64	74.30	-9.66	peak	
3	*	17904.00	28.06	23.55	51.61	60.00	-8.39	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

### Horizontal

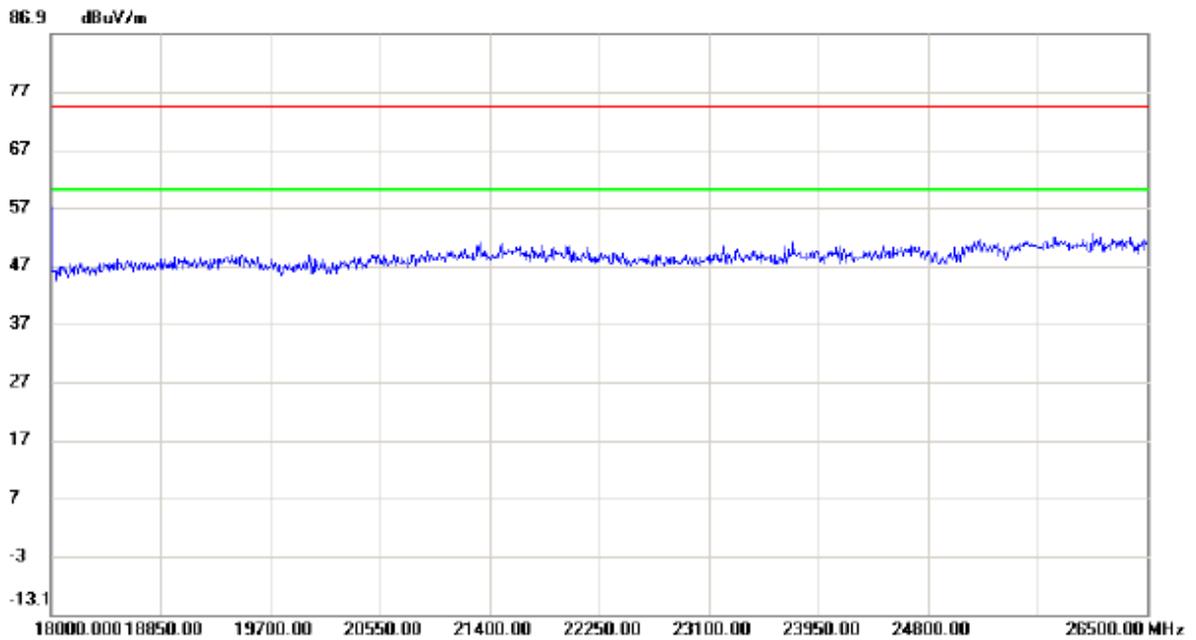


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

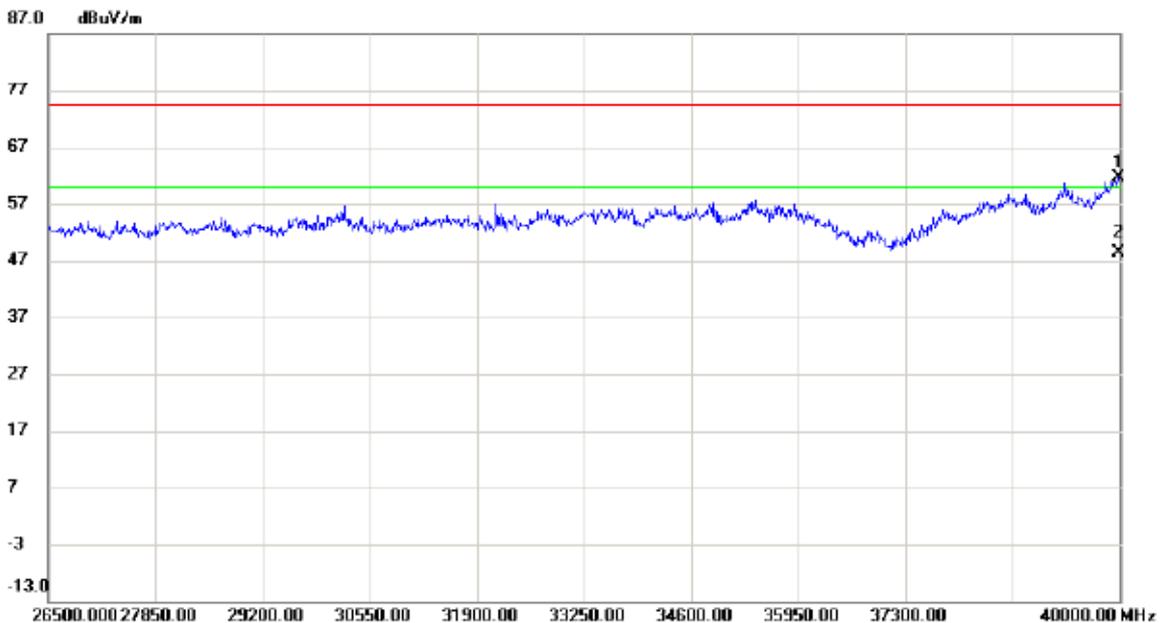

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39986.50	44.07	17.56	61.63	74.30	-12.67	peak	
2	*	39986.50	30.86	17.56	48.42	60.00	-11.58	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


### Vertical

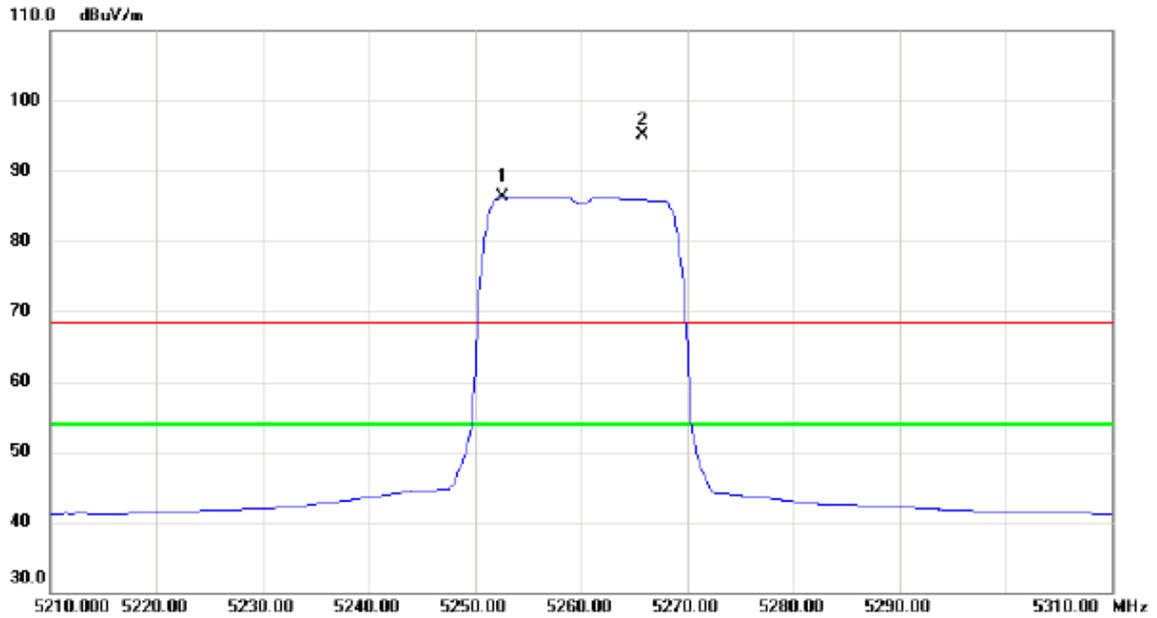


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5252.600	45.30	40.97	86.27	54.00	32.27	AVG	No Limit
2	X	5265.800	54.11	41.01	95.12	68.30	26.82	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

### Vertical

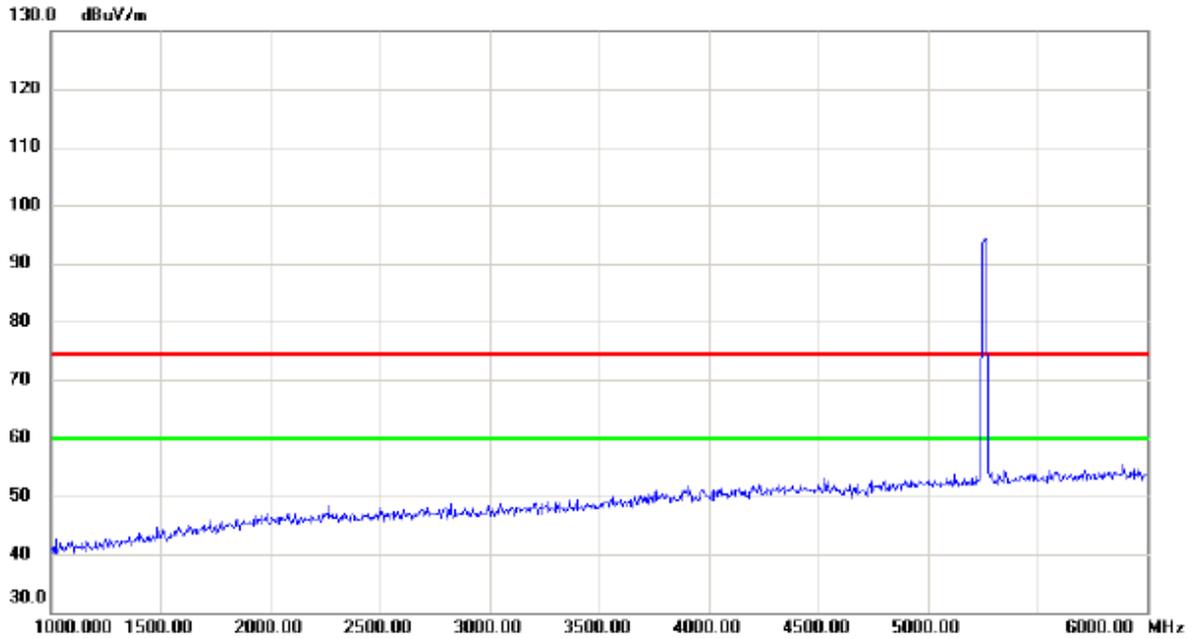


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

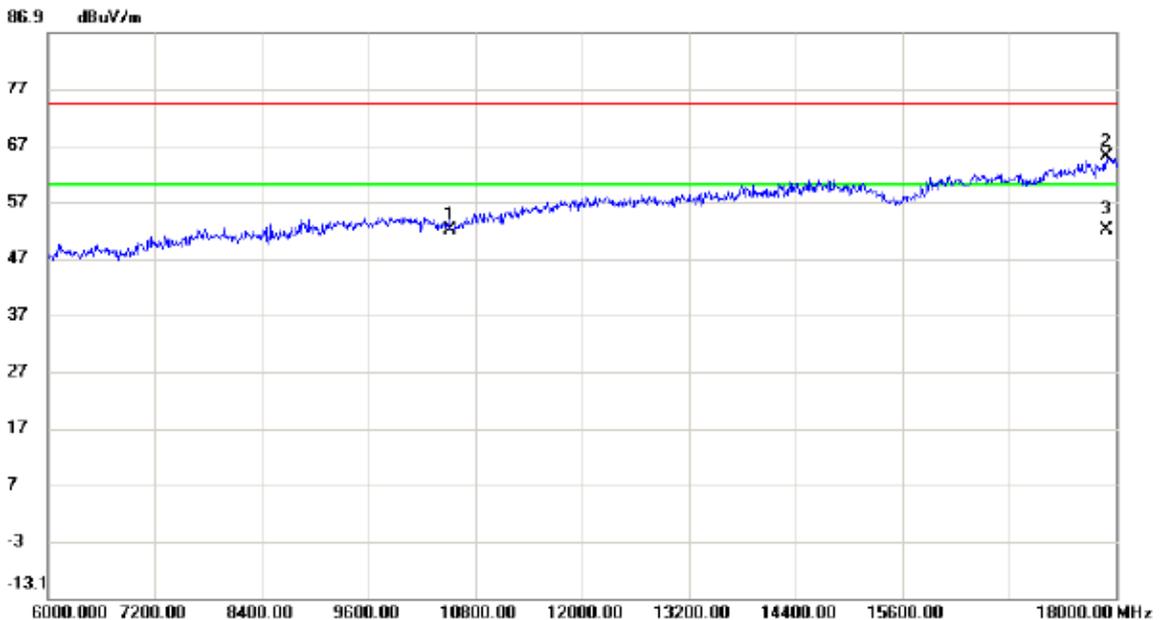


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10520.00	38.18	13.75	51.93	74.30	-22.37	peak	
2		17892.00	41.56	23.51	65.07	74.30	-9.23	peak	
3	*	17892.00	28.61	23.51	52.12	60.00	-7.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

### Vertical

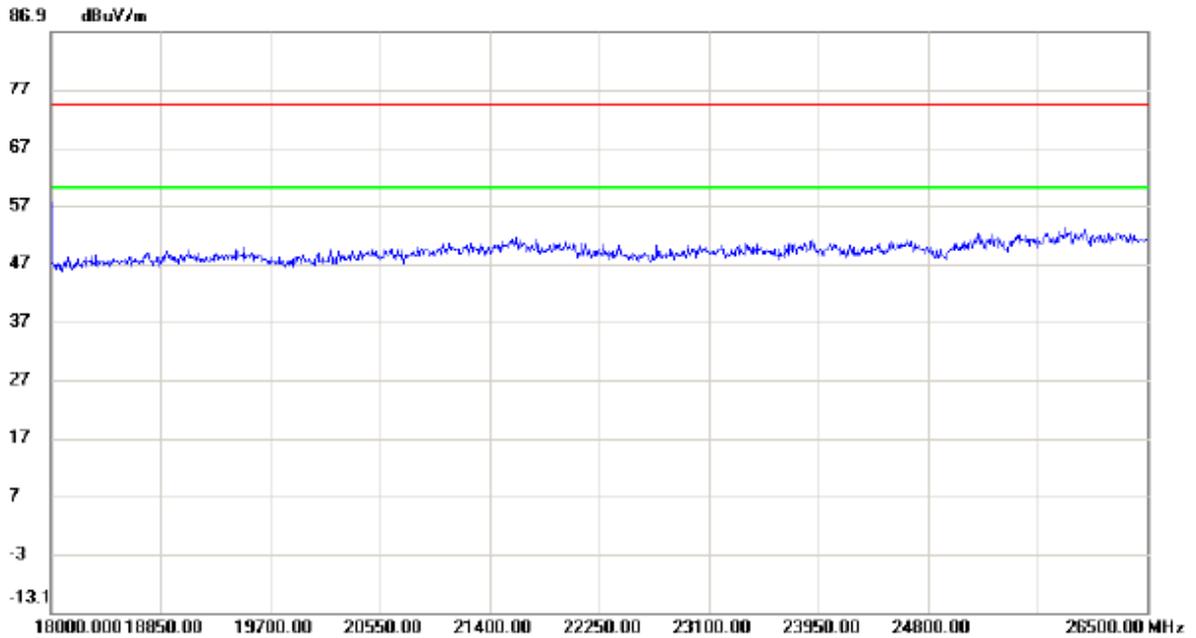


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

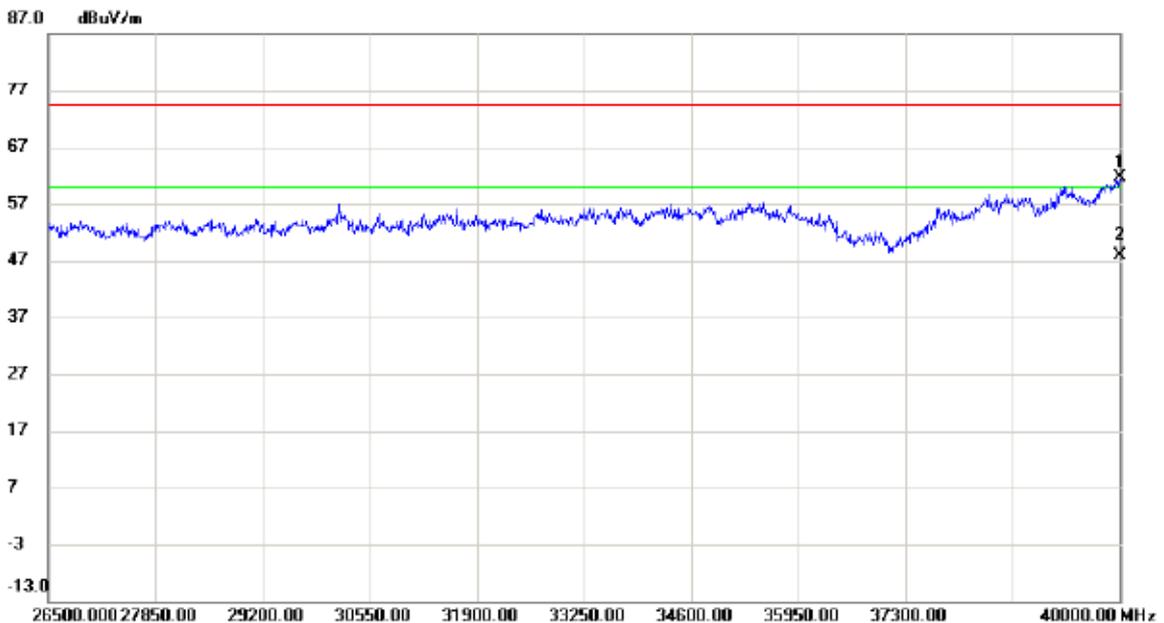

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	43.92	17.60	61.52	74.30	-12.78	peak	
2	*	40000.00	30.36	17.60	47.96	60.00	-12.04	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


### Horizontal

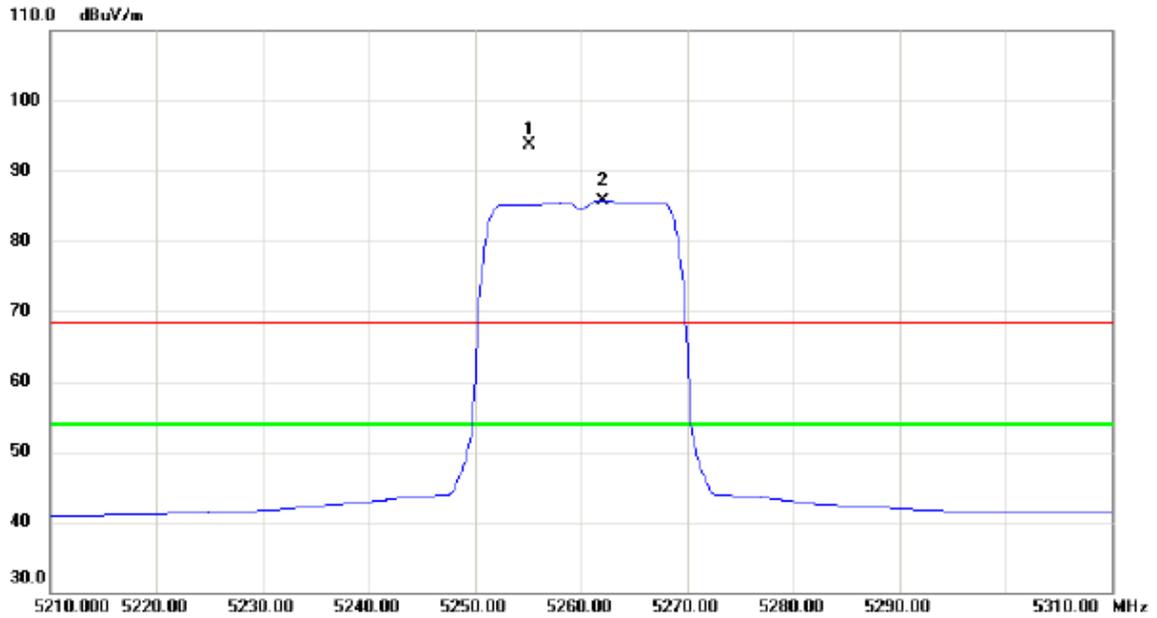


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5255.200	52.70	40.97	93.67	68.30	25.37	peak	No Limit
2	*	5262.000	44.65	41.00	85.65	54.00	31.65	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

### Horizontal

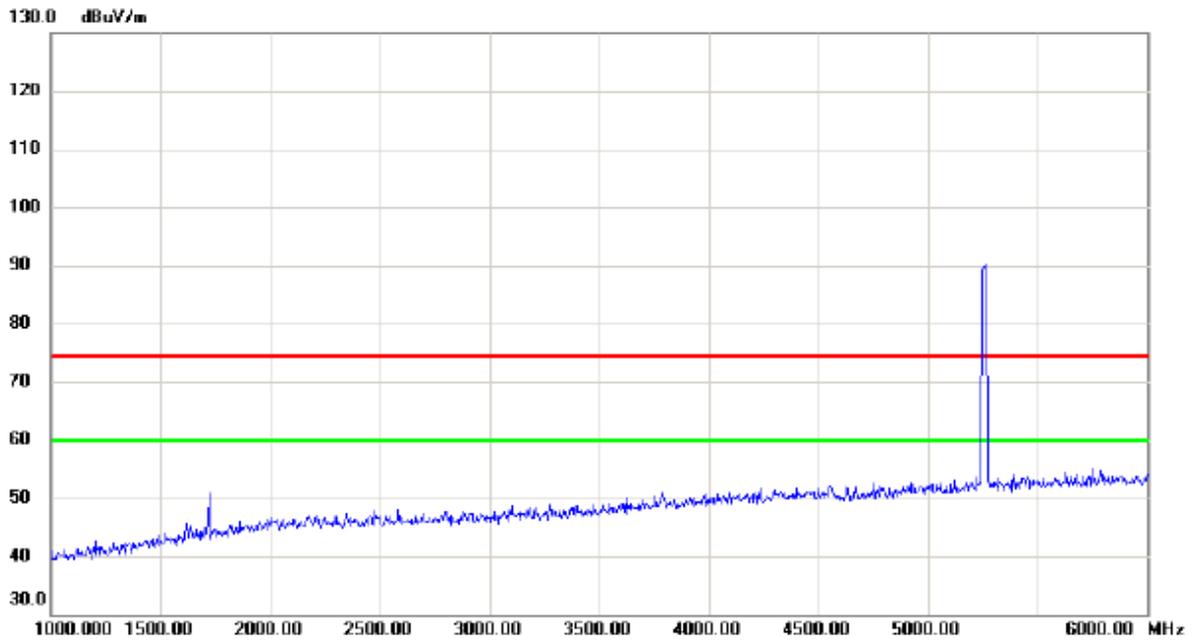


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

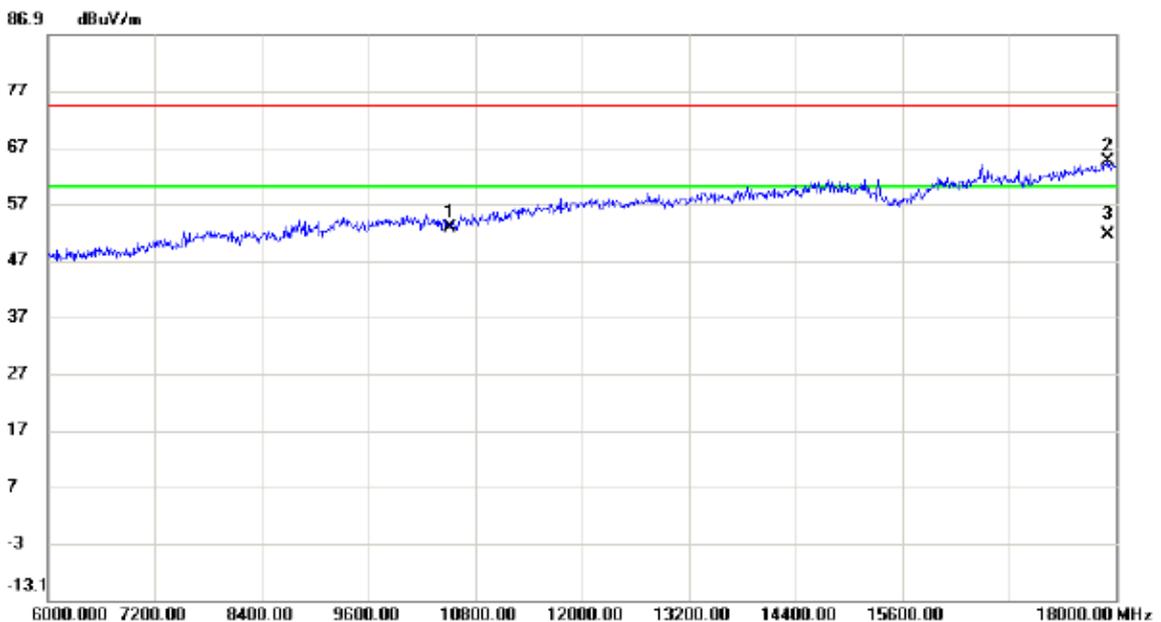


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10520.00	39.07	13.75	52.82	74.30	-21.48	peak	
2		17916.00	40.86	23.58	64.44	74.30	-9.86	peak	
3	*	17916.00	27.86	23.58	51.44	60.00	-8.56	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

### Horizontal

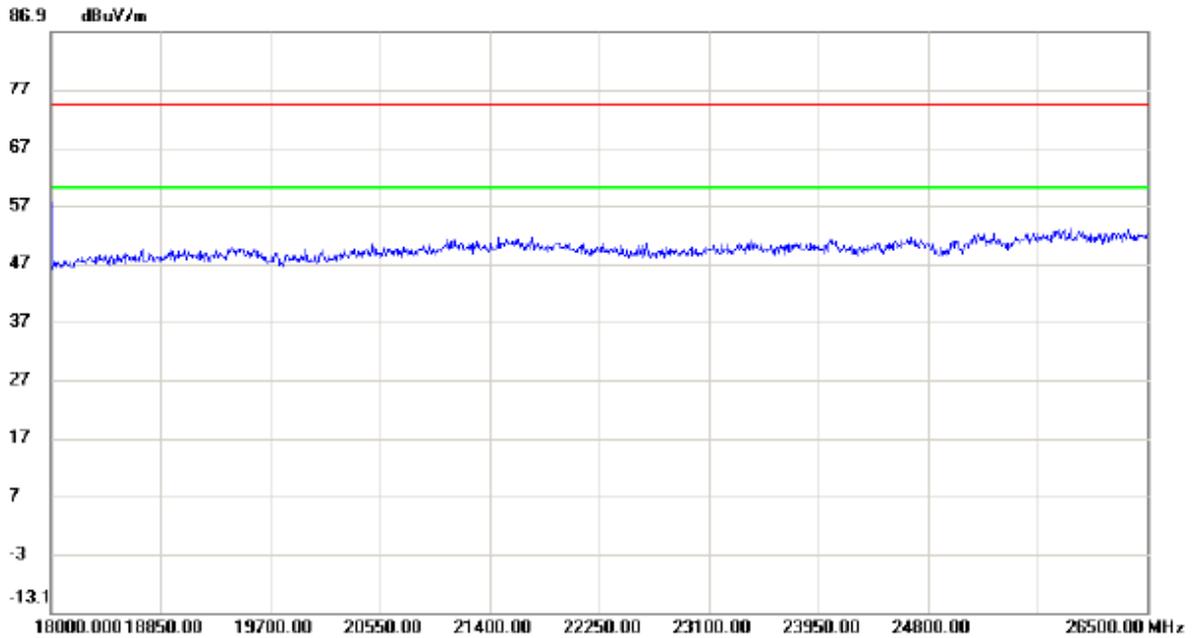


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

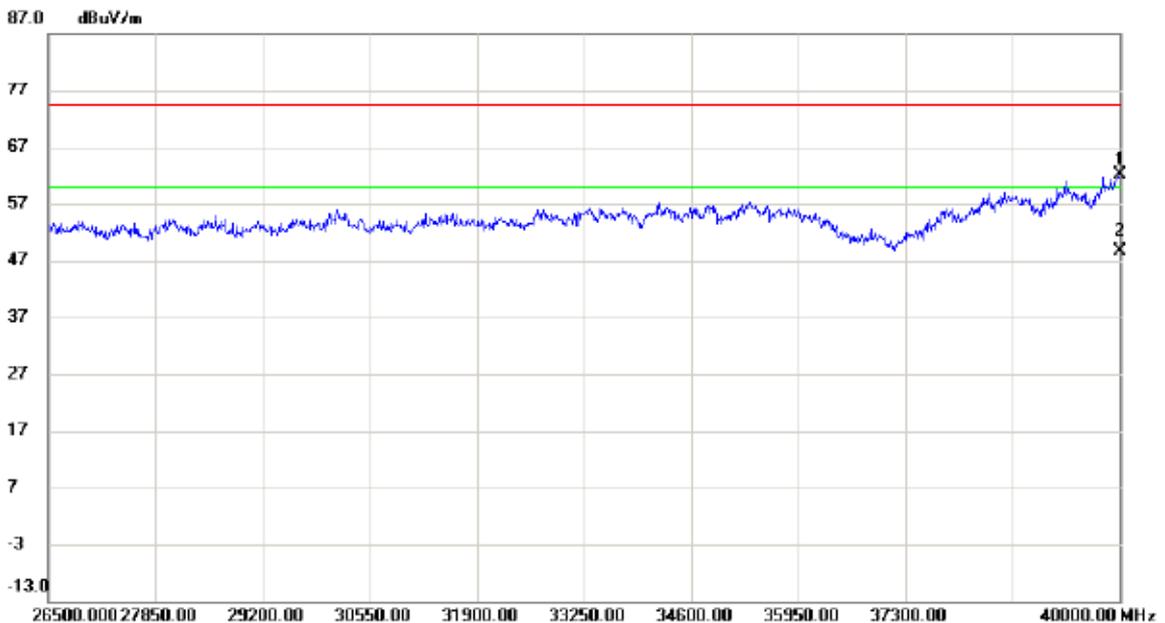

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	44.48	17.60	62.08	74.30	-12.22	peak	
2	*	40000.00	31.15	17.60	48.75	60.00	-11.25	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


### Vertical

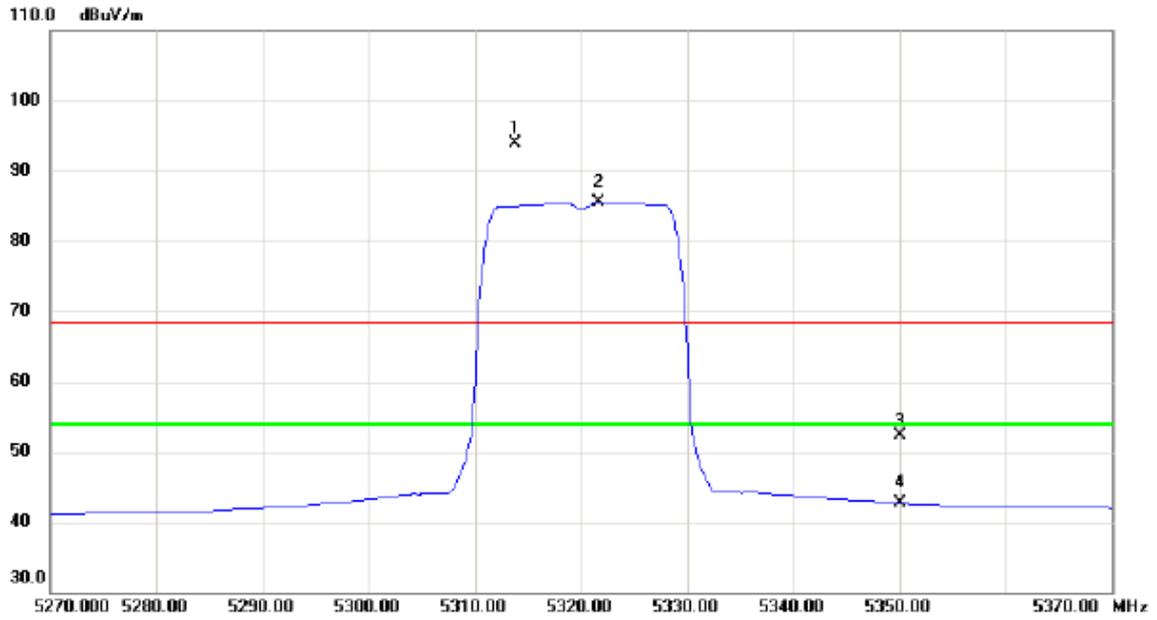


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5313.800	52.83	41.16	93.99	68.30	25.69	peak	No Limit
2	*	5321.600	44.27	41.19	85.46	54.00	31.46	AVG	No Limit
3		5350.000	11.09	41.28	52.37	68.30	-15.93	peak	
4		5350.000	1.40	41.28	42.68	54.00	-11.32	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

### Vertical

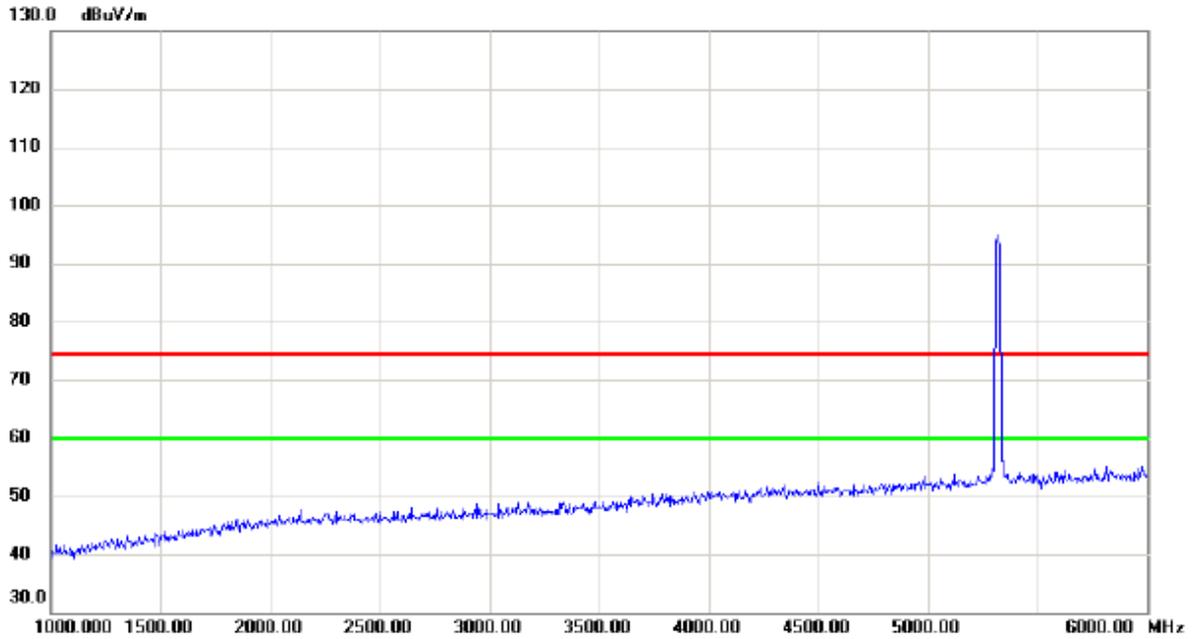


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

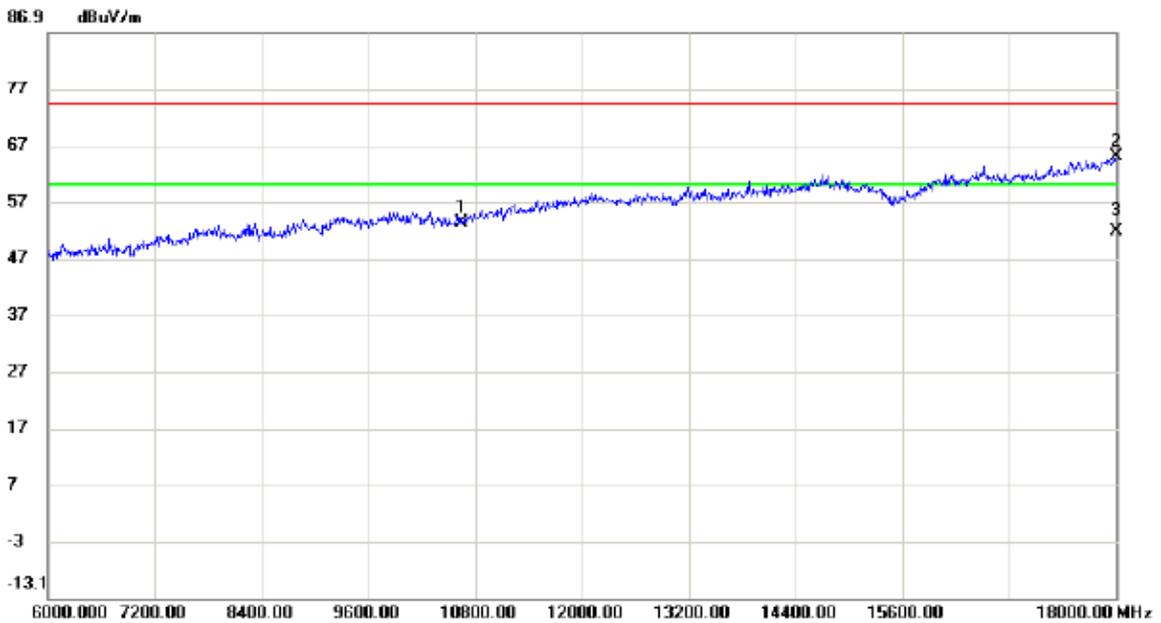


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	39.00	14.25	53.25	74.30	-21.05	peak	
2		18000.00	41.25	23.83	65.08	74.30	-9.22	peak	
3	*	18000.00	28.04	23.83	51.87	60.00	-8.13	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

### Vertical

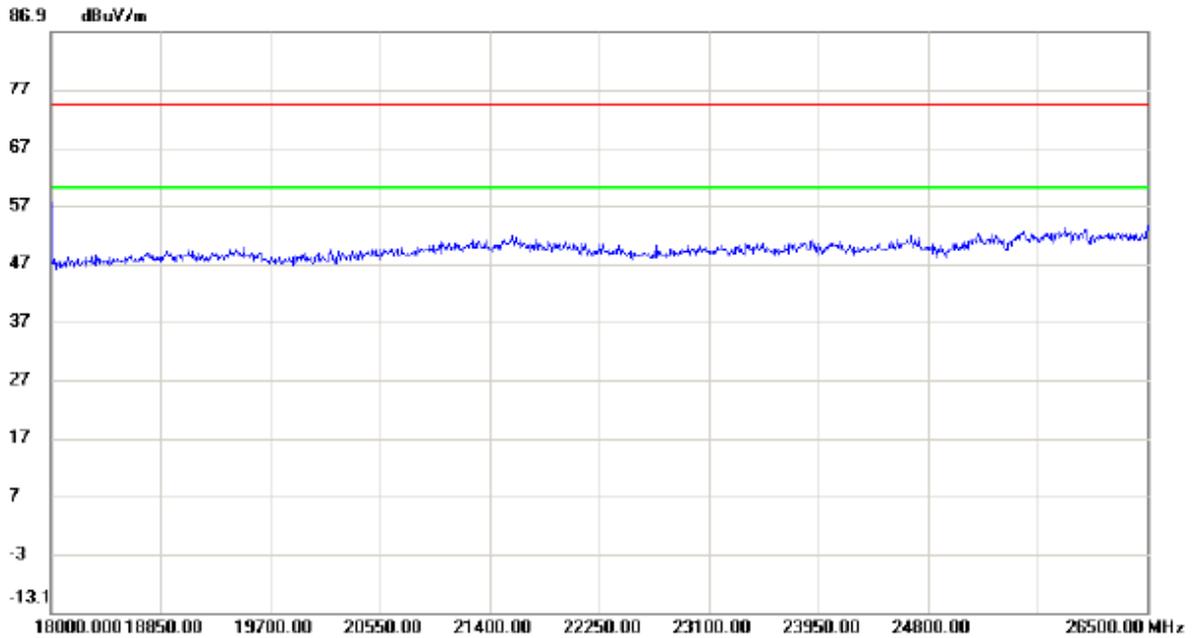


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

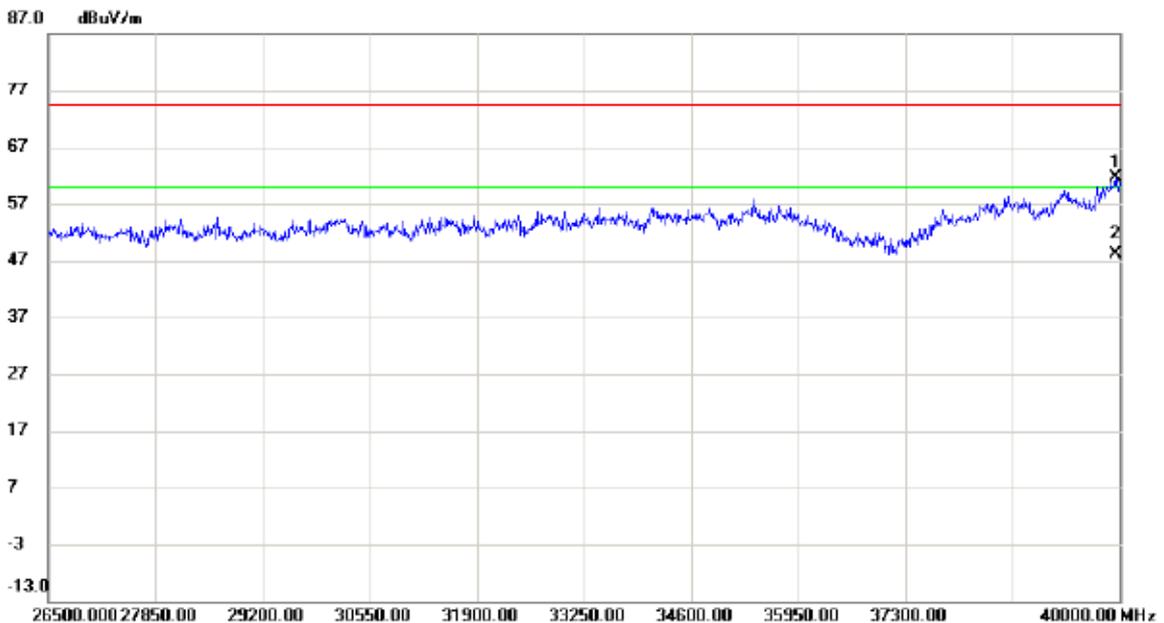

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39946.00	44.04	17.47	61.51	74.30	-12.79	peak	
2	*	39946.00	30.57	17.47	48.04	60.00	-11.96	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


### Horizontal

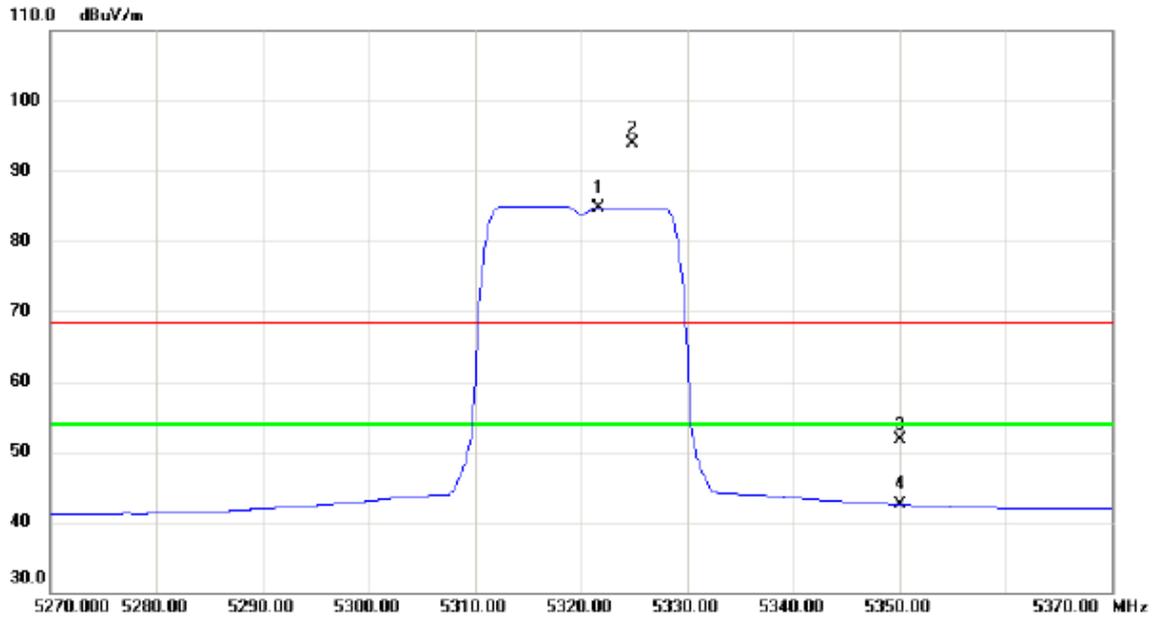


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5321.600	43.54	41.19	84.73	54.00	30.73	AVG	No Limit
2	X	5324.800	52.71	41.20	93.91	68.30	25.61	peak	No Limit
3		5350.000	10.46	41.28	51.74	68.30	-16.56	peak	
4		5350.000	1.20	41.28	42.48	54.00	-11.52	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

### Horizontal

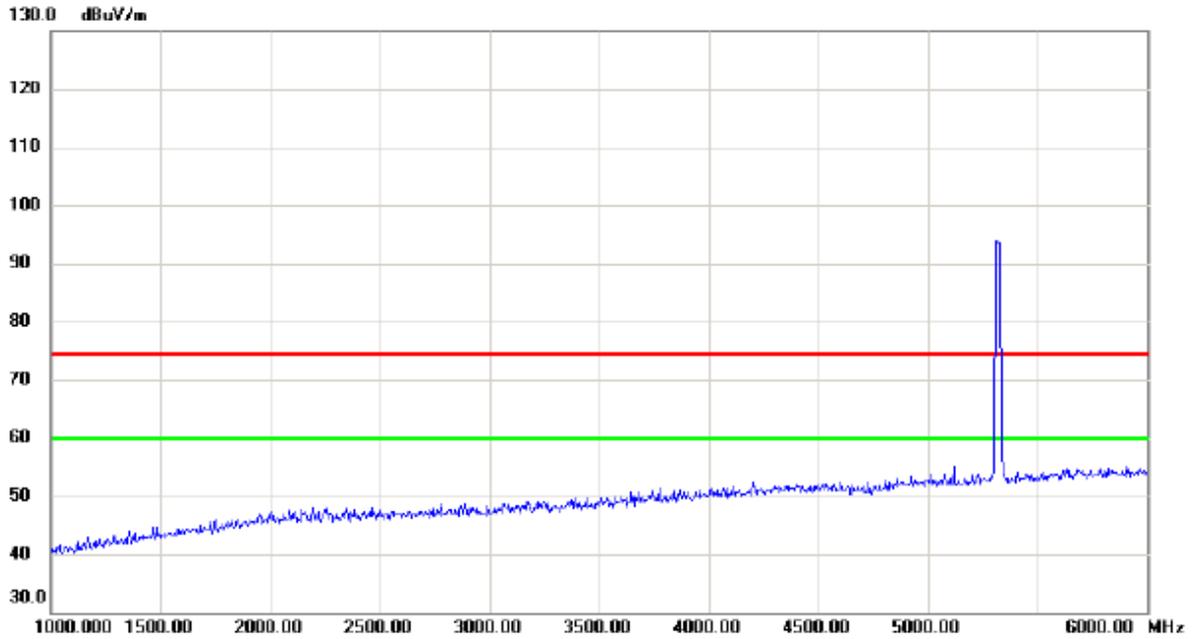


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

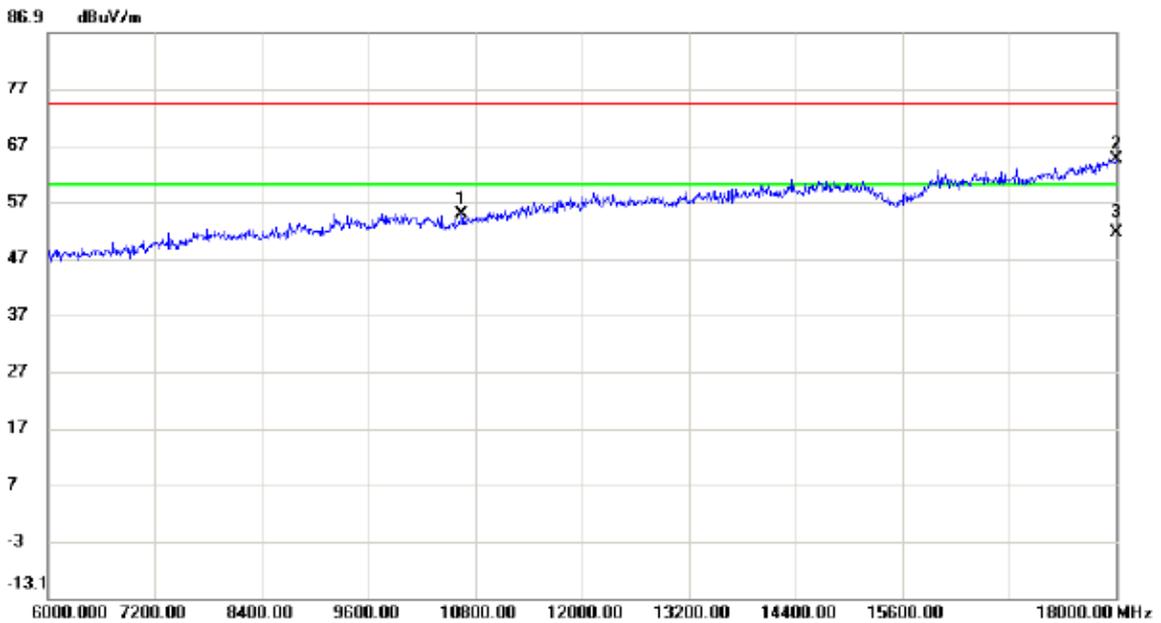


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	40.46	14.25	54.71	74.30	-19.59	peak	
2		18000.00	40.70	23.83	64.53	74.30	-9.77	peak	
3	*	18000.00	27.73	23.83	51.56	60.00	-8.44	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

### Horizontal

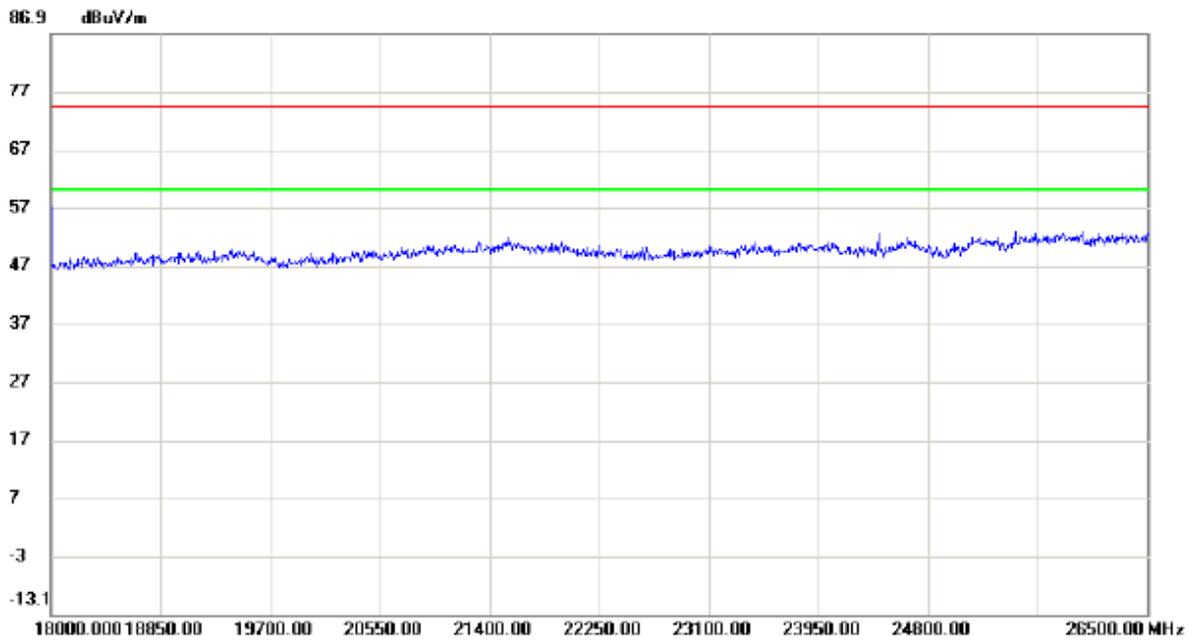


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

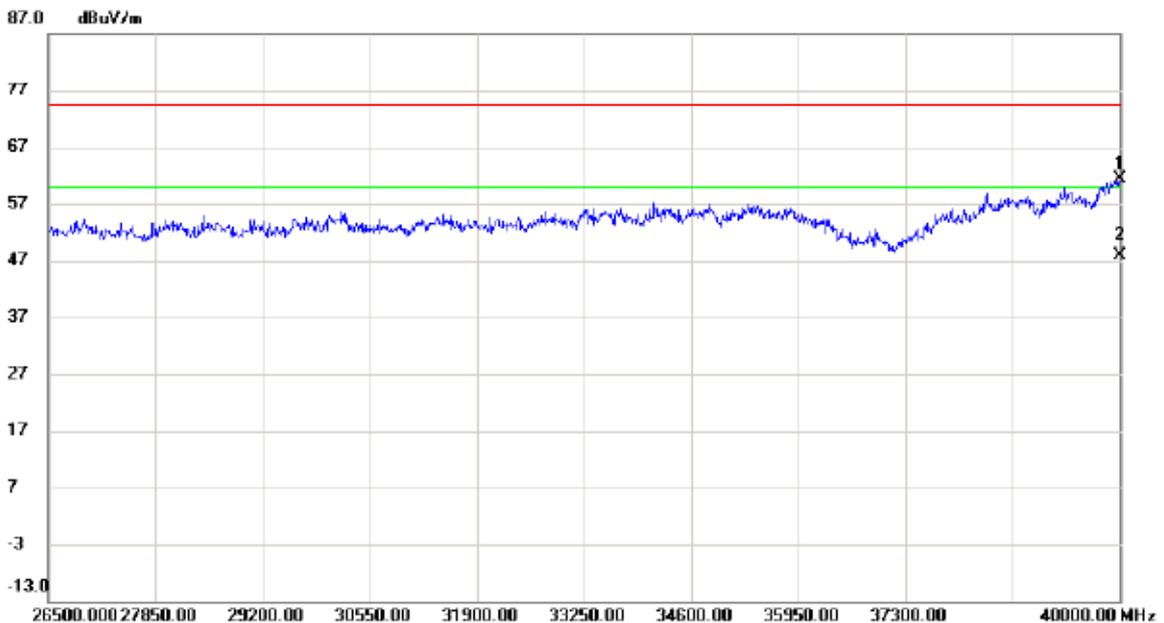

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	43.66	17.60	61.26	74.30	-13.04	peak	
2	*	40000.00	30.24	17.60	47.84	60.00	-12.16	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


### Vertical

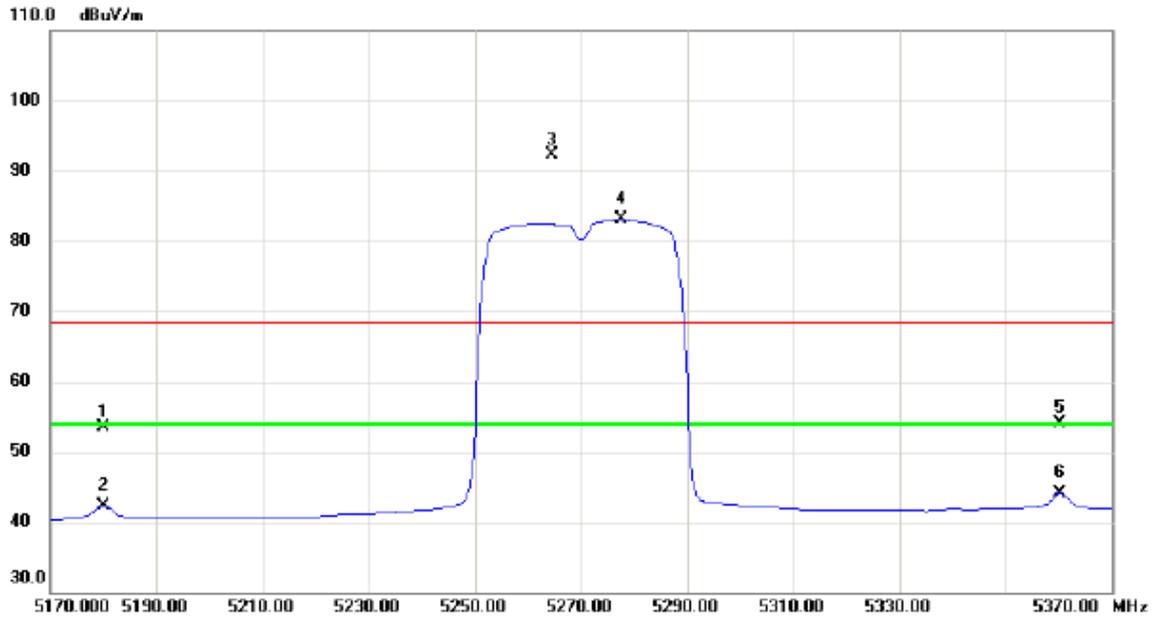


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5180.000	12.78	40.72	53.50	68.30	-14.80	peak	
2		5180.000	1.58	40.72	42.30	54.00	-11.70	AVG	
3	X	5264.600	51.21	41.01	92.22	68.30	23.92	peak	No Limit
4	*	5277.600	42.01	41.05	83.06	54.00	29.06	AVG	No Limit
5		5360.200	12.80	41.31	54.11	68.30	-14.19	peak	
6		5360.200	2.74	41.31	44.05	54.00	-9.95	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

### Vertical

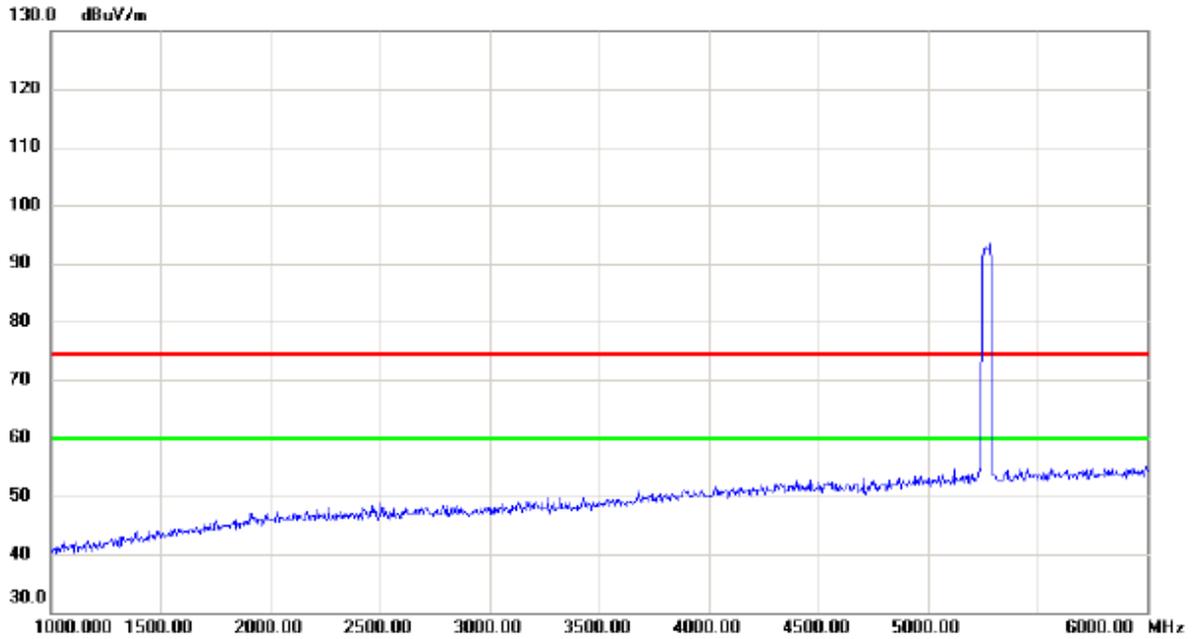


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

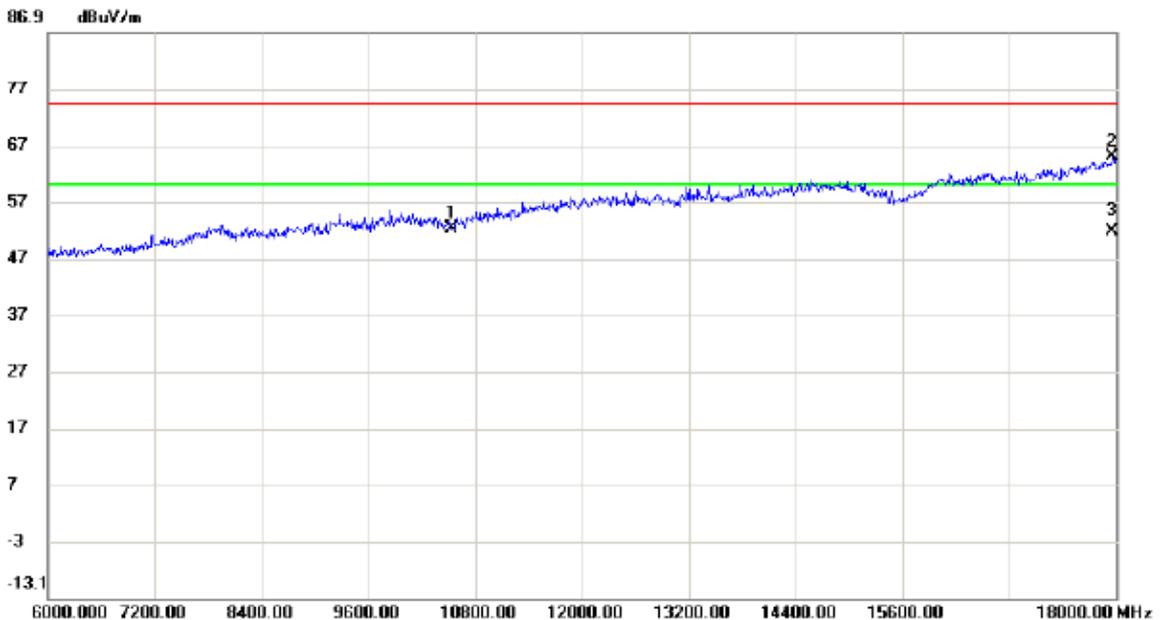


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10540.00	38.41	13.84	52.25	74.30	-22.05	peak	
2		17964.00	41.24	23.72	64.96	74.30	-9.34	peak	
3	*	17964.00	28.12	23.72	51.84	60.00	-8.16	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

### Vertical

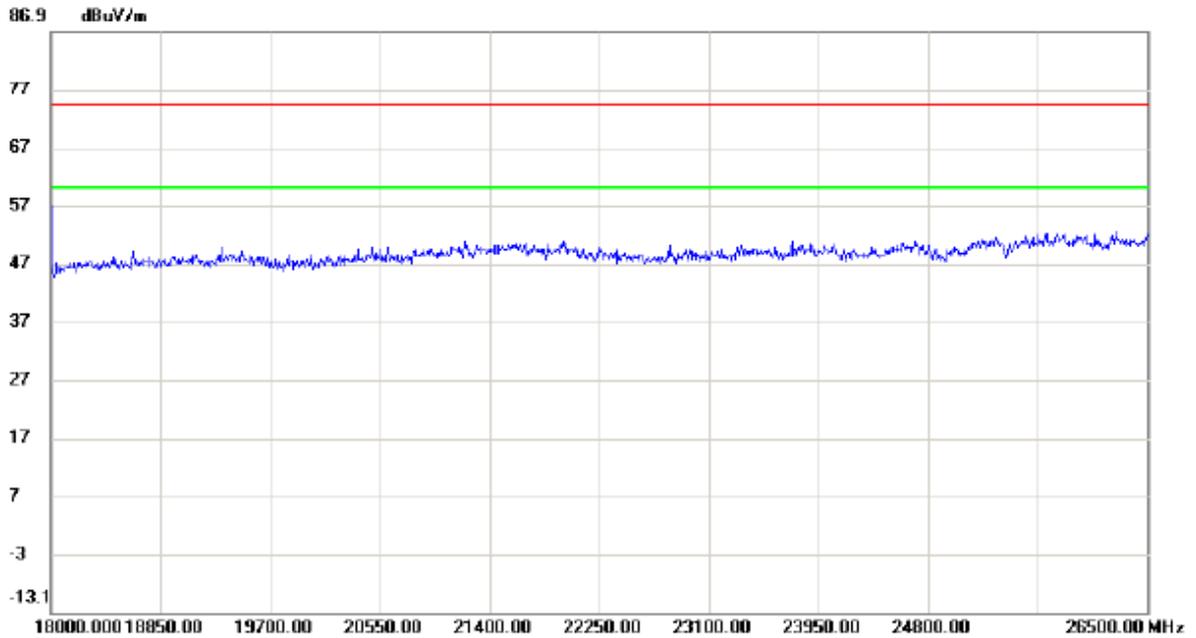


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

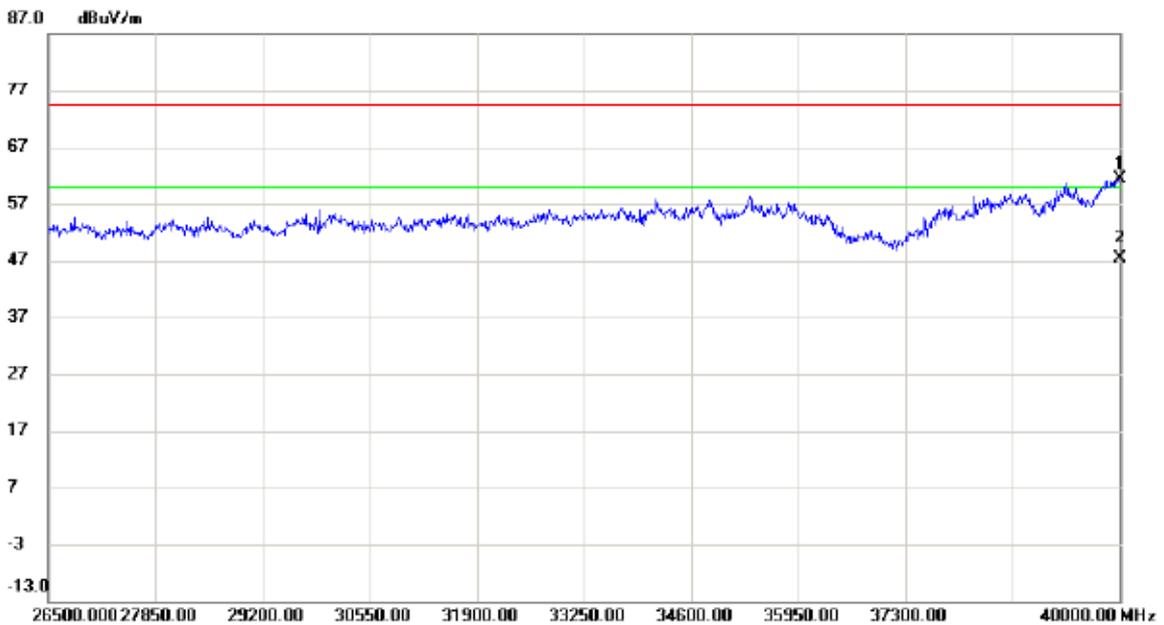

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		40000.00	43.73	17.60	61.33	74.30	-12.97	peak	
2	*	40000.00	29.76	17.60	47.36	60.00	-12.64	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


### Horizontal

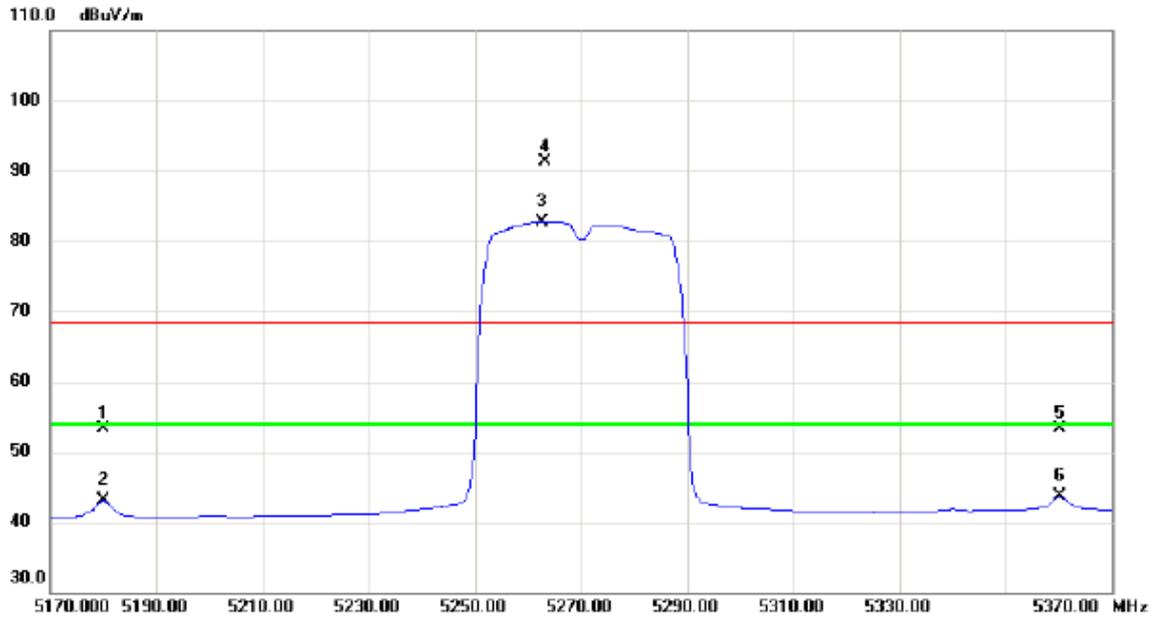


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5180.000	12.68	40.72	53.40	68.30	-14.90	peak	
2		5180.000	2.30	40.72	43.02	54.00	-10.98	AVG	
3	*	5262.600	41.77	41.00	82.77	54.00	28.77	AVG	No Limit
4	X	5263.200	50.25	41.00	91.25	68.30	22.95	peak	No Limit
5		5360.200	12.07	41.31	53.38	68.30	-14.92	peak	
6		5360.200	2.30	41.31	43.61	54.00	-10.39	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

### Horizontal

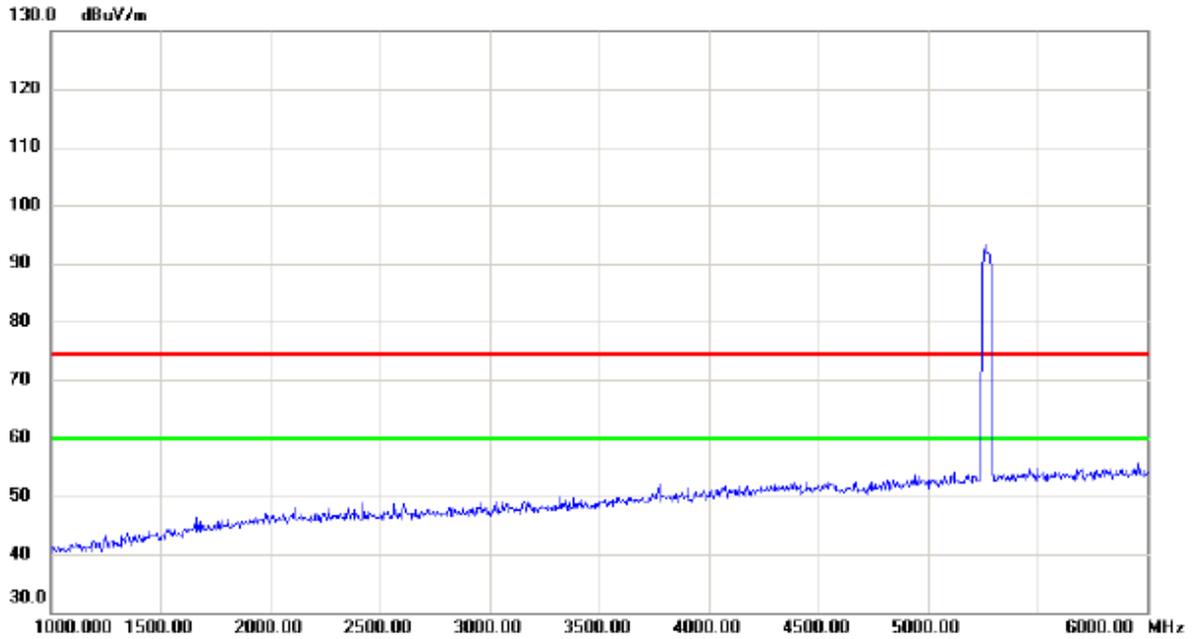


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

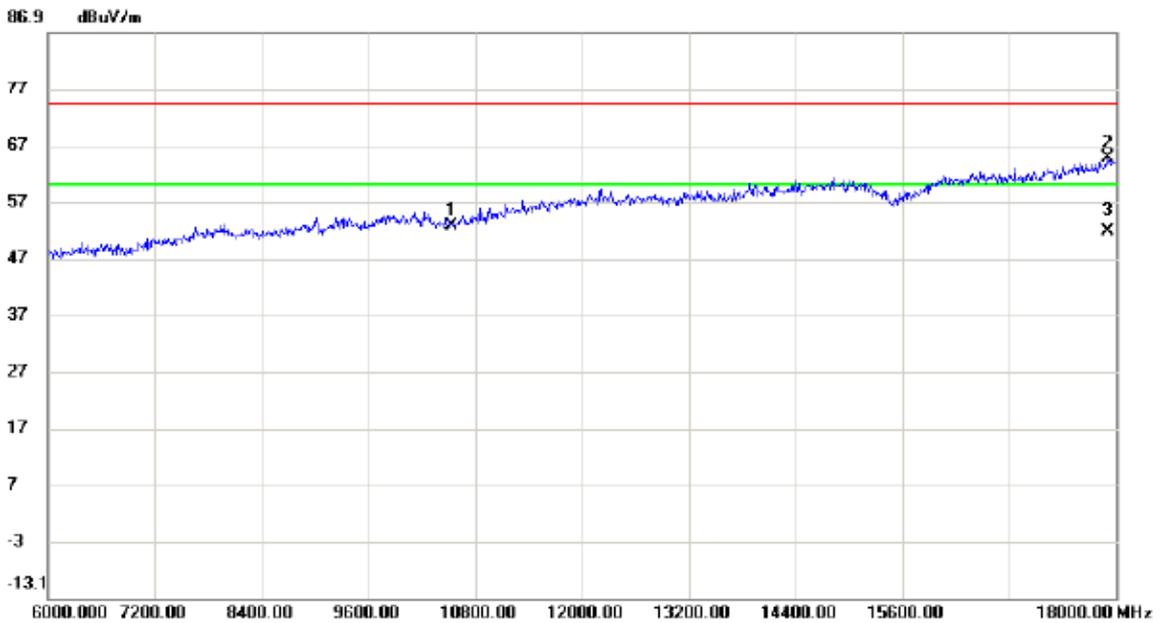


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10540.00	38.99	13.84	52.83	74.30	-21.47	peak	
2		17916.00	41.27	23.58	64.85	74.30	-9.45	peak	
3	*	17916.00	28.10	23.58	51.68	60.00	-8.32	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

### Horizontal

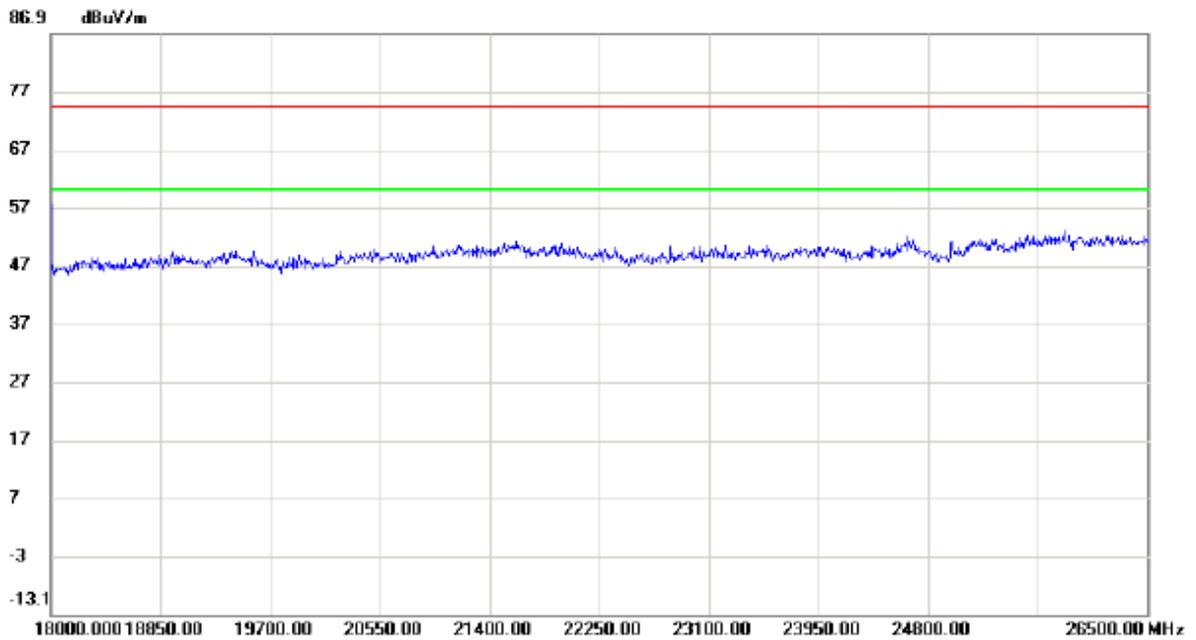


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

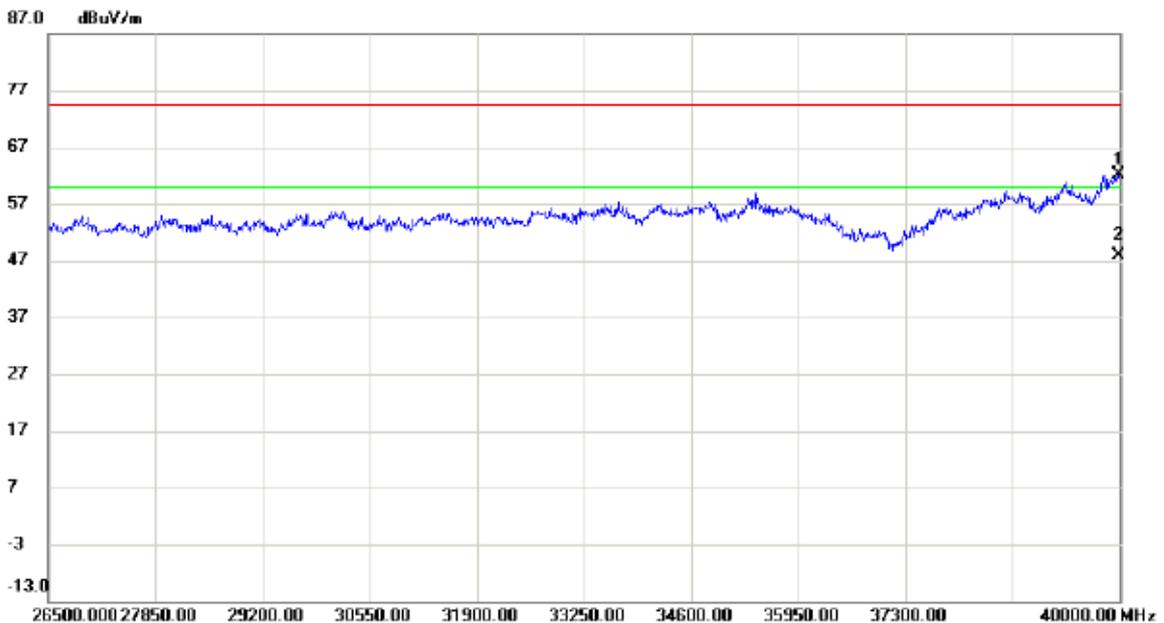

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39986.50	44.65	17.56	62.21	74.30	-12.09	peak	
2	*	39986.50	30.42	17.56	47.98	60.00	-12.02	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


### Vertical

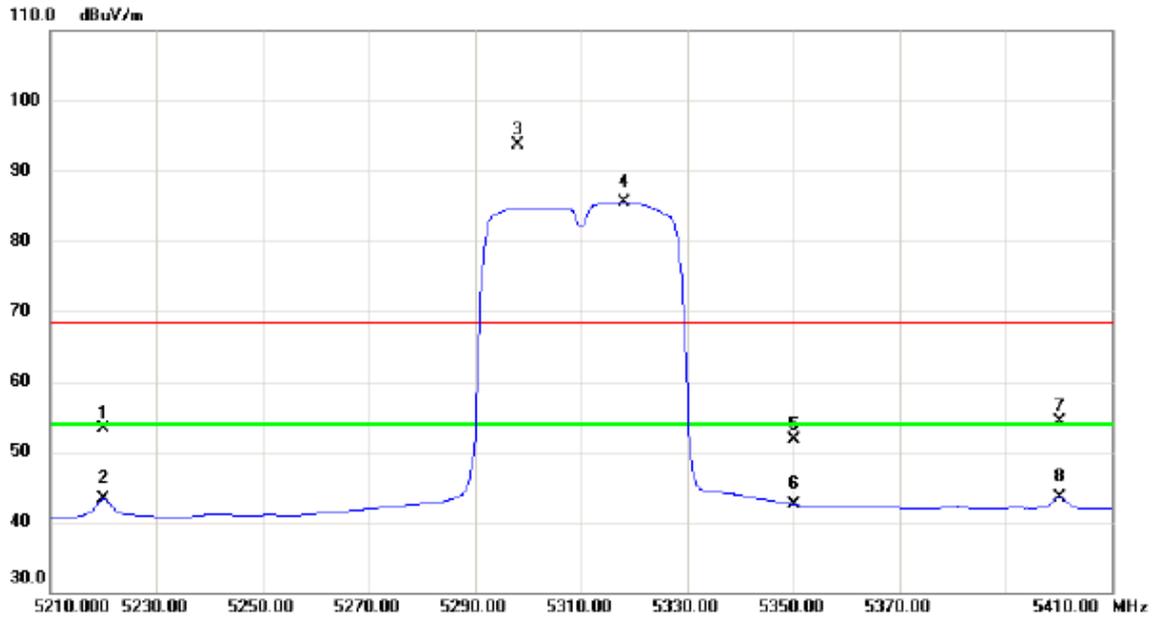


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5220.000	12.50	40.86	53.36	68.30	-14.94	peak	
2		5220.000	2.40	40.86	43.26	54.00	-10.74	AVG	
3	X	5298.200	52.49	41.12	93.61	68.30	25.31	peak	No Limit
4	*	5318.200	44.37	41.18	85.55	54.00	31.55	AVG	No Limit
5		5350.000	10.52	41.28	51.80	68.30	-16.50	peak	
6		5350.000	1.24	41.28	42.52	54.00	-11.48	AVG	
7		5400.200	12.85	41.45	54.30	68.30	-14.00	peak	
8		5400.200	2.08	41.45	43.53	54.00	-10.47	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

### Vertical

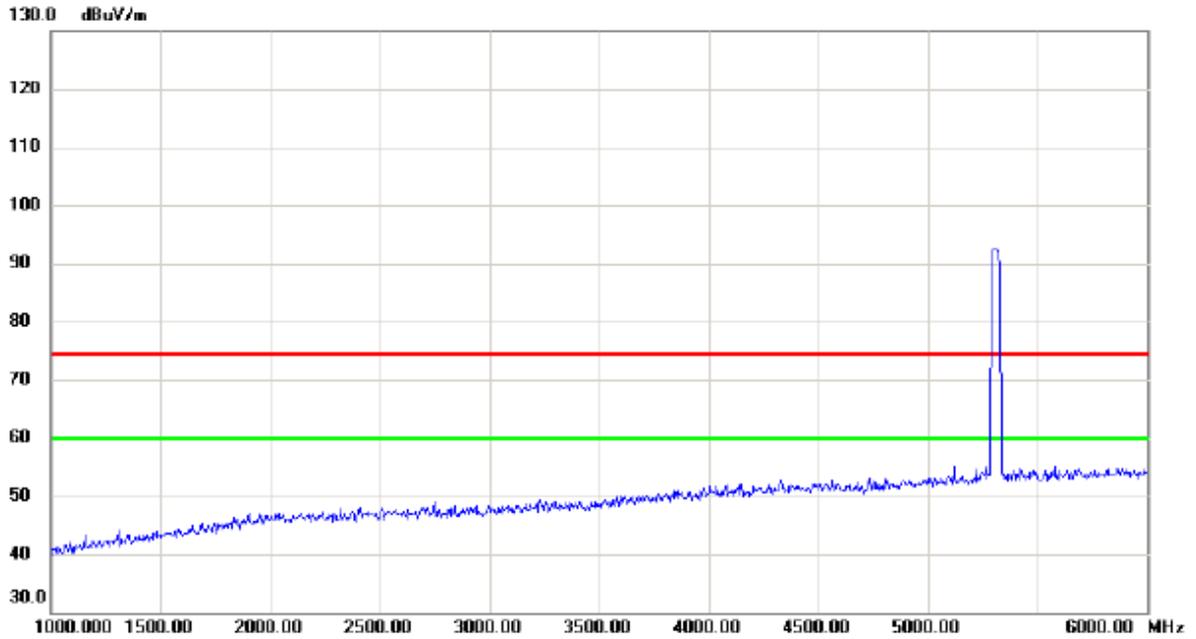


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

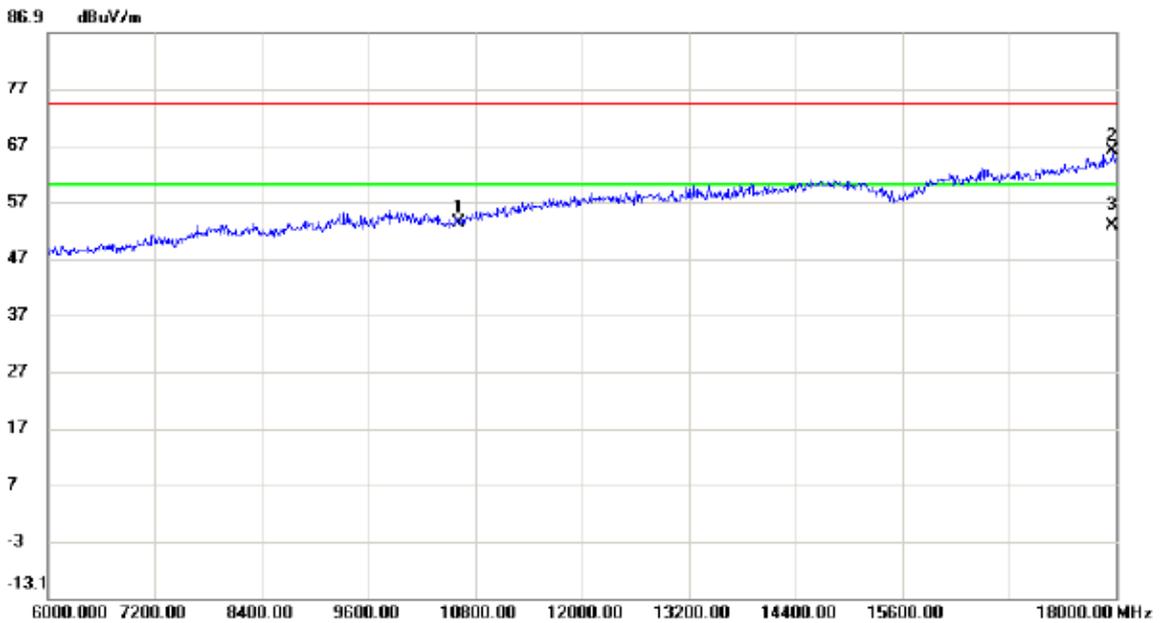

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	39.09	14.17	53.26	74.30	-21.04	peak	
2		17964.00	42.38	23.72	66.10	74.30	-8.20	peak	
3	*	17964.00	29.13	23.72	52.85	60.00	-7.15	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

### Vertical

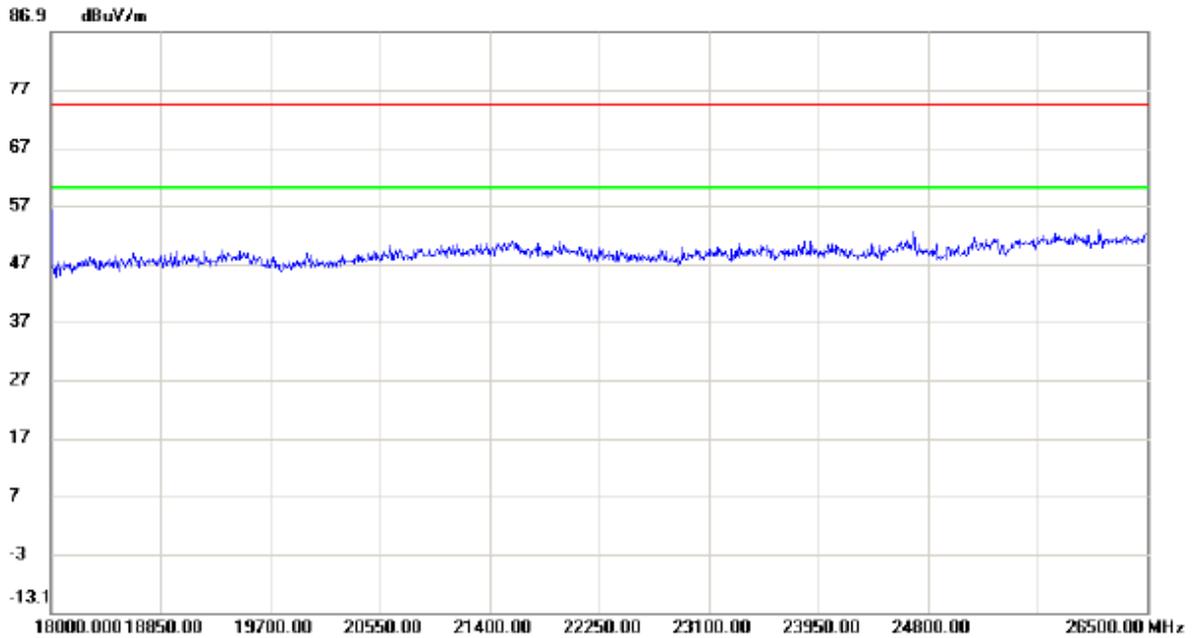


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39797.50	45.30	17.11	62.41	74.30	-11.89	peak	
2	*	39797.50	31.02	17.11	48.13	60.00	-11.87	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


### Horizontal

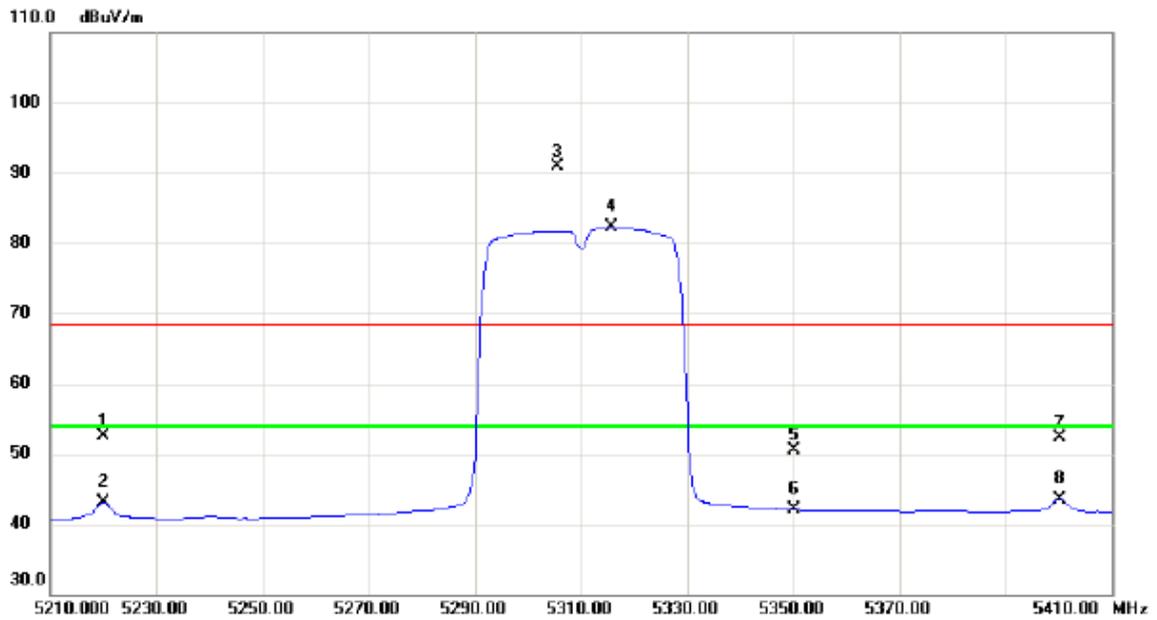


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5220.000	11.69	40.86	52.55	68.30	-15.75	peak	
2		5220.000	2.26	40.86	43.12	54.00	-10.88	AVG	
3	X	5305.600	49.75	41.14	90.89	68.30	22.59	peak	No Limit
4	*	5315.800	41.04	41.17	82.21	54.00	28.21	AVG	No Limit
5		5350.000	9.31	41.28	50.59	68.30	-17.71	peak	
6		5350.000	0.77	41.28	42.05	54.00	-11.95	AVG	
7		5400.200	10.84	41.45	52.29	68.30	-16.01	peak	
8		5400.200	2.15	41.45	43.60	54.00	-10.40	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

### Horizontal

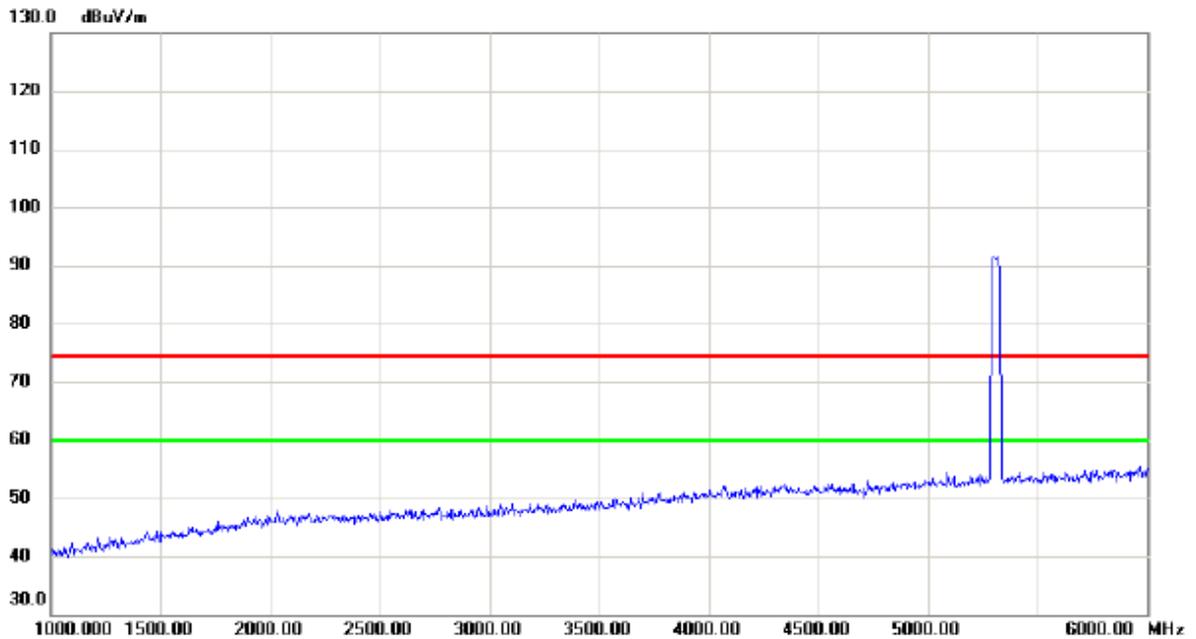


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

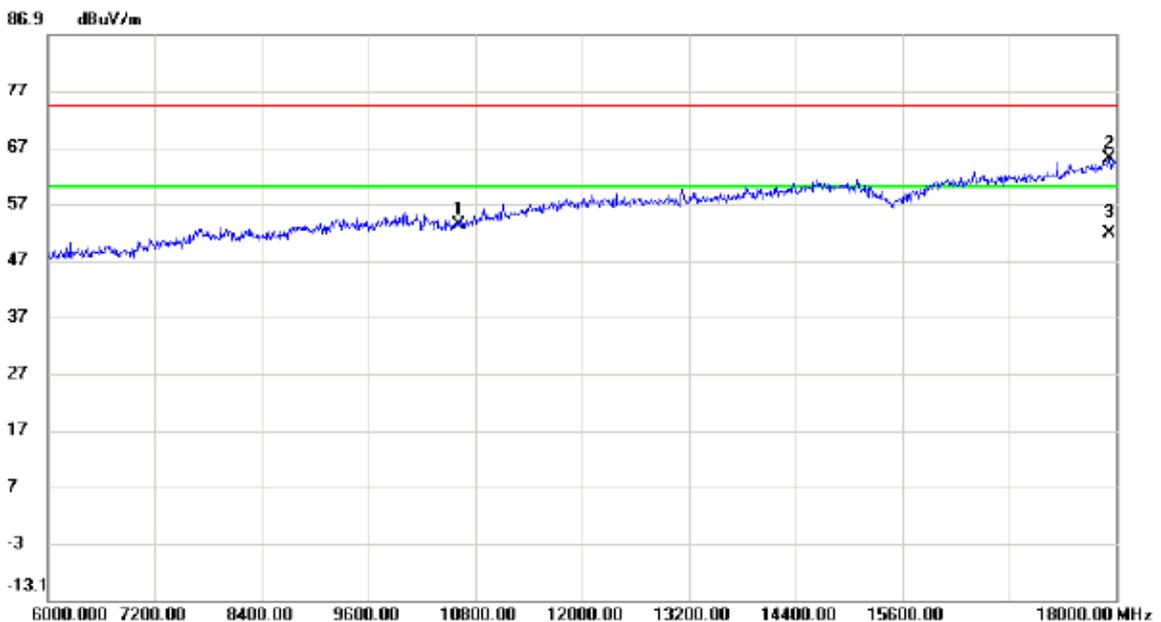


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	39.16	14.17	53.33	74.30	-20.97	peak	
2		17928.00	41.41	23.62	65.03	74.30	-9.27	peak	
3	*	17928.00	28.14	23.62	51.76	60.00	-8.24	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

### Horizontal

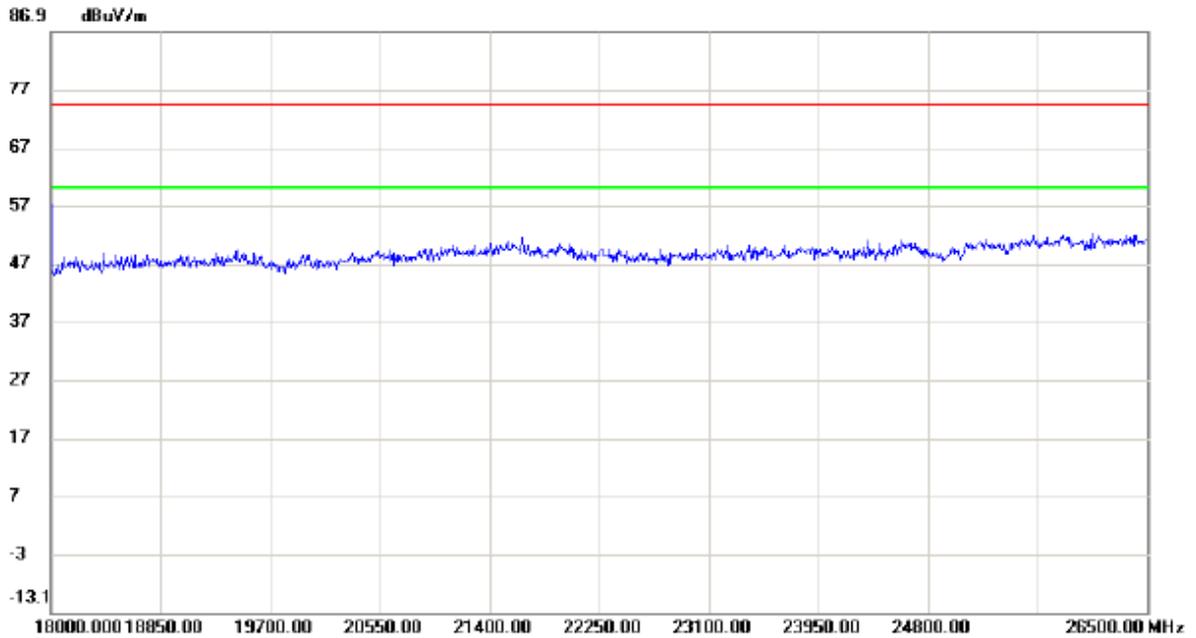


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

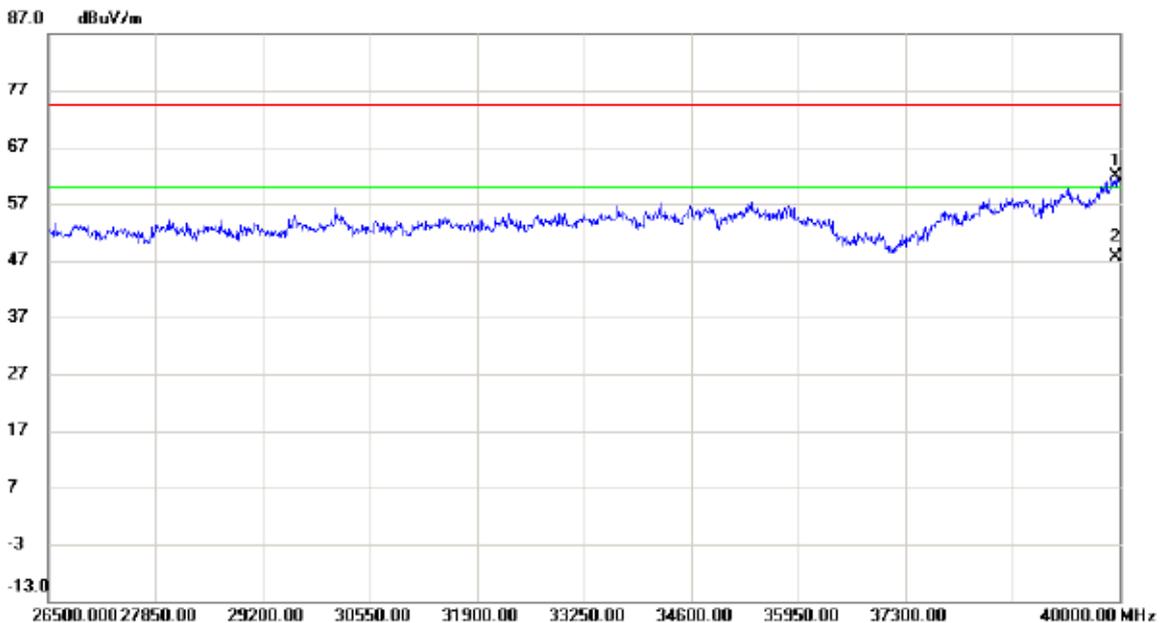

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39959.50	44.48	17.50	61.98	74.30	-12.32	peak	
2		39959.50	30.03	17.50	47.53	60.00	-12.47	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


### Vertical

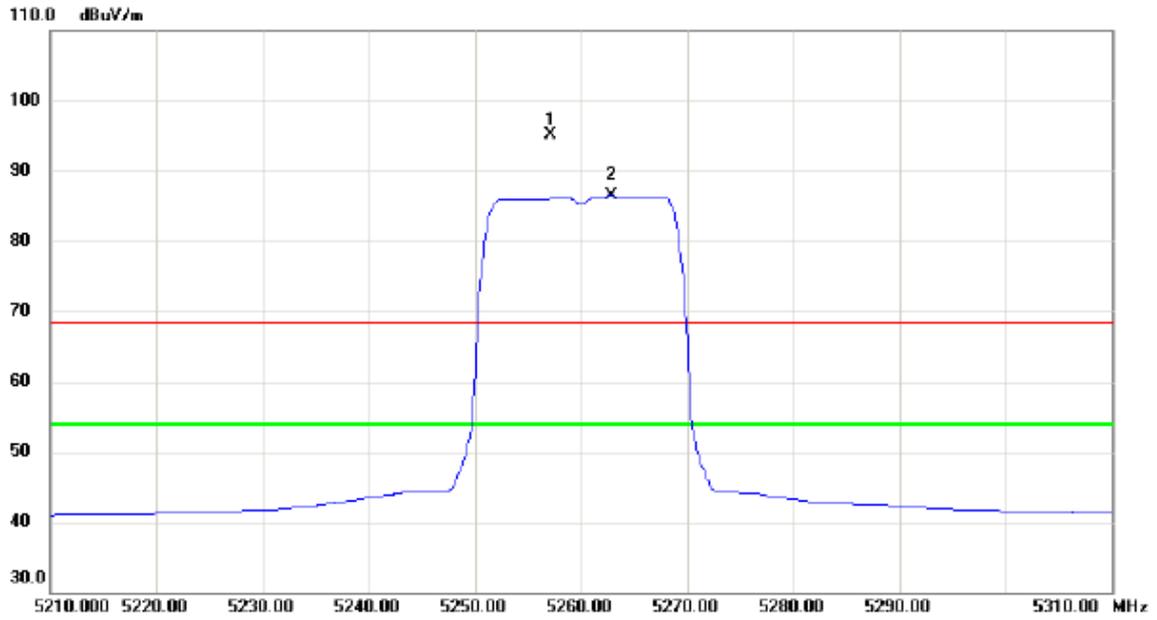


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5257.200	54.05	40.98	95.03	68.30	26.73	peak	No Limit
2	*	5262.900	45.41	41.00	86.41	54.00	32.41	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Vertical

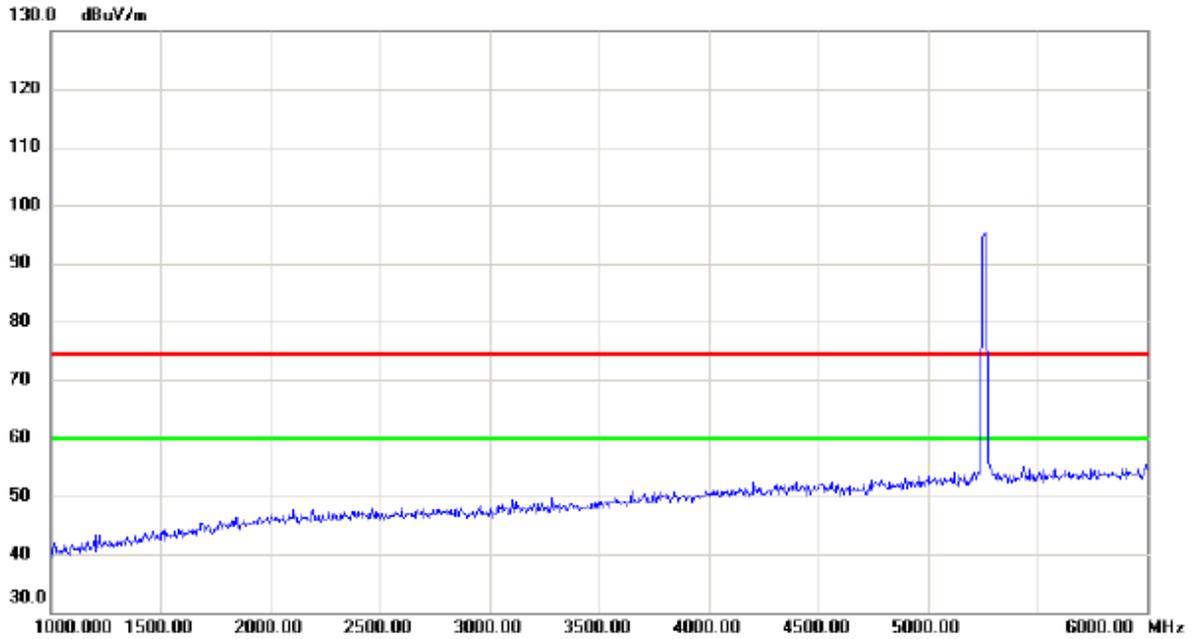


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

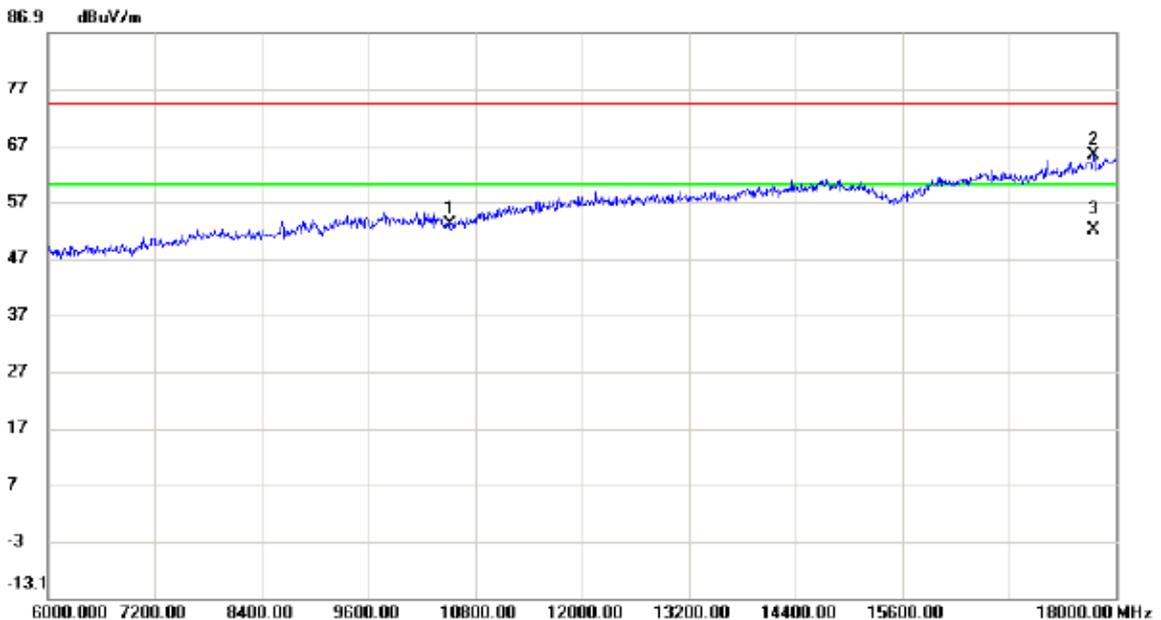


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10520.00	39.22	13.75	52.97	74.30	-21.33	peak	
2		17748.00	42.07	23.09	65.16	74.30	-9.14	peak	
3	*	17748.00	29.05	23.09	52.14	60.00	-7.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Vertical

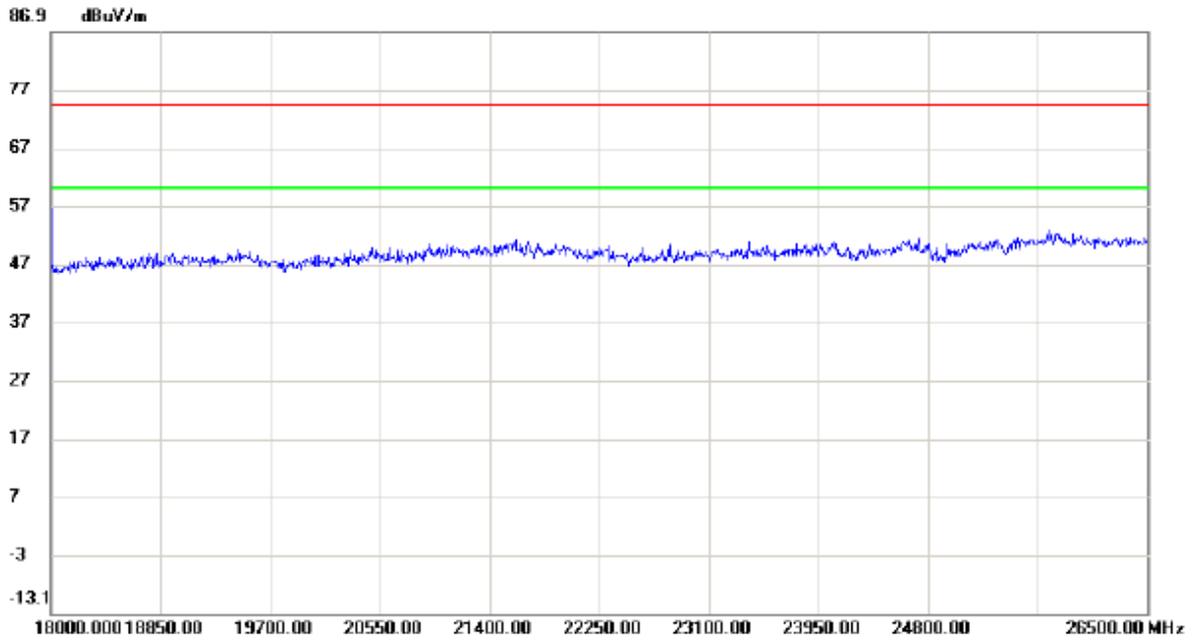


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

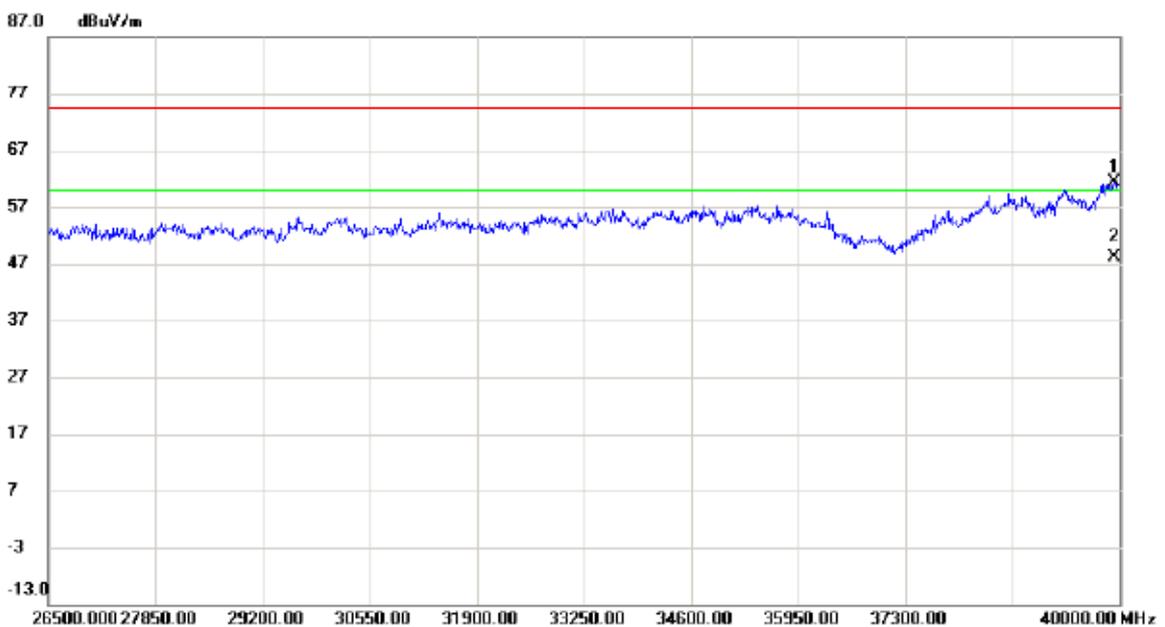

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	39932.50	43.95	17.43	61.38	74.30	-12.92	peak	
2 *	39932.50	30.76	17.43	48.19	60.00	-11.81	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


### Horizontal

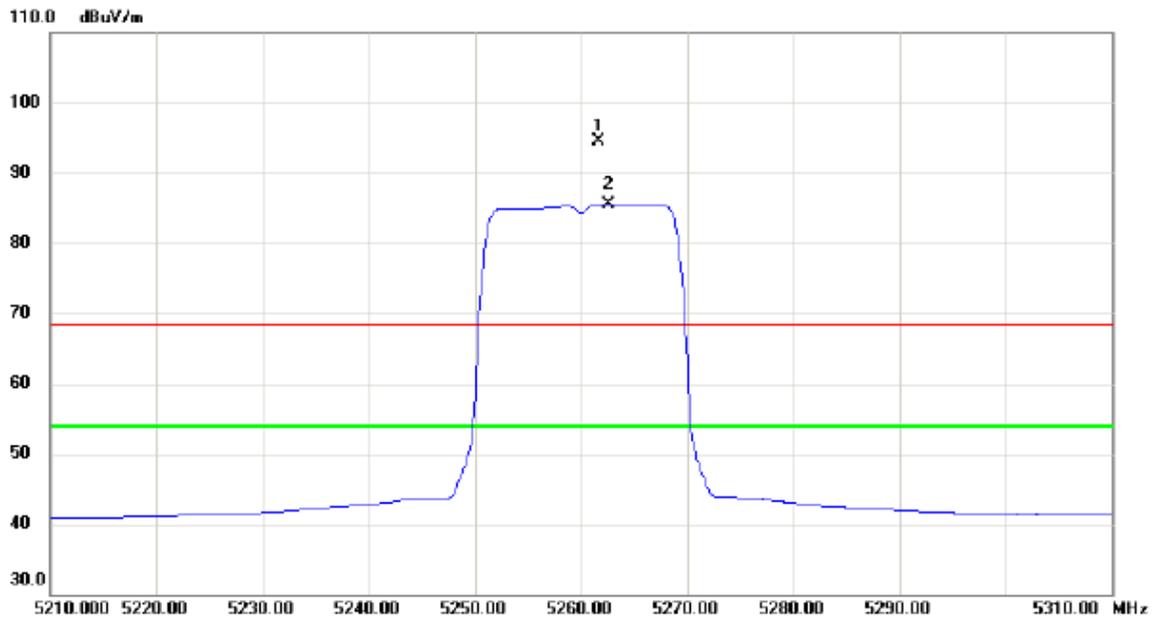


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5261.600	53.48	41.00	94.48	68.30	26.18	peak	No Limit
2	*	5262.600	44.53	41.00	85.53	54.00	31.53	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Horizontal

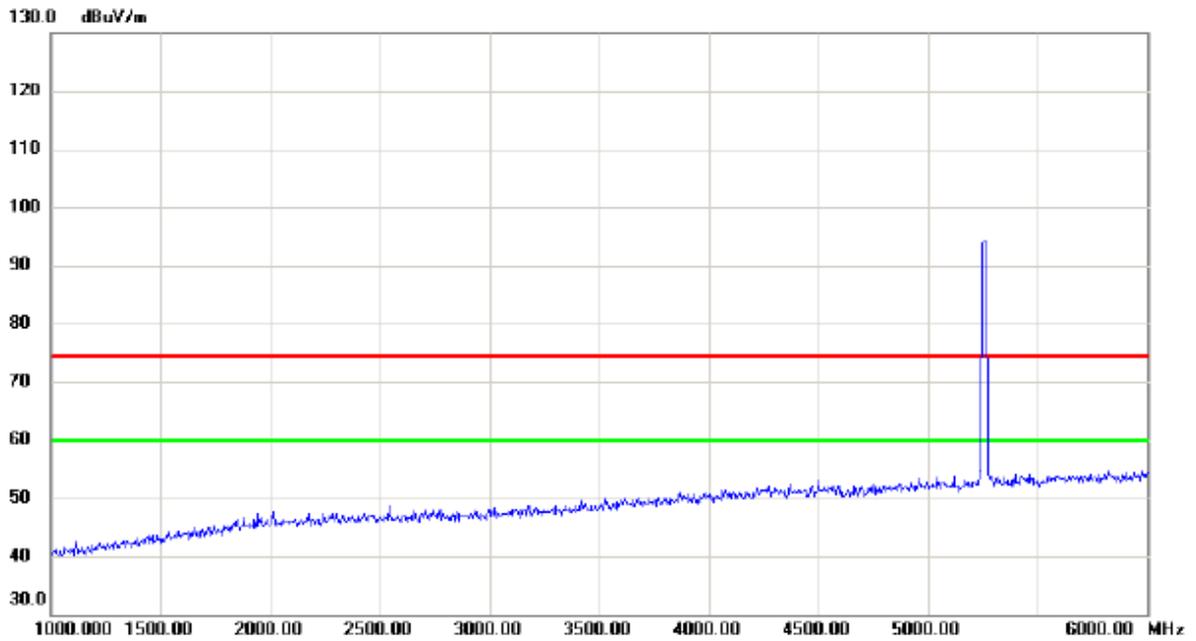


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

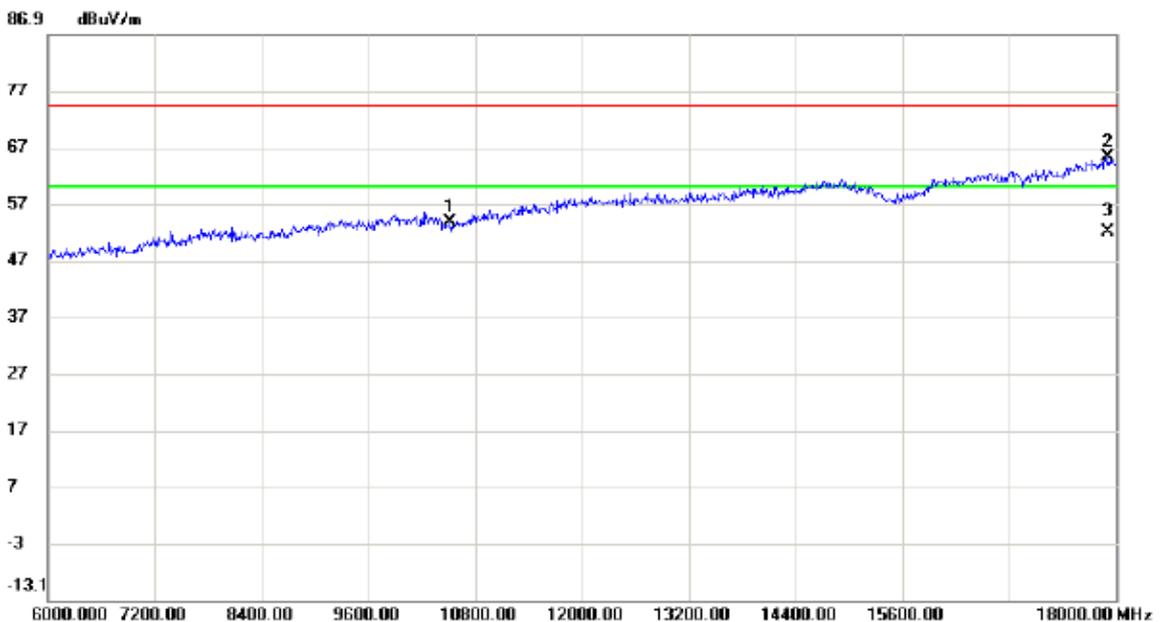


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10520.00	40.13	13.75	53.88	74.30	-20.42	peak	
2		17916.00	41.69	23.58	65.27	74.30	-9.03	peak	
3	*	17916.00	28.42	23.58	52.00	60.00	-8.00	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Horizontal

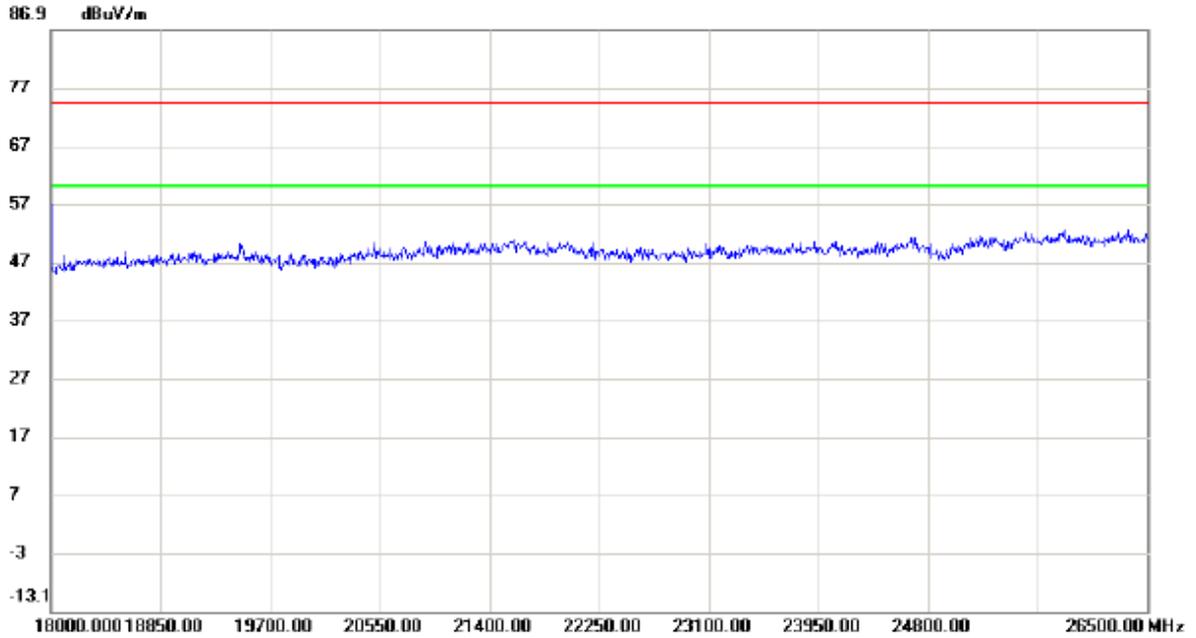


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

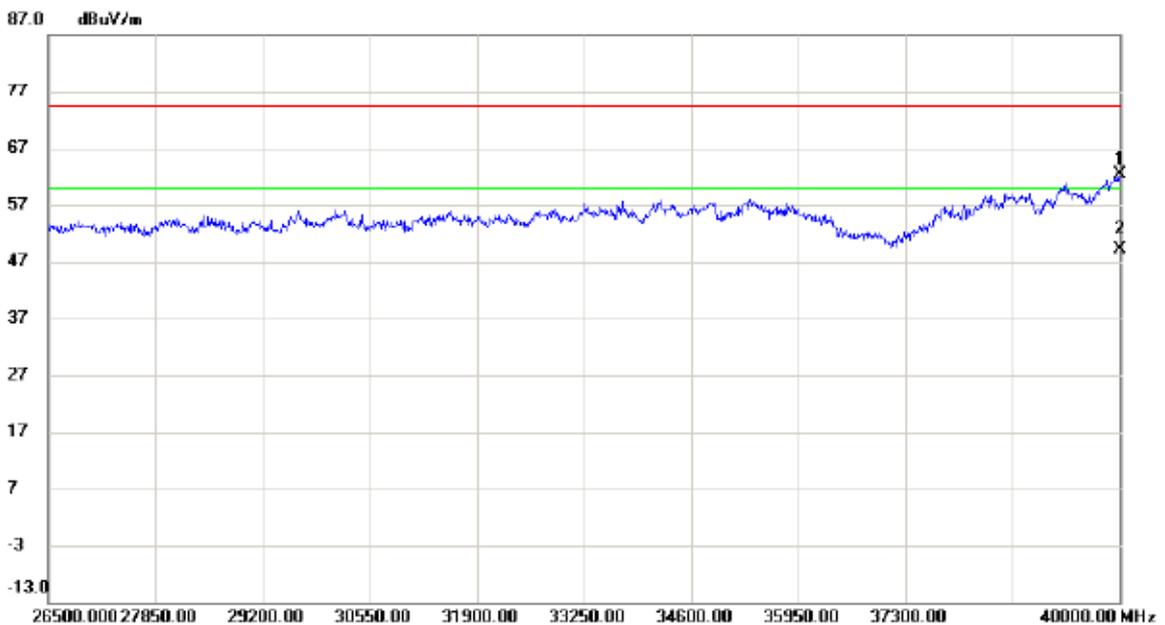

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	40000.00	44.78	17.60	62.38	74.30	-11.92	peak	
2 *	40000.00	31.46	17.60	49.06	60.00	-10.94	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


### Vertical

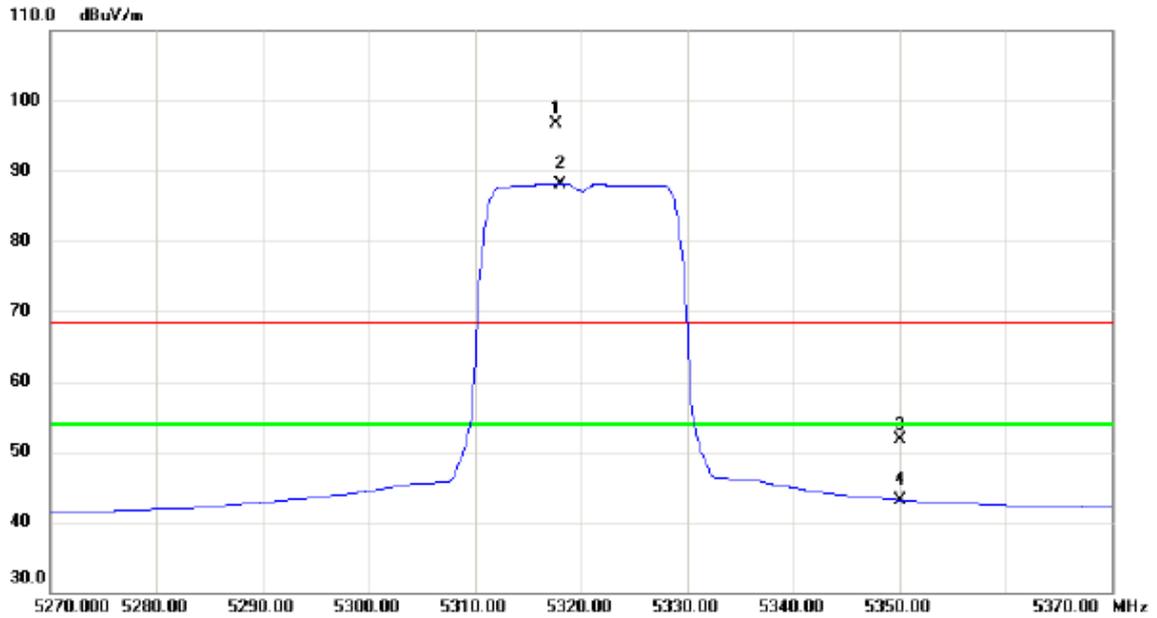


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5317.700	55.54	41.18	96.72	68.30	28.42	peak	No Limit
2	*	5318.100	46.95	41.18	88.13	54.00	34.13	AVG	No Limit
3		5350.000	10.49	41.28	51.77	68.30	-16.53	peak	
4		5350.000	1.86	41.28	43.14	54.00	-10.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Vertical

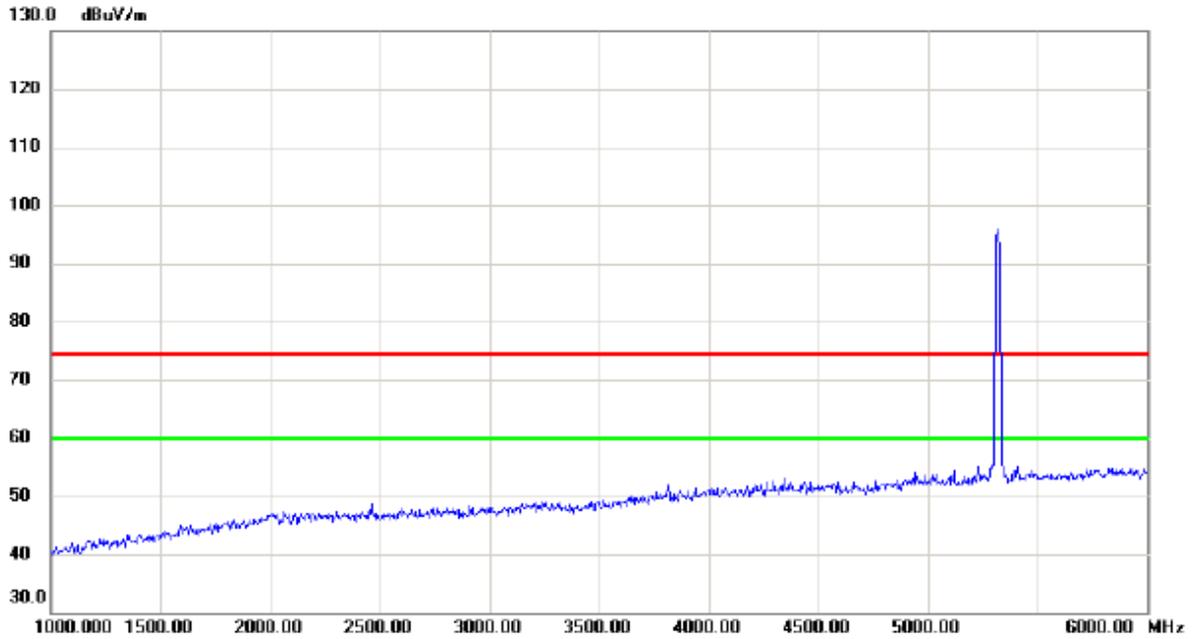


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

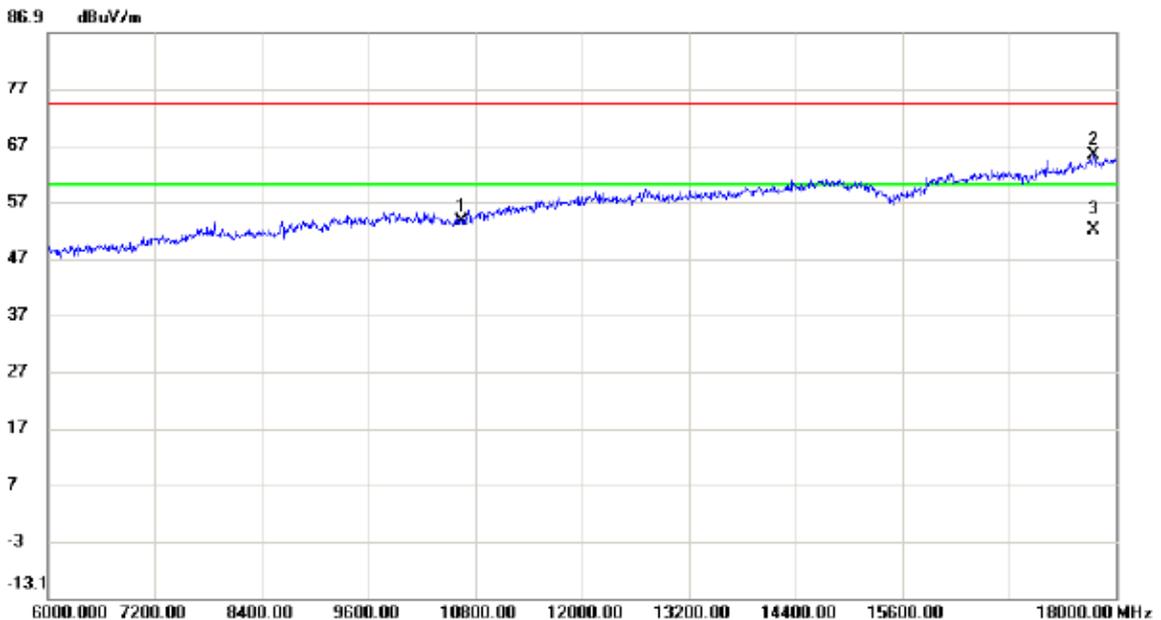


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	39.32	14.25	53.57	74.30	-20.73	peak	
2		17748.00	42.07	23.09	65.16	74.30	-9.14	peak	
3	*	17748.00	29.03	23.09	52.12	60.00	-7.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Vertical

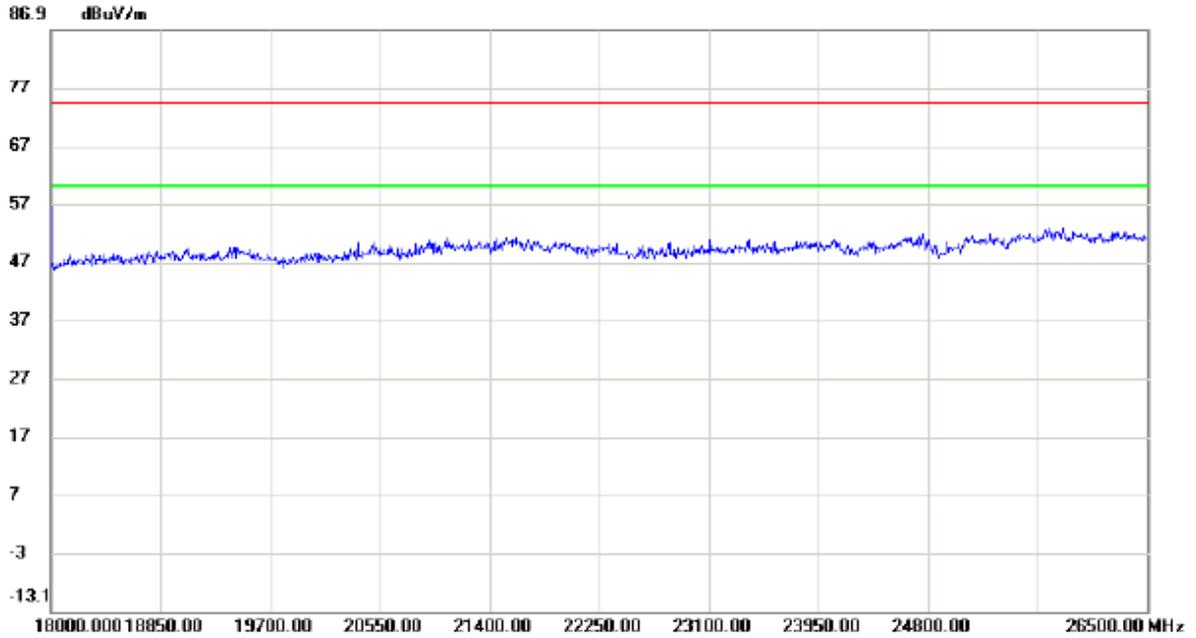


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

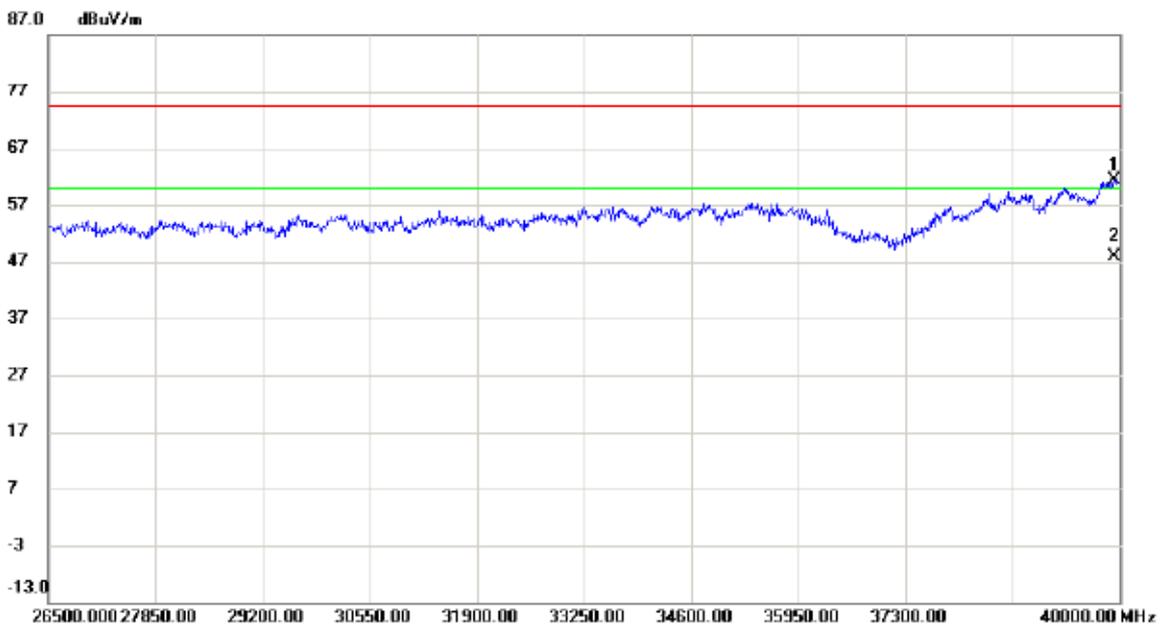

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	39932.50	43.95	17.43	61.38	74.30	-12.92	peak	
2 *	39932.50	30.42	17.43	47.85	60.00	-12.15	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


### Horizontal

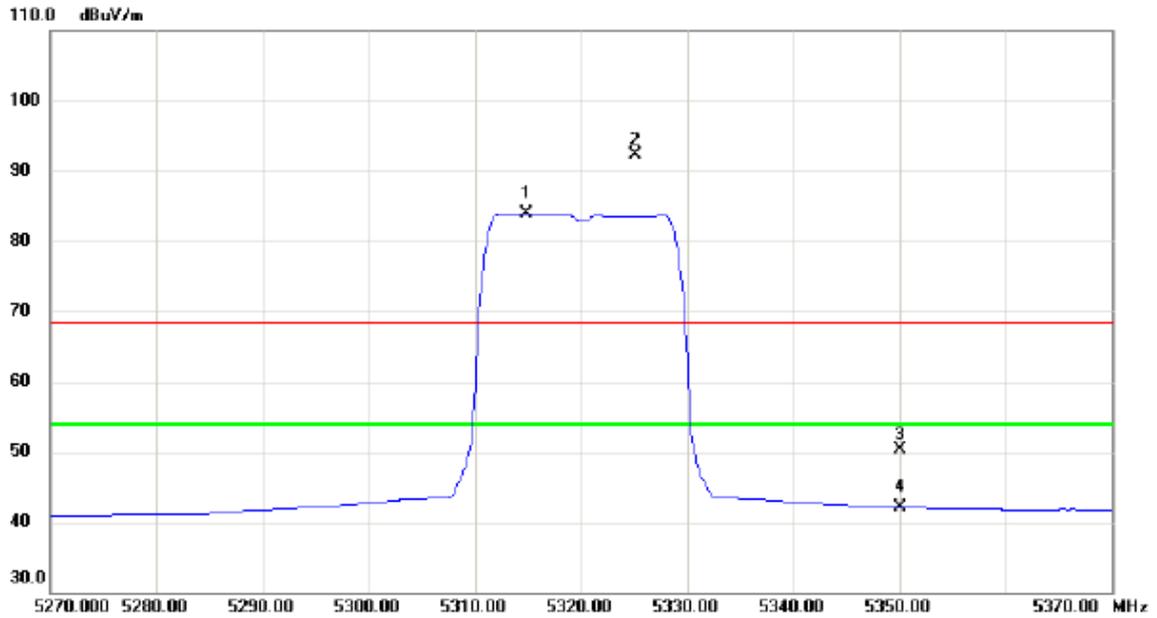


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5314.900	42.82	41.17	83.99	54.00	29.99	AVG	No Limit
2	X	5325.100	51.04	41.20	92.24	68.30	23.94	peak	No Limit
3		5350.000	9.04	41.28	50.32	68.30	-17.98	peak	
4		5350.000	0.84	41.28	42.12	54.00	-11.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Horizontal

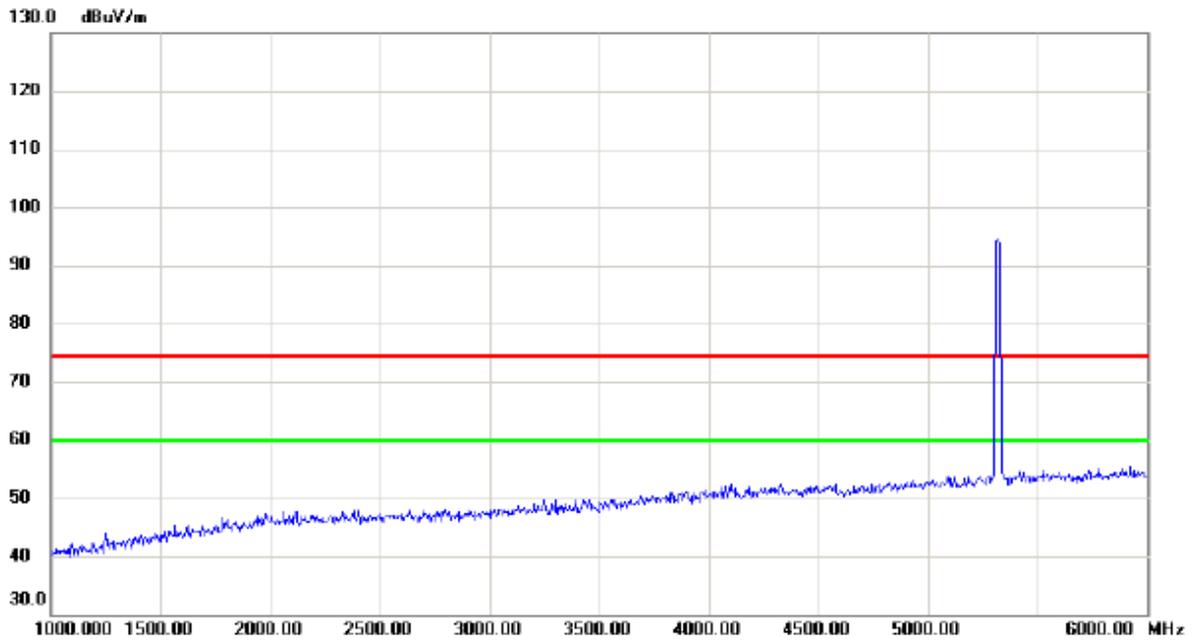


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

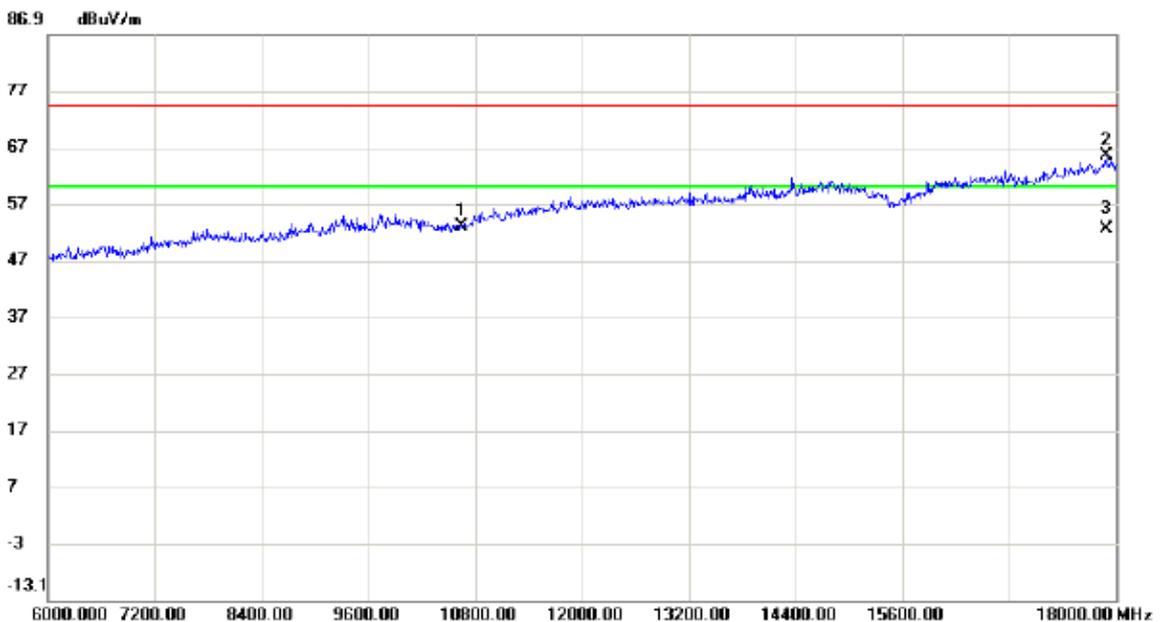


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	38.83	14.25	53.08	74.30	-21.22	peak	
2		17892.00	42.06	23.51	65.57	74.30	-8.73	peak	
3	*	17892.00	29.01	23.51	52.52	60.00	-7.48	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Horizontal

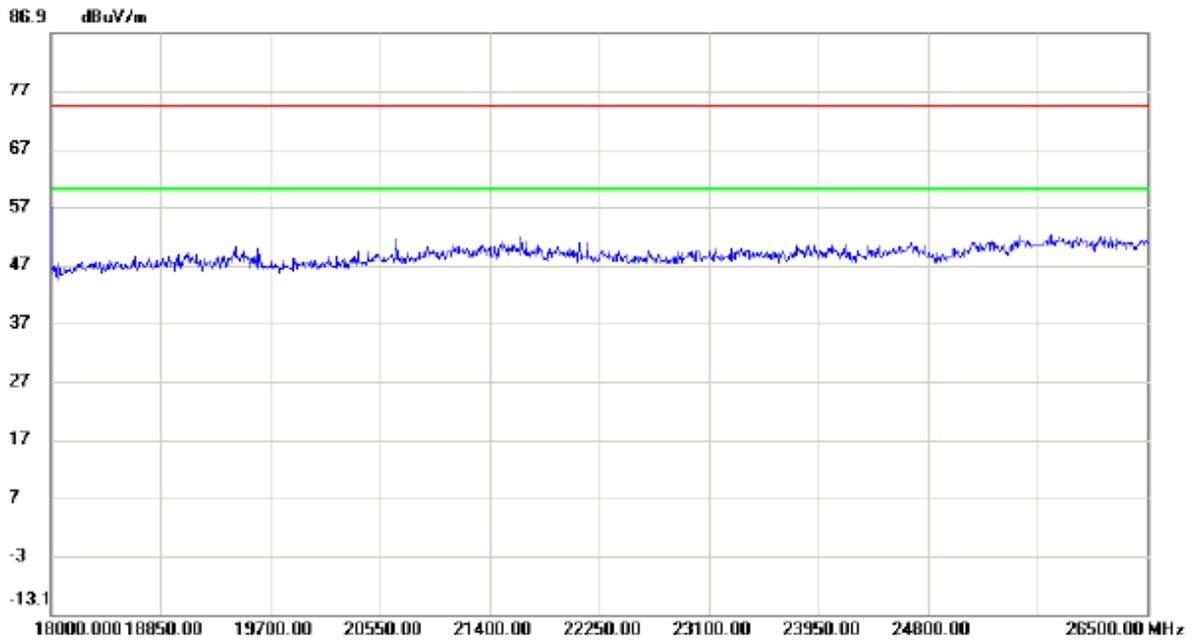

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

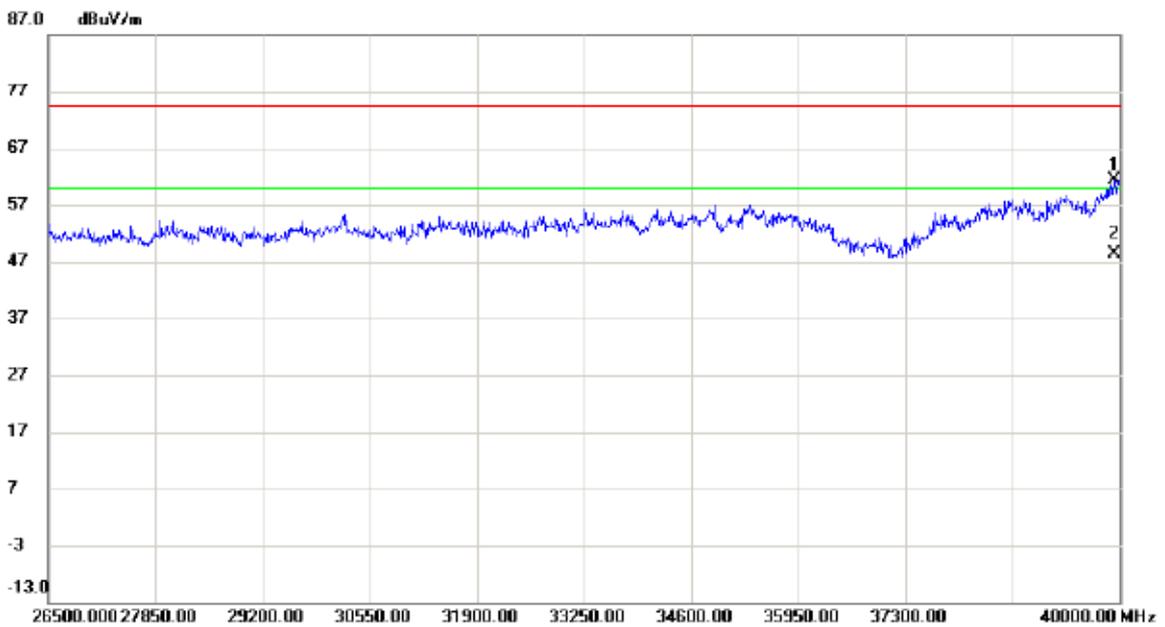

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39932.50	44.02	17.43	61.45	74.30	-12.85	peak	
2	*	39932.50	30.94	17.43	48.37	60.00	-11.63	AVG	